US010560989B2

(12) **United States Patent**
Jiang et al.

(10) **Patent No.: US 10,560,989 B2**
(45) **Date of Patent: Feb. 11, 2020**

(54) **LED TUBE LAMP**

(71) Applicant: **JIAXING SUPER LIGHTING ELECTRIC APPLIANCE CO., LTD**, Zhejiang (CN)

(72) Inventors: **Tao Jiang**, Zhejiang (CN); **Qifeng Ye**, Zhejiang (CN); **Yueqiang Zhang**, Zhejiang (CN)

(73) Assignee: **JIAXING SUPER LIGHTING ELECTRIC APPLIANCE CO., LTD**, Zhejiang (CN)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/373,200**

(22) Filed: **Apr. 2, 2019**

(65) **Prior Publication Data**

US 2019/0230756 A1 Jul. 25, 2019

Related U.S. Application Data

(63) Continuation of application No. 15/888,335, filed on Feb. 5, 2018, now Pat. No. 10,426,003, which is a (Continued)

(30) **Foreign Application Priority Data**

Sep. 28, 2014 (CN) 2014 1 0507660
Sep. 28, 2014 (CN) 2014 1 0508899
(Continued)

(51) **Int. Cl.**
H05B 33/08 (2006.01)
F21V 23/00 (2015.01)
(Continued)

(52) **U.S. Cl.**
CPC ***H05B 33/0812*** (2013.01); ***F21K 9/27*** (2016.08); ***F21K 9/278*** (2016.08); ***F21V 19/003*** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H05B 33/0812; H05B 33/0803; H05B 33/0809; H05B 33/0845; F21V 19/003;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,088,142 A * 2/1914 Gardner 221/231
6,246,167 B1 6/2001 Sica
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1292930 A 4/2001
CN 1460165 A 12/2003
(Continued)

Primary Examiner — Vibol Tan
(74) *Attorney, Agent, or Firm* — Andrew M. Calderon; Roberts Mlotkowski Safran Cole & Calderon, P.C.

(57) **ABSTRACT**

An LED tube lamp includes a tube having two ends, two end caps respectively at the ends of the tube, a power supply in one or both of the end caps, an LED light strip in the tube; and a plurality of LED light sources on the LED light strip. Each of the end caps comprises a lateral wall substantially coaxial with the tube, an end wall substantially perpendicular to an axial direction of the lateral wall, and at least one opening penetrating through the end wall. An axial direction of the at least one opening is substantially parallel with an axial direction of the lateral wall. The LED light sources electrically connected to the power supply via the LED light strip.

90 Claims, 66 Drawing Sheets

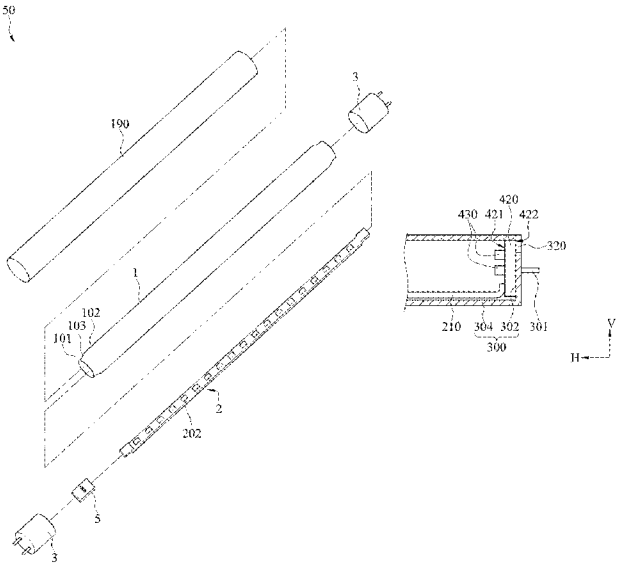

Current Lighting
EX1001

Related U.S. Application Data

continuation of application No. 15/643,034, filed on Jul. 6, 2017, now Pat. No. 10,021,742, which is a continuation-in-part of application No. 15/258,068, filed on Sep. 7, 2016, now Pat. No. 9,723,662, which is a continuation of application No. 14/699,138, filed on Apr. 29, 2015, now Pat. No. 9,480,109, and a continuation-in-part of application No. 15/298,955, filed on Oct. 20, 2016, now Pat. No. 9,845,923, which is a continuation of application No. 14/865,387, filed on Sep. 25, 2015, now Pat. No. 9,609,711, and a continuation-in-part of application No. 15/211,783, filed on Jul. 15, 2016, now Pat. No. 9,885,449, which is a continuation of application No. 15/087,088, filed on Mar. 31, 2016, now Pat. No. 9,879,852, and a continuation-in-part of application No. 15/483,368, filed on Apr. 10, 2017, now Pat. No. 9,945,520, which is a continuation of application No. 15/211,717, filed on Jul. 15, 2016, now Pat. No. 9,618,168, which is a continuation-in-part of application No. 15/056,121, filed on Feb. 29, 2016, now Pat. No. 9,447,929, and a continuation-in-part of application No. 15/168,962, filed on May 31, 2016, which is a continuation-in-part of application No. PCT/CN2015/096502, filed on Dec. 5, 2015, and a continuation-in-part of application No. 15/087,092, filed on Mar. 31, 2016, now Pat. No. 10,082,250, and a continuation-in-part of application No. 15/055,630, filed on Feb. 28, 2016, now Pat. No. 9,781,805, and a continuation-in-part of application No. 15/339,221, filed on Oct. 31, 2016, now Pat. No. 9,939,140, which is a continuation-in-part of application No. 15/210,989, filed on Jul. 15, 2016, now Pat. No. 9,587,817, which is a continuation-in-part of application No. 15/205,011, filed on Jul. 8, 2016, now Pat. No. 9,629,211, which is a continuation-in-part of application No. 15/150,458, filed on May 10, 2016, now Pat. No. 9,794,990, which is a continuation-in-part of application No. 14/865,387, filed on Sep. 25, 2015, now Pat. No. 9,609,711, and a continuation-in-part of application No. 14/699,138, filed on Apr. 29, 2015, now Pat. No. 9,480,109, and a continuation-in-part of application No. 15/066,645, filed on Mar. 10, 2016, now Pat. No. 9,497,821, which is a continuation-in-part of application No. 14/865,387, filed on Sep. 25, 2015, now Pat. No. 9,609,711.

(30) **Foreign Application Priority Data**

Oct. 17, 2014 (CN) ..... 2014 2 0602526 U
Nov. 6, 2014 (CN) 2014 1 0623355
Dec. 5, 2014 (CN) 2014 1 0734425
Feb. 12, 2015 (CN) 2015 1 0075925
Mar. 10, 2015 (CN) 2015 1 0104823
Mar. 25, 2015 (CN) 2015 1 0133689
Mar. 26, 2015 (CN) 2015 1 0134586
Mar. 27, 2015 (CN) 2015 1 0136796
Apr. 3, 2015 (CN) 2015 1 0155807
Apr. 14, 2015 (CN) 2015 1 0173861
Apr. 22, 2015 (CN) 2015 1 0193980
May 19, 2015 (CN) 2015 1 0259151
May 22, 2015 (CN) 2015 1 0268927
May 29, 2015 (CN) 2015 1 0284720
Jun. 10, 2015 (CN) 2015 1 0315636
Jun. 12, 2015 (CN) 2015 1 0324394
Jun. 17, 2015 (CN) 2015 1 0338027
Jun. 26, 2015 (CN) 2015 1 0364735
Jun. 26, 2015 (CN) 2015 1 0372375
Jun. 26, 2015 (CN) 2015 1 0373492
Jun. 29, 2015 (CN) 2015 1 0378322
Jul. 2, 2015 (CN) 2015 1 0391910
Jul. 10, 2015 (CN) 2015 1 0406595
Jul. 20, 2015 (CN) 2015 1 0428680
Jul. 27, 2015 (CN) 2015 1 0448220
Aug. 7, 2015 (CN) 2015 1 0482944
Aug. 8, 2015 (CN) 2015 1 0483475
Aug. 8, 2015 (CN) 2015 1 0486115
Aug. 14, 2015 (CN) 2015 1 0499512
Aug. 26, 2015 (CN) 2015 1 0530110
Sep. 2, 2015 (CN) 2015 1 0555543
Sep. 6, 2015 (CN) 2015 1 0557717
Sep. 18, 2015 (CN) 2015 1 0595173
Sep. 25, 2015 (CN) 2015 1 0617370
Oct. 8, 2015 (CN) 2015 1 0645134
Oct. 10, 2015 (CN) 2015 1 0651572
Oct. 20, 2015 (CN) 2015 1 0680883
Oct. 27, 2015 (CN) 2015 1 0705222
Oct. 29, 2015 (CN) 2015 1 0716899
Oct. 29, 2015 (CN) 2015 1 0724263
Oct. 30, 2015 (CN) 2015 1 0726365
Oct. 30, 2015 (CN) 2015 1 0726484
Nov. 27, 2015 (CN) 2015 1 0848766
Dec. 2, 2015 (CN) 2015 1 0868263
Dec. 9, 2015 (CN) 2015 1 0903680
Dec. 31, 2015 (CN) 2015 1 1025998
Jan. 22, 2016 (CN) 2016 1 0044148
Jan. 26, 2016 (CN) 2016 1 0050944
Jan. 26, 2016 (CN) 2016 1 0051691
Jan. 28, 2016 (CN) ..... 2016 2 0089157 U
Feb. 15, 2016 (CN) 2016 1 0085895
Feb. 16, 2016 (CN) 2016 1 0087627
Feb. 23, 2016 (CN) 2016 1 0098424
Mar. 3, 2016 (CN) 2016 1 0120993
Mar. 4, 2016 (CN) 2016 1 0123852
Mar. 4, 2016 (CN) ..... 2016 2 0165131 U
Mar. 9, 2016 (CN) 2016 1 0132513
Mar. 14, 2016 (CN) 2016 1 0142140
Mar. 25, 2016 (CN) 2016 1 0177706
Apr. 22, 2016 (CN) 2016 1 0256190
Apr. 29, 2016 (CN) 2016 1 0281812
May 18, 2016 (CN) 2016 1 0327806
May 27, 2016 (CN) 2016 1 0363805
Jun. 14, 2016 (CN) 2016 1 0420790
Jun. 20, 2016 (CN) 2016 1 0452437
Oct. 8, 2016 (CN) 2016 1 0876593

(51) **Int. Cl.**
F21K 9/27 (2016.01)
F21K 9/278 (2016.01)
F21V 19/00 (2006.01)
F21V 23/02 (2006.01)

(52) **U.S. Cl.**
CPC ***F21V 23/009*** (2013.01); ***F21V 23/023*** (2013.01); ***H05B 33/0803*** (2013.01); ***H05B 33/0809*** (2013.01); *H05B 33/0845* (2013.01); *Y02B 20/343* (2013.01); *Y02B 20/345* (2013.01)

(58) **Field of Classification Search**
CPC F21V 23/023; F21V 23/009; F21K 9/278; F21K 9/27; Y02B 20/343; Y02B 20/345
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,067,032	B1	6/2006	Bremont et al.	
7,594,738	B1	9/2009	Lin et al.	
7,611,260	B1	11/2009	Lin	
8,240,875	B2	8/2012	Roberts et al.	
8,360,599	B2	1/2013	Ivey et al.	
8,456,075	B2	6/2013	Axelsson	
9,000,668	B2	4/2015	Qiu	
9,288,867	B2 *	3/2016	Hsia	H05B 33/0884
9,322,531	B2	4/2016	Liang et al.	
9,448,660	B2	9/2016	Seo et al.	
9,625,137	B2	4/2017	Li et al.	
9,723,662	B2 *	8/2017	Ye	F21V 23/009
9,864,438	B2	1/2018	Seo et al.	
9,885,449	B2 *	2/2018	Jiang	F21K 9/278
10,021,742	B2	7/2018	Jiang	
10,208,898	B2 *	2/2019	Xiong	F21V 3/061
2003/0189829	A1	10/2003	Shimizu et al.	
2004/0189218	A1	9/2004	Leong	
2005/0162101	A1	7/2005	Leong et al.	
2005/0162850	A1	7/2005	Luk	
2005/0185396	A1	8/2005	Kutler	
2007/0001709	A1	1/2007	Shen	
2008/0055894	A1	3/2008	Deng et al.	
2008/0192476	A1	8/2008	Hiratsuka	
2008/0290814	A1	11/2008	Leong	
2009/0040415	A1	2/2009	Kim	
2009/0159919	A1	6/2009	Simon et al.	
2009/0160369	A1 *	6/2009	Godbole	H05B 33/0815 315/307
2009/0219713	A1	9/2009	Siemiet et al.	
2010/0066230	A1	3/2010	Lin et al.	
2010/0124054	A1	5/2010	Chen et al.	
2010/0201269	A1	8/2010	Tzou et al.	
2010/0220469	A1	9/2010	Ivey et al.	
2010/0253226	A1 *	10/2010	Oki	F21V 3/00 315/113
2010/0277918	A1 *	11/2010	Chen	F21V 23/00 362/249.02
2011/0038146	A1	2/2011	Chen	
2011/0084554	A1	4/2011	Tian	
2011/0084608	A1	4/2011	Lin et al.	
2011/0084627	A1	4/2011	Sloan et al.	
2011/0149563	A1	6/2011	Hsia et al.	
2011/0175536	A1	7/2011	Fujita et al.	
2011/0279063	A1	11/2011	Wang et al.	
2011/0305021	A1	12/2011	Xin	
2011/0309745	A1	12/2011	Westermarck et al.	
2012/0026761	A1	2/2012	Young	
2012/0049684	A1	3/2012	Bodenstein et al.	
2012/0051039	A1	3/2012	Chang	
2012/0069556	A1	3/2012	Bertram et al.	
2012/0146503	A1	6/2012	Negley et al.	
2012/0212951	A1	8/2012	Lai et al.	
2012/0319150	A1	12/2012	Shimomura et al.	
2013/0021809	A1	1/2013	Dellian et al.	
2013/0033881	A1	2/2013	Terazawa et al.	
2013/0033888	A1	2/2013	Van Der Wel et al.	
2013/0050998	A1	2/2013	Chu et al.	
2013/0051008	A1	2/2013	Shew	
2013/0069538	A1	3/2013	So	
2013/0135852	A1	5/2013	Chan et al.	
2013/0135857	A1	5/2013	Chen et al.	
2013/0215609	A1	8/2013	Liu et al.	
2013/0223053	A1	8/2013	Liu et al.	
2013/0230995	A1	9/2013	Ivey et al.	
2013/0235570	A1	9/2013	Hood et al.	
2013/0250565	A1	9/2013	Chiang et al.	
2013/0256704	A1	10/2013	Hsiao	
2013/0258650	A1	10/2013	Sharrah	
2013/0293098	A1	11/2013	Li et al.	
2013/0301255	A1	11/2013	Kim et al.	
2014/0009923	A1	1/2014	Wu	
2014/0153231	A1	6/2014	Bittmann	
2014/0192526	A1	7/2014	Qiu	
2014/0203717	A1	7/2014	Zhang	
2014/0225519	A1	8/2014	Yu et al.	
2014/0331532	A1	11/2014	Deppiesse	
2015/0070885	A1	3/2015	Petro et al.	
2015/0176770	A1	6/2015	Wilcox et al.	
2015/0345755	A1	12/2015	Purdy	
2016/0081147	A1	3/2016	Guang	
2016/0091147	A1	3/2016	Jiang et al.	
2017/0290119	A1	10/2017	Xiong et al.	

FOREIGN PATENT DOCUMENTS

CN	1914458	A	2/2007
CN	200980183	Y	11/2007
CN	101092545	A	12/2007
CN	201014273	Y	1/2008
CN	101228393	A	7/2008
CN	201363601	Y	12/2009
CN	201437921	U	4/2010
CN	201515528	U *	6/2010
CN	101787273	A	7/2010
CN	201555053	U	8/2010
CN	102016661	A	4/2011
CN	201866575	U	6/2011
CN	102116460	A	7/2011
CN	102121690	A	7/2011
CN	201954169	U	8/2011
CN	201954350	U	8/2011
CN	202100985	U	1/2012
CN	202120982	U	1/2012
CN	202125774	U	1/2012
CN	102359697	A	2/2012
CN	202216003	U	5/2012
CN	102518972	A	6/2012
CN	202281101	U	6/2012
CN	202302841	U	7/2012
CN	202392485	U	8/2012
CN	102720901	A	10/2012
CN	102777788	A	11/2012
CN	202546288	U	11/2012
CN	202546330	U	11/2012
CN	102889446	A	1/2013
CN	103016984	A	4/2013
CN	202852551	U	4/2013
CN	202884614	U	4/2013
CN	103195999	A	7/2013
CN	203068187	U	7/2013
CN	203162856	U	8/2013
CN	203202766	U	9/2013
CN	203240337	U	10/2013
CN	203240362	U	10/2013
CN	103411140	A	11/2013
CN	203464014	U	3/2014
CN	103742875	A	4/2014
CN	203517629	U	4/2014
CN	203549435	U	4/2014
CN	103822121	A	5/2014
CN	203615157	U	5/2014
CN	103851547	A	6/2014
CN	103943752	A	7/2014
CN	203686635	U	7/2014
CN	103968272	A	8/2014
CN	203771102	U	8/2014
CN	104033772	A	9/2014
CN	203848055	U	9/2014
CN	203857296	U	10/2014
CN	203927469	U	11/2014
CN	203963553	U	11/2014
CN	204042527	U	12/2014
CN	204083927	U	1/2015
CN	104515014	A	4/2015
CN	104565931	A	4/2015
CN	204268162	U	4/2015
CN	204300737	U	4/2015
CN	103411140	B	5/2015
CN	104595765	A	5/2015
CN	204420636	U	6/2015
CN	104776332	A	7/2015
CN	104832813	A	8/2015
CN	204534210	U	8/2015

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

CN	204573639	U	8/2015
CN	204573682	U	8/2015
CN	204573684	U	8/2015
CN	204573700	U	8/2015
CN	204693095	U	10/2015
CN	204879985	U	12/2015
CN	104033772	B	6/2016
CN	205447315	U	8/2016
DE	202012011550	U1	6/2013
EP	2554899	A2	2/2013
EP	3146803	A1	3/2017
GB	2519258	A	4/2015
GB	2523275	A	8/2015
GB	2531425	A	4/2016
JP	2005122906	A	5/2005
JP	2008117666	A	5/2008
JP	3147313	U	12/2008
JP	2011061056	A	3/2011
JP	2013254667	A	12/2013
JP	2014154479	A	8/2014
KR	20090118147	A	11/2009
KR	20120055349	A	5/2012
WO	2009111098	A2	9/2009
WO	2012129301	A1	9/2012
WO	2013125803	A1	8/2013
WO	2014045523	A1	3/2014
WO	2014117435	A1	8/2014
WO	2014118754	A1	8/2014
WO	2015081809	A1	6/2015
WO	2016086901	A3	6/2016

* cited by examiner

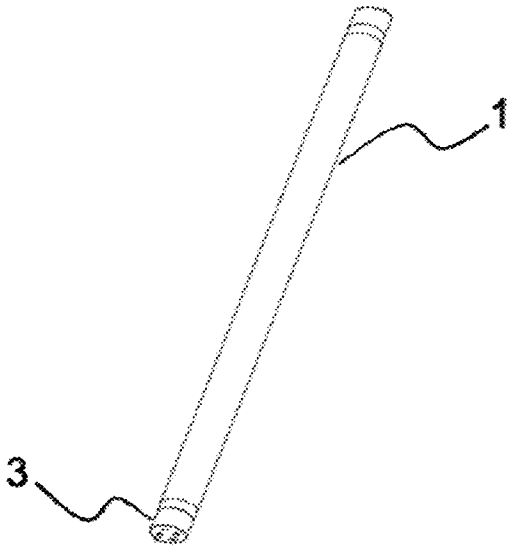

Fig. 1

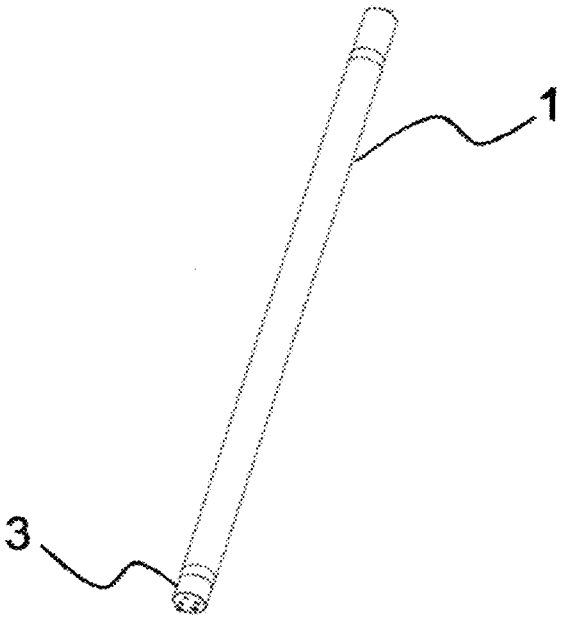

Fig. 1A

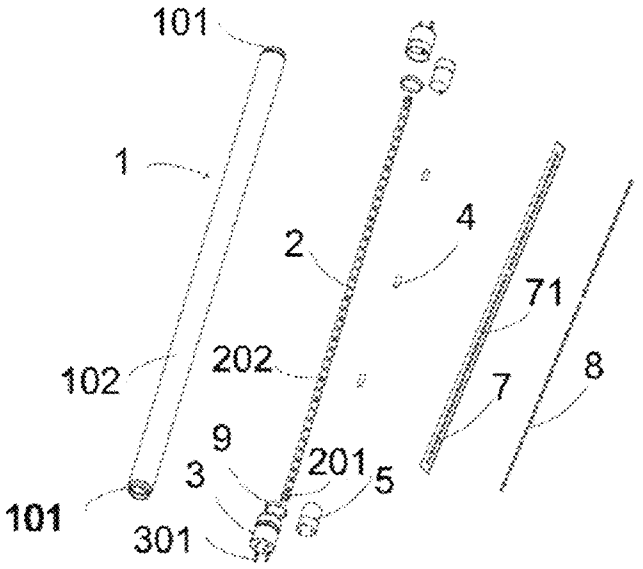

Fig. 1B

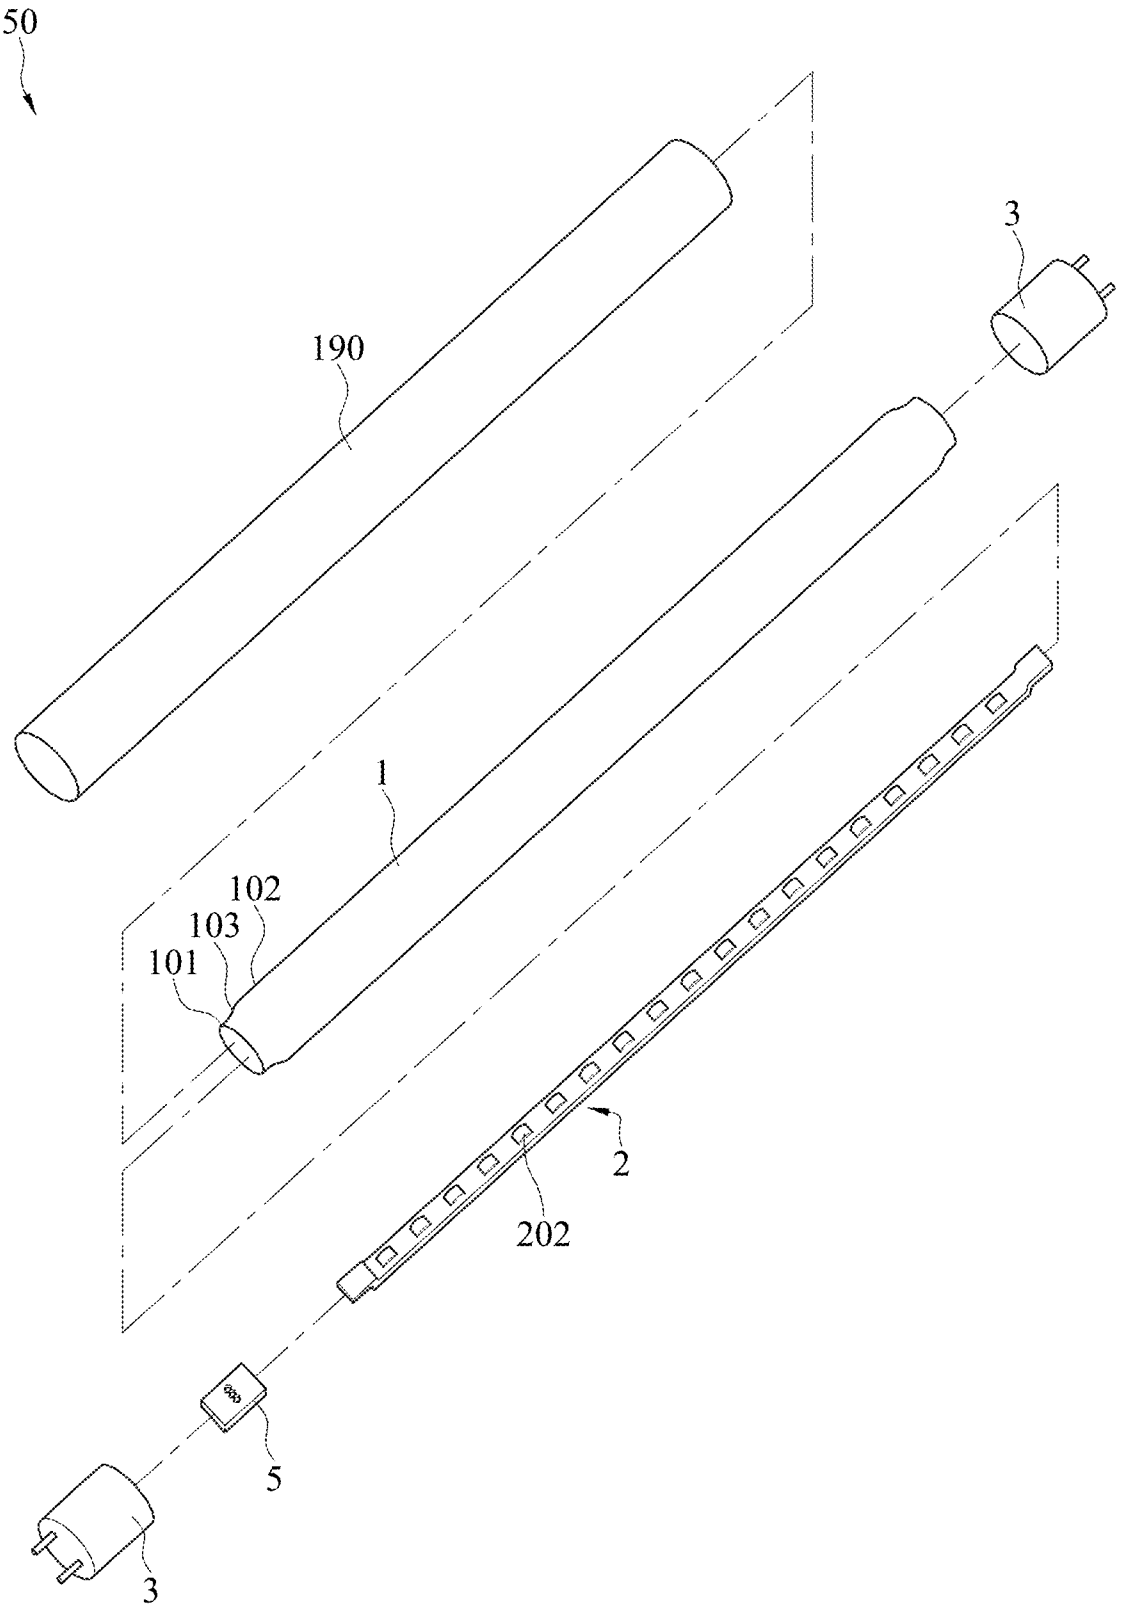

Fig. 2

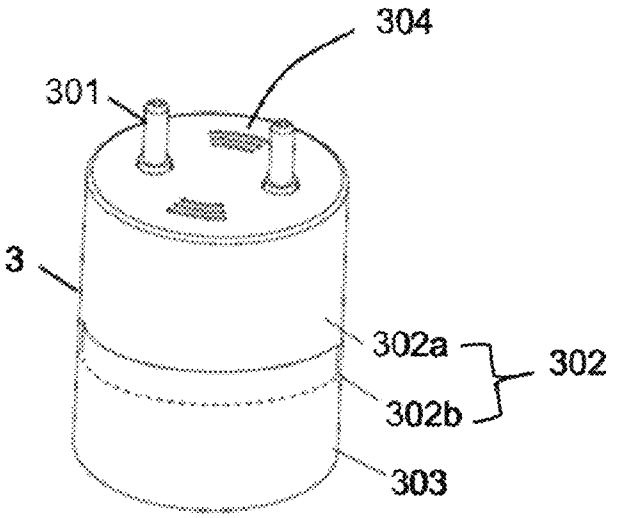

Fig. 3

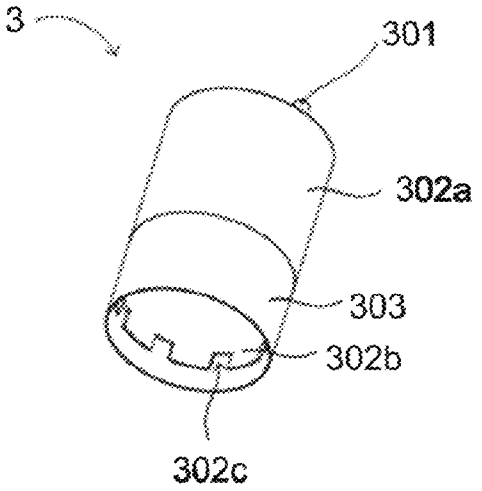

Fig. 4

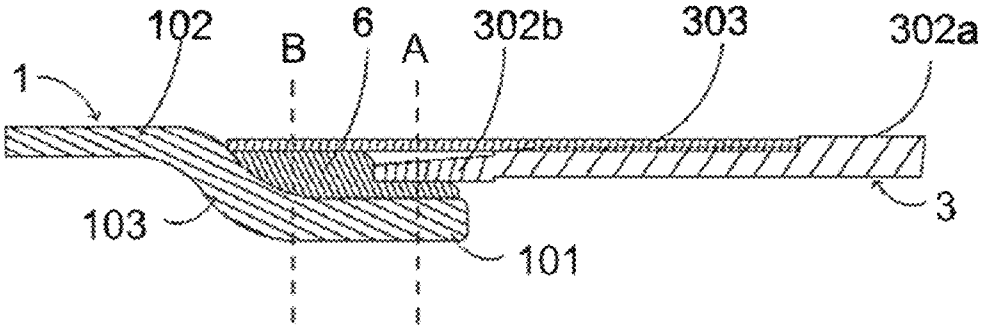

Fig. 5

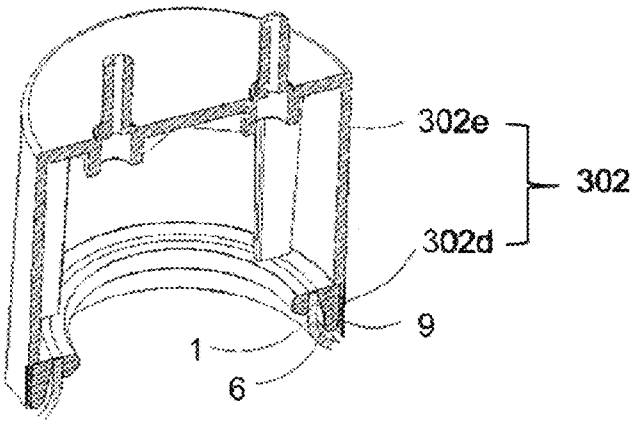

Fig. 6

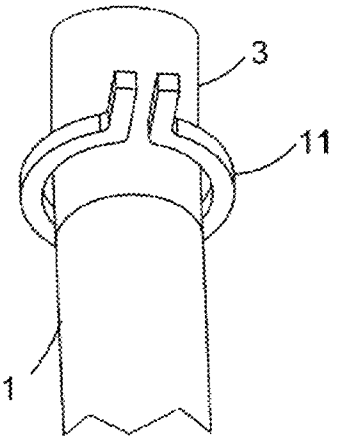

Fig. 7

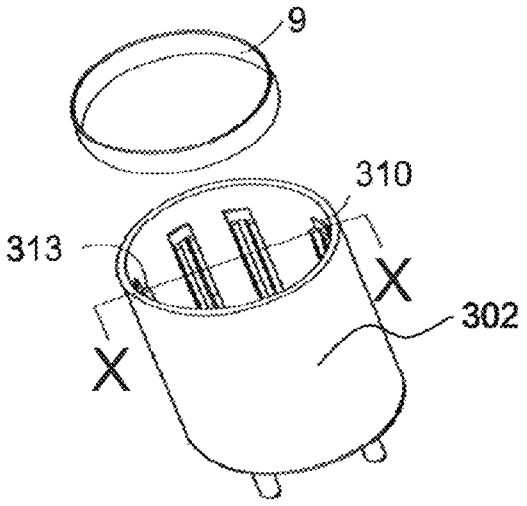

Fig. 8

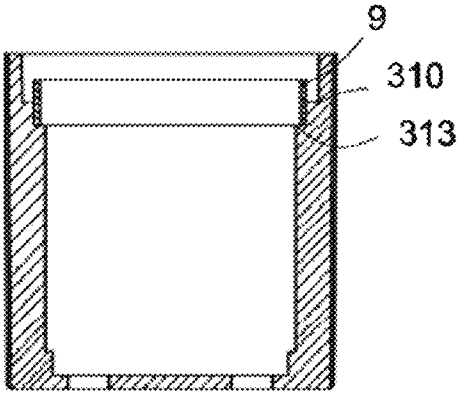

Fig. 9



Fig. 10



Fig. 11

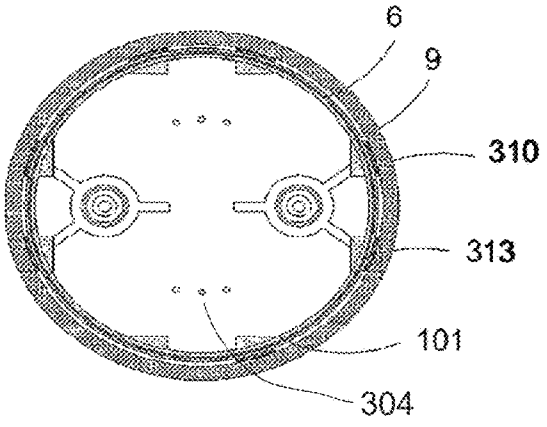

Fig. 12

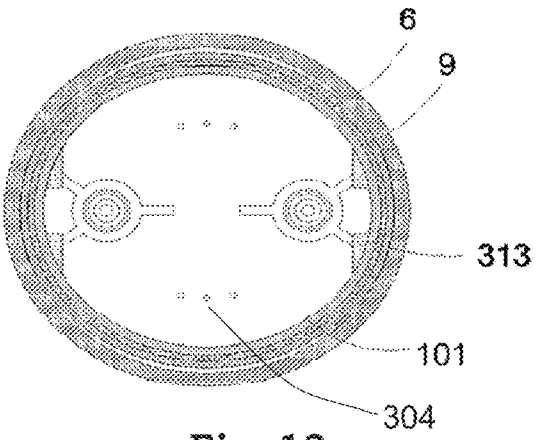

Fig. 13

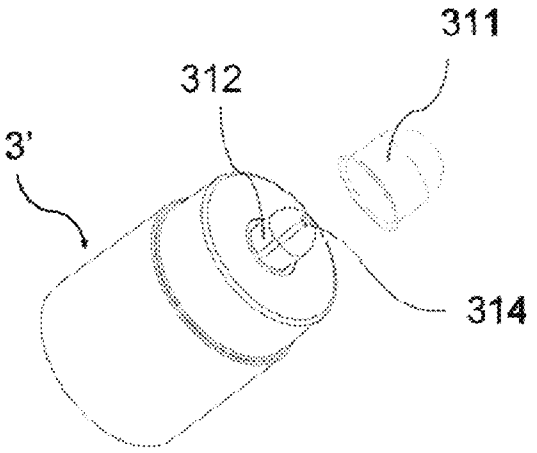

Fig. 14

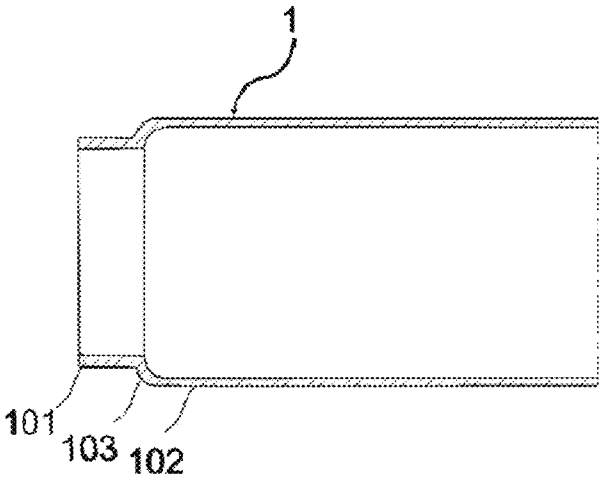

Fig. 15

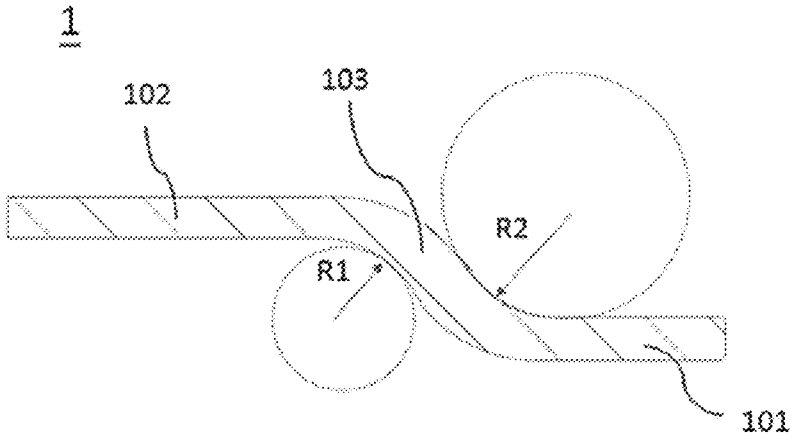

Fig. 16

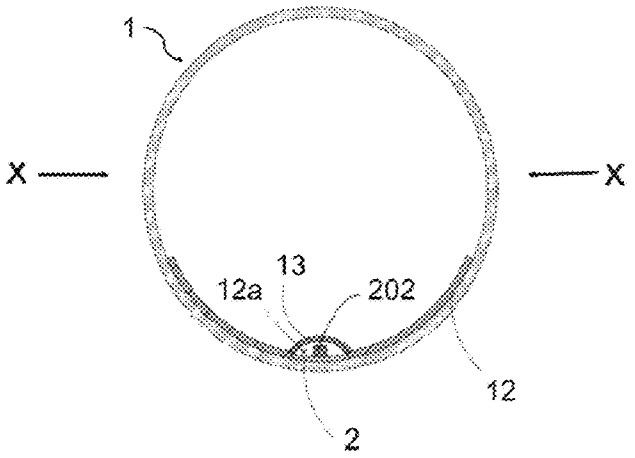

Fig. 17

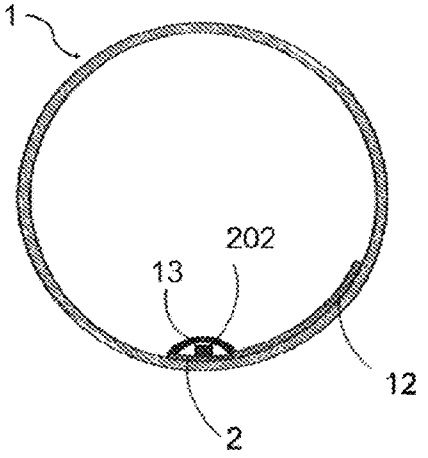

Fig. 18

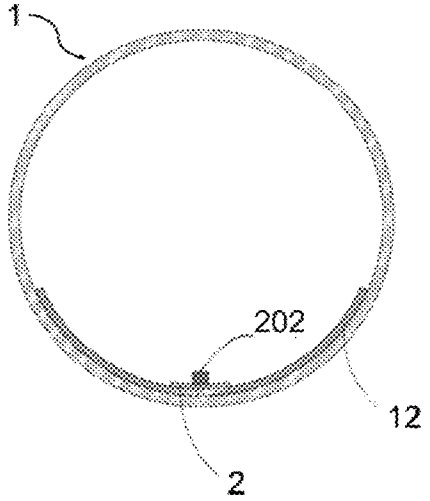

Fig. 19

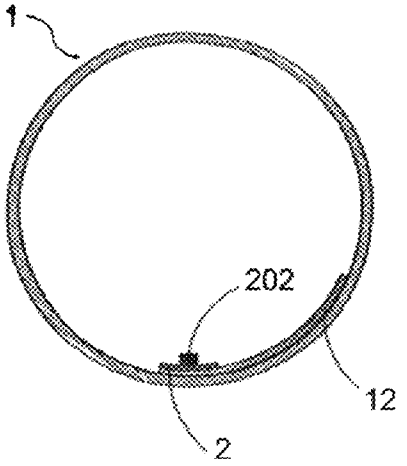

Fig. 20

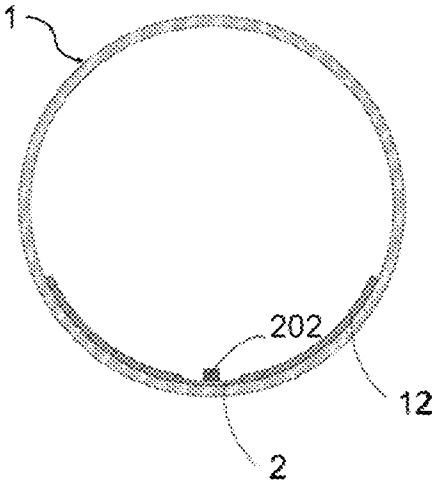

Fig. 21

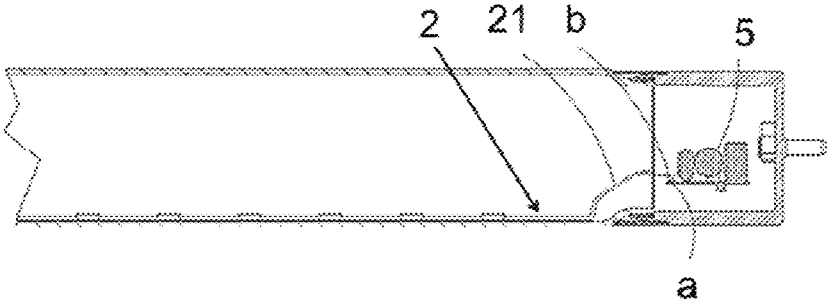

Fig. 22

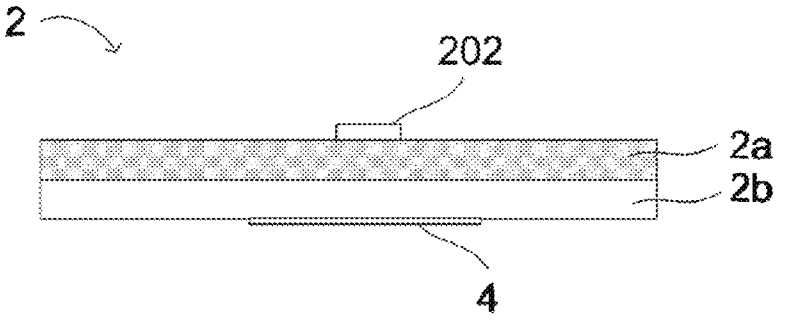

Fig. 23

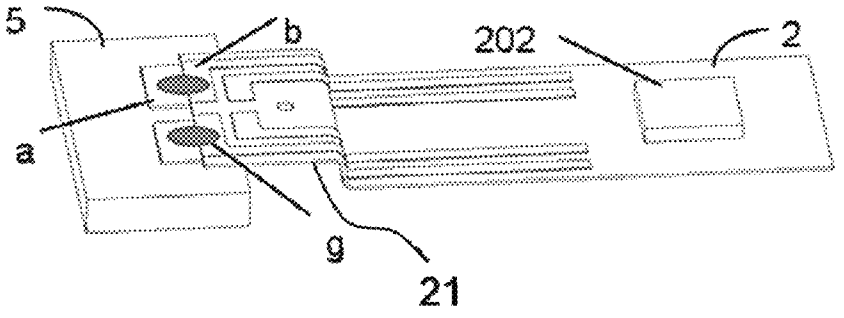

Fig. 24

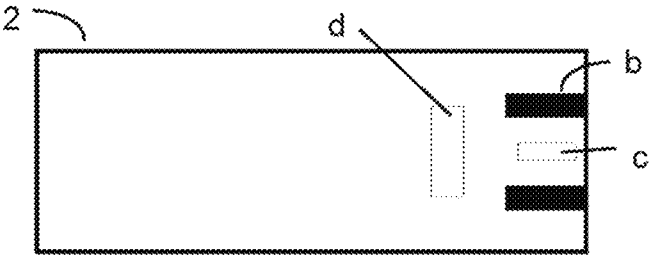

Fig. 25

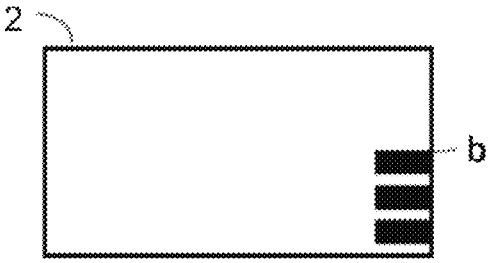

Fig. 26

Fig. 27

Fig. 28

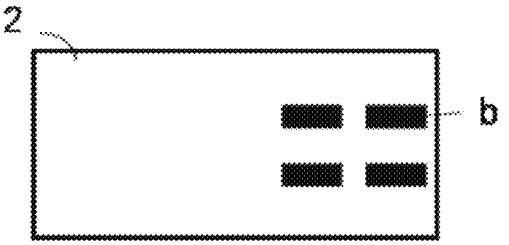

Fig. 29

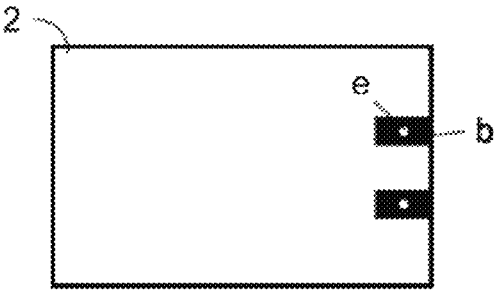

Fig. 30

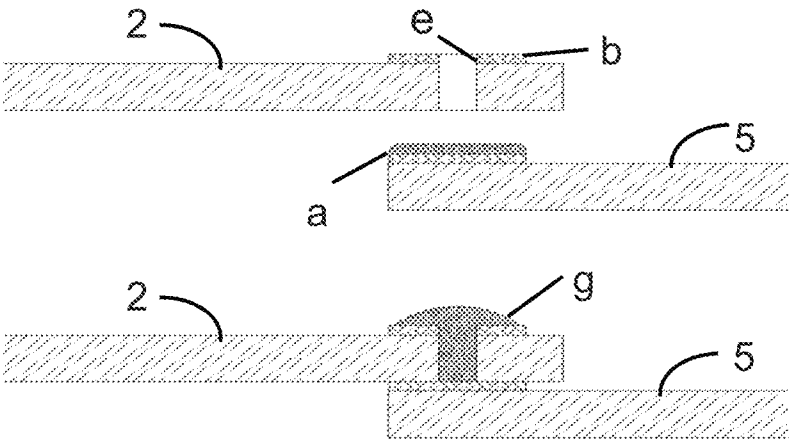

Fig. 31

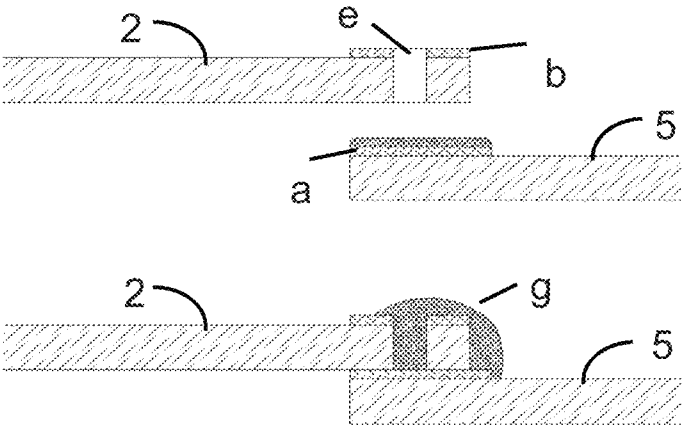

Fig. 32

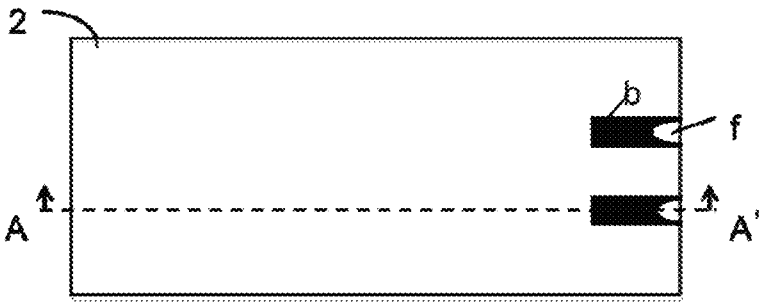

Fig. 33

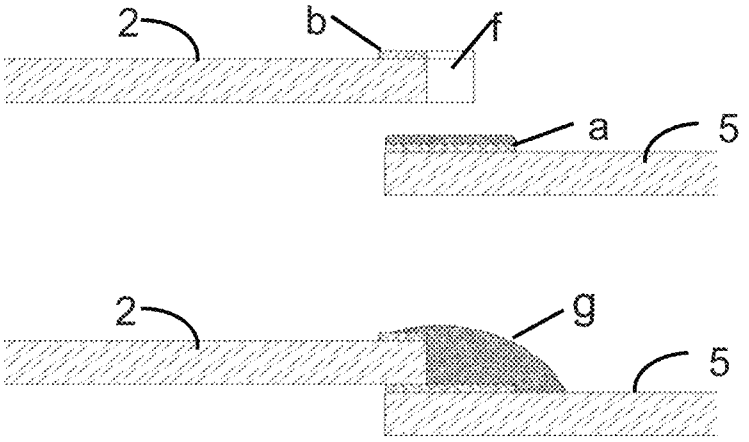

Fig. 34

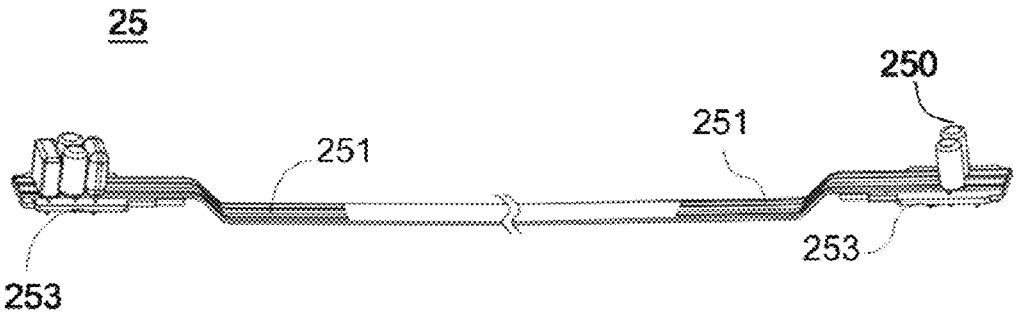

Fig. 35

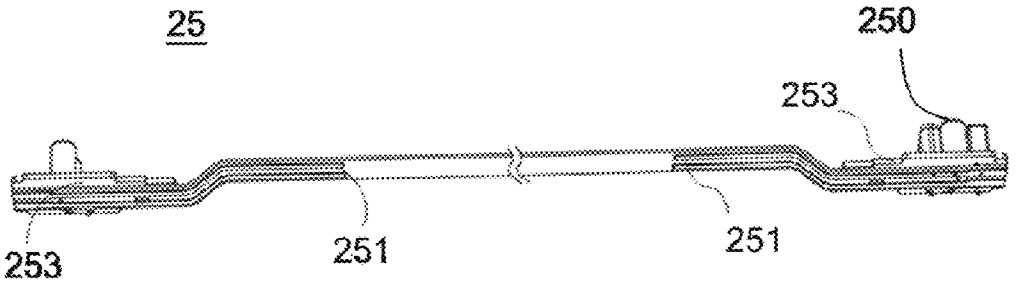

Fig. 36

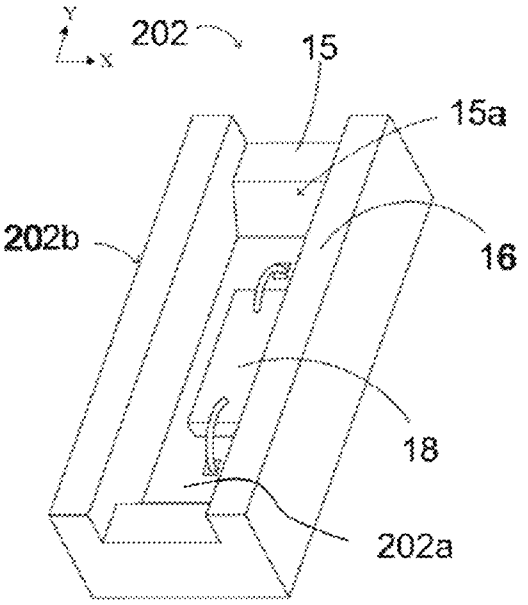

Fig. 37

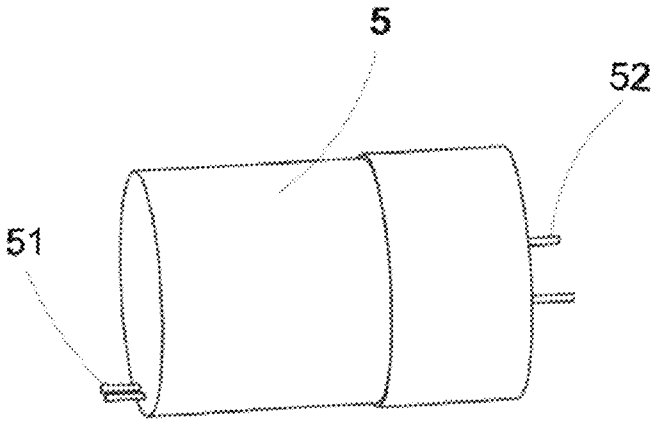

Fig. 38

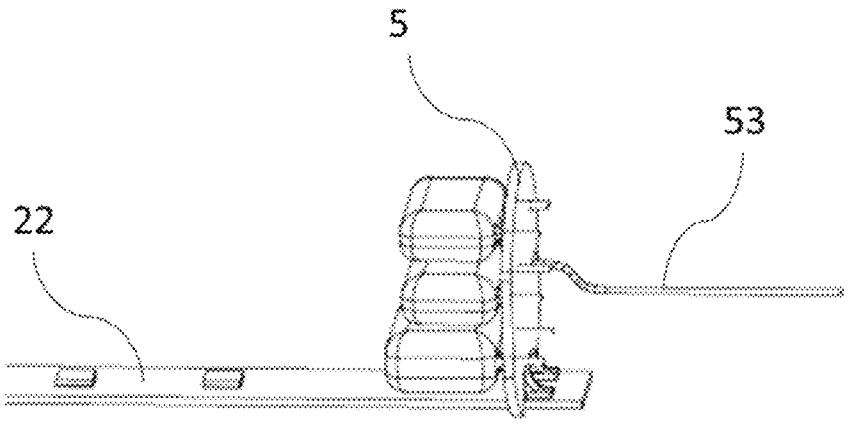

Fig. 39

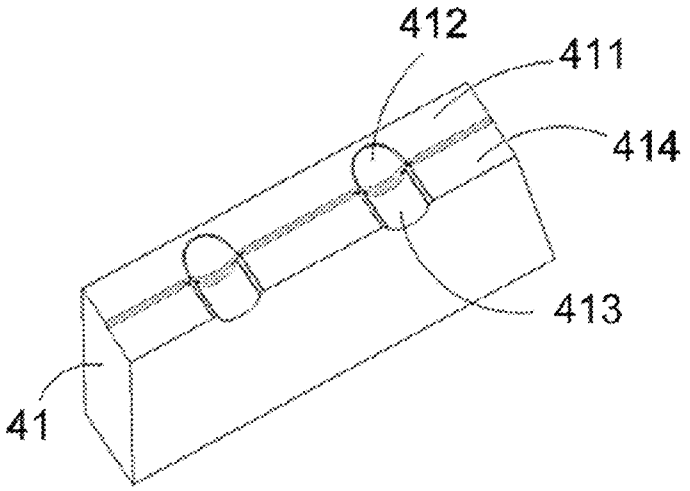

Fig. 40

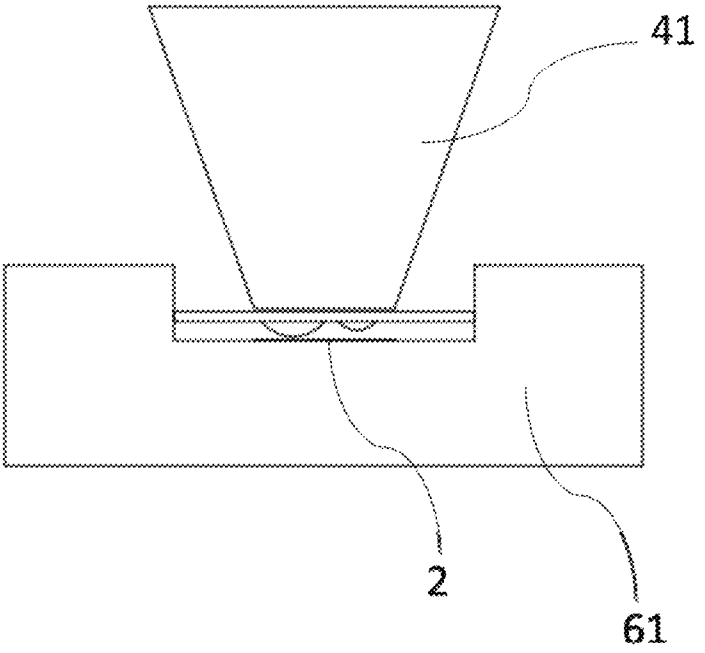

Fig. 41

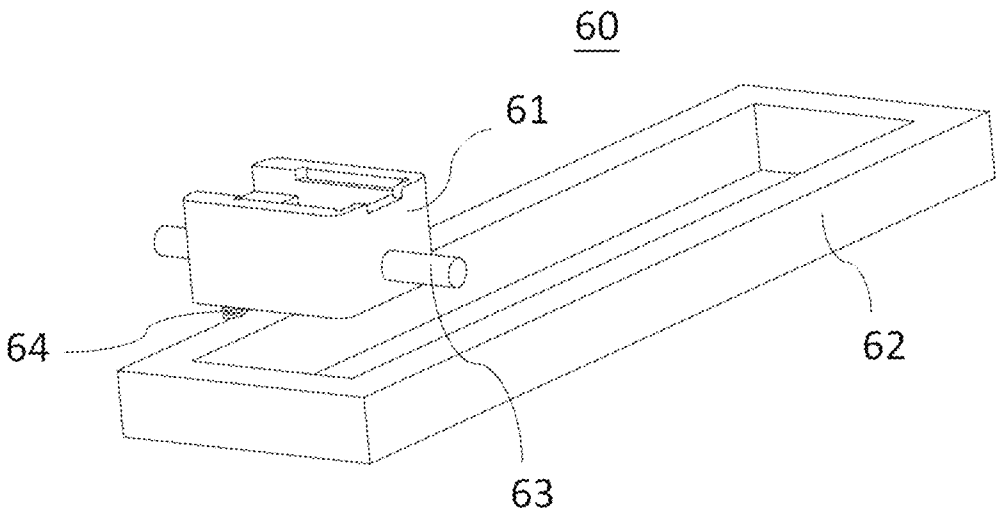

Fig. 42

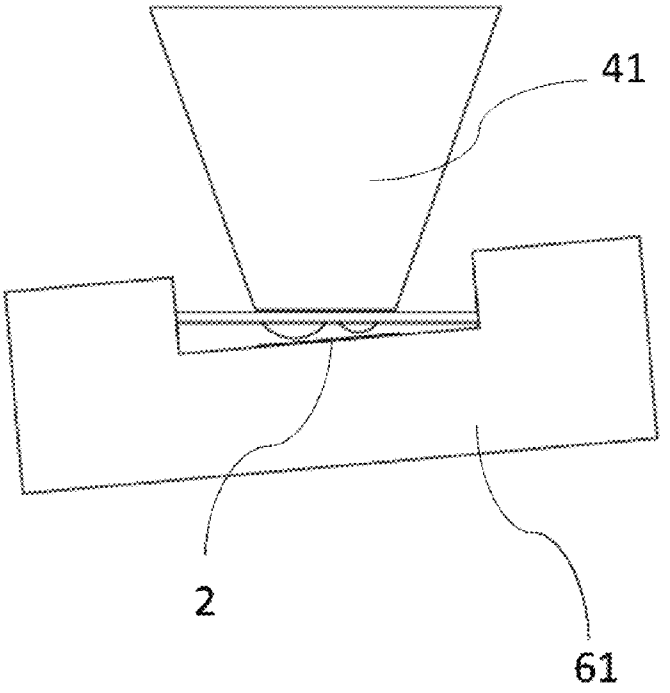

Fig. 43

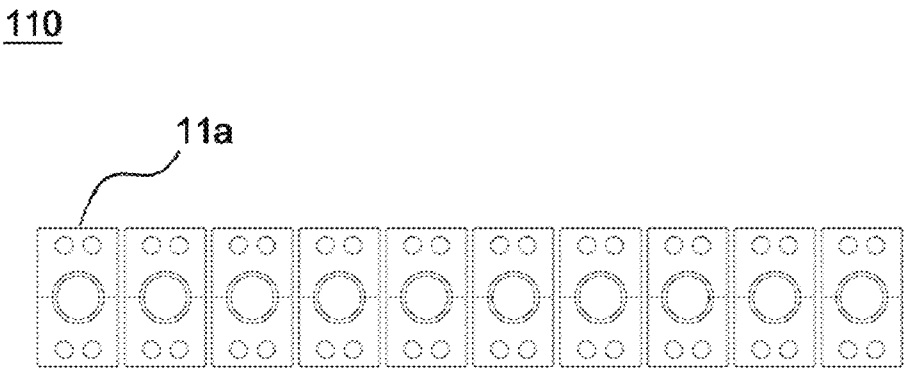

Fig. 44

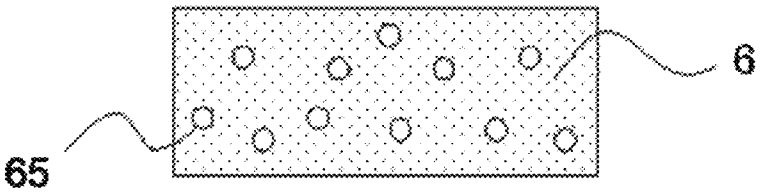

Fig. 45

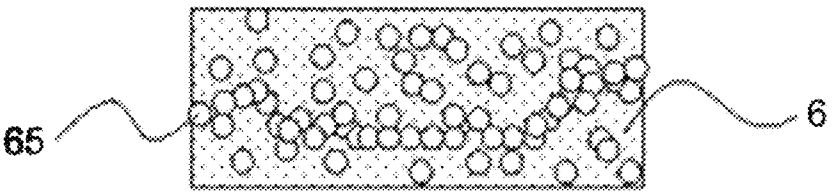

Fig. 46

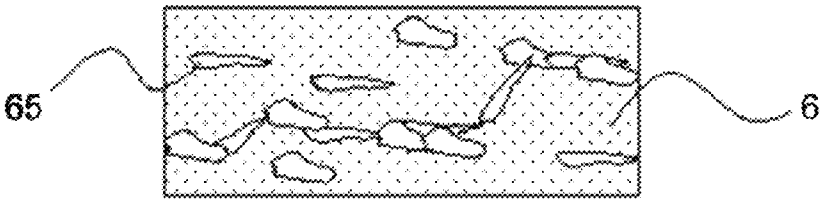

Fig. 47

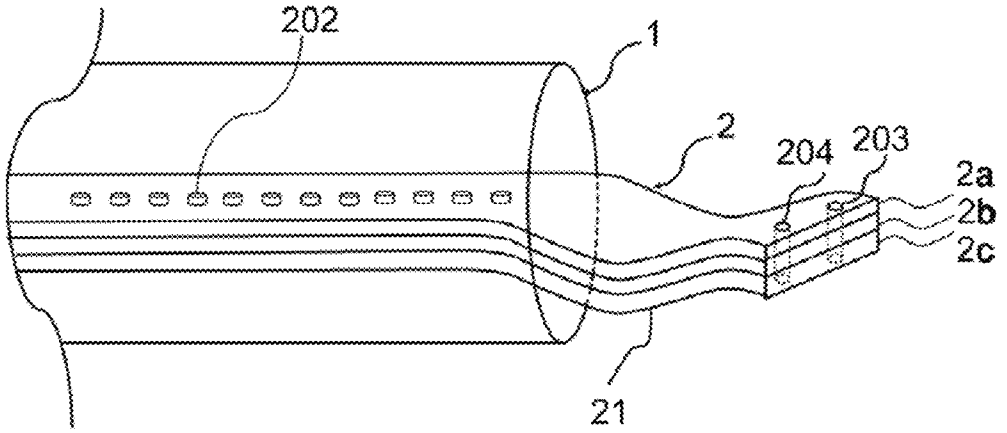

Fig. 48

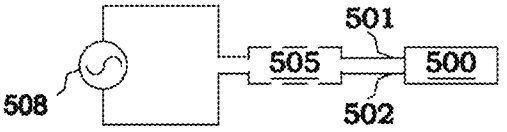

Fig. 49A

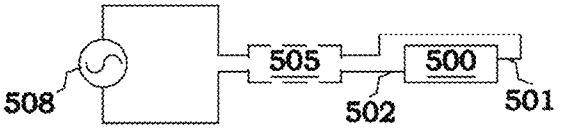

Fig. 49B

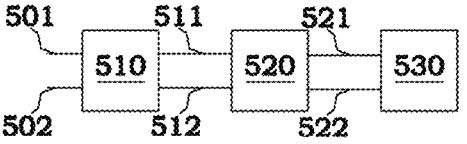

Fig. 49C

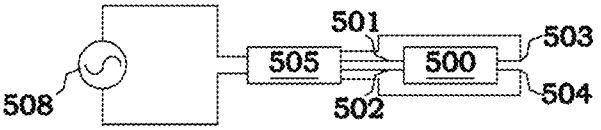

Fig. 49D

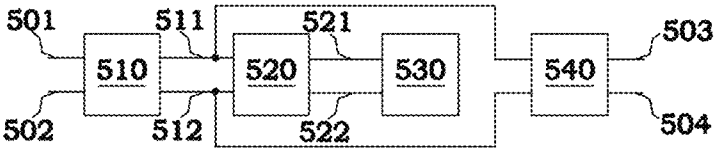

Fig. 49E

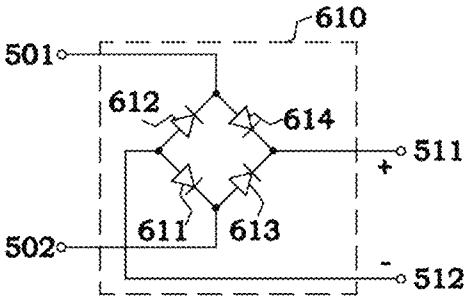

Fig. 50A

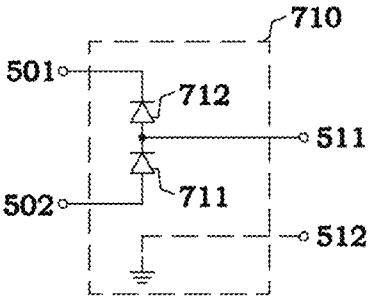

Fig. 50B

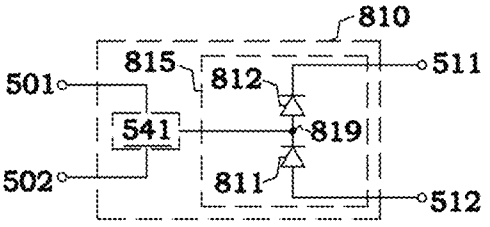

Fig. 50C

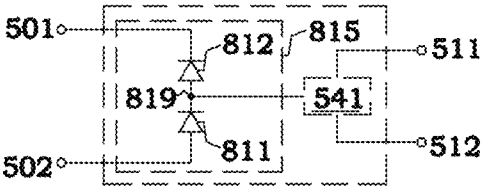

Fig. 50D

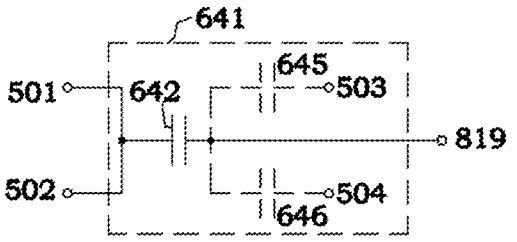

Fig. 51A

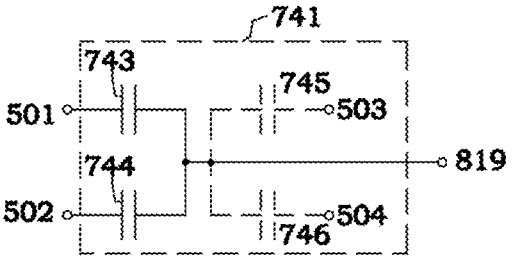

Fig. 51B

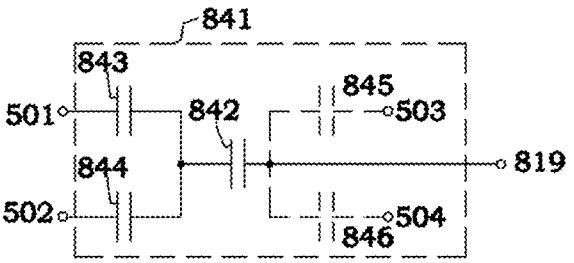

Fig. 51C

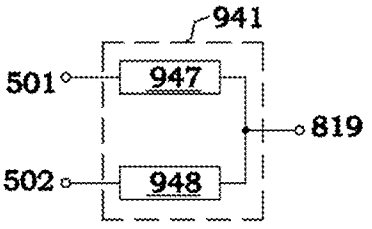

Fig. 51D

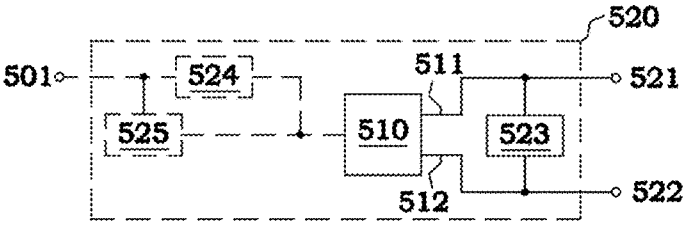

Fig. 52A



Fig. 52B

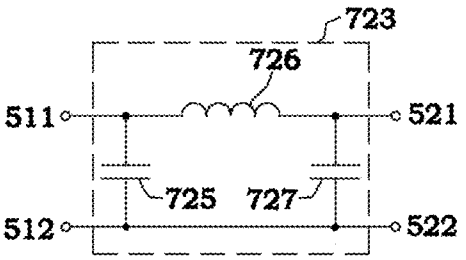

Fig. 52C

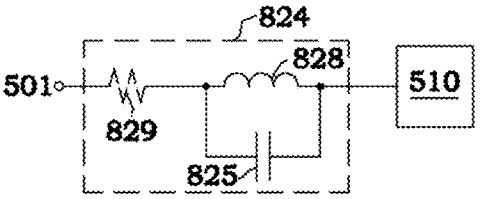

Fig. 52D

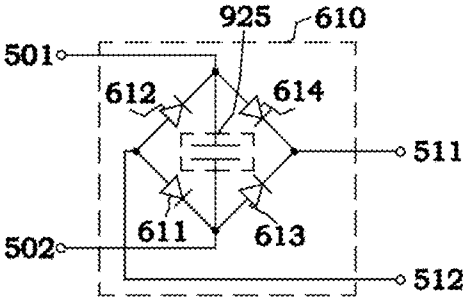

Fig. 52E

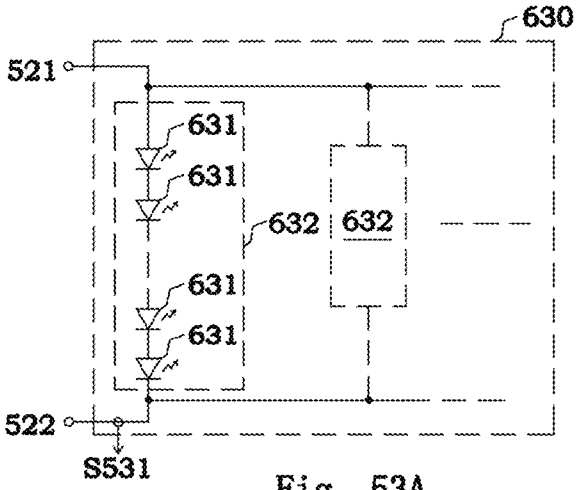

Fig. 53A

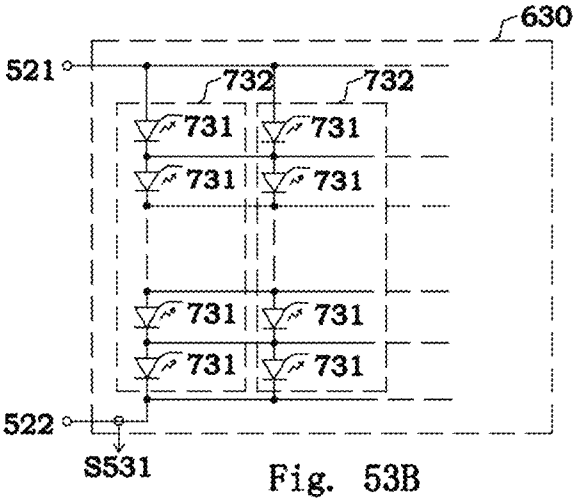

Fig. 53B

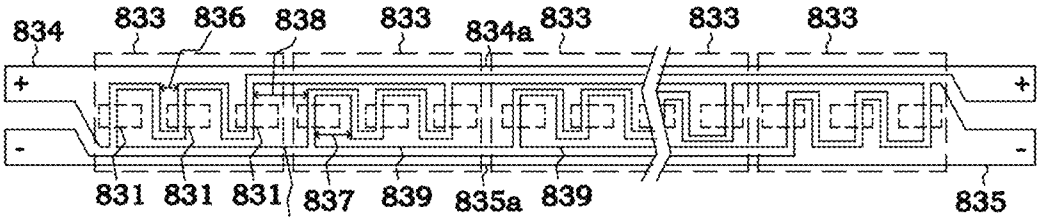

Fig. 53C

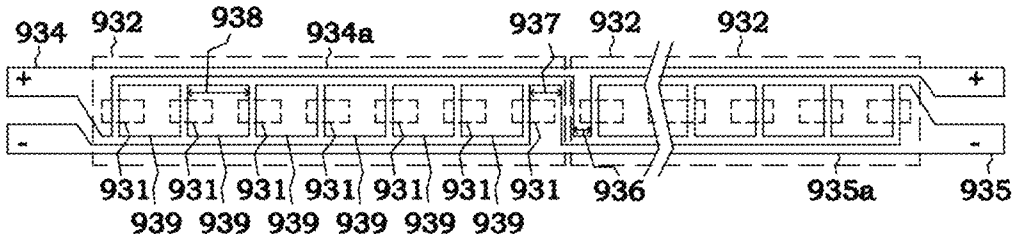

Fig. 53D

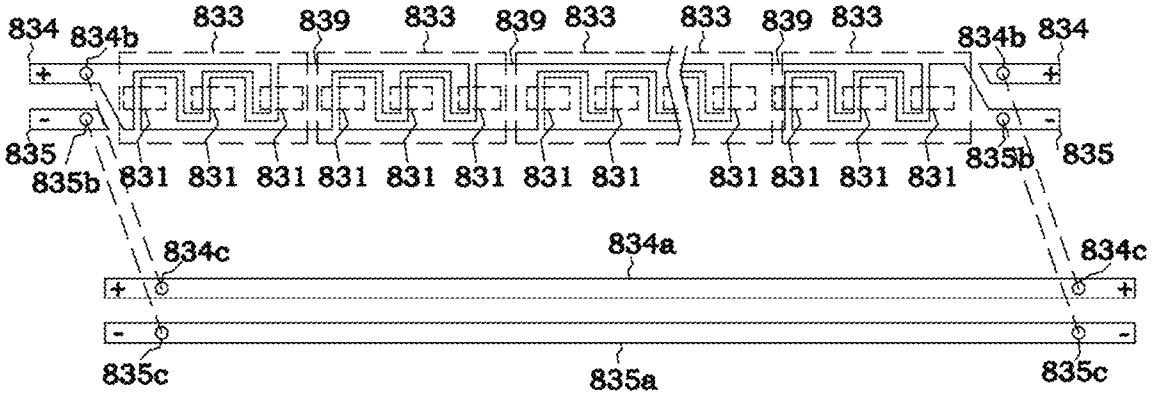

Fig. 53E

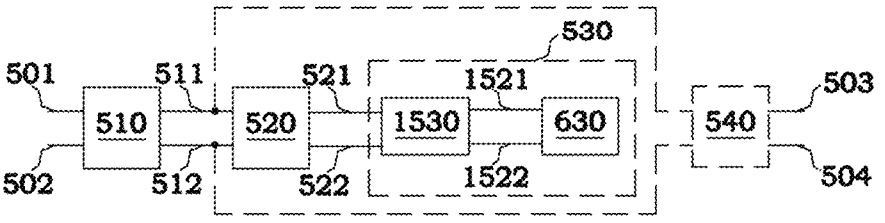

Fig. 54A

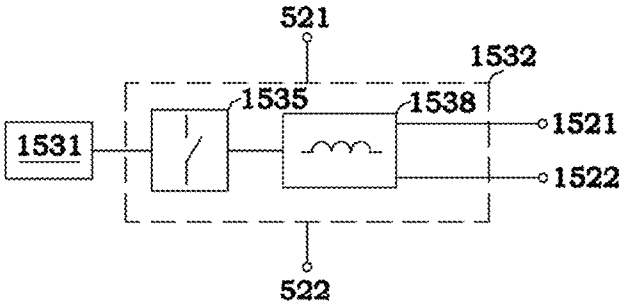

Fig. 54B

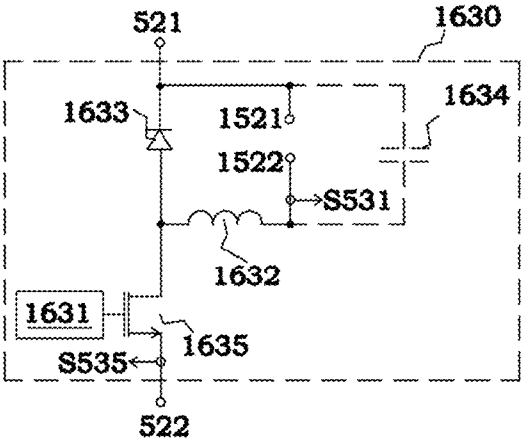

Fig. 54C

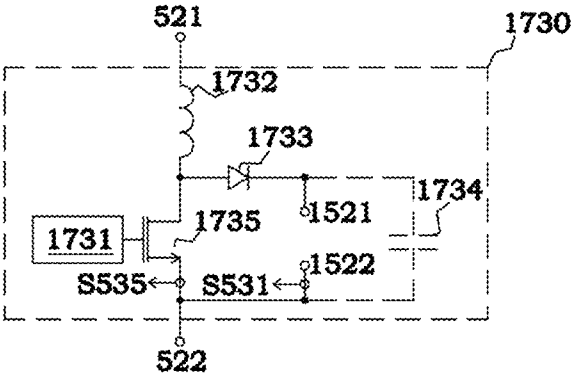

Fig. 54D

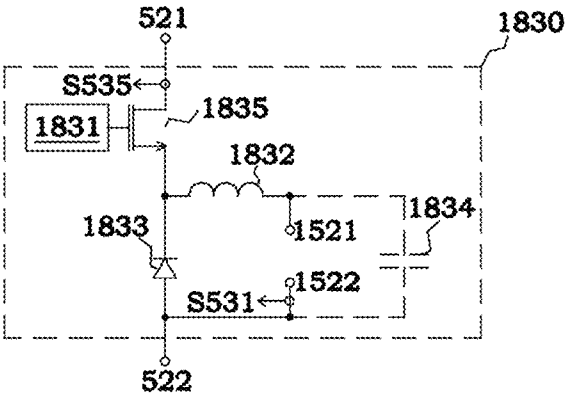

Fig. 54E

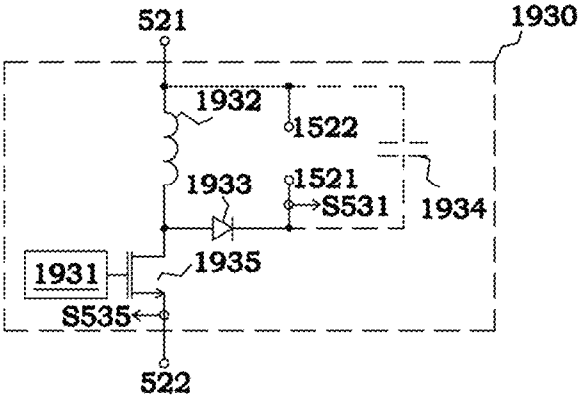

Fig. 54F

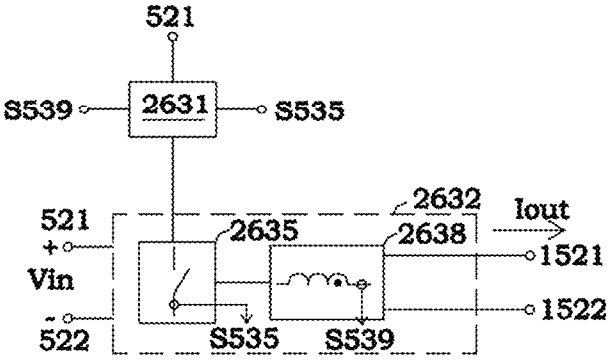

Fig. 54G

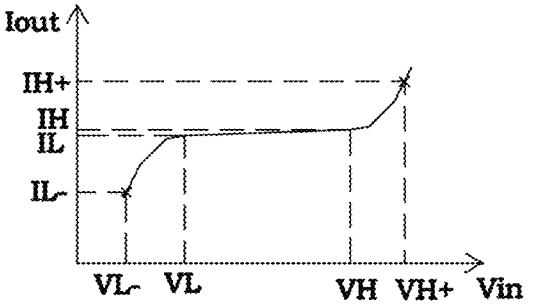

Fig. 54H

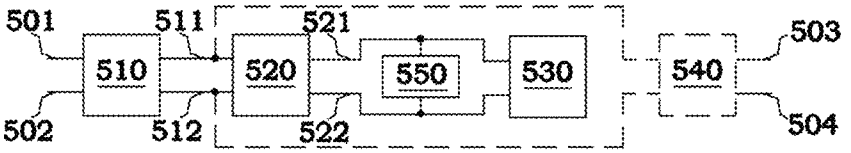

Fig. 55A



Fig. 55B

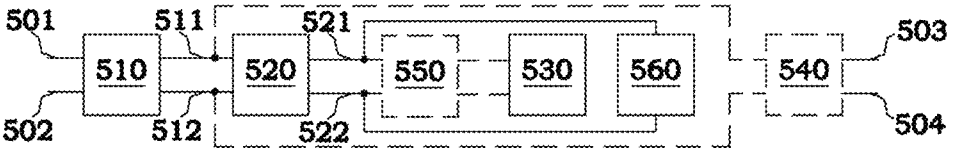

Fig. 56A

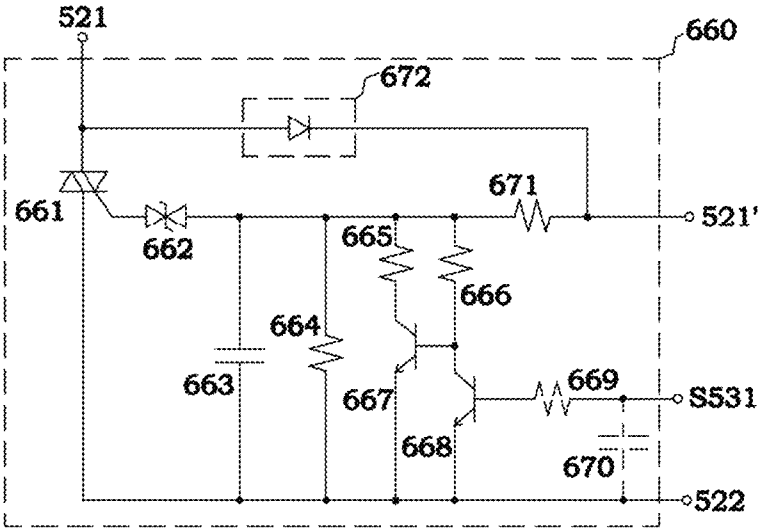

Fig. 56B

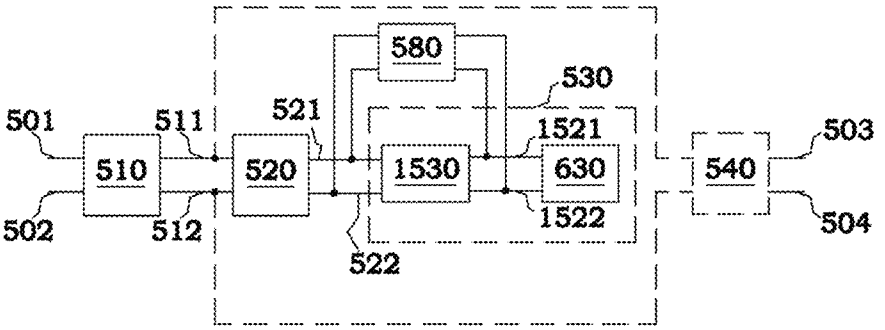

Fig. 57A

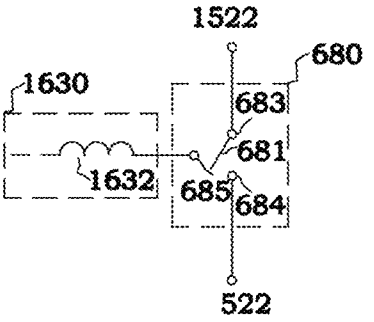

Fig. 57B

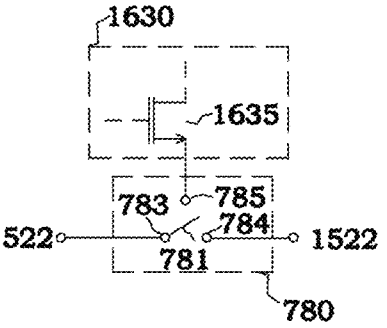

Fig. 57C

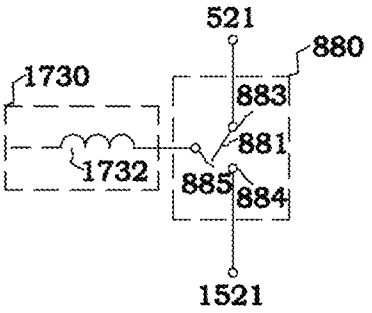

Fig. 57D

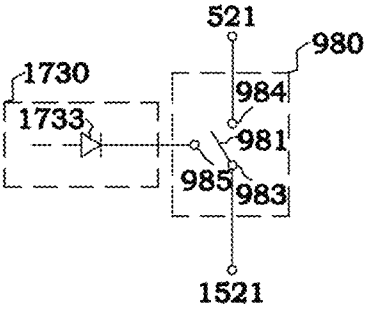

Fig. 57E

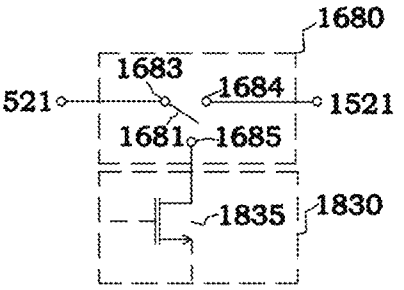

Fig. 57F

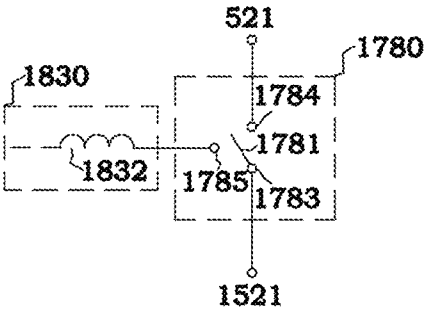

Fig. 57G

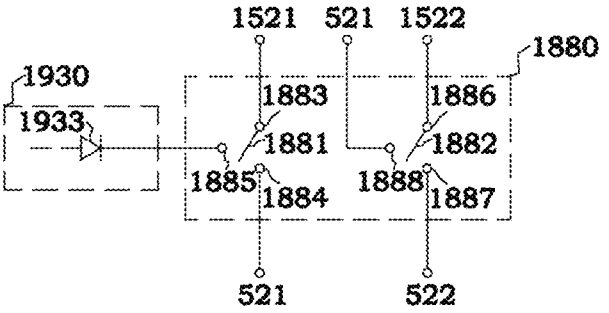

Fig. 57H

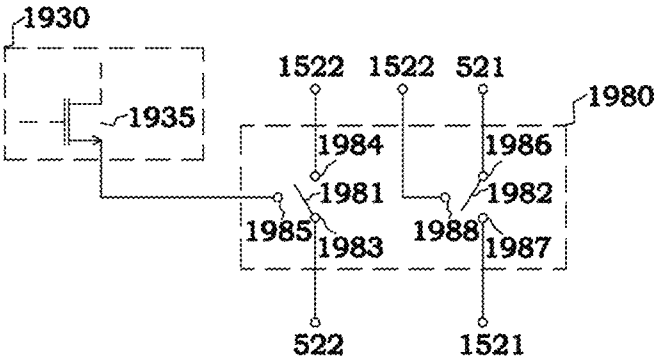

Fig. 57I

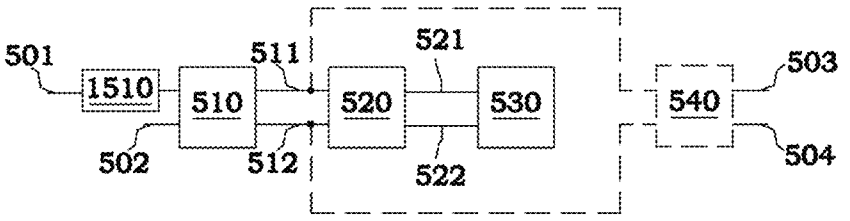

Fig. 58A

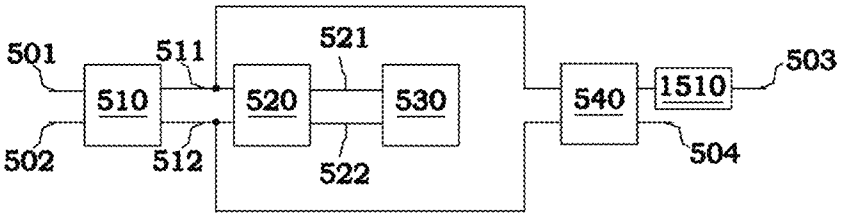

Fig. 58B

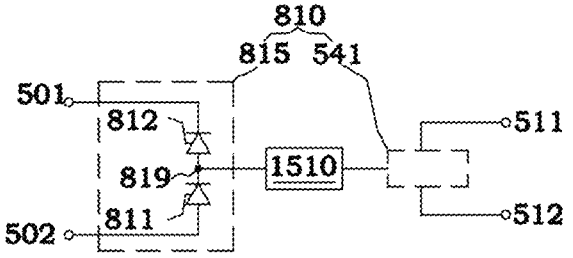

Fig. 58C

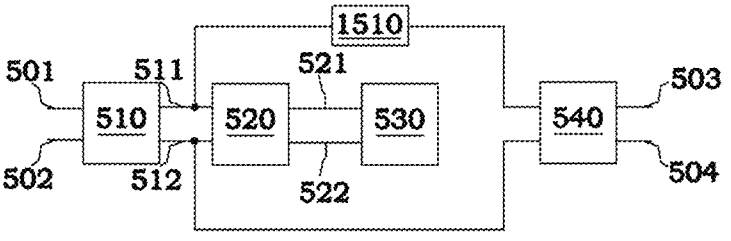

Fig. 58D

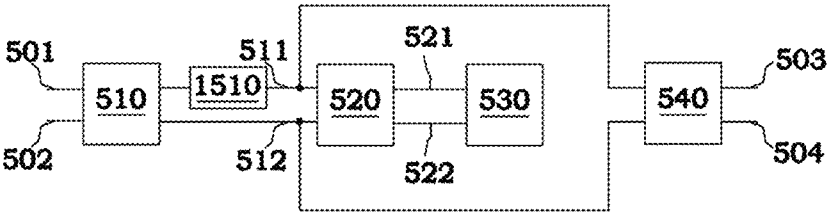

Fig. 58E

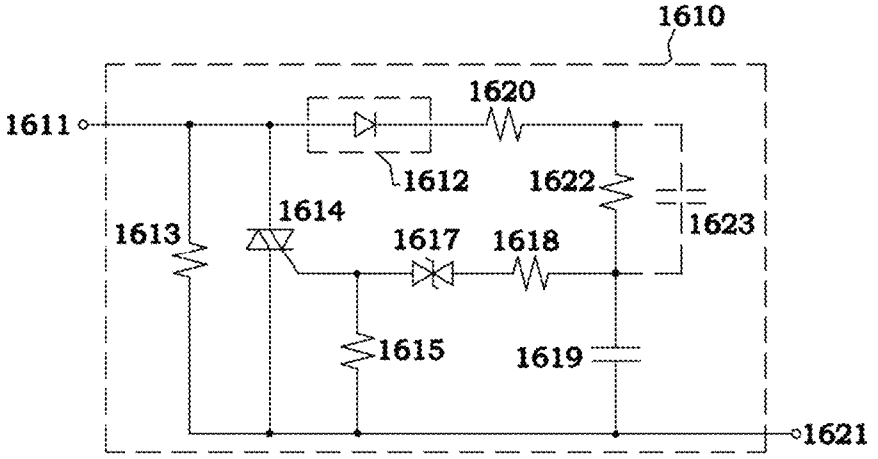

Fig. 58F

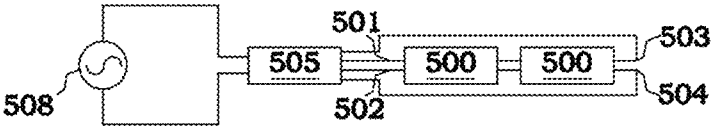

Fig. 58G

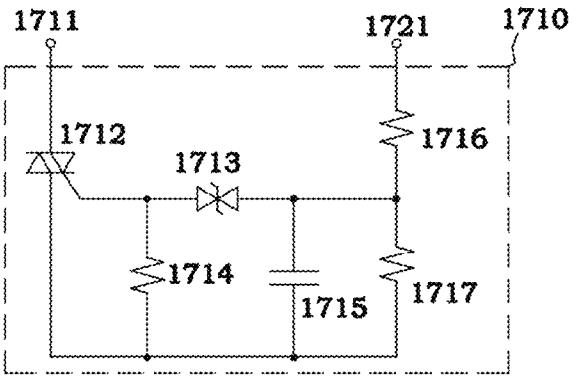

Fig. 58H

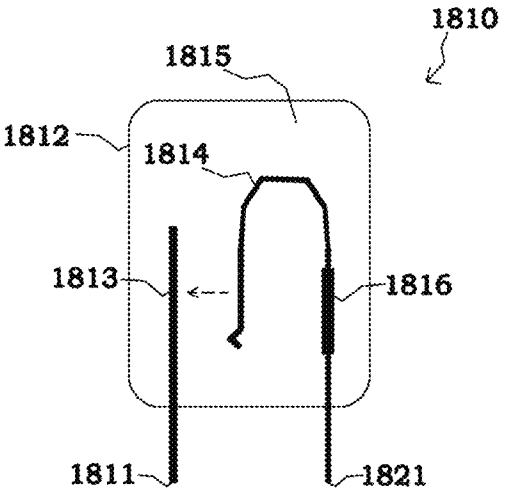

Fig. 58I

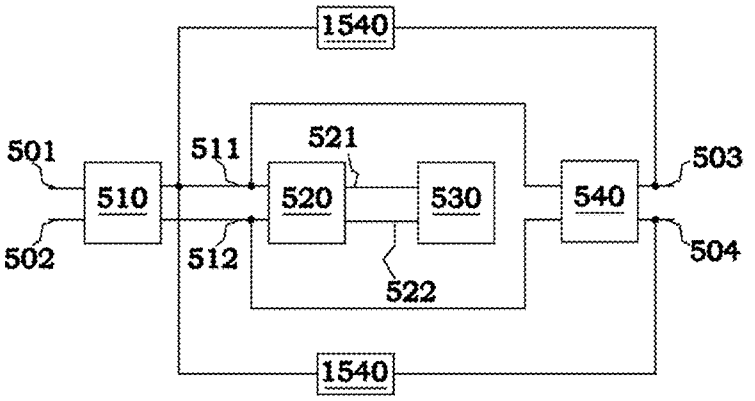

Fig. 59A

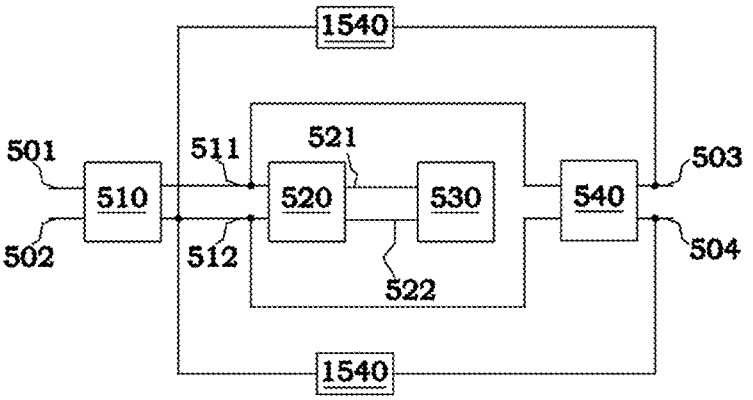

Fig. 59B

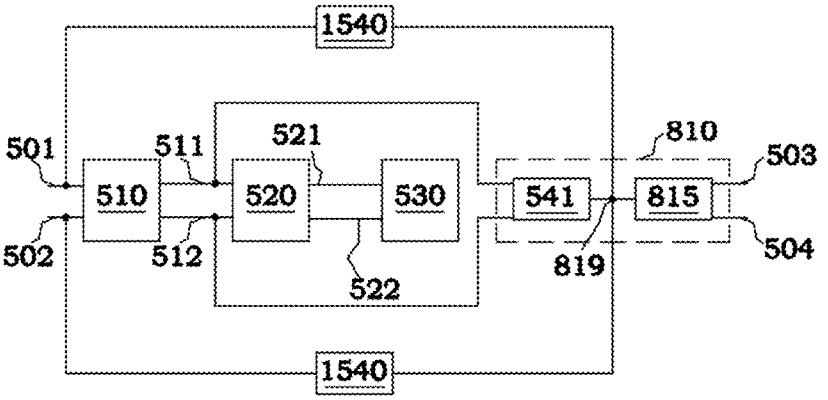

Fig. 59C

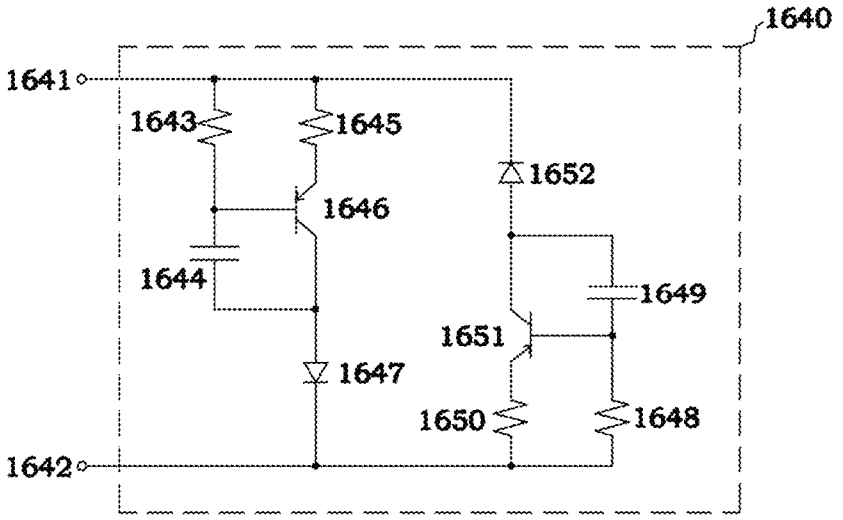

Fig. 59D

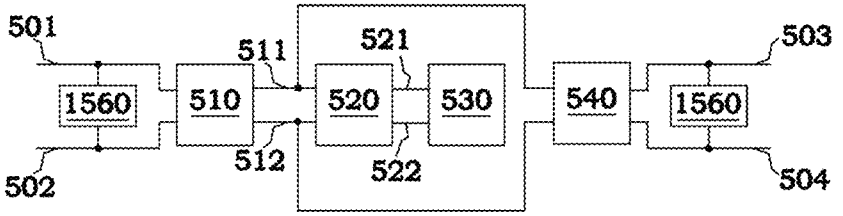

Fig. 60A

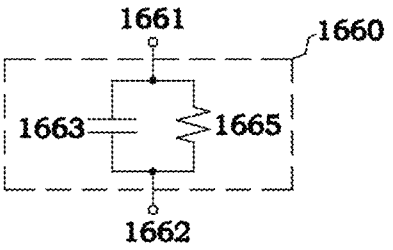

Fig. 60B

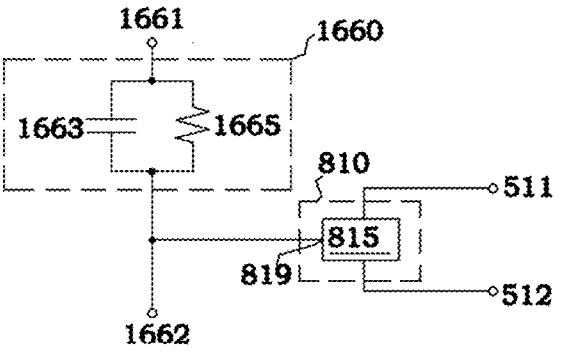

Fig. 60C

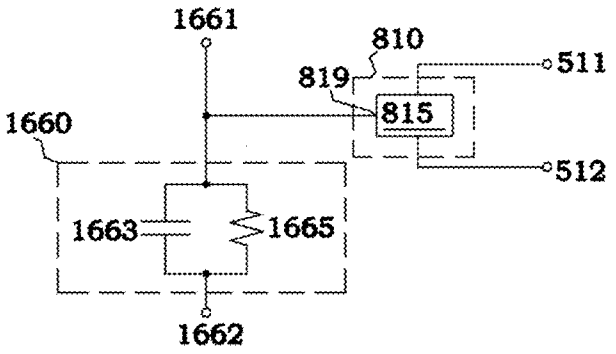

Fig. 60D

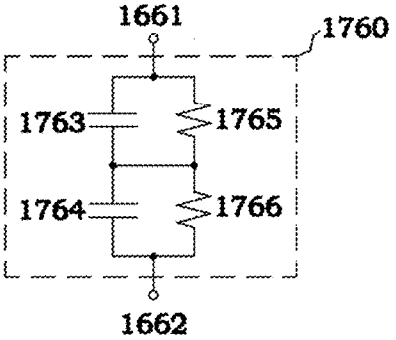

Fig. 60E

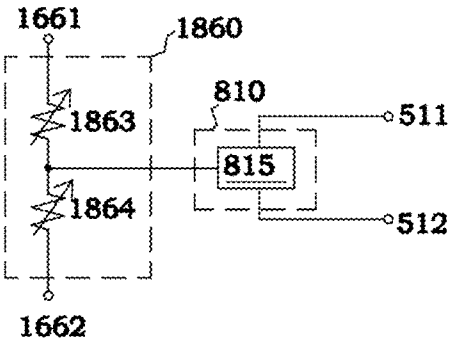

Fig. 60F

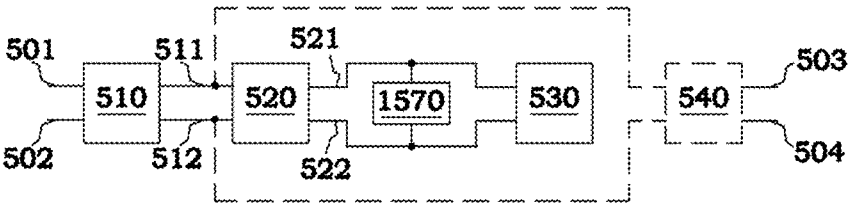

Fig. 61A



Fig. 61B

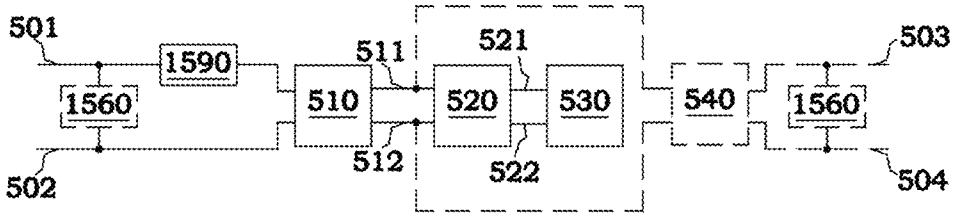

Fig. 62A

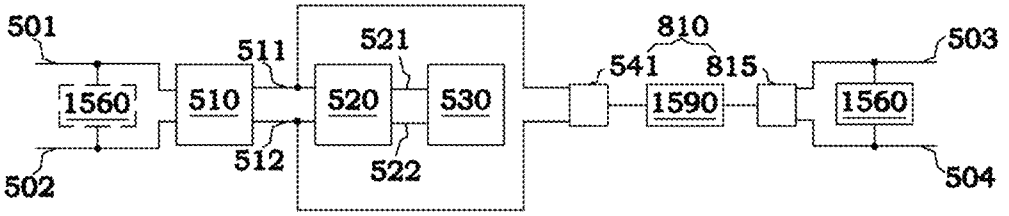

Fig. 62B

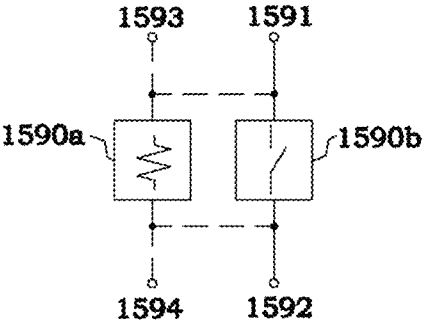

Fig. 62C

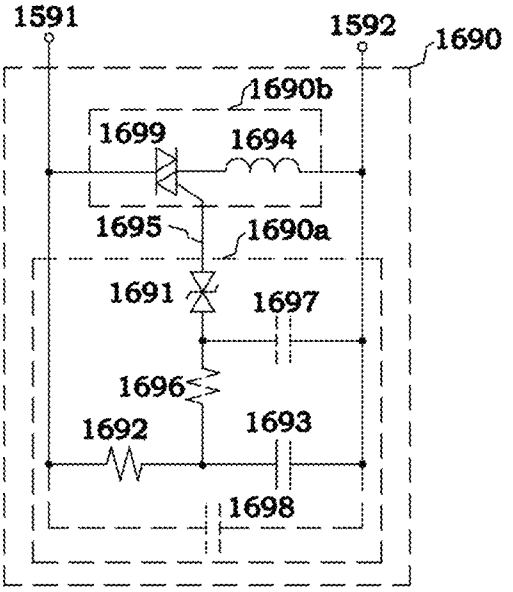

Fig. 62D

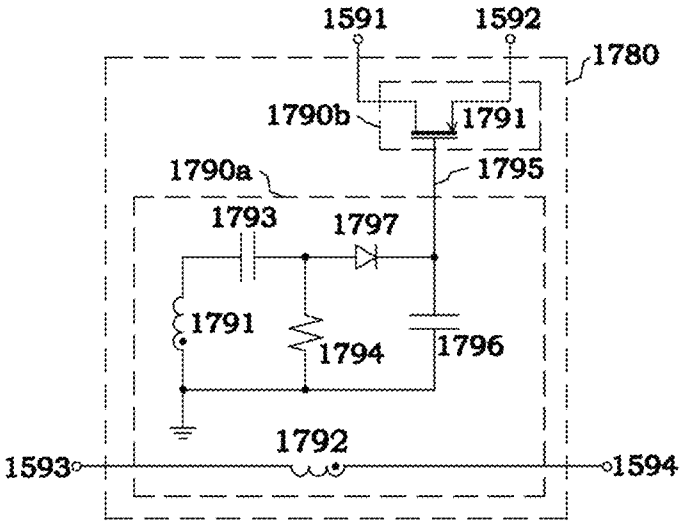

Fig. 62E

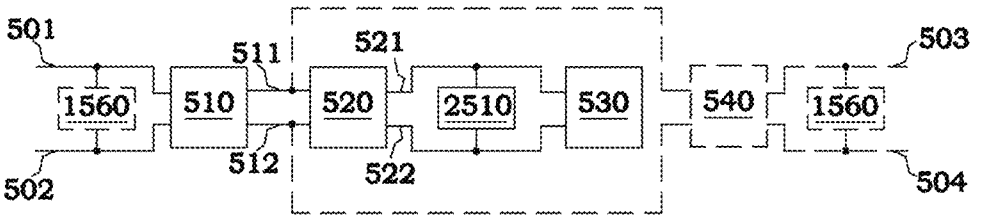

Fig. 63A

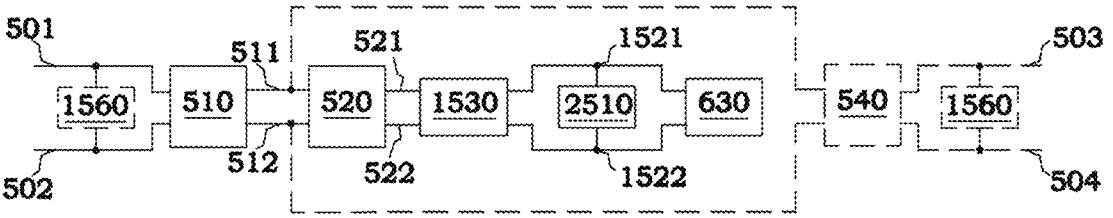

Fig. 63B

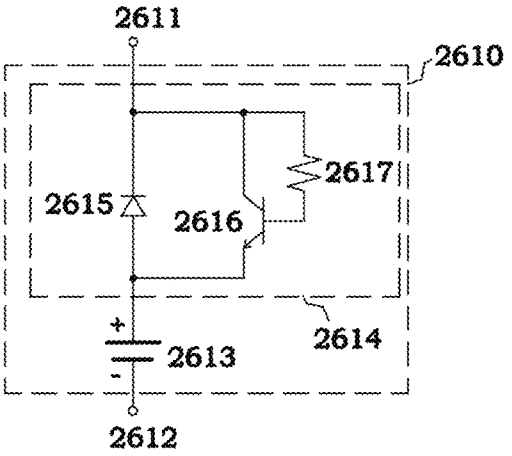

Fig. 63C

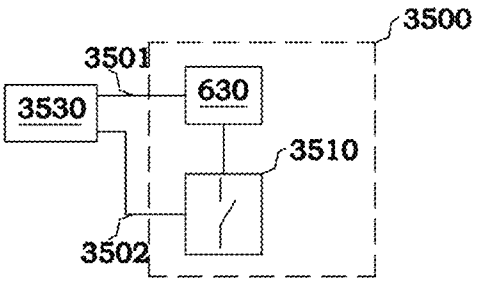

Fig. 64

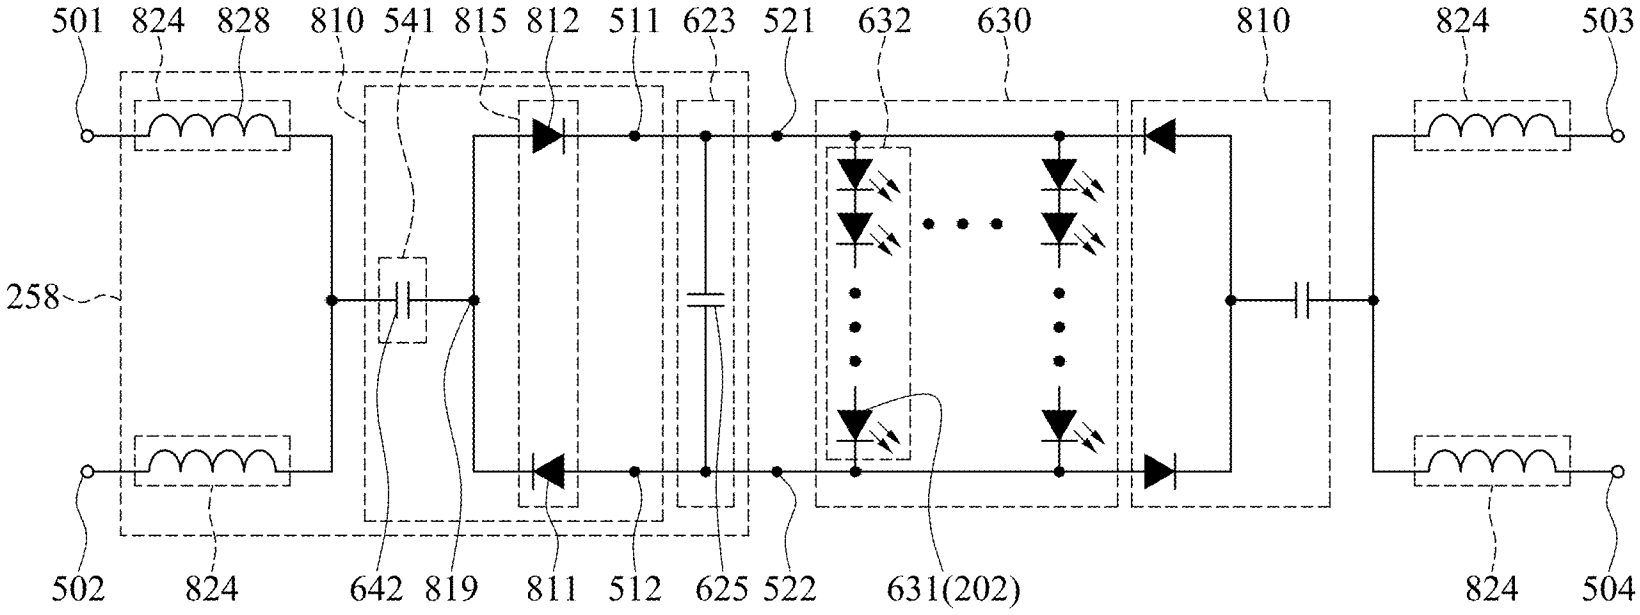
501
824
828
810
541
815
812
511
623
521
632
630
810
824
503
258
502
824
642
819
811
512
625
522
631(202)
824
504

Fig. 65

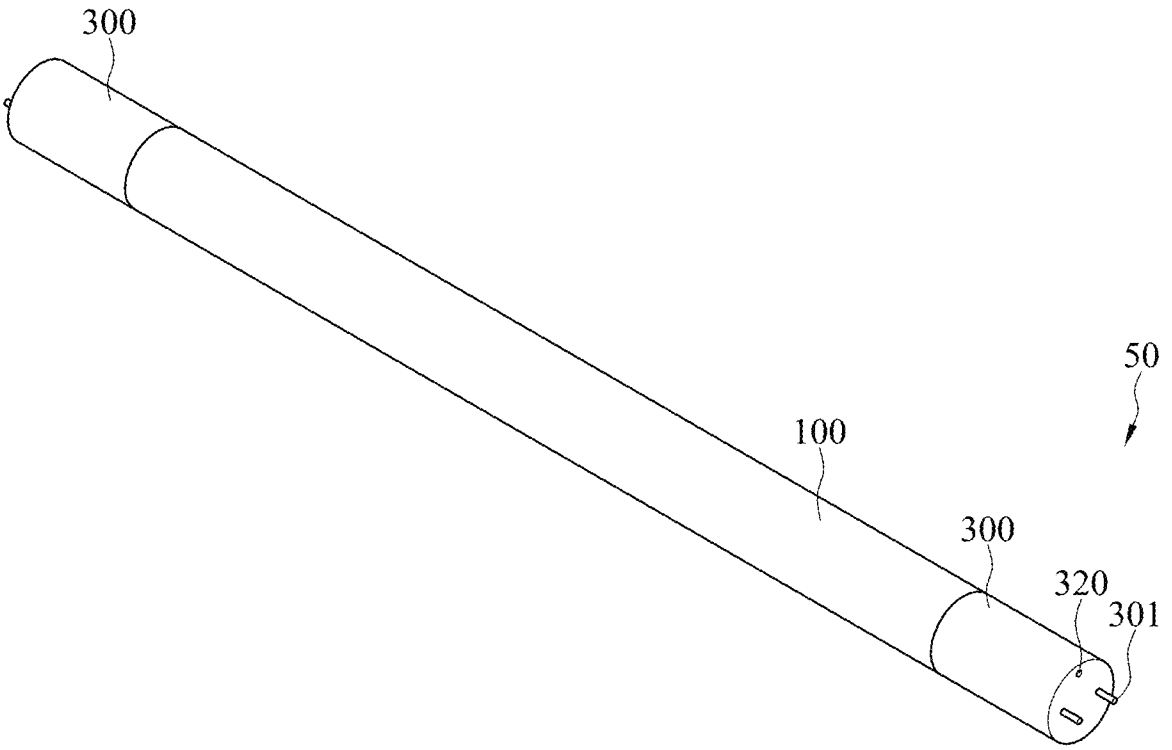

FIG.66

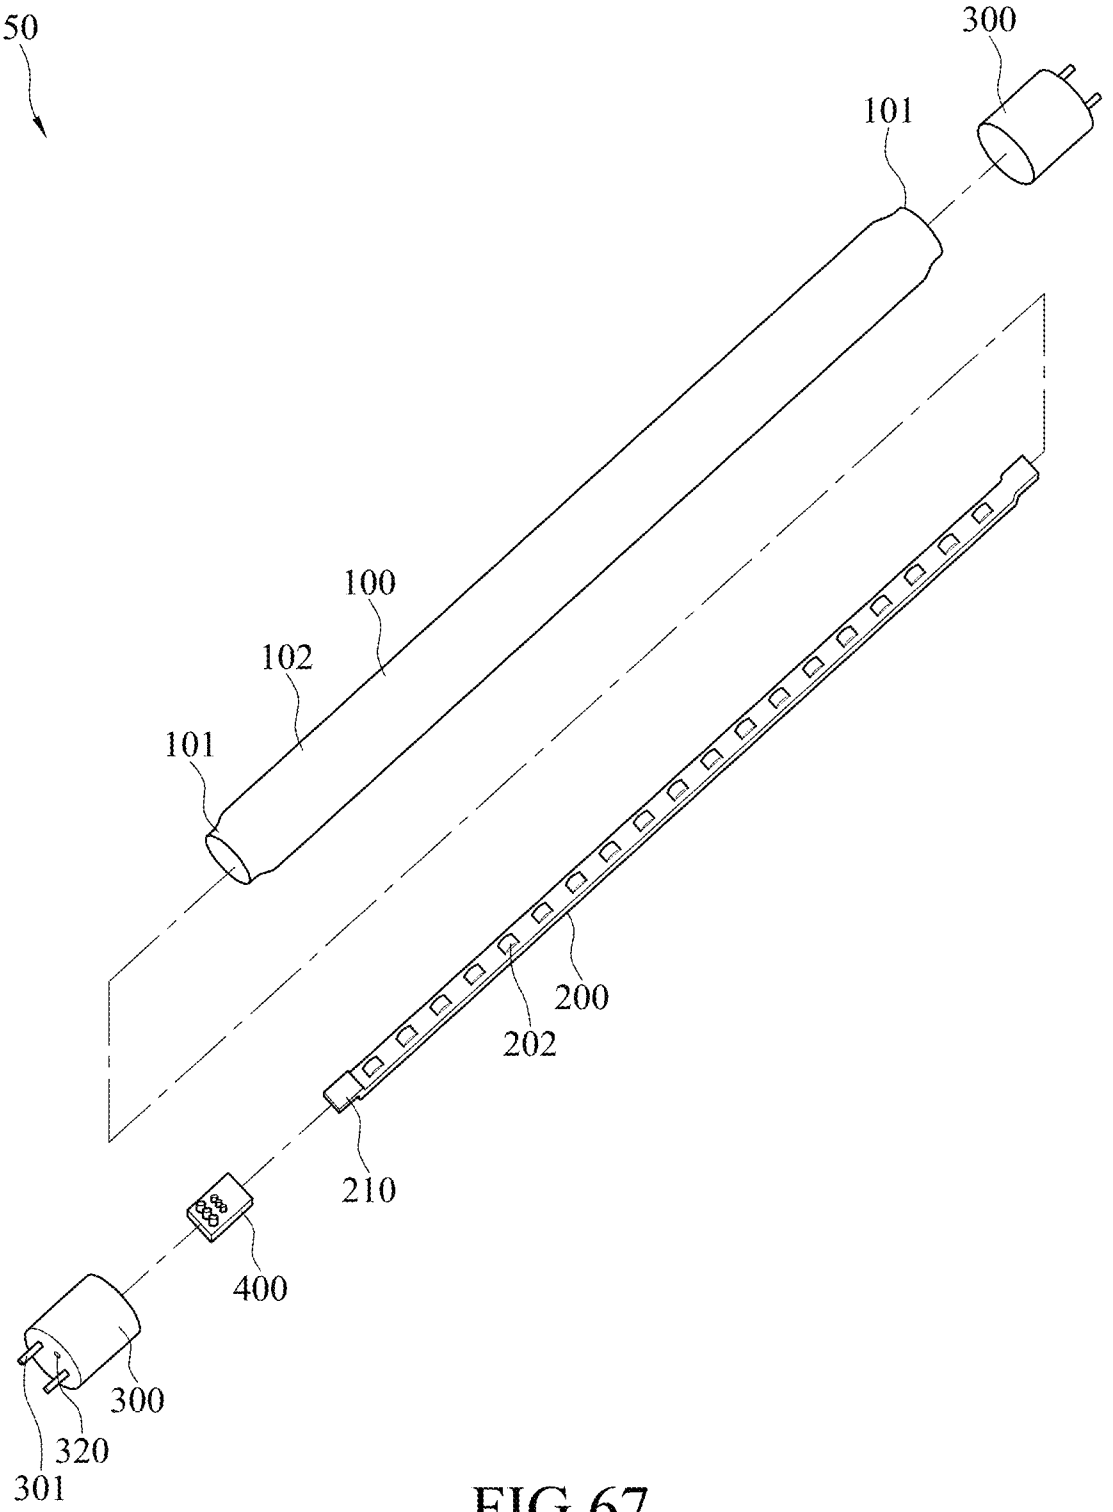

FIG.67

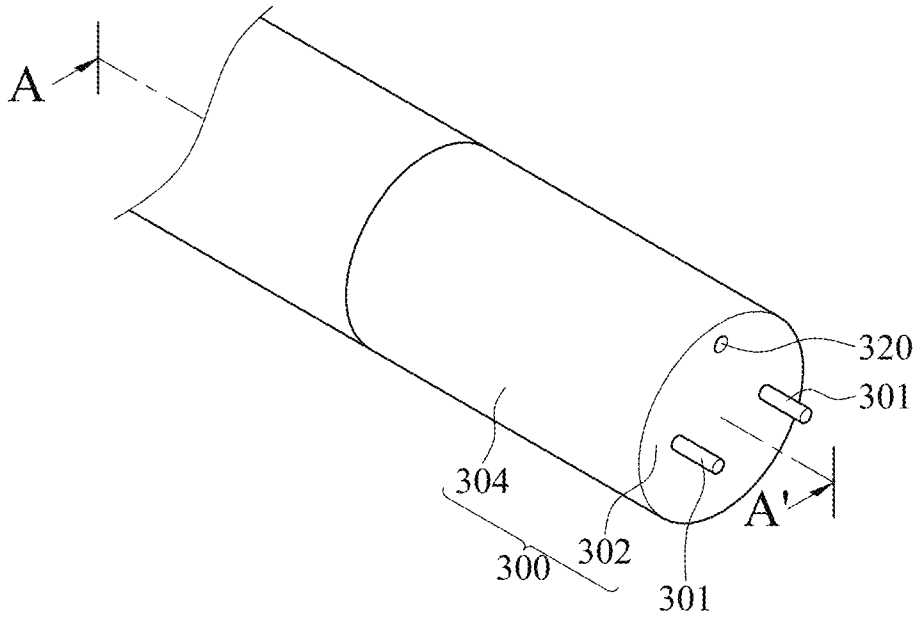

FIG.68

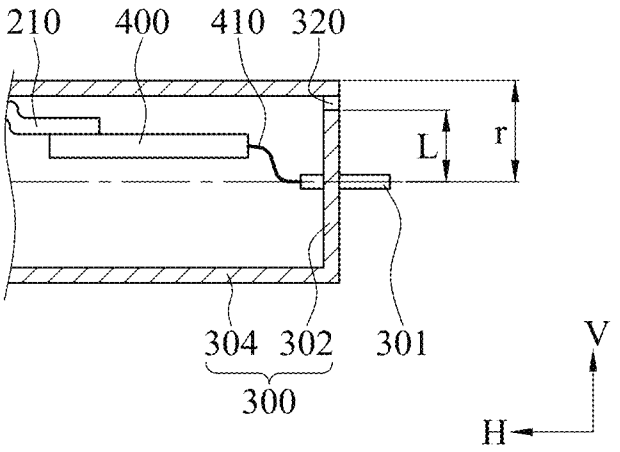

FIG.69

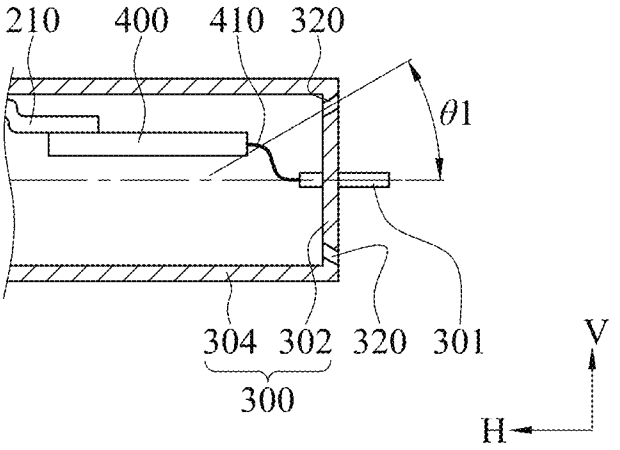
210
400
410
320
θ1
304
302
320
301
300
V
H

FIG.70

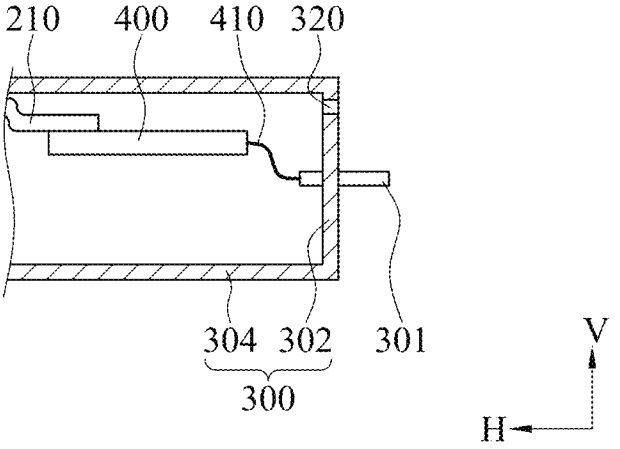
210
400
410
320
304
302
301
300
V
H

FIG.71

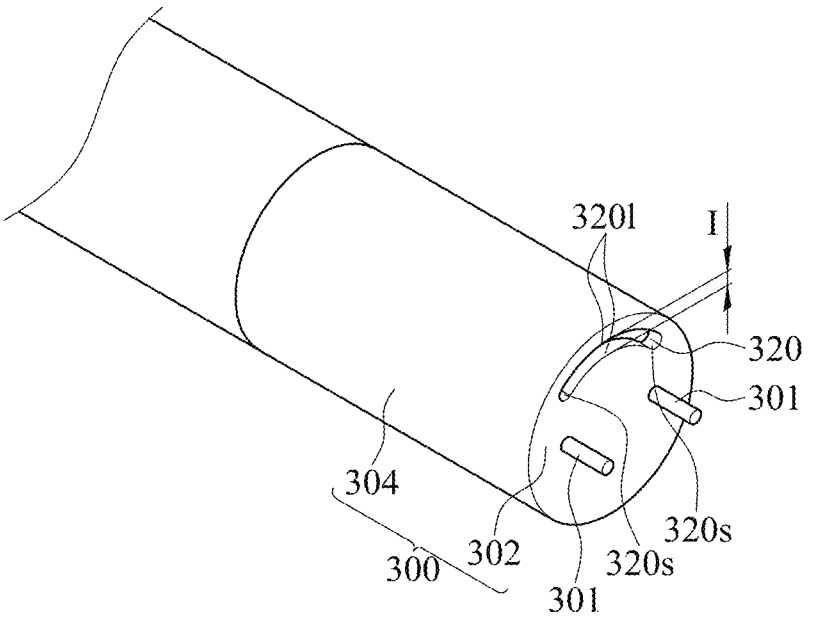
320l
I
320
301
304
320s
302
320s
300
301

FIG.72

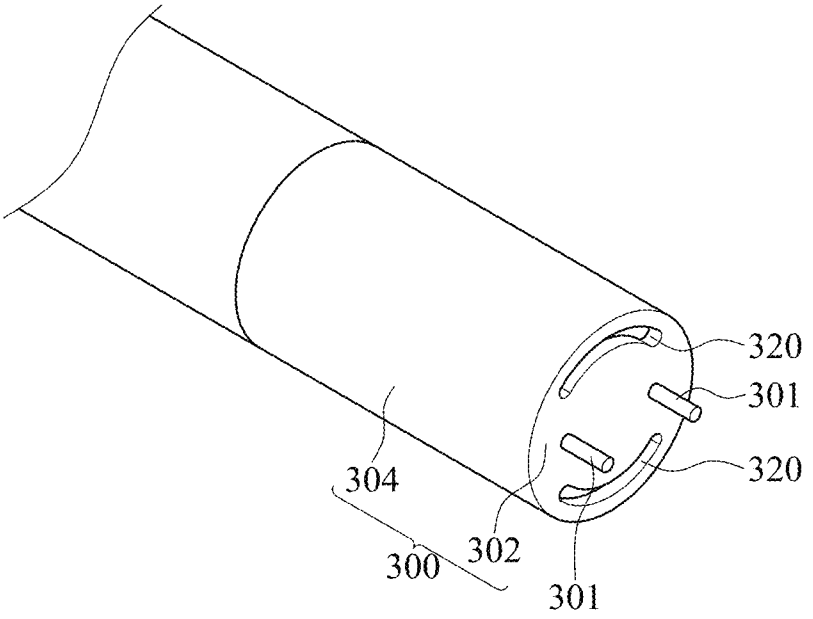
320
301
320
304
302
300
301

FIG.73

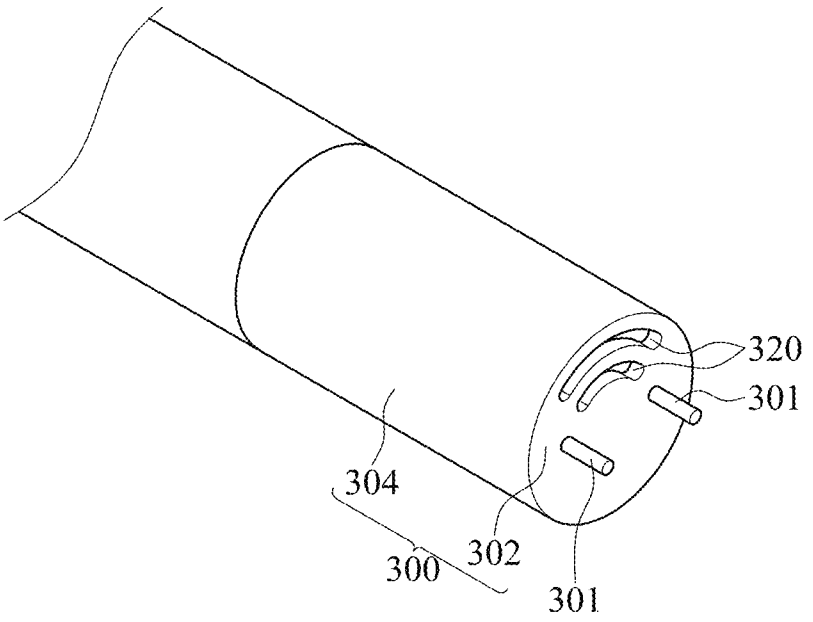

FIG.74

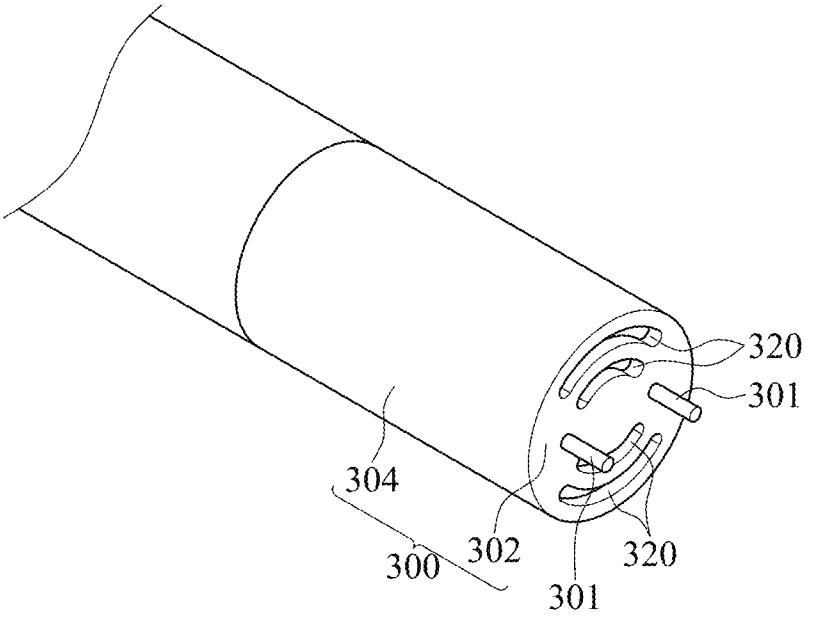

FIG.75

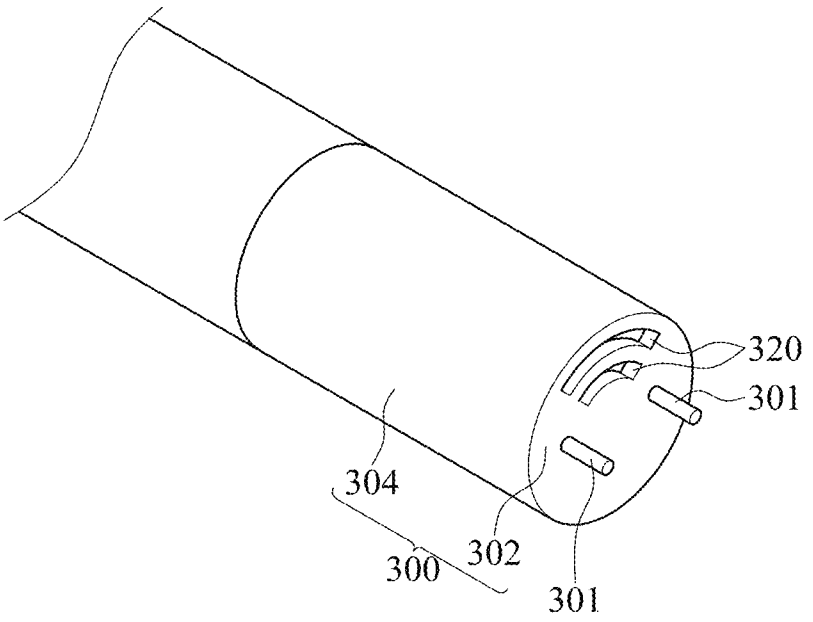

FIG.76

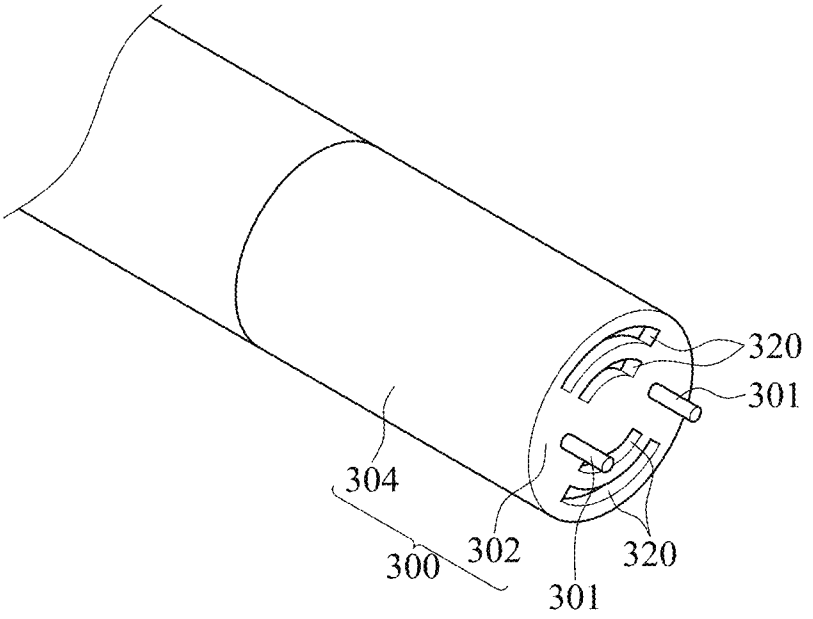

FIG.77

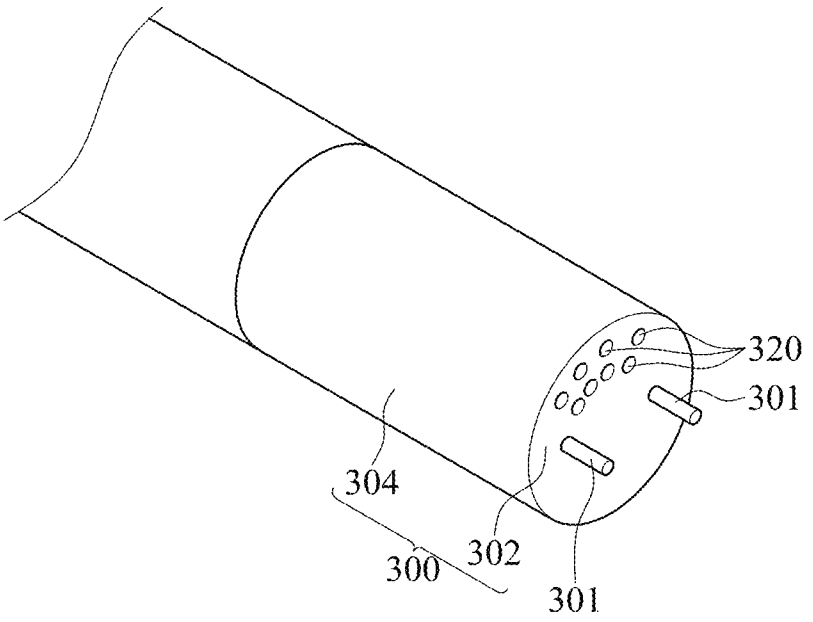

FIG.78

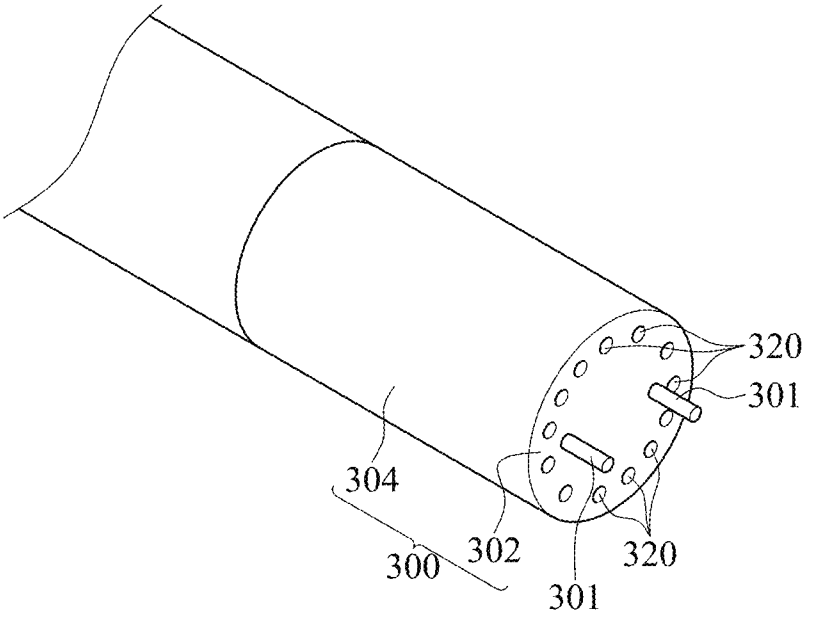

FIG.79

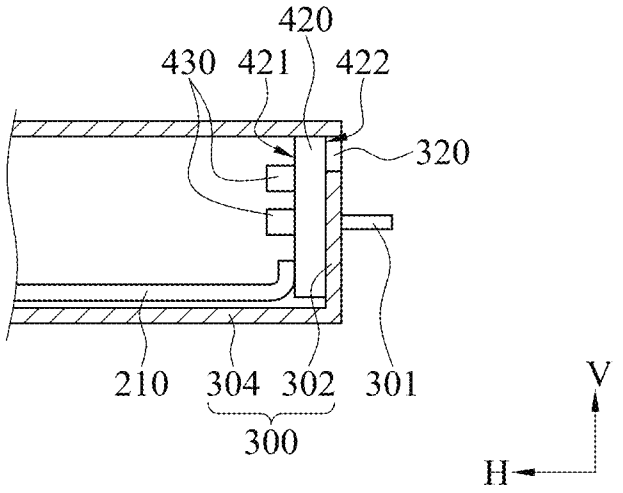
420
430
421
422
320
210
304
302
301
300
V
H

FIG.80

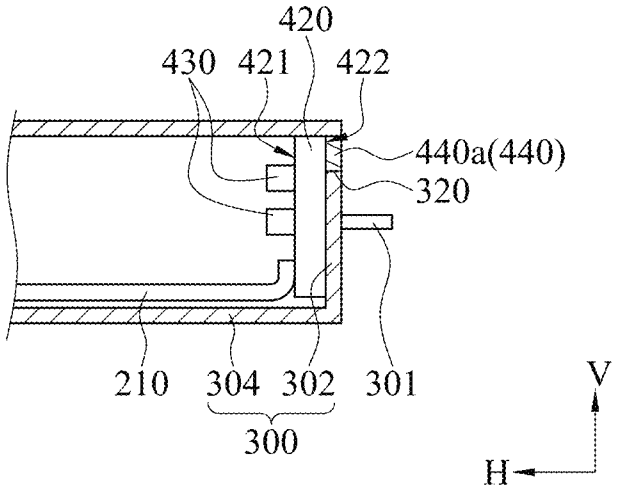
420
430
421
422
440a(440)
320
210
304
302
301
300
V
H

FIG.81

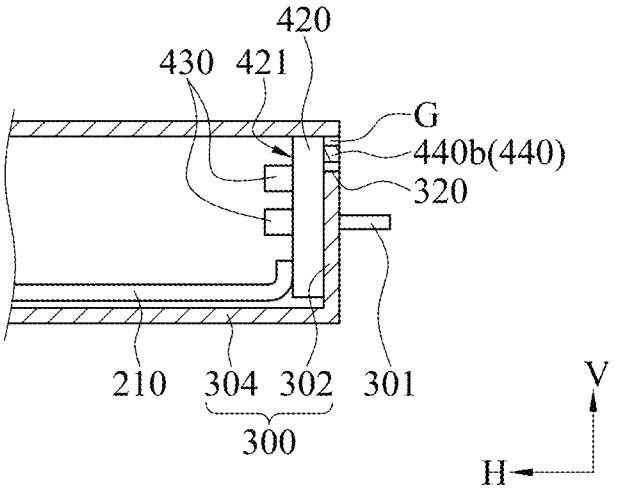
420
430
421
G
440b(440)
320
210
304
302
301
300
V
H

FIG.82

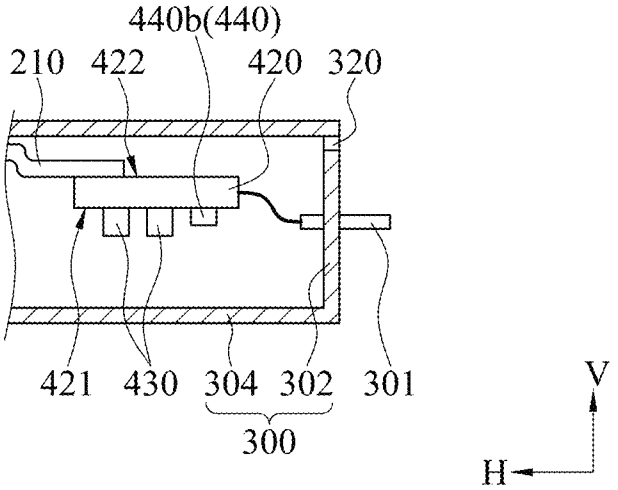
440b(440)
210
422
420
320
421
430
304
302
301
300
V
H

FIG.83

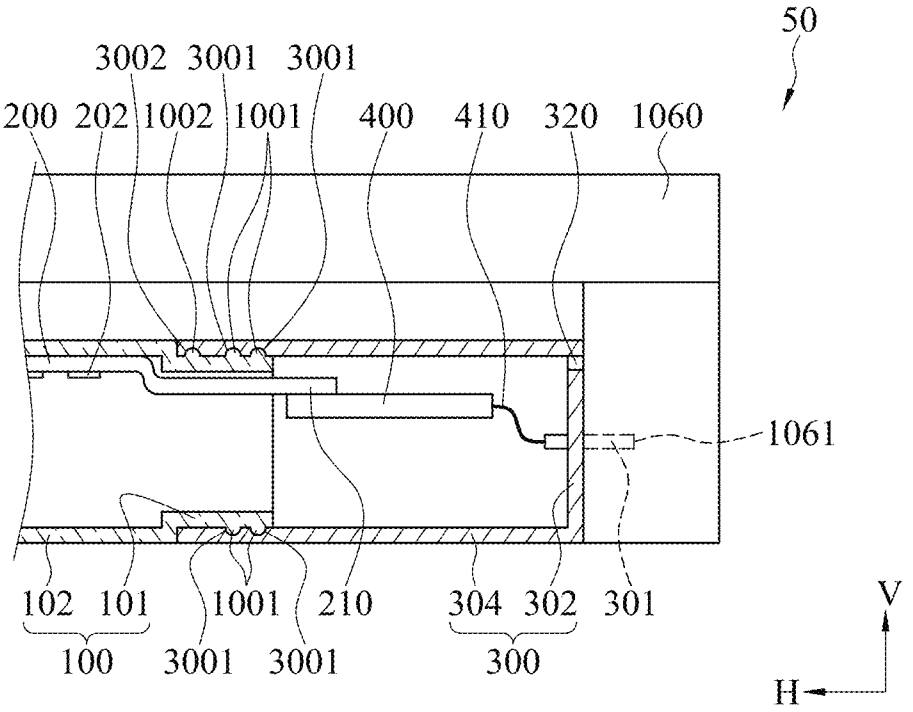
50
3002
3001
3001
200
202
1002
1001
400
410
320
1060
1061
102
101
1001
210
304
302
301
100
3001
3001
300
V
H

FIG.84

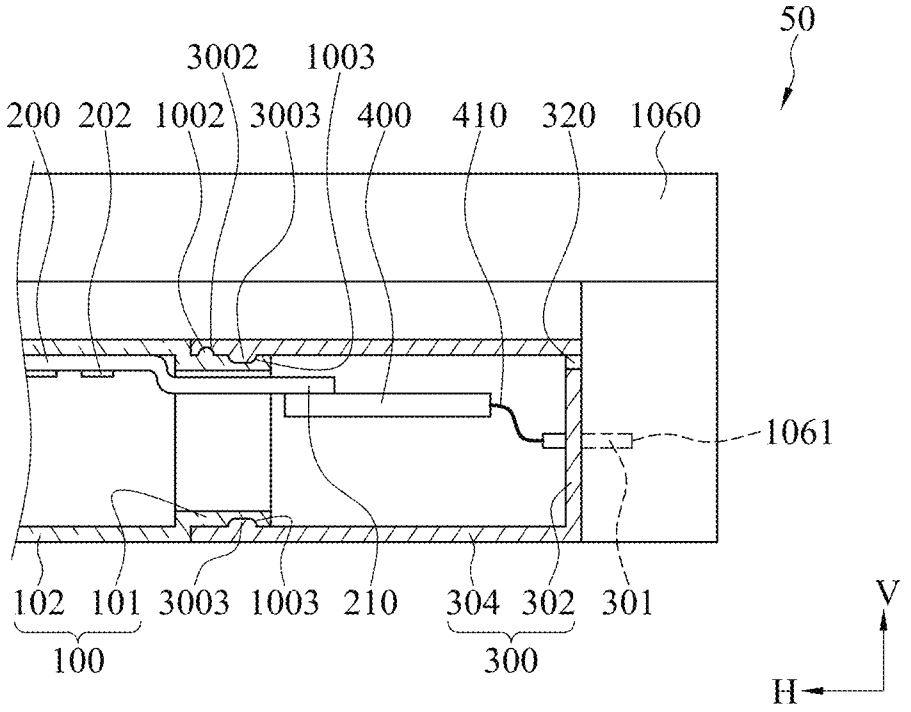
50
3002
1003
200
202
1002
3003
400
410
320
1060
1061
102
101
3003
1003
210
304
302
301
100
300
V
H

FIG.85

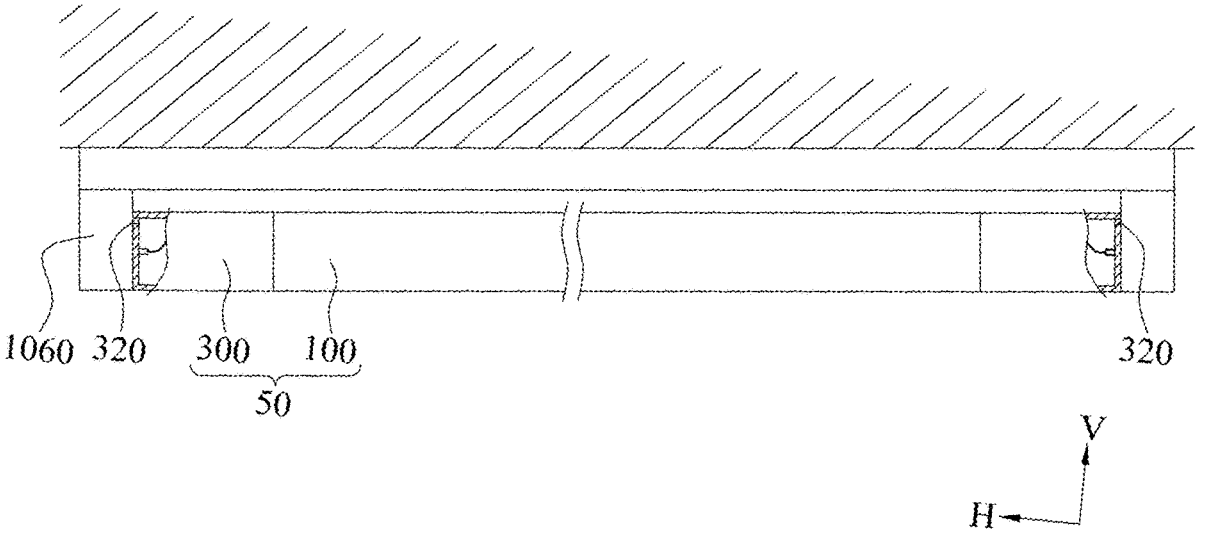

FIG.86

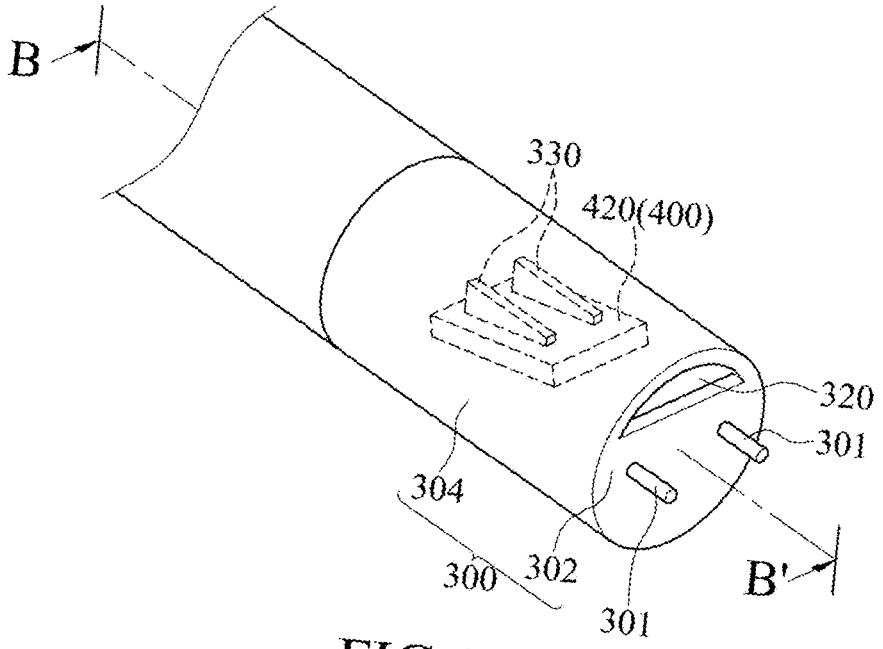

FIG.87

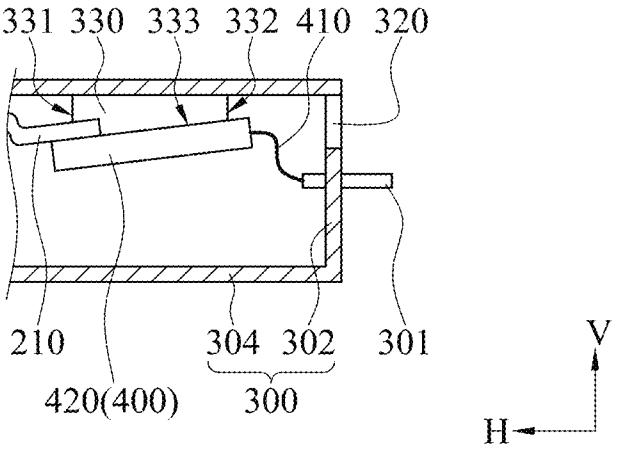

FIG.88

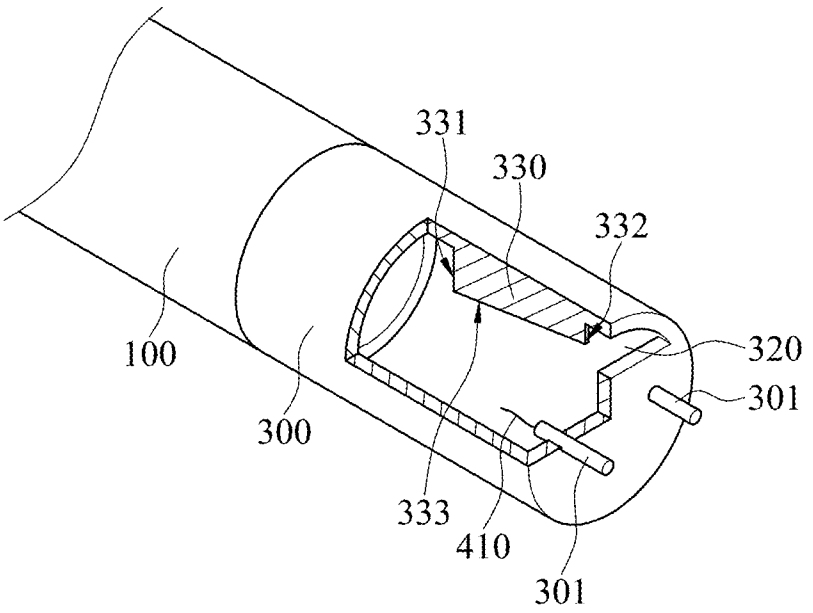
331
330
332
320
301
100
300
333
410
301

FIG.89

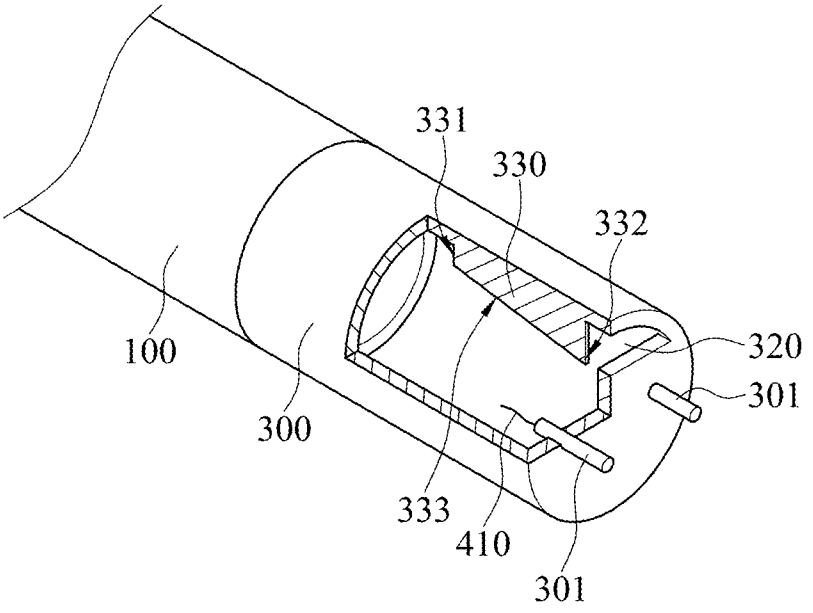
331
330
332
320
301
100
300
333
410
301

FIG.90

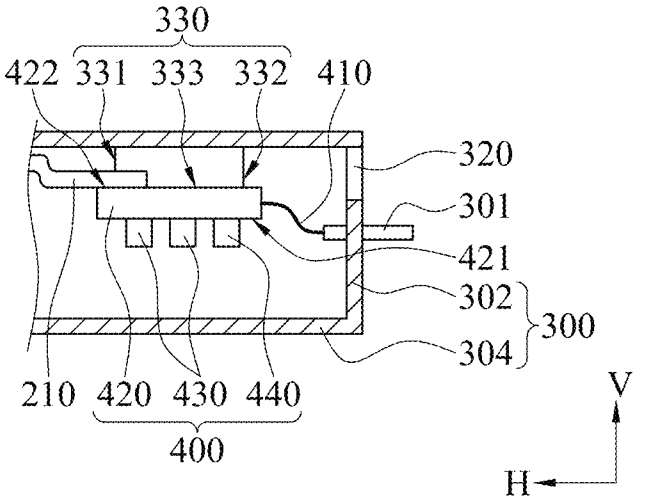
330
422
331
333
332
410
320
301
421
302
300
304
210
420
430
440
400
V
H

FIG.91

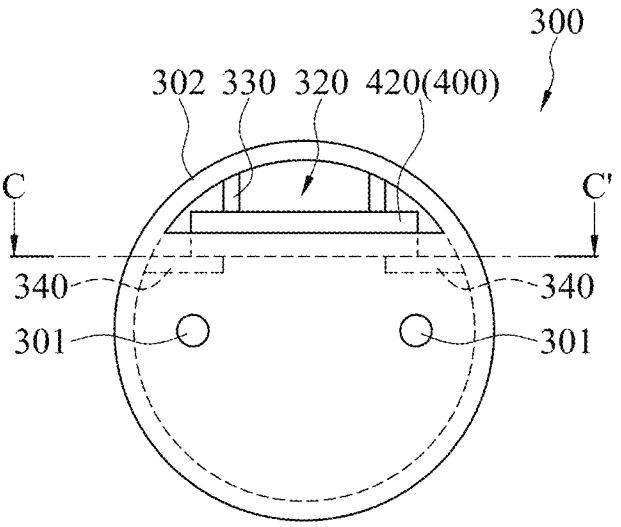
300
302 330 320 420(400)
C
C'
340
340
301
301

FIG.92

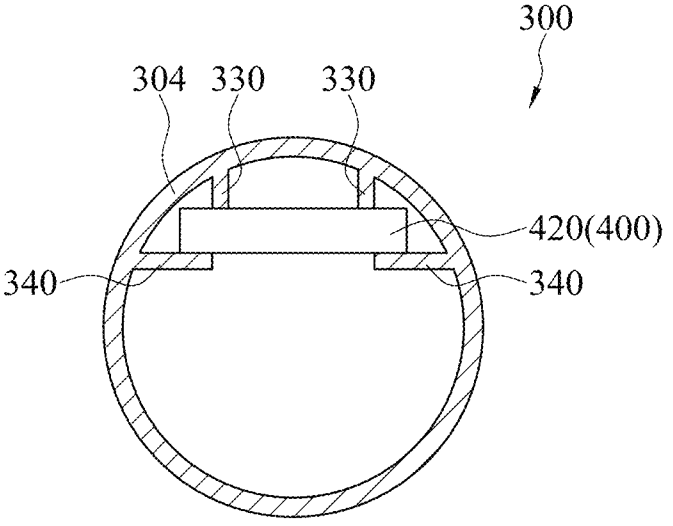
300
304 330 330
420(400)
340
340

FIG.93

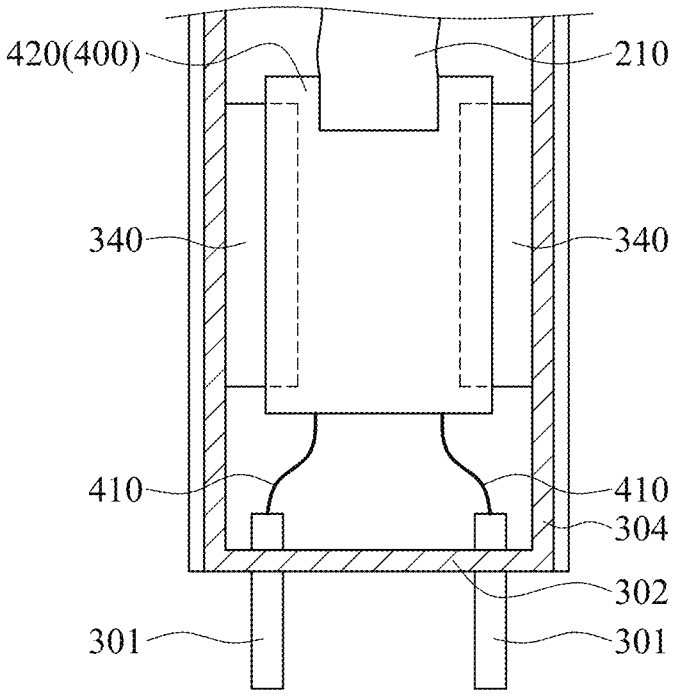
420(400)
210
340
340
410
410
304
302
301
301

FIG.94

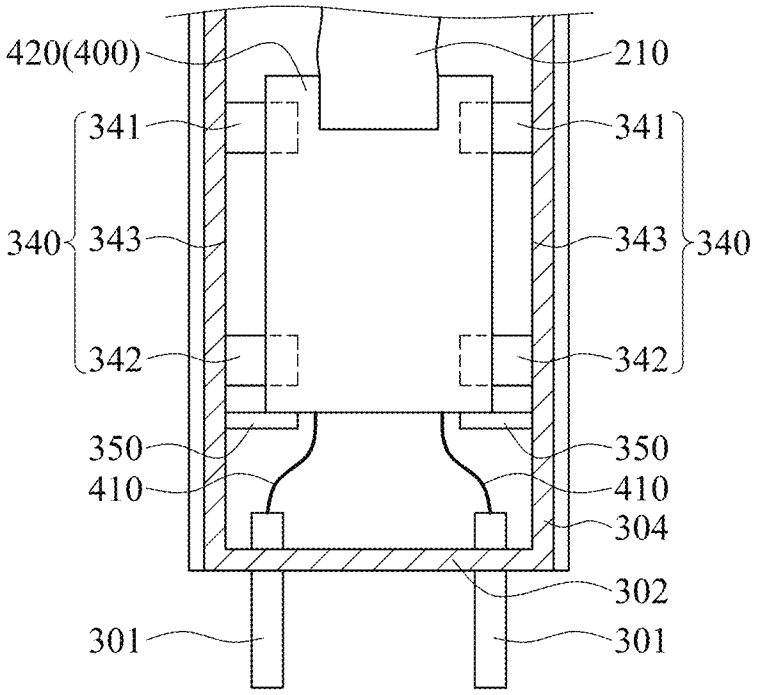
420(400)
210
341
341
340
343
343
340
342
342
350
350
410
410
304
302
301
301

FIG.95

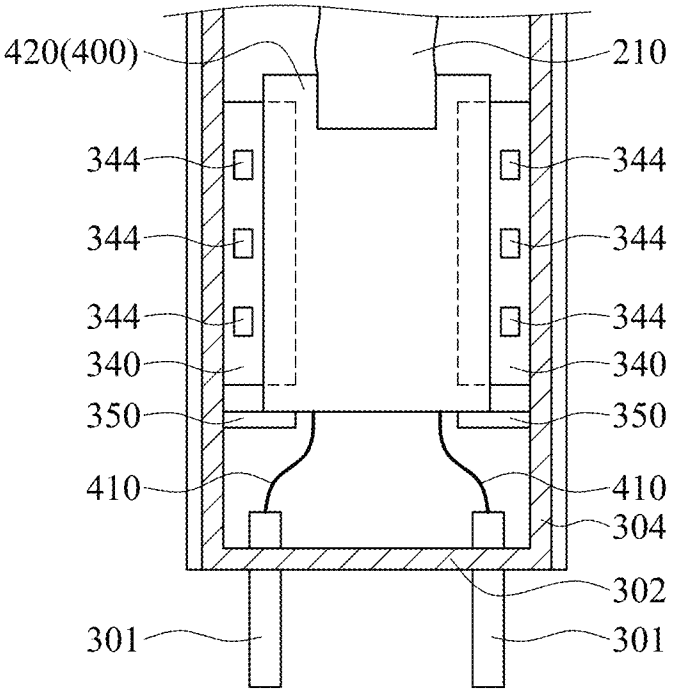
420(400)
210
344
344
344
344
344
344
340
340
350
350
410
410
304
302
301
301

FIG.96

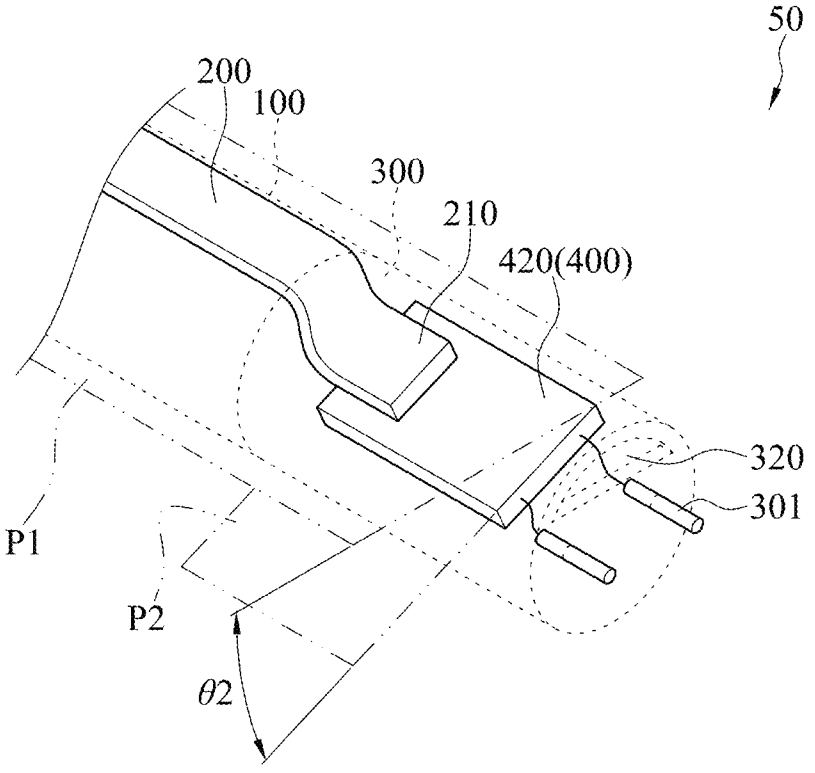
50
200
100
300
210
420(400)
320
301
P1
P2
θ2

FIG.97

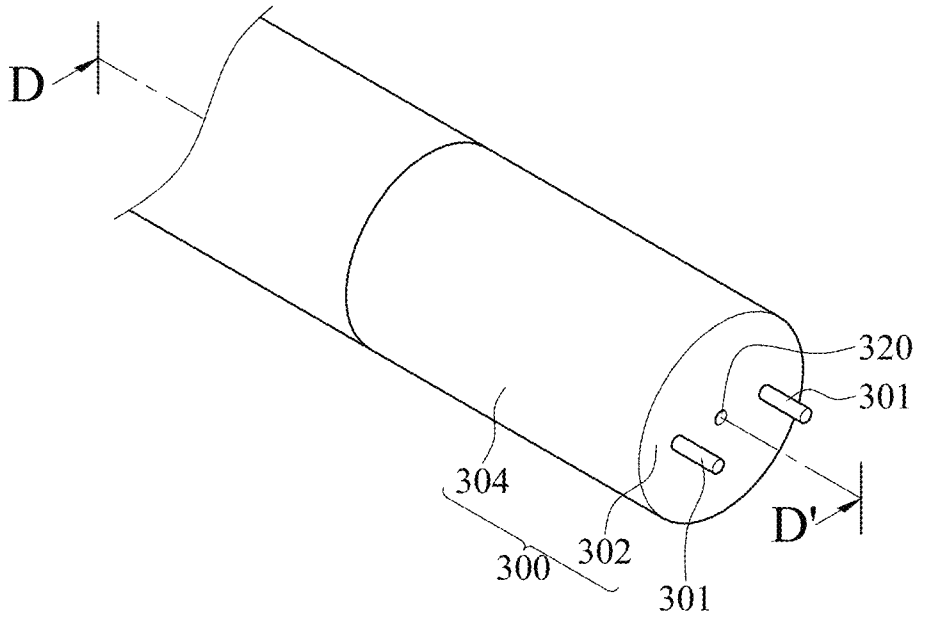
D
320
301
304
D'
302
300
301

FIG.98

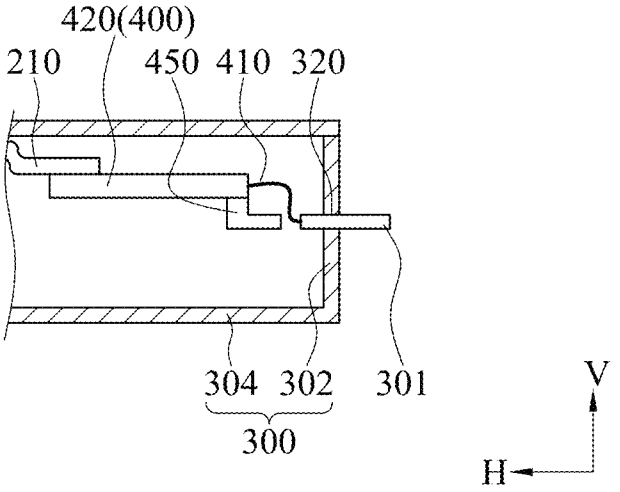
420(400)
210
450
410
320
304
302
301
300
V
H

FIG.99

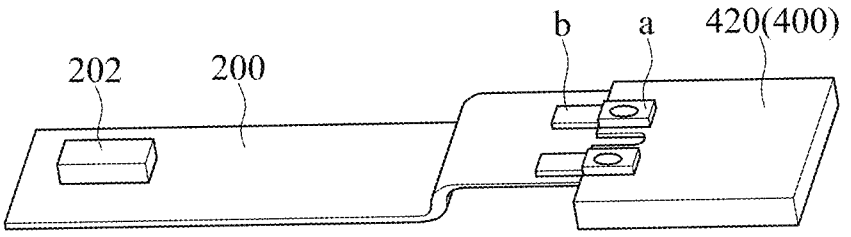

FIG.100

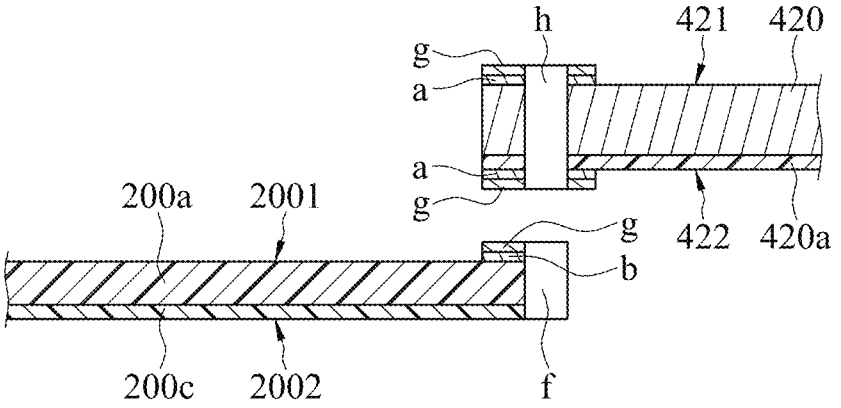

FIG.101

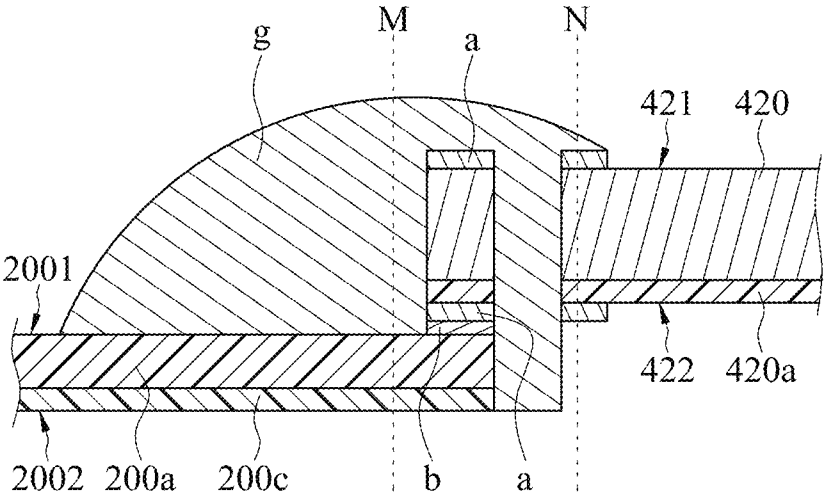

FIG.102

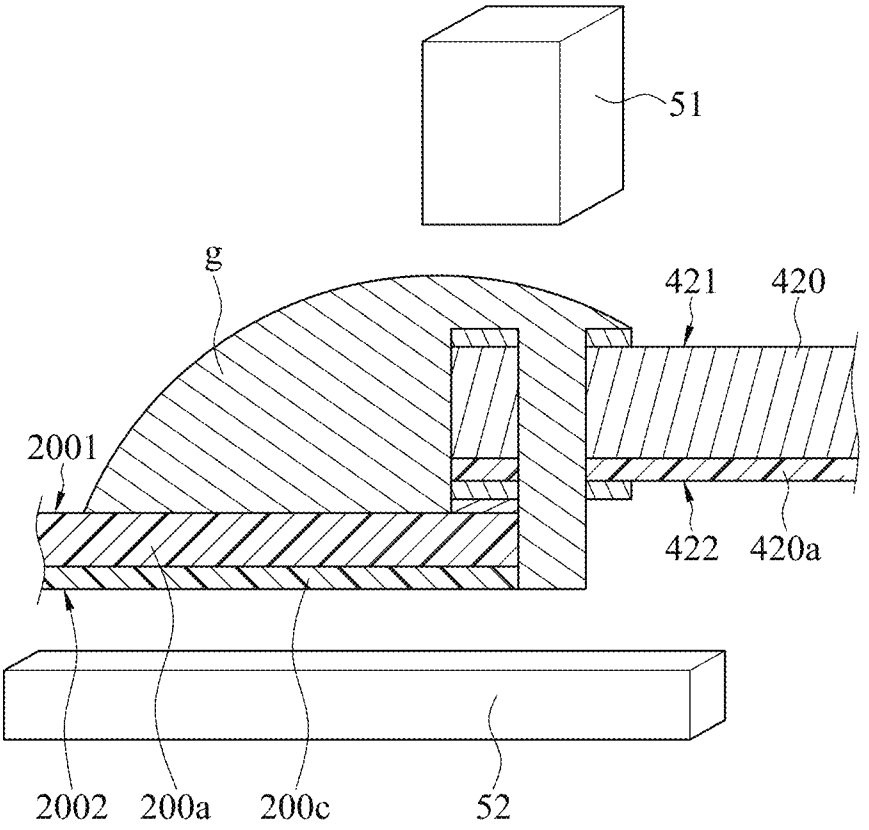

FIG.103

LED TUBE LAMP

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation application of U.S. application Ser. No. 15/888,335 filed on Feb. 5, 2018 which is a continuation application of U.S. application Ser. No. 15/643,034 filed on Jul. 6, 2017 which is a continuation-in-part application of U.S. application Ser. No. 15/298,955 filed on Oct. 20, 2016 and issued at U.S. Pat. No. 9,845,923 on Dec. 19, 2017, U.S. application Ser. No. 15/055,630 filed on Feb. 28, 2016, U.S. application Ser. No. 15/339,221 filed on Oct. 31, 2016, U.S. application Ser. No. 15/258,068 filed on Sep. 7, 2016, U.S. application Ser. No. 15/211,783 filed on Jul. 15, 2016, and U.S. application Ser. No. 15/483,368 filed on Apr. 10, 2017, wherein the Ser. No. 15/298,955 application is a continuation application of U.S. application Ser. No. 14/865,387 filed in United States on Sep. 25, 2015, which itself claims Chinese priorities under 35 U.S.C. § 119(a) of Patent Applications No. CN 201410507660.9 filed on 2014 Sep. 28; CN 201410508899.8 filed on 2014 Sep. 28; CN 201410623355.6 filed on 2014 Nov. 6; CN 201410734425.5 filed on 2014 Dec. 5; CN 201510075925.7 filed on 2015 Feb. 12; CN 201510104823.3 filed on 2015 Mar. 10; CN 201510134586.5 filed on 2015 Mar. 26; CN 201510133689.x filed on 2015 Mar. 25; CN 201510136796.8 filed on 2015 Mar. 27; CN 201510173861.4 filed on 2015 Apr. 14; CN 201510155807.7 filed on 2015 Apr. 3; CN 201510193980.6 filed on 2015 Apr. 22; CN 201510372375.5 filed on 2015 Jun. 26; CN 201510259151.3 filed on 2015 May 19; CN 201510268927.8 filed on 2015 May 22; CN 201510284720.x filed on 2015 May 29; CN 201510338027.6 filed on 2015 Jun. 17; CN 201510315636.x filed on 2015 Jun. 10; CN 201510373492.3 filed on 2015 Jun. 26; CN 201510364735.7 filed on 2015 Jun. 26; CN 201510378322.4 filed on 2015 Jun. 29; CN 201510391910.1 filed on 2015 Jul. 2; CN 201510406595.5 filed on 2015 Jul. 10; CN 201510482944.1 filed on 2015 Aug. 7; CN 201510486115.0 filed on 2015 Aug. 8; CN 201510428680.1 filed on 2015 Jul. 20; CN 201510483475.5 filed on 2015 Aug. 8; CN 201510555543.4 filed on 2015 Sep. 2; CN 201510557717.0 filed on 2015 Sep. 6; CN 201510595173.7 filed on 2015 Sep. 18; CN 201510724263.1 filed on 2015 Oct. 29; and CN 201510726365.7 filed on 2015 Oct. 30, the disclosures of which are incorporated herein in their entirety by reference. The U.S. application Ser. No. 15/888,335 is also a continuation application of U.S. application Ser. No. 15/211,783 filed on Jul. 15, 2016 which is a continuation-in-part application of U.S. application Ser. No. 14/865,387 filed on Sep. 25, 2015, the disclosures of which are incorporated herein in their entirety by reference.

FIELD OF THE INVENTION

The present disclosure relates to illumination devices, and more particularly to an LED tube lamp and its components including the light sources, electronic components, and end caps.

BACKGROUND

LED lighting technology is rapidly developing to replace traditional incandescent and fluorescent lightings. LED tube lamps are mercury-free in comparison with fluorescent tube lamps that need to be filled with inert gas and mercury. Thus, it is not surprising that LED tube lamps are becoming a highly desired illumination option among different available lighting systems used in homes and workplaces, which used to be dominated by traditional lighting options such as compact fluorescent light bulbs (CFLs) and fluorescent tube lamps. Benefits of LED tube lamps include improved durability and longevity and far less energy consumption; therefore, when taking into account all factors, they would typically be considered as a cost effective lighting option.

Typical LED tube lamps have a lamp tube, a circuit board disposed inside the lamp tube with light sources being mounted on the circuit board, and end caps accompanying a power supply provided at two ends of the lamp tube with the electricity from the power supply transmitting to the light sources through the circuit board. However, existing LED tube lamps have certain drawbacks. For example, the electrical components and fuses in the LED tube lamps may not perform properly due to increasing temperature inside the LED tube lamps during the use of the LED tube lamps. Specifically, the fuses very likely incorrectly cause open circuit in responsive to high environment temperature inside the LED tube lamps instead of high electrical current flow. The electrical components operate in unexpected ways which are different from circuit design.

Grainy visual appearances are also often found in the aforementioned conventional LED tube lamp. The LED chips spatially arranged on the circuit board inside the lamp tube are considered as spot light sources, and the lights emitted from these LED chips generally do not contribute uniform illuminance for the LED tube lamp without proper optical manipulation. As a result, the entire tube lamp would exhibit a grainy or non-uniform illumination effect to a viewer of the LED tube lamp, thereby negatively affecting the visual comfort and even narrowing the viewing angles of the lights. As a result, the quality and aesthetics requirements of average consumers would not be satisfied. To address this issue, the Chinese patent application with application no. CN 201320748271.6 discloses a diffusion tube is disposed inside a glass lamp tube to avoid grainy visual effects.

However, the disposition of the diffusion tube incurs an interface on the light transmission path to increase the likelihood of total reflection and therefore decrease the light outputting efficiency. In addition, the optical rotatory absorption of the diffusion tube decreases the light outputting efficiency.

Furthermore, all of the electronic components of the power supply circuit disclosed in the Chinese patent application with application no. CN 201320748271.6 are in the end caps. The heat dissipation of the power supply circuit in the small space of the end cap illustrated in the Chinese application is insufficient, therefore the power supply circuit is easier to be damaged.

Next, the driving of an LED uses a DC driving signal. The driving signal for a fluorescent lamp is a low-frequency and low-voltage AC signal as provided by an AC powerline, a high-frequency and high-voltage AC signal provided by a ballast, or even a DC signal provided by a battery for emergency lighting applications. Since the voltages and frequency spectrums of these types of signals differ significantly, simply performing a rectification to produce the required DC driving signal in an LED tube lamp is not competent at achieving the LED tube lamp's compatibility with traditional driving systems of a fluorescent lamp.

Common main types of ballast include instant-start ballast and program-start ballast. A ballast typically includes a

resonant circuit and is designed to match the loading characteristics of a fluorescent lamp in driving the fluorescent lamp.

However, an LED is a nonlinear component with significantly different characteristics from a fluorescent lamp. Therefore, using an LED tube lamp with an electrical ballast impacts the resonant circuit design of the electrical ballast, causing a compatibility problem. Generally, a program-start ballast will detect the presence of a filament in a fluorescent lamp, but traditional LED driving circuits cannot support the detection and may cause a failure of the filament detection and thus failure of the starting of the LED tube lamp. Further, electrical ballast is in effect a current source, and when it acts as a power supply of a DC-to-DC converter circuit in an LED tube lamp, problems of overvoltage and overcurrent or undervoltage and undercurrent are likely to occur, resulting in damaging of electronic components in the LED tube lamp or unstable provision of lighting by the LED tube lamp.

Accordingly, the prevent disclosure and its embodiments are herein provided.

SUMMARY OF THE INVENTION

It's specially noted that the present disclosure may actually include one or more inventions claimed currently or not yet claimed, and for avoiding confusion due to unnecessarily distinguishing between those possible inventions at the stage of preparing the specification, the possible plurality of inventions herein may be collectively referred to as "the (present) invention" herein.

Various embodiments are summarized in this section, and are described with respect to the "present invention," which terminology is used to describe certain presently disclosed embodiments, whether claimed or not, and is not necessarily an exhaustive description of all possible embodiments, but rather is merely a summary of certain embodiments. Certain of the embodiments described below as various aspects of the "present invention" can be combined in different manners to form an LED tube lamp or a portion thereof.

The present invention provides a novel LED tube lamp, and aspects thereof.

According to some embodiments, a LED tube lamp comprises a tube having two ends, two end caps respectively at the ends of the tube, a power supply in one or both of the end caps, an LED light strip in the tube; and a plurality of LED light sources on the LED light strip. Each of the end caps comprises a lateral wall substantially coaxial with the tube, an end wall substantially perpendicular to an axial direction of the lateral wall, and at least one opening penetrating through the end wall. an axial direction of the at least one opening is substantially parallel with an axial direction of the lateral wall. The LED light sources electrically connected to the power supply via the LED light strip. Accordingly, the closest element will have better heat dissipation effect and this makes the LED tube lamp operate normally.

According to some embodiments, an end wall radius "r" is defined as the shortest distance between the center of the end wall and the periphery of the end wall, a distance "L" is defined as the shortest distance between the center of the end wall and the opening in the radial direction of the end cap, and the distance "L" is a ratio from 2/5 to 4/5 of the end wall radius "r".

According to some embodiments, the LED light strip has two ends. At least one end of the LED light strip is in one of the end caps.

According to some embodiments, the end cap further comprises two pins for receiving an external driving signal. The power supply comprises a fuse electrically connecting with one of the pins.

According to some embodiments, the power supply is electrically connected with one of the pins through a wire.

According to some embodiments, the power supply comprises a printed circuit board and electronic components. The printed circuit board comprises a first surface and a second surface opposite to and substantially parallel with each other. The first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall. The electronic components have at least one inductor, transistor, capacitor, resistor, or integrated circuit on the first surface of the printed circuit board. The at least one inductor, transistor, capacitor, resistor, or the integrated circuit is near an edge of the first surface and is closest among the components on the first surface.

According to some embodiments, an LED tube lamp comprises a tube having two ends, a first end cap at one of the ends of the tube, a power supply in the first end cap, an LED light strip in the tube, and a plurality of LED light sources on the LED light strip. The LED light sources electrically connected to the power supply via the LED light strip. The first end cap comprises a lateral wall substantially coaxial with the tube and connected to the tube, an end wall substantially perpendicular to an axial direction of the lateral wall and connected to an end of the lateral wall away from the tube, and at least one opening penetrating through the end wall. The power supply comprises a printed circuit board and electronic components. The printed circuit board comprises a first surface and a second surface opposite to and substantially parallel with each other. The first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall. The electronic components have at least one inductor, capacitor, or resistor on the first surface of the printed circuit board. The at least one inductor, capacitor, or resistor is near an edge of the first surface and is closest among the components on the first surface to the at least one opening.

According to some embodiments, the LED tube lamp a second end cap at another one of the ends of the tube.

According to some embodiments, the power supply comprises another printed circuit board. Some of the electronic components are on the another printed circuit board. The another printed circuit board and electronic components thereon are in the second end cap.

According to some embodiments, the second end cap comprises a lateral wall substantially coaxial with the tube and connected to the tube, an end wall substantially perpendicular to an axial direction of the lateral wall and connected to an end of the lateral wall away from the tube, and another opening penetrating through the end wall. The electronic components on the another printed circuit board have at least one inductor, transistor, capacitor, or resistor on a surface of the another printed circuit board. The at least one inductor, transistor, capacitor, or resistor is near an edge of the surface of the another printed circuit board and is closest among the components on the surface of the another printed circuit board to the another opening.

According to some embodiments, the second end cap further comprises two pins for receiving an external driving signal. The electronic components of the power supply further comprise a fuse electrically connecting with one of the pins. According to some embodiments, an LED tube lamp comprises a tube having two ends, an LED light strip in the tube, a plurality of LED light sources on the LED light

strip, two end caps respectively at the two ends of the tube, and a power supply circuit on the LED light strip. At least one of the end caps comprises a lateral wall substantially coaxial with the tube and connected to the tube, an end wall substantially perpendicular to an axial direction of the lateral wall and connected to an end of the lateral wall away from the tube, at least one opening penetrating through the end wall, and two pins on the end wall for receiving an external driving signal. The power supply circuit has at least one inductor or resistor. The at least one inductor or resistor is near an edge of the LED light strip and is closest among the at least one inductor or resistor to the at least one opening.

According to some embodiments, the power supply circuit comprises a rectifying circuit, a filtering circuit, an LED module and a ballast-compatible circuit. The rectifying circuit is configured to rectify the external driving signal to produce a rectified signal. The filtering circuit is connected to the rectifying circuit and configured to produce a filtered signal. The ballast-compatible circuit is connected between the pins and the rectifying circuit, between the rectifying circuit and filtering circuit, or between the filtering circuit and the plurality of LED light sources.

According to some embodiments, the rectifying circuit comprises a terminal adapter circuit and a rectifying unit. The terminal adapter circuit comprises a fuse connected between one of the pins and the rectifying unit.

According to some embodiments, an LED tube lamp comprises a tube having two ends, an LED light strip in the tube, a plurality of LED light sources on the LED light strip, two end caps respectively at the two ends of the tube, and a power supply circuit on the LED light strip. At least one of the end caps comprises a lateral wall substantially coaxial with the tube and connected to the tube, an end wall substantially perpendicular to an axial direction of the lateral wall and connected to an end of the lateral wall away from the tube, at least one opening penetrating through the end wall, and two pins on the end wall for receiving an external driving signal. The power supply circuit has at least one capacitor, diode, or fuse. The at least one capacitor, diode, or fuse is near an edge of the LED light strip and is closest among the at least one capacitor, diode, or fuse to the at least one opening.

According to some embodiments, the power supply circuit comprises a rectifying circuit, a filtering circuit, an LED module and a ballast-compatible circuit. The rectifying circuit is configured to rectify the external driving signal to produce a rectified signal. The filtering circuit is connected to the rectifying circuit and configured to produce a filtered signal. The ballast-compatible circuit is connected between the pins and the rectifying circuit, between the rectifying circuit and filtering circuit, or between the filtering circuit and the plurality of LED light sources.

According to some embodiments, the power supply circuit further comprises a filtering unit connected between one of the two pins of one of the two end caps and the corresponding rectifying circuit. The filtering unit comprises an inductor. The rectifying circuit comprises a current-limiting capacitor and a rectifying unit connected with the current-limiting capacitor. The filtering circuit comprises a capacitor.

According to some embodiments, an LED tube lamp comprises a tube having two ends, an end cap at one of the ends of the tube, a power supply in the end cap, an LED light strip in the tube, and a plurality of LED light sources on the LED light strip. The LED light sources electrically connected to the power supply via the LED light strip. The end cap comprises a lateral wall substantially coaxial with the tube and connected to the tube, an end wall substantially perpendicular to an axial direction of the lateral wall and connected to an end of the lateral wall away from the tube, and at least one opening penetrating through the end wall. The power supply comprises a printed circuit board and electronic components. The printed circuit board comprises a first surface and a second surface opposite to and substantially parallel with each other. The first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall. The electronic components have at least one inductor, transistor, capacitor, diode, integrated circuit, or resistor on the first surface of the printed circuit board. The at least one inductor, transistor, capacitor, diode, integrated circuit, or resistor is near an edge of the first surface and is closest among the components on the first surface to the at least one opening.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a perspective view schematically illustrating an LED tube lamp according to one embodiment of the present invention;

FIG. **1**A is a perspective view schematically illustrating the different length end caps of an LED tube lamp according to another embodiment of the present invention to illustrate;

FIG. **1**B is an exemplary exploded view schematically illustrating the LED tube lamp shown in FIG. **1**;

FIG. **2** illustrates an exploded view of an LED tube lamp including a heat shrink sleeve according to an embodiment of the present invention;

FIG. **3** is a perspective view schematically illustrating front and top of an end cap of the LED tube lamp according to one embodiment of the present invention;

FIG. **4** is an exemplary perspective view schematically illustrating bottom of the end cap as shown in FIG. **3**;

FIG. **5** is a plane cross-sectional partial view schematically illustrating a connecting region of the end cap and the lamp tube of the LED tube lamp according to one embodiment of the present invention;

FIG. **6** is a perspective cross-sectional view schematically illustrating inner structure of an all-plastic end cap (having a magnetic metal member and hot melt adhesive inside) according to another embodiment of the present invention;

FIG. **7** is a perspective view schematically illustrating the all-plastic end cap and the lamp tube being bonded together by utilizing an induction coil according to certain embodiments of the present invention;

FIG. **8** is a perspective view schematically illustrating a supporting portion and a protruding portion of the electrically insulating tube of the end cap of the LED tube lamp according to the another embodiment of the present invention;

FIG. **9** is an exemplary plane cross-sectional view schematically illustrating the inner structure of the electrically insulating tube and the magnetic metal member of the end cap of FIG. **8** taken along a line X-X;

FIG. **10** is a plane view schematically illustrating the configuration of the openings on surface of the magnetic metal member of the end cap of the LED tube lamp according to the another embodiment of the present invention;

FIG. **11** is a plane view schematically illustrating the indentation/embossment on a surface of the magnetic metal member of the end cap of the LED tube lamp according to certain embodiments of the present invention;

FIG. **12** is an exemplary plane cross-sectional view schematically illustrating the structure of the connection of the

end cap of FIG. **8** and the lamp tube along a radial axis of the lamp tube, where the electrically insulating tube is in shape of a circular ring;

FIG. **13** is an exemplary plane cross-sectional view schematically illustrating the structure of the connection of the end cap of FIG. **8** and the lamp tube along a radial axis of the lamp tube, where the electrically insulating tube is in shape of an elliptical or oval ring;

FIG. **14** is a perspective view schematically illustrating still another end cap of an LED tube lamp according to still another embodiment of the prevent invention;

FIG. **15** is a plane cross-sectional view schematically illustrating end structure of a lamp tube of the LED tube lamp according to one embodiment of the present invention;

FIG. **16** is an exemplary plane cross-sectional view schematically illustrating the local structure of the transition region of the end of the lamp tube of FIG. **15**;

FIG. **17** is a plane cross-sectional view schematically illustrating inside structure of the lamp tube of the LED tube lamp according to one embodiment of the present invention, wherein two reflective films are respectively adjacent to two sides of the LED light strip along the circumferential direction of the lamp tube;

FIG. **18** is a plane cross-sectional view schematically illustrating inside structure of the lamp tube of the LED tube lamp according to another embodiment of the present invention, wherein only a reflective film is disposed on one side of the LED light strip along the circumferential direction of the lamp tube;

FIG. **19** is a plane cross-sectional view schematically illustrating inside structure of the lamp tube of the LED tube lamp according to still another embodiment of the present invention, wherein the reflective film is under the LED light strip and extends at both sides along the circumferential direction of the lamp tube;

FIG. **20** is a plane cross-sectional view schematically illustrating inside structure of the lamp tube of the LED tube lamp according to yet another embodiment of the present invention, wherein the reflective film is under the LED light strip and extends at only one side along the circumferential direction of the lamp tube;

FIG. **21** is a plane cross-sectional view schematically illustrating inside structure of the lamp tube of the LED tube lamp according to still yet another embodiment of the present invention, wherein two reflective films are respectively adjacent to two sides of the LED light strip and extending along the circumferential direction of the lamp tube;

FIG. **22** is a plane sectional view schematically illustrating the LED light strip is a bendable circuit sheet with ends thereof passing across the transition region of the lamp tube of the LED tube lamp to be soldering bonded to the output terminals of the power supply according to one embodiment of the present invention;

FIG. **23** is a plane cross-sectional view schematically illustrating a bi-layered structure of the bendable circuit sheet of the LED light strip of the LED tube lamp according to an embodiment of the present invention;

FIG. **24** is a perspective view schematically illustrating the soldering pad of the bendable circuit sheet of the LED light strip for soldering connection with the printed circuit board of the power supply of the LED tube lamp according to one embodiment of the present invention;

FIG. **25** is a plane view schematically illustrating the arrangement of the soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to one embodiment of the present invention;

FIG. **26** is a plane view schematically illustrating a row of three soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to another embodiment of the present invention;

FIG. **27** is a plane view schematically illustrating two rows of soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to still another embodiment of the present invention;

FIG. **28** is a plane view schematically illustrating a row of four soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to yet another embodiment of the present invention;

FIG. **29** is a plane view schematically illustrating two rows of two soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to yet still another embodiment of the present invention;

FIG. **30** is a plane view schematically illustrating through holes are formed on the soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to one embodiment of the present invention;

FIG. **31** is a plane cross-sectional view schematically illustrating soldering bonding process utilizing the soldering pads of the bendable circuit sheet of the LED light strip of FIG. **30** taken from side view and the printed circuit board of the power supply according to one embodiment of the present invention;

FIG. **32** is a plane cross-sectional view schematically illustrating soldering bonding process utilizing the soldering pads of the bendable circuit sheet of the LED light strip of FIG. **30** taken from side view and the printed circuit board of the power supply according to another embodiment of the present invention, wherein the through hole of the soldering pads is near the edge of the bendable circuit sheet;

FIG. **33** is a plane view schematically illustrating notches formed on the soldering pads of the bendable circuit sheet of the LED light strip of the LED tube lamp according to one embodiment of the present invention;

FIG. **34** is an exemplary plane cross-sectional view of FIG. **33** taken along a line A-A';

FIG. **35** is a perspective view schematically illustrating a circuit board assembly composed of the bendable circuit sheet of the LED light strip and the printed circuit board of the power supply according to another embodiment of the present invention;

FIG. **36** is a perspective view schematically illustrating another arrangement of the circuit board assembly of FIG. **35**;

FIG. **37** is a perspective view schematically illustrating an LED lead frame for the LED light sources of the LED tube lamp according to one embodiment of the present invention;

FIG. **38** is a perspective view schematically illustrating a power supply of the LED tube lamp according to one embodiment of the present invention;

FIG. **39** is a perspective view schematically illustrating the printed circuit board of the power supply, which is perpendicularly adhered to a hard circuit board made of aluminum via soldering according to another embodiment of the present invention;

FIG. **40** is a perspective view illustrating a thermos-compression head used in soldering the bendable circuit sheet of the LED light strip and the printed circuit board of the power supply according to one embodiment of the present invention;

FIG. **41** is a plane view schematically illustrating the thickness difference between two solders on the pads of the

bendable circuit sheet of the LED light strip or the printed circuit board of the power supply according to one embodiment of the invention;

FIG. **42** is a perspective view schematically illustrating the soldering vehicle for soldering the bendable circuit sheet of the LED light strip and the printed circuit board of the power supply according to one embodiment of the invention;

FIG. **43** is an exemplary plan view schematically illustrating a rotation status of the rotary platform of the soldering vehicle in FIG. **41**;

FIG. **44** is a plan view schematically illustrating an external equipment for heating the hot melt adhesive according to another embodiment of the present invention;

FIG. **45** is a cross-sectional view schematically illustrating the hot melt adhesive having uniformly distributed high permeability powder particles with small particle size according to one embodiment of the present invention;

FIG. **46** is a cross-sectional view schematically illustrating the hot melt adhesive having non-uniformly distributed high permeability powder particles with small particle size according to another embodiment of the present invention, wherein the powder particles form a closed electric loop;

FIG. **47** is a cross-sectional view schematically illustrating the hot melt adhesive having non-uniformly distributed high permeability powder particles with large particle size according to yet another embodiment of the present invention, wherein the powder particles form a closed electric loop;

FIG. **48** is a perspective view schematically illustrating the bendable circuit sheet of the LED light strip is formed with two conductive wiring layers according to another embodiment of the present invention;

FIG. **49**A is a block diagram of an exemplary power supply module **250** in an LED tube lamp according to some embodiments of the present invention;

FIG. **49**B is a block diagram of an exemplary power supply module **250** in an LED tube lamp according to some embodiments of the present invention;

FIG. **49**C is a block diagram of an exemplary LED lamp according to some embodiments of the present invention;

FIG. **49**D is a block diagram of an exemplary power supply module **250** in an LED tube lamp according to some embodiments of the present invention;

FIG. **49**E is a block diagram of an LED lamp according to some embodiments of the present invention;

FIG. **50**A is a schematic diagram of a rectifying circuit according to some embodiments of the present invention;

FIG. **50**B is a schematic diagram of a rectifying circuit according to some embodiments of the present invention;

FIG. **50**C is a schematic diagram of a rectifying circuit according to some embodiments of the present invention;

FIG. **50**D is a schematic diagram of a rectifying circuit according to some embodiments of the present invention;

FIG. **51**A is a schematic diagram of a terminal adapter circuit according to some embodiments of the present invention;

FIG. **51**B is a schematic diagram of a terminal adapter circuit according to some embodiments of the present invention;

FIG. **51**C is a schematic diagram of a terminal adapter circuit according to some embodiments of the present invention;

FIG. **51**D is a schematic diagram of a terminal adapter circuit according to some embodiments of the present invention;

FIG. **52**A is a block diagram of a filtering circuit according to some embodiments of the present invention;

FIG. **52**B is a schematic diagram of a filtering unit according to some embodiments of the present invention;

FIG. **52**C is a schematic diagram of a filtering unit according to some embodiments of the present invention;

FIG. **52**D is a schematic diagram of a filtering unit according to some embodiments of the present invention;

FIG. **52**E is a schematic diagram of a filtering unit according to some embodiments of the present invention;

FIG. **53**A is a schematic diagram of an LED module according to some embodiments of the present invention;

FIG. **53**B is a schematic diagram of an LED module according to some embodiments of the present invention;

FIG. **53**C is a plan view of a circuit layout of the LED module according to some embodiments of the present invention;

FIG. **53**D is a plan view of a circuit layout of the LED module according to some embodiments of the present invention;

FIG. **53**E is a plan view of a circuit layout of the LED module according to some embodiments of the present invention;

FIG. **54**A is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **54**B is a block diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**C is a schematic diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**D is a schematic diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**E is a schematic diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**F is a schematic diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**G is a block diagram of a driving circuit according to some embodiments of the present invention;

FIG. **54**H is a graph illustrating the relationship between the voltage Vin and the objective current Iout according to certain embodiments of the present invention;

FIG. **55**A is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **55**B is a schematic diagram of an anti-flickering circuit according to some embodiments of the present invention;

FIG. **56**A is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **56**B is a schematic diagram of a protection circuit according to some embodiments of the present invention;

FIG. **57**A is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **57**B is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**C is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**D is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**E is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**F is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**G is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**H is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiments of the present invention;

FIG. **57**I is a schematic diagram of a mode switching circuit in an LED lamp according to some embodiment of the present invention;

FIG. **58**A is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **58**B is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **58**C illustrates an arrangement with a ballast-compatible circuit in an LED lamp according to some embodiments of the present invention;

FIG. **58**D is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **58**E is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **58**F is a schematic diagram of a ballast-compatible circuit according to some embodiments of the present invention;

FIG. **58**G is a block diagram of an exemplary power supply module in an LED lamp according to some embodiments of the present invention;

FIG. **58**H is a schematic diagram of a ballast-compatible circuit according to some embodiments of the present invention;

FIG. **58**I illustrates a ballast-compatible circuit according to some embodiments of the present invention;

FIG. **59**A is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **59**B is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **59**C is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **59**D is a schematic diagram of a ballast-compatible circuit according to some embodiments of the present invention, which is applicable to the embodiments shown in FIGS. **59**A and **59**B and the described modification thereof;

FIG. **60**A is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **60**B is a schematic diagram of a filament-simulating circuit according to some embodiments of the present invention;

FIG. **60**C is a schematic block diagram including a filament-simulating circuit according to some embodiments of the present invention;

FIG. **60**D is a schematic block diagram including a filament-simulating circuit according to some embodiments of the present invention;

FIG. **60**E is a schematic diagram of a filament-simulating circuit according to some embodiments of the present invention;

FIG. **60**F is a schematic block diagram including a filament-simulating circuit according to some embodiments of the present invention;

FIG. **61**A is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **61**B is a schematic diagram of an OVP circuit according to an embodiment of the present invention;

FIG. **62**A is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **62**B is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **62**C is a block diagram of a ballast detection circuit according to some embodiments of the present invention;

FIG. **62**D is a schematic diagram of a ballast detection circuit according to some embodiments of the present invention;

FIG. **62**E is a schematic diagram of a ballast detection circuit according to some embodiments of the present invention;

FIG. **63**A is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **63**B is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **63**C is a schematic diagram of an auxiliary power module according to an embodiment of the present invention;

FIG. **64** is a block diagram of an exemplary power supply module in an LED tube lamp according to some embodiments of the present invention;

FIG. **65** illustrates a block diagram of an exemplary power supply module in an LED tube lamp according to one embodiment of the present invention;

FIG. **66** illustrates a perspective view of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **67** illustrates an exploded view of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **68** illustrates a partial view of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **69** illustrates a part of a cross section of FIG. **3** along the line A-A';

FIG. **70** illustrates a part of a cross section of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **71** illustrates a part of a cross section of an LED tube lamp according to an embodiment of the instant disclosure;

FIGS. **72** to **79** illustrate partial views of LED tube lamps according to several embodiments of the instant disclosure;

FIGS. **80** to **83** illustrate a part of cross sections of LED tube lamps according to several embodiments of the instant disclosure;

FIGS. **84** and **85** illustrate a part of cross sections of LED tube lamps installed to lamp bases according to several embodiments of the instant disclosure;

FIG. **86** illustrates a perspective view of an LED tube lamp installed to a lamp base according to an embodiment of the instant disclosure;

FIG. **87** illustrates a partial view of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **88** illustrates a part of a cross section of FIG. **87** along the line B-B';

FIG. **89** illustrates a partially steric cross section of FIG. **87**;

FIG. **90** illustrates a partially steric cross section of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **91** illustrates a part of a cross section of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **92** illustrates an end view of an LED tube lamp in which the viewing angle is substantially parallel with an axle of an end cap according to an embodiment of the instant disclosure;

FIG. **93** illustrates a radial cross section of an end cap of FIG. **92**;

FIG. **94** illustrates a part of an axial cross section of FIG. **92** along the line C-C';

FIGS. **95** and **96** illustrate a part of axial cross sections of LED tube lamps according to several embodiments of the instant disclosure;

FIG. **97** illustrates a partial view of an LED tube lamp according to an embodiment of the instant disclosure, and some components thereof are transparent;

FIG. **98** illustrates a partial view of an LED tube lamp according to an embodiment of the instant disclosure;

FIG. **99** illustrates a part of a cross section of FIG. **98** along the line D-D', and a light sensor is added;

FIG. **100** illustrates a partial view of a LED light strip and a power supply soldered to each other according to an embodiment of the instant disclosure; and

FIGS. **101** to **103** illustrate diagrams of a soldering process of the LED light strip and the power supply according to an embodiment of the instant disclosure.

DETAILED DESCRIPTION

The present disclosure provides a novel LED tube lamp. The present disclosure will now be described in the following embodiments with reference to the drawings. The following descriptions of various embodiments of this invention are presented herein for purpose of illustration and giving examples only. It is not intended to be exhaustive or to be limited to the precise form disclosed. These example embodiments are just that—examples—and many implementations and variations are possible that do not require the details provided herein. It should also be emphasized that the disclosure provides details of alternative examples, but such listing of alternatives is not exhaustive. Furthermore, any consistency of detail between various examples should not be interpreted as requiring such detail—it is impracticable to list every possible variation for every feature described herein. The language of the claims should be referenced in determining the requirements of the invention.

In the drawings, the size and relative sizes of components may be exaggerated for clarity. Like numbers refer to like elements throughout.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items and may be abbreviated as "/".

It will be understood that, although the terms first, second, third etc. may be used herein to describe various elements, components, regions, layers, or steps, these elements, components, regions, layers, and/or steps should not be limited by these terms. Unless the context indicates otherwise, these terms are only used to distinguish one element, component, region, layer, or step from another element, component, region, or step, for example as a naming convention. Thus, a first element, component, region, layer, or step discussed below in one section of the specification could be termed a second element, component, region, layer, or step in another section of the specification or in the claims without departing from the teachings of the present invention. In addition, in certain cases, even if a term is not described using "first," "second," etc., in the specification, it may still be referred to as "first" or "second" in a claim in order to distinguish different claimed elements from each other.

It will be further understood that the terms "comprises" and/or "comprising," or "includes" and/or "including" when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

It will be understood that when an element is referred to as being "connected" or "coupled" to or "on" another element, it can be directly connected or coupled to or on the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., "between" versus "directly between," "adjacent" versus "directly adjacent," etc.). However, the term "contact," as used herein refers to direct contact (i.e., touching) unless the context indicates otherwise.

Embodiments described herein will be described referring to plan views and/or cross-sectional views by way of ideal schematic views. Accordingly, the exemplary views may be modified depending on manufacturing technologies and/or tolerances. Therefore, the disclosed embodiments are not limited to those shown in the views, but include modifications in configuration formed on the basis of manufacturing processes. Therefore, regions exemplified in figures may have schematic properties, and shapes of regions shown in figures may exemplify specific shapes of regions of elements to which aspects of the invention are not limited.

Spatially relative terms, such as "beneath," "below," "lower," "above," "upper" and the like, may be used herein for ease of description to describe one element's or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

Terms such as "same," "equal," "planar," or "coplanar," as used herein when referring to orientation, layout, location, shapes, sizes, amounts, or other measures do not necessarily mean an exactly identical orientation, layout, location, shape, size, amount, or other measure, but are intended to encompass nearly identical orientation, layout, location, shapes, sizes, amounts, or other measures within acceptable variations that may occur, for example, due to manufacturing processes. The term "substantially" may be used herein to reflect this meaning.

Terms such as "about" or "approximately" may reflect sizes, orientations, or layouts that vary only in a small relative manner, and/or in a way that does not significantly alter the operation, functionality, or structure of certain elements. For example, a range from "about 0.1 to about 1" may encompass a range such as a 0%-5% deviation around 0.1 and a 0% to 5% deviation around 1, especially if such deviation maintains the same effect as the listed range.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and/or the present application, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

As used herein, items described as being "electrically connected" are configured such that an electrical signal can be passed from one item to the other. Therefore, a passive electrically conductive component (e.g., a wire, pad, internal electrical line, etc.) physically connected to a passive electrically insulative component (e.g., a prepreg layer of a printed circuit board, an electrically insulative adhesive connecting two devices, an electrically insulative underf ill or mold layer, etc.) is not electrically connected to that component. Moreover, items that are "directly electrically connected," to each other are electrically connected through one or more passive elements, such as, for example, wires, pads, internal electrical lines, resistors, etc. As such, directly electrically connected components do not include components electrically connected through active elements, such as transistors or diodes.

Components described as thermally connected or in thermal communication are arranged such that heat will follow a path between the components to allow the heat to transfer from the first component to the second component. Simply because two components are part of the same device or board does not make them thermally connected. In general, components which are heat-conductive and directly connected to other heat-conductive or heat-generating components (or connected to those components through intermediate heat-conductive components or in such close proximity as to permit a substantial transfer of heat) will be described as thermally connected to those components, or in thermal communication with those components. On the contrary, two components with heat-insulative materials therebetween, which materials significantly prevent heat transfer between the two components, or only allow for incidental heat transfer, are not described as thermally connected or in thermal communication with each other. The terms "heat-conductive" or "thermally-conductive" do not apply to any material that provides incidental heat conduction, but are intended to refer to materials that are typically known as good heat conductors or known to have utility for transferring heat, or components having similar heat conducting properties as those materials.

Referring to FIGS. **1**, **1**A, **1**B and **2**, an LED tube lamp of one embodiment of the present invention includes a lamp tube **1**, an LED light strip **2** disposed inside the lamp tube **1**, and two end caps **3** respectively disposed at two ends of the lamp tube **1**. The lamp tube **1** may be made of plastic or glass. The lengths of the two end caps **3** may be same or different. Referring to FIG. **1**A, the length of one end cap may in some embodiments be about 30% to about 80% times the length of the other end cap.

In one embodiment, the lamp tube **1** is made of glass with strengthened or tempered structure to avoid being easily broken and incurring electrical shock occurred to conventional glass made tube lamps, and to avoid the fast aging process that often occurs in plastic made tube lamps. The glass made lamp tube **1** may be additionally strengthened or tempered by a chemical tempering method or a physical tempering method in various embodiments of the present invention.

An exemplary chemical tempering method is accomplished by exchanging the Na ions or K ions on the glass surface with other alkali metal ions and therefore changes composition of the glass surface. The sodium (Na) ions or potassium (K) ions and other alkali metal ions on the glass surface are exchanged to form an ion exchange layer on the glass surface. The glass is then under tension on the inside while under compression on the outside when cooled to room temperature, so as to achieve the purpose of increased strength. The chemical tempering method includes but is not limited to the following glass tempering methods: high temperature type ion exchange method, the low temperature type ion exchange method, dealkalization, surface crystallization, and/or sodium silicate strengthening methods, further explained as follows.

An exemplary embodiment of the high temperature type ion exchange method includes the following steps: Inserting glass containing sodium oxide (Na_2O) or potassium oxide (K_2O) in the temperature range of the softening point and glass transition point into molten salt of lithium, so that the Na ions in the glass are exchanged for Li ions in the molten salt. Later, the glass is then cooled to room temperature, since the surface layer containing Li ions has a different expansion coefficient with respect to the inner layer containing Na ions or K ions, thus the surface produces residual stress and is reinforced. Meanwhile, the glass containing Al_2O_3, TiO_2 and other components, by performing ion exchange, can produce glass crystals having an extremely low coefficient of expansion. The crystallized glass surface after cooling produces a significant amount of pressure, up to 700 MPa, which can enhance the strength of glass.

An exemplary embodiment of the low-temperature ion exchange method includes the following steps: First, a monovalent cation (e.g., K ions) undergoes ion exchange with the alkali ions (e.g. Na ion) on the surface layer at a temperature range that is lower than the strain point temperature, so as to allow the K ions to penetrate the surface. For example, for manufacturing a $Na_2O+CaO+SiO_2$ system glass, the glass can be impregnated for ten hours at more than four hundred degrees in the molten salt. The low temperature ion exchange method can easily obtain glass of higher strength, and the processing method is simple, does not damage the transparent nature of the glass surface, and does not undergo shape distortion.

An exemplary embodiment of dealkalization includes treating glass using platinum (Pt) catalyst along with sulfurous acid gas and water in a high temperature atmosphere. The Na^+ ions are migrated out and bleed from the glass surface to be reacted with the Pt catalyst, so that the surface layer becomes a SiO_2 enriched layer, which results in a low expansion glass and produces compressive stress upon cooling.

The surface crystallization method and the high temperature type ion exchange method are different, but only the surface layer is treated by heat treatment to form low expansion coefficient microcrystals on the glass surface, thus reinforcing the glass.

An exemplary embodiment of the sodium silicate glass strengthening method is a tempering method using sodium silicate (water glass) in water solution at 100 degrees Celsius and several atmospheres of pressure treatment, where a stronger/higher strength glass surface that is harder to scratch is thereby produced.

An exemplary embodiment of the physical tempering method includes but is not limited to applying a coating to or changing the structure of an object such as to strengthen the easily broken position. The applied coating can be, for example, a ceramic coating, an acrylic coating, or a glass coating depending on the material used. The coating can be performed in a liquid phase or gaseous phase.

The above glass tempering methods described including physical tempering methods and chemical tempering methods can be accomplished singly or combined together in any fashion.

Referring to FIG. **1**B and FIG. **15**, a glass made lamp tube of an LED tube lamp according to one embodiment of the present invention has structure-strengthened end regions described as follows. The glass made lamp tube **1** includes a main body region **102**, two rear end regions **101** (or just end regions **101**) respectively formed at two ends of the main body region **102**, and end caps **3** that respectively sleeve the rear end regions **101**. The outer diameter of at least one of the rear end regions **101** is less than the outer diameter of the main body region **102**. In the embodiment of FIGS. **1**B and **15**, the outer diameters of the two rear end regions **101** are less than the outer diameter of the main body region **102**. In addition, the surface of the rear end region **101** is in parallel with the surface of the main body region **102** in a cross-sectional view. Specifically, the glass made lamp tube **1** is strengthened at both ends, such that the rear end regions **101** are formed to be strengthened structures. In certain embodiments, the rear end regions **101** with strengthened structure are respectively sleeved with the end caps **3**, and the outer diameters of the end caps **3** and the main body region **102** have little or no differences. For example, the end caps **3** may have the same or substantially the same outer diameters as that of the main body region **102** such that there is no gap between the end caps **3** and the main body region **102**. In this way, a supporting seat in a packing box for transportation of the LED tube lamp contacts not only the end caps **3** but also the lamp tube **1** and makes uniform the loadings on the entire LED tube lamp to avoid situations where only the end caps **3** are forced, therefore preventing breakage at the connecting portion between the end caps **3** and the rear end regions **101** due to stress concentration. The quality and the appearance of the product are therefore improved.

In one embodiment, the end caps **3** and the main body region **102** have substantially the same outer diameters. These diameters may have a tolerance for example within +/−0.2 millimeter (mm), or in some cases up to +/−1.0 millimeter (mm). Depending on the thickness of the end caps **3**, the difference between an outer diameter of the rear end regions **101** and an outer diameter of the main body region **102** can be about 1 mm to about 10 mm for typical product applications. In some embodiments, the difference between the outer diameter of the rear end regions **101** and the outer diameter of the main body region **102** can be about 2 mm to about 7 mm.

Referring to FIG. **2**, the LED tube lamp **1** may have a heat shrink sleeve **190** covering on the outer surface of the lamp tube **1**. In some embodiments, the heat shrink sleeve **190** may have a thickness ranging between 20 μm and 200 μm and is substantially transparent with respect to the wavelength of light from the LED light sources **202**. In some embodiments, the heat shrink sleeve **190** may be made of PFA (perfluoroalkoxy) or PTFE (polytetrafluoroethylene). The heat shrink sleeve **190** may be slightly larger than the lamp tube **1**, and may be shrunk and tightly cover the outer surface of the lamp tube **1** while being heated to an appropriate temperature (ex, 260° C. for PFA and PTFE).

Referring to FIG. **15**, the lamp tube **1** is further formed with a transition region **103** between the main body region **102** and the rear end regions **101**. In one embodiment, the transition region **103** is a curved region formed to have cambers at two ends to smoothly connect the main body region **102** and the rear end regions **101**, respectively. For example, the two ends of the transition region **103** may be arc-shaped in a cross-section view along the axial direction of the lamp tube **1**. Furthermore, one of the cambers connects the main body region **102** while the other one of the cambers connects the rear end region **101**. In some embodiments, the arc angle of the cambers is greater than 90 degrees while the outer surface of the rear end region **101** is a continuous surface in parallel with the outer surface of the main body region **102** when viewed from the cross-section along the axial direction of the lamp tube. In other embodiments, the transition region **103** can be without curve or arc in shape. In certain embodiments, the length of the transition region **103** along the axial direction of the lamp tube **1** is between about 1 mm to about 4 mm. Upon experimentation, it was found that when the length of the transition region **103** along the axial direction of the lamp tube **1** is less than 1 mm, the strength of the transition region would be insufficient; when the length of the transition region **103** along the axial direction of the lamp tube **1** is more than 4 mm, the main body region **102** would be shorter and the desired illumination surface would be reduced, and the end caps **3** would be longer and the more materials for the end caps **3** would be needed.

Referring to FIG. **5** and FIG. **16**, in certain embodiments, the lamp tube **1** is made of glass, and has a rear end region **101**, a main body region **102**, and a transition region **103**. The transition region **103** has two arc-shaped cambers at both ends to from an S shape; one camber positioned near the main body region **102** is convex outwardly, while the other camber positioned near the rear end region **101** is concaved inwardly. Generally speaking, the radius of curvature, R**1**, of the camber/arc between the transition region **103** and the main body region **102** is smaller than the radius of curvature, R**2**, of the camber/arc between the transition region **103** and the rear end region **101**. The ratio R**1**:R**2** may range, for example, from about 1:1.5 to about 1:10, and in some embodiments is more effective from about 1:2.5 to about 1:5, and in some embodiments is even more effective from about 1:3 to about 1:4. In this way, the camber/arc of the transition region **103** positioned near the rear end region **101** is in compression at outer surfaces and in tension at inner surfaces, and the camber/arc of the transition region **103** positioned near the main body region **102** is in tension at outer surfaces and in compression at inner surfaces. Therefore, the goal of strengthening the transition region **103** of the lamp tube **1** is achieved.

Taking the standard specification for T**8** lamp as an example, the outer diameter of the rear end region **101** is configured between 20.9 mm to 23 mm. An outer diameter of the rear end region **101** is less than 20.9 mm would be too small to fittingly insert the power supply into the lamp tube **1**. The outer diameter of the main body region **102** is in some embodiments configured to be between about 25 mm to about 28 mm. An outer diameter of the main body region

102 being less than 25 mm would be inconvenient to strengthen the ends of the main body region **102** as far as the current manufacturing skills are concerned, while an outer diameter of the main body region **102** being greater than 28 mm is not compliant to the industrial standard.

Referring to FIGS. **3** and **4**, in one embodiment of the invention, each end cap **3** includes an electrically insulating tube **302**, a thermal conductive member **303** sleeving over the electrically insulating tube **302**, and two hollow conductive pins **301** disposed on the electrically insulating tube **302**. The thermal conductive member **303** can be a metal ring that is tubular in shape.

Referring FIG. **5**, in one embodiment, one end of the thermal conductive member **303** extends away from the electrically insulating tube **302** of the end cap **3** and towards one end of the lamp tube **1**, and is bonded and adhered to the end of the lamp tube **1** using a hot melt adhesive **6**. In this way, the end cap **3** by way of the thermal conductive member **303** extends to the transition region **103** of the lamp tube **1**. In one embodiment, the thermal conductive member **303** and the transition region **103** are closely connected such that the hot melt adhesive **6** would not overflow out of the end cap **3** and remain on the main body region **102** when using the hot melt adhesive **6** to join the thermal conductive member **303** and the lamp tube **1**. In addition, the electrically insulating tube **302** facing toward the lamp tube **1** does not have an end extending to the transition region **103**, and that there is a gap between the electrically insulating tube **302** and the transition region **103**. In one embodiment, the electrically insulating tube **302** is not limited to being made of plastic or ceramic, any material that is not a good electrical conductor can be used.

The hot melt adhesive **6** is a composite including a so-called commonly known as "welding mud powder", and in some embodiments includes one or more of phenolic resin 2127#, shellac, rosin, calcium carbonate powder, zinc oxide, and ethanol. Rosin is a thickening agent with a feature of being dissolved in ethanol but not dissolved in water. In one embodiment, a hot melt adhesive **6** having rosin could be expanded to change its physical status to become solidified when being heated to high temperature in addition to the intrinsic viscosity. Therefore, the end cap **3** and the lamp tubel can be adhered closely by using the hot melt adhesive to accomplish automatic manufacture for the LED tube lamps. In one embodiment, the hot melt adhesive **6** may be expansive and flowing and finally solidified after cooling. In this embodiment, the volume of the hot melt adhesive **6** expands to about 1.3 times the original size when heated from room temperature to about 200 to 250 degrees Celsius. The hot melt adhesive **6** is not limited to the materials recited herein. Alternatively, a material for the hot melt adhesive **6** to be solidified immediately when heated to a predetermined temperature can be used. The hot melt adhesive **6** provided in each embodiments of the present invention is durable with respect to high temperature inside the end caps **3** due to the heat resulted from the power supply. Therefore, the lamp tube **1** and the end caps **3** could be secured to each other without decreasing the reliability of the LED tube lamp.

Furthermore, there is formed an accommodation space between the inner surface of the thermal conductive member **303** and the outer surface of the lamp tube **1** to accommodate the hot melt adhesive **6**, as indicated by the dotted line B in FIG. **5**. For example, the hot melt adhesive **6** can be filled into the accommodation space at a location where a first hypothetical plane (as indicated by the dotted line B in FIG. **5**) being perpendicular to the axial direction of the lamp tube **1** would pass through the thermal conductive member, the hot melt adhesive **6**, and the outer surface of the lamp tube **1**. The hot melt adhesive **6** may have a thickness, for example, of about 0.2 mm to about 0.5 mm. In one embodiment, the hot melt adhesive **6** will be expansive to solidify in and connect with the lamp tube **1** and the end cap **3** to secure both. The transition region **103** brings a height difference between the rear end region **101** and the main body region **102** to avoid the hot melt adhesives **6** being overflowed onto the main body region **102**, and thereby saves manpower to remove the overflowed adhesive and increase the LED tube lamp productivity. The hot melt adhesive **6** is heated by receiving heat from the thermal conductive member **303** to which an electricity from an external heating equipment is applied, and then expands and finally solidifies after cooling, such that the end caps **3** are adhered to the lamp tube **1**.

Referring to FIG. **5**, in one embodiment, the electrically insulating tube **302** of the end cap **3** includes a first tubular part **302***a* and a second tubular part **302***b* connected along an axial direction of the lamp tube **1**. The outer diameter of the second tubular part **302***b* is less than the outer diameter of the first tubular part **302***a*. In some embodiments, the outer diameter difference between the first tubular part **302***a* and the second tubular part **302***b* is between about 0.15 mm and about 0.30 mm. The thermal conductive member **303** sleeves over the outer circumferential surface of the second tubular part **302***b*. The outer surface of the thermal conductive member **303** is coplanar or substantially flush with respect to the outer circumferential surface of the first tubular part **302***a*. For example, the thermal conductive member **303** and the first tubular part **302***a* have substantially uniform exterior diameters from end to end. As a result, the entire end cap **3** and thus the entire LED tube lamp may be smooth with respect to the outer appearance and may have a substantially uniform tubular outer surface, such that the loading during transportation on the entire LED tube lamp is also uniform. In one embodiment, a ratio of the length of the thermal conductive member **303** along the axial direction of the end cap **3** to the axial length of the electrically insulating tube **302** ranges from about 1:2.5 to about 1:5.

In one embodiment, for sake of secure adhesion between the end cap **3** and the lamp tube **1**, the second tubular part **302***b* is at least partially disposed around the lamp tube **1**, and the accommodation space further includes a space encompassed by the inner surface of the second tubular part **302***b* and the outer surface of the rear end region **101** of the lamp tube **1**. The hot melt adhesive **6** is at least partially filled in an overlapped region (shown by a dotted line "A" in FIG. **5**) between the inner surface of the second tubular part **302***b* and the outer surface of the rear end region **101** of the lamp tube **1**. For example, the hot melt adhesive **6** may be filled into the accommodation space at a location where a second hypothetical plane (shown by the dotted line A in FIG. **5**) being perpendicular to the axial direction of the lamp tube **1** would pass through the thermal conductive member **303**, the second tubular part **302***b*, the hot melt adhesive **6**, and the rear end region **101**.

The hot melt adhesive **6** is not required to completely fill the entire accommodation space as shown in FIG. **5**, especially where a gap is reserved or formed between the thermal conductive member **303** and the second tubular part **302***b*. For example, in some embodiments, the hot melt adhesive **6** can be only partially filled into the accommodation space. During manufacturing of the LED tube lamp, the amount of the hot melt adhesive **6** coated and applied between the thermal conductive member **303** and the rear end region **101**

may be appropriately increased, such that in the subsequent heating process, the hot melt adhesive **6** can be caused to expand and flow in between the second tubular part **302***b* and the rear end region **101**, and thereby solidify after cooling to join the second tubular part **302***b* and the rear end region **101**.

During fabrication of the LED tube lamp, the rear end region **101** of the lamp tube **1** is inserted into one of the end caps **3**. In some embodiments, the axial length of the inserted portion of the rear end region **101** of the lamp tube **1** accounts for approximately one-third (⅓) to two-thirds (⅔) of the total axial length of the thermal conductive member **303**. One benefit is that, there will be sufficient creepage distance between the hollow conductive pins **301** and the thermal conductive member **303**, and thus it is not easy to form a short circuit leading to dangerous electric shock to individuals. On the other hand, the creepage distance between the hollow conductive pin **301** and the thermal conductive member **303** is increased due to the electrically insulating effect of the electrically insulating tube **302**, and thus a high voltage test is more likely to pass without causing electrical shocks to people.

Furthermore, the presence of the second tubular part **302***b* interposed between the hot melt adhesive **6** and the thermal conductive member **303** may reduce the heat from the thermal conductive member **303** to the hot melt adhesive **6**. To help prevent or minimize this problem, referring to FIG. **4** in one embodiment, the end of the second tubular part **302***b* facing the lamp tube **1** (i.e., away from the first tubular part **302***a*) is circumferentially provided with a plurality of notches **302***c*. These notches **302***c* help to increase the contact areas between the thermal conductive member **303** and the hot melt adhesive **6** and therefore provide rapid heat conduction from the thermal conductive member **303** to the hot melt adhesive **6** so as to accelerate the solidification of the hot melt adhesive **6**. Moreover, the hot melt adhesive **6** electrically insulates the thermal conductive member **303** and the lamp tube **1** so that a user would not be electrically shocked when he touches the thermal conductive member **303** connected to a broken lamp tube **1**.

The thermal conductive member **303** can be made of various heat conducting materials. The thermal conductive member **303** can be a metal sheet such as an aluminum alloy. The thermal conductive member **303** sleeves the second tubular part **302***b* and can be tubular or ring-shaped. The electrically insulating tube **302** may be made of electrically insulating material, but in some embodiments have low thermal conductivity so as to prevent the heat from reaching the power supply module located inside the end cap **3** and therefore negatively affecting performance of the power supply module. In one embodiment, the electrically insulating tube **302** is a plastic tube.

Alternatively, the thermal conductive member **303** may be formed by a plurality of metal plates circumferentially arranged on the tubular part **302***b* with either an equidistant space or a non-equidistant space.

The end cap **3** may be designed to have other kinds of structures or include other elements. Referring to FIG. **6**, the end cap **3** according to another embodiment further includes a magnetic metal member **9** within the electrically insulating tube **302** but excludes the thermal conductive member **3**. The magnetic metal member **9** is fixedly arranged on the inner circumferential surface of the electrically insulating tube **302** and therefore interposed between the electrically insulating tube **302** and the lamp tube **1** such that the magnetic metal member **9** is partially overlapped with the lamp tube **1** in the radial direction. In this embodiment, the whole magnetic metal member **9** is inside the electrically insulating tube **302**, and the hot melt adhesive **6** is coated on the inner surface of the magnetic metal member **9** (the surface of the magnetic metal tube member **9** facing the lamp tube **1**) and adhered to the outer peripheral surface of the lamp tube **1**. In some embodiments, the hot melt adhesive **6** covers the entire inner surface of the magnetic metal member **9** in order to increase the adhesion area and to improve the stability of the adhesion.

Referring to FIG. **7**, when manufacturing the LED tube lamp of this embodiment, the electrically insulating tube **302** is inserted in an external heating equipment which is in some embodiments an induction coil **11**, so that the induction coil **11** and the magnetic metal member **9** are disposed opposite (or adjacent) to one another along the radially extending direction of the electrically insulating tube **302**. The induction coil **11** is energized and forms an electromagnetic field, and the electromagnetic field induces the magnetic metal member **9** to create an electrical current and become heated. The heat from the magnetic metal member **9** is transferred to the hot melt adhesive **6** to make the hot melt adhesive **6** expansive and flowing and then solidified after cooling, and the bonding for the end cap **3** and the lamp tube **1** can be accomplished. The induction coil **11** may be made, for example, of red copper and composed of metal wires having width of, for example, about 5 mm to about 6 mm to be a circular coil with a diameter, for example, of about 30 mm to about 35 mm, which is a bit greater than the outer diameter of the end cap **3**. Since the end cap **3** and the lamp tube **1** may have the same outer diameters, the outer diameter may change depending on the outer diameter of the lamp tube **1**, and therefore the diameter of the induction coil **11** used can be changed depending on the type of the lamp tube **1** used. As examples, the outer diameters of the lamp tube for T12, T10, T8, T5, T4, and T2 are 38.1 mm, 31.8 mm, 25.4 mm, 16 mm, 12.7 mm, and 6.4 mm, respectively.

Furthermore, the induction coil **11** may be provided with a power amplifying unit to increase the alternating current power to about 1 to 2 times the original. In some embodiments, it is better that the induction coil **11** and the electrically insulating tube **302** are coaxially aligned to make energy transfer more uniform. In some embodiments, a deviation value between the axes of the induction coil **11** and the electrically insulating tube **302** is not greater than about 0.05 mm. When the bonding process is complete, the end cap **3** and the lamp tube **1** are moved away from the induction coil. Then, the hot melt adhesive **6** absorbs the energy to be expansive and flowing and solidified after cooling. In one embodiment, the magnetic metal member **9** can be heated to a temperature of about 250 to about 300 degrees Celsius; the hot melt adhesive **6** can be heated to a temperature of about 200 to about 250 degrees Celsius. The material of the hot melt adhesive is not limited here, and a material of allowing the hot melt adhesive to immediately solidify when absorb heat energy can also be used.

In one embodiment, the induction coil **11** may be fixed in position to allow the end cap **3** and the lamp tube **1** to be moved into the induction coil **11** such that the hot melt adhesive **6** is heated to expand and flow and then solidify after cooling when the end cap **3** is again moved away from the induction coil **11**. Alternatively, the end cap **3** and the lamp tube **1** may be fixed in position to allow the induction coil **11** to be moved to encompass the end cap **3** such that the hot melt adhesive **6** is heated to expand and flow and then solidify after cooling when the induction coil **11** is again moved away from the end cap **3**. In one embodiment, the external heating equipment for heating the magnetic metal

member **9** is provided with a plurality of devices the same as the induction coils **11**, and the external heating equipment moves relative to the end cap **3** and the lamp tube **1** during the heating process. In this way, the external heating equipment moves away from the end cap **3** when the heating process is completed. However, the length of the lamp tube **1** is far greater than the length of the end cap **3** and may be up to above 240 cm in some special appliances, and this may cause bad connection between the end cap **3** and the lamp tube **1** during the process that the lamp tube **1** accompany with the end cap **3** to relatively enter or leave the induction coil **11** in the back and for the direction as mentioned above when a position error exists.

Referring to FIG. **44**, an external heating equipment **110** having a plurality sets of upper and lower semicircular fixtures **11***a* is provided to achieve same heating effect as that brought by the induction coils **11**. In this way, the above-mentioned damage risk due to the relative movement in back-and-forth direction can be reduced. The upper and lower semicircular fixtures **11***a* each has a semicircular coil made by winding a metal wire of, for example, about 5 mm to about 6 mm wide. The combination of the upper and lower semicircular fixtures form a ring with a diameter, for example, of about 30 mm to about 35 mm, and the inside semicircular coils form a closed loop to become the induction coil **11** as mentioned. In this embodiment, the end cap **3** and the lamp tube **1** do not relatively move in the back-and-forth manner, but roll into the notch of the lower semicircular fixture. Specifically, an end cap **3** accompanied with a lamp tube **1** initially roll on a production line, and then the end cap **3** rolls into the notch of a lower semicircular fixture, and then the upper and the lower semicircular fixtures are combined to form a closed loop, and the fixtures are detached when heating is completed. This method reduces the need for high position precision and yield problems in production.

Referring to FIG. **6**, the electrically insulating tube **302** is further divided into two parts, namely a first tubular part **302***d* and a second tubular part **302***e*, i.e. the remaining part. In order to provide better support of the magnetic metal member **9**, an inner diameter of the first tubular part **302***d* for supporting the magnetic metal member **9** is larger than the inner diameter of the second tubular part **302***e* which does not have the magnetic metal member **9**, and a stepped structure is formed at the connection of the first tubular part **302***d* and the second tubular part **302***e*. In this way, an end of the magnetic metal member **9** as viewed in an axial direction is abutted against the stepped structure such that the entire inner surface of the end cap is smooth and plain. Additionally, the magnetic metal member **9** may be of various shapes, e.g., a sheet-like or tubular-like structure being circumferentially arranged or the like, where the magnetic metal member **9** is coaxially arranged with the electrically insulating tube **302**.

Referring to FIGS. **8** and **9**, the electrically insulating tube may be further formed with a supporting portion **313** on the inner surface of the electrically insulating tube **302** to be extending inwardly such that the magnetic metal member **9** is axially abutted against the upper edge of the supporting portion **313**. In some embodiments, the thickness of the supporting portion **313** along the radial direction of the electrically insulating tube **302** is between 1 mm to 2 mm. The electrically insulating tube **302** may be further formed with a protruding portion **310** on the inner surface of the electrically insulating tube **302** to be extending inwardly such that the magnetic metal member **9** is radially abutted against the side edge of the protruding portion **310** and that the outer surface of the magnetic metal member **9** and the inner surface of the electrically insulating tube **302** is spaced apart with a gap. The thickness of the protruding portion **310** along the radial direction of the electrically insulating tube **302** is less than the thickness of the supporting portion **313** along the radial direction of the electrically insulating tube **302** and in some embodiments be 0.2 mm to 1 mm in an embodiment.

Referring to FIG. **9**, the protruding portion **310** and the supporting portion are connected along the axial direction, and the magnetic metal member **9** is axially abutted against the upper edge of the supporting portion **313** while radially abutted against the side edge of the protruding portion **310** such that at least part of the protruding portion **310** intervenes between the magnetic metal member **9** and the electrically insulating tube **302**. The protruding portion **310** may be arranged along the circumferential direction of the electrically insulating tube **302** to have a circular configuration. Alternatively, the protruding portion **310** may be in the form of a plurality of bumps arranged on the inner surface of the electrically insulating tube **302**. The bumps may be equidistantly or non-equidistantly arranged along the inner circumferential surface of the electrically insulating tube **302** as long as the outer surface of the magnetic metal member **9** and the inner surface of the electrically insulating tube **302** are in a minimum contact and simultaneously hold the hot melt adhesive **6**. In other embodiments, an entirely metal made end cap **3** could be used with an insulator disposed under the hollow conductive pin to endure the high voltage.

Referring to FIG. **10**, in one embodiment, the magnetic metal member **9** can have one or more openings **91** that are circular. However, the openings **91** may instead be, for example, oval, square, star shaped, etc., as long as the contact area between the magnetic metal member **9** and the inner peripheral surface of the electrically insulating tube **302** can be reduced and the function of the magnetic metal member **9** to heat the hot melt adhesive **6** can be performed. In some embodiments, the openings **91** occupy about 10% to about 50% of the surface area of the magnetic metal member **9**. The opening **91** can be arranged circumferentially on the magnetic metal member **9** in an equidistantly spaced or non-equidistantly spaced manner.

Referring to FIG. **11**, in other embodiments, the magnetic metal member **9** has an indentation/embossment **93** on surface facing the electrically insulating tube **302**. The embossment is raised from the inner surface of the magnetic metal member **9**, while the indentation is depressed under the inner surface of the magnetic metal member **9**. The indentation/embossment reduces the contact area between the inner peripheral surface of the electrically insulating tube **302** and the outer surface of the magnetic metal member **9** while maintaining the function of melting and curing the hot melt adhesive **6**. In sum, the surface of the magnetic metal member **9** can be configured to have openings, indentations, or embossments or any combination thereof to achieve the goal of reducing the contact area between the inner peripheral surface of the electrically insulating tube **302** and the outer surface of the magnetic metal member **9**. At the same time, the firm adhesion between the magnetic metal member **9** and the lamp tube **1** should be secured to accomplish the heating and solidification of the hot melt adhesive **6**.

Referring to FIG. **12**, in one embodiment, the magnetic metal member **9** is a circular ring. Referring to FIG. **13**, in another embodiment, the magnetic metal member **9** is a non-circular ring such as but not limited to an oval ring. When the magnetic metal member **9** is an oval ring, the minor axis of the oval ring is slightly larger than the outer

diameter of the end region of the lamp tube **1** such that the contact area of the inner peripheral surface of the electrically insulating tube **302** and the outer surface of the magnetic metal member **9** is reduced and the function of melting and curing the hot melt adhesive **6** still performs properly. For example, the inner surface of the electrically insulating tube **302** may be formed with supporting portion **313** and the magnetic metal member **9** in a non-circular ring shape is seated on the supporting portion **313**. Thus, the contact area of the outer surface of the magnetic metal member **9** and the inner surface of the electrically insulating tube **302** could be reduced while that the function of solidifying the hot melt adhesive **6** could be performed. In other embodiments, the magnetic metal member **9** can be disposed on the outer surface of the end cap **3** to replace the thermal conductive member **303** as shown in FIG. **5** and to perform the function of heating and solidifying the hot melt adhesive **6** via electromagnetic induction.

Referring to FIGS. **45** to **47**, in other embodiments, the magnetic metal member **9** may be omitted. Instead, in some embodiments, the hot melt adhesive **6** has a predetermined proportion of high permeability powders **65** having relative permeability ranging, for example, from about 10^2 to about 10^6. The powders can be used to replace the calcite powders originally included in the hot melt adhesive **6**, and in certain embodiments, a volume ratio of the high permeability powders **65** to the calcite powders may be about 1:3~1:1. In some embodiments, the material of the high permeability powders **65** is one of iron, nickel, cobalt, alloy thereof, or any combination thereof; the weight percentage of the high permeability powders **65** with respect to the hot melt adhesive is about 10% to about 50%; and/or the powders may have mean particle size of about 1 to about 30 micrometers. Such a hot melt adhesive **6** allows the end cap **3** and the lamp tube **1** to adhere together and be qualified in a destruction test, a torque test, and a bending test. Generally speaking, the bending test standard for the end cap of the LED tube lamp is greater than 5 newton-meters (Nt-m), while the torque test standard is greater than 1.5 newton-meters (Nt-m). In one embodiment, upon the ratio of the high permeability powders **65** to the hot melt adhesive **6** and the magnetic flux applied, the end cap **3** and the end of the lamp tube **1** secured by using the hot melt adhesive **6** are qualified in a torque test of 1.5 to 5 newton-meters (Nt-m) and a bending test of 5 to 10 newton-meters (Nt-m). The induction coil **11** is first switched on and allow the high permeability powders uniformly distributed in the hot melt adhesive **6** to be charged, and therefore allow the hot melt adhesive **6** to be heated to be expansive and flowing and then solidified after cooling. Thereby, the goal of adhering the end cap **3** onto the lamp tube **1** is achieved.

Referring to FIGS. **45** to **47**, the high permeability powders **65** may have different distribution manners in the hot melt adhesive **6**. As shown in FIG. **45**, the high permeability powders **65** have mean particle size of about 1 to about 5 micrometers, and are distributed uniformly in the hot melt adhesive **6**. When such a hot melt adhesive **6** is coated on the inner surface of the end cap **3**, though the high permeability powders **65** cannot form a closed loop due to the uniform distribution, they can still be heated due to magnetic hysteresis in the electromagnetic field, so as to heat the hot melt adhesive **6**. As shown in FIG. **46**, the high permeability powders **65** have mean particle size of about 1 to about 5 micrometers, and are distributed randomly in the hot melt adhesive **6**. When such a hot melt adhesive **6** is coated on the inner surface of the end cap **3**, the high permeability powders **65** form a closed loop due to the random distribution; they can be heated due to magnetic hysteresis or the closed loop in the electromagnetic field, so as to heat the hot melt adhesive **6**. As shown in FIG. **47**, the high permeability powders **65** have mean particle size of about 5 to about 30 micrometers, and are distributed randomly in the hot melt adhesive **6**. When such a hot melt adhesive **6** is coated on the inner surface of the end cap **3**, the high permeability powders **65** form a closed loop due to the random distribution; they can be heated due to magnetic hysteresis or the closed loop in the electromagnetic field, so as to heat the hot melt adhesive **6**. Accordingly, depending on the adjustment of the particle size, the distribution density and the distribution manner of the high permeability powders **65**, and the electromagnetic flux applied to the end cap **3**, the heating temperature of the hot melt adhesive **6** can be controlled. In one embodiment, the hot melt adhesive **6** is flowing and solidified after cooling from a temperature of about 200 to about 250 degrees Celsius. In another embodiment, the hot melt adhesive **6** is immediately solidified at a temperature of about 200 to about 250 degrees Celsius.

Referring to FIGS. **14** and **39**, in one embodiment, an end cap **3'** has a pillar **312** at one end, the top end of the pillar **312** is provided with an opening having a groove **314** of, for example 0.1±1% mm depth at the periphery thereof for positioning a conductive lead **53** as shown in FIG. **39**. The conductive lead **53** passes through the opening on top of the pillar **312** and has its end bent to be disposed in the groove **314**. After that, a conductive metallic cap **311** covers the pillar **312** such that the conductive lead **53** is fixed between the pillar **312** and the conductive metallic cap **311**. In some embodiments, the inner diameter of the conductive metallic cap **311** is 7.56±5% mm, the outer diameter of the pillar **312** is 7.23±5% mm, and the outer diameter of the conductive lead **53** is 0.5±1% mm. Nevertheless, the mentioned sizes are not limited here once that the conductive metallic cap **311** closely covers the pillar **312** without using extra adhesives and therefore completes the electrical connection between the power supply **5** and the conductive metallic cap **311**.

Referring to FIGS. **1**B, **3**, **12**, and **13**, in one embodiment, the end cap **3** may have openings **304** to dissipate heat generated by the power supply modules inside the end cap **3** so as to prevent a high temperature condition inside the end cap **3** that might reduce reliability. In some embodiments, the openings are in a shape of an arc; especially in a shape of three arcs with different length. In one embodiment, the openings are in a shape of three arcs with gradually varying length. The openings on the end cap **3** can be in any one of the above-mentioned shape or any combination thereof.

In other embodiments, the end cap **3** is provided with a socket (not shown) for installing the power supply module.

Referring to FIG. **17**, in one embodiment, the lamp tube **1** further has a diffusion film **13** coated and bonded to the inner surface thereof so that the light outputted or emitted from the LED light sources **202** is diffused by the diffusion film **13** and then pass through the lamp tube **1**. The diffusion film **13** can be in form of various types, such as a coating onto the inner surface or outer wall of the lamp tube **1**, or a diffusion coating layer (not shown) coated at the surface of each LED light source **202**, or a separate membrane covering the LED light source **202**.

Referring again to FIG. **17**, in one embodiment, when the diffusion film **13** is in the form of a sheet, it covers but is not in contact with the LED light sources **202**. The diffusion film **13** in the form of a sheet is usually called an optical diffusion sheet or board, usually a composite made of mixing diffu-

sion particles into polystyrene (PS), polymethyl methacrylate (PMMA), polyethylene terephthalate (PET), and/or polycarbonate (PC), and/or any combination thereof. The light passing through such composite is diffused to expand in a wide range of space such as a light emitted from a plane source, and therefore makes the brightness of the LED tube lamp uniform.

In alternative embodiments, the diffusion film **13** is in form of an optical diffusion coating, which is composed of any one of calcium carbonate, halogen calcium phosphate and aluminum oxide, or any combination thereof. When the optical diffusion coating is made from a calcium carbonate with suitable solution, an excellent light diffusion effect and transmittance to exceed 90% can be obtained. Furthermore, the diffusion film **13** in form of an optical diffusion coating may be applied to an outer surface of the rear end region **101** having the hot melt adhesive **6** to produce increased friction resistance between the end cap **3** and the rear end region **101**. Compared with an example without any optical diffusion coating, the rear end region **101** having the diffusion film **13** is beneficial, for example for preventing accidental detachment of the end cap **3** from the lamp tube **1**.

In one embodiment, the composition of the diffusion film **13** in form of the optical diffusion coating includes calcium carbonate, strontium phosphate (e.g., CMS-5000, white powder), thickener, and a ceramic activated carbon (e.g., ceramic activated carbon SW-C, which is a colorless liquid). Specifically, in one example, such an optical diffusion coating on the inner circumferential surface of the glass tube has an average thickness ranging between about 20 and about 30 μm. A light transmittance of the diffusion film **13** using this optical diffusion coating is about 90%. Generally speaking, the light transmittance of the diffusion film **13** ranges from 85% to 96%. In addition, this diffusion film **13** can also provide electrical isolation for reducing risk of electric shock to a user upon breakage of the lamp tube **1**. Furthermore, the diffusion film **13** provides an improved illumination distribution uniformity of the light outputted by the LED light sources **202** such that the light can illuminate the back of the light sources **202** and the side edges of the bendable circuit sheet so as to avoid the formation of dark regions inside the lamp tube **1** and improve the illumination comfort. In another possible embodiment, the light transmittance of the diffusion film can be 92% to 94% while the thickness ranges from about 200 to about 300 μm.

In another embodiment, the optical diffusion coating can also be made of a mixture including a calcium carbonate-based substance, some reflective substances like strontium phosphate or barium sulfate, a thickening agent, ceramic activated carbon, and deionized water. The mixture is coated on the inner circumferential surface of the glass tube and has an average thickness ranging between about 20 and about 30 μm. In view of the diffusion phenomena in microscopic terms, light is reflected by particles. The particle size of the reflective substance such as strontium phosphate or barium sulfate will be much larger than the particle size of the calcium carbonate. Therefore, adding a small amount of reflective substance in the optical diffusion coating can effectively increase the diffusion effect of light.

In other embodiments, halogen calcium phosphate or aluminum oxide can also serve as the main material for forming the diffusion film **13**. The particle size of the calcium carbonate is, for example, about 2 to 4 μm, while the particle size of the halogen calcium phosphate and aluminum oxide are about 4 to 6 μm and 1 to 2 μm, respectively. When the light transmittance is required to be 85% to 92%, the average thickness for the optical diffusion coating mainly having the calcium carbonate may be about 20 to about 30 μm, while the average thickness for the optical diffusion coating mainly having the halogen calcium phosphate may be about 25 to about 35 μm, and/or the average thickness for the optical diffusion coating mainly having the aluminum oxide may be about 10 to about 15 μm. However, when the required light transmittance is up to 92% and even higher, the optical diffusion coating mainly having the calcium carbonate, the halogen calcium phosphate, or the aluminum oxide should be even thinner.

The main material and the corresponding thickness of the optical diffusion coating can be decided according to the place for which the lamp tube **1** is used and the light transmittance required. It is noted that the higher the light transmittance of the diffusion film is required, the more apparent the grainy visual of the light sources is.

Referring to FIG. **17**, the inner circumferential surface of the lamp tube **1** may also be provided or bonded with a reflective film **12**. The reflective film **12** is provided around the LED light sources **202**, and occupies a portion of an area of the inner circumferential surface of the lamp tube **1** arranged along the circumferential direction thereof. As shown in FIG. **17**, the reflective film **12** is disposed at two sides of the LED light strip **2** extending along a circumferential direction of the lamp tube **1**. The LED light strip **2** is basically in a middle position of the lamp tube **1** and between the two reflective films **12**. The reflective film **12**, when viewed by a person looking at the lamp tube from the side (in the X-direction shown in FIG. **17**), serves to block the LED light sources **202**, so that the person does not directly see the LED light sources **202**, thereby reducing the visual graininess effect. On the other hand, that the lights emitted from the LED light sources **202** are reflected by the reflective film **12** facilitates the divergence angle control of the LED tube lamp, so that more lights illuminate toward directions without the reflective film **12**, such that the LED tube lamp has higher energy efficiency when providing the same level of illumination performance.

Specifically, the reflective film **12** is provided on the inner peripheral surface of the lamp tube **1**, and has an opening **12***a* configured to accommodate the LED light strip **2**. The size of the opening **12***a* is the same or slightly larger than the size of the LED light strip **2**. During assembly, the LED light sources **202** are mounted on the LED light strip **2** (a bendable circuit sheet) provided on the inner surface of the lamp tube **1**, and then the reflective film **12** is adhered to the inner surface of the lamp tube **1**, so that the opening **12***a* of the reflective film **12** correspondingly matches the LED light strip **2** in a one-to-one relationship, and the LED light strip **2** is exposed to the outside of the reflective film **12**.

In one embodiment, the reflectance of the reflective film **12** is generally at least greater than 85%, in some embodiments greater than 90%, and in some embodiments greater than 95%, to be most effective. In one embodiment, the reflective film **12** extends circumferentially along the length of the lamp tube **1** occupying about 30% to 50% of the inner surface area of the lamp tube **1**. In other words, a ratio of a circumferential length of the reflective film **12** along the inner circumferential surface of the lamp tube **1** to a circumferential length of the lamp tube **1** is about 0.3 to 0.5. In the illustrated embodiment of FIG. **17**, the reflective film **12** is disposed substantially in the middle along a circumferential direction of the lamp tube **1**, so that the two distinct portions or sections of the reflective film **12** disposed on the two sides of the LED light strip **2** are substantially equal in area. The reflective film **12** may be made of PET with some reflective materials such as strontium phosphate or barium

sulfate or any combination thereof, with a thickness between about 140 μm and about 350 μm or between about 150 μm and about 220 μm for a more preferred effect in some embodiments. As shown in FIG. **18**, in other embodiments, the reflective film **12** may be provided along the circumferential direction of the lamp tube **1** on only one side of the LED light strip **2** while occupying the same percentage of the inner surface area of the lamp tube **1** (e.g., 15% to 25% for the one side). Alternatively, as shown in FIGS. **19** and **20**, the reflective film **12** may be provided without any opening, and the reflective film **12** is directly adhered or mounted to the inner surface of the lamp tube **1** and followed by mounting or fixing the LED light strip **2** on the reflective film **12** such that the reflective film **12** positioned on one side or two sides of the LED light strip **2**.

In the above mentioned embodiments, various types of the reflective film **12** and the diffusion film **13** can be adopted to accomplish optical effects including single reflection, single diffusion, and/or combined reflection-diffusion. For example, the lamp tube **1** may be provided with only the reflective film **12**, and no diffusion film **13** is disposed inside the lamp tube **1**, such as shown in FIGS. **19**, **20**, and **21**.

In other embodiments, the width of the LED light strip **2** (along the circumferential direction of the lamp tube) can be widened to occupy a circumference area of the inner circumferential surface of the lamp tube **1**. Since the LED light strip **2** has on its surface a circuit protective layer made of an ink which can reflect lights, the widened part of the LED light strip **2** functions like the reflective film **12** as mentioned above. In some embodiments, a ratio of the length of the LED light strip **2** along the circumferential direction to the circumferential length of the lamp tube **1** is about 0.3 to 0.5. The light emitted from the light sources could be concentrated by the reflection of the widened part of the LED light strip **2**.

In other embodiments, the inner surface of the glass made lamp tube may be coated totally with the optical diffusion coating, or partially with the optical diffusion coating (where the reflective film **12** is coated have no optical diffusion coating). No matter in what coating manner, in some embodiments, it is more desirable that the optical diffusion coating be coated on the outer surface of the rear end region of the lamp tube **1** so as to firmly secure the end cap **3** with the lamp tube **1**.

In the present invention, the light emitted from the light sources may be processed with the abovementioned diffusion film, reflective film, other kinds of diffusion layer sheets, adhesive film, or any combination thereof.

Referring again to FIG. **1**B, the LED tube lamp according to some embodiments of present invention also includes an adhesive sheet **4**, an insulation adhesive sheet **7**, and an optical adhesive sheet **8**. The LED light strip **2** is fixed by the adhesive sheet **4** to an inner circumferential surface of the lamp tube **1**. The adhesive sheet **4** may be but is not limited to a silicone adhesive. The adhesive sheet **4** may be in form of several short pieces or a long piece. Various kinds of the adhesive sheet **4**, the insulation adhesive sheet **7**, and the optical adhesive sheet **8** can be combined to constitute various embodiments of the present invention.

The insulation adhesive sheet **7** is coated on the surface of the LED light strip **2** that faces the LED light sources **202** so that the LED light strip **2** is not exposed and thus electrically insulated from the outside environment. In application of the insulation adhesive sheet **7**, a plurality of through holes **71** on the insulation adhesive sheet **7** are reserved to correspondingly accommodate the LED light sources **202** such that the LED light sources **202** are mounted in the through holes **701**. The material composition of the insulation adhesive sheet **7** may include, for example vinyl silicone, hydrogen polysiloxane and aluminum oxide. The insulation adhesive sheet **7** has a thickness, for example, ranging from about 100 μm to about 140 μm (micrometers). The insulation adhesive sheet **7** having a thickness less than 100 μm typically does not produce sufficient insulating effect, while the insulation adhesive sheet **7** having a thickness more than 140 μm may result in material waste.

The optical adhesive sheet **8**, which is a clear or transparent material, is applied or coated on the surface of the LED light source **202** in order to ensure optimal light transmittance. After being applied to the LED light sources **202**, the optical adhesive sheet **8** may have a granular, strip-like or sheet-like shape. The performance of the optical adhesive sheet **8** depends on its refractive index and thickness. The refractive index of the optical adhesive sheet **8** is in some embodiments between 1.22 and 1.6. In some embodiments, it is better for the optical adhesive sheet **8** to have a refractive index being a square root of the refractive index of the housing or casing of the LED light source **202**, or the square root of the refractive index of the housing or casing of the LED light source **202** plus or minus 15%, to contribute better light transmittance. The housing/casing of the LED light sources **202** is a structure to accommodate and carry the LED dies (or chips) such as a LED lead frame **202***b* as shown in FIG. **37**. The refractive index of the optical adhesive sheet **8** may range from 1.225 to 1.253. In some embodiments, the thickness of the optical adhesive sheet **8** may range from 1.1 mm to 1.3 mm. The optical adhesive sheet **8** having a thickness less than 1.1 mm may not be able to cover the LED light sources **202**, while the optical adhesive sheet **8** having a thickness more than 1.3 mm may reduce light transmittance and increases material cost.

In some embodiments, in the process of assembling the LED light sources to the LED light strip, the optical adhesive sheet **8** is first applied on the LED light sources **202**; then the insulation adhesive sheet **7** is coated on one side of the LED light strip **2**; then the LED light sources **202** are fixed or mounted on the LED light strip **2**; the other side of the LED light strip **2** being opposite to the side of mounting the LED light sources **202** is bonded and affixed to the inner surface of the lamp tube **1** by the adhesive sheet **4**; finally, the end cap **3** is fixed to the end portion of the lamp tube **1**, and the LED light sources **202** and the power supply **5** are electrically connected by the LED light strip **2**. As shown in the embodiment of FIG. **22**, the bendable circuit sheet **2** passes the transition region **103** to be soldered or traditionally wire-bonded with the power supply **5**, and then the end cap **3** having the structure as shown in FIG. **3** or **4** or FIG. **6** is adhered to the strengthened transition region **103** via methods as shown in FIG. **5** or FIG. **7**, respectively to form a complete LED tube lamp.

In this embodiment, the LED light strip **2** is fixed by the adhesive sheet **4** to an inner circumferential surface of the lamp tube **1**, so as to increase the light illumination angle of the LED tube lamp and broaden the viewing angle to be greater than 330 degrees. By means of applying the insulation adhesive sheet **7** and the optical adhesive sheet **8**, electrical insulation of the entire light strip **2** is accomplished such that electrical shock would not occur even when the lamp tube **1** is broken and therefore safety could be improved.

Furthermore, the inner peripheral surface or the outer circumferential surface of the glass made lamp tube **1** may be covered or coated with an adhesive film (not shown) to isolate the inside from the outside of the glass made lamp

tube **1** when the glass made lamp tube **1** is broken. In this embodiment, the adhesive film is coated on the inner peripheral surface of the lamp tube **1**. The material for the coated adhesive film includes, for example, methyl vinyl silicone oil, hydro silicone oil, xylene, and calcium carbonate, wherein xylene is used as an auxiliary material. The xylene will be volatilized and removed when the coated adhesive film on the inner surface of the lamp tube **1** solidifies or hardens. The xylene is mainly used to adjust the capability of adhesion and therefore to control the thickness of the coated adhesive film.

In one embodiment, the thickness of the coated adhesive film is preferably between about 100 and about 140 micrometers (μm). The adhesive film having a thickness being less than 100 micrometers may not have sufficient shatterproof capability for the glass tube, and the glass tube is thus prone to crack or shatter. The adhesive film having a thickness being larger than 140 micrometers may reduce the light transmittance and also increase material cost. The thickness of the coated adhesive film may be between about 10 and about 800 micrometers (μm) when the shatterproof capability and the light transmittance are not strictly demanded.

In one embodiment, the inner peripheral surface or the outer circumferential surface of the glass made lamp tube **1** is coated with an adhesive film such that the broken pieces are adhered to the adhesive film when the glass made lamp tube is broken. Therefore, the lamp tube **1** would not be penetrated to form a through hole connecting the inside and outside of the lamp tube **1** and thus prevents a user from touching any charged object inside the lamp tube **1** to avoid electrical shock. In addition, the adhesive film is able to diffuse light and allows the light to transmit such that the light uniformity and the light transmittance of the entire LED tube lamp increases. The adhesive film can be used in combination with the adhesive sheet **4**, the insulation adhesive sheet **7** and the optical adhesive sheet **8** to constitute various embodiments of the present invention. As the LED light strip **2** is configured to be a bendable circuit sheet, no coated adhesive film is thereby required.

Furthermore, the light strip **2** may be an elongated aluminum plate, FR 4 board, or a bendable circuit sheet. When the lamp tube **1** is made of glass, adopting a rigid aluminum plate or FR4 board would make a broken lamp tube, e.g., broken into two parts, remain a straight shape so that a user may be under a false impression that the LED tube lamp is still usable and fully functional, and it is easy for him to incur electric shock upon handling or installation of the LED tube lamp. Because of added flexibility and bendability of the flexible substrate for the LED light strip **2**, the problem faced by the aluminum plate, FR4 board, or conventional 3-layered flexible board having inadequate flexibility and bendability, are thereby addressed. In certain embodiments, a bendable circuit sheet is adopted as the LED light strip **2** for that such a LED light strip **2** would not allow a ruptured or broken lamp tube to maintain a straight shape and therefore instantly inform the user of the disability of the LED tube lamp and avoid possibly incurred electrical shock. The following are further descriptions of the bendable circuit sheet used as the LED light strip **2**.

Referring to FIG. **23**, in one embodiment, the LED light strip **2** includes a bendable circuit sheet having a conductive wiring layer **2***a* and a dielectric layer **2***b* that are arranged in a stacked manner, wherein the wiring layer **2***a* and the dielectric layer **2***b* have same areas. The LED light source **202** is disposed on one surface of the wiring layer **2***a*, the dielectric layer **2***b* is disposed on the other surface of the wiring layer **2***a* that is away from the LED light sources **202**. The wiring layer **2***a* is electrically connected to the power supply **5** to carry direct current (DC) signals. Meanwhile, the surface of the dielectric layer **2***b* away from the wiring layer **2***a* is fixed to the inner circumferential surface of the lamp tube **1** by means of the adhesive sheet **4**. The wiring layer **2***a* can be a metal layer or a power supply layer including wires such as copper wires.

In another embodiment, the outer surface of the wiring layer **2***a* or the dielectric layer **2***b* may be covered with a circuit protective layer made of an ink with function of resisting soldering and increasing reflectivity. Alternatively, the dielectric layer can be omitted and the wiring layer can be directly bonded to the inner circumferential surface of the lamp tube, and the outer surface of the wiring layer **2***a* is coated with the circuit protective layer. Whether the wiring layer **2***a* has a one-layered, or two-layered structure, the circuit protective layer can be adopted. In some embodiments, the circuit protective layer is disposed only on one side/surface of the LED light strip **2**, such as the surface having the LED light source **202**. In some embodiments, the bendable circuit sheet is a one-layered structure made of just one wiring layer **2***a*, or a two-layered structure made of one wiring layer **2***a* and one dielectric layer **2***b*, and thus is more bendable or flexible to curl when compared with the conventional three-layered flexible substrate (one dielectric layer sandwiched with two wiring layers). As a result, the bendable circuit sheet of the LED light strip **2** can be installed in a lamp tube with a customized shape or non-tubular shape, and fitly mounted to the inner surface of the lamp tube. The bendable circuit sheet closely mounted to the inner surface of the lamp tube is preferable in some cases. In addition, using fewer layers of the bendable circuit sheet improves the heat dissipation and lowers the material cost.

Nevertheless, the bendable circuit sheet is not limited to being one-layered or two-layered; in other embodiments, the bendable circuit sheet may include multiple layers of the wiring layers **2***a* and multiple layers of the dielectric layers **2***b*, in which the dielectric layers **2***b* and the wiring layers **2***a* are sequentially stacked in a staggered manner, respectively. These stacked layers are away from the surface of the outermost wiring layer **2***a* which has the LED light source **202** disposed thereon and is electrically connected to the power supply **5**. Moreover, the length of the bendable circuit sheet is greater than the length of the lamp tube.

Referring to FIG. **48**, in one embodiment, the LED light strip **2** includes a bendable circuit sheet having in sequence a first wiring layer **2***a*, a dielectric layer **2***b*, and a second wiring layer **2***c*. The thickness of the second wiring layer **2***c* is greater than that of the first wiring layer **2***a*, and the length of the LED light strip **2** is greater than that of the lamp tube **1**. The end region of the light strip **2** extending beyond the end portion of the lamp tube **1** without disposition of the light source **202** is formed with two separate through holes **203** and **204** to respectively electrically communicate the first wiring layer **2***a* and the second wiring layer **2***c*. The through holes **203** and **204** are not communicated to each other to avoid short.

In this way, the greater thickness of the second wiring layer **2***c* allows the second wiring layer **2***c* to support the first wiring layer **2***a* and the dielectric layer **2***b*, and meanwhile allow the LED light strip **2** to be mounted onto the inner circumferential surface without being liable to shift or deform, and thus the yield rate of product can be improved. In addition, the first wiring layer **2***a* and the second wiring layer **2***c* are in electrical communication such that the circuit layout of the first wiring layer **2***a* can be extended downward to the second wiring layer **2***c* to reach the circuit layout of

the entire LED light strip **2**. Moreover, since the land for the circuit layout becomes two-layered, the area of each single layer and therefore the width of the LED light strip **2** can be reduced such that more LED light strips **2** can be put on a production line to increase productivity.

Furthermore, the first wiring layer **2***a* and the second wiring layer **2***c* of the end region of the LED light strip **2** that extends beyond the end portion of the lamp tube **1** without disposition of the light source **202** can be used to accomplish the circuit layout of a power supply module so that the power supply module can be directly disposed on the bendable circuit sheet of the LED light strip **2**.

Referring to FIG. **1**B, in one embodiment, the LED light strip **2** has a plurality of LED light sources **202** mounted thereon, and the end cap **3** has a power supply **5** installed therein. The LED light sources **202** and the power supply **5** are electrically connected by the LED light strip **2**. The power supply **5** may be a single integrated unit (i.e., all of the power supply components are integrated into one module unit) installed in one end cap **3**. Alternatively, the power supply **5** may be divided into two separate units (i.e. the power supply components are divided into two parts) installed in two end caps **3**, respectively. When only one end of the lamp tube **1** is strengthened by a glass tempering process, it may be preferable that the power supply **5** is a single integrated unit and installed in the end cap **3** corresponding to the strengthened end of the lamp tube **1**.

The power supply **5** can be fabricated by various ways. For example, the power supply **5** may be an encapsulation body formed by injection molding a silica gel with high thermal conductivity such as being greater than 0.7 w/m·k. This kind of power supply has advantages of high electrical insulation, high heat dissipation, and regular shape to match other components in an assembly. Alternatively, the power supply **5** in the end caps may be a printed circuit board having components that are directly exposed or packaged by a heat shrink sleeve. The power supply **5** according to some embodiments of the present invention can be a single printed circuit board provided with a power supply module as shown in FIG. **23** or a single integrated unit as shown in FIG. **38**.

Referring to FIGS. **1**B and **38**, in one embodiment of the present invention, the power supply **5** is provided with a male plug **51** at one end and a metal pin **52** at the other end, one end of the LED light strip **2** is correspondingly provided with a female plug **201**, and the end cap **3** is provided with a hollow conductive pin **301** to be connected with an outer electrical power source. Specifically, the male plug **51** is fittingly inserted into the female plug **201** of the LED light strip **2**, while the metal pins **52** are fittingly inserted into the hollow conductive pins **301** of the end cap **3**. The male plug **51** and the female plug **201** function as a connector between the power supply **5** and the LED light strip **2**. Upon insertion of the metal pin **502**, the hollow conductive pin **301** is punched with an external punching tool to slightly deform such that the metal pin **502** of the power supply **5** is secured and electrically connected to the hollow conductive pin **301**. Upon turning on the electrical power, the electrical current passes in sequence through the hollow conductive pin **301**, the metal pin **502**, the male plug **501**, and the female plug **201** to reach the LED light strip **2** and go to the LED light sources **202**. However, the power supply **5** of the present invention is not limited to the modular type as shown in FIG. **38**. The power supply **5** may be a printed circuit board provided with a power supply module and electrically connected to the LED light strip **2** via the abovementioned the male plug **51** and female plug **52** combination.

In another embodiment, a traditional wire bonding technique can be used instead of the male plug **51** and the female plug **52** for connecting any kind of the power supply **5** and the light strip **2**. Furthermore, the wires may be wrapped with an electrically insulating tube to protect a user from being electrically shocked. However, the bonded wires tend to be easily broken during transportation and can therefore cause quality issues.

In still another embodiment, the connection between the power supply **5** and the LED light strip **2** may be accomplished via tin soldering, rivet bonding, or welding. One way to secure the LED light strip **2** is to provide the adhesive sheet **4** at one side thereof and adhere the LED light strip **2** to the inner surface of the lamp tube **1** via the adhesive sheet **4**. Two ends of the LED light strip **2** can be either fixed to or detached from the inner surface of the lamp tube **1**.

In case that two ends of the LED light strip **2** are fixed to the inner surface of the lamp tube **1**, it may be preferable that the bendable circuit sheet of the LED light strip **2** is provided with the female plug **201** and the power supply is provided with the male plug **51** to accomplish the connection between the LED light strip **2** and the power supply **5**. In this case, the male plug **51** of the power supply **5** is inserted into the female plug **201** to establish electrical connection.

In case that two ends of the LED light strip **2** are detached from the inner surface of the lamp tube and that the LED light strip **2** is connected to the power supply **5** via wire-bonding, any movement in subsequent transportation is likely to cause the bonded wires to break. Therefore, a preferable option for the connection between the light strip **2** and the power supply **5** could be soldering. Specifically, referring to FIG. **22**, the ends of the LED light strip **2** including the bendable circuit sheet are arranged to pass over the strengthened transition region **103** and directly soldering bonded to an output terminal of the power supply **5** such that the product quality is improved without using wires. In this way, the female plug **201** and the male plug **51** respectively provided for the LED light strip **2** and the power supply **5** are no longer needed.

Referring to FIG. **24**, an output terminal of the printed circuit board of the power supply **5** may have soldering pads "a" provided with an amount of tin solder with a thickness sufficient to later form a solder joint. Correspondingly, the ends of the LED light strip **2** may have soldering pads "b". The soldering pads "a" on the output terminal of the printed circuit board of the power supply **5** are soldered to the soldering pads "b" on the LED light strip **2** via the tin solder on the soldering pads "a". The soldering pads "a" and the soldering pads "b" may be face to face during soldering such that the connection between the LED light strip **2** and the printed circuit board of the power supply **5** is the most firm. However, this kind of soldering typically includes that a thermo-compression head presses on the rear surface of the LED light strip **2** and heats the tine solder, i.e. the LED light strip **2** intervenes between the thermo-compression head and the tin solder, and therefore may easily cause reliability problems. Referring to FIG. **30**, a through hole may be formed in each of the soldering pads "b" on the LED light strip **2** to allow the soldering pads "b" overlay the soldering pads "b" without face-to-face and the thermo-compression head directly presses tin solders on the soldering pads "a" on surface of the printed circuit board of the power supply **5** when the soldering pads "a" and the soldering pads "b" are vertically aligned. This is an easy way to accomplish in practice.

Referring again to FIG. **24**, two ends of the LED light strip **2** detached from the inner surface of the lamp tube **1** are

formed as freely extending portions **21**, while most of the LED light strip **2** is attached and secured to the inner surface of the lamp tube **1**. One of the freely extending portions **21** has the soldering pads "b" as mentioned above. Upon assembling of the LED tube lamp, the freely extending end portions **21** along with the soldered connection of the printed circuit board of the power supply **5** and the LED light strip **2** would be coiled, curled up or deformed to be fittingly accommodated inside the lamp tube **1**. When the bendable circuit sheet of the LED light strip **2** includes in sequence the first wiring layer **2***a*, the dielectric layer **2***b*, and the second wiring layer **2***c* as shown in FIG. **48**, the freely extending end portions **21** can be used to accomplish the connection between the first wiring layer **2***a* and the second wiring layer **2***c* and arrange the circuit layout of the power supply **5**.

In this embodiment, during the connection of the LED light strip **2** and the power supply **5**, the soldering pads "b" and the soldering pads "a" and the LED light sources **202** are on surfaces facing toward the same direction and the soldering pads "b" on the LED light strip **2** are each formed with a through hole "e" as shown in FIG. **30** such that the soldering pads "b" and the soldering pads "a" communicate with each other via the through holes "e". When the freely extending end portions **21** are deformed due to contraction or curling up, the soldered connection of the printed circuit board of the power supply **5** and the LED light strip **2** exerts a lateral tension on the power supply **5**. Furthermore, the soldered connection of the printed circuit board of the power supply **5** and the LED light strip **2** also exerts a downward tension on the power supply **5** when compared with the situation where the soldering pads "a" of the power supply **5** and the soldering pads "b" of the LED light strip **2** are face to face. This downward tension on the power supply **5** comes from the tin solders inside the through holes "e" and forms a stronger and more secure electrical connection between the LED light strip **2** and the power supply **5**.

Referring to FIG. **25**, in one embodiment, the soldering pads "b" of the LED light strip **2** are two separate pads to electrically connect the positive and negative electrodes of the bendable circuit sheet of the LED light strip **2**, respectively. The size of the soldering pads "b" may be, for example, about 3.5×2 mm^2. The printed circuit board of the power supply **5** is correspondingly provided with soldering pads "a" having reserved tin solders, and the height of the tin solders suitable for subsequent automatic soldering bonding process is generally, for example, about 0.1 to 0.7 mm, in some preferable embodiments about 0.3 to about 0.5 mm, and in some even more preferable embodiments about 0.4 mm. An electrically insulating through hole "c" may be formed between the two soldering pads "b" to isolate and prevent the two soldering pads from electrically short during soldering. Furthermore, an extra positioning opening "d" may also be provided behind the electrically insulating through hole "c" to allow an automatic soldering machine to quickly recognize the position of the soldering pads "b".

For the sake of achieving scalability and compatibility, the amount of the soldering pads "b" on each end of the LED light strip **2** may be more than one such as two, three, four, or more than four. When there is only one soldering pad "b" provided at each end of the LED light strip **2**, the two ends of the LED light strip **2** are electrically connected to the power supply **5** to form a loop, and various electrical components can be used. For example, a capacitance may be replaced by an inductance to perform current regulation. Referring to FIGS. **26** to **28**, when each end of the LED light strip **2** has three soldering pads, the third soldering pad can be grounded; when each end of the LED light strip **2** has four soldering pads, the fourth soldering pad can be used as a signal input terminal. Correspondingly, in some embodiments, the power supply **5** should have same amount of soldering pads "a" as that of the soldering pads "b" on the LED light strip **2**. In some embodiments, as long as electrical short between the soldering pads "b" can be prevented, the soldering pads "b" should be arranged according to the dimension of the actual area for disposition, for example, three soldering pads can be arranged in a row or two rows. In other embodiments, the amount of the soldering pads "b" on the bendable circuit sheet of the LED light strip **2** may be reduced by rearranging the circuits on the bendable circuit sheet of the LED light strip **2**. The lesser the amount of the soldering pads, the easier the fabrication process becomes. On the other hand, a greater number of soldering pads may improve and secure the electrical connection between the LED light strip **2** and the output terminal of the power supply **5**.

Referring to FIG. **30**, in another embodiment, the soldering pads "b" each is formed with a through hole "e" having a diameter generally of about 1 to 2 mm, in some preferred embodiments of about 1.2 to 1.8 mm, and in yet further preferred embodiments of about 1.5 mm. The through hole "e" communicates the soldering pad "a" with the soldering pad "b" so that the tin solder on the soldering pads "a" passes through the through holes "e" and finally reach the soldering pads "b". A smaller through hole "e" would make it difficult for the tin solder to pass. The tin solder accumulates around the through holes "e" upon exiting the through holes "e" and condense to form a solder ball "g" with a larger diameter than that of the through holes "e" upon condensing. Such a solder ball "g" functions as a rivet to further increase the stability of the electrical connection between the soldering pads "a" on the power supply **5** and the soldering pads "b" on the LED light strip **2**.

Referring to FIGS. **31** to **32**, in other embodiments, when a distance from the through hole "e" to the side edge of the LED light strip **2** is less than 1 mm, the tin solder may pass through the through hole "e" to accumulate on the periphery of the through hole "e", and extra tin solder may spill over the soldering pads "b" to reflow along the side edge of the LED light strip **2** and join the tin solder on the soldering pads "a" of the power supply **5**. The tin solder then condenses to form a structure like a rivet to firmly secure the LED light strip **2** onto the printed circuit board of the power supply **5** such that reliable electric connection is achieved. Referring to FIGS. **33** and **34**, in another embodiment, the through hole "e" can be replaced by a notch "f" formed at the side edge of the soldering pads "b" for the tin solder to easily pass through the notch "f" and accumulate on the periphery of the notch "f" and to form a solder ball with a larger diameter than that of the notch "e" upon condensing. Such a solder ball may be formed like a C-shape rivet to enhance the secure capability of the electrically connecting structure.

The abovementioned through hole "e" or notch "f" might be formed in advance of soldering or formed by direct punching with a thermo-compression head, as shown in FIG. **40**, during soldering. The portion of the thermo-compression head for touching the tin solder may be flat, concave, or convex, or any combination thereof. The portion of the thermo-compression head for restraining the object to be soldered such as the LED light strip **2** may be strip-like or grid-like. The portion of the thermo-compression head for touching the tin solder does not completely cover the through hole "e" or the notch "f" to make sure that the tin solder is able to pass through the through hole "e" or the

notch "f". The portion of the thermo-compression head being concave may function as a room to receive the solder ball.

Referring to FIG. **40**, a thermo-compression head **41** used for bonding the soldering pads "a" on the power supply **5** and the soldering pads "b" on the light strip **2** is mainly composed of four sections: a bonding plane **411**, a plurality of concave guiding tanks **412**, a plurality of concave molding tanks **413**, and a restraining plane **414**. The bonding plane **411** is a portion actually touching, pressing and heating the tin solder to perform soldering bonding. The bonding plane **411** may be flat, concave, convex or any combination thereof. The concave guiding tanks **412** are formed on the bonding plane **411** and opened near an edge of the bonding plane **411** to guide the heated and melted tin solder to flow into the through holes or notches formed on the soldering pads. For example, the guiding tanks **412** may function to guide and stop the melted tin solders. The concave molding tanks **413** are positioned beside the guiding tanks **412** and have a concave portion more depressed than that of the guiding tanks **412** such that the concave molding tanks **413** each form a housing to receive the solder ball. The restraining plane **414** is a portion next to the bonding plane **411** and formed with the concave molding tanks **413**. The restraining plane **414** is lower than the bonding plane **411** such that the restraining plane **414** firmly presses the LED light strip **2** on the printed circuit board of the power supply **5** while the bonding plane **411** presses against the soldering pads "b" during the soldering bonding. The restraining plane **414** may be strip-like or grid-like on surface. The difference of height of the bonding plane **411** and the restraining plane **414** is the thickness of the LED light strip **2**.

Referring to FIGS. **41**, **25**, and **40**, soldering pads corresponding to the soldering pads of the LED light strip are formed on the printed circuit board of the power supply **5** and tin solder is reserved on the soldering pads on the printed circuit board of the power supply **5** for subsequent soldering bonding performed by an automatic soldering bonding machine. The tin solder in some embodiments has a thickness of about 0.3 mm to about 0.5 mm such that the LED light strip **2** can be firmly soldered to the printed circuit board of the power supply **5**. As shown in FIG. **41**, in case of having height difference between two tin solders respectively reserved on two soldering pads on the printed circuit board of the power supply **5**, the higher one will be touched first and melted by the thermo-compression head **41** while the other one will be touched and start to melt until the higher one is melted to a height the same as the height of the other one. This usually incurs unsecured soldering bonding for the reserved tin solder with smaller height, and therefore affects the electrical connection between the LED light strip **2** and the printed circuit board of the power supply **5**. To alleviate this problem, in one embodiment, the present invention applies the kinetic equilibrium principal and installs a linkage mechanism on the thermo-compression head **41** to allow rotation of the thermo-compression head **41** during a soldering bonding such that the thermo-compression head **41** starts to heat and melt the two reserved tin solders only when the thermo-compression head **41** detects that the pressure on the two reserved tin solders are the same.

In the abovementioned embodiment, the thermo-compression head **41** is rotatable while the LED light strip **2** and the printed circuit board of the power supply **5** remain unmoved. Referring to FIG. **42**, in another embodiment, the thermo-compression head **41** is unmoved while the LED light strip is allowed to rotate. In this embodiment, the LED light strip **2** and the printed circuit board of the power supply **5** are loaded on a soldering vehicle **60** including a rotary platform **61**, a vehicle holder **62**, a rotating shaft **63**, and two elastic members **64**. The rotary platform **61** functions to carry the LED light strip **2** and the printed circuit board of the power supply **5**. The rotary platform **61** is movably mounted to the vehicle holder **62** via the rotating shaft **63** so that the rotary platform **61** is able to rotate with respect to the vehicle holder **62** while the vehicle holder **62** bears and holds the rotary platform **61**. The two elastic members **64** are disposed on two sides of the rotating shaft **63**, respectively, such that the rotary platform **61** in connection with the rotating shaft **63** always remains at the horizontal level when the rotary platform **61** is not loaded. In this embodiment, the elastic members **64** are springs for example, and the ends thereof are disposed corresponding to two sides of the rotating shaft **63** so as to function as two pivots on the vehicle holder **62**. As shown in FIG. **42**, when two tin solders reserved on the LED light strip **2** pressed by the thermo-compression head **41** are not at the same height level, the rotary platform **61** carrying the LED light strip **2** and the printed circuit board of the power supply **5** will be driven by the a rotating shaft **63** to rotate until the thermo-compression head **41** detects the same pressure on the two reserved tin solders, and then starts a soldering bonding. Referring to FIG. **43**, when the rotary platform **61** rotates, the elastic members **64** at two sides of the rotating shaft **63** are compressed or pulled; and the driving force of the rotating shaft **63** releases and the rotary platform **61** returns to the original height level by the resilience of the elastic members **64** when the soldering bonding is completed.

In other embodiments, the rotary platform **61** may be designed to have mechanisms without using the rotating shaft **63** and the elastic members **64**. For example, the rotary platform **61** may be designed to have driving motors and active rotary mechanisms, and therefore the vehicle holder **62** is saved. Accordingly, other embodiments utilizing the kinetic equilibrium principle to drive the LED light strip **2** and the printed circuit board of the power supply **5** to move in order to complete the soldering bonding process are within the spirit of the present invention.

Referring to FIGS. **35** and **36**, in another embodiment, the LED light strip **2** and the power supply **5** may be connected by utilizing a circuit board assembly **25** instead of soldering bonding. The circuit board assembly **25** has a long circuit sheet **251** and a short circuit board **253** that are adhered to each other with the short circuit board **253** being adjacent to the side edge of the long circuit sheet **251**. The short circuit board **253** may be provided with power supply module **250** to form the power supply **5**. The short circuit board **253** is stiffer or more rigid than the long circuit sheet **251** to be able to support the power supply module **250**.

The long circuit sheet **251** may be the bendable circuit sheet of the LED light strip including a wiring layer **2***a* as shown in FIG. **23**. The wiring layer **2***a* of the long circuit sheet **251** and the power supply module **250** may be electrically connected in various manners depending on the demand in practice. As shown in FIG. **35**, the power supply module **250** and the long circuit sheet **251** having the wiring layer **2***a* on surface are on the same side of the short circuit board **253** such that the power supply module **250** is directly connected to the long circuit sheet **251**. As shown in FIG. **36**, alternatively, the power supply module **250** and the long circuit sheet **251** including the wiring layer **2***a* on surface are on opposite sides of the short circuit board **253** such that the power supply module **250** is directly connected to the short

circuit board **253** and indirectly connected to the wiring layer **2***a* of the LED light strip **2** by way of the short circuit board **253**.

As shown in FIG. **35**, in one embodiment, the long circuit sheet **251** and the short circuit board **253** are adhered together first, and the power supply module **250** is subsequently mounted on the wiring layer **2***a* of the long circuit sheet **251** serving as the LED light strip **2**. The long circuit sheet **251** of the LED light strip **2** herein is not limited to include only one wiring layer **2***a* and may further include another wiring layer such as the wiring layer **2***c* shown in FIG. **48**. The light sources **202** are disposed on the wiring layer **2***a* of the LED light strip **2** and electrically connected to the power supply **5** by way of the wiring layer **2***a*. As shown in FIG. **36**, in another embodiment, the long circuit sheet **251** of the LED light strip **2** may include a wiring layer **2***a* and a dielectric layer **2***b*. The dielectric layer **2***b* may be adhered to the short circuit board **253** first and the wiring layer **2***a* is subsequently adhered to the dielectric layer **2***b* and extends to the short circuit board **253**. All these embodiments are within the scope of applying the circuit board assembly concept of the present invention.

In the above-mentioned embodiments, the short circuit board **253** may have a length generally of about 15 mm to about 40 mm and in some preferable embodiments about 19 mm to about 36 mm, while the long circuit sheet **251** may have a length generally of about 800 mm to about 2800 mm and in some embodiments of about 1200 mm to about 2400 mm. A ratio of the length of the short circuit board **253** to the length of the long circuit sheet **251** ranges from, for example, about 1:20 to about 1:200.

When the ends of the LED light strip **2** are not fixed on the inner surface of the lamp tube **1**, the connection between the LED light strip **2** and the power supply **5** via soldering bonding could not firmly support the power supply **5**, and it may be necessary to dispose the power supply **5** inside the end cap **3**. For example, a longer end cap to have enough space for receiving the power supply **5** would be needed. However, this will reduce the length of the lamp tube under the prerequisite that the total length of the LED tube lamp is fixed according to the product standard, and may therefore decrease the effective illuminating areas.

Referring to FIG. **39**, in one embodiment, a hard circuit board **22** made of aluminum is used instead of the bendable circuit sheet, such that the ends or terminals of the hard circuit board **22** can be mounted at ends of the lamp tube **1**, and the power supply **5** is solder bonded to one of the ends or terminals of the hard circuit board **22** in a manner such that the printed circuit board of the power supply **5** is not parallel but may be perpendicular to the hard circuit board **22** to save space in the longitudinal direction used for the end cap. This solder bonding technique may be more convenient to accomplish and the effective illuminating areas of the LED tube lamp could also remain. Moreover, a conductive lead **53** for electrical connection with the end cap **3** could be formed directly on the power supply **5** without soldering other metal wires between the power supply **5** and the hollow conductive pin **301** as shown in FIG. **3**, and which facilitates the manufacturing of the LED tube lamp.

Next, examples of the circuit design and using of the power supply module **250** are described as follows.

FIG. **49**A is a block diagram of a power supply module **250** in an LED tube lamp according to an embodiment of the present invention. Referring to FIG. **49**A, an AC power supply **508** is used to supply an AC supply signal, and may be an AC powerline with a voltage rating, for example, in 100-277 volts and a frequency rating, for example, of 50 or 60 Hz. A lamp driving circuit **505** receives and then converts the AC supply signal into an AC driving signal as an external driving signal. Lamp driving circuit **505** may be for example an electronic ballast used to convert the AC powerline into a high-frequency high-voltage AC driving signal. Common types of electronic ballast include instant-start ballast, program-start or rapid-start ballast, etc., which may all be applicable to the LED tube lamp of the present invention. The voltage of the AC driving signal is likely higher than 300 volts, and is in some embodiments in the range of about 400-700 volts. The frequency of the AC driving signal is likely higher than 10 k Hz, and is in some embodiments in the range of about 20 k-50 k Hz. The LED tube lamp **500** receives an external driving signal and is thus driven to emit light. In one embodiment, the external driving signal comprises the AC driving signal from lamp driving circuit **505**. In one embodiment, LED tube lamp **500** is in a driving environment in which it is power-supplied at its one end cap having two conductive pins **501** and **502**, which are coupled to lamp driving circuit **505** to receive the AC driving signal. The two conductive pins **501** and **502** may be electrically connected to, either directly or indirectly, the lamp driving circuit **505**.

It is worth noting that lamp driving circuit **505** may be omitted and is therefore depicted by a dotted line. In one embodiment, if lamp driving circuit **505** is omitted, AC power supply **508** is directly connected to pins **501** and **502**, which then receive the AC supply signal as an external driving signal.

In addition to the above use with a single-end power supply, LED tube lamp **500** may instead be used with a dual-end power supply to one pin at each of the two ends of an LED lamp tube. FIG. **49**B is a block diagram of a power supply module **250** in an LED tube lamp according to one embodiment of the present invention. Referring to FIG. **49**B, compared to that shown in FIG. **49**A, pins **501** and **502** are respectively disposed at the two opposite end caps of LED tube lamp **500**, forming a single pin at each end of LED tube lamp **500**, with other components and their functions being the same as those in FIG. **49**A.

FIG. **49**C is a block diagram of an LED lamp according to one embodiment of the present invention. Referring to FIG. **49**C, the power supply module of the LED lamp summarily includes a rectifying circuit **510**, a filtering circuit **520**, and an LED driving module **530**. Rectifying circuit **510** is coupled to pins **501** and **502** to receive and then rectify an external driving signal, so as to output a rectified signal at output terminals **511** and **512**. The external driving signal may be the AC driving signal or the AC supply signal described with reference to FIGS. **49**A and **49**B, or may even be a DC signal, which embodiments do not alter the LED lamp of the present invention. Filtering circuit **520** is coupled to the first rectifying circuit for filtering the rectified signal to produce a filtered signal, as recited in the claims. For instance, filtering circuit **520** is coupled to terminals **511** and **512** to receive and then filter the rectified signal, so as to output a filtered signal at output terminals **521** and **522**. LED driving module **530** is coupled to filtering circuit **520**, to receive the filtered signal for emitting light. For instance, LED driving module **530** may be a circuit coupled to terminals **521** and **522** to receive the filtered signal and thereby to drive an LED unit (not shown) in LED driving module **530** to emit light. Details of these operations are described in below descriptions of certain embodiments.

It is worth noting that although there are two output terminals **511** and **512** and two output terminals **521** and **522** in embodiments of these Figs., in practice the number of

ports or terminals for coupling between rectifying circuit **510**, filtering circuit **520**, and LED driving module **530** may be one or more depending on the needs of signal transmission between the circuits or devices.

In addition, the power supply module of the LED lamp described in FIG. **49**C, and embodiments of the power supply module of an LED lamp described below, may each be used in the LED tube lamp **500** in FIGS. **49**A and **49**B, and may instead be used in any other type of LED lighting structure having two conductive pins used to conduct power, such as LED light bulbs, personal area lights (PAL), plug-in LED lamps with different types of bases (such as types of PL-S, PL-D, PL-T, PL-L, etc.), etc.

FIG. **49**D is a block diagram of a power supply module **250** in an LED tube lamp according to an embodiment of the present invention. Referring to FIG. **49**D, an AC power supply **508** is used to supply an AC supply signal. A lamp driving circuit **505** receives and then converts the AC supply signal into an AC driving signal. An LED tube lamp **500** receives an AC driving signal from lamp driving circuit **505** and is thus driven to emit light. In this embodiment, LED tube lamp **500** is power-supplied at its both end caps respectively having two pins **501** and **502** and two pins **503** and **504**, which are coupled to lamp driving circuit **505** to concurrently receive the AC driving signal to drive an LED unit (not shown) in LED tube lamp **500** to emit light. AC power supply **508** may be e.g. the AC powerline, and lamp driving circuit **505** may be a stabilizer or an electronic ballast.

FIG. **49**E is a block diagram of an LED lamp according to an embodiment of the present invention. Referring to FIG. **49**E, the power supply module of the LED lamp summarily includes a rectifying circuit **510**, a filtering circuit **520**, an LED driving module **530**, and a filtering circuit **540**. Rectifying circuit **510** is coupled to pins **501** and **502** to receive and then rectify an external driving signal conducted by pins **501** and **502**. Rectifying circuit **540** is coupled to pins **503** and **504** to receive and then rectify an external driving signal conducted by pins **503** and **504**. Therefore, the power supply module of the LED lamp may include two rectifying circuits **510** and **540** configured to output a rectified signal at output terminals **511** and **512**. Filtering circuit **520** is coupled to terminals **511** and **512** to receive and then filter the rectified signal, so as to output a filtered signal at output terminals **521** and **522**. LED driving module **530** is coupled to terminals **521** and **522** to receive the filtered signal and thereby to drive an LED unit (not shown) in LED driving module **530** to emit light.

The power supply module of the LED lamp in this embodiment of FIG. **49**E may be used in LED tube lamp **500** with a dual-end power supply in FIG. **49**D. It is worth noting that since the power supply module of the LED lamp comprises rectifying circuits **510** and **540**, the power supply module of the LED lamp may be used in LED tube lamp **500** with a single-end power supply in FIGS. **49**A and **49**B, to receive an external driving signal (such as the AC supply signal or the AC driving signal described above). The power supply module of an LED lamp in this embodiment and other embodiments herein may also be used with a DC driving signal.

FIG. **50**A is a schematic diagram of a rectifying circuit according to an embodiment of the present invention. Referring to FIG. **50**A, rectifying circuit **610** includes rectifying diodes **611**, **612**, **613**, and **614**, configured to full-wave rectify a received signal. Diode **611** has an anode connected to output terminal **512**, and a cathode connected to pin **502**. Diode **612** has an anode connected to output terminal **512**, and a cathode connected to pin **501**. Diode **613** has an anode connected to pin **502**, and a cathode connected to output terminal **511**. Diode **614** has an anode connected to pin **501**, and a cathode connected to output terminal **511**.

When pins **501** and **502** receive an AC signal, rectifying circuit **610** operates as follows. During the connected AC signal's positive half cycle, the AC signal is input through pin **501**, diode **614**, and output terminal **511** in sequence, and later output through output terminal **512**, diode **611**, and pin **502** in sequence. During the connected AC signal's negative half cycle, the AC signal is input through pin **502**, diode **613**, and output terminal **511** in sequence, and later output through output terminal **512**, diode **612**, and pin **501** in sequence. Therefore, during the connected AC signal's full cycle, the positive pole of the rectified signal produced by rectifying circuit **610** remains at output terminal **511**, and the negative pole of the rectified signal remains at output terminal **512**. Accordingly, the rectified signal produced or output by rectifying circuit **610** is a full-wave rectified signal.

When pins **501** and **502** are coupled to a DC power supply to receive a DC signal, rectifying circuit **610** operates as follows. When pin **501** is coupled to the anode of the DC supply and pin **502** to the cathode of the DC supply, the DC signal is input through pin **501**, diode **614**, and output terminal **511** in sequence, and later output through output terminal **512**, diode **611**, and pin **502** in sequence. When pin **501** is coupled to the cathode of the DC supply and pin **502** to the anode of the DC supply, the DC signal is input through pin **502**, diode **613**, and output terminal **511** in sequence, and later output through output terminal **512**, diode **612**, and pin **501** in sequence. Therefore, no matter what the electrical polarity of the DC signal is between pins **501** and **502**, the positive pole of the rectified signal produced by rectifying circuit **610** remains at output terminal **511**, and the negative pole of the rectified signal remains at output terminal **512**.

Therefore, rectifying circuit **610** in this embodiment can output or produce a proper rectified signal regardless of whether the received input signal is an AC or DC signal.

FIG. **50**B is a schematic diagram of a rectifying circuit according to an embodiment of the present invention. Referring to FIG. **50**B, rectifying circuit **710** includes rectifying diodes **711** and **712**, configured to half-wave rectify a received signal. Diode **711** has an anode connected to pin **502**, and a cathode connected to output terminal **511**. Diode **712** has an anode connected to output terminal **511**, and a cathode connected to pin **501**. Output terminal **512** may be omitted or grounded depending on actual applications.

Next, exemplary operation(s) of rectifying circuit **710** is described as follows.

In one embodiment, during a received AC signal's positive half cycle, the electrical potential at pin **501** is higher than that at pin **502**, so diodes **711** and **712** are both in a cutoff state as being reverse-biased, making rectifying circuit **710** not outputting a rectified signal. During a received AC signal's negative half cycle, the electrical potential at pin **501** is lower than that at pin **502**, so diodes **711** and **712** are both in a conducting state as being forward-biased, allowing the AC signal to be input through diode **711** and output terminal **511**, and later output through output terminal **512**, a ground terminal, or another end of the LED tube lamp not directly connected to rectifying circuit **710**. Accordingly, the rectified signal produced or output by rectifying circuit **710** is a half-wave rectified signal.

FIG. **50**C is a schematic diagram of a rectifying circuit according to an embodiment of the present invention. Referring to FIG. **50**C, rectifying circuit **810** includes a rectifying

unit **815** and a terminal adapter circuit **541**. In this embodiment, rectifying unit **815** comprises a half-wave rectifier circuit including diodes **811** and **812** and configured to half-wave rectify. Diode **811** has an anode connected to an output terminal **512**, and a cathode connected to a half-wave node **819**. Diode **812** has an anode connected to half-wave node **819**, and a cathode connected to an output terminal **511**. Terminal adapter circuit **541** is coupled to half-wave node **819** and pins **501** and **502**, to transmit a signal received at pin **501** and/or pin **502** to half-wave node **819**. By means of the terminal adapting function of terminal adapter circuit **541**, rectifying circuit **810** allows of two input terminals (connected to pins **501** and **502**) and two output terminals **511** and **512**.

Next, in certain embodiments, rectifying circuit **810** operates as follows.

During a received AC signal's positive half cycle, the AC signal may be input through pin **501** or **502**, terminal adapter circuit **541**, half-wave node **819**, diode **812**, and output terminal **511** in sequence, and later output through another end or circuit of the LED tube lamp. During a received AC signal's negative half cycle, the AC signal may be input through another end or circuit of the LED tube lamp, and later output through output terminal **512**, diode **811**, half-wave node **819**, terminal adapter circuit **541**, and pin **501** or **502** in sequence.

It's worth noting that terminal adapter circuit **541** may comprise a resistor, a capacitor, an inductor, or any combination thereof, for performing functions of voltage/current regulation or limiting, types of protection, current/voltage regulation, etc. Descriptions of these functions are presented below.

In practice, rectifying unit **815** and terminal adapter circuit **541** may be interchanged in position (as shown in FIG. **50**D), without altering the function of half-wave rectification. FIG. **50**D is a schematic diagram of a rectifying circuit according to an embodiment of the present invention. Referring to FIG. **50**D, diode **811** has an anode connected to pin **502** and diode **812** has a cathode connected to pin **501**. A cathode of diode **811** and an anode of diode **812** are connected to half-wave node **819**. Terminal adapter circuit **541** is coupled to half-wave node **819** and output terminals **511** and **512**. During a received AC signal's positive half cycle, the AC signal may be input through another end or circuit of the LED tube lamp, and later output through output terminal **512** or **512**, terminal adapter circuit **541**, half-wave node **819**, diode **812**, and pin **501** in sequence. During a received AC signal's negative half cycle, the AC signal may be input through pin **502**, diode **811**, half-wave node **819**, terminal adapter circuit **541**, and output node **511** or **512** in sequence, and later output through another end or circuit of the LED tube lamp.

It is worth noting that terminal adapter circuit **541** in embodiments shown in FIGS. **50**C and **50**D may be omitted and is therefore depicted by a dotted line. If terminal adapter circuit **541** of FIG. **50**C is omitted, pins **501** and **502** will be coupled to half-wave node **819**. If terminal adapter circuit **541** of FIG. **50**D is omitted, output terminals **511** and **512** will be coupled to half-wave node **819**.

Rectifying circuit **510** as shown and explained in FIGS. **50**A-D can constitute or be the rectifying circuit **540** shown in FIG. **49**E, as having pins **503** and **504** for conducting instead of pins **501** and **502**.

Next, an explanation follows as to choosing embodiments and their combinations of rectifying circuits **510** and **540**, with reference to FIGS. **49**C and **49**E.

Rectifying circuit **510** in embodiments shown in FIG. **49**C may comprise the rectifying circuit **610** in FIG. **50**A.

Rectifying circuits **510** and **540** in embodiments shown in FIG. **49**E may each comprise any one of the rectifying circuits in FIGS. **50**A-D, and terminal adapter circuit **541** in FIGS. **50**C-D may be omitted without altering the rectification function needed in an LED tube lamp. When rectifying circuits **510** and **540** each comprise a half-wave rectifier circuit described in FIGS. **50**B-D, during a received AC signal's positive or negative half cycle, the AC signal may be input from one of rectifying circuits **510** and **540**, and later output from the other rectifying circuit **510** or **540**. Further, when rectifying circuits **510** and **540** each comprise the rectifying circuit described in FIG. **50**C or **50**D, or when they comprise the rectifying circuits in FIGS. **50**C and **50**D respectively, only one terminal adapter circuit **541** may be needed for functions of voltage/current regulation or limiting, types of protection, current/voltage regulation, etc. within rectifying circuits **510** and **540**, omitting another terminal adapter circuit **541** within rectifying circuit **510** or **540**.

FIG. **51**A is a schematic diagram of the terminal adapter circuit according to an embodiment of the present invention. Referring to FIG. **51**A, terminal adapter circuit **641** comprises a capacitor **642** having an end connected to pins **501** and **502**, and another end connected to half-wave node **819**. Capacitor **642** has an equivalent impedance to an AC signal, which impedance increases as the frequency of the AC signal decreases, and decreases as the frequency increases. Therefore, capacitor **642** in terminal adapter circuit **641** in this embodiment works as a high-pass filter. Further, terminal adapter circuit **641** is connected in series to an LED unit in the LED tube lamp, producing an equivalent impedance of terminal adapter circuit **641** to perform a current/voltage limiting function on the LED unit, thereby preventing damaging of the LED unit by an excessive voltage across and/or current in the LED unit. In addition, choosing the value of capacitor **642** according to the frequency of the AC signal can further enhance voltage/current regulation.

It's worth noting that terminal adapter circuit **641** may further include a capacitor **645** and/or capacitor **646**. Capacitor **645** has an end connected to half-wave node **819**, and another end connected to pin **503**. Capacitor **646** has an end connected to half-wave node **819**, and another end connected to pin **504**. For example, half-wave node **819** may be a common connective node between capacitors **645** and **646**. And capacitor **642** acting as a current regulating capacitor is coupled to the common connective node and pins **501** and **502**. In such a structure, series-connected capacitors **642** and **645** exist between one of pins **501** and **502** and pin **503**, and/or series-connected capacitors **642** and **646** exist between one of pins **501** and **502** and pin **504**. Through equivalent impedances of series-connected capacitors, voltages from the AC signal are divided. Referring to FIGS. **49**E and **51**A, according to ratios between equivalent impedances of the series-connected capacitors, the voltages respectively across capacitor **642** in rectifying circuit **510**, filtering circuit **520**, and LED driving module **530** can be controlled, making the current flowing through an LED module in LED driving module **530** being limited within a current rating, and then protecting/preventing filtering circuit **520** and LED driving module **530** from being damaged by excessive voltages.

FIG. **51**B is a schematic diagram of the terminal adapter circuit according to an embodiment of the present invention. Referring to FIG. **51**B, terminal adapter circuit **741** comprises capacitors **743** and **744**. Capacitor **743** has an end connected to pin **501**, and another end connected to half-

wave node **819**. Capacitor **744** has an end connected to pin **502**, and another end connected to half-wave node **819**. Compared to terminal adapter circuit **641** in FIG. **51**A, terminal adapter circuit **741** has capacitors **743** and **744** in place of capacitor **642**. Capacitance values of capacitors **743** and **744** may be the same as each other, or may differ from each other depending on the magnitudes of signals to be received at pins **501** and **502**.

Similarly, terminal adapter circuit **741** may further comprise a capacitor **745** and/or a capacitor **746**, respectively connected to pins **503** and **504**. Thus, each of pins **501** and **502** and each of pins **503** and **504** may be connected in series to a capacitor, to achieve the functions of voltage division and other protections.

FIG. **51**C is a schematic diagram of the terminal adapter circuit according to an embodiment of the present invention. Referring to FIG. **51**C, terminal adapter circuit **841** comprises capacitors **842**, **843**, and **844**. Capacitors **842** and **843** are connected in series between pin **501** and half-wave node **819**. Capacitors **842** and **844** are connected in series between pin **502** and half-wave node **819**. In such a circuit structure, if any one of capacitors **842**, **843**, and **844** is shorted, there is still at least one capacitor (of the other two capacitors) between pin **501** and half-wave node **819** and between pin **502** and half-wave node **819**, which performs a current-limiting function. Therefore, in the event that a user accidentally gets an electric shock, this circuit structure will prevent an excessive current flowing through and then seriously hurting the body of the user.

Similarly, terminal adapter circuit **841** may further comprise a capacitor **845** and/or a capacitor **846**, respectively connected to pins **503** and **504**. Thus, each of pins **501** and **502** and each of pins **503** and **504** may be connected in series to a capacitor, to achieve the functions of voltage division and other protections.

FIG. **51**D is a schematic diagram of the terminal adapter circuit according to an embodiment of the present invention. Referring to FIG. **51**D, terminal adapter circuit **941** comprises fuses **947** and **948**. Fuse **947** has an end connected to pin **501**, and another end connected to half-wave node **819**. Fuse **948** has an end connected to pin **502**, and another end connected to half-wave node **819**. With the fuses **947** and **948**, when the current through each of pins **501** and **502** exceeds a current rating of a corresponding connected fuse **947** or **948**, the corresponding fuse **947** or **948** will accordingly melt and then break the circuit to achieve overcurrent protection.

Each of the embodiments of the terminal adapter circuits as in rectifying circuits **510** and **810** coupled to pins **501** and **502** and shown and explained above can be used or included in the rectifying circuit **540** shown in FIG. **49**E, as when conductive pins **503** and **504** and conductive pins **501** and **502** are interchanged in position.

Capacitance values of the capacitors in the embodiments of the terminal adapter circuits shown and described above are in some embodiments in the range, for example, of about 100 pF-100 nF. Also, a capacitor used in embodiments may be equivalently replaced by two or more capacitors connected in series or parallel. For example, each of capacitors **642** and **842** may be replaced by two series-connected capacitors, one having a capacitance value chosen from the range, for example of about 1.0 nF to about 2.5 nF and which may be in some embodiments preferably 1.5 nF, and the other having a capacitance value chosen from the range, for example of about 1.5 nF to about 3.0 nF, and which is in some embodiments about 2.2 nF.

FIG. **52**A is a block diagram of the filtering circuit according to an embodiment of the present invention. Rectifying circuit **510** is shown in FIG. **52**A for illustrating its connection with other components, without intending filtering circuit **520** to include rectifying circuit **510**. Referring to FIG. **52**A, filtering circuit **520** includes a filtering unit **523** coupled to rectifying output terminals **511** and **512** to receive, and to filter out ripples of, a rectified signal from rectifying circuit **510**, thereby outputting a filtered signal whose waveform is smoother than the rectified signal. Filtering circuit **520** may further comprise another filtering unit **524** coupled between a rectifying circuit and a pin, which are for example rectifying circuit **510** and pin **501**, rectifying circuit **510** and pin **502**, rectifying circuit **540** and pin **503**, or rectifying circuit **540** and pin **504**. Filtering unit **524** is for filtering of a specific frequency, in order to filter out a specific frequency component of an external driving signal. In this embodiment of FIG. **52**A, filtering unit **524** is coupled between rectifying circuit **510** and pin **501**. Filtering circuit **520** may further comprise another filtering unit **525** coupled between one of pins **501** and **502** and a diode of rectifying circuit **510**, or between one of pins **503** and **504** and a diode of rectifying circuit **540**, for reducing or filtering out electromagnetic interference (EMI). In this embodiment, filtering unit **525** is coupled between pin **501** and a diode (not shown in FIG. **52**A) of rectifying circuit **510**. Since filtering units **524** and **525** may be present or omitted depending on actual circumstances of their uses, they are depicted by a dotted line in FIG. **52**A.

FIG. **52**B is a schematic diagram of the filtering unit according to an embodiment of the present invention. Referring to FIG. **52**B, filtering unit **623** includes a capacitor **625** having an end coupled to output terminal **511** and a filtering output terminal **521** and another end coupled to output terminal **512** and a filtering output terminal **522**, and is configured to low-pass filter a rectified signal from output terminals **511** and **512**, so as to filter out high-frequency components of the rectified signal and thereby output a filtered signal at output terminals **521** and **522**.

FIG. **52**C is a schematic diagram of the filtering unit according to an embodiment of the present invention. Referring to FIG. **52**C, filtering unit **723** comprises a pi filter circuit including a capacitor **725**, an inductor **726**, and a capacitor **727**. As is well known, a pi filter circuit looks like the symbol π in its shape or structure. Capacitor **725** has an end connected to output terminal **511** and coupled to output terminal **521** through inductor **726**, and has another end connected to output terminals **512** and **522**. Inductor **726** is coupled between output terminals **511** and **521**. Capacitor **727** has an end connected to output terminal **521** and coupled to output terminal **511** through inductor **726**, and has another end connected to output terminals **512** and **522**.

As seen between output terminals **511** and **512** and output terminals **521** and **522**, filtering unit **723** compared to filtering unit **623** in FIG. **52**B additionally has inductor **726** and capacitor **727**, which are like capacitor **725** in performing low-pass filtering. Therefore, filtering unit **723** in this embodiment compared to filtering unit **623** in FIG. **52**B has a better ability to filter out high-frequency components to output a filtered signal with a smoother waveform.

Inductance values of inductor **726** in the embodiment described above are chosen in some embodiments in the range of about 10 nH to about 10 mH. And capacitance values of capacitors **625**, **725**, and **727** in the embodiments described above are chosen in some embodiments in the range, for example, of about 100 pF to about 1 uF.

FIG. **52**D is a schematic diagram of the filtering unit according to an embodiment of the present invention. Referring to FIG. **52**D, filtering unit **824** includes a capacitor **825** and an inductor **828** connected in parallel. Capacitor **825** has an end coupled to pin **501**, and another end coupled to rectifying output terminal **511**, and is configured to high-pass filter an external driving signal input at pin **501**, so as to filter out low-frequency components of the external driving signal. Inductor **828** has an end coupled to pin **501** and another end coupled to rectifying output terminal **511**, and is configured to low-pass filter an external driving signal input at pin **501**, so as to filter out high-frequency components of the external driving signal. Therefore, the combination of capacitor **825** and inductor **828** works to present high impedance to an external driving signal at one or more specific frequencies. Thus, the parallel-connected capacitor and inductor work to present a peak equivalent impedance to the external driving signal at a specific frequency.

Through appropriately choosing a capacitance value of capacitor **825** and an inductance value of inductor **828**, a center frequency f on the high-impedance band may be set at a specific value given by

$$f = \frac{1}{2\pi\sqrt{LC}},$$

where L denotes inductance of inductor **828** and C denotes capacitance of capacitor **825**. The center frequency is in some embodiments in the range of about 20~30 kHz, and may be preferably about 25 kHz. And an LED lamp with filtering unit **824** is able to be certified under safety standards, for a specific center frequency, as provided by Underwriters Laboratories (UL).

It's worth noting that filtering unit **824** may further comprise a resistor **829**, coupled between pin **501** and filtering output terminal **511**. In FIG. **52**D, resistor **829** is connected in series to the parallel-connected capacitor **825** and inductor **828**. For example, resistor **829** may be coupled between pin **501** and parallel-connected capacitor **825** and inductor **828**, or may be coupled between filtering output terminal **511** and parallel-connected capacitor **825** and inductor **828**. In this embodiment, resistor **829** is coupled between pin **501** and parallel-connected capacitor **825** and inductor **828**. Further, resistor **829** is configured for adjusting the quality factor (Q) of the LC circuit comprising capacitor **825** and inductor **828**, to better adapt filtering unit **824** to application environments with different quality factor requirements. Since resistor **829** is an optional component, it is depicted in a dotted line in FIG. **52**D.

Capacitance values of capacitor **825** are in some embodiments in the range of about 10 nF-2 uF. Inductance values of inductor **828** are in some embodiments smaller than 2 mH, and may be preferably smaller than 1 mH. Resistance values of resistor **829** are in some embodiments larger than 50 ohms, and are may be preferably larger than 500 ohms.

Besides the filtering circuits shown and described in the above embodiments, traditional low-pass or band-pass filters can be used as the filtering unit in the filtering circuit in the present invention.

FIG. **52**E is a schematic diagram of the filtering unit according to an embodiment of the present invention. Referring to FIG. **52**E, in this embodiment filtering unit **925** is disposed in rectifying circuit **610** as shown in FIG. **50**A, and is configured for reducing the EMI (Electromagnetic interference) caused by rectifying circuit **610** and/or other circuits. In this embodiment, filtering unit **925** includes an EMI-reducing capacitor coupled between pin **501** and the anode of rectifying diode **613**, and also between pin **502** and the anode of rectifying diode **614**, to reduce the EMI associated with the positive half cycle of the AC driving signal received at pins **501** and **502**. The EMI-reducing capacitor of filtering unit **925** is also coupled between pin **501** and the cathode of rectifying diode **611**, and between pin **502** and the cathode of rectifying diode **612**, to reduce the EMI associated with the negative half cycle of the AC driving signal received at pins **501** and **502**. In some embodiments, rectifying circuit **610** comprises a full-wave bridge rectifier circuit including four rectifying diodes **611**, **612**, **613**, and **614**. The full-wave bridge rectifier circuit has a first filtering node connecting an anode and a cathode respectively of two diodes **613** and **611** of the four rectifying diodes **611**, **612**, **613**, and **614**, and a second filtering node connecting an anode and a cathode respectively of the other two diodes **614** and **612** of the four rectifying diodes **611**, **612**, **613**, and **614**. And the EMI-reducing capacitor of the filtering unit **925** is coupled between the first filtering node and the second filtering node.

Similarly, with reference to FIGS. **50**C, and **51**A-**51**C, any capacitor in each of the circuits in FIGS. **51**A-**51**C is coupled between pins **501** and **502** (or pins **503** and **504**) and any diode in FIG. **50**C, so any or each capacitor in FIGS. **51**A-**51**C can work as an EMI-reducing capacitor to achieve the function of reducing EMI. For example, rectifying circuit **510** in FIGS. **49**C and **49**E may comprise a half-wave rectifier circuit including two rectifying diodes and having a half-wave node connecting an anode and a cathode respectively of the two rectifying diodes, and any or each capacitor in FIGS. **51**A-**51**C may be coupled between the half-wave node and at least one of the first pin and the second pin. And rectifying circuit **540** in FIG. **49**E may comprise a half-wave rectifier circuit including two rectifying diodes and having a half-wave node connecting an anode and a cathode respectively of the two rectifying diodes, and any or each capacitor in FIGS. **51**A-**51**C may be coupled between the half-wave node and at least one of the third pin and the fourth pin.

It's worth noting that the EMI-reducing capacitor in the embodiment of FIG. **52**E may also act as capacitor **825** in filtering unit **824**, so that in combination with inductor **828** and the capacitor **825** performs the functions of reducing EMI and presenting high impedance to an external driving signal at specific frequencies. For example, when the rectifying circuit comprises a full-wave bridge rectifier circuit, capacitor **825** of filtering unit **824** may be coupled between the first filtering node and the second filtering node of the full-wave bridge rectifier circuit. When the rectifying circuit comprises a half-wave rectifier circuit, capacitor **825** of filtering unit **824** may be coupled between the half-wave node of the half-wave rectifier circuit and at least one of the first pin and the second pin.

FIG. **53**A is a schematic diagram of an LED module according to an embodiment of the present invention. Referring to FIG. **53**A, LED module **630** has an anode connected to the filtering output terminal **521**, has a cathode connected to the filtering output terminal **522**, and comprises at least one LED unit **632**. When two or more LED units are included, they are connected in parallel. The anode of each LED unit **632** is connected to the anode of LED module **630** and thus output terminal **521**, and the cathode of each LED unit **632** is connected to the cathode of LED module **630** and thus output terminal **522**. Each LED unit **632** includes at least one LED **631**. When multiple LEDs **631** are included in an LED unit **632**, they are connected in series, with the

anode of the first LED **631** connected to the anode of this LED unit **632**, and the cathode of the first LED **631** connected to the next or second LED **631**. And the anode of the last LED **631** in this LED unit **632** is connected to the cathode of a previous LED **631**, with the cathode of the last LED **631** connected to the cathode of this LED unit **632**.

It's worth noting that LED module **630** may produce a current detection signal S**531** reflecting a magnitude of current through LED module **630** and used for controlling or detecting on the LED module **630**.

FIG. **53**B is a schematic diagram of an LED module according to an embodiment of the present invention. Referring to FIG. **53**B, LED module **630** has an anode connected to the filtering output terminal **521**, has a cathode connected to the filtering output terminal **522**, and comprises at least two LED units **732**, with the anode of each LED unit **732** connected to the anode of LED module **630**, and the cathode of each LED unit **732** connected to the cathode of LED module **630**. Each LED unit **732** includes at least two LEDs **731** connected in the same way as described in FIG. **53**A. For example, the anode of the first LED **731** in an LED unit **732** is connected to the anode of this LED unit **732**, the cathode of the first LED **731** is connected to the anode of the next or second LED **731**, and the cathode of the last LED **731** is connected to the cathode of this LED unit **732**. Further, LED units **732** in an LED module **630** are connected to each other in this embodiment. All of the n-th LEDs **731** respectively of the LED units **732** are connected by every anode of every n-th LED **731** in the LED units **732**, and by every cathode of every n-th LED **731**, where n is a positive integer. In this way, the LEDs in LED module **630** in this embodiment are connected in the form of a mesh.

Compared to the embodiments of FIGS. **54**A-**54**G, LED driving module **530** of the above embodiments includes LED module **630**, but doesn't include a driving circuit for the LED module **630**.

Similarly, LED module **630** in this embodiment may produce a current detection signal S**531** reflecting a magnitude of current through LED module **630** and used for controlling or detecting on the LED module **630**.

In actual practice, the number of LEDs **731** included by an LED unit **732** is in some embodiments in the range of 15-25, and is may be preferably in the range of 18-22.

FIG. **53**C is a plan view of a circuit layout of the LED module according to an embodiment of the present invention. Referring to FIG. **53**C, in this embodiment LEDs **831** are connected in the same way as described in FIG. **53**B, and three LED units are assumed in LED module **630** and described as follows for illustration. A positive conductive line **834** and a negative conductive line **835** are to receive a driving signal, for supplying power to the LEDs **831**. For example, positive conductive line **834** may be coupled to the filtering output terminal **521** of the filtering circuit **520** described above, and negative conductive line **835** coupled to the filtering output terminal **522** of the filtering circuit **520**, to receive a filtered signal. For the convenience of illustration, all three of the n-th LEDs **831** respectively of the three LED units are grouped as an LED set **833** in FIG. **53**C.

Positive conductive line **834** connects the three first LEDs **831** respectively of the leftmost three LED units, at the anodes on the left sides of the three first LEDs **831** as shown in the leftmost LED set **833** of FIG. **53**C. Negative conductive line **835** connects the three last LEDs **831** respectively of the leftmost three LED units, at the cathodes on the right sides of the three last LEDs **831** as shown in the rightmost LED set **833** of FIG. **53**C. And of the three LED units, the cathodes of the three first LEDs **831**, the anodes of the three last LEDs **831**, and the anodes and cathodes of all the remaining LEDs **831** are connected by conductive lines or parts **839**.

For example, the anodes of the three LEDs **831** in the leftmost LED set **833** may be connected together by positive conductive line **834**, and their cathodes may be connected together by a leftmost conductive part **839**. The anodes of the three LEDs **831** in the second leftmost LED set **833** are also connected together by the leftmost conductive part **839**, whereas their cathodes are connected together by a second leftmost conductive part **839**. Since the cathodes of the three LEDs **831** in the leftmost LED set **833** and the anodes of the three LEDs **831** in the second leftmost LED set **833** are connected together by the same leftmost conductive part **839**, in each of the three LED units the cathode of the first LED **831** is connected to the anode of the next or second LED **831**, with the remaining LEDs **831** also being connected in the same way. Accordingly, all the LEDs **831** of the three LED units are connected to form the mesh as shown in FIG. **53**B.

It's worth noting that in this embodiment the length **836** of a portion of each conductive part **839** that immediately connects to the anode of an LED **831** is smaller than the length **837** of another portion of each conductive part **839** that immediately connects to the cathode of an LED **831**, making the area of the latter portion immediately connecting to the cathode larger than that of the former portion immediately connecting to the anode. The length **837** may be smaller than a length **838** of a portion of each conductive part **839** that immediately connects the cathode of an LED **831** and the anode of the next LED **831**, making the area of the portion of each conductive part **839** that immediately connects a cathode and an anode larger than the area of any other portion of each conductive part **839** that immediately connects to only a cathode or an anode of an LED **831**. Due to the length differences and area differences, this layout structure improves heat dissipation of the LEDs **831**.

In some embodiments, positive conductive line **834** includes a lengthwise portion **834***a*, and negative conductive line **835** includes a lengthwise portion **835***a*, which are conducive to making the LED module have a positive "+" connective portion and a negative "−" connective portion at each of the two ends of the LED module, as shown in FIG. **53**C. Such a layout structure allows for coupling any of other circuits of the power supply module of the LED lamp, including e.g. filtering circuit **520** and rectifying circuits **510** and **540**, to the LED module through the positive connective portion and/or the negative connective portion at each or both ends of the LED lamp. Thus the layout structure increases the flexibility in arranging actual circuits in the LED lamp.

FIG. **53**D is a plan view of a circuit layout of the LED module according to another embodiment of the present invention. Referring to FIG. **53**D, in this embodiment LEDs **931** are connected in the same way as described in FIG. **53**A, and three LED units each including 7 LEDs **931** are assumed in LED module **630** and described as follows for illustration. A positive conductive line **934** and a negative conductive line **935** are to receive a driving signal, for supplying power to the LEDs **931**. For example, positive conductive line **934** may be coupled to the filtering output terminal **521** of the filtering circuit **520** described above, and negative conductive line **935** coupled to the filtering output terminal **522** of the filtering circuit **520**, to receive a filtered signal. For the convenience of illustration, all seven LEDs **931** of each of

the three LED units are grouped as an LED set **932** in FIG. **53**D. Thus there are three LED sets **932** corresponding to the three LED units.

Positive conductive line **934** connects to the anode on the left side of the first or leftmost LED **931** of each of the three LED sets **932**. Negative conductive line **935** connects to the cathode on the right side of the last or rightmost LED **931** of each of the three LED sets **932**. In each LED set **932**, of two consecutive LEDs **931** the LED **931** on the left has a cathode connected by a conductive part **939** to an anode of the LED **931** on the right. By such a layout, the LEDs **931** of each LED set **932** are connected in series.

It's also worth noting that a conductive part **939** may be used to connect an anode and a cathode respectively of two consecutive LEDs **931**. Negative conductive line **935** connects to the cathode of the last or rightmost LED **931** of each of the three LED sets **932**. And positive conductive line **934** connects to the anode of the first or leftmost LED **931** of each of the three LED sets **932**. Therefore, as shown in FIG. **53**D, the length (and thus area) of the conductive part **939** is larger than that of the portion of negative conductive line **935** immediately connecting to a cathode, which length (and thus area) is then larger than that of the portion of positive conductive line **934** immediately connecting to an anode. For example, the length **938** of the conductive part **939** may be larger than the length **937** of the portion of negative conductive line **935** immediately connecting to a cathode of an LED **931**, which length **937** is then larger than the length **936** of the portion of positive conductive line **934** immediately connecting to an anode of an LED **931**. Such a layout structure improves heat dissipation of the LEDs **931** in LED module **630**.

Positive conductive line **934** may include a lengthwise portion **934***a*, and negative conductive line **935** may include a lengthwise portion **935***a*, which are conducive to making the LED module have a positive "+" connective portion and a negative "−" connective portion at each of the two ends of the LED module, as shown in FIG. **53**D. Such a layout structure allows for coupling any of other circuits of the power supply module of the LED lamp, including e.g. filtering circuit **520** and rectifying circuits **510** and **540**, to the LED module through the positive connective portion **934***a* and/or the negative connective portion **935***a* at each or both ends of the LED lamp. Thus the layout structure increases the flexibility in arranging actual circuits in the LED lamp.

Further, the circuit layouts as shown in FIGS. **53**C and **53**D may be implemented with a bendable circuit sheet or substrate, which may even be called flexible circuit board depending on its specific definition used. For example, the bendable circuit sheet may comprise one conductive layer where positive conductive line **834**, positive lengthwise portion **834***a*, negative conductive line **835**, negative lengthwise portion **835***a*, and conductive parts **839** shown in FIG. **53**C, and positive conductive line **934**, positive lengthwise portion **934***a*, negative conductive line **935**, negative lengthwise portion **935***a*, and conductive parts **939** shown in FIG. **53**D are formed by the method of etching.

FIG. **53**E is a plan view of a circuit layout of the LED module according to another embodiment of the present invention. The layout structures of the LED module in FIGS. **53**E and **53**C each correspond to the same way of connecting LEDs **831** as that shown in FIG. **53**B, but the layout structure in FIG. **53**E comprises two conductive layers, instead of only one conductive layer for forming the circuit layout as shown in FIG. **53**C. Referring to FIG. **53**E, the main difference from the layout in FIG. **53**C is that positive conductive line **834** and negative conductive line **835** have a lengthwise portion **834***a* and a lengthwise portion **835***a*, respectively, that are formed in a second conductive layer instead. The difference is elaborated as follows.

Referring to FIG. **53**E, the bendable circuit sheet of the LED module comprises a first conductive layer **2***a* and a second conductive layer **2***c* electrically insulated from each other by a dielectric layer **2***b* (not shown). Of the two conductive layers, positive conductive line **834**, negative conductive line **835**, and conductive parts **839** in FIG. **53**E are formed in first conductive layer **2***a* by the method of etching for electrically connecting the plurality of LED components **831** e.g. in a form of a mesh, whereas positive lengthwise portion **834***a* and negative lengthwise portion **835***a* are formed in second conductive layer **2***c* by etching for electrically connecting to (the filtering output terminal of) the filtering circuit. Further, positive conductive line **834** and negative conductive line **835** in first conductive layer **2***a* have via points **834***b* and via points **835***b*, respectively, for connecting to second conductive layer **2***c*. And positive lengthwise portion **834***a* and negative lengthwise portion **835***a* in second conductive layer **2***c* have via points **834***c* and via points **835***c*, respectively. Via points **834***b* are positioned corresponding to via points **834***c*, for connecting positive conductive line **834** and positive lengthwise portion **834***a*. Via points **835***b* are positioned corresponding to via points **835***c*, for connecting negative conductive line **835** and negative lengthwise portion **835***a*. A preferable way of connecting the two conductive layers is to form a hole connecting each via point **834***b* and a corresponding via point **834***c*, and to form a hole connecting each via point **835***b* and a corresponding via point **835***c*, with the holes extending through the two conductive layers and the dielectric layer in-between. And positive conductive line **834** and positive lengthwise portion **834***a* can be electrically connected by welding metallic part(s) through the connecting hole(s), and negative conductive line **835** and negative lengthwise portion **835***a* can be electrically connected by welding metallic part(s) through the connecting hole(s).

Similarly, the layout structure of the LED module in FIG. **53**D may alternatively have positive lengthwise portion **934***a* and negative lengthwise portion **935***a* disposed in a second conductive layer, to constitute a two-layer layout structure.

It's worth noting that the thickness of the second conductive layer of a two-layer bendable circuit sheet is in some embodiments larger than that of the first conductive layer, in order to reduce the voltage drop or loss along each of the positive lengthwise portion and the negative lengthwise portion disposed in the second conductive layer. Compared to a one-layer bendable circuit sheet, since a positive lengthwise portion and a negative lengthwise portion are disposed in a second conductive layer in a two-layer bendable circuit sheet, the width (between two lengthwise sides) of the two-layer bendable circuit sheet is or can be reduced.

On the same fixture or plate in a production process, the number of bendable circuit sheets each with a shorter width that can be laid together at most is larger than the number of bendable circuit sheets each with a longer width that can be laid together at most. Thus adopting a bendable circuit sheet with a shorter width can increase the efficiency of production of the LED module. And reliability in the production process, such as the accuracy of welding position when welding (materials on) the LED components, can also be improved, because a two-layer bendable circuit sheet can better maintain its shape.

As a variant of the above embodiments, a type of LED tube lamp is provided that has at least some of the electronic components of its power supply module disposed on a light strip of the LED tube lamp. For example, the technique of printed electronic circuit (PEC) can be used to print, insert, or embed at least some of the electronic components onto the light strip.

In one embodiment, all electronic components of the power supply module are disposed on the light strip. The production process may include or proceed with the following steps: preparation of the circuit substrate (e.g. preparation of a flexible printed circuit board); ink jet printing of metallic nano-ink; ink jet printing of active and passive components (as of the power supply module); drying/sintering; ink jet printing of interlayer bumps; spraying of insulating ink; ink jet printing of metallic nano-ink; ink jet printing of active and passive components (to sequentially form the included layers); spraying of surface bond pad(s); and spraying of solder resist against LED components.

In certain embodiments, if all electronic components of the power supply module are disposed on the light strip, electrical connection between terminal pins of the LED tube lamp and the light strip may be achieved by connecting the pins to conductive lines which are welded with ends of the light strip. In this case, another substrate for supporting the power supply module is not required, thereby allowing of an improved design or arrangement in the end cap(s) of the LED tube lamp. In some embodiments, (components of) the power supply module are disposed at two ends of the light strip, in order to significantly reduce the impact of heat generated from the power supply module's operations on the LED components.

Since no substrate other than the light strip is used to support the power supply module in this case, the total amount of welding or soldering can be significantly reduced, improving the general reliability of the power supply module.

Another case is that some of all electronic components of the power supply module, such as some resistors and/or smaller size capacitors, are printed onto the light strip, and some bigger size components, such as some inductors and/or electrolytic capacitors, are disposed in the end cap(s). The production process of the light strip in this case may be the same as that described above. And in this case disposing some of all electronic components on the light strip is conducive to achieving a reasonable layout of the power supply module in the LED tube lamp, which may allow of an improved design in the end cap(s).

As a variant embodiment of the above, electronic components of the power supply module may be disposed on the light strip by a method of embedding or inserting, e.g. by embedding the components onto a bendable or flexible light strip. In some embodiments, this embedding may be realized by a method using copper-clad laminates (CCL) for forming a resistor or capacitor; a method using ink related to silkscreen printing; or a method of ink jet printing to embed passive components, wherein an ink jet printer is used to directly print inks to constitute passive components and related functionalities to intended positions on the light strip. Then through treatment by ultraviolet (UV) light or drying/sintering, the light strip is formed where passive components are embedded. The electronic components embedded onto the light strip include for example resistors, capacitors, and inductors. In other embodiments, active components also may be embedded. Through embedding some components onto the light strip, a reasonable layout of the power supply module can be achieved to allow of an improved design in the end cap(s), because the surface area on a printed circuit board used for carrying components of the power supply module is reduced or smaller, and as a result the size, weight, and thickness of the resulting printed circuit board for carrying components of the power supply module is also smaller or reduced. Also in this situation since welding points on the printed circuit board for welding resistors and/or capacitors if they were not to be disposed on the light strip are no longer used, the reliability of the power supply module is improved, in view of the fact that these welding points are most liable to (cause or incur) faults, malfunctions, or failures. Further, the length of conductive lines needed for connecting components on the printed circuit board is therefore also reduced, which allows of a more compact layout of components on the printed circuit board and thus improving the functionalities of these components.

Next, methods to produce embedded capacitors and resistors are explained as follows.

Usually, methods for manufacturing embedded capacitors employ or involve a concept called distributed or planar capacitance. The manufacturing process may include the following step(s). On a substrate of a copper layer a very thin insulation layer is applied or pressed, which is then generally disposed between a pair of layers including a power conductive layer and a ground layer. The very thin insulation layer makes the distance between the power conductive layer and the ground layer very short. A capacitance resulting from this structure can also be realized by a conventional technique of a plated-through hole. Basically, this step is used to create this structure comprising a big parallel-plate capacitor on a circuit substrate.

Of products of high electrical capacity, certain types of products employ distributed capacitances, and other types of products employ separate embedded capacitances. Through putting or adding a high dielectric-constant material such as barium titanate into the insulation layer, the high electrical capacity is achieved.

A usual method for manufacturing embedded resistors employ conductive or resistive adhesive. This may include, for example, a resin to which conductive carbon or graphite is added, which may be used as an additive or filler. The additive resin is silkscreen printed to an object location, and is then after treatment laminated inside the circuit board. The resulting resistor is connected to other electronic components through plated-through holes or microvias. Another method is called Ohmega-Ply, by which a two metallic layer structure of a copper layer and a thin nickel alloy layer constitutes a layer resistor relative to a substrate. Then through etching the copper layer and nickel alloy layer, different types of nickel alloy resistors with copper terminals can be formed. These types of resistor are each laminated inside the circuit board.

In an embodiment, conductive wires/lines are directly printed in a linear layout on an inner surface of the LED glass lamp tube, with LED components directly attached on the inner surface and electrically connected by the conductive wires. In some embodiments, the LED components in the form of chips are directly attached over the conductive wires on the inner surface, and connective points are at terminals of the wires for connecting the LED components and the power supply module. After being attached, the LED chips may have fluorescent powder applied or dropped thereon, for producing white light or light of other color by the operating LED tube lamp.

In some embodiments, luminous efficacy of the LED or LED component is 80 lm/W or above, and in some embodiments, it may be preferably 120 lm/W or above. Certain

more optimal embodiments may include a luminous efficacy of the LED or LED component of 160 lm/W or above. White light emitted by an LED component in the invention may be produced by mixing fluorescent powder with the monochromatic light emitted by a monochromatic LED chip. The white light in its spectrum has major wavelength ranges of 430-460 nm and 550-560 nm, or major wavelength ranges of 430-460 nm, 540-560 nm, and 620-640 nm.

FIG. **54**A is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. As shown in FIG. **54**A, the power supply module of the LED lamp includes rectifying circuits **510** and **540**, a filtering circuit **520**, and an LED driving module **530**. LED driving module **530** in this embodiment comprises a driving circuit **1530** and an LED module **630**. According to the above description in FIG. **49**E, driving circuit **1530** in FIG. **54**A comprises a DC-to-DC converter circuit, and is coupled to filtering output terminals **521** and **522** to receive a filtered signal and then perform power conversion for converting the filtered signal into a driving signal at driving output terminals **1521** and **1522**. The LED module **630** is coupled to driving output terminals **1521** and **1522** to receive the driving signal for emitting light. In some embodiments, the current of LED module **630** is stabilized at an objective current value. Descriptions of this LED module **630** are the same as those provided above with reference to FIGS. **53**A-**53**D.

It's worth noting that rectifying circuit **540** is an optional element and therefore can be omitted, so it is depicted in a dotted line in FIG. **54**A. Accordingly, LED driving module **530** in embodiments of FIGS. **54**A, **54**C, and **54**E may comprise a driving circuit **1530** and an LED module **630**. Therefore, the power supply module of the LED lamp in this embodiment can be used with a single-end power supply coupled to one end of the LED lamp, and can be used with a dual-end power supply coupled to two ends of the LED lamp. With a single-end power supply, examples of the LED lamp include an LED light bulb, a personal area light (PAL), etc.

FIG. **54**B is a block diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**B, the driving circuit includes a controller **1531**, and a conversion circuit **1532** for power conversion based on a current source, for driving the LED module to emit light. Conversion circuit **1532** includes a switching circuit **1535** and an energy storage circuit **1538**. And conversion circuit **1532** is coupled to filtering output terminals **521** and **522** to receive and then convert a filtered signal, under the control by controller **1531**, into a driving signal at driving output terminals **1521** and **1522** for driving the LED module. Under the control by controller **1531**, the driving signal output by conversion circuit **1532** comprises a steady current, making the LED module emitting steady light.

FIG. **54**C is a schematic diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**C, a driving circuit **1630** in this embodiment comprises a buck DC-to-DC converter circuit having a controller **1631** and a converter circuit. The converter circuit includes an inductor **1632**, a diode **1633** for "freewheeling" of current, a capacitor **1634**, and a switch **1635**. Driving circuit **1630** is coupled to filtering output terminals **521** and **522** to receive and then convert a filtered signal into a driving signal for driving an LED module connected between driving output terminals **1521** and **1522**.

In this embodiment, switch **1635** comprises a metal-oxide-semiconductor field-effect transistor (MOSFET) and has a first terminal coupled to the anode of freewheeling diode **1633**, a second terminal coupled to filtering output terminal **522**, and a control terminal coupled to controller **1631** used for controlling current conduction or cutoff between the first and second terminals of switch **1635**. Driving output terminal **1521** is connected to filtering output terminal **521**, and driving output terminal **1522** is connected to an end of inductor **1632**, which has another end connected to the first terminal of switch **1635**. Capacitor **1634** is coupled between driving output terminals **1521** and **1522**, to stabilize the voltage between driving output terminals **1521** and **1522**. Freewheeling diode **1633** has a cathode connected to driving output terminal **1521**.

Next, a description follows as to an exemplary operation of driving circuit **1630**.

Controller **1631** is configured for determining when to turn switch **1635** on (in a conducting state) or off (in a cutoff state), according to a current detection signal S**535** and/or a current detection signal S**531**. For example, in some embodiments, controller **1631** is configured to control the duty cycle of switch **1635** being on and switch **1635** being off, in order to adjust the size or magnitude of the driving signal. Current detection signal S**535** represents the magnitude of current through switch **1635**. Current detection signal S**531** represents the magnitude of current through the LED module coupled between driving output terminals **1521** and **1522**.

According to any of current detection signal S**535** and current detection signal S**531**, controller **1631** can obtain information on the magnitude of power converted by the converter circuit. When switch **1635** is switched on, a current of a filtered signal is input through filtering output terminal **521**, and then flows through capacitor **1634**, driving output terminal **1521**, the LED module, inductor **1632**, and switch **1635**, and then flows out from filtering output terminal **522**. During this flowing of current, capacitor **1634** and inductor **1632** are performing storing of energy. On the other hand, when switch **1635** is switched off, capacitor **1634** and inductor **1632** perform releasing of stored energy by a current flowing from freewheeling capacitor **1633** to driving output terminal **1521** to make the LED module continuing to emit light.

It's worth noting that capacitor **1634** is an optional element, so it can be omitted and is thus depicted in a dotted line in FIG. **54**C. In some application environments, the natural characteristic of an inductor to oppose instantaneous change in electric current passing through the inductor may be used to achieve the effect of stabilizing the current through the LED module, thus omitting capacitor **1634**.

FIG. **54**D is a schematic diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**D, a driving circuit **1730** in this embodiment comprises a boost DC-to-DC converter circuit having a controller **1731** and a converter circuit. The converter circuit includes an inductor **1732**, a diode **1733** for "freewheeling" of current, a capacitor **1734**, and a switch **1735**. Driving circuit **1730** is configured to receive and then convert a filtered signal from filtering output terminals **521** and **522** into a driving signal for driving an LED module coupled between driving output terminals **1521** and **1522**.

Inductor **1732** has an end connected to filtering output terminal **521**, and another end connected to the anode of freewheeling diode **1733** and a first terminal of switch **1735**, which has a second terminal connected to filtering output terminal **522** and driving output terminal **1522**. Freewheeling diode **1733** has a cathode connected to driving output terminal **1521**. And capacitor **1734** is coupled between driving output terminals **1521** and **1522**.

Controller **1731** is coupled to a control terminal of switch **1735**, and is configured for determining when to turn switch **1735** on (in a conducting state) or off (in a cutoff state), according to a current detection signal S**535** and/or a current detection signal S**531**. When switch **1735** is switched on, a current of a filtered signal is input through filtering output terminal **521**, and then flows through inductor **1732** and switch **1735**, and then flows out from filtering output terminal **522**. During this flowing of current, the current through inductor **1732** increases with time, with inductor **1732** being in a state of storing energy, while capacitor **1734** enters a state of releasing energy, making the LED module continuing to emit light. On the other hand, when switch **1735** is switched off, inductor **1732** enters a state of releasing energy as the current through inductor **1732** decreases with time. In this state, the current through inductor **1732** then flows through freewheeling diode **1733**, capacitor **1734**, and the LED module, while capacitor **1734** enters a state of storing energy.

It's worth noting that capacitor **1734** is an optional element, so it can be omitted and is thus depicted in a dotted line in FIG. **54**D. When capacitor **1734** is omitted and switch **1735** is switched on, the current of inductor **1732** does not flow through the LED module, making the LED module not emit light; but when switch **1735** is switched off, the current of inductor **1732** flows through freewheeling diode **1733** to reach the LED module, making the LED module emit light. Therefore, by controlling the time that the LED module emits light, and the magnitude of current through the LED module, the average luminance of the LED module can be stabilized to be above a defined value, thus also achieving the effect of emitting a steady light.

FIG. **54**E is a schematic diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**E, a driving circuit **1830** in this embodiment comprises a buck DC-to-DC converter circuit having a controller **1831** and a converter circuit. The converter circuit includes an inductor **1832**, a diode **1833** for "freewheeling" of current, a capacitor **1834**, and a switch **1835**. Driving circuit **1830** is coupled to filtering output terminals **521** and **522** to receive and then convert a filtered signal into a driving signal for driving an LED module connected between driving output terminals **1521** and **1522**.

Switch **1835** has a first terminal coupled to filtering output terminal **521**, a second terminal coupled to the cathode of freewheeling diode **1833**, and a control terminal coupled to controller **1831** to receive a control signal from controller **1831** for controlling current conduction or cutoff between the first and second terminals of switch **1835**. The anode of freewheeling diode **1833** is connected to filtering output terminal **522** and driving output terminal **1522**. Inductor **1832** has an end connected to the second terminal of switch **1835**, and another end connected to driving output terminal **1521**. Capacitor **1834** is coupled between driving output terminals **1521** and **1522**, to stabilize the voltage between driving output terminals **1521** and **1522**.

Controller **1831** is configured for controlling when to turn switch **1835** on (in a conducting state) or off (in a cutoff state), according to a current detection signal S**535** and/or a current detection signal S**531**. When switch **1835** is switched on, a current of a filtered signal is input through filtering output terminal **521**, and then flows through switch **1835**, inductor **1832**, and driving output terminals **1521** and **1522**, and then flows out from filtering output terminal **522**. During this flowing of current, the current through inductor **1832** and the voltage of capacitor **1834** both increase with time, so inductor **1832** and capacitor **1834** are in a state of storing energy. On the other hand, when switch **1835** is switched off, inductor **1832** is in a state of releasing energy and thus the current through it decreases with time. In this case, the current through inductor **1832** circulates through driving output terminals **1521** and **1522**, freewheeling diode **1833**, and back to inductor **1832**.

It's worth noting that capacitor **1834** is an optional element, so it can be omitted and is thus depicted in a dotted line in FIG. **54**E. When capacitor **1834** is omitted, no matter whether switch **1835** is turned on or off, the current through inductor **1832** will flow through driving output terminals **1521** and **1522** to drive the LED module to continue emitting light.

FIG. **54**F is a schematic diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**F, a driving circuit **1930** in this embodiment comprises a buck DC-to-DC converter circuit having a controller **1931** and a converter circuit. The converter circuit includes an inductor **1932**, a diode **1933** for "freewheeling" of current, a capacitor **1934**, and a switch **1935**. Driving circuit **1930** is coupled to filtering output terminals **521** and **522** to receive and then convert a filtered signal into a driving signal for driving an LED module connected between driving output terminals **1521** and **1522**.

Inductor **1932** has an end connected to filtering output terminal **521** and driving output terminal **1522**, and another end connected to a first end of switch **1935**. Switch **1935** has a second end connected to filtering output terminal **522**, and a control terminal connected to controller **1931** to receive a control signal from controller **1931** for controlling current conduction or cutoff of switch **1935**. Freewheeling diode **1933** has an anode coupled to a node connecting inductor **1932** and switch **1935**, and a cathode coupled to driving output terminal **1521**. Capacitor **1934** is coupled to driving output terminals **1521** and **1522**, to stabilize the driving of the LED module coupled between driving output terminals **1521** and **1522**.

Controller **1931** is configured for controlling when to turn switch **1935** on (in a conducting state) or off (in a cutoff state), according to a current detection signal S**531** and/or a current detection signal S**535**. When switch **1935** is turned on, a current is input through filtering output terminal **521**, and then flows through inductor **1932** and switch **1935**, and then flows out from filtering output terminal **522**. During this flowing of current, the current through inductor **1932** increases with time, so inductor **1932** is in a state of storing energy; but the voltage of capacitor **1934** decreases with time, so capacitor **1934** is in a state of releasing energy to keep the LED module continuing to emit light. On the other hand, when switch **1935** is turned off, inductor **1932** is in a state of releasing energy and its current decreases with time. In this case, the current through inductor **1932** circulates through freewheeling diode **1933**, driving output terminals **1521** and **1522**, and back to inductor **1932**. During this circulation, capacitor **1934** is in a state of storing energy and its voltage increases with time.

It's worth noting that capacitor **1934** is an optional element, so it can be omitted and is thus depicted in a dotted line in FIG. **54**F. When capacitor **1934** is omitted and switch **1935** is turned on, the current through inductor **1932** doesn't flow through driving output terminals **1521** and **1522**, thereby making the LED module not emit light. On the other hand, when switch **1935** is turned off, the current through inductor **1932** flows through freewheeling diode **1933** and then the LED module to make the LED module emit light. Therefore, by controlling the time that the LED module emits light, and the magnitude of current through the LED

module, the average luminance of the LED module can be stabilized to be above a defined value, thus also achieving the effect of emitting a steady light.

FIG. **54**G is a block diagram of the driving circuit according to an embodiment of the present invention. Referring to FIG. **54**G, the driving circuit includes a controller **2631**, and a conversion circuit **2632** for power conversion based on an adjustable current source, for driving the LED module to emit light. Conversion circuit **2632** includes a switching circuit **2635** and an energy storage circuit **2638**. And conversion circuit **2632** is coupled to filtering output terminals **521** and **522** to receive and then convert a filtered signal, under the control by controller **2631**, into a driving signal at driving output terminals **1521** and **1522** for driving the LED module. Controller **2631** is configured to receive a current detection signal S**535** and/or a current detection signal S**539**, for controlling or stabilizing the driving signal output by conversion circuit **2632** to be above an objective current value. Current detection signal S**535** represents the magnitude of current through switching circuit **2635**. Current detection signal S**539** represents the magnitude of current through energy storage circuit **2638**, which current may be e.g. an inductor current in energy storage circuit **2638** or a current output at driving output terminal **1521**. Any of current detection signal S**535** and current detection signal S**539** can represent the magnitude of current Iout provided by the driving circuit from driving output terminals **1521** and **1522** to the LED module. Controller **2631** is coupled to filtering output terminal **521** for setting the objective current value according to the voltage Vin at filtering output terminal **521**. Therefore, the current Iout provided by the driving circuit or the objective current value can be adjusted corresponding to the magnitude of the voltage Vin of a filtered signal output by a filtering circuit. It's worth noting that current detection signals S**535** and S**539** can be generated by measuring current through a resistor or induced by an inductor. For example, a current can be measured according to a voltage drop across a resistor in conversion circuit **2632** the current flows through, or which arises from a mutual induction between an inductor in conversion circuit **2632** and another inductor in its energy storage circuit **2638**.

The above driving circuit structures are especially suitable for an application environment in which the external driving circuit for the LED tube lamp includes electronic ballast. An electronic ballast is equivalent to a current source whose output power is not constant. In an internal driving circuit as shown in each of FIGS. **54**C-**54**F, power consumed by the internal driving circuit relates to or depends on the number of LEDs in the LED module, and could be regarded as constant. When the output power of the electronic ballast is higher than power consumed by the LED module driven by the driving circuit, the output voltage of the ballast will increase continually, causing the level of an AC driving signal received by the power supply module of the LED lamp to continually increase, so as to risk damaging the ballast and/or components of the power supply module due to their voltage ratings being exceeded. On the other hand, when the output power of the electronic ballast is lower than power consumed by the LED module driven by the driving circuit, the output voltage of the ballast and the level of the AC driving signal will decrease continually so that the LED tube lamp fail to normally operate.

It's worth noting that the power needed for an LED lamp to work is already lower than that needed for a fluorescent lamp to work. If a conventional control mechanism of e.g. using a backlight module to control the LED luminance is used with a conventional driving system of e.g. a ballast, a problem will probably arise of mismatch or incompatibility between the output power of the external driving system and the power needed by the LED lamp. This problem may even cause damaging of the driving system and/or the LED lamp. To prevent this problem, using e.g. the power/current adjustment method described above in FIG. **54**G enables the LED (tube) lamp to be better compatible with traditional fluorescent lighting system.

FIG. **54**H is a graph illustrating the relationship between the voltage Vin and the objective current value Iout according to an embodiment of the present invention. In FIG. **54**H, the variable Vin is on the horizontal axis, and the variable Iout is on the vertical axis. In some cases, when the level of the voltage Vin of a filtered signal is between the upper voltage limit VH and the lower voltage limit VL, the objective current value Iout will be about an initial objective current value. The upper voltage limit VH is higher than the lower voltage limit VL. When the voltage Vin increases to be higher than the upper voltage limit VH, the objective current value Iout will increase with the increasing of the voltage Vin. During this stage, a situation that may be preferable is that the slope of the relationship curve increase with the increasing of the voltage Vin. When the voltage Vin of a filtered signal decreases to be below the lower voltage limit VL, the objective current value Iout will decrease with the decreasing of the voltage Vin. During this stage, a situation that may be preferable is that the slope of the relationship curve decrease with the decreasing of the voltage Vin. For example, during the stage when the voltage Vin is higher than the upper voltage limit VH or lower than the lower voltage limit VL, the objective current value Iout is in some embodiments a function of the voltage Vin to the power of 2 or above, in order to make the rate of increase/decrease of the consumed power higher than the rate of increase/decrease of the output power of the external driving system. Thus, adjustment of the objective current value Iout is in some embodiments a function of the filtered voltage Vin to the power of 2 or above.

In another case, when the voltage Vin of a filtered signal is between the upper voltage limit VH and the lower voltage limit VL, the objective current value Iout of the LED lamp will vary, increase or decrease, linearly with the voltage Vin. During this stage, when the voltage Vin is at the upper voltage limit VH, the objective current value Iout will be at the upper current limit IH. When the voltage Vin is at the lower voltage limit VL, the objective current value Iout will be at the lower current limit IL. The upper current limit IH is larger than the lower current limit IL. And when the voltage Vin is between the upper voltage limit VH and the lower voltage limit VL, the objective current value Iout will be a function of the voltage Vin to the power of 1.

With the designed relationship in FIG. **54**H, when the output power of the ballast is higher than the power consumed by the LED module driven by the driving circuit, the voltage Vin will increase with time to exceed the upper voltage limit VH. When the voltage Vin is higher than the upper voltage limit VH, the rate of increase of the consumed power of the LED module is higher than that of the output power of the electronic ballast, and the output power and the consumed power will be balanced or equal when the voltage Vin is at a high balance voltage value VH+ and the current Iout is at a high balance current value IH+. In this case, the high balance voltage value VH+ is larger than the upper voltage limit VH, and the high balance current value IH+ is larger than the upper current limit IH. On the other hand, when the output power of the ballast is lower than the power

consumed by the LED module driven by the driving circuit, the voltage Vin will decrease to be below the lower voltage limit VL. When the voltage Vin is lower than the lower voltage limit VL, the rate of decrease of the consumed power of the LED module is higher than that of the output power of the electronic ballast, and the output power and the consumed power will be balanced or equal when the voltage Vin is at a low balance voltage value VL− and the objective current value Iout is at a low balance current value IL−. In this case, the low balance voltage value VL− is smaller than the lower voltage limit VL, and the low balance current value IL− is smaller than the lower current limit IL.

In some embodiments, the lower voltage limit VL is defined to be around 90% of the lowest output power of the electronic ballast, and the upper voltage limit VH is defined to be around 110% of its highest output power. Taking a common AC powerline with a voltage range of 100-277 volts and a frequency of 60 Hz as an example, the lower voltage limit VL may be set at 90 volts (=100*90%), and the upper voltage limit VH may be set at 305 volts (=277*110%).

With reference to FIGS. **35** and **36**, a short circuit board **253** includes a first short circuit substrate and a second short circuit substrate respectively connected to two terminal portions of a long circuit sheet **251**, and electronic components of the power supply module are respectively disposed on the first short circuit substrate and the second short circuit substrate. The first short circuit substrate and the second short circuit substrate may have roughly the same length, or different lengths. In general, the first short circuit substrate (i.e. the right circuit substrate of short circuit board **253** in FIG. **35** and the left circuit substrate of short circuit board **253** in FIG. **36**) has a length that is about 30%-80% of the length of the second short circuit substrate (i.e. the left circuit substrate of short circuit board **253** in FIG. **35** and the right circuit substrate of short circuit board **253** in FIG. **36**). In some embodiments the length of the first short circuit substrate is about ⅓~⅔ of the length of the second short circuit substrate. For example, in one embodiment, the length of the first short circuit substrate may be about half the length of the second short circuit substrate. The length of the second short circuit substrate may be, for example in the range of about 15 mm to about 65 mm, depending on actual application occasions. In certain embodiments, the first short circuit substrate is disposed in an end cap at an end of the LED tube lamp, and the second short circuit substrate is disposed in another end cap at the opposite end of the LED tube lamp.

For example, capacitors of the driving circuit, such as capacitors **1634**, **1734**, **1834**, and **1934** in FIGS. **54**C-**54**F, in practical use may include two or more capacitors connected in parallel. Some or all capacitors of the driving circuit in the power supply module may be arranged on the first short circuit substrate of short circuit board **253**, while other components such as the rectifying circuit, filtering circuit, inductor(s) of the driving circuit, controller(s), switch(es), diodes, etc. are arranged on the second short circuit substrate of short circuit board **253**. Since inductors, controllers, switches, etc. are electronic components with higher temperature, arranging some or all capacitors on a circuit substrate separate or away from the circuit substrate(s) of high-temperature components helps prevent the working life of capacitors (especially electrolytic capacitors) from being negatively affected by the high-temperature components, thus improving the reliability of the capacitors. Further, the physical separation between the capacitors and both the rectifying circuit and filtering circuit also contributes to reducing the problem of EMI.

In some embodiments, the driving circuit has power conversion efficiency of 80% or above, which may preferably be 90% or above, and may even more preferably be 92% or above. Therefore, without the driving circuit, luminous efficacy of the LED lamp according to some embodiments may preferably be 120 lm/W or above, and may even more preferably be 160 lm/W or above. On the other hand, with the driving circuit in combination with the LED component(s), luminous efficacy of the LED lamp in the invention may preferably be, in some embodiments, 120 lm/W*90%=108 lm/W or above, and may even more preferably be, in some embodiments 160 lm/W*92%=147.2 lm/W or above.

In view of the fact that the diffusion film or layer in an LED tube lamp has light transmittance of 85% or above, luminous efficacy of the LED tube lamp of the invention is in some embodiments 108 lm/W*85%=91.8 lm/W or above, and may be, in some more effective embodiments, 147.2 lm/W*85%=125.12 lm/W.

FIG. **55**A is a block diagram of using a power supply module in an LED lamp according to an embodiment of the present invention. Compared to FIG. **54**A, the embodiment of FIG. **55**A includes rectifying circuits **510** and **540**, a filtering circuit **520**, and an LED driving module **530**, and further includes an anti-flickering circuit **550** coupled between filtering circuit **520** and LED driving module **530**. It's noted that rectifying circuit **540** may be omitted and is thus depicted in a dotted line in FIG. **55**A.

Anti-flickering circuit **550** is coupled to filtering output terminals **521** and **522**, to receive a filtered signal, and under specific circumstances to consume partial energy of the filtered signal so as to reduce (the incidence of) ripples of the filtered signal disrupting or interrupting the light emission of the LED driving module **530**. In general, filtering circuit **520** has such filtering components as resistor(s) and/or inductor(s), and/or parasitic capacitors and inductors, which may form resonant circuits. Upon breakoff or stop of an AC power signal, as when the power supply of the LED lamp is turned off by a user, the amplitude(s) of resonant signals in the resonant circuits will decrease with time. But LEDs in the LED module of the LED lamp are unidirectional conduction devices and require a minimum conduction voltage for the LED module. When a resonant signal's trough value is lower than the minimum conduction voltage of the LED module, but its peak value is still higher than the minimum conduction voltage, the flickering phenomenon will occur in light emission of the LED module. In this case anti-flickering circuit **550** works by allowing a current matching a defined flickering current value of the LED component to flow through, consuming partial energy of the filtered signal which should be higher than the energy difference of the resonant signal between its peak and trough values, so as to reduce the flickering phenomenon. In certain embodiments, a preferred occasion for anti-flickering circuit **550** to work is when the filtered signal's voltage approaches (and is still higher than) the minimum conduction voltage.

It's worth noting that anti-flickering circuit **550** may be more suitable for the situation in which LED driving module **530** doesn't include driving circuit **1530**, for example, when LED module **630** of LED driving module **530** is (directly) driven to emit light by a filtered signal from a filtering circuit. In this case, the light emission of LED module **630** will directly reflect variation in the filtered signal due to its ripples. In this situation, the introduction of anti-flickering

circuit **550** will prevent the flickering phenomenon from occurring in the LED lamp upon the breakoff of power supply to the LED lamp.

FIG. **55**B is a schematic diagram of the anti-flickering circuit according to an embodiment of the present invention. Referring to FIG. **55**B, anti-flickering circuit **650** includes at least a resistor, such as two resistors connected in series between filtering output terminals **521** and **522**. In this embodiment, anti-flickering circuit **650** in use consumes partial energy of a filtered signal continually. When in normal operation of the LED lamp, this partial energy is far lower than the energy consumed by LED driving module **530**. But upon a breakoff or stop of the power supply, when the voltage level of the filtered signal decreases to approach the minimum conduction voltage of LED module **630**, this partial energy is still consumed by anti-flickering circuit **650** in order to offset the impact of the resonant signals which may cause the flickering of light emission of LED module **630**. In some embodiments, a current equal to or larger than an anti-flickering current level may be set to flow through anti-flickering circuit **650** when LED module **630** is supplied by the minimum conduction voltage, and then an equivalent anti-flickering resistance of anti-flickering circuit **650** can be determined based on the set current.

FIG. **56**A is a block diagram of using a power supply module in an LED lamp according to an embodiment of the present invention. Compared to FIG. **55**A, the embodiment of FIG. **56**A includes rectifying circuits **510** and **540**, a filtering circuit **520**, an LED driving module **530**, and an anti-flickering circuit **550**, and further includes a protection circuit **560**. Protection circuit **560** is coupled to filtering output terminals **521** and **522**, to detect the filtered signal from filtering circuit **520** for determining whether to enter a protection state. Upon entering a protection state, protection circuit **560** works to limit, restrain, or clamp down on the level of the filtered signal, preventing damaging of components in LED driving module **530**. And rectifying circuit **540** and anti-flickering circuit **550** may be omitted and are thus depicted in a dotted line in FIG. **56**A.

FIG. **56**B is a schematic diagram of the protection circuit according to an embodiment of the present invention. Referring to FIG. **56**B, a protection circuit **660** includes a voltage clamping circuit, a voltage division circuit, capacitors **663** and **670**, resistor **669**, and a diode **672**, for entering a protection state when a current and/or voltage of the LED module is/are or might be excessively high, thus preventing damaging of the LED module. The voltage clamping circuit includes a bidirectional triode thyristor (TRIAC) **661** and a DIAC or symmetrical trigger diode **662**. The voltage division circuit includes bipolar junction transistors (BJT) **667** and **668** and resistors **664**, **665**, **666**, and **671**.

Bidirectional triode thyristor **661** has a first terminal connected to filtering output terminal **521**, a second terminal connected to filtering output terminal **522**, and a control terminal connected to a first terminal of symmetrical trigger diode **662**, which has a second terminal connected to an end of capacitor **663**, which has another end connected to filtering output terminal **522**. Resistor **664** is in parallel to capacitor **663**, and has an end connected to the second terminal of symmetrical trigger diode **662** and another end connected to filtering output terminal **522**. Resistor **665** has an end connected to the second terminal of symmetrical trigger diode **662** and another end connected to the collector terminal of BJT **667**, whose emitter terminal is connected to filtering output terminal **522**. Resistor **666** has an end connected to the second terminal of symmetrical trigger diode **662** and another end connected to the collector terminal of BJT **668** and the base terminal of BJT **667**. The emitter terminal of BJT **668** is connected to filtering output terminal **522**. Resistor **669** has an end connected to the base terminal of BJT **668** and another end connected to an end of capacitor **670**, which has another end connected to filtering output terminal **522**. Resistor **671** has an end connected to the second terminal of symmetrical trigger diode **662** and another end connected to the cathode of diode **672**, whose anode is connected to filtering output terminal **521**.

It's worth noting that according to some embodiments, the resistance of resistor **665** should be smaller than that of resistor **666**.

Next, an exemplary operation of protection circuit **660** in overcurrent protection is described as follows.

The node connecting resistor **669** and capacitor **670** is to receive a current detection signal S**531**, which represents the magnitude of current through the LED module. The other end of resistor **671** is a voltage terminal **521'**. In this embodiment concerning overcurrent protection, voltage terminal **521'** may be coupled to a biasing voltage source, or be connected through diode **672** to filtering output terminal **521**, as shown in FIG. **56**B, to take a filtered signal as a biasing voltage source. If voltage terminal **521'** is coupled to an external biasing voltage source, diode **672** may be omitted, so it is depicted in a dotted line in FIG. **56**B. The combination of resistor **669** and capacitor **670** can work to filter out high frequency components of the current detection signal S**531**, and then input the filtered current detection signal S**531** to the base terminal of BJT **668** for controlling current conduction and cutoff of BJT **668**. The filtering function of resistor **669** and capacitor **670** can prevent misoperation of BJT **668** due to noises. In practical use, resistor **669** and capacitor **670** may be omitted, so they are each depicted in a dotted line in FIG. **56**B. When they are omitted, current detection signal S**531** is input directly to the base terminal of BJT **668**.

When the LED lamp is operating normally and the current of the LED module is within a normal range, BJT **668** is in a cutoff state, and resistor **66** works to pull up the base voltage of BJT **667**, which therefore enters a conducting state. In this state, the electric potential at the second terminal of symmetrical trigger diode **662** is determined based on the voltage at voltage terminal **521'** of the biasing voltage source and voltage division ratios between resistor **671** and parallel-connected resistors **664** and **665**. Since the resistance of resistor **665** is relatively small, voltage share for resistor **665** is smaller and the electric potential at the second terminal of symmetrical trigger diode **662** is therefore pulled down. Then, the electric potential at the control terminal of bidirectional triode thyristor **661** is in turn pulled down by symmetrical trigger diode **662**, causing bidirectional triode thyristor **661** to enter a cutoff state, which cutoff state makes protection circuit **660** not being in a protection state.

When the current of the LED module exceeds an overcurrent value, the level of current detection signal S**531** will increase significantly to cause BJT **668** to enter a conducting state and then pull down the base voltage of BJT **667**, which thereby enters a cutoff state. In this case, the electric potential at the second terminal of symmetrical trigger diode **662** is determined based on the voltage at voltage terminal **521'** of the biasing voltage source and voltage division ratios between resistor **671** and parallel-connected resistors **664** and **666**. Since the resistance of resistor **666** is relatively high, voltage share for resistor **666** is larger and the electric potential at the second terminal of symmetrical trigger diode **662** is therefore higher. Then the electric potential at the

control terminal of bidirectional triode thyristor **661** is in turn pulled up by symmetrical trigger diode **662**, causing bidirectional triode thyristor **661** to enter a conducting state, which conducting state works to restrain or clamp down on the voltage between filtering output terminals **521** and **522** and thus makes protection circuit **660** being in a protection state.

In this embodiment, the voltage at voltage terminal **521'** of the biasing voltage source is determined based on the trigger voltage of bidirectional triode thyristor **661**, and voltage division ratio between resistor **671** and parallel-connected resistors **664** and **665**, or voltage division ratio between resistor **671** and parallel-connected resistors **664** and **666**. Through voltage division between resistor **671** and parallel-connected resistors **664** and **665**, the voltage from voltage terminal **521'** at symmetrical trigger diode **662** will be lower than the trigger voltage of bidirectional triode thyristor **661**. Otherwise, through voltage division between resistor **671** and parallel-connected resistors **664** and **666**, the voltage from voltage terminal **521'** at symmetrical trigger diode **662** will be higher than the trigger voltage of bidirectional triode thyristor **661**. For example, in some embodiments, when the current of the LED module exceeds an overcurrent value, the voltage division circuit is adjusted to the voltage division ratio between resistor **671** and parallel-connected resistors **664** and **666**, causing a higher portion of the voltage at voltage terminal **521'** to result at symmetrical trigger diode **662**, achieving a hysteresis function. Specifically, BJTs **667** and **668** as switches are respectively connected in series to resistors **665** and **666** which determine the voltage division ratios. The voltage division circuit is configured to control turning on which one of BJTs **667** and **668** and leaving the other off for determining the relevant voltage division ratio, according to whether the current of the LED module exceeds an overcurrent value. And the clamping circuit determines whether to restrain or clamp down on the voltage of the LED module according to the applying voltage division ratio.

Next, an exemplary operation of protection circuit **660** in overvoltage protection is described as follows.

The node connecting resistor **669** and capacitor **670** is to receive a current detection signal S**531**, which represents the magnitude of current through the LED module. As described above, protection circuit **660** still works to provide overcurrent protection. The other end of resistor **671** is a voltage terminal **521'**. In this embodiment concerning overvoltage protection, voltage terminal **521'** is coupled to the positive terminal of the LED module to detect the voltage of the LED module. Taking previously described embodiments for example, in embodiments of FIGS. **53**A and **53**B, LED driving module **530** doesn't include driving circuit **1530**, and the voltage terminal **521'** would be coupled to filtering output terminal **521**. Whereas in embodiments of FIGS. **54**A~**54**G, LED driving module **530** includes driving circuit **1530**, and the voltage terminal **521'** would be coupled to driving output terminal **1521**. In this embodiment, voltage division ratios between resistor **671** and parallel-connected resistors **664** and **665**, and voltage division ratios between resistor **671** and parallel-connected resistors **664** and **666** will be adjusted according to the voltage at voltage terminal **521'**, for example, the voltage at driving output terminal **1521** or filtering output terminal **521**. Therefore, normal overcurrent protection can still be provided by protection circuit **660**.

In some embodiments, when the LED lamp is operating normally, assuming overcurrent condition doesn't occur, the electric potential at the second terminal of symmetrical trigger diode **662** is determined based on the voltage at voltage terminal **521'** and voltage division ratios between resistor **671** and parallel-connected resistors **664** and **665**, and is insufficient to trigger bidirectional triode thyristor **661**. Then bidirectional triode thyristor **661** is in a cutoff state, making protection circuit **660** not being in a protection state. On the other hand, when the LED module is operating abnormally with the voltage at the positive terminal of the LED module exceeding an overvoltage value, the electric potential at the second terminal of symmetrical trigger diode **662** is sufficiently high to trigger bidirectional triode thyristor **661** when the voltage at the first terminal of symmetrical trigger diode **662** is larger than the trigger voltage of bidirectional triode thyristor **661**. Then bidirectional triode thyristor **661** enters a conducting state, making protection circuit **660** being in a protection state to restrain or clamp down on the level of the filtered signal.

As described above, protection circuit **660** provides one or two of the functions of overcurrent protection and overvoltage protection.

In some embodiments, protection circuit **660** may further include a zener diode connected to resistor **664** in parallel, which zener diode is used to limit or restrain the voltage across resistor **664**. The breakdown voltage of the zener diode is in some embodiments in the range of about 25~50 volts, and is may preferably be about 36 volts.

Further, a silicon controlled rectifier may be substituted for bidirectional triode thyristor **661**, without negatively affecting the protection functions. Using a silicon controlled rectifier instead of a bidirectional triode thyristor **661** has a lower voltage drop across itself in conduction than that across bidirectional triode thyristor **661** in conduction.

In one embodiment, values of the parameters of protection circuit **660** may be set as follows. Resistance of resistor **669** may be about 10 ohms. Capacitance of capacitor **670** may be about 1 nF. Capacitance of capacitor **633** may be about 10 nF. The (breakover) voltage of symmetrical trigger diode **662** may be in the range of about 26~36 volts. Resistance of resistor **671** may be in the range of about 300 k~600 k ohms, and may preferably be, in some embodiments, about 540 k ohms. Resistance of resistor **666** is in some embodiments in the range of about 100 k~300 k ohms, and may preferably be, in some embodiments, about 220 k ohms. Resistance of resistor **665** is in some embodiments in the range of about 30 k~100 k ohms, and may preferably be, in some embodiments about 40 k ohms. Resistance of resistor **664** is in some embodiments in the range of about 100 k~300 k ohms, and may preferably be, in some embodiments about 220 k ohms.

FIG. **57**A is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to FIG. **54**A, the embodiment of FIG. **57**A includes rectifying circuits **510** and **540**, a filtering circuit **520**, and an LED driving module **530** including a driving circuit **1530** and an LED module **630**, and further includes a mode switching circuit **580**. Mode switching circuit **580** is coupled to at least one of filtering output terminals **521** and **522** and at least one of driving output terminals **1521** and **1522**, for determining whether to perform a first driving mode or a second driving mode, as according to a frequency of the external driving signal. In the first driving mode, a filtered signal from filtering circuit **520** is input into driving circuit **1530**, while in the second driving mode the filtered signal bypasses at least a component of driving circuit **1530**, making driving circuit **1530** stop working in conducting the filtered signal, allowing the filtered signal to (directly) reach and drive LED module **630**.

The bypassed component(s) of driving circuit **1530** may include an inductor or a switch, which when bypassed makes driving circuit **1530** unable to transfer and/or convert power, and then stop working in conducting the filtered signal. If driving circuit **1530** includes a capacitor, the capacitor can still be used to filter out ripples of the filtered signal in order to stabilize the voltage across the LED module. When mode switching circuit **580** determines on performing the first driving mode, allowing the filtered signal to be input to driving circuit **1530**, driving circuit **1530** then transforms the filtered signal into a driving signal for driving LED module **630** to emit light. On the other hand, when mode switching circuit **580** determines on performing the second driving mode, allowing the filtered signal to bypass driving circuit **1530** to reach LED module **630**, filtering circuit **520** becomes in effect a driving circuit for LED module **630**. Then filtering circuit **520** provides the filtered signal as a driving signal for the LED module for driving the LED module to emit light.

It's worth noting that mode switching circuit **580** can determine whether to perform the first driving mode or the second driving mode based on a user's instruction or a detected signal received by the LED lamp through pins **501**, **502**, **503**, and **504**. With the mode switching circuit, the power supply module of the LED lamp can adapt to or perform one of appropriate driving modes corresponding to different application environments or driving systems, thus improving the compatibility of the LED lamp. In some embodiments, rectifying circuit **540** may be omitted, and is thus depicted in a dotted line in FIG. **57**A.

FIG. **57**B is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**B, a mode switching circuit **680** includes a mode switch **681** suitable for use with the driving circuit **1630** in FIG. **54**C. Referring to FIGS. **57**B and **54**C, mode switch **681** has three terminals **683**, **684**, and **685**, wherein terminal **683** is coupled to driving output terminal **1522**, terminal **684** is coupled to filtering output terminal **522**, and terminal **685** is coupled to the inductor **1632** in driving circuit **1630**.

When mode switching circuit **680** determines on performing a first driving mode, mode switch **681** conducts current in a first conductive path through terminals **683** and **685** and a second conductive path through terminals **683** and **684** is in a cutoff state. In this case, driving output terminal **1522** is coupled to inductor **1632**, and therefore driving circuit **1630** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **680** determines on performing a second driving mode, mode switch **681** conducts current in the second conductive path through terminals **683** and **684** and the first conductive path through terminals **683** and **685** is in a cutoff state. In this case, driving output terminal **1522** is coupled to filtering output terminal **522**, and therefore driving circuit **1630** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1632** and switch **1635** in driving circuit **1630**.

FIG. **57**C is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**C, a mode switching circuit **780** includes a mode switch **781** suitable for use with the driving circuit **1630** in FIG. **54**C. Referring to FIGS. **57**C and **54**C, mode switch **781** has three terminals **783**, **784**, and **785**, wherein terminal **783** is coupled to filtering output terminal **522**, terminal **784** is coupled to driving output terminal **1522**, and terminal **785** is coupled to switch **1635** in driving circuit **1630**.

When mode switching circuit **780** determines on performing a first driving mode, mode switch **781** conducts current in a first conductive path through terminals **783** and **785** and a second conductive path through terminals **783** and **784** is in a cutoff state. In this case, filtering output terminal **522** is coupled to switch **1635**, and therefore driving circuit **1630** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **780** determines on performing a second driving mode, mode switch **781** conducts current in the second conductive path through terminals **783** and **784** and the first conductive path through terminals **783** and **785** is in a cutoff state. In this case, driving output terminal **1522** is coupled to filtering output terminal **522**, and therefore driving circuit **1630** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1632** and switch **1635** in driving circuit **1630**.

FIG. **57**D is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**D, a mode switching circuit **880** includes a mode switch **881** suitable for use with the driving circuit **1730** in FIG. **54**D. Referring to FIGS. **57**D and **54**D, mode switch **881** has three terminals **883**, **884**, and **885**, wherein terminal **883** is coupled to filtering output terminal **521**, terminal **884** is coupled to driving output terminal **1521**, and terminal **885** is coupled to inductor **1732** in driving circuit **1730**.

When mode switching circuit **880** determines on performing a first driving mode, mode switch **881** conducts current in a first conductive path through terminals **883** and **885** and a second conductive path through terminals **883** and **884** is in a cutoff state. In this case, filtering output terminal **521** is coupled to inductor **1732**, and therefore driving circuit **1730** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **880** determines on performing a second driving mode, mode switch **881** conducts current in the second conductive path through terminals **883** and **884** and the first conductive path through terminals **883** and **885** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and therefore driving circuit **1730** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1732** and freewheeling diode **1733** in driving circuit **1730**.

FIG. **57**E is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**E, a mode switching circuit **980** includes a mode switch **981** suitable for use with the driving circuit **1730** in FIG. **54**D. Referring to FIGS. **57**E and **54**D, mode switch **981** has three terminals **983**, **984**, and **985**, wherein terminal **983** is coupled to driving output terminal **1521**, terminal **984** is coupled to filtering output

terminal **521**, and terminal **985** is coupled to the cathode of diode **1733** in driving circuit **1730**.

When mode switching circuit **980** determines on performing a first driving mode, mode switch **981** conducts current in a first conductive path through terminals **983** and **985** and a second conductive path through terminals **983** and **984** is in a cutoff state. In this case, filtering output terminal **521** is coupled to the cathode of diode **1733**, and therefore driving circuit **1730** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **980** determines on performing a second driving mode, mode switch **981** conducts current in the second conductive path through terminals **983** and **984** and the first conductive path through terminals **983** and **985** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and therefore driving circuit **1730** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1732** and freewheeling diode **1733** in driving circuit **1730**.

FIG. **57**F is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**F, a mode switching circuit **1680** includes a mode switch **1681** suitable for use with the driving circuit **1830** in FIG. **54**E. Referring to FIGS. **57**F and **54**E, mode switch **1681** has three terminals **1683**, **1684**, and **1685**, wherein terminal **1683** is coupled to filtering output terminal **521**, terminal **1684** is coupled to driving output terminal **1521**, and terminal **1685** is coupled to switch **1835** in driving circuit **1830**.

When mode switching circuit **1680** determines on performing a first driving mode, mode switch **1681** conducts current in a first conductive path through terminals **1683** and **1685** and a second conductive path through terminals **1683** and **1684** is in a cutoff state. In this case, filtering output terminal **521** is coupled to switch **1835**, and therefore driving circuit **1830** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **1680** determines on performing a second driving mode, mode switch **1681** conducts current in the second conductive path through terminals **1683** and **1684** and the first conductive path through terminals **1683** and **1685** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and therefore driving circuit **1830** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1832** and switch **1835** in driving circuit **1830**.

FIG. **57**G is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**G, a mode switching circuit **1780** includes a mode switch **1781** suitable for use with the driving circuit **1830** in FIG. **54**E. Referring to FIGS. **57**G and **54**E, mode switch **1781** has three terminals **1783**, **1784**, and **1785**, wherein terminal **1783** is coupled to filtering output terminal **521**, terminal **1784** is coupled to driving output terminal **1521**, and terminal **1785** is coupled to inductor **1832** in driving circuit **1830**.

When mode switching circuit **1780** determines on performing a first driving mode, mode switch **1781** conducts current in a first conductive path through terminals **1783** and **1785** and a second conductive path through terminals **1783** and **1784** is in a cutoff state. In this case, filtering output terminal **521** is coupled to inductor **1832**, and therefore driving circuit **1830** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **1780** determines on performing a second driving mode, mode switch **1781** conducts current in the second conductive path through terminals **1783** and **1784** and the first conductive path through terminals **1783** and **1785** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and therefore driving circuit **1830** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing inductor **1832** and switch **1835** in driving circuit **1830**.

FIG. **57**H is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**H, a mode switching circuit **1880** includes mode switches **1881** and **1882** suitable for use with the driving circuit **1930** in FIG. **54**F. Referring to FIGS. **57**H and **54**F, mode switch **1881** has three terminals **1883**, **1884**, and **1885**, wherein terminal **1883** is coupled to driving output terminal **1521**, terminal **1884** is coupled to filtering output terminal **521**, and terminal **1885** is coupled to freewheeling diode **1933** in driving circuit **1930**. And mode switch **1882** has three terminals **1886**, **1887**, and **1888**, wherein terminal **1886** is coupled to driving output terminal **1522**, terminal **1887** is coupled to filtering output terminal **522**, and terminal **1888** is coupled to filtering output terminal **521**.

When mode switching circuit **1880** determines on performing a first driving mode, mode switch **1881** conducts current in a first conductive path through terminals **1883** and **1885** and a second conductive path through terminals **1883** and **1884** is in a cutoff state, and mode switch **1882** conducts current in a third conductive path through terminals **1886** and **1888** and a fourth conductive path through terminals **1886** and **1887** is in a cutoff state. In this case, driving output terminal **1521** is coupled to freewheeling diode **1933**, and filtering output terminal **521** is coupled to driving output terminal **1522**. Therefore driving circuit **1930** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **1880** determines on performing a second driving mode, mode switch **1881** conducts current in the second conductive path through terminals **1883** and **1884** and the first conductive path through terminals **1883** and **1885** is in a cutoff state, and mode switch **1882** conducts current in the fourth conductive path through terminals **1886** and **1887** and the third conductive path through terminals **1886** and **1888** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and filtering output terminal **522** is coupled to driving output terminal **1522**. Therefore driving circuit **1930** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving

output terminals **1521** and **1522** for driving the LED module, while bypassing freewheeling diode **1933** and switch **1935** in driving circuit **1930**.

FIG. **57**I is a schematic diagram of the mode switching circuit in an LED lamp according to an embodiment of the present invention. Referring to FIG. **57**I, a mode switching circuit **1980** includes mode switches **1981** and **1982** suitable for use with the driving circuit **1930** in FIG. **54**F. Referring to FIGS. **57**I and **54**F, mode switch **1981** has three terminals **1983**, **1984**, and **1985**, wherein terminal **1983** is coupled to filtering output terminal **522**, terminal **1984** is coupled to driving output terminal **1522**, and terminal **1985** is coupled to switch **1935** in driving circuit **1930**. And mode switch **1982** has three terminals **1986**, **1987**, and **1988**, wherein terminal **1986** is coupled to filtering output terminal **521**, terminal **1987** is coupled to driving output terminal **1521**, and terminal **1988** is coupled to driving output terminal **1522**.

When mode switching circuit **1980** determines on performing a first driving mode, mode switch **1981** conducts current in a first conductive path through terminals **1983** and **1985** and a second conductive path through terminals **1983** and **1984** is in a cutoff state, and mode switch **1982** conducts current in a third conductive path through terminals **1986** and **1988** and a fourth conductive path through terminals **1986** and **1987** is in a cutoff state. In this case, driving output terminal **1522** is coupled to filtering output terminal **521**, and filtering output terminal **522** is coupled to switch **1935**. Therefore driving circuit **1930** is working normally, which working includes receiving a filtered signal from filtering output terminals **521** and **522** and then transforming the filtered signal into a driving signal, output at driving output terminals **1521** and **1522** for driving the LED module.

When mode switching circuit **1980** determines on performing a second driving mode, mode switch **1981** conducts current in the second conductive path through terminals **1983** and **1984** and the first conductive path through terminals **1983** and **1985** is in a cutoff state, and mode switch **1982** conducts current in the fourth conductive path through terminals **1986** and **1987** and the third conductive path through terminals **1986** and **1988** is in a cutoff state. In this case, driving output terminal **1521** is coupled to filtering output terminal **521**, and filtering output terminal **522** is coupled to driving output terminal **1522**. Therefore driving circuit **1930** stops working, and a filtered signal is input through filtering output terminals **521** and **522** to driving output terminals **1521** and **1522** for driving the LED module, while bypassing freewheeling diode **1933** and switch **1935** in driving circuit **1930**.

It's worth noting that the mode switches in the above embodiments may each comprise, for example, a single-pole double-throw switch, or comprise two semiconductor switches (such as metal oxide semiconductor transistors), for switching a conductive path on to conduct current while leaving the other conductive path cutoff. Each of the two conductive paths provides a path for conducting the filtered signal, allowing the current of the filtered signal to flow through one of the two paths, thereby achieving the function of mode switching or selection. For example, with reference to FIGS. **49**A, **49**B, and **49**D in addition, when the lamp driving circuit **505** is not present and the LED tube lamp **500** is directly supplied by the AC power supply **508**, the mode switching circuit may determine on performing a first driving mode in which the driving circuit (such as driving circuit **1530**, **1630**, **1730**, **1830**, or **1930**) transforms the filtered signal into a driving signal of a level meeting a required level to properly drive the LED module to emit light.

On the other hand, when the lamp driving circuit **505** is present, the mode switching circuit may determine on performing a second driving mode in which the filtered signal is (almost) directly used to drive the LED module to emit light; or alternatively the mode switching circuit may determine on performing the first driving mode to drive the LED module to emit light.

FIG. **58**A is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to FIG. **49**E, the embodiment of FIG. **58**A includes rectifying circuits **510** and **540**, a filtering circuit **520**, and an LED driving module **530**, and further includes a ballast-compatible circuit **1510**. The ballast-compatible circuit **1510** may be coupled between pin **501** and/or pin **502** and rectifying circuit **510**. This embodiment is explained assuming the ballast-compatible circuit **1510** to be coupled between pin **501** and rectifying circuit **510**. With reference to FIGS. **49**A, **49**B, and **49**D in addition to FIG. **58**A, lamp driving circuit **505** comprises a ballast configured to provide an AC driving signal to drive the LED lamp in this embodiment.

In an initial stage upon the activation of the driving system of lamp driving circuit **505**, lamp driving circuit **505**'s ability to output relevant signal(s) has not risen to a standard state. However, in the initial stage the power supply module of the LED lamp instantly or rapidly receives or conducts the AC driving signal provided by lamp driving circuit **505**, which initial conduction is likely to fail the starting of the LED lamp by lamp driving circuit **505** as lamp driving circuit **505** is initially loaded by the LED lamp in this stage. For example, internal components of lamp driving circuit **505** may need to retrieve power from a transformed output in lamp driving circuit **505**, in order to maintain their operation upon the activation. In this case, the activation of lamp driving circuit **505** may end up failing as its output voltage could not normally rise to a required level in this initial stage; or the quality factor (Q) of a resonant circuit in lamp driving circuit **505** may vary as a result of the initial loading from the LED lamp, so as to cause the failure of the activation.

In this embodiment, in the initial stage upon activation, ballast-compatible circuit **1510** will be in an open-circuit state, preventing the energy of the AC driving signal from reaching the LED module. After a defined delay upon the AC driving signal as an external driving signal being input to the LED tube lamp, ballast-compatible circuit **1510** switches from a cutoff state during the delay to a conducting state, allowing the energy of the AC driving signal to start to reach the LED module. By means of the delayed conduction of ballast-compatible circuit **1510**, operation of the LED lamp simulates the lamp-starting characteristics of a fluorescent lamp, that is, internal gases of the fluorescent lamp will normally discharge for light emission after a delay upon activation of a driving power supply. Therefore, ballast-compatible circuit **1510** further improves the compatibility of the LED lamp with lamp driving circuits **505** such as an electronic ballast.

In this embodiment, rectifying circuit **540** may be omitted and is therefore depicted by a dotted line in FIG. **58**A.

FIG. **58**B is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to FIG. **58**A, ballast-compatible circuit **1510** in the embodiment of FIG. **58**B is coupled between pin **503** and/or pin **504** and rectifying circuit **540**. As explained regarding ballast-compatible circuit **1510** in FIG. **58**A, ballast-compatible circuit **1510** in FIG. **58**B performs the function of delaying the starting of the LED lamp, or causing

the input of the AC driving signal to be delayed for a predefined time, in order to prevent the failure of starting by lamp driving circuits **505** such as an electronic ballast.

Apart from coupling ballast-compatible circuit **1510** between terminal pin(s) and rectifying circuit in the above embodiments, ballast-compatible circuit **1510** may alternatively be included within a rectifying circuit with a different structure. FIG. **58**C illustrates an arrangement with a ballast-compatible circuit in an LED lamp according to a preferred embodiment of the present invention. Referring to FIG. **58**C, the rectifying circuit assumes the circuit structure of rectifying circuit **810** in FIG. **50**C. Rectifying circuit **810** includes rectifying unit **815** and terminal adapter circuit **541**. Rectifying unit **815** is coupled to pins **501** and **502**, terminal adapter circuit **541** is coupled to filtering output terminals **511** and **512**, and the ballast-compatible circuit **1510** in FIG. **58**C is coupled between rectifying unit **815** and terminal adapter circuit **541**. In this case, in the initial stage upon activation of the ballast, an AC driving signal as an external driving signal is input to the LED tube lamp, where the AC driving signal can only reach rectifying unit **815**, but cannot reach other circuits such as terminal adapter circuit **541**, other internal filter circuitry, and the LED driving module. Moreover, parasitic capacitors associated with rectifying diodes **811** and **812** within rectifying unit **815** are quite small in capacitance and thus can be ignored. Accordingly, lamp driving circuit **505** in the initial stage isn't loaded with or effectively connected to the equivalent capacitor or inductor of the power supply module of the LED lamp, and the quality factor (Q) of lamp driving circuit **505** is therefore not adversely affected in this stage, resulting in a successful starting of the LED lamp by lamp driving circuit **505**.

It's worth noting that under the condition that terminal adapter circuit **541** doesn't include components such as capacitors or inductors, interchanging rectifying unit **815** and terminal adapter circuit **541** in position, meaning rectifying unit **815** is connected to filtering output terminals **511** and **512** and terminal adapter circuit **541** is connected to pins **501** and **502**, doesn't affect or alter the function of ballast-compatible circuit **1510**.

Further, as explained in FIGS. **50**A~**50**D, when a rectifying circuit is connected to pins **503** and **504** instead of pins **501** and **502**, this rectifying circuit may constitute the rectifying circuit **540**. That is, the circuit arrangement with a ballast-compatible circuit **1510** in FIG. **58**C may be alternatively included in rectifying circuit **540** instead of rectifying circuit **810**, without affecting the function of ballast-compatible circuit **1510**.

In some embodiments, as described above terminal adapter circuit **541** doesn't include components such as capacitors or inductors. Or when rectifying circuit **610** in FIG. **50**A constitutes the rectifying circuit **510** or **540**, parasitic capacitances in the rectifying circuit **510** or **540** are quite small and thus can be ignored. These conditions contribute to not affecting the quality factor of lamp driving circuit **505**.

FIG. **58**D is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to the embodiment of FIG. **58**A, ballast-compatible circuit **1510** in the embodiment of FIG. **58**D is coupled between rectifying circuit **540** and filtering circuit **520**. Since rectifying circuit **540** also doesn't include components such as capacitors or inductors, the function of ballast-compatible circuit **1510** in the embodiment of FIG. **58**D will not be affected.

FIG. **58**E is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to the embodiment of FIG. **58**A, ballast-compatible circuit **1510** in the embodiment of FIG. **58**E is coupled between rectifying circuit **510** and filtering circuit **520**. Similarly, since rectifying circuit **510** doesn't include components such as capacitors or inductors, the function of ballast-compatible circuit **1510** in the embodiment of FIG. **58**E will not be affected.

FIG. **58**F is a schematic diagram of the ballast-compatible circuit according to an embodiment of the present invention. Referring to FIG. **58**F, a ballast-compatible circuit **1610** has an initial state in which an equivalent open-circuit is obtained at ballast-compatible circuit input and output terminals **1611** and **1621**. Upon receiving an input signal at ballast-compatible circuit input terminal **1611**, a delay will pass until a current conduction occurs through and between ballast-compatible circuit input and output terminals **1611** and **1621**, transmitting the input signal to ballast-compatible circuit output terminal **1621**.

Ballast-compatible circuit **1610** includes a diode **1612**, resistors **1613**, **1615**, **1618**, **1620**, and **1622**, a bidirectional triode thyristor (TRIAC) **1614**, a DIAC or symmetrical trigger diode **1617**, a capacitor **1619**, and ballast-compatible circuit input and output terminals **1611** and **1621**. It's noted that the resistance of resistor **1613** should be quite large so that when bidirectional triode thyristor **1614** is cutoff in an open-circuit state, an equivalent open-circuit is obtained at ballast-compatible circuit input and output terminals **1611** and **1621**.

Bidirectional triode thyristor **1614** is coupled between ballast-compatible circuit input and output terminals **1611** and **1621**, and resistor **1613** is also coupled between ballast-compatible circuit input and output terminals **1611** and **1621** and in parallel to bidirectional triode thyristor **1614**. Diode **1612**, resistors **1620** and **1622**, and capacitor **1619** are series-connected in sequence between ballast-compatible circuit input and output terminals **1611** and **1621**, and are connected in parallel to bidirectional triode thyristor **1614**. Diode **1612** has an anode connected to bidirectional triode thyristor **1614**, and has a cathode connected to an end of resistor **1620**. Bidirectional triode thyristor **1614** has a control terminal connected to a terminal of symmetrical trigger diode **1617**, which has another terminal connected to an end of resistor **1618**, which has another end connected to a node connecting capacitor **1619** and resistor **1622**. Resistor **1615** is connected between the control terminal of bidirectional triode thyristor **1614** and a node connecting resistor **1613** and capacitor **1619**.

When an AC driving signal (such as a high-frequency high-voltage AC signal output by an electronic ballast) is initially input to ballast-compatible circuit input terminal **1611**, bidirectional triode thyristor **1614** will be in an open-circuit state, not allowing the AC driving signal to pass through and the LED lamp is therefore also in an open-circuit state. In this state, the AC driving signal is charging capacitor **1619** through diode **1612** and resistors **1620** and **1622**, gradually increasing the voltage of capacitor **1619**. Upon continually charging for a period of time, the voltage of capacitor **1619** increases to be above the trigger voltage value of symmetrical trigger diode **1617** so that symmetrical trigger diode **1617** is turned on in a conducting state. Then the conducting symmetrical trigger diode **1617** will in turn trigger bidirectional triode thyristor **1614** on in a conducting state. In this situation, the conducting bidirectional triode thyristor **1614** electrically connects ballast-compatible circuit input and output terminals **1611** and **1621**, allowing the AC driving signal to flow through ballast-compatible circuit input and output terminals **1611** and **1621**, thus starting the

operation of the power supply module of the LED lamp. In this case the energy stored by capacitor **1619** will maintain the conducting state of bidirectional triode thyristor **1614**, to prevent the AC variation of the AC driving signal from causing bidirectional triode thyristor **1614** and therefore ballast-compatible circuit **1610** to be cutoff again, or to prevent the problem of bidirectional triode thyristor **1614** alternating or switching between its conducting and cutoff states.

In general, in hundreds of milliseconds upon activation of a lamp driving circuit **505** such as an electronic ballast, the output voltage of the ballast has risen above a certain voltage value as the output voltage hasn't been adversely affected by the sudden initial loading from the LED lamp. A detection mechanism to detect whether lighting of a fluorescent lamp is achieved may be disposed in lamp driving circuits **505** such as an electronic ballast. In this detection mechanism, if a fluorescent lamp fails to be lit up for a defined period of time, an abnormal state of the fluorescent lamp is detected, causing the fluorescent lamp to enter a protection state. In view of these facts, in certain embodiments, the delay provided by ballast-compatible circuit **1610** until conduction of ballast-compatible circuit **1610** and then the LED lamp should be and may preferably be in the range of about 0.1~3 seconds.

It's worth noting that an additional capacitor **1623** may be coupled in parallel to resistor **1622**. Capacitor **1623** works to reflect or support instantaneous change in the voltage between ballast-compatible circuit input and output terminals **1611** and **1621**, and will not affect the function of delayed conduction performed by ballast-compatible circuit **1610**.

FIG. **58**G is a block diagram of a power supply module in an LED lamp according to an embodiment of the present invention. Compared to the embodiment of FIG. **49**D, lamp driving circuit **505** in the embodiment of FIG. **58**G drives a plurality of LED tube lamps **500** connected in series, wherein a ballast-compatible circuit **1610** is disposed in each of the LED tube lamps **500**. For the convenience of illustration, two series-connected LED tube lamps **500** are assumed for example and explained as follows.

Because the two ballast-compatible circuits **1610** respectively of the two LED tube lamps **500** can actually have different delays until conduction of the LED tube lamps **500**, due to various factors such as errors occurring in production processes of some components, the actual timing of conduction of each of the ballast-compatible circuits **1610** is different. Upon activation of a lamp driving circuit **505**, the voltage of the AC driving signal provided by lamp driving circuit **505** will be shared out by the two LED tube lamps **500** roughly equally. Subsequently when only one of the two LED tube lamps **500** first enters a conducting state, the voltage of the AC driving signal then will be borne mostly or entirely by the other LED tube lamp **500**. This situation will cause the voltage across the ballast-compatible circuits **1610** in the other LED tube lamp **500** that's not conducting to suddenly increase or be doubled, meaning the voltage between ballast-compatible circuit input and output terminals **1611** and **1621** might even be suddenly doubled. In view of this, if capacitor **1623** is included, the voltage division effect between capacitors **1619** and **1623** will instantaneously increase the voltage of capacitor **1619**, making symmetrical trigger diode **1617** triggering bidirectional triode thyristor **1614** into a conducting state, thus causing the two ballast-compatible circuits **1610** respectively of the two LED tube lamps **500** to become conducting almost at the same time. Therefore, by introducing capacitor **1623**, the situation, where one of the two ballast-compatible circuits **1610** respectively of the two series-connected LED tube lamps **500** that is first conducting has its bidirectional triode thyristor **1614** then suddenly cutoff as having insufficient current passing through due to the discrepancy between the delays provided by the two ballast-compatible circuits **1610** until their respective conductions, can be avoided. Therefore, using each ballast-compatible circuit **1610** with capacitor **1623** further improves the compatibility of the series-connected LED tube lamps with each of lamp driving circuits **505** such as an electronic ballast.

In practical use, a suggested range of the capacitance of capacitor **1623** is about 10 pF to about 1 nF, which may preferably be in the range of about 10 pF to about 100 pF, and may be even more desirable at about 47 pF.

It's worth noting that diode **1612** is used or configured to rectify the signal for charging capacitor **1619**. Therefore, with reference to FIGS. **58**C, **58**D, and **58**E, in the case when ballast-compatible circuit **1610** is arranged following a rectifying unit or circuit, diode **1612** may be omitted. Thus diode **1612** is depicted in a dotted line in FIG. **58**F.

FIG. **58**H is a schematic diagram of the ballast-compatible circuit according to another embodiment of the present invention. Referring to FIG. **58**H, a ballast-compatible circuit **1710** has an initial state in which an equivalent open-circuit is obtained at ballast-compatible circuit input and output terminals **1711** and **1721**. Upon receiving an input signal at ballast-compatible circuit input terminal **1711**, ballast-compatible circuit **1710** will be in a cutoff state when the level of the input external driving signal is below a defined value corresponding to a conduction delay of ballast-compatible circuit **1710**; and ballast-compatible circuit **1710** will enter a conducting state upon the level of the input external driving signal reaching the defined value, thus transmitting the input signal to ballast-compatible circuit output terminal **1721**.

Ballast-compatible circuit **1710** includes a bidirectional triode thyristor (TRIAC) **1712**, a DIAC or symmetrical trigger diode **1713**, resistors **1714**, **1716**, and **1717**, and a capacitor **1715**. Bidirectional triode thyristor **1712** has a first terminal connected to ballast-compatible circuit input terminal **1711**; a control terminal connected to a terminal of symmetrical trigger diode **1713** and an end of resistor **1714**; and a second terminal connected to another end of resistor **1714**. Capacitor **1715** has an end connected to another terminal of symmetrical trigger diode **1713**, and has another end connected to the second terminal of bidirectional triode thyristor **1712**. Resistor **1717** is in parallel connection with capacitor **1715**, and is therefore also connected to said another terminal of symmetrical trigger diode **1713** and the second terminal of bidirectional triode thyristor **1712**. And resistor **1716** has an end connected to the node connecting capacitor **1715** and symmetrical trigger diode **1713**, and has another end connected to ballast-compatible circuit output terminal **1721**.

When an AC driving signal (such as a high-frequency high-voltage AC signal output by an electronic ballast) is initially input to ballast-compatible circuit input terminal **1711**, bidirectional triode thyristor **1712** will be in an open-circuit state, not allowing the AC driving signal to pass through and the LED lamp is therefore also in an open-circuit state. The input of the AC driving signal causes a potential difference between ballast-compatible circuit input terminal **1711** and ballast-compatible circuit output terminal **1721**. When the AC driving signal increases with time to eventually reach a sufficient amplitude (which is a defined level after the delay) after a period of time, the signal level

at ballast-compatible circuit output terminal **1721** has a reflected voltage at the control terminal of bidirectional triode thyristor **1712** after passing through resistor **1716**, parallel-connected capacitor **1715** and resistor **1717**, and resistor **1714**, wherein the reflected voltage then triggers bidirectional triode thyristor **1712** into a conducting state. This conducting state makes ballast-compatible circuit **1710** entering a conducting state which causes the LED lamp to operate normally. Upon bidirectional triode thyristor **1712** conducting, a current flows through resistor **1716** and then charges capacitor **1715** to store a specific voltage on capacitor **1715**. In this case, the energy stored by capacitor **1715** will maintain the conducting state of bidirectional triode thyristor **1712**, to prevent the AC variation of the AC driving signal from causing bidirectional triode thyristor **1712** and therefore ballast-compatible circuit **1710** to be cutoff again, or to prevent the situation of bidirectional triode thyristor **1712** alternating or switching between its conducting and cutoff states.

FIG. **58**I illustrates the ballast-compatible circuit according to an embodiment of the present invention. Referring to FIG. **58**I, a ballast-compatible circuit **1810** includes a housing **1812**, a metallic electrode **1813**, a bimetallic strip **1814**, and a heating filament **1816**. Metallic electrode **1813** and heating filament **1816** protrude from the housing **1812**, so that they each have a portion inside the housing **1812** and a portion outside of the housing **1812**. Metallic electrode **1813**'s outside portion has a ballast-compatible circuit input terminal **1811**, and heating filament **1816**'s outside portion has a ballast-compatible circuit output terminal **1821**. Housing **1812** is hermetic or tightly sealed and contains inertial gas **1815** such as helium gas. Bimetallic strip **1814** is inside housing **1812** and is physically and electrically connected to the portion of heating filament **1816** that is inside the housing **1812**. And there is a spacing between bimetallic strip **1814** and metallic electrode **1813**, so that ballast-compatible circuit input terminal **1811** and ballast-compatible circuit output terminal **1821** are not electrically connected in the initial state of ballast-compatible circuit **1810**. Bimetallic strip **1814** may include two metallic strips with different temperature coefficients, wherein the metallic strip closer to metallic electrode **1813** has a smaller temperature coefficient, and the metallic strip more away from metallic electrode **1813** has a larger temperature coefficient.

When an AC driving signal (such as a high-frequency high-voltage AC signal output by an electronic ballast) is initially input at ballast-compatible circuit input terminal **1811** and ballast-compatible circuit output terminal **1821**, a potential difference between metallic electrode **1813** and heating filament **1816** is formed.

When the potential difference increases enough to cause electric arc or arc discharge through inertial gas **1815**, meaning when the AC driving signal increases with time to eventually reach the defined level after a delay, then inertial gas **1815** is then heated to cause bimetallic strip **1814** to swell toward metallic electrode **1813** (as in the direction of the broken-line arrow in FIG. **58**I), with this swelling eventually causing bimetallic strip **1814** to bear against metallic electrode **1813**, forming the physical and electrical connections between them. In this situation, there is electrical conduction between ballast-compatible circuit input terminal **1811** and ballast-compatible circuit output terminal **1821**. Then the AC driving signal flows through and thus heats heating filament **1816**. In this heating process, heating filament **1816** allows a current to flow through when electrical conduction exists between metallic electrode **1813** and bimetallic strip **1814**, causing the temperature of bimetallic strip **1814** to be above a defined conduction temperature. As a result, since the respective temperature of the two metallic strips of bimetallic strip **1814** with different temperature coefficients are maintained above the defined conduction temperature, bimetallic strip **1814** will bend against or toward metallic electrode **1813**, thus maintaining or supporting the physical joining or connection between bimetallic strip **1814** and metallic electrode **1813**.

Therefore, upon receiving an input signal at ballast-compatible circuit input and output terminals **1811** and **1821**, a delay will pass until an electrical/current conduction occurs through and between ballast-compatible circuit input and output terminals **1811** and **1821**.

Therefore, an exemplary ballast-compatible circuit such as described herein may be coupled between any pin and any rectifying circuit described above in the invention, wherein the ballast-compatible circuit will be in a cutoff state in a defined delay upon an external driving signal being input to the LED tube lamp, and will enter a conducting state after the delay. Otherwise, the ballast-compatible circuit will be in a cutoff state when the level of the input external driving signal is below a defined value corresponding to a conduction delay of the ballast-compatible circuit; and ballast-compatible circuit will enter a conducting state upon the level of the input external driving signal reaching the defined value. Accordingly, the compatibility of the LED tube lamp described herein with lamp driving circuits **505** such as an electronic ballast is further improved by using such a ballast-compatible circuit.

FIG. **59**A is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **49**E, the present embodiment comprises the rectifying circuits **510** and **540**, the filtering circuit **520**, and the LED driving module **530**, and further comprises two ballast-compatible circuits **1540**. The two ballast-compatible circuits **1540** are coupled respectively between the pin **503** and the rectifying output terminal **511** and between the pin **504** and the rectifying output terminal **511**. Referring to FIG. **49**A, FIG. **49**B and FIG. **49**D, the lamp driving circuit **505** is an electronic ballast for supplying an AC driving signal to drive the LED lamp of the present invention.

Two ballast-compatible circuits **1540** are initially in conducting states, and then enter into cutoff states in a delay. Therefore, in an initial stage upon activation of the lamp driving circuit **505**, the AC driving signal is transmitted through the pin **503**, the corresponding ballast-compatible circuit **1540**, the rectifying output terminal **511** and the rectifying circuit **510**, or through the pin **504**, the corresponding ballast-compatible circuit **1540**, the rectifying output terminal **511** and the rectifying circuit **510** of the LED lamp, and the filtering circuit **520** and LED driving module **530** of the LED lamp are bypassed. Thereby, the LED lamp presents almost no load and does not affect the quality factor of the lamp driving circuit **505** at the beginning, and so the lamp driving circuit can be activated successfully. The two ballast-compatible circuits **1540** are cut off after a time period while the lamp driving circuit **505** has been activated successfully. After that, the lamp driving circuit **505** has a sufficient drive capability for driving the LED lamp to emit light.

FIG. **59**B is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **59**A, the two ballast-compatible circuits **1540** are changed to be coupled respectively between the pin **503** and the rectifying output terminal **512** and between the pin **504** and the

rectifying output terminal **512**. Similarly, two ballast-compatible circuits **1540** are initially in conducting states, and then changed to cutoff states after an objective delay. Thereby, the lamp driving circuit **505** drives the LED lamp to emit light after the lamp driving circuit **505** has activated.

It is worth noting that the arrangement of the two ballast-compatible circuits **1540** may be changed to be coupled between the pin **501** and the rectifying terminal **511** and between the pin **501** and the rectifying terminal **511**, or between the pin **501** and the rectifying terminal **512** and between the pin **501** and the rectifying terminal **512**, for having the lamp driving circuit **505** drive the LED lamp to emit light after being activated.

FIG. **59**C is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIGS. **59**A and **59**B, the rectifying circuit **810** shown in FIG. **50**C replaces the rectifying circuit **540**, and the rectifying unit **815** of the rectifying circuit **810** is coupled to the pins **503** and **504** and the terminal adapter circuit **541** thereof is coupled to the rectifying output terminals **511** and **512**. The arrangement of the two ballast-compatible circuits **1540** is also changed to be coupled respectively between the pin **501** and the half-wave node **819** and between the pin **502** and the half-wave node **819**.

In an initial stage upon activation of the lamp driving circuit **505**, two ballast-compatible circuits **1540** are initially in conducting states. At this moment, the AC driving signal is transmitted through the pin **501**, the corresponding ballast-compatible circuit **1540**, the half-wave node **819** and the rectifying unit **815** or the pin **502**, the corresponding ballast-compatible circuit **1540**, the half-wave node **819** and the rectifying unit **815** of the LED lamp, and the terminal adapter circuit **541**, the filtering circuit **520** and LED driving module **530** of the LED lamp are bypassed. Thereby, the LED lamp presents almost no load and does not affect the quality factor of the lamp driving circuit **505** at the beginning, and so the lamp driving circuit can be activated successfully. The two ballast-compatible circuits **1540** are cut off after a time period while the lamp driving circuit **505** has been activated successfully. After that, the lamp driving circuit **505** has a sufficient drive capability for driving the LED lamp to emit light.

It is worth noting that the rectifying circuit **810** shown in FIG. **50**C may replace the rectifying circuit **510** of the present embodiment shown in FIG. **59**C instead of the rectifying circuit **540**. Wherein, the rectifying unit **815** of the rectifying circuit **810** is coupled to the pins **501** and **502** and the terminal adapter circuit **541** thereof is coupled to the rectifying output terminals **511** and **512**. The arrangement of the two ballast-compatible circuits **1540** is also changed to be coupled respectively between the pin **503** and the half-wave node **819** and between the pin **504** and the half-wave node **819**.

FIG. **59**D is a schematic diagram of a ballast-compatible circuit according to an embodiment of the present invention, which is applicable to the embodiments shown in FIGS. **59**A and **59**B and the described modification thereof.

A ballast-compatible circuit **1640** comprises resistors **1643**, **1645**, **1648** and **1650**, capacitors **1644** and **1649**, diodes **1647** and **1652**, bipolar junction transistors (BJT) **1646** and **1651**, a ballast-compatible circuit terminal **1641** and a ballast-compatible circuit terminal **1642**. One end of the resistor **1645** is coupled to the ballast-compatible circuit terminal **1641**, and the other end is coupled to an emitter of the BJT **1646**. A collector of the BJT **1646** is coupled to a positive end of the diode **1647**, and a negative end thereof is coupled to the ballast-compatible circuit terminal **1642**. The resistor **1643** and the capacitor **1644** are connected in series with each other and coupled between the emitter and the collector of the BJT **1646**, and the connection node of the resistor **1643** and the capacitor **1644** is coupled to a base of the BJT **1646**. One end of the resistor **1650** is coupled to the ballast-compatible circuit terminal **1642**, and the other end is coupled to an emitter of the BJT **1651**. A collector of the BJT **1651** is coupled to a positive end of the diode **1652**, and a negative end thereof is coupled to the ballast-compatible circuit terminal **1641**. The resistor **1648** and the capacitor **1649** are connected in series with each other and coupled between the emitter and the collector of the BJT **1651**, and the connection node of the resistor **1648** and the capacitor **1649** is coupled to a base of the BJT **1651**.

In an initial stage upon the lamp driving circuit **505**, e.g. electronic ballast, being activated, voltages across the capacitors **1644** and **1649** are about zero. At this time, the BJTs **1646** and **1651** are in conducting state and the bases thereof allow currents to flow through. Therefore, in an initial stage upon activation of the lamp driving circuit **505**, the ballast-compatible circuits **1640** are in conducting state. The AC driving signal charges the capacitor **1644** through the resistor **1643** and the diode **1647**, and charges the capacitor **1649** through the resistor **1648** and the diode **1652**. After a time period, the voltages across the capacitors **1644** and **1649** reach certain voltages so as to reduce the voltages of the resistors **1643** and **1648**, thereby cutting off the BJTs **1646** and **1651**, i.e., the states of the BJTs **1646** and **1651** are cutoff states. At this time, the state of the ballast-compatible circuit **1640** is changed to the cutoff state. Thereby, the internal capacitor(s) and inductor(s) do not affect in Q-factor of the lamp driving circuit **505** at the beginning for ensuring the lamp driving circuit activating. Hence, the ballast-compatible circuit **1640** improves the compatibility of LED lamp with the electronic ballast.

In summary, the two ballast-compatible circuits of the present invention are respectively coupled between a connection node of the rectifying circuit and the filtering circuit (i.e., the rectifying output terminal **511** or **512**) and the pin **501** and between the connection node and the pin **502**, or coupled between the connection node and the pin **503** and the connection node and the pin **504**. The two ballast-compatible circuits conduct for an objective delay upon the external driving signal being input into the LED tube lamp, and then are cut off for enhancing the compatibility of the LED lamp with the electronic ballast.

FIG. **60**A is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **49**E, the present embodiment comprises the rectifying circuits **510** and **540**, the filtering circuit **520**, and the LED driving module **530**, and further comprises two filament-simulating circuits **1560**. The filament-simulating circuits **1560** are respectively coupled between the pins **501** and **502** and coupled between the pins **503** and **504**, for improving a compatibility with a lamp driving circuit having filament detection function, e.g.: program-start ballast.

In an initial stage upon the lamp driving circuit having filament detection function being activated, the lamp driving circuit will determine whether the filaments of the lamp operate normally or are in an abnormal condition of short-circuit or open-circuit. When determining the abnormal condition of the filaments, the lamp driving circuit stops operating and enters a protection state. In order to avoid that the lamp driving circuit erroneously determines the LED tube lamp to be abnormal due to the LED tube lamp having

no filament, the two filament-simulating circuits **1560** simulate the operation of actual filaments of a fluorescent tube to have the lamp driving circuit enter into a normal state to start the LED lamp normally.

FIG. **60**B is a schematic diagram of a filament-simulating circuit according to an embodiment of the present invention. The filament-simulating circuit comprises a capacitor **1663** and a resistor **1665** connected in parallel, and two ends of the capacitor **1663** and two ends of the resistor **1665** are re respectively coupled to filament simulating terminals **1661** and **1662**. Referring to FIG. **60**A, the filament simulating terminals **1661** and **1662** of the two filament simulating **1660** are respectively coupled to the pins **501** and **502** and the pins **503** and **504**. During the filament detection process, the lamp driving circuit outputs a detection signal to detect the state of the filaments. The detection signal passes the capacitor **1663** and the resistor **1665** and so the lamp driving circuit determines that the filaments of the LED lamp are normal.

In addition, a capacitance value of the capacitor **1663** is low and so a capacitive reactance (equivalent impedance) of the capacitor **1663** is far lower than an impedance of the resistor **1665** due to the lamp driving circuit outputting a high-frequency alternative current (AC) signal to drive LED lamp. Therefore, the filament-simulating circuit **1660** consumes fairly low power when the LED lamp operates normally, and so it almost does not affect the luminous efficiency of the LED lamp.

FIG. **60**C is a schematic block diagram including a filament-simulating circuit according to an embodiment of the present invention. In the present embodiment, the filament-simulating circuit **1660** replaces the terminal adapter circuit **541** of the rectifying circuit **810** shown in FIG. **50**C, which is adopted as the rectifying circuit **510** or/and **540** in the LED lamp. For example, the filament-simulating circuit **1660** of the present embodiment has both of filament simulating and terminal adapting functions. Referring to FIG. **60**A, the filament simulating terminals **1661** and **1662** of the filament-simulating circuit **1660** are respectively coupled to the pins **501** and **502** or/and pins **503** and **504**. The half-wave node **819** of rectifying unit **815** in the rectifying circuit **810** is coupled to the filament simulating terminal **1662**.

FIG. **60**D is a schematic block diagram including a filament-simulating circuit according to another embodiment of the present invention. Compared to that shown in FIG. **60**C, the half-wave node is changed to be coupled to the filament simulating terminal **1661**, and the filament-simulating circuit **1660** in the present embodiment still has both of filament simulating and terminal adapting functions.

FIG. **60**E is a schematic diagram of a filament-simulating circuit according to another embodiment of the present invention. A filament-simulating circuit **1760** comprises capacitors **1763** and **1764**, and the resistors **1765** and **1766**. The capacitors **1763** and **1764** are connected in series and coupled between the filament simulating terminals **1661** and **1662**. The resistors **1765** and **1766** are connected in series and coupled between the filament simulating terminals **1661** and **1662**. Furthermore, the connection node of capacitors **1763** and **1764** is coupled to that of the resistors **1765** and **1766**. Referring to FIG. **60**A, the filament simulating terminals **1661** and **1662** of the filament-simulating circuit **1760** are respectively coupled to the pins **501** and **502** and the pins **503** and **504**. When the lamp driving circuit outputs the detection signal for detecting the state of the filament, the detection signal passes the capacitors **1763** and **1764** and the resistors **1765** and **1766** so that the lamp driving circuit determines that the filaments of the LED lamp are normal.

It is worth noting that in some embodiments, capacitance values of the capacitors **1763** and **1764** are low and so a capacitive reactance of the serially connected capacitors **1763** and **1764** is far lower than an impedance of the serially connected resistors **1765** and **1766** due to the lamp driving circuit outputting the high-frequency AC signal to drive LED lamp. Therefore, the filament-simulating circuit **1760** consumes fairly low power when the LED lamp operates normally, and so it almost does not affect the luminous efficiency of the LED lamp. Moreover, any one of the capacitor **1763** and the resistor **1765** is short circuited or is an open circuit, or any one of the capacitor **1764** and the resistor **1766** is short circuited or is an open circuit, the detection signal still passes through the filament-simulating circuit **1760** between the filament simulating terminals **1661** and **1662**. Therefore, the filament-simulating circuit **1760** still operates normally when any one of the capacitor **1763** and the resistor **1765** is short circuited or is an open circuit or any one of the capacitor **1764** and the resistor **1766** is short circuited or is an open circuit, and so it has quite high fault tolerance.

FIG. **60**F is a schematic block diagram including a filament-simulating circuit according to an embodiment of the present invention. In the present embodiment, the filament-simulating circuit **1860** replaces the terminal adapter circuit **541** of the rectifying circuit **810** shown in FIG. **50**C, which is adopted as the rectifying circuit **510** or/and **540** in the LED lamp. For example, the filament-simulating circuit **1860** of the present embodiment has both of filament simulating and terminal adapting functions. An impedance of the filament-simulating circuit **1860** has a negative temperature coefficient (NTC), i.e., the impedance at a higher temperature is lower than that at a lower temperature. In the present embodiment, the filament-simulating circuit **1860** comprises two NTC resistors **1863** and **1864** connected in series and coupled to the filament simulating terminals **1661** and **1662**. Referring to FIG. **60**A, the filament simulating terminals **1661** and **1662** are respectively coupled to the pins **501** and **502** or/and the pins **503** and **504**. The half-wave node **819** of the rectifying unit **815** in the rectifying circuit **810** is coupled to a connection node of the NTC resistors **1863** and **1864**.

When the lamp driving circuit outputs the detection signal for detecting the state of the filament, the detection signal passes the NTC resistors **1863** and **1864** so that the lamp driving circuit determines that the filaments of the LED lamp are normal. The impedance of the serially connected NTC resistors **1863** and**1864** is gradually decreased with the gradually increasing of temperature due to the detection signal or a preheat process. When the lamp driving circuit enters into the normal state to start the LED lamp normally, the impedance of the serially connected NTC resistors **1863** and **1864** is decreased to a relative low value and so the power consumption of the filament simulation circuit **1860** is lower.

An exemplary impedance of the filament-simulating circuit **1860** can be 10 ohms or more at room temperature (25 degrees Celsius) and may be decreased to a range of about 2-10 ohms when the lamp driving circuit enters into the normal state. It may be preferred that the impedance of the filament-simulating circuit **1860** is decreased to a range of about 3-6 ohms when the lamp driving circuit enters into the normal state.

FIG. **61**A is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **49**E, the present embodiment comprises the rectifying circuits **510** and **540**, the filtering circuit **520**, and the LED driving

module **530**, and further comprises an over voltage protection (OVP) circuit **1570**. The OVP circuit **1570** is coupled to the filtering output terminals **521** and **522** for detecting the filtered signal. The OVP circuit **1570** clamps the level of the filtered signal when determining the level thereof higher than a defined OVP value. Hence, the OVP circuit **1570** protects the LED driving module **530** from damage due to an OVP condition. The rectifying circuit **540** may be omitted and is therefore depicted by a dotted line.

FIG. **61**B is a schematic diagram of an overvoltage protection (OVP) circuit according to an embodiment of the present invention. The OVP circuit **1670** comprises a voltage clamping diode **1671**, such as zener diode, coupled to the filtering output terminals **521** and **522**. The voltage clamping diode **1671** is conducted to clamp a voltage difference at a breakdown voltage when the voltage difference of the filtering output terminals **521** and **522** (i.e., the level of the filtered signal) reaches the breakdown voltage. The breakdown voltage may be preferred in a range of about 40 V to about 100 V, and more preferred in a range of about 55 V to about 75V.

FIG. **62**A is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **60**A, the present embodiment comprises the rectifying circuits **510** and **540**, the filtering circuit **520**, the LED driving module **530** and the two filament-simulating circuits **1560**, and further comprises a ballast detection circuit **1590**. The ballast detection circuit **1590** may be coupled to any one of the pins **501**, **502**, **503** and **504** and a corresponding rectifying circuit of the rectifying circuits **510** and **540**. In the present embodiment, the ballast detection circuit **1590** is coupled between the pin **501** and the rectifying circuit **510**.

The ballast detection circuit **1590** detects the AC driving signal or a signal input through the pins **501**, **502**, **503** and **504**, and determines whether the input signal is provided by an electric ballast based on the detected result.

FIG. **62**B is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. **62**A, the rectifying circuit **810** shown in FIG. **50**C replaces the rectifying circuit **510**. The ballast detection circuit **1590** is coupled between the rectifying unit **815** and the terminal adapter circuit **541**. One of the rectifying unit **815** and the terminal adapter circuit **541** is coupled to the pines **503** and **504**, and the other one is coupled to the rectifying output terminal **511** and **512**. In the present embodiment, the rectifying unit **815** is coupled to the pins **503** and **504**, and the terminal adapter circuit **541** is coupled to the rectifying output terminal **511** and **512**. Similarly, the ballast detection circuit **1590** detects the signal input through the pins **503** and **504** for determining the input signal whether provided by an electric ballast according to the frequency of the input signal.

In addition, the rectifying circuit **810** may replace the rectifying circuit **510** instead of the rectifying circuit **540**, and the ballast detection circuit **1590** is coupled between the rectifying unit **815** and the terminal adapter circuit **541** in the rectifying circuit **510**.

FIG. **62**C is a block diagram of a ballast detection circuit according to an embodiment of the present invention. The ballast detection circuit **1590** comprises a detection circuit **1590***a* and a switch circuit **1590***b*. The switch circuit **1590***b* is coupled to switch terminals **1591** and **1592**. The detection circuit **1590***a* is coupled to the detection terminals **1593** and **1594** for detecting a signal transmitted through the detection terminals **1593** and **1594**. Alternatively, the switch terminals **1591** and **1592** serves as the detection terminals and the detection terminals **1593** and **1594** are omitted. For example, in certain embodiments, the switch circuit **1590***b* and the detection circuit **1590***a* are commonly coupled to the switch terminals **1591** and **1592**, and the detection circuit **1590***a* detects a signal transmitted through the switch terminals **1591** and **1592**. Hence, the detection terminals **1593** and **1594** are depicted by dotted lines.

FIG. **62**D is a schematic diagram of a ballast detection circuit according to an embodiment of the present invention. The ballast detection circuit **1690** comprises a detection circuit **1690***a* and a switch circuit **1690***b*, and is coupled between the switch terminals **1591** and **1592**. The detection circuit **1690***a* comprises a symmetrical trigger diode **1691**, resistors **1692** and **1696** and capacitors **1693**, **1697** and **1698**. The switch circuit **1690***b* comprises a TRIAC **1699** and an inductor **1694**.

The capacitor **1698** is coupled between the switch terminals **1591** and**1592** for generating a detection voltage in response to a signal transmitted through the switch terminals **1591** and**1592**. When the signal is a high frequency signal, the capacitive reactance of the capacitor **1698** is fairly low and so the detection voltage generated thereby is quite high. The resistor **1692** and the capacitor **1693** are connected in series and coupled between two ends of the capacitor **1698**. The serially connected resistor **1692** and the capacitor **1693** is used to filter the detection signal generated by the capacitor **1698** and generates a filtered detection signal at a connection node thereof. The filter function of the resistor **1692** and the capacitor **1693** is used to filter high frequency noise in the detection signal for preventing the switch circuit **1690***b* from misoperation due to the high frequency noise. The resistor **1696** and the capacitor **1697** are connected in series and coupled between two ends of the capacitor **1693**, and transmit the filtered detection signal to one end of the symmetrical trigger diode**1691**. The serially connected resistor **1696** and capacitor **1697** performs second filtering of the filtered detection signal to enhance the filter effect of the detection circuit **1690***a*. Based on requirement for filtering level of different application, the capacitor **1697** may be omitted and the end of the symmetrical trigger diode **1691** is coupled to the connection node of the resistor **1692** and the capacitor **1693** through the resistor **1696**. Alternatively, both of the resistor **1696** and the capacitor **1697** are omitted and the end of the symmetrical trigger diode **1691** is directly coupled to the connection node of the resistor **1692** and the capacitor **1693**. Therefore, the resistor **1696** and the capacitor **1697** are depicted by dotted lines. The other end of the symmetrical trigger diode **1691** is coupled to a control end of the TRIAC **1699** of the switch circuit **1690***b*. The symmetrical trigger diode **1691** determines whether to generate a control signal **1695** to trigger the TRIAC **1699** on according to a level of a received signal. A first end of the TRIAC **1699** is coupled to the switch terminal **1591** and a second end thereof is coupled to the switch terminal through the inductor **1694**. The inductor **1694** is used to protect the TRIAC **1699** from damage due to a situation where the signal transmitted into the switch terminals **1591** and **1592** is over a maximum rate of rise of Commutation Voltage, a peak repetitive forward (off-state) voltage or a maximum rate of change of current.

When the switch terminals **1591** and **1592** receive a low frequency signal or a DC signal, the detection signal generated by the capacitor **1698** is high enough to make the symmetrical trigger diode **1691** generate the control signal **1695** to trigger the TRIAC **1699** on. At this time, the switch terminals **1591** and **1592** are shorted to bypass the circuit(s)

connected in parallel with the switch circuit **1690***b*, such as a circuit coupled between the switch terminals **1591** and **1592**, the detection circuit **1690***a* and the capacitor **1698**.

In some embodiments, when the switch terminals **1591** and **1592** receive a high frequency AC signal, the detection signal generated by the capacitor **1698** is not high enough to make the symmetrical trigger diode **1691** generate the control signal **1695** to trigger the TRIAC **1699** on. At this time, the TRIAC **1699** is cut off and so the high frequency AC signal is mainly transmitted through external circuit or the detection circuit **1690***a*.

Hence, the ballast detection circuit **1690** can determine whether the input signal is a high frequency AC signal provided by an electric ballast. If yes, the high frequency AC signal is transmitted through the external circuit or the detection circuit **1690***a*; if no, the input signal is transmitted through the switch circuit **1690***b*, bypassing the external circuit and the detection circuit **1690***a*.

It is worth noting that the capacitor **1698** may be replaced by external capacitor(s), such as at least one capacitor in the terminal adapter circuits shown in FIG. **51**A-C. Therefore, the capacitor **1698** may be omitted and be therefore depicted by a dotted line.

FIG. **62**E is a schematic diagram of a ballast detection circuit according to an embodiment of the present invention. The ballast detection circuit **1790** comprises a detection circuit **1790***a* and a switch circuit **1790***b*. The switch circuit **1790***b* is coupled between the switch terminals **1591** and**1592**. The detection circuit **1790***a* is coupled between the detection terminals **1593** and**1594**. The detection circuit **1790***a* comprises inductors **1791** and **1792** with mutual induction, capacitor **1793** and **1796**, a resistor **1794** and a diode **1797**. The switch circuit **1790***b* comprises a switch **1799**. In the present embodiment, the switch **1799** is a P-type Depletion Mode MOSFET, which is cut off when the gate voltage is higher than a threshold voltage and conducted when the gate voltage is lower than the threshold voltage.

The inductor **1792** is coupled between the detection terminals **1593** and **1594** and induces a detection voltage in the inductor **1791** based on a current signal flowing through the detection terminals **1593** and **1594**. The level of the detection voltage is varied with the frequency of the current signal, and may be increased with the increasing of that frequency and reduced with the decreasing of that frequency.

In some embodiments, when the signal is a high frequency signal, the inductive reactance of the inductor **1792** is quite high and so the inductor **1791** induces the detection voltage with a quite high level. When the signal is a low frequency signal or a DC signal, the inductive reactance of the inductor **1792** is quite low and so the inductor **1791** induces the detection voltage with a quite high level. One end of the inductor **1791** is grounded. The serially connected capacitor **1793** and resistor **1794** is connected in parallel with the inductor **1791**. The capacitor **1793** and resistor **1794** receive the detection voltage generated by the inductor **1791** and filter a high frequency component of the detection voltage to generate a filtered detection voltage. The filtered detection voltage charges the capacitor **1796** through the diode **1797** to generate a control signal **1795**. Due to the diode **1797** providing a one-way charge for the capacitor **1796**, the level of control signal generated by the capacitor **1796** is the maximum value of the detection voltage. The capacitor **1796** is coupled to the control end of the switch **1799**. First and second ends of the switch **1799** are respectively coupled to the switch terminals **1591** and **1592**.

When the signal received by the detection terminal **1593** and **1594** is a low frequency signal or a DC signal, the control signal **1795** generated by the capacitor **1796** is lower than the threshold voltage of the switch **1799** and so the switch **1799** are conducted. At this time, the switch terminals **1591** and **1592** are shorted to bypass the external circuit(s) connected in parallel with the switch circuit **1790***b*, such as the least one capacitor in the terminal adapter circuits show in FIG. **51**A-c.

When the signal received by the detection terminal **1593** and **1594** is a high frequency signal, the control signal **1795** generated by the capacitor **1796** is higher than the threshold voltage of the switch **1799** and so the switch **1799** are cut off. At this time, the high frequency signal is transmitted by the external circuit(s).

Hence, the ballast detection circuit **1790** can determine whether the input signal is a high frequency AC signal provided by an electric ballast. If yes, the high frequency AC signal is transmitted through the external circuit(s); if no, the input signal is transmitted through the switch circuit **1790***b*, bypassing the external circuit.

Next, exemplary embodiments of the conduction (bypass) and cut off (not bypass) operations of the switch circuit in the ballast detection circuit of an LED lamp will be illustrated. For example, the switch terminals **1591** and **1592** are coupled to a capacitor connected in series with the LED lamp, e.g., a signal for driving the LED lamp also flows through the capacitor. The capacitor may be disposed inside the LED lamp to be connected in series with internal circuit(s) or outside the LED lamp to be connected in series with the LED lamp. Referring to FIG. **49**A, **49**B, or **49**D, the AC power supply **508** provides a low voltage and low frequency AC driving signal as an external driving signal to drive the LED tube lamp **500** while the lamp driving circuit **505** does not exist. At this moment, the switch circuit of the ballast detection circuit is conducted, and so the alternative driving signal is provided to directly drive the internal circuits of the LED tube lamp **500**. When the lamp driving circuit **505** exists, the lamp driving circuit **505** provides a high voltage and high frequency AC driving signal as an external driving signal to drive the LED tube lamp **500**. At this moment, the switch circuit of the ballast detection circuit is cut off, and so the capacitor is connected in series with an equivalent capacitor of the internal circuit(s) of the LED tube lamp for forming a capacitive voltage divider network. Thereby, a division voltage applied in the internal circuit(s) of the LED tube lamp is lower than the high voltage and high frequency AC driving signal, e.g.: the division voltage is in a range of 100-270V, and so no over voltage causes the internal circuit(s) damage. Alternatively, the switch terminals **1591** and **1592** is coupled to the capacitor(s) of the terminal adapter circuit shown in FIG. **51**A to FIG. **51**C to have the signal flowing through the half-wave node as well as the capacitor(s), e.g., the capacitor **642** in FIG. **51**A, or the capacitor **842** in FIG. **51**C. When the high voltage and high frequency AC signal generated by the lamp driving circuit **505** is input, the switch circuit is cut off and so the capacitive voltage divider is performed; and when the low frequency AC signal of the commercial power or the direct current of battery is input, the switch circuit bypasses the capacitor(s).

It is worth noting that the switch circuit may have plural switch unit to have two or more switch terminal for being connected in parallel with plural capacitors, (e.g., the capacitors **645** and **645** in FIG. **51**A, the capacitors **643**, **645** and **646** in FIG. **51**A, the capacitors **743** and **744** or/and the capacitors **745** and **746** in FIG. **50**B, the capacitors **843** and **844** in FIG. **51**C, the capacitors **845** and **846** in FIG. **51**C, the capacitors **842**, **843** and **844** in FIG. **51**C, the capacitors **842**,

845 and 846 in FIG. 51C, and the capacitors 842, 843, 844, 845 and 846 in FIG. 51C) for bypassing the plural capacitor.

In addition, the ballast detection circuit of the present invention can be used in conjunction with the mode switching circuits shown in FIG. 57A-57I. The switch circuit of the ballast detection circuit is replaced with the mode switching circuit. The detection circuit of the ballast detection circuit is coupled to one of the pins 501, 502, 503 and 504 for detecting the signal input into the LED lamp through the pins 501, 502, 503 and 504. The detection circuit generates a control signal to control the mode switching circuit being at the first mode or the second mode according to whether the signal is a high frequency, low frequency or DC signal, i.e., the frequency of the signal.

For example, when the signal is a high frequency signal and higher than a defined mode switch frequency, such as the signal provided by the lamp driving circuit 505, the control signal generated by the detection circuit makes the mode switching circuit be at the second mode for directly inputting the filtered signal into the LED module. When the signal is a low frequency signal or a direct signal and lower than the defined mode switch frequency, such as the signal provided by the commercial power or the battery, the control signal generated by the detection circuit makes the mode switching circuit be at the first mode for directly inputting the filtered signal into the driving circuit.

FIG. 63A is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. 60A, the present embodiment comprises the rectifying circuits 510 and 540, the filtering circuit 520, the LED driving module 530, the two filament-simulating circuits 1560, and further comprises an auxiliary power module 2510. The auxiliary power module 2510 is coupled between the filtering output terminal 521 and 522. The auxiliary power module 2510 detects the filtered signal in the filtering output terminals 521 and 522, and determines whether providing an auxiliary power to the filtering output terminals 521 and 522 based on the detected result. When the supply of the filtered signal is stopped or a level thereof is insufficient, i.e., when a drive voltage for the LED module is below a defined voltage, the auxiliary power module provides auxiliary power to keep the LED driving module 530 continuing to emit light. The defined voltage is determined according to an auxiliary power voltage of the auxiliary power module 2510. The rectifying circuit 540 and the filament-simulating circuit 1560 may be omitted and are therefore depicted by dotted lines.

FIG. 63B is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to that shown in FIG. 63A, the present embodiment comprises the rectifying circuits 510 and 540, the filtering circuit 520, the LED driving module 530, the two filament-simulating circuits 1560, and the LED driving module 530 further comprises the driving circuit 1530 and the LED module 630. The auxiliary power module 2510 is coupled between the driving output terminals 1521 and 1522.

The auxiliary power module 2510 detects the driving signal in the driving output terminals 1521 and 1522, and determines whether to provide an auxiliary power to the driving output terminals 1521 and 1522 based on the detected result. When the driving signal is no longer being supplied or a level thereof is insufficient, the auxiliary power module provides the auxiliary power to keep the LED module 630 continuously light. The rectifying circuit 540 and the filament-simulating circuit 1560 may be omitted and are therefore depicted by dotted lines.

FIG. 63C is a schematic diagram of an auxiliary power module according to an embodiment of the present invention. The auxiliary power module 2610 comprises an energy storage unit 2613 and a voltage detection circuit 2614. The auxiliary power module further comprises an auxiliary power positive terminal 2611 and an auxiliary power negative terminal 2612 for being respectively coupled to the filtering output terminals 521 and 522 or the driving output terminals 1521 and 1522. The voltage detection circuit 2614 detects a level of a signal at the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612 to determine whether releasing outward the power of the energy storage unit 2613 through the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612.

In the present embodiment, the energy storage unit 2613 is a battery or a supercapacitor. When a voltage difference of the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612 (the drive voltage for the LED module) is higher than the auxiliary power voltage of the energy storage unit 2613, the voltage detection circuit 2614 charges the energy storage unit 2613 by the signal in the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612. When the drive voltage is lower than the auxiliary power voltage, the energy storage unit 2613 releases the stored energy outward through the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612.

The voltage detection circuit 2614 comprises a diode 2615, a bipolar junction transistor (BJT) 2616 and a resistor 2617. A positive end of the diode 2615 is coupled to a positive end of the energy storage unit 2613 and a negative end of the diode 2615 is coupled to the auxiliary power positive terminal 2611. The negative end of the energy storage unit 2613 is coupled to the auxiliary power negative terminal 2612. A collector of the BJT 2616 is coupled to the auxiliary power positive terminal 2611, and the emitter thereof is coupled to the positive end of the energy storage unit 2613. One end of the resistor 2617 is coupled to the auxiliary power positive terminal 2611 and the other end is coupled to a base of the BJT 2616. When the collector of the BJT 2616 is a cut-in voltage higher than the emitter thereof, the resistor 2617 conducts the BJT 2616. When the power source provides power to the LED tube lamp normally, the energy storage unit 2613 is charged by the filtered signal through the filtering output terminals 521 and 522 and the conducted BJT 2616 or by the driving signal through the driving output terminals 1521 and 1522 and the conducted BJT 2616 unit that the collector-emitter voltage of the BJT 2616 is lower than or equal to the cut-in voltage. When the filtered signal or the driving signal is no longer being supplied or the level thereof is insufficient, the energy storage unit 2613 provides power through the diode 2615 to keep the LED driving module 530 or the LED module 630 continuously light.

It is worth noting that in some embodiments, the maximum voltage of the charged energy storage unit 2613 is the cut-in voltage of the BJT 2616 lower than a voltage difference applied between the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612. The voltage difference provided between the auxiliary power positive terminal 2611 and the auxiliary power negative terminal 2612 is a turn-on voltage of the diode 2615 lower than the voltage of the energy storage unit 2613. Hence, when the auxiliary power module 2610 provides power, the

voltage applied at the LED module **630** is lower (about the sum of the cut-in voltage of the BJT **2616** and the turn-on voltage of the diode **2615**). In the embodiment shown in the FIG. **63**B, the brightness of the LED module **630** is reduced when the auxiliary power module supplies power thereto. Thereby, when the auxiliary power module is applied to an emergency lighting system or a constant lighting system, the user realizes the main power supply, such as commercial power, is abnormal and then performs necessary precautions therefor.

FIG. **64** is a block diagram of a power supply module in an LED tube lamp according to an embodiment of the present invention. Compared to the above mentioned embodiments, the circuits for driving the LED module is installed outside of the LED tube lamp. For example, the LED tube lamp **3500** is driven to emit light by an external driving power **3530** through external driving terminals **3501** and **3502**. The LED tube lamp **3500** comprises the LED module **630** and a current control circuit **3510**, and does not comprise the rectifying circuit, filtering circuit and the driving circuit. In the present embodiment, the external driving terminals **3501** and **3502** serve as the pins **501** and **502** shown in FIG. **49**A and FIG. **49**B.

The external driving power **3530** may be directly connected with the commercial power or the ballast for receiving power and converting into an external driving signal to input into the LED tube lamp **3500** through the external driving terminals **3501** and **3502**. The external driving signal may be a DC signal, and may preferably be a stable DC current signal. Under a normal condition, the current control circuit **3510** conducts to have a current flowing through and driving the LED module **630** to emit light. The current control circuit **3510** may further detect the current of the LED module **630** for performing a steady current or voltage control, and have a function of ripple filter. Under an abnormal condition, the current control circuit **3510** is cut off to stop inputting the power of the external driving power **3530** into the LED module **630** and enters into a protection state.

When the current control circuit **3510** determines that the current of the LED module **630** is lower than a defined current or a minimum current of a defined current range, the current control circuit **3510** is completely conducted, i.e., the impedance of the current control circuit **3510** comes down a minimum value.

When the current control circuit **3510** determines that the current of the LED module **630** is higher than a defined current or a maximum current of a defined current range, the current control circuit **3510** is cutoff to stop inputting power into the LED tube lamp **3500**. The maximum current of a defined current range is in some embodiments set at a value about 30% higher than a rated current of the LED module **630**. Thereby, the current control circuit **3510** can keep the brightness of the LED lamp as much as possible when a driving capability of the external driving power **3530** is reduced. Furthermore, the current control circuit **3510** can prevent the LED module **630** from over current when the driving capability of the external driving power **3530** is abnormally increased. Hence, the current control circuit **3510** has a function of over-current protection.

It is worth noting that the external driving power **3530** may be a DC voltage signal. Under a normal condition, the current control circuit **3510** stabilizes the current of the LED module **630** or controls the current linearly, e.g, the current of the LED module **630** is varied linearly with a level of the DC voltage signal. For controlling the current of the LED module at a current value or linearly, a voltage cross the current control circuit **3510** is increased with the level of the DC voltage signal provided by the external driving power **3530** and a power consumption thereof is also increased. The current control circuit **3510** may have a temperature detector. When the level of the DC voltage signal provided by the external driving power **3530** is over a high threshold, the current control circuit **3510** enters into a state of over temperature protection to stop inputting power of the external driving power **3530** into the LED tube lamp **3500**. For example, when the temperature detector detects the temperature of the current control circuit **3510** at 120° C., the current control circuit **3510** enters into the state of over temperature protection. Thereby, the current control circuit **3510** has both over temperature and over voltage protections.

In some embodiments, due to the external driving power, the length of the end caps are shortened. For ensuring the total length of the LED tube lamp to conform to a standard for a fluorescent lamp, a length of the lamp tube is lengthened to compensate the shortened length of the end caps. Due to the lengthened length of the lamp tube, the LED light string is correspondingly lengthened. Therefore, the interval of adjacent two LEDs disposed on the LED light string becomes greater under the same illuminance requirement. The greater interval increases the heat dissipation of the LEDs and so the operation temperature of the LEDs is lowered and the life-span of the LED tube lamp is extended.

Referring to FIG. **37**, in one embodiment, each of the LED light sources **202** may be provided with an LED lead frame **202***b* having a recess **202***a*, and an LED chip **18** disposed in the recess **202***a*. The recess **202***a* may be one or more than one in amount. The recess **202***a* may be filled with phosphor covering the LED chip **18** to convert emitted light therefrom into a desired light color. Compared with a conventional LED chip being a substantial square, the LED chip **18** in this embodiment may be preferably rectangular with the dimension of the length side to the width side at a ratio ranges generally from about 2:1 to about 10:1, in some embodiments from about 2.5:1 to about 5:1, and in some more desirable embodiments from about 3:1 to about 4.5:1. Moreover, the LED chip **18** is in some embodiments arranged with its length direction extending along the length direction of the lamp tube **1** to increase the average current density of the LED chip **18** and improve the overall illumination field shape of the lamp tube **1**. The lamp tube **1** may have a number of LED light sources **202** arranged into one or more rows, and each row of the LED light sources **202** is arranged along the length direction (Y-direction) of the lamp tube **1**.

Referring again to FIG. **37**, the recess **202***a* is enclosed by two parallel first sidewalls **15** and two parallel second sidewalls **16** with the first sidewalls **15** being lower than the second sidewalls **16**. The two first sidewalls **15** are arranged to be located along a length direction (Y-direction) of the lamp tube **1** and extend along the width direction (X-direction) of the lamp tube **1**, and two second sidewalls **16** are arranged to be located along a width direction (X-direction) of the lamp tube **1** and extend along the length direction (Y-direction) of the lamp tube **1**. The extending direction of the first sidewalls **15** may be substantially rather than exactly parallel to the width direction (X-direction) of the lamp tube **1**, and the first sidewalls may have various outlines such as zigzag, curved, wavy, and the like. Similarly, the extending direction of the second sidewalls **16** may be substantially rather than exactly parallel to the length direction (Y-direction) of the lamp tube **1**, and the second sidewalls may have various outlines such as zigzag, curved, wavy, and the like.

In one row of the LED light sources **202**, the arrangement of the first sidewalls **15** and the second sidewalls **16** for each LED light source **202** can be same or different.

Having the first sidewalls **15** being lower than the second sidewalls **16** and proper distance arrangement, the LED lead frame **202***b* allows dispersion of the light illumination to cross over the LED lead frame **202***b* without causing uncomfortable visual feeling to people observing the LED tube lamp along the Y-direction. In some embodiments, the first sidewalls **15** may not be lower than the second sidewalls, however, and in this case the rows of the LED light sources **202** are more closely arranged to reduce grainy effects. On the other hand, when a user of the LED tube lamp observes the lamp tube thereof along the X-direction, the second sidewalls **16** also can block user's line of sight from seeing the LED light sources **202**, and which reduces unpleasing grainy effects.

Referring again to FIG. **37**, the first sidewalls **15** each includes an inner surface **15***a* facing toward outside of the recess **202***a*. The inner surface **15***a* may be designed to be an inclined plane such that the light illumination easily crosses over the first sidewalls **15** and spreads out. The inclined plane of the inner surface **15***a* may be flat or cambered or combined shape. In some embodiments, when the inclined plane is flat, the slope of the inner surface **15***a* ranges from about 30 degrees to about 60 degrees. Thus, an included angle between the bottom surface of the recess **202***a* and the inner surface **15***a* may range from about 120 to about 150 degrees. In some embodiments, the slope of the inner surface **15***a* ranges from about 15 degrees to about 75 degrees, and the included angle between the bottom surface of the recess **202***a* and the inner surface **15***a* ranges from about 105 degrees to about 165 degrees.

There may be one row or several rows of the LED light sources **202** arranged in a length direction (Y-direction) of the lamp tube **1**. In case of one row, in one embodiment, the second sidewalls **16** of the LED lead frames **202***b* of all of the LED light sources **202** located in the same row are disposed in same straight lines to respectively form two walls for blocking the user's line of sight seeing the LED light sources **202**. In case of several rows, in some embodiments, only the LED lead frames **202***b* of the LED light sources **202** disposed in the outermost two rows are disposed in same straight lines to respectively form walls for blocking user's line of sight seeing the LED light sources **202**. In case of several rows, it may be required only that the LED lead frames **202***b* of the LED light sources **202** disposed in the outermost two rows are disposed in same straight lines to respectively from walls for blocking user's line of sight seeing the LED light sources **202**. The LED lead frames **202***b* of the LED light sources **202** disposed in the other rows can have different arrangements. For example, as far as the LED light sources **202** located in the middle row (third row) are concerned, the LED lead frames **202***b* thereof may be arranged such that: each LED lead frame **202***b* has the first sidewalls **15** arranged along the length direction (Y-direction) of the lamp tube **1** with the second sidewalls **16** arranged along in the width direction (X-direction) of the lamp tube **1**; each LED lead frame **202***b* has the first sidewalls **15** arranged along the width direction (X-direction) of the lamp tube **1** with the second sidewalls **16** arranged along the length direction (Y-direction) of the lamp tube **1**; or the LED lead frames **202***b* are arranged in a staggered manner. To reduce grainy effects caused by the LED light sources **202** when a user of the LED tube lamp observes the lamp tube thereof along the X-direction, it may be enough to have the second sidewalls **16** of the LED lead frames **202***b* of the LED light sources **202** located in the outmost rows to block user's line of sight from seeing the LED light sources **202**. Different arrangements may be used for the second sidewalls **16** of the LED lead frames **202***b* of one or several of the LED light sources **202** located in the outmost two rows.

In summary, when a plurality of the LED light sources **202** are arranged in a row extending along the length direction of the lamp tube **1**, the second sidewalls **16** of the LED lead frames **202***b* of all of the LED light sources **202** located in the same row may be disposed in same straight lines to respectively form walls for blocking user's line of sight seeing the LED light sources **202**. When a plurality of the LED light sources **202** are arranged in a number of rows being located along the width direction of the lamp tube **1** and extending along the length direction of the lamp tube **1**, the second sidewalls **16** of the LED lead frames **202***b* of all of the LED light sources **202** located in the outmost two rows may be disposed in straight lines to respectively form two walls for blocking user's line of sight seeing the LED light sources **202**. The one or more than one rows located between the outmost rows may have the first sidewalls **15** and the second sidewalls **16** arranged in a way the same as or different from that for the outmost rows.

As to FIG. **65**, FIG. **65** illustrates a block diagram of an exemplary power supply module in an LED tube lamp according to one embodiment of the present invention. This embodiment is a combination of some features described in FIGS. **2**, **52**D, **51**A, **50**C, **52**B, and **53**A. According to this embodiment, the LED tube lamp comprises a lamp tube **1**, a heat shrink sleeve **190** covering on an outer surface of the lamp tube **1**, an LED light strip **2** in the lamp tube **1**, a plurality of LED light sources **202** (similar to LEDs **631** in FIG. **53**A) on the LED light strip **2**, two end caps **3** respectively coupled to two opposite ends of the lamp tube **1**, and a power supply circuit **258** on the light strip **2**. The power supply circuit **258** comprises a plurality of electronic components.

The LED light strip **2** with the plurality of LED light sources **202** and power supply circuit **258** is in the lamp tube **1**. In other words, all the electronic components of the power supply circuit **258** are on the light strip **2**. Each of the end caps **3** comprises two conductive pins **301** for receiving an external driving signal. The electrical connection between the LED light strip **2** and the pins **301** may be achieved by wire bonding.

In one embodiment, the thickness of the heat shrink sleeve **190** is from 20 um to 200 um and the heat shrink sleeve **190** is substantially transparent with respect to wavelength of light from the plurality of LED light sources **202**.

In one embodiment, the LED tube lamp further comprises a reflective film **12** on an inner circumferential surface of the lamp tube **1**. The ratio of a circumferential length of the reflective film **12** along the inner circumferential surface of the lamp tube **1** to a circumferential length of the lamp tube **1** is about 0.3 to 0.5. The reflective film **12** has an opening **12***a* for accommodating the LED light strip **2**.

In one embodiment, the LED tube lamp further comprises a diffusion film **13** on the inner surface of the lamp tube **1**.

In one embodiment, the LED light strip **2** has a widened part occupying a circumference area of the inner surface of the lamp tube **1** and a ratio of the length of the LED light strip **2** along the circumferential direction to the circumferential length of the lamp tube **1** is about 0.3 to 0.5.

In one embodiment, the LED light strip **2** is fixed by an adhesive sheet to an inner circumferential surface of the lamp tube.

In one embodiment, the power supply circuit **258** comprises a rectifying circuit **810**, a filtering circuit **623**, and an LED module **630**. The rectifying circuit **810** is configured to receive and rectify the external driving signal from the two pins **301** (shown as pins **501** and **502** in FIG. **65**) of corresponding one of the end caps **3** and then produce a rectified signal. In this embodiment, the power supply circuit **258** may comprise two rectifying circuits **810** (similar to the rectifying circuits **810** in FIG. **50**C), which may respectively correspond to the rectifying circuit **510** and the rectifying circuit **540** mentioned above in FIG. **49**E.

The filtering circuit **623** is connected to the rectifying circuit **810** and configured to produce a filtered signal. In one embodiment, the power supply circuit **258** may comprise two filtering circuits **623** and the filtering circuits **623** may be referred to as filtering units **623** of FIG. **52**B. Each of the filtering circuits **623** filters the rectified signal as from corresponding one of the rectifying circuits **810** to produce a filtered signal. The LED module **630** has the plurality of LED light sources **202** (**631**) for receiving the filtered signal and emitting light.

"Corresponding" in above paragraph means the electrical circuit/component on the same side of the lamp tube **1**. For example, the rectifying circuit **810** on the left side of FIG. **65** corresponds to the end cap **3** on the left side, and the two pins **301** on the left side, the filtering circuit **623** on the left side, if any. Likewise, the rectifying circuit **810** on the right side of FIG. **65** if any corresponds to the end cap **3** on the right side and the two pins **301** on the right side, and the filtering circuit **623** on the right side, if any.

The power supply circuit **258** may further comprise a filtering unit **824** as mentioned above in FIG. **52**D. The filtering unit **824** is connected between one pin of one of the two end caps and the rectifying circuit **810**. In some embodiments, the filtering unit **824** comprises an inductor **828**. The rectifying circuit **810** comprises a current-limiting capacitor **642** and a rectifying unit **815** connected with the current-limiting capacitor **642**. The filtering circuit **623** comprises a capacitor **625**. In this embodiment, the power supply circuit **258** may comprise four filtering units **824** as shown in FIG. **65** (the filtering unit **824** is similar to that in FIG. **52**D). The filtering units **824** are, respectively, connected between the four pins **301** and the corresponding rectifying circuits **810**. Specifically, the pins **301** on the left side are connected to the rectifying circuit **810** on the left side of the FIG. **65** while the pins **301** on the right side are connected to the rectifying circuit **810** on the right side of the FIG. **65**. In one embodiment, the filtering units **824** each comprise an inductor **828**. And each of the rectifying circuits **810** comprises a current-limiting capacitor **642** and a half-wave rectifying unit **815** connected with the current-limiting capacitor **642**. It should be noted that current-limiting capacitor **642** can be a part of, or be regarded as belonging to, a terminal adapter circuit **541** introduced in FIGS. **50**C and **50**D and also marked in FIG. **65**. And each of the four inductors **828** in FIG. **65** can alternatively be regarded as a part of the terminal adapter circuit **541** in FIG. **65**, since it's mentioned above that a terminal adapter circuit **541** (as in FIGS. **50**C and **50**D) may comprise a resistor, a capacitor, an inductor, or any combination thereof.

In one embodiment, each of the end caps **3** comprises a plurality of openings **304** formed one the end caps. The plurality of openings **304** of one of the end caps **3** are symmetric to each other with respect to a plane passing through the middle of a line connecting the two pins **301** and perpendicular to the line connecting the two pins **301**. The number of the openings **304** on one of the end caps **3** is two. Alternatively, the number of the plurality of openings **304** on one of the end caps is three and the three openings **304** are arranged in a shape of an arc. All the electronic components of the power supply circuit **258** including the rectifying circuits **810**, the filtering circuits **623**, the LED module **630**, and the filtering units **824** are on the LED light strip **2**. The filtering units **824** are inductors **828** and the inductors **828** are closer to the openings **304** of corresponding one of the end caps **3**. Accordingly, heat from the inductors **828** may be dissipated more efficiently.

In one embodiment, the LED tube lamp further comprises a hot melt adhesive. The end caps **3** are adhered, respectively, to opposite ends of the lamp tube **1** via the hot melt adhesive.

The LED tube lamps according to various different embodiments of the present invention are described as above. With respect to an entire LED tube lamp, the features including "having the structure-strengthened end region", "adopting the bendable circuit sheet as the LED light strip", "coating the adhesive film on the inner surface of the lamp tube", "coating the diffusion film on the inner surface of the lamp tube", "covering the diffusion film in form of a sheet above the LED light sources", "coating the reflective film on the inner surface of the lamp tube", "the end cap including the thermal conductive member", "the end cap including the magnetic metal member", "the LED light source being provided with the lead frame", and "utilizing the circuit board assembly to connect the LED light strip and the power supply" may be applied in practice singly or integrally such that only one of the features is practiced or a number of the features are simultaneously practiced.

Furthermore, any of the features "having the structure-strengthened end region", "adopting the bendable circuit sheet as the LED light strip", "coating the adhesive film on the inner surface of the lamp tube", "coating the diffusion film on the inner surface of the lamp tube", "covering the diffusion film in form of a sheet above the LED light sources", "coating the reflective film on the inner surface of the lamp tube", "the end cap including the thermal conductive member", "the end cap including the magnetic metal member", "the LED light source being provided with the lead frame", "utilizing the circuit board assembly (including a long circuit sheet and a short circuit board) to connect the LED light strip and the power supply", "a rectifying circuit", "a filtering circuit", "a driving circuit", "a terminal adapter circuit", "an anti-flickering circuit", "a protection circuit", "a mode switching circuit", "an overvoltage protection circuit", "a ballast detection circuit", "a ballast-compatible circuit", "a filament-simulating circuit", and "an auxiliary power module" includes any related technical points and their variations and any combination thereof as described in the abovementioned embodiments of the present invention.

As an example, the feature "having the structure-strengthened end region" may include "the lamp tube includes a main body region, a plurality of rear end regions, and a transition region connecting the main body region and the rear end regions, wherein the two ends of the transition region are arc-shaped in a cross-section view along the axial direction of the lamp tube; the rear end regions are respectively sleeved with end caps; the outer diameter of at least one of the rear end regions is less than the outer diameter of the main body region; the end caps have same outer diameters as that of the main body region."

As an example, the feature "adopting the bendable circuit sheet as the LED light strip" includes "the connection between the bendable circuit sheet and the power supply is by way of wire bonding or soldering bonding; the bendable

circuit sheet includes a wiring layer and a dielectric layer arranged in a stacked manner; the bendable circuit sheet has a circuit protective layer made of ink to reflect lights and has widened part along the circumferential direction of the lamp tube to function as a reflective film."

As an example, the feature "coating the diffusion film on the inner surface of the lamp tube" may include "the composition of the diffusion film includes calcium carbonate, halogen calcium phosphate and aluminum oxide, or any combination thereof, and may further include thickener and a ceramic activated carbon; the diffusion film may be a sheet covering the LED light source."

As an example, the feature "coating the reflective film on the inner surface of the lamp tube" may include "the LED light sources are disposed above the reflective film, within an opening in the reflective film or beside the reflective film."

As an example, the feature "the end cap including the thermal conductive member" may include "the end cap includes an electrically insulating tube, the hot melt adhesive is partially or completely filled in the accommodation space between the inner surface of the thermal conductive member and the outer surface of the lamp tube." The feature "the end cap including the magnetic metal member" may include "the magnetic metal member is circular or non-circular, has openings or indentation/embossment to reduce the contact area between the inner peripheral surface of the electrically insulating tube and the outer surface of the magnetic metal member; has supporting portions and protruding portions to support the magnetic metal member or reduce the contact area between the electrically insulating tube and the magnetic metal member."

As an example, the feature "the LED light source being provided with the lead frame" may include "the lead frame has a recess for receive an LED chip, the recess is enclosed by first sidewalls and second sidewalls with the first sidewalls being lower than the second sidewalls, wherein the first sidewalls are arranged to locate along a length direction of the lamp tube while the second sidewalls are arranged to locate along a width direction of the lamp tube."

As an example, the feature "utilizing the circuit board assembly to connect the LED light strip and the power supply" may include "the circuit board assembly has a long circuit sheet and a short circuit board that are adhered to each other with the short circuit board being adjacent to the side edge of the long circuit sheet; the short circuit board is provided with a power supply module to form the power supply; the short circuit board is stiffer than the long circuit sheet."

According to the design of the power supply module, the external driving signal may be low frequency AC signal (e.g., commercial power), high frequency AC signal (e.g., that provided by a ballast), or a DC signal (e.g., that provided by a battery), input into the LED tube lamp through a drive architecture of single-end power supply or dual-end power supply. For the drive architecture of dual-end power supply, the external driving signal may be input by using only one end thereof as single-end power supply.

The LED tube lamp may omit the rectifying circuit when the external driving signal is a DC signal.

According to the design of the rectifying circuit in the power supply module, there may be a signal rectifying circuit, or dual rectifying circuit. First and second rectifying circuits of the dual rectifying circuit are respectively coupled to the two end caps disposed on two ends of the LED tube lamp. The single rectifying circuit is applicable to the drive architecture of signal-end power supply, and the dual rectifying circuit is applicable to the drive architecture of dual-end power supply. Furthermore, the LED tube lamp having at least one rectifying circuit is applicable to the drive architecture of low frequency AC signal, high frequency AC signal or DC signal.

The single rectifying circuit may be a half-wave rectifier circuit or full-wave bridge rectifying circuit. The dual rectifying circuit may comprise two half-wave rectifier circuits, two full-wave bridge rectifying circuits or one half-wave rectifier circuit and one full-wave bridge rectifying circuit.

According to the design of the pin in the power supply module, there may be two pins in single end (the other end has no pin), two pins in corresponding end of two ends, or four pins in corresponding end of two ends. The designs of two pins in single end two pins in corresponding end of two ends are applicable to signal rectifying circuit design of the of the rectifying circuit. The design of four pins in corresponding end of two ends is applicable to dual rectifying circuit design of the of the rectifying circuit, and the external driving signal can be received by two pins in only one end or in two ends.

According to the design of the filtering circuit of the power supply module, there may be a single capacitor, orπ filter circuit. The filtering circuit filers the high frequency component of the rectified signal for providing a DC signal with a low ripple voltage as the filtered signal. The filtering circuit also further comprises the LC filtering circuit having a high impedance for a specific frequency for conforming to current limitations in specific frequencies of the UL standard. Moreover, the filtering circuit according to some embodiments further comprises a filtering unit coupled between a rectifying circuit and the pin(s) for reducing the EMI.

According to the design of the LED driving module of the power supply module according to some embodiments, the LED driving may comprise the LED module and the driving circuit or only the LED module. The LED module may be connected with a voltage stabilization circuit for prevent the LED module from over voltage. The voltage stabilization circuit may be a voltage clamping circuit, such as zener diode, DIAC and so on. When the rectifying circuit has a capacitive circuit, in some embodiments, two capacitors are respectively coupled between corresponding two pins in two end caps and so the two capacitors and the capacitive circuit as a voltage stabilization circuit perform a capacitive voltage divider.

If there are only the LED module in the LED driving module and the external driving signal is a high frequency AC signal, a capacitive circuit is in at least one rectifying circuit and the capacitive circuit is connected in series with a half-wave rectifier circuit or a full-wave bridge rectifying circuit of the rectifying circuit and serves as a current modulation circuit to modulate the current of the LED module due to that the capacitor equates a resistor for a high frequency signal. Thereby, even different ballasts provide high frequency signals with different voltage levels, the current of the LED module can be modulated into a defined current range for preventing overcurrent. In addition, an energy-releasing circuit is connected in parallel with the LED module. When the external driving signal is no longer supplied, the energy-releasing circuit releases the energy stored in the filtering circuit to lower a resonance effect of the filtering circuit and other circuits for restraining the flicker of the LED module.

In some embodiments, if there are the LED module and the driving circuit in the LED driving module, the driving circuit may be a buck converter, a boost converter, or a

buck-boost converter. The driving circuit stabilizes the current of the LED module at a defined current value, and the defined current value may be modulated based on the external driving signal. For example, the defined current value may be increased with the increasing of the level of the external driving signal and reduced with the reducing of the level of the external driving signal. Moreover, a mode switching circuit may be added between the LED module and the driving circuit for switching the current from the filtering circuit directly or through the driving circuit inputting into the LED module.

A protection circuit may be additionally added to protect the LED module. The protection circuit detects the current and/or the voltage of the LED module to determine whether to enable corresponding over current and/or over voltage protection.

According to the design of the ballast detection circuit of the power supply module, the ballast detection circuit is substantially connected in parallel with a capacitor connected in series with the LED module and determines the external driving signal whether flowing through the capacitor or the ballast detection circuit (i.e., bypassing the capacitor) based on the frequency of the external driving signal. The capacitor may be a capacitive circuit in the rectifying circuit.

According to the design of the filament-simulating circuit of the power supply module, there may be a single set of a parallel-connected capacitor and resistor, two serially connected sets, each having a parallel-connected capacitor and resistor, or a negative temperature coefficient circuit. The filament-simulating circuit is applicable to program-start ballast for avoiding the program-start ballast determining the filament abnormally, and so the compatibility of the LED tube lamp with program-start ballast is enhanced. Furthermore, the filament-simulating circuit almost does not affect the compatibilities for other ballasts, e.g., instant-start and rapid-start ballasts.

According to the design of the ballast-compatible circuit of the power supply module in some embodiments, the ballast-compatible circuit can be connected in series with the rectifying circuit or connected in parallel with the filtering circuit and the LED driving module. Under the design of being connected in series with the rectifying circuit, the ballast-compatible circuit is initially in a cutoff state and then changes to a conducting state in an objective delay. Under the design of being connected in parallel with the filtering circuit and the LED driving module, the ballast-compatible circuit is initially in a conducting state and then changes to a cutoff state in an objective delay. The ballast-compatible circuit makes the electronic ballast really activate during the starting stage and enhances the compatibility for instant-start ballast. Furthermore, the ballast-compatible circuit almost does not affect the compatibilities with other ballasts, e.g., program-start and rapid-start ballasts.

According to the design of the auxiliary power module of the power supply module, the energy storage unit may be a battery or a supercapacitor, connected in parallel with the LED module. The auxiliary power module is applicable to the LED driving module having the driving circuit.

According to the design of the LED module of the power supply module, the LED module comprises plural strings of LEDs connected in parallel with each other, wherein each LED may have a single LED chip or plural LED chips emitting different spectrums. Each LEDs in different LED strings may be connected with each other to form a mesh connection.

Referring to FIG. **66** and FIG. **67**, the instant disclosure provides an embodiment of an LED tube lamp **50** which comprises a tube **100**, an LED light strip **200**, and end caps **300**. The LED light strip **200** is disposed inside the tube **100**. Two end caps **300** are respectively disposed on two ends of the tube **100**. The LED tube lamp **100** can be a plastic tube, a glass tube, a plastic-metal combined tube, or a glass-metal combined tube. The two end caps **300** can have the same size or have different sizes. Referring to FIG. **67**, several LED light sources **202** are disposed on the LED light strip **200**, and a power supply **400** is disposed in the end cap **300**. The power supply **400** may be in the form of a single integrated unit (e.g., with all components of the power supply **400** are within a body) disposed in an end cap **300** at one end of the tube **100**. Alternatively, the power supply **400** may be in form of two separate parts (e.g., with the components of the power supply **400** are separated into two pieces) respectively disposed in two end caps **300**. The LED light sources **202** and the power supply **400** can be electrically connected to each other via the LED light strip **200**. The LED light strip **200** can be a bendable circuit sheet. Moreover, in some embodiments, the length of the bendable circuit sheet is greater than the length of the tube **100** (not including the length of the two end caps **300** respectively connected to two ends of the tube **100**), or at least greater than a central portion of the tube **100** between two transition regions (e.g., where the circumference of the tube narrows) on either end. In one embodiment, the longitudinally projected length of the bendable circuit sheet as the LED light strip **200** is larger than the length of the tube **100**. Middle part of the LED light strip **200** can be mounted on the inner surface of the tube **100**. Instead, two opposite, short edges of the LED light strip **200** are not mounted on the inner surface of the tube **100**. The LED light strip **200** comprises two freely extending end portions **210**. The two freely extending end portions **210** are respectively disposed on the two opposite, short edges of the LED light strip **200**. The two freely extending end portions **210** respectively extend outside the tube **100** through two holes at two opposite ends of the tube **100** along the axial direction of the tube **100**. The two freely extending end portions **210** can respectively extend to inside area of the end caps **300** and can be electrically connected to the power supply **400**. Each of the end caps **300** comprises a pair of hollow conductive pins **301** utilized for being connected to an outer electrical power source. When the LED tube lamp **50** is installed to a lamp base, the hollow conductive pins **301** are plugged into corresponding conductive sockets of the lamp base such that the LED tube lamp **50** can be electrically connected to the lamp base. In one embodiment, the LED light strip **2** includes a bendable circuit sheet having a conductive wiring layer and a dielectric layer that are arranged in a stacked manner, wherein the wiring layer and the dielectric layer have same area or the wiring layer has a bit less area (not shown) than the dielectric layer. The LED light source **202** is disposed on one surface of the wiring layer, the dielectric layer is disposed on the other surface of the wiring layer that is away from the LED light sources **202**. The wiring layer is electrically connected to the power supply **400** to carry direct current (DC) signals. Meanwhile, the surface of the dielectric layer away from the wiring layer is fixed to the inner circumferential surface of the tube **100** by means of the adhesive sheet (not shown). The wiring layer can be a metal layer or a power supply layer including wires such as copper wires.

In another embodiment, the outer surface of the wiring layer or the dielectric layer may be covered with a circuit protective layer made of an ink with function of resisting

soldering and increasing reflectivity (not shown). Alternatively, the dielectric layer can be omitted and the wiring layer can be directly bonded to the inner circumferential surface of the tube **100**, and the outer surface of the wiring layer is coated with the circuit protective layer. Whether the wiring layer has a one-layered, or two-layered structure, the circuit protective layer can be adopted.

In some embodiments, the circuit protective layer is disposed only on one side/surface of the LED light strip **200**, such as the surface having the LED light source **202**. In some embodiments, the bendable circuit sheet is a one-layered structure made of just one wiring layer, or a two-layered structure made of one wiring layer and one dielectric layer, and thus is more bendable or flexible to curl when compared with the conventional three-layered flexible substrate (one dielectric layer sandwiched with two wiring layers). As a result, the bendable circuit sheet of the LED light strip **200** can be installed in a tube with a customized shape or non-tubular shape, and fitly mounted to the inner surface of the tube **100**. The bendable circuit sheet closely mounted to the inner surface of the tube **100***n* is preferable in some cases. In addition, using fewer layers of the bendable circuit sheet improves the heat dissipation and lowers the material cost.

Nevertheless, the bendable circuit sheet is not limited to being one-layered or two-layered; in other embodiments, the bendable circuit sheet may include multiple layers of the wiring layers and multiple layers of the dielectric layers, in which the dielectric layers and the wiring layers are sequentially stacked in a staggered manner, respectively (not shown). These stacked layers are away from the surface of the outermost wiring layer which has the LED light source **202** disposed thereon and is electrically connected to the power supply **400**. Moreover, the projected length of the bendable circuit sheet is greater than the length of the tube **100**.

In one embodiment, the LED light strip **200** includes a bendable circuit sheet having in sequence a first wiring layer, a dielectric layer, and a second wiring layer (not shown). The thickness of the second wiring layer is greater than that of the first wiring layer, and/or the projected length of the LED light strip **200** is greater than that of the tube **100**. The end region of the light strip **200** extending beyond the end portion of the tube **100** without disposition of the light source **202** is formed with two separate through holes to respectively electrically communicate the first wiring layer and the second wiring layer (not shown). The through holes are not communicated to each other to avoid short circuit.

In this way, the greater thickness of the second wiring layer allows the second wiring layer to support the first wiring layer and the dielectric layer, and meanwhile allow the LED light strip **200** to be mounted onto the inner circumferential surface without being liable to shift or deform, and thus the yield rate of product can be improved. In addition, the first wiring layer and the second wiring layer are in electrical communication such that the circuit layout of the first wiring later can be extended downward to the second wiring layer to reach the circuit layout of the entire LED light strip **200**. In some circumstances, the first wiring connects the anode and the second wiring connects the cathode. Moreover, since the land for the circuit layout becomes two-layered, the area of each single layer and therefore the width of the LED light strip **200** can be reduced such that more LED light strips **200** can be put on a production line to increase productivity. Furthermore, the first wiring layer and the second wiring layer of the end region of the LED light strip **200** that extends beyond the end portion of the tube **100** without disposition of the light source **202** can be used to accomplish the circuit layout of a power supply **400** so that the power supply **400** can be directly disposed on the bendable circuit sheet of the LED light strip **200**.

As shown in FIG. **67**, the tube **100** comprises two rear end regions **101**, two transition regions, and one main body region **102**. The two rear end regions **101** are at two opposites ends of the main body region **102**. The two transition regions are respectively between the two rear end regions **101** and the main body region **102**. The two end caps **300** are respectively connected to the two rear end regions **101**. The rear end regions **101** are the portions of the tube **100** shrunk in the radial direction. The rear end regions **101** form shrunk holes. The bore of the rear end region **101** is less than that of the main body region **102**. In other words, in the transition region, the tube **100** narrows, or tapers to have a smaller diameter when moving along the length of the tube **100** from the main body region **102** to the rear end region **101**. The tapering/narrowing may occur in a continuous, smooth manner (e.g., to be a smooth curve without any linear angles). By avoiding angles, in particular any acute angles, the tube **100** is less likely to break or crack under pressure. Furthermore, the transition region is formed by two curves at both ends, wherein one curve is toward inside of the tube **100** and the other curve is toward outside of the tube **100**. For example, one curve closer to the main body region **102** is convex from the perspective of an inside of the tube **100** and one curve closer to the rear end region **101** is concave from the perspective of an inside of the tube **100**. The transition region of the tube **100** in one embodiment includes only smooth curves, and does not include any angled surface portions. As shown in FIG. **816**, the appearance of the LED tube lamp **50** is identical from the tube **100** to the end caps **300**, meaning that the outer surfaces of the end caps **300** are aligned with that of the tube **100**.

Referring to FIG. **68** and FIG. **69**, FIG. **68** is a partial view of the LED tube lamp **50**, and FIG. **69** is a cross section of FIG. **68** along the line A-A'. The end cap **300** of the embodiment further comprises a lateral wall **304**, an end wall **302**, and an opening **320**. The lateral wall **304** is tubular shape. The lateral wall **304** and the tube **100** are coaxial and are connected to each other. More specifically, the lateral wall **304** and the tube **100** are substantially coaxial but the alignment of the axial directions of the lateral wall **304** and the tube **100** may have a slightly shift due to manufacturing tolerance. The end wall **302** is substantially perpendicular to the axial direction of the lateral wall **304**. The end wall **302** is connected to an end of the lateral wall **304** away from the tube **100**. More specifically, the end wall **302** is substantially perpendicular to the axial direction of the lateral wall **304** but the angle between the end wall **302** and the axial direction of the lateral wall **304** may not be exactly 90 degrees maybe due to manufacturing tolerance. This is still within the scope of substantially perpendicular. Even if the end wall **302** relative to the axial direction of the lateral wall **304** is slightly inclined, the end wall **302** and the lateral wall **304** can still form a receiving space for receiving the power supply **400** and can mate the lamp base. The end wall **302** and the lateral wall **304** form an inner space of the end cap **300**. The power supply **400** is disposed in the inner space of the end cap **300**. The opening **320** penetrates through the end wall **302**. The inner space of the end cap **300** can communicate with outside area through the opening **320**. Air can flow through the opening **320** between the inner space of the end cap **300** and outside area. Moreover, the opening **320** is good for pressure releasing, and a light sensor can be

configured inside the end cap **300** to collimate with the opening **320** for light detection and electric-shock prevention during installation of the LED tube lamp **50** to a lamp base (not shown).

The power supply **400** can be a module, e.g., an integrated power module. The power supply **400** may be in the form of a single integrated unit (e.g., with all components of the power supply **400** are within a body) disposed in an end cap **300** at one end of the tube **100**. Alternatively, the power supply **400** may be in form of two separate parts (e.g., with the components of the power supply **400** are separated into two pieces) respectively disposed in two end caps **300**. The power supply **400** further comprises a pair of metal wires **410**. The metal wires **410** extend from the power supply **400** to the inside of the hollow conductive pins **301** and are connected to the hollow conductive pins **301**. In other words, the power supply **400** can be electrically connected to the outer electrical power source through the metal wires **410** and the hollow conductive pins **301**. The hollow conductive pins **301** are disposed outside the end wall **302** and extend along the axial direction of the lateral wall **304**. Referring to FIG. **69**, when the LED tube lamp **50** is installed to a horizontal lamp base (not shown), the axle of the lateral wall **304** is substantially parallel with the horizontal direction "H", and the pair of the hollow conductive pins **301** are at the same altitude and overlap each other in the vertical direction "V". Under the circumstances, the altitude of the opening **320** is higher than that of the axle of the lateral wall **304** in the vertical direction "V".

In the embodiment, as shown in FIG. **69**, the axial direction of the opening **320** is substantially parallel with that of the lateral wall **304**. The axial direction of the opening **320** is defined as an extending direction of the opening **320** extending from the inner surface of the end wall **302** (the surface inside the end cap **300**) to the outer surface of the end wall **302** (the surface outside). In the embodiment, the opening **320** is substantially aligned with the inner surface of the lateral wall **304** (the surface inside the end cap **300**). Specifically, a part of the inner surface of the opening **320** is substantially aligned with a part of the inner surface of the lateral wall **304**.

In the embodiment, as shown in FIG. **69**, an end wall radius "r" is defined as the shortest distance between the center of the end wall **302** (the point of the end wall **302** through which the axle of the lateral wall **304** passes) and the periphery of the end wall **302** in the radial direction of the end cap **300** (the direction substantially parallel with the vertical direction "V" shown in FIG. **69**). A distance "L" is defined as the shortest distance between the center of the end wall **302** and the opening **320** in the radial direction of the end cap **300**. The distance "L" is a ratio from 2/5 to 4/5 of the end wall radius "r". That is to say, the relation of the opening **320** and the end wall **302** matches an equation listed below:

$$0.4r \leq L \leq 0.8r$$

When the position of the opening **320** relative to the center of the end wall **302** matches the aforementioned equation, the convection of air between the LED tube lamp **50** and outside area can be more efficiently.

Referring to FIG. **70**, the difference between the LED tube lamps **50** of FIG. **70** and FIG. **69** is the forms of the openings **320**. In the embodiment, as shown in FIG. **70**, the opening **320** can be inclined. The axial direction of the opening **320** and the axial direction of the lateral wall **304** define an angle θ**1**. The angle θ**1** is an acute angle. The axial direction of the opening **320** is defined as an extending direction of the opening **320** extending from the inner surface of the end wall **302** to the outer surface of the end wall **302**. When the LED tube lamp **50** is installed to the horizontal lamp base, the axial directions of the tube **100** and the end cap **300** are substantially parallel with the horizontal direction "H", and the altitude of the opening **320** is higher than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V". When the power supply **400** generates heat in operation, the inclined opening **320** shown in FIG. **70** is beneficial to the process that heated air rises (along the vertical direction "V") and flows to outside area through the opening **320**.

Additionally, two openings **320** are acceptable. As shown in FIG. **70**, two inclined openings **320** are substantially symmetrical to each other. When the LED tube lamp **50** is installed to the horizontal lamp base, the axial directions of the tube **100** and the end cap **300** are substantially parallel with the horizontal direction "H", and the altitude of one of the two openings **320** is higher than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V" while the other one of the two openings **320** is lower than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V". Each of the axial directions of the two openings **320** and the axial direction of the lateral wall **304** respectively define an acute angle. When the power supply **400** generates heat in operation, the upper opening **320** shown in FIG. **70** is beneficial to the process that heated air rises (along the vertical direction "V") and flows to outside area through the upper opening **320**, and the lower opening **320** shown in FIG. **70** is beneficial to the process that cool air from outside area flow to inside of the end cap **300** through the lower opening **320**. As a result, convection of the heated air and cool air is improved, and, consequently, the effect of heat dissipation is better.

Referring to FIG. **71**, the difference between the LED tube lamps **50** of FIG. **71** and FIG. **69** is the forms of the openings **320**. As shown in FIG. **71**, the opening **320** is not aligned with the inner surface of the lateral wall **304**. Comparing to the opening **320** of FIG. **69**, the opening **320** of FIG. **71** is away from the end wall **302**.

If the opening **320** is too large, dust from outside area may easily pass through the opening **320** and enter the inner space of the end cap **300**. Dust may accumulate on the power supply **400** and negatively affect the effect of heat dissipation. To prevent dust from passing through the opening **320**, the radial area of the opening **320** is preferably less than 1/10 of the radial area of the end wall **302**. Under the circumstances, dust is restricted to pass through the opening **320** to enter the inner space of the end cap **300**. In an example that the LED tube lamp **50** is a T**8** tube lamp of which the external diameter of the tube **100** is 25 mm to 28 mm, and the external diameter of the end cap **300** (i.e., the diameter of the end wall **302** in the vertical direction "V" shown in FIG. **69**) is equal to that of the tube **100**. If the diameter of the end wall **302** in the vertical direction "V" shown in FIG. **69** is 25 mm, the area of the end wall **302** in the vertical direction "V" is 490.625 mm2 (square of the radius of the end wall **302** times 3.14), and the bore area (the radial area) of the opening **320** in the vertical direction "V" is 0.5 mm2 to 6 mm2. For example, the radial area of the opening **320** is 6 mm2 and the radial area of the end wall **302** is 490.625 mm2, the radial area of the opening **320** is about 1/100 of the radial area of the end wall **302**. Under the circumstances, dust is hard to pass through the opening **320** to enter the inner space of the end cap **300**. In different embodiments, the bore area (the radial area) of the opening **320** in the vertical direction "V" is 0.5 mm2 to 3 mm2. Under the circum-

stances, dust is much harder to pass through the opening **320** to enter the inner space of the end cap **300**.

In different embodiments, the end cap **300** further comprises a dust-proof net (not shown). The dust-proof net is a net with fine meshes. The dust-proof net can cover the opening **320**. For example, the dust-proof net can be mounted on the outer surface or the inner surface of the end wall **302** and cover the opening **320**. As a result, the dust-proof net can prevent dust from entering the opening **320** and keep ventilation well.

Referring to FIG. **72**, the difference between the end caps **300** of FIG. **72** and FIG. **68** is the forms of the openings **320**. The opening **320** shown in FIG. **68** is a circular opening. In the embodiment, the opening **320** shown in FIG. **72** is an arc-shaped opening which is long and flat. The opening **320** shown in FIG. **72** includes two opposite long edges **320***l* (arc edges) and two opposite short edges **320***s* between the two long edges **320***l*. The opening **320** has an interval "l" which is the shortest distance between the two long edges **320***l*. Under the circumstances, the interval "l" of the opening **320** is much shorter than the length of the long edge **3201**. Even if the interval "l" of the opening **320** is equal to or slightly less than the diameter (i.e., the bore) of the opening **320** shown in FIG. **68**, the bore area of the opening **320** shown in FIG. **72** is still greater than that of the opening **320** shown in FIG. **68**. As a result, the opening **320** of FIG. **72** can not only prevent most of the dust from passing through but also keep ventilation well. In an embodiment, the distance of the interval "l" of the opening is between 0.5 mm to 1.5 mm, and the length of the long edge **320***l* of the opening is between 1 mm to 7 mm.

In different embodiments, the number, the shape, the position, or the arrangement of the opening(s) **320** can be varied according to different design. Details are described below.

Referring to FIG. **73**, the difference between the end caps **300** of FIG. **73** and FIG. **72** is the amount and forms of the openings **320**. In the embodiment, there are two openings **320** shown in FIG. **73**, and the two openings **320** are substantially symmetrical to each other. The two symmetrical openings **320** shown in FIG. **73** are beneficial to convection of heated air and cool air. The better the convection is, the better the effect of heat dissipation is.

Referring to FIG. **74**, the difference between the end caps **300** of FIG. **74** and FIG. **72** is the amount and forms of the openings **320**. In the embodiment, there are two openings **320** shown in FIG. **74**, and the two openings **320** are adjacent to each other. Under the circumstances that the interval between the two long edges of either opening **320** shown in FIG. **74** is substantially equal to that of the opening **320** shown in FIG. **72**, the sum of the bore areas of the two adjacent openings **320** shown in FIG. **74** is greater than the bore area of the single opening **320** shown in FIG. **72**. The two adjacent openings **320** shown in FIG. **74** are not only beneficial to convection but also beneficial to prevent most of the dust from passing through the opening **320** and entering the end cap **300**.

Referring to FIG. **75**, the difference between the end caps **300** of FIG. **75** and FIG. **74** is the amount and forms of the openings **320**. In the embodiment, there are two set of two openings **320** shown in FIG. **75**, and the two set of two openings **320** are symmetrical to each other. The two set of two openings **320** shown in FIG. **75** are not only beneficial to convection of heated air and cool air but also beneficial to prevent dust from passing through the opening **320** and entering the end cap **300**.

Referring to FIG. **76**, the difference between the end caps **300** of FIG. **76** and FIG. **74** is the forms of the openings **320**. The two short edges opposite to each other of each opening **320** shown in FIG. **9** are round. In the embodiment, the two short edges opposite to each other of each opening **320** shown in FIG. **76** are rectangular. Referring to FIG. **77**, the difference between the end caps **300** of FIG. **77** and FIG. **10** is the forms of the openings **320**. The two short edges opposite to each other of each opening **320** shown in FIG. **10** are round. In the embodiment, the two short edges opposite to each other of each opening **320** shown in FIG. **77** are rectangular. In different embodiments, the opening **320** can be a long, narrow and straight shaped opening.

Referring to FIG. **78**, the difference between the end caps **300** of FIG. **78** and FIG. **3** is the amount and forms of the openings **320**. In the embodiment, the end cap **300** shown in FIG. **78** comprises several openings **320**. The openings **320** are a plurality of circular shaped openings and are asymmetrically arranged on the end wall **302**. Referring to FIG. **3** and FIG. **78**, when the LED tube lamp **50** is installed to the horizontal lamp base, the axial directions of the tube **100** and the end cap **300** are substantially parallel with the horizontal direction "H", and the altitude of at least one of the openings **320** shown in FIG. **78** is higher than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V". In the embodiment, the altitudes of all of the openings **320** shown in FIG. **78** are higher than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V". In different embodiments, the openings **320** symmetrically arranged on the end wall **302** have different shapes, e.g., a long, circular shape. Moreover, at least a part of at least one of the openings **320** is higher than the axle of the tube **100** and the end cap **300** in the vertical direction "V".

Referring to FIG. **79**, the difference between the end caps **300** of FIG. **79** and FIG. **78** is the amount, arrangement, and forms of the openings **320**. In the embodiment, the end cap **300** shown in FIG. **79** comprises several openings **320**, and the openings **320** relative to the axle of the end cap **300** are symmetrical. The openings **320** are arranged on the end wall **302** and are around the axle of the end cap **300** in point symmetry.

Referring to FIG. **80**, the differences between the LED tube lamps **50** of FIG. **80** and FIG. **4** are the forms of the power supply **400** and the opening **320**. The power supply **400** shown in FIG. **80** comprises a printed circuit board **420** and one or more electronic components **430**. The printed circuit board **420** comprises a first surface **421** and a second surface **422** opposite to and substantially parallel with each other. The first surface **421** and the second surface **422** of the printed circuit board **420** are perpendicular to the axial direction of the lateral wall **304**. The second surface **422** of the printed circuit board **420** relative to the first surface **421** is closer to the end wall **302** of the end cap **300** which at least part of the power supply **400** is inside. The electronic components **430** are disposed on the first surface **421** of the printed circuit board **420**. The electronic components **430** can be, for example, capacitors.

In the embodiment, as shown in FIG. **80**, the second surface **422** of the printed circuit board **420** contacts the inner surface of the end wall **302**. Moreover, the metal wires **410** (not shown in FIG. **80**) of the power supply **400** can be directly inserted in the hollow conductive pins **301** from the printed circuit board **420**. Alternatively, the hollow conductive pins **301** can be directly contacted by a pair of corresponding contacts (not shown) on the second surface **422** of the printed circuit board **420**. In addition, the freely extending end portion **210** is connected to the first surface **421** of

the printed circuit board **420**. In different embodiments, the second surface **422** of the printed circuit board **420** does not contact the inner surface of the end wall **302** and instead the second surface **422** of the printed circuit board **420** is spaced from the inner surface of the end wall **302** by a predetermined interval. The interval between the printed circuit board **420** and the end wall **302** is beneficial to convection of air. In addition, the freely extending end portion **210** is connected to the second surface **422** of the printed circuit board **420** (not shown).

In the embodiment, as shown in FIG. **80**, the second surface **422** of the printed circuit board **420** fully contacts the inner surface of the end wall **302** and covers the opening **320**; therefore, heat generated by the printed circuit board **420** can be directly transferred to cool air outside the end cap **300** through the opening **320** and, consequently, the effect of heat dissipation is well. Furthermore, under the circumstances that the second surface **422** of the printed circuit board **420** fully covers the opening **320**, dust is blocked by the printed circuit board **420** so that dust won't pass through the opening **320** to enter the inner space of the end cap **300**. Thus, the bore area of the opening **320** shown in FIG. **80** can be greater than that of the opening **320** shown in FIG. **4**.

In different embodiments, the second surface **422** of the printed circuit board **420** contacts the inner surface of the end wall **302** while the end cap **300** has no opening **320**. In the situation, the end wall **302** can comprise a material with high thermal conductivity. The end wall **302**, for example, can be made by composite materials. The part of the end wall **320** which is connected to the hollow conductive pins **301** is made by an insulating material, and the other part of the end wall **320** is made by aluminum. Heat generated by the printed circuit board **420** can be directly transferred to the part of aluminum of the end wall **302** and then can be transferred to cool air outside the end cap **300** through the part of Aluminum; therefore, the effect of heat dissipation is well. In different embodiments, the opening **320** can be disposed on the lateral wall **304** such that when the LED tube lamp **50** is installed to the horizontal lamp base, the altitude of the opening **320** on the lateral wall **304** is higher than that of the axle of the tube **100** and the end cap **300** in the vertical direction "V".

Referring to FIG. **81**, the difference between the LED tube lamps **50** of FIG. **81** and FIG. **80** is that the power supply **400** shown in FIG. **81** further comprises a heat-dissipating element or a driving module **440**. The heat-dissipating element or driving module **440** is disposed on the second surface **422** of the printed circuit board **420** and extends into the opening **320**. In an embodiment, the heat-dissipating element **440***a* is a metal heat pipe or a metal fin. Heat generated by electronic components **430** on the printed circuit board **420** can be transferred to the heat-dissipating element **440***a* and then can be transferred to cool air outside the end cap **300** through the heat-dissipating element **440***a*; therefore, the effect of heat dissipation is well. Since the driving module **440***b* is a main heat source among the electronic components of the power supply **400**, the idea of separation of the general electronic components **430** (the general electronic components **430** generating less heat than the driving module **440***b*) and the driving module **440***b* is beneficial to improve the effect of heat dissipation. For example, the general electronic components **430** are disposed on the first surface **421** of the printed circuit board **420** and the driving module **440***b* generating significant heat is disposed on the second surface **422** of the printed circuit board **420** and locates adjacently to the at least one opening **320**. The heat-dissipating element or driving module **440** can be disposed in the opening **320** such that the heat generated by the driving module **440***b* or the heat of heat-dissipating element can be directly transferred to cool air outside the end cap **300**; therefore, the effect of heat dissipation is improved. The driving module **440***b* comprises one or more specific electronic components generating significant heat including an inductor, a transistor, or an integrated circuit. The arrangement of having the inductor, the transistor, or the integrated circuit positioned in the opening **320** is beneficial to improve the effect of heat dissipation.

In different embodiments, several heat-dissipating elements or driving modules **440** of the power supply **400** can be respectively disposed in several openings **320**. For example, the inductor, the transistor, and the integrated circuit can be respectively disposed in different openings **320**. Alternatively, the heat-dissipating element, the inductor, the transistor, and the integrated circuit can be respectively disposed in different openings **320**.

Referring to FIG. **81** and FIG. **82**, the difference between FIG. **81** and FIG. **82** is whether the heat-dissipating element or driving module **440** and the opening **320** are sealed in the radial direction of the opening **320**. The heat-dissipating element or driving module **440** (the heat-dissipating element **440***a* in the example) and the opening **320** shown in FIG. **81** are sealed, which means that the shape and the size of the cross section of the heat-dissipating element or driving module **440** in the radial direction exactly match the shape and the size of the bore of the opening **320** in the radial direction. In one embodiment, at least one component of the heat-dissipating element or the driving module **440** and the at least one opening **320** are substantially sealed in the radial direction of the at least one opening. Instead, there is a gap "G" between the heat-dissipating element or driving module **440** (the driving module **440***b* in the example) and the opening **320** in the radial direction shown in FIG. **82**. Thus the outside air can freely flow through the gap "G" to enter the end cap **300** while the heat-dissipating element or driving module **440** is in the opening **320**. The effect that the heat-dissipating element or driving module **440** and the opening **320** are sealed in the radial direction is not the same as the effect of air tight. There may be small gaps hard to be seen by eyes but still exist between the heat-dissipating element or driving module **440** and the opening **320** shown in FIG. **81**. However, the small gaps between the heat-dissipating element or driving module **440** and the opening **320** shown in FIG. **81** is much smaller than the gap "G" shown in FIG. **82** and, consequently, the heat-dissipating element or driving module **440** and the opening **320** shown in FIG. **81** block cool air outside the opening **320** to a great extent.

Referring to FIG. **83**, the differences between the LED tube lamps **50** of FIG. **83** and FIG. **4** are the forms of the power supply **400**. The power supply **400** shown in FIG. **83** comprises a printed circuit board **420**, one or more electronic components **430**, and a heat-dissipating element or driving module **440**. The printed circuit board **420** comprises a first surface **421** and a second surface **422** opposite to and substantially parallel with each other. The first surface **421** and the second surface **422** of the printed circuit board **420** are substantially parallel with the axial direction of the lateral wall **304**. The electronic components **430** and the heat-dissipating element or driving module **440** (the driving module **440***b* in the example) are all disposed on the first surface **421** of the printed circuit board **420**. The heat-dissipating element or driving module **440** relative to the electronic components **430** is closer to the opening **320**. In an embodiment, the heat-dissipating element **440***a* is a metal

heat pipe or a metal fin. Heat generated by the printed circuit board **420** can be transferred to the heat-dissipating element **440***a*. Since the heat-dissipating element **440***a* relative to the electronic components **430** is closer to the opening **320**, it is beneficial to heat exchange between the heat-dissipating element **440***a* and outside cool air, and, consequently, the effect of heat dissipation is better. In an embodiment, the driving module **440***b* relative to the electronic components **430** (the general electronic components generating less heat than the driving module **440***b*) is closer to the opening **320**, which is beneficial to heat exchange between the driving module **440***b* and outside cool air. Thus the effect of heat dissipation is better. The driving module **440***b* comprises one or more specific electronic components generating significant heat. The specific electronic components includes an inductor, a transistor, or an integrated circuit. The arrangement that the inductor, the transistor, or the integrated circuit relative to the general electronic components **430** is closer to the opening **320** is beneficial to improve the effect of heat dissipation.

Referring to FIG. **84**, FIG. **84** is a part of a cross section of the LED tube lamp **50** installed to a lamp base **1060**. The LED tube lamp **50** shown in FIG. **84** comprises a coupling structure. A part of the coupling structure is disposed on the rear end region **101** of the tube **100**, and the other part of the coupling structure is disposed on the end cap **300**. The tube **100** and the end cap **300** can be connected to each other by the coupling structure. The coupling structure comprises a first thread **3001** disposed on the lateral wall **304** and a second thread **1001** disposed on the rear end region **101** of the tube **100**. The first thread **3001** is on the inner surface of the lateral wall **304** and is at an end of the lateral wall **304** away from the end wall **302**. The second thread **1001** is on the outer surface of the rear end region **101** of the tube **100** and is close to the open end of the tube **100** (i.e., the two opposite ends of the tube **100**). The first thread **3001** is corresponding to the second thread **1001**. The end cap **300** can be connected to the tube **100** by relative rotation of the first thread **3001** and the second thread **1001**. Based on the coupling structure, the end cap **300** can be easily assembled to the tube **100** or disassembled from the tube **100**.

As shown in FIG. **84**, in the embodiment, when the relative rotation of the first thread **3001** and the second thread **1001** is done and the first thread **3001** fully matches the second thread **1001** (i.e., the end cap **300** is properly assembled to the tube **100**), the opening **320** is rotated about the axle of the tube **100** to a predetermined position. Specifically, while the lamp base **1060** is horizontal or substantially horizontal and the LED tube lamp **50** is horizontally installed to the lamp base **1060**, the axial directions of the tube **100** and the end cap **300** are substantially parallel with the horizontal direction "H", and the predetermined position means that the altitude of the opening **320** is higher than that of the axle of the lateral wall **302** in the vertical direction "V" in the configuration.

As shown in FIG. **84**, in the embodiment, the coupling structure further comprises a first positioning unit **3002** disposed on the lateral wall **304** and a second positioning unit **1002** disposed on the rear end region **101** of the tube **100**. The first positioning unit **3002** is corresponding to the second positioning unit **1002**. When the relative rotation of the first thread **3001** and the second thread **1001** is done and the first thread **3001** fully matches the second thread **1001**, the first positioning unit **3002** mates the second positioning unit **1002**, such that the tube **100** and the end cap **300** are positioned to each other. In the embodiment, the first positioning unit **3002** is a concave point on the inner surface of the lateral wall **304**, and the second positioning unit **1002** is a convex point on the outer surface of the rear end region **101** of the tube **100**. When the first thread **3001** fully matches the second thread **1001**, the convex point of the second positioning unit **1002** falls in the concave point of the first positioning unit **3002** to assist the fixation of the LED tube lamp **50** and to inform people assembling the LED tube lamp **50** that the end cap **300** has been properly assembled to the tube **100**. More particularly, when the first positioning unit **3002** and the second positioning unit **1002** are coupled to each other along with slightly sound and vibration, people assembling the LED tube lamp **50** can be informed by hearing the sound or feeling the vibration and can immediately realize that the end cap **300** has been properly assembled to the tube **100**. In the assembling process of the LED tube lamp **50**, operator, based on the sound and the vibration generated by the mating (coupling) of the first positioning unit **3002** and the second positioning unit **1002**, can finish the assembling process of an assembled LED tube lamp **50** in time. Thus the efficiency of assembling can be improved.

In different embodiments, the first positioning unit **3002** can be a convex point, and the second positioning unit **1002** can be a concave point. In different embodiments, the first positioning unit **3002** and the second positioning unit **1002** can respectively be disposed on different positions of the end cap **300** and the rear end region **101** of the tube **100** on the premise that the first positioning unit **3002** mates the second positioning unit **1002** only when the end cap **300** is properly assembled to the tube **100**.

As shown in FIG. **84**, the method of having the LED tube lamp **50** installed to the lamp base **1060** is: plugging the hollow conductive pins **301** of the end cap **300** into the conductive sockets **61** of the lamp base **1060**, and rotating the LED tube lamp **50** about the axle of the tube **100** and the end cap **300** until the hollow conductive pins **301** in the conductive sockets **61** are rotated to a predetermined position. The assembling is done when the hollow conductive pins **301** in the conductive sockets **61** are in the predetermined position.

In the embodiment, torque applied to the tube **100** and the end cap **300** to have the first thread **3001** and the second thread **1001** relatively rotated until the first thread **3001** fully matches the second thread **1001** is greater than that applied to the LED tube lamp **50** to have the LED tube lamp **50** installed to the lamp base **1060** (i.e., torque for rotating the hollow conductive pins **301** in the conductive sockets **61**). In other words, friction force between the first thread **3001** and the second thread **1001** of the assembled LED tube lamp **50** is greater than that between the hollow conductive pins **301** and the conductive sockets **61** when the LED tube lamp **50** is installed to the lamp base **1060**. In an embodiment, the friction force between the first thread **3001** and the second thread **1001** is at least twice greater than that between the hollow conductive pins **301** and the conductive sockets **61**. When the installed LED tube lamp **50** is going to be uninstalled from the lamp base **1060**, the hollow conductive pins **301** in the conductive sockets **61** have to be reversely rotated to a predetermined position in advance, and then the LED tube lamp **50** can be unplugged from the lamp base **1060** (i.e., the hollow conductive pins **301** can be unplugged from the conductive sockets **61**). Since the friction force between the first thread **3001** and the second thread **1001** is greater than that between the hollow conductive pins **301** and the conductive sockets **61**, the relative position of the first thread **3001** and the second thread **1001** remains still during the reverse rotation of the hollow conductive pins

301 in the conductive sockets 61. As a result, the end cap 300 won't accidentally loose from the tube 100 during the process of uninstalling the LED tube lamp 50 from the lamp base 1060.

Referring to FIG. 85, FIG. 85 is a part of a cross section of the LED tube lamp 50 installed to the lamp base 1060, the difference between the LED tube lamps 50 of the FIG. 85 and FIG. 84 is with respect to the coupling structures. As shown in FIG. 85, the coupling structure comprises an annular convex portion 3003 disposed on the lateral wall 304 and an annular trough 1003 disposed on the rear end region 101 of the tube 100. The annular convex portion 3003 is on the inner surface of the lateral wall 304 and is at an end of the lateral wall 304 away from the end wall 302. The annular trough 1003 is on the outer surface of the rear end region 101 of the tube 100. The annular convex portion 3003 is corresponding to the annular trough 1003. The end cap 300 can be connected to the tube 100 by the coupling of the annular convex portion 3003 and the annular trough 1003. The annular convex portion 3003 and the annular trough 1003 are rotatably connected to each other. More particularly, the annular convex portion 3003 is capable of sliding along the annular trough 1003, and, consequently, the tube 100 and the end cap 300 have a degree of freedom capable of rotating relative to each other about the axle of the tube 100 and the end cap 300 by the annular convex portion 3003 and the annular trough 1003.

As shown in FIG. 85, in the embodiment, the coupling structure further comprises a first positioning unit 3002 disposed on the lateral wall 304 and a second positioning unit 1002 disposed on the rear end region 101 of the tube 100. The structure and the function of the first positioning unit 3002 and the second positioning unit 1002 are described above and there is no need to repeat. Although the tube 100 and the end cap 300 are rotatably connected to each other by the coupling of the annular convex portion 3003 and the annular trough 1003, the first positioning unit 3002 mates the second positioning unit 1002 (e.g., the concave point of the first positioning unit 3002 and the convex point of the second positioning unit 1002 are coupled to each other) when the tube 100 and the end cap 300 are rotated relative to each other to a predetermined position to assist the positioning in the assembling process of the tube 100 and the end cap 300 and to enhance the fixation of the tube 100 and the end cap 300. Based on the coupling structure, the end cap 300 can be easily assembled to the tube 100 or disassembled from the tube 100.

As shown in FIG. 85, in the embodiment, the rear end regions 101 of the tube 100 utilized for being connected to the end cap 300 is shrunk in the radial direction. The extent that the rear end regions 101 shrunk (i.e., difference between the main body region 102 and the rear end regions 101 in radial direction) is equivalent to the thickness of the lateral wall 304 of the end cap 300. Thus the outer surface of the lateral wall 304 of the end cap 300 is aligned with the outer surface of the main body region 102 of the tube 100 while the end cap 300 and the tube 100 are connected to each other.

In different embodiments, the annular trough 1003 can be disposed on the lateral wall 304, and the annular convex portion 3003 can be disposed on the rear end region 101 of the tube 100. Additionally, the coupling structure can further comprise a hot melt adhesive. The hot melt adhesive can be disposed in the joint of the tube 100 and the end cap 300 (e.g., between the rear end region 101 and the lateral wall 304). When assembling the tube 100 and the end cap 300, the end cap 300 can be assembled to the tube 100 via the coupling structure in advance, and the hot melt adhesive is in liquid state in the assembling process. After heating up the hot melt adhesive, and upon expansion due to heat absorption, the hot melt adhesive flows, and then solidifies upon cooling, thereby bonding together the end cap 300 to the tube 100 (not shown). The volume of the hot melt adhesive may expand to about 1.3 times the original size when heated from room temperature (e.g., between about 15 and 30 degrees Celsius) to about 200 to 250 degrees Celsius. The end cap 300 and the end of the tube 100 could be secured by using the hot melt adhesive and therefore qualified in a torque test of about 1.5 to about 5 newton-meters (Nt-m) and/or in a bending test of about 5 to about 10 newton-meters (Nt-m). During the heating and solidification of the hot melt adhesive, the heat and pressure inside the end cap increase and are then released through the at least one opening 320 on the end cap 300. After the hot melt adhesive hardens, the end cap 300 can be firmly fixed to the tube 100. Under the circumstances, the end cap 300 and the tube 100 is hard to disassemble unless the hardened hot melt adhesive returns to liquid state by certain process. The design of the LED tube lamp 50 is to take into account both the convenience regarding the assembling process of the LED tube lamp 50 and the robustness regarding the assembled LED tube lamp 50.

Referring to FIG. 86, FIG. 86 is a perspective view of the LED tube lamp 50 installed to an inclined lamp base 1060. In different embodiments, the LED tube lamp 50 can be installed to an inclined or a vertical lamp base 1060 in an inclined or vertical pose. In the embodiment, as shown in FIG. 86, the lamp base 1060 is inclined. Thus the axle of the LED tube lamp 50 and the horizontal direction "H" define an acute angle while the LED tube lamp 50 is installed to the lamp base 1060. Under the circumstances that the LED tube lamp 50 installed to the lamp base 1060 is inclined, the altitude of the opening 320 of the end cap 300 is still higher than that of the axle of the LED tube lamp 50 in the vertical direction "V", which is beneficial to improve the effect of heat dissipation.

Referring to FIGS. 87, 88 and 89, FIG. 87 is a partial view of the LED tube lamp 50, FIG. 88 is a cross section of FIG. 87 along the line B-B', and FIG. 89 is a partially cross section of FIG. 87. Wherein a part of components of the end cap 300 is not shown in FIG. 89. The difference between the end cap 300 of FIGS. 87 to 89 and the end cap 300 of FIG. 68 is the forms of the openings 320. Additionally, the end cap 300 of FIGS. 87 to 89 further comprises two vertical ribs 330, and the vertical ribs 330 are utilized for fixation of the printed circuit board 420 of the power supply 400. Thus the relative position between the printed circuit board 420 of the power supply 400 and the end cap 300 of FIGS. 87 to 89 can be varied based on the shape of the vertical ribs 300.

As shown in FIG. 87, in the embodiment, the opening 320 has a bow-shaped opening. The size and the position of the opening 320 are corresponding to the two vertical ribs 330. That is to say, the two vertical ribs can be seen from outside the opening 320 in the viewing angle which is substantially parallel with and is along the axial direction of the end cap 300. Furthermore, the two vertical ribs 330 are disposed on the inner surface of the lateral wall 304, and the two vertical ribs are spaced from each other and extend along the axial direction of the lateral wall 304. The vertical ribs 330 are perpendicular to a plane at which the printed circuit board 420 of the power supply 400 is located. In other words, the two vertical ribs 330 are perpendicular to a side of the printed circuit board 420 of the power supply 400 in the radial direction of the end cap 300. For illustration, as shown in FIG. 88, when the LED tube lamp 50 is horizontally

installed, the axial directions of the end cap **300** is substantially parallel with the horizontal direction "H", and the vertical ribs **300** extend from the inner surface of the lateral wall **304** along the vertical direction "V" and is connected to the printed circuit board **420** of the power supply **400**.

As shown in FIG. **88** and FIG. **89**, the vertical rib **330** comprises a first side **331**, a second side **332**, and a third side **333**. The first side **331** and the second side **332** are opposite to each other. The second side **332** relative to the first side **331** is closer to the opening **320**. The third side **333** is away from the lateral wall **304** and is between the first side **331** and the second side **332**. The third side **333** is connected to the printed circuit board **420** of the power supply **400**. The third side **333** is, but is not limited to, adhered to or coupled to the printed circuit board **420** of the power supply **400**.

In the embodiment, as shown in FIGS. **87** to **89**, the shortest distance between the third side **333** of the vertical rib **330** and the lateral wall **304** gradually decreases along the axial direction of the lateral wall **304** towards the end wall **302**. For illustration, as shown in FIG. **88**, the height of any point of the vertical rib **330** along the horizontal direction "H" relative to the lateral wall **304** in the vertical direction "V" is the shortest distance between the third side **333** of the vertical rib **330** and the lateral wall **304**. The height of the vertical rib **330** gradually decreases along the axial direction of the lateral wall **304** towards the end wall **302**. That is to say, the height of the vertical rib **330** relative to the lateral wall **304** gradually decreases from the first side **331** to the second side **332**. Thus an extending direction of the third side **333** and the axial direction of the end cap **300** define an acute angle, and, consequently, the printed circuit board **420** of the power supply **400** connected to the third side **333** is inclined. For illustration, as shown in FIG. **88**, the altitude of one side of the printed circuit board **420** of the power supply **400** close to the end wall **302** is different from that of the other side of the printed circuit board **420** of the power supply **400** away from the end wall **302** in the vertical direction "V". The altitude of the side of the printed circuit board **420** of the power supply **400** close to the end wall **302** is higher than that of the other side of the printed circuit board **420** of the power supply **400** away from the end wall **302**. The side of the printed circuit board **420** of the power supply **400** close to the end wall **302** relative to the other side of the printed circuit board **420** of the power supply **400** is closer to the opening **320**. Under the circumstances, heated air generated by the power supply **400** can rise along the inclined power supply **400** and flow through the opening **320** to outside area of the end cap **300**, which is beneficial to improve the effect of heat dissipation.

Referring to FIG. **90**, the difference between the end cap **300** of FIG. **90** and the end cap **300** of FIGS. **87** to **89** is the forms of the vertical ribs **330**. The shortest distance between the third side **333** of the vertical rib **330** shown in FIG. **90** and the lateral wall **304** gradually increases along the axial direction of the lateral wall **304** towards the end wall **302**. That is to say, the height of the vertical rib **330** relative to the lateral wall **304** gradually increases from the first side **331** to the second side **332**. Under the circumstances, the altitude of one side of the printed circuit board **420** of the power supply **400** connected to the third side **333** of the vertical rib **330** close to the end wall **302** is lower than that of the other side of the printed circuit board **420** of the power supply **400** away from the end wall **302**. The configuration of the vertical ribs **330** and the printed circuit board **420** of the power supply **400** shown in FIG. **90** is beneficial to convection of inside heated air and outside cool air since outside cool air can easily enter the inner space of the end cap **300**.

Referring to FIG. **91**, the difference between the end cap **300** of FIG. **91** and the end cap **300** of FIGS. **87** to **89** is the forms of the vertical ribs **330**. In addition, the power supply **400** shown in FIG. **91** further comprises a printed circuit board **420**. In different embodiments, the power supply **400** can further comprise a power module disposed on the printed circuit board **420** or can further comprise one or more electronic components **430** and one or more heat-dissipating elements or driving modules **440** disposed on the printed circuit board **420**. In different embodiments, the power supply **400** can be a module, e.g., an integrated power module integrated with the printed circuit board **420** and electronic components.

As shown in FIG. **91**, in the embodiment, the power supply **400** further comprises electronic components **430** and a heat-dissipating element or driving module **440** disposed on the printed circuit board **420**. Specifically, the printed circuit board **420** comprises a first surface **421** and a second surface **422** opposite to each other. The electronic components **430** and the heat-dissipating element or driving module **440** are disposed on the first surface **421**. The second surface **422** is connected to the third sides **333** of the vertical ribs **330**. In the embodiment, the height of the vertical rib **330** relative to the lateral wall **304** from the first side **331** to the second side **332** is identical, and, consequently, the printed circuit board **420** connected to the third side **333** is horizontal but not inclined. The heat-dissipating element or driving module **440** can be a heat-dissipating element, an inductor, a transistor, or an integrated circuit. The heat-dissipating element or driving module **440** relative to the electronic components **430** is closer to the opening **320**. In addition, the second surface **422** of the printed circuit board **420** is spaced from the lateral wall **304** by a certain interval based on the vertical ribs **330**. An extending direction of the vertical rib **330** from the first side **331** to the second side **332** is towards the opening **320**. As a result, there is a space for convection of air between the power supply **400** and the lateral wall **304**, and heated air can easily flow through the opening **320** to outside area of the end cap **300**.

Referring to FIGS. **92** to **94**, FIG. **92** is an end view of the LED tube lamp **50** in which the viewing angle is substantially parallel with the axle of the end cap **300**, FIG. **93** is a radial cross section of the end cap **300** of FIG. **92**, and FIG. **94** is a part of an axial cross section of FIG. **92** along the line C-C'. The difference between the end caps **300** between FIGS. **92** to **94** and FIG. **91** is that the end cap **300** shown in FIGS. **92** to **94** further comprises two horizontal ribs **340**, and the power supply **400** shown in FIGS. **92** to **94** is a power module.

The opening **320** is the bow-shaped opening, as described above. The size and the position of the opening **320** are corresponding to the two vertical ribs **330**. More particularly, a projection of the two vertical ribs **330** is inside a projection of the opening **320** on a plane of projection perpendicular to the axial direction of the end cap **300**. In other words, as shown in FIG. **92**, the two vertical ribs can be seen from outside the opening **320** when seeing into the opening **320** along the axial direction of the end cap **300**. As a result, the space for convection between the two vertical ribs **330** and power supply **400** is corresponding to the opening **320** which is beneficial to improve the effect of heat dissipation.

In the embodiment, as shown in FIGS. **92** to **94**, the two horizontal ribs **340** are disposed on the inner surface of the lateral wall **304**, and the two horizontal ribs **340** are spaced from each other and extend along the axial direction of the lateral wall **304**. Each of the horizontal ribs **340** has a long

and flat shape. The two horizontal ribs **340** are opposite to each other and are symmetric. The two horizontal ribs **340** are respectively corresponding to the two vertical ribs **330**. The printed circuit board **420** of the power supply **400** is sandwiched between the vertical ribs **330** and the horizontal ribs **340**. In other words, one side of the printed circuit board **420** of the power supply **400** is connected to the vertical ribs **330**, and the other side of the printed circuit board **420** of the power supply **400** is connected to the horizontal ribs **340**. The collaboration of the vertical ribs **330** and the horizontal ribs **340** can firmly clamp and fix the printed circuit board **420** of the power supply **400**.

Referring to FIG. **95**, the difference between the end caps **300** of FIG. **95** and FIG. **94** is that the horizontal rib **340** shown in FIG. **94** is a whole piece and instead, the horizontal rib **340** shown in FIG. **95** has a cut portion. More particularly, the horizontal rib **340** shown in FIG. **95** comprises a first rib portion **341**, a second rib portion **342**, and a cut portion **343**. The cut portion **343** is between the first rib portion **341** and the second rib portion **342**. That is to say, the first rib portion **341** and the second rib portion **342** are spaced from each other by the cut portion **343**. The cut portion **343** can be utilized for convection of air and is beneficial to improve the effect of heat dissipation.

In addition, the difference between the end caps **300** of FIG. **95** and FIG. **94** is that the end cap **300** shown in FIG. **95** further comprises a blocking plate **350**. The blocking plate **350** is disposed on the inner surface of the lateral wall **304**. The blocking plate **350** and the end wall **302** are spaced from each other in the axial direction of the lateral wall **304**. A side of the printed circuit board **420** of the power supply **400** facing towards the end wall **302** contacts the blocking plate **350**. The printed circuit board **420** of the power supply **400** is spaced from the end wall **302** by the blocking plate **350** such that there is a gap between the printed circuit board **420** of the power supply **400** and the end wall **302** in the axial direction of the lateral wall **304**. The gap can be utilized for convection of air and is beneficial to improve the effect of heat dissipation.

Referring to FIG. **96**, the difference between the end caps **300** of FIG. **96** and FIG. **94** is that the horizontal rib **340** shown in FIG. **94** is a whole piece and instead, the horizontal rib **340** shown in FIG. **96** comprises one or more through holes. More particularly, each of the horizontal ribs **340** shown in FIG. **96** comprises a plurality of ventilating holes **344**. The ventilating hole **344** penetrates through the horizontal rib **340** and the ventilating holes **344** are arranged on the horizontal rib **340**. The ventilating holes **344** can be utilized for convection of air and is beneficial to improve the effect of heat dissipation.

Referring to FIG. **97**, the difference between the LED tube lamps **50** of FIG. **97** and FIGS. **66** to **69** is with respect to the relationship of the LED light strip **200** and the printed circuit board **420** of the power supply **400**. A plane at which the LED light strip **200** shown in FIGS. **66** to **69** locates is substantially parallel with a plane at which the printed circuit board **420** of the power supply **400** locates. However, a plane at which the LED light strip **200** shown in FIG. **97** locates is not parallel with a plane at which the printed circuit board **420** of the power supply **400** locates. More particularly, as shown in FIG. **97**, the LED light strip **200** locates at a first plane P**1**, and the printed circuit board **420** of the power supply **400** locates at a second plane P**2**. The first plane P**1** and the second plane P**2** are substantially parallel with the axial direction of the tube **100**, and the first plane P**1** and the second plane P**2** define an angle **82** about the axial direction of the tube **100**. The angle **82** is greater than 0 degree and is less than 90 degrees. In other words, comparing to the printed circuit board **420** of the power supply **400** and the LED light strip **200** shown in FIGS. **66** to **69**, the printed circuit board **420** of the power supply **400** shown in FIG. **97** relative to the LED light strip **200** rotates about the axial direction of the tube **100** to the angle **82**. Based on the configuration that the plane at which the LED light strip **200** locates and the plane at which the printed circuit board **420** of the power supply **400** locates are not parallel with each other and instead intersect on a plane of projection along the axial direction of the tube **100**, the heated air heated by the LED light strip **200** and the LED light sources **202** can easily flow through the tube **100** to the end cap **300** so as to further flow through the opening **320** to outside area of the end cap **300**, which is beneficial to improve the effect of heat dissipation.

Referring to FIG. **98**, the difference between the end caps **300** of FIG. **98** and FIGS. **66** to **69** is the forms of the openings **320**. The opening **320** shown in FIG. **98** is, but is not limited to, at the center of the end wall **302**. In the assembling process of the LED tube lamp **50**, two end caps **300** have to be assembled to two ends of the tube **100**. After one of the two end caps **300** is assembled to one end of the tube **100**, it is more difficult to have the other end caps **300** assembled to the other end of the tube **100**. The reason is that if the inner space of the tube **100** and end caps **300** is sealed or is almost sealed, the pressure inside the tube **100** and end caps **300** increases along with compression of gas inside the tube **100** and end caps **300**. More strength is required to assemble the end cap **300** to the tube **100** to against the increased pressure inside the tube **100** and end caps **300**, which leads to difficulty of assembling. The opening **320** shown in FIG. **98** can function as a pressure-releasing tunnel. Under the circumstances, gas inside the tube **100** and end caps **300** can be released through the opening **320** during the process of assembling the last one of the two end caps **300** to the tube **100**, such that the pressure inside the tube **100** and end caps **300** can be constant. It is beneficial to the assembling process of the LED tube lamp **50** and to improve the efficiency of assembling. On the other hand, if there is no opening on the end caps **300**, the pressure inside the tube **100** and the end caps **300** of the LED tube lamp **50** may become negative pressure resulting from the lowering of the temperature inside the tube **100** and the end caps **300**. The opening **320** functioning as the pressure-releasing tunnel also allows the outside gas capable of flowing into the tube **100** and the end caps **300** such that the pressure inside the tube **100** and the end caps **300** can remain constant (equal to the pressure outside the tube **100** and the end caps **300**); therefore, during a disassembling process of the LED tube lamp **50**, the end cap **300** is easily to be disassembled from the tube **100**.

In addition, when the LED tube lamp **50** operates, the electronic components of the LED tube lamp **50** keep generating heat such that the temperature inside the LED tube lamp **50** increases. According to the equation of state of a hypothetical ideal gas, the result of multiplication of pressure and volume of gas inside the LED tube lamp **50** increases along with the increase of the temperature. If gas is sealed in the tube **100** and the end caps **300**, the volume of the gas is constant. Thus the pressure increases along with the increase of the temperature. Under the circumstances, when the LED tube lamp **50** continuously operates, the electronic components continuously suffer high temperature and high pressure and, consequently, are easily damaged. The opening **320** shown in FIG. **98** can function as a pressure-releasing tunnel. In other words, the expanding gas

can be released from the opening **320** when the temperature of the gas inside the LED tube lamp **50** increases, which is beneficial to decrease the pressure inside the LED tube lamp **50**.

Referring to FIG. **99**, FIG. **99** is a part of a cross section of FIG. **98** along the line D-D'. The difference between FIG. **99** and FIG. **98** is that the LED tube lamp **50** shown in FIG. **99** further comprises a light sensor **450** and a circuit safety switch (not shown). In the embodiment, the light sensor **450** and the circuit safety switch are, but are not limited to, disposed on the printed circuit board **420** of the power supply **400** and are electrically connected to the printed circuit board **420** of the power supply **400**. Moreover, the power supply **400** can comprise a built-in electricity source. For example, the power supply **400** can comprise a mini battery; therefore, the power supply **400** can be supplied by the mini battery so as to supply the operation of the light sensor **450** and the circuit safety switch before the LED tube lamp **50** is installed to a lamp base. The circuit safety switch is integrated in the power supply **400**. The light sensor **450** is positioned corresponding to the opening **320**, and the light sensor **450** is collimated with the opening **320**. In different embodiments, the light sensor **450** does not extend into the opening **320**. Alternatively, the light sensor **450** can extend into the opening **320**. The light sensor **450** can sense light inside the opening **320** or ambient light outside the opening **320** but near the end wall **302**. Furthermore, the light sensor **450** can generate sensing signals according to the intensity of the sensed light (e.g., brightness). The sensing signals are transmitted to the circuit safety switch. The circuit safety switch determines whether to close or to open the circuit of the power supply **400** based on the received sensing signals.

How the light sensor **450** and the circuit safety switch work are described below and the description is merely an example but not a limitation. When the brightness sensed by either one of the light sensors **450** of the end caps **300** is greater than a predetermined threshold, the circuit safety switch opens the circuit of the power supply **400**. When the brightness sensed by both of the light sensors **450** of the end caps **300** are less than the predetermined threshold, the circuit safety switch closes the circuit of the power supply **400**.

For instance, when a user holds the LED tube lamp **50** and is going to install the LED tube lamp **50** to the lamp base **1060** (referring to FIGS. **84** to **86**), the end caps **300** at two ends of the LED tube lamp **50** are exposed to the environment and do not obstructed by anything such that the brightness sensed by both of the light sensors **450** of the end caps **300** are greater than the predetermined threshold, the circuit safety switch opens the circuit of the power supply **400**. Next, when the user has the hollow conductive pins **301** of the end cap **300** of one end of the LED tube lamp **50** plugged into the conductive sockets **61** of one end of the lamp base **1060**, the light sensor **450** in the end cap **300** having been plugged into one end of the lamp base **1060** is obstructed by the lamp base **1060**, and, consequently, brightness sensed by the light sensor **450** is less than the predetermined threshold. However, brightness sensed by the light sensor **450** in the other end cap **300** which is not yet plugged into the conductive sockets **1061** is still greater than the predetermined threshold. In the situation, the circuit safety switch still has the circuit of the power supply **400** remain open. Thus there is no risk of electric shock to the user. Finally, when the user properly install the LED tube lamp **50** to the lamp base **60**, both of the end caps **300** at two ends of the LED tube lamp **50** are obstructed by the lamp base **60**, and brightness sensed by both of the light sensors **450** of the two end caps **300** are less than the predetermined threshold. Under the circumstances that brightness sensed by both of the light sensors **450** of the two end caps **300** are less than the predetermined threshold, the circuit safety switch closes the circuit of the power supply **400**, and the power supply **400** of which the circuit is closed can received electricity from the lamp base **60** and can supply the LED light strip **200** and the LED light source **202**.

According to the light sensors **450** and the circuit safety switches of the LED tube lamp **50** shown in FIG. **99**, under the circumstances that the hollow conductive pins **301** of the end cap **300** of one end of the LED tube lamp **50** is plugged into the conductive sockets **61** of one end of the lamp base **60** and the hollow conductive pins **301** of the end cap **300** of the other end of the LED tube lamp **50** is still exposed to environment, the circuit safety switches automatically open the circuits of the power supply **400** (or have the circuits of the power supply **400** remain open). Thus the user has no risk of electric shock even if the exposed hollow conductive pins **301** are contacted by the user. As a result, safety regarding the use of the LED tube lamp **50** can be ensured.

Referring to FIG. **100** to FIG. **103**, FIG. **100** is a perspective view of a LED light strip **200**, e.g., a bendable circuit sheet, and a printed circuit board **420** of a power supply **400** soldered to each other and FIG. **101** to FIG. **103** are diagrams of a soldering process of the LED light strip **200** and the printed circuit board **420** of the power supply **400**. In the embodiment, the LED light strip **200** and the freely extending end portions **210** have the same structure. The freely extending end portions **210** are the portions of two opposite ends of the LED light strip **200** and are utilized for being connected to the printed circuit board **420**. The LED light strip **200** and the power supply **400** are electrically connected to each other by soldering. Two opposite ends of the LED light strip **200** are utilized for being respectively soldered to the printed circuit board **420** of the power supply **400**. In other embodiments, only one end of the LED light strip **200** is soldered to the power supply **400**. The LED light strip **200** is, but not limited to, a bendable circuit sheet, and the LED light strip **200** comprises a circuit layer **200***a* and a circuit protecting layer **200***c* over a side of the circuit layer **200***a*.

In one embodiment, the LED light strip **200** includes a bendable circuit sheet having a conductive wiring layer and a dielectric layer that are arranged in a stacked manner, wherein the wiring layer and the dielectric layer have same areas (not shown) or the wiring layer has less area than the dielectric layer. The LED light source **202** is disposed on one surface of the wiring layer, the dielectric layer is disposed on the other surface of the wiring layer that is away from the LED light sources **202**. The wiring layer is electrically connected to the power supply **400** to carry direct current (DC) signals. Meanwhile, the surface of the dielectric layer away from the wiring layer is fixed to the inner circumferential surface of the tube **100** by means of a adhesive sheet (not shown). The wiring layer can be a metal layer or a power supply layer including wires such as copper wires.

In another embodiment, the outer surface of the wiring layer or the dielectric layer may be covered with a circuit protective layer made of an ink with function of resisting soldering and increasing reflectivity (not shown). Alternatively, the dielectric layer can be omitted and the wiring layer can be directly bonded to the inner circumferential surface of the tube **100**, and the outer surface of the wiring layer is coated with the circuit protective layer. Whether the wiring layer has a one-layered, or two-layered structure, the circuit protective layer can be adopted. In some embodi-

ments, the circuit protective layer is disposed only on one side/surface of the LED light strip **200**, such as the surface having the LED light source **202**. In some embodiments, the bendable circuit sheet is a one-layered structure made of just one wiring layer, or a two-layered structure made of one wiring layer and one dielectric layer, and thus is more bendable or flexible to curl when compared with the conventional three-layered flexible substrate (one dielectric layer sandwiched with two wiring layers). As a result, the bendable circuit sheet of the LED light strip **200** can be installed in a tube with a customized shape or non-tubular shape, and fitly mounted to the inner surface of the tube **100**. The bendable circuit sheet closely mounted to the inner surface of the tube **100** is preferable in some cases. In addition, using fewer layers of the bendable circuit sheet improves the heat dissipation and lowers the material cost.

Nevertheless, the bendable circuit sheet is not limited to being one-layered or two-layered; in other embodiments, the bendable circuit sheet may include multiple layers of the wiring layers and multiple layers of the dielectric layers, in which the dielectric layers and the wiring layers are sequentially stacked in a staggered manner, respectively (not shown). These stacked layers are away from the surface of the outermost wiring layer which has the LED light source **202** disposed thereon and is electrically connected to the power supply **400**. Moreover, the length of the bendable circuit sheet is greater than the length of the tube **100**.

In one embodiment, the LED light strip **200** includes a bendable circuit sheet having in sequence a first wiring layer, a dielectric layer, and a second wiring layer. The thickness of the second wiring layer is greater than that of the first wiring layer, and the length of the LED light strip **200** is greater than that of the tube **100**. The end region of the light strip **200** extending beyond the end portion of the tube **100** without disposition of the light source **202** is formed with two separate through holes to respectively electrically communicate the first wiring layer and the second wiring layer. The two separate through holes are not communicated to each other to avoid short.

In this way, the greater thickness of the second wiring layer allows the second wiring layer to support the first wiring layer and the dielectric layer, and meanwhile allow the LED light strip **200** to be mounted onto the inner circumferential surface without being liable to shift or deform, and thus the yield rate of product can be improved. In addition, the first wiring layer and the second wiring layer are in electrical communication such that the circuit layout of the first wiring later can be extended downward to the second wiring layer to reach the circuit layout of the entire LED light strip **200**. Moreover, since the land for the circuit layout becomes two-layered, the area of each single layer and therefore the width of the LED light strip **200** can be reduced such that more LED light strips **200** can be put on a production line to increase productivity. Furthermore, the first wiring layer and the second wiring layer of the end region of the LED light strip **200** that extends beyond the end portion of the tube **100** without disposition of the light source **202** can be used to accomplish the circuit layout of a power supply **400** so that the power supply **400** can be directly disposed on the bendable circuit sheet of the LED light strip **200**.

Moreover, the LED light strip **200** comprises two opposite surfaces which are a first surface **2001** and a second surface **2002**. The first surface **2001** is the one on the circuit layer **200***a* and away from the circuit protecting layer **200***c*. The second surface **2002** is the other one on the circuit protecting layer **200***c* and away from the circuit layer **200***a*. Several LED light sources **202** are disposed on the first surface **2001** and are electrically connected to circuits of the circuit layer **200***a*. The circuit protecting layer **200***c* has less electrical and thermal conductivity but being beneficial to protect the circuits. The first surface **2001** of the LED light strip **200** comprises soldering pads "b". Soldering material "g" can be placed on the soldering pads "b". In the embodiment, the LED light strip **200** further comprises a notch "f". The notch "f" is disposed on an edge of the end of the LED light strip **200** soldered to the printed circuit board **420** of the power supply **400**. The printed circuit board **420** comprises a power circuit layer **420***a* and soldering pads "a". Moreover, the printed circuit board **420** comprises two opposite surfaces which are a first surface **421** and a second surface **422**. The second surface **422** is the one on the power circuit layer **420***a*. The soldering pads "a" are respectively disposed on the first surface **421** and the second surface **422**. The soldering pads "a" on the first surface **421** are corresponding to those on the second surface **422**. Soldering material "g" can be placed on the soldering pad "a". In the embodiment, considering the stability of soldering and the optimization of automatic process, the LED light strip **200** is disposed below the printed circuit board **420** (the direction is referred to FIG. **101**). That is to say, the first surface **2001** of the LED light strip **200** is connected to the second surface **422** of the printed circuit board **420**.

As shown in FIG. **102** and FIG. **103**, in the soldering process of the LED light strip **200** and the printed circuit board **420**, the circuit protecting layer **200***c* of the LED light strip **200** is placed on a supporting table **52** (i.e., the second surface **2002** of the LED light strip **200** contacts the supporting table **52**) in advance. The soldering pads "a" on the second surface **422** of the printed circuit board **420** directly sufficiently contact the soldering pads "b" on the first surface **2001** of the LED light strip **200**. And then a thermo-compression heating head **51** presses on a portion where the LED light strip **200** and the printed circuit board **420** are soldered to each other. When soldering, the soldering pads "b" on the first surface **2001** of the LED light strip **200** contact the soldering pads "a" on the second surface **422** of the printed circuit board **420**, and the soldering pads "a" on the first surface **421** of the printed circuit board **420** contact the thermo-compression heating head **51**. Under the circumstances, the heat from the thermo-compression heating head **51** can directly transmit through the soldering pads "a" on the first surface **421** of the printed circuit board **420** and the soldering pads "a" on the second surface **422** of the printed circuit board **420** to the soldering pads "b" on the first surface **2001** of the LED light strip **200**. The transmission of the heat between the thermo-compression heating head **51** and the soldering pads "a" and "b" is not likely to be affected by the circuit protecting layer **200***c* which has relatively less thermal conductivity, and, consequently, the efficiency and stability regarding the connections and soldering process of the soldering pads "a" and "b" of the printed circuit board **420** and the LED light strip **200** can be improved. As shown in FIG. **102**, the printed circuit board **420** and the LED light strip **200** are firmly connected to each other by the soldering material "g". Components between the virtual line M and the virtual line N of FIG. **102** from top to bottom are the soldering pads "a" on the first surface **421** of the printed circuit board **420**, the printed circuit board **420**, the power circuit layer **420***a*, the soldering pads "a" on the second surface **422** of the printed circuit board **420**, the soldering pads "b" on the first surface **2001** of LED light strip **200**, the circuit layer **200***a* of the LED light strip **200**, and the circuit protecting layer **200***c* of the LED light strip **200**. The

connection of the printed circuit board **420** and the LED light strip **200** are firm and stable.

In other embodiments, an additional circuit protecting layer can be disposed over the first surface **2001** of the circuit layer **200***a*. In other words, the circuit layer **200***a* is sandwiched between two circuit protecting layers **200***c*, and therefore the first surface **2001** of the circuit layer **200***a* can be protected by the circuit protecting layer **200***c*. A part of the circuit layer **200***a* (the part having the soldering pads "b") is exposed for being connected to the soldering pads "a" of the printed circuit board **420**. Under the circumstances, a part of the bottom of the LED light source **202** contacts the circuit protecting layer **200***c* on the first surface **2001** of the circuit layer **200***a*, and the other part of the bottom of the LED light source **202** contacts the circuit layer **200***a*.

In addition, according to the embodiment shown in FIG. **100** to FIG. **103**, the printed circuit board **420** further comprises through holes "h" passing through the soldering pads "a". In an automatic soldering process, when the thermo-compression heating head **51** automatically presses the printed circuit board **420**, the soldering material "g" on the soldering pads "a" can be pushed into the through holes "h" by the thermo-compression heating head **51** accordingly, which fits the needs of automatic process.

Power supply may be otherwise referred to as a power conversion module/circuit or power module, and encompass the conventional meanings of the term "power supply" commonly understood by one of ordinary skill in the art, including a meaning of "a circuit that converts ac line voltage to dc voltage and supplies power to the LED or LED module". They are called a "power supply" herein as they are for supplying or providing power, from external signal(s) as from AC powerline or a ballast, to the LED module. And these different terms of a "power conversion module/circuit" and a "power module" may be used herein or in future continuing applications to mean/denote the power supply.

As depicted above, in some embodiments, power supply **5** may include a printed circuit board and electronic components. The electronic components have at least one inductor, transistor, capacitor, resistor, or integrated circuit on the first surface of the printed circuit board. The expression of "have at least one . . . or" in the disclosure excluding its parent and child applications means at least one, or any combination thereof. For example, the electronic components may comprise one inductor. The electronic components may comprise two inductors. The electronic components may comprise one resistor. The electronic components may comprise two resistors. The electronic components may comprise one transistor. The electronic components may comprise one integrated circuit. The electronic components may comprise one integrated circuit and one resistor. Alternatively, the electronic components may comprise any combination of at least two of an inductor, a transistor, a capacitor, a resistor, and an integrated circuit. In other words, electronic components may be at least one selected from the group consisting essentially of an inductor, a transistor, a capacitor, a resistor, and an integrated circuit.

If any terms in this application conflict with terms used in any application(s) from which this application claims priority, or terms incorporated by reference into this application or the application(s) from which this application claims priority, a construction based on the terms as used or defined in this application should be applied.

The above-mentioned features of the present invention can be accomplished in any combination to improve the LED tube lamp, and the above embodiments are described by way of example only. The present invention is not herein limited, and many variations are possible without departing from the spirit of the present invention and the scope as defined in the appended claims.

What is claimed is:

1. An LED tube lamp, comprising:

a tube having two ends;

an LED light strip attached to an inner circumferential surface of the tube;

a plurality of LED light sources mounted on the LED light strip;

a power supply module electrically connecting to the LED light strip and configured to drive the plurality of LED light sources; and

a first end cap and second end cap respectively attached at the two ends of the tube, each of the first and second end caps comprising a lateral wall and an end wall, the lateral wall substantially being coaxial with the tube and connecting to the tube, the end wall substantially being perpendicular to an axial direction of the lateral wall and connecting to an end of the lateral wall away from the tube,

wherein the power supply module comprises a printed circuit board and a plurality of electronic components mounted on the printed circuit board, the printed circuit board comprises a first surface and a second surface opposite to and substantially parallel to the first surface, and the first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall;

wherein at least some of the plurality of electronic components comprise a rectifying circuit having at least two input terminals and configured to rectify signal receiving from the at least two input terminals, at least one of the plurality of electronic components comprises a filtering circuit electrically connecting to the rectifying circuit,

wherein the plurality of electronic components comprise a resistor which is positioned closest to the end wall of the first end cap and connecting to one of the input terminals of the rectifying circuit;

wherein the end wall comprises a first portion made of an insulating material.

2. The LED tube lamp according to claim **1**, wherein each of the end caps comprises at least one conductive pin connected to the first portion, and the resistor is electrically connected between the conductive pin and one of the input terminals of the rectifying circuit.

3. The LED tube lamp according to claim **2**, wherein the end wall further comprises a second portion made of metal.

4. The LED tube lamp according to claim **1**, wherein each of the end caps comprises two conductive pins connected to the first portion, and the resistor is electrically connected between the two conductive pins.

5. The LED tube lamp according to claim **1**, wherein the end wall comprises at least one opening.

6. The LED tube lamp according to claim **5**, wherein the resistor is positioned closest to the opening.

7. The LED tube lamp according to claim **5**, wherein the LED tube lamp further comprises a heat-dissipating element being extended between the opening on the end wall of the first end cap and the power supply module.

8. The LED tube lamp according to claim **7**, wherein an end of the heat-dissipating element is mounted on the printed circuit board.

9. The LED tube lamp according to claim **8**, wherein a part of the heat-dissipating element is disposed in the opening on the end wall of the first end cap.

10. The LED tube lamp according to claim 9, wherein each of the two end caps comprises at least one pin, the pin is a hollow conductive pin and the power supply is coupled to the pin.

11. The LED tube lamp according to claim 9, wherein the heat-dissipating element is made of metal.

12. The LED tube lamp according to claim 1, wherein at least some of the electronic components form a first circuit electrically connected between the rectifying circuit and the filtering circuit and causes a delay before the LED tube lamp lights up.

13. The LED tube lamp according to claim 12, wherein the electronic components forming the first circuit comprises a capacitor configured to be charged when an AC driving signal is provided to the LED tube lamp and cause the LED tube lamp to conduct when voltage of the capacitor exceeds a threshold trigger voltage.

14. The LED tube lamp according to claim 12, wherein the LED tube lamp is delayed to light up by 0.1 to 3 seconds.

15. The LED tube lamp according to claim 1, wherein at least some of the electronic components form a driving circuit electrically connected to filtering output terminals of the filtering circuit and have two driving output terminals electrically connected to the LED light strip; and further wherein the driving circuit comprises:

a controller;

a diode, having an anode electrically connected to one of the filtering output terminals and one of the driving output terminals;

a switch, having a first terminal coupled to the other one of the filtering output terminals, a second terminal electrically connected to a cathode of the diode, and a control terminal coupled to the controller, wherein the switch is turned on or off in response to a signal received from the controller; and

an inductor, having an end electrically connected to the second terminal of the switch, and another end electrically connected to the LED light strip via the other one of the driving output terminals.

16. The LED tube lamp according to claim 15, wherein the electronic components forming the driving circuit further comprise:

a capacitor, electrically connected between the driving output terminals.

17. An LED tube lamp, comprising:

a tube having two ends;

an LED light strip attached to an inner circumferential surface of the tube;

a plurality of LED light sources mounted on the LED light strip;

a power supply module electrically connecting to the LED light strip and configured to drive the plurality of LED light sources; and

a first end cap and second end cap respectively attached at the two ends of the tube, each of the first and second end caps comprising a lateral wall and an end wall, the lateral wall substantially being coaxial with the tube and connecting to the tube, the end wall substantially being perpendicular to an axial direction of the lateral wall and connecting to an end of the lateral wall away from the tube,

wherein the power supply module comprises a printed circuit board and a plurality of electronic components mounted on the printed circuit board, the printed circuit board comprises a first surface and a second surface opposite to and substantially parallel to the first surface, and the first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall;

wherein at least some of the electronic components comprise a rectifying circuit having at least two input terminals and configured to rectify signal receiving from the input terminals, at least one of the electronic components comprises a filtering circuit electrically connecting to the rectifying circuit,

wherein the filtering circuit comprises an inductor, the inductor is positioned closest to the end wall of one of the first and second end caps and connect to one of the input terminals of the rectifying circuit;

wherein the end wall comprises a first portion made of an insulating material.

18. The LED tube lamp according to claim 17, wherein the end wall further comprises a second portion made of metal.

19. The LED tube lamp according to claim 17, wherein the end wall comprises at least one opening.

20. The LED tube lamp according to claim 19, wherein the inductor is positioned closest to the opening.

21. The LED tube lamp according to claim 19, wherein the LED tube lamp further comprises a heat-dissipating element being extended between the opening on the end wall of one of the first and second end caps and the power supply module.

22. The LED tube lamp according to claim 21, wherein an end of the heat-dissipating element is mounted on the printed circuit board.

23. The LED tube lamp according to claim 22, wherein a part of the heat-dissipating element is disposed in the opening on the end wall of the first end cap.

24. The LED tube lamp according to claim 23, wherein each of the two end caps comprises at least one pin, the pin is a hollow conductive pin and the power supply is coupled to the pin.

25. The LED tube lamp according to claim 23, wherein the heat-dissipating element is made of metal.

26. The LED tube lamp according to claim 17, wherein at least some of the electronic components comprises a first circuit electrically connected between the rectifying circuit and the filtering circuit and causes the LED tube lamp to delay in lighting up.

27. The LED tube lamp according to claim 26, wherein the electronic components forming the first circuit comprise a bidirectional triode thyristor having a first terminal and a control terminal receiving signal output from the rectifying circuit, and a second terminal electrically connected to the filtering circuit and the LED light strip.

28. The LED tube lamp according to claim 17, wherein at least some of the electronic components comprise a capacitor electrically connected between the two input terminals of the rectifying circuit and a resistor electrically connected to the capacitor in parallel.

29. The LED tube lamp according to claim 28, wherein the capacitor and the resistor form a filament-simulating circuit.

30. An LED tube lamp, comprising:

a tube having two ends;

an LED light strip attached to an inner circumferential surface of the tube;

a plurality of LED light sources mounted on the LED light strip;

a power supply module electrically connecting to the LED light strip and configured to drive the plurality of LED light sources; and

a first end cap and second end cap respectively attached at two ends of the tube, each of the first and second end caps comprising a lateral wall and an end wall, the lateral wall substantially being coaxial with the tube and connecting to the tube, the end wall substantially being perpendicular to an axial direction of the lateral wall and connecting to an end of the lateral wall away from the tube,

wherein the power supply module comprises a printed circuit board and a plurality of electronic components mounted on the printed circuit board, the printed circuit board comprises a first surface and a second surface opposite to and substantially parallel to the first surface, and the first surface and the second surface of the printed circuit board are substantially parallel with the axial direction of the lateral wall;

wherein at least some of the electronic components comprise a rectifying circuit having at least two input terminals and configured to rectify signal receiving from the input terminals, at least one of the electronic components comprises a filtering circuit electrically connected to the rectifying circuit,

wherein the plurality of electronic components comprise a capacitor which is positioned closest to the end wall of the first end cap;

wherein the end wall comprises a first portion made of an insulating material.

31. The LED tube lamp according to claim **30**, wherein the end wall comprises at least one opening.

32. The LED tube lamp according to claim **31**, wherein the LED tube lamp further comprises a heat-dissipating element being extended between the opening on the end wall of the first end cap and the power supply module.

33. The LED tube lamp according to claim **32**, wherein an end of the heat-dissipating element is mounted on the printed circuit board.

34. The LED tube lamp according to claim **33**, wherein a part of the heat-dissipating element is disposed in the opening on the end wall of the first end cap.

35. The LED tube lamp according to claim **34**, wherein each of the two end caps comprises at least one pin, the pin is a hollow conductive pin and the power supply is coupled to the pin.

36. The LED tube lamp according to claim **34**, wherein the heat-dissipating element is made of metal.

37. The LED tube lamp according to claim **30**, wherein the capacitor connects between the input terminals of the rectifying circuit.

38. The LED tube lamp according to claim **30**, wherein at least some of the electronic components form a driving circuit electrically connected to filtering output terminals of the filtering circuit and having two driving output terminals electrically connecting to the LED light strip, and further wherein the driving circuit comprises:

a controller;

a diode, having an anode electrically connected to one of the filtering output terminals and one of the driving output terminals;

a switch, having a first terminal coupled to the other one of the filtering output terminals, a second terminal electrically connected to a cathode of the diode, and a control terminal coupled to the controller, wherein the switch is turned on or off in response to a signal received from the controller; and

an inductor, having an end electrically connected to the second terminal of the switch, and another end electrically connected to the LED light strip via the other one of the driving output terminals.

39. The LED tube lamp according to claim **30**, wherein at least some of the electronic components form a mode switching circuit configured to determine to perform a first driving mode or a second driving mode according to frequency of an AC driving signal received by the rectifying circuit.

40. The LED tube lamp according to claim **30**, wherein at least some of the electronic components form a protection circuit configured to determine whether to enter a protection state and limit, restrain or clamp down on a level of a signal flew through the power supply module under the protection state.

41. The LED tube lamp according to claim **40**, wherein the protection circuit comprises:

a switch circuit, configured to be turned on or off in response to a current detection signal indicating whether a current of the LED tube lamp exceeds a reference value.

42. The LED tube lamp according to claim **41**, wherein the switch circuit is coupled to at least part of the LED light sources in parallel.

43. The LED tube lamp according to claim **41**, wherein the switch circuit is a thyristor.

44. The LED tube lamp according to claim **41**, wherein at least one of the electronic components is a diode having an anode coupled to a first terminal of the switch circuit.

45. The LED tube lamp according to claim **41**, wherein at least some of the electronic components comprises:

a resistor; and

a bipolar junction transistor, coupled to the switch circuit and receiving the current detection signal via the resistor,

wherein the bipolar junction transistor is turned on or off in response to the current detection signal and cause a voltage level of the collector of the bipolar junction transistor being shifted correspondingly,

wherein the voltage level of the collector of the bipolar junction transistor affects on/off state of the switch circuit.

46. The LED tube lamp according to claim **45**, wherein when the protection circuit does not enter the protection state, the switch circuit and the bipolar junction transistor are in a cutoff state.

47. The LED tube lamp according to claim **4**, wherein the rectifying circuit comprises:

a first full-wave bridge rectifying circuit, having two input terminals electrically connected to the two conductive pins of one of the end caps, respectively, and having a positive output terminal and a negative output terminal; and

a second full-wave bridge rectifying circuit, having two input terminals electrically connected to the two conductive pins of the other one of the end caps, respectively, and having a positive output terminal and a negative output terminal,

wherein the positive output terminals of the first and the second full-wave bridge rectifying circuits are electrically connected to each other, and the negative output terminals of the first and the second full-wave bridge rectifying circuits are electrically connected to each other.

48. The LED tube lamp according to claim **47**, wherein the filtering circuit comprises:

an inductor, having an end electrically connected to the positive output terminals of the first and the second

full-wave bridge rectifying circuits, and another end that is a filtering output terminal of the filtering circuit;

a first capacitor, having an end electrically connected to the end of the inductor, and the other end electrically connected to the negative output terminals of the first and the second full-wave bridge rectifying circuits; and

a second capacitor, having an end electrically connected to the other end of the inductor, and another end that is another filtering output terminal of the filtering circuit.

49. The LED tube lamp according to claim **4**, wherein the rectifying circuit comprises:

a full-wave bridge rectifying circuit, having two input terminals electrically connected to the two conductive pins of one of the end caps, respectively, and having a positive output terminal and a negative output terminal; and

a half-wave bridge rectifying circuit, having an input terminal electrically connected to one of the two conductive pins of the other one of the end caps, and having a positive output terminal and a negative output terminal,

wherein the positive output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit are electrically connected to each other, and the negative output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit are electrically connected to each other.

50. The LED tube lamp according to claim **49**, wherein the filtering circuit comprises:

a first capacitor, having an end electrically connected to the positive output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit, and another end electrically connected to the negative output terminals of the full-wave bridge rectifying and the half-wave rectifying circuit.

51. The LED tube lamp according to claim **50**, wherein the filtering circuit further comprises:

an inductor, having an end electrically connected to the end of the first capacitor, and another end that is a filtering output terminal of the filtering circuit; and

a second capacitor, having an end electrically connected to the other end of the inductor, and another end that is another filtering output terminal of the filtering circuit.

52. The LED tube lamp according to claim **50**, wherein the filtering circuit further comprises:

an EMI-reducing capacitor, coupled between the two conductive pins of one of the end caps.

53. The LED tube lamp according to claim **15**, wherein the driving circuit comprises:

a controller;

a diode, having an anode electrically connected to one of the filtering output terminals and one of the driving output terminals;

a switch, having a first terminal coupled to a cathode of the diode, a second terminal coupled to the other one of the filtering output terminals, and a control terminal coupled to the controller, wherein the switch is turned on or off in response to a signal received from the controller; and

an inductor, having an end electrically connected to the first terminal of the switch and the anode of the diode, and another end electrically connected to the LED light strip via the other one of the driving output terminals.

54. The LED tube lamp according to claim **53**, wherein at least some of the electronic components form a mode switching circuit configured to determine to perform a first driving mode or a second driving mode according to frequency of an AC driving signal received by the rectifying circuit.

55. The LED tube lamp according to claim **54**, wherein the mode switching circuit allows the driving circuit transforming a signal received from the filtering output terminals into a driving signal for driving the LED light sources when performing the first driving mode.

56. The LED tube lamp according to claim **55**, wherein the mode switching circuit makes the driving circuit stop working in conducting the signal received from the filtering output terminals when performing the second driving mode.

57. The LED tube lamp according to claim **54**, wherein the mode switching circuit makes at least a component of the driving circuit being bypassed when performing the second driving mode.

58. The LED tube lamp according to claim **57**, wherein the component of the driving circuit being bypassed comprises at least one of the inductor and the switch.

59. The LED tube lamp according to claim **57**, wherein when the mode switching circuit determines on performing the second driving mode, the mode switching circuit conducts current in a conductive path, so that one of the driving output terminals is coupled to one of the filtering output terminals by bypassing the component.

60. The LED tube lamp according to claim **59**, wherein the mode switching circuit conducting current in the conductive path makes the driving circuit stop working.

61. The LED tube lamp according to claim **54**, wherein the mode switching circuit performs the first driving mode when receiving a low-frequency AC driving signal and performs the second driving mode when receiving a high-frequency AC driving signal.

62. The LED tube lamp according to claim **61**, wherein the low-frequency AC driving signal has frequency lower than 10 kHz, and the high-frequency AC driving signal has frequency higher than 10 kHz.

63. The LED tube lamp according to claim **62**, wherein the low-frequency AC driving signal has frequency of 50 Hz or 60 Hz.

64. The LED tube lamp according to claim **62**, wherein the high-frequency AC driving signal has frequency of 20 kHz to 50 kHz.

65. The LED tube lamp according to claim **4**, wherein at least some of the electronic components form a filament-simulating circuit configured to conduct current during a preheat process when the LED tube lamp is powered by a ballast.

66. The LED tube lamp according to claim **65**, wherein the filament-simulating circuit comprises:

a capacitor, coupled between the two conductive pins of one of the end caps.

67. The LED tube lamp according to claim **66**, wherein the filament-simulating circuit further comprises:

a second resistor, coupled to the capacitor in parallel.

68. The LED tube lamp according to claim **21**, wherein at least some of the electronic components form a driving circuit electrically connected to filtering output terminals of the filtering circuit and having two driving output terminals electrically connecting to the LED light strip.

69. The LED tube lamp according to claim **68**, wherein the driving circuit comprises:

a controller;

a diode, having an anode electrically connected to one of the filtering output terminals and one of the driving output terminals;

a switch, having a first terminal coupled to another one of the filtering output terminals, a second terminal electrically connected to a cathode of the diode, and a control terminal coupled to the controller, wherein the switch is turned on or off in response to a signal received from the controller; and

an inductor, having an end electrically connected to the second terminal of the switch, and another end electrically connected to the LED light strip via the other one of the driving output terminals.

70. The LED tube lamp according to claim **17**, wherein at least some of the electronic components form a protection circuit configured to determine whether to enter a protection state and limit, restrain or clamp down on a level of a signal flow through the power supply module under the protection state.

71. The LED tube lamp according to claim **70**, wherein the protection circuit comprises:

a switch circuit, configured to be turned on or off in response to a current detection signal indicating whether a current of the LED tube lamp exceeds a reference value.

72. The LED tube lamp according to claim **71**, wherein the switch circuit is coupled to at least part of the LED light sources in parallel.

73. The LED tube lamp according to claim **71**, wherein the switch circuit is a thyristor.

74. The LED tube lamp according to claim **71**, wherein at least one of the electronic components is a diode having an anode coupled to a first terminal of the switch circuit.

75. The LED tube lamp according to claim **71**, wherein at least some of the electronic components comprises:

a resistor; and

a bipolar junction transistor, coupled to the switch circuit and receiving the current detection signal via the resistor,

wherein the bipolar junction transistor is turned on or off in response to the current detection signal and causes a voltage level of a collector of the bipolar junction transistor to be shifted correspondingly,

wherein the voltage level of the collector of the bipolar junction transistor affects on/off state of the switch circuit.

76. The LED tube lamp according to claim **75**, wherein when the protection circuit does not enter the protection state, the switch circuit and the bipolar junction transistor are in a cutoff state.

77. The LED tube lamp according to claim **30**, wherein the rectifying circuit comprises:

a first full-wave bridge rectifying circuit, having two input terminals electrically connected to two conductive pins of one of the first and the second end caps, respectively, and having a positive output terminal and a negative output terminal; and

a second full-wave bridge rectifying circuit, having two input terminals electrically connected to two conductive pins of the other one of the first and the second end caps, respectively, and having a positive output terminal and a negative output terminal,

wherein the positive output terminals of the first and the second full-wave bridge rectifying circuits are electrically connected to each other, and the negative output terminals of the first and the second full-wave bridge rectifying circuits are electrically connected to each other.

78. The LED tube lamp according to claim **77**, wherein the filtering circuit comprises:

an inductor, having an end electrically connected to the positive output terminals of the first and the second full-wave bridge rectifying circuits, and another end that is a filtering output terminal of the filtering circuit;

a first capacitor, having an end electrically connected to the other end of the inductor, and another end that is another filtering output terminal of the filtering circuit.

79. The LED tube lamp according to claim **78**, wherein the filtering circuit further comprises:

a second capacitor, having an end electrically connected to the end of the inductor, and another end electrically connected to the negative output terminals of the first and the second full-wave bridge rectifying circuits.

80. The LED tube lamp according to claim **78**, wherein the filtering circuit further comprises:

an EMI-reducing capacitor, coupled between the two conductive pins of one of the first and the second end caps.

81. The LED tube lamp according to claim **30**, wherein the rectifying circuit comprises:

a full-wave bridge rectifying circuit, having two input terminals electrically connected to two conductive pins of one of the first and the second end caps, respectively, and having a positive output terminal and a negative output terminal; and

a half-wave bridge rectifying circuit, having an input terminal electrically connected to one of two conductive pins of the other one of the first and the second end caps, and having a positive output terminal and a negative output terminal,

wherein the positive output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit are electrically connected to each other, and the negative output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit are electrically connected to each other.

82. The LED tube lamp according to claim **81**, wherein the filtering circuit comprises:

a first capacitor, having an end electrically connected to the positive output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit, and another end electrically connected to the negative output terminals of the full-wave bridge rectifying circuit and the half-wave bridge rectifying circuit.

83. The LED tube lamp according to claim **82**, wherein the filtering circuit further comprises:

an EMI-reducing capacitor, coupled between the two conductive pins of one of the first and the second end caps.

84. The LED tube lamp according to claim **30**, wherein at least some of the electronic components form a filament-simulating circuit configured to conduct current during a preheat process when the LED tube lamp is powered by a ballast.

85. The LED tube lamp according to claim **84**, wherein the filament-simulating circuit comprises:

a second capacitor, coupled between the two conductive pins of one of the first and the second end caps.

86. The LED tube lamp according to claim **85**, wherein the filament-simulating circuit further comprises:

a resistor, coupled to the second capacitor in parallel.

87. The LED tube lamp according to claim **81**, wherein the rectifying circuit further comprises a current-limiting capacitor coupled to one of the input terminals of the full-wave bridge rectifying circuit in series.

88. The LED tube lamp according to claim 1, wherein the tube is a glass tube.

89. The LED tube lamp according to claim 17, wherein the tube is a glass tube.

90. The LED tube lamp according to claim 30, wherein the tube is a glass tube.

* * * * *