



US008754594B2

(12) **United States Patent**
Lenk et al.

(10) **Patent No.:** **US 8,754,594 B2**
(45) **Date of Patent:** **Jun. 17, 2014**

(54) **THERMAL PROTECTION CIRCUIT FOR AN LED BULB**

(71) Applicant: **Switch Bulb Company, Inc.**, San Jose, CA (US)

(72) Inventors: **Ronald J. Lenk**, Woodstock, GA (US);
John D. Grainger, Fremont, CA (US)

(73) Assignee: **Switch Bulb Company, Inc.**, San Jose, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/647,324**

(22) Filed: **Oct. 8, 2012**

(65) **Prior Publication Data**

US 2013/0033179 A1 Feb. 7, 2013

Related U.S. Application Data

(63) Continuation of application No. 13/155,361, filed on Jun. 7, 2011, now Pat. No. 8,283,877.

(51) **Int. Cl.**
H05B 37/02 (2006.01)

(52) **U.S. Cl.**
USPC **315/311**; 315/291; 315/308

(58) **Field of Classification Search**
USPC 315/291, 307-308, 311, 294, 297, 300, 315/302; 361/93.8, 106; 362/650
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,939,839 A * 8/1999 Robel et al. 315/289
6,111,739 A * 8/2000 Wu et al. 361/106

6,693,394 B1 2/2004 Guo et al.
7,558,084 B2 7/2009 Jang
7,812,550 B2 * 10/2010 Harmgardt et al. 315/291
7,872,527 B2 1/2011 Smith
7,946,730 B2 5/2011 Catalano et al.
7,948,190 B2 5/2011 Grajcar
7,986,112 B2 * 7/2011 West 315/309
8,174,811 B2 * 5/2012 Hasunuma et al. 361/106
2008/0224634 A1 * 9/2008 Scilia 315/294

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2012/041420, mailed on Aug. 10, 2012, 9 pages.

(Continued)

Primary Examiner — Douglas W Owens


Assistant Examiner — Henry Luong

(74) *Attorney, Agent, or Firm* — Morrison & Foerster LLP

(57) **ABSTRACT**

A light-emitting diode (LED) bulb has an LED within a shell. The LED bulb includes a driver circuit for providing current to the LED. The drive circuit has a thermal protection circuit, which includes a first positive thermal coefficient thermistor with a first switching temperature connected in series with a second positive thermal coefficient thermistor with a second switching temperature. The driver circuit includes a switch-mode power supply (SMPS) controller with an input pin and an output pin. The thermistors are connected to the input pin. When either thermistor temperature is above the respective switching temperatures, the thermal protection circuit causes the SMPS controller to produce a signal with a second duty cycle on the output pin. When both thermistor temperatures are below the respective switching temperatures, the thermal protection circuit causes the SMPS controller to produce a signal with a first duty cycle on the output pin.

25 Claims, 8 Drawing Sheets

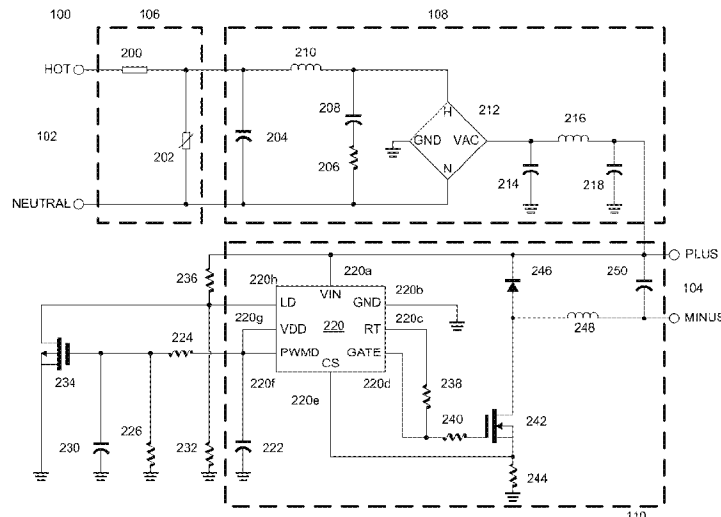

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0195186	A1	8/2009	Guest et al.	
2009/0295292	A1	12/2009	Harmgardt et al.	
2010/0033113	A1	2/2010	Maruyama et al.	
2010/0134024	A1	6/2010	Brandes	
2011/0037387	A1 *	2/2011	Chou et al.	315/35
2011/0109229	A1	5/2011	Akins	
2011/0121727	A1	5/2011	Sharrah et al.	
2012/0212129	A9 *	8/2012	Chou et al.	315/35

OTHER PUBLICATIONS

Non Final Office Action received for U.S. Appl. No. 13/155,361, mailed on Feb. 3, 2012, 16 pages.
 Notice of Allowance received for U.S. Appl. No. 13/155,361, mailed on Jun. 11, 2012, 8 pages.
 Notice of Allowance received for U.S. Appl. No. 13/155,361, mailed on Jun. 22, 2012, 6 pages.
 International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2012/041420, mailed on Dec. 27, 2013, 7 pages.

* cited by examiner

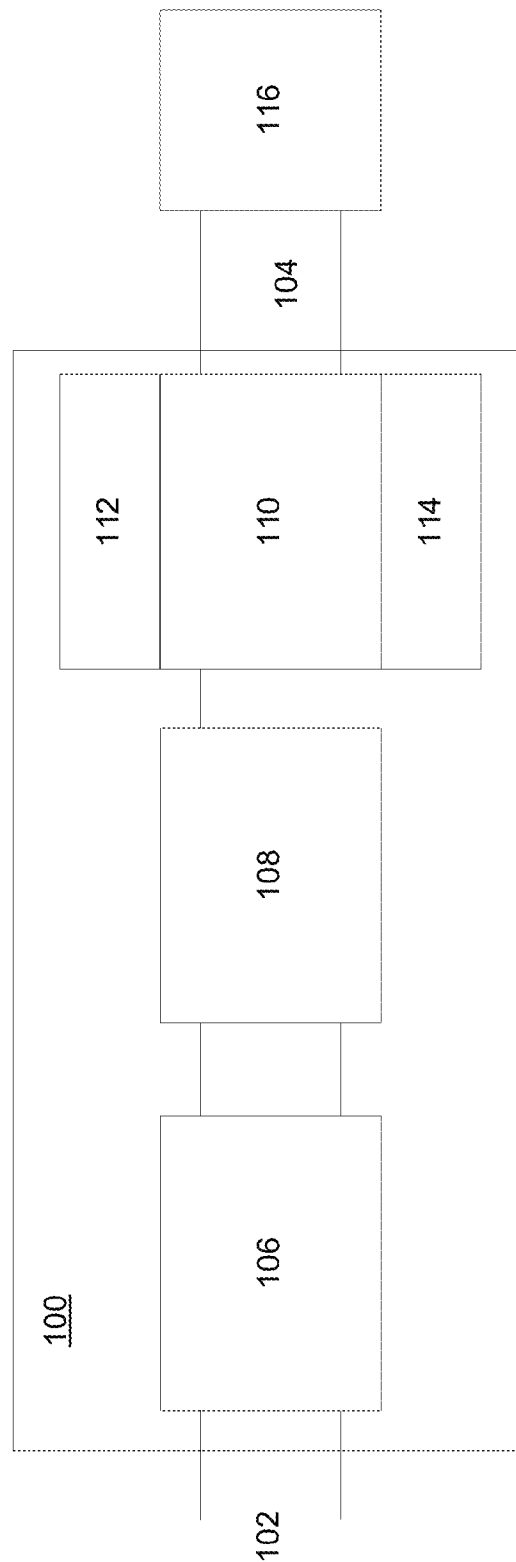


Fig. 1

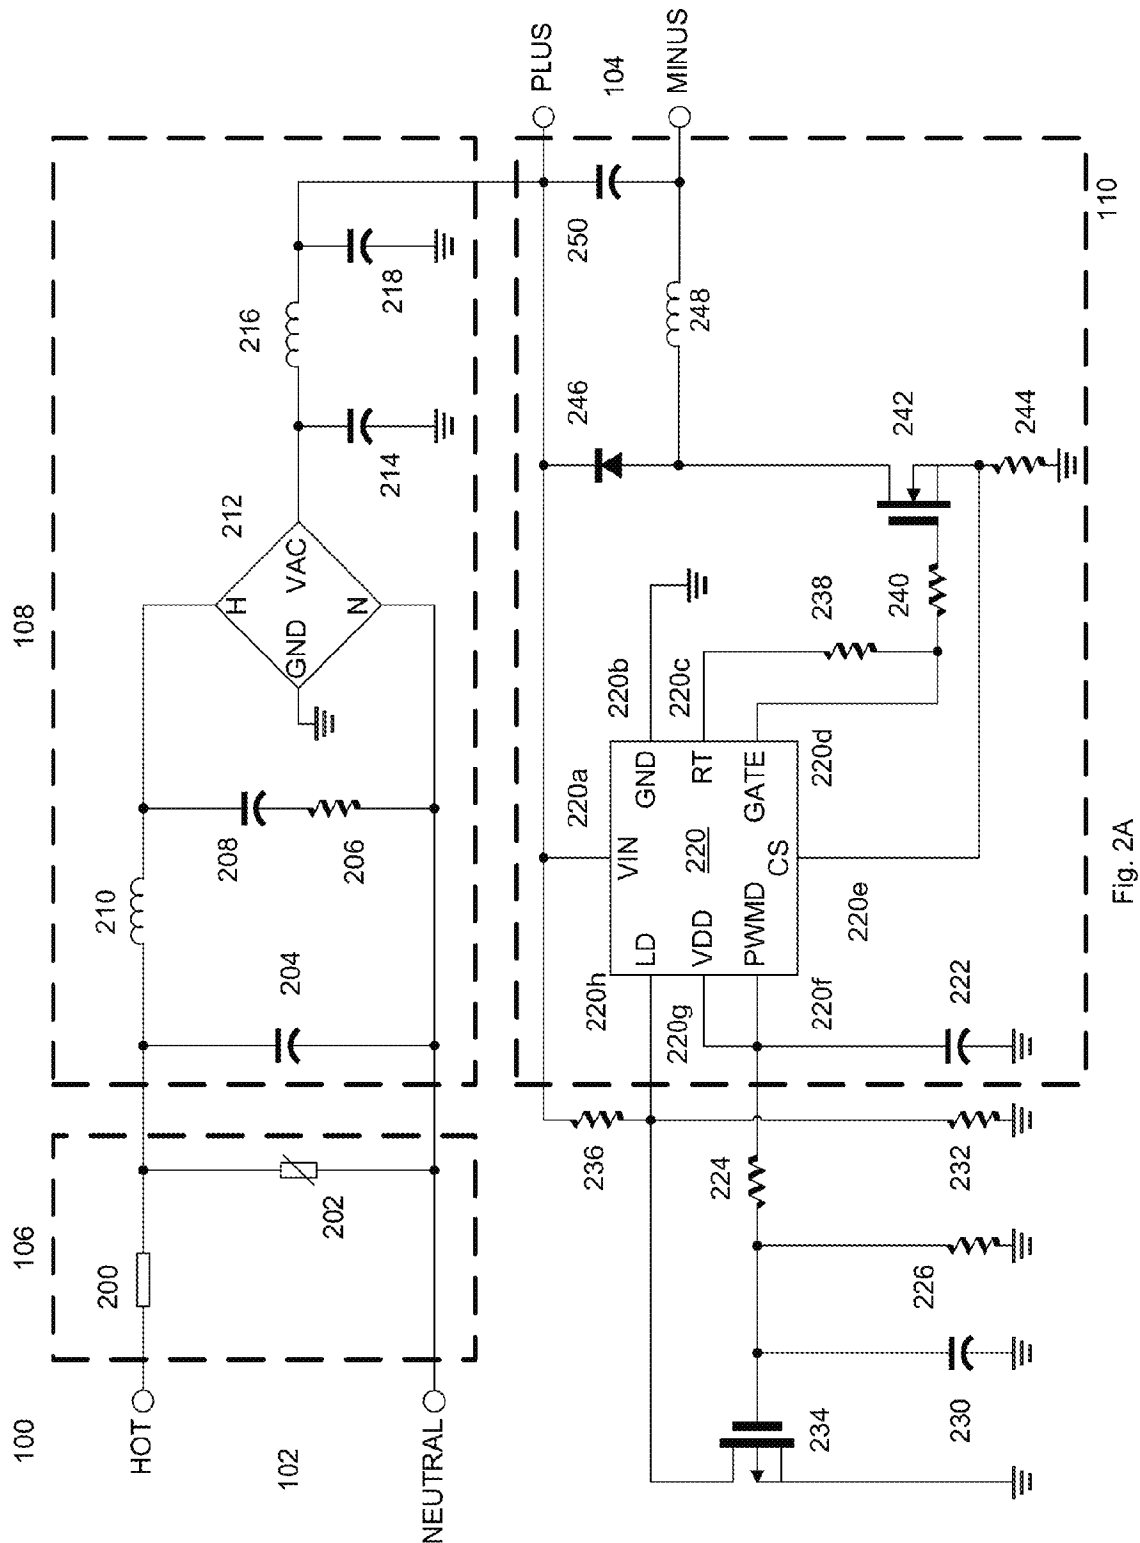


Fig. 2A

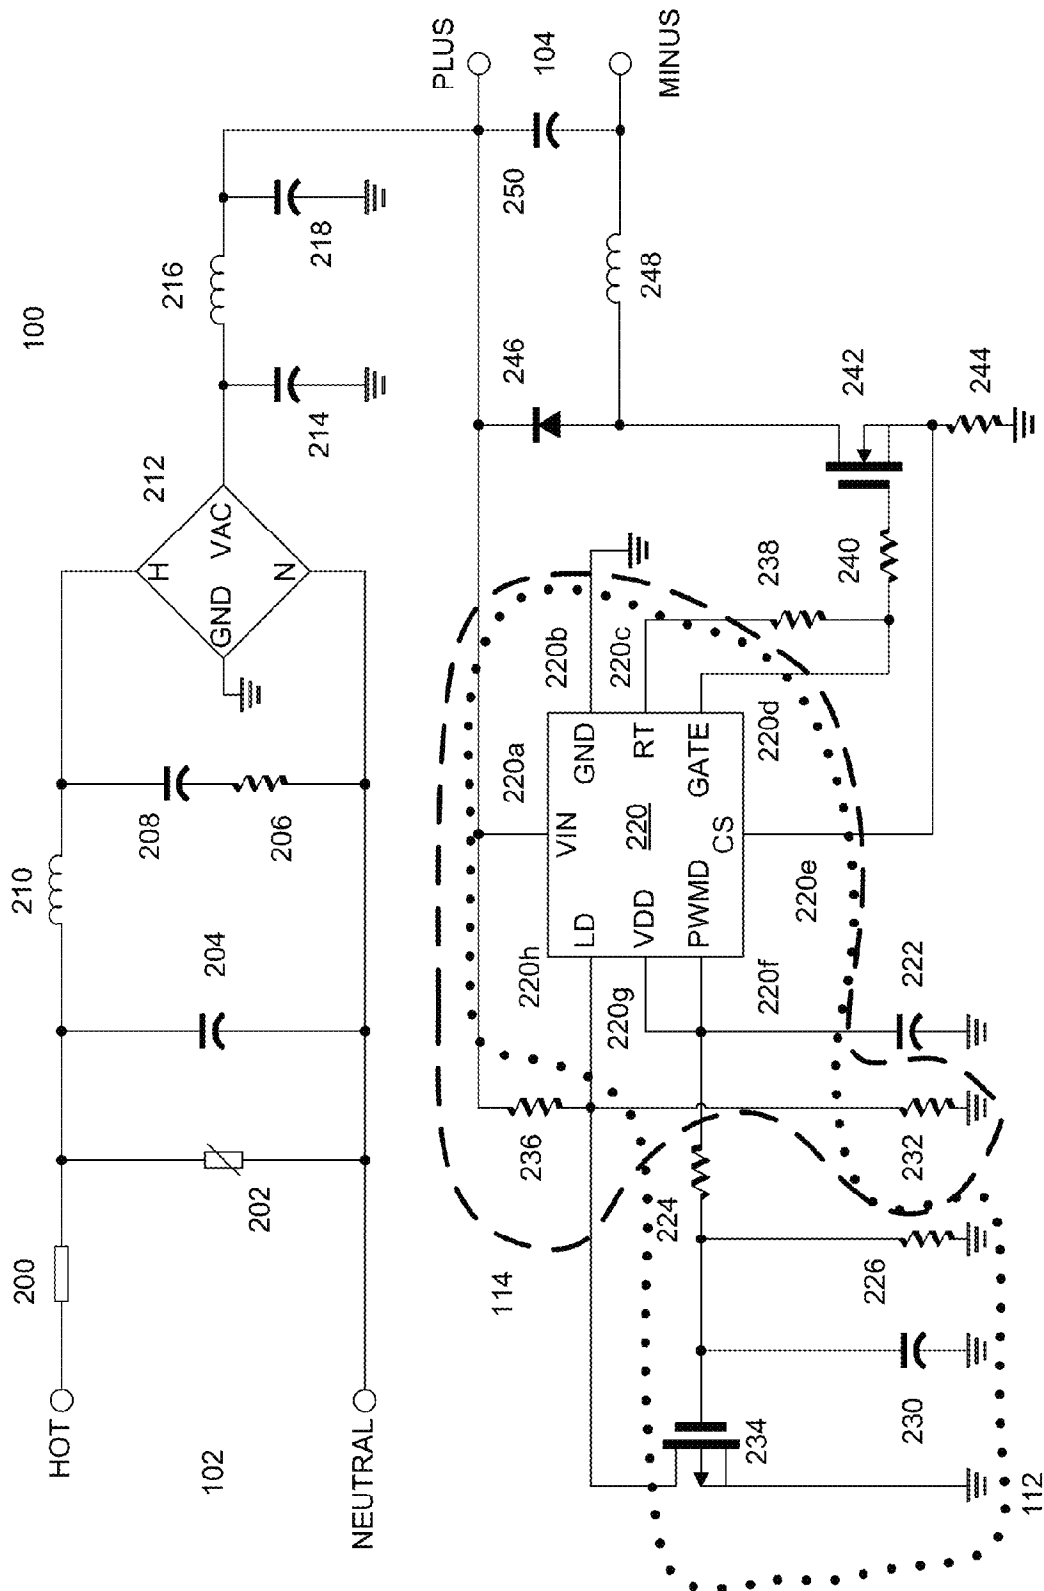


Fig. 2B

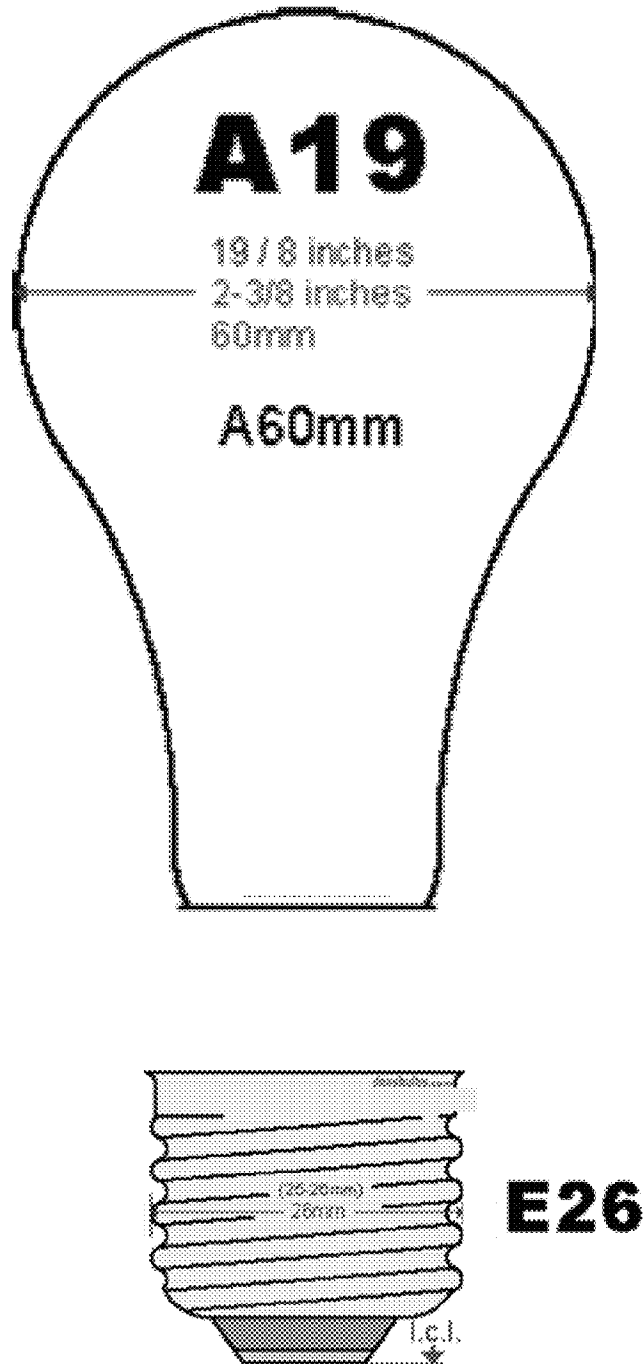


Fig. 3

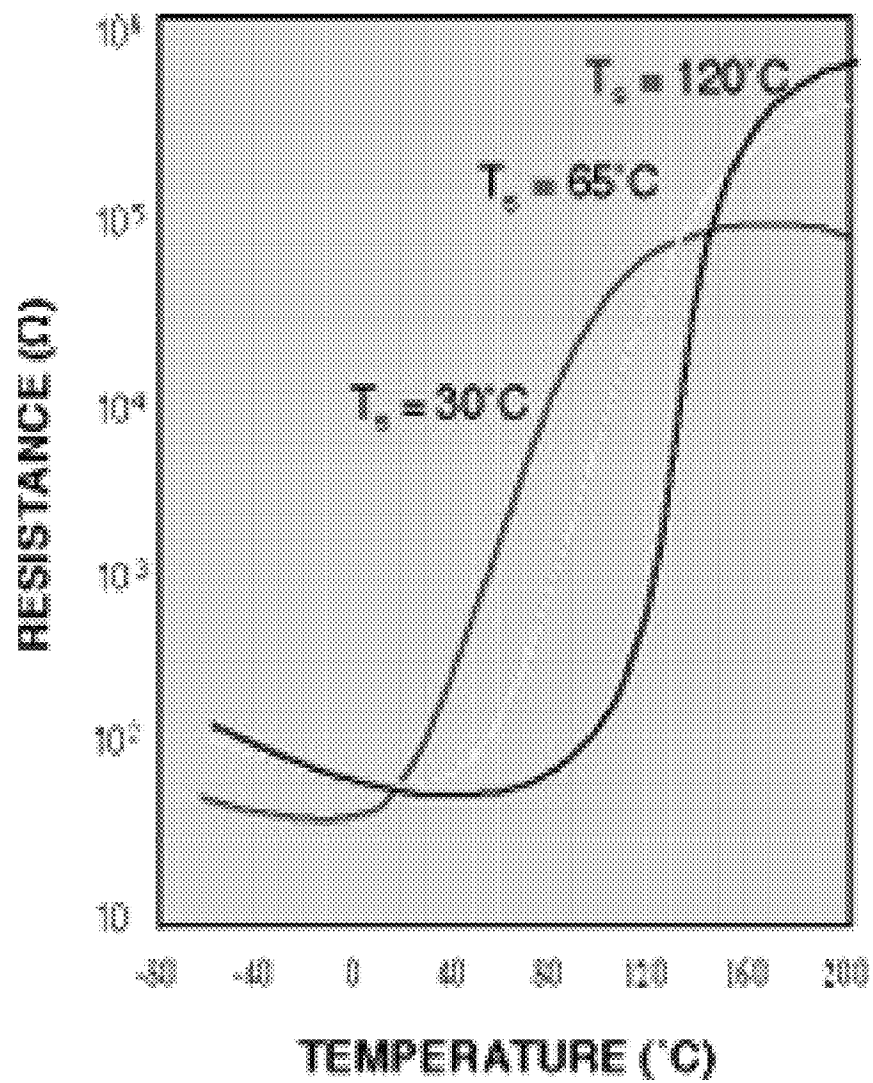


Fig. 4

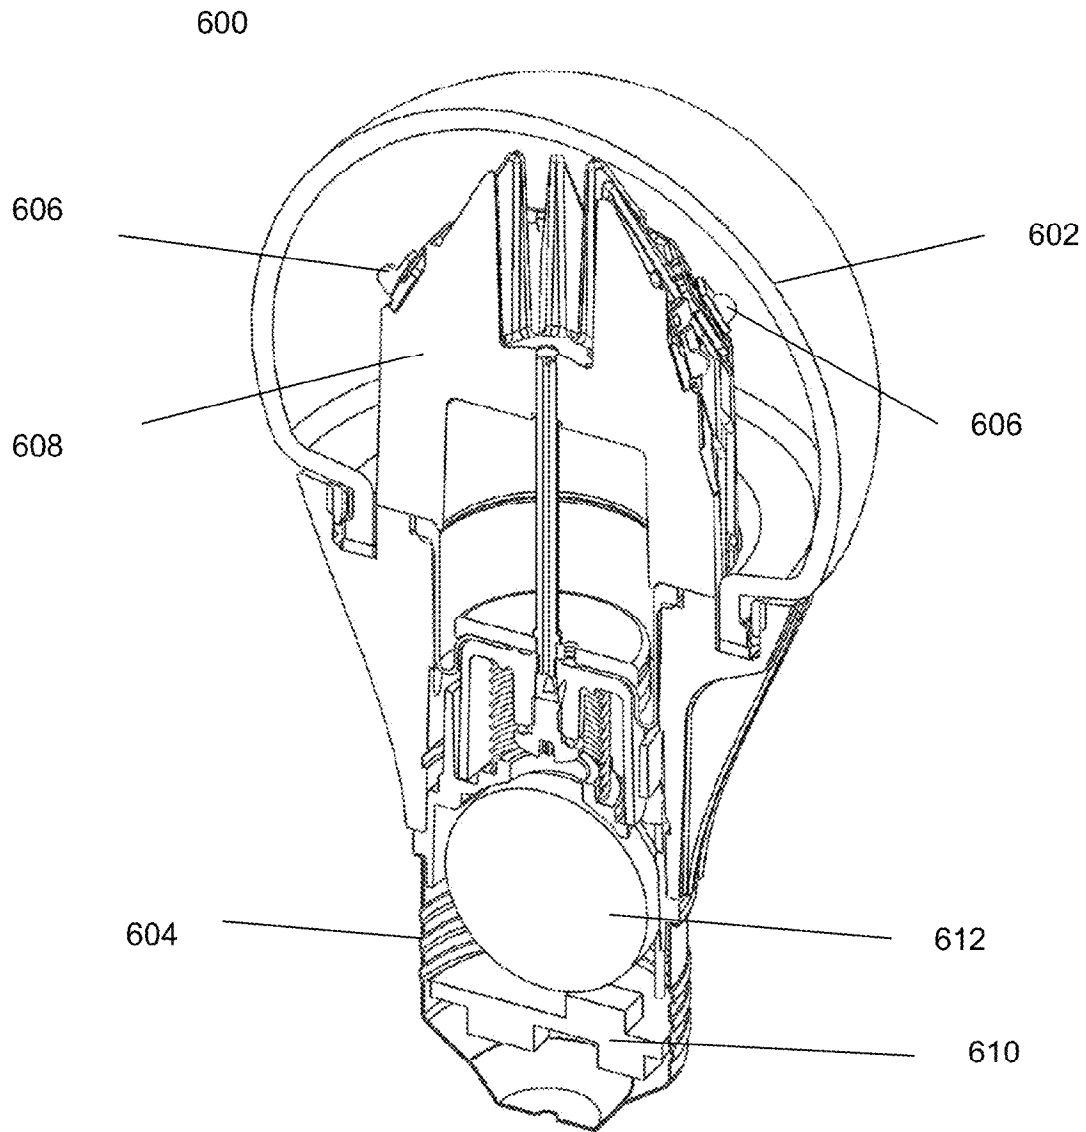


Fig. 6

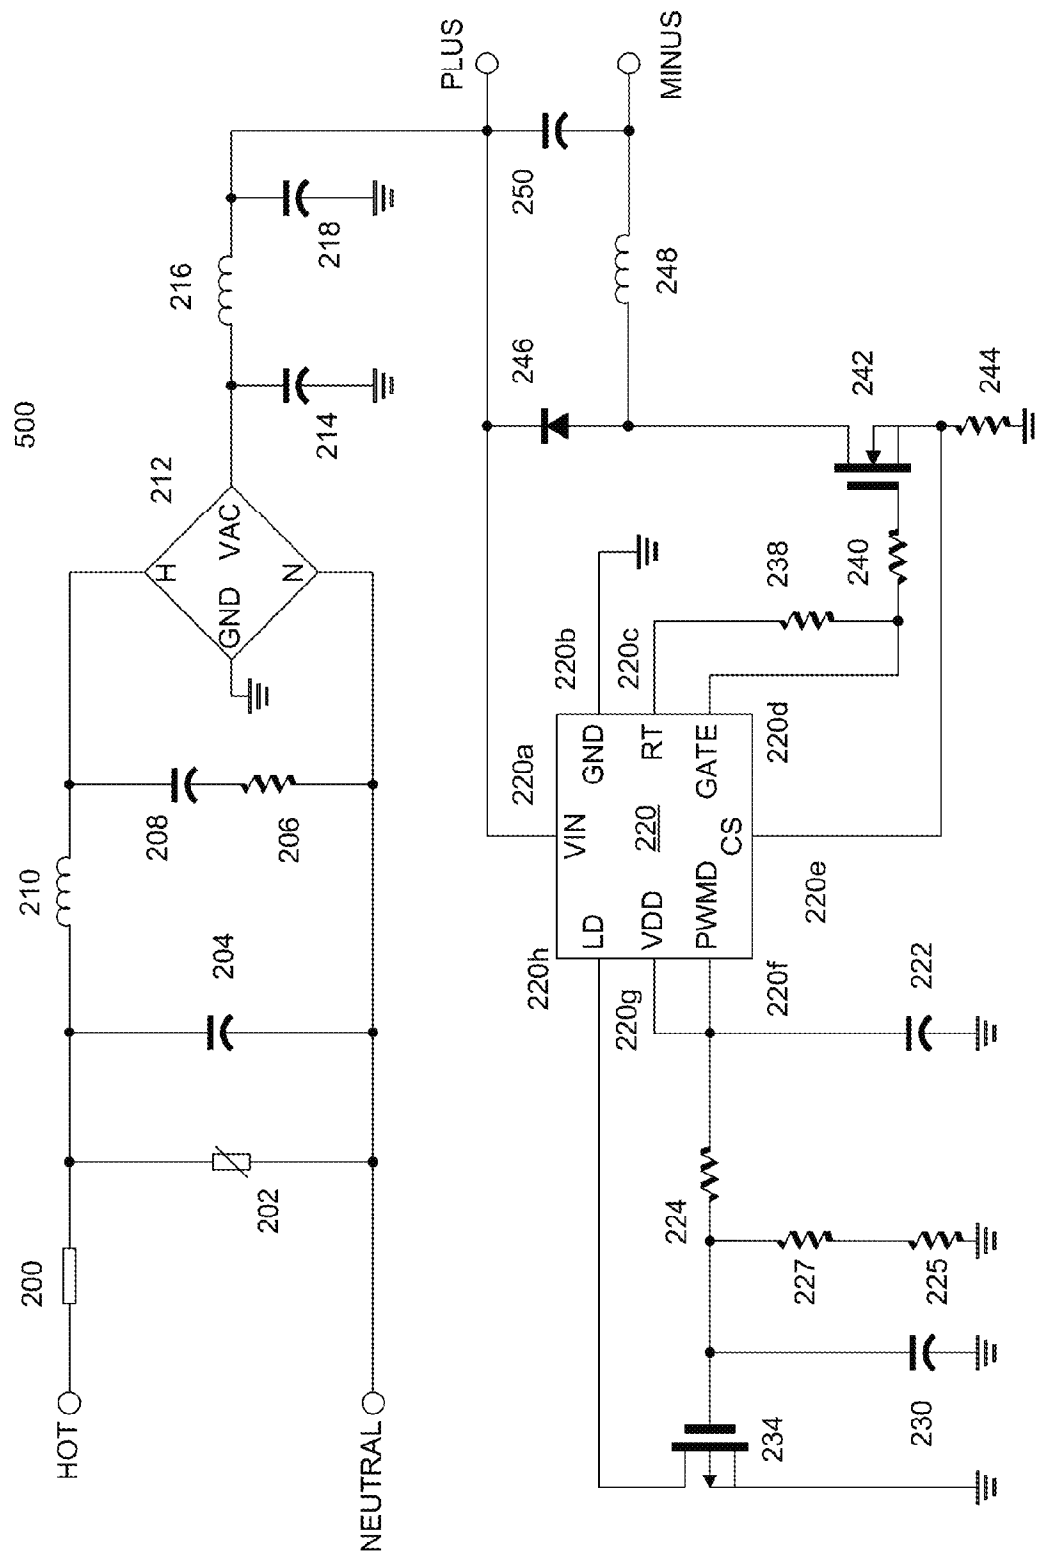


Fig. 7

1

THERMAL PROTECTION CIRCUIT FOR AN LED BULB

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a Continuation of U.S. application Ser. No. 13/155,361, filed on Jun. 7, 2011, issued as U.S. Pat. No. 8,283,877 on Oct. 9, 2012, which is hereby incorporated by reference in its entirety for all purposes.

BACKGROUND

1. Field

The present disclosure generally relates to a driver circuit for light-emitting diode (LED) bulbs, and, more particularly, to a driver circuit with thermal protection circuitry for preventing damage to an LED bulb that may result from overheating.

2. Description of the Related Art

High temperatures may reduce the operating life of an LED bulb. The LEDs, the driver circuitry, and the cooling system may all be sensitive to heat build-up in the LED bulb. Failure in any one of these components may result in failure of the LED bulb.

The operating temperature of an LED bulb depends on many factors. For example, each individual LED produces heat. Therefore, the number and type of LEDs present in the bulb may affect the amount of heat the LED bulb produces. Additionally, drive circuitry may also produce significant amounts of heat.

Other factors may determine the rate at which generated heat is dissipated. For example, the nature of the enclosure into which the LED bulb is installed may dictate the orientation of the LED bulb, the insulating properties surrounding the LED bulb, and the direction of the convective air stream flowing over the LED bulb. Each of these factors may have a dramatic effect on the build-up of heat in and around the LED bulb.

Accordingly, it may be desirable to dim or turn off the LEDs when the LED bulb or portions of the LED bulb reach certain temperatures. However, the additional circuitry required for this task must fit, along with the other required components, within the limited form factor of the LED bulb.

In the United States, a common lamp bulb form factor is the A19 bulb with the E26 connector, as shown in FIG. 3. LED bulbs must often fit all required components, including the driver circuit, heat sinks, and LEDs, within the A19 bulb and E26 connector. As such, the size and weight of the driver circuit is a significant design consideration because of the limited volume available in the A19 bulb and E26 connector enclosures. LED bulbs meant as replacements for common lamp bulbs in other countries are also limited to comparable volumes.

The limited space in LED bulbs with common bulb form factors prohibits the use of a conventional thermal protection circuit used in microelectronics. This type of circuit usually includes a temperature sensing device, an amplifier, and a switch to turn off the power to the LED bulb. However, the addition of these components to the LED bulb is difficult due to the limited space of common bulb form factors.

SUMMARY

A first embodiment of a light-emitting diode (LED) bulb has an LED within a shell. The LED bulb also includes a driver circuit for providing current to the LED. The driver

2

circuit has a thermal protection circuit. The driver circuit includes a first thermistor in series with a second thermistor. The first thermistor has a positive thermal coefficient and a first switching temperature. The second thermistor has a positive thermal coefficient and a second switching temperature. The driver circuit also includes a switch-mode power supply (SMPS) controller with an input pin and an output pin. The thermistors are connected to the input pin. When the first thermistor is at a first operating temperature above the first switching temperature, the thermal protection circuit causes the SMPS controller to produce a signal with a first duty cycle on the output pin. When the second thermistor is at a second operating temperature above the second switching temperature, the thermal protection circuit causes the SMPS controller to produce a signal with the first duty cycle on the output pin. When the first thermistor is at a third operating temperature below the first switching temperature and the second thermistor is at a fourth operating temperature below the second switching temperature, the SMPS controller produces a signal with a second duty cycle on the output pin.

A first embodiment of a driver circuit provides current to an LED. The driver circuit has a thermal protection circuit, which includes a first thermistor and a second thermistor. The first thermistor has a positive thermal coefficient and a first switching temperature. The second thermistor has a positive thermal coefficient and a second switching temperature. The driver circuit includes a switch-mode power supply (SMPS) controller with an input pin and an output pin. The thermistors are connected to the input pin. When the first thermistor is at a first operating temperature above the first switching temperature, the thermal protection circuit causes the SMPS controller to produce a signal with a first duty cycle on the output pin. When the second thermistor is at a second operating temperature above the second switching temperature, the thermal protection circuit causes the SMPS controller to produce a signal with the first duty cycle on the output pin. When the first thermistor is at a third operating temperature below the first switching temperature and the second thermistor is at a fourth operating temperature below the second switching temperature, the thermal protection circuit causes the SMPS controller to produce a signal with a second duty cycle on the output pin.

DESCRIPTION OF THE FIGURES

FIG. 1 depicts a block level schematic of an exemplary driver circuit with a thermal protection circuit.

FIGS. 2A and 2B depict a component level schematic of the exemplary driver circuit with the thermal protection circuit.

FIG. 3 depicts an A19 bulb/shell and E26 connector found in a common light bulb form factor.

FIG. 4 depicts the behavior of thermistors in response to temperature.

FIG. 5 depicts an alternative exemplary driver circuit.

FIG. 6 depicts an exemplary LED bulb with the exemplary driver circuit with the thermal protection circuit.

FIG. 7 depicts an alternative exemplary driver circuit using two thermistors.

DETAILED DESCRIPTION

The following description is presented to enable a person of ordinary skill in the art to make and use the various embodiments. Descriptions of specific devices, techniques, and applications are provided only as examples. Various modifications to the examples described herein will be readily

apparent to those of ordinary skill in the art, and the general principles defined herein may be applied to other examples and applications without departing from the spirit and scope of the various embodiments. Thus, the various embodiments are not intended to be limited to the examples described herein and shown, but are to be accorded the scope consistent with the claims.

FIG. 1 depicts a functional level diagram of exemplary driver circuit 100 utilizing a thermal shutdown circuit. Driver circuit 100 may be used in an LED bulb to power one or more LEDs 116. As an input, driver circuit 100 takes an input line voltage (e.g., 120V AC, 60 Hz in the U.S.) at input 102. As an output, driver circuit 100 produces an output current suitable for powering LEDs 116 connected to output 104.

As will be described in more detail below, driver circuit 100 includes input protection circuit 106, input filter circuit 108, switched mode power supply (SMPS) circuit 110, thermal protection circuit 112, and power factor control circuit 114. Input protection circuit 106 is configured to protect driver circuit 100 and LEDs 116 from damage due to voltage spikes in the input line voltage or to prevent electrical shorts in the LED bulb from damaging the surrounding environment. Input protection circuit 106 is configured to also limit the input current when a switched voltage is first applied to input 102. Input filter circuit 108 is configured to condition the input line voltage for use with SMPS circuit 110, and to prevent noise generated by SMPS circuit 110 from reaching input 102 and affecting other devices connected to the input line voltage. SMPS circuit 110 is configured to convert the input line voltage to a current that is suitable for driving one or more LEDs 116. Thermal shutdown circuit 112 is configured to reduce or eliminate the current being supplied to LEDs 116 in the event that driver circuit 100, LEDs 116, or some other part of the LED bulb reaches a threshold temperature. Power factor control circuit 114 is configured to adjust the current that SMPS circuit 110 supplies to LEDs 116.

It should be recognized that some of the circuit blocks shown in FIG. 1 may be omitted. For example, if an LED bulb naturally operates in its most efficient state, then power factor control circuit 114 may not be necessary. Alternatively, the input protection may take place outside of the LED bulb, and therefore, input protection circuit 106 may not be necessary.

FIGS. 2A and 2B depict a component level schematic of driver circuit 100. The discussion below of the component level schematic lists several ranges, specific values, and part IDs for various components. It should be understood that these are not intended to be limiting. Other components values, parts, and ranges may also be used without deviating from a driver circuit using a thermal protection circuit as described herein. Additionally, while a specific circuit topology is presented in FIGS. 2A and 2B, a person skilled in the art will recognize that other topologies could be used without deviating from a driver circuit using a thermal protection circuit as described herein.

Referring to FIG. 2A, SMPS circuit 110 includes: SMPS controller 220; switching element 242; resistors 238, 240, and 244; diode 246; inductor 248; and capacitor 250. SMPS controller 220 drives the switching speed and duty cycle of switching element 242, which controls the amount of current provided to the LEDs connected between output 104. Pins 220a-220h are input and output pins of SMPS controller 220. In one example, SMPS controller 220 is implemented with an HV9910B controller made by Supertex Inc. If using the HV9910B IC or a similar controller, SMPS controller 220 may operate in either constant off-time or constant frequency mode.

In constant frequency mode (set by connecting resistor 238 between RT pin 220c and ground, the frequency of the output at GATE pin 220d is set by the value of resistor 238. The duty cycle of the output may then be set by resistor 244.

In constant off-time mode (set by connecting RT pin 220c to GATE pin 220d as shown in FIG. 2A), the duty cycle of the output at GATE pin 220d of SMPS controller 220 is set based on the value of resistor 238. The frequency of the output can then be varied with resistor 244. As shown in FIG. 2A, SMPS controller 220 is set for constant off-time mode because RT pin 220c is connected to GATE pin 220d through resistor 238.

The values of the components in SMPS circuit 110 may be selected to provide suitable current to the LEDs connected to output 104, based on, among other factors, the input line voltage, the voltage drop across the LEDs, and the current required to drive the LEDs. For example, resistor 238 may be 300 k Ω , resistor 240 may be 20 Ω , resistor 244 may be 180 m Ω . Capacitor 222 is a hold-up capacitor to maintain VDD during switching, and may be 1 μ F. Switching element 242 may be selected to operate properly with the operating range of SMPS controller 220 and to provide sufficient current for the LEDs. Switching element 242 may be an IRFR320PBF HEXFET Power MOSFET from International Rectifier. Diode 246 provides a current path for the current stored in inductor 248 to be supplied to the LEDs when switching element 242 is turned off. Diode 246 may be a IDD03SG60C SiC Schottky diode from Infineon Technologies. Capacitor 250 may filter the high frequency noise generated by the capacitance of the windings of inductor 248. Capacitor 250 may be 22 nF. Inductor 248 stores energy to supply current to LEDs connected to output 104 while switching element 242 is switched off. Inductor 248 may be an inductor of about 100 turns of 24 gauge, triple-insulated wire wound around a Magnetics CO55118A2 toroid core.

Referring to FIG. 2B, thermal protection circuit 112 includes transistor 234, thermistor 226, and resistor 224. Thermal protection circuit 112 also uses SMPS controller 220. Transistor 234 may be a BSS123 Power n-channel MOSFET from Weirton Technology. Resistor 224 is a pull-up resistor to ensure that the gate of transistor 234 does not float when thermistor 226 has a high resistance (discussed below). Resistor 224 may be 100 k Ω .

In the present exemplary embodiment, thermistor 226 may be implemented as a positive temperature coefficient (PTC) thermistor. A PTC thermistor behaves as a normal small value resistor at nominal operating temperatures (i.e., the resistance changes slowly as temperature changes). However, once the operating temperature passes a switching temperature (T_s), the resistance of the PTC thermistor increases rapidly with increasing temperature. This effect is depicted by the resistance versus temperature curves for three PTC thermistors in FIG. 4.

The switching temperature may be selected depending on the recommended operating temperature for the LED bulb. For example, in the present exemplary embodiment, a PTC thermistor with a switching temperature of about 100 $^{\circ}$ C. may be appropriate. Alternatively, lower or higher switching temperatures may be desirable depending on the recommended operating temperature for the component that is being monitored. For example, the driver circuit of an LED bulb may be able to operate at a higher temperature than the LEDs. Therefore, a thermistor near the driver circuit may have a higher switching temperature than a thermistor on heat sinks attached to the LEDs.

Two or more thermistors may also be used to monitor multiple locations in the LED light bulb. For example, in FIG. 7 thermistor 227 with a switching temperature of 120 $^{\circ}$ C. may

be placed on the driver circuit and thermistor **225** with a switching temperature of 90° C. may be placed on the LED heat sink. If the two thermistors are connected in series, then while the driver circuit stays below 120° C. and the heat sink stays below 90° C., the series resistance of the two thermistors will remain low. However, if the driver circuit temperature rises above 120° C. or the heat sink temperature rises above 90° C., then the series resistance of the two thermistors will increase exponentially.

While thermal protection circuit **112** of driver circuit **100** uses a PTC thermistor, other temperature-sensitive components may also be used. For example, a negative temperature coefficient thermistor or a temperature-sensitive diode could be used if the topology of thermal protection circuit **112** is modified to modulate SMPS controller **220**'s switching characteristics in a similar manner as described below.

Thermal protection circuit **112** makes use of linear dimmer (LD) pin **220h** of SMPS controller **220**. The voltage applied to LD pin **220h** may change the timing of the output signal on GATE pin **220d**, which in turn changes the timing of switching element **242**. As the voltage on LD pin **220h** is lowered, the duty cycle (if in constant off-time mode) of the output signal is decreased, which causes switching element **242** to stay in the off-state for a longer portion of each switching cycle. The longer that switching element **242** is off during each switching cycle, the less current that is delivered to the LEDs that are connected across output **104**, which causes the output of the LEDs to dim. If a zero voltage is applied to LD pin **220h**, the duty cycle will drop to zero and no current will be delivered to output **104** and any connected LEDs will be turned off.

In a different implementation of SMPS controller **220**, LD pin **220h** starts to reduce the duty cycle of switching element **242** only when the voltage applied to LD pin **220h** drops below a threshold value. In this example, changes in the voltage applied to LD pin **220h** will not affect the duty cycle of switching element **242** if the voltage at LD pin **220h** remains above the threshold value. However, if the voltage applied to LD pin **220h** drops below the threshold value, then SMPS controller **220** will reduce the duty cycle as discussed in the previous paragraph.

In the above explanation of the operation of LD pin **220h** to reduce the driver circuit output current and dim the LEDs, SMPS controller **220** was assumed to be in constant off-time mode. If SMPS controller **220** is instead in constant frequency mode, then LD pin **220h** will operate in a similar fashion, except instead of modulating the duty cycle of the output signal, the frequency of the output signal will change.

Referring back to exemplary driver circuit **100** of FIGS. 2A and 2B, at operating temperatures below the recommended operating temperature, thermistor **226** is a low-value resistor, which holds the gate terminal of transistor **234** low. With transistor **234** turned off, SMPS controller **220** internally pulls LD pin **220h** high. Thus, the low resistance of thermistor **226** causes GATE pin **220d** to drive switching element **214** at the nominal duty cycle.

However, as the operating temperature of the LED bulb increases, thermistor **226** becomes a high-value resistor, which turns on transistor **234** as the gate terminal is biased through resistor **224** by VDD pin **220g** of SMPS controller **220**. As transistor **234** turns on, it pulls LD pin **220h** lower. Once transistor **234** pulls LD pin **220h** below some threshold value, further decreases in the voltage on LD pin **220h** will cause SMPS controller **220** to reduce the duty cycle (if SMPS controller **220** is configured for constant off-time mode) on GATE pin **220d**, which in turn reduces the duty cycle of switching element **242**. Thus, the high resistance of ther-

mistor **226** causes switching element **242** to operate at a duty cycle smaller than the nominal duty cycle.

The less time that switching element **242** is in the on-state, the less current that is delivered to output **104** and the output light of the LED bulb decreases. As the current provided by the driver circuit decreases and the output light of the LED bulb decreases, the operating temperature decreases as well.

Optionally, a filter in the form of capacitor **222** may be connected to the gate of transistor **234** to provide a time lag for the biasing of LD pin **220h** by transistor **234**. The time lag may prevent the system from unstable or erratic behavior caused by small variations in the voltage on LD pin **220h**. Capacitor **222** may be 4.7 uF.

Referring back to FIG. 2A, input protection circuit **106** includes fuse **200** that protects against short circuits in the rest of the driver circuit or LEDs and varistor **202** that protects against voltage spikes in the input line voltage. For example, fuse **200** may be a 250 mA slow blow micro fuse and varistor may be a 240V-rated metal oxide varistor.

Input filter circuit **108** includes: capacitors **204**, **210**, **214**, and **218**; inductors **208** and **216**; resistor **206**; and bridge rectifier **212**. Components for input filter circuit **108** should be selected to properly condition the input line voltage for use with SMPS circuit **110** and to prevent noise from SMPS circuit **110** from reaching input **102** and affecting other devices connected to the input line.

For example, if driver circuit **100** is connected to a 120V AC, 60 Hz input line voltage, bridge rectifier **212** may be a 400V diode bridge rectifier. Capacitor **204** may be selected to suppress high frequencies generated by SMPS circuit **110** and may be 2.2 nF. Inductors **208** and **216** may be 1-2 mH inductors or more specifically, about 200 turns of 36 gauge wires wound around a Magnetics CO58028A2 toroid core. The damping network of resistor **210** and capacitor **206** may help minimize ringing of driver circuit **100** when input **102** is connected to the input line voltage through a residential dimmer. Resistor **210** may be 120Ω and capacitor **206** may be 680 nF. Filter capacitors **214** and **218** may be 100 nF.

Referring again to FIG. 2B, power factor control circuit **114** may include resistors **232** and **236**, which feed a signal representative of the current being supplied to LEDs connected to output **104**. Based on this signal, SMPS controller **220** may adjust the timing of switching element **242**, which modifies the current being supplied to output **104**. Resistors **232** and **236** may be 1.5 kΩ and 1 MΩ, respectively.

FIG. 5 depicts alternative exemplary driver circuit **500**. Driver circuit **500** is similar to driver **100** (FIG. 1) except driver circuit **500** does not include power factor control circuit **114** (FIG. 2B) or capacitor **222** (FIG. 2B) of temperature protection circuit **112** (FIG. 2B).

FIG. 6 depicts an exemplary LED bulb **600** with shell **602** and base **604**. The LED bulb contains LEDs **606**, heat sink **608**, and driver circuit **610**. In exemplary LED bulb **600**, driver circuit **610** may be the driver circuit discussed above with respect to FIGS. 2A and 2B and is substantially contained within **604** base. In this context, substantially contained means that the majority of the driver circuit is within base **604** but parts of the driver circuit components may be protruding from base **604**. For example, the top part of inductor **612** may protrude above base **604** into heat sink **608** or shell **602** if the shell is connected directly to base **604**. Additionally, substantially contained also means that one or more thermistors or other temperature-sensitive components may be located outside of base **604** if temperatures at locations other than drive circuit **610** are to be monitored. For example, one thermistor may be located on driver circuit **610** in base **604**, while a second thermistor may be located on heat sink

608 or within shell 602. In this example, driver circuit 610 is still substantially contained in base 604.

Although a feature may appear to be described in connection with a particular embodiment, one skilled in the art would recognize that various features of the described embodiments may be combined. Moreover, aspects described in connection with an embodiment may stand alone.

What is claimed is:

1. A light-emitting diode (LED) bulb comprising:

a shell;

an LED contained within the shell;

a heat sink for dissipating heat generated by the LED;

a driver circuit for providing current to the LED, the driver circuit having a thermal protection circuit that comprises:

a first thermistor configured to have a first switching temperature;

a second thermistor configured to have a second switching temperature, wherein the second thermistor is connected in series with the first thermistor; a first resistor; a switch-mode power supply (SMPS) controller having an input pin and an output gate pin, wherein the first thermistor is connected to the input pin and the first resistor is connected to the output gate pin, wherein, when the first thermistor is at a first operating temperature above the first switching temperature, the first thermistor is configured to cause the input pin of the SMPS controller to be at or below a first voltage,

wherein, when the second thermistor is at a second operating temperature above the second switching temperature, the second thermistor is configured to cause the input pin of the SMPS controller to be at or below the first voltage,

wherein, when the first thermistor is at a third operating temperature below the first switching temperature and the second thermistor is at a fourth operating temperature below the second switching temperature, the first thermistor and the second thermistor are configured to cause the input pin of the SMPS controller to be at or above a second voltage, wherein the second voltage is higher than the first voltage,

wherein, when the input pin is at or below the first voltage, the SMPS controller is configured to supply a first signal with a first duty cycle on the output gate pin, and

wherein, when the input pin is at or above the second voltage, the SMPS controller is configured to supply a second signal with a second duty cycle on the output gate pin, and

wherein the second duty cycle is higher than the first duty cycle; and

a base attached to the shell for connecting the LED bulb to an electrical socket.

2. The LED bulb of claim 1, wherein the first switching temperature is different than the second switching temperature.

3. The LED bulb of claim 2, wherein the first thermistor is located adjacent to the heat sink, and wherein the second thermistor is located adjacent to the driver circuit.

4. The LED bulb of claim 3, wherein the first switching temperature is lower than the second switching temperature.

5. The LED bulb of claim 4, wherein the first thermistor is a first positive temperature coefficient thermistor and the second thermistor is a second positive temperature coefficient thermistor.

6. The LED bulb of claim 3, wherein the driver circuit substantially fits within the base.

7. The LED bulb of claim 3, wherein the thermal protection circuit further comprises:

a MOS transistor having a gate terminal connected to the first thermistor and a drain or a source terminal connected to the input pin.

8. The LED bulb of claim 7, wherein the first switching temperature is lower than the second switching temperature.

9. The LED bulb of claim 7, wherein the thermal protection circuit further comprises:

a filter connected to the gate terminal of the MOS transistor.

10. The LED bulb of claim 9, wherein the filter comprises a second resistor and a capacitor.

11. The LED bulb of claim 1, wherein the driver circuit further comprises:

an input filter connected to the SMPS controller, wherein the input filter is configured to accept an alternating current (AC) input and the input filter is configured to produce a rectified output, and wherein the input filter is configured to be electrically connected to the base.

12. The LED bulb of claim 11, wherein the second switching temperature is different than the first switching temperature.

13. The LED bulb of claim 1 further comprising:

an input filter connected to the SMPS controller, wherein the input filter is configured to accept an alternating current (AC) input and the input filter is configured to produce a rectified output.

14. The LED bulb of claim 13, wherein the first thermistor is located adjacent to the heat sink, and wherein the second thermistor is located adjacent to the driver circuit.

15. The LED bulb of claim 14, wherein the first switching temperature is lower than the second switching temperature.

16. A thermal protection circuit for a light-emitting diode (LED) bulb, the circuit comprising:

a first thermistor configured to have a first switching temperature;

a second thermistor configured to have a second switching temperature, wherein the second thermistor is connected in series with the first thermistor; a resistor; and a switch-mode power supply (SMPS) controller having an input pin and an output gate pin, wherein the first thermistor is connected to the input pin and the resistor is connected to the output gate pin, wherein, when the first thermistor is at a first operating temperature above the first switching temperature, the first thermistor is configured to cause the input pin of the SMPS controller to be at or below a first voltage,

wherein, when the second thermistor is at a second operating temperature above the second switching temperature, the second thermistor is configured to cause the input pin of the SMPS controller to be at or below the first voltage,

wherein, when the first thermistor is at a third operating temperature below the first switching temperature and the second thermistor is at a fourth operating temperature below the second switching temperature, the first thermistor and the second thermistor are configured to cause the input pin of the SMPS controller to be at or above a second voltage, wherein the second voltage is higher than the first voltage,

wherein, when the input pin is at or below the first voltage, the SMPS controller is configured to supply a first signal with a first duty cycle on the output gate pin, and

9

wherein, when the input pin is at or above the second voltage, the SMPS controller is configured to supply a second signal with a second duty cycle on the output gate pin, and wherein the second duty cycle is higher than the first duty cycle.

17. The circuit of claim 16, wherein the first switching temperature is different than the second switching temperature.

18. The circuit of claim 17, wherein the first thermistor is located adjacent to a heat sink, and wherein the second thermistor is located adjacent to a driver circuit.

19. The circuit of claim 18, wherein the first switching temperature is lower than the second switching temperature.

20. The circuit of claim 19, wherein the first thermistor is a first positive temperature coefficient thermistor and the second thermistor is a second positive temperature coefficient thermistor.

10

21. The circuit of claim 17, further comprising a MOS transistor having a gate terminal connected to the first thermistor and a drain or a source terminal connected to the input pin.

22. The circuit of claim 21, further comprising a filter connected to the gate of the MOS transistor.

23. The circuit of claim 16, further comprising a MOS transistor having a gate terminal connected to the first thermistor and a drain or a source terminal connected to the input pin.

24. The circuit of claim 23, further comprising a filter connected to the gate of the MOS transistor.

25. The circuit of claim 16, further comprising an input filter connected to the SMPS controller, wherein the input filter is configured to accept an alternating current (AC) input and the input filter is configured to produce a rectified output, and wherein the input filter is configured to be electrically connected to a base.

* * * * *