US008564214B2

(12) **United States Patent**
Briggs

(10) **Patent No.: US 8,564,214 B2**
(45) **Date of Patent: Oct. 22, 2013**

(54) **CIRCUITS FOR SENSING CURRENT LEVELS WITHIN LIGHTING APPARATUS**

(75) Inventor: **Gerald Edward Briggs**, Ottawa (CA)

(73) Assignee: **Arkalumen Inc.**, Ottawa (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 265 days.

(21) Appl. No.: **13/104,919**

(22) Filed: **May 10, 2011**

(65) **Prior Publication Data**

US 2011/0279048 A1 Nov. 17, 2011

Related U.S. Application Data

(60) Provisional application No. 61/333,746, filed on May 11, 2010.

(51) **Int. Cl.**
H05B 37/02 (2006.01)

(52) **U.S. Cl.**
USPC ..... **315/209 R**; 315/193

(58) **Field of Classification Search**
USPC ..... 315/209 R, 193, 185 R, 291, 295, 297, 315/299, 302
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,593,234	A	6/1986	Yang	
5,006,782	A	4/1991	Pelly	
5,237,264	A	8/1993	Moseley et al.	
5,248,919	A	9/1993	Hanna et al.	
5,783,909	A	7/1998	Hochstein	
5,803,579	A	9/1998	Turnbull et al.	
5,932,995	A	8/1999	Wagoner	
5,949,539	A	9/1999	Britton, Jr. et al.	
6,175,195	B1	1/2001	Janczak et al.	
6,198,230	B1	3/2001	Leeb et al.	
6,222,352	B1	4/2001	Lenk	
6,351,079	B1	2/2002	Willis	
6,400,482	B1	6/2002	Lupton et al.	
6,426,599	B1	7/2002	Leeb	
6,504,633	B1	1/2003	Hovorka et al.	
6,548,967	B1	4/2003	Dowling et al.	
6,596,977	B2	7/2003	Muthu et al.	
6,621,235	B2	9/2003	Chang	
6,794,831	B2	9/2004	Leeb et al.	
6,853,150	B2	2/2005	Clauberg et al.	
6,954,591	B2	10/2005	Lupton et al.	
7,016,115	B1	3/2006	Leeb et al.	
7,141,779	B1	11/2006	Chew et al.	
7,321,203	B2	1/2008	Marosek	
7,457,089	B2 *	11/2008	Ohshima	361/86
7,486,032	B2	2/2009	Lee	
7,495,425	B2	2/2009	Friedrich	
7,498,754	B2	3/2009	Masood	
7,511,463	B2	3/2009	Kumar	


(Continued)

Primary Examiner — Daniel D Chang
(74) *Attorney, Agent, or Firm* — Sean Murray; Murray IP Consulting Inc.

(57) **ABSTRACT**

Circuits for sensing current levels within an apparatus are disclosed. In specific cases, a constant voltage power supply is used to power an LED lighting apparatus in which there are uncertainties within the forward voltages of the LEDs, which in turn creates uncertainty with respect to the current level flowing through the LEDs. To manage these uncertainties, the current flowing through the LEDs is measured by determining a voltage level across a known resistor and calculating the current level. To prevent the known resistor from causing a significant reduction in the efficiency of the overall light engine, the circuit includes one or more transistors in parallel with the known resistor to reduce the effective resistance in the LED circuit during times that the current is not being sensed.

18 Claims, 8 Drawing Sheets

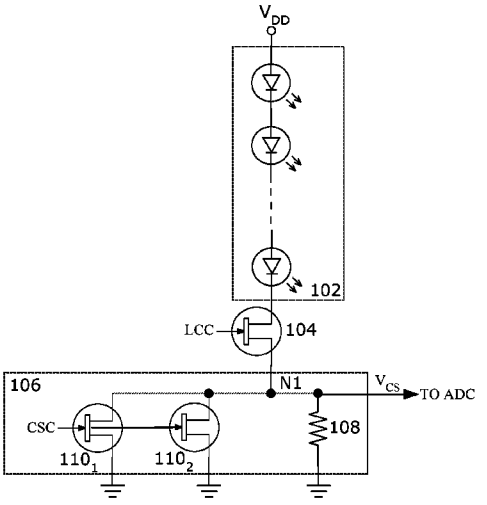

Current Lighting
EX1017
Page 1 of 17

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,649,326	B2	1/2010	Johnson et al.	
7,683,504	B2	3/2010	Blair et al.	
7,750,616	B2	7/2010	Liu	
7,759,881	B1	7/2010	Melanson	
8,358,085	B2	1/2013	Catalano et al.	
2004/0263093	A1	12/2004	Matsubayashi et al.	
2005/0127888	A1	6/2005	Marschalkowski et al.	
2005/0225264	A1	10/2005	Kemp	
2005/0269580	A1	12/2005	D'Angelo	
2006/0113975	A1	6/2006	Mednik et al.	
2006/0239689	A1	10/2006	Ashdown	
2007/0103086	A1	5/2007	Neudorf et al.	
2007/0103832	A1*	5/2007	Ohshima	361/93.1
2007/0159421	A1	7/2007	Peker et al.	
2007/0182338	A1	8/2007	Shteynberg et al.	
2007/0195552	A1	8/2007	Park	
2007/0229047	A1	10/2007	Sigamani et al.	
2007/0268028	A1*	11/2007	Moyer et al.	324/713
2007/0278974	A1	12/2007	Van De Ven	
2008/0079705	A1	4/2008	Yang et al.	
2008/0138085	A1	6/2008	Lin et al.	
2008/0150449	A1	6/2008	Wang et al.	
2008/0191642	A1	8/2008	Slot et al.	
2008/0224636	A1	9/2008	Melanson	
2008/0252664	A1	10/2008	Huang et al.	
2009/0096392	A1	4/2009	Chandran et al.	
2009/0134817	A1	5/2009	Jurngwirth et al.	
2009/0174337	A1	7/2009	Miskin et al.	
2009/0251059	A1	10/2009	Veltman	
2009/0251071	A1	10/2009	Gater et al.	
2009/0322252	A1	12/2009	Shiu et al.	
2010/0033146	A1	2/2010	Irissou et al.	
2010/0060187	A1	3/2010	Newman et al.	
2010/0066266	A1	3/2010	Huang et al.	
2010/0072899	A1	3/2010	Engstrand	
2010/0079124	A1	4/2010	Melanson	
2010/0102230	A1	4/2010	Chang et al.	
2010/0164406	A1	7/2010	Kost et al.	
2010/0171429	A1	7/2010	Garcia et al.	
2010/0171442	A1	7/2010	Draper et al.	
2010/0277075	A1	11/2010	Rees	
2010/0289424	A1	11/2010	Chang et al.	
2010/0320936	A1	12/2010	Yao	
2010/0320939	A1	12/2010	Lai	
2011/0006691	A1	1/2011	Blaha et al.	
2011/0050130	A1	3/2011	Rudolph	
2011/0115394	A1	5/2011	Shteynberg et al.	
2011/0115412	A1	5/2011	Welten	
2011/0298386	A1*	12/2011	Corradi	315/224

* cited by examiner

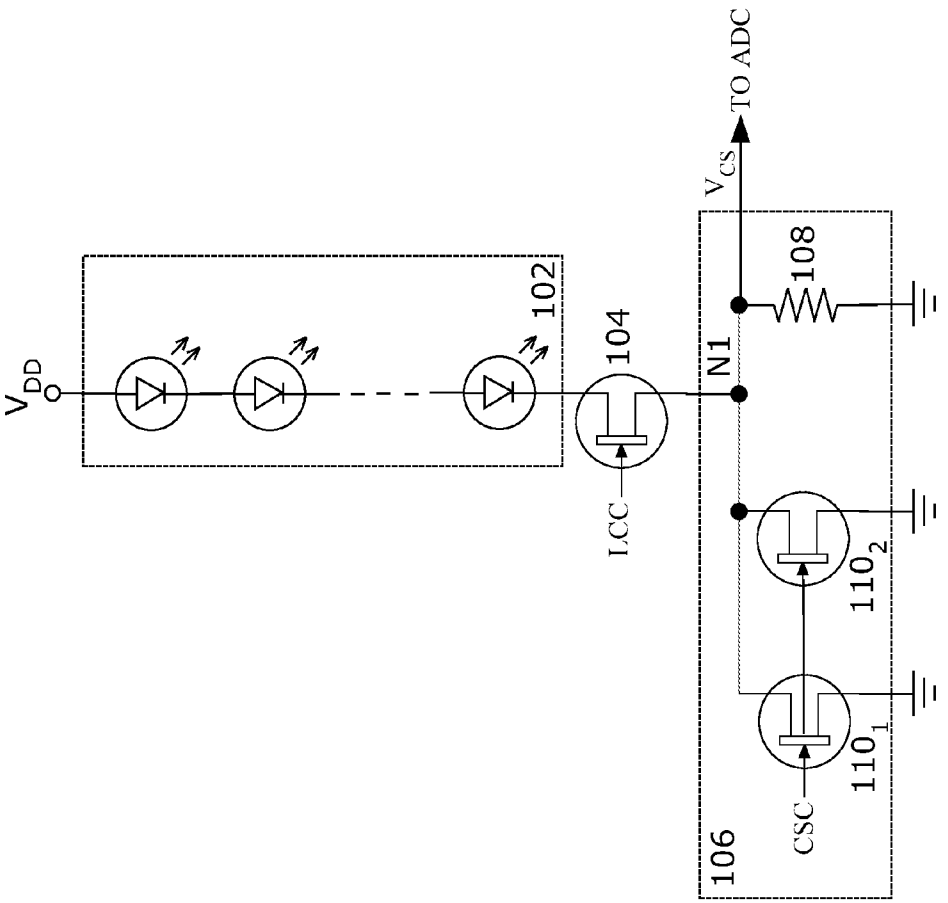


FIGURE 1

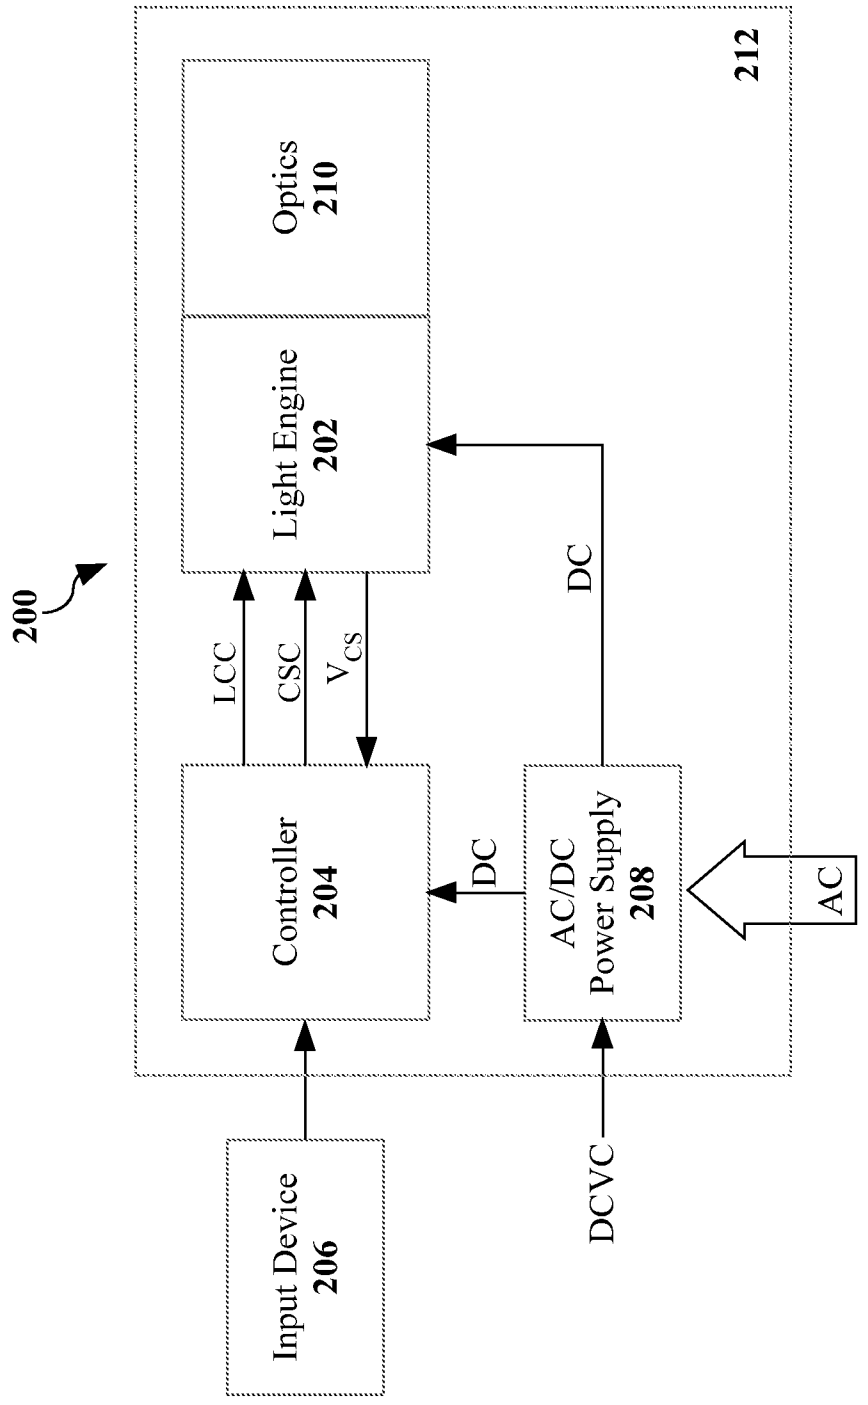

200
212
Optics
210
Light Engine
202
LCC
CSC
V_{CS}
DC
Controller
204
DC
AC/DC
Power Supply
208
AC
Input Device
206
DCVC

FIGURE 2A

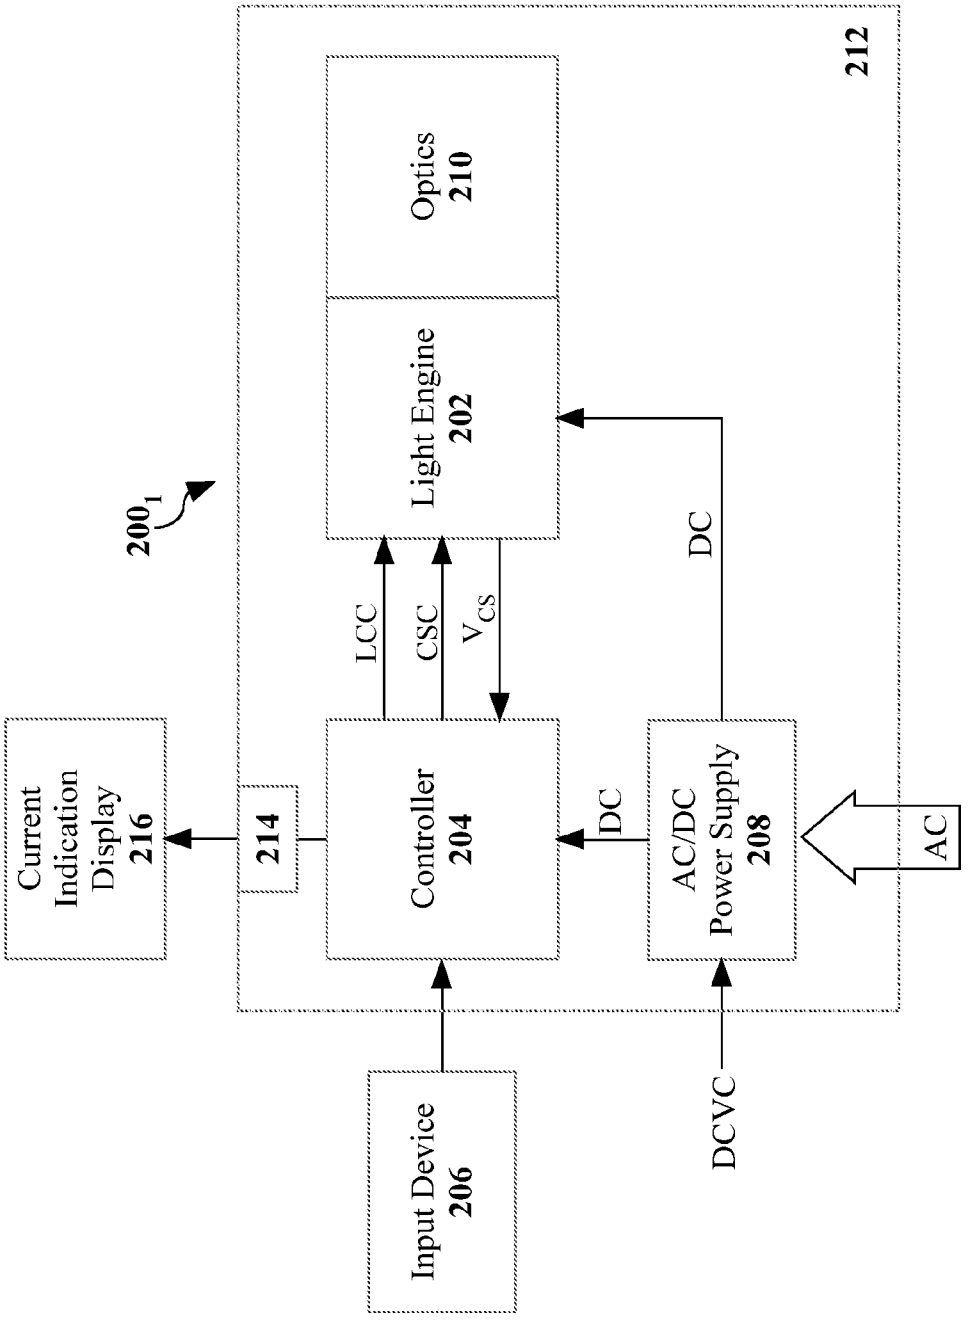

212
Optics
210
Light Engine
202
200_1
LCC
CSC
V_{CS}
DC
Current
Indication
Display
216
214
Controller
204
DC
AC/DC
Power Supply
208
AC
Input Device
206
DCVC

FIGURE 2B

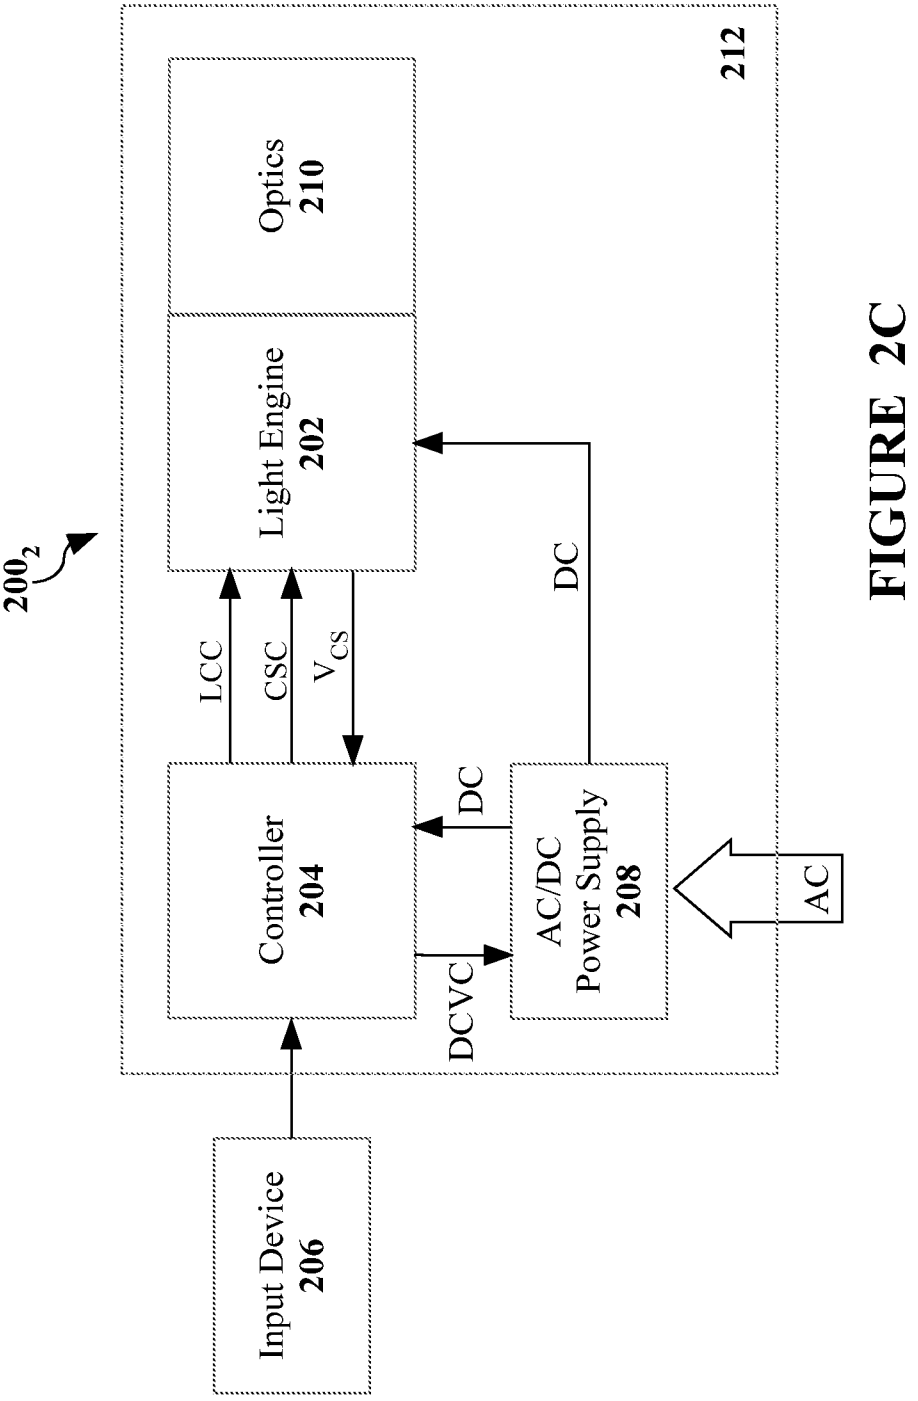

200_2
212
Optics
210
Light Engine
202
LCC
CSC
V_{CS}
DC
Controller
204
DC
AC/DC
Power Supply
208
AC
DCVC
Input Device
206

FIGURE 2C

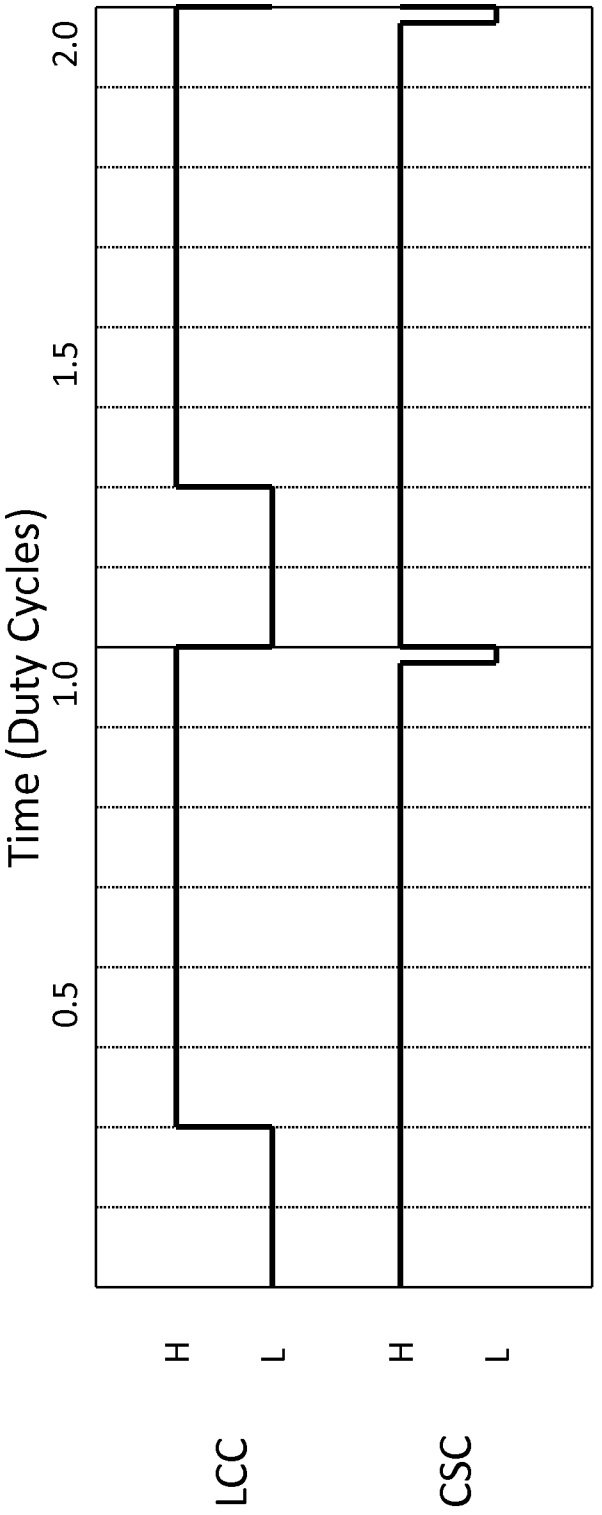


FIGURE 3

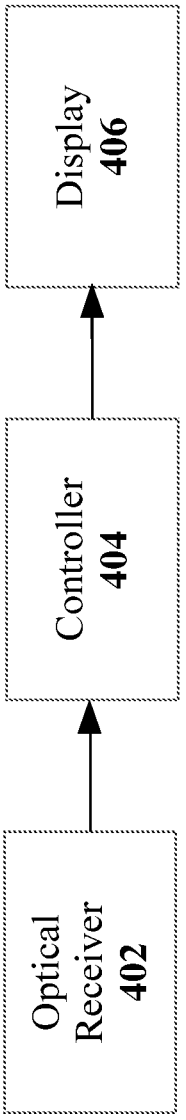


FIGURE 4A

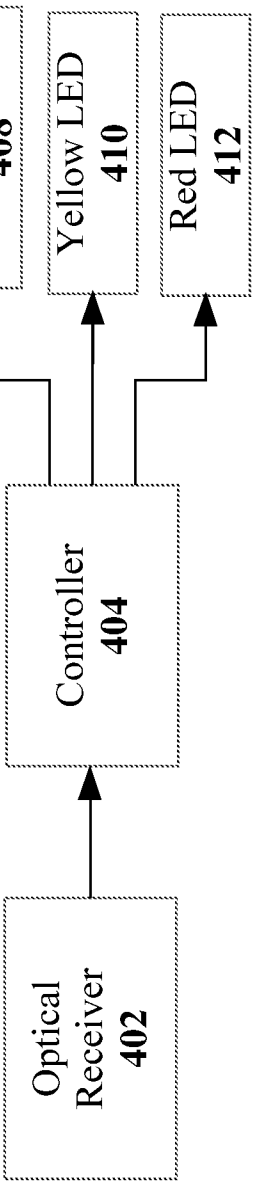


FIGURE 4B

FIGURE 5A

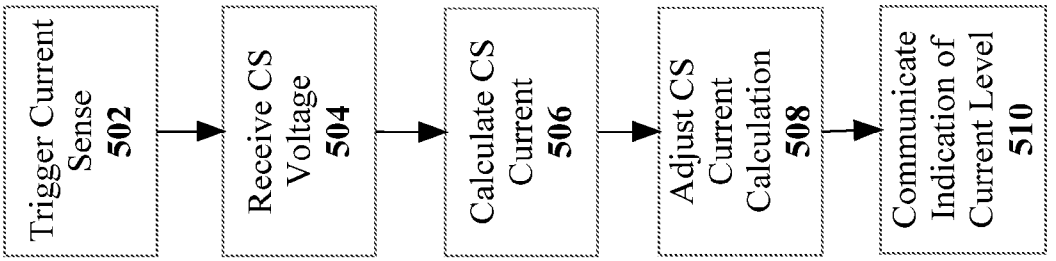
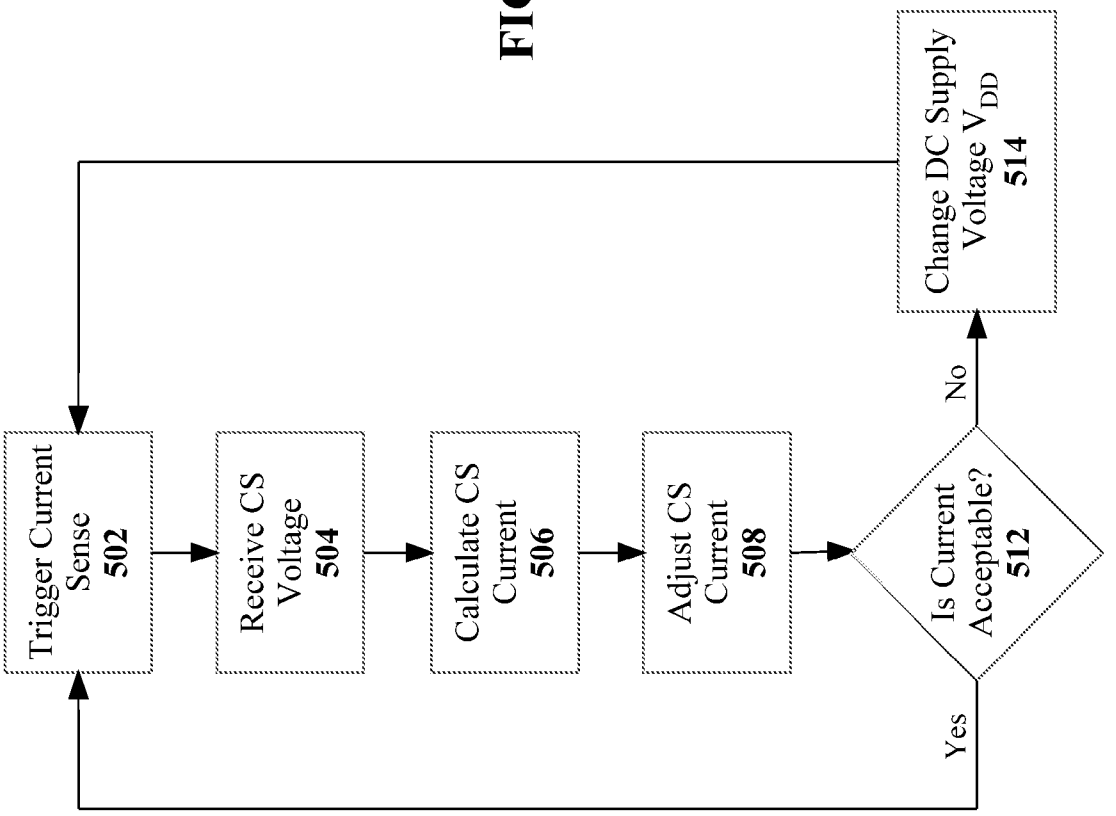

Trigger Current Sense 502
Receive CS Voltage 504
Calculate CS Current 506
Adjust CS Current Calculation 508
Communicate Indication of Current Level 510

FIGURE 5B


Trigger Current Sense 502
Receive CS Voltage 504
Calculate CS Current 506
Adjust CS Current 508
Is Current Acceptable? 512
Yes
No
Change DC Supply Voltage V_{DD} 514

CIRCUITS FOR SENSING CURRENT LEVELS WITHIN LIGHTING APPARATUS

CROSS-REFERENCE TO RELATED APPLICATION

The present application claims the benefit under 35 USC 119(*e*) of U.S. Provisional Patent Application 61/333,746 filed on May 11, 2010 and hereby incorporated by reference herein.

FIELD OF THE INVENTION

The invention relates generally to lighting apparatus and, more particularly, to circuits for sensing current levels within lighting apparatus.

BACKGROUND

Light Emitting Diodes (LEDs) are increasingly being adopted as general illumination lighting sources due to their high energy efficiency and long service life relative to traditional sources of light such as incandescent, fluorescent and halogen. Each generation of LEDs are providing improvements in energy efficiency and cost per lumen, thus allowing for lighting manufacturers to produce LED light fixtures at increasingly cost competitive prices.

While the component LEDs are increasing in energy efficiency, there are considerable other components within an LED light fixture that cause drains on the overall lumens per Watt achievable within the overall system. For instance, inefficiencies within the optics used and the AC/DC power supply both reduce the overall energy efficiency for the light fixture. Further, operating the LEDs at non-optimal current (amperage) levels can reduce the energy efficiency of the LEDs and therefore the overall light fixture. In fact, if the current flowing through the LEDs exceeds a maximum allowable level, the LEDs may be damaged or permanently burnt out, and thus require replacement.

One issue that arises when managing the current flow through the LEDs is that LEDs are not constant in terms of their forward voltages (voltage drops), or other characteristics such as color/color temperature and brightness. Each LED that is manufactured is generally categorized based on a number of criteria including their forward voltage, this categorization being based on bin codes and therefore called "binning" In manufacturing light fixtures with LEDs, the developer will generally want a consistent light output from each of its "identical" light fixtures. To do this, the manufacturer will select the binning of its LEDs to be consistent. A problem that arises is that the more narrow the binning criteria provided by the developer, the higher prices that are typically charged for the LEDs. On the other hand, it becomes difficult to design a circuit for the LEDs if the uncertainty related to the forward voltages of the LEDs is significant.

In some architectures, the LED light fixtures are powered with a constant current power supply that can be locked to a particular current through a feedback control system using an inductor. In this architecture, the control system can manage differences in forward voltages within the LEDs within a predefined limit.

In other architectures, a constant voltage power supply is used and the current to flow through the LEDs is controlled by the voltage output from the voltage power supply and the impedances within the circuit. In this case, differences in forward voltages across LEDs within different light fixtures can make a significant difference in the current flowing through the LEDs. Further, the voltage output from the constant voltage power supply may be adjustable and adjustments in the voltage supply can further change the current flowing through the LEDs.

Against this background, there is a need for solutions that will mitigate at least one of the above problems and, in particular, to enable monitoring and/or control of the current flowing through the LEDs while not materially decreasing the efficiency of the system.

SUMMARY OF THE INVENTION

According to a first broad aspect, the invention seeks to provide a circuit comprising at least one component and a current sense circuit. The at least one component is coupled between a supply voltage and a node while the current sense circuit is coupled between the node and a reference ground. The current sense circuit comprises a resistor coupled in parallel with at least one transistor, the at least one transistor being activated during a first state and being deactivated during a second state. The node is coupled to a current determination apparatus operable to determine a current flowing through the at least one component during the second state using a voltage sensed at the node.

In some embodiments, the at least one component comprises at least one light emitting diode (LED) and a light control transistor coupled in series with the at least one LED. The light control transistor is activated for a time period set for the at least one LED to be activated within a duty cycle. The at least one transistor within the current sense circuit is within the second state during the time period set for the at least one LED to be activated within the duty cycle. Further, in embodiments of the present invention a resistance of the current sense circuit is at a first value during the first state and a second value higher than the first value during the second state.

According to a second broad aspect, the invention seeks to provide an apparatus incorporating a circuit according to the first broad aspect. The apparatus further comprises the current determination apparatus. In some embodiments, in order to determine a current flowing through the at least one component during the second state, the current determination apparatus is operable to sense a voltage at the node during the second state and to divide the sensed voltage by a resistance of the resistor within the current sense circuit. In some embodiments, the current determination apparatus is further operable to determine a current flowing through the at least one component during the first state by compensating the determined current flowing through the at least one component during the second state by the change in resistance within the current sense circuit between the first and second states.

According to a third broad aspect, the invention seeks to provide a circuit comprising at least one component and a current sense circuit. The at least one component is coupled between a node and a reference ground while the current sense circuit is coupled between a supply voltage and the node. The current sense circuit comprises a resistor coupled in parallel with at least one transistor, the at least one transistor being activated during a first state and being deactivated during a second state. The node is coupled to a current determination apparatus operable to determine a current flowing through the at least one component during the second state using a voltage sensed at the node.

These and other aspects of the invention will become apparent to those of ordinary skill in the art upon review of the

following description of certain embodiments of the invention in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of embodiments of the invention is provided herein below, by way of example only, with reference to the accompanying drawings, in which:

FIG. **1** is an electrical circuit diagram of a light engine according to one embodiment of the present invention;

FIGS. **2**A, **2**B and **2**C are logical block diagrams of an LED lighting apparatus according to first, second and third embodiments of the present invention respectively;

FIG. **3** is a signal flow diagram for a sample duty cycle for a light channel control (LCC) and current sense control (CSC) signals according to a particular example implementation of the present invention;

FIGS. **4**A and **4**B are logical block diagrams of a current level display apparatus according to particular example implementations of the present invention in which the LED lighting apparatus of FIG. **2**A communicates information optically; and

FIGS. **5**A and **5**B are flow charts illustrating steps of a control algorithm performed by a controller within the LED lighting apparatus of one of FIGS. **2**A, **2**B and **2**C according to two embodiments of the present invention.

It is to be expressly understood that the description and drawings are only for the purpose of illustration of certain embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

The present invention is directed to circuits for sensing current levels within apparatus. In embodiments of the present invention, a constant voltage power supply is used to power an LED lighting apparatus in which there are uncertainties within the forward voltages of the LEDs, which in turn creates uncertainty with respect to the current level flowing through the LEDs. To manage these uncertainties, the current flowing through the LEDs is measured by determining a voltage level across a known resistor and calculating the current level. To prevent the known resistor from causing a significant reduction in the efficiency of the overall light engine, the circuit includes one or more transistors in parallel with the known resistor to reduce the effective resistance in the LED circuit during times that the current is not being sensed.

FIG. **1** is an electrical circuit diagram of a light engine according to one embodiment of the present invention. As shown, the circuit of FIG. **1** comprises a plurality of LEDs **102** coupled in series with a channel control transistor **104** and a current sense circuit **106** between a supply voltage V_{DD} and a reference ground. The current sense circuit **106** comprises a current sense resistor **108** with a resistance R_A coupled in parallel with two current sense control transistors $\mathbf{110}_1$, $\mathbf{110}_2$ between the channel control transistor **104** and the reference ground.

The channel control transistor **104** is controlled by a Light Channel Control (LCC) signal at its gate/base which dictates when current flows through the LEDs. The LCC signal would generally be a Pulse Width Modulation (PWM) signal that is high and low for periods of time within a duty cycle. The ratio of the time that the LCC signal is high relative to the time that the LCC signal is low dictates the level of light output that would be visible from the LEDs. In particular, if the LCC signal is fully high, the LEDs will be "on" at all times and therefore will project lumens of light 100% of the time. On the other hand, if the LCC signal is 50% high and 50% low, the LEDs will be "on" half the time and therefore the LEDs will dimmed by 50% from the full "on" state. It should be understood that other levels of dimming could be performed by controlling the LCC signal. In some embodiments, the channel control transistor **104** could be removed. In this case, the LEDs **102** would be directly coupled to the current sense circuit **106** and would be always on when the supply voltage is applied.

According to embodiments of the present invention, there are instances that may require a determination of the current flowing through the LEDs **102**. The current sense circuit **106** as shown in FIG. **1** is designed to allow for a current sense voltage V_{CS} to be sensed while not substantially decreasing the efficiency of the overall circuit during a substantial portion of the duty cycle of operation. As shown in FIG. **1**, the current sense voltage V_{CS} is being sensed at a node **N1** coupled between the channel control transistor **104** and the current sense circuit **106**. It should be understood that other nodes within the circuit of FIG. **1** could be used to provide a sensed voltage and node **N1** is utilized for simplicity. The current sense voltage V_{CS} will be equal to the resistance R_{CS} of the current sense circuit **106** multiplied by the current flowing through the circuit **106**. Therefore, with knowledge of the resistance R_{CS} of the current sense circuit and measuring the current sense voltage V_{CS}, the current flowing through the circuit **106**, and therefore also the current flowing through the LEDs **102**, can be calculated.

The current sense voltage V_{CS} is detected at an Analog to Digital Convertor (ADC) (not shown) or another circuit which may be used to create an indication of the voltage V_{CS} on node **N1**. To provide an accurate detection of the current sense voltage V_{CS}, it is desired that the signal to noise ratio of the voltage be relatively high. If the resistance R_{CS} across the current sense circuit **106** is substantially low, the voltage V_{CS} will also be low and potentially difficult to accurately detect relative to noise within the circuit. Therefore, to provide an accurate detection of the current sense voltage V_{CS}, it is desirable to have a relatively substantial resistance R_{CS} across the current sense circuit **106**. On the other hand, the resistance R_{CS} across the current sense circuit **106** is a source of power loss and, the higher that the resistance R_{CS} is and therefore the higher the accuracy of the voltage measurement, the lower the energy efficiency of the overall circuit of FIG. **1**. To deal with this issue, the current sense circuit **106**, according to embodiments of the present invention, utilizes the current sense control transistors $\mathbf{110}_1$,$\mathbf{110}_2$ to adjust the resistance R_{CS} across the current sense circuit **106**.

The current sense control transistors $\mathbf{110}_1$,$\mathbf{110}_2$ are controlled by a Current Sense Control (CSC) signal at their gates/bases that dictates the resistance across the current sense circuit **106**. When the CSC signal is low, the transistors $\mathbf{110}_1$,$\mathbf{110}_2$ are off and the resistance R_{CS} across the current sense circuit **106** is equal to the resistance R_A of the current sense resistor **108**. When the CSC signal is high, the transistors $\mathbf{110}_1$,$\mathbf{110}_2$ are on and the resistance R_{CS} across the current sense circuit **106** is:

$$R_{CS} = \frac{1}{\frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_A}}$$

where R_1 and R_2 are the resistances of the drain-source or collector-emitter paths of the transistors **110**$_1$,**110**$_2$ respectively when turned on. R_1 and R_2 are also known as the "on resistance" for the transistors **110**$_1$,**110**$_2$ respectively.

In one particular example implementation, the resistance R_A of resistor **108** may be 0.25Ω while the resistances R_1,R_2 may each be 0.025Ω. In this case, the resistance R_{CS} across the current sense circuit **106** when the transistors **110**$_1$,**110**$_2$ are off would be 0.25Ω while the resistance R_{CS} across the current sense circuit **106** when the transistors **110**$_1$,**110**$_2$ are on would be ~0.012Ω. In this example, if the current flowing through the current sense circuit **106** is 4.0 A, the power loss when the transistors **110**$_1$,**110**$_2$ are off would be ~4.0 W while the power loss when the transistors **110**$_1$,**110**$_2$ are on would be ~0.19 W. This difference in power loss can have a significant difference in the overall energy efficiency of the circuit of FIG. **1**.

By normally having the current sense control transistors **110**$_1$,**110**$_2$ on and only turning the transistors **110**$_1$,**110**$_2$ off during a limited time for a current sense operation, the overall power loss from the current sense circuit **106** can be minimized In one implementation, the duty cycle for the circuit of FIG. **1** may be divided into 256 slots. In this case, the intensity of the light output from the circuit can be controlled by adjusting the number of slots in which the LCC signal is high and therefore adjusting the amount of time within the duty cycle that the LEDs **102** are turned on. The time in which the resistance R_{CS} across the current sense circuit **106** is high, and therefore the current sense voltage V_{CS} is desirable for detection, can be controlled by adjusting the number of slots in which the CSC signal is low while the LCC signal is high (since the channel control transistor **104** must be turned on to sense the current flowing through the LEDs **102**). For instance, if the CSC signal is low for a single slot of 256 slots, the current sense voltage V_{CS} will be desirable for detection by the ADC during that slot (as long as the LCC signal is high for that slot).

To ensure that the current sense voltage V_{CS} is in equilibrium and not in a transitional state caused by the turning off of the transistors **110**$_1$,**110**$_2$, in some embodiments, the current sense voltage V_{CS} is measured by the ADC at a later portion of the time that the CSC signal is low. For instance, if a duty cycle is divided into 256 slots and the duty cycle is 1 ms, each slot would comprise ~3.9 μs. In this case, the detection of the current sense voltage V_{CS} may take place 2-3 μs after the transistors **110**$_1$,**110**$_2$ are turned off. Further, in some embodiments, the measuring of the current sense voltage V_{CS} is performed in a plurality of duty cycles and the overall value is determined by averaging the values detected during the individual duty cycles.

FIG. **3** depicts a signal flow diagram for a sample duty cycle for the LCC and CSC signals according to a particular example implementation of the present invention. In this case, the LCC signal is low for the first 25% of the duty cycle and is high for the remaining 75% of the duty cycle. The LEDs **102**, in this case, would be dimmed by 25% and only be on for 75% of the time of the duty cycle. The duty cycle is typically sufficiently short (for example, 1 ms) such that turning on and off of the LEDs **102** is not perceivable by a human eye but instead appears only as an imperceptible reduction in the average light output from the LEDs **102**. As shown in FIG. **3**, the CSC signal is high for the first 31 of 32 duty cycle slots and is low for the final duty cycle slot. In this case, when the CSC signal is low and the LCC signal is high, the current sense voltage V_{CS} is desirable to be detected.

If the values of the resistances R_A, R_1 and R_2 are equal to the sample values 0.25Ω, 0.025Ω and 0.025Ω respectively and the current flowing through the current sense circuit **106** is 4.0 A, then the instantaneous power loss due to the current sense circuit **106** for the slots **9** to **31** of the duty cycle of FIG. **3** when the LCC and CSC signals are high would be ~0.19 W. During the final time slot of the duty cycle of FIG. **3**, the instantaneous power loss due to the current sense circuit **106** would be 4.0 W. Therefore, in this case, over the overall duty cycle, the average power loss due to the current sense circuit **106** would be equal to: ~0.26 W. In the case that the LCC signal is high for the entire duty cycle (i.e. the LEDs are on 100% of the duty cycle), the average power loss due to the current sense circuit **106** would be equal to: ~0.31 W (but would be a lower percentage of total power than the previous ~0.26 W case, even though the raw number is higher). In the sample case in which the duty cycle is divided into 256 slots, the CSC signal is low for only one slot and the LCC signal is high for 100% of the 256 slots, the average power loss due to the current sense circuit would be equal to: ~0.20 W. In all of these examples, the average power loss due to the current sense circuit **106** is substantially below the power loss that would result with the use of only the current sense resistor **108**.

Although depicted with two current sense control transistors **110**$_1$,**110**$_2$, it should be understood that there could be only one current sense control transistor or more than two. The number of current sense transistors used depends upon the desired adjustment in resistance within the current sense circuit **106**. If only a single current sense control transistor is used, the resistance R_{CS} across the current sense circuit **106** when the CSC signal is high will be higher than the case in which two or more similar transistors are used. Using additional current sense transistors will further reduce the resistance R_{CS} across the current sense circuit **106** when the CSC signal is high, therefore reducing the power loss due to the current sense circuit **106** during this time.

Although a plurality of LEDs **102** is depicted in FIG. **1**, it should be understood that the number of LEDs should not limit the scope of the present invention. In particular, the circuit of FIG. **1** could be implemented with one or more LEDs. Further, a plurality of circuits similar to that of FIG. **1** could be implemented within one or more light engine circuits. For instance, each circuit could include a different set of LEDs that are independently controlled by the same or separate LCC signals. This is particularly useful in cases in which the LEDs in each circuit have different aspects, such as color or color temperature. By independently controlling LCC signals for circuits comprising different color/color temperature LEDs, the color/color temperature of the light output from a lighting apparatus can be controlled. The current sense circuit **106** could be implemented within only one of the circuits, a plurality of the circuits or all of the circuits. Further, in some embodiments, the current sense circuit **106** could be shared if two or more of the LED circuits were coupled together at node **N1**. In this case, the LCC signals of the two or more LED circuits could be activated at different times within the duty cycle and the current sense circuit **106** could be activated (by having the CSC signal turn low) during a time when each of the LED circuits were activated.

Although the current sense circuit **106** of FIG. **1** is coupled between the reference ground and the current control transistor **104**, it should be understood that the circuit could be implemented in other variations. For instance, the constant current circuit **106** could be implemented in series between the supply voltage V_{DD} and the LEDs **102**. In this case, the current sense transistors **110**$_1$,**110**$_2$ could be implemented as p-channel transistors, rather than the n-channel transistors depicted in the embodiment of FIG. **1**. The calculation of the

current using such a design would be slightly more complicated as the voltage drop across the current sense circuit would be equal to the supply voltage V_{DD} minus the voltage at the node between the current sense circuit and the LEDs **102**. An apparatus that is to calculate the current flowing through the current sense circuit would therefore need to have knowledge of the current supply voltage V_{DD} in order to accurately calculate the current.

FIGS. **2**A, **2**B and **2**C are logical block diagrams of LED lighting apparatus according to first, second and third embodiments of the present invention respectively. As depicted in FIG. **2**A, the LED lighting apparatus **200** comprises a number of distinct components that together enable the lighting apparatus **200** to output light. The LED lighting apparatus **200** comprises a light engine **202** which comprises a circuit with LEDs that emit light when activated, the light engine **202** in some embodiments comprising the circuit of FIG. **1**; a controller **204** that outputs control signals (the LCC and CSC signals) to the light engine **202** and detects the current sense voltage V_{CS} on the light engine **202**; an input device **206** used by a user of the lighting apparatus **200** to select aspects of the light output such as the intensity, color and/or color temperature; and an AC/DC power supply **208** that receives AC power from the power grid (not shown) and provides DC power to the controller **204** and the light engine **202**. As shown in FIG. **2**A, the lighting apparatus **200** further comprises an optics element **210** that diffuses the light output from the LEDs. A thermal element (not shown) would also be included within the lighting apparatus **200** to remove heat generated by the LEDs in order to enable them to operate at an acceptable temperature. In this particular embodiment, the lighting apparatus **200** further comprises an encasement **212** that provides protective structure and artistic design to the lighting apparatus **200**. In this case, the encasement **212** encases the light engine **202**, the controller **204**, the AC/DC power supply **208** and the optics element **210**.

The light engine **202** according to some embodiments of the present invention is similar to the circuit described herein with reference to FIG. **1**. It should be understood that although depicted as a single component in FIG. **2**A, the light engine **202** may comprise a plurality of components. For example, the LEDs may be physically separated from non-LED elements. Further, all or some of the elements within the light engine **202** may be integrated within another component such as the controller **204**, the encasement **212** or optics element **210**.

The controller **204** in FIG. **2**A manages the activation of the LEDs within the light engine **202** using the LCC signal (which may comprise one or more signals to one or more circuits within the light engine **202**) and, therefore, controls the output light spectrum that is generated by the lighting apparatus **200**. In the architecture depicted in FIG. **2**A, the controller **204** receives a constant voltage rail and a reference ground from the AC/DC power supply **208** and receives user input signals from the input device **206**. The controller **204** interprets the user input signals and may rely on information stored within a local memory (not shown) and internal software or firmware to generate the LCC signal(s) for the light engine **202**. Each of the LCC signals, according to some embodiments of the present invention, comprises a pulse signal that may be in an active high state for a set time within a duty cycle.

As one skilled in the art would understand, the controller **204** can take a number of different forms including a microcontroller programmed with software, firmware, an ASIC, an FPGA, a microprocessor, logical hardware components or other components that can generate digital signals. In one particular embodiment, the controller comprises a microprocessor from Microchip Technologies Inc. of Chandler, Ariz., USA.

The input device **206** may comprise a dimmer (ex. a triac dimmer, a 0-10V Lutron dimmer), an infrared remote control, a computer or any other device that can allow a user to make selections concerning aspects of the lighting apparatus **200**. The aspects selected may comprise any one or more of the intensity, the color, the color temperature, tint, etc. In some cases, the input device **206** may comprise sensor devices such as an ambient light sensor, a motion sensor and/or an occupancy sensor. In these cases, the sensors may provide input signals to the controller **204** that affect the LCC signal(s) that the controller **204** transmits to the light engine **202**. In some embodiments, the input device **206** may be integrated with another component such as the controller **204** or the encasement **212**. In other cases, the lighting apparatus **200** may not have an input device **206**. For instance, in one embodiment, variations in the aspects of the light output may be controlled by the controller **204** without external inputs using pre-programmed code. The pre-programmed code could be enabled based on an internal clock, a vibration detection sensor, an internal ambient light sensor, an internal motion sensor, an internal occupancy sensor, or another component that may trigger a change in an aspect of the lighting apparatus **200**. Further, the pre-programmed code could be set at the factory to calibrate the color temperature/color of the lighting apparatus **200**. Yet further, the lighting apparatus **200** in some embodiments comprises an intensity or color sense component and the pre-programmed code can correct for variations in the intensity, color temperature or color, for example variations may occur over time as LEDs may decrease in intensity at different rates over long time periods on the of months or years of operation.

The AC/DC power supply **208** may comprise a large number of different power supply configurations depending upon the particular application. For instance, the AC/DC power supply **208** should be selected to match the power needs of the light engine **202** and the controller **204** and particularly to the LEDs within the light engine **202** which will utilize the majority of the power. The AC/DC power supply **208** of FIG. **2**A receives a DC Voltage Control (DCVC) signal that can be used to adjust the DC voltage level applied to the light engine **202** and the controller **204**. This adjustment in the DC voltage level may be necessary due to uncertainties with the forward voltages of the LEDs within the light engine **202**. In one example, a 24V/20 W power supply may be used in a light engine configuration that activates 7 LEDs in series at a time, each LED having a forward voltage drop of approximately 3.4V in this example. To ensure that a desired current flows through the LEDs within the light engine **202** despite uncertainties within the forward voltage drops of the LEDs, adjustments in the DC voltage level can be made using the DCVC signal as will be described in detail below.

One skilled in the art will understand that the optics element **210** and the thermal element (not shown) can be implemented in many different manners depending on the specific technical requirements of the lighting apparatus **200**. The optics element **210**, according to some embodiments of the present invention, diffuse the light output from the LEDs such that a single color of light is perceivable at an output of the lighting apparatus **200**. In one specific example, the optics element **210** comprises a frosted acrylic plate. The thermal element (not shown) may comprise a heat sink, a heat conductive plate or film, heat conductive fins, one or more heat pipes, a fan, a heat removal diaphragm or other elements that can enable flow of heat away from the LEDs.

It should be understood that the lighting apparatus **200** of FIG. **2**A is only a sample lighting architecture that could be used with the present invention and should not be used to limit the scope of the present invention. Large numbers of alternative lighting architectures are understood by one skilled in the art. For instance, the controller **204** could be integrated with any one or more of the light engine **202**, the input device **206** and the AC/DC power supply **208**. Further, in some lighting architectures, one or more of the components within the lighting apparatus **200** may be removed. For instance, in some lighting architectures the thermal element (not shown) may be removed as passive cooling could be sufficient to remove heat generated by the LEDs or the encasement **212** could act as a thermal element itself.

According to embodiments of the present invention, the controller **204** of FIG. **2**A controls the CSC signal that in turn controls the current sense control transistors $\mathbf{110}_1$,$\mathbf{110}_2$ of FIG. **1**. By selecting a time (for example, one or more time slots within a duty cycle) to trigger the CSC signal low and therefore turn off the current sense control transistors $\mathbf{110}_1$, $\mathbf{110}_2$, the controller **204** can decide when to measure the current sense voltage V_{CS}. In some embodiments of the present invention, the controller **204** comprises an ADC that is operable to convert the current sense voltage V_{CS} from an analog signal to a digital form. In other embodiments, the ADC is a separate component coupled to the controller **204**.

FIG. **5**A is a flow chart illustrating steps of a control algorithm performed by the controller **204** within the LED lighting apparatus **200** of FIG. **2**A according to an embodiment of the present invention. Firstly, as described above, the controller **204** triggers a current sense operation at step **502**. A current sense operation can be said to be activated when the controller **204** sets the CSC signal to a low state for a time period (ex. one time slot in a duty cycle) while the LCC signal for the circuit is activated. As discussed, in this state, the resistance R_{CS} across the current sense circuit **106** of FIG. **1** is increased to the resistance of the current sense resistor **108** and the current sense voltage V_{CS} is increased as a result.

The controller **204** subsequently, at step **504**, receives the current sense voltage V_{CS}. This could be in digital form from an ADC that has converted the analog voltage to a digital form or could be in analog form and the controller **204** performs the conversion. Next, at step **506**, the controller **204** calculates the current flowing through the current sense circuit **106** at the time that the current sense voltage V_{CS} was measured. At this time, the resistance R_{CS} across the current sense circuit **106** was equal to the resistance R_A of the current sense resistor **108**. By dividing the current sense voltage V_{CS} by the known value of the resistance R_A, the controller **204** can calculate the current flowing the current sense circuit **106**. This calculated current will correspond to the current flowing through the LEDs **102** during the current sense operation, but may not exactly indicate the current flowing through the LEDs during a normal operation in which the current sense transistors $\mathbf{110}_1$,$\mathbf{110}_2$ are turned on and the resistance R_{CS} across the current sense circuit **106** is significantly reduced. At step **508**, the controller **204** may adjust the current calculated at step **506** to compensate for the change in resistance R_{CS} across the current sense circuit **106** during normal operation relative to during current sense operation. In some embodiments, step **508** is not performed and the use of the current calculated at step **506** is utilized by the controller **204**.

Next, at step **510**, according to some embodiments of the present invention, the controller **204** communicates an indication of the current level calculated in one of steps **506** and **508**. This communication can take place in a number of manners and, as will be described herein with reference to FIG. **2**A, will be directed to a user that can adjust the DCVC signal that controls the DC voltage level applied to the light engine **202**. In the embodiment of FIG. **2**A, the controller **204** communicates an indication of the current level to a user through adjustments in the light output from the lighting apparatus **200**.

In one particular implementation, the controller **204** determines whether the current level calculated is within an acceptable range of values for the current flowing through the LEDs within the light engine **202**. If the current level calculated is not within the acceptable range of values, the controller **204** may control the LCC signal to go to a low state for all or substantially all of the time within a duty cycle and therefore effectively turn off the light output from the light engine **202**. By doing this, a user can detect this information and interpret it as an indication of the current level. In response, the user can adjust the DCVC signal to correct the DC voltage level output from the AC/DC power supply **208**. For instance, the controller **204** may only turn off the light output from the light engine **202** if the current level calculated is above a maximum acceptable level. By doing this, the controller **204** can protect the LEDs within the light engine **202** from excess current issues. The controller **204** can continually check the current level within the light engine **202** even after turning the light output off by selectively turning the LCC signal to a high state and the CSC signal to a low state for a short time period (for example one time slot out of 256 time slots) in each duty cycle or a plurality of duty cycles (ex. one time slot every second). In this example, once the user has adjusted the DCVC signal so that the DC voltage level applied as the supply voltage V_{DD} is lowered to the point where the current level calculated by the controller **204** is below the maximum acceptable level, the controller **204** can control the LCC signal(s) as normal and allow a normal operation for the light output from the lighting apparatus **200** to continue.

In a second implementation, the controller **204** can communicate an indication of the current level in a different manner. For instance, in some embodiments, the controller **204** may control the LCC signal(s) in order to create a visible blinking in the light output from the lighting apparatus **200**. The actual value of the current level calculated or an indication of the current level as it relates to an acceptable range of values, can be communicated using a series of flashes that may be of consistent length or alternatively be of different time length (ex. a set of short and long flashes that communicate information using a protocol such as Morse Code). In another variant, the controller **204** may cause the light output from the lighting apparatus to blink if the current level calculated is outside of the acceptable range for the light engine, the length of the blinks indicating to a user the difference between the current level calculated and the acceptable range of currents. For example, as the user adjusts the DCVC signal to move the DC voltage level applied to the light engine **202** towards the correct level, the blinks may decrease in length to indicate that the current level calculated is getting closer to the acceptable range. It should be understood that other techniques to communicate an indication of the current level calculated are possible using adjustments in the light output from the lighting apparatus **200**.

In yet another implementation, the controller **204** can communicate an indication of the current level using changes in the light output from the lighting apparatus **200** that are not visible to the human eye. In order to accomplish this, the controller **204** may utilize a number of different modulation techniques including pulse position modulation, frequency modulation or pulse width modulation to generate the LCC signal(s) that in turn control the light output of the lighting

apparatus **200**. For example, the controller **204** may transmit digital information related to the current level calculated by adjusting the duty cycle utilized or by slightly adjusting the on/off time of the LEDs from duty cycle to duty cycle. The light output from the lighting apparatus **200** can then subsequently be received and interpreted by a separate apparatus as will be described with reference to FIGS. **4**A and **4**B.

FIGS. **4**A and **4**B are logical block diagrams of a current level display apparatus according to particular example implementations of the present invention in which the LED lighting apparatus of FIG. **2**A communicates information optically. The current level display apparatus of FIG. **4**A comprises an optical receiver **402**, a controller **404** and a display **406**. The optical receiver **402** receives the light output from the lighting apparatus **200** and provides an indication of the light levels to the controller **404** which can then interpret the light levels in order to extract the information related to the indication of the current level. The interpretation techniques used will depend upon the modulation techniques used within the controller **204**. It should be understood that the optical receiver **402** and the controller **404** work together to regenerate the indication of the current level being transmitted by the controller **204** through the light output of the lighting apparatus **200**. Once the indication of the current level has been regenerated, the controller **404** transmits it to the display **406** so that it can be displayed to a user. The user can read the display **406** and based upon the indication of the current level (which may be a number or another indication (ex. color, shape, arrow, etc.), the user can adjust the DCVC signal within the AC/DC power supply **208** in order to adjust the DC supply voltage V_{DD} applied to the light engine **202**.

FIG. **4**B depicts a slightly modified version of the current level display apparatus of FIG. **4**A. In the FIG. **4**B, the display **406** is replaced with first, second and third sets of LEDs **408**,**410**,**412**. In one implementation, the first, second and third sets of LEDs **408**,**410**,**412** comprise green LEDs, yellow LEDs and red LEDs respectively. In this embodiment, the controller **404** is operable to turn on one or more of the sets of LEDs **408**,**410**,**412** based upon the received indication of the current level. For example, if the current level is within an acceptable range, the green LEDs **408** may be turned on while, if the current level is in at a critical level, the red LEDs **412** may be turned on. In other cases, in which the current level is not ideal, the yellow LEDs **410** may be turned on. The LEDs **408**,**410**,**412** may be used to provide information and/or instructions to a user in order to trigger an adjustment in the DCVC signal for the AC/DC power supply **208**.

It should be noted that the adjustment of the DCVC signal could be accomplished in a number of manners depending upon the particular implementation within the AC/DC power supply **208**. In some example implementations, an adjustment in the DCVC signal is triggered by a mechanical adjustment in an element such as a screw, dial, dimmer or other input device. In other implementations, the DCVC signal may be controlled electronically. In embodiments of the present invention related to FIG. **2**A, a human will view the indication of the current level in some form as described and manually adjust the voltage of the AC/DC power supply **208**, though it should be understood that in other embodiments, such a voltage adjustment is done automatically.

FIG. **2**B is a modified logical block diagram to that depicted in FIG. **2**A. The lighting apparatus $\mathbf{200}_1$ of FIG. **2**B is similar to that of FIG. **2**A and therefore similar elements have been labeled with the same references. In FIG. **2**B, the lighting apparatus $\mathbf{200}_1$ further comprises a terminal **214** which is coupled to a current indication display **216**. In this embodiment, rather than communicate an indication of the current level through control of the LCC signal(s) and therefore the light output of the lighting apparatus, the controller **204** communicates an indication of the current level calculated to the current indication display **216** directly through the terminal **214**. This communication could take many forms and the indication of the current level may be transmitted in analog or digital form, may be modulated or not and may be encapsulated within a protocol system (ex. packet based protocol such as Internet Protocol). The current indication display **216** can operate in much the same manner as either the apparatus of FIG. **4**A or **4**B but there will be no need for the optical receiver **402**.

FIG. **2**C is a further modified logical block diagram to that depicted in FIG. **2**A. The lighting apparatus $\mathbf{200}_2$ of FIG. **2**C is similar to that of FIG. **2**A and therefore similar elements have been labeled with the same references. In FIG. **2**C, the controller **204** does not communicate the indication of the current level to a user so that the user can adjust the DC voltage level output from the AC/DC power supply **208**. Instead, in FIG. **2**C, the controller **204** directly controls the AC/DC power supply **208** using the DCVC signal. In this embodiment, the controller **204** will operate with a modified control algorithm to that described with reference to FIG. **5**A for the lighting apparatus **200** of FIG. **2**A.

FIG. **5**B is a flow chart illustrating steps of a control algorithm performed by a controller within the LED lighting apparatus $\mathbf{200}_2$ of FIG. **2**C according to an embodiment of the present invention. The control algorithm of FIG. **5**B is similar to that of FIG. **5**A and therefore similar elements have been labeled with the same references. As depicted in FIG. **5**B, rather than step **510**, the controller **204** within the lighting apparatus $\mathbf{200}_2$ determines at step **512** whether the current level calculated within step **508** (or **506** if step **508** is not performed) is acceptable. This can be done by a number of manners. For example, an acceptable range may be programmed within the controller **204** and the controller **204** may compare the current level calculated with the acceptable range. In other examples, the controller **204** may have an exact value that is desired for the current level within the light engine and the controller **204** may only determine that the current level calculated is acceptable if the current is precisely at the value desired.

As shown, if the current level calculated is not acceptable at step **512**, the controller **204** adjusts the DC supply voltage V_{DD} output from the AC/DC power supply **208** by adjusting the DCVC signal. This adjustment may be precisely calculated to result in a current level within the light engine **202** that will be acceptable or alternatively may be an adjustment in the direction towards the current level becoming acceptable. In particular, the controller **204** may determine the level of the adjustment by the difference between the current level calculated and the acceptable range of current levels (or the exact value that is desired). After the adjustment at step **514**, the controller **204** may continue to monitor the current level by returning to step **502** and repeating the steps of FIG. **5**B. If the current level calculated is acceptable at step **512**, the controller **204** may also continue to monitor the current level by returning to step **502** and repeating the steps of FIG. **5**B. Alternatively, once the current level calculated is acceptable at step **512**, the controller **204** may stop monitoring the current level for a set time period or possibly forever.

Although the embodiments of FIGS. **2**A, **2**B and **2**C are described as independent embodiments of the present invention, it should be understood that two or more of the embodiments could be implemented within a single lighting apparatus. For instance, the automatic control system described above with reference to FIG. **2**C could be implemented along

with a communication system such as that described with reference to FIG. **2**A or **2**B. The use of the communication system of an indication of the current level may be desirable to provide back-up information, to provide a person the actual value for the current level and/or to provide an emergency shut-off of the LEDs in the case that the current flowing through the LEDs is above a maximum acceptable level.

Although described as time slots within a duty cycle, it should be understood that the divisions within a duty cycle may be in any segments. For instance, in some embodiments of the present invention, the duty cycle is divided into time segments in μseconds. In other embodiments, the duty cycle is divided into time slots (ex. **256**) but the actual number of time slots assigned to a particular operational state may not be an integer. In these cases, the exact selection of the number of time slots may be set by an average of the number of time slots across a plurality of duty cycles.

Although various embodiments of the present invention have been described and illustrated, it will be apparent to those skilled in the art that numerous modifications and variations can be made without departing from the scope of the invention, which is defined in the appended claims.

What is claimed is:

1. A circuit comprising:

at least one light emitting diode (LED) coupled between a supply voltage and a node;

a current sense circuit coupled between the node and a reference ground, the current sense circuit comprising a resistor coupled in parallel with at least one transistor, the at least one transistor being activated during a first state and being deactivated during a second state;

wherein the node is coupled to a current determination apparatus operable to determine a current flowing through the at least one LED during the second state using a voltage sensed at the node.

2. A circuit according to claim **1** further comprising a light control transistor coupled in series with the at least one LED, the light control transistor being activated for a time period set for the at least one LED to be activated within a duty cycle; and wherein the at least one transistor within the current sense circuit is within the second state during the time period set for the at least one LED to be activated within the duty cycle.

3. A circuit according to claim **1**, wherein a resistance of the current sense circuit is at a first value during the first state and a second value higher than the first value during the second state.

4. A circuit according to claim **1**, wherein the at least one transistor within the current sense circuit is within the first state for a first time period within a duty cycle and within the second state for a second time period within the duty cycle, the first time period being substantially longer than the second time period.

5. An apparatus incorporating a circuit according to claim **1** and further comprising the current determination apparatus.

6. An apparatus according to claim **5**, wherein, in order to determine a current flowing through the at least one LED during the second state, the current determination apparatus is operable to sense a voltage at the node during the second state and to divide the sensed voltage by a resistance of the resistor within the current sense circuit.

7. An apparatus according to claim **6**, wherein the current determination apparatus is further operable to determine a current flowing through the at least one LED during the first state by compensating the determined current flowing through the at least one component during the second state by the change in resistance within the current sense circuit between the first and second states.

8. An apparatus according to claim **5**, wherein the current determination apparatus is further operable to control the at least one transistor within the current sense circuit.

9. An apparatus according to claim **8** further comprising a light control transistor coupled in series with the at least one LED, the light control transistor being activated for a time period set for the at least one LED to be activated within a duty cycle; and wherein the at least one transistor within the current sense circuit is within the second state during the time period set for the at least one LED to be activated within the duty cycle.

10. An apparatus according to claim **9**, wherein the current determination apparatus is further operable to control the light control transistor.

11. A circuit comprising:

at least one light emitting diode (LED) coupled between a node and a reference ground;

a current sense circuit coupled between a supply voltage and the node, the current sense circuit comprising a resistor coupled in parallel with at least one transistor, the at least one transistor being activated during a first state and being deactivated during a second state;

wherein a voltage at the node is coupled to a current determination apparatus operable to determine a current flowing through the at least one LED during the second state.

12. A circuit according to claim **11** further comprising a light control transistor coupled in series with the at least one LED, the light control transistor being activated for a time period set for the at least one LED to be activated within a duty cycle; and wherein the at least one transistor within the current sense circuit is within the second state during the time period set for the at least one LED to be activated within the duty cycle.

13. A circuit according to claim **11**, wherein a resistance of the current sense circuit is at a first value during the first state and a second value higher than the first value during the second state.

14. A circuit according to claim **11**, wherein the at least one transistor within the current sense circuit is within the first state for a first time period within a duty cycle and within the second state for a second time period within the duty cycle, the first time period being substantially longer than the second time period.

15. An apparatus incorporating a circuit according to claim **11** and further comprising the current determination apparatus.

16. An apparatus according to claim **15**, wherein, in order to determine a current flowing through the at least one LED during the second state, the current determination apparatus is operable to sense a voltage at the node during the second state to calculate a voltage drop across the current sense circuit by subtracting the sensed voltage from the supply voltage and to divide the voltage drop by a resistance of the resistor within the current sense circuit.

17. An apparatus according to claim **16**, wherein the current determination apparatus is further operable to determine a current flowing through the at least one LED during the first state by compensating the determined current flowing through the at least one component during the second state by the change in resistance within the current sense circuit between the first and second states.

18. An apparatus according to claim **11**, wherein the current determination apparatus is further operable to control the at least one transistor within the current sense circuit.

* * * * *