

Constricted Convection Cooling System for an Electronic Display

Inventor: William Dunn

Technical Field

[0001] This invention generally relates to cooling systems and in particular to cooling systems for electronic displays.

Background of the Art

[0002] Conductive and convective heat transfer systems for electronic displays are known. These systems of the past generally attempt to remove heat from the electronic components in a display through as many sidewalls of the display as possible. In order to do this, the systems of the past have relied primarily on fans for moving air past the components to be cooled and out of the display. In some cases, the heated air is moved into convectively thermal communication with fins. Some of the past systems also utilize conductive heat transfer from heat producing components directly to heat conductive housings for the electronics. In these cases, the housings have a large surface area, which is in convective communication with ambient air outside the housings. Thus, heat is transferred convectively or conductively to the housing and is then transferred into the ambient air from the housing by natural convection.

[0003] While such heat transfer systems have enjoyed a measure of success in the past, improvements to displays require even greater cooling capabilities.

Summary of the Invention

[0004] In particular, cooling devices for electronic displays of the past have generally used convective heat dissipation systems that function to cool an entire interior of the display by one or more fans and fins, for example. By itself, this is not adequate in many climates, especially when radiative heat transfer from the sun through a display window becomes a major factor. In many applications and locations 200 Watts or more of power through such a display window is common. Furthermore, the market is demanding larger screen sizes for displays. With increased electronic display screen size and corresponding display window size more heat will be generated and more heat will be transmitted into the displays.

[0005] In the past, many displays have functioned satisfactorily with ten or twelve inch screens. Now, many displays are in need of screens having sizes greater than or equal to twenty-four inches that may require improved cooling systems. For example, some outdoor applications call for seventy inch screens and above. With increased heat production with the larger screens and radiative heat transfer from the sun through the display window, heat dissipation systems of the past, which attempt to cool the entire interior of the display with fins and fans, are no longer adequate.

[0006] A large fluctuation in temperature is common in the devices of the past. Such temperature fluctuation adversely affects the electronic components in these devices. Whereas the systems of the past attempted to remove heat from the entire interior of the display, a preferred embodiment of the present invention causes directed convective heat transfer from the anterior of the display. By the aspects described below, the present invention has made consistent cooling possible for electronic

displays having screens of sizes greater than or equal to twelve inches. For example, cooling of a seventy inch screen can be achieved, even in extremely hot climates. Greater cooling capabilities are provided by the device and method described and shown in more detail below.

[0007] An exemplary embodiment of the present invention relates to a constricted convection cooling system and a method of cooling an electronic display. An exemplary embodiment includes an external housing and a convection constriction plate. The external housing preferably includes an air entrance end and an exhaust end. The air entrance end defines an entrance aperture; while the exhaust end defines an exit aperture. The convection constriction plate is preferably mounted to the posterior display surface. The convection constriction plate further defines a constricted convection cooling channel immediately behind the posterior display surface. The convection cooling channel may be adapted to receive air entering the entrance aperture and adapted to expel air through the exit aperture.

[0008] The air entering the constricted convection cooling channel may be from a refrigerated air source in communication with the entrance opening. A septum in association with the external housing may be adapted to direct air into the constricted convection cooling channel. A fan may be used to draw the refrigerated air through the constricted convection cooling channel. In other embodiments, a fan may be used to force air through the constricted convection cooling channel.

[0009] The foregoing and other features and advantages will be apparent from the following more detailed description of the particular embodiments, as illustrated in the accompanying drawings.

Brief Description of the Drawings

[0010] A better understanding of an exemplary embodiment will be obtained from a reading of the following detailed description and the accompanying drawings wherein identical reference characters refer to identical parts and in which:

[0011] FIGURE 1 is a perspective view of a display that may be used in an exemplary embodiment.

[0012] FIGURE 2 is a posterior view of a display that may be used in an exemplary embodiment.

[0013] FIGURE 3 is a perspective view of the convection constriction plate.

[0014] FIGURE 4 is an exploded view of a display that may be used in an exemplary embodiment and an exemplary embodiment of the convection constrictive plate.

[0015] FIGURE 5 is a front perspective view of a fan and display that may be used in an exemplary embodiment of the present invention and a exemplary embodiment of the constrictive convection plate.

[0016] FIGURE 6 is a perspective view of a double display housing utilizing an exemplary embodiment of the constricted convection air cooling system for an electronic display.

[0017] FIGURE 7 is a posterior view of a display the may be found in a double display housing utilizing an exemplary embodiment of the constricted convection air cooling system for an electronic display.

[0018] FIGURE 8 is an exploded view of an exemplary embodiment of the constricted convection air cooling system for an electronic display.

[0019] **FIGURE 9** is a perspective view of an exemplary embodiment of the constricted air cooling system for an electronic display of the present invention with an optional isolated gas cooling system.

Detailed Description

[0020] Exemplary embodiments relate to a cooling system for an electronic display and to combinations of the cooling system and the electronic display. Exemplary embodiments of the present invention provide a constrictive convection cooling system for an electronic display.

[0021] Fig. 1 is a perspective view of a display that may be used in an exemplary embodiment of the present invention. As may be appreciated, when the display 10 is exposed to outdoor elements, the temperatures inside the display 10 will vary greatly without some kind of cooling device. As such, the electronics including the display screen 12 (e.g., LCD screen) will have a greatly reduced life span. By implementing certain embodiments of the cooling system disclosed herein, temperature fluctuation is greatly reduced. This cooling capability has been achieved in spite of the fact that larger screens generate more heat than smaller screens.

[0022] The display 10 shown is equipped with an innovative constricted convection cooling system. Accordingly, it may be placed in direct sunlight. Although the cooling system may be used on smaller displays, it is especially useful for larger LCD, LED, or organic light emitting diodes (OLED) displays. These screens, especially with displays over 24 inches, face significant thermoregulatory issues in outdoor environments.

[0023] It is to be understood that the spirit and scope of the disclosed embodiments includes cooling of displays including, but not limited to LCDs. By way of example and not by way of limitation, the present invention may be used in conjunction with displays selected from among LCD (including TFT or STN type), light emitting diode (LED), organic light emitting diode (OLED), field emitting display (FED), cathode ray tube (CRT), and plasma displays. Furthermore, embodiments of the present invention may be used with displays of other types including those not yet discovered. In particular, it is contemplated that the present invention may be well suited for use with full color, flat panel OLED displays. While the embodiments described herein are well suited for outdoor environments, they may also be appropriate for indoor applications (e.g., factory environments) where thermal stability of the display may be at risk. Furthermore, while most of this disclosure is written in terms of cooling, embodiments enclosed herein may be utilized for heating in particular applications. The means for cooling the air in the cooling systems may be replaced with a means for heating the air. A heating system for an electronic display would allow outdoor screens in climates normally too cold for liquid crystal or other like technologies.

[0024] Fig. 2 is a posterior view of a display 10 that may be used in an exemplary embodiment of the present invention. In a typical display, the display posterior 22 includes four mounting brackets 20. The four mounting brackets 20 are shown by way of example and not by way of limitation, exemplary embodiments may be used with various numbers of mounting brackets 20. The mounting brackets 20 serve to attach the constricted convection plate 30 (shown in Fig. 3) to the display posterior 22. The

height that the mounting brackets 20 extending from the display posterior 22 define the depth of the constricted convection cooling channel 50 (shown in Fig. 5).

[0025] Figure 3 is an exemplary embodiment of the constrictive convection plate 30 of the present invention. The constrictive convection plate 30 may have angled side panels 32. The angled side panels 32 are adapted to extend from the constrictive convection plate 30 and make contact with the display posterior 22 and direct air through the constrictive convection channel 50 (shown in Figure 5). The constrictive convection panel 30 may also be constructed to include access apertures 34. The access apertures 34 are defined by the constrictive convection plate 30 and allow access to hardware found on the display posterior 22; without the need to remove the constrictive convection plate 30. The access apertures 34 may be plugged before operation to maintain directed contact between the refrigerated air and the posterior display 10 surface.

[0026] The width of the constrictive convection channel 50 may vary according to the thermal requirements of a particular application. In some embodiments, the constrictive convection channel 50 may be one-half inch or less. In other embodiments, the constrictive convection channel 50 may be between one-half and one inch. In still other embodiments, the constrictive convection channel 50 may be greater than 1 inch.

[0027] Figure 4 is an exploded view showing the relationship of a display 10 that may be used in an exemplary embodiment of the present invention and an exemplary embodiment of the convection constrictive plate 30 of the present invention. As described above, the convection constriction plate 30 may be attached to the display posterior 22 by the mounting brackets 20 (shown in Figure 2). The size of the

convection constriction plate 30 may be of sufficient size to cover the entire posterior display surface 22. In other exemplary embodiments, the size of the convection constriction plate 30 may be adjusted to provide sufficient cooling of the display posterior 22.

[0028] Figure 5 is an exemplary embodiment of the present invention. The constrictive convection plate 30 is shown mounted to the display posterior 22. The mounting brackets 20 (shown in Fig. 2) may be used to secure the constrictive convection plate 30. The constrictive convection plate 30 and the display posterior 22 define a constricted convection cooling channel 50 immediately behind the display posterior 22. In some exemplary embodiments, constrictive convection cooling channel 50 may run the length and width of the display 10. In other embodiments, the constrictive convection cooling channel 50 may be of sufficient size to provide thermal stability to the display 10.

[0029] The constrictive convection cooling system 54 may include a means for increasing the speed at which air travels through the constrictive convection cooling channel 50. This means may include a fan 52 which may be positioned near an opening of the constriction convection cooling channel 50. The fan 52 may either force the air through the constrictive convection channel 50 or pull the air through the constrictive convection channel 50. The use of a fan 52 may provide increased velocity of the air traveling through the constrictive convection cooling channel 50, thus increasing the efficiency with which heat is transferred from the display posterior 22.

[0030] In other exemplary embodiments, a means for cooling the air (not shown in the Figures) passing through the constrictive convection cooling channel 50 may be used.

A means for cooling the air may include, but is not limited to, a conditioning unit, a refrigeration unit, or any other means to decrease the temperature of the air passing through the constrictive convection plate 30.

[0031] Figure 6 is a double display housing 60 utilizing an exemplary embodiment of the constricted convection air cooling system 54 for an electronic display of the present invention. A convection constriction plate 30 is mounted to a display posterior 22. The convection constriction plate 30 and the display posterior 22 define a constricted convection cooling channel 50 immediately behind the display posterior 22. An entrance opening 62 adapted to receive air is defined by the constrictive convection plate 30. An exit opening 64 adapted to expel air from the constrictive convection cooling channel 50 is defined by the convection constriction plate 30 and the display posterior 22. As above, the constrictive convection plate 30 may have access apertures 34. The access apertures 34 allow access to hardware located behind the constrictive convection plate 30. The access apertures 34 may be closed before use using plugs or other similar devices (not shown in the Figures).

[0032] An air source (not shown in the Figures) may be in communication with the entrance opening 62. Air is forced through the entrance opening 62 and into the constrictive convection channel 50. The constrictive convection channel 50 directs the air into contact with the display posterior 22 increasing heat transfer from the display. In addition, the narrowing of the air flow path by the constrictive convection channel 50 also increases the effectiveness of the heat transfer. After passing over the display posterior 22, the air exits the constrictive convection channel 50 through the exit

opening 64. The expelled air may then pass through a portion of the double display housing 60 into the atmosphere.

[0033] As above, a means for cooling the air (not shown in the Figures) forced into the constrictive convection cooling channel 50 may be employed. The means for cooling the air may include, but is not limited to, a conditioning unit, a refrigerating unit, or any other means to decrease the temperature of the air before entering the constrictive convection cooling channel 50.

[0034] Figure 7 is a double display housing 60 that may use an exemplary embodiment of the constrictive convection air cooling system 54 of the present invention. The display posterior 22 may include mounting brackets 20. The mounting brackets 20 are shown by way of example and not by way of limitation. The present invention may use various numbers of mounting brackets 20. The mounting brackets 20 may serve to attach the constrictive convection plate 30 (shown in Figure 3) to the display posterior 22. The height of the mounting brackets 20 extend from the display posterior defines the depth of the constrictive convection cooling channel 50 (shown in Figure 5).

[0035] As with other exemplary embodiments, a means for increasing the speed at which the air travels through the constrictive convection cooling channel 50 may be used. The means for increasing the air speed may be in association with either the entrance opening 62 or the exit opening 64. The means for increasing the air speed may include, but is not limited to, a fan (shown in Figure 5).

[0036] Figure 8 is an exploded view of the constrictive convection cooling system 54, for use with an electronic display 10, of the present invention. The display 10 may be

encased in an external housing 80. The external housing 80 may have an air entrance end 82 and an exhaust end 84. The air entrance end 82 defines an entrance aperture 86. The exhaust end 84 defines an exit aperture 88. A constrictive convection plate 30 may be mounted to the display posterior 22 (shown in Figure 2) using mounting brackets 20. The constrictive convection plate 30 and the display posterior 22 define a constrictive convection cooling channel 50 immediately behind the display posterior 22. The constrictive convection plate 30 further defines an entrance opening 62 and an exit opening 64 (shown in Figure 6). The entrance opening may be adapted to receive air entering the entrance aperture 86. The exit opening may be adapted to expel air through the exit aperture 88.

[0037] Septa 90 are associated with the external housing 80. The septa 90 may be adapted to prevent air from evading the constricted convection channel 50. The septa 90 may also be adapted to provide support and an attachment port for the external housing 80.

[0038] Air or another appropriate gas may be in gaseous communication with the entrance opening 86. The air then passes through the entrance opening 86 into a middle chamber 92. The middle chamber 92 is defined by the external housing 80 and the constrictive convection plate 30. Once the air enters the middle chamber it may be directed through the entrance opening 62. A septum 90 may be positioned to direct air into the entrance opening 62 and prevent the air evading the entrance opening 62. After passing through the entrance opening 62, the air may enter the constrictive convection cooling channel 50. as the air passes through the convection constrictive cooling channel heat is transferred away from the display posterior 22.

[0039] After absorbing heat from the display posterior 22, the air may exit the constrictive convection channel 50 through the exit opening 64. A septum 90 may be used to prevent the exiting air from evading the exit aperture 88, and to direct the air towards the exit aperture 88. The air is then expelled through the exit aperture 88 in to the atmosphere.

[0040] To assist in the movement of air through the constrictive convection channel 50 a means to increase the air speed may be used. Increasing the air speed allows for increased heat removal. The means to increase the air speed may include, but is not limited to, a fan 52. The fan 52 may be associated with the exit opening 64 and may draw air from the constrictive convection channel 50. In other embodiments, the fan 52 may be associated with the entrance opening 62 and may force air into the constrictive convection channel 50.

[0041] In other exemplary embodiments, a means for cooling air in gas communication with the entrance opening 62 may be employed. The means for cooling the air may include, but is not limited to, a conditioning unit, a refrigerating unit, or any other device that decreases the temperature of the air. Cooling the air further increases the air's ability to transfer heat from the display posterior 22. The means for cooling air may be housed within the external housing 80, or it may be an external unit.

[0042] Figure 9 is a display 10 housing using the constriction convection cooling system 54 of the present invention. An exemplary display 10 may also be utilized in conjunction with an optional isolated gas cooling system 100 which is the subject matter of co-pending U.S. Application No. 61/033,064, hereby incorporated by reference, in its entirety herein.

[0043] The exemplary embodiment shown in Figure 9 includes three cooling loops. The first cooling loop is comprised of the constrictive convection plate 30 mounted to the display posterior 22. The second cooling loop is comprised of the isolated gas cooling system 100. The third cooling loop is comprised of the ambient air vent system used to cool the refrigeration unit 110. In other exemplary embodiments, all three loops may include refrigerated air. In still other exemplary embodiments, all three loops may contain heated air. The ability to provide cooled and heated air in the loops allows use of an outdoor electronic display across a variety of climates. Other exemplary embodiments may contain any combination of cooling loops.

[0044] In the first cooling loop, a constrictive convection plate 30 may be mounted to the display posterior 22 (shown in Figure 2). Mounting brackets 20 (shown in Figure 2) may be used to fix the constrictive convection plate to the display posterior. A constrictive convection channel 50 is defined by the constrictive convection plate 30, and is immediately against the display posterior 22.

[0045] Air may enter the entrance aperture 86, which is defined by external housing 80. The air passes through the entrance aperture 86 to the entrance opening 62, and into the constrictive convection channel 50. The air may then be expelled into the atmosphere from the constrictive convection channel 50 through the exit opening 64. Optionally, a means for increasing the speed of the air traveling through the constrictive convection channel 50 may be included either associated with the entrance opening 62 or the exit opening 64.

[0046] The second cooling loop may be an exemplary embodiment of an isolated gas cooling system 100. The isolated gas cooling chamber 102 comprises a closed loop

which includes a gas chamber 104 and return air passage 106. The gas chamber 104 includes a transparent plate 108. The term “isolated gas” refers to the fact that the gas within the isolated gas cooling chamber 102 is essentially isolated from the external air in the housing of the display 10. In the embodiment shown, the isolated gas cooling system 100 comprises refrigerated air. Because the gas chamber 102 is positioned in front of the display 10, the gas should be substantially free of dust or other contaminants that might negatively affect the display image.

[0047] The isolated gas may be almost any transparent gas, including, but not limited to, normal air, nitrogen, helium, or any other transparent gas. The gas is preferably colorless so as not to affect the image quality. Furthermore, the isolated gas cooling chamber 102 need not necessarily be hermetically sealed from the external air. It is sufficient that the gas in the chamber is isolated to the extent that dust and contaminants may not substantially enter the first gas chamber.

[0048] The gas chamber 104 is in gaseous communication with the return air passage 106. A refrigeration unit 108 may be provided within the closed circuit. The refrigeration unit may be any device which cools the air in the isolated gas cooling chamber 102. Along with cooling the air, the refrigeration unit 108 may be utilized to propel the gas around the isolated gas cooling chamber 102. The gas chamber 104 includes at least one front glass 108 mounted in front of the display 10. The front glass 108 may be set forward from the display 10 by spacers (not shown in the Figures). The spacing members define the depth of the narrow channel passing in front of the display 10. The spacing members may be independent of alternatively may be integral with some with some other component of the device (i.e., integral with the front plate). The

display 10, the spacing members, and the front glass 108 define the narrow gas chamber 104. The gas chamber 104 may be gaseous communication with the return air passage 106 through entrance openings 112 and exit openings 114.

[0049] As the isolated gas in the gas chamber 104 traverses the isolated gas cooling chamber 102 it contacts the display 10 surface. Contacting the cooling gas directly to the display 10 enhances the convective heat transfer way from the display 10. By utilizing the display 10 as the posterior surface wall of the gas chamber 104, there are fewer surfaces to impact the visible light traveling through the display 10. Furthermore, the device will be lighter and cheaper to manufacture.

[0050] Although the embodiment shown utilizes the display 10, certain modifications and/or coatings (e.g., anti-reflective coatings) may be added to the display 10, or to other components of the system in order to accommodate the coolant gas or to improve the optical performance of the device. In the embodiment shown, the display 10 may be the front glass plate of a liquid crystal display (LCD) stack. However, almost any display surface may be suitable for embodiments of the present cooling system. Although not required, it is preferable to allow the cooling gas in the gas chamber 104 to contact the display 10 directly. In this way, the convective effect of the circulating gas will be maximized. Preferably the gas, which has absorbed heat from the display 10 may then be diverted to the refrigeration unit 110 by way of the return air passage 106.

[0051] To maintain efficiency of the refrigeration unit 110, a third cooling loop may be utilized, wherein ambient air may be passed through the external housing 80. The ambient air enters the external housing through vent openings 116 and exits through

vent exits 118. The ambient air passing through the vent openings and exits 116 and 118 carries away heat generated by the refrigeration unit 110.

[0052] An optional air filter (not shown) may be employed within the isolated gas cooling system 100 to assist in preventing contaminants and dust from entering the gas chamber 104. It is also understood that any cooling loop may be include cooled air, and as stated above the cooling loop may also provide heated air.

[0053] The constricted convection cooling system may also be used in conjunction with an air curtain as described in Co-pending Application No. 11/941,728, hereby incorporated by reference in its entirety.

[0054] Having shown and described a preferred embodiment of the invention, those skilled in the art will realize that many variations and modifications may be made to affect the described invention and still be within the scope of the claimed invention. Additionally, many of the elements indicated above may be altered or replaced by different elements which will provide the same result and fall within the spirit of the claimed invention. It is the intention, therefore, to limit the invention only as indicated by the scope of the claims.

CLAIMS

1. A constricted convection air cooling system for an electronic display, the system comprising:

an external housing with an air entrance end and an exhaust end;

wherein the air entrance end defines an entrance aperture;

wherein the exhaust end defines an exit aperture;

a convection constriction plate mounted to a posterior display surface;

wherein the constriction plate defines a constricted convection cooling channel immediately behind the posterior display surface; and

wherein the convection cooling channel defines an entrance opening adapted to receive air entering the entrance aperture and an exit opening adapted to expel air through the exit aperture.

2. The system of claim 1, wherein:

the posterior display surface includes at least two mounting brackets adapted to receive the convection constriction plate.

3. The system of claim 1, further comprising:

a refrigerated air source in gas communication with the entrance opening.

4. The system of claim 1, further comprising:

a septum associated with the external housing adapted to prevent refrigerated air from evading the constricted convection channel.

5. The system of claim 1, further comprising:

a fan adapted to draw air through the constricted convection channel.

6. The system of claim 1, further comprising:

a fan associated with the entrance aperture adapted to force air through the constricted convection channel.

7. The system of claim 1, wherein:

the convection constriction plate defines a constriction plate aperture.

8. The system of claim 1, further comprising:

a fan adapted to move air through the constricted convection channel; and

a septum associated with the external housing adapted to prevent refrigerated air from evading the constricted convection channel.

9. The system of claim 8, further comprising:

a refrigerated air source in gas communication with the entrance opening.

10. The system of claim 8, wherein:

the external housing defines a middle chamber immediately posterior to the constricted convection channel; and

the external housing defines a second exit aperture.

11. The system of claim 10, wherein:

the convection constriction plate defines a constriction plate aperture.

12. A constricted convection cooling system for an electronic display, the system comprising:

a convection constriction plate mounted to a posterior display surface;

the convection constriction plate defines a constricted convection cooling channel with an entrance opening and an exit opening; and

means for moving air through the constricted convection cooling channel.

13. The system of claim 12, further comprising:

an external housing with an air entrance end and an exhaust end;

wherein the air entrance end defines an entrance aperture; and

wherein the exhaust end defines an exit aperture.

14. The system of claim 13, further comprising:

a refrigerated air source.

15. The system of claim 13, further comprising:

a septum adapted to prevent refrigerated air from evading the constricted convection channel.

16. The system of claim 14, wherein:

the convection constriction plate defines a constriction plate aperture.

17. A method of cooling an electronic display comprising:

forming a narrow convection channel behind a posterior surface of the display;

generating refrigerated air;

supplying the refrigerated air at a first end of the narrow convection channel;

forcing the refrigerated air through the convection channel in order to cool the display;

18. The system of claim 17, further comprising:


expelling at least a first portion of said refrigerated air at an exit opening of the narrow convection channel.


19. The system of claim 17, further comprising:


expelling a second portion of said refrigerated air through a constriction plate aperture.


ABSTRACT


A preferred embodiment of the present invention relates to a cooling system and a method for cooling an electronic display. A preferred embodiment includes a constrictive convection plate. The components of the system are preferably housed within the electronic display housing. The constrictive convection plate defines a constrictive convection cooling channel and is posterior to and co-extensive with the posterior display surface. Fans may be used to propel or pull air through the constrictive convection channel. A refrigeration unit may be employed to cool the air traveling through the constrictive convection channel. The air removes heat directly from the posterior display surface.

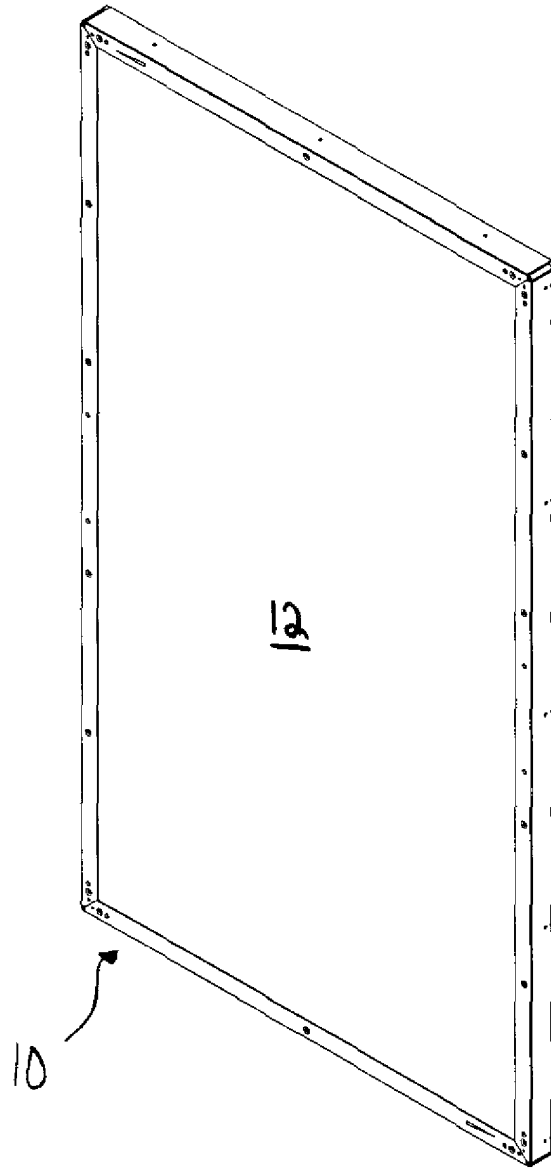


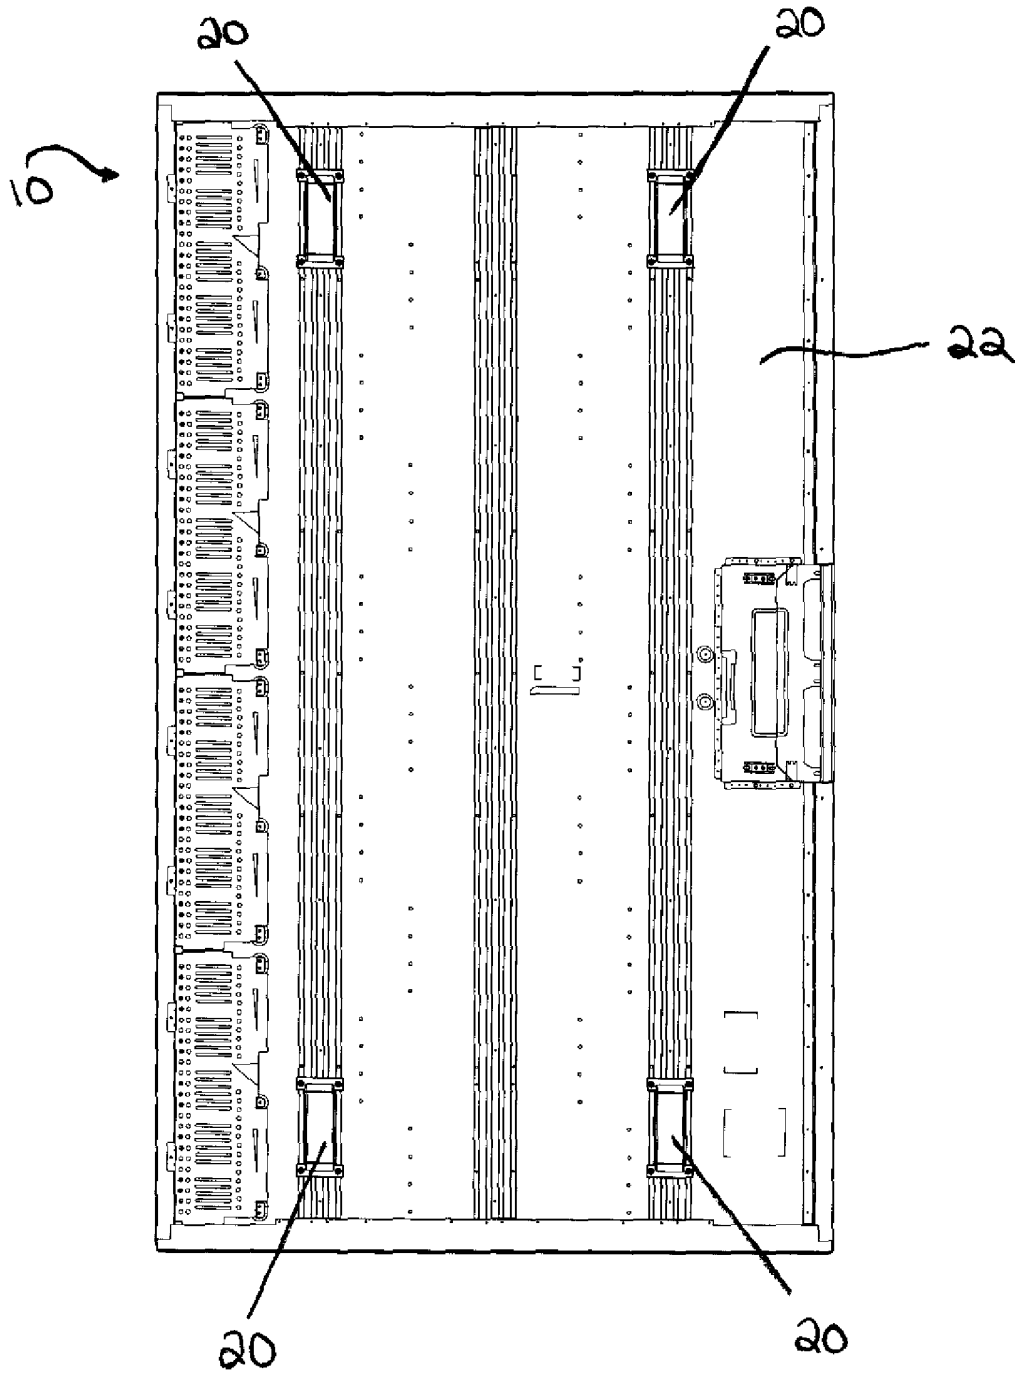


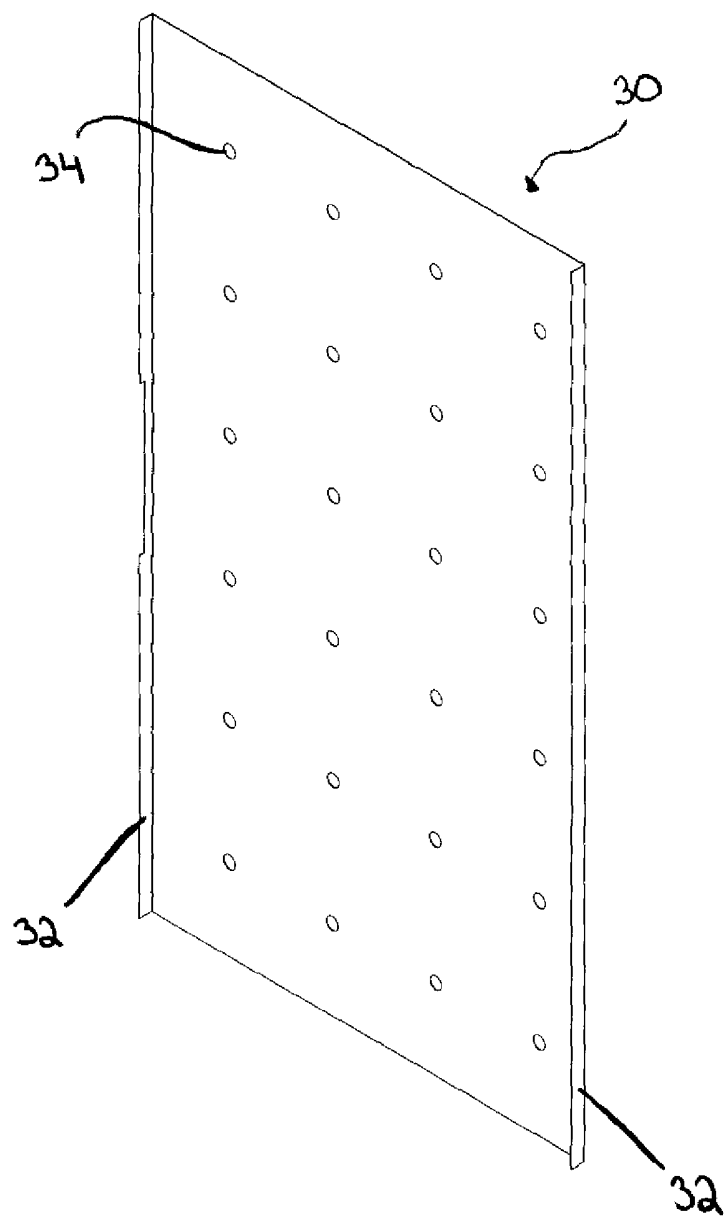

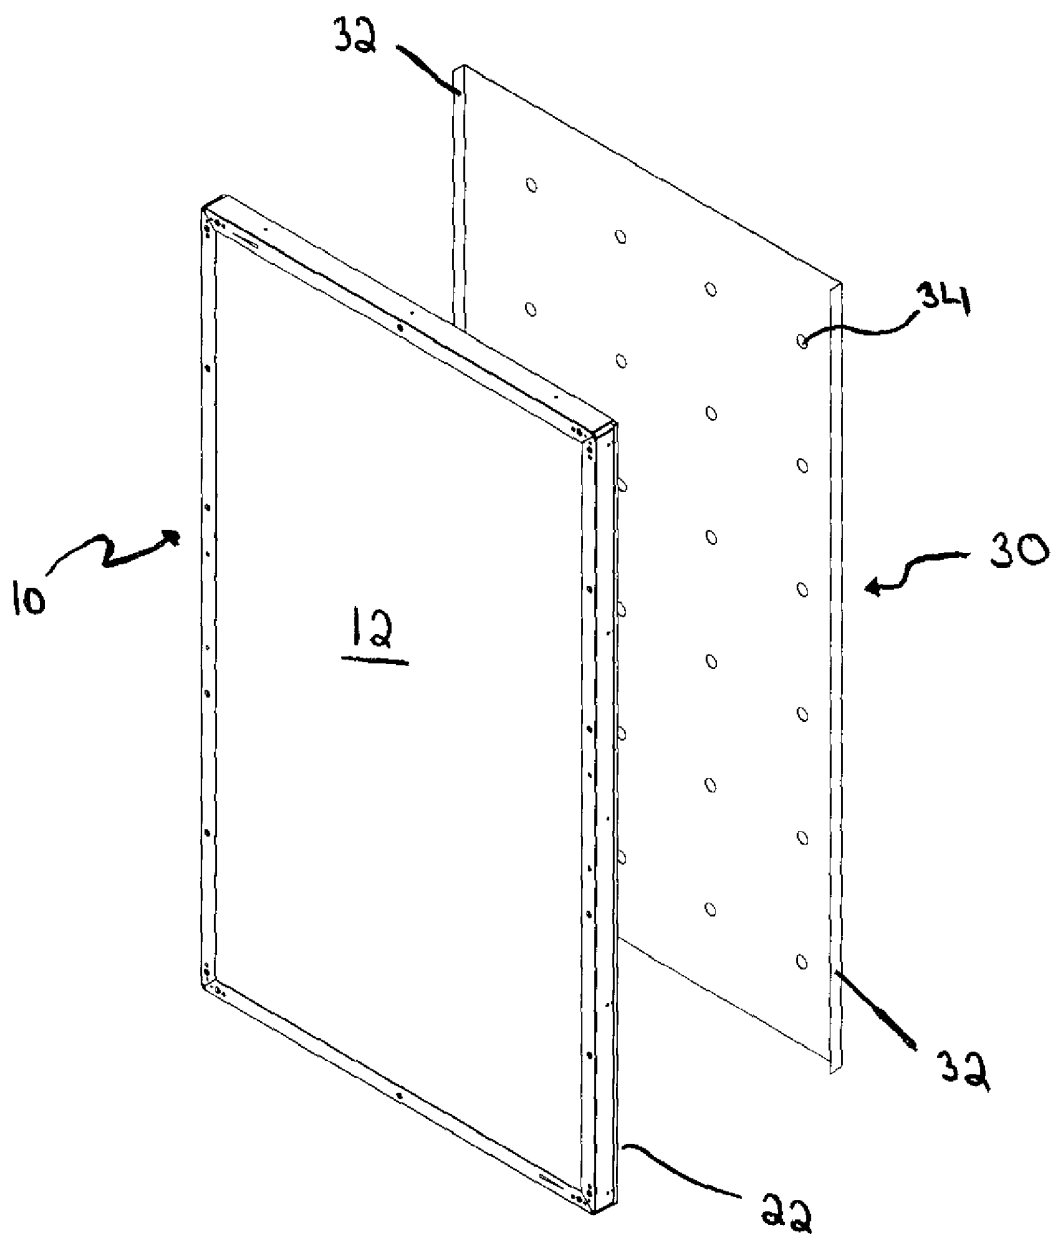

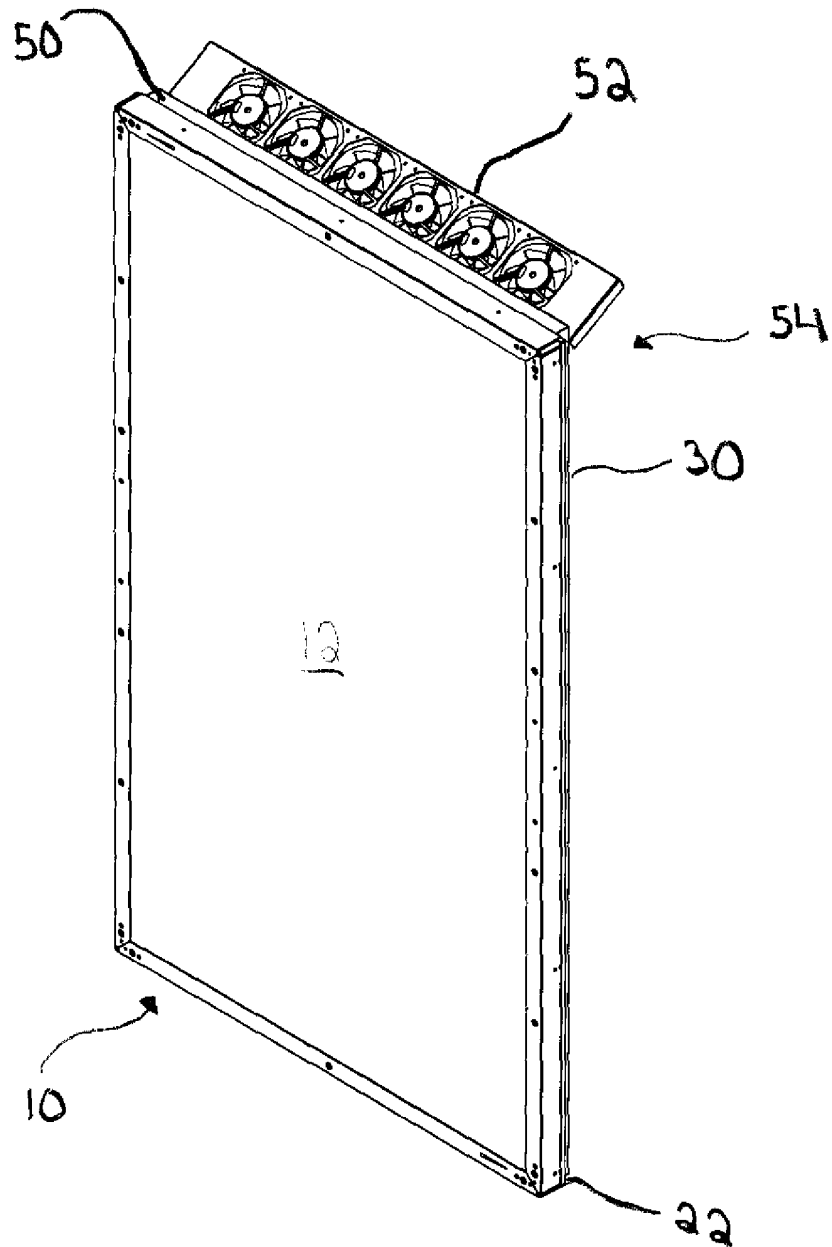

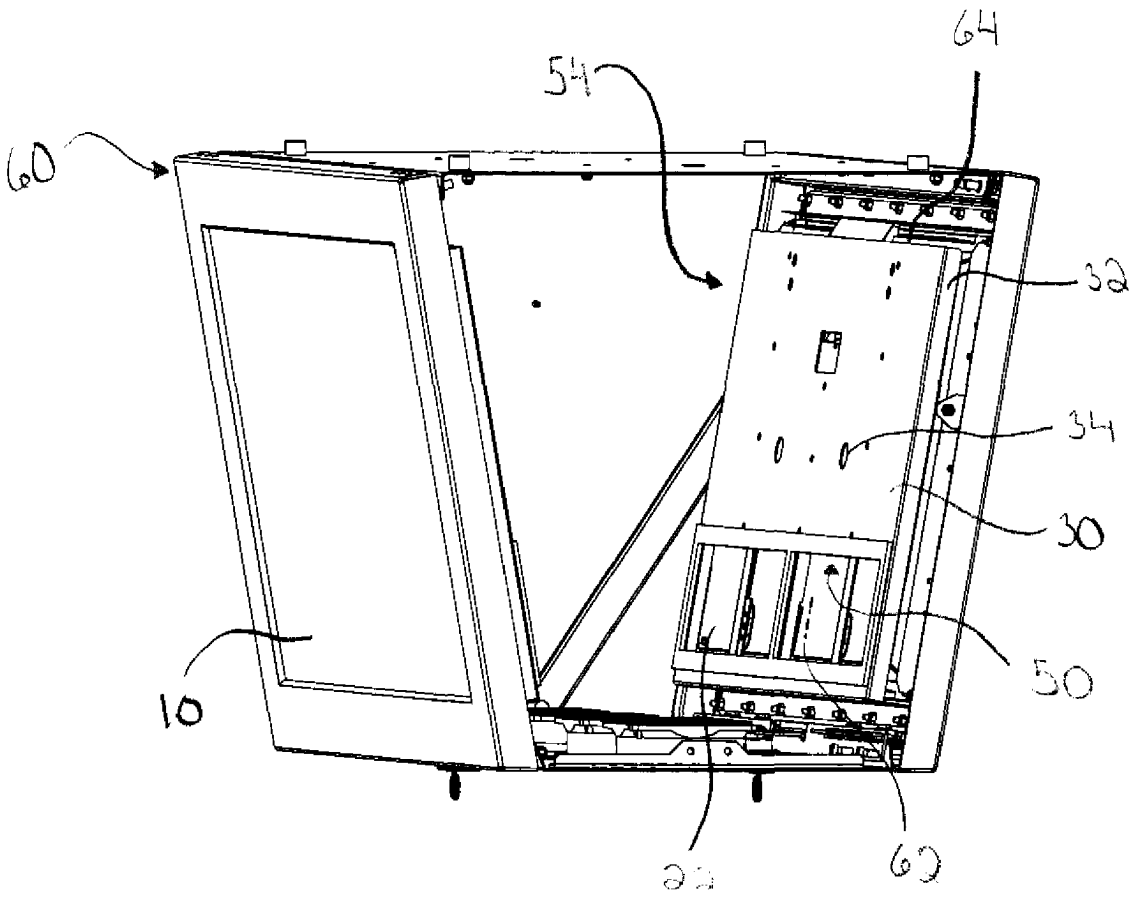

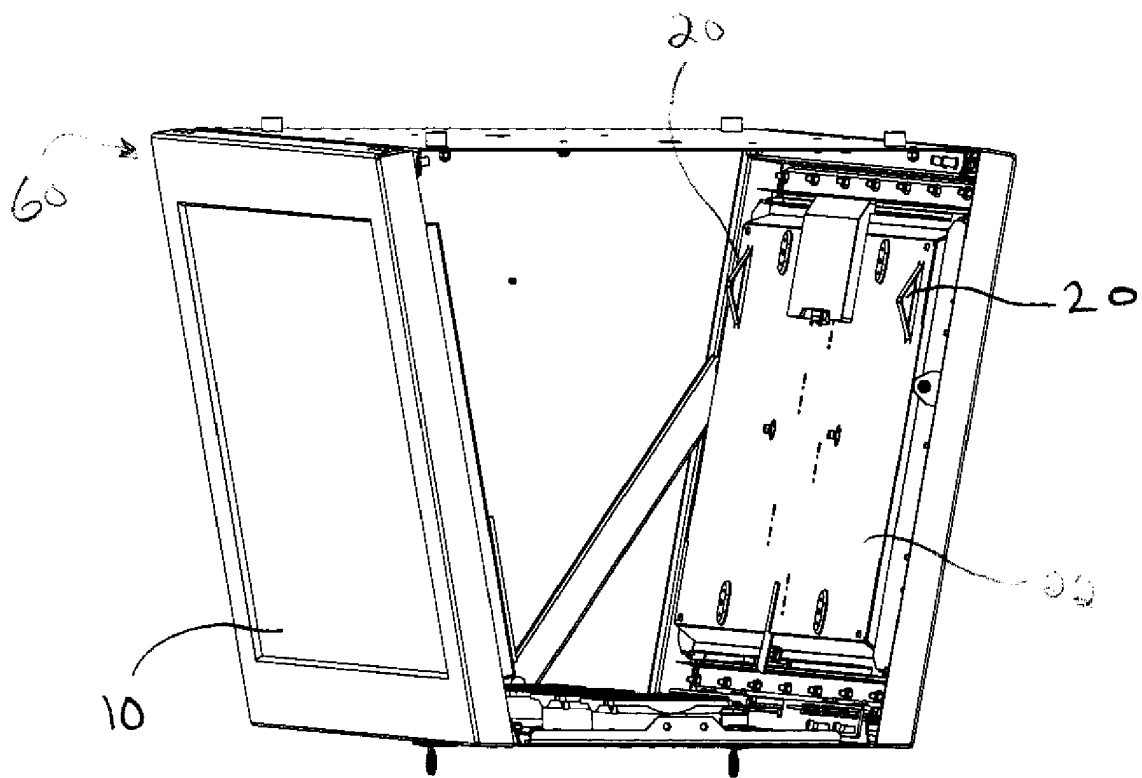


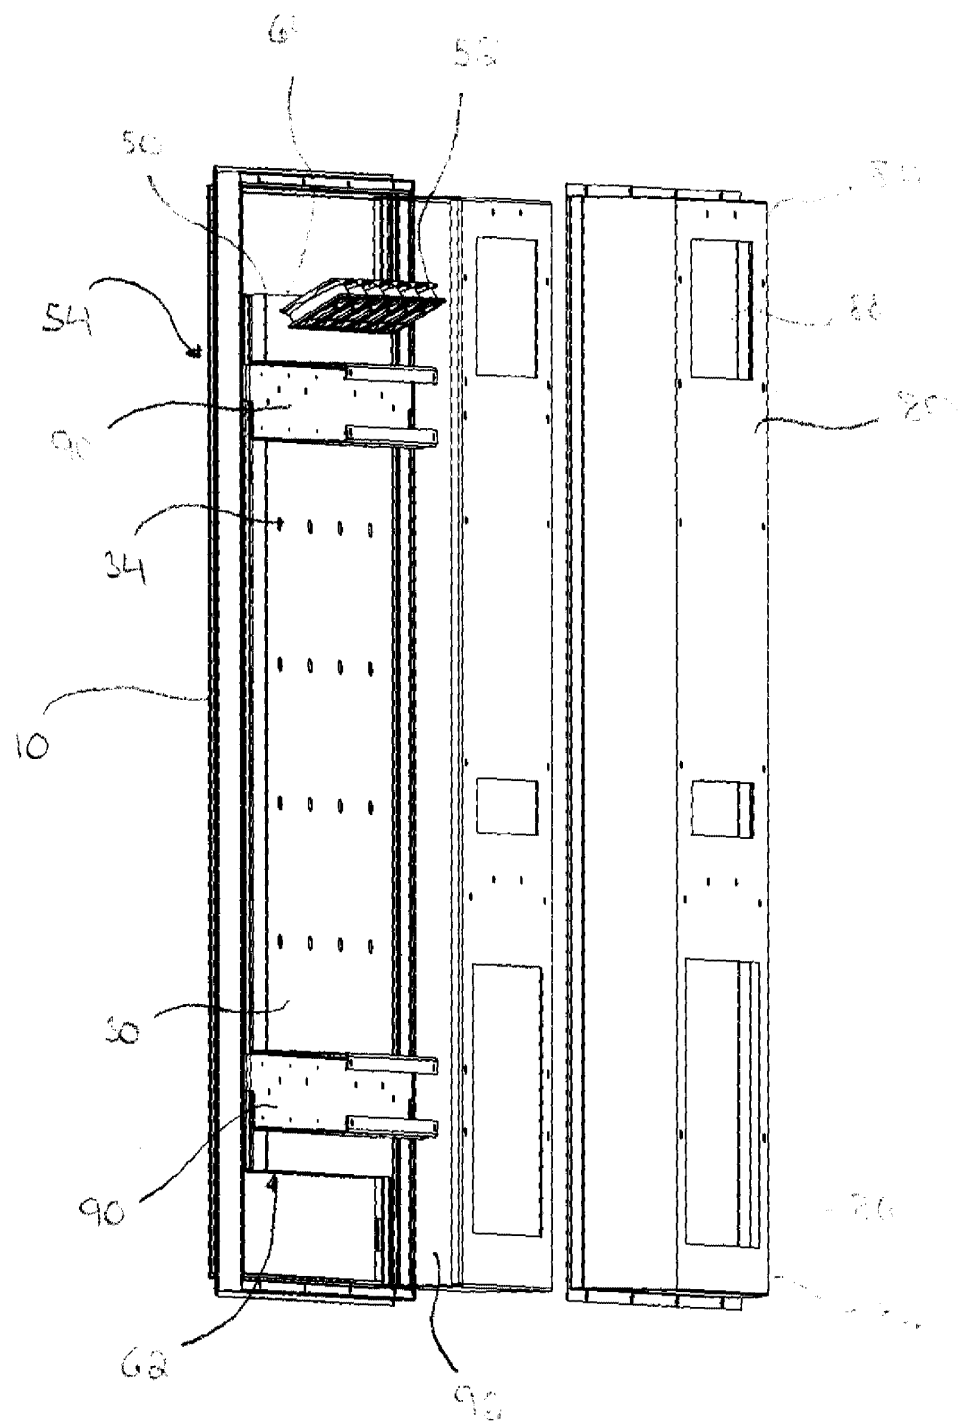


Fig. 8

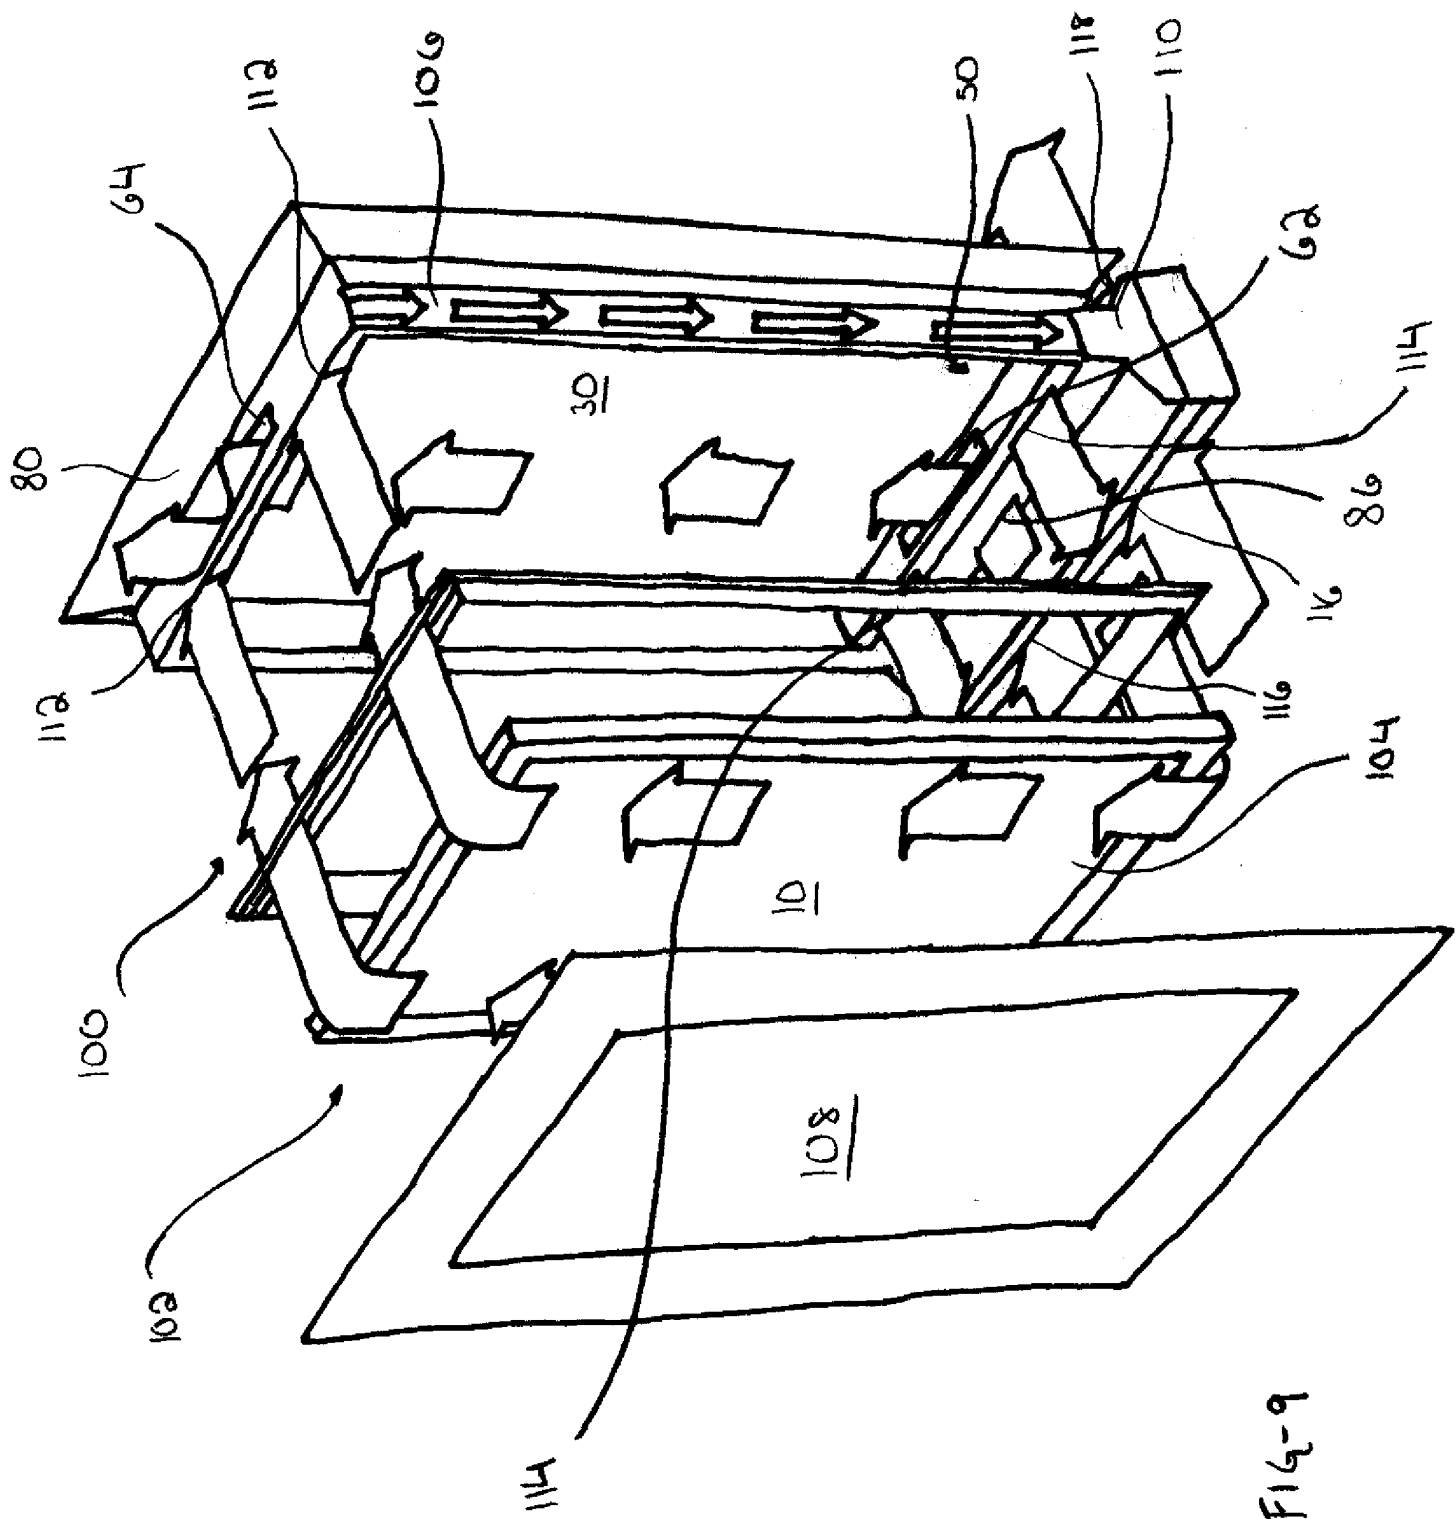

Provisional Application for Patent Cover Sheet

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c)

Inventor(s)

Inventor 1

Remove

Given Name

Middle Name

Family Name

City

State

Country i

William

Dunn

Alpharetta

GA

US

All Inventors Must Be Listed – Additional Inventor Information blocks may be generated within this form by selecting the **Add** button.

Add

Title of Invention

Constricted Convection Cooling System for an Electronic Display

Attorney Docket Number (if applicable)

MAN2241-011

Correspondence Address

Direct all correspondence to (select one):

☒ The address corresponding to Customer Number

☐ Firm or Individual Name

Customer Number

08698

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Entity Status

Applicant claims small entity status under 37 CFR 1.27

- ☐ Yes, applicant qualifies for small entity status under 37 CFR 1.27
- ☒ No

Warning

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

Signature

Please see 37 CFR 1.4(d) for the form of the signature.

Signature	/Mark R. Engle/			Date (YYYY-MM-DD)	Mar 26, 2008
First Name	Mark R.	Last Name	Engle	Registration Number (If appropriate)	58927

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **This form can only be used when in conjunction with EFS-Web. If this form is mailed to the USPTO, it may cause delays in handling the provisional application.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that : (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to a n other federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Electronic Patent Application Fee Transmittal

Application Number:

Filing Date:

Title of Invention:

CONSTRICTED CONVECTION COOLING SYSTEM FOR AN
ELECTRONIC DISPLAY

First Named Inventor/Applicant Name:

William Dunn

Filer:

Mark Ryan Engle/Emily Shultz

Attorney Docket Number:

MAN2241-011

Filed as Large Entity

Provisional Filing Fees

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Provisional application filing	1005	1	210	210

Pages:

Claims:

Miscellaneous-Filing:

Petition:

Patent-Appeals-and-Interference:

Post-Allowance-and-Post-Issuance:

Extension-of-Time:

Patent Owner Manufacturing Resources International, Inc.

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				210

Electronic Acknowledgement Receipt

EFS ID:	3052301
Application Number:	61039454
International Application Number:	
Confirmation Number:	7719
Title of Invention:	CONSTRICTED CONVECTION COOLING SYSTEM FOR AN ELECTRONIC DISPLAY
First Named Inventor/Applicant Name:	William Dunn
Customer Number:	08698
Filer:	Mark Ryan Engle/Emily Shultz
Filer Authorized By:	Mark Ryan Engle
Attorney Docket Number:	MAN2241-011
Receipt Date:	26-MAR-2008
Filing Date:	
Time Stamp:	10:46:35
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$210
RAM confirmation Number	6532
Deposit Account	194076
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)	Multi Message	Pages (if appl.)
	Patent Owner Manufacturing Resource International, Inc.				

1		Prov_Application.pdf	83372	yes	23
			71d8bab6969a7ffc7aea59e2337cce40fb514689		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	16	
	Claims		17	22	
	Abstract		23	23	
Warnings:					
Information:					
2	Drawings-only black and white line drawings	NewFigures.pdf	100758	no	9
			e75f1c9df5d89e19ac1afaab3d5fc3782f3c2e29		
Warnings:					
Information:					
3	Provisional Cover Sheet (SB16)	ProvisionalSB.pdf	1000251	no	3
			00a587ca7697be92d3fd2a0c63f7cf357cc8e2d6		
Warnings:					
Information:					
4	Fee Worksheet (PTO-06)	fee-info.pdf	8156	no	2
			e8b378fdc19ce18a31ed0d935a47528acdcafcdd		
Warnings:					
Information:					
Total Files Size (in bytes):			1192537		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY,DOCKET,NO	TOT CLAIMS	IND CLAIMS
61/039,454	03/26/2008		210	MAN2241-011		

CONFIRMATION NO. 7719

8698
STANDLEY LAW GROUP LLP
495 METRO PLACE SOUTH
SUITE 210
DUBLIN, OH 43017

FILING RECEIPT



OC000000029164050

Date Mailed: 04/02/2008

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Filing Receipt Corrections. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Applicant(s)

William Dunn, Alpharetta, GA;

Power of Attorney:

Mark Engle--58927

If Required, Foreign Filing License Granted: 03/28/2008

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 61/039,454**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No

Title

Constricted Convection Cooling System for an Electronic Display

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international

page 1 of 3

patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4158).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and

Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).