

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2007 (11.10.2007)

PCT

(10) International Publication Number
WO 2007/114716 A1

(51) International Patent Classification:
H04Q 7/20 (2006.01) **G01S 5/02** (2006.01)

(21) International Application Number:
PCT/NZ2007/000069

(22) International Filing Date: 2 April 2007 (02.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
546314 3 April 2006 (03.04.2006) NZ
548085 22 June 2006 (22.06.2006) NZ

(71) Applicant (for all designated States except US): **RESO-**
NANCE HOLDINGS LIMITED [NZ/NZ]; 3 Ventnor
Road, Remuera, 1050 Auckland (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WILLIS, Nicholas**
Hedley [NZ/NZ]; 3 Ventnor Road, Remuera, 1050 Auck-
land (NZ).

(74) Agent: **PARKER, Stephen Robert**; Lowndes Associates,
PO Box 7311, 1141 Auckland (NZ).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN,
IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR,
LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHODS FOR DETERMINING PROXIMITY BETWEEN RADIO FREQUENCY DEVICES AND CONTROL-
LING SWITCHES

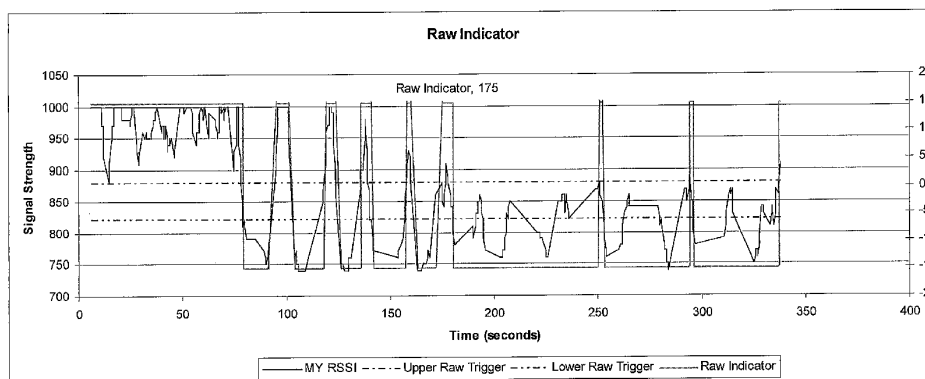

(57) Abstract: The invention relates to a method of determining the proximity of radio frequency devices using the analysis of a series of receive signal strength indicator (RSSI) values. In particular the invention further relates to a method for the control of a switch based on the proximity of the radio frequency devices.

WO 2007/114716 A1

METHODS FOR DETERMINING PROXIMITY BETWEEN RADIO FREQUENCY DEVICES AND CONTROLLING SWITCHES

FIELD OF THE INVENTION

- 5 The invention relates to a method of determining the proximity of a first radio frequency device to a second radio frequency device.

The invention further relates to a method for the control of a switch based on the proximity to each other of a first radio frequency device and a second radio frequency device.

10

BACKGROUND

RSSI is a measure of the signal strength between transmitting and receiving devices. RSSI is a measure of the strength (not necessarily the quality) of the received signal in a radio frequency environment.

- 15 RSSI is measured in arbitrary units. RSSI can be used internally in a radio frequency networking card to determine when the signal is below a certain threshold. This allows determination of the type of messages to send as well as the timing for those messages.

- 20 A radio frequency network monitoring tool can be used to measure the signal strength of a wireless network. From this a RSSI value can be determined. An end-user can determine an RSSI value when measuring the signal strength of a wireless network on a radio frequency network monitoring tool.

- RSSI values are used in a range of situations including the transmission of signals over wires and in various radio frequency technologies including the General Packet Radio Service (GPRS), Global System for Mobile Communications (GSM), Code division multiple access (CDMA), BluetoothTM, ZigBeeTM, Wifi 802.11x, and other Radio Frequency Identification (RFID) methods.
- 25

The value of RSSI measurements will vary depending on the implementation and the chosen scale, but is usually an integer value where a low value indicates a low signal strength. According to the IEEE802.11 standard:

5 *RSSI is intended to be used in a relative manner. Absolute accuracy of
the RSSI reading is not specified.*

When transmitting messages between devices the RSSI is a useful guide to the strength of the signal whether measured in Watts (W) or Decibels (dB).

While other factors come into play, distance has the greatest impact on signal strength in a radio frequency environment. In general, the strength of the signal (ss) is
10 understood to be proportional to the inverse square of the distance (d):

$$ss \propto 1/d^2$$

Signal strength (ss) and RSSI can be used as a guide to the distance between transmitting and receiving radio frequency devices.

RSSI is used in different ways depending on what the primary objective is.

15 When the transmission of messages is the aim, the relative distance of the transmitting and receiving devices is not important. Only the strength and quality of the signal is important in this case.

Where the proximity of two objects is the key criterion, for example with location based services or security applications, the strength of the signal is not important.

20 However, the relative physical locations of the objects will be important.

In each case, fluctuations in the RSSI are prevalent. These are due to various reasons including changes in distance, interference from external material such as wood or metal between the radio frequency devices, and environmental conditions.

25 In order to more fully exploit the use of radio frequency devices in the provision of location based services or security applications a need exists to determine the distance between such devices or relative change of distance between such devices, given the presence of these fluctuations.

The provision of location based services or security applications requires the operation of switches. Various means and mechanisms for remotely controlling switches are known. The remote control of switches can be used to allow or restrict access to buildings or premises. In addition, remote control devices are well known
5 for locking and unlocking cars, garages and the like. Further, remote control devices can be used in combination with electronic devices such as alarm systems, lights, televisions, stereos and DVD players.

Remote controls typically require some kind of action on the part of a user to operate them. There may be a button which a user has to depress in order to obtain operation
10 of the device, for example, the unlocking of a door. Alternately, the user may be required to put a key within a lock. These requirements can be inconvenient if the user has already got their hands full, for example, if they are carrying bags or other items or if a user is already operating another device, for example, driving a car.

Systems have been proposed which utilise the radio frequency technology
15 Bluetooth™ to allow operation of a switch. However, typically these systems require the device to be discoverable (visible to inquiry) and/or to connect to a specific application on a specific profile. An example of such a system is described in the specification accompanying international application no. PCT/SE01/00285 (publication no. WO 01/63425).

20 Wide scale utilisation of the radio frequency technology Bluetooth™ in the system described in WO 01/63425 has limitations as many Bluetooth devices are not permanently discoverable. Action is required on the part of the user to change the status of the device to make it discoverable.

It is an object of the invention to provide an improved method for determining the
25 proximity or relative changes in proximity between radio frequency devices.

It is an object of the invention to provide a method for controlling a switch based on the proximity or relative changes in proximity between radio frequency devices.

These objects are to be read disjunctively with the object to at least provide the public with a useful choice.

STATEMENTS OF INVENTION

In a **first** aspect the invention provides a method for determining the proximity to each other of radio frequency devices including the steps of:

- a receiving radio frequency device periodically measuring the RSSI value
5 of a transmitting radio frequency device to provide a series of results; and
- analysing the series of results using at least one technical indicator.

Preferably, the analysing the series of results includes determining the change in proximity to each other of the radio frequency devices.

Preferably, the at least one technical indicator is selected from the group consisting of:
10 an exponential moving average; a moving average convergence/divergence.

Preferably, the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.

Preferably, the two or more radio frequency devices operate in the 2.4 GHz radio bands

15 Preferably, the radio frequency devices support a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth™; ZigBee™; Wifi; 802.11x.

Preferably, the radio frequency devices support the Bluetooth™ radio frequency communication method.

20 Preferably, the transmitting and receiving radio frequency devices communicate in accordance with the Bluetooth™ specification.

Preferably, the periodically measuring the RSSI value of a transmitting radio frequency device occurs in the absence of a profile dependent connection being formed between the radio frequency devices.

25 Preferably, the transmitting radio frequency device is authenticated by Bluetooth™ pairing with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.

In a **second** aspect the invention provides a configuration of radio frequency devices including:

- a transmitting radio frequency device; and
- a receiving radio frequency device capable of functioning to periodically
5 measure the RSSI value of the transmitting radio frequency device to
 provide a series of results.

Preferably, the receiving radio frequency device is programmed to analyse the results using at least one technical indicator to determine the proximity of the transmitting and receiving devices.

- 10 Preferably, the analysing the results includes determining the change in proximity to each other of the radio frequency devices.

Preferably, the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.

- 15 Preferably, the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.

Preferably, the radio frequency devices are capable of operating in the 2.4 GHz radio bands

Preferably, the transmitting and receiving radio frequency devices are capable of communicating in accordance with the Bluetooth™ specification.

- 20 Preferably, the periodically measuring the RSSI value of a transmitting radio frequency device is capable of occurring in the absence of a profile dependent connection being formed between the two or more radio frequency devices.

- 25 Preferably, the transmitting radio frequency device is capable of being authenticated by Bluetooth™ pairing with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.

Preferably, the receiving device is capable of providing personal area networking connection to serve HTML pages to administer the configuration.

In a **third** aspect the invention provides a receiving radio frequency device capable of functioning to periodically measure the RSSI value of a transmitting radio frequency device to provide a series of results and programmed to analyse the results using at least one technical indicator to determine the proximity of the transmitting and receiving radio frequency devices.

Preferably, the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.

Preferably, the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.

10 Preferably, the receiving device operates in the 2.4 GHz radio bands.

Preferably, the receiving radio frequency device supports a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; BluetoothTM; ZigBeeTM; Wifi; 802.11x.

15 Preferably, the receiving radio frequency device supports the BluetoothTM radio frequency communication method.

Preferably, the receiving radio frequency device communicates in accordance with the BluetoothTM specification.

Preferably, the receiving radio frequency device provides personal area networking connection to serve HTML pages.

20 In a **fourth** aspect the invention provides a chip set solution for use in the manufacture of a radio frequency device providing functionality to periodically measure the RSSI value of a transmitting radio frequency device to provide a series of results and analyse the results using at least one technical indicator to determine the proximity of the transmitting radio frequency device.

25 Preferably, the analysing the results includes determining the change in proximity of the transmitting radio frequency devices.

Preferably, the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.

Preferably, the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.

Preferably, the chip set solution is for use in the manufacture of a radio frequency device operating in the 2.4 GHz radio bands.

- 5 Preferably, the chip set solution is for use in the manufacture of a radio frequency device supporting a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth[™]; ZigBee[™]; Wifi; 802.11x.

- 10 Preferably, the chip set solution is for use in the manufacture of a radio frequency device supporting the Bluetooth[™] radio frequency communication method.

In a **fifth** aspect the invention provides a method of operating a switch including the step of determining the proximity to each other of radio frequency devices.

Preferably, the determining the proximity includes the steps of:

- 15 a receiving radio frequency device periodically measuring the RSSI value of a transmitting radio frequency device to provide a series of results; and
analysing the results using at least one technical indicator.

Preferably, the analysing the series of results includes determining the change in proximity to each other of the radio frequency devices.

- 20 Preferably, the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.

Preferably, the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.

- 25 Preferably, the periodically measuring the RSSI value of a transmitting radio frequency device occurs in the absence of a profile dependent connection being formed between the radio frequency devices.

Preferably, the transmitting radio frequency device is authenticated (by Bluetooth™ pairing) with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.

5 Preferably, the receiving radio frequency device is administered by use of the exchange of Business Cards (OBEX profile).

Preferably, the receiving radio frequency device provides a personal area networking connection to serve HTML pages to administer the system.

Preferably, a signal from at least one of the radio frequency devices is generated in response to the change in proximity of the two or more radio frequency devices.

10 Preferably, authenticating identification information is obtained in response to a signal from at least one of the radio frequency devices.

Preferably, the authenticated identification information is shared with another system, application or process.

15 Preferably, the switch is actuated in response to a signal from at least one of the radio frequency devices.

Preferably, the signal from at least one of the radio frequency devices is generated when a predetermined proximity-threshold is reached.

The proximity-threshold can be determined by the user of the method depending on the specific requirements.

20 Preferably, the proximity-thresholds are dynamically tuned based on the occurrence of false positive incidents.

Preferably, the radio frequency devices are paired Bluetooth™ devices.

Preferably, the two or more radio frequency devices operate in the 2.4 GHz radio bands

25 Preferably, the radio frequency devices support a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth™; ZigBee™; Wifi; 802.11x.

Preferably, the radio frequency devices support the Bluetooth™ radio frequency communication method.

Preferably, the transmitting and receiving radio frequency devices communicate in accordance with the Bluetooth™ specification.

- 5 Preferably, devices include mobile telephones, laptops or other devices including a transmitting and receiving processor.

Preferably, the switch governs the opening or closing of a door selected from the group consisting of: a garage door; a car door; or a security door.

- 10 The switch may be operable to perform, directly or indirectly, various operations, including without limitation, an electrical or software switch turning a device or product on or off, opening or closing a door, releasing a catch, locking or unlocking a door or window or the like.

- Similarly the switch may be used in association with existing automatic door openers such as those which are commonly used in, for example, cars, garages, cat and dog
15 doors and at entrances to commercial or domestic premises.

Similarly the switch may be used to trigger another software application for application to other location based services such as mapping a device location, asset tracking, routing, proximity based messaging, including guides, advertising, ticketing, security and safety.

- 20 “Authentication” means the initiation by the switch controller of the remote device and involves the Bluetooth™ paging process.

“Bluetooth™” means the industrial specification for wireless personal area networks that provides a mechanism for exchanging information between cell phones, pocket PCs, PDAs and the like. The protocol centres around short range radio frequency.

- 25 “Discoverable device” means a device that responds to inquiry requests. Many devices are only temporarily discoverable and so can not be passively identified through inquiry.

“Pairing” means when two Bluetooth™ capable devices establish a trusted relationship through the standard Bluetooth mechanism.

“Periodically measuring” means repeatedly measuring a parameter at a pre-determined interval of time.

5 “Profile dependent connection” means a connection that is formed between two Bluetooth devices using one of the profiles (such as Serial Port or Headset) defined in the Bluetooth specification which occurs above the RFCOMM layer in the Bluetooth communication stack in Figure 6.

10 “Radio frequency device” means a device capable of transmitting or receiving electromagnetic waves at specified radio frequencies. Suitable devices may include mobile telephones/cellphones, cell towers, car and portable radios, GPS receivers, RFID readers and transmitters, laptops or other devices including a transmitting and/or receiving processor.

15 “Switch” means a device which directly or indirectly changes a device from one state to another. By way of example, a switch may change the state of a lock from locked to unlocked, or of an electronic device from on to off, or trigger an action in a program.

20 “Technical indicator” means the mathematical measures that are traditionally used in financial market analysis to study the historical prices over time of any type of traded security (stocks, commodities, etc.) to attempt to predict future prices. Here we show how these same indicators can be used with RSSI values to predict proximity in wireless systems.

25 “Undiscoverable device” means a device that is not discoverable as defined by the Bluetooth™ specifications (but may still communicate with devices with which it has previously communicated.)

Both “pairing” and “authentication” are core Bluetooth™ operations. These are universal in all Bluetooth™ capable devices.

An exemplary embodiment of the invention will now be described in detail with reference to the Figures of the accompanying drawings pages.

BRIEF DESCRIPTION OF FIGURES

Figure 1 – Graph presenting signal strength (raw data) versus time.

Figure 2 – Graph presenting moving average of signal strength versus time.

5

Figure 3 – Graph presenting resetting exponential average of signal strength versus time.

Figure 4 – Graph presenting MACD (26, 12, 9) of signal strength versus time.

10

Figure 5 – Graph presenting EMA (12) and MACD (26, 12, 9) of signal strength versus time.

Figure 6 – Schematic representation of the architecture of the existing radio frequency technology Bluetooth™.

15

Figure 7 – Schematic representation of switch control utilising the radio frequency technology Bluetooth™ proximity reader of the invention.

Figure 8 – Schematic representation of access control system utilising the radio frequency technology Bluetooth™ proximity reader of the invention.

20

Figure 9 – Representation of the process flow for an implementation of the method in a Bluetooth™ environment.

25

Figure 10 – Representation of the process of getting the next device for measurement.

DETAILED DESCRIPTION

Technical indicators used in the financial markets are applied to RSSI values to determine the proximity and movement of radio frequency devices relative to one another. Analysis of the RSSI values over time can be used to determine whether the

30

distance between the devices in increasing or decreasing, i.e. whether one of the devices is moving toward or away from the other device.

When dealing with moving objects and changing environments, proximity is not only related to signal strength, but also the changes in signal strength over time or the signal strength velocity and acceleration. The variations over time can be used to
5 determine direction of movement which when combined with distance provides a more accurate indicator of proximity.

One advantage of the invention is that it allows the relative proximity and movement of two or more radio frequency devices to be determined. The use of the technical
10 indicators, and particularly the exponential moving average and the moving average convergence divergence, allows the underlying trends in movement to be accurately and rapidly determined with a high degree of sensitivity without being affected by false indications caused by environmental fluctuations.

In radio frequency environments the signal strength can be influenced by the physical
15 surrounding. An object moving through the line of sight between the transmitting and receiving devices can have an impact on signal strength. Even a change in the signal reflection from surrounding objects can affect it. The challenge is to identify the underlying trends that relate to distance rather than these environmental fluctuations. This can be achieved through the use of technical indicators.

20 Although one of the advantages of the invention is that it may be employed in conjunction with known radio frequency devices, the manufacture of radio frequency devices specifically to use the invention is contemplated. In particular, the manufacture of radio frequency devices consisting of either (as opposed to both) a transmitting or receiving device is contemplated.

25 ***Technical Indicators***

Schmitt Trigger

By creating a buffer zone between the “in” and “out” of proximity boundaries the fluctuations of signal strength can be ignored. This is the basis of a Schmitt Trigger. Signal strength below a minimum are considered out of proximity, signal strength

above a maximum are considered within proximity and signal strength between the minimum and maximum are left unchanged in their previous state. In order to be effective the size of the buffer zone must be larger than the size of the environmental fluctuations that are to be ignored.

- 5 This is a simple approach. However if the fluctuations are of a significant size, the size of the required buffer will create a delay in detecting objects. If the objects are moving, this delay will create significant variations in distance.

Moving Averages

- By averaging over a history of readings the size of the fluctuations can be reduced and therefore the size of the buffer zone required in the Schmitt Trigger becomes smaller. The fluctuations can be reduced by increasing the number of periods that signal strength is averaged over, however this also increases dependence on historical values and increases the delay when responding to trends. This approach however requires a history of readings to be maintained and for mobile devices the ability to store this information is often limited.

- It would be advantageous if there was an accurate means for determining the proximity of moving transmitting and receiving devices on the basis of signal strength independent of random environmental induced fluctuations of signal strength with a minimum of processing and storage requirements. The system must also be able to handle discontinuities of lost signals.

Financial Technical Analysis

- A large amount of mathematical research has gone into identifying underlining trends in fluctuating values in stock markets and is covered by the broad area of financial technical analysis. By applying the principals of financial technical analysis to fluctuating signal strength values we can improve the identification of underlying trends and therefore improve the interpretation of signal strength as a measure of distance.

The challenge is to analyse the fluctuating data and thereby to identify trends and make predictions. By applying the analysis tools of financial technical analysis it is

possible to identify the trends of signal strength and in doing so measure proximity of the devices.

Leading Indicators

Leading indicators are designed to lead fluctuations. Most represent a form of momentum (or sustained velocity) over a fixed look-back period. The fixed look-back period is the number of periods used to calculate the indicator. Some of the more popular leading indicators include Commodity Channel Index (CCI), Momentum, Relative Strength Index (RSI), Stochastic Oscillator and Williams %R.

Even though many principles of technical analysis are universal, each signal set up has its own idiosyncrasies.

Momentum Oscillators

Many leading indicators come in the form of momentum oscillators. Momentum measures the rate-of-change of the fluctuating value. As the value rises, the momentum increases. The faster the values rise (the greater the period-over-period change), the larger the increase in momentum. Once this rise begins to slow, momentum will also slow. As the growth in value reduces, momentum starts to actually decline from previous high levels.

Lagging Indicators

As their name implies, lagging indicators follow the fluctuations and are commonly referred to as trend-following indicators. Rarely, if ever, will these indicators lead the fluctuation. Trend-following indicators work best when values develop strong trends. They are designed to identify a trend and maintain it as long as the trend is intact. Some popular trend-following indicators include moving averages (exponential, simple, weighted, variable) and moving average convergence/divergence (MACD).

The invention will now be illustrated with reference to the following example in which financial technical momentum indicators are applied to measurement of Bluetooth signal strength from a mobile phone from inside a stationery vehicle. In this embodiment of the invention the aim is to provide a proximity detection of the phone coming within 2 meters of the vehicle in any manner and from any direction.

The signal is affected by the different objects in the line of sight between the transmitter and receiver and financial technical analysis techniques where used to identify the underlying trends to remove these fluctuations.

5 **EXAMPLE**

Application of technical indicators to RSSI values

For illustration of this approach the movement of the transmitting device is represented in the graphs of Figures 1 to 5 (with the raw data appended to the description)

Time Range (seconds)	Description
0-80	Moving around within proximity
80-180	Moving into and out of range approximately every 15-20 seconds
180-340	Moving into edge of range approximately every 60 seconds

10

With this one set of data five different formulae will be used to determine proximity, each one with an appropriately tuned Schmitt trigger to produce the same general level of detection. It will become clear that while they will all detect the same general behaviour of moving in and out of proximity, the use of financial technical indicators
 15 will improve the responsiveness of detection without increasing the false positives.

In this case the relative signal strength has a maximum of 1000 and a minimum detectable strength of approximately 740. This range has been used to achieve three significant figures of accuracy while using integers. In each case, the solid line represents the indicator under consideration, dash-dot represents the upper trigger
 20 point, dash-dot-dot represents the lower trigger point, and dashed line represents the

proximity detection. The scale for proximity detection is positive is within proximity, negative is out of proximity and zero is within the hysteresis of the Schmitt Trigger.

The five indicators considered are

1. Raw Values (refer Figure 1)
- 5 2. Moving Average(6) Indicator (refer Figure 2)
3. Resetting Exponential Moving Average (12) Indicator (refer Figure 3)
4. Moving Average Convergence Divergence (26, 12, 9) Indicator (refer Figure 4)
5. Combined Indicator (refer Figure 5)

Raw Values

- 10 Raw values of signal strength were used with a Schmitt trigger of (880, 820) to create an indicator. Any reduction in the size of the buffer zone would produce a significant number of false positives.

Moving Average

- 15 In this case a moving average of 6 previous values with a Schmitt trigger of (860,840) was used. The moving average is calculated as follows.

$$\text{Moving Average (n)} = \text{Sum(Previous n values)}/n$$

- 20 The same general behaviour produced for the Raw Indicator can be reproduced with a smaller trigger range. However, the cost of this is an increased time lag. With the moving average proximity is detected at 177 seconds, rather than the 175 seconds detected by the raw indicator.

Exponential Moving Average (EMA)

- 25 In order to reduce the time lag in simple moving averages, we can use exponential moving averages (also called exponentially weighted moving averages or EMAs). EMAs reduce the lag by applying more weight to recent values relative to older values. The weighting applied to the most recent value depends on the specified

period of the EMA. The shorter the EMA period, the more weight that will be applied to the most recent value. As such, EMAs will react quicker to recent changes than a simple moving average. The calculation formula is as follows.

$$\text{EMA}(\text{current}) = ((\text{Price}(\text{current}) - \text{EMA}(\text{prev})) \times \text{Multiplier}(\text{N})) + \text{EMA}(\text{prev})$$

5 Where

$$\text{Multiplier (N periods)} = 2 / (1 + \text{N periods})$$

EMAs also have the advantage that they can be calculated from one current and one history value reading. Unlike the simple moving average there is no need to store N previous values.

- 10 In signal strength, a value reading is not always available. Unlike stock prices, when the signal strength is so low to be beyond detection there will be no values available. EMAs are cumulative and include a contribution (at ever decreasing weighting) of all the historical values. A discontinuity in the values disrupts averaging. For this reason, we have used a *resetting* EMA where the average is returned to the raw value if the signal strength reading is lost. In location based terms, this equates to
- 15 losing the position of the transmitting device, and making no assumptions on its current movement from it's last known position.

In this case, a resetting EMA of over a range of 12 was used with a Schmitt trigger of (860,840).

- 20 Again the general detection of proximity was the same as before however there is a the significant improvement in sensitivity triggering at 172 seconds rather than 175 and 177 for the raw and moving average indicators, respectively, without any false positives.

Moving Average Convergence Divergence (MACD)

- 25 There are a number of leading momentum formulae that could have been used such as Commodity Channel Index (CCI), Rate of Change, Relative Strength Index (RSI), Stochastic Oscillator and Williams %R. We selected MACD due to its ability to be

calculated without the need to maintain a history of values and ability to handle discontinuities of lost signals.

The most popular formula for the "standard" MACD is the difference between a 26-period and 12 period exponential moving averages. These values can be altered to come up with a MACD that is better suited for faster or slower signal strengths. Using shorter moving averages will produce a quicker, more responsive indicator, while using longer moving averages will produce a slower indicator, less prone to whipsaws. For our purposes in this discussion 12/26 MACD will be used for explanations.

- 10 Of the two moving averages that make up MACD, the 12-day EMA is the faster and the 26-day EMA is the slower.

$$\text{MACD}(i,j) = \text{EMA}(j) - \text{EMA}(i)$$

In stock analysis, closing prices are used to form the moving averages. For signal strength, each value is equally important so every value is used right back to the previous discontinuity of a lost signal. A 9-day EMA of MACD is plotted along side to act as a trigger line. This creates an acceleration rather than velocity measure (see below). For stock analysis the goal is to identify the changes of increasing and decreasing signals. In proximity measure the goal is to include the velocity of transmitting device. If the transmitting device has a velocity towards the receiving device, the signal strength will be increasing, the fast 12 period EMA will respond quicker than the slower 26 period EMA and MACD will be positive. Conversely a negative MACD indicates the transmitting device is moving away.

The relative movement of the objects can be used to create a proximity trigger. If the transmitting device is near (but not in range) and it is moving towards the receiver then it can be considered to have already moved into the required proximity. In mathematical terms this becomes: if the MACD is positive and fast resetting EMA is close to the upper Schmitt Trigger then the device is within range. In this case we used a MACD trigger value of +1 (moving slightly towards) and just out of range EMA(12) signal of 840. The out of proximity range used the smoothed EMA(9) of MACD value of -30 (definitely moving away) and just in range EMA(12) value of 880.

- There are two key points on this graph (Figure 4) that demonstrate the early detection of a object moving into range. The first is at 118 seconds and the second at 233 seconds. This corresponds to the values of 119 and 251 from using EMA indicator alone. However the situation of moving slowly into range at 293 seconds was not detected. MACD is a measure of velocity and in this case the velocity was not high enough to create a positive MACD.

Combined Indicator

By combining the velocity sensitive MACD indicator and the distance sensitive EMA indicator we get the benefits of both approaches resulting in the optimal indicator.

- These have been combined by using the proximity triggers from MACD(26,12,9) and if there are no triggers then use the triggers from EMA(12). This particular embodiment relates to the signal strength of Bluetooth receiver inside a car and external Bluetooth transmitting device. The parameters used in this example equate to a proximity range of 2 meters range outside the car.
- When these indicators are combined there are 6 trigger points as defined below.

Trigger Name	Example values	Description
RSSI_in_range_towards	840	The RSSI trigger that indicates in range trigger when combined with MACD triggers.
RSSI_out_of_range_away	880	The RSSI trigger that indicates out of range trigger when combined with MACD triggers.
MACD_towards	+1	MACD trigger that indicators moving towards.

MACD_away	-30	MACD trigger that indicators moving away.
RSSI_in_range	890	The RSSI trigger that indicates in range.
RSSI_out_of_range	840	The RSSI trigger that indicates out of range.

Trigger Rules

When these triggers are combined they can be used in the following rules to measure proximity.

5

Situation	Criteria	Result
1. Strongly towards and near	MACD(26,12) >= MACD_towards and RAW_RSSI >= RSSI_in_range_towards and EMA(12) >= RSSI_out_of_range (to avoid whip saw to Situation 5)	Device In Range
2. Strongly away and distant	MACD(26,12) < MACD_away and EMA(26) < RSSI_out_of_range_away and EMA(12) < RSSI_in_range (to avoid whip saw to Situation 3)	Device Out of Range.

3. In range	EMA(12) >= RSSI_in_range	Device In Range
4. Within the buffer zone	EMA(12) < RSSI_in_range and EMA(12) >= RSSI_out_of_range	Device In Buffer.
5. Just out	EMA(12) < RSSI_out_of_range	Device Out of Range.

Trigger Conditions

In order to prevent whipsaws the triggers must obey the following conditions.

Condition	Reason
RSSI_in_range > RSSI_out_of_range > RSSI_disconnect	To cover the full range of possible RSSI values.
RSSI_in_range_towards >= RSSI_out_of_range	To prevent fluctuations in MACD values with the same RSSI value moving between Situation 1 and 5
RSSI_out_of_range_away < RSSI_in_range	To prevent fluctuations in MACD moving between case 2 and 3
RSSI_in_range_towards <= RSSI_in_range	To enable the moving towards trend to open earlier than by considering RSSI alone.
RSSI_out_of_range_away >= RSSI_out_of_range	To enable the moving away trend to close earlier than by considering RSSI alone.
RSSI_in_range_towards <= RSSI_out_of_range_away	This is a recommendation rather than a condition.

Other Indicators

There are a number of other formula, thresholds and techniques that can also be used to further improve the sensitivity of proximity detection from signal strength.

Quality of Signal

- 5 A reduced signal quality can be an indicator of an obstruction which can reduce the measured signal strength while the distance is unchanged. By measuring both RSSI and Signal Quality, a more accurate representation of proximity can be achieved by increasing the measured signal strength in proportion to the reduced signal quality.

Period of averaging

- 10 The period at which the EMA are calculated can be adjusted to the volatility of the signal strength received. The lower the number of periods and the more sensitive the detection will be. The challenge is to avoid the false positives.

Trigger values

- 15 Level of trigger thresholds are dependent on the proximity required and the relative values of RSSI obtained. The size of the buffer zone will also affect the sensitivity of detection. These all have to be tuned for the specific implementation.

In addition to MACD there are number of other velocity measures that are also situation for this type of proximity measurement.

Rate of change (ROC)

- 20
$$ROC = (Current\ RSSI - RSSI\ n\ periods\ ago) / (RSSI\ n\ periods\ ago)$$

This indicator is similar to MACD but requires a history of values to be maintained and can not handle discontinuities of lost signals and is therefore not as useful as MACD.

Relative Strength Index (n periods)

- 25
$$Average\ Gain = Sum(gains\ over\ n\ periods) / n$$

Average Loss = Sum(losses over n periods)/n

$$RS = \frac{(\text{Previous Average Gain} * (n-1) + \text{Current Average Gain})}{(\text{Previous Average Loss} * (n-1) + \text{Current Average Loss})}$$

$$RSI = 100 - 100 / (1 + RS)$$

- 5 (Developed by J. Welles Wilder in 1978) this is useful for detecting over bought and over sold signals however these do not translate to proximity measures.

Stochastic Oscillator

- Developed by George C. Lane in the late 1950s, the Stochastic Oscillator is a momentum indicator that shows the location of the current close relative to the high/low range over a set number of periods. Closing levels that are consistently near the top of the range indicate accumulation (buying pressure) and those near the bottom of the range indicate distribution (selling pressure).

$$\%K = \frac{100 * (\text{Recent Close} - \text{Lowest Close over } n \text{ periods})}{(\text{Highest High over } n \text{ periods} - \text{Lowest Low over } n \text{ periods})}$$

- 15 When %K is greater than a threshold such 80% the latest value of the signal strength is close to the maximum including the signal strength is close to its maximum over recent times and if nearby this can indicate proximity.

This indicator is similar to ROC and MACD but requires a history of values to be maintained and is therefore not as useful as MACD.

20 *Williams %R*

Developed by Larry Williams, Williams %R is a momentum indicator that works much like the Stochastic Oscillator.

$$\%R = \frac{100 * (\text{Highest over } n \text{ periods} - \text{Recent close})}{(\text{Highest High over } n \text{ periods} - \text{Lowest Low over } n \text{ periods})}$$

- 25 This indicator is similar to ROC and MACD but requires a history of values to be maintained and is therefore not as useful as MACD.

Commodity Channel Index (CCI)

Developed by Donald Lambert, the Commodity Channel Index (CCI) was designed to identify cyclical turns in commodities. The assumption behind the indicator is that commodities (or stocks or bonds) move in cycles, with highs and lows coming at
 5 periodic intervals.

There are 4 steps involved in the calculation of the CCI:

Calculate the last period's Typical Strength (TS) = $(H+L+M)/3$ where H = high, L = low, and M = median.

10 Calculate the n-period Simple Moving Average of the Typical Strength (SMATS).

Calculate the Mean Deviation. First, calculate the absolute value of the difference between the last period's SMATS and the typical strength price for each of the past n periods. Add all of these absolute values together and divide by n to find the Mean Deviation.

15 The final step is to apply the Typical Strength (TS), the Simple Moving Average of the Typical Strength (SMATS), the Mean Deviation and a Constant (.015) to the following formula:

$$CCI = (\text{Typical Strength} - \text{SMATS}) / (0.015 * (\text{Mean Deviation}))$$

20 This may be applicable if the transmitter and receiver have a cyclically proximity, but in a random situation this will not help.

Acceleration measures

Acceleration measure or a change in velocity can be calculated by the difference between the current velocity and the (exponential) moving average of the velocity. This can be applied to MACD, Stochastic Oscillators and Williams %R. Using
 25 acceleration indicators introduces leading characteristics into these lagging momentum indicators. This can be used to further improve the sensitivity of the indicators described above and therefore increasing accuracy.

Value	Indication
Positive	Accelerating towards
Zero	Constant Velocity
Negative	Accelerating away

Combination of Indicators

With increasing sensitivity there is a risk of increasing false positives for proximity. By using a combination of individual indicators described above, the increased sensitivity can be managed by requiring multiple confirmations from multiple
5 indicators.

Application to Control of Switches

Figure 6 displays standard Bluetooth™ architecture. This can be divided into two main levels as shown in Figure 6 by the dotted lines.

The information contained below the dotted line represents generic Bluetooth™
10 architecture which is core to Bluetooth™ functionality. These events will occur regardless of the particular Bluetooth™ device being used.

This action above the line represent specific profiles and implementations. These are device specific. That is, two devices must be compatible or have compatible software or profiles loaded on each of them to allow communication between two devices. In
15 general, profiles are specific to a manufacture or device provider.

The present invention utilises the core Bluetooth™ functionality. In this way compatibility issues can be avoided. The Bluetooth™ remote device is paired with the Bluetooth™ processor in the switch controller. In this way, a trusted relationship is formed with the devices.

In subsequent contacts, the Bluetooth™ switch controller will initiate an authentication with the remote Bluetooth™ device. In the traditional Bluetooth™ context this authentication request represents a prelude to establishing a full connection between two or more Bluetooth™ devices.

- 5 In the present invention a full connection does not need to be formed. Instead, the receipt of an authentication request by the switch controller triggers operation of the switch.

By utilising the authentication request in this manner the requirements for establishing a connection and complication arising from the need to have equivalent or compatible
10 Bluetooth™ versions and profiles on each of the device and the processor are avoided.

The clock offset and page scan mode are maintained for each Bluetooth™ remote device to improve the speed of the pairing requests. Bluetooth™ range indicators such as RSSI values and Link Quality can be obtained during the pairing process and
15 can be used to refine the range.

By keeping the Access Control Lists open after successful Authentication RSSI values can continue to be read until they are timed out. Once the Access Control Lists are closed these indicators are lost unless a profile specific connection is established.

Repeating the Authentication process enables RSSI values to re-read and used to
20 determine proximity of the devices. Once pairing is completed (successfully or otherwise) these indicators are lost unless a profile specific connection is established.

Figure 7 describes the switch controller set up in the a preferred embodiment of a single lock configuration. The switch controller (1.1) includes an antenna (1.3) together with a Bluetooth™ processor (1.4). The antenna may require an external
25 low noise amplifier for increased sensitivity. The controller additionally includes some persistent memory (1.5).

The controller (1.1) is connected to a switch mechanism (1.8) and a power supply (1.9). The switch controller (1.1) sends regular authentication requests to its known trusted devices stored in persistent memory (1.5).

When a Bluetooth™ remote device (1.2) comes into range of the antenna (1.3) it responds to the authentication request and validates its location and authenticity. This occurs whether the remote device is discoverable or not. The receipt of this request is processed by the processor (1.4) and the switch mechanism is triggered.

- 5 In the preferred embodiment the switch controller may also include an inquiry button (1.6) and an awake sensor (1.7). The inquiry button is used to initiate the pairing process between the Bluetooth™ processor (1.4) in the controller (1.1) and Bluetooth™ remote device (1.2).

- 10 On pressing the button the Bluetooth™ processor within the controller (1.1) will send an inquiry to any discoverable Bluetooth™ remote device (1.2) that is in range. The Bluetooth™ remote device (1.2) responds and the pairing process is initiated.

- The pairing process will be well known to those familiar with Bluetooth™ technology. Once pairing is complete the processor (1.4) and the Bluetooth™ device (1.2) will enjoy a trusted relationship. After that, the sending of an authentication response by the Bluetooth™ remote device to an authentication request from the Bluetooth™ processor with an appropriate RSSI value indicating proximity will be sufficient to trigger the switch unlock response. Continuous or extended readings of RSSI values can be obtained by maintain the Access Control List open and repeating the authentication.
- 15

- 20 The inquiry button is preferably located within a secured location. There must be some mechanism for allowing the initial inquiry between the Bluetooth™ processor in the switch controller and the Bluetooth™ remote device. If there is no such mechanism, there will be no pairing and hence no authentication request can be generated.

- 25 In addition, the switch controller may feature an awake sensor. The awake sensor is a mechanism to conserve battery-life within the switch controller or minimise power usage. It is envisaged that the awake sensor will change the switch controller from a sleep mode to an awake mode. The non-authenticating awake sensor can comprise any mechanism which is triggered by the proximity of a vehicle or person to the device. In addition it may be linked to a clock on a timer mechanism. Examples of possible awake sensors include motion detectors and vibration detectors.
- 30

More than one Bluetooth™ remote device may be paired with the Bluetooth™ processor. Subsequent pairings can be mediated by use of the inquiry button. The pairing details are stored in the persistent memory in the controller and are accessible on demand.

- 5 The inquiry button can also be used as the basis of administration for the Bluetooth™ processor for altering pairing information and configuration values. Additional external wired (Ethernet, RS232) and wireless connection (NFC, ZigBee, GSM, GPRS, Radio Frequency, WiFi) can also be used to administer the system remotely.

- 10 In a preferred embodiment at least one of the Bluetooth™ remote devices will be an administrator device or have administrator privileges. For the administrator device it will be necessary to support one of the standard Bluetooth™ profiles on the device.

- The administrator device will need to form an authenticated and encrypted profile connection to exchange information with the Bluetooth™ processor to change the details in the persistent memory. For example, the addition or deletion of Bluetooth™
15 devices from the approved pairing list or change the PIN.

In particular, the PIN may be changed using any device that supports the business card exchange profile or Object Push Profile (OPP). The switch controller will be moved into inquiry mode which will also enable the OPP and PAN profiles with Bluetooth encryption.

- 20 The remote device can send a business card via the OPP profile to the switch controller where is the old PIN as the first name and new PIN as the second name. On receiving this business card the switch controller will stop inquiring, check the old PIN and if it matches, all authenticated devices will be removed from the stored memory and PIN changed. Once this is complete the switch controller will inquiry
25 for devices in range and request authentication to store them in the persistent store again.

- The full range of administration functions including creating temporary PIN, changing PIN, manual intervention (see below) deleting individual remote devices, changing transmission power, returning to factory settings, as well parameters changing the
30 interface to the locking and unlocking mechanism can be administrated from a remote

device that supports the personal area networking (PAN) profile. This is typically a computer or personal digital assistant.

In the same way as for the basic administration with the OPP profile an encrypted PAN connection can be established with the switch controller. The remote device can then access dynamic WML/HTML pages served by the switch controller to administer the functions of the switch controller. These dynamic WML/HTML pages can be used to display values from the persistent store as well as post values to the switch controller for updating them.

Figure 8 displays an alternative to the system envisaged in Figure 7. The access control is centralised. This is very similar to the centralised security systems we see today in various buildings. The actual controller includes an antenna (2.4), a Bluetooth™ processor (2.5) and persistent memory (2.6). It is similar to the unit described in Figure 7. However, a centralised access controller holds the information as to who is able to access the specific premises or areas.

Specifically, a Bluetooth™ switch controller is connected in between a traditional passive proximity reader and the access controller. The authorisation request is intercepted by the Bluetooth™ switch controller when it is sent from the proximity reader to the access controller.

At that point the Bluetooth™ switch controller inquires for any discoverable Bluetooth remote devices that are in range. If they are the switch controller authenticates with the remote device and stores the remote device Bluetooth™ address, link key and proximity authorisation request.

When switch controller returns the repeated authorisation mode, and whenever an authenticated remote device is in range, the associated authorisation request is sent to the access controller as if the proximity reader had done it itself.

Once a remote device has been authenticated by the switch controller, it requests a connection of a specific profile such as serial port profile, headset profile etc. Most (but not all) Bluetooth™ devices support one of these profiles and can alert if another device tries to connect. This is request to connect is accepted by the remote device,

the switch controller is notified and able to undertake a manually initiated process, such as open a gate.

After a defined number of authentications the pairing could be removed requiring the user to undergo the PIN entry and authentication process with the card again. The
5 PIN could be associated with the card number to avoid having to distribute the PIN.

It is envisaged that the Bluetooth™ switch controllers of the present invention could replace the existing card readers used in many buildings at present. As a transition strategy, it is envisaged the two systems will work in an integrated way. When the card reader is used for the first time after installation of the Bluetooth™ switch
10 controller, it will trigger an inquiry from the switch controller. This will lead to a pairing between the controller and the remote device carried by the user.

By adding a Bluetooth™ switch controller in between the proximity reader and the access control system an association between a Bluetooth™ remote device and authorisation request can be stored. There are no changes required to central access
15 control system, either in terms of software or hardware and only the installation of a Bluetooth™ switch controller with each proximity reader.

The management of the access rights is the unchanged and registration of the remote device is undertaken by the user without the need for central building management to be involved which is important for shared offices. This provides dual support for both
20 technologies. The distribution of the PIN is not an issue as the user requires the security card as well.

The access control credential information linked to the card that triggered the inquiry can thus be linked to the concomitant pair formation. When an authenticated Bluetooth™ remote device is in range the associated access control credential
25 information is sent to the security system for authorisation. The access control credential information may also be the link key of the Bluetooth™ pairing.

Those skilled in the art will appreciate that the invention is useable in a wide range of applications. Without wishing to limit the possible uses of the invention, examples of where the core invention may be used include home automation systems, access

control systems, gates, garages, vehicles, electronic consumer devices, security and alarm systems.

The invention is advantageous as it allows a single Bluetooth™ remote device to be used to operate a plurality of switches in a secure way. In addition, each controller
5 can recognise a number of remote devices.

The use of core Bluetooth™ functionality enables the invention to be used with a broad range of Bluetooth™ capable devices and avoids the incompatibility issues suffered by predecessor devices.

In addition, the process is automatic, in that, the switch will be triggered when the
10 remote device comes within a certain distance of the controller. This allows for hands free operation.

The analysis of RSSI values can be combined with the use of Bluetooth™ devices as described above to determine their proximity to each other. In addition the Bluetooth™ pairing protocol can advantageously be used to increase security.

15 The use of raw RSSI values and moving averages within Schmitt riggers to detect proximity based on RSSI values leads either to false positives or slower response time. The use of the EMA and MACD of RSSI values within Schmitt triggers enables more accurate determination of the proximity of the transmitting device relative to the receiving device.

20 The indicators allow determination of whether the devices are coming closer together or moving further apart. The inclusion of a rate of change or acceleration analysis allows account to be taken of how quickly the proximity of the devices is changing.

Further reduction in failed triggers can be achieved by the inclusion of feedback mechanisms. For example negative feedback associated with unlocking a door would
25 be a door not being opened. This can be used to dynamically tune the trigger values to minimise the occurrence of false triggers.

This combination leads to significantly quicker response times in terms of operating the switch. In addition, the incidence of false positives, or the triggering of the switch due to the change of signal propagation rather than proximity, can be decreased.

General Process Implementation

Referring to Figure 9 the process flow for an implementation of the method in a Bluetooth™ environment is provided. The following table indicates the statuses of transmitting devices. Referring to Figure 10 the process of getting the next device for measurement is described.

Status	Description	Usual Action
Tried and failed	We have tried to authenticate this device and it has been unsuccessful. This may be due to incorrect PIN or it moved out of range. This device will be ignored unless an Inquiry is restarted.	Ignore this device. Reset the list of Tried and Failed devices every time a user reinitiates an Inquiry.
New	The device has been found and it is not in Known nor has it failed authentication during Inquiry.	Authenticate device and measure range.
Known	This device has authenticated in the past and is stored in memory but it is not currently Seen.	Measure range.
Seen	This is a Known device has been seen and its range measured.	Measure range

Example of Implementation for a Garage

Referring to Figure 7 the following table highlights the implementation for a garage unit followed by a summary of the steps of operation.

Component Reference	Implementation
1.1	This is a 4 layer printed circuit board with surface mount components.
1.2	Bluetooth capable cell phones, headsets or hands free car kits.
1.3	2 dBm antenna with 24dBm Low Noise Amplifier for increased sensitivity and therefore range.
1.4	Cambridge Silicon Radio Bluecore 04 Ext BGA chip.
1.5	8MBit Flash memory

1.6	Radio frequency module to record wireless wall station button or wired wall station button to close once arrived or open when leaving.
1.7	None required as mains powered.
1.8	Relay that provides a toggle message to the garage door controller.
1.9	AC/DC converter from either 110Volts or 240Volts to 3.3 Volts.

- 1) Register transmitting device with receiving device.
- 2) Press the wall unit button to open garage door to leave.
- 3) Record that the in range device is leaving.
- 5 4) Close the garage door when the in range device is out of range.
- 5) Open the garage door when the in range device is within range.
- 6) Press the wall unit button to close the garage once arrived.
- 7) Record that the in range device is at home and no longer requires monitoring.

Example of Implementation for a Car

- 10 Referring to Figure 7 the following table highlights the implementation for a car unit followed by a summary of the steps of operation.

Component Reference	Use in car implementation
1.1	This is a 4 layer printed circuit board with surface mount components.
1.2	Bluetooth capable cell phones, headsets or hands free car kits.
1.3	2 dBm antenna with 24dBm Low Noise Amplifier for increased sensitivity and therefore range.

1.4	Cambridge Silicon Radio BlueCore 04 Ext BGA chip.
1.5	8MBit Flash memory
1.6	This inquiry button is a combination of a physical button on the dash, and switches connected to the door and ignition.
1.7	This is a combination of the switches connected door and ignition. For example sleep when the ignition is on and wake when the ignition is off.
1.8	This powers for example the central door locking, window closing, flashing lights, sounding the horn, arming and disarming the alarm system.
1.9	A DC/DC 12 volt to 3.3 Volt converter.

- 1) Register transmitting device with receiving device.
- 2) Unlock the car doors and disarm when a registered device is within range.
- 3) Avoid any locking once a door is opened.
- 5 4) Stop monitoring once the ignition is on.
- 5) Start monitoring devices once the ignition is off.
- 6) Avoid any locking until all doors are closed or an .
- 7) Lock doors and arm once the registered device that was in range moves out of range.

Example of Implementation for a Door

Referring to Figure 7 the following table highlights the implementation for a door unit followed by a summary of the steps of operation.

Component Reference	Use in door implementation
1.1	This is a 4 layer printed circuit board with surface mount components.
1.2	Bluetooth capable cell phones, headsets or hands free car kits.
1.3	2 dBm antenna with 24dBm Low Noise Amplifier for increased sensitivity and therefore range.
1.4	Cambridge Silicon Radio BlueCore 04 Ext BGA chip.
1.5	8MBit Flash memory
1.6	This inquiry button is a button for the manual release of the door.
1.7	This is not required for a mains powered unit.
1.8	This powers an electronic strike, mortice or magnetic lock configurable either in fail/safe or fail/secure modes.
1.9	A DC/DC 12 volt to 3.3 Volt converter.

- 5 1) Register transmitting device with receiving device.
- 2) Unlock the door when a registered device is within range.
- 3) Lock the door when no registered devices are within range.

Example of Implementation for Access Control

Referring to Figure 8 the following table highlights the implementation for a access control unit followed by a summary of the steps of two alternative operations.

Component Reference	Use in access control implementation
2.1	This is a 4 layer printed circuit board with surface mount components.
2.2	Bluetooth capable cell phones, headsets or hands free car kits.
2.3	Proximity read with Wiegand interface.
2.4	2 dBm antenna with 24dBm Low Noise Amplifier for increased sensitivity and therefore range.
2.5	Cambridge Silicon Radio BlueCore 04 Ext BGA chip
2.6	8MBit Flash memory.
2.7	This is a door controller of a building access control system which communicated.

- 5 1) Register transmitting device with Access control system as virtual proximity card.
- 2) When the receiving detects a Bluetooth device create a Wiegand message for a virtual proximity card.
- 3) The receiving devices trasnmits virtual Wiegand message to access controller.

10 Or

- 1) Register transmitting device with Access control system as virtual proximity card.

- 2) Deploy receiving device with same address as central access control system.
- 3) When the receiving device detects a transmitting device, it requests requests the private link key from the Access control system to authenticate the transmitting device.
- 5 4) Once the transmitting device is authenticated send authorisation request to building access controller.

Although the invention has been described by way of exemplary embodiments it should be appreciated that variations and modifications may be made with out departing from the scope of the invention. Furthermore where known equivalents exist to specific features, such equivalents are incorporated as if specifically referred to in this specification.

10

Raw Data

Time	RSSI
6	1000
7	1000
7	1000
7	1000
8	1000
8	1000
8	1000
8	1000
9	1000
9	1000
9	1000
10	1000
10	1000
10	1000
11	1000
11	1000
11	970
12	970
12	960
12	930
12	920
15	880
15	910
15	910
16	950
16	960
16	970
17	970
17	990

Time	RSSI
17	1000
18	1000
18	1000
18	1000
19	1000
19	1000
19	1000
20	1000
20	1000
20	1000
21	1000
21	990
21	990
21	980
24	980
24	980
24	980
25	980
25	970
25	980
25	980
26	990
26	990
26	1000
26	1000
27	1000
27	1000
27	1000

Time	RSSI
27	990
28	940
28	940
28	930
28	930
29	910
29	930
29	920
29	920
31	960
32	950
32	950
32	950
33	960
33	960
33	960
33	950
34	950
34	950
35	950
35	950
35	950
35	960
36	970
36	970
36	980
37	980
37	990
37	990

Time	RSSI
38	1000
38	1000
40	960
40	970
41	970
41	950
41	950
41	970
42	970
42	950
42	970
43	950
43	950
43	930
43	940
44	940
44	940
44	950
44	940
45	950
45	950
45	950
46	920
46	930
46	930
49	1000
49	1000
49	1000
50	1000
50	1000
50	1000

Time	RSSI
50	1000
51	1000
51	1000
51	990
51	990
52	1000
52	1000
52	1000
53	1000
53	1000
53	1000
54	1000
54	1000
54	1000
54	1000
55	990
55	960
57	940
57	960
58	960
58	970
58	980
58	990
59	1000
59	1000
59	1000
59	1000
60	990
60	1000
60	980
61	990

Time	RSSI
61	1000
61	1000
62	970
62	970
62	970
63	950
63	960
63	990
66	980
66	970
66	970
67	960
67	950
67	960
68	960
68	990
68	990
68	1000
69	1000
69	1000
69	990
70	1000
70	1000
70	980
70	990
71	1000
71	1000
71	1000
72	1000
72	1000
72	1000

Time	RSSI
75	900
75	930
75	930
76	940
76	990
76	1000
76	1000
77	1000
77	960
77	940
77	940
78	920
78	920
78	880
79	850
79	830
79	830
79	810
80	820
80	810
80	810
81	790
81	790
81	790
82	790
82	790
82	790
82	790
83	790
83	790
83	790

Time	RSSI
84	790
84	790
84	790
85	790
89	770
89	770
89	770
90	760
90	760
90	760
90	750
91	760
95	900
95	920
95	920
96	970
96	990
96	1000
97	1000
97	1000
97	1000
98	1000
98	1000
98	1000
99	1000
99	1000
99	1000
100	1000
100	1000
101	1000

Time	RSSI
101	970
101	960
104	760
104	760
104	760
105	770
105	750
105	750
106	750
106	750
106	740
107	740
107	740
107	740
108	740
108	740
108	740
108	740
109	740
109	740
118	850
118	870
118	870
119	910
119	950
119	960
120	970
120	970
120	970
121	970
121	990

Time	RSSI
121	1000
122	1000
122	1000
122	990
123	990
123	990
123	940
124	900
124	900
124	860
126	750
126	750
127	750
127	750
127	750
128	740
128	740
128	740
129	740
129	740
129	740
130	740
130	760
130	760
131	760
131	760
136	870
136	880
136	900
137	900
137	910

Time	RSSI
138	950
138	980
138	970
139	930
139	920
139	920
139	880
140	870
140	870
140	820
141	820
141	820
141	820
142	790
142	790
142	770
154	760
154	770
154	770
155	780
155	780
155	780
156	790
156	800
156	800
156	790
157	820
157	840
157	840
158	890
158	890

Time	RSSI
158	900
159	930
159	930
160	920
160	880
163	740
163	740
164	740
164	740
165	740
165	740
165	740
166	750
166	750
166	750
167	750
167	750
167	750
168	760
168	770
169	760
172	860
175	880
175	850
176	840
176	860
177	880
177	900
177	910
178	890
178	890

Time	RSSI
178	880
179	860
179	840
180	840
180	820
180	800
181	780
190	810
190	790
191	810
191	830
192	830
192	840
192	850
193	850
193	850
193	860
194	850
194	830
195	820
195	800
195	790
196	770
203	760
204	760
204	770
205	770
205	790
206	800
206	830
207	820

Time	RSSI
207	840
208	850
208	850
221	800
222	800
222	790
223	790
223	790
224	780
224	780
225	770
225	760
226	760
231	850
232	850
232	850
233	850
233	860
234	860
234	830
235	860
235	850
236	830
236	820
249	870
250	870
250	870
251	880
251	860
252	850
252	850

Time	RSSI
253	810
253	790
254	770
254	760
260	770
261	780
261	780
262	780
262	810
263	830
263	830
264	840
264	850
265	860
265	840
279	840
280	820
280	810
281	820
281	810
282	780
282	770
283	770
283	750
284	750
284	740
292	870
293	870
293	850
294	870
294	890

Time	RSSI
295	860
295	850
296	850
296	800
297	780
297	780
310	790
311	790
311	790
312	810
312	830
313	860
313	860
314	870
314	860
315	870
315	830
325	750
326	760
326	770
327	770
327	760
328	780
328	800
329	840
329	840
330	840
330	830
333	810
334	830
334	840

Time	RSSI
335	810
336	830
336	870
337	860
337	880
338	910

CLAIMS

- 1) A **method** for determining the proximity to each other of radio frequency devices including the steps of:
- a receiving radio frequency device periodically measuring the RSSI value of a transmitting radio frequency device to provide a series of results; and
 - analysing the series of results using at least one technical indicator.
- 2) The method of claim 1 where the analysing the series of results includes determining the change in proximity to each other of the radio frequency devices.
- 3) The method of claim 1 where the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.
- 4) The method of claim 1 where the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.
- 5) The method of claim 1 where the two or more radio frequency devices operate in the 2.4 GHz radio bands
- 6) The method of claim 1 where the radio frequency devices support a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth[™]; ZigBee[™]; Wifi; 802.11x.
- 7) The method of claim 6 where the radio frequency devices support the Bluetooth[™] radio frequency communication method.
- 8) The method of claim 7 where the transmitting and receiving radio frequency devices communicate in accordance with the Bluetooth[™] specification.

- 9) The method of claim 1 where the periodically measuring the RSSI value of a transmitting radio frequency device occurs in the absence of a profile dependent connection being formed between the radio frequency devices.
- 10) The method of claim 1 where the transmitting radio frequency device is authenticated by Bluetooth™ pairing with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.
- 11) A **configuration** of radio frequency devices including:
- a transmitting radio frequency device; and
 - a receiving radio frequency device capable of functioning to periodically measure the RSSI value of the transmitting radio frequency device to provide a series of results.
- 12) The configuration of claim 11 where the receiving radio frequency device is programmed to analyse the results using at least one technical indicator to determine the proximity of the transmitting and receiving devices.
- 13) The configuration of claim 12 where the analysing the results includes determining the change in proximity to each other of the radio frequency devices.
- 14) The configuration of claim 12 where the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.
- 15) The configuration of claim 12 where the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.
- 16) The configuration of claim 11 where the radio frequency devices are capable of operating in the 2.4 GHz radio bands

- 17) The configuration of claim 11 where the transmitting and receiving radio frequency devices are capable of communicating in accordance with the Bluetooth™ specification.
- 5 18) The configuration of claim 11 where the periodically measuring the RSSI value of a transmitting radio frequency device is capable of occurring in the absence of a profile dependent connection being formed between the two or more radio frequency devices.
- 10 19) The configuration of claim 11 where the transmitting radio frequency device is capable of being authenticated by Bluetooth™ pairing with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.
- 20) The configuration of claim 11 where the receiving device is capable of providing personal area networking connection to serve HTML pages to administer the configuration.
- 15 21) A **receiving radio frequency device** capable of functioning to periodically measure the RSSI value of a transmitting radio frequency device to provide a series of results and programmed to analyse the results using at least one technical indicator to determine the proximity of the transmitting and receiving radio frequency devices.
- 20 22) The receiving radio frequency device of claim 21 where the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.
- 23) The receiving radio frequency device of claim 21 where the at least one technical indicator is a combination of an exponential moving average and
25 a moving average convergence/divergence.
- 24) The receiving radio frequency device of claim 21 where the receiving device operates in the 2.4 GHz radio bands.
- 25) The receiving radio frequency device of claim 21 where the receiving radio frequency device supports a radio frequency communication method

selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth™; ZigBee™; Wifi; 802.11x.

- 26) The receiving radio frequency device of claim 25 where the receiving radio frequency device supports the Bluetooth™ radio frequency communication method.
- 27) The receiving radio frequency device of claim 26 where the receiving radio frequency device communicates in accordance with the Bluetooth™ specification.
- 28) The receiving radio frequency device of claim 21 where the receiving radio frequency device provides personal area networking connection to serve HTML pages.
- 29) A **chip set solution** for use in the manufacture of a radio frequency device providing functionality to periodically measure the RSSI value of a transmitting radio frequency device to provide a series of results and analyse the results using at least one technical indicator to determine the proximity of the transmitting radio frequency device.
- 30) The chip set solution of claim 29 where the analysing the results includes determining the change in proximity of the transmitting radio frequency devices.
- 31) The chip set solution of claim 29 where the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.
- 32) The chip set solution of claim 29 where the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.
- 33) The chip set solution of claim 29 where the chip set solution is for use in the manufacture of a radio frequency device operating in the 2.4 GHz radio bands.

- 34) The chip set solution of claim 29 where the chip set solution is for use in the manufacture of a radio frequency device supporting a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth[™]; ZigBee[™]; Wifi; 802.11x.
- 35) The chip set solution of claim 34 where the chip set solution is for use in the manufacture of a radio frequency device supporting the Bluetooth[™] radio frequency communication method.
- 36) A **method** of operating a switch including the step of determining the proximity to each other of radio frequency devices.
- 37) The method of claim 36 where the determining the proximity includes the steps of:
- a receiving radio frequency device periodically measuring the RSSI value of a transmitting radio frequency device to provide a series of results; and
 - analysing the results using at least one technical indicator.
- 38) The method of claim 36 where the analysing the series of results includes determining the change in proximity to each other of the radio frequency devices.
- 39) The method of claim 36 where the at least one technical indicator is selected from the group consisting of: an exponential moving average; a moving average convergence/divergence.
- 40) The method of claim 36 where the at least one technical indicator is a combination of an exponential moving average and a moving average convergence/divergence.
- 41) The method of claim 36 where the periodically measuring the RSSI value of a transmitting radio frequency device occurs in the absence of a profile dependent connection being formed between the radio frequency devices.

- 42) The method of claim 36 where the transmitting radio frequency device is authenticated (by Bluetooth™ pairing) with the receiving radio frequency device but is undiscoverable during the periodically measuring the RSSI value.
- 5 43) The method of claim 36 where the receiving radio frequency device is administered by use of the exchange of Business Cards (OBEX profile).
- 44) The method of claim 36 where the receiving radio frequency device provides a personal area networking connection to serve HTML pages to administer the system.
- 10 45) The method of claim 36 where a signal from at least one of the radio frequency devices is generated in response to the change in proximity of the two or more radio frequency devices.
- 46) The method of claim 36 where authenticating identification information is obtained in response to a signal from at least one of the radio frequency devices.
- 15 47) The method of claim 46 where the authenticated identification information is shared with another system, application or process.
- 48) The method of claim 36 where the switch is actuated in response to a signal from at least one of the radio frequency devices.
- 20 49) The method of claim 48 where the signal from at least one of the radio frequency devices is generated when a predetermined proximity-threshold is reached.
- 50) The method of claim 49 where the proximity-thresholds are dynamically tuned based on the occurrence of false positive incidents.
- 25 51) The method of claim 36 where the radio frequency devices are paired Bluetooth™ devices.
- 52) The method of claim 36 where the two or more radio frequency devices operate in the 2.4 GHz radio bands

- 53) The method of claim 36 where the radio frequency devices support a radio frequency communication method selected from the group consisting of: General Packet Radio Service; GSM; CMDA; Bluetooth[™]; ZigBee[™]; Wifi; 802.11x.
- 5 54) The method of claim 53 where the radio frequency devices support the Bluetooth[™] radio frequency communication method.
- 55) The method of claim 54 where the transmitting and receiving radio frequency devices communicate in accordance with the Bluetooth[™] specification.
- 10 56) The method of claim 36 where devices include mobile telephones, laptops or other devices including a transmitting and receiving processor.
- 57) The method of claim 36 where the switch governs the opening or closing of a door selected from the group consisting of: a garage door; a car door; or a security door.
- 15 58) A **method** of operating a switch substantially as described in the Examples provided in the specification with reference to the Figures of the accompanying drawings pages.

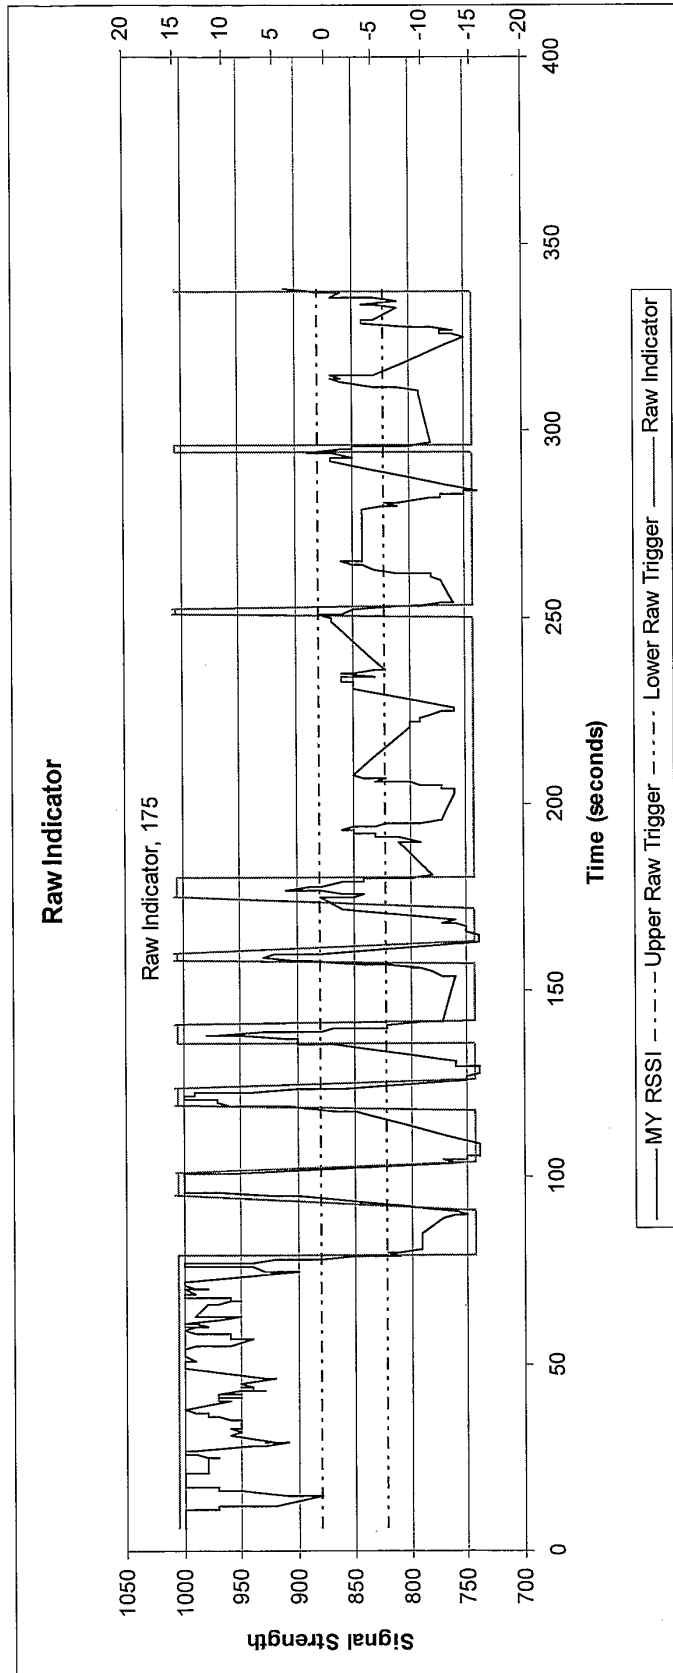


FIGURE 1

1/10

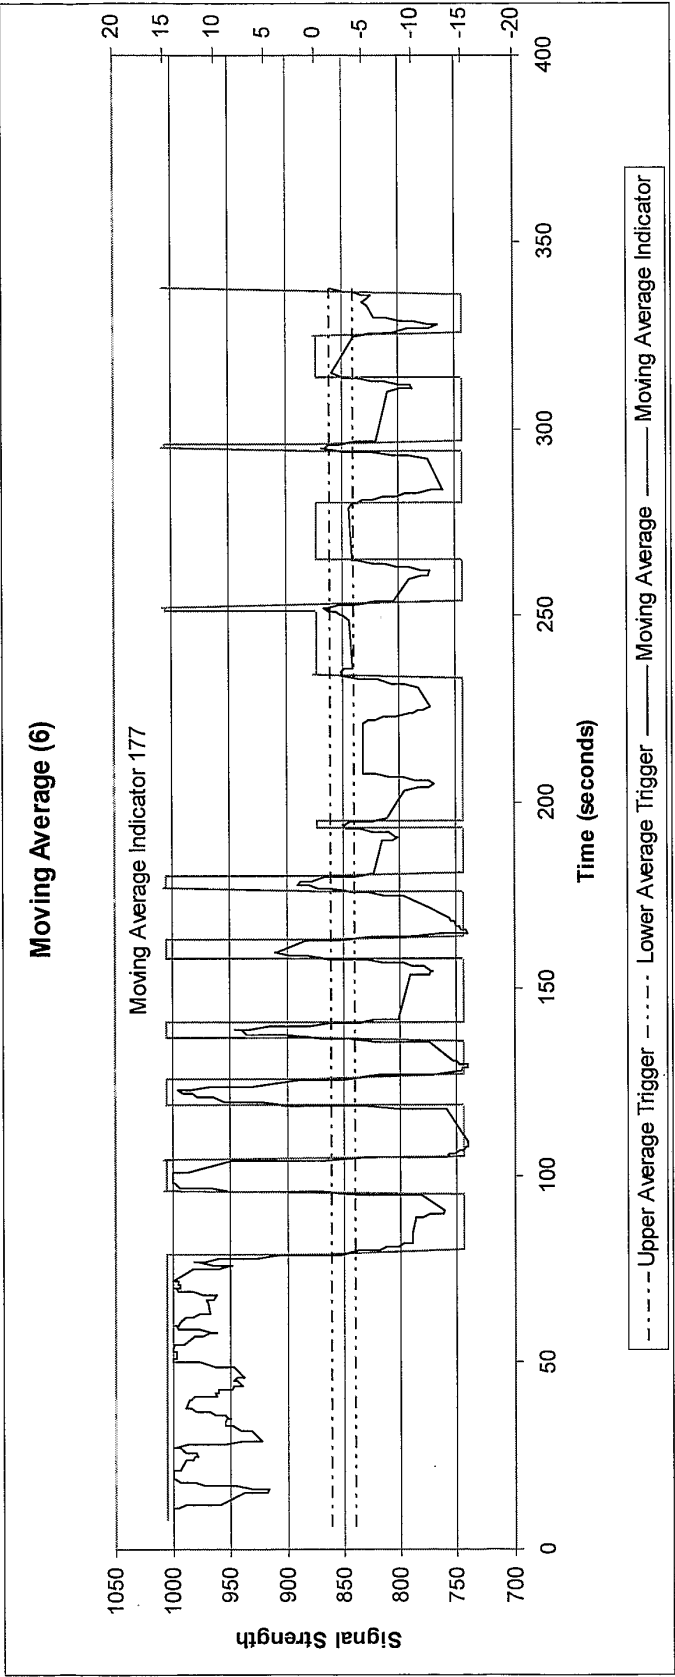


FIGURE 2

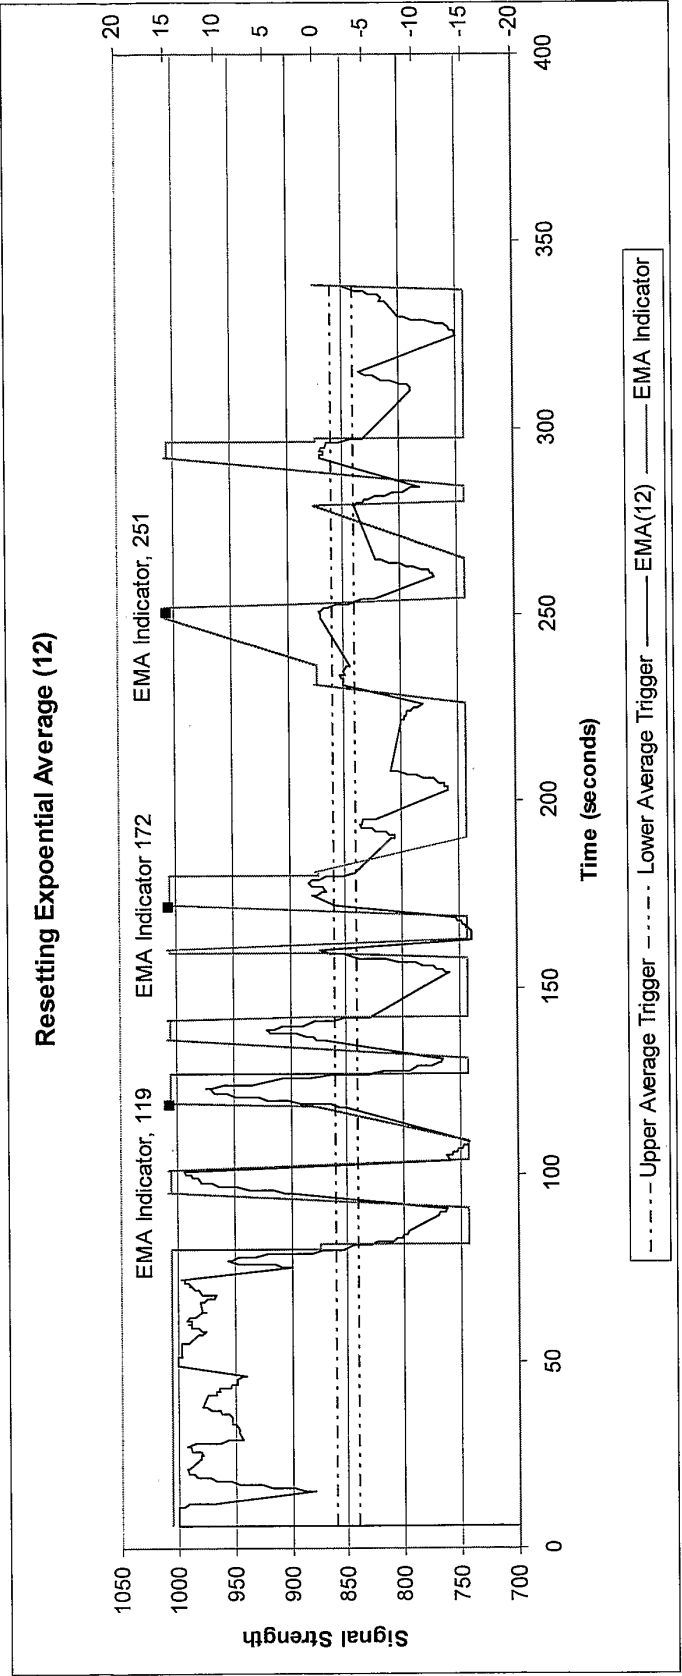


FIGURE 3

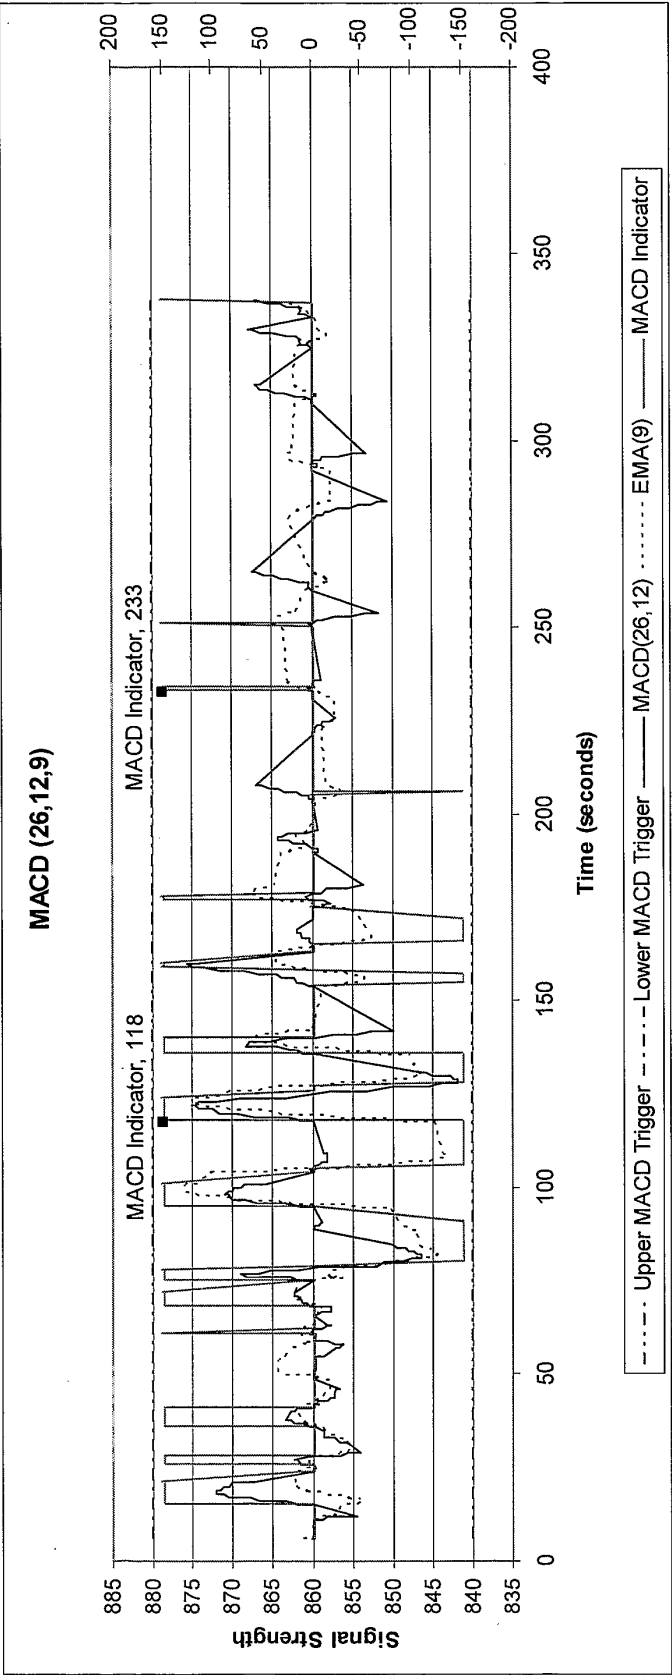


FIGURE 4

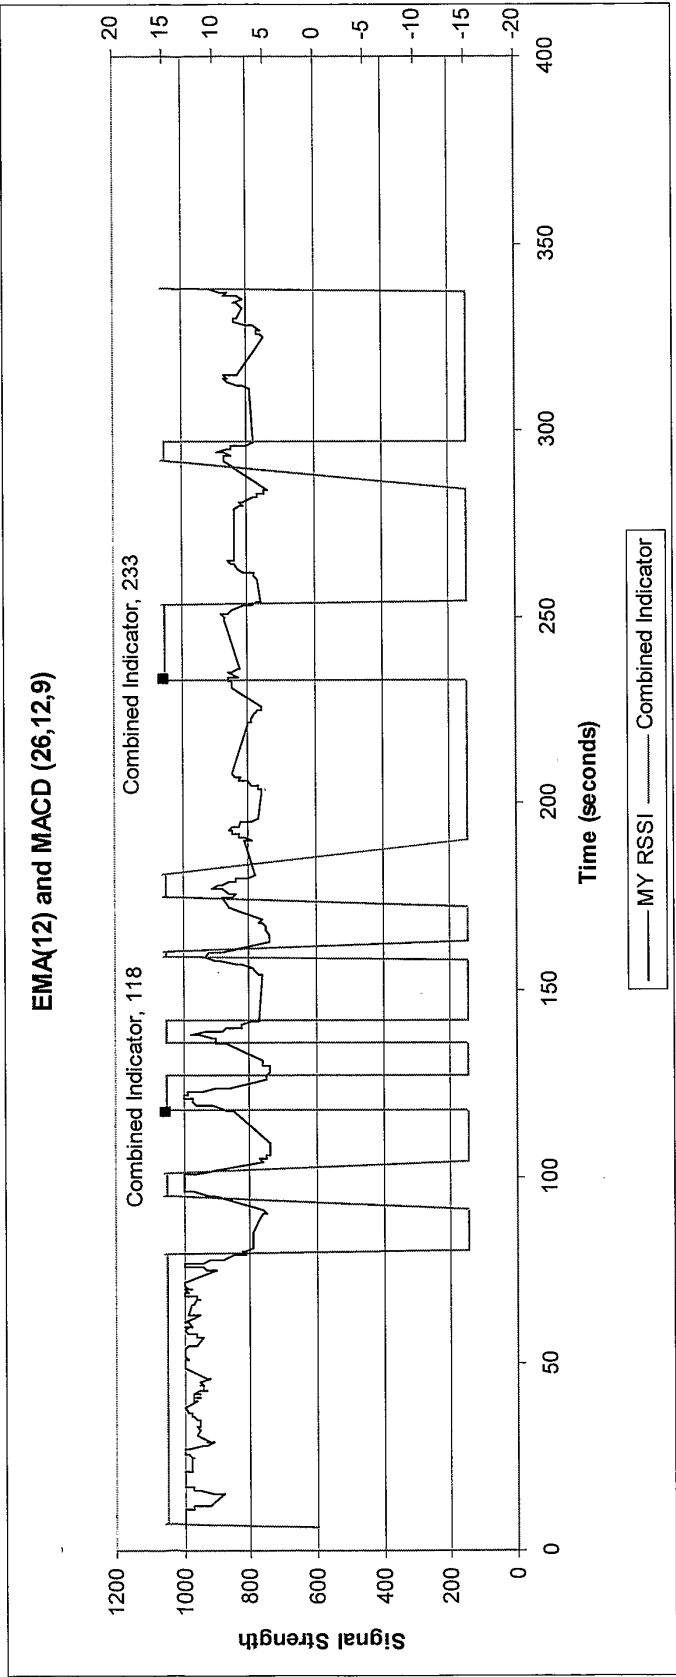


FIGURE 5

5/10

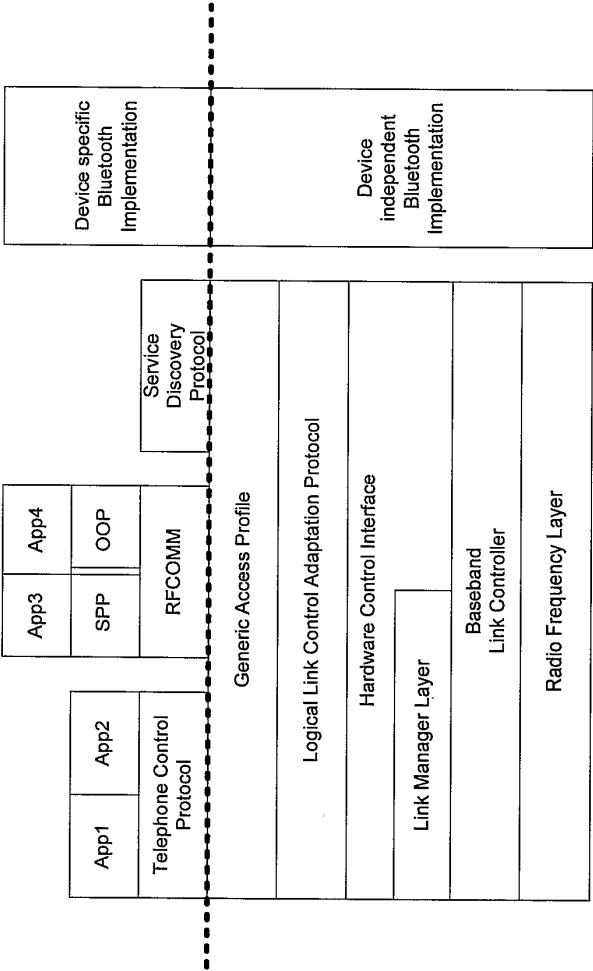


FIGURE 6

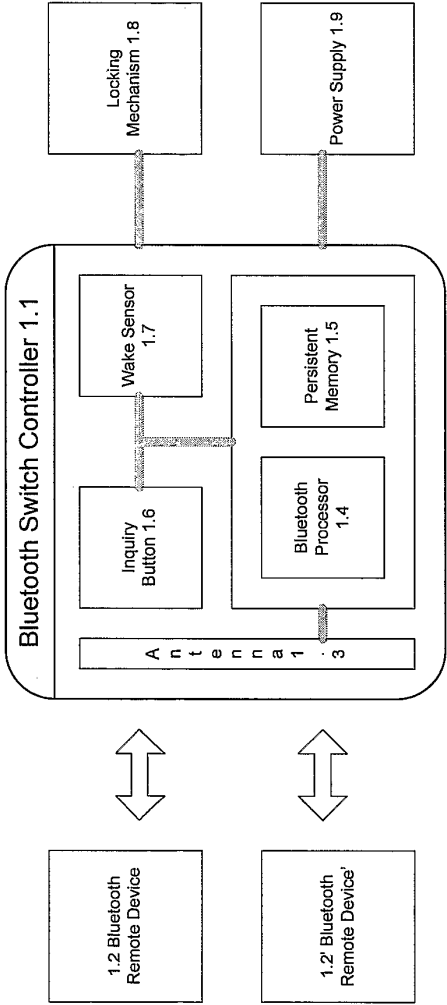


FIGURE 7

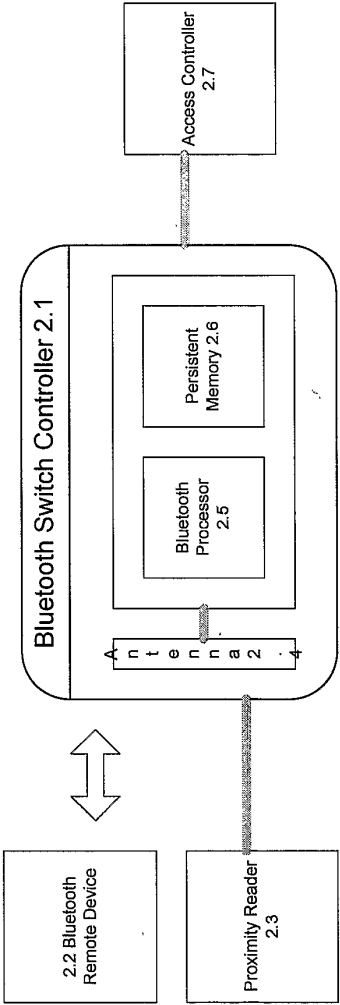


FIGURE 8

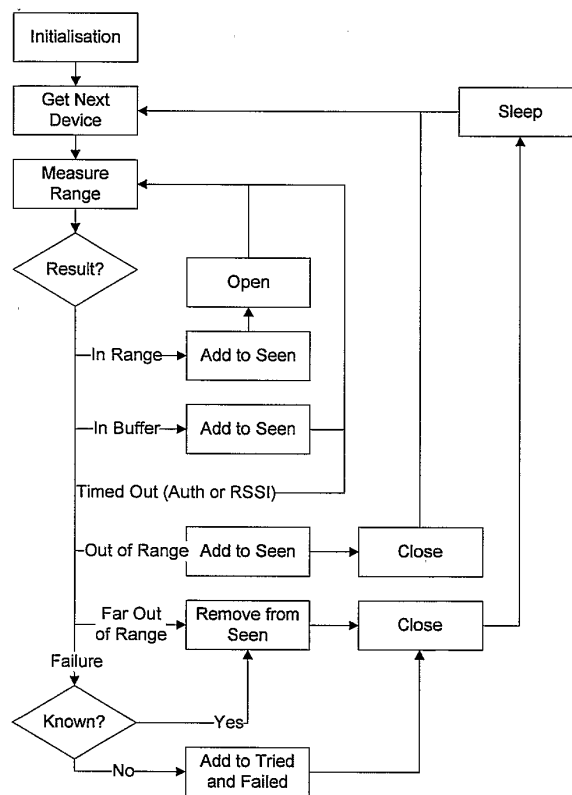


FIGURE 9

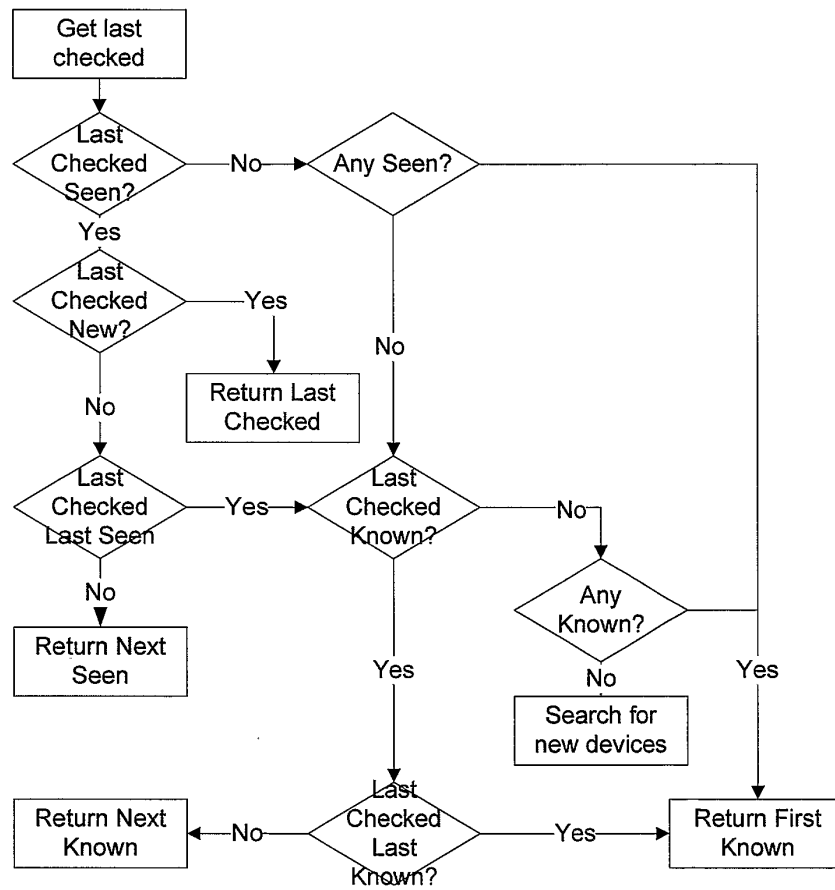


FIGURE 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ2007/000069

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

H04Q 7/20 (2006.01)**G01S 5/02** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT & Espace: rssi, location, measure, analyse and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 612 999 A1 (MICROSOFT CORPORATION) 4 January 2006 Whole document	1,3-12,14-29,31-37,39-44,46-56
A	WO 2001/58098 A2 (QUALCOMM INCORPORATED) 9 August 2001 Whole document	
A	WO 2005/107094 A1 (HONG KONG APPLIED SCIENCE AND TECHNOLOGY RESEARCH INSTITUTE CO., LTD.) Whole document	

☐ Further documents are listed in the continuation of Box C
 ☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 25 July 2007	Date of mailing of the international search report 31 JUL 2007
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929	Authorized officer JAMES WILLIAMS AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No : (02) 6283 2599

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2007/000069

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
EP	1612999	CN	1715951	JP	2006010687	KR	2006004780
		US	2006046709				
WO	0158098	AU	34912/01	BR	PI0108120	CA	2399730
		CN	1451216	EP	1256211		
WO	2005107094	CN	1951027	US	2005246334		
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.							
END OF ANNEX							