



TECHNICAL FEATURE

UNDERSTANDING OFFSET 8-PSK MODULATION FOR GSM EDGE

The evolution of the GSM standard for mobile communications toward higher data rates embodied by the enhanced data rates for GSM evolution (EDGE) uses a variation of an eight-phase-shift keying (8-PSK) modulation scheme. Understanding of the selected modulation technique and the reasons behind it is important because they drive design choices. This article describes 8-PSK and its derivation toward the form it takes in GSM EDGE. A complete GSM EDGE transmitter/receiver baseband architecture is discussed along with simulation results.

The need to expand mobile communications systems capabilities to encompass data as well as voice means that higher data rates will be transmitted without loosening bandwidth restrictions. This enhancement requires the use of spectrally more efficient modulation techniques, that is, modulation techniques that offer a higher throughput/occupied bandwidth ratio. An evolution of the current GSM standard to provide higher data rates is GSM EDGE (812.5 kbps) where the modulation scheme to be used is pulse-shaped (Gaussian) $3\pi/8$ offset 8-PSK as opposed to GSM (270.8 kbps), which uses Gaussian minimum-shift keying (GMSK). One of the most remarkable differences between the two modulation formats is that GMSK has a constant amplitude or envelope and exhibits phase modulation; pulse-shaped 8-PSK exhibits both amplitude and phase variations.

8-PSK

Analog or digital modulation consists of varying the characteristics of a sinusoidal waveform $u(t)$ (the carrier), be it amplitude, phase, frequency, polarization or a combination of these characteristics, according to the information being transmitted. In the case of

digital modulation schemes, the information is in a digital format, usually a binary word (n bits), hence producing $M = 2^n$ possible words. Each symbol has a duration T and each bit has a duration T_b , where $T = nT_b$.

M-PSK is a digital modulation scheme where the information to be transmitted is conveyed onto the phase of the carrier. The expression for the modulated carrier $u(t)$ is

$$u(t) = A(t) \cos(2\pi f(t)t + \phi(t)) \quad (1)$$

and the phase of the carrier $\phi(t)$ is

$$\phi(t) = \sum_k \phi_k \delta(t - kT) \quad (2)$$

where

$$\phi_k = \theta_0 + (2m + 1) \frac{\pi}{m}$$

$$m \in [0 \rightarrow M - 1]$$

[Continued on page 80]

ASHKAN MASHHOUR
Nokia Telecommunications
Camberley, Surrey, UK

func
speci
xDSL
nolog
techn

TECHNICAL FEATURE

ϕ_k is a set of M-ary words and $\delta(t)$ is a Dirac pulse. Therefore, the expression for the modulated carrier can be written as

$$\begin{aligned} u(t) &= A(t) \cos \left(2\pi f_c t + \sum_k \phi_k \delta(t - kT) \right) \\ &= \sum_k A(t) \cos(2\pi f_c t + \phi_k) \delta(t - kT) \\ &= \sum_k A \cos(2\pi f_c t + \phi_k) \delta(t - kT) \end{aligned} \quad (3)$$

Since amplitude and phase are constant in M-PSK, this expression can be expanded as

$$\begin{aligned} u(t) &= A \sum_k \left[\cos(\phi_k) \cos(2\pi f_c t) - \sin(\phi_k) \sin(2\pi f_c t) \right] \\ &\quad \cdot \delta(t - kT) \\ &= \sum_k \left[I_k \cos(2\pi f_c t) - Q_k \sin(2\pi f_c t) \right] \delta(t - kT) \end{aligned} \quad (4)$$

where

$$I_k = A \cos(\phi_k)$$


$$Q_k = A \sin(\phi_k)$$

$$f_c = \text{carrier frequency}$$

Traditionally, I_k and Q_k are referred to as the in-phase and quadrature components since $u(t)$ can be decomposed as a sum of two quadrature waveforms $\cos(2\pi f_c t)$ and

$\sin(2\pi f_c t)$. These components take their values in an M-ary alphabet formed by n bits ($M = 2^n$). This expression can be represented in the Fresnel plane (complex plane referring to a complex envelope representation of the signal).

For 8-PSK, $M = 8 = 2^3$ where $n = 3$. Therefore, each symbol is formed from three bits. A vectorial illustration of this technique is shown in **Figure 1**, with $\theta_0 = 0$ and a Gray coding for mapping the bits to the symbols.

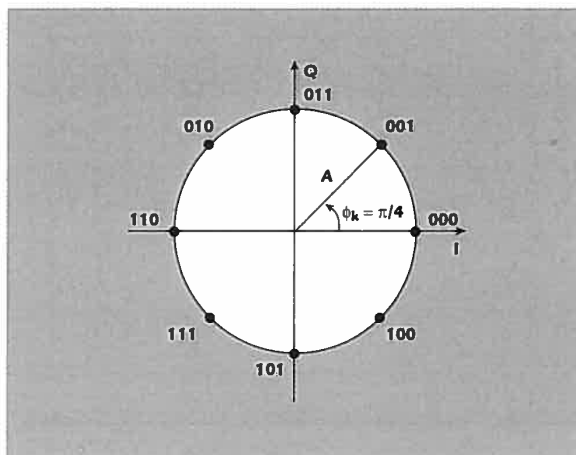

▲ Fig. 1 An 8-PSK constellation diagram with Gray coding.

[Continued on page 83]

CONTROL PRODUCTS DC to 50 GHz



VOLTAGE VARIABLE ATTENUATORS

FREQUENCY (GHz)	TYPE	DIE SIZE (mm)	IL (dB)	ISOLATION (Max. Attenuation dB)	P _{avg} (dBm)	PART NUMBER
18-50	VVA	1.40 X 2.00	2.5	40	-4	AV850M1-00
18-50	VVA	1.05 X 1.50	2.5	35	10	AV850M2-00

PIN SWITCHES

FREQUENCY (GHz)	TYPE	DIE SIZE (mm)	IL (dB)	ISOLATION (Max. Attenuation dB)	P _{avg} (dBm)	PART NUMBER
18-40	SPST	1.23 X 0.67	1.0	42	33	AP640R1-00
24-40	SPDT	1.10 X 2.19	0.8	36	33	AP640R5-00

MMIC SWITCHES

Non-Reflective Switches

FREQUENCY (GHz)	DESCRIPTION	INSERTION LOSS (dB)	ISOLATION (dB)	1 dB COMP. (dBm Typ.)	PACKAGE	PART NUMBER
DC-6.0	SPST High Isolation	1.0-2.5	62-48	24	8 Leaded "Chip on Board"	AS006M1-93
DC-6.0	SPDT High Isolation	0.8-2.0	58-35	24	8 Leaded "Chip on Board"	AS006M2-93



CALL OR SURF TODAY


◆ 508-894-1904 ◆ www.alphaind.com

20 Sylvan Road • Woburn, MA 01801 USA

Alpha


from concept to solution... your wireless source

TECHNICAL FEATURE

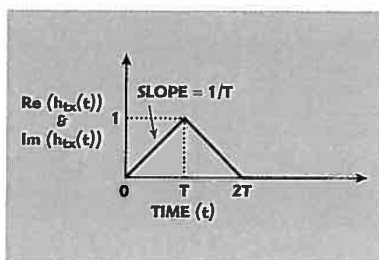


▲ Fig. 2 The triangular filter's impulse response.

Fig. 3 The triangular filter's frequency response. ▼

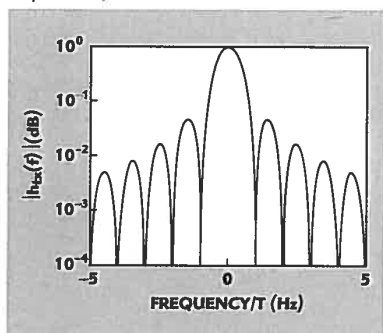

▼ Fig. 4 An 8-PSK constellation diagram.

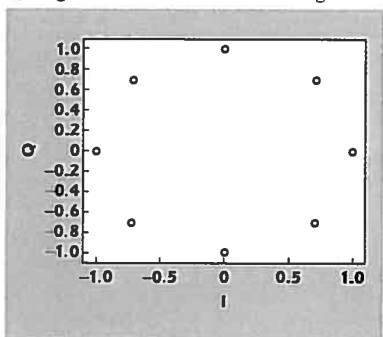

PULSE SHAPING


Considering the complex envelope of the signal $u_e(t)$ given by

$$u_e(t) = \sum_k \exp(j\phi_k) \delta(t - kT) \quad (5)$$

the spectrum of this signal is represented as


$$FT(u_e(t)) = U_e(f) = \sum_k \exp(j(\phi_k + 2\pi f k)) \quad (6)$$

Since ϕ_k has a random distribution, $U_e(f)$ also has a random distribution and can be regarded as having an infinite bandwidth. In practice, it is not tolerable to transmit such a signal since only a limited bandwidth is available. Therefore, the signal needs

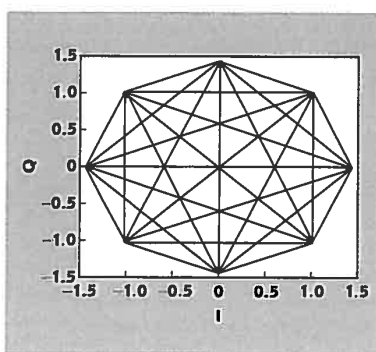

▲ Fig. 5 Trajectories for the triangular filter.

Fig. 6 The GSM EDGE pulse-shaping filter's impulse response. ▼

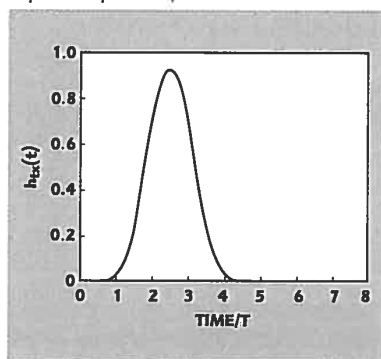

to be filtered in order to limit its spectrum. A useful filter is a triangular filter for which the time and frequency domain responses are shown in **Figures 2** and **3**, respectively. (This filter can be derived easily.)

It is often mistakenly thought that 8-PSK signals' trajectories are linear transitions between one constellation point and the next. In fact, an 8-PSK signal as represented by its I and Q components has no trajectory as such because instantaneous phase changes occur between symbols at every T. **Figure 4** shows an 8-PSK constellation diagram. This filter produces linear monotonic trajectories, as shown in **Figure 5**, from one symbol to the following symbol and it can be seen from its impulse response that the output depends on two consecutive symbols. (T is the period of a symbol.) The frequency response of the filter displays a reduced spectrum (-3 dB BW $\approx 0.32/T$ Hz).

The proposed filter for GSM EDGE is a Gaussian-like filter for which the impulse and frequency response are shown in **Figures 6** and

[Continued on page 84]

Berkeley's Newest, Advanced Lab Testing Equipment



Zebra II™ IS-95 16-CHANNEL CDMA SOURCE

APPLICATIONS:

- Testing of power amps for multiple CDMA carrier signals
- Development of 3G W-CDMA products
- ACPR measurements
- Realistic characterization of power amplifiers as per IS-97 specifications

FEATURES:

- Selectable wave forms - up to 8
- Selectable data - All O's, I's, PRBS, custom
- Selectable multicarriers - up to 7
- 16 code channels with selectable Walsh & amplitude
- PC independent waveform generation
- Auto clock selection



4 other optional TTL outputs available (GSM, W-CDMA, 2.048 MHz, 10 MHz)

Rhino II™ RUBIDIUM-LOCKED FREQUENCY SOURCE

The Rhino II is designed for both laboratory and field use where GPS reception may be unavailable, such as indoors or in large cities.

The Rhino II outputs the following buffered (50Ω) reference signals:

- 10 MHz (8 individually buffered outputs)
- 19.6608 MHz (IS-95 clock multiple)
- 13 MHz (GSM), 3.68 MHz (W-CDMA)
- 1 PPS, 1/2 PPS (odd/even second)
- Adj. PPS (phase adjustable - to CDMA base station offsets 0-511)


BERKELEY VARITRONICS SYSTEMS

Call us today for more information:
732-548-3737 / Fax: (732) 548-3404
Internet: www.bvsystems.com
E-mail: info@bvsystems.com

CIRCLE 194


83

TECHNICAL FEATURE

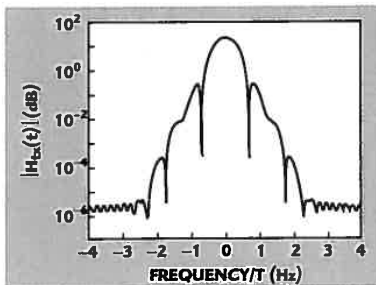


▲ Fig. 7 The GSM EDGE pulse-shaping filter's frequency response.

Fig. 8 The filtered GSM EDGE 8-PSK constellation. ▼

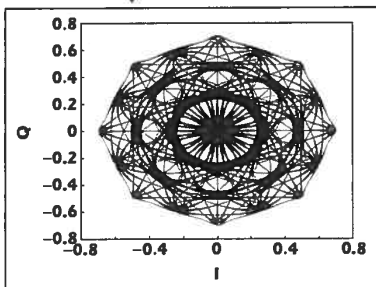

7, respectively. (The impulse response of the filter as it is defined in the European Telecommunications Standards

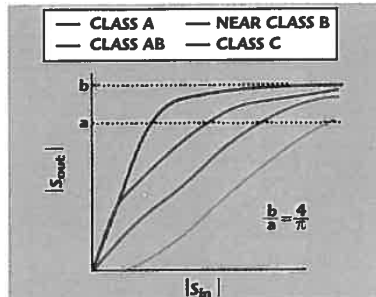


▲ Fig. 9 Typical PA characteristics.

Institute (ETSI) standards is discussed in **Appendix A.** It can be seen that the output of this filter is dependent on five consecutive symbols. The trajectory of the filtered I and Q signals is shown in **Figure 8**. It is worth noting that the unfiltered I and Q signals are of a constant amplitude although the filtered signal undergoes both phase and amplitude variations.

OFFSET PULSE-SHAPED 8-PSK

In both of the examples discussed earlier, the trajectory of the modulating data (I and Q) goes through the origin (I = Q = 0). In practice, power ampli-

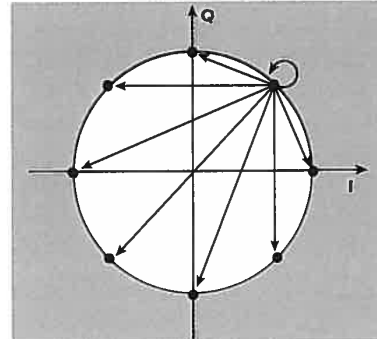

▲ Fig. 10 All possible 8-PSK transitions.

fiers exhibit a nonlinear characteristic not only for high power regions but also for low power regions, as shown in **Figure 9**. This condition is especially true for class C amplifiers where the base-emitter junction threshold is required to start conducting before the amplifier kicks in. In other words, for modulation schemes such as 8-PSK, where the trajectory crosses the origin, nonlinearity at low power regions will distort the signal and, hence, produce spectral regrowth. **Figure 10** shows all

[Continued on page 87]

How Well Protected Are You?


When T/R tubes degrade in your receiver protector applications, the consequences can be costly. Herley-MDI's Solid State Receiver Protectors are a direct replacement for traditional T/R tubes and deliver MTBF figures magnitudes higher. Our superior design is also capable of handling up to 10 KW of power. Plus, you can choose from any combination of passive limiting protection, sensitivity time control attenuation, gated transmitter pulse attenuation, built in test signals and detector monitoring. Additional features include exceptionally low insertion loss and typical VSWR of less than 1.5:1.

We're currently upgrading F-16 Fire Control, commercial weather, and shipboard radars. To give your current system maximum protection, call us or visit our web site today.

HERLEY-MDI
A HERLEY INDUSTRIES COMPANY

10 Sonar Drive Woburn, MA 01801
Tel: (781) 729-9450 • Fax: (781) 729-9547

HERLEY Microwave Products Group



www.herleympg.com

um
etts
iety
2000

000.

order to
required
s process
res, send

IMS2000
orkshops
kshop or

se
rd.
ed.

Copy


1999

1999

2000


held dur-
rday, re-
FIC and

TECHNICAL FEATURE

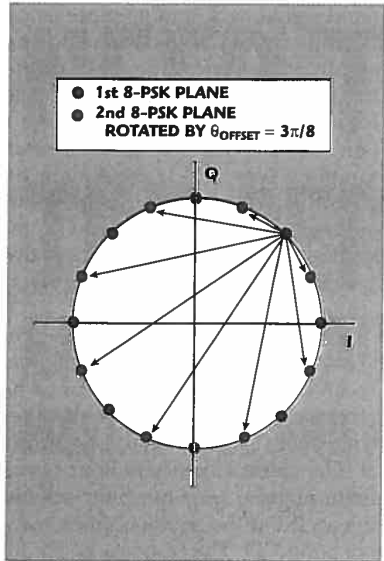

▲ Fig. 11 Offset 8-PSK transitions.

Fig. 12 The pulse-shaped (triangular) 3π/8 offset 8-PSK constellation. ▼

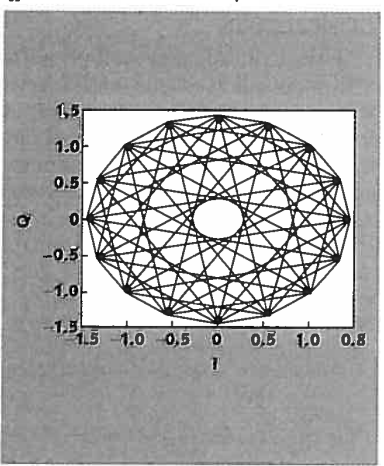


of the possible transitions from one symbol to the next.

It would be useful if the origin somehow could be avoided for the modulating data. One way of doing this is to offset the modulation scheme. In 8-PSK, the symbol at present time kT is $e(kT) = \exp(j\phi_k)$ and at time $(k+1)T$ is $e((k+1)T) = \exp(j\phi_{k+1})$, with $\phi_{k+1} \equiv \phi_k \text{ mod } [\pi/4]$.

Continuously rotating the symbols by an offset $\theta_{\text{offset}} \equiv \pi/8 \text{ mod } [\pi/4]$ prevents the signal from crossing through the origin. Hence, the transmitted signal becomes

$$u_{e\_offset}(t) = \sum_k \exp(j(\phi_k + k\theta_{\text{offset}}))\delta(t - kT) \quad (7)$$

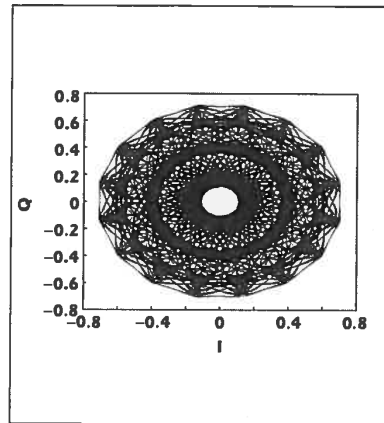

▲ Fig. 13 The pulse-shaped (GSM EDGE) 3π/8 offset 8-PSK constellation.

This condition is viewed as having two 8-PSK constellation planes offset by θ_{offset} and swapping from one plane to the other at every consecutive symbol time as shown in **Figure 11**, where $\theta_{\text{offset}} = 3\pi/8$. This procedure can be illustrated using the triangular filter mentioned earlier and filtering the I and Q signals, where the benefit of rotating two 8-PSK planes leads to avoiding the center region of the constellation, as shown in **Figure 12**. Applying the offset to the 8-PSK constellation and filtering it with the GSM EDGE pulse-shaping filter produces the output constellation shown in **Figure 13**. Again, it can be seen that the trajectories no longer cross the origin.

One disadvantage of this procedure is that it may put strain on the detection for which the threshold margins are reduced. However, since there is a change in planes from one symbol to the next, the decision-making process in the receiver approximates that of an 8-PSK signal rather than, for example, a 16-PSK signal.

RECEIVER FILTER

In general, the baseband signal described previously is subsequently upconverted, transmitted via the transmission channel and demodulated in the receiver where a baseband signal is recovered. However, this example assumes that there is no up- or downconversion and that the transmission channel is ideal. In other words, to keep things simple, the analysis is performed at baseband according to the block diagram shown

[Continued on page 88]

GET ON BOARD

AVAILABLE ON TAPE & REEL

WITH OUR HIGH FREQUENCY SURFACE MOUNT DIODES

MicroMetrics HFSM series diodes are ready to be designed into all your PIN, Varactor, and Limiter Diode applications up to 4 GHz. The encapsulated "chip-on-board" design features low parasitics, extremely high repeatability, and standard footprints. They're available for fast delivery — so get on board today.

Visit www.micrometrics.com to request more information and samples.



MicroMetrics
MicroMetrics, Inc.
136 Harvey Road, Building C
London, NH 03053
603-641-3800 • Fax: 603-641-3500
www.micrometrics.com
888-641-SEMI
7 3 6 4

TECHNICAL FEATURE

in **Figure 14**. (T = symbol period, T_s = sampling period (oversampling $\Rightarrow T_s \leq T$) and T_{rx} = sampling period going through the receiving filter. It is envisageable to have $T_s = T_{rx} = T_b$ (T_b = bit period) with appropriate zero padding.)

Although working at baseband, the transmitted signal, once it has been filtered (pulse-shaping filter $h_{tx}(t)$), is difficult to interpret. (Error vector magnitude can be used to assess the received signal.) Hence, it is desirable to convert the transmitted fil-

tered signal back into a constellation as done initially, and then do the comparison. As can be seen in the transmitted signal, the main obstacle is that the signal at a given time t (and, more specifically, at the symbol sampling time kT) is dependent on several samples, or symbols (depending on the undersampling rate — recall the Gaussian filter spans over five symbol periods), referred to as intersymbol interference (ISI).

The aim here is to determine a receiver filter $h_{rx}(t)$ that will enable the received constellation diagram to be recovered. The derivation of the filter coefficients is explained in **Appendix B**. The chosen filter here is an 11-tap finite impulse response filter exhibiting no ISI at the decision times (symbol period T). The response of the filter and the recovered constellation diagram are shown in **Figures 15** and **16**, respectively.

CONCLUSION

This article has described an 8-PSK modulation scheme and some of its variations as well as its application to the GSM EDGE standard. It also explained a means of determining a complete baseband transmitter and receiver architecture. Additional information can be obtained from the author. ■

References


1. "Change Request A001, Rev. 1. Technical Specification GSM/UMTS: 05.04, Version 5.01 — SMG2 453/98," ETSI, November 1998.
2. John G. Proakis, *Digital Communications*, Third Edition, McGraw-Hill, New York, 1995.
3. B.P. Lathi, *Modern Digital and Analog Communication Systems*, Holt-Saunders International, New York, 1983.




Ashkan Mashhour received his Diplôme d'Ingénieur from ENST Bretagne, France, and his MSc from University College London, UK, both in 1997. He then joined Nokia Telecommunications, Camberley, UK, where he currently works as an RF design engineer. He

is involved in the development of new RF technologies and transceiver architectures for future-generation base stations. Mashhour can be reached at +44 (0) 1276 602 024 or Ashkan.Mashhour@ntc.nokia.com.


[Continued on page 90]

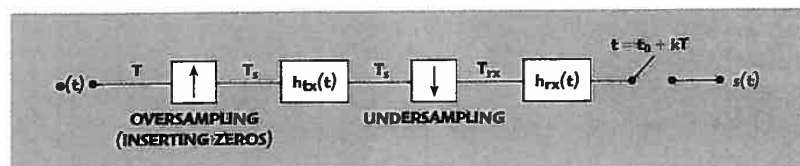

▲ Fig. 14 The transmit/receive chain.

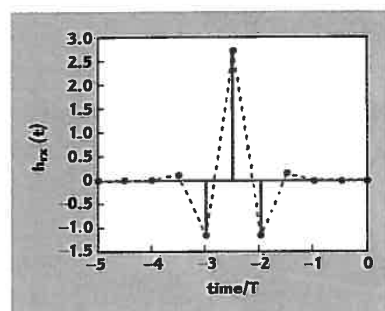

▲ Fig. 15 The zero-forcing GSM EDGE filter's impulse response.

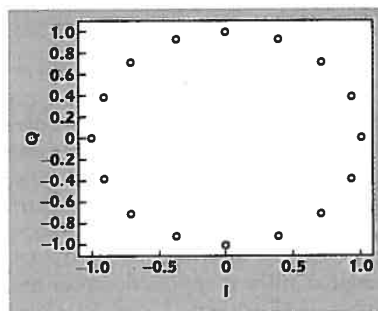

▲ Fig. 16 The received constellation with no ISI.

DETECTORS & LIMITERS 10MHz to 26.5GHz

Package Styles:
Hermetic Coaxial Tubular
Hermetic Coaxial Rectangular
Hermetic Pin (Module) Packages
Waveguide



Custom Products:
Power Monitors
Detector Video Amplifiers
Threshold Detectors
T/R Limiters

MICA
MICROWAVE
<http://www.mica-mw.com>

2017 Realm Drive
San Jose, CA 95119
Tel: 408-363-9200
Fax: 408-363-9220

Ansoft's Hi
prototypes,
macros to

TECHNICAL FEATURE

APPENDIX A

GSM EDGE pulse shaping filter impulse response h_{tx}

$$h_{tx}(t) = \begin{cases} \prod_{i=0}^3 S(t+iT) & \text{for } 0 \leq t \leq 5T \\ 0 & \text{elsewhere} \end{cases}$$

where

$$S(t) = \begin{cases} \sin\left(\pi \int_0^t g(x) dx\right) & \text{for } 0 \leq t \leq 4T \\ \sin\left(\frac{\pi}{2} - \pi \int_0^{t-4T} g(x) dx\right) & \text{for } 4T \leq t \leq 8T \\ 0 & \text{elsewhere} \end{cases}$$

$$g(t) = \frac{1}{2T} \left[Q\left(2\pi \cdot 0.3 \frac{t-5T}{T\sqrt{\log_e(2)}}\right) - Q\left(2\pi \cdot 0.3 \frac{t-3T}{T\sqrt{\log_e(2)}}\right) \right]$$

and

$$Q(t) = \frac{1}{\sqrt{2\pi}} \int_t^{+\infty} \exp\left(-\frac{x^2}{2}\right) dx = \frac{1}{2} \operatorname{erfc}\left(\frac{t}{\sqrt{2}}\right)$$

for GSM EDGE, $T = 3.69 \mu s$

APPENDIX B

Derivation of the Receiver Filter h_{rx}

The input signal is the complex $3\pi/8$ offset 8-PSK signal $e(t)$

$$e(t) = \sum_k \exp\left[j\left(\phi_k + k\frac{3\pi}{8}\right)\right] \delta(t-kT) \quad (A1)$$

This signal is then filtered by the Gaussian-like pulse shaping filter and filtered again by the receiver filter. The received signal $s(t)$ can be written as

$$\begin{aligned} s(t) &= e(t) \otimes h_{tx}(t) \otimes h_{rx}(t) \\ &= e(t) \otimes g(t) \quad \text{with } g(t) = h_{tx}(t) \otimes h_{rx}(t) \end{aligned} \quad (A2)$$

where $\otimes$ stands for convolution

To recover the transmitted signal (constellation), it is desirable to make $S(kT) = e(kT)$

$$\begin{aligned} s(kT) &= e(kT) \\ s(kT_s) &= \sum_n e(nT_s) g(kT_s - nT_s) \\ \text{at } t &= kT: \\ s(kT) &= \sum_n e(nT_s) g(kT - nT_s) \\ &= e(kT) g(kT - kT) + \sum_{nT_s \neq kT} e(nT_s) g(kT - nT_s) \\ &= e(kT) g(0) + \sum_{n \neq k} e(nT) g(kT - nT) \\ &\quad \text{because } e(nT_s) = 0 \text{ for } nT_s \neq lT \\ &= e(kT) g(0) + \sum_{n, m \neq 0} e(nT) g(mT) \quad \forall e(t) \end{aligned} \quad (A3)$$

Hence, the condition to be satisfied to guarantee no ISI is

$$\forall k \in Z^* \begin{cases} g(0) = 1 \\ g(kT) = 0 \end{cases} \quad (A4)$$

Note that it is not necessary to define the behavior of g at all $t = nT_s$

$$\begin{aligned} \underline{g(0)=1} &\Leftrightarrow g(0) = \sum_n h_{tx}(nT_s) h_{rx}(0 - nT_s) \\ &\Leftrightarrow \sum_n h_{tx}(nT_s) h_{rx}(-nT_s) = 1 \quad \Rightarrow \text{if } h_{tx} \text{ is causal then } h_{rx} \text{ is not causal} \\ \underline{g(kT)=1} &\Leftrightarrow \sum_n h_{tx}(nT_s) h_{rx}(kT - nT_s) = 0 \quad \text{for } k \neq 0 \end{aligned}$$

This system of linear equations leads to a matrix equation. If the receiver filter is defined every T/m step, $h_{rx}(t)$'s impulse response will be defined by a set of $2n+1$ coefficients $b_{-2n}, b_{-2n+1}, \dots, b_0$ and $k \in [-n \rightarrow +n]$. In other words, the value of g is specified at $2n+1$ points. This requires $2n+1$ samples of the transmitter pulse shaping filter $h_{tx}(t)$ ($a_0, a_1, \dots, a_2$) to be taken. Note that the receiver filter $h_{rx}(t)$ is noncausal here, hence the choice of negative indices. This type of filter is sometimes referred to as a zero-forcing filter. The set of equations can be written as

[Continued on page 92]

D
W
PR

Harmonic
Harmonic
analysis,
Filter Sy
easy-to-1

TECHNICAL FEATURE

APPENDIX B (continued)

$$\begin{matrix} k=-n \\ k=-n+1 \\ \vdots \\ k=0 \\ \vdots \\ j \\ \vdots \\ k=+n \end{matrix} \begin{bmatrix} a_0 & 0 & \dots & 0 & 0 & \dots & 0 \\ a_{-m} & a_{-m+1} & \dots & a_0 & 0 & \dots & 0 \\ a_{-2m} & a_{-2m+1} & \dots & a_{-m} & a_{-m+1} & \dots & a_0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ a_{-2n} & a_{-2n+1} & \dots & \dots & \dots & \dots & a_0 \\ 0 & \dots & 0 & a_{-2n} & a_{-2n+1} & \dots & a_{-2n+m} \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \dots & \dots & 0 & a_{-2n} & \dots & a_{-2n+m} \\ & & & & & & a_0 \end{bmatrix} \cdot \begin{bmatrix} b_{-2n} \\ b_{-2n+1} \\ \vdots \\ b_0 \end{bmatrix} = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

$A \qquad h_{rx} \qquad x$

or

$$A \cdot h_{rx} = x \quad (A5)$$

The receiver filter h_{rx} coefficients are determined by multiplying Equation A5 by the inverse matrix A^{-1} , expressed as

$$h_{rx} = A^{-1} \cdot x \quad (A6)$$

This result is applied to the GSM EDGE pulse shaping filter. If the receiver filter is defined every $T/2$ step, $h_{rx}(t)$ will be defined by a set of 11 coefficients ($b_{-10}, b_{-9}, \dots, b_0$) (the receiver filter $h_{rx}(t)$ is noncausal here). Taking 11 samples spaced $T/2$ from the pulse shaping filter $h_{tx}(t)$ ($a_0, a_1, \dots, a_{10}$) leads to

$$\begin{bmatrix} a_0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ a_{-2} & a_{-1} & a_1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ a_{-4} & a_{-3} & a_{-2} & a_{-1} & a_0 & 0 & 0 & 0 & 0 & 0 & 0 \\ a_{-6} & a_{-5} & a_{-4} & a_{-3} & a_{-2} & a_{-1} & a_0 & 0 & 0 & 0 & 0 \\ a_{-8} & a_{-7} & a_{-6} & a_{-5} & a_{-4} & a_{-3} & a_{-2} & a_{-1} & a_0 & 0 & 0 \\ a_{-10} & a_{-9} & a_{-8} & a_{-7} & a_{-6} & a_{-5} & a_{-4} & a_{-3} & a_{-2} & a_{-1} & a_0 \\ 0 & 0 & a_{-10} & a_{-9} & a_{-8} & a_{-7} & a_{-6} & a_{-5} & a_{-4} & a_{-3} & a_{-2} \\ 0 & 0 & 0 & 0 & a_{-10} & a_{-9} & a_{-8} & a_{-7} & a_{-6} & a_{-5} & a_{-4} \\ 0 & 0 & 0 & 0 & 0 & 0 & a_{-10} & a_{-9} & a_{-8} & a_{-7} & a_{-6} \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & a_{-10} & a_{-9} & a_{-8} \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & a_0 \end{bmatrix} \cdot \begin{bmatrix} b_{-10} \\ b_{-9} \\ b_{-8} \\ b_{-7} \\ b_{-6} \\ b_{-5} \\ b_{-4} \\ b_{-3} \\ b_{-2} \\ b_{-1} \\ b_0 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} \quad (A7)$$

The filter determined in this manner has the impulse response shown previously. In this case, $a_0 = a_{-10} = 0$, hence, matrix A^{-1} is not defined. The inverse of a submatrix B of A where $B = A_{ij}$ with $(i,j) \in [1 \rightarrow 9]$ (that is, B is A with the first and last columns and rows removed) is required. Therefore, b_0, b_{-10} can be set to 0. The matrix A in Equation A7 becomes

$$A = \begin{bmatrix} -0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 \\ 0.031 & 0.001 & -0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 \\ 0.706 & 0.260 & 0.031 & 0.001 & -0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 \\ 0.706 & 0.927 & 0.706 & 0.260 & 0.0031 & 0.001 & -0.000 & 0.000 & 0.000 & 0.000 & 0.000 \\ 0.032 & 0.261 & 0.706 & 0.927 & 0.706 & 0.260 & 0.031 & 0.001 & -0.000 & 0.000 & 0.000 \\ 0.000 & 0.001 & 0.032 & 0.261 & 0.706 & 0.927 & 0.706 & 0.260 & 0.031 & 0.001 & -0.000 \\ 0.000 & 0.000 & 0.000 & 0.000 & 0.001 & 0.032 & 0.261 & 0.706 & 0.927 & 0.706 & 0.260 \\ 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.001 & 0.032 & 0.261 & 0.706 & 0.927 \\ 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.001 & 0.032 & 0.261 & 0.706 \\ 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.001 & 0.032 & 0.261 \\ 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.000 & 0.001 & 0.032 \end{bmatrix}$$

$$B^{-1} = \begin{bmatrix} 1392 & 0 & 0 & -0 & 0 & -0 & 0 & -0 & 0 \\ -12288 & 34 & -0 & 0 & -0 & 0 & -0 & 0 & -34 \\ 33598 & -111 & 5 & -0 & 0 & -0 & 0 & -6 & 1507 \\ -44240 & 154 & -10 & 3 & -1 & 1 & -3 & 46 & -12473 \\ 33716 & -119 & 8 & -3 & 3 & -3 & 8 & -124 & 33796 \\ -12448 & 44 & -3 & 1 & -1 & 3 & -10 & 160 & -44348 \\ 1507 & -5 & 0 & -0 & 0 & -0 & 5 & -116 & 33682 \\ -36 & 0 & -0 & 0 & -0 & 0 & -0 & 36 & -12319 \\ 0 & -0 & 0 & -0 & 0 & -0 & 0 & -0 & 1395 \end{bmatrix}$$

$$h_{rx} = b = \begin{bmatrix} 0 \\ 0 \\ -0.0032 \\ 0.1382 \\ -1.1359 \\ 2.7318 \\ -1.1366 \\ 0.1387 \\ -0.0033 \\ 0 \\ 0 \end{bmatrix} \quad h_{tx} = a = \begin{bmatrix} -0 \\ 0.0007 \\ 0.0315 \\ 0.2604 \\ 0.7057 \\ 0.9268 \\ 0.7057 \\ 0.2605 \\ 0.0315 \\ 0.0008 \\ 0 \end{bmatrix}$$

The recovered signal exactly matches the transmitted $3\pi/8$ offset 8-PSK constellation since the channel is ideal.

S
W
RES

Give you
Ensemble
can place
to include