



US006982905B2

(12) **United States Patent**
Nguyen

(10) **Patent No.:** **US 6,982,905 B2**
(45) **Date of Patent:** **Jan. 3, 2006**

(54) **METHOD AND APPARATUS FOR READING
NAND FLASH MEMORY ARRAY**

(56) **References Cited**

(75) Inventor: **Dzung H. Nguyen**, Fremont, CA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Micron Technology, Inc.**, Boise, ID
(US)

6,614,683 B1 9/2003 Parker
6,643,177 B1 11/2003 Le
6,665,213 B1 12/2003 Michael
6,819,592 B2 * 11/2004 Noguchi et al. 365/185.17

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 145 days.

* cited by examiner

Primary Examiner—Huan Hoang

(74) *Attorney, Agent, or Firm*—Leffert Jay & Polglaze, P.A.

(21) Appl. No.: **10/682,585**

(22) Filed: **Oct. 9, 2003**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2005/0078518 A1 Apr. 14, 2005

(51) **Int. Cl.**
GI1C 16/04 (2006.01)

(52) **U.S. Cl.** **365/185.17**; 365/185.18;
365/185.22

(58) **Field of Classification Search** 365/185.17,
365/185.18, 185.22

See application file for complete search history.

The method for reading/verifying a NAND flash memory device alternates the select gate biasing in response to the position of the cell to be read. If the cell is closer to the top of the column, the SG(D) line is biased prior to the SG(S) line. If the cell is closer to the bottom of the column, the SG(S) line is biased prior to the SG(D) line.

20 Claims, 6 Drawing Sheets

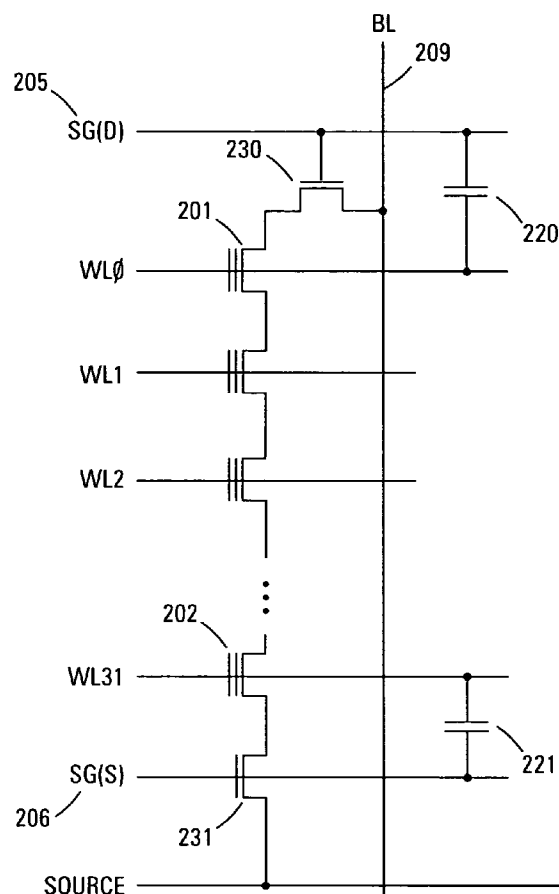
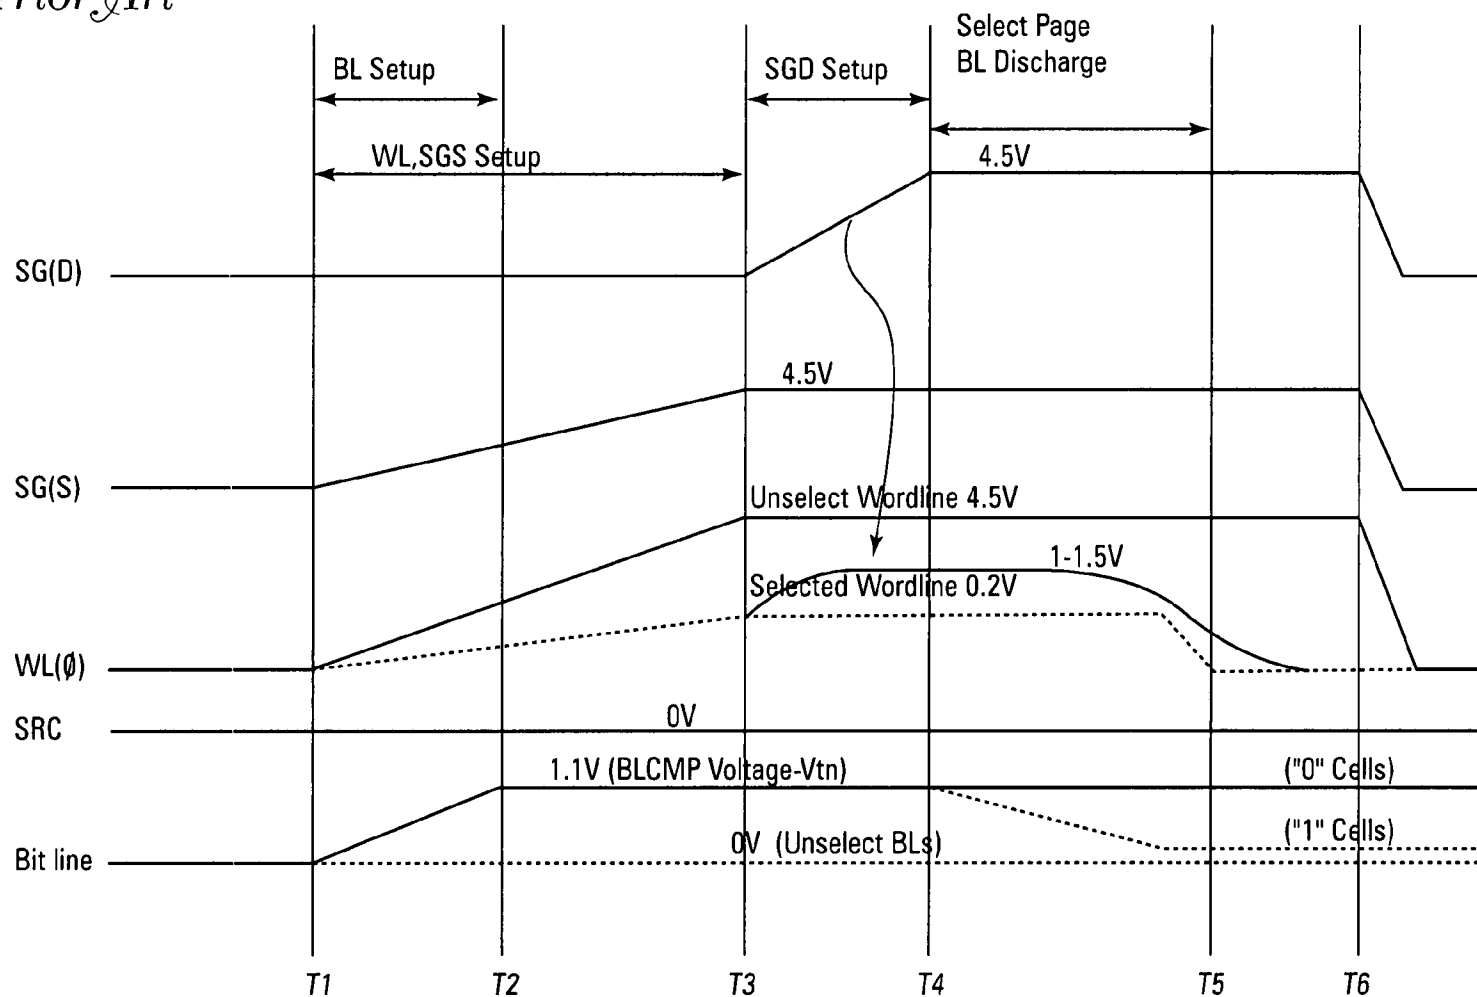


Fig. 1
Prior Art



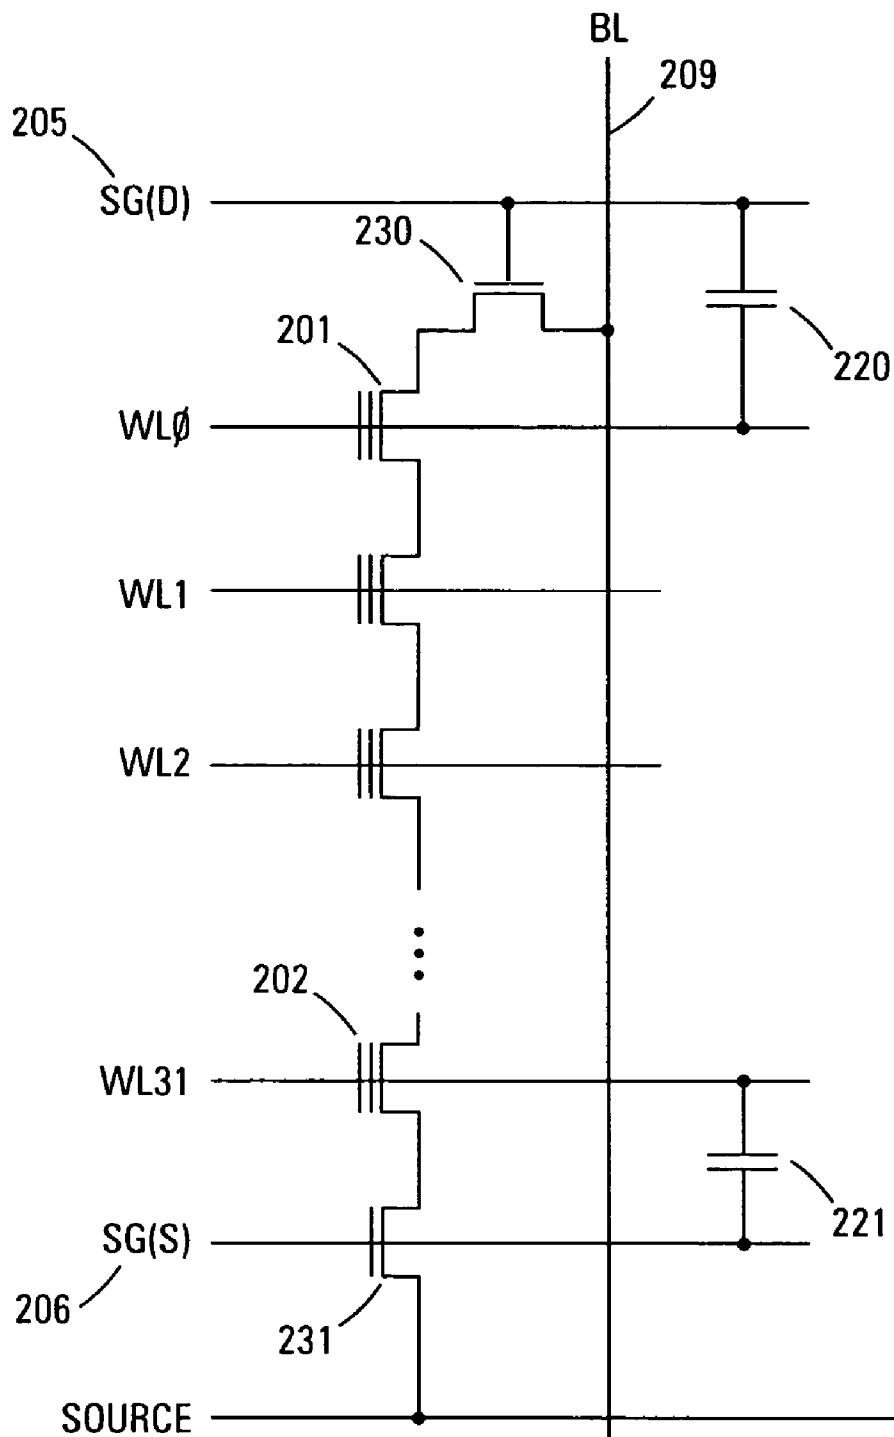


Fig. 2

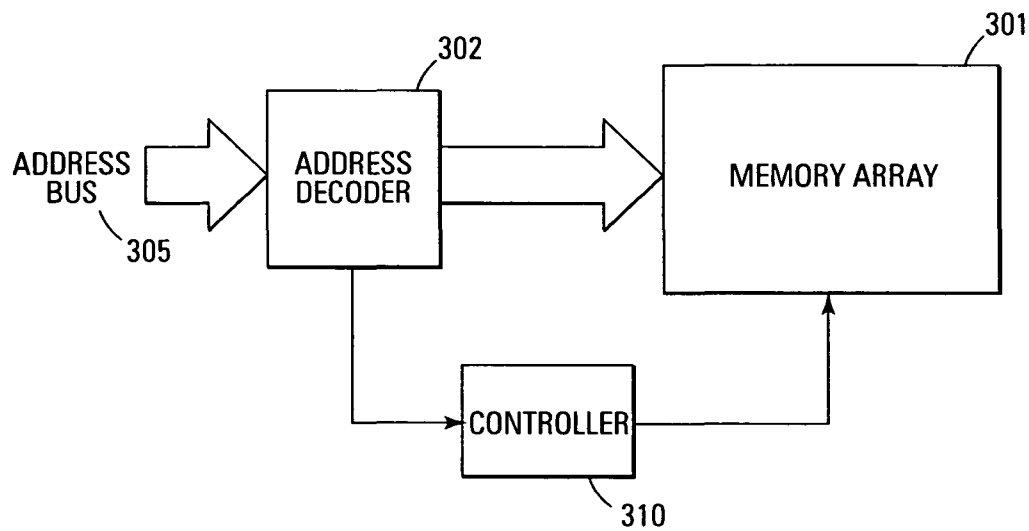
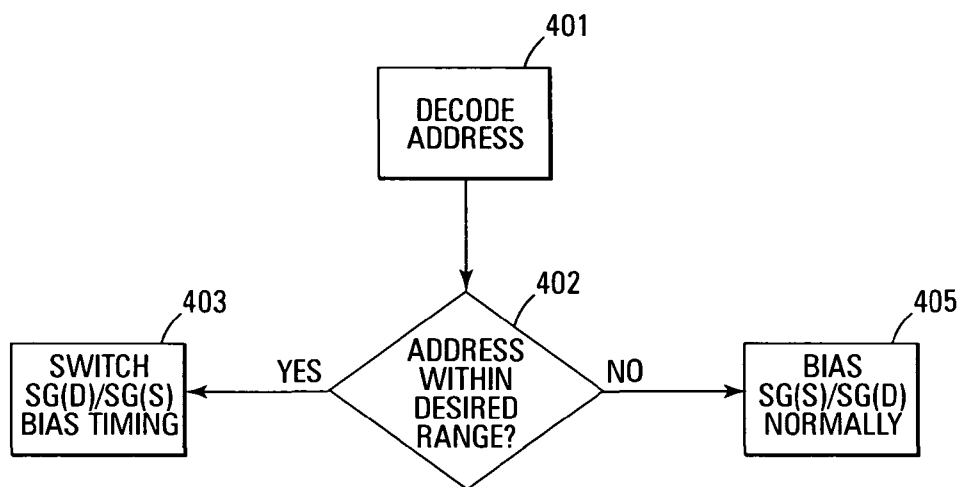
*Fig. 3**Fig. 4*

Fig. 5

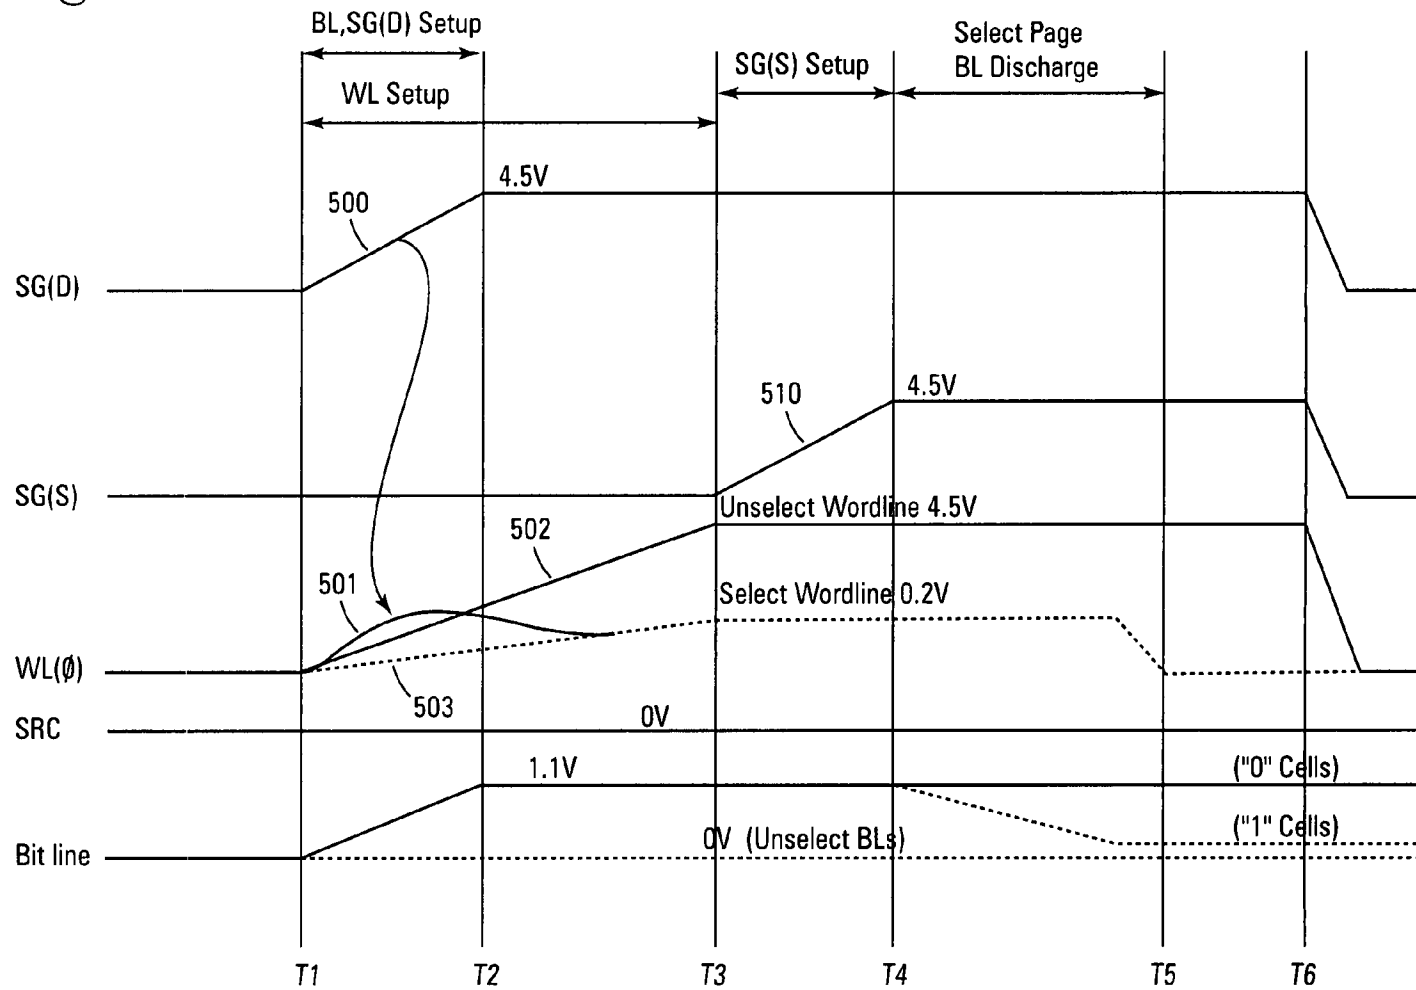
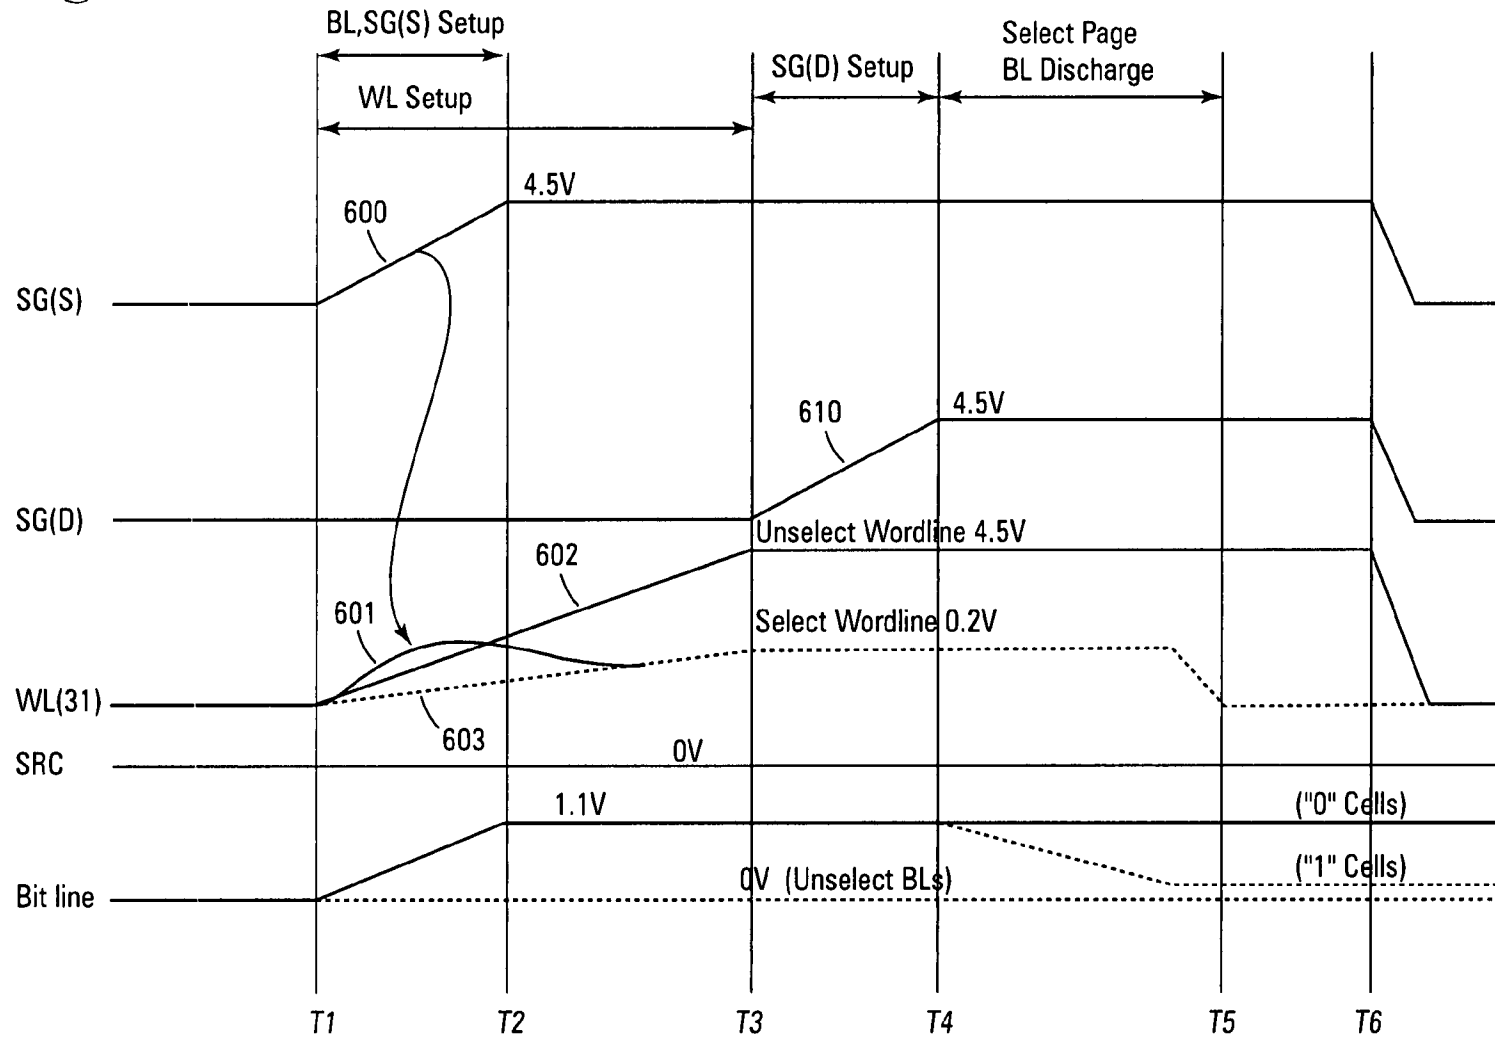
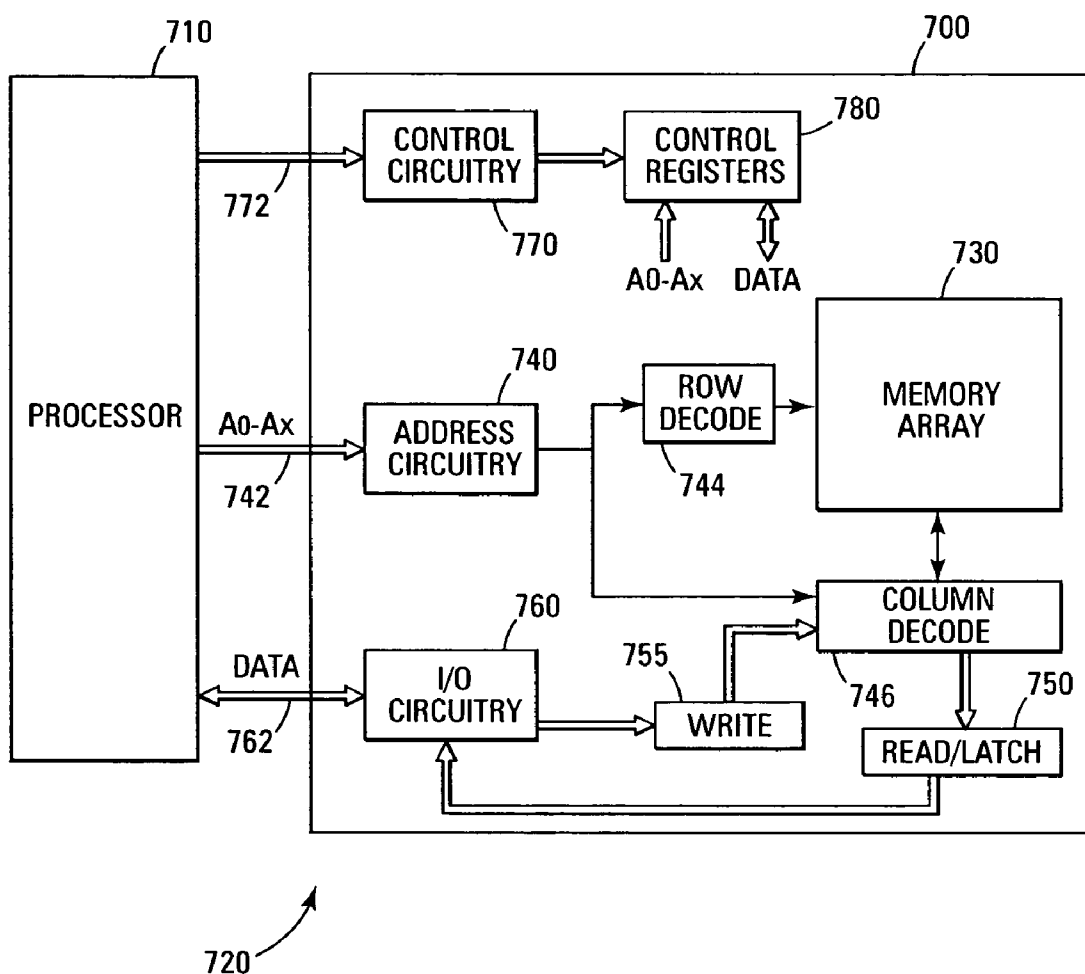


Fig. 6



*Fig. 7*

1

METHOD AND APPARATUS FOR READING NAND FLASH MEMORY ARRAY

TECHNICAL FIELD OF THE INVENTION

The present invention relates generally to memory devices and in particular the present invention relates to NAND flash memory devices.

BACKGROUND OF THE INVENTION

Memory devices are typically provided as internal, semiconductor, integrated circuits in computers or other electronic devices. There are many different types of memory including random-access memory (RAM), read only memory (ROM), dynamic random access memory (DRAM), synchronous dynamic random access memory (SDRAM), and flash memory.

Flash memory devices have developed into a popular source of non-volatile memory for a wide range of electronic applications. Flash memory devices typically use a one-transistor memory cell that allows for high memory densities, high reliability, and low power consumption. Common uses for flash memory include personal computers, personal digital assistants (PDAs), digital cameras, and cellular telephones. Program code and system data such as a basic input/output system (BIOS) are typically stored in flash memory devices for use in personal computer systems.

Two common types of flash memory array architectures are the "NAND" and "NOR" architectures, so called for the logical form in which the basic memory cell configuration or each is arranged. In the NOR array architecture, the floating gate memory cells of the memory array are arranged in a matrix. The gates of each floating gate memory cell of the array matrix are coupled by rows to word select lines and their drains are coupled to column bit lines. The NOR architecture floating gate memory array is accessed by a row decoder activating a row of floating gate memory cells by selecting the word select line coupled to their gates. The row of selected memory cells then place their data values on the column bit lines by flowing different currents depending on if a particular cell is in a programmed state or an erased state.

A NAND array architecture also arranges its array of floating gate memory cells in a matrix such that the gates of each floating gate memory cell of the array are coupled by rows to word select lines. However each memory cell is not directly coupled to a column bit line by its drain. Instead, the memory cells of the array are coupled together in series, source to drain, between a source line and a column bit line.

The NAND architecture floating gate memory array is accessed by a row decoder activating a row of floating gate memory cells by selecting the word select line coupled to their gates. A high bias voltage is applied to a select gate drain line SG(D). In addition, the word lines coupled to the gates of the unselected memory cells of each group are driven to operate the unselected memory cells of each group as pass transistors so that they pass current in a manner that is unrestricted by their stored data values. Current then flows from the source line to the column bit line through each series coupled group, restricted only by the selected memory cells of each group. This places the current encoded data values of the row of selected memory cells on the column bit lines.

FIG. 1 illustrates voltages at various times during typical prior art NAND verify and read operations. Between times T1 and T3, the select gate source SG(S) line is biased with 4.5V. Also during this time, the unselected wordlines are

2

biased with the same voltage. In this example, only WL0 is shown. The selected wordlines are typically between 0V and 0.2V.

Between times T3 and T4 the SG(D) line is biased with 4.5V until the bitline discharges at time T5. The 4.5V bias is removed from all of the lines at time T6.

One problem that might occur with NAND arrays, however, is illustrated in FIG. 1. Due to the small geometry of the NAND architecture, WL0 and SG(D) are capacitively coupled. Similarly, WL32 and SG(S) are capacitively coupled. When the 4.5V bias is applied to the SG(D) line, WL0 also increases by 1.0–1.5V above the 0.2V already on the line. This has the potential to cause read errors since the cells on WL0 are turned on when they are not supposed to be selected.

For the reasons stated above, and for other reasons stated below which will become apparent to those skilled in the art upon reading and understanding the present specification, there is a need in the art for an improved method for reading NAND memory cells.

SUMMARY

The above-mentioned problems with NAND flash memory and other problems are addressed by the present invention and will be understood by reading and studying the following specification.

The present invention encompasses a method for reading and/or verifying a NAND flash memory array. The array comprises a column of memory cells that have one end controlled by a select gate drain line and the other end controlled by a select gate source line. An input address signal is decoded to determine which cell to select. The order of biasing of the select gate drain and the select gate source lines is responsive to the position of the selected cell in the column. If the selected cell is closer to the selected gate drain line, that select gate is biased before the select gate source line.

Further embodiments of the invention include methods and apparatus of varying scope.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a timing diagram for typical prior art NAND read/verify operations.

FIG. 2 shows a schematic diagram of one embodiment of a NAND flash memory array of the present invention.

FIG. 3 shows a block diagram of one embodiment of an address decoder and NAND flash memory array of the present invention.

FIG. 4 shows a flowchart of one embodiment of the method of the present invention for reading a NAND flash memory array.

FIG. 5 shows a timing diagram for one embodiment of the method of the present invention for reading a NAND flash memory array.

FIG. 6 shows a timing diagram for another embodiment of the method of the present invention for reading a NAND flash memory array.

FIG. 7 shows a block diagram of one embodiment of an electronic system of the present invention incorporating the memory array of FIG. 2.

DETAILED DESCRIPTION

In the following detailed description of the invention, reference is made to the accompanying drawings that form

a part hereof and in which is shown, by way of illustration, specific embodiments in which the invention may be practiced. In the drawings, like numerals describe substantially similar components throughout the several views. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. Other embodiments may be utilized and structural, logical, and electrical changes may be made without departing from the scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims and equivalents thereof.

FIG. 2 illustrates a schematic diagram of one embodiment of a NAND flash memory array of the present invention. The array is comprised of a large number of memory cells **201** and **202**. The quantity of memory cells varies with the size of the memory device.

Select gate lines SG(D) **205** and SG(S) **206** are enabled when a read operation is to be performed. The biasing of the select gate lines turns on their respective control transistors **230** and **231**. The select lines **205** and **206** are biased with 4.5V during the read operation. Due to the closeness of SG(D) **205** to WL0 **201** and SG(S) to WL31 **202**, capacitive coupling occurs between these lines when the select lines are biased. This capacitance is represented in FIG. 2 by capacitors **220** and **221**. As is well known in the art, a bitline **209** is precharged to V_{CC} during a read operation.

When a wordline is not selected, it is biased at 4.5V along with SG(D) **205** and SG(S) **206**. When a word line is selected, it is at or close to 0V. When WL(0) is selected and SG(D) **205** is biased at 4.5V, the capacitance **220** between these lines causes the voltage of WL(0) to momentarily go above 1.7V thus causing the cells on that wordline to be momentarily unselected. Similarly, when WL(31) is selected and SG(S) **206** is biased at 4.5V, the capacitance **221** between these lines affects the read operation.

The method of the present invention for reading a NAND flash memory array switches the timing of the SG(D) and SG(S) biasing when an address within a predetermined range is detected. In one embodiment, this address range is the cell **201** closest to the SG(D) signal **205** or the cell **202** closest to the SG(S) signal **206**. In an alternate embodiment, the address range is the top three cells and the bottom three cells. The present invention is not limited to any one address range or ranges since distance from the select lines, composition of the select lines, and other factors may change the amount of capacitive coupling between the select lines and the nearby wordlines. In an alternate embodiment, the address ranges for the drain end of the column is different than the address range for the source end of the column.

In still another embodiment, only the addresses at the top of the column of cells cause the bias timing to switch. In this embodiment, if an address for the bottom of the column is detected, the SG(S) and SG(D) bias timing do not change.

FIG. 3 illustrates a block diagram of one embodiment of an address decoder with a NAND flash memory array of the present invention. In one embodiment, the address decoder **302** encompasses both a row decoder and a column decoder.

The memory device's address bus **305** is input to the address decoder **302**. The decoder **302** determines if the input address is within the predetermined range for a particular embodiment. If such an address is detected, the memory device controller **310** is alerted in some manner so that the timing of the generation of the select line bias voltages is changed for that particular cell location. In one embodiment, the controller **310** is alerted by an indication signal from the address decoder **302**.

FIG. 4 illustrates a flowchart of one embodiment of the method of the present invention for reading or verifying a NAND flash memory array. The method decodes the input address **401** to determine if the cell to be read or verified is within a predetermined range (e.g., top of the column). If the cell is not within the predetermined range **402**, the SG(D) and SG(S) lines are biased normally **405**. If the cell is within the predetermined range **402**, the bias timing of the SG(D) and SG(S) lines is switched **403** such that the SG(D) line is biased prior to the SG(S) line as is illustrated subsequently in FIG. 5.

FIG. 5 illustrates a timing diagram of one embodiment of the method of the present invention for reading or verifying a NAND flash memory array. In this embodiment, there are six time intervals: T1–T2 is the SG(D) set-up and bitline precharge operation, T1–T3 is the wordline set-up, T3–T4 is the SG(S) set-up, and T4–T5 is the select page read and bitline discharge. After T6, the biasing of the select gate lines and the wordlines is removed.

In the embodiment of FIG. 5, the decoded address is for a cell at the top of the column closest to the SG(D) signal. For purposes of illustration, this cell is coupled to WL0. However, the present invention is not limited to just the cells on WL0 but could have been other cells close to the top of the column of cells (e.g., WL1, WL2, WL3). The further the cell is from the select gate line, the less the capacitive coupling experienced.

When SG(D) is biased to 4.5V **500** between T1 and T2 and WL0 floats to 0.2V **503** between T1 and T3, the ramp-up of SG(D) causes WL0 to initially have a “bump” **501** in voltage between T1 and T2 before it settles down to the normal 0.2V. However, since SG(S) is biased to 4.5V **510** after this “bump” occurs (e.g., between T3 and T4), the increased voltage on WL0 does not affect the read/verify operation.

FIG. 5 also illustrates the unselected wordlines are biased to 4.5V **502**. This occurs between T1 and T3. The unselected bitlines are at 0V (i.e., “1” or erased cells) while the selected bitlines are at 1.1V (i.e., “0” or programmed cells).

FIG. 6 illustrates an alternate embodiment of the method of the present invention for reading/verifying a NAND flash memory array. In this embodiment, there are six time intervals: T1–T2 is the SG(S) set-up and bitline precharge operation, T1–T3 is the wordline set-up, T3–T4 is the SG(D) set-up, and T4–T5 is the select page read and bitline discharge. After T6, the biasing of the select gate lines and the wordlines is removed.

In the embodiment of FIG. 6, the decoded address is for a cell at the bottom of the column closest to the SG(S) signal. For purposes of illustration, this cell is coupled to WL31. However, the present invention is not limited to just the cells on WL31 but could have been other cells close to the top of the column of cells (e.g., WL28, WL29, WL30). The further the cell is from the select gate line, the less the capacitive coupling experienced.

When SG(S) is biased to 4.5V **600** between T1 and T2 and WL31 floats to 0.2V **603** between T1 and T3, the ramp-up of SG(S) causes WL31 to initially have a “bump” **601** in voltage between T1 and T2 before it settles down to the normal 0.2V. However, since SG(D) is biased to 4.5V **610** after this “bump” occurs (e.g., between T3 and T4), the increased voltage on WL31 does not affect the read/verify operation.

FIG. 6 also illustrates the unselected wordlines are biased to 4.5V **602**. This occurs between T1 and T3. The unselected bitlines are at 0V (i.e., “1” or erased cells) while the selected bitlines are at 1.1V (i.e., “0” or programmed cells).

5

While the embodiments of the present invention discuss biasing the wordlines and select gate lines at 4.5V and 0V, it is well known in the art that variations in materials and processes result in different bias voltages. These bias voltages may vary by tenths of a volt above or below the target bias voltage. Alternate embodiments that use different manufacturing processes may use voltages other than 4.5V for biasing.

FIG. 7 illustrates a functional block diagram of a memory device **700** that can incorporate the NAND flash memory cells of the present invention. The memory device **700** is coupled to a processor **710**. The processor **710** may be a microprocessor or some other type of controlling circuitry. The memory device **700** and the processor **710** form part of an electronic system **720**. The memory device **700** has been simplified to focus on features of the memory that are helpful in understanding the present invention.

The memory device includes an array of memory cells **730**. In one embodiment, the memory cells are non-volatile floating-gate memory cells and the memory array **730** is arranged in banks of rows and columns.

An address buffer circuit **740** is provided to latch address signals provided on address input connections **A0–Ax 742**. Address signals are received and decoded by a row decoder **744** and a column decoder **746** to access the memory array **730**. It will be appreciated by those skilled in the art, with the benefit of the present description, that the number of address input connections depends on the density and architecture of the memory array **730**. That is, the number of addresses increases with both increased memory cell counts and increased bank and block counts.

The memory device **700** reads data in the memory array **730** by sensing voltage or current changes in the memory array columns using sense/buffer circuitry **750**. The sense/buffer circuitry, in one embodiment, is coupled to read and latch a row of data from the memory array **730**. Data input and output buffer circuitry **760** is included for bi-directional data communication over a plurality of data connections **762** with the controller **710**. Write circuitry **755** is provided to write data to the memory array.

Control circuitry **770** decodes signals provided on control connections **772** from the processor **710**. These signals are used to control the operations on the memory array **730**, including data read, data write, and erase operations. The control circuitry **770** may be a state machine, a sequencer, or some other type of controller. The embodiments of the method of the present invention are executed by the control circuitry **770**.

The flash memory device illustrated in FIG. 7 has been simplified to facilitate a basic understanding of the features of the memory. A more detailed understanding of internal circuitry and functions of flash memories are known to those skilled in the art.

CONCLUSION

In summary, the method for reading/verifying a NAND flash memory device of the present invention alternates the select gate biasing in response to the position of the cell to be read. If the cell is close to the top of the column, the SG(D) line is biased prior to the SG(S) line. If the cell is closer to the bottom of the column, the SG(S) line is biased prior to the SG(D) line. This substantially reduces or eliminates read errors caused by capacitive coupling of the wordlines with the select gate biasing.

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary

6

skill in the art that any arrangement that is calculated to achieve the same purpose may be substituted for the specific embodiments shown. Many adaptations of the invention will be apparent to those of ordinary skill in the art. Accordingly, this application is intended to cover any adaptations or variations of the invention. It is manifestly intended that this invention be limited only by the following claims and equivalents thereof.

What is claimed is:

1. A method for reading/verifying a NAND flash memory array comprising a column of memory cells having a first end controlled by a select gate drain line and a second end controlled by a select gate source line, the method comprising:

decoding an input address signal to determine which cell to select; and

biasing the select gate drain and select gate source lines in an order responsive to a position of the selected cell in the column.

2. The method of claim 1 wherein the select gate drain and source lines are biased at a voltage substantially equal to 4.5V.

3. The method of claim 1 wherein if the selected cell is at the first end, biasing the select gate drain line prior to biasing the select gate source line.

4. The method of claim 1 wherein if the position of the selected cell is within three cells of the first end, biasing the select gate drain line prior to biasing the select gate source line.

5. A method for reading/verifying a NAND flash memory array comprising a column of series coupled memory cells having a drain end controlled by a select gate drain line and a source end controlled by a select gate source line, each cell controlled by a wordline, the method comprising:

decoding an input address signal to determine which cell to select;

if the selected cell is within a predetermined range of the drain end of the column, biasing the select gate drain line prior to biasing the select gate source line; and

if the selected cell is within a predetermined range of the source end of the column, biasing the select gate source line prior to biasing the select gate drain line.

6. The method of claim 5 and further including:

biasing the wordlines of the unselected cells of the column at a voltage substantially equal to 4.5V; and biasing the wordline of the selected cell at a voltage substantially equal to 0V.

7. A method for reading/verifying a NAND flash memory array comprising a column of series coupled memory cells having a drain end controlled by a select gate drain line and a source end controlled by a select gate source line, each cell controlled by a wordline, the method comprising:

decoding an input address signal to determine which cell to select;

if the selected cell is the first cell at the drain end of the column, biasing the select gate drain line prior to biasing the select gate source line;

if the selected cell is the last cell at the source end of the column, biasing the select gate source line prior to biasing the select gate drain line;

biasing the unselected wordlines at a first predetermined voltage; and

biasing the selected wordline at a second predetermined voltage.

8. The method of claim 7 wherein the first predetermined voltage is substantially equal to 4.5V and the second predetermined voltage is equal to 0V.

7

9. A NAND flash memory device comprising:
 a NAND memory array having columns of cells coupled
 in series, each cell selected by a wordline;
 a select gate source line coupled to a source control
 transistor at a source end of the column of cells; and
 a select gate drain line coupled to a drain control transistor
 at a drain end of the column of cells, the select gate
 drain line capable of turning on the drain control
 transistor prior to the source control transistor when a
 selected cell is within a predetermined number of cells
 of the drain control transistor.
10. The memory device of claim 9 and further including
 a bit line coupled to the drain control transistor and a source
 line coupled to the source control transistor.
11. A NAND flash memory device comprising:
 biasing wordlines to unselected cells in the column at a
 voltage substantially equal to 4.5V and a wordline to
 the selected cell at a voltage substantially equal to 0V.
12. The memory device of claim 11 and further including:
 a bitline coupled to the drain control transistor; and
 a source line coupled to the source control transistor.
13. The memory device of claim 11 wherein the source
 control transistor and the drain control transistor are turned
 on by a bias voltage.
14. A flash memory device comprising:
 an address decoder that decodes an input address;
 a NAND memory array coupled to the address decoder,
 the array having columns of cells coupled in series,
 each cell controlled by a wordline selected by the
 address decoder;
 a select gate drain line coupled to a drain control transistor
 at a drain end of the column of cells, the select gate
 drain line having a bias voltage prior to a select gate
 source line if a selected cell is within a predetermined
 range of the drain control transistor; and
 the select gate source line coupled to a source control
 transistor at a source end of the column of cells, the
 select gate source line having a bias prior to the select
 gate drain line if the selected cell is within a predeter-
 mined range of the source control transistor,
 biasing wordlines to unselected cells in the column at a
 voltage substantially equal to 4.5V and a wordline to
 the selected cell at a voltage substantially equal to 0V.
15. The memory device of claim 14 wherein the address
 decoder comprises a row decoder and a column decoder.
16. The memory device of claim 14 wherein the select
 gate drain line is capacitively coupled to the wordline of the
 selected cell.
17. The memory device of claim 14 wherein the select
 gate source line is capacitively coupled to the wordline of
 the selected cell.

8

18. An electronic system comprising:
 a processor that generates an address bus; and
 a NAND flash memory device coupled to the processor,
 the memory device comprising:
 an address decoder that decodes an address from the
 address bus;
 a NAND memory array coupled to the address decoder,
 the array having columns of cells coupled in series,
 each cell controlled by a wordline selected by the
 address decoder;
 a select gate drain line coupled to a drain control
 transistor at a drain end of the column of cells, the
 select gate drain line having a bias voltage prior to a
 select gate source line if a selected cell is within a
 predetermined range of the drain control transistor;
 and
 the select gate source line coupled to a source control
 transistor at a source end of the column of cells, the
 select gate source line having a bias prior to the
 select gate drain line if the selected cell is within a
 predetermined range of the source control transistor.
19. The electronic system of claim 18 wherein the pre-
 determine range is one cell.
20. A method for reading/verifying a NAND flash
 memory array comprising a column of memory cells having
 a first end controlled by a select gate drain line and a second
 end controlled by a select gate source line, the method
 comprising:
 decoding an input address signal to determine which cell
 to select;
 biasing the select gate drain and select gate source lines in
 an order responsive to a position of the selected cell in
 the column; and
 a NAND memory array having columns of cells coupled
 in series, each cell selected by a wordline;
 a select gate source line coupled to a source control
 transistor at a source end of the column of cells, the
 select gate source line capable of turning on the source
 control transistor prior to a drain control transistor
 when a selected cell is within a predetermined number
 of cells of the source control transistor; and
 a select gate drain line coupled to a drain control transistor
 at a drain end of the column of cells, the select gate
 drain line capable of turning on the drain control
 transistor prior to the source control transistor when the
 selected cell is within a predetermined number of cells
 of the drain control transistor.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,982,905 B2
APPLICATION NO. : 10/682585
DATED : January 3, 2006
INVENTOR(S) : Dzung H. Nguyen

Page 1 of 2

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 7

Line 16, replace “biasing wordlines to unselected cells in the column at a voltage substantially equal to 4.5V and a wordline to the selected cell at a voltage substantially equal to 0V.” with --a NAND memory array having columns of cells coupled in series, each cell selected by a wordline;
a select gate source line coupled to a source control transistor at a source end of the column of cells, the select gate source line capable of turning on the source control transistor prior to a drain control transistor when a selected cell is within a predetermined number of cells of the source control transistor; and
a select gate drain line coupled to a drain control transistor at a drain end of the column of cells, the select gate drain line capable of turning on the drain control transistor prior to the source control transistor when the selected cell is within a predetermined number of cells of the drain control transistor.--

Column 7,

Line 40, replace “control transistor, biasing wordlines to unselected cells in the column at a voltage substantially equal to 4.5V and a wordline to the selected cell at a voltage substantially equal to 0V.” with --control transistor.--

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,982,905 B2
APPLICATION NO. : 10/682585
DATED : January 3, 2006
INVENTOR(S) : Dzung H. Nguyen

Page 2 of 2


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 8,

Line 36, replace "a NAND memory array having columns of cells coupled in series, each cell selected by a wordline; a select gate source line coupled to a source control transistor at a source end of the column of cells, the select gate source line capable of turning on the the source control transistor prior to a drain control transistor when a selected cell is within a predetermined number of cells of the source control transistor; and a select gate drain line coupled to a drain control transistor at a drain end of the column of cells, the select gate drain line capable of turning on the drain control transistor prior to the source control transistor when the selected cell is within a predetermined number of cells of the drain control transistor" with --biasing wordlines to unselected cells in the column at a voltage substantially equal to 4.5V and a wordline to the selected cell at a voltage substantially equal to 0V.

Signed and Sealed this

Fifteenth Day of August, 2006

A handwritten signature in black ink on a light blue dotted background. The signature reads "Jon W. Dudas" in a cursive, stylized script. The "J" is large and loops around the "on". The "W" and "D" are also stylized.

JON W. DUDAS

Director of the United States Patent and Trademark Office