DECLARATION OF JUNE ANN MUNFORD

1. My name is June Ann Munford. I am over the age of 18, have personal knowledge of the facts set forth herein, and am competent to testify to the same.

2. I earned a Master of Library and Information Science (MLIS) from the University of Wisconsin-Milwaukee in 2009. I have over ten years of experience in the library/information science field. Beginning in 2004, I have served in various positions in the public library sector including Assistant Librarian, Youth Services Librarian and Library Director. I have attached my Curriculum Vitae as Appendix CV.

3. During my career in the library profession, I have been responsible for materials acquisition for multiple libraries. In that position, I have cataloged, purchased and processed incoming library works. That includes purchasing materials directly from vendors, recording publishing data from the material in question, creating detailed material records for library catalogs and physically preparing that material for circulation. In addition to my experience in acquisitions, I was also responsible for analyzing large collections of library materials, tailoring library records for optimal catalog

search performance and creating lending agreements between libraries during my time as a Library Director.

4. I am fully familiar with the catalog record creation process in the library sector. In preparing a material for public availability, a library catalog record describing that material would be created. These records are typically written in Machine Readable Catalog (herein referred to as "MARC") code and contain information such as a physical description of the material, metadata from the material's publisher, and date of library acquisition. In particular, the 008 field of the MARC record is reserved for denoting the date of creation of the library record itself. As this typically occurs during the process of preparing materials for public access, it is my experience that an item's MARC record indicates the date of an item's public availability.

5. Typically, in creating a MARC record, a librarian would gather various bits of metadata such as book title, publisher and subject headings among others and assign each value to a relevant numerical field. For example, a book's physical description is tracked in field 300 while title/attribution is tracked in field 245. The 008 field of the MARC record is reserved for denoting the creation of the library record itself. As this is the only date reflecting the inclusion of said materials within the library's collection, it is my experience

that an item's 008 field accurately indicates the date of an item's public availability.

6. I have reviewed Exhibit LGER1024, "Non-Uniform Constellations for ATSC 3.0" by Nabil Sven Loghin, et al. as published in *IEEE Transactions on Broadcasting*, March 2016.

7. Attached hereto as Appendix LOGHIN01 is a true and correct copy of the MARC record for *IEEE Transactions on Broadcasting* as held by the Penn State University library. I secured this record myself from the library's public catalog. The MARC record contained within Appendix LOGHIN01 accurately describes the title, author, publisher, and ISSN number of *IEEE Transactions on Broadcasting.* The '362' field of this record visible on page # indicates this collection includes the March 2016 edition of *IEEE Transactions on Broadcasting* containing "Non-Uniform Constellations for ATSC 3.0".

8. Attached hereto as Appendix LOGHIN02 is a true and correct copy of "Non-Uniform Constellations for ATSC 3.0" as published in *IEEE Transactions on Broadcasting*. I secured this PDF copy myself from the Penn State University library's digital holdings. In comparing Exhibit

LGER1024 to Appendix LOGHIN02, it is my determination that Exhibit LGER1024 is a true and correct copy of "Non-Uniform Constellations for ATSC 3.0" by Nabil Sven Loghin, et al. as published in *IEEE Transactions on Broadcasting* March 2016.

9. The 008 field of the MARC record in Appendix LOGHIN01 indicates the date of record creation. The 008 field of Appendix LOGHIN indicates the Penn State University library first acquired this journal as of June 22, 2000 and still holds this journal in perpetuity. Considering this information, it is my determination that *IEEE Transactions on Broadcasting* March 2016 and therefore "Non-Uniform Constellations for ATSC 3.0" was made available to the public shortly after its initial release in March 2016.

10. I have been retained on behalf of the Petitioner to provide assistance in the above-illustrated matter in establishing the authenticity and public availability of the documents discussed in this declaration. I am being compensated for my services in this matter at the rate of $100.00 per hour plus reasonable expenses. My statements are objective, and my compensation does not depend on the outcome of this matter.

11. I declare under penalty of perjury that the foregoing is true and correct. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code.

Dated: 12/9/2022

June Ann Munford

APPENDIX CV

J. Munford
Curriculum Vitae

Education

University of Wisconsin-Milwaukee - MS, Library & Information Science, 2009
Milwaukee, WI

- Coursework included cataloging, metadata, data analysis, library systems, management strategies and collection development.
- Specialized in library advocacy, cataloging and public administration.

Grand Valley State University - BA, English Language & Literature, 2008
Allendale, MI

- Coursework included linguistics, documentation and literary analysis.
- Minor in political science with a focus in local-level economics and government.

Professional Experience

Researcher / Expert Witness, October 2017 – present
Freelance ● Pittsburgh, Pennsylvania & Grand Rapids, Michigan

- Material authentication and public accessibility determination. Declarations of authenticity and/or public accessibility provided upon research completion. Experienced with appeals and deposition process.

- Research provided on topics of public library operations, material publication history, digital database services and legacy web resources.

- Past clients include Alston & Bird, Arnold & Porter, Baker Botts, Fish & Richardson, Erise IP, Irell & Manella, O'Melveny & Myers, Perkins-Coie, Pillsbury Winthrop Shaw Pittman and Slayden Grubert Beard.

Library Director, February 2013 - March 2015
Dowagiac District Library ● Dowagiac, Michigan

- Executive administrator of the Dowagiac District Library. Located in

Southwest Michigan, this library has a service area of 13,000, an annual operating budget of over $400,000 and total assets of approximately $1,300,000.

● Developed careful budgeting guidelines to produce a 15% surplus during the 2013-2014 & 2014-2015 fiscal years while being audited.

● Using this budget surplus, oversaw significant library investments including the purchase of property for a future building site, demolition of existing buildings and building renovation projects on the current facility.

● Led the organization and digitization of the library's archival records.

● Served as the public representative for the library, developing business relationships with local school, museum and tribal government entities.

● Developed an objective-based analysis system for measuring library services - including a full collection analysis of the library's 50,000+ circulating items and their records.

November 2010 - January 2013
Librarian & Branch Manager, Anchorage Public Library ● Anchorage, Alaska

● Headed the 2013 Anchorage Reads community reading campaign including event planning, staging public performances and creating marketing materials for mass distribution.

● Co-led the social media department of the library's marketing team, drafting social media guidelines, creating original content and instituting long-term planning via content calendars.

● Developed business relationships with The Boys & Girls Club, Anchorage School District and the US Army to establish summer reading programs for children.

June 2004 - September 2005, September 2006 - October 2013
Library Assistant, Hart Area Public Library
Hart, MI

● Responsible for verifying imported MARC records and original MARC

cataloging for the local-level collection as well as the Michigan Electronic Library.

● Handled OCLC Worldcat interlibrary loan requests & fulfillment via ongoing communication with lending libraries.

Professional Involvement

Alaska Library Association - Anchorage Chapter
● Treasurer, 2012

Library Of Michigan
● Level VII Certification, 2008
● Level II Certification, 2013

Michigan Library Association Annual Conference 2014
● New Directors Conference Panel Member

Southwest Michigan Library Cooperative
● Represented the Dowagiac District Library, 2013-2015

Professional Development

Library Of Michigan Beginning Workshop, May 2008
Petoskey, MI
● Received training in cataloging, local history, collection management, children's literacy and reference service.

Public Library Association Intensive Library Management Training, October 2011
Nashville, TN
● Attended a five-day workshop focused on strategic planning, staff management, statistical analysis, collections and cataloging theory.

Alaska Library Association Annual Conference 2012 - Fairbanks, February 2012
Fairbanks, AK
● Attended seminars on EBSCO advanced search methods, budgeting, cataloging, database usage and marketing.

Depositions

2019 ● Fish & Richardson
IPR Petitions of 865 Patent, Apple v. Qualcomm (IPR2018-001281 / 39521-00421IP & IPR2018-01282 / 39521-00421IP2)

2019 ● Erise IP
Implicit, LLC v. Netscout Systems, Inc (Civil Action No. 2:18-cv-53-JRG)

2019 ● Perkins-Coie
Adobe Inc. v. RAH Color Technologies LLC (Cases IPR2019-00627, IPR2019-00628, IPR2019-00629 and IPR2019-00646)

2020 ● O'Melveny & Myers
Maxell, Ltd. v. Apple Inc. (Case 5:19-cv-00036-RWS)

2021 ● Pillsbury Winthrop Shaw Pittman LLP
Intel v. SRC (Case IPR2020-1449)

Limited Case History & Potential Conflicts

Alston & Bird
- Nokia (v. Neptune Subsea, Xtera)

Arnold & Porter
- Ivantis (v. Glaukos)

Erise I.P.
- Apple
  - v. Future Link Systems (IPRs 6317804, 6622108, 6807505, and 7917680)
  - v. INVT
  - v. Navblazer LLC (Case No. IPR2020-01253)

v. Qualcomm (IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)

v. Quest Nettech Corp, Wynn Technologies (Case No. IPR2019-00XXX, RE. Patent Re38137)

- Fanduel (v CGT)

- Garmin (v. Phillips North America LLC, Case No. 2:19-cv-6301-AB-KS Central District of California)

- Netscout

  v. Longhorn HD LLC)

  v. Implicit, LLC (Civil Action No. 2:18-cv-53-JRG)

- Sony Interactive Entertainment LLC

  v. Bot M8 LLC

  v. Infernal Technology LLC

- Unified Patents (v GE Video Compression, Civil Action No. 2:19-cv-248)

Fish & Richardson

- Apple

  v. LBS Innovations

  v. Masimo (IPR 50095-0012IP1, 50095-0012IP2, 50095-0013IP1, 50095-0013IP2, 50095-0006IP1)

  v. Neonode

  v. Qualcomm (IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)

- Dish Network

  v. Realtime Adaptive Streaming, Case No 1:17-CV-02097-RBJ)

v. TQ Delta LLC

- Huawei (IPR 76933211)
- Kianxis
- LG Electronics (v. Bell Northern Research LLC, Case No. 3:18-cv-2864-CAB-BLM)
- Metaswitch
- MLC Intellectual Property (v. MicronTech, Case No. 3:14-cv-03657-SI)
- Realtek Semiconductor
- Quectel
- Samsung (v. Bell Northern Research, Civil Action No. 2:19-cv-00286-JRG)
- Texas Instruments

Irell & Manella

- Curium

O'Melveny & Myers

- Apple (v. Maxell, Case 5:19-cv-00036-RWS)

Perkins-Coie

- TCL Industries (v. Koninklijke Philips NV, PTAB Case Nos. IPR2021-00495, IPR2021-00496, and IPR2021-00497)

Pillsbury Winthrop Shaw Pittman

- Intel (v. FG SRC LLC, Case No. 6:20-cv-00315 W.D. Tex)

screenshot-catalog.libraries.psu.edu-2022.12.09-11_47_03
https://catalog.libraries.psu.edu/catalog/39446736/marc_view
09.12.2022

MARC View

ASK A LIBRARIAN

LEADER 02201nas a22005057a 4500			
001 39446736			
003 SIRSI			
005 20221114115454.0			
006 m o d			
007 cr n			
008 000622c19639999nyuqr pss 0 a0eng c			
010			a| 2005214269
016	7		a| 012433269 2| Uk
019			a| DO NOT EDIT this 360 MARC RECORD
022			a| 1557-9611 l| 0018-9316 y| 0018-9316
035			a| ss360mi0110684
037			b| 345 East 47 Street, New York, N.Y. 10017
040			a| NTD b| eng c| NTD d| EYM d| OCLCQ d| NSD d| U9S d| OCLCQ d| OCLCF d| OCLCO d| OCLCQ d| OCLCA d| AU@ d| UKMGB d| OCLCE d| UAB d| OCLCO d| WaSeSS
042			a| pcc a| nsdp
050	1	4	a| TK6561 b| .I2
082	1	0	a| 384 2| 13
130	0		a| IEEE transactions on broadcasting (Online)
210	0		a| IEEE trans. broadcast. b| (Online)
222		0	a| IEEE transactions on broadcasting b| (Online)
245	1	0	a| IEEE transactions on broadcasting h| [electronic resource].
246	3	0	a| Broadcasting
246	3	0	a| Transactions on broadcasting
260			a| New York : b| Institute of Electrical and Electronics Engineers
310			a| Quarterly
362	1		a| Print began in 1963.
530			a| Also issued in print.
538			a| Mode of access: World Wide Web.
588			a| Latest issue consulted: Vol. 51, no. 3 (2005) (viewed IEEE website Sept. 13, 2005).
588			a| Description based on: Vol. 34, no. 1 (Jan. 1988); title from IEEE Xplore homepage (viewed June 22, 2000).
650		0	a| Television x| Transmitters and transmission v| Periodicals.
650		0	a| Radio x| Transmitters and transmission x| Periodicals.
650		0	a| Television x| Transmitters and transmission x| Periodicals.
650		0	a| Radio x| Transmitters and transmission v| Periodicals.
655		0	a| Electronic journals.
710	2		a| IEEE Broadcast, Cable, and Consumer Electronics Society.
710	2		a| IEEE Broadcasting Group.
776	1		t| IEEE transactions on broadcasting x| 0018-9316 w| (DLC)sn 78000345 w| (OCoLC)1642875
856	4	0	u| http://SK8ES4MC2L.search.serialssolutions.com/?V=1.0&L=SK8ES4MC2L&S=JCs&C=IEEETRAONBR&T=marc
910			a| CONSER online
949			a| Electronic resource w| ASIS c| 1 i| 39446736-1001 l| ONLINE m| ONLINE r| Y s| Y t| ONLINE u| 11/26/2022 o| .STAFF. 360 MARC

PennState

Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.

Legal Statements | PSU Hotlines

PENN STATE UNIVERSITY LIBRARIES
Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory

CONNECT WITH PENN STATE UNIVERSITY LIBRARIES
Facebook
Twitter
Instagram

screenshot-catalog.libraries.psu.edu-2022.12.09-11_47_28
https://catalog.libraries.psu.edu/catalog/39446736
09.12.2022

IEEE transactions on broadcasting [electronic resource].

Uniform Title: IEEE transactions on broadcasting (Online)
Additional Titles: IEEE trans. broadcast. (Online), Broadcasting, and Transactions on broadcasting
Published: New York : Institute of Electrical and Electronics Engineers
Additional Creators: IEEE Broadcast, Cable, and Consumer Electronics Society and IEEE Broadcasting Group

ASK A LIBRARIAN

Access Online
serialssolutions.com

Dates of Publication and/or Sequential Designation:
Print began in 1963.

Subject(s):
Television—Transmitters and transmission—Periodicals
Radio—Transmitters and transmission—Periodicals

Genre(s):
Electronic journals

ISSN:
1557-9611

Publication Frequency:
Quarterly

Other Forms:
Also issued in print.

Technical Details:
Mode of access: World Wide Web.

View MARC record | catkey: 39446736

PennState
Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.
Legal Statements | PSU Hotlines
PENN STATE UNIVERSITY LIBRARIES
Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory
CONNECT WITH PENN STATE UNIVERSITY LIBRARIES
Facebook
Twitter
Instagram

IEEE.org IEEE Xplore IEEE SA IEEE Spectrum More Sites

Cart Create Account Personal Sign In

Browse My Settings Help

PENNSTATE UNIVERSITY | LIBRARIES Access provided by: Penn State University Sign Out

PENNSTATE UNIVERSITY | LIBRARIES Access provided by: Penn State University Sign Out

All

Search within Publication

ADVANCED SEARCH

Author Resources

Submission Guidelines

Submit Manuscript

Author Center

Become a Reviewer

Additional Information

Open Access Publishing Options

Browse Journals & Magazines > IEEE Transactions on Broadcast...

IEEE Transactions on Broadcasting

Submit Manuscript Add Title To My Alerts Add to My Favorites

Issue 1 | Part Special Issue | March-2016

Back to navigation

Meet the Editor

Editor-in-Chief

Yiyan Wu

Communications Research Ctr Canada

Search within results

Download PDFs | Per Page: Per Page 25 | Export | Email Selected Results

Showing 1-25 of 29

Filter

sort: Sort Sequence | Email

Refine

Author

Affiliation

[Front cover]
Publication Year: 2016 , Page(s): C1 - C1

©
[Front cover]
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

IEEE Transactions on Broadcasting publication information
Publication Year: 2016 , Page(s): C2 - C2

©
IEEE Transactions on Broadcasting publication information
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Table of contents
Publication Year: 2016 , Page(s): 153 - 153

©
Table of contents
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

ATSC 3.0 Next Generation Digital TV Standard—An Overview and Preview of the Issue
Rich Chernock; David Gómez-Barquero; Jerry Whitaker; Sung-Ik Park; Yiyan Wu
Publication Year: 2016 , Page(s): 154 - 158
Cited by: Papers (35)

Abstract HTML

ATSC 3.0 Next Generation Digital TV Standard—An Overview and Preview of the Issue
Rich Chernock; David Gómez-Barquero; Jerry Whitaker; Sung-Ik Park; Yiyan Wu
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

An Overview of the ATSC 3.0 Physical Layer Specification
Luke Fay; Lachlan Michael; David Gómez-Barquero; Nejib Ammar; M. Winston Caldwell
Publication Year: 2016 , Page(s): 159 - 171
Cited by: Papers (199) | Patents (8)

Abstract HTML

An Overview of the ATSC 3.0 Physical Layer Specification
Luke Fay; Lachlan Michael; David Gómez-Barquero; Nejib Ammar; M. Winston Caldwell
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

System Discovery and Signaling Transmission Using Bootstrap in ATSC 3.0
Dazhi He; Kevin Shelby; Mark Earnshaw; Yihang Huang; Honglian Xu; Sung-Ik Park
Publication Year: 2016 , Page(s): 172 - 180
Cited by: Papers (34) | Patents (4)

Abstract HTML

System Discovery and Signaling Transmission Using Bootstrap in ATSC 3.0
Dazhi He; Kevin Shelby; Mark Earnshaw; Yihang Huang; Honglian Xu; Sung-Ik Park
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Bit-Interleaved Coded Modulation (BICM) for ATSC 3.0
Lachlan Michael; David Gómez-Barquero
Publication Year: 2016 , Page(s): 181 - 188
Cited by: Papers (93) | Patents (6)

Abstract HTML

Bit-Interleaved Coded Modulation (BICM) for ATSC 3.0
Lachlan Michael; David Gómez-Barquero
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Low-Density Parity-Check Codes for ATSC 3.0
Kyung-Joong Kim; Seho Myung; Sung-Ik Park; Jae-Young Lee; Makiko Kan; Yuji Shinohara; Jong-Woong Shin; Jinwoo Kim
Publication Year: 2016 , Page(s): 189 - 196
Cited by: Papers (107) | Patents (21)

Abstract HTML

Low-Density Parity-Check Codes for ATSC 3.0
Kyung-Joong Kim; Seho Myung; Sung-Ik Park; Jae-Young Lee; Makiko Kan; Yuji Shinohara; Jong-Woong Shin; Jinwoo Kim
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Non-Uniform Constellations for ATSC 3.0
Nabil Svenh Loghin; Jan Zöllner; Belkacem Mouhouche; Daniel Ansorregui; Jinwoo Kim; Sung-Ik Park
Publication Year: 2016 , Page(s): 197 - 203
Cited by: Papers (108) | Patents (23)

Abstract HTML

Non-Uniform Constellations for ATSC 3.0
Nabil Svenh Loghin; Jan Zöllner; Belkacem Mouhouche; Daniel Ansorregui; Jinwoo Kim; Sung-Ik Park
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Flexible and Robust Transmission for Physical Layer Signaling of ATSC 3.0
Hongsil Jeong; Kyung-Joong Kim; Seho Myung; Jong-Woong Shin; Jinwoo Kim; Sung-Ik Park; Sunhyoung Kwon; Yijun Shi; Sang-Hyo Kim
Publication Year: 2016 , Page(s): 204 - 215
Cited by: Papers (34) | Patents (1)

Abstract HTML

Flexible and Robust Transmission for Physical Layer Signaling of ATSC 3.0
Hongsil Jeong; Kyung-Joong Kim; Seho Myung; Jong-Woong Shin; Jinwoo Kim; Sung-Ik Park; Sunhyoung Kwon; Yijun Shi; Sang-Hyo Kim
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Layered-Division-Multiplexing: Theory and Practice
Liang Zhang; Wei Li; Yiyan Wu; Xianbin Wang; Sung-Ik Park; Heung Mook Kim; Jae-Young Lee; Pablo Angueira; Jon Montalban
Publication Year: 2016 , Page(s): 216 - 232
Cited by: Papers (199) | Patents (3)

Abstract HTML

Layered-Division-Multiplexing: Theory and Practice
Liang Zhang; Wei Li; Yiyan Wu; Xianbin Wang; Sung-Ik Park; Heung Mook Kim; Jae-Young Lee; Pablo Angueira; Jon Montalban
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Low Complexity Layered Division Multiplexing for ATSC 3.0
Sung Ik Park; Jae-Young Lee; Seho Myoung; Liang Zhang; Yiyan Wu; Jon Montalbán; Sunhyoung Kwon; Bo-Mi Lim; Pablo Angueira; Heung Mook Kim; Namho Hur; Jeongchang Kim
Publication Year: 2016 , Page(s): 233 - 243
Cited by: Papers (118) | Patents (7)

Abstract HTML

Low Complexity Layered Division Multiplexing for ATSC 3.0
Sung Ik Park; Jae-Young Lee; Seho Myoung; Liang Zhang; Yiyan Wu; Jon Montalbán; Sunhyoung Kwon; Bo-Mi Lim; Pablo Angueira; Heung Mook Kim; Namho Hur; Jeongchang Kim
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

LDM Core Services Performance in ATSC 3.0
Cristina Regueiro; Jon Montalban; Jon Barrueco; Manuel Velez; Pablo Angueira; Yiyan Wu; Liang Zhang; Sung-Ik Park; Jae-Young Lee; Heung Mook Kim
Publication Year: 2016 , Page(s): 244 - 252
Cited by: Papers (44)

Abstract HTML

LDM Core Services Performance in ATSC 3.0

Cristina Regueiro; Jon Montalban; Jon Barrueco; Manuel Velez; Pablo Angueira; Yiyan Wu; Liang Zhang; Sung-Ik Park; Jae-Young Lee; Heung Mook Kim
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Physical Layer Time Interleaving for the ATSC 3.0 System
Peter Klenner; Jong-Seob Baek; Nabil Sven Loghin; David Gómez-Barquero; Woo-Suk Ko
Publication Year: 2016 , Page(s): 253 - 262
Cited by: Papers (31) | Patents (5)

Abstract HTML

Physical Layer Time Interleaving for the ATSC 3.0 System

Peter Klenner; Jong-Seob Baek; Nabil Sven Loghin; David Gómez-Barquero; Woo-Suk Ko
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Physical Layer Framing for ATSC 3.0
Mark Earnshaw; Kevin Shelby; Hakju Lee; Youngho Oh; Michael Simon
Publication Year: 2016 , Page(s): 263 - 270
Cited by: Papers (37) | Patents (12)

Abstract HTML

Physical Layer Framing for ATSC 3.0

Mark Earnshaw; Kevin Shelby; Hakju Lee; Youngho Oh; Michael Simon
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Transmit Diversity Code Filter Sets (TDCFSs), an MISO Antenna Frequency Predistortion Scheme for ATSC 3.0
Scott LoPresto; Richard Citta; David Vargas; David Gómez-Barquero
Publication Year: 2016 , Page(s): 271 - 280
Cited by: Papers (36)

Abstract HTML

Transmit Diversity Code Filter Sets (TDCFSs), an MISO Antenna Frequency Predistortion Scheme for ATSC 3.0

Scott LoPresto; Richard Citta; David Vargas; David Gómez-Barquero
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Predicting ATSC 3.0 Broadcast Coverage
James A. Kutzner; Doug Lung
Publication Year: 2016 , Page(s): 281 - 288
Cited by: Papers (9)

Abstract HTML

Predicting ATSC 3.0 Broadcast Coverage

James A. Kutzner; Doug Lung
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Channel Bonding for ATSC3.0
Lothar Stadelmeier; Daniel Schneider; Jan Zöllner; Jordi Joan Gimenez
Publication Year: 2016 , Page(s): 289 - 297
Cited by: Papers (37) | Patents (1)

Abstract HTML

Channel Bonding for ATSC3.0

Lothar Stadelmeier; Daniel Schneider; Jan Zöllner; Jordi Joan Gimenez
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

MIMO for ATSC 3.0
David Gómez-Barquero; David Vargas; Manuel Fuentes; Peter Klenner; Sangchul Moon; Jin-Yong Choi; Daniel Schneider; Kenichi Murayama
Publication Year: 2016 , Page(s): 298 - 305
Cited by: Papers (66)

Abstract HTML

MIMO for ATSC 3.0

David Gómez-Barquero; David Vargas; Manuel Fuentes; Peter Klenner; Sangchul Moon; Jin-Yong Choi; Daniel Schneider; Kenichi Murayama
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

8K Terrestrial Transmission Field Tests Using Dual-Polarized MIMO and Higher-Order Modulation OFDM
Susumu Saito; Takuya Shitomi; Shingo Asakura; Akihiko Satou; Masahiro Okano; Kenichi Murayama; Kenichi Tsuchida
Publication Year: 2016 , Page(s): 306 - 315
Cited by: Papers (55)

Abstract HTML

8K Terrestrial Transmission Field Tests Using Dual-Polarized MIMO and Higher-Order Modulation OFDM

Susumu Saito; Takuya Shitomi; Shingo Asakura; Akihiko Satou; Masahiro Okano; Kenichi Murayama; Kenichi Tsuchida
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

The ATSC Link-layer Protocol (ALP): Design and Efficiency Evaluation
Woosuk Kwon; Jaeho Hwang; Hyun-Koo Yang; Sunghee Hwang; Kazuyuki Takahashi; Lachlan Michael
Publication Year: 2016 , Page(s): 316 - 327
Cited by: Papers (12)

Abstract HTML

The ATSC Link-layer Protocol (ALP): Design and Efficiency Evaluation

Woosuk Kwon; Jaeho Hwang; Hyun-Koo Yang; Sunghee Hwang; Kazuyuki Takahashi; Lachlan Michael
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

ROUTE/DASH IP Streaming-Based System for Delivery of Broadcast, Broadband, and Hybrid Services
Gordon Kent Walker; Thomas Stockhammer; Giridhar Mandyam; Ye-Kui Wang; Charles Lo
Publication Year: 2016 , Page(s): 328 - 337
Cited by: Papers (27) | Patents (5)

Abstract HTML

ROUTE/DASH IP Streaming-Based System for Delivery of Broadcast, Broadband, and Hybrid Services

Gordon Kent Walker; Thomas Stockhammer; Giridhar Mandyam; Ye-Kui Wang; Charles Lo
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Delivery of ATSC 3.0 Services With MPEG Media Transport Standard Considering Redistribution in MPEG-2 TS Format
Kyungmo Park; Youngkwon Lim; Doug Young Suh
Publication Year: 2016 , Page(s): 338 - 351
Cited by: Papers (21)

Abstract **HTML**

Delivery of ATSC 3.0 Services With MPEG Media Transport Standard Considering Redistribution in MPEG-2 TS Format
Kyungmo Park; Youngkwon Lim; Doug Young Suh
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Dedicated Return Channel for ATSC 3.0
Dazhi He; Lianghui Ding; Yunfeng Guan; Feng Yang; Wenjun Zhang; Yiyan Wu
Publication Year: 2016 , Page(s): 352 - 360
Cited by: Papers (10)

Abstract **HTML**

Dedicated Return Channel for ATSC 3.0
Dazhi He; Lianghui Ding; Yunfeng Guan; Feng Yang; Wenjun Zhang; Yiyan Wu
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Save the date!
Publication Year: 2016 , Page(s): 361 - 361

Save the date!
IEEE Transactions on Broadcasting
Year: 2016 | Volume: 62 | Issue: 1

Load More

1 2 >

IEEE Broadcast Technology Society

IEEE Personal Account

CHANGE USERNAME/PASSWORD

Purchase Details

PAYMENT OPTIONS

VIEW PURCHASED DOCUMENTS

Profile Information

COMMUNICATIONS PREFERENCES

PROFESSION AND EDUCATION

TECHNICAL INTERESTS

Need Help?

US & CANADA: +1 800 678 4333

WORLDWIDE: +1 732 981 0060

CONTACT & SUPPORT

Follow

About IEEE *Xplore* | Contact Us | Help | Accessibility | Terms of Use | Nondiscrimination Policy | IEEE Ethics Reporting | Sitemap | IEEE Privacy Policy

A not-for-profit organization, IEEE is the world's largest technical professional organization dedicated to advancing technology for the benefit of humanity.

© Copyright 2022 IEEE - All rights reserved.

IEEE Account

» Change Username/Password

» Update Address

Purchase Details

» Payment Options

» Order History

» View Purchased Documents

Profile Information

» Communications Preferences

» Profession and Education

» Technical Interests

Need Help?

» **US & Canada:** +1 800 678 4333

» **Worldwide:** +1 732 981 0060

» Contact & Support

About IEEE *Xplore* | Contact Us | Help | Accessibility | Terms of Use | Nondiscrimination Policy | Sitemap | Privacy & Opting Out of Cookies

A not-for-profit organization, IEEE is the world's largest technical professional organization dedicated to advancing technology for the benefit of humanity.
© Copyright 2022 IEEE - All rights reserved. Use of this web site signifies your agreement to the terms and conditions.

Non-Uniform Constellations for ATSC 3.0

Nabil Sven Loghin, Jan Zöllner, Belkacem Mouhouche, Daniel Ansorregui, Jinwoo Kim, and Sung-Ik Park, *Senior Member, IEEE*

***Abstract*—This paper introduces the concept of a non-uniform constellation (NUC) in contrast to conventional uniform quadrature-amplitude modulation (QAM) constellations. Such constellations provide additional shaping gain, which allows reception at lower signal-to-noise ratios. ATSC3.0 will be the first major broadcasting standard, which completely uses NUCs due to their outstanding properties. We will consider different kinds of NUCs and describe their performance: 2-D NUCs provide more shaping gain at the cost of higher demapping complexity, while 1-D NUCs allow low-complexity demapping at slightly lower shaping gains. These NUCs are well suited for very large constellations sizes, such as 1k and 4k QAM.**

***Index Terms*—Non-uniform constellations, constellation shaping, QAM, ATSC3.0, terrestrial broadcast.**

I. Introduction

THE TRANSITION from first to second generation digital terrestrial broadcast systems, such as transition from DVB-T to DVB-T2 [1], offered a variety of new technologies and algorithms, which reduced the gap to the famous Shannon limits [2]. One major trend was the adoption of more powerful forward error correction (FEC) schemes. Cutting-edge low-density parity-check (LDPC) codes together with an outer BCH code replaced the long established combination of a convolutional code with an outer Reed-Solomon (RS) code. Similar data throughput was thus achieved at about 5dB less signal-to-noise ratio (SNR) [3]. Subsequent activities to further improve FEC schemes resulted in minor additional gains in the order of 0.01-0.3dB. Larger FEC gains were obtained at the price of higher complexity, e.g., by LDPC parity check matrices with higher density and or longer codeword lengths. Obviously, the new FEC schemes were already close to optimum. In order to further increase spectral efficiencies, the constellations had to be changed. While conventional quadrature-amplitude modulation (QAM) employed signal points on a regular orthogonal grid, so-called non-uniform constellations (NUCs) loosened this restriction.

Constellation shaping techniques have a long history: already in 1974, Foschini (now well known for his ground-breaking work on multi-antenna systems) and his colleagues proposed constellations, which minimize symbol error rates over an additive white Gaussian noise (AWGN) channel [4]. Ten years later, Forney et al. provided a mathematical proof of the ultimate shaping gain limit [5]. This limit however only applies to the so-called signal set capacity. A more realistic capacity limit is given by the bit interleaved coded modulation (BICM) capacity [7]. In [8], several known constellations (e.g., square or rectangular grids) were compared with respect to this BICM capacity. Other methods to obtain shaping gain tried to heuristically force the constellation to look Gaussian-like [9], however lacking a mathematical proof. The optimization of constellations in the 1-dimensional space with respect to BICM capacity was first described in [10]. In [11], constellations up to 32-QAM have been optimized in the 2-dimensional space to maximize BICM capacity for the AWGN channel and a range of SNR values. A summary of both optimized NUCs in both 1- and 2-dimensional space is given in [12], where constellations up to 1048576 points are examined.

In general, signal shaping can be classified into two groups: probabilistic shaping, which tackles the symbol probabilities by using a shaping encoder, and geometrical shaping by modifying the location of the constellation points. The former approach requires a shaping decoder at receiver side, which increases the overall complexity. The latter only requires to store a new set of constellation points and may require finer quantization in hardware implementations. This paper focuses only on geometrically shaped NUCs.

In March 2013, the Advanced Television Systems Committee announced a 'call for proposals' for the ATSC 3.0 physical layer, with one of the goals being to maximize spectral efficiencies [13]. It was thus not completely unexpected that the proposed technologies included both LDPC codes for FEC, and NUCs for constellations. ATSC3.0 may most likely become the first major broadcast system deploying such constellations.

This paper is structured as follows: Section II provides an introduction to the limits imposed by information theory, with focus on BICM capacity, which will be used as optimization criterion for NUCs, as discussed in Section III. Here, we will

Manuscript received August 4, 2015; revised October 20, 2015; accepted October 22, 2015. Date of publication February 25, 2016; date of current version March 2, 2016. This work was supported by the ICT Research and Development Program of MSIP/IITP under Grant R0101-15-294 through the Development of Service and Transmission Technology for Convergent Realistic Broadcast.

N. S. Loghin is with Sony Deutschland GmbH, European Technology Center, Stuttgart 70327, Germany (e-mail: nabil@sony.de).

J. Zöllner is with the Technische Universitaet Braunschweig, Braunschweig 38106, Germany (e-mail: zoellner@ifn.ing.tu-bs.de).

B. Mouhouche and D. Ansorregui are with Samsung, Staines TW18 4QE, U.K. (e-mail: b.mouhouche@samsung.com; d.ansorregui@samsung.com).

J. Kim is with LG Electronics, Seoul 137-130, Korea (e-mail: jinwoo03.kim@lge.com).

S.-I. Park is with Broadcasting System Research Group, Electronics and Telecommunication Research Institute, Daejeon 305-700, Korea (e-mail: psi76@etri.re.kr).

Color versions of one or more of the figures in this paper are available online at http://ieeexplore.ieee.org.

Digital Object Identifier 10.1109/TBC.2016.2518620

0018-9316 © 2016 IEEE. Personal use is permitted, but republication/redistribution requires IEEE permission.
See http://www.ieee.org/publications_standards/publications/rights/index.html for more information.

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

distinguish between 2-dimensional NUCs and low-complexity 1-dimensional NUCs. Simulation results are presented in Section IV, the conclusions are drawn in Section V.

II. Ultimate Communication Limits

A. Channel Capacity

In his seminal work, Shannon defined the maximum possible throughput over any given channel as the *channel capacity* [2]. The channel is fully described by its transition probabilities $p(r_k|s_k = x_l)$, where we assume a memoryless channel. The index k denotes the discrete time index, s_k and r_k are transmitted and received symbols at time k, respectively. The particular transmit symbol x_l is taken from an alphabet $\mathbb{X}$, which may be finite or infinite. For an AWGN channel, $p(r_k|s_k = x_l)$ is simply a Gaussian distributed probability density function, centered around the transmitted symbol (assuming zero-mean noise), with noise variance according to SNR. Shannon's channel capacity is the maximum mutual information (MI) between channel input s_k and output r_k, where maximization is performed over the distribution of the input alphabet $\mathbb{X}$. To keep the amount of mathematical details to a minimum, the interested reader is referred to [14]. Here, we will simply explain MI between two random variables A and B as the amount of information, which can be gained about B by observing A (or vice versa, since MI is commutative). The receiver of a communication system has an uncertainty about the potentially transmitted symbols s_k. But luckily, it can observe the channel output r_k, which helps reducing this uncertainty, and this reduction is exactly the MI. For the AWGN channel, Shannon proved that the maximum MI can be achieved, if the transmit alphabet $\mathbb{X}$ is itself Gaussian distributed, resulting in the famous capacity of $C_C = \log_2(1+\text{SNR})$, given in bits/s/Hz. This serves as an ultimate limit for the channel itself, but can never be achieved by a practical system, since an infinite number of transmit symbols has to be realized.

B. Signal Set Capacity

Another capacity limit includes the particular modulation format, in general a QAM constellation with symbols from a finite alphabet $\mathbb{X}$. The number of symbols m, i.e., the cardinality of $\mathbb{X}$, is usually a power of 2, $M = \log_2(m)$ being the number of bits, which are mapped to a symbol via a bit labelling function μ. The resulting capacity C_S is called *signal set capacity* (or sometimes coded modulation (CM) or multilevel coding (MLC) capacity), and is given by the maximum MI between the input bits of the QAM mapper and the channel output, as indicated in Figure 1. We assume equiprobable symbols x_l, i.e., each symbol occurs with probability $p(x_l) = 1/m$. Thus, no maximization of MI has to be performed, assuming that the symbols are defined by a particular constellation (e.g., located on an equidistant uniform grid). No restriction has been made about the receiver of this system, so it is assumed that a perfect receiver is decoding the symbols r_k. This can be realized by a joint symbol detector and decoder, where demapping and FEC decoding are considered as a combined unit. Multilevel codes (MLC) are one way to approach

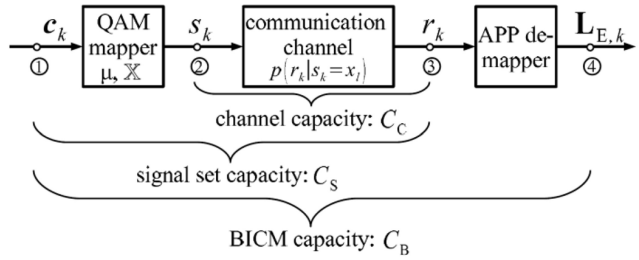

Fig. 1. Definition of channel, signal set and BICM capacity.

this limit [15], with trellis coded modulation (TCM) [16] as a special form thereof. Another way to approach C_S is to use iterative demapping and decoding as deployed in BICM-ID schemes [17], [18].

C. BICM Capacity

Finally, a more pragmatic communication system decouples symbol demapping from FEC decoding, and assumes that a QAM demapper computes soft values once, which will be forwarded to the subsequent FEC decoding stage. To fully decouple FEC encoding and mapping (especially for fading channels), an interleaver is placed between these blocks. The resulting system is thus called bit-interleaved coded modulation (BICM) [6], and the ultimate throughput limit is termed *BICM capacity* C_B [7], see Figure 1. An optimum demapper at receiver side computes a posteriori probabilities (APP) as soft values, typically in the form of (extrinsic) log-likelihood ratios (LLR), called $\mathbf{L}_{E,k}$ in Figure 1. This vector comprises all M LLRs for each of the M bits per symbol.

If C_B (in bits/s/Hz) is smaller than the overall FEC code rate, error free reception is not possible. Hence, C_B has to be large enough to provide the FEC decoder with LLRs exceeding a particular reliability level to provide low bit error rates. For a given channel realization, the only way to maximize C_B is to apply shaping to the constellations.

D. Capacity Comparisons

For the AWGN channel, the above three capacities are compared in Figure 2. The signal set capacity (here called CM capacity) and the BICM capacity are plotted for well-known uniform constellations with Gray labelling. In general $C_C > C_S \geq C_B$, but the difference between C_S and C_B is hardly visibly for Gray mappings. Both C_S and C_B converge towards M bits/s/Hz, when the SNR tends towards infinity. As can be observed, the C_B curve has a gap to the Shannon limit, which becomes larger, the bigger the constellation size is. This gap can be further reduced by using NUCs instead of conventional constellations, as described later.

While the signal set capacity is independent of the labelling function μ, the BICM capacity does depend on bit labelling. Usually, Gray labelling is deployed, where adjacent symbols differ in one bit only. It is interesting to note that constellations with more than 16 points do not have a unique class of Gray labellings, but allow for several kinds of Gray labellings, with

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

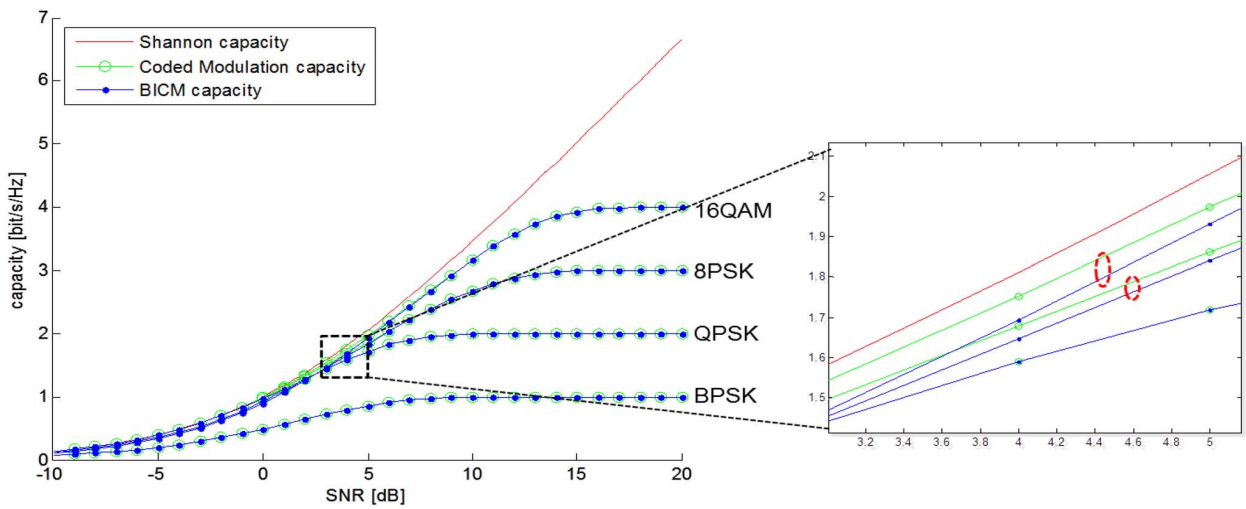

Fig. 2. Shannon's channel capacity, CM and BICM capacity.

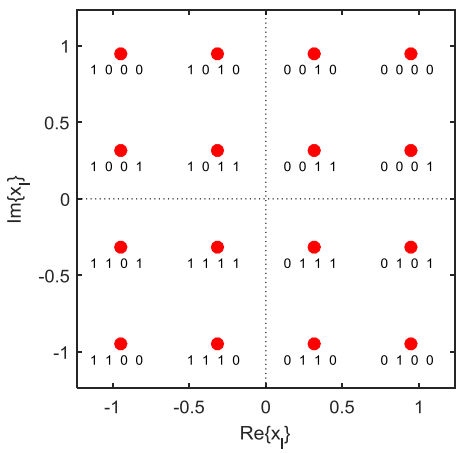

Fig. 3. Uniform 16QAM constellation with binary reflected Gray labeling.

the so-called binary reflected Gray labelling offering the maximum BICM capacity for a uniform constellation [19]. Figure 3 depicts such a labelling for a 16QAM constellation, which is deployed in systems like DVB-T or DVB-T2. The constellation points are uniformly located on an orthogonal grid with the same minimum Euclidean distance of points to their closest neighbours. Such constellations are called uniform constellations (UCs) in contrast to non-uniform constellations, which will be discussed in the following chapter.

III. Optimization of Non-uniform Constellations

When optimizing NUCs of a given constellation size m for a transmission system using a BICM chain, we need to maximize the BICM capacity C_B. The only constraint on the constellation is that the average transmit power should be constant, usually normalized to unity, i.e., the transmit symbols need to fulfil the following power constraint

$$\mathcal{P}_x = \frac{1}{m}\sum_{l=0}^{m-1} |x_l|^2 \stackrel{!}{=} 1. \tag{1}$$

The task is to maximize C_B by modifying the QAM symbols x_l, considering constraint (1). Since C_B depends on the channel transition probabilities $p(r_k|s_k = x_l)$, this optimization has to be performed for each particular channel. In particular, a different optimum NUC may result for an AWGN channel for each SNR value. For modern FEC codes, such as LDPC, with their steep bit error rate (BER) curves as a function of the SNR, the target SNR of the NUC is easily selected according to the SNR of the code's waterfall region (the SNR where the BER curve drops by several orders of magnitude), i.e., for each code rate a different NUC is used [20]. This allows for optimum performance, independent of the SNR at each user's location. When a user suffers worse SNR than the target SNR of the FEC code (and the NUC), successful decoding is anyhow not possible due to the cliff behaviour of "all-or-nothing" FEC codes. In contrast, when the actual SNR is better than the target SNR, decoding is still possible even though the constellation may not be optimal for the actual SNR. NUCs for ATSC3.0 have been optimized both with respect to performance over flat AWGN channel and over independent and identically distributed Rayleigh fading with perfect side information at receiver side. To further optimize the combination of coding and modulation, the bit interleaver was carefully optimized as well for each combination of constellation size and code rate.

The degrees of freedom (DOF) for the optimization are the m complex symbols $x_l \in \mathbb{X}$. In the following, we will describe two different optimization approaches.

A. Two Dimensional NUCs

All m complex DOFs will be considered to optimize 2D NUCs, i.e., $2m$ real-valued DOFs have to be optimized. For a 16QAM, this results in 32 DOFs. To reduce the number of DOFs of 2D NUCs by a factor of four, quadrant symmetry can be assumed [12]. In general, one DOF can be fixed due to power constraint (1), but this depends on the way the optimization problem is solved. Since capacity functions are in general

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

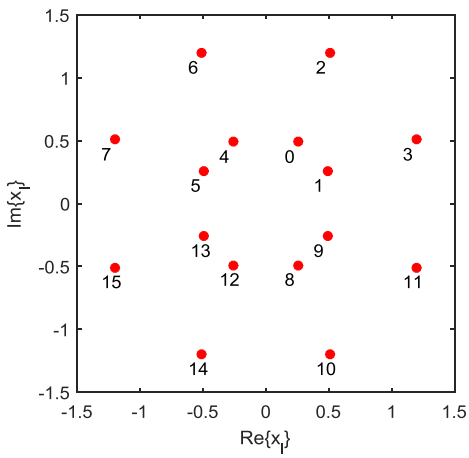

Fig. 4. Optimized 2D 16NUC for ATSC3.0 for LDPC of rate 7/15.

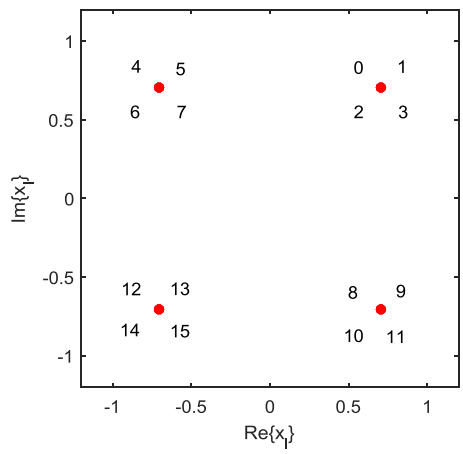

Fig. 5. Optimized 2D 16NUC for ATSC3.0 for LDPC of rate 2/15.

non-convex, optimization thereof relies on numerical tools such as non-linear gradient search algorithms. Some optimization methods consider a two-step approach of an unconstrained optimization followed by a radial contraction to comply the power constraint in a second step [4], others apply constrained quadratic programming methods [21] or yet other tools.

As an example, Figure 4 shows a NUC with 16 constellation points (called 16NUC), which has been optimized for ATSC3.0 for a combination with an LDPC code of code rate 7/15. The bit labels are given as integer numbers, with 0000 corresponding to 0, 0001 to 1, and so on (least significant bit is the right-most label). The constellation resembles a 16APSK (amplitude phase shift keying), but a closer view reveals four different amplitudes, not only two. Nevertheless, all 2D NUCs from ATSC3.0 offer a symmetry with respect to the four quadrants, i.e., the complete constellation can be derived from the first quadrant by simple rotation rules. The target SNR for the AWGN channel of this NUC was about 5.3dB. At this SNR, the uniform 16QAM from Figure 3 offers a BICM capacity of C_B(5.3dB, 16QAM) = 2.00 bits/s/Hz. The optimized 16NUC from Figure 4 offers at the same SNR C_B(5.3dB, 16NUC) = 2.04 bit/s/Hz, i.e., 0.04 bits/s/Hz more, which corresponds to a theoretical SNR gain of about 0.16dB. In practice, the gain in bit error rates simulations was about 0.2dB.

To understand the outcome of an optimized NUC, let us focus on an extreme case, where the target SNR for the AWGN channel is chosen extremely low. The outcome can be seen in Figure 5, which is a 16NUC for code rate 2/15. This very low code rate allows receiving this constellation at about -2.6dB SNR. Only four points are visible, resembling the classical quadrature phase shift keying (QPSK) constellation, but in fact, these are four clusters consisting of four almost identical points. The reason why this constellation still works fine at very low SNR is that at least two out of $M = 4$ bit labels offer robust MI: the first two most significant bits (left-most labels) offer similar robustness as the two bit positions of a QPSK, which is optimum for four constellation points (maximizing Euclidean distance, while maintaining independent dimensions for each bit). The other two weaker bit levels are "sacrificed" for this purpose, since they cannot be resolved anymore from the (almost) overlapping points. The bit-wise MI of those weak bits is close to 0 and will remain so, even for very large SNR. In general, NUCs of all constellation sizes converge towards a "QPSK-like" constellation, if target SNR goes to very small values, i.e., four clusters will remain with $m/4$ overlapping points each.

As another extreme case, consider the application for very large code rates, i.e., very large target SNR. In such cases, the NUCs tend to become uniform QAM constellations, with the BICM capacity converging towards M bits/s/Hz. This implies that conventional uniform QAM constellations are only optimum for uncoded systems, if SNR is significantly large, but in combination with FEC coding, they are outperformed by NUCs.

Note from Figure 4 that the four bit levels cannot be demapped independently. A uniform QAM such as the one from Figure 3 on the other hand allows demapping half of the bits independently from the other half. In case of the depicted 16QAM, the first and third bit label are mapped to the real part of the constellation, while the second and forth bit label are mapped to the imaginary part. Thus, demapping can be split into two independent demappers for each dimension: effectively, only a real-valued pulse amplitude modulation (PAM) is demapped on each axis, resulting in much lower complexity.

B. One Dimensional NUCs

To exploit the properties of two independent dimensions as in uniform QAM constellations, the NUC is reduced to a one-dimensional PAM with non-uniform points. Both real and imaginary component of the NUC are formed by the same PAM. An m-ary complex constellation is thus reduced to $\sqrt{m}$ real-valued points. We may further assume symmetry to the origin, resulting in only $\sqrt{m}/2$ real-value points (again, one of these points may be normalized due to power constraint (1)). The resulting NUC will be called 1D NUC.

For example, a 1024QAM (also called 1k QAM) has 2048 real-valued DOFs for 2D NUCs, but only 16 DOFs for 1D NUCs. The optimization process itself is greatly eased by

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

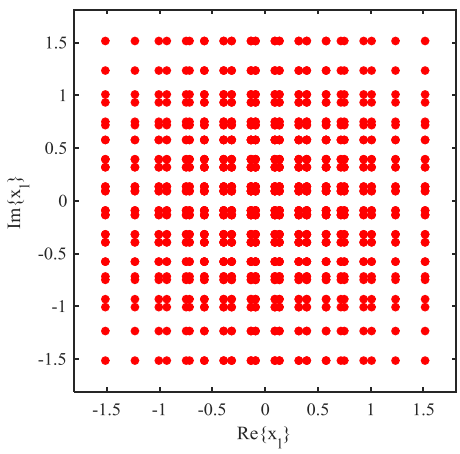

Fig. 6. Optimized 1D 1k NUC for ATSC3.0 for LDPC of rate 7/15.

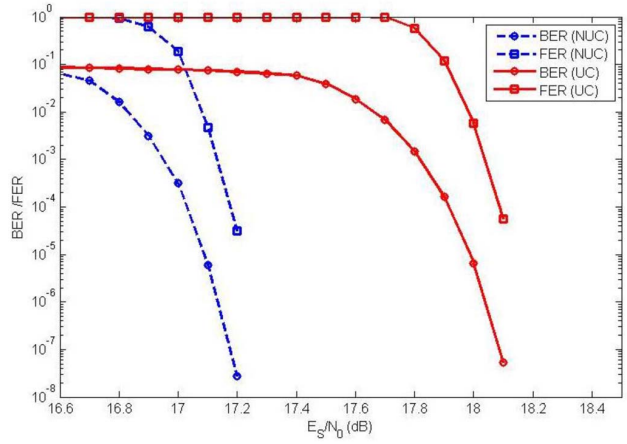

Fig. 7. Shaping gain of conventional uniform constellation (UC) versus NUC for 256QAM and 64k LDPC of rate 10/15 over AWGN channel.

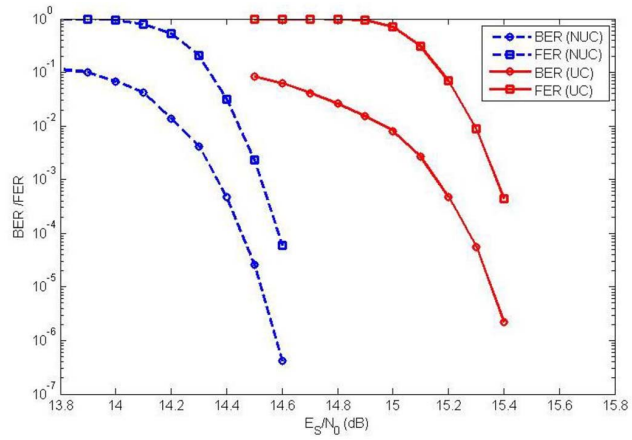

Fig. 8. Shaping gain of conventional uniform constellation (UC) versus NUC for 256QAM and 64k LDPC of rate 7/15 over Rayleigh i.i.d. channel.

this limitation, but mostly, the complexity reduction for the demapper is an important feature. Maximum likelihood (ML) demapping of a 2D NUC has to consider all m constellation points for APP computation, but only $2 \cdot \sqrt{m}$ candidates for 1D NUCs (the factor 2 arises from 2 independent PAM demapping processes).

For ATSC3.0, 16QAM, 64QAM and 256QAM have been optimized as 2D NUCs, but for 1k and 4k constellations, lower complexity 1D NUCs have been proposed. The drawback of 1D NUCs is that the restriction of DOFs results in slightly smaller shaping gains compared with the 2D variants. Figure 6 shows as an example a 1D NUC with 1024 constellation points (1k NUC), optimized for an LDPC of rate 7/15. Both real and imaginary component apply the same 32PAM, and half of the bit labels (not shown in the figure) are mapped independent of the other half to each dimension.

It can be shown empirically (not shown here) that 2D NUCs offer about 0.2-0.3dB more shaping gain compared with 1D NUCs of the same constellation size due to the larger number of DOFs for NUC optimization.

IV. Simulation Results

ATSC3.0 offers a large variety of modulation and coding combinations, called MODCODs [22]: LDPC codes have either 64800 or 16200 bits as codeword lengths (64k or 16k codes, respectively), with code rates ranging from 2/15 to 13/15, in steps of 1/15 [23]. 64k codes have better performance than their shorter counterparts, but require more memory for decoding and have some impact on latency and power consumption. Constellations in ATSC3.0 range from very robust QPSK modulation over 16NUC to 4096NUC, each constellation carefully optimized for the LDPC code rate. The same constellation is used for both 16k and 64k LDPC, since the LDPC performance difference is rather small (less than 0.5dB on average) and to reduce the amount of different constellations.

Figure 7 depicts bit and frame error rates (BER and ER, resp.) over the AWGN channel, when using a 64k LDPC of rate 10/15 and an outer BCH code together with a traditional uniform 256QAM, in comparison with the optimized 256NUC from ATSC3.0 for this MODCOD. At FER = 10^{-4}, the NUC constellation allows reception at SNR level (here E_s/N_0) being 0.91dB lower than that for the uniform counterpart.

As pointed out before, ATSC3.0 NUCs have been designed considered both AWGN and Rayleigh fading channels. Figure 8 demonstrates the performance of a 256NUC, using 64k LDPC of lower rate 7/15. The channel is a passive one-tap Rayleigh fading channel, with fading coefficients being independent identically distributed (i.i.d.), which models a fully interleaved fading channel. Compared with the state-of-the-art uniform constellation, the SNR gain at FER = 10^{-4} is 0.9dB.

Such SNR gains, also called shaping gains, in dB, are summarized in Figure 9 for 64k codes of rates 2/15 until 13/15 for the AWGN channel of NUCs proposed for ATSC3.0 versus conventional uniform constellations of the same size. As a rule-of-thumb, shaping gains tend towards 0 for extremely small or large code rates ("(almost) all constellations are equally bad or good, respectively"), with a maximum shaping gain for rates around 7/15. However, for lower constellation sizes, such as 16QAM and 64QAM, an impressive gain is still

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

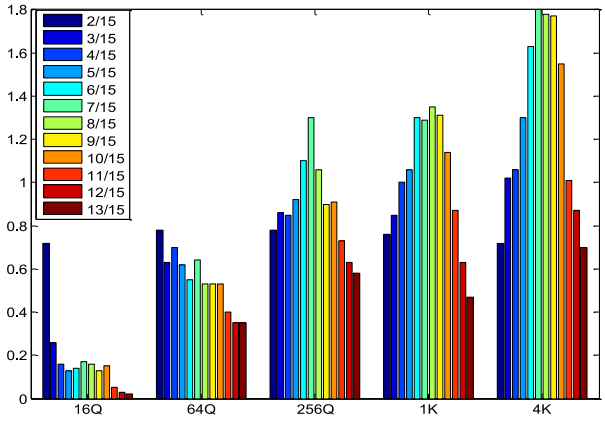

Fig. 9. Performance gains in dB of ATSC3.0 NUCs versus uniform constellations over AWGN channel.

possible also for low code rates like 2/15. Further, shaping gains become larger the larger the constellation size is. The reasons are that more DOFs are available for optimization, but also that larger uniform constellations result in a bigger gap to the Shannon limit, as shown in Figure 2. For 16NUC, only 0.2dB gains can be expected for 2D NUCs (almost no gain for 1D NUCs – not shown), while 256NUCs already exceed 1dB of shaping gains. For 1k and larger NUCs, up to 1.8dB are possible, which is well above the famous shaping gain limit of 1.53dB derived in [5]. However, this limit holds only for NUCs optimized with respect to signal set capacity C_S. The ultimate shaping gain limit with respect to BICM capacity C_B is still to be derived.

V. Conclusion

In this paper, we presented non-uniform constellations (NUCs), carefully designed for the ATSC3.0 physical layer. The design considered different channel realizations, and took the combination of LDPC code and bit interleaver into account. Results showed that shaping gains of more than 1.5dB are possible, which can be seen as a major step towards the ultimate limits of communications and which qualifies ATSC3.0 to become a future-proof cutting-edge terrestrial broadcast standard.

Acknowledgment

The authors like to thank the members of ATSC3.0 physical layer standardization groups for promising contributions in various fields, accurate evaluation processes and fruitful discussions.

References

[1] I. Eizmendi *et al.*, "DVB-T2: The second generation of terrestrial digital video broadcasting system," *IEEE Trans. Broadcast.*, vol. 60, no. 2, pp. 258–271, Jun. 2014.

[2] C. E. Shannon, "A mathematical theory of communication," *Bell Lab. Syst. J.*, vol. 27, p. 535, Jul./Oct. 1948.

[3] Digital Video Broadcasting (DVB), *Implementation Guidelines for a Second Generation Digital Terrestrial Television Broadcasting System*, document ETSI TS 102 831 V1.2.1, ETSI, Sophia Antipolis, France, 2012.

[4] G. J. Foschini, R. Gitlin, and S. Weinstein, "Optimization of two-dimensional signal constellations in the presence of Gaussian noise," *IEEE Trans. Commun.*, vol. 22, no. 1, pp. 28–38, Jan. 1974.

[5] G. D. Forney, Jr., R. G. Gallager, G. Lang, F. M. Longstaff, and S. U. Qureshi, "Efficient modulation for band-limited channels," *IEEE J. Sel. Areas Commun.*, vol. 2, no. 5, pp. 632–647, Sep. 1984.

[6] G. Caire, G. Taricci, and E. Biglieri, "Bit-interleaved coded modulation," *IEEE Trans. Inf. Theory*, vol. 44, no. 3, pp. 927–946, May 1998

[7] G. Caire, G. Taricco, and E. Biglieri, "Capacity of bit-interleaved channels," *IEE Electron. Lett.*, vol. 32, no. 12, pp. 1060–1061, Jun. 1996.

[8] S. Y. L. Goff, "Signal constellations for bit-interleaved coded modulation," *IEEE Trans. Inf. Theory*, vol. 49, no. 1, pp. 307–313, Jan. 2003.

[9] C. Fragouli, R. D. Wesel, D. Sommer, and G. P. Fettweis, "Turbo codes with non-uniform constellations," in *Proc. IEEE ICC*, Helsinki, Finland, Jun. 2001, pp. 70–73.

[10] M. F. Barsoum, C. Jones, and M. Fitz, "Constellation design via capacity maximization," in *Proc. IEEE Int. Symp. Inf. Theory*, Nice, France, Jun. 2007, pp. 1821–1825.

[11] N. S. Muhammad, "Coding and modulation for spectral efficient transmission," Ph.D. dissertation, Inst. Nachrichtenübertragung, Univ. Stuttgart, Stuttgart, Germany, 2010.

[12] J. Zoellner and N. Loghin, "Optimization of high-order non-uniform QAM constellations," in *Proc. IEEE Int. Symp. Broadband Multimedia Syst. Broadcast.(BMSB)*, London, U.K., Jun. 2013, pp. 1–6.

[13] Call for Proposals for ATSC 3.0 Physical Layer—A Terrestrial Broadcast Standard, ATSC Technology Group 3 (ATSC 3.0), Mar. 2013.

[14] R. G. Gallager, *Information Theory and Reliable Communication.* New York, NY, USA: Wiley, 1968.

[15] U. Wachsmann, R. F. H. Fischer, and J. B. Huber, "Multilevel codes: Theoretical concepts and practical design rules," *IEEE Trans. Inf. Theory*, vol. 45, no. 5, pp. 1361–1391, Jul. 1999.

[16] G. Ungerböeck, "Channel coding with multilevel/phase signals," *IEEE Trans. Inf. Theory*, vol. 28, no. 1, pp. 55–67, Jan. 1982.

[17] S. ten Brink, J. Speidel, and R.-H. Yan, "Iterative demapping and decoding for multilevel modulation," in *Proc. IEEE Glob. Telecommun. Conf. (GLOBECOM)*, vol. 1. Sydney, NSW, Australia, Nov. 1998, pp. 579–584.

[18] N. S. Muhammad and J. Speidel, "Joint optimization of signal constellation and bit labeling for bit-interleaved coded modulation with iterative decoding," *IEEE Commun. Lett.*, vol. 9, no. 9, pp. 775–777, Sep. 2005.

[19] C. Stierstorfer and R. F. H. Fischer, "(Gray) mappings for bit-interleaved coded modulation," in *Proc. IEEE Veh. Technol. Conf. (VTC)*, Dublin, Irleand, Apr. 2007, pp. 1703–1707.

[20] B. Mouhouche, D. Ansorregui, and A. Mourad, "High order non-uniform constellations for broadcasting UHDTV," in *Proc. IEEE Wireless Commun. Netw. Conf.*, Istanbul, Turkey, Apr. 2014, pp. 600–605.

[21] E. Çela, *The Quadratic Assignment Problem: Theory And Algorithms.* Boston, MA, USA: Kluwer Academic, 1998.

[22] L. Michael and D. Gómez-Barquero, "Bit interleaved coding and modulation for ATSC 3.0," *IEEE Trans. Broadcast.*, vol. 63, no. 1, pp. 1–8, Mar. 2016.

[23] K. Kim *et al.*, "Low density parity check code for ATSC 3.0," *IEEE Trans. Broadcast.*, vol. 63, no. 1, Mar. 2016.

Nabil Sven Loghin received the Diploma degree in electrical engineering and the Ph.D. degree from the University of Stuttgart, Germany, in 2004 and 2010, respectively, both with *summa cum laude*. Since 2009, he has been with Sony, working on DTV standardization and communication systems. His research interests include channel coding, iterative decoding, QAM mapping optimization, and multiple-antenna communications.

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.

Jan Zöllner received the Diploma degree in computer science and communications technology engineering from Technische Universitaet Braunschweig, in 2010. His diploma thesis resulted in the implementation of a DVB-C measurement receiver in MATLAB. He joined the Institut für Nachrichtentechnik, Technische Universitaet Braunschweig, where he was involved in the development of DVB-NGH. He is currently the Chair of DVB's Study Mission on co-operative spectrum use.

Belkacem Mouhouche received the Ph.D. degree in signal processing from the l'Ecole Nationale Superieure des Telecoms (Telecom ParisTech), in 2005. He joined Freescale Semiconductor to work on advanced receivers for 3GPP HSPA+. He later held different positions related to 3GPP standardization and implementation for major telecommunication companies. Since 2012, he has been with Samsung Electronics where his research focuses on the physical layer of future broadcast and broadband systems.

Daniel Ansorregui received the M.S. degree in telecommunications engineering from the University of the Basque Country, Spain, in 2011. Since 2013, he has been with Samsung Electronics Research, U.K., at the Standard Department. His main work focuses on ATSC 3.0 standard PHY layer development with special focus on LDPC and modulation and synchronization systems. He is currently working with Android Graphics Technologies.

Jinwoo Kim received the B.S.E.E. degree from Hanyang University, Seoul, Korea, in 2001, and the M.S.E.E. degree from POSTECH, Pohang, Korea, in 2003. Since 2003, he has been with LG Electronics. His research interests include digital communications and signal processing.

Sung-Ik Park received the B.S.E.E. degree from Hanyang University, Seoul, Korea, in 2000, the M.S.E.E. degree from POSTECH, Pohang, Korea, in 2002, and the Ph.D. degree from Chungnam National University, Daejeon, Korea, in 2011. Since 2002, he has been with the Broadcasting System Research Group, Electronics and Telecommunication Research Institute, where he is a Senior Member of Research Staff. His research interests are in the area of error correction codes and digital communications, in particular, signal processing for digital television. He currently serves as an Associate Editor of the IEEE Transactions on Broadcasting and a Distinguished Lecturer of the IEEE Broadcasting Technology Society.

Authorized licensed use limited to: Penn State University. Downloaded on December 09,2022 at 15:52:55 UTC from IEEE Xplore. Restrictions apply.