

AFFIDAVIT OF NATHANIEL E FRANK-WHITE

1. I am a Records Request Processor at the Internet Archive. I make this declaration of my own personal knowledge.

2. The Internet Archive is a website that provides access to a digital library of Internet sites and other cultural artifacts in digital form. Like a paper library, we provide free access to researchers, historians, scholars, and the general public. The Internet Archive has partnered with and receives support from various institutions, including the Library of Congress.

3. The Internet Archive has created a service known as the Wayback Machine. The Wayback Machine makes it possible to browse more than 450 billion pages stored in the Internet Archive's web archive. Visitors to the Wayback Machine can search archives by URL (i.e., a website address). If archived records for a URL are available, the visitor will be presented with a display of available dates. The visitor may select one of those dates, and begin browsing an archived version of the Web. Links on archived files in the Wayback Machine point to other archived files (whether HTML pages or other file types), if any are found for the URL indicated by a given link. For instance, the Wayback Machine is designed such that when a visitor clicks on a hyperlink on an archived page that points to another URL, the visitor will be served the archived file found for the hyperlink's URL with the closest available date to the initial file containing the hyperlink.

4. The archived data made viewable and browsable by the Wayback Machine is obtained by use of web archiving software that automatically stores copies of files available via the Internet, each file preserved as it existed at a particular point in time.

5. The Internet Archive assigns a URL on its site to the archived files in the format http://web.archive.org/web/[Year in yyyy][Month in mm][Day in dd][Time code in hh:mm:ss]/[Archived URL] aka an "extended URL". Thus, the extended URL http://web.archive.org/web/19970126045828/http://www.archive.org/ would be the URL for the record of the Internet Archive home page HTML file (http://www.archive.org/) archived on January 26, 1997 at 4:58 a.m. and 28 seconds (1997/01/26 at 04:58:28). The date indicated by an extended URL applies to a preserved instance of a file for a given URL, but not necessarily to any other files linked therein. Thus, in the case of a page constituted by a primary HTML file and other separate files (e.g., files with images, audio, multimedia, design elements, or other embedded content) linked within that primary HTML file, the primary HTML file and the other files will each have their own respective extended URLs and may not have been archived on the same dates.

6. Attached hereto as Exhibit B are true and accurate copies of the Internet Archive's records of the archived files for the URLs and the dates specified in the attached coversheet of each file.

INTERNET ARCHIVE
archive.org

7. I declare under penalty of perjury that the foregoing is true and correct.

DATE: 03/29/2023

Nathaniel Frank-White

Nathaniel E Frank-White

Please see attached
All Purpose
Jurat form
for additional
Notary Events

EXHIBIT B

https://web.archive.org/web/20030703022543/https://www.xilinx.com/publications/products/v2pro/ug_pdf/ug012.pdf

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 4 of 947

Virtex-II Pro™ Platform FPGA User Guide

UG012 (v2.4) June 30, 2003

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 5 of 947



"Xilinx" and the Xilinx logo shown above are registered trademarks of Xilinx, Inc. Any rights not expressly granted herein are reserved.

CoolRunner, RocketChips, Rocket IP, Spartan, StateBENCH, StateCAD, Virtex, XACT, XC2064, XC3090, XC4005, and XC5210 are registered trademarks of Xilinx, Inc.



The shadow X shown above is a trademark of Xilinx, Inc.

ACE Controller, ACE Flash, A.K.A. Speed, Alliance Series, AllianceCORE, Bencher, ChipScope, Configurable Logic Cell, CORE Generator, CoreLINX, Dual Block, EZTag, Fast CLK, Fast CONNECT, Fast FLASH, FastMap, Fast Zero Power, Foundation, Gigabit Speeds...and Beyond!, HardWire, HDL Bencher, IRL, J Drive, JBits, LCA, LogiBLOX, Logic Cell, LogiCORE, LogicProfessor, MicroBlaze, MicroVia, MultiLINX, NanoBlaze, PicoBlaze, PLUSASM, PowerGuide, PowerMaze, QPro, Real-PCI, RocketIO, SelectIO, SelectRAM, SelectRAM+, Silicon Xpresso, Smartguide, Smart-IP, SmartSearch, SMARTswitch, System ACE, Testbench In A Minute, TrueMap, UIM, VectorMaze, VersaBlock, VersaRing, Virtex-II Pro, Virtex-II EasyPath, Wave Table, WebFITTER, WebPACK, WebPOWERED, XABEL, XACT-Floorplanner, XACT-Performance, XACTstep Advanced, XACTstep Foundry, XAM, XAPP, X-BLOX +, XC designated products, XChecker, XDM, XEPLD, Xilinx Foundation Series, Xilinx XDTV, Xinfo, XSI, XtremeDSP and ZERO+ are trademarks of Xilinx, Inc.

The Programmable Logic Company is a service mark of Xilinx, Inc.

All other trademarks are the property of their respective owners.

Xilinx, Inc. does not assume any liability arising out of the application or use of any product described or shown herein; nor does it convey any license under its patents, copyrights, or maskwork rights or any rights of others. Xilinx, Inc. reserves the right to make changes, at any time, in order to improve reliability, function or design and to supply the best product possible. Xilinx, Inc. will not assume responsibility for the use of any circuitry described herein other than circuitry entirely embodied in its products. Xilinx provides any design, code, or information shown or described herein "as is." By providing the design, code, or information as one possible implementation of a feature, application, or standard, Xilinx makes no representation that such implementation is free from any claims of infringement. You are responsible for obtaining any rights you may require for your implementation. Xilinx expressly disclaims any warranty whatsoever with respect to the adequacy of any such implementation, including but not limited to any warranties or representations that the implementation is free from claims of infringement, as well as any implied warranties of merchantability or fitness for a particular purpose. Xilinx, Inc. devices and products are protected under U.S. Patents. Other U.S. and foreign patents pending. Xilinx, Inc. does not represent that devices shown or products described herein are free from patent infringement or from any other third party right. Xilinx, Inc. assumes no obligation to correct any errors contained herein or to advise any user of this text of any correction if such be made. Xilinx, Inc. will not assume any liability for the accuracy or correctness of any engineering or software support or assistance provided to a user.

Xilinx products are not intended for use in life support appliances, devices, or systems. Use of a Xilinx product in such applications without the written consent of the appropriate Xilinx officer is prohibited.

The contents of this manual are owned and copyrighted by Xilinx. Copyright 1994-2003 Xilinx, Inc. All Rights Reserved. Except as stated herein, none of the material may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx. Any unauthorized use of any material contained in this manual may violate copyright laws, trademark laws, the laws of privacy and publicity, and communications regulations and statutes.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 6 of 947

Virtex-II Pro™ Platform FPGA User Guide
UG012 (v2.4) June 30, 2003

The following table shows the revision history for this document. All revision publications are electronic only (PDF) unless otherwise noted.

	Version	Revision
01/31/02	1.0	(Print Edition.) Initial Xilinx release.
10/14/02	2.0	(Print Edition.) Updated and reprinted. New Virtex-II Pro family members and packages. Revised I/O support information.
12/04/02	2.1	Added full support for 3.3V I/O standards PCI-X, LVTTL, and LVCMOS33.
01/23/03	2.2	• Added wire-bond package FG676 for XC2VP20, 30, and 40. New package diagram (Figure 5-62) and pinout diagrams (Figure 5-11 through Figure 5-15). Revised Table 5-6. • Removed pinout diagrams and other references for XC2VP40FF1517. • Revised material in, and added Figure 4-4 to, section "Mixed Voltage Environments," page 288. • Clariified explanation of banks 4/5 V_{CCO} settings for configuration vs. operation in section "Special VCCO Requirements during Configuration and Readback," page 289.
04/11/03	2.3	• Table 3-38, Table 3-39: Corrected package type FG672 to FF672, and added package type FG676. • Deleted (former) Table 3-3, Power-Up Timing Characteristics, and replaced it with a hyperlink to Data Sheet Module 3. • Deleted (former) Table 1-5, Multiplier Switching Characteristics, and replaced it with a hyperlink to Data Sheet Module 3. • Changed attribute CLOCK_FEEDBACK to CLK_FEEDBACK. • Clarifying text added to section "Phase Shift Enable - PSEN" in Chapter 3. • Additional implementation rule added to section "DCI in Virtex-II Pro Hardware" in Chapter 3. • Corrections made in command line, key file, and key file command line equivalent in section "Creating Keys" in Chapter 3. • Added device-specific parameters to step 15 of "Single Device Configuration Sequence" in Chapter 4. • Section "Data Loading" in Chapter 4: Corrected maximum frequency for SelectMAP configuration without BUSY handshaking to 5 MHz. • Table 4-8: Corrected maximum SelectMAP frequency (F_{CC}_SelectMAP) to 50 MHz. • Appendix A, "BitGen and PROMGen Switches and Options": Updated all command-line options to correlate with development tools and their documentation. • Table 3-59: Added numerous LVDS primitives to this table, including new differential termination primitives. • Added new section "LVDS Input HDL Examples." • Changed Figure 3-120 to show internal rather than external differential input termination. • Various minor edits.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 7 of 947

	Version	Revision
06/30/03	2.4	• Corrected Location Constraints syntax, multiple instances. • Added Figure 3-23, page 85 and associated explanatory text. • Added HDL code for resetting the DCM after configuration in section "External Feedback," page 87. • Modified Banking Rules in section "DCI in Virtex-II Pro Hardware," page 228. • Added reference to Answer Record 13012 in section "SSTL2_ I_DCI, SSTL2_II_DCI," page 229. • Corrected command-line equivalent statements for bitstream encryption key files in section "Creating Keys," page 260. • Added new section "Abort," page 302, to section "Master SelectMAP Programming Mode". • Corrected shading property of GND pin in symbol key, all diagrams, section "Pinout Diagrams," page 355. • Numerous additional minor edits.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 8 of 947

Table of Contents

Preface: About This Guide

Guide Contents 13
Additional Resources 14
Conventions 14
Typographical 14
Online Document 15

Chapter 1: Introduction to the Virtex-II Pro™ FPGA Family

The Next Logical Revolution 17
Built for Bandwidth 17
Legacy of Leadership 18
Packets Everywhere 19
Bridge, Anyone? 19
Simplifying Complexity 19
Time Is Money 20
Flexibility Is Money 21
Not Being Discrete 21

Chapter 2: Timing Models

Summary 23
Introduction 23
CLB / Slice Timing Models 24
General Slice Timing Model and Parameters 24
Slice Distributed RAM Timing Model and Parameters 27
Slice SRL Timing Model and Parameters 30
Block SelectRAM Timing Model 32
Embedded Multiplier Timing Model 36
IOB Timing Models 38
IOB Input Timing Model and Parameters 39
IOB Output Timing Model and Parameters 43
IOB 3-State Timing Model and Parameters 46
Pin-to-Pin Timing Models 50
Global Clock Input to Output 51
Global Clock Setup and Hold 53
Digital Clock Manager Timing Model 55
Operating Frequency Ranges 55
Input Clock Tolerances 57
Output Clock Precision 58
Miscellaneous DCM Timing Parameters 58
Additional Timing Models in Other Publications:
PPC405 Processor Block and RocketIO Transceiver 60

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 9 of 947

IBM PPC405 Processor Block Timing Models 60
RocketIO Transceiver Timing Models 60

Chapter 3: Design Considerations

Summary 61
Introduction 61
RocketIO Transceiver 62
Processor Block 62
Global Clock Networks 62
Introduction 62
Clock Distribution Resources 63
Power Consumption 72
Library Primitives and Submodules 73
Characteristics 77
Location Constraints 78
Secondary Clock Network 78
VHDL and Verilog Instantiation 78
Digital Clock Managers (DCMs) 83
Overview 83
Clock De-Skew 84
Legacy Support 90
Frequency Synthesis 93
Phase Shifting 97
DCM Waveforms 113
Block SelectRAM™ Memory 117
Introduction 117
Synchronous Dual-Port and Single-Port RAM 117
Characteristics 121
Library Primitives 121
VHDL and Verilog Instantiation 123
Port Signals 123
Address Mapping 125
Attributes 125
Initialization in VHDL or Verilog Codes 127
Location Constraints 127
Applications 127
VHDL and Verilog Templates 128
Distributed SelectRAM Memory 134
Introduction 134
Characteristics 136
Library Primitives 136
VHDL and Verilog Instantiation 137
Ports Signals 138
Attributes 138
Initialization in VHDL or Verilog Codes 139
Location Constraints 139
Applications 141
VHDL and Verilog Templates 142
Look-Up Tables as Shift Registers (SRLs) 144
Introduction 144
Shift Register Operations 144

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 10 of 947

Characteristics 146
Library Primitives and Submodules 146
Initialization in VHDL and Verilog Code 149
Port Signals 149
Attributes 150
Location Constraints 150
Fully Synchronous Shift Registers 151
Static-Length Shift Registers 152
VHDL and Verilog Instantiation 153
Large Multiplexers 155
Introduction 155
Virtex-II Pro CLB Resources 155
Wide-Input Multiplexers 160
Characteristics 160
Library Primitives and Submodules 161
Port Signals 161
Applications 162
VHDL and Verilog Instantiation 162
Sum of Products (SOP) Logic 166
Introduction 166
Virtex-II Pro CLB Resources 166
VHDL Parameters 167
Applications 168
VHDL and Verilog Instantiation 168
Embedded Multipliers 172
Introduction 172
Two's-Complement Signed Multiplier 173
Library Primitives and Submodules 173
Two Multipliers in a Single Primitive 176
VHDL and Verilog Instantiation 177
Port Signals 178
Location Constraints 178
VHDL and Verilog Templates 178
Single-Ended SelectIO™-Ultra Resources 180
Summary 180
Introduction 180
Fundamentals 180
Overview of Supported I/O Standards 182
Library Symbols 183
Design Considerations 192
Application Examples 199
Digitally Controlled Impedance (DCI) 216
Introduction 216
Xilinx DCI 216
Software Support 223
DCI in Virtex-II Pro Hardware 228
Double-Data-Rate (DDR) I/O 232
Introduction 232
Data Flow 233
Characteristics 239
Library Primitives 239
VHDL and Verilog Instantiation 240

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 11 of 947

Port Signals . . . 240
Initialization in VHDL or Verilog . . . 241
Location Constraints . . . 241
Applications . . . 241
VHDL and Verilog Templates . . . 242
LVDS I/O . . . 248
Introduction . . . 248
Creating an LVDS Input/Clock Buffer . . . 249
Creating an LVDS Output Buffer . . . 251
Creating an LVDS Output 3-State Buffer . . . 252
Creating a Bidirectional LVDS Buffer . . . 254
LDT . . . 255
LDT Implementation . . . 255
LVPECL I/O . . . 256
Introduction . . . 256
Creating an LVPECL Input/Clock Buffer . . . 256
Creating an LVPECL Output Buffer . . . 257
Bitstream Encryption . . . 259
What DES Is . . . 259
How Triple DES is Different . . . 259
Classification and Export Considerations . . . 260
Creating Keys . . . 260
Loading Keys . . . 262
Loading Encrypted Bitstreams . . . 262
V_{BATT} . . . 262
CORE Generator System . . . 262
Introduction . . . 262
The CORE Generator System . . . 263
CORE Generator Design Flow . . . 264
Core Types . . . 265
Xilinx IP Solutions and the IP Center . . . 267
CORE Generator Summary . . . 269
Virtex-II Pro IP Cores Support . . . 270

Chapter 4: Configuration

Summary . . . 281
Introduction . . . 281
Configuration Modes . . . 282
Configuration Process and Flow . . . 283
Configuration Pins . . . 286
Mixed Voltage Environments . . . 288
Configuration Solutions . . . 289
System Advanced Configuration Environment (System ACE™) Series . . . 289
Configuration PROMs . . . 293
Flash PROMs With a CPLD Configuration Controller . . . 294
Embedded Solutions . . . 295
PROM and System ACE Selection Guide . . . 295
Software Support and Data Files . . . 297
iMPACT . . . 297
Programming Cables . . . 297
Boundary Scan Interconnect Testing for Virtex-II Pro Devices . . . 297

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 12 of 947

Master Serial Programming Mode . . . 298
Slave Serial Programming Mode . . . 299
Daisy-Chain Configuration . . . 299
Master SelectMAP Programming Mode . . . 301
DATA Pins (D[0:7]) . . . 301
RDWR_B . . . 301
CS_B . . . 301
CCLK . . . 302
Data Loading . . . 302
Slave SelectMAP Programming Mode . . . 305
DATA Pins (D[0:7]) . . . 305
RDWR_B . . . 306
CS_B . . . 306
BUSY . . . 306
CCLK . . . 306
JTAG/ Boundary Scan Programming Mode . . . 308
Introduction . . . 308
Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1149.1 . . . 309
Boundary-Scan Register . . . 312
Bit Sequence . . . 313
Using Boundary Scan in Virtex-II Pro Devices . . . 316
Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1532 . . . 323
Configuration Flows Using JTAG . . . 325
Configuration Details . . . 327
Readback . . . 337
Readback Verification and Capture . . . 337
Preparing for Readback in Design Entry . . . 337
Enabling Readback in the Software . . . 338
Readback When Using Boundary Scan . . . 339
Using ChipScope Pro . . . 341

Chapter 5: PCB Design Considerations

Summary . . . 343
Pinout Information . . . 343
Introduction . . . 343
Pin Definitions . . . 344
FG256 Fine-Pitch BGA Package . . . 346
Pinout Diagrams . . . 355
FG256 Fine-Pitch BGA Pinout Diagrams . . . 357
FG456 Fine-Pitch BGA Pinout Diagrams . . . 361
FG676 Fine-Pitch BGA Pinout Diagrams . . . 369
FF672 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 375
FF896 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 383
FF1152 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 389
FF1148 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 401
FF1517 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 407
FF1704 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 413
FF1696 Flip-Chip Fine-Pitch BGA Pinout Diagrams . . . 419
Package Specifications . . . 425
FG256 Fine-Pitch BGA Package (1.00 mm Pitch) . . . 426
FG456 Fine-Pitch BGA Package (1.00 mm Pitch) . . . 427

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 13 of 947

FG676 Fine-Pitch BGA Package Specifications (1.00mm pitch) 428
FF672 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 429
FF896 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 430
FF1152 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 431
FF1148 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 432
FF1517 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 433
FF1704 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 434
FF1696 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch) 435

Flip-Chip Packages 436
Advantages of Flip-Chip Technology 436

Thermal Data 436
Thermal Considerations 436
Thermal Management Options 438

Printed Circuit Board Considerations 439
Layout Considerations 439
V_{CC} Decoupling 439

Board Routability Guidelines 445
Board-Level BGA Routing Challenges 445
Board Routing Strategy 446

XPower 451

IBIS Models 451
Using IBIS Models 452
IBIS Generation 452
Advantages of IBIS 452
IBIS File Structure 452
IBIS I/V and dV/dt Curves 453
Ramp and dV/dt Curves 453
Xilinx IBIS Package Parasitic Modelling 454
IBIS Simulations 454
IBIS Simulators 455
Xilinx IBIS Advantages 456
ANSI/EIA IBIS Official Website 456

BSDL and Boundary Scan Models 456
BSDL Files 456

Appendix A: BitGen and PROMGen Switches and Options

Using BitGen 457
BitGen Syntax 458
BitGen Files 458
BitGen Options 459

Using PROMGen 465
PROMGen Syntax 466
PROMGen Files 466
PROMGen Options 467
Examples 470

Appendix B: XC18V00 Series PROMs

PROM Package Specifications 471
PC20-84 Specification 472
SO20 Specification 473

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 14 of 947

VQ44 Specification 474

XC18V00 Series In-System Programmable Configuration PROMs

Features 475
Description 475
Pinout and Pin Description 476
Pinout Diagrams 478
Xilinx FPGAs and Compatible PROMs 479
Capacity 480
In-System Programming 480
OE/RESET 480
External Programming 480
Reliability and Endurance 480
Design Security 480
IEEE 1149.1 Boundary-Scan (JTAG) 481
Instruction Register 481
Boundary Scan Register 481
Identification Registers 481
XC18V00 TAP Characteristics 482
TAP Timing 482
TAP AC Parameters 482
Connecting Configuration PROMs 483
Initiating FPGA Configuration 483
Selecting Configuration Modes 483
Master Serial Mode Summary 483
Cascading Configuration PROMs 483
Reset Activation 486
Standby Mode 486
5V Tolerant I/Os 486
Customer Control Bits 486
Absolute Maximum Ratings(1,2) 487
Recommended Operating Conditions 487
Quality and Reliability Characteristics 487
DC Characteristics Over Operating Conditions 488
AC Characteristics Over Operating Conditions for XC18V04 and XC18V02 . . 489
AC Characteristics Over Operating Conditions for XC18V01 and XC18V512 . 490
AC Characteristics Over Operating Conditions When Cascading for XC18V04 and XC18V02 491
AC Characteristics Over Operating Conditions When Cascading for XC18V01 and XC18V512 492
Ordering Information 493
Valid Ordering Combinations 493
Marking Information 493
Revision History 494

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 15 of 947

Glossary 497

Index 529

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 16/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 16 of 947

About This Guide

This document, the *Virtex-II Pro Platform FPGA User Guide*, describes the function and operation of Virtex-II Pro devices, and also includes information on FPGA configuration techniques and PCB design considerations. It comprises the following main sections:

Guide Contents

- Chapter 1, "Introduction to the Virtex-II Pro™ FPGA Family"
- Chapter 2, "Timing Models"
- Chapter 3, "Design Considerations"
- Chapter 4, "Configuration"
- Chapter 5, "PCB Design Considerations"
- Appendix A, "BitGen and PROMGen Switches and Options"
- Appendix B, "XC18V00 Series PROMs"

For Virtex-II Pro device specifications, refer to the Virtex-II Pro Data Sheet modules:

- Virtex-II Pro™ Platform FPGAs: Introduction and Overview (Module 1)
- Virtex-II Pro™ Platform FPGAs: Functional Description (Module 2)
- Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)
- Virtex-II Pro™ Platform FPGAs: Pinout Tables (Module 4)

The following documents offer in-depth technical design information about the RocketIO multi-gigabit transceiver and PowerPC 405 processor, which are not covered in this User Guide:

- RocketIO Transceiver User Guide
- PowerPC Processor Reference Guide
- PowerPC 405 Processor Block Reference Guide

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 17 of 947

Additional Resources

For additional information, go to http://support.xilinx.com. The following table lists some of the resources you can access from this website. You can also directly access these resources using the provided URLs.

Resource	Description/URL
Tutorials	Tutorials covering Xilinx design flows, from design entry to verification and debugging http://support.xilinx.com/support/techsup/tutorials/index.htm
Answer Browser	Database of Xilinx solution records http://support.xilinx.com/xlnx/xil_ans_browser.jsp
Application Notes	Descriptions of device-specific design techniques and approaches http://support.xilinx.com/apps/appsweb.htm
Data Sheets	Device-specific information on Xilinx device characteristics, including readback, boundary scan, configuration, length count, and debugging http://support.xilinx.com/xlnx/xweb/xil_publications_index.jsp
Problem Solvers	Interactive tools that allow you to troubleshoot your design issues http://support.xilinx.com/support/troubleshoot/psolvers.htm
Tech Tips	Latest news, design tips, and patch information for the Xilinx design environment http://www.support.xilinx.com/xlnx/xil_tt_home.jsp

Conventions

This document uses the following conventions. An example illustrates each convention.

Typographical

The following typographical conventions are used in this document:

Convention	Meaning or Use	Example
`Courier font`	Messages, prompts, and program files that the system displays	`speed grade: - 100`
`Courier bold`	Literal commands that you enter in a syntactical statement	**`ngdbuild`** *`design_name`*
Helvetica bold	Commands that you select from a menu	**File → Open**
	Keyboard shortcuts	**Ctrl+C**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 18/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 18 of 947

Convention	Meaning or Use	Example
Italic font	Variables in a syntax statement for which you must supply values. (In angle brackets.)	**ngdbuild** *<design_name>*
	References to other manuals	See the *Development System Reference Guide* for more information.
	Emphasis in text	If a wire is drawn so that it overlaps the pin of a symbol, the two nets are *not* connected.
Square brackets [ ]	An optional entry or parameter. However, in bus specifications, such as **bus[7:0]**, they are required.	**ngdbuild** [*option_name*] *design_name*
Braces { }	A list of items from which you must choose one or more	**lowpwr =**{**on**|**off**}
Vertical bar |	Separates items in a list of choices	**lowpwr =**{**on**|**off**}
Vertical ellipsis . . .	Repetitive material that has been omitted	IOB #1: Name = QOUT' IOB #2: Name = CLKIN' . . .
Horizontal ellipsis ...	Repetitive material that has been omitted	**allow block** *block_name loc1 loc2 ... locn;*

Online Document

The following conventions are used in this document:

Convention	Meaning or Use	Example
Blue text	Cross-reference link to a location in the current document	See the section "Additional Resources" for details. Refer to "Title Formats" in Chapter 1 for details.
Red text	Cross-reference link to a location in another document	See Figure 2-5 in the *Virtex-II Handbook.*
Blue, underlined text	Hyperlink to a website (URL)	Go to http://www.xilinx.com for the latest speed files.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 19/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 19 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 20 of 947

Chapter 1

Introduction to the Virtex-II Pro™ FPGA Family

The Next Logical Revolution

The Virtex-II Pro Platform FPGA solution is the most technically sophisticated silicon and software product development in the history of the programmable logic industry. The goal was to revolutionize system architecture "from the ground up." To achieve that objective, the best circuit engineers and system architects from IBM, Mindspeed, and Xilinx co-developed the world's most advanced Platform FPGA silicon product. Leading teams from top embedded systems companies worked together with Xilinx software teams to develop the systems software and IP solutions that enabled this new system architecture paradigm. The result is the first Platform FPGA solution capable of implementing high performance system-on-a-chip designs previously the exclusive domain of custom ASICs, yet with the flexibility and low development cost of programmable logic. The Virtex-II Pro family marks the first paradigm change from programmable logic to programmable systems, with profound implications for leading-edge system architectures in networking applications, deeply embedded systems, and digital signal processing systems. It allows custom user-defined system architectures to be synthesized, next-generation connectivity standards to be seamlessly bridged, and complex hardware and software systems to be co-developed rapidly with in-system debug at system speeds. Together, these capabilities usher in the next programmable logic revolution.

Built for Bandwidth

The Virtex-II Pro family consists of ten members, each with four to twenty-four RocketIO™ multi-gigabit transceivers based on the Mindspeed SkyRail™ technology. Each Xilinx RocketIO transceiver block contains a complete set of user-configurable supporting circuitry that address real-life, system-level challenges. These include standard 8B/10B encode/decode, programmable signal integrity adjustments for varying PCB trace lengths and materials, support for synchronization of multiple channels, and programmable support for channel control commands. In addition, the RocketIO blocks are the first FPGA-embedded transceivers to reach a baud rate of 3.125 Gbps. Four RocketIO transceivers, employing 16 PCB traces, can be used to support a full-duplex 10 Gbps channel by way of the RocketIO channel-bonding feature. This is equivalent to 256 traces of typical LVTTL buses, or 68 traces of a high-speed, source-synchronous parallel LVDS bus. It allows a PCB trace reduction of up to 16X over conventional parallel buses, resulting in significant reductions in PCB complexity and EMI system noise. The RocketIO technology fulfills higher bandwidth system requirements than currently possible, with cost savings coming from faster time-to-market, reduced printed circuit board (PCB) complexity, and lower component count.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 21 of 947

The Virtex-II Pro members also incorporate small yet powerful IBM® PowerPC™ processor cores. Each of the larger Virtex-II Pro devices incorporates one to four PowerPC 405 processor cores, each capable of more than 300 MHz clock frequency and 420 Dhrystone MIPS. While the processor cores occupy a small area of the die, they provide tremendous system flexibility where they are used. The PowerPC 405 cores are fully embedded within the FPGA fabric, where all processor nodes are controlled by the FPGA routing resources. This provides the utmost architectural capability, where complex applications may be efficiently divided between high-speed logic implementation and high-flexibility software implementations. For example, a packet processing application using only the FPGA logic today for high-speed packet routing may be augmented to include a slave high-performance processor for exception handling or in-system statistics monitoring. In contrast, using a separate processor externally requires hundreds of additional interface pins, which degrades system performance and significantly increases FPGA I/O requirements and overall board costs.

The Virtex-II Pro products are based on the most advanced FPGA fabric available: the Virtex-II architecture with IP-Immersion™ technology, which was developed to offer significant improvements in engineering productivity, silicon efficiency, and system flexibility. Unique features common in the Virtex-II Series—consisting of the Virtex-II and Virtex-II Pro families—include powerful SystemIO™ system connectivity solutions, digitally controlled impedance (DCI) technology, comprehensive clocking solutions, high-speed Active Interconnect™ routing architecture, and bitstream encryption. These features together constitute the most complete Platform FPGA solution available, optimized for high performance system-level applications. The upward compatibility of the Virtex Series of products ensures benefits in engineering productivity, performance, design longevity, and continuing cost reduction.

Legacy of Leadership

Each of the Virtex families of FPGAs has been the most successful programmable product family in its class, starting with the introduction of the original Virtex family in 1998. The Virtex and Virtex-E families were recognized by the industry as the highest technology products available when they were first introduced. The Virtex-II family, which again achieved technology leadership in density, performance, and features, ushered in the era of Platform FPGAs—programmable devices with the system-level capability and performance to implement systems functionality. The Virtex-II Pro family continues the tradition of technology leadership as the most sophisticated Platform FPGA yet, again breaking the technology barrier for the benefit of leading-edge system architects.

The Virtex-II Pro family is the first FPGA family to incorporate both serial transceiver technology and a hard processor core within a general-purpose FPGA device. This is significant for new high-bandwidth embedded processing applications such as packet processing, where both high device I/O bandwidth and high performance processor cores are needed together.

The Virtex-II Pro devices are the *industry's first FPGAs in a 0.13-micron process*. The IBM nine-layer metal, all-copper, low-k process technology is among the most advanced in the semiconductor industry. The combination of advanced Active Interconnect™ architecture and advanced process technology makes the Virtex-II Pro family the highest performance FPGA in the world.

The RocketIO multi-gigabit transceiver (MGT), based on industry-leading SkyRail™ technology, is the highest performance, most complete embedded serial transceiver available. It is user-configurable for up to 3.125 Gbps baud rate per channel, which is over twice the performance of other embedded transceivers at 1.25 Gbps. Each RocketIO

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 22 of 947

transceiver provides a complete set of common functionality available in standard SerDes transceivers. In contrast, "programmable ASSP" products with clock/data recovery (CDR) provide only the most basic transceiver capability.

The IBM PowerPC 405 processor core used in the Virtex-II Pro family is the highest performance embedded core available in FPGAs. The PowerPC architecture is used in many markets including communications, industrial control, test and measurement systems, and other performance-oriented markets. It is currently the most popular processor architecture in embedded applications.

Packets Everywhere

The Virtex-II Pro family provides a powerful new paradigm for network processing where low latency is required, such as storage area networks, wireless infrastructure, and voice-over-IP networks. The digital convergence phenomenon drives the need for packet routing based on type and priority. For example, live voice and video data packets require significantly lower latency than data file packets. New data networking applications must now handle higher bandwidth traffic as well as more complex types of prioritized packets. In many cases, Virtex-II Pro devices can offer higher overall performance than other solutions, including specialized network processors (NPs). Using the Virtex-II Pro architecture, the most common packets may be quickly read and routed using FPGA logic, without incurring the lengthy software run-time needed by NPs. The FPGA logic interrupts the PowerPC processor core only when processor instructions are needed for special packet types. For example, packets may be stored into a 16 KB dual-port memory area accessible by both the FPGA logic and the PowerPC 405 on-chip memory (OCM) port, allowing rapid change of control and packet disposition. By using the FPGA logic to process the most common packet types while the processor core handles the more specialized ones as a slave to the logic, the Virtex-II Pro architecture can provide higher overall performance than NPs, as well as more sophisticated processing capabilities than FPGA logic alone.

Bridge, Anyone?

Powerful protocol bridges for tying together disparate data stream formats are well-suited for the Virtex-II Pro solution. New interface standards and protocols include 3GIO, Infiniband, Gigabit Ethernet, XAUI/10 Gigabit Ethernet, RapidIO, and HyperTransport. These must interface seamlessly to one another, as well as to other standards such as PCI, Fibre Channel, POS Phy Level 4, Flexbus 4, and others. This presents a significant challenge to system developers because of changing standards, scarcity of off-the-shelf interface components, and the inflexibility of available solutions. System designers have had to assemble their own blend of FPGAs, discrete physical transceivers, and discrete communications processors to solve their complex system challenges. Even newer "programmable ASSPs" (application-specific standard products) with built-in serial transceivers fall short, because they frequently require companion FPGAs to supplement their logic capacity. The Virtex-II Pro solution, using the powerful Xilinx SystemIO™ capability to fully integrate silicon, software, and IP capabilities, provides the most flexible pre-engineered protocol bridge solutions available for fast time-to-market and low development cost.

Simplifying Complexity

The Virtex-II Pro solution offers a powerful paradigm for complex embedded systems found in signal processing, industrial control, image processing, networking,

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 23 of 947

communications, and aeronautic applications. For the first time, complex embedded systems traditionally involving sophisticated hardware and software may be developed concurrently, emulated in actual hardware at speed, debugged in-system, and re-architected for performance within weeks, rather than months or years. In addition, full systems can be remotely upgraded as easily as software-only upgrades are performed today, using Compact Flash, CDROM, Internet, wireless transmission, or other flexible means. Hardware design is simplified using powerful development software and a large soft IP library to assemble logic- and processor-based platforms. Software development may be started earlier using the actual device in preconfigured sample platforms, without waiting for the new system board to be developed. In many cases, higher density Virtex-II Pro components may be used for early system development, whereby extra resources (including additional PowerPC processor cores) may be used to easily emulate board-level components yet to be developed. This flexibility, obviously unavailable in custom ASICs or ASSPs, allows systems to be emulated at speed, rather than simulated using software simulators at 100 or 1000 times slower. In-system debugging is further enhanced by the Xilinx ChipScope Pro tool, which provides comprehensive logic analysis—from probing internal nodes to full bus analysis with bus protocol adherence checks using an external logic analyzer via the IEEE 1149.1 (JTAG) test access port. Using ChipScope Pro can result in orders of magnitude of improvement in engineering productivity.

Complex systems can be optimally repartitioned between FPGA logic and processor cores, allowing a continuum of possible trade-offs between the speed of logic and the flexibility of software code. For example, a first implementation of an echo cancellation algorithm might be all-software in compiled C code running on a PowerPC core, in order to allow the system software development to start. As the system is further optimized, part of the DSP algorithm could be retargeted using Matlab Simulink into FPGA logic to achieve a significantly faster but functionally identical system for production release. In another example, an encryption application might implement the Diffie-Hellman key exchange algorithm, whereby exponentiation and message management could be optimally partitioned into FPGA logic and an embedded processor, respectively. In this way, the programmable systems paradigm offers tremendous flexibility to allow system designers and architects to optimize the trade-offs in development time, system performance, and system costs.

It is significant that the embedded systems enabled by Virtex-II Pro solutions are "all-soft," in that both logic and software code are controlled by a soft data file. Because of this, the low cost of design maintenance and degree of design reuse is greatly enhanced. Whole system upgrades, including both hardware and software, can now be accomplished with one unified soft file using System ACE™ configuration solutions, offering the same low cost and ease of use as software-only upgrades.

Time Is Money

The Virtex-II Series, comprising both the Virtex-II and Virtex-II Pro families, offers significantly faster time-to-market and lower development costs than ASICs. Compared to a full-custom ASIC, the Virtex-II Pro solution eliminates the need for exhaustive verification during development, and allows hardware-software debug at system speeds rather than at slow software simulation speeds. In addition, the Virtex-II Pro features of signal integrity, pre-engineered clocking capabilities, and an abundance of soft IP cores, significantly reduce development time.

The Virtex-II Series offers significantly lower development costs than ASICs, due to lower tool costs, lower third-party IP costs, and absence of NRE costs. The Virtex-II Series also increases engineering productivity by accelerating hardware availability for software

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 24 of 947

development and increasing software debug speed. In addition, the availability of powerful development tools enables straightforward retargeting of other embedded processors into the PowerPC platform. Compared to other processor architectures, the PowerPC 405 core in most cases allows higher performance and more powerful capabilities, and thus can be used to accelerate preproduction of performance-sensitive applications.

Flexibility Is Money

The flexibility inherent in the Virtex-II Series allows system architects to fine-tune their architectural partitioning after the initial prototype is developed. That is, each subsystem function can be freely implemented as hardware only, software only, or any combination within the hardware-software continuum, depending on the trade-off between performance and complexity. For example, a wireless infrastructure system might initially implement a rake filter function in hardware, and then change to a firmware implementation as more software control is necessary during later development. This repartitioning would be impossible in custom ASICs without significant time and cost penalties.

The Virtex-II Series offers significantly more flexibility than fixed chip sets and ASSPs, allowing end user product differentiation and future-proofing. For a design requirement that can generally be met either by ASSPs or by Virtex-II Platform FPGAs, the initial design investment for an FPGA implementation may be higher. However, the advantages for Platform FPGA implementations include customizing of functionality, ease of design reuse, ability to fix design bugs, differentiation of user end products, and ownership and control of the entire system. These are important advantages in highly competitive markets where ASSPs have standing errata lists and unpredictable future availability. In contrast, properly developed Platform FPGA designs are soft designs that may be readily maintained and reused as needed. Therefore, FPGA methodologies can provide system manufacturers with greater competitive advantage in the short term, and greater ownership and control over their products in the long term.

Not Being Discrete

Many high-bandwidth systems today use large FPGAs together with discrete SerDes transceivers, discrete communications processors, or other discrete components. The Virtex-II Pro family can eliminate the need for many of these external components, enhancing time-to-market and performance, even providing system cost benefits in many cases. Multi-chip solutions using FPGAs typically require over a hundred I/O pins to interface to each discrete quad 3.125 Gbps SerDes transceiver or discrete microprocessor. The result is increased PCB complexity to accommodate the hundreds of traces, reduced system performance due to on-chip/off-chip connections, and higher overall system costs. In some cases, the increased FPGA pin-count requirement may force a higher-density FPGA to be used, again increasing the overall cost. In these cases, the Virtex-II Pro devices can integrate the discrete components to achieve faster system development, higher system performance, and lower costs.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 25 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 26 of 947

Chapter 2

Timing Models

Summary

The following topics are covered in this chapter:

- CLB / Slice Timing Models
- Block SelectRAM Timing Model
- Embedded Multiplier Timing Model
- IOB Timing Models
- Pin-to-Pin Timing Models
- Digital Clock Manager Timing Model
- Additional Timing Models in Other Publications: PPC405 Processor Block and RocketIO Transceiver

Introduction

Due to the large size and complexity of Virtex-II Pro FPGAs, understanding the timing associated with the various paths and functional elements has become a difficult and important problem. Although it is not necessary to understand the various timing parameters in order to implement most designs using Xilinx software, a thorough timing model can assist advanced users in analyzing critical paths or planning speed-sensitive designs.

The Timing Model chapter is broken up into sections consisting of three basic components:

- Functional Element Diagram - basic architectural schematic illustrating pins and connections.
- Timing Parameters - Virtex-II Pro Platform FPGA Data Sheet timing parameter definitions.
- Timing Diagram - illustrates functional element timing parameters relative to each other.

This chapter was written with the Xilinx Timing Analyzer software (TRCE) in mind. All pin names, parameter names, and paths are consistent with Post Route Timing and Pre-Route Static Timing reports. Use the models in this chapter in conjunction with both the Timing Analyzer software and the section on switching characteristics in the Virtex-II Pro Platform FPGA Data Sheet. Most of the timing parameters found in the section on switching characteristics are described in this chapter.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 27 of 947

CLB / Slice Timing Models

The three sections below describe all timing parameters reported in the Virtex-II Pro Data Sheet that are associated with slices and Configurable Logic Blocks (CLBs). The sections correspond to their respective (switching characteristics) sections in the data sheet:

- "General Slice Timing Model and Parameters" (CLB Switching Characteristics)
- "Slice Distributed RAM Timing Model and Parameters" (CLB Distributed RAM Switching Characteristics)
- "Slice SRL Timing Model and Parameters" (CLB SRL Switching Characteristics)

General Slice Timing Model and Parameters

Figure 2-1 illustrates the details of a Virtex-II Pro slice.

Note: Some elements of the Virtex-II Pro slice have been omitted for clarity. Only the elements relevant to the timing paths described in this section are shown.

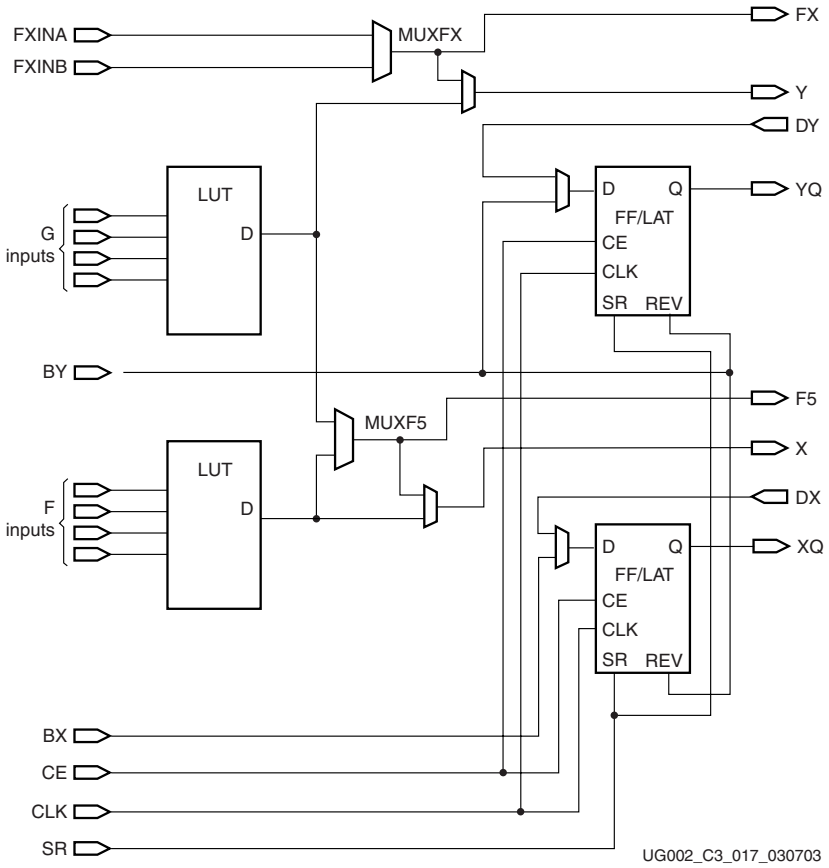


Figure 2-1: **Virtex-II Pro General Slice**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 28/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 28 of 947

Timing Parameters

Table 2-1: **General Slice Timing Parameters**

Parameter	Function	Control Signal	Description
Combinatorial Delays			
T_{ILO}	F/G inputs to X/Y outputs		Propagation delay from the F/G inputs of the slice, through the look-up tables (LUTs), to the X/Y outputs of the slice.
T_{IF5}	F/G inputs to F5 output		Propagation delay from the F/G inputs of the slice, through the LUTs and MUXF5 to the F5 output of the slice.
T_{IF5X}	F/G inputs to X output		Propagation delay from the F/G inputs of the slice, through the LUTs and MUXF5 to the X output of the slice.
T_{IFXY}	FXINA/FXINB inputs to Y output		Propagation delay from the FXINA/FXINB inputs, through MUXFX to the Y output of the slice.
T_{IFNCTL}	Transparent Latch input to XQ/YQ outputs		Incremental delay through a transparent latch to XQ/YQ outputs.
Sequential Delays			
T_{CKO}	FF Clock (CLK) to XQ/YQ outputs		Time after the clock that data is stable at the XQ/YQ outputs of the slice sequential elements (configured as a flip-flop).
T_{CKLO}	Latch Clock (CLK) to XQ/YQ outputs		Time after the clock that data is stable at the XQ/YQ outputs of the slice sequential elements (configured as a latch).
Setup and Hold for Slice Sequential Elements			
T_{xxCK} = Setup time (before clock edge) T_{CKxx} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{DICK}/T_{CKDI}	BX/BY inputs		Time before Clock (CLK) that data from the BX or BY inputs of the slice must be stable at the D-input of the slice sequential elements (configured as a flip-flop).
T_{DYCK}/T_{CKDY}	DY input		Time before Clock (CLK) that data from the DY input of the slice must be stable at the D-input of the slice sequential elements (configured as a flip-flop).
T_{DXCK}/T_{CKDX}	DX input		Time before Clock (CLK) that data from the DX input of the slice must be stable at the D-input of the slice sequential elements (configured as a flip-flop).
T_{CECK}/T_{CKCE}	CE input		Time before Clock (CLK) that the CE (Clock Enable) input of the slice must be stable at the CE-input of the slice sequential elements (configured as a flip-flop).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 29 of 947

Table 2-1: **General Slice Timing Parameters *(Continued)***

Parameter	Function	Control Signal	Description
T_{RCK}/T_{CKR}	SR/BY inputs		Time before CLK that the SR (Set/Reset) and the BY (Rev) inputs of the slice must be stable at the SR/Rev-inputs of the slice sequential elements (configured as a flip-flop). Synchronous set/reset only.
Clock CLK			
T_{CH}			Minimum Pulse Width, High.
T_{CL}			Minimum Pulse Width, Low.
Set/Reset			
T_{RPW}			Minimum Pulse Width for the SR (Set/Reset) and BY (Rev) pins.
T_{RQ}			Propagation delay for an asynchronous Set/Reset of the slice sequential elements. From SR/BY inputs to XQ/YQ outputs.
F_{TOG}			Toggle Frequency - Maximum Frequency that a CLB flip-flop can be clocked: $1/(T_{CH}+T_{CL})$

Timing Characteristics

Figure 2-2 illustrates general timing characteristics of a Virtex-II Pro slice.

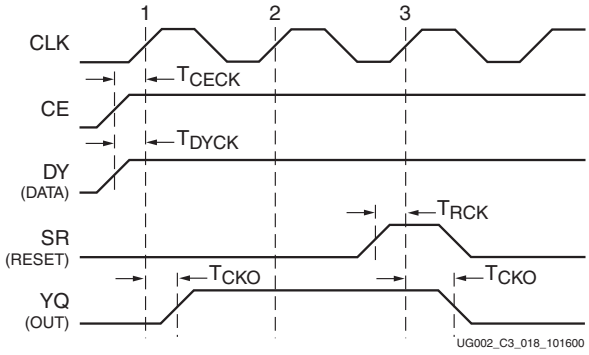


Figure 2-2: **General Slice Timing Characteristics**

- At time T_{CECK} before Clock Event 1, the Clock-Enable signal becomes valid-high at the CE input of the slice register.
- At time T_{DYCK} before Clock Event 1, data from the DY input becomes valid-high at the D input of the slice register and is reflected on the YQ pin at time T_{CKO} after Clock Event 1*.
- At time T_{RCK} before Clock Event 3, the SR signal (configured as synchronous reset in this case) becomes valid-high, resetting the slice register, and this is reflected on the YQ pin at time T_{CKO} after Clock Event 3.

  Note: In most cases software uses the DX/DY inputs to route data to the slice registers when at all possible. This is the fastest path to the slice registers and saves other slice routing resources.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 30/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 30 of 947

Slice Distributed RAM Timing Model and Parameters

Figure 2-3 illustrates the details of distributed RAM implemented in a Virtex-II Pro slice.

Note: Some elements of the Virtex-II Pro slice have been omitted for clarity. Only the elements relevant to the timing paths described in this section are shown.

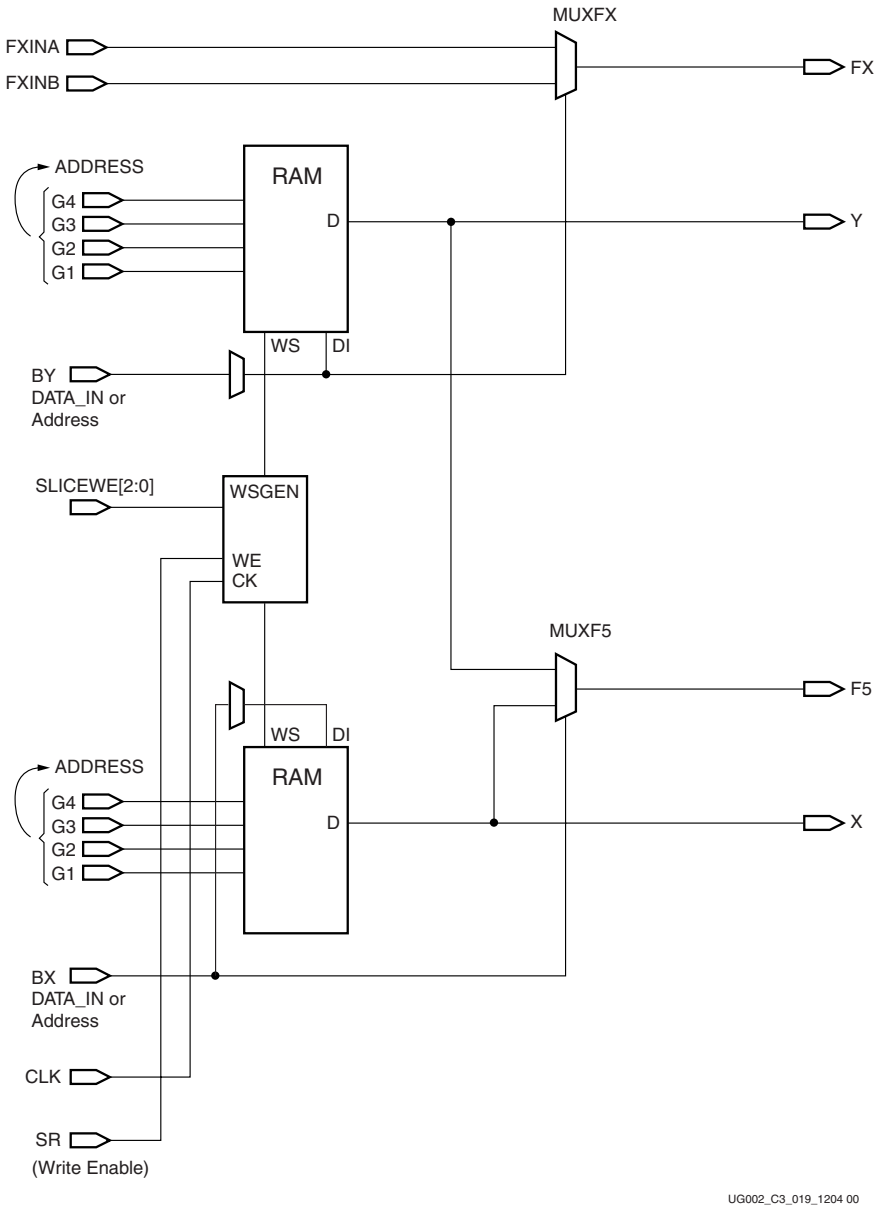


Figure 2-3: **Virtex-II Pro Slice Distributed RAM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 31/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 31 of 947

Timing Parameters

Table 2-2: **Slice Distributed RAM Timing Parameters**

Parameter	Function	Control Signal	Description
Sequential Delays for Slice LUT Configured as RAM (Distributed RAM)			
$T_{SHCKO16}$	CLK to X/Y outputs (WE active) in 16x1 mode		Time after the Clock (CLK) of a WRITE operation that the data written to the distributed RAM (in 16x1 mode) is stable on the X/Y outputs of the slice.
$T_{SHCKO32}$	CLK to X/Y outputs (WE active) in 32x1 mode		Time after the Clock (CLK) of a WRITE operation that the data written to the distributed RAM (in 32x1 mode) is stable on the X/Y outputs of the slice.
$T_{SHCKOF5}$	CLK to F5 output (WE active)		Time after the Clock (CLK) of a WRITE operation that the data written to the distributed RAM is stable on the F5 output of the slice.
Setup and Hold for Slice LUT Configured as RAM (Distributed RAM)			
T_{xS} = Setup time (before clock edge) T_{xH} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{DS}/T_{DH}	BX/BY Data inputs (DI)		Time before the clock that data must be stable at the DI input of the slice LUT (configured as RAM), via the slice BX/BY inputs.
T_{AS}/T_{AH}	F/G Address inputs		Time before the clock that address signals must be stable at the F/G inputs of the slice LUT (configured as RAM).
T_{WES}/T_{WEH}	WE input (SR)		Time before the clock that the Write Enable signal must be stable at the WE input of the slice LUT (configured as RAM).
Clock CLK			
T_{WPH}			Minimum Pulse Width, High (for a Distributed RAM clock).
T_{WPL}			Minimum Pulse Width, Low (for a Distributed RAM clock).
T_{WC}			Minimum clock period to meet address write cycle time.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 32 of 947

Timing Characteristics

Figure 2-4 illustrates the timing characteristics of a 16-bit distributed RAM implemented in a Virtex-II Pro slice (LUT configured as RAM).

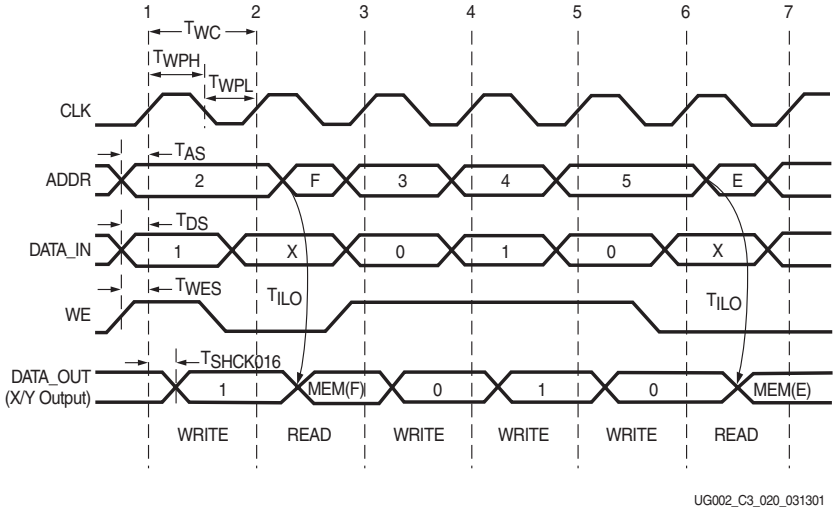


Figure 2-4: **Slice Distributed RAM Timing Characteristics**

Clock Event 1: WRITE Operation

During a WRITE operation, the contents of the memory at the address on the ADDR inputs is changed. The data written to this memory location is reflected on the X/Y outputs synchronously.

- At time T_{WES} before Clock Event 1, the Write Enable signal (WE) becomes valid-high, enabling the RAM for the following WRITE operation.
- At time T_{AS} before Clock Event 1, the address (2) becomes valid at the F/G inputs of the RAM.
- At time T_{DS} before Clock Event 1, the DATA becomes valid (1) at the DI input of the RAM and is reflected on the X/Y output at time $T_{SHCKO16}$ after Clock Event 1.

Clock Event 2: READ Operation

All READ operations are asynchronous in distributed RAM. As long as write-enable (WE) is Low, the address bus can be asserted at any time, and the contents of the RAM at that address are reflected on the X/Y outputs after a delay of length T_{ILO} (propagation delay through a LUT). Note that the Address (F) is asserted *after* Clock Event 2, and that the contents of the RAM at that location are reflected on the output after a delay of length T_{ILO}.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 33/94
Ex. 1012
CISCO SYSTEMS, INC. / Page 33 of 947

Slice SRL Timing Model and Parameters

Figure 2-5 illustrates shift register implementation in a Virtex-II Pro slice.

Note: Note: Some elements of the Virtex-II Pro slice have been omitted for clarity. Only the elements relevant to the timing paths described in this section are shown.

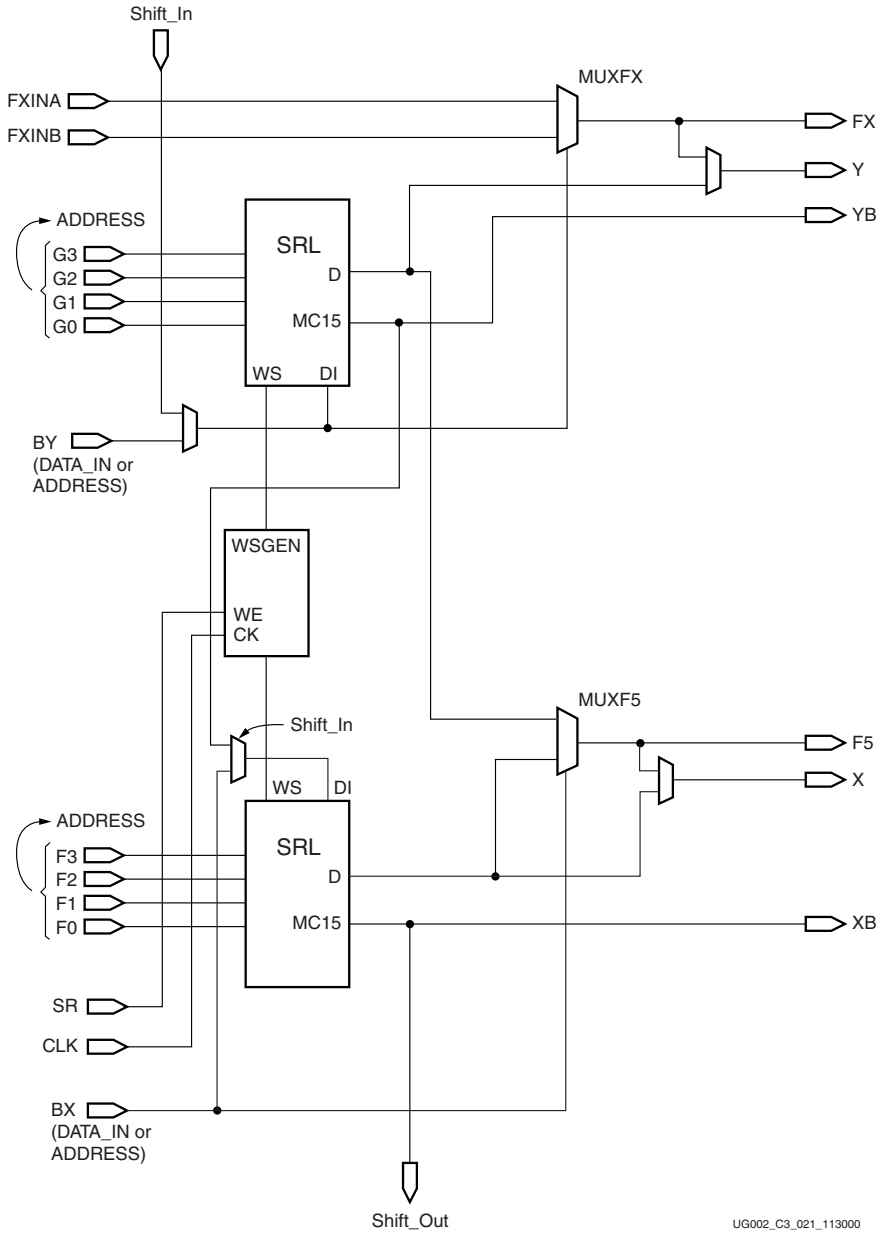


Figure 2-5: **Virtex-II Pro Slice SLR**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 34/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 34 of 947

Timing Parameters

Table 2-3: **Slice SRL Timing Parameters**

Parameter	Function	Control Signal	Description
Sequential Delays for Slice LUT Configured as SRL (Select Shift Register)			
T_{REG}	CLK to X/Y outputs		Time after the Clock (CLK) of a WRITE operation that the data written to the SRL is stable on the X/Y outputs of the slice.
T_{CKSH}	CLK to Shiftout		Time after the Clock (CLK) of a WRITE operation that the data written to the SRL is stable on the Shiftout or XB/YB outputs of the slice.
T_{REGF5}	CLK to F5 output		Time after the Clock (CLK) of a WRITE operation that the data written to the SRL is stable on the F5 output of the slice.
Setup/Hold for Slice LUT Configured as SRL (Select Shift Register)			
T_{xxS} = Setup time (before clock edge) T_{xxH}= Hold time (after clock edge)			The following descriptions are for setup times only.
T_{SRLDS}/ T_{SRLDH}	BX/BY Data inputs (DI)		Time before the clock that data must be stable at the DI input of the slice LUT (configured as SRL), via the slice BX/BY inputs.
T_{WSS}/T_{WSH}	CE input (WE)		Time before the clock that the Write Enable signal must be stable at the WE input of the slice LUT (configured as SRL).
Clock CLK			
T_{SRPH}			Minimum Pulse Width, High (for SRL clock).
T_{SRPL}			Minimum Pulse Width, Low (for SRL clock).

Timing Characteristics

Figure 2-6 illustrates the timing characteristics of a 16-bit shift register implemented in a Virtex-II Pro slice (LUT configured as SRL).

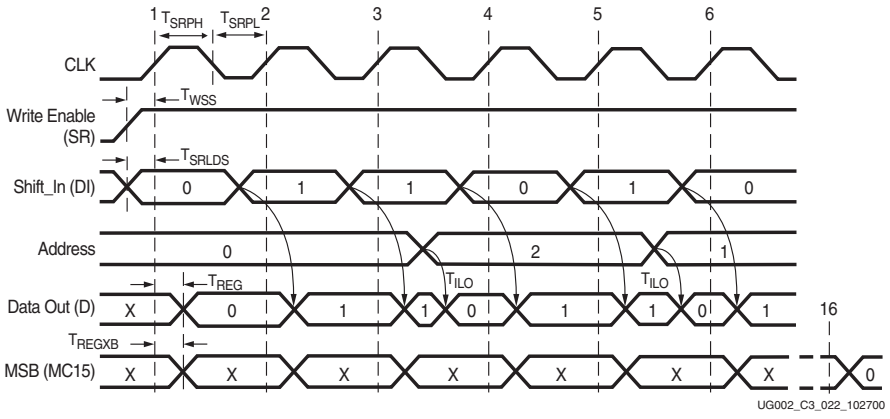


Figure 2-6: **Slice SLR Timing Characteristics**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 35/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 35 of 947

Clock Event 1: Shift_In

During a WRITE (Shift_In) operation, the single-bit content of the register at the address on the ADDR inputs is changed, as data is shifted through the SRL. The data written to this register is reflected on the X/Y outputs synchronously, if the address is unchanged during the clock event. If the ADDR inputs are changed during a clock event, the value of the data at the addressable output (D) is invalid.

- At time T_{WSS} before Clock Event 1, the Write Enable signal (SR) becomes valid-high, enabling the SRL for the WRITE operation that follows.
- At time T_{SRLDS} before Clock Event 1 the data becomes valid (0) at the DI input of the SRL and is reflected on the X/Y output after a delay of length T_{REG} after Clock Event 1*.

  Note: Since the address 0 is specified at Clock Event 1, the data on the DI input is reflected at the D output, because it is written to Register 0.

Clock Event 2: Shift_In

- At time T_{SRLDS} before Clock Event 2, the data becomes valid (1) at the DI input of the SRL and is reflected on the X/Y output after a delay of length T_{REG} after Clock Event 2*.

  Note: Since the address 0 is still specified at Clock Event 2, the data on the DI input is reflected at the D output, because it is written to Register 0.

Clock Event 3: Shift_In / Addressable (Asynchronous) READ

All READ operations are asynchronous. If the address is changed (between clock events), the contents of the register at that address are reflected at the addressable output (X/Y outputs) after a delay of length T_{ILO} (propagation delay through a LUT).

- At time T_{SRLDS} before Clock Event 3 the Data becomes valid (1) at the DI input of the SRL, and is reflected on the X/Y output T_{REG} time after Clock Event 3.
- Notice that the address is changed (from 0 to 2) some time after Clock Event 3. The value stored in Register 2 at this time is a 0 (in this example, this was the first data shifted in), and it is reflected on the X/Y output after a delay of length T_{ILO}.

Clock Event 16: MSB (Most Significant Bit) Changes

- At time T_{REGXB} after Clock Event 16, the first bit shifted into the SRL becomes valid (logical 0 in this case) on the XB output of the slice via the MC15 output of the LUT (SRL).

Block SelectRAM Timing Model

Introduction

This section describes the timing parameters associated with the block SelectRAM (illustrated in Figure 2-7) in Virtex-II Pro FPGA devices. This section is intended to be used with the section on switching characteristics in the Virtex-II Pro Platform FPGA Data Sheet and the Timing Analyzer (TRCE) report from Xilinx software. For specific timing parameter values, refer to the switching characteristics section in the Virtex-II Pro Platform FPGA Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 36 of 947

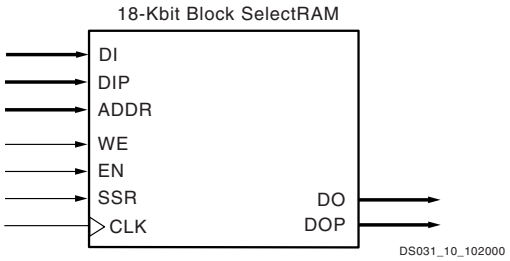


Figure 2-7: **Block SelectRAM Block Diagram**

Timing Parameters

Table 2-4: **Block SelectRAM Timing Parameters**

Parameter	Function	Control Signal	Description
Setup and Hold Relative to Clock (CLK)			
T_{BxCK} = Setup time (before clock edge) T_{BCKx} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{BACK}/T_{BCKA}	Address inputs	ADDR	Time before the clock that address signals must be stable at the ADDR inputs of the block RAM.
T_{BDCK}/T_{BCKD}	Data inputs	DI	Time before the clock that data must be stable at the DI inputs of the block RAM.
T_{BECK}/T_{BCKE}	Enable	EN	Time before the clock that the enable signal must be stable at the EN input of the block RAM.
T_{BRCK}/T_{BCKR}	Synchronous Set/Reset	SSR	Time before the clock that the synchronous set/reset signal must be stable at the SSR input of the block RAM.
T_{BWCK}/T_{BCKW}	Write Enable	WE	Time before the clock that the write enable signal must be stable at the WE input of the block RAM.
Clock to Out			
T_{BCKO}	Clock to Output	CLK to DO	Time after the clock that the output data is stable at the DO outputs of the block RAM.
Clock			
T_{BPWH}	Clock	CLK	Minimum pulse width, high.
T_{BPWL}	Clock	CLK	Minimum pulse width, low.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 37/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 37 of 947

Timing Characteristics

The timing diagram in Figure 2-8 describes a single-port block RAM in Write-First mode. The timing for Read-First and No-Change modes are similar (see Chapter 3, "Design Considerations").

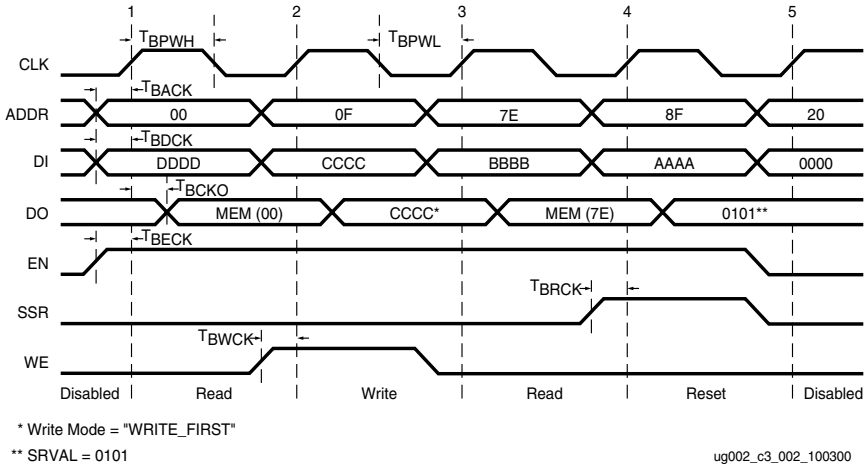


Figure 2-8: **Block SelectRAM Timing Characteristics**

At time 0, the block RAM is disabled; EN (enable) is low.

Clock Event 1: READ Operation

During a read operation, the contents of the memory at the address on the ADDR inputs are unchanged.

- T_{BACK} before Clock Event 1, address 00 becomes valid at the ADDR inputs of the block RAM.
- At time T_{BECK} before Clock Event 1, Enable goes High at the EN input of the block RAM, enabling the memory for the READ operation that follows.
- At time T_{BCKO} after Clock Event 1, the contents of the memory at address 00 become stable at the DO pins of the block RAM.

Clock Event 2: WRITE Operation

During a write operation, the content of the memory at the location specified by the address on the ADDR inputs is replaced by the value on the DI pins and is immediately reflected on the output latches (in WRITE-FIRST mode); EN (enable) is high.

- At time T_{BACK} before Clock Event 2, address 0F becomes valid at the ADDR inputs of the block RAM.
- At time T_{BDCK} before Clock Event 2, data CCCC becomes valid at the DI inputs of the block RAM.
- At time T_{BWCK} before Clock Event 2, Write Enable becomes valid at the WE following the block RAM.
- At time T_{BCKO} after Clock Event 2, data CCCC becomes valid at the DO outputs of the block RAM.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 38/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 38 of 947

Clock Event 4: SSR (Synchronous Set/Reset) Operation

During an SSR operation, initialization parameter value SRVAL is loaded into the output latches of the block SelectRAM. The SSR operation does NOT change the contents of the memory and is independent of the ADDR and DI inputs.

- At time T_{BRCK} before Clock Event 4, the synchronous set/reset signal becomes valid (High) at the SSR input of the block RAM.
- At time T_{BCKO} after Clock Event 4, the SRVAL 0101 becomes valid at the DO outputs of the block RAM.

Clock Event 5 Disable Operation

De-asserting the enable signal EN disables any write, read or SSR operation. The disable operation does NOT change the contents of the memory or the values of the output latches.

- At time T_{BECK} before Clock Event 5, the enable signal becomes valid (Low) at the EN input of the block RAM.
- After Clock Event 5, the data on the DO outputs of the block RAM is unchanged.

Timing Model

Figure 2-9 illustrates the delay paths associated with the implementation of block SelectRAM. This example takes the simplest paths on and off chip (these paths can vary greatly depending on the design). This timing model demonstrates how and where the block SelectRAM timing parameters are used.

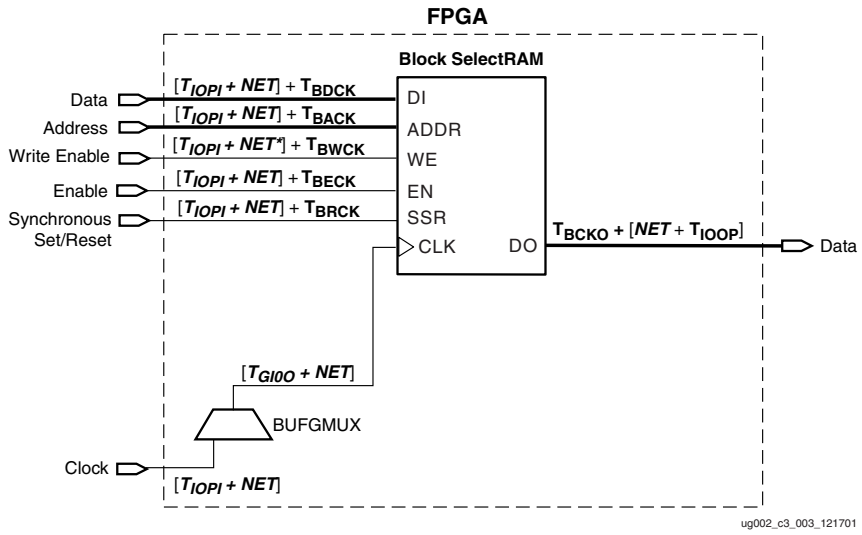


Figure 2-9: **Block SelectRAM Timing Model**

NET = Varying interconnect delays

$\mathbf{T_{IOPI}}$ = Pad to I-output of IOB delay

$\mathbf{T_{IOOP}}$ = O-input of IOB to pad delay

$\mathbf{T_{GI0O}}$ = BUFGMUX delay

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 39/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 39 of 947

Embedded Multiplier Timing Model

Introduction

This section explains all timing parameters associated with the use of embedded 18-bit x 18-bit multipliers in Virtex-II Pro FPGAs (see Figure 2-10). The propagation delays through the embedded multiplier differ based on the size of the multiplier function implemented. The longest delay through the multiplier is to the highest order bit output (P35). Therefore, if an 18-bit x 18-bit signed multiplier is implemented, the worst-case delay for this function is the longest delay associated with the embedded multiplier block. If smaller (LSB) multipliers are used, shorter delays can be realized.

This section is intended to be used in conjunction with the section on switching characteristics in the Virtex-II Pro Platform FPGA Data Sheet and the Timing Analyzer (TRCE) report from Xilinx software. For specific timing parameter values, refer to the Virtex-II Pro Platform FPGA Data Sheet.

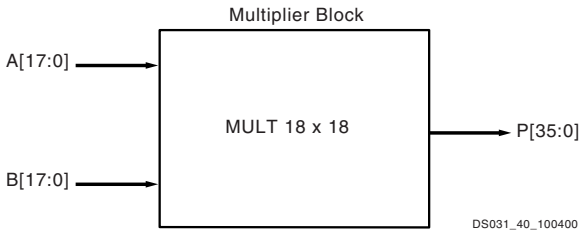


Figure 2-10: **Embedded 18-bit x 18-bit Multiplier Block**

Timing Parameters

Worst-Case Propagation Delays

The T_{MULT} timing parameter is reported by the Timing Analyzer software. These values correspond to the propagation delay through the multiplier to a specific output pin of the multiplier block. The shortest delay is to pin 0, the longest to pin 35. These parameters can be found in the table entitled "Multiplier Switching Characteristics" in Module 3 of the Virtex-II Pro Platform FPGA Data Sheet. The delay-to-pin ratio is essentially linear (see Figure 2-11). This implies that smaller multiply functions are faster than larger ones. This is true as long as the LSB inputs are used.

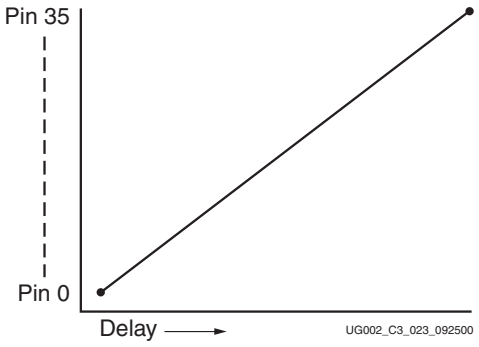


Figure 2-11: **Pin-to-Delay Ratio Curve**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 40 of 947

Timing Characteristics

Figure 2-12 illustrates the result (outputs) of a 4-bit x 4-bit unsigned multiply implemented in an embedded multiplier block.

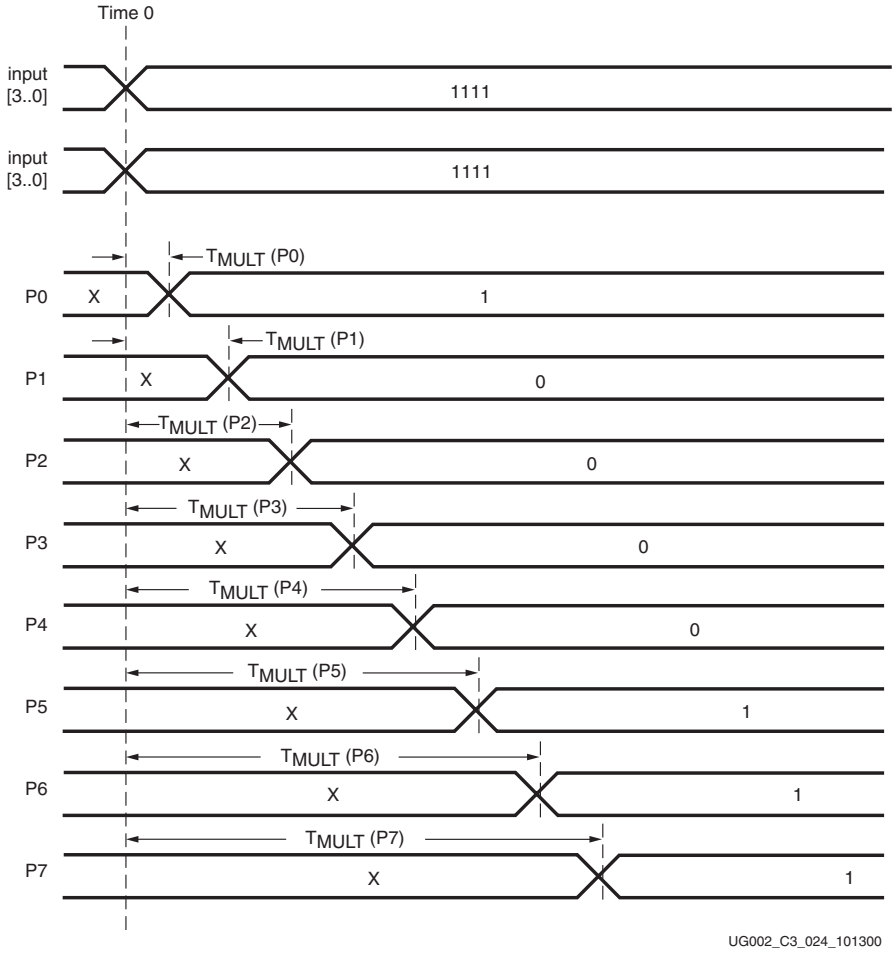


Figure 2-12: **Embedded Multiplier Block Timing Diagram**

At time 0 the two 4-bit numbers to be multiplied become valid at the A[0..3], B[0..3] inputs to the embedded multiplier. The result appears on the output pins P[0..7] in a staggered fashion. First, P0 becomes valid at time T_{MULT}(P0), followed by each subsequent output pin, until P7 becomes valid at time T_{MULT} (P7). In this case, the delay for this multiply function should correspond to that of Pin 7. In other words, the result is not valid until all output pins become valid.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 41/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 41 of 947

IOB Timing Models

The following three sections describe all timing parameters associated with the Virtex-II Pro IOB. These three sections are:

- "IOB Input Timing Model and Parameters"
- "IOB Output Timing Model and Parameters"
- "IOB 3-State Timing Model and Parameters"

These sections are intended to be used in conjunction with the section on switching characteristics in the Virtex-II Pro Platform FPGA Data Sheet and the Timing Analyzer (TRCE) report from Xilinx software. For specific timing parameter values, refer to the Virtex-II Pro Platform FPGA Data Sheet.

A Note on I/O Standard Adjustments:

The "IOB Input and Output Switching Characteristics Standard Adjustments" tables in Module 3 of the Virtex-II Pro Platform FPGA Data Sheet are delay adders (+/-) to be added to all timing parameter values associated with the IOB and the Global Clock (see "Pin-to-Pin Timing Models," page 50), if an I/O standard other than LVCMOS_25 12 mA is used.

All values specified in the Virtex-II Pro Platform FPGA Data Sheet for the parameters covered in this section are specified for LVCMOS_25 12 mA. If another I/O standard is used, these delays change. However, there are several exceptions. The following parameters associated with the pad going to high-impedance (3-State buffer OFF) should NOT be adjusted:

- T_{IOTHZ}
- $T_{IOTLPHZ}$
- T_{GTS}
- T_{IOCKHZ}
- T_{IOSRHZ}

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 42 of 947

IOB Input Timing Model and Parameters

Figure 2-13 illustrates IOB inputs.

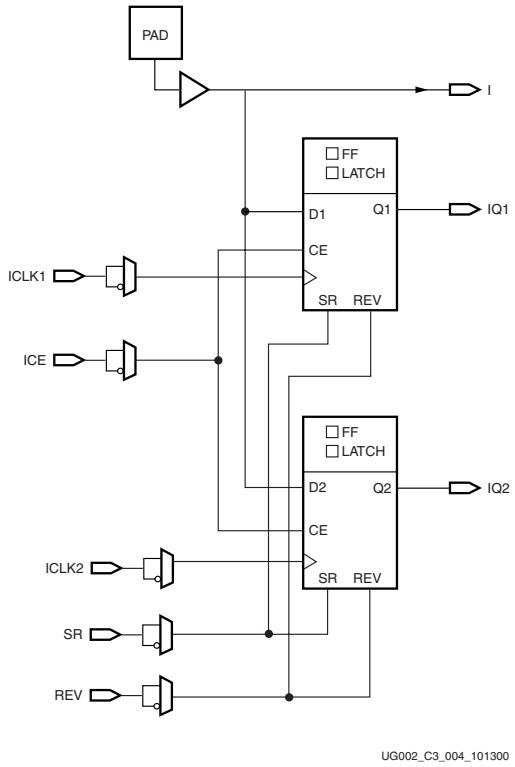


Figure 2-13: **Virtex-II Pro IOB Inputs**

Timing Parameters

Table 2-5: **IOB Input Timing Parameters**

Parameter	Function	Control Signal	Description
Propagation Delays			
T_{IOPI}			Propagation delay from the pad to I output of the IOB with no delay adder.
T_{IOPID}			Propagation delay from the pad to I output of the IOB with the delay adder.
T_{IOPLI}			Propagation delay from the pad to IQ output of the IOB via transparent latch with no delay adder.
T_{IOPLID}			Propagation delay from the pad to IQ output of the IOB via transparent latch with the delay adder.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 43/94
Ex. 1012
CISCO SYSTEMS, INC. / Page 43 of 947

Table 2-5: **IOB Input Timing Parameters**

Parameter	Function	Control Signal	Description
Setup and Hold With Respect to Clock at IOB Input Register			
T_{xxCK} = Setup time (before clock edge) T_{xxCKxx} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{IOPICK}/T_{IOICKP}	ID input with NO delay		Time before the clock that the input signal from the pad must be stable at the ID input of the IOB Input Register, with no delay.
$T_{IOPICKD}/T_{IOICKPD}$	ID input with delay		Time before the clock that the input signal from the pad must be stable at the ID input of the IOB Input Register, with delay.
$T_{IOICECK}/T_{IOCKICE}$	ICE input		Time before the clock that the Clock Enable signal must be stable at the ICE input of the IOB Input Register.
$T_{IOSRCKI}$	SR input (IFF, synchronous)		Time before the clock that the Set/Reset signal must be stable at the SR input of the IOB Input Register.
Clock to Out			
T_{IOCKIQ}	Clock (CLK) to (IQ) output		Time after the clock that the output data is stable at the IQ output of the IOB Input Register.
Set/Reset Delays			
T_{IOSRIQ}	SR Input to IQ (asynchronous)		Time after the Set/Reset signal of the IOB is toggled that the output of the IOB input register (IQ) reflects the signal.
T_{GSRQ}	GSR to output IQ		Time after the Global Set/Reset is toggled that the output of the IOB input register (IQ) reflects the set or reset.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 44 of 947

Timing Characteristics

Figure 2-14 illustrates IOB input register timing.

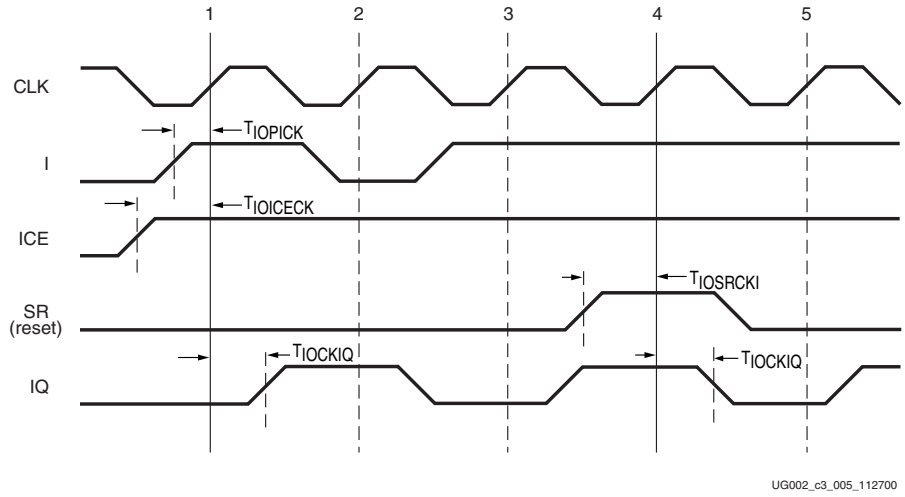


Figure 2-14: **IOB Input Register Timing Characteristics**

Clock Event 1

- At time $T_{IOICECK}$ before Clock Event 1, the input clock enable signal becomes valid-high at the ICE input of the input register, enabling the input register for incoming data.
- At time T_{IOPICK} before Clock Event 1, the input signal becomes valid-high at the I input of the input register and is reflected on the IQ output of the input register at time T_{IOCKIQ} after Clock Event 1.

Clock Event 4

- At time $T_{IOSRCKI}$ before Clock Event 4, the SR signal (configured as synchronous reset in this case) becomes valid-high resetting the input register and reflected at the IQ output of the IOB at time T_{IOCKIQ} after Clock Event 4.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 45/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 45 of 947

Timing Characteristics, DDR

Figure 2-15 illustrates IOB DDR input register timing.

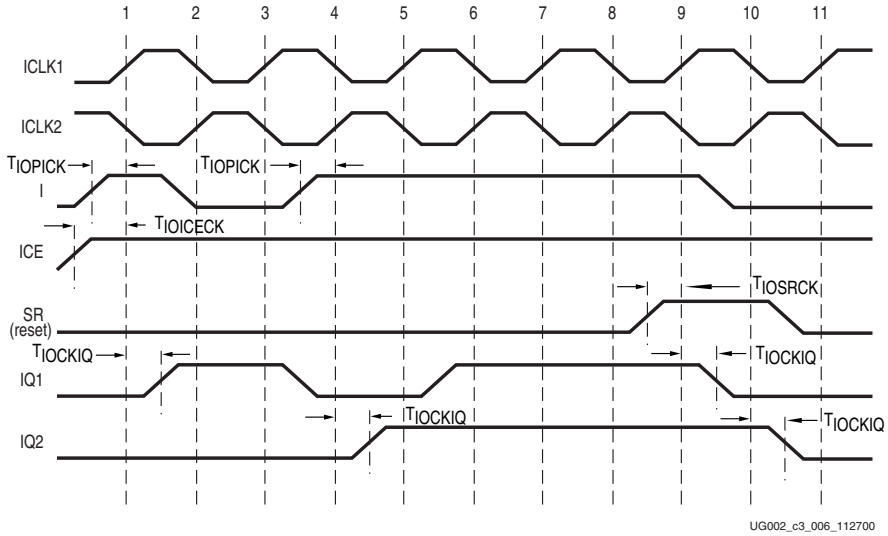


Figure 2-15: **IOB DDR Input Register Timing Characteristics**

Clock Event 1

- At time $T_{IOICECK}$ before Clock Event 1 the input clock enable signal becomes valid-high at the ICE input of both of the DDR input registers, enabling them for incoming data. Since the ICE and I signals are common to both DDR registers, care must be taken to toggle these signals between the rising edges of ICLK1 and ICLK2 as well as meeting the register setup-time relative to both clocks.
- At time T_{IOPICK} before Clock Event 1 (rising edge of ICLK1) the input signal becomes valid-high at the I input of both registers and is reflected on the IQ1 output of input-register 1 at time T_{IOCKIQ} after Clock Event 1.

Clock Event 2

At time T_{IOPICK} before Clock Event 2 (rising edge of ICLK2) the input signal becomes valid-low at the I input of both registers and is reflected on the IQ2 output of input-register 2 at time T_{IOCKIQ} after Clock Event 2 (no change in this case).

Clock Event 9

At time $T_{IOSRCKI}$ before Clock Event 9 the SR signal (configured as synchronous reset in this case) becomes valid-high resetting input-register 1 (IQ1) at time T_{IOCKIQ} after Clock Event 9, and input-register 2 (IQ2) at time T_{IOCKIQ} after Clock Event 10.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 46 of 947

IOB Output Timing Model and Parameters

Figure 2-16 illustrates IOB outputs.

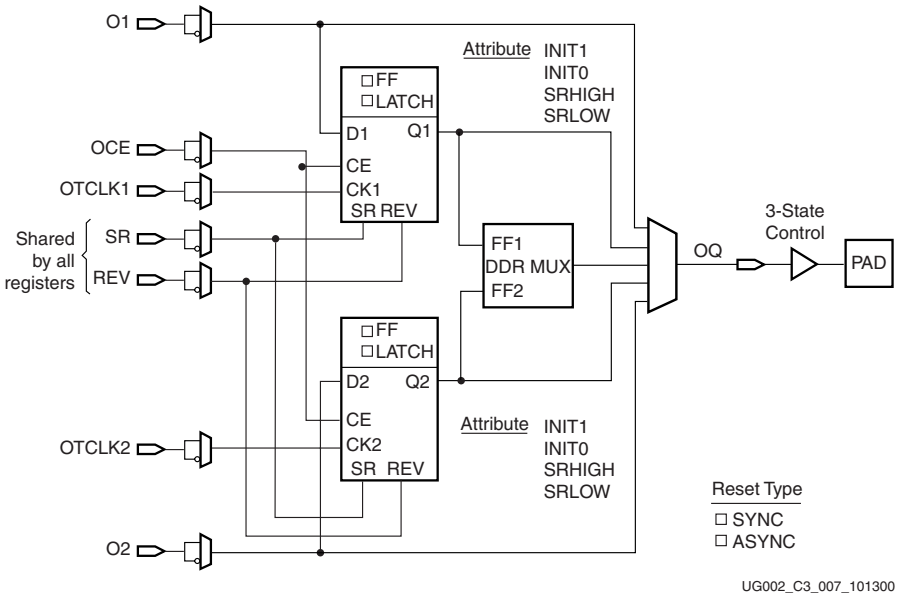


Figure 2-16: **Virtex-II Pro IOB Output**

Timing Parameters

Table 2-6: **IOB Output Timing Parameters**

Parameter	Function	Control Signal	Description
Propagation Delays			
T_{IOOP}			Propagation delay from the O input of the IOB to the pad.
T_{IOOLP}			Propagation delay from the O input of the IOB to the pad via transparent latch.
Setup and Hold With Respect to Clock at IOB Output Register			
T_{xxCK} = Setup time (before clock edge) T_{xxCKxx} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{IOOCK}/T_{IOCKO}	O input		Time before the clock that data must be stable at the O input of the IOB Output Register.
$T_{IOOCECK}/T_{IOCKOCE}$	OCE input		Time before the clock that the Clock Enable signal must be stable at the OCE input of the IOB Output Register.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 47/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 47 of 947

Table 2-6: **IOB Output Timing Parameters**

Parameter	Function	Control Signal	Description
$T_{IOSRCKO}/T_{IOCKOSR}$	SR input (OFF)		Time before the clock that the Set/Reset signal must be stable at the SR input of the IOB Output Register.
Clock to Out			
T_{IOCKP}	Clock (CLK) to pad		Time after the clock that the output data is stable at the pad.
Set/Reset Delays			
T_{IOSRP}	SR Input to pad (asynchronous)		Time after the Set/Reset input of the IOB is toggled that the pad reflects the set or reset.
T_{IOGSRQ}	GSR to pad		Time after the Global Set/Reset is toggled that the pad reflects the set or reset.

Timing Characteristics

Figure 2-17 illustrates IOB output register timing.

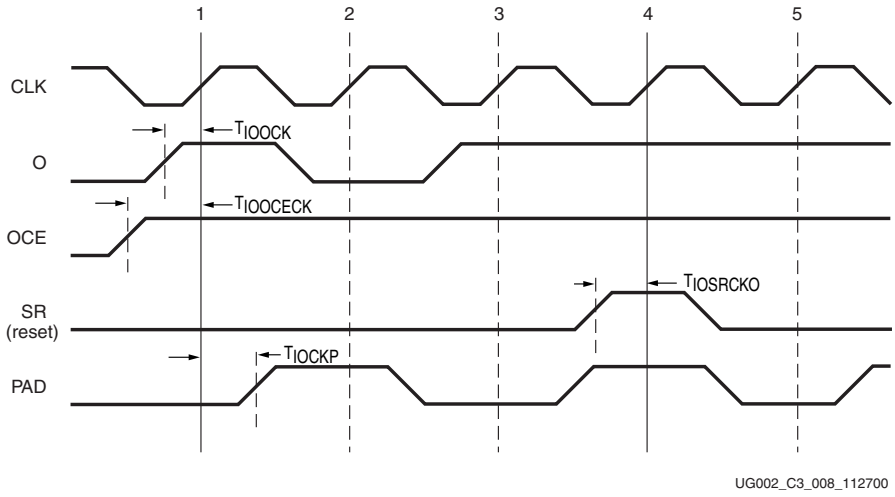


Figure 2-17: **IOB Output Register Timing Characteristics**

Clock Event 1

- At time $T_{IOOCECK}$ before Clock Event 1, the output clock enable signal becomes valid-high at the OCE input of the output register, enabling the output register for incoming data.
- At time T_{IOOCK} before Clock Event 1, the output signal becomes valid-high at the O input of the output register and is reflected on the pad at time T_{IOCKP} after Clock Event 1.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 48/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 48 of 947

Clock Event 4

At time $T_{IOSRCKO}$ before Clock Event 4, the SR signal (configured as synchronous reset in this case) becomes valid-high, resetting the output register and reflected on the pad at time T_{IOCKP} after Clock Event 4.

Timing Characteristics, DDR

Figure 2-18 illustrates IOB DDR output register timing.

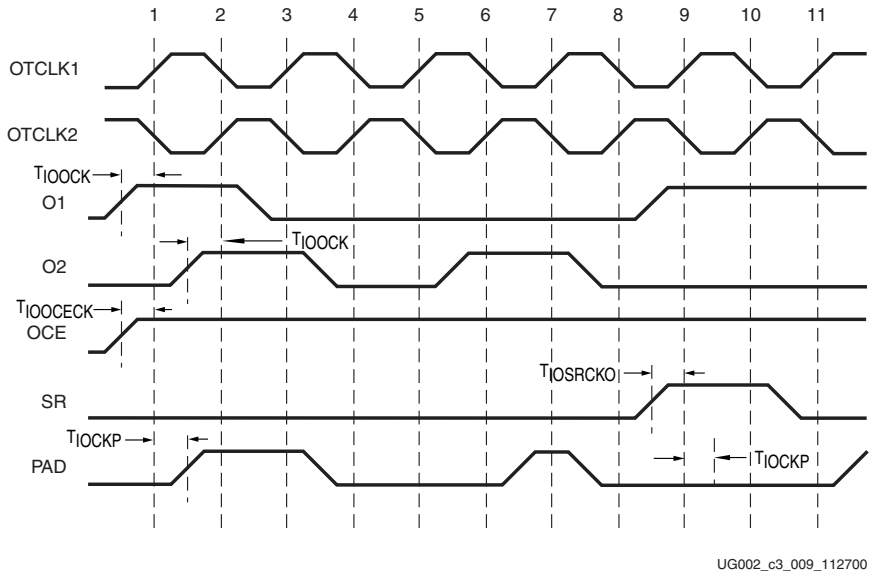


Figure 2-18: **IOB DDR Output Register Timing Characteristics**

Clock Event 1

- At time $T_{IOOCECK}$ before Clock Event 1, the output clock enable signal becomes valid-high at the OCE input of both of the DDR output registers, enabling them for incoming data. Since the OCE signal is common to both DDR registers, care must be taken to toggle this signal between the rising edges of OTCLK1 and OTCLK2 as well as meeting the register setup-time relative to both clocks.
- At time T_{IOOCK} before Clock Event 1 (rising edge of OTCLK1), the output signal O1 becomes valid-high at the O1 input of output register 1 and is reflected on the pad at time T_{IOCKP} after Clock Event 1.

Clock Event 2*

At time T_{IOOCK} before Clock Event 2 (rising edge of OTCLK2), the output signal O2 becomes valid-high at the O2 input of output register 2 and is reflected on the pad at time T_{IOCKP} after Clock Event 2 (no change on the pad in this case).

Clock Event 9

At time $T_{IOSRCKO}$ before Clock Event 9, the SR signal (configured as synchronous reset in this case) becomes valid-high, resetting output-register 1 (reflected on the pad at time

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 49/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 49 of 947

T_{IOCKP} after Clock Event 9) (no change in this case) and output-register 2 (reflected on the pad at time T_{IOCKP} after Clock Event 10) (no change in this case).

IOB 3-State Timing Model and Parameters

Figure 2-19 illustrates IOB 3-state timing

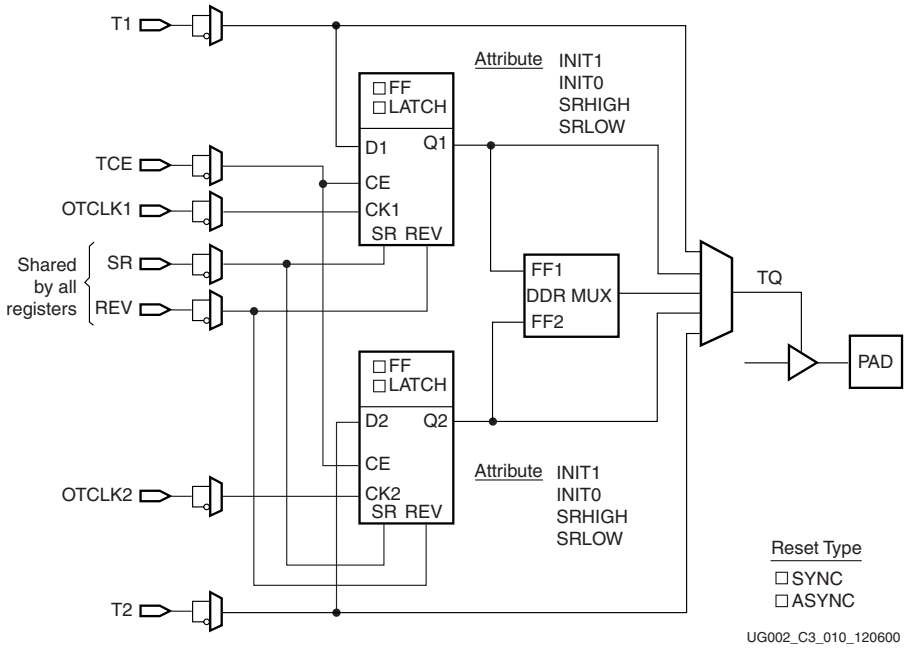


Figure 2-19: **Virtex-II Pro IOB 3-State**

Timing Parameters

Table 2-7: **IOB 3-State Timing Parameters**

Parameter	Function	Control Signal	Description
Propagation Delays			
T_{IOTHZ}			Time after T input of the IOB is toggled that the pad goes to high-impedance.
T_{IOTON}			Time after the T input of the IOB is toggled that the pad goes from high-impedance to valid data.
$T_{IOTLPHZ}$			Time after the T input of the IOB via transparent latch is toggled that the pad goes to high-impedance.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 50/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 50 of 947

Table 2-7: **IOB 3-State Timing Parameters *(Continued)***

Parameter	Function	Control Signal	Description
$T_{IOTLPON}$			Time after the T input of the IOB via transparent latch is toggled that the pad goes from high-impedance to valid data.
T_{GTS}			Time after the Global 3-state signal is asserted that the pad goes to high-impedance.
Setup and Hold With Respect to Clock at IOB 3-State Register			
T_{xxCK} = Setup time (before clock edge) T_{xxCKxx} = Hold time (after clock edge)			The following descriptions are for setup times only.
T_{IOTCK}/T_{IOCKT}	T input		Time before the clock that the signal must be stable at the T input of the IOB 3-state Register.
$T_{IOTCECK}/T_{IOCKTCE}$	TCE input		Time before the clock that the clock enable signal must be stable at the TCE input of the IOB 3-state Register.
$T_{IOSRCKT}/T_{IOCKTSR}$	SR input (TFF)		Time before the clock that the set/reset signal.
Clock to Out			
T_{IOCKHZ}	Clock (CLK) to pad High-Z		Time after clock that the pad goes to high-impedance.
T_{IOCKON}	Clock (CLK) to valid data on pad		Time after clock that the pad goes from high-impedance to valid data.
Set/Reset Delays			
T_{IOSRHZ}	SR Input to pad High-Z (asynchronous)		Time after the SR signal is toggled that the pad goes to high-impedance.
T_{IOSRON}	SR Input to valid data on pad (asynchronous)		Time after the SR signal is toggled that the pad goes from high-impedance to valid data.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 51/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 51 of 947

Timing Characteristics

Figure 2-20 illustrates IOB 3-state register timing.

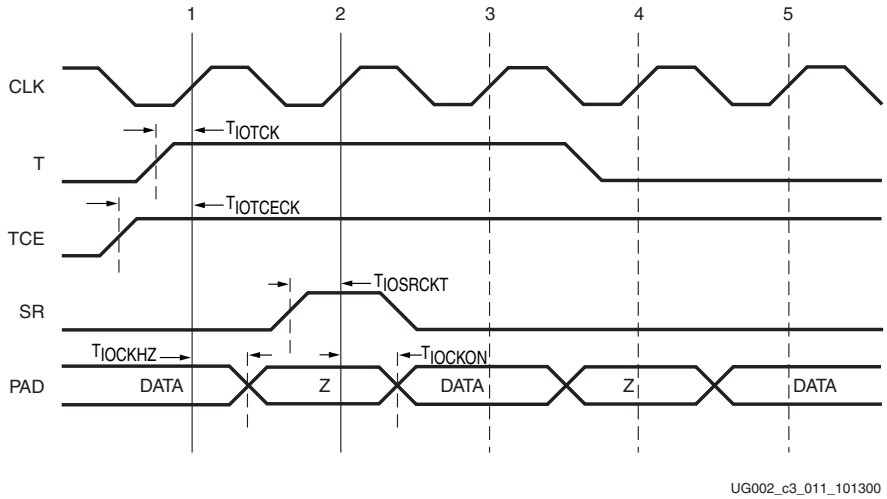


Figure 2-20: **IOB 3-State Register Timing Characteristics**

Clock Event 1

- At time $T_{IOTCECK}$ before Clock Event 1, the 3-state clock enable signal becomes valid-high at the TCE input of the 3-state register, enabling the 3-state register for incoming data.
- At time T_{IOTCK} before Clock Event 1 the 3-state signal becomes valid-high at the T input of the 3-state register, returning the pad to high-impedance at time T_{IOCKHZ} after Clock Event 1.

Clock Event 2

At time $T_{IOSRCKT}$ before Clock Event 2, the SR signal (configured as synchronous reset in this case) becomes valid-high, resetting the 3-state register and returning the pad to valid data at time T_{IOSRON} after Clock Event 2.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 52 of 947

Timing Characteristics, DDR

Figure 2-21 illustrates IOB DDR 3-state register timing.

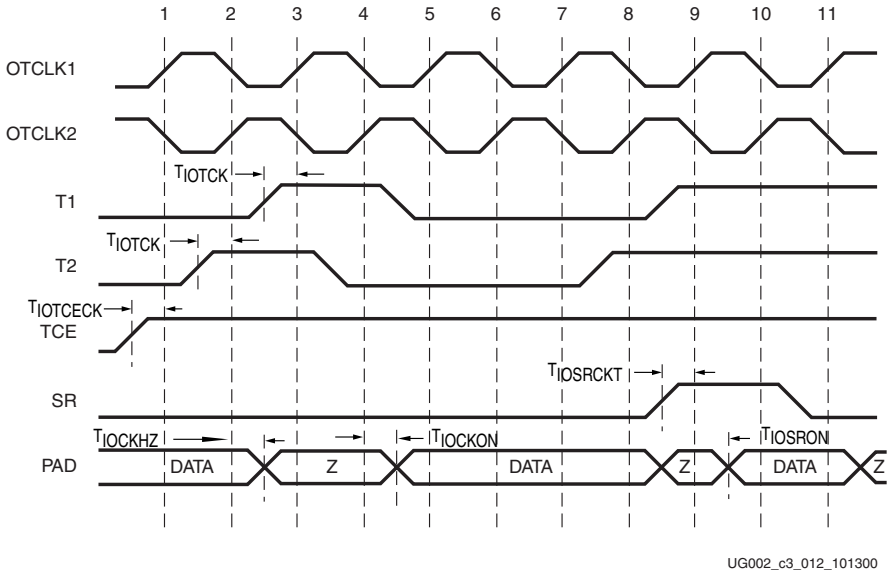


Figure 2-21: **IOB DDR 3-State Register Timing Characteristics**

Clock Event 1

At time $T_{IOTCECK}$ before Clock Event 1, the 3-state clock enable signal becomes valid-high at the TCE input of both of the DDR 3-state registers, enabling them for incoming data. Since the TCE signal is common to both DDR registers, care must be taken to toggle this signal between the rising edges of OTCLK1 and OTCLK2 as well as meeting the register setup-time relative to both clocks.

Clock Event 2

At time T_{IOTCK} before Clock Event 2 (rising edge of OTCLK2), the 3-state signal T2 becomes valid-high at the T2 input of 3-state register 2, switching the pad to high-impedance at time T_{IOCKHZ} after Clock Event 2.

Clock Event 3

At time T_{IOTCK} before Clock Event 3 (rising edge of OTCLK1), the 3-state signal T1 becomes valid-high at the T1 input of 3-state register 1, keeping the pad at high-impedance for another half clock cycle (half the period of OTCLK1 or 2).

Clock Event 4

At time T_{IOTCK} before Clock Event 4 (rising edge of OTCLK2), the 3-state signal T2 becomes valid-low at the T2 input of 3-state register 2, switching the pad to valid data at time T_{IOCKON} after Clock Event 4. This is repeated for 3-state signal T1 at the following clock event (5) maintaining valid data on the pad until Clock Event 8.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 53 of 947

Clock Event 8

At time T_{IOTCK} before Clock Event 8 (rising edge of OTCLK2), the 3-state signal T2 becomes valid-high at the T2 input of 3-state register 2, switching the pad to high-impedance at time T_{IOCKHZ} after Clock Event 8.

Clock Event 9

At time $T_{IOSRCKT}$ before Clock Event 9 (rising edge of OTCLK1), the SR signal (configured as synchronous reset in this case) becomes valid-high at the SR input of 3-state Register 1, returning the pad to valid data at time T_{IOSRON} after Clock Event 9.

Pin-to-Pin Timing Models

This section explains the delays and timing parameters associated with the use of the Global Clock network and the DCM. These delays are true pin-to-pin delays relative to the Global Clock pin and an output or input pin with or without the DCM.

This section consists of two parts:

- "Global Clock Input to Output"
- "Global Clock Setup and Hold"

The former describes the delay from the Global Clock pin (with and without the DCM) to an output pin via an Output flip-flop. The latter describes the set-up time for an Input flip-flop from an input pin relative to the Global Clock pin (with and without the DCM).

The values reported in the switching characteristics section of the Virtex-II Pro Platform FPGA Data Sheet are for LVCMOS_25 12 mA I/O standards. For different I/O standards, adjust these values with those shown in the "IOB Switching Characteristics Standard Adjustments" tables.

This section is intended to be used in conjunction with the section on switching characteristics in the Virtex-II Pro Platform FPGA Data Sheet and the Timing Analyzer (TRCE) report from Xilinx software. For specific timing parameter values, refer to the Virtex-II Pro Platform FPGA Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 54 of 947

Global Clock Input to Output

Figure 2-22 illustrates the paths associated with the timing parameters defined in this section. Note that they differ only in their use of the DCM.

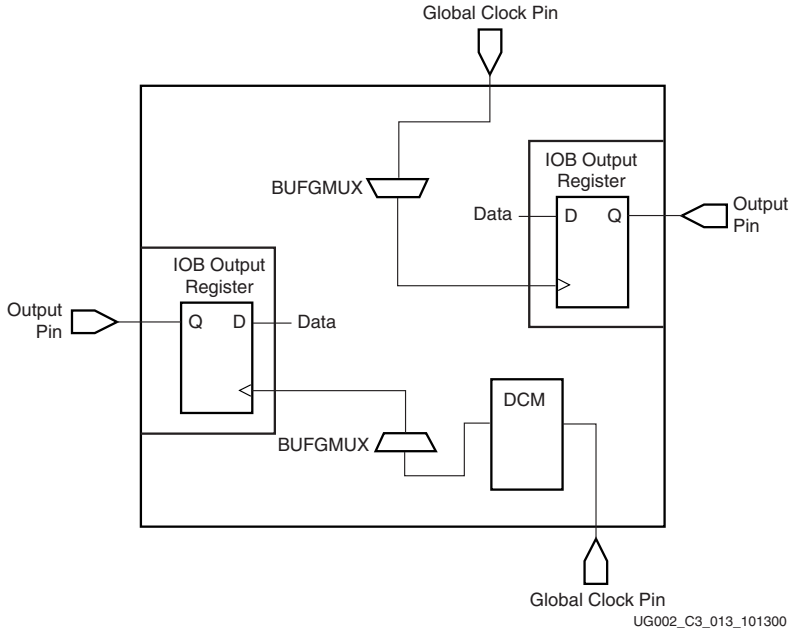


Figure 2-22: **Global Clock Input to Output Model**

Timing Parameters

Table 2-8: **Global Clock Input to Output Timing Parameters**

Parameter	Description
$T_{ICKOFDLL}$	Time after the Global Clock (pin), using the DCM, that the output data from an IOB Output flip-flop is stable at the output pin.
T_{ICKOF}	Time after the Global Clock (pin), without the DCM, that the output data from an IOB Output flip-flop is stable at the output pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 55/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 55 of 947

Timing Characteristics

The waveforms depicted in Figure 2-23 demonstrate the relation of the Global Clock pin, the output data, and the use of the timing parameters.

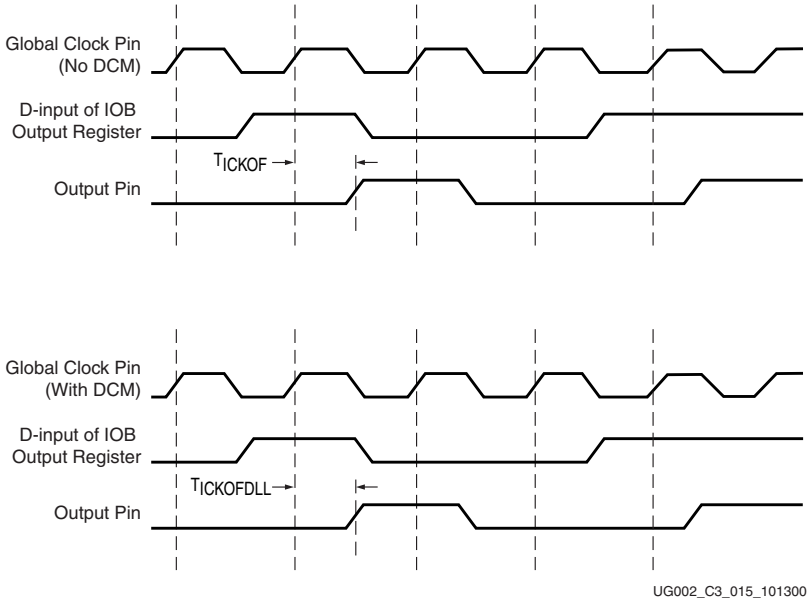


Figure 2-23: **Global Clock Input to Output Timing Characteristics**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 56/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 56 of 947

Global Clock Setup and Hold

Figure 2-24 illustrates the paths associated with the timing parameters defined in this section. Note, they differ only in their use of the DCM.

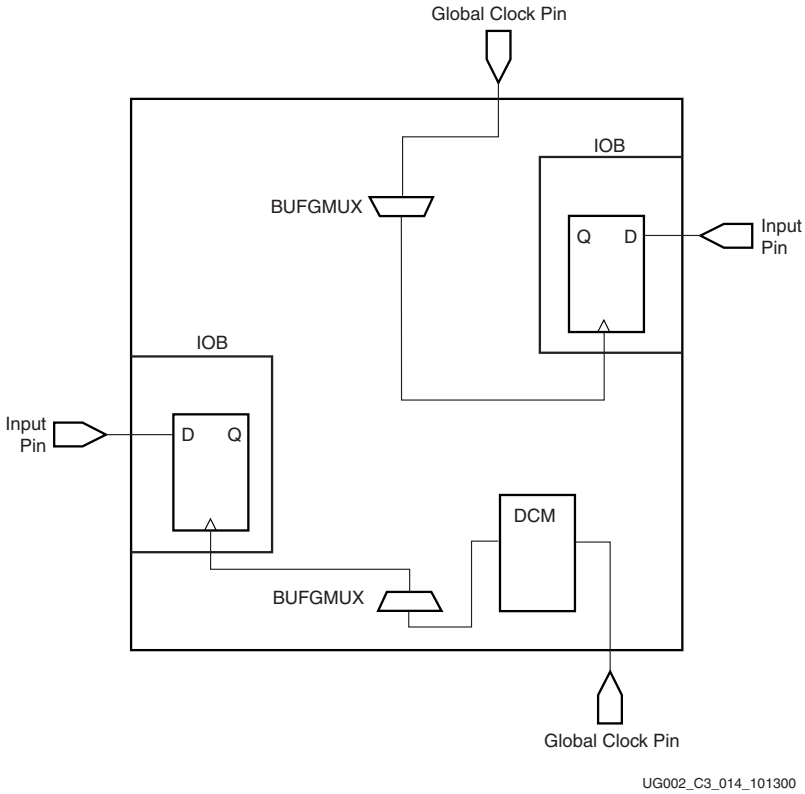


Figure 2-24: **Global Clock Setup and Hold Model**

Timing Parameters

Setup and Hold for Input Registers Relative to the Global Clock (pin):

- T_{PSDLL} / T_{PHDLL} - Time before the Global Clock (pin), with DCM, that the input signal must be stable at the D-input of the IOB input register.
- T_{PSFD} / T_{PHFD} - Time before the Global Clock (pin), without DCM, that the input signal must be stable at the D-input of the IOB input register.

  Note: T_{PSFD} = Setup time (before clock edge) and T_{PHFD} = Hold time (after clock edge). The previous descriptions are for setup times only.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 57 of 947

Timing Characteristics

The waveforms depicted in Figure 2-25 demonstrate the relation of the Global Clock pin, the input data, and the use of the timing parameters.

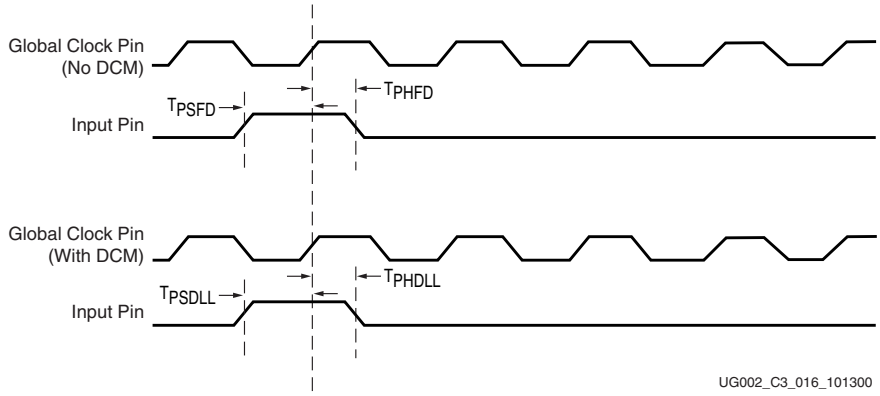


Figure 2-25: **Global Clock Setup and Hold Timing Characteristics**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 58 of 947

Digital Clock Manager Timing Model

This section describes the timing parameters associated with the Digital Clock Manager (DCM), which are reported in the Virtex-II Pro Platform FPGA Data Sheet. Note that these parameters are not used by the Timing Analyzer software in the production of timing reports; they are all measured values and are fully characterized in silicon. For specific timing parameter values, refer to the Virtex-II Pro Platform FPGA Data Sheet. This section discusses the following:

- **Operating Frequency Ranges:** The minimum and maximum frequencies supported by the DCM for all clock inputs and outputs.
- **Input Clock Tolerances:** Input clock period (pulse widths), jitter, and drift requirements for proper function of the DCM for all clock inputs.
- **Output Clock Precision:** Output clock period jitter, phase offsets, and duty cycle for all clock outputs of the DCM (worst case).
- **Miscellaneous Timing Parameters:** DCM lock times, Tap delay and shifting range.

For a detailed description of input clock tolerance, jitter, and phase offset see the waveforms at the end of this section.

Operating Frequency Ranges

Figure 2-26 illustrates the DCM functional block and corresponding timing parameters for all clock inputs and outputs.

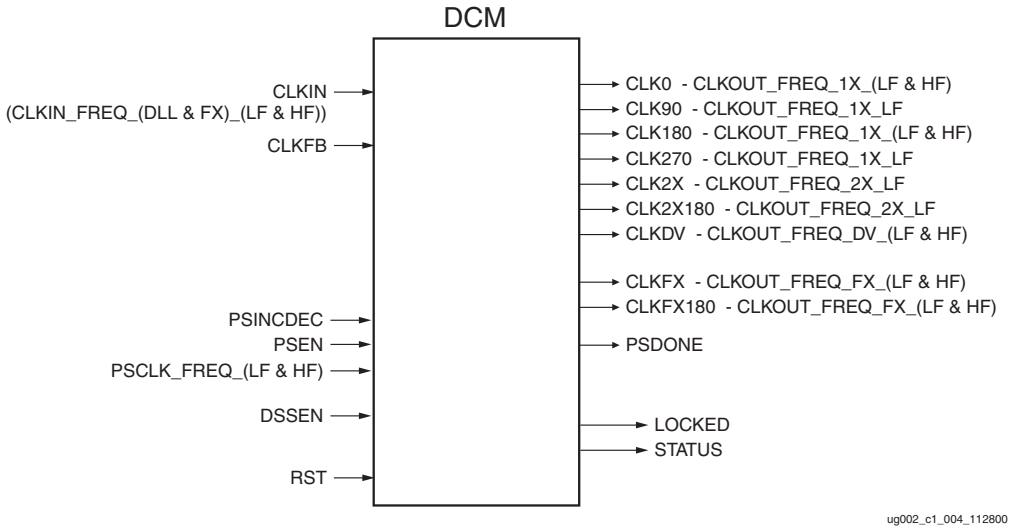


Figure 2-26: **DCM Functional Block: Operating Frequency Ranges**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 59/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 59 of 947

Table 2-9: **Operating Frequency Range Parameters**

Parameter	Description
Low Frequency Mode	
CLKOUT_FREQ_1X_LF	The minimum and maximum frequency for the CLK0, CLK90, CLK180, CLK270 outputs of the DCM in low-frequency mode.
CLKOUT_FREQ_2X_LF	The minimum and maximum frequency for the CLK2X and CLK2X180 outputs of the DCM in low-frequency mode.
CLKOUT_FREQ_DV_LF	The minimum and maximum frequency for the CLKDV output of the DCM in low-frequency mode.
CLKOUT_FREQ_FX_LF	The minimum and maximum frequency for the CLKFX and CLKFX180 outputs of the DCM in low-frequency mode.
CLKIN_FREQ_DLL_LF(1)	The minimum and maximum frequency for the CLKIN input to the DCM in low-frequency mode when using the delay-locked loop (DLL) outputs.
CLKIN_FREQ_FX_LF(2)	The minimum and maximum frequency for the CLKIN input to the DCM in low-frequency mode when using the FX outputs.
PSCLK_FREQ_LF	The minimum and maximum frequency for the PSCLK input to the DCM in low-frequency mode.
High Frequency Mode	
CLKOUT_FREQ_1X_HF	The minimum and maximum frequency for the CLK0, CLK180 outputs of the DCM in high-frequency mode.
CLKOUT_FREQ_DV_HF	The minimum and maximum frequency for the CLKDV output of the DCM in high-frequency mode.
CLKOUT_FREQ_FX_HF	The minimum and maximum frequency for the CLKFX and CLKFX180 outputs of the DCM in high-frequency mode.
CLKIN_FREQ_DLL_HF	The minimum and maximum frequency for the CLKIN input to the DCM in high-frequency mode when using the DLL outputs.
CLKIN_FREQ_FX_HF	The minimum and maximum frequency for the CLKIN input to the DCM in high-frequency mode when using the FX outputs.
PSCLK_FREQ_HF	The minimum and maximum frequency for the PSCLK input to the DCM in high-frequency mode.

Notes:

1. Delay-locked loop (DLL) outputs include: CLK0, CLK90, CLK180, CLK270, CLK2X, CLK2X180, and CLKDV.
2. FX outputs include: CLKFX and CLKFX180

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 60 of 947

Input Clock Tolerances

Table 2-10: **Input Clock Tolerance Parameters**

Parameter	Description
PSCLK_PULSE(1)	The minimum pulse width (HIGH and LOW) that the PSCLK input to the DCM can have over a range of frequencies.
CLKIN_PULSE	The minimum pulse width (HIGH and LOW) that the CLKIN input to the DCM can have over a range of frequencies. Also applies to PSCLK.
CLKFB_DELAY_VAR_EXT	The maximum allowed variation in delay (across environmental changes) of the feedback clock path when routed externally for board-level de-skew.
Low Frequency Mode	
CLKIN_CYC_JITT_DLL_LF	The maximum cycle-to-cycle jitter the CLKIN input to the DCM can have when using the DLL outputs in low-frequency mode.
CLKIN_CYC_JITT_FX_LF	The maximum cycle-to-cycle jitter the CLKIN input to the DCM can have when using the FX outputs in low-frequency mode.
CLKIN_PER_JITT_DLL_LF	The maximum period jitter the CLKIN input to the DCM can have when using the DLL outputs in low-frequency mode.
CLKIN_PER_JITT_FX_LF	The maximum period jitter the CLKIN input to the DCM can have when using the FX outputs in low-frequency mode.
High Frequency Mode	
CLKIN_CYC_JITT_DLL_HF	The maximum cycle-to-cycle jitter the CLKIN input to the DCM can have when using the DLL outputs in high-frequency mode.
CLKIN_CYC_JITT_FX_HF	The maximum cycle-to-cycle jitter the CLKIN input to the DCM can have when using the FX outputs in high-frequency mode.
CLKIN_PER_JITT_DLL_HF	The maximum period jitter the CLKIN input to the DCM can have when using the DLL outputs in high-frequency mode.
CLKIN_PER_JITT_FX_HF	The maximum period jitter the CLKIN input to the DCM can have when using the FX outputs in high-frequency mode.

Notes:

1. The frequencies applicable to CLKIN_PULSE range from 1 to >400 MHz. These frequencies also apply to PSCLK_PULSE. Since PSCLK can be less than 1 MHz, the pulse width under this condition is specified for PSCLK only.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 61/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 61 of 947

Output Clock Precision

Table 2-11: **Output Clock Precision Parameters**

Parameter	Description
CLKOUT_PER_JITT_0	The maximum period jitter of the CLK0 output clock from the DCM (worst case).
CLKOUT_PER_JITT_90	The maximum period jitter of the CLK90 output clock from the DCM (worst case).
CLKOUT_PER_JITT_180	The maximum period jitter of the CLK180 output clock from the DCM (worst case).
CLKOUT_PER_JITT_270	The maximum period jitter of the CLK270 output clock from the DCM (worst case).
CLKOUT_PER_JITT_2X	The maximum period jitter of the CLK2X and CLK2X180 output clocks from the DCM (worst case).
CLKOUT_PER_JITT_DV1	The maximum period jitter of the CLKDV (integer division) output clock from the DCM (worst case).
CLKOUT_PER_JITT_DV2	The maximum period jitter of the CLKDV (non-integer division) output clock from the DCM (worst case).
CLKOUT_PER_JITT_FX	The maximum period jitter of the FX output clocks from the DCM (worst case).
CLKIN_CLKFB_PHASE	Maximum phase offset between the CLKIN and CLKFB inputs to the DCM.
CLKOUT_PHASE	Maximum phase offset between any DCM clock outputs.
CLKOUT_DUTY_CYCLE_DLL	The duty-cycle precision for all DLL outputs.
CLKOUT_DUTY_CYCLE_FX	The duty-cycle precision for the FX outputs.

Miscellaneous DCM Timing Parameters

Table 2-12: **Miscellaneous DCM Timing Parameters**

Parameter	Description
LOCK_DLL	Time required for DCM to lock over a range of clock frequencies when using the DLL outputs.
LOCK_FX	Time required for DCM to lock when using the FX outputs.
LOCK_DLL_FINE_SHIFT	Additional lock time when performing fine phase shifting.
FINE_SHIFT_RANGE	Absolute range for fine phase shifting.
DCM_TAP	Resolution of delay line.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 62 of 947

The waveforms in Figure 2-27 demonstrate the relationship between clock tolerance, jitter, and phase.

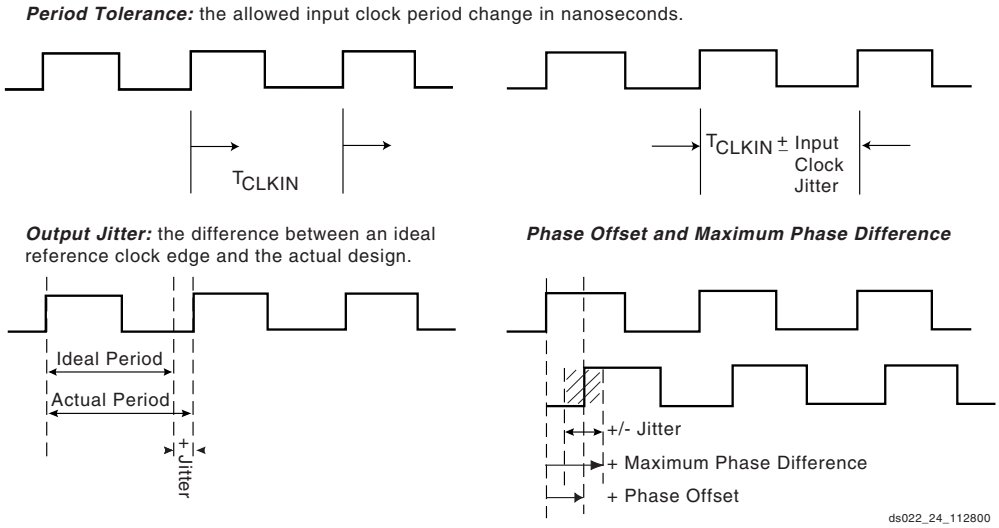


Figure 2-27: **DCM Jitter, Phase, and Tolerance Timing Waveforms**

Output jitter is period jitter measured on the DLL output clocks, excluding input clock jitter.

Phase offset between CLKIN and CLKFB is the worst-case fixed time difference between rising edges of CLKIN and CLKFB, excluding output jitter and input clock jitter.

Phase offset between clock outputs on the DLL is the worst-case fixed time difference between rising edges of any two DLL outputs, excluding output jitter and input clock jitter.

Maximum phase difference between CLKIN an CLKFB is the sum of output jitter and phase offset between CLKIN and CLKFB, or the greatest difference between CLKIN and CLKFB rising edges due to DLL alone (excluding input clock jitter).

Maximum phase difference between clock outputs on the DLL is the sum of output jitter and phase offset between any DLL clock outputs, or the greatest difference between any two DLL output rising edges due to DLL alone (excluding input clock jitter).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 63 of 947

Additional Timing Models in Other Publications: PPC405 Processor Block and RocketIO Transceiver

Due to their length and complexity, timing models for the IBM PPC405 Processor Block and the RocketIO Multi-Gigabit Transceiver are not included in this User Guide. They can be found in the publications described below, which cover in detail the operation and implementation of these Virtex-II Pro components:

IBM PPC405 Processor Block Timing Models

Timing models for the IBM PPC405 Processor Block can be found in the *PowerPC 405 Processor Block Reference Guide*. The most current version of this volume is available on the Xilinx website at www.xilinx.com/publications/products/ug_index.htm. It is intended to be used in conjunction with Module 3 of the Virtex-II Pro Platform FPGA Data Sheet and the Timing Analyzer (TRCE) report from Xilinx software. For specific timing parameter values, refer to the data sheet.

RocketIO Transceiver Timing Models

Timing models for the RocketIO Transceiver can be found in the *RocketIO Transceiver User Guide*, UG024. The most current version of this volume is available on the Xilinx website at www.xilinx.com/publications/products/ug_index.htm.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 64 of 947

Design Considerations

Summary

This chapter covers the following topics:

- RocketIO Transceiver
- Processor Block
- Global Clock Networks
- Digital Clock Managers (DCMs)
- Block SelectRAM™ Memory
- Distributed SelectRAM Memory
- Look-Up Tables as Shift Registers (SRLs)
- Large Multiplexers
- Sum of Products (SOP) Logic
- Embedded Multipliers
- Single-Ended SelectIO™-Ultra Resources
- Digitally Controlled Impedance (DCI)
- Double-Data-Rate (DDR) I/O
- LVDS I/O
- LVPECL I/O
- Bitstream Encryption
- CORE Generator System

Introduction

This chapter describes how to take advantage of the many special features of Virtex-II Pro architecture to achieve maximum density and performance. In many cases, the functions described can be automatically generated using the Xilinx CORE Generator™ tool. This is noted throughout the chapter, in the following sections specifically:

- Block SelectRAM™ Memory
- Distributed SelectRAM Memory
- Look-Up Tables as Shift Registers (SRLs)
- Large Multiplexers
- Embedded Multipliers

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 65 of 947

RocketIO Transceiver

Virtex-II Pro devices provide up to twenty-four multi-gigabit transceivers capable of various high-speed serial standards such as Gigabit Ethernet, FiberChannel, Infiniband, and XAUI. In addition, the channel-bonding feature aggregates multiple channels allowing for even higher data transfer rate.

For the most up-to-date information on RocketIO transceiver features, design examples, power considerations, and board layout suggestions, refer to the most current revision of *RocketIO Transceiver User Guide* on the Xilinx website at www.xilinx.com/publications/products/ug_index.htm.

Processor Block

Two additional user manuals detail the hardware and software design aspects of the processor block. The *PowerPC 405 Processor Block Reference Guide* provides information on input/output signals, timing relationships between signals, and the mechanisms software can use to control the interface operation. The *PowerPC Processor User Manual* serves as a stand-alone reference for application and system programmers of the PPC405 processor core.

For the most up-to-date information on the PPC405 processor core, refer to the current revisions of these manuals on the Xilinx website at www.xilinx.com/publications/products/ug_index.htm.

Global Clock Networks

Introduction

Virtex-II Pro devices support very high frequency designs and thus require low-skew advanced clock distribution. With device density up to 10 million system gates, numerous global clocks are necessary in most designs. Therefore, to provide a uniform and portable solution (soft-IP), all Virtex-II Pro devices from XC2VP2 to XC2VP125 have 16 global clock buffers and support 16 global clock domains. Up to eight of these clocks can be used in any quadrant of the device by the synchronous logic elements (that is, registers, 18Kb block RAM, pipeline multipliers) and the IOBs. The software tools place and route these global clocks automatically.

If the design uses between 8 and 16 clocks, it must be partitioned into quadrants, with up to 8 clocks per quadrant. If more than 16 clocks are required, the backbone (24 horizontal and vertical long lines routing resources) can be used as additional clock network.

In addition to clock distribution, the 16 clock buffers are also “glitch-free” synchronous 2:1 multiplexers. These multiplexers are capable of switching between two asynchronous (or synchronous) clocks at any time. No particular phase relations between the two clocks are needed. The clock multiplexers can also be configured as a global clock buffer with a clock enable. The clock can be stopped High or Low at the clock buffer output.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 66 of 947

Clock Distribution Resources

The various resources available to manage and distribute the clocks include:

- Sixteen clock pads that can be used as regular user I/Os if not used as clock inputs. The sixteen clock pads can be configured for any I/O standard, including differential standards (for example, LVDS).
- Sixteen "IBUFG" elements that represent the clock inputs in a VHDL or Verilog design.
- Eight "IBUFGDS" elements (that is, attributes LVPECL_25, LVDS_25, LDT_25, or ULVDS_25) that represent the differential clock input pairs in a VHDL or Verilog design. Each IBUFGDS replaces two IBUFG elements.
- Four to twelve Digital Clock Managers (DCMs), depending on the device size, to de-skew and generate the clocks. For more information on DCMs, see "Digital Clock Managers (DCMs)," page 83.
- Sixteen "BUFGMUX" elements that can consist of up to sixteen global clock buffers (BUFG), global clock buffers with a clock enable (BUFGCE), or global clock multiplexers (BUFGMUX).

Figure 3-1 illustrates the placement of these clock resources in Virtex-II Pro devices (the XC2VP20 through the XC2VP70) that have eight DCMs.

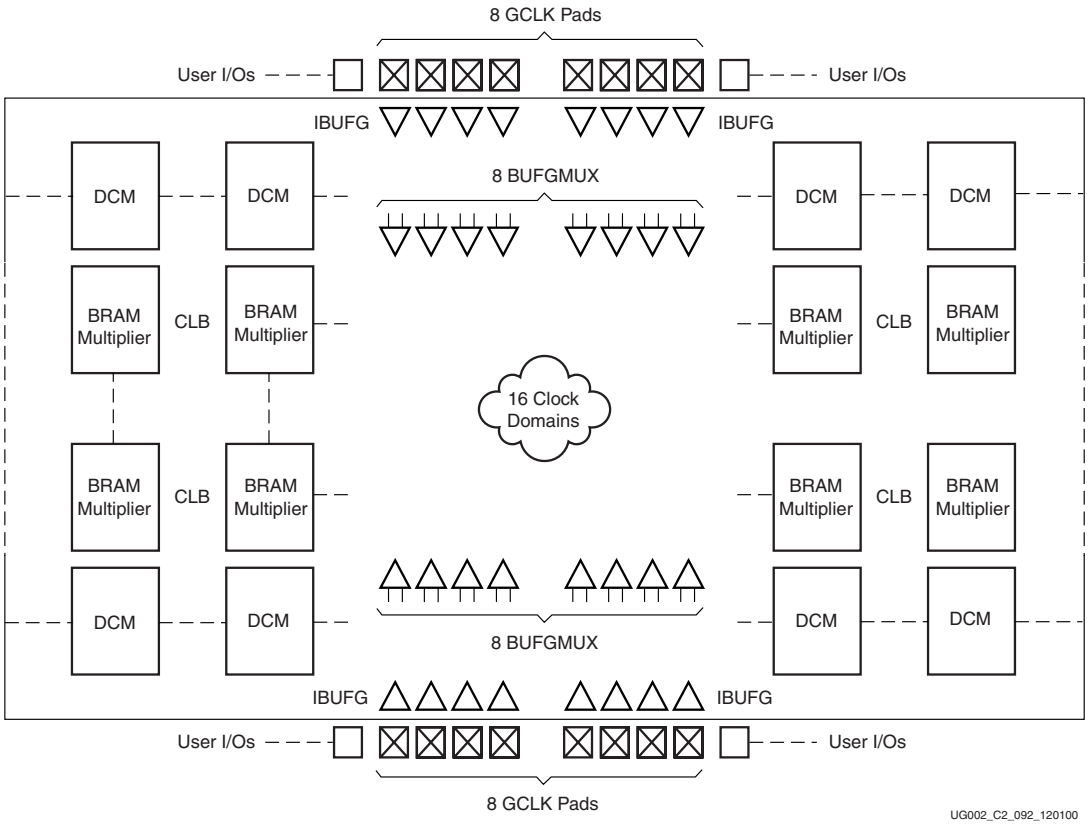


Figure 3-1: **Clock Resources in Virtex-II Pro Devices**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 67 of 947

The simple scheme to distribute an external clock in the device is to implement a clock pad with an IBUFG input buffer connected to a BUFG global buffer, as shown in Figure 3-2 and Figure 3-3. The primary (GCLKP) and secondary (GCLKS) clock pads have no relationship with the P-side and N-side of differential clock inputs. In banks 0 and 1, the GCLKP corresponds to the N-side, and the GCLKS corresponds to the P-side of a differential clock input. In banks 4 and 5, this correspondence is reversed.

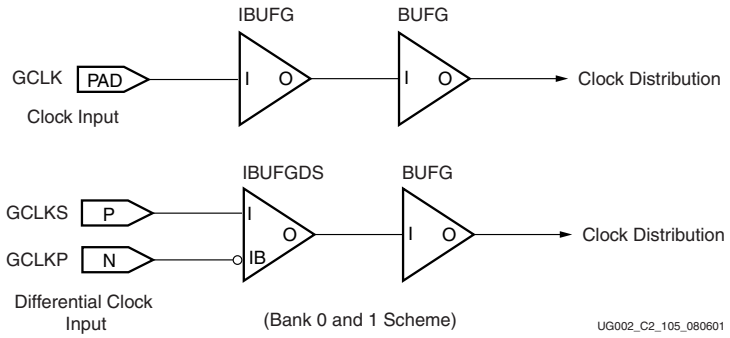


Figure 3-2: **Simple Clock Distribution (Bank 0 and 1 Scheme)**

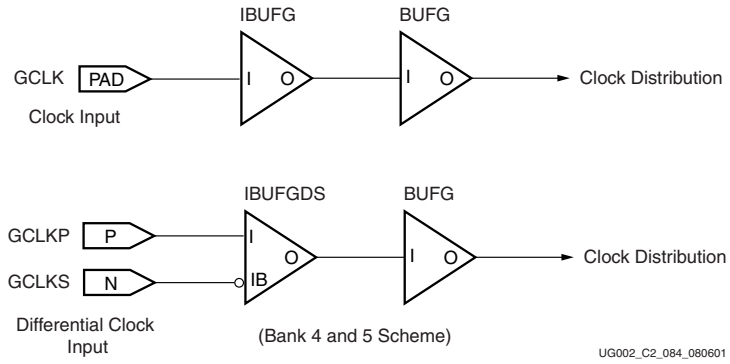


Figure 3-3: **Simple Clock Distribution (Bank 4 and 5 Scheme)**

Major synthesis tools automatically infer the IBUFG and BUFG when the corresponding input signal is used as a clock in the VHDL or Verilog code.

A high frequency or adapted (frequency, phase, and so forth) clock distribution with low skew is implemented by using a DCM between the output of the IBUFG and the input of the BUFG, as shown in Figure 3-4. "Digital Clock Managers (DCMs)," page 83 provides details about DCMs and their use.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 68 of 947

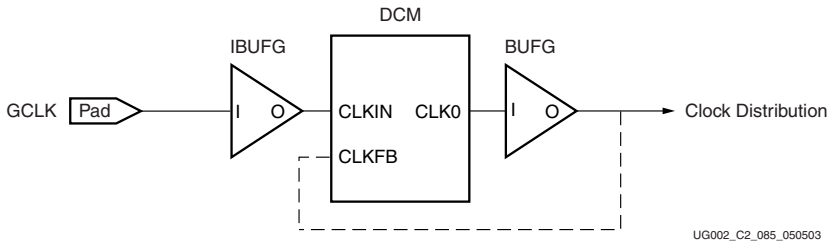


Figure 3-4: **Clock Distribution with DCM**

Clock distribution from internal sources is also possible with a BUFG only or with a DCM, as shown in Figure 3-5.

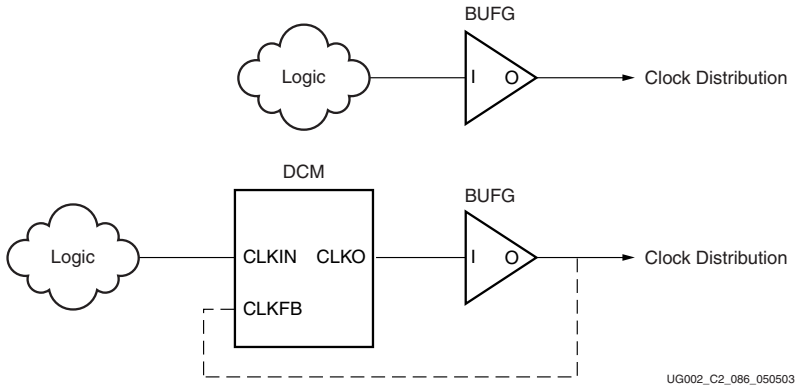


Figure 3-5: **Internal Logic Driving Clock Distribution**

Global Clock Inputs

The clock buffer inputs are fed either by one of the 16 clock pads (refer to the Virtex-II Pro Data Sheet), by the outputs of the DCM, or by local interconnect. Each clock buffer can be a synchronous "glitch-free" 2:1 multiplexer with two clock inputs and one select input. Internal logic (or alternatively a regular IOB) can feed the clock inputs. Any internal or external signal can drive the select input or clock enable input.

The possible inputs driving a global clock buffer or multiplexer are summarized in Table 3-1.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 69/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 69 of 947

Table 3-1: **Inputs Driving Global Clock Buffers or DCMs**

Source	Destination				
	BUFG(I) or BUFGCE(I)	**BUFGCE (CE)**	**BUFGMUX (I0 or I1)**	**BUFGMUX (S)**	**DCM (CLKIN)**
External Clock via IBUFG(O)	Dedicated in same quadrant(1)	NA	Dedicated in same quadrant(1)	NA	Same edge
DCM Clock Outputs	Same edge (top or bottom)(2)	NA	Same edge (top or bottom)(2)	NA	General interconnect(3)
Internal Logic	General interconnect	General interconnect	General interconnect	General interconnect	General interconnect(3)
User I/O Pad via IBUF(O) (not IBUFG)	General interconnect	General interconnect	General interconnect	General interconnect	General interconnect(3)
BUFG(O)	NA	NA	NA	NA	Global clock net
BUFGMUX(O)	NA	NA	General interconnect	NA	Global clock net

Notes:

1. Not all IBUFGs in the quadrant have a dedicated connection to a specific BUFG. Others would require general interconnect to be hooked up.
2. Same edge (top or bottom) enables use of dedicated routing resources.
3. Pad to DCM input skew is not compensated.

All BUFG (BUFGCE, BUFGMUX) outputs are available at the quadrant boundaries.

The output of the global clock buffer can be routed to non-clock pins.

Primary and Secondary Global Multiplexers

Each global clock buffer is a self-synchronizing circuit called a clock multiplexer.

The 16 global clock buffers or multiplexers are divided as follows:

- Eight primary clock multiplexers
- Eight secondary clock multiplexers

No hardware difference exists between a primary and a secondary clock multiplexer. However, some restrictions apply to primary/secondary multiplexers, because they share input connections, as well as access to a quadrant.

Each Virtex-II Pro device is divided into four quadrants: North-West, South-West, North-East, and South-East. Each quadrant has two primary and two secondary clock multiplexers. The clock multiplexers are indexed 0 to 7, with one primary and one secondary for each index, alternating on the top and on the bottom (i.e., clock multiplexer “0P” at the bottom is facing clock multiplexer “0S” at the top).

In each device, the eight top/bottom clock multiplexers are divided into four primary and four secondary, indexed 0 to 7, as shown in Figure 3-6.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 70 of 947

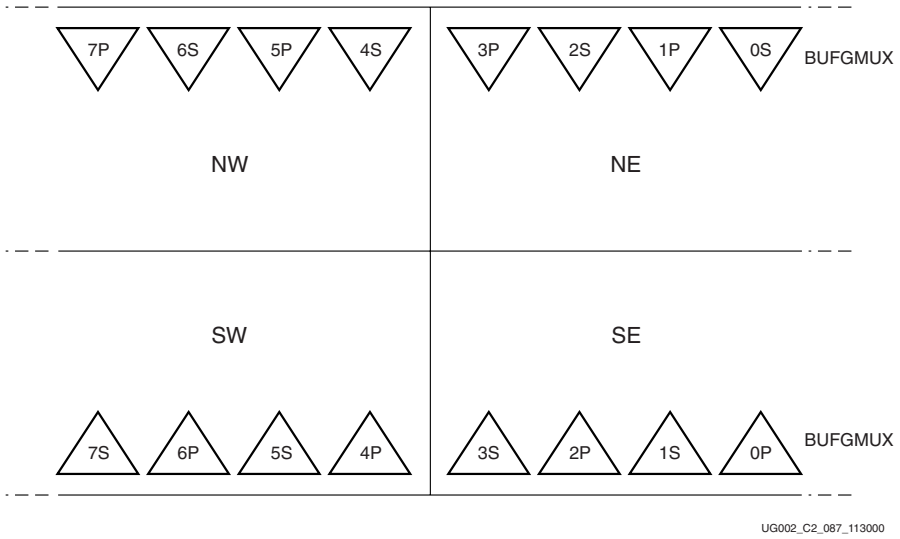


Figure 3-6: **Primary and Secondary Clock Multiplexer Locations**

Primary/Secondary: Rule 1

Considering two "facing" clock multiplexers (BUFG#P and BUFG#S), one or the other of these clock outputs can enter any quadrant of the chip to drive a clock within that quadrant, as shown in Figure 3-7. Note that the clock multiplexers "xP" and "xS" compete for quadrant access. For example, BUFG0P output cannot be used in the same quadrant as BUFG0S.

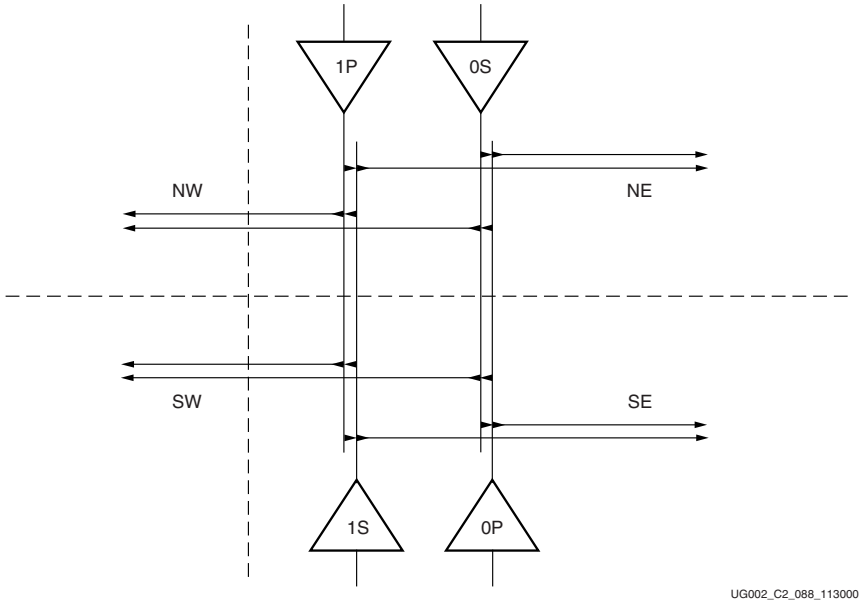


Figure 3-7: **Facing BUFG#P and BUFG#S Connections**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 71 of 947

Primary/Secondary: Rule 2

In a BUFGCE or BUFGMUX configuration, shared inputs have to be considered. Any two adjacent clock multiplexers share two inputs, as shown in Figure 3-8. The clock multiplexer "1P" and "0S" have common I0/I1 and I1/I0 inputs.

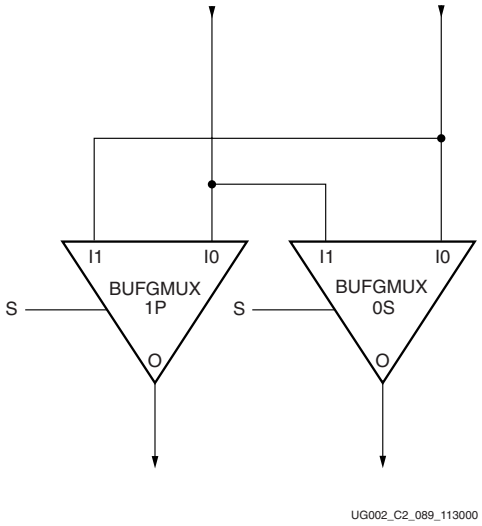


Figure 3-8: **Clock Multiplexer Pair Sharing Clock Multiplexer Inputs**

Table 3-2 lists the clock multiplexer pairs in any Virtex-II Pro device. The primary multiplexer inputs I1/I0 are common with the corresponding secondary multiplexer inputs I0/I1 (i.e., Primary I1 input is common with secondary I0 input, and primary I0 input is common with secondary I1 input).

Table 3-2: **Top Clock Multiplexer Pairs**

Primary I1/I0	1P	3P	5P	7P
Secondary I0/I1	0S	2S	4S	6S

Table 3-3: **Bottom Clock Multiplexer Pairs**

Primary I1/I0	0P	2P	4P	6P
Secondary I0/I1	1S	3S	5S	7S

Primary/Secondary Usage

For up to eight global clocks, it is safe to use the eight primary global multiplexers (1P, 3P, 5P, 7P on the top and 0P, 2P, 4P, 6P on the bottom). Because of the shared inputs, a maximum of eight independent global clock multiplexers can be used in a design, as shown in Figure 3-9.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 72 of 947

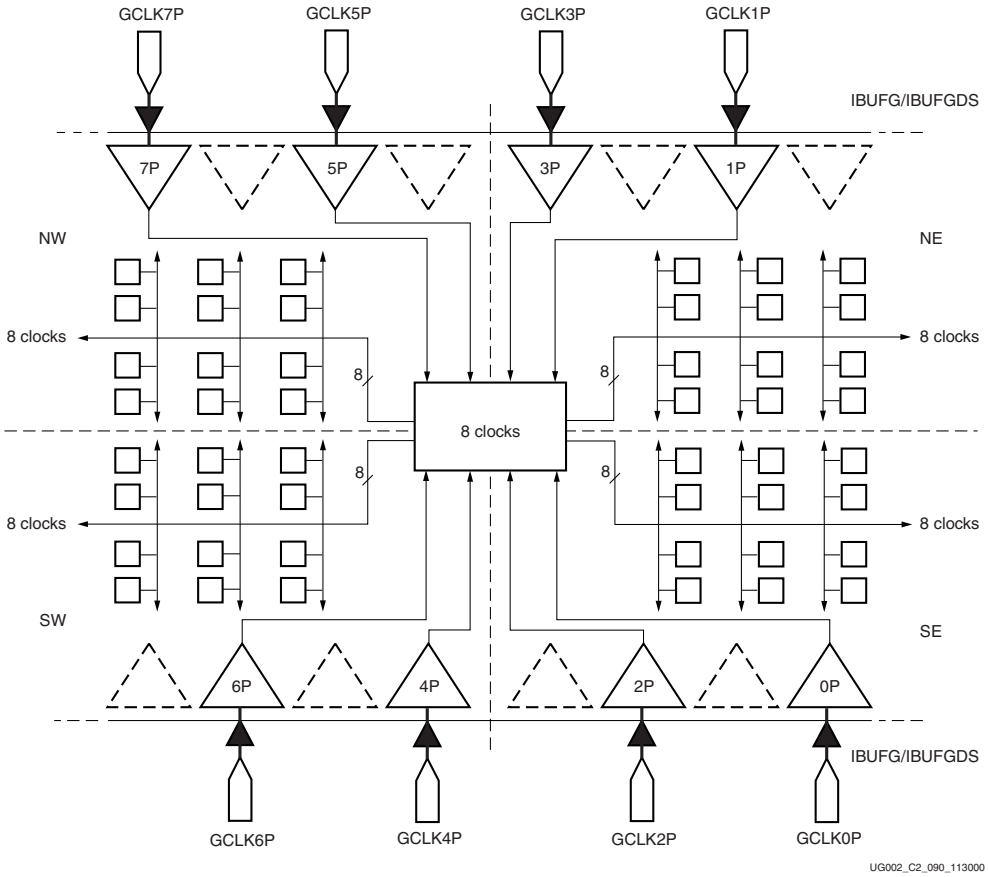


Figure 3-9: **Eight Global Clocks Design**

DCM Clocks

The four clock pins (IBUFG) in a quadrant can feed all DCMs in the same edge of the device. The clock-to-out and setup times are identical for all DCMs. Up to four clock outputs per DCM can be used to drive any clock multiplexer on the same edge (top or bottom), as shown in Figure 3-10.

BUFG Exclusivity

Each DCM has a restriction on the number of BUFGs it can drive on its (top or bottom) edge. Pairs of buffers with shared dedicated routing resources exist such that only one buffer from each dedicated pair can be driven by a single DCM. The exclusive pairs for each edge are: 1:5, 2:6, 3:7, and 4:8.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 73/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 73 of 947

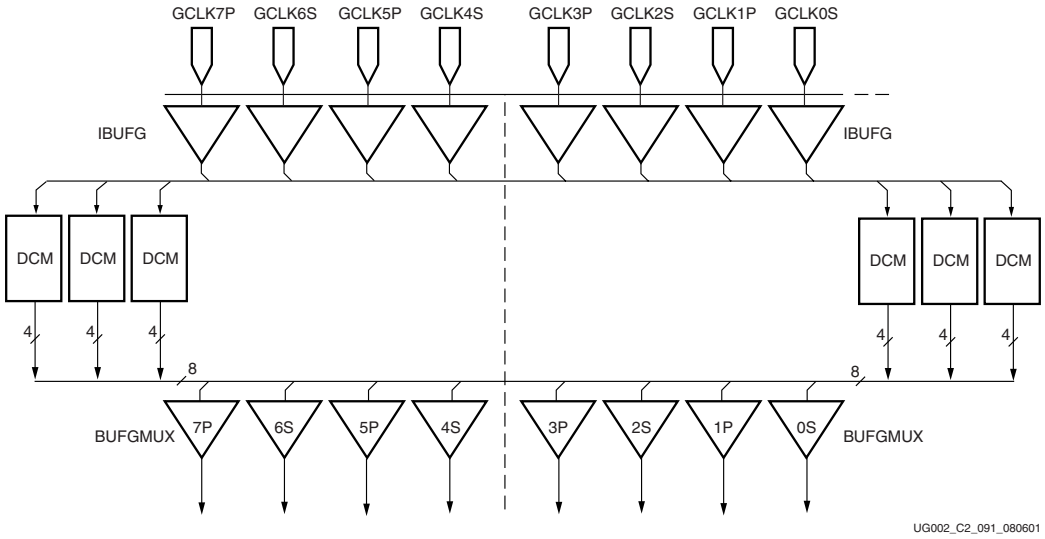


Figure 3-10: **DCM Clocks**

Clock Output

The clock distribution is based on eight clock trees per quadrant. Each clock multiplexer output is driving one global clock net. The Virtex-II Pro device has eight dedicated low-skew clock nets. The device is divided into four quadrants (NW, NE, SW and SE) with eight global clocks available per quadrant.

Eight clock buffers are in the middle of the top edge and eight are in the middle of the bottom edge. Any of these 16 clock buffer outputs can be used in any quadrant, up to a maximum of eight clocks per quadrant, as illustrated in Figure 3-11, provided there is not a primary vs. secondary conflict.

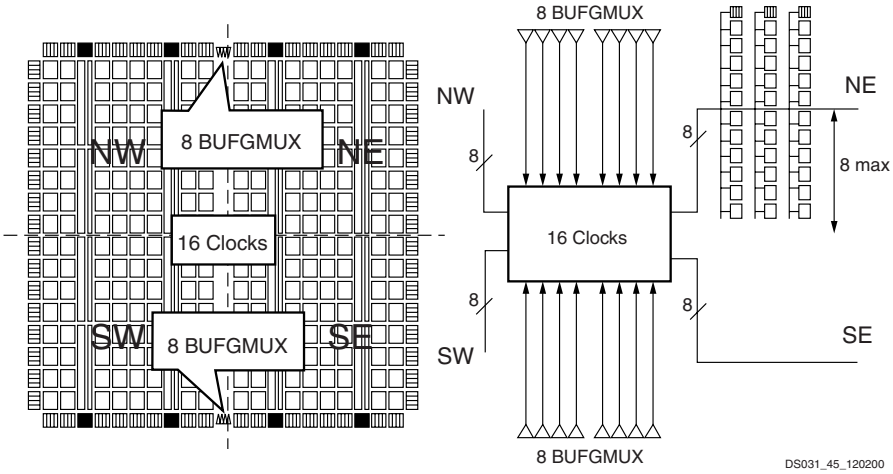


Figure 3-11: **Clock Buffer Outputs per Quadrant**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 74/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 74 of 947

Designs with more than eight clocks must be floorplanned manually or automatically, distributing the clocks in each quadrant. As an example, a design with 16 clocks can be floorplanned as shown in Figure 3-12.

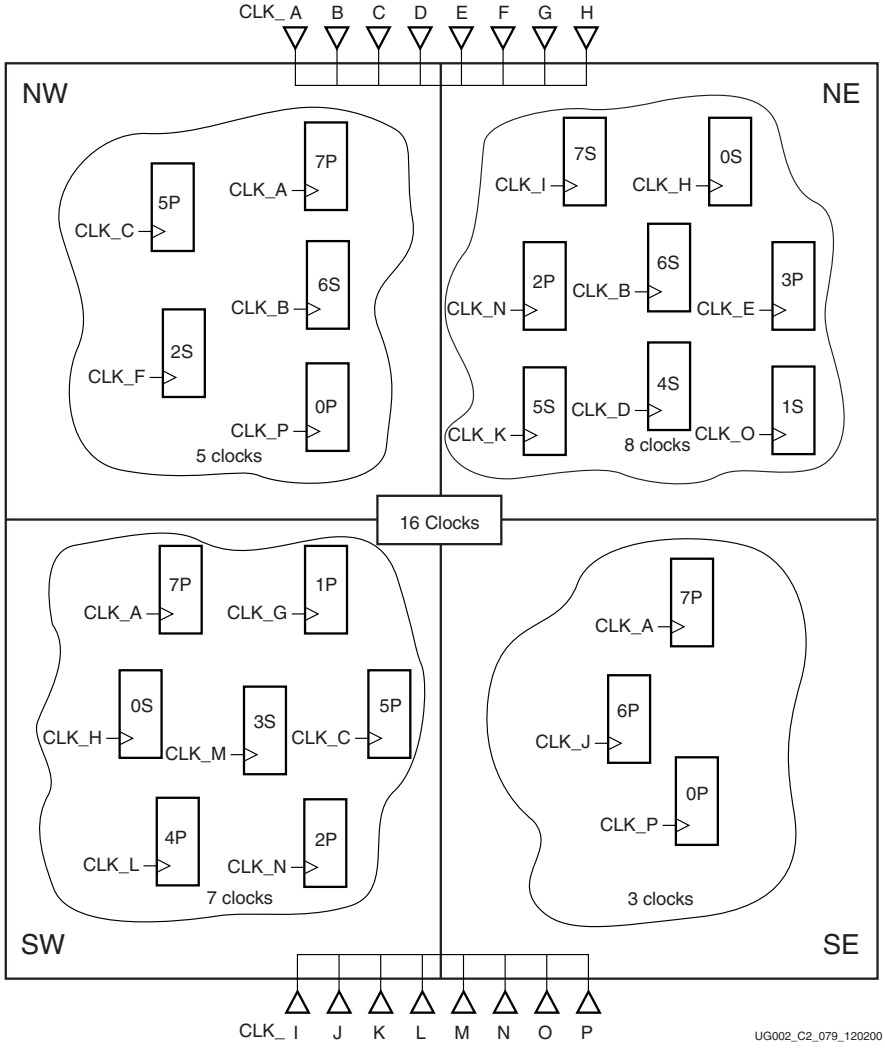


Figure 3-12: **16-Clock Floorplan**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 75/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 75 of 947

The clock nets and clock buffers in this example are associated as shown in Table 3-4.

Table 3-4: **Clock Net Association With Clock Buffers**

Clock Net (top edge)	CLK_A	CLK_B	CLK_C	CLK_D	CLK_E	CLK_F	CLK_G	CLK_H
BUFG	7P	6S	5P	4S	3P	2S	1P	0S
Clock Net (bottom edge)	CLK_I	CLK_J	CLK_K	CLK_L	CLK_M	CLK_N	CLK_O	CLK_P
BUFG	7S	6P	5S	4P	3S	2P	1S	0P
Quadrant NW	CLK_A	CLK_B	CLK_C	–	–	CLK_F	–	CLK_P
Quadrant SW	CLK_A	–	CLK_C	CLK_L	CLK_M	CLK_N	CLK_G	CLK_H
Quadrant NE	CLK_I	CLK_B	CLK_K	CLK_D	CLK_E	CLK_N	CLK_O	CLK_H
Quadrant SE	CLK_A	CLK_J	–	–	–	–	–	CLK_P

CLK_A is used in three quadrants, and the other clocks are used in one or two quadrants, regardless of the position of the clock buffers (multiplexers), as long as they are not competing to access the same quadrant. That is, CLK_A (BUFG7P) cannot be used in the same quadrant with CLK_I (BUFG7S). Refer to "Primary/Secondary: Rule 1," page 67.) In other words, two buffers with the same index (0 to 7) cannot be used in the same quadrant.

Each register, block RAM, registered multiplier, or DDR register (IOB) can be connected to any of the eight clock nets available in a particular quadrant.

Note that if a global clock (primary buffer) is used in four quadrants, the corresponding secondary buffer is not available.

Power Consumption

Clock trees have been designed for low skew and low-power operation. Any unused branch is disconnected, as shown in Figure 3-13.

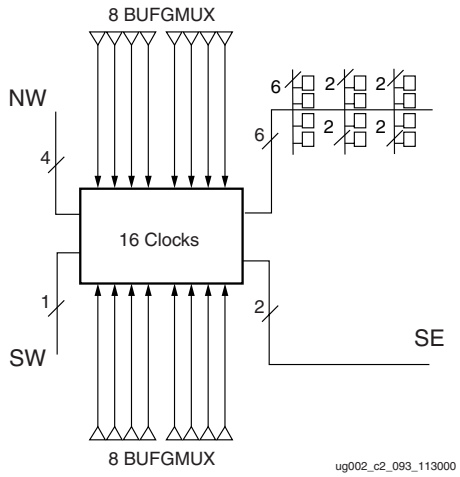


Figure 3-13: **Low-Power Clock Network**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 76 of 947

Also available to reduce overall power consumption are the BUFGCE feature, for dynamically driving a clock tree only when the corresponding module is used, and the BUFGMUX feature, for switching from a high-frequency clock to a low-frequency clock.

The frequency synthesizer capability of the DCM can generate the low (or high) frequency clock from a single source clock, as illustrated in Figure 3-14. (See "Digital Clock Managers (DCMs)," page 83.)

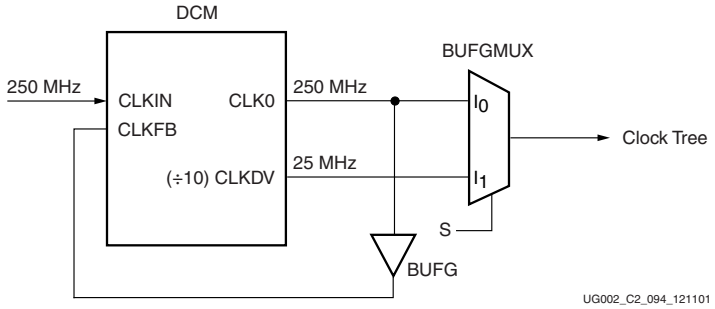


Figure 3-14: **Dynamic Power Reduction Scheme**

Library Primitives and Submodules

The primitives in Table 3-5 are available with the input, output, and control pins listed.

Table 3-5: **Clock Primitives**

Primitive	Input	Output	Control
IBUFG	I	O	–
IBUFGDS	I, IB	O	–
BUFG	I	O	–
BUFGMUX	I0, I1	O	S
BUFGMUX_1	I0, I1	O	S

Refer to "Single-Ended SelectIO™-Ultra Resources," page 180 for a list of the attributes available for IBUFG and Refer to "LVDS I/O," page 248 for a list of the attributes available for IBUFGDS.

The submodules in Table 3-6 are available with the input, output, and control pins listed.

Table 3-6: **Clock Submodules**

Submodule	Input	Output	Control
BUFGCE	I	O	CE
BUFGCE_1	I	O	CE

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 77/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 77 of 947

Primitive Functions

IBUFG

IBUFG is an input clock buffer with one clock input and one clock output.

IBUFGDS

IBUFGDS is a differential input clock buffer with two clock inputs (positive and negative polarity) and one clock output.

BUFG

All Virtex-II Pro devices have 16 global clock buffers (each of which can be used as BUFG, BUFGMUX, or BUFGCE).

BUFG is a global clock buffer with one clock input and one clock output, driving a low-skew clock distribution network. The output follows the input, as shown in Figure 3-15.

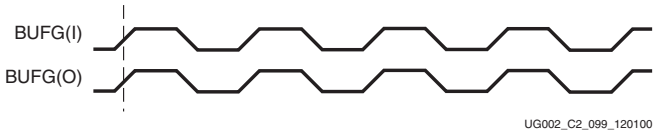


Figure 3-15: **BUFG Waveforms**

BUFGMUX and BUFGMUX_1

BUFGMUX (see Figure 3-16) can switch between two unrelated, even asynchronous clocks. Basically, a Low on S selects the I_0 input, a High on S selects the I_1 input. Switching from one clock to the other is done in such a way that the output High and Low time is never shorter than the shortest High or Low time of either input clock. As long as the presently selected clock is High, any level change of S has no effect. (For BUFGMUX_1, as long as the presently selected clock is Low, any level change of S has no effect.)

BUFGMUX is the preferred circuit for rising edge clocks, while BUFGMUX_1 is preferred for falling edge clocks.




Figure 3-16: **Virtex-II Pro BUFGMUX or BUFGMUX_1 Function**

Operation of the BUFGMUX Circuit

If the presently selected clock is Low while S changes, or if it goes Low after S has changed, the output is kept Low until the other ("to-be-selected") clock has made a transition from High to Low. At that instant, the new clock starts driving the output.

The two clock inputs can be asynchronous with regard to each other, and the S input can change at any time, except for a short setup time prior to the rising edge of the presently

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 78/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 78 of 947

selected clock; that is, prior to the rising edge of the BUFGMUX output O. Violating this setup time requirement can result in an undefined runt pulse output.

Figure 3-17 shows a switch-over from CLK0 to CLK1.

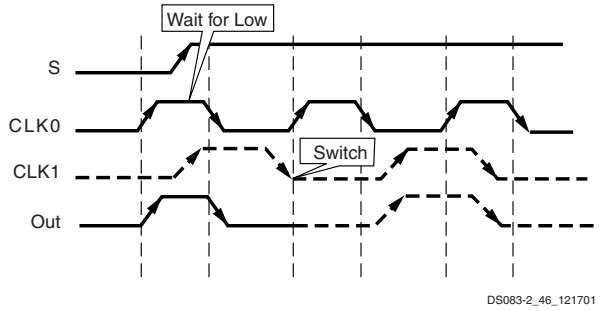


Figure 3-17: **BUFGMUX Waveform Diagram**

- The current clock is CLK0.
- S is activated High.
- If CLK0 is currently High, the multiplexer waits for CLK0 to go Low.
- Once CLK0 is Low, the multiplexer output stays Low until CLK1 transitions High to Low.
- When CLK1 transitions from High to Low, the output switches to CLK1.
- No glitches or short pulses can appear on the output.

Operation of the BUFGMUX_1 Circuit

If the presently selected clock is High while S changes, or if it goes High after S has changed, the output is kept High until the other ("to-be-selected") clock has made a transition from Low to High. At that instant, the new clock starts driving the output.

The two clock inputs can be asynchronous with regard to each other, and the S input can change at any time, except for a short setup time prior to the falling edge of the presently selected clock; that is, prior to the falling edge of the BUFGMUX output O. Violating this setup time requirement can result in an undefined runt pulse output.

Figure 3-18 shows a switch-over from CLK0 to CLK1.

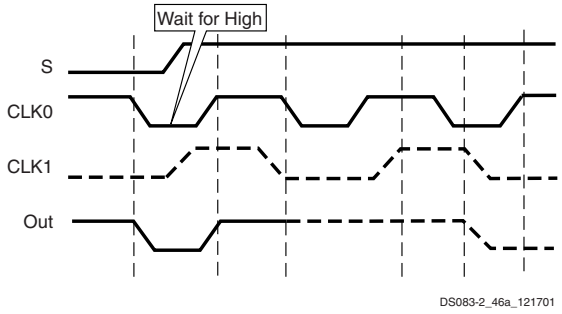


Figure 3-18: **BUFGMUX_1 Waveform Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 79 of 947

- The current clock is CLK0.
- S is activated High.
- If CLK0 is currently Low, the multiplexer waits for CLK0 to go High.
- Once CLK0 is High, the multiplexer output stays High until CLK1 transitions Low to High.
- When CLK1 transitions from Low to High, the output switches to CLK1.
- No glitches or short pulses can appear on the output.

Submodules

BUFGCE and BUFGCE_1

BUFGCE and BUFGCE_1 are submodules based on BUFGMUX and BUFGMUX_1, respectively. BUFGCE and BUFGCE_1 are global clock buffers incorporating a smart enable function that avoids output glitches or runt pulses. The select signal must meet the setup time for the clock.

BUFGCE is the preferred circuit for clocking on the rising edge, while BUFGCE_1 is preferred when clocking on the falling edge.

Operation of the BUFGCE Circuit

If the CE input (see Figure 3-19) is active (High) prior to the incoming rising clock edge, this Low-to-High-to-Low clock pulse passes through the clock buffer. Any level change of CE during the incoming clock High time has no effect.




Figure 3-19: **Virtex-II Pro BUFGCE or BUFGCE_1 Function**

If the CE input is inactive (Low) prior to the incoming rising clock edge, the following clock pulse does not pass through the clock buffer, and the output stays Low. Any level change of CE during the incoming clock High time has no effect. CE must not change during a short setup window just prior to the rising clock edge on the BUFGCE_1 input I. Violating this setup time requirement can result in an undefined runt pulse output.

This means the output stays Low when the clock is disabled, but it completes the clock-High pulse when the clock is being disabled, as shown in Figure 3-20.

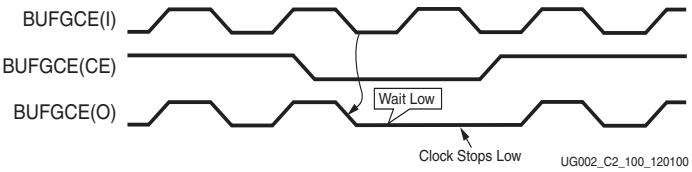


Figure 3-20: **BUFGCE Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 80 of 947

Operation of the BUFGCE_1 Circuit

If the CE input is active (High) prior to the incoming falling clock edge, this High-to-Low-to-High clock pulse passes through the clock buffer. Any level change of CE during the incoming clock Low time has no effect.

If the CE input is inactive (Low) prior to the incoming falling clock edge, the following clock pulse does not pass through the clock buffer, and the output stays High. Any level change of CE during the incoming clock Low time has no effect. CE must not change during a short setup window just prior to the falling clock edge on the BUFGCE input I. Violating this setup time requirement can result in an undefined runt pulse output.

This means the output stays High when the clock is disabled, but it completes the clock-Low pulse when the clock is being disabled, as shown in Figure 3-21.

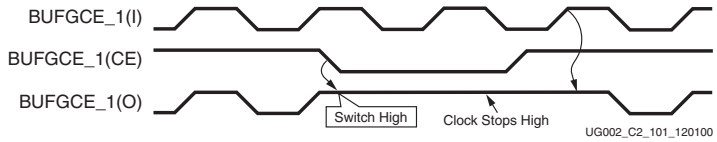


Figure 3-21: **BUFGCE_1 Waveforms**

When BUFGCE (or BUFGCE_1) is used with DCM outputs, a second BUFG can be used for clock feedback. Buffer sharing the inputs with BUFGCE is the preferred solution.

Summary

Table 3-7 shows the maximum resources available per Virtex-II Pro device.

Table 3-7: **Resources per Virtex-II Pro Device (from XC2VP2 to XC2VP125)**

Resource	Maximum Number
Single-ended IBUFG (pads)	16
Differential IBUFGDS (pairs)	8
BUFG (Global Clock Buffer)	16
BUFGCE (or BUFGCE_1)	8
BUFGMUX (or BUFGMUX_1)	8

Characteristics

The following are characteristics of global clocks in Virtex-II Pro devices:

- Low-skew clock distribution.
- Synchronous “glitch-free” multiplexer that avoids runt pulses. Switching between two asynchronous clock sources is usually considered unsafe, but it is safe with the Virtex-II Pro global clock multiplexer.
- Any level change on S must meet a setup time requirement with respect to the signal on the output O (rising edge for BUFGMUX, falling edge for BUFGMUX_1). Any level change on CE must meet a setup time requirement with respect to the signal on the Input I (rising edge for BUFGCE, falling edge for BUFGCE_1).
- Two BUFGMUX (or BUFGMUX_1) resources can be cascaded to create a 3 to 1 clock multiplexer.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 81 of 947

Location Constraints

BUFGMUX and BUFGMUX_1 (primitives) and IBUFG (IBUFGDS) instances can have LOC properties attached to them to constrain placement. The LOC properties use the following form to constrain a clock net:

```
INST  "clock_buffer_instance_name" LOC="BUFGMUX#P/S";
```

Each clock pad (or IBUFG) has a direct connection with a specific global clock multiplexer (input I0). A placement that does not conform to this rule causes the software to send a warning.

If the clock pad (or IBUFG) has LOC properties attached, the DCM allows place and route software maximum flexibility, as compared to a direct connection to the global clock buffer (BUFG).

Secondary Clock Network

If more clocks are required, the 24 horizontal and vertical long lines in Virtex-II Pro devices can be used to route additional clock nets. Skew is minimized by the place and route software, if the USELOWSKEWLINES constraint is attached to the net.

VHDL and Verilog Instantiation

VHDL and Verilog instantiation templates are available in the Libraries Guide for all submodules.

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

The following are templates for primitives:

- BUFGMUX_INST
- BUFGMUX_1_INST

The following are templates for submodules:

- BUFGCE_SUBM
- BUFGCE_1_SUBM

As examples, the BUFGMUX_INST.vhd, BUFGMUX_1_INST.vhd, BUFGCE_SUBM.vhd, and BUFGCE_1_SUBM.vhd VHDL templates are shown. In addition, the BUFGMUX_INST.v, BUFGMUX_1_INST.v, BUFGCE_1_SUBM.v, and BUFGCE_SUBM.v Verilog templates are shown.

VHDL Template

```
-- Module: BUFGMUX_INST
-- Description: VHDL instantiation template
-- Global Clock Multiplexer (Switch Low)
-- Device: Virtex-II Pro Family
------------------------------------------------------------------------
-- Component Declarations:
--
component BUFGMUX
  port (
  I0   : in std_logic;
        I1   : in std_logic;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 82 of 947

```
        S    : in std_logic;
        O    : out std_logic
  );
end component;
--
-- Architecture  section:
--
-- Global Clock Buffer Instantiation
U_BUFGMUX: BUFGMUX
  port map (
  I0     => , -- insert clock input used when select (S) is Low
  I1     => , -- insert clock input used when select (S) is High
  S      => , -- insert Mux-Select input
  O      =>   -- insert clock output
  );
--
-------------------------------------------------------------------
-- Module: BUFGMUX_1_INST
-- Description: VHDL instantiation template
--  Global Clock Multiplexer (Switch High)
--
-- Device: Virtex-II Pro Family
-------------------------------------------------------------------
-- Component Declarations:
component BUFGMUX_1
  port (
  I0   : in std_logic;
        I1   : in std_logic;
        S    : in std_logic;
        O    : out std_logic
  );
end component;
--
-- Architecture  section:
--
-- Global Clock Buffer Instantiation
U_BUFGMUX_1: BUFGMUX_1
  port map (
  I0     => , -- insert clock input used when select (S) is Low
  I1     => , -- insert clock input used when select (S) is High
  S      => , -- insert Mux-Select input
  O      =>   -- insert clock output
  );
--
-------------------------------------------------------------------
-- Module: BUFGCE_SUBM
-- Description: VHDL instantiation template
-- Global Clock Buffer with Clock Enable:
-- Input Clock Buffer to BUFGMUX - Clock disabled = Low
-- Device: Virtex-II Pro Family
-------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;
--
-- pragma translate_off
library UNISIM;
use UNISIM.VCOMPONENTS.ALL;
-- pragma translate_on
--
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 83 of 947

```
entity BUFGCE_SUBM is
  port (
        I:  in std_logic;
        CE: in std_logic;
        O:  out std_logic
       );
end BUFGCE_SUBM;
--
architecture BUFGCE_SUBM_arch of BUFGCE_SUBM is
--
-- Component Declarations:
component BUFGMUX
  port (
  I0   : in std_logic;
        I1   : in std_logic;
        S    : in std_logic;
        O    : out std_logic
  );
end component;
--
-- signal declarations
signal GND : std_logic;
signal CE_B : std_logic;
--
begin
GND <= '0';
--
CE_B <= not CE;
--
-- Global Clock Buffer Instantiation
U_BUFGMUX: BUFGMUX
  port map (
  I0     => I,
  I1     => GND,
  S      => CE_B,
  O      => O
  );
--
end BUFGCE_SUBM_arch;
-----------------------------------------------------------------------
-- Module: BUFGCE_1_SUBM
-- Description: VHDL instantiation template
-- Global Clock Buffer with Clock Enable:
-- Input Clock Buffer to BUFGMUX_1 - Clock disabled = High
-- Device: Virtex-II Pro Family
-----------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;
--
-- pragma translate_off
library UNISIM;
use UNISIM.VCOMPONENTS.ALL;
-- pragma translate_on
--
entity BUFGCE_1_SUBM is
  port (
        I:  in std_logic;
        CE: in std_logic;
        O:  out std_logic
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 84 of 947

```
      );
end BUFGCE_1_SUBM;
--
architecture BUFGCE_1_SUBM_arch of BUFGCE_1_SUBM is
--
-- Component Declarations:
component BUFGMUX_1
  port (
  I0   : in std_logic;
        I1   : in std_logic;
        S    : in std_logic;
        O    : out std_logic
  );
end component;
--
-- signal declarations
signal VCC : std_logic;
--
signal CE_B : std_logic;
--
begin
VCC <= '1';
--
CE_B <= not CE;
--
-- Global Clock Buffer Instantiation
U_BUFGMUX_1: BUFGMUX_1
  port map (
  I0     => I,
  I1     => VCC,
  S      => CE_B,
  O      => O
  );
--
end BUFGCE_1_SUBM_arch;
```

Verilog Template

```
//------------------------------------------------------------------------
// Module:      BUFGMUX_INST
// Description: Verilog Instantiation Template
// Global Clock Multiplexer (Switch Low)
//
//
// Device: Virtex-II Pro Family
//------------------------------------------------------------------------
//
//BUFGMUX Instantiation
BUFGMUX  U_BUFGMUX
             (.I0(),  // insert clock input used when select(S) is Low
              .I1(),  // insert clock input used when select(S) is High
               .S(),   // insert Mux-Select input
               .O()    // insert clock output
              );
//------------------------------------------------------------------------
// Module:      BUFGMUX_1_INST
// Description: Verilog Instantiation Template
// Global Clock Multiplexer (Switch High)
//
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 85 of 947

```
//
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------
//
//BUFGMUX_1 Instantiation
BUFGMUX_1  U_BUFGMUX_1
             (.I0(),  // insert clock input used when select(S) is Low
              .I1(),  // insert clock input used when select(S) is High
               .S(),   // insert Mux-Select input
               .O()    // insert clock output
              );
//-----------------------------------------------------------------------
// Module:      BUFGCE_SUBM
// Description: Verilog Submodule
// Global Clock Buffer with Clock Enable:
//  Input Clock Buffer to BUFGMUX - Clock disabled = Low
//
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------
module BUFGCE_SUBM (I,
                    CE,
                    O);
input   I,
        CE;

output  O;

wire GND;

assign GND = 1'b0;

BUFGMUX U_BUFGMUX
             (.I0(I),
              .I1(GND),
              .S(~CE),
              .O(O)
             );
//
endmodule
//-----------------------------------------------------------------------
// Module: BUFGCE_1_SUBM
// Description: Verilog Submodule
// Global Clock Buffer with Clock Enable:
// Input Clock Buffer to BUFGMUX_1 - Clock disabled = High
//
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------

module BUFGCE_1_SUBM (I,
                      CE,
                      O);
input   I,
        CE;

output  O;

wire VCC;

assign VCC = 1'b1;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 86 of 947

```
BUFGMUX_1 U_BUFGMUX_1
             (.I0(I),
              .I1(VCC),
              .S(~CE),
              .O(O)
             );
//
endmodule
```

Digital Clock Managers (DCMs)

Overview

Virtex-II Pro devices have four to twelve DCMs, and each DCM provides a wide range of powerful clock management features:

- **Clock De-Skew**: The DCM contains a delay-locked loop (DLL) that can completely eliminate clock distribution delays, hence deskewing the DCM's output clocks with respect to the input clock. The DLL contains delay elements (individual small buffers) and control logic. The incoming clock drives a chain of delay elements, thus the output of every delay element represents a version of the incoming clock delayed at a different point.

  The control logic contains a phase detector and a delay line selector. The phase detector compares the incoming clock signal(CLKIN) against a feedback input (CLKFB) and steers the delay line selector, essentially adding delay to the output of DCM until the CLKIN and CLKFB coincide.

- **Frequency Synthesis**: Separate outputs provide a doubled frequency (CLK2X and CLK2X180). Another output (CLKDV) provides a frequency that is a specified fraction of the input frequency (÷1.5, ÷2, ÷2.5, and so forth, up to ÷15 and ÷16.)

  Two other outputs (CLKFX and CLKFX180) provide an output frequency that is derived from the input clock by simultaneous frequency division and multiplication. The user can specify any integer multiplier (M) and divisor (D) within the range specified in the DCM Timing Parameters section of the Virtex-II Pro Data Sheet. An internal calculator figures out the appropriate tap selection, so that the output edge coincides with the input clock whenever that is mathematically possible. For example, M=9 and D=5, multiply the frequency by 1.8, and the output rising edge is coincident with the input rising edge every 5 input periods = every 9 output periods.

- **Phase Shifting**: Three outputs drive the same frequency as CLK0 but are delayed by 1/4, 1/2, and 3/4 of a clock period. An additional control optionally shifts all nine clock outputs by a fixed fraction of the clock period (defined during configuration, and described in multiples of the clock period divided by 256).

  The user can also dynamically and repetitively move the phase forwards or backwards by one unit of the clock period divided by 256. Note that any such phase shift is always invoked as a specific fraction of the clock period, but is always implemented by moving delay taps with a resolution of DCM_TAP (see the DCM Timing Parameters section in the Virtex-II Pro Data Sheet).

- **General Control Signals**: The input is an asynchronous reset; when High, it resets the entire DCM (all clock outputs, LOCKED, and STATUS signals are brought LOW). The LOCKED output is High when all enabled DCM circuits have locked. The active High STATUS outputs indicate the following:

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 87/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 87 of 947

- Phase Shift Overflow (STATUS[0])
- CLKIN Stopped (STATUS[1])
- CLKFX Stopped (STATUS[2])

When using DCMs it is important to observe the V_{CCAUX} recommended operating noise specification in the Virtex-II Pro Data Sheet. Power distribution design details are available in Xilinx Application Note XAPP623.

Clock De-Skew

The Virtex-II Pro Digital Clock Manager (DCM) offers a fully digital, dedicated on-chip de-skew circuit providing zero propagation delay, low clock skew between output clock signals distributed throughout the device, and advanced clock domain control. These features can be used to implement several circuits that improve and simplify system level design.

Any four of the nine outputs of the DCM can be used to drive a global clock network. All DCM outputs can drive general interconnect at the same time; for example, DCM output can be used to generate board-level clocks. The well-buffered global clock distribution network minimizes clock skew caused by loading differences. By monitoring a sample of the output clock (CLK0 or CLK2X), the de-skew circuit compensates for the delay on the routing network, effectively eliminating the delay from the external input port to the individual clock loads within the device.

Figure 3-22 shows all of the inputs and outputs relevant to the DCM de-skew feature.

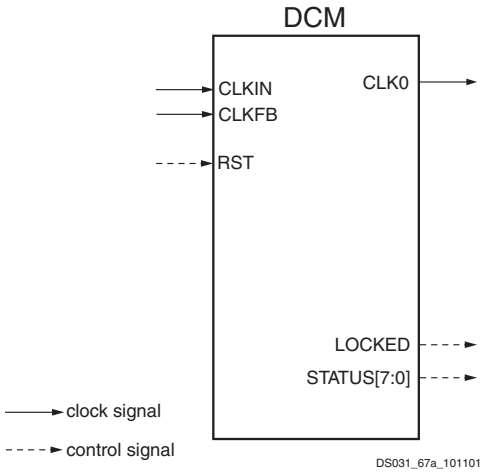


Figure 3-22: **Clock De-Skew Outputs**

The de-skew feature can also act as a clock mirror. By driving the CLK0 or CLK2X output off-chip and then back in again, the de-skew feature can be used to de-skew a board-level clock serving multiple devices. Figure 3-23 shows an example.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 88 of 947

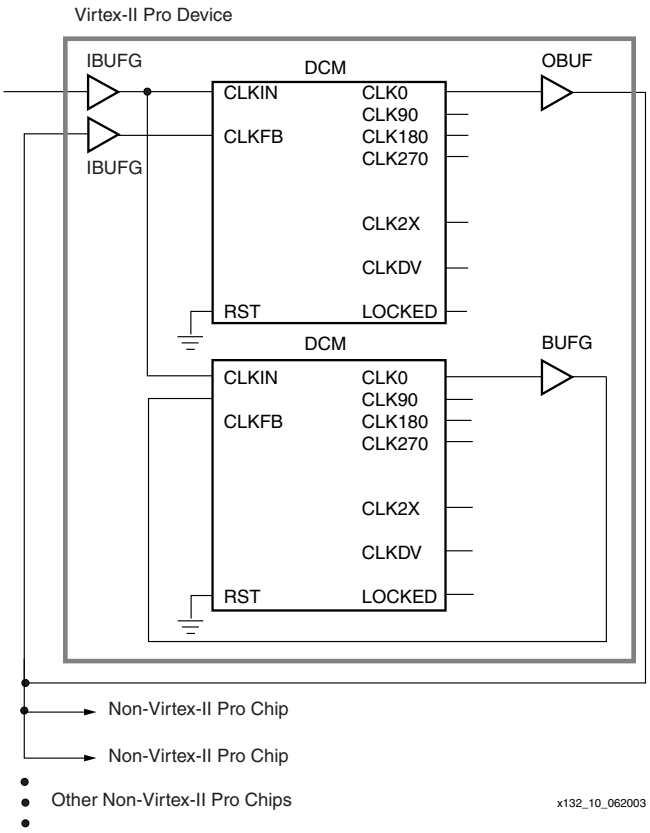


Figure 3-23: **Using De-Skew as a Clock Mirror**

By taking advantage of the de-skew circuit to remove on-chip clock delay, the designer can greatly simplify and improve system level design involving high-fanout, high-performance clocks.

Operation

A de-skew circuit in its simplest form consists of variable delay line and control logic. The delay line produces a delayed version of the input clock (CLKIN). The clock distribution network routes the clock to all internal registers and to the clock feedback CLKFB pin. The control logic samples the input clock, as well as the feedback clock, and adjusts the delay line.

For optimum performance, the Virtex-II Pro DCM uses a discrete digital delay line, which is a series of buffer elements each with an intrinsic delay of less than DCM_TAP (see AC Characteristics in the Virtex-II Pro Data Sheet).

A de-skew circuit works by inserting delay between the input clock and the feedback clock until the two rising edges align, putting the two clocks 360 degrees out of phase, which means they are in phase. When the edges from the input clock line up with the edges from the feedback clock, the DCM achieves "lock." The two clocks have no discernible

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 89/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 89 of 947

difference. Thus, the DCM output clock compensates for the delay in the clock distribution network, effectively removing the delay between the source clock and its loads.

Input Clock Requirements

The clock input of the DCM can be driven either by an IBUFG, an IBUF, or a BUFGMUX. An LVDS clock can also be used as input.

The output clock signal of a DCM, essentially a delayed version of the input clock signal, reflects any instability on the input clock in the output waveform. A DCM cannot improve the input jitter. The DCM input clock requirements are specified in the Virtex-II Pro Data Sheet.

Once locked, the DCM can tolerate input clock period variations of up to the value specified by CLKIN_PER_JITT_DLL_HF (at high frequencies) or CLKIN_PER_JITT_DLL_LF (at low frequencies). Larger frequency changes can cause the DCM to lose lock, which is indicated by the LOCKED output going low. The user must then reset the DCM. The cycle-to-cycle input jitter must be kept to less than CLKIN_CYC_JITT_DLL_LF in the low frequencies and CLKIN_CYC_JITT_DLL_HF for the high frequencies.

Input Clock Changes

Changing the period of the input clock beyond the maximum input period jitter specification requires a manual reset of the DCM. Failure to reset the DCM produces an unreliable lock signal and output clock.

While the DCM is in the locking process, no input clock edge can be missing. Once locked, it is possible to temporarily stop the input clock with little impact to the de-skew circuit, as long as CLKFX or CLKFX180 is not used.

If the input clock is stopped and CLKFX or CLKFX180 is used, the CLKFX or CLKFX180 outputs might stop toggling, and STATUS[2] ("CLKFX Stopped") is asserted. The DCM must be reset to recover from this event.

CLKFX or CLKFX180 stops within D cycles of CLKIN or when CLKFX is concurrent to CLKIN. STATUS[2] is asserted within 1 to D CLKIN + 1 CLKFX cycles of CLKFX or when CLKFX180 output stops. (D is the CLKFX_DIVIDE value.)

In any other cases, the clock should not be stopped for more than 100 ms to minimize the effect of device cooling; otherwise, the tap delays might change. The clock should be stopped during a Low or a High phase, and must be restored with the same input clock period/frequency. During this time, LOCKED stays High and remains High when the clock is restored. Thus, a High on LOCKED does not necessarily mean that a valid clock is available.

When the input clock is being stopped (CLKIN remains High or Low for more than 1 clock cycle), one to eight more output clock cycles are still generated as the delay line is flushed. When the output clock stops, the CLKIN stopped (STATUS(1)) signal is asserted. When the clock is restarted, the output clock cycles are not generated for one to eight clocks while the delay line is filled. Similarly, the STATUS(1) signal is deasserted once the output clock is generated. The most common case is two or three clocks. In a similar manner, a phase shift of the input clock is possible. For example, the input clock can be stopped for 12 ns to achieve a 12 ns phase shift at the output. The phase shift propagates one to eight clocks to the output after the original shift, with no disruption to the DCM control. The STATUS(1) is forced Low whenever LOCKED is Low. .

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 90 of 947

Output Clocks

Some restrictions apply regarding the connectivity of the output pins. The DCM clock outputs can each drive an OBUF, a global clock buffer BUFGMUX, or they can route directly to the clock input of a synchronous element. To use the dedicated routing, the DCM clock outputs should drive BUFGMUXs that are on the same edge (top or bottom) of the device. If the DCM and BUFGMUX are not on the same edge, local routing is used and the DCM might not deskew properly.

Do not use the DCM output clock signals until after activation of the LOCKED signal. Prior to the activation of the LOCKED signal, the DCM output clocks are not valid and can exhibit glitches, spikes, or other spurious movement.

External Feedback

To ensure consistent locking, if a DCM is configured with external feedback, applying a reset after configuration is strongly recommended.

For an optimum locking process, a DCM configured with external feedback requires both CLKIN and CLK0 to be present and stable when the DCM begins to lock. During configuration with external feedback, it is not possible to provide CLKFB in the beginning of the locking process. At the end of configuration, the DCM begins to lock once the device enters the startup sequence. Because a global 3-state signal (GTS) is still asserted during this time, the output I/O pins remain in a 3-state condition, effectively putting the CLKFB signal into a 3-state condition.

When CLKFB eventually appears (after the GTS is deasserted), the DCM proceeds with the lock. However, it might not lock at the optimal point and can introduce slightly more jitter (as well as greater clock cycle latency) through the DCM.

In addition, if CLKFB is coupling with another signal when it is put into a 3-state condition (a PCB signal integrity issue), the DCM might sense this invalid clock as CLKFB and use it to proceed with a lock. This second possibility can cause the DCM to not lock properly once the GTS deasserts and the true CLKFB signal is present.

Use of reset after configuration guarantees that the locking process starts with a valid CLKIN and CLKFB signal and ensures consistent locking.

Notes:

1. The default value is **-g LCK_cycle:NoWait** and **-g GTS_cycle:5**. When these settings are used, the startup sequence does not wait for the DCM to lock.
2. If the startup sequence is altered (for example, using the BitGen option), the **LCK_cycle** (wait for DCM to lock) must not be placed before the **GTS_cycle** (de-assert GTS); otherwise, the DCM never locks and configuration does not complete.
3. HDL example code to reset the DCM after configuration are shown below. This example requires that **GTS_cycle** be set before **GWE_cycle** in the BitGen options (the default). This ensures that the DCM is reset after the I/O pins are activated.

Verilog Example:

```
// DCM instantiation to show the reset connection

                        DCM u_dcm1 (.CLKIN(clkin),
                        .CLKFB(clkfb),
                        .CLK0(clk0),
                        .RST(rstin),
                        .LOCKED(locked));

                        // rstin connects to RST pin of DCM
                        assign rstin = (user_reset || config_rst);
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 91 of 947

```
                    // This is the actual reset circuit that outputs
config_rst. It is a four-cycle shift register.

                  FDS flop1 (.D(1'b0), .C(clkin), .Q(out1), .S(1'b0));
                      FD flop2 (.D(out1), .C(clkin), .Q(out2));
                      FD flop3 (.D(out2), .C(clkin), .Q(out3));
                      FD flop4 (.D(out3), .C(clkin), .Q(out4));

                    //config_rst will be asserted for 3 clock cycles.
                      assign config_rst = (out2 | out3 | out4);
```

VHDL Example:

```
-- DCM instantiation to show the reset connection

                      u_dcm1: DCM port map (
                      CLKIN => clkin,
                      CLKFB => clkfb,
                      CLK0 => clk0,
                      RST => rstin,
                      LOCKED => locked);

                      -- rstin connects to RST pin of DCM
                      rstin <= user_reset or config_rst;

                     -- This is the actual reset circuit that outputs
config_rst. It is a four-cycle shift register.

                      flop1: FDS port map (D => '0', C => clkin, Q =>
out1, S => '0');
                  flop2: FD port map (D => out1, C => clkin, Q => out2);
                  flop3: FD port map (D => out2, C => clkin, Q => out3);
                  flop4: FD port map (D => out3, C => clkin, Q => out4);

                    -- config_rst will be asserted for 3 clock cycles.
                      config_rst <= out2 or out3 or out4;
```

Characteristics of the De-Skew Circuit

- Can eliminate clock distribution delay by effectively adding one clock period delay. Clocks are de-skewed to within CLKOUT_PHASE, specified in the Virtex-II Pro Data Sheet.
- Can be used to eliminate on-chip as well as off-chip clock delay.
- Has no restrictions on the delay in the feedback clock path.
- Requires a continuously running input clock.
- Adapts to a wide range of frequencies. However, once locked to a frequency, cannot tolerate large variations of the input frequency.
- De-skew circuit is part of the DCM, which also includes phase adjustment, frequency synthesis, and spread spectrum techniques that are described in this document.
- Does not eliminate jitter. The de-skew circuit output jitter is the sum of input jitter and some jitter value that the de-skew circuit might add.
- The completion of configuration can be delayed until after DCM locks to guarantee the system clock is established prior to initiating the device.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 92 of 947

Port Signals

Source Clock Input — CLKIN

The CLKIN pin provides the user source clock (the clock signal on which the de-skew circuit operates) to the DCM. The CLKIN frequency must fall in the ranges specified in the Virtex-II Pro Data Sheet. The clock input signal can be provided by one of the following:

IBUF — Input buffer

IBUFG — Global clock input buffer on the same edge of the device (top or bottom)

BUFGMUX — Internal global clock buffer

Note: When IBUF is used as the clock input, the PAD to DCM input skew is not compensated. Refer to Table 3-1, page 66 for more information.

Feedback Clock Input — CLKFB

A reference or feedback signal is required to delay-compensate the output. Connect only the CLK0 or CLK2X DCM outputs to the feedback clock input (CLKFB) pin to provide the necessary feedback to the DCM. The feedback clock input signal can be driven by an internal global clock buffer (BUFGMUX), one of the global clock input buffers (IBUFG) on the same edge of the device (top or bottom), or IBUF (the input buffer.) Note that when IBUF is used, the PAD to DCM input skew is not compensated.)

If an IBUFG sources the CLKFB pin of a DCM pin, the following special rules apply:

1. The CLK0 or CLK2X of the DCM must directly drive an OBUF or a BUFG-to-DDR configuration to forward the clock.
2. External to the FPGA, the same forwarded clock signal must be connected to the IBUFG (GCLK pin) that drives the CLKFB of the DCM.

Reset Input — RST

When the reset pin is activated, the LOCKED signal deactivates within four source clock cycles. The RST pin, active High, must be connected to a dynamic signal or tied to ground. For all designs that use the feedback feature of the DCM, applying a reset signal after configuration is strongly recommended for both production and ES device in order to ensure consistent locking. As the DCM delay taps reset to zero, glitches can occur on the DCM clock output pins. Activation of the RST pin can also severely affect the duty cycle of the clock output pins. Furthermore, the DCM output clocks no longer de-skew with respect to one another and are eventually stopped Low if Status signals are deactivated (brought to Low). For these reasons, use the reset pin only when reconfiguring the device or changing the input frequency. The reset input signal is asynchronous and should be held High for at least three clock cycles. The time it takes for the DCM to achieve lock is specified as LOCK_DLL (for DLL output) and LOCK_FX (for DFS output). The DCM locks faster at higher frequencies. See the LOCK_DLL timing parameter in the Virtex-II Pro Data Sheet.

Locked Output — LOCKED

In order to achieve lock, the DCM may need to sample several thousand clock cycles. After the DCM achieves lock, the LOCKED signal goes High. The DCM timing parameters section of the Virtex-II Pro Data Sheet provides estimates for locking times.

To guarantee that the system clock is established prior to the device "waking up," the DCM can delay the completion of the device configuration process until after the DCM locks. The STARTUP_WAIT attribute activates this feature.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 93 of 947

Until the LOCKED signal activates, the DCM output clocks are not valid and can exhibit glitches, spikes, or other spurious movement. In particular, the CLK2X output appears as a 1x clock with a 25/75 duty cycle.

Status - STATUS

The STATUS output is an 8-bit output, of which STATUS[1] reveals the loss of the input clock, CLKIN to the DCM.

Attributes

The following attributes provide access to some of the Virtex-II Pro series de-skew features, (for example, clock division and duty cycle correction).

Frequency Mode

The de-skew feature of the DCM is achieved with a delay-locked loop (DLL). This attribute specifies either the high or low-frequency mode of the DLL. The default is low-frequency mode. In high-frequency mode, the only outputs available from the DLL are the CLK0, CLK180, CLKDV, and LOCKED. (CLK90, CLK270, CLK2X, and CLK2X180 are not available in high-frequency mode.) The frequency ranges for both frequency modes are specified in the Virtex-II Pro Data Sheet. To set the DLL to high-frequency mode, attach the DLL_FREQUENCY_MODE=HIGH attribute in the source code or schematic.

Feedback Input

This attribute specifies the feedback input to the DCM (CLK0, or CLK2x). CLK0 is the default feedback. When both the CLK0 and the CLK2x outputs are used internally or externally to the device, the feedback input can be either the CLK0 or CLK2x. In order to set the feedback to CLK2X, attach the CLK_FEEDBACK=2X attribute in the source code or schematic.

Duty Cycle Correction

The 1x clock outputs, CLK0, CLK90, CLK180, and CLK270, use the duty cycle corrected default such that they exhibit a 50/50 duty cycle. The DUTY_CYCLE_CORRECTION attribute (by default TRUE) controls this feature.

Setting DUTY_CYCLE_CORRECTION=FALSE dectivates duty cycle correction for the DCM outputs listed above. It is strongly recommended to always set the DUTY_CYCLE_CORRECTION attribute to TRUE (default value). Note that setting this attribute to FALSE does not necessarily produce output clocks with the same duty cycle as the source clock.

Startup Delay

The default value of the STARTUP_WAIT attribute is FALSE. When STARTUP_WAIT is set to TRUE, and the LCK_cycle BitGen option is used, then the configuration startup sequence waits in the specified cycle until the DCM locks. For details, see Chapter 4, "Configuration" and Appendix A, "BitGen and PROMGen Switches and Options."

Legacy Support

The Virtex/Virtex-E library primitives/sub modules are supported in Virtex-II Pro for legacy purposes. The following are supported primitives/submodules:

- CLKDLL

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 94 of 947

- CLKDLLE
- CLKDLLHF
- BUFGDLL

Library Primitive

Only a single library primitive is available for the DLL, a part of the DCM. It is labeled the 'DCM' primitive.

Submodules

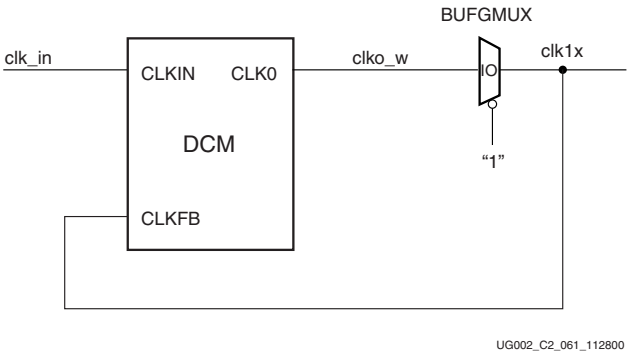


Figure 3-24: **BUFG_CLK0_SUBM**

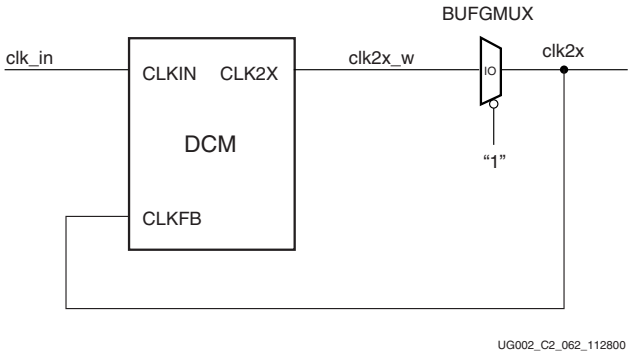


Figure 3-25: **BUFG_CLK2X_SUBM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 95/947

Ex. 1012
CISCO SYSTEMS, INC. / Page 95 of 947

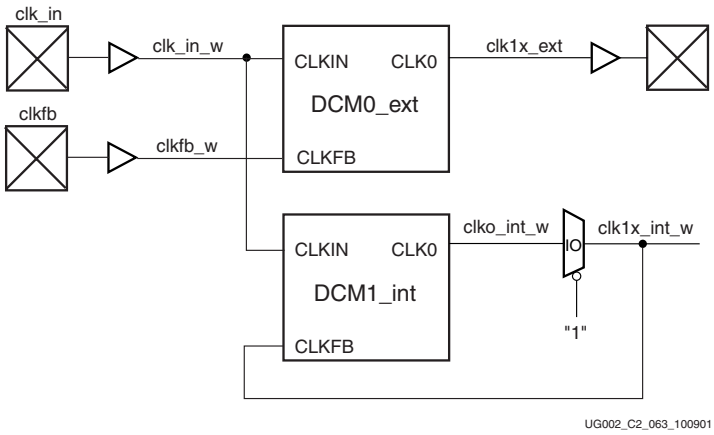


Figure 3-26: **BUFG_CLK0_FB_SUBM**

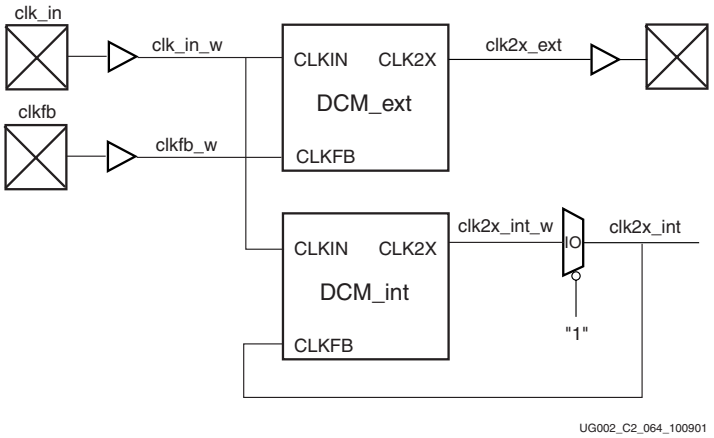


Figure 3-27: **BUFG_CLK2X_FB_SUBM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 96 of 947

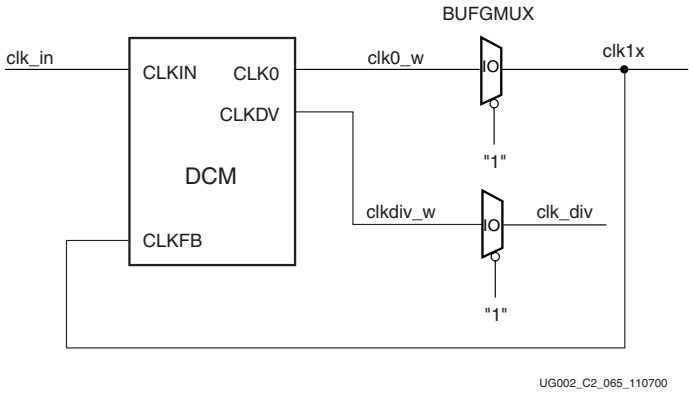


Figure 3-28: **BUFG_CLKDV_SUBM**

Frequency Synthesis

The DCM provides several flexible methods for generating new clock frequencies. Each method has a different operating frequency range and different AC characteristics. The CLK2X and CLK2X180 outputs double the clock frequency. The CLKDV output provides divided output clocks with division options of 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 9, 10, 11, 12, 13, 14, 15, and 16.

The DCM also offers a fully digital, dedicated Frequency Synthesizer output (CLKFX) and its opposite phase (CLKFX180). The output frequency can be any function of the input clock frequency described by M ÷ D, where M is the multiplier (numerator) and D is the divisor (denominator).

The two counter-phase frequency synthesized outputs can drive global clock routing networks within the device. The well-buffered global clock distribution network minimizes clock skew due to differences in distance or loading. See Figure 3-29.

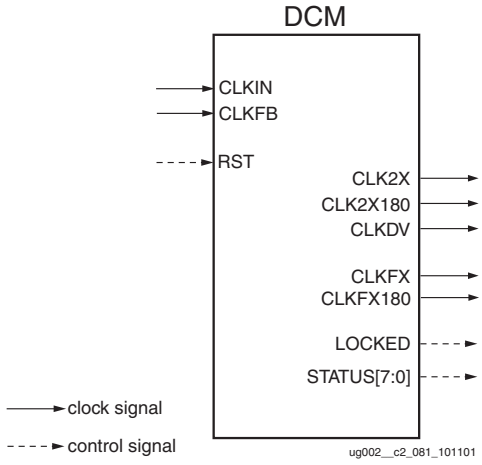


Figure 3-29: **Frequency Synthesis Outputs**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 97/947
Ex. 1012
CISCO SYSTEMS, INC. / Page 97 of 947

Operation

The DCM clock output CLKFX is any M/D product of the clock input to the DCM. Specifications for M and D, as well as input and output frequency ranges for the frequency synthesizer, are provided in the Virtex-II Pro Data Sheet. The frequency synthesizer output is phase aligned to the clock output, CLK0, only if feedback is provided to the CLKFB input of the DCM.

The internal operation of the frequency synthesizer is complex and beyond the scope of this document. The frequency synthesizer multiplies the incoming frequencies by the pre-calculated quotient M/D and generates the correct output frequencies as long as it is within the range specified in the Virtex-II Pro Data Sheet.

For example, assume input frequency = 50 MHz, M = 25, and D = 8 (note that M and D values have no common factors and hence cannot be reduced). The output frequency is correctly 156.25 MHz, although 25 x 50 MHz = 1.25 GHz and 50 MHz / 8 = 6.25 MHz, and both of these values are far outside the range of the input frequency.

Frequency Synthesizer Characteristics

- The frequency synthesizer provides an output frequency equal to the input frequency multiplied by M and divided by D.
- The outputs CLKFX and CLKFX180 always have a 50/50 duty-cycle.
- Smaller M and D values achieve faster lock times. The user should divide M and D by the largest common factor.
- The outputs are phase aligned with CLK0 when CLKFB is connected.

Port Signals

Source Clock Input — CLKIN

The CLKIN pin provides the user source clock to the DCM. The CLKIN frequency must fall in the ranges specified in the Virtex-II Pro Data Sheet. The clock input signal can be provided by one of the following:

- IBUF — Input buffer
- IBUFG — Global clock input buffer
- BUFGMUX — Internal global clock buffer

Note: When IBUF is used as the clock input, the PAD to DCM input skew is not compensated. Refer to Table 3-1, page 66 for more information.

2x Clock Output — CLK2X

The CLK2X output provides a frequency-doubled clock with an automatic 50/50 duty-cycle correction. This output is not available in high-frequency mode.

Until the DCM has achieved lock, the CLK2X output appears as a 1x version of the input clock with a 25/75 duty cycle. This behavior allows the DCM to lock on the correct edge with respect to source clock.

Clock Divide Output — CLKDV

The clock divide output pin CLKDV provides a lower frequency version of the source clock. The CLKDV_DIVIDE property controls CLKDV such that the source clock is divided by N where N is either 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 9, 10, 11, 12, 13, 14, 15, or 16.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 98 of 947

This feature provides automatic duty cycle correction such that the CLKDV output pin has a 50/50 duty cycle always in low-frequency mode, as well as for all integer values of the division factor N in high-frequency mode.

Frequency Synthesized Clock Output - CLKFX

The CLKFX output provides a frequency-synthesized clock (M/D * CLKIN) with a 50/50 duty cycle. For the CLKFX output to be phase-aligned with CLKIN, the clock feedback (CLK0) must be provided at the CLKFB input. With M and D adjusted such that they have no common factor, the alignment occurs only once every D input clock cycles.

Frequency Synthesized Clock Output 180° Phase Shifted - CLKFX180

The CLKFX180 output is a 180° phase shifted version of the CLKFX clock output, also with a 50/50 duty cycle.

Locked Output — LOCKED

The LOCKED signal is activated after the DCM has achieved the parameter values set by the user parameters. To guarantee that the system clock is established prior to the device "waking up," the DCM can delay the completion of the device configuration process until after the DCM locks. The STARTUP_WAIT attribute activates this feature. Until the LOCKED signal activates, the DCM output clocks are not valid and can exhibit glitches, spikes, or other spurious signals.

Reset Input — RST

When the reset pin activates, the LOCKED signal deactivates within four source clock cycles. The M and D values at configuration are maintained after the reset. The RST pin, active High, must either connect to a dynamic signal or be tied to ground. Activation of the RST pin can also severely affect the duty cycle of the clock output pins. For this reason, activate the reset pin only when reconfiguring the device or changing the input frequency. The reset input signal is asynchronous and should be held High for at least 2 ns.

Status - STATUS

The STATUS output is an 8-bit output:

- STATUS[1] indicates the loss of the input clock, CLKIN, only when CLKFB is connected.
- STATUS[2] indicates loss of CLKFX and CLKFX180 even though LOCKED might still be High. Note that this "CLKFX stopped" status functions only when CLKIN is present.

Attributes

The following attributes provide access to some of the Virtex-II Pro series frequency synthesis features, (for example, clock multiplication, clock division).

Clock Divide

The CLKDV_DIVIDE attribute specifies how the signal on the CLKDV pin is frequency divided with respect to the CLK0 pin. The values allowed for this attribute are 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 9, 10, 11, 12, 13, 14, 15, or 16; the default value is 2.

Frequency Mode for Frequency Synthesis

This attribute specifies either the high or low-frequency mode of the frequency synthesizer. The default is low-frequency mode. The frequency ranges for both frequency modes are specified in the Virtex-II Pro Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 99 of 947

To set the frequency synthesizer to high-frequency mode, attach the DFS_FREQUENCY_MODE=HIGH attribute in the source code or schematic.

Multiply/Divide Attribute

The M and D values can be set using the CLKFX_MULTIPLY and the CLKFX_DIVIDE attributes. The default settings are M = 4 and D = 1.

Startup Delay

The default value of the STARTUP_WAIT attribute is FALSE. When STARTUP_WAIT is set to TRUE, and the LCK_cycle BitGen option is used, then the configuration startup sequence waits in the specified cycle until the DCM locks. For details, see Chapter 4, "Configuration" and Appendix A, "BitGen and PROMGen Switches and Options."

Submodules

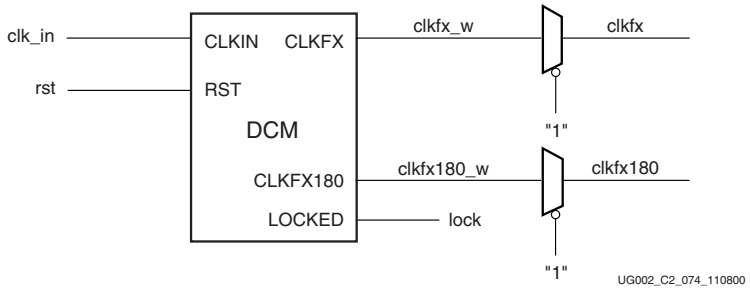


Figure 3-30: **BUFG_DFS_SUBM**

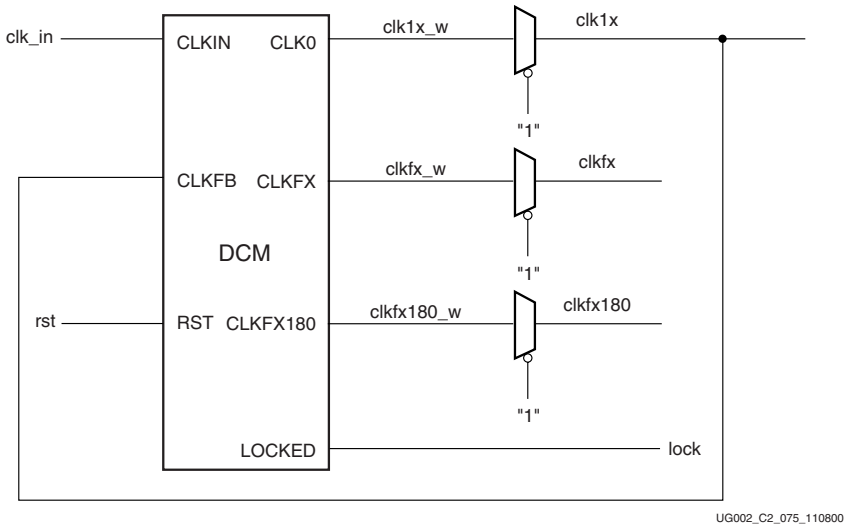


Figure 3-31: **BUFG_DFS_FB_SUBM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 100/94
Ex. 1012
CISCO SYSTEMS, INC. / Page 100 of 947

Phase Shifting

The DCM can also provide coarse and fine-grained phase shifting. The CLK0, CLK90, CLK180, and CLK270 outputs are each phase shifted by ¼ of the input clock period relative to each other, providing coarse phase control. Note that CLK90 and CLK270 are not available in high-frequency mode.

Operation

Figure 3-32 shows a block diagram of the DCM and all of the outputs affected by the circuitry of the phase shift feature.

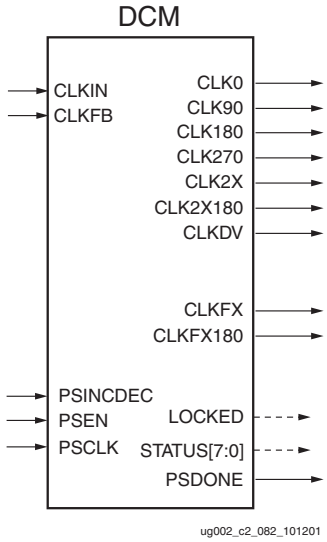


Figure 3-32: **Phase Shift Outputs**

Fine-phase adjustment affects all nine DCM output clocks. When activated, the phase shift between the rising edges of CLKIN and CLKFB is a specified fraction of the input clock period.

In variable mode, the PHASE_SHIFT value can also be dynamically incremented or decremented as determined by PSINCDEC synchronously to PSCLK, when the PSEN input is active. Figure 3-33 illustrates the effects of fine-phase shifting.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 101/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 101 of 947

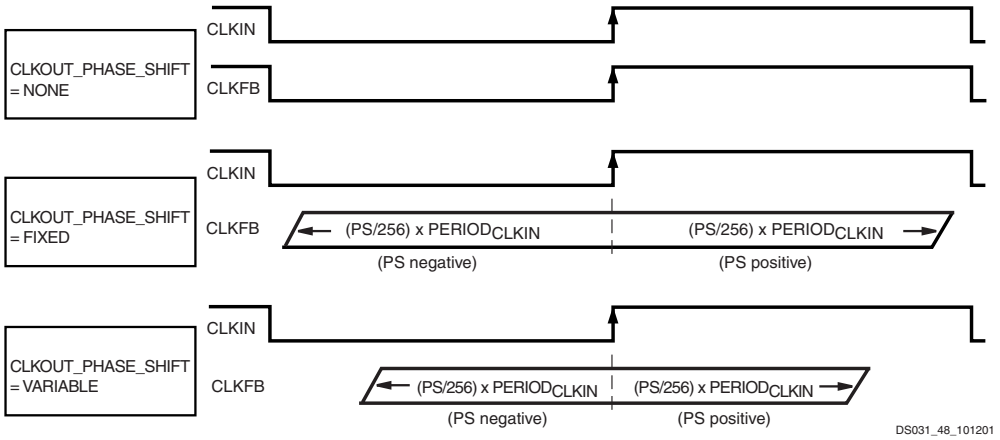


Figure 3-33: **Phase Shift Effects**

Two separate components of the phase shift range must be understood:

- PHASE_SHIFT attribute range
- FINE_SHIFT_RANGE DCM timing parameter range

The PHASE_SHIFT attribute is the numerator in the following equation:

Phase Shift (ns) = (PHASE_SHIFT/256) * $PERIOD_{CLKIN}$

The full range of this attribute is always -255 to +255, but its practical range varies with CLKIN frequency, as constrained by the FINE_SHIFT_RANGE component, which represents the total delay achievable by the phase shift delay line. Total delay is a function of the number of delay taps used in the circuit. Across process, voltage, and temperature, this absolute range is guaranteed to be as specified in the DCM Timing Parameters section of the Virtex-II Pro Data Sheet.

Absolute range (fixed mode) = ± FINE_SHIFT_RANGE

Absolute range (variable mode) = ± FINE_SHIFT_RANGE/2

The reason for the difference between fixed and variable modes is as follows. For variable mode to allow symmetric, dynamic sweeps from -255/256 to +255/256, the DCM sets the "zero phase skew" point as the middle of the delay line, thus dividing the total delay line range in half. In fixed mode, since the PHASE_SHIFT value never changes after configuration, the entire delay line is available for insertion into either the CLKIN or CLKFB path (to create either positive or negative skew).

Taking both of these components into consideration, the following are some usage examples:

- If $PERIOD_{CLKIN}$ = two times FINE_SHIFT_RANGE, then PHASE_SHIFT in fixed mode is limited to ± 128, and in variable mode it is limited to ± 64.
- If $PERIOD_{CLKIN}$ = FINE_SHIFT_RANGE, then PHASE_SHIFT in fixed mode is limited to ± 255, and in variable mode it is limited to ± 128.
- If $PERIOD_{CLKIN} \leq$ half of the FINE_SHIFT_RANGE, then PHASE_SHIFT is limited to ± 255 in either mode.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 102/94
Ex. 1012
CISCO SYSTEMS, INC. / Page 102 of 947

In variable mode, the phase factor can be changed by activating PSEN for one period of PSCLK. Increments or decrements to the phase factor can be made by setting the PSINCDEC pin to a High or Low, respectively. When the de-skew circuit has completed an increment or decrement operation, the signal PSDONE goes High for a single PSCLK cycle. This indicates to the user that the next change may be made.

The user interface and the physical implementation are different. The user interface describes the phase shift as a fraction of the clock period (N/256). The physical implementation adds the appropriate number of buffer stages (each DCM_TAP) to the clock delay. The DCM_TAP granularity limits the phase resolution at higher clock frequencies.

Phase Shift Characteristics

- Offers fine-phase adjustment with a resolution of ±1/256 of the clock period (or ± one DCM_TAP, whichever is greater) by configuration and also dynamically under user control.
- The phase shift settings affect all nine DCM outputs.
- V_{CC} and temperature do not affect the phase shift.

Fixed-Mode Phase Shifting

The use of negative, fixed-mode phase shifting with a Virtex-II DCM requires a minor modification to the clock muxing. Specifically, CLKIN must be used to drive CLKFB while the DCM is in reset (when the RST signal is held High or during the startup sequence after configuration). Figure 3-34 and the example Verilog and VHDL code below illustrate the implementation of this simple modification. This modification is NOT required for any positive phase shifting or for any variable-mode phase shifting.

Note that this requirement applies to any DCM using fixed-mode phase shifting, regardless of whether the RST of the DCM is connected to a user signal. RST must be held High for at least three clock cycles.

Solution 1: Clock-Muxing Modification

Figure 3-34 illustrates the clock-muxing modification.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 103 of 947

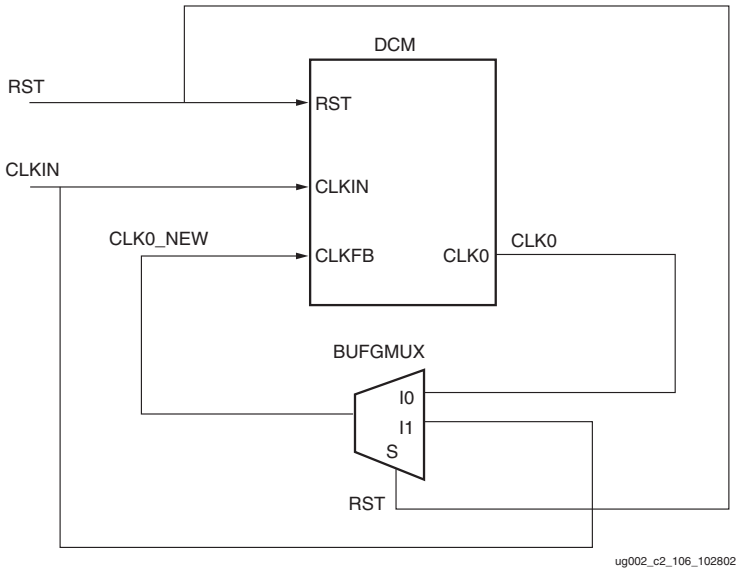


Figure 3-34: **Clock Muxing for Negative PHASE_SHIFT Value**

Note: PAR might report a warning that the IBUFG (CLKIN)-to-BUFGMUX connection is not an optimal connection and so does not use the fast connection between the two components. This warning can be safely ignored; in this case, a dedicated connection is not necessary for the IBUFG-BUFGMUX connection.

Verilog Example:

```
//DCM instantiation
DCM U_DCM ( .CLKIN(clkin), .CLKFB(clk0_new), .RST(rst), .CLK0(clk0),
.LOCKED(locked) );

//BUFGMUX instantiation
BUFGMUX U_BUFGMUX ( .O(clk0_new), .I0(clk0), .I1(clkin), .S(rst) );
```

VHDL Example:

```
-- DCM instantiation --
U_DCM: DCM port map ( CLKIN => clkin,
CLKFB => clk0_new,
DSSEN => '0',
PSCLK => '0',
PSINCDEC => '0',
RST => rst,
CLK0 => clk0,
LOCKED => locked);

-- BUFGMUX instantiation --
U_BUFGMUX: BUFGMUX( I0 => clk0
I1 => clkin,
O => clk0_new);
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 104 of 947

Solution 2: Alternative Workaround Using Positive Phase Shift

This problem can also be resolved by using an equivalent positive PHASE_SHIFT value. Given the current data sheet specification of FINE_SHIFT_RANGE = 10 ns, this restriction begins to have an effect for input frequencies below 100 MHz (input periods larger than 10 ns).

Given the equation:

Phase shift = (PS/256) * PeriodCLKIN

For a 10 ns input clock period:

Variable mode: -128 <= PS <= 128

Fixed mode: 0 <= PS <= 255 (full range)

For a 20 ns input clock period:

Variable mode: -64 <= PS <= 64

Fixed mode: 0 <= PS <= 128

For a 40 ns input clock period:

Variable mode: -32 <= PS <= 32

Fixed mode: 0 <= PS <= 64

In either fixed or variable mode, the range can be extended by choosing CLK90, CLK180, or CLK270, rather than CLK0, choosing CLK2X180 rather than CLK2X, or choosing CLKFX180 rather than CLKFX. Even at 25 MHz (40 ns period), the fixed mode coupled with these CLK* phases allows shifting throughout the entire input clock period range. See Figure 3-35.

Furthermore, the phase-shifting (DPS) function in the DCM requires the CLKFB for delay adjustment.

Because CLKFB must be from CLK0 or CLK2X, the DLL output is used. Hence the minimum CLKIN frequency for the DPS function is 24 MHz.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 105 of 947

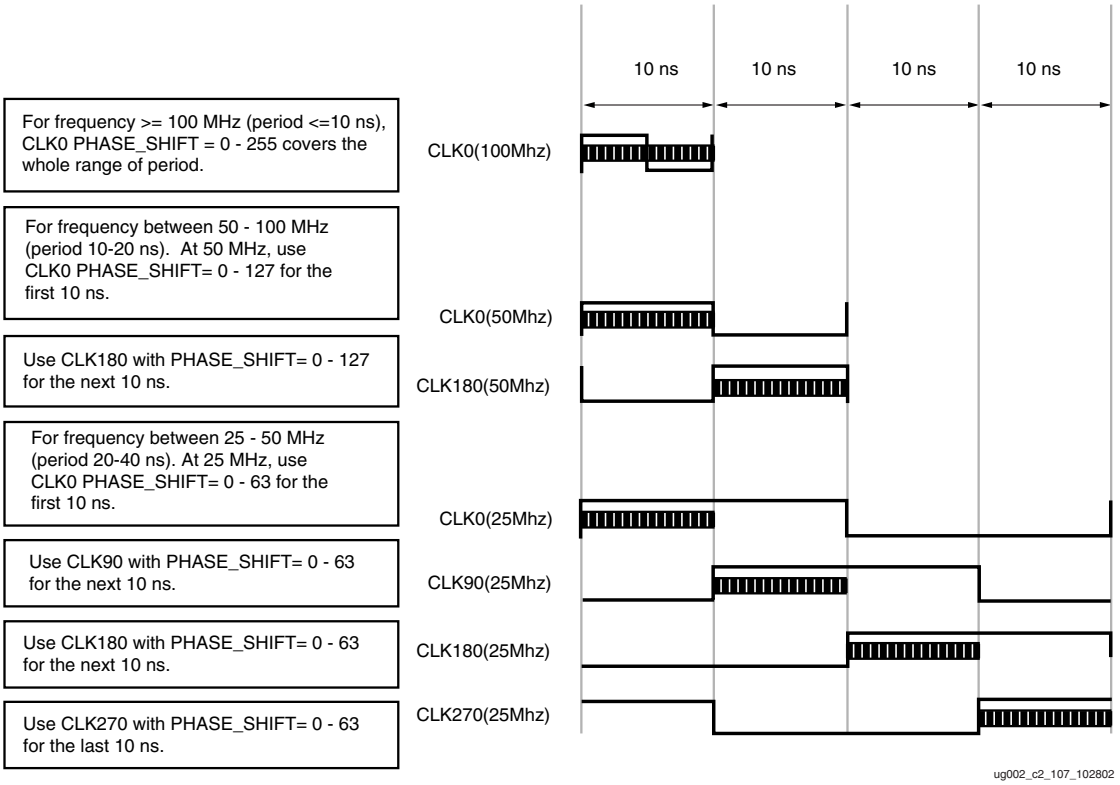


Figure 3-35: **Fixed Phase Shift Example**

Solution 3: Alternative Workaround Using Variable Phase Shift

Configure the DCM with variable phase shifting, as follows:

1. Set the CLK_OUT_PHASE_SHIFT attribute to VARIABLE.
2. Set the PHASE_SHIFT attribute to the required value (a negative value is acceptable).
3. Connect PSCLK to a clock signal.
4. Connect PSEN to Ground if incrementing or decrementing the phase shift is not intended.
5. Connect PSINCDEC to a signal, GND, or VCC.

Port Signals

1x Clock Outputs — CLK[0|90|180|270]

The 1x clock output pin CLK0 represents a delay-compensated version of the source clock (CLKIN) signal. In low-frequency mode, the DCM provides three phase-shifted versions of the CLK0 signal (CLK90, CLK180, and CLK270), whereas in high-frequency mode, only the 180 phase-shifted version is provided. All four (including CLK0) of the phase shifted outputs can be used simultaneously in low-frequency mode. The relationship between

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 106/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 106 of 947

phase shift and the corresponding period shift appears in Table 3-8. The timing diagrams in Figure 3-36 illustrate the DLL clock output characteristics.

Table 3-8: **Relationship of Phase-Shifted Output Clock to Period Shift**

Phase (degrees)	% Period Shift
0	0%
90	25%
180	50%
270	75%

By default, the DCM provides a 50/50 duty cycle correction on all 1x clock outputs. The DUTY_CYCLE_CORRECTION attribute (TRUE by default), controls this feature. Attach the DUTY_CYCLE_CORRECTION=FALSE property to the DCM symbol in order to deactivate the DCM duty cycle correction. With duty cycle correction deactivated, the output clocks have the same duty cycle as the source clock.

The DCM clock outputs can drive an OBUF, a BUFGMUX, or they can route directly to the clock input of a synchronous element.

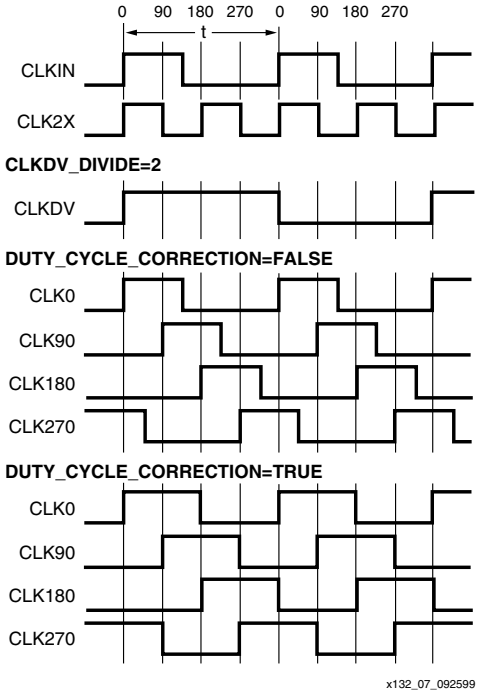


Figure 3-36: **DLL Output Characteristics**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 107 of 947

Source Clock Input — CLKIN

The CLKIN pin provides the user source clock to the DCM. The CLKIN frequency must fall in the ranges specified in the Virtex-II Pro Data Sheet. The clock input signal can be provided by one of the following:

- IBUF — Input buffer
- IBUFG — Global clock input buffer
- BUFGMUX — Internal global clock buffer

Note: When IBUF is used as the clock input, the PAD to DCM input skew is not compensated. Refer to Table 3-1, page 66 for more information.

Feedback Clock Input — CLKFB

A DCM requires a reference or feedback signal to provide delay-compensated output. Connect only the CLK0 or CLK2X DCM outputs to the feedback clock input (CLKFB) pin to provide the necessary feedback to the DCM. The feedback clock input signal can be driven by an internal global clock buffer (BUFGMUX), one of the global clock input buffers (IBUFG) on the same edge of the device (top or bottom), or IBUF (the input buffer.)

If an IBUFG sources the CLKFB pin, the following special rules apply:

1. The CLK0 or CLK2X of the DCM must directly drive an OBUF or a BUFG-to-DDR configuration to forward the clock.
2. External to the FPGA, the same forwarded clock signal must be connected to the IBUFG (GCLK pin) that drives the CLKFB of the DCM.

Phase Shift Clock - PSCLK

The PSCLK input can be sourced by the CLKIN signal to the DCM, or it can be a lower or higher frequency signal provided from any clock source (external or internal). The frequency range of PSCLK is defined by PSCLK_FREQ_LF/HF (see the Virtex-II Pro Data Sheet). This input has to be tied to ground when the CLKOUT_PHASE_SHIFT attribute is set to NONE or FIXED.

Phase Shift Increment/Decrement - PSINCDEC

The PSINCDEC signal is synchronous to PSCLK and is used to increment or decrement the phase shift factor. In order to increment or decrement the phase shift by 1/256 of clock period, the PSINCDEC signal must be High for increment or Low for decrement. This input has to be tied to ground when the CLKOUT_PHASE_SHIFT attribute is set to NONE or FIXED.

Phase Shift Enable - PSEN

To initiate a variable phase-shift operation, the PSEN input must be activated for one period of PSCLK. The phase change becomes effective after up to 100 CLKIN pulse cycles plus three PSCLK cycles, and is indicated by a High pulse on PSDONE. During the phase transition there are no sporadic changes or glitches on any output. From the time when PSEN is enabled until PSDONE is flagged, the DCM output clock will slide bit-by-bit from its original phase shift to the incremented phase shift. The increment/decrement will be ready by PSDONE. PSEN must be tied to ground when the CLKOUT_PHASE_SHIFT attribute is set to NONE or FIXED.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 108/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 108 of 947

Reset Input — RST

When the reset pin is activated, the LOCKED signal deactivates within four source clock cycles. After reset, the phase shift value is set to its value at configuration in both the fixed and variable modes. The RST pin, active High, must either connect to a dynamic signal or be tied to ground. Activation of the RST pin can also severely affect the duty cycle of the clock output pins. For this reason, activate the reset pin only when reconfiguring the device or changing the input frequency. The reset input signal is asynchronous and should be held High for at least 2 ns.

Locked Output — LOCKED

The LOCKED signal activates after the DCM has achieved lock. To guarantee that the system clock is established prior to the device "waking up," the DCM can delay the completion of the device configuration process until after the DCM locks. The STARTUP_WAIT attribute activates this feature. Until the LOCKED signal activates, the DCM output clocks are not valid and can exhibit glitches, spikes, or other spurious movement. For details, refer to Chapter 4, "Configuration."

Phase Shift DONE - PSDONE

The PSDONE signal is synchronous to PSCLK and it indicates, by pulsing High for one period of PSCLK, that the requested phase shift was achieved. This signal also indicates to the user that a new change to the phase shift numerator can be made. This output signal is not valid if the phase shift feature is not being used or is in fixed mode.

Status - STATUS

STATUS[0] indicates the overflow of the phase shift numerator (when DCM is phase shifted beyond +255 or -255) and that the absolute delay range of the phase shift delay line is exceeded.

Attributes

The following attributes provide access to the Virtex-II Pro fine-phase adjustment capability.

Clock Out Phase Shift

The CLKOUT_PHASE_SHIFT attribute controls the use of the PHASE_SHIFT value. It can be set to NONE, FIXED, or VARIABLE. By default, this attribute is set to NONE, indicating that the phase shift feature is not being used. When this attribute is set to NONE, the PHASE_SHIFT value has no effect on the DCM outputs. If the CLKOUT_PHASE_SHIFT attribute is set to FIXED or NONE, then the PSEN, PSINCDEC, and the PSCLK inputs must be tied to ground. The effects of the CLKOUT_PHASE_SHIFT attribute are shown in Figure 3-33.

PHASE_SHIFT

This attribute specifies the phase shift numerator as any value from -255 to 255. This attribute can be used with both fixed and variable phase shift mode. If used with variable mode, the attribute sets the starting phase shift. .

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 109 of 947

Submodules

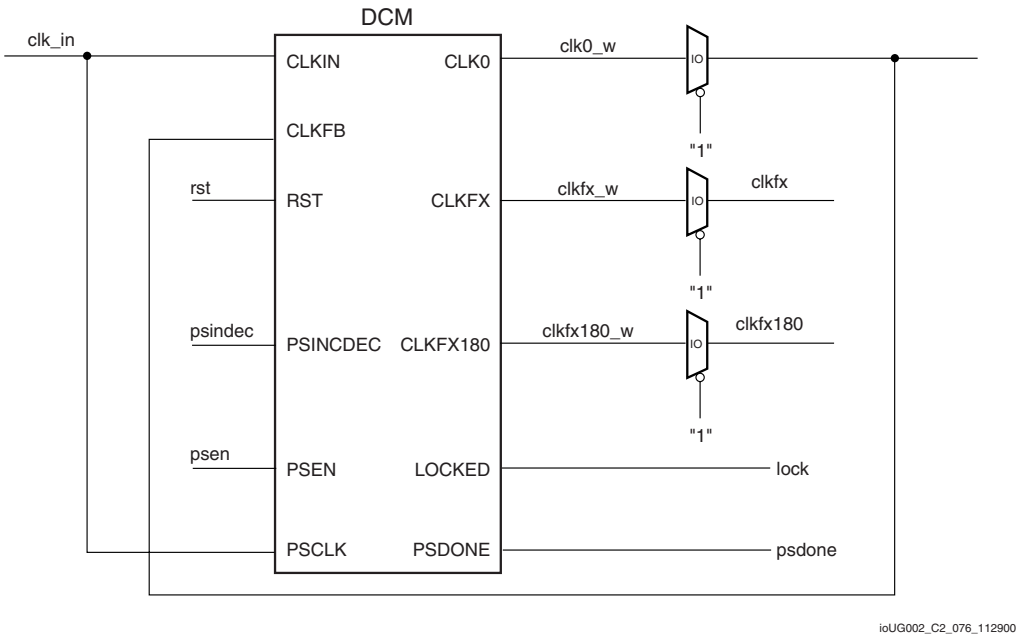


Figure 3-37: **BUFG_PHASE_CLKFX_FB_SUBM**

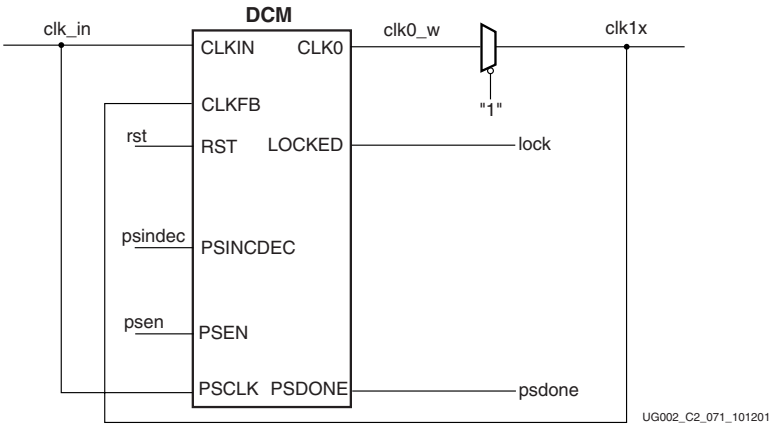


Figure 3-38: **BUFG_PHASE_CLK0_SUBM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 110 of 947

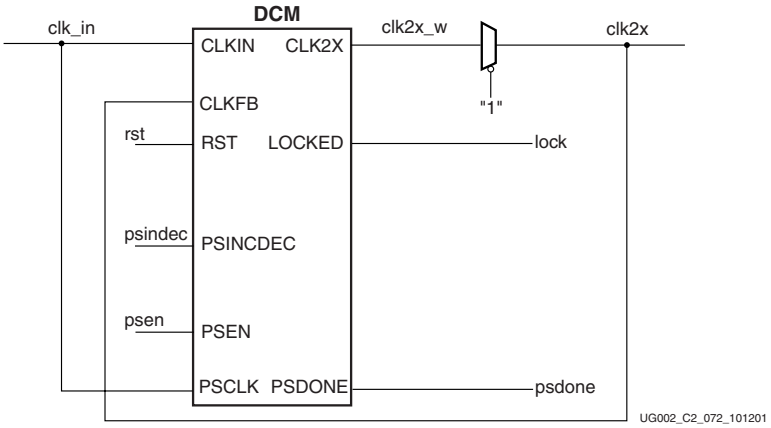


Figure 3-39: **BUFG_PHASE_CLK2X_SUBM**

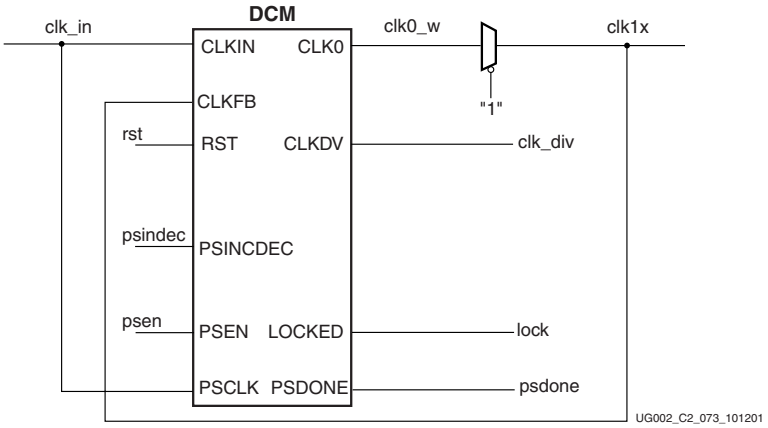


Figure 3-40: **BUFG_PHASE_CLKDV_SUBM**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 111/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 111 of 947

Summary of All DCM Attributes

A handful of DCM attributes govern the functionality of DCM features. Below is a collection of all DCM attributes. Table 3-9 summarizes all attributes applicable to DCMs.

Table 3-9: **DCM Attributes**

DCM Attribute Name	Description	Value	Default Value
CLKDV_DIVIDE	This attribute controls CLKDV such that the source clock is divided by N. This feature provides automatic duty cycle correction such that the CLKDV output pin has a 50/50 duty cycle always in low-frequency mode, as well as for all integer values of the division factor N in high-frequency mode.	Real: 1.5 <= N+0.5 <=8, 8< N+1 < 16	2.0
CLKFX_DIVIDE		Integer: 1 to 32	1
CLKFX_MULTIPLY		Integer: 2 to 32	4
CLKIN_PERIOD	This specifies the source clock period to help DCM adjust for optimum CLKFX/CLKFX180 outputs.	Real in ns	0.0
CLKIN_DIVIDE_BY_2	This attribute allows for the input clock frequency to be divided in half when such a reduction is necessary to meet the DCM input clock frequency requirements. This is characterized to work up to 1.15 GHz at room temperature.	Boolean: FALSE or TRUE	FALSE
CLKOUT_PHASE_SHIFT	This controls the use of the PHASE_SHIFT value.	String: “NONE” or ”FIXED” or ”VARIABLE”	NONE
CLK_FEEDBACK	This attribute specifies the feedback input to the DCM (CLK0, or CLK2X).	String: “1X” or ”2X”	1X
DESKEW_ADJUST	This affects the amount of delay in the feedback path, and should be used for source-synchronous interfaces. [See the “Clock De-Skew” section.]	String: “SYSTEM_SYNCHRONOUS” or “SOURCE_SYNCHRONOUS” or “0 to 15”	SYSTEM_SYNCHRONOUS
DFS_FREQUENCY_MODE	This specifies the frequency mode of the frequency synthesizer.	String: “LOW” or ”HIGH”	LOW
DLL_FREQUENCY_MODE	This specifies the DLL’s frequency mode. CLK90, CLK270, CLK2X, and CLK2X180 are not available in high-frequency mode.	String: “LOW” or ”HIGH”	LOW
DUTY_CYCLE_CORRECTION	This controls the DCM of 1X outputs (CLK0, CLK90, CLK180, and CLK270), such that they exhibit a 50/50 duty cycle. Leave this attribute set at the default value (TRUE).	Boolean: TRUE or FALSE	TRUE

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 112 of 947

Table 3-9: **DCM Attributes *(Continued)***

DCM Attribute Name	Description	Value	Default Value
DSS_MODE	Unsupported feature. Leave the value at default.	String	NONE
FACTORY_JF	This attribute is fixed unless recommended otherwise.	Bit_vector	XC080
PHASE_SHIFT	This specifies the phase shift numerator.	Integer: -255 to 255	0
STARTUP_WAIT	When this attribute is set to TRUE, the configuration startup sequence waits in the specified cycle until the DCM locks.	Boolean: FALSE or TRUE	FALSE

For more information on applying these attributes in UCF, VHDL, or Verilog code, refer to the *Constraints Guide* at: http://toolbox.xilinx.com/docsan/xilinx4/manuals.htm.

VHDL and Verilog Instantiation

VHDL and Verilog instantiation templates are available in the Libraries Guide for all submodules.

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

VHDL and Verilog Templates

The following submodules described in this section are available:

- BUFG_CLK0_SUBM
- BUFG_CLK2X_SUBM
- BUFG_CLK0_FB_SUBM
- BUFG_CLK2X_FB_SUBM
- BUFG_CLKDV_SUBM
- BUFG_DFS_SUBM
- BUFG_DFS_FB_SUBM
- BUFG_PHASE_CLKFX_FB_SUBM
- BUFG_PHASE_CLK0_SUBM
- BUFG_PHASE_CLK2X_SUBM
- BUFG_PHASE_CLKDV_SUBM

The corresponding submodules must be synthesized with the design. The BUFG_CLK0_SUBM submodule is provided in VHDL and Verilog as an example.

VHDL Template

```
-- Module: BUFG_CLK0_SUBM
-- Description: VHDL submodule
-- DCM with CLK0 deskew
-- Device: Virtex-II Pro Family
----------------------------------------------------------------------
library IEEE;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 113/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 113 of 947

```
use IEEE.std_logic_1164.all;
--
-- pragma translate_off
library UNISIM;
use UNISIM.VCOMPONENTS.ALL;
-- pragma translate_on
--
entity BUFG_CLK0_SUBM is
  port (
        CLK_IN : in std_logic;
        RST    : in std_logic;
        CLK1X  : out std_logic;
        LOCK   : out std_logic
       );
end BUFG_CLK0_SUBM;
--
architecture BUFG_CLK0_SUBM_arch of BUFG_CLK0_SUBM is
-- Components Declarations:
component BUFG
  port (
         I : in std_logic;
         O : out std_logic
       );
end component;
component DCM
-- pragma translate_off
    generic (
              DLL_FREQUENCY_MODE : string := "LOW";
              DUTY_CYCLE_CORRECTION : boolean := TRUE;
              STARTUP_WAIT : boolean := FALSE
             );
-- pragma translate_on
    port ( CLKIN     : in  std_logic;
           CLKFB     : in  std_logic;
           DSSEN     : in  std_logic;
           PSINCDEC  : in  std_logic;
           PSEN      : in  std_logic;
           PSCLK     : in  std_logic;
           RST       : in  std_logic;
           CLK0      : out std_logic;
           CLK90     : out std_logic;
           CLK180    : out std_logic;
           CLK270    : out std_logic;
           CLK2X     : out std_logic;
           CLK2X180  : out std_logic;
           CLKDV     : out std_logic;
           CLKFX     : out std_logic;
           CLKFX180  : out std_logic;
           LOCKED    : out std_logic;
           PSDONE    : out std_logic;
           STATUS    : out std_logic_vector(7 downto 0)
         );
end component;
-- Attributes
attribute DLL_FREQUENCY_MODE : string;
attribute DUTY_CYCLE_CORRECTION : string;
attribute STARTUP_WAIT : string;
attribute DLL_FREQUENCY_MODE of U_DCM: label is "LOW";
attribute DUTY_CYCLE_CORRECTION of U_DCM: label is "TRUE";
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 114 of 947

```
attribute STARTUP_WAIT of U_DCM: label is "FALSE";
-- Signal Declarations:
signal GND : std_logic;
signal CLK0_W: std_logic;
signal CLK1X_W: std_logic;
begin
GND <= '0';
CLK1X <= CLK1X_W;
-- DCM Instantiation
U_DCM: DCM
  port map (
            CLKIN =>    CLK_IN,
            CLKFB =>    CLK1X_W,
            DSSEN =>    GND,
            PSINCDEC => GND,
            PSEN =>     GND,
            PSCLK =>    GND,
            RST =>      RST,
            CLK0 =>     CLK0_W,
            LOCKED =>   LOCK
     );
-- BUFG Instantiation
U_BUFG: BUFG
  port map  (
       I => CLK0_W,
       O => CLK1X_W
            );
end BUFG_CLK0_SUBM_arch;
```

Verilog Template

```
// Module:      BUFG_CLK0_SUBM
// Description: Verilog Submodule
//  DCM with CLK0 deskew
//
// Device: Virtex-II Pro Family
//----------------------------------------------------------------------

module BUFG_CKL0_SUBM (
                       CLK_IN,
                       RST,
                       CLK1X,
                       LOCK
                      );

    input CLK_IN;
    input RST;

    output CLK1X;
    output LOCK;

    wire CLK0_W;
    wire GND;

    assign GND = 1'b0;

//BUFG Instantiation
//
BUFG  U_BUFG
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 115 of 947

```
            (.I(CLK0_W),
             .O(CLK1X)
            );

// Attributes for functional simulation//
// synopsys translate_off
       defparam U_DCM.DLL_FREQUENCY_MODE = "LOW";
       defparam U_DCM.DUTY_CYCLE_CORRECTION = "TRUE";
       defparam U_DCM.STARTUP_WAIT = "FALSE";
// synopsys translate_on

// Instantiate the DCM primitive//
  DCM U_DCM (
                    .CLKFB(CLK1X),
                    .CLKIN(CLK_IN),
                    .DSSEN(GND),
                    .PSCLK(GND),
      .PSEN(GND),
                    .PSINCDEC(GND),
                    .RST(RST),
                    .CLK0(CLK0_W),
      .LOCKED(LOCK)
                  );

// synthesis attribute declarations
  /* synopsys attribute

  DLL_FREQUENCY_MODE "LOW"
  DUTY_CYCLE_CORRECTION "TRUE"
  STARTUP_WAIT "FALSE"
  */
endmodule
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net




Ex. 1012
CISCO SYSTEMS, INC. / Page 116 of 947

DCM Waveforms

The DCM waveforms shown below are the results of functional simulation using Model Technology's ModelSim EE/Plus 5.3a_p1 simulator. Note that the time scale for these simulations were set to 1ns/1ps. It is important to set the unused inputs of the DCM to logic 0 and to set the attribute values to the correct data types. For example, the PHASE_SHIFT, CLKFX_DIVIDE, and CLKFX_MULTIPLY attributes are integers and should be set to values as shown.

```
defparam U_DCM.DFS_FREQUENCY_MODE = "LOW";
defparam U_DCM.CLKFX_DIVIDE = 1; (this value's range is specified under
Frequency Synthesis in the Virtex-II Pro Data Sheet)
defparam U_DCM.CLKFX_MULTIPLY = 4; (this value's range is specified
under Frequency Synthesis in the Virtex-II Pro Data Sheet)
defparam U_DCM.CLKOUT_PHASE_SHIFT = "FIXED";
defparam U_DCM.PHASE_SHIFT = 150;       (Any value from 1 to 255)
defparam U_DCM.STARTUP_WAIT = "FALSE";
```

The input clock, 'clk_in' (CLKIN input of DCM) in all these waveforms is 50 MHz. The DCM_DLL waveforms in Figure 3-41 shows four DCM outputs, namely, clk1x (CLK0 output of DCM), clk2x (CLK2X output of DCM), clk90 (CLK90 output of DCM), and clk180 (CLK180 output of DCM).

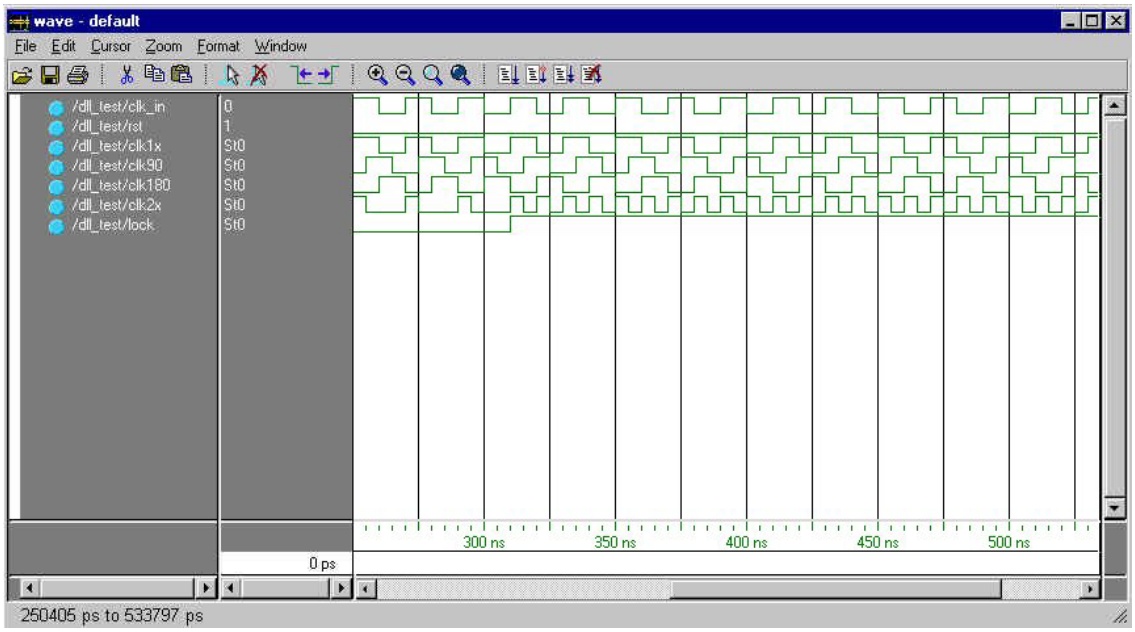

ug002_c2_095_113000

Figure 3-41: **DCM_DLL Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 117 of 947

The DCM_DFS Waveforms in Figure 3-42 shows four DCM outputs namely, clk1x (CLK0 output of DCM), clk2x (CLK2X output of DCM), clkfx (CLKFX output of DCM), and clkfx180 (CLKFX180 output of DCM). In this case the attributes, CLKFX_DIVIDE = 1, and the CLKFX_MULTIPLY = 3.

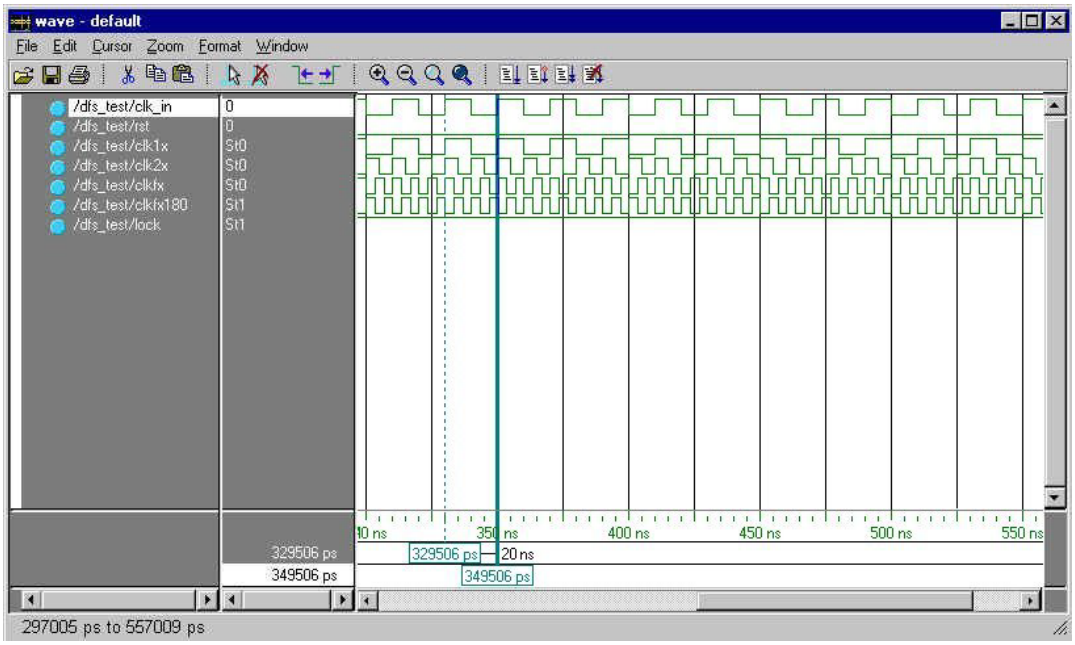


Figure 3-42: **DCM_DFS Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 118 of 947

The DCM_DPS waveforms in Figure 3-43 shows four DCM outputs, namely, clk1x (CLK0 output of DCM), clk2x (CLK2X output of DCM), clk90 (CLK90 output of DCM), and clk180 (CLK180 output of DCM). In this case, the attribute PHASE_SHIFT = 150 which translates to a phase shift of (150 x 20 ns)/256 = 11.719 ns, where 20 ns is the clock period.

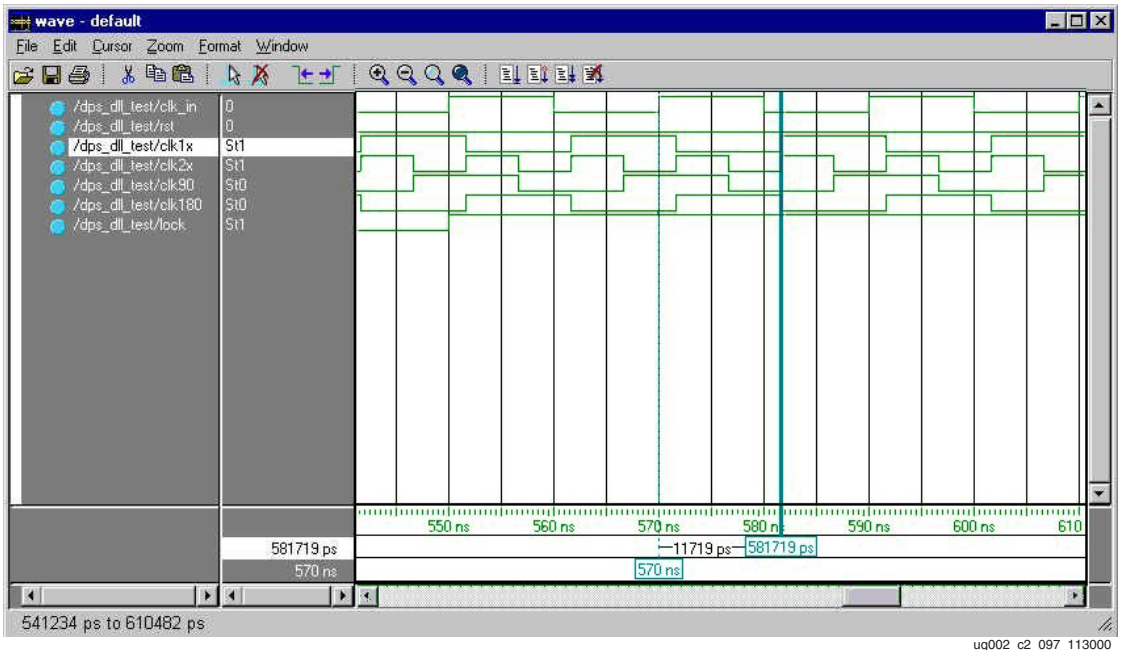


Figure 3-43: **DCM_DPS Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 119 of 947

The DCM_DPS_DFS waveforms in Figure 3-44 shows four DCM outputs namely, clk1x (CLK0 output of DCM), clk90 (CLK90 output of DCM), clkfx (CLKFX output of DCM), and clkfx180 (CLKFX180 output of DCM). In this case, the attributes, CLKFX_DIVIDE = 1, and the CLKFX_MULTIPLY = 4. The attribute, PHASE_SHIFT = 150 which translates to a phase shift of (150 x 20 ns)/256 = 11.719 ns, where 20 ns is the clock period..

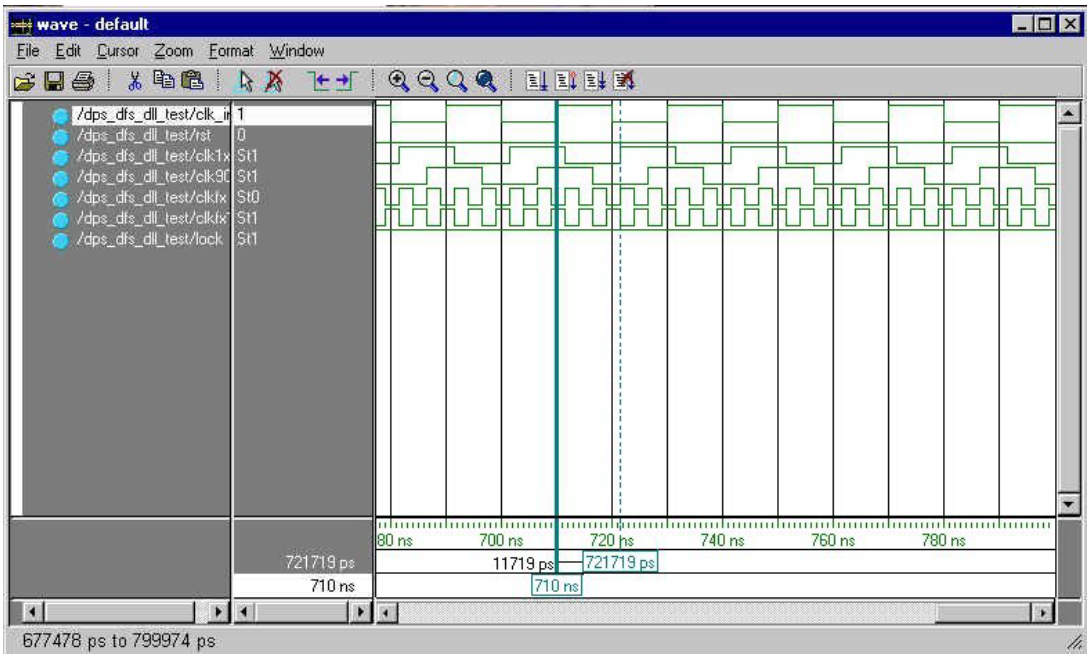


Figure 3-44: **DCM_DPS_DFS Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 120 of 947

Block SelectRAM™ Memory

Introduction

In addition to distributed SelectRAM memory, Virtex-II Pro devices feature a large number of 18 Kb block SelectRAM memories. The block SelectRAM memory is a True Dual-Port™ RAM, offering fast, discrete, and large blocks of memory in the device. The memory is organized in columns, and the total amount of block SelectRAM memory depends on the size of the Virtex-II Pro device. The 18 Kb blocks are cascadable to enable a deeper and wider memory implementation, with a minimal timing penalty incurred through specialized routing resources.

Embedded dual- or single-port RAM modules, ROM modules, synchronous FIFOs, and data width converters are easily implemented using the Xilinx CORE Generator “Block Memory” modules. Asynchronous FIFOs can be generated using the CORE Generator Asynchronous FIFO and "Block Memory" module. Starting with IP Update #3, the designer can also generate synchronous FIFOs using Block Memory.

Synchronous Dual-Port and Single-Port RAM

Data Flow

The 18Kb block SelectRAM dual-port memory consists of an 18 Kb storage area and two completely independent access ports, A and B. The structure is fully symmetrical, and both ports are interchangeable.

Data can be written to either port and can be read from the same or the other port. Each port is synchronous, with its own clock, clock enable, and write enable. Note that the read operation is also synchronous and requires a clock edge.

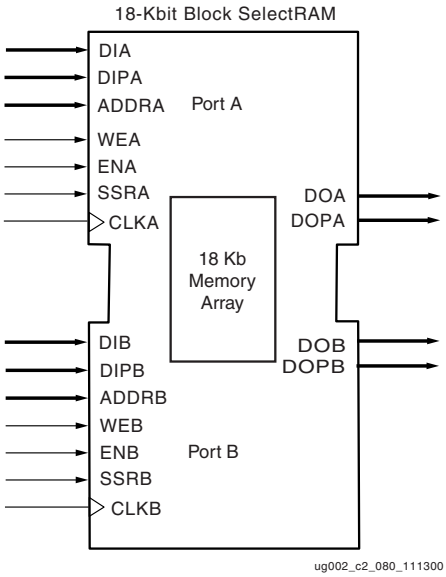


Figure 3-45: **Dual-Port Data Flows**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 121/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 121 of 947

As described below, there are three options for the behavior of the data output during a write operation on its port. There is no dedicated monitor to arbitrate the result of identical addresses on both ports. It is up to the user to time the two clocks appropriately. However, conflicting simultaneous writes to the same location never cause any physical damage.

Operating Modes

To maximize utilization of the True Dual-Port memory at each clock edge, the block SelectRAM memory supports three different write modes for each port. The "read during write" mode offers the flexibility of using the data output bus during a write operation on the same port. Output behavior is determined by the configuration. This choice increases the efficiency of block SelectRAM memory at each clock cycle and allows designs that use maximum bandwidth.

Read Operation

The read operation uses one clock edge. The read address is registered on the read port, and the stored data is loaded into the output latches after the RAM access interval passes.

Write Operations

A write operation is a single clock-edge operation. The write address is registered on the write port, and the data input is stored in memory.

Three different modes are used to determine data available on the output latches after a write clock edge.

WRITE_FIRST or Transparent Mode (Default)

In WRITE_FIRST mode, the input data is simultaneously written into memory and stored in the data output (transparent write), as shown in Figure 3-46.

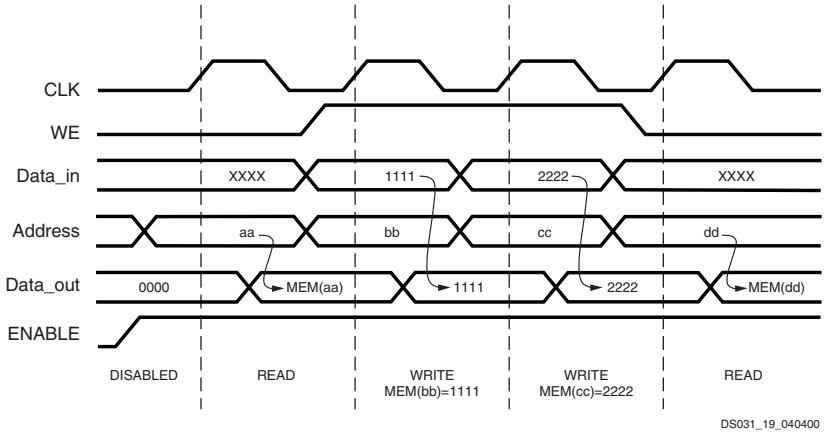


Figure 3-46: **WRITE_FIRST Mode Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 122 of 947

READ_FIRST or Read-Before-Write Mode

In READ_FIRST mode, data previously stored at the write address appears on the output latches, while the input data is being stored in memory (read before write). See Figure 3-47.

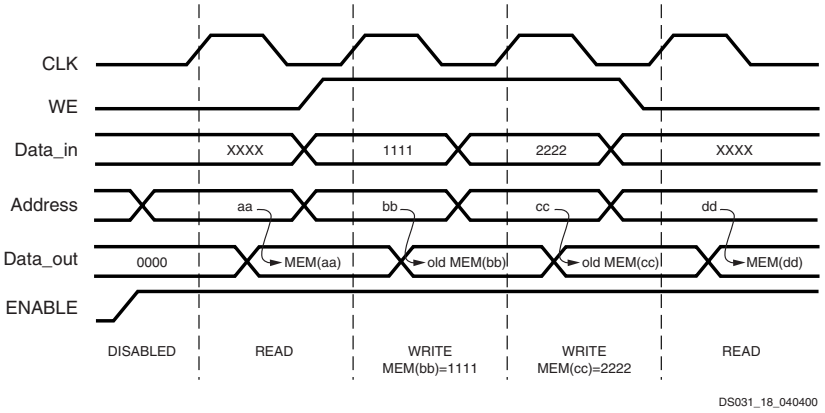


Figure 3-47: **READ_FIRST Mode Waveforms**

NO_CHANGE Mode

In NO_CHANGE mode, the output latches remain unchanged during a write operation. As shown in Figure 3-48, data output is still the last read data and is unaffected by a write operation on the same port.

Mode selection is set by configuration. One of these three modes is set individually for each port by an attribute. The default mode is WRITE_FIRST.

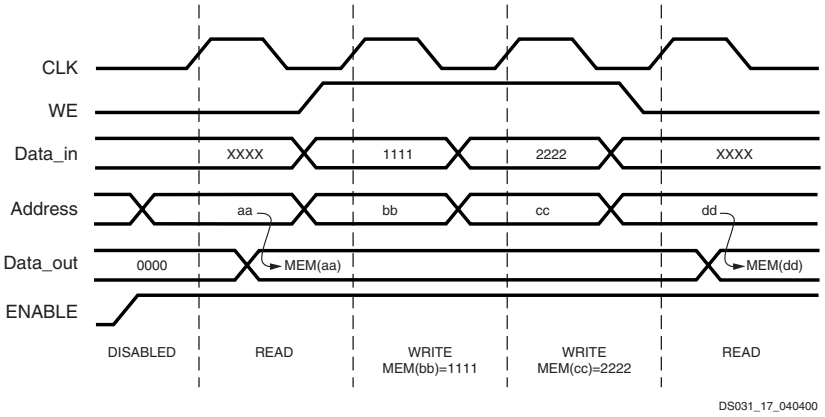


Figure 3-48: **NO_CHANGE Mode Waveforms**

Conflict Resolution

Virtex-II Pro block SelectRAM memory is a True Dual-Port RAM that allows both ports to simultaneously access the same memory cell. When one port writes to a given memory cell, the other port must not address that memory cell (for a write or a read) within the clock-to-clock setup window. Figure 3-49 describes this asynchronous operation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 123 of 947

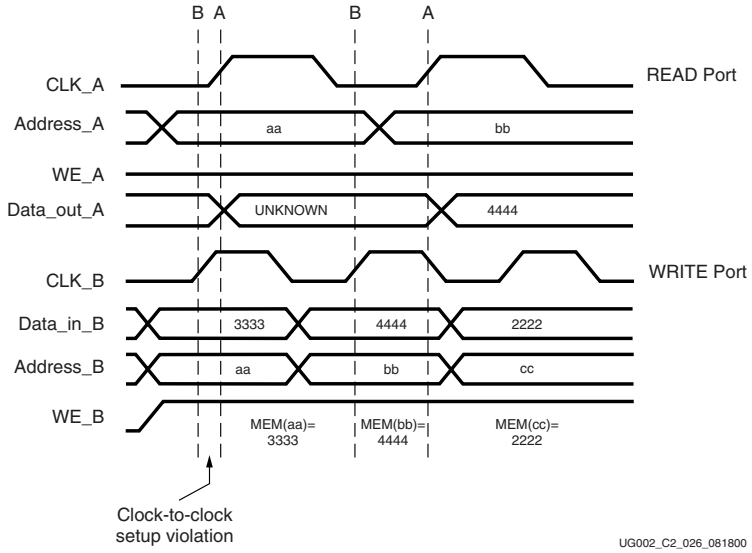


Figure 3-49: **READ-WRITE Conditions**

If port A and port B are configured with different widths, only the overlapping bits are invalid when conflicts occur.

Asynchronous Clocks

The first CLK_A clock edge violates the clock-to-clock setup parameter, because it occurs too soon after the last CLK_B clock edge. The write operation on port B is valid, and the read operation on port A is invalid.

At the second rising edge of the CLK_B pin, the write operation is valid. The memory location (bb) contains 4444. The second rising edge of CLK_A reads the new data at the same location (bb), which now contains 4444.

The clock-to-clock setup timing parameter is specified together with other block SelectRAM switching characteristics in the Virtex-II Pro Data Sheet.

Synchronous Clocks

When both clocks are synchronous or identical, the result of simultaneous accesses from both ports to the same memory cell is best described in words:

- If both ports read simultaneously from the same memory cell:
  Both Data_out ports will have the same data.
- If both ports write simultaneously into the same memory cell:
  The data stored in that cell becomes invalid (unless both ports write identical data).
- If one port writes and the other port reads from the same memory cell:
  The write operation succeeds, and the data to be read out from the read port will be determined by the read output mode (write_first, read_first, or no_change).

  If the write port is in read_first mode, the read port's Data_out represents the previous content of the memory cell. If the write port is in write_first mode or in no_change mode, the read port's Data_out becomes invalid. Obviously, the read port's mode setting does not affect this operation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 124 of 947

Characteristics

- A write operation requires only one clock edge.
- A read operation requires only one clock edge.
- All inputs are registered with the port clock and have a setup-to-clock timing specification.
- All outputs have a read-through function or one of three read-during-write functions, depending on the state of the WE pin. The outputs relative to the port clock are available after the clock-to-out timing interval.
- Block SelectRAM cells are true synchronous RAM memories and do not have a combinatorial path from the address to the output.
- The ports are completely independent of each other (that is, clocking, control, address, read/write functions, initialization, and data width) without arbitration.
- Output ports are latched with a self-timed circuit, guaranteeing glitch-free reads. The state of the output port does not change until the port executes another read or write operation.
- Data input and output signals are always buses; that is, in a 1-bit width configuration, the data input signal is DI[0] and the data output signal is DO[0].

Library Primitives

The input and output data buses are represented by two buses for 9-bit width (8+1), 18-bit width (16+2), and 36-bit width (32+4) configurations. The ninth bit associated with each byte can store parity or error correction bits. No specific function is performed on this bit.

The separate bus for parity bits facilitates some designs. However, other designs safely use a 9-bit, 18-bit, or 36-bit bus by merging the regular data bus with the parity bus. Read/write and storage operations are identical for all bits, including the parity bits.

Figure 3-50 shows the generic dual-port block RAM primitive. DIA, DIPA, ADDRA, DOA, DOPA, and the corresponding signals on port B are buses.

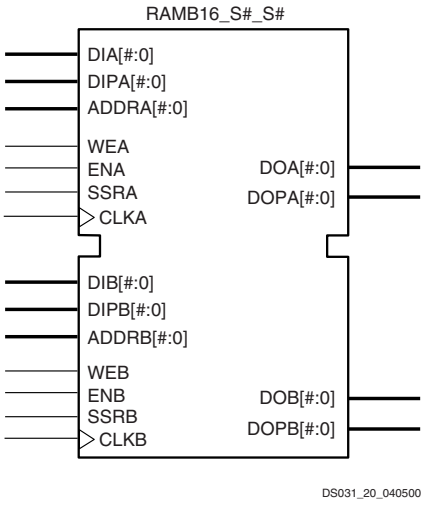


Figure 3-50: **Dual-Port Block RAM Primitive**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 125 of 947

Table 3-10 lists the available dual-port primitives for synthesis and simulation.

Table 3-10: **Dual-Port Block RAM Primitives**

Primitive	Port A Width	Port B Width
RAMB16_S1_S1	1	1
RAMB16_S1_S2		2
RAMB16_S1_S4		4
RAMB16_S1_S9		(8+1)
RAMB16_S1_S18		(16+2)
RAMB16_S1_S36		(32+4)
RAMB16_S2_S2	2	2
RAMB16_S2_S4		4
RAMB16_S2_S9		(8+1)
RAMB16_S2_S18		(16+2)
RAMB16_S2_S36		(32+4)
RAMB16_S4_S4	4	4
RAMB16_S4_S9		(8+1)
RAMB16_S4_S18		(16+2)
RAMB16_S4_S36		(32+4)
RAMB16_S9_S9	(8+1)	(8+1)
RAMB16_S9_S18		(16+2)
RAMB16_S9_S36		(32+4)
RAMB16_S18_S18	(16+2)	(16+2)
RAMB16_S18_S36		(32+4)
RAMB16_S36_S36	(32+4)	(32+4)

Figure 3-51 shows the generic single-port block RAM primitive. DI, DIP, ADDR, DO, and DOP are buses.

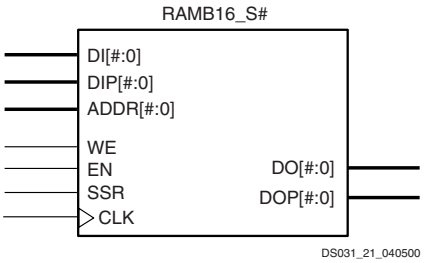


Figure 3-51: **Single-Port Block RAM Primitive**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 126 of 947

Table 3-11 lists all of the available single-port primitives for synthesis and simulation.

Table 3-11: **Single-Port Block RAM Primitives**

Primitive	Port Width
RAMB16_S1	1
RAMB16_S2	2
RAMB16_S4	4
RAMB16_S9	(8+1)
RAMB16_S18	(16+2)
RAMB16_S36	(32+4)

VHDL and Verilog Instantiation

VHDL and Verilog instantiation templates are available as examples ("VHDL and Verilog Templates," page 128).

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

The SelectRAM_Ax templates (with x = 1, 2, 4, 9, 18, or 36) are single-port modules and instantiate the corresponding RAMB16_Sx module.

SelectRAM_Ax_By templates (with x = 1, 2, 4, 9, 18, or 36 and y = = 1, 2, 4, 9, 18, or 36) are dual-port modules and instantiate the corresponding RAMB16_Sx_Sy module.

Port Signals

Each block SelectRAM port operates independently of the other while accessing the same set of 18K-bit memory cells.

Clock - CLK[A|B]

Each port is fully synchronous with independent clock pins. All port input pins have setup time referenced to the port CLK pin. The data bus has a clock-to-out time referenced to the CLK pin. Clock polarity is configurable (rising edge by default).

Enable - EN[A|B]

The enable pin affects the read, write, and set/reset functionality of the port. Ports with an inactive enable pin keep the output pins in the previous state and do not write data to the memory cells. Enable polarity is configurable (active High by default).

Write Enable - WE[A|B]

Both EN and WE are active when the contents of the data input bus is written to memory at the address pointed to by the address bus. The output latches are loaded or not loaded according to the write configuration (WRITE_FIRST, READ_FIRST, NO_CHANGE). When inactive, a read operation occurs, and the contents of the memory cells referenced by the address bus reflect on the data-out bus, regardless of the write mode attribute. Write enable polarity is configurable (active High by default).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 127 of 947

Set/Reset - SSR[A|B]

The SSR pin forces the data output latches to contain the value "SRVAL" (see "Attributes," page 125). The data output latches are synchronously asserted to 0 or 1, including the parity bit. In a 36-bit width configuration, each port has an independent SRVAL[A | B] attribute of 36 bits. This operation does not affect RAM memory cells and does not disturb write operations on the other port. Like the read and write operation, the set/reset function is active only when the enable pin of the port is active. Set/reset polarity is configurable (active High by default).

Address Bus - ADDR[A|B]<#:0>

The address bus selects the memory cells for read or write. The width of the port determines the required address bus width, as shown in Table 3-12.

Table 3-12: **Port Aspect Ratio**

Port Data Width	Depth	ADDR Bus	DI Bus / DO Bus	DIP Bus / DOP Bus
1	16,384	<13:0>	<0>	NA
2	8,192	<12:0>	<1:0>	NA
4	4,096	<11:0>	<3:0>	NA
9	2,048	<10:0>	<7:0>	<0>
18	1,024	<9:0>	<15:0>	<1:0>
36	512	<8:0>	<31:0>	<3:0>

Data-In Buses - DI[A|B]<#:0> & DIP[A|B]<#:0>

Data-in buses provide the new data value to be written into RAM. The regular data-in bus (DI) and the parity data-in bus (when available) have a total width equal to the port width. For example the 36-bit port data width is represented by DI<31:0> and DIP<3:0>, as shown in Table 3-12

Data-Out Buses - DO[A|B]<#:0> & DOP[A|B]<#:0>

Data-out buses reflect the contents of memory cells referenced by the address bus at the last active clock edge during a read operation. During a write operation (WRITE_FIRST or READ_FIRST configuration), the data-out buses reflect either the data-in buses or the stored value before write. During a write operation in NO_CHANGE mode, data-out buses are not affected. The regular data-out bus (DO) and the parity data-out bus (DOP) (when available) have a total width equal to the port width, as shown in Table 3-12.

Inverting Control Pins

For each port, the four control pins (CLK, EN, WE, and SSR) each have an individual inversion option. Any control signal can be configured as active High or Low, and the clock can be active on a rising or falling edge (active High on rising edge by default) without requiring other logic resources.

Unused Inputs

Non-connected Data and/or address inputs should be connected to logic "1".

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 128 of 947

GSR

The global set/reset (GSR) signal of a Virtex-II Pro device is an asynchronous global signal that is active at the end of device configuration. The GSR can also restore the initial Virtex-II Pro state at any time. The GSR signal initializes the output latches to the INIT, or to the INIT_A and INIT_B value (see "Attributes"). A GSR signal has no impact on internal memory contents. Because it is a global signal, the GSR has no input pin at the functional level (block SelectRAM primitive).

Address Mapping

Each port accesses the same set of 18,432 memory cells using an addressing scheme dependent on the width of the port. The physical RAM locations addressed for a particular width are determined using the following formula (of interest only when the two ports use different aspect ratios):

```
END = ((ADDR + 1) * Width) -1 START= ADDR * Width
```

Table 3-13 shows low-order address mapping for each port width.

Table 3-13: **Port Address Mapping**

Port Width	Parity Locations	Data Locations
1	N.A.	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0
2		15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0
4		7 6 5 4 3 2 1 0
8 + 1	3 2 1 0	3 2 1 0
16 + 2	1 0	1 0
32 + 4	0	0

Attributes

Content Initialization - INIT_xx

INIT_xx attributes define the initial memory contents. By default block SelectRAM memory is initialized with all zeros during the device configuration sequence. The 64 initialization attributes from INIT_00 through INIT_3F represent the regular memory contents. Each INIT_xx is a 64-digit hex-encoded bit vector. The memory contents can be partially initialized and are automatically completed with zeros.

The following formula is used for determining the bit positions for each INIT_xx attribute.

Given yy = conversion hex-encoded to decimal (xx), INIT_xx corresponds to the memory cells as follows:

- from [(yy + 1) * 256] -1
- to (yy) * 256

For example, for the attribute INIT_1F, the conversion is as follows:

- yy = conversion hex-encoded to decimal X"1F" = 31
- from [(31+1) * 256] -1 = 8191
- to 31 * 256 = 7936

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 129/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 129 of 947

More examples are given in Table 3-14.

Table 3-14: **Block SelectRAM Initialization Attributes**

Attribute	Memory Cell	
	from	to
INIT_00	255	0
INIT_01	511	256
INIT_02	767	512
…	…	…
INIT_0E	3839	3584
INIT_0F	4095	3840
INIT_10	4351	4096
…	…	…
INIT_1F	8191	7936
INIT_20	8447	8192
…	…	…
INIT_2F	12287	12032
INIT_30	12543	12288
..	…	…
INIT_3F	16383	16128

Content Initialization - INITP_xx

INITP_xx attributes define the initial contents of the memory cells corresponding to DIP/DOP buses (parity bits). By default these memory cells are also initialized to all zeros. The eight initialization attributes from INITP_00 through INITP_07 represent the memory contents of parity bits. Each INITP_xx is a 64-digit hex-encoded bit vector and behaves like a regular INIT_xx attribute. The same formula can be used to calculate the bit positions initialized by a particular INITP_xx attribute.

Output Latches Initialization - INIT (INIT_A & INIT_B)

The INIT (single-port) or INIT_A and INIT_B (dual-port) attributes define the output latches values after configuration. The width of the INIT (INIT_A & INIT_B) attribute is the port width, as shown in Table 3-15. These attributes are hex-encoded bit vectors and the default value is 0.

Output Latches Synchronous Set/Reset - SRVAL (SRVAL_A & SRVAL_B)

The SRVAL (single-port) or SRVAL_A and SRVAL_B (dual-port) attributes define output latch values when the SSR input is asserted. The width of the SRVAL (SRVAL_A and SRVAL_B) attribute is the port width, as shown in Table 3-15. These attributes are hex-encoded bit vectors and the default value is 0.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 130 of 947

Table 3-15: **Port Width Values**

Port Data Width	DOP Bus	DO Bus	INIT / SRVAL
1	NA	<0>	1
2	NA	<1:0>	2
4	NA	<3:0>	4
9	<0>	<7:0>	(1+8) = 9
18	<1:0>	<15:0>	(2+16) = 18
36	<3:0>	<31:0>	(4 + 32) = 36

Initialization in VHDL or Verilog Codes

Block SelectRAM memory structures can be initialized in VHDL or Verilog code for both synthesis and simulation. For synthesis, the attributes are attached to the block SelectRAM instantiation and are copied in the EDIF output file to be compiled by Xilinx Alliance Series™ tools. The VHDL code simulation uses a `generic` parameter to pass the attributes. The Verilog code simulation uses a `defparam` parameter to pass the attributes.

The XC2V_RAMB_1_PORT block SelectRAM instantiation code examples (in VHDL and Verilog) illustrate these techniques (see "VHDL and Verilog Templates," page 128).

Location Constraints

Block SelectRAM instances can have LOC properties attached to them to constrain placement. Block SelectRAM placement locations differ from the convention used for naming CLB locations, allowing LOC properties to transfer easily from array to array.

The LOC properties use the following form:

```
LOC = RAMB16_X#Y#
```

The RAMB16_X0Y0 is the bottom-left block SelectRAM location on the device.

Applications

Creating Larger RAM Structures

Block SelectRAM columns have specialized routing to allow cascading blocks with minimal routing delays. Wider or deeper RAM structures are achieved with a smaller timing penalty than is encountered when using normal routing resources.

The CORE Generator program offers the designer a painless way to generate wider and deeper memory structures using multiple block SelectRAM instances. This program outputs VHDL or Verilog instantiation templates and simulation models, along with an EDIF file for inclusion in a design.

Multiple RAM Organizations

The flexibility of block SelectRAM memories allows designs with various types of RAM in addition to regular configurations. Application notes at www.xilinx.com describe some of these designs, with VHDL and Verilog reference designs included:

- XAPP258, *FIFOs Using Virtex-II Block RAM*
- XAPP260, *Using Virtex-II Block RAM for High Performance Read/Write CAMs*

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 131 of 947

VHDL and Verilog Templates

VHDL and Verilog templates are available in the Libraries Guide for all single-port and dual-port primitives. The A and B numbers indicate the width of the ports.

The following are single-port templates:

- SelectRAM_A1
- SelectRAM_A2
- SelectRAM_A4
- SelectRAM_A9
- SelectRAM_A18
- SelectRAM_A36

The following are dual-port templates:

- SelectRAM_A1_B1
- SelectRAM_A1_B2
- SelectRAM_A1_B4
- SelectRAM_A1_B9
- SelectRAM_A1_B18
- SelectRAM_A1_B36
- SelectRAM_A2_B2
- SelectRAM_A2_B4
- SelectRAM_A2_B9
- SelectRAM_A2_B18
- SelectRAM_A2_B36
- SelectRAM_A4_B4
- SelectRAM_A4_B9
- SelectRAM_A4_B18
- SelectRAM_A4_B36
- SelectRAM_A9_B9
- SelectRAM_A9_B18
- SelectRAM_A9_B36
- SelectRAM_A18_B18
- SelectRAM_A18_B36
- SelectRAM_A36_B36

VHDL Template

As an example, the **XC2V_RAMB_1_PORT.vhd** file uses the SelectRAM_A36 template:

```
-- Module: XC2V_RAMB_1_PORT
-- Description: 18Kb Block SelectRAM example
-- Single Port 512 x 36 bits
-- Use template "SelectRAM_A36.vhd"
--
-- Device: Virtex-II Pro Family
----------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 132 of 947

```
--
-- Syntax for Synopsys FPGA Express
-- pragma translate_off
library UNISIM;
use UNISIM.VCOMPONENTS.ALL;
-- pragma translate_on
--
entity XC2V_RAMB_1_PORT is
   port (
    DATA_IN : in std_logic_vector (35 downto 0);
        ADDRESS   : in std_logic_vector (8 downto 0);
        ENABLE: in std_logic;
        WRITE_EN     : in std_logic;
        SET_RESET    : in std_logic;
        CLK    : in std_logic;
        DATA_OUT     : out std_logic_vector (35 downto 0)
       );
end XC2V_RAMB_1_PORT;
--
architecture XC2V_RAMB_1_PORT_arch of XC2V_RAMB_1_PORT is
--
-- Components Declarations:
--
component BUFG
  port (
  I : in std_logic;
  O : out std_logic
  );
end component;
--
-- Syntax for Synopsys FPGA Express
component RAMB16_S36
-- pragma translate_off
  generic (
-- "Read during Write" attribute for functional simulation
  WRITE_MODE : string := "READ_FIRST" ; -- WRITE_FIRST(default)/
READ_FIRST/ NO_CHANGE
-- Output value after configuration
  INIT : bit_vector(35 downto 0)  := X"000000000";
-- Output value if SSR active
  SRVAL : bit_vector(35 downto 0)  := X"012345678";
-- Plus bits initial content
       INITP_00 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000FEDCBA9876543210";
       INITP_01 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_02 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_03 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_04 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_05 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_06 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INITP_07 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
-- Regular bits initial content
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 133/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 133 of 947

```
       INIT_00 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000FEDCBA9876543210";
       INIT_01 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INIT_02 : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       ... (cut)
       INIT_3E : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000";
       INIT_3F : bit_vector(255 downto 0) :=
X"0000000000000000000000000000000000000000000000000000000000000000"
  );
-- pragma translate_on
  port (
        DI     : in std_logic_vector (31 downto 0);
        DIP    : in std_logic_vector (3 downto 0);
        ADDR   : in std_logic_vector (8 downto 0);
        EN     : in STD_LOGIC;
        WE     : in STD_LOGIC;
        SSR    : in STD_LOGIC;
        CLK    : in STD_LOGIC;
        DO     : out std_logic_vector (31 downto 0);
        DOP    : out std_logic_vector (3 downto 0)
  );
end component;
--
-- Attribute Declarations:
attribute WRITE_MODE : string;
attribute INIT: string;
attribute SRVAL: string;
--
attribute INITP_00: string;
attribute INITP_01: string;
attribute INITP_02: string;
attribute INITP_03: string;
attribute INITP_04: string;
attribute INITP_05: string;
attribute INITP_06: string;
attribute INITP_07: string;
--
attribute INIT_00: string;
attribute INIT_01: string;
attribute INIT_02: string;
… (cut)
attribute INIT_3E: string;
attribute INIT_3F: string;
--
-- Attribute "Read during Write mode" = WRITE_FIRST(default)/
READ_FIRST/ NO_CHANGE
attribute WRITE_MODE of U_RAMB16_S36: label is "READ_FIRST";
attribute INIT of U_RAMB16_S36: label is "000000000";
attribute SRVAL of U_RAMB16_S36: label is "012345678";
--
-- RAMB16 memory initialization for Alliance
-- Default value is "0" / Partial initialization strings are padded
-- with zeros to the left
attribute INITP_00 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000FEDCBA9876543210";
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 134 of 947

```
attribute INITP_01 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_02 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_03 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_04 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_05 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_06 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INITP_07 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
--
attribute INIT_00 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000FEDCBA9876543210";
attribute INIT_01 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INIT_02 of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
... (cut)
attribute INIT_3E of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
attribute INIT_3F of U_RAMB16_S36: label is
"0000000000000000000000000000000000000000000000000000000000000000";
--
--
-- Signal Declarations:
--
-- signal VCC : std_logic;
-- signal GND : std_logic;
signal CLK_BUFG: std_logic;
signal INV_SET_RESET : std_logic;
--
begin
-- VCC <= '1';
-- GND <= '0';
--
-- Instantiate the clock Buffer
U_BUFG: BUFG
  port map (
  I => CLK,
  O => CLK_BUFG
  );
--
-- Use of the free inverter on SSR pin
INV_SET_RESET <= NOT SET_RESET;

-- Block SelectRAM Instantiation
U_RAMB16_S36: RAMB16_S36
  port map (
        DI     => DATA_IN (31 downto 0), -- insert 32 bits data-in bus
(<31 downto 0>)
        DIP    => DATA_IN (35 downto 32), -- insert 4 bits parity data-
in bus (or <35 downto 32>)
       ADDR   => ADDRESS (8 downto 0), -- insert 9 bits address bus
         EN     => ENABLE, -- insert enable signal
         WE     => WRITE_EN, -- insert write enable signal
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 135 of 947

```
        SSR     => INV_SET_RESET, -- insert set/reset signal
        CLK     => CLK_BUFG, -- insert clock signal
       DO     => DATA_OUT (31 downto 0), -- insert 32 bits data-out bus
(<31 downto 0>)
       DOP    => DATA_OUT (35 downto 32)  -- insert 4 bits parity data-
out bus (or <35 downto 32>)
  );
--
end XC2V_RAMB_1_PORT_arch;
-------------------------------------------------------------------------
```

Verilog Template

```
// Module: XC2V_RAMB_1_PORT
// Description: 18Kb Block SelectRAM-II example
//  Single Port 512 x 36 bits
//  Use template "SelectRAM_A36.v"
//
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------

module XC2V_RAMB_1_PORT (CLK, SET_RESET, ENABLE, WRITE_EN, ADDRESS,
DATA_IN, DATA_OUT);


input CLK, SET_RESET, ENABLE, WRITE_EN;
input [35:0] DATA_IN;
input [8:0] ADDRESS;
output [35:0] DATA_OUT;

wire CLK_BUFG, INV_SET_RESET;

//Use of the free inverter on SSR pin
assign INV_SET_RESET = ~SET_RESET;


// initialize block ram for simulation
// synopsys translate_off
defparam
  //"Read during Write" attribute for functional simulation
  U_RAMB16_S36.WRITE_MODE = "READ_FIRST",   //WRITE_FIRST(default)/
READ_FIRST/ NO_CHANGE
  //Output value after configuration
  U_RAMB16_S36.INIT = 36'h000000000,
  //Output value if SSR active
  U_RAMB16_S36.SRVAL = 36'h012345678,

  //Plus bits initial content
  U_RAMB16_S36.INITP_00 =
256'h0123456789ABCDEF0000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_01 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_02 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_03 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_04 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 136 of 947

```
  U_RAMB16_S36.INITP_05 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_06 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INITP_07 =
256'h0000000000000000000000000000000000000000000000000000000000000000,

  //Regular bits initial content
  U_RAMB16_S36.INIT_00 =
256'h0123456789ABCDEF0000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INIT_01 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INIT_02 =
256'h0000000000000000000000000000000000000000000000000000000000000000,
...<cut>
  U_RAMB16_S36.INIT_3E =
256'h0000000000000000000000000000000000000000000000000000000000000000,
  U_RAMB16_S36.INIT_3F =
256'h0000000000000000000000000000000000000000000000000000000000000000;
 // synopsys translate_on

//Instantiate the clock Buffer
BUFG U_BUFG (  .I(CLK), .O(CLK_BUFG));

//Block SelectRAM Instantiation
RAMB16_S36 U_RAMB16_S36 (   .DI(DATA_IN[31:0]),
         .DIP(DATA_IN-PARITY[35:32]),
         .ADDR(ADDRESS),
         .EN(ENABLE),
         .WE(WRITE_EN),
         .SSR(INV_SET_RESET),
         .CLK(CLK_BUFG),
         .DO(DATA_OUT[31:0]),
         .DOP(DATA_OUT-PARITY[35:32]));

// synthesis attribute declarations
  /* synopsys attribute

  WRITE_MODE "READ_FIRST"
  INIT "000000000"
  SRVAL "012345678"

  INITP_00
"0123456789ABCDEF0000000000000000000000000000000000000000000000000"
  INITP_01
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_02
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_03
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_04
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_05
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_06
"0000000000000000000000000000000000000000000000000000000000000000"
  INITP_07
"0000000000000000000000000000000000000000000000000000000000000000"
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 137 of 947

```
  INIT_00
"0123456789ABCDEF0000000000000000000000000000000000000000000000000000"
  INIT_01
"0000000000000000000000000000000000000000000000000000000000000000000000"
  INIT_02
"0000000000000000000000000000000000000000000000000000000000000000000000"
...<cut>
  INIT_3E
"0000000000000000000000000000000000000000000000000000000000000000000000"
  INIT_3F
"0000000000000000000000000000000000000000000000000000000000000000000000"
  */

endmodule
```

Distributed SelectRAM Memory

Introduction

In addition to 18Kb SelectRAM blocks, Virtex-II Pro devices feature distributed SelectRAM modules. Each function generator or LUT of a CLB resource can implement a 16 x 1-bit synchronous RAM resource. Distributed SelectRAM memory writes synchronously and reads asynchronously. However, a synchronous read can be implemented using the register that is available in the same slice. This 16 x 1-bit RAM is cascadable for a deeper and/or wider memory implementation, with a minimal timing penalty incurred through specialized logic resources.

Distributed SelectRAM modules up to a size of 128 x 1 are available as primitives. Two 16 x 1 RAM resources can be combined to form a dual-port 16 x 1 RAM with one dedicated read/write port and a second read-only port. One port writes into both 16 x1 RAMs simultaneously, but the second port reads independently.

This section provides generic VHDL and Verilog reference code examples implementing *n*-bit-wide single-port and dual-port distributed SelectRAM memory.

Distributed SelectRAM memory enables many high-speed applications that require relatively small embedded RAM blocks, such as FIFOs, which are close to the logic that uses them.

Virtex-II Pro Distributed SelectRAM memories can be generated using the CORE Generator Distributed Memory module (V2.0 or later). The user can also generate Distributed RAM-based Asynchronous and Synchronous FIFOs using the CORE Generator.

Single-Port and Dual-Port RAM

Data Flow

Distributed SelectRAM memory supports the following:

- Single-port RAM with synchronous write and asynchronous read
- Dual-port RAM with one synchronous write and two asynchronous read ports

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 138 of 947

As illustrated in the Figure 3-52, the dual port has one read/write port and an independent read port.

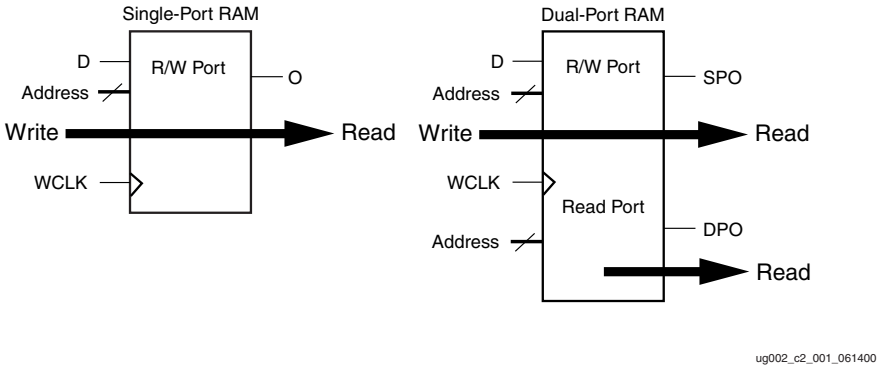


Figure 3-52: **Single-Port and Dual-Port Distributed SelectRAM**

Any read/write operation can occur simultaneously with and independently of a read operation on the other port.

Write Operations

The write operation is a single clock-edge operation, with a write enable that is active High by default. When the write enable is Low, no data is written into the RAM. When the write enable is High, the clock edge latches the write address and writes the data on D into the RAM.

Read Operation

The read operation is a combinatorial operation. The address port (single or dual port) is asynchronous with an access time equivalent to the logic delay.

Read During Write

When new data is synchronously written, the output reflects the data in the memory cell addressed (transparent mode). The timing diagram in Figure 3-53 illustrates a write operation, with the previous data read on the output port, before the clock edge and then the new data.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 139/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 139 of 947

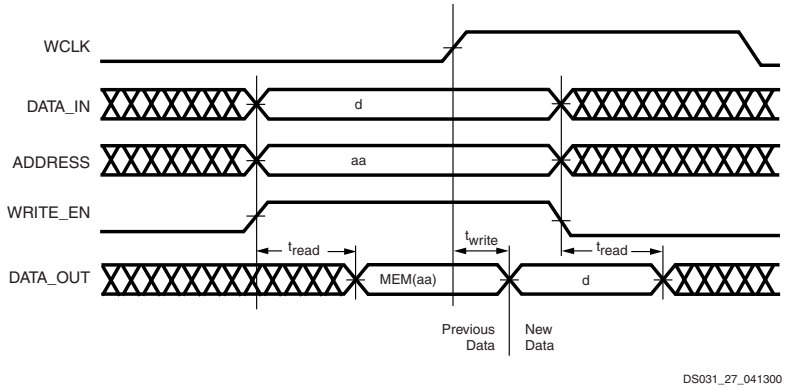


Figure 3-53: **Write Timing Diagram**

Characteristics

- A write operation requires only one clock edge.
- A read operation requires only the logic access time.
- Outputs are asynchronous and dependent only on the logic delay.
- Data and address inputs are latched with the write clock and have a setup-to-clock timing specification. There is no hold time requirement.
- For dual-port RAM, one address is the write and read address, the other address is an independent read address.

Library Primitives

Seven library primitives from 16 x 1-bit to 128 x 1-bit are available. Four primitives are single-port RAM and three primitives are True Dual-Port RAM, as shown in Table 3-16.

Table 3-16: **Single-Port and Dual-Port Distributed SelectRAM**

Primitive	RAM Size	Type	Address Inputs
RAM16X1S	16 bits	single-port	A3, A2, A1, A0
RAM32X1S	32 bits	single-port	A4, A3, A2, A1, A0
RAM64X1S	64 bits	single-port	A5, A4, A3, A2, A1, A0
RAM128X1S	128 bits	single-port	A6, A5, A4, A3, A2, A1, A0
RAM16X1D	16 bits	dual-port	A3, A2, A1, A0
RAM32X1D	32 bits	dual-port	A4, A3, A2, A1, A0
RAM64X1D	64 bits	dual-port	A5, A4, A3, A2, A1, A0

The input and output data are 1-bit wide. However, several distributed SelectRAM memories can be used to implement wide memory blocks.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 140 of 947

Figure 3-54 shows generic single-port and dual-port distributed SelectRAM primitives. The A and DPRA signals are address buses.

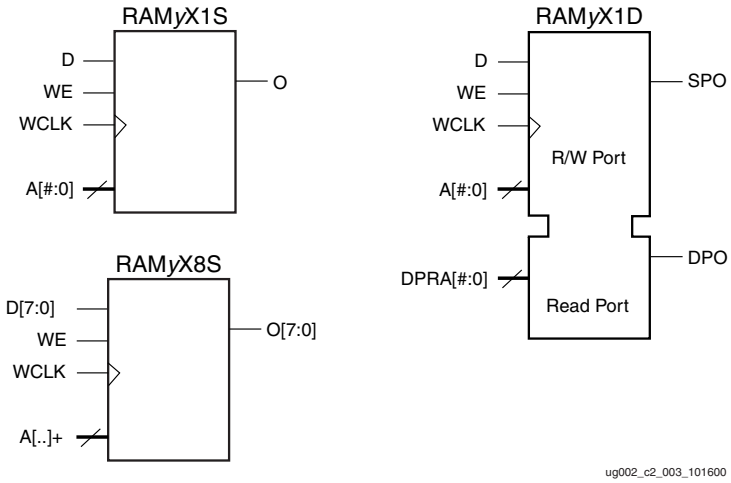


Figure 3-54: **Single-Port and Dual-Port Distributed SelectRAM Primitive**

As shown in Table 3-17, wider library primitives are available for 2-bit, 4-bit, and 8-bit RAM.

Table 3-17: **Wider Library Primitives**

Primitive	RAM Size	Data Inputs	Address Inputs	Data Outputs
RAM16x2S	16 x 2-bit	D1, D0	A3, A2, A1, A0	O1, O0
RAM32X2S	32 x 2-bit	D1, D0	A4, A3, A2, A1, A0	O1, O0
RAM64X2S	64 x 2-bit	D1, D0	A5, A4, A3, A2, A1, A0	O1, O0
RAM16X4S	16 x 4-bit	D3, D2, D1, D0	A3, A2, A1, A0	O3, O2, O1, O0
RAM32X4S	32 x 4-bit	D3, D2, D1, D0	A4,A3, A2, A1, A0	O3, O2, O1, O0
RAM16X8S	16 x 8-bit	D <7:0>	A3, A2, A1, A0	O <7:0>
RAM32X8S	32 x 8-bit	D <7:0>	A4,A3, A2, A1, A0	O <7:0>

VHDL and Verilog Instantiation

VHDL and Verilog instantiations templates are available as examples (see "VHDL and Verilog Templates," page 142).

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

The SelectRAM_*x*S templates (with *x* = 16, 32, 64, or 128) are single-port modules and instantiate the corresponding RAM*x*X1S primitive.

SelectRAM_*x*D templates (with *x* = 16, 32, or 64) are dual-port modules and instantiate the corresponding RAM*x*X1D primitive.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 141/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 141 of 947

Ports Signals

Each distributed SelectRAM port operates independently of the other while reading the same set of memory cells.

Clock - WCLK

The clock is used for the synchronous write. The data and the address input pins have setup time referenced to the WCLK pin.

Enable - WE

The enable pin affects the write functionality of the port. An inactive Write Enable prevents any writing to memory cells. An active Write Enable causes the clock edge to write the data input signal to the memory location pointed to by the address inputs.

Address - A0, A1, A2, A3 (A4, A5, A6)

The address inputs select the memory cells for read or write. The width of the port determines the required address inputs. Note that the address inputs are not a bus in VHDL or Verilog instantiations.

Data In - D

The data input provides the new data value to be written into the RAM.

Data Out - O, SPO, and DPO

The data out O (Single-Port or SPO) and DPO (Dual-Port) reflects the contents of the memory cells referenced by the address inputs. Following an active write clock edge, the data out (O or SPO) reflects the newly written data.

Inverting Control Pins

The two control pins (WCLK and WE) each have an individual inversion option. Any control signal, including the clock, can be active at 0 (negative edge for the clock) or at 1 (positive edge for the clock) without requiring other logic resources.

GSR

The global set/reset (GSR) signal does not affect distributed SelectRAM modules.

Attributes

Content Initialization - INIT

With the INIT attributes, users can define the initial memory contents after configuration. By default distributed SelectRAM memory is initialized with all zeros during the device configuration sequence. The initialization attribute INIT represents the specified memory contents. Each INIT is a hex-encoded bit vector. Table 3-18 shows the length of the INIT attribute for each primitive.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 142 of 947

Table 3-18: **INIT Attributes Length**

Primitive	Template	INIT Attribute Length
RAM16X1S	SelectRAM_16S	4 digits
RAM32X1S	SelectRAM_32S	8 digits
RAM64X1S	SelectRAM_64S	16 digits
RAM128X1S	SelectRAM_128S	32 digits
RAM16X1D	SelectRAM_16S	4 digits
RAM32X1D	SelectRAM_32S	8 digits
RAM64X1D	SelectRAM_64S	16 digits

Initialization in VHDL or Verilog Codes

Distributed SelectRAM memory structures can be initialized in VHDL or Verilog code for both synthesis and simulation. For synthesis, the attributes are attached to the distributed SelectRAM instantiation and are copied in the EDIF output file to be compiled by Xilinx Alliance Series™ tools. The VHDL code simulation uses a `generic` parameter to pass the attributes. The Verilog code simulation uses a `defparam` parameter to pass the attributes.

The distributed SelectRAM instantiation templates (in VHDL and Verilog) illustrate these techniques (see "VHDL and Verilog Templates," page 142).

Location Constraints

The CLB has four slices S0, S1, S2 and S3. As an example, in the bottom left CLB, the slices have the coordinates shown below:

Slice S3	Slice S2	Slice S1	Slice S0
X1Y1	X1Y0	X0Y1	X0Y0

Distributed SelectRAM instances can have LOC properties attached to them to constrain placement. The RAM16X1S primitive fits in any LUT of slices S0 or S1.

For example, the instance `U_RAM16` is placed in slice X0Y0 with the following LOC properties:

```
INST "U_RAM16" LOC = "SLICE_X0Y0";
```

The RAM16X1D primitive occupies half of two slices, as shown in Figure 3-55. The first slice (output SPO) implements the read/write port with the same address A[3:0] for read and write. The second slice implements the second read port with the address DPRA[3:0] and is written simultaneously with the first slice to the address A[3:0].

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 143 of 947

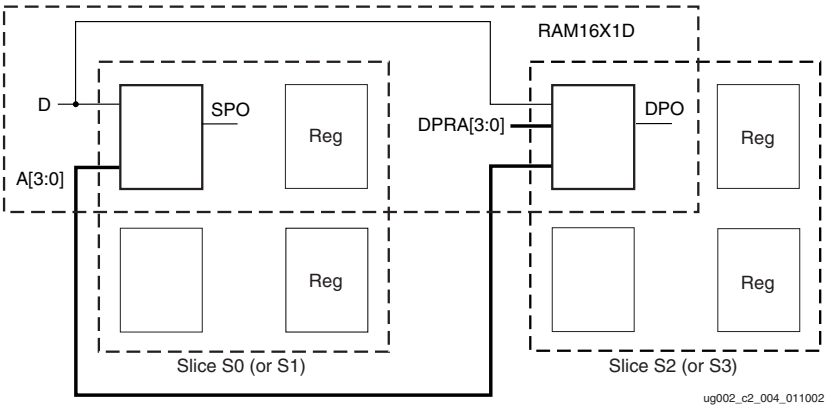


Figure 3-55: **RAM16X1D Placement**

In the same CLB module, the dual-port RAM16X1D either occupies half of slices S0 (X0Y0) and S2 (X1Y0), or half of slices S1 (X0Y1) and S3 (X1Y1).

If a dual-port 16 x 2-bit module is built, the two RAM16X1D primitives occupy two slices, as long as they share the same clock and write enable, as illustrated in Figure 3-56.

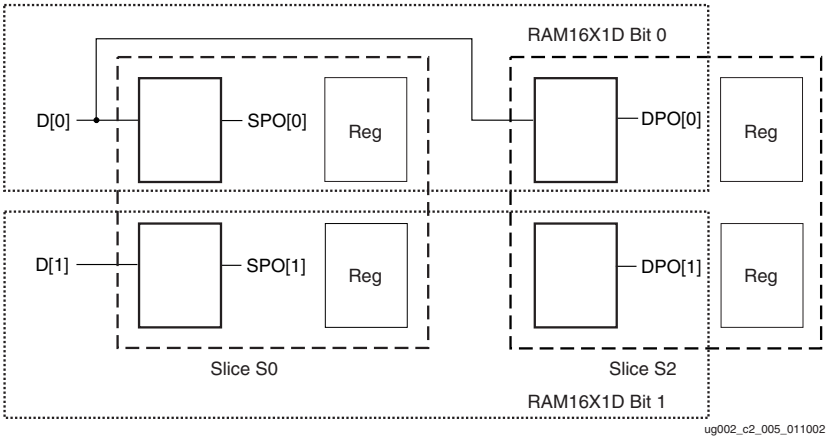


Figure 3-56: **Two RAM16X1D Placement**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 144/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 144 of 947

A RAM32X1S primitive fits in one slice, as shown in Figure 3-57.

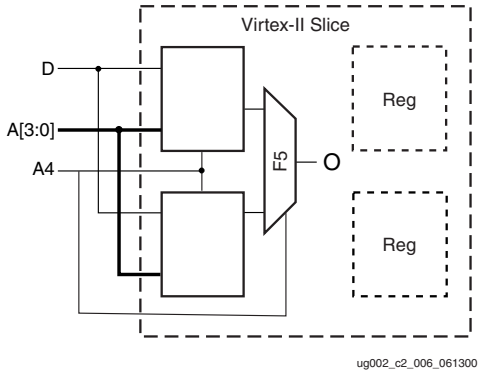


Figure 3-57: **RAM32X1S Placement**

Following the same rules, a RAM32X1D primitive fits in two slices, with one slice implementing the read/write port and the second slice implementing the second read port.

The RAM64X1S primitive occupies two slices and the RAM64X1D primitive occupies four slices (one CLB element), with two slices implementing the read/write port and two other slices implementing the second read port. The RAM64X1S read path is built on the MUXF5 and MUXF6 multiplexers.

The RAM128X1S primitive occupies four slices, equivalent to one CLB element.

Distributed SelectRAM placement locations use the slice location naming convention, allowing LOC properties to transfer easily from array to array.

Applications

Creating Larger RAM Structures

The memory compiler program generates wider and/or deeper memory structures using distributed SelectRAM instances. Along with an EDIF file for inclusion in a design, this program produces VHDL and Verilog instantiation templates and simulation models.

Table 3-19 shows the generic VHDL and Verilog distributed SelectRAM examples provided to implement *n*-bit-wide memories.

Table 3-19: **VHDL and Verilog Submodules**

Submodules	Primitive	Size	Type
XC2V_RAM16XN_S_SUBM	RAM16X1S	16 words x *n*-bit	single-port
XC2V_RAM32XN_S_SUBM	RAM32X1S	32 words x *n*-bit	single-port
XC2V_RAM64XN_S_SUBM	RAM64X1S	64 words x *n*-bit	single-port
XC2V_RAM128XN_S_SUBM	RAM128X1S	128 words x *n*-bit	single-port
XC2V_RAM16XN_D_SUBM	RAM16X1D	16 words x *n*-bit	dual-port
XC2V_RAM32XN_D_SUBM	RAM32X1D	32 words x *n*-bit	dual-port
XC2V_RAM64XN_D_SUBM	RAM64X1D	64 words x *n*-bit	dual-port

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 145 of 947

By using the read/write port for the write address and the second read port for the read address, a FIFO that can read and write simultaneously is easily generated. Simultaneous access doubles the effective throughput of the memory.

VHDL and Verilog Templates

VHDL and Verilog templates are available in the Libraries Guide for all single-port and dual-port primitives. The number in each template indicates the number of bits (for example, SelectRAM_16S is the template for the 16 x 1-bit RAM); S indicates single-port, and D indicates dual-port.

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

The following are single-port templates:

- SelectRAM_16S
- SelectRAM_32S
- SelectRAM_64S
- SelectRAM_128S

The following are dual-port templates:

- SelectRAM_16D
- SelectRAM_32D
- SelectRAM_64D

Templates for the SelectRAM_16S module are provided in VHDL and Verilog code as examples.

VHDL Template

```
-- Module: SelectRAM_16S
--
-- Description: VHDL instantiation template
--              Distributed SelectRAM
--              Single Port 16 x 1
--              can be used also for RAM16X1S_1
--
-- Device: Virtex-II Pro Family
--
------------------------------------------------------------------------
--
-- Components Declarations:
--
component RAM16X1S
-- pragma translate_off
   generic (
-- RAM initialization ("0" by default) for functional simulation:
         INIT : bit_vector := X"0000"
         );
-- pragma translate_on
  port (
         D    : in std_logic;
         WE   : in std_logic;
         WCLK : in std_logic;
         A0   : in std_logic;
         A1   : in std_logic;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 146 of 947

```
        A2    : in std_logic;
        A3    : in std_logic;
        O     : out std_logic
        );
end component;
--
-----------------------------------------------------------------------
--
-- Architecture  section:
--
-- Attributes for RAM initialization ("0" by default):
attribute INIT: string;
--
attribute INIT of U_RAM16X1S: label is "0000";
--
-- Distributed SelectRAM Instantiation
U_RAM16X1S: RAM16X1S
  port map (
    D      => , -- insert input signal
    WE     => , -- insert Write Enable signal
    WCLK   => , -- insert Write Clock signal
    A0     => , -- insert Address 0 signal
    A1     => , -- insert Address 1 signal
    A2     => , -- insert Address 2 signal
    A3     => , -- insert Address 3 signal
    O      =>   -- insert output signal
  );
--
-----------------------------------------------------------------------
```

Verilog Template

```
//
// Module: SelectRAM_16S
//
// Description: Verilog instantiation template
//              Distributed SelectRAM
//              Single Port 16 x 1
//              can be used also for RAM16X1S_1
//
// Device: Virtex-II Pro Family
//
//-----------------------------------------------------------------------
//
//
// Syntax for Synopsys FPGA Express
// synopsys translate_off

  defparam

       //RAM initialization ("0" by default) for functional simulation:
  U_RAM16X1S.INIT = 16'h0000;
// synopsys translate_on


//Distributed SelectRAM Instantiation
RAM16X1S U_RAM16X1S (  .D(),      // insert input signal
                .WE(),     // insert Write Enable signal
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 147/94

Ex. 1012
CISCO SYSTEMS, INC. / Page 147 of 947

```
                    .WCLK(),    // insert Write Clock signal
                     .A0(),      // insert Address 0 signal
                     .A1(),      // insert Address 1 signal
                     .A2(),      // insert Address 2 signal
                     .A3(),      // insert Address 3 signal
                     .O()        // insert output signal
                      );

// synthesis attribute declarations
  /* synopsys attribute

  INIT "0000"
  */
```

Look-Up Tables as Shift Registers (SRLs)

Introduction

Virtex-II Pro can configure any look-up table (LUT) as a 16-bit shift register without using the flip-flops available in each slice. Shift-in operations are synchronous with the clock, and output length is dynamically selectable. A separate dedicated output allows the cascading of any number of 16-bit shift registers to create whatever size shift register is needed. Each CLB resource can be configured using the 8 LUTs as a 128-bit shift register.

This section provides generic VHDL and Verilog submodules and reference code examples for implementing from 16-bit up to 128-bit shift registers. These submodules are built from 16-bit shift-register primitives and from dedicated MUXF5, MUXF6, MUXF7, and MUXF8 multiplexers.

These shift registers enable the development of efficient designs for applications that require delay or latency compensation. Shift registers are also useful in synchronous FIFO and content-addressable memory (CAM) designs. To quickly generate a Virtex-II Pro shift register without using flip-flops (i.e., using the SRL16 element(s)), use the CORE Generator RAM-based Shift Register module.

Shift Register Operations

Data Flow

Each shift register (SRL16 primitive) supports:

- Synchronous shift-in
- Asynchronous 1-bit output when the address is changed dynamically
- Synchronous shift-out when the address is fixed

In addition, cascadable shift registers (SRLC16) support synchronous shift-out output of the last (16th) bit. This output has a dedicated connection to the input of the next SRLC16 inside the CLB resource. Two primitives are illustrated in Figure 3-58.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 148 of 947

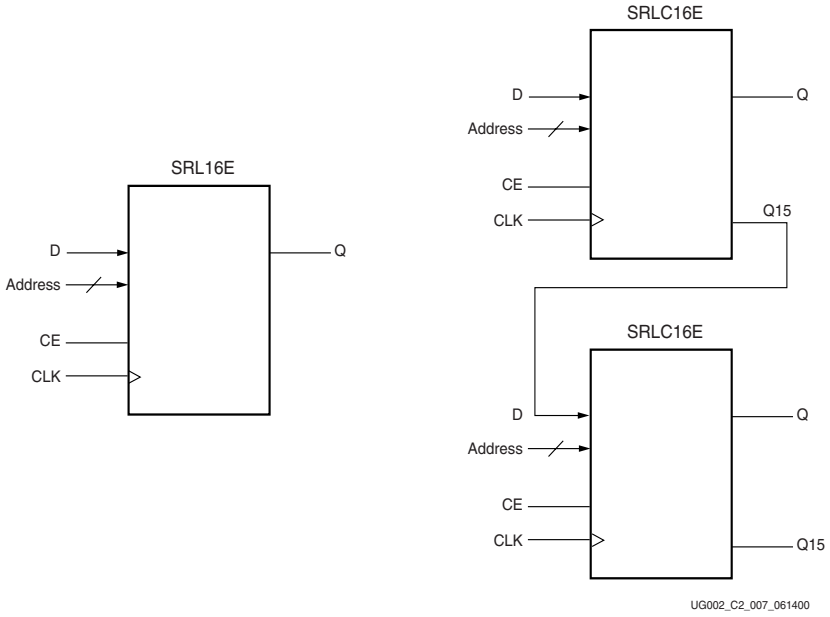


Figure 3-58: **Shift Register and Cascadable Shift Register**

Shift Operation

The shift operation is a single clock-edge operation, with an active High clock enable feature. When enable is High, the input (D) is loaded into the first bit of the shift register, and each bit is shifted to the next highest bit position. In a cascadable shift register configuration (such as SRLC16), the last bit is shifted out on the Q15 output.

The bit selected by the 4-bit address appears on the Q output.

Dynamic Read Operation

The Q output is determined by the 4-bit address. Each time a new address is applied to the 4-input address pins, the new bit position value is available on the Q output after the time delay to access the LUT. This operation is asynchronous and independent of the clock and clock enable signals.

Figure 3-59 illustrates the shift and dynamic read operations.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 149/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 149 of 947

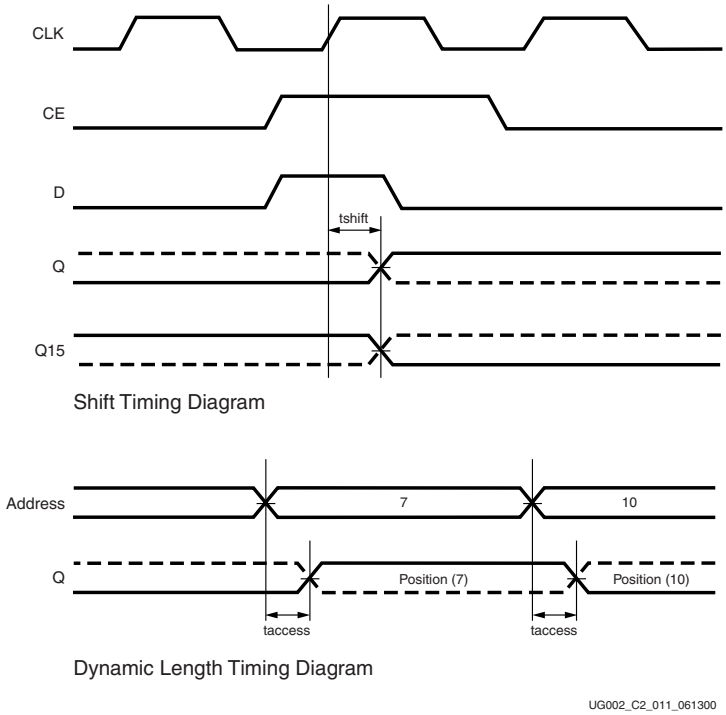


Figure 3-59: **Shift- and Dynamic-Length Timing Diagrams**

Static Read Operation

If the 4-bit address is fixed, the Q output always uses the same bit position. This mode implements any shift register length up 1 to 16 bits in one LUT. Shift register length is (N+1) where N is the input address.

The Q output changes synchronously with each shift operation. The previous bit is shifted to the next position and appears on the Q output.

Characteristics

- A shift operation requires one clock edge.
- Dynamic-length read operations are asynchronous (Q output).
- Static-length read operations are synchronous (Q output).
- The data input has a setup-to-clock timing specification.
- In a cascadable configuration, the Q15 output always contains the last bit value.
- The Q15 output changes synchronously after each shift operation.

Library Primitives and Submodules

Eight library primitives are available that offer optional clock enable (CE), inverted clock ($\overline{CLK}$) and cascadable output (Q15) combinations.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 150 of 947

Table 3-20 lists all of the available primitives for synthesis and simulation.

Table 3-20: **Shift Register Primitives**

Primitive	Length	Control	Address Inputs	Output
SRL16	16 bits	CLK	A3,A2,A1,A0	Q
SRL16E	16 bits	CLK, CE	A3,A2,A1,A0	Q
SRL16_1	16 bits	$\overline{\text{CLK}}$	A3,A2,A1,A0	Q
SRL16E_1	16 bits	$\overline{\text{CLK}}$, CE	A3,A2,A1,A0	Q
SRLC16	16 bits	CLK	A3,A2,A1,A0	Q, Q15
SRLC16E	16 bits	CLK, CE	A3,A2,A1,A0	Q, Q15
SRLC16_1	16 bits	$\overline{\text{CLK}}$	A3,A2,A1,A0	Q, Q15
SRLC16E_1	16 bits	$\overline{\text{CLK}}$, CE	A3,A2,A1,A0	Q, Q15

In addition to the 16-bit primitives, three submodules that implement 32-bit, 64-bit, and 128-bit cascadable shift registers are provided in VHDL and Verilog code. Table 3-21 lists available submodules.

Table 3-21: **Shift Register Submodules**

Submodule	Length	Control	Address Inputs	Output
SRLC32E_SUBM	32 bits	CLK, CE	A4,A3,A2,A1,A0	Q, Q31
SRLC64E_SUBM	64 bits	CLK, CE	A5, A4, A3,A2,A1,A0	Q, Q63
SRLC128E_SUBM	128 bits	CLK, CE	A6, A5, A4, A3,A2,A1,A0	Q, Q127

The submodules are based on SRLC16E primitives, which are associated with dedicated multiplexers (MUXF5, MUXF6, and so forth). This implementation allows a fast static- and dynamic-length mode, even for very large shift registers.

Figure 3-60 represents the cascadable shift registers (32-bit and 64-bit) implemented by the submodules in Table 3-21.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 151 of 947

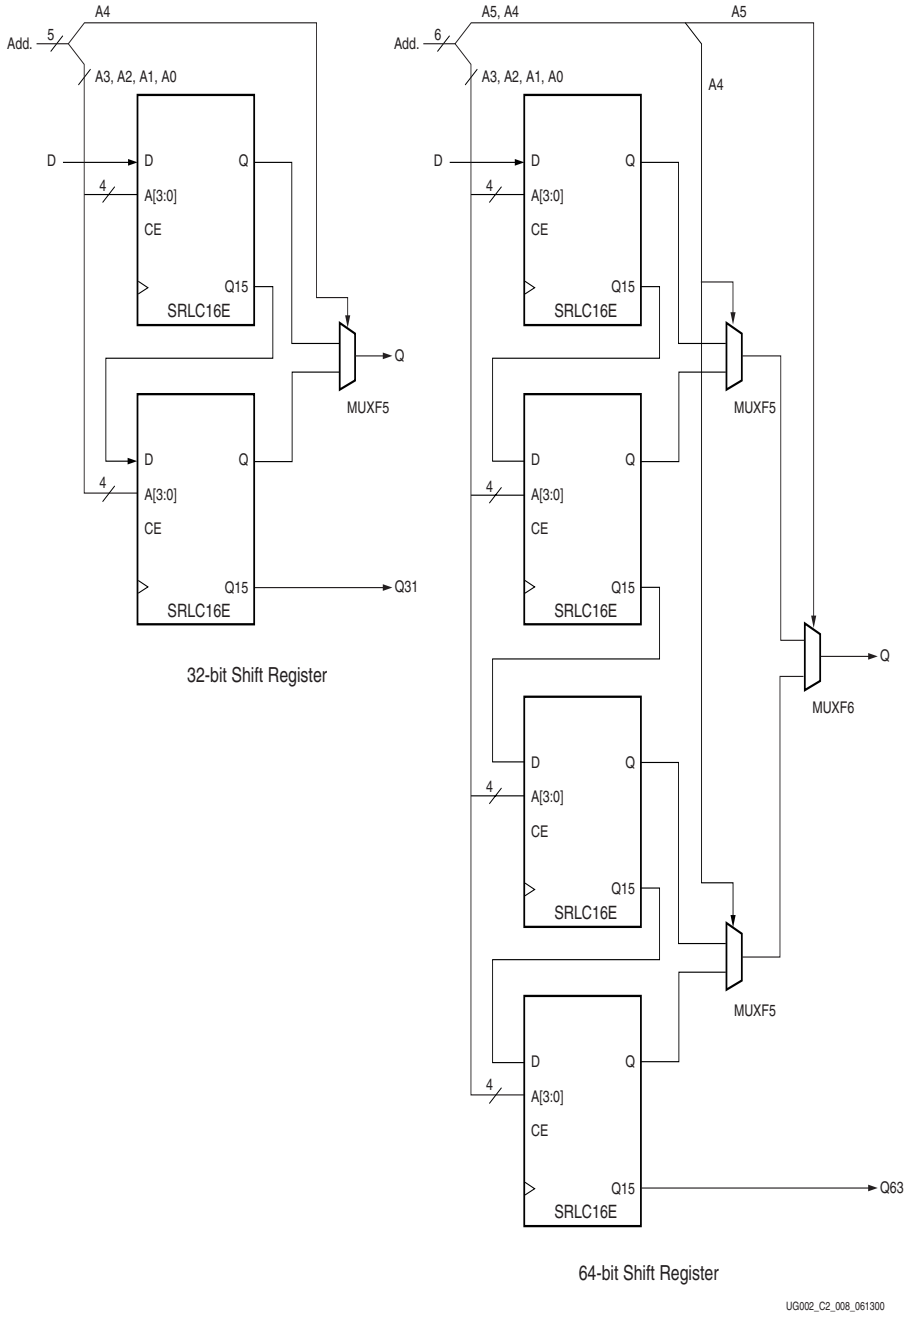


Figure 3-60: **Shift-Register Submodules (32-bit, 64-bit)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 152/94
Ex. 1012
CISCO SYSTEMS, INC. / Page 152 of 947

A 128-bit shift register is built on the same scheme and uses MUXF7 (address input A6).

All clock enable (CE) and clock (CLK) inputs are connected to one global clock enable and one clock signal per submodule. If a global static- or dynamic-length mode is not required, the SRLC16E primitive can be cascaded without multiplexers.

Initialization in VHDL and Verilog Code

A shift register can be initialized in VHDL or Verilog code for both synthesis and simulation. For synthesis, the attribute is attached to the 16-bit shift register instantiation and is copied in the EDIF output file to be compiled by Xilinx Alliance Series tools. The VHDL code simulation uses a `generic` parameter to pass the attributes. The Verilog code simulation uses a `defparam` parameter to pass the attributes.

The V2_SRL16E shift register instantiation code examples (in VHDL and Verilog) illustrate these techniques ("VHDL and Verilog Templates," page 153). V2_SRL16E .vhd and .v files are not a part of the documentation.

Port Signals

Clock - CLK

Either the rising edge or the falling edge of the clock is used for the synchronous shift-in. The data and clock enable input pins have set-up times referenced to the chosen edge of CLK.

Data In - D

The data input provides new data (one bit) to be shifted into the shift register.

Clock Enable - CE (optional)

The clock enable pin affects shift functionality. An inactive clock enable pin does not shift data into the shift register and does not write new data. Activating the clock enable allows the data in (D) to be written to the first location and all data to be shifted by one location. When available, new data appears on output pins (Q) and the cascadable output pin (Q15).

Address - A0, A1, A2, A3

Address inputs select the bit (range 0 to 15) to be read. The nth bit is available on the output pin (Q). Address inputs have no effect on the cascadable output pin (Q15), which is always the last bit of the shift register (bit 15).

Data Out - Q

The data output Q provides the data value (1 bit) selected by the address inputs.

Data Out - Q15 (optional)

The data output Q15 provides the last bit value of the 16-bit shift register. New data becomes available after each shift-in operation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 153/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 153 of 947

Inverting Control Pins

The two control pins (CLK, CE) have an individual inversion option. The default is the rising clock edge and active High clock enable.

GSR

The global set/reset (GSR) signal has no impact on shift registers.

Attributes

Content Initialization - INIT

The INIT attribute defines the initial shift register contents. The INIT attribute is a hex-encoded bit vector with four digits (0000).The left-most hexadecimal digit is the most significant bit. By default the shift register is initialized with all zeros during the device configuration sequence, but any other configuration value can be specified.

Location Constraints

Each CLB resource has four slices: S0, S1, S2, and S3. As an example, in the bottom left CLB resource, each slice has the coordinates shown in Table 3-22.

Table 3-22: **Slice Coordinates in the Bottom-Left CLB Resource**

Slice S3	Slice S2	Slice S1	Slice S0
X1Y1	X1Y0	X0Y1	X0Y0

To constrain placement, shift register instances can have LOC properties attached to them. Each 16-bit shift register fits in one LUT.

A 32-bit shift register in static or dynamic address mode fits in one slice (two LUTs and one MUXF5). This shift register can be placed in any slice.

A 64-bit shift register in static or dynamic address mode fits in two slices. These slices are either S0 and S1, or S2 and S3. Figure 3-61 illustrates the position of the four slices in a CLB resource.

The dedicated CLB shift chain runs from the top slice to the bottom slice. The data input pin must either be in slice S1 or in S3. The address selected as the output pin (Q) is the MUXF6 output.

A 128-bit shift register in static or dynamic address mode fits in a four-slice CLB resource. The data input pin has to be in slice S3. The address selected as the output pin (Q) is the MUXF7 output.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 154 of 947

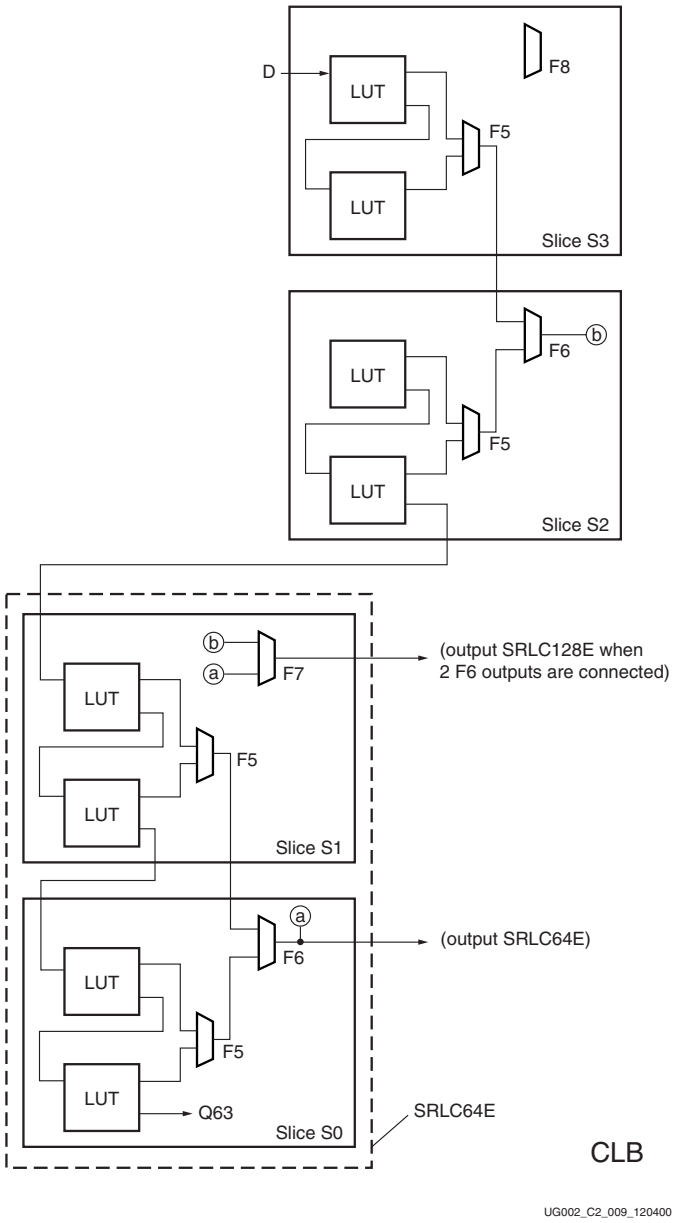


Figure 3-61: **Shift Register Placement**

Fully Synchronous Shift Registers

All shift-register primitives and submodules do not use the register(s) available in the same slice(s). To implement a fully synchronous read and write shift register, output pin Q must be connected to a flip-flop. Both the shift register and the flip-flop share the same clock, as shown in Figure 3-62.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 155 of 947

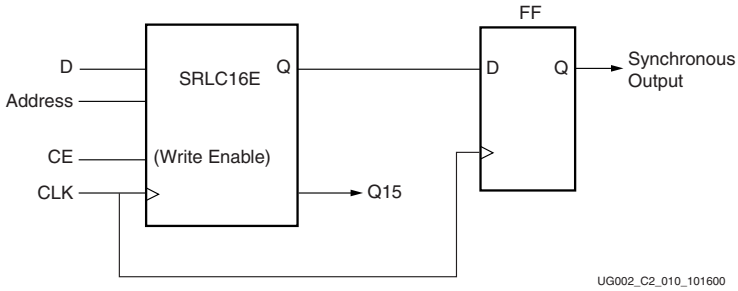


Figure 3-62: **Fully Synchronous Shift Register**

This configuration provides a better timing solution and simplifies the design. Because the flip-flop must be considered to be the last register in the shift-register chain, the static or dynamic address should point to the desired length minus one. If needed, the cascadable output can also be registered in a flip-flop.

Static-Length Shift Registers

The cascadable16-bit shift register implements any static length mode shift register without the dedicated multiplexers (MUXF5, MUXF6,…). Figure 3-63 illustrates a 40-bit shift register. Only the last SRLC16E primitive needs to have its address inputs tied to "0111". Alternatively, shift register length can be limited to 39 bits (address tied to "0110") and a flip-flop can be used as the last register. (In an SRLC16E primitive, the shift register length is the address input + 1.)

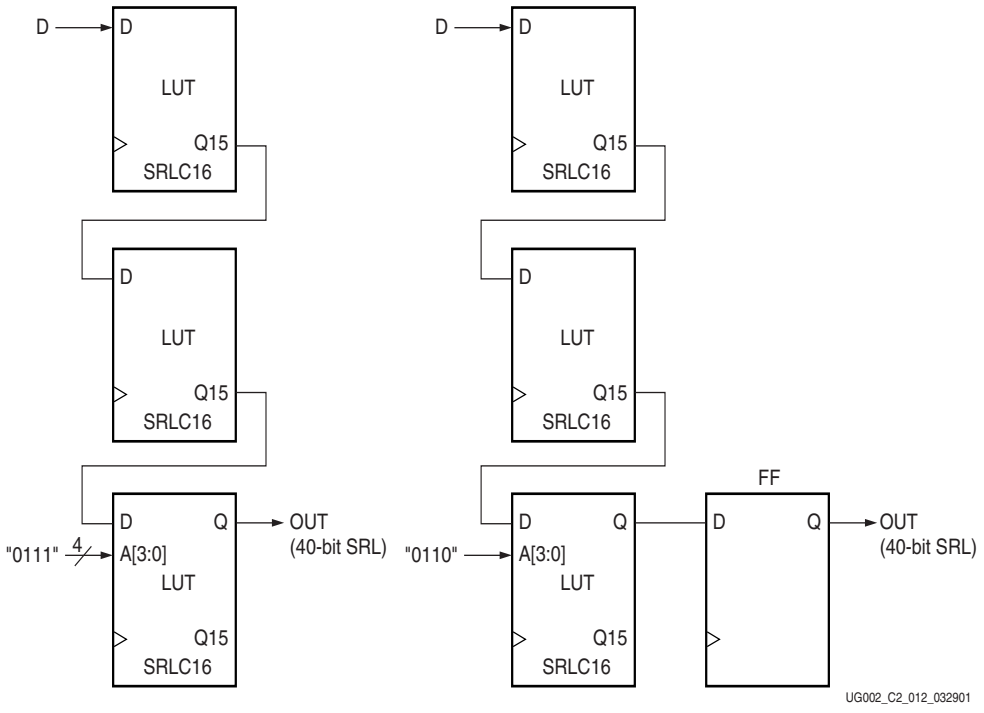


Figure 3-63: **40-bit Static-Length Shift Register**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 156/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 156 of 947

VHDL and Verilog Instantiation

VHDL and Verilog instantiation templates are available in the Libraries Guide for all primitives and submodules.

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

The ShiftRegister_C_x (with x = 16, 32, 64, 128, or 256) templates are cascadable modules and instantiate the corresponding SRLCxE primitive (16) or submodule (32, 64, 128, or 256).

The ShiftRegister_16 template can be used to instantiate an SRL16 primitive.

VHDL and Verilog Templates

In template names, the number indicates the number of bits (for example, SHIFT_REGISTER_16 is the template for the 16-bit shift register) and the "C" extension means the template is cascadable.

The following are templates for primitives:

- SHIFT_REGISTER_16
- SHIFT_REGISTER_16_C

The following are templates for submodules:

- SHIFT_REGISTER_32_C (submodule: SRLC32E_SUBM)
- SHIFT_REGISTER_64_C (submodule: SRLC64E_SUBM)
- SHIFT_REGISTER_128_C (submodule: SRLC128E_SUBM)

The corresponding submodules have to be synthesized with the design.

Templates for the SHIFT_REGISTER_16_C module are provided in VHDL and Verilog code as an example.

VHDL Template:

```
-- Module: SHIFT_REGISTER_C_16
-- Description: VHDL instantiation template
--  CASCADABLE 16-bit shift register with enable (SRLC16E)
-- Device: Virtex-II Pro Family
----------------------------------------------------------------------
-- Components Declarations:
--
component SRLC16E
-- pragma translate_off
  generic (
-- Shift Register initialization ("0" by default) for functional
simulation:
        INIT : bit_vector := X"0000"
  );
-- pragma translate_on
  port (
        D : in std_logic;
        CE   : in std_logic;
        CLK  : in std_logic;
        A0   : in std_logic;
        A1   : in std_logic;
        A2   : in std_logic;
        A3   : in std_logic;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 157/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 157 of 947

```
        Q    : out std_logic;
        Q15  : out std_logic
  );
end component;
-- Architecture  Section:
--
-- Attributes for Shift Register initialization (“0” by default):
attribute INIT: string;
--
attribute INIT of U_SRLC16E: label is “0000”;
--
-- ShiftRegister Instantiation
U_SRLC16E: SRLC16E
  port map (
  D      => , -- insert input signal
  CE     => , -- insert Clock Enable signal (optional)
  CLK    => , -- insert Clock signal
  A0     => , -- insert Address 0 signal
  A1     => , -- insert Address 1 signal
  A2     => , -- insert Address 2 signal
  A3     => , -- insert Address 3 signal
  Q      => , -- insert output signal
  Q15    =>   -- insert cascadable output signal
  );
```

Verilog Template:

```
// Module: SHIFT_REGISTER_16
// Description: Verilog instantiation template
// Cascadable 16-bit Shift Register with Clock Enable (SRLC16E)
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------
// Syntax for Synopsys FPGA Express
// synopsys translate_off

  defparam

//Shift Register initialization ("0" by default) for functional
simulation:
  U_SRLC16E.INIT = 16'h0000;
// synopsys translate_on

//SelectShiftRegister-II Instantiation
   SRLC16E U_SRLC16E   ( .D(),
                         .A0(),
                         .A1(),
                         .A2(),
                        .A3(),
                         .CLK(),
                         .CE(),
                         .Q(),
                        .Q15()
          );

// synthesis attribute declarations
  /* synopsys attribute
  INIT "0000"
  */
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 158 of 947

Large Multiplexers

Introduction

Virtex-II Pro slices contain dedicated two-input multiplexers (one MUXF5 and one MUXFX per slice). These multiplexers combine the 4-input LUT outputs or the outputs of other multiplexers. Using the multiplexers MUXF5, MUXF6, MUXF7 and MUXF8 allows to combine 2, 4, 8 and 16 LUTs. Specific routing resources are associated with these 2-input multiplexers to guarantee a fast implementation of any combinatorial function built upon LUTs and MUXFX.

The combination of the LUTs and the MUXFX offers an unique solution to the design of wide-input functions. This section illustrates the implementation of large multiplexers up to 32:1. Any Virtex-II Pro slice can implement a 4:1 multiplexer, any CLB can implement a 16:1 multiplexer, and 2 CLBs can implement a 32:1 multiplexer. Such multiplexers are just one example of wide-input combinatorial function taking advantage of the MUXFX feature. Many other logic functions can be mapped in the LUT and MUXFX features.

This section provides generic VHDL and Verilog reference code implementing multiplexers. These submodules are built from LUTs and the dedicated MUXF5, MUXF6, MUXF7, and MUXF8 multiplexers. To automatically generate large multiplexers using these dedicated elements, use the CORE Generator Bit Multiplexer and Bus Multiplexer modules.

For applications like comparators, encoder-decoders or “case” statement in VHDL or Verilog, these resources offer an optimal solution.

Virtex-II Pro CLB Resources

Slice Multiplexers

Each Virtex-II Pro slice has a MUXF5 to combine the outputs of the 2 LUTs and an extra MUXFX. Figure 3-64 illustrates any single combinatorial function with up to 5 inputs, or in some functions up to 9 inputs, within one slice.

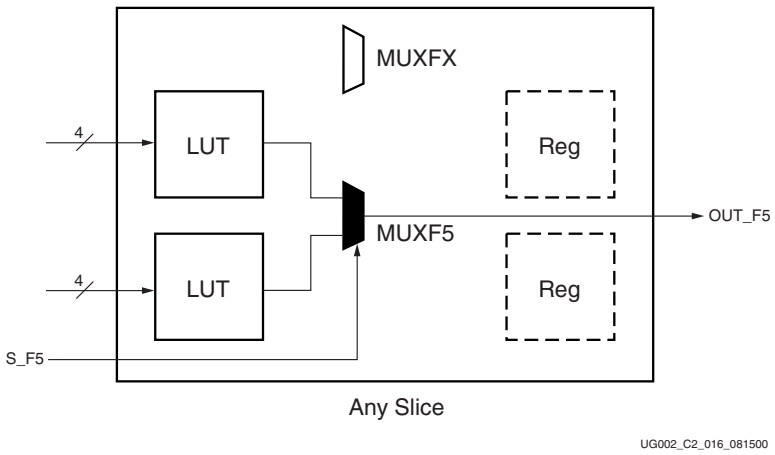


Figure 3-64: **LUTs and MUXF5 in a Slice**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 159/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 159 of 947

Each Virtex-II Pro CLB contains 4 slices. The second MUXFX implements a MUXF6, MUXF7 or MUXF8 according to the position of the slice in the CLB. These MUXFX are designed to allow LUTs combination up to 16 LUTs in two adjacent CLBs.

Figure 3-65 shows the relative position of the slices in the CLB.

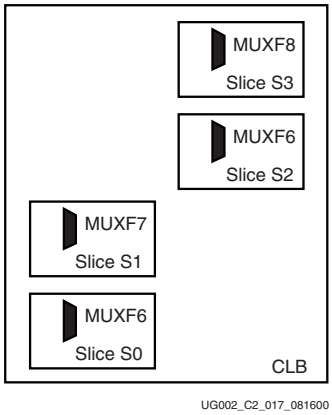


Figure 3-65: **Slice Positions in a CLB**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 160 of 947

Slices S0 and S2 have a MUXF6, designed to combine the outputs of two MUXF5 resources. Figure 3-66 illustrates any single combinatorial function up to 6 inputs, or in some functions up to 18 inputs, in slices S0 and S1, or in slices S2 and S3.

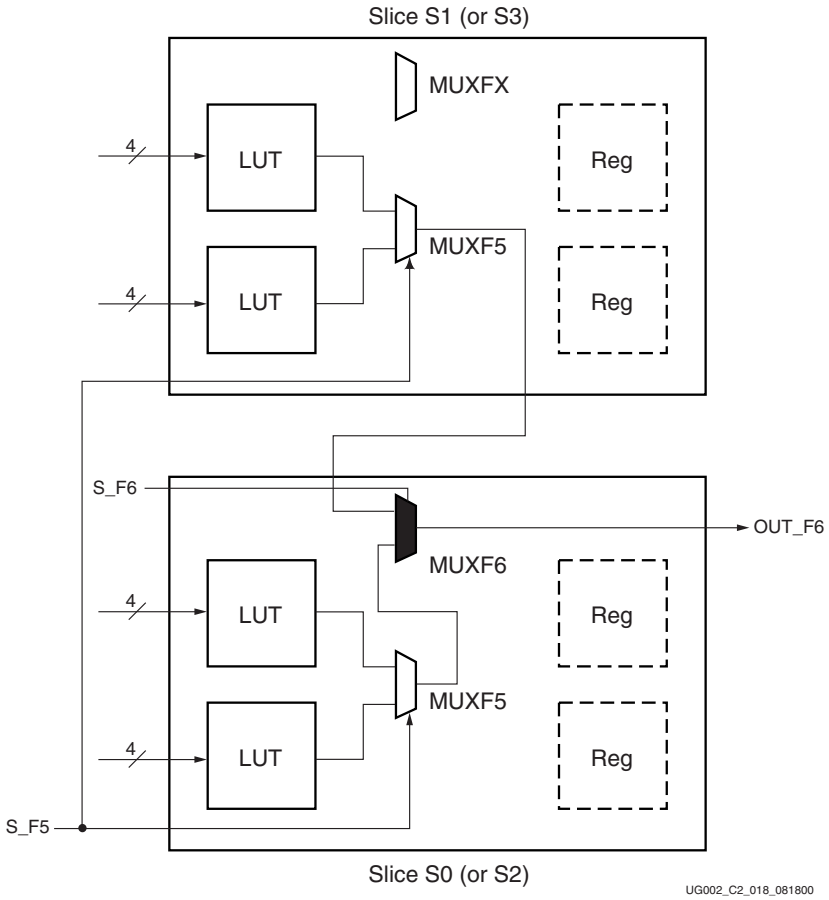


Figure 3-66: **LUTs and (MUXF5 and MUXF6) in Two Slices**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 161 of 947

The slice S1 has a MUXF7, designed to combine the outputs of two MUXF6. Figure 3-67 illustrates any single combinatorial function up to 7 inputs, or in some functions up to 35 inputs, in a Virtex-II CLB.

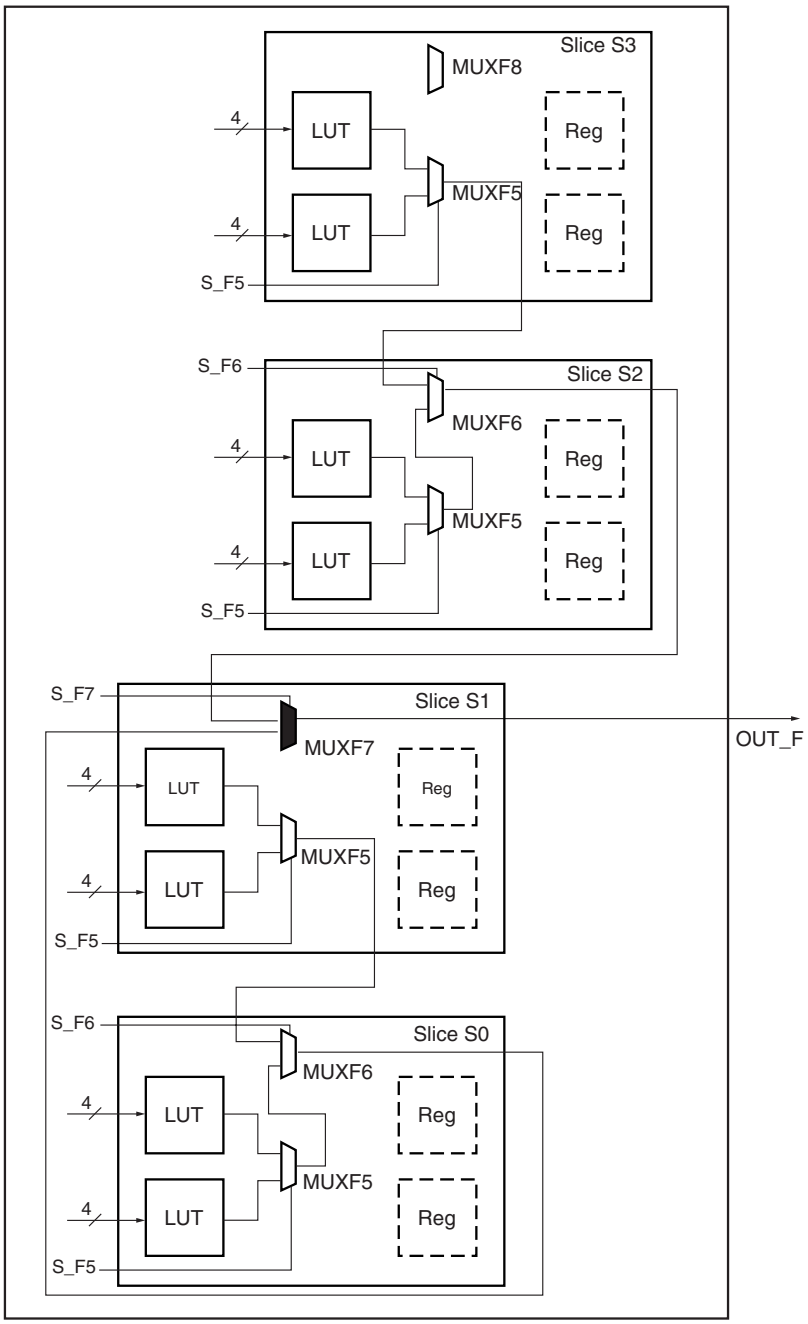


Figure 3-67: **LUTs and (MUXF5, MUXF6, and MUXF7) in One CLB**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 162/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 162 of 947

The slice S3 of each CLB has a MUXF8. Any single combinatorial functions of up to 8 inputs, or some functions up to 68 inputs, fit in two CLBs as shown in Figure 3-68. The outputs of two MUXF7 are combined through dedicated routing resources between two adjacent CLBs in a column.

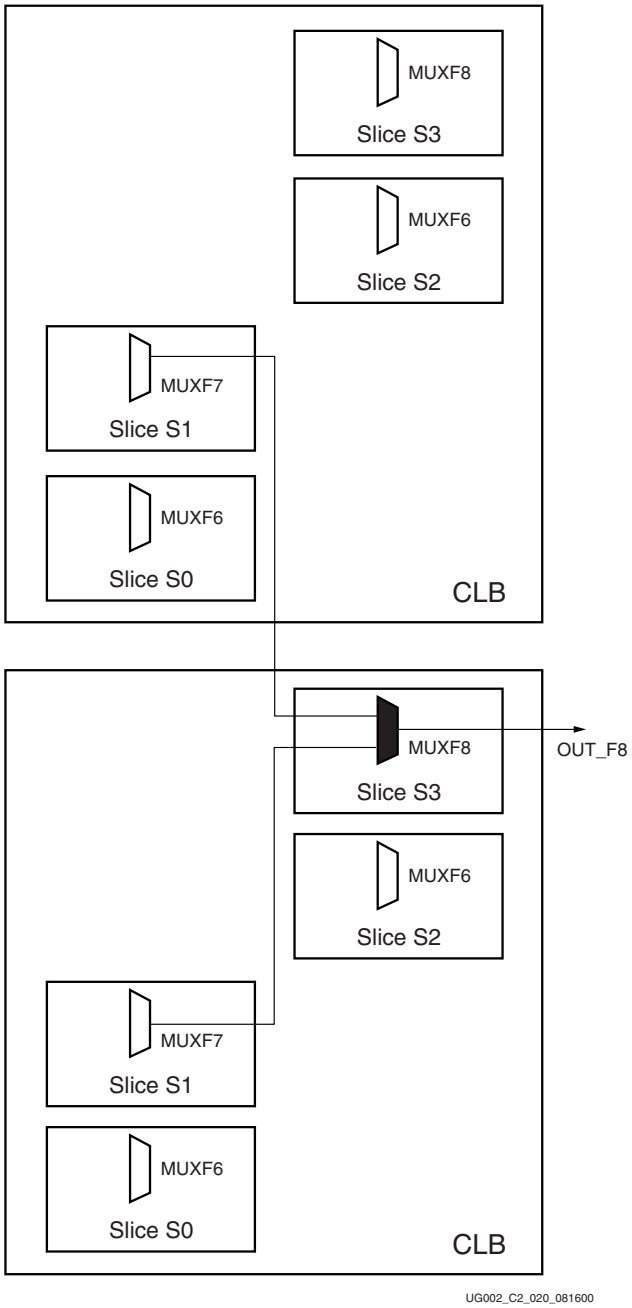


Figure 3-68: **MUXF8 Combining Two Adjacent CLBs**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 163 of 947

Wide-Input Multiplexers

Each LUT can implement a 2:1 multiplexer. In each slice, the MUXF5 and two LUTs can implement a 4:1 multiplexer. As shown in Figure 3-69, the MUXF6 and two slices can implement a 8:1 multiplexer. The MUFXF7 and the four slices of any CLB can implement a 16:1 and the MUXF8 and two CLBs can implement a 32:1 multiplexer.

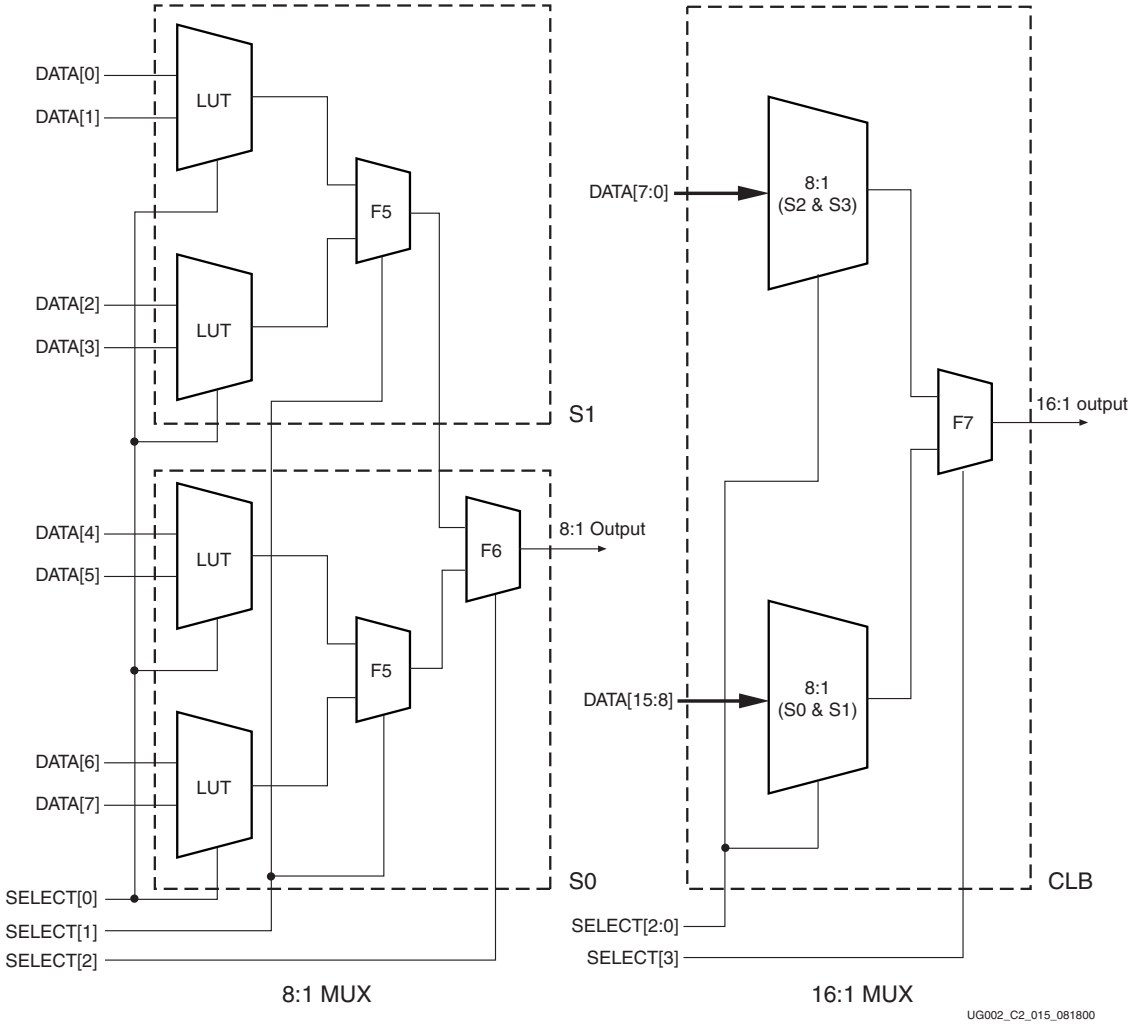


Figure 3-69: **8:1 and 16:1 Multiplexers**

Characteristics

- Implementation in one level of logic (LUT) and dedicated MUXFX
- Full combinatorial path

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 164/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 164 of 947

Library Primitives and Submodules

Four library primitives are available that offer access to the dedicated MUXFX in each slice.

In the example shown in Table 3-23, MUXF7 is available only in slice S1.

Table 3-23: **MUXFX Resources**

Primitive	Slice	Control	Input	Output
MUXF5	S0, S1, S2, S3	S	I0, I1	O
MUXF6	S0, S2	S	I0, I1	O
MUXF7	S1	S	I0, I1	O
MUXF8	S3	S	I0, I1	O

In addition to the primitives, five submodules that implement multiplexers from 2:1 to 32:1 are provided in VHDL and Verilog code. Synthesis tools can automatically infer the above primitives (MUXF5, MUXF6, MUXF7, and MUXF8); however, the submodules described in this section used instantiation of the new MUXFX to guarantee an optimized result. Table 3-24 lists available submodules:

Table 3-24: **Available Submodules**

Submodule	Multiplexer	Control	Input	Output
MUX_2_1_SUBM	2:1	SELECT_I	DATA_I[1:0]	DATA_O
MUX_4_1_SUBM	4:1	SELECT_I[1:0]	DATA_I[3:0]	DATA_O
MUX_8_1_SUBM	8:1	SELECT_I[2:0]	DATA_I[8:0]	DATA_O
MUX_16_1_SUBM	16:1	SELECT_I[3:0]	DATA_I[15:0]	DATA_O
MUX_32_1_SUBM	32:1	SELECT_I[4:0]	DATA_I[31:0]	DATA_O

Port Signals

Data In - DATA_I

The data input provides the data to be selected by the SELECT_I signal(s).

Control In - SELECT_I

The select input signal or bus determines the DATA_I signal to be connected to the output DATA_O. For example, the MUX_4_1_SUBM multiplexer has a 2-bit SELECT_I bus and a 4-bit DATA_I bus. Table 3-25 shows the DATA_I selected for each SELECT_I value.

Table 3-25: **Selected Inputs**

SELECT_I[1:0]	DATA_O
0 0	DATA_I[0]
0 1	DATA_I[1]
1 0	DATA_I[2]
1 1	DATA_I[3]

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 165 of 947

Data Out - DATA_O

The data output O provides the data value (1 bit) selected by the control inputs.

Applications

Multiplexers are used in various applications. These are often inferred by synthesis tools when a "case" statement is used (see the example below). Comparators, encoder-decoders and wide-input combinatorial functions are optimized when they are based on one level of LUTs and dedicated MUXFX resources of the Virtex-II Pro CLBs.

VHDL and Verilog Instantiation

The primitives (MUXF5, MUXF6, and so forth) can be instantiated in VHDL or Verilog code, to design wide-input functions.

The submodules (MUX_2_1_SUBM, MUX_4_1_SUBM, and so forth) can be instantiated in VHDL or Verilog code to implement multiplexers. However the corresponding submodule must be added to the design directory as hierarchical submodule. For example, if a module is using the MUX_16_1_SUBM, the MUX_16_1_SUBM.vhd file (VHDL code) or MUX_16_1_SUBM.v file (Verilog code) must be compiled with the design source code. The submodule code can also be "cut and pasted" into the designer source code.

VHDL and Verilog Submodules

VHDL and Verilog submodules are available to implement multiplexers up to 32:1. They illustrate how to design with the MUXFX resources. When synthesis infers the corresponding MUXFX resource(s), the VHDL or Verilog code is behavioral code ("case" statement). Otherwise, the equivalent "case" statement is provided in comments and the correct MUXFX are instantiated. However, most synthesis tools support the inference of all of the MUXFX. The following examples can be used as guidelines for designing other wide-input functions.

The following submodules are available:

- MUX_2_1_SUBM (behavioral code)
- MUX_4_1_SUBM
- MUX_8_1_SUBM
- MUX_16_1_SUBM
- MUX_32_1_SUBM

The corresponding submodules have to be synthesized with the design

The submodule MUX_16_1_SUBM in VHDL and Verilog are provided as example.

VHDL Template

```
-- Module: MUX_16_1_SUBM
-- Description: Multiplexer 16:1
--
-- Device: Virtex-II Pro Family
--------------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;

-- Syntax for Synopsys FPGA Express
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 166 of 947

```
-- pragma translate_off
library UNISIM;
use UNISIM.VCOMPONENTS.ALL;
-- pragma translate_on

entity MUX_16_1_SUBM is
    port (
        DATA_I: in std_logic_vector (15 downto 0);
        SELECT_I: in std_logic_vector (3 downto 0);
        DATA_O: out std_logic
  );
end MUX_16_1_SUBM;

architecture MUX_16_1_SUBM_arch of MUX_16_1_SUBM is
-- Component Declarations:
component MUXF7
    port (
    I0: in std_logic;
    I1: in std_logic;
    S: in std_logic;
    O: out std_logic
    );
end component;
--
-- Signal Declarations:
signal DATA_MSB : std_logic;
signal DATA_LSB : std_logic;
--
begin
--
-- If synthesis tools support MUXF7 :
--SELECT_PROCESS: process (SELECT_I, DATA_I)
--begin
--case SELECT_I is
--  when "0000" => DATA_O <= DATA_I (0);
--  when "0001" => DATA_O <= DATA_I (1);
--  when "0010" => DATA_O <= DATA_I (2);
--  when "0011" => DATA_O <= DATA_I (3);
--  when "0100" => DATA_O <= DATA_I (4);
--  when "0101" => DATA_O <= DATA_I (5);
--  when "0110" => DATA_O <= DATA_I (6);
--  when "0111" => DATA_O <= DATA_I (7);
--  when "1000" => DATA_O <= DATA_I (8);
--  when "1001" => DATA_O <= DATA_I (9);
--  when "1010" => DATA_O <= DATA_I (10);
--  when "1011" => DATA_O <= DATA_I (11);
--  when "1100" => DATA_O <= DATA_I (12);
--  when "1101" => DATA_O <= DATA_I (13);
--  when "1110" => DATA_O <= DATA_I (14);
--  when "1111" => DATA_O <= DATA_I (15);
--  when others => DATA_O <= 'X';
--end case;
--end process SELECT_PROCESS;
--
-- If synthesis tools DO NOT support MUXF7 :
SELECT_PROCESS_LSB: process (SELECT_I, DATA_I)
begin
  case SELECT_I (2 downto 0) is
    when  "000" => DATA_LSB <= DATA_I (0);
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 167 of 947

```
    when  "001" => DATA_LSB <= DATA_I (1);
    when  "010" => DATA_LSB <= DATA_I (2);
    when  "011" => DATA_LSB <= DATA_I (3);
    when  "100" => DATA_LSB <= DATA_I (4);
    when  "101" => DATA_LSB <= DATA_I (5);
    when  "110" => DATA_LSB <= DATA_I (6);
    when  "111" => DATA_LSB <= DATA_I (7);
    when others => DATA_LSB <= 'X';
  end case;
end process SELECT_PROCESS_LSB;
--
SELECT_PROCESS_MSB: process (SELECT_I, DATA_I)
begin
  case SELECT_I (2 downto 0) is
    when  "000" => DATA_MSB <= DATA_I (8);
    when  "001" => DATA_MSB <= DATA_I (9);
    when  "010" => DATA_MSB <= DATA_I (10);
    when  "011" => DATA_MSB <= DATA_I (11);
    when  "100" => DATA_MSB <= DATA_I (12);
    when  "101" => DATA_MSB <= DATA_I (13);
    when  "110" => DATA_MSB <= DATA_I (14);
    when  "111" => DATA_MSB <= DATA_I (15);
    when others => DATA_MSB <= 'X';
  end case;
end process SELECT_PROCESS_MSB;
--
-- MUXF7 instantiation
U_MUXF7: MUXF7
    port map (
    I0 => DATA_LSB,
    I1 => DATA_MSB,
    S  => SELECT_I (3),
    O  => DATA_O
    );
--
end MUX_16_1_SUBM_arch;
--
```

Verilog Template

```
// Module: MUX_16_1_SUBM
//
// Description: Multiplexer 16:1
// Device: Virtex-II Pro Family
//-----------------------------------------------------------------------
//
module MUX_16_1_SUBM (DATA_I, SELECT_I, DATA_O);

input [15:0]DATA_I;
input [3:0]SELECT_I;

output DATA_O;

wire [2:0]SELECT;

reg DATA_LSB;
reg DATA_MSB;

assign SELECT[2:0] = SELECT_I[2:0];
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 168 of 947

```
/*
//If synthesis tools supports MUXF7 :
always @ (DATA_I or SELECT_I)

    case (SELECT_I)
  4'b0000 : DATA_O <= DATA_I[0];
  4'b0001 : DATA_O <= DATA_I[1];
  4'b0010 : DATA_O <= DATA_I[2];
  4'b0011 : DATA_O <= DATA_I[3];
  4'b0100 : DATA_O <= DATA_I[4];
  4'b0101 : DATA_O <= DATA_I[5];
  4'b0110 : DATA_O <= DATA_I[6];
  4'b0111 : DATA_O <= DATA_I[7];
  4'b1000 : DATA_O <= DATA_I[8];
  4'b1001 : DATA_O <= DATA_I[9];
  4'b1010 : DATA_O <= DATA_I[10];
  4'b1011 : DATA_O <= DATA_I[11];
  4'b1100 : DATA_O <= DATA_I[12];
  4'b1101 : DATA_O <= DATA_I[13];
  4'b1110 : DATA_O <= DATA_I[14];
  4'b1111 : DATA_O <= DATA_I[15];
  default : DATA_O <= 1'bx;
    endcase
*/

always @ (SELECT or DATA_I)

    case (SELECT)
  3'b000 : DATA_LSB <= DATA_I[0];
  3'b001 : DATA_LSB <= DATA_I[1];
  3'b010 : DATA_LSB <= DATA_I[2];
  3'b011 : DATA_LSB <= DATA_I[3];
  3'b100 : DATA_LSB <= DATA_I[4];
  3'b101 : DATA_LSB <= DATA_I[5];
  3'b110 : DATA_LSB <= DATA_I[6];
  3'b111 : DATA_LSB <= DATA_I[7];
  default : DATA_LSB <= 1'bx;
    endcase

always @ (SELECT or DATA_I)

    case (SELECT)
  3'b000 : DATA_MSB <= DATA_I[8];
  3'b001 : DATA_MSB <= DATA_I[9];
  3'b010 : DATA_MSB <= DATA_I[10];
  3'b011 : DATA_MSB <= DATA_I[11];
  3'b100 : DATA_MSB <= DATA_I[12];
  3'b101 : DATA_MSB <= DATA_I[13];
  3'b110 : DATA_MSB <= DATA_I[14];
  3'b111 : DATA_MSB <= DATA_I[15];
  default : DATA_MSB <= 1'bx;
    endcase

// MUXF7 instantiation

MUXF7 U_MUXF7   (.I0(DATA_LSB),
     .I1(DATA_MSB),
     .S(SELECT_I[3]),
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 169 of 947

```
      .O(DATA_O)
      );
endmodule

//
*/
```

Sum of Products (SOP) Logic

Introduction

Virtex-II Pro slices contain a dedicated two-input multiplexer (MUXCY) and a two-input OR gate (ORCY) to perform operations involving wide AND and OR gates. These combine the four-input LUT outputs. These gates can be cascaded in a chain to provide the wide AND functionality across slices. The output from the cascaded AND gates can then be combined with the dedicated ORCY to produce the Sum of Products (SOP).

Virtex-II Pro CLB Resources

Each Virtex-II Pro slice has a MUXCY, which uses the output from the LUTs as a SELECT signal. Depending on the width of data desired, several slices can be used to provide the SOP output. Figure 3-70 illustrates the logic involved in designing a 16-input AND gate. It utilizes the 4-input LUT to provide the necessary SELECT signal for the MUXCY. Only when all of the input signals are High, can the V_{CC} at the bottom reach the output. This use of carry logic helps to perform AND functions at high speed and saves logic resources.

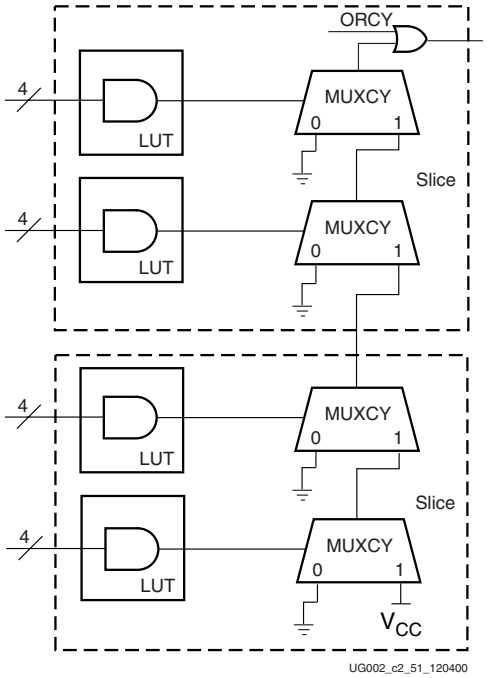


Figure 3-70: **Implementing a 16-bit Wide AND Gate Using MUXCY & ORCY**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 170 of 947

The output from the chain of AND gates is passed as one of the inputs of the dedicated OR gate, ORCY. To calculate the SOP, these AND chains can be cascaded vertically across several CLBs, depending on the width of the input data. Figure 3-71 illustrates how the AND outputs are then passed in through the ORCY gates in a horizontal cascade, the sum of which is the Sum of Products.

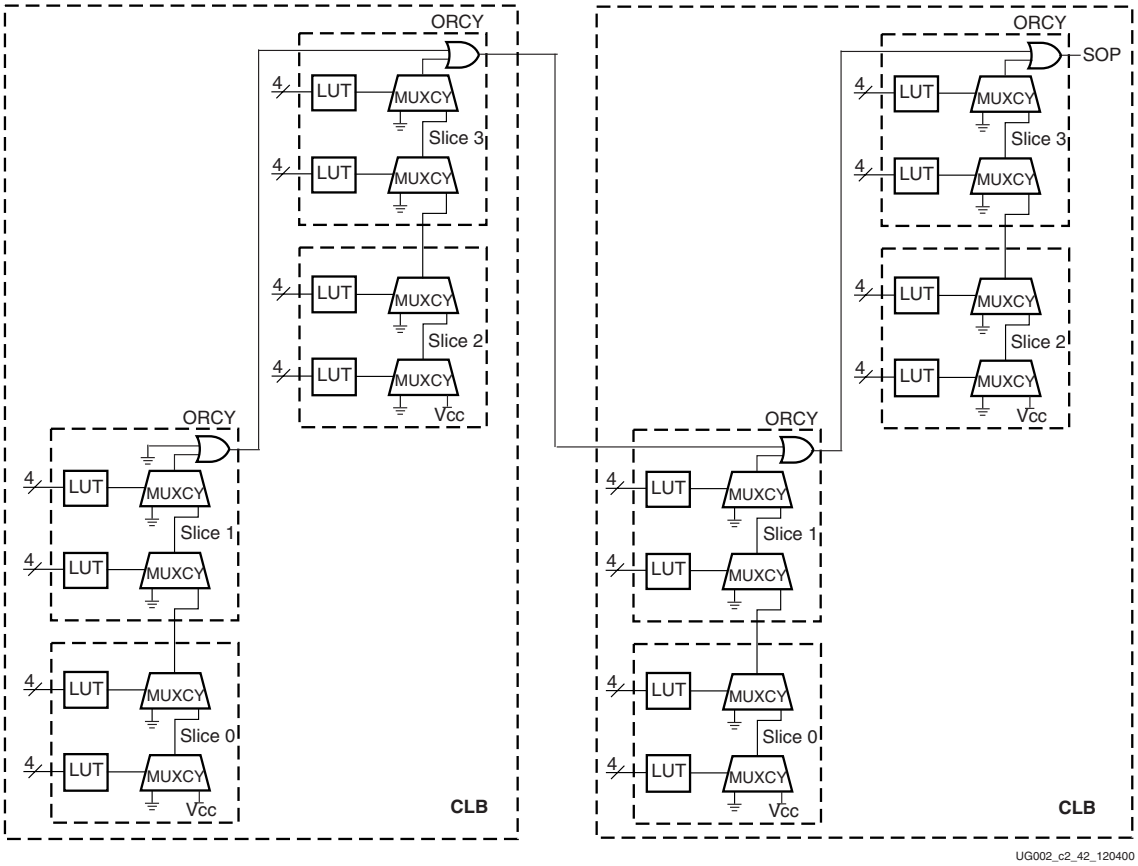


Figure 3-71: **64-bit Input SOP Design**

VHDL Parameters

AND_WIDTH Parameter

The width of each AND gate used in the cascade.

PROD_TERM Parameter

The number of AND gates used along each vertical cascade.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 171 of 947

AND_IN Parameter

Data input to the AND gates. The total width of data is calculated from the product of AND_WIDTH and PROD_TERM

SOP_OUT Parameter

The Sum of Products (SOP) output data from the cascade chain.

Applications

These logic gates can be used in various applications involving very wide AND gates and Sum of Products (SOP) functions.

VHDL and Verilog Instantiation

To implement wide-input AND functions, MUXCY and ORCY primitives can be instantiated in VHDL or Verilog code. The submodule code provided can be used to implement wide-input AND gates for any width of input data.

VHDL and Verilog Submodules

VHDL and Verilog submodules are available to implement the cascade chain of wide-input AND gates and OR gates to calculate the Sum of Products (SOP). The VHDL module provided uses a generic case, where the width of data and the product terms can be specified in the case. The Verilog module provides a 64-bit input example, using four wide AND chains, each of which handle 16 bits of data.

VHDL Templates

```
-- Module : AND_CHAIN
-- Description : 16 input AND gate
--
-- Device : Virtex-II Pro Family
--------------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;
--library UNISIM;
--use UNISIM.VCOMPONENTS.ALL;

entity AND_CHAIN is
 generic (
    input_width : integer); --must be a 4x value
 port (
    data_in : in std_logic_vector( input_width-1 downto 0);
    carry_in : in std_logic;
    out_andor_chain : out std_logic);
end AND_CHAIN;

architecture AND_CHAIN_arch of AND_CHAIN is

component ORCY
  port( i : std_logic;
        ci : in std_logic;
        o : out std_logic);
end component;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 172 of 947

```
component AND_LOGIC
  port( sel_data : in std_logic_vector(3 downto 0);
        data_cin : in std_logic;
        data_out : out std_logic);
end component;

signal VCC, GND : std_logic;
signal cout : std_logic_vector(input_width/4 downto 0);
signal out_and_chain : std_logic;

begin

VCC <= '1';
GND <= '0';

--initialization of first input for MUXCY
cout(0) <= VCC;

and_chain_x : for i in (input_width/4) - 1 downto 0 generate
  AND_LOGIC_inst : AND_LOGIC
        port map (
           sel_data => data_in((4 * i + 3) downto (4 * i)),
           data_cin => cout(i),
           data_out => cout(i + 1));
end generate;

out_and_chain <= cout(input_width/4);

orcy_inst : ORCY
  port map( i => out_and_chain,
        ci => carry_in,
        o => out_andor_chain);

end AND_CHAIN_arch;

----------------------------------------------------------------------
-- Module AND_LOGIC
-- Description : 4-input AND gate
--
-- Device : Virtex-II Pro Family
----------------------------------------------------------------------
library IEEE;
use IEEE.std_logic_1164.all;
--library UNISIM;
--use UNISIM.VCOMPONENTS.ALL;

entity AND_LOGIC is
  port(
      sel_data : in std_logic_vector(3 downto 0); -- data for select
signal for MUXCY from LUT
      data_cin : in std_logic;  -- result from previous stage
      data_out : out std_logic);
end AND_LOGIC;

architecture AND_LOGIC_arch of AND_LOGIC is

component MUXCY
 port(
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 173/94

Ex. 1012
CISCO SYSTEMS, INC. / Page 173 of 947

```
     DI : in std_logic;
     CI : in std_logic;
     s : in std_logic;
     o : out std_logic);
end component;

signal GND : std_logic;
signal sel:std_logic;

begin

GND <= '0';
sel <= sel_data(0) and sel_data(1) and sel_data(2) and sel_data(3);

--Wide AND gate using MUXCY
MUX : MUXCY
     port map (
        DI => GND,
        CI => data_cin,
        s => sel,
        o => data_out);

end AND_LOGIC_arch;

----------------------------------------------------------------------
-- Module : SOP_SUBM
-- Description : Implementing SOP using MUXCY and ORCY
--
-- Device : Virtex-II Pro Family
----------------------------------------------------------------------
library ieee;
use ieee.std_logic_1164.all;
--library UNISIM;
--use UNISIM.VCOMPONENTS.ALL;

entity SOP_SUBM is
  generic(
     and_width : integer :=16 ;
     prod_term : integer := 4 );
  port(
     and_in : in std_logic_vector(and_width * prod_term - 1 downto 0);
     sop_out : out std_logic);
end SOP_SUBM;

architecture SOP_SUBM_arch of SOP_SUBM is

component AND_CHAIN
 generic (
    input_width : integer); --must be a 4x value
 port (
    data_in : in std_logic_vector( input_width-1 downto 0);
    carry_in : in std_logic;
    out_andor_chain : out std_logic);
end component;

signal VCC, GND : std_logic;
signal carry : std_logic_vector(prod_term downto 0);

begin
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 174 of 947

```
VCC <= '1';
GND <= '0';

carry(0) <= GND;
andor_inst : for i in 0 to (prod_term - 1) generate
      and_chainx : AND_CHAIN
             generic map(
                input_width => and_width)
             port map(
              data_in => and_in((and_width * i + (and_width -1)) downto
(and_width * i)),
                carry_in => carry(i),
                out_andor_chain => carry(i + 1));
end generate;
sop_out <= carry(prod_term);

end SOP_SUBM_arch;
```

Verilog Templates

```
// Module : AND_CHAIN
// Description : 16 input AND gate
//
// Device : Virtex-II Family
//--------------------------------------------------------------------
module AND_CHAIN(data_in, carry_in, out_andor_chain);
input [15:0] data_in;
input carry_in;
output out_andor_chain;
wire VCC = 1'b1;
wire out_and_chain;
wire dat_out1, data_out2, data_out3;
AND_LOGIC_OR u4(.sel_data(data_in[15:12]), .data_cin(data_out3),
.carry_in(carry_in), .data_out(out_andor_chain));

AND_LOGIC u3(.sel_data(data_in[11:8]), .data_cin(data_out2),
.data_out(data_out3));
AND_LOGIC u2(.sel_data(data_in[7:4]), .data_cin(data_out1),
.data_out(data_out2));
AND_LOGIC u1(.sel_data(data_in[3:0]), .data_cin(VCC),
.data_out(data_out1));
endmodule

//--------------------------------------------------------------------
// Module AND_LOGIC
// Description : 4-input AND gate
//
// Device : Virtex-II Family
//--------------------------------------------------------------------
// Module : init_and
//
module AND_LOGIC(sel_data, data_cin, data_out);
input[3:0] sel_data;
input data_cin;
output data_out;
wire GND = 1'b0;
wire VCC = 1'b1;
wire and_out;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 175 of 947

```
assign and_out = sel_data[3] & sel_data[2] & sel_data[1] & sel_data[0];
MUXCY muxcy_inst (.DI(GND), .CI(data_cin), .S(and_out), .O(data_out));
endmodule

// Module AND_LOGIC + ORCY
module AND_LOGIC_OR(sel_data, data_cin, carry_in, data_out);
input[3:0] sel_data;
input data_cin;
input carry_in;
output data_out;
wire data_mux_out;
wire GND = 1'b0;
wire VCC = 1'b1;
wire and_out;
assign and_out = sel_data[3] & sel_data[2] & sel_data[1] & sel_data[0];
MUXCY muxcy_inst (.DI(GND), .CI(data_cin), .S(and_out),
.O(data_mux_out)) /* synthesis  RLOC="x0y0" */;
ORCY u5(.I(carry_in), .CI(data_mux_out), .O(data_out)) /* synthesis
RLOC="x0y0" */;
endmodule


//----------------------------------------------------------------------
// Module : SOP_SUBM
// Description : Implementing SOP using MUXCY and ORCY
//
// Device : Virtex-II Family
//----------------------------------------------------------------------
module SOP_SUBM(and_in, sop_out);
input [63:0] and_in;
output sop_out;
wire out_andor_chain1, out_andor_chain2, out_andor_chain3;
wire GND = 1'b0;
AND_CHAIN u4(.data_in(and_in[63:48]), .carry_in(out_andor_chain3),
.out_andor_chain(sop_out));
AND_CHAIN u3(.data_in(and_in[47:32]), .carry_in(out_andor_chain2),
.out_andor_chain(out_andor_chain3));
AND_CHAIN u2(.data_in(and_in[31:16]), .carry_in(out_andor_chain1),
.out_andor_chain(out_andor_chain2));
AND_CHAIN u1(.data_in(and_in[15:0]), .carry_in(GND),
.out_andor_chain(out_andor_chain1));
endmodule
```

Embedded Multipliers

Introduction

Virtex-II Pro devices feature a large number of embedded 18-bit X 18-bit two's-complement embedded multipliers. The embedded multipliers offer fast, efficient means to create 18-bit signed by 18-bit signed multiplication products. The multiplier blocks share routing resources with the Block SelectRAM memory, allowing for increased efficiency for many applications. Cascading of multipliers can be implemented with additional logic resources in local Virtex-II Pro slices.

Applications such as signed-signed, signed-unsigned, and unsigned-unsigned multiplication, logical, arithmetic, and barrel shifters, two's-complement and magnitude return are easily implemented.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 176 of 947

Using the CORE Generator, the designer can quickly generate multipliers that make use of the embedded 18-bit x 18-bit two's-complement multipliers (V2.0 or later) of the Multiplier core for Virtex-II Pro devices.

Two's-Complement Signed Multiplier

Data Flow

Each embedded multiplier block (MULT18X18 primitive) supports two independent dynamic data input ports: 18-bit signed or 17-bit unsigned. The MULT18X18 primitive is illustrated in Figure 3-72.

In addition, efficient cascading of multipliers up to 35-bit X 35-bit signed can be accomplished by using 4 embedded multipliers, one 36-bit adder, and one 53-bit adder. See Figure 3-73.

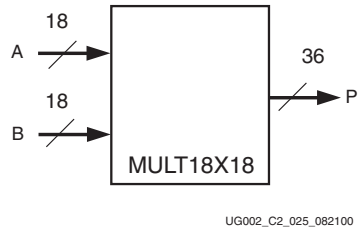


Figure 3-72: **Embedded Multiplier**

Library Primitives and Submodules

One library primitive (MULT18X18) is available. Table 3-26 lists the attributes of this primitive.

Table 3-26: **Embedded Multiplier Primitive**

Primitive	A width	B width	P width	Signed/Unsigned
MULT18X18	18	18	36	Signed (2's complement)

In addition to the primitive, 15 submodules that implement various widths of signed and unsigned multipliers and two's-complement return functions are provided in VHDL and Verilog code. Multipliers using cascaded MULT18X18 primitives are included with registers between stages causing three cycles of latency. Multipliers that make use of the embedded Virtex-II Pro 18-bit by 18-bit two's complement multipliers can be easily generated using V2.0 of the CORE Generator Multiplier module. Table 3-27 lists cascaded multiplier submodules.

Table 3-27: **Embedded Multiplier Submodules - Cascaded MULT18X18**

Submodule	A Width	B Width	P Width	Signed/Unsigned
MULT35X35_S	35	35	70	Signed
MULT34X34_U	34	34	68	Unsigned

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 177/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 177 of 947

Figure 3-73 represents the cascaded scheme used to implement a 35-bit by 35-bit signed multiplier utilizing four embedded multipliers and two adders.

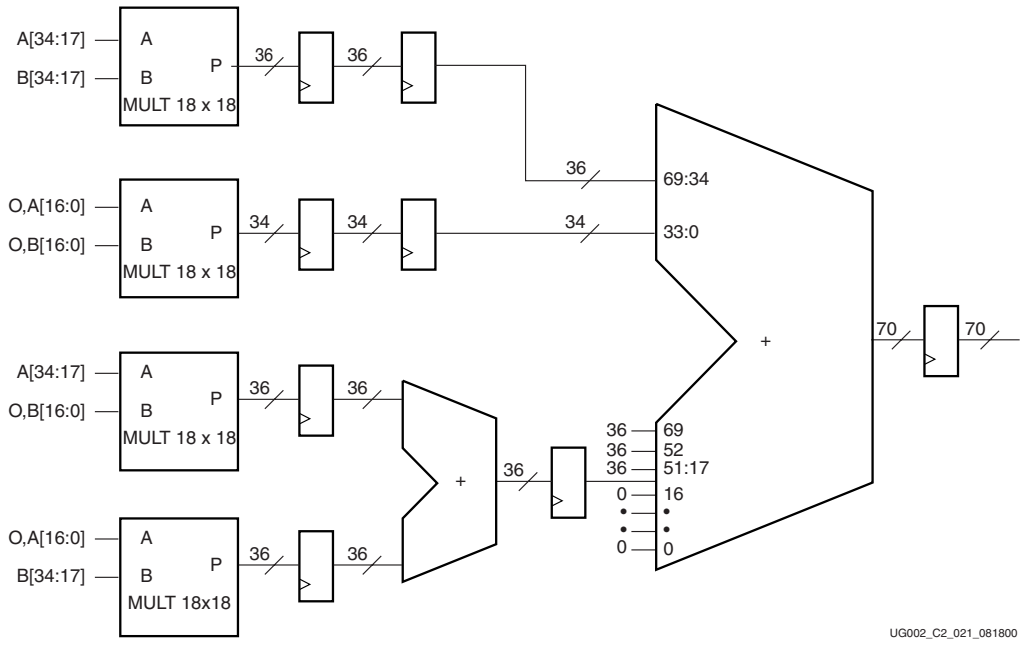


Figure 3-73: **MULT35X35_S Submodule**

The fixed adder is 53 bits wide (17 LSBs are always 0 on one input).

The 34-bit by 34-bit unsigned submodule is constructed in a similar manner with the most significant bit on each operand being tied to logic low.

Table 3-28 lists multipliers and two's-complement return functions that utilize one MULT18X18 primitive and are not registered.

Table 3-28: **Embedded Multiplier Submodules - Single MULT18X18**

Submodule	A width	B width	P width	Signed/Unsigned
MULT17X17_U	17	17	34	Unsigned
MULT8X8_S	8	8	16	Signed
MULT8X8_U	8	8	16	Unsigned
MULT4X4_S	4	4	8	Signed
MULT4X4_U	4	4	8	Unsigned
MULT_6X6S_5X5U	6 5	6 5	12 10	Signed Unsigned
MULT_5X5S_6X6U	5 6	5 6	10 12	Signed Unsigned
MULT_5X5U_5X5U	5 5	5 5	10 10	Unsigned Unsigned

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 178/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 178 of 947

Table 3-28: **Embedded Multiplier Submodules - Single MULT18X18 *(Continued)***

Submodule	A width	B width	P width	Signed/Unsigned
MULT_4X4S_7X7U	4 7	4 7	8 14	Signed Unsigned
MULT_4X4S_3X3S	4 3	4 3	8 6	Signed Signed
TWOS_CMP18	18	-	18	-
TWOS_CMP9	9	-	9	-
MAGNTD_18	18	-	17	-

Multipliers of form MULT_aXaS_bXbU use one embedded multiplier to implement two multipliers with separate outputs. The submodules listed above use optimized pin assignments to achieve shortest possible through-delay.

Figure 3-74 and Figure 3-75 represent 4-bit by 4-bit signed multiplier and 4-bit by 4-bit unsigned multiplier implementations, respectively.

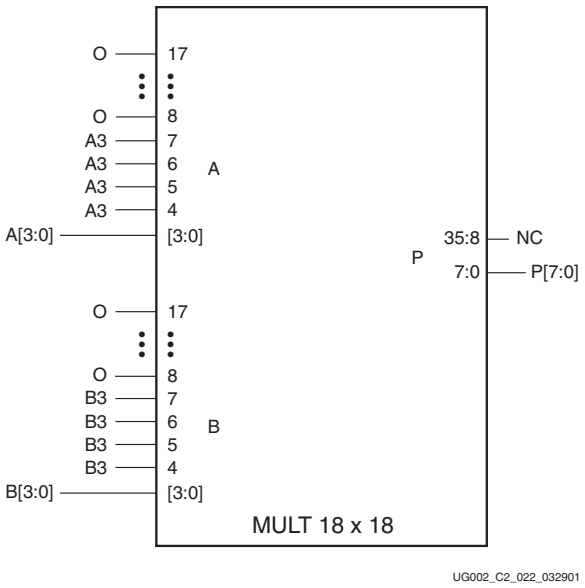


Figure 3-74: **MULT4X4_S Submodule**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 179 of 947

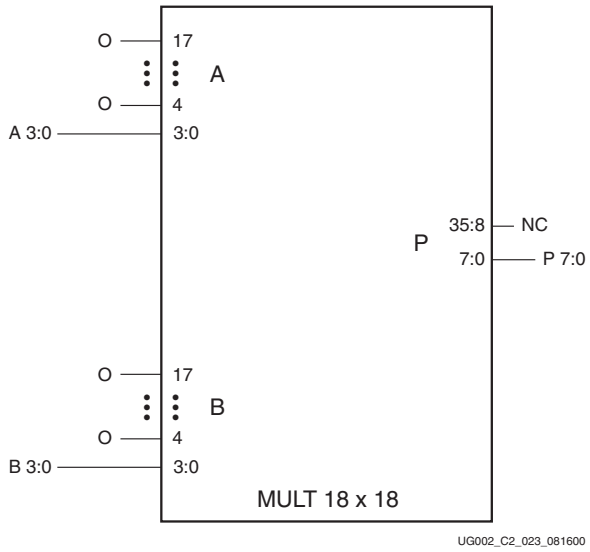


Figure 3-75: **MULT4X4_U Submodule**

Submodule MAGNTD_18 performs a magnitude return (i.e., absolute value) of a two's-complement number. An incoming negative number returns with a positive number, while an incoming positive number remains unchanged. Submodules TWOS_CMP18 and TWOS_CMP9 perform a two's-complement return function. The incoming number in two's-complement form (either signed or unsigned) is complemented when the DO_COMP pin is asserted High. Additional slice logic can be used with these submodules to efficiently convert sign-magnitude to two's-complement or vice-versa. Figure 3-76 shows the connections to a MULT18X18 to create the submodule TWOS_CMP9.

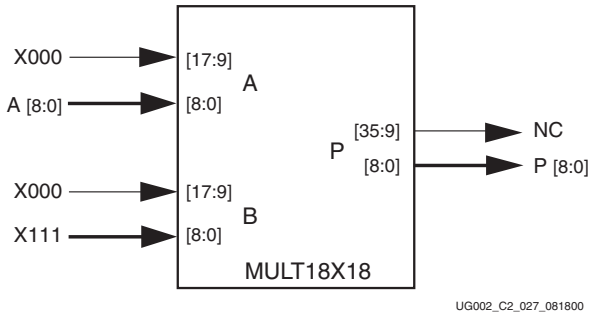


Figure 3-76: **TWOS_CMP9 Submodule**

Two Multipliers in a Single Primitive

Two multipliers can be implemented in a single primitive. For simplified illustration purposes, an assumption of two squares being implemented in the same MULT18X18 primitive is used. The following equation shows the form of the multiplication.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 180 of 947

Two Multipliers per Primitive:

$$(X * 2^n + Y)(X * 2^n + Y) = (X^2 * 2^{2n}) + (Y^2) + (XY * 2^{n+1})$$

$(X * 2^n)$ is the input X appearing on the MSBs while Y appears on the LSBs to form the value $(X * 2^n + Y)$. Two multipliers can coexist in one MULT18X18 primitive, if the conditions in the following inequalities are met when neither X nor Y are 0.

Inequality Conditions for Two Multipliers per Primitive:

$$(X2 * 2^{2n})_{min} > (XY * 2^{n+1})_{max}, (XY * 2^{n+1})_{min} > (Y^2)_{max}$$

For values 0 on X or Y, the equation becomes:

$X^2 * 2^{2n}$ {Y=0}

Y^2 {X=0}

0 {X=0, Y=0}

Figure 3-77 represents the MULT_6X6S_5X5U submodule.

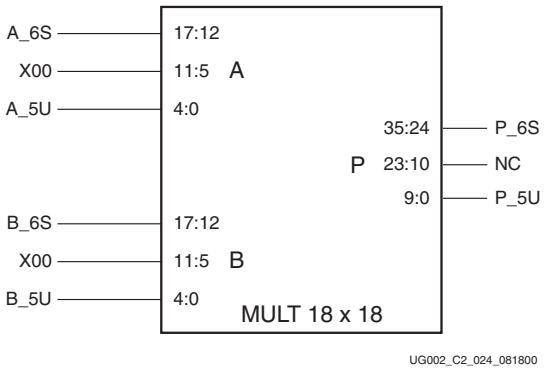


Figure 3-77: **MULT_6X6S_5X5U -- Connections to a MULT18X18 Primitive**

Table 3-29 shows values for X and Y where these conditions are met.

Table 3-29: **Two Multipliers per MULT18X18 Allowable Sizes**

X * X		Y * Y	
Signed Size	**Unsigned Size**	**Signed Size**	**Unsigned Size**
7 X 7	6 X 6	-	4 X 4
6 X 6	5 X 5	-	5 X 5
5 X 5	4 X 4	3 X 3	6 X 6
4 X 4	3 X 3	3 X 3	7 X 7
3 X 3	2 X 2	4 X 4	8 X 8

VHDL and Verilog Instantiation

VHDL and Verilog instantiation templates are available in the Libraries Guide for all primitives and submodules.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 181 of 947

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signals names.

Port Signals

Data In - A

The data input provides new data (up to 18 bits) to be used as one of the multiplication operands.

Data In - B

The data input provides new data (up to 18 bits) to be used as one of the multiplication operands.

Data Out - P

The data output bus P provides the data value (up to 36 bits) of two's-complement multiplication for operands A and B.

Location Constraints

Each embedded multiplier has location coordinates of the form XrowYcolumn. To constrain placement, multiplier instances can have LOC properties attached to

MULT18X18 embedded multiplier instances can have LOC properties attached to them to constrain placement. MULT18X18 placement locations differ from the convention used for naming CLB locations, allowing LOC properties to transfer easily from array to array.

The LOC properties use the following form:

LOC = MULT18X18_X#Y#

For example, MULT18X18_X0Y0 is the bottom-left MULT18X18 location on the device.

VHDL and Verilog Templates

VHDL and Verilog templates are available for the primitive and submodules.

The following is a template for the primitive:

- SIGNED_MULT_18X18 (primitive: MULT18X18)

The following are templates for submodules:

- SIGNED_MULT_35X35 (submodule: MULT35X35_S)
- UNSIGNED_MULT_34X34 (submodule: MULT34X34_U)
- UNSIGNED_MULT_17X17 (submodule: MULT17X17_U)
- SIGNED_MULT_8X8 (submodule: MULT8X8_S)
- UNSIGNED_MULT_8X8 (submodule: MULT8X8_U)
- SIGNED_MULT_4X4 (submodule: MULT4X4_S)
- UNSIGNED_MULT_4X4 (submodule: MULT4X4_U)
- DUAL_MULT_6X6S_5X5U (submodule: MULT_6X6S_5X5U)
- DUAL_MULT_5X5S_6X6U (submodule: MULT_5X5S_6X6U)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 182 of 947

- DUAL_MULT_5X5U_5X5U (submodule: MULT_5X5U_5X5U)
- DUAL_MULT_4X4S_7X7U (submodule: MULT_4X4S_7X7U)
- DUAL_MULT_4X4S_3X3S (submodule: MULT_4X4S_3X3S)
- TWOS_COMPLEMENTER_18BIT (submodule: TWOS_CMP18)
- TWOS_COMPLEMENTER_9BIT (submodule: TWOS_CMP9)
- MAGNITUDE_18BIT (submodule: MAGNTD_18)

The corresponding submodules have to be synthesized with the design.

Templates for the SIGNED_MULT_18X18 module are provided in VHDL and Verilog code as an example.

VHDL Template:

```
-- Module: SIGNED_MULT_18X18
-- Description: VHDL instantiation template
-- 18-bit X 18-bit embedded signed multiplier (asynchronous)
--
-- Device: Virtex-II Pro Family
------------------------------------------------------------------------
-- Components Declarations
component MULT18X18
  port(
       A :  in std_logic_vector (17 downto 0);
       B :  in std_logic_vector (17 downto 0);
       P : out std_logic_vector (35 downto 0)
  );
end component;
--
-- Architecture Section
--
U_MULT18X18 : MULT18X18
  port map (
    A => , -- insert input signal #1
    B => , -- insert input signal #2
    P =>   -- insert output signal
  );
```

Verilog Template:

```
// Module: SIGNED_MULT_18X18
// Description: Verilog instantiation template
// 18-bit X 18-bit embedded signed multiplier (asynchronous)
//
// Device: Virtex-II Pro Family
//------------------------------------------------------------------------
// Instantiation Section
//
MULT18X18 U_MULT18X18
  (
    .A () , // insert input signal #1
    .B () , // insert input signal #2
    .P ()   // insert output signal
  );
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 183 of 947

Single-Ended SelectIO™-Ultra Resources

Summary

The Virtex-II Pro FPGA Series includes a highly configurable, high-performance single-ended SelectIO-Ultra resource that supports a wide variety of I/O standards. The SelectIO-Ultra resource includes a robust set of features, including programmable control of output drive strength, slew rate, and input delay and hold time. Taking advantage of the flexibility of SelectIO-Ultra features and the design considerations described in this document can improve and simplify system-level design.

Introduction

As FPGAs continue to grow in size and capacity, the larger and more complex systems designed for them demand an increased variety of I/O standards. Furthermore, as system clock speeds continue to increase, the need for high-performance I/O becomes more important. Chip-to-chip delays have an increasingly substantial impact on overall system speed. The task of achieving the desired system performance is becoming more difficult with the proliferation of low-voltage I/O standards. SelectIO-Ultra resolves this potential problem by providing a highly configurable, high-performance alternative to I/O resources used in more conventional programmable devices.

Virtex-II Pro SelectIO-Ultra blocks can support up to 19 single-ended I/O standards. Supporting such a variety of I/O standards allows support for a wide variety of applications.

Each Input/Output Block (IOB) includes six registers, two each from the input, output, and 3-state signals within the IOB. These registers are optionally configured as either a D-type flip-flop or as a level-sensitive latch. The purpose of having six registers is to allow designers to design double-data-rate (DDR) logic in the I/O blocks. Each pair of the flip-flop (FF) has different clocks so that the flip-flops can be driven by two clocks with a 180-degree phase shift to achieve DDR. All I/O flip-flops still share the same reset/preset line.

The input buffer has an optional delay element used to guarantee a zero hold time requirement for input signals registered within the IOB.

Virtex-II Pro SelectIO-Ultra features also provide dedicated resources for input reference voltage (VREF) and input output source voltage (V_{CCO}), along with a convenient banking system that simplifies board design. Virtex-II Pro CMOS inputs and outputs are powered from V_{CCO}. Differential amplifier inputs, such as GTL and SSTL, are powered from V_{CCAUX}.

Fundamentals

Modern bus applications, pioneered by the largest and most influential components in the digital electronics industry, are commonly introduced with a new I/O standard tailored specifically to the needs of that application. The bus I/O standards provide specifications to other vendors who create products designed to interface with these applications. Each standard often has its own specifications for current, voltage, I/O buffering, and termination techniques.

The ability to provide the flexibility and time-to-market advantages of programmable logic is increasingly dependent on the capability of the programmable logic device to support an ever increasing variety of I/O standards.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 184 of 947

SelectIO-Ultra resources feature highly configurable input and output buffers that provide support for a wide variety of I/O standards. An input buffer can be configured as either a simple buffer or as a differential amplifier input. An output buffer can be configured as either a push-pull output or as an open drain output. Table 3-30 illustrates all of the supported single-ended I/O standards in Virtex-II Pro devices. Each buffer type can support a variety of current and voltage requirements.

Table 3-30: **Supported Single-Ended I/O Standards**

I/O Standard	Output Source Voltage (VCCO)	Input Source Voltage (VCCO)	Input Reference Voltage (VREF)	Board Termination Voltage (VTT)
LVTTL	3.3	3.3	N/A	N/A
LVCMOS33	3.3	3.3	N/A	N/A
LVCMOS25	2.5	2.5	N/A	N/A
LVCMOS18	1.8	1.8	N/A	N/A
LVCMOS15	1.5	1.5	N/A	N/A
PCI33_3	Note (1)	Note (1)	N/A	N/A
PCI66_3	Note (1)	Note (1)	N/A	N/A
PCI-X	Note (1)	Note (1)	N/A	N/A
GTL	Note (2)	Note (2)	0.8	1.2
GTLP	Note (2)	Note (2)	1.0	1.5
HSTL_I	1.5	N/A	0.75	0.75
HSTL_II	1.5	N/A	0.75	0.75
HSTL_III	1.5	N/A	0.9	1.5
HSTL_IV	1.5	N/A	0.9	1.5
HSTL_I_18	1.8	N/A	0.9	0.9
HSTL_II_18	1.8	N/A	0.9	0.9
HSTL_III _18	1.8	N/A	1.08	1.8
HSTL_IV_18	1.8	N/A	1.08	1.8
SSTL2_I	2.5	N/A	1.25	1.25
SSTL2_II	2.5	N/A	1.25	1.25
SSTL18_I (3)	1.8	N/A	0.9	0.9
SSTL18_II	1.8	N/A	0.9	0.9

Notes:

1. For PCI and PCI-X standards, refer to XAPP653.
2. VCCO of GTL or GTLP should not be lower than the termination voltage or the voltage seen at the I/O pad.
3. SSTL18_I is not a JEDEC-supported standard.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 185 of 947

Overview of Supported I/O Standards

This section provides a brief overview of I/O standards supported by all Virtex-II Pro devices.

While most I/O standards specify a range of allowed voltages, this document records typical voltage values only. Detailed information on each specification can be found on the Electronic Industry Alliance JEDEC website at http://www.jedec.org.

LVTTL - Low-Voltage TTL

The low-voltage TTL, or LVTTL, standard is a general purpose EIA/JESDSA standard for 3.3V applications that use an LVTTL input buffer and a push-pull output buffer. This standard requires a 3.3V input and output source voltage (V_{CCO}), but does not require the use of a reference voltage (V_{REF}) or a termination voltage (V_{TT}).

LVCMOS33 - 3.3-Volt Low-Voltage CMOS

This standard is an extension of the LVCMOS standard (JESD 8.-5). It is used in general purpose 3.3V applications.The standard requires a 3.3V input/output source voltage (V_{CCO}), but does not require the use of a reference voltage (V_{REF}) or a termination voltage (V_{TT}).

LVCMOS25 - 2.5-Volt Low-Voltage CMOS

This standard is an extension of the LVCMOS standard (JESD 8.-5). It is used in general purpose 2.5 volts or lower applications. This standard requires a 2.5V input /output source voltage (V_{CCO}), but does not require the use of a reference voltage (V_{REF}) or a board termination voltage (V_{TT}).

LVCMOS18 - 1.8-Volt Low-Voltage CMOS

This standard is an extension of the LVCMOS standard. It is used in general purpose 1.8V applications. The use of a reference voltage (V_{REF}) or board termination voltage (V_{TT}) is not required.

LVCMOS15 - 1.5-Volt Low-Voltage CMOS

This standard is an extension of the LVCMOS standard. It is used in general purpose 1.5V applications. The use of a reference voltage (V_{REF}) or a board termination voltage (V_{TT}) is not required.

PCI - Peripheral Component Interface

The PCI standard specifies support for 33 MHz, 66 MHz, and 133 MHz PCI bus applications. It uses an LVTTL input buffer and a push-pull output buffer. This standard does not require the use of a reference voltage (V_{REF}) or a board termination voltage (V_{TT}). However, it does require 3.3V input/output source voltage (V_{CCO}).

For further information on interfacing a Virtex-II Pro device to a PCI bus, see the following Xilinx application notes. The information contained in both these application notes must be taken into account when implementing PCI33_3 , PCI66_3, and PCI-X.

- XAPP653, *Virtex-II Pro 3.3V PCI Reference Design*
- XAPP646, *Connecting Virtex-II Devices to a 3.3V/5V PCI Bus*

Note: XAPP653 is recommended for PCI applications, as it is PCI-compliant and more cost-effective than XAPP646.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 186 of 947

GTL - Gunning Transceiver Logic Terminated

The GTL standard is a high-speed bus standard (JESD8.3) invented by Xerox. Xilinx has implemented the terminated variation for this standard. This standard requires a differential amplifier input buffer and a open Drain output buffer.

GTLP - Gunning Transceiver Logic Plus

The Gunning Transceiver Logic Plus, or GTLP standard is a high-speed bus standard (JESD8.3) first used by the Pentium Pro Processor.

HSTL - High-Speed Transceiver Logic

The high-speed Transceiver Logic, or HSTL standard is a general purpose high-speed, 1.5V bus standard sponsored by IBM (EIA/JESD8-6). This standard has four variations or classes. Virtex-II Pro SelectIO-Ultra supports all four classes. This standard requires a differential amplifier input buffer and a push-pull output buffer.

SSTL2 - Stub Series Terminated Logic for 2.5V

The Stub Series Terminated Logic for 2.5V, or SSTL2 standard is a general purpose 2.5V memory bus standard also sponsored by Hitachi and IBM (JESD8-8). This standard has two classes, I and II. Virtex-II Pro SelectIO-Ultra supports both classes for the SSTL2 standard. This standard requires a differential amplifier input buffer and a push-pull output buffer.

SSTL18 - Stub Series Terminated Logic for 1.8V

The Stub Series Terminated Logic for 1.8V, or SSTL18 is a general purpose 1.8V memory bus standard. Similar to SSTL2, it has two classes, I and II. (Only Class II is supported by JESD8-15.) Virtex-II Pro SelectIO-Ultra supports both classes for the SSTL18 standard. This standard requires a differential amplifier input buffer and a push-pull output buffer.

Library Symbols

The Xilinx library includes an extensive list of symbols designed to provide support for the variety of SelectIO-Ultra features. Most of these symbols represent variations of the five generic SelectIO-Ultra symbols.

- IBUF (input buffer)
- IBUFG (clock input buffer)
- OBUF (output buffer)
- OBUFT (3-state output buffer)
- IOBUF (input/output buffer)

IBUF

Signals used as inputs to a Virtex-II Pro device must source an input buffer (IBUF) via an external input port. The generic Virtex-II Pro IBUF symbol is shown in Figure 3-78. The extension to the base name defines which I/O standard the IBUF uses. The assumed standard is LVCMOS when the generic IBUF has no specified extension.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 187/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 187 of 947




Figure 3-78: **Input Buffer (IBUF) Symbols**

Table 3-31 details variations of the IBUF symbol for single-ended Virtex-II Pro I/O standards:

Table 3-31: **Variations of the IBUF Symbol**

IBUF	IBUF_GTL	IBUF_SSTL2_I
IBUF_LVCMOS15	IBUF_GTLP	IBUF_SSTL2_II
IBUF_LVCMOS18	IBUF_HSTL_I	IBUF_PCI33_3
IBUF_LVCMOS25	IBUF_HSTL_II	IBUF_PCI66_3
IBUF_LVCMOS33	IBUF_HSTL_III	IBUF_PCIX
	IBUF_HSTL_IV	

When the IBUF symbol supports an I/O standard that requires a differential amplifier input, the IBUF is automatically configured as a differential amplifier input buffer. The low-voltage I/O standards with a differential amplifier input require an external reference voltage input V_{REF}.

The voltage reference signal is "banked" within the Virtex-II Pro device on a half-edge basis, such that, for all packages, there are eight independent V_{REF} banks internally. For a representation of the Virtex-II Pro I/O banks, see Figure 3-80.

Within each bank approximately one of every six I/O pins is automatically configured as a V_{REF} input. After placing a differential amplifier input signal within a given V_{REF} bank, the same external source must drive all I/O pins configured as a V_{REF} input.

IBUF placement restrictions require that any differential amplifier input signals within a bank be of the same standard. How to specify a specific location for the IBUF via the LOC property is described below. Table 3-32 summarizes compatibility requirements of Virtex-II Pro input standards.

An optional delay element in the input data path is associated with each IBUF. When the IBUF drives a flip-flop within the IOB, the delay element is activated by default to ensure a zero hold-time requirement at the device input pin. The IOBDELAY = NONE property overrides this default, reducing the input set-up time, but risking a hold-time requirement.

When the IBUF does not drive a flip-flop within the IOB, the delay element is deactivated by default to provide a shorter input set-up time. To delay the input signal, activate the delay element with the IOBDELAY = BOTH property.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 188 of 947

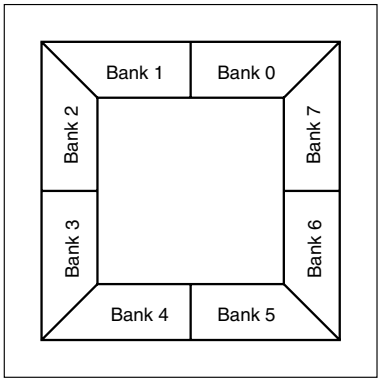


Figure 3-79: **Virtex-II Pro I/O Banks: Top View for Flip-Chip Packages (FF)**

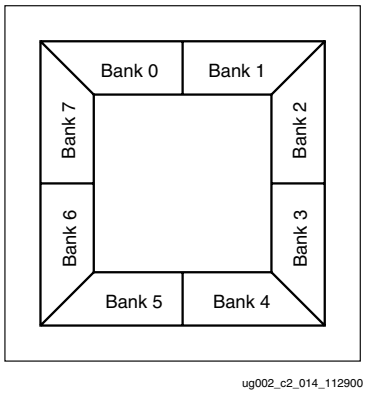


Figure 3-80: **Virtex-II Pro I/O Banks: Top View for Wire-Bond Package (FG)**

Table 3-32: **Xilinx Input Standard Compatibility Requirements**

Rule 1	Standards with the same V_{CCO}, and V_{REF} can be placed within the same bank.
Rule 2	Standards that don't require a V_{REF} can be placed within the same bank with the standards that have the same V_{CCO} values

Each bank has its own V_{CCO} and V_{REF} voltage. Details on compatible input standards for each V_{CCO} / V_{REF} voltage combination are available in the Virtex-II Pro Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 189/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 189 of 947

OBUF

An OBUF must drive outputs through an external output port. Figure 3-81 shows the generic output buffer (OBUF) symbol.




Figure 3-81: **Virtex-II Pro Output Buffer (OBUF) Symbol**

The extension to the base name defines which I/O standard the OBUF uses. With no extension specified for the generic OBUF symbol, the assumed standard is slew rate limited LVCMOS25 with 12mA drive strength.

The LVCMOS OBUFs can additionally support one of two slew rate modes to minimize bus transients. By default, the slew rate for each output buffer is reduced to minimize power bus transients, when switching non-critical signals.

LVCMOS output buffers have selectable drive strengths. The format for these OBUF symbol names is as follows:

`OBUF_<slew_rate>_<drive_strength>`

<slew_rate> is either F (fast) or S (slow) and <*drive_strength*> is specified in milliamperes. For LVCMOS25, the supported drive strengths are 2, 4, 6, 8, 12, 16, and 24. For LVCMOS15 and LVCMOS18, the supported drive strengths are 2, 4, 6, 8, 12, and 16.

Table 3-33 details variations of the OBUF symbol.

Table 3-33: **Variations of the OBUF Symbol**

OBUF	OBUF_LVCMOS18	OBUF_LVCMOS25_F_24
OBUF_S_2	OBUF_LVCMOS18_S_2	OBUF_LVCMOS33_S_4
OBUF_S_4	OBUF_LVCMOS18_S_4	OBUF_LVCMOS33_S_6
OBUF_S_6	OBUF_LVCMOS18_S_6	OBUF_LVCMOS33_S_8
OBUF_S_8	OBUF_LVCMOS18_S_8	OBUF_LVCMOS33_S_12
OBUF_S_12	OBUF_LVCMOS18_S_12	OBUF_LVCMOS33_S_16
OBUF_S_16	OBUF_LVCMOS18_S_16	OBUF_LVCMOS33_S_24
OBUF_S_24	OBUF_LVCMOS18_F_2	OBUF_LVCMOS33_F_2
OBUF_F_2	OBUF_LVCMOS18_F_4	OBUF_LVCMOS33_F_4
OBUF_F_4	OBUF_LVCMOS18_F_6	OBUF_LVCMOS33_F_6
OBUF_F_6	OBUF_LVCMOS18_F_8	OBUF_LVCMOS33_F_8
OBUF_F_8	OBUF_LVCMOS18_F_12	OBUF_LVCMOS33_F_12
OBUF_F_12	OBUF_LVCMOS18_F_16	OBUF_LVCMOS33_F_16
OBUF_F_16	OBUF_LVCMOS25	OBUF_LVCMOS33_F_24
OBUF_F_24	OBUF_LVCMOS25_S_2	OBUF_PCI33_3

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 190 of 947

Table 3-33: **Variations of the OBUF Symbol *(Continued)***

OBUF_LVCMOS15	OBUF_LVCMOS25_S_4	OBUF_PCI66-3
OBUF_LVCMOS15_S_2	OBUF_LVCMOS25_S_6	OBUF_PCIX
OBUF_LVCMOS15_S_4	OBUF_LVCMOS25_S_8	OBUF_GTL
OBUF_LVCMOS15_S_6	OBUF_LVCMOS25_S_12	OBUF_GTLP
OBUF_LVCMOS15_S_8	OBUF_LVCMOS25_S_16	OBUF_HSTL_I
OBUF_LVCMOS15_S_12	OBUF_LVCMOS25_S_24	OBUF_HSTL_II
OBUF_LVCMOS15_S_16	OBUF_LVCMOS25_F_2	OBUF_HSTL_III
OBUF_LVCMOS15_F_2	OBUF_LVCMOS25_F_4	OBUF_HSTL_IV
OBUF_LVCMOS15_F_4	OBUF_LVCMOS25_F_6	OBUF_SSTL18_I
OBUF_LVCMOS15_F_6	OBUF_LVCMOS25_F_8	OBUF_SSTL18_II
OBUF_LVCMOS15_F_8	OBUF_LVCMOS25_F_12	OBUF_SSTL2_I
OBUF_LVCMOS15_F_12	OBUF_LVCMOS25_F_16	OBUF_SSTL2_II
OBUF_LVCMOS15_F_16		

OBUF placement restrictions require that within a given V_{CCO} bank each OBUF share the same output source drive voltage. Input buffers with the same V_{CCO} and output buffers that do not require V_{CCO} can be placed within any V_{CCO} bank. Table 3-34 summarizes Virtex-II Pro output compatibility requirements. The LOC property can specify a location for the OBUF.

Table 3-34: **Output Standards Compatibility Requirements**

Rule 1	Only outputs with standards which share compatible V_{CCO} can be used within the same bank.
Rule 2	There are no placement restrictions for outputs with standards that do not require a V_{CCO}

Each bank has its own V_{CCO} voltage. Details on compatible output standards for each V_{CCO} voltage combination are available in the Virtex-II Pro Data Sheet.

OBUFT

The generic 3-state output buffer OBUFT, shown in Figure 3-82, typically implements 3-state outputs or bidirectional I/O.




Figure 3-82: **3-State Output Buffer Symbol (OBUFT)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 191/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 191 of 947

The extension to the base name defines which I/O standard OBUFT uses. With no extension specified for the generic OBUFT symbol, the assumed standard is slew rate limited LVCMOS with 12mA drive strength.

The LVCMOS OBUFT additionally can support one of two slew rate modes to minimize bus transients. By default, the slew rate for each output buffer is reduced to minimize power bus transients, when switching non-critical signals.

LVCMOS 3-state buffers have selectable drive strengths. The format for these OBUFT symbol names is as follows:

`OBUFT_<slew_rate>_<drive_strength>`

<slew_rate> is either F (fast) or S (slow) and <*drive_strength*> is specified in milliamperes. For LVCMOS25, the supported drive strengths are 2, 4, 6, 8, 12, 16, and 24. For LVCMOS15 and LVCMOS18, the supported drive strengths are 2, 4, 6, 8, 12, and 16.

Table 3-35 details variations of the OBUFT symbol.

Table 3-35: **Variations of the OBUFT Symbol**

OBUFT	OBUFT_LVCMOS18	OBUFT_LVCMOS25_F_24
OBUFT_S_2	OBUFT_LVCMOS18_S_2	OBUFT_LVCMOS33
OBUFT_S_4	OBUFT_LVCMOS18_S_4	OBUFT_LVCMOS33_S_2
OBUFT_S_6	OBUFT_LVCMOS18_S_6	OBUFT_LVCMOS33_S_4
OBUFT_S_8	OBUFT_LVCMOS18_S_8	OBUFT_LVCMOS33_S_6
OBUFT_S_12	OBUFT_LVCMOS18_S_12	OBUFT_LVCMOS33_S_8
OBUFT_S_16	OBUFT_LVCMOS18_S_16	OBUFT_LVCMOS33_S_12
OBUFT_S_24	OBUFT_LVCMOS18_F_2	OBUFT_LVCMOS33_S_16
OBUFT_F_2	OBUFT_LVCMOS18_F_4	OBUFT_LVCMOS33_S_24
OBUFT_F_4	OBUFT_LVCMOS18_F_6	OBUFT_LVCMOS33_F_2
OBUFT_F_6	OBUFT_LVCMOS18_F_8	OBUFT_LVCMOS33_F_4
OBUFT_F_8	OBUFT_LVCMOS18F_12	OBUFT_LVCMOS33_F_6
OBUFT_F_12	OBUFT_LVCMOS18_F_16	OBUFT_LVCMOS33_F_8
OBUFT_F_16	OBUFT_LVCMOS25	OBUFT_LVCMOS33_F_12
OBUFT_F_24	OBUFT_LVCMOS25_S_2	OBUFT_LVCMOS33_F_16
OBUFT_LVCMOS15	OBUFT_LVCMOS25_S_4	OBUFT_LVCMOS33_F_24
OBUFT_LVCMOS15_S_2	OBUFT_LVCMOS25_S_6	OBUFT_PCI33_3
OBUFT_LVCMOS15_S_4	OBUFT_LVCMOS25_S_8	OBUFT_PCI66-3
OBUFT_LVCMOS15_S_6	OBUFT_LVCMOS25_S_12	OBUFT_PCIX
OBUFT_LVCMOS15_S_8	OBUFT_LVCMOS25_S_16	OBUFT_GTL
OBUFT_LVCMOS15_S_12	OBUFT_LVCMOS25_S_24	OBUFT_GTLP
OBUFT_LVCMOS15_S_16	OBUFT_LVCMOS25_F_2	OBUFT_HSTL_I
OBUFT_LVCMOS15_F_2	OBUFT_LVCMOS25_F_4	OBUFT_HSTL_II

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 192 of 947

Table 3-35: **Variations of the OBUFT Symbol *(Continued)***

OBUFT_LVCMOS15_F_4	OBUFT_LVCMOS25_F_6	OBUFT_HSTL_III
OBUFT_LVCMOS15_F_6	OBUFT_LVCMOS25_F_8	OBUFT_HSTL_IV
OBUFT_LVCMOS15_F_8	OBUFT_LVCMOS25_F_12	OBUFT_SSTL2_I
OBUFT_LVCMOS15_F_12	OBUFT_LVCMOS25_F_16	OBUFT_SSTL2_II
OBUFT_LVCMOS15_F_16		

OBUFT placement restrictions require that within a given V_{CCO} bank each OBUFT share the same output source drive voltage. Input buffers with the same V_{CCO} and output buffers that do not require V_{CCO} can be placed within any V_{CCO} bank. The LOC property can specify a location for the OBUFT.

3-state output buffers and bidirectional buffers can have either a weak pull-up resistor, a weak pull-down resistor, or a weak "keeper" circuit. Control this feature by adding the appropriate symbol to the output net of the OBUFT (PULLUP, PULLDOWN, or KEEPER).

The weak "keeper" circuit requires the input buffer within the IOB to sample the I/O signal. Thus, OBUFTs programmed for an I/O standard that requires a V_{REF} have automatic placement of a V_{REF} in the bank with an OBUFT configured with a weak "keeper" typically implement a bidirectional I/O. In this case, the IBUF (and the corresponding V_{REF}) are placed explicitly.

IOBUF

Use the IOBUF symbol for bidirectional signals that require both an input buffer and a 3-state output buffer with an active High 3-state pin. Figure 3-83 shows the generic input/output IOBUF buffer.




Figure 3-83: **Input/Output Buffer Symbol (IOBUF)**

The extension to the base name defines which I/O standard the IOBUF uses. With no extension specified for the generic IOBUF symbol, the assumed standard is LVCMOS input buffer and slew rate limited LVCMOS with 12mA drive strength for the output buffer.

The LVCMOS IOBUF can additionally support one of two slew rate modes to minimize bus transients. By default, the slew rate for each output buffer is reduced to minimize power bus transients, when switching non-critical signals.

LVCMOS output buffers have selectable drive strengths. The format for these IOBUF symbol names is as follows:

```
IOBUF_<slew_rate>_<drive_strength>
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 193/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 193 of 947

<slew_rate> is either F (fast) or S (slow) and <*drive_strength*> is specified in milliamperes. For LVCMOS25, the supported drive strengths are 2, 4, 6, 8, 12, 16, and 24. For LVCMOS15 and LVCMOS18, the supported drive strengths are 2, 4, 6, 8, 12, and 16. Table 3-36 details variations of the IOBUF symbol.

Table 3-36: **Variations of the IOBUF Symbol**

IOBUF	IOBUF_LVCMOS18	IOBUF_LVCMOS33
IOBUF_S_2	IOBUF_LVCMOS18_S_2	IOBUF_LVCMOS33_S_2
IOBUF_S_4	IOBUF_LVCMOS18_S_4	IOBUF_LVCMOS33_S_4
IOBUF_S_6	IOBUF_LVCMOS18_S_6	IOBUF_LVCMOS33_S_6
IOBUF_S_8	IOBUF_LVCMOS18_S_8	IOBUF_LVCMOS33_S_8
IOBUF_S_12	IOBUF_LVCMOS18_S_12	IOBUF_LVCMOS33_S_12
IOBUF_S_16	IOBUF_LVCMOS18_S_16	IOBUF_LVCMOS33_S_16
IOBUF_S_24	IOBUF_LVCMOS18_F_2	IOBUF_LVCMOS33_S_24
IOBUF_F_2	IOBUF_LVCMOS18_F_4	IOBUF_LVCMOS33_F_2
IOBUF_F_4	IOBUF_LVCMOS18_F_6	IOBUF_LVCMOS33_F_4
IOBUF_F_6	IOBUF_LVCMOS18_F_8	IOBUF_LVCMOS33_F_6
IOBUF_F_8	IOBUF_LVCMOS18F_12	IOBUF_LVCMOS33_F_8
IOBUF_F_12	IOBUF_LVCMOS18_F_16	IOBUF_LVCMOS33_F_12
IOBUF_F_16	IOBUF_LVCMOS25	IOBUF_LVCMOS33_F_16
IOBUF_F_24	IOBUF_LVCMOS25_S_2	IOBUF_LVCMOS33_F_24
IOBUF_LVCMOS15	IOBUF_LVCMOS25_S_4	IOBUF_PCI33_3
IOBUF_LVCMOS15_S_2	IOBUF_LVCMOS25_S_6	IOBUF_PCI66-3
IOBUF_LVCMOS15_S_4	IOBUF_LVCMOS25_S_8	IOBUF_PCIX
IOBUF_LVCMOS15_S_6	IOBUF_LVCMOS25_S_12	IOBUF_GTL
IOBUF_LVCMOS15_S_8	IOBUF_LVCMOS25_S_16	IOBUF_GTLP
IOBUF_LVCMOS15_S_12	IOBUF_LVCMOS25_S_24	IOBUF_HSTL_I
IOBUF_LVCMOS15_S_16	IOBUF_LVCMOS25_F_2	IOBUF_HSTL_II
IOBUF_LVCMOS15_F_2	IOBUF_LVCMOS25_F_4	IOBUF_HSTL_III
IOBUF_LVCMOS15_F_4	IOBUF_LVCMOS25_F_6	IOBUF_HSTL_IV
IOBUF_LVCMOS15_F_6	IOBUF_LVCMOS25_F_8	IOBUF_SSTL18_I
IOBUF_LVCMOS15_F_8	IOBUF_LVCMOS25_F_12	IOBUF_SSTL18_II
IOBUF_LVCMOS15_F_12	IOBUF_LVCMOS25_F_16	IOBUF_SSTL2_I
IOBUF_LVCMOS15_F_16	IOBUF_LVCMOS25_F_24	IOBUF_SSTL2_II

When the IOBUF symbol supports an I/O standard that requires a differential amplifier input, IOBUF is automatically configured as a differential amplifier input buffer.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 194 of 947

Low-voltage I/O standards with a differential amplifier input require an external reference voltage input V_{REF}.

The voltage reference signal is "banked" within the Virtex-II Pro device on a half-edge basis, such that for all packages there are eight independent V_{REF} banks internally. For a representation of the Virtex-II Pro I/O banks, see Figure 3-80. Within each bank approximately one of every twelve I/O pins is automatically configured as a V_{REF} input. After placing a differential amplifier input signal within a given V_{REF} bank, the same external source must drive all I/O pins configured as a V_{REF} input.

IOBUF placement restrictions require any differential amplifier input signals within a bank be of the same standard.

Additional restrictions on Virtex-II Pro SelectIO-Ultra IOBUF placement require that within a given V_{CCO} bank each IOBUF share the same output source drive voltage. Input buffers with the same V_{CCO} and output buffers that do not require V_{CCO} can be placed within any V_{CCO} bank. The LOC property can specify a location for the IOBUF.

An optional delay element is associated with the input path in each IOBUF. When the IOBUF drives an input flip-flop within the IOB, the delay element is activated by default to ensure the zero hold-time requirement. Override this default with the IOBDELAY = NONE property.

In the case when the IOBUF does not drive an input flip-flop within the IOB, the delay element is deactivated by default to provide higher performance. To delay the input signal, activate the delay element with the IOBDELAY = BOTH property.

3-state output buffers and bidirectional buffers can have a weak pull-up resistor, a weak pull-down resistor, or a weak "keeper" circuit. Control this feature by adding the appropriate symbol to the output net of the IOBUF (PULLUP, PULLDOWN, or KEEPER).

SelectIO-Ultra Properties

Access to some SelectIO-Ultra features (for example, location constraints, input delay, output drive strength, and slew rate) is available through properties associated with these features.

Input Delay Properties

An optional delay element is associated with the input path in each IBUF. When the IBUF drives an input flip-flop within the IOB, the delay element activates by default to ensure the zero hold-time requirement. Override this default with the IOBDELAY = NONE property.

In the case when the IBUF does not drive an input flip-flop within the IOB, the delay element is deactivated by default to provide higher performance. To delay the input signal, activate the delay element with the IOBDELAY = BOTH property.

IOB Flip-Flop/Latch Properties

The Virtex-II Pro Series I/O block (IOB) includes two optional registers on the input path, two optional registers on the output path, and two optional registers on the 3-state control pin. The design implementation software automatically takes advantage of these registers when the following option for the MAP program is specified.

```
Map -pr b <filename>
```

Alternatively, the IOB = TRUE property can be placed on a register to force the mapper to place the register in an IOB.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 195/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 195 of 947

The two registers for each path makes designing double-data-rate (DDR) logic much simpler. Each pair of the registers has separate clock inputs, which can be driven by either the positive edge or the negative edge of the clock. Users can use both edges of the clocks to clock data in and out from the IOB. For details on DDR, see "Double-Data-Rate (DDR) I/O," page 232.

Location Constraints

Specify the location of each SelectIO-Ultra symbol with the location constraint LOC attached to the SelectIO-Ultra symbol. The external port identifier indicates the value of the location constrain. The format of the port identifier depends on the package chosen for the specified design.

The LOC properties use the following form:

- LOC=A42;
- LOC=P37;

Output Slew Rate Property

As mentioned above, a variety of symbol names provide the option of choosing the desired slew rate for the output buffers. In the case of the LVCMOS output buffers (OBUF, OBUFT, and IOBUF), slew rate control can be alternatively programmed with the SLEW = property. By the default, the slew rate for each output buffer is reduced to minimize power bus transients when switching non-critical signals. The SLEW = property has one of the two following values:

- SLEW = SLOW
- SLEW = FAST

Output Drive Strength Property

The desired output drive strength can be additionally specified by choosing the appropriate library symbol. The Xilinx library also provides an alternative method for specifying this feature. For the LVCMOS output buffers (OBUF, OBUFT, and IOBUF), the desired drive strength can be specified with the DRIVE = property. This property could have one of the following values:

- DRIVE = 2
- DRIVE = 4
- DRIVE = 6
- DRIVE = 8
- DRIVE = 12
- DRIVE = 16
- DRIVE = 24

Design Considerations

Reference Voltage (V_{REF}) Pins

Low-voltage I/O standards with a differential amplifier input buffer require an input reference voltage (V_{REF}). Provide the V_{REF} as an external signal to the device.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 196 of 947

The voltage reference signal is "banked" within the Virtex-II Pro device on a half-edge basis such that for all packages there are eight independent V_{REF} banks internally. See Figure 3-80 for a representation of the Virtex-II Pro I/O banks. Within each bank approximately one of every twelve I/O pins is automatically configured as a V_{REF} input. After placing a differential amplifier input signal within a given V_{REF} bank, the same external source must drive all I/O pins configured as a V_{REF} input.

Within each V_{REF} bank, any input buffers that require a V_{REF} signal must be of the same type. Output buffers that have the same V_{CCO} values as the input buffers can be placed within the same V_{REF} bank.

Output Drive Source Voltage (V_{CCO}) Pins

Many of the low-voltage I/O standards supported by SelectIO-Ultra devices require a different output drive source voltage (V_{CCO}). As a result each device can often have to support multiple output drive source voltages.

Output buffers within a given V_{CCO} bank must share the same output drive source voltage. Input buffers for LVTTL, LVCMOS15, LVCMOS18, LVCMOS25, LVCMOS33, PCI33_3, PCI66_3, and PCI-X use the V_{CCO} voltage for input V_{CCO} voltage.

Transmission Line Effects

The delay of an electrical signal along a wire is dominated by the rise and fall times when the signal travels a short distance. Transmission line delays vary with inductance and capacitance. But a well-designed board can experience delays of approximately 180ps per inch. Transmission line effects, or reflections, typically start at 1.5" for fast (1.5ns) rise and fall times. Poor (or non-existent) termination or changes in the transmission line impedance cause these reflections and can cause additional delay in longer traces. As a system speeds continue to increase, the effect of I/O delays can become a limiting factor and therefore transmission line termination becomes increasingly more important.

Termination Techniques

A variety of termination techniques reduce the impact of transmission line effects.

The following are output termination techniques:

- None
- Series
- Parallel (Shunt)
- Series and Parallel (Series-Shunt)

The following are input termination techniques:

- None
- Parallel (Shunt)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 197 of 947

These termination techniques can be applied in any combination. A generic example of each combination of termination methods appears in Figure 3-84.

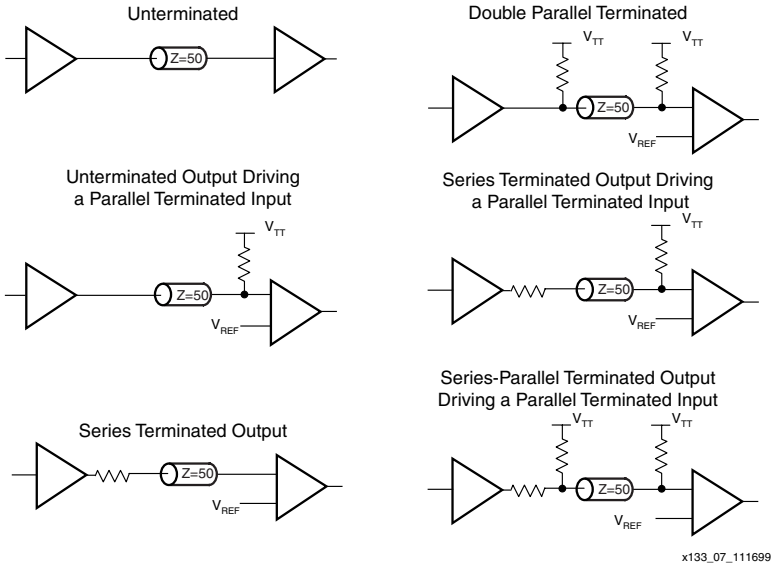


Figure 3-84: **Overview of Standard Input and Output Termination Methods**

Simultaneous Switching Guidelines

Ground bounce can occur with high-speed digital ICs when multiple outputs change states simultaneously, causing undesired transient behavior on an output or in the internal logic. This is also referred to as the Simultaneous Switching Output (SSO) problem.

Ground bounce is primarily due to current changes in the combined inductance of ground pins, bond wires, and group metallization. The IC internal ground level deviates from the external system ground level for a short duration (a few nanoseconds) after multiple outputs change state simultaneously.

Ground bounce affects stable low outputs and all inputs because they interpret the incoming signal by comparing it to the internal ground. If the ground bounce amplitude exceeds the actual instantaneous noise margin, then a non-changing input can be interpreted as changing. Table 3-37 provides the guidelines for the maximum number of simultaneously switching outputs allowed per output power/ground pair to avoid the effects of ground bounce. (See Note 1 at the end of the table for qualifications.) Refer to Table 3-38 and Table 3-39 for the number of effective output power/ground pairs for each Virtex-II Pro device and package combination.

Note on LVDCI Drivers

Table 3-37 shows LVDCI guidelines only for 50Ω impedance. For higher reference resistor (RR) values, less drive strength is needed, and the SSO limit increases linearly. To calculate the SSO limit for an LVDCI driver with different reference resistors, the following formula is used:

$$\text{New SSO Limit} = \frac{\text{New RR Value}}{50\Omega} \times \text{SSO Limit for } 50\Omega$$

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 198 of 947

Example:

If using the LVDCI_18 driver with 65Ω reference resistors, the LVDCI_18 SSO limit for 50Ω impedance is first taken from the table. The SSO limit for LVDCI_18 at 50Ω is 11 per power/ground pin pair. Therefore, the SSO limit for LVDCI_18 at 65Ω is (65Ω / 50Ω) × 11 = 14 per power/ground pin pair.

Table 3-37: **Guidelines for Maximum Number of Simultaneously Switching Outputs per Power/Ground Pair(1)**

Standard	Package: FG, FF
LVTTL2_slow	68
LVTTL4_slow	41
LVTTL6_slow	29
LVTTL8_slow	22
LVTTL12_slow	15
LVTTL16_slow	11
LVTTL24_slow	7
LVTTL2_fast	40
LVTTL4_fast	24
LVTTL6_fast	17
LVTTL8_fast	13
LVTTL12_fast	10
LVTTL16_fast	8
LVTTL24_fast	5
LVDCI_15 (50Ω impedance)	10
LVDCI_DV2_15 (25Ω impedance)	5
LVCMOS15_2_slow	51
LVCMOS15_4_slow	31
LVCMOS15_6_slow	22
LVCMOS15_8_slow	17
LVCMOS15_12_slow	11
LVCMOS15_16_slow	8
LVCMOS15_2_fast	30
LVCMOS15_4_fast	18
LVCMOS15_6_fast	13
LVCMOS15_8_fast	10
LVCMOS15_12_fast	8

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 199 of 947

Table 3-37: **Guidelines for Maximum Number of Simultaneously Switching Outputs per Power/Ground Pair(1) *(Continued)***

Standard	Package: FG, FF
LVCMOS15_16_fast	6
LVDCI_18 (50Ω impedance)	11
LVDCI_DV2_18 (25Ω impedance)	5
LVCMOS18_2_slow	58
LVCMOS18_4_slow	35
LVCMOS18_6_slow	25
LVCMOS18_8_slow	19
LVCMOS18_12_slow	13
LVCMOS18_16_slow	10
LVCMOS18_2_fast	34
LVCMOS18_4_fast	20
LVCMOS18_6_fast	15
LVCMOS18_8_fast	11
LVCMOS18_12_fast	9
LVCMOS18_16_fast	7
LVDCI_25 50Ω impedance	13
LVDCI_DV2_25 25Ω impedance	6
LVCMOS25_2_slow	68
LVCMOS25_4_slow	41
LVCMOS25_6_slow	29
LVCMOS25_8_slow	22
LVCMOS25_12_slow	15
LVCMOS25_16_slow	11
LVCMOS25_24_slow	7
LVCMOS25_2_fast	40
LVCMOS25_4_fast	24
LVCMOS25_6_fast	17
LVCMOS25_8_fast	13
LVCMOS25_12_fast	10
LVCMOS25_16_fast	8
LVCMOS25_24_fast	5

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 200 of 947

Table 3-37: **Guidelines for Maximum Number of Simultaneously Switching Outputs per Power/Ground Pair(1) *(Continued)***

Standard	Package: FG, FF
LVDCI_33 (50Ω impedance)	13
LVDCI_DV2_33 (25Ω impedance)	6
LVCMOS33_2_slow	68
LVCMOS33_4_slow	41
LVCMOS33_6_slow	29
LVCMOS33_8_slow	22
LVCMOS33_12_slow	15
LVCMOS33_16_slow	11
LVCMOS33_24_slow	7
LVCMOS33_2_fast	40
LVCMOS33_4_fast	24
LVCMOS33_6_fast	17
LVCMOS33_8_fast	13
LVCMOS33_12_fast	10
LVCMOS33_16_fast	8
LVCMOS33_24_fast	5
PCI33/66/X	8
GTL	4
GTL_DCI	3
GTLP	4
GTLP_DCI	3
HSTLI	20
HSTLI_DCI	20
HSTLII	10
HSTLII_DCI	7
HSTLIII	8
HSTLIII_DCI	8
HSTLIV	4
HSTLIV_DCI	4
SSTL18_I	20
SSTL18_I_DCI	20

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 201/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 201 of 947

Table 3-37: **Guidelines for Maximum Number of Simultaneously Switching Outputs per Power/Ground Pair(1) *(Continued)***

Standard	Package: FG, FF
SSTL18_II	10
SSTL18_II_DCI	6
SSTL2_I	15
SSTL2_I_DCI	15
SSTL2_II	10
SSTL2_II_DCI	5

Notes:

1. The maximum number of simultaneously switching outputs per power/ground pair may be less than the number given in this table if the external bypass capacitor solution has a high series inductance. This table presumes the use of ultra-low inductance bypass capacitors. Refer to "VCC Decoupling," page 439.

Since some of the ground pins are shared inside the package, the effective power/ground pairs per bank may be fewer than the physical power/ground pair pins. The following tables show the number of equivalent power/ground pairs.

Table 3-38 shows the number of pairs in banks 0, 1, 4, and 5 (top and bottom edges of the die), while Table 3-39 shows the numbers in banks 2, 3, 6, and 7. This is because MGTs reside on the top and bottom edge only.

Table 3-38: **Virtex-II Pro Equivalent Pwr/Gnd Pairs per Bank, Top/Bottom**

Package	For Banks 0, 1, 4, and 5 (Top/Bottom Sides):									
	2VP2	2VP4	2VP7	2VP20	2VP30	2VP40	2VP50	2VP70	2VP100	2VP125
FG256	2	2								
FG456	3	3	3							
FG676				5	5	5				
FF672	4	4	6							
FF896			6	9	9					
FF1152				9	9	11	11			
FF1148						11	11			
FF1517							13	15		
FF1704								15	16	16
FF1696									16	16

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 202 of 947

Table 3-39: **Virtex-II Pro Equivalent Pwr/Gnd Pairs per Bank, Left/Right**

Package	For Banks 2, 3, 6, and 7 (Left/Right Sides):									
	2VP2	2VP4	2VP7	2VP20	2VP30	2VP40	2VP50	2VP70	2VP100	2VP125
FG256	2	2								
FG456	2	4	4							
FG676				5	5	5				
FF672	3	6	6							
FF896			9	11	11					
FF1152				11	11	11	11			
FF1148						12	12			
FF1517							15	15		
FF1704								16	16	16
FF1696									16	16

Application Examples

Creating a design with the SelectIO-Ultra feature requires either assignment of the IOSTANDARD attribute in the constraint file or instantiation of the desired library symbol within the design code.

To enter the IOSTANDARD attribute in the constraint file (UCF file), the following syntax can be used:

```
NET <pad net name> IOSTANDARD=<the name of the standard>
```

For example, to enter LVCMOS25 standard, use

```
NET <pad net name> IOSTANDARD=LVCMOS25;
```

To instantiate a library symbol in the HDL code, use the proper input or output buffer name, and follow the standard syntax of instantiation.

For example, to instantiate a GTL input buffer in VHDL, the following syntax can be used:

```
GTL_buffer : IBUF_GTL port map (I=>data_in, O=>data_gtl_in);
```

At the board level, designers need to know the termination techniques required for each I/O standard.

This section describes some common application examples illustrating the termination techniques recommended by each of the single-ended standard supported by the SelectIO-Ultra features.

Termination Examples

Circuit examples involving typical termination techniques for each of the SelectIO-Ultra standards follow. For a full range of accepted values for the DC voltage specifications for each standard, refer to the table associated with each figure.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 203/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 203 of 947

The resistors used in each termination technique example and the transmission lines depicted represent board level components and are not meant to represent components on the device.

GTL

A sample circuit illustrating a valid termination technique for GTL is shown in Figure 3-85.

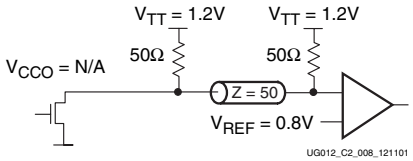


Figure 3-85: **GTL Terminated**

Table 3-40 lists DC voltage specifications.

Table 3-40: **GTL Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	-	N/A	-
$V_{REF} = N \times V_{TT}$ (1)	0.74	0.8	0.86
V_{TT}	1.14	1.2	1.26
$V_{IH} \geq V_{REF} + 0.05$	0.79	0.85	-
$V_{IL} \leq V_{REF} - 0.05$	-	0.75	0.81
V_{OH}	-	-	-
V_{OL}	-	0.2	0.4
I_{OH} at V_{OH} (mA)	-	-	-
I_{OL}at V_{OL} (mA) at 0.4V	32	-	-
I_{OL}at V_{OL} (mA) at 0.2V	-	-	40

Notes:

1. N must be greater than or equal to 0.653 and less than or equal to 0.68.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 204 of 947

GTL +

Figure 3-86 shows a sample circuit illustrating a valid termination technique for GTLP.

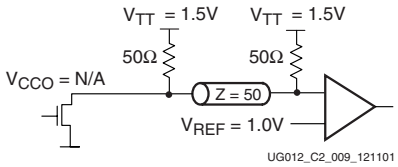


Figure 3-86: **GTLP Terminated**

Table 3-41 lists DC voltage specifications.

Table 3-41: **GTLP Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	-	-	-
$V_{REF} = N \times V_{TT}$ (1)	0.88	1.0	1.12
V_{TT}	1.35	1.5	1.65
$V_{IH} \geq V_{REF} + 0.1$	0.98	1.1	-
$V_{IL} \leq V_{REF} - 0.1$	-	0.9	1.02
V_{OH}	-	-	-
V_{OL}	0.3	0.45	0.6
I_{OH} at V_{OH} (mA)	-	-	-
I_{OL}at V_{OL} (mA) at 0.6V	36	-	-
I_{OL}at V_{OL} (mA) at 0.3V	-	-	48

Notes:

1. N must be greater than or equal to 0.653 and less than or equal to 0.68.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 205 of 947

HSTL Class I

Figure 3-87 shows a sample circuit illustrating a valid termination technique for HSTL_I.

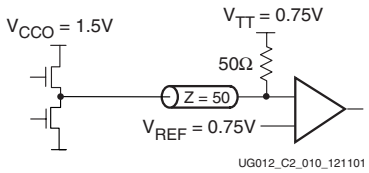


Figure 3-87: **Terminated HSTL Class I**

Table 3-42 lists DC voltage specifications.

Table 3-42: **HSTL Class I Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.40	1.50	1.60
V_{REF}	0.68	0.75	0.90
V_{TT}	-	$V_{CCO} \times 0.5$	-
V_{IH}	$V_{REF} + 0.1$	-	-
V_{IL}	-	-	$V_{REF} - 0.1$
V_{OH}	$V_{CCO} - 0.4$	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL} at V_{OL} (mA)	8	-	-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 206 of 947

HSTL Class II

Figure 3-88 shows a sample circuit illustrating a valid termination technique for HSTL_II.

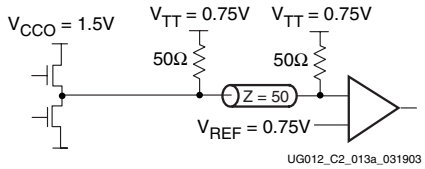


Figure 3-88: **Terminated HSTL Class II**

Table 3-43 lists DC voltage specifications.

Table 3-43: **HSTL Class II Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.40	1.50	1.60
V_{REF} (1)	-	0.75	-
V_{TT}	-	$V_{CCO} \times 0.5$	-
V_{IH}	$V_{REF} + 0.1$	-	-
V_{IL}	-	-	$V_{REF} - 0.1$
V_{OH}	$V_{CCO} - 0.4$	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–16	-	-
I_{OL} at V_{OL} (mA)	16	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 207 of 947

HSTL Class III

Figure 3-89 shows a sample circuit illustrating a valid termination technique for HSTL_III.

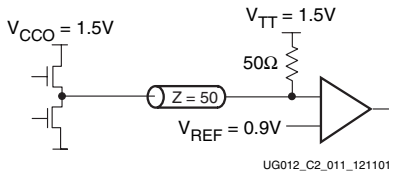


Figure 3-89: **Terminated HSTL Class III**

Table 3-44 lists DC voltage specifications.

Table 3-44: **HSTL Class III Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.40	1.50	1.60
V_{REF} (1)	-	0.90	-
V_{TT}	-	V_{CCO}	-
V_{IH}	V_{REF} + 0.1	-	-
V_{IL}	-	-	V_{REF} – 0.1
V_{OH}	V_{CCO} – 0.4	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL} at V_{OL} (mA)	24	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 208 of 947

HSTL Class IV

Figure 3-90 shows a sample circuit illustrating a valid termination technique for HSTL_IV.

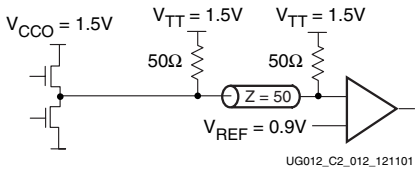


Figure 3-90: **Terminated HSTL Class IV**

Table 3-45 lists DC voltage specifications.

Table 3-45: **HSTL Class IV Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.40	1.50	1.60
V_{REF}	-	0.90	-
V_{TT}	-	V_{CCO}	-
V_{IH}	V_{REF} + 0.1	-	-
V_{IL}	-	-	V_{REF} – 0.1
V_{OH}	V_{CCO} – 0.4	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL}at V_{OL} (mA)	48	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 209 of 947

HSTL Class I (1.8V)

Figure 3-91 shows a sample circuit illustrating a valid termination technique for HSTL_I.

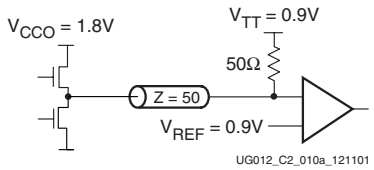


Figure 3-91: **Terminated HSTL Class I (1.8V)**

Table 3-46 lists DC voltage specifications.

Table 3-46: **HSTL Class I (1.8V) Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.7	1.8	1.9
V_{REF}	0.8	0.9	1.1
V_{TT}	-	$V_{CCO} \times 0.5$	-
V_{IH}	$V_{REF} + 0.1$	-	-
V_{IL}	-	-	$V_{REF} - 0.1$
V_{OH}	$V_{CCO} - 0.4$	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL} at V_{OL} (mA)	8	-	-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 210 of 947

HSTL Class II (1.8V)

Figure 3-92 shows a sample circuit illustrating a valid termination technique for HSTL_II.

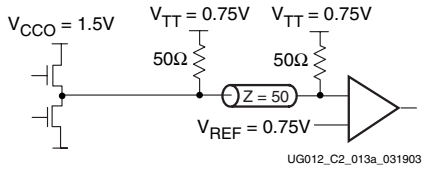


Figure 3-92: **Terminated HSTL Class II (1.8V)**

Table 3-47 lists DC voltage specifications.

Table 3-47: **HSTL Class II (1.8V) Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.7	1.8	1.9
V_{REF} (1)	-	0.9	-
V_{TT}	-	$V_{CCO} \times 0.5$	-
V_{IH}	$V_{REF} + 0.1$	-	-
V_{IL}	-	-	$V_{REF} - 0.1$
V_{OH}	$V_{CCO} - 0.4$	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–16	-	-
I_{OL} at V_{OL} (mA)	16	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 211 of 947

HSTL Class III (1.8V)

Figure 3-93 shows a sample circuit illustrating a valid termination technique for HSTL_III.

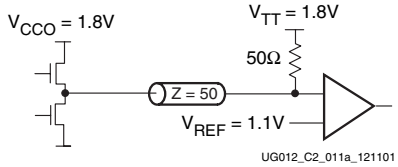


Figure 3-93: **Terminated HSTL Class III (1.8V)**

Table 3-48 lists DC voltage specifications.

Table 3-48: **HSTL Class III (1.8V) Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.7	1.8	1.9
V_{REF} (1)	-	1.1	-
V_{TT}	-	V_{CCO}	-
V_{IH}	V_{REF} + 0.1	-	-
V_{IL}	-	-	V_{REF} – 0.1
V_{OH}	V_{CCO} – 0.4	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL} at V_{OL} (mA)	24	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 212 of 947

HSTL Class IV (1.8V)

Figure 3-94 shows a sample circuit illustrating a valid termination technique for HSTL_IV.

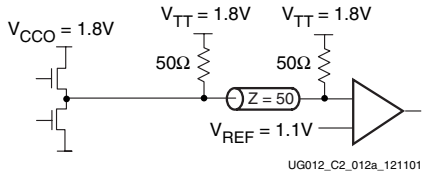


Figure 3-94: **Terminated HSTL Class IV (1.8V)**

Table 3-49 lists DC voltage specifications.

Table 3-49: **HSTL Class IV (1.8V) Voltage Specification**

Parameter	MIN	TYP	MAX
V_{CCO}	1.7	1.8	1.9
V_{REF}	-	1.1	-
V_{TT}	-	V_{CCO}	-
V_{IH}	V_{REF} + 0.1	-	-
V_{IL}	-	-	V_{REF} – 0.1
V_{OH}	V_{CCO} – 0.4	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–8	-	-
I_{OL}at V_{OL} (mA)	48	-	-

Notes:

1. Per EIA/JESD8-6, "The value of V_{REF} is to be selected by the user to provide optimum noise margin in the use conditions specified by the user.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 213 of 947

SSTL2_I

Figure 3-95 shows a sample circuit illustrating a valid termination technique for SSTL2_I.




Figure 3-95: **Terminated SSTL2_I**

Table 3-50 lists DC voltage specifications.

Table 3-50: **SSTL2_I Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	2.3	2.5	2.7
$V_{REF} = 0.5 \times V_{CCO}$	1.13	1.25	1.38
$V_{TT} = V_{REF} + N^{(1)}$	1.11	1.25	1.39
$V_{IH} \geq V_{REF} + 0.18$	1.3	1.43	$3.0^{(2)}$
$V_{IL} \leq V_{REF} - 0.18$	$-0.3^{(3)}$	1.07	1.2
$V_{OH} \geq V_{REF} + 0.61^{(4)}$	1.74	1.84	1.99
$V_{OL} \leq V_{REF} - 0.61^{(4)}$	0.52	0.66	0.77
I_{OH} at V_{OH} (mA)	–8.1	-	-
I_{OL}at V_{OL} (mA)	8.1	-	-

Notes:

1. N must be greater than or equal to -0.04 and less than or equal to 0.04.
2. V_{IH} maximum is V_{CCO} + 0.3.
3. V_{IL} minimum does not conform to the formula.
4. V_{OH} and V_{OL} will be different for SSTL2_I_DCI, because it uses a controlled-impedance driver.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 214 of 947

SSTL2_II

Figure 3-96 shows a sample circuit illustrating a valid termination technique for SSTL2_II.

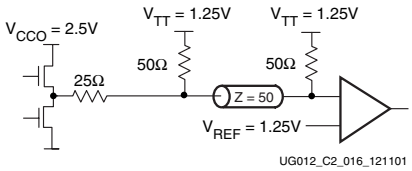


Figure 3-96: **Terminated SSTL2_II**

Table 3-51 lists DC voltage specifications.

Table 3-51: **SSTL2_II Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	2.3	2.5	2.7
$V_{REF} = 0.5 \times V_{CCO}$	1.13	1.25	1.38
$V_{TT} = V_{REF} + N^{(1)}$	1.11	1.25	1.42
$V_{IH} \geq V_{REF} + 0.15$	1.30	1.43	$3.0^{(2)}$
$V_{IL} \leq V_{REF} - 0.15$	$-0.3^{(3)}$	1.07	1.2
$V_{OH} \geq V_{REF} + 0.8^{(4)}$	1.93	2.06	-
$V_{OL} \leq V_{REF} - 0.8^{(4)}$	-	0.44	0.55
I_{OH} at V_{OH} (mA)	–16.2	-	-
I_{OL}at V_{OL} (mA)	16.2	-	-

Notes:

1. N must be greater than or equal to –0.04 and less than or equal to 0.04.
2. V_{IH} maximum is V_{CCO} + 0.3.
3. V_{IL} minimum does not conform to the formula.
4. V_{OH} and V_{OL} will be different for SSTL2_II_DCI, because it uses a controlled-impedance driver.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 215 of 947

SSTL18_II

Figure 3-97 shows a sample circuit illustrating a valid termination technique for SSTL18_II.

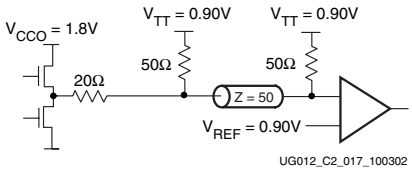


Figure 3-97: **Terminated SSTL18_II**

Table 3-52 lists DC voltage specifications.

Table 3-52: **SSTL18_II Voltage Specifications (JESD8-15)**

Parameter	Min	Typ	Max
V_{CCO}	1.7	1.8	1.9
$V_{REF} = 0.5 \times V_{CCO}$	0.833	0.9	0.969
$V_{TT} = V_{REF} + N^{(1)}$	0.793	0.9	1.009
$V_{IH} \geq V_{REF} + 0.15$	0.958		2.2
$V_{IL} \leq V_{REF} - 0.15$	-0.3		0.844
$V_{OH} \geq V_{REF} + 0.8^{(4)}$	1.396		
$V_{OL} \leq V_{REF} - 0.8^{(4)}$			0.406
I_{OH} at V_{OH} (mA)	-13.4		
I_{OL} at V_{OL} (mA)	13.4		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 216 of 947

PCI33_3, PCI66_3, and PCI-X

Table 3-53 lists DC voltage specifications.

Table 3-53: **PCI33_3, PCI66_3, and PCI-X Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	3.0	3.3	3.5
V_{REF}	-	-	-
V_{TT}	-	-	-
$V_{IH} = 0.5 \times V_{CCO}$	1.5	1.65	$V_{CCO} + 0.5$
$V_{IL} = 0.3 \times V_{CCO}$	– 0.5	0.99	1.08
$V_{OH} = 0.9 \times V_{CCO}$	2.7	-	-
$V_{OL} = 0.1 \times V_{CCO}$	-	-	0.36
I_{OH} at V_{OH} (mA)	(Note 1)	-	-
I_{OL}at V_{OL} (mA)	(Note 1)	-	-

Notes:

1. Tested according to the relevant specification.

LVTTL

Table 3-54 lists DC voltage specifications.

Table 3-54: **LVTTL Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	3.0	3.3	3.6
V_{REF}	-	-	-
V_{TT}	-	-	-
V_{IH}	2.0	-	3.6
V_{IL}	–0.5	-	0.8
V_{OH}	2.4	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–24	-	-
I_{OL}at V_{OL} (mA)	24	-	-

Notes:

1. $V_{OL}$and V_{OH} for lower drive currents are sample tested.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 217 of 947

LVCMOS15

Table 3-55 lists DC voltage specifications.

Table 3-55: **LVCMOS15 Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	-	1.5	-
V_{REF}	-	-	-
V_{TT}	-	-	-
$V_{IH} = 0.7 \times V_{CCO}$	1.05	-	1.65
$V_{IL} = 0.2 \times V_{CCO}$	–0.5	-	0.3
$V_{OH} = V_{CCO} - 0.45$	-	1.05	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–16	-	-
I_{OL}at V_{OL} (mA)	16	-	-

LVCMOS18

Table 3-56 lists DC voltage specifications.

Table 3-56: **LVCMOS18 Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	1.7	1.8	1.9
V_{REF}	-	-	-
V_{TT}	-	-	-
$V_{IH} = 0.7 \times V_{CCO}$	1.19	-	1.95
$V_{IL} = 0.2 \times V_{CCO}$	–0.5	-	0.4
$V_{OH} = V_{CCO} - 0.4$	1.3	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–16	-	-
I_{OL}at V_{OL} (mA)	16	-	-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 218 of 947

LVCMOS25

Table 3-57 lists DC voltage specifications.

Table 3-57: **LVCMOS25 Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	2.3	2.5	2.7
V_{REF}	-	-	-
V_{TT}	-	-	-
V_{IH}	1.7	-	2.7
V_{IL}	–0.5	-	0.7
V_{OH}	1.9	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–24	-	-
I_{OL}at V_{OL} (mA)	24	-	-

LVCMOS33

Table 3-58 lists DC voltage specifications.

Table 3-58: **LVCMOS33 Voltage Specifications**

Parameter	Min	Typ	Max
V_{CCO}	3.0	3.3	3.6
V_{REF}	-	-	-
V_{TT}	-	-	-
V_{IH}	2.0	-	3.6
V_{IL}	–0.5	-	0.8
V_{OH}	2.6	-	-
V_{OL}	-	-	0.4
I_{OH} at V_{OH} (mA)	–24	-	-
I_{OL}at V_{OL} (mA)	24	-	-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 219 of 947

Digitally Controlled Impedance (DCI)

Introduction

As FPGAs get bigger and system clock speeds get faster, PC board design and manufacturing becomes more difficult. With ever faster edge rates, maintaining signal integrity becomes a critical issue. Designers must make sure that most PC board traces are terminated properly to avoid reflections or ringing.

To terminate a trace, resistors are traditionally added to make the output and/or input match the impedance of the receiver or driver to the impedance of the trace. However, due to the increase in device I/O counts, adding resistors close to the device pins increases the board area and component count, and in some cases might even be physically impossible. To address these issues and to achieve better signal integrity, Xilinx developed a new I/O technology for the Virtex-II and Virtex-II Pro device families, Digitally Controlled Impedance (DCI).

DCI adjusts the output impedance or input termination to accurately match the characteristic impedance of the transmission line. DCI actively adjusts the impedance of the I/O to equal an external reference resistance. This compensates for changes in I/O impedance due to process variation. It also continuously adjusts the impedance of the I/O to compensate for variations of temperature and supply voltage fluctuations.

In the case of controlled impedance drivers, DCI controls the driver impedance to match two reference resistors, or optionally, to match half the value of these reference resistors. DCI eliminates the need for external series termination resistors.

DCI provides the parallel or series termination for transmitters or receivers. This eliminates the need for termination resistors on the board, reduces board routing difficulties and component count, and improves signal integrity by eliminating stub reflection. Stub reflection occurs when termination resistors are located too far from the end of the transmission line. With DCI, the termination resistors are as close as possible to the output driver or the input buffer, thus, eliminating stub reflections.

Xilinx DCI

DCI uses two multi-purpose reference pins in each bank to control the impedance of the driver or the parallel termination value for all of the I/Os of that bank. The N reference pin (VRN) must be pulled up to V_{CCO} by a reference resistor, and the P reference pin (VRP) must be pulled down to ground by another reference resistor. The value of each reference resistor should be equal to the characteristic impedance of the PC board traces, or should be twice that value (configuration option).

When a DCI I/O standard is used on a particular bank, the two multi-purpose reference pins cannot be used as regular I/Os. However, if DCI I/O standards are not used in the bank, these pins are available as regular I/O pins. Check the Virtex-II Pro pinout for detailed pin descriptions.

DCI adjusts the impedance of the I/O by selectively turning transistors in the I/Os on or off. The impedance is adjusted to match the external reference resistors. The impedance adjustment process has two phases. The first phase, which compensates for process variations, is done during the device startup sequence. The second phase, which maintains the impedance in response to temperature and supply voltage changes, begins immediately after the first phase and continues indefinitely, even while the part is operating. By default, the DONE pin does not go High until the first phase of the impedance adjustment process has completed.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 220 of 947

If users do not wish to have the second phase enabled, they should use the FreezeDCI option in BitGen. If FreezeDCI is used, Phase One is the only impedance adjustment.

For controlled impedance output drivers, the impedance can be adjusted either to match the reference resistors or half the resistance of the reference resistors. For on-chip termination, the termination is always adjusted to match the reference resistors.

DCI can configure output drivers to be the following types:

1. Controlled Impedance Driver (Source Termination)
2. Controlled Impedance Driver with Half Impedance (Source Termination)

It can also configure inputs to have he following types of on-chip terminations:

1. Input termination to V_{CCO} (Single Termination)
2. Input termination to $V_{CCO}/2$ (Split Termination, Thevenin equivalent)

For bidirectional operation, both ends of the line can be DCI-terminated permanently:

1. Driver with termination to V_{CCO} (Single Termination)
2. Driver with termination to $V_{CCO}/2$ (Split Termination, Thevenin equivalent)

Alternatively, bidirectional point-to-point lines can use controlled-impedance drivers (with 3-state buffers) on both ends.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 221 of 947

Controlled Impedance Driver (Source Termination)

Some I/O standards, such as LVCMOS, must have a drive impedance that matches the characteristic impedance of the driven line. DCI can provide controlled impedance output drivers that eliminate reflections without an external source termination. The impedance is set by the external reference resistors, whose resistance should be equal to the trace impedance.

The DCI I/O standards that support Controlled Impedance Driver are: LVDCI_15, LVDCI_18, LVDCI_25, and LVDCI_33. Figure 3-98 illustrates a controlled impedance driver inside Virtex-II Pro device.




Figure 3-98: **Controlled Impedance Driver**

Controlled Impedance Driver with Half Impedance (Source Termination)

DCI can also provide drivers with one half of the impedance of the reference resistors. The DCI I/O standards that support controlled impedance driver with half-impedance are LVDCI_DV2_15, LVDCI_DV2_18, and LVDCI_DV2_25.

Figure 3-99 illustrates a controlled driver with half impedance inside a Virtex-II Pro device. Note that reference resistors R must be $2 \cdot Z_0$ in order to match an impedance of Z_0.




Figure 3-99: **Controlled Impedance Driver with Half Impedance**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 222 of 947

Input Termination to V_{CCO} (Single Termination)

Some I/O standards, such as HSTL Class III, IV, etc., require an input termination to V_{CCO}. See Figure 3-100.

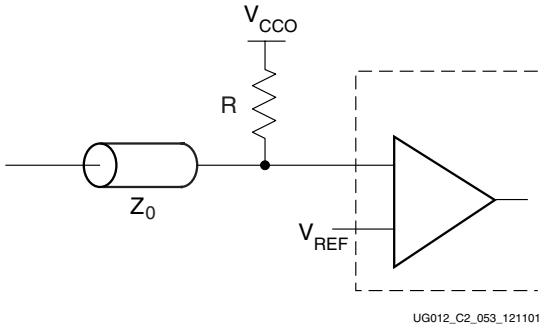


Figure 3-100: **Input Termination to V_{CCO} without DCI**

DCI can provide this termination to V_{CCO} using single termination. The termination resistance is set by the reference resistors. For GTL and HSTL standards, they should be controlled by 50-ohm reference resistors. The DCI I/O standards that support single termination are: GTL_DCI, GTLP_DCI, HSTL_III_DCI, HSTL_III_DCI_18, HSTL_IV_DCI., and HSTL_IV_DCI_18.

Figure 3-101 illustrates single termination inside a Virtex-II Pro device.

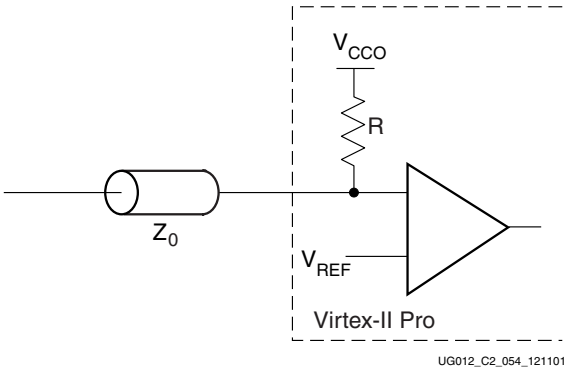


Figure 3-101: **Input Termination Using DCI Single Termination**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 223/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 223 of 947

Input Termination to $V_{CCO}/2$ (Split Termination)

Some I/O standards, such as HSTL Class I and II, require an input termination voltage of $V_{CCO}/2$. See Figure 3-102.

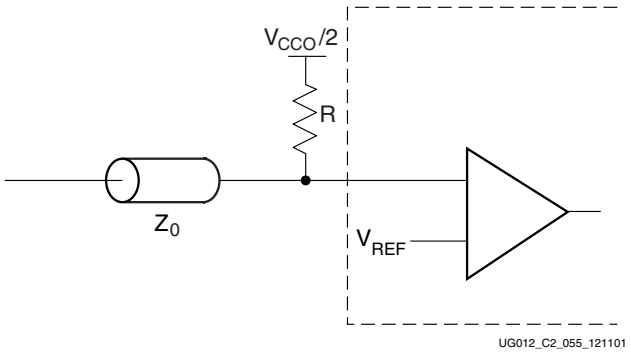


Figure 3-102: **Input Termination to $V_{CCO}/2$ without DCI**

This is equivalent to having a split termination composed of two resistors. One terminates to V_{CCO}, the other to ground. The resistor values are 2R. DCI provides termination to $V_{CCO}/2$ using split termination. The termination resistance is set by the external reference resistors, i.e., the resistors to V_{CC} and ground are each twice the reference resistor value. If users are planning to use HSTL or SSTL standards, the reference resistors should be 50-ohms. The DCI I/O standards that support split termination are: HSTL_I_DCI, HSTL_I_DCI_18, HSTL_II_DCI, HSTL_II_DCI_18, SSTL2_I_DCI, and SSTL2_II_DCI.

Figure 3-103 illustrates split termination inside a Virtex-II Pro device.

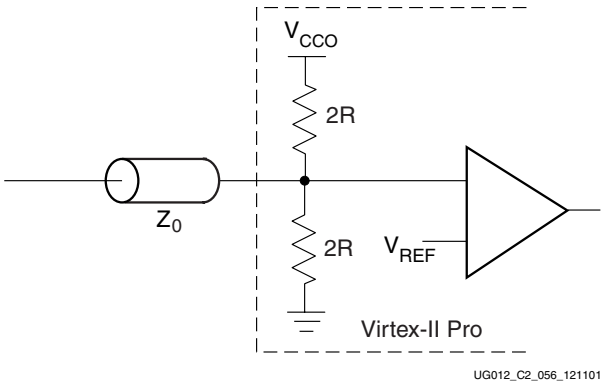


Figure 3-103: **Input Termination to $V_{CCO}/2$ Using DCI Split Termination**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 224 of 947

Driver with Termination to V_{CCO} (Single Termination)

Some I/O standards, such as HSTL Class IV, require an output termination to V_{CCO}. Figure 3-104 illustrates the output termination to V_{CCO}.

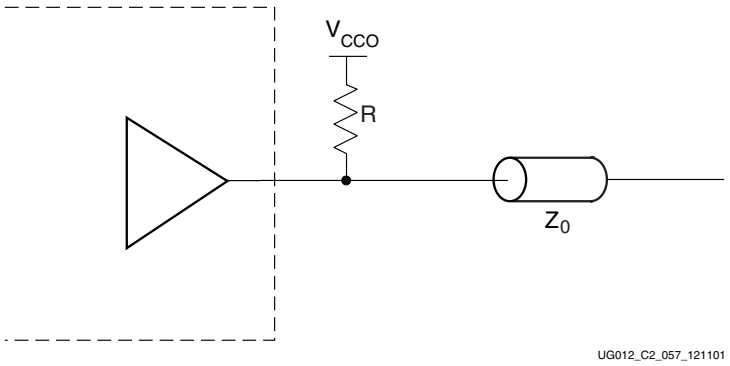


Figure 3-104: **Driver with Termination to V_{CCO} without DCI**

DCI can provide this termination to V_{CCO} using single termination. In this case, DCI only controls the impedance of the termination, but not the driver. If users are planning to use GTL or HSTL standards, the external reference resistors should be 50-ohms. The DCI I/O standards that support a driver with single termination are: GTL_DCI, GTLP_DCI, HSTL_IV_DCI, and HSTL_IV_DCI_18.

Figure 3-105 illustrates a driver with single termination inside a Virtex-II Pro device

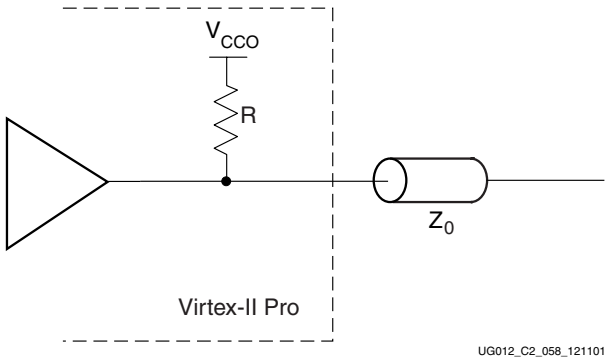


Figure 3-105: **Driver with Termination to V_{CCO} Using DCI Single Termination**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 225 of 947

Driver with Termination to $V_{CCO}/2$ (Split Termination)

Some I/O standards, such as HSTL Class II, require an output termination to $V_{CCO}/2$. See Figure 3-106.

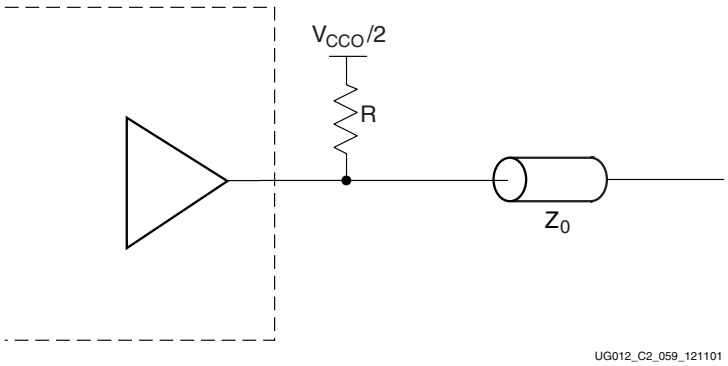


Figure 3-106: **Driver with Termination to $V_{CCO}/2$ without DCI**

DCI can provide this termination to $V_{CCO}/2$ using split termination. It only controls the impedance of the termination, but not the driver. For HSTL or SSTL standards, the external reference resistors should be 50-ohms. The DCI I/O standards that support a Driver with split termination are: HSTL_II_DCI, HSTL_II_DCI_18, and SSTL2_II_DCI.

Figure 3-107 illustrates a driver with split termination inside a Virtex-II Pro device.

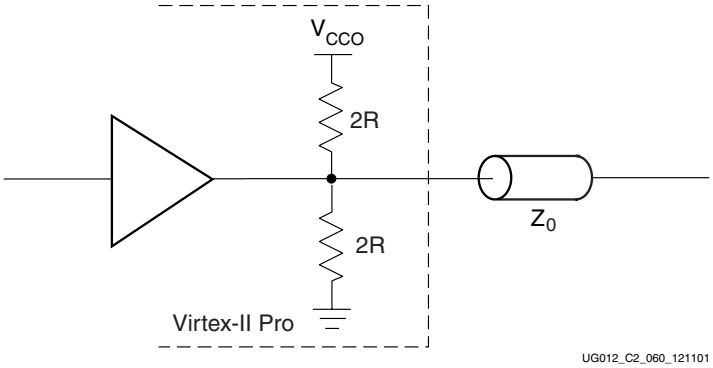


Figure 3-107: **Driver with Termination to $V_{CCO}/2$ Using DCI Split Termination**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 226 of 947

Software Support

This section lists the valid DCI I/O buffer library components and describes how to use DCI in the Xilinx software.

DCI I/O Buffer Library Components

The DCI input buffer library components, including global clock buffer, are the following:

- IBUFGDS_LVDSEXT_25_DCI
- IBUFGDS_LVDS_25_DCI
- IBUFDS_LVDSEXT_25_DCI
- IBUFDS_LVDS_25_DCI
- IBUFG_GTLP_DCI
- IBUFG_GTL_DCI
- IBUFG_HSTL_I_DCI
- IBUFG_HSTL_II_DCI
- IBUFG_HSTL_III_DCI
- IBUFG_HSTL_IV_DCI
- IBUFG_HSTL_I_DCI_18
- IBUFG_HSTL_II_DCI_18
- IBUFG_HSTL_III_DCI_18
- IBUFG_HSTL_IV_DCI_18
- IBUFG_LVDCI_15
- IBUFG_LVDCI_18
- IBUFG_LVDCI_25
- IBUFG_LVDCI_33
- IBUFG_LVDCI_DV2_15
- IBUFG_LVDCI_DV2_18
- IBUFG_LVDCI_DV2_25
- IBUFG_SSTL2_I_DCI
- IBUFG_SSTL2_II_DCI
- IBUF_GTLP_DCI
- IBUF_GTL_DCI
- IBUF_HSTL_I_DCI
- IBUF_HSTL_II_DCI
- IBUF_HSTL_III_DCI
- IBUF_HSTL_IV_DCI
- IBUF_LVDCI_15
- IBUF_LVDCI_18
- IBUF_LVDCI_25
- IBUF_LVDCI_33
- IBUF_LVDCI_DV2_15
- IBUF_LVDCI_DV2_18
- IBUF_LVDCI_DV2_25
- IBUF_SSTL2_I_DCI
- IBUF_SSTL2_II_DCI

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 227 of 947

The following are DCI output buffer library components:

- OBUF_GTLP_DCI
- OBUF_GTL_DCI
- OBUF_HSTL_I_DCI
- OBUF_HSTL_II_DCI
- OBUF_HSTL_III_DCI
- OBUF_HSTL_IV_DCI
- OBUF_HSTL_I_DCI_18
- OBUF_HSTL_II_DCI_18
- OBUF_HSTL_III_DCI_18
- OBUF_HSTL_IV_DCI_18
- OBUF_LVDCI_15
- OBUF_LVDCI_18
- OBUF_LVDCI_25
- OBUF_LVDCI_33
- OBUF_LVDCI_DV2_15
- OBUF_LVDCI_DV2_18
- OBUF_LVDCI_DV2_25
- OBUF_SSTL2_I_DCI
- OBUF_SSTL2_II_DCI

The following are DCI 3-state output buffer library components:

- OBUFT_GTLP_DCI
- OBUFT_GTL_DCI
- OBUFT_HSTL_I_DCI
- OBUFT_HSTL_II_DCI
- OBUFT_HSTL_III_DCI
- OBUFT_HSTL_IV_DCI
- OBUFT_HSTL_I_DCI_18
- OBUFT_HSTL_II_DCI_18
- OBUFT_HSTL_III_DCI_18
- OBUFT_HSTL_IV_DCI_18
- OBUFT_LVDCI_15
- OBUFT_LVDCI_18
- OBUFT_LVDCI_25
- OBUFT_LVDCI_33
- OBUFT_LVDCI_DV2_15
- OBUFT_LVDCI_DV2_18
- OBUFT_LVDCI_DV2_25
- OBUFT_SSTL2_I_DCI
- OBUFT_SSTL2_II_DCI

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 228 of 947

The following are DCI I/O buffer library components:

- IOBUF_GTLP_DCI
- IOBUF_GTL_DCI
- IOBUF_HSTL_II_DCI
- IOBUF_HSTL_IV_DCI
- IOBUF_SSTL2_II_DCI
- IOBUF_HSTL_II_DCI_18
- IOBUF_HSTL_IV_DCI_18
- IOBUF_LVDCI_15
- IOBUF_LVDCI_18
- IOBUF_LVDCI_25
- IOBUF_LVDCI_33
- IOBUF_LVDCI_DV2_15
- IOBUF_LVDCI_DV2_18
- IOBUF_LVDCI_DV2_25

How to Use DCI in the Software

There are two ways for users to use DCI for Virtex-II Pro devices:

1. Use the IOSTANDARD attribute in the constraint file.
2. Instantiate DCI input or output buffers in the HDL code.

IOSTANDARD Attribute

The IOSTANDARD attribute can be entered through the NCF or UCF file. The syntax is as follows:

```
NET <net name> IOSTANDARD = LVDCI_25;
```

Where *<net name>* is the name between the IPAD and IBUF or OPAD or OBUF. For HDL designs, this name is the same as the port name.

The following are valid DCI attributes for output drivers:

- LVDCI_15
- LVDCI_18
- LVDCI_25
- LVDCI_33
- LVDCI_DV2_15
- LVDCI_DV2_18
- LVDCI_DV2_25

The following are valid DCI attributes for terminations:

- GTL_DCI
- GTLP_DCI
- HSTL_I_DCI
- HSTL_II_DCI
- HSTL_III_DCI

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 229 of 947

- HSTL_IV_DCI
- HSTL_I_DCI_18
- HSTL_II_DCI_18
- HSTL_III_DCI_18
- HSTL_IV_DCI_18
- SSTL2_I_DCI
- SSTL2_II_DCI

VHDL Example

Instantiating DCI input and output buffers is the same as instantiating any other I/O buffers. Users must make sure that the correct I/O buffer names are used and follow the standard syntax of instantiation.

For example, to instantiate a HSTL Class I output DCI buffer, the following syntax can be used:

HSTL_DCI_buffer: OBUF_HSTL_I_DCI port map (I=>data_out, O=>data_out_DCI);

Below is an example VHDL code that instantiates four 2.5V LVDCI drivers and four HSTL Class I outputs.

```
-- Module: DCI_TEST
--
-- Description: VHDL example for DCI SelectIO-Ultra
-- Device: Virtex-II Pro Family
----------------------------------------------------------------------
library ieee;
use ieee.std_logic_1164.all;
use ieee.std_logic_unsigned.all;

entity dci_test is
port (clk, reset, ce, control : in std_logic;
  A, B : in std_logic_vector (3 downto 0);
  Dout : out std_logic_vector (3 downto 0);
  muxout : out std_logic_vector (3 downto 0));
end dci_test;

architecture dci_arch of dci_test is

--DCI output buffer component declaration
component OBUF_LVDCI_25 port (I : in std_logic; O : out std_logic);
end component;
attribute syn_black_box : boolean;
attribute black_box_pad_pin : string;
attribute syn_black_box of OBUF_LVDCI_25 : component is true;
attribute black_box_pad_pin of OBUF_LVDCI_25 : component is "O";

--HSTL Class I DCI output buffer component declaration
component OBUF_HSTL_I_DCI port (I : in std_logic; O: out std_logic);
end component;
attribute syn_black_box of OBUF_HSTL_I_DCI : component is true;
attribute black_box_pad_pin of OBUF_HSTL_I_DCI : component is "O";

signal muxout_int : std_logic_vector (3 downto 0);
signal dout_int : std_logic_vector (3 downto 0);

begin
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 230 of 947

```
process (clk, reset)
begin
  if (reset = '1') then
         dout_int<="0000";
    elsif (clk'event and clk='1') then
      dout_int<=dout_int+1;
end if;
end process;

process (controls, A, B, DOUT_INT)

begin
  if (control='1') then
    muxout_int<=A and B;
else
    muxout_int<=Dout_int;
  end if;
end process;

U0 : OBUF_LVDCI_25 port map(
  I=>dout_int(0),
  O=>dout(0));

U1 : OBUF_LVDCI_25 port map(
       I=>dout_int(1),
       O=>dout(1));
U2 : OBUF_LVDCI_25 port map(
       I=>dout_int(2),
       O=>dout(2));
U3 : OBUF_LVDCI_25 port map(
       I=>dout_int(3),
       O=>dout(3));

K0 : OBUF_HSTL_I_DCI port map(
  I=>muxout_int(0),
  O=>muxout(0));

K1 : OBUF_HSTL_I_DCI port map(
       I=>muxout_int(1),
       O=>muxout(1));
K2 : OBUF_HSTL_I_DCI port map(
       I=>muxout_int(2),
       O=>muxout(2));
K3 : OBUF_HSTL_I_DCI port map(
       I=>muxout_int(3),
       O=>muxout(3));

end dci_arch;
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 231 of 947

DCI in Virtex-II Pro Hardware

DCI works with single-ended I/O standards and the 2.5V LVDS I/O standard. DCI supports the following Virtex-II Pro standards:

LVDCI, LVDCI_DV2, GTL_DCI, GTLP_DCI, HSTL_I_DCI, HSTL_II_DCI, HSTL_III_DCI, HSTL_IV_DCI, HSTL_I_DCI_18, HSTL_II_DCI_18, HSTL_III_DCI_18, HSTL_IV_DCI_18, SSTL2_I_DCI, SSTL2_II_DCI, LVDS_25, and LVDSEXT_25.

To correctly use DCI in a Virtex-II Pro device, users must follow the following rules:

1. V_{CCO} pins must be connected to the appropriate V_{CCO} voltage based on the IOSTANDARDs in that bank.
2. Correct DCI I/O buffers must be used in the software either by using IOSTANDARD attributes or instantiations in the HDL code.
3. External reference resistors must be connected to multipurpose pins (VRN and VRP) in the bank. These two multipurpose pins cannot be used as regular user I/Os. Refer to the Virtex-II Pro pinouts for the specific pin locations. Pin VRN must be pulled up to V_{CCO} by its reference resistor. Pin VRP must be pulled down to ground by its reference resistor.
4. The value of the external reference resistors should be selected to give the desired output impedance. If using GTL_DCI, HSTL_DCI, or SSTL_DCI I/O standards, then they should be 50Ω.
5. The values of the reference resistors must be within the supported range (20Ω – 100Ω).
6. Follow the DCI I/O banking rules:
   a. V_{REF} must be compatible for all of the inputs in the same bank.
   b. V_{CCO} must be compatible for all of the inputs and outputs in the same bank.
   c. No more than one DCI I/O standard using Single Termination type is allowed per bank.
   d. No more than one DCI I/O standard using Split Termination type is allowed per bank.
   e. Single Termination and Split Termination, Controlled Impedance Driver, and Controlled Impedance Driver with Half Impedance can co-exist in the same bank.
7. Avoid the simultaneous occurrence of these three conditions:
   a. The D0-D7, INIT, or DOUT pins are used as I/O after configuration
   b. One (or more) of those pins is a DCI input or output
   c. The "DCIUpdateMode" option is set to "Quiet"

   Otherwise, these I/Os will not function properly. In the case of an output, the I/O will be put into a 3-state condition, or will not have the correct termination. In the case of an input, the I/O will not have the correct termination.

   This does not affect the RDWR_B and CS_B signals, which are also dual-purpose configuration pins.

The behavior of DCI 3-state outputs is as follows:

If a LVDCI or LVDCI_DV2 driver is in 3-state, the driver is 3-stated. If a Driver with Single or Split Termination is in 3-state, the driver is 3-stated but the termination resistor remains.

The following section lists any special care actions that must be taken for each DCI I/O standard.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 232 of 947

LVDCI_15, LVDCI_18, LVDCI_25, LVDCI_33

Using these buffers configures the outputs as controlled impedance drivers. The number extension at the end indicates the V_{CCO} voltage that should be used. For example, 15 means V_{CCO}=1.5V, etc. There is no slew rate control or drive strength settings for LVDCI drivers.

LVDCI_DV2_15, LVDCI_DV2_18, LVDCI_DV2_25

Using these buffers configures the outputs as controlled drivers with half impedance. The number extension at the end indicates the V_{CCO} voltage that should be used. For example, 15 means V_{CCO}=1.5V, etc. There is no slew rate control or drive strength settings for LVDCI_DV2 drivers.

GTL_DCI

GTL does not require a V_{CCO} voltage. However, for GTL_DCI, V_{CCO} must be connected to 1.2V. GTL_DCI provides single termination to V_{CCO} for inputs or outputs.

GTLP_DCI

GTLP does not require a V_{CCO} voltage. However, for GTLP_DCI, V_{CCO} must be connected to 1.5V. GTLP_DCI provides single termination to V_{CCO} for inputs or outputs.

HSTL_ I_DCI, HSTL_ III_DCI, HSTL_ I_DCI_18, HSTL_ III_DCI_18

HSTL_I_DCI provides split termination to $V_{CCO}/2$ for inputs. HSTL_III_DCI provides single termination to V_{CCO} for inputs.

HSTL_ II_DCI, HSTL_ IV_DCI, HSTL_ II_DCI_18, HSTL_ IV_DCI_18

HSTL_II_DCI provides split termination to $V_{CCO}/2$ for inputs or outputs. HSTL_IV_ DCI provides single termination to V_{CCO} for inputs or outputs.

SSTL2_ I_DCI, SSTL2_II_DCI

SSTL2_I_DCI and SSTL2_II_DCI provide split termination to $V_{CCO}/2$ for inputs. These I/O standards provide SSTL compatibility. Note that SSTL2_I_DCI and SSTL2_II_DCI have V_{OH} and V_{OL} levels that are different than non-DCI SSTL2_I and SSTL2_II levels.

Answer Record 13012, available at **support.xilinx.com**, provides additional information on using DCI.

LVDS_25_DCI, LVDSEXT_25_DCI

LVDS_25_DCI and LVDSEXT_25_DCI provide split termination for the P and N inputs only. VRP and VRN should connect to 50Ω resistors.

Equivalently, it provides 100Ω differential impedance between the LVDS inputs.

DCI Usage Examples

- Figure 3-108 provides examples illustrating the use of the HSTL_I_DCI, HSTL_II_DCI, HSTL_III_DCI, and HSTL_IV_DCI I/O standards.
- Figure 3-109 provides examples illustrating the use of the SSTL2_I_DCI and SSTL2_II_DCI I/O standards.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 233 of 947

- Figure 3-110 provides examples illustrating the use of the LVDS_25_DCI and LVDSEXT_25_DCI I/O standards.


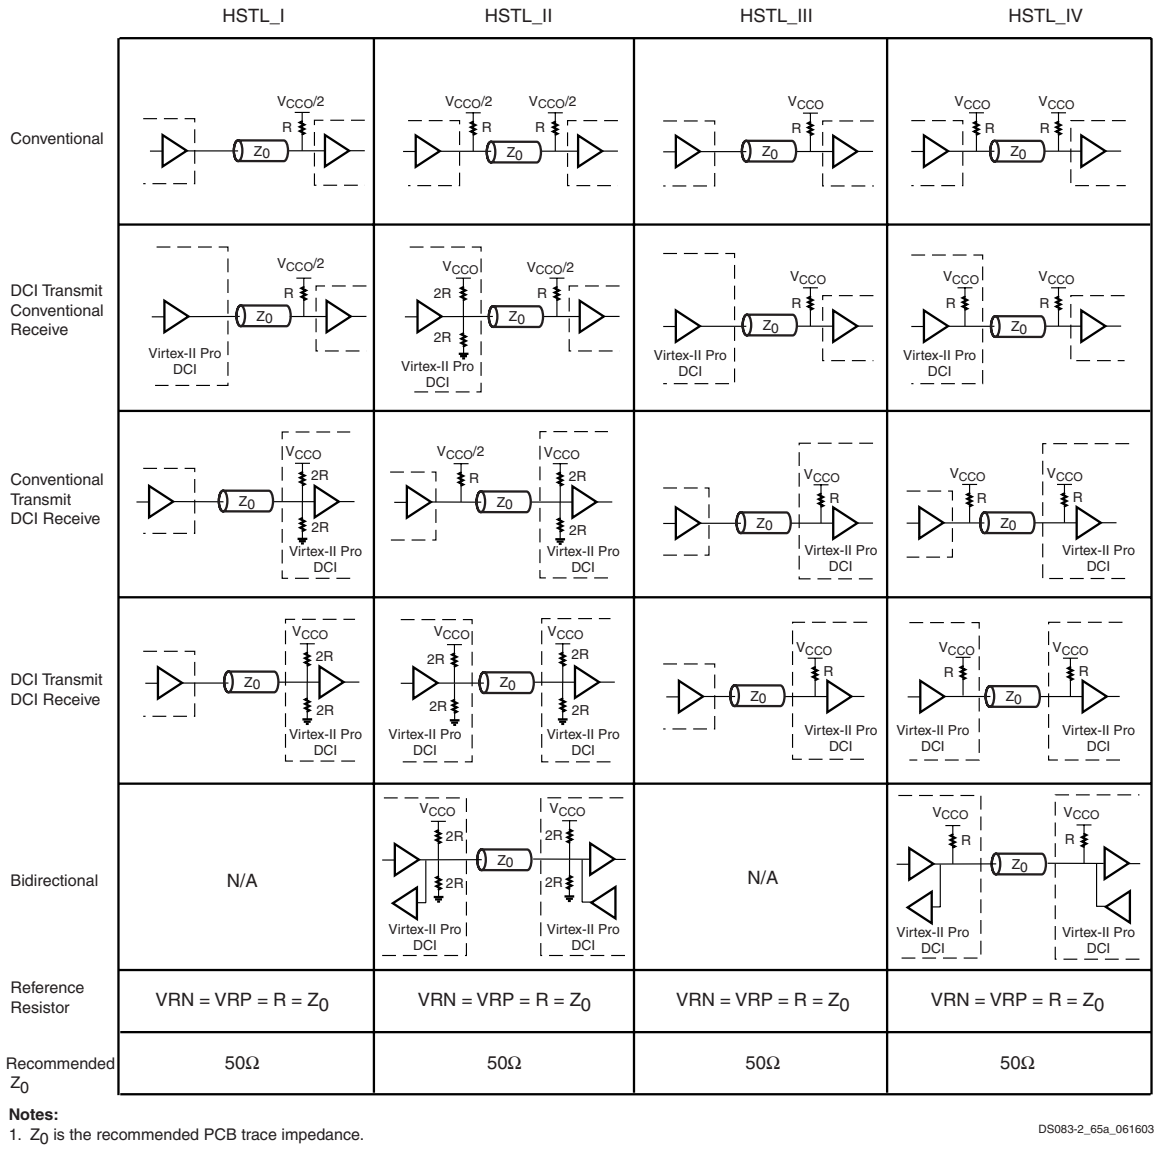


Figure 3-108: **HSTL DCI Usage Examples**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 234 of 947

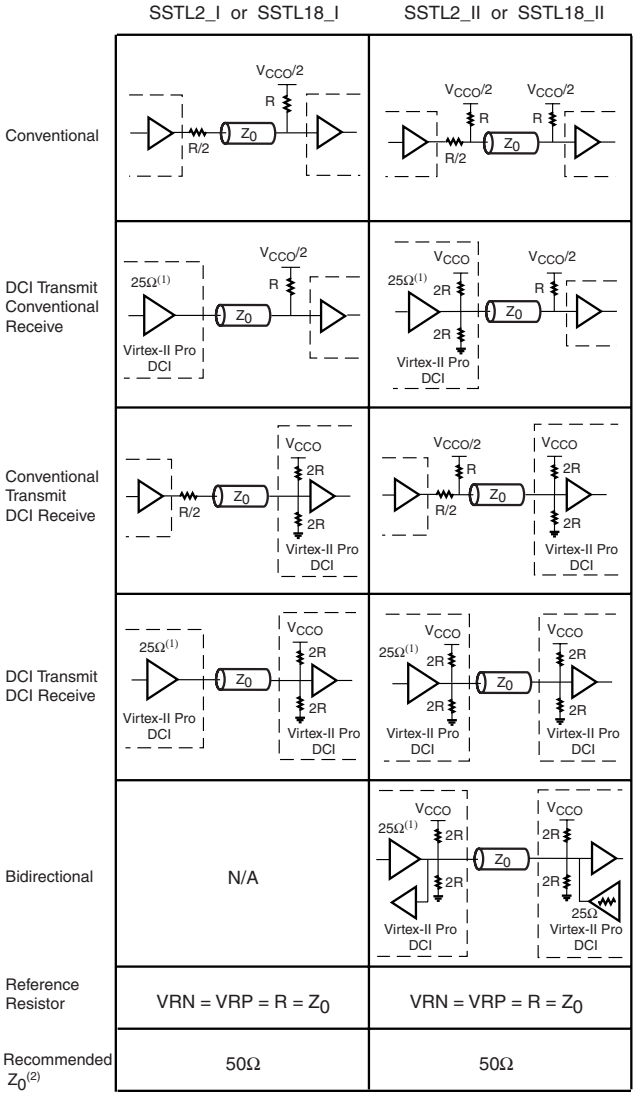

Notes:
1. The SSTL-compatible 25Ω series resistor is accounted for in the DCI buffer, and it is not DCI controlled.
2. Z_0 is the recommended PCB trace impedance.

Figure 3-109: **SSTL DCI Usage Examples**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 235/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 235 of 947

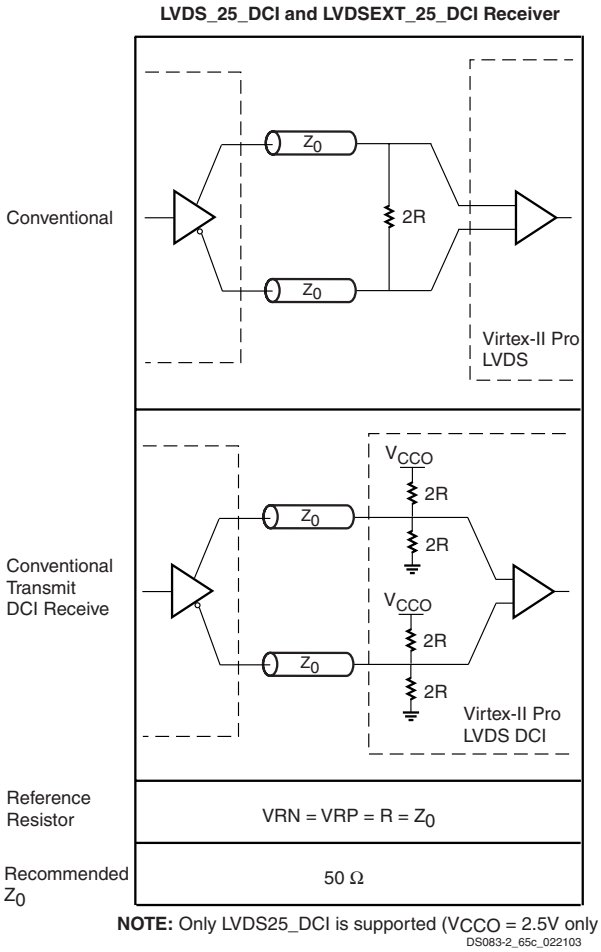


Figure 3-110: **LVDS DCI Usage Examples**

Double-Data-Rate (DDR) I/O

Introduction

Virtex-II Pro devices have dedicated registers in a single IOB to implement input, output, and output with 3-state control Double-Data-Rate (DDR) registers. Input and output DDR is directly accomplished by the two registers on each path, clocked by the rising edges (or falling edges) from two different clock nets. The two clock signals are generated by the DCM and must be 180 degrees out of phase. Output DDR with 3-state requires the use of four registers in the IOB clocked in a similar fashion. Since the introduction of DLLs, Xilinx devices can generate low-skew clock signals that are 180 degrees out of phase, with a 50/50 duty cycle. These clocks reach the DDR registers in the IOB via dedicated routing resources.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 236 of 947

Data Flow

Input DDR

Input DDR is accomplished via a single input signal driving two registers in the IOB. Both registers are clocked on the rising edge of their respective clocks. With proper clock forwarding, alternating bits from the input signal are clocked in on the rising edge of the two clocks, which are 180 degrees out of phase. Figure 3-111 depicts the input DDR registers and the signals involved.

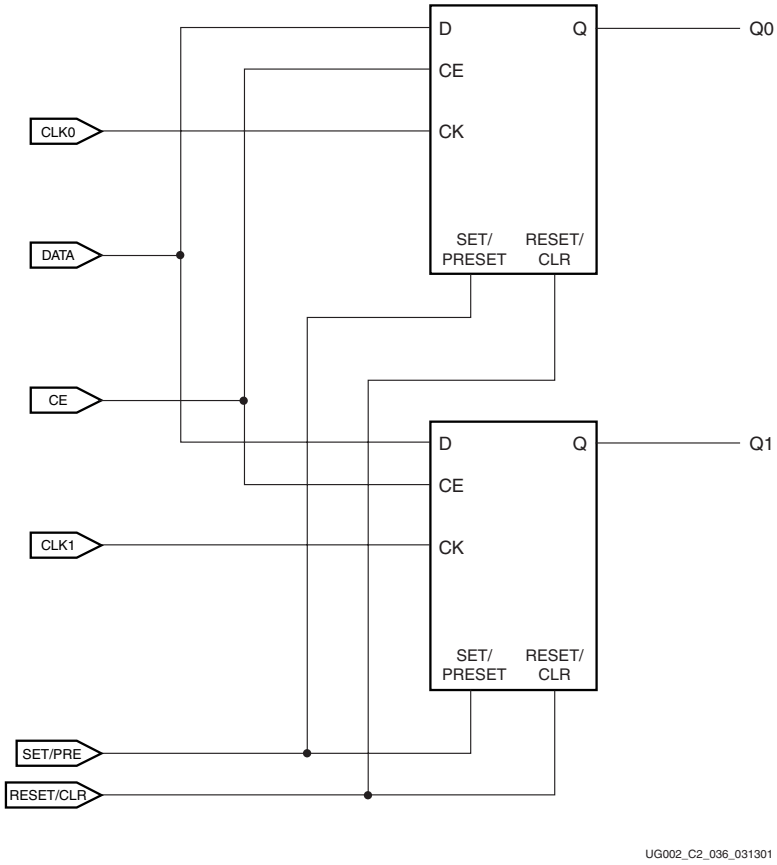


Figure 3-111: **Input DDR**

CLK0 and CLK1 are 180 degrees out of phase. Both registers share the SET/PRE and RESET/CLR lines. As shown in Figure 3-112, alternating bits on the DATA line are clocked in via Q0 and Q1 while CE is High. The clocks are shifted out of phase by the DCM (CLK0 and CLK180 outputs) or by the inverter available on the CLK1 clock input.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 237 of 947

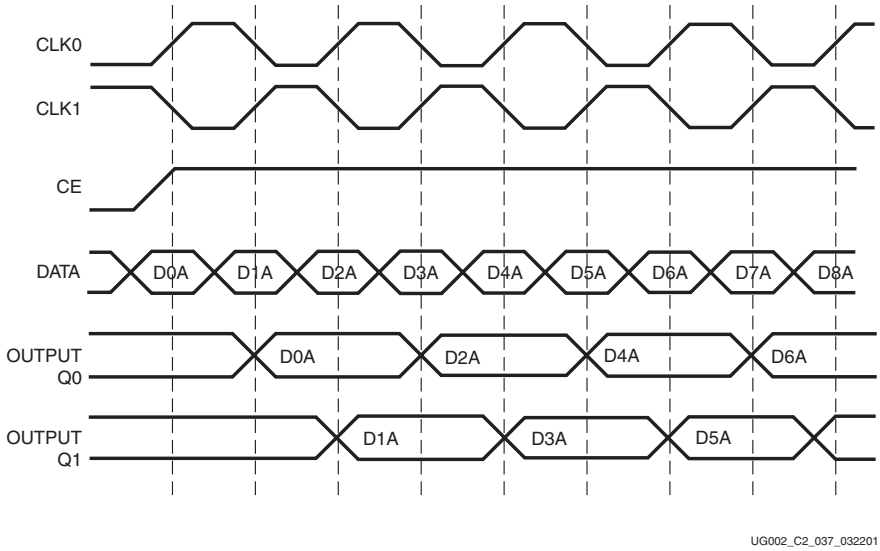


Figure 3-112: **Input DDR Timing Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 238 of 947

Output DDR

Output DDR registers are used to clock output from the chip at twice the throughput of a single rising-edge clocking scheme. Clocking for output DDR is the same as input DDR. The clocks driving both registers are 180 degrees out of phase. The DDR MUX selects the register outputs. The output consists of alternating bits from DATA_1 and DATA_2. Figure 3-113 depicts the output DDR registers and the signals involved.

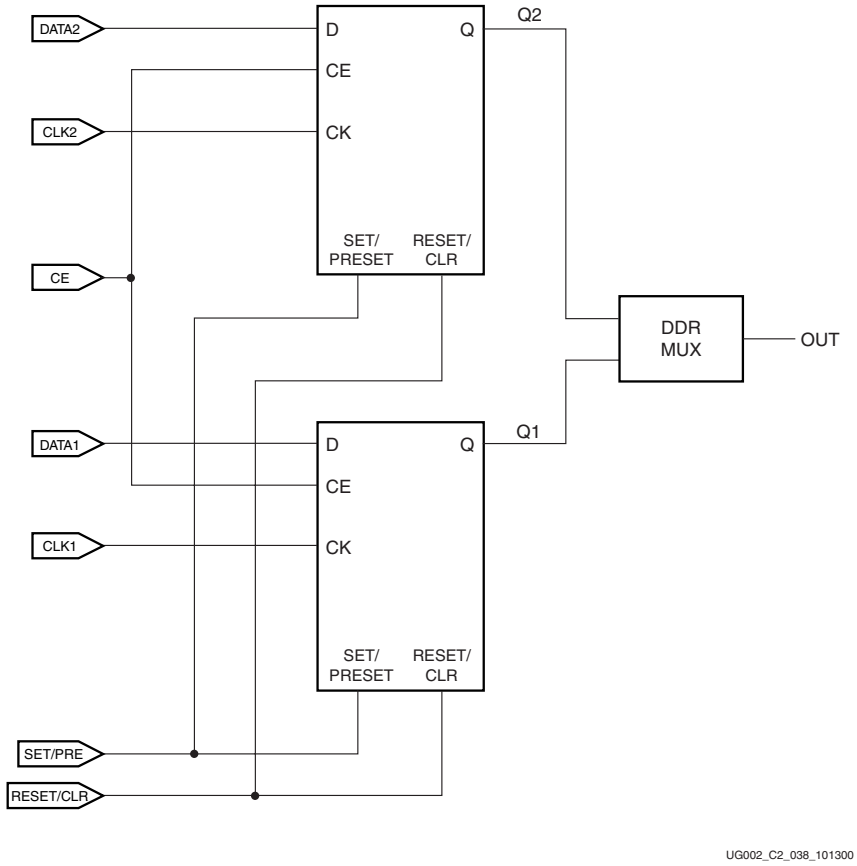


Figure 3-113: **Output DDR**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 239/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 239 of 947

Both registers share the SET/PRE and RESET/CLR line. Both registers share the CE line which must be High for outputs to be seen on Q1 and Q2. Figure 3-114 shows the data flow for the output DDR registers.

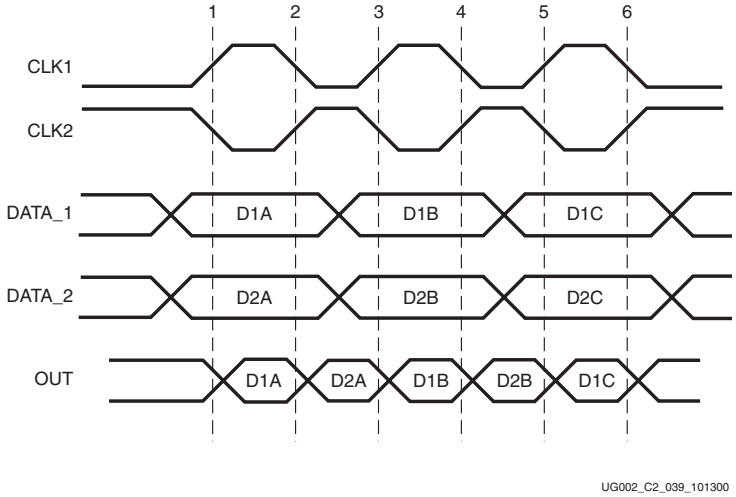


Figure 3-114: **Output DDR Timing Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 240 of 947

Output DDR With 3-State Control

The 3-state control allows the output to have one of two values, either the output from the DDR MUX or high impedance. The Enable signal is driven by a second DDR MUX (Figure 3-115). This application requires the instantiation of two output DDR primitives.

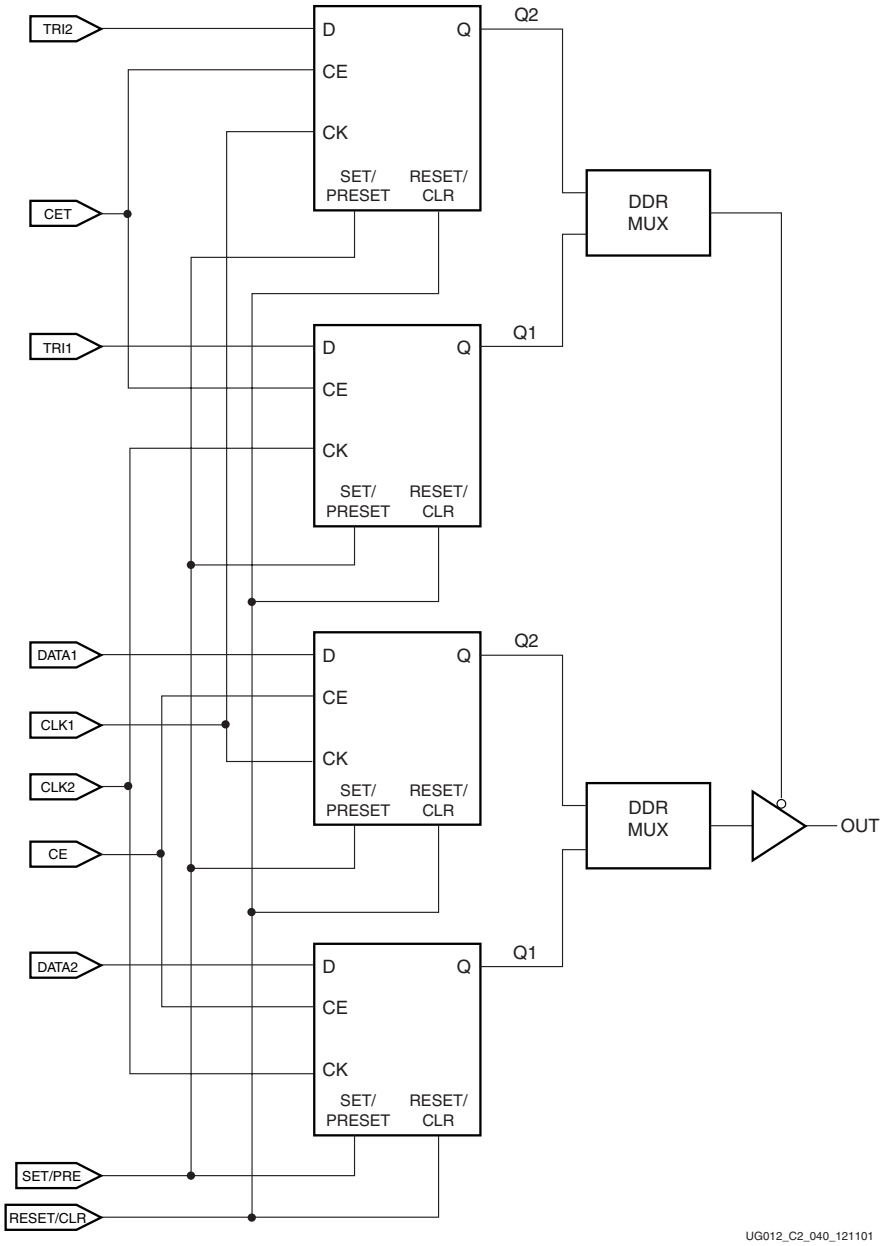


Figure 3-115: **Output DDR With 3-State Control**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 241 of 947

All four registers share the SET/PRESET and RESET/CLEAR lines. Two registers are required to accomplish the DDR task and two registers are required for the 3-state control. There are two Clock Enable signals, one for output DDRs performing the DDR function and another for the output DDRs performing the 3-state control function. Two 180 degree out of phase clocks are used. CLK1 clocks one of the DDR registers and a 3-state register. CLK2 clocks the other DDR register and the other 3-state register.

The DDR registers and 3-state registers are associated by the clock that is driving them. Therefore, the DDR register that is clocked by CLK1 is associated to the 3-state register being clocked by CLK1. The remaining two registers are associated by CLK2. If both 3-state registers are driving a logic High, the output sees a high impedance. If both 3-state registers are driving a logic Low, the output sees the values from the DDR MUX see Figure 3-116).

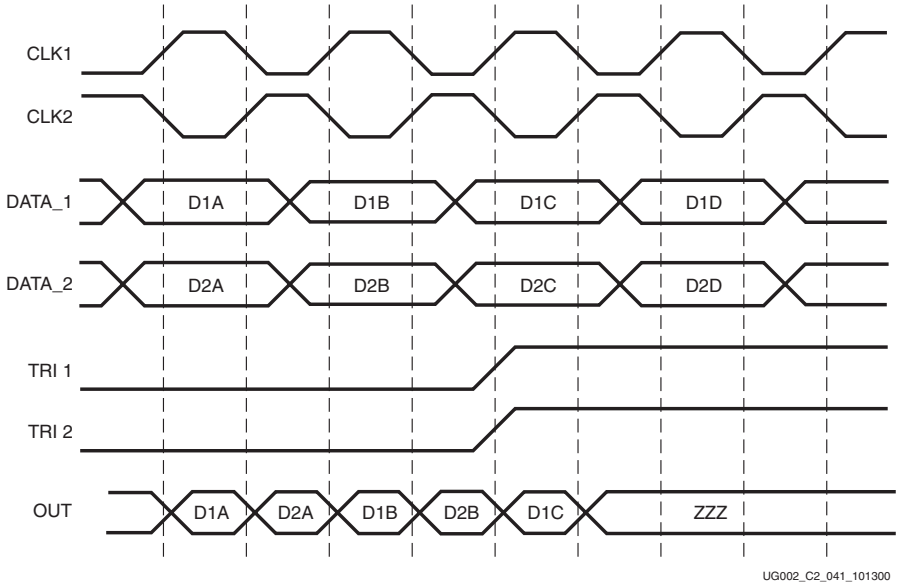


Figure 3-116: **Timing Diagram for Output DDR With 3-State Control**

When the 3-state registers are not driving the same logic value, the 3-state register being clocked by CLK1 is called TREG1. The other 3-state register TREG2 is clocked by CLK2. Similarly, the DDR register being clocked by CLK1 is called DREG1, and the other DDR register DREG2 is clocked by CLK2. If TREG1 is driving a logic High and TREG2 is driving a logic Low, the output sees a high impedance when CLK1 is High and the value out of DREG2 when CLK2 is High. If TREG2 is driving a logic High and TREG1 is driving a logic Low, the output sees a high impedance when CLK2 is High and the value out of DREG1 when CLK1 is High.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 242 of 947

Characteristics

- All registers in an IOB share the same SET/PRE and RESET/CLR lines.
- The 3-State and Output DDR registers have common clocks (OTCLK1 & OTCLK2).
- All signals can be inverted (with no added delay) inside the IOB.
- DDR MUXing is handled automatically within the IOB. There is no manual control of the MUX-select. This control is generated from the clock.
- When several clocks are used, and when using DDR registers, the floorplan of a design should take into account that the input clock to an IOB is shared with a pair of IOBs.

Library Primitives

Input DDR registers are inferred, and dedicated output DDR registers have been provided as primitives for Virtex-II Pro designs. Input DDR registers consist of two inferred registers that clock in a single data line on each edge. Generating 3-state output with DDR registers is as simple as instantiating a primitive.

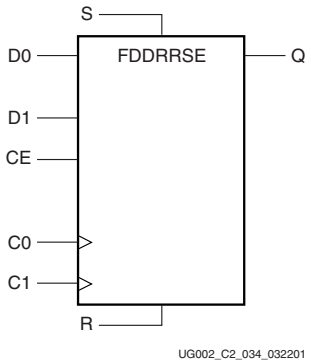


Figure 3-117: **FDDRRSE Symbol: DDR Flip-Flop With Clock Enable and Synchronous Reset and Set**

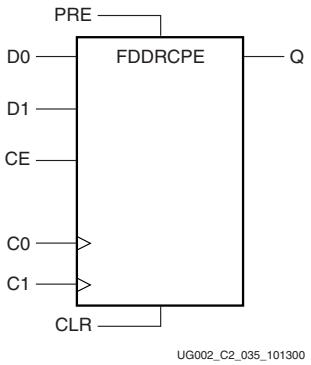


Figure 3-118: **FDDRCPE Symbol: DDR Flip-Flop With Clock Enable and Asynchronous PRESET and CLR**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 243 of 947

VHDL and Verilog Instantiation

Examples are available in "VHDL and Verilog Templates," page 242.

In VHDL, each template has a component declaration section and an architecture section. Each part of the template should be inserted within the VHDL design file. The port map of the architecture section should include the design signal names.

Constraints file syntax is provided where input registers need to be used. These settings force the input DDR registers into the IOB. The output registers should be instantiated and do not require any constraints file syntax to be pushed into the IOB.

Port Signals

FDDRRSE

Data Inputs - D0 and D1

D0 and D1 are the data inputs into the DDR flip-flop. Data on the D0 input is loaded into the flip-flop when R and S are Low and CE is High during a Low-to-High C0 clock transition. Data on the D1 input is loaded into the flip-flop when R and S are Low and CE is High during a Low-to-High C1 clock transition.

Clock Enable - CE

The enable pin affects the loading of data into the DDR flip-flop. When Low, new data is not loaded into the flip-flop. CE must be High to load new data into the flip-flop.

Clocks - C0 and C1

These two clocks are phase shifted 180 degrees (via the DLL) and allow selection of two separate data inputs (D0 and D1).

Synchronous Set - S
Synchronous Reset - R

The Reset (R) input, when High, overrides all other inputs and resets the output Low during any Low-to-High clock transition (C0 or C1). Reset has precedence over Set. When the Set (S) input is High and R is Low, the flip-flop is set, output High, during a Low-to-High clock transition (C0 or C1).

Data Output - Q

When power is applied, the flip-flop is asynchronously cleared and the output is Low.

During normal operation, The value of Q is either D0 or D1. The Data Inputs description above states how the value of Q is chosen.

FDDRCPE

Data Inputs - D0 and D1

D0 and D1 are the data inputs into the DDR flip-flop. Data on the D0 input is loaded into the flip-flop when PRE and CLR are Low and CE is High during a Low-to-High C0 clock transition. Data on the D1 input is loaded into the flip-flop when PRE and CLR are Low and CE is High during a Low-to-High C1 clock transition.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 244 of 947

Clock Enable - CE

The enable pin affects the loading of data into the DDR flip-flop. When Low, clock transitions are ignored and new data is not loaded into the flip-flop. CE must be High to load new data into the flip-flop.

Clocks - C0 and C1

These two clocks are phase shifted 180 degrees (via the DLL) and allow selection of two separate data inputs (D0 and D1).

Asynchronous Preset - PRE
Asynchronous Clear - CLR

The Preset (PRE) input, when High, sets the Q output High. When the Clear (CLR) input is High, the output is reset to Low.

Data Output - Q

When power is applied, the flip-flop is asynchronously cleared and the output is Low. During normal operation, The value of Q is either D0 or D1. The Data Inputs description above states how the value of Q is chosen.

Initialization in VHDL or Verilog

Output DDR primitives can be initialized in VHDL or Verilog code for both synthesis and simulation. For synthesis, the attributes are attached to the output DDR instantiation and are copied in the EDIF output file to be compiled by Xilinx tools. The VHDL code simulation uses a `generic` parameter to pass the attributes. The Verilog code simulation uses the `defparam` parameter to pass the attributes.

The DDR code examples (in VHDL ad Verilog) illustrate the following techniques.

Location Constraints

DDR instances can have LOC properties attached to them to constrain pin placement.

The LOC constraint uses the following form.

```
NET <net_name> LOC=A8;
```

where “A8” is a valid I/O pin location.

This device has a shared routing resource connecting the ICLK and OTCLK pins on pairs of IOBs. If two adjacent IOBs using DDR registers do not share the same clock signals on their clock pins (ICLK1, ICLK2, OTCLK1, and OTCLK2), one of the clock signals will be unroutable.

The IOB pairing is identical to the LVDS IOB pairs. Hence, the package pin-out table can also be used for pin assignment to avoid conflict.

Applications

DDR SDRAM

The DDR SDRAM is an enhancement to the Synchronous DRAM by effectively doubling the data throughput of the memory device. Commands are registered at every positive

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 245 of 947

clock edge. Input data is registered on both edges of the data strobe, and output data is referenced to both edges of the data strobe, as well as both edges of the clock.

Clock Forwarding

DDR can be used to forward a copy of the clock on the output. This can be useful for propagating a clock along with double-data-rate data that has an identical delay. It is also useful for multiple clock generation, where there is a unique clock driver for every clock load.

VHDL and Verilog Templates

VHDL and Verilog templates are available for output, output with 3-state enable, and input DDR registers.

Input DDR

To implement an Input DDR application, paste the following template in your code.

DDR_input.vhd

```
library IEEE;
use IEEE.STD_LOGIC_1164.ALL;

entity DDR_Input is

  Port (
    clk : in std_logic;
    d : in std_logic;
    rst : in std_logic;
    q1 : out std_logic;
    q2 : out std_logic
       );

end DDR_Input;

--Describe input DDR registers (behaviorally) to be inferred

architecture behavioral of DDR_Input is

begin

q1reg : process (clk, d, rst)

begin
   if rst='1' then --asynchronous reset, active high
     q1 <= '0';
   elsif clk'event and clk='1' then  --Clock event - posedge
     q1 <= d;

   end if;
end process;

q2reg : process (clk, d, rst)

begin
   if rst='1' then --asynchronous reset, active high
      q2 <= '0';
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 246 of 947

```
   elsif clk'event and clk='0' then  --Clock event - negedge
      q2 <= d;
   end if;
end process;

end behavioral;


-- NOTE: You must include the following constraints in the .ucf
-- file when running back-end tools,
-- in order to ensure that IOB DDR registers are used:
--
-- INST "q2_reg" IOB=TRUE;
-- INST "q1_reg" IOB=TRUE;
--
-- Depending on the synthesis tools you use, it may be required to
-- check the edif file for modifications to
-- original net names...in this case, Synopsys changed the
-- names: q1 and q2 to q1_reg and q2_reg
```

DDR_input.v

```
module DDR_Input (data_in , q1, q2, clk, rst);

input data_in, clk, rst;
output q1, q2;
reg q1, q2;


//Describe input DDR registers (behaviorally) to be inferred

always @ (posedge clk or posedge rst) //rising-edge DDR reg. and
asynchronous reset

  begin
  if (rst)
     q1 = 1'b0;
  else
     q1 = data_in;
  end

always @ (negedge clk or posedge rst) //falling-edge DDR reg. and
asynchronous reset

begin
  if (rst)
     q2 = 1'b0;
  else
     q2 = data_in;
  end

assign data_out = q1 & q2;



endmodule
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 247 of 947

```
/* NOTE: You must include the following constraints in the .ucf file
when running back-end tools, \
  in order to ensure that IOB DDR registers are used:

INST "q2_reg" IOB=TRUE;
INST "q1_reg" IOB=TRUE;

Depending on the synthesis tools you use, it may be required to check
the edif file for modifications to
original net names...in this case, Synopsys changed the names: q1 and q2
to q1_reg and q2_reg

*/
```

Output DDR

To implement an Output DDR application, paste the following template in your code.

DDR_out.vhd

```
library IEEE;
use IEEE.STD_LOGIC_1164.ALL;
-- pragma translate_off
LIBRARY UNISIM;
use UNISIM.VCOMPONENTS.ALL;
--pragma translate_on

entity DDR_Output is
  Port(
   clk : in std_logic; --clk and clk180 can be outputs from the DCM or
clk180 can be the
   clk180 : in std_logic;  --logical inverse of clk (the inverter is
located in the IOB and will be inferred.
   d0 : in std_logic;  --data in to fddr
   d1 : in std_logic;  --data in to fddr
   ce : in std_logic;  --clock enable
   rst : in std_logic;  --reset
   set : in std_logic;  --set
   q : out std_logic  --DDR output
   );

end DDR_Output;

architecture behavioral of DDR_Output is

component FDDRRSE
  port(
    Q  : out std_logic;
    D0 : in std_logic;
    D1 : in std_logic;
    C0 : in std_logic;
    C1 : in std_logic;
    CE : in std_logic;
    R  : in std_logic;
    S : in std_logic
    );
end component;

begin
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 248 of 947

```
U0: FDDRRSE
  port map (
    Q => q,
    D0 => d0,
    D1 => d1,
    C0 => clk,
    C1 => clk180,
    CE => ce,
    R => rst,
    S => set
    );


end behavioral;
```

DDR_out.v

```
module DDR_Output (d0 , d1, q, clk, clk180, rst, set, ce);

input d0, d1, clk, clk180, rst, set, ce;
output q;


//Synchronous Output DDR primitive instantiation

FDDRRSE U1  ( .D0(d0),
              .D1(d1),
              .C0(clk),
              .C1(clk180),
              .CE(ce),
              .R(rst),
              .S(set),
              .Q(q)
            );
endmodule
```

Output DDR With 3-State Enable

To implement an Output DDR with 3-state Enable, paste the following template in your code:

DDR_3state.vhd

```
library IEEE;
use IEEE.STD_LOGIC_1164.ALL;
-- pragma translate_off
LIBRARY UNISIM;
use UNISIM.VCOMPONENTS.ALL;
--pragma translate_on

entity DDR_3state is
  Port(
    clk : in std_logic; --clk and clk180 can be outputs from the DCM or
clk180 can be the
    clk180 : in std_logic; --logical inverse of clk (the inverter is
located in the IOB and will be inferred.
    d0 : in std_logic; --data in to fddr
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 249/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 249 of 947

```
   d1 : in std_logic; --data in to fddr
   ce : in std_logic; --clock enable
   set : in std_logic; --set
   rst : in std_logic; --reset
   en0 : in std_logic; --enable signal
   en1 : in std_logic; --enable signal
   data_out : out std_logic --data seen at pad
  );

end DDR_3state;

architecture behavioral of DDR_3state is

signal ddr_out, tri : std_logic;

component FDDRRSE
   port  (
   Q   : out std_logic;
   D0  : in std_logic;
   D1  : in std_logic;
   C0  : in std_logic;
   C1  : in std_logic;
   CE  : in std_logic;
   R   : in std_logic;
   S   : in std_logic
        );
end component;


begin

--Instantiate Ouput DDR registers
U0: FDDRRSE port map(Q  => tri,
       D0 => en0,
       D1 => en1,
       C0 => clk,
       C1 => clk180,
       CE => ce,
       R  => rst,
       S  => set
      );

--Instantiate three-state DDR registers
U1: FDDRRSE port map(   Q  => ddr_out,
       D0 => d0,
       D1 => d1,
       C0 => clk,
       C1 => clk180,
       CE => ce,
       R  => rst,
       S  => set
      );

--inferr the 3-State buffer
process(tri, ddr_out)
begin
  if tri = '1' then
     data_out <= 'Z';
  elsif tri = '0' then
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 250 of 947

```
      data_out <= ddr_out;
  end if;
end process;

end behavioral;
```

DDR_3state.v

```
module DDR_3state (d0 , d1, data_out, en_0, en_1, clk, clk180, rst, set,
ce);

input d0, d1, clk, clk180, rst, set, ce, en_0, en_1;

output data_out;
reg data_out;

wire q, q_tri;

//Synchronous Output DDR primitive instantiation

FDDRRSE U1  ( .D0(d0),
              .D1(d1),
              .C0(clk),
              .C1(clk180),
              .CE(ce),
              .R(rst),
              .S(set),
              .Q(q)
            );

//Synchronous 3-State DDR primitive instantiation

FDDRRSE U2  ( .D0(en_0),
              .D1(en_1),
              .C0(clk),
              .C1(clk180),
              .CE(ce),
              .R(rst),
              .S(set),
              .Q(q_tri)
            );

//3-State buffer description

always @ (q_tri or q)
  begin
  if (q_tri)
    data_out = 1'bz;
  else
    data_out = q;
  end

endmodule
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 251/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 251 of 947

LVDS I/O

Introduction

Low Voltage Differential Signaling (LVDS) is a very popular and powerful high-speed interface in many system applications. Virtex-II Pro I/Os are designed to comply with the EIA/TIA electrical specifications for LVDS to make system and board design easier. With the addition of an LVDS current-mode driver in the IOBs, which eliminates the need for external source termination in point-to-point applications, and with the choice of an extended mode, Virtex-II Pro devices provide the most flexible solution for doing an LVDS design in an FPGA.

Table 3-59 lists all LVDS primitives that are available for Virtex-II Pro devices.

Table 3-59: **Available Virtex-II Pro LVDS Primitives**

Input	Output	3-State	Clock	Bi-Directional
IBUFDS	OBUFDS	OBUFTDS	IBUFGDS	IOBUFDS
IBUFDS_LVDS_25	OBUFDS_LVDS_25	OBUFTDS_LVDS_25	IBUFGDS_LVDS_25	
IBUFDS_LVDSEXT_25	OBUFDS_LVDSEXT_25	OBUFTDS_LVDSEXT_25	IBUFGDS_LVDSEXT_25	
IBUFDS_LVDS_25_DCI			IBUFGDS_LVDS_25_DCI	
IBUFDS_LVDSEXT_25_DCI			IBUFGDS_LVDSEXT_25_DCI	
IBUFDS_BLVDS_25	OBUFDS_BLVDS_25	OBUFTDS_BLVDS_25		IOBUFDS_BLVDS_25
IBUFDS_LDT_25	OBUFDS_LDT_25	OBUFTDS_LDT_25		
IBUFDS_LVPECL_25	OBUFDS_LVPECL_25	OBUFTDS_LVPECL_25		
IBUFDS_ULVDS_25	OBUFDS_ULVDS_25	OBUFTDS_ULVDS_25		
IBUFDS_LDT_25_DT			IBUFGDS_LDT_25_DT	
IBUFDS_LVDSEXT_25_DT			IBUFGDS_LVDSEXT_25_DT	
IBUFDS_LVDS_25_DT			IBUFGDS_LVDS_25_DT	
IBUFDS_ULVDS_25_DT			IBUFGDS_ULVDS_25_DT	

DS_LVDSEXT = Extended mode LVDS buffer

This buffer provides a higher drive capability and voltage swing (350 - 750 mV), which makes it ideal for long-distance or cable LVDS links. The output AC characteristics of this LVDS Extended Mode driver are not within the EIA/TIA specifications. This LVDS Extended Mode driver is intended for situations that require higher drive capabilities in order to produce an LVDS signal that is within EIA/TIA specification at the receiver.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 252 of 947

Creating an LVDS Input/Clock Buffer

Figure 3-119 illustrates the LVDS input and clock buffer primitives shown in Table 3-60. The pin names used are the same as those used in the HDL library primitives.

Table 3-60: **LVDS Input and Clock Buffer Primitives**

LVDS Inputs	LVDS Clocks
IBUFDS	IBUFGDS
IBUFDS_LVDS_25	IBUFGDS_LVDS_25
IBUFDS_LVDSEXT_25	IBUFGDS_LVDSEXT_25
IBUFDS_LVDS_25_DCI	IBUFGDS_LVDS_25_DCI
IBUFDS_LVDSEXT_25_DCI	IBUFGDS_LVDSEXT_25_DCI
IBUFDS_BLVDS_25	
IBUFDS_LDT_25	
IBUFDS_LVPECL_25	
IBUFDS_ULVDS_25	
IBUFDS_LDT_25_DT	IBUFGDS_LDT_25_DT
IBUFDS_LVDSEXT_25_DT	IBUFGDS_LVDSEXT_25_DT
IBUFDS_LVDS_25_DT	IBUFGDS_LVDS_25_DT
IBUFDS_ULVDS_25_DT	IBUFGDS_ULVDS_25_DT




Figure 3-119: **LVDS Input and Clock Primitives**

To create an LVDS input, instantiate the desired mode (2.5V or Extended) LVDS input buffer. Notice that the P and N channels are included in the primitive (I = P, IB = N). Software automatically uses the appropriate pin from an adjacent IOB for the N channel. The same applies to LVDS clocks: Use IBUFGDS_LVDS*

LVDS Input HDL Examples

VHDL Instantiation

```
U1: IBUFDS_LVDS_25
  port map  (
              I => data_in_P,
              IB => data_in_N
              O => data_in
            );
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 253 of 947

Verilog Instantiation

```
IBUFDS_LVDS_25   U1   ( .I(data_in_P),
                        .IB(data_in_N),
                        .O(data_in)
                      );
```

Port Signals

I = P-channel data input to the LVDS input buffer

IB = N-channel data input to the LVDS input buffer

O = Non-differential input data from LVDS input buffer

Location Constraints

```
NET "data_in_P" LOC= "<pin_location>";
```

LVDS Receiver Termination

Virtex-II Pro provides a true 100Ω differential termination (DT) across the input differential receiver terminals. The LVDS_25_DT, LVDSEXT_25_DT, LDT_25_DT, and ULVDS_25_DT standards support on-chip differential termination.

The on-chip input differential termination in Virtex-II Pro provides major advantages over the external resistor or the DCI termination solution:

- Eliminates the stub at the receiver completely and therefore greatly improve signal integrity
- Consumes less power than DCI termination
- Supports LDT (not supported by DCI termination)
- Frees up VRP/VRN pins

Figure 3-120 is an example of a typical termination for an LVDS receiver on a board with 50Ω transmission lines.

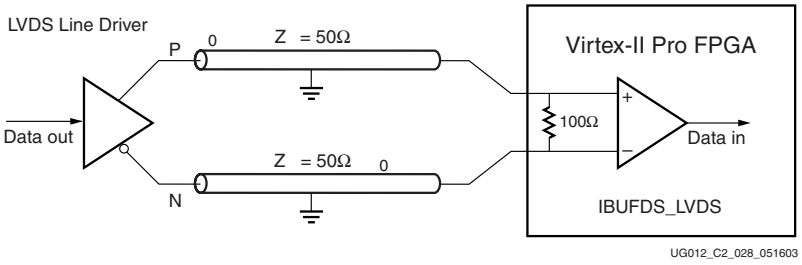


Figure 3-120: **LVDS Receiver Termination**

Differential Termination LVDS Input HDL Examples

VHDL Instantiation

```
U1: IBUFDS_LVDS_25_DT
port map (
I => data_in_P,
IB => data_in_N
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 254 of 947

```
O => data_in
);
```

Verilog Instantiation

```
IBUFDS_LVDS_25_DT U1 (
.I(data_in_P),
.IB(data_in_N),
.O(data_in)
);
```

Creating an LVDS Output Buffer

Figure 3-121 illustrates the LVDS output buffer primitives:

- OBUFDS_LVDS_25
- OBUFDS_LVDSEXT_25

The pin names used are the same as those used in the HDL library primitives.




Figure 3-121: **LVDS Output Buffer Primitives**

To create an LVDS output, instantiate the desired mode (2.5 or Extended) LVDS output buffer. Notice that the P and N channels are included in the primitive (O = P, OB = N). Software automatically uses the appropriate pin from an adjacent IOB for the N channel.

LVDS Output HDL Examples

VHDL Instantiation

```
U1: OBUFDS_LVDS_25
  port map  (
              I => data_out,
              O => data_out_P,
              OB => data_out_N
            );
```

Verilog Instantiation

```
OBUFDS_LVDS_25 U1  ( .I(data_out),
                     .O(data_out_P),
                     .OB(data_out_N)
                   );
```

Port Signals

`I` = data input to the LVDS input buffer

`O` = P-channel data output

`OB` = N-channel data output

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 255 of 947

Location Constraints

```
NET "data_out_P" LOC= "<pin_location>";
```

LVDS Transmitter Termination

The Virtex-II Pro LVDS transmitter does not require any termination. Table 3-59, page 248 lists primitives that correspond to the Virtex-II Pro LVDS current-mode drivers. Virtex-II Pro LVDS current-mode drivers are a true current source and produce the proper (EIA/TIA compliant) LVDS signal. Figure 3-122 illustrates a Virtex-II Pro LVDS transmitter on a board with 50Ω transmission lines.

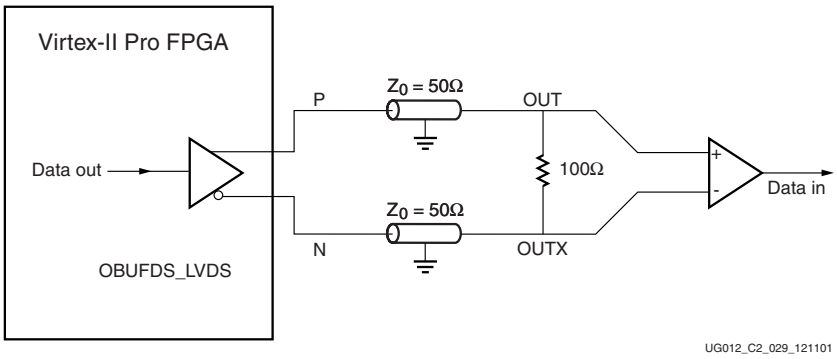


Figure 3-122: **LVDS Transmitter Termination**

Creating an LVDS Output 3-State Buffer

Figure 3-123 illustrates the LVDS 3-state buffer primitives:

- OBUFTDS_LVDS_25
- OBUFTDS_LVDSEXT_25

The pin names used are the same as those used in the HDL library primitives.




Figure 3-123: **LVDS 3-State Primitives**

To create an LVDS 3-State output, instantiate the desired mode (2.5V or Extended) LVDS 3-state buffer. Notice that the P and N channels are included in the primitive (O = P, OB = N). Software automatically uses the appropriate pin from an adjacent IOB for the N channel.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 256 of 947

LVDS 3-State HDL Example

VHDL Instantiation

```
U1: OBUFTDS_LVDS_25
  port map  (
              I => data_out,
              T => tri,
              O => data_out_P,
              OB => data_out_N
            );
```

Verilog Instantiation

```
OBUFTDS_LVDS_25  U1  (  .I(data_out),
                        .T(tri),
                        .O(data_out_P),
                        .OB(data_out_N)
                     );
```

Port Signals

`I` = data input to the 3-state output buffer

`T` = 3-State control signal

`O` = P-channel data output

`OB` = N-channel data output

Location Constraints

```
NET "data_out_P" LOC = "<pin_location>";
```

LVDS 3-State Termination

The Virtex-II Pro LVDS 3-state buffer does not require any termination. Table 3-59, page 248 lists primitives that correspond to Virtex-II Pro LVDS current-mode drivers. These drivers are a true current source, and they produce the proper (EIA/TIA compliant) LVDS signal. Figure 3-124 illustrates a simple redundant point-to-point LVDS solution with two LVDS 3-state transmitters sharing a bus with one LVDS receiver and the required termination for the circuit.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 257 of 947

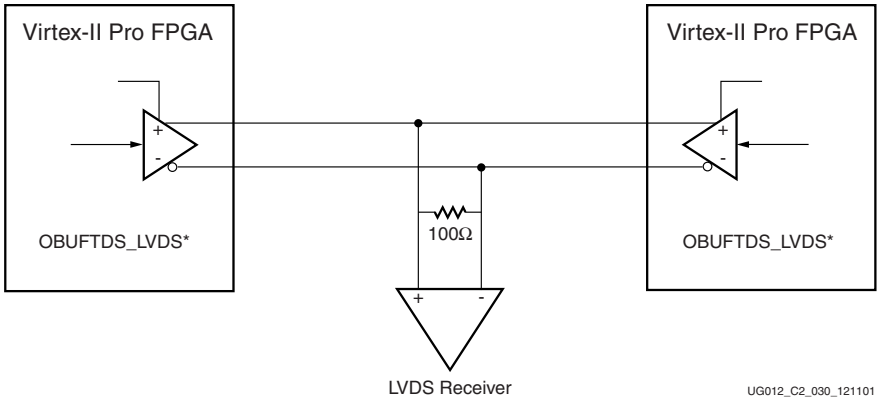


Figure 3-124: **LVDS 3-State Termination**

Creating a Bidirectional LVDS Buffer

Since LVDS is intended for point-to-point applications, BLVDS (Bus-LVDS) is not an EIA/TIA standard implementation and requires careful adaptation of I/O and PCB layout design rules. The primitive supplied in the software library for bi-directional LVDS does not use the Virtex-II Pro LVDS current-mode driver. Therefore, source termination is required. Refer to XAPP243 for examples of BLVDS termination.

The following are VHDL and Verilog instantiation examples of Virtex-II Pro BLVDS primitives.

VHDL Instantiation

```
blvds_io: IOBUFDS_BLVDS_25
port map  (
           I => data_out,
           O => data_in,
           T => tri,
           IO => data_IO_P,
           IOB => data_IO_N
          );
```

Verilog Instantiation

```
IOBUFDS_BLVDS_25  blvds_io   (  .I(data_out),
                                .O(data_in),
                                .T(tri),
                                .IO(data_IO_P),
                                .IOB(data_IO_N)
                             );
```

Port Signals

`I` = data output: internal logic to LVDS I/O buffer

`T` = 3-State control to LVDS I/O buffer

`IO` = P-channel data I/O to or from BLVDS pins

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 258 of 947

IOB = N-channel data I/O to or from BLVDS pins

O = Data input: off-chip data to LVDS I/O buffer

Location Constraints

Only the P or N channel must be constrained. Software automatically places the corresponding channel of the pair on the appropriate pin.

LDT

Lightning Data Transport (LDT) is a high speed interface and protocol introduced by Advanced Micro Devices. LDT is a differential signaling based interface that is very similar to LVDS. Virtex-II Pro IOBs are equipped with LDT buffers. These buffers also have corresponding software primitives as follows:

IBUFDS_LDT_25

IBUFGDS_LDT_25

OBUFDS_LDT_25

OBUFTDS_LDT_25

LDT Implementation

LDT implementation is the same as LVDS with DDR, so follow all of the rules and guidelines set forth earlier in this chapter for LVDS-DDR, and replace the LVDS buffer with the corresponding LDT buffer. For more information on Virtex-II Pro LDT electrical specification, refer to the Virtex-II Pro Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 259 of 947

LVPECL I/O

Introduction

Low Voltage Positive Emitter-Coupled Logic (LVPECL) is a very popular and powerful high-speed interface in many system applications. Virtex-II Pro I/Os are designed to comply with the EIA/TIA electrical specifications for 2.5V LVPECL to make system and board design easier.

Table 3-61 lists all LVPECL primitives that are available for Virtex-II Pro devices.

Table 3-61: **Available Virtex-II Pro LVPECL Primitives**

Input	Output	3-State	Clock	Bi-Directional
IBUFDS_LVPECL_25	OBUFDS_LVPECL_25	OBUFTDS_LVPECL_25	IBUFGDS_LVPECL_25	

Creating an LVPECL Input/Clock Buffer

Figure 3-125 illustrates the LVPECL input and clock buffer primitives shown in Table 3-62. The pin names used are the same as those used in the HDL library primitives.

Table 3-62: **LVPECL Input and Clock Buffer Primitives**

LVPECL Inputs	LVPECL Clocks
IBUFDS_LVPECL_25	IBUFGDS_LVPECL_25




Figure 3-125: **LVPECL Input and Clock Primitives**

To create an LVPECL input, instantiate the 2.5V LVPECL input buffer. Notice that the P and N channels are included in the primitive (I = P, IB = N). Software automatically uses the appropriate pin from an adjacent IOB for the N channel. The same applies to LVPECL clocks: Use IBUFGDS_LVPECL*.

LVPECL Input HDL Examples

VHDL Instantiation

```
U1: IBUFDS_LVPECL_25
  port map  (
             I => data_in_P,
             IB => data_in_N
             O => data_in
            );
```

Verilog Instantiation

```
IBUFDS_LVPECL_25 U1    ( .I(data_in_P),
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 260 of 947

```
    .IB(data_in_N),
    .O(data_in)
);
```

Port Signals

I = P-channel data input to the LVPECL input buffer

IB = N-channel data input to the LVPECL input buffer

O = Non-differential input data from LVPECL input buffer

Location Constraints

```
NET "data_in_P" LOC= "<pin_location>";
```

LVPECL Receiver Termination

All LVPECL receivers require standard termination. Figure 3-126 is an example of a typical termination for an LVPECL receiver on a board with 50Ω transmission lines.

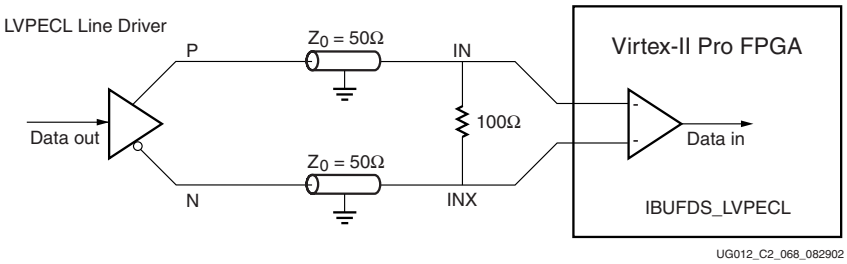


Figure 3-126: **LVPECL Receiver Termination**

Creating an LVPECL Output Buffer

Figure 3-127 illustrates the LVDS output buffer primitives:

- OBUFDS_LVPECL_25
- OBUFTDS_LVPECL_25

The pin names used are the same as those used in the HDL library primitives.




Figure 3-127: **LVPECL Output Buffer Primitives**

To create an LVPECL output, instantiate the desired mode LVPECL output buffer. Notice that the P and N channels are included in the primitive (O = P, OB = N). Software automatically uses the appropriate pin from an adjacent IOB for the N channel.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 261 of 947

LVPECL Output HDL Examples

VHDL Instantiation

```
U1: OBUFDS_LVPECL_25
  port map  (
              I => data_out,
              O => data_out_P,
              OB => data_out_N
            );
```

Verilog Instantiation

```
OBUFDS_LVPECL_25U1 ( .I(data_out),
                     .O(data_out_P),
                     .OB(data_out_N)
                   );
```

Port Signals

`I` = data input to the LVPECL input buffer

`O` = P-channel data output

`OB` = N-channel data output

Location Constraints

```
NET "data_out_P" LOC= "<pin_location>";
```

LVPECL Transmitter Termination

The Virtex-II LVPECL transmitter requires the termination shown in Figure 3-128, which illustrates a Virtex-II LVPECL transmitter on a board with 50Ω transmission lines. Table 3-61 lists primitives that correspond to the Virtex-II LVPECL drivers.

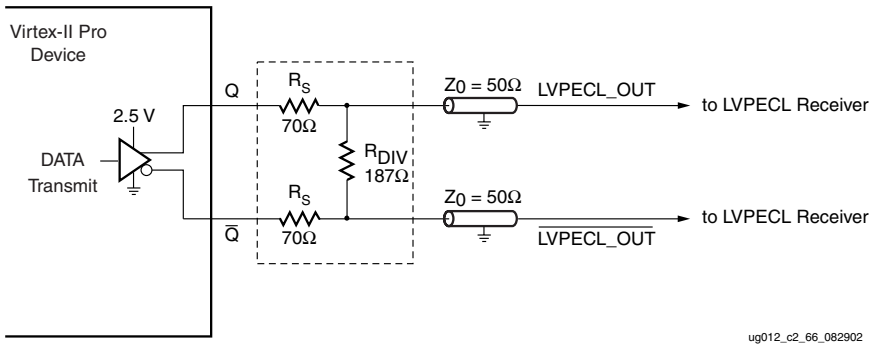


Figure 3-128: **LVPECL Transmitter Termination**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 262 of 947

Bitstream Encryption

Virtex-II Pro devices have an on-chip decryptor that can be enabled to make the configuration bitstream (and thus the whole logic design) secure. The user can encrypt the bitstream in the Xilinx software, and the Virtex-II Pro chip then performs the reverse operation, decrypting the incoming bitstream, and internally recreating the intended configuration.

This method provides a very high degree of design security. Without knowledge of the encryption/decryption key or keys, potential pirates cannot use the externally intercepted bitstream to analyze, or even to clone the design. System manufacturers can be sure that their Virtex-II Pro implemented designs cannot be copied and reverse engineered. Also, IP Virtex-II Pro chips that contain the correct decryption key.

The Virtex-II Pro devices store the internal decryption keys in a few hundred bits of dedicated RAM, backed up by a small externally connected battery. At <100 nA load, the endurance of the battery is only limited by its shelf life.

The method used to encrypt the data is Data Encryption Standard (DES). This is an official standard supported by the National Institute of Standards and Technology (NIST) and the U. S. Department of Commerce. DES is a symmetric encryption standard that utilizes a 56-bit key. Because of the increased sophistication and speed of today's computing hardware, single DES is no longer considered to be secure. However, the Triple Data Encryption Algorithm (TDEA), otherwise known as triple DES, is authorized for use by U. S. federal organizations to protect sensitive data and is used by many financial institutions to protect their transactions. Triple DES has yet to be cracked. Both DES and triple DES are available in Virtex-II Pro devices.

What DES Is

DES and triple DES are symmetric encryption algorithms. This means that the key to encrypt and the key to decrypt are the same. The security of the data is kept by keeping the key secret. This contrasts to a public key system, like RSA or PGP. One thing to note is that Virtex-II Pro devices use DES in Cipher Block Chaining mode. This means that each block is combined with the previous encrypted block for added security. DES uses a single 56-bit key to encrypt 64-bit blocks one at a time.

How Triple DES is Different

Triple DES uses three keys (known as a key bundle or key set), and the encryption algorithm is repeated for each of those keys. If $E_K(I)$ and $D_K(I)$ denote the encryption and decryption of a data block I using key K, the Triple DES encryption algorithm is as follows (known as E-D-E):

$$Output_{encrypted} = E_{K3}(D_{K2}(E_{K1}(I)))$$

And the decryption algorithm is as follows (known as D-E-D):

$$Output_{decrypted} = D_{K1}(E_{K2}(D_{K3}(I)))$$

$K_1 = K_2 = K_3$ gives the same result as single DES.

For a detailed description of the DES standard, refer to:

http://www.itl.nist.gov/fipspubs/fip46-2.htm

For a popular description of the origin and the basic concept of DES and many other older and newer encryption schemes, see the recent best-seller:

The Code Book by Simon Singh, Doubleday 1999, ISBN 0-385-49531-5

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 263 of 947

Classification and Export Considerations

Virtex-II Pro FPGAs have been classified by the U. S. Department of Commerce as an FPLD (3A001.a.7), which is the same classification as current FPGAs. Only the decryptor is on-chip and can only be used to decrypt an incoming bitstream, so the classification has not changed and no new paperwork is required. The software has been classified under ECCN#:5D002 and can be exported globally under license exception ENC. No changes to current export practices are necessary.

Creating Keys

For Virtex-II Pro, DES or triple DES (TDEA) can be used. DES uses a single 56-bit key, where triple-DES always uses three such keys. All of the keys can be chosen by the BitGen program at random, or can be explicitly specified by the user.

Virtex-II Pro devices can have six separate keys programmed into the device. A particular Virtex-II Pro device can store two sets of triple-DES keys and can thus accept alternate bitstreams from two competing IP vendors, without providing access to each other's design. However, all of the keys must be programmed at once.

An encrypted bitstream is created by the BitGen program. Keys and key options can be chosen in two ways: by command-line arguments to BitGen, or by specifying a KeyFile (with the –g KeyFile command-line option). The BitGen options relevant to encryption are listed in Table 3-63.

Table 3-63: **BitGen Encryption Options**

Option	Description	Values (default first where appropriate)
Encrypt	Whether to encrypt the bitstream	No, Yes
Key0	DES Key 0	pick, <*hex string*>
Key1	DES Key 1	pick, <*hex string*>
Key2	DES Key 2	pick, <*hex string*>
Key3	DES Key 3	pick, <*hex string*>
Key4	DES Key 4	pick, <*hex string*>
Key5	DES Key 5	pick, <*hex string*>
KeyFile	Location of separate key definition file	<*string*>
Keyseq0	Set the key sequence for key 0 (S = single, F = first, M = middle, L = last)	S,F,M,L
Keyseq1	Set the key sequence for key 1	S,F,M,L
Keyseq2	Set the key sequence for key 2	S,F,M,L
Keyseq3	Set the key sequence for key 3	S,F,M,L
Keyseq4	Set the key sequence for key 4	S,F,M,L
Keyseq5	Set the key sequence for key 5	S,F,M,L
StartKey	Key number to start decryption	0,3
StartCBC	Constant Block Chaining start value	pick, <*string*>

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 264/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 264 of 947

The key sequence (Keyseq) is set to S for single key encryption, F for first key in multi-key encryption, M for middle key in multi-key encryption, and L for last key in multi-key encryption. When the KeyFile option is specified, BitGen looks in that file for all other DES key options listed above. An example for the input KeyFile using triple DES is:

```
# Comment for key file
Key 0 0x9ac28ebeb2d83b;
Key 1 pick;
Key 2 string for my key;
Key 3 0x00000000000000;
Key 4 8774eb3ebb4f84;
Keyseq 0 F;
Keyseq 1 M;
Keyseq 2 L;
Keyseq 3 F;
Keyseq 4 M;
Keyseq 5 L;
Key StartCBC 503f2f655b1b2f82;
StartKey 0;
```

Every key is given in the output key file, with unused key locations set to "0x0000000000000000." The proper key sequence prefix is added for all used keys. The prefix is preserved for unused keys, if the user specified a value. The output key file has the same base file name as the **.bit** file, but with a **.nky** file extension.

The command line equivalent of the input key file above is as follows:

```
bitgen -g security:level1 -g Encrypt:Yes -g Key0: 0x9ac28ebeb2d83b -g
Key1:pick -g Key2:- string for my key- -g Key30x00000000000000 -g
Key4:8774eb3ebb4f84 -g Keyseq0:F, -g Keyseq1:M, -gKeyseq2:L -g
Keyseq3:F -g Keyseq4:M -g Keyseq5:L -g StartCBC:503f2f655b1b2f82 -g
StartKey:0 myinput.ncd
```

If the key file is used, the command line is as follows:

```
Bitgen -g security:level1 -g Encrypt:Yes -g KeyFile:mykeyfile
myinput.ncd
```

The output key file from either of the above inputs looks something like this:

```
Device 2VP4FG456;
Key 0 0x9ac28ebeb2d83b;
Key 1 0xdb1adb5f08b972;
Key 2 0x5452032773c286;
Key 3 0x00000000000000;
Key 4 0x8774eb3ebb4f84;
Key 5 0x00000000000000;
Keyseq 0 F;
Keyseq 1 M;
Keyseq 2 L;
Keyseq 3 F;
Keyseq 4 M;
Keyseq 5 L;
Key StartCBC 0x503f2f655b1b2f82;
StartKey 0;
```

In the case of the string for Key2, if the keyvalue is a character string, BitGen encodes the string into a 56-bit hex string. The same character string gives the same 56-bit hex string every time. This enables passwords or phrases to be used instead of hex strings.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 265 of 947

The above keys are all specified as 64 bits each. The first 8 bits are used by Xilinx as header information and the following 56 bits as the key. BitGen accepts 64 bit keys, but automatically overrides the header, if necessary.

Because of security issues, the **–g** Compress option cannot be used with bitstream encryption. Also, partial reconfiguration is not allowed.

Loading Keys

DES keys can only be loaded through JTAG. The iMPACT™ tools have the capability to take a .nky file and program the device with the keys. In order to program the keys, a "key-access mode" is entered. When this mode is entered, all of the FPGA memory, including the keys and configuration data, is cleared. Once the keys are programmed, they cannot be reprogrammed without clearing the entire device. This "key access mode" is completely transparent to most users.

Keys are programmed using the ISC_PROGRAM instruction, as detailed in the JTAG 1532 specification. SVF generation is also supported, if keys are to be programmed using a different method, such as a microprocessor or JTAG test software.

Loading Encrypted Bitstreams

Once the device has been programmed with the correct keys, the device can be configured with an encrypted bitstream. Non-encrypted bitstreams may also be used to configure the device, and the stored keys are ignored. The method of configuration is not at all affected by encryption. Any of the modes may be used, and the signaling does not change (see Chapter 4, "Configuration"). However, *all* bitstreams must configure the entire device, since partial reconfiguration is not permitted.

Once the device has been configured with an encrypted bitstream, it cannot be reconfigured without toggling the PROG pin, cycling power, or performing the JTAG JSTART instruction. All of these events fully clear the configuration memory, but none of these events reset the keys as long as V_{BATT} or V_{CCAUX} are maintained.

V_{BATT}

V_{BATT} is a separate battery voltage to allow the keys to remain programmed in the Virtex-II Pro device. V_{BATT} draws very little current (on the order of nA) to keep the keys programmed. A small watch battery is suitable (refer to V_{BATT} DC Characteristics in the Virtex-II Pro Data Sheet and the battery's specifications to estimate its lifetime).

While the auxiliary voltage (V_{CCAUX}) is applied, V_{BATT} does not draw any current, and the battery can be removed or exchanged.

CORE Generator System

Introduction

This section on the Xilinx CORE Generator™ System and the Xilinx Intellectual Property (IP) Core offerings is provided as an overview of products that facilitate the Virtex-II Pro design process. For more detailed and complete information, consult the *CORE Generator Guide*, which can be accessed online in the Xilinx software installation, as well as at the http://toolbox.xilinx.com/docsan/xilinx4/manuals.htm site under the "Design Entry Tools" heading.


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 266/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 266 of 947

The CORE Generator System

The Xilinx CORE Generator System is the cataloging, customization, and delivery vehicle for IP cores targeted to Xilinx FPGAs. This tool is included with all Xilinx ISE BaseX, ISE Foundation, and ISE Alliance Series software packages. The CORE Generator provides centralized access to a catalog of ready-made IP functions ranging in complexity from simple arithmetic operators, such as adders, accumulators, and multipliers, to system-level building blocks, such as filters, transforms, and memories. Cores can be displayed alphabetically, by function, by vendor, or by type. Each core comes with its own data sheet, which documents the core's functionality in detail.

The CORE Generator User Interface (see Figure 3-129) has direct links to key Xilinx web support pages, such as the Xilinx IP Center website (www.xilinx.com/ipcenter) and Xilinx Technical Support, making it very easy to access the latest Virtex-II Pro IP releases and get helpful, up-to-date specifications and information on technical issues. Links to partner IP providers are also built into the informational GUIs for the various partner-supplied AllianceCORE products described under "AllianceCORE Program," page 268.

The use of CORE Generator IP cores in Virtex-II Pro designs enables designers to shorten design time, and it also helps them realize high levels of performance and area efficiency without any special knowledge of the Virtex-II Pro architecture. The IP cores achieve these high levels of performance and logic density by using Xilinx Smart-IP™ technology.

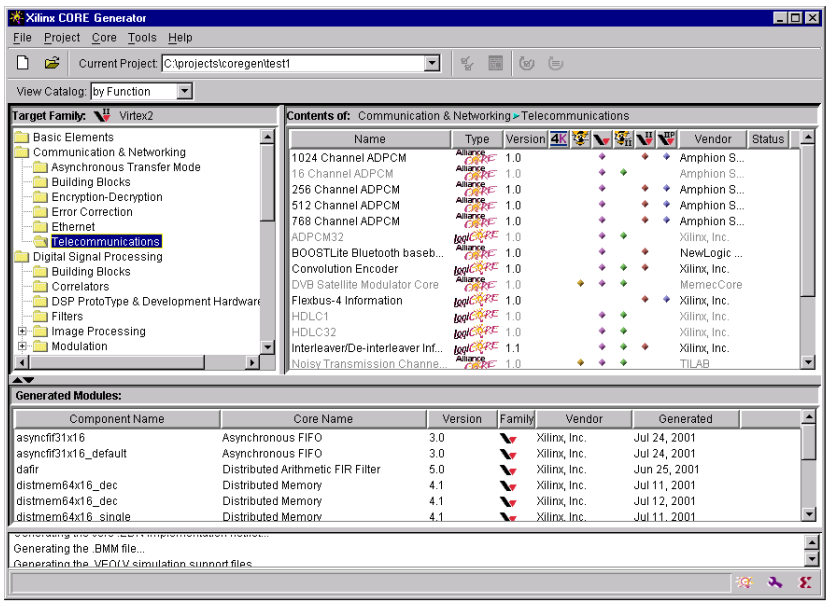

ug002_c2_068b_100901

Figure 3-129: **Core Generator User Interface**

Smart-IP Technology

Smart-IP technology leverages Xilinx FPGA architectural features, such as look-up tables (LUTs), distributed RAM, segmented routing and floorplanning information, as well as relative location constraints and expert logic mapping to optimize the performance of every core instance in a given Xilinx FPGA design. In the context of Virtex-II Pro cores, Smart-IP technology includes the use of the special high-performance Virtex-II Pro

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 267 of 947

architectural features, such as embedded 18x18 multipliers, block memory, shift register look-up tables (SRL16's), and special wide mux elements.

Smart-IP technology delivers:

- Physical layouts optimized for high performance
- Predictable high performance and efficient resource utilization
- Reduced power requirements through compact design and interconnect minimization
- Performance independent of device size
- Ability to use multiple cores without deterioration of performance
- Reduced compile time over competing architectures

CORE Generator Design Flow

A block diagram of the CORE Generator design flow is shown in Figure 3-130.

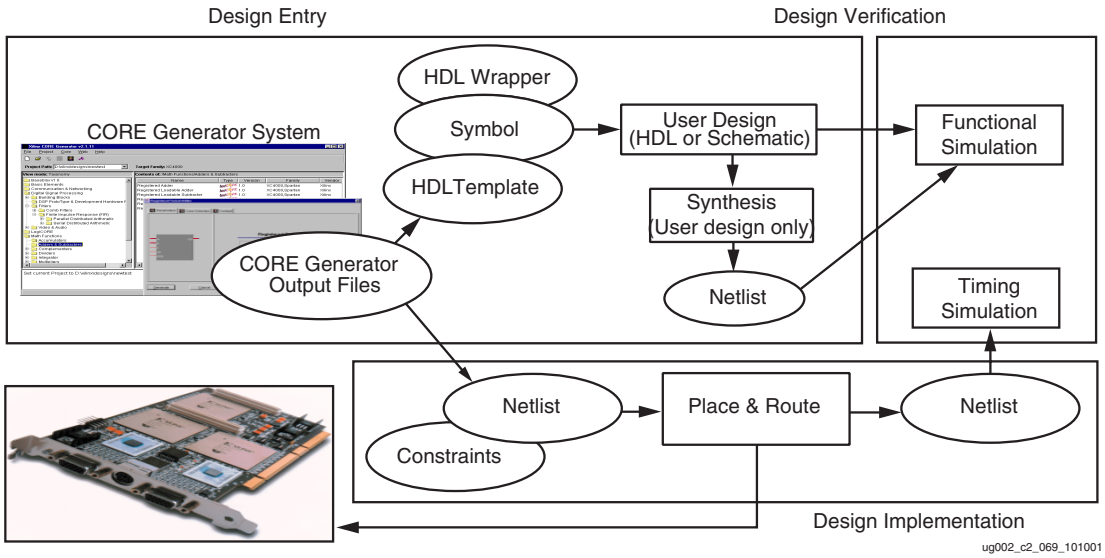


Figure 3-130: **CORE Generator Design Flow**

Notes:

1. The outputs produced by the CORE Generator consist of an implementation Netlist and optional schematic symbol, HDL template files, and HDL simulation model wrapper files.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 268 of 947

Core Types

Parameterized Cores

The CORE Generator System supplies a wide assortment of parameterized IP cores that can be customized to meet specific Virtex-II Pro design needs and size constraints. See Figure 3-131. For each parameterized core, the CORE Generator System supplies:

- A customized EDIF implementation netlist (.EDN)
- A parameterized Verilog or VHDL behavioral simulation model (.V, .VHD) and corresponding wrapper file (also .V, .VHD)
- Verilog or VHDL templates (.VEO, .VHO)
- An ISE Foundation or Viewlogic® schematic symbol

The EDIF implementation netlist is used by the Xilinx tools to implement the core. The other design files generated depend on the Design Entry settings specified (target CAE vendor, and design flow type -- schematic or HDL). Schematic symbol files are generated when a schematic design flow is specified for the project.

Parameterized HDL simulation models are provided in two separate HDL simulation libraries, one for Verilog functional simulation support, and the other for VHDL functional simulation support. The libraries, which are included as part of the Xilinx installation, are in the following locations:

$XILINX/verilog/src/XilinxCoreLib

$XILINX/vhdl/src/XilinxCoreLib

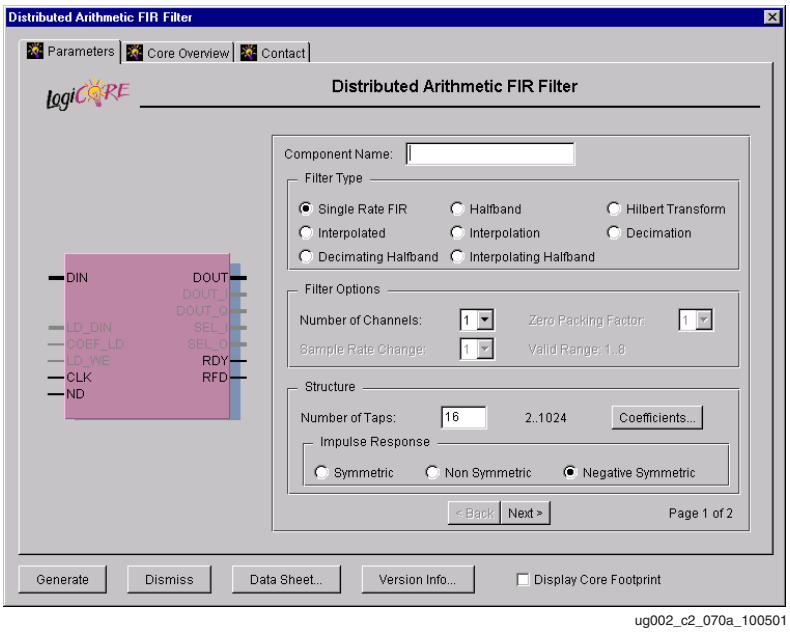


Figure 3-131: **Core Customization Window for a Parameterized Core**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 269/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 269 of 947

If using a compiled simulator, these libraries must be precompiled before performing a functional simulation of the cores. An analyze_order file describing the required compile order of these models is included with each XilinxCoreLib library, one for Verilog (verilog_analyze_order) and one for VHDL (vhdl_analyze_order).

For an HDL design flow, Verilog and VHDL templates (.VEO and .VHO files) are also provided to facilitate the integration of the core into the design for the purposes of functional simulation, synthesis, and implementation. The Verilog (.V) and VHDL (.VHD) wrapper files are also generated. The wrapper files for a particular core are compiled like normal simulation models. They convey custom parameter values to the corresponding generic, parameterized behavioral model for that core in the XilinxCoreLib library. The custom parameter values are used to tailor the behavior of the customized core.

The following is a sample VHO template:

```
component adder8
    port (
    a: IN std_logic_VECTOR(7 downto 0);
    b: IN std_logic_VECTOR(7 downto 0);
    c: IN std_logic;
    ce: IN std_logic;
    ci: IN std_logic;
    clr: IN std_logic;
    s: OUT std_logic_VECTOR(8 downto 0));
end component;

-- Synplicity black box declaration
attribute black_box : boolean;
attribute black_box of test: component is true;

-- COMP_TAG_END ------ End COMPONENT Declaration ------------

-- The following code must appear in the VHDL architecture
-- body. Substitute your own instance name and net names.

------------- Begin Cut here for INSTANTIATION Template ----- INST_TAG
your_instance_name : adder8
    port map (
    a => a,
    b => b,
    c => c,
    ce => ce,
    ci => ci,
    clr => clr,
    s => s);

-- INST_TAG_END ------ End INSTANTIATION Template ------------
-- You must compile the wrapper file test.vhd when simulating
-- the core, test. When compiling the wrapper file, be sure to
-- reference the XilinxCoreLib VHDL simulation library. For detailed
-- instructions, please refer to the "Core Generator Guide".
```

Fixed Netlist Cores

The other type of Virtex-II Pro core provided by the CORE Generator is the fixed netlist core. These are preset, non-parameterized designs that are shipped with the following:

- A fixed EDIF implementation netlist (as opposed to one that is customized on the fly)
- .VEO and .VHO templates

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 270 of 947

- Non-parameterized .V and .VHD behavioral simulation models
- Schematic symbol support

Examples include the fixed netlist Xilinx FFTs and most AllianceCORE products.

Since the HDL behavioral models for fixed netlist cores are not parameterized, the corresponding .VEO and .VHO template files are correspondingly simple. They do not need to pass customizing parameter values to a library behavioral model.

Xilinx IP Solutions and the IP Center

The CORE Generator works in conjunction with the Xilinx IP Center on the world wide web to provide the latest IP and software upgrades. To make the most of this resource, Xilinx highly recommends that whenever starting a design, first do a quick search of the Xilinx IP Center (www.xilinx.com/ipcenter) to see whether a ready-made core solution is already available.

A complete catalog of Xilinx cores and IP tools resides on the IP Center, including:

- LogiCORE Products
- AllianceCORE Products
- Reference Designs
- XPERTS Partner Consultants
- Design Reuse Tools

When installing the CORE Generator software, the designer gains immediate access to dozens of cores supplied by the LogiCORE Program. In addition, data sheets are available for all AllianceCORE products, and additional, separately licensed, advanced function LogiCORE products are also available. New and updated Virtex-II Pro IP for the CORE Generator can be downloaded from the IP Center and added to the CORE Generator catalog.

LogiCORE Program

LogiCORE products are designed, sold, licensed, and supported by Xilinx. LogiCORE products include a wide selection of generic, parameterized functions, such as muxes, adders, multipliers, and memory cores which are bundled with the Xilinx CORE Generator software at no additional cost to licensed software customers. System-level cores, such as PCI, Reed-Solomon, ADPCM, HDLC, POS-PHY, and Color Space Converters are also available as optional, separately licensed products. Probably, the most common application of the CORE Generator is to use it to quickly generate Virtex-II Pro block and distributed memories. A more detailed listing of available Virtex-II Pro LogiCORE products is available in Table 3-64 and on the Xilinx IP Center website (www.xilinx.com/ipcenter).

Types of IP currently offered by the Xilinx LogiCORE program include:

- Basic Elements: logic gates, registers, multiplexers, adders, multipliers
- Communications and Networking: ADPCM modules, HDLC controllers, ATM building blocks, forward error correction modules, and POS-PHY Interfaces
- DSP and Video Image Processing: cores ranging from small building blocks (e.g., Time Skew Buffers) to larger system-level functions (e.g., FIR Filters and FFTs)
- System Logic: accumulators, adders, subtracters, complementers, multipliers, integrators, pipelined delay elements, single and dual-port distributed and block RAM, ROM, and synchronous and asynchronous FIFOs

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 271/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 271 of 947

- Standard Bus Interfaces: PCI 64/66 (64-bit, 66 MHz), 64/33 (64-bit, 33 MHz), and 32/33 (32-bit, 3 3MHz) Interfaces

AllianceCORE Program

The AllianceCORE program is a cooperative effort between Xilinx and third-party IP developers to provide additional system-level IP cores optimized for Xilinx FPGAs. To ensure a high level of quality, AllianceCORE products are implemented and verified in a Xilinx device as part of the certification process.

Xilinx develops relationships with AllianceCORE partners who can complement the Xilinx LogiCORE product offering. Where Xilinx does not offer a LogiCORE for a particular function, Xilinx partners with an AllianceCORE partner to offer that function. A large percentage of Xilinx AllianceCORE partners focus on data and telecommunication applications, as well as processor and processor peripheral designs.

Together, Xilinx and the AllianceCORE partners are able to provide an extensive library of cores to accelerate the design process. AllianceCORE products include customizable cores which can be configured to exact needs, as well as fixed netlist cores targeted toward specific applications. In many cases, partners can provide cores customized to meet the specific design needs if the primary offerings do not fit the requirements. Additionally, source code versions of the cores are often available from the partners at additional cost for those who need maximum flexibility.

The library of Xilinx and AllianceCORE IP cores allows designers to leverage the expertise of experienced designers who are well-versed in optimizing designs for Virtex-II Pro and other Xilinx architectures. This enables designers to obtain high performance and density in the target Virtex-II Pro device with a faster time to market.

Reference Designs

Xilinx offers two types of reference designs; application notes (XAPPs) developed by Xilinx, and reference designs developed through the Xilinx Reference Design Alliance Program. Both types are extremely valuable to customers looking for guidance when designing systems. Reference designs can often be used as starting points for implementing a broad spectrum of functions in Xilinx programmable logic.

Application notes developed by Xilinx usually include supporting design files. They are supplied free of charge, without technical support or warranty. To see currently available reference designs, visit the www.xilinx.com/products/logicore/refdes.htm website.

Reference designs developed through the Xilinx Reference Design Alliance Program are developed, owned, and controlled by the partners in the program. The goal of the program is to form strategic engineering and marketing partnerships with other semiconductor manufacturers and design houses so as to assist in the development of high quality, multicomponent reference designs that incorporate Xilinx devices and demonstrate how they can operate at the system level with other specialized and general purpose semiconductors.

The reference designs in the Xilinx Reference Design Alliance Program are fully functional and applicable to a wide variety of digital electronic systems, including those used for networking, communications, video imaging, and DSP applications. Visit the www.xilinx.com/company/reference_design/referencepartners.htm website to see a list of designs currently available through this program.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 272 of 947

XPERTS Program

Xilinx established the XPERTS Program to provide customers with access to a worldwide network of certified design consultants proficient with Xilinx Platform FPGAs, software, and IP core integration. All XPERT members are certified and have extensive expertise and experience with Xilinx technology in various vertical applications, such as communications and networking, DSP, video and image processing, system I/O interfaces, and home networking.

XPERTS partners are an integral part of Xilinx strategy to provide customers with cost-efficient design solutions, while accelerating time to market. For more information on Xilinx XPERTS Program, visit the www.xilinx.com/company/consultants/index.htm website.

Design Reuse Tools

To facilitate the archiving and sharing of IP created by different individuals and workgroups within a company, Xilinx offers the IP Capture Tool. The IP Capture Tool helps to package design modules created by individual engineers in a standardized format so that they can be cataloged and distributed using the Xilinx CORE Generator. A core can take the form of synthesizable VHDL or Verilog code, or a fixed function netlist. Once it is packaged by the IP Capture Tool and installed into the CORE Generator, the *"captured"* core can be shared with other designers within a company through an internal network. The IP Capture Tool is supplied as a separate utility through the Xilinx IP Center. For more information, see the www.xilinx.com/ipcenter/designreuse/ipic.htm website.

CORE Generator Summary

The CORE Generator delivers a complete catalog of IP including behavioral models, synthesis templates, and netlists with performance guaranteed by Xilinx Smart-IP technology. It is a repository for LogiCORE products from Xilinx, AllianceCORE products from Xilinx partners, and it supports Design Reuse for internally developed IP. In addition, LogiCORE products are continuously updated to add support for new Xilinx architectures, such as Virtex-II Pro. The most current IP updates are available from the Xilinx IP Center.

Utilizing the CORE Generator library of parameterizable cores, designed by Xilinx for Xilinx FPGAs, the designer can enjoy the advantages of design reuse, including faster time to market and lower cost solutions. For more information, visit the Xilinx IP Center www.xilinx.com/ipcenter website.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 273 of 947

Virtex-II Pro IP Cores Support

Table 3-64 provides a partial listing of cores available for Virtex-II Pro designs. For a complete catalog of Virtex-II Pro IP, visit the Xilinx IP Center www.xilinx.com/ipcenter website.

Table 3-64: **Virtex-II Pro IP Cores Support**

Function	Vendor Name	IP Type	Key Features	Application Examples
Software-Only IP:				
Memory Tests utility	Xilinx	LogiCORE	Used to test Memory Interfaces	
VxWorks Integration / RTOS Adaptation Layer	Xilinx	LogiCORE	Delivered with each peripheral with the Device Driver	
Board Support Package (BSP)	Xilinx	LogiCORE	BSP for the Xilinx development board including PPC405 boot code	
Chip Support Package (CSP)	Xilinx	LogiCORE	Configurable BSP – Delivered through Platform Generator	
Bus Infrastructure:				
OPB Arbiter	Xilinx	LogiCORE	Device driver included	
PLB Arbiter	Xilinx	LogiCORE	Device driver included	
PLB-OPB Bridge	Xilinx	LogiCORE	Device driver included	
OPB-PLB Bridge	Xilinx	LogiCORE	Device driver included	
OPB IPIF Modules:				
IPIF-Slave Attachment	Xilinx	LogiCORE	Device driver included	
IPIF-Master Attachment	Xilinx	LogiCORE	Device driver included	
IPIF-Address Decode	Xilinx	LogiCORE	Device driver included	
IPIF-Interrupt Control	Xilinx	LogiCORE	Device driver included	
IPIF-Read Packet FIFOs	Xilinx	LogiCORE	Device driver included	
IPIF-Write Packet FIFOs	Xilinx	LogiCORE	Device driver included	
IPIF-DMA	Xilinx	LogiCORE	Device driver included	
IPIF-Scatter Gather	Xilinx	LogiCORE	Device driver included	
Memory Interfaces:				
PLB External Memory Controller	Xilinx	LogiCORE	SRAM & FLASH interface including Flash device driver	
OPB External Memory Controller	Xilinx	LogiCORE	SRAM & FLASH interface including Flash device driver	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 274 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Memory Interfaces (continued):				
PLB DDR Controller	Xilinx	LogiCORE	DDR Memory Controller	
OPB BRAM Controller	Xilinx	LogiCORE	OPB BRAM Controller	
OPB ZBT Controller	Xilinx	LogiCORE	ZBT Memory Controller	
Peripherals:				
Interrupt Controller	Xilinx	LogiCORE	Device driver included	
UART-16550	Xilinx	LogiCORE	Device driver included	
UART-16450	Xilinx	LogiCORE	Device driver included	
IIC Master & Slave	Xilinx	LogiCORE	Device driver included	
SPI Master & Slave	Xilinx	LogiCORE	Device driver included	
Ethernet 10/100 MAC	Xilinx	LogiCORE	Device driver included	
ATM Utopia Level 2 Slave	Xilinx	LogiCORE	Device driver included	
TimeBase/Watch Dog Timer	Xilinx	LogiCORE	Device driver included	
Timer/Counter	Xilinx	LogiCORE	Device driver included	
UART - Lite	Xilinx	LogiCORE	Device driver included	
GPIO	Xilinx	LogiCORE	Device driver included	
Basic Elements:				
BUFE-based Multiplexer Slice	Xilinx	LogiCORE	1-256 bits wide	
BUFT-based Multiplexer Slice	Xilinx	LogiCORE	1-256 bits wide	
Binary Counter	Xilinx	LogiCORE	2-256 bits output width	
Binary Decoder	Xilinx	LogiCORE	2-256 bits output width	
Bit Bus Gate	Xilinx	LogiCORE	1-256 bits wide	
Bit Gate	Xilinx	LogiCORE	1-256 bits wide	
Bit Multiplexer	Xilinx	LogiCORE	1-256 bits wide	
Bus Gate	Xilinx	LogiCORE	1-256 bits wide	
Bus Multiplexer	Xilinx	LogiCORE	IO widths up to 256 bits	
Comparator	Xilinx	LogiCORE	1-256 bits wide	
FD-based Parallel Register	Xilinx	LogiCORE	1-256 bits wide	
FD-based Shift Register	Xilinx	LogiCORE	1-64 bits wide	
LD-based Parallel Latch	Xilinx	LogiCORE	1-256 bits wide	
RAM-based Shift Register	Xilinx	LogiCORE	1-256 bits wide, 1024 words deep	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 275 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Communication & Networking:				
3G FEC Package	Xilinx	LogiCORE	Viterbi Decoder, Turbo Codec, Convolutional Enc	3G Wireless Infrastructure
3GPP Compliant Turbo Convolutional Decoder	Xilinx	LogiCORE	3GPP specs, 2 Mb/s, BER=10-6 for 1.5dB SNR	3G Wireless Infrastructure
3GPP Compliant Turbo Convolutional Encoder	Xilinx	LogiCORE	Compliant w/ 3GPP, puncturing	3G Wireless Infrastructure
3GPP Turbo Decoder	SysOn Chip	AllianceCORE	3GPP/UMTS compliant, IMT-2000, 2Mb/s data	Error correction, wireless
8b/10b Decoder	Xilinx	LogiCORE	Industry std 8b/10b en/decode for serial data transmission	Physical layer of Fiber Channel
8b/10b Encoder	Xilinx	LogiCORE	Industry std 8b/10b en/decode for serial data transmission	Physical layer of Fiber Channel
ADPCM 1024 Channel	Amphion	AllianceCORE	G.721, 723, 726, 726a, 727, 727a, u-law, a-law	DECT, VOIP, cordless telephony
ADPCM 256 Channel	Amphion	AllianceCORE	G.721, 723, 726, 726a, 727, 727a, u-law, a-law	DECT, VOIP, cordless telephony
ADPCM 512 Channel	Amphion	AllianceCORE		
ADPCM 768 Channel	Amphion	AllianceCORE	G.721, 723, 726, 726a, 727, 727a, u-law, a-law	DECT, VOIP, cordless telephony
ADPCM Speech Codec, 32 Channel (DO-DI-ADPCM32)	Xilinx	LogiCORE	G.726, G.727, 32 duplex channels	DECT, VOIP, Wireless local loop, DSLAM, PBX
ADPCM Speech Codec, 64 Channel (DO-DI-ADPCM64)	Xilinx	LogiCORE	G.726, G.727, 64 duplex channels	DECT, VOIP, wireless local loop, DSLAM, PBX
BOOST LITE Bluetooth Baseband Processor	NewLogic	AllianceCORE	Compliant to Bluetooth v1.1, BQB qualified software for L2CAP, LHP, HC1, voice support	Bluetooth applications
BOOST Lite Bluetooth Baseband Processor	NewLogic	AllianceCORE	Compliant to Bluetooth v1.1, BQB qualified software for L2CAP, LHP, HC1, voice support	Bluetooth applications
Convolutional Encoder	Xilinx	LogiCORE	k from 3 to 9, puncturing from 2/3 to 12/13	3G base stations, broadcast, wireless LAN, cable modem, xDSL, satellite com, uwave

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 276 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Communication & Networking (continued):				
DVB-RCS Turbo Decoder	iCODING	AllianceCORE	DVB-RCS compliant, 9 Mb/s data rate, switchable code rates and frame sizes	Error correction, wireless, DVB, Satellite data link
Flexbus 4 Interface Core, 16-Channel (DO-DI-FLX4C16)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
Flexbus 4 Interface Core, 4-Channel (DO-DI-FLX4C4)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
Flexbus 4 Interface Core, 1-Channel (DO-DI-FLX4C1)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
HDLC Controller Core, 32 Channels	Xilinx	LogiCORE	32 full duplex, CRC-16/32, 8/16-bit address insertion/deletion	X.25, POS, cable modems, frame relay switches, video conferencing over ISDN
HDLC Controller Core, Single Channel	Xilinx	LogiCORE	16/32-bit frame seq, 8/16-bit addr insert/delete, flag/zerop insert/detect	X.25, POS, cable modems, frame relay switches, video conf. over ISDN
Interleaver/De-interleaver	Xilinx	LogiCORE	Convolutional, width up to 256 bits, 256 branches	Broadcast, wireless LAN, cable modem, xDSL, satellite com,uwave nets, digital TV
PE-MACMII Dual Speed 10/100 Mb/s Ethernet MAC	Alcatel	AllianceCORE	802.3 compliant, Supports single & multimode fiber optic devices, M11 interfaces, RMON and Etherstate statistics	Networking, Broadband, NIC, SOHO, Home networking, storage, routers, switches, printers
POS-PHY Level 3 Link Layer Interface Core, 48 Channel (DO-DI-POSL3LINK48A)	Xilinx	LogiCORE		
POS-PHY L3 Link Layer Interface, 16-Ch (DO-DI-POSL3LINK16)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
POS-PHY L3 Link Layer Interface, 4-Ch (DO-DI-POSL3LINK4)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
POS-PHY L3 Link Layer Interface, 2-Ch (DO-DI-POSL3LINK2)	Xilinx	LogiCORE		Line card: terabit routers & optical switches
POS-PHY L3 Link Layer Interface, Single Channel	Xilinx	LogiCORE		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 277 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Communication & Networking (continued):				
POS-PHY L4 Multi-Channel Interface (DO-DI-POSL4MC)	Xilinx	LogiCORE		
Reed-Solomon Decoder	Xilinx	LogiCORE	Std or custom coding, 3-12 bit symbol width, up to 4095 symbols	Broadcast, wireless LAN, digital TV, cable modem, xDSL, satellite com, uwave nets
Reed-Solomon Decoder	TILAB	AllianceCORE	parameterizable, RTL available	Error correction, wireless, DSL
Reed-Solomon Encoder	Xilinx	LogiCORE	Std or cust coding, 3-12 bit width, up to 4095 symbols with 256 check symb.	Broadcast, wireless LAN, digital TV, cable modem, xDSL, satellite com, uwave nets
SDLC Controller	CAST	AllianceCORE	Like Intel 8XC152 Global Serial Channel, Serial Comm., HDLC apps, telecom	Embedded systems, professional audio, video
SPEEDROUTER Network Processor	IP	AllianceCORE	Solution requires SPEEDAnalyzer ASIC, 2.5 Gb/s fdx wire speed; net processor (NPV)	Networking, edge and access, Switches and routers
Turbo Decoder - 3GPP	SysOn Chip	AllianceCORE	3GPP/UMTS compliant, 2 Mb/s data rate	Error correction, wireless
Turbo Encoder	TILAB	AllianceCORE	3GPP/UMTS compliant, upto 4 interleaver laws	Error correction, wireless
TURBO_DEC Turbo Decoder	TILAB	AllianceCORE	3GPP/UMTS compliant, >2 Mb/s data rate	Error correction, wireless
Viterbi Decoder	Xilinx	LogiCORE	Puncturing, serial & parallel architecture,	3G base stations, broadcast, wireless LAN, cable modem, xDSL, satellite com, uwave
Viterbi Decoder, IEEE 802-compatible	Xilinx	LogiCORE	Constraint length(k)=7, G0=171, G1=133	L/MMDS, cable modem, broadcast equip, wireless LAN, xDSL, sat com, uwave nets
Digital Signal Processing:				
1024-Point Complex FFT IFFT for Virtex-II	Xilinx	LogiCORE	16 bit complex data, 2's comp, forward and inverse transform	
16-Point Complex FFT IFFT for Virtex-II	Xilinx	LogiCORE	16 bit complex data, 2's comp, forward and inverse transform	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 278 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Digital Signal Processing (continued):				
256-Point Complex FFT IFFT for Virtex-II	Xilinx	LogiCORE	16 bit complex data, 2's comp, forward and inverse transform	
32 Point Complex FFT/IFFT	Xilinx	LogiCORE		
64-Point Complex FFT IFFT for Virtex-II	Xilinx	LogiCORE	16 bit complex data, 2's comp, forward and inverse transform	
Bit Correlator	Xilinx	LogiCORE	4096 taps, serial/parallel input, 4096 bits width	
Cascaded Integrator Comb (CIC)	Xilinx	LogiCORE	32 bits data width, rate change from 8 to 16384	
Direct Digital Synthesizer	Xilinx	LogiCORE	8-65K samples, 32-bits output precision, phase dithering/offset	
Distributed Arithmetic FIR Filter	Xilinx	LogiCORE	32-bit input/coeff width, 1024 taps, 1-8 chan, polyphase, online coeff reload	
GVA-300 Virtex-II DSP Hardware Accelerator	GV	AllianceCORE	2 Virtex-II, Spartan-II FPGAs, 1 CPLD, Matlab I/F	DSP prototyping
LFSR, Linear Feedback Shift Register	Xilinx	LogiCORE	168 input widths, SRL16/register implementation	
Math Functions:				
Accumulator	Xilinx	LogiCORE	1-256s bit wide	
Adder Subtracter	Xilinx	LogiCORE	1-256s bit wide	
DFP2INT Floating Point to Integer Converter	Digital	AllianceCORE	Full IEEE-754 compliance, 4 pipelines, Single precision real format support	DSP, Math, Arithmetic apps
DFPADD Floating Point Adder	Digital	AllianceCORE	Full IEEE-754 compliance, 4 pipelines, Single precision real format support	DSP, Math, Arithmetic apps
DFPCOMP Floating Point Comparator	Digital	AllianceCORE	Full IEEE-754 compliance, 4 pipelines, Single precision real format support	DSP, Math, Arithmetic apps
DFPDIV Floating Point Divider	Digital	AllianceCORE	Full IEEE-754 compliance, 15 pipelines, Single precision real format support	DSP, Math, Arithmetic apps

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 279 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Math Functions (continued):				
DFPMUL Floating Point Multiplier	Digital	AllianceCORE	Full IEEE-754 compliance, 7 pipelines,32x32 mult, Single precision real format support	DSP, Math, Arithmetic apps
DFPSQRT Floating Point Square Root	Digital	AllianceCORE	Full IEEE-754 compliance, 4 pipelines, Single precision real format support	DSP, Math, Arithmetic apps
DINT2FP Integer to Floating Point Converter	Digital	AllianceCORE	Full IEEE-754 compliance, double word input, 2 pipelines, Single precision real output	DSP, Math, Arithmetic apps
Multiply Accumulator (MAC)	Xilinx	LogiCORE	Input width up to 32 bits, 65-bit accumulator, truncation rounding	
Multiply Generator	Xilinx	LogiCORE	64-bit input data width, constant, reloadable or variable inputs, parallel/sequential implementation	
Pipelined Divider	Xilinx	LogiCORE	32-bit input data width, multiple clock per output	
Sine Cosine Look Up Table	Xilinx	LogiCORE	3-10 bit in, 4-32 bit out, distributed/block ROM	
Twos Complementer	Xilinx	LogiCORE	Input width up to 256 bits	
Memories & Storage Elements:				
Asynchronous FIFO	Xilinx	LogiCORE	1-256 bits, 15-65535 words, DRAM or BRAM, independent I/O clock domains	
Content Addressable Memory (CAM)	Xilinx	LogiCORE	1-512 bits, 2-10K words, SRL16	
Distributed Memory	Xilinx	LogiCORE	1-1024 bit, 16-65536 word, RAM/ROM/SRL16, opt output regs and pipelining	
Dual-Port Block Memory	Xilinx	LogiCORE	1-256 bits, 2-13K words	
Single-Port Block Memory	Xilinx	LogiCORE	1-256 bits, 2-128K words	
Synchronous FIFO	Xilinx	LogiCORE	1-256 bits, 16-256 words, distributed/block RAM	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 280 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Microprocessors, Controllers & Peripherals:				
10/100 Ethernet MAC	Xilinx	LogiCORE	Interfaces through OPB to MicroBlaze™	Networking, comm., processor applications
AX1610 16-bit RISC Processor	Loarant	AllianceCORE	44 opcode, 64-K word data, program, Harvard arch.	Control functions, State mach, Coprocessor
C165X MicroController	CAST	AllianceCORE	Microchip 16C5X PIC like	Embedded systems, telecom
C68000 Microprocessor	CAST	AllianceCORE	MC68000 Compatible	Embedded systems, pro audio, video
CPU FPGA (Virtex-II) MicroEngine Cards	NMI	AllianceCORE	Hitachi SH-3 CPU	Embedded systems
CZ80CPU Microprocessor	CAST	AllianceCORE	Zilog Z80 compatible, 8-bit processor	Embedded systems, Communications
DDR SDRAM Controller Core	Memec-Core	AllianceCORE	DDR SDRAM burst length support for 2,4,8 per access, supports data 16,32, 64, 72.	Digital video, embedded computing , networking
DFPIC125X Fast RISC MicroController	Digital	AllianceCORE	PIC 12c4x like, 2X faster, 12-bit wide instruction set, 33 instructions	Embedded systems, telecom, audio and video
DFPIC1655X Fast RISC MicroController	Digital	AllianceCORE	S/W compatible with PIC16C55X, 14-bit instruction set, 35 instructions	Embedded systems, telecom, audio and video
DFPIC165X Fast RISC MicroController	Digital	AllianceCORE	PIC 12c4x like, 2X faster, 12-bit wide instruction set, 33 instructions	Embedded systems, telecom, audio and video
DI2CM I2C Bus Controller Master	Digital	AllianceCORE	I2C-like, multi master, fast/std. modes	Embedded systems
DI2CM I2C Bus Controller Slave	Digital	AllianceCORE	I2C-like, Slave	Embedded
DI2CSB I2C Bus Controller Slave Base	Digital	AllianceCORE	I2C-like, Slave	Embedded Systems
DR8051 RISC MicroController	Digital	AllianceCORE	80C31 instruction set, RISC architecture 6.7X faster than standard 8051	Embedded systems, telecom, video
DR8051BASE RISC MicroController	Digital	AllianceCORE	80C31 instruction set, high speed multiplier, RISC architecture 6.7X faster than standard 8051	Embedded systems, telecom, video
DR8052EX RISC MicroController	Digital	AllianceCORE	80C31 instruction set, high speed mult/div ,RISC 6.7X faster than standard 8051	Embedded systems, telecom, video

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 281 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Microprocessors, Controllers & Peripherals (continued):				
e8254 Programmable Interval Timer/Counter	einfochips	AllianceCORE	Three 8-bit parallel ports, 24 programmable IO lines, 8-bit bidi data bus	Processor, I/O interface
e8255 Peripheral Interface	einfochips	AllianceCORE	Three 8-bit parallel ports, 24 programmable IO lines, 8-bit bidi data bus	Processor, I/O interface
Flip805x-PS Microprocessor	Dolphin	AllianceCORE	Avg 8X faster & code compatible v. legacy 8051, verification bus monitor, SFR IF, DSP focused	DSP, Telecom, industrial, high speed control
IIC Master and Slave	Xilinx	LogiCORE	Interfaces through OPB to MicroBlaze™	Networking, com, processor applic
LavaCORE Configurable Java Processor Core	Derivation	AllianceCORE	32b data/address optional DES	Internet appliance, industrial control
LavaCORE Configurable Java Processor Core	Derivation	AllianceCORE	32b data/address optional DES	Internet appliance, industrial control
Lightfoot 32-bit Java Processor Core	Digital	AllianceCORE	32bit data, 24 bit address, 3 Stage pipeline, Java/C dev. tools	Internet appliance, industrial control, HAVi multimedia, set top boxes
MicroBlaze™ Soft RISC Processor	Xilinx	LogiCORE	Soft RISC Processor, small footprint	Networking, communications
OPB Arbiter	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
OPB GPIO	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
OPB Interrupt Controller	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
OPB Memory Interface (Flash, SRAM)	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
OPB Timer/Counter	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
OPB UART (16450, 16550)	Xilinx	LogiCORE	Interfaces through OPB to MicroBlaze	Processor applications
OPB UART Lite	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 282 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Microprocessors, Controllers & Peripherals (continued):				
OPB WDT	Xilinx	LogiCORE	Bundled in the MicroBlaze Development Kit	Processor applications
PF3100 PC/104-Plus Reconfigurable Module	Derivation	AllianceCORE	PC/104 & PC/104+ devlopment board	Internet appliance, industrial control
SPI	Xilinx	LogiCORE	Interfaces through OPB to MicroBlaze	Networking, communications, processor applications
XF-UART Asynchronous Communications Core	Memec-Core	AllianceCORE	UART and baud rate generator	Serial data communication
Standard Bus Interfaces:				
PCI32 Virtex Interface Design Kit (DO-DI-PCI32-DKT)	Xilinx	LogiCORE	Includes PCI32 board, drive development kit, and customer education 3-day training class	
PCI32 Virtex Interface, IP Only (DO-DI-PCI32-IP)	Xilinx	LogiCORE	v2.2 comp, assured PCI timing, 3.3/5-V, 0-waitstate, CPCI hot swap friendly	PC add-in boards, CPCI, Embedded
PCI64 & PCI32, IP Only (DO-DI-PCI-AL)	Xilinx	LogiCORE	v2.2 comp, assured PCI timing, 3.3/5-V, 0-waitstate, CPCI hot swap friendly	PC boards, CPCI, Embedded, hiperf video, gb ethernet
PCI64 Virtex Interface Design Kit (DO-DI-PCI64-DKT)	Xilinx	LogiCORE	v2.2 comp, assured PCI timing, 3.3/5-V, 0-waitstate, CPCI hot swap friendly	PC boards, CPCI, Embedded, hiperf video, gb ethernet
PCI64 Virtex Interface, IP Only (DO-DI-PCI64-IP)	Xilinx	LogiCORE	v2.2 comp, assured PCI timing, 3.3/5-V, 0-waitstate, CPCI hot swap friendly	PC boards, CPCI, Embedded, hiperf video, gb ethernet
RapidIO 8-bit port LP-LVDS Phy Layer (DO-DI-RIO8-PHY)	Xilinx	LogiCORE	RapidIO Interconnect v1.1 compliant, verified with Motorola's RapidIO bus functional model v1.4	Routers, switches, backplane, control plane, data path, embedded sys, high speed interface to memory and encryption engines, high end video
USB 1.1 Device Controller	Memec-Core	AllianceCORE	Compliant with USB1.1 spec., Supports VCI bus, Performs CRC, Supports 1.5 Mb/s & 12 Mb/s	Scanners, Printers, Handhelds, Mass Storage

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 283 of 947

Table 3-64: **Virtex-II Pro IP Cores Support *(Continued)***

Function	Vendor Name	IP Type	Key Features	Application Examples
Video & Image Processing:				
1-D Discrete Cosine Transform	Xilinx	LogiCORE	8-24 bits for coeff & input, 8-64 pts	
2-D DCT/IDCT Forward/Inverse Discrete Cosine Transform	Xilinx	LogiCORE		image, video phone, color laser printers
FASTJPEG_BW Decoder	BARCO-SILEX	AllianceCORE	Conforms to ISO/IEC Baseline 10918-1, Gray-Scale	Video editing, digital camera, scanners
FASTJPEG_C Decoder	BARCO-SILEX	AllianceCORE	Conforms to ISO/IEC Baseline 10918-1, color, multi-scan, Gray-Scale	Video editing, digital camera, scanners

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 284 of 947

Chapter 4

Configuration

Summary

This chapter covers the following topics:

- Introduction
- Configuration Solutions
- Master Serial Programming Mode
- Slave Serial Programming Mode
- Master SelectMAP Programming Mode
- Slave SelectMAP Programming Mode
- JTAG/ Boundary Scan Programming Mode
  - Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1149.1
  - Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1532
- Configuration Details
- Readback

Introduction

Virtex-II Pro devices are configured by loading application-specific configuration data into internal memory. Configuration is carried out using a subset of the device pins, some of which are dedicated, while others can be reused as general-purpose inputs and outputs after configuration is complete.

Depending on the system design, several configuration modes are selectable via mode pins. The mode pins M2, M1, and M0 are dedicated pins. An additional pin, HSWAP_EN, is used in conjunction with the mode pins to select whether user I/O pins have pull-up resistors during configuration. By default, HSWAP_EN is tied High (internal pull-up resistor), which shuts off pull-up resistors on the user I/O pins during configuration. When HSWAP_EN is tied Low, the pull-up resistors are on and therefore, the user I/Os have pull-up resistors during configuration.

Other dedicated pins are:

- CCLK - the configuration clock pin
- DONE - configuration status pin
- TDI, TDO, TMS, TCK - boundary-scan pins
- PROG_B - configuration reset pin

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 285 of 947

Depending on the configuration mode selected, CCLK can be an output generated by the Virtex-II Pro FPGA or an input accepting externally generated clock data. For correct operation, these pins require a V_{CCAUX} of 2.5V to permit LVCMOS operations.

All dual-function configuration pins are contained in banks 4 and 5. Bank 4 contains pins used in serial configuration modes, and banks 4 and 5 contain pins used for SelectMAP modes.

A persist option is available, which can be used to force pins to retain their configuration function even after device configuration is complete. If the persist option is not selected, then the configuration pins with the exception of CCLK, PROG_B, and DONE can be used for user I/O in normal operation. The persist option does not apply to boundary-scan related pins. The persist feature is valuable in applications that employ partial reconfiguration, dynamic reconfiguration, or readback.

Configuration Modes

Virtex-II Pro supports the following configuration modes:

- Master-Serial
- Slave-Serial (default)
- Master SelectMAP
- Slave SelectMAP
- Boundary-Scan (IEEE 1532 and IEEE 1149)

Table 4-1 shows Virtex-II Pro configuration mode pin settings.

Table 4-1: **Virtex-II Pro Configuration Mode Pin Settings**

Configuration Mode(1)	M2	M1	M0	CCLK Direction	Data Width	Serial Dout(2)
Master Serial	0	0	0	Out	1	Yes
Slave Serial	1	1	1	In	1	Yes
Master SelectMAP	0	1	1	Out	8	No
Slave SelectMAP	1	1	0	In	8	No
Boundary Scan	1	0	1	N/A	1	No

Notes:

1. The HSWAP_EN pin controls the pullups. Setting M2, M1, and M0 selects the configuration mode, while the HSWAP_EN pin controls whether or not the pullups are used.
2. Daisy chaining is possible only in modes where Serial Dout is used. For example, in SelectMAP modes, the first device does NOT support daisy chaining of downstream devices.

Table 4-2 lists the total number of bits required to configure each device:

Table 4-2: **Virtex-II Pro Bitstream Lengths**

Device	Total Number of Configuration Bits	Device	Total Number of Configuration Bits
XC2VP2	1,305,440	XC2VP40	15,868,256
XC2VP4	3,006,560	XC2VP50	19,021,408
XC2VP7	4,485,472	XC2VP70	26,099,040
XC2VP20	8,214,624	XC2VP100	34,292,832
XC2VP30	11,589,984	XC2VP125	43,602,784

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 286 of 947

Configuration Process and Flow

The configuration process involves loading the configuration bitstream into the FPGA using the selected mode. There are four major phases in the configuration process:

- Clearing Configuration Memory
- Initialization
- Loading Configuration Data
- Device Startup

Figure 4-1 illustrates the configuration process flow.

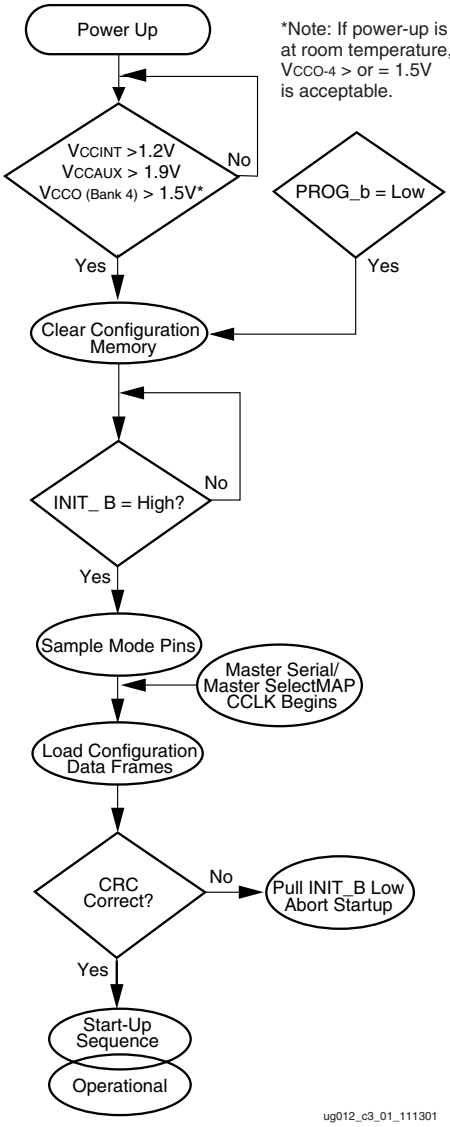


Figure 4-1: **Configuration Process**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 287/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 287 of 947

Power Up

The V_{CCINT} power pins must be supplied with a 1.5V source. (Refer to the Virtex-II Pro Data Sheet for DC characteristics.) The IOB voltage input for Bank 4 (V_{CCO_4}) and the auxiliary voltage input (V_{CCAUX}) are also used as a logic input to the Power-On-Reset (POR) circuitry. Even if this bank is not being used, V_{CCO_4} must be connected to a 1.5V or greater source.

Clearing Configuration Memory

In the memory clear phase, non-configuration I/O pins are 3-stated with optional pull-up resistors. The INIT_B and DONE pins are driven Low by the FPGA, and the memory is cleared. After PROG_B transitions High, memory is cleared twice and initialization can begin.

The INIT_B pin transitions High when the clearing of configuration memory is complete. A logic Low on the PROG_B input resets the configuration logic and holds the FPGA in the clear configuration memory state. When PROG_B is released, the FPGA continues to hold INIT_B Low until it has completed clearing all of the configuration memory. The minimum Low pulse time for PROG_B is defined by the $T_{PROGRAM}$ timing parameter. There is no maximum value. The power-up timing of configuration signals is shown in Figure 4-2. Corresponding power-up timing characteristics are detailed in the Virtex-II Pro Data Sheet (Module 3).

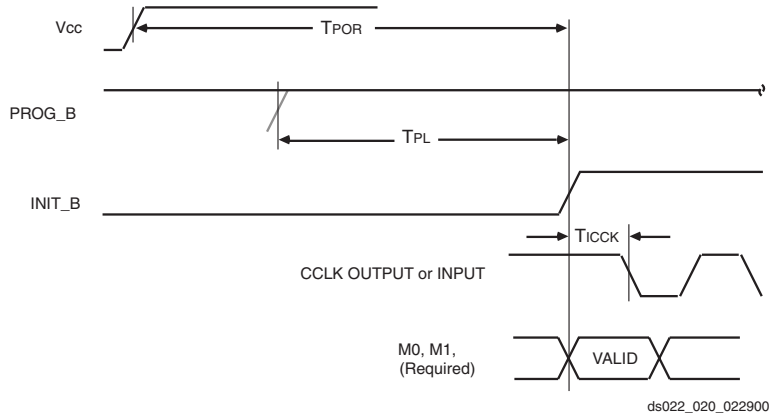


Figure 4-2: **Power-Up Timing Configuration Signals**

Initialization

For the initialization phase, the INIT_B pin is released, the mode pins are sampled, the appropriate pins become active, and the configuration process begins. It is possible to delay configuration by externally holding INIT_B Low.

Delaying Configuration

The INIT_B pin can also be held Low externally to delay configuration of the FPGA. The FPGA samples its mode pins on the rising edge of INIT_B. After INIT_B transitions to High, configuration can begin. No additional time-out or waiting periods are required, but configuration does not need to commence immediately after the transition of INIT_B. The

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 288 of 947

configuration logic does not begin processing data until the synchronization word from the bitstream is loaded.

Loading Configuration Data

Once configuration begins, the target FPGA starts to receive data frames. Cyclic Redundancy Checking (CRC) is performed before and after the last data frame. CRC is also automatically checked after each block write to an internal data register (FDRI). If the CRC checks prove valid, the device start-up phase can begin.

If the CRC values do not match, INIT_B is asserted Low to indicate that a CRC error has occurred, startup is aborted, and the FPGA does not become active.

To reconfigure the device, the PROG_B pin should be asserted to reset the configuration logic. Recycling power also resets the FPGA for configuration. For more information on CRC calculation, see "Cyclic Redundancy Checking Algorithm," page 336.

The details of loading configuration data in each of the five modes are discussed in the following sections:

- "Master Serial Programming Mode," page 298
- "Master SelectMAP Programming Mode," page 301
- "Slave Serial Programming Mode," page 299
- "Slave SelectMAP Programming Mode," page 305
- "JTAG/ Boundary Scan Programming Mode," page 308

After the last data frame is loaded, the global set/reset (GSR) signal will be pulsed. It will set/reset all registers in the device prior going to the startup sequence, which is the next configuration phase.

Device Startup

Device startup is a transition phase from the configuration mode to normal programmed device operation. Although the order of the start-up events are user programmable via software, the default sequence of events is as follows:

Upon completion of the start-up sequence, the target FPGA is operational.

The Start-Up Sequencer is an 8-phase sequential state machine that counts from phase 0 to phase 7. (See Figure 4-3.)

The Start-Up Sequencer performs the following tasks:

- Release the DONE pin.
- Negate GTS, activating all of the I/Os.
- Assert GWE, allowing all RAMs and flip-flops to change state.
- Assert EOS. The End-Of-Start-Up flag is always set in phase 7. This is an internal flag that is not user accessible.

BitGen options control the order of the Start-Up Sequence. The default Start-Up Sequence is the bold line in Figure 4-3. The Start-Up Sequence can also be stalled at any phase until either DONE has been externally forced High, or a specified DCM or DCI has established LOCK. For details, see Appendix A, "BitGen and PROMGen Switches and Options."

At the cycle selected for the DONE to be released, the sequencer always waits in that state until the DONE is externally released. However, this does not delay the GTS or GWE if they are selected to be released prior to DONE. Therefore, DONE is selected first in the sequence for default settings.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 289 of 947

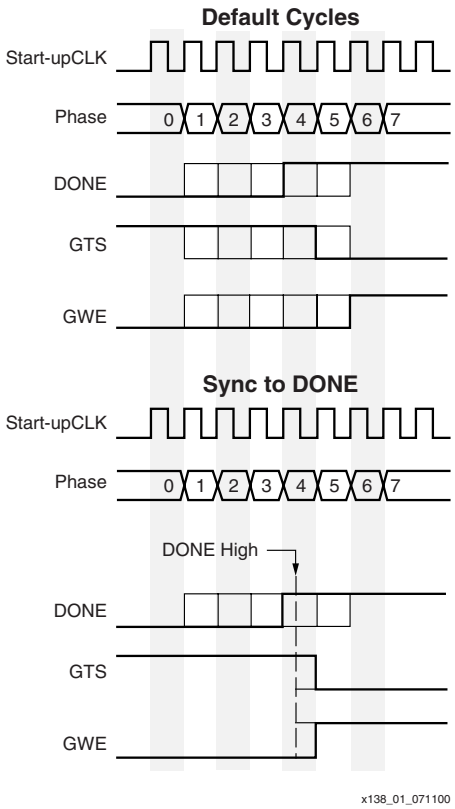


Figure 4-3: **Default Start-Up Sequence**

Configuration Pins

Dedicated pins (CCLK, PROG_B, DONE, M2, M1, and M0) powered by V_{CCAUX} are designated for configuration. Dual-function pins (D0/DIN, D1:D7, CS_B, RDWR_B, BUSY/DOUT and INIT_B) powered by V_{CCO} are designated for configuration and other user functions after configuration. Table 4-3 is the list of all dedicated, dual-function, and user pins.

Before and during configuration, all configuration I/O pins are set for the LVCMOS25(12mA, fast slew rate) standard when V_{CCO} is 2.5V. It becomes LVCMOS33 (16mA, fast slew rate) when V_{CCO} is 3.3V.

The configuration clock pin CCLK follows the standard above except the slew rate is slow.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 290 of 947

Table 4-3: **Virtex-II Pro Pins and Bias Voltages**

Pin Name	Direction	Bias Voltage (V)	Comments
CCLK	Input/Output	2.5	Pin is biased by V_{CCAUX}. Input cannot be driven at 3.3V levels. Output is LVCMOS25 and compatible with LVTTL
PROG_B	Input	2.5	Pin is biased by V_{CCAUX} (2.5V). The external pullup needs to be at 2.5V.
DONE	Open-drain output	2.5	Pin is biased by V_{CCAUX} (2.5V). Input cannot be driven at 3.3V levels or pulled up higher than 2.5V
M2, M1, M0	Input	2.5	Pin is biased by V_{CCAUX} (must be 2.5V). Do not connect to voltage higher than 2.5V
HSWAP_EN	Input	2.5	Pin is biased by V_{CCAUX} (must be 2.5V). Do not connect to voltage higher than 2.5V
TDI	Input	2.5/3.3	Powered by V_{CCAUX}. Although pin is 3.3V tolerant.
TMS	Input	2.5/3.3	Powered by V_{CCAUX}. Although pin is 3.3V tolerant.
TCK	Input	2.5/3.3	Powered by V_{CCAUX}. Although pin is 3.3V tolerant.
TDO	Open-drain Output	2.5/3.3	Pin is open-drain and can be pulled to 3.3V. External pullup is recommended to be greater than 200 Ω There is no internal pullup.
PWRDWN_B	Input	2.5	Pin is biased by V_{CCAUX} (2.5V). It has internal pullup. Do not pull up externally higher than 2.5V
D0/DIN-D7	Input/Output	2.5/3.3	Pins are biased by V_{CCO}
CS_B	Input	2.5/3.3	Pins are biased by V_{CCO}
RDWR_B	Input	2.5/3.3	Pins are biased by V_{CCO}
BUSY/DOUT	Input	2.5/3.3	Pins are biased by V_{CCO}
INIT_B	Input	2.5/3.3	Pins are biased by V_{CCO}
VRP	Input	N/A	Reference resistor pulled to GND
VRN	Input	2.5/3.3	Reference resistor must be pulled to V_{CCO}
ALT_VRP	Input	N/A	Reference resistor pulled to GND
ALT_VRN	Input	2.5/3.3	Reference resistor must be pulled to V_{CCO}
V_{REF}	Input	2.5/3.3	Depends on the I/O standard used.
DXN, DXP	N/A	N/A	These are the cathode and anode of the temperature diode
V_{BATT}	Input	3.0	Lower voltage could lead to longer battery life
User I/O	Input/Output	1.5/1.8/ 2.5/3.3	Must be supported by a 3.3V signaling standard (LVTTL, LVCMOS, PCI33, PCI66, PCIX, LVDCI33)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 291 of 947

Mixed Voltage Environments

Virtex-II Pro devices have separate voltage sources. V_{CCINT} (1.5V) powers the internal circuitry. V_{CCAUX} (2.5V) powers the input buffers and auxiliary circuitry. V_{CCO} (1.5V, 1.8V, 2.5V, or 3.3V) powers the IOB circuitry. SelectIO-Ultra is separated into eight banks of I/O groups. Each bank can be configured with one of several I/O standards. Refer to Chapter 3, "Design Considerations" for I/O banking rules and available I/O standards. Before and during configuration, all I/O banks are set for the LVCMOS25 (12mA) standard.

Table 4-4: **Configuration Modes and V_{CCO} Voltages**

Configuration Mode	Pins Used	V_{CCO_4}	V_{CCO_5}
JTAG	Dedicated Pins	not a concern	not a concern
Serial	Dedicated Pins plus DOUT, DIN, and INIT	2.5V/3.3V	not a concern
SelectMAP	Dedicated Pins plus dual-function pins	2.5V/3.3V	2.5V/3.3V

All dedicated configuration pins are powered by V_{CCAUX}. All dual-function configuration pins are located within banks 4 and 5. As described under "Configuration Process and Flow", the V_{CCO_4} input voltage is used as a logic input to the power-on-reset (POR) circuitry.

JTAG Configuration Mode

For JTAG configuration mode, JTAG inputs are independent of V_{CCO} and work between 2.5V and 3.3V TTL levels (V_{IL} max = .8V, V_{IH} min = 2.0V). The JTAG input pins are 3.3V tolerant. The JTAG output (TDO) is an open-drain output and must be pulled up to the appropriate voltage level (typically 3.3V) through an external resistor. The value of the external pullup resistor depends on the capacitive loading on the TDO pin and the operating frequency. It is recommended that a resistor of 200Ω or higher be used. The optimal TDO pullup value can be determined through IBIS simulation.

Serial Configuration Mode

For Serial configuration mode, all of the configuration pins are in bank 4. V_{CCO} pins of bank 4 can either be at 2.5V or 3.3V.

Xilinx recommends using the XC18V00 series of In-System Programmable Configuration PROMs. This family provides 3.3V or 2.5V output capability. In Master serial mode, the V_{CCO} of the 18V00 PROM and the V_{CCO} of the Virtex-II Pro FPGA should connect to the same voltage level (2.5V/3.3V).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 292 of 947

The DO pin of the PROM is at LVCMOS25 levels, and the DIN pin of the Virtex-II Pro is at LVTTL levels. Therefore, they are compatible. Figure 4-4 shows the Virtex-II Pro FPGA and the XC18V00 PROM in master serial configuration.

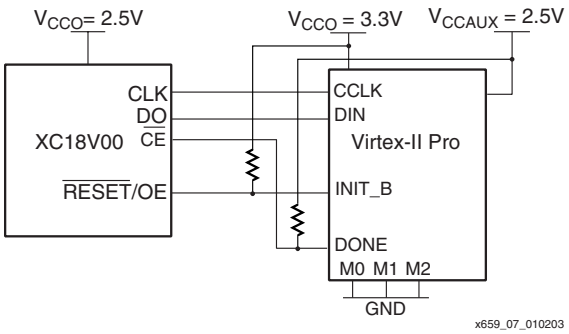


Figure 4-4: **Virtex-II Pro and XC18V00 PROM in Master Serial Configuration**

In Slave serial mode, the V_{CCO} of the FPGA can be either 2.5V or 3.3V. However, make sure the CCLK pin of the FPGA is not exposed to more than 2.5V, since this is a 2.5V pin powered by V_{CCAUX}.

SelectMAP Configuration Mode

For SelectMAP configuration mode, all of the configuration pins are in banks 4 and 5. V_{CCO} pins for these banks can either be 2.5V or 3.3V.

Special V_{CCO} Requirements during Configuration and Readback

Serial or SelectMAP configuration modes require V_{CCO} to be either 2.5 or 3.3V in banks 4 and 5. If the I/O standard used in operation requires a V_{CCO} other than 2.5V or 3.3V, the V_{CCO} of these banks must be switched from 2.5V/3.3V to the voltage intended to be used. For example, if a 1.5V standard such as HSTL is used in bank 4 and the device is configured by serial configuration mode, V_{CCO} must be switched from the 2.5V used during configuration to 1.5V for normal operation.

Similary, before a readback is performed in SelectMAP mode during non-2.5V/3.3V I/O operation, the V_{CCO} of banks 4 and 5 should be switched to 2.5V/3.3V.

Configuration Solutions

Several configuration solutions are available to support Virtex-II Pro devices, each targeted to specific application requirements. Guidance and support (application notes, reference designs, and so forth) is also available for designers looking to develop and implement their own configuration solution for Virtex FPGAs.

System Advanced Configuration Environment (System ACE™) Series

The System ACE series of configuration solutions offers a system-level configuration manager for designers using multiple FPGAs or FPGAs requiring multiple bitstreams. This solution combines standard industry Flash storage with Xilinx-designed configuration control. Features common to the entire System ACE family include:

- Support for multiple bitstreams

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 293 of 947

- Built-in support for embedded processors in FPGAs
- Support for reconfiguring, updating, or debugging systems over a network
- Built-in system interface
- Scalability (density) and reusability (across many designs)
- Centralization of configuration control for reduced board space and simpler debugging
- Use of excess storage capacity for non-configuration, system storage

System ACE CF

System ACE CF (CompactFlash™) solution combines a standard CompactFlash Association (CFA) Type-I or Type-II memory module (CompactFlash or 1" disk drive) with a Xilinx-designed ACE Controller™ configuration control chip. See Figure 4-5.

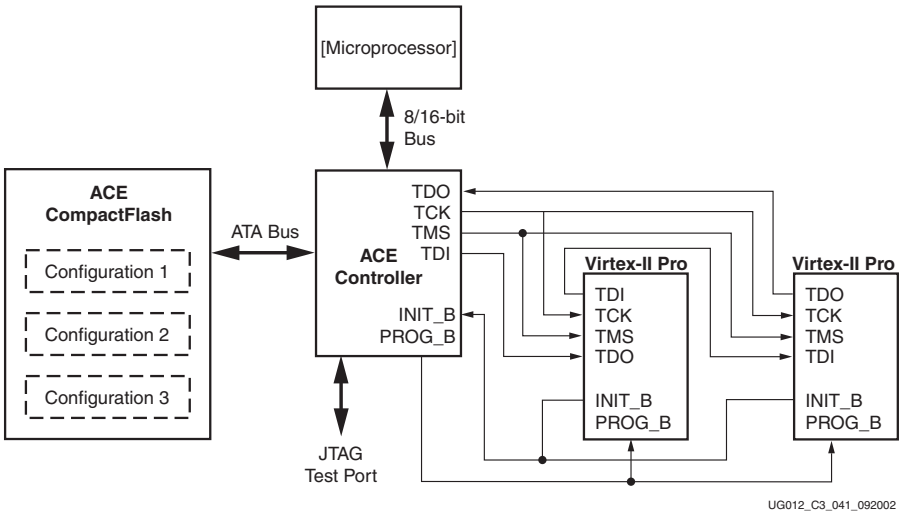


Figure 4-5: **System ACE CompactFlash and Controller**

The CompactFlash card stores an unlimited number of bitstreams and ranges in density from 128 Mb to 3 Gb. This card is capable of storing one large bitstream or several smaller bitstreams. If several bitstreams are used, the system can be set up so that individual bitstreams are callable as needed, allowing for dynamic reconfiguration of the Virtex-II Pro device and other Xilinx FPGAs in the JTAG chain.

The ACE Controller drives bits through the FPGA JTAG chain and has three other ports:

- A port for interfacing with a microprocessor, a network, or a MultiLINX cable
- A port for interfacing with the CompactFlash card
- A port that provides access to the FPGA JTAG chain for FPGA testing or configuration via automatic test equipment or via desktop or third-party programmers

For further information on any System ACE product, visit the www.xilinx.com/systemace website.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 294 of 947

System ACE Multi-Package Module (MPM)

System ACE MPM is a multi-package module consisting of a packaged standard Flash from AMD, a packaged FPGA, and a packaged configuration PROM, all in a 388-pin BGA package. The Flash stores configuration and other data, while the FPGA acts as an advanced configuration controller and is configured by the PROM. This solution provides high density and high-speed configuration capability in a single package, helping to simplify the design and manufacturing process. It is available in 16 Mb, 32 Mb, and 64 Mb densities.

System ACE Soft Controller (SC)

System ACE SC is a downloadable version of the configuration controller found in System ACE MPM; versions are provided that support various standard Flash interfaces. System ACE SC provides all of the features of System MPM without the Single Package. It allows designers to use the Flash memory already in their system to store configuration data. The System ACE SC controller is available free of charge in the form of a PROM file that can be downloaded from the System ACE website. This pre-engineered solution is implemented by connecting up to four Flash chips on a board to an FPGA that will be used as a configuration controller and then downloading the controller file into a PROM. Figure 4-6 describes the controller for both System ACE MPM and System ACE SC.

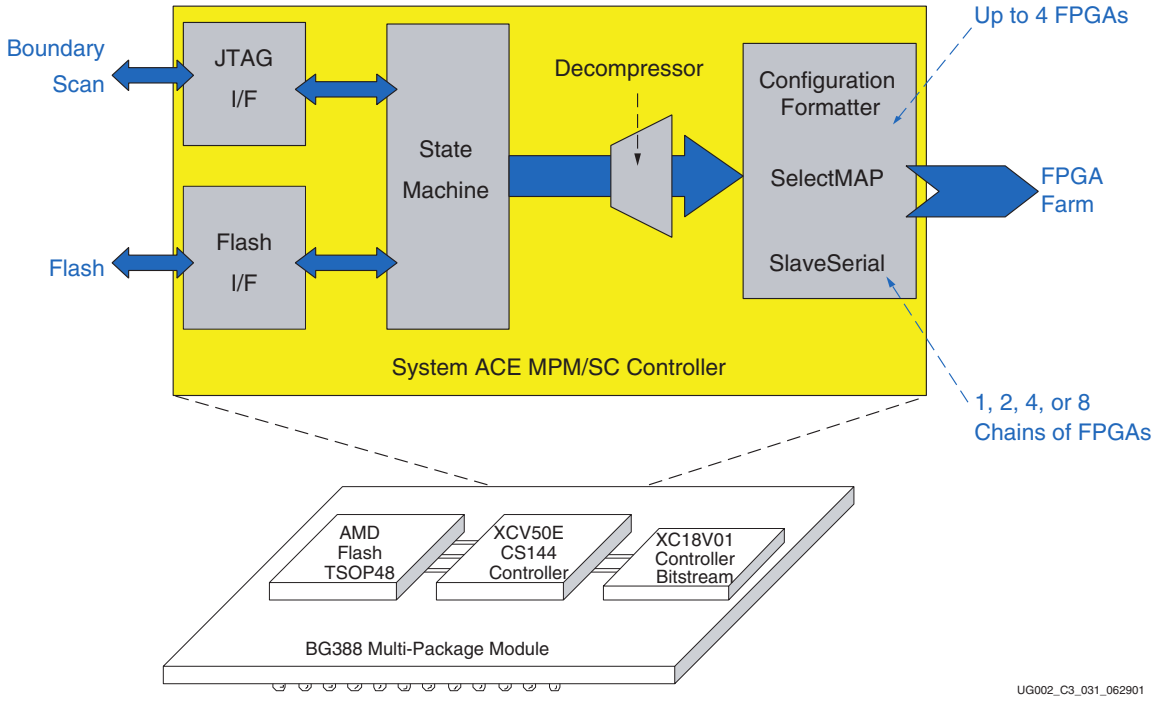


Figure 4-6: **System ACE MPM/SC Controller**

System ACE MPM and System ACE SC have these unique features:

- High speed configuration up to 154 Mb/s

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 295 of 947

- Support for both SelectMAP (8-bit) (see Figure 4-7) and Slave Serial (1-bit) (see Figure 4-8) configuration
- Configuration of multiple FPGAs in parallel
- Bitstream compression for increased storage capability
- Storage of up to 8 different bitstreams

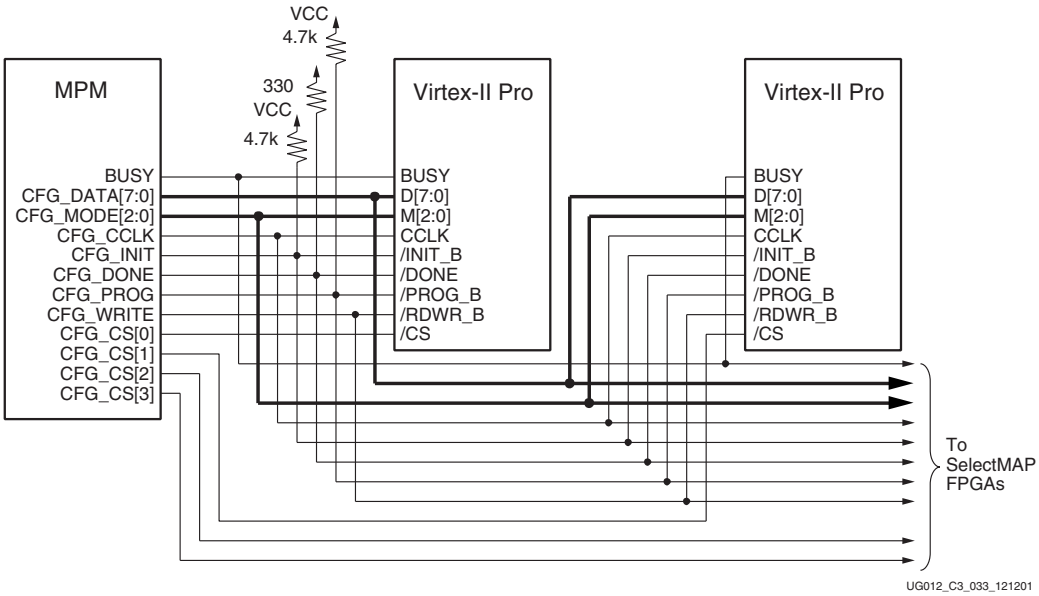


Figure 4-7: **SelectMAP (8-bit) Configuration**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 296 of 947

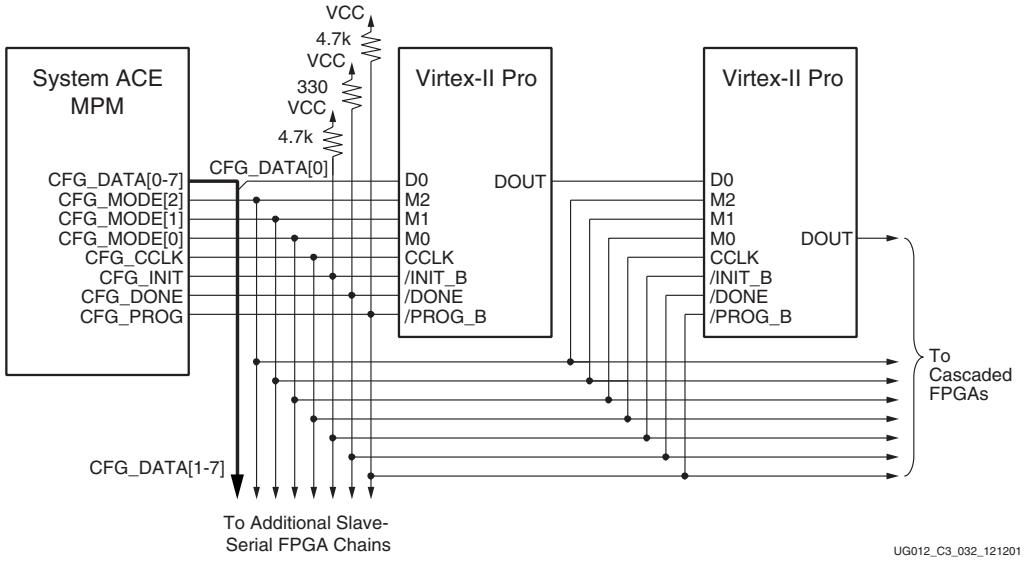


Figure 4-8: **Slave Serial (1-bit) Configuration**

Configuration PROMs

Using XC18V00 PROMs

The XC18V00 family of Flash in-system programmable (ISP) configuration PROMs offers the flexibility of re-programmability and multiple package offerings, combined with both serial and SelectMAP FPGA configurability. This family is JTAG programmable and ranges in density from 256 Kb to 4 Mb; these PROMs can also be cascaded to support larger bitstreams.

The 18V00 family offers data throughput rates of up to 264 Mb/s. It is also capable of triggering FPGA reconfiguration via a JTAG command. The parts can be JTAG programmed via cable, HW-130, or standard third party programmers. The XC18V00 PROMs are available in SO20, PC20, VQ44, and PC44 packages. Refer to Appendix B, "XC18V00 Series PROMs" for the latest version of the XC18V00 PROMs data sheet and package diagrams for the entire PROM family. See Table 4-5 to determine which PROMs go with which Virtex-II Pro FPGAs.

Using XC17V00 PROMs

The XC17V00 family of one-time programmable (OTP) PROMs provides a proven, low-cost, compact, and pre-engineered configuration solution. Ranging from 1 Mb to 16 Mb, this family is also the PROM density leader; it can also be daisy-chained to support larger bitstreams. This family supports serial configuration of Virtex-II Pro FPGAs; in addition, the XC17V08 and XC17V16 support SelectMAP configuration modes.

The XC17V00 family can be used for stabilized designs that are in a high-volume production flow and/or for designs requiring a low-cost solution. XC17V00 PROMs can be programmed either by using the HW-130 or by using a variety of third-party programmers. The XC17V00 PROMs are available in VO8, SO20, PC20, VQ44, and PC44

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 297 of 947

packages. Data sheets for PROMs are available at www.xilinx.com. See Table 4-5 to determine which PROMs go with which Virtex-II Pro FPGAs and see Appendix B, "XC18V00 Series PROMs" for package diagrams.

Flash PROMs With a CPLD Configuration Controller

Some designers prefer to leverage existing Flash memory in their system to store the configuration bitstreams. A small CPLD-based configuration controller can provide the mechanism to access the bitstreams in the FLASH and deliver them quickly to Virtex-II Pro devices. The following application notes describe the details for a serial or SelectMAP configuration architecture using FLASH memories and CPLDs:

- XAPP079, *Configuring Xilinx FPGAs Using an XC9500 CPLD and Parallel PROM* (www.xilinx.com/apps/xappsumm.htm#xapp079) describes an architecture that configures a chain of Virtex-II Pro devices using Master-Serial mode. See Figure 4-9 for an example of FPGA configuration using a CPLD and a parallel PROM.

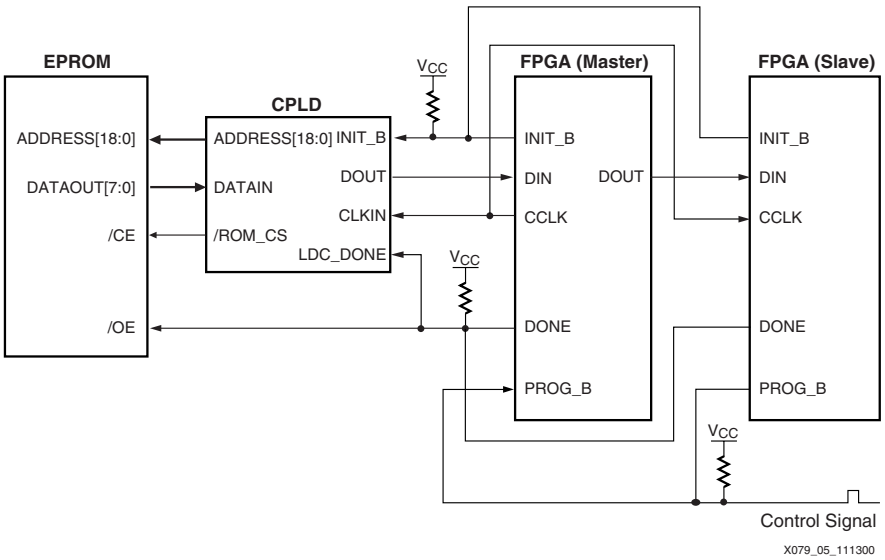


Figure 4-9: **Configuring Virtex-II Pro Devices Using a CPLD and Parallel PROM**

- XAPP137, *Configuring Virtex FPGAs From Parallel EPROMs With a CPLD* (www.xilinx.com/apps/xappsumm.htm#xapp137) describes an architecture that configures one or more Virtex-II Pro devices using the Slave SelectMAP mode. See Figure 4-10 for an example of FPGA configuration using a CPLD and a parallel EPROM.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 298 of 947

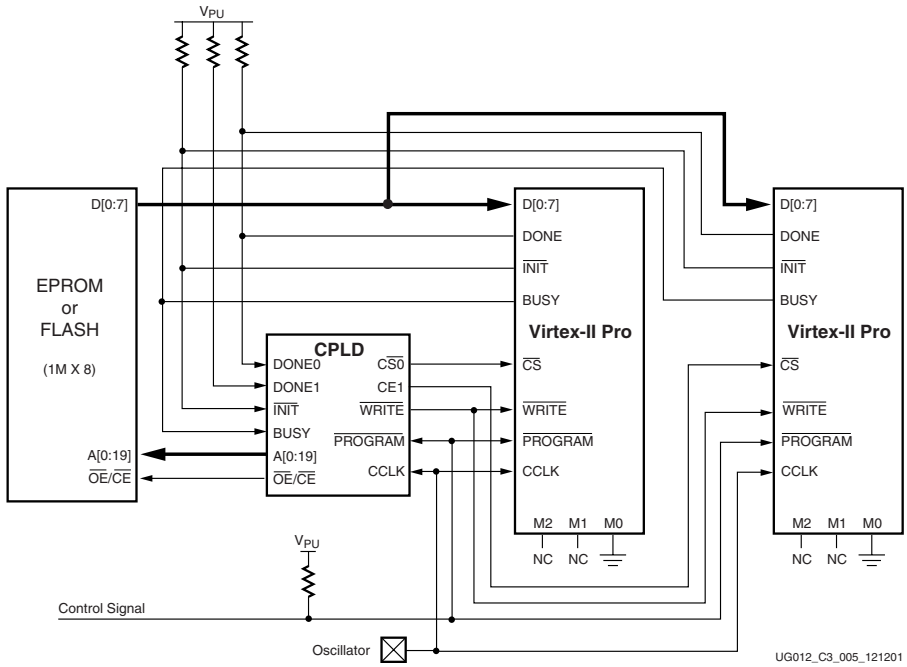


Figure 4-10: **Configuring Virtex-II Pro Devices from Parallel EPROMs**

Embedded Solutions

Using an Embedded Microcontroller

XAPP058, *Xilinx In-System Programming Using an Embedded Microcontroller* (www.xilinx.com/apps/xappsumm.htm#xapp058) describes a compact and robust process that (re)configures Virtex-II Pro devices directly from a microprocessor through the JTAG test port of the Virtex-II Pro device. The process additionally supports (re)configuration of XC18V00 ISP PROMs and CPLDs that reside on the JTAG scan chain. Portable, reference C-code is provided with the application note for rapid implementation.

Using IEEE Standard 1532

Systems that implement an IEEE Standard 1532 player can configure Virtex-II Pro devices. Users will require a 1532 BSDL file and a 1532 configuration data file. 1532 BSDL files for Xilinx devices and information on the Xilinx JDRIVE 1532 configuration engine are available here:

http://www.support.xilinx.com/xlnx/xil_prodcat_landingpage.jsp?title=Configuration+Solutions

Choose the **JDrive Engine** entry from the selection menu on the left of the page.

PROM and System ACE Selection Guide

Use Table 4-5 to determine which PROM or System ACE device goes with which Virtex-II Pro FPGA.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 299/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 299 of 947

Table 4-5: **PROM and System ACE Solutions for Virtex-II Pro Devices**

		PROM Solution		System ACE Solution	
Virtex-II Pro Device	**Bitstream Length (bits)**	**One-Time Programmable (OTP)**	**In-System Programmable (ISP)**	**Multi-Package Module (MPM)**	**CompactFlash (CF)(1)**
XC2VP2	1,305,504	XC17V01	XC18V02	XCCACEM16	XCCACE128
XC2VP4	3,006,624	XC17V04	XC18V04	XCCACEM16	XCCACE128
XC2VP7	4,485,536	XC17V08	XC18V02 + XC18V04	XCCACEM16	XCCACE128
XC2VP20	8,214,688	XC17V08	2 x XC18V04	XCCACEM16	XCCACE128
XC2VP30	11,364,608	XC17V08 + XC17V04	3 x XC18V04	XCCACEM16	XCCACE128
XC2VP40	15,563,264	XC17V16	4 x XC18V04	XCCACEM16	XCCACE128
XC2VP50(2)	19,021,472	XC17V16 + XC17V04	5 x XC18V04	XCCACEM32	XCCACE128
XC2VP70(2)	25,604,096	XC17V16 + XC17V16	6 x XC18V04 + XC18V512	XCCACEM32	XCCACE128
XC2VP100(2)	33,645,312	2 x XC17V16 + XC17V01	8 x XC18V04 + XC18V256	XCCACEM64	XCCACE128
XC2VP125(2)	42,782,208	3 x XC17V16	10 x XC18V04 + XC18V01	XCCACEM64	XCCACE128

Notes:

1. Requires XCCACE-TQ144 CompactFlash Controller
2. Xilinx recommends the System ACE Configuration Solution for these larger density parts. Storing configuration data by cascading multiple independent PROMs requires careful signal integrity and power supply planning.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 300 of 947

Software Support and Data Files

This section provides information on Xilinx device programming software and configuration-related data files.

iMPACT

To program Virtex-II Pro and other Xilinx devices with a personal computer, Xilinx provides iMPACT as a part of the ISE software package. A free version of iMPACT is also available through the WebPACK software suite. More information on WebPACK is available at:

http://www.support.xilinx.com/xlnx/xil_prodcat_landingpage.jsp?title=ISE+WebPack

Programming Cables

iMPACT supports several Xilinx programming cables that are compatible with Virtex-II Pro devices, including the Parallel-Cable III, Parallel-Cable IV, and MultiLINX cables. For more information on these cables, or to order programming cables online, please visit:

http://www.support.xilinx.com/xlnx/xil_prodcat_product.jsp?title=csd_cables

Boundary Scan Interconnect Testing for Virtex-II Pro Devices

Virtex-II Pro supports the EXTEST, INTEST, and SAMPLE/PRELOAD instructions that are required for Boundary Scan interconnect tests. Xilinx does not provide direct support for Boundary Scan software, although several third party suppliers offer Boundary Scan test equipment that is compatible with Virtex-II Pro. A list of third-parties offering Boundary Scan test equipment is available at:

http://www.support.xilinx.com/xlnx/xil_prodcat_landingpage.jsp?title=Configuration+Solutions

Choose **Third-Party Tools** from the selection menu on the left of the page.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 301 of 947

Master Serial Programming Mode

In serial configuration mode, the FPGA is configured by loading one bit per CCLK cycle. In Master Serial mode, the FPGA drives the CCLK pin. In Slave Serial mode, the FPGAs CCLK pin is driven by an external source. In both serial configuration modes, the MSB of each data byte is always written to the DIN pin first.

The Master Serial mode is designed so the FPGA can be configured from a Serial PROM, Figure 4-11. The speed of the CCLK is selectable by BitGen options, see "Appendix A, "BitGen and PROMGen Switches and Options." Be sure to select a CCLK speed supported by the PROM.

Figure 4-11 shows a Master Serial FPGA configuring from a PROM.

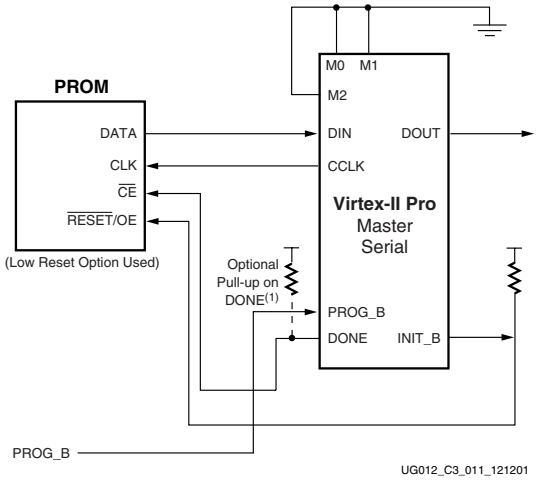


Figure 4-11: **Master Serial Mode Circuit Diagram**

Notes:

1. If the Virtex-II Pro device has not selected the DriveDONE option, then an external pull-up resistor of 330Ω should be added to the DONE pin. This pull-up resistor is not needed if DriveDONE = Yes.

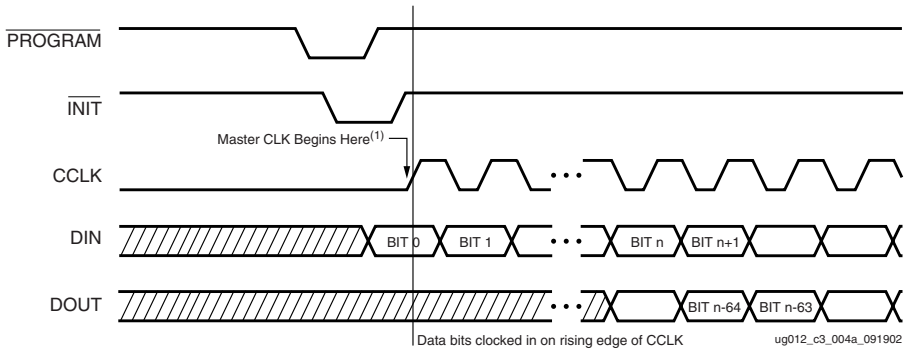


Figure 4-12: **Master Serial Configuration Clocking Sequence**

Notes:

1. For Master configurations, the CCLK does not transition until after initialization as indicated by the arrow.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 302 of 947

Slave Serial Programming Mode

In serial configuration mode, the FPGA is configured by loading one bit per CCLK cycle. In Slave Serial mode, the FPGAs CCLK pin is driven by an external source. In both serial configuration modes, the MSB of each data byte is always written to the DIN pin first.

The Slave Serial configuration mode allows for FPGAs to be configured from other logic devices, such as microprocessors, or in a daisy-chain fashion. Figure 4-13 shows a Master Serial FPGA configuring from a PROM with a Slave Serial FPGA in a daisy chain with the Master.

Daisy-Chain Configuration

Virtex-II Pro FPGAs can be used in a daisy-chain configuration only with XC4000X, SpartanXL, Spartan-II, or other Virtex FPGAs. For serial daisy chains consisting of both XC4000X and Virtex devices, Xilinx recommends that all Virtex-E/Virtex-II/Virtex-II Pro devices be grouped at the beginning of the serial daisy chain, with the XC4000X/Spartan devices following. For a serial daisy chain consisting only of Spartan-II/E and Virtex/E/II/II Pro devices, there are no restrictions on the order of the devices in the chain. However, there are restrictions on the total number of bits that an FPGA can pass to the downstream FPGAs in the daisy chain. For the limits of each FPGA family, see **Solution Record 8985** on the Xilinx Support webpage at:

support.xilinx.com/xlnx/xil_ans_display.jsp?iLanguageID=1&iCountryID=1&getPagePath=8985

If a Virtex-II Pro FPGA is placed as the Master and a non-Virtex-II Pro FPGA is placed as a slave, select a configuration CCLK speed supported by *all* devices in the chain.

The separate bitstreams for the FPGAs in a daisy chain must be combined into a single PROM file, by using either iMPACT or the PROMGen utility (see Appendix A, "BitGen and PROMGen Switches and Options"). Separate .bit files cannot be simply concatenated together to form a daisy-chain bitstream.

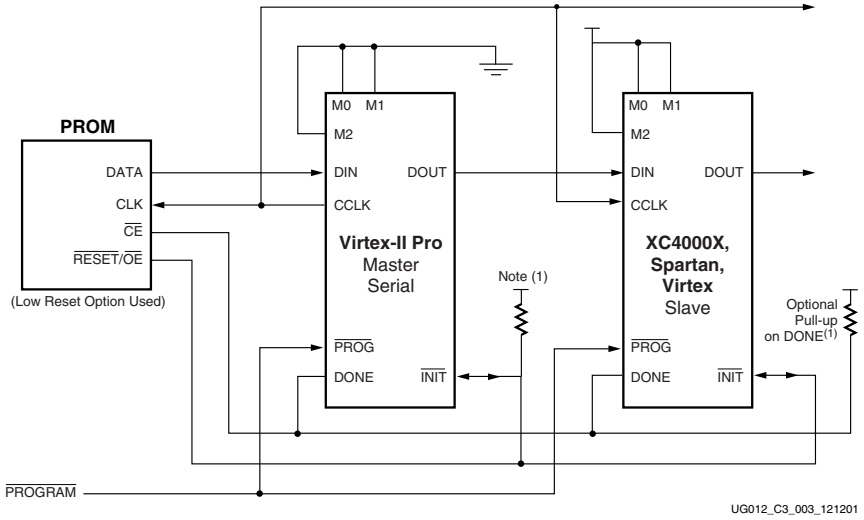


Figure 4-13: **Master/Slave Serial Mode Circuit Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 303 of 947

Notes:

1. If none of the devices have been selected to DriveDONE, then an external pull-up resistor of 330Ω should be added to the common DONE line. This pull-up resistor is not needed if DriveDONE = Yes. If used, DriveDONE should be selected only for the last device in the configuration chain.

The first device in the chain is the first to be configured. No data is passed onto the DOUT pin until all the data frames, start-up command, and CRC check have been loaded. CRC checks only include the data for the current device, not for any others in the chain. After finishing the first stream, data for the next device is loaded. The data for the downstream device appears on DOUT typically about 80 CCLK cycles after being loaded into DIN. This is due to internal packet processing. Each daisy-chained bitstream carries its own synchronization word. Nothing of the first bitstream is passed to the next device in the chain other than the daisy-chained configuration data.

The DONE_cycle must be set before GTS, or during the same cycle to guarantee each Virtex-II Pro device to move to the operation state when all the DONE pins have been released. When daisy-chaining multiple devices, either set the last device in the chain to DriveDONE, or add external pull-up resistors to counteract the combined capacitive loading on DONE. If non-Virtex devices are included in the daisy chain, it is important to set their bitstreams to SyncToDONE with BitGen options. For more information on Virtex BitGen options, see Appendix A, "BitGen and PROMGen Switches and Options."

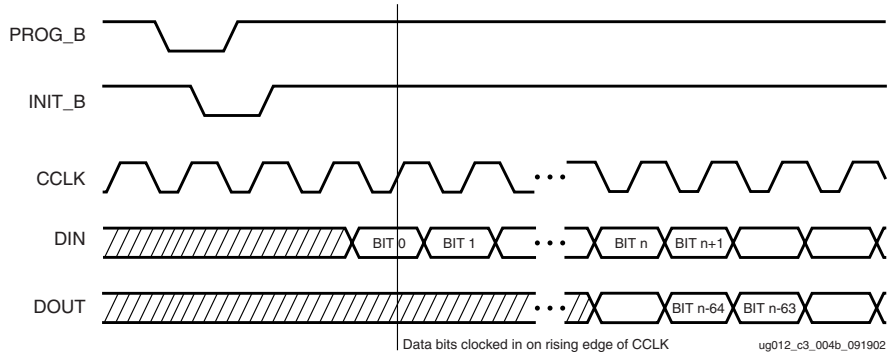


Figure 4-14: **Serial Configuration Clocking Sequence**

Notes:

1. For Slave configurations, a free running CCLK can be used, as shown in Figure 4-14.

Table 4-6: **Master/Slave Serial Mode Programming Switching**

	Description	Symbol	Values	Units
CCLK	DIN setup/hold, slave mode	T_{DCC}/T_{CCD}	5.0/0.0	ns, min
	DIN setup/hold, master mode	T_{DSCK}/T_{SCKD}	5.0/0.0	ns, min
	DOUT	T_{CCO}	12.0	ns, max
	High time	T_{CCH}	5.0	ns, min
	Low time	T_{CCL}	5.0	ns, min
	Maximum Frequency	F_{CC_SERIAL}	66	MHz, max
	Frequency Tolerance, master mode with respect to nominal		+45% -30%	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 304 of 947

Master SelectMAP Programming Mode

The SelectMAP mode provides an 8-bit bidirectional data bus interface to the Virtex-II Pro configuration logic that can be used for both configuration and readback. Virtex-II Pro devices can not be serially daisy-chained when the SelectMAP interface is used. However, they can be connected in a parallel-chain as shown in Figure 4-19. The DATA pins (D0:D7), CCLK, RDWR_B, BUSY, PROG_B, DONE, and INIT_B can be connected in common between all of the devices. CS_B inputs should be kept separate so each device can be accessed individually. If all devices are to be configured with the same bitstream, readback is not being used, and CCLK is less than F_{CC}_SelectMAP, the CS_B pins can be connected to a common line so the devices are configured simultaneously.

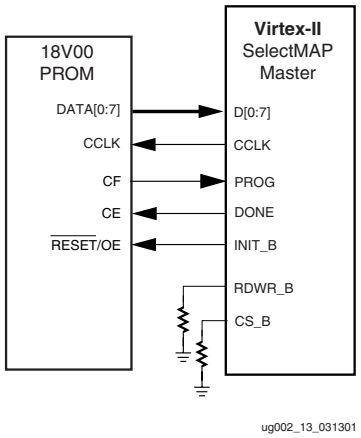


Figure 4-15: **Virtex-II Pro Device Interfaced With an 18V00 PROM**

Notes:

1. If none of the Virtex-II Pro devices have been selected to DriveDONE, add an external 330 Ω pull-up resistor to the common DONE line. This pull-up resistor is not needed if DriveDONE is selected. If used, DriveDONE should be selected only for the last device in the configuration chain.

The following pins are involved in Master SelectMAP configuration mode:

DATA Pins (D[0:7])

The D0 through D7 pins function as a bidirectional data bus in the SelectMAP mode. Configuration data is written to the bus, and readback data is read from the bus. The bus direction is controlled by the RDWR_B signal. See "Configuration Details," page 327. The D0 pin is considered the MSB of each byte.

RDWR_B

When asserted Low, the RDWR_B signal indicates that data is being written to the data bus. When High, the RDWR_B signal indicates that data is being read from the data bus.

CS_B

The Chip Select input (CS_B) enables the SelectMAP data bus. To write or read data onto or from the bus, the CS_B signal must be asserted Low. When CS_B is High, Virtex-II Pro devices do not drive onto or read from the bus.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 305 of 947

CCLK

The CCLK pin is a clock output in the Master SelectMAP interface. It synchronizes all loading and reading of the data bus for configuration and readback. The CCLK pin is driven by the FPGA.

Data Loading

To load data in the Master SelectMAP mode, a data byte is loaded on every rising CCLK edge as shown in Figure 4-16. If the CCLK frequency is less than F_{CC}_SelectMAP, this can be done without handshaking. For frequencies above F_{CC}_SelectMAP, the BUSY signal must be monitored. If BUSY is High, the current byte must be reloaded when BUSY is Low.

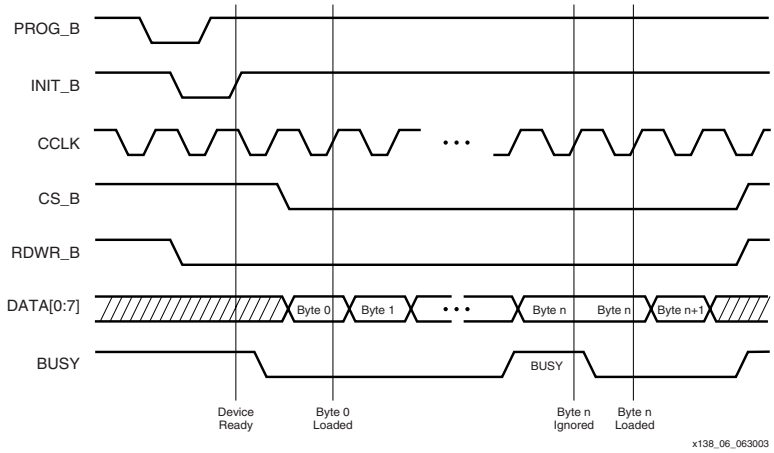


Figure 4-16: **Data Loading in SelectMAP**

The first byte can be loaded on the first rising CCLK edge that INIT_B is High, and when both CS_B and RDWR_B are asserted Low. CS_B and RDWR_B can be asserted anytime before or after INIT_B has gone High. However, the SelectMAP interface is not active until after INIT_B has gone High. The order of CS_B and RDWR_B does not matter, but RDWR_B must be asserted throughout configuration.

Extra processing time is needed when the bitstream is encrypted. Because of this, BUSY handshaking is required for encrypted bitstreams at a lower speed than for non-encrypted bitstreams. The maximum speed at which a Virtex-II/Virtex-II Pro device can be configured via SelectMAP without BUSY handshaking is 5 MHz.

Abort

An ABORT is an interruption in the SelectMAP configuration or readback sequence which occurs when the state of RDWR_B changes while CS_B is asserted. During a configuration ABORT, an 8-bit status word is driven onto the D[0:7] pins over the next four CCLK cycles. After the ABORT sequence finishes, the user may resynchronize the configuration logic and resume configuration. For applications that need to de-assert RDWR_B between bytes, see "Controlled CCLK," page 308.

ABORT Sequence Description

An ABORT is signaled during configuration as follows:

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 306 of 947

1. Configuration sequence begins normally.
2. User pulls the RDWR_B pin High while CS_B is still asserted (while device is selected).
3. BUSY will go High if CS_B remains asserted (Low). The FPGA will drive the status word onto the data pins if RDWR_B remains set for read control (logic High).
4. The ABORT ends when the CS_B signal is de-asserted.

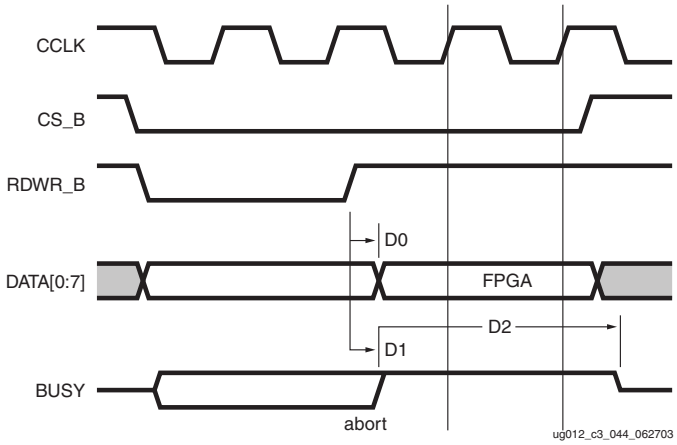


Figure 4-17: **Configuration Abort Sequence**

An ABORT is signaled during readback as follows:

1. Readback sequence begins normally.
2. User pulls the RDWR_B pin Low while CS_B is still asserted (while device is selected).
3. BUSY will go High if CS_B remains asserted (Low).

The ABORT ends when the CS_B signal is de-asserted.

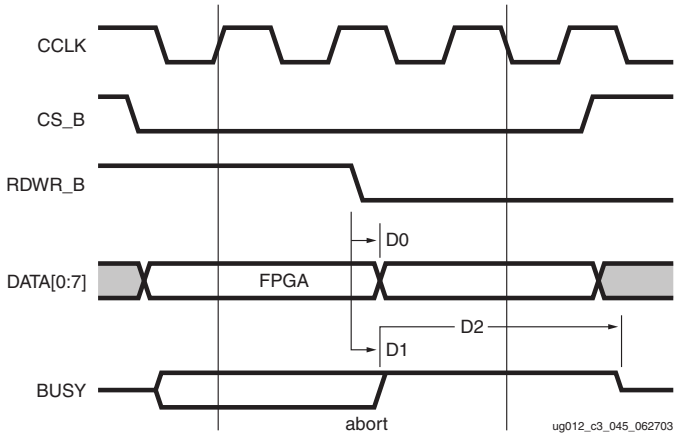


Figure 4-18: **Readback Abort Sequence**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 307/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 307 of 947

Note that ABORTs during readback will not be followed by a status word, since the RDWR_B signal is set for write control (logic Low).

ABORT Status Word

During the configuration ABORT sequence, the device drives a status word onto the D[0:7] pins. The key for that status word is as follows:

Table 4-7: **ABORT Status Word**

Bit Number	Status Bit Name	Meaning
D7	CFGERR_B	Configuration error (active Low) 0 = A configuration error has occurred. 1 = No configuration error.
D6	DALIGN	Sync word received (active High) 0= No sync word received. 1= Sync word received by interface logic.
D5	RIP	Readback in progress (active High) 0 = No readback in progress. 1 = A readback is in progress.
D4	IN_ABORT_B	ABORT in progress (active Low) 0 = Abort is in progress. 1 = No abort in progress.
D3-D0	1111	

The ABORT sequence lasts four CCLK cycles. During those cycles, the status word will change to reflect data alignment and ABORT status. A typical sequence would be:

```
11011111  => DALIGN = 1,  IN_ABORT_B = 1
11001111  => DALIGN = 1,  IN_ABORT_B = 0
10001111  => DALIGN = 0,  IN_ABORT_B = 0
10011111  => DALIGN = 0,  IN_ABORT_B = 1
```

After the last cycle, the synchronization word can be reloaded to establish data alignment.

Resuming Configuration

After the ABORT is completed (by de-asserting CS_B), the device must be re-synchronized. After resynchronizing, configuration may resume by sending the last configuration packet that was in progress when the ABORT occurred, or configuration can be restarted from the beginning.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 308 of 947

Slave SelectMAP Programming Mode

The SelectMAP mode provides an 8-bit bidirectional data bus interface to the Virtex-II Pro configuration logic that can be used for both configuration and readback. Virtex-II Pro devices can not be serially daisy-chained when the SelectMAP interface is used. However, they can be connected in a parallel-chain as shown in Figure 4-19. The DATA pins (D0:D7), CCLK, RDWR_B, BUSY, PROG_B, DONE, and INIT_B can be connected in common between all of the devices. CS_B inputs should be kept separate so each device can be accessed individually. If all devices are to be configured with the same bitstream, readback is not being used, and CCLK is less than $F_{CC_}$SelectMAP, the CS_B pins can be connected to a common line so the devices are configured simultaneously.

Although Figure 4-19 does not show a control module for the SelectMAP interface, the SelectMAP interface is typically driven by a processor, micro controller, or some other logic device such as an FPGA or a CPLD.

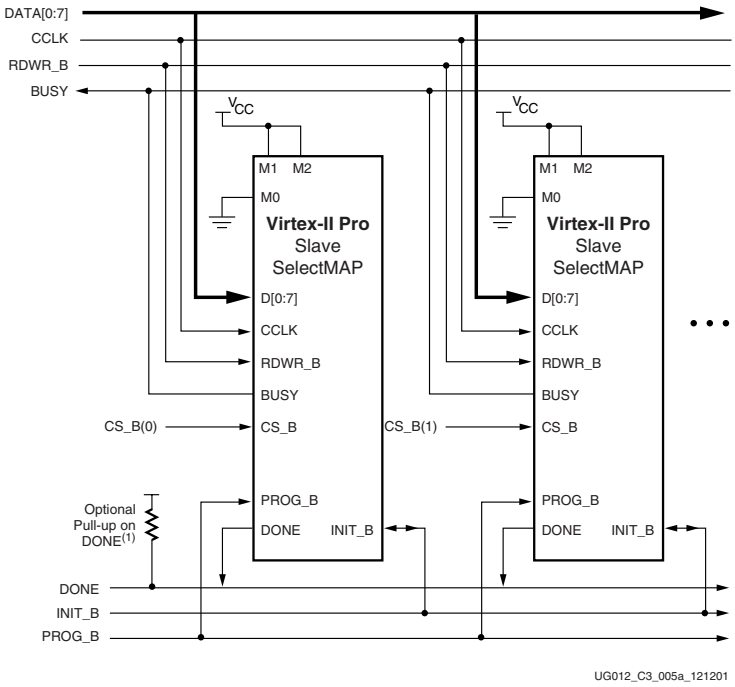


Figure 4-19: **Slave SelectMAP Mode Circuit Diagram**

Notes:

1. If none of the Virtex-II Pro devices have been selected to DriveDONE, add an external 330 Ω pull-up resistor to the common DONE line. This pull-up resistor is not needed if DriveDONE = Yes. If used, DriveDONE should be selected only for the last device in the configuration chain.

The following pins are involved in Slave SelectMAP configuration mode:

DATA Pins (D[0:7])

The D0 through D7 pins function as a bidirectional data bus in the SelectMAP mode. Configuration data is written to the bus, and readback data is read from the bus. The bus direction is controlled by the RDWR_B signal. See "Configuration Details," page 327. The D0 pin is considered the MSB of each byte.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 309 of 947

RDWR_B

When asserted Low, the RDWR_B signal indicates that data is being written to the data bus. When asserted High, the RDWR_B signal indicates that data is being read from the data bus.

CS_B

The Chip Select input (CS_B) enables the SelectMAP data bus. To write or read data onto or from the bus, the CS_B signal must be asserted Low. When CS_B is High, Virtex-II Pro devices do not drive onto or read from the bus.

BUSY

When CS_B is asserted, the BUSY output indicates when the FPGA can accept another byte. If BUSY is Low, the FPGA reads the data bus on the next rising CCLK edge where both CS_B and RDWR_B are asserted Low. If BUSY is High, the current byte is ignored and must be reloaded on the next rising CCLK edge when BUSY is Low. When CS_B is *not* asserted, BUSY is 3-stated.

BUSY is only necessary for CCLK frequencies above F_{CC}_SelectMAP. For frequencies at or below F_{CC}_SelectMAP, BUSY is ignored, see "Data Loading," page 302. For parallel chains, as shown in Figure 4-19, where the same bitstream is to be loaded into multiple devices simultaneously, BUSY should not be used. Thus, the maximum CCLK frequency for such an application must be less than F_{CC}_SelectMAP.

CCLK

Unlike the Master SelectMAP mode of configuration, the CCLK pin is an input in the Slave SelectMAP mode interface. The CCLK signal synchronizes all loading and reading of the data bus for configuration and readback. Additionally, the CCLK drives internal configuration circuitry. The CCLK can be driven either by a free running oscillator or an externally-generated signal.

Several scenarios exist when configuring the FPGA in SelectMAP mode, depending on the source of CCLK.

Free-Running CCLK

A free-running oscillator can be used to drive Virtex-II Pro CCLK pins. For applications that can provide a continuous stream of configuration data, refer to the timing diagram discussed in "Data Loading," page 302. For applications that cannot provide a continuous data stream, missing the clock edges, refer to the timing diagram discussed in "Non-Contiguous Data Strobe," page 307. An alternative to a free-running CCLK is discussed in "Controlled CCLK," page 308.

Express-Style Loading

In express-style loading, a data byte is loaded on every rising CCLK edge as shown in Figure 4-20. If the CCLK frequency is less than F_{CC}_SelectMAP, this can be done without handshaking. For frequencies above F_{CC}_SelectMAP, the BUSY signal must be monitored. If BUSY is High, the current byte must be reloaded when BUSY is Low.

The first byte can be loaded on the first rising CCLK edge that INIT_B is High, and when both CS_B and RDWR_B are asserted Low. CS_B and RDWR_B can be asserted anytime

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 310 of 947

before or after INIT_B has gone High. However, the SelectMAP interface is not active until after INIT_B has gone High. The order of CS_B and RDWR_B does not matter, but RDWR_B must be asserted throughout configuration. If RDWR_B is de-asserted before all data has been loaded, the FPGA aborts the operation. To complete configuration, the FPGA must be reset by PROG_B and reconfigured with the entire stream.

For applications that need to de-assert RDWR_B between bytes, see "Controlled CCLK," page 308.

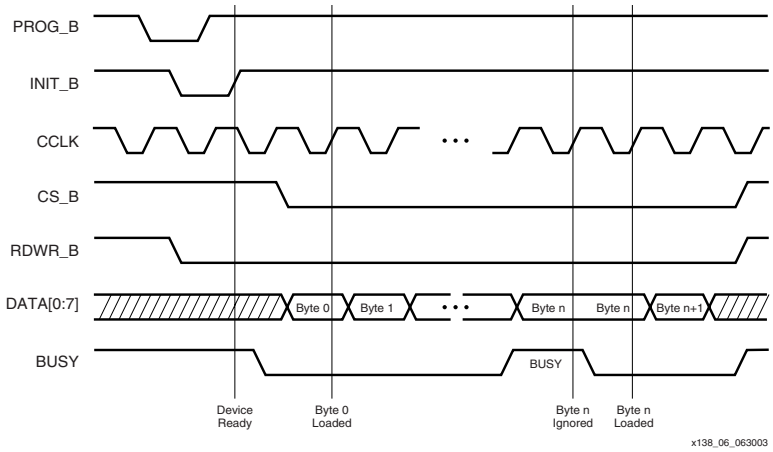


Figure 4-20: **"Express Style" Continuous Data Loading in SelectMAP**

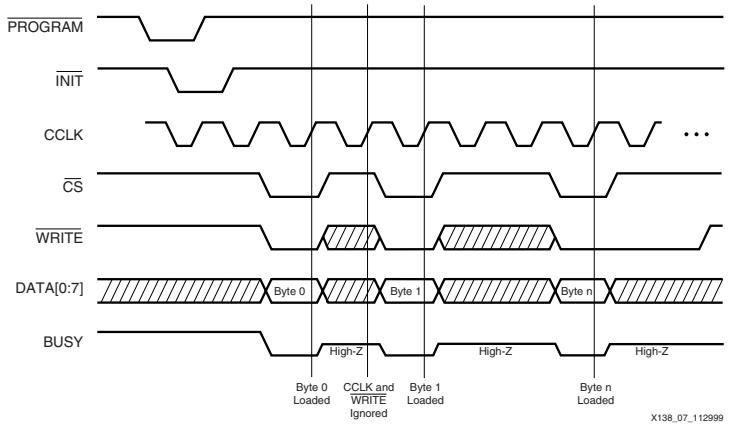


Figure 4-21: **Separating Data Loads by Multiple CCLK Cycles Using CS_B**

Non-Contiguous Data Strobe

In applications where multiple clock cycles might be required to access the configuration data before each byte can be loaded into the SelectMAP interface, data might not be ready for each consecutive CCLK edge. In such a case, the $\overline{CS\_B}$ signal can be de-asserted until the next data byte is valid on the DATA[0:7] pins. This is demonstrated in Figure 4-21. While CS_B is High, the SelectMAP interface does not expect any data and ignores all

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 311 of 947

CCLK transitions. However, RDWR_B must continue to be asserted while CS_B is asserted. If RDWR_B is High during a positive CCLK transition while $\overline{CS\_B}$ is asserted, the FPGA aborts the operation. For applications that need to de-assert the RDWR_B signal without de-asserting CS_B, see "Controlled CCLK.".

Controlled CCLK

Some applications require that RDWR_B be de-asserted between the loading of configuration data bytes asynchronously from the CS_B. Typically, this would be due to the RDWR_B signal being a common connection to other devices on the board, such as memory storage elements. In such a case, driving CCLK as a controlled signal instead of a free-running oscillator makes this type of operation possible. In Figure 4-22, the CCLK, CS_B, and RDWR_B are asserted Low while a data byte becomes active. Once the CCLK has gone High, the data is loaded. RDWR_B can be de-asserted and re-asserted as many times as necessary, just as long as it is Low before the next rising CCLK edge. When RDWR_B is de-asserted, regardless of CCLK, the data pins DATA[7:0] will be actively driven.

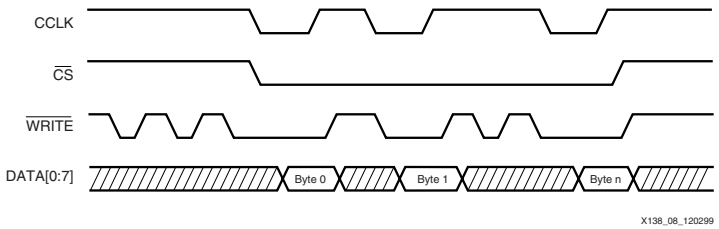


Figure 4-22: **Controlling CCLK for RDWR_B De-Assertion**

Table 4-8: **SelectMAP Write Timing Characteristics**

	Description	Symbol	Value	Units
CCLK	D_{0-7} Setup/Hold	T_{SMDCC}/T_{SMCCD}	5.0/0.0	ns, min
	CS_B Setup/Hold	T_{SMCSCC}/T_{SMCCCS}	7.0/0.0	ns, min
	RDWR_B Setup/Hold	T_{SMCCW}/T_{SMWCC}	7.0/0.0	ns, min
	BUSY Propagation Delay	T_{SMCKBY}	12.0	ns, max
	Maximum Frequency	$F_{CC\_SelectMAP}$	50	MHz, max
	Maximum Frequency with no handshake	F_{CCNH}	50	MHz, max

JTAG/ Boundary Scan Programming Mode

Introduction

Virtex-II Pro devices support the new IEEE 1532 standard for In-System Configuration (ISC), based on the IEEE 1149.1 standard. The IEEE 1149.1 Test Access Port and Boundary-Scan Architecture is commonly referred to as JTAG. JTAG is an acronym for the Joint Test Action Group, the technical subcommittee initially responsible for developing the standard. This standard provides a means to assure the integrity of individual components

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 312 of 947

and the interconnections between them at the board level. With increasingly dense multi-layer PC boards, and more sophisticated surface mounting techniques, boundary-scan testing is becoming widely used as an important debugging standard.

Devices containing boundary-scan logic can send data out on I/O pins in order to test connections between devices at the board level. The circuitry can also be used to send signals internally to test the device specific behavior. These tests are commonly used to detect opens and shorts at both the board and device level.

In addition to testing, boundary-scan offers the flexibility for a device to have its own set of user-defined instructions. The added common vendor specific instructions, such as configure and verify, have increased the popularity of boundary-scan testing and functionality.

Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1149.1

The Virtex-II Pro family is fully compliant with the IEEE Standard 1149.1 Test Access Port and Boundary-Scan Architecture. The architecture includes all mandatory elements defined in the IEEE 1149.1 Standard. These elements include the Test Access Port (TAP), the TAP controller, the instruction register, the instruction decoder, the boundary-scan register, and the bypass register. The Virtex-II Pro family also supports some optional instructions; the 32-bit identification register, and a configuration register in full compliance with the standard. Outlined in the following sections are the details of the JTAG architecture for Virtex-II Pro devices.

Test Access Port

The Virtex-II Pro TAP contains four mandatory dedicated pins as specified by the protocol (Table 4-9).

Table 4-9: **Virtex-II Pro TAP Controller Pins**

Pin	Description
TDI	Test Data In
TDO	Test Data Out
TMS	Test Mode Select
TCK	Test Clock

There are three input pins and one output pin to control the 1149.1 boundary-scan TAP controller. There are optional control pins, such as $\overline{\text{TRST}}$ (Test Reset) and enable pins, which might be found on devices from other manufacturers. It is important to be aware of these optional signals when interfacing Xilinx devices with parts from different vendors, because they might need to be driven.

The TAP controller is a 16-state state machine shown in Figure 4-23. The four mandatory TAP pins are outlined below.

- TMS - This pin determines the sequence of states through the TAP controller on the rising edge of TCK. TMS has an internal resistive pull-up to provide a logic High if the pin is not driven.
- TCK - This pin is the JTAG test clock. It sequences the TAP controller and the JTAG registers in the Virtex-II Pro devices.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 313/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 313 of 947

- TDI - This pin is the serial input to all JTAG instruction and data registers. The state of the TAP controller and the current instruction held in the instruction register determine which register is fed by the TDI pin for a specific operation. TDI has an internal resistive pull-up to provide a logic High to the system if the pin is not driven. TDI is applied into the JTAG registers on the rising edge of TCK.
- TDO - This pin is the serial output for all JTAG instruction and data registers. The state of the TAP controller and the current instruction held in the instruction register determine which register (instruction or data) feeds TDO for a specific operation. TDO changes state on the falling edge of TCK and is only active during the shifting of instructions or data through the device. This pin is 3-stated at all other times.

  Note: As specified by the IEEE Standard, the TMS and TDI pins all have internal pull-up resistors. These internal pull-up resistors of 50-150 kΩ are active, regardless of the mode selected.

For JTAG configuration mode, JTAG inputs are independent of V_{CCO} and work between 2.5V and 3.3V TTL levels (V_{IL} max = .8V, V_{IH} min = 2.0V). The JTAG input pins are 3.3V tolerant. The JTAG output (TDO) is an open-drain output and must be pulled up to the appropriate voltage level (typically 3.3V) through an external resistor. The value of the external pullup resistor depends on the capacitive loading on the TDO pin and the operating frequency, but it should not be less than 200Ω. The optimal TDO pullup value can be determined through IBIS simulation.

TAP Controller

Figure 4-23 diagrams a 16-state finite state machine. The four TAP pins control how data is scanned into the various registers. The state of the TMS pin at the rising edge of TCK determines the sequence of state transitions. There are two main sequences, one for shifting data into the data register and the other for shifting an instruction into the instruction register.

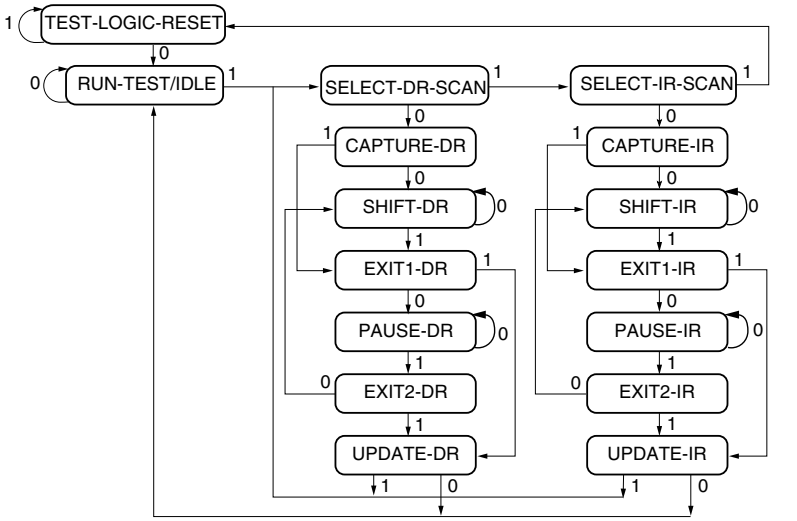


Figure 4-23: **State Diagram for the TAP Controller**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 314 of 947

Boundary-Scan Instruction Set

To determine the operation to be invoked, an instruction is loaded into the Instruction Register (IR). The length of the IR is device size specific. The IR is 10 bits wide on the XC2VP2, XC2VP4, and XC2VP7; 14 bits wide on the XC2VP20, XC2VP30, XC2VP40, XC2VP50, XC2VP70, and XC2VP100; and 22 bits wide on the XC2VP125. The bottom six bits of the instruction codes are the same for all devices sizes, to support the new IEEE Standard 1532 for In-System Configurable (ISC) devices. The additional IR bits for each instruction are 1's. Table 4-10 lists the available instructions for Virtex-II Pro devices.

Table 4-10: **Virtex-II Pro Boundary Scan Instructions for XC2VP2 through XC2VP7**

Boundary Scan Command	Binary Code (9:0)	Description
EXTEST	1111000000	Enables boundary-scan EXTEST operation
SAMPLE	1111000001	Enables boundary-scan SAMPLE operation
USER1	1111000010	Access user-defined register 1
USER2	1111000011	Access user-defined register 2
CFG_OUT	1111000100	Access the configuration bus for readback
CFG_IN	1111000101	Access the configuration bus for configuration
INTEST	1111000111	Enables boundary-scan INTEST operation
USERCODE	1111001000	Enables shifting out user code
IDCODE	1111001001	Enables shifting out of ID code
HIGHZ	1111001010	3-states output pins while enabling the bypass register
JSTART	1111001100	Clocks the start-up sequence when StartClk is TCK
JSHUTDOWN	1111001101	Clocks the shutdown sequence
BYPASS	1111111111	Enables BYPASS
JPROG_B	1111001011	Equivalent to and has the same affect as PROG_B
RESERVED	All other codes	Xilinx reserved instructions

The mandatory IEEE 1149.1 commands are supported in Virtex-II Pro devices, as well as several Xilinx vendor-specific commands. Virtex-II Pro devices have a powerful command set. The EXTEST, INTEST, SAMPLE/PRELOAD, BYPASS, IDCODE, USERCODE, and HIGHZ instructions are all included. The TAP also supports two internal user-defined registers (USER1 and USER2) and configuration/readback of the device. The Virtex-II Pro boundary-scan operations are independent of mode selection. The boundary-scan mode in Virtex-II Pro devices overrides other mode selections. For this reason, boundary-scan instructions using the boundary-scan register (SAMPLE/PRELOAD, INTEST, EXTEST) must not be performed during configuration. All instructions except USER1 and USER2 are available before a Virtex-II Pro device is configured. After configuration, all instructions are available.

JSTART and JSHUTDOWN are instructions specific to the Virtex-II Pro architecture and configuration flow. As described in Table 4-10, the JSTART and JSHUTDOWN instructions clock the startup sequence when the appropriate bitgen option is selected. The instruction does not work correctly without the correct bitgen option selected.

```
bitgen -g startupclk:jtagclk designName.ncd
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 315/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 315 of 947

For details on the standard boundary-scan instructions EXTEST, INTEST, and BYPASS, refer to the IEEE Standard. The user-defined registers (USER1/USER2) are described in "USER1, USER2 Registers," page 315.

Boundary-Scan Architecture

Virtex-II Pro device registers include all registers required by the IEEE 1149.1 Standard. In addition to the standard registers, the family contains optional registers for simplified testing and verification (Table 4-11).

Table 4-11: **Virtex-II Pro JTAG Registers**

Register Name	Register Length	Description
Instruction register	Device specific	Holds current instruction OPCODE and captures internal device status.
Boundary scan register	3 bits per I/O	Controls and observes input, output, and output enable.
Bypass register	1 bit	Device bypass.
Identification register	32 bits	Captures device ID.
JTAG configuration register	64 bits	Allows access to the configuration bus when using the CFG_IN or CFG_OUT instructions.
USERCODE register	32 bits	Captures user-programmable code

Boundary-Scan Register

The test primary data register is the boundary-scan register. Boundary-scan operation is independent of individual IOB configurations. Each IOB, bonded or un-bonded, starts as bidirectional with 3-state control. Later, it can be configured to be an input, output, or 3-state only. Therefore, three data register bits are provided per IOB (Figure 4-24).

When conducting a data register (DR) operation, the DR captures data in a parallel fashion during the CAPTURE-DR state. The data is then shifted out and replaced by new data during the SHIFT-DR state. For each bit of the DR, an update latch is used to hold the input data stable during the next SHIFT-DR state. The data is then latched during the UPDATE-DR state when TCK is Low.

The update latch is opened each time the TAP Controller enters the UPDATE-DR state. Care is necessary when exercising an INTEST or EXTEST to ensure that the proper data has been latched before exercising the command. This is typically accomplished by using the SAMPLE/PRELOAD instruction.

Consider internal pull-up and pull-down resistors when developing test vectors for testing opens and shorts. The boundary-scan mode determines if the IOB has a pull-up resistor. Figure 4-24 is a representation of Virtex-II Pro Boundary-Scan Architecture.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 316 of 947

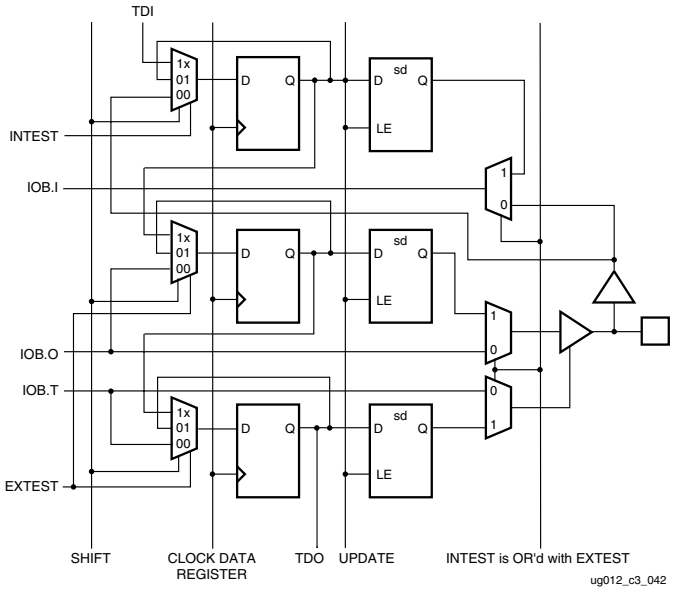


Figure 4-24: **Virtex Series Boundary Scan Logic**

Bit Sequence

The order in each non-TAP IOB is described in this section. The input is first, then the output, and finally the 3-state IOB control. The 3-state IOB control is closest to the TDO. The input-only pins contribute only the input bit to the boundary-scan I/O data register. The bit sequence of the device is obtainable from the "Boundary-Scan Description Language Files" (BSDL files) for the Virtex family. These files can be obtained from the Xilinx software download area. The bit sequence is independent of the design. It always has the same bit order and the same number of bits.

Bypass Register

The other standard data register is the single flip-flop BYPASS register. It passes data serially from the TDI pin to the TDO pin during a bypass instruction. This register is initialized to zero when the TAP controller is in the CAPTURE-DR state.

Instruction Register

The instruction register loads the OPCODE necessary for the Virtex-II Pro boundary-scan instruction set. This register loads the current OPCODE and captures internal device status. The width of this register is device size specific.

Configuration Register (Boundary-Scan)

The configuration register is a 64-bit register. This register allows access to the configuration bus and readback operations.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 317 of 947

Identification Register

Virtex devices have a 32-bit identification register, commonly referred to as the IDCODE register. This register is based upon IEEE Standard 1149.1 and allows easy identification of the part being tested or programmed via boundary scan.

Virtex-II Pro Identification Register

The Virtex-II Pro JTAG ID Code register has the following format.

```
3322 2222222 211111111 110000000000
1098 7654321 098765432 109876543210   <-- bit positions(00 to 31)
vvvv:fffffff:aaaaaaaaa:ccccccccccc1
```

where

- `v` is the revision code
- `f` is the 7-bit family code, `0001001` for Virtex-II Pro
- `a` is the number of array rows plus columns in the part, expressed in 9 bits:

XC2VP2 rows + columns	=	16 + 22	=	38	=	0x026
XC2VP4 rows + columns	=	40 + 22	=	62	=	0x03E
XC2VP7 rows + columns	=	40 + 34	=	74	=	0x04A
XC2VP20 rows + columns	=	56 + 46	=	102	=	0x066
XC2VP30 rows + columns	=	80 + 46	=	126	=	0x07E
XC2VP40 rows + columns	=	88 + 58	=	146	=	0x092
XC2VP50 rows + columns	=	88 + 70	=	158	=	0x09E
XC2VP70 rows + columns	=	104 + 82	=	186	=	0x0BA
XC2VP100 rows + columns	=	120 + 94	=	214	=	0x0D6
XC2VP125 rows + columns	=	136 + 106	=	242	=	0x0F2

`c` is the company code = `00001001001`. Since the last bit of the JTAG IDCODE is always one, the last three hex digits appear as `0x093`.

Examples of how the binary digits translate into hex codes appear in Table 4-12.

Table 4-12: **Example JTAG IDCODE Concatenation**

		vvvv	ffff	fffa	aaaa	aaaa	cccc	cccc	ccc1
XC2VP7	bin	<vvvv>	0001	0010	0100	1010	0000	1001	0011
	hex	<v>	1	2	4	A	0	9	3
XC2VP40	bin	<vvvv>	0001	0010	1001	0010	0000	1001	0011
	hex	<v>	1	2	9	2	0	9	3
XC2VP100	bin	<vvvv>	0001	0010	1101	0110	0000	1001	0011
	hex	<v>	1	2	D	6	0	9	3

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 318 of 947

ID Codes assigned to Virtex-II Pro FPGAs are shown in Table 4-13.

Table 4-13: **Virtex-II Pro Device ID Codes**

FPGA	IDCODE(1)	FPGA	IDCODE
XC2VP2	<v>1226093	XC2VP40	<v>1292093
XC2VP4	<v>123E093	XC2VP50	<v>129E093
XC2VP7	<v>124A093	XC2VP70	<v>12BA093
XC2VP20	<v>1266093	XC2VP100	<v>12D6093
XC2VP30	<v>127E093	XC2VP125	<v>12F2093

Notes:

1. The <v> in the IDCODE stands for the device's revision code (in hex).

USERCODE Register

USERCODE is supported in the Virtex family as well. This register allows a user to specify a design-specific identification code. The USERCODE can be programmed into the device and read back for verification at a later time. The USERCODE is embedded into the bitstream during bitstream generation (bitgen -g UserID option) and is valid only after configuration.

USER1, USER2 Registers

The USER1 and USER2 registers are only valid after configuration. These two registers must be defined by the user within the design. These registers can be accessed after they are defined by the TAP pins.

The BSCAN_VIRTEX2 library macro is required when creating these registers. This symbol is only required for driving internal scan chains (USER1 and USER2). The BSCAN_VIRTEX2 macro provides two user pins (SEL1 and SEL2) for determining usage of USER1 or USER2 instructions respectively. For these instructions, two corresponding pins (TDO1 and TDO2) allow user scan data to be shifted out of TDO. In addition, there are individual clock pins (DRCK1 and DRCK2) for each user register. There is a common input pin (TDI) and shared output pins that represent the state of the TAP controller (RESET, SHIFT, and UPDATE). Unlike earlier FPGA families that required the BSCAN macro to dedicate TAP pins for boundary scan, Virtex-II Pro TAP pins are dedicated and do not require the BSCAN_VIRTEX2 macro for normal boundary-scan instructions or operations.

Note that these are user-defined registers. The example (Figure 4-25) is one of many implementations. For HDL, the BSCAN_VIRTEX2 macro needs to be instantiated in the design.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 319 of 947

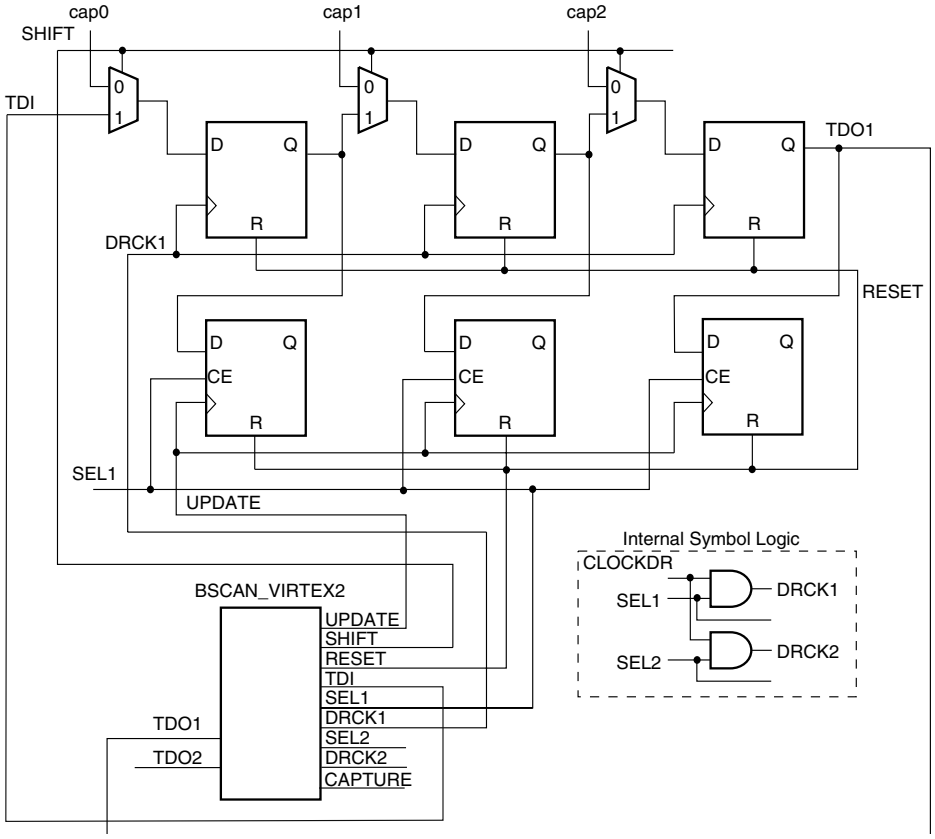


Figure 4-25: **BSCAN_VIRTEX2 (Example Usage)**

Using Boundary Scan in Virtex-II Pro Devices

Characterization data for some of the most commonly requested timing parameters shown in Figure 4-26 is listed in Table 4-14.

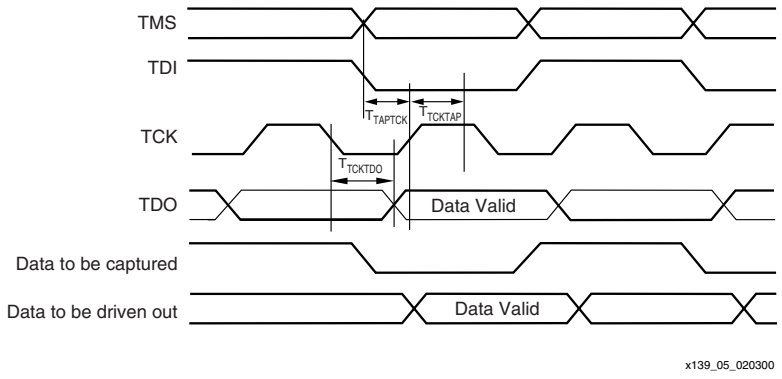


Figure 4-26: **Virtex-II Pro Boundary Scan Port Timing Waveforms**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 320 of 947

Table 4-14: **Boundary-Scan Port Timing Specifications**

Symbol	Parameter	Value	Units
T_{TAPTCK}	TMS and TDI setup time before TCK	4.0	ns, min
T_{TCKTAP}	TMS and TDI hold times after TCK	2.0	ns, min
T_{TCKTDO}	TCK falling edge to TDO output valid	11.0	ns, min
F_{TCK}	Maximum TCK clock frequency	33.0	MHz, max

For further information on the Startup sequence, bitstream, and internal configuration registers referenced here, refer to "Readback," page 337.

Configuring Through Boundary-Scan

One of the most common boundary-scan vendor-specific instructions is the configure instruction. An individual Virtex-II Pro device is configured via JTAG on power-up using TAP. If the Virtex-II Pro device is configured on power-up, it is advisable to tie the mode pins to the boundary-scan configuration mode settings; 101 (M2 = 1, M1 = 0, M0 = 1).

Configuration flow for Virtex-II Pro device configuration with JTAG is shown in Figure 4-27. The sections that follow describe how the Virtex-II Pro device can be configured as a single device via boundary-scan or as part of a multiple-device scan chain.

A configured device can be reconfigured by toggling the TAP and entering a CFG_IN instruction after pulsing the PROG_B pin or issuing the shut-down sequence. (Refer to "Power Up," page 284). For additional details on power-up or the start-up sequence in Virtex-II Pro devices, see "Device Startup," page 285.

Customers who wish to implement the Virtex-II Pro JTAG COnfiguration algorithm are encouraged to use the SVF-based flow provided in Xilinx Application Note XAPP058.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 321 of 947

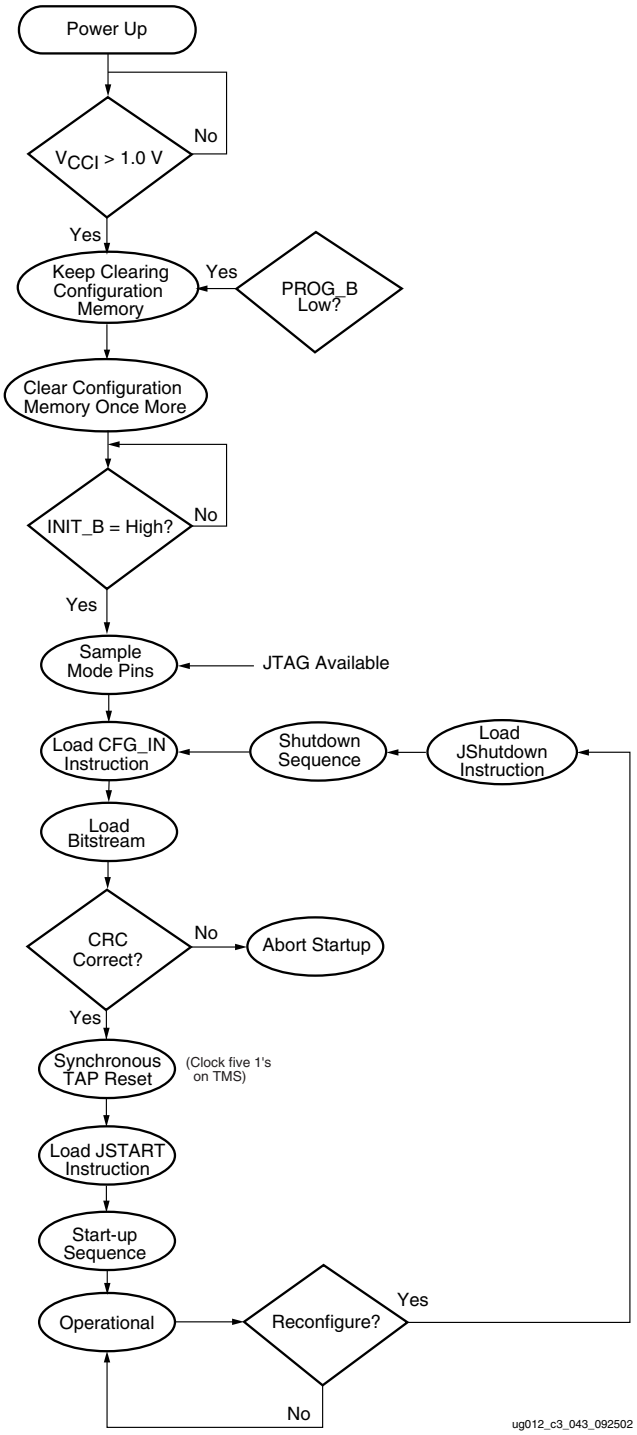


Figure 4-27: **Device Configuration Flow Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 322 of 947

Single Device Configuration

Configure a Virtex-II Pro part as a single device via boundary-scan operations as follows. Ensure that the bitstream is generated with the JTAG clock option:

```
bitgen -g startupclk:jtagclk <designName>.ncd
```

Also, when using iMPACT software, verify that the most current version is being used.

Table 4-15 describes the TAP controller commands required to configure a Virtex-II Pro device. Refer to Figure 4-23 for TAP controller states. These TAP controller commands are issued automatically if configuring the part with the iMPACT software.

Table 4-15: **Single Device Configuration Sequence**

TAP Controller Step and Description		Set & Hold		# of Clocks
		TDI	TMS	TCK
1.	On power-up, place a logic "one" on the TMS and clock the TCK five times. This ensures starting in the TLR (Test-Logic-Reset) state.	X	1	5
2.	Move into the RTI state.	X	0	1
3.	Move into the SELECT-IR state.	X	1	2
4.	Enter the SHIFT-IR state.	X	0	2
5.	Start loading the CFG_IN instruction, LSB first: XC2VP2 → XC2VP7: XC2VP20 → XC2VP100: XC2VP125:	 111_000101 111_1111_000101 111_1111_1111_1111_000101	 0 0 0	 9 13 21
6.	Load the MSB of CFG_IN instruction when exiting SHIFT-IR, as defined in the IEEE standard.	1	1	1
7.	Enter the SELECT-DR state.	X	1	2
8.	Enter the SHIFT-DR state.	X	0	2
9.	Shift in the Virtex-II Pro bitstream. Bit_n (MSB) is the first bit in the bitstream(1).	$bit_1 \ldots bit_n$	0	(bits in bitstream)-1
10.	Shift in the last bit of the bitstream. Bit_0 (LSB) shifts on the transition to EXIT1-DR.	bit_0	1	1
11.	Enter UPDATE-DR state.	X	1	1
12.	Reset TAP by clocking five 1's on TMS	X	1	5
13.	Enter the SELECT-IR state.	X	1	2
14.	Move to the SHIFT-IR state.	X	0	2

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 323 of 947

Table 4-15: **Single Device Configuration Sequence *(Continued)***

TAP Controller Step and Description		Set & Hold		# of Clocks
		TDI	TMS	TCK
15.	Start loading the JSTART instruction. The JSTART instruction initializes the startup sequence. XC2VP2 → XC2VP7: XC2VP20 → XC2VP100: XC2VP125:	 111_01100 111_1111_01100 111_1111_1111_1111_01100	0	5
16.	Load the last bit of the JSTART instruction.	0	1	1
17.	Move to the UPDATE-IR state.	X	1	1
18.	Move to RTI and clock the STARTUP sequence by applying a minimum of 12 clock cycles to the TCK.	X	0	12
19.	Move to the TLR state. The device is now functional.	X	1	3

Notes:

1. In the Configuration Register, data is shifted in from the right (TDI) to the left (TDO).

Multiple Device Configuration

It is possible to configure multiple Virtex-II Pro devices in a chain. The devices in the JTAG chain are configured one at a time. The multiple device configuration steps can be applied to any size chain. Ensure the bitstream is generated with the JTAG clock option:

```
bitgen -g startupclk:jtagclk <designName>.ncd
```

Refer to the State Diagram in Figure 4-23 for the following TAP controller steps.

1. On power-up, place a logic "one" on the TMS and clock the TCK five times. This ensures starting in the TLR (Test-Logic-Reset) state.
2. Load the CFG_IN instruction into the target device (and BYPASS in all other devices).Go through RTI (RUN-TEST/IDLE).
3. Load in the configuration bitstream per step 7 through step 11 in Table 4-15.
4. Repeat step 2 and step 3 for each device.
5. Reset all TAPs by clocking five 1's on TMS.
6. Load the JSTART command into all devices.
7. Go to RTI and clock TCK 12 times.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 324 of 947

All devices are active at this point.

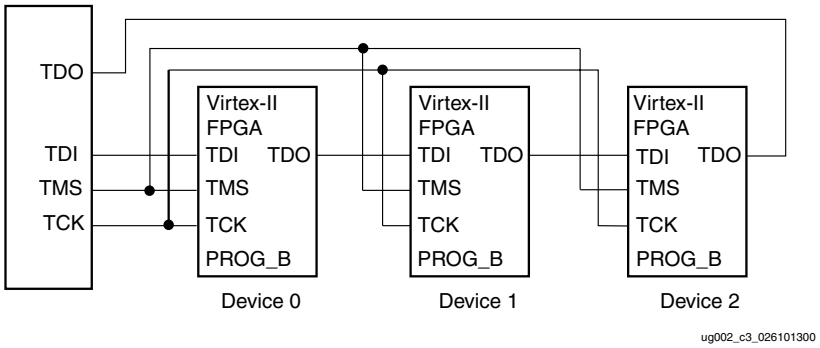


Figure 4-28: **Boundary Scan Chain of Devices**

Notes:

1. PROG_B pin should be deasserted during JTAG operation.

Reconfiguring Through Boundary Scan

The ability of Virtex-II Pro devices to perform partial reconfiguration is the reason that the configuration memory is not cleared when reconfiguring the device. When reconfiguring a chain of devices, refer to step 3 in Table 4-15. There are two methods to reconfigure Virtex-II Pro devices without possible internal contention. The first method is to pulse the PROG_B pin which resets the internal configuration memory. The alternate method is to perform a shutdown sequence, placing the device in a safe state. The following shutdown sequence includes using internal registers. (For details on internal registers, refer to "Readback," page 337.)

1. Load the CFG_IN instruction.
2. In SHIFT-DR state, load the synchronization word followed by the Reset CRC Register (RCRC) command.

```
1111 1111 1111 1111 1111 1111 1111 1111-> Dummy word
1010 1010 1001 1001 0101 0101 0110 0110-> Synchronization word
0011 0000 0000 0000 1000 0000 0000 0001-> Header: Write to CMD register
0000 0000 0000 0000 0000 0000 0000 0111-> RCRC command
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
```

3. Load JSHUTDOWN.
4. Go to RTI and clock TCK at least 12 times to clock the shutdown sequence.
5. Proceed to SHIFT-IR state and load the CFG_IN instruction again.
6. Go to SHIFT-DR state and load the configuration bits. Make sure the configuration bits contain AGHIGH command, which asserts the global signal GHIGH_B. This prevents contention while writing configuration data.

```
0011 0000 0000 0000 1000 0000 0000 0001-> Header: Write to CMD
0000 0000 0000 0000 0000 0000 0000 1000-> AGHIGH command asserts
                                          GHIGH_B
```

7. When all configuration bits have been loaded, reset the TAP by clocking five 1's on TMS.
8. Go to SHIFT-IR state and load the JSTART instruction.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 325 of 947

9. Go to RTI and clock TCK at least 12 times to clock the startup sequence.
10. Go to TLR state to complete the reconfiguration process.

Debugging Configuration

To verify successful configuration, there are several options. Some of the most helpful verification steps include using TAP pins and the readback command. Using the Virtex-II Pro TAP controller and status pins is discussed first.

When using TAP controller pins, TDO is driven only in the SHIFT-DR and SHIFT-IR state. If the output of the TDO can be changed via an external pull-up resistor, the TAP is not in SHIFT-IR or SHIFT-DR. If the TAP can be controlled precisely, use this to test the application.

In JTAG configuration, the status pin (DONE) functions the same as in the other configuration modes. The DONE pin can be monitored to determine if a bitstream has been completely loaded into the device. If DONE is Low, the entire bitstream has not been sent or the start-up sequence is not finished. If DONE is High, the entire bitstream has been received correctly. The INIT_B pin functions similar to a normal INIT_B but does not indicate a configuration error in boundary-scan configuration.

In addition to external pin monitoring, an internal test can be conducted. The second method includes the following steps to capture the internal device status register contents:

1. Move the TAP to TLR state.
2. Go to SHIFT-IR state and load in the CFG_IN instruction.
3. Go to SHIFT-DR state and shift in the following 64-bit pattern with the MSB (left-most bit), shifted in first.

```
1111 1111 1111 1111 1111 1111 1111 1111-> Dummy word
1010 1010 1001 1001 0101 0101 0110 0110-> Synchronization word
0010 1000 0000 0000 1110 0000 0000 0010-> Read STATus Register 1)
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
```

> ***Note:*** Since the JTAG readback shift register is 64-bit long, two 32-bit words are needed to fill the shift register.

4. After shifting in the pattern, load the CFG_OUT instruction in the SHIFT-IR state.
5. Move to SHIFT-DR state and clock TCK 32 times while reading TDO. The data seen on TDO is the content of the status register. The last bit out is a one if a CRC error occurred. If successful, it should read as follows.

```
0000 0000 0000 0000 0001 1MMM 1110 11101(a,b)
```

> ***Notes:***
> a.*MMM* is the mode pins value.
> b.Assuming that the device is in normal operation mode.

Since the read status activity causes the crc_error status to be asserted, it is important to clear the crc_error status to ensure normal device operation. This can be done by writing the precalculated CRC value to the CRC register or writing an RCRC command.

6. Go to SHIFT-IR state and load the CFG_IN instruction again.
7. Move to SHIFT-DR state and shift in the following bit pattern:

```
0011 0000 0000 0000 1000 0000 0000 0001-> Header: Write to CMD register
0000 0000 0000 0000 0000 0000 0000 0111-> RCRC command
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 326 of 947

```
0000 0000 0000 0000 0000 0000 0000 0000-> flush pipe
```

8. Put the TAP in TLR state when finished.

The device status register also gives the status of the DONE and INIT_B signals. For information on the status register, refer to Figure 4-33.

Boundary-Scan for Virtex-II Pro Devices Using IEEE Standard 1532

ISC Modal States

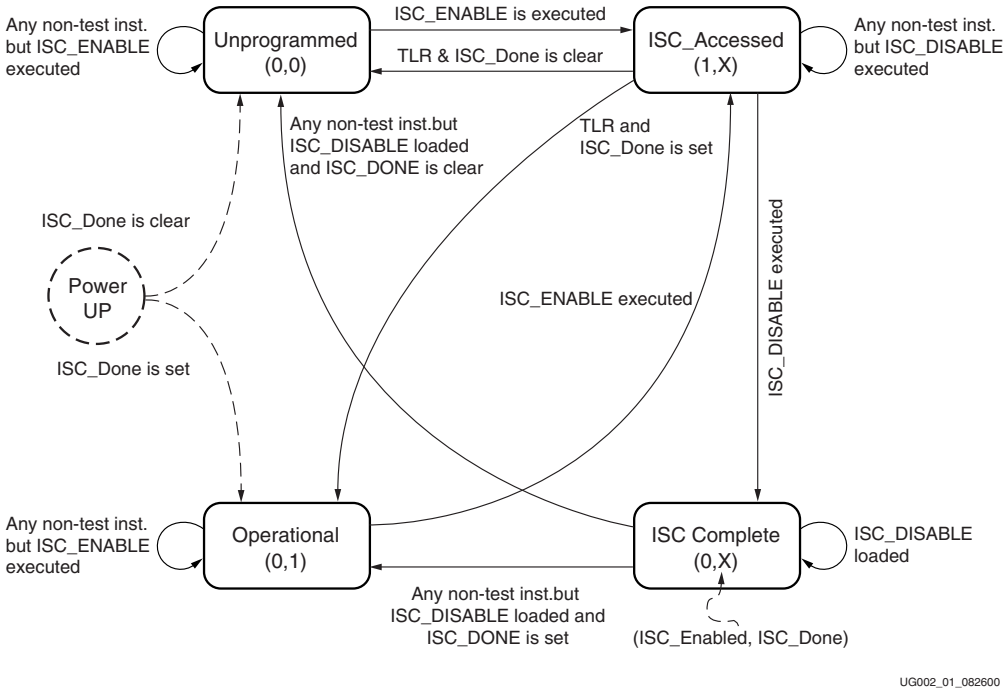


Figure 4-29: **ISC Modal States**

Once the device is powered up, it goes to an Unprogrammed state. The I/Os are all either 3-stated or pulled up. When ISC_ENABLE is successfully executed, the ISC_Enabled signal is asserted, and the device moves to ISC_Accessed state. When the device moves to ISC_Accessed state from Operational state, the shutdown sequence is executed. The I/Os are all either 3-stated or pulled up.

The StartUp sequence is executed when in the ISC_Accessed state. At the end of the StartUp Sequence, ISC_Enabled is cleared and the device moves to ISC_Complete. The minimum clock cycle requirement is the number of clock cycles required to complete the StartUp sequence. At the completion of the minimum required clock cycles, ISC_Enabled is deasserted.

Whether the StartUp sequence is successful or not is determined by CRC or configuration error status from the configuration processor. If the startup is completed, ISC_Done is asserted; otherwise, ISC_Done stays Low. The I/Os are either 3-stated or pulled up.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 327/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 327 of 947

When ISC_Done is set in ISC_Complete state, the device moves to the Operational state. Otherwise, if ISC_Done is clear, the device moves to an Unprogrammed state. However, if the TAP controller goes to TLR state while the device is in ISC_Accessed state and if ISC_Done is set, then the device moves to the Operational state. However, the I/O is not active yet because the Startup sequence has not been performed. The Startup sequence has to be performed in the Operational state to bring the I/O active.

Clocking Startup and Shutdown Sequence (JTAG Version)

There are three clock sources for Startup and Shutdown sequence, CCLK, UserCLK, and JTAGCLK. Clock selection is set by bitgen. The Startup sequence is executed in ISC_Accessed state. When it is clocked by JTAGCLK, the Startup sequence receives the JTAGCLK in TAP Run/Test Idle state while ISC_DISABLE is the current JTAG instruction. The number of clock cycles in Run/Test Idle state for successful completion of ISC_DISABLE is determined by the number of clock cycles needed to complete the Startup sequence.

When UserCLK or CCLK is used to clock the Startup sequence, the user should know how many JTAGCLK cycles should be spent in Run/Test Idle to successfully complete the Startup sequence.

The Shutdown sequence is executed when the device transitions from an Operational to ISC_Accessed state. Shutdown is done while executing the ISC_ENABLE instruction. When the Shutdown sequence is clocked using JTAGCLK, the clock is supplied in the Run/Test Idle state of the ISC_ENABLE instruction. The number of clock cycles in Run/Test Idle is determined by the number of clock cycles needed to complete the Shutdown sequence.

When the Shutdown sequence is clocked by CCLK or UserCLK, the user is responsible for knowing how many JTAGCLK cycles in Run/Test Idle are needed to complete the Shutdown sequence.

Notes:

1. It has been decided that when configuring the device through JTAG, the startup and shutdown clock should come from TCK, regardless of the selection in bitgen.
2. In IEEE 1532 configuration mode, Startup and Shutdown clock source is always TCK.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 328 of 947

Configuration Flows Using JTAG

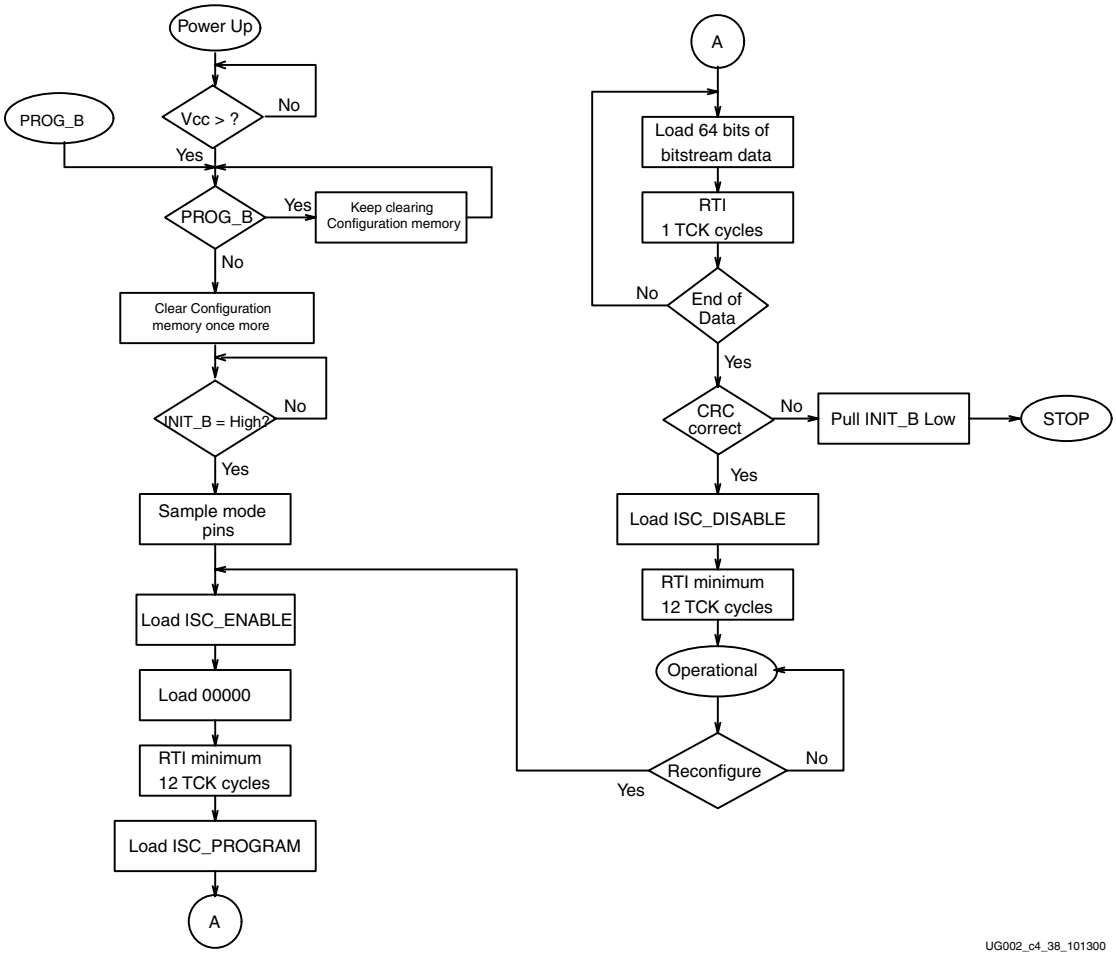


Figure 4-30: **IEEE 1532 Configuration Flow**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 329 of 947

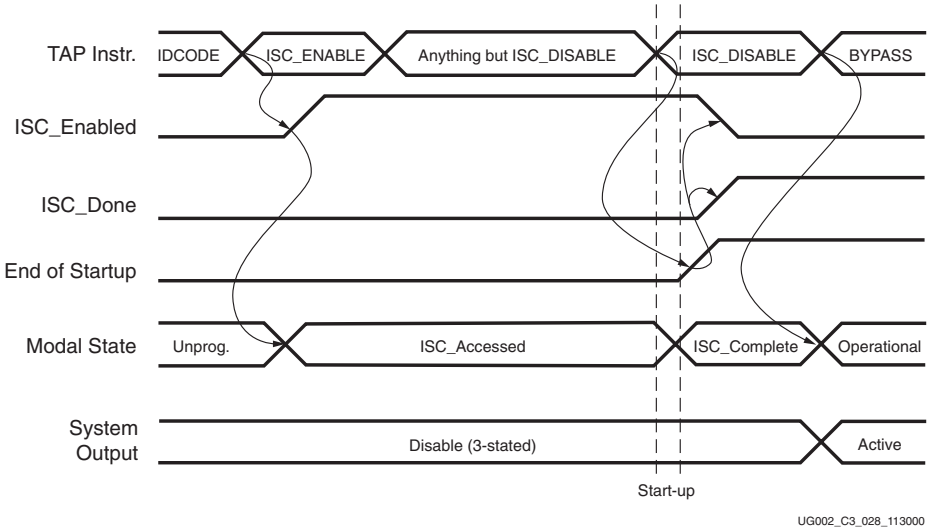


Figure 4-31: **Signal Diagram for Successful First Time ISC Configuration**

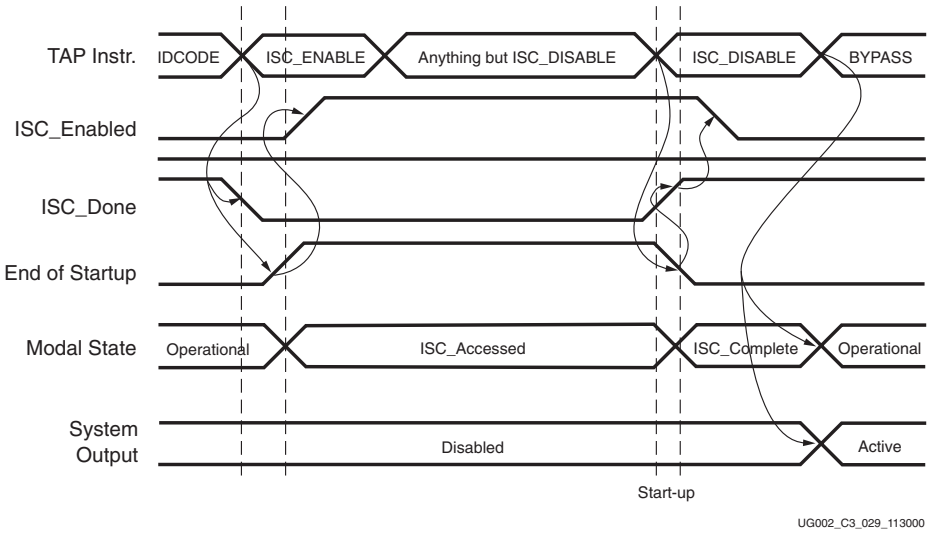


Figure 4-32: **Signal Diagram for Successful ISC Partial and Full Reconfiguration**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 330 of 947

Configuration Details

This section provides a bit-level understanding of the configuration stream. For the purpose of debugging, designing embedded readback operations, or otherwise complex styles of configuring multiple FPGAs, the Virtex-II bitstream, internal configuration logic, and internal processing of configuration data are described here.

Data Frames

The internal configuration memory is partitioned into segments called "Frames." The portions of the bitstream that actually get written to the configuration memory are "Data Frames." The number and size of frames varies with device size as shown in Table 4-16. The total number of configuration bits for a particular device is calculated by multiplying the number of frames by the number of bits per frame, and then adding the total number of bits needed to perform the configuration register writes shown in Table 4-22.

Table 4-16: **Virtex-II Pro Configuration Data Frames and Programming Times**

Device	No. of Frames	Frame Length in Bits	Configuration Bits	Total No. of Bits (including Header)	Approx. SelectMAP Download Time (50 MHz) ms	Approx. Serial Download Time (50 MHz) ms	Approx. JTAG Download Time (33 MHz) ms
XC2VP2	884	1,472	1,301,248	1,305,440	3.26	26.11	39.56
XC2VP4	884	3,392	2,998,528	3,006,560	7.52	60.13	91.11
XC2VP7	1,320	3,392	4,477,440	4,485,472	11.21	89.71	135.92
XC2VP20	1,756	4,672	8,204,032	8,214,624	20.54	164.29	248.93
XC2VP30	1,756	6,592	11,575,552	11,589,984	28.97	231.80	351.21
XC2VP40	2,192	7,232	15,852,544	15,868,256	39.67	317.37	480.86
XC2VP50	2,628	7,232	19,005,696	19,021,408	47.55	380.43	576.41
XC2VP70	3,064	8,512	26,080,768	26,099,040	65.24	521.98	790.88
XC2VP100	3,500	9,792	34,272,000	34,292,832	85.73	685.86	1,039.18
XC2VP125	3,936	11,072	43,579,392	43,602,784	109.00	872.06	1,321.30

Configuration Registers

The Virtex-II Pro configuration logic was designed so that an external source can have complete control over all configuration functions by accessing and loading addressed internal configuration registers over a common configuration bus. The internal configuration registers that are used for configuration and readback are listed in Table 4-17. All configuration data, except the synchronization word and dummy words, is written to internal configuration registers.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 331 of 947

Table 4-17: **Internal Configuration Registers**

Symbol	Register Name	Address
CRC	CRC Register	00000
FAR	Frame Address Register	00001
FDRI	Frame Data Input Register (Write Configuration Data)	00010
FDRO	Frame Data Output Register (Readback Configuration Data)	00011
CMD	Command Register	00100
CTL	Control Register	00101
MASK	Masking Register for CTL	00110
STAT	Status Register	00111
LOUT	Legacy Output Register (DOUT for daisy chain)	01000
COR	Configuration Option Register	01001
MFWR	Multiple Frame Write	01010
FLR	Frame Length Register	01011
IDCODE	Product ID Code Register	01110

Command Register (CMD)

Commands shown in Table 4-18 are executed by loading the binary code into the CMD register.

Table 4-18: **CMD Register Commands**

Symbol	Command	Binary Code
WCFG	Write Configuration Data	0001
MFWR	Multi-Frame Write	0010
DGHIGH	De-asserts GHIGH	0011
RCFG	Read Configuration Data	0100
START	Begin STARTUP Sequence	0101
RCAP	Reset CAPTURE (after Single-Shot Capture)	0110
RCRC	Reset CRC Register	0111
AGHIGH	Assert GHIGH	1000
SWITCH	Switch CCLK Frequency	1001
GRESTORE	Pulse GRESTORE Signal	1010
SHUTDOWN	Begin SHUTDOWN Sequence	1011
GCAPTURE	Pulse GCAPTURE Signal (one shot)	1100
DESYNCH	Forces realignment to 32 bits	1101

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 332 of 947

Frame Length Register (FLR)

The FLR is used to indicate the frame size to the internal configuration logic. This allows the internal configuration logic to be identical for all Virtex-II Pro devices. The value loaded into this register is the number of actual configuration words that get loaded into the configuration memory frames.

Configuration Option Register (COR)

The COR is loaded with the user selected options from bitstream generation. See Appendix A, "BitGen and PROMGen Switches and Options."

Table 4-19: **Configuration Option Register**

Name	Description	Bits
CRC_BYPASS	Does not check against updated CRC value.	29
SHUT_RST_DCI	DCI resets if SHUTDOWN and AGHIGH are performed.	27
SHUT_RST_DCM	DCM resets if SHUTDOWN and AGHIGH are performed.	26
DONE_PIPE	Add pipeline stage to DONEIN.	25
DRIVE_DONE	DONE pin is an active driver, not open drain.	24
SINGLE	Readback capture is one shot.	23
OSCFSEL	Select CCLK frequency in Master Serial Mode.	22:17
SSCLKSRC	Select STARTUP block clock source.	16:15
DONE_CYCLE	Startup cycle when DONE is asserted/de-asserted.	14:12
MATCH_CYCLE	Stall in this Startup cycle until DCI match signals are asserted.	11:9
LOCK_CYCLE	Stall in this Startup cycle until DCM signals are asserted.	8:6
GTS_CYCLE	Startup cycle when GTS_CFG_B is de-asserted.	5:3
GWE_CYCLE	Startup cycle when GWE is asserted.	2:0

Control Register (CTL)

The CTL controls internal functions such as *Security* and *Port Persistence*.

Table 4-20: **Control Register**

Name	Description	Bits
SBITS	Security level.	4:5
PERSIST	Configuration ports remain after configuration.	3
Reserved	For internal use.	2:1
GTS_USR_B	Active Low global 3-state I/Os. Turns off pullups if GTS_CFG_B is also asserted.	0

Mask Register (MASK)

The MASK is a safety mechanism that controls which bits of the CTL register can be reloaded. Prior to loading new data into the CTL register, each bit must be independently enabled by its corresponding bit in the MASK register. Any CTL bit not selected by the MASK register is ignored when reloading the CTL register.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 333 of 947

Frame Address Register (FAR)

The FAR sets the starting frame address for the next configuration data input write cycle.

Frame Data Register Input (FDRI)

The FDRI is the input stage for configuration data frames to be stored in the configuration memory. Starting with the frame address specified in the FAR, the FDRI writes its contents to the configuration memory frames. The FDRI automatically increments the frame address after writing each frame for the number of frames specified in the FDRI write command. This is detailed in the next section.

CRC Register (CRC)

The CRC is loaded with a CRC value that is embedded in the bitstream and compared against an internally calculated CRC value. Resetting the CRC register and circuitry is controlled by the CMD register.

Frame Data Register Output (FDRO)

FDRO is an output stage for reading frame data from the configuration memory during readback. This works the same as the FDRI but with data flowing in the other direction.

Legacy Data Output Register (LOUT)

LOUT is pipeline data to be sent out the DOUT pin for serially daisy-chained configuration data output.

Status Register (STAT)

The STAT register contains bits that indicate the state of the device. Such bits include the status of error pins, global signals, the DCM, and DCI. This register is read-only and can be read using the JTAG or SelectMAP port for debugging purposes.

														RESERVED	RESERVED	ID_ERROR	DONE	INIT_B	MODE			GHIGH_B	GWE	GTS_CFG_B	IN_ERROR	DCI_MATCH	DCM_LOCK	RESERVED	CRC_ERROR		
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x

Figure 4-33: **Status Register Fields**

Table 4-21: **Status Register**

Name	Description	Bit Location
ID_ERROR	IDCODE not validated while trying to write FDRI	13
DONE	DONEIN input form DONE pin	12
INIT_B	Value of CFG_RDY (INIT_B)	11
MODE	Value or MODE pins (M2, M1, M0)	10:8
GHIGH_B	Status of GHIGH	7

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 334 of 947

Table 4-21: **Status Register *(Continued)***

Name	Description	Bit Location
GWE	Status of GWE	6
GTS_CFG_B	Status of GTS_CFG_B	5
IN_ERROR	Legacy input error	4
DCI_MATCH	DCI matched	3
DCM_LOCK	DCM matched	2
Reserved	For internal use	1
CRC_ERROR	CRC error	0

Configuration Data Processing Flow

The complete (standard) reconfiguration of a Virtex-II device follows the internal flow shown in Figure 4-34. All associated configuration commands are listed in Table 4-22.

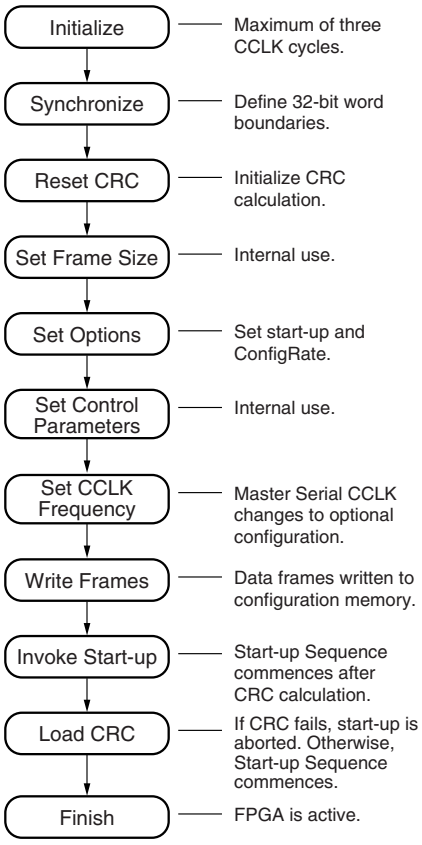


Figure 4-34: **Internal Configuration Processing Flow**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 335 of 947

Table 4-22: **Configuration Register Writes**

Type	Number of 32-bit Words
Command Set 1	
Dummy words	1
Synchronization word	1
Write CMD (RCRC)	2
Write FLR	2
Write COR	2
Write ID	2
Write MASK	2
Write CMD (SWITCH)	2
Command Set 2	
Write FAR	2
Write CMD (WCFG)	2
Write FDRI	part size dependent
Write CMD (DGHIGH)	2
Command Set 3	
Write COR	2
Write CMD (START)	2
Write CTL	2
Write CRC	2
Write CMD (DESYNCH)	
Dummy words	4
TOTAL	40

The first command set prepares the internal configuration logic for the loading of the data frames. The internal configuration logic is first initialized with several CCLK cycles represented by dummy words, then it is synchronized to recognize the 32-bit word boundaries by the synchronization word. The CRC register and circuitry must then be reset by writing the RCRC command to the CMD register. The frame length size for the device being configured is then loaded into the FLR register. The configuration options are loaded into the COR. The CCLK frequency selected is specified in the COR; however, to switch to that frequency the SWITCH command must be loaded into the CMD register. The ID register is written to ensure that the correct bitstream is being used. Now the data frames can be loaded.

The second command set loads the configuration data frames. First, a WCFG (Write Configuration) command is loaded into the CMD register activating the circuitry that writes the data loaded into the FDRI into the configuration memory cells. To load a set of data frames, the starting address for the first frame is first loaded to the FAR, followed by a write command, and then by the data frames to the FDRI. The FDRI write command also

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 336 of 947

specifies the amount of data that is to follow in terms of the number of 32-bit words that comprise the data frames being written. When all but the last frame has been loaded, an initial CRC checksum is loaded into the CRC register. The De-assert GHIGH (DGHIGH) is loaded into the CMD register.

The third command set initializes the Start-Up Sequence and finishes CRC checking. After all the data frames have been loaded, the START command is loaded into the CMD register, followed by any internal control data to CTL, the final CRC value into the CRC register, and the DESYNCH command to the CMD register. The four dummy words at the end are flushed through the system to provide the finishing CCLK cycles to activate the FPGA.

Standard Bitstream

Virtex-II Pro devices have the ability to be only partially re-configured or read back. The standard bitstream, currently generated by BitGen, follows the format shown in Table 4-23, Table 4-24, and Table 4-25. *This format assumes D0 is considered the MSB*. It is divided into three tables to follow the three command sets described in the previous subsection.

Table 4-23 shows the first set of commands in the bitstream that prepare the configuration logic for rewriting the memory frames. All commands are described as 32-bit words, since configuration data is internally processed from a common 32-bit bus.

Table 4-23: **Bitstream Header and Configuration Options**

Data Type
Dummy word
Synchronization word
Packet Header: Write to CMD register
Packet Data: RCRC
Packet Header: Write to FLR register
Packet Data: Frame Length
Packet Header: Write to COR
Packet Data: Configuration options (user defined)
Packet Header: Write to ID register
Packet Data: IDCODE
Packet Header: Write to CMD register
Packet Data: SWITCH
Packet Header: Write to CMD register
Packet Data: WCFG

From Table 4-23, the first dummy word pads the front of the bitstream to provide the clock cycles necessary for initialization of the configuration logic. No actual processing takes place until the synchronization word is loaded. Since the Virtex-II Pro configuration logic processes data as 32-bit words, but can be configured from a serial or 8-bit source, the synchronization word is used to define the 32-bit word boundaries. That is, the first bit after the synchronization word is the first bit of the next 32-bit word, and so on.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 337 of 947

After synchronization, all data (register writes and frame data) are encapsulated in *packets*. There are two kinds of packets, Header and Data. A header packet has two types: Type 1 and Type 2. Type 1 Packet Headers are used for register writes. A combination of Type 1 and Type Packet Headers are used for frame data writes. A Type 1 Packet Header, shown in Figure 4-35, is always a single 32-bit word that describes the header type, whether it is a read/write function to a specific configuration register address (see Table 4-17) as the destination, and how many 32-bit words are in the following Packet Data portion. A Type 1 Packet Data portion can contain anywhere from 0 to 2,047 32-bit data words.

Packet Header	Type	Operation (Write/Read)	Register Address (Destination)	Byte Address	Word Count (32-bit Words)
Bits[31:0]	31:29	28:27	26:13	12:11	10:0
Type 1	001	10 / 01	XXXXXXXXXXXXXX	XX	XXXXXXXXXXX

X138_10_082599

Figure 4-35: **Type 1 Packet Header**

Packet Header	Type	Operation (Write/Read)	Word Count (32-bit Words)
Bits[31:0]	31:29	28:27	26:0
Type 2	010	10 / 01	XXXXXXXXXXXXXXXXXXXXXXXXXXX

X138_11_082599

Figure 4-36: **Type 2 Packet Header**

The first packet header in Table 4-23 is a Type 1 packet header that specifies writing one data word to the CMD register. The following packet data is a data word specifying a reset of the CRC register (compare the data field of Table 4-23 to the binary codes of Table 4-18).

The second packet header in Table 4-23 loads the frame size into the FLR.

The third packet header loads the configuration options into the COR register. The binary description of this register is not documented. Following this is a similar write of the SWITCH command to the CMD register which selects the CCLK frequency specified in the COR. Finally, the WCFG command is loaded into the CMD register so that the loading of frame data can commence.

The fourth packet header writes to the ID register. This ensures the correct bitstream for the correct Virtex-II Pro family member.

Table 4-24 shows the packets that load all of the data frames, starting with a Type 1 packet header to load the starting frame address, which is always 0h.

Table 4-24: **Bitstream Data Frames and CRC Sequence**

Data Type
Packet Header: Write to FAR register
Packet Data: Starting frame address
Packet Header: Write to FDRI
Packet Header Type 2: Data words
Packet Data: Configuration data frames in 32-bit words. Total number of words specified in Type 2 Packet Header
Packet Data: CRC value
Packet Header: Write to CMD register

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 338 of 947

Table 4-24: **Bitstream Data Frames and CRC Sequence *(Continued)***

Data Type
Packet Data: GRESTORE
Packet Header: Write to CMD register
Packet Data: DGHIGH
Packet Header: NO OP
Packet Data: one frame of NO OP

The loading of data frames requires a combination of Type 1 and Type 2 packet headers. Type 2 packet headers must always be preceded by a Type 1 packet header. The Type 2 packet data can be up to 67,108,863 data words in size.

The Type 2 packet header, shown in Figure 4-36, differs slightly from a Type 1 packet header in that there is no Register Address or Byte Address fields.

To write a set of data frames to the configuration memory, after the starting frame address has been loaded into the FAR, a Type 1 packet header issues a write command to the FDRI, followed by a Type 2 packet *header* specifying the number of data words to be loaded, and then followed by the actual frame data as Type 2 packet *data*. Writing data frames might require a Type 1/Type 2 packet header combination, or a Type 1 only. This depends on the amount of data being written.

Table 4-25 shows the packets needed to issue the start-up operations and load the final CRC check. The FPGA does not go active until after the final CRC is loaded. The number of clock cycles required to complete the start-up sequence depends on the BitGen options selected. Completion of the configuration process requires 8 to 16 clock cycles after the DESYNCH command. The DESYNCH command forces realignment to 32-bit boundaries and, therefore, a synchronization word is needed.

Table 4-25: **Bitstream Final CRC and Start-Up Sequence**

Data Type
Packet Header: Write to CMD register
Packet Data: START
Packet Header: Write to MASK
Packet Data: CTL mask
Packet Header: Write to CTL
Packet Data: Control commands
Packet Header: Write to CRC
Packet Data: CRC value
Packet Header: Write to CMD
Packet Data: DESYNCH command
Dummy word
Dummy word
Dummy word
Dummy word

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 339 of 947

Typically, DONE is released within the first seven CCLK cycles after the final CRC value is loaded, but the rest of the dummy data at the end of the stream should continue to be loaded. The FPGA needs the additional clock cycles to finish internal processing, but this is not a concern when a free-running oscillator is used for CCLK. In serial mode, this requires only 16 bits (two bytes), but in SelectMAP mode, this requires 16 bytes of dummy words at the end of the bitstream. Since the intended configuration mode to be used is unknown by Bitgen, four 32-bit dummy words (16 bytes) are always placed at the end of the bitstream.

Cyclic Redundancy Checking Algorithm

Virtex-II Pro configuration uses a standard 16-bit CRC checksum algorithm to verify bitstream integrity during configuration. The 16-bit CRC polynomial is shown below.

$$CRC\text{-}16 = X^{16} + X^{15} + X^{2} + 1$$

The algorithm is implemented by shifting the data stream into a 16-bit shift register, shown in Figure 4-37. Register Bit(0) receives an XOR of the incoming data and the output of Bit(15). Bit(2) receives an XOR of the input to Bit(0) and the output of Bit(1). Bit(15) receives an XOR of the input to Bit(0) and the output of Bit(14).

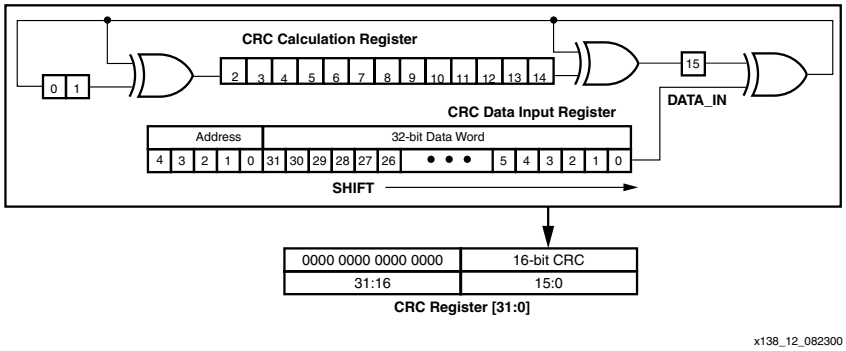


Figure 4-37: **Serial 16-bit CRC Circuitry**

A CRC Reset resets all the CRC registers to zero. As data is shifted into the CRC circuitry, a CRC calculation accumulates in the registers. When the CRC value is loaded into the CRC calculation register, the ending CRC checksum is loaded into the CRC Register. The value loaded into the CRC Register should be zero; otherwise, the configuration failed CRC check.

Not all of the configuration stream is loaded into the CRC circuitry. Only data that is written to one of the registers shown in Table 4-22 is included. For each 32-bit word that is written to one of the registers (Table 4-22), the address code for the register and the 32-bit data word is shifted LSB first into the CRC calculation circuitry, see Figure 4-37. When multiple 32-bit words are written to the same register, the same address is loaded after each word. All other data in the configuration stream is ignored and does not affect the CRC checksum.

This description is a model that can be used to generate an identical CRC value. The actual circuitry in the device is a slightly more complex Parallel CRC circuit that produces the same result.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 340 of 947

Readback

Readback is the process of reading all the data in the internal configuration memory. This can be used to verify that the current configuration data is correct and to read the current state of all internal CLB and IOB registers as well as the current LUT RAM and block RAM values.

Readback is only available through the SelectMAP and Boundary Scan interfaces. This discussion covers the use of the SelectMAP interface for performing readback. For information on using the Boundary Scan interface for readback, see "Readback When Using Boundary Scan," page 339.

Readback Verification and Capture

Readback verification is used to verify the validity of the stored configuration data. This is most commonly used in space-based applications where exposure to radiation might alter the data stored in the configuration memory cells.

Readback capture is used to list the states of all the internal flip-flops. This can be used for hardware debugging and functional verification. When Capture is initiated, the internal register states are loaded into unused spaces in the configuration memory which can be extracted after a readback of the configuration memory.

While both *Verify* and *Capture* can be performed in one readback, each require slightly different preparation and post processing.

Preparing for Readback in Design Entry

If only a readback verification is to be performed, there are no additional steps at the time of design entry. However, if readback capture is to be used, the Virtex-II Pro library primitive CAPTURE_VIRTEX2 must be instantiated in the user design as shown in Figure 4-38.

The CAPTURE_VIRTEX2 component is used in the FPGA design to control when the logic states of all the registers are captured into configuration memory. The CLK pin can be driven by any clock source that would synchronize Capture to the changing logic states of the registers. The CAP pin is an enable control. When CAP is asserted, the register states are captured in memory on the next CLK rising edge.

Capture can be performed in two ways: single-shot or continuous. In continuous capture, the CAP line is held High until the desired capture event occurs causing CAP to go Low. See Figure 4-38. Continuous capture does not require a readback operation to reset the CAPTURE block. In single-shot capture, the CAP line is pulsed once, and subsequent pulses are ignored until a readback operation has been performed. Captured data is read using the same process as a normal readback.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 341 of 947

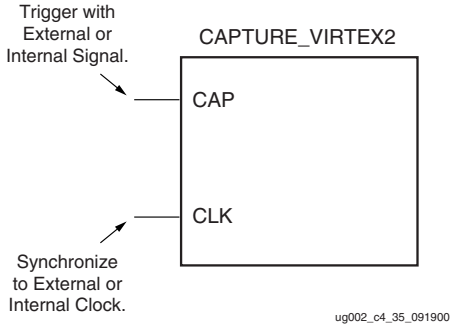


Figure 4-38: **Readback CAPTURE_VIRTEX2 Library Primitive**

Enabling Readback in the Software

Since readback is performed through the SelectMAP interface after configuration, the configuration ports must continue to be active by setting the persistence switch in BitGen. Additionally, a readback bit file, which contains the commands to execute a readback and a bitmap for data verification, can optionally be generated by setting the readback option in BitGen. An example of the BitGen command line is shown below.

```
bitgen -w -l -m -g readback -g persist:yes ...
```

The **-w** option overwrites existing output. The **-l** option generates a *Logic Allocation* file. The **-m** option generates a *Mask* file. The **-g readback** option generates a *readback bit* file, and the **-g persist:yes** option keeps the SelectMAP interface active after configuration. For more information on BitGen options, see Appendix A, "BitGen and PROMGen Switches and Options."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 342 of 947

Readback When Using Boundary Scan

Regular Readback Flow

It is highly recommended to perform shutdown before reading back bitstream to ensure normal operation. The Shutdown Sequence can be executed by loading the JSHUTDOWN instruction and spending at least 12 TCK cycles in RTI TAP controller state. CRC_ERROR status and configuration error (CFGERR) must be cleared after readback by issuing Reset CRC bitstream command or writing the correct CRC value to CRC register.

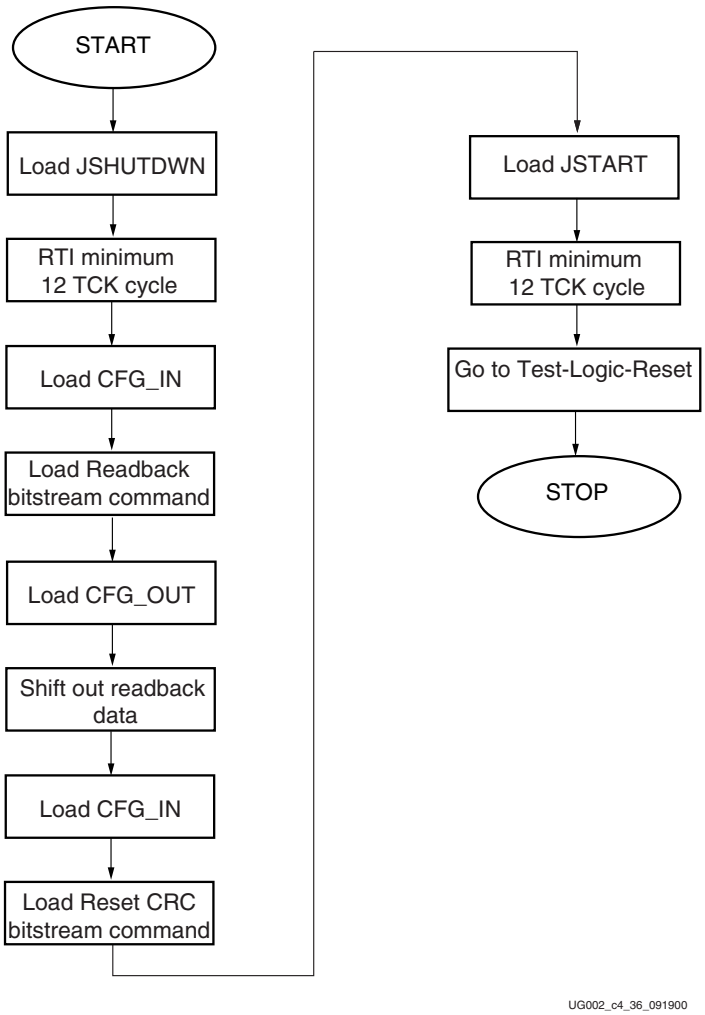


Figure 4-39: **Regular Readback Flow**

IEEE 1532 Readback Flow

In IEEE 1532 readback mode, full chip shutdown is performed when ISC_ENABLE is executed. At the end of readback, CRC Error status must be cleared by issuing Reset CRC

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 343 of 947

command or writing the correct CRC value to CRC register. ISC_DISABLE cannot be executed correctly unless the CRC error status is cleared.

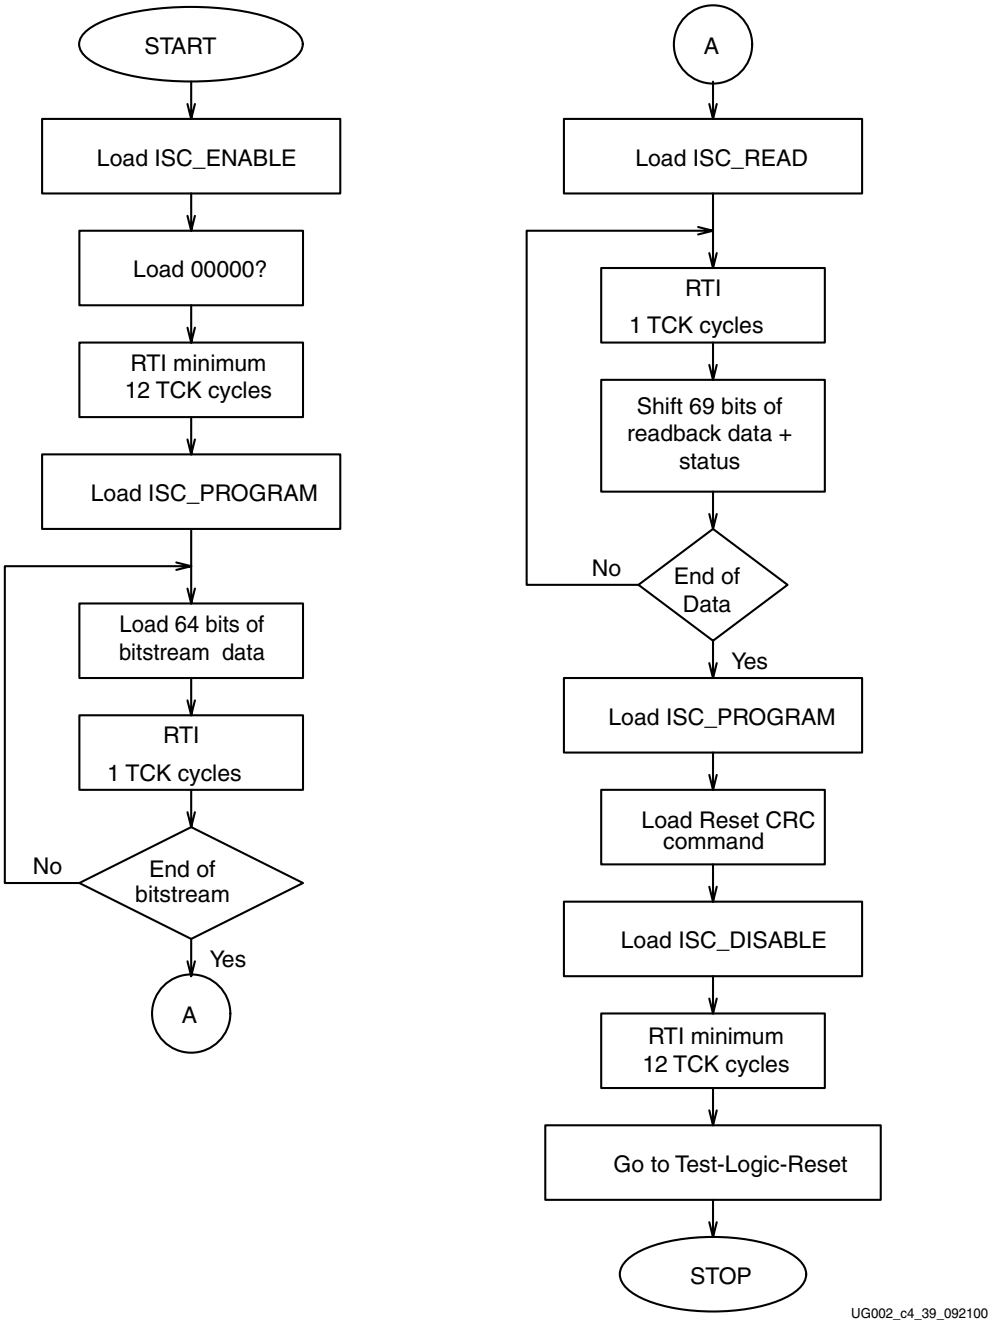


Figure 4-40: **IEEE 1532 Readback Flow**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 344 of 947

Using ChipScope Pro

The ChipScope Pro on-chip verification tool is sold separately through an authorized Xilinx distributor or over the Xilinx web site. This program uses a combination of PC software and instantiated soft cores to capture states of internal signals. Communication is accomplished via the JTAG USER1 or USER2 scan chain using a Xilinx communication cable. The initial release of ChipScope Pro supports only Virtex-II and Virtex-II Pro devices and allows for internal debug of any internal user logic. ChipScope Pro also allows direct, on-chip debug of the CoreConnect bus in Virtex-II Pro devices.

ChipScope Pro supports a high speed USB interface between a host computer and the Virtex-II Pro device using the Xilinx MultiLINX cable on Windows 98/2000 platforms and the RS232 connection using the Xilinx JTAG cable on Windows 98/2000/NT platforms. Solaris 2.7 and 2.8 support is available for core generation and core insertion only. More details are available on the www.xilinx.com/chipscope web site.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 345 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 346 of 947

Chapter 5

PCB Design Considerations

Summary

This chapter covers the following topics:

- Pinout Information
- Pinout Diagrams
- Package Specifications
- Flip-Chip Packages
- Thermal Data
- Printed Circuit Board Considerations
- Board Routability Guidelines
- XPower
- IBIS Models
- BSDL and Boundary Scan Models

Pinout Information

Introduction

This section describes the pinouts for Virtex-II Pro devices in the following packages:

- FG256, FG456, and FG676: wire-bond fine-pitch BGA of 1.00 mm pitch
- FF672, FF896, FF1152, FF1148, FF1517, FF1704, and FF1696: flip-chip fine-pitch BGA of 1.00 mm pitch

All of the devices supported in a particular package are pinout compatible and are listed in the same table (one table per package). Pins that are not available for the smaller devices are listed in the "No Connects" column.

Each device is split into eight I/O banks to allow for flexibility in the choice of I/O standards (see the Virtex-II Pro Data Sheet). Global pins, including JTAG, configuration, and power/ground pins, are listed at the end of each table. Table 5-1 provides definitions for all pin types.

The FG256 pinout (Table 5-2, page 346) is included as an example. All Virtex-II Pro pinout tables are available on the distribution CD-ROM. To be assured of getting the very latest updates and corrections, however, access the pinout tables in Module 4 of the online Virtex-II Pro Data Sheet.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 347 of 947

Pin Definitions

Table 5-1 provides a description of each pin type listed in Virtex-II Pro pinout tables.

Table 5-1: **Virtex-II Pro Pin Definitions**

Pin Name	Direction	Description
User I/O Pins		
IO_LXXY_#	Input/Output	All user I/O pins are capable of differential signalling and can implement LVDS, ULVDS, BLVDS, LVPECL, or LDT pairs. Each user I/O is labeled "**IO_LXXY_#**", where: **IO** indicates a user I/O pin. **LXXY** indicates a differential pair, with **XX** a unique pair in the bank and **Y = [P|N]** for the positive/negative sides of the differential pair. **#** indicates the bank number (0 through 7)
Dual-Function Pins		
IO_LXXY_#/ZZZ		The dual-function pins are labelled "**IO_LXXY_#/ZZZ**", where **ZZZ** can be one of the following pins: Per Bank - **VRP, VRN,** or **VREF** Globally - **GCLKX(S/P), BUSY/DOUT, INIT_B, DIN/D0 – D7, RDWR_B,** or **CS_B**
With /ZZZ:		
DIN / D0, D1, D2, D3, D4, D5, D6, D7	Input/Output	In SelectMAP mode, D0 through D7 are configuration data pins. These pins become user I/Os after configuration, unless the SelectMAP port is retained. In bit-serial modes, DIN (D0) is the single-data input. This pin becomes a user I/O after configuration.
CS_B	Input	In SelectMAP mode, this is the active-low Chip Select signal. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained.
RDWR_B	Input	In SelectMAP mode, this is the active-low Write Enable signal. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained.
BUSY/DOUT	Output	In SelectMAP mode, BUSY controls the rate at which configuration data is loaded. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained. In bit-serial modes, DOUT provides preamble and configuration data to downstream devices in a daisy-chain. The pin becomes a user I/O after configuration.
INIT_B	Bidirectional (open-drain)	When Low, this pin indicates that the configuration memory is being cleared. When held Low, the start of configuration is delayed. During configuration, a Low on this output indicates that a configuration data error has occurred. The pin becomes a user I/O after configuration.
GCLKx (S/P)	Input	These are clock input pins that connect to Global Clock Buffers. These pins become regular user I/Os when not needed for clocks.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 348 of 947

Table 5-1: **Virtex-II Pro Pin Definitions *(Continued)***

Pin Name	Direction	Description
VRP	Input	This pin is for the DCI voltage reference resistor of P transistor (per bank, to be pulled Low with reference resistor).
VRN	Input	This pin is for the DCI voltage reference resistor of N transistor (per bank, to be pulled High with reference resistor).
V_{REF}	Input	These are input threshold voltage pins. They become user I/Os when an external threshold voltage is not needed (per bank).
Dedicated Pins (1)		
CCLK	Input/Output	Configuration clock. Output in Master mode or Input in Slave mode.
PROG_B	Input	Active Low asynchronous reset to configuration logic. This pin has a permanent weak pull-up resistor.
DONE	Input/Output	DONE is a bidirectional signal with an optional internal pull-up resistor. As an output, this pin indicates completion of the configuration process. As an input, a Low level on DONE can be configured to delay the start-up sequence.
M2, M1, M0	Input	Configuration mode selection.
HSWAP_EN	Input	Enable I/O pullups during configuration.
TCK	Input	Boundary Scan Clock.
TDI	Input	Boundary Scan Data Input.
TDO	Output (open-drain)	Boundary Scan Data Output.
TMS	Input	Boundary Scan Mode Select.
PWRDWN_B	Input *(unsupported)*	Active Low power-down pin (unsupported). *Driving this pin Low can adversely affect device operation and configuration.* PWRDWN_B is internally pulled High, which is its default state. It does not require an external pull-up.
Other Pins		
DXN, DXP	N/A	Temperature-sensing diode pins (Anode: DXP, Cathode: DXN).
V_{BATT}	Input	Decryptor key memory backup supply. (Do not connect if battery is not used.)
RSVD	N/A	Reserved pin - do not connect.
V_{CCO}	Input	Power-supply pins for the output drivers (per bank).
V_{CCAUX}	Input	Power-supply pins for auxiliary circuits.
V_{CCINT}	Input	Power-supply pins for the internal core logic.
GND	Input	Ground.
AVCCAUXRX#	Input	Analog power supply for receive circuitry of the multi gigabit transceiver (2.5V).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 349 of 947

Table 5-1: **Virtex-II Pro Pin Definitions *(Continued)***

Pin Name	Direction	Description
AVCCAUXTX#	Input	Analog power supply for transmit circuitry of the multi gigabit transceiver (2.5V).
VTRXPAD#	Input	Receive termination supply for the multi gigabit transceiver (1.8V to 2.8V).
VTTXPAD#	Input	Transmit termination supply for the multi gigabit transceiver (1.8V to 2.8V).
GNDA#	Input	Ground for the analog circuitry of the multi gigabit transceiver.
RXPPAD#	Input	Positive differential receive port of the multi gigabit transceiver.
RXNPAD#	Input	Negative differential receive port of the multi gigabit transceiver.
TXPPAD#	Output	Positive differential transmit port of the multi gigabit transceiver.
TXNPAD#	Output	Negative differential transmit port of the multi gigabit transceiver.

Notes:

1. All dedicated pins (JTAG and configuration) are powered by V_{CCAUX} (independent of the bank V_{CCO} voltage).

FG256 Fine-Pitch BGA Package

As shown in Table 5-2, XC2VP2 and XC2VP4 Virtex-II Pro devices are available in the FG256 fine-pitch BGA package. The pins in each of these devices are identical.

The FG256 pinout information (Table 5-2) is included as an example. All Virtex-II Pro pinout tables are available on the distribution CD-ROM. To be assured of getting the very latest updates and corrections, access the pinout tables in Module 4 of the online Virtex-II Pro Data Sheet.

Table 5-2: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
0	IO_L01N_0/VRP_0	C2
0	IO_L01P_0/VRN_0	C3
0	IO_L02N_0	B3
0	IO_L02P_0	C4
0	IO_L03N_0	A2
0	IO_L03P_0/VREF_0	A3
0	IO_L06N_0	D5
0	IO_L06P_0	C5
0	IO_L07P_0	D6
0	IO_L09N_0	E6
0	IO_L09P_0/VREF_0	E7
0	IO_L69N_0	D7
0	IO_L69P_0/VREF_0	C7

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 350 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
0	IO_L74N_0/GCLK7P	D8
0	IO_L74P_0/GCLK6S	C8
0	IO_L75N_0/GCLK5P	B8
0	IO_L75P_0/GCLK4S	A8
1	IO_L75N_1/GCLK3P	A9
1	IO_L75P_1/GCLK2S	B9
1	IO_L74N_1/GCLK1P	C9
1	IO_L74P_1/GCLK0S	D9
1	IO_L69N_1/VREF_1	C10
1	IO_L69P_1	D10
1	IO_L09N_1/VREF_1	E10
1	IO_L09P_1	E11
1	IO_L07N_1	D11
1	IO_L06N_1	C12
1	IO_L06P_1	D12
1	IO_L03N_1/VREF_1	A14
1	IO_L03P_1	A15
1	IO_L02N_1	C13
1	IO_L02P_1	B14
1	IO_L01N_1/VRP_1	C14
1	IO_L01P_1/VRN_1	C15
2	IO_L01N_2/VRP_2	E14
2	IO_L01P_2/VRN_2	E15
2	IO_L02N_2	E13
2	IO_L02P_2	F12
2	IO_L03N_2	F13
2	IO_L03P_2	F14
2	IO_L04N_2/VREF_2	F15
2	IO_L04P_2	F16
2	IO_L06N_2	G13
2	IO_L06P_2	G14
2	IO_L85N_2	G15
2	IO_L85P_2	G16

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 351 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
2	IO_L86N_2	G12
2	IO_L86P_2	H13
2	IO_L88N_2/VREF_2	H14
2	IO_L88P_2	H15
2	IO_L90N_2	H16
2	IO_L90P_2	J16
3	IO_L90N_3	J15
3	IO_L90P_3	J14
3	IO_L89N_3	J13
3	IO_L89P_3	K12
3	IO_L87N_3/VREF_3	K16
3	IO_L87P_3	K15
3	IO_L85N_3	K14
3	IO_L85P_3	K13
3	IO_L06N_3	L16
3	IO_L06P_3	L15
3	IO_L05N_3	L14
3	IO_L05P_3	L13
3	IO_L03N_3/VREF_3	L12
3	IO_L03P_3	M13
3	IO_L02N_3	M16
3	IO_L02P_3	N16
3	IO_L01N_3/VRP_3	M15
3	IO_L01P_3/VRN_3	M14
4	IO_L01N_4/DOUT	P15
4	IO_L01P_4/INIT_B	P14
4	IO_L02N_4/D0	R14
4	IO_L02P_4/D1	P13
4	IO_L03N_4/D2	T15
4	IO_L03P_4/D3	T14
4	IO_L06N_4/VRP_4	N12
4	IO_L06P_4/VRN_4	P12
4	IO_L07P_4/VREF_4	N11

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 352 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
4	IO_L09N_4	M11
4	IO_L09P_4/VREF_4	M10
4	IO_L69N_4	N10
4	IO_L69P_4/VREF_4	P10
4	IO_L74N_4/GCLK3S	N9
4	IO_L74P_4/GCLK2P	P9
4	IO_L75N_4/GCLK1S	R9
4	IO_L75P_4/GCLK0P	T9
5	IO_L75N_5/GCLK7S	T8
5	IO_L75P_5/GCLK6P	R8
5	IO_L74N_5/GCLK5S	P8
5	IO_L74P_5/GCLK4P	N8
5	IO_L69N_5/VREF_5	P7
5	IO_L69P_5	N7
5	IO_L09N_5/VREF_5	M7
5	IO_L09P_5	M6
5	IO_L07N_5/VREF_5	N6
5	IO_L06N_5/VRP_5	P5
5	IO_L06P_5/VRN_5	N5
5	IO_L03N_5/D4	T3
5	IO_L03P_5/D5	T2
5	IO_L02N_5/D6	P4
5	IO_L02P_5/D7	R3
5	IO_L01N_5/RDWR_B	P3
5	IO_L01P_5/CS_B	P2
6	IO_L01P_6/VRN_6	M3
6	IO_L01N_6/VRP_6	M2
6	IO_L02P_6	N1
6	IO_L02N_6	M1
6	IO_L03P_6	M4
6	IO_L03N_6/VREF_6	L5
6	IO_L05P_6	L4
6	IO_L05N_6	L3

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 353 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
6	IO_L06P_6	L2
6	IO_L06N_6	L1
6	IO_L85P_6	K4
6	IO_L85N_6	K3
6	IO_L87P_6	K2
6	IO_L87N_6/VREF_6	K1
6	IO_L89P_6	K5
6	IO_L89N_6	J4
6	IO_L90P_6	J3
6	IO_L90N_6	J2
7	IO_L90P_7	J1
7	IO_L90N_7	H1
7	IO_L88P_7	H2
7	IO_L88N_7/VREF_7	H3
7	IO_L86P_7	H4
7	IO_L86N_7	G5
7	IO_L85P_7	G1
7	IO_L85N_7	G2
7	IO_L06P_7	G3
7	IO_L06N_7	G4
7	IO_L04P_7	F1
7	IO_L04N_7/VREF_7	F2
7	IO_L03P_7	F3
7	IO_L03N_7	F4
7	IO_L02P_7	F5
7	IO_L02N_7	E4
7	IO_L01P_7/VRN_7	E2
7	IO_L01N_7/VRP_7	E3
0	VCCO_0	F8
0	VCCO_0	F7
0	VCCO_0	E8
1	VCCO_1	F9
1	VCCO_1	F10

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 354 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
1	VCCO_1	E9
2	VCCO_2	H12
2	VCCO_2	H11
2	VCCO_2	G11
3	VCCO_3	K11
3	VCCO_3	J12
3	VCCO_3	J11
4	VCCO_4	M9
4	VCCO_4	L9
4	VCCO_4	L10
5	VCCO_5	M8
5	VCCO_5	L8
5	VCCO_5	L7
6	VCCO_6	K6
6	VCCO_6	J6
6	VCCO_6	J5
7	VCCO_7	H6
7	VCCO_7	H5
7	VCCO_7	G6
N/A	CCLK	N15
N/A	PROG_B	D1
N/A	DONE	P16
N/A	M0	N3
N/A	M1	N2
N/A	M2	P1
N/A	TCK	D16
N/A	TDI	E1
N/A	TDO	E16
N/A	TMS	C16
N/A	PWRDWN_B	N14
N/A	HSWAP_EN	C1
N/A	RSVD	D14
N/A	VBATT	D15
N/A	DXP	D2

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 355 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
N/A	DXN	D3
N/A	AVCCAUXTX6	B5
N/A	VTTXPAD6	B4
N/A	TXNPAD6	A4
N/A	TXPPAD6	A5
N/A	GNDA6	C6
N/A	GNDA6	C6
N/A	RXPPAD6	A6
N/A	RXNPAD6	A7
N/A	VTRXPAD6	B6
N/A	AVCCAUXRX6	B7
N/A	AVCCAUXTX7	B11
N/A	VTTXPAD7	B10
N/A	TXNPAD7	A10
N/A	TXPPAD7	A11
N/A	GNDA7	C11
N/A	GNDA7	C11
N/A	RXPPAD7	A12
N/A	RXNPAD7	A13
N/A	VTRXPAD7	B12
N/A	AVCCAUXRX7	B13
N/A	AVCCAUXRX18	R13
N/A	VTRXPAD18	R12
N/A	RXNPAD18	T13
N/A	RXPPAD18	T12
N/A	GNDA18	P11
N/A	GNDA18	P11
N/A	TXPPAD18	T11
N/A	TXNPAD18	T10
N/A	VTTXPAD18	R10
N/A	AVCCAUXTX18	R11
N/A	AVCCAUXRX19	R7
N/A	VTRXPAD19	R6
N/A	RXNPAD19	T7
N/A	RXPPAD19	T6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 356 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
N/A	GNDA19	P6
N/A	GNDA19	P6
N/A	TXPPAD19	T5
N/A	TXNPAD19	T4
N/A	VTTXPAD19	R4
N/A	AVCCAUXTX19	R5
N/A	VCCINT	N4
N/A	VCCINT	N13
N/A	VCCINT	M5
N/A	VCCINT	M12
N/A	VCCINT	E5
N/A	VCCINT	E12
N/A	VCCINT	D4
N/A	VCCINT	D13
N/A	VCCAUX	R16
N/A	VCCAUX	R1
N/A	VCCAUX	B16
N/A	VCCAUX	B1
N/A	GND	T16
N/A	GND	T1
N/A	GND	R2
N/A	GND	R15
N/A	GND	L6
N/A	GND	L11
N/A	GND	K9
N/A	GND	K8
N/A	GND	K7
N/A	GND	K10
N/A	GND	J9
N/A	GND	J8
N/A	GND	J7
N/A	GND	J10
N/A	GND	H9
N/A	GND	H8

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 357 of 947

Table 5-2: **FG256 — XC2VP2 and XC2VP4 *(Continued)***

Bank	Pin Description	Pin Number
N/A	GND	H7
N/A	GND	H10
N/A	GND	G9
N/A	GND	G8
N/A	GND	G7
N/A	GND	G10
N/A	GND	F6
N/A	GND	F11
N/A	GND	B2
N/A	GND	B15
N/A	GND	A16
N/A	GND	A1

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 358 of 947

Pinout Diagrams

This section contains pinout diagrams for all Virtex-II Pro package/device combinations:

- **FG256 Fine-Pitch BGA Pinout Diagrams**
  - "FG256 Composite Pinout Diagram (XC2VP2, XC2VP4)," page 357
  - "FG256 Banked Pins (XC2VP2, XC2VP4)," page 358
  - "FG256 Dedicated/Other Pins (XC2VP2, XC2VP4)," page 359
- **FG456 Fine-Pitch BGA Pinout Diagrams**
  - "FG456 Composite Pinout Diagram (XC2VP7)," page 361
  - "FG456 Dedicated/Other Pins (XC2VP7)," page 362
  - "FG456 Composite Pinout Diagram (XC2VP4)," page 363
  - "FG456 Banked Pins (XC2VP4, XC2VP7)," page 364
  - "FG456 Composite Pinout Diagram (XC2VP2)," page 365
  - "FG456 Banked Pins (XC2VP2)," page 366
  - "FG456 Dedicated/Other Pins (XC2VP2, XC2VP4," page 367
- **FG676 Fine-Pitch BGA Pinout Diagrams**
  - "FG676 Composite Pinout Diagram (XC2VP30, XC2VP40)," page 369
  - "FG676 Banked Pins (XC2VP30, XC2VP40)," page 370
  - "FG676 Composite Pinout Diagram (XC2VP20)," page 371
  - "FG676 Banked Pins (XC2VP20)," page 372
  - "FG676 Dedicated/Other Pins (XC2VP20, XC2VP30, XC2VP40)," page 373
- **FF672 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF672 Composite Pinout Diagram (XC2VP7)," page 375
  - "FF672 Banked Pins (XC2VP7)," page 376
  - "FF672 Dedicated/Other Pins (XC2VP7)," page 377
  - "FF672 Composite Pinout Diagram (XC2VP4)," page 378
  - "FF672 Banked Pins (XC2VP4)," page 379
  - "FF672 Composite Pinout Diagram (XC2VP2)," page 380
  - "FF672 Banked Pins (XC2VP2)," page 381
  - "FF672 Dedicated/Other Pins (XC2VP2, XC2VP4)," page 382
- **FF896 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF896 Composite Pinout Diagram (XC2VP20, XC2VP30)," page 383
  - "FF896 Banked Pins (XC2VP20, XC2VP30)," page 384
  - "FF896 Composite Pinout Diagram (XC2VP7)," page 385
  - "FF896 Banked Pins (XC2VP7)," page 386
  - "FF896 Dedicated/Other Pins (XC2VP7, XC2VP20, XC2VP30)," page 387
- **FF1152 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF1152 Composite Pinout Diagram (XC2VP50)," page 389
  - "FF1152 Dedicated/Other Pins (XC2VP50)," page 390
  - "FF1152 Composite Pinout Diagram (XC2VP40)," page 391
  - "FF1152 Banked Pins (XC2VP40, XC2VP50)," page 392

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 359 of 947

- "FF1152 Dedicated/Other Pins (XC2VP40)," page 393
- "FF1152 Composite Pinout Diagram (XC2VP30)," page 394
- "FF1152 Banked Pins (XC2VP30)," page 395
- "FF1152 Dedicated/Other Pins (XC2VP30)," page 396
- "FF1152 Composite Pinout Diagram (XC2VP20)," page 397
- "FF1152 Banked Pins (XC2VP20)," page 398
- "FF1152 Dedicated/Other Pins (XC2VP20)," page 399

- **FF1148 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF1148 Composite Pinout Diagram (XC2VP50)," page 401
  - "FF1148 Banked Pins (XC2VP50)," page 402
  - "FF1148 Composite Pinout Diagram (XC2VP40)," page 403
  - "FF1148 Banked Pins (XC2VP40)," page 404
  - "FF1148 Dedicated/Other Pins (XC2VP40, XC2VP50)," page 405
- **FF1517 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF1517 Composite Pinout Diagram (XC2VP70)," page 407
  - "FF1517 Banked Pins (XC2VP70)," page 408
  - "FF1517 Composite Pinout Diagram (XC2VP50)," page 409
  - "FF1517 Banked Pins (XC2VP50)," page 410
  - "FF1517 Dedicated/Other Pins (XC2VP50, XC2VP70)," page 411
- **FF1704 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF1704 Composite Pinout Diagram (XC2VP100, XC2VP125)," page 413
  - "FF1704 Banked Pins (XC2VP100, XC2VP125)," page 414
  - "FF1704 Composite Pinout Diagram (XC2VP70)," page 415
  - "FF1704 Banked Pins (XC2VP70)," page 416
  - "FF1704 Dedicated/Other Pins (XC2VP70, XC2VP100, XC2VP125)," page 417
- **FF1696 Flip-Chip Fine-Pitch BGA Pinout Diagrams**
  - "FF1696 Composite Pinout Diagram (XC2VP125)," page 419
  - "FF1696 Banked Pins (XC2VP125)," page 420
  - "FF1696 Composite Pinout Diagram (XC2VP100)," page 421
  - "FF1696 Banked Pins (XC2VP100)," page 422
  - "FF1696 Dedicated/Other Pins (XC2VP100, XC2VP125)," page 423

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 360 of 947

FG256 Fine-Pitch BGA Pinout Diagrams

FG256 Composite Pinout Diagram (XC2VP2, XC2VP4)

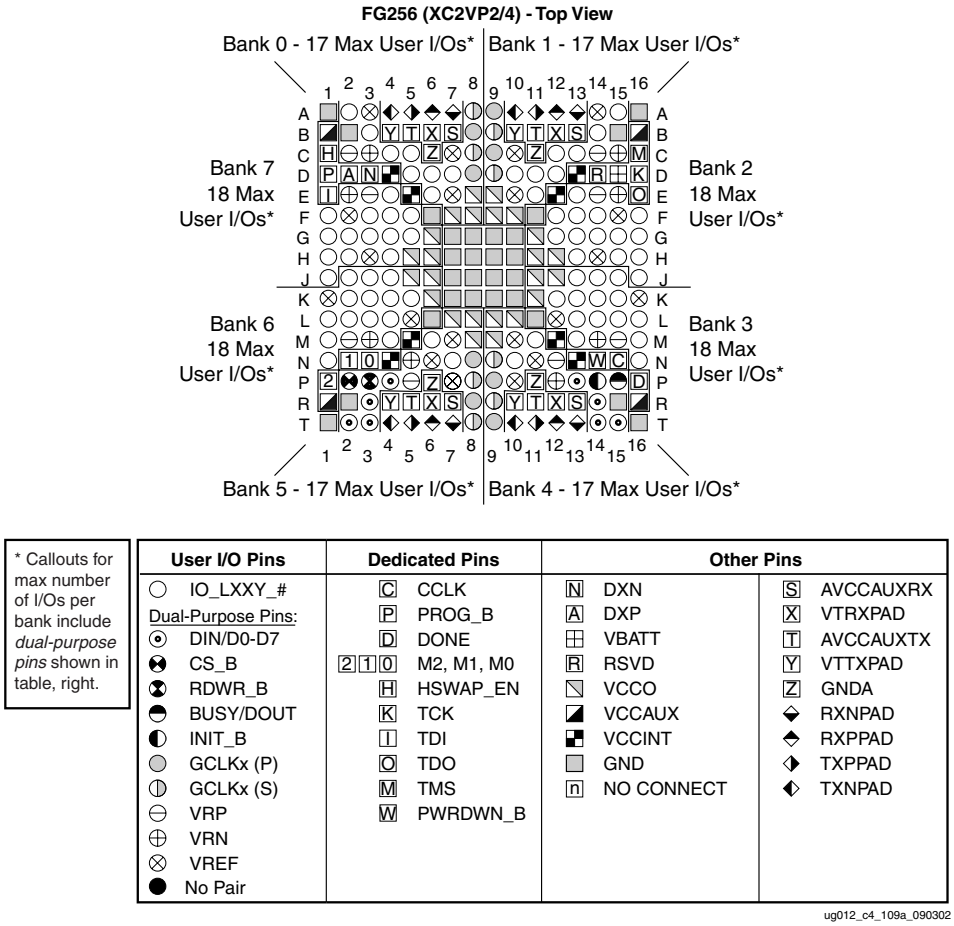


Figure 5-1: **FG256 Composite Pinout Diagram (XC2VP2, XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 361/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 361 of 947

FG256 Banked Pins (XC2VP2, XC2VP4)


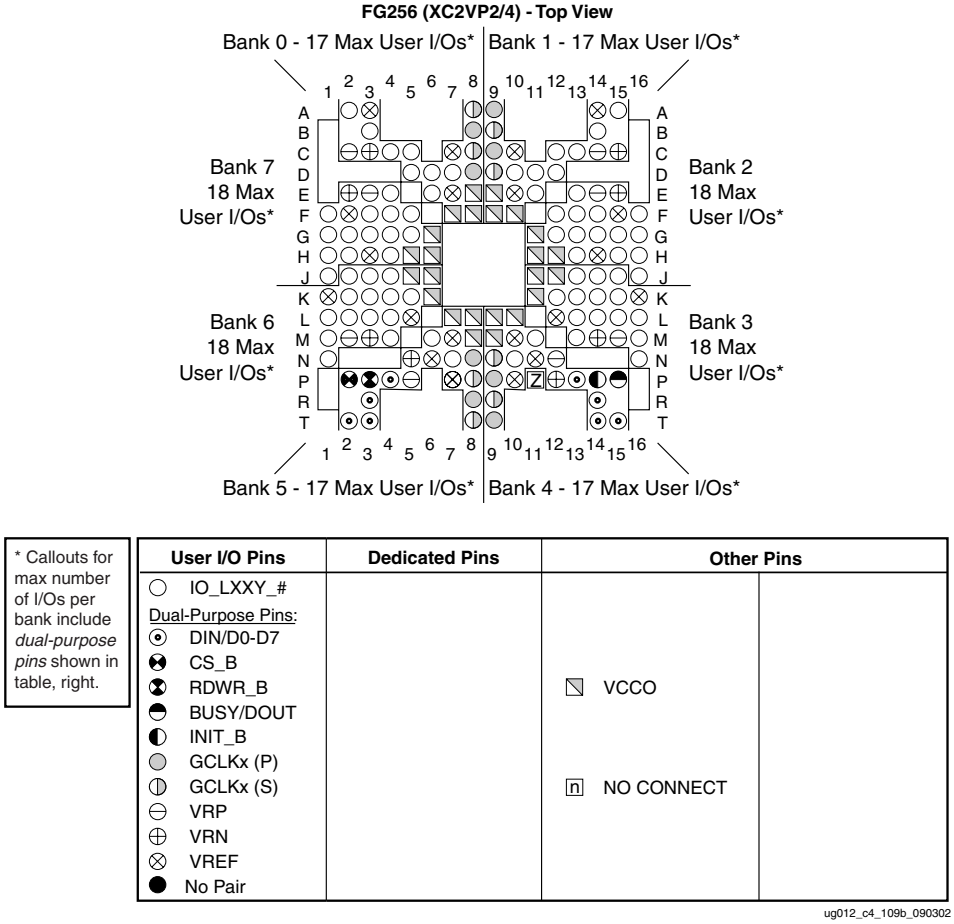


Figure 5-2: **FG256 Banked Pins (XC2VP2, XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 362/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 362 of 947

FG256 Dedicated/Other Pins (XC2VP2, XC2VP4)

FG256 (XC2VP2/4) - Top View

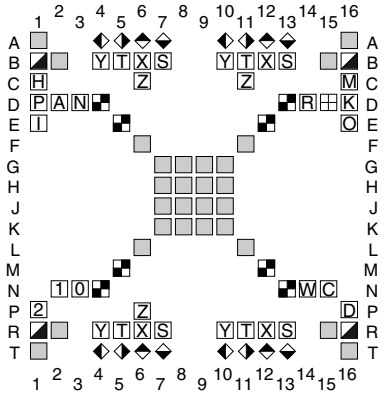

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE		VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK		VCCAUX		RXNPAD
I	TDI		VCCINT		RXPPAD
O	TDO		GND		TXPPAD
M	TMS	n	NO CONNECT		TXNPAD
W	PWRDWN_B				

ug012_c4_109c_082502

Figure 5-3: **FG256 Dedicated/Other Pins (XC2VP2, XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 363 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 364 of 947

FG456 Fine-Pitch BGA Pinout Diagrams

FG456 Composite Pinout Diagram (XC2VP7)

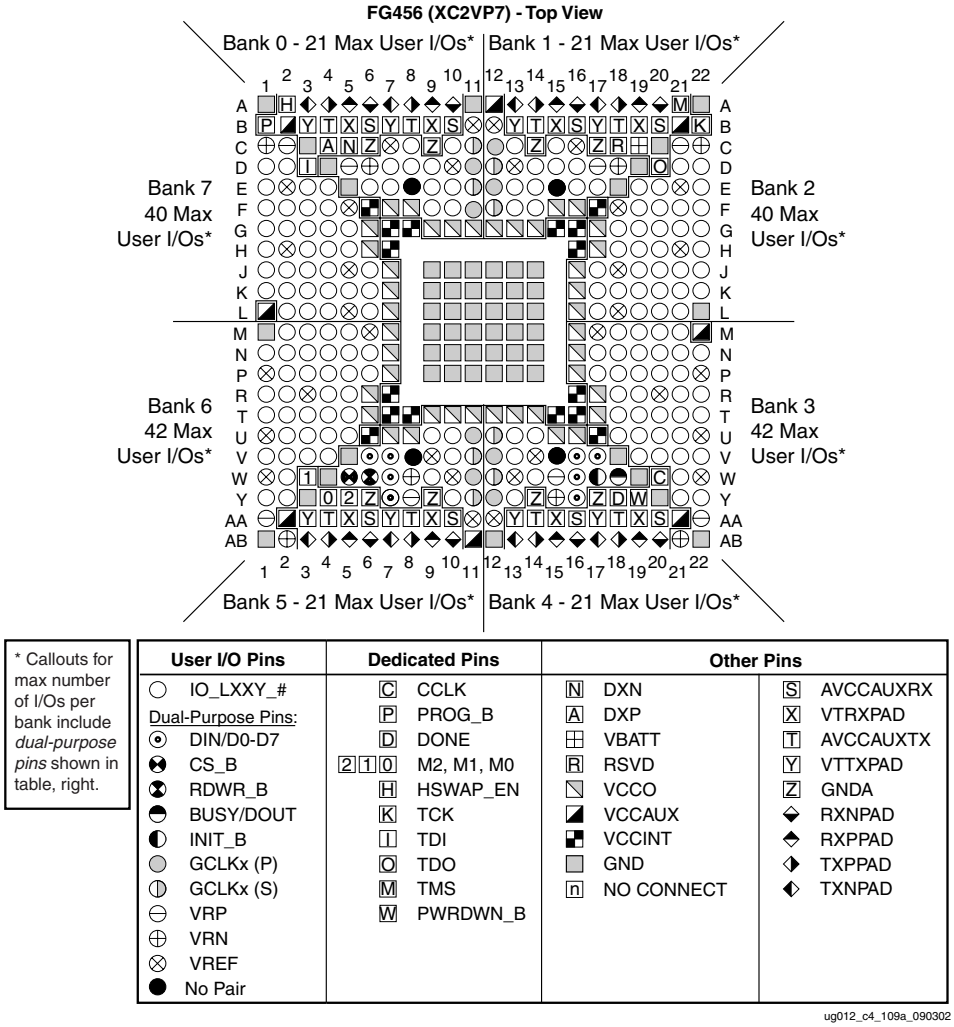



Figure 5-4: **FG456 Composite Pinout Diagram (XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 365 of 947

FG456 Dedicated/Other Pins (XC2VP7)

FG456 (XC2VP7) - Top View

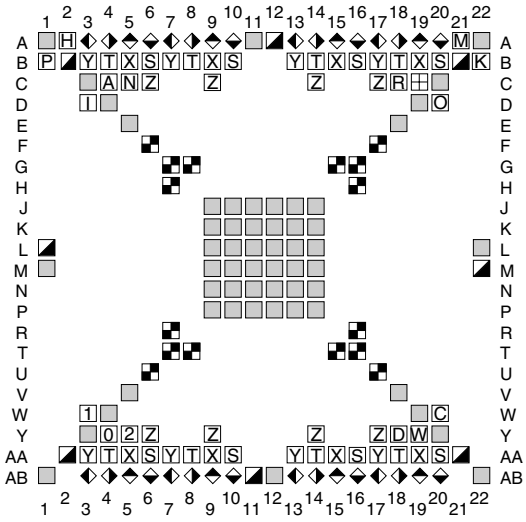

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◪	VCCAUX	◆	RXNPAD
I	TDI	◩	VCCINT	◆	RXPPAD
O	TDO		GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				


ug012_c4_109c_082502

Figure 5-5: **FG456 Dedicated/Other Pins (XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 366 of 947

FG456 Composite Pinout Diagram (XC2VP4)

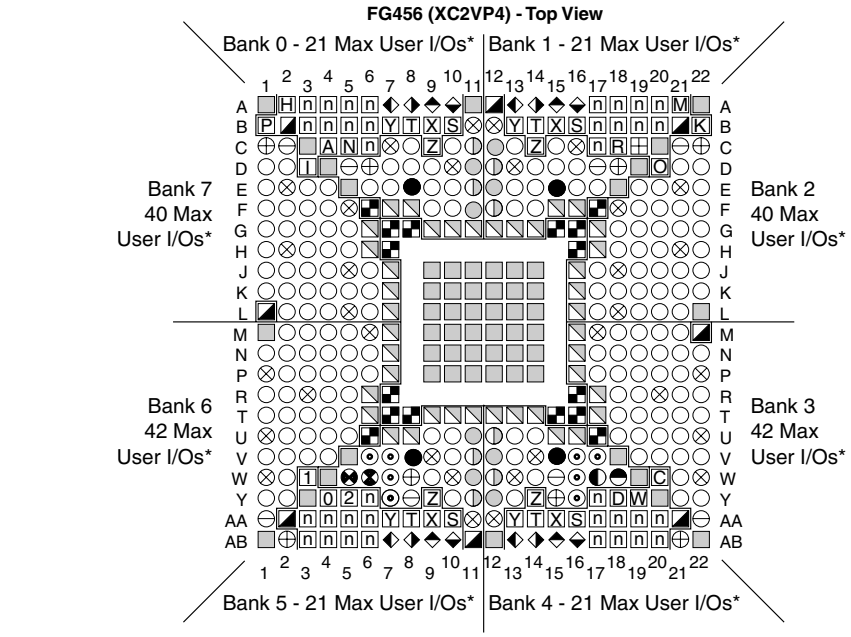

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.


User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_109d_090302

Figure 5-6: **FG456 Composite Pinout Diagram (XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 367/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 367 of 947

FG456 Banked Pins (XC2VP4, XC2VP7)

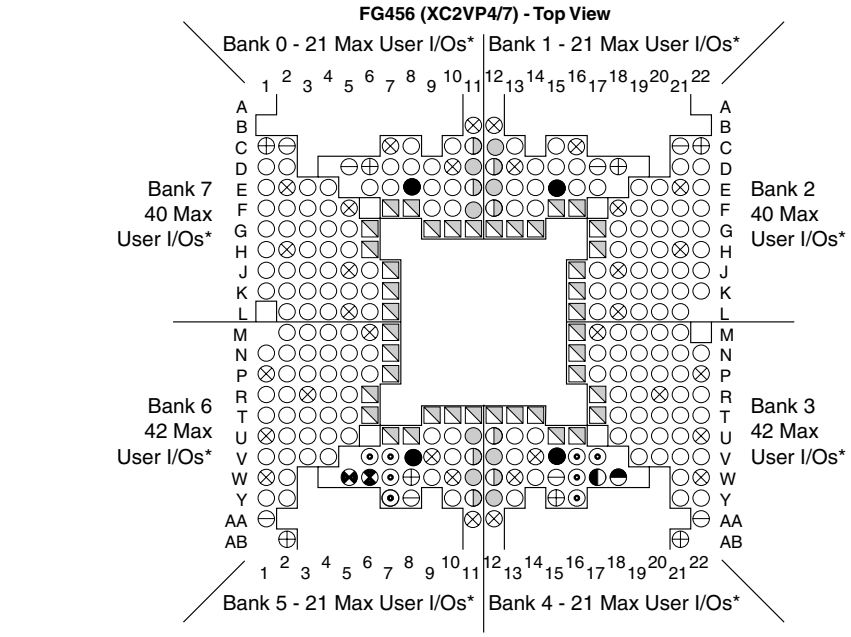

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#			
Dual-Purpose Pins:			
DIN/D0-D7			
CS_B			
RDWR_B		VCCO	
BUSY/DOUT			
INIT_B			
GCLKx (P)			
GCLKx (S)		NO CONNECT	
VRP			
VRN			
VREF			
No Pair			


ug012_c4_109e_090302

Figure 5-7: **FG456 Banked Pins (XC2VP4, XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 368 of 947

FG456 Composite Pinout Diagram (XC2VP2)

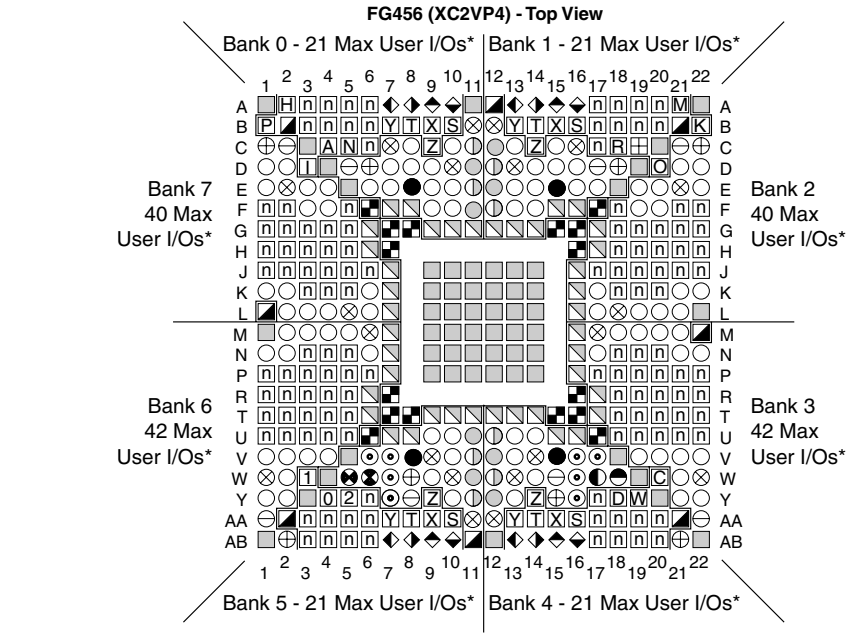

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
DIN/D0-D7	D DONE	VBATT	T AVCCAUXTX
CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
RDWR_B	H HSWAP_EN	VCCO	Z GNDA
BUSY/DOUT	K TCK	VCCAUX	RXNPAD
INIT_B	I TDI	VCCINT	RXPPAD
GCLKx (P)	O TDO	GND	TXPPAD
GCLKx (S)	M TMS	n NO CONNECT	TXNPAD
VRP	W PWRDWN_B		
VRN			
VREF			
No Pair			


ug012_c4_109g_090302

Figure 5-8: **FG456 Composite Pinout Diagram (XC2VP2)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 369 of 947

FG456 Banked Pins (XC2VP2)

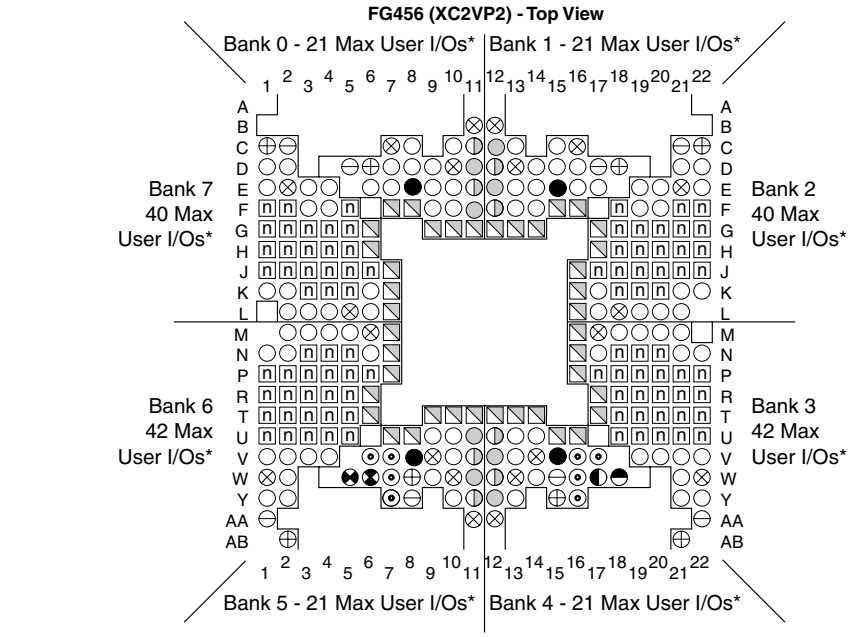

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#			
Dual-Purpose Pins:			
DIN/D0-D7			
CS_B			
RDWR_B		VCCO	
BUSY/DOUT			
INIT_B			
GCLKx (P)			
GCLKx (S)		NO CONNECT	
VRP			
VRN			
VREF			
No Pair			

ug012_c4_109h _090302


Figure 5-9: **FG456 Banked Pins (XC2VP2)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 370 of 947

FG456 Dedicated/Other Pins (XC2VP2, XC2VP4

FG456 (XC2VP2/4) - Top View

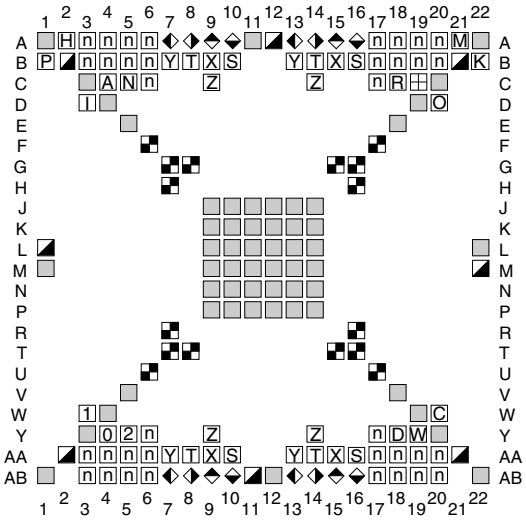

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE		VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK		VCCAUX		RXNPAD
I	TDI		VCCINT		RXPPAD
O	TDO		GND		TXPPAD
M	TMS	n	NO CONNECT		TXNPAD
W	PWRDWN_B				

ug012_c4_109i_082502

Figure 5-10: **FG456 Dedicated/Other Pins (XC2VP2, XC2VP4**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 371 of 947


This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 372 of 947

FG676 Fine-Pitch BGA Pinout Diagrams

FG676 Composite Pinout Diagram (XC2VP30, XC2VP40)

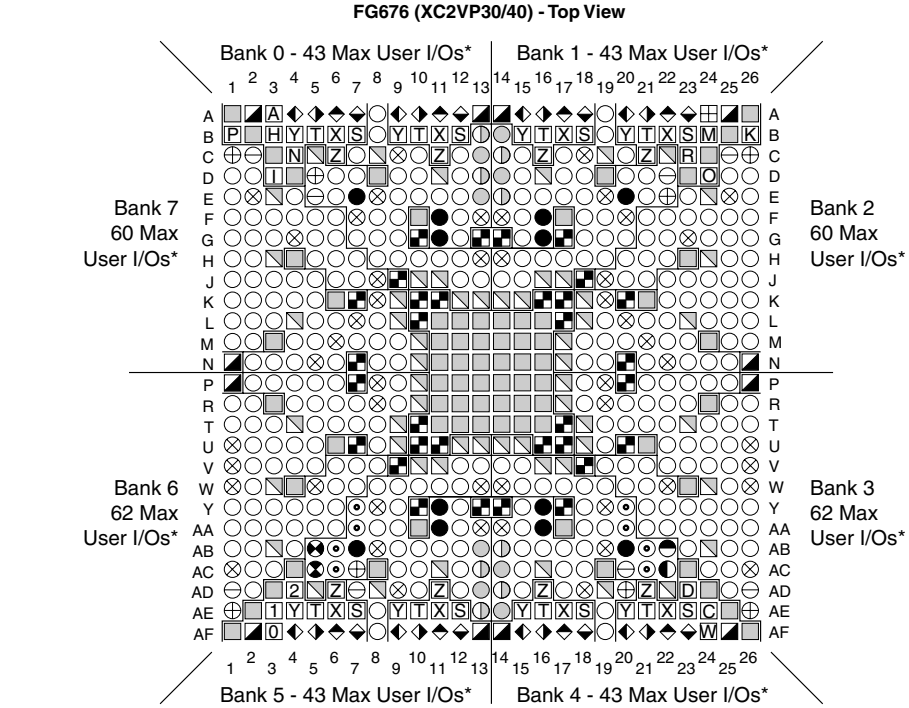

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
DIN/D0-D7	D DONE	VBATT	T AVCCAUXTX
CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
RDWR_B	H HSWAP_EN	VCCO	Z GNDA
BUSY/DOUT	K TCK	VCCAUX	RXNPAD
INIT_B	I TDI	VCCINT	RXPPAD
GCLKx (P)	O TDO	GND	TXPPAD
GCLKx (S)	M TMS	n NO CONNECT	TXNPAD
VRP	W PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_126a_010903

Figure 5-11: **FG676 Composite Pinout Diagram (XC2VP30, XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 373 of 947

FG676 Banked Pins (XC2VP30, XC2VP40)


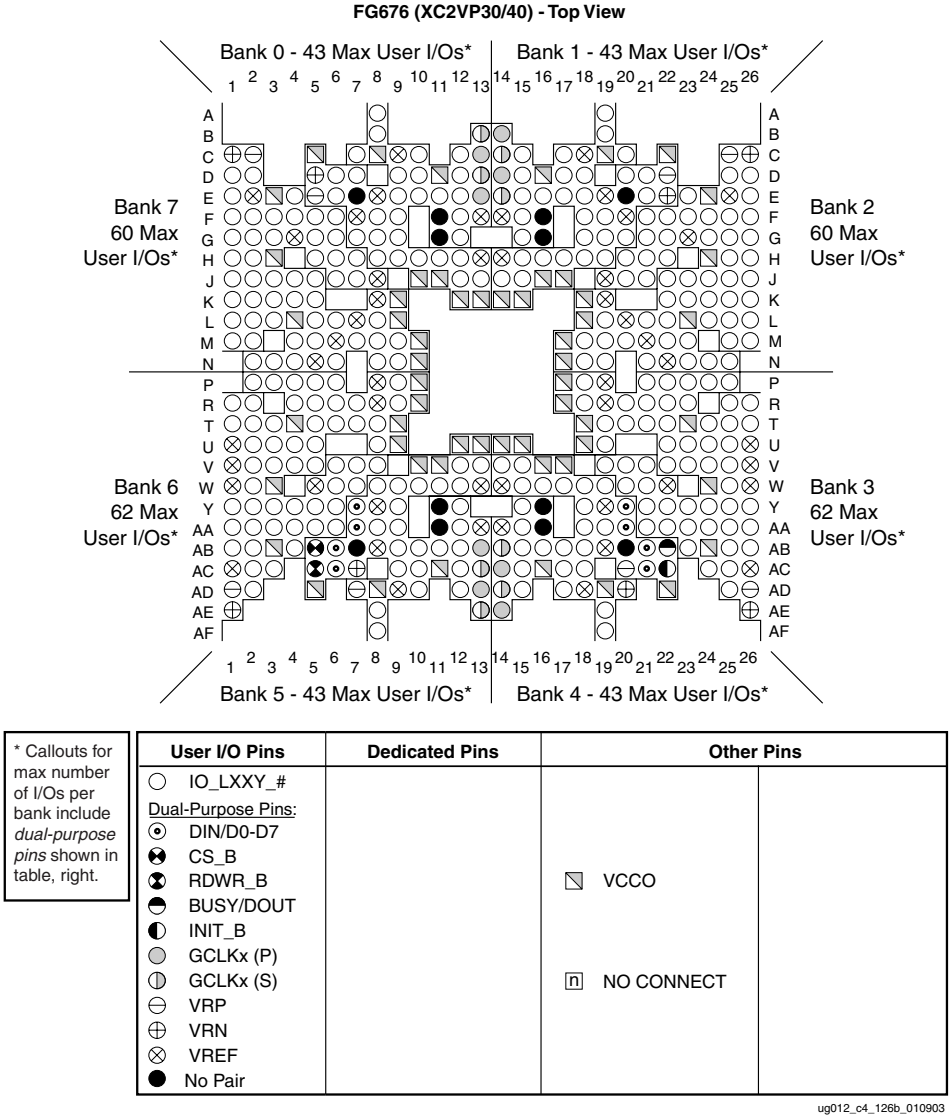


Figure 5-12: **FG676 Banked Pins (XC2VP30, XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 374/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 374 of 947

FG676 Composite Pinout Diagram (XC2VP20)

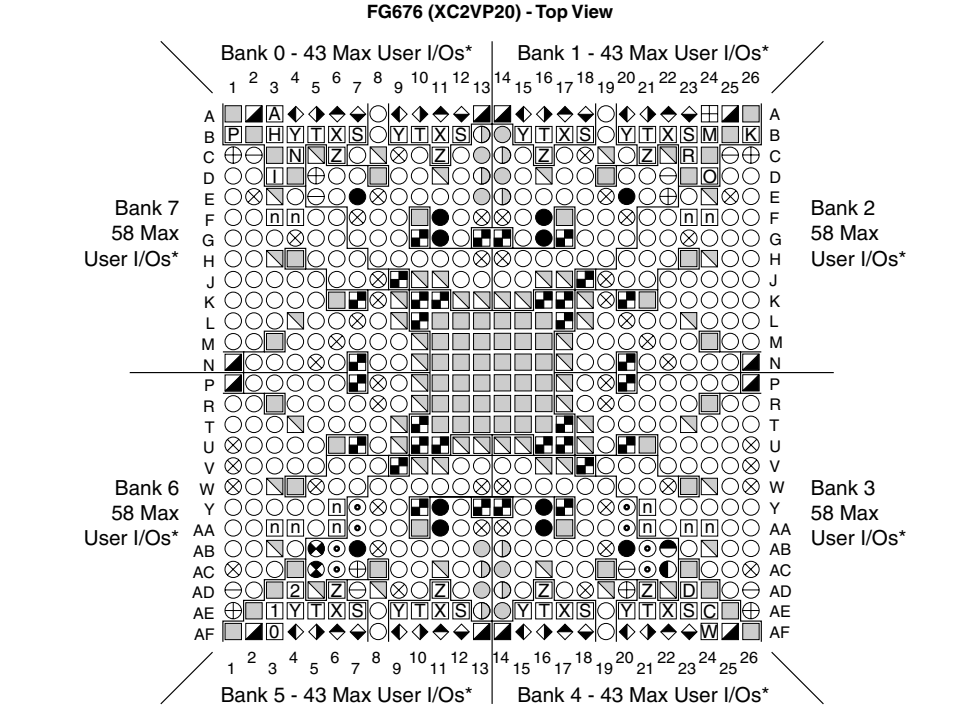

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_126d_010903

Figure 5-13: **FG676 Composite Pinout Diagram (XC2VP20)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 375 of 947

FG676 Banked Pins (XC2VP20)

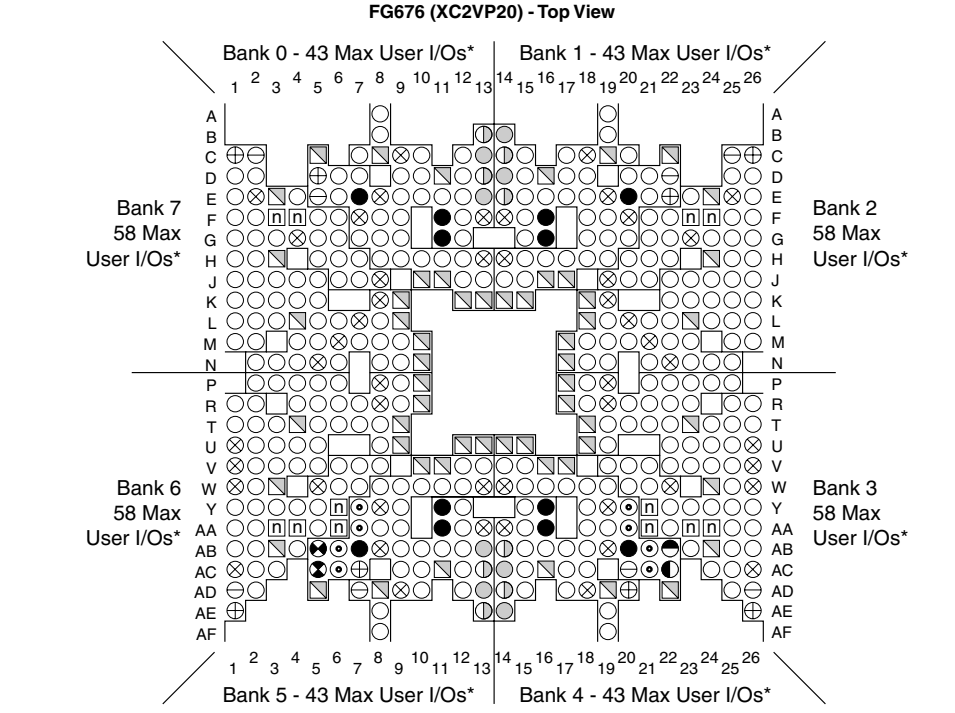



Figure 5-14: **FG676 Banked Pins (XC2VP20)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 376 of 947

FG676 Dedicated/Other Pins (XC2VP20, XC2VP30, XC2VP40)

FG676 (XC2VP20/30/40) - Top View

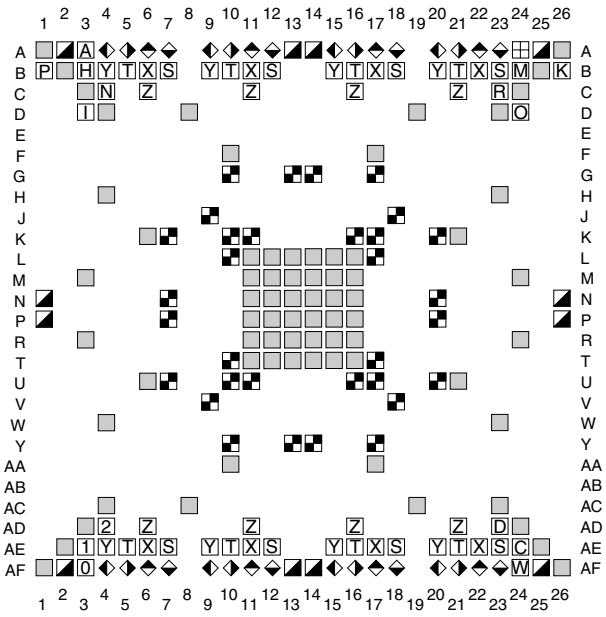

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◢	VCCAUX	◆	RXNPAD
I	TDI	■	VCCINT	◆	RXPPAD
O	TDO		GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				

ug012_c4_126c_010903

Figure 5-15: **FG676 Dedicated/Other Pins (XC2VP20, XC2VP30, XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 377 of 947

This page intentionally left blank.


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 378 of 947

FF672 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF672 Composite Pinout Diagram (XC2VP7)

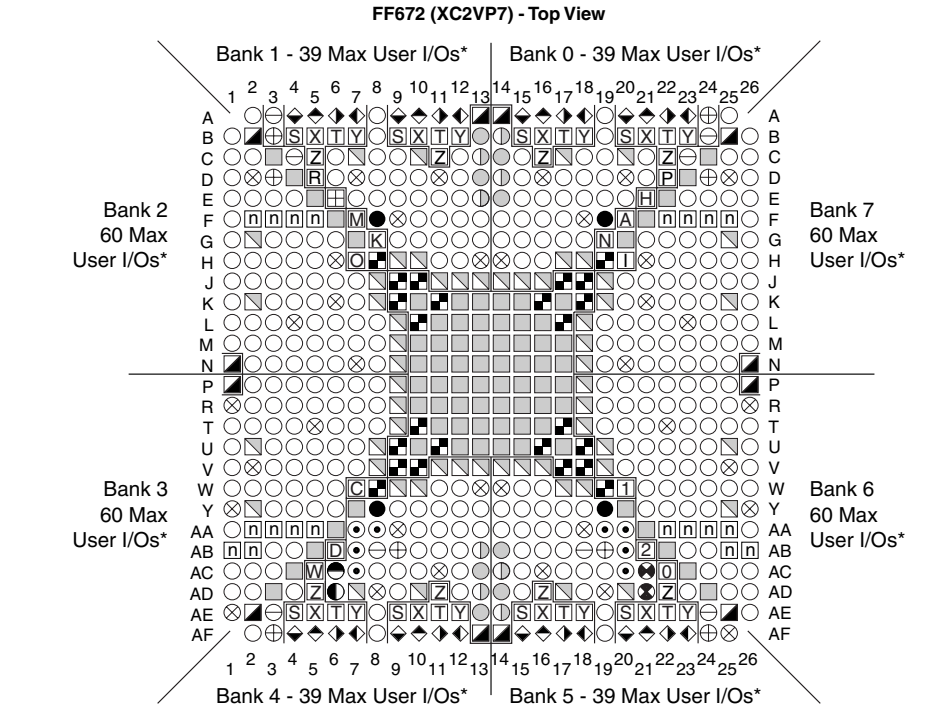

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
DIN/D0-D7	D DONE	VBATT	T AVCCAUXTX
CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
RDWR_B	H HSWAP_EN	VCCO	Z GNDA
BUSY/DOUT	K TCK	VCCAUX	RXNPAD
INIT_B	I TDI	VCCINT	RXPPAD
GCLKx (P)	O TDO	GND	TXPPAD
GCLKx (S)	M TMS	n NO CONNECT	TXNPAD
VRP	W PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_110a_082502

Figure 5-16: **FF672 Flip-Chip Fine-Pitch BGA Composite Pinout Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 379 of 947

FF672 Banked Pins (XC2VP7)

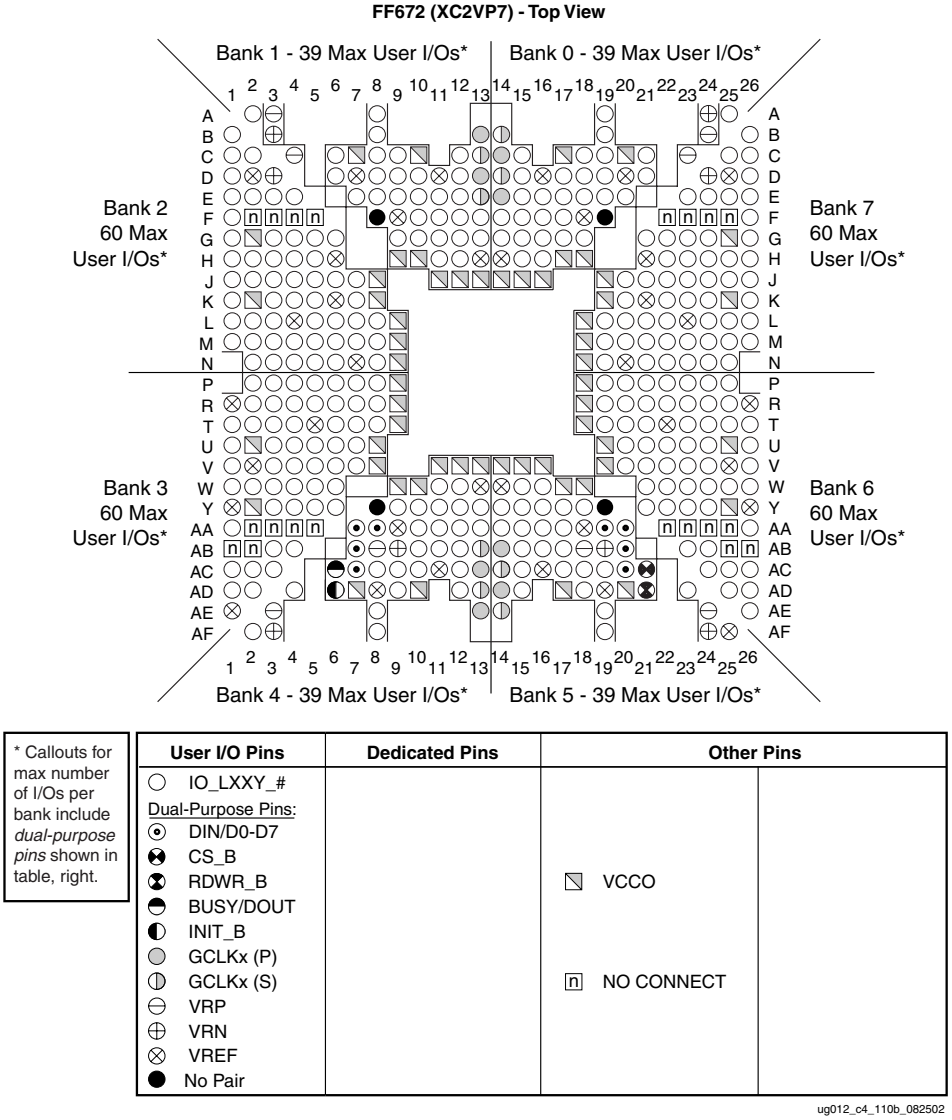



Figure 5-17: **FF672 Banked Pins (XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 380 of 947

FF672 Dedicated/Other Pins (XC2VP7)

FF672 (XC2VP7) - Top View

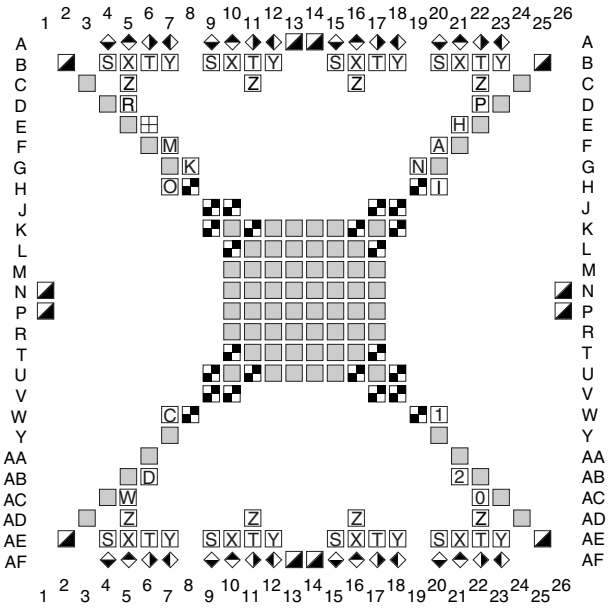

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◪	VCCAUX	◆	RXNPAD
I	TDI	◩	VCCINT	◆	RXPPAD
O	TDO	▢	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				


ug012_c4_110c_082502

Figure 5-18: **FF672 Dedicated Pins Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 381 of 947

FF672 Composite Pinout Diagram (XC2VP4)

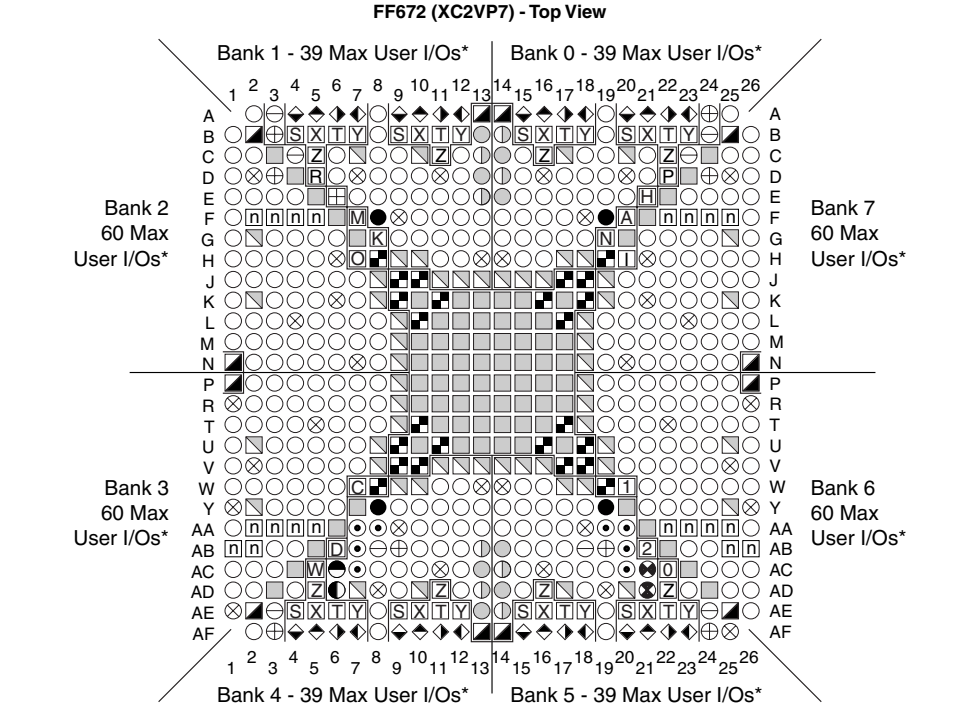

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.


User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
DIN/D0-D7	D DONE	VBATT	T AVCCAUXTX
CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
RDWR_B	H HSWAP_EN	VCCO	Z GNDA
BUSY/DOUT	K TCK	VCCAUX	RXNPAD
INIT_B	I TDI	VCCINT	RXPPAD
GCLKx (P)	O TDO	GND	TXPPAD
GCLKx (S)	M TMS	n NO CONNECT	TXNPAD
VRP	W PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_110d_082502

Figure 5-19: **FF672 Composite Pinout Diagram (XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 382/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 382 of 947

FF672 Banked Pins (XC2VP4)

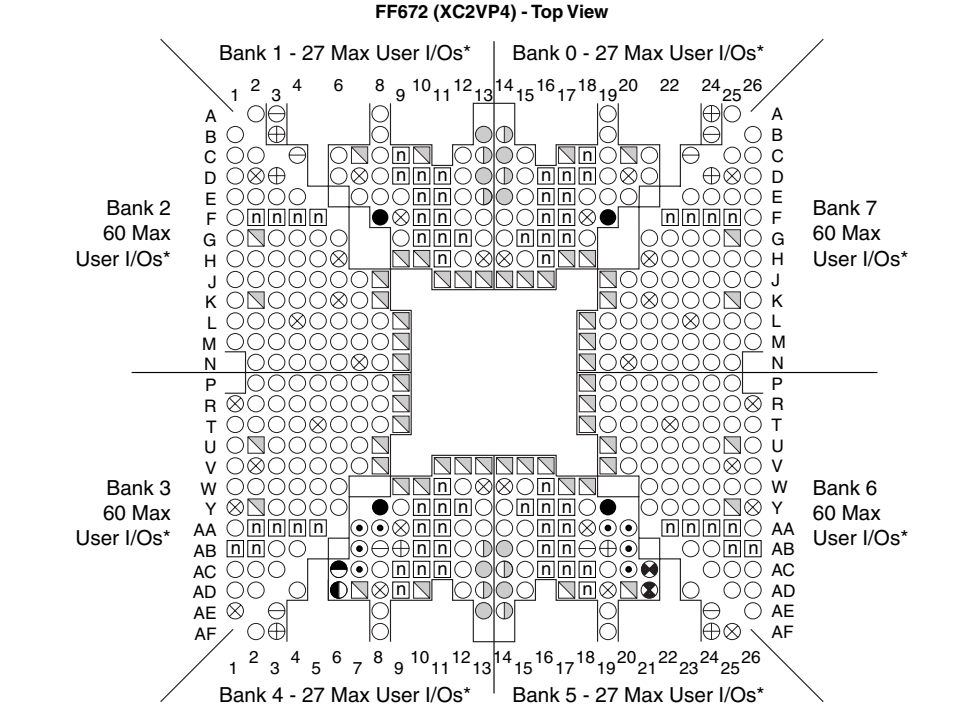

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#			
Dual-Purpose Pins:			
DIN/D0-D7			
CS_B			
RDWR_B		VCCO	
BUSY/DOUT			
INIT_B			
GCLKx (P)			
GCLKx (S)		NO CONNECT	
VRP			
VRN			
VREF			
No Pair			


ug012_c4_110e_082502

Figure 5-20: **FF672 Banked Pins (XC2VP4)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 383 of 947

FF672 Composite Pinout Diagram (XC2VP2)

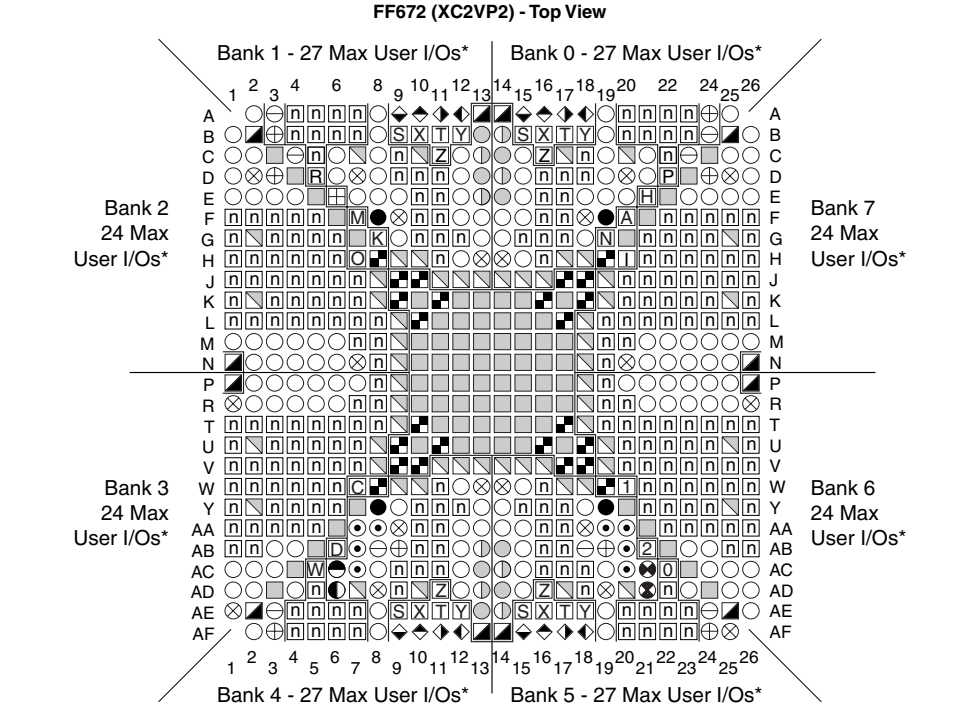

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			


ug012_c4_110g_082502

Figure 5-21: **FF672 Composite Pinout Diagram (XC2VP2)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 384/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 384 of 947

FF672 Banked Pins (XC2VP2)

FF672 (XC2VP2) - Top View

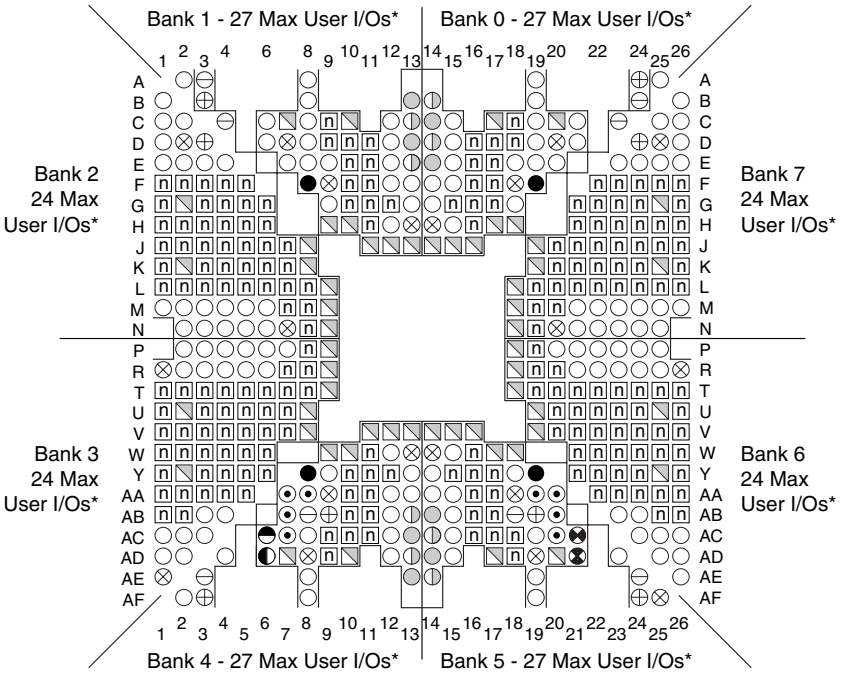

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
○ IO_LXXY_#			
Dual-Purpose Pins:			
⊙ DIN/D0-D7			
⊗ CS_B			
⧗ RDWR_B		▨ VCCO	
◓ BUSY/DOUT			
◐ INIT_B			
● GCLKx (P)			
◑ GCLKx (S)		[n] NO CONNECT	
⊖ VRP			
⊕ VRN			
⊗ VREF			
● No Pair			

ug012_c4_110h_082502


Figure 5-22: **FF672 Banked Pins (XC2VP2)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 385 of 947

FF672 Dedicated/Other Pins (XC2VP2, XC2VP4)

FF672 (XC2VP2/4) - Top View

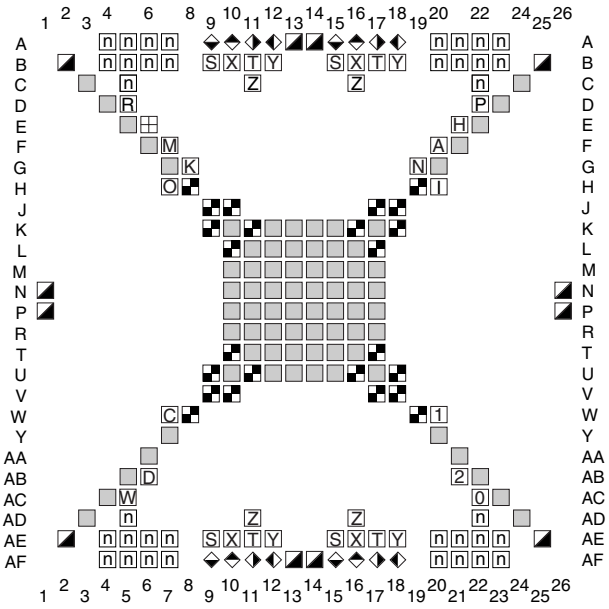

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◢	VCCAUX	◆	RXNPAD
I	TDI	■	VCCINT	◆	RXPPAD
O	TDO	□	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				

ug012_c4_110i_082502


Figure 5-23: **FF672 Dedicated/Other Pins (XC2VP2)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 386/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 386 of 947

FF896 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF896 Composite Pinout Diagram (XC2VP20, XC2VP30)

FF896 (XC2VP20/30) - Top View

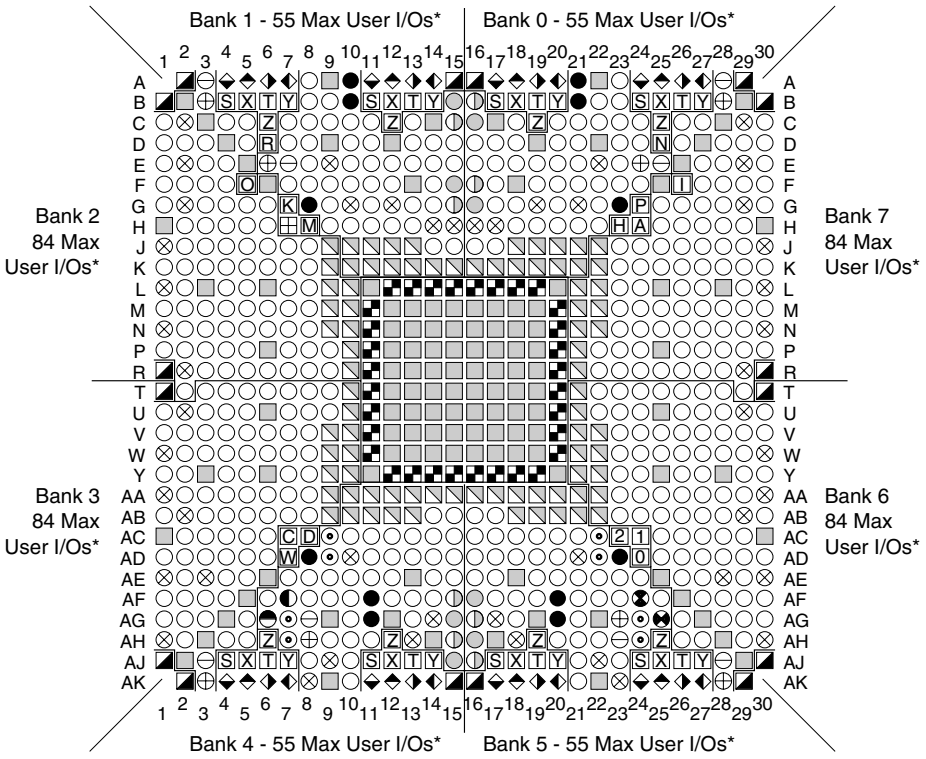

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
○ IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
⊙ DIN/D0-D7	D DONE	⊞ VBATT	T AVCCAUXTX
⊗ CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
⧗ RDWR_B	H HSWAP_EN	▨ VCCO	Z GNDA
◓ BUSY/DOUT	K TCK	◪ VCCAUX	◆ RXNPAD
◐ INIT_B	I TDI	▩ VCCINT	◆ RXPPAD
● GCLKx (P)	O TDO	□ GND	◆ TXPPAD
◑ GCLKx (S)	M TMS	n NO CONNECT	◆ TXNPAD
⊖ VRP	W PWRDWN_B		
⊕ VRN			
⊗ VREF			
● No Pair			

ug012_c4_111a_090302


Figure 5-24: **FF896 Composite Pinout Diagram (XC2VP20, XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 387 of 947

FF896 Banked Pins (XC2VP20, XC2VP30)

FF896 (XC2VP20/30) - Top View

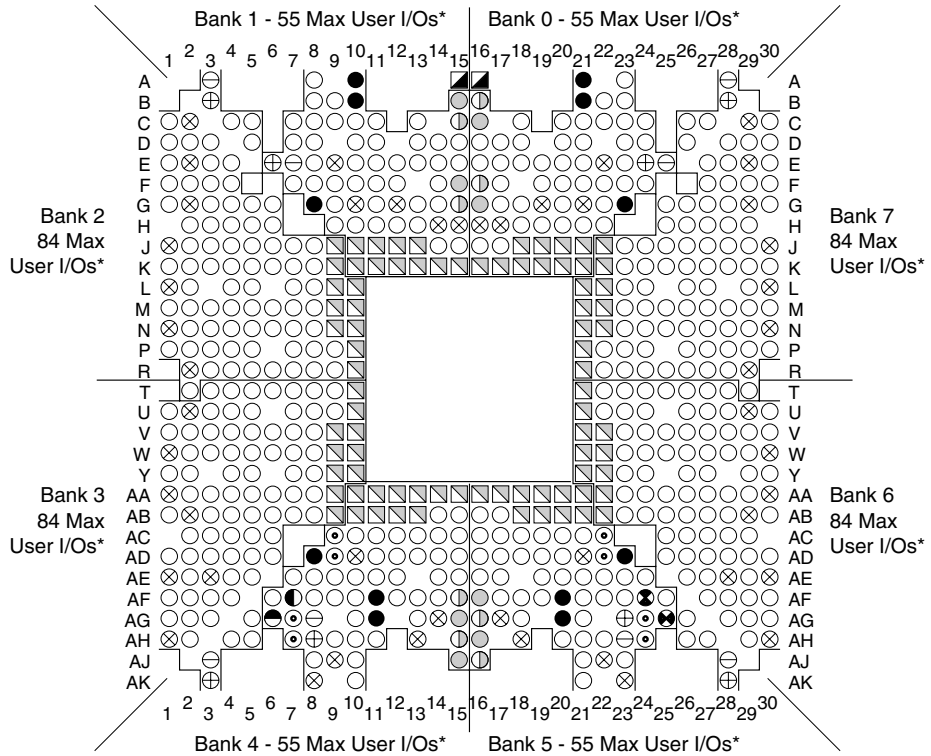

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
○ IO_LXXY_#			
Dual-Purpose Pins:			
⊙ DIN/D0-D7			
⊗ CS_B			
⧗ RDWR_B		▨ VCCO	
◓ BUSY/DOUT			
◐ INIT_B			
● GCLKx (P)			
◑ GCLKx (S)		⊓ NO CONNECT	
⊖ VRP			
⊕ VRN			
⊗ VREF			
● No Pair			


ug012_c4_111b_090302

Figure 5-25: **FF896 Banked Pins (XC2VP20, XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 388 of 947

FF896 Composite Pinout Diagram (XC2VP7)

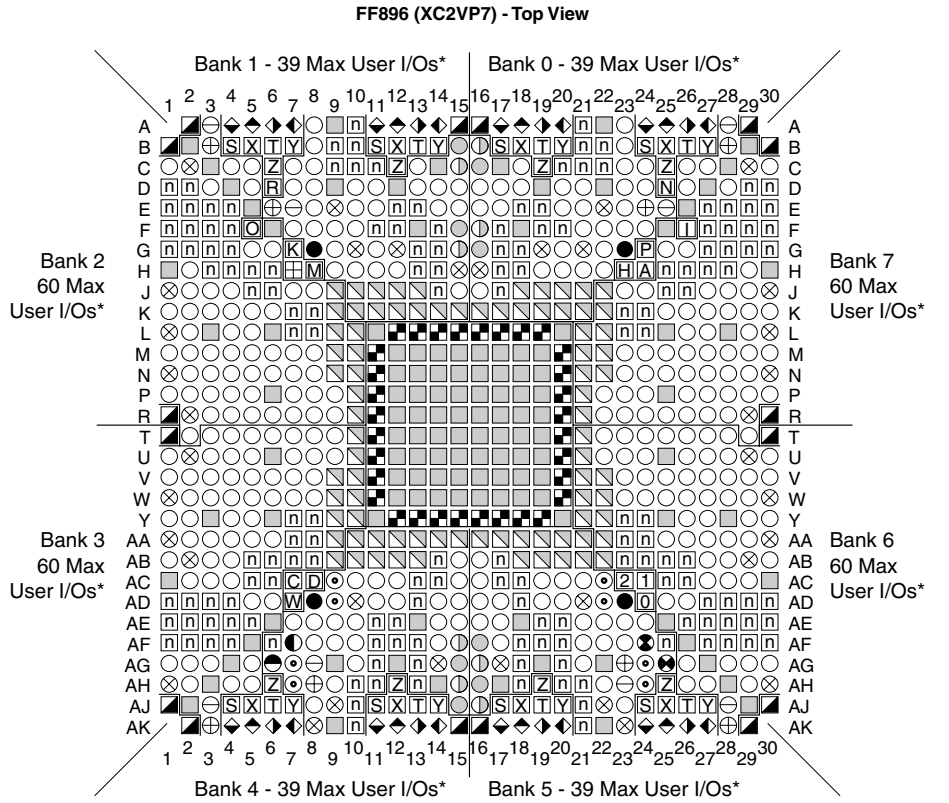

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	C CCLK	N DXN	S AVCCAUXRX
Dual-Purpose Pins:	P PROG_B	A DXP	X VTRXPAD
DIN/D0-D7	D DONE	VBATT	T AVCCAUXTX
CS_B	2 1 0 M2, M1, M0	R RSVD	Y VTTXPAD
RDWR_B	H HSWAP_EN	VCCO	Z GNDA
BUSY/DOUT	K TCK	VCCAUX	RXNPAD
INIT_B	I TDI	VCCINT	RXPPAD
GCLKx (P)	O TDO	GND	TXPPAD
GCLKx (S)	M TMS	n NO CONNECT	TXNPAD
VRP	W PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_111d_090302


Figure 5-26: **FF896 Composite Pinout Diagram (XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 389 of 947

FF896 Banked Pins (XC2VP7)

FF896 (XC2VP7) - Top View

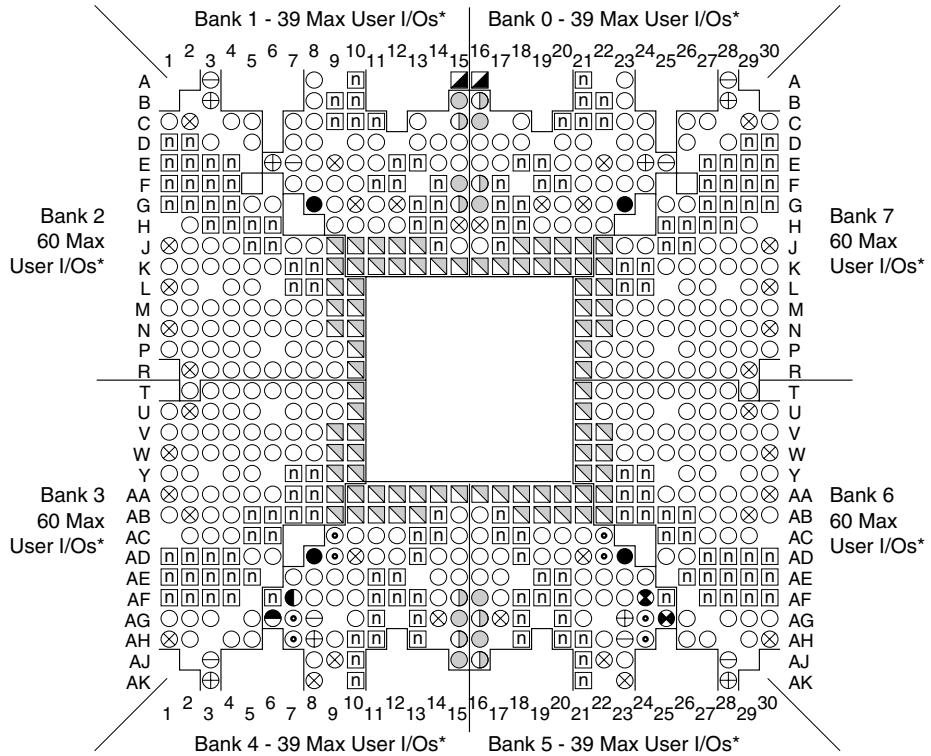

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
○ IO_LXXY_#			
Dual-Purpose Pins:			
⊙ DIN/D0-D7			
⊗ CS_B			
⧗ RDWR_B		▨ VCCO	
◓ BUSY/DOUT			
◐ INIT_B			
● GCLKx (P)			
◑ GCLKx (S)		n NO CONNECT	
⊖ VRP			
⊕ VRN			
⊗ VREF			
● No Pair			

ug012_c4_111e_090302


Figure 5-27: **FF896 Banked Pins (XC2VP7)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 390 of 947

FF896 Dedicated/Other Pins (XC2VP7, XC2VP20, XC2VP30)

FF896 (XC2VP7/20/30) - Top View

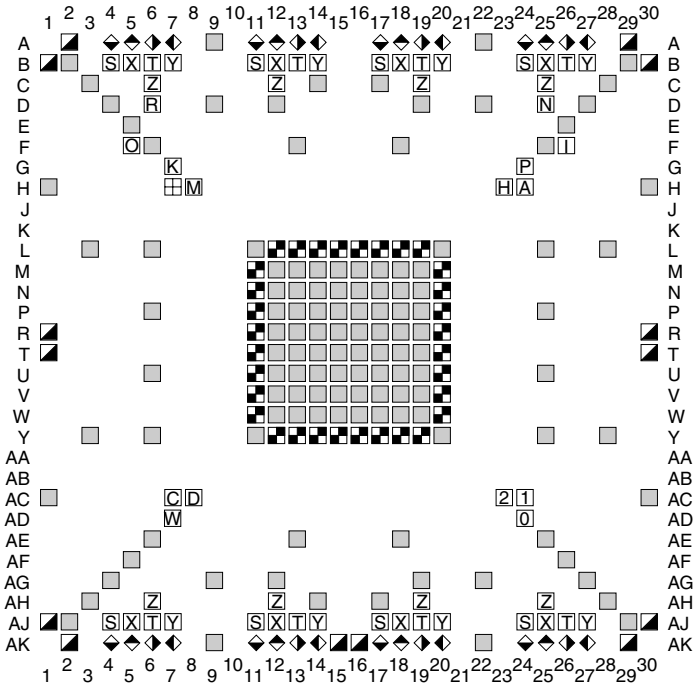

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	□	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◪	VCCAUX	◆	RXNPAD
I	TDI	◩	VCCINT	◆	RXPPAD
O	TDO	▣	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				

ug012_c4_111c _082502

Figure 5-28: **FF896 Dedicated/Other Pins (XC2VP7, XC2VP20, XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 391 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 392 of 947

FF1152 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF1152 Composite Pinout Diagram (XC2VP50)

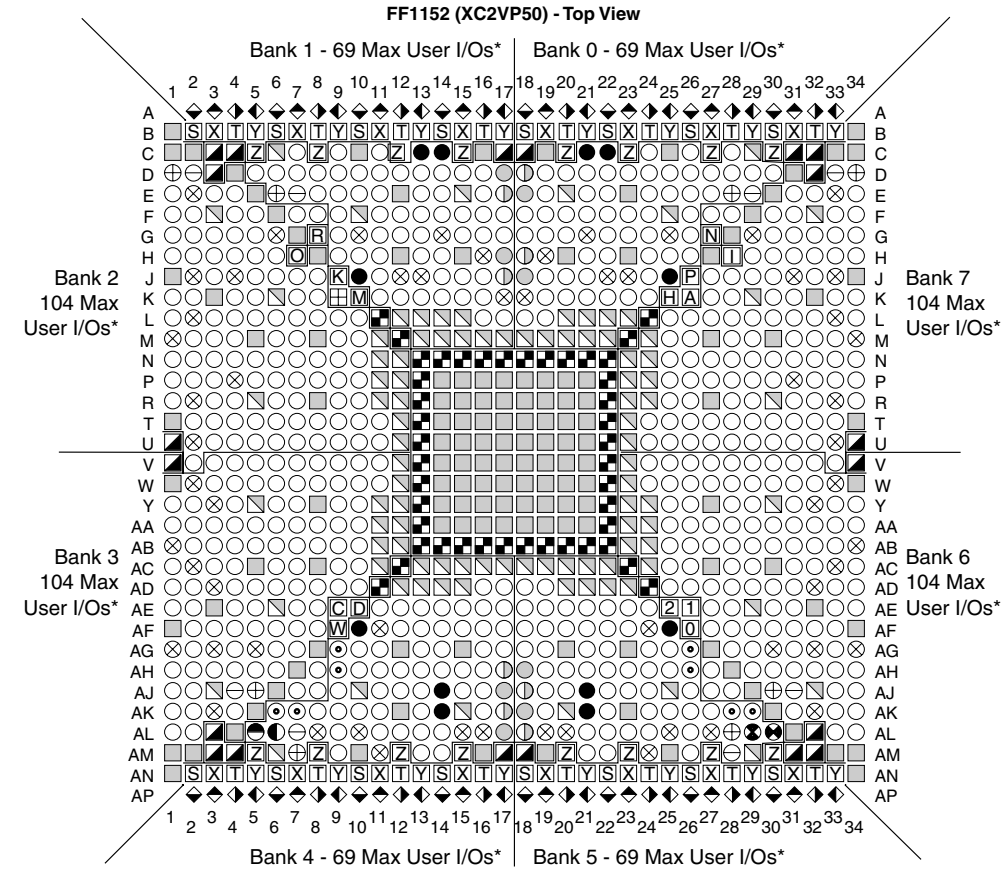



Figure 5-29: **FF1152 Composite Pinout Diagram (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 393 of 947

FF1152 Dedicated/Other Pins (XC2VP50)

FF1152 (XC2VP50) - Top View

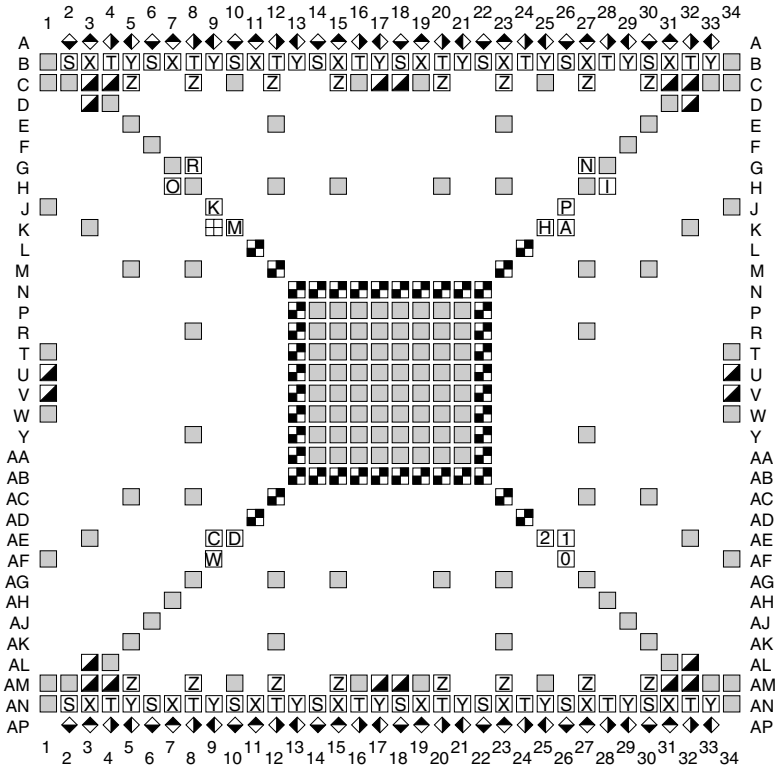

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE		VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK		VCCAUX		RXNPAD
I	TDI		VCCINT		RXPPAD
O	TDO		GND		TXPPAD
M	TMS	n	NO CONNECT		TXNPAD
W	PWRDWN_B				


ug012_c4_112c_082302

Figure 5-30: **FF1152 Dedicated/Other Pins (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 394 of 947

FF1152 Composite Pinout Diagram (XC2VP40)

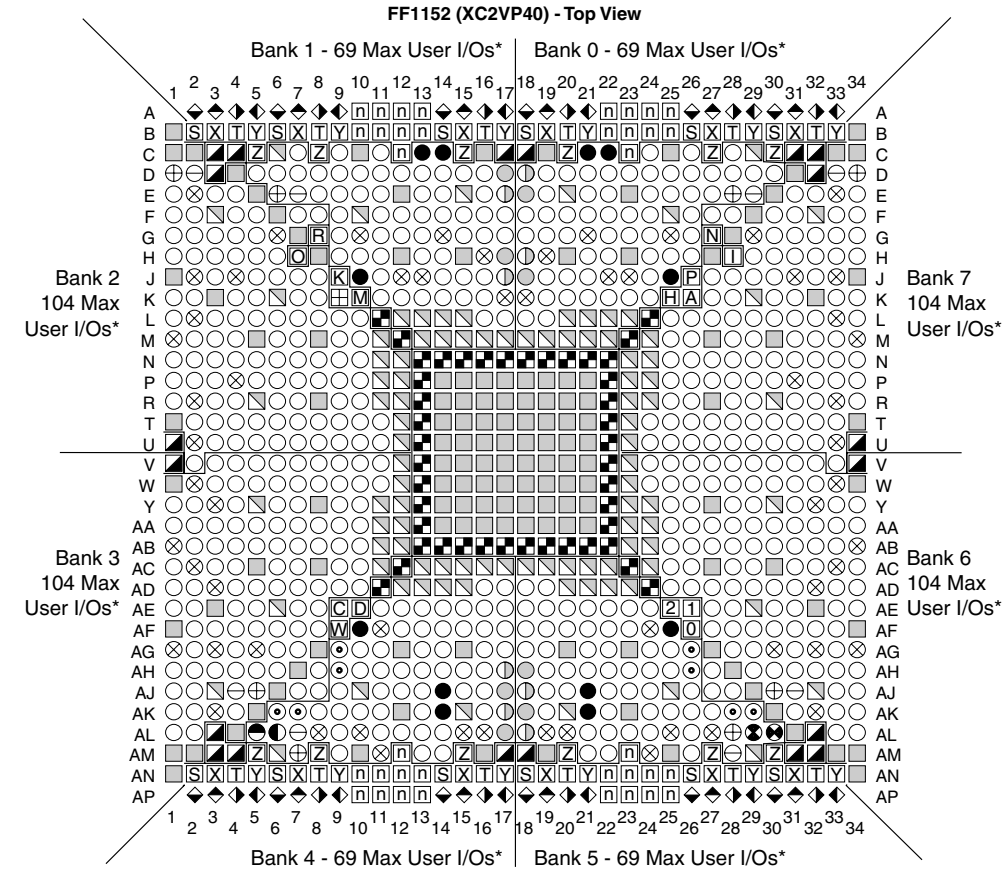

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_112d_082802

Figure 5-31: **FF1152 Composite Pinout Diagram (XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 395 of 947

FF1152 Banked Pins (XC2VP40, XC2VP50)

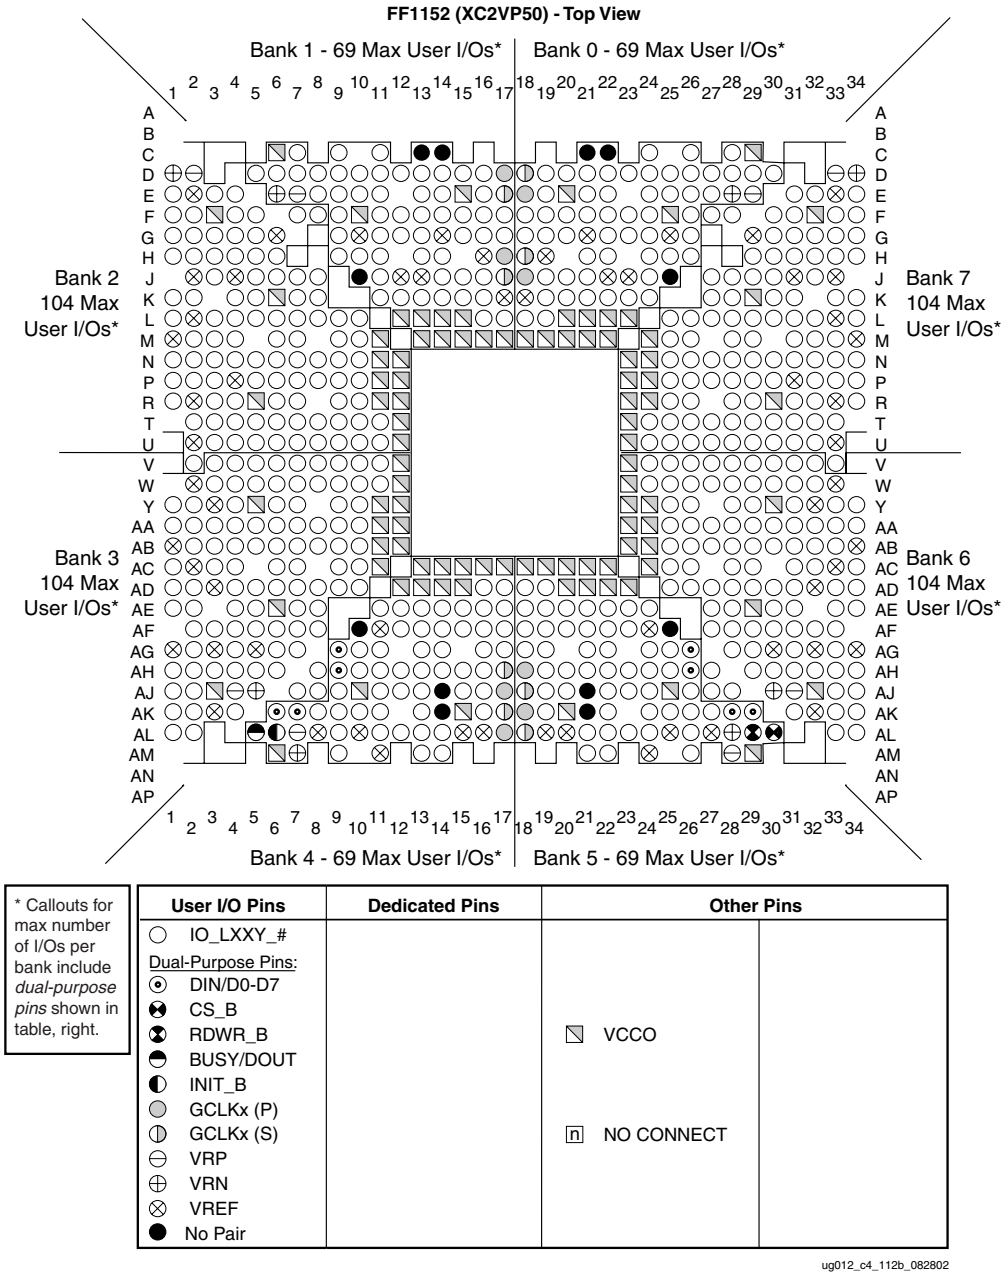



Figure 5-32: **FF1152 Banked Pins (XC2VP40, XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 396 of 947

FF1152 Dedicated/Other Pins (XC2VP40)

FF1152 (XC2VP40) - Top View

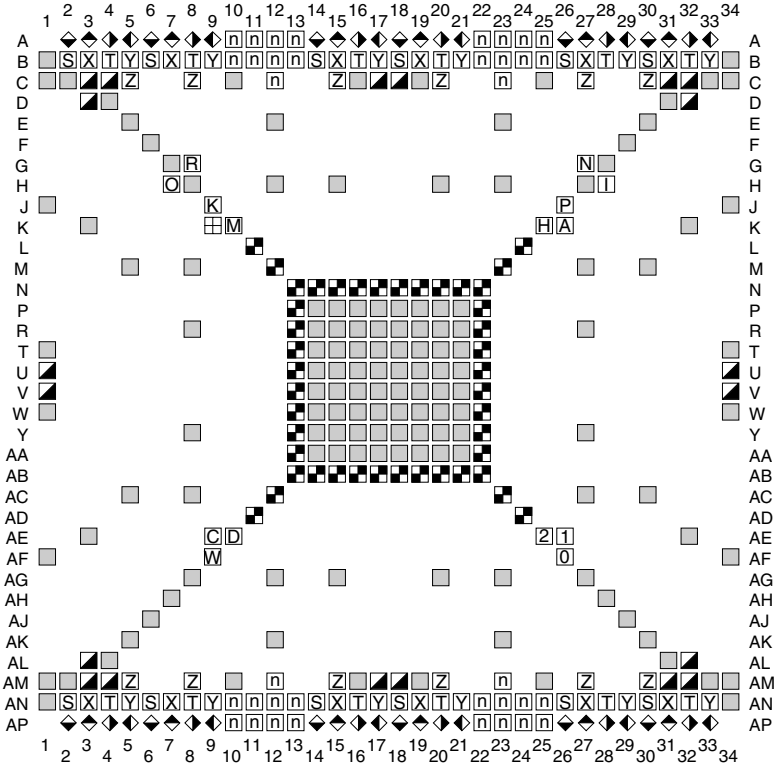

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◪	VCCAUX	◆	RXNPAD
I	TDI	◩	VCCINT	◆	RXPPAD
O	TDO	□	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				


ug012_c4_112f_082302

Figure 5-33: **FF1152 Dedicated/Other Pins (XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 397 of 947

FF1152 Composite Pinout Diagram (XC2VP30)

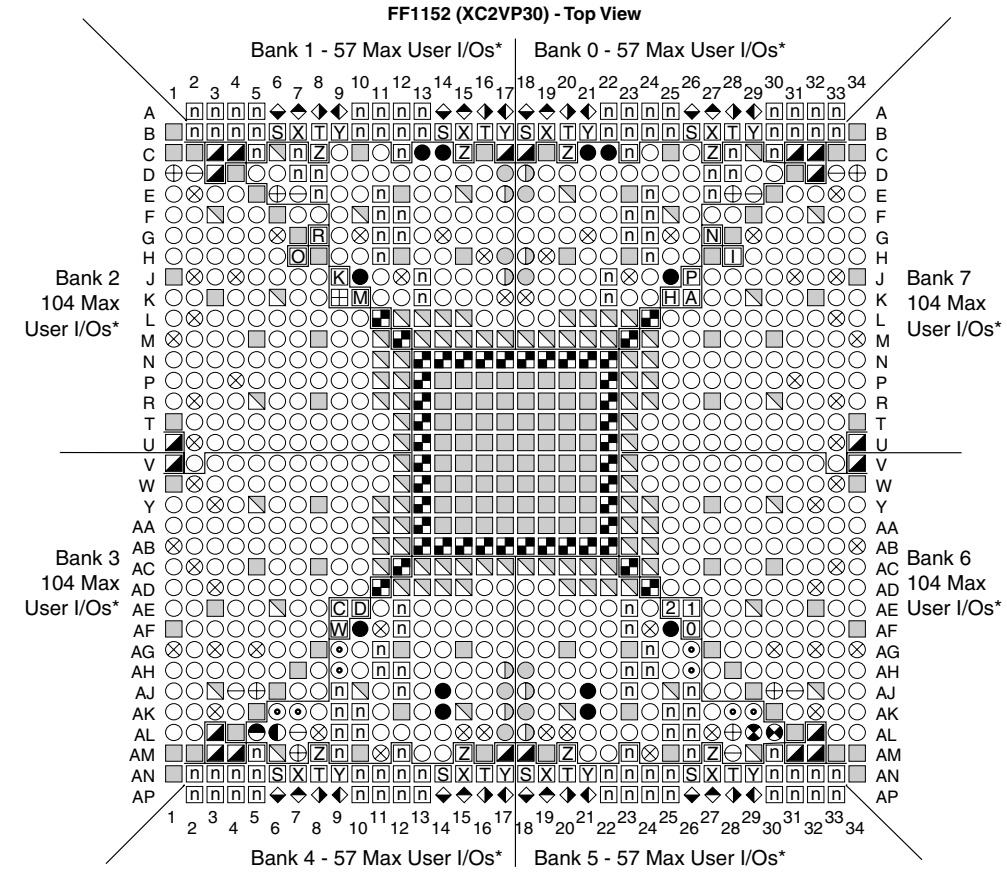

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_112g_082802

Figure 5-34: **FF1152 Composite Pinout Diagram (XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 398/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 398 of 947

FF1152 Banked Pins (XC2VP30)


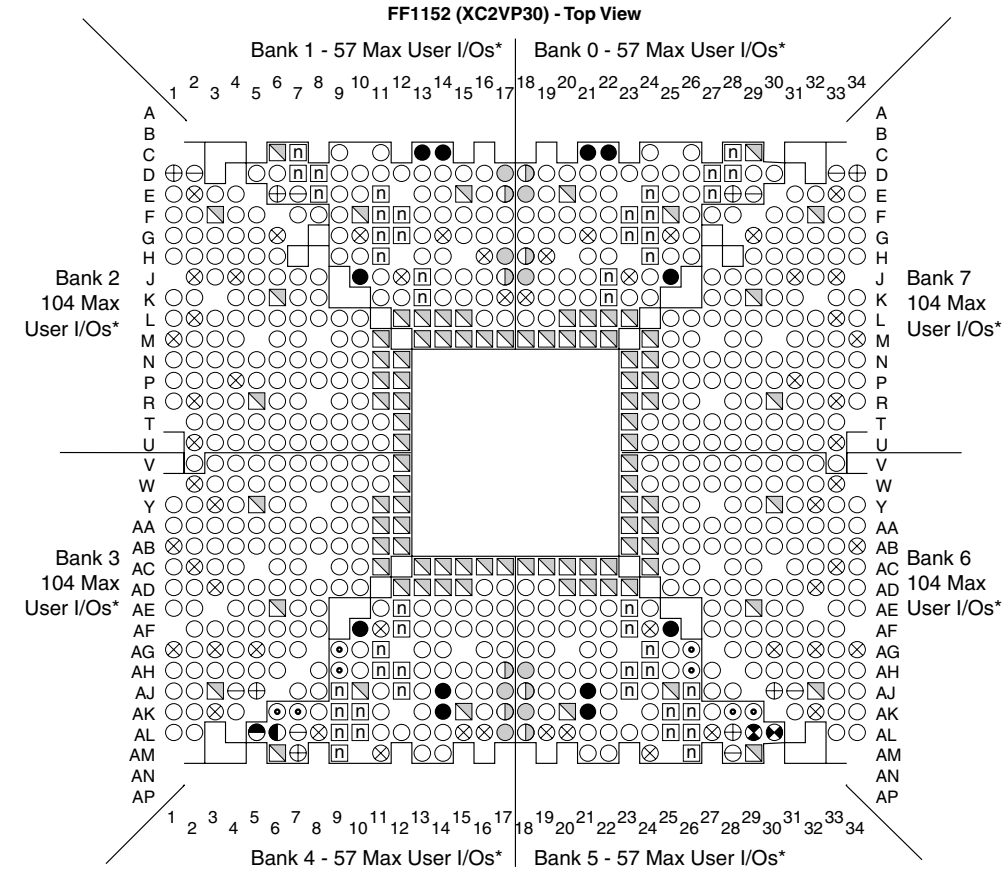


Figure 5-35: **FF1152 Banked Pins (XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 399/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 399 of 947

FF1152 Dedicated/Other Pins (XC2VP30)

FF1152 (XC2VP30) - Top View

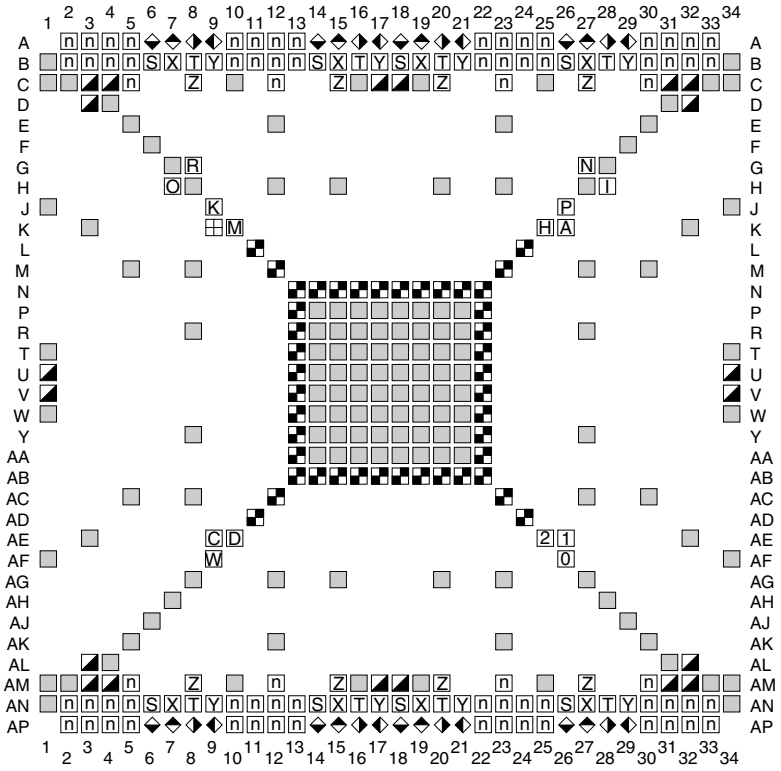

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◢	VCCAUX	◆	RXNPAD
I	TDI	■	VCCINT	◆	RXPPAD
O	TDO	□	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				


ug012_c4_112i_082302

Figure 5-36: **FF1152 Dedicated/Other Pins (XC2VP30)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 400 of 947

FF1152 Composite Pinout Diagram (XC2VP20)

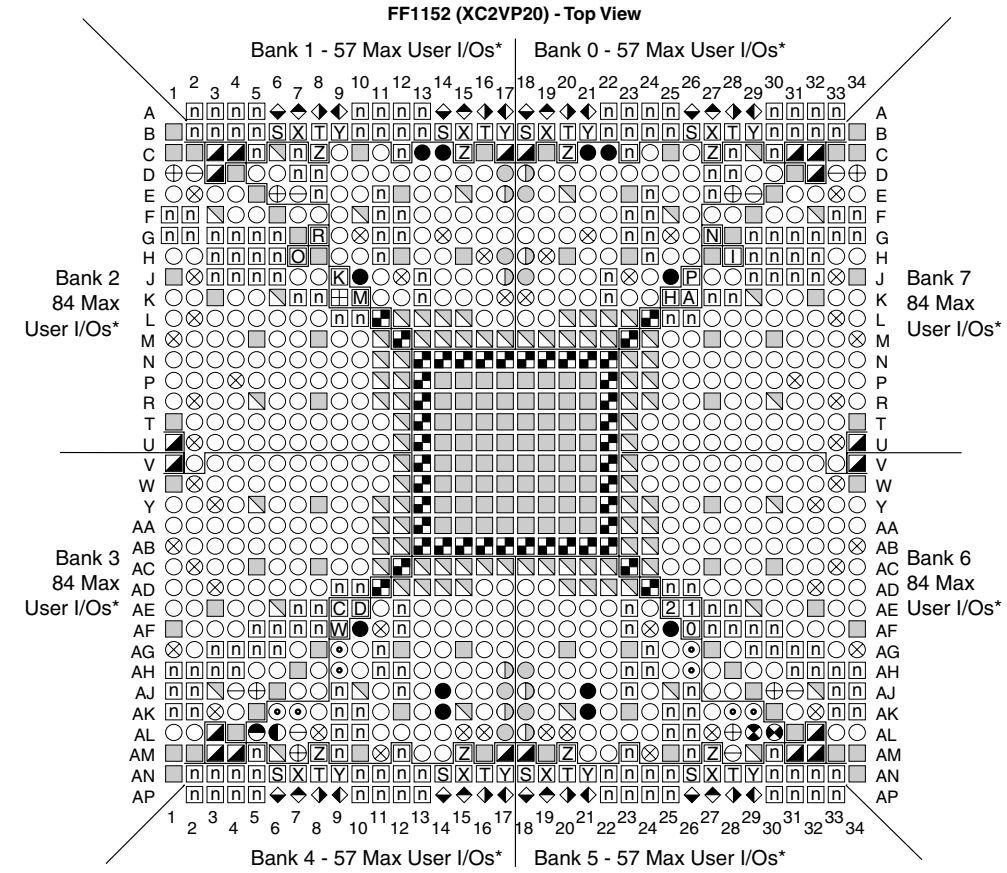

* Callouts for max number of I/Os per bank include *dual-purpose pins* shown in table, right.

User I/O Pins	Dedicated Pins	Other Pins	
IO_LXXY_#	CCLK	DXN	AVCCAUXRX
Dual-Purpose Pins:	PROG_B	DXP	VTRXPAD
DIN/D0-D7	DONE	VBATT	AVCCAUXTX
CS_B	M2, M1, M0	RSVD	VTTXPAD
RDWR_B	HSWAP_EN	VCCO	GNDA
BUSY/DOUT	TCK	VCCAUX	RXNPAD
INIT_B	TDI	VCCINT	RXPPAD
GCLKx (P)	TDO	GND	TXPPAD
GCLKx (S)	TMS	NO CONNECT	TXNPAD
VRP	PWRDWN_B		
VRN			
VREF			
No Pair			

ug012_c4_112j_011603

Figure 5-37: **FF1152 Composite Pinout Diagram (XC2VP20)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 401/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 401 of 947

FF1152 Banked Pins (XC2VP20)

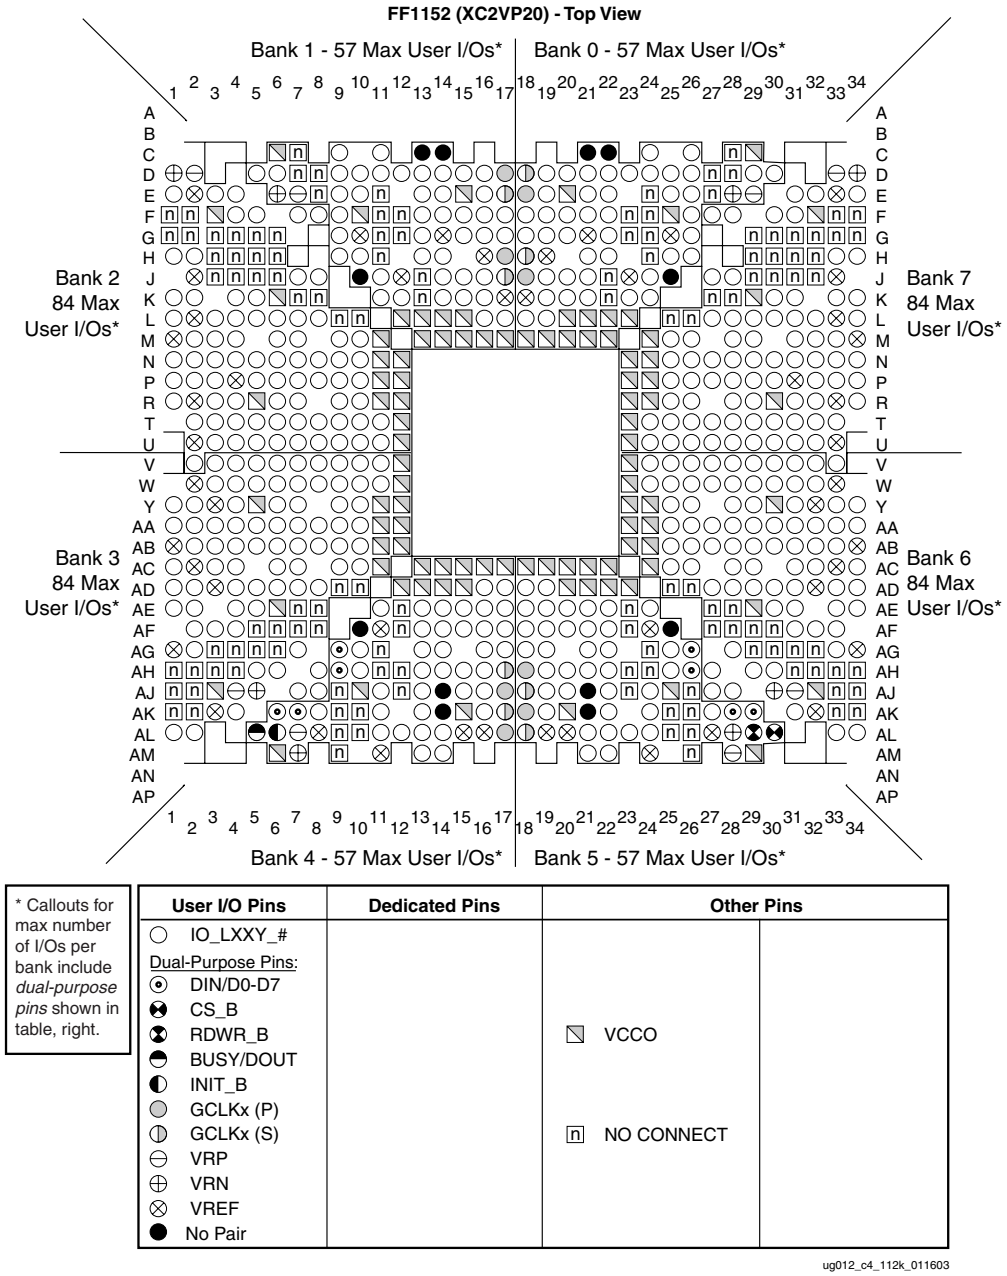



Figure 5-38: **FF1152 Banked Pins (XC2VP20)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 402 of 947

FF1152 Dedicated/Other Pins (XC2VP20)

FF1152 (XC2VP20) - Top View

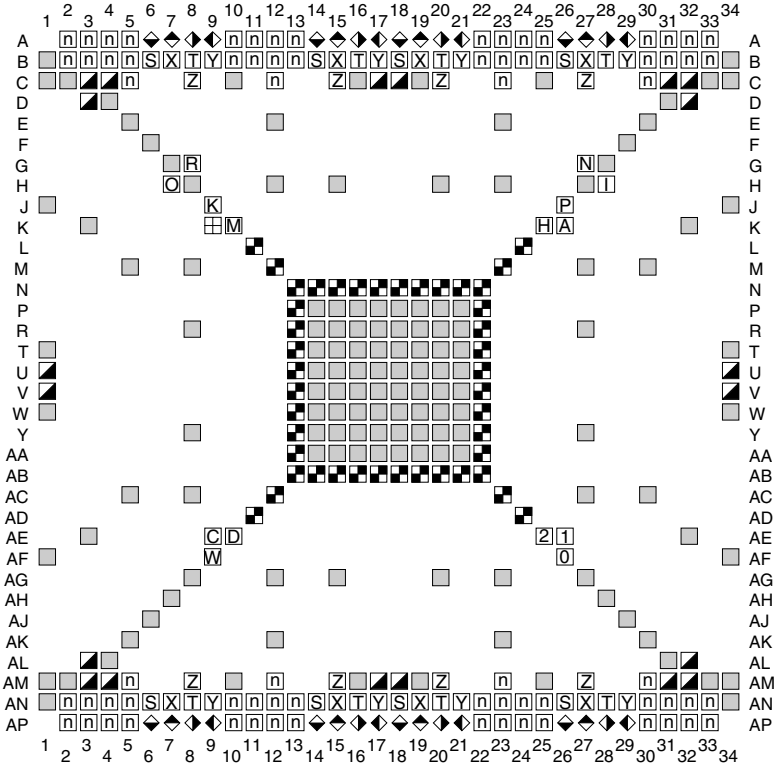

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE	⊞	VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK	◪	VCCAUX	◆	RXNPAD
I	TDI	◩	VCCINT	◆	RXPPAD
O	TDO	□	GND	◆	TXPPAD
M	TMS	n	NO CONNECT	◆	TXNPAD
W	PWRDWN_B				

ug012_c4_112l_082302

Figure 5-39: **FF1152 Dedicated/Other Pins (XC2VP20)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 403 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 404 of 947

FF1148 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF1148 Composite Pinout Diagram (XC2VP50)

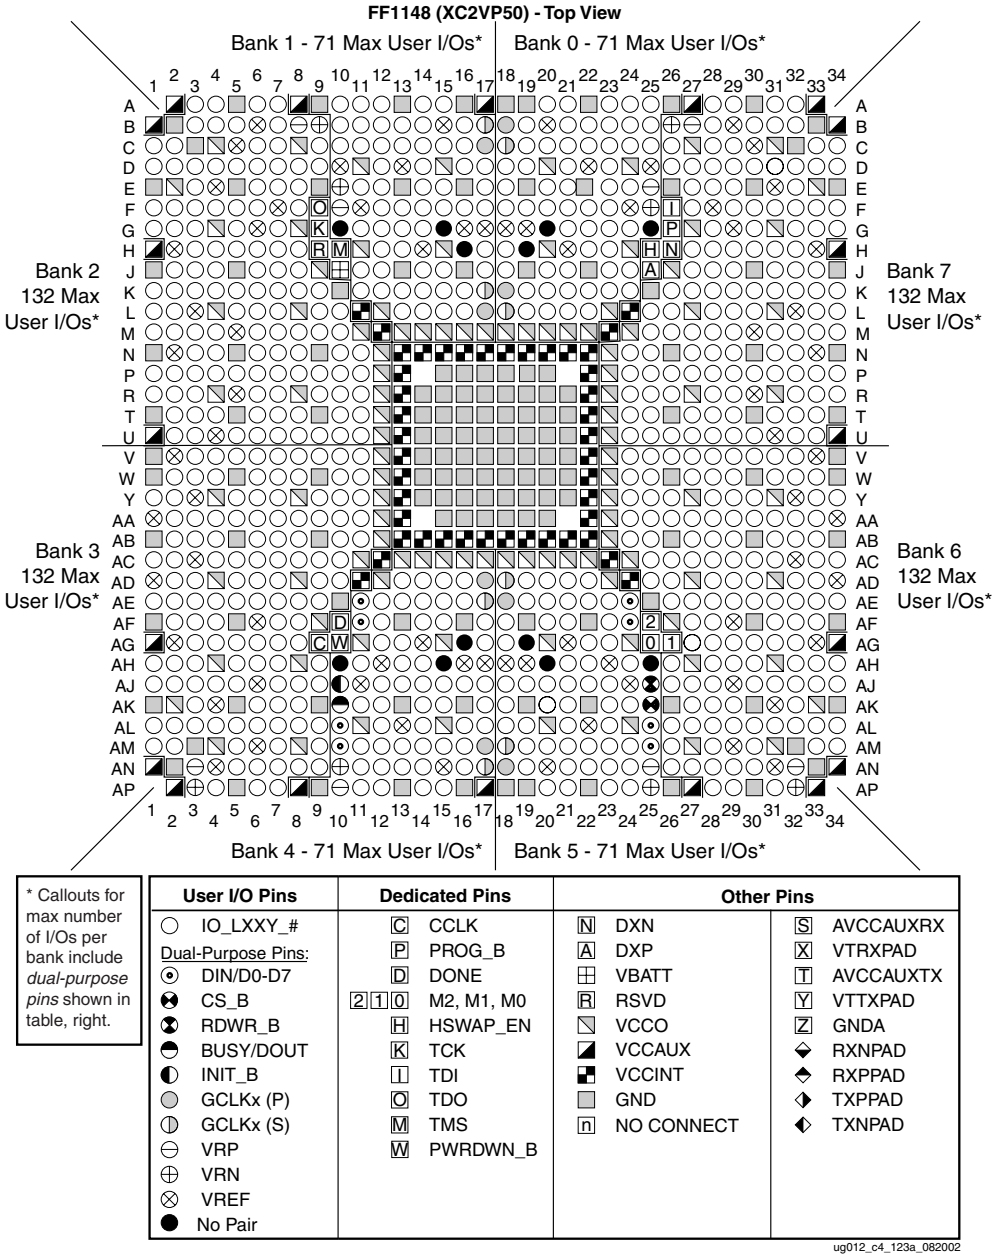


Figure 5-40: **FF1148 Composite Pinout Diagram (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 405 of 947

FF1148 Banked Pins (XC2VP50)

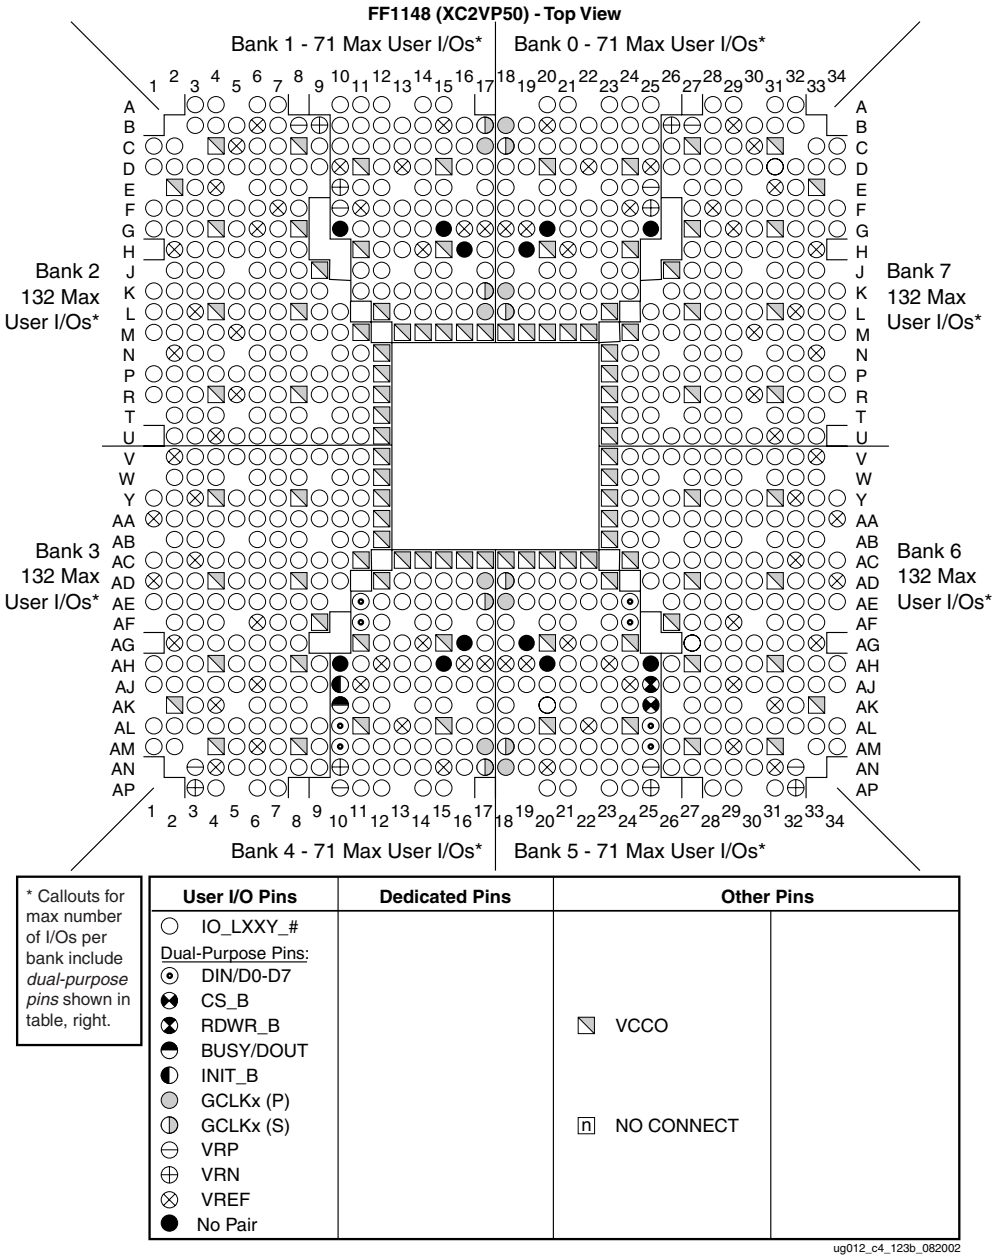


Figure 5-41: **FF1148 Banked Pins (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 406 of 947

FF1148 Composite Pinout Diagram (XC2VP40)

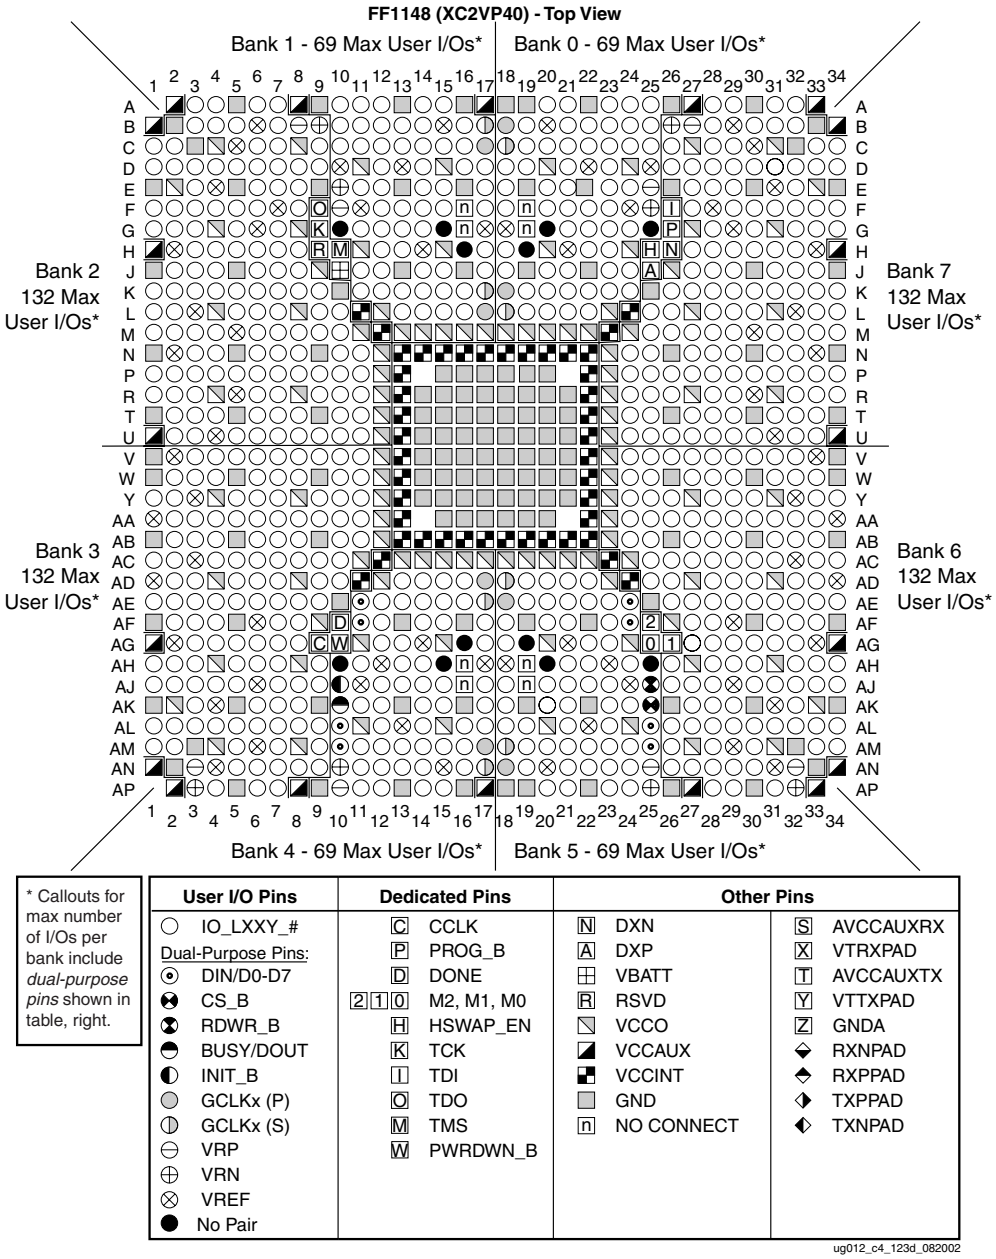


Figure 5-42: **FF1148 Composite Pinout Diagram (XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 407/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 407 of 947

FF1148 Banked Pins (XC2VP40)


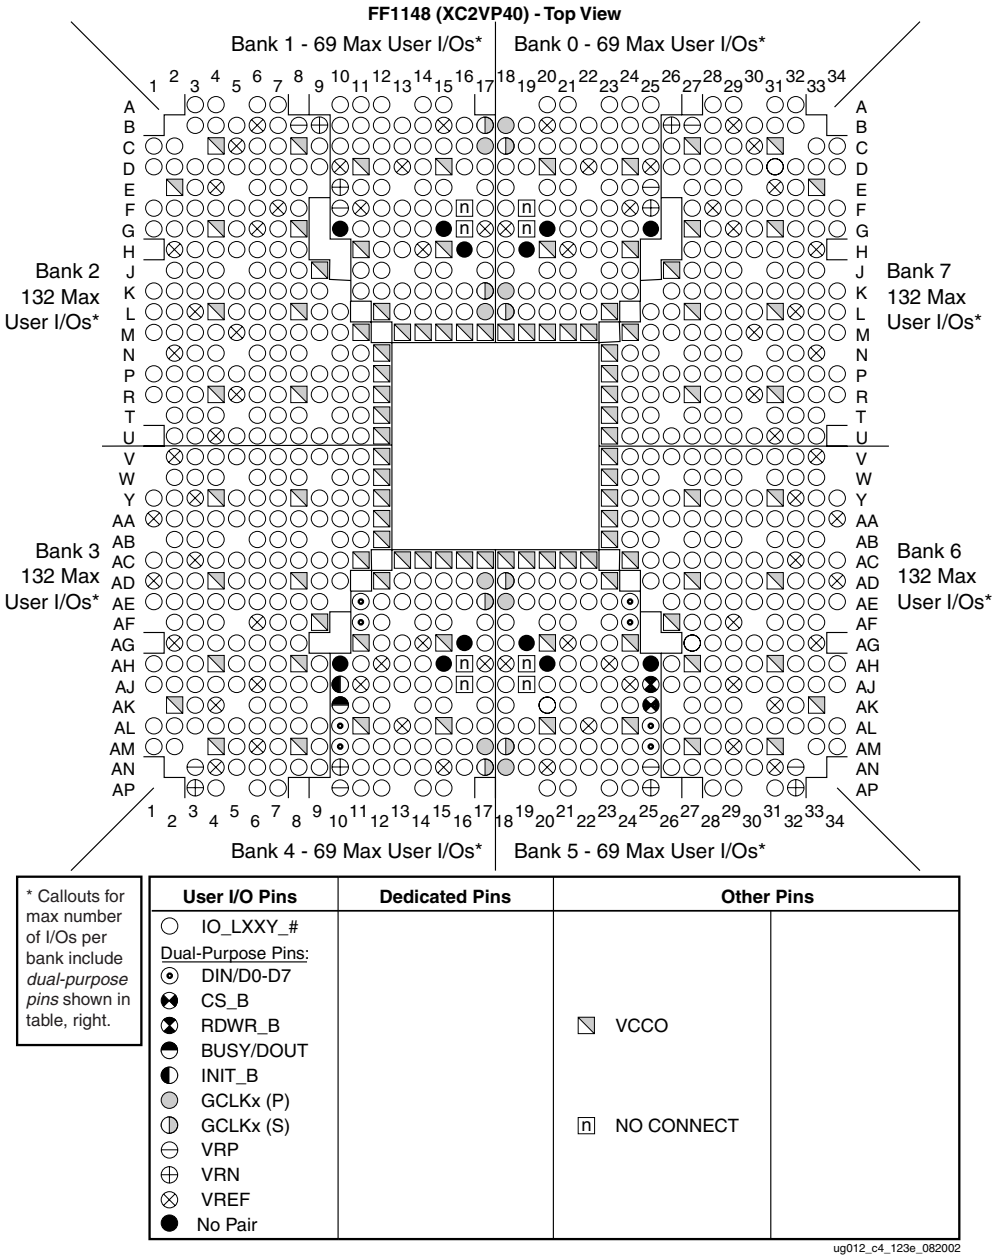


Figure 5-43: **FF1148 Banked Pins (XC2VP40)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 408/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 408 of 947

FF1148 Dedicated/Other Pins (XC2VP40, XC2VP50)

FF1148 (XC2VP40/50) - Top View

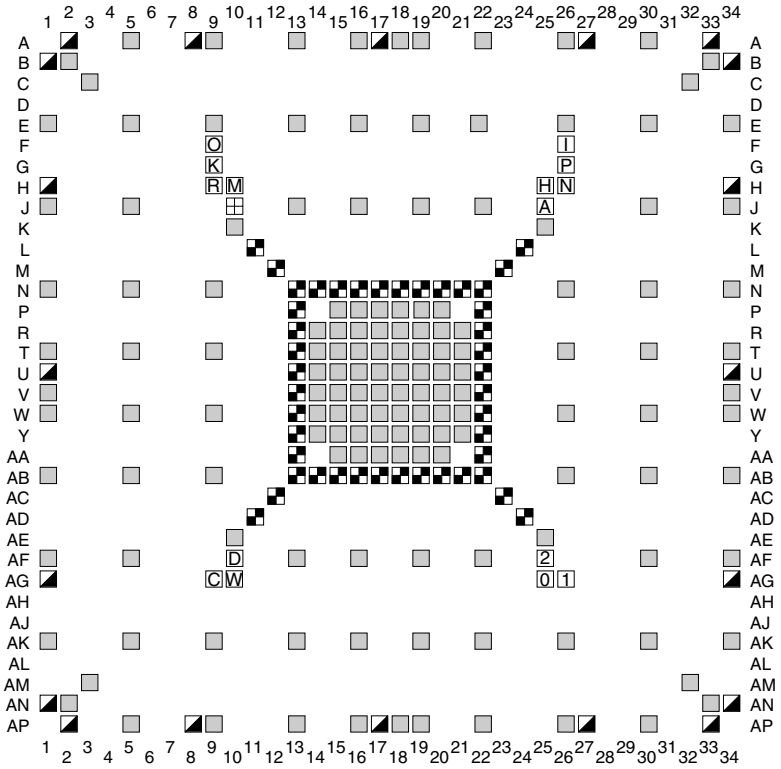

Dedicated Pins		Other Pins			
C	CCLK	N	DXN	S	AVCCAUXRX
P	PROG_B	A	DXP	X	VTRXPAD
D	DONE		VBATT	T	AVCCAUXTX
2 1 0	M2, M1, M0	R	RSVD	Y	VTTXPAD
H	HSWAP_EN			Z	GNDA
K	TCK		VCCAUX		RXNPAD
I	TDI		VCCINT		RXPPAD
O	TDO		GND		TXPPAD
M	TMS	n	NO CONNECT		TXNPAD
W	PWRDWN_B				

ug012_c4_123f_082002

Figure 5-44: **FF1148 Dedicated/Other Pins (XC2VP40, XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 409 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 410 of 947

FF1517 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF1517 Composite Pinout Diagram (XC2VP70)

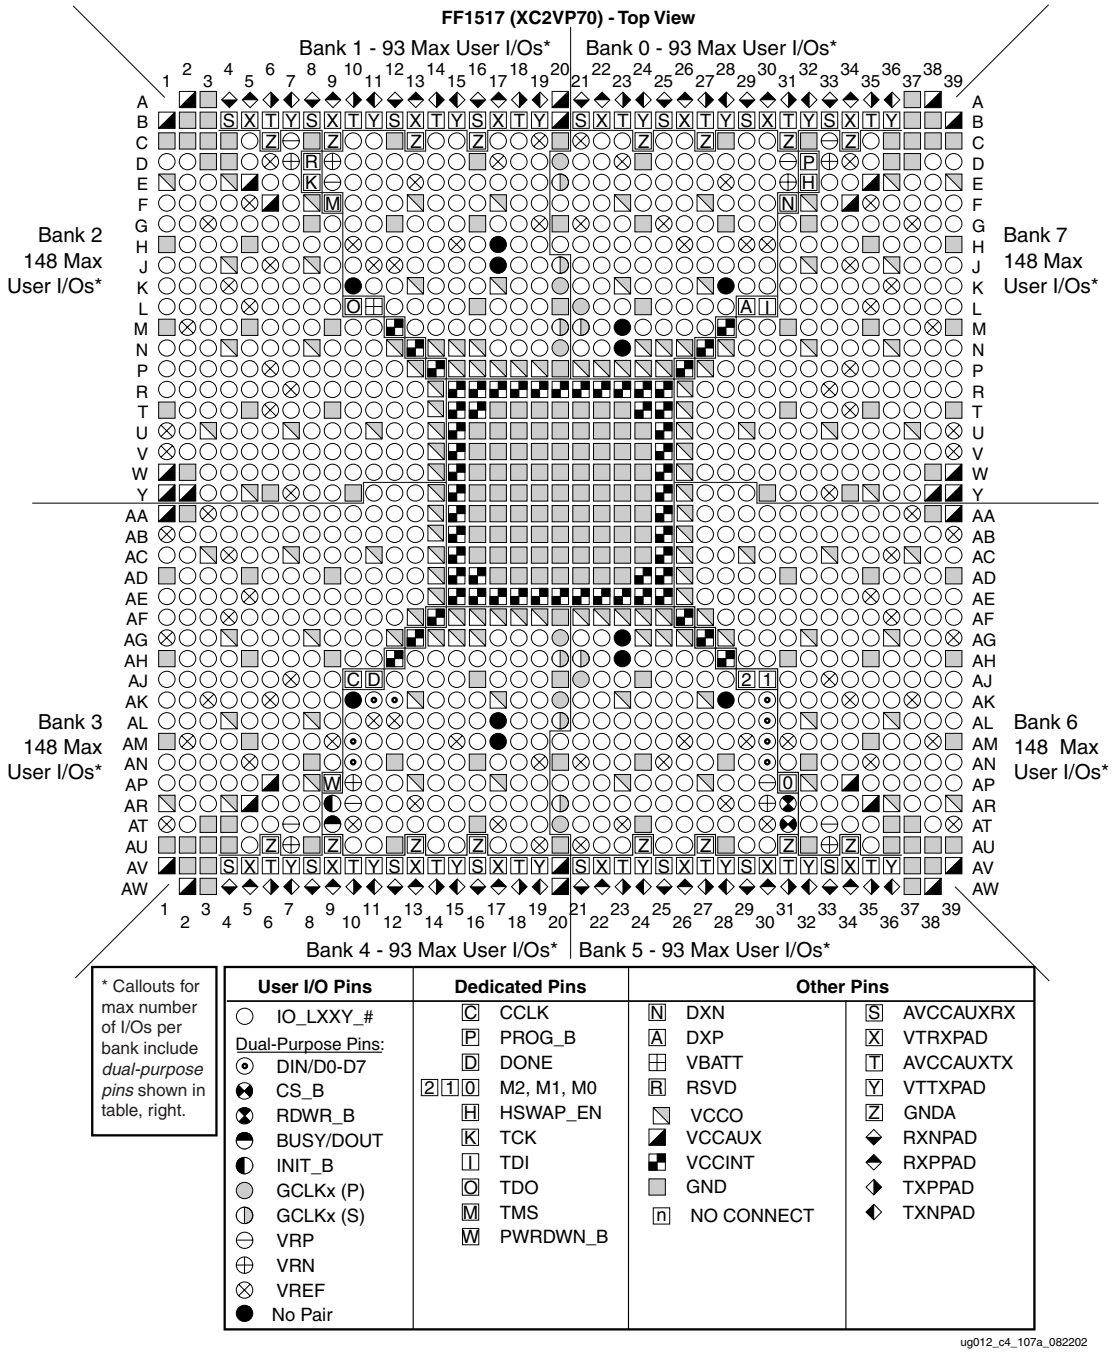


Figure 5-45: **FF1517 Composite Pinout Diagram (XC2VP70)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 411/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 411 of 947

FF1517 Banked Pins (XC2VP70)

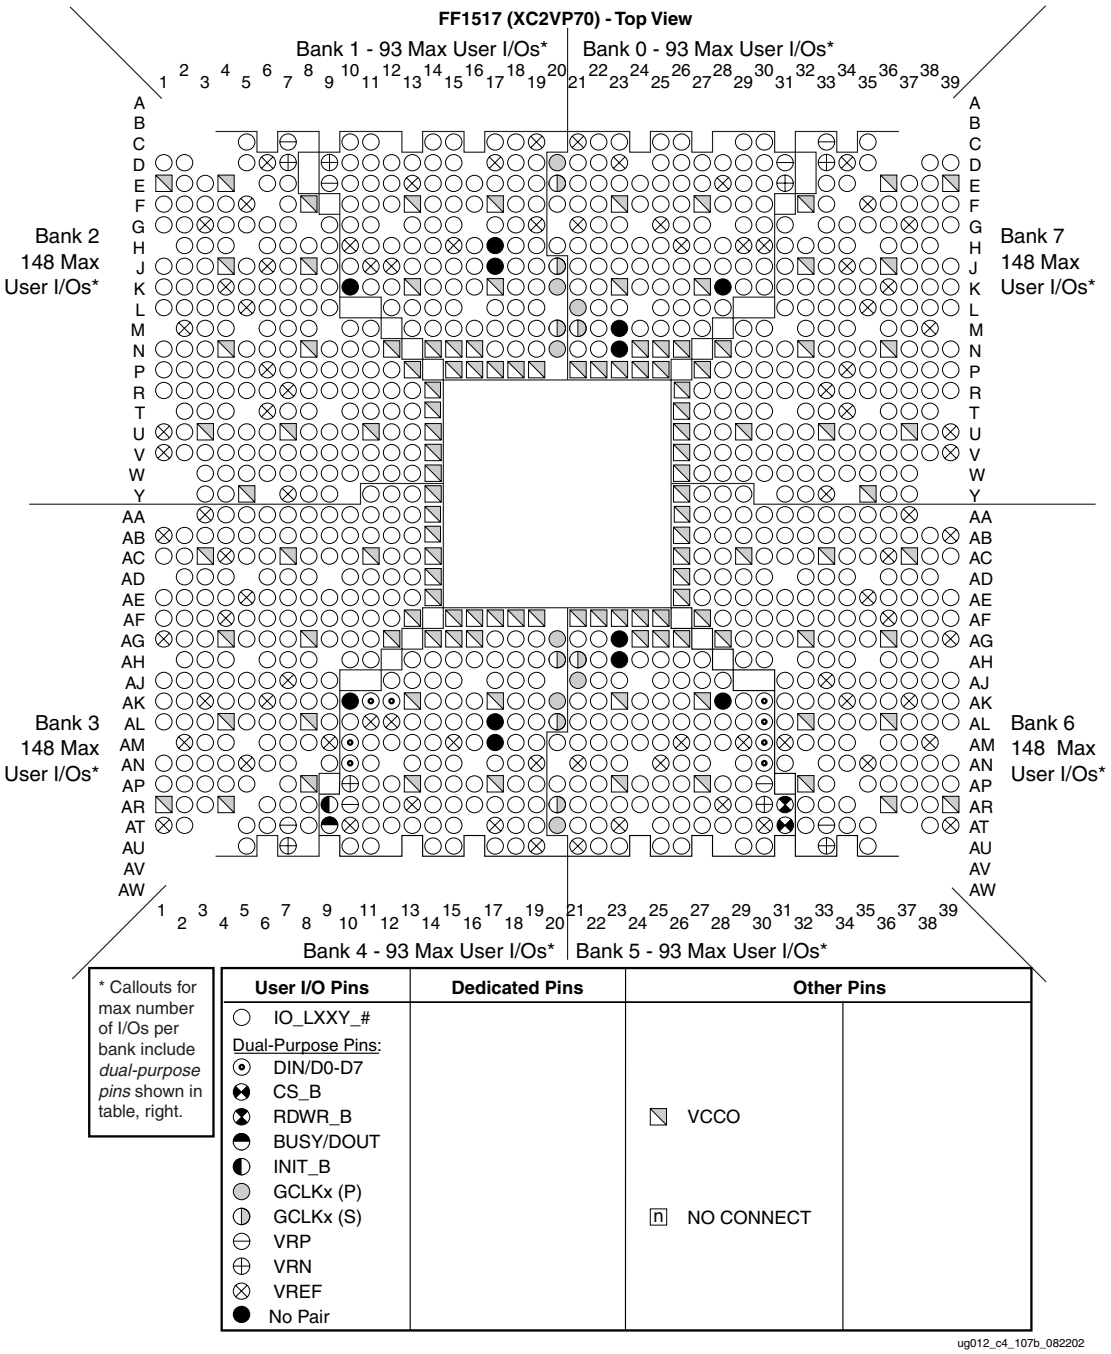


Figure 5-46: **FF1517 Banked Pins (XC2VP70)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 412 of 947

FF1517 Composite Pinout Diagram (XC2VP50)

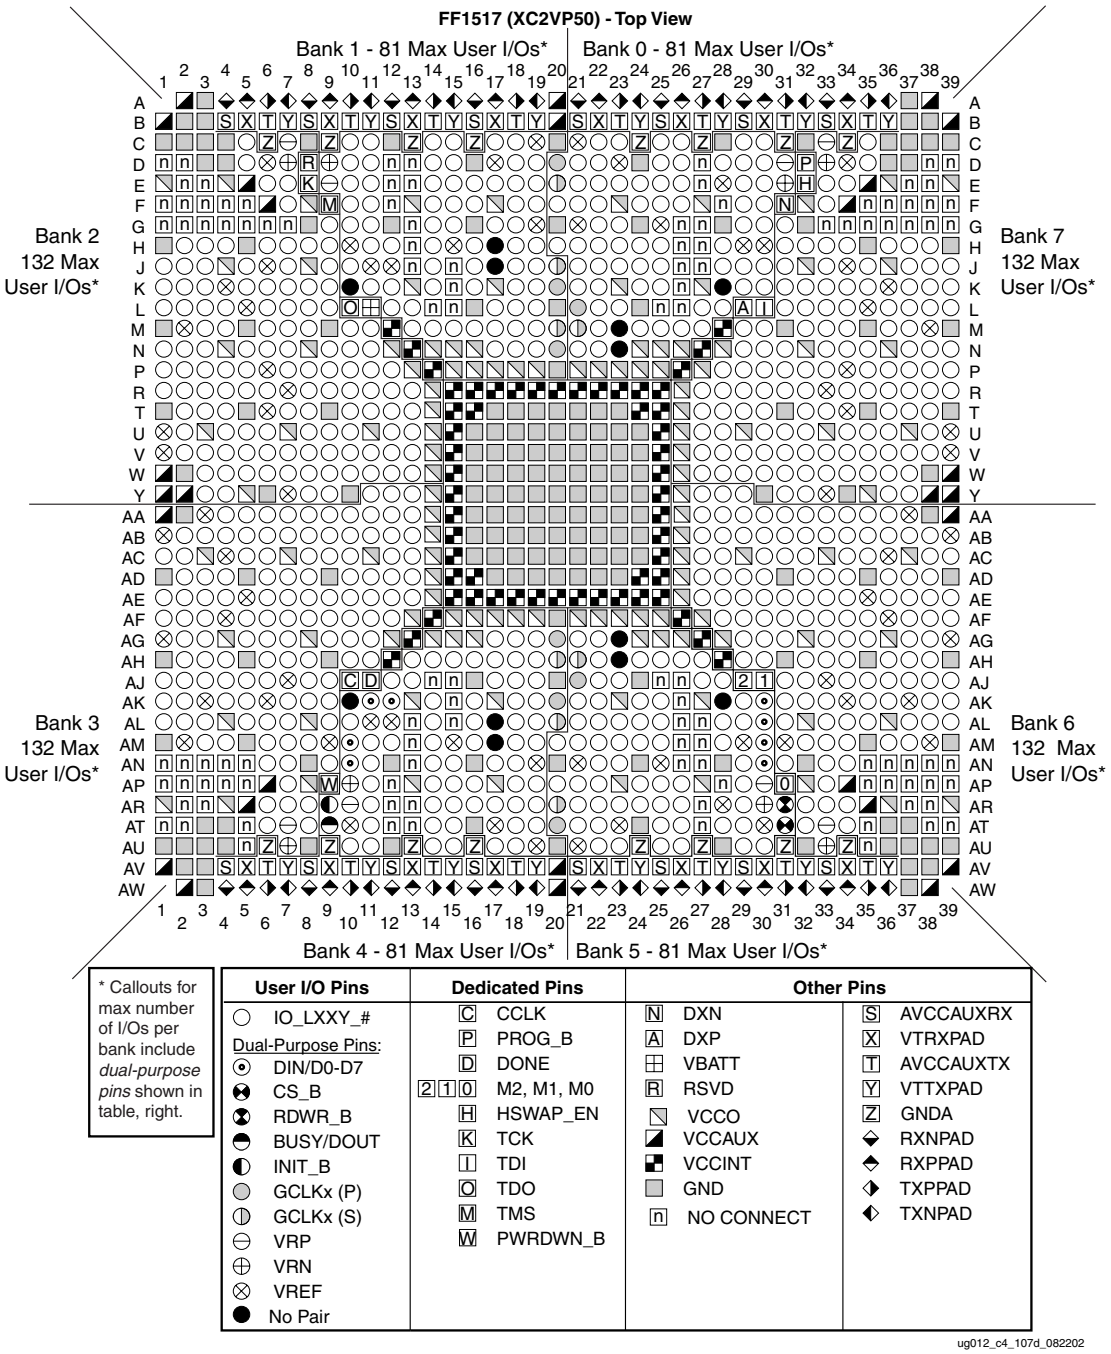


Figure 5-47: **FF1517 Composite Pinout Diagram (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 413/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 413 of 947

FF1517 Banked Pins (XC2VP50)

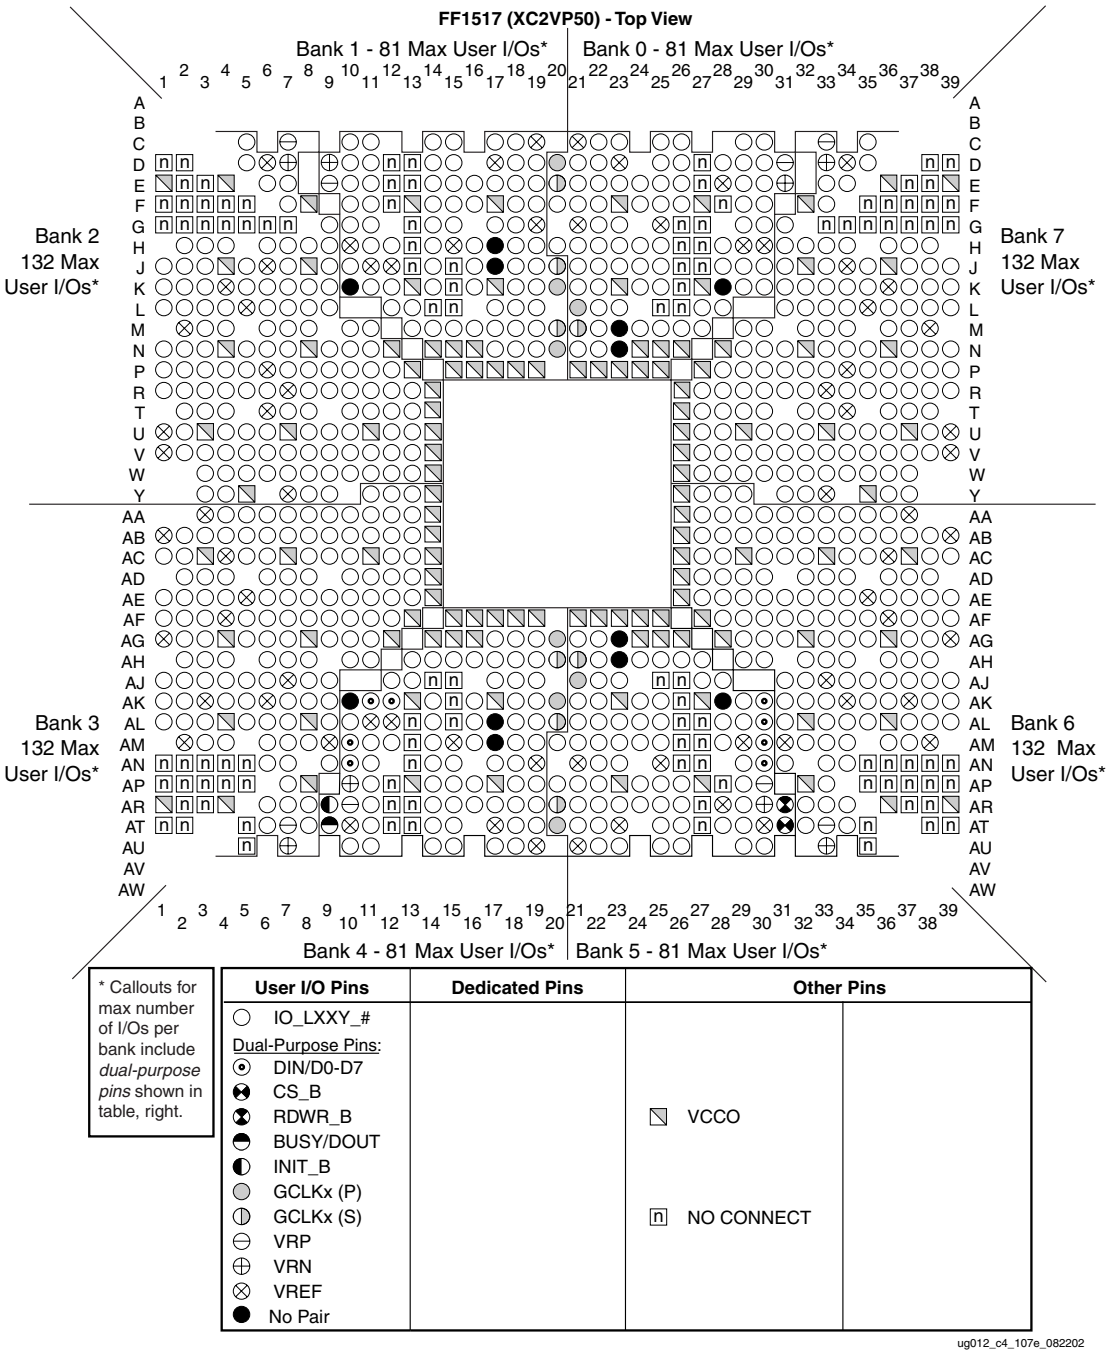


Figure 5-48: **FF1517 Banked Pins (XC2VP50)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 414 of 947

FF1517 Dedicated/Other Pins (XC2VP50, XC2VP70)

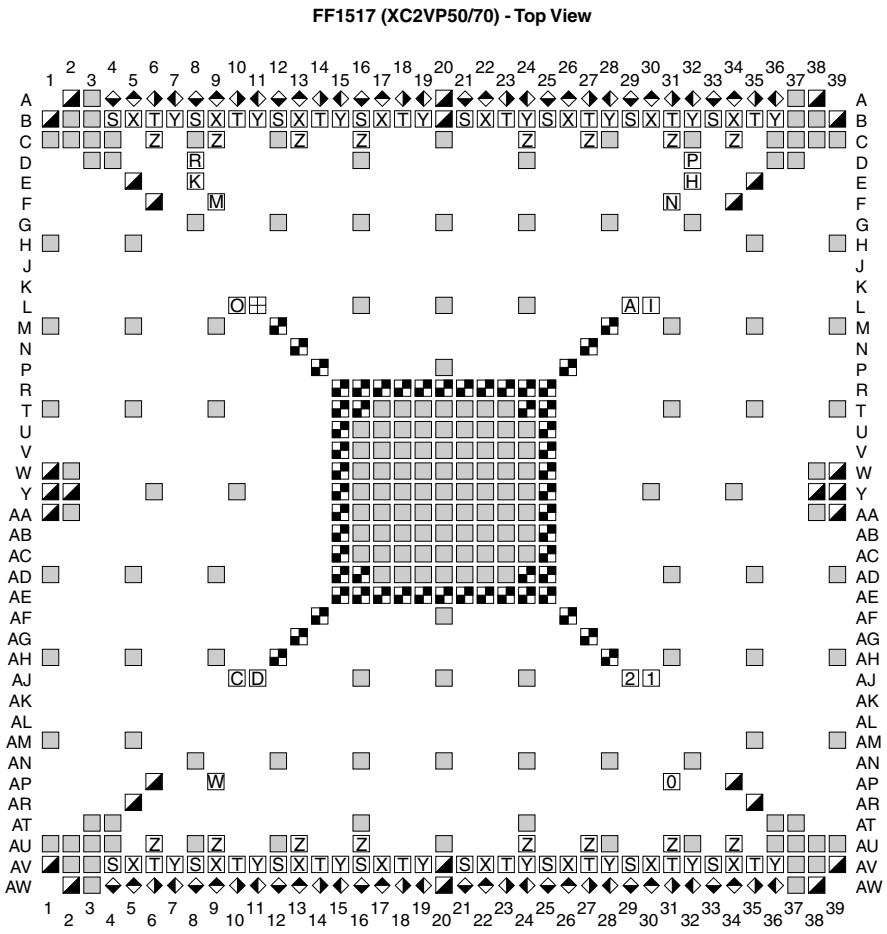


Figure 5-49: **FF1517 Dedicated/Other Pins (XC2VP50, XC2VP70)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 415 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 416 of 947

FF1704 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF1704 Composite Pinout Diagram (XC2VP100, XC2VP125)

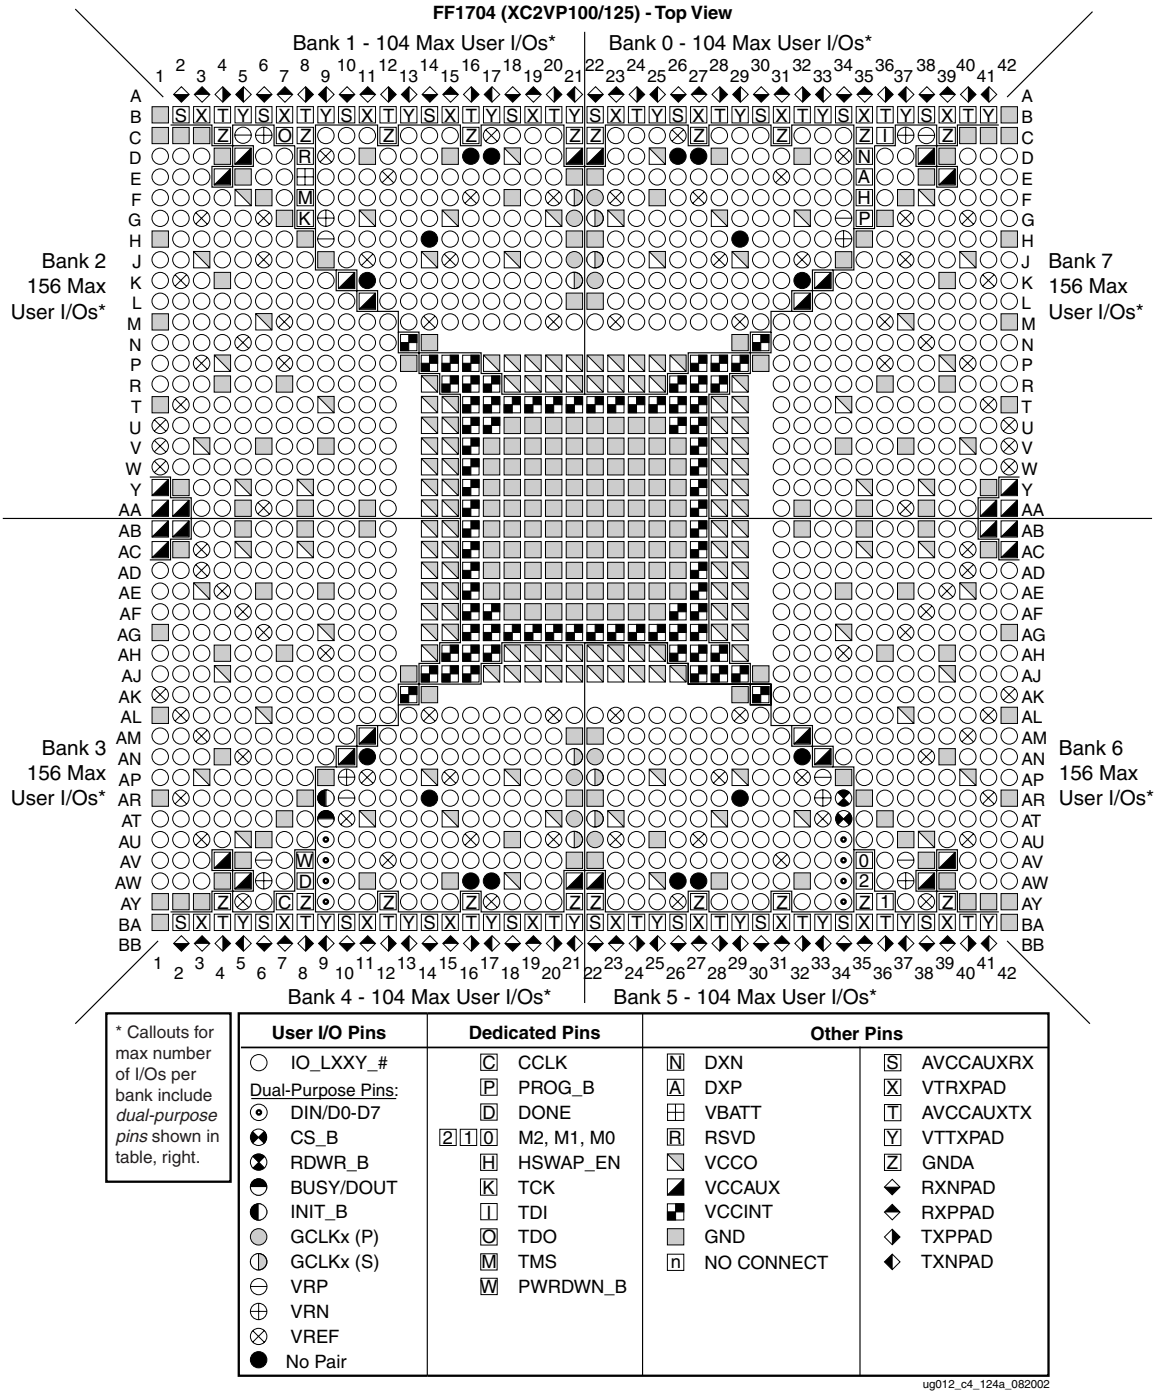


Figure 5-50: **FF1704 Composite Pinout Diagram (XC2VP100, XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 417 of 947

FF1704 Banked Pins (XC2VP100, XC2VP125)

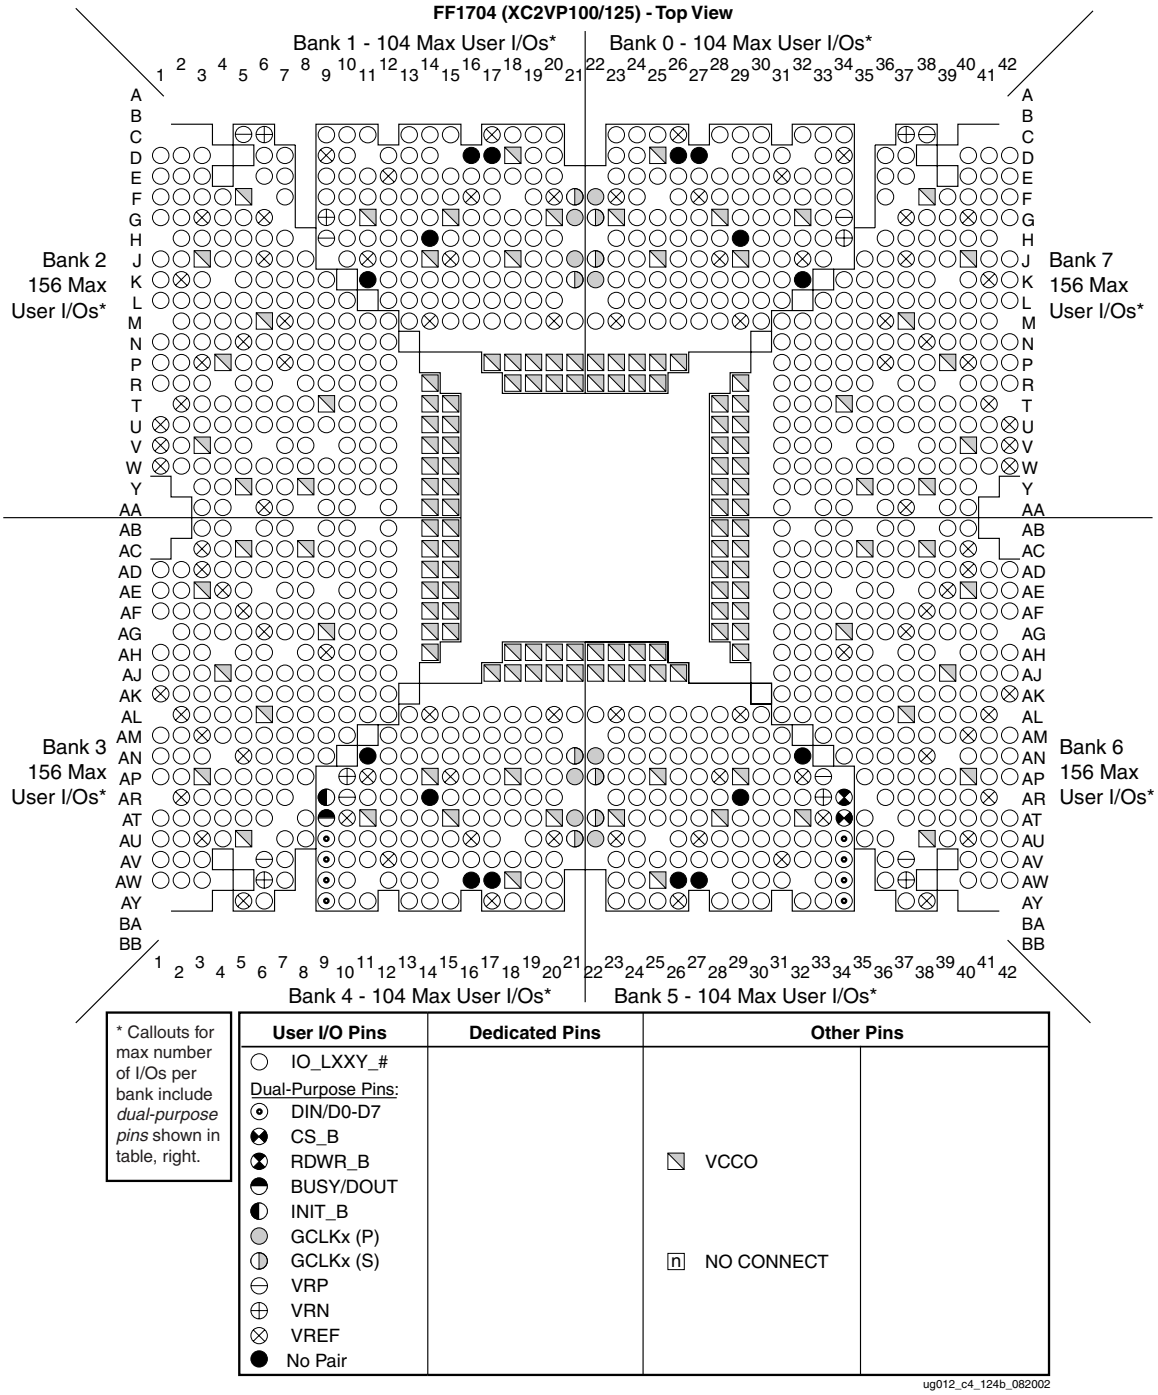


Figure 5-51: **FF1704 Banked Pins (XC2VP100, XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 418 of 947

FF1704 Composite Pinout Diagram (XC2VP70)

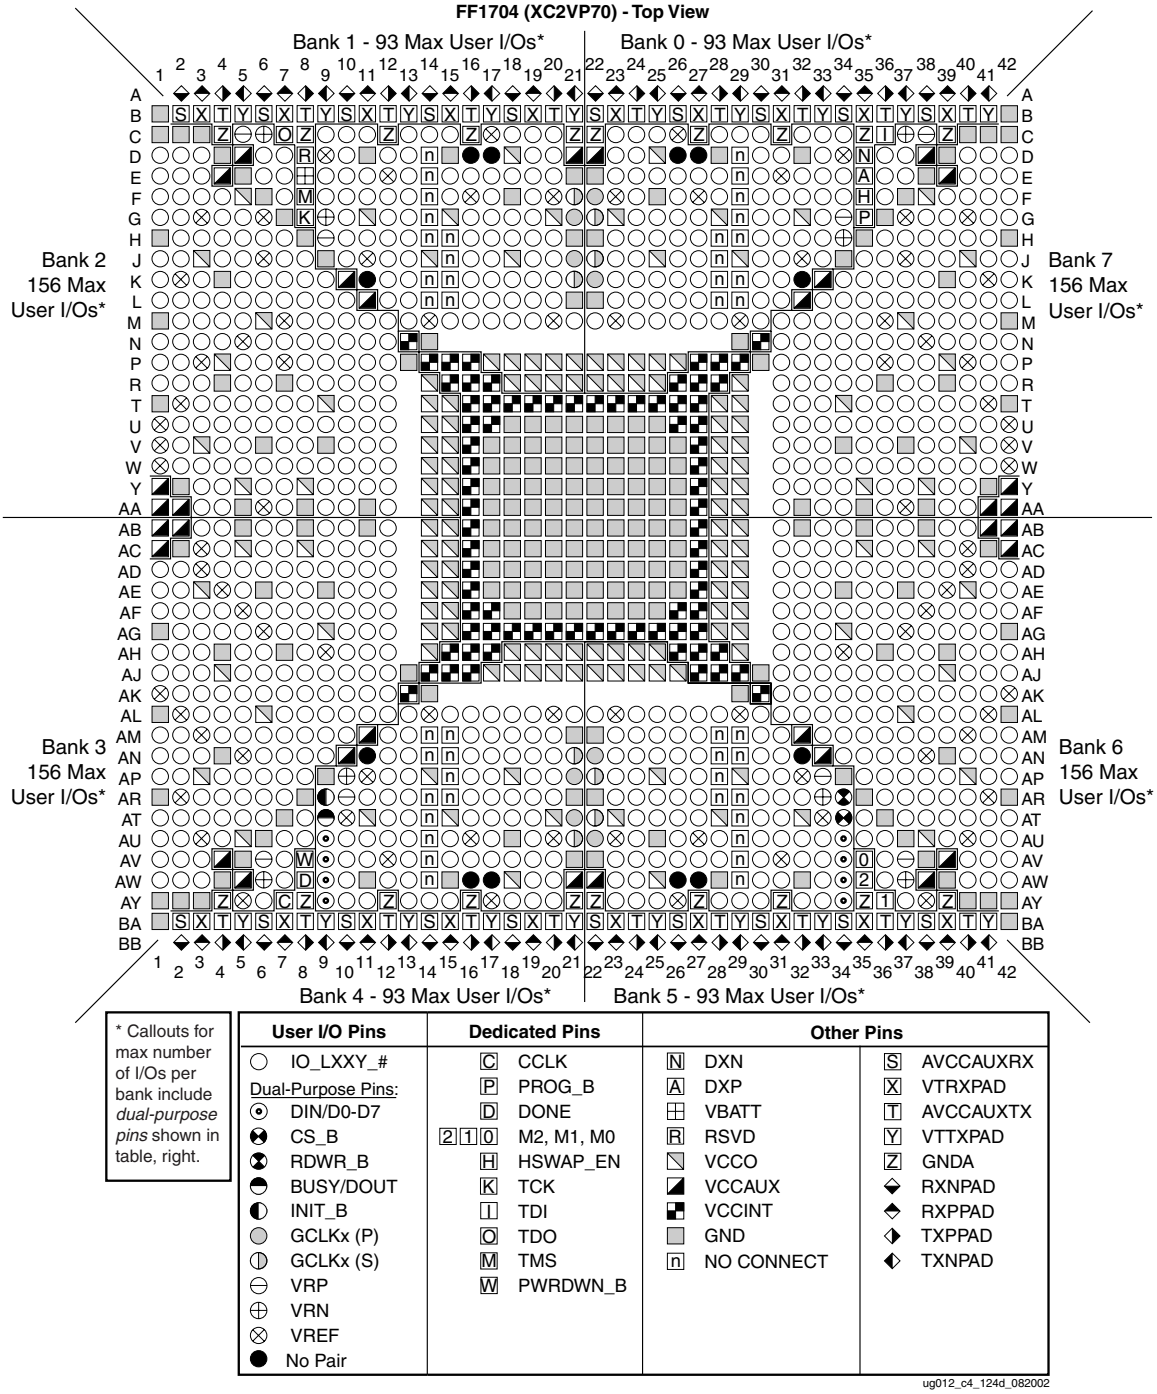


Figure 5-52: **FF1704 Composite Pinout Diagram (XC2VP70)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 419/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 419 of 947

FF1704 Banked Pins (XC2VP70)

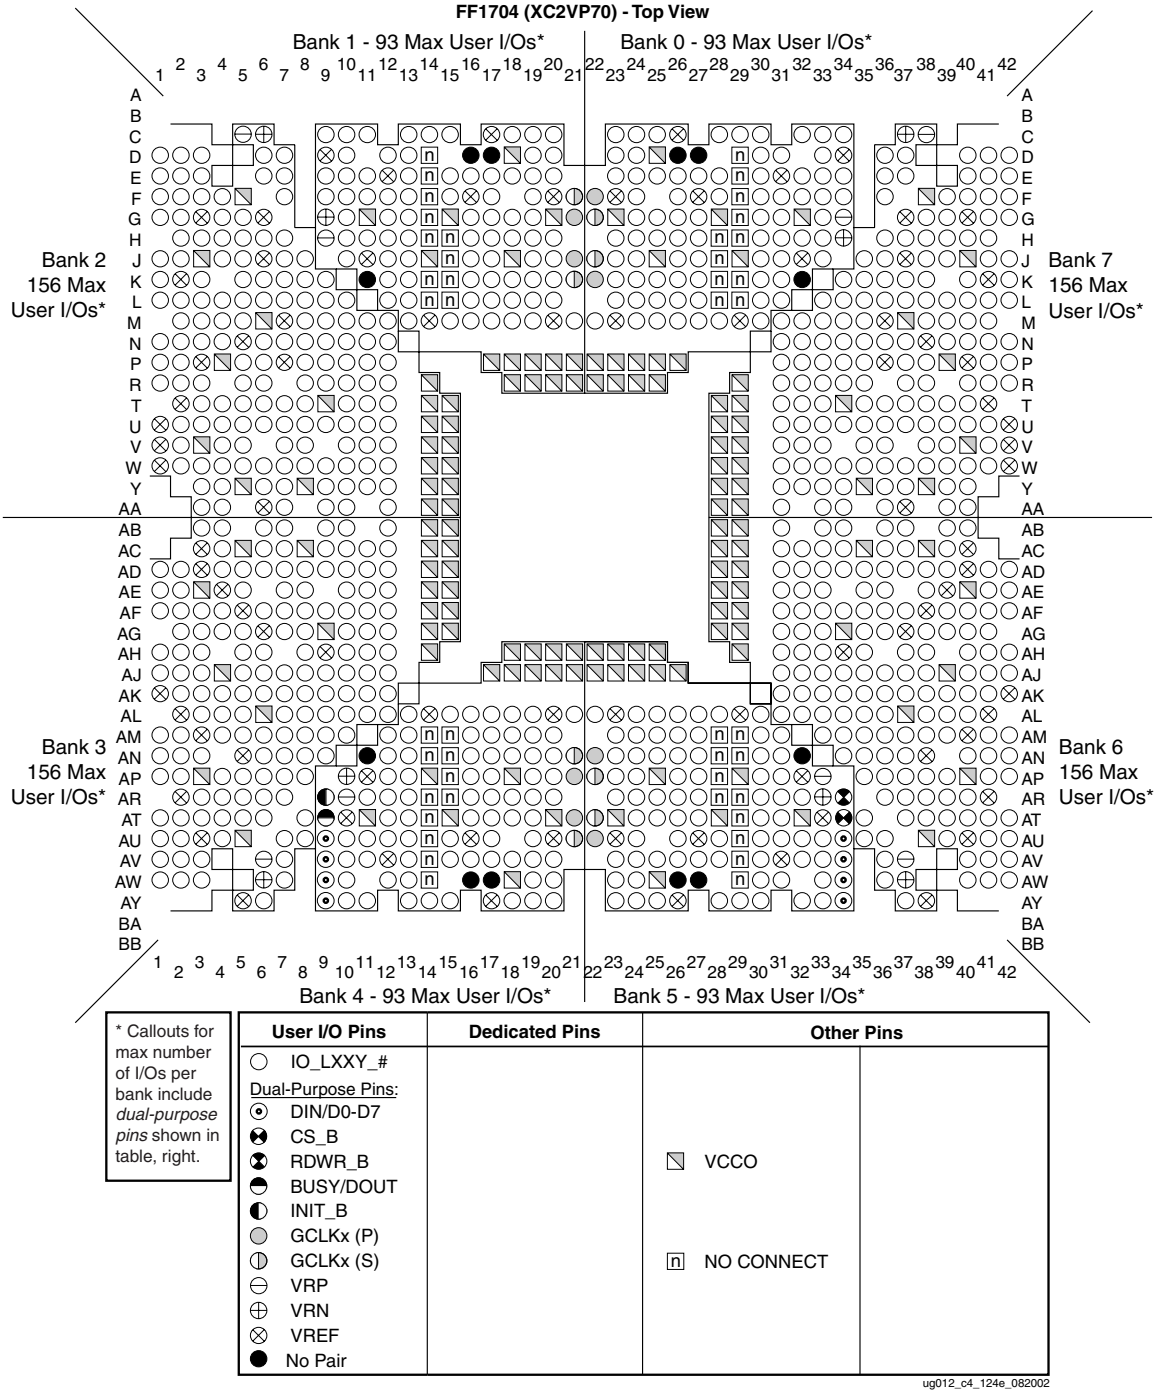


Figure 5-53: **FF1704 Banked Pins (XC2VP70)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 420/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 420 of 947

FF1704 Dedicated/Other Pins (XC2VP70, XC2VP100, XC2VP125)

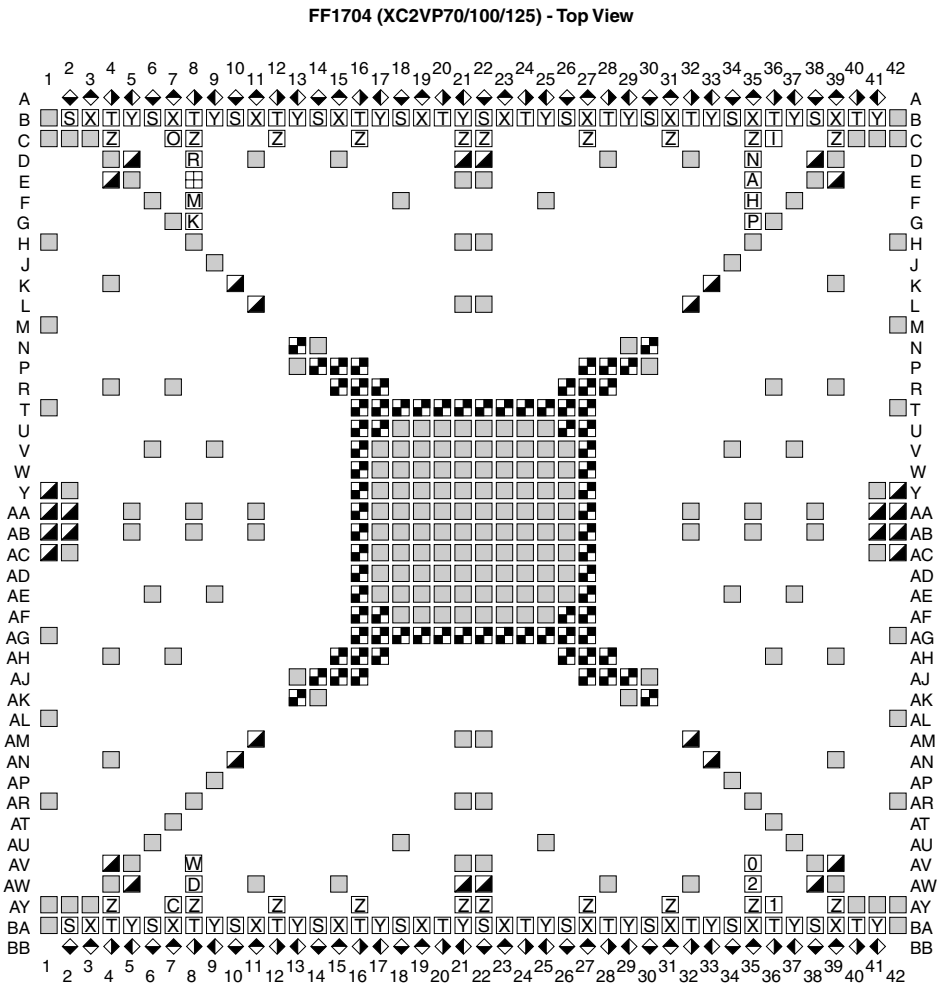


Figure 5-54: **FF1704 Dedicated/Other Pins (XC2VP70, XC2VP100, XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 421 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 422 of 947

FF1696 Flip-Chip Fine-Pitch BGA Pinout Diagrams

FF1696 Composite Pinout Diagram (XC2VP125)

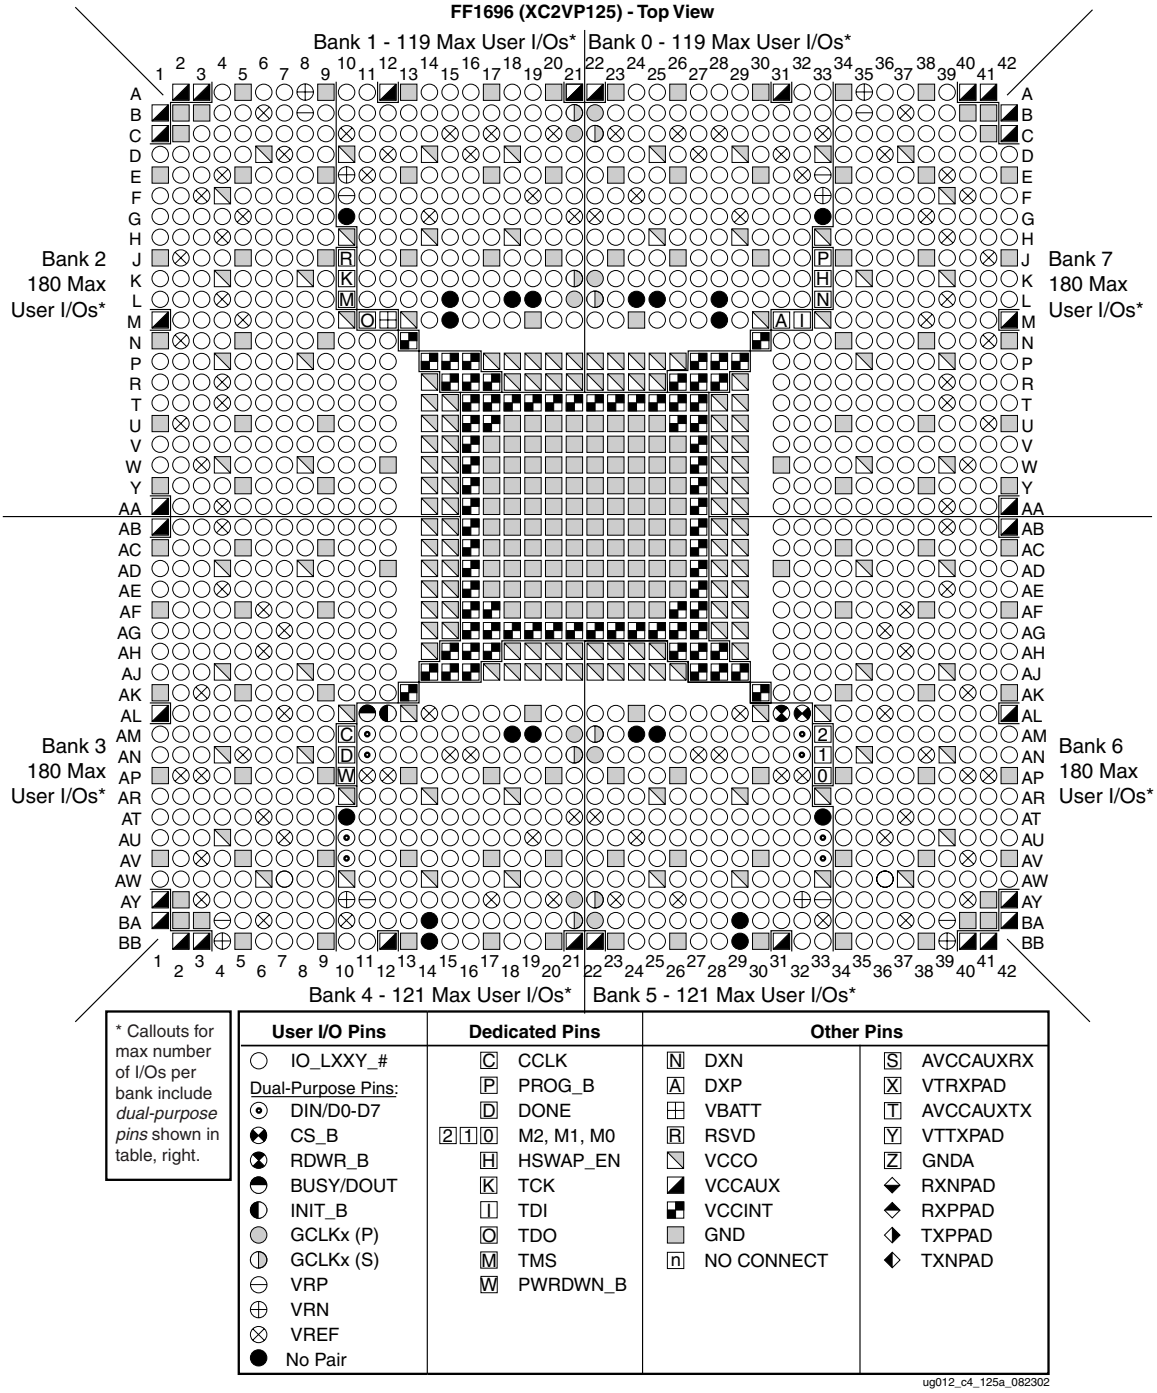


Figure 5-55: **FF1696 Composite Pinout Diagram (XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 423 of 947

FF1696 Banked Pins (XC2VP125)

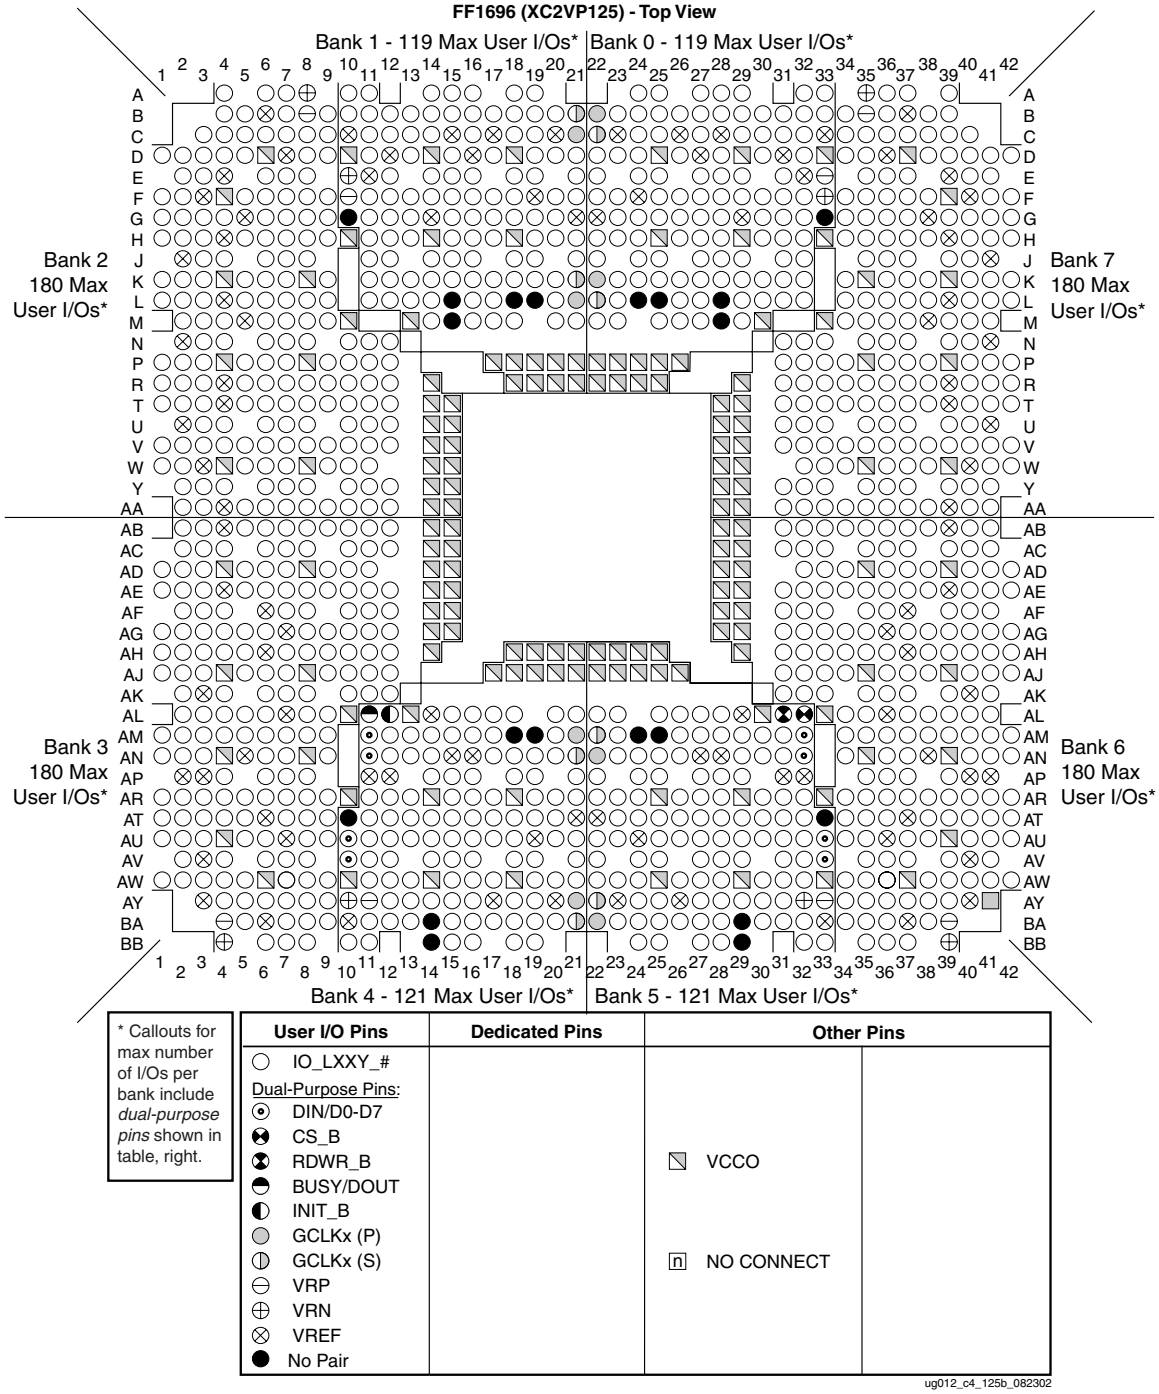


Figure 5-56: **FF1696 Banked Pins (XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 424/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 424 of 947

FF1696 Composite Pinout Diagram (XC2VP100)

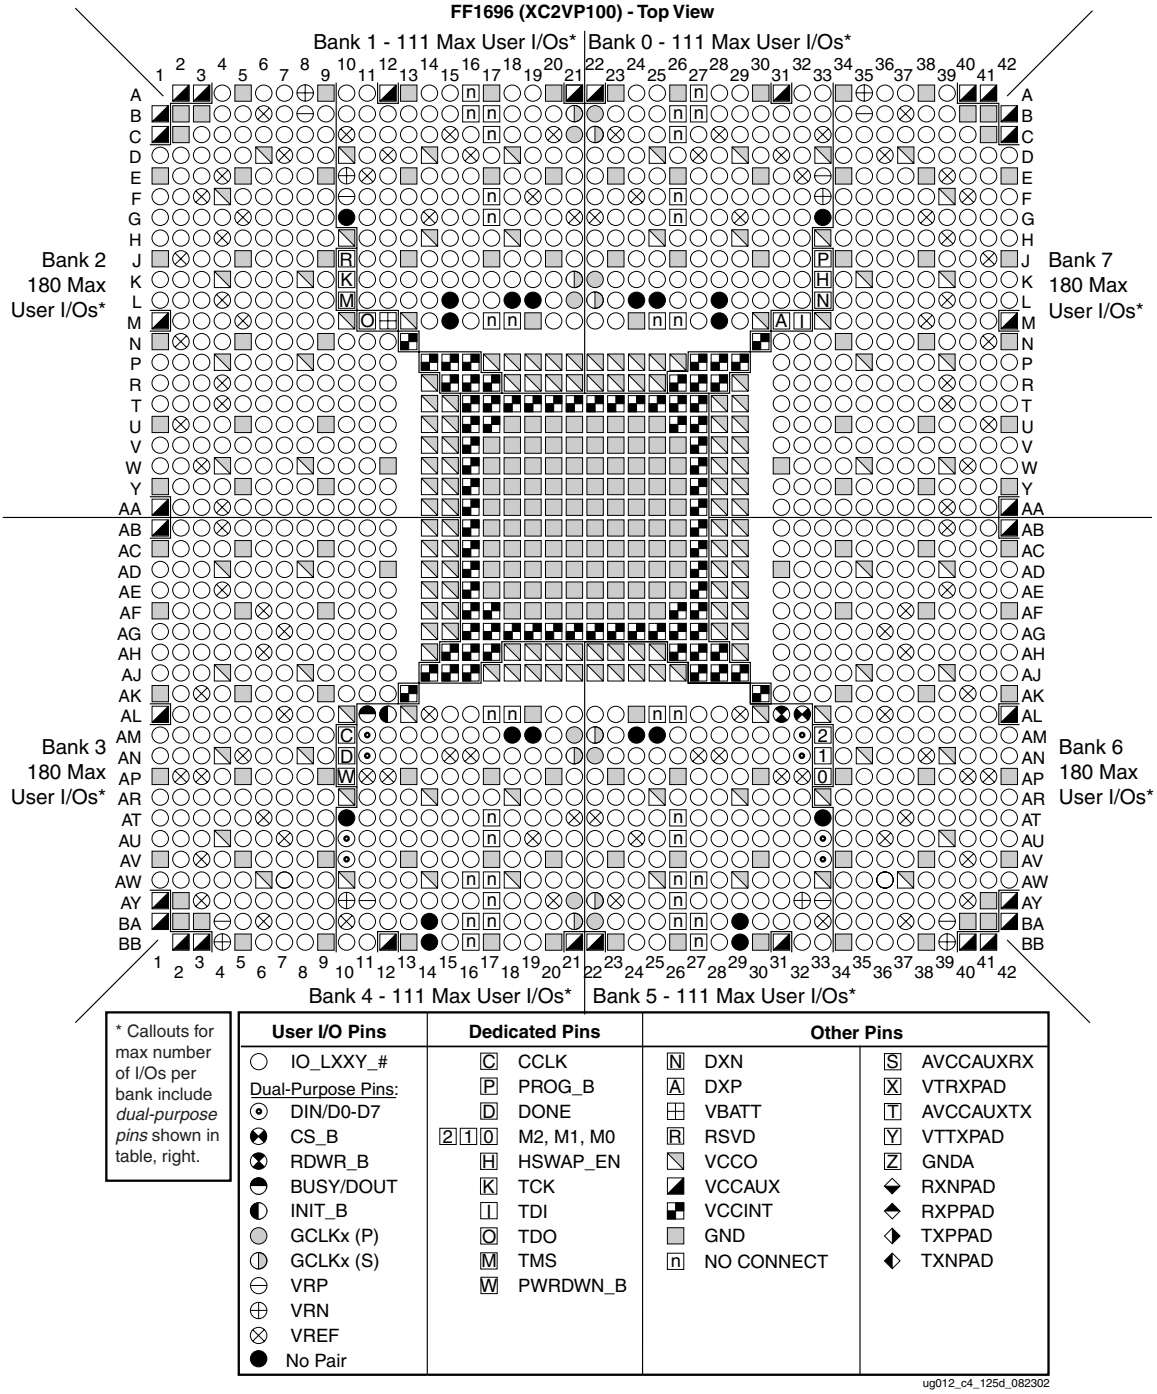


Figure 5-57: **FF1696 Composite Pinout Diagram (XC2VP100)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 425 of 947

FF1696 Banked Pins (XC2VP100)

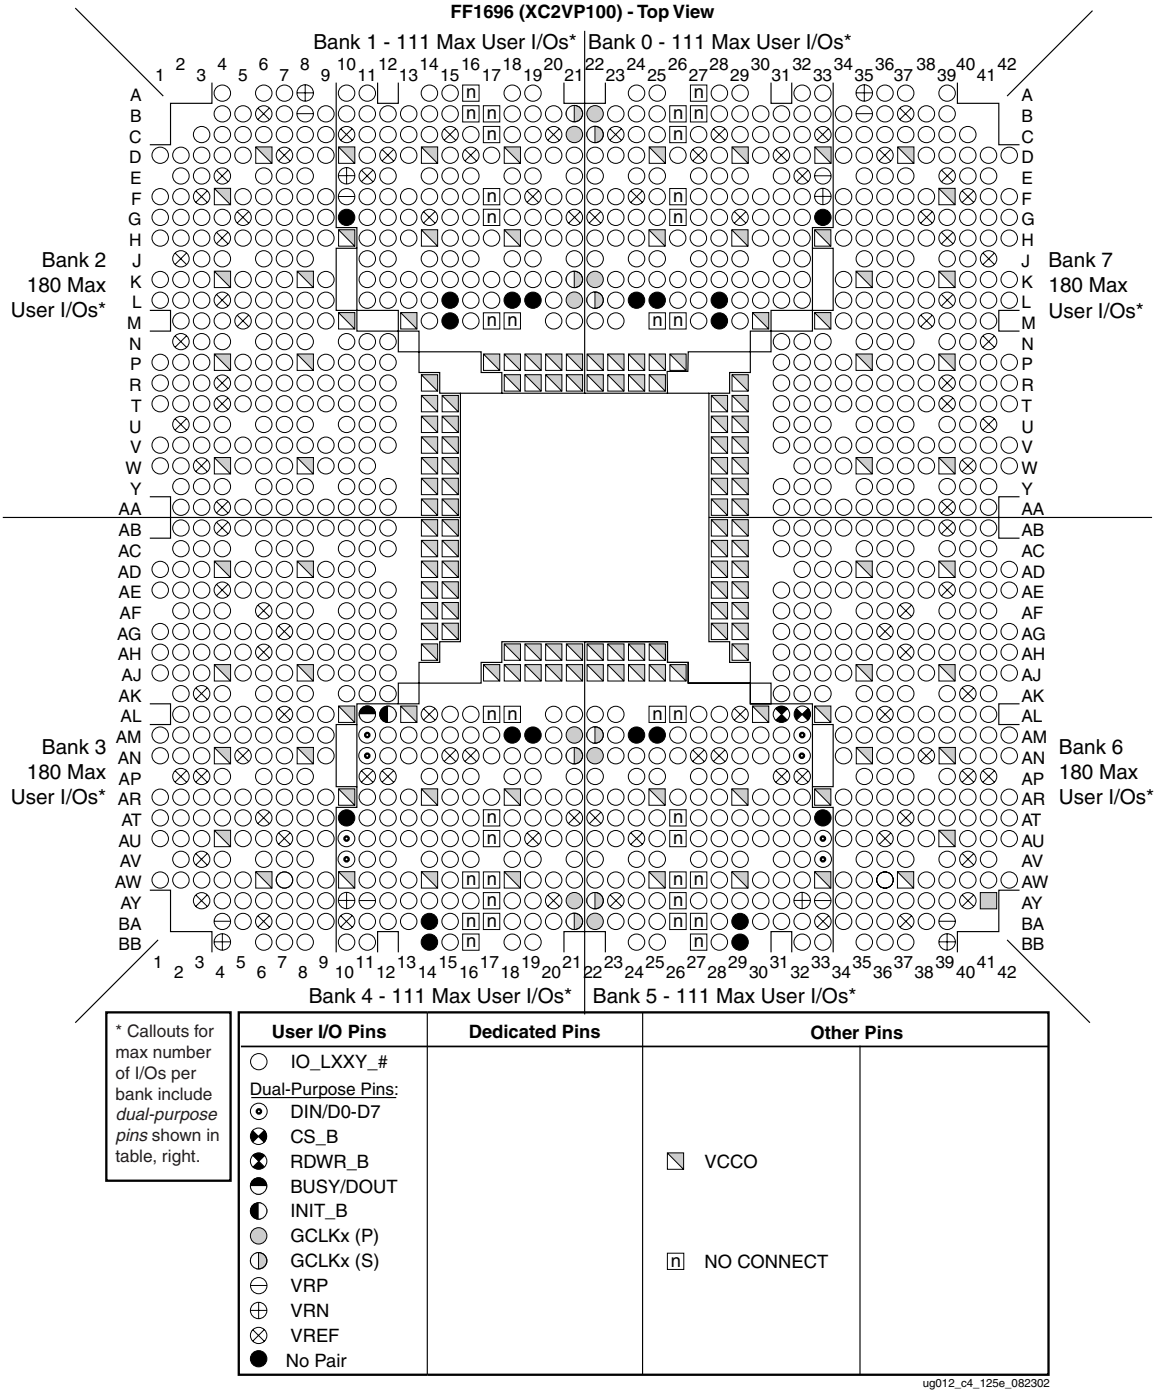


Figure 5-58: **FF1696 Banked Pins (XC2VP100)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 426/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 426 of 947

FF1696 Dedicated/Other Pins (XC2VP100, XC2VP125)

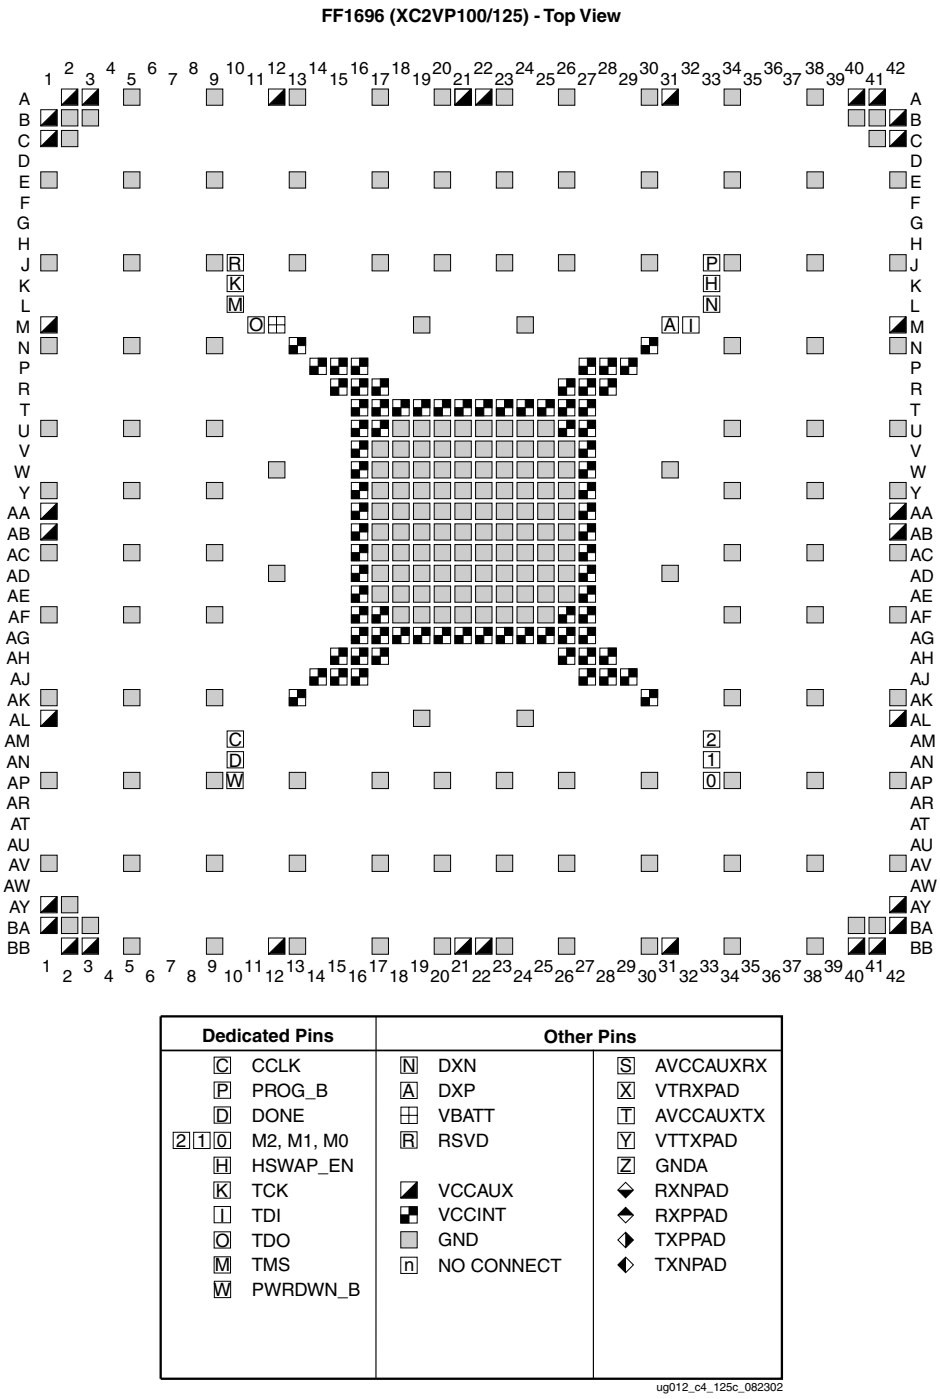


Figure 5-59: **FF1696 Dedicated/Other Pins (XC2VP100, XC2VP125)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 427/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 427 of 947

This page intentionally left blank.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 428 of 947

Package Specifications


This section contains specifications for the following Virtex-II Pro packages:

- "FG256 Fine-Pitch BGA Package (1.00 mm Pitch)," page 426
- "FG456 Fine-Pitch BGA Package (1.00 mm Pitch)," page 427
- "FG676 Fine-Pitch BGA Package Specifications (1.00mm pitch)," page 428
- "FF672 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 429
- "FF896 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 430
- "FF1152 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 431
- "FF1148 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 432
- "FF1517 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 433
- "FF1704 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 434
- "FF1696 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)," page 435

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 429 of 947

FG256 Fine-Pitch BGA Package (1.00 mm Pitch)

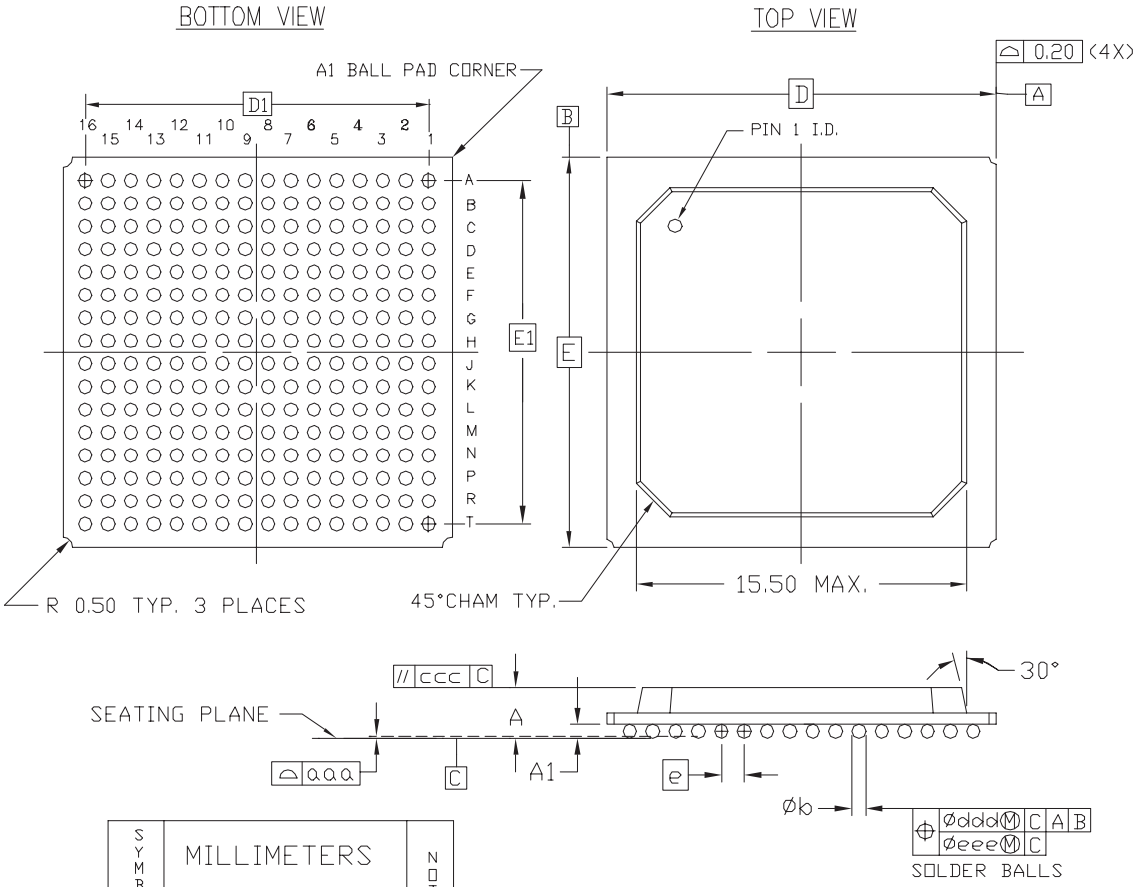

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A			2.00	3
A_1	0.40	0.50	0.60	
D/E	17.00 BSC			
D_1/E_1	15.00 REF			
e	1.00 BSC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	16			2

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994.
2. SYMBOL 'M' IS THE BALL MATRIX SIZE
3. NOMINAL DIMENSION IS TYPICALLY 1.60-1.73mm
4. CONFORMS TO JEDEC MS-034-AAF-1

Figure 5-60: **FG256 Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 430 of 947

FG456 Fine-Pitch BGA Package (1.00 mm Pitch)

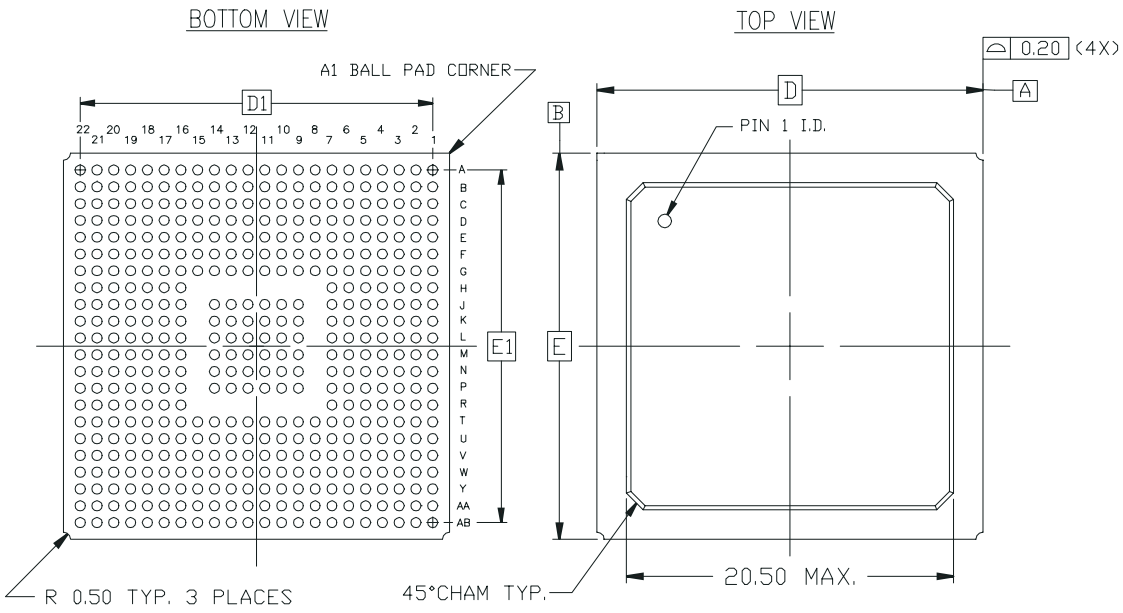

SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A		2.20	2.60
A_1	0.40	0.50	0.60
D/E	23.00 BSC		
D_1/E_1	21.00 REF		
e	1.00 BSC		
øb	0.50	0.60	0.70
aaa			0.20
ccc			0.35
ddd			0.30
eee			0.10
M	22		

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAJ–1 (DEPOPULATED)

Figure 5-61: **FG456 Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 431 of 947

FG676 Fine-Pitch BGA Package Specifications (1.00mm pitch)

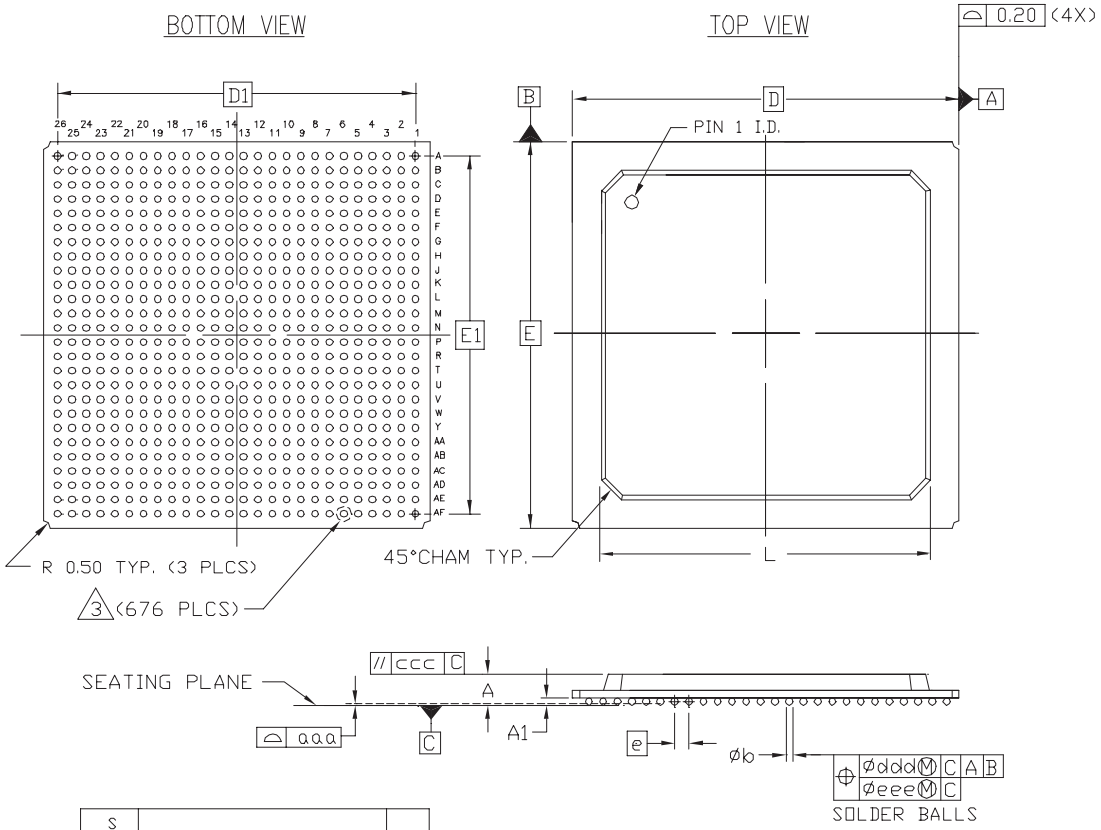

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	2.25	2.60	
A_1	0.40	0.50	0.60	
D/E	27.00 BSC			
D_1/E_1	25.00 REF			
e	1.00 BSC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
ccc	---	---	0.35	
ddd	---	---	0.30	
eee	---	---	0.10	
L	---	---	25.70	
M	26			2
REF.	JEDEC MS-034-AAL-1			

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. LAND PAD OPENING – SOLDER MASK DEFINED ø0.485mm (0.019")

Figure 5-62: **FG676 Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 432 of 947

FF672 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

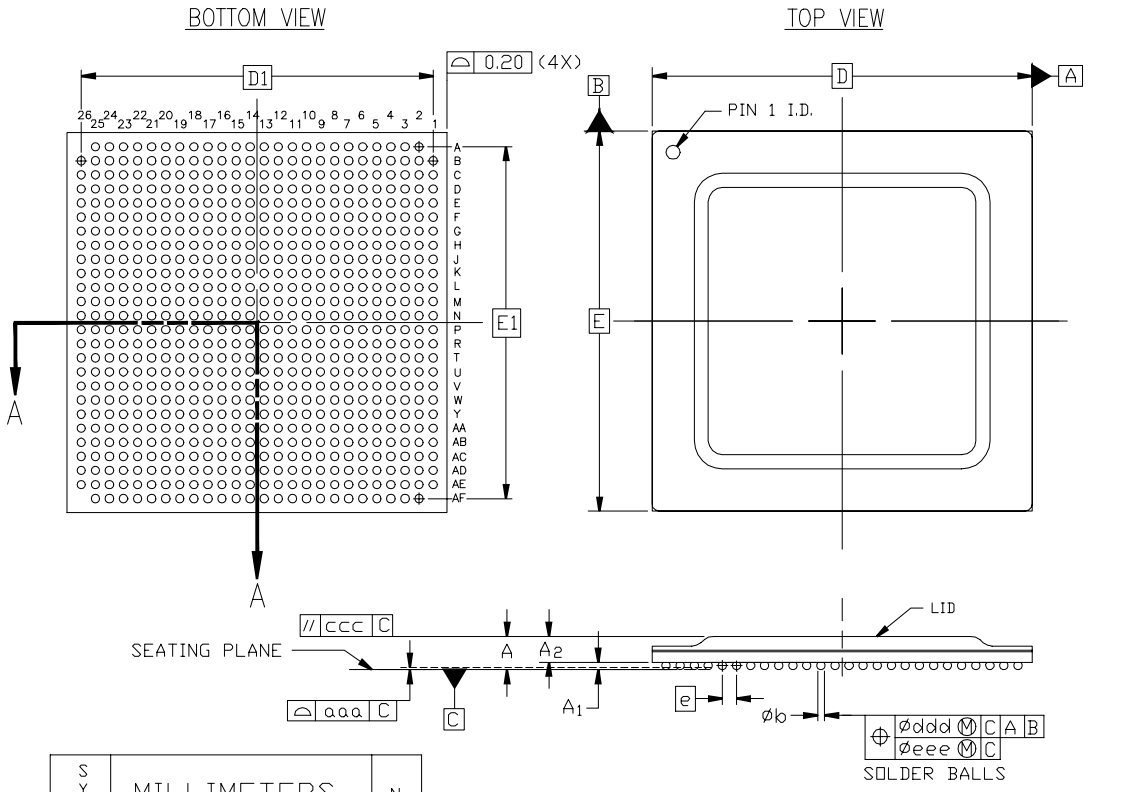

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		2.45	2.65	
A_1	0.40	0.50	0.60	
A_2			2.15	
D/E	27.00 BASIC			
D_1/E_1	25.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	26			2


NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAL–1 (DEPOPULATED)

Figure 5-63: **FF672 Flip-Chip Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 433/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 433 of 947

FF896 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

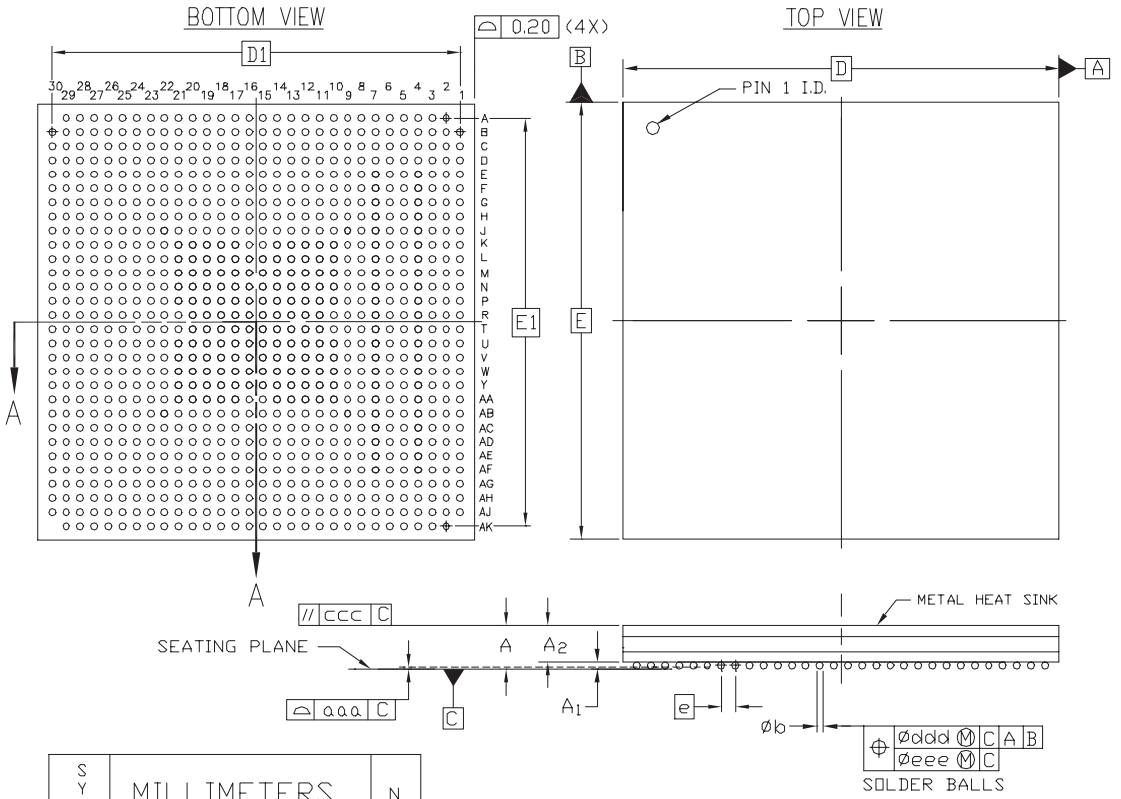

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.40	
A_1	0.40	0.50	0.60	
A_2			2.80	
D/E	31.00 BASIC			
D_1/E_1	29.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	30			2

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAN–1 (DEPOPULATED)

Figure 5-64: **FF896 Flip-Chip Fine-Pitch BGA Package**


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 434 of 947

FF1152 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

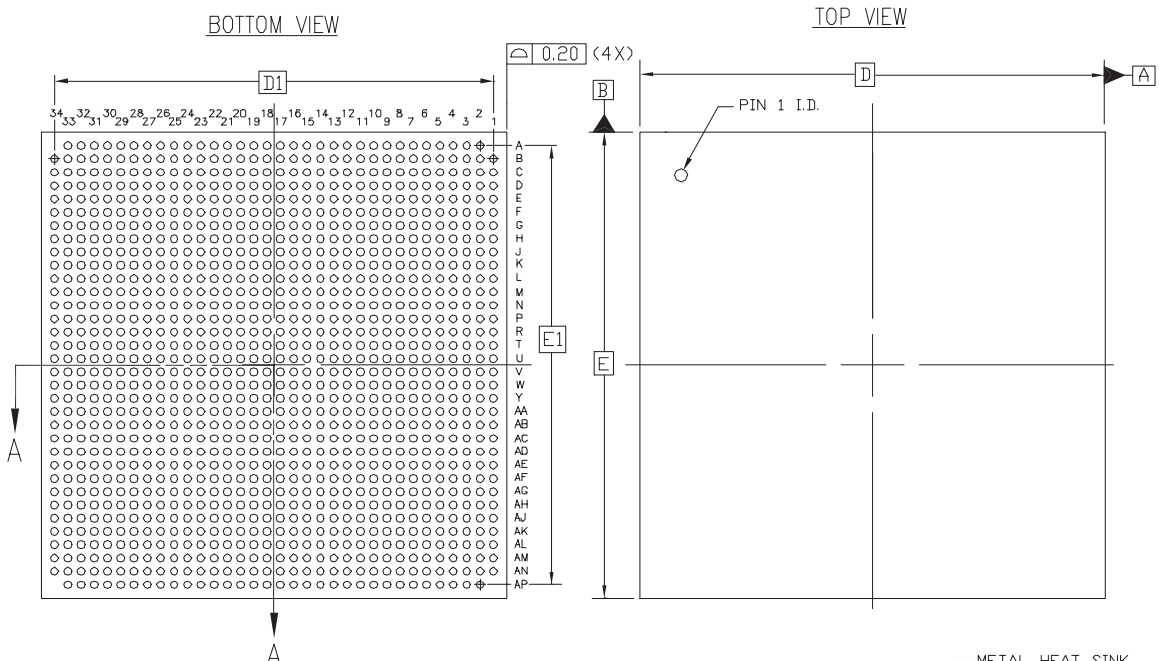

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	3.20	3.40	
A_1	0.40	0.50	0.60	
A_2	---	---	2.80	
D/E	35.00 BASIC			
D_1/E_1	33.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
ccc	---	---	0.35	
ddd	---	---	0.30	
eee	---	---	0.10	
M	34			2

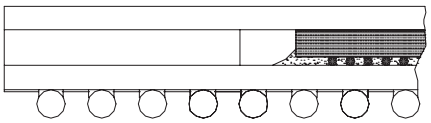


SECTION A–A
(NOT TO SCALE)

NOTES:
1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAR–1 (DEPOPULATED)

Figure 5-65: **FF1152 Flip-Chip Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 435/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 435 of 947

FF1148 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

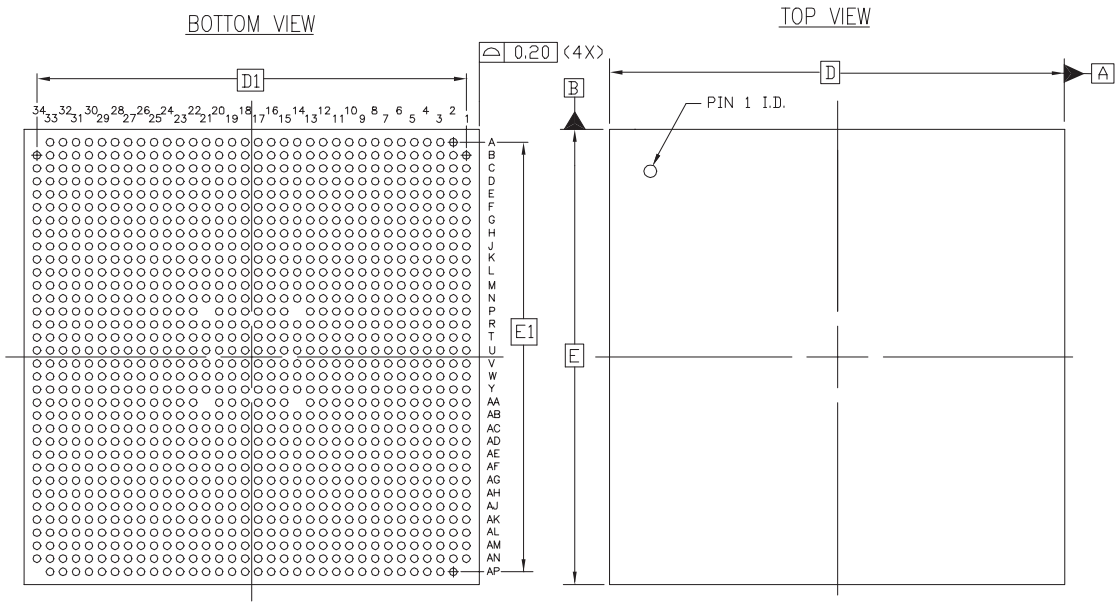

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	3.20	3.40	
A_1	0.40	0.50	0.60	
A_2	---	---	2.80	
D/E	35.00 BASIC			
D_1/E_1	33.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
ccc	---	---	0.35	
ddd	---	---	0.30	
eee	---	---	0.10	
M	34			2

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAR–1 (DEPOPULATED)

Figure 5-66: **FF1148 Flip-Chip Fine-Pitch BGA Package**


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 436 of 947

FF1517 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

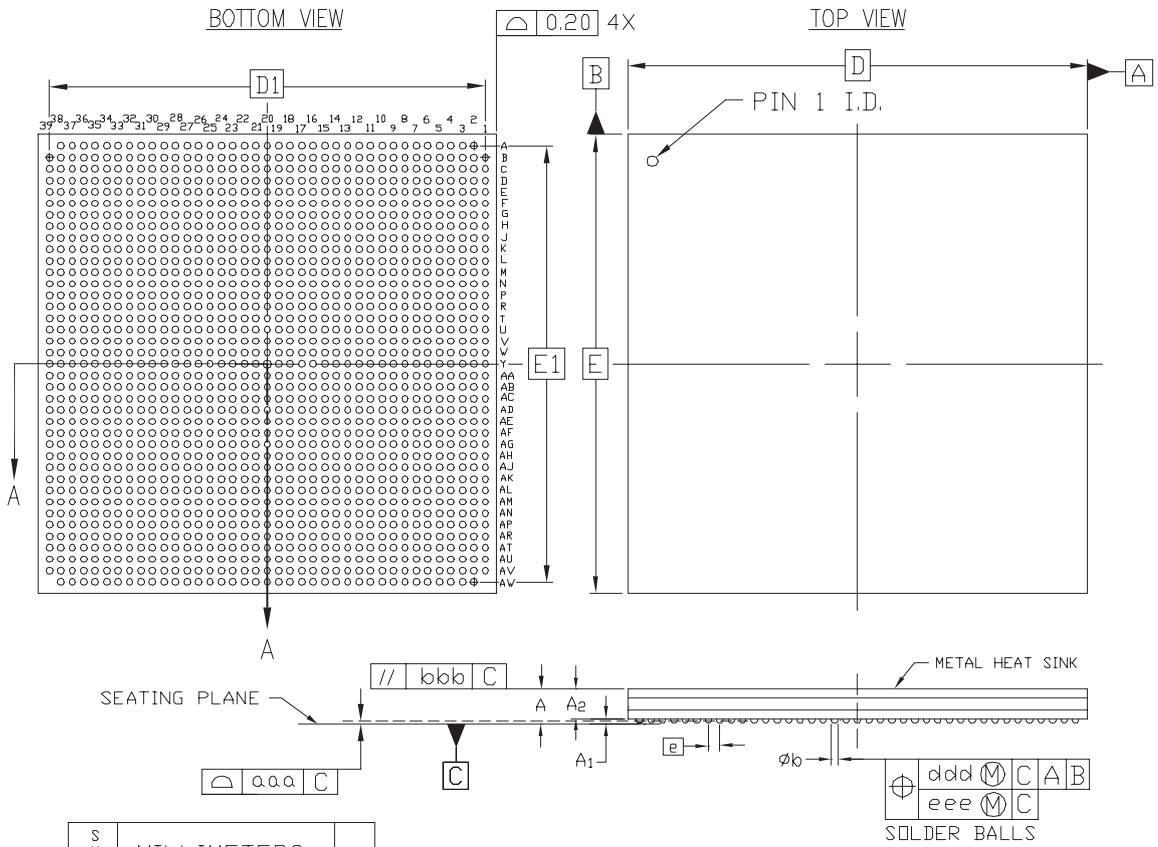

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	3.20	3.40	
A_1	0.40	0.50	0.60	
A_2	---	---	2.80	
D/E	40.00 BASIC			
D_1/E_1	38.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
bbb	---	---	0.25	
ddd	---	---	0.25	
eee	---	---	0.10	
M		39		2



SECTION A–A
(NOT TO SCALE)

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M–1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAU–1 (DEPOPULATED)

Figure 5-67: **FF1517 Flip-Chip Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 437 of 947

FF1704 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

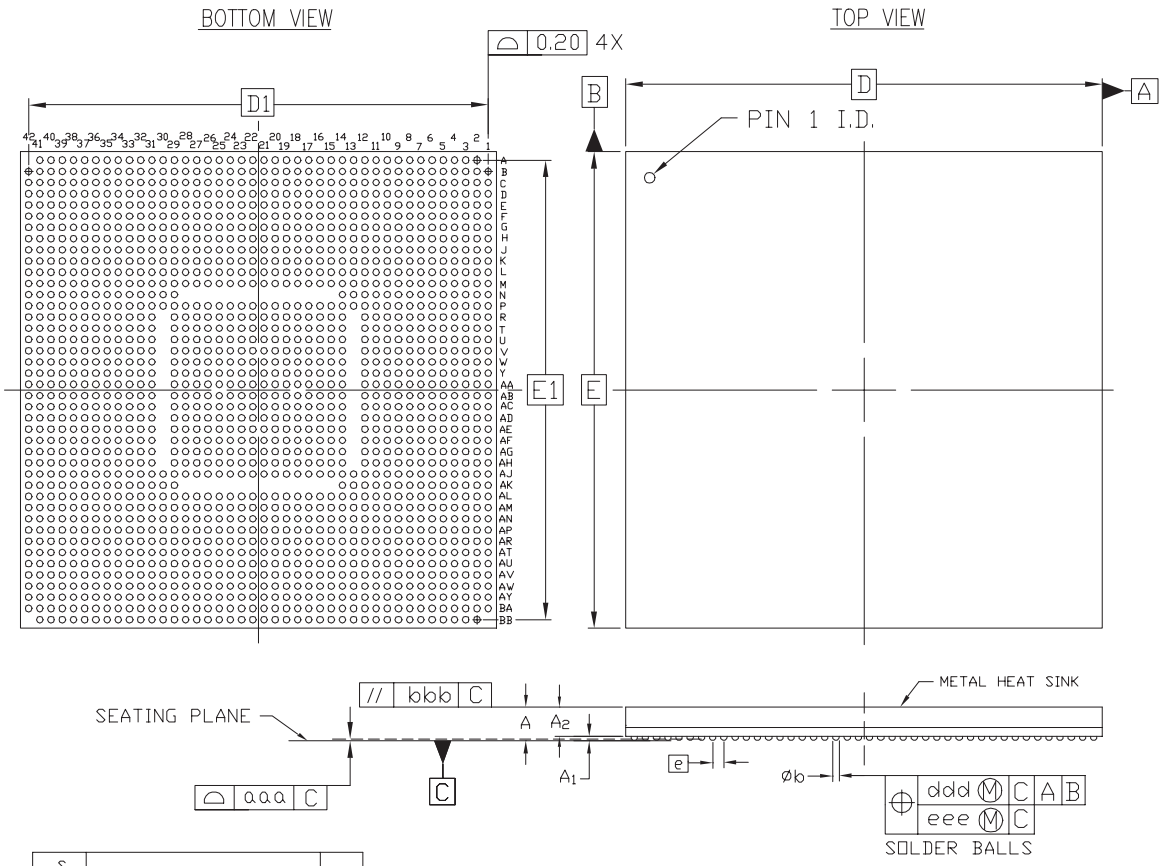

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	3.20	3.45	
A_1	0.40	0.50	0.60	
A_2	---	---	2.85	
D/E	42.50 BASIC			
D_1/E_1	41.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
bbb	---	---	0.25	
ddd	---	---	0.25	
eee	---	---	0.10	
M		42		2

NOTES:


1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M–1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAV–1 (DEPOPULATED)

Figure 5-68: **FF1704 Flip-Chip Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 438 of 947

FF1696 Flip-Chip Fine-Pitch BGA Package (1.00 mm Pitch)

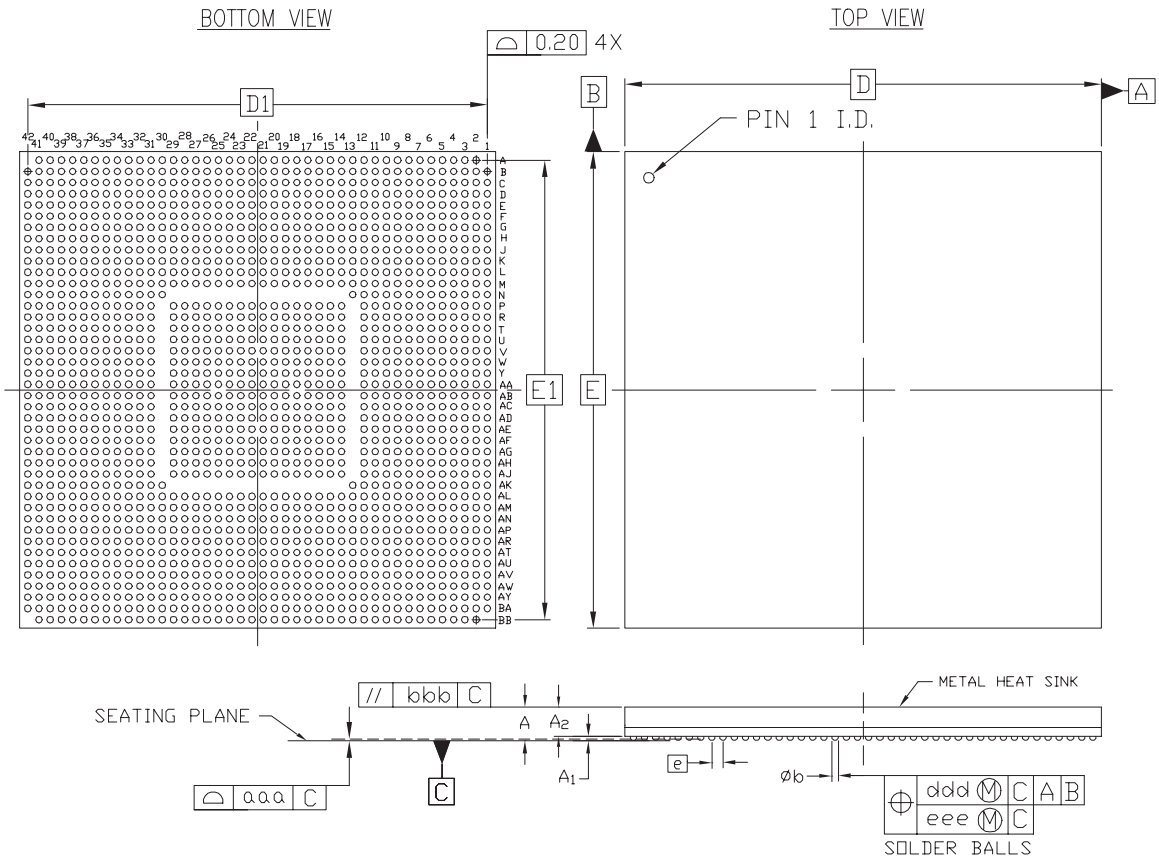

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.45	
A_1	0.40	0.50	0.60	
A_2			2.85	
D/E	42.50 BASIC			
D_1/E_1	41.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
bbb			0.25	
ddd			0.25	
eee			0.10	
M		42		2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M–1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAV–1 (DEPOPULATED)

Figure 5-69: **FF1696 Flip-Chip Fine-Pitch BGA Package**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 439 of 947

Flip-Chip Packages

As silicon devices become more integrated with smaller feature sizes as well as increased functionality and performance, packaging technology is also evolving to take advantage of these silicon advancements. Flip-chip packaging is the latest packaging option introduced by Xilinx to meet the demand for high I/O count and high performance required by today's advanced applications.

Flip-chip packaging interconnect technology replaces peripheral bond pads of traditional wire-bond interconnect technology with area array interconnect at the die/substrate interface.

The area array pads contain wettable metallization for solders (either eutectic or high-lead), where a controlled amount of solder is deposited either by plating or screen-printing. These parts are then reflowed to yield bumped dies with relatively uniform solder bumps spread over the surface of the device. Unlike traditional packaging in which the die is attached to the substrate face up and the connection is made by using wire, the bumped die in a flip-chip package is flipped over and placed face down, with the conductive bumps connecting directly to the matching metal pads on the ceramic or organic laminate substrate. The solder material at molten stage is self-aligning and produces good joints even if the chip is placed offset on the substrate.

Flip-chip packages are assembled on high-density, multi-layer ceramic or organic laminate substrates. Since flip-chip bump pads are in area array configuration, very fine lines and geometry on the substrates are required to be able to successfully route the signals from the die to the periphery of the substrates. Multi-layer build-up structures offer this layout flexibility on flip-chip packages, and they provide improvements in power distribution and signal transmission characteristics.

Advantages of Flip-Chip Technology

Flip-chip interconnections in combination with the advanced multi-layer laminated substrates provide superior performance over traditional wire-bond packaging. Benefits include:

- Easy access to core power/ground and shorter interconnects, resulting in better electrical performance
- Better noise control since the inductance of flip-chip interconnect is lower
- Excellent thermal performance due to direct heatsinking to backside of the die
- Higher I/O density since bond pads are in area array format
- Smaller size

Thermal Data

Thermal Considerations

The Virtex-II Pro device is a feature-rich FPGA product based on the high-performance Virtex-II architecture. The product incorporates numerous features such as multiple RocketIO™ Multi-Gigabit Transceivers (MGTs), one or more embedded IBM PowerPC processors, high-speed SelectI/O™ technology supporting a variety of I/O standards, on-board digitally controlled impedance (DCI) technology, and much more. In fully configured designs that engage all these features at high clock rates, power consumption can add up quickly.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 440 of 947

Unlike the features of ASICs or even of microprocessors, the combination of Virtex-II Pro features that will be utilized in an application are not known ahead of time. Therefore, as in previous FPGA devices, it remains challenging to predict the power requirements and resulting thermal management needs of a Virtex-II Pro device in a given package. These devices, therefore, do not come with a preset thermal solution. The end user's conditions will determine what solutions will be most appropriate. In consideration of the high heat-generating potential of the Virtex-II Pro devices, package offerings are tailored to include medium and high power capable options that allow external thermal management to meet the application's requirements.

Table 5-3 shows thermal resistance parameters for Virtex-II Pro packages. Estimated power consumption capability is given, as well. These values were derived using some typical thermal management assumptions as stated in the table. Table 5-3 provides only an example, and is not intended as a maximum power dissipation specification.

Table 5-3: **Thermal Data for Virtex-II Pro Packages**

Package	Lead Pitch (mm)	Junction-to-Ambient Theta-JA Range, in Air (°C/Watt)	Junction-to-Case Theta-JC Range, Cold Plate (°C/Watt)	Junction-to-Board Psi-JB ("Theta-JB") Typical (°C/Watt)	Max Power, Bare Pkg (Watts) T_A = 50 °C T_{JMAX} = 100 °C	Power With Heatsink (Watts) Theta-SA = 1.5 °C/Watt Theta-CS = 0.1 °C/Watt T_A = 50° C, T_J = 100° C
FG256, 2-4L PCB, 17x17	1.0	24 - 28	3.0 - 5.0	14.0	1.7	N/A(1)
FG456, 4L PCB, 23x23	1.0	18 - 22	2.0 - 2.5	10.0	2.5	N/A(1)
FG676, 4L PCB, 26x26	1.0	16 - 18	2.0 - 2.5	7.6	3.0	N/A(1)
FF672, 27x27 Flip-Chip	1.0	14 -16	1.5	6.5	3.3	16
FF896, 31x31 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21
FF1152, 35x35 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21
FF1148, 35x35 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21
FF1517, 40x40 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21
FF1704, 42.5x42.5 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21
FF1696, 42.5x42.5 Flip-Chip	1.0	10 - 12	1.1	3.7	4.5	21

θ_{JA} (Theta-JA): Thermal resistance, junction-to-ambient (Xilinx-supplied)
θ_{JC} (Theta-JC): Thermal resistance, junction-to-case (use with ratio of heat through the top)
Ψ_{JB} (Psi-JB, or "Theta-JB"): Thermal resistance in still air, junction-to-board
θ_{SA} (Theta-SA): Thermal resistance, heatsink (manufacturer-supplied)
θ_{CS} (Theta-CS): Thermal resistance, heatsink adhesive (manufacturer-supplied)

Notes:
1. The heat sink used in this example is not mechanically compatible with the FG256, FG456, and FG676 packages.

Virtex-II Pro packages can be grouped into three broad performance categories: low, medium, and high, based on their power handling capabilities. All of the packages can use external thermal enhancements, which can range from simple airflow to schemes that can include passive as well as active heatsinks. This is particularly true for high-performance flip-chip packages where system designers have the option to further enhance the packages to handle in excess of 20 watts, with arrangements that take system physical constraints into consideration. Table 5-4 shows simple but incremental power management schemes that can be brought to bear on flip-chip packages.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 441 of 947

Table 5-4: **Virtex-II Pro Flip-Chip Thermal Management**

Power	Technique	Description
Low End (1 - 6 watts)	Bare package with moderate air 8 - 12 °C/Watt	Bare package. Package can be used with moderate airflow within a system.
Mid Range (4 - 10 watts)	Passive heatsink with air 5 - 10 °C/Watt	Package is used with various forms of passive heatsinks and heat spreader techniques.
High End (8 - 25 watts)	Active heatsink 2 - 3 °C/Watt or better	Package is used with active heatsinks, TEC, and board-level heat spreader techniques

Thermal Management Options

The following are thermal management options to consider:

- For moderate power dissipation (2 to 6 watts), the use of passive heatsinks and heatspreaders attached with thermally conductive double-sided tapes or retainers can offer quick thermal solutions.
- The use of lightweight finned external passive heatsinks can be effective for dissipating up to 10 watts. The more efficient external heatsinks tend to be tall and heavy. To help protect component joints from bulky heatsink-induced stresses, the use of spring loaded pins or clips that transfer the mounting stress to a circuit board is advisable. The diagonals of some of these heatsinks can be designed with extensions to allow direct connections to the board.
- Flip-chip packages: All flip-chip packages are thermally enhanced BGAs with die facing down. They are offered with exposed metal heatsink at the top. These high-end thermal packages lend themselves to the application of external heatsinks (passive or active) for further heat removal efficiency. Again, precaution should be taken to prevent component damage when a bulky heatsink is attached.
- Active heatsinks can include a simple heatsink incorporating a mini fan or even a Peltier Thermoelectric Cooler (TECs) with a fan to blow away any heat generated. Any considerations to apply TEC in heat management should require consultation with experts in using the device, since these devices can be reversed and cause damage to the components. Also, condensation can be an issue.
- Outside the package itself, the board on which the package sits can have a significant impact on thermal performance. Board designs can be implemented to take advantage of a board's ability to spread heat. The effect of the board is dependent on its size and how it conducts heat. Board size, the level of copper traces on it, and the number of buried copper planes all lower the junction-to-ambient thermal resistance for packages mounted on the board.

  The junction-to-board thermal resistance for Virtex-II Pro packages are given in Table 5-3. A standard JEDEC type board was used for obtaining the data. Users need to be aware that a direct heat path to the board from a component also exposes the component to the effect of other heat sources - particularly if the board is not cooled effectively. An otherwise cooler component might be heated by other heat contributing components on the board.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 442 of 947

Printed Circuit Board Considerations

Layout Considerations

The PC board is no longer just a means to hold ICs in place. At today's high clock rates and fast signal transitions, the PC board performs a vital function in feeding stable supply voltages to the IC and in maintaining signal integrity between devices.

V_{CC} and Ground Planes

Since CMOS power consumption is dynamic, it is a non-trivial task to assure stable supply voltages at the device pins and to minimize ground differentials. A multi-layer PC board is a must, with four layers for the simplest circuits, 6 to 12 layers for typical boards. Ground and V_{CC} must each be distributed in complete layers with few holes. Slots in these layers would cause an unacceptable inductive voltage drop, when the supply current changes at a rate of 1 A/ns, or even faster. Besides an uninterrupted ground plane, Virtex-II Pro devices require one plane for V_{CCINT} (1.5V) plus one plane for V_{CCAUX} (2.5V). V_{CCO} can be distributed on wide sections of split plane layers. Note that signal traces on adjacent layers should not be routed across these plane splits.

Beyond low resistance and inductance, ground and V_{CC} planes combined can also provide a small degree of V_{CC} decoupling. The capacitance between two planes is ~180 pF/inch^2 or ~28 pF/cm^2, assuming 5mil (0.125 mm) spacing with FR4 epoxy.

V_{CC} Decoupling

Fast changing I_{CC} transitions must be supplied by local decoupling capacitors, placed very closely to the V_{CC} device pins or balls. These capacitors must have sufficient capacitance to supply I_{CC} for a few nanoseconds, and must have low intrinsic resistance and inductance. X7R or NPO ceramic surface-mounted capacitors of 0.01 to 0.1 µF, one per V_{CC} device pin, are appropriate. 0.1 µF can supply 1A for 2 ns with a 20 mV voltage droop.

1A • 2 ns = 2 nanocoulomb = 100 nF • 0.02V

Low impedance at >100 MHz is important. Some capacitance variation with temperature is acceptable. A series of values of decoupling capacitors are needed in order to supply transient current to the device over all frequency ranges. The highest frequency capacitors should be in the range of 300 pF to 1 nF. The smallest capacitors are the first-line source for I_{CC}, and they must be placed very close to the V_{CC} pins. An inch of copper plane represents an inductance of several nanohenries, defeating the purpose of the decoupling capacitor. Therefore, the highest frequency (smallest value) capacitors should be mounted within 0.4 inches (1 cm) of the V_{CC} and ground pin pair that it is decoupling. On large full-array BGA packages like the FF1152 and FF1517, following the decoupling guidelines presents implementation challenges. Note that the power and ground balls on these packages are grouped in banks. A subset of the initial line of high-frequency decoupling capacitors should be mounted directly opposite the component on the reverse side of the board and within the apparent boundary of the component. At least one and typically two 0.1 µF chipcaps per bank should be used. The balance of the high-frequency bypass requirements can be implemented outside the periphery on these full-array packages. Backing up this local decoupling is one tantalum capacitor of 10 µF to 100 µF, able to supply multiple amperes for about 100 ns.

Finally, each board needs a power-supply decoupling electrolytic capacitor of 1000 µF to 10,000 µF, able to supply even more current for a portion of the supply switching period. As described below, larger capacitors inevitably have higher series resistance and

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 443 of 947

inductance, which is the reason for the above-mentioned hierarchy of supply decoupling. As a general rule, multiple capacitors in parallel always offer lower resistance and inductance than any single capacitor.

Bypass capacitors must have vias (at least two per pad) abutting the pads, or vias in the pads, to provide the lowest inductance connection.

Decoupling Capacitors

The ideal decoupling capacitor would present a short circuit to ground for all AC signals. A real capacitor combines a given amount of capacitance with unavoidable parasitics, a small series resistance, and inductance. At low frequencies, the composite impedance is capacitive: that is, it decreases with increasing frequency. At high frequencies, it is inductive and increases with frequency, making the decoupling ineffective. In between, there is the LC resonant frequency, where the capacitor looks like a small resistor. This is the range where it is most effective.

Different technologies provide different trade-offs between desirable features like small size and high capacitance, and undesirable features like series resistance and inductance. Electrolytic and tantalum capacitors offer the largest capacitance in a given physical size, but also have the highest inductance. This makes them useful for decoupling low frequencies and storing large amounts of charge, but useless for high frequency decoupling. Surface-mount ceramic capacitors, on the other hand, offer the lowest inductance and the best high-frequency performance, but offer only a small amount of capacitance, usually less than a microfarad.

Figure 5-70 shows the frequency-dependent impedance and resistance of a typical electrolytic capacitor of 1500 µF, while Figure 5-71 and Figure 5-72 show the equivalent data for ceramic bypass capacitors of 33,000 pF and 3,300 pF, respectively. Note that the resonant frequency for the small ceramic bypass capacitor at 100 MHz is 10,000 times higher than the resonance frequency of the large electrolytic capacitor at 10 KHz. For more technical information on decoupling capacitors, see the manufacturers' websites.

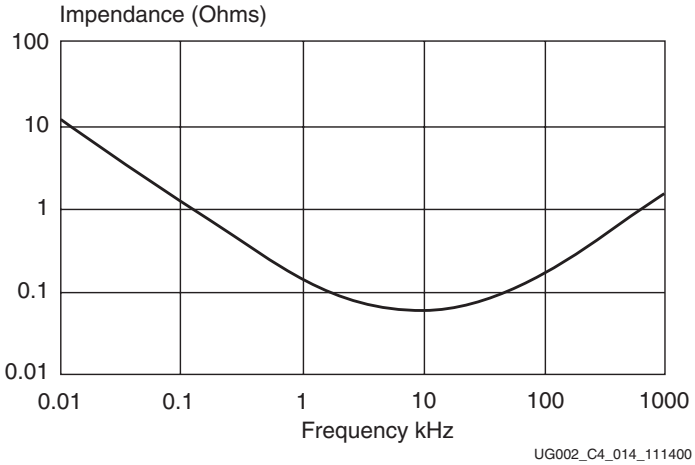


Figure 5-70: **1500 µF Electrolytic Capacitor Frequency Response Curve**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 444 of 947

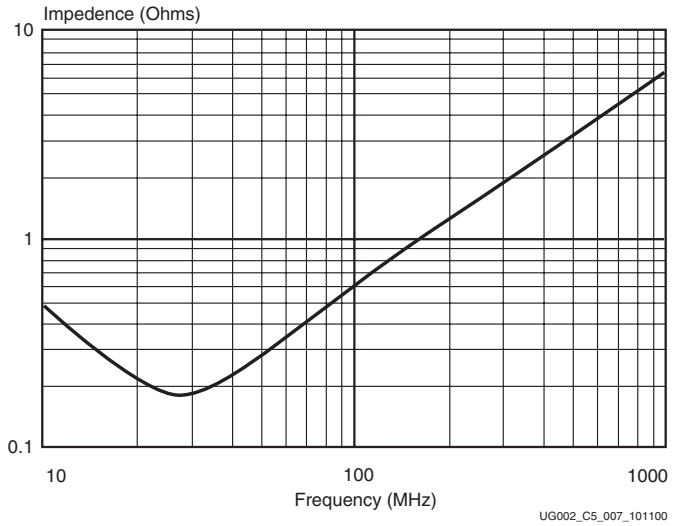


Figure 5-71: **33000 pF X7R Component Frequency Response Curve**

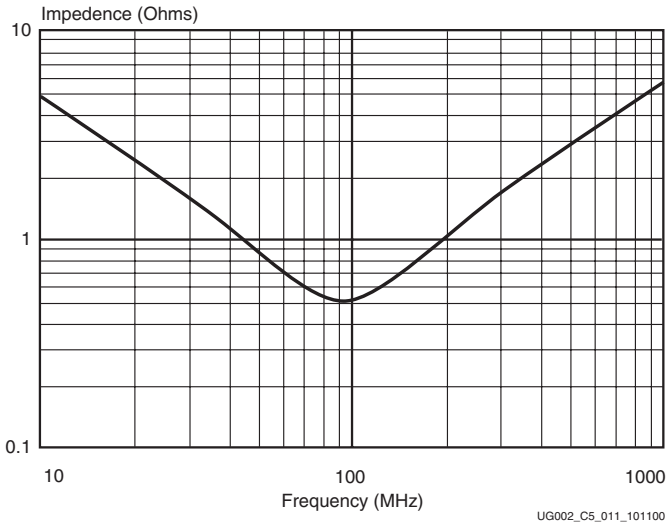


Figure 5-72: **3300 pF X7R Component Frequency Response Curve**

Transmission Line Reflections and Terminations

A PC board trace must be analyzed as a transmission line. Its series resistance and parallel conductance can generally be ignored, but series inductance and parallel capacitance per unit length are important parameters. Any signal transition (rising or falling edge) travels along the trace at a speed determined by the incremental inductance and capacitance.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 445 of 947

For an outer-layer trace (air on one side), the propagation delay is 140 ps/inch, or 55 ps/cm. For an inner-layer trace (FR4 with ε=4.5 on both sides), the propagation delay is 180 ps/inch, or 70 ps/cm.

The voltage-to-current ratio at any point along the transmission line is called the characteristic impedance Z_0. A field solver, which is available in most signal integrity simulation software, may be used to determine the impedance of a given trace geometry. As a first order approximation, it is determined by w/d, the ratio of trace width w to the distance d above the ground or V_{CC} plane.

For an outer layer trace (microstrip),

Z_0 = 50Ω when w = 2d (e.g., w = 12 mil, d = 6 mil),

Z_0 = 75Ω when w = d (e.g., both 6 mil = 0.15 mm).

For an inner layer trace between two ground or V_{CC} planes (stripline),

Z_0 = 50Ω when w = 0.6 • d (e.g., w = 5 mil, d = 8 mil),

Z_0 = 75Ω when w = 0.25 • d (impractical).

Most signal traces fall into the range of 40Ω to 80Ω.

A slow transition treats a short narrow trace as a lumped capacitance of about 2 pF/inch (0.8 pF/cm). However, if the trace is so long or the signal transition so fast that the potential echo from the far end arrives after the end of the transition, then the trace must be analyzed as a transmission line.

In this case, the driver sees the trace not as a lumped capacitance, but rather as a pure resistance of Z_0. The signal transition then travels along the trace at the speed mentioned above. At any trace-impedance discontinuity all or part of the signal is reflected back to the origin. If the far end is resistively terminated with $R=Z_0$, then there is no reflection. If, however, the end is open, or loaded with only a CMOS input, then the transition doubles in amplitude, and this new wave travels back to the driver, where it may be reflected again, resulting in ringing. Such ringing has a serious impact on signal integrity, reduces noise margins, and can lead to malfunction, especially if an asynchronous signal or a clock signal crosses the input threshold voltage unpredictably. Two alternate ways to avoid reflections and ensure signal integrity are parallel termination and series termination.

Parallel Termination

Reflections from the far end of the transmission line are avoided if the far end is loaded with a resistor equal to Z_0. A popular variation uses two resistors, one to V_{CC}, one to ground, as the Thevenin equivalent of Z_0. This reduces the load current for one signal level, while increasing it for the other. Parallel termination inherently has some dc power consumption. DCI on-chip termination may be used to realize parallel termination schemes.

See Figure 5-73.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 446 of 947

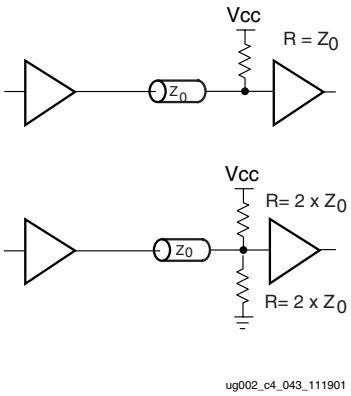


Figure 5-73: **Parallel Termination**

Series Termination

While parallel termination eliminates reflections, series termination relies on the reflection from the far end to achieve a full-amplitude signal. For series termination, the driver impedance is adjusted to equal Z_0, thus driving a half-amplitude signal onto the transmission line. At the unterminated far end, the reflection creates a full-amplitude signal, which then travels back to the driver where it is absorbed, since the output impedance equals Z_0. See Figure 5-74.




Figure 5-74: **Series Termination**

Series termination dissipates no dc power, but the half-amplitude round-trip delay signal means that there must be no additional loads along the line. Series termination is ideal (and only meaningful) for single-source-single-destination interconnects. DCI on-chip termination may be used to realize series termination schemes through the use of controlled impedance drivers.

DCI On-Chip Termination

Virtex-II Pro devices offer digitally controlled output impedance drivers and digitally-controlled input termination, thus eliminating the need for any external termination resistors. This feature is extremely valuable with high pin-count, high density packages.

These PC board considerations apply to all modern systems with fast current and voltage transitions, irrespective of the actual clock frequency. The designer of relatively slow systems is more likely caught off-guard by the inherent speed of modern CMOS ICs, where di/dt is measured in A/ns, dV/dt is measured in V/ns, and input flip-flops can react to 1 ns pulses, that are invisible on mid-range oscilloscopes. Powerful tools like HyperLynx and other signal integrity analysis tools can be used to analyze signal integrity on the PC board and can often be amortized by one eliminated board respin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 447 of 947

JTAG Configuration and Test Signals

Poor signal integrity and limitations of devices in a JTAG scan chain can reduce the maximum JTAG test clock (TCK) rate and reliability of JTAG-based configuration and test procedures. The JTAG TCK and test mode (TMS) signals must be buffered, distributed, and routed with the same care as any clock signal especially for long JTAG scan chains. The devices in a JTAG scan chain should be ordered such that the connections from the TDO of one device to the TDI of the next device are minimized. When high-speed JTAG-based configuration for the Virtex-II Pro devices is required, devices with lower-specified maximum TCK rates should be placed in a separate JTAG scan chain.

Crosstalk

Crosstalk can happen when two signals are routed closely together. Current through one of the traces creates a magnetic field that induces current on the neighboring trace, or the voltage on the trace couples capacitively to its neighbor. Crosstalk can be accurately modeled with signal integrity software. Two easy-to-remember rules of thumb are:

- Crosstalk falls off with the square of increasing distance between the traces.
- Crosstalk also falls off with the square of decreasing distance to a ground plane.

$$Peak\ \ Crosstalk\ \ Voltage = \frac{\Delta V}{1 + (D/H)^2}$$

where

ΔV is the voltage swing

D is the distance between traces (center to center)

H is the spacing above the ground plane

Example:

3.3V swing, and two stripline traces 5 mils apart and 5 mils above the ground plane.

Peak Crosstalk Voltage = $(3.3V)/(1 + (0.005/0.005)^2) = 1.65V$

This can cause a false transition on the neighboring trace. Separating the trace by an additional 5 mils is significantly better:

Peak Crosstalk Voltage = $(3.3V)/(1 + (0.01/0.005)^2) = 0.66V$

Decoupling of V_{REF} Pins

V_{REF} pins must each have a bypass capacitor to insure that no noise is coupled onto the reference. Signal traces must be kept at least three spaces from the reference trace on either side to prevent crosstalk coupling.

Signal Routing to and from Package Pins

Signal escaping (traces leaving the pin/ball area) can be quite difficult for the large FG and flip-chip packages. The number of signal layers required to escape all the pins depends on the PCB design rules. The thinner the traces, the more signals per layer can be routed, and the fewer layers are needed. The thinner traces have higher characteristic impedance, so choose an impedance plan that makes sense, and then be consistent. Traces from 40Ω to 80Ω are common.

If only one signal can be escaped between two pads, only two rows of pins can be escaped per layer. For FG packages (1.0mm pitch) one signal of width 5 mils (0.13mm) can be

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 448 of 947

escaped between two pads, assuming a space constraint equal to the trace width. For a discussion of signal routing specific to Virtex-II Pro devices, see www.xilinx.com for currently available application notes.

As packages are able to handle more I/Os with a minimum increase in size, the signal integrity of those signals must be considered, regardless of clock frequency. Especially with the largest packages, precise PCB layer stackup is required. Parameters such as board material, trace width, pad type, and stackup must be defined based on simulation, and the fabrication drawings must be marked "Precise Layer Stackup," and the stackup must be specified. A number of board-level signal integrity simulators exist. Careful attention to PCB design rules creates a robust design with low EMI and high signal reliability.

Board Routability Guidelines

Board-Level BGA Routing Challenges

Xilinx ball grid array (BGA) wire-bond and flip-chip packages contain a matrix of solder balls (see Figure 5-75). These packages are made of multilayer BT substrates. Signal balls are in a perimeter format. Power and ground pins are grouped together appropriately.

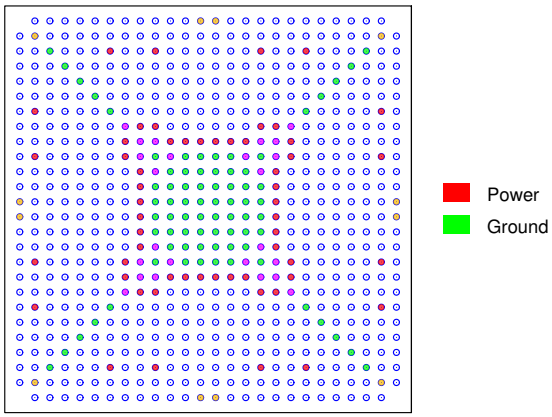


Figure 5-75: **Fine-Pitch BGA Pin Assignments**

The number of layers required for effective routing of these packages is dictated by the layout of balls in each package. If several other technologies and components are already present on the board, the system cost is factored with every added board layer. The intent of a board designer is to optimize the number of layers required to route these packages, considering both cost and performance. This section provides guidelines for minimizing required board layers for routing BGA products using standard PCB technologies (5 mil wide lines and spaces or 6 mil wide lines and spaces).

For high performance and other system needs, designers can use premium technologies with finer lines/spaces on the board. The pin assignment and pin grouping scheme in BGA packages enables efficient routing of the board with an optimum number of required board layers.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 449 of 947

Board Routing Strategy

The diameter of a land pad on the component side is provided by Xilinx. This information is required prior to the start of board layout when designing the board pads to match component-side land geometry. Typical values for these land pads are described in Figure 5-76 and summarized in Table 5-5.

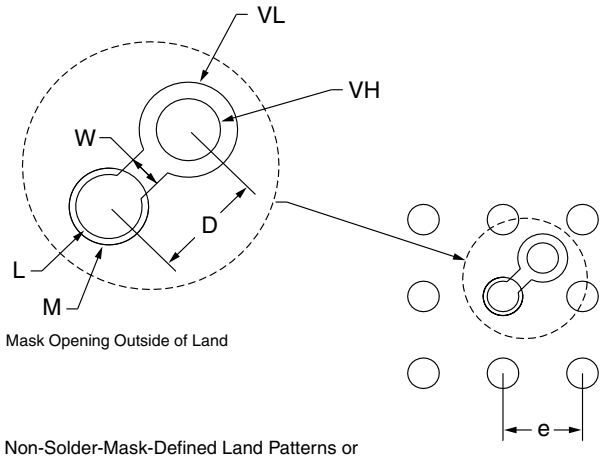


Figure 5-76: **Suggested Board Layout of Soldered Pads for BGA Packages**

Table 5-5: **Summary of Typical Land Pad Values (mm)**

Land Pad Characteristics	FG256	FG456	FG676	FF672	FF896	FF1152	FF1148	FF1517	FF1704	FF1696
Component Land Pad Diameter (SMD)(4)	0.45	0.45	0.45	0.48	0.48	0.48	0.48	0.48	0.48	0.48
Solder Land (L) Diameter	0.40	0.40	0.40	0.45	0.45	0.45	0.45	0.45	0.45	0.45
Opening in Solder Mask (M) Diameter	0.50	0.50	0.50	0.55	0.55	0.55	0.55	0.55	0.55	0.55
Solder (Ball) Land Pitch (e)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Line Width Between Via and Land (w)	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
Distance Between Via and Land (D)	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70
Via Land (VL) Diameter	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.61
Through Hole (VH), Diameter	0.300	0.300	0.300	0.300	0.300	0.300	0.300	0.300	0.300	0.300
Pad Array	Full	Full	Full	Full	Full	Full	Full	Full	Full	Full
Matrix or External Row	16 x 16	22 x 22	26 x 26	26 x 26	30 x 30	34 x 34	34 x 34	39 x 39	42 x 42	42 x 42
Periphery Rows	-	7(3)	-	-	-	-		-		

Notes:
1. Dimensions in millimeters.
1. 3 x 3 matrix for illustration only, one land pad shown with via connection.
1. FG456 package has solder balls in the center in addition to the periphery rows of balls.
1. Component land pad diameter refers to the pad opening on the component side (solder-mask defined).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 450 of 947

For Xilinx BGA packages, NSMD (Non Solder Mask Defined) pads on the board are suggested. This allows a clearance between the land metal (diameter L) and the solder mask opening (diameter M) as shown in Figure 5-76. The space between the NSMD pad and the solder mask, and the actual signal trace widths depends on the capability of the PCB vendor. The cost of the PCB is higher when the line width and spaces are smaller.

Selection of the pad types and pad sizes determines the available space between adjacent balls for signal escape. Based on PCB capability, the number of lines that can share the available space is described in Figure 5-77. Based on geometrical considerations, if one signal escapes between adjacent balls, then two signal rows can be routed on a single metal layer. This is illustrated in Figure 5-77, as routing with one line/channel, either at 6 mil lines and spaces or 5 mil lines and spaces. The blocked nature of multi-gigabit transceiver (MGT) at the top edge prevents a direct implementation of one line/channel arrangement in layer 1. Using this suggested routing scheme, a minimum of eight PCB layers are required to route up to 10 signal rows in a package.

These Virtex-II Pro BGA packages may incorporate up to 16 MGT channels per package. The balls that make up these channels are grouped within the two outer rows of top and bottom edges. This outer row arrangement allows easy escape and pairing of signals. Accommodation of any filtering schemes off the chip can be accomplished in close proximity as well.

A slightly lower trace width than that employed on the top and bottom external or exposed traces can be used by the inner signal rows routed in internal layers. Depending on the signal being handled, the practice of "necking down" a trace in the critical space between the BGA balls is allowable. Changes in width over very short distances can cause small impedance changes. Validate these issues with the board vendor and signal integrity engineers responsible for design. It is also suggested to implement the MGT signals in stripline arrangement.

Figure 5-77 describes a board-level layout strategy for a Xilinx 1.0 mm pitch FF672 package, which incorporates four MGT channels at the top edge. Detail A in Figure 5-77 describes the opening geometry for the land pad and the solder mask. Routing with 5 mil lines/trace allows one signal per channel (between the balls). For successful routing, eight-row-deep signal traces require six to eight PCB layers. Figure 5-78 shows the suggested schematic of layers for the eight-layer routing scheme. By using a premium board technology such as Microvia Technology—allowing up to 4 mil lines and spaces—efficient routing with a reduced number of board layers is made possible. A grouping scheme for power, ground, control, and I/O pins may also enable efficient routing.

Figure 5-79 and Figure 5-80 show examples of suggested layer-by-layer board escape routing strategy used to implement MGT and LVDS pairs for two of the Virtex-II Pro packages, the wire-bond FG456 and the flip-chip FF672. These drawings assume a standard PCB technology of 5 mil wide lines and spaces.

More details are contained in XAPP157, which is available on the web at www.xilinx.com/apps/xappsumm.htm#xapp157, as is a full-color (PDF) version of this document.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 451 of 947

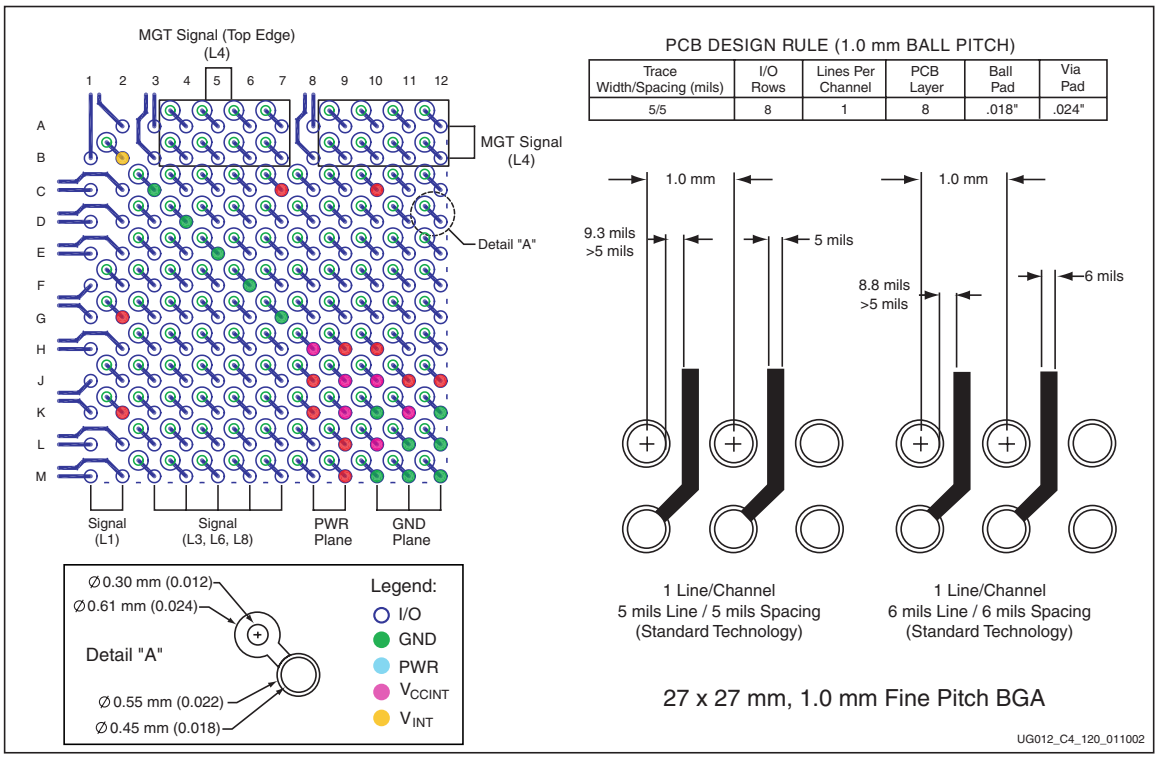


Figure 5-77: **FF672 PC Board Layout/Land Pattern**

Signal (S1)	L - 1
Power/Gnd	L - 2
Signal (S2)	L - 3
Signal (S3 – MGT)	L - 4
Power/Gnd	L - 5
Signal (S4)	L - 6
Power/Gnd	L - 7
Signal (S5)	L - 8

ug012_c4_119_010302

Figure 5-78: **Eight-Layer Routing Scheme**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 452 of 947

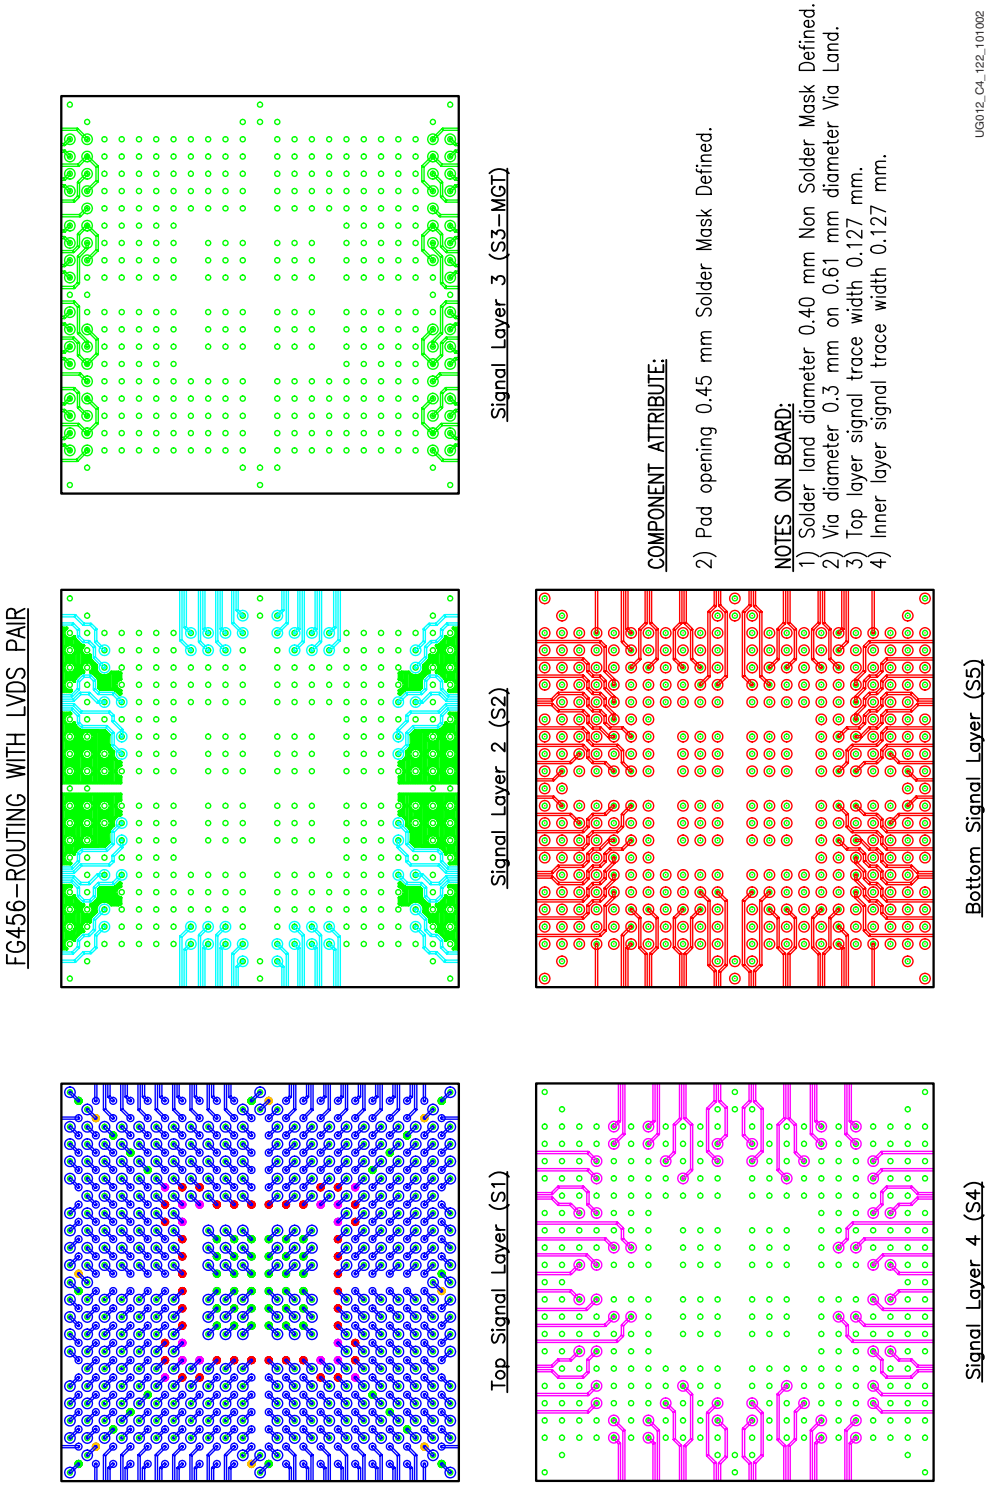


Figure 5-79: **FG456 Routing with LVDS Pairs**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 453 of 947

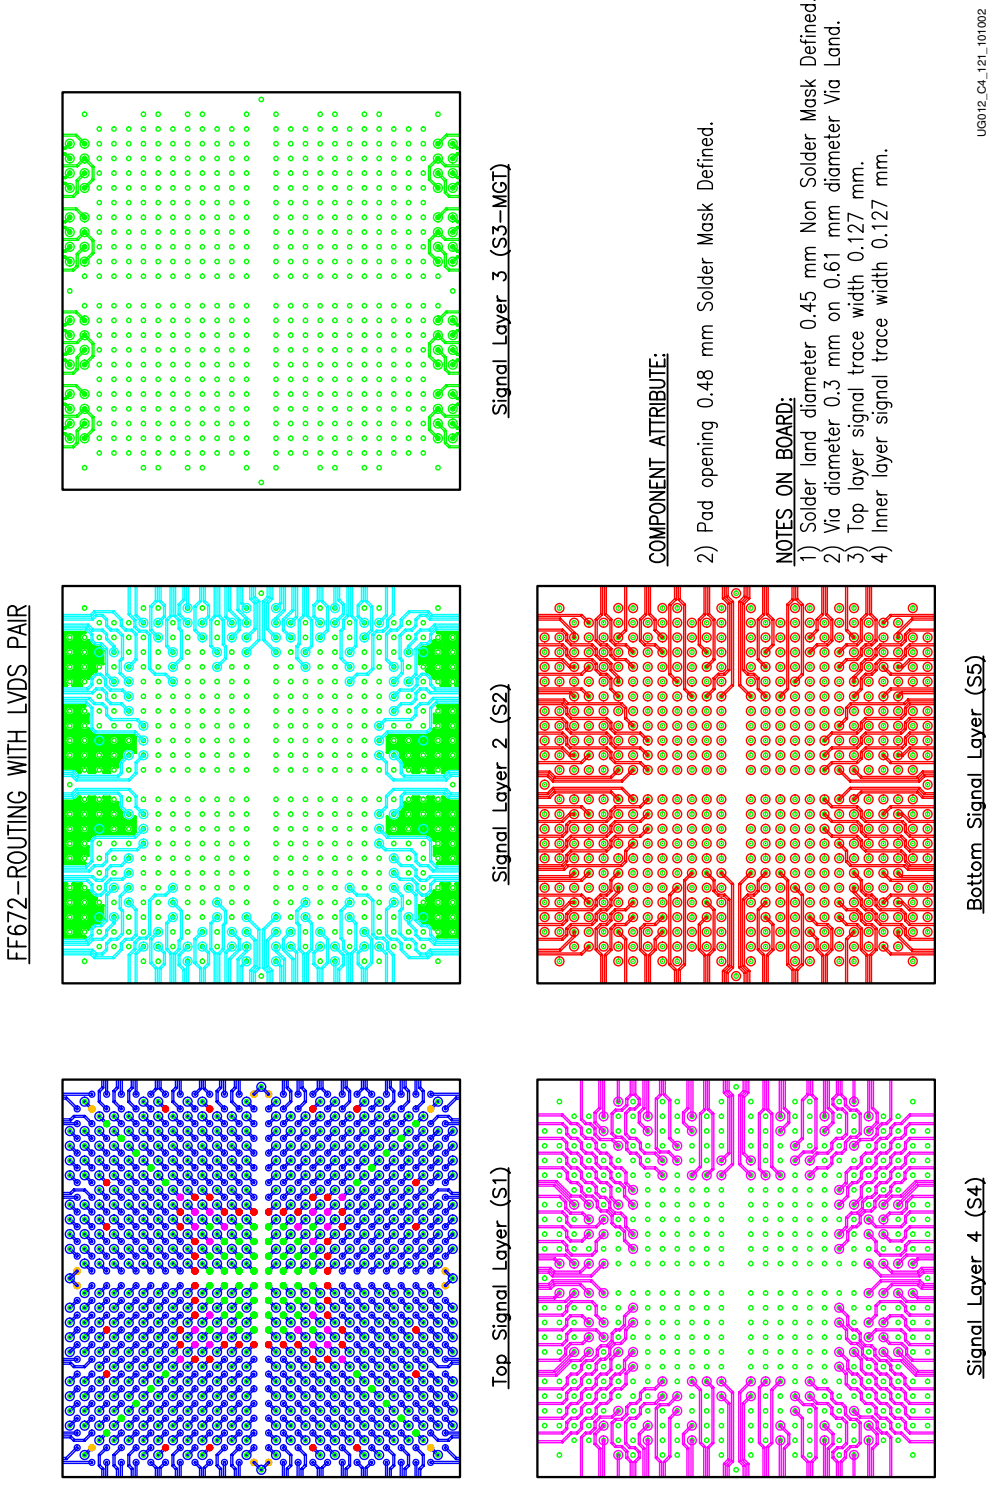


Figure 5-80: **FF672 Routing with LVDS Pairs**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 454 of 947

XPower

XPower is the first graphic power-analysis software available for programmable logic design. Earlier than ever in the design flow you can analyze total device power, power per net, routed, or partially routed or unrouted designs. You can also receive graphical or ASCII-based reports, all driven from a comprehensive graphic interface, or use a command-line driven batch-mode execution.

XPower supports Virtex-II Pro and Virtex-II advanced FPGA devices and the XPLA3 family of CPLD devices, offering the broadest device support available in programmable power estimation.

XPower also supports the importing of simulation data from ModelSim™ VCD files, greatly reducing the time spent setting up net activity, and increasing overall estimation accuracy.

XPower uses device knowledge and design data to project device power and by-net power utilization. This is a significant advance from the static estimation pages most logic providers offer their customers, and it is a leap forward in providing logic designers with accurate power dissipation information.

Features include:

- Support for Virtex-II Pro, Virtex-II, Virtex-E, Virtex, and Spartan-II FPGAs in ISE 4.1i
- XPLA3 device support through ISE WebPACK 4.1i
- VCD simulation file import for ModelSim™
- Windows 98 and NT, Windows ME and Windows 2000, and Solaris support
- Graphic and/or ASCII report formats
- Menu-driven or batch-mode execution
- Device data read directly from Xilinx layout files
- Save and recall setup data
- Recognize small voltage variations on VCC

More details are available under the Xpower link on the www.xilinx.com website.

IBIS Models

The need for higher system performance leads to faster output transitions. Signals with fast transitions cannot be considered purely digital. It is therefore important to understand their analog behavior by signal integrity analysis.

To simulate the signal integrity of printed circuit boards (PCB) accurately and solve design problems before the PCB is fabricated, models of the I/O characteristics are required. SPICE models were traditionally used for this purpose, however, a manufacturer's SPICE models contain proprietary circuit-level information. Therefore, there was a need for a model type which does not give details of the circuit topology, or process parameters. One such standard is the I/O Buffer Information Specification (IBIS) format originally suggested by Intel.

In the early 1990's, the IBIS Open Forum was formed and the first IBIS specification was written to promote tool independent I/O models for system signal integrity analysis. IBIS is now the ANSI/EIA-656 and IEC 62014-1 standard. IBIS accurately describes the signal behavior of the interconnections without disclosing the actual technology and circuitry used to implement the I/O. The standard is basically a black-box approach to protect proprietary information.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 455 of 947

Using IBIS Models

IBIS models can be used by designers for system-level analysis of signal integrity issues, such as ringing, ground bounce, cross talk, and predicting RFI/EMI. Complete designs can be simulated and evaluated before going through the expensive and time consuming process of producing prototype PCBs. This type of pre-layout simulation can considerably reduce the development cost and time to market, while increasing the reliability of the I/O operation.

IBIS models consist of look-up tables that predict the I/V characteristics and dV/dt of integrated circuit inputs and outputs when combined with PCB traces, cables and passive components. The data is extracted for the typical case, minimum case (weak transistors, low VCC, hot temperatures) and maximum case (strong transistors, high VCC, cold temperatures).

IBIS models have a limitation in that they do not contain internal delays. IBIS models contain package parasitic information for simulation of ground bounce. However, not all simulators are able to use this data to simulate ground bounce. Simulation results may not agree with measurement results due to package, die, PCB trace and ground plane modeling inaccuracies. Similarly, because simultaneous switching outputs (SSOs) are also difficult to model, only a first approximation is provided to the designer.

IBIS Generation

IBIS models are generated either from SPICE simulations or from actual device measurements. A SPICE netlist of the I/O buffer is required to produce V/I and dV/dt simulation curve data. The SPICE simulation data is then converted to an IBIS format/syntax file.

IBIS models that are derived from measurement data do not have process corner information, unlike IBIS models that are derived from SPICE simulation data. It is only practical to measure a few parts, and it is therefore impossible to represent the extremes of production by such a method.

Advantages of IBIS

Using IBIS models has a great advantage to the user in that simulation speed is significantly increased over SPICE, while accuracy is only slightly decreased. Non-convergence, which can be a problem with SPICE models and simulators, is eliminated in IBIS simulation. Virtually all EDA vendors presently support IBIS models and ease of use of these IBIS simulators is generally very good. IBIS models for most devices are freely available over the Internet, making it easy to simulate several different manufacturers devices on the same board.

IBIS File Structure

An IBIS file contains two sections, the header and the model data for each component. One IBIS file can describe several devices. The following is the contents list in a typical IBIS file:

- IBIS Version
- File Name
- File Revision
- Component
- Package R/L/C
- Pin name, model, R/L/C

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 456 of 947

- Model (i.e., 3-state)
- Temperature Range (typical, minimum, and maximum)
- Voltage Range (typical, minimum, and maximum)
- Pull-Up Reference
- Pull-Down Reference
- Power Clamp Reference
- Ground Clamp Reference
- I/V Tables for:
  - Pull-Up
  - Pull-Down
  - Power Clamp
  - Ground Clamp
- Rise and Fall dV/dt for minimum, typical, and maximum conditions (driving 50Ω)
- Package Model (optional) `<package_number>.pkg` with RLC sections.

IBIS I/V and dV/dt Curves

A digital buffer can be measured in receive (3-state) mode and drive mode. IBIS I/V curves are based on the data of both these modes. The transition between modes is achieved by phasing in/out the difference between the driver and the receiver models, while keeping the receiver model constantly in the circuit.

The I/V curve range required by the IBIS specification is $-V_{CC}$ to ($2xV_{CC}$). This wide voltage range exists because the theoretical maximum overshoot due to a full reflection is twice the signal swing. The ground clamp I/V curve must be specified over the range $-V_{CC}$ to V_{CC}, and the power clamp I/V curve must be specified from V_{CC} to ($2xV_{CC}$).

The three supported conditions for the IBIS buffer models are typical values (required), minimum values (optional), and maximum values (optional). For CMOS buffers, the minimum condition is defined as high temperature and low supply voltage, and the maximum condition is defined as low temperature and high supply voltage.

An IBIS model of a digital buffer has four I/V curves:

- The pull-down I/V curve contains the mode data for the driver driving low. The origin of the curve is at 0V for CMOS buffers.
- The pull-up I/V curve contains the mode data for the driver driving high. The origin of the curve is at the supply voltage (V_{CC} or V_{DD}).
- The ground clamp I/V curve contains receive (3-state) mode data, with the origin of the curve at 0V for CMOS buffers.
- The power clamp I/V curve contains receive (3-state) mode data, with the origin of the curve at the supply voltage (V_{CC} or V_{DD}). For 3.3V buffers that are 5V tolerant, the power clamp is referenced to 5V while the pull-up is referenced to 3.3V.

Ramp and dV/dt Curves

The Ramp keyword contains information on how fast the pull-up and pull-down transistors turn on/off. The dV/dt curves give the same information, while including the effects of die capacitance (C_comp). C_comp is the total die capacitance as seen at the die pad, excluding the package capacitance.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 457 of 947

dV/dt curves describe the transient characteristics of a buffer more accurately than ramps. A minimum of four dV/dt curves are required to describe a CMOS buffer: pull-down ON, pull-up OFF, pull-down OFF, and pull-up ON. dV/dt curves incorporate the clock-to-out delay, and the length of the dV/dt curve corresponds to the clock speed at which the buffer is used. Each dV/dt curve has t = 0, where the pulse crosses the input threshold.

Xilinx IBIS Package Parasitic Modelling

Xilinx IBIS modeling previously used a simple RCL model for the pin and bond wire parasitics. Due to the fast rise and fall times of many of the supported I/O standards, it was deemed necessary to improve the package parasitic modeling. The latest IBIS 3.2 specification has a complex parasitic package model, which incorporates a transmission line and lumped RCL model. Unfortunately, IBIS 3.2 is still not widely supported by simulators.

For these reasons, **the old lumped package parasitic parameters have been removed from the latest models, and the user should now manually add an external transmission line**. A 65Ω ideal transmission line, with the delay set at 25 ps to 100 ps, is recommended. This works in conjunction with a revised lumped model (included inside the IBIS model). For critical applications, both extremes (25 ps and 100 ps) should be checked. However, for most I/O applications this difference is very small.

IBIS Simulations

The circuit shown in Figure 5-81 models a Virtex-II Pro LVCMOS_18F driver and receiver, connected by a 6-inch 50Ω circuit board trace. The rise and fall simulation results show that there is a large amount of overshoot and undershoot, which is actually limited by the IOB clamp diodes.

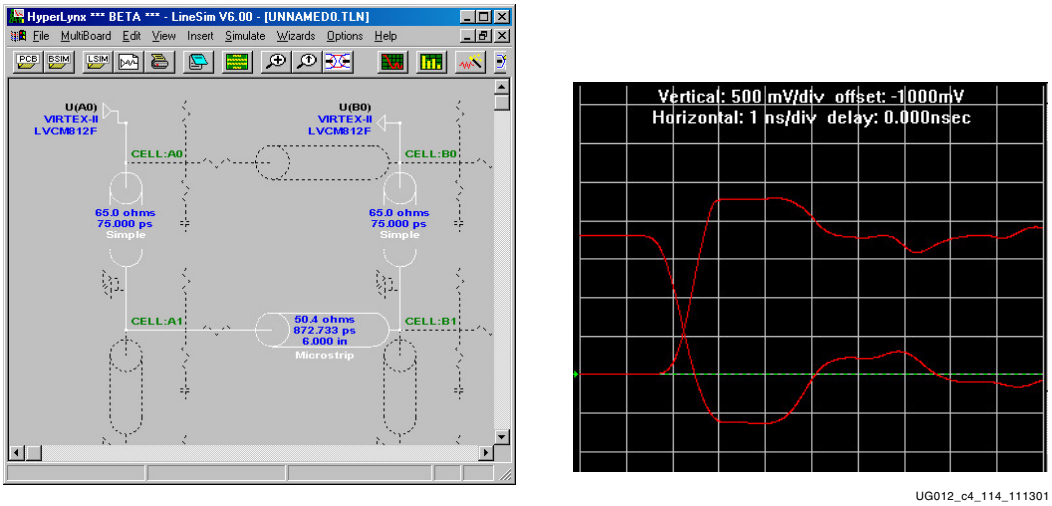


Figure 5-81: **Unterminated Example**

By adding a series termination resistor to the driver output, the overshoot and undershoot can be effectively controlled. The simulation results in Figure 5-82 show that by adding a 25Ω termination there is minimal overshoot and undershoot.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 458 of 947

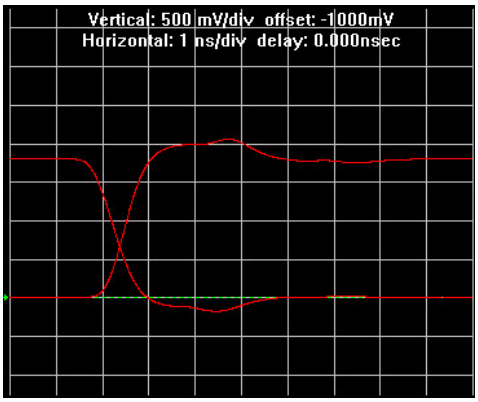


Figure 5-82: **Series Termination Example**

An alternative is to use a DCI source impedance controlled driver. The results shown in Figure 5-83 show the waveforms from an LVDCI_18 driver, which has virtually no overshoot or undershoot.

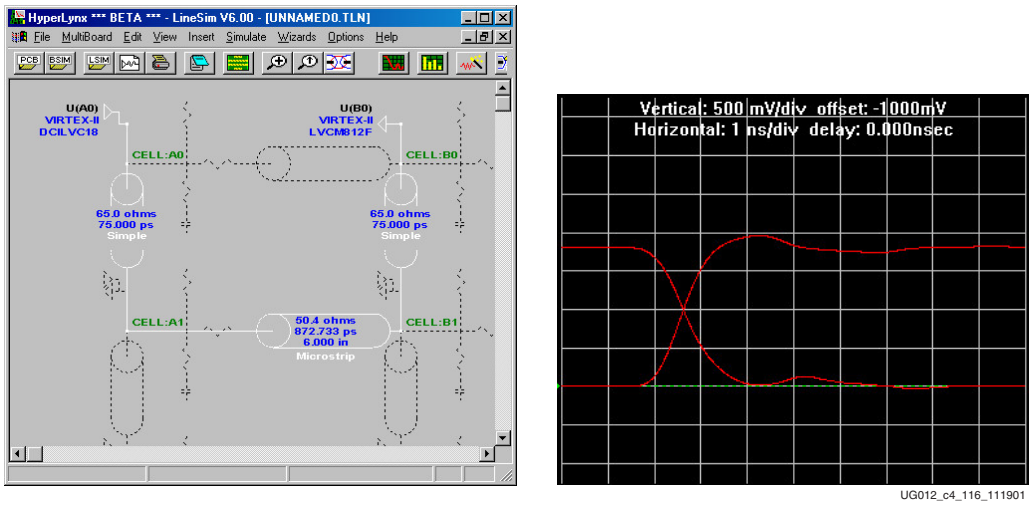


Figure 5-83: **DCI Driver Example**

IBIS Simulators

Several different IBIS simulators are available today, and each simulator provides different results. An overshoot or undershoot of ±10% of the measured result is tolerable. Differences between the model and measurements occur because not all parameters are modeled. Simulators for IBIS models are provided by Cadence, Avanti Corporation, Hyperlynx, Mentor, Microsim, Intusoft, Veribest, and Viewlogic.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 459 of 947

Xilinx IBIS Advantages

Xilinx provides preliminary IBIS files before working silicon has been verified (before tape out), as well as updated versions of IBIS files after the ICs are verified. Preliminary IBIS files are generated from SPICE models before working silicon has been verified. After the IC (device) is verified, appropriate changes are made to the existing IBIS files. These IBIS files are available at the web site http://www.xilinx.com/support/sw_ibis.htm

ANSI/EIA IBIS Official Website

http://www.eigroup.org/ibis/ibis.htm

BSDL and Boundary Scan Models

Boundary scan is a technique that is used to improve the testability of ICs. With Virtex-II Pro devices, registers are placed on I/Os that are connected together as a long shift register. Each register can be used to either save or force the state of the I/O. There are additional registers for accessing test modes.

The most common application for boundary scan is testing for continuity of the IC to the board. Some packages make visual inspection of solder joints impossible, e.g. BGA. The large number of I/Os available requires the use of such packages, and also increases the importance of testing. A large number of I/Os also means a long scan chain.

Test software is available to support testing with boundary scan. The software requires a description of the boundary scan implementation of the IC. The IEEE 1149.1 specification provides a language description for Boundary Scan Description Language (BSDL). Boundary scan test software accepts BSDL descriptions.

The IEEE 1149.1 spec also defines a 4 to 5 pin interface known as the JTAG interface. IEEE 1532 is a capability extension of IEEE 1149.1.

BSDL Files

Preliminary BSDL files are provided from the IC Design Process. Final BSDL files have been verified by an external third party test and verification vendor. Table 5-6 lists the Virtex-II Pro BSDL file names.

Table 5-6: **Virtex-II Pro BSDL File Names**

XC2VP2_FG256.BSD	XC2VP20_FG696.BSD	XC2VP50_FF1152.BSD
XC2VP2_FG456.BSD	XC2VP20_FF896.BSD	XC2VP50_FF1148.BSD
XC2VP2_FF672.BSD	XC2VP20_FF1152.BSD	XC2VP50_FF1517.BSD
XC2VP4_FG256.BSD	XC2VP30_FG696.BSD	XC2VP70_FF1517.BSD
XC2VP4_FG456.BSD	XC2VP30_FF896.BSD	XC2VP70_FF1704.BSD
XC2VP4_FF672.BSD	XC2VP30_FF1152.BSD	XC2VP100_FF1704.BSD
XC2VP7_FG456.BSD	XC2VP40_FG696.BSD	XC2VP100_FF1696.BSD
XC2VP7_FF672.BSD	XC2VP40_FF1152.BSD	XC2VP125_FF1704.BSD
XC2VP7_FF896.BSD	XC2VP40_FF1148.BSD	XC2VP125_FF1696.BSD

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 460 of 947

Appendix A

BitGen and PROMGen Switches and Options

Using BitGen

BitGen produces a bitstream for Xilinx device configuration. After the design has been completely routed, it is necessary to configure the device so that it can execute the desired function. The Xilinx bitstream necessary to configure the device is generated with BitGen. BitGen takes a fully routed NCD (Circuit Description) file as its input and produces a configuration bitstream—a binary file with a `.bit` extension.

The BIT file contains all of the configuration information from the NCD file defining the internal logic and interconnections of the FPGA, plus device-specific information from other files associated with the target device. The binary data in the BIT file can then be downloaded into the FPGA memory cells, or it can be used to create a PROM file (see Figure A-1).

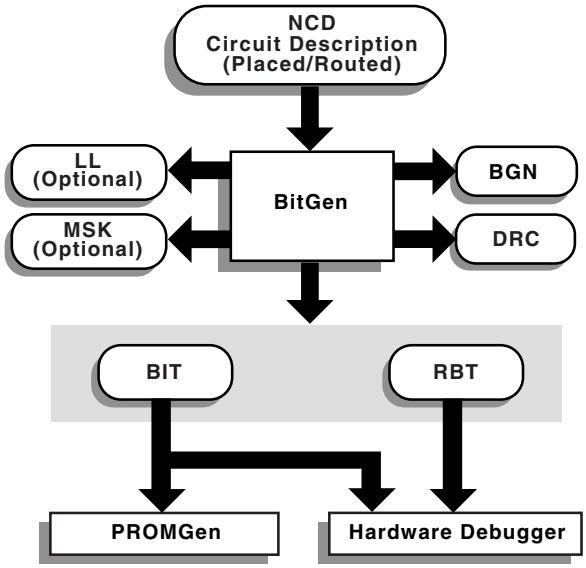


Figure A-1: **BitGen**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 461/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 461 of 947

BitGen Syntax

The following syntax creates a bitstream from your NCD file.

```
bitgen [<options>] <infile[.ncd]> [<outfile>] [<pcf_file>]
```

options is one or more of the options listed in "BitGen Options," page 459.

<infile> is the name of the NCD design for which you want to create the bitstream. You can specify only one design file, and it must be the first file specified on the command line.

You do not have to use an extension. If you do not, `.ncd` is assumed. If you do use an extension, it must be `.ncd`.

<outfile> is the name of the output file. If you do not specify an output file name, BitGen creates one in the same directory as the input file. If you specify **`-l`** on the command line, the extension is `.ll` (see **`-l`** command line option). If you specify **`-m`** (see **`-m`** command line option), the extension is `.msk`. If you specify **`-b`**, the extension is `.rbt`. Otherwise, the extension is `.bit`. If you do not specify an extension, BitGen appends one according to the aforementioned rules. If you do include an extension, it must also conform to the rules.

<pcf_file> is the name of a physical constraints (`.pcf`) file. BitGen uses this file to determine which nets in the design are critical for tiedown, which is not available for Virtex families. BitGen automatically reads the `.pcf` file by default. If the physical constraints file is the second file specified on the command line, it must have a `.pcf` extension. If it is the third file specified, the extension is optional; `.pcf` is assumed. If a `.pcf` file name is specified, it must exist, otherwise the input design name with a `.pcf` extension is read if that file exists.

A report file containing all BitGen's output is automatically created under the same directory as the output file. The report file has the same root name as the output file with a `.bgn` extension.

BitGen Files

This section describes input files that BitGen requires and output files that BitGen generates.

Input Files

Input to BitGen consists of the following files.

- **NCD file**—a physical description of the design mapped, placed and routed in the target device. The NCD file must be fully routed.
- **PCF file**—an optional user-modifiable ASCII Physical Constraints File. If you specify a PCF file on the BitGen command line, BitGen uses this file to determine which nets in the design are critical for tiedown (not used for Virtex families).

Output Files

Output from BitGen consists of the following files.

- **BIT file**—a binary file with a `.bit` extension. The BIT file contains all of the configuration information from the NCD file defining the internal logic and interconnections of the FPGA, plus device-specific information from other files associated with the target device. The binary data in the BIT file can then be downloaded into the FPGA memory cells, or it can be used to create a PROM file (see "Using PROMGen," page 465).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 462 of 947

- **RBT file**—an optional "rawbits" file with a `.rbt` extension. The rawbits file is ASCII ones and zeros representing the data in the bitstream file. If you enter a **`-b`** option on the BitGen command line, an RBT file is produced in addition to the binary BIT file (see "-b (Create Rawbits File)," page 459).
- **LL file**—an optional ASCII logic allocation file with a .ll extension. The logic allocation file indicates the bitstream position of latches, flip-flops, and IOB inputs and outputs. A .ll file is produced if you enter a **`-l`** option on the BitGen command line ("-l (Create a Logic Allocation File)," page 465).
- **MSK file**—an optional mask file with a `.msk` extension. This file is used to compare relevant bit locations for executing a readback of configuration data contained in an operating FPGA. A MSK file is produced if you enter a **`-m`** option on the BitGen command line (see "-m (Generate a Mask File)," page 465).
- **BGN file**—a report file containing information about the BitGen run.
- **DRC file**—a Design Rule Check (DRC) file for the design. A DRC runs and the DRC file is produced unless you enter a **`-d`** option on the BitGen command line (see "-d (Do Not Run DRC)," page 459).

BitGen Options

Following is a description of command line options and how they affect BitGen behavior.

`-b` (Create Rawbits File)

Create a "rawbits" <*file_name*>`.rbt` file. The rawbits file consists of ASCII ones and zeros representing the data in the bitstream file.

If you are using a microprocessor to configure a single FPGA, you can include the rawbits file in the source code as a text file to represent the configuration data. The sequence of characters in the rawbits file is the same as the sequence of bits written into the FPGA.

`-d` (Do Not Run DRC)

Do not run DRC (Design Rule Check). Without the **`-d`** option, BitGen runs a DRC and saves the DRC results in two output files: the BitGen report file <*file_name*>`.bgn` and the DRC file (<*file_name*>`.drc`). If you enter the **`-d`** option, no DRC information appears in the report file and no DRC file is produced.

Running DRC before a bitstream is produced detects any errors that could cause the FPGA to malfunction. If DRC does not detect any errors, BitGen produces a bitstream file (unless you use the **`-j`** option described in the "-j (No BIT File)," page 465).

`-f` (Execute Commands File)

`-f` <*command_file*>

The **`-f`** option executes the command line arguments in the specified <*command_file*>.

`-g` (Set Configuration)

`-g` <*option*>**`:`**<*setting*>

The **`-g`** option specifies the startup timing and other bitstream options for Xilinx FPGAs. The settings for the **`-g`** option depend on the design's architecture. These options have the following syntax:

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 463 of 947

Binary

Creates a binary file with programming data only. Use this option to extract and view programming data. Any changes to the header will not affect the extraction process.

Settings: No, Yes
Default: No

CclkPin

Adds an internal pull-up to the Cclk pin. The Pullnone setting disables the pullup.

Settings: Pullnone, Pullup
Default: Pullup

Compress

This option uses the multiple frame write feature in the bitstream to reduce the size of the bitstream, not just the .bit file. Using the Compress option does not guarantee that the size of the bitstream will shrink.

ConfigRate

Virtex-II Pro uses an internal oscillator to generate the configuration clock, CCLK, when configuring in a master mode. Use the configuration rate option to select the rate for this clock.

Settings: 4, 5, 7, 8, 9, 10, 13, 15, 20, 26, 30, 34, 41, 45, 51, 55, 60
Default: 4

DCMShutdown

When DCMShutdown is enabled, the DCM (Digital Clock Manager) resets if the SHUTDOWN and AGHIGH commands are loaded into the configuration logic.

Settings: Disable, Enable
Default: Disable

DebugBitstream

If the device does not configure correctly, you can debug the bitstream using the DebugBitstream option. A debug bitstream is significantly larger than a standard bitstream. The values allowed for the DebugBitstream option are No and Yes.

Note: You should use this option only if your device is configured to use slave or master serial mode.

Values: No, Yes

In addition to a standard bitstream, a debug bitstream offers the following features:

- Writes 32 0s to the LOUT register after the synchronization word
- Loads each frame individually
- Performs a cyclical redundancy check (CRC) after each frame
- Writes the frame address to the LOUT register after each frame

DisableBandgap

Disables bandgap generator for DCMs to save power.

Settings: No, Yes
Default: No

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 464 of 947

DONE_cycle

Selects the Startup phase that activates the FPGA Done signal. Done is delayed when DonePipe=Yes.

Settings: 1, 2, 3, 4, 5, 6
Default: 4

DonePin

Adds an internal pull-up to the DONE Pin pin. The Pullnone setting disables the pullup.

Use this option only if you are planning to connect an external pull-up resistor to this pin. The internal pull-up resistor is automatically connected if you do not use this option.

Settings: Pullup, Pullnone
Default: Pullup

DonePipe

This option is intended for use with FPGAs being set up in a high-speed daisy chain configuration. When set to Yes, the FPGA waits on the CFG_DONE (DONE) pin to go High and then waits for the first clock edge before moving to the Done state.

Settings: No, Yes
Default: No

DriveDone

This option actively drives the DONE Pin high as opposed to using a pullup.

Settings: No, Yes
Default: No

Encrypt

Encrypts the bitstream. (For more information, see "Bitstream Encryption" in Chapter 3.)

Settings: No, Yes
Default: No

GTS_cycle

Selects the Startup phase that releases the internal 3-state control to the I/O buffers. The Done setting releases GTS when the DoneIn signal is High. DoneIn is either the value of the Done pin or a delayed version if DonePipe=Yes

Settings: Done, 1, 2, 3, 4, 5, 6, Keep
Default: 5

GWE_cycle

Selects the Startup phase that asserts the internal write enable to flip-flops, LUT RAMs, and shift registers. It also enables the BRAMs. Before the Startup phase both BRAM writing and reading are disabled.The Done setting asserts GWE when the DoneIn signal is High. DoneIn is either the value of the Done pin or a delayed version if DonePipe=Yes. The Keep setting is used to keep the current value of the GWE signal

Settings: Done, 1, 2, 3, 4, 5, 6, Keep
Default: 6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 465 of 947

Key0, Key1, Key2, Key3, Key4, Key5

Sets Key*x* for bitstream encryption. The Pick option causes BitGen to select a random number for the value. (For more information, see "Bitstream Encryption" in Chapter 3.)

Settings: Pick, <*hex_string*>
Default: Pick

KeyFile

Specifies the name of the input encryption file.

Settings: <*string*>

Keyseq0, Keyseq1, Keyseq2, Keyseq3, Keyseq4, Keyseq5

Sets the key sequence for key*x*. The settings are equal to the following:

- **S** = single
- **F** = first
- **M** = middle
- **L** = last

Settings: S, F, M, L
Default: S

LCK_cycle

Selects the Startup phase to wait until DLLs/DCMs lock. If NoWait is selected, the Startup sequence does not wait for DLLs/DCMs.

Settings: 0, 1, 2, 3, 4, 5, 6, NoWait
Default: NoWait

M0Pin

The M0 pin is used to determine the configuration mode. Adds an internal pull-up, pull-down or neither to the M0 pin. The following settings are available. The default is PullUp. Select Pullnone to disable both the pull-up resistor and pull-down resistor on the M0 pin.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

M1Pin

The M1 pin is used to determine the configuration mode. Adds an internal pull-up, pull-down or neither to the M1 pin. The following settings are available. The default is PullUp. Select Pullnone to disable both the pull-up resistor and pull-down resistor on the M1 pin.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

M2Pin

The M2 pin is used to determine the configuration mode. Adds an internal pull-up, pull-down or neither to the M2 pin. The default is PullUp. Select Pullnone to disable both the pull-up resistor and pull-down resistor on the M2 pin.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 466 of 947

Match_cycle

Specifies a stall in this Startup cycle until DCI (Digitally Controlled Impedance) match signals are asserted.

Settings: NoWait, 0, 1, 2, 3, 4, 5, 6
Default: NoWait

Persist

This option is needed for Readback and Partial Reconfiguration using the SelectMAP configuration pins. If Persist is set to Yes, the pins used for SelectMAP mode are prohibited for use as user IO. Refer to the data sheet for a description of SelectMAP mode and the associated pins.

Settings: No, Yes
Default: No

ProgPin

Adds an internal pull-up to the ProgPin pin. The Pullnone setting disables the pull-up. The pull-up affects the pin after configuration.

Settings: Pullup, Pullnone
Default: Pullnone

ReadBack

This option allows you to perform Readback by the creating the necessary bitstream. When specifying the -g Readback option, the .rba, .rbb, .rbd, and .msd file are created.

Security

Selecting Level1 disables Readback. Selecting Level2 disables Readback and Partial Reconfiguration.

Settings: None, Level1, Level2
Default: None

StartCBC

Sets the starting CBC (Cipher Block Chaining) value. The pick option causes BitGen to select a random number for the value.

Settings: Pick, *<hex_string>*
Default: Pick

StartKey

Sets the starting key number.

Settings: 0, 3
Default: 0

StartupClk

The startup sequence following the configuration of a device can be synchronized to either Cclk, a User Clock, or the JTAG Clock. The default is Cclk.

- **Cclk**

  Enter Cclk to synchronize to an internal clock provided in the FPGA device.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 467 of 947

- **JTAG Clock**

  Enter JtagClk to synchronize to the clock provided by JTAG. This clock sequences the TAP controller which provides the control logic for JTAG.

- **UserClk**

  Enter UserClk to synchronize to a user-defined signal connected to the CLK pin of the STARTUP symbol.

  Settings: Cclk (pin—see Note), UserClk (user-supplied), JtagCLK
  Default: Cclk

Note: In modes where Cclk is an output, the pin is driven by an internal oscillator.

TckPin

Adds a pull-up, a pull-down or neither to the TCK pin, the JTAG test clock. Selecting one setting enables it and disables the others. The Pullnone setting indicates there is no connection to either the pull-up or the pull-down.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

TdiPin

Adds a pull-up, a pull-down, or neither to the TDI pin, the serial data input to all JTAG instructions and JTAG registers. Selecting one setting enables it and disables the others. The Pullnone setting indicates there is no connection to either the pull-up or the pull-down.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

TdoPin

Adds a pull-up, a pull-down, or neither to the TdoPin pin, the serial data output for all JTAG instruction and data registers. Selecting one setting enables it and disables the others. The Pullnone setting indicates there is no connection to either the pull-up or the pull-down.

Settings: Pullup, Pulldown, Pullnone
Default: Pullup

TmsPin

This option selects an internal pullup or pulldown on the TMS (JTAG Mode Select) pin.

Settings: Pullnone, Pullup, Pulldown
Default: Pullup

UnusedPin

Adds a pull-up, a pull-down, or neither to the UnusedPin, the serial data output for all JTAG instruction and data registers. Selecting one setting enables it and disables the others. The Pullnone setting indicates there is no connection to either the pull-up or the pull-down.

The following settings are available. The default is PullDown.

Settings: Pullup, Pulldown, Pullnone
Default: Pulldown

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 468 of 947

UserID

You can enter up to an 8-digit hexadecimal code in the User ID register. You can use the register to identify implementation revisions.

-h or -help (Command Usage)

-h *<architecture>*

Displays a usage message for BitGen. The usage message displays all available options for BitGen operating on the specified *<architecture>*.

-j (No BIT File)

Do not create a bitstream file (`.bit` file). This option is generally used when you want to generate a report without producing a bitstream. For example, if you wanted to run DRC without producing a bitstream file, you would use the **-j** option.

Note: The `.msk` or `.rbt` files might still be created.

-l (Create a Logic Allocation File)

This option creates an ASCII logic allocation file (`<design>.ll`) for the selected design. The logic allocation file indicates the bitstream position of latches, flip-flops, and IOB inputs and outputs.

In some applications, you may want to observe the contents of the FPGA internal registers at different times. The file created by the **-l** option helps you identify which bits in the current bitstream represent outputs of flip-flops and latches. Bits are referenced by frame and bit number within the frame.

The Hardware Debugger uses the `design.ll` file to locate signal values inside a readback bitstream.

-m (Generate a Mask File)

Creates a mask file. This file is used to compare relevant bit locations for executing a readback of configuration data contained in an operating FPGA.

-w (Overwrite Existing Output File)

Enables you to overwrite an existing `.bit`, `.ll`, `.msk`, or `.rbt` output file.

Using PROMGen

The PROMGen program is compatible with the following families.

- Virtex/Virtex-E/Virtex-II/Virtex-II Pro

PROMGen formats a BitGen-generated configuration bitstream (BIT) file into a PROM format file (Figure A-2).

The PROM file contains configuration data for the FPGA device. PROMGen converts a BIT file into one of three PROM formats: MCS-86 (Intel), EXORMAX (Motorola), or TEKHEX (Tektronix). It can also generate a Hex file format.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 469 of 947

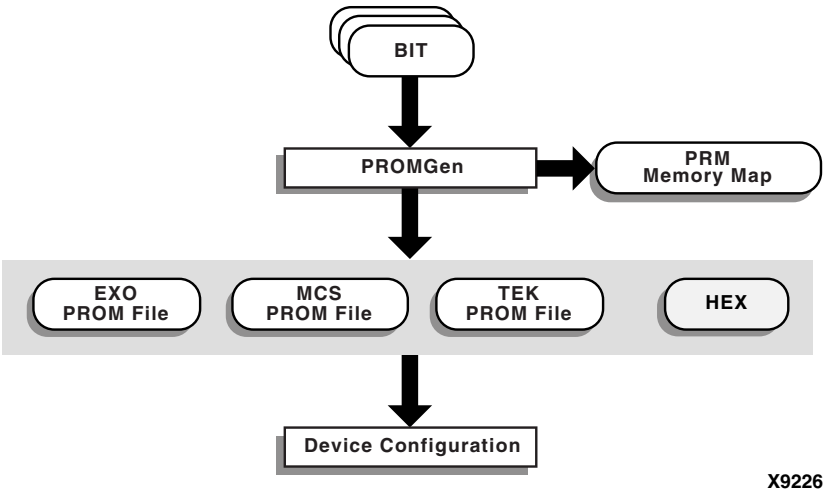


Figure A-2: **PROMGen**

There are two functionally equivalent versions of PROMGen. There is a stand-alone version you can access from an operating system prompt. You can also access an interactive version, called the PROM File Formatter, from inside the Design Manager for Alliance or the Project Manager in Foundation. This chapter describes the stand-alone version; the interactive version is described in the *PROM File Formatter Guide*.

You can also use PROMGen to concatenate bitstream files to daisy-chain FPGAs.

> ***Note:*** If the destination PROM is one of the Xilinx Serial PROMs, you are using a Xilinx PROM Programmer, and the FPGAs are not being daisy-chained, it is not necessary to make a PROM file. See the *Hardware User Guide* for more information about daisy-chained designs.

PROMGen Syntax

Use the following syntax to start PROMGen from the operating system prompt:

```
promgen [<options>]
```

`[<options>]` can be any number of the options listed in "PROMGen Options," page 467. Separate multiple options with spaces.

PROMGen Files

This section describes the PROMGen input and output files.

Input Files

The input to PROMGEN consists of BIT files— one or more bitstream files. BIT files contain configuration data for an FPGA design.

Output Files

Output from PROMGEN consists of the following files.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 470 of 947

- **PROM files**—The file or files containing the PROM configuration information. Depending on the PROM file format used by the PROM programmer, you can output a TEK, MCS, or EXO file. If you are using a microprocessor to configure your devices, you can output a HEX file, containing a hexadecimal representation of the bitstream.
- **PRM file**—The PRM file is a PROM image file. It contains a memory map of the output PROM file. The file has a `.prm` extension.

Bit Swapping in PROM Files

PROMGen produces a PROM file in which the bits within a byte are swapped compared to the bits in the input BIT file. Bit swapping (also called "bit mirroring") reverses the bits within each byte, as shown in Figure A-3.

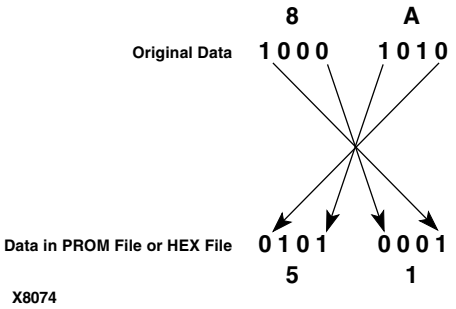


Figure A-3: **Bit Swapping**

In a bitstream contained in a BIT file, the Least Significant Bit (LSB) is always on the left side of a byte. But when a PROM programmer or a microprocessor reads a data byte, it identifies the LSB on the right side of the byte. In order for the PROM programmer or microprocessor to read the bitstream correctly, the bits in each byte must first be swapped so they are read in the correct order.

In this release of the Xilinx Development System, the bits are swapped for all of the PROM formats: MCS, EXO, and TEK. For a HEX file output, bit swapping is on by default, but it can be turned off by entering a **`-b`** PROMGen option that is available only for HEX file format.

PROMGen Options

This section describes the options that are available for the PROMGen command.

`-b` (Disable Bit Swapping—HEX Format Only)

This option only applies if the **`-p`** option specifies a HEX file for the output of PROMGen. By default (no **`-b`** option), bits in the HEX file are swapped compared to bits in the input BIT files. If you enter a **`-b`** option, the bits are not swapped. Bit swapping is described in "Bit Swapping in PROM Files," page 467.

`-c` (Checksum)

```
promgen -c
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 471/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 471 of 947

The **-c** option generates a checksum value appearing in the `.prm` file. This value should match the checksum in the prom programmer. Use this option to verify that correct data was programmed into the prom.

-d (Load Downward)

```
promgen -d <hexaddress0> <filename> <filename> ...
```

This option loads one or more BIT files from the starting address in a downward direction. Specifying several files after this option causes the files to be concatenated in a daisy-chain. You can specify multiple **-d** options to load files at different addresses. You must specify this option immediately before the input bitstream file.

The multiple file syntax is as follows:

```
promgen -d <hexaddress0> <filename> <filename> ...
```

The multiple **-d** options syntax is as follows:

```
promgen -d <hexaddress1> <filename> -d <hexaddress2> <filename> ...
```

-f (Execute Commands File)

```
-f <command_file>
```

The **-f** option executes the command line arguments in the specified *<command_file>*.

-help (Command Help)

This option displays help that describes the PROMGen options.

-l option (Disable Length Count)

```
promgen -l
```

The **-l** option disables the length counter in the FPGA bitstream. It is valid only for 4000EX, 4000XL, 4000XLA, 4000XV, and SpartanXL Devices. Use this option when chaining together bitstreams exceeding the 24-bit limit imposed by the length counter.

-n (Add BIT FIles)

```
-n <file1[.bit]> <file2[.bit]> ...
```

This option loads one or more BIT files up or down from the next available address following the previous load. The first **-n** option *must* follow a **-u** or **-d** option because **-n** does not establish a direction. Files specified with this option are not daisy-chained to previous files. Files are loaded in the direction established by the nearest prior **-u**, **-d**, or **-n** option.

The following syntax shows how to specify multiple files. When you specify multiple files, PROMGen daisy-chains the files.

```
promgen -d <hexaddress> <file0> -n <file1> <file2> ...
```

The following syntax when using multiple **-n** options prevents the files from being daisy-chained:

```
promgen -d <hexaddress> <file0> -n <file1> -n <file2> ...
```

-o (Output File Name)

```
-o <file1>[.<ext>] <file2>[.<ext>] ...
```


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 472 of 947

This option specifies the output file name of a PROM if it is different from the default. If you do not specify an output file name, the PROM file has the same name as the first BIT file loaded.

`.ext` is the extension for the applicable PROM format.

Multiple file names may be specified to split the information into multiple files. If only one name is supplied for split PROM files (by you or by default), the output PROM files are named *<file>_<#>.<ext>*, where *<file>* is the base name, *<#>* is 0, 1, etc., and *<ext>* is the extension for the applicable PROM format.

```
promgen -d <hexaddress> <file0> -o <filename>
```

-p (PROM Format)

```
-p {mcs | exo | tek | hex}
```

This option sets the PROM format to one of the following: MCS (Intel MCS86), EXO (Motorola EXORMAX), TEK (Tektronix TEKHEX). The option may also produce a HEX file, which is a hexadecimal representation of the configuration bitstream used for microprocessor downloads. If specified, the **-p** option must precede any **-u**, **-d**, or **-n** options. The default format is MCS.

-r (Load PROM File)

```
-r <promfile>
```

This option reads an existing PROM file as input instead of a BIT file. All of the PROMGen output options may be used, so the **-r** option can be used for splitting an existing PROM file into multiple PROM files or for converting an existing PROM file to another format.

-s (PROM Size)

```
-s <promsize1> <promsize2> ...
```

This option sets the PROM size in kilobytes. The PROM size must be a power of 2. The default value is 64 kilobytes. The **-s** option must precede any **-u**, **-d**, or **-n** options.

Multiple *<promsize>* entries for the **-s** option indicates the PROM will be split into multiple PROM files.

Note: PROMGen PROM sizes are specified in bytes. *The Programmable Logic Data Book* specifies PROM sizes in bits for Xilinx serial PROMs (see **-x** option).

-u (Load Upward)

```
-u <hexaddress0> <filename1> <filename2> ...
```

This option loads one or more BIT files from the starting address in an upward direction. When you specify several files after this option, PROMGen concatenates the files in a daisy-chain. You can load files at different addresses by specifying multiple **-u** options.

This option must be specified immediately before the input bitstream file.

-x (Specify Xilinx PROM)

```
-x <xilinx_prom1> <xilinx_prom2> ...
```

The **-x** option specifies one or more Xilinx serial PROMs for which the PROM files are targeted. Use this option instead of the **-s** option if you know the Xilinx PROMs to use.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 473 of 947

Multiple <*xilinx_prom*> entries for the **-x** option indicates the PROM will be split into multiple PROM files.

Examples

To load the file `test.bit` up from address `0x0000` in MCS format, enter the following information at the command line:

```
promgen -u 0 test
```

To daisy-chain the files `test1.bit` and `test2.bit` up from address `0x0000`, and the files `test3.bit` and `test4.bit` from address `0x4000`, while using a 32K PROM and the Motorola EXORmax format, enter the following information at the command line:

```
promgen -s 32 -p exo -u 00 test1 test2 -u 4000 test3 test4
```

To load the file `test.bit` into the PROM programmer in a downward direction starting at address `0x400`, using a Xilinx XC1718D PROM, enter the following information at the command line:

```
promgen -x xc1718d -d 0x400 test
```

To specify a PROM file name that is different from the default file name, enter the following information at the command line:

promgen [<*options*>] <*filename*> **-o** <*newfilename*>

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 474 of 947

Appendix B

XC18V00 Series PROMs

This appendix contains package specifications for the XC18V00 Series of In-System Programmable Configuration PROMs, as well as the XC18V00 Series product specification (DS026). The latest version of this information is available online (at www.xilinx.com).

PROM Package Specifications


This section contains specifications for the following Virtex-II packages:

- PC20-84 Specification
- SO20 Specification
- VQ44 Specification

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 475 of 947

PC20-84 Specification

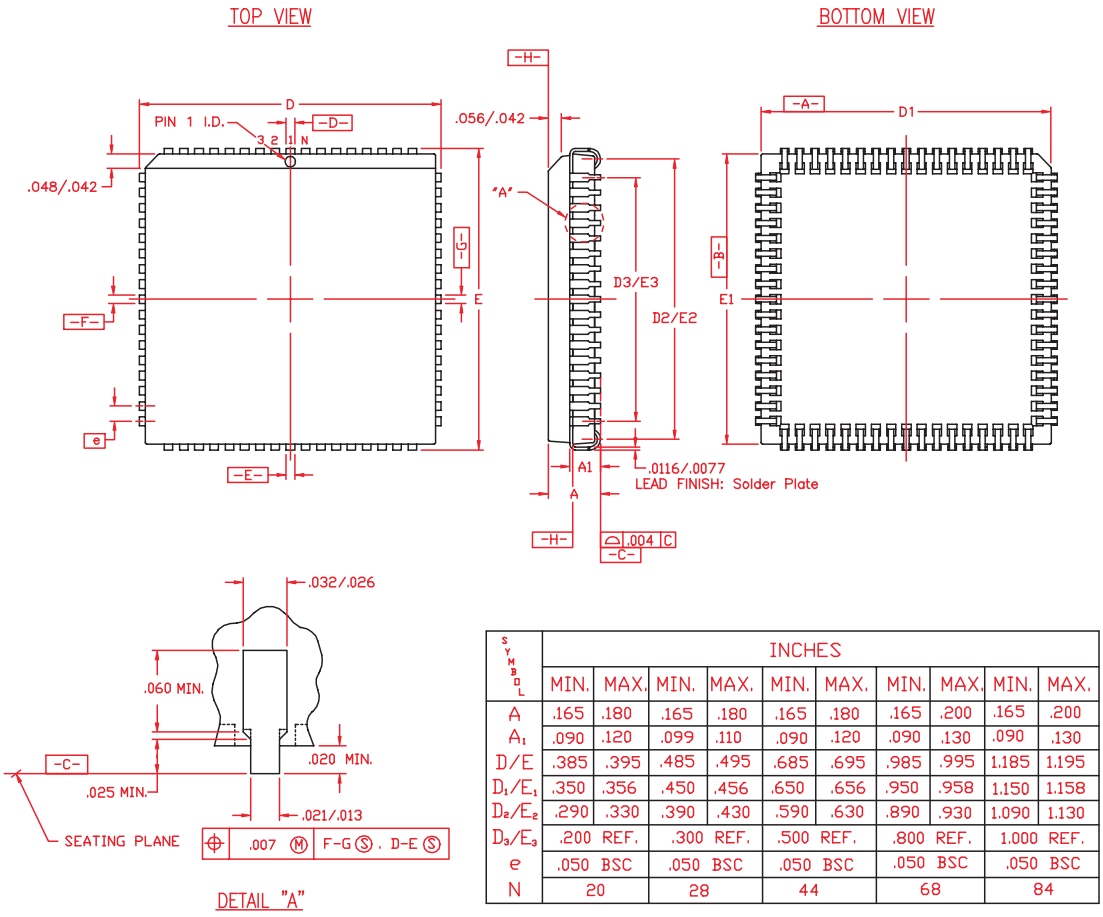

SYMBOL	INCHES									
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
A	.165	.180	.165	.180	.165	.180	.165	.200	.165	.200
A_1	.090	.120	.099	.110	.090	.120	.090	.130	.090	.130
D/E	.385	.395	.485	.495	.685	.695	.985	.995	1.185	1.195
D_1/E_1	.350	.356	.450	.456	.650	.656	.950	.958	1.150	1.158
D_2/E_2	.290	.330	.390	.430	.590	.630	.890	.930	1.090	1.130
D_3/E_3	.200 REF.		.300 REF.		.500 REF.		.800 REF.		1.000 REF.	
e	.050 BSC		.050 BSC		.050 BSC		.050 BSC		.050 BSC	
N	20		28		44		68		84	

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
2. DIMENSIONS 'D1' AND 'E1' DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 PER SIDE.
3. 'N' IS NUMBER OF TERMINALS.
4. CONFORM TO JEDEC MO-047
5. TOP OF PACKAGE MAY BE SMALLER THAN BOTTOM BY .010".

20, 28, 44, 68 and 84–PIN PLCC (PC20 THRU PC84)


UG002_app_01_111600

Figure B-1: **PC20-84 Specification**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 476 of 947

SO20 Specification

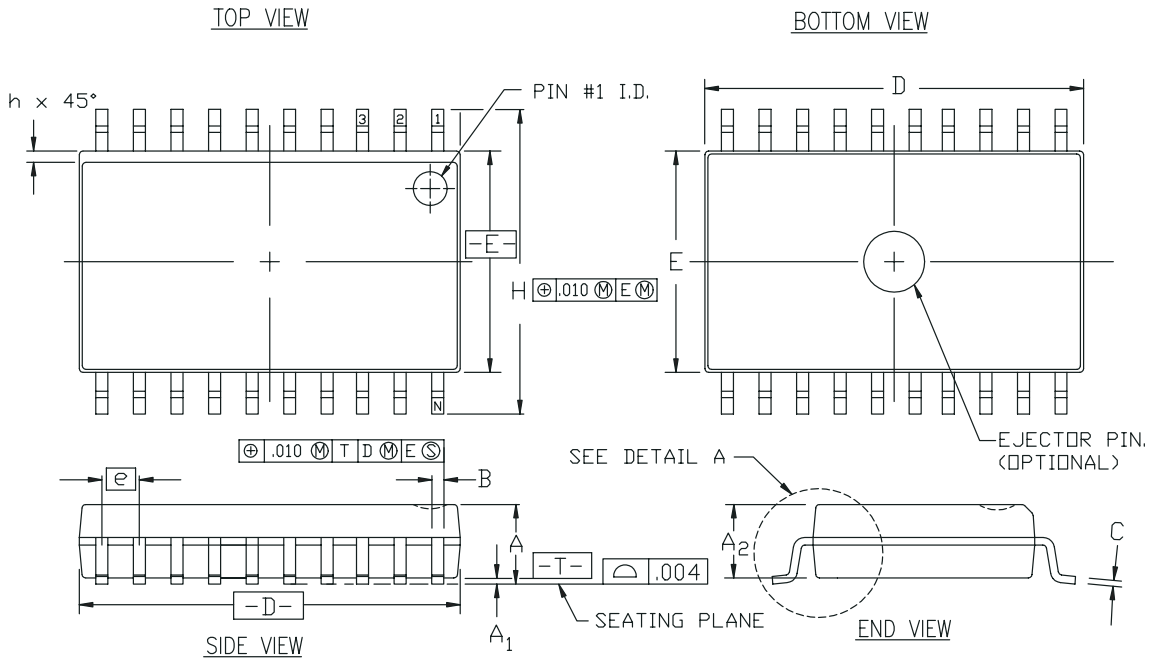

SYMBOL	INCHES		
	MIN.	NOM.	MAX.
A	.097	.101	.104
A_1	.005	.009	.0115
A_2	.090	.092	.094
B	.014	.016	.019
C	.0091	.010	.0125
D	.500	.505	.510
E	.292	.296	.299
e	.050 BSC		
H	.400	.406	.410
h	.010	--	.029
L	.024	.032	.040
α	0°	5°	8°

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
2. DIMENSION "D" DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED .006" PER SIDE.
3. DIMENSION "E" DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED .010" PER SIDE.
4. LEAD FINISH: SOLDER PLATE
5. CONFORMS TO JEDEC MS-013-AC


20 LEAD SOIC (SO20)

UG002_app_02_111600

Figure B-2: **SO20 Specification**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 477/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 477 of 947

VQ44 Specification

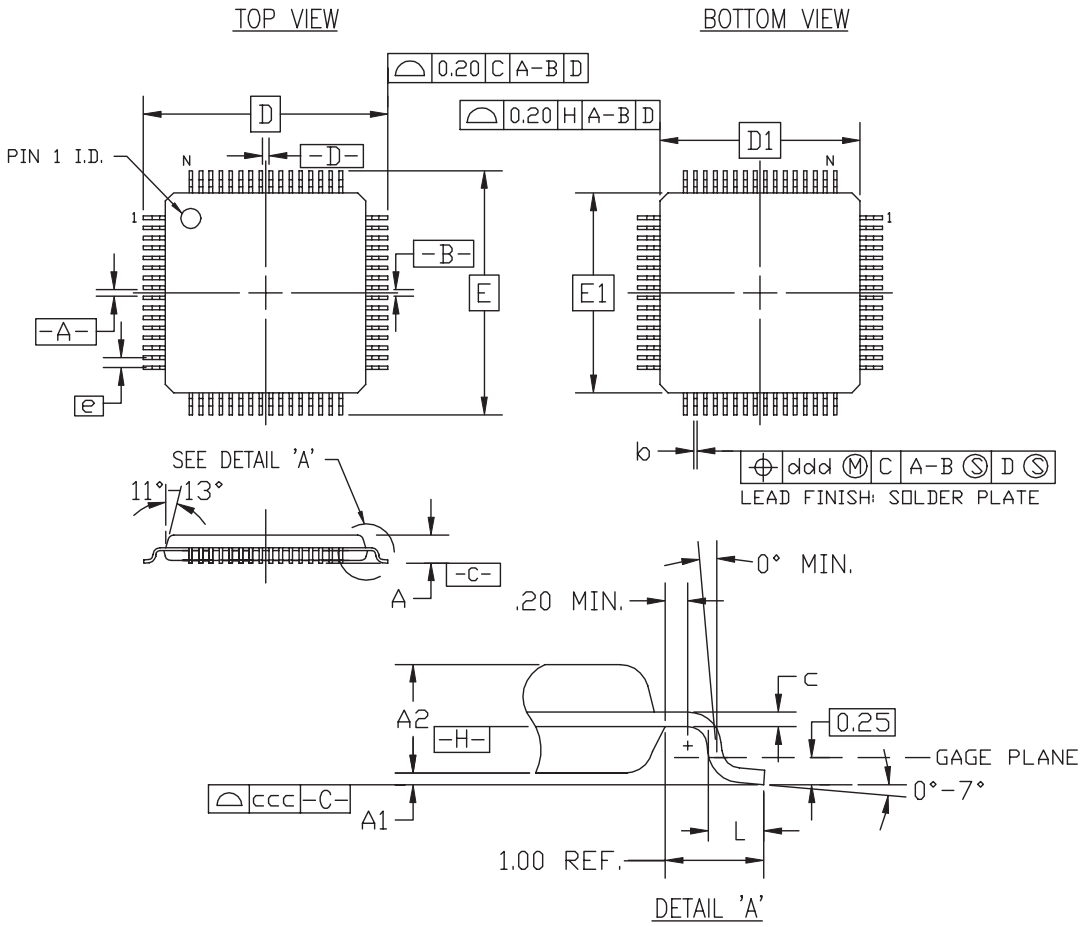

SYMBOL	VQ44 MILLIMETERS MIN.	NOM.	MAX.	VQ64 MILLIMETERS MIN.	NOM.	MAX.	VQ100 MILLIMETERS MIN.	NOM.	MAX.
A	---	---	1.20	---	---	1.20	---	---	1.20
A_1	0.05	---	0.15	0.05	0.10	0.15	0.05	0.10	0.15
A_2	0.95	1.00	1.05	0.95	1.00	1.05	0.95	1.00	1.05
D/E	12.00 BSC			12.00 BSC.			16.00 BSC.		
D_1/E_1	10.00 BSC			10.00 BSC.			14.00 BSC.		
b	0.30	0.37	0.45	0.17	0.22	0.27	0.17	0.22	0.27
c	0.09	---	0.20	0.09	---	0.20	0.09	---	0.20
e	0.80 BSC.			0.50 BSC.			0.50 BSC.		
L	0.45	0.60	0.75	0.45	0.60	0.75	0.45	0.60	0.75
ccc	---	---	0.10	---	---	0.08	---	---	0.08
ddd	---	---	0.20	---	---	0.08	---	---	0.08
N	44			64			100		
REF.	JEDEC MS-026-ACB			JEDEC MS-026-ACD			JEDEC MS-026-AED		

NOTES:
1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
2. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED 0.25mm PER SIDE.
3. THE TOP OF PACKAGE MAY BE SMALLER THAN THE BOTTOM OF PACKAGE BY 0.15mm.

44, 64, 100-PIN PLASTIC VERY THIN QFP (VQ44, VQ64, VQ100)

UG002_app_04_111600

Figure B-3: **VQ44 Specification**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 478 of 947

XC18V00 Series In-System Programmable Configuration PROMs

DS026 (v4.0) June 11, 2003

Product Specification

Features

- In-system programmable 3.3V PROMs for configuration of Xilinx FPGAs
  - Endurance of 20,000 program/erase cycles
  - Program/erase over full commercial/industrial voltage and temperature range (–40°C to +85°C)
- IEEE Std 1149.1 boundary-scan (JTAG) support
- Simple interface to the FPGA
- Cascadable for storing longer or multiple bitstreams
- Low-power advanced CMOS FLASH process
- Dual configuration modes
  - Serial Slow/Fast configuration (up to 33 MHz)
  - Parallel (up to 264 Mb/s at 33 MHz)
- 5V tolerant I/O pins accept 5V, 3.3V and 2.5V signals
- 3.3V or 2.5V output capability
- Available in PC20, SO20, PC44, and VQ44 packages
- Design support using the Xilinx Alliance and Foundation series software packages.
- JTAG command initiation of standard FPGA configuration

Description

Xilinx introduces the XC18V00 series of in-system programmable configuration PROMs (Figure 1). Devices in this 3.3V family include a 4-megabit, a 2-megabit, a 1-megabit, and a 512-kilobit PROM that provide an easy-to-use, cost-effective method for re-programming and storing Xilinx FPGA configuration bitstreams.

When the FPGA is in Master Serial mode, it generates a configuration clock that drives the PROM. A short access time after $\overline{CE}$ and OE are enabled, data is available on the PROM DATA (D0) pin that is connected to the FPGA D_{IN} pin. New data is available a short access time after each rising clock edge. The FPGA generates the appropriate number of clock pulses to complete the configuration. When the FPGA is in Slave Serial mode, the PROM and the FPGA are clocked by an external clock.

When the FPGA is in Master-SelectMAP mode, the FPGA generates a configuration clock that drives the PROM. When the FPGA is in Slave-Parallel or Slave-SelectMAP Mode, an external oscillator generates the configuration clock that drives the PROM and the FPGA. After $\overline{CE}$ and OE are enabled, data is available on the PROMs DATA (D0-D7) pins. New data is available a short access time after each rising clock edge. The data is clocked into the FPGA on the following rising edge of the CCLK. A free-running oscillator can be used in the Slave-Parallel or Slave-SelecMAP modes.

Multiple devices can be concatenated by using the $\overline{CEO}$ output to drive the $\overline{CE}$ input of the following device. The clock inputs and the DATA outputs of all PROMs in this chain are interconnected. All devices are compatible and can be cascaded with other members of the family or with the XC17V00 one-time programmable Serial PROM family.

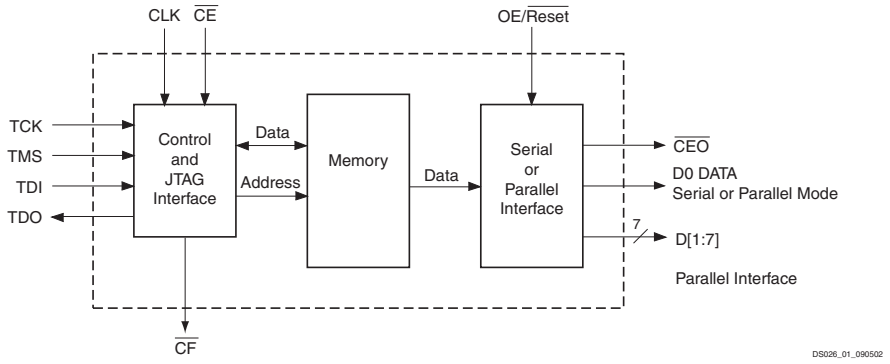


Figure 1: **XC18V00 Series Block Diagram**

©2003 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and further disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

NOTICE OF DISCLAIMER: Xilinx is providing this design, code, or information "as is." By providing the design, code, or information as one possible implementation of this feature, application, or standard, Xilinx makes no representation that this implementation is free from any claims of infringement. You are responsible for obtaining any rights you may require for your implementation. Xilinx expressly disclaims any warranty whatsoever with respect to the adequacy of the implementation, including but not limited to any warranties or representations that this implementation is free from claims of infringement and any implied warranties of merchantability or fitness for a particular purpose.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 479 of 947

Pinout and Pin Description

Table 1 provides a list of the pin names and descriptions for the 44-pin VQFP and PLCC and the 20-pin SOIC and PLCC packages.

Table 1: **Pin Names and Descriptions**

Pin Name	Boundary Scan Order	Function	Pin Description	44-pin VQFP	44-pin PLCC	20-pin SOIC & PLCC
D0	4	DATA OUT	D0 is the DATA output pin to provide data for configuring an FPGA in serial mode.	40	2	1
	3	OUTPUT ENABLE				
D1	6	DATA OUT	D0-D7 are the output pins to provide parallel data for configuring a Xilinx FPGA in Slave-Parallel/SelectMap mode. D1-D7 remain in HIGHZ state when the PROM operates in serial mode. D1-D7 can be left unconnected when the PROM is used in serial mode.	29	35	16
	5	OUTPUT ENABLE				
D2	2	DATA OUT		42	4	2
	1	OUTPUT ENABLE				
D3	8	DATA OUT		27	33	15
	7	OUTPUT ENABLE				
D4	24	DATA OUT		9	15	7(1)
	23	OUTPUT ENABLE				
D5	10	DATA OUT		25	31	14
	9	OUTPUT ENABLE				
D6	17	DATA OUT		14	20	9
	16	OUTPUT ENABLE				
D7	14	DATA OUT		19	25	12
	13	OUTPUT ENABLE				
CLK	0	DATA IN	Each rising edge on the CLK input increments the internal address counter if both $\overline{CE}$ is Low and OE/$\overline{RESET}$ is High.	43	5	3
OE/$\overline{RESET}$	20	DATA IN	When Low, this input holds the address counter reset and the DATA output is in a high-impedance state. This is a bidirectional open-drain pin that is held Low while the PROM is reset. Polarity is NOT programmable.	13	19	8
	19	DATA OUT				
	18	OUTPUT ENABLE				
$\overline{CE}$	15	DATA IN	When $\overline{CE}$ is High, the device is put into low-power standby mode, the address counter is reset, and the DATA pins are put in a high-impedance state.	15	21	10

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 480 of 947

Table 1: **Pin Names and Descriptions *(Continued)***


Pin Name	Boundary Scan Order	Function	Pin Description	44-pin VQFP	44-pin PLCC	20-pin SOIC & PLCC
$\overline{CF}$	22	DATA OUT	Allows JTAG CONFIG instruction to initiate FPGA configuration without powering down FPGA. This is an open-drain output that is pulsed Low by the JTAG CONFIG command.	10	16	7(1)
	21	OUTPUT ENABLE				
$\overline{CEO}$	12	DATA OUT	Chip Enable Output ($\overline{CEO}$) is connected to the $\overline{CE}$ input of the next PROM in the chain. This output is Low when $\overline{CE}$ is Low and OE/$\overline{RESET}$ input is High, AND the internal address counter has been incremented beyond its Terminal Count (TC) value. $\overline{CEO}$ returns to High when OE/$\overline{RESET}$ goes Low or $\overline{CE}$ goes High.	21	27	13
	11	OUTPUT ENABLE				
GND			GND is the ground connection.	6, 18, 28 & 41	3, 12, 24 & 34	11
TMS		MODE SELECT	The state of TMS on the rising edge of TCK determines the state transitions at the Test Access Port (TAP) controller. TMS has an internal 50K ohm resistive pull-up on it to provide a logic "1" to the device if the pin is not driven.	5	11	5
TCK		CLOCK	This pin is the JTAG test clock. It sequences the TAP controller and all the JTAG test and programming electronics.	7	13	6
TDI		DATA IN	This pin is the serial input to all JTAG instruction and data registers. TDI has an internal 50K ohm resistive pull-up on it to provide a logic "1" to the system if the pin is not driven.	3	9	4
TDO		DATA OUT	This pin is the serial output for all JTAG instruction and data registers. TDO has an internal 50K ohm resistive pull-up on it to provide a logic "1" to the system if the pin is not driven.	31	37	17
V_{CCINT}			Positive 3.3V supply voltage for internal logic.	17, 35 & 38(3)	23, 41 & 44(3)	18 & 20(3)
V_{CCO}			Positive 3.3V or 2.5V supply voltage connected to the input buffers(2) and output voltage drivers.	8, 16, 26 & 36	14, 22, 32 & 42	19
NC			No connects.	1, 2, 4, 11, 12, 20, 22, 23, 24, 30, 32, 33, 34, 37, 39, 44	1, 6, 7, 8, 10, 17, 18, 26, 28, 29, 30, 36, 38, 39, 40, 43	


Notes:
1. By default, pin 7 is the D4 pin in the 20-pin packages. However, CF --> D4 programming option can be set to override the default and route the CF function to pin 7 in the Serial mode.
2. For devices with IDCODES 0502x093h, the input buffers are supplied by V_{CCINT}.
3. For devices with IDCODES, 0503x093h, these V_{CCINT} pins are no connects: pin 38 in 44-pin VQFP package, pin 44 in 44-pin PLCC package and pin 20 in 20-pin SOIC and20-pin PLCC packages.


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 481/9


Ex. 1012
CISCO SYSTEMS, INC. / Page 481 of 947

Pinout Diagrams

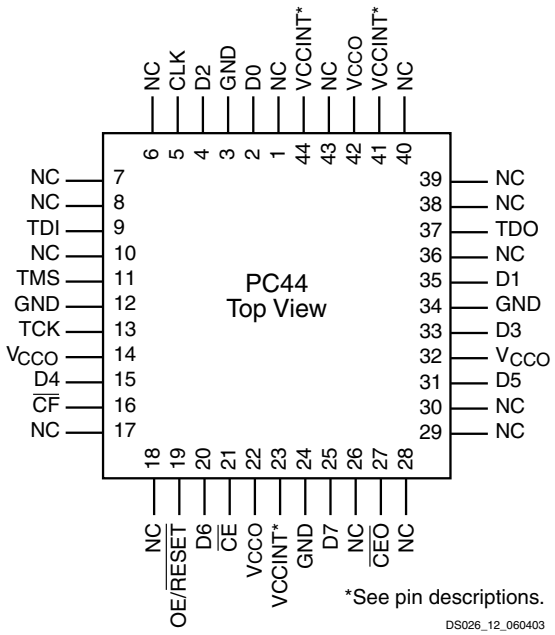

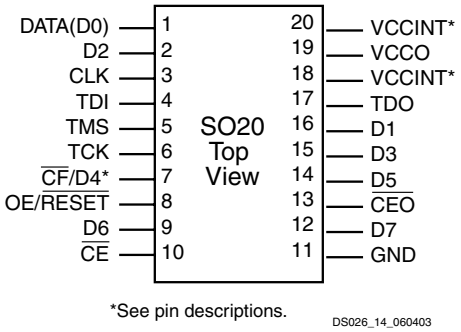

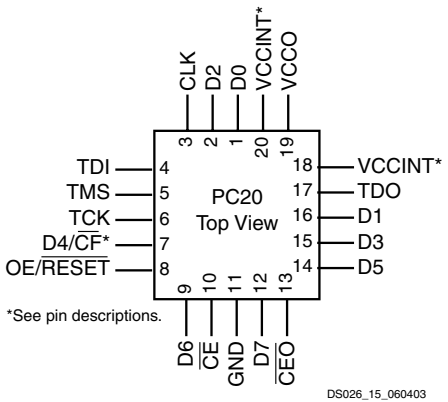

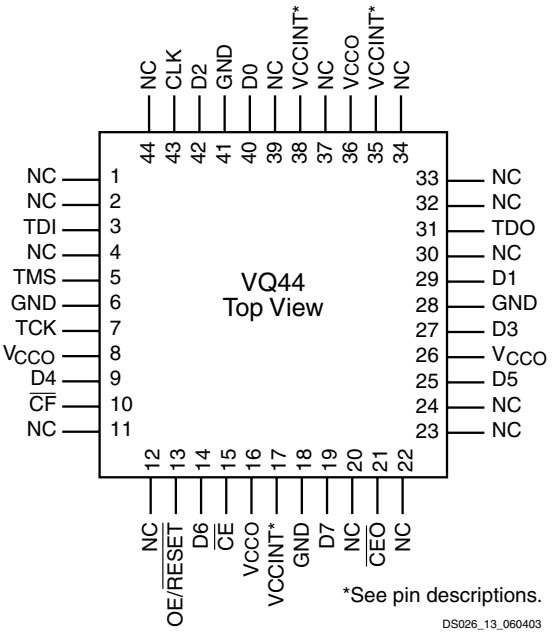

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 482 of 947

Xilinx FPGAs and Compatible PROMs

Table 2 provides a list of Xilinx FPGAs and compatible PROMs.

Table 2: **Xilinx FPGAs and Compatible PROMs**

Device	Configuration Bits	XC18V00 Solution
XC2VP2	1,305,440	XC18V02
XC2VP4	3,006,560	XC18V04
XC2VP7	4,485,472	XC18V04 + XC18V512
XC2VP20	8,214,624	2 of XC18V04
XC2VP30	11,364,608	3 of XC18V04
XC2VP40	15,563,264	4 of XC18V04
XC2VP50	19,021,472	5 of XC18V04
XC2VP70	25,604,096	6 of XC18V04 + XC18V512
XC2VP100	33,645,312	8 of XC18V04 + XC18V512
XC2VP125	42,782,208	10 of XC18V04 + XC18V01
XC2V40	360,096	XC18V512
XC2V80	635,296	XC18V01
XC2V250	1,697,184	XC18V02
XC2V500	2,761,888	XC18V04
XC2V1000	4,082,592	XC18V04
XC2V1500	5,659,296	XC18V04 + XC18V02
XC2V2000	7,492,000	2 of XC18V04
XC2V3000	10,494,368	3 of XC18V04
XC2V4000	15,659,936	4 of XC18V04
XC2V6000	21,849,504	5 of XC18V04 + XC18V02
XC2V8000	29,063,072	7 of XC18V04
XCV50	559,200	XC18V01
XCV100	781,216	XC18V01
XCV150	1,040,096	XC18V01
XCV200	1,335,840	XC18V02
XCV300	1,751,808	XC18V02
XCV400	2,546,048	XC18V04
XCV600	3,607,968	XC18V04
XCV800	4,715,616	XC18V04 + XC18V512
XCV1000	6,127,744	XC18V04 + XC18V02
XCV50E	630,048	XC18V01
XCV100E	863,840	XC18V01
XCV200E	1,442,016	XC18V02
XCV300E	1,875,648	XC18V02
XCV400E	2,693,440	XC18V04
XCV405E	3,430,400	XC18V04
XCV600E	3,961,632	XC18V04
XCV812E	6,519,648	2 of XC18V04
XCV1000E	6,587,520	2 of XC18V04
XCV1600E	8,308,992	2 of XC18V04
XCV2000E	10,159,648	3 of XC18V04
XCV2600E	12,922,336	4 of XC18V04
XCV3200E	16,283,712	4 of XC18V04
XC2S15	197,696	XC18V512
XC2S30	336,768	XC18V512
XC2S50	559,200	XC18V01
XC2S100	781,216	XC18V01
XC2S150	1,040,096	XC18V01
XC2S200	1,335,840	XC18V02
XC2S50E	630,048	XC18V01
XC2S100E	863,840	XC18V01
XC2S150E	1,134,496	XC18V02
XC2S200E	1,442,016	XC18V02
XC2S300E	1,875,648	XC18V02
XC2S400E	2,693,440	XC18V04
XC2S600E	3,961,632	XC18V04
XC3S50	439,264	XC18V512
XC3S200	1,047,616	XC18V01
XC3S400	1,699,136	XC18V02
XC3S1000	3,223,488	XC18V04

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 483/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 483 of 947

Table 2: **Xilinx FPGAs and Compatible PROMs**

Device	Configuration Bits	XC18V00 Solution
XC3S1500	5,214,784	XC18V04 + XC18V01
XC3S2000	7,673,024	2 of XC18V04
XC3S4000	11,316,864	3 of XC18V04
XC3S5000	13,271,936	3 of XC18V04 + XC18V01

Capacity

Devices	Configuration Bits
XC18V04	4,194,304
XC18V02	2,097,152
XC18V01	1,048,576
XC18V512	524,288

In-System Programming

In-System Programmable PROMs can be programmed individually, or two or more can be daisy-chained together and programmed in-system via the standard 4-pin JTAG protocol as shown in Figure 2. In-system programming offers quick and efficient design iterations and eliminates unnecessary package handling or socketing of devices. The Xilinx development system provides the programming data sequence using either Xilinx iMPACT software and a download cable, a third-party JTAG development system, a JTAG-compatible board tester, or a simple microprocessor interface that emulates the JTAG instruction sequence. The iMPACT software also outputs serial vector format (SVF) files for use with any tools that accept SVF format and with automatic test equipment.

All outputs are held in a high-impedance state or held at clamp levels during in-system programming.

OE/$\overline{\text{RESET}}$

The ISP programming algorithm requires issuance of a reset that causes OE to go Low.

External Programming

Xilinx reprogrammable PROMs can also be programmed by the Xilinx HW-130, Xilinx MultiPRO, or a third-party device programmer. This provides the added flexibility of using pre-programmed devices with an in-system programmable option for future enhancements and design changes.

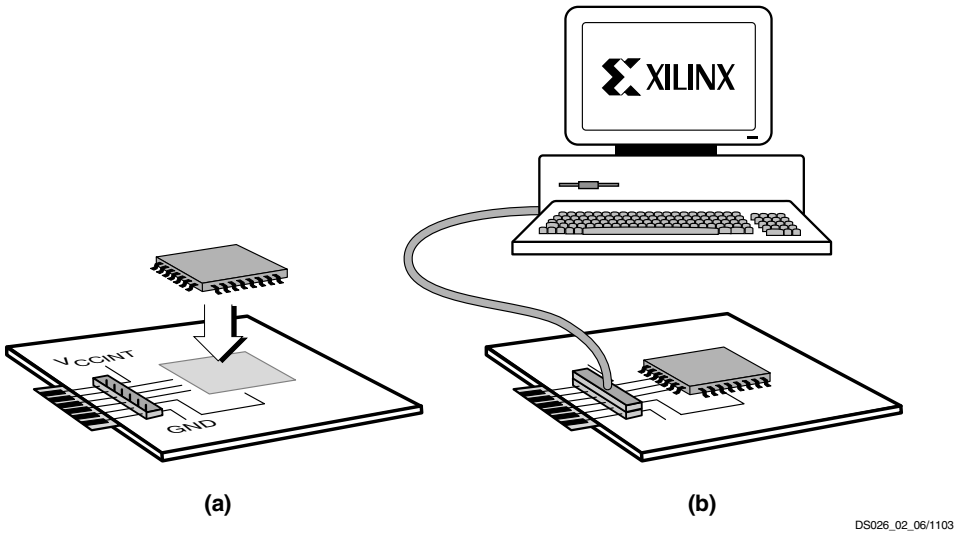


Figure 2: **In-System Programming Operation (a) Solder Device to PCB and (b) Program Using Download Cable**

Reliability and Endurance

Xilinx in-system programmable products provide a guaranteed endurance level of 20,000 in-system program/erase cycles and a minimum data retention of 20 years. Each device meets all functional, performance, and data retention specifications within this endurance limit.

Design Security

The Xilinx in-system programmable PROM devices incorporate advanced data security features to fully protect the programming data against unauthorized reading via JTAG. Table 3 shows the security setting available.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 484 of 947

The read security bit can be set by the user to prevent the internal programming pattern from being read or copied via JTAG. When set, it allows device erase. Erasing the entire device is the only way to reset the read security bit.

Table 3: **Data Security Options**

Default = Reset	Set
Read Allowed Program/Erase Allowed Verify Allowed	Read Inhibited via JTAG Program/Erase Allowed Verify Inhibited

IEEE 1149.1 Boundary-Scan (JTAG)

The XC18V00 family is fully compliant with the IEEE Std. 1149.1 Boundary-Scan, also known as JTAG. A Test Access Port (TAP) and registers are provided to support all required boundary scan instructions, as well as many of the optional instructions specified by IEEE Std. 1149.1. In addition, the JTAG interface is used to implement in-system programming (ISP) to facilitate configuration, erasure, and verification operations on the XC18V00 device.

Table 4 lists the required and optional boundary-scan instructions supported in the XC18V00. Refer to the IEEE Std. 1149.1 specification for a complete description of boundary-scan architecture and the required and optional instructions.

Table 4: **Boundary Scan Instructions**

Boundary-Scan Command	Binary Code [7:0]	Description
Required Instructions		
BYPASS	11111111	Enables BYPASS
SAMPLE/ PRELOAD	00000001	Enables boundary-scan SAMPLE/PRELOAD operation
EXTEST	00000000	Enables boundary-scan EXTEST operation
Optional Instructions		
CLAMP	11111010	Enables boundary-scan CLAMP operation
HIGHZ	11111100	all outputs in high-impedance state simultaneously
IDCODE	11111110	Enables shifting out 32-bit IDCODE
USERCODE	11111101	Enables shifting out 32-bit USERCODE
XC18V00 Specific Instructions		
CONFIG	11101110	Initiates FPGA configuration by pulsing $\overline{CF}$ pin Low once

Instruction Register

The Instruction Register (IR) for the XC18V00 is eight bits wide and is connected between TDI and TDO during an instruction scan sequence. In preparation for an instruction scan sequence, the instruction register is parallel loaded with a fixed instruction capture pattern. This pattern is shifted out onto TDO (LSB first), while an instruction is shifted into the instruction register from TDI. The detailed composition of the instruction capture pattern is illustrated in Figure 3.

The ISP Status field, IR(4), contains logic "1" if the device is currently in ISP mode; otherwise, it contains logic "0". The Security field, IR(3), contains logic "1" if the device has been programmed with the security option turned on; otherwise, it contains logic "0".

	IR[7:5]	IR[4]	IR[3]	IR[2]	IR[1:0]	
TDI->	0 0 0	ISP Status	Security	0	0 1	->TDO

Notes:
1. IR(1:0) = 01 is specified by IEEE Std. 1149.1

Figure 3: **Instruction Register Values Loaded into IR as Part of an Instruction Scan Sequence**

Boundary Scan Register

The boundary-scan register is used to control and observe the state of the device pins during the EXTEST, SAMPLE/PRELOAD, and CLAMP instructions. Each output pin on the XC18V00 has two register stages that contribute to the boundary-scan register, while each input pin only has one register stage.

For each output pin, the register stage nearest to TDI controls and observes the output state, and the second stage closest to TDO controls and observes the High-Z enable state of the pin.

For each input pin, the register stage controls and observes the input state of the pin.

Identification Registers

The IDCODE is a fixed, vendor-assigned value that is used to electrically identify the manufacturer and type of the device being addressed. The IDCODE register is 32 bits wide. The IDCODE register can be shifted out for examination by using the IDCODE instruction. The IDCODE is available to any other system component via JTAG.

The IDCODE register has the following binary format:

```
vvvv:ffff:ffff:aaaa:aaaa:cccc:cccc:ccc1
```

where

v = the die version number

f = the family code (50h for XC18V00 family)

a = the ISP PROM product ID (36h for the XC18V04)

c = the company code (49h for Xilinx)

Note: The LSB of the IDCODE register is always read as logic "1" as defined by IEEE Std. 1149.1.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 485 of 947

Table 5 lists the IDCODE register values for the XC18V00 devices.

Table 5: **IDCODES Assigned to XC18V00 Devices**

ISP-PROM	IDCODE
XC18V01	05024093h or 05034093h
XC18V02	05025093h or 05035093h
XC18V04	05026093h or 05036093h
XC18V512	05023093h or 05033093h

The USERCODE instruction gives access to a 32-bit user programmable scratch pad typically used to supply information about the device's programmed contents. By using the USERCODE instruction, a user-programmable identification code can be shifted out for examination. This code is loaded into the USERCODE register during programming of the XC18V00 device. If the device is blank or was not loaded during programming, the USERCODE register contains FFFFFFFFh.

XC18V00 TAP Characteristics

The XC18V00 family performs both in-system programming and IEEE 1149.1 boundary-scan (JTAG) testing via a single 4-wire Test Access Port (TAP). This simplifies system designs and allows standard Automatic Test Equipment to perform both functions. The AC characteristics of the XC18V00 TAP are described as follows.

TAP Timing

Figure 4 shows the timing relationships of the TAP signals. These TAP timing characteristics are identical for both boundary-scan and ISP operations.

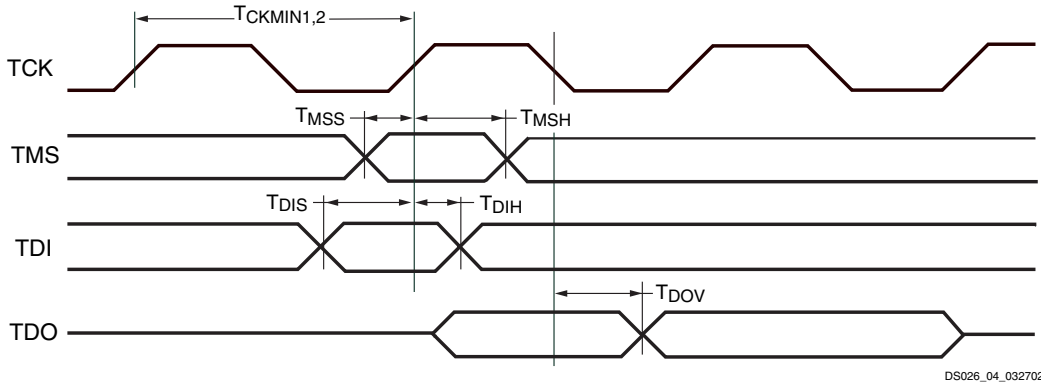


Figure 4: **Test Access Port Timing**

TAP AC Parameters

Table 6 shows the timing parameters for the TAP waveforms shown in Figure 4.

Table 6: **Test Access Port Timing Parameters**

Symbol	Parameter	Min	Max	Units
T_{CKMIN1}	TCK minimum clock period	100	-	ns
T_{CKMIN2}	TCK minimum clock period, Bypass Mode	50	-	ns
T_{MSS}	TMS setup time	10	-	ns
T_{MSH}	TMS hold time	25	-	ns
T_{DIS}	TDI setup time	10	-	ns
T_{DIH}	TDI hold time	25	-	ns
T_{DOV}	TDO valid delay	-	25	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 486 of 947

Connecting Configuration PROMs

Connecting the FPGA device with the configuration PROM (see Figure 5 and Figure 6).

- The DATA output(s) of the PROM(s) drives the D_{IN} input of the lead FPGA device.
- The Master FPGA CCLK output drives the CLK input(s) of the PROM(s) (in Master-Serial and Master-SelectMAP modes only).
- The $\overline{CEO}$ output of a PROM drives the $\overline{CE}$ input of the next PROM in a daisy chain (if any).
- The OE/$\overline{RESET}$ pins of all PROMs are connected to the $\overline{INIT}$ pins of all FPGA devices. This connection assures that the PROM address counter is reset before the start of any (re)configuration, even when a reconfiguration is initiated by a V_{CCINT} glitch.
- The PROM $\overline{CE}$ input can be driven from the DONE pin. The $\overline{CE}$ input of the first (or only) PROM can be driven by the DONE output of all target FPGA devices, provided that DONE is not permanently grounded. $\overline{CE}$ can also be permanently tied Low, but this keeps the DATA output active and causes an unnecessary supply current of 10 mA maximum.
- Slave-Parallel/SelectMap mode is similar to slave serial mode. The DATA is clocked out of the PROM one byte per CCLK instead of one bit per CCLK cycle. See FPGA data sheets for special configuration requirements.

Initiating FPGA Configuration

The XC18V00 devices incorporate a pin named $\overline{CF}$ that is controllable through the JTAG CONFIG instruction. Executing the CONFIG instruction through JTAG pulses the $\overline{CF}$ low once for 300-500 ns, which resets the FPGA and initiates configuration.

The $\overline{CF}$ pin must be connected to the $\overline{PROGRAM}$ pin on the FPGA(s) to use this feature.

The iMPACT software can also issue a JTAG CONFIG command to initiate FPGA configuration through the “Load FPGA” setting.

The 20-pin packages do not have a dedicated $\overline{CF}$ pin. For 20-pin packages, the CF --> D4 setting can be used to route the $\overline{CF}$ pin function to pin 7 only if the parallel output mode is *not* used.

Selecting Configuration Modes

The XC18V00 accommodates serial and parallel methods of configuration. The configuration modes are selectable through a user control register in the XC18V00 device. This control register is accessible through JTAG, and is set using the “Parallel mode” setting on the Xilinx iMPACT software. Serial output is the default configuration mode.

Master Serial Mode Summary

The I/O and logic functions of the Configurable Logic Block (CLB) and their associated interconnections are established by a configuration program. The program is loaded either automatically upon power up, or on command, depending on the state of the three FPGA mode pins. In Master Serial mode, the FPGA automatically loads the configuration program from an external memory. Xilinx PROMs are designed to accommodate the Master Serial mode.

Upon power-up or reconfiguration, an FPGA enters the Master Serial mode whenever all three of the FPGA mode-select pins are Low (M0=0, M1=0, M2=0). Data is read from the PROM sequentially on a single data line. Synchronization is provided by the rising edge of the temporary signal CCLK, which is generated by the FPGA during configuration.

Master Serial Mode provides a simple configuration interface. Only a serial data line, a clock line, and two control lines are required to configure an FPGA. Data from the PROM is read sequentially, accessed via the internal address and bit counters which are incremented on every valid rising edge of CCLK. If the user-programmable, dual-function D_{IN} pin on the FPGA is used only for configuration, it must still be held at a defined level during normal operation. The Xilinx FPGA families take care of this automatically with an on-chip pull-up resistor.

Cascading Configuration PROMs

For multiple FPGAs configured as a serial daisy-chain, or a single FPGA requiring larger configuration memories in a serial or SelectMAP configuration mode, cascaded PROMs provide additional memory (Figure 5). Multiple XC18V00 devices can be concatenated by using the $\overline{CEO}$ output to drive the $\overline{CE}$ input of the downstream device. The clock inputs and the data outputs of all XC18V00 devices in the chain are interconnected. After the last data from the first PROM is read, the next clock signal to the PROM asserts its $\overline{CEO}$ output Low and drives its DATA line to a high-impedance state. The second PROM recognizes the Low level on its $\overline{CE}$ input and enables its DATA output. See Figure 7.

After configuration is complete, address counters of all cascaded PROMs are reset if the PROM OE/$\overline{RESET}$ pin goes Low or $\overline{CE}$ goes High.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 487 of 947

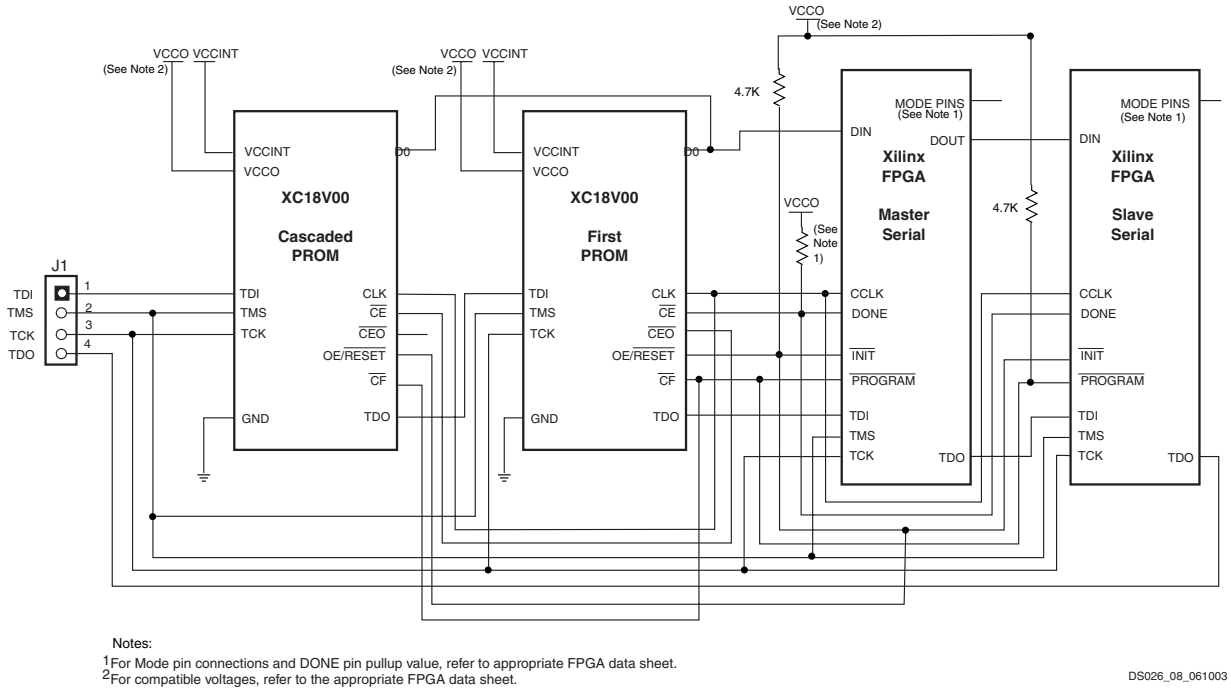


Figure 5: **Configuring Multiple Devices in Master/Slave Serial Mode**

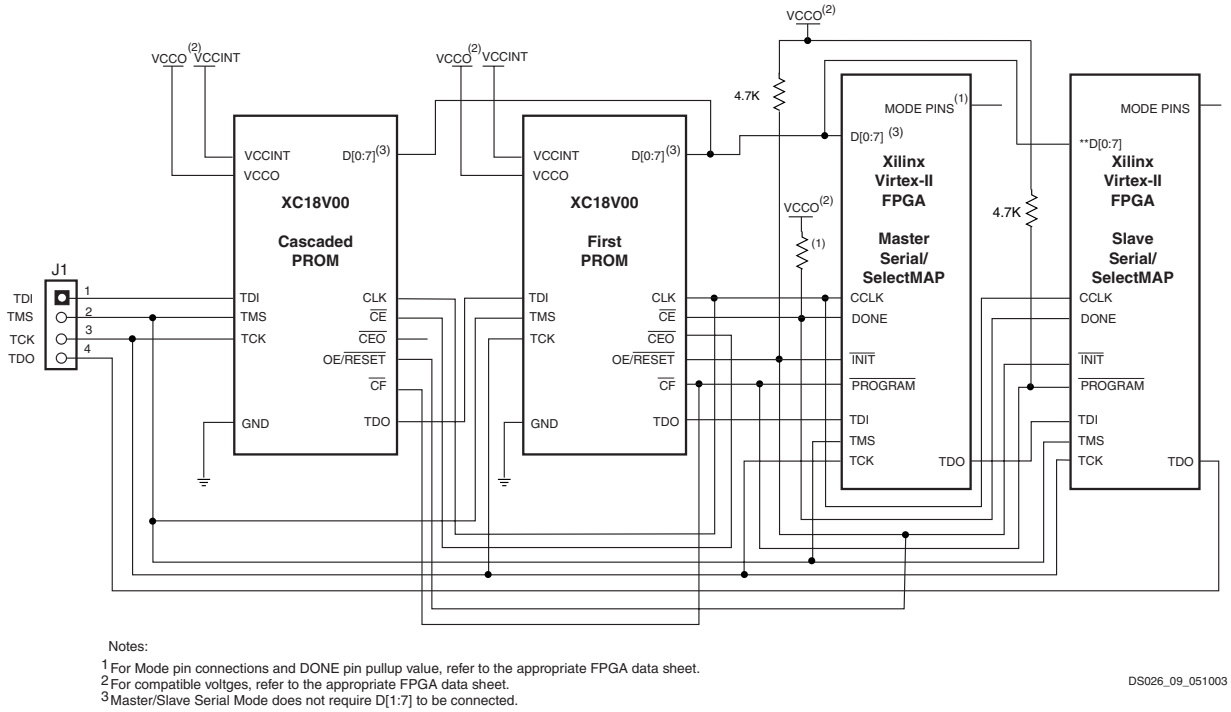


Figure 6: **Configuring Multiple Virtex-II Devices with Identical Patterns in Master/Slave or Serial/SelectMAP Modes**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 488 of 947

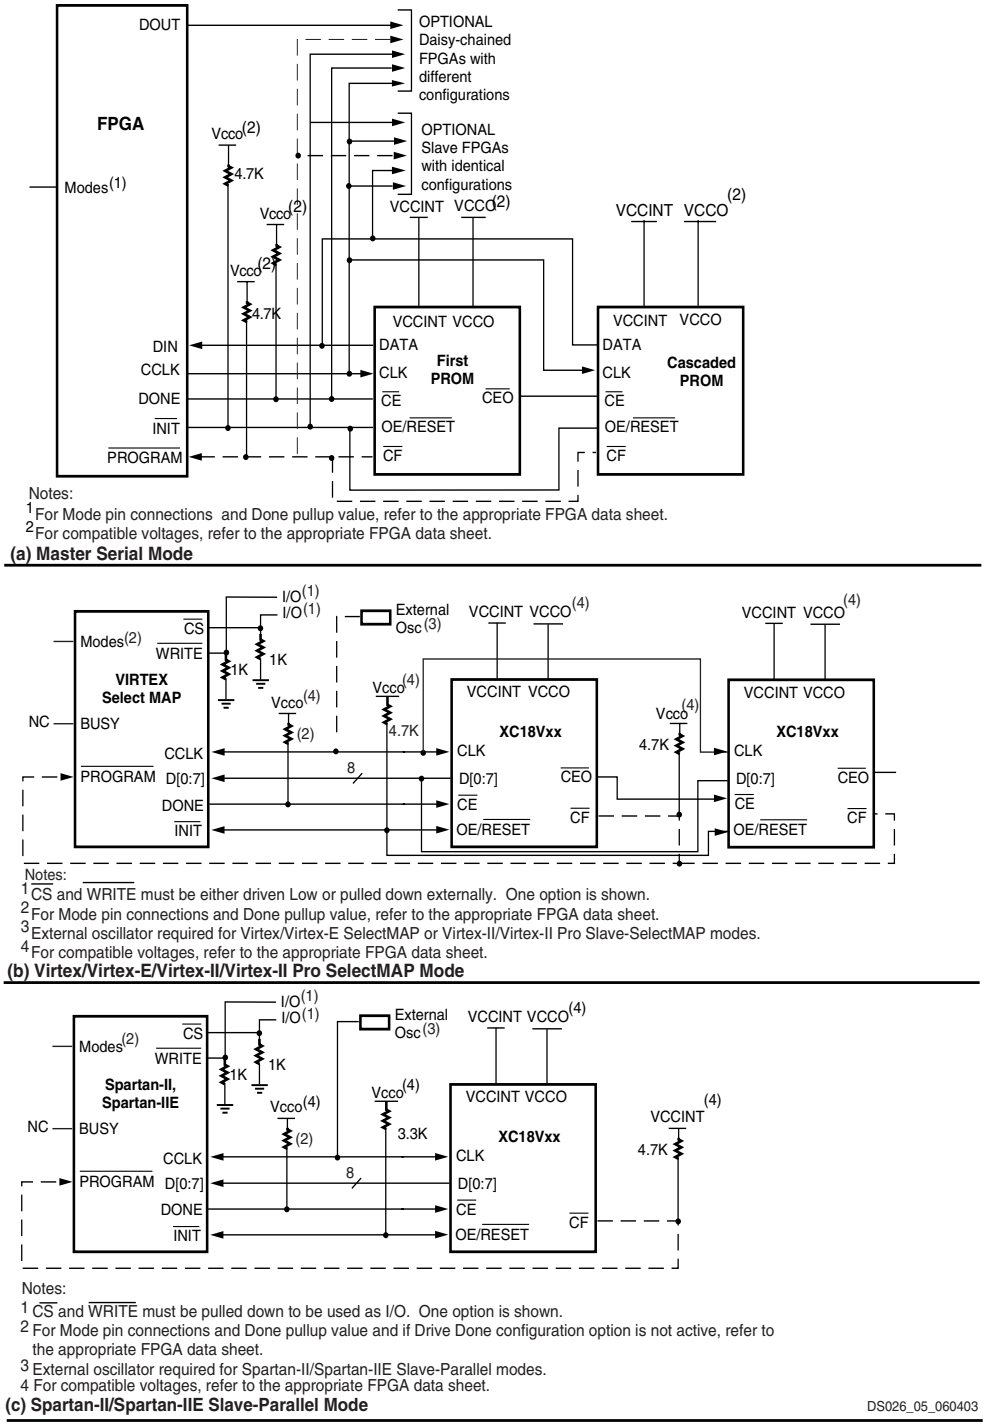


Figure 7: **(a) Master Serial Mode (b) Virtex/Virtex-E/Virtex-II Pro SelectMAP Mode (c) Spartan-II/Spartan-IIE Slave-Parallel Mode (dotted lines indicate optional connection)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 489 of 947

Reset Activation

On power up, OE/$\overline{\text{RESET}}$ is held low until the XC18V00 is active (1 ms). OE/$\overline{\text{RESET}}$ is connected to an external resistor to pull OE/$\overline{\text{RESET}}$ HIGH releasing the FPGA $\overline{\text{INIT}}$ and allowing configuration to begin. If the power drops below 2.0V, the PROM resets. OE/$\overline{\text{RESET}}$ polarity is *not* programmable. See Figure 8 for power-up requirements.

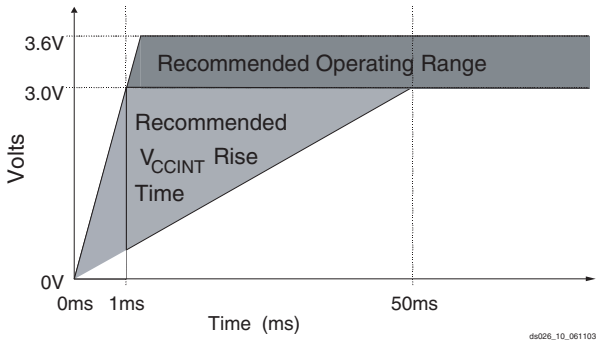


Figure 8: **V_{CCINT} Power-Up Requirements**

Standby Mode

The PROM enters a low-power standby mode whenever $\overline{\text{CE}}$ is asserted High. The address is reset. The output remains in a high-impedance state regardless of the state of the OE input. JTAG pins TMS, TDI and TDO can be in a high-impedance state or High. See Table 7.

5V Tolerant I/Os

The I/Os on each re-programmable PROM are fully 5V tolerant even through the core power supply is 3.3V. This allows 5V CMOS signals to connect directly to the PROM inputs without damage. In addition, the 3.3V V_{CCINT} power supply can be applied before or after 5V signals are applied to the I/Os. In mixed 5V/3.3V/2.5V systems, the user pins, the core power supply (V_{CCINT}), and the output power supply (V_{CCO}) can have power applied in any order. This makes the PROM devices immune to power supply sequencing issues.

Customer Control Bits

The XC18V00 PROMs have various control bits accessible by the customer. These can be set after the array has been programmed using “Skip User Array” in Xilinx iMPACT software. The iMPACT software can set these bits to enable the optional JTAG read security, parallel configuration mode, or CF-->D4 pin function. See Table 7.

Table 7: **Truth Table for PROM Control Inputs**

Control Inputs		Internal Address	Outputs		
OE/RESET	CE		DATA	CEO	I_{CC}
High	Low	If address ≤ TC(1): increment If address > TC(1): don’t change	Active High-Z	High Low	Active Reduced
Low	Low	Held reset	High-Z	High	Active
High	High	Held reset	High-Z	High	Standby
Low	High	Held reset	High-Z	High	Standby

Notes:
1. TC = Terminal Count = highest address value. TC + 1 = address 0.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 490 of 947

Absolute Maximum Ratings(1,2)

Symbol	Description	Value	Units
V_{CCINT}/V_{CCO}	Supply voltage relative to GND	–0.5 to +4.0	V
V_{IN}	Input voltage with respect to GND	–0.5 to +5.5	V
V_{TS}	Voltage applied to High-Z output	–0.5 to +5.5	V
T_{STG}	Storage temperature (ambient)	–65 to +150	°C
T_{SOL}	Maximum soldering temperature (10s @ 1/16 in.)	+220	°C
T_J	Junction temperature	+125	°C

Notes:
1. Maximum DC undershoot below GND must be limited to either 0.5V or 10 mA, whichever is easier to achieve. During transitions, the device pins can undershoot to –2.0V or overshoot to +7.0V, provided this over- or undershoot lasts less then 10 ns and with the forcing current being limited to 200 mA.
2. Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Units
V_{CCINT}	Internal voltage supply	3.0	3.6	V
V_{CCO}	Supply voltage for output drivers for 3.3V operation	3.0	3.6	V
	Supply voltage for output drivers for 2.5V operation	2.3	2.7	V
V_{IL}	Low-level input voltage	0	0.8	V
V_{IH}	High-level input voltage	2.0	5.5	V
V_O	Output voltage	0	V_{CCO}	V
T_{VCC}	V_{CCINT} rise time from 0V to nominal voltage(1)	1	50	ms
T_A	Operating ambient temperature	–40°	85°	C

Notes:
1. At power up, the device requires the V_{CCINT} power supply to monotonically rise from 0V to nominal voltage within the specified V_{CCINT} rise time. If the power supply cannot meet this requirement, then the device might not perform power-on-reset properly. See Figure 8.

Quality and Reliability Characteristics

Symbol	Description	Min	Max	Units
T_{DR}	Data retention	20	-	Years
N_{PE}	Program/erase cycles (Endurance)	20,000	-	Cycles
V_{ESD}	Electrostatic discharge (ESD)	2,000	-	Volts

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 491/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 491 of 947

DC Characteristics Over Operating Conditions


Symbol	Parameter	Test Conditions	Min	Max	Units
V_{OH}	High-level output voltage for 3.3V outputs	I_{OH} = –4 mA	2.4	-	V
	High-level output voltage for 2.5V outputs	I_{OH} = –500 µA	90% V_{CCO}	-	V
V_{OL}	Low-level output voltage for 3.3V outputs	I_{OL} = 8 mA	-	0.4	V
	Low-level output voltage for 2.5V outputs	I_{OL} = 500 µA	-	0.4	V
I_{CC}	Supply current, active mode	25 MHz	-	25	mA
I_{CCS}	Supply current, standby mode		-	10	mA
I_{ILJ}	JTAG pins TMS, TDI, and TDO pull-up current	V_{CCINT} = MAX V_{IN} = GND	-	100	µA
I_{IL}	Input leakage current	V_{CCINT} = Max V_{IN} = GND or V_{CCINT}	–10	10	µA
I_{IH}	Input and output High-Z leakage current	V_{CCINT} = Max V_{IN} = GND or V_{CCINT}	–10	10	µA
C_{IN}	Input capacitance	V_{IN} = GND f = 1.0 MHz	-	8	pF
C_{OUT}	Output capacitance	V_{OUT} = GND f = 1.0 MHz	-	14	pF

Notes:
1. Internal pull-up resistors guarantee valid logic levels at unconnected input pins. These pull-up resistors do not guarantee valid logic levels when input pins are connected to other circuits.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 492 of 947

AC Characteristics Over Operating Conditions for XC18V04 and XC18V02

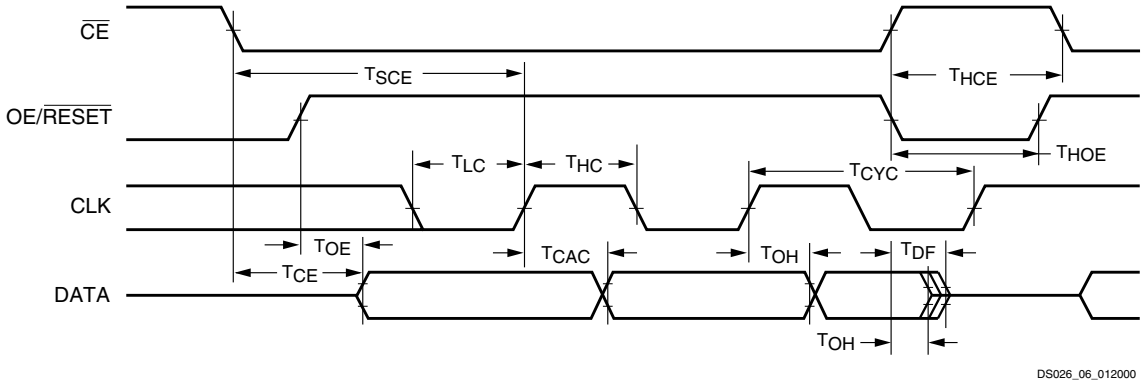


Symbol	Description	Min	Max	Units
T_{OE}	OE/$\overline{RESET}$ to data delay	-	10	ns
T_{CE}	$\overline{CE}$ to data delay	-	20	ns
T_{CAC}	CLK to data delay	-	20	ns
T_{OH}	Data hold from $\overline{CE}$, OE/$\overline{RESET}$, or CLK	0	-	ns
T_{DF}	$\overline{CE}$ or OE/$\overline{RESET}$ to data float delay(2)	-	25	ns
T_{CYC}	Clock periods	50	-	ns
T_{LC}	CLK Low time(3)	10	-	ns
T_{HC}	CLK High time(3)	10	-	ns
T_{SCE}	$\overline{CE}$ setup time to CLK (guarantees proper counting)(3)	25	-	ns
T_{HCE}	$\overline{CE}$ High time (guarantees counters are reset)	250	-	ns
T_{HOE}	OE/$\overline{RESET}$ hold time (guarantees counters are reset)	250	-	ns

Notes:
1. AC test load = 50 pF.
2. Float delays are measured with 5 pF AC loads. Transition is measured at ±200 mV from steady state active levels.
3. Guaranteed by design, not tested.
4. All AC parameters are measured with V_{IL} = 0.0V and V_{IH} = 3.0V.
5. If T_{HCE} High < 2 µs, T_{CE} = 2 µs.
6. If T_{HCE} Low < 2 µs, T_{OE} = 2 µs.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 493/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 493 of 947

AC Characteristics Over Operating Conditions for XC18V01 and XC18V512

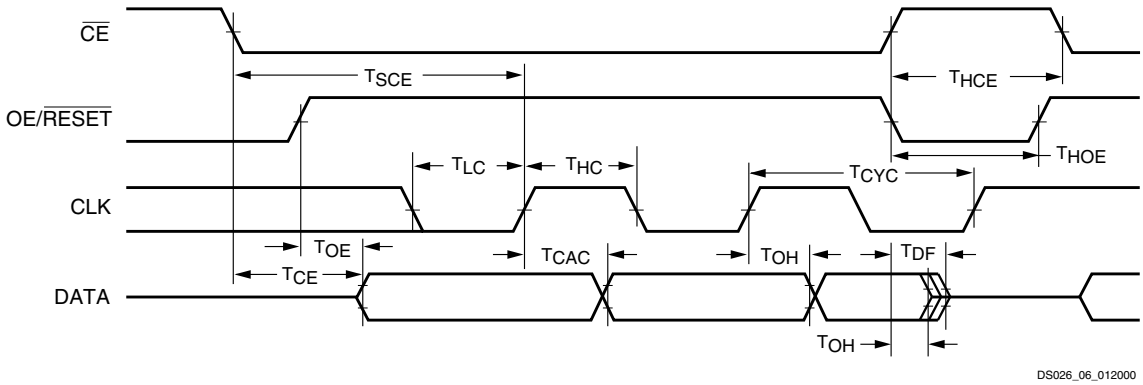


Symbol	Description	Min	Max	Units
T_{OE}	OE/RESET to data delay	-	10	ns
T_{CE}	CE to data delay	-	15	ns
T_{CAC}	CLK to data delay	-	15	ns
T_{OH}	Data hold from CE, OE/RESET, or CLK	0	-	ns
T_{DF}	CE or OE/RESET to data float delay(2)	-	25	ns
T_{CYC}	Clock periods	30	-	ns
T_{LC}	CLK Low time(3)	10	-	ns
T_{HC}	CLK High time(3)	10	-	ns
T_{SCE}	CE setup time to CLK (guarantees proper counting)(3)	20	-	ns
T_{HCE}	CE High time (guarantees counters are reset)	250	-	ns
T_{HOE}	OE/RESET hold time (guarantees counters are reset)	250	-	ns

Notes:
1. AC test load = 50 pF.
2. Float delays are measured with 5 pF AC loads. Transition is measured at ±200 mV from steady state active levels.
3. Guaranteed by design, not tested.
4. All AC parameters are measured with V_{IL} = 0.0V and V_{IH} = 3.0V.
5. If T_{HCE} High < 2 µs, T_{CE} = 2 µs.
6. If T_{HOE} High < 2 µs, T_{OE} = 2 µs.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 494 of 947

AC Characteristics Over Operating Conditions When Cascading for XC18V04 and XC18V02

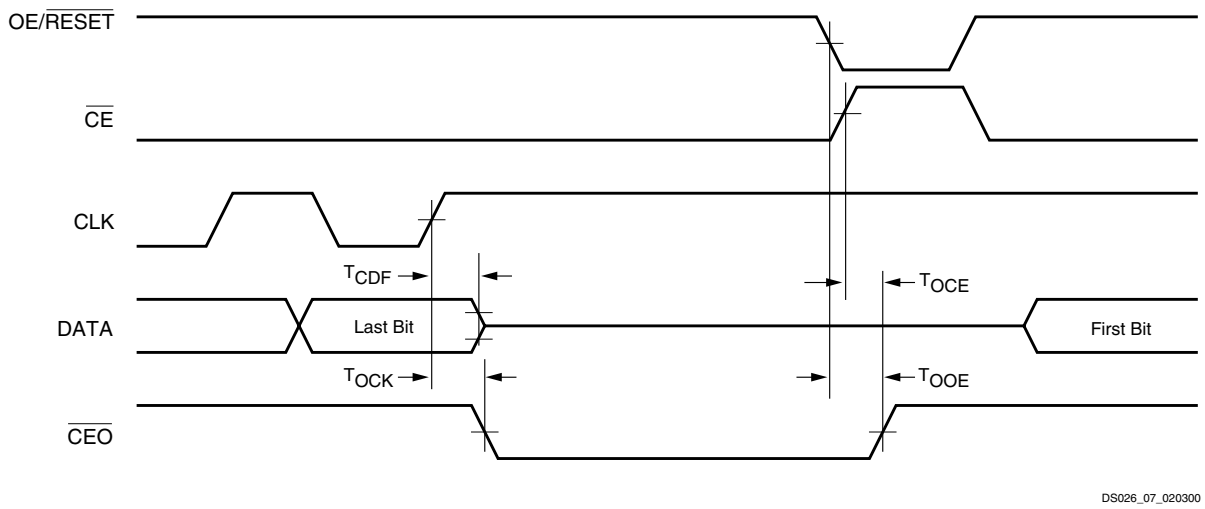


Symbol	Description	Min	Max	Units
T_{CDF}	CLK to data float delay(2,3)	-	25	ns
T_{OCK}	CLK to $\overline{CEO}$ delay(3)	-	20	ns
T_{OCE}	CE to $\overline{CEO}$ delay(3)	-	20	ns
T_{OOE}	OE/$\overline{RESET}$ to $\overline{CEO}$ delay(3)	-	20	ns

Notes:
1. AC test load = 50 pF.
2. Float delays are measured with 5 pF AC loads. Transition is measured at ±200 mV from steady state active levels.
3. Guaranteed by design, not tested.
4. All AC parameters are measured with V_{IL} = 0.0V and V_{IH} = 3.0V.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 495/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 495 of 947

AC Characteristics Over Operating Conditions When Cascading for XC18V01 and XC18V512

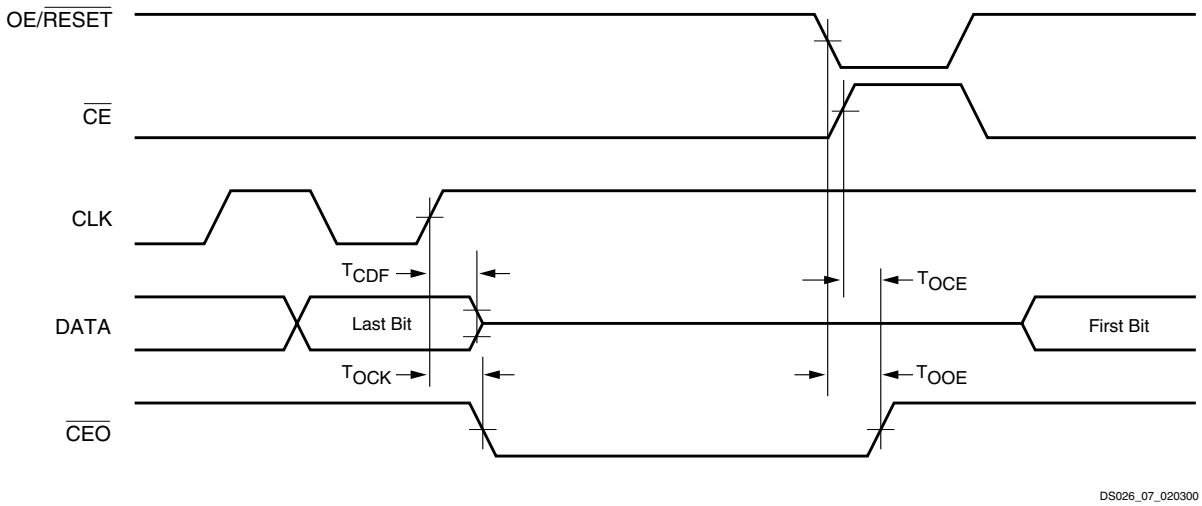


Symbol	Description	Min	Max	Units
T_{CDF}	CLK to data float delay(2,3)	-	25	ns
T_{OCK}	CLK to $\overline{CEO}$ delay(3)	-	20	ns
T_{OCE}	CE to $\overline{CEO}$ delay(3)	-	20	ns
T_{OOE}	OE/$\overline{RESET}$ to $\overline{CEO}$ delay(3)	-	20	ns

Notes:
1. AC test load = 50 pF.
2. Float delays are measured with 5 pF AC loads. Transition is measured at ±200 mV from steady state active levels.
3. Guaranteed by design, not tested.
4. All AC parameters are measured with V_{IL} = 0.0V and V_{IH} = 3.0V.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 496 of 947

Ordering Information

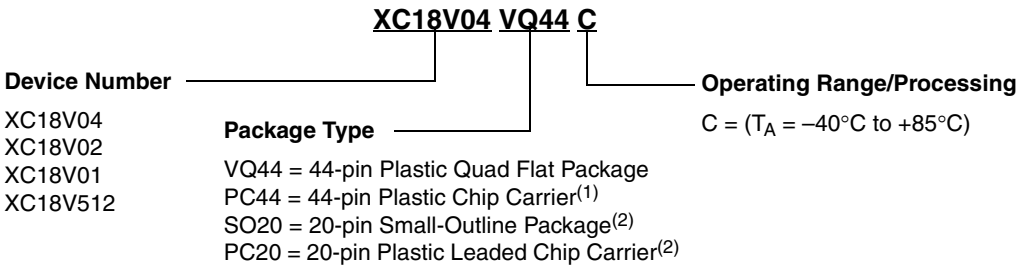


Notes:
1. XC18V04 and XC18V02 only.
2. XC18V01 and XC18V512 only.

Valid Ordering Combinations

XC18V04VQ44C	XC18V02VQ44C	XC18V01VQ44C	XC18V512VQ44C
XC18V04PC44C	XC18V02PC44C	XC18V01PC20C	XC18V512PC20C
		XC18V01SO20C	XC18V512SO20C

Marking Information


44-pin Package

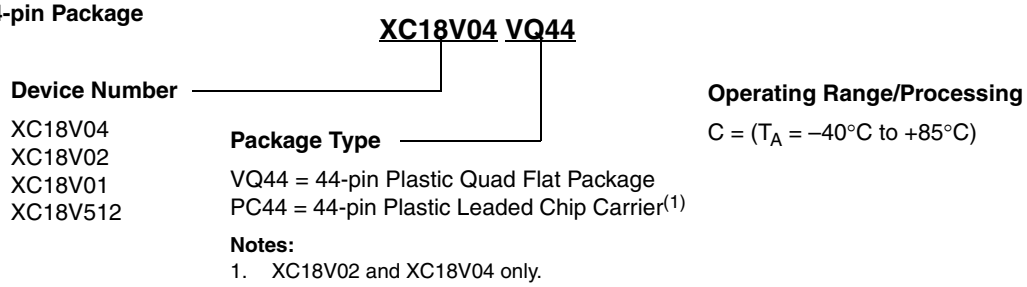

Notes:
1. XC18V02 and XC18V04 only.

20-pin Package(1)

Due to the small size of the serial PROM packages, the complete ordering part number cannot be marked on the package. The XC prefix is deleted and the package code is simplified. Device marking is as follows:

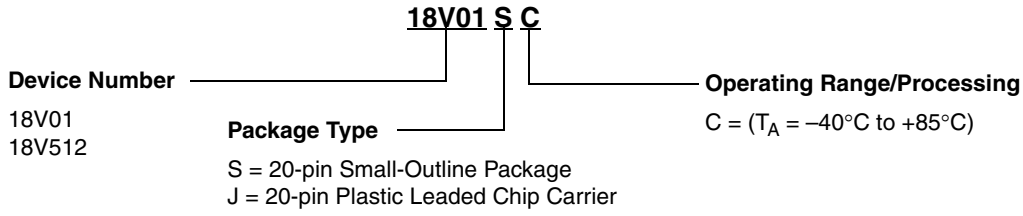

Notes:
1. XC18V01 and XC18V512 only.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 497 of 947

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
2/9/99	1.0	First publication of this early access specification
8/23/99	1.1	Edited text, changed marking, added $\overline{CF}$ and parallel load
9/1/99	1.2	Corrected JTAG order, Security and Endurance data.
9/16/99	1.3	Corrected SelectMAP diagram, control inputs, reset polarity. Added JTAG and $\overline{CF}$ description, 256 Kbit and 128 Kbit devices.
01/20/00	2.0	Added Q44 Package, changed XC18xx to XC18Vxx
02/18/00	2.1	Updated JTAG configuration, AC and DC characteristics
04/04/00	2.2	Removed stand alone resistor on INIT pin in Figure 5. Added Virtex-E and EM parts to FPGA table.
06/29/00	2.3	Removed XC18V128 and updated format. Added AC characteristics for XC18V01, XC18V512, and XC18V256 densities.
11/13/00	2.4	Features: changed 264 MHz to 264 Mb/s at 33 MHz; AC Spec.: T_{SCE} units to ns, T_{HCE} CE High time units to µs. Removed Standby Mode statement: "The lower power standby modes available on some XC18V00 devices are set by the user in the programming software". Changed 10,000 cycles endurance to 20,000 cycles.
01/15/01	2.5	Updated Figures 5 and 6, added 4.7 resistors. Identification registers: changes ISP PROM product ID from 06h to 26h.
04/04/01	2.6	Updated Figure 6, Virtex SelectMAP mode; added XC2V products to Compatible PROM table; changed Endurance from 10,000 cycles, 10 years to 20,000, 20 years;
04/30/01	2.7	Updated Figure 6: removed Virtex-E in Note 2, fixed SelectMAP mode connections. Under **AC Characteristics Over Operating Conditions for XC18V04 and XC18V02**, changed T_{SCE} from 25 ms to 25 ns.
06/11/01	2.8	**AC Characteristics Over Operating Conditions for XC18V01 and XC18V512**. Changed Min values for T_{SCE} from 20 ms to 20 ns and for T_{HCE} from 2 ms to 2 µs.
09/28/01	2.9	Changed the boundary scan order for the CEO pin in Table 1, updated the configuration bits values in the table under **Xilinx FPGAs and Compatible PROMs**, and added information to the **Recommended Operating Conditions** table.
11/12/01	3.0	Updated for Spartan-IIE FPGA family.
12/06/01	3.1	Changed Figure 7(c).
02/27/02	3.2	Updated Table 2 and Figure 6 for the Virtex-II Pro family of devices.
03/15/02	3.3	Updated Xilinx software and modified Figure 6 and Figure 7.
03/27/02	3.4	Made changes to pages 1-3, 5, 7-11, 13, 14, and 18. Added new Figure 8 and Figure 9.
06/14/02	3.5	Made additions and changes to Table 2.
07/24/02	3.6	Changed last bullet under **Connecting Configuration PROMs, page 483**.
09/06/02	3.7	Multiple minor changes throughout, plus the addition of **Pinout Diagrams, page 478** and the deletion of Figure 9.
10/31/02	3.8	Made minor change on Figure 7 (b) and changed orientation of SO20 diagram on page 5.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 498 of 947

11/18/02	3.9	Added XC2S400E and XC2S600E to Table 2.
04/17/03	3.10	Changes to **Description**, **External Programming**, and Table 2.
06/11/03	4.0	Added alternate **IDCODES** to Table 5, discontinued XC18V256 density, eliminated industrial ordering combinations, extended commercial temperature range, and added MultiPRO Desktop Tool support. Changed T_{HOE} and T_{HCE} to 250 ns in the tables on page 489 and page 490. Made change in capacitance values **DC Characteristics Over Operating Conditions**. Added Note 3 to Table 1. Other minor edits.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 499 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 500 of 947

Glossary

Click on a letter, or scroll down to view the entire glossary.

A B C D E F G H I J K L M N O P Q R S T U V W X Z

A

AC Coupling

Method of interfacing drivers and receivers through a series capacitor. Often used when the differential swing between drivers and receivers is compatible, but common mode voltages of driver and receiver are not. Requires that a minimum data frequency be established based on the RC time constant, necessitating a run length limit.

Addressing Modes

Techniques used by software or hardware in calculating an address.

ALU (Arithmetic and Logic Unit)

The part of a processor that performs integer addition, subtraction, multiplication, division and other Boolean logic instructions.

AQL (Acceptable Quality Level)

The relative number of devices, expressed in parts-per-million (ppm), that might not meet specification or might be defective. Typical values are around 10 ppm.

ASIC (Application-Specific Integrated Circuit)

An integrated circuit designed to perform a particular function by defining the interconnection of a set of basic circuit building blocks drawn from a library provided by the circuit manufacturer.

Assembler

A software development tool that translates assembly language programs into machine instructions that the processor can decode and execute.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 501 of 947

Assembly Language

A human-readable form of a processor's instruction set. Most processor-specific functions are written in assembly language.

Asynchronous

Logic that is not synchronized by a clock. Asynchronous designs can be faster than synchronous ones, but are more sensitive to parametric changes, and are thus less robust.

ATM (Asynchronous Transfer Mode)

A very-high-speed (megahertz to gigahertz) connection-oriented bit-serial protocol for transmitting data and real-time voice and video in fixed-length packets (48-byte payload, 5-byte header).

Attenuation

Reduction in amplitude of a signal.

B

Back Annotation

Automatically attaching timing values to the entered design format after the design has been placed and routed in a field-programmable gate array (FPGA).

BER (Bit Error Rate)

A measurement of the number of errors detected at a receiver in a given length of time, sometimes specified as a percentage of received bits; sometimes specified in exponential form (10E-8 to indicate 1 bit error in 10E-8 bits).

BERT (Bit Error Rate Test, Bit Error Rate Tester)

A test or an instrument used to determine the Bit Error Rate (BER) of a device or system under test. It is generally made up of a test pattern generator, receiver, and analyzer.

Big Endian

A representation of a multi-byte value that has the most significant byte of any multi-byte data field stored at the lowest memory address. Also see "Little Endian.".

BIST (Built-In Self Test)

The technique of designing circuits with additional logic that can be used to test proper operation of the primary (functional) logic.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 502 of 947

Bitstream

The bitstream is a binary representation of an implemented FPGA design. The bitstream is generated by Xilinx bit generation tools (BitGen and Makebits) and is denoted with the `.bit` extension. For information on creating BIT files, refer to the *Hardware Debugger Reference/User Guide*.

Block RAM

An 18 Kb block of random access memory (RAM) inside the Virtex-II Pro device. Dual-port and synchronous operation are desirable.

Block SelectRAM

Fully-synchronous, dual-port memories in the Virtex-II Pro FPGAs. Each of these memories contain 18 x 1024 (18,432) bits. The organization of each memory is configurable. Block SelectRAM resources complement smaller, distributed, LUT-based SelectRAM resources.

Book “E”

A Motorola and IBM jointly written architectural definition and instruction set for embedded PowerPC implementations.

Boot ROMs

The program used to bring up a computer or system that is stored in Read Only Memory

Boundary Scan Interface

One of the configuration interfaces on the Virtex device. This is a bit-serial interface. The Boundary Scan interface is also known as the JTAG port. Also see “SelectMAP Interface.”

Breakpoint

A location in a program at which execution is to be stopped and control of the processor switched to the debugger. Mechanisms for creating and removing breakpoints are provided by most debugging tools.

BSP (Board Support Package)

The purpose of the BSP is to isolate the user design from hardware making it easier to write new applications and to port applications from other environments.

BSP consists of a set of software modules that offer interface to peripheral devices and low-level processor core functions for user software or C library. For example, these functions include hardware initialization, boot monitor access, drivers for all the available resources and features on board.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 503 of 947

C

Cache

A small block of high-speed memory located between the processor and main memory. Cache stores frequently used data and instructions. Cache improves system performance by reducing the need to access the system's slower main memory.

Cache Block

See "Cache Line"

Cache Line

A portion of a cache array that contains a copy of contiguous system-memory addresses. Cache lines in PPC405 are 32 bytes long and aligned on a 32 byte address.

Cache Set

See "Congruence Class."

Capture Data

The flip-flop and pad data saved from the logic cells and I/O blocks into the bitstream for readback. Use the CAPTURE_VIRTEX primitive in your HDL code to specify the trigger and clock for the capture operation.

CCLK (Configuration Clock)

During configuration, the configuration clock (CCLK) is an output in Master modes or in the Asynchronous Peripheral mode but is an input in Slave, Synchronous Peripheral, Express, and SelectMAP/Slave Serial modes. After configuration, CCLK has a weak pull-up and can be selected as the readback clock.

CDR (Clock/Data Recovery)

Feature of most high-speed serial transcievers. At the receiver, a clock is generated based on the timing of data transitions. In this way, a clock signal is derived from the data.

Channel Bonding

Feature of multi-channel high-speed transcievers. Allows multiple channels to be sued together, offering a greater aggregate bandwidth.

Chirp

Bit sequence which is transmitted by a high-speed transciever when it is not in use. The chirp is usually a repeating pattern of IDLE characters. The purpose of the chirp is to keep clock recovery circuits aligned and active while the link is not transmitting data.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 504 of 947

CISC (Complex Instruction Set Computer)

The architecture of a processor family. CISC processors generally feature variable-length instructions, multiple addressing formats, and contain only a small number of general-purpose registers. Intel's 80x86 family is the quintessential example of CISC.

CLB (Configurable Logic Block)

Xilinx-specific name for a block of logic surrounded by routing resources. The functional elements for constructing logic circuits. The Virtex-II Pro CLB is made up of four slices, and each slice contains two Logic Cells.

CML (Current Mode Logic)

A differential I/O standard used in high-speed serial channels. Voltage swing is typically from 450 mV to 1200 mV.

Coherency

Coherency describes the ordering of reads from and writes to a single memory location. A memory system is coherent when the value read from a memory address is always the last value written to the address. In a system where all devices read and write from a single, shared system memory, memory is always coherent.

Comma

A comma is a “K” character used by the transceiver to align the serial data on a byte/half-word boundary (depending on the protocol used), so that the serial data is correctly decoded into parallel data.

Common Mode

The DC component of a signal. In differential channels, it is the average voltage of the differential pair.

Compiler

Software that converts a higher-language description into a lower-level representation. For FPGAs, the complete partition, place, and process.

Configuration Bitstream

Configuration commands with configuration data.

Configuration Commands

Instructions for the Virtex-II Pro device. There are two classes of Configuration Command — Major and Minor. The Major Commands read and write data to configuration registers in the Virtex-II Pro device. The Minor commands instruct the Virtex-II Pro configuration logic to perform specific functions.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 505 of 947

Configuration Data

Bits that directly define the state of programmable logic. These are written to a Virtex-II Pro device in a configuration bitstream, and read as readback data from a Virtex-II Pro device.

Configuration File

The internally stored file that controls the FPGA sot hat it performs the desired logic function. Also, the act of loading an FPGA with that file. That is, the process of programming Xilinx SRAM-based FPGAs with a bitstream.

Configuration Frame

The configuration bits in a Virtex-II Pro device are organized in columns. A column of CLBs with the I/O blocks above and below the CLBs contain 48 frames of configuration bits. The smallest number of bits that can be read or written through the configuration interfaces is one frame.

Configuration Interface

A logical interface on the Virtex-II Pro device through which configuration commands and data can be read and written. A interface consists of one or more physical device pins.

Configuration Readback

The operation of reading configuration data (also known as readback data) from a Virtex-II Pro device.

Congruence Class

A collection of cache lines with the same index.

Constraints

Performance requirements imposed on the design, usually in the form of maximum allowable delay, or the required operating frequency.

Context Switch

The process of switching from one task to another in a multitasking operating system. A context switch involves saving the context of the running task and restoring the previously-saved context of the other.

CoreConnect™ Bus Architecture

An interconnection internal bus developed by IBM. It eases the integration and reuse of processor, system, and peripheral cores Elements of CoreConnect architecture include the processor local bus (PLB), the on-chip peripheral bus (OPB), a bus bridge, and a device control register (DCR) bus.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 506 of 947

Cross Compiler

A compiler that runs on a particular processor architecture and produces code for a different architecture.

Crosstalk

Undesirable signal coupling from noisy aggressor nets to victim nets. May be eliminated by increasing the spacing between the nets or reducing signal amplitude of the aggressor net.

$\overline{CS}$ Pin

The $\overline{CS}$ pin is the Chip Enable pin for Virtex-II Pro devices. It is used only in SelectMAP mode. When $\overline{CS}$ is asserted (Low) the device examines data on the Data bus. When $\overline{CS}$ is de-asserted (High), all CCLK transitions are ignored.

D

DataFrame

A DataFrame is a block of configuration data. A configuration bit-stream contains many such frames, each with a start bit and stop bits. Also see "Configuration Frame."

DC Balanced

A channel is said to be DC Balanced if it has an equal number of 1's and 0's transmitted across it. Encoding schemes like 8B10B are designed to ensure this.

DC Coupling

Method of interfacing drivers and receivers without the use of series capacitors. A direct connection (through PCB trace) from driver to receiver.

DCR (Device Control Register)

A CoreConnect bus. DCR is designed to transfer data between the CPU's general purpose registers (GPRs) and the DCR slave logic's device control registers (DCRs).

Debug Monitor

A piece of embedded software that has been designed specifically for use as a debugging tool. It usually resides in ROM and communicates with a debugger via a serial port or network connection. The debug monitor provides a set of primitive commands to view and modify memory locations and registers, create and remove breakpoints, and execute your program. The debugger combines these primitives to fulfill higher-level requests like program download and single-step.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 507 of 947

Debugger

A software development tool used to test and debug embedded software. The debugger runs on a host computer and connects to the target through a serial port or network connection. Using a debugger you can download software to the target for immediate execution. You can also set breakpoints and examine the contents of specific memory locations and registers.

Deterministic Jitter

The component of jitter attributable to the data pattern in the channel. Different digital patterns have different spectral contents. These differing spectral contents give rise to varying amounts of signal jitter.

Device Pin

One of the electrical connections on the package containing the Virtex-II Pro device.

Dhrystone MIPS

Dhrystone is a benchmark program for testing a system's integer performance. The objective is to compare the performance of a machine against the performance of a reference machine. The industry has adopted the VAX 11/780 as the reference 1 MIPS (Million Instruction Per Second) machine.

Differential Signaling

A signaling scheme which uses two complementary signals to transmit data. Differential signaling offers faster data rates at reduced signal swing with higher signal-to-noise ratio.

DIN Pin

During serial configuration, the DIN pin is the serial configuration data input receiving data on the rising edge of CCLK. During parallel configuration, DIN is the D0 input. After configuration, DIN is a user-programmable I/O pin.

Dirty Bit

A bit in a memory cache or virtual memory page that has been modified by the CPU but not yet written back to storage.

Dispersion

"Smearing" of a signal or waveform as a result of transmission through a non-ideal transmission line. Through a non-ideal medium, signals travel at different velocities according to their frequency. Dispersion of the signal is the result. All cables and PCB transmission lines are non-ideal.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 508 of 947

DONE Pin

The DONE pin on a Xilinx FPGA is a bidirectional signal with an optional internal pull-up resistor. As an output, it indicates the completion of the configuration process. As an input, a low level on DONE can be configured to delay the global logic initialization and the enabling of outputs.

Double Word

Eight bytes or 64 bits.

DOUT Pin

During configuration in any mode except Express and SelectMAP, the DOUT pin is the serial configuration data output that can drive the DIN pin of daisy-chained slave FPGAs. DOUT data changes on the rising edge of CCLK, one-and-a-half CCLK periods after it is received at the DIN pin (in Master Serial Mode only).

DOUT/BUSY Pin

For Virtex-II Pro devices, the DOUT/BUSY pin has a dual purpose, depending on device mode. When the device is in Serial mode, this pin functions as DOUT. When the device is in SelectMAP/Slave Parallel mode, this pin functions as a handshaking signal. If BUSY is asserted (High) on a rising edge of CCLK, the data is not seen on the data bus, and should be held until the data is accepted.

DRAM (Dynamic Random Access Memory)

A low-cost read-write memory where data is stored on capacitors and must be refreshed periodically. DRAMs are usually addressed by a sequence of two addresses, row address, and column address, which makes them slower and more difficult to use than SRAMs. Also see "SRAM."

DSL (Digital Subscriber Line)

Sometimes referred to as a "last-mile technology" because it is used only for connections from a telephone switching station to a home or office, not between switching stations. DSL uses sophisticated modulation schemes to pack data onto POTS (ordinary analog telephone) wires. Downstream data rates of up to 32 Mb/s can be achieved. The physical distance between the subscriber and the switching station must be kept short, however, to attain the higher speeds.

DSOCM (Data-Side On Chip Memory)

See "OCM (On-Chip Memory)."

DSP (Digital Signal Processing)

The manipulation of analog data that has been sampled and converted into a digital representation. Examples are filtering, convolution, Fast-Fourier-Transform, and so on.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 509 of 947

E

EDIF (Electronic Data Interchange Format)

Industry standard for specifying a logic design in text (ASCII) form.

EEMBC (Embedded Microprocessor Benchmark Consortium)

It develops and certifies real-world benchmarks and benchmark scores to help designers select embedded processors.

Effective Address

The un-translated memory address as seen by a program.

Emulator

Short for "ICE (In-Circuit Emulator)."

Endianness

See "Big Endian" and "Little Endian."

Equalization

Amplification or attenuation of certain frequency components of a signal. Used to counteract the effects of a non-ideal transmission medium.

ESD (Electrostatic Discharge)

High-voltage discharge can rupture the input transistor gate oxide. ESD-protection diodes divert the current to the supply leads.

Exception

An abnormal event or condition that requires the processor's attention. They can be caused by instruction execution or an external device. The processor records the occurrence of an exception and they often cause an interrupt to occur.

Eye Diagram

An eye diagram of a signal overlays the signal's waveform over many cycles. Each cycle's waveform is aligned to a common timing reference, typically a clock. An eye diagram provides a visual indication of the voltage and timing uncertainty associated with the signal. It can be generated by synchronizing an oscilloscope to a timing reference.

The vertical thickness of the line bunches in an eye diagram indicate the magnitude of AC voltage noise, whereas the horizontal thickness of the bunches where they cross over is an indication of the AC timing noise or jitter. Fixed DC voltage and timing offsets are indicated by the position of the eye on the screen.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 510 of 947

Eye Mask

The size of the eye opening in the center of an eye diagram indicates the amount of voltage and timing margin available to sample this signal. Thus, for a particular electrical interface, a fixed reticule or window could be placed over the eye diagram showing how the actual signal compares to minimum criteria window, know as the eye mask. If a margin rectangle with width equal to the required timing margin and height equal to the required voltage margin fits into the opening, then the signal has adequate margins. Voltage margin can often be traded of for timing margin.

F

Fall Time

The time it takes for a waveform to transition from the high logic state to the low logic state. Fall time is usually measured from 90% of the total signal swing to 10% of the signal swing.

FIFO (First-In First-Out)

FIFO memory where data is stored in the incoming sequence and is read out in the same sequence. Input and output can be asynchronous to each other. A FIFO needs no external addresses, although all modern FIFOs are implemented internally with RAMs driven by circular read and write counters.

FIT (Failure In Time)

Describes the number of device failures statistically expected for a certain number of device-hours. Expressed as failures per one billion (10^9) device hours. Device temperature must be specified. Mean time between failure (MTBF) can be calculated from FIT. 10 FITs are good; 100 FITs are bad.

FIT (Fixed Interval Timer)

One of several user-accessible timers available in the Virtex-II Pro FPGA's PowerPC 405 core. The FIT provides timer interrupts having a repeatable period. The FIT is functionally similar to an auto-reload Programmable Interval Timer (PIT), except that only a smaller fixed selection of interrupt periods is available.

Flash

Non-volatile programmable technology, and alternative to electrically-erasable programmable read-only memory (EEPROM) technology. The memory content can be erased by an electrical signal. This allows in-system programmability and eliminates the need for ultraviolet light and quartz windows in the package.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 511 of 947

Flip-Flop

Single-bit storage cell that samples its data input at the active (rising or falling) clock edge, and then presents the new state on its Q output after that clock edge, holding it there until after the next active clock edge.

Flush

A cache or TLB operation that involves writing back a modified entry to memory, followed by an invalidation of the entry.

FPGA (Field Programmable Gate Array)

An integrated circuit that contains configurable (programmable) logic blocks and configurable interconnect between these blocks. Xilinx FPGAs are SRAM- based programmable logic devices (PLDs).

FPU (Floating Point Unit)

Floating-point operations include any operations that involve fractional numbers.

Frame

See "Configuration Frame."

Function Generator

Also called a look-up table (LUT), with N inputs and one output. Can implement any logic function of its N inputs. N can be between 3 and 6; 4-input function generators are most popular.

G

Gate

Smallest logic element with several inputs and one output. The AND gate output is High when all inputs are High. The OR gate output is High when at least one input is High. The NAND gate output is Low when all inputs are High. A 2-input NAND gate is used as the measurement unit for gate array complexity.

Gate Array

An ASIC where transistors are predefined, and only the interconnect pattern is customized for the individual application.

GNU

A recursive acronym "GNU Not Unix" (pronounced "guh-NEW"). The Free Software Foundation's GNU project was launched in 1984 to develop a complete Unix-like operating system that is freely distributed.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 512 of 947

GUI (Graphical User Interface)

The way of representing the computer output on the screen as graphics, pictures, icons, and windows. Pioneered by Xerox and the Apple Macintosh, now universally adopted, e.g., by Windows95 and others.

H

Halfword

Two bytes, or 16 bits.

HardWire

Xilinx name for a low-cost derivative of an FPGA, where the configuration is fixed, but functionality and footprint are identical with the original FPGA-based design.

Harvard Architecture

Harvard architecture has separate data bus and an instruction bus. This allows instruction and data access in parallel making faster execution than a Von-Neuman architecture possible. PPC405 core is built on Harvard architecture.

HDC Pin

The High during configuration (HDC) pin is driven High until the I/Os become active in the Startup sequence. It is available as a control output indicating that configuration is not yet complete. After configuration, HDC is a user-programmable I/O pin.

HDL (Hardware Description Language)

A kind of language used for the conceptual design of integrated circuits. Examples are VHDL and Verilog.

Hierarchical Design

Design description in multiple layers, from the highest (overview) tot he lowest (circuit details). An alternative is flat design, where everything is described at the same level of detail.

Hit

An indication that requested information exists in the accessed cache array, the associated fill buffer, or on the corresponding OCM interface.

HyperTransport™

A high-performance bus solution developed by Advanced Micro Devices and several partners to break the I/O bottleneck in 32- and 64-bit systems. HyperTransport provides a scalable architecture that provides better than an order of magnitude increase in bus transaction

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 513 of 947

throughput over existing I/O bus architectures such as PCI, PCI-X and AGP. Formerly called Lightning Data Transport (LDT).

I

ICE (In-Circuit Emulator)

A debugging tool that takes the place of (emulates) the processor on the target board. Emulators frequently incorporate a special "bond-out" version of the target processor that allows the user to observe and record its internal state as the program is executing.

Idle Pattern

A data sequence transmitted by a high-speed transciever as a placeholder or for link maintenance. The particular sequence of an IDLE pattern is determined by the communication protocol, and is usually a control character like K28.5.

Impedance (Characteristic Impedance)

Electrical characteristic of a transmission line, derived from the capacitance and inductance per unit length.

Index Register

A special purpose register used by a processor when performing indexed addressing. The value in the index register is usually the reference location to which a displacement will be added.

$\overline{\text{INIT}}$ Pin

The $\overline{\text{INIT}}$ pin is a quadruple function signal. Before and during configuration, $\overline{\text{INIT}}$ is a bidirectional signal. A 1 - 10 kΩ external pull-up resistor is recommended. As an active-Low open-drain output, $\overline{\text{INIT}}$ is held Low during power stabilization and internal clearing of the configuration memory. As an active-Low input, it can be used to hold the FPGA in the internal WAIT state before the start of configuration. During configuration, a Low on this output indicates that a configuration data error has occurred. After the I/O become active in the Startup sequence, $\overline{\text{INIT}}$ becomes a user-programmable I/O.

Instruction Set

Is referred to the set of instructions that the microprocessor can execute. The instruction set specifies the types of instructions (such as load/store, integer arithmetic, and branch instructions), the specific instructions, and the encoding used for the instructions. The instruction set definition also specifies the addressing modes used for accessing memory.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 514 of 947

Interrupt Latency

The amount of time between the assertion of an interrupt and the start of the associated interrupt service routine.

Interrupt Service Routine

A section of code written to handle the tasks associated with an interrupt request.

Interrupt Vector

A special code that identifies the circuit requesting an interrupt.

IP (Intellectual Property)

In the legal sense, patents, copyrights, and trade secrets. In integrated circuits (ICs), predefined large functions, called "cores," that help the user complete a large design faster.

ISA (Instruction Set Architecture)

A term referring to a family of microprocessors with similar basic design, for example the PowerPC architecture includes Motorola´s PowerQUICC, PPC7440, 7410, IBM's PPC 405, 440, and Xilinx Virtex-II Pro.

ISI (Inter-Symbol Interference)

A form of data corruption or noise due to the effect that data has on data-dependent channel characteristics.

ISOCM (Instruction-Side On Chip Memory)

See "OCM (On-Chip Memory)."

J

Jitter

The jitter of a periodic signal is the delay between the expected transition of the signal and the actual transition. Jitter is a zero mean random variable. When worst case analysis is undertaken the maximum value of this random variable is used.

Jitter Tolerance

Jitter tolerance is defined as the peak-to-peak amplitude of sinusoidal jitter applied on the input that causes a predefined, acceptable loss at the output. For example jitter applied to the input of an OC-N equipment interface that causes an equivalent 1dB optical power penalty.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 515 of 947

Jitter Transfer

Jitter transfer is defined as the ratio of jitter on the output of a device to the jitter applied on the input of the device, versus frequency. Jitter transfer is important in applications where the system is utilized in a loop-timed mode, where the recovered clock is used as the source of the transmit clock.

JTAG (Joint Test Action Group)

Earlier name for IEEE 1149.1 boundary scan, a method for testing boards and integrated circuits. Also see "Parallel Cable IV."

K

Kernel

An essential part of any multitasking operating system software which controls how the rest of the system can operate. The kernel is to software what the CPU is to hardware.

L

LAN (Local Area Network)

A computer network that spans a relatively small area. Most LANs are confined to a single building or group of buildings. However, one LAN can be connected to other LANs over any distance via telephone lines and radio waves. A system of LANs connected in this way is called a WAN (Wide Area Network).

Latency

The time between when something happens and when its response is generated. This is often critical in real-time applications

LC (Logic Cell)

Metric for FPGA density. The basic building block of the Virtex-II Pro CLB. An LC includes a 4-input function generator, carry logic, and a storage element.

LDC Pin

Low during configuration (LDC) is driven Low until the I/Os become active in the Startup sequence. It is available as a control output indicating that configuration isn't complete. After configuration, LDC is a user-programmable I/O pin.

LDT (Lightning Data Transport)

See "HyperTransport™."

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 516 of 947

Linker

A software development tool that accepts one or more object files as input and outputs a relocatable program. The linker is thus run after all of the source files have been compiled or assembled.

Little Endian

A representation of a multi-byte value that has the least significant byte of any multi-byte data field stored at the lowest memory address. Also see "Big Endian."

LogiBLOX

Library of logic modules, often with user-definable parameters, like data width. Similar to LPM.

Logical Address

Synonym for effective address.

Loopback

Path in a high-speed transceiver which connects the output to the input, on either the PMA or PCS side, for testing purposes.

LPM (Library of Parametrized Modules)

Library of logic modules, often with user-definable parameters, like data width. Similar to LogiBLOX.

LUT (Look-Up Table)

Also called a function generator with N inputs and one output. Can implement any logic function of its N inputs. N is between 3 and 6; most popular are 4-input LUTs.

LUT SelectRAM

Shallow RAM structure implemented in CLB look-up tables (LUTs). Also see *"Block SelectRAM."*

LVDS (Low Voltage Differential Signaling)

A differential I/O standard commonly used for high-speed, low-swing signals.

M

Machine Language

A computer language that is directly executable by a computer without the need for translation by a compiler or an assembler. Although the computer works on binary patterns, the program can usually be entered in octal or hexadecimal.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 517 of 947

MAN (Metropolitan Area Network)

A data network designed for a town or city. In terms of geographic breadth, a MAN is larger than a LAN (Local Area Network), but smaller than a WAN (Wide Area Network).

Mapping

Process of assigning portions of the logic design to the physical chip resources (CLBs). With FPGAs, mapping is more demanding and more important a process than with gate arrays. Also see "Synthesis."

Masking

A process in which an operation can be performed on a single bit.

Memory Map

Documentation that lists or shows the function of each location in memory.

Memory-Mapped I/O

A system of I/O in which each I/O location is treated as if it were memory.

MicroBlaze

A 32-bit soft processor developed by Xilinx

Miss

An indication that requested information does not exist in the accessed cache array, the associated fill buffer, or on the corresponding OCM interface.

MMU (Memory Management Unit)

Performs address translation (logical to physical) and protection functions. The MMU divides logical storage into pages.

Mnemonic

A easy to remember string representing a processor instruction. For example, EIEIO is the mnemonic of the PPC405 instruction 'Enforce In Order Execution of I/O'.

MTBF (Mean Time Between Failures)

The statistically relevant up-time between equipment failures. Also see "FIT (Failure In Time)."

Multilevel Signaling

System where multiple logic levels are utilized instead of just two (high and low). This enables the tranmission of multiple bits in a single waveform.

See http://www.signalintegrity.com/Pubs/misc/mls.htm.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 518 of 947

MultiLINX Cable

The MultiLINX cable provides many complex functions and can be loaded with new firmware as it becomes available. It can be connected to the host computer in two ways: via a Serial port or a USB port. The MultiLINX cable is supported by the Hardware Debugger software for Slave Serial and SelectMAP/Slave Parallel programming (as appropriate), as well as readback/verify. It is also supported by the iMPACT software for JTAG programming of both CPLDs and FPGAs.

Multiprocessing

The use of more than one processor in a single computer system. So-called "multiprocessor systems" usually have a common memory space through which the processors can communicate and share data. In addition, some multiprocessor systems support parallel processing.

N

Netlist

Textual description of logic and interconnects. Also see "XNF File" and "EDIF (Electronic Data Interchange Format)."

Non-maskable Interrupt (NMI)

An interrupt that cannot be turned off.

NRE (Non-Recurring Engineering) Charges

Start-up cost for the creation of an ASIC, gate array, or HardWire. Pays for layout, masks, and test development. FPGAs and CPLD do not require NRE.

O

Object Code

The form of software after it has been translated (compiled) from the source code format a programmer writes into the machine format a microprocessor can understand. A set of processor-readable opcodes and data. The output of compilers, assemblers, linkers, and locators are files containing object code.

OCM (On-Chip Memory)

Interface that supports the attachment of additional memory to the instruction and data caches, and that can be accessed at performance levels matching the cache arrays.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 519 of 947

On-Chip Debugger

It can be considered as advanced on-chip debug monitor. It usually allows code download, memory/resource access, single stepping, reset, status, etc.

OPB (On-chip Peripheral Bus)

A CoreConnect bus. OPB is architected to alleviate system performance bottlenecks by reducing capacitive loading on the Processor Local Bus (PLB). OPB is designed to support lower-performance/speed peripherals such as IIC, UART, GPIO, USB, External Bus Controller, etc

Optimization

Design change to improve performance. Also see "Synthesis."

Overshoot

Phenomenon where a signal rises to a level greater than its steady-state voltage before settling to its steady-state voltage.

P

Pad

Pad bits are extra bits used to make the total number of bits in a frame an integral multiple of 32, the number of bits in a configuration word. A pad word is an extra word used at the end of a configuration frame for pipelining. A pad frame is an extra configuration frame used at the beginning of a configuration readback and at the end of a configuration write for pipelining.

Parallel Cable IV

Xilinx Parallel Cable IV (PC IV) is a high-speed download cable that configures or programs all Xilinx FPGA, CPLD, ISP PROM, and System ACE MPM devices. The cable takes advantage of the IEEE 1284 ECP protocol and Xilinx iMPACT software to increase download speeds over eight times faster than existing solutions.

Partitioning

In FPGAs, the process of dividing the logic into subfunctions that can later be placed into individual CLBs. Partitioning precedes placement.

PCMCIA

Personal Computer Memory Card Interface Association. Physical and electrical standard for small plug-in boards for portable computers.

PCS (Physical Coding Sublayer)

Part of the physical layer of the ISO/OSI reference stack model for Gigabit Ethernet. The PCS encodes 8-bit data octets into 10-bit code

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 520 of 947

groups, which it passes down to the "PMA (Physical Media Attachment)." In reverse direction, it also decodes 10-bit code groups passed up from the PMA.

Peak-to-Peak

In the case of peak-to-peak voltage, a measure of a signal's total amplitude. In the case of peak-to-peak jitter, a measure of the extremes of excursion of the bit transition times.

PECL (Positive Emitter-Coupled Logic)

A differential I/O standard based on the ECL standard, but which operates with a positive supply voltage. (ECL uses a negative supply voltage.) PECL is used in clocking and high-speed data applications.

Peripheral Component Interface (PCI)

Synchronous bus standard characterized by short range, light loading, low cost, and high performance. 66 MHz PCI can support data byte transfers up to 528 megabytes per second (MB/s) on 64 parallel data lines.

Physical Address

The actual address that is placed on the address bus when accessing a physically implemented memory location or register. This address can be translated from the effective address. When address translation is not used, this address is equal to the effective address.

Pin-Locking

Rigidly defining and maintaining the functionality and timing requirements of device pins while the internal logic is still being designed or modified. Pin-locking has become important, since circuit board fabrication times are longer than PLD design implementation times.

PIP (Programmable Interconnect Point)

In Xilinx FPGAs, a point where two signal lines can be connected, as determined by the device configuration.

Placement

In FPGAs, the process of assigning specific parts of the design to specific locations (CLBs) on the chip. Usually done automatically. Also see "Partitioning."

PLB (Processor Local Bus)

A CoreConnect bus. PLB interconnects high-bandwidth devices such as processor cores, external memory interfaces, PCI, and DMA controllers. PLB offers 64- and 128-bit implementations

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 521 of 947

PLD (Programmable Logic Device)

Generic name for all programmable logic: PALs, CPLDs, and FPGAs.

PLL (Phase-Locked Loop)

An electronic circuit that controls an oscillator so that it maintains a constant phase angle relative to a reference signal.

PMA (Physical Media Attachment)

Part of the physical layer of the ISO/OSI reference stack model for Gigabit Ethernet. Serializes code-grouped data passed to it from the PCS (Physical Coding Sublayer), and deserializes data to be passed up to the PCS.

Polling

A process in which the status of devices attached to a bus system is periodically sampled.

PowerPC

A RISC-based computer architecture developed jointly by IBM, Apple Computer, and Motorola corporation. The name PowerPC is derived from IBM's name for the POWER (Performance Optimization With Enhanced RISC) architecture.

PRBS (Pseudo-Random Bit Sequence)

A pattern that appears to be random, but is actually a predictable and repeatable sequence with a very long interval (i.e., billions of bits before repeating), depending on the pattern.

Preamble

The Preamble is a 4-bit binary sentinel ("0010"b) used to indicate the beginning of the LengthCount in the Header portion of the bitstream. At the beginning of configuration, FPGAs ignore all data prior to the preamble but counts the number of data bits preceding the preamble, and the LengthCount counter increments for every rising CCLK edge, even the ones proceeding the preamble.

Pre-emphasis

Pre-emphasis is magnitude boosting of high frequency spectral components before launching the signal (wave) onto the Transmission Line. Transmission Lines embedded in most standard PCB materials (FR4, Rogers 43xx, Nelco and Rogers) suffer varying degrees of dispersion and loss in the 1 gigahertz spectrum. This is mostly due to conductance losses (leakage from the copper trace to any other conducting structure) and Skin Effect. Dispersion is a phenomenon whereby spectral components travel at different velocities. The waveform looks smeared when it arrives at the receiver.

Both of these "characteristics" play into a diminished and poorly received signal. By boosting the high freq. spectral components, the

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 522 of 947

magnitude of these components can be diminished as the wave travels through the Transmission Line, but since it starts out larger than the lower frequency components, the composite signal arrives at the receiver looking the way it was intended.

Pre-emphasis is done by simply increasing the maximum amplitude of the signal for one bit period. If the signal is 1 bit in duration, the amplitude is allowed to rise to a value which is some percentage greater in magnitude. At this point, if the signal is to stay at the same logic state, the driver sends a decreased magnitude signal, or nominal logic level. Every time a transition occurrs, the greater magnitude level is used. For all times after this that the same level is to be transmitted, the nominal magnitude is used.

Priority

the level of importance of an event. Most often, interrupts are assigned priorities.

Privileged (or Supervisor) Mode

Privileged mode allows programs to access all registers and execute all instructions supported by the processor. Normally, the operating system and low-level device drivers operate in this mode.

Program Counter

A register that places addresses on the bus to retrieve information stored within a program.

$\overline{\text{PROGRAM}}$ Pin

The $\overline{\text{PROGRAM}}$ pin is an active-Low input that forces clearing of the FPGA configuration memory and is used to initiate a configuration cycle. While $\overline{\text{PROGRAM}}$ is held Low, the FPGA drives $\overline{\text{INIT}}$ Low and continues to clear the configuration memory. When $\overline{\text{PROGRAM}}$ goes High, the FPGA finishes the current clear cycle, executes another complete clear cycle, goes into a WAIT state, and releases $\overline{\text{INIT}}$.

R

Random Jitter

Jitter caused by Power Supply noise, temperature variations and crosstalk.

Readback

Initiating a readback causes the configuration memory to become accessible to be serially clocked out and read from the device, or (byte-wide in SelectMAP/Slave Parallel modes). The configuration memory contains the configuration data, facilitating a Read-Verification of the data. The configuration memory can also contain the CLB output logic states facilitating a Read-Capture of the internal logic states.Read-Verification and Read-Capture are used by the Hardware Debugger

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 523 of 947

for hardware verification. For information on the readback specification and timing, refer to *The Programmable Logic Data Book*. For information on using the readback component in a design, refer to the *Libraries Guide*. For information on enabling the readback function in the Implementation Software, refer to the *Development System Reference Guide*. For information on using the Hardware Debugger refer to the *Hardware Debugger Reference/User Guide*. For information on connecting the XChecker cable for readback, refer to the *Hardware Users Guide*.

Readback Data

Configuration data read from a Virtex-II Pro device. The data is organized as configuration frames.

Real Address

Synonym for physical address.

Real Mode

In real mode, programs address physical memory directly.

Register

A memory location that is part of a processor or an I/O device. In other words, it's not normal memory. Generally, each bit or set of bits within the register controls some behavior of the larger device.

Relative Addressing

An addressing mode that calculates a new address based on the position of an instruction within a program.

Ringing

Common name for the characterisitic waveform seen when a transmission line ends at a high impedance discontinuity. The signal first overshoots the target voltage, then sags below, then overshoots again—and continues this oscillating pattern with decreasing swing amplitude until finally settling at the target voltage.

RISC (Reduced Instruction Set Computer)

A type of microprocessor architecture that runs very fast by simplifying the number of its commands. PPC405 is a RISC microprocessor

Rise Time

The time it takes for a signal to rise from 10% of its total logic swing to 90% of its total logic swing.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 524 of 947

ROM Emulator

A debugging tool that takes the place of-or emulates-the ROM on the target board. A ROM emulator acts very much like a debug monitor, except that it includes its own serial or network connection to the host.

ROM Monitor

A piece of debugging code which usually communicates via a serial connection to a host computer or terminal. Also see "Debug Monitor."

Routing

The interconnection or the process of creating the desired interconnection of logic cells to make them perform the desired function. Routing follows after partitioning and placement.

RTOS (Real Time Operating System)

Also called *real-time multitasking kernel*. Software which ensures that time critical events are processed simultaneously and efficiently within a predictable response time. In general, the use of an RTOS simplifies the design process of a system by allowing the application to be divided into multiple independent tasks.

S

SAN (Storage Area Network)

A high-speed subnetwork of shared storage devices. A storage device is a machine that contains nothing but a disk or disks for storing data. A SAN's architecture works in a way that makes all storage devices available to all servers on a LAN (Local Area Network) or WAN (Wide Area Network).

Schematic

Graphic representation of a logic design in the form of interconnected gates, flip-flops, and larger blocks. Older and more visually intuitive alternative to the increasingly more popular equation-based or high-level language textual description of a logic design.

SelectMAP Interface

One of the configuration interfaces on the Virtex-II Pro device. This is a byte-serial interface. The pins in the SelectMAP interface can be used as user I/O after configuration has been completed or remain configured as a configuration interface.

SelectRAM

Xilinx-specific name for RAM implemented in CLBs.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 525 of 947

SERDES (Serializer/Deserializer)

A common name for a high-speed transciever that performs both parallel-to-serial and serial-to-parallel conversion.

Simulation

Computer modeling of logic and (sometimes) timing behavior of logic driven by simulation inputs (stimuli or vectors).

Single-Ended

Method of signaling which, unlike differential signaling, only transmits signals over one net.

Skin Effect Loss

Electrical loss in a non-ideal medium due to skin effect. Skin effect is the tendancy for high-frequency signal components to travel close to the surface of the medium.

Slice

A subdivision of the Virtex-II Pro CLB. There are four vertical slices in each Virtex-II Pro CLB. Each slice contains two Logic Cells.

SNR (Signal-to-Noise Ratio)

A measure of signal strength relative to background noise. The ratio is usually measured in decibels (dB). If the incoming signal strength in microvolts is V_S, and the noise level, also in microvolts, is V_N, then the signal-to-noise ratio, SNR, in decibels, is given by the formula:

$$\text{SNR} = 20 \log_{10}(V_S / V_N)$$

Soft IP

A synthesizable Intellectual Property which can be readily incorporated into an FPGA. Soft IP solves many of the time-to-market issues and also can simplify verification if a proper test bench is included.

Software Interrupt

An interruption of a program that is initiated by a software instruction. Software interrupts are commonly used to implement breakpoints and operating system entry points. Unlike true interrupts, they occur synchronously with respect to program execution.

SONET (Synchronous Optical NETwork)

A standard for connecting fiber-optic transmission systems. SONET was proposed by Bellcore in the mid-1980s and is now an ANSI standard.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 526 of 947

SPECint95 and SPECfp95

Acronym for Standard Performance Evaluation Corporation, a nonprofit corporation set up by many computer and microprocessor vendors to create a standard set of benchmark tests. The most widely used set of tests, known as SPEC95, results in two sets of measurements, one for integer operations (SPECint95) and one for floating-point operations (SPECfp95). The SPEC95 benchmark tests are also called CPU95 tests.

SRAM

Static random access memory. Read-Write memory with data stored in latches. Faster than DRAM and with simpler timing requirements, but smaller in size and about four times more expensive than DRAM of the same capacity.

Stack

An area of memory used to implement a data structure that follows the last in, first out method of access. The stack is usually used by the processor to keep track of subroutine calls and returns.

Stack Pointer

A special purpose register that tracks the location of the last entry in the stack.

Static Timing

Detailed description of on-chip logic and interconnect delays.

Submicron

The smallest feature size is usually expressed in microns (µ = one millionth of a meter, or a thousandth of a millimeter). The state of the art is moving from 0.35µ to 0.25µ, and soon may reach 0.18µ. For comparison purposes, the wavelength of visible light is 0.4µ to 0.8µ. One thousandth of an inch, or 1 mil, is 25.4µ.

Sync Word

A 32-bit word with a value that is used to synchronize the configuration logic.

Synchronous

Circuitry that changes state only in response to a common clock, as opposed to asynchronous circuitry that responds to a multitude of derived signals. Synchronous circuits are easier to design, debug, modify, and better tolerate parameter changes and speed upgrades than asynchronous circuits.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 527 of 947

Synthesis

Optimization process of adapting a logic design to the logic resources available on the chip, like look-up tables, Longline, and dedicated carry. Synthesis precedes mapping.

T

TBUFs

Buffers with a 3-state option, where the output can be made inactive. Used for multiplexing different data sources onto a common bus. The pulldown-only option can use the bus as a “wired AND” function.

Termination

Usually implemented with passive components, termination is used to interface drivers, receivers, and traces that have differing impedance values. Typically, device drivers and receivers do not match the impedance of the PCB trace that connects them. Termination resistors are employed to match the impedances of these components, maximizing signal transmission and reducing noise.

Timing

Relating to delays, performance, or speed.

Timing Driven

A design or layout method that takes performance requirements into consideration.

TLB (Translation Lookaside Buffer)

TLB is part of an MMU. It has a table used in a virtual memory system keeping track of the physical address page number associated with each virtual address page number. A TLB is used in conjunction with a cache whose tags are based on virtual addresses.

Trace

A PPC405 feature which supports tracing of the instruction stream being executed out of the instruction cache in real time.

Trap

1. A program interrupt, usually an interrupt caused by some exceptional situation in the user program. In most cases, the OS performs some action, then returns control to the program.

2. Internally generated exceptions that deal with such instances as arithmetic overflow, divide by zero, and bound check failure.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 528 of 947

U

UART (Universal Asynchronous Receiver/Transmitter)

An 8-bit parallel-to-serial and serial-to-parallel converter, combined with parity and start-detect circuitry, and sometimes even FIFO buffers. Used widely in asynchronous serial communications interfaces, such as modems.

UI (Unit Interval)

Unit of time corresponding to one bit period. A unit interval is the time it takes to send one bit.

USB (Universal Serial Bus)

A low-cost, low-speed, self-clocking bit-serial bus (1.5 MHz and 12 MHz) using four wires (V_{CC}, ground, differential data) to daisy-chain up to 128 devices.

User Mode

User mode restricts access to some registers and instructions. Normally, application programs operate in this mode.

V

Virtual Address

An intermediate address used to translate an effective address into a physical address. It consists of a process ID and the effective address. It is only used when address translation is enabled.

Virtual Mode

In virtual mode, programs address virtual memory and virtual-memory addresses are translated by the processor into physical-memory addresses. This allows programs to access much larger address spaces than might be implemented in the system.

VME

Older bus standard, popular with MC68000-based industrial computers.

Von-Neuman Architecture

Von-Neuman architecture has a shared bus for instruction and data access. Therefore simultaneous instruction and data transfer is not possible.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 529 of 947

W

WAN (Wide Area Network)

A computer network that spans a relatively large geographical area. Typically, a WAN consists of two or more local-area networks (LANs).

Watchdog Timer

A hardware timer that is periodically reset by software. If the software crashes or hangs, the watchdog timer will expire, and the entire system will be reset automatically

WDM (Wavelength Division Multiplexing)

A type of multiplexing developed for use on optical fiber. WDM modulates each of several data streams onto a different part of the light spectrum.

Word

Four bytes, or 32 bits.

Write Back

A Cache write policy in which data written into the cache by the CPU is not written into main memory until that data line in the cache is to be replaced.

$\overline{\text{WRITE}}$ Pin

The $\overline{\text{WRITE}}$ pin is an input to Virtex-II Pro devices in the SelectMAP/Slave Parallel mode, indicating to the device which direction data is flowing on the Data bus. When $\overline{\text{WRITE}}$ is asserted (Low), data is entering the device (configuration). When $\overline{\text{WRITE}}$ is de-asserted (High), data is leaving the device (readback). If $\overline{\text{WRITE}}$ changes state when the device isn't expecting it, an abort occurs. For more information on the $\overline{\text{WRITE}}$ pin, refer to *The Programmable Logic Data Book*, and in this User Guide, "Design Considerations," page 61.

Write Through

A Cache write policy. A technique for writing data from the CPU simultaneously into the cache and into main memory to assure coherency

X

XChecker Cable

The Xilinx XChecker Cable (model DLC4) is a serial download cable. The XChecker uses a serial 9-pin interface to the communication port of a host computer and two 8-pin headers for flying-wire connectors to a target board. The XChecker cable is supported by the Hardware Debugger software for performing Slave Serial configuration and

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 530 of 947

readback of FPGAs. The XChecker cable is also supported by the iMPACT software for performing Slave Serial and Boundary Scan configuration of FPGAs, and Boundary Scan programming of CPLDs. For more information on using the XChecker cable refer to the *Hardware Users Guide* and the *Hardware Debugger Reference/Users Guide*.

XNF File

Xilinx-proprietary description format for a logic design. Alternative is EDIF.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 531 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 532 of 947

Index

Numerics

3-state output buffer 187

A

AC coupling
  defined 497
address mapping 125
addressing modes
  defined 497
addressing scheme 125
ALU
  defined 497
ASIC
  defined 497
  Virtex-II Pro compared with 17–21, 437
asynchronous
  defined 498
ATM
  defined 498
  IP core for 267, 271
available products
  XC1700D 493

B

BER 272
  defined 498
BGN files 459
bidirectional LVDS 254
bidirectional signals 189
big endian
  defined 498
BIT files
  description 458
  disabling 465
  loading downward 468
  loading up or down 468
  loading upward 469
bit swapping
  description 467
  disabling 467
BitGen
  -b option 459
  -d option 459
  description 457
  disabling DRC 459
  DRC file 459
  encryption options 260
  -g option 459–??
  -h option 465
  input files 458
  -j option 465
  -l option 465
  -m option 465
  options 459
  output files 458
  PCF files 458
  persistence switch 338
  readback option 338
  standard bitstream 333
  syntax 458
  -w option 465
bitstream
  defined 499
  configuration 333
  data frames 334
  encryption 259–262
  loading encrypted 262
  standard 333
block SelectRAM 117–134
  defined 499
  timing model 32
  timing parameters 33
board routability 445
board support package *See*BSP 499
boundary scan
  instruction set 311
  mode 282
  models 456
Boundary Scan Description Language (BSDL) 456
boundary scan interface
  defined 499
  and readback 337
BSDL files 456
BSP 270
  defined 499
buffers
  3-state output 187
  bidirectional LVDS 254
  global clock 63
  LDT 255
  output 186
BUFGCE 76

C

cache
  defined 500
cache line
  defined 500
capacitors
  decoupling 440
cascadable shift registers 144
CCLK 281
  defined 500
  and configuration mode 282
  and master serial programming mode 298
CDR 19
  defined 500
channel bonding
  defined 500
characteristic impedance
  See impedance
characteristics
  land pads 446
checksum 468
ChipScope Pro 341
  and CoreConnect 341
classification and export considerations 260
CLB
  defined 501
clearing configuration memory 284
CLK 102
CLK2X 94
CLKDV 94
CLKFB 89
CLKIN 89
clock de-skew 83
clock networks 62–83
clocks 62
  buffer input 65
  distribution 62
  forwarding 242
  global buffers 63
  global networks 62
  multiplexer waveform 75
  multiplexers 62
  phase shifting 97
  resources 63
coherency
  defined 501
comma
  defined 501
command register (CMD) 328
commands
  file, executing 468
compiler
  defined 501
  memory 141
configuration 281
  bitstream 327
    defined 501
  bitstream header 333
  Boundary Scan mode 282
  clearing memory 284
  data frames 327

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 533 of 947

data processing flow 331
-g option 459–??
internal processing 327
JTAG 444
logic 327
Master SelectMAP mode 282
Master Serial mode 282
mode pins 281
modes 281, 282
option register (COR) 329
process 283
register writes 332
Slave SelectMAP mode 282
Slave Serial mode 282
configuration registers 327
CMD 328
COR 329
CRC 330
CTL 329
FAR 330
FDRI 330
FDRO 330
FLR 329
LOUT 330
MASK 329
STAT 330
writes 332
conflict resolution 119
constraining placement 150
content-addressable memory (CAM) 144
control register (CTL) 329
control signals 83
CORE Generator system 262–280
CoreConnect™ bus architecture
defined 502
and ChipScope Pro 341
CRC
16-bit polynomial 336
register 330
sequence 334
crosstalk 444
defined 503
CS pin
defined 503
cyclic redundancy check
See CRC

D

Data Encryption Standard (DES) 259
data frames 334
data sheets
XC18V00 Series PROMs 471
DC coupling
defined 503
DCI 216–232
I/O buffer library 223
software support 223
DCM 83, 83–116
clock de-skew 84
control signals 83
frequency synthesis 83, 93
legacy support 90
miscellaneous timing parameters 58
operating frequency ranges 55
overview 83
phase shifting 83, 97
port signals 89
timing model 55
waveforms 113
DCMs
clock de-skew 83
control signals 83
frequency synthesis 83
phase shifting 83, 97
port signals 89
waveforms 113
DCR
defined 503
and processor block timing model 60
DDR I/O 232–247
input 233
output 235
output with 3-state control 237
SDRAM 241
debugger
defined 504
hardware 465
debugging
using ChipScope Pro 341
decoupling capacitors 440
dedicated pins 281
diagrams 377, 390, 405, 411, 417, 423
DES 259
de-skew circuit 88
DESYNCH command 335
differential signaling 255
defined 504
Digital Clock Manager (DCM) 83
DIN pin
defined 504
distributed SelectRAM 134–144
DLLs
characteristics 88
source clock input 89
DONE pin
defined 505
DOUT pin
defined 505
DOUT/BUSY pin
defined 505
DRC
disabling for BitGen 459
DRC file 459
DSOCM
defined 505
See OCM: data side
DSP 20, 267, 268, 275
defined 505
dynamic read operations 145

E

EDIF 127, 139, 141, 149, 241, 265, 266
defined 506
effective address
defined 506
embedded multipliers 172
timing model 36
timing parameters 36
encryption
BitGen options 260
bitstream 259–262
ESD
defined 506
export considerations 260

F

fall time
defined 507
FDDRCPE 240
FDDRRSE 240
FF1152
bank information diagram 392, 402
composite pinout diagram 389, 401
dedicated pins diagram 390, 405
flip-chip fine-pitch BGA package 431, 432, 434, 435
FF1517
bank information diagram 408, 414, 420
composite pinout diagram 407, 413, 415, 419
dedicated pins diagram 411, 417, 423
flip-chip fine-pitch BGA package 433
FF672
bank information diagram 376
composite pinout diagram 375
dedicated pins diagram 377
fine-pitch BGA package 429
FF896
composite pinout diagram 383
fine-pitch BGA package 430
FG256
fine-pitch BGA package 426

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 534 of 947

pinouts 346
FG456
bank information diagram 364, 370
fine-pitch BGA package 427
FIFO 267
defined 507
application notes 127
generating async 117
sync and async using CORE Generator 134
fine phase adjustment 97
flip-chip advantages 436
flip-chip packages 436
frame address register (FAR) 330
Frame Data Register Input (FDRI) 330
Frame Data Register Output (FDRO) 330
frame length register (FLR) 329
frequency synthesis 83
fully synchronous shift registers 151

G

global clock buffers 63
global clock nets 62
global clocks
input to output timing parameters 51
setup and hold timing parameters 53
GTL 200
GTL+ 201

H

Hardware Debugger 465
Harvard architecture
defined 509
HDC pin
defined 509
HSTL_I 202, 206
HSTL_II 203, 207
HSTL_III 204, 208
HSTL_IV 205, 209
HyperTransport™
defined 509
See LDT

I

I/O banks 343
I/O Buffer Information Specification
See IBIS
I/O standards
single-ended 181
IBIS 451, 452
advantages 452
file structure 452
generation 452
I/V and dV/dt curves 453
ramp keyword 453
simulations 454
simulators 455
IEEE 1149.1 456
IEEE 1532 339, 456
impedance
defined 510
INIT pin
defined 510
input DDR 233
input files
BitGen 458
PROMGen 466
instruction set
defined 510
boundary scan 311
IOBs
3-state timing parameters 46
input timing parameters 39
output timing parameters 43
timing model 38
IOBUF 189
IOSTANDARD attribute 225
ISOCM
defined 511
See OCM: instruction side

J

jitter
defined 511
random
defined 519
JTAG 444
defined 512

K

keys 262
creating 260

L

land pad characteristics 446
land pads 446
LDC pin
defined 512
LDT 255
defined 512
buffers 255
implementation 255
software primitives 255
See also
HyperTransport
legacy data output register (LOUT) 330
legacy support 90
library primitives and submodules 73
Lightning Data Transport
See LDT
little endian
defined 513
LL files 459, 465
loading 262
locked output 89
logic
allocation file 465
logical address
See effective address
loopback
See RocketIO transceiver loopback
low voltage differential signaling (LVDS) 248
low voltage positive emitter-coupled logic (LVPECL) 256
LUTs 144
defined 513
as shift registers 144–154
LVCMOS15 214
LVCMOS18 214
LVCMOS25 215
LVCMOS33 215
LVDS 248–255
defined 513
3-state buffer termination 253
bidirectional 254
primitives 248
transmitter termination 252
LVPECL 256–258
primitives 256
receiver termination 257
transmitter termination 258
LVTTL 213

M

mask file 465
MASK register (MASK) 329
Master SelectMAP mode 282
Master Serial mode 282
memory
clearing 284
memory compiler program 141
MicroBlaze™ 277, 278
defined 514
MMU
defined 514
modes
configuration 282

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 535 of 947

boundary scan 282
master SelectMAP 282
master serial 282, 298
slave SelectMAP 282
slave serial 282, 299
NO_CHANGE 119
programming
See modes: configuration
READ_FIRST 119
WRITE_FIRST 118
MSK files 459
MultiLINX cable
defined 515
Multiplexers 155–166
multiplexers 155
clocks 62
large 155
primary/secondary global 66
wide-input 160
multipliers
embedded 172
Multipliers, embedded 172–179

N

National Institute of Standards and Technology (NIST) 259
NO_CHANGE mode 119

O

OBUF 186
OBUFT 187
OCM
defined 515
and processor block timing model 60
on-chip peripheral bus
See OPB
OPB
defined 516
and MicroBlaze™ 277
IP cores for 270
IP for 278
operating frequency ranges 55
optimization
defined 516
ordering information
XC1700D 493
output buffer (OBUF) 186
output DDR 235
with 3-state control 237
output drive strength 192
output files
BitGen 458
name, PROMGen 469
overwriting 465
PROMGen 466
output power/ground pairs 194
overshoot
defined 516
overview of user guide 13

P

package specifications 425
FF1152 431, 432, 434, 435
FF1517 433
FF672 429
FF896 430
FG256 426
FG456 427
packages
flip-chip 436
thermal considerations 436
packets 334
data 335
headers 335
pads 446
defined 516
Parallel Cable IV
defined 516
parallel termination 442
PC20-84 specification 472
PCB layout considerations 439
PCF files
BitGen 458
PCI
defined 517
PCI33_3 213
PCI66_3 213
persist option 282
phase shifting 83, 97
physical address
defined 517
pin-locking
defined 517
pinout diagrams 355
pinout information 343
pins 281
chip enable
See CS Pin 503
CS
defined 503
dedicated 281
DIN
defined 504
DONE
defined 505
DOUT
defined 505
DOUT/BUSY
defined 505
dual-function 282
HDC
defined 509
INIT
defined 510
LDC
defined 512
power 284
PROGRAM
defined 519
types 344
WRITE
defined 526
pin-to-pin timing model 50
placement
constraints 150
defined 517
PLB
defined 517
port addressing scheme 125
port signals 89
power analysis software 451
power pins 284
PowerPC 405 processor block
timing model 60
pre-emphasis
defined 518
primitives
LVDS 248, 256
PRM files 467
PROGRAM pin
defined 519
PROMGen
-b option 467
-c option 468
-d option 468
description 465, 466
examples 470
flow diagram 465
-help option 468
input files 466
-l option 468
-n option 468
-o option 469
options 467
output file name 469
output files 466
-p option 469
-r option 469
-s option 469
supported families 465
-u option 469
-x option 469
PROMs
bit swapping 467
data sheet 471
files, description 467
formats 469
loading files 469
multiple files 469
package specifications 471

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 536 of 947

sizes 469

R

rawbits file 459
RBT files 459
read operations
dynamic 145
static 146
READ_FIRST mode 119
readback 337
defined 519
capture 337
enabling in software 338
IEEE 1532 flow 339
regular flow 339
verification 337
with Boundary Scan 339
register
defined 520
registers
configuration 327
ringing
defined 520
on PC board signals 442
rise time
defined 520
RocketIO transceiver
loopback
defined 513
timing model 60
routability guidelines 445
routing
defined 521
challenges 445
strategy 446
RST 89

S

SelectIO-Ultra
single-ended resources 180–215
SelectMAP
See configuration modes
SERDES
defined 522
series termination 443
shift registers
cascadable 144
fully synchronous 151
operation 144
static length 152
signals
bidirectional 189
simulation 20, 113, 122
defined 522
simultaneous switching output (SSO) 194
single-ended
defined 522
I/O standards 181
SelectIO-Ultra resources 180–215
Slave SelectMAP mode 282
Slave Serial mode 282
slew rate 192
slices 166
defined 522
SO20 specification 473
solder balls 445
specifications
PC20-84 472
PROM packages 471
SO20 473
VQ44 474
SRL16 144
SRLC16 144
SSTL2_I 210
SSTL2_II 211, 212
standard bitstream 333
start-up sequence 335
STARTUP_WAIT attribute 89
static length shift registers 152
static read operations 146
status register (STAT) 330
Sum of Products (SOP) 166–172
synchronous
defined 523
synchronous DRAM 241

T

TBUFs
defined 524
termination
defined 524
parallel 442
series 443
techniques 193
thermal considerations 436
thermal management 438
Timing Analyzer 23
timing models 23
block SelectRAM 32
DCM 55
embedded multiplier 36
IOB 38
pin-to-pin 50
PPC405 60
RocketIO MGT 60
timing parameters
block SelectRAM 33
embedded multiplier 36
general slice 25
global clock input to output 51
global clock setup and hold 53
IOB 3-state 46
IOB input 39
IOB output 43
miscellaneous DCM 58
slice distributed RAM 28
slice SRL 31
TMULT 36
transmission line effects 193, 441
TRCE 23
Triple Data Encryption Algorithm (TDEA) 259
Triple DES 259

V

VBATT 262
VCC decoupling 439
VCCO 193
verification
using ChipScope Pro 341
VHDL and Verilog templates 109, 128, 137, 142, 153, 162, 168, 178, 242
Virtex-II Pro
compared with ASIC 17–21, 437
DCI 216–232
DES 259
LUTs 144
multiplexers 155
package specifications 425
pinout diagrams 355
pinouts 343
slices 166
VQ44 specification 474
VREF 192

W

wide-input multiplexers 160
WRITE pin
defined 526
WRITE_FIRST mode 118

X

XC18V00 Series PROMs 471

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 537/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 537 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 538 of 947

Xilinx Sales Offices

Headquarters

2100 Logic Drive
San Jose, CA 95124

Tel: (408) 559-7778
Fax: (408) 559-7114
TWX: (510) 600-8750

North America

Madison, AL
Tel: (256) 722-4050
Fax: (256) 722-9912

Phoenix, AZ
Tel: (480) 753-4503
Fax: (480) 753-4504

Irvine, CA
Tel: (949) 727-0780
Fax: (949) 727-3128

San Diego, CA
Tel: (858) 558-5974
Fax: (858) 558-6418

Sunnyvale, CA
Tel: (408) 245-9850
Fax: (408) 245-9865

Greenwood Village, CO
Tel: (303) 220-7541
Fax: (303) 220-8641

Winter Park, FL
Tel: (407) 673-8661
Fax: (407) 673-8663

Schaumburg, IL
Tel: (847) 605-1972
Fax: (847) 605-1976

Deephaven, MN
Tel: (612) 473-4816
Fax: (612) 473-5060

Marriottsville, MD
Tel: (410) 442-9748
Fax: (410) 442-9749

Nashua, NH
Tel: (603) 891-1098
Fax: (603) 891-0890

Ledgewood, NJ
Tel: (973) 584-7199
Fax: (973) 584-1390

Raleigh, NC
Tel: (919) 846-3922
Fax: (919) 846-8316

Brecksfield, OH
Tel: (330) 659-3131
Fax: (330) 659-9254

Portland, OR
Tel: (503) 293-9016
Fax: (503) 293-3858

West Chester, PA
Tel: (610) 430-3300
Fax: (610) 430-0470

Dallas, TX
Tel: (972) 960-1043
Fax: (972) 960-0927

Salt Lake City, UT
Tel: (801) 268-3434
Fax: (801) 266-9021

Bellevue, WA
Tel: (425) 451-7000
Fax: (425) 990-8989

Oakville, Ontario Canada
Tel: (905) 337-0894
Fax: (905) 337-3554

Kanata, Ontario Canada
Tel: (613) 271-5264
Fax: (613) 592-4256

European Headquarters

Benchmark House, 203 Brooklands Rd.
Weybridge Surrey KT13 0RH
United Kingdom

Tel: +44-1-870-7350-600
Fax: +44-1-870-7350-601

Benelux
Tel : +32-53-848310
Fax: +32-53-848311

France and Spain
Tel: +33-1-34-63-01-01
Fax: +33-1-34-63-01-09

Germany, Switzerland, and Austria
Tel: +49-89-93088-0
Fax: +49-89-93088-188

Italy
Tel: +39-02-487-12-101
Fax: +39-02-400-94-700

Sweden, Norway, Denmark, and Finland
Tel: +46-8-594-61-660
Fax: +46-8-594-61-661

United Kingdom and Ireland
Tel: +44-870-7350-603
Fax: +44-870-7350-604

Japan

Tel: +81-3-5321-7711
Fax: +81-3-5321-7765

Asia Pacific Headquarters

Tel: +852-2-424-5200
Fax: +852-2-494-7159

Korea
Tel : +822-761-4277
Fax : +822-761-4278

Shanghai
Tel: +86-21-6886-2323, 2322
Fax: +86-21-6886-2333

Taiwan
Tel: +886-2-2174-1388
Fax: +886-2-2758-8367

For information on Xilinx North American Sales Representative offices, see
http://www.xilinx.com/company/sales/na_reps.htm

For information on Xilinx International Sales Representative offices, see
http://www.xilinx.com/company/sales/int_reps.htm

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 539 of 947

https://web.archive.org/web/20030702075253/http://www.xilinx.com:80/publications/products/v2pro/ds_pdf/ds083.pdf

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Virtex-II Pro™ Platform FPGAs: Introduction and Overview

DS083-1 (v2.4.1) March 24, 2003

Advance Product Specification

Summary of Virtex-II Pro Features

- High-Performance Platform FPGA Solution, Including
  - Up to twenty-four RocketIO™ embedded multi-gigabit transceivers
  - Up to four IBM® PowerPC® RISC processor blocks
- Based on Virtex™-II Platform FPGA Technology
  - Flexible logic resources
  - SRAM-based in-system configuration
  - Active Interconnect technology
  - SelectRAM™+ memory hierarchy
  - Dedicated 18-bit x 18-bit multiplier blocks
  - High-performance clock management circuitry
  - SelectI/O™-Ultra technology
  - XCITE Digitally Controlled Impedance (DCI) I/O

Virtex-II Pro family members and resources are shown in Table 1.

Table 1: **Virtex-II Pro FPGA Family Members**

Device	RocketIO Transceiver Blocks	PowerPC Processor Blocks	Logic Cells(1)	CLB (1 = 4 slices = max 128 bits)		18 X 18 Bit Multiplier Blocks	Block SelectRAM+		DCMs	Maximum User I/O Pads
				Slices	Max Distr RAM (Kb)		18 Kb Blocks	Max Block RAM (Kb)		
XC2VP2	4	0	3,168	1,408	44	12	12	216	4	204
XC2VP4	4	1	6,768	3,008	94	28	28	504	4	348
XC2VP7	8	1	11,088	4,928	154	44	44	792	4	396
XC2VP20	8	2	20,880	9,280	290	88	88	1,584	8	564
XC2VP30	8	2	30,816	13,696	428	136	136	2,448	8	644
XC2VP40	0(2) or 12	2	43,632	19,392	606	192	192	3,456	8	804
XC2VP50	0(2) or 16	2	53,136	23,616	738	232	232	4,176	8	852
XC2VP70	16 or 20	2	74,448	33,088	1,034	328	328	5,904	8	996
XC2VP100	0(2) or 20	2	99,216	44,096	1,378	444	444	7,992	12	1,164
XC2VP125	0(2), 20, or 24	4	125,136	55,616	1,738	556	556	10,008	12	1,200

Notes:
1. Logic Cell = (1) 4-input LUT + (1)FF + Carry Logic
2. These devices can be ordered in a configuration without RocketIO transceivers. See Table 3 for package configurations.

RocketIO Transceiver Features

- Full-Duplex Serial Transceiver (SERDES) Capable of Baud Rates from 600 Mb/s to 3.125 Gb/s
- 120 Gb/s Duplex Data Rate (24 Channels)
- Monolithic Clock Synthesis and Clock Recovery (CDR)
- Fibre Channel, 10G Fibre Channel, Gigabit Ethernet, 10 Gb Attachment Unit Interface (XAUI), and Infiniband-Compliant Transceivers
- 8-, 16-, or 32-bit Selectable Internal FPGA Interface
- 8B/10B Encoder and Decoder (optional)
- 50Ω/75Ω on-chip Selectable Transmit and Receive Terminations
- Programmable Comma Detection
- Channel Bonding Support (from 2 to 24 Channels)
- Rate Matching via Insertion/Deletion Characters
- Four Levels of Selectable Pre-Emphasis
- Five Levels of Output Differential Voltage
- Per-Channel Internal Loopback Modes
- 2.5V Transceiver Supply Voltage

© 2003 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 541 of 947

PowerPC RISC Block Features

- Embedded 300+ MHz Harvard Architecture Block
- Low Power Consumption: 0.9 mW/MHz
- Five-Stage Data Path Pipeline
- Hardware Multiply/Divide Unit
- Thirty-Two 32-bit General Purpose Registers
- 16 KB Two-Way Set-Associative Instruction Cache
- 16 KB Two-Way Set-Associative Data Cache
- Memory Management Unit (MMU)
  - 64-entry unified Translation Look-aside Buffers (TLB)
  - Variable page sizes (1 KB to 16 MB)
- Dedicated On-Chip Memory (OCM) Interface
- Supports IBM CoreConnect™ Bus Architecture
- Debug and Trace Support
- Timer Facilities

Virtex-II Pro Platform FPGA Technology

- SelectRAM+ Memory Hierarchy
  - Up to 10 Mb of True Dual-Port RAM in 18 Kb block SelectRAM+ resources
  - Up to 1,738 Kb of distributed SelectRAM+ resources
  - High-performance interfaces to external memory
- Arithmetic Functions
  - Dedicated 18-bit x 18-bit multiplier blocks
  - Fast look-ahead carry logic chains
- Flexible Logic Resources
  - Up to 111,232 internal registers/latches with Clock Enable
  - Up to 111,232 look-up tables (LUTs) or cascadable variable (1 to 16 bits) shift registers
  - Wide multiplexers and wide-input function support
  - Horizontal cascade chain and Sum-of-Products support
  - Internal 3-state busing
- High-Performance Clock Management Circuitry
  - Up to twelve Digital Clock Manager (DCM) modules
    - Precise clock de-skew
    - Flexible frequency synthesis
    - High-resolution phase shifting
  - 16 global clock multiplexer buffers in all parts
- Active Interconnect Technology
  - Fourth-generation segmented routing structure
  - Fast, predictable routing delay, independent of fanout
  - Deep sub-micron noise immunity benefits
- SelectIO™-Ultra Technology
  - Up to 1,200 user I/Os
  - Twenty-two single-ended standards and six differential standards
  - Programmable LVCMOS sink/source current (2 mA to 24 mA) per I/O
  - XCITE Digitally Controlled Impedance (DCI) I/O
  - PCI / PCI-X support (1)
  - Differential signaling
    - 840 Mb/s Low-Voltage Differential Signaling I/O (LVDS) with current mode drivers
    - Bus LVDS I/O
    - HyperTransport (LDT) I/O with current driver buffers
    - Built-in DDR input and output registers
  - Proprietary high-performance SelectLink technology for communications between Xilinx devices
    - High-bandwidth data path
    - Double Data Rate (DDR) link
    - Web-based HDL generation methodology
- SRAM-Based In-System Configuration
  - Fast SelectMAP™ configuration
  - Triple Data Encryption Standard (DES) security option (bitstream encryption)
  - IEEE 1532 support
  - Partial reconfiguration
  - Unlimited reprogrammability
  - Readback capability
- Supported by Xilinx Foundation™ and Alliance Series™ Development Systems
  - Integrated VHDL and Verilog design flows
  - ChipScope™ Integrated Logic Analyzer
- 0.13 µm Nine-Layer Copper Process with 90 nm High-Speed Transistors
- 1.5V (V_{CCINT}) core power supply, dedicated 2.5V V_{CCAUX} auxiliary and V_{CCO} I/O power supplies
- IEEE 1149.1 Compatible Boundary-Scan Logic Support
- Flip-Chip and Wire-Bond Ball Grid Array (BGA) Packages in Standard 1.00 mm Pitch
- Each Device 100% Factory Tested

General Description

The Virtex-II Pro family contains platform FPGAs for designs that are based on IP cores and customized modules. The family incorporates multi-gigabit transceivers and PowerPC CPU blocks in Virtex-II Pro Series FPGA architecture. It empowers complete solutions for telecommunication, wireless, networking, video, and DSP applications.

The leading-edge 0.13 µm CMOS nine-layer copper process and Virtex-II Pro architecture are optimized for high performance designs in a wide range of densities. Combining a wide variety of flexible features and IP cores, the Virtex-II Pro family enhances programmable logic design capabilities and is a powerful alternative to mask-programmed gate arrays.

1. Refer to **XAPP653** for more information.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 542 of 947

Architecture

Virtex-II Pro Array Overview

Virtex-II Pro devices are user-programmable gate arrays with various configurable elements and embedded blocks optimized for high-density and high-performance system designs. Virtex-II Pro devices implement the following functionality:

- Embedded high-speed serial transceivers enable data bit rate up to 3.125 Gb/s per channel.
- Embedded IBM PowerPC 405 RISC processor blocks provide performance of 300+ MHz.
- SelectIO-Ultra blocks provide the interface between package pins and the internal configurable logic. Most popular and leading-edge I/O standards are supported by the programmable IOBs.
- Configurable Logic Blocks (CLBs) provide functional elements for combinatorial and synchronous logic, including basic storage elements. BUFTs (3-state buffers) associated with each CLB element drive dedicated segmentable horizontal routing resources.
- Block SelectRAM+ memory modules provide large 18 Kb storage elements of True Dual-Port RAM.
- Embedded multiplier blocks are 18-bit x 18-bit dedicated multipliers.
- Digital Clock Manager (DCM) blocks provide self-calibrating, fully digital solutions for clock distribution delay compensation, clock multiplication and division, and coarse- and fine-grained clock phase shifting.

A new generation of programmable routing resources called Active Interconnect Technology interconnects all of these elements. The general routing matrix (GRM) is an array of routing switches. Each programmable element is tied to a switch matrix, allowing multiple connections to the general routing matrix. The overall programmable interconnection is hierarchical and designed to support high-speed designs.

All programmable elements, including the routing resources, are controlled by values stored in static memory cells. These values are loaded in the memory cells during configuration and can be reloaded to change the functions of the programmable elements.

Virtex-II Pro Features

This section briefly describes Virtex-II Pro features. For more details, refer to Virtex-II Pro™ Platform FPGAs: Functional Description.

RocketIO Multi-Gigabit Transceivers

The RocketIO Multi-Gigabit Transceiver, based on Mindspeed's SkyRail technology, is a flexible parallel-to-serial and serial-to-parallel embedded transceiver used for high-bandwidth interconnection between buses, backplanes, or other subsystems.

Multiple user instantiations in an FPGA are possible, providing up to 120 Gb/s of full-duplex raw data transfer. Each channel can be operated at a maximum data transfer rate of 3.125 Gb/s.

Each RocketIO transceiver implements:

- Serializer and deserializer (SERDES)
- Monolithic clock synthesis and clock recovery (CDR)
- Fibre Channel, 10G Fibre Channel, Gigabit Ethernet, XAUI, and Infiniband-compliant transceivers
- 8-, 16-, or 32-bit selectable FPGA interface
- 8B/10B encoder and decoder with bypassing option on each channel
- Channel bonding support (2 to 24 channels)
  - Elastic buffers for inter-chip deskewing and channel-to-channel alignment
- Receiver clock recovery tolerance of up to 75 non-transitioning bits
- 50Ω /75Ω on-chip selectable transmit and receive terminations
- Programmable comma detection
- Rate matching via insertion/deletion characters
- Automatic lock-to-reference function
- Optional transmit and receive data inversion
- Four levels of pre-emphasis support
- Per-channel serial and parallel transmitter-to-receiver internal loopback modes
- Cyclic Redundancy Check (CRC) support

PowerPC 405 Processor Block

The PPC405 RISC CPU can execute instructions at a sustained rate of one instruction per cycle. On-chip instruction and data cache reduce design complexity and improve system throughput.

The PPC405 features include:

- PowerPC RISC CPU
  - Implements the PowerPC User Instruction Set Architecture (UISA) and extensions for embedded applications
  - Thirty-two 32-bit general purpose registers (GPRs)
  - Static branch prediction
  - Five-stage pipeline with single-cycle execution of most instructions, including loads/stores
  - Unaligned and aligned load/store support to cache, main memory, and on-chip memory
  - Hardware multiply/divide for faster integer arithmetic (4-cycle multiply, 35-cycle divide)
  - Enhanced string and multiple-word handling
  - Big/little endian operation support
- Storage Control
  - Separate instruction and data cache units, both two-way set-associative and non-blocking

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 543/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 543 of 947

- Eight words (32 bytes) per cache line
- 16 KB array Instruction Cache Unit (ICU), 16 KB array Data Cache Unit (DCU)
- Operand forwarding during instruction cache line fill
- Copy-back or write-through DCU strategy
- Doubleword instruction fetch from cache improves branch latency

- Virtual mode memory management unit (MMU)
  - Translation of the 4 GB logical address space into physical addresses
  - Software control of page replacement strategy
  - Supports multiple simultaneous page sizes ranging from 1 KB to 16 MB
- OCM controllers provide dedicated interfaces between Block SelectRAM+ memory and processor block instruction and data paths for high-speed access
- PowerPC timer facilities
  - 64-bit time base
  - Programmable interval timer (PIT)
  - Fixed interval timer (FIT)
  - Watchdog timer (WDT)
- Debug Support
  - Internal debug mode
  - External debug mode
  - Debug Wait mode
  - Real Time Trace debug mode
  - Enhanced debug support with logical operators
  - Instruction trace and trace-back support
  - Forward or backward trace
- Two hardware interrupt levels support
- Advanced power management support

Input/Output Blocks (IOBs)

IOBs are programmable and can be categorized as follows:

- Input block with an optional single data rate (SDR) or double data rate (DDR) register
- Output block with an optional SDR or DDR register and an optional 3-state buffer to be driven directly or through an SDR or DDR register
- Bidirectional block (any combination of input and output configurations)

These registers are either edge-triggered D-type flip-flops or level-sensitive latches.

IOBs support the following single-ended I/O standards:

- LVTTL, LVCMOS (3.3V, 2.5V, 1.8V, and 1.5V)
- PCI-X compatible (133 MHz and 66 MHz) at 3.3V(1)
- PCI compliant (66 MHz and 33 MHz) at 3.3V(1)
- GTL and GTLP
- HSTL (1.5V and 1.8V, Class I, II, III, and IV)
- SSTL (1.8V and 2.5V, Class I and II)

1. Refer to **XAPP653** for more information.

The DCI I/O feature automatically provides on-chip termination for each single-ended I/O standard.

The IOB elements also support the following differential signaling I/O standards:

- LVDS and Extended LVDS (2.5V)
- BLVDS (Bus LVDS)
- ULVDS
- LDT
- LVPECL (2.5V)

Two adjacent pads are used for each differential pair. Two or four IOB blocks connect to one switch matrix to access the routing resources.

Configurable Logic Blocks (CLBs)

CLB resources include four slices and two 3-state buffers. Each slice is equivalent and contains:

- Two function generators (F & G)
- Two storage elements
- Arithmetic logic gates
- Large multiplexers
- Wide function capability
- Fast carry look-ahead chain
- Horizontal cascade chain (OR gate)

The function generators F & G are configurable as 4-input look-up tables (LUTs), as 16-bit shift registers, or as 16-bit distributed SelectRAM+ memory.

In addition, the two storage elements are either edge-triggered D-type flip-flops or level-sensitive latches.

Each CLB has internal fast interconnect and connects to a switch matrix to access general routing resources.

Block SelectRAM+ Memory

The block SelectRAM+ memory resources are 18 Kb of True Dual-Port RAM, programmable from 16K x 1 bit to 512 x 36 bit, in various depth and width configurations. Each port is totally synchronous and independent, offering three "read-during-write" modes. Block SelectRAM+ memory is cascadable to implement large embedded storage blocks. Supported memory configurations for dual-port and single-port modes are shown in Table 2.

Table 2: **Dual-Port and Single-Port Configurations**

16K x 1 bit	4K x 4 bits	1K x 18 bits
8K x 2 bits	2K x 9 bits	512 x 36 bits

18 X 18 Bit Multipliers

A multiplier block is associated with each SelectRAM+ memory block. The multiplier block is a dedicated 18 x 18-bit 2s complement signed multiplier, and is optimized for operations based on the block SelectRAM+ content on one port. The 18 x 18 multiplier can be used independently of the block SelectRAM+ resource.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 544 of 947

Read/multiply/accumulate operations and DSP filter structures are extremely efficient.

Both the SelectRAM+ memory and the multiplier resource are connected to four switch matrices to access the general routing resources.

Global Clocking

The DCM and global clock multiplexer buffers provide a complete solution for designing high-speed clock schemes.

Up to twelve DCM blocks are available. To generate deskewed internal or external clocks, each DCM can be used to eliminate clock distribution delay. The DCM also provides 90-, 180-, and 270-degree phase-shifted versions of its output clocks. Fine-grained phase shifting offers high-resolution phase adjustments in increments of $^1/_{256}$ of the clock period. Very flexible frequency synthesis provides a clock output frequency equal to a fractional or integer multiple of the input clock frequency. For exact timing parameters, see Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics.

Virtex-II Pro devices have 16 global clock MUX buffers, with up to eight clock nets per quadrant. Each clock MUX buffer can select one of the two clock inputs and switch glitch-free from one clock to the other. Each DCM can send up to four of its clock outputs to global clock buffers on the same edge. Any global clock pin can drive any DCM on the same edge.

Routing Resources

The IOB, CLB, block SelectRAM+, multiplier, and DCM elements all use the same interconnect scheme and the same access to the global routing matrix. Timing models are shared, greatly improving the predictability of the performance of high-speed designs.

There are a total of 16 global clock lines, with eight available per quadrant. In addition, 24 vertical and horizontal long lines per row or column, as well as massive secondary and local routing resources, provide fast interconnect. Virtex-II Pro buffered interconnects are relatively unaffected by net fanout, and the interconnect layout is designed to minimize crosstalk.

Horizontal and vertical routing resources for each row or column include:

- 24 long lines
- 120 hex lines
- 40 double lines
- 16 direct connect lines (total in all four directions)

Boundary Scan

Boundary-scan instructions and associated data registers support a standard methodology for accessing and configuring Virtex-II Pro devices, complying with IEEE standards 1149.1 and 1532. A system mode and a test mode are implemented. In system mode, a Virtex-II Pro device will continue to function while executing non-test boundary-scan instructions. In test mode, boundary-scan test instructions control the I/O pins for testing purposes. The Virtex-II Pro Test Access Port (TAP) supports BYPASS, PRELOAD, SAMPLE, IDCODE, and USERCODE non-test instructions. The EXTEST, INTEST, and HIGHZ test instructions are also supported.

Configuration

Virtex-II Pro devices are configured by loading the bitstream into internal configuration memory using one of the following modes:

- Slave-serial mode
- Master-serial mode
- Slave SelectMAP mode
- Master SelectMAP mode
- Boundary-Scan mode (IEEE 1532)

A Data Encryption Standard (DES) decryptor is available on-chip to secure the bitstreams. One or two triple-DES key sets can be used to optionally encrypt the configuration data.

The Xilinx System Advanced Configuration Enviornment (System ACE) family offers high-capacity and flexible solution for FPGA configuration as well as program/data storage for the processor. See **DS080**, *System ACE CompactFlash Solution* for more information.

Readback and Integrated Logic Analyzer

Configuration data stored in Virtex-II Pro configuration memory can be read back for verification. Along with the configuration data, the contents of all flip-flops/latches, distributed SelectRAM+, and block SelectRAM+ memory resources can be read back. This capability is useful for real-time debugging.

The Xilinx ChipScope Integrated Logic Analyzer (ILA) cores and Integrated Bus Analyzer (IBA) cores, along with the ChipScope Pro Analyzer software, provide a complete solution for accessing and verifying user designs within Virtex-II Pro devices.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 545/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 545 of 947

IP Core and Reference Support

Intellectual Property is part of the Platform FPGA solution. In addition to the existing FPGA fabric cores, the list below shows some of the currently available hardware and software intellectual properties specially developed for Virtex-II Pro by Xilinx. Each IP core is modular, portable, Real-Time Operating System (RTOS) independent, and CoreConnect compatible for ease of design migration. Refer to **www.xilinx.com/ipcenter** for the latest and most complete list of cores.

Hardware Cores

- Bus Infrastructure cores (arbiters, bridges, and more)
- Memory cores (DDR, Flash, and more)
- Peripheral cores (UART, IIC, and more)
- Networking cores (ATM, Ethernet, and more)

Software Cores

- Boot code
- Test code
- Device drivers
- Protocol stacks
- RTOS integration
- Customized board support package

Virtex-II Pro Device/Package Combinations and Maximum I/Os

Offerings include ball grid array (BGA) packages with 1.0 mm pitch. In addition to traditional wire-bond interconnects, flip-chip interconnect is used in some of the BGA offerings. The use of flip-chip interconnect offers more I/Os than are possible in wire-bond versions of the similar packages. Flip-chip construction offers the combination of high pin count and excellent power dissipation.

The Virtex-II Pro device/package combination table (Table 3) details the maximum number of user I/Os and RocketIO transceivers for each device and package using wire-bond or flip-chip technology.

- FG denotes Wirebond fine-pitch BGA (1.00 mm pitch).
- FF denotes FlipChip fine-pitch BGA (1.00 mm pitch).

The FF1148 and FF1696 packages have no RocketIO transceivers bonded out. Extra SelectIO-Ultra resources occupy available pins in these packages, resulting in a higher user I/O count. FF1148 and FF1696 packages are available for the XC2VP40, XC2VP50, XC2VP100, and XC2VP125 devices only.

The I/Os per package count includes all user I/Os except the 15 control pins (CCLK, DONE, M0, M1, M2, PROG_B, PWRDWN_B, TCK, TDI, TDO, TMS, HSWAP_EN, DXN, DXP, and RSVD), VBATT, and RocketIO transceiver pins.

Table 3: **Virtex-II Pro Device/Package Combinations and Maximum Number of Available I/Os**

Pkg	Pitch (mm)	Size (mm)	Available User I/Os / Available RocketIO Transceivers									
			XC2VP2	XC2VP4	XC2VP7	XC2VP20	XC2VP30	XC2VP40	XC2VP50	XC2VP70	XC2VP100	XC2VP125
FG256	1.00	17 x 17	140 / 4	140 / 4								
FG456	1.00	23 x 23	156 / 4	248 / 4	248 / 8							
FG676	1.00	26 x 26				404 / 8	416 / 8	416 / 8				
FF672	1.00	27 x 27	204 / 4	348 / 4	396 / 8							
FF896	1.00	31 x 31			396 / 8	556 / 8	556 / 8					
FF1152	1.00	35 x 35				564 / 8	644 / 8	692 / 12	692 / 16			
FF1148	1.00	35 x 35						804 / 0(1)	812 / 0(1)			
FF1517	1.00	40 x 40							852 / 16	964 / 16		
FF1704	1.00	42.5 x 42.5								996 / 20	1,040 / 20	1,040 / 20
FF1696	1.00	42.5 x 42.5									1,164 / 0(1)	1,200 / 0(1)

Notes:
1. The RocketIO transceivers in devices in the FF1148 and FF1696 packages are not bonded out to the package pins.
2. Consult Xilinx for package options supporting 24 RocketIO transceivers.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 546 of 947

Maximum Performance

Maximum RocketIO transceiver and PowerPC processor block performance varies, depending on the package style and speed grade. See Table 4 for details. Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics contains the rest of the FPGA fabric performance parameters.

Table 4: **Maximum RocketIO Transceiver and Processor Block Performance**

	Speed Grade			Units
	-7	-6	-5	
RocketIO Transceiver Wirebond (FG)	2.5	2.5	2.0	Gb/s
RocketIO Transceiver FlipChip (FF)	3.125	3.125	2.0	Gb/s
PowerPC Processor Block	400	350	300	MHz

Virtex-II Pro Ordering Information

Virtex-II Pro ordering information is shown in Figure 1.

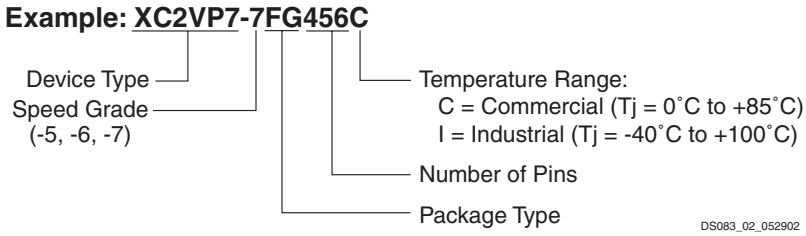


Figure 1: **Virtex-II Pro Ordering Information**

Revision History

This section records the change history for this module of the data sheet.

Date	Version	Revision
01/31/02	1.0	Initial Xilinx release.
06/13/02	2.0	New Virtex-II Pro family members. New timing parameters per speedsfile **v1.62**.
09/03/02	2.1	Updates to Table 1 and Table 3. Processor Block information added to Table 4.
09/27/02	2.2	In Table 1, correct max number of XC2VP30 I/Os to 644.
11/20/02	2.3	Add bullet items for 3.3V I/O features.
01/20/03	2.4	• In Table 3, add FG676 package option for XC2VP20, XC2VP30, and XC2VP40. • Remove FF1517 package option for XC2VP40.
03/24/03	2.4.1	• Correct number of single-ended I/O standards from 19 to 22. • Correct minimum RocketIO serial speed from 622 Mbps to 600 Mbps.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 547/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 547 of 947

Virtex-II Pro Data Sheet

The Virtex-II Pro Data Sheet contains the following modules:

- Virtex-II Pro™ Platform FPGAs: Introduction and Overview (Module 1)
- Virtex-II Pro™ Platform FPGAs: Functional Description (Module 2)
- Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)
- Virtex-II Pro™ Platform FPGAs: Pinout Information (Module 4)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 548 of 947

Virtex-II Pro Array Functional Description

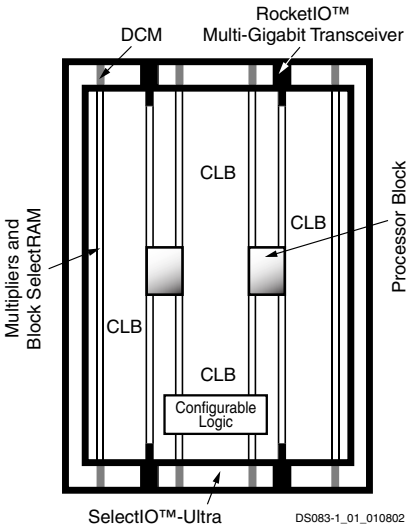


Figure 1: **Virtex-II Pro Generic Architecture Overview**

This module describes the following Virtex-II Pro functional components, as shown in Figure 1:

- Embedded RocketIO™ Multi-Gigabit Transceiver (MGT)
- Processor block with embedded IBM® PowerPC™ 405 RISC CPU core (PPC405) and integration circuitry.
- FPGA fabric based on Virtex-II architecture.

For a description of PPC405 embedded core programming models and internal core operations, refer to the ***PowerPC Processor Reference Guide*** and the ***PowerPC 405 Processor Block Reference Guide***. For detailed RocketIO transceiver digital/ analog design considerations, refer to ***RocketIO Transceiver User Guide***. For a detailed description of the FPGA fabric (CLB, IOB, DCM, etc.), refer to the ***Virtex-II Pro Platform FPGA User Guide***.

All of the documents above, as well as a complete listing and description of Xilinx-developed Intellectual Property cores for Virtex-II Pro, are available on the Xilinx website at **www.xilinx.com/virtex2pro**.

Virtex-II Pro Compared to Virtex-II Devices

Virtex-II Pro devices are built on the Virtex-II FPGA architecture. Most FPGA features are identical to Virtex-II devices. Differences are described below:

- The Virtex-II Pro FPGA family is the first to incorporate embedded PPC405 cores and RocketIO MGTs.
- V_{CCAUX}, the auxiliary supply voltage, is 2.5V instead of 3.3V as for Virtex-II devices. Advanced processing at 0.13 µm has resulted in a smaller die, faster speed, and lower power consumption.
- Virtex-II Pro devices are neither bitstream-compatible nor pin-compatible with Virtex-II devices. However, Virtex-II designs can be compiled into Virtex-II Pro devices.
- SSTL3, AGP-2X/AGP, LVPECL_33, LVDS_33, and LVDSEXT_33 standards are not supported.
- The open-drain output pin TDO does not have an internal pullup resistor.

Functional Description: RocketIO Multi-Gigabit Transceiver (MGT)

This section summarizes the features of the RocketIO multi-gigabit transceiver. For an in-depth discussion of the RocketIO MGT, including digital and analog design considerations, refer to the ***RocketIO Transceiver User Guide***.

Overview

The embedded RocketIO multi-gigabit transceiver is based on Mindspeed's SkyRail™ technology. Up to twenty-four transceivers are available. The transceiver is designed to operate at any baud rate in the range of 622 Mb/s to 3.125 Gb/s per channel. This includes specific baud rates used by various standards as listed in Table 1.

Table 1: **Protocols Supported by RocketIO Transceiver**

Protocol	Channels (Lanes)	I/O Baud Rate (Gb/s)	Reference Clock Rate (MHz)
Fibre Channel	1	1.06	53
		2.12	106
		3.1875 (1)	159.375
Gigabit Ethernet	1	1.25	62.5
10Gbit Ethernet	4	3.125	156.25
Infiniband	1, 4, 12	2.5	125
Aurora	1, 2, 3, 4, ...	0.840 – 3.125	42.00 – 156.25
Custom Protocol	1, 2, 3, 4, ...	up to 3.125	up to 156.25

Notes:
1. Virtex-II Pro MGT can support the 10G Fibre Channel data rates of 3.1875 Gb/s across 6" of standard FR-4 PCB and one connector (Molex 74441 or equivalent) with a bit error rate of 10^{-12} or better.

© 2003 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 549 of 947

The serial bit rate need not be configured in the transceiver, as the operating frequency is implied by the received data and reference clock applied.

The RocketIO transceiver consists of the Physical Media Attachment (PMA) and Physical Coding Sublayer (PCS). The PMA contains the serializer and deserializer. The PCS contains the bypassable 8B/10B encoder/ decoder, elastic buffers, and Cyclic Redundancy Check (CRC) units. The encoder and decoder handle the 8B/10B coding scheme. The elastic buffers support the clock correction (rate matching) and channel bonding features. The CRC units perform CRC generation and checking.

Figure 2 shows a high-level block diagram of the RocketIO transceiver and its FPGA interface signals.

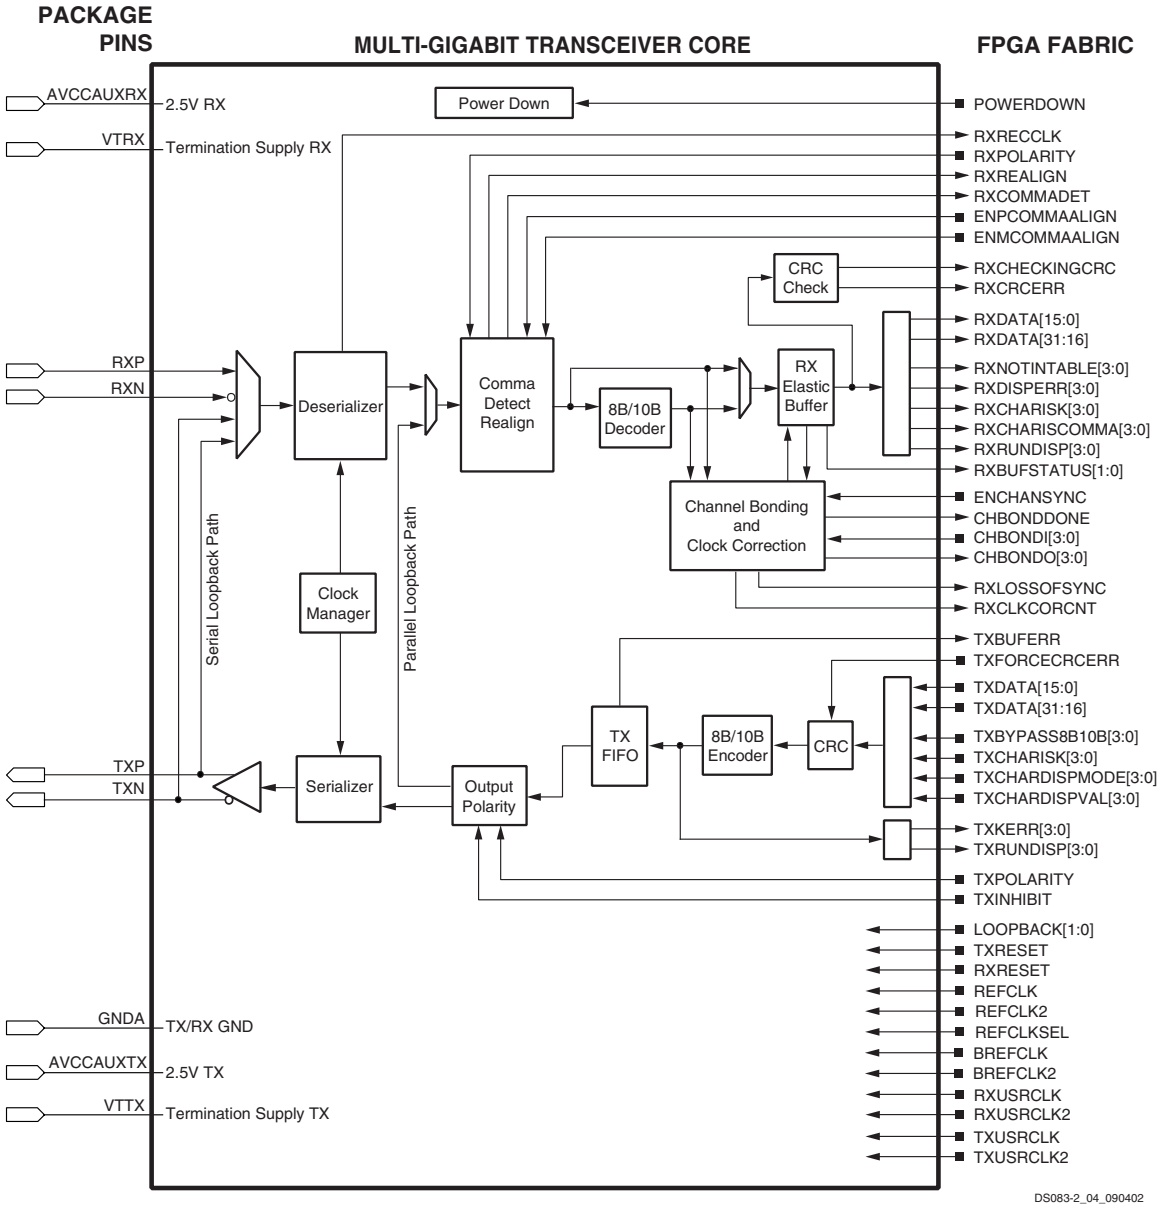


Figure 2: **RocketIO Transceiver Block Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 550 of 947

Clock Synthesizer

Synchronous serial data reception is facilitated by a clock/data recovery circuit. This circuit uses a fully monolithic Phase Lock Loop (PLL), which does not require any external components. The clock/data recovery circuit extracts both phase and frequency from the incoming data stream. The recovered clock is presented on output RXRECCLK at 1/20 of the serial received data rate.

The gigabit transceiver multiplies the reference frequency provided on the reference clock input (REFCLK) by 20. The multiplication of the clock is achieved by using a fully monolithic PLL that does not require any external components.

No fixed phase relationship is assumed between REFCLK, RXRECCLK, and/or any other clock that is not tied to either of these clocks. When the 4-byte or 1-byte receiver data path is used, RXUSRCLK and RXUSRCLK2 have different frequencies, and each edge of the slower clock is aligned to a falling edge of the faster clock. The same relationships apply to TXUSRCLK and TXUSRCLK2.

Clock and Data Recovery

The clock/data recovery (CDR) circuits will lock to the reference clock automatically if the data is not present. For proper operation, the frequency of the reference clock must be within ±100 ppm of the nominal frequency.

It is critical to keep power supply noise low in order to minimize common and differential noise modes into the clock/data recovery circuitry. Refer to the *RocketIO Transceiver User Guide* for more details.

Transmitter

FPGA Transmit Interface

The FPGA can send either one, two, or four characters of data to the transmitter. Each character can be either 8 bits or 10 bits wide. If 8-bit data is applied, the additional inputs become control signals for the 8B/10B encoder. When the 8B/10B encoder is bypassed, the 10-bit character order is generated as follows:

TXCHARDISPMODE[0] (first bit transmitted)
TXCHARDISPVAL[0]
TXDATA[7:0] (last bit transmitted is TXDATA[0])

8B/10B Encoder

A bypassable 8B/10B encoder is included. The encoder uses the same 256 data characters and 12 control characters that are used for Gigabit Ethernet, Fibre Channel, and InfiniBand.

The encoder accepts 8 bits of data along with a K-character signal for a total of 9 bits per character applied, and generates a 10 bit character for transmission. If the K-character signal is High, the data is encoded into one of the twelve possible K-characters available in the 8B/10B code. If the K-character input is Low, the 8 bits are encoded as standard data. If the K-character input is High, and a user applies other than one of the twelve possible combinations, TXKERR indicates the error.

Disparity Control

The 8B/10B encoder is initialized with a negative running disparity. Unique control allows forcing the current running disparity state.

TXRUNDISP signals its current running disparity. This may be useful in those cases where there is a need to manipulate the initial running disparity value.

Bits TXCHARDISPMODE and TXCHARDISPVAL control the generation of running disparity before each byte.

For example, the transceiver can generate the sequence

```
K28.5+ K28.5+ K28.5- K28.5-
```

or

```
K28.5- K28.5- K28.5+ K28.5+
```

by specifying inverted running disparity for the second and fourth bytes.

Transmit FIFO

Proper operation of the circuit is only possible if the FPGA clock (TXUSRCLK) is frequency-locked to the reference clock (REFCLK). Phase variations up to one clock cycle are allowable. The FIFO has a depth of four. Overflow or underflow conditions are detected and signaled at the interface. Bypassing of this FIFO is programmable.

Serializer

The multi-gigabit transceiver multiplies the reference frequency provided on the reference clock input (REFCLK) by 20. Clock multiplication is achieved by using a fully monolithic PLL requiring no external components. Data is converted from parallel to serial format and transmitted on the TXP and TXN differential outputs.

The electrical connection of TXP and TXN can be interchanged through configuration. This option can be controlled by an input (TXPOLARITY) at the FPGA transmitter interface. This facilitates recovery from situations where printed circuit board traces have been reversed.

Transmit Termination

On-chip termination is provided at the transmitter, eliminating the need for external termination. Programmable options exist for 50Ω (default) and 75Ω termination.

Pre-Emphasis Circuit and Swing Control

Four selectable levels of pre-emphasis (10% [default], 20%, 25%, and 33%) are available. Optimizing this setting allows the transceiver to drive various distances of PCB or cable at the maximum baud rate.

The programmable output swing control can adjust the differential output level between 400 mV and 800 mV in four increments of 100 mV.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 551 of 947

Receiver

Deserializer

The RocketIO transceiver accepts serial differential data on its RXP and RXN inputs. The clock/data recovery circuit extracts the clock and retimes incoming data to this clock. It uses a fully monolithic PLL requiring no external components. The clock/data recovery circuitry extracts both phase and frequency from the incoming data stream. The recovered clock is presented on output RXRECCLK at 1/20 of the received serial data rate.

The receiver is capable of handling either transition-rich 8B/10B streams or scrambled streams, and can withstand a string of up to 75 non-transitioning bits without an error.

Word alignment is dependent on the state of comma detect bits. If comma detect is enabled, the transceiver recognizes up to two 10-bit preprogrammed characters. Upon detection of the character or characters, the comma detect output is driven high and the data is synchronously aligned. If a comma is detected and the data is aligned, no further alignment alteration takes place. If a comma is received and realignment is necessary, the data is realigned and an indication is given at the receiver interface. The realignment indicator is a distinct output.

The transceiver continuously monitors the data for the presence of the 10-bit character(s). Upon each occurrence of a 10-bit character, the data is checked for word alignment. If comma detect is disabled, the data is not aligned to any particular pattern. The programmable option allows a user to align data on comma+, comma–, both, or a unique user-defined and programmed sequence.

The receiver can be configured to reverse the RXP and RXN inputs. This can be useful in the event that printed circuit board traces have been reversed.

Receiver Termination

On-chip termination is provided at the receiver, eliminating the need for external termination. The receiver includes programmable on-chip termination circuitry for 50Ω (default) or 75Ω impedance.

8B/10B Decoder

An optional 8B/10B decoder is included. A programmable option allows the decoder to be bypassed. When the 8B/10B decoder is bypassed, the 10-bit character order is, for example,

RXCHARISK[0] (first bit received)
RXRUNDISP[0]
RXDATA[7:0] (last bit received is RXDATA[0])

The decoder uses the same table that is used for Gigabit Ethernet, Fibre Channel, and InfiniBand. In addition to decoding all data and K-characters, the decoder has several extra features. The decoder separately detects both “disparity errors” and “out-of-band” errors. A disparity error is the reception of 10-bit character that exists within the 8B/10B table but has an incorrect disparity. An out-of-band error is the reception of a 10-bit character that does not exist within the 8B/10B table. It is possible to obtain an out-of-band error without having a disparity error. The proper disparity is always computed for both legal and illegal characters. The current running disparity is available at the RXRUNDISP signal.

The 8B/10B decoder performs a unique operation if out-of-band data is detected. If out-of-band data is detected, the decoder signals the error and passes the illegal 10-bits through and places them on the outputs. This can be used for debugging purposes if desired.

The decoder also signals the reception of one of the 12 valid K-characters. In addition, a programmable comma detect is included. The comma detect signal registers a comma on the receipt of any comma+, comma–, or both. Since the comma is defined as a 7-bit character, this includes several out-of-band characters. Another option allows the decoder to detect only the three defined commas (K28.1, K28.5, and K28.7) as comma+, comma–, or both. In total, there are six possible options, three for valid commas and three for "any comma."

Note that all bytes (1, 2, or 4) at the RX FPGA interface each have their own individual 8B/10B indicators (K-character, disparity error, out-of-band error, current running disparity, and comma detect).

Loopback

In order to facilitate testing without having the need to either apply patterns or measure data at GHz rates, two programmable loop-back features are available.

One option, serial loopback, places the gigabit transceiver into a state where transmit data is directly fed back to the receiver. An important point to note is that the feedback path is at the output pads of the transmitter. This tests the entirety of the transmitter and receiver.

The second option, parallel loopback, checks the digital circuitry. When parallel loopback is enabled, the serial loopback path is disabled. However, the transmitter outputs remain active, and data can be transmitted. If TXINHIBIT is asserted, TXP is forced to 0 until TXINHIBIT is de-asserted.

Elastic and Transmitter Buffers

Both the transmitter and the receiver include buffers (FIFOs) in the datapath. This section gives the reasons for including the buffers and outlines their operation.

Receiver Buffer

The receiver buffer is required for two reasons:

- *Clock correction* to accommodate the slight difference in frequency between the recovered clock RXRECCLK and the internal FPGA user clock RXUSRCLK
- *Channel bonding* to allow realignment of the input stream to ensure proper alignment of data being read through multiple transceivers

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 552 of 947

The receiver uses an *elastic buffer*, where "elastic" refers to the ability to modify the read pointer for clock correction and channel bonding.

Clock Correction

Clock RXRECCLK (the recovered clock) reflects the data rate of the incoming data. Clock RXUSRCLK defines the rate at which the FPGA fabric consumes the data. Ideally, these rates are identical. However, since the clocks typically have different sources, one of the clocks will be faster than the other. The receiver buffer accommodates this difference between the clock rates. See Figure 3.

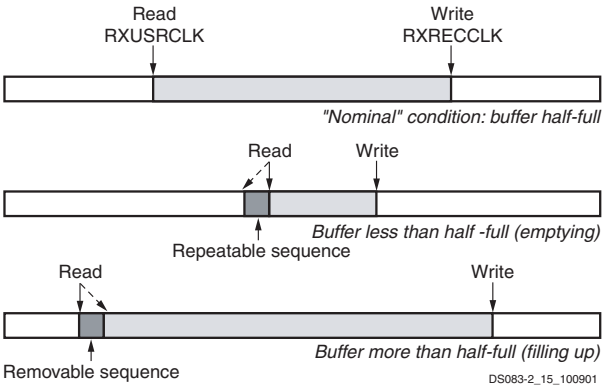


Figure 3: **Clock Correction in Receiver**

Nominally, the buffer is always half full. This is shown in the top buffer, Figure 3, where the shaded area represents buffered data not yet read. Received data is inserted via the write pointer under control of RXRECCLK. The FPGA fabric reads data via the read pointer under control of RXUSRCLK. The half full/half empty condition of the buffer gives a cushion for the differing clock rates. This operation continues indefinitely, regardless of whether or not "meaningful" data is being received. When there is no meaningful data to be received, the incoming data will consist of IDLE characters or other padding.

If RXUSRCLK is faster than RXRECCLK, the buffer becomes more empty over time. The clock correction logic corrects for this by decrementing the read pointer to reread a repeatable byte sequence. This is shown in the middle buffer, Figure 3, where the solid read pointer decrements to the value represented by the dashed pointer. By decrementing the read pointer instead of incrementing it in the usual fashion, the buffer is partially refilled. The transceiver design will repeat a single repeatable byte sequence when necessary to refill a buffer. If the byte sequence length is greater than one, and if attribute CLK_COR_REPEAT_WAIT is 0, then the transceiver may repeat the same sequence multiple times until the buffer is refilled to the desired extent.

Similarly, if RXUSRCLK is slower than RXRECCLK, the buffer will fill up over time. The clock correction logic corrects for this by incrementing the read pointer to skip over a removable byte sequence that need not appear in the final FPGA fabric byte stream. This is shown in the bottom buffer, Figure 3, where the solid read pointer increments to the value represented by the dashed pointer. This accelerates the emptying of the buffer, preventing its overflow. The transceiver design will skip a single byte sequence when necessary to partially empty a buffer. If attribute CLK_COR_REPEAT_WAIT is 0, the transceiver may also skip two consecutive removable byte sequences in one step to further empty the buffer when necessary.

These operations require the clock correction logic to recognize a byte sequence that can be freely repeated or omitted in the incoming data stream. This sequence is generally an IDLE sequence, or other sequence comprised of special values that occur in the gaps separating packets of meaningful data. These gaps are required to occur sufficiently often to facilitate the timely execution of clock correction.

Channel Bonding

Some gigabit I/O standards such as Infiniband specify the use of multiple transceivers in parallel for even higher data rates. Words of data are split into bytes, with each byte sent over a separate channel (transceiver). See Figure 4.

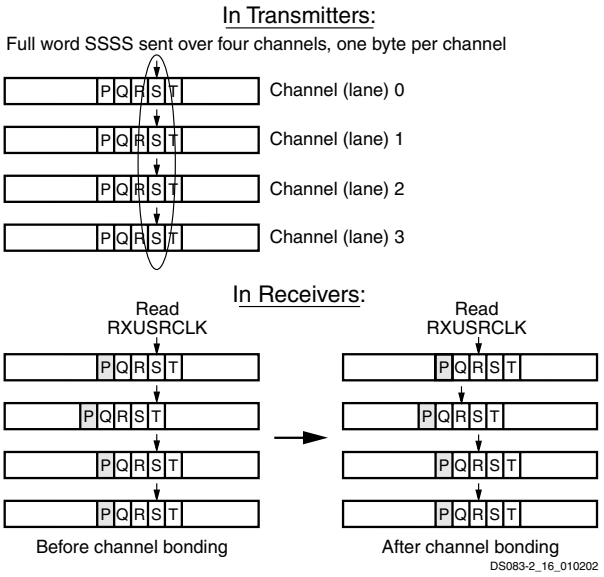


Figure 4: **Channel Bonding (Alignment)**

The top half of the figure shows the transmission of words split across four transceivers (channels or lanes). PPPP, QQQQ, RRRR, SSSS, and TTTT represent words sent over the four channels.

The bottom-left portion of Figure 4 shows the initial situation in the FPGA's receivers at the other end of the four channels. Due to variations in transmission delay—especially if the channels are routed through repeaters—the FPGA fabric might not correctly assemble the bytes into complete

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 553/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 553 of 947

words. The bottom-left illustration shows the incorrect assembly of data words PQPP, QRQQ, RSRR, and so forth.

To support correction of this misalignment, the data stream includes special byte sequences that define corresponding points in the several channels. In the bottom half of Figure 4, the shaded "P" bytes represent these special characters. Each receiver recognizes the "P" channel bonding character, and remembers its location in the buffer. At some point, one transceiver designated as the master instructs all the transceivers to align to the channel bonding character "P" (or to some location relative to the channel bonding character).

After this operation, words transmitted to the FPGA fabric are properly aligned: RRRR, SSSS, TTTT, and so forth, as shown in the bottom-right portion of Figure 4. To ensure that the channels remain properly aligned following the channel bonding operation, the master transceiver must also control the clock correction operations described in the previous section for all channel-bonded transceivers.

Transmitter Buffer

The transmitter's buffer write pointer (TXUSRCLK) is frequency-locked to its read pointer (REFCLK). Therefore, clock correction and channel bonding are not required. The purpose of the transmitter's buffer is to accommodate a phase difference between TXUSRCLK and REFCLK. A simple FIFO suffices for this purpose. A FIFO depth of four will permit reliable operation with simple detection of overflow or underflow, which could occur if the clocks are not frequency-locked.

CRC

The RocketIO transceiver CRC logic supports the 32-bit invariant CRC calculation used by Infiniband, FibreChannel, and Gigabit Ethernet.

On the transmitter side, the CRC logic recognizes where the CRC bytes should be inserted and replaces four placeholder bytes at the tail of a data packet with the computed CRC. For Gigabit Ethernet and FibreChannel, transmitter CRC may adjust certain trailing bytes to generate the required running disparity at the end of the packet.

On the receiver side, the CRC logic verifies the received CRC value, supporting the same standards as above.

The CRC logic also supports a user mode, with a simple data packet stucture beginning and ending with user-defined SOP and EOP characters.

Configuration

This section outlines functions that can be selected or controlled by configuration. Xilinx implementation software supports 16 transceiver primitives, as shown in Table 2.

Each of the primitives in Table 2 defines default values for the configuration attributes, allowing some number of them to be modified by the user. Refer to the *RocketIO Transceiver User Guide* for more details.

Table 2: **Supported RocketIO Transceiver Protocol Primitives**

GT_CUSTOM	Fully customizable by user
GT_FIBRE_CHAN_1	Fibre Channel, 1-byte data path
GT_FIBRE_CHAN_2	Fibre Channel, 2-byte data path
GT_FIBRE_CHAN_4	Fibre Channel, 4-byte data path
GT_ETHERNET_1	Gigabit Ethernet, 1-byte data path
GT_ETHERNET_2	Gigabit Ethernet, 2-byte data path
GT_ETHERNET_4	Gigabit Ethernet, 4-byte data path
GT_XAUI_1	10-gigabit Ethernet, 1-byte data path
GT_XAUI_2	10-gigabit Ethernet, 2-byte data path
GT_XAUI_4	10-gigabit Ethernet, 4-byte data path
GT_INFINIBAND_1	Infiniband, 1-byte data path
GT_INFINIBAND_2	Infiniband, 2-byte data path
GT_INFINIBAND_4	Infiniband, 4-byte data path
GT_AURORA_1(1)	1-byte data path
GT_AURORA_2(1)	2-byte data path
GT_AURORA_4(1)	4-byte data path

Notes:
1. For more information on the Aurora protocol, visit http://www.xilinx.com.

Reset

The receiver and transmitter have their own synchronous reset inputs. The transmitter reset recenters the transmission FIFO, and resets all transmitter registers and the 8B/10B decoder. The receiver reset recenters the receiver elastic buffer, and resets all receiver registers and the 8B/10B encoder. Neither reset has any effect on the PLLs.

Power

All RocketIO transceivers in the FPGA, whether instantiated in the design or not, must be connected to power and ground. Unused transceivers can be powered by any 2.5V source, and passive filtering is not required.

Power Down

The Power Down module is controlled by the transceiver's POWERDOWN input pin. The Power Down pin on the FPGA package has no effect on the transceiver.

Power Sequencing

Although applying power in a random order does not damage the device, it is recommended to apply power in the following sequence to minimize power-on current:

1. Apply FPGA fabric power supplies (V_{CCINT} and V_{CCAUX}) in any order.
2. Apply AVCCAUXRX.
3. Apply AVCCAUXTX, V_{TTX}, and V_{TRX} in any order.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 554 of 947

Functional Description: Processor Block

This section briefly describes the interfaces and components of the Processor Block. The subsequent section, Functional Description: Embedded PowerPC 405 Core beginning on page 9, offers a summary of major PPC405 core features. For an in-depth discussion on both the Processor Block and PPC405, see the ***PowerPC Processor Reference Guide*** and the ***PowerPC405 Processor Block Reference Guide*** available on the Xilinx website at **http://www.xilinx.com**.

Processor Block Overview

Figure 5 shows the internal architecture of the Processor Block.

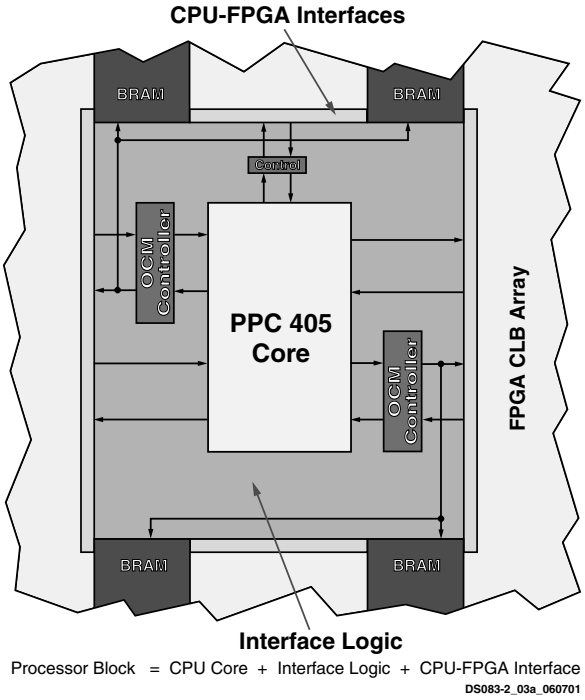


Figure 5: **Processor Block Architecture**

Within the Virtex-II Pro Processor Block, there are four components:

- Embedded IBM PowerPC 405-D5 RISC CPU core
- On-Chip Memory (OCM) controllers and interfaces
- Clock/control interface logic
- CPU-FPGA Interfaces

Embedded PowerPC 405 RISC Core

The PowerPC 405D5 core is a 0.13 µm implementation of the IBM PowerPC 405D4 core. The advanced process technology enables the embedded PowerPC 405 (PPC405) core to operate at 300+ MHz while maintaining low power consumption. Specially designed interface logic integrates the core with the surrounding CLBs, block RAMs, and general routing resources. Up to four Processor Blocks can be available in a single Virtex-II Pro device.

The embedded PPC405 core implements the PowerPC User Instruction Set Architecture (UISA), user-level registers, programming model, data types, and addressing modes for 32-bit fixed-point operations. 64-bit operations, auxiliary processor operations, and floating-point operations are trapped and can be emulated in software.

Most of the PPC405 core features are compatible with the specifications for the PowerPC Virtual Environment Architecture (VEA) and Operating Environment Architecture (OEA). They also provide a number of optimizations and extensions to the lower layers of the PowerPC Architecture. The full architecture of the PPC405 is defined by the PowerPC Embedded Environment and PowerPC UISA documentation, available from IBM.

On-Chip Memory (OCM) Controllers

Introduction

The OCM controllers serve as dedicated interfaces between the block RAMs in the FPGA fabric (see 18 Kb Block SelectRAM+ Resources, page 33) and OCM signals available on the embedded PPC405 core. The OCM signals on the PPC405 core are designed to provide very quick access to a fixed amount of instruction and data memory space. The OCM controller provides an interface to both the 64-bit Instruction-Side Block RAM (ISBRAM) and the 32-bit Data-Side Block RAM (DSBRAM). The designer can choose to implement:

- ISBRAM only
- DSBRAM only
- Both ISBRAM and DSBRAM
- No ISBRAM and no DSBRAM

One of OCM's primary advantages is that it guarantees a fixed latency of execution for a higher level of determinism. Additionally, it reduces cache pollution and thrashing, since the cache remains available for caching code from other memory resources.

Typical applications for DSOCM include scratch-pad memory, as well as use of the dual-port feature of block RAM to enable bidirectional data transfer between processor and FPGA. Typical applications for ISOCM include storage of interrupt service routines.

Functional Features

Common Features

- Separate Instruction and Data memory interface between processor core and BRAMs in FPGA
- Dedicated interface to Device Control Register (DCR) bus for ISOCM and DSOCM

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 555/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 555 of 947

- Single-cycle and multi-cycle mode option for I-side and D-side interfaces
- Single cycle = one CPU clock cycle; multi-cycle = minimum of two and maximum of eight CPU clock cycles
- FPGA configurable DCR addresses within DSOCM and ISOCM.
- Independent 16 MB logical memory space available within PPC405 memory map for each of the DSOCM and ISOCM. The number of block RAMs in the device might limit the maximum amount of OCM supported.
- Maximum of 64K and 128K bytes addressable from DSOCM and ISOCM interfaces, respectively, using address outputs from OCM directly without additional decoding logic.

Data-Side OCM (DSOCM)

- 32-bit Data Read bus and 32-bit Data Write bus
- Byte write access to DSBRAM support
- Second port of dual port DSBRAM is available to read/write from an FPGA interface
- 22-bit address to DSBRAM port
- 8-bit DCR Registers: DSCNTL, DSARC
- Three alternatives to write into DSBRAM: BRAM initialization, CPU, FPGA H/W using second port

Instruction-Side OCM (ISOCM)

The ISOCM interface contains a 64-bit read only port, for instruction fetches, and a 32-bit write only port, to initialize or test the ISBRAM. When implementing the read only port, the user must deassert the write port inputs. The preferred method of initializing the ISBRAM is through the configuration bitstream.

- 64-bit Data Read Only bus (two instructions per cycle)
- 32-bit Data Write Only bus (through DCR)
- Separate 21-bit address to ISBRAM
- 8-bit DCR Registers: ISCNTL, ISARC
- 32-bit DCR Registers: ISINIT, ISFILL
- Two alternatives to write into ISBRAM: BRAM initialization, DCR and write instruction

Clock/Control Interface Logic

The clock/control interface logic provides proper initialization and connections for PPC405 clock/power management, resets, PLB cycle control, and OCM interfaces. It also couples user signals between the FPGA fabric and the embedded PPC405 CPU core.

The processor clock connectivity is similar to CLB clock pins. It can connect either to global clock nets or general routing resources. Therefore the processor clock source can come from DCM, CLB, or user package pin.

CPU-FPGA Interfaces

All Processor Block user pins link up with the general FPGA routing resources through the CPU-FPGA interface. Therefore processor signals have the same routability as other non-Processor Block user signals. Longlines and hex lines travel across the Processor Block both vertically and horizontally, allowing signals to route through the Processor Block.

Processor Local Bus (PLB) Interfaces

The PPC405 core accesses high-speed system resources through PLB interfaces on the instruction and data cache controllers. The PLB interfaces provide separate 32-bit address/64-bit data buses for the instruction and data sides.

The cache controllers are both PLB masters. PLB arbiters are implemented in the FPGA fabric and are available as soft IP cores.

Device Control Register (DCR) Bus Interface

The device control register (DCR) bus has 10 bits of address space for components external to the PPC405 core. Using the DCR bus to manage status and configuration registers reduces PLB traffic and improves system integrity. System resources on the DCR bus are protected or isolated from wayward code since the DCR bus is not part of the system memory map.

External Interrupt Controller (EIC) Interface

Two level-sensitive user interrupt pins (critical and non-critical) are available. They can be either driven by user defined logic or Xilinx soft interrupt controller IP core outside the Processor Block.

Clock/Power Management (CPM) Interface

The CPM interface supports several methods of clock distribution and power management. Three modes of operation that reduce power consumption below the normal operational level are available.

Reset Interface

There are three user reset input pins (core, chip, and system) and three user reset output pins for different levels of reset, if required.

Debug Interface

Debugging interfaces on the embedded PPC405 core, consisting of the JTAG and Trace ports, offer access to resources internal to the core and assist in software development. The JTAG port provides basic JTAG chip testing functionality as well as the ability for external debug tools to gain control of the processor for debug purposes. The Trace port furnishes programmers with a mechanism for acquiring instruction execution traces.

The JTAG port complies with IEEE Std 1149.1, which defines a test access port (TAP) and boundary scan architecture. Extensions to the JTAG interface provide

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 556 of 947

debuggers with processor control that includes stopping, starting, and stepping the PPC405 core. These extensions are compliant with the IEEE 1149.1 specifications for vendor-specific extensions.

The Trace port provides instruction execution trace information to an external trace tool. The PPC405 core is capable of back trace and forward trace. Back trace is the tracing of instructions prior to a debug event while forward trace is the tracing of instructions after a debug event.

The processor JTAG port and the FPGA JTAG port can be accessed independently, or the two can be programmatically linked together and accessed via the dedicated FPGA JTAG pins.

For detailed information on the PPC405 JTAG interface, please refer to the "JTAG Interface" section of the ***PowerPC405 Processor Block Reference Guide***

CoreConnect™ Bus Architecture

The Processor Block is compatible with the CoreConnect™ bus architecture. Any CoreConnect compliant cores including Xilinx soft IP can integrate with the Processor Block through this high-performance bus architecture implemented on FPGA fabric.

The CoreConnect architecture provides three buses for interconnecting Processor Blocks, Xilinx soft IP, third party IP, and custom logic, as shown in Figure 6:

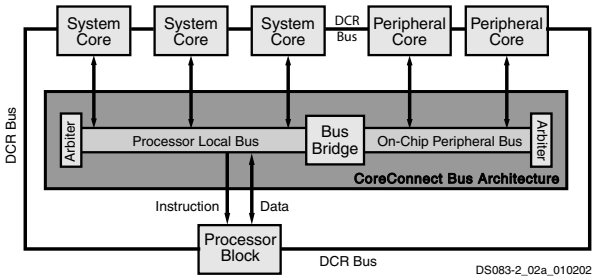


Figure 6: **CoreConnect Block Diagram**

- Processor Local Bus (PLB)
- On-Chip Peripheral Bus (OPB)
- Device Control Register (DCR) bus

High-performance peripherals connect to the high-bandwidth, low-latency PLB. Slower peripheral cores connect to the OPB, which reduces traffic on the PLB, resulting in greater overall system performance.

For more information, refer to:
http://www-3.ibm.com/chips/techlib/techlib.nfs/productfamilies/CoreConnect_Bus_Architecture/

Functional Description: Embedded PowerPC 405 Core

This section offers a brief overview of the various functional blocks shown in Figure 7.

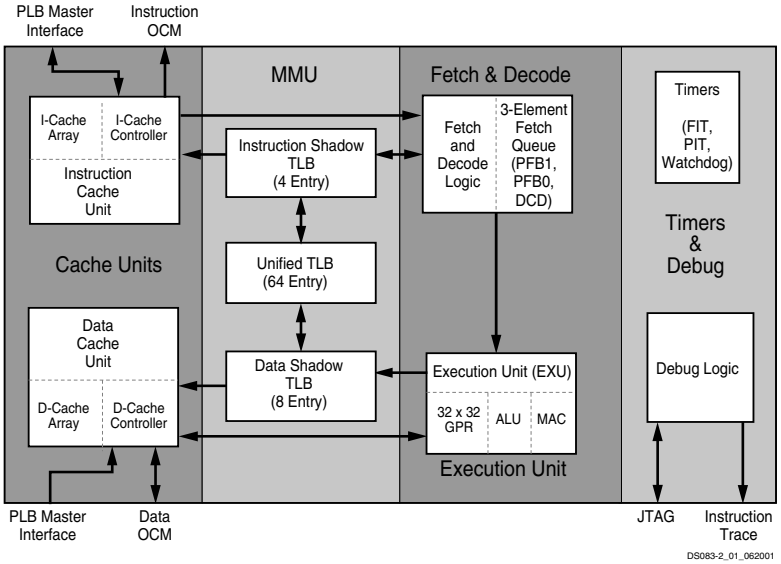


Figure 7: **Embedded PPC405 Core Block Diagram**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 557/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 557 of 947

Embedded PPC405 Core

The embedded PPC405 core is a 32-bit Harvard architecture processor. Figure 7 illustrates its functional blocks:

- Cache units
- Memory Management unit
- Fetch Decode unit
- Execution unit
- Timers
- Debug logic unit

It operates on instructions in a five stage pipeline consisting of a fetch, decode, execute, write-back, and load write-back stage. Most instructions execute in a single cycle, including loads and stores.

Instruction and Data Cache

The embedded PPC405 core provides an instruction cache unit (ICU) and a data cache unit (DCU) that allow concurrent accesses and minimize pipeline stalls. The instruction and data cache array are 16 KB each. Both cache units are two-way set associative. Each way is organized into 256 lines of 32 bytes (eight words). The instruction set provides a rich assortment of cache control instructions, including instructions to read tag information and data arrays.

The PPC405 core accesses external memory through the instruction (ICU) and data cache units (DCU). The cache units each include a 64-bit PLB master interface, cache arrays, and a cache controller. The ICU and DCU handle cache misses as requests over the PLB to another PLB device such as an external bus interface unit. Cache hits are handled as single cycle memory accesses to the instruction and data caches.

Instruction Cache Unit (ICU)

The ICU provides one or two instructions per cycle to the instruction queue over a 64-bit bus. A line buffer (built into the output of the array for manufacturing test) enables the ICU to be accessed only once for every four instructions, to reduce power consumption by the array.

The ICU can forward any or all of the four or eight words of a line fill to the EXU to minimize pipeline stalls caused by cache misses. The ICU aborts speculative fetches abandoned by the EXU, eliminating unnecessary line fills and enabling the ICU to handle the next EXU fetch. Aborting abandoned requests also eliminates unnecessary external bus activity, thereby increasing external bus utilization.

Data Cache Unit (DCU)

The DCU transfers one, two, three, four, or eight bytes per cycle, depending on the number of byte enables presented by the CPU. The DCU contains a single-element command and store data queue to reduce pipeline stalls; this queue enables the DCU to independently process load/store and cache control instructions. Dynamic PLB request prioritization reduces pipeline stalls even further. When the DCU is busy with a low-priority request while a subsequent storage operation requested by the CPU is stalled; the DCU automatically increases the priority of the current request to the PLB.

The DCU provides additional features that allow the programmer to tailor its performance for a given application. The DCU can function in write-back or write-through mode, as controlled by the Data Cache Write-through Register (DCWR) or the Translation Look-aside Buffer (TLB); the cache controller can be tuned for a balance of performance and memory coherency. Write-on-allocate, controlled by the store word on allocate (SWOA) field of the Core Configuration Register 0 (CCR0), can inhibit line fills caused by store misses, to further reduce potential pipeline stalls and unwanted external bus traffic.

Fetch and Decode Logic

The fetch/decode logic maintains a steady flow of instructions to the execution unit by placing up to two instructions in the fetch queue. The fetch queue consists of three buffers: pre-fetch buffer 1 (PFB1), pre-fetch buffer 0 (PFB0), and decode (DCD). The fetch logic ensures that instructions proceed directly to decode when the queue is empty.

Static branch prediction as implemented on the PPC405 core takes advantage of some standard statistical properties of code. Branches with negative address displacement are by default assumed taken. Branches that do not test the condition or count registers are also predicted as taken. The PPC405 core bases branch prediction upon these default conditions when a branch is not resolved and speculatively fetches along the predicted path. The default prediction can be overridden by software at assembly or compile time.

Branches are examined in the decode and pre-fetch buffer 0 fetch queue stages. Two branch instructions can be handled simultaneously. If the branch in decode is not taken, the fetch logic fetches along the predicted path of the branch instruction in pre-fetch buffer 0. If the branch in decode is taken, the fetch logic ignores the branch instruction in pre-fetch buffer 0.

Execution Unit

The embedded PPC405 core has a single issue execution unit (EXU) containing the register file, arithmetic logic unit (ALU), and the multiply-accumulate (MAC) unit. The execution unit performs all 32-bit PowerPC integer instructions in hardware.

The register file is comprised of thirty-two 32-bit general purpose registers (GPR), which are accessed with three read ports and two write ports. During the decode stage, data is read out of the GPRs and fed to the execution unit. Likewise, during the write-back stage, results are written to the GPR. The use of the five ports on the register file enables either a load or a store operation to execute in parallel with an ALU operation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 558 of 947

Memory Management Unit (MMU)

The embedded PPC405 core has a 4 GB address space, which is presented as a flat address space.

The MMU provides address translation, protection functions, and storage attribute control for embedded applications. The MMU supports demand-paged virtual memory and other management schemes that require precise control of logical-to-physical address mapping and flexible memory protection. Working with appropriate system-level software, the MMU provides the following functions:

- Translation of the 4 GB effective address space into physical addresses
- Independent enabling of instruction and data translation/protection
- Page-level access control using the translation mechanism
- Software control of page replacement strategy
- Additional control over protection using zones
- Storage attributes for cache policy and speculative memory access control

The MMU can be disabled under software control. If the MMU is not used, the PPC405 core provides other storage control mechanisms.

Translation Look-Aside Buffer (TLB)

The Translation Look-Aside Buffer (TLB) is the hardware resource that controls translation and protection. It consists of 64 entries, each specifying a page to be translated. The TLB is fully associative; a given page entry can be placed anywhere in the TLB. The translation function of the MMU occurs pre-cache. Cache tags and indexing use physical addresses.

Software manages the establishment and replacement of TLB entries. This gives system software significant flexibility in implementing a custom page replacement strategy. For example, to reduce TLB thrashing or translation delays, software can reserve several TLB entries in the TLB for globally accessible static mappings. The instruction set provides several instructions used to manage TLB entries. These instructions are privileged and require the software to be executing in supervisor state. Additional TLB instructions are provided to move TLB entry fields to and from GPRs.

The MMU divides logical storage into pages. Eight page sizes (1 KB, 4 KB, 16 KB, 64 KB, 256 KB, 1 MB, 4 MB, and 16 MB) are simultaneously supported, such that, at any given time, the TLB can contain entries for any combination of page sizes. In order for a logical to physical translation to exist, a valid entry for the page containing the logical address must be in the TLB. Addresses for which no TLB entry exists cause TLB-Miss exceptions.

To improve performance, four instruction-side and eight data-side TLB entries are kept in shadow arrays. The shadow arrays allow single-cycle address translation and also help to avoid TLB contention between load/store and instruction fetch operations. Hardware manages the replacement and invalidation of shadow-TLB entries; no system software action is required.

Memory Protection

When address translation is enabled, the translation mechanism provides a basic level of protection.

The Zone Protection Register (ZPR) enables the system software to override the TLB access controls. For example, the ZPR provides a way to deny read access to application programs. The ZPR can be used to classify storage by type; access by type can be changed without manipulating individual TLB entries.

The PowerPC Architecture provides WIU0GE (write-back / write-through, cacheability, user-defined 0, guarded, endian) storage attributes that control memory accesses, using bits in the TLB or, when address translation is disabled, storage attribute control registers.

When address translation is enabled, storage attribute control bits in the TLB control the storage attributes associated with the current page. When address translation is disabled, bits in each storage attribute control register control the storage attributes associated with storage regions. Each storage attribute control register contains 32 fields. Each field sets the associated storage attribute for a 128 MB memory region.

Timers

The embedded PPC405 core contains a 64-bit time base and three timers, as shown in Figure 8:

- Programmable Interval Timer (PIT)
- Fixed Interval Timer (FIT)
- Watchdog Timer (WDT)

The time base counter increments either by an internal signal equal to the CPU clock rate or by a separate external timer clock signal. No interrupts are generated when the time base rolls over. The three timers are synchronous with the time base.

The PIT is a 32-bit register that decrements at the same rate as the time base is incremented. The user loads the PIT register with a value to create the desired delay. When the register reaches zero, the timer stops decrementing and generates a PIT interrupt. Optionally, the PIT can be programmed to auto-reload the last value written to the PIT register, after which the PIT continues to decrement.

The FIT generates periodic interrupts based on one of four selectable bits in the time base. When the selected bit changes from 0 to 1, the PPC405 core generates a FIT interrupt.

The WDT provides a periodic critical-class interrupt based on a selected bit in the time base. This interrupt can be used for system error recovery in the event of software or system

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 559/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 559 of 947

lockups. Users may select one of four time periods for the interval and the type of reset generated if the WDT expires twice without an intervening clear from software. If enabled, the watchdog timer generates a reset unless an exception handler updates the WDT status bit before the timer has completed two of the selected timer intervals.

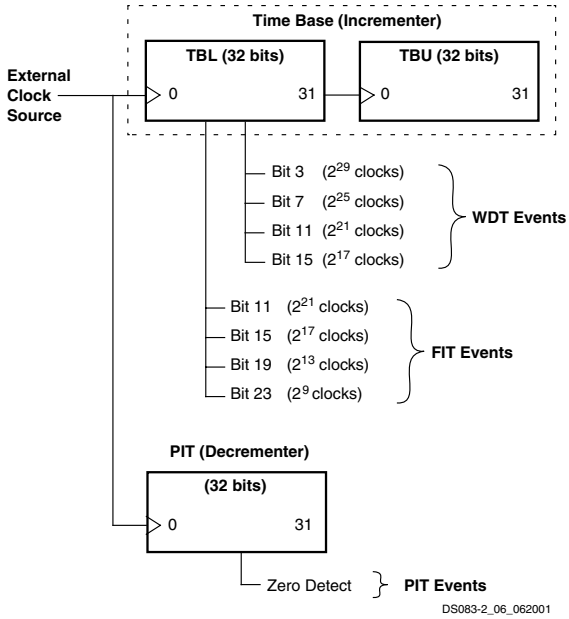


Figure 8: **Relationship of Timer Facilities to Base Clock**

Interrupts

The PPC405 provides an interface to an interrupt controller that is logically outside the PPC405 core. This controller combines the asynchronous interrupt inputs and presents them to the embedded core as a single interrupt signal. The sources of asynchronous interrupts are external signals, the JTAG/debug unit, and any implemented peripherals.

Debug Logic

All architected resources on the embedded PPC405 core can be accessed through the debug logic. Upon a debug event, the PPC405 core provides debug information to an external debug tool. Three different types of tools are supported depending on the debug mode: ROM monitors, JTAG debuggers, and instruction trace tools.

In internal debug mode, a debug event enables exception-handling software at a dedicated interrupt vector to take over the CPU core and communicate with a debug tool. The debug tool has read-write access to all registers and can set hardware or software breakpoints. ROM monitors typically use the internal debug mode.

In external debug mode, the CPU core enters stop state (stops instruction execution) when a debug event occurs. This mode offers a debug tool read-write access to all registers in the PPC405 core. Once the CPU core is in stop state, the debug tool can start the CPU core, step an instruction, freeze the timers, or set hardware or software break points. In addition to CPU core control, the debug logic is capable of writing instructions into the instruction cache, eliminating the need for external memory during initial board bring-up. Communication to a debug tool using external debug mode is through the JTAG port.

Debug wait mode offers the same functionality as external debug mode with one exception. In debug wait mode, the CPU core goes into wait state instead of stop state after a debug event. Wait state is identical to stop state until an interrupt occurs. In wait state, the PPC405 core can vector to an exception handler, service an interrupt and return to wait state. This mode is particularly useful when debugging real time control systems.

Real-time trace debug mode is always enabled. The debug logic continuously broadcasts instruction trace information to the trace port. When a debug event occurs, the debug logic signals an external debug tool to save instruction trace information before and after the event. The number of instructions traced depends on the trace tool.

Debug events signal the debug logic to stop the CPU core, put the CPU core in debug wait state, cause a debug exception or save instruction trace information.

Big Endian and Little Endian Support

The embedded PPC405 core supports big endian or little endian byte ordering for instructions stored in external memory. Since the PowerPC architecture is big endian internally, the ICU rearranges the instructions stored as little endian into the big endian format. Therefore, the instruction cache always contains instructions in big endian format so that the byte ordering is correct for the execution unit. This feature allows the 405 core to be used in systems designed to function in a little endian environment.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 560 of 947

Functional Description: FPGA

Input/Output Blocks (IOBs)

Virtex-II Pro I/O blocks (IOBs) are provided in groups of two or four on the perimeter of each device. Each IOB can be used as input and/or output for single-ended I/Os. Two IOBs can be used as a differential pair. A differential pair is always connected to the same switch matrix, as shown in Figure 9.

IOB blocks are designed for high-performance I/O, supporting 22 single-ended standards, as well as differential signaling with LVDS, LDT, bus LVDS, and LVPECL.

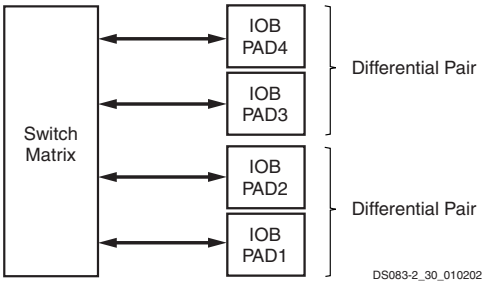


Figure 9: **Virtex-II Pro Input/Output Tile**

Note: Differential I/Os must use the same clock.

Supported I/O Standards

Virtex-II Pro IOB blocks feature SelectIO-Ultra inputs and outputs that support a wide variety of I/O signaling standards. In addition to the internal supply voltage (V_{CCINT} = 1.5V), output driver supply voltage (V_{CCO}) is dependent on the I/O standard (see Table 3 and Table 4). An auxiliary supply voltage (V_{CCAUX} = 2.5V) is required, regardless of the I/O standard used. For exact supply voltage absolute maximum ratings, see **Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)**.

All of the user IOBs have fixed-clamp diodes to V_{CCO} and to ground. The IOBs are not compatible or compliant with 5V I/O standards (not 5V-tolerant).

Table 5 lists supported I/O standards with Digitally Controlled Impedance. See Digitally Controlled Impedance (DCI), page 19.

Table 3: **Supported Single-Ended I/O Standards**

I/O Standard	Output V_{CCO}	Input V_{CCO}	Input V_{REF}	Board Termination Voltage (V_{TT})
LVTTL	3.3	3.3	N/R	N/R
LVCMOS33	3.3	3.3	N/R	N/R
LVCMOS25	2.5	2.5	N/R	N/R
LVCMOS18	1.8	1.8	N/R	N/R
LVCMOS15	1.5	1.5	N/R	N/R
PCI33_3	Note (1)	Note (1)	N/R	N/R
PCI66_3	Note (1)	Note (1)	N/R	N/R
PCI-X	Note (1)	Note (1)	N/R	N/R
GTL	Note (2)	Note (2)	0.8	1.2
GTLP	Note (2)	Note (2)	1.0	1.5
HSTL_I	1.5	N/R	0.75	0.75
HSTL_II	1.5	N/R	0.75	0.75
HSTL_III	1.5	N/R	0.9	1.5
HSTL_IV	1.5	N/R	0.9	1.5
HSTL_I_18	1.8	N/R	0.9	0.9
HSTL_II_18	1.8	N/R	0.9	0.9
HSTL_III _18	1.8	N/R	1.08	1.8
HSTL_IV_18	1.8	N/R	1.08	1.8
SSTL2_I	2.5	N/R	1.25	1.25
SSTL2_II	2.5	N/R	1.25	1.25
SSTL18_I (3)	1.8	N/R	0.9	0.9
SSTL18_II	1.8	N/R	0.9	0.9

Notes:
1. For PCI and PCI-X standards, refer to **XAPP653**.
2. V_{CCO} of GTL or GTLP should not be lower than the termination voltage or the voltage seen at the I/O pad.
3. SSTL18_I is not a JEDEC-supported standard.
4. N/R = no requirement.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 561/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 561 of 947

Table 4: **Supported Differential Signal I/O Standards**

I/O Standard	Output V_{CCO}	Input V_{CCO}	Input V_{REF}	Output V_{OD}
LDT_25	2.5	N/R	N/R	0.500 – 0.740
LVDS_25	2.5	N/R	N/R	0.247 – 0.454
LVDSEXT_25	2.5	N/R	N/R	0.330 – 0.700
BLVDS_25	2.5	N/R	N/R	0.250 – 0.450
ULVDS_25	2.5	N/R	N/R	0.500 – 0.740
LVPECL_25	2.5	N/R	N/R	0.345 – 1.185
LDT_25_DT(1)	2.5	2.5	N/R	0.500 – 0.740
LVDS_25_DT(1)	2.5	2.5	N/R	0.247 – 0.454
LVDSEXT_25_DT(1)	2.5	2.5	N/R	0.330 – 0.700
ULVDS_25_DT(1)	2.5	2.5	N/R	0.500 – 0.740

Notes:
1. These standards support on-chip 100Ω termination.
2. N/R = no requirement.

Table 5: **Supported DCI I/O Standards**

I/O Standard	Output V_{CCO}	Input V_{CCO}	Input V_{REF}	Termination Type
LVDCI_33(1)	3.3	3.3	N/R	Series
LVDCI_25	2.5	2.5	N/R	Series
LVDCI_DV2_25	2.5	2.5	N/R	Series
LVDCI_18	1.8	1.8	N/R	Series
LVDCI_DV2_18	1.8	1.8	N/R	Series
LVDCI_15	1.5	1.5	N/R	Series
LVDCI_DV2_15	1.5	1.5	N/R	Series
GTL_DCI	1.2	1.2	0.8	Single
GTLP_DCI	1.5	1.5	1.0	Single
HSTL_I_DCI	1.5	1.5	0.75	Split
HSTL_II_DCI	1.5	1.5	0.75	Split
HSTL_III_DCI	1.5	1.5	0.9	Single
HSTL_IV_DCI	1.5	1.5	0.9	Single
HSTL_I_DCI_18	1.8	1.8	0.9	Split
HSTL_II_DCI_18	1.8	1.8	0.9	Split
HSTL_III_DCI_18	1.8	1.8	1.08	Single
HSTL_IV_DCI_18	1.8	1.8	1.08	Single
SSTL2_I_DCI(2)	2.5	2.5	1.25	Split
SSTL2_II_DCI(2)	2.5	2.5	1.25	Split
SSTL18_I_DCI (3)	1.8	1.8	0.9	Split
SSTL18_II_DCI	1.8	1.8	0.9	Split
LVDS_25_DCI	2.5	2.5	N/R	Split
LVDSEXT_25_DCI	2.5	2.5	N/R	Split

Notes:
1. LVDCI_XX is LVCMOS output controlled impedance buffers, matching all or half of the reference resistors.
2. These are SSTL compatible.
3. SSTL18_I is not a JEDEC-supported standard.
4. N/R = no requirement.

Logic Resources

IOB blocks include six storage elements, as shown in Figure 10.

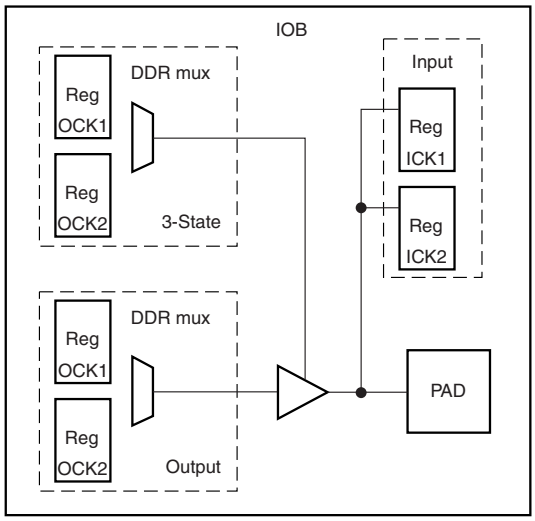


Figure 10: **Virtex-II Pro IOB Block**

Each storage element can be configured either as an edge-triggered D-type flip-flop or as a level-sensitive latch. On the input, output, and 3-state path, one or two DDR registers can be used.

Double data rate is directly accomplished by the two registers on each path, clocked by the rising edges (or falling edges) from two different clock nets. The two clock signals are generated by the DCM and must be 180 degrees out of phase, as shown in Figure 11. There are two input, output, and 3-state data signals, each being alternately clocked out.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 562/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 562 of 947

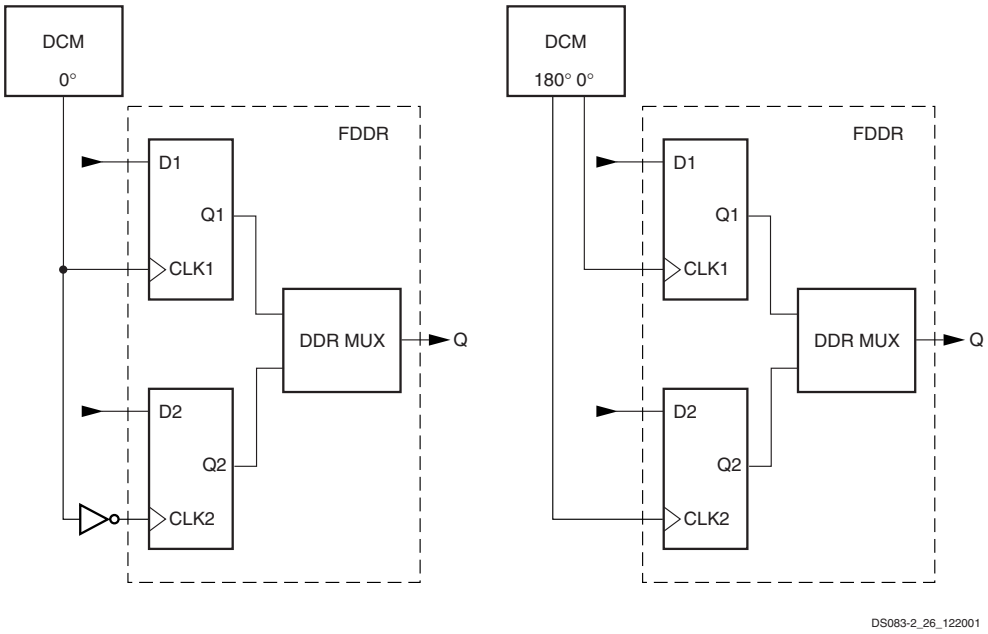


Figure 11: **Double Data Rate Registers**

This DDR mechanism can be used to mirror a copy of the clock on the output. This is useful for propagating a clock along the data that has an identical delay. It is also useful for multiple clock generation, where there is a unique clock driver for every clock load. Virtex-II Pro devices can produce many copies of a clock with very little skew.

Each group of two registers has a clock enable signal (ICE for the input registers, OCE for the output registers, and TCE for the 3-state registers). The clock enable signals are active High by default. If left unconnected, the clock enable for that storage element defaults to the active state.

Each IOB block has common synchronous or asynchronous set and reset (SR and REV signals). Two neighboring IOBs have a shared routing resource connecting the ICLK and OTCLK pins on pairs of IOBs. If two adjacent IOBs using DDR registers do not share the same clock signals on their clock pins (ICLK1, ICLK2, OTCLK1, and OTCLK2), one of the clock signals will be unroutable.

The IOB pairing is identical to the LVDS IOB pairs. Hence, the package pin-out table can also be used for pin assignment to avoid conflict.

SR forces the storage element into the state specified by the SRHIGH or SRLOW attribute. SRHIGH forces a logic 1. SRLOW forces a logic “0”. When SR is used, a second input (REV) forces the storage element into the opposite state. The reset condition predominates over the set condition. The initial state after configuration or global initialization state is defined by a separate INIT0 and INIT1 attribute. By default, the SRLOW attribute forces INIT0, and the SRHIGH attribute forces INIT1.

For each storage element, the SRHIGH, SRLOW, INIT0, and INIT1 attributes are independent. Synchronous or asynchronous set / reset is consistent in an IOB block.

All the control signals have independent polarity. Any inverter placed on a control input is automatically absorbed.

Each register or latch, independent of all other registers or latches, can be configured as follows:

- No set or reset
- Synchronous set
- Synchronous reset
- Synchronous set and reset
- Asynchronous set (preset)
- Asynchronous reset (clear)
- Asynchronous set and reset (preset and clear)

The synchronous reset overrides a set, and an asynchronous clear overrides a preset.

Refer to Figure 12.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 563/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 563 of 947

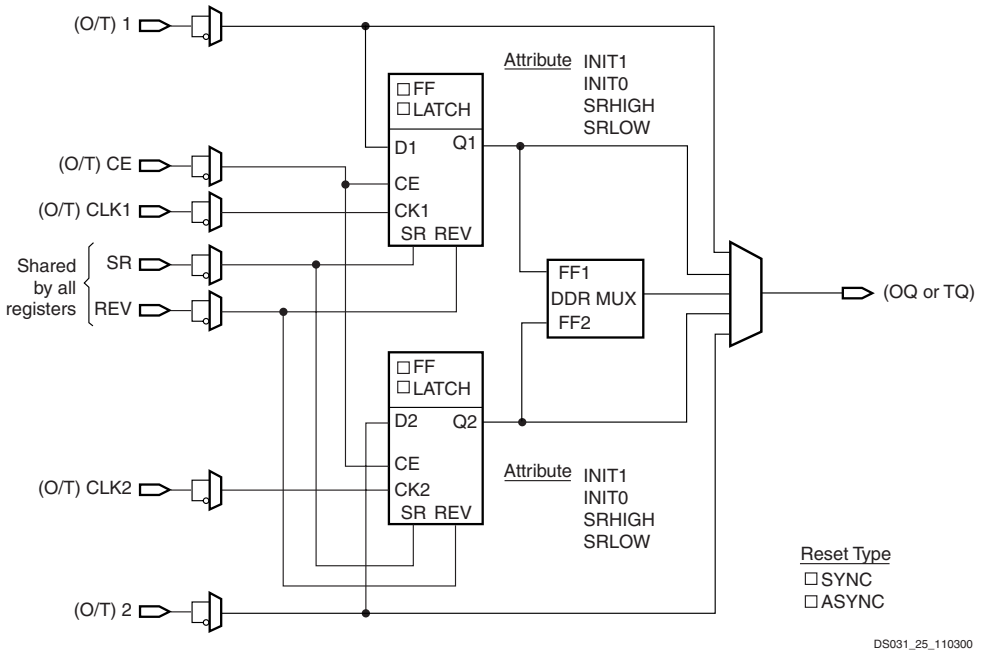


Figure 12: **Register / Latch Configuration in an IOB Block**

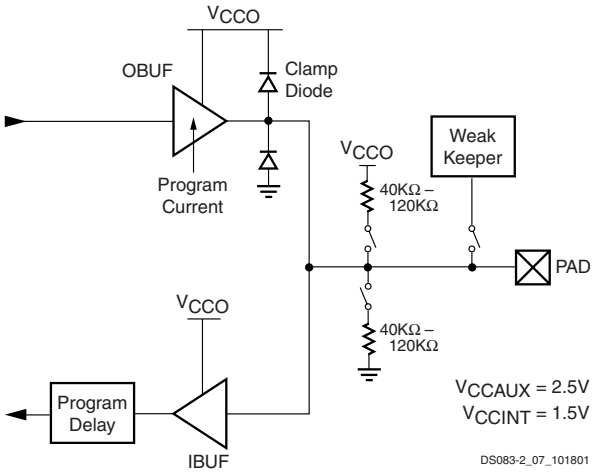


Figure 13: **LVTTL, LVCMOS, or PCI SelectIO-Ultra Standard**

Input/Output Individual Options

Each device pad has optional pull-up/pull-down resistors and weak-keeper circuit in the LVTTL, LVCMOS, and PCI SelectIO-Ultra configurations, as illustrated in Figure 13. Values of the optional pull-up and pull-down resistors fall within a range of 40 KΩ to 120 KΩ when V_{CCO} = 2.5V (from 2.38V to 2.63V only). The clamp diodes are always present, even when power is not.

The optional weak-keeper circuit is connected to each user I/O pad. When selected, the circuit monitors the voltage on the pad and weakly drives the pin High or Low. If the pin is connected to a multiple-source signal, the weak-keeper holds the signal in its last state if all drivers are disabled. Maintaining a valid logic level in this way eliminates bus chatter. An enabled pull-up or pull-down overrides the weak-keeper circuit.

LVCMOS25 sinks and sources current up to 24 mA. The current is programmable (see Table 6). Drive strength and slew rate controls for each output driver minimize bus transients. For LVDCI and LVDCI_DV2 standards, drive strength and slew rate controls are not available.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 564 of 947

Table 6: **LVCMOS Programmable Currents (Sink and Source)**

SelectIO-Ultra	Programmable Current (Worst-Case Guaranteed Minimum)						
LVTTL	2 mA	4 mA	6 mA	8 mA	12 mA	16 mA	24 mA
LVCMOS33	2 mA	4 mA	6 mA	8 mA	12 mA	16 mA	24 mA
LVCMOS25	2 mA	4 mA	6 mA	8 mA	12 mA	16 mA	24 mA
LVCMOS18	2 mA	4 mA	6 mA	8 mA	12 mA	16 mA	n/a
LVCMOS15	2 mA	4 mA	6 mA	8 mA	12 mA	16 mA	n/a

Figure 14 shows the SSTL2, SSTL18, and HSTL configurations. HSTL can sink current up to 48 mA. (HSTL IV)

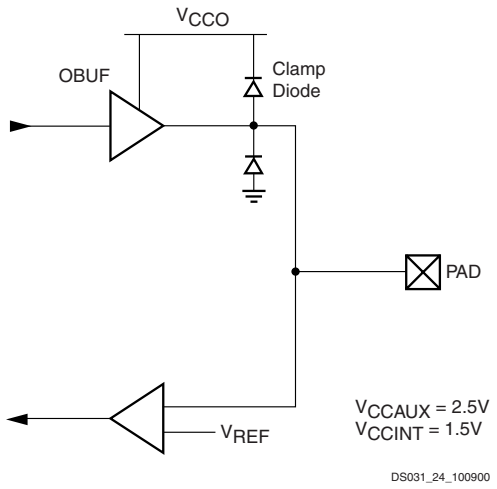


Figure 14: **SSTL or HSTL SelectIO-Ultra Standards**

All pads are protected against damage from electrostatic discharge (ESD) and from over-voltage transients. Virtex-II Pro uses two memory cells to control the configuration of an I/O as an input. This is to reduce the probability of an I/O configured as an input from flipping to an output when subjected to a single event upset (SEU) in space applications.

Prior to configuration, all outputs not involved in configuration are forced into their high-impedance state. The pull-down resistors and the weak-keeper circuits are inactive. The dedicated pin HSWAP_EN controls the pull-up resistors prior to configuration. By default, HSWAP_EN is set High, which disables the pull-up resistors on user I/O pins. When HSWAP_EN is set Low, the pull-up resistors are activated on user I/O pins.

All Virtex-II Pro IOBs (except RocketIO transceiver pins) support IEEE 1149.1 and IEEE 1532 compatible boundary scan testing.

Input Path

The Virtex-II Pro IOB input path routes input signals directly to internal logic and / or through an optional input flip-flop or latch, or through the DDR input registers. An optional delay element at the D-input of the storage element eliminates pad-to-pad hold time. The delay is matched to the internal clock-distribution delay of the Virtex-II Pro device, and when used, assures that the pad-to-pad hold time is zero.

Each input buffer can be configured to conform to any of the low-voltage signaling standards supported. In some of these standards the input buffer utilizes a user-supplied threshold voltage, V_{REF}. The need to supply V_{REF} imposes constraints on which standards can be used in the same bank. See I/O banking description.

Output Path

The output path includes a 3-state output buffer that drives the output signal onto the pad. The output and / or the 3-state signal can be routed to the buffer directly from the internal logic or through an output / 3-state flip-flop or latch, or through the DDR output / 3-state registers.

Each output driver can be individually programmed for a wide range of low-voltage signaling standards. In most signaling standards, the output High voltage depends on an externally supplied V_{CCO} voltage. The need to supply V_{CCO} imposes constraints on which standards can be used in the same bank. See I/O banking description.

I/O Banking

Some of the I/O standards described above require V_{CCO} and V_{REF} voltages. These voltages are externally supplied and connected to device pins that serve groups of IOB blocks, called banks. Consequently, restrictions exist about which I/O standards can be combined within a given bank.

Eight I/O banks result from dividing each edge of the FPGA into two banks, as shown in Figure 15 and Figure 16. Each bank has multiple V_{CCO} pins, all of which must be connected to the same voltage. This voltage is determined by the output standards in use.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 565/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 565 of 947

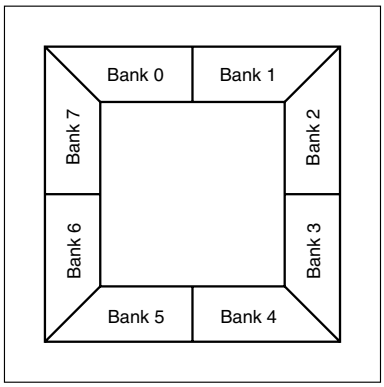


Figure 15: **I/O Banks: Wire-Bond Packages (FG) Top View**

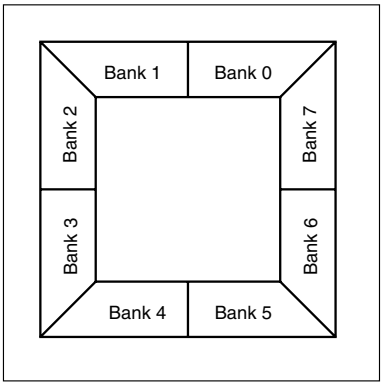


Figure 16: **I/O Banks: Flip-Chip Packages (FF) Top View**

Some input standards require a user-supplied threshold voltage (V_{REF}), and certain user-I/O pins are automatically configured as V_{REF} inputs. Approximately one in six of the I/O pins in the bank assume this role.

V_{REF} pins within a bank are interconnected internally, and thus only one V_{REF} voltage can be used within each bank. However, for correct operation, all V_{REF} pins in the bank must be connected to the external reference voltage source.

The V_{CCO} and the V_{REF} pins for each bank appear in the device pinout tables. Within a given package, the number of V_{REF} and V_{CCO} pins can vary depending on the size of device. In larger devices, more I/O pins convert to V_{REF} pins. Since these are always a superset of the V_{REF} pins used for smaller devices, it is possible to design a PCB that permits migration to a larger device if necessary.

All V_{REF} pins for the largest device anticipated must be connected to the V_{REF} voltage and not used for I/O. In smaller devices, some V_{CCO} pins used in larger devices do not connect within the package. These unconnected pins can be left unconnected externally, or, if necessary, they can be connected to V_{CCO} to permit migration to a larger device.

Rules for Combining I/O Standards in the Same Bank

The following rules must be obeyed to combine different input, output, and bi-directional standards in the same bank:

1. **Combining output standards only.** Output standards with the same output V_{CCO} requirement can be combined in the same bank.
   Compatible example:
   SSTL2_I and LVDS_25_DCI outputs
   Incompatible example:
   SSTL2_I (output V_{CCO} = 2.5V) and
   LVCMOS33 (output V_{CCO} = 3.3V) outputs
2. **Combining input standards only.** Input standards with the same input V_{CCO} and input V_{REF} requirements can be combined in the same bank.
   Compatible example:
   LVCMOS15 and HSTL_IV inputs
   Incompatible example:
   LVCMOS15 (input V_{CCO} = 1.5V) and
   LVCMOS18 (input V_{CCO} = 1.8V) inputs
   Incompatible example:
   HSTL_I_DCI_18 (V_{REF} = 0.9V) and
   HSTL_IV_DCI_18 (V_{REF} = 1.1V) inputs
3. **Combining input standards and output standards.** Input standards and output standards with the same input V_{CCO} and output V_{CCO} requirement can be combined in the same bank.
   Compatible example:
   LVDS_25 output and HSTL_I input
   Incompatible example:
   LVDS_25 output (output V_{CCO} = 2.5V) and
   HSTL_I_DCI_18 input (input V_{CCO} = 1.8V)
4. **Combining bi-directional standards with input or output standards.** When combining bi-directional I/O with other standards, make sure the bi-directional standard can meet rules 1 through 3 above.
5. **Additional rules for combining DCI I/O standards.**
   a. No more than one Single Termination type (input or output) is allowed in the same bank.
      Incompatible example:
      HSTL_IV_DCI input and HSTL_III_DCI input
   b. No more than one Split Termination type (input or output) is allowed in the same bank.
      Incompatible example:
      HSTL_I_DCI input and HSTL_II_DCI input

The implementation tools will enforce the above design rules.

Table 7, page 19, summarizes all standards and voltage supplies.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 566/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 566 of 947

Table 7: **Summary of Voltage Supply Requirements for All Input and Output Standards**

I/O Standard	V_{CCO}		V_{REF}	Termination Type	
	Output	Input	Input	Output	Input
LVTTL	3.3[1]	3.3	N/R[2]	N/R	N/R
LVCMOS33			N/R	N/R	N/R
LVDCI_33			N/R	Series	N/R
PCIX			N/R	N/R	N/R
PCI33_3			N/R	N/R	N/R
PCI66_3			N/R	N/R	N/R
LVDS_25	2.5	Note (3)	N/R	N/R	N/R
LVDSEXT_25			N/R	N/R	N/R
LDT_25			N/R	N/R	N/R
ULVDS_25			N/R	N/R	N/R
BLVDS_25			N/R	N/R	N/R
LVPECL_25			N/R	N/R	N/R
SSTL2_I			1.25	N/R	N/R
SSTL2_II			1.25	N/R	N/R
LVCMOS25		2.5	N/R	N/R	N/R
LVDCI_25			N/R	Series	N/R
LVDCI_DV2_25			N/R	Series	N/R
LVDS_25_DCI			N/R	N/R	Split
LVDSEXT_25_DCI			N/R	N/R	Split
SSTL2_I_DCI			1.25	N/R	Split
SSTL2_II_DCI			1.25	Split	Split
LVDS_25_DT			N/R	N/R	N/R
LVDSEXT_25_DT			N/R	N/R	N/R
LDT_25_DT			N/R	N/R	N/R
ULVDS_25_DT			N/R	N/R	N/R
HSTL_III_18	1.8	Note (3)	1.1	N/R	N/R
HSTL_IV_18			1.1	N/R	N/R
HSTL_I_18			0.9	N/R	N/R
HSTL_II_18			0.9	N/R	N/R
SSTL18_I			0.9	N/R	N/R
SSTL18_II			0.9	N/R	N/R
LVCMOS18		1.8	N/R	N/R	N/R
LVDCI_18			N/R	Series	N/R
LVDCI_DV2_18			N/R	Series	N/R
HSTL_III_DCI_18			1.1	N/R	Single
HSTL_IV_DCI_18			1.1	Single	Single
HSTL_I_DCI_18			0.9	N/R	Split
HSTL_II_DCI_18			0.9	Split	Split
SSTL18_I_DCI			0.9	N/R	Split
SSTL18_II_DCI			0.9	Split	Split
HSTL_III	1.5	Note (3)	0.9	N/R	N/R
HSTL_IV			0.9	N/R	N/R
HSTL_I			0.75	N/R	N/R
HSTL_II			0.75	N/R	N/R
LVCMOS15		1.5	N/R	N/R	N/R
LVDCI_15			N/R	Series	N/R
LVDCI_DV2_15			N/R	Series	N/R
GTLP_DCI			1	Single	Single
HSTL_III_DCI			0.9	N/R	Single
HSTL_IV_DCI			0.9	Single	Single
HSTL_I_DCI			0.75	N/R	Split
HSTL_II_DCI			0.75	Split	Split
GTL_DCI	1.2	1.2	0.8	Single	Single
GTLP	N/R	Note (3)	1	N/R	N/R
GTL			0.8	N/R	N/R

Notes:
1. See application note XAPP653 for detailed information.
2. N/R = no requirement.
3. Pin voltage must not exceed V_{CCO}.

Digitally Controlled Impedance (DCI)

Today's chip output signals with fast edge rates require termination to prevent reflections and maintain signal integrity. High pin count packages (especially ball grid arrays) can not accommodate external termination resistors.

Virtex-II Pro XCITE DCI provides controlled impedance drivers and on-chip termination for single-ended and differential I/Os. This eliminates the need for external resistors and improves signal integrity. The DCI feature can be used on any IOB by selecting one of the DCI I/O standards.

When applied to inputs, DCI provides input parallel termination. When applied to outputs, DCI provides controlled impedance drivers (series termination) or output parallel termination.

DCI operates independently on each I/O bank. When a DCI I/O standard is used in a particular I/O bank, external reference resistors must be connected to two dual-function pins on the bank. These resistors, voltage reference of N transistor (VRN) and the voltage reference of P transistor (VRP) are shown in Figure 17.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 567/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 567 of 947

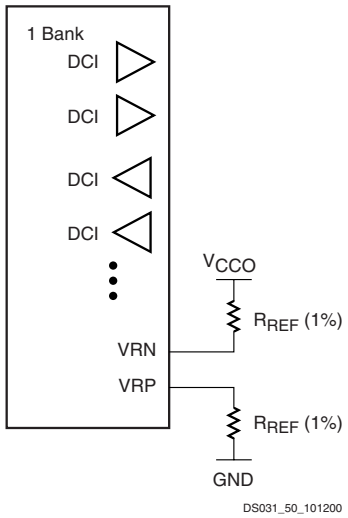


Figure 17: **DCI in a Virtex-II Pro Bank**

When used with a terminated I/O standard, the value of the resistors are specified by the standard (typically 50Ω). When used with a controlled impedance driver, the resistors set the output impedance of the driver within the specified range (20Ω to 100Ω). For all series and parallel terminations listed in Table 8 and Table 9, the reference resistors must have the same value for any given bank. One percent resistors are recommended.

The DCI system adjusts the I/O impedance to match the two external reference resistors, or half of the reference resistors, and compensates for impedance changes due to voltage and/or temperature fluctuations. The adjustment is done by turning parallel transistors in the IOB on or off.

Controlled Impedance Drivers (Series Termination)

DCI can be used to provide a buffer with a controlled output impedance. It is desirable for this output impedance to match the transmission line impedance (Z_0). Virtex-II Pro input buffers also support LVDCI and LVDCI_DV2 I/O standards.

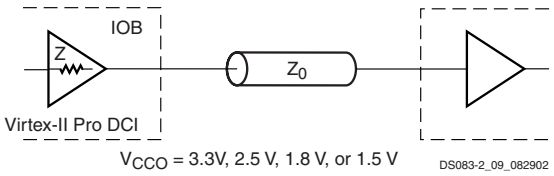


Figure 18: **Internal Series Termination**

Table 8: **SelectIO-Ultra Controlled Impedance Buffers**

V_{CCO}	DCI	DCI Half Impedance
3.3V	LVDCI_33	N/A
2.5V	LVDCI_25	LVDCI_DV2_25
1.8V	LVDCI_18	LVDCI_DV2_18
1.5V	LVDCI_15	LVDCI_DV2_15

Controlled Impedance Terminations (Parallel Termination)

DCI also provides on-chip termination for SSTL2, SSTL18, HSTL (Class I, II, III, or IV), LVDS_25, LVDSEXT_25, and GTL/GTLP receivers or transmitters on bidirectional lines. Table 9 and Table 10 list the on-chip parallel terminations available in Virtex-II Pro devices. V_{CCO} must be set according to Table 5. There is a V_{CCO} requirement for GTL_DCI and GTLP_DCI, due to the on-chip termination resistor.

Table 9: **SelectIO-Ultra Buffers With On-Chip Parallel Termination**

I/O Standard	External Termination	On-Chip Termination
SSTL2 Class I	SSTL2_I	SSTL2_I_DCI(1)
SSTL2 Class II	SSTL2_II	SSTL2_II_DCI(1)
SSTL18 Class I	SSTL18_I	SSTL18_I_DCI
SSTL18 Class II	SSTL18_II	SSTL18_II_DCI
HSTL Class I	HSTL_I	HSTL_I_DCI
	HSTL_I_18	HSTL_I_DCI_18
HSTL Class II	HSTL_II	HSTL_II_DCI
	HSTL_II_18	HSTL_II_DCI_18
HSTL Class III	HSTL_III	HSTL_III_DCI
	HSTL_III_18	HSTL_III_DCI_18
HSTL Class IV	HSTL_IV	HSTL_IV_DCI
	HSTL_IV_18	HSTL_IV_DCI_18
GTL	GTL	GTL_DCI
GTLP	GTLP	GTLP_DCI

Notes:
1. SSTL compatible.

Table 10: **SelectIO-Ultra Differential Buffers With On-Chip Termination**

I/O Standard	External Termination	On-Chip Termination
LVDS	LVDS_25	LVDS_25_DCI
LVDSEXT	LVDSEXT_25	LVDSEXT_25_DCI

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 568/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 568 of 947

Figure 19 provides examples illustrating the use of the HSTL_I_DCI, HSTL_II_DCI, HSTL_III_DCI, and HSTL_IV_DCI I/O standards. For a complete list, see the *Virtex-II Pro Platform FPGA User Guide*.


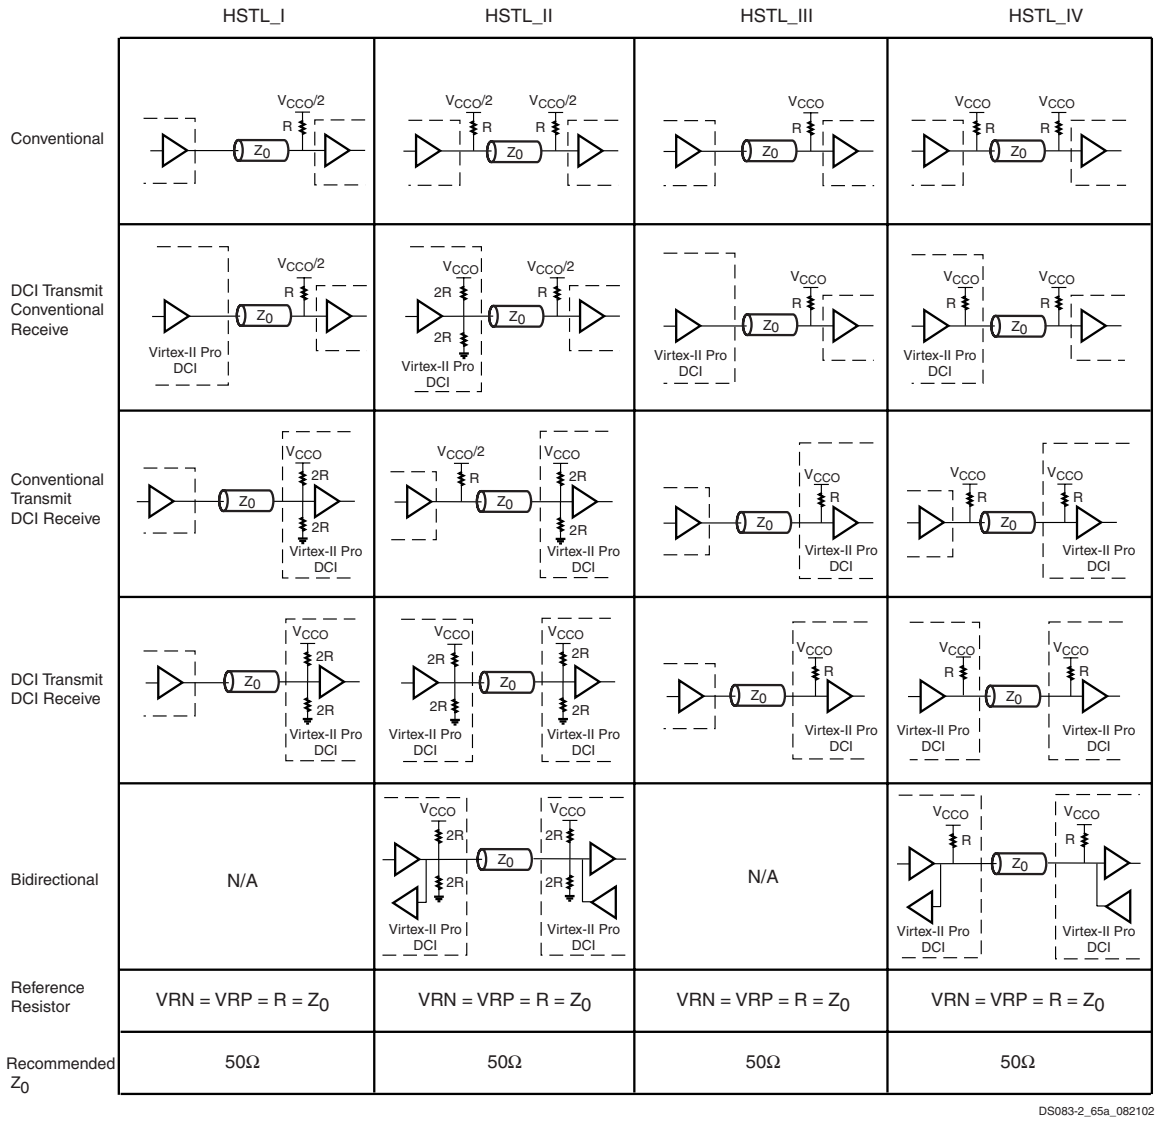


Figure 19: **HSTL DCI Usage Examples**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 569 of 947

Figure 20 provides examples illustrating the use of the SSTL2_I_DCI, SSTL2_II_DCI, SSTL18_I_DCI, and SSTL18_II_DCI I/O standards. For a complete list, see the *Virtex-II Pro Platform FPGA User Guide.*

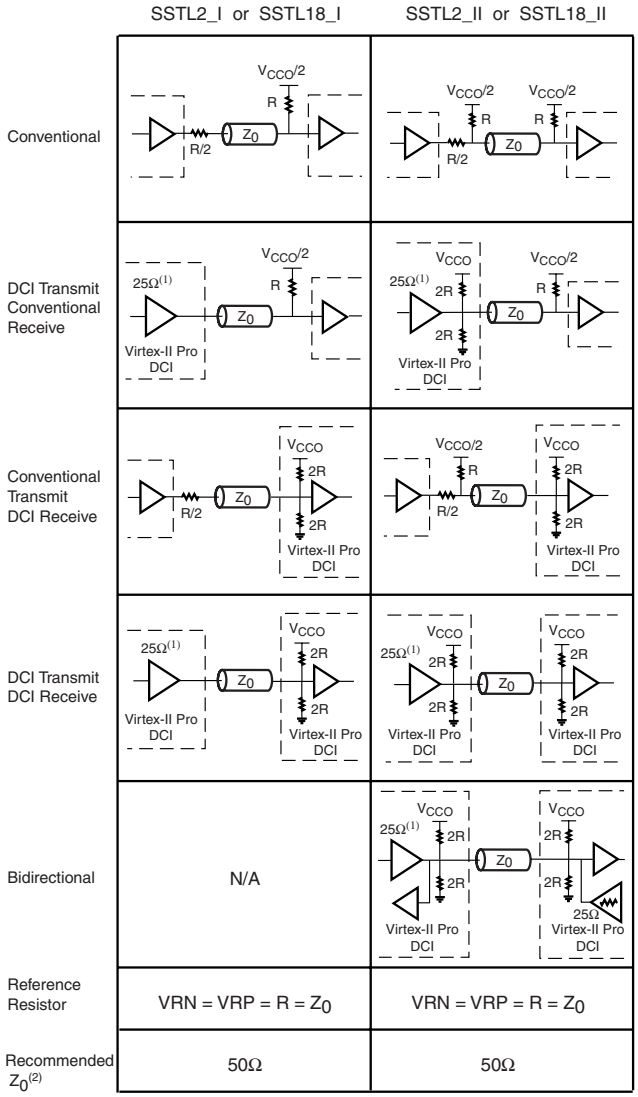

Notes:
1. The SSTL-compatible 25Ω series resistor is accounted for in the DCI buffer, and it is not DCI controlled.
2. Z_0 is the recommended PCB trace impedance.

Figure 20: **SSTL DCI Usage Examples**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 570 of 947

Figure 21 provides examples illustrating the use of the LVDS_25_DCI and LVDSEXT_25_DCI I/O standards. For a complete list, see the *Virtex-II Pro Platform FPGA User Guide.*

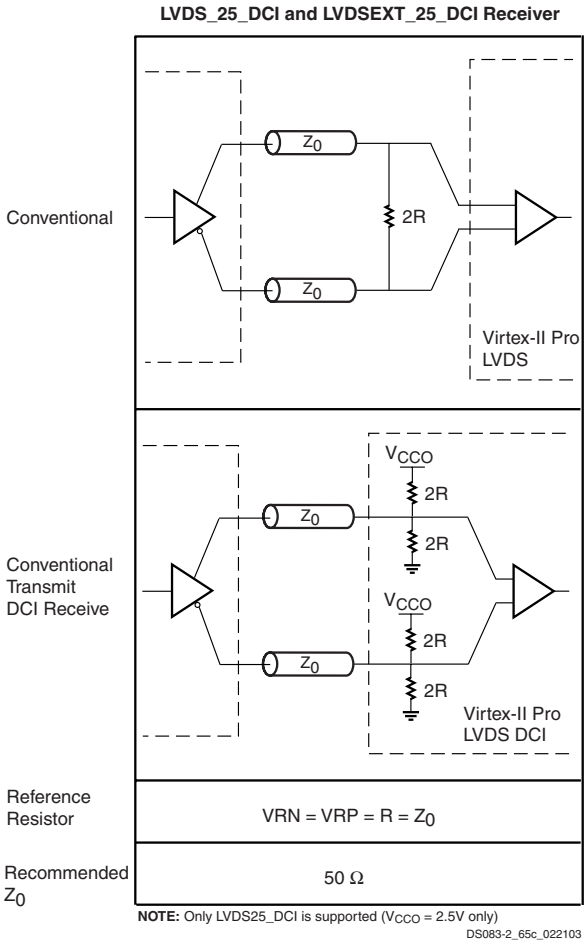


Figure 21: **LVDS DCI Usage Examples**

On-Chip Differential Termination

Virtex-II Pro provides a true 100Ω differential termination (DT) across the input differential receiver terminals. The LVDS_25_DT, LVDSEXT_25_DT, LDT_25_DT, and ULVDS_25_DT standards support on-chip differential termination.

The on-chip input differential termination in Virtex-II Pro provides major advantages over the external resistor or the DCI termination solution:

- Eliminates the stub at the receiver completely and therefore greatly improve signal integrity
- Consumes less power than DCI termination
- Supports LDT (not supported by DCI termination)
- Frees up VRP/VRN pins

Figure 22 provides examples illustrating the use of the LVDS_25_DT, LVDSEXT_25_DT, LDT_25_DT, and ULVDS_25_DT I/O standards. For further details, refer to **Solution Record 17244**. Also see the ***Virtex-II Pro Platform FPGA User Guide*** for more design information.

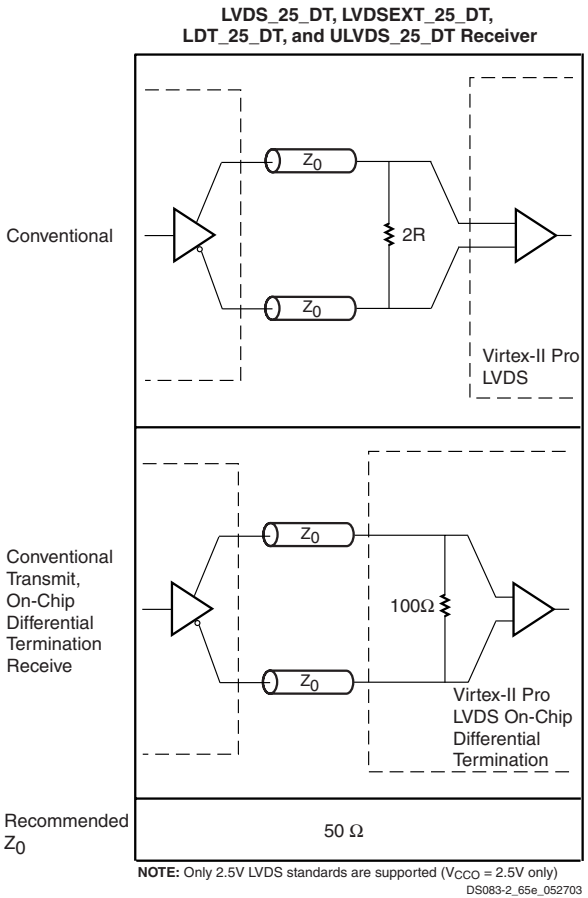


Figure 22: **LVDS Differential Termination Usage Examples**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 571 of 947

Configurable Logic Blocks (CLBs)

The Virtex-II Pro configurable logic blocks (CLB) are organized in an array and are used to build combinatorial and synchronous logic designs. Each CLB element is tied to a switch matrix to access the general routing matrix, as shown in Figure 23.

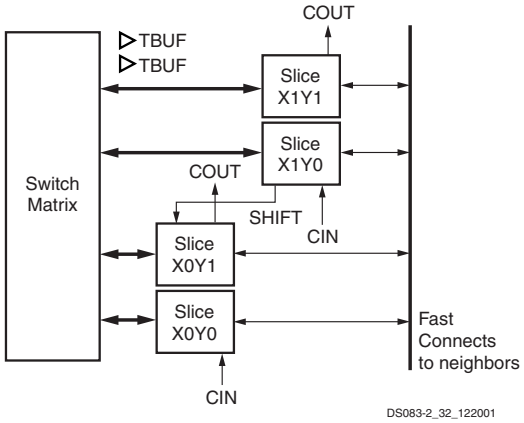


Figure 23: **Virtex-II Pro CLB Element**

A CLB element comprises 4 similar slices, with fast local feedback within the CLB. The four slices are split in two columns of two slices with two independent carry logic chains and one common shift chain.

Slice Description

Each slice includes two 4-input function generators, carry logic, arithmetic logic gates, wide function multiplexers and two storage elements. As shown in Figure 24, each 4-input function generator is programmable as a 4-input LUT, 16 bits of distributed SelectRAM+ memory, or a 16-bit variable-tap shift register element.

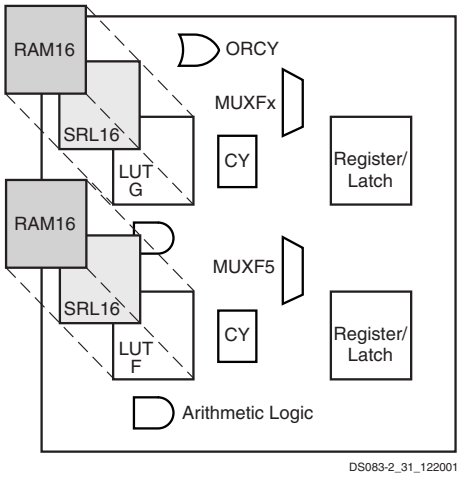


Figure 24: **Virtex-II Pro Slice Configuration**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 572/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 572 of 947

The output from the function generator in each slice drives both the slice output and the D input of the storage element. Figure 25 shows a more detailed view of a single slice.

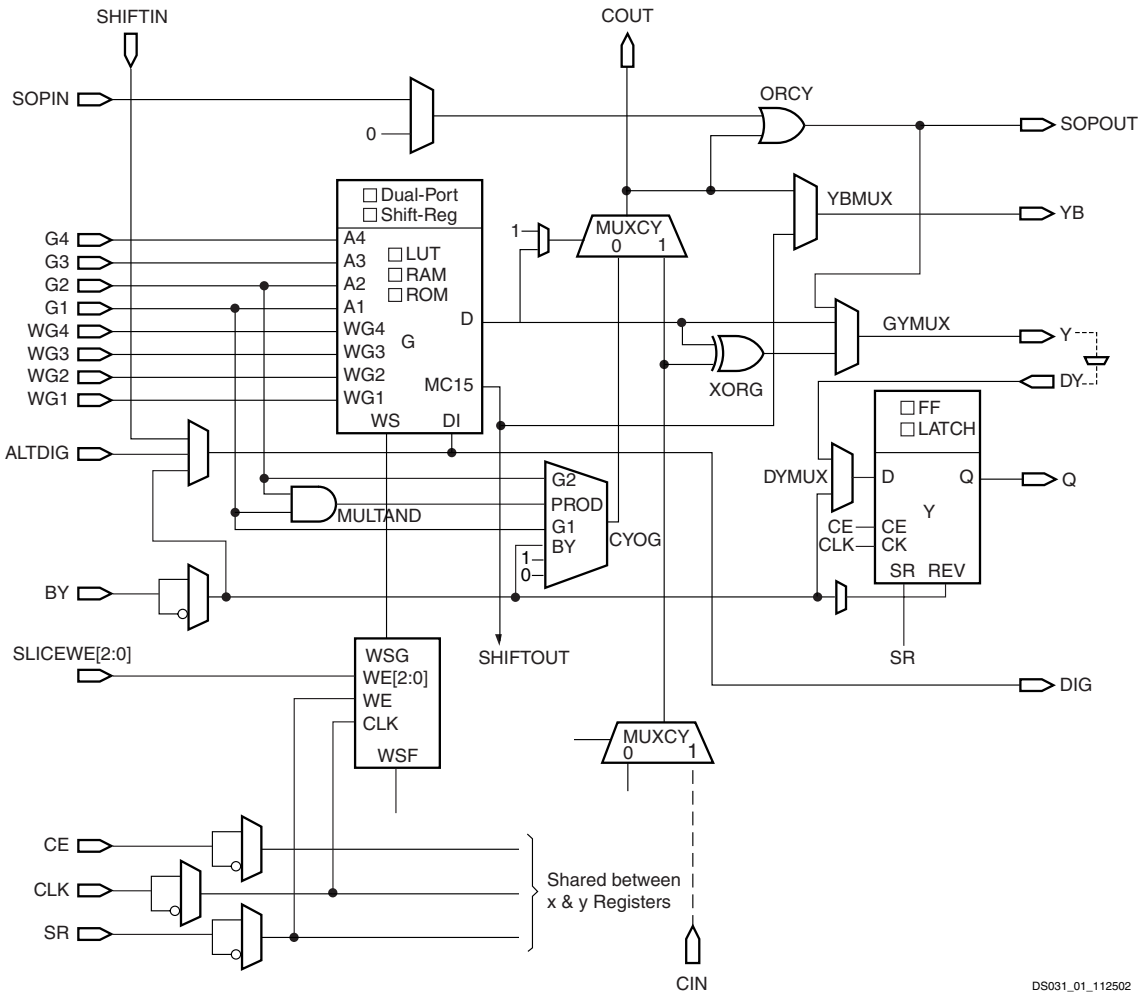


Figure 25: **Virtex-II Pro Slice (Top Half)**

Configurations

Look-Up Table

Virtex-II Pro function generators are implemented as 4-input look-up tables (LUTs). Four independent inputs are provided to each of the two function generators in a slice (F and G). These function generators are each capable of implementing any arbitrarily defined boolean function of four inputs. The propagation delay is therefore independent of the function implemented. Signals from the function generators can exit the slice (X or Y output), can input the XOR dedicated gate (see arithmetic logic), or input the carry-logic multiplexer (see fast look-ahead carry logic), or feed the D input of the storage element, or go to the MUXF5 (not shown in Figure 25).

In addition to the basic LUTs, the Virtex-II Pro slice contains logic (MUXF5 and MUXFX multiplexers) that combines function generators to provide any function of five, six, seven, or eight inputs. The MUXFX is either MUXF6, MUXF7, or MUXF8 according to the slice considered in the CLB. Selected functions up to nine inputs (MUXF5 multiplexer) can be implemented in one slice. The MUXFX can also be a MUXF6, MUXF7, or MUXF8 multiplexer to map any function of six, seven, or eight inputs and selected wide logic functions.

Register/Latch

The storage elements in a Virtex-II Pro slice can be configured either as edge-triggered D-type flip-flops or as level-sensitive latches. The D input can be directly driven by

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 573/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 573 of 947

the X or Y output via the DX or DY input, or by the slice inputs bypassing the function generators via the BX or BY input. The clock enable signal (CE) is active High by default. If left unconnected, the clock enable for that storage element defaults to the active state.

In addition to clock (CK) and clock enable (CE) signals, each slice has set and reset signals (SR and BY slice inputs). SR forces the storage element into the state specified by the attribute SRHIGH or SRLOW. SRHIGH forces a logic 1 when SR is asserted. SRLOW forces a logic 0. When SR is used, an optional second input (BY) forces the storage element into the opposite state via the REV pin. The reset condition is predominant over the set condition. (See Figure 26.)

The initial state after configuration or global initial state is defined by a separate INIT0 and INIT1 attribute. By default, setting the SRLOW attribute sets INIT0, and setting the SRHIGH attribute sets INIT1.

For each slice, set and reset can be set to be synchronous or asynchronous. Virtex-II Pro devices also have the ability to set INIT0 and INIT1 independent of SRHIGH and SRLOW.

The control signals clock (CLK), clock enable (CE) and set/reset (SR) are common to both storage elements in one slice. All of the control signals have independent polarity. Any inverter placed on a control input is automatically absorbed.

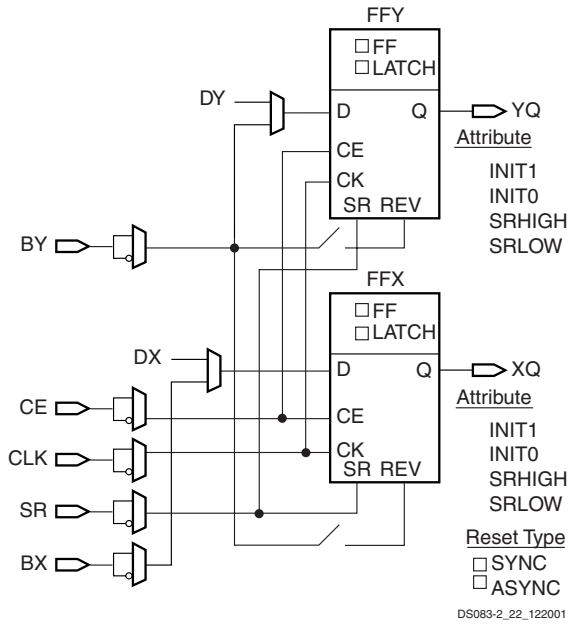


Figure 26: **Register / Latch Configuration in a Slice**

The set and reset functionality of a register or a latch can be configured as follows:

- No set or reset
- Synchronous set
- Synchronous reset
- Synchronous set and reset
- Asynchronous set (preset)
- Asynchronous reset (clear)
- Asynchronous set and reset (preset and clear)

The synchronous reset has precedence over a set, and an asynchronous clear has precedence over a preset.

Distributed SelectRAM+ Memory

Each function generator (LUT) can implement a 16 x 1-bit synchronous RAM resource called a distributed SelectRAM+ element. SelectRAM+ elements are configurable within a CLB to implement the following:

- Single-Port 16 x 8-bit RAM
- Single-Port 32 x 4-bit RAM
- Single-Port 64 x 2-bit RAM
- Single-Port 128 x 1-bit RAM
- Dual-Port 16 x 4-bit RAM
- Dual-Port 32 x 2-bit RAM
- Dual-Port 64 x 1-bit RAM

Distributed SelectRAM+ memory modules are synchronous (write) resources. The combinatorial read access time is extremely fast, while the synchronous write simplifies high-speed designs. A synchronous read can be implemented with a storage element in the same slice. The distributed SelectRAM+ memory and the storage element share the same clock input. A Write Enable (WE) input is active High, and is driven by the SR input.

Table 11 shows the number of LUTs (2 per slice) occupied by each distributed SelectRAM+ configuration.

Table 11: **Distributed SelectRAM+ Configurations**

RAM	Number of LUTs
16 x 1S	1
16 x 1D	2
32 x 1S	2
32 x 1D	4
64 x 1S	4
64 x 1D	8
128 x 1S	8

Notes:
1. S = single-port configuration; D = dual-port configuration

For single-port configurations, distributed SelectRAM+ memory has one address port for synchronous writes and asynchronous reads.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 574/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 574 of 947

For dual-port configurations, distributed SelectRAM+ memory has one port for synchronous writes and asynchronous reads and another port for asynchronous reads. The function generator (LUT) has separated read address inputs (A1, A2, A3, A4) and write address inputs (WG1/WF1, WG2/WF2, WG3/WF3, WG4/WF4).

In single-port mode, read and write addresses share the same address bus. In dual-port mode, one function generator (R/W port) is connected with shared read and write addresses. The second function generator has the A inputs (read) connected to the second read-only port address and the W inputs (write) shared with the first read/write port address.

Figure 27, Figure 28, and Figure 29 illustrate various example configurations.

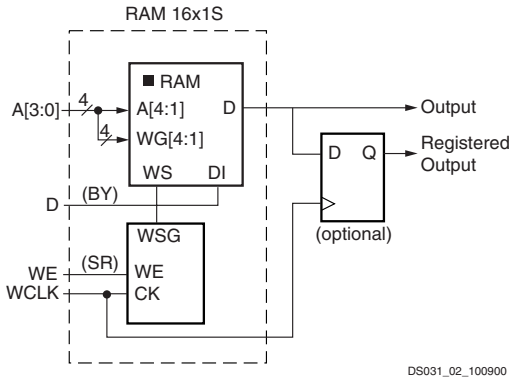


Figure 27: **Distributed SelectRAM+ (RAM16x1S)**

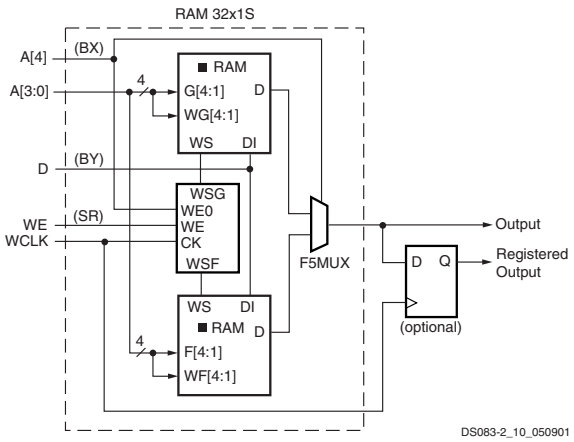


Figure 28: **Single-Port Distributed SelectRAM+ (RAM32x1S)**

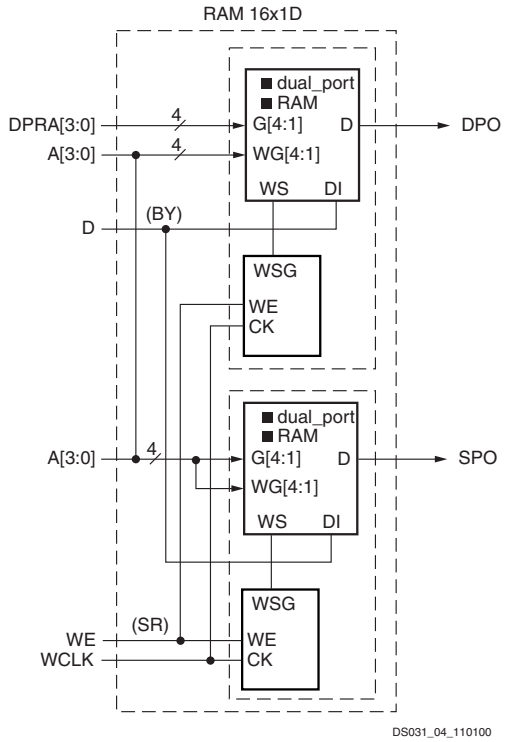


Figure 29: **Dual-Port Distributed SelectRAM+ (RAM16x1D)**

Similar to the RAM configuration, each function generator (LUT) can implement a 16 x 1-bit ROM. Five configurations are available: ROM16x1, ROM32x1, ROM64x1, ROM128x1, and ROM256x1. The ROM elements are cascadable to implement wider or/and deeper ROM. ROM contents are loaded at configuration. Table 12 shows the number of LUTs occupied by each configuration.

Table 12: **ROM Configuration**

ROM	Number of LUTs
16 x 1	1
32 x 1	2
64 x 1	4
128 x 1	8 (1 CLB)
256 x 1	16 (2 CLBs)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 575/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 575 of 947

Shift Registers

Each function generator can also be configured as a 16-bit shift register. The write operation is synchronous with a clock input (CLK) and an optional clock enable, as shown in Figure 30. A dynamic read access is performed through the 4-bit address bus, A[3:0]. The configurable 16-bit shift register cannot be set or reset. The read is asynchronous; however, the storage element or flip-flop is available to implement a synchronous read. Any of the 16 bits can be read out asynchronously by varying the address. The storage element should always be used with a constant address. For example, when building an 8-bit shift register and configuring the addresses to point to the 7th bit, the 8th bit can be the flip-flop. The overall system performance is improved by using the superior clock-to-out of the flip-flops.

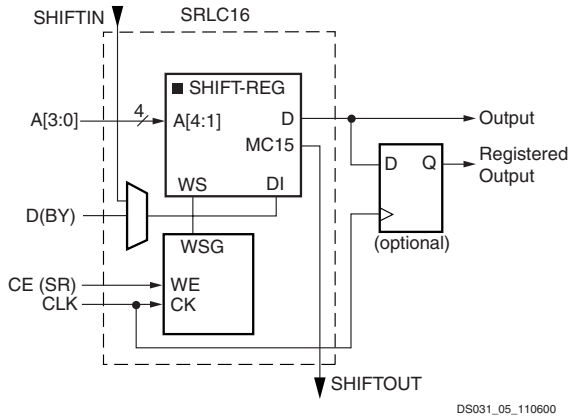


Figure 30: **Shift Register Configurations**

An additional dedicated connection between shift registers allows connecting the last bit of one shift register to the first bit of the next, without using the ordinary LUT output. (See Figure 31.) Longer shift registers can be built with dynamic access to any bit in the chain. The shift register chaining and the MUXF5, MUXF6, and MUXF7 multiplexers allow up to a 128-bit shift register with addressable access to be implemented in one CLB.

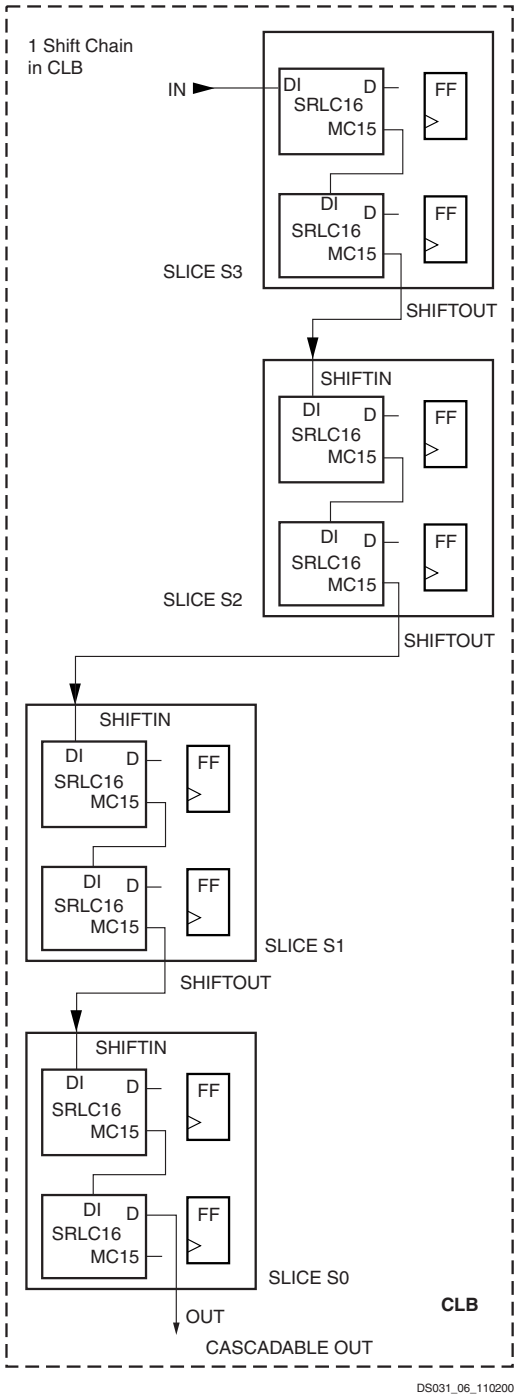


Figure 31: **Cascadable Shift Register**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 576/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 576 of 947

Multiplexers

Virtex-II Pro function generators and associated multiplexers can implement the following:

- 4:1 multiplexer in one slice
- 8:1 multiplexer in two slices
- 16:1 multiplexer in one CLB element (4 slices)
- 32:1 multiplexer in two CLB elements (8 slices)

Each Virtex-II Pro slice has one MUXF5 multiplexer and one MUXFX multiplexer. The MUXFX multiplexer implements the MUXF6, MUXF7, or MUXF8, as shown in Figure 32. Each CLB element has two MUXF6 multiplexers, one MUXF7 multiplexer and one MUXF8 multiplexer. Examples of multiplexers are shown in the *Virtex-II Pro Platform FPGA User Guide*. Any LUT can implement a 2:1 multiplexer.

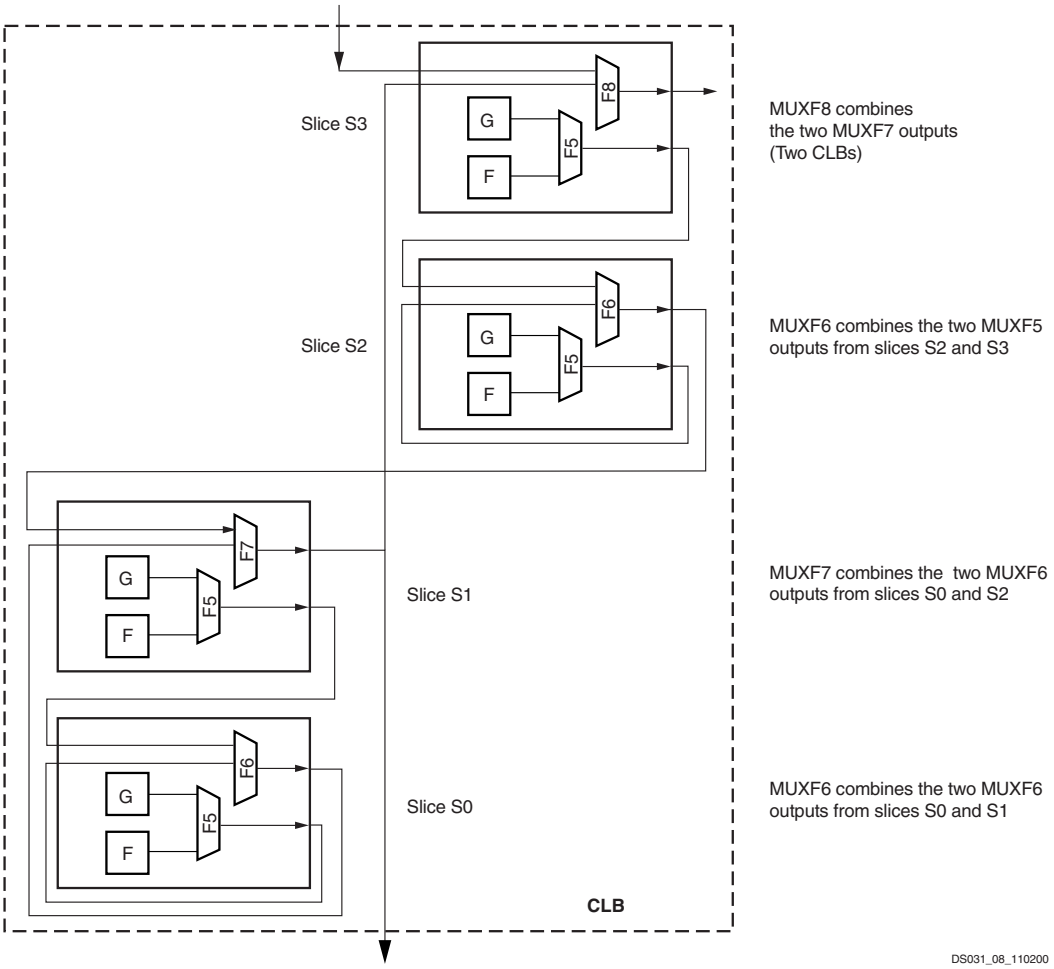


Figure 32: **MUXF5 and MUXFX multiplexers**

Fast Lookahead Carry Logic

Dedicated carry logic provides fast arithmetic addition and subtraction. The Virtex-II Pro CLB has two separate carry chains, as shown in the Figure 33.

The height of the carry chains is two bits per slice. The carry chain in the Virtex-II Pro device is running upward. The dedicated carry path and carry multiplexer (MUXCY) can also be used to cascade function generators for implementing wide logic functions.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 577/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 577 of 947

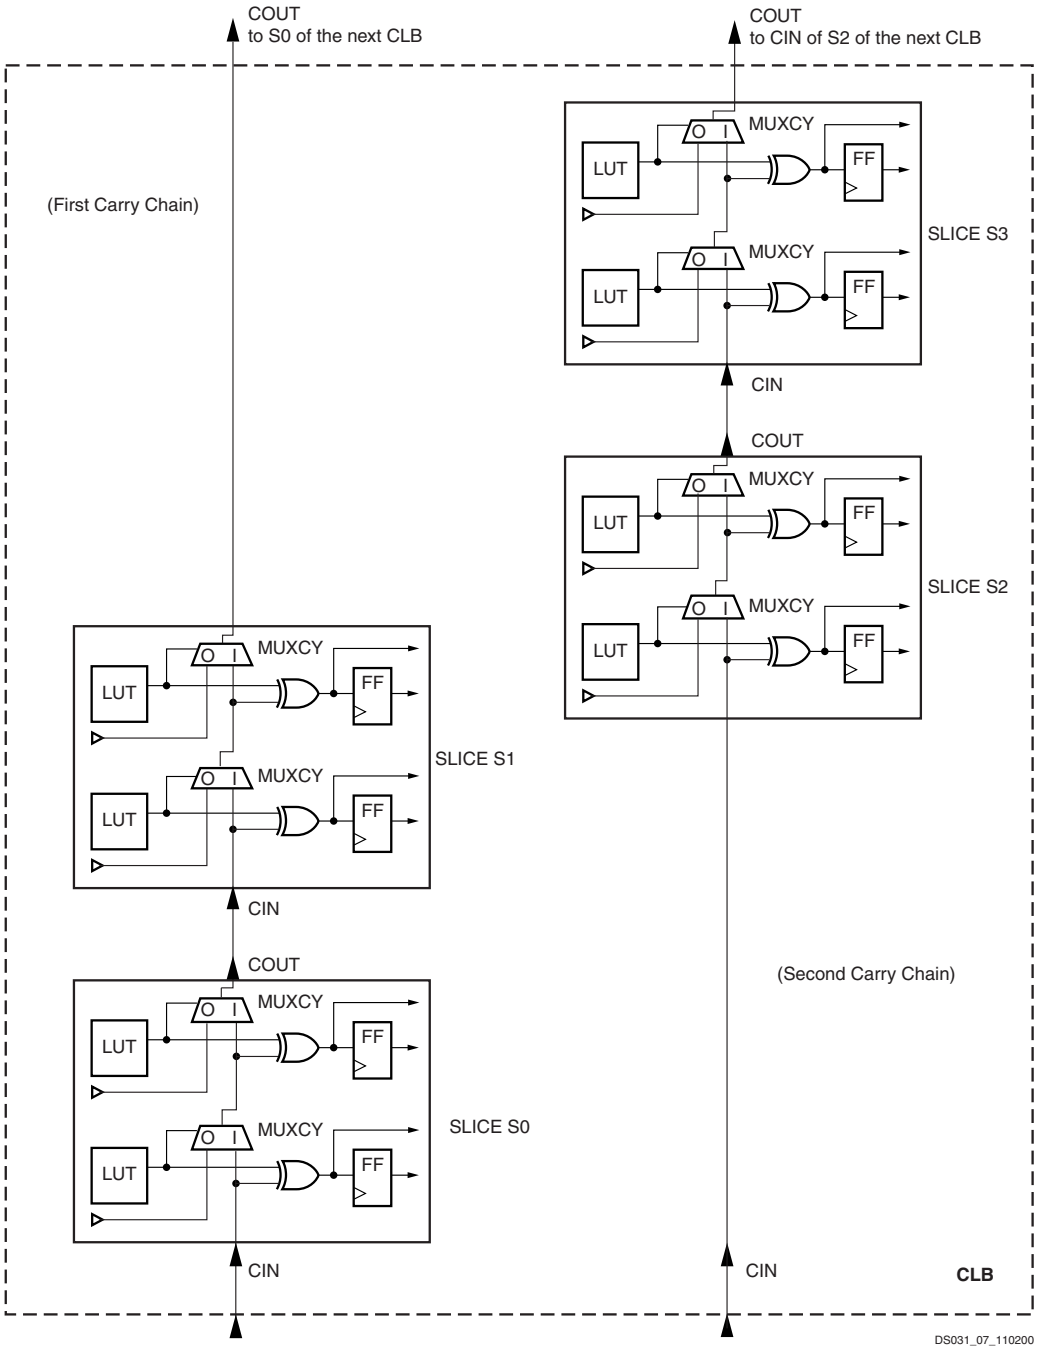


Figure 33: **Fast Carry Logic Path**

Arithmetic Logic

The arithmetic logic includes an XOR gate that allows a 2-bit full adder to be implemented within a slice. In addition, a dedicated AND (MULT_AND) gate (shown in Figure 25) improves the efficiency of multiplier implementation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 578 of 947

Sum of Products

Each Virtex-II Pro slice has a dedicated OR gate named ORCY, ORing together outputs from the slices carryout and the ORCY from an adjacent slice. The ORCY gate with the dedicated Sum of Products (SOP) chain are designed for implementing large, flexible SOP chains. One input of each ORCY is connected through the fast SOP chain to the output of the previous ORCY in the same slice row. The second input is connected to the output of the top MUXCY in the same slice, as shown in Figure 34.

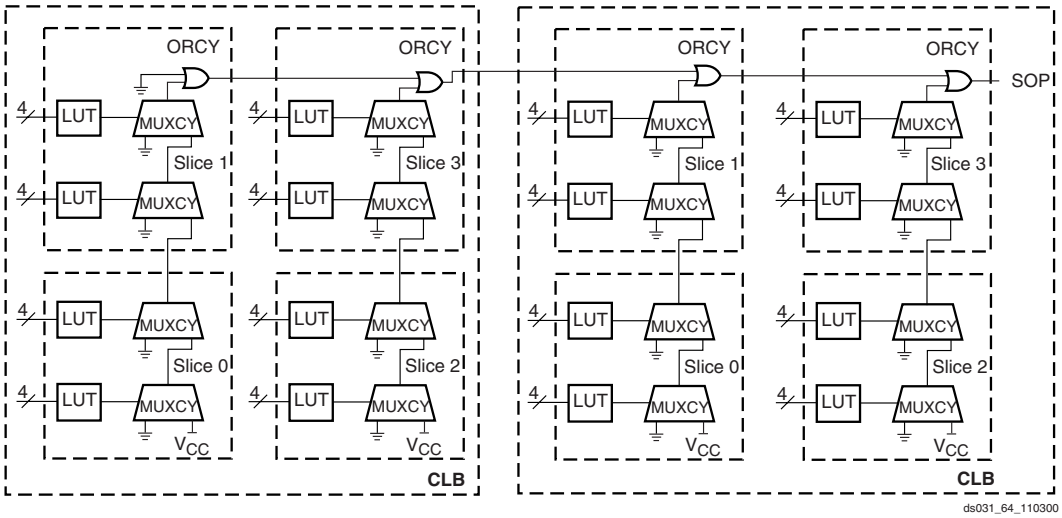


Figure 34: **Horizontal Cascade Chain**

LUTs and MUXCYs can implement large AND gates or other combinatorial logic functions. Figure 35 illustrates LUT and MUXCY resources configured as a 16-input AND gate.

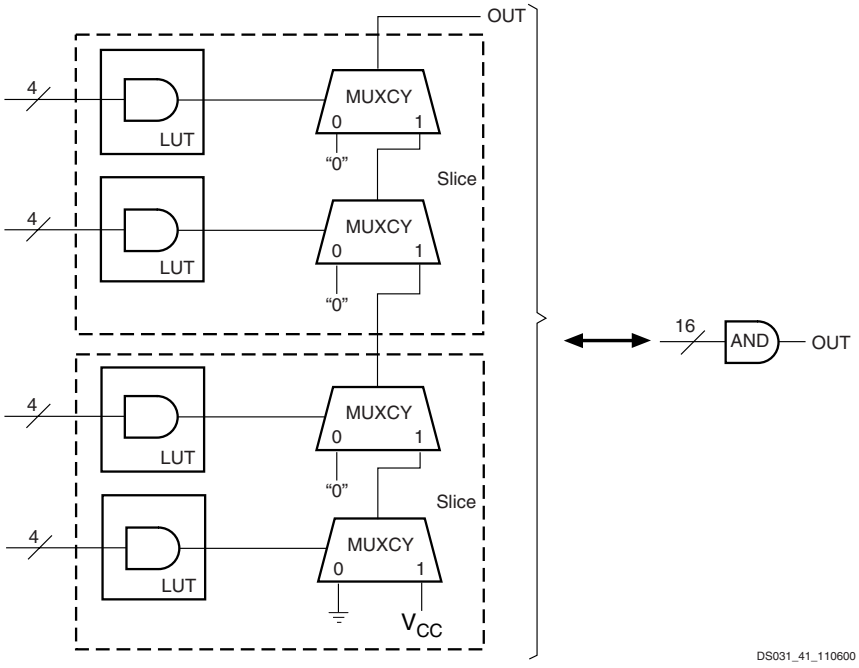


Figure 35: **Wide-Input AND Gate (16 Inputs)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 579/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 579 of 947

3-State Buffers

Introduction

Each Virtex-II Pro CLB contains two 3-state drivers (TBUFs) that can drive on-chip buses. Each 3-state buffer has its own 3-state control pin and its own input pin.

Each of the four slices have access to the two 3-state buffers through the switch matrix, as shown in Figure 36. TBUFs in neighboring CLBs can access slice outputs by direct connects. The outputs of the 3-state buffers drive horizontal routing resources used to implement 3-state buses.

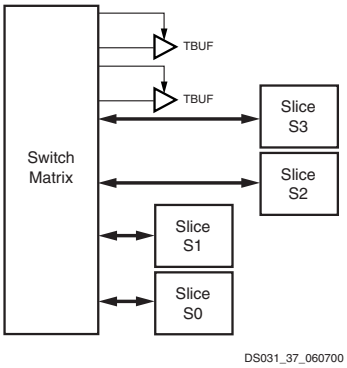


Figure 36: **Virtex-II Pro 3-State Buffers**

The 3-state buffer logic is implemented using AND-OR logic rather than 3-state drivers, so that timing is more predictable and less load dependant especially with larger devices.

Locations / Organization

Four horizontal routing resources per CLB are provided for on-chip 3-state buses. Each 3-state buffer has access alternately to two horizontal lines, which can be partitioned as shown in Figure 37. The switch matrices corresponding to SelectRAM+ memory and multiplier or I/O blocks are skipped.

Number of 3-State Buffers

Table 13 shows the number of 3-state buffers available in each Virtex-II Pro device. The number of 3-state buffers is twice the number of CLB elements.

Table 13: **Virtex-II Pro 3-State Buffers**

Device	3-State Buffers per Row	Total Number of 3-State Buffers
XC2VP2	44	704
XC2VP4	44	1,760
XC2VP7	68	2,720
XC2VP20	92	5,152
XC2VP30	92	6,848
XC2VP40	116	9,696
XC2VP50	140	11,808
XC2VP70	164	16,544
XC2VP100	188	22,048
XC2VP125	212	27,808

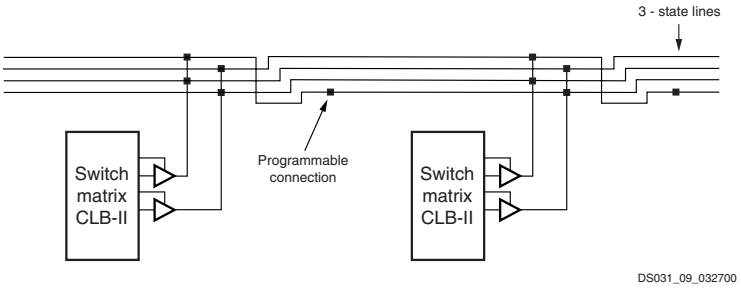


Figure 37: **3-State Buffer Connection to Horizontal Lines**

CLB/Slice Configurations

Table 14 summarizes the logic resources in one CLB. All of the CLBs are identical and each CLB or slice can be implemented in one of the configurations listed. Table 15 shows the available resources in all CLBs.

Table 14: **Logic Resources in One CLB**

Slices	LUTs	Flip-Flops	MULT_ANDs	Arithmetic & Carry-Chains	SOP Chains	Distributed SelectRAM+	Shift Registers	TBUF
4	8	8	8	2	2	128 bits	128 bits	2

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 580 of 947

Table 15: **Virtex-II Pro Logic Resources Available in All CLBs**

Device	CLB Array: Row x Column	Number of Slices	Number of LUTs	Max Distributed SelectRAM+ or Shift Register (bits)	Number of Flip-Flops	Number of Carry Chains(1)	Number of SOP Chains(1)
XC2VP2	16 x 22	1,408	2,816	45,056	2,816	44	32
XC2VP4	40 x 22	3,008	6,016	96,256	6,016	44	80
XC2VP7	40 x 34	4,928	9,856	157,696	9,856	68	80
XC2VP20	56 x 46	9,280	18,560	296,960	18,560	92	112
XC2VP30	80 x 46	13,696	27,392	438,272	27,392	92	160
XC2VP40	88 x 58	19,392	38,784	620,544	38,784	116	176
XC2VP50	88 x 70	23,616	47,232	755,712	47,232	140	176
XC2VP70	104 x 82	33,088	66,176	1,058,816	66,176	164	208
XC2VP100	120 x 94	44,096	88,192	1,411,072	88,192	188	240
XC2VP125	136 x 106	55,616	111,232	1,779,712	111,232	212	272

Notes:
1. The carry-chains and SOP chains can be split or cascaded.

18 Kb Block SelectRAM+ Resources

Introduction

Virtex-II Pro devices incorporate large amounts of 18 Kb block SelectRAM+ resources. These complement the distributed SelectRAM+ resources that provide shallow RAM structures implemented in CLBs. Each Virtex-II Pro block SelectRAM+ resource is an 18 Kb true dual-port RAM with two independently clocked and independently controlled synchronous ports that access a common storage area. Both ports are functionally identical. CLK, EN, WE, and SSR polarities are defined through configuration.

Each port has the following types of inputs: Clock and Clock Enable, Write Enable, Set/Reset, and Address, as well as separate Data/parity data inputs (for write) and Data/parity data outputs (for read).

Operation is synchronous; the block SelectRAM+ behaves like a register. Control, address and data inputs must (and need only) be valid during the set-up time window prior to a rising (or falling, a configuration option) clock edge. Data outputs change as a result of the same clock edge.

Configuration

Virtex-II Pro block SelectRAM+ supports various configurations, including single- and dual-port RAM and various data/address aspect ratios. Supported memory configurations for single- and dual-port modes are shown in Table 16.

Table 16: **Dual- and Single-Port Configurations**

16K x 1 bit	2K x 9 bits
8K x 2 bits	1K x 18 bits
4K x 4 bits	512 x 36 bits

Single-Port Configuration

As a single-port RAM, the block SelectRAM+ has access to the 18 Kb memory locations in any of the 2K x 9-bit, 1K x 18-bit, or 512 x 36-bit configurations and to 16 Kb memory locations in any of the 16K x 1-bit, 8K x 2-bit, or 4K x 4-bit configurations. The advantage of the 9-bit, 18-bit and 36-bit widths is the ability to store a parity bit for each eight bits. Parity bits must be generated or checked externally in user logic. In such cases, the width is viewed as 8 + 1, 16 + 2, or 32 + 4. These extra parity bits are stored and behave exactly as the other bits, including the timing parameters. Video applications can use the 9-bit ratio of Virtex-II Pro block SelectRAM+ memory to advantage.

Each block SelectRAM+ cell is a fully synchronous memory as illustrated in Figure 38. Input data bus and output data bus widths are identical.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 581/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 581 of 947

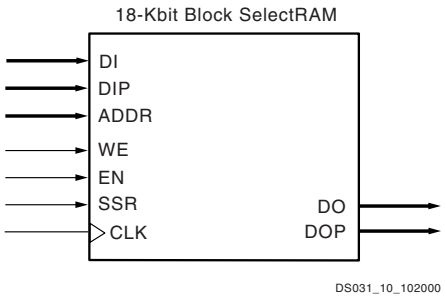


Figure 38: **18 Kb Block SelectRAM+ Memory in Single-Port Mode**

Dual-Port Configuration

As a dual-port RAM, each port of block SelectRAM+ has access to a common 18 Kb memory resource. These are fully synchronous ports with independent control signals for each port. The data widths of the two ports can be configured independently, providing built-in bus-width conversion.

Table 17 illustrates the different configurations available on ports A and B.

If both ports are configured in either 2K x 9-bit, 1K x 18-bit, or 512 x 36-bit configurations, the 18 Kb block is accessible from port A or B. If both ports are configured in either 16K x 1-bit, 8K x 2-bit. or 4K x 4-bit configurations, the 16 K-bit block is accessible from Port A or Port B. All other configurations result in one port having access to an 18 Kb memory block and the other port having access to a 16 K-bit subset of the memory block equal to 16 Kbs.

Table 17: **Dual-Port Mode Configurations**

Port A	16K x 1	16K x 1	16K x 1	16K x 1	16K x 1	16K x 1
Port B	16K x 1	8K x 2	4K x 4	2K x 9	1K x 18	512 x 36
Port A	8K x 2	8K x 2	8K x 2	8K x 2	8K x 2	
Port B	8K x 2	4K x 4	2K x 9	1K x 18	512 x 36	
Port A	4K x 4	4K x 4	4K x 4	4K x 4		
Port B	4K x 4	2K x 9	1K x 18	512 x 36		
Port A	2K x 9	2K x 9	2K x 9			
Port B	2K x 9	1K x 18	512 x 36			
Port A	1K x 18	1K x 18				
Port B	1K x 18	512 x 36				
Port A	512 x 36					
Port B	512 x 36					

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 582 of 947

Each block SelectRAM+ cell is a fully synchronous memory, as illustrated in Figure 39. The two ports have independent inputs and outputs and are independently clocked.

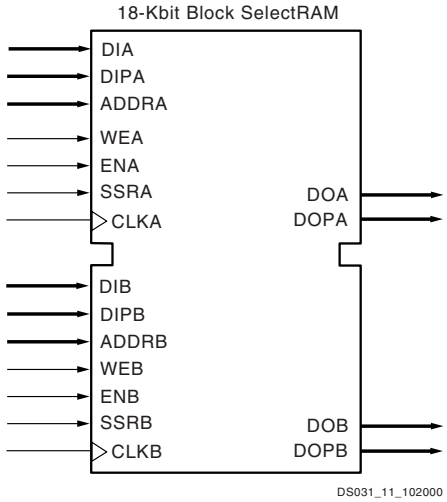


Figure 39: **18 Kb Block SelectRAM+ in Dual-Port Mode**

Port Aspect Ratios

Table 18 shows the depth and the width aspect ratios for the 18 Kb block SelectRAM+ resource. Virtex-II Pro block SelectRAM+ also includes dedicated routing resources to provide an efficient interface with CLBs, block SelectRAM+, and multipliers.

Table 18: **18 Kb Block SelectRAM+ Port Aspect Ratio**

Width	Depth	Address Bus	Data Bus	Parity Bus
1	16,384	ADDR[13:0]	DATA[0]	N/A
2	8,192	ADDR[12:0]	DATA[1:0]	N/A
4	4,096	ADDR[11:0]	DATA[3:0]	N/A
9	2,048	ADDR[10:0]	DATA[7:0]	Parity[0]
18	1,024	ADDR[9:0]	DATA[15:0]	Parity[1:0]
36	512	ADDR[8:0]	DATA[31:0]	Parity[3:0]

Read/Write Operations

The Virtex-II Pro block SelectRAM+ read operation is fully synchronous. An address is presented, and the read operation is enabled by control signal ENA or ENB. Then, depending on clock polarity, a rising or falling clock edge causes the stored data to be loaded into output registers.

The write operation is also fully synchronous. Data and address are presented, and the write operation is enabled by control signals WEA and WEB in addition to ENA or ENB. Then, again depending on the clock input mode, a rising or falling clock edge causes the data to be loaded into the memory cell addressed.

A write operation performs a simultaneous read operation. Three different options are available, selected by configuration:

1. **WRITE_FIRST**

   The WRITE_FIRST option is a transparent mode. The same clock edge that writes the data input (DI) into the memory also transfers DI into the output registers DO, as shown in Figure 40.

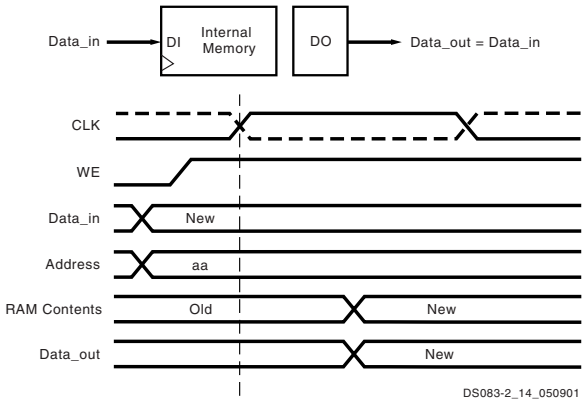


Figure 40: **WRITE_FIRST Mode**

2. **READ_FIRST**

The READ_FIRST option is a read-before-write mode.

The same clock edge that writes data input (DI) into the memory also transfers the prior content of the memory cell addressed into the data output registers DO, as shown in Figure 41.

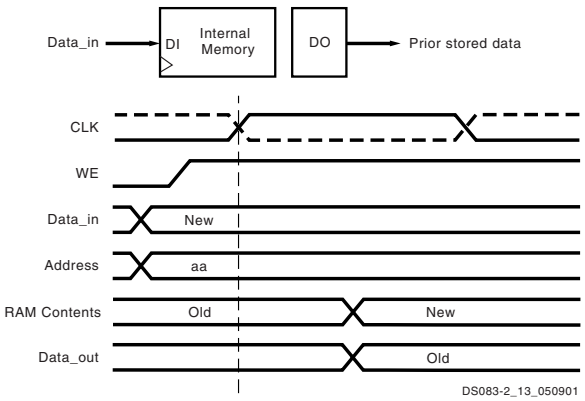


Figure 41: **READ_FIRST Mode**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 583/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 583 of 947

3. NO_CHANGE

The NO_CHANGE option maintains the content of the output registers, regardless of the write operation. The clock edge during the write mode has no effect on the content of the data output register DO. When the port is configured as NO_CHANGE, only a read operation loads a new value in the output register DO, as shown in Figure 42.

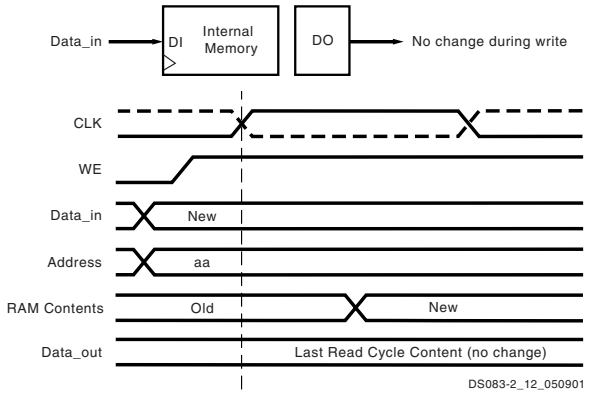


Figure 42: **NO_CHANGE Mode**

Control Pins and Attributes

Virtex-II Pro SelectRAM+ memory has two independent ports with the control signals described in Table 19. All control inputs including the clock have an optional inversion.

Table 19: **Control Functions**

Control Signal	Function
CLK	Read and Write Clock
EN	Enable affects Read, Write, Set, Reset
WE	Write Enable
SSR	Set DO register to SRVAL (attribute)

Initial memory content is determined by the INIT_xx attributes. Separate attributes determine the output register value after device configuration (INIT) and SSR is asserted (SRVAL). Both attributes (INIT_B and SRVAL) are available for each port when a block SelectRAM+ resource is configured as dual-port RAM.

Total Amount of SelectRAM+ Memory

Virtex-II Pro SelectRAM+ memory blocks are organized in multiple columns. The number of blocks per column depends on the row size, the number of Processor Blocks, and the number of RocketIO transceivers.

Table 20 shows the number of columns as well as the total amount of block SelectRAM+ memory available for each Virtex-II Pro device. The 18 Kb SelectRAM+ blocks are cascadable to implement deeper or wider single- or dual-port memory resources.

Table 20: **Virtex-II Pro SelectRAM+ Memory Available**

Device	Columns	Total SelectRAM+ Memory		
		Blocks	in Kb	in Bits
XC2VP2	4	12	216	221,184
XC2VP4	4	28	504	516,096
XC2VP7	6	44	792	811,008
XC2VP20	8	88	1,584	1,622,016
XC2VP30	8	136	2,448	2,506,752
XC2VP40	10	192	3,456	3,538,944
XC2VP50	12	232	4,176	4,276,224
XC2VP70	14	328	5,904	6,045,696
XC2VP100	16	444	7,992	8,183,808
XC2VP125	18	556	10,008	10,248,192

Figure 43 shows the layout of the block RAM columns in the XC2VP4 device.

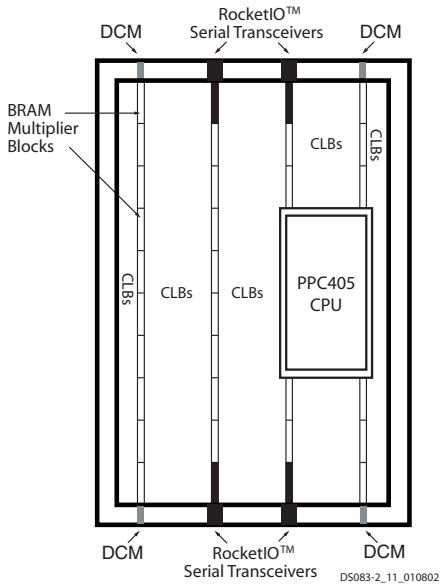


Figure 43: **XC2VP4 Block RAM Column Layout**

18-Bit x 18-Bit Multipliers

Introduction

A Virtex-II Pro multiplier block is an 18-bit by 18-bit 2's complement signed multiplier. Virtex-II Pro devices incorporate many embedded multiplier blocks. These multipliers can be associated with an 18 Kb block SelectRAM+ resource or can be used independently. They are optimized for high-speed operations and have a lower power consumption compared to an 18-bit x 18-bit multiplier in slices.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 584 of 947

Each SelectRAM+ memory and multiplier block is tied to four switch matrices, as shown in Figure 44.

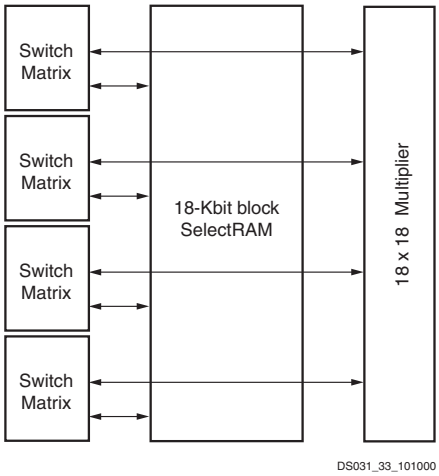


Figure 44: **SelectRAM+ and Multiplier Blocks**

Association With Block SelectRAM+ Memory

The interconnect is designed to allow SelectRAM+ memory and multiplier blocks to be used at the same time, but some interconnect is shared between the SelectRAM+ and the multiplier. Thus, SelectRAM+ memory can be used only up to 18 bits wide when the multiplier is used, because the multiplier shares inputs with the upper data bits of the SelectRAM+ memory.

This sharing of the interconnect is optimized for an 18-bit-wide block SelectRAM+ resource feeding the multiplier. The use of SelectRAM+ memory and the multiplier with an accumulator in LUTs allows for implementation of a digital signal processor (DSP) multiplier-accumulator (MAC) function, which is commonly used in finite and infinite impulse response (FIR and IIR) digital filters.

Configuration

The multiplier block is an 18-bit by 18-bit signed multiplier (2's complement). Both A and B are 18-bit-wide inputs, and the output is 36 bits. Figure 45 shows a multiplier block.

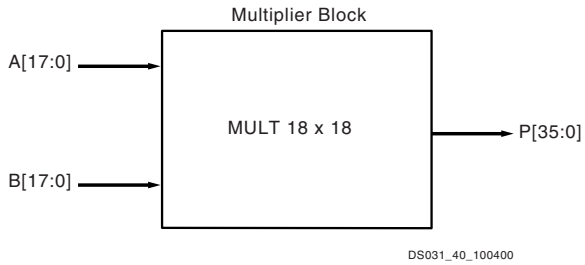


Figure 45: **Multiplier Block**

Locations / Organization

Multiplier organization is identical to the 18 Kb SelectRAM+ organization, because each multiplier is associated with an 18 Kb block SelectRAM+ resource.

Table 21: **Multiplier Resources**

Device	Columns	Total Multipliers
XC2VP2	4	12
XC2VP4	4	28
XC2VP7	6	44
XC2VP20	8	88
XC2VP30	8	136
XC2VP40	10	192
XC2VP50	12	232
XC2VP70	14	328
XC2VP100	16	444
XC2VP125	18	556

In addition to the built-in multiplier blocks, the CLB elements have dedicated logic to implement efficient multipliers in logic. (Refer to Configurable Logic Blocks (CLBs), page 24).

Global Clock Multiplexer Buffers

Virtex-II Pro devices have 16 clock input pins that can also be used as regular user I/Os. Eight clock pads center on both the top edge and the bottom edge of the device, as illustrated in Figure 46.

The global clock multiplexer buffer represents the input to dedicated low-skew clock tree distribution in Virtex-II Pro devices. Like the clock pads, eight global clock multiplexer buffers are on the top edge of the device and eight are on the bottom edge.

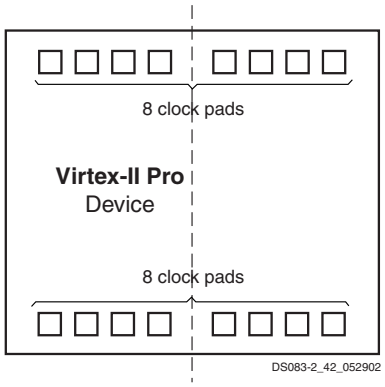


Figure 46: **Virtex-II Pro Clock Pads**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 585/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 585 of 947

Each global clock multiplexer buffer can be driven either by the clock pad to distribute a clock directly to the device, or by the Digital Clock Manager (DCM), discussed in Digital Clock Manager (DCM), page 40. Each global clock multiplexer buffer can also be driven by local interconnects. The DCM has clock output(s) that can be connected to global clock multiplexer buffer inputs, as shown in Figure 47.

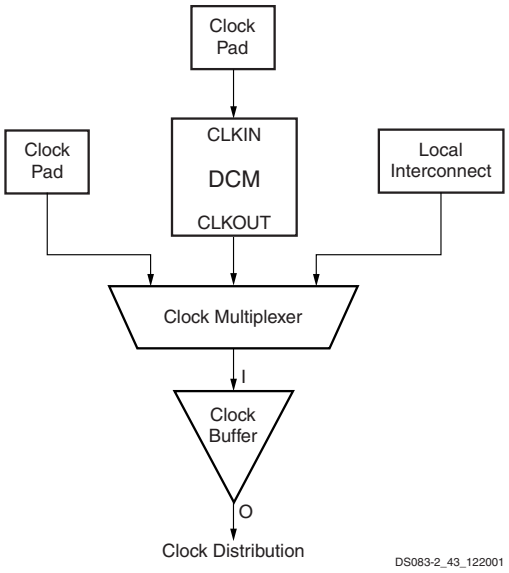


Figure 47: **Virtex-II Pro Clock Multiplexer Buffer Configuration**

Global clock buffers are used to distribute the clock to some or all synchronous logic elements (such as registers in CLBs and IOBs, and SelectRAM+ blocks.

Eight global clocks can be used in each quadrant of the Virtex-II Pro device. Designers should consider the clock distribution detail of the device prior to pin-locking and floorplanning. (See the *Virtex-II Pro Platform FPGA User Guide*.)

Figure 48 shows clock distribution in Virtex-II Pro devices.

In each quadrant, up to eight clocks are organized in clock rows. A clock row supports up to 16 CLB rows (eight up and eight down).

To reduce power consumption, any unused clock branches remain static.

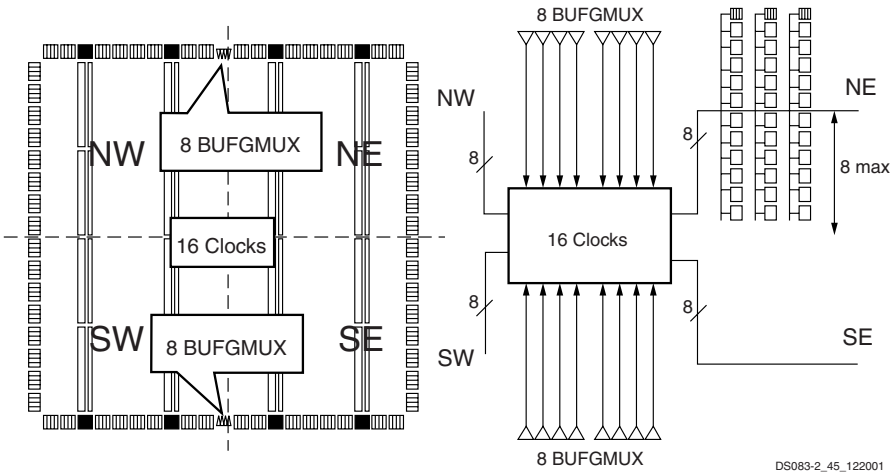


Figure 48: **Virtex-II Pro Clock Distribution**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 586 of 947

Global clocks are driven by dedicated clock buffers (BUFG), which can also be used to gate the clock (BUFGCE) or to multiplex between two independent clock inputs (BUFGMUX).

The most common configuration option of this element is as a buffer. A BUFG function in this (global buffer) mode, is shown in Figure 49.




Figure 49: **Virtex-II Pro BUFG Function**

The Virtex-II Pro global clock buffer BUFG can also be configured as a clock enable/disable circuit (Figure 50), as well as a two-input clock multiplexer (Figure 51). A functional description of these two options is provided below. Each of them can be used in either of two modes, selected by configuration: rising clock edge or falling clock edge.

This section describes the rising clock edge option. For the opposite option, falling clock edge, just change all "rising" references to "falling" and all "High" references to "Low", except for the description of the CE and S levels. The rising clock edge option uses the BUFGCE and BUFGMUX primitives. The falling clock edge option uses the BUFGCE_1 and BUFGMUX_1 primitives.

BUFGCE

If the CE input is active (High) prior to the incoming rising clock edge, this Low-to-High-to-Low clock pulse passes through the clock buffer. Any level change of CE during the incoming clock High time has no effect.




Figure 50: **Virtex-II Pro BUFGCE Function**

If the CE input is inactive (Low) prior to the incoming rising clock edge, the following clock pulse does not pass through the clock buffer, and the output stays Low. Any level change of CE during the incoming clock High time has no effect. CE must not change during a short setup window just prior to the rising clock edge on the BUFGCE input I. Violating this setup time requirement can result in an undefined runt pulse output.

BUFGMUX

BUFGMUX can switch between two unrelated, even asynchronous clocks. Basically, a Low on S selects the I_0 input, a High on S selects the I_1 input. Switching from one clock to the other is done in such a way that the output High and Low time is never shorter than the shortest High or Low time of either input clock. As long as the presently selected clock is High, any level change of S has no effect.




Figure 51: **Virtex-II Pro BUFGMUX Function**

If the presently selected clock is Low while S changes, or if it goes Low after S has changed, the output is kept Low until the other ("to-be-selected") clock has made a transition from High to Low. At that instant, the new clock starts driving the output.

The two clock inputs can be asynchronous with regard to each other, and the S input can change at any time, except for a short setup time prior to the rising edge of the presently selected clock; that is, prior to the rising edge of the BUFGMUX output O. Violating this setup time requirement can result in an undefined runt pulse output.

All Virtex-II Pro devices have 16 global clock multiplexer buffers.

Figure 52 shows a switchover from CLK0 to CLK1.

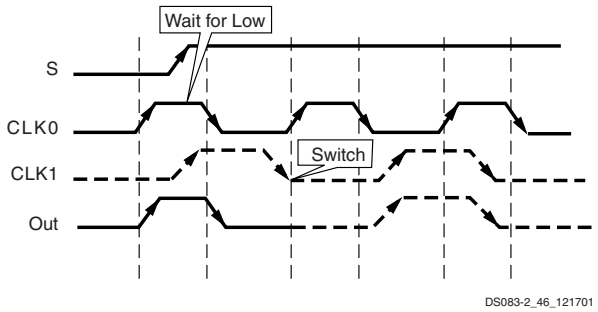


Figure 52: **Clock Multiplexer Waveform Diagram**

- The current clock is CLK0.
- S is activated High.
- If CLK0 is currently High, the multiplexer waits for CLK0 to go Low.
- Once CLK0 is Low, the multiplexer output stays Low until CLK1 transitions High to Low.
- When CLK1 transitions from High to Low, the output switches to CLK1.
- No glitches or short pulses can appear on the output.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 587/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 587 of 947

Digital Clock Manager (DCM)

The Virtex-II Pro DCM offers a wide range of powerful clock management features.

- **Clock De-skew**: The DCM generates new system clocks (either internally or externally to the FPGA), which are phase-aligned to the input clock, thus eliminating clock distribution delays.
- **Frequency Synthesis**: The DCM generates a wide range of output clock frequencies, performing very flexible clock multiplication and division.
- **Phase Shifting**: The DCM provides both coarse phase shifting and fine-grained phase shifting with dynamic phase shift control.

The DCM utilizes fully digital delay lines allowing robust high-precision control of clock phase and frequency. It also utilizes fully digital feedback systems, operating dynamically to compensate for temperature and voltage variations during operation.

Up to four of the nine DCM clock outputs can drive inputs to global clock buffers or global clock multiplexer buffers simultaneously (see Figure 53). All DCM clock outputs can simultaneously drive general routing resources, including routes to output buffers.

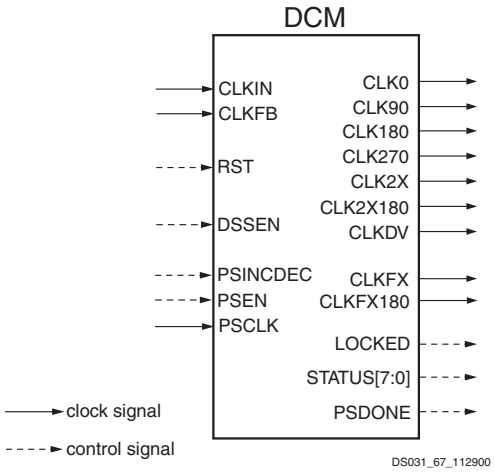


Figure 53: **Digital Clock Manager**

The DCM can be configured to delay the completion of the Virtex-II Pro configuration process until after the DCM has achieved lock. This guarantees that the chip does not begin operating until after the system clocks generated by the DCM have stabilized.

The DCM has the following general control signals:

- RST input pin: resets the entire DCM
- LOCKED output pin: asserted High when all enabled DCM circuits have locked.
- STATUS output pins (active High): shown in Table 22.

Table 22: **DCM Status Pins**

Status Pin	Function
0	Phase Shift Overflow
1	CLKIN Stopped
2	CLKFX Stopped
3	N/A
4	N/A
5	N/A
6	N/A
7	N/A

Clock De-skew

The DCM de-skews the output clocks relative to the input clock by automatically adjusting a digital delay line. Additional delay is introduced so that clock edges arrive at internal registers and block RAMs simultaneously with the clock edges arriving at the input clock pad. Alternatively, external clocks, which are also de-skewed relative to the input clock, can be generated for board-level routing. All DCM output clocks are phase-aligned to CLK0 and, therefore, are also phase-aligned to the input clock.

To achieve clock de-skew, the CLKFB input must be connected, and its source must be either CLK0 or CLK2X. Note that CLKFB must always be connected, unless only the CLKFX or CLKFX180 outputs are used and de-skew is not required.

Frequency Synthesis

The DCM provides flexible methods for generating new clock frequencies. Each method has a different operating frequency range and different AC characteristics. The CLK2X and CLK2X180 outputs double the clock frequency. The CLKDV output creates divided output clocks with division options of 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 9, 10, 11, 12, 13, 14, 15, and 16.

The CLKFX and CLKFX180 outputs can be used to produce clocks at the following frequency:

$$FREQ_{CLKFX} = (M/D) \bullet FREQ_{CLKIN}$$

where M and D are two integers. Specifications for M and D are provided under **DCM Timing Parameters** in Data Sheet Module 3. By default, $M = 4$ and $D = 1$, which results in a clock output frequency four times faster than the clock input frequency (CLKIN).

CLK2X180 is phase shifted 180 degrees relative to CLK2X. CLKFX180 is phase shifted 180 degrees relative to CLKFX. All frequency synthesis outputs automatically have 50/50 duty cycles, with the exception of the CLKDV output when performing a non-integer divide in high-frequency mode. See Table 23 for more details.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 588 of 947

Note that CLK2X and CLK2X180 are not available in high-frequency mode.

Table 23: **CLKDV Duty Cycle for Non-integer Divides**

CLKDV_DIVIDE	Duty Cycle
1.5	1/3
2.5	2/5
3.5	3/7
4.5	4/9
5.5	5/11
6.5	6/13
7.5	7/15

Phase Shifting

The DCM provides additional control over clock skew through either coarse or fine-grained phase shifting. The CLK0, CLK90, CLK180, and CLK270 outputs are each phase shifted by ¼ of the input clock period relative to each other, providing coarse phase control. Note that CLK90 and CLK270 are not available in high-frequency mode.

Fine-phase adjustment affects all nine DCM output clocks. When activated, the phase shift between the rising edges of CLKIN and CLKFB is a specified fraction of the input clock period.

In variable mode, the PHASE_SHIFT value can also be dynamically incremented or decremented as determined by PSINCDEC synchronously to PSCLK, when the PSEN input is active. Figure 54 illustrates the effects of fine-phase shifting. For more information on DCM features, see the *Virtex-II Pro Platform FPGA User Guide*.

Table 24 lists fine-phase shifting control pins, when used in variable mode.

Table 24: **Fine Phase Shifting Control Pins**

Control Pin	Direction	Function
PSINCDEC	In	Increment or decrement
PSEN	In	Enable ± phase shift
PSCLK	In	Clock for phase shift
PSDONE	Out	Active when completed

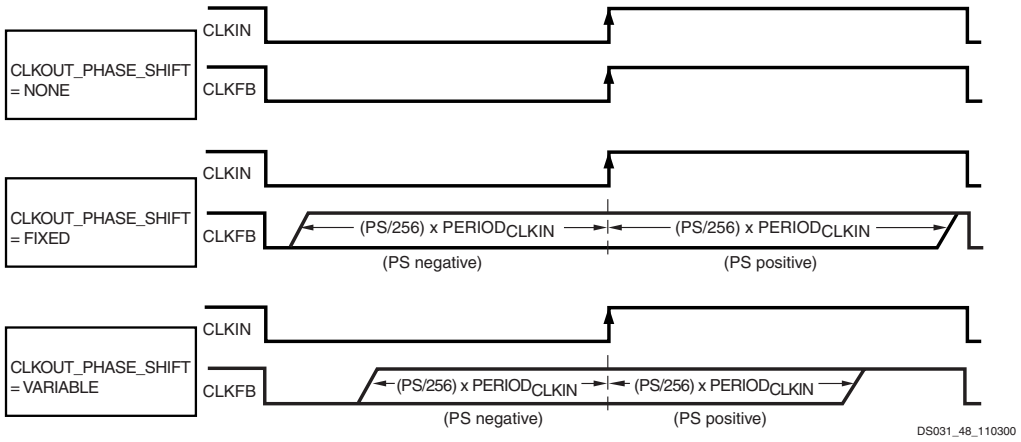


Figure 54: **Fine-Phase Shifting Effects**

Two separate components of the phase shift range must be understood:

- PHASE_SHIFT attribute range
- FINE_SHIFT_RANGE DCM timing parameter range

The PHASE_SHIFT attribute is the numerator in the following equation:

$$\text{Phase Shift (ns)} = (\text{PHASE\_SHIFT}/256) * \text{PERIOD}_{\text{CLKIN}}$$

The full range of this attribute is always -255 to +255, but its practical range varies with CLKIN frequency, as constrained by the FINE_SHIFT_RANGE component, which represents the total delay achievable by the phase shift delay line. Total delay is a function of the number of delay taps used in the circuit. Across process, voltage, and temperature, this absolute range is guaranteed to be as specified under **DCM Timing Parameters** in **Data Sheet Module 3**.

Absolute range (fixed mode) = ± FINE_SHIFT_RANGE

Absolute range (variable mode) = ± FINE_SHIFT_RANGE/2

The reason for the difference between fixed and variable modes is as follows. For variable mode to allow symmetric, dynamic sweeps from -255/256 to +255/256, the DCM sets the "zero phase skew" point as the middle of the delay line, thus dividing the total delay line range in half. In fixed mode, since the PHASE_SHIFT value never changes after configu-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 589/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 589 of 947

ration, the entire delay line is available for insertion into either the CLKIN or CLKFB path (to create either positive or negative skew).

Taking both of these components into consideration, the following are some usage examples:

- If $PERIOD_{CLKIN}$ = 2 * FINE_SHIFT_RANGE, then PHASE_SHIFT in fixed mode is limited to ± 128, and in variable mode it is limited to ± 64.
- If $PERIOD_{CLKIN}$ = FINE_SHIFT_RANGE, then PHASE_SHIFT in fixed mode is limited to ± 255, and in variable mode it is limited to ± 128.
- If $PERIOD_{CLKIN} \leq 0.5$ * FINE_SHIFT_RANGE, then PHASE_SHIFT is limited to ± 255 in either mode.

Operating Modes

The frequency ranges of DCM input and output clocks depend on the operating mode specified, either low-frequency mode or high-frequency mode, according to Table 25. For actual values, see **Virtex-II Pro Switching Characteristics (Module 3)**. The CLK2X, CLK2X180, CLK90, and CLK270 outputs are not available in high-frequency mode.

High or low-frequency mode is selected by an attribute.

Table 25: **DCM Frequency Ranges**

Output Clock	Low-Frequency Mode		High-Frequency Mode	
	CLKIN Input	CLK Output	CLKIN Input	CLK Output
CLK0, CLK180	CLKIN_FREQ_DLL_LF	CLKOUT_FREQ_1X_LF	CLKIN_FREQ_DLL_HF	CLKOUT_FREQ_1X_HF
CLK90, CLK270	CLKIN_FREQ_DLL_LF	CLKOUT_FREQ_1X_LF	NA	NA
CLK2X, CLK2X180	CLKIN_FREQ_DLL_LF	CLKOUT_FREQ_2X_LF	NA	NA
CLKDV	CLKIN_FREQ_DLL_LF	CLKOUT_FREQ_DV_LF	CLKIN_FREQ_DLL_HF	CLKOUT_FREQ_DV_HF
CLKFX, CLKFX180	CLKIN_FREQ_FX_LF	CLKOUT_FREQ_FX_LF	CLKIN_FREQ_FX_HF	CLKOUT_FREQ_FX_HF

Routing

DCM and MGT Locations/Organization

Virtex-II Pro DCMs and serial transceivers (MGTs) are placed on the top and bottom of each block RAM and multiplier column in some combination, as shown in Table 26. The number of DCMs and RocketIO transceivers total twice the number of block RAM columns in the device. Refer to Figure 43, page 36 for an illustration of this in the XC2VP4 device.

Place-and-route software takes advantage of this regular array to deliver optimum system performance and fast compile times. The segmented routing resources are essential to guarantee IP cores portability and to efficiently handle an incremental design flow that is based on modular implementations. Total design time is reduced due to fewer and shorter design iterations.

Table 26: **DCM Organization**

Device	Block RAM Columns	DCMs	MGTs
XC2VP2	4	4	4
XC2VP4	4	4	4
XC2VP7	6	4	8
XC2VP20	8	8	8
XC2VP30	8	8	8
XC2VP40	10	8	12
XC2VP50	12	8	16
XC2VP70	14	8	20
XC2VP100	16	12	20
XC2VP125	18	12	24

Hierarchical Routing Resources

Most Virtex-II Pro signals are routed using the global routing resources, which are located in horizontal and vertical routing channels between each switch matrix.

As shown in Figure 55, page 43, Virtex-II Pro has fully buffered programmable interconnections, with a number of resources counted between any two adjacent switch matrix rows or columns. Fanout has minimal impact on the performance of each net.

- The long lines are bidirectional wires that distribute signals across the device. Vertical and horizontal long lines span the full height and width of the device.
- The hex lines route signals to every third or sixth block away in all four directions. Organized in a staggered pattern, hex lines can only be driven from one end. Hex-line signals can be accessed either at the endpoints or at the midpoint (three blocks from the source).

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 590 of 947

- The double lines route signals to every first or second block away in all four directions. Organized in a staggered pattern, double lines can be driven only at their endpoints. Double-line signals can be accessed either at the endpoints or at the midpoint (one block from the source).
- The direct connect lines route signals to neighboring blocks: vertically, horizontally, and diagonally.
- The fast connect lines are the internal CLB local interconnections from LUT outputs to LUT inputs.

Dedicated Routing

In addition to the global and local routing resources, dedicated signals are available.

- There are eight global clock nets per quadrant. (See Global Clock Multiplexer Buffers, page 37.)
- Horizontal routing resources are provided for on-chip 3-state buses. Four partitionable bus lines are provided per CLB row, permitting multiple buses within a row. (See 3-State Buffers, page 32.)
- Two dedicated carry-chain resources per slice column (two per CLB column) propagate carry-chain MUXCY output signals vertically to the adjacent slice. (See CLB/Slice Configurations, page 32.)
- One dedicated SOP chain per slice row (two per CLB row) propagate ORCY output logic signals horizontally to the adjacent slice. (See Sum of Products, page 31.)
- One dedicated shift-chain per CLB connects the output of LUTs in shift-register mode to the input of the next LUT in shift-register mode (vertically) inside the CLB. (See Shift Registers, page 28.)

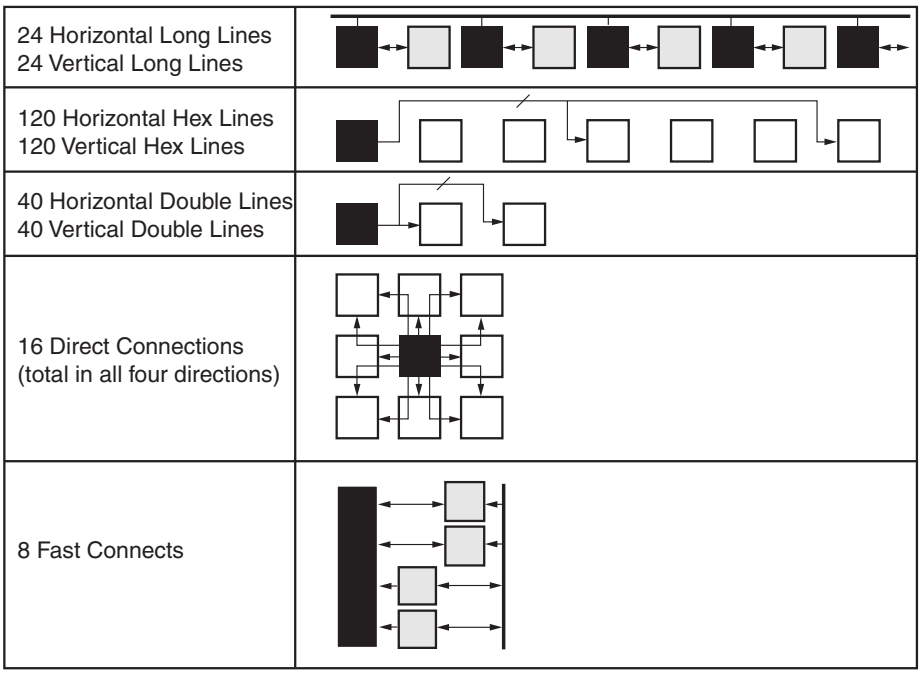


Figure 55: **Hierarchical Routing Resources**

Configuration

Virtex-II Pro devices are configured by loading application specific configuration data into the internal configuration memory. Configuration is carried out using a subset of the device pins, some of which are dedicated, while others can be re-used as general purpose inputs and outputs once configuration is complete.

Depending on the system design, several configuration modes are supported, selectable via mode pins. The mode pins M2, M1 and M0 are dedicated pins. An additional pin, HSWAP_EN is used in conjunction with the mode pins to select whether user I/O pins have pull-ups during configuration. By default, HSWAP_EN is tied High (internal pull-up) which shuts off the pull-ups on the user I/O pins during configuration. When HSWAP_EN is tied Low, user I/Os have pull-ups during configuration. Other dedicated pins are CCLK (the configuration clock pin), DONE, PROG_B, and the boundary-scan pins: TDI, TDO, TMS, and TCK. (The TDO pin is open-drain and does not have an internal pullup resistor.) Depending on the configuration mode chosen, CCLK can be an output generated by the FPGA, or an input

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 591/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 591 of 947

accepting an externally generated clock. The configuration pins and boundary scan pins are independent of the V_{CCO}. The auxiliary power supply (V_{CCAUX}) of 2.5V is used for these pins. All configuration pins are LVCMOS25 12mA. See **Virtex-II Pro Switching Characteristics (Module 3)**.

Configuration Modes

A "persist" option is available which can be used to force the configuration pins to retain their configuration function even after device configuration is complete. If the persist option is not selected then the configuration pins with the exception of CCLK, PROG_B, and DONE can be used as user I/O in normal operation. The persist option does not apply to the boundary-scan related pins. The persist feature is valuable in applications which employ partial reconfiguration or reconfiguration on the fly.

Virtex-II Pro supports the following five configuration modes:

- Slave-Serial Mode
- Master-Serial Mode
- Slave SelectMAP Mode
- Master SelectMAP Mode
- Boundary-Scan (JTAG, IEEE 1532) Mode

Refer to Table 27, page 45.

A detailed description of configuration modes is provided in the *Virtex-II Pro Platform FPGA User Guide.*

Slave-Serial Mode

In slave-serial mode, the FPGA receives configuration data in bit-serial form from a serial PROM or other serial source of configuration data. The CCLK pin on the FPGA is an input in this mode. The serial bitstream must be setup at the DIN input pin a short time before each rising edge of the externally generated CCLK.

Multiple FPGAs can be daisy-chained for configuration from a single source. After a particular FPGA has been configured, the data for the next device is routed internally to the DOUT pin. The data on the DOUT pin changes on the rising edge of CCLK.

Slave-serial mode is selected by applying [111] to the mode pins (M2, M1, M0). A weak pull-up on the mode pins makes slave serial the default mode if the pins are left unconnected.

Master-Serial Mode

In master-serial mode, the CCLK pin is an output pin. It is the Virtex-II Pro FPGA device that drives the configuration clock on the CCLK pin to a Xilinx Serial PROM which in turn feeds bit-serial data to the DIN input. The FPGA accepts this data on each rising CCLK edge. After the FPGA has been loaded, the data for the next device in a daisy-chain is presented on the DOUT pin after the rising CCLK edge.

The interface is identical to slave serial except that an internal oscillator is used to generate the configuration clock (CCLK). A wide range of frequencies can be selected for CCLK which always starts at a slow default frequency. Configuration bits then switch CCLK to a higher frequency for the remainder of the configuration.

Slave SelectMAP Mode

The SelectMAP mode is the fastest configuration option. Byte-wide data is written into the Virtex-II Pro FPGA device with a BUSY flag controlling the flow of data. An external data source provides a byte stream, CCLK, an active Low Chip Select (CS_B) signal and a Write signal (RDWR_B). If BUSY is asserted (High) by the FPGA, the data must be held until BUSY goes Low. Data can also be read using the SelectMAP mode. If RDWR_B is asserted, configuration data is read out of the FPGA as part of a readback operation.

After configuration, the pins of the SelectMAP port can be used as additional user I/O. Alternatively, the port can be retained to permit high-speed 8-bit readback using the persist option.

Multiple Virtex-II Pro FPGAs can be configured using the SelectMAP mode, and be made to start-up simultaneously. To configure multiple devices in this way, wire the individual CCLK, Data, RDWR_B, and BUSY pins of all the devices in parallel. The individual devices are loaded separately by deasserting the CS_B pin of each device in turn and writing the appropriate data.

Master SelectMAP Mode

This mode is a master version of the SelectMAP mode. The device is configured byte-wide on a CCLK supplied by the Virtex-II Pro FPGA device. Timing is similar to the Slave SerialMAP mode except that CCLK is supplied by the Virtex-II Pro FPGA.

Boundary-Scan (JTAG, IEEE 1532) Mode

In boundary-scan mode, dedicated pins are used for configuring the Virtex-II Pro device. The configuration is done entirely through the IEEE 1149.1 Test Access Port (TAP). Virtex-II Pro device configuration using Boundary scan is compliant with IEEE 1149.1-1993 standard and the new IEEE 1532 standard for In-System Configurable (ISC) devices. The IEEE 1532 standard is backward compliant with the IEEE 1149.1-1993 TAP and state machine. The IEEE Standard 1532 for In-System Configurable (ISC) devices is intended to be programmed, reprogrammed, or tested on the board via a physical and logical protocol. Configuration through the boundary-scan port is always available, independent of the mode selection. Selecting the boundary-scan mode simply turns off the other modes.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 592 of 947

Table 27: **Virtex-II Pro Configuration Mode Pin Settings**

Configuration Mode(1)	M2	M1	M0	CCLK Direction	Data Width	Serial D_{OUT} (2)
Master Serial	0	0	0	Out	1	Yes
Slave Serial	1	1	1	In	1	Yes
Master SelectMAP	0	1	1	Out	8	No
Slave SelectMAP	1	1	0	In	8	No
Boundary Scan	1	0	1	N/A	1	No

Notes:
1. The HSWAP_EN pin controls the pullups. Setting M2, M1, and M0 selects the configuration mode, while the HSWAP_EN pin controls whether or not the pullups are used.
2. Daisy chaining is possible only in modes where Serial D_{OUT} is used. For example, in SelectMAP modes, the first device does NOT support daisy chaining of downstream devices.

Table 28 lists the total number of bits required to configure each device.

Table 28: **Virtex-II Pro Bitstream Lengths**

Device	Number of Configuration Bits
XC2VP2	1,305,440
XC2VP4	3,006,560
XC2VP7	4,485,472
XC2VP20	8,214,624
XC2VP30	11,589,984
XC2VP40	15,868,256
XC2VP50	19,021,408
XC2VP70	26,099,040
XC2VP100	34,292,832
XC2VP125	43,602,784

Configuration Sequence

The configuration of Virtex-II Pro devices is a three-phase process. First, the configuration memory is cleared. Next, configuration data is loaded into the memory, and finally, the logic is activated by a start-up process.

Configuration is automatically initiated on power-up unless it is delayed by the user. The INIT_B pin can be held Low using an open-drain driver. An open-drain is required since INIT_B is a bidirectional open-drain pin that is held Low by a Virtex-II Pro FPGA device while the configuration memory is being cleared. Extending the time that the pin is Low causes the configuration sequencer to wait. Thus, configuration is delayed by preventing entry into the phase where data is loaded.

The configuration process can also be initiated by asserting the PROG_B pin. The end of the memory-clearing phase is signaled by the INIT_B pin going High, and the completion of the entire process is signaled by the DONE pin going High. The Global Set/Reset (GSR) signal is pulsed after the last frame of configuration data is written but before the start-up sequence. The GSR signal resets all flip-flops on the device.

The default start-up sequence is that one CCLK cycle after DONE goes High, the global 3-state signal (GTS) is released. This permits device outputs to turn on as necessary. One CCLK cycle later, the Global Write Enable (GWE) signal is released. This permits the internal storage elements to begin changing state in response to the logic and the user clock.

The relative timing of these events can be changed via configuration options in software. In addition, the GTS and GWE events can be made dependent on the DONE pins of multiple devices all going High, forcing the devices to start synchronously. The sequence can also be paused at any stage, until lock has been achieved on any or all DCMs, as well as DCI.

Readback

In this mode, configuration data from the Virtex-II Pro FPGA device can be read back. Readback is supported only in the SelectMAP (master and slave) and Boundary Scan mode.

Along with the configuration data, it is possible to read back the contents of all registers, distributed SelectRAM+, and block RAM resources. This capability is used for real-time debugging. For more detailed configuration information, see the *Virtex-II Pro Platform FPGA User Guide.*

Bitstream Encryption

Virtex-II Pro devices have an on-chip decryptor using one or two sets of three keys for triple-key Data Encryption Standard (DES) operation. Xilinx software tools offer an optional encryption of the configuration data (bitstream) with a triple-key DES determined by the designer.

The keys are stored in the FPGA by JTAG instruction and retained by a battery connected to the V_{BATT} pin, when the device is not powered. Virtex-II Pro devices can be config-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 593/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 593 of 947

ured with the corresponding encrypted bitstream, using any of the configuration modes described previously.

A detailed description of how to use bitstream encryption is provided in the *Virtex-II Pro Platform FPGA User Guide*. Your local FAE can also provide specific information on this feature.

Partial Reconfiguration

Partial reconfiguration of Virtex-II Pro devices can be accomplished in either Slave SelectMAP mode or Boundary-Scan mode. Instead of resetting the chip and doing a full configuration, new data is loaded into a specified area of the chip, while the rest of the chip remains in operation. Data is loaded on a column basis, with the smallest load unit being a configuration "frame" of the bitstream (device size dependent).

Partial reconfiguration is useful for applications that require different designs to be loaded into the same area of a chip, or that require the ability to change portions of a design without having to reset or reconfigure the entire chip.

For more information on Partial Reconfiguration in Virtex-II Pro devices, please refer to Xilinx Application Note **XAPP290**, *Two Flows for Partial Reconfiguration*.

Revision History

This section records the change history for this module of the data sheet.

Date	Version	Revision
01/31/02	1.0	Initial Xilinx release.
06/13/02	2.0	New Virtex-II Pro family members. New timing parameters per speedsfile **v1.62**.
09/03/02	2.1	• Revised Reset and Power sections. • Updated Table 8, which lists compatible input standards. [Table deleted in v2.6.] • Added Figure 19, Figure 20, and Figure 21, which provide examples illustrating the use of I/O standards.
09/27/02	2.2	• In section Overview, corrected max number of MGTs from 16 to 24. • In section Input/Output Blocks (IOBs), added references to XAPP653 regarding implementation of 3.3V I/O standards.
11/20/02	2.3	• Table 3: Added rows for LVTTL, LVCMOS33, and PCI-X. • Table 8: Added LVTTL and LVCMOS33 to compatible 3.3V cells. [Table deleted in v2.6.] • Table 28: Correct bitstream lengths.
12/03/02	2.4	• Added mention of LVTTL and PCI with respect to SelectIO-Ultra configurations. See section Input/Output Individual Options and Figure 13.
01/20/03	2.5	• Added qualification to features vs. Virtex-II (open-drain output pin TDO does not have internal pullup resistor) • Table 7: Added HSTL18 (I, II, III, & IV) and HSTL18_DCI (I,II, III & IV) to 1.8V VCCO row. [Table deleted in v2.6.] • Table 8: Numerous revisions. [Table deleted in v2.6.]
03/24/03	2.5.1	• Table 5: Corrected I/O standard names SSTL18_I and SSTL18_II to SSTL18_I_DCI and SSTL18_II_DCI respectively. • Figure 52, text below: Corrected wording of criteria for clock switching.
05/27/03	2.6	• Removed Compatible Output Standards and Compatible Input Standards tables. • Added new Table 7, Summary of Voltage Supply Requirements for All Input and Output Standards. This table replaces deleted I/O standards tables. • Corrected sentence in section Input/Output Individual Options, page 16, to read "The optional weak-keeper circuit is connected to each *user I/O pad*." • Added section Rules for Combining I/O Standards in the Same Bank, page 18.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 594 of 947

Date	Version	Revision
06/02/03	2.7	• Added four Differential Termination I/O standards to Table 4 and Table 7. • Added section On-Chip Differential Termination and Figure 22, page 23.

Virtex-II Pro Data Sheet

The Virtex-II Pro Data Sheet contains the following modules:

- Virtex-II Pro™ Platform FPGAs: Introduction and Overview (Module 1)
- Virtex-II Pro™ Platform FPGAs: Functional Description (Module 2)
- Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)
- Virtex-II Pro™ Platform FPGAs: Pinout Information (Module 4)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 595 of 947

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 596 of 947

Virtex-II Pro Electrical Characteristics

Virtex-II Pro devices are provided in -7, -6, and -5 speed grades, with -7 having the highest performance.

Virtex-II Pro DC and AC characteristics are specified for both commercial and industrial grades. Except the operating temperature range or unless otherwise noted, all the DC and AC electrical parameters are the same for a particular speed grade (that is, the timing characteristics of a -6 speed grade industrial device are the same as for a -6 speed grade commercial device). However, only selected speed grades and/or devices might be available in the industrial range.

All supply voltage and junction temperature specifications are representative of worst-case conditions. The parameters included are common to popular designs and typical applications. Contact Xilinx for design considerations requiring more detailed information.

All specifications are subject to change without notice.

Virtex-II Pro DC Characteristics

Table 1: **Absolute Maximum Ratings**

Symbol	Description		Units
V_{CCINT}	Internal supply voltage relative to GND	–0.5 to 1.6	V
V_{CCAUX}	Auxiliary supply voltage relative to GND	–0.5 to 3.0	V
V_{CCO}	Output drivers supply voltage relative to GND	–0.5 to 3.75	V
V_{BATT}	Key memory battery backup supply	–0.5 to 3.0	V
V_{REF}	Input reference voltage	–0.3 to 3.75	V
V_{IN}	3.3V I/O input voltage relative to GND (user and dedicated I/Os)	–0.3 to 3.75	V
	2.5V or below I/O input voltage relative to GND (user and dedicated I/Os)	–0.5 to V_{CCO} + 0.5	V
V_{TS}	Voltage applied to 3-state 3.3V output (user and dedicated I/Os)	–0.3 to 3.75	V
	Voltage applied to 3-state 2.5V or below output (user and dedicated I/Os)	–0.5 to V_{CCO} + 0.5	V
$V_{CCAUXRX}$	Auxilliary supply voltage relative to analog ground, GNDA (RocketIO pins)	–0.5 to 3.0	V
$V_{CCAUXTX}$	Auxilliary supply voltage relative to analog ground, GNDA (RocketIO pins)	–0.5 to 3.0	V
V_{TTX}	Terminal transmit supply voltage relative to GND (RocketIO pins)	–0.5 to 3.0	V
V_{TRX}	Terminal receive supply voltage relative to GND (RocketIO pins)	–0.5 to 3.0	V
T_{STG}	Storage temperature (ambient)	–65 to +150	°C
T_{SOL}	Maximum soldering temperature	+220	°C
T_J	Operating junction temperature	+125(2)	°C

Notes:

1. Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.
2. For 3.3V operation, T_J must be less than 100°C.

© 2003 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 597 of 947

Table 2: **Recommended Operating Conditions**

Symbol	Description		Min	Max	Units
V_{CCINT}	Internal supply voltage relative to GND, T_J = 0 °C to +85°C	Commercial	1.425	1.575	V
	Internal supply voltage relative to GND, T_J = –40°C to +100°C	Industrial	1.425	1.575	V
V_{CCAUX}(1)	Auxiliary supply voltage relative to GND, T_J = 0 °C to +85°C	Commercial	2.375	2.625	V
	Auxiliary supply voltage relative to GND, T_J = –40°C to +100°C	Industrial	2.375	2.625	V
V_{CCO}(2)	Supply voltage relative to GND, T_J = 0 °C to +85°C	Commercial	1.2	3.45(4)	V
	Supply voltage relative to GND, T_J = –40°C to +100°C	Industrial	1.2	3.45(4)	V
V_{IN}	3.3V supply voltage relative to GND, T_J = 0 °C to +85°C	Commercial	GND – 0.2	3.45(4)	V
	3.3V supply voltage relative to GND, T_J = –40°C to +100°C	Industrial	GND – 0.2	3.45(4)	V
	2.5V and below supply voltage relative to GND, T_J = 0 °C to +85°C	Commercial	GND – 0.2	V_{CCO} + 0.2	V
	2.5V and below supply voltage relative to GND, T_J = –40°C to +100°C	Industrial	GND – 0.2	V_{CCO} + 0.2	V
V_{BATT}(3)	Battery voltage relative to GND, T_J = 0 °C to +85°C	Commercial	1.0	2.63	V
	Battery voltage relative to GND, T_J = –40°C to +100°C	Industrial	1.0	2.63	V
$V_{CCAUXRX}$,(5) $V_{CCAUXTX}$(5)	Auxilliary supply voltage relative to GNDA	Commercial	2.375	2.625	V
	Auxilliary supply voltage relative to GNDA	Industrial	2.375	2.625	V
V_{TTX}, V_{TRX}	Terminal supply voltage relative to GND	Commercial	1.8	2.625	V
	Terminal supply voltage relative to GND	Industrial	1.8	2.625	V

Notes:
1. Recommended maximum voltage droop for V_{CCAUX} is 10 mV/ms.
2. Configuration data is retained even if V_{CCO} drops to 0V.
3. If battery is not used, do not connect V_{BATT}.
4. For PCI and PCI-X, refer to **XAPP653**, available on the Xilinx website at **www.xilinx.com**.
5. **IMPORTANT!** All unused RocketIO transceivers in the FPGA must be connected to power and ground. If RocketIO transceivers in the FPGA are used, refer to the information on power filtering in the ***RocketIO Transceiver User Guide***. Unused transceivers can be powered by any 2.5V source, and passive filtering is not required.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 598 of 947

Table 3: **DC Characteristics Over Recommended Operating Conditions**

Symbol	Description	Min	Typ	Max	Units
V_{DRINT}	Data retention V_{CCINT} voltage (below which configuration data might be lost)	1.25			V
V_{DRI}	Data retention V_{CCAUX} voltage (below which configuration data might be lost)	2.0			V
I_{REF}	V_{REF} current per pin			10	µA
I_L	Input or output leakage current per pin (sample-tested)			10	µA
C_{IN}	Input capacitance (sample-tested)			10	pF
I_{RPU}	Pad pull-up (when selected) @ V_{in} = 0V, V_{CCO} = 2.5V (sample tested)			150	µA
I_{RPD}	Pad pull-down (when selected) @ V_{in} = 2.5V (sample-tested)			150	µA
I_{BATT}	Battery supply current		100		nA
$I_{CCAUXTX}$	Operating $V_{CCAUXTX}$ supply current		60		mA
$I_{CCAUXRX}$	Operating $V_{CCAUXRX}$ supply current		35		mA
I_{TTX}	Operating I_{TTX} supply current when transmitter is AC coupled		30		mA
	Operating I_{TTX} supply current when transmitter is DC coupled		15		mA
I_{TRX}	Operating I_{TRX} supply current when receiver is AC coupled				mA
	Operating I_{TRX} supply current when receiver is DC coupled		15		mA
P_{CPU}	Power dissipation of PowerPC® 405 processor block		0.9		mW/MHz
P_{RXTX}	Power dissipation of RocketIO @ 3.125 Gb/s per channel		350		mW
	Power dissipation of RocketIO @ 2.5 Gb/s per channel		310		mW
	Power dissipation of RocketIO @ 1.25 Gb/s per channel		230		mW

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 599 of 947

Table 4: **Quiescent Supply Current**

Symbol	Description	Device	Min	Typ	Max	Units
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC2VP2				mA
		XC2VP4		150		mA
		XC2VP7		175	500	mA
		XC2VP20		225	600	mA
		XC2VP30				mA
		XC2VP40				mA
		XC2VP50				mA
		XC2VP70				mA
		XC2VP100				mA
		XC2VP125				mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC2VP2				mA
		XC2VP4		2		mA
		XC2VP7		2	8	mA
		XC2VP20		2	8	mA
		XC2VP30				mA
		XC2VP40				mA
		XC2VP50				mA
		XC2VP70				mA
		XC2VP100				mA
		XC2VP125				mA
I_{CCAUXQ}	Quiescent V_{CCAUX} supply current	XC2VP2				mA
		XC2VP4		5		mA
		XC2VP7		10	50	mA
		XC2VP20		10	50	mA
		XC2VP50				mA
		XC2VP40				mA
		XC2VP50				mA
		XC2VP70				mA
		XC2VP100				mA
		XC2VP125				mA

Notes:
1. Quiescent current parameter values are specified for Commercial Grade.
2. With no output current loads, no active input pull-up resistors, all I/O pins are 3-state and floating.
3. If DCI or differential signaling is used, more accurate quiescent current estimates can be obtained by using the Power Estimator or XPOWER™.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 600 of 947

Power-On Power Supply Requirements

Xilinx FPGAs require a certain amount of supply current during power-on to insure proper device initialization. The actual current consumed depends on the power-on ramp rate of the power supply.

The V_{CCINT} power supply must ramp on no faster than 200 µs and no slower than 50 ms. Ramp-on is defined as: 0 V_{DC} to minimum supply voltages (see Table 2).

V_{CCAUX} and V_{CCO} can power on at any ramp rate. Power supplies can be turned on in any sequence, though V_{CCAUX} must power on before or with V_{CCO} for the specifications shown in Table 5 to apply.

Table 5 shows the minimum current required by Virtex-II Pro devices for proper power-on and configuration.

If the current minimums shown in Table 5 are met, the device powers on properly after all three supplies have passed through their power-on reset threshold voltages.

Once initialized and configured, use the power calculator to estimate current drain on these supplies.

For more information on V_{CCAUX}, V_{CCO}, and configuration mode, refer to Chapter 3 in the *Virtex-II Pro Platform FPGA User Guide*.

Table 5: **Power-On Current for Virtex-II Pro Devices**

Symbol	Device										Units
	XC2VP2	XC2VP4	XC2VP7	XC2VP20	XC2VP30	XC2VP40	XC2VP50	XC2VP70	XC2VP100	XC2VP125	
$I_{CCINTMIN}$	500	500	500	600	TBD	TBD	TBD	TBD	TBD	TBD	mA
$I_{CCAUXMIN}$	250	250	250	250	250	250	250	250	250	250	mA
I_{CCOMIN}	100	100	100	100	100	100	100	100	100	100	mA

Notes:
1. Power-on current parameter values are specified for Commercial Grade.

General Power Supply Requirements

Proper decoupling of all FPGA power supplies is essential. Consult Xilinx **Application Note 623** for detailed information on power distribution system design.

V_{CCAUX} powers critical resources in the FPGA. Therefore, this supply voltage is especially susceptible to power supply noise. V_{CCAUX} can share a power plane with V_{CCO}, but only if V_{CCO} does not have excessive noise. Staying within simultaneously switching output (SSO) limits is essential for keeping power supply noise to a minimum. More information on SSO is available at **support.xilinx.com** in Xilinx Answer Record 11713.

Changes in V_{CCAUX} voltage beyond 200 mV peak-to-peak should take place at a rate no faster than 10 mV per millisecond.

Recommended practices that can help reduce jitter and period distortion are described in Xilinx Answer Record 13756.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 601/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 601 of 947

SelectIO-Ultra DC Input and Output Levels

Values for V_{IL} and V_{IH} are recommended input voltages. Values for I_{OL} and I_{OH} are guaranteed over the recommended operating conditions at the V_{OL} and V_{OH} test points. Only selected standards are tested. These are chosen to ensure that all standards meet their specifications. The selected standards are tested at minimum V_{CCO} with the respective V_{OL} and V_{OH} voltage levels shown. Other standards are sample tested.

Table 6: **DC Input and Output Levels**

Input/Output Standard	V_{IL}		V_{IH}		V_{OL}	V_{OH}	I_{OL}	I_{OH}
	V, min	V, max	V, min	V, max	V, max	V, min	mA	mA
LVTTL	–0.2	0.8	2.0	3.45	0.4	2.4	24	–24
LVCMOS33	–0.2	0.8	2.0	3.45	0.4	V_{CCO} – 0.4	24	–24
LVCMOS25	–0.2	0.7	1.7	V_{CCO} + 0.4	0.4	V_{CCO} – 0.4	24	–24
LVCMOS18	–0.2	30% V_{CCO}	70% V_{CCO}	V_{CCO} + 0.4	0.4	V_{CCO} – 0.45	16	–16
LVCMOS15	–0.2	30% V_{CCO}	70% V_{CCO}	V_{CCO} + 0.4	0.4	V_{CCO} – 0.45	16	–16
PCI33_3	–0.2	30% V_{CCO}	50% V_{CCO}	3.6	10% V_{CCO}	90% V_{CCO}		
PCI66_3	–0.2	30% V_{CCO}	50% V_{CCO}	3.6	10% V_{CCO}	90% V_{CCO}		
PCI-X	–0.2	Note (1)	Note (1)	Note (1)	Note (1)	Note (1)	Note (1)	Note (1)
GTLP	–0.2	V_{REF} – 0.1	V_{REF} + 0.1	V_{CCO} + 0.4	0.6	n/a	36	n/a
GTL	–0.2	V_{REF} – 0.05	V_{REF} + 0.05	V_{CCO} + 0.4	0.4	n/a	40	n/a
HSTL I	–0.2	V_{REF} – 0.1	V_{REF} + 0.1	V_{CCO} + 0.4	0.4(2)	V_{CCO} – 0.4	8(2)	–8(2)
HSTL II	–0.2	V_{REF} – 0.1	V_{REF} + 0.1	V_{CCO} + 0.4	0.4(2)	V_{CCO} – 0.4	16(2)	–16(2)
HSTL III	–0.2	V_{REF} – 0.1	V_{REF} + 0.1	V_{CCO} + 0.4	0.4(2)	V_{CCO} – 0.4	24(2)	–8(2)
HSTL IV	–0.2	V_{REF} – 0.1	V_{REF} + 0.1	V_{CCO} + 0.4	0.4(2)	V_{CCO} – 0.4	48(2)	–8(2)
SSTL2 I	–0.2	V_{REF} – 0.15	V_{REF} + 0.15	V_{CCO} + 0.3	V_{TT} – 0.61	V_{TT} + 0.61	8.1	–8.1
SSTL2 II	–0.2	V_{REF} – 0.15	V_{REF} + 0.15	V_{CCO} + 0.3	V_{TT} – 0.81	V_{TT} + 0.81	16.2	–16.2
SSTL18 I	–0.2	V_{REF} – 0.125	V_{REF} + 0.125	V_{CCO} + 0.3	V_{TT} – 0.61	V_{TT} + 0.61	6.7	–6.7
SSTL18 II	–0.2	V_{REF} – 0.125	V_{REF} + 0.125	V_{CCO} + 0.3	V_{TT} – 0.61	V_{TT} + 0.61	13.4	–13.4

Notes:
1. Tested according to relevant specifications.
2. This applies to 1.5V and 1.8V HSTL.

LDT DC Specifications (LDT_25)

Table 7: **LDT DC Specifications**

DC Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Voltage	V_{CCO}		2.38	2.5	2.63	V
Differential Output Voltage	V_{OD}	R_T = 100 ohm across Q and $\overline{Q}$ signals	495	600	715	mV
Change in V_{OD} Magnitude	ΔV_{OD}		–15		15	mV
Output Common Mode Voltage	V_{OCM}	R_T = 100 ohm across Q and $\overline{Q}$ signals	495	600	715	mV
Change in V_{OS} Magnitude	ΔV_{OCM}		–15		15	mV
Input Differential Voltage	V_{ID}		200	600	1000	mV
Change in V_{ID} Magnitude	ΔV_{ID}		–15		15	mV
Input Common Mode Voltage	V_{ICM}		440	600	780	mV
Change in V_{ICM} Magnitude	ΔV_{ICM}		–15		15	mV

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 602 of 947

LVDS DC Specifications (LVDS_25)

Table 8: **LVDS DC Specifications**

DC Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Voltage	V_{CCO}		2.38	2.5	2.63	V
Output High Voltage for Q and $\overline{Q}$	V_{OH}	R_T = 100 Ω across Q and $\overline{Q}$ signals			1.602	V
Output Low Voltage for Q and $\overline{Q}$	V_{OL}	R_T = 100 Ω across Q and $\overline{Q}$ signals	0.898			V
Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	V_{ODIFF}	R_T = 100 Ω across Q and $\overline{Q}$ signals	247	350	454	mV
Output Common-Mode Voltage	V_{OCM}	R_T = 100 Ω across Q and $\overline{Q}$ signals	1.125	1.250	1.375	V
Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	V_{IDIFF}	Common-mode input voltage = 1.25V	100	350	600	mV
Input Common-Mode Voltage	V_{ICM}	Differential input voltage = ±350 mV	0.3	1.2	2.2	V

Extended LVDS DC Specifications (LVDSEXT_25)

Table 9: **Extended LVDS DC Specifications**

DC Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Voltage	V_{CCO}		2.38	2.5	2.63	V
Output High Voltage for Q and $\overline{Q}$	V_{OH}	R_T = 100 Ω across Q and $\overline{Q}$ signals			1.785	V
Output Low Voltage for Q and $\overline{Q}$	V_{OL}	R_T = 100 Ω across Q and $\overline{Q}$ signals	0.715			V
Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	V_{ODIFF}	R_T = 100 Ω across Q and $\overline{Q}$ signals	440		820	mV
Output Common-Mode Voltage	V_{OCM}	R_T = 100 Ω across Q and $\overline{Q}$ signals	1.125	1.250	1.375	V
Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	V_{IDIFF}	Common-mode input voltage = 1.25V	100		1000	mV
Input Common-Mode Voltage	V_{ICM}	Differential input voltage = ±350 mV	0.3	1.2	2.2	V

LVPECL DC Specifications (LVPECL_25)

These values are valid when driving a 100 Ω differential load only, i.e., a 100 Ω resistor between the two receiver pins. The V_{OH} levels are 200 mV below standard LVPECL levels and are compatible with devices tolerant of lower common-mode ranges. Table 10 summarizes the DC output specifications of LVPECL. For more information on using LVPECL, see the *Virtex-II Pro Platform FPGA User Guide*.

Table 10: **LVPECL DC Specifications**

DC Parameter	V_{CCO} = 2.375V		V_{CCO} = 2.5V		V_{CCO} = 2.625V		Units
	Min	Max	Min	Max	Min	Max	
V_{OH}	1.35	1.495	1.475	1.62	1.6	1.745	V
V_{OL}	0.565	0.755	0.69	0.88	0.815	1.005	V
V_{IH}	0.8	2.0	0.8	2.0	0.8	2.0	V
V_{IL}	0.5	1.7	0.5	1.7	0.5	1.7	V
Differential Input Voltage	0.100	-	0.100	-	0.100	-	V

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 603/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 603 of 947

RocketIO DC Input and Output Levels

Table 11: **RocketIO DC Specifications**

DC Parameter	Symbol	Conditions	Min	Typ	Max	Units
Peak-to-Peak Differential Input Voltage	DV_{IN}		175		2000	mV
Single-Ended Output Voltage Swing(1,2)	DV_{OUT}			400		mV
				500		mV
				600		mV
				700		mV
				800		mV
Peak-to-Peak Differential Output Voltage(1,2)	DV_{PPOUT}			800		mV
				1000		mV
				1200		mV
				1400		mV
				1600		mV

Notes:
1. Output swing levels are selectable using TX_DIFF_CTRL attribute. Refer to the *RocketIO Transceiver User Guide* for details.
2. Output preemphasis levels are selectable at 10% (default), 20%, 25%, and 33% using the TX_PREEMPHASIS attribute. Refer to the *RocketIO Transceiver User Guide* or Chapter 2 in the *Virtex-II Pro Platform FPGA User Guide* for details.

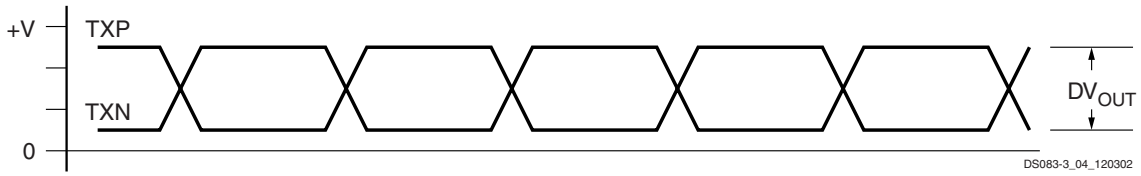


Figure 1: **Single-Ended Output Voltage Swing**

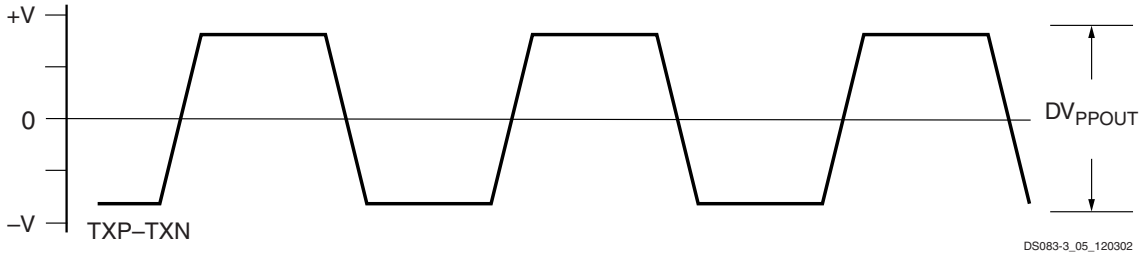


Figure 2: **Peak-to-Peak Differential Output Voltage**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 604 of 947

Virtex-II Pro Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Virtex-II Pro devices. The numbers reported here are fully characterized worst-case values. Note that these values are subject to the same guidelines as Virtex-II Pro Switching Characteristics (speed files).

Table 12 provides pin-to-pin values (in nanoseconds) including IOB delays; that is, delay through the device from input pin to output pin. In the case of multiple inputs and outputs, the worst delay is reported.

Table 12: **Pin-to-Pin Performance**

	Pin-to-Pin (w/ I/O delays)				
Description	**-7**	**-6**	**-5**	**Units**	**Device Used & Speed Grade**
Basic Functions:					
16-bit Address Decoder				ns	XC2VP20FF1152-6
32-bit Address Decoder				ns	XC2VP20FF1152-6
64-bit Address Decoder				ns	XC2VP20FF1152-6
4:1 MUX				ns	XC2VP20FF1152-6
8:1 MUX				ns	XC2VP20FF1152-6
16:1 MUX				ns	XC2VP20FF1152-6
32:1 MUX				ns	XC2VP20FF1152-6
Combinatorial (pad to LUT to pad)				ns	XC2VP20FF1152-6
Memory:					
Block RAM					
Pad to setup				ns	XC2VP20FF1152-6
Clock to Pad				ns	XC2VP20FF1152-6
Distributed RAM					
Pad to setup				ns	XC2VP20FF1152-6
Clock to Pad				ns	XC2VP20FF1152-6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 605 of 947

Table 13 shows internal (register-to-register) performance. Values are reported in MHz.

Table 13: **Register-to-Register Performance**

	Register-to-Register Performance				
Description	**-7**	**-6**	**-5**	**Units**	**Device Used & Speed Grade**
Basic Functions:					
16-bit Address Decoder				MHz	XC2VP20FF1152-6
32-bit Address Decoder				MHz	XC2VP20FF1152-6
64-bit Address Decoder				MHz	XC2VP20FF1152-6
4:1 MUX				MHz	XC2VP20FF1152-6
8:1 MUX				MHz	XC2VP20FF1152-6
16:1 MUX				MHz	XC2VP20FF1152-6
32:1 MUX				MHz	XC2VP20FF1152-6
Register to LUT to Register				MHz	XC2VP20FF1152-6
8-bit Adder				MHz	XC2VP20FF1152-6
16-bit Adder				MHz	XC2VP20FF1152-6
32-bit Adder				MHz	XC2VP20FF1152-6
64-bit Adder				MHz	XC2VP20FF1152-6
128-bit Adder				MHz	XC2VP20FF1152-6
24-bit Counter				MHz	XC2VP20FF1152-6
64-bit Counter				MHz	XC2VP20FF1152-6
64-bit Accumulator				MHz	XC2VP20FF1152-6
Multiplier 18x18 (with Block RAM inputs)				MHz	XC2VP20FF1152-6
Multiplier 18x18 (with Register inputs)				MHz	XC2VP20FF1152-6
Memory:					
Block RAM					
Single-Port 4096 x 4 bits				MHz	XC2VP20FF1152-6
Single-Port 2048 x 9 bits				MHz	XC2VP20FF1152-6
Single-Port 1024 x 18 bits				MHz	XC2VP20FF1152-6
Single-Port 512 x 36 bits				MHz	XC2VP20FF1152-6
Dual-Port A:4096 x 4 bits & B:1024 x 18 bits				MHz	XC2VP20FF1152-6
Dual-Port A:1024 x 18 bits & B:1024 x 18 bits				MHz	XC2VP20FF1152-6
Dual-Port A:2048 x 9 bits & B: 512 x 36 bits				MHz	XC2VP20FF1152-6
Distributed RAM					
Single-Port 16 x 8-bit				MHz	XC2VP20FF1152-6
Single-Port 32 x 8-bit				MHz	XC2VP20FF1152-6
Single-Port 64 x 8-bit				MHz	XC2VP20FF1152-6
Single-Port 128 x 8-bit				MHz	XC2VP20FF1152-6
Dual-Port 16 x 8-bit				MHz	XC2VP20FF1152-6
Dual-Port 32 x 8-bit				MHz	XC2VP20FF1152-6
Dual-Port 64 x 8-bit				MHz	XC2VP20FF1152-6
Dual-Port 128 x 8-bit				MHz	XC2VP20FF1152-6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 606 of 947

Table 13: **Register-to-Register Performance *(Continued)***

	Register-to-Register Performance				
Description	**-7**	**-6**	**-5**	**Units**	**Device Used & Speed Grade**
Shift Registers					
128-bit SRL				MHz	XC2VP20FF1152-6
256-bit SRL				MHz	XC2VP20FF1152-6
FIFOs (Async. in Block RAM)					
1024 x 18-bit				MHz	XC2VP20FF1152-6
1024 x 18-bit				MHz	XC2VP20FF1152-6
FIFOs (Sync. in SRL)					
128 x 8-bit				MHz	XC2VP20FF1152-6
128 x 16-bit				MHz	XC2VP20FF1152-6
CAMs in Block RAM					
32 x 9-bit				MHz	XC2VP20FF1152-6
64 x 9-bit				MHz	XC2VP20FF1152-6
128 x 9-bit				MHz	XC2VP20FF1152-6
256 x 9-bit				MHz	XC2VP20FF1152-6
CAMs in SRL					
32 x 16-bit				MHz	XC2VP20FF1152-6
64 x 32-bit				MHz	XC2VP20FF1152-6
128 x 40-bit				MHz	XC2VP20FF1152-6
256 x 48-bit				MHz	XC2VP20FF1152-6
1024 x 16-bit				MHz	XC2VP20FF1152-6
1024 x 72-bit				MHz	XC2VP20FF1152-6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 607 of 947

Virtex-II Pro Switching Characteristics

Switching characteristics are specified on a per-speed-grade basis and can be designated as Advance, Preliminary, or Production. Note that Virtex-II Pro Performance Characteristics are subject to these guidelines, as well. Each designation is defined as follows:

Advance: These speed files are based on simulations only and are typically available soon after device design specifications are frozen. Although speed grades with this designation are considered relatively stable and conservative, some under-reporting might still occur.

Preliminary: These speed files are based on complete ES (engineering sample) silicon characterization. Devices and speed grades with this designation are intended to give a better indication of the expected performance of production silicon. The probability of under-reporting delays is greatly reduced as compared to Advance data.

Production: These speed files are released once enough production silicon of a particular device family member has been characterized to provide full correlation between speed files and devices over numerous production lots. There is no under-reporting of delays, and customers receive formal notification of any subsequent changes. Typically, the slowest speed grades transition to Production before faster speed grades.

Since individual family members are produced at different times, the migration from one category to another depends completely on the status of the fabrication process for each device. Table 14 correlates the current status of each Virtex-II Pro device with a corresponding speed file designation.

All specifications are always representative of worst-case supply voltage and junction temperature conditions.

Table 14: **Virtex-II Pro Device Speed Grade Designations**

Device	Speed Grade Designations		
	Advance	Preliminary	Production
XC2VP2	-7, -6, -5		
XC2VP4	-7, -6, -5		
XC2VP7	-7	-6	-5
XC2VP20	-7	-6	-5
XC2VP30			
XC2VP40			
XC2VP50	-7, -6, -5		
XC2VP70			
XC2VP100			
XC2VP125			

Testing of Switching Characteristics

All devices are 100% functionally tested. Internal timing parameters are derived from measuring internal test patterns. Listed below are representative values. For more specific, more precise, and worst-case guaranteed data, use the values reported by the static timing analyzer (TRCE in the Xilinx Development System) and back-annotate to the simulation net list. Unless otherwise noted, values apply to all Virtex-II Pro devices.

PowerPC Switching Characteristics

Table 15: **Processor Clocks Absolute AC Characteristics**

	Speed Grade						
	-7		-6		-5		
Description	Min	Max	Min	Max	Min	Max	Units
CPMC405CLOCK frequency	0	400	0	350	0	300	MHz
JTAGC405TCK frequency(1)	0	200	0	175	0	150	MHz
PLBCLK(2)	0	400	0	350	0	300	MHz
BRAMDSOCMCLK(2)	0	‘400	0	350	0	300	MHz
BRAMISOCMCLK(2)	0	400	0	350	0	300	MHz

Notes:
1. The theoretical maximum frequency of this clock is one-half the CPMC405CLOCK. However, the achievable maximum is dependent on the system, and will be much less.
2. The theoretical maximum frequency of these clocks is equal to the CPMC405CLOCK. However, the achievable maximum is dependent on the system. Please see ***PowerPC 405 Processor Block Reference Guide*** and **XAPP640** for more information.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 608 of 947

Table 16: **Processor Block Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (CPMC405CLOCK)					
Device Control Register Bus control inputs	$T_{PCCK\_}DCR/T_{PCKC\_}DCR$	0.38/–0.18	0.44/–0.20	0.48/–0.23	ns, min
Device Control Register Bus data inputs	$T_{PDCK\_}DCR/T_{PCKD\_}DCR$	0.65/–0.01	0.75/–0.01	0.82/–0.02	ns, min
Clock and Power Management control inputs	$T_{PCCK\_}CPM/T_{PCKC\_}CPM$	0.16/ 0.03	0.19/ 0.03	0.20/ 0.03	ns, min
Reset control inputs	$T_{PCCK\_}RST/T_{PCKC\_}RST$	0.16/ 0.03	0.19/ 0.03	0.20/ 0.03	ns, min
Debug control inputs	$T_{PCCK\_}DBG/T_{PCKC\_}DBG$	0.27/ 0.30	0.31/ 0.35	0.34/ 0.38	ns, min
Trace control inputs	$T_{PCCK\_}TRC/T_{PCKC\_}TRC$	1.37/–0.41	1.57/–0.48	1.73/–0.52	ns, min
External Interrupt Controller control inputs	$T_{PCCK\_}EIC/T_{PCKC\_}EIC$	0.57/–0.22	0.66/–0.25	0.72/–0.27	ns, min
Clock to Out					
Device Control Register Bus control outputs	$T_{PCKCO\_}DCR$	1.32	1.52	1.67	ns, max
Device Control Register Bus address outputs	$T_{PCKAO\_}DCR$	1.72	1.98	2.17	ns, max
Device Control Register Bus data outputs	$T_{PCKDO\_}DCR$	1.76	2.02	2.22	ns, max
Clock and Power Management control outputs	$T_{PCKCO\_}CPM$	1.26	1.45	1.59	ns, max
Reset control outputs	$T_{PCKCO\_}RST$	1.32	1.51	1.66	ns, max
Debug control outputs	$T_{PCKCO\_}DBG$	1.94	2.22	2.44	ns, max
Trace control outputs	$T_{PCKCO\_}TRC$	1.35	1.56	1.71	ns, max
Clock					
CPMC405CLOCK minimum pulse width, high	T_{CPWH}				ns, min
CPMC405CLOCK minimum pulse width, low	T_{CPWL}				ns, min

Table 17: **Processor Block PLB Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (PLBCLK)					
Processor Local Bus(ICU/DCU) control inputs	$T_{PCCK\_}PLB/T_{PCKC\_}PLB$	0.98/ 0.18	1.12/ 0.21	1.23/ 0.23	ns, min
Processor Local Bus (ICU/DCU) data inputs	$T_{PDCK\_}PLB/T_{PCKD\_}PLB$	0.62/ 0.16	0.71/ 0.18	0.78/ 0.20	ns, min
Clock to Out					
Processor Local Bus(ICU/DCU) control outputs	$T_{PCKCO\_}PLB$	1.34	1.54	1.69	ns, max
Processor Local Bus(ICU/DCU) address bus outputs	$T_{PCKAO\_}PLB$	1.16	1.34	1.47	ns, max
Processor Local Bus(ICU/DCU) data bus outputs	$T_{PCKDO\_}PLB$	1.44	1.65	1.81	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 609/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 609 of 947

Table 18: **Processor Block JTAG Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (JTAGC405TCK)					
JTAG control inputs	$T_{PCCK_}$JTAG/ $T_{PCKC_}$JTAG	0.80/ 0.70	0.80/ 0.70	0.88/ 0.77	ns, min
JTAG reset input	$T_{PCCK_}$JTAGRST/ $T_{PCKC_}$JTAGRST	0.80/ 0.70	0.80/ 0.70	0.88/ 0.77	ns, min
Clock to Out					
JTAG control outputs	$T_{PCKCO_}$JTAG	1.34	1.54	1.69	ns, max

Table 19: **PowerPC 405 Data-Side On-Chip Memory Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (BRAMDSOCMCLK)					
Data-Side On-Chip Memory data bus inputs	$T_{PDCK_}$DSOCM/ $T_{PCKD_}$DSOCM	0.73/ 0.83	0.84/ 0.95	0.92/ 1.05	ns, min
Clock to Out					
Data-Side On-Chip Memory control outputs	$T_{PCKCO_}$DSOCM	1.58	1.82	1.99	ns, max
Data-Side On-Chip Memory address bus outputs	$T_{PCKAO_}$DSOCM	1.46	1.68	1.84	ns, max
Data-Side On-Chip Memory data bus outputs	$T_{PCKDO_}$DSOCM	0.90	1.03	1.13	ns, max

Table 20: **PowerPC 405 Instruction-Side On-Chip Memory Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (BRAMISOCMCLK)					
Instruction-Side On-Chip Memory data bus inputs	$T_{PDCK_}$ISOCM/ $T_{PCKD_}$ISOCM	0.81/ 0.68	0.93/ 0.78	1.02/ 0.86	ns, min
Clock to Out					
Instruction-Side On-Chip Memory control outputs	$T_{PCKCO_}$ISOCM	1.33	1.53	1.68	ns, max
Instruction-Side On-Chip Memory address bus outputs	$T_{PCKAO_}$ISOCM	1.52	1.75	1.92	ns, max
Instruction-Side On-Chip Memory data bus outputs	$T_{PCKDO_}$ISOCM	1.35	1.55	1.70	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 610 of 947

RocketIO Switching Characteristics

Table 21: **RocketIO Reference Clock Switching Characteristics**

			All Speed Grades			
Description	**Symbol**	**Conditions**	**Min**	**Typ**	**Max**	**Units**
Reference Clock frequency range(1)	F_{GCLK}	Full rate operation	50		156.25	MHz
		Half rate operation	60		100	MHz
Reference Clock frequency tolerance	F_{GTOL}				±100	ppm
Reference Clock rise time	T_{RCLK}	20% – 80%		600	1000	ps
Reference Clock fall time	T_{FCLK}	20% – 80%		600	1000	ps
Reference Clock duty cycle	T_{DCREF}		45	50	55	%
Reference Clock total jitter, peak-peak(2)	T_{GJTT}	3.125 Gbps operation			40	ps
		2.5 Gbps operation			50	ps
		1.06 Gbps operation			120	ps
Clock recovery frequency acquisition time	T_{LOCK}			10		µs
Clock recovery phase acquisition time	T_{PHASE}			960		bits

Notes:
1. BREFCLK/BREFCLK2 can be used for all serial bit rates up to the maximum shown. REFCLK/REFCLK2 can be used for serial bit rates up to 2.5 Gb/s (REFCLK = 125 MHz). All other parameters apply equally to REFCLK, REFCLK2, BREFCLK, and BREFCLK2 except as noted.
2. Measured at the package pin. For reference clock frequencies equal to or above 125 MHz, BREFCLK/BREFCLK2 must be used.

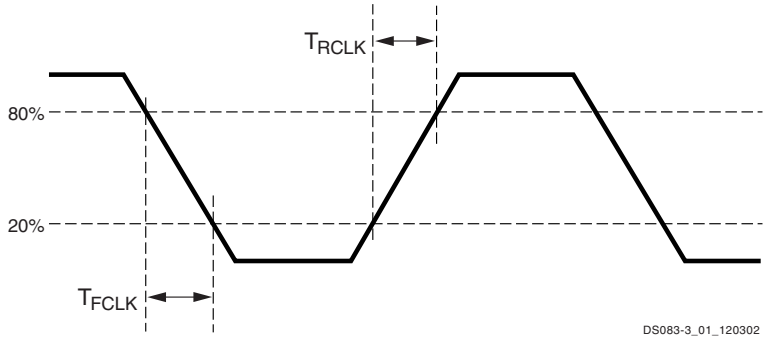


Figure 3: **Reference Clock Timing Parameters**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 611/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 611 of 947

Table 22: **RocketIO Receiver Switching Characteristics**

Description	Symbol	Conditions	Min	Typ	Max	Units
Receive total jitter tolerance	T_{JTOL}				0.65	UI(1)
Receive deterministic jitter tolerance	T_{DJTOL}				0.41	UI
Receive latency(2)	T_{RXLAT}			25	42	RXUSRCLK cycles
RXUSRCLK duty cycle	T_{RXDC}		45	50	55	%
RXUSRCLK2 duty cycle	T_{RX2DC}		45	50	55	%
Bit error rate	BER				10^{-12}	

Notes:
1. UI = Unit Interval
2. Receive latency delay RXP/RXN to RXDATA. Refer to ***RocketIO Transceiver User Guide*** for more information on calculating latency.

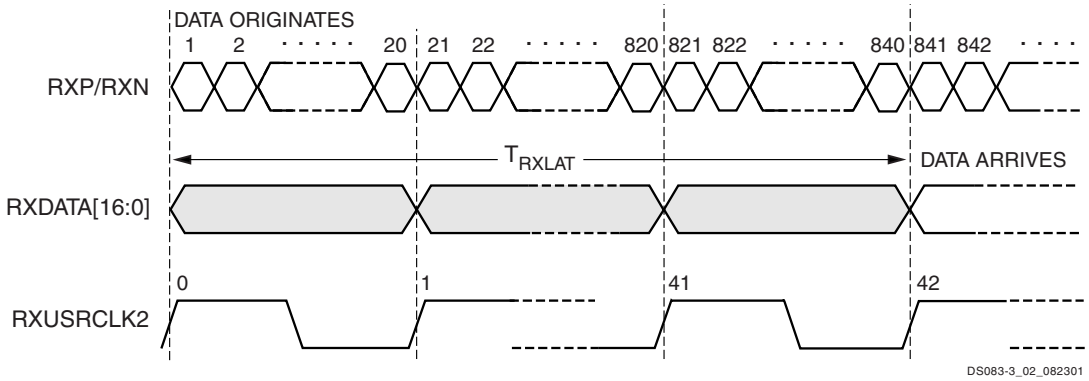


Figure 4: **Receive Latency (Maximum)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 612 of 947

Table 23: **RocketIO Transmitter Switching Characteristics**

Description	Symbol	Conditions	Min	Typ	Max	Units
Serial data rate, full-speed clock	F_{GTX}	Flipchip packages	1.0		3.125(1)	Gb/s
		Wirebond packages	1.0		2.5(1)	Gb/s
Serial data rate, half-speed clock		Flipchip packages	0.600		1.0	Gb/s
		Wirebond packages	0.600		1.0	Gb/s
Serial data output deterministic jitter	T_{DJ}				0.17	UI(2)
Serial data output random jitter	T_{RJ}				0.18	UI
TX rise time	T_{RTX}	20% – 80%		120		ps
TX fall time	T_{FTX}			120		ps
Transmit latency(3)	T_{TXLAT}	Including CRC		14	17	TXUSRCLK cycles
		Excluding CRC		8	11	
TXUSRCLK duty cycle	T_{TXDC}		45	50	55	%
TXUSRCLK2 duty cycle	T_{TX2DC}		45	50	55	%

Notes:
1. Serial data rate in the -5 speed grade is limited to 2.0 Gb/s in both wirebond and flipchip packages.
2. UI = Unit Interval
3. Transmit latency delay TXDATA to TXP/TXN. Refer to ***RocketIO Transceiver User Guide*** for more information on calculating latency.

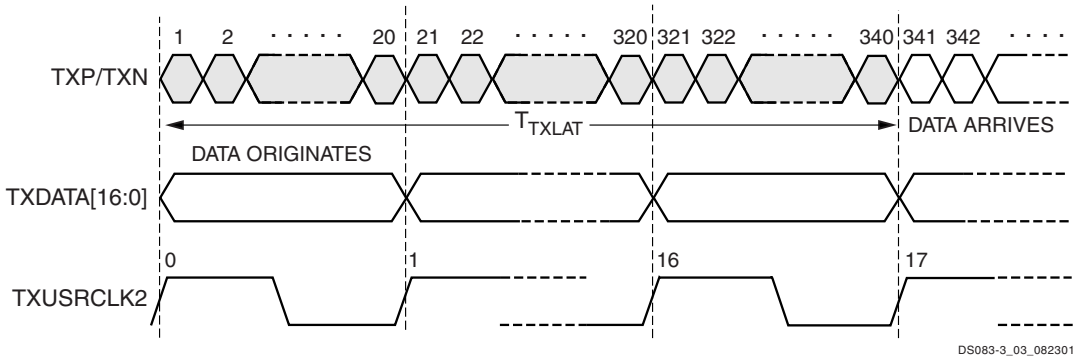


Figure 5: **Transmit Latency (Maximum, Including CRC)**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 613/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 613 of 947

Table 24: **RocketIO RXUSRCLK Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (RXUSRCLK)					
CHBONDI control inputs	$T_{GCCK\_}CHBI/T_{GCKC\_}CHBI$	0.00/ 0.12	0.00/ 0.12	0.00/ 0.14	ns, min
Clock to Out					
CHBONDO control outputs	$T_{GCKCO\_}CHBO$	0.50	0.50	0.55	ns, max
Clock					
RXUSRCLK minimum pulse width, High	$T_{GPWH\_}RX$	0.80	0.80	0.88	ns, min
RXUSRCLK minimum pulse width, Low	$T_{GPWL\_}RX$	0.40	0.40	0.44	ns, min

Table 25: **RocketIO RXUSRCLK2 Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (RXUSRCLK2)					
RXRESET control input	$T_{GCCK\_}RRST/T_{GCKC\_}RRST$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
RXPOLARITY control input	$T_{GCCK\_}RPOL/T_{GCKC\_}RPOL$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
ENCHANSYNC control input	$T_{GCCK\_}ECSY/T_{GCKC\_}ECSY$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
Clock to Out					
RXNOTINTABLE status outputs	$T_{GCKST\_}RNIT$	0.50	0.50	0.55	ns, max
RXDISPERR status outputs	$T_{GCKST\_}RDERR$	0.50	0.50	0.55	ns, max
RXCHARISCOMMA status outputs	$T_{GCKST\_}RCMCH$	0.50	0.50	0.55	ns, max
RXREALIGN status output	$T_{GCKST\_}ALIGN$	0.41	0.41	0.46	ns, max
RXCOMMADET status output	$T_{GCKST\_}CMDT$	0.41	0.41	0.46	ns, max
RXLOSSOFSYNC status outputs	$T_{GCKST\_}RLOS$	0.50	0.50	0.55	ns, max
RXCLKCORCNT status outputs	$T_{GCKST\_}RCCCNT$	0.41	0.41	0.46	ns, max
RXBUFSTATUS status outputs	$T_{GCKST\_}RBSTA$	0.45	0.45	0.50	ns, max
RXCHECKINGCRC status output	$T_{GCKST\_}RCCRC$	0.36	0.40	0.44	ns, max
RXCRCERR status output	$T_{GCKST\_}RCRCE$	0.36	0.40	0.44	ns, max
CHBONDDONE status output	$T_{GCKST\_}CHBD$	0.50	0.50	0.55	ns, max
RXCHARISK status outputs	$T_{GCKST\_}RKCH$	0.50	0.50	0.55	ns, max
RXRUNDISP status outputs	$T_{GCKST\_}RRDIS$	0.50	0.50	0.55	ns, max
RXDATA data outputs	$T_{GCKDO\_}RDAT$	0.50	0.50	0.55	ns, max
Clock					
RXUSRCLK2 minimum pulse width, High	$T_{GPWH\_}RX2$	1.44	1.44	2.25	ns, min
RXUSRCLK2 minimum pulse width, Low	$T_{GPWL\_}RX2$	0.72	0.72	1.13	ns, min

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 614 of 947

Table 26: **RocketIO TXUSRCLK Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Relative to Clock (TXUSRCLK2)					
CONFIGENABLE control input	$T_{GCCK\_}CFGEN/T_{GCKC\_}CFGEN$	0.35/ 0.10	0.35/ 0.10	0.39/ 0.11	ns, min
TXBYPASS8B10B control inputs	$T_{GCCK\_}TBYP/T_{GCKC\_}TBYP$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
TXFORCECRCERR control input	$T_{GCCK\_}TCRCE/T_{GCKC\_}TCRCE$	0.39/ 0.12	0.44/ 0.14	0.49/ 0.15	ns, min
TXPOLARITY control input	$T_{GCCK\_}TPOL/T_{GCKC\_}TPOL$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
TXINHIBIT control inputs	$T_{GCCK\_}TINH/T_{GCKC\_}TINH$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
LOOPBACK control inputs	$T_{GCCK\_}LBK/T_{GCKC\_}LBK$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
TXRESET control input	$T_{GCCK\_}TRST/T_{GCKC\_}TRST$	0.02/ 0.10	0.02/ 0.10	0.02/ 0.11	ns, min
TXCHARISK control inputs	$T_{GCCK\_}TKCH/T_{GCKC\_}TKCH$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
TXCHARDISPMODE control inputs	$T_{GCCK\_}TCDM/T_{GCKC\_}TCDM$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
TXCHARDISPVAL control inputs	$T_{GCCK\_}TCDV/T_{GCKC\_}TCDV$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
CONFIGIN data input	$T_{GDCK\_}CFGIN/T_{GCKD\_}CFGIN$	0.35/ 0.10	0.35/ 0.10	0.39/ 0.11	ns, min
TXDATA data inputs	$T_{GDCK\_}TDAT/T_{GCKD\_}TDAT$	0.02/ 0.00	0.02/ 0.00	0.02/ 0.00	ns, min
Clock to Out					
TXBUFERR status output	$T_{GCKST\_}TBERR$	0.54	0.54	0.60	ns, max
TXKERR status outputs	$T_{GCKST\_}TKERR$	0.41	0.41	0.46	ns, max
TXRUNDISP status outputs	$T_{GCKST\_}TRDIS$	0.41	0.41	0.46	ns, max
CONFIGOUT data output	$T_{GCKDO\_}CFGOUT$	0.25	0.25	0.28	ns, max
Clock					
TXUSRCLK minimum pulse width, High	$T_{GPWH\_}TX$	2.88	2.88	4.50	ns, min
TXUSRCLK minimum pulse width, Low	$T_{GPWL\_}TX$	1.44	1.44	2.25	ns, min
TXUSRCLK2 minimum pulse width, High	$T_{GPWH\_}TX2$	1.44	1.44	2.25	ns, min
TXUSRCLK2 minimum pulse width, Low	$T_{GPWL\_}TX2$	0.72	0.72	1.13	ns, min

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 615 of 947

IOB Input Switching Characteristics

Input delays associated with the pad are specified for LVCMOS 2.5V levels. For other standards, adjust the delays with the values shown in IOB Input Switching Characteristics Standard Adjustments.

Table 27: **IOB Input Switching Characteristics**

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
Propagation Delays						
Pad to I output, no delay	T_{IOPI}	All		0.87	0.91	ns, max
Pad to I output, with delay	T_{IOPID}	XC2VP2		2.07	2.26	ns, max
		XC2VP4		2.07	2.26	ns, max
		XC2VP7		2.07	2.26	ns, max
		XC2VP20		2.32	2.54	ns, max
		XC2VP30				ns, max
		XC2VP40				ns, max
		XC2VP50				ns, max
		XC2VP70				ns, max
		XC2VP100				ns, max
		XC2VP125				ns, max
Propagation Delays						
Pad to output IQ via transparent latch, no delay	T_{IOPLI}	All		0.89	0.93	ns, max
Pad to output IQ via transparent latch, with delay	T_{IOPLID}	XC2VP2		4.76	5.21	ns, max
		XC2VP4		4.76	5.21	ns, max
		XC2VP7		4.76	5.21	ns, max
		XC2VP20		3.62	3.86	ns, max
		XC2VP30				ns, max
		XC2VP40				ns, max
		XC2VP50				ns, max
		XC2VP70				ns, max
		XC2VP100				ns, max
		XC2VP125				ns, max
Clock CLK to output IQ	T_{IOCKIQ}	All		0.60	0.67	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 616 of 947

Table 27: **IOB Input Switching Characteristics *(Continued)***

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
Setup and Hold Times With Respect to Clock at IOB Input Register						
Pad, no delay	T_{IOPICK}/T_{IOICKP}	All		0.87/–0.17	0.91/–0.19	ns, min
Pad, with delay	$T_{IOPICKD}/T_{IOICKPD}$	XC2VP2		4.74/–3.27	5.19/–3.62	ns, max
		XC2VP4		4.74/–3.27	5.19/–3.62	ns, max
		XC2VP7		4.74/–3.27	5.19/–3.62	ns, max
		XC2VP20		3.60/–2.36	3.84/–2.53	ns, max
		XC2VP30				ns, max
		XC2VP40				ns, max
		XC2VP50				ns, max
		XC2VP70				ns, max
		XC2VP100				ns, max
		XC2VP125				ns, max
ICE input	$T_{IOICECK}/T_{IOCKICE}$	All		0.44/ 0.01	0.49/ 0.01	ns, min
SR input (IFF, synchronous)	$T_{IOSRCKI}$	All		0.67	0.75	ns, min
Set/Reset Delays						
SR input to IQ (asynchronous)	T_{IOSRIQ}	All		1.27	1.42	ns, max
GSR to output IQ	T_{GSRQ}	All		6.75	7.43	ns, max

Notes:
1. Input timing for LVCMOS25 is measured at 1.25V. For other I/O standards, see Table 31.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 617 of 947

IOB Input Switching Characteristics Standard Adjustments

Table 28: **IOB Input Switching Characteristics Standard Adjustments**

			Speed Grade			
Description	**Symbol**	**Standard**	**-7**	**-6**	**-5**	**Units**
Data Input Delay Adjustments						
Standard-specific data input delay adjustments	T_{ILVTTL}	LVTTL		0.08	0.09	ns
	$T_{ILVCMOS33}$	LVCMOS		0.05	0.05	ns
	$T_{ILVCMOS25}$	LVCMOS25		0.00	0.00	ns
	$T_{ILVCMOS18}$	LVCMOS18		0.33	0.36	ns
	$T_{ILVCMOS15}$	LVCMOS15		0.41	0.45	ns
	T_{ILVDS_25}	LVDS_25		0.36	0.40	ns
	T_{IPCI33_3}	PCI, 33 MHz, 3.3V		0.16	0.18	ns
	T_{IPCI66_3}	PCI, 66 MHz, 3.3V		0.17	0.19	ns
	T_{IPCIX}	PCI-X		0.13	0.15	ns
	T_{IGTL}	GTL		0.68	0.74	ns
	T_{IGTLP}	GTLP		0.72	0.79	ns
	T_{IHSTL_I}	HSTL_I		0.68	0.75	ns
	T_{IHSTL_II}	HSTL_II		0.68	0.75	ns
	T_{IHSTL_III}	HSTL_III		0.66	0.72	ns
	T_{IHSTL_IV}	HSTL_IV		0.67	0.74	ns
	$T_{IHSTL\_I\_18}$	HSTL_I_18		0.65	0.72	ns
	$T_{IHSTL\_II\_18}$	HSTL_II_18		0.63	0.69	ns
	$T_{IHSTL\_III\_18}$	HSTL_III_18		0.64	0.70	ns
	$T_{IHSTL\_IV\_18}$	HSTL_IV_18		0.65	0.71	ns
	T_{ISSTL2_I}	SSTL2_I		0.72	0.79	ns
	T_{ISSTL2_II}	SSTL2_II		0.73	0.81	ns
	$T_{ILVDCI33}$	LVDCI_33		–0.05	–0.06	ns
	$T_{ILVDCI25}$	LVDCI_25		0.00	0.00	ns
	$T_{ILVDCI18}$	LVDCI_18		0.09	0.09	ns
	$T_{ILVDCI15}$	LVDCI_15		0.15	0.17	ns
	$T_{ILVDCI\_DV2\_25}$	LVDCI_DV2_25		0.00	0.00	ns
	$T_{ILVDCI\_DV2\_18}$	LVDCI_DV2_18		0.09	0.09	ns
	$T_{ILVDCI\_DV2\_15}$	LVDCI_DV2_15		0.15	0.17	ns
	T_{IGTL_DCI}	GTL_DCI		0.57	0.62	ns
	T_{IGTLP_DCI}	GTLP_DCI		0.31	0.35	ns
	$T_{IHSTL\_I\_DCI}$	HSTL_I_DCI		0.31	0.35	ns
	$T_{IHSTL\_II\_DCI}$	HSTL_II_DCI		0.31	0.35	ns
	$T_{IHSTL\_III\_DCI}$	HSTL_III_DCI		0.31	0.35	ns
	$T_{IHSTL\_IV\_DCI}$	HSTL_IV_DCI		0.31	0.35	ns
	$T_{IHSTL\_I\_DCI\_18}$	HSTL_I_DCI_18		0.31	0.35	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 618/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 618 of 947

Table 28: **IOB Input Switching Characteristics Standard Adjustments *(Continued)***

			Speed Grade			
Description	**Symbol**	**Standard**	**-7**	**-6**	**-5**	**Units**
Standard-specific data input delay adjustments *(continued)*	$T_{IHSTL\_II\_DCI\_18}$	HSTL_II_DCI_18		0.31	0.35	ns
	$T_{IHSTL\_III\_DCI\_18}$	HSTL_III_DCI_18		0.31	0.35	ns
	$T_{IHSTL\_IV\_DCI\_18}$	HSTL_IV_DCI_18		0.31	0.35	ns
	$T_{ISSTL2\_I\_DCI}$	SSTL2_I_DCI		0.20	0.22	ns
	$T_{ISSTL2\_II\_DCI}$	SSTL2_II_DCI		0.20	0.22	ns
	$T_{ILVDSEXT\_25}$	LVDSEXT_25		0.37	0.41	ns
	T_{ILDT_25}	LDT_25		0.36	0.40	ns
	T_{IBLVDS_25}	BLVDS_25				ns
	T_{IULVDS_25}	ULVDS_25		0.36	0.40	ns
	$T_{ILVDS\_25\_DCI}$	LVDS_25_DCI		0.36	0.40	ns
	$T_{ILVDSEXT\_25\_DCI}$	LVDSEXT_25_DCI		0.37	0.41	ns
	$T_{ILVPECL\_25}$	LVPECL_25		0.80	0.88	ns
	$T_{ISSTL18\_I}$	SSTL18_I		0.72	0.79	ns
	$T_{ISSTL18\_II}$	SSTL18_II		0.73	0.81	ns
	$T_{ISSTL18\_I\_DCI}$	SSTL18_I_DCI		0.72	0.79	ns
	$T_{ISSTL18\_II\_DCI}$	SSTL18_II_DCI		0.73	0.81	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 619/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 619 of 947

IOB Output Switching Characteristics

Output delays terminating at a pad are specified for LVCMOS25 with 12 mA drive and fast slew rate. For other standards, adjust the delays with the values shown in IOB Output Switching Characteristics Standard Adjustments.

Table 29: **IOB Output Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Propagation Delays					
O input to Pad	T_{IOOP}		2.33	2.55	ns, max
O input to Pad via transparent latch	T_{IOOLP}		2.47	2.69	ns, max
3-State Delays					
T input to Pad high-impedance(2)	T_{IOTHZ}		1.36	1.53	ns, max
T input to valid data on Pad	T_{IOTP}		2.28	2.48	ns, max
T input to Pad high-impedance via transparent latch(2)	$T_{IOTLPHZ}$		1.23	1.38	ns, max
T input to valid data on Pad via transparent latch	$T_{IOTLPON}$		2.34	2.55	ns, max
GTS to Pad high-impedance(2)	T_{GTS}		4.73	5.20	ns, max
Sequential Delays					
Clock CLK to Pad	T_{IOCKP}		2.41	2.63	ns, max
Clock CLK to Pad high-impedance (synchronous)(2)	T_{IOCKHZ}		1.56	1.75	ns, max
Clock CLK to valid data on Pad (synchronous)	T_{IOCKON}		2.47	2.70	ns, max
Setup and Hold Times Before/After Clock CLK					
O input	T_{IOOCK}/T_{IOCKO}		0.26/ 0.14	0.29/ 0.15	ns, min
OCE input	$T_{IOOCECK}/T_{IOCKOCE}$		0.44/ 0.01	0.49/ 0.01	ns, min
SR input (OFF)	$T_{IOSRCKO}/T_{IOCKOSR}$		0.67/ 0.00	0.75/ 0.00	ns, min
3–State Setup Times, T input	T_{IOTCK}/T_{IOCKT}		0.26/ 0.14	0.29/ 0.15	ns, min
3-State Setup Times, TCE input	$T_{IOTCECK}/T_{IOCKTCE}$		0.44/ 0.01	0.49/ 0.01	ns, min
3-State Setup Times, SR input (TFF)	$T_{IOSRCKT}/T_{IOCKTSR}$		0.67/ 0.00	0.75/ 0.00	ns, min
Set/Reset Delays					
SR input to Pad (asynchronous)	T_{IOSRP}		3.21	3.53	ns, max
SR input to Pad high-impedance (asynchronous)(2)	T_{IOSRHZ}		2.17	2.44	ns, max
SR input to valid data on Pad (asynchronous)	T_{IOSRON}		3.09	3.39	ns, max
GSR to Pad	T_{IOGSRQ}		6.75	7.43	ns, max

Notes:
1. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.
2. The 3-state turn-off delays should not be adjusted.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 620 of 947

IOB Output Switching Characteristics Standard Adjustments

Output delays terminating at a pad are specified for LVCMOS25 with 12 mA drive and fast slew rate. For other standards, adjust the delays by the values shown.

Table 30: **IOB Output Switching Characteristics Standard Adjustments**

Output Delay Adjustments			Speed Grade			
Description	**Symbol**	**Standard**	**-7**	**-6**	**-5**	**Units**
Standard-specific adjustments for output delays terminating at pads (based on standard capacitive load, Csl)	T_{OLVDS_25}	LVDS		0.01	0.01	ns
	$T_{OLVDSEXT\_25}$	LVDSEXT		0.15	0.16	ns
	T_{OLDT_25}	LDT		0.14	0.16	ns
	T_{OBLVDS_25}	BLVDS		0.00	0.00	ns
	T_{OULVDS_25}	ULVDS		0.14	0.16	ns
	T_{OPCI33_3}	PCI, 33 MHz, 3.3V		0.75	0.83	ns
	T_{OPCI66_3}	PCI, 66 MHz, 3.3V		0.79	0.87	ns
	T_{OPCIX}	PCI-X		0.79	0.87	ns
	T_{OGTL}	GTL		1.41	1.55	ns
	T_{OGTLP}	GTLP		2.69	2.96	ns
	T_{OHSTL_I}	HSTL_I		0.64	0.70	ns
	T_{OHSTL_II}	HSTL_II		0.35	0.38	ns
	T_{OHSTL_IIII}	HSTL_III		0.35	0.39	ns
	T_{OHSTL_IV}	HSTL_IV		0.17	0.19	ns
	$T_{OHSTL\_I\_18}$	HSTL_I_18		0.64	0.70	ns
	$T_{OHSTL\_II\_18}$	HSTL_II_18		0.35	0.38	ns
	$T_{OHSTL\_IIII\_18}$	HSTL_III_18		0.41	0.45	ns
	$T_{OHSTL\_IV\_18}$	HSTL_IV_18		0.22	0.24	ns
	T_{OSSTL2_I}	SSTL2_I		0.72	0.79	ns
	T_{OSSTL2_II}	SSTL2_II		0.25	0.27	ns
	T_{OLVTTL_S2}	LVTTL, Slow, 2 mA		6.24	6.86	ns
	T_{OLVTTL_S4}	4 mA		3.55	3.91	ns
	T_{OLVTTL_S6}	6 mA		2.60	2.86	ns
	T_{OLVTTL_S8}	8 mA		1.69	1.86	ns
	T_{OLVTTL_S12}	12 mA		1.18	1.29	ns
	T_{OLVTTL_S16}	16 mA		0.53	0.58	ns
	T_{OLVTTL_S24}	24 mA		0.42	0.47	ns
	T_{OLVTTL_F2}	LVTTL, Fast, 2 mA		5.09	5.59	ns
	T_{OLVTTL_F4}	4 mA		2.24	2.46	ns
	T_{OLVTTL_F6}	6 mA		1.26	1.39	ns
	T_{OLVTTL_F8}	8 mA		0.46	0.51	ns
	T_{OLVTTL_F12}	12 mA		0.27	0.30	ns
	T_{OLVTTL_F16}	16 mA		0.06	0.07	ns
	T_{OLVTTL_F24}	24 mA		–0.01	–0.01	ns
	$T_{OLVCMOS33\_S2}$	LVCMOS33, Slow, 2 mA		6.23	6.86	ns
	$T_{OLVCMOS33\_S4}$	4 mA		3.61	3.97	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 621/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 621 of 947

Table 30: **IOB Output Switching Characteristics Standard Adjustments *(Continued)***

Output Delay Adjustments			Speed Grade			
Description	**Symbol**	**Standard**	**-7**	**-6**	**-5**	**Units**
Standard-specific adjustments for output delays terminating at pads (based on standard capacitive load, Csl) *(continued)*	$T_{OLVCMOS33\_S6}$	6 mA		2.60	2.86	ns
	$T_{OLVCMOS33\_S8}$	8 mA		1.69	1.86	ns
	$T_{OLVCMOS33\_S12}$	12 mA		1.18	1.30	ns
	$T_{OLVCMOS33\_S16}$	16 mA		0.52	0.57	ns
	$T_{OLVCMOS33\_S24}$	24 mA		0.44	0.49	ns
	$T_{OLVCMOS33\_F2}$	LVCMOS33, Fast, 2 mA		5.13	5.64	ns
	$T_{OLVCMOS33\_F4}$	4 mA		2.25	2.48	ns
	$T_{OLVCMOS33\_F6}$	6 mA		1.28	1.40	ns
	$T_{OLVCMOS33\_F8}$	8 mA		0.47	0.52	ns
	$T_{OLVCMOS33\_F12}$	12 mA		0.26	0.28	ns
	$T_{OLVCMOS33\_F16}$	16 mA		0.02	0.03	ns
	$T_{OLVCMOS33\_F24}$	24 mA		–0.08	–0.09	ns
	$T_{OLVCMOS25\_S2}$	LVCMOS25, Slow, 2 mA		4.74	5.21	ns
	$T_{OLVCMOS25\_S4}$	4 mA		2.80	3.07	ns
	$T_{OLVCMOS25\_S6}$	6 mA		2.02	2.22	ns
	$T_{OLVCMOS25\_S8}$	8 mA		1.19	1.31	ns
	$T_{OLVCMOS25\_S12}$	12 mA		0.87	0.96	ns
	$T_{OLVCMOS25\_S16}$	16 mA		0.47	0.52	ns
	$T_{OLVCMOS25\_S24}$	24 mA		0.26	0.28	ns
	$T_{OLVCMOS25\_F2}$	LVCMOS25, Fast, 2 mA		3.78	4.16	ns
	$T_{OLVCMOS25\_F4}$	4 mA		1.50	1.65	ns
	$T_{OLVCMOS25\_F6}$	6 mA		0.71	0.78	ns
	$T_{OLVCMOS25\_F8}$	8 mA		0.23	0.25	ns
	$T_{OLVCMOS25\_F12}$	12 mA		0.00	0.00	ns
	$T_{OLVCMOS25\_F16}$	16 mA		–0.03	–0.04	ns
	$T_{OLVCMOS25\_F24}$	24 mA		–0.18	–0.20	ns
	$T_{OLVCMOS18\_S2}$	LVCMOS18, Slow, 2 mA		4.83	5.31	ns
	$T_{OLVCMOS18\_S4}$	4 mA		3.18	3.49	ns
	$T_{OLVCMOS18\_S6}$	6 mA		2.20	2.41	ns
	$T_{OLVCMOS18\_S8}$	8 mA		2.20	2.42	ns
	$T_{OLVCMOS18\_S12}$	1 mA		1.81	1.99	ns
	$T_{OLVCMOS18\_S16}$	16 mA		0.87	0.96	ns
	$T_{OLVCMOS18\_F2}$	LVCMOS18, Fast, 2 mA		2.69	2.95	ns
	$T_{OLVCMOS18\_F4}$	4 mA		0.81	0.89	ns
	$T_{OLVCMOS18\_F6}$	6 mA		0.57	0.63	ns
	$T_{OLVCMOS18\_F8}$	8 mA		0.55	0.61	ns
	$T_{OLVCMOS18\_F12}$	12 mA		0.34	0.38	ns
	$T_{OLVCMOS18\_F16}$	16 mA		0.12	0.13	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 622 of 947

Table 30: **IOB Output Switching Characteristics Standard Adjustments *(Continued)***

Output Delay Adjustments			Speed Grade			
Description	**Symbol**	**Standard**	**-7**	**-6**	**-5**	**Units**
Standard-specific adjustments for output delays terminating at pads (based on standard capacitive load, Csl) *(continued)*	$T_{OLVCMOS15\_S2}$	LVCMOS15, Slow, 2 mA		7.12	7.83	ns
	$T_{OLVCMOS15\_S4}$	4 mA		4.93	5.42	ns
	$T_{OLVCMOS15\_S6}$	6 mA		3.24	3.56	ns
	$T_{OLVCMOS15\_S8}$	8 mA		2.93	3.23	ns
	$T_{OLVCMOS15\_S12}$	12 mA		1.51	1.66	ns
	$T_{OLVCMOS15\_S16}$	16 mA		1.47	1.62	ns
	$T_{OLVCMOS15\_F2}$	LVCMOS15, Fast, 2 mA		2.60	2.86	ns
	$T_{OLVCMOS15\_F4}$	4 mA		1.90	2.09	ns
	$T_{OLVCMOS15\_F6}$	6 mA		0.75	0.82	ns
	$T_{OLVCMOS15\_F8}$	8 mA		1.08	1.19	ns
	$T_{OLVCMOS15\_F12}$	12 mA		0.29	0.32	ns
	$T_{OLVCMOS15\_F16}$	16 mA		0.32	0.35	ns
	$T_{OLVDCI33}$	LVDCI_33		0.83	0.91	ns
	$T_{OLVDCI25}$	LVDCI_25		0.64	0.71	ns
	$T_{OLVDCI18}$	LVDCI_18		0.75	0.82	ns
	$T_{OLVDCI15}$	LVDCI_15		1.15	1.26	ns
	$T_{OLVDCI\_DV2\_25}$	LVDCI_DV2_25		0.07	0.08	ns
	$T_{OLVDCI\_DV2\_18}$	LVDCI_DV2_18		0.34	0.38	ns
	$T_{OLVDCI\_DV2\_15}$	LVDCI_DV2_15		0.69	0.76	ns
	T_{OGTL_DCI}	GTL_DCI		1.39	1.53	ns
	T_{OGTLP_DCI}	GTLP_DCI		2.71	2.98	ns
	$T_{OHSTL\_I\_DCI}$	HSTL_I_DCI		0.63	0.69	ns
	$T_{OHSTL\_II\_DCI}$	HSTL_II_DCI		0.54	0.60	ns
	$T_{OHSTL\_III\_DCI}$	HSTL_III_DCI		0.36	0.40	ns
	$T_{OHSTL\_IV\_DCI}$	HSTL_IV_DCI		2.08	2.29	ns
	$T_{OHSTL\_I\_DCI\_18}$	HSTL_I_DCI_18		0.63	0.70	ns
	$T_{OHSTL\_II\_DCI\_18}$	HSTL_II_DCI_18		0.28	0.31	ns
	$T_{OHSTL\_III\_DCI\_18}$	HSTL_III_DCI_18		0.40	0.44	ns
	$T_{OHSTL\_IV\_DCI\_18}$	HSTL_IV_DCI_18		1.70	1.87	ns
	$T_{OSSTL2\_I\_DCI}$	SSTL2_I_DCI		0.56	0.61	ns
	$T_{OSSTL2\_II\_DCI}$	SSTL2_II_DCI		0.56	0.61	ns
	$T_{OLVPECL\_25}$	LVPECL_25		0.19	0.21	ns
	$T_{OSSTL18\_I}$	SSTL18_I		0.92	1.01	ns
	$T_{OSSTL18\_II}$	SSTL18_II		0.51	0.56	ns
	$T_{OSSTL18\_I\_DCI}$	SSTL18_I_DCI		0.62	0.68	ns
	$T_{OSSTL18\_II\_DCI}$	SSTL18_II_DCI		0.28	0.31	ns

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 623/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 623 of 947

Table 31: **Delay Measurement Methodology**

Standard	V_L (1)	V_H (1)	Meas. Point	V_{REF} (Typ) (2)
LVTTL	0	3.3	1.65	–
LVCMOS33	0	3.3	1.65	–
LVCMOS25	0	2.5	1.25	–
LVCMOS18	0	1.8	0.9	–
LVCMOS15	0	1.5	0.75	–
PCI33_3	Per PCI Specification			–
PCI66_3	Per PCI Specification			–
PCI-X	Per PCI-X Specification			–
GTL	V_{REF} – 0.2	V_{REF} + 0.2	V_{REF}	0.80
GTLP	V_{REF} – 0.2	V_{REF} + 0.2	V_{REF}	1.0
HSTL Class I	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.75
HSTL Class II	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.75
HSTL Class III	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL Class IV	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL Class I (1.8V)	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL Class II (1.8V)	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL Class III (1.8V)	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	1.08
HSTL Class IV (1.8V)	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	1.08
SSTL2 I & II	V_{REF} – 0.75	V_{REF} + 0.75	V_{REF}	1.25
SSTL18 I & II	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.9
LVDS_25	1.2 – 0.125	1.2 + 0.125	1.2	
LVDSEXT_25	1.2 – 0.125	1.2 + 0.125	1.2	
ULVDS_25	0.6 – 0.125	0.6 + 0.125	0.6	
LDT_25	0.6 – 0.125	0.6 + 0.125	0.6	

Notes:
1. Input waveform switches between V_L and V_H.
2. Measurements are made at V_{REF} (Typ), Maximum, and Minimum. Worst-case values are reported.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 624 of 947

I/O Standard Adjustment Measurement Methodology

I/O standard adjustments are measured using a Tektronix P6245 TDS500/600 probe (< 1 pf) across approximately 4" of FR4 microstrip transmission line. The propogation delay for the 4" of FR4 is characterized separately and subtracted from the final measurement.

I/O standard adjustment measurements are reflected in the IBIS model except where the IBIS format precludes it. The use of IBIS models results in a more accurate prediction of the propagation delay. The following method may be used to measure propogation delay:

1. Model the output in an IBIS simulation using the Generalized Test Setup shown in Figure 6.
2. Record the relative time to the V_{OH} or V_{OL} transition of interest. This is the baseline simulation.
3. Model the actual PCB traces (transmission lines) and actual loads from the appropriate IBIS models for the driven devices.
4. Record the results from the new simulation
5. Compare with the baseline simulation. The increase or decrease in delay from the baseline simulation should be added or subtracted to the I/O Output Standard Adjustment value to predict the actual propogation delay.

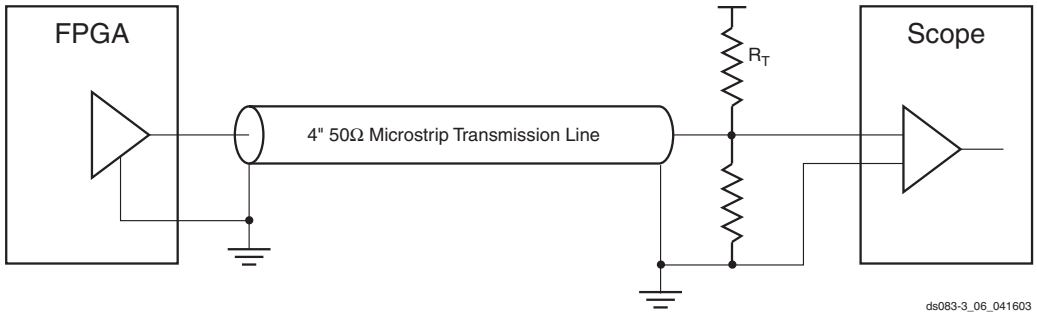


Figure 6: **Generalized Test Setup**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 625/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 625 of 947

CLB Switching Characteristics

Delays originating at F/G inputs vary slightly according to the input used (see Figure 25 in Module 2). The values listed below are worst-case. Precise values are provided by the timing analyzer.

Table 32: **CLB Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Combinatorial Delays					
4-input function: F/G inputs to X/Y outputs	T_{ILO}	0.28	0.32	0.36	ns, max
5-input function: F/G inputs to F5 output	T_{IF5}	0.59	0.65	0.73	ns, max
5-input function: F/G inputs to X output	T_{IF5X}	0.63	0.70	0.79	ns, max
FXINA or FXINB inputs to Y output via MUXFX	T_{IFXY}	0.29	0.32	0.36	ns, max
FXINA input to FX output via MUXFX	T_{INAFX}	0.29	0.32	0.36	ns, max
FXINB input to FX output via MUXFX	T_{INBFX}	0.29	0.32	0.36	ns, max
SOPIN input to SOPOUT output via ORCY	T_{SOPSOP}	0.11	0.13	0.14	ns, max
Incremental delay routing through transparent latch to XQ/YQ outputs	T_{IFNCTL}	0.23	0.24	0.27	ns, max
Sequential Delays					
FF Clock CLK to XQ/YQ outputs	T_{CKO}	0.37	0.38	0.42	ns, max
Latch Clock CLK to XQ/YQ outputs	T_{CKLO}	0.54	0.57	0.64	ns, max
Setup and Hold Times Before/After Clock CLK					
BX/BY inputs	T_{DICK}/T_{CKDI}	0.21/–0.04	0.24/–0.05	0.27/–0.06	ns, min
DY inputs	T_{DYCK}/T_{CKDY}	0.00/ 0.12	0.00/ 0.14	0.00/ 0.15	ns, min
DX inputs	T_{DXCK}/T_{CKDX}	0.00/ 0.12	0.00/ 0.14	0.00/ 0.15	ns, min
CE input	T_{CECK}/T_{CKCE}	0.37/ 0.01	0.42/ 0.01	0.47/ 0.01	ns, min
SR/BY inputs (synchronous)	T_{RCK}/T_{CKR}	0.63/–0.01	0.70/–0.01	0.78/–0.01	ns, min
Clock CLK					
Minimum Pulse Width, High	T_{CH}	0.37	0.40	0.45	ns, min
Minimum Pulse Width, Low	T_{CL}	0.37	0.40	0.45	ns, min
Set/Reset					
Minimum Pulse Width, SR/BY inputs	T_{RPW}	0.37	0.40	0.45	ns, min
Delay from SR/BY inputs to XQ/YQ outputs (asynchronous)	T_{RQ}	1.09	1.25	1.40	ns, max
Toggle Frequency (MHz) (for export control)	F_{TOG}	1350	1200	1050	MHz

Notes:
1. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 626 of 947

CLB Distributed RAM Switching Characteristics

Table 33: **CLB Distributed RAM Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Sequential Delays					
Clock CLK to X/Y outputs (WE active) in 16 x 1 mode	$T_{SHCKO16}$	1.25	1.38	1.54	ns, max
Clock CLK to X/Y outputs (WE active) in 32 x 1 mode	$T_{SHCKO32}$	1.57	1.75	1.95	ns, max
Clock CLK to F5 output	$T_{SHCKOF5}$	1.52	1.68	1.88	ns, max
Setup and Hold Times Before/After Clock CLK					
BX/BY data inputs (DIN)	T_{DS}/T_{DH}	0.38/–0.07	0.41/–0.07	0.46/–0.08	ns, min
F/G address inputs	T_{AS}/T_{AH}	0.42/ 0.00	0.47/ 0.00	0.52/ 0.00	ns, min
SR input	T_{WES}/T_{WEH}	0.22/ 0.04	0.24/ 0.05	0.26/ 0.05	ns, min
Clock CLK					
Minimum Pulse Width, High	T_{WPH}	0.63	0.72	0.79	ns, min
Minimum Pulse Width, Low	T_{WPL}	0.63	0.72	0.79	ns, min
Minimum clock period to meet address write cycle time	T_{WC}	1.25	1.44	1.58	ns, min

Notes:
1. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values cannot be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.

CLB Shift Register Switching Characteristics

Table 34: **CLB Shift Register Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Sequential Delays					
Clock CLK to X/Y outputs	T_{REG}	2.78	3.12	3.49	ns, max
Clock CLK to X/Y outputs	T_{REG32}	3.10	3.49	3.90	ns, max
Clock CLK to XB output via MC15 LUT output	T_{REGXB}	2.84	3.18	3.55	ns, max
Clock CLK to YB output via MC15 LUT output	T_{REGYB}	2.55	2.88	3.21	ns, max
Clock CLK to Shiftout	T_{CKSH}	2.50	2.83	3.15	ns, max
Clock CLK to F5 output	T_{REGF5}	3.05	3.42	3.83	ns, max
Setup and Hold Times Before/After Clock CLK					
BX/BY data inputs (DIN)	T_{SRLDS}/T_{SRLDH}	0.78/–0.16	0.87/–0.18	0.98/–0.21	ns, min
SR input	T_{WSS}/T_{WSH}	0.37/ 0.01	0.42/ 0.01	0.47/ 0.01	ns, min
Clock CLK					
Minimum Pulse Width, High	T_{SRPH}	0.63	0.72	0.79	ns, min
Minimum Pulse Width, Low	T_{SRPL}	0.63	0.72	0.79	ns, min

Notes:
1. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values cannot be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 627/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 627 of 947

Multiplier Switching Characteristics

Table 35: **Multiplier Switching Characteristics**

		Speed Grade			
Description	**Symbol**	**-7**	**-6**	**-5**	**Units**
Propagation Delay to Output Pin					
Input to Pin35	T_{MULT_P35}	4.08	4.64	5.19	ns, max
Input to Pin34	T_{MULT_P34}	3.99	4.55	5.09	ns, max
Input to Pin33	T_{MULT_P33}	3.90	4.45	4.99	ns, max
Input to Pin32	T_{MULT_P32}	3.80	4.36	4.88	ns, max
Input to Pin31	T_{MULT_P31}	3.71	4.27	4.78	ns, max
Input to Pin30	T_{MULT_P30}	3.62	4.17	4.67	ns, max
Input to Pin29	T_{MULT_P29}	3.53	4.08	4.57	ns, max
Input to Pin28	T_{MULT_P28}	3.43	3.99	4.46	ns, max
Input to Pin27	T_{MULT_P27}	3.34	3.89	4.36	ns, max
Input to Pin26	T_{MULT_P26}	3.25	3.80	4.26	ns, max
Input to Pin25	T_{MULT_P25}	3.16	3.71	4.15	ns, max
Input to Pin24	T_{MULT_P24}	3.06	3.61	4.05	ns, max
Input to Pin23	T_{MULT_P23}	2.97	3.52	3.94	ns, max
Input to Pin22	T_{MULT_P22}	2.88	3.43	3.84	ns, max
Input to Pin21	T_{MULT_P21}	2.79	3.34	3.73	ns, max
Input to Pin20	T_{MULT_P20}	2.70	3.24	3.63	ns, max
Input to Pin19	T_{MULT_P19}	2.60	3.15	3.53	ns, max
Input to Pin18	T_{MULT_P18}	2.51	3.06	3.42	ns, max
Input to Pin17	T_{MULT_P17}	2.42	2.96	3.32	ns, max
Input to Pin16	T_{MULT_P16}	2.34	2.86	3.21	ns, max
Input to Pin15	T_{MULT_P15}	2.27	2.76	3.09	ns, max
Input to Pin14	T_{MULT_P14}	2.19	2.67	2.98	ns, max
Input to Pin13	T_{MULT_P13}	2.12	2.57	2.87	ns, max
Input to Pin12	T_{MULT_P12}	2.04	2.47	2.76	ns, max
Input to Pin11	T_{MULT_P11}	1.96	2.37	2.65	ns, max
Input to Pin10	T_{MULT_P10}	1.89	2.27	2.54	ns, max
Input to Pin9	T_{MULT_P9}	1.81	2.17	2.43	ns, max
Input to Pin8	T_{MULT_P8}	1.74	2.07	2.32	ns, max
Input to Pin7	T_{MULT_P7}	1.66	1.97	2.21	ns, max
Input to Pin6	T_{MULT_P6}	1.59	1.87	2.09	ns, max
Input to Pin5	T_{MULT_P5}	1.51	1.77	1.98	ns, max
Input to Pin4	T_{MULT_P4}	1.44	1.67	1.87	ns, max
Input to Pin3	T_{MULT_P3}	1.36	1.57	1.76	ns, max
Input to Pin2	T_{MULT_P2}	1.28	1.47	1.65	ns, max
Input to Pin1	T_{MULT_P1}	1.21	1.37	1.54	ns, max
Input to Pin0	T_{MULT_P0}	1.13	1.27	1.43	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 628 of 947

Table 36: **Pipelined Multiplier Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Setup and Hold Times Before/After Clock					
Data Inputs	$T_{MULIDCK}/T_{MULCKID}$	1.86/ 0.00	2.06/ 0.00	2.31/ 0.00	ns, max
Clock Enable	$T_{MULIDCK\_CE}/T_{MULCKID\_CE}$	0.23/ 0.00	0.25/ 0.00	0.28/ 0.00	ns, max
Reset	$T_{MULIDCK\_RST}/T_{MULCKID\_RST}$	0.21/–0.09	0.24/–0.09	0.26/–0.10	ns, max
Clock to Output Pin					
Clock to Pin35	T_{MULTCK_P35}	2.45	2.92	3.27	ns, max
Clock to Pin34	T_{MULTCK_P34}	2.36	2.82	3.16	ns, max
Clock to Pin33	T_{MULTCK_P33}	2.28	2.72	3.05	ns, max
Clock to Pin32	T_{MULTCK_P32}	2.20	2.62	2.93	ns, max
Clock to Pin31	T_{MULTCK_P31}	2.12	2.52	2.82	ns, max
Clock to Pin30	T_{MULTCK_P30}	2.03	2.42	2.71	ns, max
Clock to Pin29	T_{MULTCK_P29}	1.95	2.32	2.60	ns, max
Clock to Pin28	T_{MULTCK_P28}	1.87	2.22	2.48	ns, max
Clock to Pin27	T_{MULTCK_P27}	1.79	2.12	2.37	ns, max
Clock to Pin26	T_{MULTCK_P26}	1.70	2.02	2.26	ns, max
Clock to Pin25	T_{MULTCK_P25}	1.62	1.92	2.15	ns, max
Clock to Pin24	T_{MULTCK_P24}	1.54	1.82	2.03	ns, max
Clock to Pin23	T_{MULTCK_P23}	1.46	1.71	1.92	ns, max
Clock to Pin22	T_{MULTCK_P22}	1.37	1.61	1.81	ns, max
Clock to Pin21	T_{MULTCK_P21}	1.29	1.51	1.69	ns, max
Clock to Pin20	T_{MULTCK_P20}	1.21	1.41	1.58	ns, max
Clock to Pin19	T_{MULTCK_P19}	1.13	1.31	1.47	ns, max
Clock to Pin18	T_{MULTCK_P18}	1.04	1.21	1.36	ns, max
Clock to Pin17	T_{MULTCK_P17}	0.96	1.11	1.24	ns, max
Clock to Pin16	T_{MULTCK_P16}	0.88	1.01	1.13	ns, max
Clock to Pin15	T_{MULTCK_P15}	0.80	0.91	1.02	ns, max
Clock to Pin14	T_{MULTCK_P14}	0.71	0.81	0.91	ns, max
Clock to Pin13	T_{MULTCK_P13}	0.63	0.71	0.79	ns, max
Clock to Pin12	T_{MULTCK_P12}	0.63	0.71	0.79	ns, max
Clock to Pin11	T_{MULTCK_P11}	0.63	0.71	0.79	ns, max
Clock to Pin10	T_{MULTCK_P10}	0.63	0.71	0.79	ns, max
Clock to Pin9	T_{MULTCK_P9}	0.63	0.71	0.79	ns, max
Clock to Pin8	T_{MULTCK_P8}	0.63	0.71	0.79	ns, max
Clock to Pin7	T_{MULTCK_P7}	0.63	0.71	0.79	ns, max
Clock to Pin6	T_{MULTCK_P6}	0.63	0.71	0.79	ns, max
Clock to Pin5	T_{MULTCK_P5}	0.63	0.71	0.79	ns, max
Clock to Pin4	T_{MULTCK_P4}	0.63	0.71	0.79	ns, max
Clock to Pin3	T_{MULTCK_P3}	0.63	0.71	0.79	ns, max
Clock to Pin2	T_{MULTCK_P2}	0.63	0.71	0.79	ns, max
Clock to Pin1	T_{MULTCK_P1}	0.63	0.71	0.79	ns, max
Clock to Pin0	T_{MULTCK_P0}	0.63	0.71	0.79	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 629 of 947

Block SelectRAM+ Switching Characteristics

Table 37: **Block SelectRAM+ Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Sequential Delays					
Clock CLK to DOUT output	T_{BCKO}	1.41	1.50	1.68	ns, max
Setup and Hold Times Before Clock CLK					
ADDR inputs	T_{BACK}/T_{BCKA}	0.27/ 0.22	0.31/ 0.25	0.35/ 0.28	ns, min
DIN inputs	T_{BDCK}/T_{BCKD}	0.20/ 0.22	0.23/ 0.25	0.26/ 0.28	ns, min
EN input	T_{BECK}/T_{BCKE}	0.28/ 0.00	0.32/ 0.00	0.35/ 0.00	ns, min
RST input	T_{BRCK}/T_{BCKR}	0.28/ 0.00	0.32/ 0.00	0.35/ 0.00	ns, min
WEN input	T_{BWCK}/T_{BCKW}	0.33/ 0.00	0.35/ 0.00	0.39/ 0.00	ns, min
Clock CLK					
Minimum Pulse Width, High	T_{BPWH}	1.17	1.30	1.50	ns, min
Minimum Pulse Width, Low	T_{BPWL}	1.17	1.30	1.50	ns, min

Notes:
1. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.

TBUF Switching Characteristics

Table 38: **TBUF Switching Characteristics**

Description	Symbol	Speed Grade			Units
		-7	-6	-5	
Combinatorial Delays					
IN input to OUT output	T_{IO}	0.88	1.01	1.12	ns, max
TRI input to OUT output high-impedance	T_{OFF}	0.48	0.55	0.61	ns, max
TRI input to valid data on OUT output	T_{ON}	0.48	0.55	0.61	ns, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 630 of 947

Configuration Timing

Configuration Memory Clearing Parameters

Power-up timing of configuration signals is shown in Figure 7; corresponding timing characteristics are listed in Table 39.

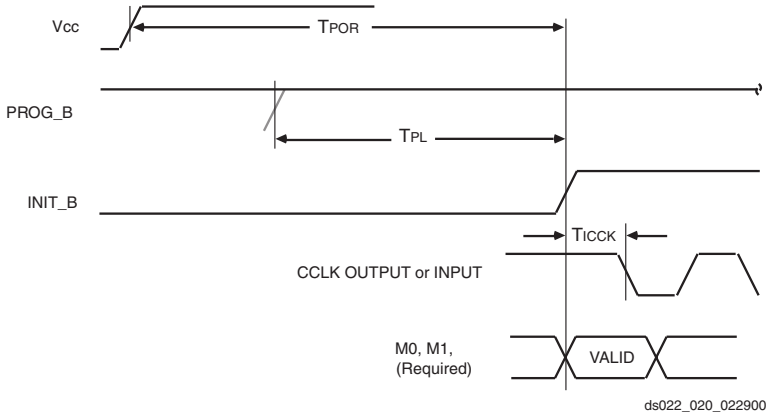


Figure 7: **Power-Up Timing Configuration Signals**

Table 39: **Power-Up Timing Characteristics**

Description	Symbol	Value	Units
Program Latency	T_{PL}	4	µs per frame, max
Power-on-Reset	T_{POR}	T_{PL} + 2	ms, max
CCLK (output) Delay	T_{ICCK}		µs, min
			µs, max
Program Pulse Width	$T_{PROGRAM}$	300	ns, min

Notes:
1.

Master/Slave Serial Mode Parameters

For Slave configurations, a free running CCLK can be used, as shown in Figure 8.

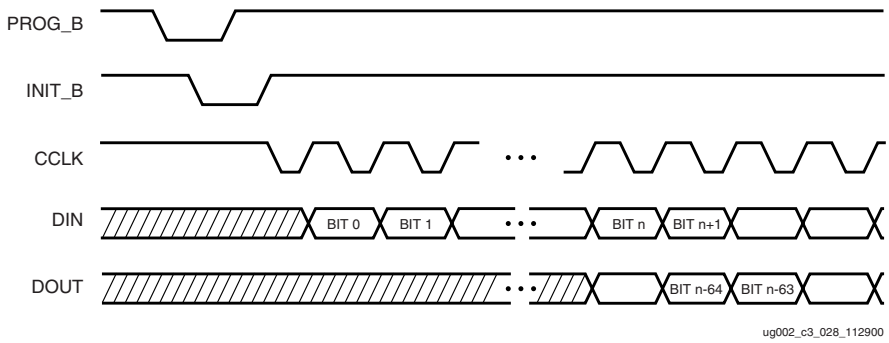


Figure 8: **Serial Configuration Clocking Sequence**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 631/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 631 of 947

Table 40: **Master/Slave Serial Mode Programming Switching**

	Description	Symbol	Values	Units
CCLK	DIN setup/hold, slave mode	T_{DCC}/T_{CCD}	5.0/0.0	ns, min
	DIN setup/hold, master mode	T_{DSCK}/T_{SCKD}	5.0/0.0	ns, min
	DOUT	T_{CCO}	12.0	ns, max
	High time	T_{CCH}	5.0	ns, min
	Low time	T_{CCL}	5.0	ns, min
	Maximum Frequency	F_{CC_SERIAL}	66	MHz, max
	Frequency Tolerance, master mode with respect to nominal		+45% -30%	

Master/Slave SelectMAP Parameters

Figure 9 is a generic diagram for data loading using SelectMAP. For other data loading diagrams, refer to the *Virtex-II Pro Platform FPGA User Guide*.

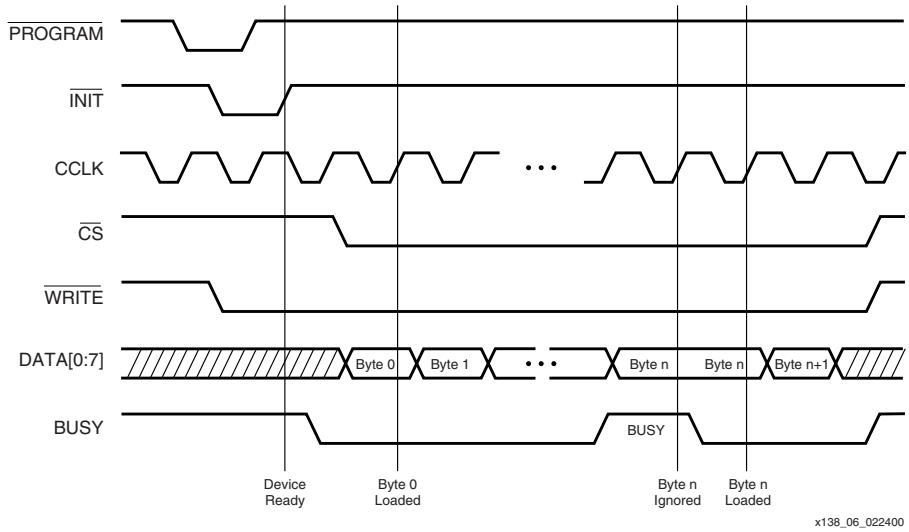


Figure 9: **Data Loading in SelectMAP**

Table 41: **SelectMAP Write Timing Characteristics**

	Description	Symbol	Value	Units
CCLK	D_{0-7} Setup/Hold	T_{SMDCC}/T_{SMCCD}	5.0/0.0	ns, min
	CS_B Setup/Hold	T_{SMCSCC}/T_{SMCCCS}	7.0/0.0	ns, min
	RDWR_B Setup/Hold	T_{SMCCW}/T_{SMWCC}	7.0/0.0	ns, min
	BUSY Propagation Delay	T_{SMCKBY}	12.0	ns, max
	Maximum Frequency	$F_{CC_}$SelectMAP	50	MHz, max
	Maximum Frequency with No Handshake	F_{CCNH}	50	MHz, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 632 of 947

JTAG Test Access Port Switching Characteristics

Characterization data for some of the most commonly requested timing parameters shown in Figure 10 is listed in Table 42.

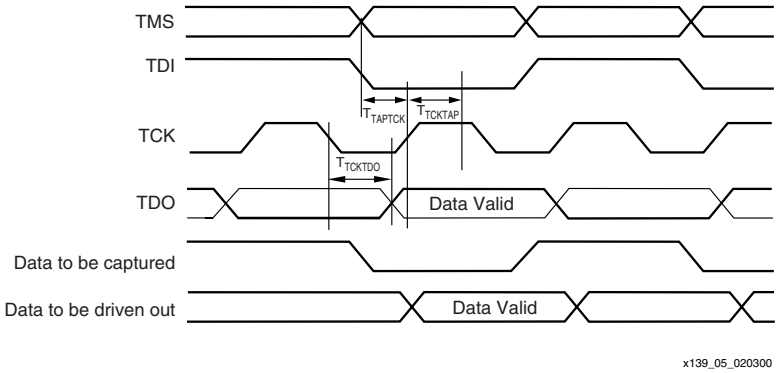


Figure 10: **Virtex-II Pro Boundary Scan Port Timing Waveforms**

Table 42: **Boundary-Scan Port Timing Specifications**

Symbol	Parameter	Value	Units
T_{TAPTCK}	TMS and TDI setup time before TCK	5.5	ns, min
T_{TCKTAP}	TMS and TDI hold times after TCK	2.0	ns, min
T_{TCKTDO}	TCK falling edge to TDO output valid	11.0	ns, min
F_{TCK}	Maximum TCK clock frequency	33.0	MHz, max

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 633/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 633 of 947

Virtex-II Pro Pin-to-Pin Output Parameter Guidelines

All devices are 100% functionally tested. Listed below are representative values for typical pin locations and normal clock loading. Values are expressed in nanoseconds unless otherwise noted.

Global Clock Input to Output Delay for LVCMOS25, 12 mA, Fast Slew Rate, *With* DCM

Table 43: **Global Clock Input to Output Delay for LVCMOS25, 12 mA, Fast Slew Rate, *With* DCM**

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
LVCMOS25 Global Clock Input to Output Delay using Output Flip-flop, 12 mA, Fast Slew Rate, *with* DCM. For data *output* with different standards, adjust the delays with the values shown in **IOB Output Switching Characteristics Standard Adjustments**, page 25.						
Global Clock and OFF with DCM	$T_{ICKOFDCM}$	XC2VP2				ns
		XC2VP4				ns
		XC2VP7		2.40	2.50	ns
		XC2VP20		2.40	2.50	ns
		XC2VP30				ns
		XC2VP40				ns
		XC2VP50				ns
		XC2VP70				ns
		XC2VP100				ns
		XC2VP125				ns

Notes:
1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. Output timing is measured at 50% V_{CC} threshold with 35 pF external capacitive load. For other I/O standards and different loads, see Table 31.
3. DCM output jitter is already included in the timing calculation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 634 of 947

Global Clock Input to Output Delay for LVCMOS25, 12 mA, Fast Slew Rate, *Without* DCM

Table 44: **Global Clock Input to Output Delay for LVCMOS25, 12 mA, Fast Slew Rate, *Without* DCM**

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
LVCMOS25 Global Clock Input to Output Delay using Output Flip-flop, 12 mA, Fast Slew Rate, *without* DCM. For data *output* with different standards, adjust the delays with the values shown in **IOB Output Switching Characteristics Standard Adjustments**, page 25.						
Global Clock and OFF without DCM	T_{ICKOF}	XC2VP2				ns
		XC2VP4				ns
		XC2VP7		4.80	5.26	ns
		XC2VP20		4.90	5.31	ns
		XC2VP30				ns
		XC2VP40				ns
		XC2VP50				ns
		XC2VP70				ns
		XC2VP100				ns
		XC2VP125				ns

Notes:
1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. Output timing is measured at 50% V_{CC} threshold with 35 pF external capacitive load. For other I/O standards and different loads, see Table 31.
3. DCM output jitter is already included in the timing calculation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 635 of 947

Virtex-II Pro Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. Listed below are representative values for typical pin locations and normal clock loading. Values are expressed in nanoseconds unless otherwise noted

Global Clock Set-Up and Hold for LVCMOS25 Standard, *With* DCM

Table 45: **Global Clock Set-Up and Hold for LVCMOS25 Standard, *With* DCM**

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
Input Setup and Hold Time Relative to Global Clock Input Signal for LVCMOS25 Standard. For data input with different standards, adjust the setup time delay by the values shown in **IOB Input Switching Characteristics Standard Adjustments**, page 22.						
No Delay Global Clock and IFF with DCM	T_{PSDCM}/T_{PHDCM}	XC2VP2				ns
		XC2VP4				ns
		XC2VP7				ns
		XC2VP20				ns
		XC2VP30				ns
		XC2VP40				ns
		XC2VP50				ns
		XC2VP70				ns
		XC2VP100				ns
		XC2VP125				ns

Notes:
1. IFF = Input Flip-Flop or Latch
2. Setup time is measured relative to the Global Clock input signal with the fastest route and the lightest load. Hold time is measured relative to the Global Clock input signal with the slowest route and heaviest load.
3. DCM output jitter is already included in the timing calculation.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 636 of 947

Global Clock Set-Up and Hold for LVCMOS25 Standard, *Without* DCM

Table 46: **Global Clock Set-Up and Hold for LVCMOS25 Standard, *Without* DCM**

			Speed Grade			
Description	**Symbol**	**Device**	**-7**	**-6**	**-5**	**Units**
Input Setup and Hold Time Relative to Global Clock Input Signal for LVCMOS25 Standard. For data input with different standards, adjust the setup time delay by the values shown in **IOB Input Switching Characteristics Standard Adjustments**, page 22.						
Full Delay Global Clock and IFF without DCM	T_{PSFD}/T_{PHFD}	XC2VP2				ns
		XC2VP4				ns
		XC2VP7		1.92/ 0.00	1.92/ 0.00	ns
		XC2VP20		1.92/ 0.00	1.92/ 0.00	ns
		XC2VP30				ns
		XC2VP40				ns
		XC2VP50				ns
		XC2VP70				ns
		XC2VP100				ns
		XC2VP125				ns

Notes:
1. IFF = Input Flip-Flop or Latch
2. Setup time is measured relative to the Global Clock input signal with the fastest route and the lightest load. Hold time is measured relative to the Global Clock input signal with the slowest route and heaviest load.
3. A Zero “0” Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed “best-case”, but if a “0” is listed, there is no positive hold time.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 637/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 637 of 947

DCM Timing Parameters

All devices are 100% functionally tested. Because of the difficulty in directly measuring many internal timing parameters, those parameters are derived from benchmark timing patterns. The following guidelines reflect worst-case values across the recommended operating conditions. All output jitter and phase specifications are determined through statistical measurement at the package pins.

Operating Frequency Ranges

Table 47: **Operating Frequency Ranges**

			Speed Grade			
Description	**Symbol**	**Constraints**	**-7**	**-6**	**-5**	**Units**
Output Clocks (Low Frequency Mode)						
CLK0, CLK90, CLK180, CLK270	CLKOUT_FREQ_1X_LF_MIN			24.00	24.00	MHz
CLK2X, CLK2X180	CLKOUT_FREQ_2X_LF_MIN			48.00	48.00	MHz
CLKDV	CLKOUT_FREQ_DV_LF_MIN			1.50	1.50	MHz
CLKFX, CLKFX180	CLKOUT_FREQ_FX_LF_MIN			24.00	24.00	MHz
	CLKOUT_FREQ_FX_LF_MAX			240.00	210.00	MHz
Input Clocks (Low Frequency Mode)						
CLKIN (using DLL outputs)(1)	CLKIN_FREQ_DLL_LF_MIN			24.00	24.00	MHz
CLKIN (using CLKFX outputs)(2)	CLKIN_FREQ_FX_LF_MIN			1.00	1.00	MHz
	CLKIN_FREQ_FX_LF_MAX			240.00	210.00	MHz
PSCLK	PSCLK_FREQ_LF_MIN			0.01	0.01	MHz
	PSCLK_FREQ_LF_MAX			420.00	360.00	MHz
Output Clocks (High Frequency Mode)						
CLK0, CLK180	CLKOUT_FREQ_1X_HF_MIN			48.00	48.00	MHz
CLKDV	CLKOUT_FREQ_DV_HF_MIN			3.00	3.00	MHz
CLKFX, CLKFX180	CLKOUT_FREQ_FX_HF_MIN			210.00	210.00	MHz
	CLKOUT_FREQ_FX_HF_MAX			320.00	270.00	MHz
Input Clocks (High Frequency Mode)						
CLKIN (using DLL outputs)(1)	CLKIN_FREQ_DLL_HF_MIN			48.00	48.00	MHz
CLKIN (using CLKFX outputs)(2)	CLKIN_FREQ_FX_HF_MIN			50.00	50.00	MHz
	CLKIN_FREQ_FX_HF_MAX			320.00	270.00	MHz
PSCLK	PSCLK_FREQ_HF_MIN			0.01	0.01	MHz
	PSCLK_FREQ_HF_MAX			420.00	360.00	MHz

Notes:
1. "DLL outputs" is used here to describe the outputs: CLK0, CLK90, CLK180, CLK270, CLK2X, CLK2X180, and CLKDV.
2. If both DLL and CLKFX outputs are used, follow the more restrictive specification.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 638 of 947

Input Clock Tolerances

Table 48: **Input Clock Tolerances**

Description	Symbol	Constraints F_{CLKIN}	Speed Grade						Units
			–7		–6		–5		
			Min	Max	Min	Max	Min	Max	
Input Clock Low/High Pulse Width									
PSCLK	PSCLK_PULSE	< 1MHz			25.00		25.00		ns
PSCLK and CLKIN(2)	PSCLK_PULSE and CLKIN_PULSE	1 – 10 MHz			25.00		25.00		ns
		10 – 25 MHz			10.00		10.00		ns
		25 – 50 MHz			5.00		5.00		ns
		50 – 100 MHz			3.00		3.00		ns
		100 – 150 MHz			2.40		2.40		ns
		150 – 200 MHz			2.00		2.00		ns
		200 – 250 MHz			1.80		1.80		ns
		250 – 300 MHz			1.50		1.50		ns
		300 – 350 MHz			1.30		1.30		ns
		350 – 400 MHz			1.15		1.15		ns
		> 400 MHz			1.05		1.05		ns
Input Clock Cycle-Cycle Jitter (Low Frequency Mode)									
CLKIN (using DLL outputs)(1)	CLKIN_CYC_JITT_DLL_LF					±300		±300	ps
CLKIN (using CLKFX outputs)(2)	CLKIN_CYC_JITT_FX_LF					±300		±300	ps
Input Clock Cycle-Cycle Jitter (High Frequency Mode)									
CLKIN (using DLL outputs)(1)	CLKIN_CYC_JITT_DLL_HF					±150		±150	ps
CLKIN (using CLKFX outputs)(2)	CLKIN_CYC_JITT_FX_HF					±150		±150	ps
Input Clock Period Jitter (Low Frequency Mode)									
CLKIN (using DLL outputs)(1)	CLKIN_PER_JITT_DLL_LF					±1		±1	ns
CLKIN (using CLKFX outputs)(2)	CLKIN_PER_JITT_FX_LF					±1		±1	ns
Input Clock Period Jitter (High Frequency Mode)									
CLKIN (using DLL outputs)(1)	CLKIN_PER_JITT_DLL_HF					±1		±1	ns
CLKIN (using CLKFX outputs)(2)	CLKIN_PER_JITT_FX_HF					±1		±1	ns
Feedback Clock Path Delay Variation									
CLKFB off-chip feedback	CLKFB_DELAY_VAR_EXT					±1		±1	ns

Notes:
1. “”DLL outputs” is used here to describe the outputs: CLK0, CLK90, CLK180, CLK270, CLK2X, CLK2X180, and CLKDV.
2. If both DLL and CLKFX outputs are used, follow the more restrictive specification.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 639 of 947

Output Clock Jitter

Table 49: **Output Clock Jitter**

Description	Symbol	Constraints	Speed Grade			Units
			–7	–6	–5	
Clock Synthesis Period Jitter						
CLK0	CLKOUT_PER_JITT_0			±100	±100	ps
CLK90	CLKOUT_PER_JITT_90			±150	±150	ps
CLK180	CLKOUT_PER_JITT_180			±150	±150	ps
CLK270	CLKOUT_PER_JITT_270			±150	±150	ps
CLK2X, CLK2X180	CLKOUT_PER_JITT_2X			±200	±200	ps
CLKDV (integer division)	CLKOUT_PER_JITT_DV1			±150	±150	ps
CLKDV (non-integer division)	CLKOUT_PER_JITT_DV2			±300	±300	ps
CLKFX, CLKFX180	CLKOUT_PER_JITT_FX			Note (1)	Note (1)	ps

Notes:
1. Use the **Jitter Calculator** on the Xilinx website (**http://www.xilinx.com/applications/web_ds_v2/jitter_calc.htm**) for CLKFX and CLKFX180 output jitter.

Output Clock Phase Alignment

Table 50: **Output Clock Phase Alignment**

Description	Symbol	Constraints	Speed Grade			Units
			–7	–6	–5	
Phase Offset Between CLKIN and CLKFB						
CLKIN/CLKFB	CLKIN_CLKFB_PHASE			±50	±50	ps
Phase Offset Between Any DCM Outputs						
All CLK* outputs	CLKOUT_PHASE			±140	±140	ps
Duty Cycle Precision						
DLL outputs(1)	CLKOUT_DUTY_CYCLE_DLL(2)			±150	±150	ps
CLKFX outputs	CLKOUT_DUTY_CYCLE_FX			±100	±100	ps

Notes:
1. “”DLL outputs” is used here to describe the outputs: CLK0, CLK90, CLK180, CLK270, CLK2X, CLK2X180, and CLKDV.
2. CLKOUT_DUTY_CYCLE_DLL applies to the 1X clock outputs (CLK0, CLK90, CLK180, and CLK270) only if DUTY_CYCLE_CORRECTION = TRUE.
3. Specification also applies to PSCLK.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 640 of 947

Miscellaneous Timing Parameters

Table 51: **Miscellaneous Timing Parameters**

			Speed Grade			
Description	**Symbol**	**Constraints F_{CLKIN}**	**-7**	**-6**	**-5**	**Units**
Time Required to Achieve LOCK						
Using DLL outputs(1)	LOCK_DLL:					
	LOCK_DLL_60	> 60MHz		20.00	20.00	us
	LOCK_DLL_50_60	50 - 60 MHz		25.00	25.00	us
	LOCK_DLL_40_50	40 - 50 MHz		50.00	50.00	us
	LOCK_DLL_30_40	30 - 40 MHz		90.00	90.00	us
	LOCK_DLL_24_30	24 - 30 MHz		120.00	120.00	us
Using CLKFX outputs	LOCK_FX_MIN			10.00	10.00	ms
	LOCK_FX_MAX			10.00	10.00	ms
Additional lock time with fine phase shifting	LOCK_DLL_FINE_SHIFT			50.00	50.00	us
Fine Phase Shifting						
Absolute shifting range	FINE_SHIFT_RANGE			10.00	10.00	ns
Delay Lines						
Tap delay resolution	DCM_TAP_MIN			30.00	30.00	ps
	DCM_TAP_MAX			50.00	50.00	ps

Notes:
1. “”DLL outputs” is used here to describe the outputs: CLK0, CLK90, CLK180, CLK270, CLK2X, CLK2X180, and CLKDV.

Frequency Synthesis

Table 52: **Frequency Synthesis**

Attribute	Min	Max
CLKFX_MULTIPLY	2	32
CLKFX_DIVIDE	1	32

Parameter Cross-Reference

Table 53: **Parameter Cross-Reference**

Libraries Guide	Data Sheet
DLL_CLKOUT_{MIN|MAX}_LF	CLKOUT_FREQ_{1X|2X|DV}_LF
DFS_CLKOUT_{MIN|MAX}_LF	CLKOUT_FREQ_FX_LF
DLL_CLKIN_{MIN|MAX}_LF	CLKIN_FREQ_DLL_LF
DFS_CLKIN_{MIN|MAX}_LF	CLKIN_FREQ_FX_LF
DLL_CLKOUT_{MIN|MAX}_HF	CLKOUT_FREQ_{1X|DV}_HF
DFS_CLKOUT_{MIN|MAX}_HF	CLKOUT_FREQ_FX_HF
DLL_CLKIN_{MIN|MAX}_HF	CLKIN_FREQ_DLL_HF
DFS_CLKIN_{MIN|MAX}_HF	CLKIN_FREQ_FX_HF

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 641/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 641 of 947

Source-Synchronous Switching Characteristics

The parameters in this section provide the necessary values for calculating timing budgets for Virtex-II Pro source-synchronous transmitter and receiver data-valid windows.

Table 54: **Duty Cycle Distortion and Clock-Tree Skew**

Description	Symbol	Device	Speed Grade			Units
			–7	–6	–5	
Duty Cycle Distortion(1)	T_{DCD_CLK0}	XC2VP2				ps
		XC2VP4				ps
		XC2VP7				ps
		XC2VP20				ps
		XC2VP30				ps
		XC2VP40				ps
		XC2VP50				ps
		XC2VP70				ps
		XC2VP100				ps
		XC2VP125				ps
	T_{DCD_CLK180}	All				ps
Clock Tree Skew(2)	T_{CKSKEW}	XC2VP2				ps
		XC2VP4				ps
		XC2VP7		0.13	0.13	ps
		XC2VP20		0.21	0.22	ps
		XC2VP30				ps
		XC2VP40				ps
		XC2VP50				ps
		XC2VP70				ps
		XC2VP100				ps
		XC2VP125				ps

Notes:

1. These parameters represent the worst-case duty cycle distortion observable at the pins of the device using LVDS output buffers. For cases where other I/O standards are used, IBIS can be used to calculate any additional duty cycle distortion that might be caused by asymmetrical rise/fall times.
   T_{DCD_CLK0} applies to cases where local (IOB) inversion is used to provide the negative-edge clock to the DDR element in the I/O.
   T_{DCD_CLK180} applies to cases where the CLK180 output of the DCM is used to provide the negative-edge clock to the DDR element in the I/O.
2. This value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx FPGA_Editor and Timing Analyzer tools to evaluate clock skew specific to your application.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 642 of 947

Table 55: **Package Skew**

Description	Symbol	Device/Package	Value	Units
Package Skew(1)	$T_{PKGSKEW}$	XC2VP2FF672	104	ps
		XC2VP4FF672	102	ps
		XC2VP7FF672	92	ps
		XC2VP7FF896	101	ps
		XC2VP20FF896	93	ps
		XC2VP20FF1152	106	ps
		XC2VP30FF896		ps
		XC2VP30FF1152		ps
		XC2VP40FF1152	92	ps
		XC2VP40FF1148		ps
		XC2VP40FF1517	104	ps
		XC2VP50FF1152	88	ps
		XC2VP50FF1148	101	ps
		XC2VP50FF1517	97	ps
		XC2VP70FF1517	95	ps
		XC2VP70FF1704	101	ps
		XC2VP100FF1704		ps
		XC2VP100FF1696		ps
		XC2VP125FF1704		ps
		XC2VP125FF1696		ps

Notes:
1. These values represent the worst-case skew between any two balls of the package: shortest flight time to longest flight time from Pad to Ball (7.1ps per mm).
2. Package trace length information is available for these device/package combinations. This information can be used to deskew the package.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 643/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 643 of 947

Table 56: **Sample Window**

Description	Symbol	Device	Speed Grade			Units
			–7	–6	–5	
Sampling Error at Receiver Pins(1)	T_{SAMP}	XC2VP2				ps
		XC2VP4				ps
		XC2VP7		0.50	0.50	ps
		XC2VP20		0.50	0.50	ps
		XC2VP30				ps
		XC2VP40				ps
		XC2VP50				ps
		XC2VP70				ps
		XC2VP100				ps
		XC2VP125				ps

Notes:
1. This parameter indicates the total sampling error of Virtex-II Pro DDR input registers across voltage, temperature, and process. The characterization methodology uses the DCM to capture the DDR input registers' edges of operation. These measurements include:
   - CLK0 and CLK180 DCM jitter
   - Worst-case Duty-Cycle Distortion - T_{DCD_CLK180}
   - DCM accuracy (phase offset)
   - DCM phase shift resolution.

   These measurements do not include package or clock tree skew.

Table 57: **Pin-to-Pin Setup/Hold: Source-Synchronous Configuration**

Description	Symbol	Device	Speed Grade			Units
			–7	–6	–5	
Data Input Set-Up and Hold Times Relative to a Forwarded Clock Input Pin, Using DCM and Global Clock Buffer. For situations where clock and data inputs conform to different standards, adjust the setup and hold values accordingly using the values shown in **IOB Input Switching Characteristics Standard Adjustments**, page 22.						
No Delay Global Clock and IFF with DCM	T_{PSDCM_0}/T_{PHDCM_0}	XC2VP2				ns
		XC2VP4				ns
		XC2VP7				ns
		XC2VP20				ns
		XC2VP30				ns
		XC2VP40				ns
		XC2VP50				ns
		XC2VP70				ns
		XC2VP100				ns
		XC2VP125				ns

Notes:
1. IFF = Input Flip-Flop
2. The timing values were measured using the fine-phase adjustment feature of the DCM.
3. The worst-case duty-cycle distortion and DCM jitter on CLK0 and CLK180 is included in these measurements.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 644 of 947

Source Synchronous Timing Budgets

This section describes how to use the parameters provided in the Source-Synchronous Switching Characteristics section to develop system-specific timing budgets. The following analysis provides information necessary for determining Virtex-II Pro contributions to an overall system timing analysis; no assumptions are made about the effects of Inter-Symbol Interference or PCB skew.

Virtex-II Pro Transmitter Data-Valid Window (T_X)

T_X is the minimum aggregate valid data period for a source-synchronous data bus at the pins of the device and is calculated as follows:

$$T_X = \text{Data Period} - [\text{Jitter}^{(1)} + \text{Duty Cycle Distortion}^{(2)} + \text{TCKSKEW}^{(3)} + \text{TPKGSKEW}^{(4)}]$$

Notes:

1. Jitter values and accumulation methodology to be provided in a future release of this document. The absolute period jitter values found in the DCM Timing Parameters section of the particular DCM output clock used to clock the IOB FF can be used for a best case analysis.
2. This value depends on the clocking methodology used. See Note1 for Table 54.
3. This value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx FPGA_Editor and Timing Analyzer tools to evaluate clock skew specific to your application.
4. These values represent the worst-case skew between any two balls of the package: shortest flight time to longest flight time from Pad to Ball.

Virtex-II Pro Receiver Data-Valid Window (R_X)

R_X is the required minimum aggregate valid data period for a source-synchronous data bus at the pins of the device and is calculated as follows:

$$R_X = [\text{TSAMP}^{(1)} + \text{TCKSKEW}^{(2)} + \text{TPKGSKEW}^{(3)}]$$

Notes:

1. This parameter indicates the total sampling error of Virtex-II Pro DDR input registers across voltage, temperature, and process. The characterization methodology uses the DCM to capture the DDR input registers' edges of operation. These measurements include:
   - CLK0 and CLK180 DCM jitter in a quiet system
   - Worst-case duty-cycle distortion
   - DCM accuracy (phase offset)
   - DCM phase shift resolution.

   These measurements do not include package or clock tree skew.
2. This value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx FPGA_Editor and Timing Analyzer tools to evaluate clock skew specific to your application.
3. These values represent the worst-case skew between any two balls of the package: shortest flight time to longest flight time from Pad to Ball.

Revision History

This section records the change history for this module of the data sheet.

Date	Version	Revision
01/31/02	1.0	Initial Xilinx release.
06/17/02	2.0	• Added new Virtex-II Pro family members. • Added timing parameters from speedsfile **v1.62**. • Added Table 36, Pipelined Multiplier Switching Characteristics. • Added 3.3V-vs-2.5V table entries for some parameters.
09/03/02	2.1	• Added Source-Synchronous Switching Characteristics section. • Added absolute max ratings for 3.3V-vs-2.5V parameters in Table 1. • Added recommended operating conditions for V_{IN} and RocketIO footnote to Table 2. • Updated SSTL2 values in Table 6. Added SSTL18 values: Table 6, Table 31, Table 32. [Table 32 removed in v2.8.] • Added Table 10, which contains LVPECL DC specifications.
09/27/02	2.2	Added section General Power Supply Requirements.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 645/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 645 of 947

Date	Version	Revision
11/20/02	2.3	Updated parametric information in: • Table 1: Increase Absolute Max Rating for V_{CCO}, V_{REF}, V_{IN}, and V_{TS} from 3.6V to 3.75V. Delete cautionary footnotes related to voltage overshoot/undershoot. • Table 2: Delete V_{CCO} specifications for 2.5V and below operation. Delete footnote referencing special information for 3.3V operation. Add footnote for PCI/PCI-X. • Table 3: Add I_{BATT}. Delete I_L specifications for 2.5V and below operation. • Table 4: Add Typical Quiescent Supply Currents for XC2VP4 and XC2VP7 only • Table 6: Correct I_{OL} and I_{OH} for SSTL2 I. Add rows for LVTTL, LVCMOS33, and PCI-X. Correct max V_{IH} from V_{CCO} to 3.6V. • Table 7: Correct Min/Max V_{OD}, V_{OCM}, and V_{ICM} • Table 10: Reformat LVPECL DC Specifications to match Virtex-II data sheet format • Table 11: Correct parameter name from Differential Output Voltage to Single-Ended Output Voltage Swing. • Table 15: Add CPMC405CLOCK max frequencies • Table 23: Add footnote regarding serial data rate limitation in -5 part. • Table 31: Add rows for LVTTL, LVCMOS33, and PCI-X. • Table 32: Add LVTTL, LVCMOS33, and PCI-X. Correct all capacitive load values (except PCI/PCI-X) to 0 pF. [Table 32 removed in v2.8.] • Table 41: Correct CCLK max frequencies
11/25/02	2.4	Table 1: Correct lower limit of voltage range of V_{IN} and V_{TS} from –0.3V to –0.5V for 3.3V.
12/03/02	2.5	Updated parametric information in: • Table 1: Correct lower limit of voltage range of V_{IN} and V_{TS} from –0.5V to –0.3V for 3.3V. • Table 2: Add footnote (2) regarding V_{CCAUX} voltage droop. Renumbered other notes. • Table 11: Add waveform diagrams (Figure 1 and Figure 2) illustrating DV_{OUT} (single-ended) and DV_{PPOUT} (differential). • Table 21: Indicate REFCLK upper frequency limitation; relate REFCLK parameters to REFCLK2, BREFCLK, and BREFCLK2; correct T_{RCLK} and T_{FCLK} values and unit of measurement. • Table 50: Add qualifying footnote to CLKOUT_DUTY_CYCLE_DLL.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 646 of 947

Date	Version	Revision
01/20/03	2.6	Updated parametric information in: • Table 11: Correct DV_{IN} Min (200 mV to 175 mV) and DV_{IN} Max (1000 mV to 2000 mV). • Table 21: Correct T_{RCLK} /T_{FCLK} Typ (400 ps to 600 ps) and Max (600 ps to 1000 ps). Add footnote (2) to qualify Max T_{GJTT} parameter. • Table 49: Correct hyperlink in footnote (1) to point directly to Answer Record 13645. • Move clock parameters from Table 17, Table 18, Table 19, and Table 20 to Table 15.
03/24/03	2.7	• Added/updated timing parameters from speedsfile **v1.76**. • Table 2: Delete first table footnote and renumber all others. • Table 3: Add "sample-tested" to I_L. Remove "Device" column, unnecessary. • Table 8: Update V_{OCM} (Typ) to 1.250V. • Table 10: Update LVPECL_25 DC parameters. • Table 21: Update F_{GCLK} frequency ranges. Break out T_{GJTT} by operating speed. • Table 23: Update F_{GTX} frequency ranges. Correct T_{DJ} to 0.17 UI, T_{RJ} to o.18 UI. • Table 31: Update V_{REF} (Typ) for HSTL Class I/II from 1.08V to 0.90V. • Table 33, Table 34: Correct parameter name "CE input (WS)" to "SR input". • Table 54: Break out T_{DCD_CLK0} by device type.
05/27/03	2.8	• Updated time and frequency parameters as per speedsfile **v1.78**. • Table 3: Added values for I_{REF}, I_L, I_{RPU}, I_{RPD} • Corrected I_{CCINTQ} (Table 4) and $I_{CCINTMIN}$ (Table 5) for XC2VP20 to 600 mA. • Table 4: Updated/Added Typ and Max quiescent current values for XC2VP7 and XC2VP20. Added footnote specifying parameters are for Commercial Grade parts. • Table 5: Added footnote specifying parameters are for Commercial Grade parts. • Table 6: Corrected V_{IH} (Max) for LVTTL and LVCMOS33 standards from 3.6V to 3.45V. Changed V_{IL} (Min) for all standards to –0.2V. Corrected V_{IL} (Max) for LVCMOS15 and LVCMOS18 from 20% V_{CCO} to 30% V_{CCO}. • Table 10: Corrected LVPECL_25 Min and Max values for V_{IH} and V_{IL}. Added explanatory text above table. • Table 12 and Table 13 (pin-pin and reg-reg performance): Changed device specified from XC2VP7FF672-6 to XC2VP20FF1152-6. • Table 14: Updated to show devices XC2VP7 and XC2VP20 as Preliminary for the -6 speed grade and Production for the -5 speed grade. • Removed former Table 32, Standard Capacitive Loads. • Table 42: Updated T_{TAPTCK} from 4.0 ns to 5.5 ns. • Table 49: Modified footnote referenced at CLKFX/CLKFX180 to point to the online Jitter Calculator. • Added Figure 6 and accompanying procedure for measuring standard adjustments.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 647/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 647 of 947

Virtex-II Pro Data Sheet

The Virtex-II Pro Data Sheet contains the following modules:

- Virtex-II Pro™ Platform FPGAs: Introduction and Overview (Module 1)
- Virtex-II Pro™ Platform FPGAs: Functional Description (Module 2)
- Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)
- Virtex-II Pro™ Platform FPGAs: Pinout Information (Module 4)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 648 of 947

Virtex-II Pro™ Platform FPGAs: Pinout Information

DS083-4 (v2.5.3) June 19, 2003

Advance Product Specification

This document provides Virtex-II Pro Device/Package Combinations and Maximum I/Os and Virtex-II Pro Pin Definitions, followed by pinout tables for these packages:

- FG256 Fine-Pitch BGA Package
- FG456 Fine-Pitch BGA Package
- FG676 Fine-Pitch BGA Package
- FF672 Flip-Chip Fine-Pitch BGA Package
- FF896 Flip-Chip Fine-Pitch BGA Package
- FF1152 Flip-Chip Fine-Pitch BGA Package
- FF1148 Flip-Chip Fine-Pitch BGA Package
- FF1517 Flip-Chip Fine-Pitch BGA Package
- FF1704 Flip-Chip Fine-Pitch BGA Package
- FF1696 Flip-Chip Fine-Pitch BGA Package

Virtex-II Pro Device/Package Combinations and Maximum I/Os

Wire-bond and flip-chip packages are available. Table 1 and Table 2 show the maximum number of user I/Os possible in wire-bond and flip-chip packages, respectively.

- FG denotes wire-bond fine-pitch BGA (1.00 mm pitch).
- FF denotes flip-chip fine-pitch BGA (1.00 mm pitch)

Table 1: **Wire-Bond Packages Information**

Package	FG256	FG456	FG676
Pitch (mm)	1.00	1.00	1.00
Size (mm)	17 x 17	23 x 23	26 x 26
Maximum I/Os	140	248	412

Table 2: **Flip-Chip Packages Information**

Package	FF672	FF896	FF1152	FF1148	FF1517	FF1704	FF1696
Pitch (mm)	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Size (mm)	27 x 27	31 x 31	35 x 35	35 x 35	40 x 40	42.5 x 42.5	42.5 x 42.5
Maximum I/Os	396	556	644	812	964	1040	1200

Table 3 shows the number of available I/Os, the number of RocketIO™ multi-gigabit transceiver (MGT) pins, and the number of differential I/O pairs for each Virtex-II Pro device/package combination. The number of I/Os per package includes all user I/Os *except* the fifteen control pins (CCLK, DONE, M0, M1, M2, PROG_B, PWRDWN_B, TCK, TDI, TDO, TMS, HSWAP_EN, DXN, DXP, AND RSVD) and the nine (per transceiver) RocketIO MGT pins (TXP, TXN, RXP, RXN, AVCCAUXTX, AVCCAUXRX, VTTX, VTRX, and GNDA). The number of transceivers in the device is the number of RocketIO MGT pins in Table 3 divided by nine.

Table 3: **Virtex-II Pro Available I/Os and RocketIO MGT Pins per Device/Package Combination**

Virtex-II Pro Device	User I/Os & RocketIO MGT Pins	Virtex-II Pro Package									
		FG256	FG456	FG676	FF672	FF896	FF1152	FF1148	FF1517	FF1704	FF1696
XC2VP2	Available User I/Os	140	156	-	204	-	-	-	-	-	-
	RocketIO MGT Pins	36	36	-	36	-	-	-	-	-	-
	Differential I/O Pairs	68	76	-	100	-	-	-	-	-	-

© 2003 Xilinx, Inc. All rights reserved. All Xilinx trademarks, registered trademarks, patents, and disclaimers are as listed at http://www.xilinx.com/legal.htm. All other trademarks and registered trademarks are the property of their respective owners. All specifications are subject to change without notice.

Table 3: **Virtex-II Pro Available I/Os and RocketIO MGT Pins per Device/Package Combination *(Continued)***

Virtex-II Pro Device	User I/Os & RocketIO MGT Pins	Virtex-II Pro Package									
		FG256	FG456	FG676	FF672	FF896	FF1152	FF1148	FF1517	FF1704	FF1696
XC2VP4	Available User I/Os	140	248	-	348	-	-	-	-	-	-
	RocketIO MGT Pins	36	36	-	36	-	-	-	-	-	-
	Differential I/O Pairs	68	122	-	172	-	-	-	-	-	-
XC2VP7	Available User I/Os	-	248	-	396	396	-	-	-	-	-
	RocketIO MGT Pins	-	72	-	72	72	-	-	-	-	-
	Differential I/O Pairs	-	122	-	196	196	-	-	-	-	-
XC2VP20	Available User I/Os	-	-	404	-	556	564	-	-	-	-
	RocketIO MGT Pins	-	-	72	-	72	72	-	-	-	-
	Differential I/O Pairs	-	-	196	-	272	276	-	-	-	-
XC2VP30	Available User I/Os	-	-	416	-	556	644	-	-	-	-
	RocketIO MGT Pins	-	-	72	-	72	72	-	-	-	-
	Differential I/O Pairs	-	-	202	-	272	340	-	-	-	-
XC2VP40	Available User I/Os	-	-	416	-	-	692	804	-	-	-
	RocketIO MGT Pins	-	-	72	-	-	108	0	-	-	-
	Differential I/O Pairs	-	-	202	-	-	340	396	-	-	-
XC2VP50	Available User I/Os	-	-		-	-	692	812	852	-	-
	RocketIO MGT Pins	-	-		-	-	144	0	144	-	-
	Differential I/O Pairs	-	-		-	-	340	400	420	-	-
XC2VP70	Available User I/Os	-	-		-	-	-	-	964	996	-
	RocketIO MGT Pins	-	-		-	-	-	-	144	180	-
	Differential I/O Pairs	-	-		-	-	-	-	476	492	-

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 650 of 947

Table 3: **Virtex-II Pro Available I/Os and RocketIO MGT Pins per Device/Package Combination *(Continued)***

Virtex-II Pro Device	User I/Os & RocketIO MGT Pins	Virtex-II Pro Package									
		FG256	FG456	FG676	FF672	FF896	FF1152	FF1148	FF1517	FF1704	FF1696
XC2VP100	Available User I/Os	-	-		-	-	-	-	-	1040	1164
	RocketIO MGT Pins	-	-		-	-	-	-	-	180	0
	Differential I/O Pairs	-	-		-	-	-	-	-	512	572
XC2VP125	Available User I/Os	-	-		-	-	-	-	-	1040	1200
	RocketIO MGT Pins	-	-		-	-	-	-	-	180	0
	Differential I/O Pairs	-	-		-	-	-	-	-	512	590

Virtex-II Pro Pin Definitions

This section describes the pinouts for Virtex-II Pro devices in the following packages:

- FG256, FG456, and FG676: wire-bond fine-pitch BGA of 1.00 mm pitch
- FF672, FF896, FF1148, FF1152, FF1517, FF1696, and FF1704: flip-chip fine-pitch BGA of 1.00 mm pitch

All of the devices supported in a particular package are pinout-compatible and are listed in the same table (one table per package). Pins that are not available for smaller devices are listed in right-hand columns.

Each device is split into eight I/O banks to allow for flexibility in the choice of I/O standards. Global pins, including JTAG, configuration, and power/ground pins, are listed at the end of each table. Table 4 provides definitions for all pin types.

All Virtex-II Pro pinout tables are available on the distribution CD-ROM, or on the web (at **http://www.xilinx.com**).

Pin Definitions

Table 4 provides a description of each pin type listed in Virtex-II Pro pinout tables.

Table 4: **Virtex-II Pro Pin Definitions**

Pin Name	Direction	Description
User I/O Pins		
IO_LXXY_#	Input/Output	All user I/O pins are capable of differential signalling and can implement LVDS, ULVDS, BLVDS, LVPECL, or LDT pairs. Each user I/O is labeled "**IO_LXXY_#**", where: **IO** indicates a user I/O pin. **LXXY** indicates a differential pair, with **XX** a unique pair in the bank and **Y = P/N** for the positive and negative sides of the differential pair. **#** indicates the bank number (0 through 7)
Dual-Function Pins		
IO_LXXY_#/ZZZ		The dual-function pins are labelled "**IO_LXXY_#/ZZZ**", where **ZZZ** can be one of the following pins: Per Bank - **VRP, VRN,** or **VREF** Globally - **GCLKX(S/P), BUSY/DOUT, INIT_B, D0/DIN – D7, RDWR_B,** or **CS_B**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 651/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 651 of 947

Table 4: **Virtex-II Pro Pin Definitions *(Continued)***

Pin Name	Direction	Description
With /ZZZ:		
D0/DIN, D1, D2, D3, D4, D5, D6, D7	Input/Output	• *In* SelectMAP *mode,* D0 through D7 are configuration data pins. These pins become user I/Os after configuration, unless the SelectMAP port is retained. • *In bit-serial modes,* DIN (D0) is the single-data input. This pin becomes a user I/O after configuration.
CS_B	Input	In SelectMAP mode, this is the active-low Chip Select signal. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained.
RDWR_B	Input	In SelectMAP mode, this is the active-low Write Enable signal. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained.
BUSY/DOUT	Output	• *In* SelectMAP *mode,* BUSY controls the rate at which configuration data is loaded. The pin becomes a user I/O after configuration, unless the SelectMAP port is retained. • *In bit-serial modes,* DOUT provides preamble and configuration data to downstream devices in a daisy-chain. The pin becomes a user I/O after configuration.
INIT_B	Bidirectional (open-drain)	When Low, this pin indicates that the configuration memory is being cleared. When held Low, the start of configuration is delayed. During configuration, a Low on this output indicates that a configuration data error has occurred. The pin becomes a user I/O after configuration.
GCLKx (S/P)	Input/Output	These are clock input pins that connect to Global Clock Buffers. These pins become regular user I/Os when not needed for clocks.
VRP	Input	This pin is for the DCI voltage reference resistor of P transistor (per bank).
VRN	Input	This pin is for the DCI voltage reference resistor of N transistor (per bank).
ALT_VRP	Input	This is the alternative pin for the DCI voltage reference resistor of P transistor.
ALT_VRN	Input	This is the alternative pin for the DCI voltage reference resistor of N transistor.
V_{REF}	Input	These are input threshold voltage pins. They become user I/Os when an external threshold voltage is not needed (per bank).
Dedicated Pins(1)		
CCLK	Input/Output	Configuration clock. Output in Master mode or Input in Slave mode.
PROG_B	Input	Active Low asynchronous reset to configuration logic. This pin has a permanent weak pull-up resistor.
DONE	Input/Output	DONE is a bidirectional signal with an optional internal pull-up resistor. As an output, this pin indicates completion of the configuration process. As an input, a Low level on DONE can be configured to delay the start-up sequence.
M2, M1, M0	Input	Configuration mode selection.
HSWAP_EN	Input	Enable I/O pullups during configuration.
TCK	Input	Boundary Scan Clock.
TDI	Input	Boundary Scan Data Input.
TDO	Output (open-drain)	Boundary Scan Data Output.
TMS	Input	Boundary Scan Mode Select.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 652 of 947

Table 4: **Virtex-II Pro Pin Definitions *(Continued)***

Pin Name	Direction	Description
PWRDWN_B	Input *(unsupported)*	Active Low power-down pin (unsupported). *Driving this pin Low can adversely affect device operation and configuration.* PWRDWN_B is internally pulled High, which is its default state. It does not require an external pull-up.
Other Pins		
DXN, DXP	N/A	Temperature-sensing diode pins (Anode: DXP, Cathode: DXN).
V_{BATT}	Input	Decryptor key memory backup supply. (Do not connect if battery is not used.)
RSVD	N/A	Reserved pin - do not connect.
V_{CCO}	Input	Power-supply pins for the output drivers (per bank).
V_{CCAUX}	Input	Power-supply pins for auxiliary circuits.
V_{CCINT}	Input	Power-supply pins for the internal core logic.
GND	Input	Ground.
AVCCAUXRX#	Input	Analog power supply for receive circuitry of the RocketIO multi-gigabit transceiver (2.5V).
AVCCAUXTX#	Input	Analog power supply for transmit circuitry of the RocketIO multi-gigabit transceiver (2.5V).
VTRXPAD#	Input	Receive termination supply for the RocketIO multi-gigabit transceiver (1.8V - 2.8V).
VTTXPAD#	Input	Transmit termination supply for the RocketIO multi-gigabit transceiver (1.8V - 2.8V).
GNDA# (2)	Input	Ground for the analog circuitry of the RocketIO multi-gigabit transceiver.
RXPPAD#	Input	Positive differential receive port of the RocketIO multi-gigabit transceiver.
RXNPAD#	Input	Negative differential receive port of the RocketIO multi-gigabit transceiver.
TXPPAD#	Output	Positive differential transmit port of the RocketIO multi-gigabit transceiver.
TXNPAD#	Output	Negative differential transmit port of the RocketIO multi-gigabit transceiver.

Notes:
1. All dedicated pins (JTAG and configuration) are powered by V_{CCAUX} (independent of the bank V_{CCO} voltage).
2. Two pads on the die are tied to the same package pin (GNDA) in order to lower the resistance on these connections. Thus, duplicate entries exist for GNDA pins in the package files on which the tables in this document are based.

BREFCLK Pin Definitions

These dedicated clocks use the same clock inputs for all packages:

Top	BREFCLK	P	GCLK4S	Bottom	BREFCLK	P	GCLK6P
		N	GCLK5P			N	GCLK7S
	BREFCLK2	P	GCLK2S		BREFCLK2	P	GCLK0P
		N	GCLK3P			N	GCLK1S

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 653 of 947

FG256 Fine-Pitch BGA Package

As shown in Table 5, XC2VP2 and XC2VP4 Virtex-II Pro devices are available in the FG256 fine-pitch BGA package. The pins in each of these devices are identical. Following this table are the FG256 Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
0	IO_L01N_0/VRP_0	C2
0	IO_L01P_0/VRN_0	C3
0	IO_L02N_0	B3
0	IO_L02P_0	C4
0	IO_L03N_0	A2
0	IO_L03P_0/VREF_0	A3
0	IO_L06N_0	D5
0	IO_L06P_0	C5
0	IO_L07P_0	D6
0	IO_L09N_0	E6
0	IO_L09P_0/VREF_0	E7
0	IO_L69N_0	D7
0	IO_L69P_0/VREF_0	C7
0	IO_L74N_0/GCLK7P	D8
0	IO_L74P_0/GCLK6S	C8
0	IO_L75N_0/GCLK5P	B8
0	IO_L75P_0/GCLK4S	A8
1	IO_L75N_1/GCLK3P	A9
1	IO_L75P_1/GCLK2S	B9
1	IO_L74N_1/GCLK1P	C9
1	IO_L74P_1/GCLK0S	D9
1	IO_L69N_1/VREF_1	C10
1	IO_L69P_1	D10
1	IO_L09N_1/VREF_1	E10
1	IO_L09P_1	E11
1	IO_L07N_1	D11
1	IO_L06N_1	C12
1	IO_L06P_1	D12
1	IO_L03N_1/VREF_1	A14
1	IO_L03P_1	A15

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 654 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
1	IO_L02N_1	C13
1	IO_L02P_1	B14
1	IO_L01N_1/VRP_1	C14
1	IO_L01P_1/VRN_1	C15
2	IO_L01N_2/VRP_2	E14
2	IO_L01P_2/VRN_2	E15
2	IO_L02N_2	E13
2	IO_L02P_2	F12
2	IO_L03N_2	F13
2	IO_L03P_2	F14
2	IO_L04N_2/VREF_2	F15
2	IO_L04P_2	F16
2	IO_L06N_2	G13
2	IO_L06P_2	G14
2	IO_L85N_2	G15
2	IO_L85P_2	G16
2	IO_L86N_2	G12
2	IO_L86P_2	H13
2	IO_L88N_2/VREF_2	H14
2	IO_L88P_2	H15
2	IO_L90N_2	H16
2	IO_L90P_2	J16
3	IO_L90N_3	J15
3	IO_L90P_3	J14
3	IO_L89N_3	J13
3	IO_L89P_3	K12
3	IO_L87N_3/VREF_3	K16
3	IO_L87P_3	K15
3	IO_L85N_3	K14
3	IO_L85P_3	K13
3	IO_L06N_3	L16
3	IO_L06P_3	L15
3	IO_L05N_3	L14

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 655/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 655 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
3	IO_L05P_3	L13
3	IO_L03N_3/VREF_3	L12
3	IO_L03P_3	M13
3	IO_L02N_3	M16
3	IO_L02P_3	N16
3	IO_L01N_3/VRP_3	M15
3	IO_L01P_3/VRN_3	M14
4	IO_L01N_4/BUSY/DOUT(1)	P15
4	IO_L01P_4/INIT_B	P14
4	IO_L02N_4/D0/DIN(1)	R14
4	IO_L02P_4/D1	P13
4	IO_L03N_4/D2	T15
4	IO_L03P_4/D3	T14
4	IO_L06N_4/VRP_4	N12
4	IO_L06P_4/VRN_4	P12
4	IO_L07P_4/VREF_4	N11
4	IO_L09N_4	M11
4	IO_L09P_4/VREF_4	M10
4	IO_L69N_4	N10
4	IO_L69P_4/VREF_4	P10
4	IO_L74N_4/GCLK3S	N9
4	IO_L74P_4/GCLK2P	P9
4	IO_L75N_4/GCLK1S	R9
4	IO_L75P_4/GCLK0P	T9
5	IO_L75N_5/GCLK7S	T8
5	IO_L75P_5/GCLK6P	R8
5	IO_L74N_5/GCLK5S	P8
5	IO_L74P_5/GCLK4P	N8
5	IO_L69N_5/VREF_5	P7
5	IO_L69P_5	N7
5	IO_L09N_5/VREF_5	M7
5	IO_L09P_5	M6
5	IO_L07N_5/VREF_5	N6

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 656 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
5	IO_L06N_5/VRP_5	P5
5	IO_L06P_5/VRN_5	N5
5	IO_L03N_5/D4	T3
5	IO_L03P_5/D5	T2
5	IO_L02N_5/D6	P4
5	IO_L02P_5/D7	R3
5	IO_L01N_5/RDWR_B	P3
5	IO_L01P_5/CS_B	P2
6	IO_L01P_6/VRN_6	M3
6	IO_L01N_6/VRP_6	M2
6	IO_L02P_6	N1
6	IO_L02N_6	M1
6	IO_L03P_6	M4
6	IO_L03N_6/VREF_6	L5
6	IO_L05P_6	L4
6	IO_L05N_6	L3
6	IO_L06P_6	L2
6	IO_L06N_6	L1
6	IO_L85P_6	K4
6	IO_L85N_6	K3
6	IO_L87P_6	K2
6	IO_L87N_6/VREF_6	K1
6	IO_L89P_6	K5
6	IO_L89N_6	J4
6	IO_L90P_6	J3
6	IO_L90N_6	J2
7	IO_L90P_7	J1
7	IO_L90N_7	H1
7	IO_L88P_7	H2
7	IO_L88N_7/VREF_7	H3
7	IO_L86P_7	H4
7	IO_L86N_7	G5
7	IO_L85P_7	G1

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 657/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 657 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
7	IO_L85N_7	G2
7	IO_L06P_7	G3
7	IO_L06N_7	G4
7	IO_L04P_7	F1
7	IO_L04N_7/VREF_7	F2
7	IO_L03P_7	F3
7	IO_L03N_7	F4
7	IO_L02P_7	F5
7	IO_L02N_7	E4
7	IO_L01P_7/VRN_7	E2
7	IO_L01N_7/VRP_7	E3
0	VCCO_0	F8
0	VCCO_0	F7
0	VCCO_0	E8
1	VCCO_1	F9
1	VCCO_1	F10
1	VCCO_1	E9
2	VCCO_2	H12
2	VCCO_2	H11
2	VCCO_2	G11
3	VCCO_3	K11
3	VCCO_3	J12
3	VCCO_3	J11
4	VCCO_4	M9
4	VCCO_4	L9
4	VCCO_4	L10
5	VCCO_5	M8
5	VCCO_5	L8
5	VCCO_5	L7
6	VCCO_6	K6
6	VCCO_6	J6
6	VCCO_6	J5
7	VCCO_7	H6
7	VCCO_7	H5

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 658 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
7	VCCO_7	G6
N/A	CCLK	N15
N/A	PROG_B	D1
N/A	DONE	P16
N/A	M0	N3
N/A	M1	N2
N/A	M2	P1
N/A	TCK	D16
N/A	TDI	E1
N/A	TDO	E16
N/A	TMS	C16
N/A	PWRDWN_B	N14
N/A	HSWAP_EN	C1
N/A	RSVD	D14
N/A	VBATT	D15
N/A	DXP	D2
N/A	DXN	D3
N/A	AVCCAUXTX6	B5
N/A	VTTXPAD6	B4
N/A	TXNPAD6	A4
N/A	TXPPAD6	A5
N/A	GNDA6	C6
N/A	RXPPAD6	A6
N/A	RXNPAD6	A7
N/A	VTRXPAD6	B6
N/A	AVCCAUXRX6	B7
N/A	AVCCAUXTX7	B11
N/A	VTTXPAD7	B10
N/A	TXNPAD7	A10
N/A	TXPPAD7	A11
N/A	GNDA7	C11
N/A	RXPPAD7	A12
N/A	RXNPAD7	A13
N/A	VTRXPAD7	B12

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 659/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 659 of 947

Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
N/A	AVCCAUXRX7	B13
N/A	AVCCAUXRX18	R13
N/A	VTRXPAD18	R12
N/A	RXNPAD18	T13
N/A	RXPPAD18	T12
N/A	GNDA18	P11
N/A	TXPPAD18	T11
N/A	TXNPAD18	T10
N/A	VTTXPAD18	R10
N/A	AVCCAUXTX18	R11
N/A	AVCCAUXRX19	R7
N/A	VTRXPAD19	R6
N/A	RXNPAD19	T7
N/A	RXPPAD19	T6
N/A	GNDA19	P6
N/A	TXPPAD19	T5
N/A	TXNPAD19	T4
N/A	VTTXPAD19	R4
N/A	AVCCAUXTX19	R5
N/A	VCCINT	N4
N/A	VCCINT	N13
N/A	VCCINT	M5
N/A	VCCINT	M12
N/A	VCCINT	E5
N/A	VCCINT	E12
N/A	VCCINT	D4
N/A	VCCINT	D13
N/A	VCCAUX	R16
N/A	VCCAUX	R1
N/A	VCCAUX	B16
N/A	VCCAUX	B1
N/A	GND	T16
N/A	GND	T1
N/A	GND	R2

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 660 of 947


Table 5: **FG256 — XC2VP2 and XC2VP4**

Bank	Pin Description	Pin Number
N/A	GND	R15
N/A	GND	L6
N/A	GND	L11
N/A	GND	K9
N/A	GND	K8
N/A	GND	K7
N/A	GND	K10
N/A	GND	J9
N/A	GND	J8
N/A	GND	J7
N/A	GND	J10
N/A	GND	H9
N/A	GND	H8
N/A	GND	H7
N/A	GND	H10
N/A	GND	G9
N/A	GND	G8
N/A	GND	G7
N/A	GND	G10
N/A	GND	F6
N/A	GND	F11
N/A	GND	B2
N/A	GND	B15
N/A	GND	A16
N/A	GND	A1

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 661/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 661 of 947

FG256 Fine-Pitch BGA Package Specifications (1.00mm pitch)

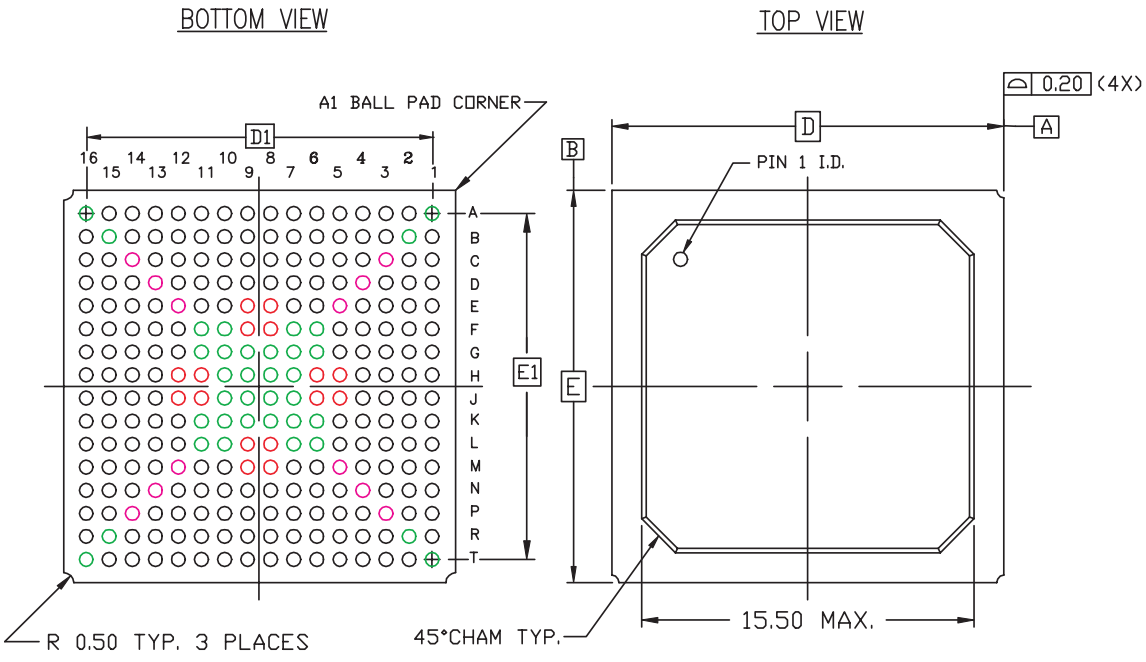

SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A		1.73	2.00
A_1	0.40	0.50	0.60
D/E	17.00 BSC		
D_1/E_1	15.00 REF		
e	1.00 BSC		
øb	0.50	0.60	0.70
aaa			0.20
ccc			0.35
ddd			0.30
eee			0.10
M	16		

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MO–151 AAF–1.

Figure 1: **FG256 Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 662 of 947

FG456 Fine-Pitch BGA Package

As shown in Table 6, XC2VP2, XC2VP4, and XC2VP7 Virtex-II Pro devices are available in the FG456 fine-pitch BGA package. The pins in these devices are same, except for the differences shown in the "No Connects" column. Following this table are the FG456 Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
0	IO_L01N_0/VRP_0	D5			
0	IO_L01P_0/VRN_0	D6			
0	IO_L02N_0	E6			
0	IO_L02P_0	E7			
0	IO_L03N_0	D7			
0	IO_L03P_0/VREF_0	C7			
0	IO_L05_0/No_Pair	E8			
0	IO_L06N_0	D8			
0	IO_L06P_0	C8			
0	IO_L07N_0	F9			
0	IO_L07P_0	E9			
0	IO_L09N_0	D9			
0	IO_L09P_0/VREF_0	D10			
0	IO_L67N_0	F10			
0	IO_L67P_0	E10			
0	IO_L69N_0	C10			
0	IO_L69P_0/VREF_0	B11			
0	IO_L74N_0/GCLK7P	F11			
0	IO_L74P_0/GCLK6S	E11			
0	IO_L75N_0/GCLK5P	D11			
0	IO_L75P_0/GCLK4S	C11			
1	IO_L75N_1/GCLK3P	C12			
1	IO_L75P_1/GCLK2S	D12			
1	IO_L74N_1/GCLK1P	E12			
1	IO_L74P_1/GCLK0S	F12			
1	IO_L69N_1/VREF_1	B12			
1	IO_L69P_1	C13			
1	IO_L67N_1	E13			
1	IO_L67P_1	F13			
1	IO_L09N_1/VREF_1	D13			
1	IO_L09P_1	D14			
1	IO_L07N_1	E14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 663/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 663 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
1	IO_L07P_1	F14			
1	IO_L06N_1	C15			
1	IO_L06P_1	D15			
1	IO_L05_1/No_Pair	E15			
1	IO_L03N_1/VREF_1	C16			
1	IO_L03P_1	D16			
1	IO_L02N_1	E16			
1	IO_L02P_1	E17			
1	IO_L01N_1/VRP_1	D17			
1	IO_L01P_1/VRN_1	D18			
2	IO_L01N_2/VRP_2	C21			
2	IO_L01P_2/VRN_2	C22			
2	IO_L02N_2	D21			
2	IO_L02P_2	D22			
2	IO_L03N_2	E19			
2	IO_L03P_2	E20			
2	IO_L04N_2/VREF_2	E21			
2	IO_L04P_2	E22			
2	IO_L06N_2	F19			
2	IO_L06P_2	F20			
2	IO_L43N_2	F21	NC		
2	IO_L43P_2	F22	NC		
2	IO_L46N_2/VREF_2	F18	NC		
2	IO_L46P_2	G18	NC		
2	IO_L48N_2	G19	NC		
2	IO_L48P_2	G20	NC		
2	IO_L49N_2	G21	NC		
2	IO_L49P_2	G22	NC		
2	IO_L50N_2	H19	NC		
2	IO_L50P_2	H20	NC		
2	IO_L52N_2/VREF_2	H21	NC		
2	IO_L52P_2	H22	NC		
2	IO_L54N_2	H18	NC		
2	IO_L54P_2	J17	NC		
2	IO_L55N_2	J19	NC		
2	IO_L55P_2	J20	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 664 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
2	IO_L56N_2	J21	NC		
2	IO_L56P_2	J22	NC		
2	IO_L58N_2/VREF_2	J18	NC		
2	IO_L58P_2	K18	NC		
2	IO_L60N_2	K19	NC		
2	IO_L60P_2	K20	NC		
2	IO_L85N_2	K21			
2	IO_L85P_2	K22			
2	IO_L86N_2	K17			
2	IO_L86P_2	L17			
2	IO_L88N_2/VREF_2	L18			
2	IO_L88P_2	L19			
2	IO_L90N_2	L20			
2	IO_L90P_2	L21			
3	IO_L90N_3	M21			
3	IO_L90P_3	M20			
3	IO_L89N_3	M19			
3	IO_L89P_3	M18			
3	IO_L87N_3/VREF_3	M17			
3	IO_L87P_3	N17			
3	IO_L85N_3	N22			
3	IO_L85P_3	N21			
3	IO_L60N_3	N20	NC		
3	IO_L60P_3	N19	NC		
3	IO_L59N_3	N18	NC		
3	IO_L59P_3	P18	NC		
3	IO_L57N_3/VREF_3	P22	NC		
3	IO_L57P_3	P21	NC		
3	IO_L55N_3	P20	NC		
3	IO_L55P_3	P19	NC		
3	IO_L54N_3	P17	NC		
3	IO_L54P_3	R18	NC		
3	IO_L53N_3	R22	NC		
3	IO_L53P_3	R21	NC		
3	IO_L51N_3/VREF_3	R20	NC		
3	IO_L51P_3	R19	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 665/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 665 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
3	IO_L49N_3	T22	NC		
3	IO_L49P_3	T21	NC		
3	IO_L48N_3	T20	NC		
3	IO_L48P_3	T19	NC		
3	IO_L47N_3	T18	NC		
3	IO_L47P_3	U18	NC		
3	IO_L45N_3/VREF_3	U22	NC		
3	IO_L45P_3	U21	NC		
3	IO_L43N_3	U20	NC		
3	IO_L43P_3	U19	NC		
3	IO_L06N_3	V22			
3	IO_L06P_3	V21			
3	IO_L05N_3	V20			
3	IO_L05P_3	V19			
3	IO_L03N_3/VREF_3	W22			
3	IO_L03P_3	W21			
3	IO_L02N_3	Y22			
3	IO_L02P_3	Y21			
3	IO_L01N_3/VRP_3	AA22			
3	IO_L01P_3/VRN_3	AB21			
4	IO_L01N_4/BUSY/DOUT(1)	W18			
4	IO_L01P_4/INIT_B	W17			
4	IO_L02N_4/D0/DIN(1)	V17			
4	IO_L02P_4/D1	V16			
4	IO_L03N_4/D2	W16			
4	IO_L03P_4/D3	Y16			
4	IO_L05_4/No_Pair	V15			
4	IO_L06N_4/VRP_4	W15			
4	IO_L06P_4/VRN_4	Y15			
4	IO_L07N_4	U14			
4	IO_L07P_4/VREF_4	V14			
4	IO_L09N_4	W14			
4	IO_L09P_4/VREF_4	W13			
4	IO_L67N_4	U13			
4	IO_L67P_4	V13			
4	IO_L69N_4	Y13			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 666 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
4	IO_L69P_4/VREF_4	AA12			
4	IO_L74N_4/GCLK3S	U12			
4	IO_L74P_4/GCLK2P	V12			
4	IO_L75N_4/GCLK1S	W12			
4	IO_L75P_4/GCLK0P	Y12			
5	IO_L75N_5/GCLK7S	Y11			
5	IO_L75P_5/GCLK6P	W11			
5	IO_L74N_5/GCLK5S	V11			
5	IO_L74P_5/GCLK4P	U11			
5	IO_L69N_5/VREF_5	AA11			
5	IO_L69P_5	Y10			
5	IO_L67N_5	V10			
5	IO_L67P_5	U10			
5	IO_L09N_5/VREF_5	W10			
5	IO_L09P_5	W9			
5	IO_L07N_5/VREF_5	V9			
5	IO_L07P_5	U9			
5	IO_L06N_5/VRP_5	Y8			
5	IO_L06P_5/VRN_5	W8			
5	IO_L05_5/No_Pair	V8			
5	IO_L03N_5/D4	Y7			
5	IO_L03P_5/D5	W7			
5	IO_L02N_5/D6	V7			
5	IO_L02P_5/D7	V6			
5	IO_L01N_5/RDWR_B	W6			
5	IO_L01P_5/CS_B	W5			
6	IO_L01P_6/VRN_6	AB2			
6	IO_L01N_6/VRP_6	AA1			
6	IO_L02P_6	Y2			
6	IO_L02N_6	Y1			
6	IO_L03P_6	W2			
6	IO_L03N_6/VREF_6	W1			
6	IO_L05P_6	V4			
6	IO_L05N_6	V3			
6	IO_L06P_6	V2			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 667/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 667 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
6	IO_L06N_6	V1			
6	IO_L43P_6	U4	NC		
6	IO_L43N_6	U3	NC		
6	IO_L45P_6	U2	NC		
6	IO_L45N_6/VREF_6	U1	NC		
6	IO_L47P_6	U5	NC		
6	IO_L47N_6	T5	NC		
6	IO_L48P_6	T4	NC		
6	IO_L48N_6	T3	NC		
6	IO_L49P_6	T2	NC		
6	IO_L49N_6	T1	NC		
6	IO_L51P_6	R4	NC		
6	IO_L51N_6/VREF_6	R3	NC		
6	IO_L53P_6	R2	NC		
6	IO_L53N_6	R1	NC		
6	IO_L54P_6	R5	NC		
6	IO_L54N_6	P6	NC		
6	IO_L55P_6	P4	NC		
6	IO_L55N_6	P3	NC		
6	IO_L57P_6	P2	NC		
6	IO_L57N_6/VREF_6	P1	NC		
6	IO_L59P_6	P5	NC		
6	IO_L59N_6	N5	NC		
6	IO_L60P_6	N4	NC		
6	IO_L60N_6	N3	NC		
6	IO_L85P_6	N2			
6	IO_L85N_6	N1			
6	IO_L87P_6	N6			
6	IO_L87N_6/VREF_6	M6			
6	IO_L89P_6	M5			
6	IO_L89N_6	M4			
6	IO_L90P_6	M3			
6	IO_L90N_6	M2			
7	IO_L90P_7	L2			
7	IO_L90N_7	L3			
7	IO_L88P_7	L4			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 668 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
7	IO_L88N_7/VREF_7	L5			
7	IO_L86P_7	L6			
7	IO_L86N_7	K6			
7	IO_L85P_7	K1			
7	IO_L85N_7	K2			
7	IO_L60P_7	K3	NC		
7	IO_L60N_7	K4	NC		
7	IO_L58P_7	K5	NC		
7	IO_L58N_7/VREF_7	J5	NC		
7	IO_L56P_7	J1	NC		
7	IO_L56N_7	J2	NC		
7	IO_L55P_7	J3	NC		
7	IO_L55N_7	J4	NC		
7	IO_L54P_7	J6	NC		
7	IO_L54N_7	H5	NC		
7	IO_L52P_7	H1	NC		
7	IO_L52N_7/VREF_7	H2	NC		
7	IO_L50P_7	H3	NC		
7	IO_L50N_7	H4	NC		
7	IO_L49P_7	G1	NC		
7	IO_L49N_7	G2	NC		
7	IO_L48P_7	G3	NC		
7	IO_L48N_7	G4	NC		
7	IO_L46P_7	G5	NC		
7	IO_L46N_7/VREF_7	F5	NC		
7	IO_L43P_7	F1	NC		
7	IO_L43N_7	F2	NC		
7	IO_L06P_7	F3			
7	IO_L06N_7	F4			
7	IO_L04P_7	E1			
7	IO_L04N_7/VREF_7	E2			
7	IO_L03P_7	E3			
7	IO_L03N_7	E4			
7	IO_L02P_7	D1			
7	IO_L02N_7	D2			
7	IO_L01P_7/VRN_7	C1			
7	IO_L01N_7/VRP_7	C2			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 669/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 669 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
0	VCCO_0	G9			
0	VCCO_0	G11			
0	VCCO_0	G10			
0	VCCO_0	F8			
0	VCCO_0	F7			
1	VCCO_1	G14			
1	VCCO_1	G13			
1	VCCO_1	G12			
1	VCCO_1	F16			
1	VCCO_1	F15			
2	VCCO_2	L16			
2	VCCO_2	K16			
2	VCCO_2	J16			
2	VCCO_2	H17			
2	VCCO_2	G17			
3	VCCO_3	T17			
3	VCCO_3	R17			
3	VCCO_3	P16			
3	VCCO_3	N16			
3	VCCO_3	M16			
4	VCCO_4	U16			
4	VCCO_4	U15			
4	VCCO_4	T14			
4	VCCO_4	T13			
4	VCCO_4	T12			
5	VCCO_5	U8			
5	VCCO_5	U7			
5	VCCO_5	T9			
5	VCCO_5	T11			
5	VCCO_5	T10			
6	VCCO_6	T6			
6	VCCO_6	R6			
6	VCCO_6	P7			
6	VCCO_6	N7			
6	VCCO_6	M7			
7	VCCO_7	L7			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 670 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
7	VCCO_7	K7			
7	VCCO_7	J7			
7	VCCO_7	H6			
7	VCCO_7	G6			
N/A	CCLK	W20			
N/A	PROG_B	B1			
N/A	DONE	Y18			
N/A	M0	Y4			
N/A	M1	W3			
N/A	M2	Y5			
N/A	TCK	B22			
N/A	TDI	D3			
N/A	TDO	D20			
N/A	TMS	A21			
N/A	PWRDWN_B	Y19			
N/A	HSWAP_EN	A2			
N/A	RSVD	C18			
N/A	VBATT	C19			
N/A	DXP	C4			
N/A	DXN	C5			
N/A	AVCCAUXTX4	B4	NC	NC	
N/A	VTTXPAD4	B3	NC	NC	
N/A	TXNPAD4	A3	NC	NC	
N/A	TXPPAD4	A4	NC	NC	
N/A	GNDA4	C6	NC	NC	
N/A	RXPPAD4	A5	NC	NC	
N/A	RXNPAD4	A6	NC	NC	
N/A	VTRXPAD4	B5	NC	NC	
N/A	AVCCAUXRX4	B6	NC	NC	
N/A	AVCCAUXTX6	B8			
N/A	VTTXPAD6	B7			
N/A	TXNPAD6	A7			
N/A	TXPPAD6	A8			
N/A	GNDA6	C9			
N/A	RXPPAD6	A9			
N/A	RXNPAD6	A10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 671/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 671 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	VTRXPAD6	B9			
N/A	AVCCAUXRX6	B10			
N/A	AVCCAUXTX7	B14			
N/A	VTTXPAD7	B13			
N/A	TXNPAD7	A13			
N/A	TXPPAD7	A14			
N/A	GNDA7	C14			
N/A	RXPPAD7	A15			
N/A	RXNPAD7	A16			
N/A	VTRXPAD7	B15			
N/A	AVCCAUXRX7	B16			
N/A	AVCCAUXTX9	B18	NC	NC	
N/A	VTTXPAD9	B17	NC	NC	
N/A	TXNPAD9	A17	NC	NC	
N/A	TXPPAD9	A18	NC	NC	
N/A	GNDA9	C17	NC	NC	
N/A	RXPPAD9	A19	NC	NC	
N/A	RXNPAD9	A20	NC	NC	
N/A	VTRXPAD9	B19	NC	NC	
N/A	AVCCAUXRX9	B20	NC	NC	
N/A	AVCCAUXRX16	AA20	NC	NC	
N/A	VTRXPAD16	AA19	NC	NC	
N/A	RXNPAD16	AB20	NC	NC	
N/A	RXPPAD16	AB19	NC	NC	
N/A	GNDA16	Y17	NC	NC	
N/A	TXPPAD16	AB18	NC	NC	
N/A	TXNPAD16	AB17	NC	NC	
N/A	VTTXPAD16	AA17	NC	NC	
N/A	AVCCAUXTX16	AA18	NC	NC	
N/A	AVCCAUXRX18	AA16			
N/A	VTRXPAD18	AA15			
N/A	RXNPAD18	AB16			
N/A	RXPPAD18	AB15			
N/A	GNDA18	Y14			
N/A	TXPPAD18	AB14			
N/A	TXNPAD18	AB13			
N/A	VTTXPAD18	AA13			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 672 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	AVCCAUXTX18	AA14			
N/A	AVCCAUXRX19	AA10			
N/A	VTRXPAD19	AA9			
N/A	RXNPAD19	AB10			
N/A	RXPPAD19	AB9			
N/A	GNDA19	Y9			
N/A	TXPPAD19	AB8			
N/A	TXNPAD19	AB7			
N/A	VTTXPAD19	AA7			
N/A	AVCCAUXTX19	AA8			
N/A	AVCCAUXRX21	AA6	NC	NC	
N/A	VTRXPAD21	AA5	NC	NC	
N/A	RXNPAD21	AB6	NC	NC	
N/A	RXPPAD21	AB5	NC	NC	
N/A	GNDA21	Y6	NC	NC	
N/A	TXPPAD21	AB4	NC	NC	
N/A	TXNPAD21	AB3	NC	NC	
N/A	VTTXPAD21	AA3	NC	NC	
N/A	AVCCAUXTX21	AA4	NC	NC	
N/A	VCCINT	U6			
N/A	VCCINT	U17			
N/A	VCCINT	T8			
N/A	VCCINT	T7			
N/A	VCCINT	T16			
N/A	VCCINT	T15			
N/A	VCCINT	R7			
N/A	VCCINT	R16			
N/A	VCCINT	H7			
N/A	VCCINT	H16			
N/A	VCCINT	G8			
N/A	VCCINT	G7			
N/A	VCCINT	G16			
N/A	VCCINT	G15			
N/A	VCCINT	F6			
N/A	VCCINT	F17			
N/A	VCCAUX	M22			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 673/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 673 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	VCCAUX	L1			
N/A	VCCAUX	B21			
N/A	VCCAUX	B2			
N/A	VCCAUX	AB11			
N/A	VCCAUX	AA21			
N/A	VCCAUX	AA2			
N/A	VCCAUX	A12			
N/A	GND	Y3			
N/A	GND	Y20			
N/A	GND	W4			
N/A	GND	W19			
N/A	GND	V5			
N/A	GND	V18			
N/A	GND	P9			
N/A	GND	P14			
N/A	GND	P13			
N/A	GND	P12			
N/A	GND	P11			
N/A	GND	P10			
N/A	GND	N9			
N/A	GND	N14			
N/A	GND	N13			
N/A	GND	N12			
N/A	GND	N11			
N/A	GND	N10			
N/A	GND	M9			
N/A	GND	M14			
N/A	GND	M13			
N/A	GND	M12			
N/A	GND	M11			
N/A	GND	M10			
N/A	GND	M1			
N/A	GND	L9			
N/A	GND	L22			
N/A	GND	L14			
N/A	GND	L13			
N/A	GND	L12			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 674 of 947

Table 6: **FG456 — XC2VP2, XC2VP4, and XC2VP7**


Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	GND	L11			
N/A	GND	L10			
N/A	GND	K9			
N/A	GND	K14			
N/A	GND	K13			
N/A	GND	K12			
N/A	GND	K11			
N/A	GND	K10			
N/A	GND	J9			
N/A	GND	J14			
N/A	GND	J13			
N/A	GND	J12			
N/A	GND	J11			
N/A	GND	J10			
N/A	GND	E5			
N/A	GND	E18			
N/A	GND	D4			
N/A	GND	D19			
N/A	GND	C3			
N/A	GND	C20			
N/A	GND	AB22			
N/A	GND	AB12			
N/A	GND	AB1			
N/A	GND	A22			
N/A	GND	A11			
N/A	GND	A1			

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 675 of 947

FG456 Fine-Pitch BGA Package Specifications (1.00mm pitch)

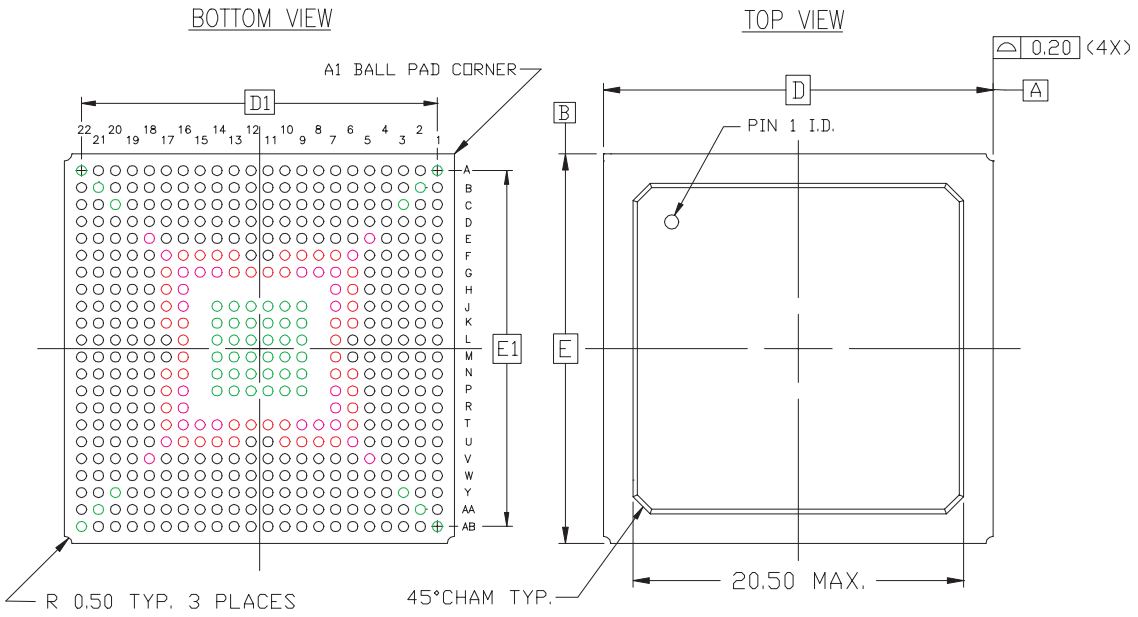

SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A		2.20	2.60
A_1	0.40	0.50	0.60
D/E	23.00 BSC		
D_1/E_1	21.00 REF		
e	1.00 BSC		
øb	0.50	0.60	0.70
aaa			0.20
ccc			0.35
ddd			0.30
eee			0.10
M	22		

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MO–151 AAJ–1 (DEPOPULATED)

Figure 2: **FG456 Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 676 of 947

FG676 Fine-Pitch BGA Package

As shown in Table 7, XC2VP20, XC2VP30, and XC2VP40 Virtex-II Pro devices are available in the FG676 fine-pitch BGA package. The pins in these devices are the same, except for the differences shown in the "No Connects" column. Following this table are the FG676 Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
0	IO_L01N_0/VRP_0	E5			
0	IO_L01P_0/VRN_0	D5			
0	IO_L02N_0	E6			
0	IO_L02P_0	D6			
0	IO_L03N_0	G7			
0	IO_L03P_0/VREF_0	F7			
0	IO_L05_0/No_Pair	E7			
0	IO_L06N_0	D7			
0	IO_L06P_0	C7			
0	IO_L07N_0	H8			
0	IO_L07P_0	G8			
0	IO_L09N_0	F8			
0	IO_L09P_0/VREF_0	E8			
0	IO_L37N_0	B8			
0	IO_L37P_0	A8			
0	IO_L39N_0	H9			
0	IO_L39P_0	G9			
0	IO_L43N_0	F9			
0	IO_L43P_0	E9			
0	IO_L45N_0	D9			
0	IO_L45P_0/VREF_0	C9			
0	IO_L46N_0	H10			
0	IO_L46P_0	H11			
0	IO_L48N_0	E10			
0	IO_L48P_0	E11			
0	IO_L49N_0	D10			
0	IO_L49P_0	C10			
0	IO_L50_0/No_Pair	G11			
0	IO_L53_0/No_Pair	F11			
0	IO_L54N_0	J12			
0	IO_L54P_0	H12			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 677/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 677 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
0	IO_L55N_0	G12			
0	IO_L55P_0	F12			
0	IO_L57N_0	E12			
0	IO_L57P_0/VREF_0	F13			
0	IO_L67N_0	D12			
0	IO_L67P_0	C12			
0	IO_L69N_0	J13			
0	IO_L69P_0/VREF_0	H13			
0	IO_L74N_0/GCLK7P	E13			
0	IO_L74P_0/GCLK6S	D13			
0	IO_L75N_0/GCLK5P	C13			
0	IO_L75P_0/GCLK4S	B13			
1	IO_L75N_1/GCLK3P	B14			
1	IO_L75P_1/GCLK2S	C14			
1	IO_L74N_1/GCLK1P	D14			
1	IO_L74P_1/GCLK0S	E14			
1	IO_L69N_1/VREF_1	H14			
1	IO_L69P_1	J14			
1	IO_L67N_1	C15			
1	IO_L67P_1	D15			
1	IO_L57N_1/VREF_1	F14			
1	IO_L57P_1	E15			
1	IO_L55N_1	F15			
1	IO_L55P_1	G15			
1	IO_L54N_1	H15			
1	IO_L54P_1	J15			
1	IO_L53_1/No_Pair	F16			
1	IO_L50_1/No_Pair	G16			
1	IO_L49N_1	C17			
1	IO_L49P_1	D17			
1	IO_L48N_1	E16			
1	IO_L48P_1	E17			
1	IO_L46N_1	H16			
1	IO_L46P_1	H17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 678 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
1	IO_L45N_1/VREF_1	C18			
1	IO_L45P_1	D18			
1	IO_L43N_1	E18			
1	IO_L43P_1	F18			
1	IO_L39N_1	G18			
1	IO_L39P_1	H18			
1	IO_L37N_1	A19			
1	IO_L37P_1	B19			
1	IO_L09N_1/VREF_1	E19			
1	IO_L09P_1	F19			
1	IO_L07N_1	G19			
1	IO_L07P_1	H19			
1	IO_L06N_1	C20			
1	IO_L06P_1	D20			
1	IO_L05_1/No_Pair	E20			
1	IO_L03N_1/VREF_1	F20			
1	IO_L03P_1	G20			
1	IO_L02N_1	D21			
1	IO_L02P_1	E21			
1	IO_L01N_1/VRP_1	D22			
1	IO_L01P_1/VRN_1	E22			
2	IO_L01N_2/VRP_2	C25			
2	IO_L01P_2/VRN_2	C26			
2	IO_L02N_2	D25			
2	IO_L02P_2	D26			
2	IO_L03N_2	E23			
2	IO_L03P_2	F22			
2	IO_L04N_2/VREF_2	E25			
2	IO_L04P_2	E26			
2	IO_L06N_2	F21			
2	IO_L06P_2	G21			
2	IO_L24N_2	F23	NC		
2	IO_L24P_2	F24	NC		
2	IO_L31N_2	F25			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 679/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 679 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
2	IO_L31P_2	F26			
2	IO_L32N_2	G22			
2	IO_L32P_2	H22			
2	IO_L34N_2/VREF_2	G23			
2	IO_L34P_2	G24			
2	IO_L36N_2	G25			
2	IO_L36P_2	G26			
2	IO_L37N_2	H20			
2	IO_L37P_2	H21			
2	IO_L38N_2	H25			
2	IO_L38P_2	H26			
2	IO_L40N_2/VREF_2	J19			
2	IO_L40P_2	J20			
2	IO_L42N_2	J21			
2	IO_L42P_2	J22			
2	IO_L43N_2	J23			
2	IO_L43P_2	J24			
2	IO_L44N_2	J25			
2	IO_L44P_2	J26			
2	IO_L46N_2/VREF_2	K19			
2	IO_L46P_2	L19			
2	IO_L48N_2	K22			
2	IO_L48P_2	K23			
2	IO_L49N_2	K24			
2	IO_L49P_2	L24			
2	IO_L50N_2	K25			
2	IO_L50P_2	K26			
2	IO_L52N_2/VREF_2	L20			
2	IO_L52P_2	M20			
2	IO_L54N_2	L21			
2	IO_L54P_2	L22			
2	IO_L55N_2	L25			
2	IO_L55P_2	L26			
2	IO_L56N_2	M18			
2	IO_L56P_2	M19			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 680 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
2	IO_L58N_2/VREF_2	M21			
2	IO_L58P_2	N21			
2	IO_L60N_2	M22			
2	IO_L60P_2	M23			
2	IO_L85N_2	M25			
2	IO_L85P_2	M26			
2	IO_L86N_2	N18			
2	IO_L86P_2	N19			
2	IO_L88N_2/VREF_2	N22			
2	IO_L88P_2	N23			
2	IO_L90N_2	N24			
2	IO_L90P_2	N25			
3	IO_L90N_3	P25			
3	IO_L90P_3	P24			
3	IO_L89N_3	P23			
3	IO_L89P_3	P22			
3	IO_L87N_3/VREF_3	P19			
3	IO_L87P_3	P18			
3	IO_L85N_3	R26			
3	IO_L85P_3	R25			
3	IO_L60N_3	R23			
3	IO_L60P_3	R22			
3	IO_L59N_3	P21			
3	IO_L59P_3	R21			
3	IO_L57N_3/VREF_3	R19			
3	IO_L57P_3	R18			
3	IO_L55N_3	T26			
3	IO_L55P_3	T25			
3	IO_L54N_3	T22			
3	IO_L54P_3	T21			
3	IO_L53N_3	R20			
3	IO_L53P_3	T20			
3	IO_L51N_3/VREF_3	U26			
3	IO_L51P_3	U25			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 681/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 681 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
3	IO_L49N_3	T24			
3	IO_L49P_3	U24			
3	IO_L48N_3	U23			
3	IO_L48P_3	U22			
3	IO_L47N_3	T19			
3	IO_L47P_3	U19			
3	IO_L45N_3/VREF_3	V26			
3	IO_L45P_3	V25			
3	IO_L43N_3	V24			
3	IO_L43P_3	V23			
3	IO_L42N_3	V22			
3	IO_L42P_3	V21			
3	IO_L41N_3	V20			
3	IO_L41P_3	V19			
3	IO_L39N_3/VREF_3	W26			
3	IO_L39P_3	W25			
3	IO_L37N_3	W21			
3	IO_L37P_3	W20			
3	IO_L36N_3	Y26			
3	IO_L36P_3	Y25			
3	IO_L35N_3	Y24			
3	IO_L35P_3	Y23			
3	IO_L33N_3/VREF_3	W22			
3	IO_L33P_3	Y22			
3	IO_L31N_3	AA26			
3	IO_L31P_3	AA25			
3	IO_L24N_3	AA24	NC		
3	IO_L24P_3	AA23	NC		
3	IO_L23N_3	Y21	NC		
3	IO_L23P_3	AA21	NC		
3	IO_L06N_3	AB26			
3	IO_L06P_3	AB25			
3	IO_L05N_3	AA22			
3	IO_L05P_3	AB23			
3	IO_L03N_3/VREF_3	AC26			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 682 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
3	IO_L03P_3	AC25			
3	IO_L02N_3	AC24			
3	IO_L02P_3	AD25			
3	IO_L01N_3/VRP_3	AD26			
3	IO_L01P_3/VRN_3	AE26			
4	IO_L01N_4/BUSY/DOUT(1)	AB22			
4	IO_L01P_4/INIT_B	AC22			
4	IO_L02N_4/D0/DIN(1)	AB21			
4	IO_L02P_4/D1	AC21			
4	IO_L03N_4/D2	Y20			
4	IO_L03P_4/D3	AA20			
4	IO_L05_4/No_Pair	AB20			
4	IO_L06N_4/VRP_4	AC20			
4	IO_L06P_4/VRN_4	AD20			
4	IO_L07N_4	W19			
4	IO_L07P_4/VREF_4	Y19			
4	IO_L09N_4	AA19			
4	IO_L09P_4/VREF_4	AB19			
4	IO_L37N_4	AE19			
4	IO_L37P_4	AF19			
4	IO_L39N_4	W18			
4	IO_L39P_4	Y18			
4	IO_L43N_4	AA18			
4	IO_L43P_4	AB18			
4	IO_L45N_4	AC18			
4	IO_L45P_4/VREF_4	AD18			
4	IO_L46N_4	W17			
4	IO_L46P_4	W16			
4	IO_L48N_4	AB17			
4	IO_L48P_4	AB16			
4	IO_L49N_4	AC17			
4	IO_L49P_4	AD17			
4	IO_L50_4/No_Pair	Y16			
4	IO_L53_4/No_Pair	AA16			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 683/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 683 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
4	IO_L54N_4	V15			
4	IO_L54P_4	W15			
4	IO_L55N_4	Y15			
4	IO_L55P_4	AA15			
4	IO_L57N_4	AB15			
4	IO_L57P_4/VREF_4	AA14			
4	IO_L67N_4	AC15			
4	IO_L67P_4	AD15			
4	IO_L69N_4	V14			
4	IO_L69P_4/VREF_4	W14			
4	IO_L74N_4/GCLK3S	AB14			
4	IO_L74P_4/GCLK2P	AC14			
4	IO_L75N_4/GCLK1S	AD14			
4	IO_L75P_4/GCLK0P	AE14			
5	IO_L75N_5/GCLK7S	AE13			
5	IO_L75P_5/GCLK6P	AD13			
5	IO_L74N_5/GCLK5S	AC13			
5	IO_L74P_5/GCLK4P	AB13			
5	IO_L69N_5/VREF_5	W13			
5	IO_L69P_5	V13			
5	IO_L67N_5	AD12			
5	IO_L67P_5	AC12			
5	IO_L57N_5/VREF_5	AA13			
5	IO_L57P_5	AB12			
5	IO_L55N_5	AA12			
5	IO_L55P_5	Y12			
5	IO_L54N_5	W12			
5	IO_L54P_5	V12			
5	IO_L53_5/No_Pair	AA11			
5	IO_L50_5/No_Pair	Y11			
5	IO_L49N_5	AD10			
5	IO_L49P_5	AC10			
5	IO_L48N_5	AB11			
5	IO_L48P_5	AB10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 684 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
5	IO_L46N_5	W11			
5	IO_L46P_5	W10			
5	IO_L45N_5/VREF_5	AD9			
5	IO_L45P_5	AC9			
5	IO_L43N_5	AB9			
5	IO_L43P_5	AA9			
5	IO_L39N_5	Y9			
5	IO_L39P_5	W9			
5	IO_L37N_5	AF8			
5	IO_L37P_5	AE8			
5	IO_L09N_5/VREF_5	AB8			
5	IO_L09P_5	AA8			
5	IO_L07N_5/VREF_5	Y8			
5	IO_L07P_5	W8			
5	IO_L06N_5/VRP_5	AD7			
5	IO_L06P_5/VRN_5	AC7			
5	IO_L05_5/No_Pair	AB7			
5	IO_L03N_5/D4	AA7			
5	IO_L03P_5/D5	Y7			
5	IO_L02N_5/D6	AC6			
5	IO_L02P_5/D7	AB6			
5	IO_L01N_5/RDWR_B	AC5			
5	IO_L01P_5/CS_B	AB5			
6	IO_L01P_6/VRN_6	AE1			
6	IO_L01N_6/VRP_6	AD1			
6	IO_L02P_6	AD2			
6	IO_L02N_6	AC3			
6	IO_L03P_6	AC2			
6	IO_L03N_6/VREF_6	AC1			
6	IO_L05P_6	AB4			
6	IO_L05N_6	AA5			
6	IO_L06P_6	AB2			
6	IO_L06N_6	AB1			
6	IO_L23P_6	AA6	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 685/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 685 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
6	IO_L23N_6	Y6	NC		
6	IO_L24P_6	AA4	NC		
6	IO_L24N_6	AA3	NC		
6	IO_L31P_6	AA2			
6	IO_L31N_6	AA1			
6	IO_L33P_6	Y5			
6	IO_L33N_6/VREF_6	W5			
6	IO_L35P_6	Y4			
6	IO_L35N_6	Y3			
6	IO_L36P_6	Y2			
6	IO_L36N_6	Y1			
6	IO_L37P_6	W7			
6	IO_L37N_6	W6			
6	IO_L39P_6	W2			
6	IO_L39N_6/VREF_6	W1			
6	IO_L41P_6	V8			
6	IO_L41N_6	V7			
6	IO_L42P_6	V6			
6	IO_L42N_6	V5			
6	IO_L43P_6	V4			
6	IO_L43N_6	V3			
6	IO_L45P_6	V2			
6	IO_L45N_6/VREF_6	V1			
6	IO_L47P_6	U8			
6	IO_L47N_6	T8			
6	IO_L48P_6	U5			
6	IO_L48N_6	U4			
6	IO_L49P_6	U3			
6	IO_L49N_6	T3			
6	IO_L51P_6	U2			
6	IO_L51N_6/VREF_6	U1			
6	IO_L53P_6	T7			
6	IO_L53N_6	R7			
6	IO_L54P_6	T6			
6	IO_L54N_6	T5			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 686 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
6	IO_L55P_6	T2			
6	IO_L55N_6	T1			
6	IO_L57P_6	R9			
6	IO_L57N_6/VREF_6	R8			
6	IO_L59P_6	R6			
6	IO_L59N_6	P6			
6	IO_L60P_6	R5			
6	IO_L60N_6	R4			
6	IO_L85P_6	R2			
6	IO_L85N_6	R1			
6	IO_L87P_6	P9			
6	IO_L87N_6/VREF_6	P8			
6	IO_L89P_6	P5			
6	IO_L89N_6	P4			
6	IO_L90P_6	P3			
6	IO_L90N_6	P2			
7	IO_L90P_7	N2			
7	IO_L90N_7	N3			
7	IO_L88P_7	N4			
7	IO_L88N_7/VREF_7	N5			
7	IO_L86P_7	N8			
7	IO_L86N_7	N9			
7	IO_L85P_7	M1			
7	IO_L85N_7	M2			
7	IO_L60P_7	M4			
7	IO_L60N_7	M5			
7	IO_L58P_7	N6			
7	IO_L58N_7/VREF_7	M6			
7	IO_L56P_7	M8			
7	IO_L56N_7	M9			
7	IO_L55P_7	L1			
7	IO_L55N_7	L2			
7	IO_L54P_7	L5			
7	IO_L54N_7	L6			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 687/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 687 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
7	IO_L52P_7	M7			
7	IO_L52N_7/VREF_7	L7			
7	IO_L50P_7	K1			
7	IO_L50N_7	K2			
7	IO_L49P_7	L3			
7	IO_L49N_7	K3			
7	IO_L48P_7	K4			
7	IO_L48N_7	K5			
7	IO_L46P_7	L8			
7	IO_L46N_7/VREF_7	K8			
7	IO_L44P_7	J1			
7	IO_L44N_7	J2			
7	IO_L43P_7	J3			
7	IO_L43N_7	J4			
7	IO_L42P_7	J5			
7	IO_L42N_7	J6			
7	IO_L40P_7	J7			
7	IO_L40N_7/VREF_7	J8			
7	IO_L38P_7	H1			
7	IO_L38N_7	H2			
7	IO_L37P_7	H6			
7	IO_L37N_7	H7			
7	IO_L36P_7	G1			
7	IO_L36N_7	G2			
7	IO_L34P_7	G3			
7	IO_L34N_7/VREF_7	G4			
7	IO_L32P_7	H5			
7	IO_L32N_7	G5			
7	IO_L31P_7	F1			
7	IO_L31N_7	F2			
7	IO_L24P_7	F3	NC		
7	IO_L24N_7	F4	NC		
7	IO_L06P_7	G6			
7	IO_L06N_7	F6			
7	IO_L04P_7	E1			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 688 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
7	IO_L04N_7/VREF_7	E2			
7	IO_L03P_7	F5			
7	IO_L03N_7	E4			
7	IO_L02P_7	D1			
7	IO_L02N_7	D2			
7	IO_L01P_7/VRN_7	C1			
7	IO_L01N_7/VRP_7	C2			
0	VCCO_0	C5			
0	VCCO_0	C8			
0	VCCO_0	D11			
0	VCCO_0	J10			
0	VCCO_0	J11			
0	VCCO_0	K12			
0	VCCO_0	K13			
1	VCCO_1	C19			
1	VCCO_1	C22			
1	VCCO_1	D16			
1	VCCO_1	J16			
1	VCCO_1	J17			
1	VCCO_1	K14			
1	VCCO_1	K15			
2	VCCO_2	E24			
2	VCCO_2	H24			
2	VCCO_2	K18			
2	VCCO_2	L18			
2	VCCO_2	L23			
2	VCCO_2	M17			
2	VCCO_2	N17			
3	VCCO_3	P17			
3	VCCO_3	R17			
3	VCCO_3	T18			
3	VCCO_3	T23			
3	VCCO_3	U18			
3	VCCO_3	W24			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 689/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 689 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
3	VCCO_3	AB24			
4	VCCO_4	U14			
4	VCCO_4	U15			
4	VCCO_4	V16			
4	VCCO_4	V17			
4	VCCO_4	AC16			
4	VCCO_4	AD19			
4	VCCO_4	AD22			
5	VCCO_5	U12			
5	VCCO_5	U13			
5	VCCO_5	V10			
5	VCCO_5	V11			
5	VCCO_5	AC11			
5	VCCO_5	AD5			
5	VCCO_5	AD8			
6	VCCO_6	P10			
6	VCCO_6	R10			
6	VCCO_6	T4			
6	VCCO_6	T9			
6	VCCO_6	U9			
6	VCCO_6	W3			
6	VCCO_6	AB3			
7	VCCO_7	E3			
7	VCCO_7	H3			
7	VCCO_7	K9			
7	VCCO_7	L4			
7	VCCO_7	L9			
7	VCCO_7	M10			
7	VCCO_7	N10			
N/A	PROG_B	B1			
N/A	HSWAP_EN	B3			
N/A	DXP	A3			
N/A	DXN	C4			
N/A	AVCCAUXTX4	B5			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 690 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	VTTXPAD4	B4			
N/A	TXNPAD4	A4			
N/A	TXPPAD4	A5			
N/A	GNDA4	C6			
N/A	RXPPAD4	A6			
N/A	RXNPAD4	A7			
N/A	VTRXPAD4	B6			
N/A	AVCCAUXRX4	B7			
N/A	AVCCAUXTX6	B10			
N/A	VTTXPAD6	B9			
N/A	TXNPAD6	A9			
N/A	TXPPAD6	A10			
N/A	GNDA6	C11			
N/A	RXPPAD6	A11			
N/A	RXNPAD6	A12			
N/A	VTRXPAD6	B11			
N/A	AVCCAUXRX6	B12			
N/A	AVCCAUXTX7	B16			
N/A	VTTXPAD7	B15			
N/A	TXNPAD7	A15			
N/A	TXPPAD7	A16			
N/A	GNDA7	C16			
N/A	RXPPAD7	A17			
N/A	RXNPAD7	A18			
N/A	VTRXPAD7	B17			
N/A	AVCCAUXRX7	B18			
N/A	AVCCAUXTX9	B21			
N/A	VTTXPAD9	B20			
N/A	TXNPAD9	A20			
N/A	TXPPAD9	A21			
N/A	GNDA9	C21			
N/A	RXPPAD9	A22			
N/A	RXNPAD9	A23			
N/A	VTRXPAD9	B22			
N/A	AVCCAUXRX9	B23			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 691/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 691 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	RSVD	C23			
N/A	VBATT	A24			
N/A	TMS	B24			
N/A	TCK	B26			
N/A	TDO	D24			
N/A	CCLK	AE24			
N/A	PWRDWN_B	AF24			
N/A	DONE	AD23			
N/A	AVCCAUXRX16	AE23			
N/A	VTRXPAD16	AE22			
N/A	RXNPAD16	AF23			
N/A	RXPPAD16	AF22			
N/A	GNDA16	AD21			
N/A	TXPPAD16	AF21			
N/A	TXNPAD16	AF20			
N/A	VTTXPAD16	AE20			
N/A	AVCCAUXTX16	AE21			
N/A	AVCCAUXRX18	AE18			
N/A	VTRXPAD18	AE17			
N/A	RXNPAD18	AF18			
N/A	RXPPAD18	AF17			
N/A	GNDA18	AD16			
N/A	TXPPAD18	AF16			
N/A	TXNPAD18	AF15			
N/A	VTTXPAD18	AE15			
N/A	AVCCAUXTX18	AE16			
N/A	AVCCAUXRX19	AE12			
N/A	VTRXPAD19	AE11			
N/A	RXNPAD19	AF12			
N/A	RXPPAD19	AF11			
N/A	GNDA19	AD11			
N/A	TXPPAD19	AF10			
N/A	TXNPAD19	AF9			
N/A	VTTXPAD19	AE9			
N/A	AVCCAUXTX19	AE10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 692 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	AVCCAUXRX21	AE7			
N/A	VTRXPAD21	AE6			
N/A	RXNPAD21	AF7			
N/A	RXPPAD21	AF6			
N/A	GNDA21	AD6			
N/A	TXPPAD21	AF5			
N/A	TXNPAD21	AF4			
N/A	VTTXPAD21	AE4			
N/A	AVCCAUXTX21	AE5			
N/A	M2	AD4			
N/A	M0	AF3			
N/A	M1	AE3			
N/A	TDI	D3			
N/A	VCCINT	G10			
N/A	VCCINT	G13			
N/A	VCCINT	G14			
N/A	VCCINT	G17			
N/A	VCCINT	J9			
N/A	VCCINT	J18			
N/A	VCCINT	K7			
N/A	VCCINT	K10			
N/A	VCCINT	K11			
N/A	VCCINT	K16			
N/A	VCCINT	K17			
N/A	VCCINT	K20			
N/A	VCCINT	L10			
N/A	VCCINT	L17			
N/A	VCCINT	N7			
N/A	VCCINT	N20			
N/A	VCCINT	P7			
N/A	VCCINT	P20			
N/A	VCCINT	T10			
N/A	VCCINT	T17			
N/A	VCCINT	U7			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 693/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 693 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	VCCINT	U10			
N/A	VCCINT	U11			
N/A	VCCINT	U16			
N/A	VCCINT	U17			
N/A	VCCINT	U20			
N/A	VCCINT	V9			
N/A	VCCINT	V18			
N/A	VCCINT	Y10			
N/A	VCCINT	Y13			
N/A	VCCINT	Y14			
N/A	VCCINT	Y17			
N/A	VCCAUX	A2			
N/A	VCCAUX	A13			
N/A	VCCAUX	A14			
N/A	VCCAUX	A25			
N/A	VCCAUX	N1			
N/A	VCCAUX	N26			
N/A	VCCAUX	P1			
N/A	VCCAUX	P26			
N/A	VCCAUX	AF2			
N/A	VCCAUX	AF13			
N/A	VCCAUX	AF14			
N/A	VCCAUX	AF25			
N/A	GND	A1			
N/A	GND	A26			
N/A	GND	B2			
N/A	GND	B25			
N/A	GND	C3			
N/A	GND	C24			
N/A	GND	D4			
N/A	GND	D8			
N/A	GND	D19			
N/A	GND	D23			
N/A	GND	F10			
N/A	GND	F17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 694 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	GND	H4			
N/A	GND	H23			
N/A	GND	K6			
N/A	GND	K21			
N/A	GND	L11			
N/A	GND	L12			
N/A	GND	L13			
N/A	GND	L14			
N/A	GND	L15			
N/A	GND	L16			
N/A	GND	M3			
N/A	GND	M11			
N/A	GND	M12			
N/A	GND	M13			
N/A	GND	M14			
N/A	GND	M15			
N/A	GND	M16			
N/A	GND	M24			
N/A	GND	N11			
N/A	GND	N12			
N/A	GND	N13			
N/A	GND	N14			
N/A	GND	N15			
N/A	GND	N16			
N/A	GND	P11			
N/A	GND	P12			
N/A	GND	P13			
N/A	GND	P14			
N/A	GND	P15			
N/A	GND	P16			
N/A	GND	R3			
N/A	GND	R11			
N/A	GND	R12			
N/A	GND	R13			
N/A	GND	R14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 695/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 695 of 947

Table 7: **FG676 — XC2VP20, XC2VP30, and XC2VP40**


Bank	Pin Description	Pin Number	No Connects		
			XC2VP20	XC2VP30	XC2VP40
N/A	GND	R15			
N/A	GND	R16			
N/A	GND	R24			
N/A	GND	T11			
N/A	GND	T12			
N/A	GND	T13			
N/A	GND	T14			
N/A	GND	T15			
N/A	GND	T16			
N/A	GND	U6			
N/A	GND	U21			
N/A	GND	W4			
N/A	GND	W23			
N/A	GND	AA10			
N/A	GND	AA17			
N/A	GND	AC4			
N/A	GND	AC8			
N/A	GND	AC19			
N/A	GND	AC23			
N/A	GND	AD3			
N/A	GND	AD24			
N/A	GND	AE2			
N/A	GND	AE25			
N/A	GND	AF1			
N/A	GND	AF26			

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 696 of 947

FG676 Fine-Pitch BGA Package Specifications (1.00mm pitch)

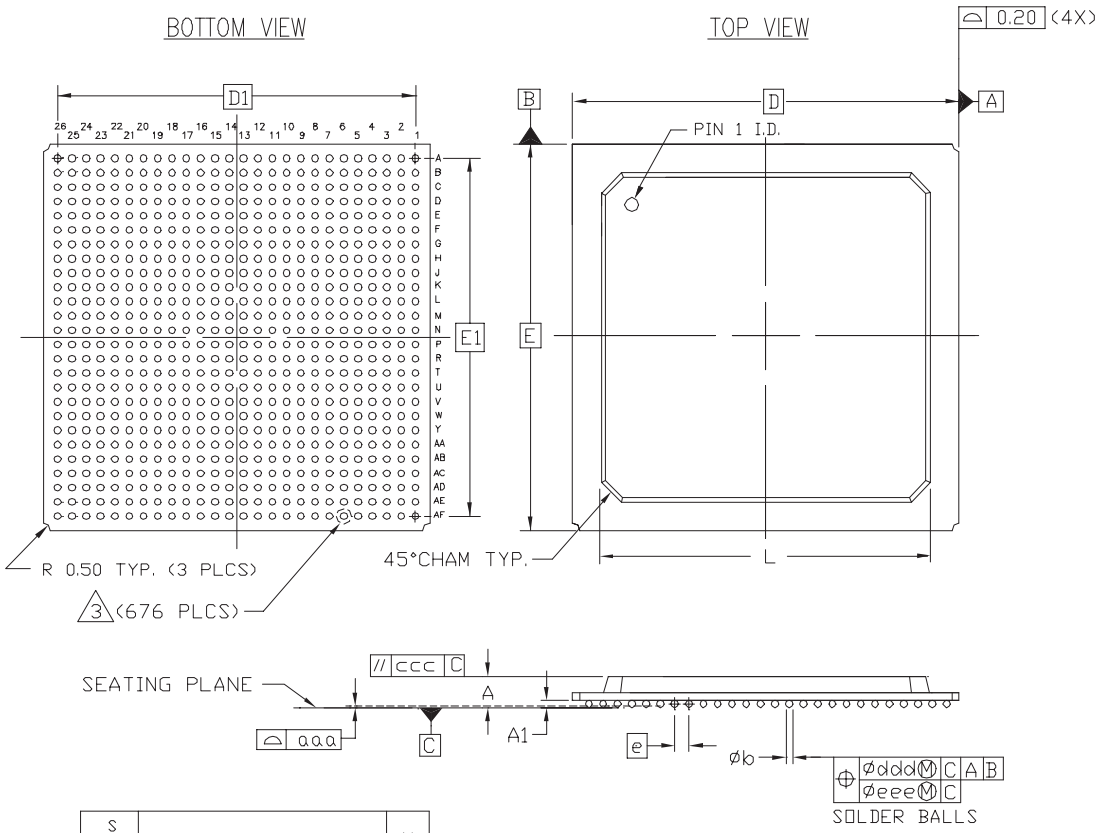

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A	---	2.25	2.60	
A_1	0.40	0.50	0.60	
D/E	27.00 BSC			
D_1/E_1	25.00 REF			
e	1.00 BSC			
øb	0.50	0.60	0.70	
aaa	---	---	0.20	
ccc	---	---	0.35	
ddd	---	---	0.30	
eee	---	---	0.10	
L	---	---	25.70	
M	26			2
REF.	JEDEC MS-034-AAL-1			

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. LAND PAD OPENING – SOLDER MASK DEFINED ø0.485mm (0.019")

Figure 3: **FG676 Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 697/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 697 of 947

FF672 Flip-Chip Fine-Pitch BGA Package

As shown in Table 8, XC2VP2, XC2VP4, and XC2VP7 Virtex-II Pro devices are available in the FF672 flip-chip fine-pitch BGA package. Pins in each of these devices are the same, except for differences shown in the "No Connects" column. Following this table are the FF672 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
0	IO_L01N_0/VRP_0	B24			
0	IO_L01P_0/VRN_0	A24			
0	IO_L02N_0	D21			
0	IO_L02P_0	C21			
0	IO_L03N_0	E20			
0	IO_L03P_0/VREF_0	D20			
0	IO_L05_0/No_Pair	F19			
0	IO_L06N_0	E19			
0	IO_L06P_0	E18			
0	IO_L07N_0	D19			
0	IO_L07P_0	C19			
0	IO_L08N_0	B19			
0	IO_L08P_0	A19			
0	IO_L09N_0	G18			
0	IO_L09P_0/VREF_0	F18			
0	IO_L37N_0	D18	NC	NC	
0	IO_L37P_0	C18	NC	NC	
0	IO_L38N_0	G17	NC	NC	
0	IO_L38P_0	H16	NC	NC	
0	IO_L39N_0	F17	NC	NC	
0	IO_L39P_0	F16	NC	NC	
0	IO_L43N_0	E17	NC	NC	
0	IO_L43P_0	D17	NC	NC	
0	IO_L44N_0	G16	NC	NC	
0	IO_L44P_0	G15	NC	NC	
0	IO_L45N_0	E16	NC	NC	
0	IO_L45P_0/VREF_0	D16	NC	NC	
0	IO_L67N_0	F15			
0	IO_L67P_0	E15			
0	IO_L68N_0	D15			
0	IO_L68P_0	C15			
0	IO_L69N_0	H15			
0	IO_L69P_0/VREF_0	H14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 698 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
0	IO_L73N_0	G14			
0	IO_L73P_0	F14			
0	IO_L74N_0/GCLK7P	E14			
0	IO_L74P_0/GCLK6S	D14			
0	IO_L75N_0/GCLK5P	C14			
0	IO_L75P_0/GCLK4S	B14			
1	IO_L75N_1/GCLK3P	B13			
1	IO_L75P_1/GCLK2S	C13			
1	IO_L74N_1/GCLK1P	D13			
1	IO_L74P_1/GCLK0S	E13			
1	IO_L73N_1	F13			
1	IO_L73P_1	G13			
1	IO_L69N_1/VREF_1	H13			
1	IO_L69P_1	H12			
1	IO_L68N_1	C12			
1	IO_L68P_1	D12			
1	IO_L67N_1	E12			
1	IO_L67P_1	F12			
1	IO_L45N_1/VREF_1	D11	NC	NC	
1	IO_L45P_1	E11	NC	NC	
1	IO_L44N_1	G12	NC	NC	
1	IO_L44P_1	G11	NC	NC	
1	IO_L43N_1	D10	NC	NC	
1	IO_L43P_1	E10	NC	NC	
1	IO_L39N_1	F11	NC	NC	
1	IO_L39P_1	F10	NC	NC	
1	IO_L38N_1	H11	NC	NC	
1	IO_L38P_1	G10	NC	NC	
1	IO_L37N_1	C9	NC	NC	
1	IO_L37P_1	D9	NC	NC	
1	IO_L09N_1/VREF_1	F9			
1	IO_L09P_1	G9			
1	IO_L08N_1	A8			
1	IO_L08P_1	B8			
1	IO_L07N_1	C8			
1	IO_L07P_1	D8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 699/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 699 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
1	IO_L06N_1	E9			
1	IO_L06P_1	E8			
1	IO_L05_1/No_Pair	F8			
1	IO_L03N_1/VREF_1	D7			
1	IO_L03P_1	E7			
1	IO_L02N_1	C6			
1	IO_L02P_1	D6			
1	IO_L01N_1/VRP_1	A3			
1	IO_L01P_1/VRN_1	B3			
2	IO_L01N_2/VRP_2	C4			
2	IO_L01P_2/VRN_2	D3			
2	IO_L02N_2	A2			
2	IO_L02P_2	B1			
2	IO_L03N_2	C2			
2	IO_L03P_2	C1			
2	IO_L04N_2/VREF_2	D2			
2	IO_L04P_2	D1			
2	IO_L05N_2	E4			
2	IO_L05P_2	E3			
2	IO_L06N_2	E2			
2	IO_L06P_2	E1			
2	IO_L40N_2/VREF_2	F5	NC	NC	NC
2	IO_L40P_2	F4	NC	NC	NC
2	IO_L42N_2	F3	NC	NC	NC
2	IO_L42P_2	F2	NC	NC	NC
2	IO_L43N_2	G6	NC		
2	IO_L43P_2	G5	NC		
2	IO_L44N_2	G4	NC		
2	IO_L44P_2	G3	NC		
2	IO_L45N_2	F1	NC		
2	IO_L45P_2	G1	NC		
2	IO_L46N_2/VREF_2	H6	NC		
2	IO_L46P_2	H5	NC		
2	IO_L47N_2	H4	NC		
2	IO_L47P_2	H3	NC		
2	IO_L48N_2	H2	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 700 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
2	IO_L48P_2	H1	NC		
2	IO_L49N_2	J7	NC		
2	IO_L49P_2	J6	NC		
2	IO_L50N_2	J5	NC		
2	IO_L50P_2	J4	NC		
2	IO_L51N_2	J3	NC		
2	IO_L51P_2	J2	NC		
2	IO_L52N_2/VREF_2	K6	NC		
2	IO_L52P_2	K5	NC		
2	IO_L53N_2	K4	NC		
2	IO_L53P_2	K3	NC		
2	IO_L54N_2	J1	NC		
2	IO_L54P_2	K1	NC		
2	IO_L55N_2	K7	NC		
2	IO_L55P_2	L8	NC		
2	IO_L56N_2	L7	NC		
2	IO_L56P_2	M7	NC		
2	IO_L57N_2	L6	NC		
2	IO_L57P_2	L5	NC		
2	IO_L58N_2/VREF_2	L4	NC		
2	IO_L58P_2	L3	NC		
2	IO_L59N_2	L2	NC		
2	IO_L59P_2	L1	NC		
2	IO_L60N_2	M8	NC		
2	IO_L60P_2	N8	NC		
2	IO_L85N_2	M6			
2	IO_L85P_2	M5			
2	IO_L86N_2	M4			
2	IO_L86P_2	M3			
2	IO_L87N_2	M2			
2	IO_L87P_2	M1			
2	IO_L88N_2/VREF_2	N7			
2	IO_L88P_2	N6			
2	IO_L89N_2	N5			
2	IO_L89P_2	N4			
2	IO_L90N_2	N3			
2	IO_L90P_2	N2			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 701/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 701 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
3	IO_L90N_3	P2			
3	IO_L90P_3	P3			
3	IO_L89N_3	P4			
3	IO_L89P_3	P5			
3	IO_L88N_3	P6			
3	IO_L88P_3	P7			
3	IO_L87N_3/VREF_3	R1			
3	IO_L87P_3	R2			
3	IO_L86N_3	R3			
3	IO_L86P_3	R4			
3	IO_L85N_3	R5			
3	IO_L85P_3	R6			
3	IO_L60N_3	P8	NC		
3	IO_L60P_3	R8	NC		
3	IO_L59N_3	T1	NC		
3	IO_L59P_3	T2	NC		
3	IO_L58N_3	T3	NC		
3	IO_L58P_3	T4	NC		
3	IO_L57N_3/VREF_3	T5	NC		
3	IO_L57P_3	T6	NC		
3	IO_L56N_3	R7	NC		
3	IO_L56P_3	T7	NC		
3	IO_L55N_3	T8	NC		
3	IO_L55P_3	U7	NC		
3	IO_L54N_3	U1	NC		
3	IO_L54P_3	V1	NC		
3	IO_L53N_3	U3	NC		
3	IO_L53P_3	U4	NC		
3	IO_L52N_3	U5	NC		
3	IO_L52P_3	U6	NC		
3	IO_L51N_3/VREF_3	V2	NC		
3	IO_L51P_3	V3	NC		
3	IO_L50N_3	V4	NC		
3	IO_L50P_3	V5	NC		
3	IO_L49N_3	V6	NC		
3	IO_L49P_3	V7	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 702 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
3	IO_L48N_3	W1	NC		
3	IO_L48P_3	W2	NC		
3	IO_L47N_3	W3	NC		
3	IO_L47P_3	W4	NC		
3	IO_L46N_3	W5	NC		
3	IO_L46P_3	W6	NC		
3	IO_L45N_3/VREF_3	Y1	NC		
3	IO_L45P_3	AA1	NC		
3	IO_L44N_3	Y3	NC		
3	IO_L44P_3	Y4	NC		
3	IO_L43N_3	Y5	NC		
3	IO_L43P_3	Y6	NC		
3	IO_L42N_3	AA2	NC	NC	NC
3	IO_L42P_3	AA3	NC	NC	NC
3	IO_L41N_3	AA4	NC	NC	NC
3	IO_L41P_3	AA5	NC	NC	NC
3	IO_L39N_3/VREF_3	AB1	NC	NC	NC
3	IO_L39P_3	AB2	NC	NC	NC
3	IO_L06N_3	AB3			
3	IO_L06P_3	AB4			
3	IO_L05N_3	AC1			
3	IO_L05P_3	AC2			
3	IO_L04N_3	AD1			
3	IO_L04P_3	AD2			
3	IO_L03N_3/VREF_3	AE1			
3	IO_L03P_3	AF2			
3	IO_L02N_3	AC3			
3	IO_L02P_3	AD4			
3	IO_L01N_3/VRP_3	AE3			
3	IO_L01P_3/VRN_3	AF3			
4	IO_L01N_4/BUSY/DOUT(1)	AC6			
4	IO_L01P_4/INIT_B	AD6			
4	IO_L02N_4/D0/DIN(1)	AB7			
4	IO_L02P_4/D1	AC7			
4	IO_L03N_4/D2	AA7			
4	IO_L03P_4/D3	AA8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 703/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 703 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
4	IO_L05_4/No_Pair	Y8			
4	IO_L06N_4/VRP_4	AB8			
4	IO_L06P_4/VRN_4	AB9			
4	IO_L07N_4	AC8			
4	IO_L07P_4/VREF_4	AD8			
4	IO_L08N_4	AE8			
4	IO_L08P_4	AF8			
4	IO_L09N_4	Y9			
4	IO_L09P_4/VREF_4	AA9			
4	IO_L37N_4	AC9	NC	NC	
4	IO_L37P_4	AD9	NC	NC	
4	IO_L38N_4	Y10	NC	NC	
4	IO_L38P_4	W11	NC	NC	
4	IO_L39N_4	AA10	NC	NC	
4	IO_L39P_4	AA11	NC	NC	
4	IO_L43N_4	AB10	NC	NC	
4	IO_L43P_4	AC10	NC	NC	
4	IO_L44N_4	Y11	NC	NC	
4	IO_L44P_4	Y12	NC	NC	
4	IO_L45N_4	AB11	NC	NC	
4	IO_L45P_4/VREF_4	AC11	NC	NC	
4	IO_L67N_4	AA12			
4	IO_L67P_4	AB12			
4	IO_L68N_4	AC12			
4	IO_L68P_4	AD12			
4	IO_L69N_4	W12			
4	IO_L69P_4/VREF_4	W13			
4	IO_L73N_4	Y13			
4	IO_L73P_4	AA13			
4	IO_L74N_4/GCLK3S	AB13			
4	IO_L74P_4/GCLK2P	AC13			
4	IO_L75N_4/GCLK1S	AD13			
4	IO_L75P_4/GCLK0P	AE13			
5	IO_L75N_5/GCLK7S	AE14			
5	IO_L75P_5/GCLK6P	AD14			
5	IO_L74N_5/GCLK5S	AC14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 704 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
5	IO_L74P_5/GCLK4P	AB14			
5	IO_L73N_5	AA14			
5	IO_L73P_5	Y14			
5	IO_L69N_5/VREF_5	W14			
5	IO_L69P_5	W15			
5	IO_L68N_5	AD15			
5	IO_L68P_5	AC15			
5	IO_L67N_5	AB15			
5	IO_L67P_5	AA15			
5	IO_L45N_5/VREF_5	AC16	NC	NC	
5	IO_L45P_5	AB16	NC	NC	
5	IO_L44N_5	Y15	NC	NC	
5	IO_L44P_5	Y16	NC	NC	
5	IO_L43N_5	AC17	NC	NC	
5	IO_L43P_5	AB17	NC	NC	
5	IO_L39N_5	AA16	NC	NC	
5	IO_L39P_5	AA17	NC	NC	
5	IO_L38N_5	W16	NC	NC	
5	IO_L38P_5	Y17	NC	NC	
5	IO_L37N_5	AD18	NC	NC	
5	IO_L37P_5	AC18	NC	NC	
5	IO_L09N_5/VREF_5	AA18			
5	IO_L09P_5	Y18			
5	IO_L08N_5	AF19			
5	IO_L08P_5	AE19			
5	IO_L07N_5/VREF_5	AD19			
5	IO_L07P_5	AC19			
5	IO_L06N_5/VRP_5	AB18			
5	IO_L06P_5/VRN_5	AB19			
5	IO_L05_5/No_Pair	Y19			
5	IO_L03N_5/D4	AA19			
5	IO_L03P_5/D5	AA20			
5	IO_L02N_5/D6	AC20			
5	IO_L02P_5/D7	AB20			
5	IO_L01N_5/RDWR_B	AD21			
5	IO_L01P_5/CS_B	AC21			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 705/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 705 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
6	IO_L01P_6/VRN_6	AF24			
6	IO_L01N_6/VRP_6	AE24			
6	IO_L02P_6	AD23			
6	IO_L02N_6	AC24			
6	IO_L03P_6	AE26			
6	IO_L03N_6/VREF_6	AF25			
6	IO_L04P_6	AD25			
6	IO_L04N_6	AD26			
6	IO_L05P_6	AC25			
6	IO_L05N_6	AC26			
6	IO_L06P_6	AB23			
6	IO_L06N_6	AB24			
6	IO_L39P_6	AB25	NC	NC	NC
6	IO_L39N_6/VREF_6	AB26	NC	NC	NC
6	IO_L41P_6	AA22	NC	NC	NC
6	IO_L41N_6	AA23	NC	NC	NC
6	IO_L42P_6	AA24	NC	NC	NC
6	IO_L42N_6	AA25	NC	NC	NC
6	IO_L43P_6	Y21	NC		
6	IO_L43N_6	Y22	NC		
6	IO_L44P_6	Y23	NC		
6	IO_L44N_6	Y24	NC		
6	IO_L45P_6	AA26	NC		
6	IO_L45N_6/VREF_6	Y26	NC		
6	IO_L46P_6	W21	NC		
6	IO_L46N_6	W22	NC		
6	IO_L47P_6	W23	NC		
6	IO_L47N_6	W24	NC		
6	IO_L48P_6	W25	NC		
6	IO_L48N_6	W26	NC		
6	IO_L49P_6	V20	NC		
6	IO_L49N_6	V21	NC		
6	IO_L50P_6	V22	NC		
6	IO_L50N_6	V23	NC		
6	IO_L51P_6	V24	NC		
6	IO_L51N_6/VREF_6	V25	NC		
6	IO_L52P_6	U21	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 706 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
6	IO_L52N_6	U22	NC		
6	IO_L53P_6	U23	NC		
6	IO_L53N_6	U24	NC		
6	IO_L54P_6	V26	NC		
6	IO_L54N_6	U26	NC		
6	IO_L55P_6	U20	NC		
6	IO_L55N_6	T19	NC		
6	IO_L56P_6	T20	NC		
6	IO_L56N_6	R20	NC		
6	IO_L57P_6	T21	NC		
6	IO_L57N_6/VREF_6	T22	NC		
6	IO_L58P_6	T23	NC		
6	IO_L58N_6	T24	NC		
6	IO_L59P_6	T25	NC		
6	IO_L59N_6	T26	NC		
6	IO_L60P_6	R19	NC		
6	IO_L60N_6	P19	NC		
6	IO_L85P_6	R21			
6	IO_L85N_6	R22			
6	IO_L86P_6	R23			
6	IO_L86N_6	R24			
6	IO_L87P_6	R25			
6	IO_L87N_6/VREF_6	R26			
6	IO_L88P_6	P20			
6	IO_L88N_6	P21			
6	IO_L89P_6	P22			
6	IO_L89N_6	P23			
6	IO_L90P_6	P24			
6	IO_L90N_6	P25			
7	IO_L90P_7	N25			
7	IO_L90N_7	N24			
7	IO_L89P_7	N23			
7	IO_L89N_7	N22			
7	IO_L88P_7	N21			
7	IO_L88N_7/VREF_7	N20			
7	IO_L87P_7	M26			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 707/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 707 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
7	IO_L87N_7	M25			
7	IO_L86P_7	M24			
7	IO_L86N_7	M23			
7	IO_L85P_7	M22			
7	IO_L85N_7	M21			
7	IO_L60P_7	N19	NC		
7	IO_L60N_7	M19	NC		
7	IO_L59P_7	L26	NC		
7	IO_L59N_7	L25	NC		
7	IO_L58P_7	L24	NC		
7	IO_L58N_7/VREF_7	L23	NC		
7	IO_L57P_7	L22	NC		
7	IO_L57N_7	L21	NC		
7	IO_L56P_7	M20	NC		
7	IO_L56N_7	L20	NC		
7	IO_L55P_7	L19	NC		
7	IO_L55N_7	K20	NC		
7	IO_L54P_7	K26	NC		
7	IO_L54N_7	J26	NC		
7	IO_L53P_7	K24	NC		
7	IO_L53N_7	K23	NC		
7	IO_L52P_7	K22	NC		
7	IO_L52N_7/VREF_7	K21	NC		
7	IO_L51P_7	J25	NC		
7	IO_L51N_7	J24	NC		
7	IO_L50P_7	J23	NC		
7	IO_L50N_7	J22	NC		
7	IO_L49P_7	J21	NC		
7	IO_L49N_7	J20	NC		
7	IO_L48P_7	H26	NC		
7	IO_L48N_7	H25	NC		
7	IO_L47P_7	H24	NC		
7	IO_L47N_7	H23	NC		
7	IO_L46P_7	H22	NC		
7	IO_L46N_7/VREF_7	H21	NC		
7	IO_L45P_7	G26	NC		
7	IO_L45N_7	F26	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 708 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
7	IO_L44P_7	G24	NC		
7	IO_L44N_7	G23	NC		
7	IO_L43P_7	G22	NC		
7	IO_L43N_7	G21	NC		
7	IO_L42P_7	F25	NC	NC	NC
7	IO_L42N_7	F24	NC	NC	NC
7	IO_L40P_7	F23	NC	NC	NC
7	IO_L40N_7/VREF_7	F22	NC	NC	NC
7	IO_L06P_7	E26			
7	IO_L06N_7	E25			
7	IO_L05P_7	E24			
7	IO_L05N_7	E23			
7	IO_L04P_7	D26			
7	IO_L04N_7/VREF_7	D25			
7	IO_L03P_7	C26			
7	IO_L03N_7	C25			
7	IO_L02P_7	B26			
7	IO_L02N_7	A25			
7	IO_L01P_7/VRN_7	D24			
7	IO_L01N_7/VRP_7	C23			
0	VCCO_0	C17			
0	VCCO_0	C20			
0	VCCO_0	H17			
0	VCCO_0	H18			
0	VCCO_0	J14			
0	VCCO_0	J15			
0	VCCO_0	J16			
1	VCCO_1	C7			
1	VCCO_1	H9			
1	VCCO_1	C10			
1	VCCO_1	H10			
1	VCCO_1	J11			
1	VCCO_1	J12			
1	VCCO_1	J13			
2	VCCO_2	G2			
2	VCCO_2	J8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 709/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 709 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
2	VCCO_2	K2			
2	VCCO_2	K8			
2	VCCO_2	L9			
2	VCCO_2	M9			
2	VCCO_2	N9			
3	VCCO_3	P9			
3	VCCO_3	R9			
3	VCCO_3	T9			
3	VCCO_3	U2			
3	VCCO_3	U8			
3	VCCO_3	V8			
3	VCCO_3	Y2			
4	VCCO_4	W9			
4	VCCO_4	AD7			
4	VCCO_4	V11			
4	VCCO_4	V12			
4	VCCO_4	V13			
4	VCCO_4	W10			
4	VCCO_4	AD10			
5	VCCO_5	V14			
5	VCCO_5	V15			
5	VCCO_5	V16			
5	VCCO_5	W17			
5	VCCO_5	W18			
5	VCCO_5	AD17			
5	VCCO_5	AD20			
6	VCCO_6	P18			
6	VCCO_6	R18			
6	VCCO_6	T18			
6	VCCO_6	U19			
6	VCCO_6	U25			
6	VCCO_6	V19			
6	VCCO_6	Y25			
7	VCCO_7	G25			
7	VCCO_7	J19			
7	VCCO_7	K19			
7	VCCO_7	K25			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 710 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
7	VCCO_7	L18			
7	VCCO_7	M18			
7	VCCO_7	N18			
N/A	CCLK	W7			
N/A	PROG_B	D22			
N/A	DONE	AB6			
N/A	M0	AC22			
N/A	M1	W20			
N/A	M2	AB21			
N/A	TCK	G8			
N/A	TDI	H20			
N/A	TDO	H7			
N/A	TMS	F7			
N/A	PWRDWN_B	AC5			
N/A	HSWAP_EN	E21			
N/A	RSVD	D5			
N/A	VBATT	E6			
N/A	DXP	F20			
N/A	DXN	G19			
N/A	AVCCAUXTX7	B11			
N/A	VTTXPAD7	B12			
N/A	TXNPAD7	A12			
N/A	TXPPAD7	A11			
N/A	GNDA7	C11			
N/A	RXPPAD7	A10			
N/A	RXNPAD7	A9			
N/A	VTRXPAD7	B10			
N/A	AVCCAUXRX7	B9			
N/A	AVCCAUXTX9	B6	NC	NC	
N/A	VTTXPAD9	B7	NC	NC	
N/A	TXNPAD9	A7	NC	NC	
N/A	TXPPAD9	A6	NC	NC	
N/A	GNDA9	C5	NC	NC	
N/A	RXPPAD9	A5	NC	NC	
N/A	RXNPAD9	A4	NC	NC	
N/A	VTRXPAD9	B5	NC	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 711/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 711 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	AVCCAUXRX9	B4	NC	NC	
N/A	AVCCAUXRX16	AE4	NC	NC	
N/A	VTRXPAD16	AE5	NC	NC	
N/A	RXNPAD16	AF4	NC	NC	
N/A	RXPPAD16	AF5	NC	NC	
N/A	GNDA16	AD5	NC	NC	
N/A	TXPPAD16	AF6	NC	NC	
N/A	TXNPAD16	AF7	NC	NC	
N/A	VTTXPAD16	AE7	NC	NC	
N/A	AVCCAUXTX16	AE6	NC	NC	
N/A	AVCCAUXRX18	AE9			
N/A	VTRXPAD18	AE10			
N/A	RXNPAD18	AF9			
N/A	RXPPAD18	AF10			
N/A	GNDA18	AD11			
N/A	TXPPAD18	AF11			
N/A	TXNPAD18	AF12			
N/A	VTTXPAD18	AE12			
N/A	AVCCAUXTX18	AE11			
N/A	AVCCAUXTX4	B22	NC	NC	
N/A	VTTXPAD4	B23	NC	NC	
N/A	TXNPAD4	A23	NC	NC	
N/A	TXPPAD4	A22	NC	NC	
N/A	GNDA4	C22	NC	NC	
N/A	RXPPAD4	A21	NC	NC	
N/A	RXNPAD4	A20	NC	NC	
N/A	VTRXPAD4	B21	NC	NC	
N/A	AVCCAUXRX4	B20	NC	NC	
N/A	AVCCAUXTX6	B17			
N/A	VTTXPAD6	B18			
N/A	TXNPAD6	A18			
N/A	TXPPAD6	A17			
N/A	GNDA6	C16			
N/A	RXPPAD6	A16			
N/A	RXNPAD6	A15			
N/A	VTRXPAD6	B16			
N/A	AVCCAUXRX6	B15			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 712 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	AVCCAUXRX19	AE15			
N/A	VTRXPAD19	AE16			
N/A	RXNPAD19	AF15			
N/A	RXPPAD19	AF16			
N/A	GNDA19	AD16			
N/A	TXPPAD19	AF17			
N/A	TXNPAD19	AF18			
N/A	VTTXPAD19	AE18			
N/A	AVCCAUXTX19	AE17			
N/A	AVCCAUXRX21	AE20	NC	NC	
N/A	VTRXPAD21	AE21	NC	NC	
N/A	RXNPAD21	AF20	NC	NC	
N/A	RXPPAD21	AF21	NC	NC	
N/A	GNDA21	AD22	NC	NC	
N/A	TXPPAD21	AF22	NC	NC	
N/A	TXNPAD21	AF23	NC	NC	
N/A	VTTXPAD21	AE23	NC	NC	
N/A	AVCCAUXTX21	AE22	NC	NC	
N/A	VCCINT	H8			
N/A	VCCINT	J9			
N/A	VCCINT	K9			
N/A	VCCINT	U9			
N/A	VCCINT	V9			
N/A	VCCINT	W8			
N/A	VCCINT	H19			
N/A	VCCINT	J10			
N/A	VCCINT	J17			
N/A	VCCINT	J18			
N/A	VCCINT	K11			
N/A	VCCINT	K16			
N/A	VCCINT	K18			
N/A	VCCINT	L10			
N/A	VCCINT	L17			
N/A	VCCINT	T10			
N/A	VCCINT	T17			
N/A	VCCINT	U11			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 713/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 713 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	VCCINT	U16			
N/A	VCCINT	U18			
N/A	VCCINT	V10			
N/A	VCCINT	V17			
N/A	VCCINT	V18			
N/A	VCCINT	W19			
N/A	VCCAUX	B2			
N/A	VCCAUX	N1			
N/A	VCCAUX	P1			
N/A	VCCAUX	A13			
N/A	VCCAUX	A14			
N/A	VCCAUX	AE2			
N/A	VCCAUX	B25			
N/A	VCCAUX	N26			
N/A	VCCAUX	P26			
N/A	VCCAUX	AE25			
N/A	VCCAUX	AF13			
N/A	VCCAUX	AF14			
N/A	GND	C3			
N/A	GND	D4			
N/A	GND	E5			
N/A	GND	F6			
N/A	GND	G7			
N/A	GND	Y7			
N/A	GND	AA6			
N/A	GND	AB5			
N/A	GND	AC4			
N/A	GND	AD3			
N/A	GND	C24			
N/A	GND	D23			
N/A	GND	E22			
N/A	GND	F21			
N/A	GND	G20			
N/A	GND	K10			
N/A	GND	K12			
N/A	GND	K13			
N/A	GND	K14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 714 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	GND	K15			
N/A	GND	K17			
N/A	GND	L11			
N/A	GND	L12			
N/A	GND	L13			
N/A	GND	L14			
N/A	GND	L15			
N/A	GND	L16			
N/A	GND	M10			
N/A	GND	M11			
N/A	GND	M12			
N/A	GND	M13			
N/A	GND	M14			
N/A	GND	M15			
N/A	GND	M16			
N/A	GND	M17			
N/A	GND	N10			
N/A	GND	N11			
N/A	GND	N12			
N/A	GND	N13			
N/A	GND	N14			
N/A	GND	N15			
N/A	GND	N16			
N/A	GND	N17			
N/A	GND	P10			
N/A	GND	P11			
N/A	GND	P12			
N/A	GND	P13			
N/A	GND	P14			
N/A	GND	P15			
N/A	GND	P16			
N/A	GND	P17			
N/A	GND	R10			
N/A	GND	R11			
N/A	GND	R12			
N/A	GND	R13			
N/A	GND	R14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 715/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 715 of 947

Table 8: **FF672 — XC2VP2, XC2VP4, and XC2VP7**


Bank	Pin Description	Pin Number	No Connects		
			XC2VP2	XC2VP4	XC2VP7
N/A	GND	R15			
N/A	GND	R16			
N/A	GND	R17			
N/A	GND	T11			
N/A	GND	T12			
N/A	GND	T13			
N/A	GND	T14			
N/A	GND	T15			
N/A	GND	T16			
N/A	GND	U10			
N/A	GND	U12			
N/A	GND	U13			
N/A	GND	U14			
N/A	GND	U15			
N/A	GND	U17			
N/A	GND	Y20			
N/A	GND	AA21			
N/A	GND	AB22			
N/A	GND	AC23			
N/A	GND	AD24			

Notes:
1. See Table 4 for an explanation of the signals available on this pin.


Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 716 of 947

FF672 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

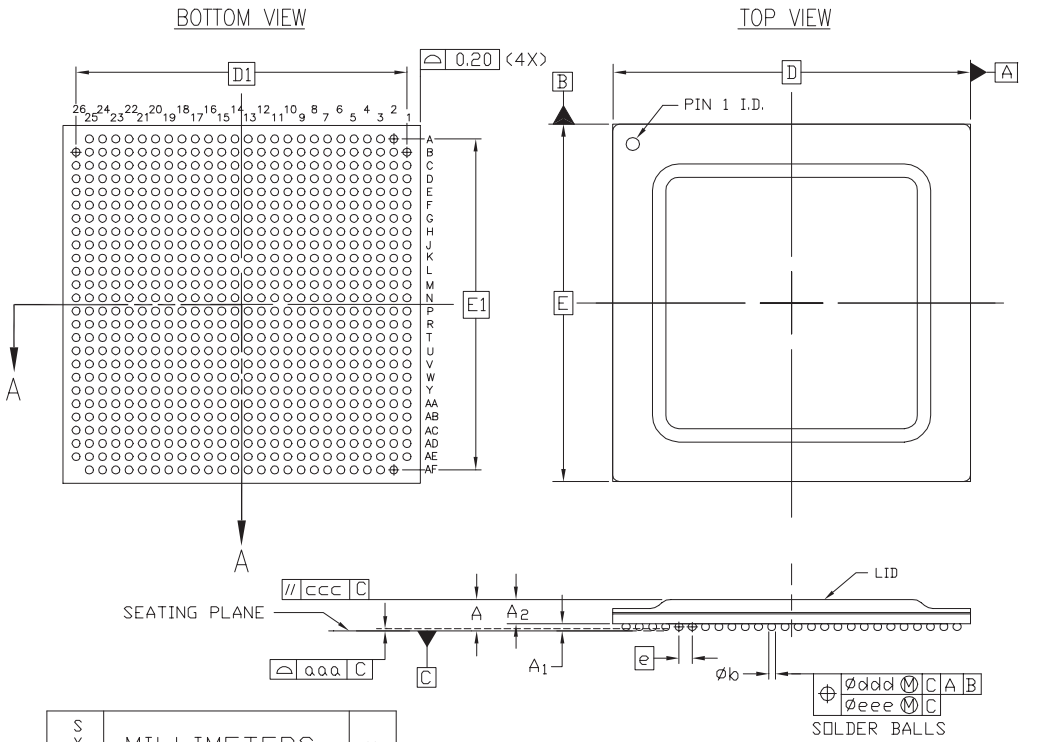

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		2.45	2.65	
A_1	0.40	0.50	0.60	
A_2			2.15	
D/E	27.00 BASIC			
D_1/E_1	25.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	26			2



SECTION A–A
(NOT TO SCALE)

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAL–1 (DEPOPULATED)

Figure 4: **FF672 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 717/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 717 of 947

FF896 Flip-Chip Fine-Pitch BGA Package

As shown in Table 9, XC2VP7, XC2VP20, and XC2VP30 Virtex-II Pro devices are available in the FF896 flip-chip fine-pitch BGA package. Pins in each of these devices are the same, except for differences shown in the "No Connects" column. Following this table are the FF896 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
0	IO_L01N_0/VRP_0	E25			
0	IO_L01P_0/VRN_0	E24			
0	IO_L02N_0	F24			
0	IO_L02P_0	F23			
0	IO_L03N_0	E23			
0	IO_L03P_0/VREF_0	E22			
0	IO_L05_0/No_Pair	G23			
0	IO_L06N_0	H22			
0	IO_L06P_0	G22			
0	IO_L07N_0	F22			
0	IO_L07P_0	F21			
0	IO_L08N_0	D24			
0	IO_L08P_0	C24			
0	IO_L09N_0	H21			
0	IO_L09P_0/VREF_0	G21			
0	IO_L37N_0	E21			
0	IO_L37P_0	D21			
0	IO_L38N_0	D23			
0	IO_L38P_0	C23			
0	IO_L39N_0	H20			
0	IO_L39P_0	G20			
0	IO_L43N_0	E20			
0	IO_L43P_0	D20			
0	IO_L44N_0	B23			
0	IO_L44P_0	A23			
0	IO_L45N_0	H19			
0	IO_L45P_0/VREF_0	G19			
0	IO_L46N_0	E19	NC		
0	IO_L46P_0	E18	NC		
0	IO_L47N_0	C22	NC		
0	IO_L47P_0	B22	NC		
0	IO_L48N_0	F20	NC		
0	IO_L48P_0	F19	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 718 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
0	IO_L49N_0	G17	NC		
0	IO_L49P_0	F17	NC		
0	IO_L50_0/No_Pair	B21	NC		
0	IO_L53_0/No_Pair	A21	NC		
0	IO_L54N_0	H18	NC		
0	IO_L54P_0	G18	NC		
0	IO_L56N_0	C21	NC		
0	IO_L56P_0	C20	NC		
0	IO_L57N_0	J17	NC		
0	IO_L57P_0/VREF_0	H17	NC		
0	IO_L67N_0	E17			
0	IO_L67P_0	D17			
0	IO_L68N_0	D18			
0	IO_L68P_0	C18			
0	IO_L69N_0	J16			
0	IO_L69P_0/VREF_0	H16			
0	IO_L73N_0	E16			
0	IO_L73P_0	D16			
0	IO_L74N_0/GCLK7P	C16			
0	IO_L74P_0/GCLK6S	B16			
0	IO_L75N_0/GCLK5P	G16			
0	IO_L75P_0/GCLK4S	F16			
1	IO_L75N_1/GCLK3P	F15			
1	IO_L75P_1/GCLK2S	G15			
1	IO_L74N_1/GCLK1P	B15			
1	IO_L74P_1/GCLK0S	C15			
1	IO_L73N_1	D15			
1	IO_L73P_1	E15			
1	IO_L69N_1/VREF_1	H15			
1	IO_L69P_1	J15			
1	IO_L68N_1	C13			
1	IO_L68P_1	D13			
1	IO_L67N_1	D14			
1	IO_L67P_1	E14			
1	IO_L57N_1/VREF_1	H14	NC		
1	IO_L57P_1	J14	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 719/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 719 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
1	IO_L56N_1	C11	NC		
1	IO_L56P_1	C10	NC		
1	IO_L54N_1	G13	NC		
1	IO_L54P_1	H13	NC		
1	IO_L53_1/No_Pair	A10	NC		
1	IO_L50_1/No_Pair	B10	NC		
1	IO_L49N_1	F14	NC		
1	IO_L49P_1	G14	NC		
1	IO_L48N_1	F12	NC		
1	IO_L48P_1	F11	NC		
1	IO_L47N_1	B9	NC		
1	IO_L47P_1	C9	NC		
1	IO_L46N_1	E13	NC		
1	IO_L46P_1	E12	NC		
1	IO_L45N_1/VREF_1	G12			
1	IO_L45P_1	H12			
1	IO_L44N_1	A8			
1	IO_L44P_1	B8			
1	IO_L43N_1	D11			
1	IO_L43P_1	E11			
1	IO_L39N_1	G11			
1	IO_L39P_1	H11			
1	IO_L38N_1	C8			
1	IO_L38P_1	D8			
1	IO_L37N_1	D10			
1	IO_L37P_1	E10			
1	IO_L09N_1/VREF_1	G10			
1	IO_L09P_1	H10			
1	IO_L08N_1	C7			
1	IO_L08P_1	D7			
1	IO_L07N_1	F10			
1	IO_L07P_1	F9			
1	IO_L06N_1	G9			
1	IO_L06P_1	H9			
1	IO_L05_1/No_Pair	G8			
1	IO_L03N_1/VREF_1	E9			
1	IO_L03P_1	E8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 720/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 720 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
1	IO_L02N_1	F8			
1	IO_L02P_1	F7			
1	IO_L01N_1/VRP_1	E7			
1	IO_L01P_1/VRN_1	E6			
2	IO_L01N_2/VRP_2	A3			
2	IO_L01P_2/VRN_2	B3			
2	IO_L02N_2	G6			
2	IO_L02P_2	G5			
2	IO_L03N_2	C5			
2	IO_L03P_2	D5			
2	IO_L04N_2/VREF_2	C2			
2	IO_L04P_2	C1			
2	IO_L05N_2	J8			
2	IO_L05P_2	J7			
2	IO_L06N_2	C4			
2	IO_L06P_2	D3			
2	IO_L31N_2	D2	NC		
2	IO_L31P_2	D1	NC		
2	IO_L32N_2	H6	NC		
2	IO_L32P_2	H5	NC		
2	IO_L33N_2	E4	NC		
2	IO_L33P_2	E3	NC		
2	IO_L34N_2/VREF_2	E2	NC		
2	IO_L34P_2	E1	NC		
2	IO_L35N_2	K8	NC		
2	IO_L35P_2	K7	NC		
2	IO_L36N_2	F4	NC		
2	IO_L36P_2	F3	NC		
2	IO_L37N_2	F2	NC		
2	IO_L37P_2	F1	NC		
2	IO_L38N_2	J6	NC		
2	IO_L38P_2	J5	NC		
2	IO_L39N_2	G4	NC		
2	IO_L39P_2	G3	NC		
2	IO_L40N_2/VREF_2	G2	NC		
2	IO_L40P_2	G1	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 721/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 721 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
2	IO_L41N_2	L8	NC		
2	IO_L41P_2	L7	NC		
2	IO_L42N_2	H4	NC		
2	IO_L42P_2	H3	NC		
2	IO_L43N_2	H2			
2	IO_L43P_2	J2			
2	IO_L44N_2	M8			
2	IO_L44P_2	M7			
2	IO_L45N_2	K6			
2	IO_L45P_2	K5			
2	IO_L46N_2/VREF_2	J1			
2	IO_L46P_2	K1			
2	IO_L47N_2	M6			
2	IO_L47P_2	M5			
2	IO_L48N_2	J4			
2	IO_L48P_2	J3			
2	IO_L49N_2	K2			
2	IO_L49P_2	L2			
2	IO_L50N_2	N8			
2	IO_L50P_2	N7			
2	IO_L51N_2	K4			
2	IO_L51P_2	K3			
2	IO_L52N_2/VREF_2	L1			
2	IO_L52P_2	M1			
2	IO_L53N_2	N6			
2	IO_L53P_2	N5			
2	IO_L54N_2	L5			
2	IO_L54P_2	L4			
2	IO_L55N_2	M2			
2	IO_L55P_2	N2			
2	IO_L56N_2	P9			
2	IO_L56P_2	R9			
2	IO_L57N_2	M4			
2	IO_L57P_2	M3			
2	IO_L58N_2/VREF_2	N1			
2	IO_L58P_2	P1			
2	IO_L59N_2	P8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 722 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
2	IO_L59P_2	P7			
2	IO_L60N_2	N4			
2	IO_L60P_2	N3			
2	IO_L85N_2	P3			
2	IO_L85P_2	P2			
2	IO_L86N_2	R8			
2	IO_L86P_2	R7			
2	IO_L87N_2	P5			
2	IO_L87P_2	P4			
2	IO_L88N_2/VREF_2	R2			
2	IO_L88P_2	T2			
2	IO_L89N_2	R6			
2	IO_L89P_2	R5			
2	IO_L90N_2	R4			
2	IO_L90P_2	R3			
3	IO_L90N_3	U1			
3	IO_L90P_3	V1			
3	IO_L89N_3	T5			
3	IO_L89P_3	T6			
3	IO_L88N_3	T3			
3	IO_L88P_3	T4			
3	IO_L87N_3/VREF_3	U2			
3	IO_L87P_3	U3			
3	IO_L86N_3	T7			
3	IO_L86P_3	T8			
3	IO_L85N_3	U4			
3	IO_L85P_3	U5			
3	IO_L60N_3	V2			
3	IO_L60P_3	W2			
3	IO_L59N_3	T9			
3	IO_L59P_3	U9			
3	IO_L58N_3	V3			
3	IO_L58P_3	V4			
3	IO_L57N_3/VREF_3	W1			
3	IO_L57P_3	Y1			
3	IO_L56N_3	U7			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 723/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 723 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
3	IO_L56P_3	U8			
3	IO_L55N_3	V5			
3	IO_L55P_3	V6			
3	IO_L54N_3	Y2			
3	IO_L54P_3	AA2			
3	IO_L53N_3	V7			
3	IO_L53P_3	V8			
3	IO_L52N_3	W3			
3	IO_L52P_3	W4			
3	IO_L51N_3/VREF_3	AA1			
3	IO_L51P_3	AB1			
3	IO_L50N_3	W5			
3	IO_L50P_3	W6			
3	IO_L49N_3	Y4			
3	IO_L49P_3	Y5			
3	IO_L48N_3	AA3			
3	IO_L48P_3	AA4			
3	IO_L47N_3	W7			
3	IO_L47P_3	W8			
3	IO_L46N_3	AB3			
3	IO_L46P_3	AB4			
3	IO_L45N_3/VREF_3	AB2			
3	IO_L45P_3	AC2			
3	IO_L44N_3	AA5			
3	IO_L44P_3	AA6			
3	IO_L43N_3	AC3			
3	IO_L43P_3	AC4			
3	IO_L42N_3	AD1	NC		
3	IO_L42P_3	AD2	NC		
3	IO_L41N_3	Y7	NC		
3	IO_L41P_3	Y8	NC		
3	IO_L40N_3	AB5	NC		
3	IO_L40P_3	AB6	NC		
3	IO_L39N_3/VREF_3	AE1	NC		
3	IO_L39P_3	AE2	NC		
3	IO_L38N_3	AA7	NC		
3	IO_L38P_3	AA8	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 724 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
3	IO_L37N_3	AD3	NC		
3	IO_L37P_3	AD4	NC		
3	IO_L36N_3	AF1	NC		
3	IO_L36P_3	AF2	NC		
3	IO_L35N_3	AC5	NC		
3	IO_L35P_3	AC6	NC		
3	IO_L34N_3	AF3	NC		
3	IO_L34P_3	AF4	NC		
3	IO_L33N_3/VREF_3	AE3	NC		
3	IO_L33P_3	AE4	NC		
3	IO_L32N_3	AB7	NC		
3	IO_L32P_3	AB8	NC		
3	IO_L31N_3	AE5	NC		
3	IO_L31P_3	AF6	NC		
3	IO_L06N_3	AG1			
3	IO_L06P_3	AG2			
3	IO_L05N_3	AD5			
3	IO_L05P_3	AD6			
3	IO_L04N_3	AG3			
3	IO_L04P_3	AH4			
3	IO_L03N_3/VREF_3	AH1			
3	IO_L03P_3	AH2			
3	IO_L02N_3	AG5			
3	IO_L02P_3	AH5			
3	IO_L01N_3/VRP_3	AJ3			
3	IO_L01P_3/VRN_3	AK3			
4	IO_L01N_4/BUSY/DOUT(1)	AG6			
4	IO_L01P_4/INIT_B	AF7			
4	IO_L02N_4/D0/DIN(1)	AC9			
4	IO_L02P_4/D1	AD9			
4	IO_L03N_4/D2	AG7			
4	IO_L03P_4/D3	AH7			
4	IO_L05_4/No_Pair	AD8			
4	IO_L06N_4/VRP_4	AG8			
4	IO_L06P_4/VRN_4	AH8			
4	IO_L07N_4	AC10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 725/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 725 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
4	IO_L07P_4/VREF_4	AD10			
4	IO_L08N_4	AE7			
4	IO_L08P_4	AE8			
4	IO_L09N_4	AJ8			
4	IO_L09P_4/VREF_4	AK8			
4	IO_L37N_4	AC11			
4	IO_L37P_4	AD11			
4	IO_L38N_4	AF8			
4	IO_L38P_4	AF9			
4	IO_L39N_4	AF10			
4	IO_L39P_4	AG10			
4	IO_L43N_4	AC12			
4	IO_L43P_4	AD12			
4	IO_L44N_4	AE9			
4	IO_L44P_4	AE10			
4	IO_L45N_4	AH9			
4	IO_L45P_4/VREF_4	AJ9			
4	IO_L46N_4	AC13	NC		
4	IO_L46P_4	AD13	NC		
4	IO_L47N_4	AE11	NC		
4	IO_L47P_4	AE12	NC		
4	IO_L48N_4	AH10	NC		
4	IO_L48P_4	AH11	NC		
4	IO_L49N_4	AB14	NC		
4	IO_L49P_4	AC14	NC		
4	IO_L50_4/No_Pair	AF11	NC		
4	IO_L53_4/No_Pair	AG11	NC		
4	IO_L54N_4	AJ10	NC		
4	IO_L54P_4	AK10	NC		
4	IO_L56N_4	AF12	NC		
4	IO_L56P_4	AF13	NC		
4	IO_L57N_4	AG13	NC		
4	IO_L57P_4/VREF_4	AH13	NC		
4	IO_L67N_4	AB15			
4	IO_L67P_4	AC15			
4	IO_L68N_4	AD14			
4	IO_L68P_4	AE14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 726 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
4	IO_L69N_4	AF14			
4	IO_L69P_4/VREF_4	AG14			
4	IO_L73N_4	AD15			
4	IO_L73P_4	AE15			
4	IO_L74N_4/GCLK3S	AF15			
4	IO_L74P_4/GCLK2P	AG15			
4	IO_L75N_4/GCLK1S	AH15			
4	IO_L75P_4/GCLK0P	AJ15			
5	IO_L75N_5/GCLK7S	AJ16			
5	IO_L75P_5/GCLK6P	AH16			
5	IO_L74N_5/GCLK5S	AG16			
5	IO_L74P_5/GCLK4P	AF16			
5	IO_L73N_5	AE16			
5	IO_L73P_5	AD16			
5	IO_L69N_5/VREF_5	AG17			
5	IO_L69P_5	AF17			
5	IO_L68N_5	AE17			
5	IO_L68P_5	AD17			
5	IO_L67N_5	AC16			
5	IO_L67P_5	AB16			
5	IO_L57N_5/VREF_5	AH18	NC		
5	IO_L57P_5	AG18	NC		
5	IO_L56N_5	AF18	NC		
5	IO_L56P_5	AF19	NC		
5	IO_L54N_5	AK21	NC		
5	IO_L54P_5	AJ21	NC		
5	IO_L53_5/No_Pair	AG20	NC		
5	IO_L50_5/No_Pair	AF20	NC		
5	IO_L49N_5	AC17	NC		
5	IO_L49P_5	AB17	NC		
5	IO_L48N_5	AH20	NC		
5	IO_L48P_5	AH21	NC		
5	IO_L47N_5	AE19	NC		
5	IO_L47P_5	AE20	NC		
5	IO_L46N_5	AD18	NC		
5	IO_L46P_5	AC18	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 727/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 727 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
5	IO_L45N_5/VREF_5	AJ22			
5	IO_L45P_5	AH22			
5	IO_L44N_5	AE21			
5	IO_L44P_5	AE22			
5	IO_L43N_5	AD19			
5	IO_L43P_5	AC19			
5	IO_L39N_5	AG21			
5	IO_L39P_5	AF21			
5	IO_L38N_5	AF22			
5	IO_L38P_5	AF23			
5	IO_L37N_5	AD20			
5	IO_L37P_5	AC20			
5	IO_L09N_5/VREF_5	AK23			
5	IO_L09P_5	AJ23			
5	IO_L08N_5	AE23			
5	IO_L08P_5	AE24			
5	IO_L07N_5/VREF_5	AD21			
5	IO_L07P_5	AC21			
5	IO_L06N_5/VRP_5	AH23			
5	IO_L06P_5/VRN_5	AG23			
5	IO_L05_5/No_Pair	AD23			
5	IO_L03N_5/D4	AH24			
5	IO_L03P_5/D5	AG24			
5	IO_L02N_5/D6	AD22			
5	IO_L02P_5/D7	AC22			
5	IO_L01N_5/RDWR_B	AF24			
5	IO_L01P_5/CS_B	AG25			
6	IO_L01P_6/VRN_6	AK28			
6	IO_L01N_6/VRP_6	AJ28			
6	IO_L02P_6	AH26			
6	IO_L02N_6	AG26			
6	IO_L03P_6	AH29			
6	IO_L03N_6/VREF_6	AH30			
6	IO_L04P_6	AH27			
6	IO_L04N_6	AG28			
6	IO_L05P_6	AD25			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 728 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
6	IO_L05N_6	AD26			
6	IO_L06P_6	AG29			
6	IO_L06N_6	AG30			
6	IO_L31P_6	AF25	NC		
6	IO_L31N_6	AE26	NC		
6	IO_L32P_6	AB23	NC		
6	IO_L32N_6	AB24	NC		
6	IO_L33P_6	AE27	NC		
6	IO_L33N_6/VREF_6	AE28	NC		
6	IO_L34P_6	AF27	NC		
6	IO_L34N_6	AF28	NC		
6	IO_L35P_6	AC25	NC		
6	IO_L35N_6	AC26	NC		
6	IO_L36P_6	AF29	NC		
6	IO_L36N_6	AF30	NC		
6	IO_L37P_6	AD27	NC		
6	IO_L37N_6	AD28	NC		
6	IO_L38P_6	AA23	NC		
6	IO_L38N_6	AA24	NC		
6	IO_L39P_6	AE29	NC		
6	IO_L39N_6/VREF_6	AE30	NC		
6	IO_L40P_6	AB25	NC		
6	IO_L40N_6	AB26	NC		
6	IO_L41P_6	Y23	NC		
6	IO_L41N_6	Y24	NC		
6	IO_L42P_6	AD29	NC		
6	IO_L42N_6	AD30	NC		
6	IO_L43P_6	AC27			
6	IO_L43N_6	AC28			
6	IO_L44P_6	AA25			
6	IO_L44N_6	AA26			
6	IO_L45P_6	AC29			
6	IO_L45N_6/VREF_6	AB29			
6	IO_L46P_6	AB27			
6	IO_L46N_6	AB28			
6	IO_L47P_6	W23			
6	IO_L47N_6	W24			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 729/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 729 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
6	IO_L48P_6	AA27			
6	IO_L48N_6	AA28			
6	IO_L49P_6	Y26			
6	IO_L49N_6	Y27			
6	IO_L50P_6	W25			
6	IO_L50N_6	W26			
6	IO_L51P_6	AB30			
6	IO_L51N_6/VREF_6	AA30			
6	IO_L52P_6	W27			
6	IO_L52N_6	W28			
6	IO_L53P_6	V23			
6	IO_L53N_6	V24			
6	IO_L54P_6	AA29			
6	IO_L54N_6	Y29			
6	IO_L55P_6	V25			
6	IO_L55N_6	V26			
6	IO_L56P_6	U23			
6	IO_L56N_6	U24			
6	IO_L57P_6	Y30			
6	IO_L57N_6/VREF_6	W30			
6	IO_L58P_6	V27			
6	IO_L58N_6	V28			
6	IO_L59P_6	U22			
6	IO_L59N_6	T22			
6	IO_L60P_6	W29			
6	IO_L60N_6	V29			
6	IO_L85P_6	U26			
6	IO_L85N_6	U27			
6	IO_L86P_6	T23			
6	IO_L86N_6	T24			
6	IO_L87P_6	U28			
6	IO_L87N_6/VREF_6	U29			
6	IO_L88P_6	T27			
6	IO_L88N_6	T28			
6	IO_L89P_6	T25			
6	IO_L89N_6	T26			
6	IO_L90P_6	V30			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 730/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 730 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
6	IO_L90N_6	U30			
7	IO_L90P_7	R28			
7	IO_L90N_7	R27			
7	IO_L89P_7	R26			
7	IO_L89N_7	R25			
7	IO_L88P_7	T29			
7	IO_L88N_7/VREF_7	R29			
7	IO_L87P_7	P27			
7	IO_L87N_7	P26			
7	IO_L86P_7	R24			
7	IO_L86N_7	R23			
7	IO_L85P_7	P29			
7	IO_L85N_7	P28			
7	IO_L60P_7	N28			
7	IO_L60N_7	N27			
7	IO_L59P_7	P24			
7	IO_L59N_7	P23			
7	IO_L58P_7	P30			
7	IO_L58N_7/VREF_7	N30			
7	IO_L57P_7	M28			
7	IO_L57N_7	M27			
7	IO_L56P_7	R22			
7	IO_L56N_7	P22			
7	IO_L55P_7	N29			
7	IO_L55N_7	M29			
7	IO_L54P_7	L27			
7	IO_L54N_7	L26			
7	IO_L53P_7	N26			
7	IO_L53N_7	N25			
7	IO_L52P_7	M30			
7	IO_L52N_7/VREF_7	L30			
7	IO_L51P_7	K28			
7	IO_L51N_7	K27			
7	IO_L50P_7	N24			
7	IO_L50N_7	N23			
7	IO_L49P_7	L29			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 731/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 731 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
7	IO_L49N_7	K29			
7	IO_L48P_7	J28			
7	IO_L48N_7	J27			
7	IO_L47P_7	M26			
7	IO_L47N_7	M25			
7	IO_L46P_7	K30			
7	IO_L46N_7/VREF_7	J30			
7	IO_L45P_7	K26			
7	IO_L45N_7	K25			
7	IO_L44P_7	M24			
7	IO_L44N_7	M23			
7	IO_L43P_7	J29			
7	IO_L43N_7	H29			
7	IO_L42P_7	H28	NC		
7	IO_L42N_7	H27	NC		
7	IO_L41P_7	L24	NC		
7	IO_L41N_7	L23	NC		
7	IO_L40P_7	G30	NC		
7	IO_L40N_7/VREF_7	G29	NC		
7	IO_L39P_7	G28	NC		
7	IO_L39N_7	G27	NC		
7	IO_L38P_7	J26	NC		
7	IO_L38N_7	J25	NC		
7	IO_L37P_7	F30	NC		
7	IO_L37N_7	F29	NC		
7	IO_L36P_7	F28	NC		
7	IO_L36N_7	F27	NC		
7	IO_L35P_7	K24	NC		
7	IO_L35N_7	K23	NC		
7	IO_L34P_7	E30	NC		
7	IO_L34N_7/VREF_7	E29	NC		
7	IO_L33P_7	E28	NC		
7	IO_L33N_7	E27	NC		
7	IO_L32P_7	H26	NC		
7	IO_L32N_7	H25	NC		
7	IO_L31P_7	D30	NC		
7	IO_L31N_7	D29	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 732 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
7	IO_L06P_7	D28			
7	IO_L06N_7	C27			
7	IO_L05P_7	J24			
7	IO_L05N_7	J23			
7	IO_L04P_7	C30			
7	IO_L04N_7/VREF_7	C29			
7	IO_L03P_7	D26			
7	IO_L03N_7	C26			
7	IO_L02P_7	G26			
7	IO_L02N_7	G25			
7	IO_L01P_7/VRN_7	B28			
7	IO_L01N_7/VRP_7	A28			
0	VCCO_0	K21			
0	VCCO_0	K20			
0	VCCO_0	K19			
0	VCCO_0	K18			
0	VCCO_0	K17			
0	VCCO_0	K16			
0	VCCO_0	J21			
0	VCCO_0	J20			
0	VCCO_0	J19			
0	VCCO_0	J18			
1	VCCO_1	K15			
1	VCCO_1	K14			
1	VCCO_1	K13			
1	VCCO_1	K12			
1	VCCO_1	K11			
1	VCCO_1	K10			
1	VCCO_1	J13			
1	VCCO_1	J12			
1	VCCO_1	J11			
1	VCCO_1	J10			
2	VCCO_2	R10			
2	VCCO_2	P10			
2	VCCO_2	N10			
2	VCCO_2	N9			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 733/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 733 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
2	VCCO_2	M10			
2	VCCO_2	M9			
2	VCCO_2	L10			
2	VCCO_2	L9			
2	VCCO_2	K9			
2	VCCO_2	J9			
3	VCCO_3	AB9			
3	VCCO_3	AA9			
3	VCCO_3	Y10			
3	VCCO_3	Y9			
3	VCCO_3	W10			
3	VCCO_3	W9			
3	VCCO_3	V10			
3	VCCO_3	V9			
3	VCCO_3	U10			
3	VCCO_3	T10			
4	VCCO_4	AB13			
4	VCCO_4	AB12			
4	VCCO_4	AB11			
4	VCCO_4	AB10			
4	VCCO_4	AA15			
4	VCCO_4	AA14			
4	VCCO_4	AA13			
4	VCCO_4	AA12			
4	VCCO_4	AA11			
4	VCCO_4	AA10			
5	VCCO_5	AB21			
5	VCCO_5	AB20			
5	VCCO_5	AB19			
5	VCCO_5	AB18			
5	VCCO_5	AA21			
5	VCCO_5	AA20			
5	VCCO_5	AA19			
5	VCCO_5	AA18			
5	VCCO_5	AA17			
5	VCCO_5	AA16			
6	VCCO_6	AB22			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 734 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
6	VCCO_6	AA22			
6	VCCO_6	Y22			
6	VCCO_6	Y21			
6	VCCO_6	W22			
6	VCCO_6	W21			
6	VCCO_6	V22			
6	VCCO_6	V21			
6	VCCO_6	U21			
6	VCCO_6	T21			
7	VCCO_7	R21			
7	VCCO_7	P21			
7	VCCO_7	N22			
7	VCCO_7	N21			
7	VCCO_7	M22			
7	VCCO_7	M21			
7	VCCO_7	L22			
7	VCCO_7	L21			
7	VCCO_7	K22			
7	VCCO_7	J22			
N/A	CCLK	AC7			
N/A	PROG_B	G24			
N/A	DONE	AC8			
N/A	M0	AD24			
N/A	M1	AC24			
N/A	M2	AC23			
N/A	TCK	G7			
N/A	TDI	F26			
N/A	TDO	F5			
N/A	TMS	H8			
N/A	PWRDWN_B	AD7			
N/A	HSWAP_EN	H23			
N/A	RSVD	D6			
N/A	VBATT	H7			
N/A	DXP	H24			
N/A	DXN	D25			
N/A	AVCCAUXTX4	B26			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 735/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 735 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	VTTXPAD4	B27			
N/A	TXNPAD4	A27			
N/A	TXPPAD4	A26			
N/A	GNDA4	C25			
N/A	RXPPAD4	A25			
N/A	RXNPAD4	A24			
N/A	VTRXPAD4	B25			
N/A	AVCCAUXRX4	B24			
N/A	AVCCAUXTX6	B19			
N/A	VTTXPAD6	B20			
N/A	TXNPAD6	A20			
N/A	TXPPAD6	A19			
N/A	GNDA6	C19			
N/A	RXPPAD6	A18			
N/A	RXNPAD6	A17			
N/A	VTRXPAD6	B18			
N/A	AVCCAUXRX6	B17			
N/A	AVCCAUXTX7	B13			
N/A	VTTXPAD7	B14			
N/A	TXNPAD7	A14			
N/A	TXPPAD7	A13			
N/A	GNDA7	C12			
N/A	RXPPAD7	A12			
N/A	RXNPAD7	A11			
N/A	VTRXPAD7	B12			
N/A	AVCCAUXRX7	B11			
N/A	AVCCAUXTX9	B6			
N/A	VTTXPAD9	B7			
N/A	TXNPAD9	A7			
N/A	TXPPAD9	A6			
N/A	GNDA9	C6			
N/A	RXPPAD9	A5			
N/A	RXNPAD9	A4			
N/A	VTRXPAD9	B5			
N/A	AVCCAUXRX9	B4			
N/A	AVCCAUXRX16	AJ4			
N/A	VTRXPAD16	AJ5			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 736 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	RXNPAD16	AK4			
N/A	RXPPAD16	AK5			
N/A	GNDA16	AH6			
N/A	TXPPAD16	AK6			
N/A	TXNPAD16	AK7			
N/A	VTTXPAD16	AJ7			
N/A	AVCCAUXTX16	AJ6			
N/A	AVCCAUXRX18	AJ11			
N/A	VTRXPAD18	AJ12			
N/A	RXNPAD18	AK11			
N/A	RXPPAD18	AK12			
N/A	GNDA18	AH12			
N/A	TXPPAD18	AK13			
N/A	TXNPAD18	AK14			
N/A	VTTXPAD18	AJ14			
N/A	AVCCAUXTX18	AJ13			
N/A	AVCCAUXRX19	AJ17			
N/A	VTRXPAD19	AJ18			
N/A	RXNPAD19	AK17			
N/A	RXPPAD19	AK18			
N/A	GNDA19	AH19			
N/A	TXPPAD19	AK19			
N/A	TXNPAD19	AK20			
N/A	VTTXPAD19	AJ20			
N/A	AVCCAUXTX19	AJ19			
N/A	AVCCAUXRX21	AJ24			
N/A	VTRXPAD21	AJ25			
N/A	RXNPAD21	AK24			
N/A	RXPPAD21	AK25			
N/A	GNDA21	AH25			
N/A	TXPPAD21	AK26			
N/A	TXNPAD21	AK27			
N/A	VTTXPAD21	AJ27			
N/A	AVCCAUXTX21	AJ26			
N/A	VCCAUX	AK29			
N/A	VCCAUX	AK16			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 737/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 737 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	VCCAUX	AK15			
N/A	VCCAUX	AK2			
N/A	VCCAUX	AJ30			
N/A	VCCAUX	AJ1			
N/A	VCCAUX	T30			
N/A	VCCAUX	T1			
N/A	VCCAUX	R30			
N/A	VCCAUX	R1			
N/A	VCCAUX	B30			
N/A	VCCAUX	B1			
N/A	VCCAUX	A29			
N/A	VCCAUX	A16			
N/A	VCCAUX	A15			
N/A	VCCAUX	A2			
N/A	VCCINT	Y19			
N/A	VCCINT	Y18			
N/A	VCCINT	Y17			
N/A	VCCINT	Y16			
N/A	VCCINT	Y15			
N/A	VCCINT	Y14			
N/A	VCCINT	Y13			
N/A	VCCINT	Y12			
N/A	VCCINT	W20			
N/A	VCCINT	W11			
N/A	VCCINT	V20			
N/A	VCCINT	V11			
N/A	VCCINT	U20			
N/A	VCCINT	U11			
N/A	VCCINT	T20			
N/A	VCCINT	T11			
N/A	VCCINT	R20			
N/A	VCCINT	R11			
N/A	VCCINT	P20			
N/A	VCCINT	P11			
N/A	VCCINT	N20			
N/A	VCCINT	N11			
N/A	VCCINT	M20			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 738 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	VCCINT	M11			
N/A	VCCINT	L19			
N/A	VCCINT	L18			
N/A	VCCINT	L17			
N/A	VCCINT	L16			
N/A	VCCINT	L15			
N/A	VCCINT	L14			
N/A	VCCINT	L13			
N/A	VCCINT	L12			
N/A	GND	AK22			
N/A	GND	AK9			
N/A	GND	AJ29			
N/A	GND	AJ2			
N/A	GND	AH28			
N/A	GND	AH17			
N/A	GND	AH14			
N/A	GND	AH3			
N/A	GND	AG27			
N/A	GND	AG22			
N/A	GND	AG19			
N/A	GND	AG12			
N/A	GND	AG9			
N/A	GND	AG4			
N/A	GND	AF26			
N/A	GND	AF5			
N/A	GND	AE25			
N/A	GND	AE18			
N/A	GND	AE13			
N/A	GND	AE6			
N/A	GND	AC30			
N/A	GND	AC1			
N/A	GND	Y28			
N/A	GND	Y25			
N/A	GND	Y20			
N/A	GND	Y11			
N/A	GND	Y6			
N/A	GND	Y3			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 739/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 739 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	GND	W19			
N/A	GND	W18			
N/A	GND	W17			
N/A	GND	W16			
N/A	GND	W15			
N/A	GND	W14			
N/A	GND	W13			
N/A	GND	W12			
N/A	GND	V19			
N/A	GND	V18			
N/A	GND	V17			
N/A	GND	V16			
N/A	GND	V15			
N/A	GND	V14			
N/A	GND	V13			
N/A	GND	V12			
N/A	GND	U25			
N/A	GND	U19			
N/A	GND	U18			
N/A	GND	U17			
N/A	GND	U16			
N/A	GND	U15			
N/A	GND	U14			
N/A	GND	U13			
N/A	GND	U12			
N/A	GND	U6			
N/A	GND	T19			
N/A	GND	T18			
N/A	GND	T17			
N/A	GND	T16			
N/A	GND	T15			
N/A	GND	T14			
N/A	GND	T13			
N/A	GND	T12			
N/A	GND	R19			
N/A	GND	R18			
N/A	GND	R17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 740 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	GND	R16			
N/A	GND	R15			
N/A	GND	R14			
N/A	GND	R13			
N/A	GND	R12			
N/A	GND	P25			
N/A	GND	P19			
N/A	GND	P18			
N/A	GND	P17			
N/A	GND	P16			
N/A	GND	P15			
N/A	GND	P14			
N/A	GND	P13			
N/A	GND	P12			
N/A	GND	P6			
N/A	GND	N19			
N/A	GND	N18			
N/A	GND	N17			
N/A	GND	N16			
N/A	GND	N15			
N/A	GND	N14			
N/A	GND	N13			
N/A	GND	N12			
N/A	GND	M19			
N/A	GND	M18			
N/A	GND	M17			
N/A	GND	M16			
N/A	GND	M15			
N/A	GND	M14			
N/A	GND	M13			
N/A	GND	M12			
N/A	GND	L28			
N/A	GND	L25			
N/A	GND	L20			
N/A	GND	L11			
N/A	GND	L6			
N/A	GND	L3			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 741/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 741 of 947

Table 9: **FF896 — XC2VP7, XC2VP20, and XC2VP30**


Bank	Pin Description	Pin Number	No Connects		
			XC2VP7	XC2VP20	XC2VP30
N/A	GND	H30			
N/A	GND	H1			
N/A	GND	F25			
N/A	GND	F18			
N/A	GND	F13			
N/A	GND	F6			
N/A	GND	E26			
N/A	GND	E5			
N/A	GND	D27			
N/A	GND	D22			
N/A	GND	D19			
N/A	GND	D12			
N/A	GND	D9			
N/A	GND	D4			
N/A	GND	C28			
N/A	GND	C17			
N/A	GND	C14			
N/A	GND	C3			
N/A	GND	B29			
N/A	GND	B2			
N/A	GND	A22			
N/A	GND	A9			

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 742 of 947

FF896 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

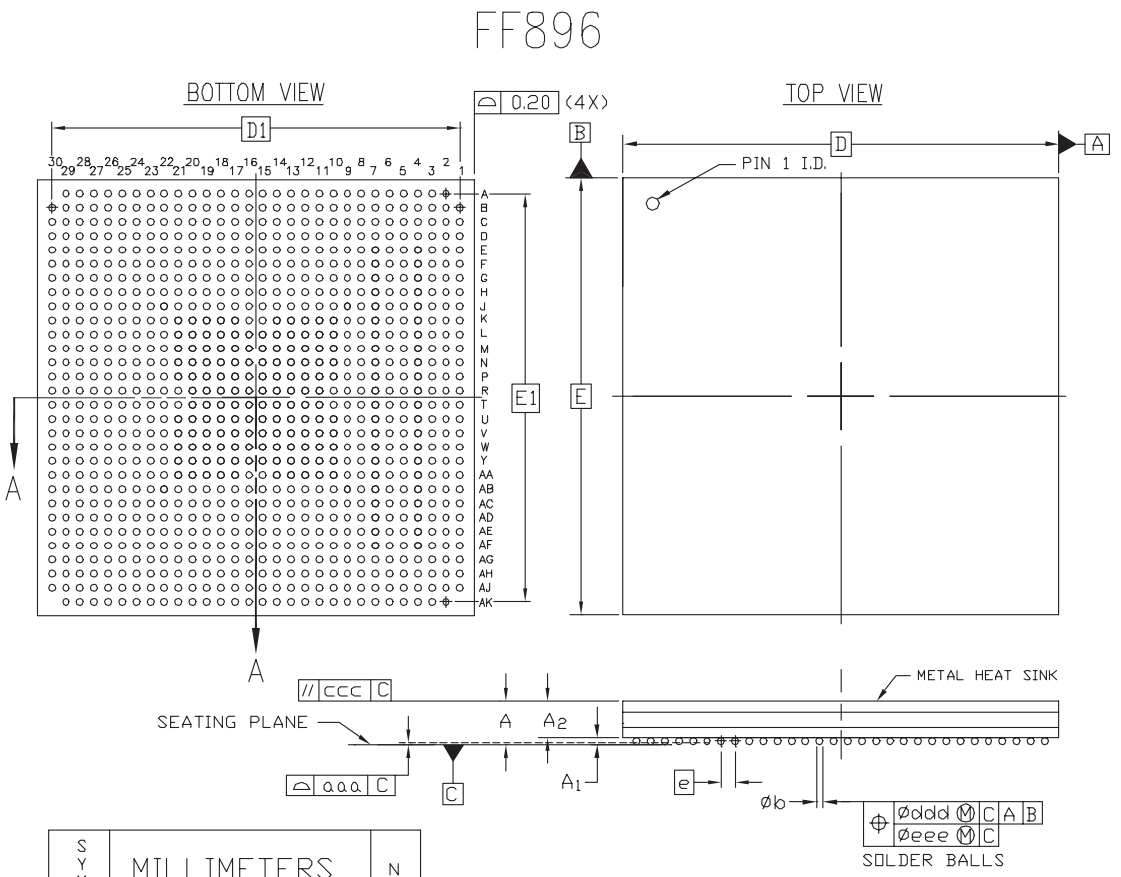

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.40	
A_1	0.40	0.50	0.60	
A_2			2.80	
D/E	31.00 BASIC			
D_1/E_1	29.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	30			2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAN–1 (DEPOPULATED)

Figure 5: **FF896 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 743/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 743 of 947

FF1152 Flip-Chip Fine-Pitch BGA Package

As shown in Table 10, XC2VP20, XC2VP30, XC2VP40, and XC2VP50 Virtex-II Pro devices are available in the FF1152 flip-chip fine-pitch BGA package. Pins in each of these devices are the same, except for the differences shown in the No Connect column. Following this table are the FF1152 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
0	IO_L01N_0/VRP_0	E29				
0	IO_L01P_0/VRN_0	E28				
0	IO_L02N_0	H26				
0	IO_L02P_0	G26				
0	IO_L03N_0	H25				
0	IO_L03P_0/VREF_0	G25				
0	IO_L05_0/No_Pair	J25				
0	IO_L06N_0	K24				
0	IO_L06P_0	J24				
0	IO_L07N_0	F26				
0	IO_L07P_0	E26				
0	IO_L08N_0	D30				
0	IO_L08P_0	D29				
0	IO_L09N_0	K23				
0	IO_L09P_0/VREF_0	J23				
0	IO_L19N_0	F24	NC	NC		
0	IO_L19P_0	E24	NC	NC		
0	IO_L20N_0	D28	NC	NC		
0	IO_L20P_0	C28	NC	NC		
0	IO_L21N_0	H24	NC	NC		
0	IO_L21P_0	G24	NC	NC		
0	IO_L25N_0	G23	NC	NC		
0	IO_L25P_0	F23	NC	NC		
0	IO_L26N_0	E27	NC	NC		
0	IO_L26P_0	D27	NC	NC		
0	IO_L27N_0	K22	NC	NC		
0	IO_L27P_0/VREF_0	J22	NC	NC		
0	IO_L37N_0	H22				
0	IO_L37P_0	G22				
0	IO_L38N_0	D26				
0	IO_L38P_0	C26				
0	IO_L39N_0	K21				
0	IO_L39P_0	J21				
0	IO_L43N_0	F22				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 744 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
0	IO_L43P_0	E22				
0	IO_L44N_0	E25				
0	IO_L44P_0	D25				
0	IO_L45N_0	H21				
0	IO_L45P_0/VREF_0	G21				
0	IO_L46N_0	D22				
0	IO_L46P_0	D23				
0	IO_L47N_0	D24				
0	IO_L47P_0	C24				
0	IO_L48N_0	K20				
0	IO_L48P_0	J20				
0	IO_L49N_0	F21				
0	IO_L49P_0	E21				
0	IO_L50_0/No_Pair	C21				
0	IO_L53_0/No_Pair	C22				
0	IO_L54N_0	L19				
0	IO_L54P_0	K19				
0	IO_L55N_0	G20				
0	IO_L55P_0	F20				
0	IO_L56N_0	D21				
0	IO_L56P_0	D20				
0	IO_L57N_0	J19				
0	IO_L57P_0/VREF_0	H19				
0	IO_L67N_0	G19				
0	IO_L67P_0	F19				
0	IO_L68N_0	E19				
0	IO_L68P_0	D19				
0	IO_L69N_0	L18				
0	IO_L69P_0/VREF_0	K18				
0	IO_L73N_0	G18				
0	IO_L73P_0	F18				
0	IO_L74N_0/GCLK7P	E18				
0	IO_L74P_0/GCLK6S	D18				
0	IO_L75N_0/GCLK5P	J18				
0	IO_L75P_0/GCLK4S	H18				
1	IO_L75N_1/GCLK3P	H17				
1	IO_L75P_1/GCLK2S	J17				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 745/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 745 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
1	IO_L74N_1/GCLK1P	D17				
1	IO_L74P_1/GCLK0S	E17				
1	IO_L73N_1	F17				
1	IO_L73P_1	G17				
1	IO_L69N_1/VREF_1	K17				
1	IO_L69P_1	L17				
1	IO_L68N_1	D16				
1	IO_L68P_1	E16				
1	IO_L67N_1	F16				
1	IO_L67P_1	G16				
1	IO_L57N_1/VREF_1	H16				
1	IO_L57P_1	J16				
1	IO_L56N_1	D15				
1	IO_L56P_1	D14				
1	IO_L55N_1	F15				
1	IO_L55P_1	G15				
1	IO_L54N_1	K16				
1	IO_L54P_1	L16				
1	IO_L53_1/No_Pair	C13				
1	IO_L50_1/No_Pair	C14				
1	IO_L49N_1	E14				
1	IO_L49P_1	F14				
1	IO_L48N_1	J15				
1	IO_L48P_1	K15				
1	IO_L47N_1	C11				
1	IO_L47P_1	D11				
1	IO_L46N_1	D12				
1	IO_L46P_1	D13				
1	IO_L45N_1/VREF_1	G14				
1	IO_L45P_1	H14				
1	IO_L44N_1	D10				
1	IO_L44P_1	E10				
1	IO_L43N_1	E13				
1	IO_L43P_1	F13				
1	IO_L39N_1	J14				
1	IO_L39P_1	K14				
1	IO_L38N_1	C9				
1	IO_L38P_1	D9				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 746 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
1	IO_L37N_1	G13				
1	IO_L37P_1	H13				
1	IO_L27N_1/VREF_1	J13	NC	NC		
1	IO_L27P_1	K13	NC	NC		
1	IO_L26N_1	D8	NC	NC		
1	IO_L26P_1	E8	NC	NC		
1	IO_L25N_1	F12	NC	NC		
1	IO_L25P_1	G12	NC	NC		
1	IO_L21N_1	G11	NC	NC		
1	IO_L21P_1	H11	NC	NC		
1	IO_L20N_1	C7	NC	NC		
1	IO_L20P_1	D7	NC	NC		
1	IO_L19N_1	E11	NC	NC		
1	IO_L19P_1	F11	NC	NC		
1	IO_L09N_1/VREF_1	J12				
1	IO_L09P_1	K12				
1	IO_L08N_1	D6				
1	IO_L08P_1	D5				
1	IO_L07N_1	E9				
1	IO_L07P_1	F9				
1	IO_L06N_1	J11				
1	IO_L06P_1	K11				
1	IO_L05_1/No_Pair	J10				
1	IO_L03N_1/VREF_1	G10				
1	IO_L03P_1	H10				
1	IO_L02N_1	G9				
1	IO_L02P_1	H9				
1	IO_L01N_1/VRP_1	E7				
1	IO_L01P_1/VRN_1	E6				
2	IO_L01N_2/VRP_2	D2				
2	IO_L01P_2/VRN_2	D1				
2	IO_L02N_2	F8				
2	IO_L02P_2	F7				
2	IO_L03N_2	E4				
2	IO_L03P_2	E3				
2	IO_L04N_2/VREF_2	E2				
2	IO_L04P_2	E1				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 747/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 747 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
2	IO_L05N_2	J8				
2	IO_L05P_2	J7				
2	IO_L06N_2	F5				
2	IO_L06P_2	F4				
2	IO_L15N_2	G4	NC			
2	IO_L15P_2	G3	NC			
2	IO_L16N_2/VREF_2	G6	NC			
2	IO_L16P_2	G5	NC			
2	IO_L17N_2	F2	NC			
2	IO_L17P_2	F1	NC			
2	IO_L18N_2	L10	NC			
2	IO_L18P_2	L9	NC			
2	IO_L19N_2	H6	NC			
2	IO_L19P_2	H5	NC			
2	IO_L20N_2	G2	NC			
2	IO_L20P_2	G1	NC			
2	IO_L21N_2	J6	NC			
2	IO_L21P_2	J5	NC			
2	IO_L22N_2/VREF_2	J4	NC			
2	IO_L22P_2	J3	NC			
2	IO_L23N_2	K8	NC			
2	IO_L23P_2	K7	NC			
2	IO_L24N_2	H4	NC			
2	IO_L24P_2	H3	NC			
2	IO_L31N_2	H2				
2	IO_L31P_2	H1				
2	IO_L32N_2	M10				
2	IO_L32P_2	M9				
2	IO_L33N_2	K5				
2	IO_L33P_2	K4				
2	IO_L34N_2/VREF_2	J2				
2	IO_L34P_2	K2				
2	IO_L35N_2	L8				
2	IO_L35P_2	L7				
2	IO_L36N_2	L6				
2	IO_L36P_2	L5				
2	IO_L37N_2	K1				
2	IO_L37P_2	L1				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 748 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
2	IO_L38N_2	N10				
2	IO_L38P_2	N9				
2	IO_L39N_2	M7				
2	IO_L39P_2	M6				
2	IO_L40N_2/VREF_2	L2				
2	IO_L40P_2	M2				
2	IO_L41N_2	N8				
2	IO_L41P_2	N7				
2	IO_L42N_2	L4				
2	IO_L42P_2	L3				
2	IO_L43N_2	M4				
2	IO_L43P_2	M3				
2	IO_L44N_2	P10				
2	IO_L44P_2	P9				
2	IO_L45N_2	N6				
2	IO_L45P_2	N5				
2	IO_L46N_2/VREF_2	M1				
2	IO_L46P_2	N1				
2	IO_L47N_2	P8				
2	IO_L47P_2	P7				
2	IO_L48N_2	N4				
2	IO_L48P_2	N3				
2	IO_L49N_2	N2				
2	IO_L49P_2	P2				
2	IO_L50N_2	R10				
2	IO_L50P_2	R9				
2	IO_L51N_2	P6				
2	IO_L51P_2	P5				
2	IO_L52N_2/VREF_2	P4				
2	IO_L52P_2	P3				
2	IO_L53N_2	T11				
2	IO_L53P_2	U11				
2	IO_L54N_2	R7				
2	IO_L54P_2	R6				
2	IO_L55N_2	P1				
2	IO_L55P_2	R1				
2	IO_L56N_2	T10				
2	IO_L56P_2	T9				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 749/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 749 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
2	IO_L57N_2	R4				
2	IO_L57P_2	R3				
2	IO_L58N_2/VREF_2	R2				
2	IO_L58P_2	T2				
2	IO_L59N_2	T8				
2	IO_L59P_2	T7				
2	IO_L60N_2	T6				
2	IO_L60P_2	T5				
2	IO_L85N_2	T4				
2	IO_L85P_2	T3				
2	IO_L86N_2	U10				
2	IO_L86P_2	U9				
2	IO_L87N_2	U6				
2	IO_L87P_2	U5				
2	IO_L88N_2/VREF_2	U2				
2	IO_L88P_2	V2				
2	IO_L89N_2	U8				
2	IO_L89P_2	U7				
2	IO_L90N_2	U4				
2	IO_L90P_2	U3				
3	IO_L90N_3	V3				
3	IO_L90P_3	V4				
3	IO_L89N_3	V7				
3	IO_L89P_3	V8				
3	IO_L88N_3	V5				
3	IO_L88P_3	V6				
3	IO_L87N_3/VREF_3	W2				
3	IO_L87P_3	Y2				
3	IO_L86N_3	V9				
3	IO_L86P_3	V10				
3	IO_L85N_3	W3				
3	IO_L85P_3	W4				
3	IO_L60N_3	Y1				
3	IO_L60P_3	AA1				
3	IO_L59N_3	V11				
3	IO_L59P_3	W11				
3	IO_L58N_3	W5				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 750 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
3	IO_L58P_3	W6				
3	IO_L57N_3/VREF_3	Y3				
3	IO_L57P_3	Y4				
3	IO_L56N_3	W7				
3	IO_L56P_3	W8				
3	IO_L55N_3	Y6				
3	IO_L55P_3	Y7				
3	IO_L54N_3	AA2				
3	IO_L54P_3	AB2				
3	IO_L53N_3	W9				
3	IO_L53P_3	W10				
3	IO_L52N_3	AA3				
3	IO_L52P_3	AA4				
3	IO_L51N_3/VREF_3	AB1				
3	IO_L51P_3	AC1				
3	IO_L50N_3	Y9				
3	IO_L50P_3	Y10				
3	IO_L49N_3	AA5				
3	IO_L49P_3	AA6				
3	IO_L48N_3	AB3				
3	IO_L48P_3	AB4				
3	IO_L47N_3	AA7				
3	IO_L47P_3	AA8				
3	IO_L46N_3	AB5				
3	IO_L46P_3	AB6				
3	IO_L45N_3/VREF_3	AC2				
3	IO_L45P_3	AD2				
3	IO_L44N_3	AA9				
3	IO_L44P_3	AA10				
3	IO_L43N_3	AC3				
3	IO_L43P_3	AC4				
3	IO_L42N_3	AD1				
3	IO_L42P_3	AE1				
3	IO_L41N_3	AB7				
3	IO_L41P_3	AB8				
3	IO_L40N_3	AC6				
3	IO_L40P_3	AC7				
3	IO_L39N_3/VREF_3	AD3				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 751/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 751 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
3	IO_L39P_3	AD4				
3	IO_L38N_3	AB9				
3	IO_L38P_3	AB10				
3	IO_L37N_3	AD5				
3	IO_L37P_3	AD6				
3	IO_L36N_3	AE2				
3	IO_L36P_3	AF2				
3	IO_L35N_3	AD7				
3	IO_L35P_3	AD8				
3	IO_L34N_3	AE4				
3	IO_L34P_3	AE5				
3	IO_L33N_3/VREF_3	AG1				
3	IO_L33P_3	AG2				
3	IO_L32N_3	AC9				
3	IO_L32P_3	AC10				
3	IO_L31N_3	AF3				
3	IO_L31P_3	AF4				
3	IO_L24N_3	AH1	NC			
3	IO_L24P_3	AH2	NC			
3	IO_L23N_3	AE7	NC			
3	IO_L23P_3	AE8	NC			
3	IO_L22N_3	AF5	NC			
3	IO_L22P_3	AF6	NC			
3	IO_L21N_3/VREF_3	AG3	NC			
3	IO_L21P_3	AG4	NC			
3	IO_L20N_3	AD9	NC			
3	IO_L20P_3	AD10	NC			
3	IO_L19N_3	AH3	NC			
3	IO_L19P_3	AH4	NC			
3	IO_L18N_3	AJ1	NC			
3	IO_L18P_3	AJ2	NC			
3	IO_L17N_3	AF7	NC			
3	IO_L17P_3	AF8	NC			
3	IO_L16N_3	AK1	NC			
3	IO_L16P_3	AK2	NC			
3	IO_L15N_3/VREF_3	AG5	NC			
3	IO_L15P_3	AG6	NC			
3	IO_L06N_3	AL1				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 752 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
3	IO_L06P_3	AL2				
3	IO_L05N_3	AG7				
3	IO_L05P_3	AH8				
3	IO_L04N_3	AH5				
3	IO_L04P_3	AH6				
3	IO_L03N_3/VREF_3	AK3				
3	IO_L03P_3	AK4				
3	IO_L02N_3	AJ7				
3	IO_L02P_3	AJ8				
3	IO_L01N_3/VRP_3	AJ4				
3	IO_L01P_3/VRN_3	AJ5				
4	IO_L01N_4/BUSY/DOUT(1)	AL5				
4	IO_L01P_4/INIT_B	AL6				
4	IO_L02N_4/D0/DIN(1)	AG9				
4	IO_L02P_4/D1	AH9				
4	IO_L03N_4/D2	AK6				
4	IO_L03P_4/D3	AK7				
4	IO_L05_4/No_Pair	AF10				
4	IO_L06N_4/VRP_4	AL7				
4	IO_L06P_4/VRN_4	AM7				
4	IO_L07N_4	AE11				
4	IO_L07P_4/VREF_4	AF11				
4	IO_L08N_4	AG10				
4	IO_L08P_4	AH10				
4	IO_L09N_4	AK8				
4	IO_L09P_4/VREF_4	AL8				
4	IO_L19N_4	AE12	NC	NC		
4	IO_L19P_4	AF12	NC	NC		
4	IO_L20N_4	AJ9	NC	NC		
4	IO_L20P_4	AK9	NC	NC		
4	IO_L21N_4	AL9	NC	NC		
4	IO_L21P_4	AM9	NC	NC		
4	IO_L25N_4	AG11	NC	NC		
4	IO_L25P_4	AH11	NC	NC		
4	IO_L26N_4	AH12	NC	NC		
4	IO_L26P_4	AJ12	NC	NC		
4	IO_L27N_4	AK10	NC	NC		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 753/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 753 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
4	IO_L27P_4/VREF_4	AL10	NC	NC		
4	IO_L37N_4	AE13				
4	IO_L37P_4	AF13				
4	IO_L38N_4	AG13				
4	IO_L38P_4	AH13				
4	IO_L39N_4	AJ11				
4	IO_L39P_4	AK11				
4	IO_L43N_4	AE14				
4	IO_L43P_4	AF14				
4	IO_L44N_4	AJ13				
4	IO_L44P_4	AK13				
4	IO_L45N_4	AL11				
4	IO_L45P_4/VREF_4	AM11				
4	IO_L46N_4	AE15				
4	IO_L46P_4	AF15				
4	IO_L47N_4	AG14				
4	IO_L47P_4	AH14				
4	IO_L48N_4	AL13				
4	IO_L48P_4	AL12				
4	IO_L49N_4	AD16				
4	IO_L49P_4	AE16				
4	IO_L50_4/No_Pair	AJ14				
4	IO_L53_4/No_Pair	AK14				
4	IO_L54N_4	AM14				
4	IO_L54P_4	AM13				
4	IO_L55N_4	AF16				
4	IO_L55P_4	AG16				
4	IO_L56N_4	AH15				
4	IO_L56P_4	AJ15				
4	IO_L57N_4	AL14				
4	IO_L57P_4/VREF_4	AL15				
4	IO_L67N_4	AD17				
4	IO_L67P_4	AE17				
4	IO_L68N_4	AH16				
4	IO_L68P_4	AJ16				
4	IO_L69N_4	AK16				
4	IO_L69P_4/VREF_4	AL16				
4	IO_L73N_4	AF17				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 754 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
4	IO_L73P_4	AG17				
4	IO_L74N_4/GCLK3S	AH17				
4	IO_L74P_4/GCLK2P	AJ17				
4	IO_L75N_4/GCLK1S	AK17				
4	IO_L75P_4/GCLK0P	AL17				
5	IO_L75N_5/GCLK7S	AL18				
5	IO_L75P_5/GCLK6P	AK18				
5	IO_L74N_5/GCLK5S	AJ18				
5	IO_L74P_5/GCLK4P	AH18				
5	IO_L73N_5	AG18				
5	IO_L73P_5	AF18				
5	IO_L69N_5/VREF_5	AL19				
5	IO_L69P_5	AK19				
5	IO_L68N_5	AJ19				
5	IO_L68P_5	AH19				
5	IO_L67N_5	AE18				
5	IO_L67P_5	AD18				
5	IO_L57N_5/VREF_5	AL20				
5	IO_L57P_5	AL21				
5	IO_L56N_5	AJ20				
5	IO_L56P_5	AH20				
5	IO_L55N_5	AG19				
5	IO_L55P_5	AF19				
5	IO_L54N_5	AM22				
5	IO_L54P_5	AM21				
5	IO_L53_5/No_Pair	AK21				
5	IO_L50_5/No_Pair	AJ21				
5	IO_L49N_5	AE19				
5	IO_L49P_5	AD19				
5	IO_L48N_5	AL23				
5	IO_L48P_5	AL22				
5	IO_L47N_5	AH21				
5	IO_L47P_5	AG21				
5	IO_L46N_5	AF20				
5	IO_L46P_5	AE20				
5	IO_L45N_5/VREF_5	AM24				
5	IO_L45P_5	AL24				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 755/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 755 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
5	IO_L44N_5	AK22				
5	IO_L44P_5	AJ22				
5	IO_L43N_5	AF21				
5	IO_L43P_5	AE21				
5	IO_L39N_5	AK24				
5	IO_L39P_5	AJ24				
5	IO_L38N_5	AH22				
5	IO_L38P_5	AG22				
5	IO_L37N_5	AF22				
5	IO_L37P_5	AE22				
5	IO_L27N_5/VREF_5	AL25	NC	NC		
5	IO_L27P_5	AK25	NC	NC		
5	IO_L26N_5	AJ23	NC	NC		
5	IO_L26P_5	AH23	NC	NC		
5	IO_L25N_5	AH24	NC	NC		
5	IO_L25P_5	AG24	NC	NC		
5	IO_L21N_5	AM26	NC	NC		
5	IO_L21P_5	AL26	NC	NC		
5	IO_L20N_5	AK26	NC	NC		
5	IO_L20P_5	AJ26	NC	NC		
5	IO_L19N_5	AF23	NC	NC		
5	IO_L19P_5	AE23	NC	NC		
5	IO_L09N_5/VREF_5	AL27				
5	IO_L09P_5	AK27				
5	IO_L08N_5	AH25				
5	IO_L08P_5	AG25				
5	IO_L07N_5/VREF_5	AF24				
5	IO_L07P_5	AE24				
5	IO_L06N_5/VRP_5	AM28				
5	IO_L06P_5/VRN_5	AL28				
5	IO_L05_5/No_Pair	AF25				
5	IO_L03N_5/D4	AK28				
5	IO_L03P_5/D5	AK29				
5	IO_L02N_5/D6	AH26				
5	IO_L02P_5/D7	AG26				
5	IO_L01N_5/RDWR_B	AL29				
5	IO_L01P_5/CS_B	AL30				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 756 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
6	IO_L01P_6/VRN_6	AJ30				
6	IO_L01N_6/VRP_6	AJ31				
6	IO_L02P_6	AJ27				
6	IO_L02N_6	AJ28				
6	IO_L03P_6	AK31				
6	IO_L03N_6/VREF_6	AK32				
6	IO_L04P_6	AH29				
6	IO_L04N_6	AH30				
6	IO_L05P_6	AH27				
6	IO_L05N_6	AG28				
6	IO_L06P_6	AL33				
6	IO_L06N_6	AL34				
6	IO_L15P_6	AG29	NC			
6	IO_L15N_6/VREF_6	AG30	NC			
6	IO_L16P_6	AK33	NC			
6	IO_L16N_6	AK34	NC			
6	IO_L17P_6	AF27	NC			
6	IO_L17N_6	AF28	NC			
6	IO_L18P_6	AJ33	NC			
6	IO_L18N_6	AJ34	NC			
6	IO_L19P_6	AH31	NC			
6	IO_L19N_6	AH32	NC			
6	IO_L20P_6	AD25	NC			
6	IO_L20N_6	AD26	NC			
6	IO_L21P_6	AG31	NC			
6	IO_L21N_6/VREF_6	AG32	NC			
6	IO_L22P_6	AF29	NC			
6	IO_L22N_6	AF30	NC			
6	IO_L23P_6	AE27	NC			
6	IO_L23N_6	AE28	NC			
6	IO_L24P_6	AH33	NC			
6	IO_L24N_6	AH34	NC			
6	IO_L31P_6	AF31				
6	IO_L31N_6	AF32				
6	IO_L32P_6	AC25				
6	IO_L32N_6	AC26				
6	IO_L33P_6	AG33				
6	IO_L33N_6/VREF_6	AG34				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 757/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 757 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
6	IO_L34P_6	AE30				
6	IO_L34N_6	AE31				
6	IO_L35P_6	AD27				
6	IO_L35N_6	AD28				
6	IO_L36P_6	AF33				
6	IO_L36N_6	AE33				
6	IO_L37P_6	AD29				
6	IO_L37N_6	AD30				
6	IO_L38P_6	AB25				
6	IO_L38N_6	AB26				
6	IO_L39P_6	AD31				
6	IO_L39N_6/VREF_6	AD32				
6	IO_L40P_6	AC28				
6	IO_L40N_6	AC29				
6	IO_L41P_6	AB27				
6	IO_L41N_6	AB28				
6	IO_L42P_6	AE34				
6	IO_L42N_6	AD34				
6	IO_L43P_6	AC31				
6	IO_L43N_6	AC32				
6	IO_L44P_6	AA25				
6	IO_L44N_6	AA26				
6	IO_L45P_6	AD33				
6	IO_L45N_6/VREF_6	AC33				
6	IO_L46P_6	AB29				
6	IO_L46N_6	AB30				
6	IO_L47P_6	AA27				
6	IO_L47N_6	AA28				
6	IO_L48P_6	AB31				
6	IO_L48N_6	AB32				
6	IO_L49P_6	AA29				
6	IO_L49N_6	AA30				
6	IO_L50P_6	Y25				
6	IO_L50N_6	Y26				
6	IO_L51P_6	AC34				
6	IO_L51N_6/VREF_6	AB34				
6	IO_L52P_6	AA31				
6	IO_L52N_6	AA32				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 758 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
6	IO_L53P_6	W25				
6	IO_L53N_6	W26				
6	IO_L54P_6	AB33				
6	IO_L54N_6	AA33				
6	IO_L55P_6	Y28				
6	IO_L55N_6	Y29				
6	IO_L56P_6	W27				
6	IO_L56N_6	W28				
6	IO_L57P_6	Y31				
6	IO_L57N_6/VREF_6	Y32				
6	IO_L58P_6	W29				
6	IO_L58N_6	W30				
6	IO_L59P_6	W24				
6	IO_L59N_6	V24				
6	IO_L60P_6	AA34				
6	IO_L60N_6	Y34				
6	IO_L85P_6	W31				
6	IO_L85N_6	W32				
6	IO_L86P_6	V25				
6	IO_L86N_6	V26				
6	IO_L87P_6	Y33				
6	IO_L87N_6/VREF_6	W33				
6	IO_L88P_6	V29				
6	IO_L88N_6	V30				
6	IO_L89P_6	V27				
6	IO_L89N_6	V28				
6	IO_L90P_6	V31				
6	IO_L90N_6	V32				
7	IO_L90P_7	U32				
7	IO_L90N_7	U31				
7	IO_L89P_7	U28				
7	IO_L89N_7	U27				
7	IO_L88P_7	V33				
7	IO_L88N_7/VREF_7	U33				
7	IO_L87P_7	U30				
7	IO_L87N_7	U29				
7	IO_L86P_7	U26				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 759/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 759 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
7	IO_L86N_7	U25				
7	IO_L85P_7	T32				
7	IO_L85N_7	T31				
7	IO_L60P_7	T30				
7	IO_L60N_7	T29				
7	IO_L59P_7	T28				
7	IO_L59N_7	T27				
7	IO_L58P_7	T33				
7	IO_L58N_7/VREF_7	R33				
7	IO_L57P_7	R32				
7	IO_L57N_7	R31				
7	IO_L56P_7	T26				
7	IO_L56N_7	T25				
7	IO_L55P_7	R34				
7	IO_L55N_7	P34				
7	IO_L54P_7	R29				
7	IO_L54N_7	R28				
7	IO_L53P_7	U24				
7	IO_L53N_7	T24				
7	IO_L52P_7	P32				
7	IO_L52N_7/VREF_7	P31				
7	IO_L51P_7	P30				
7	IO_L51N_7	P29				
7	IO_L50P_7	R26				
7	IO_L50N_7	R25				
7	IO_L49P_7	P33				
7	IO_L49N_7	N33				
7	IO_L48P_7	N32				
7	IO_L48N_7	N31				
7	IO_L47P_7	P28				
7	IO_L47N_7	P27				
7	IO_L46P_7	N34				
7	IO_L46N_7/VREF_7	M34				
7	IO_L45P_7	N30				
7	IO_L45N_7	N29				
7	IO_L44P_7	P26				
7	IO_L44N_7	P25				
7	IO_L43P_7	M32				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 760 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
7	IO_L43N_7	M31				
7	IO_L42P_7	L32				
7	IO_L42N_7	L31				
7	IO_L41P_7	N28				
7	IO_L41N_7	N27				
7	IO_L40P_7	M33				
7	IO_L40N_7/VREF_7	L33				
7	IO_L39P_7	M29				
7	IO_L39N_7	M28				
7	IO_L38P_7	N26				
7	IO_L38N_7	N25				
7	IO_L37P_7	L34				
7	IO_L37N_7	K34				
7	IO_L36P_7	L30				
7	IO_L36N_7	L29				
7	IO_L35P_7	L28				
7	IO_L35N_7	L27				
7	IO_L34P_7	K33				
7	IO_L34N_7/VREF_7	J33				
7	IO_L33P_7	K31				
7	IO_L33N_7	K30				
7	IO_L32P_7	M26				
7	IO_L32N_7	M25				
7	IO_L31P_7	H34				
7	IO_L31N_7	H33				
7	IO_L24P_7	H32	NC			
7	IO_L24N_7	H31	NC			
7	IO_L23P_7	K28	NC			
7	IO_L23N_7	K27	NC			
7	IO_L22P_7	J32	NC			
7	IO_L22N_7/VREF_7	J31	NC			
7	IO_L21P_7	J30	NC			
7	IO_L21N_7	J29	NC			
7	IO_L20P_7	G34	NC			
7	IO_L20N_7	G33	NC			
7	IO_L19P_7	H30	NC			
7	IO_L19N_7	H29	NC			
7	IO_L18P_7	L26	NC			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 761/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 761 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
7	IO_L18N_7	L25	NC			
7	IO_L17P_7	F34	NC			
7	IO_L17N_7	F33	NC			
7	IO_L16P_7	G30	NC			
7	IO_L16N_7/VREF_7	G29	NC			
7	IO_L15P_7	G32	NC			
7	IO_L15N_7	G31	NC			
7	IO_L06P_7	F31				
7	IO_L06N_7	F30				
7	IO_L05P_7	J28				
7	IO_L05N_7	J27				
7	IO_L04P_7	E34				
7	IO_L04N_7/VREF_7	E33				
7	IO_L03P_7	E32				
7	IO_L03N_7	E31				
7	IO_L02P_7	F28				
7	IO_L02N_7	F27				
7	IO_L01P_7/VRN_7	D34				
7	IO_L01N_7/VRP_7	D33				
0	VCCO_0	C29				
0	VCCO_0	E20				
0	VCCO_0	F25				
0	VCCO_0	L20				
0	VCCO_0	L21				
0	VCCO_0	L22				
0	VCCO_0	L23				
0	VCCO_0	M18				
0	VCCO_0	M19				
0	VCCO_0	M20				
0	VCCO_0	M21				
0	VCCO_0	M22				
1	VCCO_1	C6				
1	VCCO_1	E15				
1	VCCO_1	F10				
1	VCCO_1	L12				
1	VCCO_1	L13				
1	VCCO_1	L14				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 762 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
1	VCCO_1	L15				
1	VCCO_1	M13				
1	VCCO_1	M14				
1	VCCO_1	M15				
1	VCCO_1	M16				
1	VCCO_1	M17				
2	VCCO_2	F3				
2	VCCO_2	K6				
2	VCCO_2	M11				
2	VCCO_2	N11				
2	VCCO_2	N12				
2	VCCO_2	P11				
2	VCCO_2	P12				
2	VCCO_2	R5				
2	VCCO_2	R11				
2	VCCO_2	R12				
2	VCCO_2	T12				
2	VCCO_2	U12				
3	VCCO_3	V12				
3	VCCO_3	W12				
3	VCCO_3	Y5				
3	VCCO_3	Y11				
3	VCCO_3	Y12				
3	VCCO_3	AA11				
3	VCCO_3	AA12				
3	VCCO_3	AB11				
3	VCCO_3	AB12				
3	VCCO_3	AC11				
3	VCCO_3	AE6				
3	VCCO_3	AJ3				
4	VCCO_4	AC13				
4	VCCO_4	AC14				
4	VCCO_4	AC15				
4	VCCO_4	AC16				
4	VCCO_4	AC17				
4	VCCO_4	AD12				
4	VCCO_4	AD13				
4	VCCO_4	AD14				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 763/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 763 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
4	VCCO_4	AD15				
4	VCCO_4	AJ10				
4	VCCO_4	AK15				
4	VCCO_4	AM6				
5	VCCO_5	AC18				
5	VCCO_5	AC19				
5	VCCO_5	AC20				
5	VCCO_5	AC21				
5	VCCO_5	AC22				
5	VCCO_5	AD20				
5	VCCO_5	AD21				
5	VCCO_5	AD22				
5	VCCO_5	AD23				
5	VCCO_5	AJ25				
5	VCCO_5	AK20				
5	VCCO_5	AM29				
6	VCCO_6	V23				
6	VCCO_6	W23				
6	VCCO_6	Y23				
6	VCCO_6	Y24				
6	VCCO_6	Y30				
6	VCCO_6	AA23				
6	VCCO_6	AA24				
6	VCCO_6	AB23				
6	VCCO_6	AB24				
6	VCCO_6	AC24				
6	VCCO_6	AE29				
6	VCCO_6	AJ32				
7	VCCO_7	F32				
7	VCCO_7	K29				
7	VCCO_7	M24				
7	VCCO_7	N23				
7	VCCO_7	N24				
7	VCCO_7	P23				
7	VCCO_7	P24				
7	VCCO_7	R23				
7	VCCO_7	R24				
7	VCCO_7	R30				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 764 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
7	VCCO_7	T23				
7	VCCO_7	U23				
N/A	CCLK	AE9				
N/A	PROG_B	J26				
N/A	DONE	AE10				
N/A	M0	AF26				
N/A	M1	AE26				
N/A	M2	AE25				
N/A	TCK	J9				
N/A	TDI	H28				
N/A	TDO	H7				
N/A	TMS	K10				
N/A	PWRDWN_B	AF9				
N/A	HSWAP_EN	K25				
N/A	RSVD	G8				
N/A	VBATT	K9				
N/A	DXP	K26				
N/A	DXN	G27				
N/A	AVCCAUXTX2	B32	NC	NC		
N/A	VTTXPAD2	B33	NC	NC		
N/A	TXNPAD2	A33	NC	NC		
N/A	TXPPAD2	A32	NC	NC		
N/A	GNDA2	C30	NC	NC		
N/A	RXPPAD2	A31	NC	NC		
N/A	RXNPAD2	A30	NC	NC		
N/A	VTRXPAD2	B31	NC	NC		
N/A	AVCCAUXRX2	B30	NC	NC		
N/A	AVCCAUXTX4	B28				
N/A	VTTXPAD4	B29				
N/A	TXNPAD4	A29				
N/A	TXPPAD4	A28				
N/A	GNDA4	C27				
N/A	RXPPAD4	A27				
N/A	RXNPAD4	A26				
N/A	VTRXPAD4	B27				
N/A	AVCCAUXRX4	B26				
N/A	AVCCAUXTX5	B24	NC	NC	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 765/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 765 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	VTTXPAD5	B25	NC	NC	NC	
N/A	TXNPAD5	A25	NC	NC	NC	
N/A	TXPPAD5	A24	NC	NC	NC	
N/A	GNDA5	C23	NC	NC	NC	
N/A	RXPPAD5	A23	NC	NC	NC	
N/A	RXNPAD5	A22	NC	NC	NC	
N/A	VTRXPAD5	B23	NC	NC	NC	
N/A	AVCCAUXRX5	B22	NC	NC	NC	
N/A	AVCCAUXTX6	B20				
N/A	VTTXPAD6	B21				
N/A	TXNPAD6	A21				
N/A	TXPPAD6	A20				
N/A	GNDA6	C20				
N/A	RXPPAD6	A19				
N/A	RXNPAD6	A18				
N/A	VTRXPAD6	B19				
N/A	AVCCAUXRX6	B18				
N/A	AVCCAUXTX7	B16				
N/A	VTTXPAD7	B17				
N/A	TXNPAD7	A17				
N/A	TXPPAD7	A16				
N/A	GNDA7	C15				
N/A	RXPPAD7	A15				
N/A	RXNPAD7	A14				
N/A	VTRXPAD7	B15				
N/A	AVCCAUXRX7	B14				
N/A	AVCCAUXTX8	B12	NC	NC	NC	
N/A	VTTXPAD8	B13	NC	NC	NC	
N/A	TXNPAD8	A13	NC	NC	NC	
N/A	TXPPAD8	A12	NC	NC	NC	
N/A	GNDA8	C12	NC	NC	NC	
N/A	RXPPAD8	A11	NC	NC	NC	
N/A	RXNPAD8	A10	NC	NC	NC	
N/A	VTRXPAD8	B11	NC	NC	NC	
N/A	AVCCAUXRX8	B10	NC	NC	NC	
N/A	AVCCAUXTX9	B8				
N/A	VTTXPAD9	B9				
N/A	TXNPAD9	A9				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 766 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	TXPPAD9	A8				
N/A	GNDA9	C8				
N/A	RXPPAD9	A7				
N/A	RXNPAD9	A6				
N/A	VTRXPAD9	B7				
N/A	AVCCAUXRX9	B6				
N/A	AVCCAUXTX11	B4	NC	NC		
N/A	VTTXPAD11	B5	NC	NC		
N/A	TXNPAD11	A5	NC	NC		
N/A	TXPPAD11	A4	NC	NC		
N/A	GNDA11	C5	NC	NC		
N/A	RXPPAD11	A3	NC	NC		
N/A	RXNPAD11	A2	NC	NC		
N/A	VTRXPAD11	B3	NC	NC		
N/A	AVCCAUXRX11	B2	NC	NC		
N/A	AVCCAUXRX14	AN2	NC	NC		
N/A	VTRXPAD14	AN3	NC	NC		
N/A	RXNPAD14	AP2	NC	NC		
N/A	RXPPAD14	AP3	NC	NC		
N/A	GNDA14	AM5	NC	NC		
N/A	TXPPAD14	AP4	NC	NC		
N/A	TXNPAD14	AP5	NC	NC		
N/A	VTTXPAD14	AN5	NC	NC		
N/A	AVCCAUXTX14	AN4	NC	NC		
N/A	AVCCAUXRX16	AN6				
N/A	VTRXPAD16	AN7				
N/A	RXNPAD16	AP6				
N/A	RXPPAD16	AP7				
N/A	GNDA16	AM8				
N/A	TXPPAD16	AP8				
N/A	TXNPAD16	AP9				
N/A	VTTXPAD16	AN9				
N/A	AVCCAUXTX16	AN8				
N/A	AVCCAUXRX17	AN10	NC	NC	NC	
N/A	VTRXPAD17	AN11	NC	NC	NC	
N/A	RXNPAD17	AP10	NC	NC	NC	
N/A	RXPPAD17	AP11	NC	NC	NC	
N/A	GNDA17	AM12	NC	NC	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 767 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	TXPPAD17	AP12	NC	NC	NC	
N/A	TXNPAD17	AP13	NC	NC	NC	
N/A	VTTXPAD17	AN13	NC	NC	NC	
N/A	AVCCAUXTX17	AN12	NC	NC	NC	
N/A	AVCCAUXRX18	AN14				
N/A	VTRXPAD18	AN15				
N/A	RXNPAD18	AP14				
N/A	RXPPAD18	AP15				
N/A	GNDA18	AM15				
N/A	TXPPAD18	AP16				
N/A	TXNPAD18	AP17				
N/A	VTTXPAD18	AN17				
N/A	AVCCAUXTX18	AN16				
N/A	AVCCAUXRX19	AN18				
N/A	VTRXPAD19	AN19				
N/A	RXNPAD19	AP18				
N/A	RXPPAD19	AP19				
N/A	GNDA19	AM20				
N/A	TXPPAD19	AP20				
N/A	TXNPAD19	AP21				
N/A	VTTXPAD19	AN21				
N/A	AVCCAUXTX19	AN20				
N/A	AVCCAUXRX20	AN22	NC	NC	NC	
N/A	VTRXPAD20	AN23	NC	NC	NC	
N/A	RXNPAD20	AP22	NC	NC	NC	
N/A	RXPPAD20	AP23	NC	NC	NC	
N/A	GNDA20	AM23	NC	NC	NC	
N/A	TXPPAD20	AP24	NC	NC	NC	
N/A	TXNPAD20	AP25	NC	NC	NC	
N/A	VTTXPAD20	AN25	NC	NC	NC	
N/A	AVCCAUXTX20	AN24	NC	NC	NC	
N/A	AVCCAUXRX21	AN26				
N/A	VTRXPAD21	AN27				
N/A	RXNPAD21	AP26				
N/A	RXPPAD21	AP27				
N/A	GNDA21	AM27				
N/A	TXPPAD21	AP28				
N/A	TXNPAD21	AP29				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 768/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 768 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	VTTXPAD21	AN29				
N/A	AVCCAUXTX21	AN28				
N/A	AVCCAUXRX23	AN30	NC	NC		
N/A	VTRXPAD23	AN31	NC	NC		
N/A	RXNPAD23	AP30	NC	NC		
N/A	RXPPAD23	AP31	NC	NC		
N/A	GNDA23	AM30	NC	NC		
N/A	TXPPAD23	AP32	NC	NC		
N/A	TXNPAD23	AP33	NC	NC		
N/A	VTTXPAD23	AN33	NC	NC		
N/A	AVCCAUXTX23	AN32	NC	NC		
N/A	VCCINT	L11				
N/A	VCCINT	L24				
N/A	VCCINT	M12				
N/A	VCCINT	M23				
N/A	VCCINT	N13				
N/A	VCCINT	N14				
N/A	VCCINT	N15				
N/A	VCCINT	N16				
N/A	VCCINT	N17				
N/A	VCCINT	N18				
N/A	VCCINT	N19				
N/A	VCCINT	N20				
N/A	VCCINT	N21				
N/A	VCCINT	N22				
N/A	VCCINT	P13				
N/A	VCCINT	P22				
N/A	VCCINT	R13				
N/A	VCCINT	R22				
N/A	VCCINT	T13				
N/A	VCCINT	T22				
N/A	VCCINT	U13				
N/A	VCCINT	U22				
N/A	VCCINT	V13				
N/A	VCCINT	V22				
N/A	VCCINT	W13				
N/A	VCCINT	W22				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 769/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 769 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	VCCINT	Y13				
N/A	VCCINT	Y22				
N/A	VCCINT	AA13				
N/A	VCCINT	AA22				
N/A	VCCINT	AB13				
N/A	VCCINT	AB14				
N/A	VCCINT	AB15				
N/A	VCCINT	AB16				
N/A	VCCINT	AB17				
N/A	VCCINT	AB18				
N/A	VCCINT	AB19				
N/A	VCCINT	AB20				
N/A	VCCINT	AB21				
N/A	VCCINT	AB22				
N/A	VCCINT	AC12				
N/A	VCCINT	AC23				
N/A	VCCINT	AD11				
N/A	VCCINT	AD24				
N/A	VCCAUX	C3				
N/A	VCCAUX	C4				
N/A	VCCAUX	C17				
N/A	VCCAUX	C18				
N/A	VCCAUX	C31				
N/A	VCCAUX	C32				
N/A	VCCAUX	D3				
N/A	VCCAUX	D32				
N/A	VCCAUX	U1				
N/A	VCCAUX	V1				
N/A	VCCAUX	U34				
N/A	VCCAUX	V34				
N/A	VCCAUX	AL3				
N/A	VCCAUX	AL32				
N/A	VCCAUX	AM3				
N/A	VCCAUX	AM4				
N/A	VCCAUX	AM17				
N/A	VCCAUX	AM18				
N/A	VCCAUX	AM31				
N/A	VCCAUX	AM32				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 770 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	GND	AF34				
N/A	GND	B34				
N/A	GND	C1				
N/A	GND	C2				
N/A	GND	C10				
N/A	GND	C16				
N/A	GND	C19				
N/A	GND	C25				
N/A	GND	C33				
N/A	GND	C34				
N/A	GND	D4				
N/A	GND	D31				
N/A	GND	E5				
N/A	GND	E12				
N/A	GND	E23				
N/A	GND	E30				
N/A	GND	F6				
N/A	GND	F29				
N/A	GND	G7				
N/A	GND	G28				
N/A	GND	B1				
N/A	GND	H8				
N/A	GND	H12				
N/A	GND	H15				
N/A	GND	H20				
N/A	GND	J1				
N/A	GND	H27				
N/A	GND	AF1				
N/A	GND	K3				
N/A	GND	K32				
N/A	GND	M5				
N/A	GND	M8				
N/A	GND	M27				
N/A	GND	M30				
N/A	GND	P14				
N/A	GND	P15				
N/A	GND	P16				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 771/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 771 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	GND	P17				
N/A	GND	P18				
N/A	GND	P19				
N/A	GND	P20				
N/A	GND	P21				
N/A	GND	R8				
N/A	GND	R14				
N/A	GND	R15				
N/A	GND	R16				
N/A	GND	R17				
N/A	GND	R18				
N/A	GND	R19				
N/A	GND	R20				
N/A	GND	R21				
N/A	GND	R27				
N/A	GND	T1				
N/A	GND	T14				
N/A	GND	T15				
N/A	GND	T16				
N/A	GND	T17				
N/A	GND	T18				
N/A	GND	T19				
N/A	GND	T20				
N/A	GND	T21				
N/A	GND	T34				
N/A	GND	U14				
N/A	GND	U15				
N/A	GND	U16				
N/A	GND	U17				
N/A	GND	U18				
N/A	GND	U19				
N/A	GND	U20				
N/A	GND	U21				
N/A	GND	V14				
N/A	GND	V15				
N/A	GND	V16				
N/A	GND	V17				
N/A	GND	V18				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 772 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**

Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	GND	V19				
N/A	GND	V20				
N/A	GND	V21				
N/A	GND	W1				
N/A	GND	W14				
N/A	GND	W15				
N/A	GND	W16				
N/A	GND	W17				
N/A	GND	W18				
N/A	GND	W19				
N/A	GND	W20				
N/A	GND	W21				
N/A	GND	W34				
N/A	GND	Y8				
N/A	GND	Y14				
N/A	GND	Y15				
N/A	GND	Y16				
N/A	GND	Y17				
N/A	GND	Y18				
N/A	GND	Y19				
N/A	GND	Y20				
N/A	GND	Y21				
N/A	GND	Y27				
N/A	GND	AA14				
N/A	GND	AA15				
N/A	GND	AA16				
N/A	GND	AA17				
N/A	GND	AA18				
N/A	GND	AA19				
N/A	GND	AA20				
N/A	GND	AA21				
N/A	GND	AC5				
N/A	GND	AC8				
N/A	GND	AC27				
N/A	GND	AC30				
N/A	GND	AE3				
N/A	GND	AE32				
N/A	GND	H23				

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 773/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 773 of 947

Table 10: **FF1152 — XC2VP20, XC2VP30, XC2VP40, and XC2VP50**


Bank	Pin Description	Pin Number	No Connects			
			XC2VP20	XC2VP30	XC2VP40	XC2VP50
N/A	GND	AG8				
N/A	GND	AG12				
N/A	GND	AG15				
N/A	GND	AG20				
N/A	GND	AG23				
N/A	GND	AG27				
N/A	GND	J34				
N/A	GND	AH7				
N/A	GND	AH28				
N/A	GND	AJ6				
N/A	GND	AJ29				
N/A	GND	AK5				
N/A	GND	AK12				
N/A	GND	AK23				
N/A	GND	AK30				
N/A	GND	AL4				
N/A	GND	AL31				
N/A	GND	AM1				
N/A	GND	AM2				
N/A	GND	AM10				
N/A	GND	AM16				
N/A	GND	AM19				
N/A	GND	AM25				
N/A	GND	AM33				
N/A	GND	AM34				
N/A	GND	AN1				
N/A	GND	AN34				

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 774 of 947

FF1152 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

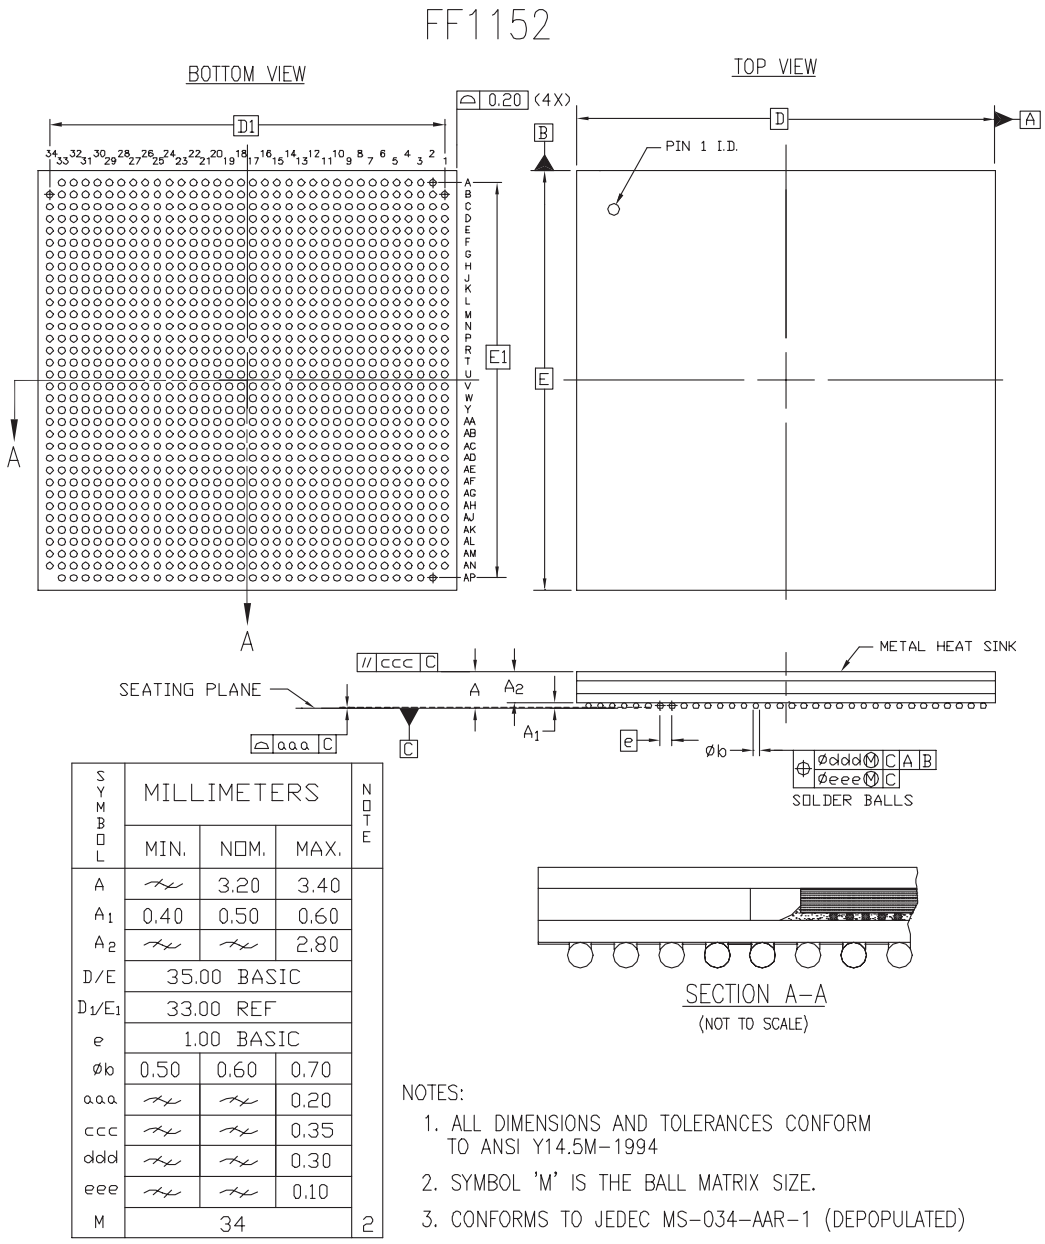

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.40	
A_1	0.40	0.50	0.60	
A_2			2.80	
D/E	35.00 BASIC			
D_1/E_1	33.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	34			2

NOTES:
1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAR–1 (DEPOPULATED)

Figure 6: **FF1152 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 775/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 775 of 947

FF1148 Flip-Chip Fine-Pitch BGA Package

As shown in Table 11, XC2VP40 and XC2VP50 Virtex-II Pro devices are available in the FF1148 flip-chip fine-pitch BGA package. Pins in each of these devices are the same, except for the differences shown in the No Connect column. Following this table are the FF1148 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
0	IO_L01N_0/VRP_0	E25		
0	IO_L01P_0/VRN_0	F25		
0	IO_L02N_0	J24		
0	IO_L02P_0	K24		
0	IO_L03N_0	C25		
0	IO_L03P_0/VREF_0	D25		
0	IO_L05_0/No_Pair	G25		
0	IO_L06N_0	A25		
0	IO_L06P_0	B25		
0	IO_L07N_0	G24		
0	IO_L07P_0	G23		
0	IO_L08N_0	H23		
0	IO_L08P_0	H22		
0	IO_L09N_0	E24		
0	IO_L09P_0/VREF_0	F24		
0	IO_L19N_0	C24		
0	IO_L19P_0	C23		
0	IO_L20N_0	J23		
0	IO_L20P_0	K23		
0	IO_L21N_0	A24		
0	IO_L21P_0	B24		
0	IO_L25N_0	E23		
0	IO_L25P_0	F23		
0	IO_L26N_0	K22		
0	IO_L26P_0	L22		
0	IO_L27N_0	D23		
0	IO_L27P_0/VREF_0	D22		
0	IO_L37N_0	A23		
0	IO_L37P_0	B23		
0	IO_L38N_0	J21		
0	IO_L38P_0	J20		
0	IO_L39N_0	F22		
0	IO_L39P_0	G22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 776 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
0	IO_L43N_0	B22		
0	IO_L43P_0	C22		
0	IO_L44N_0	K21		
0	IO_L44P_0	L21		
0	IO_L45N_0	G21		
0	IO_L45P_0/VREF_0	H21		
0	IO_L46N_0	E21		
0	IO_L46P_0	F21		
0	IO_L47N_0	K20		
0	IO_L47P_0	L20		
0	IO_L48N_0	C21		
0	IO_L48P_0	D21		
0	IO_L49N_0	A21		
0	IO_L49P_0	B21		
0	IO_L50_0/No_Pair	G20		
0	IO_L53_0/No_Pair	H19		
0	IO_L54N_0	E20		
0	IO_L54P_0	F20		
0	IO_L55N_0	C20		
0	IO_L55P_0	D19		
0	IO_L56N_0	K19		
0	IO_L56P_0	L19		
0	IO_L57N_0	A20		
0	IO_L57P_0/VREF_0	B20		
0	IO_L66N_0	F19	NC	
0	IO_L66P_0/VREF_0	G19	NC	
0	IO_L67N_0	B19		
0	IO_L67P_0	C19		
0	IO_L68N_0	H18		
0	IO_L68P_0	J18		
0	IO_L69N_0	F18		
0	IO_L69P_0/VREF_0	G18		
0	IO_L73N_0	D18		
0	IO_L73P_0	E18		
0	IO_L74N_0/GCLK7P	K18		
0	IO_L74P_0/GCLK6S	L18		
0	IO_L75N_0/GCLK5P	B18		
0	IO_L75P_0/GCLK4S	C18		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 777 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
1	IO_L75N_1/GCLK3P	C17		
1	IO_L75P_1/GCLK2S	B17		
1	IO_L74N_1/GCLK1P	L17		
1	IO_L74P_1/GCLK0S	K17		
1	IO_L73N_1	E17		
1	IO_L73P_1	D17		
1	IO_L69N_1/VREF_1	G17		
1	IO_L69P_1	F17		
1	IO_L68N_1	J17		
1	IO_L68P_1	H17		
1	IO_L67N_1	C16		
1	IO_L67P_1	B16		
1	IO_L66N_1/VREF_1	G16	NC	
1	IO_L66P_1	F16	NC	
1	IO_L57N_1/VREF_1	B15		
1	IO_L57P_1	A15		
1	IO_L56N_1	L16		
1	IO_L56P_1	K16		
1	IO_L55N_1	D16		
1	IO_L55P_1	C15		
1	IO_L54N_1	F15		
1	IO_L54P_1	E15		
1	IO_L53_1/No_Pair	H16		
1	IO_L50_1/No_Pair	G15		
1	IO_L49N_1	B14		
1	IO_L49P_1	A14		
1	IO_L48N_1	D14		
1	IO_L48P_1	C14		
1	IO_L47N_1	L15		
1	IO_L47P_1	K15		
1	IO_L46N_1	F14		
1	IO_L46P_1	E14		
1	IO_L45N_1/VREF_1	H14		
1	IO_L45P_1	G14		
1	IO_L44N_1	L14		
1	IO_L44P_1	K14		
1	IO_L43N_1	C13		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 778 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
1	IO_L43P_1	B13		
1	IO_L39N_1	G13		
1	IO_L39P_1	F13		
1	IO_L38N_1	J15		
1	IO_L38P_1	J14		
1	IO_L37N_1	B12		
1	IO_L37P_1	A12		
1	IO_L27N_1/VREF_1	D13		
1	IO_L27P_1	D12		
1	IO_L26N_1	L13		
1	IO_L26P_1	K13		
1	IO_L25N_1	F12		
1	IO_L25P_1	E12		
1	IO_L21N_1	B11		
1	IO_L21P_1	A11		
1	IO_L20N_1	K12		
1	IO_L20P_1	J12		
1	IO_L19N_1	C12		
1	IO_L19P_1	C11		
1	IO_L09N_1/VREF_1	F11		
1	IO_L09P_1	E11		
1	IO_L08N_1	H13		
1	IO_L08P_1	H12		
1	IO_L07N_1	G12		
1	IO_L07P_1	G11		
1	IO_L06N_1	B10		
1	IO_L06P_1	A10		
1	IO_L05_1/No_Pair	G10		
1	IO_L03N_1/VREF_1	D10		
1	IO_L03P_1	C10		
1	IO_L02N_1	K11		
1	IO_L02P_1	J11		
1	IO_L01N_1/VRP_1	F10		
1	IO_L01P_1/VRN_1	E10		
2	IO_L01N_2/VRP_2	B8		
2	IO_L01P_2/VRN_2	B9		
2	IO_L02N_2	C9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 779/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 779 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
2	IO_L02P_2	D9		
2	IO_L03N_2	B7		
2	IO_L03P_2	A7		
2	IO_L04N_2/VREF_2	B6		
2	IO_L04P_2	A6		
2	IO_L05N_2	E8		
2	IO_L05P_2	D8		
2	IO_L06N_2	B4		
2	IO_L06P_2	A4		
2	IO_L07N_2	B3		
2	IO_L07P_2	A3		
2	IO_L08N_2	H7		
2	IO_L08P_2	H8		
2	IO_L09N_2	C6		
2	IO_L09P_2	C7		
2	IO_L10N_2/VREF_2	C5		
2	IO_L10P_2	B5		
2	IO_L11N_2	K8		
2	IO_L11P_2	J8		
2	IO_L12N_2	C1		
2	IO_L12P_2	C2		
2	IO_L13N_2	E7		
2	IO_L13P_2	D7		
2	IO_L14N_2	J6		
2	IO_L14P_2	J7		
2	IO_L15N_2	D5		
2	IO_L15P_2	D6		
2	IO_L16N_2/VREF_2	E4		
2	IO_L16P_2	D4		
2	IO_L17N_2	L9		
2	IO_L17P_2	K9		
2	IO_L18N_2	E3		
2	IO_L18P_2	D3		
2	IO_L19N_2	D1		
2	IO_L19P_2	D2		
2	IO_L20N_2	K7		
2	IO_L20P_2	L7		
2	IO_L21N_2	F6		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 780 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
2	IO_L21P_2	E6		
2	IO_L22N_2/VREF_2	F7		
2	IO_L22P_2	F8		
2	IO_L23N_2	M10		
2	IO_L23P_2	L10		
2	IO_L24N_2	G5		
2	IO_L24P_2	F5		
2	IO_L25N_2	F3		
2	IO_L25P_2	F4		
2	IO_L26N_2	M8		
2	IO_L26P_2	M9		
2	IO_L27N_2	F1		
2	IO_L27P_2	F2		
2	IO_L28N_2/VREF_2	G6		
2	IO_L28P_2	G7		
2	IO_L29N_2	M7		
2	IO_L29P_2	N8		
2	IO_L30N_2	G3		
2	IO_L30P_2	H4		
2	IO_L31N_2	G1		
2	IO_L31P_2	G2		
2	IO_L32N_2	N10		
2	IO_L32P_2	N11		
2	IO_L33N_2	H5		
2	IO_L33P_2	H6		
2	IO_L34N_2/VREF_2	H2		
2	IO_L34P_2	H3		
2	IO_L35N_2	N6		
2	IO_L35P_2	N7		
2	IO_L36N_2	K4		
2	IO_L36P_2	J4		
2	IO_L37N_2	J2		
2	IO_L37P_2	J3		
2	IO_L38N_2	P10		
2	IO_L38P_2	P11		
2	IO_L39N_2	K5		
2	IO_L39P_2	K6		
2	IO_L40N_2/VREF_2	L3		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 781/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 781 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
2	IO_L40P_2	K3		
2	IO_L41N_2	R9		
2	IO_L41P_2	P9		
2	IO_L42N_2	K1		
2	IO_L42P_2	K2		
2	IO_L43N_2	L5		
2	IO_L43P_2	L6		
2	IO_L44N_2	P7		
2	IO_L44P_2	P8		
2	IO_L45N_2	L1		
2	IO_L45P_2	L2		
2	IO_L46N_2/VREF_2	M5		
2	IO_L46P_2	M6		
2	IO_L47N_2	R10		
2	IO_L47P_2	R11		
2	IO_L48N_2	M3		
2	IO_L48P_2	M4		
2	IO_L49N_2	M1		
2	IO_L49P_2	M2		
2	IO_L50N_2	R7		
2	IO_L50P_2	T8		
2	IO_L51N_2	P4		
2	IO_L51P_2	N4		
2	IO_L52N_2/VREF_2	N2		
2	IO_L52P_2	N3		
2	IO_L53N_2	T10		
2	IO_L53P_2	T11		
2	IO_L54N_2	P5		
2	IO_L54P_2	P6		
2	IO_L55N_2	R3		
2	IO_L55P_2	P3		
2	IO_L56N_2	T6		
2	IO_L56P_2	T7		
2	IO_L57N_2	P1		
2	IO_L57P_2	P2		
2	IO_L58N_2/VREF_2	R5		
2	IO_L58P_2	R6		
2	IO_L59N_2	U10		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 782 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
2	IO_L59P_2	U11		
2	IO_L60N_2	R1		
2	IO_L60P_2	R2		
2	IO_L85N_2	T3		
2	IO_L85P_2	T4		
2	IO_L86N_2	U8		
2	IO_L86P_2	U9		
2	IO_L87N_2	U2		
2	IO_L87P_2	T2		
2	IO_L88N_2/VREF_2	U4		
2	IO_L88P_2	U5		
2	IO_L89N_2	U6		
2	IO_L89P_2	U7		
2	IO_L90N_2	V3		
2	IO_L90P_2	U3		
3	IO_L90N_3	V6		
3	IO_L90P_3	V7		
3	IO_L89N_3	V10		
3	IO_L89P_3	V11		
3	IO_L88N_3	V4		
3	IO_L88P_3	V5		
3	IO_L87N_3/VREF_3	V2		
3	IO_L87P_3	W2		
3	IO_L86N_3	V8		
3	IO_L86P_3	V9		
3	IO_L85N_3	W6		
3	IO_L85P_3	W7		
3	IO_L60N_3	W3		
3	IO_L60P_3	W4		
3	IO_L59N_3	W10		
3	IO_L59P_3	W11		
3	IO_L58N_3	Y5		
3	IO_L58P_3	Y6		
3	IO_L57N_3/VREF_3	Y3		
3	IO_L57P_3	AA3		
3	IO_L56N_3	W8		
3	IO_L56P_3	Y7		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 783/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 783 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
3	IO_L55N_3	Y1		
3	IO_L55P_3	Y2		
3	IO_L54N_3	AA5		
3	IO_L54P_3	AA6		
3	IO_L53N_3	Y10		
3	IO_L53P_3	Y11		
3	IO_L52N_3	AA4		
3	IO_L52P_3	AB4		
3	IO_L51N_3/VREF_3	AA1		
3	IO_L51P_3	AA2		
3	IO_L50N_3	Y9		
3	IO_L50P_3	AA9		
3	IO_L49N_3	AB6		
3	IO_L49P_3	AB7		
3	IO_L48N_3	AB2		
3	IO_L48P_3	AB3		
3	IO_L47N_3	AA10		
3	IO_L47P_3	AA11		
3	IO_L46N_3	AC5		
3	IO_L46P_3	AC6		
3	IO_L45N_3/VREF_3	AC3		
3	IO_L45P_3	AC4		
3	IO_L44N_3	AA7		
3	IO_L44P_3	AA8		
3	IO_L43N_3	AC1		
3	IO_L43P_3	AC2		
3	IO_L42N_3	AD5		
3	IO_L42P_3	AD6		
3	IO_L41N_3	AB10		
3	IO_L41P_3	AB11		
3	IO_L40N_3	AD3		
3	IO_L40P_3	AE3		
3	IO_L39N_3/VREF_3	AD1		
3	IO_L39P_3	AD2		
3	IO_L38N_3	AB8		
3	IO_L38P_3	AC7		
3	IO_L37N_3	AE5		
3	IO_L37P_3	AE6		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 784 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
3	IO_L36N_3	AE4		
3	IO_L36P_3	AF4		
3	IO_L35N_3	AC10		
3	IO_L35P_3	AD10		
3	IO_L34N_3	AE1		
3	IO_L34P_3	AE2		
3	IO_L33N_3/VREF_3	AF6		
3	IO_L33P_3	AF7		
3	IO_L32N_3	AC8		
3	IO_L32P_3	AC9		
3	IO_L31N_3	AF2		
3	IO_L31P_3	AF3		
3	IO_L30N_3	AG5		
3	IO_L30P_3	AG6		
3	IO_L29N_3	AD9		
3	IO_L29P_3	AE9		
3	IO_L28N_3	AG4		
3	IO_L28P_3	AH3		
3	IO_L27N_3/VREF_3	AG2		
3	IO_L27P_3	AG3		
3	IO_L26N_3	AD7		
3	IO_L26P_3	AE7		
3	IO_L25N_3	AH6		
3	IO_L25P_3	AH7		
3	IO_L24N_3	AH5		
3	IO_L24P_3	AJ5		
3	IO_L23N_3	AE8		
3	IO_L23P_3	AF8		
3	IO_L22N_3	AH1		
3	IO_L22P_3	AH2		
3	IO_L21N_3/VREF_3	AJ6		
3	IO_L21P_3	AK6		
3	IO_L20N_3	AG7		
3	IO_L20P_3	AG8		
3	IO_L19N_3	AJ3		
3	IO_L19P_3	AJ4		
3	IO_L18N_3	AJ1		
3	IO_L18P_3	AJ2		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 785/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 785 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
3	IO_L17N_3	AH9		
3	IO_L17P_3	AJ9		
3	IO_L16N_3	AK7		
3	IO_L16P_3	AL7		
3	IO_L15N_3/VREF_3	AK4		
3	IO_L15P_3	AL4		
3	IO_L14N_3	AJ7		
3	IO_L14P_3	AJ8		
3	IO_L13N_3	AK3		
3	IO_L13P_3	AL3		
3	IO_L12N_3	AL5		
3	IO_L12P_3	AL6		
3	IO_L11N_3	AK8		
3	IO_L11P_3	AL8		
3	IO_L10N_3	AL1		
3	IO_L10P_3	AL2		
3	IO_L09N_3/VREF_3	AM6		
3	IO_L09P_3	AM7		
3	IO_L08N_3	AL9		
3	IO_L08P_3	AM9		
3	IO_L07N_3	AM5		
3	IO_L07P_3	AN5		
3	IO_L06N_3	AM1		
3	IO_L06P_3	AM2		
3	IO_L05N_3	AN8		
3	IO_L05P_3	AN9		
3	IO_L04N_3	AN6		
3	IO_L04P_3	AP6		
3	IO_L03N_3/VREF_3	AN4		
3	IO_L03P_3	AP4		
3	IO_L02N_3	AN7		
3	IO_L02P_3	AP7		
3	IO_L01N_3/VRP_3	AN3		
3	IO_L01P_3/VRN_3	AP3		
4	IO_L01N_4/BUSY/DOUT(1)	AK10		
4	IO_L01P_4/INIT_B	AJ10		
4	IO_L02N_4/D0/DIN(1)	AF11		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 786 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
4	IO_L02P_4/D1	AE11		
4	IO_L03N_4/D2	AM10		
4	IO_L03P_4/D3	AL10		
4	IO_L05_4/No_Pair	AH10		
4	IO_L06N_4/VRP_4	AP10		
4	IO_L06P_4/VRN_4	AN10		
4	IO_L07N_4	AH11		
4	IO_L07P_4/VREF_4	AH12		
4	IO_L08N_4	AG12		
4	IO_L08P_4	AG13		
4	IO_L09N_4	AK11		
4	IO_L09P_4/VREF_4	AJ11		
4	IO_L19N_4	AM11		
4	IO_L19P_4	AM12		
4	IO_L20N_4	AF12		
4	IO_L20P_4	AE12		
4	IO_L21N_4	AP11		
4	IO_L21P_4	AN11		
4	IO_L25N_4	AK12		
4	IO_L25P_4	AJ12		
4	IO_L26N_4	AE13		
4	IO_L26P_4	AD13		
4	IO_L27N_4	AL12		
4	IO_L27P_4/VREF_4	AL13		
4	IO_L37N_4	AP12		
4	IO_L37P_4	AN12		
4	IO_L38N_4	AF14		
4	IO_L38P_4	AF15		
4	IO_L39N_4	AJ13		
4	IO_L39P_4	AH13		
4	IO_L43N_4	AN13		
4	IO_L43P_4	AM13		
4	IO_L44N_4	AE14		
4	IO_L44P_4	AD14		
4	IO_L45N_4	AH14		
4	IO_L45P_4/VREF_4	AG14		
4	IO_L46N_4	AK14		
4	IO_L46P_4	AJ14		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 787/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 787 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
4	IO_L47N_4	AE15		
4	IO_L47P_4	AD15		
4	IO_L48N_4	AM14		
4	IO_L48P_4	AL14		
4	IO_L49N_4	AP14		
4	IO_L49P_4	AN14		
4	IO_L50_4/No_Pair	AH15		
4	IO_L53_4/No_Pair	AG16		
4	IO_L54N_4	AK15		
4	IO_L54P_4	AJ15		
4	IO_L55N_4	AM15		
4	IO_L55P_4	AL16		
4	IO_L56N_4	AE16		
4	IO_L56P_4	AD16		
4	IO_L57N_4	AP15		
4	IO_L57P_4/VREF_4	AN15		
4	IO_L66N_4	AJ16	NC	
4	IO_L66P_4/VREF_4	AH16	NC	
4	IO_L67N_4	AN16		
4	IO_L67P_4	AM16		
4	IO_L68N_4	AG17		
4	IO_L68P_4	AF17		
4	IO_L69N_4	AJ17		
4	IO_L69P_4/VREF_4	AH17		
4	IO_L73N_4	AL17		
4	IO_L73P_4	AK17		
4	IO_L74N_4/GCLK3S	AE17		
4	IO_L74P_4/GCLK2P	AD17		
4	IO_L75N_4/GCLK1S	AN17		
4	IO_L75P_4/GCLK0P	AM17		
5	IO_L75N_5/GCLK7S	AM18		
5	IO_L75P_5/GCLK6P	AN18		
5	IO_L74N_5/GCLK5S	AD18		
5	IO_L74P_5/GCLK4P	AE18		
5	IO_L73N_5	AK18		
5	IO_L73P_5	AL18		
5	IO_L69N_5/VREF_5	AH18		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 788 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
5	IO_L69P_5	AJ18		
5	IO_L68N_5	AF18		
5	IO_L68P_5	AG18		
5	IO_L67N_5	AM19		
5	IO_L67P_5	AN19		
5	IO_L66N_5/VREF_5	AH19	NC	
5	IO_L66P_5	AJ19	NC	
5	IO_L57N_5/VREF_5	AN20		
5	IO_L57P_5	AP20		
5	IO_L56N_5	AD19		
5	IO_L56P_5	AE19		
5	IO_L55N_5	AL19		
5	IO_L55P_5	AM20		
5	IO_L54N_5	AJ20		
5	IO_L54P_5	AK20		
5	IO_L53_5/No_Pair	AG19		
5	IO_L50_5/No_Pair	AH20		
5	IO_L49N_5	AN21		
5	IO_L49P_5	AP21		
5	IO_L48N_5	AL21		
5	IO_L48P_5	AM21		
5	IO_L47N_5	AD20		
5	IO_L47P_5	AE20		
5	IO_L46N_5	AJ21		
5	IO_L46P_5	AK21		
5	IO_L45N_5/VREF_5	AG21		
5	IO_L45P_5	AH21		
5	IO_L44N_5	AD21		
5	IO_L44P_5	AE21		
5	IO_L43N_5	AM22		
5	IO_L43P_5	AN22		
5	IO_L39N_5	AH22		
5	IO_L39P_5	AJ22		
5	IO_L38N_5	AF20		
5	IO_L38P_5	AF21		
5	IO_L37N_5	AN23		
5	IO_L37P_5	AP23		
5	IO_L27N_5/VREF_5	AL22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 789/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 789 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
5	IO_L27P_5	AL23		
5	IO_L26N_5	AD22		
5	IO_L26P_5	AE22		
5	IO_L25N_5	AJ23		
5	IO_L25P_5	AK23		
5	IO_L21N_5	AN24		
5	IO_L21P_5	AP24		
5	IO_L20N_5	AE23		
5	IO_L20P_5	AF23		
5	IO_L19N_5	AM23		
5	IO_L19P_5	AM24		
5	IO_L09N_5/VREF_5	AJ24		
5	IO_L09P_5	AK24		
5	IO_L08N_5	AG22		
5	IO_L08P_5	AG23		
5	IO_L07N_5/VREF_5	AH23		
5	IO_L07P_5	AH24		
5	IO_L06N_5/VRP_5	AN25		
5	IO_L06P_5/VRN_5	AP25		
5	IO_L05_5/No_Pair	AH25		
5	IO_L03N_5/D4	AL25		
5	IO_L03P_5/D5	AM25		
5	IO_L02N_5/D6	AE24		
5	IO_L02P_5/D7	AF24		
5	IO_L01N_5/RDWR_B	AJ25		
5	IO_L01P_5/CS_B	AK25		
6	IO_L01P_6/VRN_6	AP32		
6	IO_L01N_6/VRP_6	AN32		
6	IO_L02P_6	AP28		
6	IO_L02N_6	AN28		
6	IO_L03P_6	AP31		
6	IO_L03N_6/VREF_6	AN31		
6	IO_L04P_6	AP29		
6	IO_L04N_6	AN29		
6	IO_L05P_6	AN26		
6	IO_L05N_6	AN27		
6	IO_L06P_6	AM33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 790 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
6	IO_L06N_6	AM34		
6	IO_L07P_6	AN30		
6	IO_L07N_6	AM30		
6	IO_L08P_6	AM26		
6	IO_L08N_6	AL26		
6	IO_L09P_6	AM28		
6	IO_L09N_6/VREF_6	AM29		
6	IO_L10P_6	AL33		
6	IO_L10N_6	AL34		
6	IO_L11P_6	AL27		
6	IO_L11N_6	AK27		
6	IO_L12P_6	AL29		
6	IO_L12N_6	AL30		
6	IO_L13P_6	AL32		
6	IO_L13N_6	AK32		
6	IO_L14P_6	AJ27		
6	IO_L14N_6	AJ28		
6	IO_L15P_6	AL31		
6	IO_L15N_6/VREF_6	AK31		
6	IO_L16P_6	AL28		
6	IO_L16N_6	AK28		
6	IO_L17P_6	AJ26		
6	IO_L17N_6	AH26		
6	IO_L18P_6	AJ33		
6	IO_L18N_6	AJ34		
6	IO_L19P_6	AJ31		
6	IO_L19N_6	AJ32		
6	IO_L20P_6	AG27		
6	IO_L20N_6	AG28		
6	IO_L21P_6	AK29		
6	IO_L21N_6/VREF_6	AJ29		
6	IO_L22P_6	AH33		
6	IO_L22N_6	AH34		
6	IO_L23P_6	AF27		
6	IO_L23N_6	AE27		
6	IO_L24P_6	AJ30		
6	IO_L24N_6	AH30		
6	IO_L25P_6	AH28		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 791/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 791 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
6	IO_L25N_6	AH29		
6	IO_L26P_6	AE28		
6	IO_L26N_6	AD28		
6	IO_L27P_6	AG32		
6	IO_L27N_6/VREF_6	AG33		
6	IO_L28P_6	AH32		
6	IO_L28N_6	AG31		
6	IO_L29P_6	AE26		
6	IO_L29N_6	AD26		
6	IO_L30P_6	AG29		
6	IO_L30N_6	AG30		
6	IO_L31P_6	AF32		
6	IO_L31N_6	AF33		
6	IO_L32P_6	AC26		
6	IO_L32N_6	AC27		
6	IO_L33P_6	AF28		
6	IO_L33N_6/VREF_6	AF29		
6	IO_L34P_6	AE33		
6	IO_L34N_6	AE34		
6	IO_L35P_6	AD25		
6	IO_L35N_6	AC25		
6	IO_L36P_6	AF31		
6	IO_L36N_6	AE31		
6	IO_L37P_6	AE29		
6	IO_L37N_6	AE30		
6	IO_L38P_6	AC28		
6	IO_L38N_6	AB27		
6	IO_L39P_6	AD33		
6	IO_L39N_6/VREF_6	AD34		
6	IO_L40P_6	AE32		
6	IO_L40N_6	AD32		
6	IO_L41P_6	AB24		
6	IO_L41N_6	AB25		
6	IO_L42P_6	AD29		
6	IO_L42N_6	AD30		
6	IO_L43P_6	AC33		
6	IO_L43N_6	AC34		
6	IO_L44P_6	AA27		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 792 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
6	IO_L44N_6	AA28		
6	IO_L45P_6	AC31		
6	IO_L45N_6/VREF_6	AC32		
6	IO_L46P_6	AC29		
6	IO_L46N_6	AC30		
6	IO_L47P_6	AA24		
6	IO_L47N_6	AA25		
6	IO_L48P_6	AB32		
6	IO_L48N_6	AB33		
6	IO_L49P_6	AB28		
6	IO_L49N_6	AB29		
6	IO_L50P_6	AA26		
6	IO_L50N_6	Y26		
6	IO_L51P_6	AA33		
6	IO_L51N_6/VREF_6	AA34		
6	IO_L52P_6	AB31		
6	IO_L52N_6	AA31		
6	IO_L53P_6	Y24		
6	IO_L53N_6	Y25		
6	IO_L54P_6	AA29		
6	IO_L54N_6	AA30		
6	IO_L55P_6	Y33		
6	IO_L55N_6	Y34		
6	IO_L56P_6	Y28		
6	IO_L56N_6	W27		
6	IO_L57P_6	AA32		
6	IO_L57N_6/VREF_6	Y32		
6	IO_L58P_6	Y29		
6	IO_L58N_6	Y30		
6	IO_L59P_6	W24		
6	IO_L59N_6	W25		
6	IO_L60P_6	W31		
6	IO_L60N_6	W32		
6	IO_L85P_6	W28		
6	IO_L85N_6	W29		
6	IO_L86P_6	V26		
6	IO_L86N_6	V27		
6	IO_L87P_6	W33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 793 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
6	IO_L87N_6/VREF_6	V33		
6	IO_L88P_6	V30		
6	IO_L88N_6	V31		
6	IO_L89P_6	V24		
6	IO_L89N_6	V25		
6	IO_L90P_6	V28		
6	IO_L90N_6	V29		
7	IO_L90P_7	U32		
7	IO_L90N_7	V32		
7	IO_L89P_7	U28		
7	IO_L89N_7	U29		
7	IO_L88P_7	U30		
7	IO_L88N_7/VREF_7	U31		
7	IO_L87P_7	T33		
7	IO_L87N_7	U33		
7	IO_L86P_7	U26		
7	IO_L86N_7	U27		
7	IO_L85P_7	T31		
7	IO_L85N_7	T32		
7	IO_L60P_7	R33		
7	IO_L60N_7	R34		
7	IO_L59P_7	U24		
7	IO_L59N_7	U25		
7	IO_L58P_7	R29		
7	IO_L58N_7/VREF_7	R30		
7	IO_L57P_7	P33		
7	IO_L57N_7	P34		
7	IO_L56P_7	T28		
7	IO_L56N_7	T29		
7	IO_L55P_7	P32		
7	IO_L55N_7	R32		
7	IO_L54P_7	P29		
7	IO_L54N_7	P30		
7	IO_L53P_7	T24		
7	IO_L53N_7	T25		
7	IO_L52P_7	N32		
7	IO_L52N_7/VREF_7	N33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 794 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
7	IO_L51P_7	N31		
7	IO_L51N_7	P31		
7	IO_L50P_7	T27		
7	IO_L50N_7	R28		
7	IO_L49P_7	M33		
7	IO_L49N_7	M34		
7	IO_L48P_7	M31		
7	IO_L48N_7	M32		
7	IO_L47P_7	R24		
7	IO_L47N_7	R25		
7	IO_L46P_7	M29		
7	IO_L46N_7/VREF_7	M30		
7	IO_L45P_7	L33		
7	IO_L45N_7	L34		
7	IO_L44P_7	P27		
7	IO_L44N_7	P28		
7	IO_L43P_7	L29		
7	IO_L43N_7	L30		
7	IO_L42P_7	K33		
7	IO_L42N_7	K34		
7	IO_L41P_7	P26		
7	IO_L41N_7	R26		
7	IO_L40P_7	K32		
7	IO_L40N_7/VREF_7	L32		
7	IO_L39P_7	K29		
7	IO_L39N_7	K30		
7	IO_L38P_7	P24		
7	IO_L38N_7	P25		
7	IO_L37P_7	J32		
7	IO_L37N_7	J33		
7	IO_L36P_7	J31		
7	IO_L36N_7	K31		
7	IO_L35P_7	N28		
7	IO_L35N_7	N29		
7	IO_L34P_7	H32		
7	IO_L34N_7/VREF_7	H33		
7	IO_L33P_7	H29		
7	IO_L33N_7	H30		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 795/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 795 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
7	IO_L32P_7	N24		
7	IO_L32N_7	N25		
7	IO_L31P_7	G33		
7	IO_L31N_7	G34		
7	IO_L30P_7	H31		
7	IO_L30N_7	G32		
7	IO_L29P_7	N27		
7	IO_L29N_7	M28		
7	IO_L28P_7	G28		
7	IO_L28N_7/VREF_7	G29		
7	IO_L27P_7	F33		
7	IO_L27N_7	F34		
7	IO_L26P_7	M26		
7	IO_L26N_7	M27		
7	IO_L25P_7	F31		
7	IO_L25N_7	F32		
7	IO_L24P_7	F30		
7	IO_L24N_7	G30		
7	IO_L23P_7	L25		
7	IO_L23N_7	M25		
7	IO_L22P_7	F27		
7	IO_L22N_7/VREF_7	F28		
7	IO_L21P_7	E29		
7	IO_L21N_7	F29		
7	IO_L20P_7	L28		
7	IO_L20N_7	K28		
7	IO_L19P_7	D33		
7	IO_L19N_7	D34		
7	IO_L18P_7	D32		
7	IO_L18N_7	E32		
7	IO_L17P_7	K26		
7	IO_L17N_7	L26		
7	IO_L16P_7	D31		
7	IO_L16N_7/VREF_7	E31		
7	IO_L15P_7	D29		
7	IO_L15N_7	D30		
7	IO_L14P_7	J28		
7	IO_L14N_7	J29		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 796 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
7	IO_L13P_7	D28		
7	IO_L13N_7	E28		
7	IO_L12P_7	C33		
7	IO_L12N_7	C34		
7	IO_L11P_7	J27		
7	IO_L11N_7	K27		
7	IO_L10P_7	B30		
7	IO_L10N_7/VREF_7	C30		
7	IO_L09P_7	C28		
7	IO_L09N_7	C29		
7	IO_L08P_7	H27		
7	IO_L08N_7	H28		
7	IO_L07P_7	A32		
7	IO_L07N_7	B32		
7	IO_L06P_7	A31		
7	IO_L06N_7	B31		
7	IO_L05P_7	D27		
7	IO_L05N_7	E27		
7	IO_L04P_7	A29		
7	IO_L04N_7/VREF_7	B29		
7	IO_L03P_7	A28		
7	IO_L03N_7	B28		
7	IO_L02P_7	D26		
7	IO_L02N_7	C26		
7	IO_L01P_7/VRN_7	B26		
7	IO_L01N_7/VRP_7	B27		
7	VCCO_7	E33		
7	VCCO_7	R31		
7	VCCO_7	L31		
7	VCCO_7	G31		
7	VCCO_7	C31		
7	VCCO_7	R27		
7	VCCO_7	L27		
7	VCCO_7	G27		
7	VCCO_7	C27		
7	VCCO_7	J26		
7	VCCO_7	M24		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 797/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 797 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
7	VCCO_7	U23		
7	VCCO_7	T23		
7	VCCO_7	R23		
7	VCCO_7	P23		
7	VCCO_7	N23		
6	VCCO_6	AK33		
6	VCCO_6	AM31		
6	VCCO_6	AH31		
6	VCCO_6	AD31		
6	VCCO_6	Y31		
6	VCCO_6	AM27		
6	VCCO_6	AH27		
6	VCCO_6	AD27		
6	VCCO_6	Y27		
6	VCCO_6	AF26		
6	VCCO_6	AC24		
6	VCCO_6	AB23		
6	VCCO_6	AA23		
6	VCCO_6	Y23		
6	VCCO_6	W23		
6	VCCO_6	V23		
5	VCCO_5	AL24		
5	VCCO_5	AG24		
5	VCCO_5	AD23		
5	VCCO_5	AC22		
5	VCCO_5	AC21		
5	VCCO_5	AL20		
5	VCCO_5	AG20		
5	VCCO_5	AC20		
5	VCCO_5	AC19		
5	VCCO_5	AC18		
4	VCCO_4	AC17		
4	VCCO_4	AC16		
4	VCCO_4	AL15		
4	VCCO_4	AG15		
4	VCCO_4	AC15		
4	VCCO_4	AC14		
4	VCCO_4	AC13		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 798 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
4	VCCO_4	AD12		
4	VCCO_4	AL11		
4	VCCO_4	AG11		
3	VCCO_3	AB12		
3	VCCO_3	AA12		
3	VCCO_3	Y12		
3	VCCO_3	W12		
3	VCCO_3	V12		
3	VCCO_3	AC11		
3	VCCO_3	AF9		
3	VCCO_3	AM8		
3	VCCO_3	AH8		
3	VCCO_3	AD8		
3	VCCO_3	Y8		
3	VCCO_3	AM4		
3	VCCO_3	AH4		
3	VCCO_3	AD4		
3	VCCO_3	Y4		
3	VCCO_3	AK2		
2	VCCO_2	U12		
2	VCCO_2	T12		
2	VCCO_2	R12		
2	VCCO_2	P12		
2	VCCO_2	N12		
2	VCCO_2	M11		
2	VCCO_2	J9		
2	VCCO_2	R8		
2	VCCO_2	L8		
2	VCCO_2	G8		
2	VCCO_2	C8		
2	VCCO_2	R4		
2	VCCO_2	L4		
2	VCCO_2	G4		
2	VCCO_2	C4		
2	VCCO_2	E2		
1	VCCO_1	M17		
1	VCCO_1	M16		
1	VCCO_1	M15		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 799/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 799 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
1	VCCO_1	H15		
1	VCCO_1	D15		
1	VCCO_1	M14		
1	VCCO_1	M13		
1	VCCO_1	L12		
1	VCCO_1	H11		
1	VCCO_1	D11		
0	VCCO_0	H24		
0	VCCO_0	D24		
0	VCCO_0	L23		
0	VCCO_0	M22		
0	VCCO_0	M21		
0	VCCO_0	M20		
0	VCCO_0	H20		
0	VCCO_0	D20		
0	VCCO_0	M19		
0	VCCO_0	M18		
N/A	CCLK	AG9		
N/A	PROG_B	G26		
N/A	DONE	AF10		
N/A	M0	AG25		
N/A	M1	AG26		
N/A	M2	AF25		
N/A	TCK	G9		
N/A	TDI	F26		
N/A	TDO	F9		
N/A	TMS	H10		
N/A	PWRDWN_B	AG10		
N/A	HSWAP_EN	H25		
N/A	RSVD	H9		
N/A	VBATT	J10		
N/A	DXP	J25		
N/A	DXN	H26		
N/A	VCCINT	AD24		
N/A	VCCINT	L24		
N/A	VCCINT	AC23		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 800 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	VCCINT	M23		
N/A	VCCINT	AB22		
N/A	VCCINT	AA22		
N/A	VCCINT	Y22		
N/A	VCCINT	W22		
N/A	VCCINT	V22		
N/A	VCCINT	U22		
N/A	VCCINT	T22		
N/A	VCCINT	R22		
N/A	VCCINT	P22		
N/A	VCCINT	N22		
N/A	VCCINT	AB21		
N/A	VCCINT	N21		
N/A	VCCINT	AB20		
N/A	VCCINT	N20		
N/A	VCCINT	AB19		
N/A	VCCINT	N19		
N/A	VCCINT	AB18		
N/A	VCCINT	N18		
N/A	VCCINT	AB17		
N/A	VCCINT	N17		
N/A	VCCINT	AB16		
N/A	VCCINT	N16		
N/A	VCCINT	AB15		
N/A	VCCINT	N15		
N/A	VCCINT	AB14		
N/A	VCCINT	N14		
N/A	VCCINT	AB13		
N/A	VCCINT	AA13		
N/A	VCCINT	Y13		
N/A	VCCINT	W13		
N/A	VCCINT	V13		
N/A	VCCINT	U13		
N/A	VCCINT	T13		
N/A	VCCINT	R13		
N/A	VCCINT	P13		
N/A	VCCINT	N13		
N/A	VCCINT	AC12		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 801 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	VCCINT	M12		
N/A	VCCINT	AD11		
N/A	VCCINT	L11		
N/A	VCCAUX	AN34		
N/A	VCCAUX	AG34		
N/A	VCCAUX	U34		
N/A	VCCAUX	H34		
N/A	VCCAUX	B34		
N/A	VCCAUX	AP33		
N/A	VCCAUX	A33		
N/A	VCCAUX	AP27		
N/A	VCCAUX	A27		
N/A	VCCAUX	AP17		
N/A	VCCAUX	A17		
N/A	VCCAUX	AP8		
N/A	VCCAUX	A8		
N/A	VCCAUX	AP2		
N/A	VCCAUX	A2		
N/A	VCCAUX	AN1		
N/A	VCCAUX	AG1		
N/A	VCCAUX	U1		
N/A	VCCAUX	H1		
N/A	VCCAUX	B1		
N/A	GND	AK34		
N/A	GND	AF34		
N/A	GND	AB34		
N/A	GND	W34		
N/A	GND	V34		
N/A	GND	T34		
N/A	GND	N34		
N/A	GND	J34		
N/A	GND	E34		
N/A	GND	AN33		
N/A	GND	B33		
N/A	GND	AM32		
N/A	GND	C32		
N/A	GND	AP30		
N/A	GND	AK30		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 802 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	GND	AF30		
N/A	GND	AB30		
N/A	GND	W30		
N/A	GND	T30		
N/A	GND	N30		
N/A	GND	J30		
N/A	GND	E30		
N/A	GND	A30		
N/A	GND	AP26		
N/A	GND	AK26		
N/A	GND	AB26		
N/A	GND	W26		
N/A	GND	T26		
N/A	GND	N26		
N/A	GND	E26		
N/A	GND	A26		
N/A	GND	AE25		
N/A	GND	K25		
N/A	GND	AP22		
N/A	GND	AK22		
N/A	GND	AF22		
N/A	GND	J22		
N/A	GND	E22		
N/A	GND	A22		
N/A	GND	Y21		
N/A	GND	W21		
N/A	GND	V21		
N/A	GND	U21		
N/A	GND	T21		
N/A	GND	R21		
N/A	GND	AA20		
N/A	GND	Y20		
N/A	GND	W20		
N/A	GND	V20		
N/A	GND	U20		
N/A	GND	T20		
N/A	GND	R20		
N/A	GND	P20		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 803/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 803 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	GND	AP19		
N/A	GND	AK19		
N/A	GND	AF19		
N/A	GND	AA19		
N/A	GND	Y19		
N/A	GND	W19		
N/A	GND	V19		
N/A	GND	U19		
N/A	GND	T19		
N/A	GND	R19		
N/A	GND	P19		
N/A	GND	J19		
N/A	GND	E19		
N/A	GND	A19		
N/A	GND	AP18		
N/A	GND	AA18		
N/A	GND	Y18		
N/A	GND	W18		
N/A	GND	V18		
N/A	GND	U18		
N/A	GND	T18		
N/A	GND	R18		
N/A	GND	P18		
N/A	GND	A18		
N/A	GND	AA17		
N/A	GND	Y17		
N/A	GND	W17		
N/A	GND	V17		
N/A	GND	U17		
N/A	GND	T17		
N/A	GND	R17		
N/A	GND	P17		
N/A	GND	AP16		
N/A	GND	AK16		
N/A	GND	AF16		
N/A	GND	AA16		
N/A	GND	Y16		
N/A	GND	W16		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 804 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	GND	V16		
N/A	GND	U16		
N/A	GND	T16		
N/A	GND	R16		
N/A	GND	P16		
N/A	GND	J16		
N/A	GND	E16		
N/A	GND	A16		
N/A	GND	AA15		
N/A	GND	Y15		
N/A	GND	W15		
N/A	GND	V15		
N/A	GND	U15		
N/A	GND	T15		
N/A	GND	R15		
N/A	GND	P15		
N/A	GND	Y14		
N/A	GND	W14		
N/A	GND	V14		
N/A	GND	U14		
N/A	GND	T14		
N/A	GND	R14		
N/A	GND	AP13		
N/A	GND	AK13		
N/A	GND	AF13		
N/A	GND	J13		
N/A	GND	E13		
N/A	GND	A13		
N/A	GND	AE10		
N/A	GND	K10		
N/A	GND	AP9		
N/A	GND	AK9		
N/A	GND	AB9		
N/A	GND	W9		
N/A	GND	T9		
N/A	GND	N9		
N/A	GND	E9		
N/A	GND	A9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 805/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 805 of 947

Table 11: **FF1148 — XC2VP40 and XC2VP50**


Bank	Pin Description	Pin Number	No Connects	
			XC2VP40	XC2VP50
N/A	GND	AP5		
N/A	GND	AK5		
N/A	GND	AF5		
N/A	GND	AB5		
N/A	GND	W5		
N/A	GND	T5		
N/A	GND	N5		
N/A	GND	J5		
N/A	GND	E5		
N/A	GND	A5		
N/A	GND	AM3		
N/A	GND	C3		
N/A	GND	AN2		
N/A	GND	B2		
N/A	GND	AK1		
N/A	GND	AF1		
N/A	GND	AB1		
N/A	GND	W1		
N/A	GND	V1		
N/A	GND	T1		
N/A	GND	N1		
N/A	GND	J1		
N/A	GND	E1		

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 806 of 947

FF1148 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

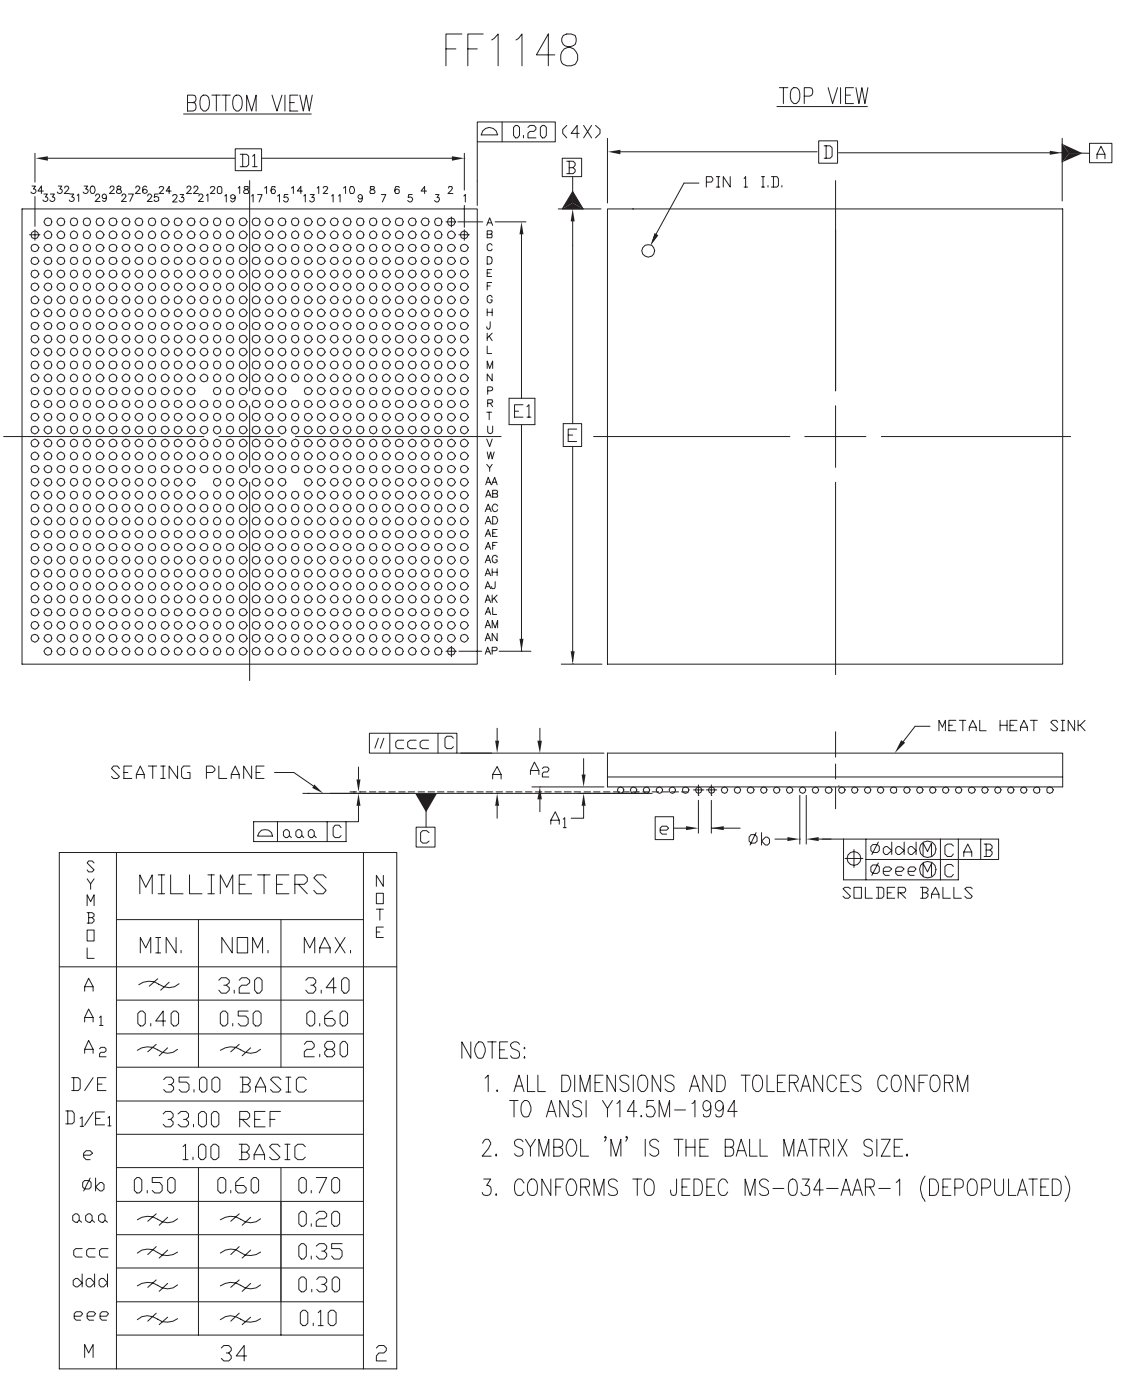

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.40	
A_1	0.40	0.50	0.60	
A_2			2.80	
D/E	35.00 BASIC			
D_1/E_1	33.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
ccc			0.35	
ddd			0.30	
eee			0.10	
M	34			2

NOTES:
1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M–1994
2. SYMBOL 'M' IS THE BALL MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAR–1 (DEPOPULATED)

Figure 7: **FF1148 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 807/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 807 of 947

FF1517 Flip-Chip Fine-Pitch BGA Package

As shown in Table 12, XC2VP50 and XC2VP70 Virtex-II Pro devices are available in the FF1517 flip-chip fine-pitch BGA package. Following this table are the FF1517 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
0	IO_L01N_0/VRP_0	D31		
0	IO_L01P_0/VRN_0	E31		
0	IO_L02N_0	K30		
0	IO_L02P_0	J30		
0	IO_L03N_0	G30		
0	IO_L03P_0/VREF_0	H30		
0	IO_L05_0/No_Pair	K28		
0	IO_L06N_0	E30		
0	IO_L06P_0	F30		
0	IO_L07N_0	C30		
0	IO_L07P_0	D30		
0	IO_L08N_0	J29		
0	IO_L08P_0	K29		
0	IO_L09N_0	G29		
0	IO_L09P_0/VREF_0	H29		
0	IO_L19N_0	E29		
0	IO_L19P_0	F29		
0	IO_L20N_0	L28		
0	IO_L20P_0	L27		
0	IO_L21N_0	C29		
0	IO_L21P_0	D29		
0	IO_L25N_0	H28		
0	IO_L25P_0	J28		
0	IO_L26N_0	M27		
0	IO_L26P_0	M26		
0	IO_L27N_0	D28		
0	IO_L27P_0/VREF_0	E28		
0	IO_L28N_0	H27	NC	
0	IO_L28P_0	J27	NC	
0	IO_L29N_0	J26	NC	
0	IO_L29P_0	K26	NC	
0	IO_L30N_0	F28	NC	
0	IO_L30P_0	G27	NC	
0	IO_L34N_0	D27	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 808 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
0	IO_L34P_0	E27	NC	
0	IO_L35N_0	L26	NC	
0	IO_L35P_0	L25	NC	
0	IO_L36N_0	G26	NC	
0	IO_L36P_0/VREF_0	H26	NC	
0	IO_L37N_0	E26		
0	IO_L37P_0	F26		
0	IO_L38N_0	K25		
0	IO_L38P_0	K24		
0	IO_L39N_0	C26		
0	IO_L39P_0	D26		
0	IO_L43N_0	H25		
0	IO_L43P_0	J25		
0	IO_L44N_0	M25		
0	IO_L44P_0	M24		
0	IO_L45N_0	F25		
0	IO_L45P_0/VREF_0	G25		
0	IO_L46N_0	C25		
0	IO_L46P_0	D25		
0	IO_L47N_0	L23		
0	IO_L47P_0	M22		
0	IO_L48N_0	H24		
0	IO_L48P_0	J24		
0	IO_L49N_0	E25		
0	IO_L49P_0	E24		
0	IO_L50_0/No_Pair	N23		
0	IO_L53_0/No_Pair	M23		
0	IO_L54N_0	H23		
0	IO_L54P_0	J23		
0	IO_L55N_0	F24		
0	IO_L55P_0	G23		
0	IO_L56N_0	K22		
0	IO_L56P_0	L22		
0	IO_L57N_0	C23		
0	IO_L57P_0/VREF_0	D23		
0	IO_L58N_0	H22		
0	IO_L58P_0	J22		
0	IO_L59N_0	N22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 809 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
0	IO_L59P_0	N21		
0	IO_L60N_0	E23		
0	IO_L60P_0	F22		
0	IO_L64N_0	D22		
0	IO_L64P_0	E22		
0	IO_L65N_0	H21		
0	IO_L65P_0	H20		
0	IO_L66N_0	G22		
0	IO_L66P_0/VREF_0	G21		
0	IO_L67N_0	D21		
0	IO_L67P_0	E21		
0	IO_L68N_0	J21		
0	IO_L68P_0	K21		
0	IO_L69N_0	C22		
0	IO_L69P_0/VREF_0	C21		
0	IO_L73N_0	F21		
0	IO_L73P_0	F20		
0	IO_L74N_0/GCLK7P	L21		
0	IO_L74P_0/GCLK6S	M21		
0	IO_L75N_0/GCLK5P	D20		
0	IO_L75P_0/GCLK4S	E20		
1	IO_L75N_1/GCLK3P	K20		
1	IO_L75P_1/GCLK2S	J20		
1	IO_L74N_1/GCLK1P	N20		
1	IO_L74P_1/GCLK0S	M20		
1	IO_L73N_1	E19		
1	IO_L73P_1	D19		
1	IO_L69N_1/VREF_1	G19		
1	IO_L69P_1	F19		
1	IO_L68N_1	L19		
1	IO_L68P_1	K19		
1	IO_L67N_1	J19		
1	IO_L67P_1	H19		
1	IO_L66N_1/VREF_1	C19		
1	IO_L66P_1	C18		
1	IO_L65N_1	N19		
1	IO_L65P_1	M19		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 810 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
1	IO_L64N_1	E18		
1	IO_L64P_1	D18		
1	IO_L60N_1	G18		
1	IO_L60P_1	F18		
1	IO_L59N_1	L18		
1	IO_L59P_1	K18		
1	IO_L58N_1	J18		
1	IO_L58P_1	H18		
1	IO_L57N_1/VREF_1	D17		
1	IO_L57P_1	C17		
1	IO_L56N_1	N18		
1	IO_L56P_1	M18		
1	IO_L55N_1	E17		
1	IO_L55P_1	E16		
1	IO_L54N_1	G17		
1	IO_L54P_1	F16		
1	IO_L53_1/No_Pair	J17		
1	IO_L50_1/No_Pair	H17		
1	IO_L49N_1	J16		
1	IO_L49P_1	H16		
1	IO_L48N_1	D15		
1	IO_L48P_1	C15		
1	IO_L47N_1	L17		
1	IO_L47P_1	K16		
1	IO_L46N_1	F15		
1	IO_L46P_1	E15		
1	IO_L45N_1/VREF_1	H15		
1	IO_L45P_1	G15		
1	IO_L44N_1	N17		
1	IO_L44P_1	M17		
1	IO_L43N_1	D14		
1	IO_L43P_1	C14		
1	IO_L39N_1	F14		
1	IO_L39P_1	E14		
1	IO_L38N_1	M16		
1	IO_L38P_1	M15		
1	IO_L37N_1	H14		
1	IO_L37P_1	G14		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 811/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 811 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
1	IO_L36N_1/VREF_1	E13	NC	
1	IO_L36P_1	D13	NC	
1	IO_L35N_1	K15	NC	
1	IO_L35P_1	J15	NC	
1	IO_L34N_1	G13	NC	
1	IO_L34P_1	F12	NC	
1	IO_L30N_1	J13	NC	
1	IO_L30P_1	H13	NC	
1	IO_L29N_1	L15	NC	
1	IO_L29P_1	L14	NC	
1	IO_L28N_1	E12	NC	
1	IO_L28P_1	D12	NC	
1	IO_L27N_1/VREF_1	J12		
1	IO_L27P_1	H12		
1	IO_L26N_1	K14		
1	IO_L26P_1	J14		
1	IO_L25N_1	D11		
1	IO_L25P_1	C11		
1	IO_L21N_1	F11		
1	IO_L21P_1	E11		
1	IO_L20N_1	M14		
1	IO_L20P_1	M13		
1	IO_L19N_1	H11		
1	IO_L19P_1	G11		
1	IO_L09N_1/VREF_1	J11		
1	IO_L09P_1	J10		
1	IO_L08N_1	L13		
1	IO_L08P_1	L12		
1	IO_L07N_1	D10		
1	IO_L07P_1	C10		
1	IO_L06N_1	F10		
1	IO_L06P_1	E10		
1	IO_L05_1/No_Pair	K10		
1	IO_L03N_1/VREF_1	H10		
1	IO_L03P_1	G10		
1	IO_L02N_1	K12		
1	IO_L02P_1	K11		
1	IO_L01N_1/VRP_1	E9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 812 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
1	IO_L01P_1/VRN_1	D9		
2	IO_L01N_2/VRP_2	C7		
2	IO_L01P_2/VRN_2	D7		
2	IO_L02N_2	G9		
2	IO_L02P_2	H9		
2	IO_L03N_2	C5		
2	IO_L03P_2	D5		
2	IO_L04N_2/VREF_2	D6		
2	IO_L04P_2	E6		
2	IO_L05N_2	H8		
2	IO_L05P_2	J9		
2	IO_L06N_2	E7		
2	IO_L06P_2	F7		
2	IO_L73N_2	D1	NC	
2	IO_L73P_2	D2	NC	
2	IO_L75N_2	E2	NC	
2	IO_L75P_2	E3	NC	
2	IO_L76N_2/VREF_2	F5	NC	
2	IO_L76P_2	G5	NC	
2	IO_L78N_2	F3	NC	
2	IO_L78P_2	F4	NC	
2	IO_L79N_2	F1	NC	
2	IO_L79P_2	F2	NC	
2	IO_L81N_2	G6	NC	
2	IO_L81P_2	G7	NC	
2	IO_L82N_2/VREF_2	G3	NC	
2	IO_L82P_2	G4	NC	
2	IO_L84N_2	G1	NC	
2	IO_L84P_2	G2	NC	
2	IO_L07N_2	H6		
2	IO_L07P_2	H7		
2	IO_L08N_2	K8		
2	IO_L08P_2	K9		
2	IO_L09N_2	H2		
2	IO_L09P_2	H3		
2	IO_L10N_2/VREF_2	J6		
2	IO_L10P_2	J7		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 813/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 813 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
2	IO_L11N_2	L9		
2	IO_L11P_2	M10		
2	IO_L12N_2	H4		
2	IO_L12P_2	J5		
2	IO_L13N_2	J1		
2	IO_L13P_2	J2		
2	IO_L14N_2	M8		
2	IO_L14P_2	N9		
2	IO_L15N_2	K6		
2	IO_L15P_2	K7		
2	IO_L16N_2/VREF_2	K4		
2	IO_L16P_2	K5		
2	IO_L17N_2	P10		
2	IO_L17P_2	N10		
2	IO_L18N_2	K3		
2	IO_L18P_2	J3		
2	IO_L19N_2	K1		
2	IO_L19P_2	K2		
2	IO_L20N_2	M11		
2	IO_L20P_2	N11		
2	IO_L21N_2	L7		
2	IO_L21P_2	L8		
2	IO_L22N_2/VREF_2	L5		
2	IO_L22P_2	L6		
2	IO_L23N_2	P8		
2	IO_L23P_2	P9		
2	IO_L24N_2	L3		
2	IO_L24P_2	L4		
2	IO_L25N_2	L1		
2	IO_L25P_2	L2		
2	IO_L26N_2	P11		
2	IO_L26P_2	P12		
2	IO_L27N_2	M6		
2	IO_L27P_2	M7		
2	IO_L28N_2/VREF_2	M2		
2	IO_L28P_2	M3		
2	IO_L29N_2	R9		
2	IO_L29P_2	R10		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 814 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
2	IO_L30N_2	N6		
2	IO_L30P_2	N7		
2	IO_L31N_2	M4		
2	IO_L31P_2	N5		
2	IO_L32N_2	R11		
2	IO_L32P_2	R12		
2	IO_L33N_2	N1		
2	IO_L33P_2	N2		
2	IO_L34N_2/VREF_2	P6		
2	IO_L34P_2	P7		
2	IO_L35N_2	R13		
2	IO_L35P_2	T13		
2	IO_L36N_2	P4		
2	IO_L36P_2	P5		
2	IO_L37N_2	P3		
2	IO_L37P_2	N3		
2	IO_L38N_2	T10		
2	IO_L38P_2	T11		
2	IO_L39N_2	P1		
2	IO_L39P_2	P2		
2	IO_L40N_2/VREF_2	R7		
2	IO_L40P_2	R8		
2	IO_L41N_2	T12		
2	IO_L41P_2	U12		
2	IO_L42N_2	R5		
2	IO_L42P_2	R6		
2	IO_L43N_2	R3		
2	IO_L43P_2	R4		
2	IO_L44N_2	U8		
2	IO_L44P_2	T8		
2	IO_L45N_2	R1		
2	IO_L45P_2	R2		
2	IO_L46N_2/VREF_2	T6		
2	IO_L46P_2	T7		
2	IO_L47N_2	U9		
2	IO_L47P_2	U10		
2	IO_L48N_2	T2		
2	IO_L48P_2	T3		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 815/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 815 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
2	IO_L49N_2	U5		
2	IO_L49P_2	U6		
2	IO_L50N_2	U13		
2	IO_L50P_2	V13		
2	IO_L51N_2	U4		
2	IO_L51P_2	T4		
2	IO_L52N_2/VREF_2	U1		
2	IO_L52P_2	U2		
2	IO_L53N_2	V9		
2	IO_L53P_2	V10		
2	IO_L54N_2	V7		
2	IO_L54P_2	V8		
2	IO_L55N_2	V5		
2	IO_L55P_2	V6		
2	IO_L56N_2	V11		
2	IO_L56P_2	V12		
2	IO_L57N_2	V3		
2	IO_L57P_2	V4		
2	IO_L58N_2/VREF_2	V1		
2	IO_L58P_2	V2		
2	IO_L59N_2	W10		
2	IO_L59P_2	W11		
2	IO_L60N_2	W7		
2	IO_L60P_2	W8		
2	IO_L85N_2	W5		
2	IO_L85P_2	W6		
2	IO_L86N_2	W12		
2	IO_L86P_2	W13		
2	IO_L87N_2	W3		
2	IO_L87P_2	W4		
2	IO_L88N_2/VREF_2	Y7		
2	IO_L88P_2	Y8		
2	IO_L89N_2	W9		
2	IO_L89P_2	Y9		
2	IO_L90N_2	Y3		
2	IO_L90P_2	Y4		
3	IO_L90N_3	AA7		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 816 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
3	IO_L90P_3	AA8		
3	IO_L89N_3	Y11		
3	IO_L89P_3	Y12		
3	IO_L88N_3	AA5		
3	IO_L88P_3	AA6		
3	IO_L87N_3/VREF_3	AA3		
3	IO_L87P_3	AA4		
3	IO_L86N_3	Y13		
3	IO_L86P_3	AA13		
3	IO_L85N_3	AB7		
3	IO_L85P_3	AB8		
3	IO_L60N_3	AB5		
3	IO_L60P_3	AB6		
3	IO_L59N_3	AA9		
3	IO_L59P_3	AA10		
3	IO_L58N_3	AB3		
3	IO_L58P_3	AB4		
3	IO_L57N_3/VREF_3	AB1		
3	IO_L57P_3	AB2		
3	IO_L56N_3	AA11		
3	IO_L56P_3	AA12		
3	IO_L55N_3	AC5		
3	IO_L55P_3	AC6		
3	IO_L54N_3	AC1		
3	IO_L54P_3	AC2		
3	IO_L53N_3	AB9		
3	IO_L53P_3	AB10		
3	IO_L52N_3	AC8		
3	IO_L52P_3	AD8		
3	IO_L51N_3/VREF_3	AC4		
3	IO_L51P_3	AD4		
3	IO_L50N_3	AB11		
3	IO_L50P_3	AB12		
3	IO_L49N_3	AD6		
3	IO_L49P_3	AD7		
3	IO_L48N_3	AD2		
3	IO_L48P_3	AD3		
3	IO_L47N_3	AC9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 817/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 817 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
3	IO_L47P_3	AC10		
3	IO_L46N_3	AE7		
3	IO_L46P_3	AE8		
3	IO_L45N_3/VREF_3	AE5		
3	IO_L45P_3	AE6		
3	IO_L44N_3	AB13		
3	IO_L44P_3	AC13		
3	IO_L43N_3	AE3		
3	IO_L43P_3	AE4		
3	IO_L42N_3	AE1		
3	IO_L42P_3	AE2		
3	IO_L41N_3	AD10		
3	IO_L41P_3	AD11		
3	IO_L40N_3	AF6		
3	IO_L40P_3	AF7		
3	IO_L39N_3/VREF_3	AF4		
3	IO_L39P_3	AF5		
3	IO_L38N_3	AC12		
3	IO_L38P_3	AD12		
3	IO_L37N_3	AF1		
3	IO_L37P_3	AF2		
3	IO_L36N_3	AG6		
3	IO_L36P_3	AG7		
3	IO_L35N_3	AE9		
3	IO_L35P_3	AE10		
3	IO_L34N_3	AF3		
3	IO_L34P_3	AG3		
3	IO_L33N_3/VREF_3	AG1		
3	IO_L33P_3	AG2		
3	IO_L32N_3	AE11		
3	IO_L32P_3	AE12		
3	IO_L31N_3	AH6		
3	IO_L31P_3	AH7		
3	IO_L30N_3	AG5		
3	IO_L30P_3	AH4		
3	IO_L29N_3	AD13		
3	IO_L29P_3	AE13		
3	IO_L28N_3	AH2		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 818 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
3	IO_L28P_3	AH3		
3	IO_L27N_3/VREF_3	AJ7		
3	IO_L27P_3	AJ8		
3	IO_L26N_3	AF8		
3	IO_L26P_3	AF9		
3	IO_L25N_3	AJ5		
3	IO_L25P_3	AJ6		
3	IO_L24N_3	AJ3		
3	IO_L24P_3	AJ4		
3	IO_L23N_3	AF10		
3	IO_L23P_3	AG10		
3	IO_L22N_3	AJ1		
3	IO_L22P_3	AJ2		
3	IO_L21N_3/VREF_3	AK6		
3	IO_L21P_3	AK7		
3	IO_L20N_3	AF11		
3	IO_L20P_3	AF12		
3	IO_L19N_3	AK4		
3	IO_L19P_3	AK5		
3	IO_L18N_3	AK1		
3	IO_L18P_3	AK2		
3	IO_L17N_3	AG9		
3	IO_L17P_3	AH8		
3	IO_L16N_3	AL6		
3	IO_L16P_3	AL7		
3	IO_L15N_3/VREF_3	AK3		
3	IO_L15P_3	AL3		
3	IO_L14N_3	AG11		
3	IO_L14P_3	AH11		
3	IO_L13N_3	AL1		
3	IO_L13P_3	AL2		
3	IO_L12N_3	AM6		
3	IO_L12P_3	AM7		
3	IO_L11N_3	AH10		
3	IO_L11P_3	AJ9		
3	IO_L10N_3	AL5		
3	IO_L10P_3	AM4		
3	IO_L09N_3/VREF_3	AM2		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 819 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
3	IO_L09P_3	AM3		
3	IO_L08N_3	AK8		
3	IO_L08P_3	AK9		
3	IO_L07N_3	AN6		
3	IO_L07P_3	AN7		
3	IO_L84N_3	AN3	NC	
3	IO_L84P_3	AN4	NC	
3	IO_L82N_3	AN1	NC	
3	IO_L82P_3	AN2	NC	
3	IO_L81N_3/VREF_3	AN5	NC	
3	IO_L81P_3	AP5	NC	
3	IO_L79N_3	AP3	NC	
3	IO_L79P_3	AP4	NC	
3	IO_L78N_3	AP1	NC	
3	IO_L78P_3	AP2	NC	
3	IO_L76N_3	AR2	NC	
3	IO_L76P_3	AR3	NC	
3	IO_L75N_3/VREF_3	AT1	NC	
3	IO_L75P_3	AT2	NC	
3	IO_L73N_3	AT5	NC	
3	IO_L73P_3	AU5	NC	
3	IO_L06N_3	AR6		
3	IO_L06P_3	AT6		
3	IO_L05N_3	AL9		
3	IO_L05P_3	AM8		
3	IO_L04N_3	AP7		
3	IO_L04P_3	AR7		
3	IO_L03N_3/VREF_3	AM9		
3	IO_L03P_3	AN9		
3	IO_L02N_3	AR8		
3	IO_L02P_3	AT8		
3	IO_L01N_3/VRP_3	AT7		
3	IO_L01P_3/VRN_3	AU7		
4	IO_L01N_4/BUSY/DOUT(1)	AT9		
4	IO_L01P_4/INIT_B	AR9		
4	IO_L02N_4/D0/DIN(1)	AK11		
4	IO_L02P_4/D1	AK12		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Page 820/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 820 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
4	IO_L03N_4/D2	AN10		
4	IO_L03P_4/D3	AM10		
4	IO_L05_4/No_Pair	AK10		
4	IO_L06N_4/VRP_4	AR10		
4	IO_L06P_4/VRN_4	AP10		
4	IO_L07N_4	AU10		
4	IO_L07P_4/VREF_4	AT10		
4	IO_L08N_4	AJ12		
4	IO_L08P_4	AJ13		
4	IO_L09N_4	AL10		
4	IO_L09P_4/VREF_4	AL11		
4	IO_L19N_4	AN11		
4	IO_L19P_4	AM11		
4	IO_L20N_4	AH13		
4	IO_L20P_4	AH14		
4	IO_L21N_4	AR11		
4	IO_L21P_4	AP11		
4	IO_L25N_4	AU11		
4	IO_L25P_4	AT11		
4	IO_L26N_4	AL14		
4	IO_L26P_4	AK14		
4	IO_L27N_4	AM12		
4	IO_L27P_4/VREF_4	AL12		
4	IO_L28N_4	AT12	NC	
4	IO_L28P_4	AR12	NC	
4	IO_L29N_4	AJ14	NC	
4	IO_L29P_4	AJ15	NC	
4	IO_L30N_4	AM13	NC	
4	IO_L30P_4	AL13	NC	
4	IO_L34N_4	AP12	NC	
4	IO_L34P_4	AN13	NC	
4	IO_L35N_4	AL15	NC	
4	IO_L35P_4	AK15	NC	
4	IO_L36N_4	AT13	NC	
4	IO_L36P_4/VREF_4	AR13	NC	
4	IO_L37N_4	AN14		
4	IO_L37P_4	AM14		
4	IO_L38N_4	AH15		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 821/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 821 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
4	IO_L38P_4	AH16		
4	IO_L39N_4	AR14		
4	IO_L39P_4	AP14		
4	IO_L43N_4	AU14		
4	IO_L43P_4	AT14		
4	IO_L44N_4	AH17		
4	IO_L44P_4	AG17		
4	IO_L45N_4	AN15		
4	IO_L45P_4/VREF_4	AM15		
4	IO_L46N_4	AR15		
4	IO_L46P_4	AP15		
4	IO_L47N_4	AK16		
4	IO_L47P_4	AJ17		
4	IO_L48N_4	AU15		
4	IO_L48P_4	AT15		
4	IO_L49N_4	AM16		
4	IO_L49P_4	AL16		
4	IO_L50_4/No_Pair	AM17		
4	IO_L53_4/No_Pair	AL17		
4	IO_L54N_4	AP16		
4	IO_L54P_4	AN17		
4	IO_L55N_4	AR16		
4	IO_L55P_4	AR17		
4	IO_L56N_4	AH18		
4	IO_L56P_4	AG18		
4	IO_L57N_4	AU17		
4	IO_L57P_4/VREF_4	AT17		
4	IO_L58N_4	AM18		
4	IO_L58P_4	AL18		
4	IO_L59N_4	AK18		
4	IO_L59P_4	AJ18		
4	IO_L60N_4	AP18		
4	IO_L60P_4	AN18		
4	IO_L64N_4	AT18		
4	IO_L64P_4	AR18		
4	IO_L65N_4	AH19		
4	IO_L65P_4	AG19		
4	IO_L66N_4	AU18		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 822 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
4	IO_L66P_4/VREF_4	AU19		
4	IO_L67N_4	AM19		
4	IO_L67P_4	AL19		
4	IO_L68N_4	AK19		
4	IO_L68P_4	AJ19		
4	IO_L69N_4	AP19		
4	IO_L69P_4/VREF_4	AN19		
4	IO_L73N_4	AT19		
4	IO_L73P_4	AR19		
4	IO_L74N_4/GCLK3S	AH20		
4	IO_L74P_4/GCLK2P	AG20		
4	IO_L75N_4/GCLK1S	AL20		
4	IO_L75P_4/GCLK0P	AK20		
5	IO_L75N_5/GCLK7S	AR20		
5	IO_L75P_5/GCLK6P	AT20		
5	IO_L74N_5/GCLK5S	AH21		
5	IO_L74P_5/GCLK4P	AJ21		
5	IO_L73N_5	AP20		
5	IO_L73P_5	AP21		
5	IO_L69N_5/VREF_5	AU21		
5	IO_L69P_5	AU22		
5	IO_L68N_5	AK21		
5	IO_L68P_5	AL21		
5	IO_L67N_5	AR21		
5	IO_L67P_5	AT21		
5	IO_L66N_5/VREF_5	AN21		
5	IO_L66P_5	AN22		
5	IO_L65N_5	AM20		
5	IO_L65P_5	AM21		
5	IO_L64N_5	AR22		
5	IO_L64P_5	AT22		
5	IO_L60N_5	AP22		
5	IO_L60P_5	AR23		
5	IO_L59N_5	AG21		
5	IO_L59P_5	AG22		
5	IO_L58N_5	AL22		
5	IO_L58P_5	AM22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 823/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 823 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
5	IO_L57N_5/VREF_5	AT23		
5	IO_L57P_5	AU23		
5	IO_L56N_5	AJ22		
5	IO_L56P_5	AK22		
5	IO_L55N_5	AN23		
5	IO_L55P_5	AP24		
5	IO_L54N_5	AL23		
5	IO_L54P_5	AM23		
5	IO_L53_5/No_Pair	AH23		
5	IO_L50_5/No_Pair	AG23		
5	IO_L49N_5	AR24		
5	IO_L49P_5	AR25		
5	IO_L48N_5	AL24		
5	IO_L48P_5	AM24		
5	IO_L47N_5	AH22		
5	IO_L47P_5	AJ23		
5	IO_L46N_5	AT25		
5	IO_L46P_5	AU25		
5	IO_L45N_5/VREF_5	AN25		
5	IO_L45P_5	AP25		
5	IO_L44N_5	AH24		
5	IO_L44P_5	AH25		
5	IO_L43N_5	AL25		
5	IO_L43P_5	AM25		
5	IO_L39N_5	AT26		
5	IO_L39P_5	AU26		
5	IO_L38N_5	AK24		
5	IO_L38P_5	AK25		
5	IO_L37N_5	AP26		
5	IO_L37P_5	AR26		
5	IO_L36N_5/VREF_5	AM26	NC	
5	IO_L36P_5	AN26	NC	
5	IO_L35N_5	AJ25	NC	
5	IO_L35P_5	AJ26	NC	
5	IO_L34N_5	AR27	NC	
5	IO_L34P_5	AT27	NC	
5	IO_L30N_5	AN27	NC	
5	IO_L30P_5	AP28	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 824 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
5	IO_L29N_5	AK26	NC	
5	IO_L29P_5	AL26	NC	
5	IO_L28N_5	AL27	NC	
5	IO_L28P_5	AM27	NC	
5	IO_L27N_5/VREF_5	AR28		
5	IO_L27P_5	AT28		
5	IO_L26N_5	AH26		
5	IO_L26P_5	AH27		
5	IO_L25N_5	AL28		
5	IO_L25P_5	AM28		
5	IO_L21N_5	AT29		
5	IO_L21P_5	AU29		
5	IO_L20N_5	AJ27		
5	IO_L20P_5	AJ28		
5	IO_L19N_5	AP29		
5	IO_L19P_5	AR29		
5	IO_L09N_5/VREF_5	AM29		
5	IO_L09P_5	AN29		
5	IO_L08N_5	AK29		
5	IO_L08P_5	AL29		
5	IO_L07N_5/VREF_5	AT30		
5	IO_L07P_5	AU30		
5	IO_L06N_5/VRP_5	AP30		
5	IO_L06P_5/VRN_5	AR30		
5	IO_L05_5/No_Pair	AK28		
5	IO_L03N_5/D4	AM30		
5	IO_L03P_5/D5	AN30		
5	IO_L02N_5/D6	AL30		
5	IO_L02P_5/D7	AK30		
5	IO_L01N_5/RDWR_B	AR31		
5	IO_L01P_5/CS_B	AT31		
6	IO_L01P_6/VRN_6	AU33		
6	IO_L01N_6/VRP_6	AT33		
6	IO_L02P_6	AT32		
6	IO_L02N_6	AR32		
6	IO_L03P_6	AN31		
6	IO_L03N_6/VREF_6	AM31		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 825/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 825 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
6	IO_L04P_6	AR33		
6	IO_L04N_6	AP33		
6	IO_L05P_6	AM32		
6	IO_L05N_6	AL31		
6	IO_L06P_6	AT34		
6	IO_L06N_6	AR34		
6	IO_L73P_6	AU35	NC	
6	IO_L73N_6	AT35	NC	
6	IO_L75P_6	AT38	NC	
6	IO_L75N_6/VREF_6	AT39	NC	
6	IO_L76P_6	AR37	NC	
6	IO_L76N_6	AR38	NC	
6	IO_L78P_6	AP38	NC	
6	IO_L78N_6	AP39	NC	
6	IO_L79P_6	AP36	NC	
6	IO_L79N_6	AP37	NC	
6	IO_L81P_6	AP35	NC	
6	IO_L81N_6/VREF_6	AN35	NC	
6	IO_L82P_6	AN38	NC	
6	IO_L82N_6	AN39	NC	
6	IO_L84P_6	AN36	NC	
6	IO_L84N_6	AN37	NC	
6	IO_L07P_6	AN33		
6	IO_L07N_6	AN34		
6	IO_L08P_6	AK31		
6	IO_L08N_6	AK32		
6	IO_L09P_6	AM37		
6	IO_L09N_6/VREF_6	AM38		
6	IO_L10P_6	AM36		
6	IO_L10N_6	AL35		
6	IO_L11P_6	AJ31		
6	IO_L11N_6	AH30		
6	IO_L12P_6	AM33		
6	IO_L12N_6	AM34		
6	IO_L13P_6	AL38		
6	IO_L13N_6	AL39		
6	IO_L14P_6	AH29		
6	IO_L14N_6	AG29		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 826 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
6	IO_L15P_6	AL37		
6	IO_L15N_6/VREF_6	AK37		
6	IO_L16P_6	AL33		
6	IO_L16N_6	AL34		
6	IO_L17P_6	AH32		
6	IO_L17N_6	AG31		
6	IO_L18P_6	AK38		
6	IO_L18N_6	AK39		
6	IO_L19P_6	AK35		
6	IO_L19N_6	AK36		
6	IO_L20P_6	AF28		
6	IO_L20N_6	AF29		
6	IO_L21P_6	AK33		
6	IO_L21N_6/VREF_6	AK34		
6	IO_L22P_6	AJ38		
6	IO_L22N_6	AJ39		
6	IO_L23P_6	AG30		
6	IO_L23N_6	AF30		
6	IO_L24P_6	AJ36		
6	IO_L24N_6	AJ37		
6	IO_L25P_6	AJ34		
6	IO_L25N_6	AJ35		
6	IO_L26P_6	AF31		
6	IO_L26N_6	AF32		
6	IO_L27P_6	AJ32		
6	IO_L27N_6/VREF_6	AJ33		
6	IO_L28P_6	AH37		
6	IO_L28N_6	AH38		
6	IO_L29P_6	AE27		
6	IO_L29N_6	AD27		
6	IO_L30P_6	AH36		
6	IO_L30N_6	AG35		
6	IO_L31P_6	AH33		
6	IO_L31N_6	AH34		
6	IO_L32P_6	AE28		
6	IO_L32N_6	AE29		
6	IO_L33P_6	AG38		
6	IO_L33N_6/VREF_6	AG39		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 827/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 827 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
6	IO_L34P_6	AG37		
6	IO_L34N_6	AF37		
6	IO_L35P_6	AE30		
6	IO_L35N_6	AE31		
6	IO_L36P_6	AG33		
6	IO_L36N_6	AG34		
6	IO_L37P_6	AF38		
6	IO_L37N_6	AF39		
6	IO_L38P_6	AD28		
6	IO_L38N_6	AC28		
6	IO_L39P_6	AF35		
6	IO_L39N_6/VREF_6	AF36		
6	IO_L40P_6	AF33		
6	IO_L40N_6	AF34		
6	IO_L41P_6	AD29		
6	IO_L41N_6	AD30		
6	IO_L42P_6	AE38		
6	IO_L42N_6	AE39		
6	IO_L43P_6	AE36		
6	IO_L43N_6	AE37		
6	IO_L44P_6	AC27		
6	IO_L44N_6	AB27		
6	IO_L45P_6	AE34		
6	IO_L45N_6/VREF_6	AE35		
6	IO_L46P_6	AE32		
6	IO_L46N_6	AE33		
6	IO_L47P_6	AC30		
6	IO_L47N_6	AC31		
6	IO_L48P_6	AD37		
6	IO_L48N_6	AD38		
6	IO_L49P_6	AD33		
6	IO_L49N_6	AD34		
6	IO_L50P_6	AB28		
6	IO_L50N_6	AB29		
6	IO_L51P_6	AD36		
6	IO_L51N_6/VREF_6	AC36		
6	IO_L52P_6	AD32		
6	IO_L52N_6	AC32		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 828 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
6	IO_L53P_6	AB30		
6	IO_L53N_6	AB31		
6	IO_L54P_6	AC38		
6	IO_L54N_6	AC39		
6	IO_L55P_6	AC34		
6	IO_L55N_6	AC35		
6	IO_L56P_6	AA28		
6	IO_L56N_6	AA29		
6	IO_L57P_6	AB38		
6	IO_L57N_6/VREF_6	AB39		
6	IO_L58P_6	AB36		
6	IO_L58N_6	AB37		
6	IO_L59P_6	AA30		
6	IO_L59N_6	AA31		
6	IO_L60P_6	AB34		
6	IO_L60N_6	AB35		
6	IO_L85P_6	AB32		
6	IO_L85N_6	AB33		
6	IO_L86P_6	AA27		
6	IO_L86N_6	Y27		
6	IO_L87P_6	AA36		
6	IO_L87N_6/VREF_6	AA37		
6	IO_L88P_6	AA34		
6	IO_L88N_6	AA35		
6	IO_L89P_6	Y28		
6	IO_L89N_6	Y29		
6	IO_L90P_6	AA32		
6	IO_L90N_6	AA33		
7	IO_L90P_7	Y36		
7	IO_L90N_7	Y37		
7	IO_L89P_7	Y31		
7	IO_L89N_7	W31		
7	IO_L88P_7	Y32		
7	IO_L88N_7/VREF_7	Y33		
7	IO_L87P_7	W36		
7	IO_L87N_7	W37		
7	IO_L86P_7	W27		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 829/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 829 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
7	IO_L86N_7	W28		
7	IO_L85P_7	W34		
7	IO_L85N_7	W35		
7	IO_L60P_7	W32		
7	IO_L60N_7	W33		
7	IO_L59P_7	W29		
7	IO_L59N_7	W30		
7	IO_L58P_7	V38		
7	IO_L58N_7/VREF_7	V39		
7	IO_L57P_7	V36		
7	IO_L57N_7	V37		
7	IO_L56P_7	V28		
7	IO_L56N_7	V29		
7	IO_L55P_7	V34		
7	IO_L55N_7	V35		
7	IO_L54P_7	V32		
7	IO_L54N_7	V33		
7	IO_L53P_7	V30		
7	IO_L53N_7	V31		
7	IO_L52P_7	U38		
7	IO_L52N_7/VREF_7	U39		
7	IO_L51P_7	T36		
7	IO_L51N_7	U36		
7	IO_L50P_7	V27		
7	IO_L50N_7	U27		
7	IO_L49P_7	U34		
7	IO_L49N_7	U35		
7	IO_L48P_7	T37		
7	IO_L48N_7	T38		
7	IO_L47P_7	U30		
7	IO_L47N_7	U31		
7	IO_L46P_7	T33		
7	IO_L46N_7/VREF_7	T34		
7	IO_L45P_7	R38		
7	IO_L45N_7	R39		
7	IO_L44P_7	T32		
7	IO_L44N_7	U32		
7	IO_L43P_7	R36		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 830 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
7	IO_L43N_7	R37		
7	IO_L42P_7	R34		
7	IO_L42N_7	R35		
7	IO_L41P_7	U28		
7	IO_L41N_7	T28		
7	IO_L40P_7	R32		
7	IO_L40N_7/VREF_7	R33		
7	IO_L39P_7	P38		
7	IO_L39N_7	P39		
7	IO_L38P_7	T29		
7	IO_L38N_7	T30		
7	IO_L37P_7	N37		
7	IO_L37N_7	P37		
7	IO_L36P_7	P35		
7	IO_L36N_7	P36		
7	IO_L35P_7	T27		
7	IO_L35N_7	R27		
7	IO_L34P_7	P33		
7	IO_L34N_7/VREF_7	P34		
7	IO_L33P_7	N38		
7	IO_L33N_7	N39		
7	IO_L32P_7	R28		
7	IO_L32N_7	R29		
7	IO_L31P_7	N35		
7	IO_L31N_7	M36		
7	IO_L30P_7	N33		
7	IO_L30N_7	N34		
7	IO_L29P_7	R30		
7	IO_L29N_7	R31		
7	IO_L28P_7	M37		
7	IO_L28N_7/VREF_7	M38		
7	IO_L27P_7	M33		
7	IO_L27N_7	M34		
7	IO_L26P_7	P28		
7	IO_L26N_7	P29		
7	IO_L25P_7	L38		
7	IO_L25N_7	L39		
7	IO_L24P_7	L36		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 831/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 831 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
7	IO_L24N_7	L37		
7	IO_L23P_7	P31		
7	IO_L23N_7	P32		
7	IO_L22P_7	L34		
7	IO_L22N_7/VREF_7	L35		
7	IO_L21P_7	L32		
7	IO_L21N_7	L33		
7	IO_L20P_7	N29		
7	IO_L20N_7	M29		
7	IO_L19P_7	K38		
7	IO_L19N_7	K39		
7	IO_L18P_7	J37		
7	IO_L18N_7	K37		
7	IO_L17P_7	N30		
7	IO_L17N_7	P30		
7	IO_L16P_7	K35		
7	IO_L16N_7/VREF_7	K36		
7	IO_L15P_7	K34		
7	IO_L15N_7	K33		
7	IO_L14P_7	N31		
7	IO_L14N_7	M32		
7	IO_L13P_7	J38		
7	IO_L13N_7	J39		
7	IO_L12P_7	J35		
7	IO_L12N_7	H36		
7	IO_L11P_7	M30		
7	IO_L11N_7	L31		
7	IO_L10P_7	J33		
7	IO_L10N_7/VREF_7	J34		
7	IO_L09P_7	H37		
7	IO_L09N_7	H38		
7	IO_L08P_7	K31		
7	IO_L08N_7	K32		
7	IO_L07P_7	H33		
7	IO_L07N_7	H34		
7	IO_L84P_7	G38	NC	
7	IO_L84N_7	G39	NC	
7	IO_L82P_7	G36	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 832 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
7	IO_L82N_7/VREF_7	G37	NC	
7	IO_L81P_7	G33	NC	
7	IO_L81N_7	G34	NC	
7	IO_L79P_7	F38	NC	
7	IO_L79N_7	F39	NC	
7	IO_L78P_7	F36	NC	
7	IO_L78N_7	F37	NC	
7	IO_L76P_7	G35	NC	
7	IO_L76N_7/VREF_7	F35	NC	
7	IO_L75P_7	E37	NC	
7	IO_L75N_7	E38	NC	
7	IO_L73P_7	D38	NC	
7	IO_L73N_7	D39	NC	
7	IO_L06P_7	F33		
7	IO_L06N_7	E33		
7	IO_L05P_7	J31		
7	IO_L05N_7	H32		
7	IO_L04P_7	E34		
7	IO_L04N_7/VREF_7	D34		
7	IO_L03P_7	D35		
7	IO_L03N_7	C35		
7	IO_L02P_7	H31		
7	IO_L02N_7	G31		
7	IO_L01P_7/VRN_7	D33		
7	IO_L01N_7/VRP_7	C33		
7	VCCO_7	E39		
7	VCCO_7	U37		
7	VCCO_7	N36		
7	VCCO_7	J36		
7	VCCO_7	E36		
7	VCCO_7	Y35		
7	VCCO_7	U33		
7	VCCO_7	N32		
7	VCCO_7	J32		
7	VCCO_7	F32		
7	VCCO_7	U29		
7	VCCO_7	N28		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 833/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 833 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
7	VCCO_7	P27		
7	VCCO_7	W26		
7	VCCO_7	V26		
7	VCCO_7	U26		
7	VCCO_7	T26		
7	VCCO_7	R26		
6	VCCO_6	AR39		
6	VCCO_6	AC37		
6	VCCO_6	AR36		
6	VCCO_6	AL36		
6	VCCO_6	AG36		
6	VCCO_6	AC33		
6	VCCO_6	AP32		
6	VCCO_6	AL32		
6	VCCO_6	AG32		
6	VCCO_6	AC29		
6	VCCO_6	AG28		
6	VCCO_6	AF27		
6	VCCO_6	AE26		
6	VCCO_6	AD26		
6	VCCO_6	AC26		
6	VCCO_6	AB26		
6	VCCO_6	AA26		
6	VCCO_6	Y26		
5	VCCO_5	AP27		
5	VCCO_5	AK27		
5	VCCO_5	AG26		
5	VCCO_5	AG25		
5	VCCO_5	AF25		
5	VCCO_5	AG24		
5	VCCO_5	AF24		
5	VCCO_5	AP23		
5	VCCO_5	AK23		
5	VCCO_5	AF23		
5	VCCO_5	AF22		
5	VCCO_5	AF21		
4	VCCO_4	AF19		
4	VCCO_4	AF18		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 834 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
4	VCCO_4	AP17		
4	VCCO_4	AK17		
4	VCCO_4	AF17		
4	VCCO_4	AG16		
4	VCCO_4	AF16		
4	VCCO_4	AG15		
4	VCCO_4	AF15		
4	VCCO_4	AG14		
4	VCCO_4	AP13		
4	VCCO_4	AK13		
3	VCCO_3	AE14		
3	VCCO_3	AD14		
3	VCCO_3	AC14		
3	VCCO_3	AB14		
3	VCCO_3	AA14		
3	VCCO_3	Y14		
3	VCCO_3	AF13		
3	VCCO_3	AG12		
3	VCCO_3	AC11		
3	VCCO_3	AP8		
3	VCCO_3	AL8		
3	VCCO_3	AG8		
3	VCCO_3	AC7		
3	VCCO_3	AR4		
3	VCCO_3	AL4		
3	VCCO_3	AG4		
3	VCCO_3	AC3		
3	VCCO_3	AR1		
2	VCCO_2	W14		
2	VCCO_2	V14		
2	VCCO_2	U14		
2	VCCO_2	T14		
2	VCCO_2	R14		
2	VCCO_2	P13		
2	VCCO_2	N12		
2	VCCO_2	U11		
2	VCCO_2	N8		
2	VCCO_2	J8		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 835/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 835 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
2	VCCO_2	F8		
2	VCCO_2	U7		
2	VCCO_2	Y5		
2	VCCO_2	N4		
2	VCCO_2	J4		
2	VCCO_2	E4		
2	VCCO_2	U3		
2	VCCO_2	E1		
1	VCCO_1	N14		
1	VCCO_1	K13		
1	VCCO_1	F13		
1	VCCO_1	P19		
1	VCCO_1	P18		
1	VCCO_1	P17		
1	VCCO_1	K17		
1	VCCO_1	F17		
1	VCCO_1	P16		
1	VCCO_1	N16		
1	VCCO_1	P15		
1	VCCO_1	N15		
0	VCCO_0	K27		
0	VCCO_0	F27		
0	VCCO_0	N26		
0	VCCO_0	P25		
0	VCCO_0	N25		
0	VCCO_0	P24		
0	VCCO_0	N24		
0	VCCO_0	P23		
0	VCCO_0	K23		
0	VCCO_0	F23		
0	VCCO_0	P22		
0	VCCO_0	P21		
N/A	CCLK	AJ10		
N/A	PROG_B	D32		
N/A	DONE	AJ11		
N/A	M0	AP31		
N/A	M1	AJ30		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 836 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	M2	AJ29		
N/A	TCK	E8		
N/A	TDI	L30		
N/A	TDO	L10		
N/A	TMS	F9		
N/A	PWRDWN_B	AP9		
N/A	HSWAP_EN	E32		
N/A	RSVD	D8		
N/A	VBATT	L11		
N/A	DXP	L29		
N/A	DXN	F31		
N/A	AVCCAUXTX2	B35		
N/A	VTTXPAD2	B36		
N/A	TXNPAD2	A36		
N/A	TXPPAD2	A35		
N/A	GNDA2	C34		
N/A	RXPPAD2	A34		
N/A	RXNPAD2	A33		
N/A	VTRXPAD2	B34		
N/A	AVCCAUXRX2	B33		
N/A	AVCCAUXTX4	B31		
N/A	VTTXPAD4	B32		
N/A	TXNPAD4	A32		
N/A	TXPPAD4	A31		
N/A	GNDA4	C31		
N/A	RXPPAD4	A30		
N/A	RXNPAD4	A29		
N/A	VTRXPAD4	B30		
N/A	AVCCAUXRX4	B29		
N/A	AVCCAUXTX5	B27		
N/A	VTTXPAD5	B28		
N/A	TXNPAD5	A28		
N/A	TXPPAD5	A27		
N/A	GNDA5	C27		
N/A	RXPPAD5	A26		
N/A	RXNPAD5	A25		
N/A	VTRXPAD5	B26		
N/A	AVCCAUXRX5	B25		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 837/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 837 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	AVCCAUXTX6	B23		
N/A	VTTXPAD6	B24		
N/A	TXNPAD6	A24		
N/A	TXPPAD6	A23		
N/A	GNDA6	C24		
N/A	RXPPAD6	A22		
N/A	RXNPAD6	A21		
N/A	VTRXPAD6	B22		
N/A	AVCCAUXRX6	B21		
N/A	AVCCAUXTX7	B18		
N/A	VTTXPAD7	B19		
N/A	TXNPAD7	A19		
N/A	TXPPAD7	A18		
N/A	GNDA7	C16		
N/A	RXPPAD7	A17		
N/A	RXNPAD7	A16		
N/A	VTRXPAD7	B17		
N/A	AVCCAUXRX7	B16		
N/A	AVCCAUXTX8	B14		
N/A	VTTXPAD8	B15		
N/A	TXNPAD8	A15		
N/A	TXPPAD8	A14		
N/A	GNDA8	C13		
N/A	RXPPAD8	A13		
N/A	RXNPAD8	A12		
N/A	VTRXPAD8	B13		
N/A	AVCCAUXRX8	B12		
N/A	AVCCAUXTX9	B10		
N/A	VTTXPAD9	B11		
N/A	TXNPAD9	A11		
N/A	TXPPAD9	A10		
N/A	GNDA9	C9		
N/A	RXPPAD9	A9		
N/A	RXNPAD9	A8		
N/A	VTRXPAD9	B9		
N/A	AVCCAUXRX9	B8		
N/A	AVCCAUXTX11	B6		
N/A	VTTXPAD11	B7		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 838 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	TXNPAD11	A7		
N/A	TXPPAD11	A6		
N/A	GNDA11	C6		
N/A	RXPPAD11	A5		
N/A	RXNPAD11	A4		
N/A	VTRXPAD11	B5		
N/A	AVCCAUXRX11	B4		
N/A	AVCCAUXRX14	AV4		
N/A	VTRXPAD14	AV5		
N/A	RXNPAD14	AW4		
N/A	RXPPAD14	AW5		
N/A	GNDA14	AU6		
N/A	TXPPAD14	AW6		
N/A	TXNPAD14	AW7		
N/A	VTTXPAD14	AV7		
N/A	AVCCAUXTX14	AV6		
N/A	AVCCAUXRX16	AV8		
N/A	VTRXPAD16	AV9		
N/A	RXNPAD16	AW8		
N/A	RXPPAD16	AW9		
N/A	GNDA16	AU9		
N/A	TXPPAD16	AW10		
N/A	TXNPAD16	AW11		
N/A	VTTXPAD16	AV11		
N/A	AVCCAUXTX16	AV10		
N/A	AVCCAUXRX17	AV12		
N/A	VTRXPAD17	AV13		
N/A	RXNPAD17	AW12		
N/A	RXPPAD17	AW13		
N/A	GNDA17	AU13		
N/A	TXPPAD17	AW14		
N/A	TXNPAD17	AW15		
N/A	VTTXPAD17	AV15		
N/A	AVCCAUXTX17	AV14		
N/A	AVCCAUXRX18	AV16		
N/A	VTRXPAD18	AV17		
N/A	RXNPAD18	AW16		
N/A	RXPPAD18	AW17		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 839/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 839 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GNDA18	AU16		
N/A	TXPPAD18	AW18		
N/A	TXNPAD18	AW19		
N/A	VTTXPAD18	AV19		
N/A	AVCCAUXTX18	AV18		
N/A	AVCCAUXRX19	AV21		
N/A	VTRXPAD19	AV22		
N/A	RXNPAD19	AW21		
N/A	RXPPAD19	AW22		
N/A	GNDA19	AU24		
N/A	TXPPAD19	AW23		
N/A	TXNPAD19	AW24		
N/A	VTTXPAD19	AV24		
N/A	AVCCAUXTX19	AV23		
N/A	AVCCAUXRX20	AV25		
N/A	VTRXPAD20	AV26		
N/A	RXNPAD20	AW25		
N/A	RXPPAD20	AW26		
N/A	GNDA20	AU27		
N/A	TXPPAD20	AW27		
N/A	TXNPAD20	AW28		
N/A	VTTXPAD20	AV28		
N/A	AVCCAUXTX20	AV27		
N/A	AVCCAUXRX21	AV29		
N/A	VTRXPAD21	AV30		
N/A	RXNPAD21	AW29		
N/A	RXPPAD21	AW30		
N/A	GNDA21	AU31		
N/A	TXPPAD21	AW31		
N/A	TXNPAD21	AW32		
N/A	VTTXPAD21	AV32		
N/A	AVCCAUXTX21	AV31		
N/A	AVCCAUXRX23	AV33		
N/A	VTRXPAD23	AV34		
N/A	RXNPAD23	AW33		
N/A	RXPPAD23	AW34		
N/A	GNDA23	AU34		
N/A	TXPPAD23	AW35		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 840 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	TXNPAD23	AW36		
N/A	VTTXPAD23	AV36		
N/A	AVCCAUXTX23	AV35		
N/A	VCCINT	AH28		
N/A	VCCINT	M28		
N/A	VCCINT	AG27		
N/A	VCCINT	N27		
N/A	VCCINT	AF26		
N/A	VCCINT	P26		
N/A	VCCINT	AE25		
N/A	VCCINT	AD25		
N/A	VCCINT	AC25		
N/A	VCCINT	AB25		
N/A	VCCINT	AA25		
N/A	VCCINT	Y25		
N/A	VCCINT	W25		
N/A	VCCINT	V25		
N/A	VCCINT	U25		
N/A	VCCINT	T25		
N/A	VCCINT	R25		
N/A	VCCINT	AE24		
N/A	VCCINT	AD24		
N/A	VCCINT	T24		
N/A	VCCINT	R24		
N/A	VCCINT	AE23		
N/A	VCCINT	R23		
N/A	VCCINT	AE22		
N/A	VCCINT	R22		
N/A	VCCINT	AE21		
N/A	VCCINT	R21		
N/A	VCCINT	AE20		
N/A	VCCINT	R20		
N/A	VCCINT	AE19		
N/A	VCCINT	R19		
N/A	VCCINT	AE18		
N/A	VCCINT	R18		
N/A	VCCINT	AE17		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 841/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 841 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	VCCINT	R17		
N/A	VCCINT	AE16		
N/A	VCCINT	AD16		
N/A	VCCINT	T16		
N/A	VCCINT	R16		
N/A	VCCINT	AE15		
N/A	VCCINT	AD15		
N/A	VCCINT	AC15		
N/A	VCCINT	AB15		
N/A	VCCINT	AA15		
N/A	VCCINT	Y15		
N/A	VCCINT	W15		
N/A	VCCINT	V15		
N/A	VCCINT	U15		
N/A	VCCINT	T15		
N/A	VCCINT	R15		
N/A	VCCINT	AF14		
N/A	VCCINT	P14		
N/A	VCCINT	AG13		
N/A	VCCINT	N13		
N/A	VCCINT	AH12		
N/A	VCCINT	M12		
N/A	VCCAUX	AV39		
N/A	VCCAUX	AA39		
N/A	VCCAUX	Y39		
N/A	VCCAUX	W39		
N/A	VCCAUX	B39		
N/A	VCCAUX	AW38		
N/A	VCCAUX	Y38		
N/A	VCCAUX	A38		
N/A	VCCAUX	AR35		
N/A	VCCAUX	E35		
N/A	VCCAUX	AP34		
N/A	VCCAUX	F34		
N/A	VCCAUX	AW20		
N/A	VCCAUX	AV20		
N/A	VCCAUX	B20		
N/A	VCCAUX	A20		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 842 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	VCCAUX	AP6		
N/A	VCCAUX	F6		
N/A	VCCAUX	AR5		
N/A	VCCAUX	E5		
N/A	VCCAUX	AW2		
N/A	VCCAUX	Y2		
N/A	VCCAUX	A2		
N/A	VCCAUX	AV1		
N/A	VCCAUX	AA1		
N/A	VCCAUX	Y1		
N/A	VCCAUX	W1		
N/A	VCCAUX	B1		
N/A	GND	A3		
N/A	GND	AV2		
N/A	GND	AU2		
N/A	GND	AA2		
N/A	GND	W2		
N/A	GND	C2		
N/A	GND	B2		
N/A	GND	AU1		
N/A	GND	AM1		
N/A	GND	AH1		
N/A	GND	AD1		
N/A	GND	T1		
N/A	GND	M1		
N/A	GND	H1		
N/A	GND	C1		
N/A	GND	AD5		
N/A	GND	T5		
N/A	GND	M5		
N/A	GND	H5		
N/A	GND	AU4		
N/A	GND	AT4		
N/A	GND	D4		
N/A	GND	C4		
N/A	GND	AW3		
N/A	GND	AV3		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 843/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 843 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GND	AU3		
N/A	GND	AT3		
N/A	GND	D3		
N/A	GND	C3		
N/A	GND	B3		
N/A	GND	AN12		
N/A	GND	G12		
N/A	GND	C12		
N/A	GND	Y10		
N/A	GND	AH9		
N/A	GND	AD9		
N/A	GND	T9		
N/A	GND	M9		
N/A	GND	AU8		
N/A	GND	AN8		
N/A	GND	G8		
N/A	GND	C8		
N/A	GND	Y6		
N/A	GND	AM5		
N/A	GND	AH5		
N/A	GND	T17		
N/A	GND	AT16		
N/A	GND	AN16		
N/A	GND	AJ16		
N/A	GND	AC16		
N/A	GND	AB16		
N/A	GND	AA16		
N/A	GND	Y16		
N/A	GND	W16		
N/A	GND	V16		
N/A	GND	U16		
N/A	GND	L16		
N/A	GND	G16		
N/A	GND	D16		
N/A	GND	AU12		
N/A	GND	AB18		
N/A	GND	AA18		
N/A	GND	Y18		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 844 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GND	W18		
N/A	GND	V18		
N/A	GND	U18		
N/A	GND	T18		
N/A	GND	AD17		
N/A	GND	AC17		
N/A	GND	AB17		
N/A	GND	AA17		
N/A	GND	Y17		
N/A	GND	W17		
N/A	GND	V17		
N/A	GND	U17		
N/A	GND	P20		
N/A	GND	L20		
N/A	GND	G20		
N/A	GND	C20		
N/A	GND	AD19		
N/A	GND	AC19		
N/A	GND	AB19		
N/A	GND	AA19		
N/A	GND	Y19		
N/A	GND	W19		
N/A	GND	V19		
N/A	GND	U19		
N/A	GND	T19		
N/A	GND	AD18		
N/A	GND	AC18		
N/A	GND	U21		
N/A	GND	T21		
N/A	GND	AU20		
N/A	GND	AN20		
N/A	GND	AJ20		
N/A	GND	AF20		
N/A	GND	AD20		
N/A	GND	AC20		
N/A	GND	AB20		
N/A	GND	AA20		
N/A	GND	Y20		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 845/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 845 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GND	W20		
N/A	GND	V20		
N/A	GND	U20		
N/A	GND	T20		
N/A	GND	AC22		
N/A	GND	AB22		
N/A	GND	AA22		
N/A	GND	Y22		
N/A	GND	W22		
N/A	GND	V22		
N/A	GND	U22		
N/A	GND	T22		
N/A	GND	AD21		
N/A	GND	AC21		
N/A	GND	AB21		
N/A	GND	AA21		
N/A	GND	Y21		
N/A	GND	W21		
N/A	GND	V21		
N/A	GND	B38		
N/A	GND	AW37		
N/A	GND	AV37		
N/A	GND	AU37		
N/A	GND	AT37		
N/A	GND	D37		
N/A	GND	C37		
N/A	GND	B37		
N/A	GND	A37		
N/A	GND	AU36		
N/A	GND	AT36		
N/A	GND	D36		
N/A	GND	C36		
N/A	GND	AM35		
N/A	GND	AH35		
N/A	GND	AD35		
N/A	GND	T35		
N/A	GND	M35		
N/A	GND	H35		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 846 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GND	Y34		
N/A	GND	AU32		
N/A	GND	AN32		
N/A	GND	G32		
N/A	GND	C32		
N/A	GND	AH31		
N/A	GND	AD31		
N/A	GND	T31		
N/A	GND	M31		
N/A	GND	Y30		
N/A	GND	AU28		
N/A	GND	AN28		
N/A	GND	G28		
N/A	GND	C28		
N/A	GND	AT24		
N/A	GND	AN24		
N/A	GND	AJ24		
N/A	GND	AC24		
N/A	GND	AB24		
N/A	GND	AA24		
N/A	GND	Y24		
N/A	GND	W24		
N/A	GND	V24		
N/A	GND	U24		
N/A	GND	L24		
N/A	GND	G24		
N/A	GND	D24		
N/A	GND	AD23		
N/A	GND	AC23		
N/A	GND	AB23		
N/A	GND	AA23		
N/A	GND	Y23		
N/A	GND	W23		
N/A	GND	V23		
N/A	GND	U23		
N/A	GND	T23		
N/A	GND	AD22		
N/A	GND	AU39		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 847/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 847 of 947

Table 12: **FF1517 — XC2VP50 and XC2VP70**


Bank	Pin Description	Pin Number	No Connects	
			XC2VP50	XC2VP70
N/A	GND	AM39		
N/A	GND	AH39		
N/A	GND	AD39		
N/A	GND	T39		
N/A	GND	M39		
N/A	GND	H39		
N/A	GND	C39		
N/A	GND	AV38		
N/A	GND	AU38		
N/A	GND	AA38		
N/A	GND	W38		
N/A	GND	C38		

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 848 of 947

FF1517 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

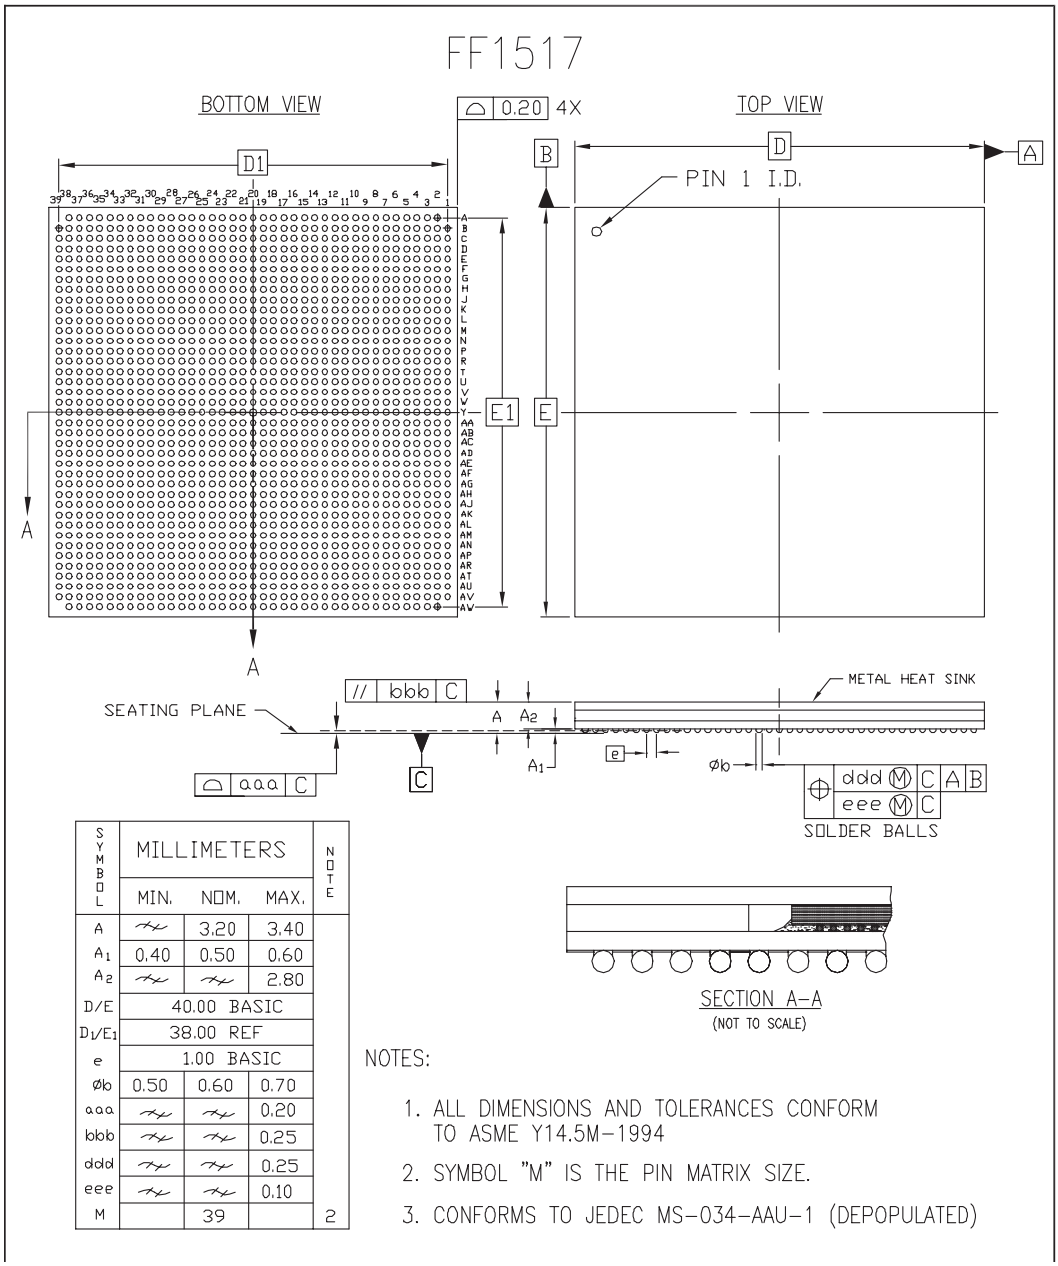

SYMBOL	MILLIMETERS MIN.	NOM.	MAX.	NOTE
A		3.20	3.40	
A_1	0.40	0.50	0.60	
A_2			2.80	
D/E		40.00 BASIC		
D_1/E_1		38.00 REF		
e		1.00 BASIC		
øb	0.50	0.60	0.70	
aaa			0.20	
bbb			0.25	
ddd			0.25	
eee			0.10	
M		39		2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-AAU-1 (DEPOPULATED)

Figure 8: **FF1517 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 849/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 849 of 947

FF1704 Flip-Chip Fine-Pitch BGA Package

As shown in Table 13, XC2VP70, XC2VP100, and XC2VP125 Virtex-II Pro devices are available in the FF1704 flip-chip fine-pitch BGA package. Following this table are the FF1704 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
0	IO_L01N_0/VRP_0	G34			
0	IO_L01P_0/VRN_0	H34			
0	IO_L02N_0	F34			
0	IO_L02P_0	E34			
0	IO_L03N_0	C34			
0	IO_L03P_0/VREF_0	D34			
0	IO_L05_0/No_Pair	K32			
0	IO_L06N_0	H33			
0	IO_L06P_0	J33			
0	IO_L07N_0	F33			
0	IO_L07P_0	G33			
0	IO_L08N_0	E33			
0	IO_L08P_0	D33			
0	IO_L09N_0	H32			
0	IO_L09P_0/VREF_0	J32			
0	IO_L19N_0	E32			
0	IO_L19P_0	F32			
0	IO_L20N_0	C33			
0	IO_L20P_0	C32			
0	IO_L21N_0	K31			
0	IO_L21P_0	L31			
0	IO_L25N_0	H31			
0	IO_L25P_0	J31			
0	IO_L26N_0	G31			
0	IO_L26P_0	F31			
0	IO_L27N_0	D31			
0	IO_L27P_0/VREF_0	E31			
0	IO_L28N_0	L30			
0	IO_L28P_0	M30			
0	IO_L29N_0	J30			
0	IO_L29P_0	K30			
0	IO_L30N_0	G30			
0	IO_L30P_0	H30			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 850 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
0	IO_L34N_0	E30			
0	IO_L34P_0	F30			
0	IO_L35N_0	D30			
0	IO_L35P_0	C30			
0	IO_L36N_0	M28			
0	IO_L36P_0/VREF_0	M29			
0	IO_L78N_0	K29	NC		
0	IO_L78P_0	L29	NC		
0	IO_L83_0/No_Pair	H29	NC		
0	IO_L84N_0	F29	NC		
0	IO_L84P_0	G29	NC		
0	IO_L85N_0	D29	NC		
0	IO_L85P_0	E29	NC		
0	IO_L86N_0	L28	NC		
0	IO_L86P_0	K28	NC		
0	IO_L87N_0	H28	NC		
0	IO_L87P_0/VREF_0	J28	NC		
0	IO_L37N_0	E28			
0	IO_L37P_0	F28			
0	IO_L38N_0	C29			
0	IO_L38P_0	C28			
0	IO_L39N_0	L27			
0	IO_L39P_0	M27			
0	IO_L43N_0	J27			
0	IO_L43P_0	K27			
0	IO_L44N_0	H27			
0	IO_L44P_0	G27			
0	IO_L45N_0	E27			
0	IO_L45P_0/VREF_0	F27			
0	IO_L46N_0	M25			
0	IO_L46P_0	M26			
0	IO_L47N_0	L26			
0	IO_L47P_0	K26			
0	IO_L48N_0	H26			
0	IO_L48P_0	J26			
0	IO_L49N_0	F26			
0	IO_L49P_0	G26			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 851/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 851 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
0	IO_L50_0/No_Pair	D27			
0	IO_L53_0/No_Pair	D26			
0	IO_L54N_0	K25			
0	IO_L54P_0	L25			
0	IO_L55N_0	G25			
0	IO_L55P_0	H25			
0	IO_L56N_0	E26			
0	IO_L56P_0	E25			
0	IO_L57N_0	C25			
0	IO_L57P_0/VREF_0	C26			
0	IO_L58N_0	L24			
0	IO_L58P_0	M24			
0	IO_L59N_0	J24			
0	IO_L59P_0	K24			
0	IO_L60N_0	G24			
0	IO_L60P_0	H24			
0	IO_L64N_0	E24			
0	IO_L64P_0	F24			
0	IO_L65N_0	D24			
0	IO_L65P_0	C24			
0	IO_L66N_0	M22			
0	IO_L66P_0/VREF_0	M23			
0	IO_L67N_0	K23			
0	IO_L67P_0	L23			
0	IO_L68N_0	J23			
0	IO_L68P_0	H23			
0	IO_L69N_0	E23			
0	IO_L69P_0/VREF_0	F23			
0	IO_L73N_0	C23			
0	IO_L73P_0	D23			
0	IO_L74N_0/GCLK7P	K22			
0	IO_L74P_0/GCLK6S	J22			
0	IO_L75N_0/GCLK5P	F22			
0	IO_L75P_0/GCLK4S	G22			
1	IO_L75N_1/GCLK3P	G21			
1	IO_L75P_1/GCLK2S	F21			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 852 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
1	IO_L74N_1/GCLK1P	J21			
1	IO_L74P_1/GCLK0S	K21			
1	IO_L73N_1	D20			
1	IO_L73P_1	C20			
1	IO_L69N_1/VREF_1	F20			
1	IO_L69P_1	E20			
1	IO_L68N_1	H20			
1	IO_L68P_1	J20			
1	IO_L67N_1	L20			
1	IO_L67P_1	K20			
1	IO_L66N_1/VREF_1	M20			
1	IO_L66P_1	M21			
1	IO_L65N_1	C19			
1	IO_L65P_1	D19			
1	IO_L64N_1	F19			
1	IO_L64P_1	E19			
1	IO_L60N_1	H19			
1	IO_L60P_1	G19			
1	IO_L59N_1	K19			
1	IO_L59P_1	J19			
1	IO_L58N_1	M19			
1	IO_L58P_1	L19			
1	IO_L57N_1/VREF_1	C17			
1	IO_L57P_1	C18			
1	IO_L56N_1	E18			
1	IO_L56P_1	E17			
1	IO_L55N_1	H18			
1	IO_L55P_1	G18			
1	IO_L54N_1	L18			
1	IO_L54P_1	K18			
1	IO_L53_1/No_Pair	D17			
1	IO_L50_1/No_Pair	D16			
1	IO_L49N_1	G17			
1	IO_L49P_1	F17			
1	IO_L48N_1	J17			
1	IO_L48P_1	H17			
1	IO_L47N_1	K17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 853/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 853 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
1	IO_L47P_1	L17			
1	IO_L46N_1	M17			
1	IO_L46P_1	M18			
1	IO_L45N_1/VREF_1	F16			
1	IO_L45P_1	E16			
1	IO_L44N_1	G16			
1	IO_L44P_1	H16			
1	IO_L43N_1	K16			
1	IO_L43P_1	J16			
1	IO_L39N_1	M16			
1	IO_L39P_1	L16			
1	IO_L38N_1	C15			
1	IO_L38P_1	C14			
1	IO_L37N_1	F15			
1	IO_L37P_1	E15			
1	IO_L87N_1/VREF_1	J15	NC		
1	IO_L87P_1	H15	NC		
1	IO_L86N_1	K15	NC		
1	IO_L86P_1	L15	NC		
1	IO_L85N_1	E14	NC		
1	IO_L85P_1	D14	NC		
1	IO_L84N_1	G14	NC		
1	IO_L84P_1	F14	NC		
1	IO_L83_1/No_Pair	H14	NC		
1	IO_L78N_1	L14	NC		
1	IO_L78P_1	K14	NC		
1	IO_L36N_1/VREF_1	M14			
1	IO_L36P_1	M15			
1	IO_L35N_1	C13			
1	IO_L35P_1	D13			
1	IO_L34N_1	F13			
1	IO_L34P_1	E13			
1	IO_L30N_1	H13			
1	IO_L30P_1	G13			
1	IO_L29N_1	K13			
1	IO_L29P_1	J13			
1	IO_L28N_1	M13			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 854 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
1	IO_L28P_1	L13			
1	IO_L27N_1/VREF_1	E12			
1	IO_L27P_1	D12			
1	IO_L26N_1	F12			
1	IO_L26P_1	G12			
1	IO_L25N_1	J12			
1	IO_L25P_1	H12			
1	IO_L21N_1	L12			
1	IO_L21P_1	K12			
1	IO_L20N_1	C11			
1	IO_L20P_1	C10			
1	IO_L19N_1	F11			
1	IO_L19P_1	E11			
1	IO_L09N_1/VREF_1	J11			
1	IO_L09P_1	H11			
1	IO_L08N_1	D10			
1	IO_L08P_1	E10			
1	IO_L07N_1	G10			
1	IO_L07P_1	F10			
1	IO_L06N_1	J10			
1	IO_L06P_1	H10			
1	IO_L05_1/No_Pair	K11			
1	IO_L03N_1/VREF_1	D9			
1	IO_L03P_1	C9			
1	IO_L02N_1	E9			
1	IO_L02P_1	F9			
1	IO_L01N_1/VRP_1	H9			
1	IO_L01P_1/VRN_1	G9			
2	IO_L01N_2/VRP_2	C5			
2	IO_L01P_2/VRN_2	C6			
2	IO_L02N_2	E7			
2	IO_L02P_2	D7			
2	IO_L03N_2	E6			
2	IO_L03P_2	D6			
2	IO_L04N_2/VREF_2	G6			
2	IO_L04P_2	F7			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 855 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
2	IO_L05N_2	D3			
2	IO_L05P_2	E3			
2	IO_L06N_2	D1			
2	IO_L06P_2	D2			
2	IO_L73N_2	E1			
2	IO_L73P_2	E2			
2	IO_L74N_2	F4			
2	IO_L74P_2	F3			
2	IO_L75N_2	F1			
2	IO_L75P_2	F2			
2	IO_L76N_2/VREF_2	G3			
2	IO_L76P_2	G4			
2	IO_L77N_2	G2			
2	IO_L77P_2	G1			
2	IO_L78N_2	G5			
2	IO_L78P_2	H6			
2	IO_L79N_2	H4			
2	IO_L79P_2	H5			
2	IO_L80N_2	H3			
2	IO_L80P_2	H2			
2	IO_L81N_2	H7			
2	IO_L81P_2	J8			
2	IO_L82N_2/VREF_2	J6			
2	IO_L82P_2	J7			
2	IO_L83N_2	J5			
2	IO_L83P_2	J4			
2	IO_L84N_2	J1			
2	IO_L84P_2	J2			
2	IO_L07N_2	K9			
2	IO_L07P_2	L10			
2	IO_L08N_2	K6			
2	IO_L08P_2	K5			
2	IO_L09N_2	K8			
2	IO_L09P_2	K7			
2	IO_L10N_2/VREF_2	K2			
2	IO_L10P_2	K1			
2	IO_L11N_2	L8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 856 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
2	IO_L11P_2	L9			
2	IO_L12N_2	L6			
2	IO_L12P_2	L7			
2	IO_L13N_2	K3			
2	IO_L13P_2	L3			
2	IO_L14N_2	L5			
2	IO_L14P_2	L4			
2	IO_L15N_2	L1			
2	IO_L15P_2	L2			
2	IO_L16N_2/VREF_2	M7			
2	IO_L16P_2	M8			
2	IO_L17N_2	M11			
2	IO_L17P_2	M12			
2	IO_L18N_2	M9			
2	IO_L18P_2	M10			
2	IO_L19N_2	M2			
2	IO_L19P_2	M3			
2	IO_L20N_2	M4			
2	IO_L20P_2	M5			
2	IO_L21N_2	N7			
2	IO_L21P_2	N8			
2	IO_L22N_2/VREF_2	N5			
2	IO_L22P_2	N6			
2	IO_L23N_2	N9			
2	IO_L23P_2	N10			
2	IO_L24N_2	N3			
2	IO_L24P_2	N4			
2	IO_L25N_2	N1			
2	IO_L25P_2	N2			
2	IO_L26N_2	N11			
2	IO_L26P_2	N12			
2	IO_L27N_2	P9			
2	IO_L27P_2	P10			
2	IO_L28N_2/VREF_2	P7			
2	IO_L28P_2	P8			
2	IO_L29N_2	P11			
2	IO_L29P_2	P12			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 857/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 857 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
2	IO_L30N_2	P5			
2	IO_L30P_2	P6			
2	IO_L31N_2	P1			
2	IO_L31P_2	P2			
2	IO_L32N_2	R9			
2	IO_L32P_2	R10			
2	IO_L33N_2	R5			
2	IO_L33P_2	R6			
2	IO_L34N_2/VREF_2	P3			
2	IO_L34P_2	R3			
2	IO_L35N_2	R1			
2	IO_L35P_2	R2			
2	IO_L36N_2	R11			
2	IO_L36P_2	R12			
2	IO_L37N_2	T6			
2	IO_L37P_2	T7			
2	IO_L38N_2	T8			
2	IO_L38P_2	R8			
2	IO_L39N_2	T4			
2	IO_L39P_2	T5			
2	IO_L40N_2/VREF_2	T2			
2	IO_L40P_2	T3			
2	IO_L41N_2	T10			
2	IO_L41P_2	T11			
2	IO_L42N_2	U7			
2	IO_L42P_2	U8			
2	IO_L43N_2	U5			
2	IO_L43P_2	U6			
2	IO_L44N_2	U9			
2	IO_L44P_2	U10			
2	IO_L45N_2	U3			
2	IO_L45P_2	U4			
2	IO_L46N_2/VREF_2	U1			
2	IO_L46P_2	U2			
2	IO_L47N_2	T12			
2	IO_L47P_2	U12			
2	IO_L48N_2	V10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 858 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
2	IO_L48P_2	V11			
2	IO_L49N_2	V7			
2	IO_L49P_2	V8			
2	IO_L50N_2	U11			
2	IO_L50P_2	V12			
2	IO_L51N_2	V4			
2	IO_L51P_2	V5			
2	IO_L52N_2/VREF_2	V1			
2	IO_L52P_2	V2			
2	IO_L53N_2	W9			
2	IO_L53P_2	W10			
2	IO_L54N_2	W7			
2	IO_L54P_2	W8			
2	IO_L55N_2	W5			
2	IO_L55P_2	W6			
2	IO_L56N_2	W11			
2	IO_L56P_2	W12			
2	IO_L57N_2	W3			
2	IO_L57P_2	W4			
2	IO_L58N_2/VREF_2	W1			
2	IO_L58P_2	W2			
2	IO_L59N_2	Y9			
2	IO_L59P_2	Y10			
2	IO_L60N_2	Y6			
2	IO_L60P_2	Y7			
2	IO_L85N_2	Y3			
2	IO_L85P_2	Y4			
2	IO_L86N_2	Y11			
2	IO_L86P_2	Y12			
2	IO_L87N_2	AA9			
2	IO_L87P_2	AA10			
2	IO_L88N_2/VREF_2	AA6			
2	IO_L88P_2	AA7			
2	IO_L89N_2	AA12			
2	IO_L89P_2	AB12			
2	IO_L90N_2	AA3			
2	IO_L90P_2	AA4			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 859 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	IO_L90N_3	AB3			
3	IO_L90P_3	AB4			
3	IO_L89N_3	AB6			
3	IO_L89P_3	AB7			
3	IO_L88N_3	AB9			
3	IO_L88P_3	AB10			
3	IO_L87N_3/VREF_3	AC3			
3	IO_L87P_3	AC4			
3	IO_L86N_3	AC11			
3	IO_L86P_3	AC12			
3	IO_L85N_3	AC6			
3	IO_L85P_3	AC7			
3	IO_L60N_3	AC9			
3	IO_L60P_3	AC10			
3	IO_L59N_3	AD9			
3	IO_L59P_3	AD10			
3	IO_L58N_3	AD1			
3	IO_L58P_3	AD2			
3	IO_L57N_3/VREF_3	AD3			
3	IO_L57P_3	AD4			
3	IO_L56N_3	AD11			
3	IO_L56P_3	AD12			
3	IO_L55N_3	AD5			
3	IO_L55P_3	AD6			
3	IO_L54N_3	AD7			
3	IO_L54P_3	AD8			
3	IO_L53N_3	AE10			
3	IO_L53P_3	AE11			
3	IO_L52N_3	AE1			
3	IO_L52P_3	AE2			
3	IO_L51N_3/VREF_3	AE4			
3	IO_L51P_3	AE5			
3	IO_L50N_3	AF11			
3	IO_L50P_3	AE12			
3	IO_L49N_3	AE7			
3	IO_L49P_3	AE8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 860 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	IO_L48N_3	AF1			
3	IO_L48P_3	AF2			
3	IO_L47N_3	AG12			
3	IO_L47P_3	AF12			
3	IO_L46N_3	AF3			
3	IO_L46P_3	AF4			
3	IO_L45N_3/VREF_3	AF5			
3	IO_L45P_3	AF6			
3	IO_L44N_3	AF7			
3	IO_L44P_3	AF8			
3	IO_L43N_3	AF9			
3	IO_L43P_3	AF10			
3	IO_L42N_3	AG2			
3	IO_L42P_3	AG3			
3	IO_L41N_3	AG10			
3	IO_L41P_3	AG11			
3	IO_L40N_3	AG4			
3	IO_L40P_3	AG5			
3	IO_L39N_3/VREF_3	AG6			
3	IO_L39P_3	AG7			
3	IO_L38N_3	AG8			
3	IO_L38P_3	AH8			
3	IO_L37N_3	AH1			
3	IO_L37P_3	AH2			
3	IO_L36N_3	AH3			
3	IO_L36P_3	AJ3			
3	IO_L35N_3	AH11			
3	IO_L35P_3	AH12			
3	IO_L34N_3	AH5			
3	IO_L34P_3	AH6			
3	IO_L33N_3/VREF_3	AH9			
3	IO_L33P_3	AH10			
3	IO_L32N_3	AJ11			
3	IO_L32P_3	AJ12			
3	IO_L31N_3	AJ1			
3	IO_L31P_3	AJ2			
3	IO_L30N_3	AJ5			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 861/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 861 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	IO_L30P_3	AJ6			
3	IO_L29N_3	AJ9			
3	IO_L29P_3	AJ10			
3	IO_L28N_3	AJ7			
3	IO_L28P_3	AJ8			
3	IO_L27N_3/VREF_3	AK1			
3	IO_L27P_3	AK2			
3	IO_L26N_3	AK11			
3	IO_L26P_3	AK12			
3	IO_L25N_3	AK3			
3	IO_L25P_3	AK4			
3	IO_L24N_3	AK5			
3	IO_L24P_3	AK6			
3	IO_L23N_3	AK9			
3	IO_L23P_3	AK10			
3	IO_L22N_3	AK7			
3	IO_L22P_3	AK8			
3	IO_L21N_3/VREF_3	AL2			
3	IO_L21P_3	AL3			
3	IO_L20N_3	AL11			
3	IO_L20P_3	AL12			
3	IO_L19N_3	AL4			
3	IO_L19P_3	AL5			
3	IO_L18N_3	AL7			
3	IO_L18P_3	AL8			
3	IO_L17N_3	AL9			
3	IO_L17P_3	AL10			
3	IO_L16N_3	AM1			
3	IO_L16P_3	AM2			
3	IO_L15N_3/VREF_3	AM3			
3	IO_L15P_3	AN3			
3	IO_L14N_3	AM8			
3	IO_L14P_3	AM9			
3	IO_L13N_3	AM4			
3	IO_L13P_3	AM5			
3	IO_L12N_3	AM6			
3	IO_L12P_3	AM7			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 862 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	IO_L11N_3	AN9			
3	IO_L11P_3	AM10			
3	IO_L10N_3	AN1			
3	IO_L10P_3	AN2			
3	IO_L09N_3/VREF_3	AN5			
3	IO_L09P_3	AN6			
3	IO_L08N_3	AN7			
3	IO_L08P_3	AN8			
3	IO_L07N_3	AP1			
3	IO_L07P_3	AP2			
3	IO_L84N_3	AP4			
3	IO_L84P_3	AP5			
3	IO_L83N_3	AR7			
3	IO_L83P_3	AP8			
3	IO_L82N_3	AP6			
3	IO_L82P_3	AP7			
3	IO_L81N_3/VREF_3	AR2			
3	IO_L81P_3	AR3			
3	IO_L80N_3	AT5			
3	IO_L80P_3	AR6			
3	IO_L79N_3	AR4			
3	IO_L79P_3	AR5			
3	IO_L78N_3	AT1			
3	IO_L78P_3	AT2			
3	IO_L77N_3	AT3			
3	IO_L77P_3	AT4			
3	IO_L76N_3	AU1			
3	IO_L76P_3	AU2			
3	IO_L75N_3/VREF_3	AU3			
3	IO_L75P_3	AU4			
3	IO_L74N_3	AV3			
3	IO_L74P_3	AW3			
3	IO_L73N_3	AV1			
3	IO_L73P_3	AV2			
3	IO_L06N_3	AW1			
3	IO_L06P_3	AW2			
3	IO_L05N_3	AT8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 863/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 863 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	IO_L05P_3	AU8			
3	IO_L04N_3	AT6			
3	IO_L04P_3	AU7			
3	IO_L03N_3/VREF_3	AY5			
3	IO_L03P_3	AY6			
3	IO_L02N_3	AV7			
3	IO_L02P_3	AW7			
3	IO_L01N_3/VRP_3	AV6			
3	IO_L01P_3/VRN_3	AW6			
4	IO_L01N_4/BUSY/DOUT(1)	AT9			
4	IO_L01P_4/INIT_B	AR9			
4	IO_L02N_4/D0/DIN(1)	AU9			
4	IO_L02P_4/D1	AV9			
4	IO_L03N_4/D2	AY9			
4	IO_L03P_4/D3	AW9			
4	IO_L05_4/No_Pair	AN11			
4	IO_L06N_4/VRP_4	AR10			
4	IO_L06P_4/VRN_4	AP10			
4	IO_L07N_4	AU10			
4	IO_L07P_4/VREF_4	AT10			
4	IO_L08N_4	AV10			
4	IO_L08P_4	AW10			
4	IO_L09N_4	AR11			
4	IO_L09P_4/VREF_4	AP11			
4	IO_L19N_4	AV11			
4	IO_L19P_4	AU11			
4	IO_L20N_4	AY10			
4	IO_L20P_4	AY11			
4	IO_L21N_4	AN12			
4	IO_L21P_4	AM12			
4	IO_L25N_4	AR12			
4	IO_L25P_4	AP12			
4	IO_L26N_4	AT12			
4	IO_L26P_4	AU12			
4	IO_L27N_4	AW12			
4	IO_L27P_4/VREF_4	AV12			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 864 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
4	IO_L28N_4	AM13			
4	IO_L28P_4	AL13			
4	IO_L29N_4	AP13			
4	IO_L29P_4	AN13			
4	IO_L30N_4	AT13			
4	IO_L30P_4	AR13			
4	IO_L34N_4	AV13			
4	IO_L34P_4	AU13			
4	IO_L35N_4	AW13			
4	IO_L35P_4	AY13			
4	IO_L36N_4	AL15			
4	IO_L36P_4/VREF_4	AL14			
4	IO_L78N_4	AN14	NC		
4	IO_L78P_4	AM14	NC		
4	IO_L83_4/No_Pair	AR14	NC		
4	IO_L84N_4	AU14	NC		
4	IO_L84P_4	AT14	NC		
4	IO_L85N_4	AW14	NC		
4	IO_L85P_4	AV14	NC		
4	IO_L86N_4	AM15	NC		
4	IO_L86P_4	AN15	NC		
4	IO_L87N_4	AR15	NC		
4	IO_L87P_4/VREF_4	AP15	NC		
4	IO_L37N_4	AV15			
4	IO_L37P_4	AU15			
4	IO_L38N_4	AY14			
4	IO_L38P_4	AY15			
4	IO_L39N_4	AM16			
4	IO_L39P_4	AL16			
4	IO_L43N_4	AP16			
4	IO_L43P_4	AN16			
4	IO_L44N_4	AR16			
4	IO_L44P_4	AT16			
4	IO_L45N_4	AV16			
4	IO_L45P_4/VREF_4	AU16			
4	IO_L46N_4	AL18			
4	IO_L46P_4	AL17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 865/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 865 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
4	IO_L47N_4	AM17			
4	IO_L47P_4	AN17			
4	IO_L48N_4	AR17			
4	IO_L48P_4	AP17			
4	IO_L49N_4	AU17			
4	IO_L49P_4	AT17			
4	IO_L50_4/No_Pair	AW16			
4	IO_L53_4/No_Pair	AW17			
4	IO_L54N_4	AN18			
4	IO_L54P_4	AM18			
4	IO_L55N_4	AT18			
4	IO_L55P_4	AR18			
4	IO_L56N_4	AV17			
4	IO_L56P_4	AV18			
4	IO_L57N_4	AY18			
4	IO_L57P_4/VREF_4	AY17			
4	IO_L58N_4	AM19			
4	IO_L58P_4	AL19			
4	IO_L59N_4	AP19			
4	IO_L59P_4	AN19			
4	IO_L60N_4	AT19			
4	IO_L60P_4	AR19			
4	IO_L64N_4	AV19			
4	IO_L64P_4	AU19			
4	IO_L65N_4	AW19			
4	IO_L65P_4	AY19			
4	IO_L66N_4	AL21			
4	IO_L66P_4/VREF_4	AL20			
4	IO_L67N_4	AN20			
4	IO_L67P_4	AM20			
4	IO_L68N_4	AP20			
4	IO_L68P_4	AR20			
4	IO_L69N_4	AV20			
4	IO_L69P_4/VREF_4	AU20			
4	IO_L73N_4	AY20			
4	IO_L73P_4	AW20			
4	IO_L74N_4/GCLK3S	AN21			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 866 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
4	IO_L74P_4/GCLK2P	AP21			
4	IO_L75N_4/GCLK1S	AU21			
4	IO_L75P_4/GCLK0P	AT21			
5	IO_L75N_5/GCLK7S	AT22			
5	IO_L75P_5/GCLK6P	AU22			
5	IO_L74N_5/GCLK5S	AP22			
5	IO_L74P_5/GCLK4P	AN22			
5	IO_L73N_5	AW23			
5	IO_L73P_5	AY23			
5	IO_L69N_5/VREF_5	AU23			
5	IO_L69P_5	AV23			
5	IO_L68N_5	AR23			
5	IO_L68P_5	AP23			
5	IO_L67N_5	AM23			
5	IO_L67P_5	AN23			
5	IO_L66N_5/VREF_5	AL23			
5	IO_L66P_5	AL22			
5	IO_L65N_5	AY24			
5	IO_L65P_5	AW24			
5	IO_L64N_5	AU24			
5	IO_L64P_5	AV24			
5	IO_L60N_5	AR24			
5	IO_L60P_5	AT24			
5	IO_L59N_5	AN24			
5	IO_L59P_5	AP24			
5	IO_L58N_5	AL24			
5	IO_L58P_5	AM24			
5	IO_L57N_5/VREF_5	AY26			
5	IO_L57P_5	AY25			
5	IO_L56N_5	AV25			
5	IO_L56P_5	AV26			
5	IO_L55N_5	AR25			
5	IO_L55P_5	AT25			
5	IO_L54N_5	AM25			
5	IO_L54P_5	AN25			
5	IO_L53_5/No_Pair	AW26			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 867/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 867 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
5	IO_L50_5/No_Pair	AW27			
5	IO_L49N_5	AT26			
5	IO_L49P_5	AU26			
5	IO_L48N_5	AP26			
5	IO_L48P_5	AR26			
5	IO_L47N_5	AN26			
5	IO_L47P_5	AM26			
5	IO_L46N_5	AL26			
5	IO_L46P_5	AL25			
5	IO_L45N_5/VREF_5	AU27			
5	IO_L45P_5	AV27			
5	IO_L44N_5	AT27			
5	IO_L44P_5	AR27			
5	IO_L43N_5	AN27			
5	IO_L43P_5	AP27			
5	IO_L39N_5	AL27			
5	IO_L39P_5	AM27			
5	IO_L38N_5	AY28			
5	IO_L38P_5	AY29			
5	IO_L37N_5	AU28			
5	IO_L37P_5	AV28			
5	IO_L87N_5/VREF_5	AP28	NC		
5	IO_L87P_5	AR28	NC		
5	IO_L86N_5	AN28	NC		
5	IO_L86P_5	AM28	NC		
5	IO_L85N_5	AV29	NC		
5	IO_L85P_5	AW29	NC		
5	IO_L84N_5	AT29	NC		
5	IO_L84P_5	AU29	NC		
5	IO_L83_5/No_Pair	AR29	NC		
5	IO_L78N_5	AM29	NC		
5	IO_L78P_5	AN29	NC		
5	IO_L36N_5/VREF_5	AL29			
5	IO_L36P_5	AL28			
5	IO_L35N_5	AY30			
5	IO_L35P_5	AW30			
5	IO_L34N_5	AU30			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 868 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
5	IO_L34P_5	AV30			
5	IO_L30N_5	AR30			
5	IO_L30P_5	AT30			
5	IO_L29N_5	AN30			
5	IO_L29P_5	AP30			
5	IO_L28N_5	AL30			
5	IO_L28P_5	AM30			
5	IO_L27N_5/VREF_5	AV31			
5	IO_L27P_5	AW31			
5	IO_L26N_5	AU31			
5	IO_L26P_5	AT31			
5	IO_L25N_5	AP31			
5	IO_L25P_5	AR31			
5	IO_L21N_5	AM31			
5	IO_L21P_5	AN31			
5	IO_L20N_5	AY32			
5	IO_L20P_5	AY33			
5	IO_L19N_5	AU32			
5	IO_L19P_5	AV32			
5	IO_L09N_5/VREF_5	AP32			
5	IO_L09P_5	AR32			
5	IO_L08N_5	AW33			
5	IO_L08P_5	AV33			
5	IO_L07N_5/VREF_5	AT33			
5	IO_L07P_5	AU33			
5	IO_L06N_5/VRP_5	AP33			
5	IO_L06P_5/VRN_5	AR33			
5	IO_L05_5/No_Pair	AN32			
5	IO_L03N_5/D4	AW34			
5	IO_L03P_5/D5	AY34			
5	IO_L02N_5/D6	AV34			
5	IO_L02P_5/D7	AU34			
5	IO_L01N_5/RDWR_B	AR34			
5	IO_L01P_5/CS_B	AT34			
6	IO_L01P_6/VRN_6	AW37			
6	IO_L01N_6/VRP_6	AV37			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 869/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 869 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
6	IO_L02P_6	AW36			
6	IO_L02N_6	AV36			
6	IO_L03P_6	AY37			
6	IO_L03N_6/VREF_6	AY38			
6	IO_L04P_6	AU36			
6	IO_L04N_6	AT37			
6	IO_L05P_6	AU35			
6	IO_L05N_6	AT35			
6	IO_L06P_6	AW41			
6	IO_L06N_6	AW42			
6	IO_L73P_6	AV41			
6	IO_L73N_6	AV42			
6	IO_L74P_6	AW40			
6	IO_L74N_6	AV40			
6	IO_L75P_6	AU39			
6	IO_L75N_6/VREF_6	AU40			
6	IO_L76P_6	AU41			
6	IO_L76N_6	AU42			
6	IO_L77P_6	AT39			
6	IO_L77N_6	AT40			
6	IO_L78P_6	AT41			
6	IO_L78N_6	AT42			
6	IO_L79P_6	AR38			
6	IO_L79N_6	AR39			
6	IO_L80P_6	AR37			
6	IO_L80N_6	AT38			
6	IO_L81P_6	AR40			
6	IO_L81N_6/VREF_6	AR41			
6	IO_L82P_6	AP36			
6	IO_L82N_6	AP37			
6	IO_L83P_6	AP35			
6	IO_L83N_6	AR36			
6	IO_L84P_6	AP38			
6	IO_L84N_6	AP39			
6	IO_L07P_6	AP41			
6	IO_L07N_6	AP42			
6	IO_L08P_6	AN35			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 870 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
6	IO_L08N_6	AN36			
6	IO_L09P_6	AN37			
6	IO_L09N_6/VREF_6	AN38			
6	IO_L10P_6	AN41			
6	IO_L10N_6	AN42			
6	IO_L11P_6	AM33			
6	IO_L11N_6	AN34			
6	IO_L12P_6	AM36			
6	IO_L12N_6	AM37			
6	IO_L13P_6	AM38			
6	IO_L13N_6	AM39			
6	IO_L14P_6	AM34			
6	IO_L14N_6	AM35			
6	IO_L15P_6	AN40			
6	IO_L15N_6/VREF_6	AM40			
6	IO_L16P_6	AM41			
6	IO_L16N_6	AM42			
6	IO_L17P_6	AL33			
6	IO_L17N_6	AL34			
6	IO_L18P_6	AL35			
6	IO_L18N_6	AL36			
6	IO_L19P_6	AL38			
6	IO_L19N_6	AL39			
6	IO_L20P_6	AL31			
6	IO_L20N_6	AL32			
6	IO_L21P_6	AL40			
6	IO_L21N_6/VREF_6	AL41			
6	IO_L22P_6	AK35			
6	IO_L22N_6	AK36			
6	IO_L23P_6	AK33			
6	IO_L23N_6	AK34			
6	IO_L24P_6	AK37			
6	IO_L24N_6	AK38			
6	IO_L25P_6	AK39			
6	IO_L25N_6	AK40			
6	IO_L26P_6	AK31			
6	IO_L26N_6	AK32			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 871/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 871 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
6	IO_L27P_6	AK41			
6	IO_L27N_6/VREF_6	AK42			
6	IO_L28P_6	AJ35			
6	IO_L28N_6	AJ36			
6	IO_L29P_6	AJ33			
6	IO_L29N_6	AJ34			
6	IO_L30P_6	AJ37			
6	IO_L30N_6	AJ38			
6	IO_L31P_6	AJ41			
6	IO_L31N_6	AJ42			
6	IO_L32P_6	AJ31			
6	IO_L32N_6	AJ32			
6	IO_L33P_6	AH33			
6	IO_L33N_6/VREF_6	AH34			
6	IO_L34P_6	AH37			
6	IO_L34N_6	AH38			
6	IO_L35P_6	AH31			
6	IO_L35N_6	AH32			
6	IO_L36P_6	AJ40			
6	IO_L36N_6	AH40			
6	IO_L37P_6	AH41			
6	IO_L37N_6	AH42			
6	IO_L38P_6	AH35			
6	IO_L38N_6	AG35			
6	IO_L39P_6	AG36			
6	IO_L39N_6/VREF_6	AG37			
6	IO_L40P_6	AG38			
6	IO_L40N_6	AG39			
6	IO_L41P_6	AG32			
6	IO_L41N_6	AG33			
6	IO_L42P_6	AG40			
6	IO_L42N_6	AG41			
6	IO_L43P_6	AF33			
6	IO_L43N_6	AF34			
6	IO_L44P_6	AF35			
6	IO_L44N_6	AF36			
6	IO_L45P_6	AF37			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 872 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
6	IO_L45N_6/VREF_6	AF38			
6	IO_L46P_6	AF39			
6	IO_L46N_6	AF40			
6	IO_L47P_6	AF31			
6	IO_L47N_6	AG31			
6	IO_L48P_6	AF41			
6	IO_L48N_6	AF42			
6	IO_L49P_6	AE35			
6	IO_L49N_6	AE36			
6	IO_L50P_6	AE31			
6	IO_L50N_6	AF32			
6	IO_L51P_6	AE38			
6	IO_L51N_6/VREF_6	AE39			
6	IO_L52P_6	AE41			
6	IO_L52N_6	AE42			
6	IO_L53P_6	AE32			
6	IO_L53N_6	AE33			
6	IO_L54P_6	AD35			
6	IO_L54N_6	AD36			
6	IO_L55P_6	AD37			
6	IO_L55N_6	AD38			
6	IO_L56P_6	AD31			
6	IO_L56N_6	AD32			
6	IO_L57P_6	AD39			
6	IO_L57N_6/VREF_6	AD40			
6	IO_L58P_6	AD41			
6	IO_L58N_6	AD42			
6	IO_L59P_6	AD33			
6	IO_L59N_6	AD34			
6	IO_L60P_6	AC33			
6	IO_L60N_6	AC34			
6	IO_L85P_6	AC36			
6	IO_L85N_6	AC37			
6	IO_L86P_6	AC31			
6	IO_L86N_6	AC32			
6	IO_L87P_6	AC39			
6	IO_L87N_6/VREF_6	AC40			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 873/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 873 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
6	IO_L88P_6	AB33			
6	IO_L88N_6	AB34			
6	IO_L89P_6	AB36			
6	IO_L89N_6	AB37			
6	IO_L90P_6	AB39			
6	IO_L90N_6	AB40			
7	IO_L90P_7	AA39			
7	IO_L90N_7	AA40			
7	IO_L89P_7	AB31			
7	IO_L89N_7	AA31			
7	IO_L88P_7	AA36			
7	IO_L88N_7/VREF_7	AA37			
7	IO_L87P_7	AA33			
7	IO_L87N_7	AA34			
7	IO_L86P_7	Y31			
7	IO_L86N_7	Y32			
7	IO_L85P_7	Y39			
7	IO_L85N_7	Y40			
7	IO_L60P_7	Y36			
7	IO_L60N_7	Y37			
7	IO_L59P_7	Y33			
7	IO_L59N_7	Y34			
7	IO_L58P_7	W41			
7	IO_L58N_7/VREF_7	W42			
7	IO_L57P_7	W39			
7	IO_L57N_7	W40			
7	IO_L56P_7	W31			
7	IO_L56N_7	W32			
7	IO_L55P_7	W37			
7	IO_L55N_7	W38			
7	IO_L54P_7	W35			
7	IO_L54N_7	W36			
7	IO_L53P_7	W33			
7	IO_L53N_7	W34			
7	IO_L52P_7	V41			
7	IO_L52N_7/VREF_7	V42			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 874 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
7	IO_L51P_7	V38			
7	IO_L51N_7	V39			
7	IO_L50P_7	V31			
7	IO_L50N_7	U32			
7	IO_L49P_7	V35			
7	IO_L49N_7	V36			
7	IO_L48P_7	V32			
7	IO_L48N_7	V33			
7	IO_L47P_7	U31			
7	IO_L47N_7	T31			
7	IO_L46P_7	U41			
7	IO_L46N_7/VREF_7	U42			
7	IO_L45P_7	U39			
7	IO_L45N_7	U40			
7	IO_L44P_7	U33			
7	IO_L44N_7	U34			
7	IO_L43P_7	U37			
7	IO_L43N_7	U38			
7	IO_L42P_7	U35			
7	IO_L42N_7	U36			
7	IO_L41P_7	T32			
7	IO_L41N_7	T33			
7	IO_L40P_7	T40			
7	IO_L40N_7/VREF_7	T41			
7	IO_L39P_7	T38			
7	IO_L39N_7	T39			
7	IO_L38P_7	R35			
7	IO_L38N_7	T35			
7	IO_L37P_7	T36			
7	IO_L37N_7	T37			
7	IO_L36P_7	R31			
7	IO_L36N_7	R32			
7	IO_L35P_7	R41			
7	IO_L35N_7	R42			
7	IO_L34P_7	R40			
7	IO_L34N_7/VREF_7	P40			
7	IO_L33P_7	R37			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 875/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 875 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
7	IO_L33N_7	R38			
7	IO_L32P_7	R33			
7	IO_L32N_7	R34			
7	IO_L31P_7	P41			
7	IO_L31N_7	P42			
7	IO_L30P_7	P37			
7	IO_L30N_7	P38			
7	IO_L29P_7	P31			
7	IO_L29N_7	P32			
7	IO_L28P_7	P35			
7	IO_L28N_7/VREF_7	P36			
7	IO_L27P_7	P33			
7	IO_L27N_7	P34			
7	IO_L26P_7	N31			
7	IO_L26N_7	N32			
7	IO_L25P_7	N41			
7	IO_L25N_7	N42			
7	IO_L24P_7	N39			
7	IO_L24N_7	N40			
7	IO_L23P_7	N33			
7	IO_L23N_7	N34			
7	IO_L22P_7	N37			
7	IO_L22N_7/VREF_7	N38			
7	IO_L21P_7	N35			
7	IO_L21N_7	N36			
7	IO_L20P_7	M38			
7	IO_L20N_7	M39			
7	IO_L19P_7	M40			
7	IO_L19N_7	M41			
7	IO_L18P_7	M33			
7	IO_L18N_7	M34			
7	IO_L17P_7	M31			
7	IO_L17N_7	M32			
7	IO_L16P_7	M35			
7	IO_L16N_7/VREF_7	M36			
7	IO_L15P_7	L41			
7	IO_L15N_7	L42			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 876 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
7	IO_L14P_7	L39			
7	IO_L14N_7	L38			
7	IO_L13P_7	L40			
7	IO_L13N_7	K40			
7	IO_L12P_7	L36			
7	IO_L12N_7	L37			
7	IO_L11P_7	L34			
7	IO_L11N_7	L35			
7	IO_L10P_7	K42			
7	IO_L10N_7/VREF_7	K41			
7	IO_L09P_7	K36			
7	IO_L09N_7	K35			
7	IO_L08P_7	K38			
7	IO_L08N_7	K37			
7	IO_L07P_7	L33			
7	IO_L07N_7	K34			
7	IO_L84P_7	J41			
7	IO_L84N_7	J42			
7	IO_L83P_7	J39			
7	IO_L83N_7	J38			
7	IO_L82P_7	J36			
7	IO_L82N_7/VREF_7	J37			
7	IO_L81P_7	J35			
7	IO_L81N_7	H36			
7	IO_L80P_7	H41			
7	IO_L80N_7	H40			
7	IO_L79P_7	H38			
7	IO_L79N_7	H39			
7	IO_L78P_7	H37			
7	IO_L78N_7	G38			
7	IO_L77P_7	G42			
7	IO_L77N_7	G41			
7	IO_L76P_7	G39			
7	IO_L76N_7/VREF_7	G40			
7	IO_L75P_7	F41			
7	IO_L75N_7	F42			
7	IO_L74P_7	F40			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 877/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 877 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
7	IO_L74N_7	F39			
7	IO_L73P_7	E41			
7	IO_L73N_7	E42			
7	IO_L06P_7	D41			
7	IO_L06N_7	D42			
7	IO_L05P_7	E40			
7	IO_L05N_7	D40			
7	IO_L04P_7	F36			
7	IO_L04N_7/VREF_7	G37			
7	IO_L03P_7	D37			
7	IO_L03N_7	E37			
7	IO_L02P_7	D36			
7	IO_L02N_7	E36			
7	IO_L01P_7/VRN_7	C37			
7	IO_L01N_7/VRP_7	C38			
0	VCCO_0	D25			
0	VCCO_0	G23			
0	VCCO_0	G28			
0	VCCO_0	G32			
0	VCCO_0	J25			
0	VCCO_0	J29			
0	VCCO_0	P22			
0	VCCO_0	P23			
0	VCCO_0	P24			
0	VCCO_0	P25			
0	VCCO_0	P26			
0	VCCO_0	R22			
0	VCCO_0	R23			
0	VCCO_0	R24			
0	VCCO_0	R25			
1	VCCO_1	R21			
1	VCCO_1	R20			
1	VCCO_1	R19			
1	VCCO_1	R18			
1	VCCO_1	P21			
1	VCCO_1	P20			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 878 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
1	VCCO_1	P19			
1	VCCO_1	P18			
1	VCCO_1	P17			
1	VCCO_1	J18			
1	VCCO_1	J14			
1	VCCO_1	G20			
1	VCCO_1	G15			
1	VCCO_1	G11			
1	VCCO_1	D18			
2	VCCO_2	AA15			
2	VCCO_2	AA14			
2	VCCO_2	Y15			
2	VCCO_2	Y14			
2	VCCO_2	Y8			
2	VCCO_2	Y5			
2	VCCO_2	W15			
2	VCCO_2	W14			
2	VCCO_2	V15			
2	VCCO_2	V14			
2	VCCO_2	V3			
2	VCCO_2	U15			
2	VCCO_2	U14			
2	VCCO_2	T15			
2	VCCO_2	T14			
2	VCCO_2	R14			
2	VCCO_2	T9			
2	VCCO_2	P4			
2	VCCO_2	M6			
2	VCCO_2	J3			
2	VCCO_2	F5			
3	VCCO_3	AU5			
3	VCCO_3	AP3			
3	VCCO_3	AL6			
3	VCCO_3	AJ4			
3	VCCO_3	AH14			
3	VCCO_3	AG15			
3	VCCO_3	AG14			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 879/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 879 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
3	VCCO_3	AG9			
3	VCCO_3	AF15			
3	VCCO_3	AF14			
3	VCCO_3	AE15			
3	VCCO_3	AE14			
3	VCCO_3	AE3			
3	VCCO_3	AD15			
3	VCCO_3	AD14			
3	VCCO_3	AC15			
3	VCCO_3	AC14			
3	VCCO_3	AC8			
3	VCCO_3	AC5			
3	VCCO_3	AB15			
3	VCCO_3	AB14			
4	VCCO_4	AW18			
4	VCCO_4	AT20			
4	VCCO_4	AT15			
4	VCCO_4	AT11			
4	VCCO_4	AP18			
4	VCCO_4	AP14			
4	VCCO_4	AJ21			
4	VCCO_4	AJ20			
4	VCCO_4	AJ19			
4	VCCO_4	AJ18			
4	VCCO_4	AJ17			
4	VCCO_4	AH21			
4	VCCO_4	AH20			
4	VCCO_4	AH19			
4	VCCO_4	AH18			
5	VCCO_5	AW25			
5	VCCO_5	AT32			
5	VCCO_5	AT28			
5	VCCO_5	AT23			
5	VCCO_5	AP29			
5	VCCO_5	AP25			
5	VCCO_5	AJ26			
5	VCCO_5	AJ25			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 880 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
5	VCCO_5	AJ24			
5	VCCO_5	AJ23			
5	VCCO_5	AJ22			
5	VCCO_5	AH25			
5	VCCO_5	AH24			
5	VCCO_5	AH23			
5	VCCO_5	AH22			
6	VCCO_6	AU38			
6	VCCO_6	AP40			
6	VCCO_6	AL37			
6	VCCO_6	AJ39			
6	VCCO_6	AH29			
6	VCCO_6	AG34			
6	VCCO_6	AG29			
6	VCCO_6	AG28			
6	VCCO_6	AF29			
6	VCCO_6	AF28			
6	VCCO_6	AE40			
6	VCCO_6	AE29			
6	VCCO_6	AE28			
6	VCCO_6	AD29			
6	VCCO_6	AD28			
6	VCCO_6	AC38			
6	VCCO_6	AC35			
6	VCCO_6	AC29			
6	VCCO_6	AC28			
6	VCCO_6	AB29			
6	VCCO_6	AB28			
7	VCCO_7	AA29			
7	VCCO_7	AA28			
7	VCCO_7	Y38			
7	VCCO_7	Y35			
7	VCCO_7	Y29			
7	VCCO_7	Y28			
7	VCCO_7	W29			
7	VCCO_7	W28			
7	VCCO_7	V40			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 881/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 881 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
7	VCCO_7	V29			
7	VCCO_7	V28			
7	VCCO_7	U29			
7	VCCO_7	U28			
7	VCCO_7	T34			
7	VCCO_7	T29			
7	VCCO_7	T28			
7	VCCO_7	R29			
7	VCCO_7	P39			
7	VCCO_7	M37			
7	VCCO_7	J40			
7	VCCO_7	F38			
N/A	CCLK	AY7			
N/A	PROG_B	G35			
N/A	DONE	AW8			
N/A	M0	AV35			
N/A	M1	AY36			
N/A	M2	AW35			
N/A	TCK	G8			
N/A	TDI	C36			
N/A	TDO	C7			
N/A	TMS	F8			
N/A	PWRDWN_B	AV8			
N/A	HSWAP_EN	F35			
N/A	RSVD	D8			
N/A	VBATT	E8			
N/A	DXP	E35			
N/A	DXN	D35			
N/A	AVCCAUXTX2	B40			
N/A	VTTXPAD2	B41			
N/A	TXNPAD2	A41			
N/A	TXPPAD2	A40			
N/A	GNDA2	C39			
N/A	RXPPAD2	A39			
N/A	RXNPAD2	A38			
N/A	VTRXPAD2	B39			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 882 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	AVCCAUXRX2	B38			
N/A	AVCCAUXTX3	B36			
N/A	VTTXPAD3	B37			
N/A	TXNPAD3	A37			
N/A	TXPPAD3	A36			
N/A	GNDA3	C35			
N/A	RXPPAD3	A35			
N/A	RXNPAD3	A34			
N/A	VTRXPAD3	B35			
N/A	AVCCAUXRX3	B34			
N/A	AVCCAUXTX4	B32			
N/A	VTTXPAD4	B33			
N/A	TXNPAD4	A33			
N/A	TXPPAD4	A32			
N/A	GNDA4	C31			
N/A	RXPPAD4	A31			
N/A	RXNPAD4	A30			
N/A	VTRXPAD4	B31			
N/A	AVCCAUXRX4	B30			
N/A	AVCCAUXTX5	B28			
N/A	VTTXPAD5	B29			
N/A	TXNPAD5	A29			
N/A	TXPPAD5	A28			
N/A	GNDA5	C27			
N/A	RXPPAD5	A27			
N/A	RXNPAD5	A26			
N/A	VTRXPAD5	B27			
N/A	AVCCAUXRX5	B26			
N/A	AVCCAUXTX6	B24			
N/A	VTTXPAD6	B25			
N/A	TXNPAD6	A25			
N/A	TXPPAD6	A24			
N/A	GNDA6	C22			
N/A	RXPPAD6	A23			
N/A	RXNPAD6	A22			
N/A	VTRXPAD6	B23			
N/A	AVCCAUXRX6	B22			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 883/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 883 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	AVCCAUXTX7	B20			
N/A	VTTXPAD7	B21			
N/A	TXNPAD7	A21			
N/A	TXPPAD7	A20			
N/A	GNDA7	C21			
N/A	RXPPAD7	A19			
N/A	RXNPAD7	A18			
N/A	VTRXPAD7	B19			
N/A	AVCCAUXRX7	B18			
N/A	AVCCAUXTX8	B16			
N/A	VTTXPAD8	B17			
N/A	TXNPAD8	A17			
N/A	TXPPAD8	A16			
N/A	GNDA8	C16			
N/A	RXPPAD8	A15			
N/A	RXNPAD8	A14			
N/A	VTRXPAD8	B15			
N/A	AVCCAUXRX8	B14			
N/A	AVCCAUXTX9	B12			
N/A	VTTXPAD9	B13			
N/A	TXNPAD9	A13			
N/A	TXPPAD9	A12			
N/A	GNDA9	C12			
N/A	RXPPAD9	A11			
N/A	RXNPAD9	A10			
N/A	VTRXPAD9	B11			
N/A	AVCCAUXRX9	B10			
N/A	AVCCAUXTX10	B8			
N/A	VTTXPAD10	B9			
N/A	TXNPAD10	A9			
N/A	TXPPAD10	A8			
N/A	GNDA10	C8			
N/A	RXPPAD10	A7			
N/A	RXNPAD10	A6			
N/A	VTRXPAD10	B7			
N/A	AVCCAUXRX10	B6			
N/A	AVCCAUXTX11	B4			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 884 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	VTTXPAD11	B5			
N/A	TXNPAD11	A5			
N/A	TXPPAD11	A4			
N/A	GNDA11	C4			
N/A	RXPPAD11	A3			
N/A	RXNPAD11	A2			
N/A	VTRXPAD11	B3			
N/A	AVCCAUXRX11	B2			
N/A	AVCCAUXRX14	BA2			
N/A	VTRXPAD14	BA3			
N/A	RXNPAD14	BB2			
N/A	RXPPAD14	BB3			
N/A	GNDA14	AY4			
N/A	TXPPAD14	BB4			
N/A	TXNPAD14	BB5			
N/A	VTTXPAD14	BA5			
N/A	AVCCAUXTX14	BA4			
N/A	AVCCAUXRX15	BA6			
N/A	VTRXPAD15	BA7			
N/A	RXNPAD15	BB6			
N/A	RXPPAD15	BB7			
N/A	GNDA15	AY8			
N/A	TXPPAD15	BB8			
N/A	TXNPAD15	BB9			
N/A	VTTXPAD15	BA9			
N/A	AVCCAUXTX15	BA8			
N/A	AVCCAUXRX16	BA10			
N/A	VTRXPAD16	BA11			
N/A	RXNPAD16	BB10			
N/A	RXPPAD16	BB11			
N/A	GNDA16	AY12			
N/A	TXPPAD16	BB12			
N/A	TXNPAD16	BB13			
N/A	VTTXPAD16	BA13			
N/A	AVCCAUXTX16	BA12			
N/A	AVCCAUXRX17	BA14			
N/A	VTRXPAD17	BA15			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 885/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 885 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	RXNPAD17	BB14			
N/A	RXPPAD17	BB15			
N/A	GNDA17	AY16			
N/A	TXPPAD17	BB16			
N/A	TXNPAD17	BB17			
N/A	VTTXPAD17	BA17			
N/A	AVCCAUXTX17	BA16			
N/A	AVCCAUXRX18	BA18			
N/A	VTRXPAD18	BA19			
N/A	RXNPAD18	BB18			
N/A	RXPPAD18	BB19			
N/A	GNDA18	AY21			
N/A	TXPPAD18	BB20			
N/A	TXNPAD18	BB21			
N/A	VTTXPAD18	BA21			
N/A	AVCCAUXTX18	BA20			
N/A	AVCCAUXRX19	BA22			
N/A	VTRXPAD19	BA23			
N/A	RXNPAD19	BB22			
N/A	RXPPAD19	BB23			
N/A	GNDA19	AY22			
N/A	TXPPAD19	BB24			
N/A	TXNPAD19	BB25			
N/A	VTTXPAD19	BA25			
N/A	AVCCAUXTX19	BA24			
N/A	AVCCAUXRX20	BA26			
N/A	VTRXPAD20	BA27			
N/A	RXNPAD20	BB26			
N/A	RXPPAD20	BB27			
N/A	GNDA20	AY27			
N/A	TXPPAD20	BB28			
N/A	TXNPAD20	BB29			
N/A	VTTXPAD20	BA29			
N/A	AVCCAUXTX20	BA28			
N/A	AVCCAUXRX21	BA30			
N/A	VTRXPAD21	BA31			
N/A	RXNPAD21	BB30			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 886 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	RXPPAD21	BB31			
N/A	GNDA21	AY31			
N/A	TXPPAD21	BB32			
N/A	TXNPAD21	BB33			
N/A	VTTXPAD21	BA33			
N/A	AVCCAUXTX21	BA32			
N/A	AVCCAUXRX22	BA34			
N/A	VTRXPAD22	BA35			
N/A	RXNPAD22	BB34			
N/A	RXPPAD22	BB35			
N/A	GNDA22	AY35			
N/A	TXPPAD22	BB36			
N/A	TXNPAD22	BB37			
N/A	VTTXPAD22	BA37			
N/A	AVCCAUXTX22	BA36			
N/A	AVCCAUXRX23	BA38			
N/A	VTRXPAD23	BA39			
N/A	RXNPAD23	BB38			
N/A	RXPPAD23	BB39			
N/A	GNDA23	AY39			
N/A	TXPPAD23	BB40			
N/A	TXNPAD23	BB41			
N/A	VTTXPAD23	BA41			
N/A	AVCCAUXTX23	BA40			
N/A	VCCINT	AB27			
N/A	VCCINT	AB16			
N/A	VCCINT	AC27			
N/A	VCCINT	AC16			
N/A	VCCINT	AD27			
N/A	VCCINT	AD16			
N/A	VCCINT	AE27			
N/A	VCCINT	AE16			
N/A	VCCINT	AF27			
N/A	VCCINT	AF26			
N/A	VCCINT	AF17			
N/A	VCCINT	AF16			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 887/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 887 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	VCCINT	AG27			
N/A	VCCINT	AG26			
N/A	VCCINT	AG25			
N/A	VCCINT	AG24			
N/A	VCCINT	AG23			
N/A	VCCINT	AG22			
N/A	VCCINT	AG21			
N/A	VCCINT	AG20			
N/A	VCCINT	AG19			
N/A	VCCINT	AG18			
N/A	VCCINT	AG17			
N/A	VCCINT	AG16			
N/A	VCCINT	AH28			
N/A	VCCINT	AH27			
N/A	VCCINT	AH26			
N/A	VCCINT	AH17			
N/A	VCCINT	AH16			
N/A	VCCINT	AH15			
N/A	VCCINT	AJ29			
N/A	VCCINT	AJ28			
N/A	VCCINT	AJ27			
N/A	VCCINT	AJ16			
N/A	VCCINT	AJ15			
N/A	VCCINT	AJ14			
N/A	VCCINT	AK30			
N/A	VCCINT	AK13			
N/A	VCCINT	AA27			
N/A	VCCINT	AA16			
N/A	VCCINT	Y27			
N/A	VCCINT	Y16			
N/A	VCCINT	W27			
N/A	VCCINT	W16			
N/A	VCCINT	V27			
N/A	VCCINT	V16			
N/A	VCCINT	U27			
N/A	VCCINT	U26			
N/A	VCCINT	U17			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 888 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	VCCINT	U16			
N/A	VCCINT	T27			
N/A	VCCINT	T26			
N/A	VCCINT	T25			
N/A	VCCINT	T24			
N/A	VCCINT	T23			
N/A	VCCINT	T22			
N/A	VCCINT	T21			
N/A	VCCINT	T20			
N/A	VCCINT	T19			
N/A	VCCINT	T18			
N/A	VCCINT	T17			
N/A	VCCINT	T16			
N/A	VCCINT	R28			
N/A	VCCINT	R27			
N/A	VCCINT	R26			
N/A	VCCINT	R17			
N/A	VCCINT	R16			
N/A	VCCINT	R15			
N/A	VCCINT	P29			
N/A	VCCINT	P28			
N/A	VCCINT	P27			
N/A	VCCINT	P16			
N/A	VCCINT	P15			
N/A	VCCINT	P14			
N/A	VCCINT	N30			
N/A	VCCINT	N13			
N/A	VCCAUX	AB42			
N/A	VCCAUX	AB41			
N/A	VCCAUX	AB2			
N/A	VCCAUX	AB1			
N/A	VCCAUX	AC42			
N/A	VCCAUX	AC1			
N/A	VCCAUX	AM32			
N/A	VCCAUX	AM11			
N/A	VCCAUX	AN33			
N/A	VCCAUX	AN10			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 889/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 889 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	VCCAUX	AV39			
N/A	VCCAUX	AV4			
N/A	VCCAUX	AW38			
N/A	VCCAUX	AW22			
N/A	VCCAUX	AW21			
N/A	VCCAUX	AW5			
N/A	VCCAUX	AA42			
N/A	VCCAUX	AA41			
N/A	VCCAUX	AA2			
N/A	VCCAUX	AA1			
N/A	VCCAUX	Y42			
N/A	VCCAUX	Y1			
N/A	VCCAUX	L32			
N/A	VCCAUX	L11			
N/A	VCCAUX	K33			
N/A	VCCAUX	K10			
N/A	VCCAUX	E39			
N/A	VCCAUX	E4			
N/A	VCCAUX	D38			
N/A	VCCAUX	D22			
N/A	VCCAUX	D21			
N/A	VCCAUX	D5			
N/A	GND	AB38			
N/A	GND	AB35			
N/A	GND	AB32			
N/A	GND	AB26			
N/A	GND	AB25			
N/A	GND	AB24			
N/A	GND	AB23			
N/A	GND	AB22			
N/A	GND	AB21			
N/A	GND	AB20			
N/A	GND	AB19			
N/A	GND	AB18			
N/A	GND	AB17			
N/A	GND	AB11			
N/A	GND	AB8			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 890 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	AB5			
N/A	GND	AC41			
N/A	GND	AC26			
N/A	GND	AC25			
N/A	GND	AC24			
N/A	GND	AC23			
N/A	GND	AC22			
N/A	GND	AC21			
N/A	GND	AC20			
N/A	GND	AC19			
N/A	GND	AC18			
N/A	GND	AC17			
N/A	GND	AC2			
N/A	GND	AD26			
N/A	GND	AD25			
N/A	GND	AD24			
N/A	GND	AD23			
N/A	GND	AD22			
N/A	GND	AD21			
N/A	GND	AD20			
N/A	GND	AD19			
N/A	GND	AD18			
N/A	GND	AD17			
N/A	GND	AE37			
N/A	GND	AE34			
N/A	GND	AE26			
N/A	GND	AE25			
N/A	GND	AE24			
N/A	GND	AE23			
N/A	GND	AE22			
N/A	GND	AE21			
N/A	GND	AE20			
N/A	GND	AE19			
N/A	GND	AE18			
N/A	GND	AE17			
N/A	GND	AE9			
N/A	GND	AE6			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 891/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 891 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	AF25			
N/A	GND	AF24			
N/A	GND	AF23			
N/A	GND	AF22			
N/A	GND	AF21			
N/A	GND	AF20			
N/A	GND	AF19			
N/A	GND	AF18			
N/A	GND	AG42			
N/A	GND	AG1			
N/A	GND	AH39			
N/A	GND	AH36			
N/A	GND	AH7			
N/A	GND	AH4			
N/A	GND	AL42			
N/A	GND	AL1			
N/A	GND	AM22			
N/A	GND	AM21			
N/A	GND	AN39			
N/A	GND	AN4			
N/A	GND	AP34			
N/A	GND	AP9			
N/A	GND	AR42			
N/A	GND	AR35			
N/A	GND	AR22			
N/A	GND	AR21			
N/A	GND	AR8			
N/A	GND	AR1			
N/A	GND	AT36			
N/A	GND	AT7			
N/A	GND	AU37			
N/A	GND	AU25			
N/A	GND	AU18			
N/A	GND	AU6			
N/A	GND	AV38			
N/A	GND	AV22			
N/A	GND	AV21			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 892 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	AV5			
N/A	GND	AW39			
N/A	GND	AW32			
N/A	GND	AW28			
N/A	GND	AW15			
N/A	GND	AW11			
N/A	GND	AW4			
N/A	GND	AY42			
N/A	GND	AY41			
N/A	GND	AY40			
N/A	GND	AY3			
N/A	GND	AY2			
N/A	GND	AY1			
N/A	GND	BA42			
N/A	GND	BA1			
N/A	GND	AA38			
N/A	GND	AA35			
N/A	GND	AA32			
N/A	GND	AA26			
N/A	GND	AA25			
N/A	GND	AA24			
N/A	GND	AA23			
N/A	GND	AA22			
N/A	GND	AA21			
N/A	GND	AA20			
N/A	GND	AA19			
N/A	GND	AA18			
N/A	GND	AA17			
N/A	GND	AA11			
N/A	GND	AA8			
N/A	GND	AA5			
N/A	GND	Y41			
N/A	GND	Y26			
N/A	GND	Y25			
N/A	GND	Y24			
N/A	GND	Y23			
N/A	GND	Y22			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 893/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 893 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	Y21			
N/A	GND	Y20			
N/A	GND	Y19			
N/A	GND	Y18			
N/A	GND	Y17			
N/A	GND	Y2			
N/A	GND	W26			
N/A	GND	W25			
N/A	GND	W24			
N/A	GND	W23			
N/A	GND	W22			
N/A	GND	W21			
N/A	GND	W20			
N/A	GND	W19			
N/A	GND	W18			
N/A	GND	W17			
N/A	GND	V37			
N/A	GND	V34			
N/A	GND	V26			
N/A	GND	V25			
N/A	GND	V24			
N/A	GND	V23			
N/A	GND	V22			
N/A	GND	V21			
N/A	GND	V20			
N/A	GND	V19			
N/A	GND	V18			
N/A	GND	V17			
N/A	GND	V9			
N/A	GND	V6			
N/A	GND	U25			
N/A	GND	U24			
N/A	GND	U23			
N/A	GND	U22			
N/A	GND	U21			
N/A	GND	U20			
N/A	GND	U19			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 894 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**

Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	U18			
N/A	GND	T42			
N/A	GND	T1			
N/A	GND	R39			
N/A	GND	R36			
N/A	GND	R7			
N/A	GND	R4			
N/A	GND	M42			
N/A	GND	M1			
N/A	GND	L22			
N/A	GND	L21			
N/A	GND	K39			
N/A	GND	K4			
N/A	GND	J34			
N/A	GND	J9			
N/A	GND	H42			
N/A	GND	H35			
N/A	GND	H22			
N/A	GND	H21			
N/A	GND	H8			
N/A	GND	H1			
N/A	GND	G36			
N/A	GND	G7			
N/A	GND	F37			
N/A	GND	F25			
N/A	GND	F18			
N/A	GND	F6			
N/A	GND	E38			
N/A	GND	E22			
N/A	GND	E21			
N/A	GND	E5			
N/A	GND	D39			
N/A	GND	D32			
N/A	GND	D28			
N/A	GND	D15			
N/A	GND	D11			
N/A	GND	D4			

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 895 of 947

Table 13: **FF1704 — XC2VP70, XC2VP100, and XC2VP125**


Bank	Pin Description	Pin Number	No Connects		
			XC2VP70	XC2VP100	XC2VP125
N/A	GND	C42			
N/A	GND	C41			
N/A	GND	C40			
N/A	GND	C3			
N/A	GND	C2			
N/A	GND	C1			
N/A	GND	B42			
N/A	GND	B1			
N/A	GND	N14			
N/A	GND	N29			
N/A	GND	AK14			
N/A	GND	AK29			
N/A	GND	P13			
N/A	GND	P30			
N/A	GND	AJ13			
N/A	GND	AJ30			

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 896 of 947

FF1704 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

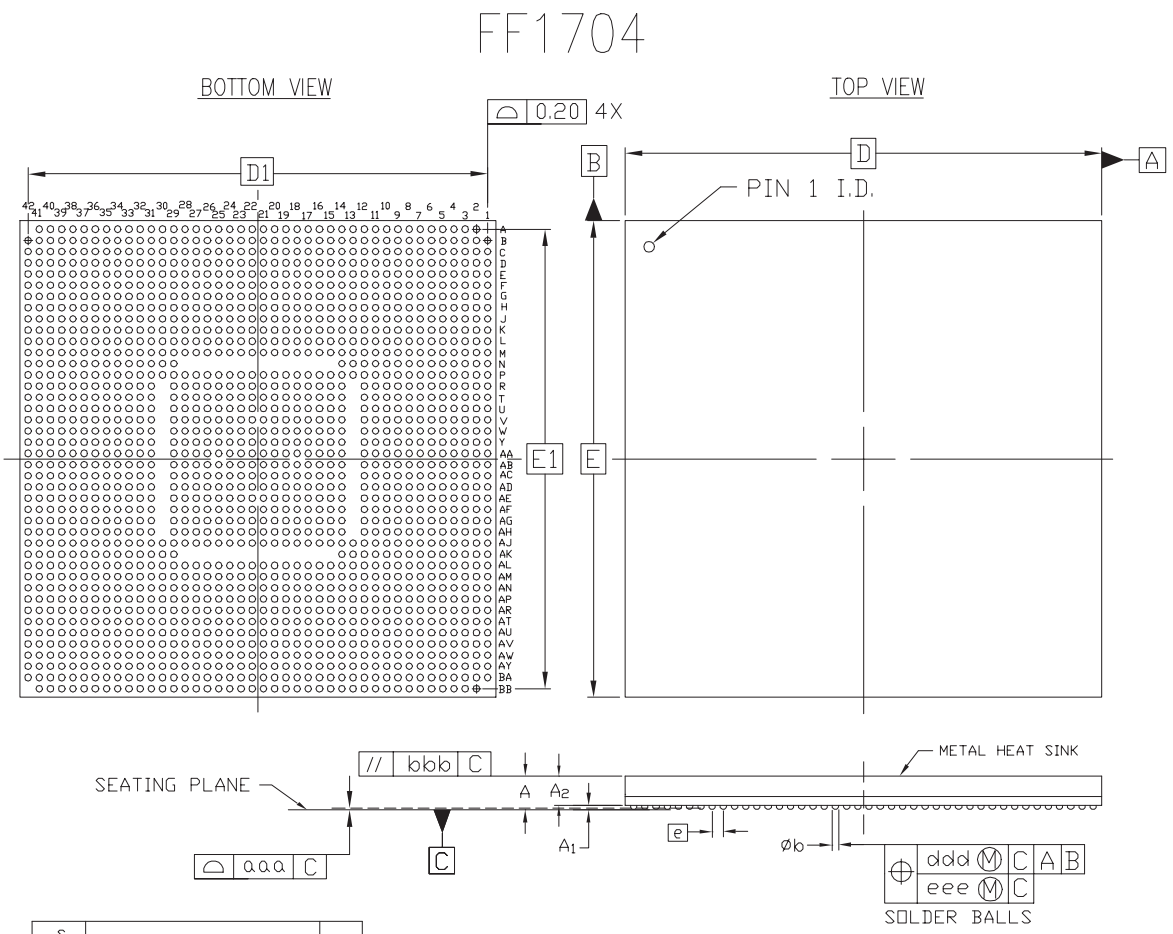

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.45	
A_1	0.40	0.50	0.60	
A_2			2.85	
D/E	42.50 BASIC			
D_1/E_1	41.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
bbb			0.25	
ddd			0.25	
eee			0.10	
M		42		2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M–1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAV–1 (DEPOPULATED)

Figure 9: **FF1704 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 897/9

FF1696 Flip-Chip Fine-Pitch BGA Package

As shown in Table 14, XC2VP100 and XC2VP125 Virtex-II Pro devices are available in the FF1696 flip-chip fine-pitch BGA package. Following this table are the FF1696 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch).

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
0	IO_L01N_0/VRP_0	E33		
0	IO_L01P_0/VRN_0	F33		
0	IO_L02N_0	K32		
0	IO_L02P_0	L32		
0	IO_L03N_0	C32		
0	IO_L03P_0/VREF_0	C33		
0	IO_L05_0/No_Pair	G33		
0	IO_L06N_0	A33		
0	IO_L06P_0	B33		
0	IO_L07N_0	F32		
0	IO_L07P_0	G32		
0	IO_L08N_0	H32		
0	IO_L08P_0	J32		
0	IO_L09N_0	D32		
0	IO_L09P_0/VREF_0	E32		
0	IO_L19N_0	A32		
0	IO_L19P_0	B32		
0	IO_L20N_0	K31		
0	IO_L20P_0	L31		
0	IO_L21N_0	H30		
0	IO_L21P_0	G31		
0	IO_L25N_0	E31		
0	IO_L25P_0	F31		
0	IO_L26N_0	H31		
0	IO_L26P_0	J31		
0	IO_L27N_0	D30		
0	IO_L27P_0/VREF_0	D31		
0	IO_L28N_0	B31		
0	IO_L28P_0	C31		
0	IO_L29N_0	K30		
0	IO_L29P_0	L30		
0	IO_L30N_0	F30		
0	IO_L30P_0	G30		
0	IO_L34N_0	B30		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 898 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
0	IO_L34P_0	C30		
0	IO_L35N_0	L29		
0	IO_L35P_0	M29		
0	IO_L36N_0	H28		
0	IO_L36P_0/VREF_0	G29		
0	IO_L76N_0	E29		
0	IO_L76P_0	F29		
0	IO_L77N_0	J29		
0	IO_L77P_0	K29		
0	IO_L78N_0	D28		
0	IO_L78P_0	C29		
0	IO_L79N_0	A29		
0	IO_L79P_0	B29		
0	IO_L80_0/No_Pair	L28		
0	IO_L83_0/No_Pair	M28		
0	IO_L84N_0	G27		
0	IO_L84P_0	G28		
0	IO_L85N_0	E28		
0	IO_L85P_0	F28		
0	IO_L86N_0	J28		
0	IO_L86P_0	K28		
0	IO_L87N_0	C27		
0	IO_L87P_0/VREF_0	C28		
0	IO_L37N_0	A28		
0	IO_L37P_0	B28		
0	IO_L38N_0	L27		
0	IO_L38P_0	M27		
0	IO_L39N_0	H26		
0	IO_L39P_0	H27		
0	IO_L43N_0	E27		
0	IO_L43P_0	F27		
0	IO_L44N_0	J27		
0	IO_L44P_0	K27		
0	IO_L45N_0	D26		
0	IO_L45P_0/VREF_0	D27		
0	IO_L10N_0	A27	NC	
0	IO_L10P_0	B27	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 899 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
0	IO_L11N_0	M25	NC	
0	IO_L11P_0	M26	NC	
0	IO_L12N_0	F26	NC	
0	IO_L12P_0	G26	NC	
0	IO_L18N_0	B26	NC	
0	IO_L18P_0/VREF_0	C26	NC	
0	IO_L46N_0	G24		
0	IO_L46P_0	G25		
0	IO_L47N_0	K26		
0	IO_L47P_0	L26		
0	IO_L48N_0	E25		
0	IO_L48P_0	F25		
0	IO_L49N_0	C24		
0	IO_L49P_0	C25		
0	IO_L50_0/No_Pair	L24		
0	IO_L53_0/No_Pair	L25		
0	IO_L54N_0	A25		
0	IO_L54P_0	B25		
0	IO_L55N_0	H23		
0	IO_L55P_0	H24		
0	IO_L56N_0	J25		
0	IO_L56P_0	K25		
0	IO_L57N_0	E24		
0	IO_L57P_0/VREF_0	F24		
0	IO_L58N_0	D23		
0	IO_L58P_0	D24		
0	IO_L59N_0	J24		
0	IO_L59P_0	K24		
0	IO_L60N_0	A24		
0	IO_L60P_0	B24		
0	IO_L64N_0	F23		
0	IO_L64P_0	G23		
0	IO_L65N_0	M22		
0	IO_L65P_0	M23		
0	IO_L66N_0	B23		
0	IO_L66P_0/VREF_0	C23		
0	IO_L67N_0	H22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 900 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
0	IO_L67P_0	J22		
0	IO_L68N_0	K23		
0	IO_L68P_0	L23		
0	IO_L69N_0	F22		
0	IO_L69P_0/VREF_0	G22		
0	IO_L73N_0	D22		
0	IO_L73P_0	E22		
0	IO_L74N_0/GCLK7P	K22		
0	IO_L74P_0/GCLK6S	L22		
0	IO_L75N_0/GCLK5P	B22		
0	IO_L75P_0/GCLK4S	C22		
1	IO_L75N_1/GCLK3P	C21		
1	IO_L75P_1/GCLK2S	B21		
1	IO_L74N_1/GCLK1P	L21		
1	IO_L74P_1/GCLK0S	K21		
1	IO_L73N_1	E21		
1	IO_L73P_1	D21		
1	IO_L69N_1/VREF_1	G21		
1	IO_L69P_1	F21		
1	IO_L68N_1	L20		
1	IO_L68P_1	K20		
1	IO_L67N_1	J21		
1	IO_L67P_1	H21		
1	IO_L66N_1/VREF_1	C20		
1	IO_L66P_1	B20		
1	IO_L65N_1	M20		
1	IO_L65P_1	M21		
1	IO_L64N_1	G20		
1	IO_L64P_1	F20		
1	IO_L60N_1	B19		
1	IO_L60P_1	A19		
1	IO_L59N_1	K19		
1	IO_L59P_1	J19		
1	IO_L58N_1	D19		
1	IO_L58P_1	D20		
1	IO_L57N_1/VREF_1	F19		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 901/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 901 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
1	IO_L57P_1	E19		
1	IO_L56N_1	K18		
1	IO_L56P_1	J18		
1	IO_L55N_1	H19		
1	IO_L55P_1	H20		
1	IO_L54N_1	B18		
1	IO_L54P_1	A18		
1	IO_L53_1/No_Pair	L18		
1	IO_L50_1/No_Pair	L19		
1	IO_L49N_1	C18		
1	IO_L49P_1	C19		
1	IO_L48N_1	F18		
1	IO_L48P_1	E18		
1	IO_L47N_1	L17		
1	IO_L47P_1	K17		
1	IO_L46N_1	G18		
1	IO_L46P_1	G19		
1	IO_L18N_1/VREF_1	C17	NC	
1	IO_L18P_1	B17	NC	
1	IO_L12N_1	G17	NC	
1	IO_L12P_1	F17	NC	
1	IO_L11N_1	M17	NC	
1	IO_L11P_1	M18	NC	
1	IO_L10N_1	B16	NC	
1	IO_L10P_1	A16	NC	
1	IO_L45N_1/VREF_1	D16		
1	IO_L45P_1	D17		
1	IO_L44N_1	K16		
1	IO_L44P_1	J16		
1	IO_L43N_1	F16		
1	IO_L43P_1	E16		
1	IO_L39N_1	H16		
1	IO_L39P_1	H17		
1	IO_L38N_1	M16		
1	IO_L38P_1	L16		
1	IO_L37N_1	B15		
1	IO_L37P_1	A15		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 902 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
1	IO_L87N_1/VREF_1	C15		
1	IO_L87P_1	C16		
1	IO_L86N_1	K15		
1	IO_L86P_1	J15		
1	IO_L85N_1	F15		
1	IO_L85P_1	E15		
1	IO_L84N_1	G15		
1	IO_L84P_1	G16		
1	IO_L83_1/No_Pair	M15		
1	IO_L80_1/No_Pair	L15		
1	IO_L79N_1	B14		
1	IO_L79P_1	A14		
1	IO_L78N_1	C14		
1	IO_L78P_1	D15		
1	IO_L77N_1	K14		
1	IO_L77P_1	J14		
1	IO_L76N_1	F14		
1	IO_L76P_1	E14		
1	IO_L36N_1/VREF_1	G14		
1	IO_L36P_1	H15		
1	IO_L35N_1	M14		
1	IO_L35P_1	L14		
1	IO_L34N_1	C13		
1	IO_L34P_1	B13		
1	IO_L30N_1	G13		
1	IO_L30P_1	F13		
1	IO_L29N_1	L13		
1	IO_L29P_1	K13		
1	IO_L28N_1	C12		
1	IO_L28P_1	B12		
1	IO_L27N_1/VREF_1	D12		
1	IO_L27P_1	D13		
1	IO_L26N_1	J12		
1	IO_L26P_1	H12		
1	IO_L25N_1	F12		
1	IO_L25P_1	E12		
1	IO_L21N_1	G12		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 903 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
1	IO_L21P_1	H13		
1	IO_L20N_1	L12		
1	IO_L20P_1	K12		
1	IO_L19N_1	B11		
1	IO_L19P_1	A11		
1	IO_L09N_1/VREF_1	E11		
1	IO_L09P_1	D11		
1	IO_L08N_1	J11		
1	IO_L08P_1	H11		
1	IO_L07N_1	G11		
1	IO_L07P_1	F11		
1	IO_L06N_1	B10		
1	IO_L06P_1	A10		
1	IO_L05_1/No_Pair	G10		
1	IO_L03N_1/VREF_1	C10		
1	IO_L03P_1	C11		
1	IO_L02N_1	L11		
1	IO_L02P_1	K11		
1	IO_L01N_1/VRP_1	F10		
1	IO_L01P_1/VRN_1	E10		
2	IO_L01N_2/VRP_2	B8		
2	IO_L01P_2/VRN_2	A8		
2	IO_L02N_2	C9		
2	IO_L02P_2	B9		
2	IO_L03N_2	B7		
2	IO_L03P_2	A7		
2	IO_L04N_2/VREF_2	B6		
2	IO_L04P_2	A6		
2	IO_L05N_2	D8		
2	IO_L05P_2	D9		
2	IO_L06N_2	B4		
2	IO_L06P_2	A4		
2	IO_L73N_2	C7		
2	IO_L73P_2	C8		
2	IO_L74N_2	G9		
2	IO_L74P_2	F9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 904 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	IO_L75N_2	C5		
2	IO_L75P_2	B5		
2	IO_L76N_2/VREF_2	D7		
2	IO_L76P_2	C6		
2	IO_L77N_2	H8		
2	IO_L77P_2	H9		
2	IO_L78N_2	C3		
2	IO_L78P_2	C4		
2	IO_L79N_2	D1		
2	IO_L79P_2	D2		
2	IO_L80N_2	J8		
2	IO_L80P_2	K9		
2	IO_L81N_2	E6		
2	IO_L81P_2	D5		
2	IO_L82N_2/VREF_2	E4		
2	IO_L82P_2	D4		
2	IO_L83N_2	L8		
2	IO_L83P_2	L9		
2	IO_L84N_2	E3		
2	IO_L84P_2	D3		
2	IO_L61N_2	F8		
2	IO_L61P_2	E8		
2	IO_L62N_2	M8		
2	IO_L62P_2	M9		
2	IO_L63N_2	F7		
2	IO_L63P_2	E7		
2	IO_L64N_2/VREF_2	F3		
2	IO_L64P_2	E2		
2	IO_L65N_2	N12		
2	IO_L65P_2	P12		
2	IO_L66N_2	F1		
2	IO_L66P_2	F2		
2	IO_L67N_2	G7		
2	IO_L67P_2	G8		
2	IO_L68N_2	N10		
2	IO_L68P_2	N11		
2	IO_L69N_2	G6		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 905/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 905 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	IO_L69P_2	F6		
2	IO_L70N_2/VREF_2	G5		
2	IO_L70P_2	F5		
2	IO_L71N_2	P10		
2	IO_L71P_2	P11		
2	IO_L72N_2	G3		
2	IO_L72P_2	G4		
2	IO_L07N_2	G1		
2	IO_L07P_2	G2		
2	IO_L08N_2	N8		
2	IO_L08P_2	P9		
2	IO_L09N_2	H6		
2	IO_L09P_2	H7		
2	IO_L10N_2/VREF_2	H4		
2	IO_L10P_2	H5		
2	IO_L11N_2	R12		
2	IO_L11P_2	T12		
2	IO_L12N_2	H2		
2	IO_L12P_2	H3		
2	IO_L13N_2	J6		
2	IO_L13P_2	J7		
2	IO_L14N_2	R10		
2	IO_L14P_2	R11		
2	IO_L15N_2	J3		
2	IO_L15P_2	J4		
2	IO_L16N_2/VREF_2	J2		
2	IO_L16P_2	H1		
2	IO_L17N_2	R8		
2	IO_L17P_2	R9		
2	IO_L18N_2	K5		
2	IO_L18P_2	K6		
2	IO_L19N_2	K1		
2	IO_L19P_2	K2		
2	IO_L20N_2	T10		
2	IO_L20P_2	T11		
2	IO_L21N_2	L7		
2	IO_L21P_2	K7		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 906 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	IO_L22N_2/VREF_2	L4		
2	IO_L22P_2	L5		
2	IO_L23N_2	T8		
2	IO_L23P_2	T9		
2	IO_L24N_2	L3		
2	IO_L24P_2	K3		
2	IO_L25N_2	L1		
2	IO_L25P_2	L2		
2	IO_L26N_2	U12		
2	IO_L26P_2	V12		
2	IO_L27N_2	M7		
2	IO_L27P_2	L6		
2	IO_L28N_2/VREF_2	M5		
2	IO_L28P_2	M6		
2	IO_L29N_2	U10		
2	IO_L29P_2	U11		
2	IO_L30N_2	M3		
2	IO_L30P_2	M4		
2	IO_L31N_2	N6		
2	IO_L31P_2	N7		
2	IO_L32N_2	U7		
2	IO_L32P_2	U8		
2	IO_L33N_2	N3		
2	IO_L33P_2	N4		
2	IO_L34N_2/VREF_2	N2		
2	IO_L34P_2	M2		
2	IO_L35N_2	V10		
2	IO_L35P_2	V11		
2	IO_L36N_2	P6		
2	IO_L36P_2	P7		
2	IO_L37N_2	P1		
2	IO_L37P_2	P2		
2	IO_L38N_2	V8		
2	IO_L38P_2	V9		
2	IO_L39N_2	R6		
2	IO_L39P_2	P5		
2	IO_L40N_2/VREF_2	R4		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 907 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	IO_L40P_2	R5		
2	IO_L41N_2	V6		
2	IO_L41P_2	V7		
2	IO_L42N_2	R3		
2	IO_L42P_2	P3		
2	IO_L43N_2	R1		
2	IO_L43P_2	R2		
2	IO_L44N_2	W10		
2	IO_L44P_2	W11		
2	IO_L45N_2	T7		
2	IO_L45P_2	R7		
2	IO_L46N_2/VREF_2	T4		
2	IO_L46P_2	T5		
2	IO_L47N_2	W9		
2	IO_L47P_2	Y10		
2	IO_L48N_2	T1		
2	IO_L48P_2	T2		
2	IO_L49N_2	U6		
2	IO_L49P_2	T6		
2	IO_L50N_2	W7		
2	IO_L50P_2	Y8		
2	IO_L51N_2	U4		
2	IO_L51P_2	T3		
2	IO_L52N_2/VREF_2	U2		
2	IO_L52P_2	U3		
2	IO_L53N_2	Y11		
2	IO_L53P_2	Y12		
2	IO_L54N_2	V4		
2	IO_L54P_2	V5		
2	IO_L55N_2	V1		
2	IO_L55P_2	V2		
2	IO_L56N_2	Y6		
2	IO_L56P_2	Y7		
2	IO_L57N_2	W5		
2	IO_L57P_2	W6		
2	IO_L58N_2/VREF_2	W3		
2	IO_L58P_2	V3		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 908 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	IO_L59N_2	AA11		
2	IO_L59P_2	AA12		
2	IO_L60N_2	W1		
2	IO_L60P_2	W2		
2	IO_L85N_2	Y2		
2	IO_L85P_2	Y3		
2	IO_L86N_2	AA9		
2	IO_L86P_2	AA10		
2	IO_L87N_2	AA5		
2	IO_L87P_2	AA6		
2	IO_L88N_2/VREF_2	AA4		
2	IO_L88P_2	Y4		
2	IO_L89N_2	AA7		
2	IO_L89P_2	AA8		
2	IO_L90N_2	AA2		
2	IO_L90P_2	AA3		
3	IO_L90N_3	AB5		
3	IO_L90P_3	AB6		
3	IO_L89N_3	AB11		
3	IO_L89P_3	AB12		
3	IO_L88N_3	AB2		
3	IO_L88P_3	AB3		
3	IO_L87N_3/VREF_3	AB4		
3	IO_L87P_3	AC4		
3	IO_L86N_3	AB9		
3	IO_L86P_3	AB10		
3	IO_L85N_3	AC2		
3	IO_L85P_3	AC3		
3	IO_L60N_3	AD5		
3	IO_L60P_3	AD6		
3	IO_L59N_3	AB7		
3	IO_L59P_3	AB8		
3	IO_L58N_3	AD1		
3	IO_L58P_3	AD2		
3	IO_L57N_3/VREF_3	AE4		
3	IO_L57P_3	AE5		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 909/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 909 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	IO_L56N_3	AC11		
3	IO_L56P_3	AC12		
3	IO_L55N_3	AD3		
3	IO_L55P_3	AE3		
3	IO_L54N_3	AE1		
3	IO_L54P_3	AE2		
3	IO_L53N_3	AC6		
3	IO_L53P_3	AC7		
3	IO_L52N_3	AF2		
3	IO_L52P_3	AF3		
3	IO_L51N_3/VREF_3	AF6		
3	IO_L51P_3	AG6		
3	IO_L50N_3	AD10		
3	IO_L50P_3	AD11		
3	IO_L49N_3	AG4		
3	IO_L49P_3	AG5		
3	IO_L48N_3	AF4		
3	IO_L48P_3	AG3		
3	IO_L47N_3	AC10		
3	IO_L47P_3	AD9		
3	IO_L46N_3	AG1		
3	IO_L46P_3	AG2		
3	IO_L45N_3/VREF_3	AG7		
3	IO_L45P_3	AH7		
3	IO_L44N_3	AC8		
3	IO_L44P_3	AD7		
3	IO_L43N_3	AH4		
3	IO_L43P_3	AH5		
3	IO_L42N_3	AH1		
3	IO_L42P_3	AH2		
3	IO_L41N_3	AE10		
3	IO_L41P_3	AE11		
3	IO_L40N_3	AJ6		
3	IO_L40P_3	AJ7		
3	IO_L39N_3/VREF_3	AH6		
3	IO_L39P_3	AJ5		
3	IO_L38N_3	AE8		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 910 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	IO_L38P_3	AE9		
3	IO_L37N_3	AH3		
3	IO_L37P_3	AJ3		
3	IO_L36N_3	AJ1		
3	IO_L36P_3	AJ2		
3	IO_L35N_3	AE6		
3	IO_L35P_3	AE7		
3	IO_L34N_3	AK6		
3	IO_L34P_3	AK7		
3	IO_L33N_3/VREF_3	AK3		
3	IO_L33P_3	AK4		
3	IO_L32N_3	AE12		
3	IO_L32P_3	AF12		
3	IO_L31N_3	AL5		
3	IO_L31P_3	AL6		
3	IO_L30N_3	AL3		
3	IO_L30P_3	AL4		
3	IO_L29N_3	AF10		
3	IO_L29P_3	AF11		
3	IO_L28N_3	AK2		
3	IO_L28P_3	AL2		
3	IO_L27N_3/VREF_3	AL7		
3	IO_L27P_3	AM6		
3	IO_L26N_3	AF7		
3	IO_L26P_3	AF8		
3	IO_L25N_3	AM4		
3	IO_L25P_3	AM5		
3	IO_L24N_3	AM1		
3	IO_L24P_3	AM2		
3	IO_L23N_3	AG10		
3	IO_L23P_3	AG11		
3	IO_L22N_3	AM7		
3	IO_L22P_3	AN7		
3	IO_L21N_3/VREF_3	AN5		
3	IO_L21P_3	AN6		
3	IO_L20N_3	AG8		
3	IO_L20P_3	AG9		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 911/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 911 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	IO_L19N_3	AM3		
3	IO_L19P_3	AN3		
3	IO_L18N_3	AN1		
3	IO_L18P_3	AN2		
3	IO_L17N_3	AG12		
3	IO_L17P_3	AH12		
3	IO_L16N_3	AP6		
3	IO_L16P_3	AP7		
3	IO_L15N_3/VREF_3	AP3		
3	IO_L15P_3	AP4		
3	IO_L14N_3	AH10		
3	IO_L14P_3	AH11		
3	IO_L13N_3	AR6		
3	IO_L13P_3	AR7		
3	IO_L12N_3	AR4		
3	IO_L12P_3	AR5		
3	IO_L11N_3	AH8		
3	IO_L11P_3	AH9		
3	IO_L10N_3	AR2		
3	IO_L10P_3	AR3		
3	IO_L09N_3/VREF_3	AP2		
3	IO_L09P_3	AR1		
3	IO_L08N_3	AJ10		
3	IO_L08P_3	AJ11		
3	IO_L07N_3	AT7		
3	IO_L07P_3	AT8		
3	IO_L72N_3	AT3		
3	IO_L72P_3	AT4		
3	IO_L71N_3	AJ12		
3	IO_L71P_3	AK12		
3	IO_L70N_3	AT1		
3	IO_L70P_3	AT2		
3	IO_L69N_3/VREF_3	AT6		
3	IO_L69P_3	AU6		
3	IO_L68N_3	AK10		
3	IO_L68P_3	AK11		
3	IO_L67N_3	AT5		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 912 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	IO_L67P_3	AU5		
3	IO_L66N_3	AU1		
3	IO_L66P_3	AU2		
3	IO_L65N_3	AJ9		
3	IO_L65P_3	AK8		
3	IO_L64N_3	AU8		
3	IO_L64P_3	AV8		
3	IO_L63N_3/VREF_3	AU7		
3	IO_L63P_3	AV7		
3	IO_L62N_3	AL8		
3	IO_L62P_3	AL9		
3	IO_L61N_3	AU3		
3	IO_L61P_3	AV2		
3	IO_L84N_3	AV6		
3	IO_L84P_3	AW5		
3	IO_L83N_3	AM8		
3	IO_L83P_3	AM9		
3	IO_L82N_3	AV4		
3	IO_L82P_3	AW4		
3	IO_L81N_3/VREF_3	AV3		
3	IO_L81P_3	AW3		
3	IO_L80N_3	AN9		
3	IO_L80P_3	AP8		
3	IO_L79N_3	AW1		
3	IO_L79P_3	AW2		
3	IO_L78N_3	AY7		
3	IO_L78P_3	AY8		
3	IO_L77N_3	AR8		
3	IO_L77P_3	AR9		
3	IO_L76N_3	AW7		
3	IO_L76P_3	AY6		
3	IO_L75N_3/VREF_3	AY3		
3	IO_L75P_3	AY4		
3	IO_L74N_3	AT9		
3	IO_L74P_3	AU9		
3	IO_L73N_3	AY5		
3	IO_L73P_3	BA5		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 913 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	IO_L06N_3	BA8		
3	IO_L06P_3	BB8		
3	IO_L05N_3	AW8		
3	IO_L05P_3	AW9		
3	IO_L04N_3	BA7		
3	IO_L04P_3	BB7		
3	IO_L03N_3/VREF_3	BA6		
3	IO_L03P_3	BB6		
3	IO_L02N_3	AY9		
3	IO_L02P_3	BA9		
3	IO_L01N_3/VRP_3	BA4		
3	IO_L01P_3/VRN_3	BB4		
4	IO_L01N_4/BUSY/DOUT(1)	AL11		
4	IO_L01P_4/INIT_B	AL12		
4	IO_L02N_4/D0/DIN(1)	AV10		
4	IO_L02P_4/D1	AU10		
4	IO_L03N_4/D2	AN11		
4	IO_L03P_4/D3	AM11		
4	IO_L05_4/No_Pair	AT10		
4	IO_L06N_4/VRP_4	AY11		
4	IO_L06P_4/VRN_4	AY10		
4	IO_L07N_4	BB10		
4	IO_L07P_4/VREF_4	BA10		
4	IO_L08N_4	AU11		
4	IO_L08P_4	AT11		
4	IO_L09N_4	AR11		
4	IO_L09P_4/VREF_4	AP11		
4	IO_L19N_4	AW11		
4	IO_L19P_4	AV11		
4	IO_L20N_4	BB11		
4	IO_L20P_4	BA11		
4	IO_L21N_4	AN12		
4	IO_L21P_4	AM12		
4	IO_L25N_4	AR13		
4	IO_L25P_4	AT12		
4	IO_L26N_4	AV12		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 914 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
4	IO_L26P_4	AU12		
4	IO_L27N_4	AR12		
4	IO_L27P_4/VREF_4	AP12		
4	IO_L28N_4	AW13		
4	IO_L28P_4	AW12		
4	IO_L29N_4	BA12		
4	IO_L29P_4	AY12		
4	IO_L30N_4	AN13		
4	IO_L30P_4	AM13		
4	IO_L34N_4	AU13		
4	IO_L34P_4	AT13		
4	IO_L35N_4	BA13		
4	IO_L35P_4	AY13		
4	IO_L36N_4	AM14		
4	IO_L36P_4/VREF_4	AL14		
4	IO_L76N_4	AR15		
4	IO_L76P_4	AT14		
4	IO_L77N_4	AV14		
4	IO_L77P_4	AU14		
4	IO_L78N_4	AP14		
4	IO_L78P_4	AN14		
4	IO_L79N_4	AW15		
4	IO_L79P_4	AY14		
4	IO_L80_4/No_Pair	BB14		
4	IO_L83_4/No_Pair	BA14		
4	IO_L84N_4	AM15		
4	IO_L84P_4	AL15		
4	IO_L85N_4	AT16		
4	IO_L85P_4	AT15		
4	IO_L86N_4	AV15		
4	IO_L86P_4	AU15		
4	IO_L87N_4	AP15		
4	IO_L87P_4/VREF_4	AN15		
4	IO_L37N_4	AY16		
4	IO_L37P_4	AY15		
4	IO_L38N_4	BB15		
4	IO_L38P_4	BA15		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 915 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
4	IO_L39N_4	AM16		
4	IO_L39P_4	AL16		
4	IO_L43N_4	AR17		
4	IO_L43P_4	AR16		
4	IO_L44N_4	AV16		
4	IO_L44P_4	AU16		
4	IO_L45N_4	AP16		
4	IO_L45P_4/VREF_4	AN16		
4	IO_L10N_4	AW17	NC	
4	IO_L10P_4	AW16	NC	
4	IO_L11N_4	BB16	NC	
4	IO_L11P_4	BA16	NC	
4	IO_L12N_4	AL18	NC	
4	IO_L12P_4	AL17	NC	
4	IO_L16N_4	AU17	NC	
4	IO_L16P_4	AT17	NC	
4	IO_L18N_4	BA17	NC	
4	IO_L18P_4/VREF_4	AY17	NC	
4	IO_L46N_4	AT19		
4	IO_L46P_4	AT18		
4	IO_L47N_4	AN17		
4	IO_L47P_4	AM17		
4	IO_L48N_4	AV18		
4	IO_L48P_4	AU18		
4	IO_L49N_4	AY19		
4	IO_L49P_4	AY18		
4	IO_L50_4/No_Pair	AM19		
4	IO_L53_4/No_Pair	AM18		
4	IO_L54N_4	BB18		
4	IO_L54P_4	BA18		
4	IO_L55N_4	AR20		
4	IO_L55P_4	AR19		
4	IO_L56N_4	AP18		
4	IO_L56P_4	AN18		
4	IO_L57N_4	AV19		
4	IO_L57P_4/VREF_4	AU19		
4	IO_L58N_4	AW20		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 916 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
4	IO_L58P_4	AW19		
4	IO_L59N_4	AP19		
4	IO_L59P_4	AN19		
4	IO_L60N_4	BB19		
4	IO_L60P_4	BA19		
4	IO_L64N_4	AU20		
4	IO_L64P_4	AT20		
4	IO_L65N_4	AL21		
4	IO_L65P_4	AL20		
4	IO_L66N_4	BA20		
4	IO_L66P_4/VREF_4	AY20		
4	IO_L67N_4	AR21		
4	IO_L67P_4	AP21		
4	IO_L68N_4	AN20		
4	IO_L68P_4	AM20		
4	IO_L69N_4	AU21		
4	IO_L69P_4/VREF_4	AT21		
4	IO_L73N_4	AW21		
4	IO_L73P_4	AV21		
4	IO_L74N_4/GCLK3S	AN21		
4	IO_L74P_4/GCLK2P	AM21		
4	IO_L75N_4/GCLK1S	BA21		
4	IO_L75P_4/GCLK0P	AY21		
5	IO_L75N_5/GCLK7S	AY22		
5	IO_L75P_5/GCLK6P	BA22		
5	IO_L74N_5/GCLK5S	AM22		
5	IO_L74P_5/GCLK4P	AN22		
5	IO_L73N_5	AV22		
5	IO_L73P_5	AW22		
5	IO_L69N_5/VREF_5	AT22		
5	IO_L69P_5	AU22		
5	IO_L68N_5	AM23		
5	IO_L68P_5	AN23		
5	IO_L67N_5	AP22		
5	IO_L67P_5	AR22		
5	IO_L66N_5/VREF_5	AY23		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 917/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 917 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
5	IO_L66P_5	BA23		
5	IO_L65N_5	AL23		
5	IO_L65P_5	AL22		
5	IO_L64N_5	AT23		
5	IO_L64P_5	AU23		
5	IO_L60N_5	BA24		
5	IO_L60P_5	BB24		
5	IO_L59N_5	AN24		
5	IO_L59P_5	AP24		
5	IO_L58N_5	AW24		
5	IO_L58P_5	AW23		
5	IO_L57N_5/VREF_5	AU24		
5	IO_L57P_5	AV24		
5	IO_L56N_5	AN25		
5	IO_L56P_5	AP25		
5	IO_L55N_5	AR24		
5	IO_L55P_5	AR23		
5	IO_L54N_5	BA25		
5	IO_L54P_5	BB25		
5	IO_L53_5/No_Pair	AM25		
5	IO_L50_5/No_Pair	AM24		
5	IO_L49N_5	AY25		
5	IO_L49P_5	AY24		
5	IO_L48N_5	AU25		
5	IO_L48P_5	AV25		
5	IO_L47N_5	AM26		
5	IO_L47P_5	AN26		
5	IO_L46N_5	AT25		
5	IO_L46P_5	AT24		
5	IO_L18N_5/VREF_5	AY26	NC	
5	IO_L18P_5	BA26	NC	
5	IO_L16N_5	AT26	NC	
5	IO_L16P_5	AU26	NC	
5	IO_L12N_5	AL26	NC	
5	IO_L12P_5	AL25	NC	
5	IO_L11N_5	BA27	NC	
5	IO_L11P_5	BB27	NC	

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 918 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
5	IO_L10N_5	AW27	NC	
5	IO_L10P_5	AW26	NC	
5	IO_L45N_5/VREF_5	AN27		
5	IO_L45P_5	AP27		
5	IO_L44N_5	AU27		
5	IO_L44P_5	AV27		
5	IO_L43N_5	AR27		
5	IO_L43P_5	AR26		
5	IO_L39N_5	AL27		
5	IO_L39P_5	AM27		
5	IO_L38N_5	BA28		
5	IO_L38P_5	BB28		
5	IO_L37N_5	AY28		
5	IO_L37P_5	AY27		
5	IO_L87N_5/VREF_5	AN28		
5	IO_L87P_5	AP28		
5	IO_L86N_5	AU28		
5	IO_L86P_5	AV28		
5	IO_L85N_5	AT28		
5	IO_L85P_5	AT27		
5	IO_L84N_5	AL28		
5	IO_L84P_5	AM28		
5	IO_L83_5/No_Pair	BA29		
5	IO_L80_5/No_Pair	BB29		
5	IO_L79N_5	AY29		
5	IO_L79P_5	AW28		
5	IO_L78N_5	AN29		
5	IO_L78P_5	AP29		
5	IO_L77N_5	AU29		
5	IO_L77P_5	AV29		
5	IO_L76N_5	AT29		
5	IO_L76P_5	AR28		
5	IO_L36N_5/VREF_5	AL29		
5	IO_L36P_5	AM29		
5	IO_L35N_5	AY30		
5	IO_L35P_5	BA30		
5	IO_L34N_5	AT30		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 919/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 919 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
5	IO_L34P_5	AU30		
5	IO_L30N_5	AM30		
5	IO_L30P_5	AN30		
5	IO_L29N_5	AY31		
5	IO_L29P_5	BA31		
5	IO_L28N_5	AW31		
5	IO_L28P_5	AW30		
5	IO_L27N_5/VREF_5	AP31		
5	IO_L27P_5	AR31		
5	IO_L26N_5	AU31		
5	IO_L26P_5	AV31		
5	IO_L25N_5	AT31		
5	IO_L25P_5	AR30		
5	IO_L21N_5	AM31		
5	IO_L21P_5	AN31		
5	IO_L20N_5	BA32		
5	IO_L20P_5	BB32		
5	IO_L19N_5	AV32		
5	IO_L19P_5	AW32		
5	IO_L09N_5/VREF_5	AP32		
5	IO_L09P_5	AR32		
5	IO_L08N_5	AT32		
5	IO_L08P_5	AU32		
5	IO_L07N_5/VREF_5	BA33		
5	IO_L07P_5	BB33		
5	IO_L06N_5/VRP_5	AY33		
5	IO_L06P_5/VRN_5	AY32		
5	IO_L05_5/No_Pair	AT33		
5	IO_L03N_5/D4	AM32		
5	IO_L03P_5/D5	AN32		
5	IO_L02N_5/D6	AU33		
5	IO_L02P_5/D7	AV33		
5	IO_L01N_5/RDWR_B	AL31		
5	IO_L01P_5/CS_B	AL32		
6	IO_L01P_6/VRN_6	BB39		
6	IO_L01N_6/VRP_6	BA39		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 920 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
6	IO_L02P_6	BA34		
6	IO_L02N_6	AY34		
6	IO_L03P_6	BB37		
6	IO_L03N_6/VREF_6	BA37		
6	IO_L04P_6	BB36		
6	IO_L04N_6	BA36		
6	IO_L05P_6	AW34		
6	IO_L05N_6	AW35		
6	IO_L06P_6	BB35		
6	IO_L06N_6	BA35		
6	IO_L73P_6	BA38		
6	IO_L73N_6	AY38		
6	IO_L74P_6	AU34		
6	IO_L74N_6	AT34		
6	IO_L75P_6	AY39		
6	IO_L75N_6/VREF_6	AY40		
6	IO_L76P_6	AY37		
6	IO_L76N_6	AW36		
6	IO_L77P_6	AR34		
6	IO_L77N_6	AR35		
6	IO_L78P_6	AY35		
6	IO_L78N_6	AY36		
6	IO_L79P_6	AW41		
6	IO_L79N_6	AW42		
6	IO_L80P_6	AP35		
6	IO_L80N_6	AN34		
6	IO_L81P_6	AW40		
6	IO_L81N_6/VREF_6	AV40		
6	IO_L82P_6	AW39		
6	IO_L82N_6	AV39		
6	IO_L83P_6	AM34		
6	IO_L83N_6	AM35		
6	IO_L84P_6	AW38		
6	IO_L84N_6	AV37		
6	IO_L61P_6	AV41		
6	IO_L61N_6	AU40		
6	IO_L62P_6	AL34		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 921/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 921 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
6	IO_L62N_6	AL35		
6	IO_L63P_6	AV36		
6	IO_L63N_6/VREF_6	AU36		
6	IO_L64P_6	AV35		
6	IO_L64N_6	AU35		
6	IO_L65P_6	AK35		
6	IO_L65N_6	AJ34		
6	IO_L66P_6	AU41		
6	IO_L66N_6	AU42		
6	IO_L67P_6	AU38		
6	IO_L67N_6	AT38		
6	IO_L68P_6	AK32		
6	IO_L68N_6	AK33		
6	IO_L69P_6	AU37		
6	IO_L69N_6/VREF_6	AT37		
6	IO_L70P_6	AT41		
6	IO_L70N_6	AT42		
6	IO_L71P_6	AK31		
6	IO_L71N_6	AJ31		
6	IO_L72P_6	AT39		
6	IO_L72N_6	AT40		
6	IO_L07P_6	AT35		
6	IO_L07N_6	AT36		
6	IO_L08P_6	AJ32		
6	IO_L08N_6	AJ33		
6	IO_L09P_6	AR42		
6	IO_L09N_6/VREF_6	AP41		
6	IO_L10P_6	AR40		
6	IO_L10N_6	AR41		
6	IO_L11P_6	AH34		
6	IO_L11N_6	AH35		
6	IO_L12P_6	AR38		
6	IO_L12N_6	AR39		
6	IO_L13P_6	AR36		
6	IO_L13N_6	AR37		
6	IO_L14P_6	AH32		
6	IO_L14N_6	AH33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 922 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
6	IO_L15P_6	AP39		
6	IO_L15N_6/VREF_6	AP40		
6	IO_L16P_6	AP36		
6	IO_L16N_6	AP37		
6	IO_L17P_6	AH31		
6	IO_L17N_6	AG31		
6	IO_L18P_6	AN41		
6	IO_L18N_6	AN42		
6	IO_L19P_6	AN40		
6	IO_L19N_6	AM40		
6	IO_L20P_6	AG34		
6	IO_L20N_6	AG35		
6	IO_L21P_6	AN37		
6	IO_L21N_6/VREF_6	AN38		
6	IO_L22P_6	AN36		
6	IO_L22N_6	AM36		
6	IO_L23P_6	AG32		
6	IO_L23N_6	AG33		
6	IO_L24P_6	AM41		
6	IO_L24N_6	AM42		
6	IO_L25P_6	AM38		
6	IO_L25N_6	AM39		
6	IO_L26P_6	AF35		
6	IO_L26N_6	AF36		
6	IO_L27P_6	AM37		
6	IO_L27N_6/VREF_6	AL36		
6	IO_L28P_6	AL41		
6	IO_L28N_6	AK41		
6	IO_L29P_6	AF32		
6	IO_L29N_6	AF33		
6	IO_L30P_6	AL39		
6	IO_L30N_6	AL40		
6	IO_L31P_6	AL37		
6	IO_L31N_6	AL38		
6	IO_L32P_6	AF31		
6	IO_L32N_6	AE31		
6	IO_L33P_6	AK39		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net



Ex. 1012
CISCO SYSTEMS, INC. / Page 923 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
6	IO_L33N_6/VREF_6	AK40		
6	IO_L34P_6	AK36		
6	IO_L34N_6	AK37		
6	IO_L35P_6	AE36		
6	IO_L35N_6	AE37		
6	IO_L36P_6	AJ41		
6	IO_L36N_6	AJ42		
6	IO_L37P_6	AJ40		
6	IO_L37N_6	AH40		
6	IO_L38P_6	AE34		
6	IO_L38N_6	AE35		
6	IO_L39P_6	AJ38		
6	IO_L39N_6/VREF_6	AH37		
6	IO_L40P_6	AJ36		
6	IO_L40N_6	AJ37		
6	IO_L41P_6	AE32		
6	IO_L41N_6	AE33		
6	IO_L42P_6	AH41		
6	IO_L42N_6	AH42		
6	IO_L43P_6	AH38		
6	IO_L43N_6	AH39		
6	IO_L44P_6	AD36		
6	IO_L44N_6	AC35		
6	IO_L45P_6	AH36		
6	IO_L45N_6/VREF_6	AG36		
6	IO_L46P_6	AG41		
6	IO_L46N_6	AG42		
6	IO_L47P_6	AD34		
6	IO_L47N_6	AC33		
6	IO_L48P_6	AG40		
6	IO_L48N_6	AF39		
6	IO_L49P_6	AG38		
6	IO_L49N_6	AG39		
6	IO_L50P_6	AD32		
6	IO_L50N_6	AD33		
6	IO_L51P_6	AG37		
6	IO_L51N_6/VREF_6	AF37		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 924 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
6	IO_L52P_6	AF40		
6	IO_L52N_6	AF41		
6	IO_L53P_6	AC36		
6	IO_L53N_6	AC37		
6	IO_L54P_6	AE41		
6	IO_L54N_6	AE42		
6	IO_L55P_6	AE40		
6	IO_L55N_6	AD40		
6	IO_L56P_6	AC31		
6	IO_L56N_6	AC32		
6	IO_L57P_6	AE38		
6	IO_L57N_6/VREF_6	AE39		
6	IO_L58P_6	AD41		
6	IO_L58N_6	AD42		
6	IO_L59P_6	AB35		
6	IO_L59N_6	AB36		
6	IO_L60P_6	AD37		
6	IO_L60N_6	AD38		
6	IO_L85P_6	AC40		
6	IO_L85N_6	AC41		
6	IO_L86P_6	AB33		
6	IO_L86N_6	AB34		
6	IO_L87P_6	AC39		
6	IO_L87N_6/VREF_6	AB39		
6	IO_L88P_6	AB40		
6	IO_L88N_6	AB41		
6	IO_L89P_6	AB31		
6	IO_L89N_6	AB32		
6	IO_L90P_6	AB37		
6	IO_L90N_6	AB38		
7	IO_L90P_7	AA40		
7	IO_L90N_7	AA41		
7	IO_L89P_7	AA35		
7	IO_L89N_7	AA36		
7	IO_L88P_7	Y39		
7	IO_L88N_7/VREF_7	AA39		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 925/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 925 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	IO_L87P_7	AA37		
7	IO_L87N_7	AA38		
7	IO_L86P_7	AA33		
7	IO_L86N_7	AA34		
7	IO_L85P_7	Y40		
7	IO_L85N_7	Y41		
7	IO_L60P_7	W41		
7	IO_L60N_7	W42		
7	IO_L59P_7	AA31		
7	IO_L59N_7	AA32		
7	IO_L58P_7	V40		
7	IO_L58N_7/VREF_7	W40		
7	IO_L57P_7	W37		
7	IO_L57N_7	W38		
7	IO_L56P_7	Y36		
7	IO_L56N_7	Y37		
7	IO_L55P_7	V41		
7	IO_L55N_7	V42		
7	IO_L54P_7	V38		
7	IO_L54N_7	V39		
7	IO_L53P_7	Y31		
7	IO_L53N_7	Y32		
7	IO_L52P_7	U40		
7	IO_L52N_7/VREF_7	U41		
7	IO_L51P_7	T40		
7	IO_L51N_7	U39		
7	IO_L50P_7	Y35		
7	IO_L50N_7	W36		
7	IO_L49P_7	T37		
7	IO_L49N_7	U37		
7	IO_L48P_7	T41		
7	IO_L48N_7	T42		
7	IO_L47P_7	Y33		
7	IO_L47N_7	W34		
7	IO_L46P_7	T38		
7	IO_L46N_7/VREF_7	T39		
7	IO_L45P_7	R36		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 926 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	IO_L45N_7	T36		
7	IO_L44P_7	W32		
7	IO_L44N_7	W33		
7	IO_L43P_7	R41		
7	IO_L43N_7	R42		
7	IO_L42P_7	P40		
7	IO_L42N_7	R40		
7	IO_L41P_7	V36		
7	IO_L41N_7	V37		
7	IO_L40P_7	R38		
7	IO_L40N_7/VREF_7	R39		
7	IO_L39P_7	P38		
7	IO_L39N_7	R37		
7	IO_L38P_7	V34		
7	IO_L38N_7	V35		
7	IO_L37P_7	P41		
7	IO_L37N_7	P42		
7	IO_L36P_7	P36		
7	IO_L36N_7	P37		
7	IO_L35P_7	V32		
7	IO_L35N_7	V33		
7	IO_L34P_7	M41		
7	IO_L34N_7/VREF_7	N41		
7	IO_L33P_7	N39		
7	IO_L33N_7	N40		
7	IO_L32P_7	U35		
7	IO_L32N_7	U36		
7	IO_L31P_7	N36		
7	IO_L31N_7	N37		
7	IO_L30P_7	M39		
7	IO_L30N_7	M40		
7	IO_L29P_7	U32		
7	IO_L29N_7	U33		
7	IO_L28P_7	M37		
7	IO_L28N_7/VREF_7	M38		
7	IO_L27P_7	L37		
7	IO_L27N_7	M36		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 927/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 927 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	IO_L26P_7	V31		
7	IO_L26N_7	U31		
7	IO_L25P_7	L41		
7	IO_L25N_7	L42		
7	IO_L24P_7	K40		
7	IO_L24N_7	L40		
7	IO_L23P_7	T34		
7	IO_L23N_7	T35		
7	IO_L22P_7	L38		
7	IO_L22N_7/VREF_7	L39		
7	IO_L21P_7	K36		
7	IO_L21N_7	L36		
7	IO_L20P_7	T32		
7	IO_L20N_7	T33		
7	IO_L19P_7	K41		
7	IO_L19N_7	K42		
7	IO_L18P_7	K37		
7	IO_L18N_7	K38		
7	IO_L17P_7	R34		
7	IO_L17N_7	R35		
7	IO_L16P_7	H42		
7	IO_L16N_7/VREF_7	J41		
7	IO_L15P_7	J39		
7	IO_L15N_7	J40		
7	IO_L14P_7	R32		
7	IO_L14N_7	R33		
7	IO_L13P_7	J36		
7	IO_L13N_7	J37		
7	IO_L12P_7	H40		
7	IO_L12N_7	H41		
7	IO_L11P_7	T31		
7	IO_L11N_7	R31		
7	IO_L10P_7	H38		
7	IO_L10N_7/VREF_7	H39		
7	IO_L09P_7	H36		
7	IO_L09N_7	H37		
7	IO_L08P_7	P34		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 928 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	IO_L08N_7	N35		
7	IO_L07P_7	G41		
7	IO_L07N_7	G42		
7	IO_L72P_7	G39		
7	IO_L72N_7	G40		
7	IO_L71P_7	P32		
7	IO_L71N_7	P33		
7	IO_L70P_7	F38		
7	IO_L70N_7/VREF_7	G38		
7	IO_L69P_7	F37		
7	IO_L69N_7	G37		
7	IO_L68P_7	N32		
7	IO_L68N_7	N33		
7	IO_L67P_7	G35		
7	IO_L67N_7	G36		
7	IO_L66P_7	F41		
7	IO_L66N_7	F42		
7	IO_L65P_7	P31		
7	IO_L65N_7	N31		
7	IO_L64P_7	E41		
7	IO_L64N_7/VREF_7	F40		
7	IO_L63P_7	E36		
7	IO_L63N_7	F36		
7	IO_L62P_7	M34		
7	IO_L62N_7	M35		
7	IO_L61P_7	E35		
7	IO_L61N_7	F35		
7	IO_L84P_7	D40		
7	IO_L84N_7	E40		
7	IO_L83P_7	L34		
7	IO_L83N_7	L35		
7	IO_L82P_7	D39		
7	IO_L82N_7/VREF_7	E39		
7	IO_L81P_7	D38		
7	IO_L81N_7	E37		
7	IO_L80P_7	K34		
7	IO_L80N_7	J35		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 929/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 929 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	IO_L79P_7	D41		
7	IO_L79N_7	D42		
7	IO_L78P_7	C39		
7	IO_L78N_7	C40		
7	IO_L77P_7	H34		
7	IO_L77N_7	H35		
7	IO_L76P_7	C37		
7	IO_L76N_7/VREF_7	D36		
7	IO_L75P_7	B38		
7	IO_L75N_7	C38		
7	IO_L74P_7	F34		
7	IO_L74N_7	G34		
7	IO_L73P_7	C35		
7	IO_L73N_7	C36		
7	IO_L06P_7	A39		
7	IO_L06N_7	B39		
7	IO_L05P_7	D34		
7	IO_L05N_7	D35		
7	IO_L04P_7	A37		
7	IO_L04N_7/VREF_7	B37		
7	IO_L03P_7	A36		
7	IO_L03N_7	B36		
7	IO_L02P_7	B34		
7	IO_L02N_7	C34		
7	IO_L01P_7/VRN_7	A35		
7	IO_L01N_7/VRP_7	B35		
7	VCCO_7	W39		
7	VCCO_7	P39		
7	VCCO_7	K39		
7	VCCO_7	F39		
7	VCCO_7	D37		
7	VCCO_7	W35		
7	VCCO_7	P35		
7	VCCO_7	K35		
7	VCCO_7	M33		
7	VCCO_7	H33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 930 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
7	VCCO_7	AA29		
7	VCCO_7	Y29		
7	VCCO_7	W29		
7	VCCO_7	V29		
7	VCCO_7	U29		
7	VCCO_7	T29		
7	VCCO_7	R29		
7	VCCO_7	AA28		
7	VCCO_7	Y28		
7	VCCO_7	W28		
7	VCCO_7	V28		
7	VCCO_7	U28		
7	VCCO_7	T28		
6	VCCO_6	AU39		
6	VCCO_6	AN39		
6	VCCO_6	AJ39		
6	VCCO_6	AD39		
6	VCCO_6	AW37		
6	VCCO_6	AN35		
6	VCCO_6	AJ35		
6	VCCO_6	AD35		
6	VCCO_6	AR33		
6	VCCO_6	AL33		
6	VCCO_6	AH29		
6	VCCO_6	AG29		
6	VCCO_6	AF29		
6	VCCO_6	AE29		
6	VCCO_6	AD29		
6	VCCO_6	AC29		
6	VCCO_6	AB29		
6	VCCO_6	AG28		
6	VCCO_6	AF28		
6	VCCO_6	AE28		
6	VCCO_6	AD28		
6	VCCO_6	AC28		
6	VCCO_6	AB28		
5	VCCO_5	AW33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 931/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 931 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
5	VCCO_5	AL30		
5	VCCO_5	AW29		
5	VCCO_5	AR29		
5	VCCO_5	AJ26		
5	VCCO_5	AW25		
5	VCCO_5	AR25		
5	VCCO_5	AJ25		
5	VCCO_5	AH25		
5	VCCO_5	AJ24		
5	VCCO_5	AH24		
5	VCCO_5	AJ23		
5	VCCO_5	AH23		
5	VCCO_5	AJ22		
5	VCCO_5	AH22		
4	VCCO_4	AJ21		
4	VCCO_4	AH21		
4	VCCO_4	AJ20		
4	VCCO_4	AH20		
4	VCCO_4	AJ19		
4	VCCO_4	AH19		
4	VCCO_4	AW18		
4	VCCO_4	AR18		
4	VCCO_4	AJ18		
4	VCCO_4	AH18		
4	VCCO_4	AJ17		
4	VCCO_4	AW14		
4	VCCO_4	AR14		
4	VCCO_4	AL13		
4	VCCO_4	AW10		
3	VCCO_3	AG15		
3	VCCO_3	AF15		
3	VCCO_3	AE15		
3	VCCO_3	AD15		
3	VCCO_3	AC15		
3	VCCO_3	AB15		
3	VCCO_3	AH14		
3	VCCO_3	AG14		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 932 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
3	VCCO_3	AF14		
3	VCCO_3	AE14		
3	VCCO_3	AD14		
3	VCCO_3	AC14		
3	VCCO_3	AB14		
3	VCCO_3	AR10		
3	VCCO_3	AL10		
3	VCCO_3	AN8		
3	VCCO_3	AJ8		
3	VCCO_3	AD8		
3	VCCO_3	AW6		
3	VCCO_3	AU4		
3	VCCO_3	AN4		
3	VCCO_3	AJ4		
3	VCCO_3	AD4		
2	VCCO_2	AA15		
2	VCCO_2	Y15		
2	VCCO_2	W15		
2	VCCO_2	V15		
2	VCCO_2	U15		
2	VCCO_2	T15		
2	VCCO_2	AA14		
2	VCCO_2	Y14		
2	VCCO_2	W14		
2	VCCO_2	V14		
2	VCCO_2	U14		
2	VCCO_2	T14		
2	VCCO_2	R14		
2	VCCO_2	M10		
2	VCCO_2	H10		
2	VCCO_2	W8		
2	VCCO_2	P8		
2	VCCO_2	K8		
2	VCCO_2	D6		
2	VCCO_2	W4		
2	VCCO_2	P4		
2	VCCO_2	K4		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 933/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 933 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
2	VCCO_2	F4		
1	VCCO_1	R21		
1	VCCO_1	P21		
1	VCCO_1	R20		
1	VCCO_1	P20		
1	VCCO_1	R19		
1	VCCO_1	P19		
1	VCCO_1	R18		
1	VCCO_1	P18		
1	VCCO_1	H18		
1	VCCO_1	D18		
1	VCCO_1	P17		
1	VCCO_1	H14		
1	VCCO_1	D14		
1	VCCO_1	M13		
1	VCCO_1	D10		
0	VCCO_0	D33		
0	VCCO_0	M30		
0	VCCO_0	H29		
0	VCCO_0	D29		
0	VCCO_0	P26		
0	VCCO_0	R25		
0	VCCO_0	P25		
0	VCCO_0	H25		
0	VCCO_0	D25		
0	VCCO_0	R24		
0	VCCO_0	P24		
0	VCCO_0	R23		
0	VCCO_0	P23		
0	VCCO_0	R22		
0	VCCO_0	P22		
N/A	CCLK	AM10		
N/A	PROG_B	J33		
N/A	DONE	AN10		
N/A	M0	AP33		
N/A	M1	AN33		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 934 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	M2	AM33		
N/A	TCK	K10		
N/A	TDI	M32		
N/A	TDO	M11		
N/A	TMS	L10		
N/A	PWRDWN_B	AP10		
N/A	HSWAP_EN	K33		
N/A	RSVD	J10		
N/A	VBATT	M12		
N/A	DXP	M31		
N/A	DXN	L33		
N/A	VCCINT	AK30		
N/A	VCCINT	N30		
N/A	VCCINT	AJ29		
N/A	VCCINT	P29		
N/A	VCCINT	AJ28		
N/A	VCCINT	AH28		
N/A	VCCINT	R28		
N/A	VCCINT	P28		
N/A	VCCINT	AJ27		
N/A	VCCINT	AH27		
N/A	VCCINT	AG27		
N/A	VCCINT	AF27		
N/A	VCCINT	AE27		
N/A	VCCINT	AD27		
N/A	VCCINT	AC27		
N/A	VCCINT	AB27		
N/A	VCCINT	AA27		
N/A	VCCINT	Y27		
N/A	VCCINT	W27		
N/A	VCCINT	V27		
N/A	VCCINT	U27		
N/A	VCCINT	T27		
N/A	VCCINT	R27		
N/A	VCCINT	P27		
N/A	VCCINT	AH26		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 935/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 935 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	VCCINT	AG26		
N/A	VCCINT	AF26		
N/A	VCCINT	U26		
N/A	VCCINT	T26		
N/A	VCCINT	R26		
N/A	VCCINT	AG25		
N/A	VCCINT	T25		
N/A	VCCINT	AG24		
N/A	VCCINT	T24		
N/A	VCCINT	AG23		
N/A	VCCINT	T23		
N/A	VCCINT	AG22		
N/A	VCCINT	T22		
N/A	VCCINT	AG21		
N/A	VCCINT	T21		
N/A	VCCINT	AG20		
N/A	VCCINT	T20		
N/A	VCCINT	AG19		
N/A	VCCINT	T19		
N/A	VCCINT	AG18		
N/A	VCCINT	T18		
N/A	VCCINT	AH17		
N/A	VCCINT	AG17		
N/A	VCCINT	AF17		
N/A	VCCINT	U17		
N/A	VCCINT	T17		
N/A	VCCINT	R17		
N/A	VCCINT	AJ16		
N/A	VCCINT	AH16		
N/A	VCCINT	AG16		
N/A	VCCINT	AF16		
N/A	VCCINT	AE16		
N/A	VCCINT	AD16		
N/A	VCCINT	AC16		
N/A	VCCINT	AB16		
N/A	VCCINT	AA16		
N/A	VCCINT	Y16		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 936 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	VCCINT	W16		
N/A	VCCINT	V16		
N/A	VCCINT	U16		
N/A	VCCINT	T16		
N/A	VCCINT	R16		
N/A	VCCINT	P16		
N/A	VCCINT	AJ15		
N/A	VCCINT	AH15		
N/A	VCCINT	R15		
N/A	VCCINT	P15		
N/A	VCCINT	AJ14		
N/A	VCCINT	P14		
N/A	VCCINT	AK13		
N/A	VCCINT	N13		
N/A	VCCAUX	BA42		
N/A	VCCAUX	AY42		
N/A	VCCAUX	AL42		
N/A	VCCAUX	AB42		
N/A	VCCAUX	AA42		
N/A	VCCAUX	M42		
N/A	VCCAUX	C42		
N/A	VCCAUX	B42		
N/A	VCCAUX	BB41		
N/A	VCCAUX	A41		
N/A	VCCAUX	BB40		
N/A	VCCAUX	A40		
N/A	VCCAUX	BB31		
N/A	VCCAUX	A31		
N/A	VCCAUX	BB22		
N/A	VCCAUX	A22		
N/A	VCCAUX	BB21		
N/A	VCCAUX	A21		
N/A	VCCAUX	BB12		
N/A	VCCAUX	A12		
N/A	VCCAUX	BB3		
N/A	VCCAUX	A3		
N/A	VCCAUX	BB2		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 937/9

Ex. 1012
CISCO SYSTEMS, INC. / Page 937 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	VCCAUX	A2		
N/A	VCCAUX	BA1		
N/A	VCCAUX	AY1		
N/A	VCCAUX	AL1		
N/A	VCCAUX	AB1		
N/A	VCCAUX	AA1		
N/A	VCCAUX	M1		
N/A	VCCAUX	C1		
N/A	VCCAUX	B1		
N/A	GND	AV42		
N/A	GND	AP42		
N/A	GND	AK42		
N/A	GND	AF42		
N/A	GND	AC42		
N/A	GND	Y42		
N/A	GND	U42		
N/A	GND	N42		
N/A	GND	J42		
N/A	GND	E42		
N/A	GND	BA41		
N/A	GND	AY41		
N/A	GND	C41		
N/A	GND	B41		
N/A	GND	BA40		
N/A	GND	B40		
N/A	GND	BB38		
N/A	GND	AV38		
N/A	GND	AP38		
N/A	GND	AK38		
N/A	GND	AF38		
N/A	GND	AC38		
N/A	GND	Y38		
N/A	GND	U38		
N/A	GND	N38		
N/A	GND	J38		
N/A	GND	E38		
N/A	GND	A38		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 938 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	BB34		
N/A	GND	AV34		
N/A	GND	AP34		
N/A	GND	AK34		
N/A	GND	AF34		
N/A	GND	AC34		
N/A	GND	Y34		
N/A	GND	U34		
N/A	GND	N34		
N/A	GND	J34		
N/A	GND	E34		
N/A	GND	A34		
N/A	GND	AD31		
N/A	GND	W31		
N/A	GND	BB30		
N/A	GND	AV30		
N/A	GND	AP30		
N/A	GND	J30		
N/A	GND	E30		
N/A	GND	A30		
N/A	GND	BB26		
N/A	GND	AV26		
N/A	GND	AP26		
N/A	GND	AE26		
N/A	GND	AD26		
N/A	GND	AC26		
N/A	GND	AB26		
N/A	GND	AA26		
N/A	GND	Y26		
N/A	GND	W26		
N/A	GND	V26		
N/A	GND	J26		
N/A	GND	E26		
N/A	GND	A26		
N/A	GND	AF25		
N/A	GND	AE25		
N/A	GND	AD25		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 939 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	AC25		
N/A	GND	AB25		
N/A	GND	AA25		
N/A	GND	Y25		
N/A	GND	W25		
N/A	GND	V25		
N/A	GND	U25		
N/A	GND	AL24		
N/A	GND	AF24		
N/A	GND	AE24		
N/A	GND	AD24		
N/A	GND	AC24		
N/A	GND	AB24		
N/A	GND	AA24		
N/A	GND	Y24		
N/A	GND	W24		
N/A	GND	V24		
N/A	GND	U24		
N/A	GND	M24		
N/A	GND	BB23		
N/A	GND	AV23		
N/A	GND	AP23		
N/A	GND	AF23		
N/A	GND	AE23		
N/A	GND	AD23		
N/A	GND	AC23		
N/A	GND	AB23		
N/A	GND	AA23		
N/A	GND	Y23		
N/A	GND	W23		
N/A	GND	V23		
N/A	GND	U23		
N/A	GND	J23		
N/A	GND	E23		
N/A	GND	A23		
N/A	GND	AF22		
N/A	GND	AE22		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 940 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	AD22		
N/A	GND	AC22		
N/A	GND	AB22		
N/A	GND	AA22		
N/A	GND	Y22		
N/A	GND	W22		
N/A	GND	V22		
N/A	GND	U22		
N/A	GND	AF21		
N/A	GND	AE21		
N/A	GND	AD21		
N/A	GND	AC21		
N/A	GND	AB21		
N/A	GND	AA21		
N/A	GND	Y21		
N/A	GND	W21		
N/A	GND	V21		
N/A	GND	U21		
N/A	GND	BB20		
N/A	GND	AV20		
N/A	GND	AP20		
N/A	GND	AF20		
N/A	GND	AE20		
N/A	GND	AD20		
N/A	GND	AC20		
N/A	GND	AB20		
N/A	GND	AA20		
N/A	GND	Y20		
N/A	GND	W20		
N/A	GND	V20		
N/A	GND	U20		
N/A	GND	J20		
N/A	GND	E20		
N/A	GND	A20		
N/A	GND	AL19		
N/A	GND	AF19		
N/A	GND	AE19		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 941 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	AD19		
N/A	GND	AC19		
N/A	GND	AB19		
N/A	GND	AA19		
N/A	GND	Y19		
N/A	GND	W19		
N/A	GND	V19		
N/A	GND	U19		
N/A	GND	M19		
N/A	GND	AF18		
N/A	GND	AE18		
N/A	GND	AD18		
N/A	GND	AC18		
N/A	GND	AB18		
N/A	GND	AA18		
N/A	GND	Y18		
N/A	GND	W18		
N/A	GND	V18		
N/A	GND	U18		
N/A	GND	BB17		
N/A	GND	AV17		
N/A	GND	AP17		
N/A	GND	AE17		
N/A	GND	AD17		
N/A	GND	AC17		
N/A	GND	AB17		
N/A	GND	AA17		
N/A	GND	Y17		
N/A	GND	W17		
N/A	GND	V17		
N/A	GND	J17		
N/A	GND	E17		
N/A	GND	A17		
N/A	GND	BB13		
N/A	GND	AV13		
N/A	GND	AP13		
N/A	GND	J13		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 942 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**

Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	E13		
N/A	GND	A13		
N/A	GND	AD12		
N/A	GND	W12		
N/A	GND	BB9		
N/A	GND	AV9		
N/A	GND	AP9		
N/A	GND	AK9		
N/A	GND	AF9		
N/A	GND	AC9		
N/A	GND	Y9		
N/A	GND	U9		
N/A	GND	N9		
N/A	GND	J9		
N/A	GND	E9		
N/A	GND	A9		
N/A	GND	BB5		
N/A	GND	AV5		
N/A	GND	AP5		
N/A	GND	AK5		
N/A	GND	AF5		
N/A	GND	AC5		
N/A	GND	Y5		
N/A	GND	U5		
N/A	GND	N5		
N/A	GND	J5		
N/A	GND	E5		
N/A	GND	A5		
N/A	GND	BA3		
N/A	GND	B3		
N/A	GND	BA2		
N/A	GND	AY2		
N/A	GND	C2		
N/A	GND	B2		
N/A	GND	AV1		
N/A	GND	AP1		
N/A	GND	AK1		

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 943/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 943 of 947

Table 14: **FF1696 — XC2VP100 and XC2VP125**


Bank	Pin Description	Pin Number	No Connects	
			XC2VP100	XC2VP125
N/A	GND	AF1		
N/A	GND	AC1		
N/A	GND	Y1		
N/A	GND	U1		
N/A	GND	N1		
N/A	GND	J1		
N/A	GND	E1		

Notes:
1. See Table 4 for an explanation of the signals available on this pin.

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 944 of 947

FF1696 Flip-Chip Fine-Pitch BGA Package Specifications (1.00mm pitch)

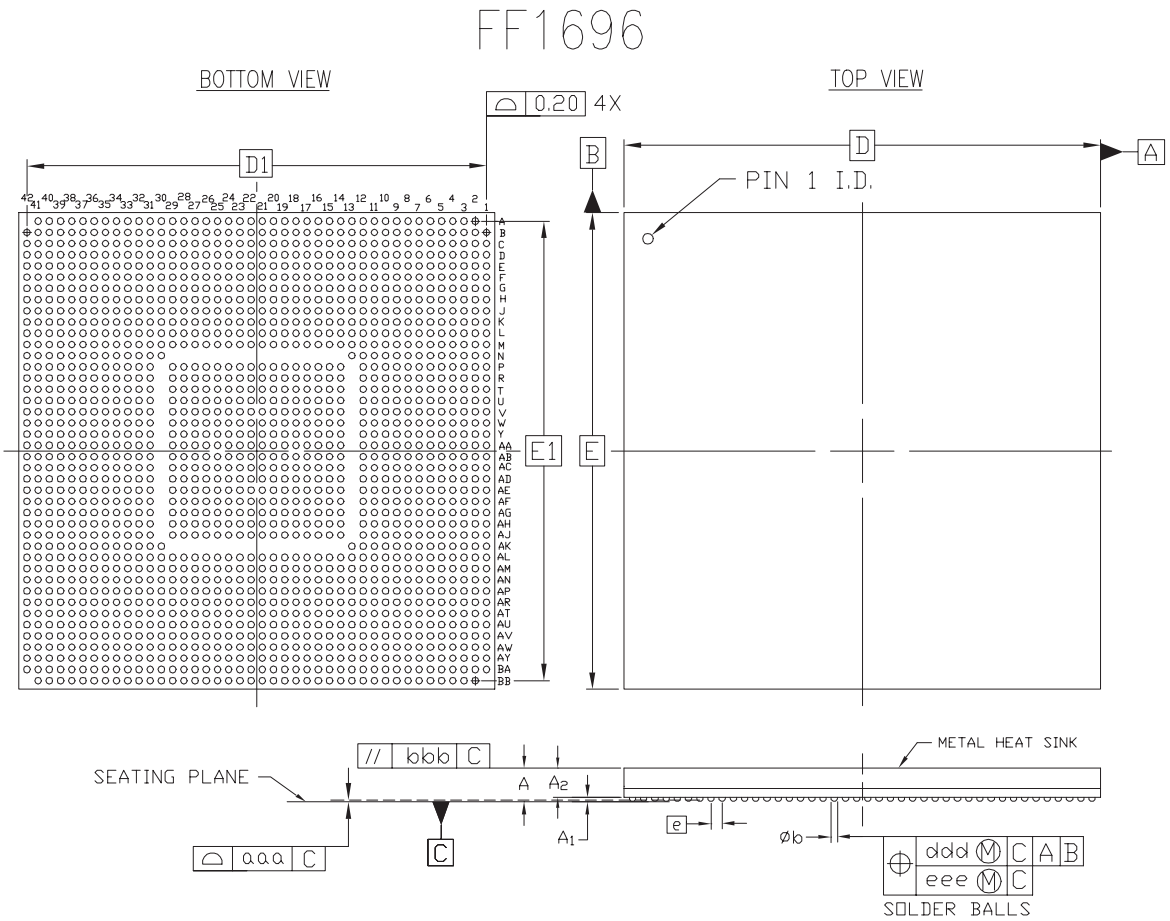

SYMBOL	MILLIMETERS			NOTE
	MIN.	NOM.	MAX.	
A		3.20	3.45	
A_1	0.40	0.50	0.60	
A_2			2.85	
D/E	42.50 BASIC			
D_1/E_1	41.00 REF			
e	1.00 BASIC			
øb	0.50	0.60	0.70	
aaa			0.20	
bbb			0.25	
ddd			0.25	
eee			0.10	
M		42		2

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ASME Y14.5M–1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS–034–AAV–1 (DEPOPULATED)

Figure 10: **FF1696 Flip-Chip Fine-Pitch BGA Package Specifications**

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net
Page 945/9
Ex. 1012
CISCO SYSTEMS, INC. / Page 945 of 947

Revision History

This section records the change history for this module of the data sheet.

Date	Version	Revision
01/31/02	1.0	Initial Xilinx release.
08/14/02	2.0	Added package and pinout information for new devices.
08/27/02	2.1	• Updated SelectIO-Ultra information in Table 4. (Table deleted in v2.3.) • Corrected direction for RXNPAD and TXPPAD in Table 4 (formerly Table 5).
09/27/02	2.2	Corrected Table 2 and Table 3 entries for XC2VP30, FF1152 package, maximum I/Os from 692 to 644.
11/20/02	2.3	Added Number of Differential Pairs data to Table 3. Removed former Table 4.
12/03/02	2.4	Corrections in Table 4: • Reclassified GCLKx (S/P) pins as Input/Output, since these pins can be used as normal I/Os if not used as clocks. • Added cautionary note to PWRDWN_B pin, indicating that this function is not supported.
01/20/03	2.5	Added and removed package/pinout information for existing devices: • In Table 1, added FG676 package information. • In Table 3, added FG676 package option for XC2VP20, XC2VP30, and XC2VP40. • In Table 12, removed FF1517 package option for XC2VP40. • Added FG676 package pinouts (Table 7) for XC2VP20, XC2VP30, and XC2VP40. • Added package diagram (Figure 3) for FG676 package.
05/19/03	2.5.1	• Added section **BREFCLK Pin Definitions**, page 5. • Added clarification to Table 4 and all device pinout tables regarding the dual-use nature of pins D0/DIN and BUSY/DOUT during configuration.
05/22/03	2.5.2	• Added notation of "open-drain" to TDO pin in Table 4.
06/19/03	2.5.3	• The final GND pin in each of six pinout tables was inadvertently deleted in v2.5.1. This revision restores the deleted GND pins as follows: - Pin A1, Table 6, page 15 (FG456) - Pin AF26, Table 7, page 29 (FG676) - Pin AN34, Table 10, page 96 (FF1152) - Pin E1, Table 11, page 128 (FF1148) - Pin C38, Table 12, page 160 (FF1517) - Pin E1, Table 14, page 250 (FF1696)

Virtex-II Pro Data Sheet

The Virtex-II Pro Data Sheet contains the following modules:

- Virtex-II Pro™ Platform FPGAs: Introduction and Overview (Module 1)
- Virtex-II Pro™ Platform FPGAs: Functional Description (Module 2)
- Virtex-II Pro™ Platform FPGAs: DC and Switching Characteristics (Module 3)
- Virtex-II Pro™ Platform FPGAs: Pinout Information (Module 4)

Document Id: 3CEFA0D0-CDBA-11ED-ABF7-B5452D5AF8E9
OnlineNotary.net

Ex. 1012
CISCO SYSTEMS, INC. / Page 946 of 947

JURAT ATTACHMENT

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

STATE OF Tennessee }

COUNTY OF Cheatham }

The foregoing instrument was subscribed and sworn before me this date of 03/29/2023, by Nathaniel Frank-White

This notarial act was an online notarization.

SAMANTHA B. DOMINGUEZ
STATE OF TENNESSEE
NOTARY PUBLIC
COUNTY OF CHEATHAM

ONLINE NOTARY PUBLIC
MY COMMISION EXPIRES: JULY 26 2025

(Notary Seal)

Notary's Signature Samantha B. D

Registration No.: 0

Commission Expiration Date: July 26, 2025