8366373

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

April 18, 2023

THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE RECORDS OF THIS OFFICE OF THE FILE WRAPPER AND CONTENTS OF:

APPLICATION NUMBER: *16/597,325*
FILING DATE: *October 09, 2019*
PATENT NUMBER: *10841958*
ISSUE DATE: *November 17, 2020*

Certified by

Performing the Functions and Duties of the
Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Exhibit 1007
IPR2024-00402
U.S. Patent 10,841,958

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Atty. Dkt.: 161083_1US_1035-1394

Date: October 9, 2019

Attached for filing is the **UTILITY** patent application of:
First Named Inventor: ISHII, Atsushi
Entitled: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
including the attachments as noted below:

Application and Signed Documents
45 pages of Specification, Claims and Abstract (including 6 numbered claims)
31 sheets of Drawing(s) (Figures 1 - 36)
☒ Declaration ☐ Combined Declaration and Assignment (submitted via EPAS) ☐ Verified Translation of Declaration
☐ Newly executed; ☒ A copy from a prior application (37 CFR 1.63(d))
☐ Assignment and Recordation Form Cover Sheet (paper filing) ☐ Assignment (submitted via EPAS)
☒ Power of Attorney ☒ 37 CFR 3.73(b) or 37 CFR 3.73(c) Statement ☒ General Power of Attorney Transmittal Letter
☒ Application Data Sheet
☐ English Translation

Priority Claim (Domestic and/or Foreign) (**must** be included in Application Data Sheet)
☒ Provisional/Nonprovisional Application(s) are identified in attached Application Data Sheet
☒ Continuation/Division/Continuation-In-Part parent application(s) are identified in attached Application Data Sheet
☐ PCT/foreign application(s) is/are identified in attached Application Data Sheet
☒ Incorporation by Reference statement is in the specification or Preliminary Amendment
☒ Copy the incorporation by reference from the specification or Preliminary Amendment and insert text here:
This application is a continuation application of U.S. Patent Application 15/659,060 filed July 25, 2017, and claims the priority and benefit of United States Provisional Patent application 62/368,126, filed July 28, 2016, both of which are incorporated herein by reference in their entirety

Certified Copy/Copies
☐ Certified copy(ies) of foreign application(s) attached
☐ Certified copy(ies) filed on in prior Application No. filed
☐ Interim copy(ies) of priority document(s) (effective March 16, 2013)
☐ Request to Retrieve Electronic Priority Application(s) (for a non-EPO priority doc that is of record in an EPO application or a non-JPO priority document that is of record in a JPO application)

Prior U.S. Application(s)
☐ Request under 37 CFR 1.48(a) to delete inventor(s) named in prior application
☐ Petition filed in prior application to extend its life to ensure co-pendency of parent application

Preliminary Amendment
☐ Preliminary Amendment (Please enter the attached Preliminary Amendment prior to calculation of claims fees.)

Information Disclosure Statement
☒ Information Disclosure Statement (IDS) and Form(s) PTO/SB/08 or equivalent
☐ Copies of newly cited publications, other than U.S. patents and U.S. patent application publications, are attached
☐ English language and/or "concise explanation" is/was provided for each foreign language document
☒ Form(s) PTO/SB/08 or equivalent listing the references cited in the parent application(s) (for continuing cases)

Other Documents
☐ Non-Publication Request
☐ Nucleotide and/or Amino Acid Sequence Submission ☐ Computer Readable Form (CRF)/☐ Specification Sequence Listing on ☐ CD-ROM or CD-R (2 copies) or ☐ Paper/☐ Statements verifying identity of above copies
☐ Authorization to Permit Access to Search Results by the European Patent Office (EPO) (Form PTO/SB/69 or equivalent)
☐ Other (itemize each attachment):

Small Entity

☐ Applicant claims "small entity" status. ☐ "Small entity" statement(s) attached

Micro Entity

☐ Applicant claims "micro entity" status. ☐ Micro entity certification statement filed herewith.

Fee Calculation

Utility Basic Filing Fee					$300.00 (1011)/$150.00 (2011)/$75.00 (3011) $75.00 (4011)	$	300.00
Utility Search Fee					$660.00 (1111)/$330.00 (2111)/$165.00 (3111)	$	660.00
Utility Examination Fee					$760.00 (1311)/$380.00 (2311)/$190.00 (3311)	$	760.00
Utility Application Size Fee ($400.00 (1081)/$200.00 (2081)/$100.00 (3081))for each additional 50 pages that exceeds 100 pages):							
Paper filing: Total pages:	-100 = 0	=	0		$0.00 (1081) /$0.00 (2081)/$0.00 (3081)	$	
Surcharge for Paper Filing					$400.00 (1090)/$200.00 (2090)/$200.00 (3090)	$	
E-filing:					$0.00(1081) /$0.00 (2081)/$0.00 (3081)	$	
Total pages: 76 *.75 = 57–100 = 0/50		=	0				
Total effective claims	6 - 20 (at least 20) =		0	x $100.00	= $0.00 (1202)/$0.00 (2202)/$0.00 (3202)	$	
Independent claims	4 - 3 (at least 3) =		1	x $460.00	= $0.00 (1201)/$0.00 (2201)/$0.00 (3201)	$	460.00
If any proper multiple dependent claims now added for first time, add (ignore improper)					$820.00 (1203)/$410.00 (2203)/$205.00 (3203)	$	
Assignment Recording Fee					$50.00 (8021) **/$0 if filed electronically**	$	
Prepayment of Surcharge for Late Declaration					$160.00 (1051)/$80.00 (2051)/$40.00 (3051)	$	
English translation of specification and claims					$140.00 (1053)/$70.00 (2053)/$35.00 (3053)	$	
					TOTAL FEE	**$**	**2,180.00**

☒ CREDIT CARD OR DEPOSIT ACCOUNT PAYMENT (CREDIT CARD FORM ATTACHED IF PAPER FILING).

Extension of Time

Any future submission requiring an extension of time is hereby stated to include a petition for such time extension.

Deposit Account Authorization

The Commissioner is hereby authorized to charge any deficiency, or credit any overpayment, in the fee(s) filed, or asserted to be filed, or which should have been filed herewith (or with any paper hereafter filed in this application by this firm) to Deposit Account No. 14-1140. However, **authorization is NOT given** hereby **to charge any extra claims fees or multiple dependent claims fees**.

Correspondence Address:
Customer Number: **23117**
Telephone: (703) 816-4000
Facsimile: (703) 816-4100
HWB:lsh

NIXON & VANDERHYE P.C.
By Attorney: H. Warren Burnam, Jr., Reg. No. 29,366

Signature: /H. Warren Burnam, Jr./

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of
ISHII

Conf. No.:
Atty. Dkt. No.: 161083_1US_1035-1394

Appln. No. To be assigned

Art Unit: To Be Assigned

Filed: October 9, 2019

Examiner: To Be Assigned

For: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

* * * * * * * * * * *

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Date: October 9, 2019

INFORMATION DISCLOSURE STATEMENT

Sir:

Attention is invited to the literature and patent citations of record in the parent application Serial No. 15/659,060 where copies of these documents may be found. Also attached is a completed form PTO-SB08a listing references submitted in IDS's and cited by the Examiner in PTO-892's in Office Actions from the parent application.

Official citation and consideration of all the attached documents is requested. Please return to the undersigned a copy of the attached PTO-1449 with the examiner's initials in the left column [MPEP §609] with the next communication.

The filing of an information disclosure statement shall not be construed as a representation that a search has been made [37 C.F.R. § 1.97(g)], an admission that the information cited is, or is considered to be, material to patentability or that no other material information exists. Further, the filing of an information disclosure statement shall not be construed as an admission against interest in any manner [Commissioner's Notice of January 9, 1992, 1135 O.G. 12-25 at 25].

Respectfully submitted,
NIXON & VANDERHYE P.C.

By: /H. Warren Burnam, Jr./
H. Warren Burnam, Jr.
Reg. No. 29,366

HWB:lsh
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

INFORMATION DISCLOSURE CITATION	ATTY. DOCKET NO.	APPLICATION NO.
	161083_1US_1035-1394	To be assigned
	INVENTOR(S)	
	ISHII	
(Use several sheets if necessary)	FILING DATE	ART UNIT
	October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE
		2018/0110036	4-2018	Tabet			
		8,837,404	9-2014	Cha			
		8,379,567	2-2013	Cho			
		2018/0132165	5-208	Takahashi			
		2009/0221293	9-2009	Petrovic			
		2015/0223148	8-2015	Shi			
		2016/0234759	8-0216	Kubota			
		2016/0150506	5/2016	Tabet			
		2016/0143017	5/2016	Yang			
		2015/0334766	11-2015	Lee			
		2010/0227611	9-2010	Schmidt			
		2015/0223148	8-2015	Qualcomm Incorporated			
		2016/0150506	5-2016	Apple Inc.			
		2009/0262693	10-2009	Wang et al.			
		8,538,444	9-2013	Lee et al.			
		2018/0035468	2-2018	Ishii			

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2015/143244 A1	9-2015	WIPO/PCT				
		WO 2008/044664 A1	4-2008	PCT				
		2 816 741 A2	12-2014	EP				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Notice of Allowance mailed April 19, 2019 in U.S. Patent Application 15/658,980
		Allowed Claims from U.S. Patent Application 15/658,980
		International Preliminary Report on Patentability mailed January 29, 2019 in PCT Application No. PCT/US17/43587
		International Search Report and Written Opinion mailed October 6, 2017 in PCT Application No. PCT/US17/43587
		R2-163853, 3GPP TSG-RAN WG2 Meeting #94, ETRI, "System information handling in NR", Nanjing, China, 23rd – 27th May 2016
		R2-163743, 3GPP TSG-RAN WG2 Meeting #94, ZTE, "Consideration on the System Information in NR", Nanjing, P.R. China, 23th – 27th May 2016
		R2-163586, 3GPP TSG-RAN WG2 Meeting #94, Intel Corporation, "System information for standalone NR deployment", Nanjing, China, 23 - 27 May 2016
		R2-163470, 3GPP TSG RAN WG2 Meeting #94, CATT, "System information in NR", Nanjing, China, May 23rd – 27th, 2016
		R2-163371, 3GPP TSG-RAN WG2 Meeting #94, Samsung, "System Information Signalling Design in NR", Nanjing, China, 23-27 May 2016
		R2-164127, 3GPP TSG-RAN2 Meeting #94, Huawei, HiSilicon, "System information design", Nanjing, China, 23 - 27 May, 2016
		R2-164122, 3GPP TSG-RAN WG2 Meeting #94, Qualcomm Incorporated, Convida Wireless, "NR System Information Provisioning", Nanjing, China 23rd – 27th May 2016

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

INFORMATION DISCLOSURE CITATION	ATTY. DOCKET NO.	APPLICATION NO.
	161083_1US_1035-1394	To be assigned
	INVENTOR(S)	
	ISHII	
(Use several sheets if necessary)	FILING DATE	ART UNIT
	October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Tdoc R2-164088, 3GPP TSG-RAN WG2 #94, InterDigital Communications, "System Information Acquisition for New Radio Access", Nanjing, China, May 23rd – 27th, 2016
		R2-164078, 3GPP TSG-RAN WG2 #94 R2-164078, LG Electronics Inc., "Observations about on-demand SI delivery mechanism", Nanjing, China, 23 – 27 May, 2016
		R2-164067, 3GPP TSG-RAN WG2 Meeting #94, Convida Wireless, "NR System Information Aspects", Nanjing, China, 23rd – 27th May 2016
		Tdoc R2-164006, 3GPP TSG-RAN WG2 #94, Ericsson, "Requirements for System Information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		Tdoc R2-163997, 3GPP TSG-RAN WG2 #94, Ericsson, "Solution principles for system information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		R2-163980, 3GPP TSG RAN WG2 Meeting #94, NEC, "System information on demand in standalone NR", Nanjing, China, 23rd -27th May 2016
		R2-163977, 3GPP TSG RAN WG2 Meeting #94, Sony, "System Information Enhancements for NR", Nanjing, China, 23 - 27 May 2016
		R2-163975, 3GPP TSG-RAN WG2 #94, NTT DOCOMO, INC., "System Information design for standalone NR operation", Nanjing, China, 23th – 27th May 2016
		Office Action mailed September 26, 2018 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed February 21, 2019 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed June 17, 2019 in U.S. Patent Application 15/659,060

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

This application is a continuation application of U.S. Patent Application 15/659,060 filed July 25, 2017, and claims the priority and benefit of United States Provisional Patent application 62/368,126, filed July 28, 2016, both of which are incorporated herein by reference in their entirety.

TECHNICAL FIELD

[0001] The technology relates to wireless communications, and particularly to methods and apparatus for requesting, transmitting, and using system information (SI) in wireless communications.

BACKGROUND

[0002] In wireless communication systems, a radio access network generally comprises one or more access nodes (such as a base station) which communicate on radio channels over a radio or air interface with plural wireless terminals. In some technologies such a wireless terminal is also called a User Equipment (UE). A group known as the 3rd Generation Partnership Project ("3GPP") has undertaken to define globally applicable technical specifications and technical reports for present and future generation wireless communication systems. The 3GPP Long Term Evolution ("LTE") and 3GPP LTE Advanced (LTE-A) are projects to improve an earlier Universal Mobile Telecommunications System ("UMTS") mobile phone or device standard in a manner to cope with future requirements.

[0003] In typical cellular mobile communication systems, the base station broadcasts on the radio channels certain information which is required for mobile stations to access to the network. In Long-Term Evolution (LTE) and LTE Advanced (LTE-A), such information is called "system information" ("SI"). Each access node, such as an evolved NodeB ("eNB"), broadcasts such system information to its coverage area via several System Information Blocks (SIBs) on downlink radio resources allocated to the access node.

[0004] A wireless terminal ("UE"), after entering a coverage area of an eNB, is required to obtain all the SIBs which are necessary to access to the system. For sake of UEs under coverage, the eNB periodically broadcasts all SIBs relevant for offered services, not just SIBs that are required for access to the system. Each type of SIBs is transmitted in a designated radio resource(s) with its own pre-determined/configurable frequency.

[0005] This all-broadcast-based periodic delivery method (e.g., collective broadcast of all SIBs, not just those necessary for system access) is efficient under a condition where many UEs are almost always flowing into the coverage area (such as a macro cell). However, this approach may result in wasting valuable radio resources in case of small cell deployment. Therefore, more efficient methods of SIB transmission are desired.

[0006] What is needed, therefore, and an example object of the technology disclosed herein, are methods, apparatus, and techniques for more efficient transmission of system information blocks (SIBs).

SUMMARY

[0007] In one of its example aspects the technology disclosed herein concerns an access node of a radio access network comprising processor circuitry and a transmitter. The processor circuitry is configured, upon a change of content of system information, to include, in a broadcast message comprising first system information which is broadcast from the access node, an indication of when the access node is scheduled to broadcast second system information which is not included in the first system information. The transmitter is configured to transmit, over a radio interface, the broadcast message comprising the first system information and thereafter the broadcast of the second system information according to the indication.

[0008] In another of its example aspects the technology disclosed herein concerns a method in an access node of a radio access network. In a basic mode the method comprises: upon a change of content of system information, using processor circuitry to include, in a broadcast message comprising first system information which is broadcast from the access node, an indication of when the access node is scheduled to broadcast second system

information which is not included in the first system information; and, transmitting, over a radio interface, the broadcast message comprising the first system information and thereafter the broadcast of the second system information according to the indication.

[0009] In yet another of its example aspects the technology disclosed herein concern a wireless terminal which communicates over a radio interface with an access node of a radio access network. The wireless terminal comprises a receiver and processor circuitry. The receiver is configured to receive messages from the access node including a first broadcast message and a second broadcast message. The processor circuitry is configured to: determine, from the first broadcast message, scheduling information concerning the second broadcast message; and obtain system information from the second broadcast message based on the scheduling information.

[00010] In still another of its example aspects the technology disclosed herein concerns a method in a wireless terminal which communicates over a radio interface with an access node of a radio access network. In a basic mode the method comprises: receiving messages from the access node including a first broadcast message and a second broadcast message; and, using processor circuitry to: determine, from the first broadcast message, scheduling information concerning the second broadcast message; obtain system information from the second broadcast message based on the scheduling information

BRIEF DESCRIPTION OF THE DRAWINGS

[00011] The foregoing and other objects, features, and advantages of the technology disclosed herein will be apparent from the following more particular description of preferred embodiments as illustrated in the accompanying drawings in which reference characters refer to the same parts throughout the various views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the technology disclosed herein.

[00012] Fig. 1 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides a value tag for system information (SI).

[00013] Fig. 2 is a diagrammatic view of a node-available system information message according to an example embodiment and mode.

[00014] Fig. 3 is a flowchart showing example, representative, basic acts or steps performed by the radio access node of Fig. 1.

[00015] Fig. 4 is a flowchart showing example, representative, basic acts or steps performed by the wireless terminal of Fig. 1

[00016] Fig. 5 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides a value tag for system information (SI) along with differentiated delivery of system information (SI).

[00017] Fig. 6 is a diagrammatic view showing example message flow for the example communications system of Fig. 5.

[00018] Fig. 7 is a diagrammatic view showing an example format of an *Essential System Information* message according to an example implementation of the system of Fig. 5.

[00019] Fig. 8 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides a value tag for system information (SI) along with definition of a base of second type system information to which the value tag applies.

[00020] Fig. 9 is a diagrammatic view showing example message flow for the example communications system of Fig. 8.

[00021] Fig. 10 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the wireless terminal provides a stored value tag for stored second type system information system information (SI) when requesting second type system information from the radio access node.

[00022] Fig. 11 is a diagrammatic view showing example message flow for the example communications system of Fig. 1-.

[00023] Fig. 12 is a flowchart showing example, representative, basic acts or steps performed by the radio access node of Fig. 10 in implementing certain acts of Fig. 11.

[00024] Fig. 13 is a flowchart showing example, representative, basic acts or steps performed by the wireless terminal of Fig. 10 in implementing certain acts of Fig. 11.

[00025] Fig. 14 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides a value tag which is associated with a group of plural system information blocks (SIBs).

[00026] Fig. 15 is a diagrammatic view showing an example format of an *Essential System Information* message according to an example implementation of the system of Fig. 14, wherein multiple *sibId*s associated with one *valueTag* forms a non-essential SIB group.

[00027] Fig. 16 is a diagrammatic view showing example message flow for the example communications system of Fig. 14.

[00028] Fig. 17 is a flowchart showing example, representative, basic acts or steps performed by the radio access node of Fig. 14 in implementing certain acts of Fig. 16.

[00029] Fig. 18 is a flowchart showing example, representative, basic acts or steps performed by the wireless terminal of Fig. 14 in implementing certain acts of Fig. 16.

[00030] Fig. 19 is a diagrammatic view showing example message flow for another example embodiment and mode which combines features of the embodiment and mode of Fig. 10 and the embodiment and mode of Fig. 14.

[00031] Fig. 20 is a diagrammatic views showing an example message flow for yet other example embodiments and modes.

[00032] Fig. 21 is a diagrammatic view showing an example format of an Essential System Information message according to an example implementation of the system of Fig. 20.

[00033] Fig. 22 – Fig. 25 are diagrammatic views showing example message flows for still yet other example embodiments and modes.

[00034] Fig. 26 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides an automatic broadcast-after-update for system information.

[00035] Fig. 27 is a diagrammatic view showing example message flow for the example communications system of Fig. 16.

[00036] Fig. 28 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides an automatic broadcast-after-update for system information for a group of second type system information blocks.

[00037] Fig. 29 is a flowchart showing example, representative, basic acts or steps performed by the radio access node of Fig. 28.

[00038] Fig. 30 is a flowchart showing example, representative, basic acts or steps performed by the wireless terminal of Fig. 28.

[00039] Fig. 31 is a diagrammatic view showing example message flow for the example communications system of Fig. 28.

[00040] Fig. 32 is a diagrammatic view showing an example format of an Essential System Information message according to an example implementation of the system of Fig. 28.

[00041] Fig. 33 is a schematic view showing an example communications system comprising a radio access node and a wireless terminal, and wherein the radio access node provides a compressed automatic broadcast-after-update message for second type system information blocks.

[00042] Fig. 34 is a diagrammatic view showing example message flow for the example communications system of Fig. 33.

[00043] Fig. 35 is a diagrammatic view showing example message flow for an example communications system such as that of Fig. 33 which also uses compression.

[00044] Fig. 36 is a diagrammatic view showing example electronic machinery which may comprise node electronic machinery or terminal electronic machinery.

DETAILED DESCRIPTION

[00045] In the following description, for purposes of explanation and not limitation, specific details are set forth such as particular architectures, interfaces, techniques, etc. in order to provide a thorough understanding of the technology disclosed herein. However, it will be apparent to those skilled in the art that the technology disclosed herein may be practiced in other embodiments that depart from these specific details. That is, those skilled in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the technology disclosed herein and are included within its spirit and scope. In some instances, detailed descriptions of well-known devices, circuits, and methods are omitted so as not to obscure the description of the technology disclosed herein with unnecessary detail. All statements herein reciting principles, aspects, and embodiments of the technology disclosed herein, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

[00046] Thus, for example, it will be appreciated by those skilled in the art that block diagrams herein can represent conceptual views of illustrative circuitry or other functional

units embodying the principles of the technology. Similarly, it will be appreciated that any flow charts, state transition diagrams, pseudocode, and the like represent various processes which may be substantially represented in computer readable medium and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

[00047] As used herein, the term "core network" can refer to a device, group of devices, or sub-system in a telecommunication network that provides services to users of the telecommunications network. Examples of services provided by a core network include aggregation, authentication, call switching, service invocation, gateways to other networks, etc.

[00048] As used herein, the term "wireless terminal" can refer to any electronic device used to communicate voice and/or data via a telecommunications system, such as (but not limited to) a cellular network. Other terminology used to refer to wireless terminals and non-limiting examples of such devices can include user equipment terminal, UE, mobile station, mobile device, access terminal, subscriber station, mobile terminal, remote station, user terminal, terminal, subscriber unit, cellular phones, smart phones, personal digital assistants ("PDAs"), laptop computers, netbooks, e-readers, wireless modems, etc.

[00049] As used herein, the term "access node", "node", or "base station" can refer to any device or group of devices that facilitates wireless communication or otherwise provides an interface between a wireless terminal and a telecommunications system. A non-limiting example of a base station can include, in the 3GPP specification, a Node B ("NB"), an enhanced Node B ("eNB"), a home eNB ("HeNB") , a 5G (New Radio [NR]) gNB, or some other similar terminology. Another non-limiting example of a base station is an access point. An access point may be an electronic device that provides access for wireless terminal to a data network, such as (but not limited to) a Local Area Network ("LAN"), Wide Area Network ("WAN"), the Internet, etc. Although some examples of the systems and methods disclosed herein may be described in relation to given standards (e.g., 3GPP Releases 8, 9, 10, 11, and/or 12), the scope of the present disclosure should not be limited in this regard. At least some aspects of the systems and methods disclosed herein may be utilized in other types of wireless communication systems.

[00050] As used herein, the term "telecommunication system" or "communications system" can refer to any network of devices used to transmit information. A non-limiting example of a telecommunication system is a cellular network or other wireless communication system.

[00051] As used herein, the term "cellular network" can refer to a network distributed over cells, each cell served by at least one fixed-location transceiver, such as a base station. A "cell" may be any communication channel that is specified by standardization or regulatory bodies to be used for International Mobile Telecommunications-Advanced ("IMTAdvanced"). All or a subset of the cell may be adopted by 3GPP as licensed bands (e.g., frequency band) to be used for communication between a base station, such as a Node B, and a UE terminal. A cellular network using licensed frequency bands can include configured cells. Configured cells can include cells of which a UE terminal is aware and in which it is allowed by a base station to transmit or receive information.

[00052] Fig. 1 shows an example communications system 20 wherein radio access node 22 communicates over air or radio interface 24 (e.g., Uu interface) with wireless terminal 26. As mentioned above, the radio access node 22 may be any suitable node for communicating with the wireless terminal 26, such as a base station node, or eNodeB ("eNB"), for example. The node 22 comprises node processor circuitry ("node processor 30") and node transceiver circuitry 32. The node transceiver circuitry 32 typically comprises node transmitter circuitry 34 and node receiver circuitry 36, which are also called node transmitter and node receiver, respectively.

[00053] The wireless terminal 26 comprises terminal processor 40 and terminal transceiver circuitry 42. The terminal transceiver circuitry 42 typically comprises terminal transmitter circuitry 44 and terminal receiver circuitry 46, which are also called terminal transmitter 44 and terminal receiver 46, respectively. The wireless terminal 26 also typically comprises user interface 48. The terminal user interface 48 may serve for both user input and output operations, and may comprise (for example) a screen such as a touch screen that can both display information to the user and receive information entered by the user. The user

interface 48 may also include other types of devices, such as a speaker, a microphone, or a haptic feedback device, for example.

[00054] For both the radio access node 22 and radio interface 24, the respective transceiver circuitries 22 include antenna(s). The respective transmitter circuits 34 and 44 may comprise, e.g., amplifier(s), modulation circuitry and other conventional transmission equipment. The respective receiver circuits 36 and 46 may comprise, e.g., e.g., amplifiers, demodulation circuitry, and other conventional receiver equipment.

[00055] In general operation node, 22 and wireless terminal 26 communicate with each other across radio interface 24 using predefined configurations of information. By way of non-limiting example, the radio access node 22 and wireless terminal 26 may communicate over radio interface 24 using "frames" of information that may be configured to include various channels. In Long Term Evolution (LTE), for example, a frame, which may have both downlink portion(s) and uplink portion(s), may comprise plural subframes, with each LTE subframe in turn being divided into two slots. The frame may be conceptualized as a resource grid (a two dimensional grid) comprised of resource elements (RE). Each column of the two dimensional grid represents a symbol (e.g., an OFDM symbol on downlink (DL) from node to wireless terminal; an SC-FDMA symbol in an uplink (UL) frame from wireless terminal to node). Each row of the grid represents a subcarrier. The frame and subframe structure serves only as an example of a technique of formatting of information that is to be transmitted over a radio or air interface. It should be understood that "frame" and "subframe" may be utilized interchangeably or may include or be realized by other units of information formatting, and as such may bear other terminology (such as blocks, for example).

[00056] To cater to the transmission of information between radio access node 22 and wireless terminal 26 over radio interface 24, the node processor 30 and terminal processor 40 of Fig. 1 are shown as comprising respective information handlers. For an example implementation in which the information is communicated via frames, the information handler for radio access node 22 is shown as node frame/signal scheduler/handler 50, while the information handler for wireless terminal 26 is shown as terminal frame/signal handler 52.

[00057] The node processor 30 of radio access node 22 also includes a system information (SI) generator 54. The wireless terminal 26 uses the system information (SI) generated by radio access node 22, and even in some example implementations specifically requests certain system information (SI), in on-demand fashion. To that end the terminal processor 40 of wireless terminal 26 is shown as comprising SIB processor 56.

[00058] The node processor 30, and system information (SI) generator 54 in particular, generates a value tag which is associated with the system information (SI). The value tag, also known as a version tag or "Vtag", is configured to provide an indication of the version or vintage of system information with which the value tag is associated. In example implementations the value tag may take the form of a numeral or character, e.g., "1" for first version, "2" for second version, etc., or "A" for first version, "B", for second version, etc. Any other convention for differentiating between values or versions may instead be employed. To this end system information (SI) generator 54 is shown as comprising value tag generator 57.

[00059] The value tag generator 57 serves, e.g., to change the value tag when a parameter of the system information is changed. For example, the value tag generator 57 may increment a number of the value tag when a parameter of the second type system information is changed.

[00060] The system information (SI) generator 54 also comprises SIB delivery controller 58, which controls the timing and content of delivery of system information (SI), as well as timing and delivery of certain node-available system information ("NASI"). In an example embodiment and mode, illustrated in Fig. 2, the node-available system information comprises a node-available system information message NASIM 59 which includes both an identification of the system information that is available from the radio access node 22, and the value tag associated with that available system information. To this end, the NAAIM 59 of Fig. 2 shows an identification of system information field or information element 59A, and a value tag field or information element 59B.

[00061] Fig. 3 depicts certain example, representative, basic acts or steps performed by the radio access node 22 of Fig. 1. Act 3-1 comprises generating a value tag associated with system information that is available at the radio access node 22. As is understood in the art,

the system information facilitates use of communication services provided by the access node. Act 3-2 comprises transmitting over the radio interface 24 the node-available system information ("NASI"). Such transmission may be by means of the node-available system information message NASIM 59. An arrow 3-2 in Fig. 1 corresponds to act 3-2 (and, in an example implementation, to the node-available system information message NASIM 59). As indicated above and with respect to Fig. 2, the node-available system information message comprises an identification of the system information and the value tag associated with the system information.

[00062] Fig. 4 depicts certain example, representative, basic acts or steps performed by the wireless terminal 26 of Fig. 1. Act 4-1 comprises receiving, from the radio access node 22, the node-available system information message (3-2) which comprises an identification of node-available system information and a node-transmitted value tag associated with the node-available system information. Act 4-2 comprises making a determination, on the basis of the node-transmitted value tag, whether to request that the node-available system information be transmitted to the wireless terminal. If the determination of act 4-2 indicates that the available system information as advertised in the node-available system information message (3-2) should be obtained (e.g., because that available system information has a more recent value tag), then the wireless terminal 26 sends a request message to the radio access node 22 to obtain the advertised system information.

[00063] Fig. 5 illustrates certain example embodiment and mode wherein system information (SI) is classified into plural categories or types, and delivery of each category or type of system information (SI) is separately triggered and thus separately delivered across radio interface 24 to one or more wireless terminals. Accordingly, the system information (SI) generator of radio access node 22 is also known as differentiated delivery SIB generator 54.

[00064] In view of the fact that, in certain example embodiments and modes, the system information (SI) is classified into plural categories or types, the system information (SI) generator 54 is depicted in Fig. 5 as comprising SIB type classifier 60 which defines the plural categories or types of system information, and may further define an association between the plural types and respective system information blocks. For sake of example two representative

categories or types of system information (SI) are shown as defined by the SIB type classifier 60 in Fig. 5: a first type of system information (1TYP SIB) and a second type of system information (2TYP SIB). Definitions and procedures for handling for the first type of system information (1TYP SIB) and the second type of system information (2TYP SIB) may be selectively configured and maintained, and are accordingly reflected by 1TYPSIB controller 62 and 2TYPSIB controller 64, respectively.

[00065] In an example embodiment and mode, the first type of system information (1TYP SIB) is SIB "essential system information", which means system information (SI) which is essential to or minimally required by the wireless terminal 26 for initial access to the radio access network and to radio interface 24 in particular. Essential system information may be also referred as "minimum system information". On the other hand, in the same example embodiment and mode, the second type of system information (2TYP SIB) is non-essential system information (SI). "Non-essential" system information (SI) is defined as all other types of information, and thus excludes the minimal information required for initial access. Non-essential system information may be also referred as "other system information". As such the second type of system information (2TYP SIB) may facilitate utilization of certain features or services provided by or through radio access node 22. Thus, the first type system information comprises information which is periodically broadcasted by the transmitter and which is required for initial access to the radio access network, but the second type system information is not required for initial access to the radio access network.

[00066] In example embodiments and modes described herein, the radio access node 22 separately delivers the different types of system information, e.g., delivers the second type of system information (2TYP SIB) separately from the first type of system information (1TYP SIB). For example, the node processor 30 may schedule periodic transmissions by the transmitter of first type system information over the radio interface; and thereafter or separately from the periodic transmissions of the first type system information, schedule transmission by the transmitter of second type system information over the radio interface. Accordingly, in example embodiments and modes, the SIB delivery controller 58, among other things, may implement the "differentiated" delivery of the second type of system information

(2TYP SIB) apart from the first type of system information (1TYP SIB). As explained herein, the transmission of second type system information may be either by unicast or broadcast.

[00067] Fig. 5 further illustrates that wireless terminal 26 may, after obtaining initial access to the communications system 20 (e.g., as a result of receiving the first type of system information (1TYP SIB)), recognize or appreciate that the wireless terminal 26 may need the second type of system information (2TYP SIB). Thus the wireless terminal 26 may make a special request for the second type of system information (2TYP SIB). The Fig. 5 embodiment and mode is thus an example of the radio access node 22 providing second type system information "on demand". Such request or demand for second type of system information (2TYP SIB) may arise, for example, when the wireless terminal 26 seeks to utilize a certain service provided by the communications system 20 or a functionality of wireless terminal 26 which, although not required for access, may enhance operation of wireless terminal 26. Accordingly, Fig. 5 shows the SIB processor 56 of wireless terminal 26 as comprising 2TYPSIB request generator 70, which may generate a 2TYPSIB request depicted by arrow 5-1.

[00068] Fig. 5 further shows node frame/signal scheduler/handler 50 as comprising 2TYPSIB request handler 72, and further shows the SIB delivery controller 58 as comprising 2TYPSIB response generator 74. In the Fig. 5 embodiment and mode, the 2TYPSIB response generator 74 generates a response message 5-2 which includes one or more requested system information blocks (SIBs), e.g., includes at least one block of the second type system information.

[00069] Thus, in the Fig. 5 embodiment and mode, the node processor 30 schedules periodic transmissions by the transmitter of first type system information over the radio interface. Thereafter or separately from the periodic transmissions of the first type system information, and upon request by the wireless terminal 26, the node processor 30 schedules transmission by the transmitter of second type system information over the radio interface. The request by the wireless terminal 26 may arise after the wireless terminal 26 receives the node-available system information message NASIM 59, which advises of the value tag for the

node-available system information. Thus, in the Fig. 5 embodiment and mode, the value tag is associated with the second type system information.

[00070] Fig. 6 shows an exemplary message flow for the embodiment of Fig. 5. In the Fig. 6 message flow, when a wireless terminal enters the coverage area of the radio access node 22, the wireless terminal first receives from the radio access node 22 the *Essential System Information* (i.e., first type of system information (1TYP SIB), and in particular receives *Essential System Information* periodically broadcasted in messages containing the essential SIB(s) as information elements. The periodic broadcast by the radio access node 22 of the *Essential System Information* is shown by messages 6-1a and 6-1b of Fig. 6, it being understood (in Fig. 6 and other similar drawings) that there may be more than two such broadcast messages. An example *Essential System Information* message for the Fig. 5 embodiment and mode is shown in Fig. 7 and hereinafter described.

[00071] As shown in Fig. 7, the Essential System Information message may comprise a *nonEssentialSIBInfo* information element which includes the identification of the non-essential SIBs. If the *nonEssentialSIBInfo* information element is not present in the message, or if the information element is present but the list is empty, the wireless terminal assumes that all the SIBs from this radio access node 22 are essential SIBs.

[00072] Upon receiving the *Essential System Information*, i.e., the first type of system information (1TYP SIB), the wireless terminal 26 initiates the system access procedure by sending an *Access Request* message 6-2, which is acknowledged by radio access node 22 with an *Access Response* message 6-3. Following the system access procedure (comprised of the acts just described), the wireless terminal 26 sends a *Non-essential System Information Request* message 6-4 to radio access node 22. The *Non-essential System Information Request* message 6-4 may be generated by 2TYP SIG request generator 70 of Fig. 5, and may include an indication of one or more pieces of second type of system information (2TYP SIB), e.g., one or more SIB numbers (SIB#), that the wireless terminal 26 desires. The wireless terminal 26 was made aware of the existence of the second type of system information by the *non-essentialSIBinfo* information element. Such indication of desired SIB# may be expressed in an information element of the *Non-essential System Information Request* message 6-4. The *Non-*

essential System Information Request message 6-4 may be sent using uplink dedicated resources (e.g., radio resources of a frame).

[00073] In response to the *Non-essential System Information Request* message 6-4, the radio access node 22 may send *Non-essential System Information Response* message 6-5 using the downlink dedicated resources. The *Non-essential System Information Response* message 6-5 comprises the requested SIB#n (e.g., the SIB#n requested by the wireless terminal 26). The requested SIB#n may be included in an information element of the *Non-essential System Information Response* message 6-5. Afterwards, when the wireless terminal 26 has successfully obtained the requested SIB#n from the *Non-essential System Information Response* message 3-5, the wireless terminal 26 may send to the radio access node 22 a *Non-essential System Information Completion* message 6-6, at which point the radio access node 22 may release the uplink/downlink dedicated resources. Alternatively, the radio access node 22 may release the uplink/downlink dedicated resources after sending *Non-essential System Information Response* message 6-5.

[00074] An example *Essential System Information* message for the Fig. 5 embodiment and mode is shown in Fig. 7. In the embodiment and mode of Fig. 5 and Fig. 6, one or more and preferably a non-essential (e.g., second type) SIB is associated with a value tag that uniquely identifies a specific version of content for that SIB. When broadcasting *Essential System Information* message, the radio access node 22 of Fig. 5 includes the value tags for the latest contents of non-essential SIBs. Further, the value tag changes when any configuration parameters in the corresponding SIB gets updated. In one example implementation, the value tag is incremented by one upon the SIB update. Other types of modifications, e.g., decrementation, version prefixes or suffixes, may be employed.

[00075] Fig. 7 shows an example format of the *Essential System Information* message, wherein the *nonEssentialSIBInfo* information element each *sibId* is paired with *valueTag*, the value tag of the corresponding non-essential SIB. Thus, in an example implementation, the node-available system information message NASIM 59 may be an *Essential System Information* message as shown in Fig. 7. Fig. 7 particularly shows that the *Essential System Information* message may also, when functioning as the node-available system information

message NASIM 59, include an information element specifying what non-essential SIBs are available at this radio access node 22 upon request. Fig. 7 shows the *essentialSystemInformation* information element carrying at least one essential SIB and a *nonEssentialSIBInfo* information element may include a list of identifiers (*sibId*'s) for such available non-essential SIBs. In addition, for one or more and preferably each non-essential SIBs a value tag is provided in the *nonEssentialSIBInfo* information element.

[00076] Fig. 7 also shows that Essential SIB(s) may be also associated with at least one value tag, which is different from the ones for non-essential SIBs, and may be conveyed as a part of the *Essential System Information* message.

[00077] In certain example embodiments and modes, the value tag of a non-essential SIB may be valid within one radio access node 22, e.g., valid within a coverage area or cell served by the radio access node 22. But in other example embodiments and modes, the value tag may have collective applicability, e.g., be capable of expressing a value for more than one cell, for more than one piece of system information (e.g., more than one SIB), etc. In other words, the applicable "base" of the value tag, the information to which the value tag pertains, may be selectively defined in terms of various factors such as area, number of SIBs, and so forth.

[00078] In the above regard, in an example embodiment and mode shown in Fig. 8, the system information (SI) generator 54 includes not only the value tag generator 57, but also logic, memory, or controller for a value tag base definition 80. In an example implementation, for example, the value tag base definition 80 may specify that the value tag is valid in at least one geographical area comprising a plurality of radio access nodes. Thus, the node processor 30 may generate the value tag to be valid in a geographical area served by the access node and a group of at least one other access node. In such example implementation, the value tag base definition 80, or value tag "validity area", may be separately signaled from the radio access nodes to the wireless terminals in their respective coverage areas. That is, the node processor 30 may generate a signal (such as signal 8-1 of Fig. 8) to define the group of other access nodes.

[00079] Thus, in the Fig. 8 embodiment and mode, a wireless terminal may consider a non-essential system information, a second type SIB, to be "current" if (1) it was received in the validity area of the radio access node upon which the wireless terminal is camping; (2) the value tag of the received non-essential SIB is the same as the one that the camped radio access node is currently advertising in the *Essential System Information* message, and (3) it was received within a pre-determined or network-configured time period from the present time.

[00080] Fig. 9 shows an example message flow for the example embodiment and mode of Fig. 8. In the example embodiment and mode of Fig. 8 it is assumed that the wireless terminal 26 makes an on-demand request for second type system information (SI). Accordingly, in Fig. 9, the *Essential System Information* messages 9-1a and 9-1b are indicated as being "SIB#n: on-demand". Further, as explained above, the *Essential System Information* messages 9-1a and 9-1b may include the value tag ("valueTag: m"). After receiving the *Essential System Information*, the wireless terminal 26 may perform an access procedure comprising *Access Request* message 6-2 and *Access Response* message 6-3.

[00081] In the Fig. 9 scenario the wireless terminal 26 may not need to take further action respecting the second type of system information if the wireless terminal 26 has previously received the SIB#n and the value tag for the previously-received SIB#n as stored at the wireless terminal 26 is current (e.g., is "m"). Otherwise, if the wireless terminal 26 has a value tag for the SIB#n which is older than "m", the wireless terminal 26 may proceed to request the SIB#n transmission using the Non-Essential System Information Request message 6-4, in a manner similar to that described in a previous embodiment.

[00082] Thus, in the example embodiment and mode of Fig. 8 and fig. 9, the *Non-essential System Information Response* message and/or *Non-essential System Information Completion* message may contain the value tag with the current value (*valueTag* = m).

[00083] In an example embodiment and mode shown in Fig. 10, the wireless terminal 26 may optionally include in request message 10-1 (requesting the second type system information) the stored values tags of the requested second type system information. This may occur in a situation in which the wireless terminal 26 already has stored values for the second

type system information and already has stored value tags for the stored second type system information, but the wireless terminal 26 does not know if the stored second type system information is or is not truly current in terms of network usage for each of the stored SIBs of the second type system information. The wireless terminal 26 may request second type system information for plural different second type system information SIBs, and the plural second type system information SIBs may each have different value tags.

[00084] In the example embodiment and mode of Fig. 10, the wireless terminal 26 comprises value tag inserter functionality 84, which includes in the request message 10-1 the stored value tag for the second type system information already stored at wireless terminal 26. Moreover, as understood below, the radio access node 22 and SIB delivery controller 58 in particular may comprise a compression formatter for the second type system information, e.g., 2TYPSIB compression formatter 86.

[00085] Thus, the Fig. 10 example embodiment and mode is similar to the embodiment and mode of Fig. 8, but the wireless terminal 26 may optionally include in the *Non-essential System Information Request* message 10-1 the value tags of the requested non-essential SIBs, where the wireless terminal 26 obtained those value tags when it previously received the corresponding non-essential SIBS.

[00086] An exemplary scenario of the Fig. 10 embodiment and mode is illustrated in the message flow of Fig. 11. Fig. 11 shows, by the *Non-essential System Information Request* message 11-4 (which corresponds to message 10-1 of Fig. 10), that valueTag = k for its requested SIB#n. Based on this received value tag, the radio access node 22 and the 2TYPSIB compression formatter 86 in particular may compose "compressed" content of the SIB#n to be delivered via *Non-essential System Information Response* message 11-5.

[00087] In one example implementation of Fig. 10 and Fig. 11, the compressed content comprises the differences between the current SIB#n (*valueTag* = m) and the previously transmitted (*valueTag* = k). For example, if SIB#n consists of parameters *p1* to *p10* and if only *p3* and *p7* have been updated (if the radio access node 22 has newer values only for parameters

P3 and p7 of second type system information), the compressed content of the *Non-essential System Information Response* message 11-5 may include only *p3* and *p7* with updated values.

[00088] Thus the example embodiment and mode of Fig. 10 and Fig. 11 is particularly but not exclusively applicable to situations in which the second type system information comprises plural parameters and the receiver is configured to receive a wireless terminal-reported value tag in the request message. Basic example acts performed by radio access node 22 in conjunction with the example embodiment and mode of Fig. 10 and Fig. 11 are shown in Fig. 12. Act 12-1 comprises the node processor 30 (and system information (SI) generator 54 in particular) changing the value tag when at least one of the plural parameters of the second type system information changes and to store a parameter identifier for the at least one of the plural parameters for which content changes. Act 12-2 comprises making a comparison of the terminal-reported value tag (e.g., the value tag reported in the request message 10-1) with the value tag (the changed value tag). Act 12-3 comprises preparing the response message (e.g., the *Non-essential System Information Response* message 11-5) to include only changed ones of the plural parameters based on the comparison of the value tag relative to the terminal-reported value tag.

[00089] In some cases, the radio access node 22 may have an option to send the non-compressed versions of the requested non-essential SIBs even if the *Non-essential System Information Request* message contains value tags. One example of such cases is where the radio access node 22 no longer stores the contents of the previously transmitted non-essential SIBs indicated by the received value tags.

[00090] Basic example acts performed by wireless terminal 26 in conjunction with the example embodiment and mode of Fig. 10 and Fig. 11 are shown in Fig. 13. Act 13-1 comprises the wireless terminal 26 transmitting the terminal-stored value tag in the request message (e.g., in message 11-4). Act 13-2 comprises the wireless terminal 26 receiving the response message (e.g., message 11-5) from the access node. As mentioned above, the response message includes changed ones of the plural parameters based on a comparison at the access node of the node-reported value tag relative to the terminal-stored value tag. Act 13-3 comprises the wireless terminal 26 using the changed ones of the plural parameters of the

system information to replace corresponding parameters of the terminal-stored system information.

[00091] In the above regard, the wireless terminal 26 may construct the entire SIB#n using the received compressed content and the content of SIB#n saved in its memory. In the example described above, the wireless terminal 26 may overwrite saved *p3* and *p7* with the ones received in the compressed content. The UE further updates the saved value tag for SIB#n to *valueTag* = m.

[00092] In typical deployments, the content of system information is stable and even if it has some updates those updates are generally minor. By the approach described in the example embodiment of Fig. 10 and Fig. 11, it is possible to reduce the data size of the *Non-essential System Information Response* message.

[00093] The example embodiment and mode of Fig. 14 is similar to the embodiment and mode of Fig. 8, but differs in that a value tag may represent a value or version for an aggregation of multiple non-essential SIBs, e.g., a group of second type system information blocks. In particular, the value tag base definition 80(14) of the embodiment and mode of Fig. 14 defines multiple *sibId*s associated with one *valueTag* to thereby form a non-essential or second type system information SIB "group". Thus, in the Fig. 14 embodiment and mode, the node processor 30 generates the value tag to be associated with a group of plural second type system information blocks. The 2TYP SIG request generator 70 of the wireless terminal 26 of Fig. 14 includes a group identifier inserter ("group ID inserter 88") which includes, in a request message 14-1, an identification of the group of second type system information blocks which are the subject of a second type system information request. The request message 14-1 also may include a value tag associated with the group.

[00094] Fig. 15 shows an exemplary format of the *Essential System Information* message, where multiple *sibId*s associated with one *valueTag* forms a non-essential SIB group. The *valueTag* in each non-essential SIB group of this message is updated when the content of at least one non-essential SIB belonging to this group changes. In one configuration, each non-

essential SIB group may be associated with *groupIdx*, an index of the group in the order of occurrence in the *nonEssentialSIBInfo*.

[00095] Fig. 16 illustrates an example message flow for the embodiment and mode of Fig. 14. Fig. 14 particular shows *Essential System Information* messages 16-1a and 16-1b as advertising a non-essential SIB group with *groupIdx* = *a* and *valueTag* = *m*. The wireless terminal 26, when requesting the contents of the non-essential SIBs belonging to the group, sends to radio access node 22 the *Non-essential System Information Request* message 16-4 containing *groupId* = *a*. In response, the radio access node 22 sends *Non-essential System Information Response* message 16-4 including the contents of all the non-essential SIBs of the group defined by *groupid=a*.

[00096] As explained above, the example embodiment and mode of Fig. 14 and Fig. 16 involves, e.g., generating the value tag to be associated with a group of plural second type system information blocks. Basic example acts performed by radio access node 22 in conjunction with the example embodiment and mode of Fig. 14 and Fig. 16 are shown in Fig. 17. Act 17-1 comprises changing the value tag when content changes for at least one block of the group and storing a block identifier for the at least one block for which content changes. Act 17-2 comprises receiving a wireless terminal-reported value tag in the request message. Act 17-3 comprises making a comparison of the terminal-reported value tag with the value tag. Act 17-4 comprises preparing the response message to include only changed ones of the plural blocks of the group based on the comparison of the value tag relative to the terminal-reported value tag.

[00097] Basic example acts performed by wireless terminal 26 in conjunction with the example embodiment and mode of Fig. 14 and Fig. 16 are shown in Fig. 18. Act 18-1 comprises transmitting an identification of a group of second type system information blocks and the associated value tag in the request message (e.g., in message 16-4 of Fig. 16). Act 18-2 comprises receiving the response message (e.g., message 16-5 of Fig. 16) from the access node, the response message including changed ones of the plural blocks of the group based on the comparison of the node-transmitted value tag relative to the terminal-stored value tag. Act

18-3 comprises using the changed ones of the plural blocks of the group based of the system information to replace corresponding blocks of the terminal-stored system information.

[00098] Another example embodiment and mode, having message flow represented by Fig. 19, is based on the combination of the content compression method disclosed in the embodiment of Fig. 10 and the concept of non-essential SIB group described in the embodiment of Fig. 14. In the message flow of Fig. 19, the wireless terminal 26 sends *Non-essential System Information Request* message 19-4 with *groupIdx* = *a*, since the value tag that UE saves for this non-essential SIB group is not current. The *Non-essential System Information Response* message 19-5 that the radio access node 22 sends in response contains compressed content of the non-essential SIB group. In one implementation, the compressed content comprises the differences between the current non-essential SIBs (*valueTag* = m) and the previously broadcasted non-essential SIBs(*valueTag* = k) under the same non-essential SIB group.

[00099] Fig. 20 illustrates another signaling message flow for another example embodiment and mode. The initial messages of Fig. 20 are similar to those of some preceding embodiments and modes, but in Fig. 20 the *Non-essential System Information Response* message 20-5 includes an information element 78 indicating that the requested SIB#n will be broadcasted instead of unicasted. The radio access node 22, at a subsequent cycle of an *Essential System Information* message transmission (e.g., at message 20-6a), starts including at least one information element (such as information element 80) for the scheduling information of SIB#n transmissions. Based on this scheduling information, the radio access node 22 broadcasts the *Non-essential System Information* message 20-7a containing the requested SIB#n. As indicated by the messages depicted in broken lines in Fig. 20, the radio access node 22 may repeat these two steps multiple times for reliable delivery. By receiving at least one of these repetitions, the wireless terminal 26 should successfully obtain the SIB#n. The number of the repetitions may be determined by the radio access node 22, and information indicating the number may be broadcasted together with the essential system information. Alternatively, the number of the repetitions may be determined by the wireless terminal 26 and may be notified to the radio access node 22 through the *Non-essential System Information Request* message 20-4.

[000100] In some implementations of the example embodiment and mode of Fig. 20 the access node 22 may include a value tag(s) in messages, such as in the Essential System Information message(s) 20-6 of Fig. 20. Likewise, in some example implementations the broadcasted *Non-essential System Information* message(s) 20-7 may comprise a value tag that represents the version of the non-essential SIB(s) delivered by the *Non-essential System Information* message(s). In this regard, Fig. 21 shows one exemplary format of the *Essential System Information* with the scheduling information, where the *SchedulingInfo* optional information element is used for indicating the broadcast schedules for *Non-essential System Information* message with the updated SIB#n content.

[000101] A benefit of the Fig. 20 embodiment and mode is that the requested SIB#n may also be received by other wireless terminals entering the same coverage area. Such wireless terminals may receive the *Essential System Information* message 20-6 and know that the SIB#n is scheduled to be transmitted. As a result, the number of transmissions for *Non-essential System Information Request* message 20-4 may be reduced. An additional benefit is that the transmissions of messages 20-2 and 20-3 may also be reduced.

[000102] Fig. 22 illustrates yet another signaling message flow for another example embodiment and mode. The initial messages of Fig. 22 are similar to those of some preceding embodiments and modes, but in Fig. 22 the broadcasts of SIB#n in the *Non-essential System Information* message(s) 22-6 occur on pre-determined resource allocations. For example, the pre-determined resource allocations may be defined by using a periodicity and/or an offset. The radio access node 22 may optionally repeat sending *Non-essential System Information* messages 22-6 at multiple occasions. The wireless terminal 26 that has sent a *Non-essential System Information Request* message 22-4, requesting the SIB#n, may receive *Non-essential System Information* on at least one pre-determined radio resource allocation, without receiving an *Essential System Information* message. The radio access node 22 may use these allocated resources for other purposes if it does not transmit SIB#n.

[000103] In the Fig. 22 embodiment and mode, any other wireless terminal entering the coverage first receives the *Essential System Information* message 22-1, then it may monitor pre-determined resources for several times before sending *Non-essential System Information*

Request message 22-4, in order to suppress unnecessary transmissions of *Non-essential System Information Request* message. The number of monitoring trials may be pre-determined, or may be configured by the *Essential System Information* message.

[000104] In addition, in the Fig. 22 embodiment and mode the pre-determined resource allocations can be configurable by including the information of allocations in *Essential System Information* message 22-1. The pre-determined resource allocations of a given non-essential SIB may be jointly coded with whether the non-essential SIB is available at this radio access node by request. Alternatively, the pre-determined resource allocations may be tied to the SIB indices.

[000105] Fig. 23 illustrates yet another signaling message flow for another example embodiment and mode. In Fig. 23, the *Access Request* message(s) 23-2 now contain(s) a request for the SIB#n broadcast. The radio access node that receives the request may decide to deliver the SIB#n by unicast, or by broadcast. In case of unicast, it includes an information element of unicast indication for SIB#n in *Access Response* message 23-3, as shown in Fig. 23. Otherwise, the radio access node includes an information element of a broadcast indication for SIB#n in *Access Response* message 24-3, as shown in Fig. 24. An alternative approach to Fig. 24 is shown in Fig. 25, where *Non-essential System Information* message 25-5 is broadcasted on pre-determined resource allocations.

[000106] Further information regarding the technology disclosed herein, including but not limited to the example embodiments and modes of Fig. 20 – Fig. 25, is provided in related US Provisional Application 62/367.447, entitled "ON-DEMAND SYSTEM INFORMATION FOR WIRELESS TELECOMMUNICATIONS", filed on July 27, 2016.

[000107] In certain example embodiments and modes described above, if the access node 22 updates the content of a non-essential SIB, a new value of the value tag for the SIB will be used, e.g., in the Essential System Information message. In one example implementation, the value tag may be incremented (e.g., incremented by one). The wireless terminals under the coverage of the access node 22 may (1) eventually receive the message with the new value tag,

(2) find out that the previously received SIB becomes obsolete, and (3) decide to send a Non-essential System Information Request message to the access node 22.

[000108] Fig. 26 illustrates certain example embodiments and modes which seek to avoid congestion that may occur if many Non-essential System Information Request messages are transmitted from wireless terminals. In particular, the example embodiment and mode of Fig. 26 allows the access node 22 to broadcast the new content of the non-essential SIB for limited times after the SIB update. The broadcast-after-update technology of Fig. 26 may be utilized in conjunction/combination with any other of the example embodiments and modes described herein.

[000109] Fig. 26 shows node processor 30, and SIB generator 54 in particular, as comprising SIB update functionality 120. The SIB update functionality 120 either updates/changes the second type system information or detects an update or change in the second type system information. The SIB delivery controller 58 comprises automatic second type system information broadcast-after-update generator 122. Whenever there is an update or other change for the second type system information as performed or detected by the SIB update functionality 120, the automatic second type system information broadcast-after-update generator 122 generates broadcast messages 26-1 including the new/updated content of the second type system information. The broadcast messages 26-1 including the new content of the second type system information continue only for a limited time, or a predetermined number of automatic-after-update broadcast messages.

[000110] Fig. 27 illustrates a message flow for an example scenario of the example embodiment and mode of Fig. 26. In the example scenario of Fig. 27, as shown by arrow 124 SIB#n gets updated (e.g., by SIB update functionality 120) and its value tag changes from m to m+1. From this moment the access node 22 starts including the new value tag m+1 for SIB#n in the Essential System Information message(s) 27-n. In addition, at least one transmission of the Essential System Information message(s) 27-n after the SIB#n update may include scheduling information to indicate one or plurality of broadcast schedules for the updated SIB#n content. Based on the scheduling information, the access node 22 broadcasts Non-essential System Information message(s) 27-m including the updated SIB#n content. As

indicated by the primed message suffixes in Fig. 27, the access node 22 may optionally transmit Essential System Information message(s) with the scheduling information and the Non-essential System Information message(s) with the SIB#n content multiple times, e.g., for a predetermined time period after the SIB#n update, for example. As further shown in Fig. 27, after the automatic broadcast-after-update messages 27-n and 27-m, the access node 22 may also broadcast the fact that the SIB#n update is available on demand, as indicated by message 27-p.

[000111] In the example embodiment and mode of Fig. 26 and Fig 27, the access node 22 may use the message format shown in Fig. 21 for the Essential System Information message with the scheduling information. The wireless terminals receiving this Essential System Information message may attempt to receive the scheduled Non-essential System Information message, instead of requesting on-demand delivery of the updated SIB#n. Once the scheduled broadcasts of the updated SIB#n content are completed, the wireless terminal may no longer use the optional information element.

[000112] Some communication systems may employ discontinuous reception (DRX), where the wireless terminals do not always monitor the periodic transmission of the Essential System Information message. In order to ensure that the wireless terminals under the coverage of the access node receive the automatic broadcast-after-update messages, the system in some implementations may use a separate signaling mechanism to trigger the reception of the Essential System Information message. One example is that the access node includes an indication in the Paging message for predetermined duration before transmitting the Essential System Information message 27-n.

[000113] The example embodiment and mode of Fig. 28 is based at least in part on the example embodiment and mode of Fig. 26 and at least in part on the example embodiment and mode of Fig. 14 wherein the access node 22 may employ the concept of non-essential SIB groups. In the Fig. 28 example embodiment and mode, the Non-essential System Information message which is automatically broadcasted after the SIB content update includes the contents of multiple SIBs grouped with the same value tag.

[000114] Fig. 28 shows the node processor 30 and the SIB generator 54 in particular as comprising not only the SIB update functionality 120 and the automatic second type system information broadcast-after-update generator 122, but also a value tag base definition logic 80(28) which defines multiple SIB groups associated with the value tag.

[000115] Fig. 29 shows example, representative, basic acts or steps performed by the radio access node 22 of Fig. 28. Act 29-1 comprises detecting or determining a change of content of the system information. Act 29-2 comprises, upon the detection or the determination of change of content of the system information, generating a broadcast of the updated system information over the radio interface. In the example embodiment and mode of Fig. 29, the change of content may be an update of the system information, and the changed or updated system information may in particular be second type system information. Moreover, the broadcast may be broadcast messages which are scheduled, with scheduling information for such broadcast being included in previous broadcast such as a node-available system information message. Such previous broadcast message may be, in at least some embodiments, can be an Essential System Information broadcast message. Moreover, in example implementation, the broadcast of the second type system information over the radio interface may occur only for a predetermined time, e.g., a predetermined number of such broadcasts.

[000116] Fig. 30 shows example, representative, basic acts or steps performed by the wireless terminal 26 of Fig. 28. Act 30-1 comprises receiving a broadcast message that includes scheduling information for updated second type system information for which the access node has determined occurrence of an update and wherein the node-transmitted value tag is an updated value tag associated with the updated second type system information. Act 30-2 comprises obtaining the updated second type information in accordance with the scheduling information. Act 30-3 comprises, on the basis of the updated value tag, determining not to request that the update second type system information be transmitted to the wireless terminal.

[000117] Fig. 31 shows an example of message flow for the example embodiment and mode of Fig. 28; Fig. 32 shows an example message format of the Essential System Information message for example embodiment and mode of Fig. 27 and Fig. 28.

[000118] Fig. 33 illustrates certain example embodiments and modes which allow the access node 22 to broadcast a "compressed" image of updated non-essential system information in conjunction with the automatic broadcast-after-update feature. The node processor 30 of access node 22, and the SIB generator 54 in particular, comprise both the SIB update functionality 120 and automatic second type system information broadcast-after-update generator 122, as well as 2TYPSIB compression formatter 86(31). Upon actual update or detection of update of system information by functionality 120, the broadcast-after-update generator 122 generates a compressed SIB broadcast-after-update message 33-1, in which compression is achieved by virtue of 2TYPSIB compression formatter 86(31) preferably including in the SIB broadcast-after-update message 33-1 only those system information parameters of the SIB block which have changed.

[000119] Fig. 34 shows an exemplary message flow for the embodiment and mode of Fig. 33. In Fig 32, the broadcasted Non-essential System Information message(s) 34-n now include(s) a compressed content of the updated SIB#n with valueTag = m+1. As described in a previous embodiment and mode, in one implementation the compressed content comprises the differences between the updated SIB#n (valueTag = m+1) and the previously transmitted (valueTag = m).

[000120] The wireless terminal 26 which receives the broadcasted Non-essential System Information message 34-n with the compressed SIB#n content with valueTag = m+1 checks if it has previously received SIB#n with valueTag = m and has saved the content in its memory. If so, the wireless terminal 26 simply applies the received compressed image to the saved content to construct the updated content. Otherwise, the wireless terminal 26 may initiate an on-demand delivery request of the updated SIB#n content using one or some of the methods already disclosed above.

[000121] Fig. 35 illustrates an example message flow for certain example embodiments and modes which applies the concept of non-essential SIB groups to the example compression embodiment and mode of Fig. 32 in conjunction with the automatic broadcast-after-update feature. In Fig. 35 the Essential System Information message 35-n advertises one or more groupIdx's, each of which is associated with a value tag valueTag, as disclosed in a previous

example embodiment and mode. Similar to a previous example embodiment and mode, the broadcasted Non-essential System Information message 35-m may contain compressed content of the non-essential SIB group. In one implementation, the compressed content comprises the differences between the current non-essential SIBs (valueTag = m+1) and the previously broadcasted (valueTag = m) under the same non-essential SIB group.

[000122] Certain units and functionalities of node 22 and wireless terminal 26 are, in example embodiments, implemented by electronic machinery, computer, and/or circuitry. For example, the node processors 30 and terminal processors 40 of the example embodiments herein described and/or encompassed may be comprised by the computer circuitry of Fig. 36. Fig. 36 shows an example of such electronic machinery or circuitry, whether node or terminal, as comprising one or more processor(s) circuits 140, program instruction memory 142; other memory 144 (e.g., RAM, cache, etc.); input/output interfaces 146; peripheral interfaces 148; support circuits 149; and busses 150 for communication between the aforementioned units.

[000123] The program instruction memory 142 may comprise coded instructions which, when executed by the processor(s), perform acts including but not limited to those described herein. Thus is understood that each of node processor 30 and terminal processor 40, for example, comprise memory in which non-transient instructions are stored for execution.

[000124] The memory 144, or computer-readable medium, may be one or more of readily available memory such as random access memory (RAM), read only memory (ROM), floppy disk, hard disk, flash memory or any other form of digital storage, local or remote, and is preferably of non-volatile nature. The support circuits 149 are coupled to the processors 140 for supporting the processor in a conventional manner. These circuits include cache, power supplies, clock circuits, input/output circuitry and subsystems, and the like.

[000125] The technology of this application thus encompasses but is not limited to the following example embodiments, example features, and example advantages:

[000126] Example Embodiment 1: A user equipment (UE) for receiving system information, comprising:

a processor; and

memory in electronic communication with the processor, wherein instructions stored in the memory are executable to:

receive first system information periodically broadcasted from eNB;

determine types of second system information to additionally receive, wherein each of said types corresponds to a second system information block;

transmit to the eNB a request containing said types of the second system information;

receive the requested second system information from the eNB.

[000127] Example Embodiment 2: The UE of Example Embodiment 1, wherein contents of one or plurality of second system information blocks are associated with a value tag.

[000128] Example Embodiment 3: The UE of Example Embodiment 2, wherein from said first system information the UE obtains value tags, each of which indicates the current version of the corresponding second information system blocks.

[000129] Example Embodiment 4: The UE of Example Embodiment 3, wherein the UE retrieves broadcast scheduling information of said second system information from said first system information.

[000130] Example Embodiment 5: The UE of Example Embodiment 4, wherein the UE receives the broadcasted second system information based on said scheduling information.

[000131] Example Embodiment 6: The UE of Example Embodiment 4, wherein the UE refrains from requesting delivery of second system information blocks if the first system information indicates broadcast delivery of said second system information

[000132] Example Embodiment 7: The UE of Example Embodiment 6, wherein the UE refrains from requesting delivery of second system information blocks if the first system information indicates broadcast delivery of said second system information and if the current value tag for these second system information blocks is different from the saved value tag for the same second system information blocks.

[000133] Example Embodiment 8: The UE of Example Embodiment 4, wherein the second system blocks associated with a same value tag is identified by a group index.

[000134] Example Embodiment 9: The UE of Example Embodiment 5, wherein the UE receives one or plurality of compressed contents based on said scheduling information, each of which is a compressed image of one or plurality of second system information blocks.

[000135] Example Embodiment 10: An evolved node B (eNB) for delivering system information, comprising:

a processor; and

memory in electronic communication with the processor, wherein instructions stored in the memory are executable to:

periodically broadcast first system information that includes types of second system information available by request, wherein each of said types corresponds to a second system information block;

receive from a UE a request for transmission of said second system information;

transmit said requested second system information.

[000136] Example Embodiment 11: The eNB of Example Embodiment 10, wherein contents of one or plurality of second system information blocks are associated with a value tag.

[000137] Example Embodiment 12: The eNB of Example Embodiment 11, wherein the eNB includes in said first system information value tags, each of which indicates the current version of the corresponding second information system blocks.

[000138] Example Embodiment 13: The eNB of Example Embodiment 12, wherein the eNB includes broadcast scheduling information of said second system information in said first system information.

[000139] Example Embodiment 14: The eNB of Example Embodiment 12, wherein the eNB broadcasts said seond system information based on said scheduling information.

[000140] Example Embodiment 15: The eNB of Example Embodiment 12, wherein the eNB includes broadcast scheduling information of said second system information in said first system information after the content of said second system information gets updated.

[000141] Example Embodiment 16: The eNB of Example Embodiment 15, wherein the inclusion of said broadcast scheduling information in the first system information is limited for pre-determined times after the content of said second system information gets updated.

[000142] Example Embodiment 17: The eNB of Example Embodiment 10, wherein the second system blocks associated with a same value tag is identified by a group index,

[000143] Example Embodiment 18: The eNB of Example Embodiment 11, wherein the eNB transmits one or plurality of compressed contents based on said scheduling information, each of which is a compressed image of one or plurality of second system information blocks.

[000144] Example Embodiment 19: An access node of a radio access network comprising:

processor circuitry configured:

upon a change of content of system information, to include, in a broadcast message comprising first system information which is broadcast from the access node, an indication of when the access node is scheduled to broadcast second system information which is not included in the first system information;

a transmitter configured to transmit, over a radio interface, the broadcast message comprising the first system information and thereafter the broadcast of the second system information according to the indication.

[000145] Example Embodiment 20: The access node of Example Embodiment 19, wherein the processor circuitry is further configured, upon the change of content of the system information, to generate multiple broadcasts of the second system information over the radio interface for a predetermined time.

[000146] Example Embodiment 21: The access node of Example Embodiment 19, wherein the processor circuitry is further configured, upon the change of content of the system information, to generate the broadcast of the second system information in a compressed format reflecting portions of the second system information that have changed content.

[000147] Example Embodiment 22: The access node of Example Embodiment 19, wherein the processor circuitry is further configured, upon the change of content of the system information, to generate the broadcast of the second system information, the broadcast of the second system information comprising an association of a group of system information blocks with a same value tag.

[000148] Example Embodiment 23: The access node of Example Embodiment 19, wherein the processor circuitry is further configured the broadcast of the second system information to comprise a value tag.

[000149] Example Embodiment 24: The access node of Example Embodiment 19, wherein the first type system information is periodically broadcasted by the transmitter and is required for initial access to the radio access network, and wherein the second type system information is not required for initial access to the radio access network.

[000150] Example Embodiment 25: A method in an access node of a radio access network comprising:

upon a change of content of system information, using processor circuitry to include, in a broadcast message comprising first system information which is broadcast from the access node, an indication of when the access node is scheduled to broadcast second system information which is not included in the first system information;

transmitting, over a radio interface, the broadcast message comprising the first system information and thereafter the broadcast of the second system information according to the indication.

[000151] Example Embodiment 26: The method of Example Embodiment 25, further comprising, upon the change of content of the system information, generating multiple broadcasts of the updated system information over the radio interface for a predetermined time.

[000152] Example Embodiment 27: The method of Example Embodiment 25, further comprising, upon the change of content of the system information, generating the broadcast of the updated system information in a compressed format reflecting portions of the second system information that comprise changed content.

[000153] Example Embodiment 28: The method of Example Embodiment 25, further comprising, upon the change of content of the system information, generating the broadcast of the updated system information, the node-available system information comprising an association of a group of system information blocks with a same value tag.

[000154] Example Embodiment 29: The method of Example Embodiment 25 further comprising the processor circuitry including a value tag in the broadcast of the second system information.

[000155] Example Embodiment 30: The method of Example Embodiment 25 wherein the first type system information is periodically broadcasted by the transmitter and is required for initial access to the radio access network, and wherein the second type system information is not required for initial access to the radio access network.

[000156] Example Embodiment 31: A wireless terminal which communicates over a radio interface with an access node of a radio access network comprising:

a receiver configured to receive messages from the access node including a first broadcast message and a second broadcast message;

processor circuitry configured to:

determine, from the first broadcast message, scheduling information concerning the second broadcast message;

obtain system information from the second broadcast message based on the scheduling information.

[000157] Example Embodiment 32: The wireless terminal of Example Embodiment 31, wherein the processor circuitry is further configured to:

obtain from the first broadcast message a value tag; and

determine not to request system information from the access node based on the value tag.

[000158] Example Embodiment 33: The wireless terminal of Example Embodiment 31, wherein:

the first broadcast message comprises first system information and the scheduling information, and

the second broadcast message comprises second system information that is not included in the first system information.

[000159] Example Embodiment 34: The wireless terminal of Example Embodiment 33, wherein the first type system information is periodically broadcasted by the transmitter and is required for initial access to the radio access network, and wherein the second type system information is not required for initial access to the radio access network.

[000160] Example Embodiment 35:The wireless terminal of Example Embodiment 31, wherein the receiver is further configured to attempt to receive the multiple second broadcast messages over the radio interface for a predetermined time.

[000161] Example Embodiment 36: The wireless terminal of Example Embodiment 31, wherein the processor circuitry is further configured to obtain updated system information included in the second broadcast message in a compressed format reflecting portions of the system information that have changed content.

[000162] Example Embodiment 37: The wireless terminal of Example Embodiment 31, wherein the processor circuitry is further configured to obtain updated system information included in the second broadcast message as a group of system information blocks having an associated updated value tag.

[000163] Example Embodiment 38: A method in a wireless terminal which communicates over a radio interface with an access node of a radio access network the method comprising:

receiving messages from the access node including a first broadcast message and a second broadcast message;

using processor circuitry to:

determine, from the first broadcast message, scheduling information concerning the second broadcast message;

obtain system information from the second broadcast message based on the scheduling information.

[000164] Example Embodiment 39: The method of Example Embodiment 38, wherein the processor circuitry is further configured to:

obtain from the first broadcast message a value tag; and

determine not to request system information from the access node based on the value tag.

[000165] Example Embodiment 40: The method of Example Embodiment 38, wherein:

the first broadcast message comprises first system information and the scheduling information, and

the second broadcast message comprises second system information that is not included in the first system information.

[000166] Example Embodiment 41: The method of Example Embodiment 40, wherein the first type system information is periodically broadcasted by the transmitter and is required for initial access to the radio access network, and wherein the second type system information is not required for initial access to the radio access network.

[000167] Example Embodiment 42: The method of Example Embodiment 38, further comprising attempting to receive multiple second broadcast messages over the radio interface for a predetermined time.

[000168] Example Embodiment 43: The method of Example Embodiment 38, further comprising obtaining the second broadcast system information in a compressed format reflecting portions of the system information that have changed content.

[000169] Example Embodiment 44: The method of Example Embodiment 38, further comprising obtaining the second broadcast system information as a group of system information blocks having an associated same value tag.

[000170] Although the processes and methods of the disclosed embodiments may be discussed as being implemented as a software routine, some of the method steps that are disclosed therein may be performed in hardware as well as by a processor running software. As such, the embodiments may be implemented in software as executed upon a computer system, in hardware as an application specific integrated circuit or other type of hardware implementation, or a combination of software and hardware. The software routines of the disclosed embodiments are capable of being executed on any computer operating system, and is capable of being performed using any CPU architecture. The instructions of such software are stored on non-transient computer readable media.

[000171] The functions of the various elements including functional blocks, including but not limited to those labeled or described as "computer", "processor" or "controller", may be provided through the use of hardware such as circuit hardware and/or hardware capable of executing software in the form of coded instructions stored on computer readable medium. Thus, such functions and illustrated functional blocks are to be understood as being either hardware-implemented and/or computer-implemented, and thus machine-implemented.

[000172] In terms of hardware implementation, the functional blocks may include or encompass, without limitation, digital signal processor (DSP) hardware, reduced instruction set processor, hardware (e.g., digital or analog) circuitry including but not limited to application specific integrated circuit(s) [ASIC], and/or field programmable gate array(s) (FPGA(s)), and (where appropriate) state machines capable of performing such functions.

[000173] In terms of computer implementation, a computer is generally understood to comprise one or more processors or one or more controllers, and the terms computer and processor and controller may be employed interchangeably herein. When provided by a computer or processor or controller, the functions may be provided by a single dedicated computer or processor or controller, by a single shared computer or processor or controller, or

by a plurality of individual computers or processors or controllers, some of which may be shared or distributed. Moreover, use of the term "processor" or "controller" shall also be construed to refer to other hardware capable of performing such functions and/or executing software, such as the example hardware recited above.

[000174] The functions of the various elements including functional blocks, including but not limited to those labeled or described as "computer", "processor" or "controller", may be provided through the use of hardware such as circuit hardware and/or hardware capable of executing software in the form of coded instructions stored on computer readable medium. Thus, such functions and illustrated functional blocks are to be understood as being either hardware-implemented and/or computer-implemented, and thus machine-implemented.

[000175] Nodes that communicate using the air interface also have suitable radio communications circuitry. Moreover, the technology can additionally be considered to be embodied entirely within any form of computer-readable memory, such as solid-state memory, magnetic disk, or optical disk containing an appropriate set of computer instructions that would cause a processor to carry out the techniques described herein.

[000176] It will be appreciated that the technology disclosed herein is directed to solving radio communications-centric issues and is necessarily rooted in computer technology and overcomes problems specifically arising in radio communications. Moreover, in at least one of its aspects the technology disclosed herein improves the functioning of the basic function of a wireless terminal and/or node itself so that, for example, the wireless terminal and/or node can operate more effectively by prudent use of radio resources.

[000177] Although the description above contains many specificities, these should not be construed as limiting the scope of the technology disclosed herein but as merely providing illustrations of some of the presently preferred embodiments of the technology disclosed herein. Thus the scope of the technology disclosed herein should be determined by the appended claims and their legal equivalents. Therefore, it will be appreciated that the scope of the technology disclosed herein fully encompasses other embodiments which may become obvious to those skilled in the art, and that the scope of the technology disclosed herein is

accordingly to be limited by nothing other than the appended claims, in which reference to an element in the singular is not intended to mean "one and only one" unless explicitly so stated, but rather "one or more." All structural, chemical, and functional equivalents to the elements of the above-described preferred embodiment that are known to those of ordinary skill in the art are expressly incorporated herein by reference and are intended to be encompassed by the present claims. Moreover, it is not necessary for a device or method to address each and every problem sought to be solved by the technology disclosed herein, for it to be encompassed by the present claims. Furthermore, no element, component, or method step in the present disclosure is intended to be dedicated to the public regardless of whether the element, component, or method step is explicitly recited in the claims. No claim element herein is to be construed under the provisions of 35 U.S.C. 112, sixth paragraph, unless the element is expressly recited using the phrase "means for."

WHAT IS CLAIMED IS:

1. An access node of a radio access network that communicates over a radio interface with a wireless terminal, the access node comprising:

processor circuitry configured:

to generate a first type system information block (SIB) comprising information and a value tags, the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network;

upon a change of a second type SIB whose associated information indicating that the second type SIB was provided on-demand before the change, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;

transmitter circuitry configured to:

transmit the first type SIB;

transmit a message that triggers the wireless terminal to receive the first type SIB, wherein;

whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

2. The access node of claim 1, wherein the transmitter circuitry is further configured to transmit the second type SIB by broadcast after the change.

3. A method for an access node of a radio access network that communicates over a radio interface with a wireless terminal, the method comprising:

generating a first type system information block (SIB) comprising information and a value tags, the information indicating whether one or more associated second type

system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network;

upon a change of a second type SIB whose associated information indicating that the second type SIB was provided on-demand before the change, including in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;

transmitting the first type SIB;

transmitting a message that triggers the wireless terminal to receive the first type SIB, wherein;

whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

4. The method of claim 3, further comprising transmitting the second type SIB by broadcast after the change.

5. A wireless terminal of a radio access network that communicates over a radio interface with an access node of the radio access network comprising:

receiver circuitry configured to receive a message that triggers reception of a first type system information block (SIB);

the receiver configured to receive, based on the reception of the message, the first type SIB comprising information and a value tag, the information indicating whether one or more associated second type SIBs are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being used to perform an initial access to the radio access network, and;

processor circuitry configured to determine that a second type SIB has changed, based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB, wherein;

the receiver circuitry is configured to perform reception of the second type SIB based on the information associated with the second type system information block, in a case that the second type SIB has changed.

6. A method for a wireless terminal of a radio access network that communicates over a radio interface with an access node of the radio access network, the method comprising:

receiving a message that triggers reception of a first type system information block (SIB);

receiving, based on the reception of the message, the first type SIB comprising information and a value tag, the information indicating whether one or more associated second type SIBs are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being used to perform an initial access to the radio access network, and;

determining that a second type SIB has changed, based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB, wherein;

reception of the second type SIB is performed based on the information associated with the second type system information block, in a case that the second type SIB has changed.

ABSTRACT OF THE DISCLOSURE

[000178] Method and apparatus use a value tag in conjunction with transmission and/or processing of system information in a wireless communication network, especially in conjunction with second type system information or non-essentially type system information. In certain example embodiment and modes, an access node (22) may initiate broadcasting second type system information when its content gets updated, in order to avoid many on-demand delivery requests from wireless terminals. In certain example implementations, the access node (22) may compress second type system information to be delivered by broadcast.

DAINGEAN_0001663

Electronic Patent Application Fee Transmittal

Application Number:	
Filing Date:	
Title of Invention:	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Filer:	H. Warren Burnam
Attorney Docket Number:	161083_1US_1035-1394

Filed as Large Entity

Filing Fees for Utility under 35 USC 111(a)

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Basic Filing:				
UTILITY APPLICATION FILING	1011	1	300	300
UTILITY SEARCH FEE	1111	1	660	660
UTILITY EXAMINATION FEE	1311	1	760	760
Pages:				
Claims:				
INDEPENDENT CLAIMS IN EXCESS OF 3	1201	1	460	460
Miscellaneous-Filing:				
Petition:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
		Total in USD ($)		**2180**

Electronic Acknowledgement Receipt

EFS ID:	37409412
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	H. Warren Burnam
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	09-OCT-2019
Filing Date:	
Time Stamp:	15:14:36
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	$2180
RAM confirmation Number	E201909F15118605
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Drawings-only black and white line drawings	161083_1US_1035-1394_drawings.pdf	592542 b3c1b1219d552a7930e532d0ec9591c7ac72b877	no	31
Warnings:					
Information:					
2	Oath or Declaration filed	161083_1US_1035-1394_dec_from_parent.pdf	33115 c0058d755e06fa29291feca1aca11fe86f80d8c1	no	1
Warnings:					
Information:					
3	Application Data Sheet	161083_1US_1035-1394_ADS.pdf	1256046 139f2ffedad335241fb82de270432d66f3e4c9aa	no	8
Warnings:					
Information:					
4	Power of Attorney	161083_1US_1035-1394_power_of_atty_ttransmittal.pdf	95331 269b775d5999fa18619b5d303c3fbed50ab7bc74	no	1
Warnings:					
Information:					
5	Power of Attorney	201804_SHARP_POA_NV_23117.pdf	105548 e9cb0c9bbdf3eddabf5620f28ae6c10b8c4880c4	no	1
Warnings:					
Information:					
6	Assignee showing of ownership per 37 CFR 3.73	161083_1US_1035-1394_373c_statement.pdf	84926 5b933a63095ec641c61e761e21b7903d04bebbc0	no	1
Warnings:					
Information:					

7	Transmittal of New Application	161083_1US_1035-1394_cont_app_transmittal.pdf	69630 d817402cc17919f40aa6cf080ba50518b14c8e3a	no	2
Warnings:					
Information:					
8		161083_1US_1035-1394_ids_1449.pdf	152686 0bb23fd9e6adfba32d929d3d5810c5806e5a1ea9	yes	3

	Multipart Description/PDF files in .zip description		
	Document Description	**Start**	**End**
	Transmittal Letter	1	1
	Information Disclosure Statement (IDS) Form (SB08)	2	3

Warnings:					
Information:					
9		161083US_1035-1394_cont_app_2019_October_9.pdf	265261 c009c694f07bf1fd95ab7ae64cc7dad13c1185ce	yes	45

	Multipart Description/PDF files in .zip description		
	Document Description	**Start**	**End**
	Specification	1	41
	Claims	42	44
	Abstract	45	45

Warnings:					
Information:					
10	Fee Worksheet (SB06)	fee-info.pdf	36946 89f062000238ba87527eda42af06e7bdb328717f	no	2
Warnings:					
Information:					
			Total Files Size (in bytes):	2692031	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

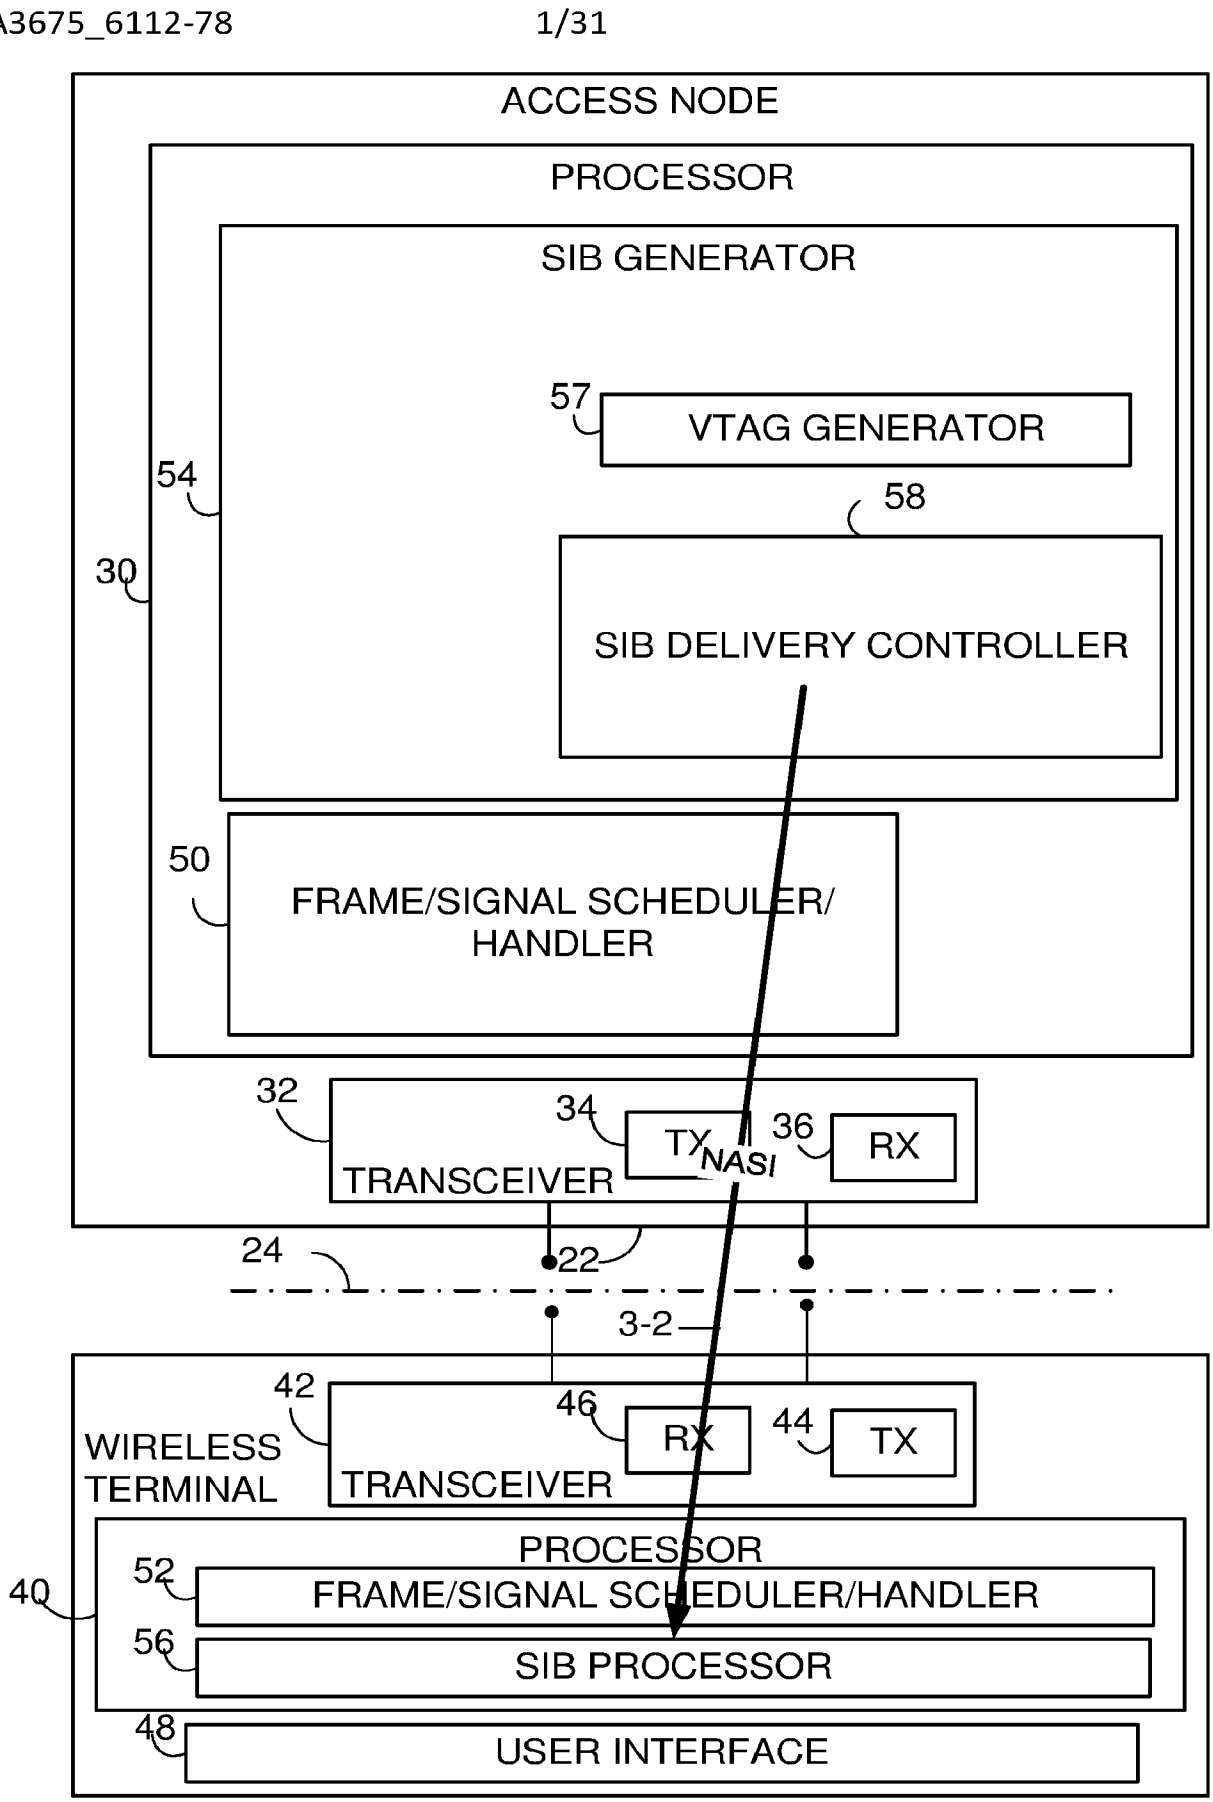

20
ACCESS NODE
PROCESSOR
SIB GENERATOR
57
VTAG GENERATOR
54
58
30
SIB DELIVERY CONTROLLER
50
FRAME/SIGNAL SCHEDULER/
HANDLER
32
34
TX
36
RX
NASI
TRANSCEIVER
24
22
3-2
42
46
RX
44
TX
WIRELESS
TERMINAL
TRANSCEIVER
PROCESSOR
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
48
USER INTERFACE

Fig. 1

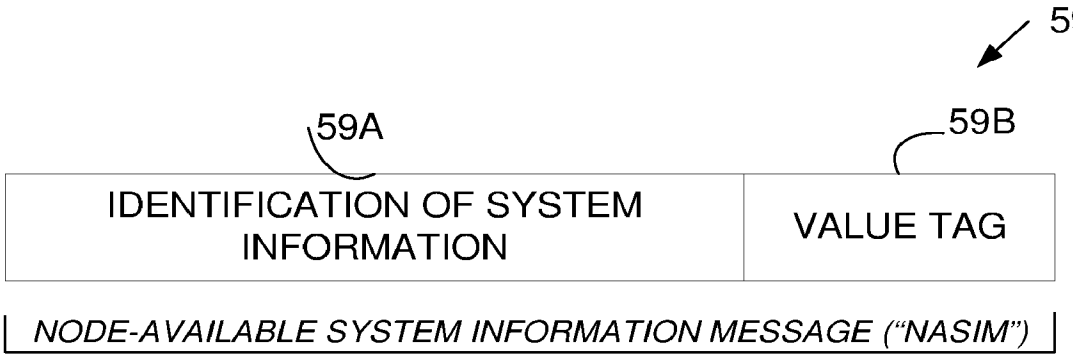


Fig. 2

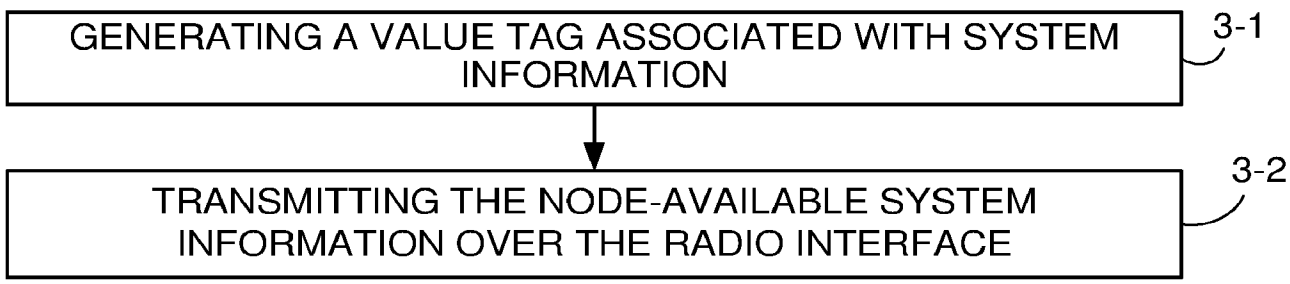


Fig. 3

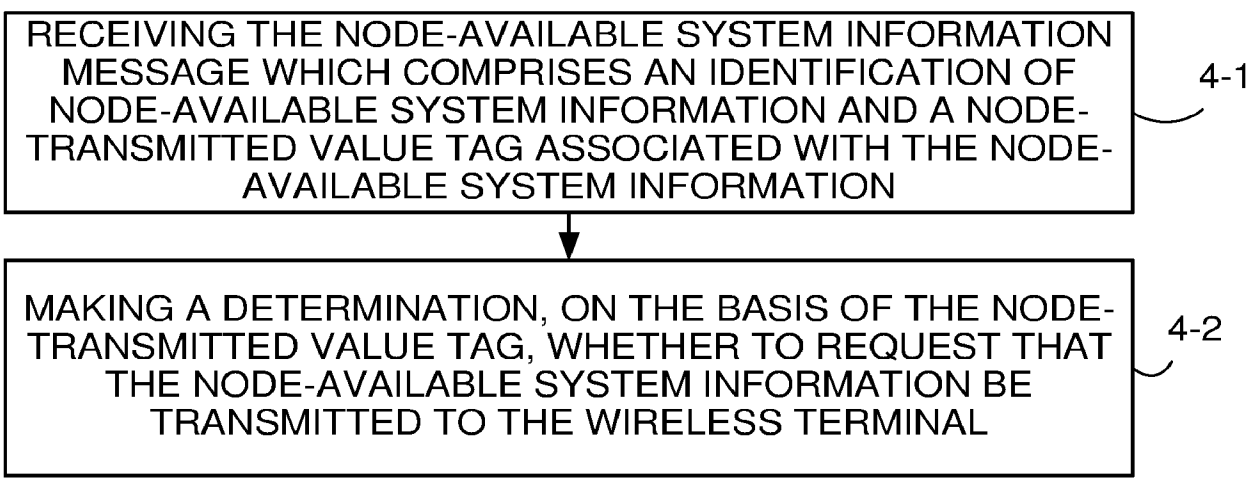


Fig. 4

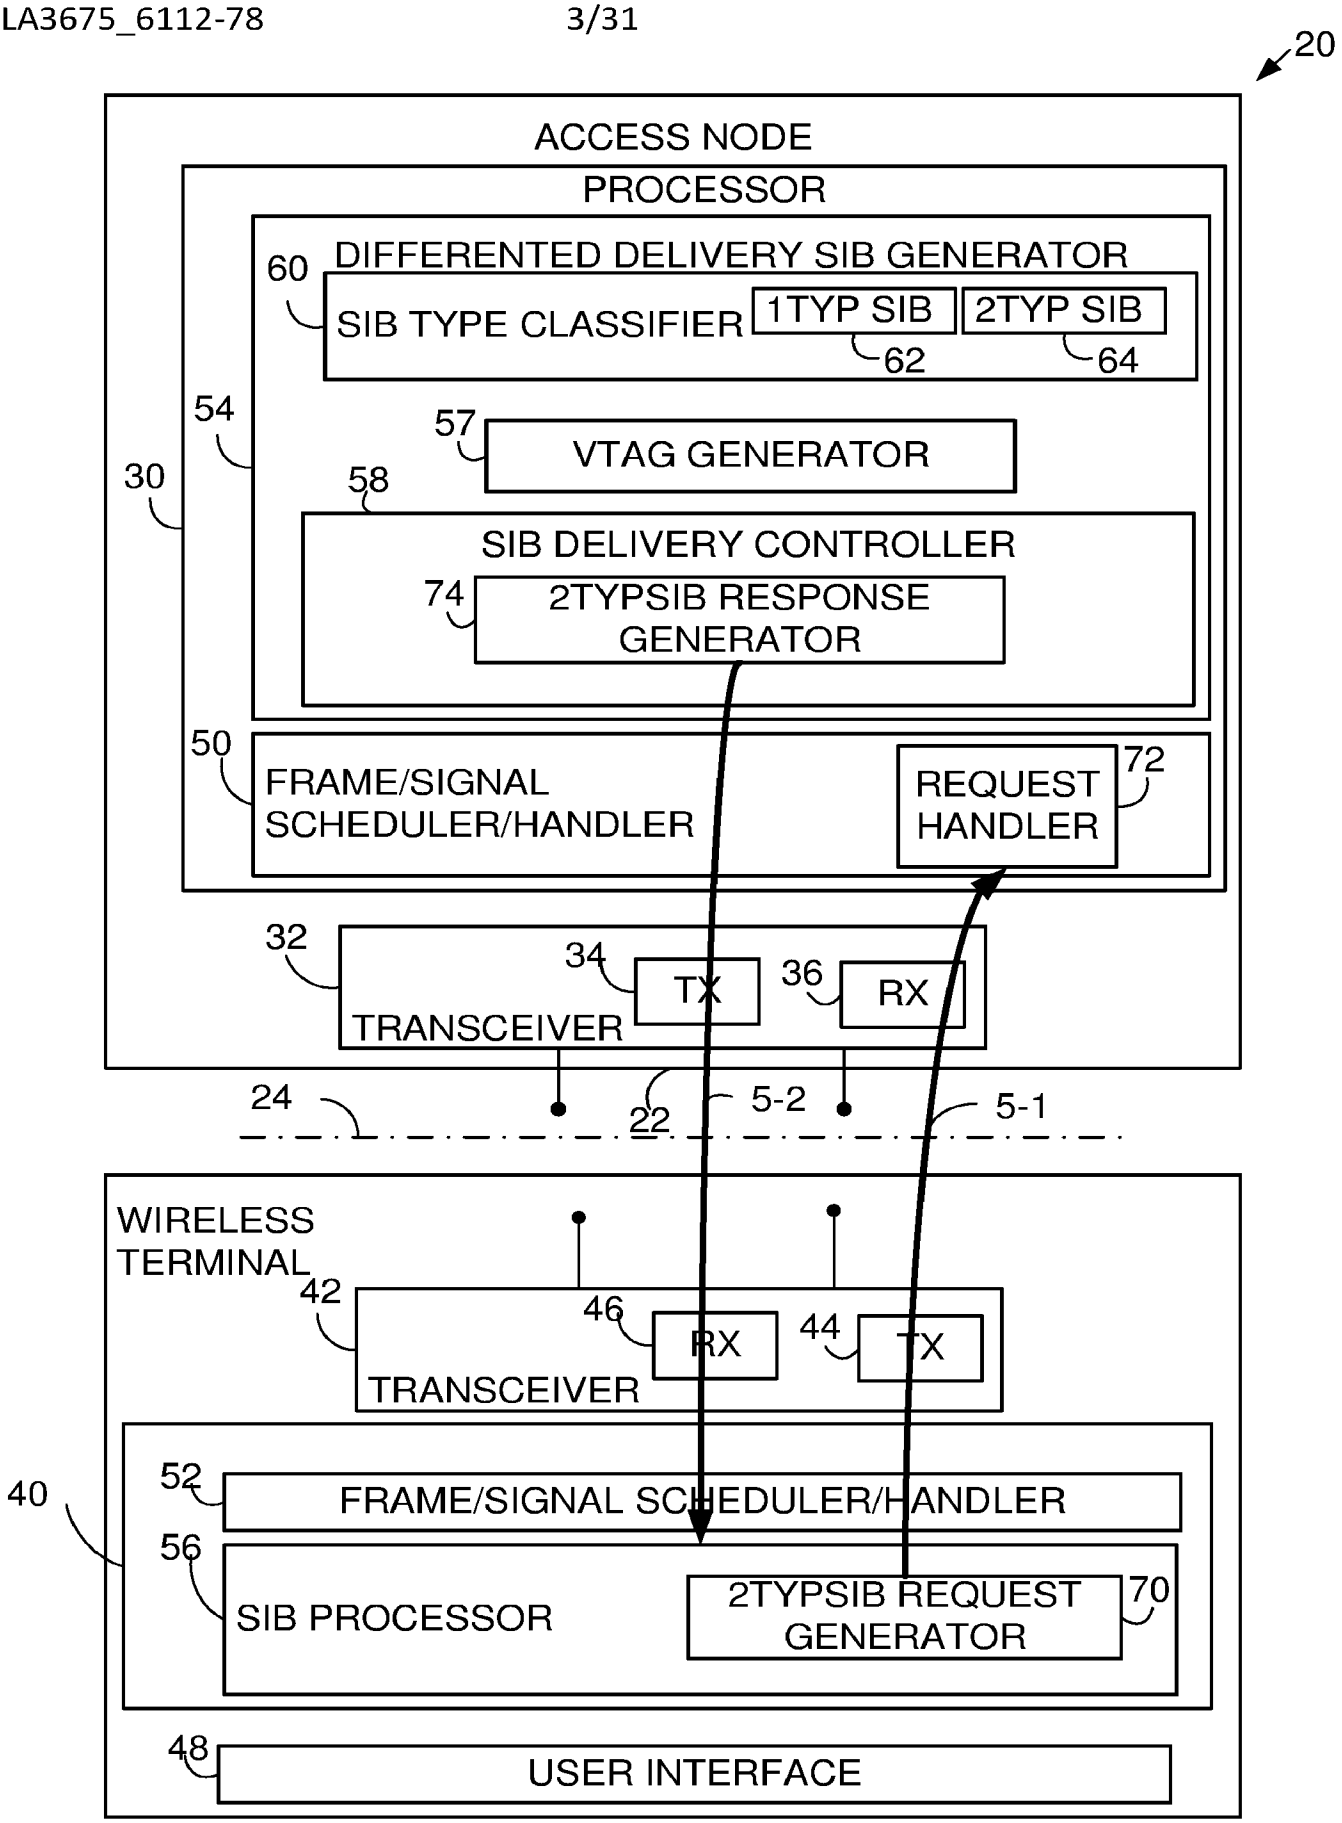

20
ACCESS NODE
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
54
57
VTAG GENERATOR
30
58
SIB DELIVERY CONTROLLER
74
2TYPSIB RESPONSE GENERATOR
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
22
5-2
5-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
70
48
USER INTERFACE

Fig. 5

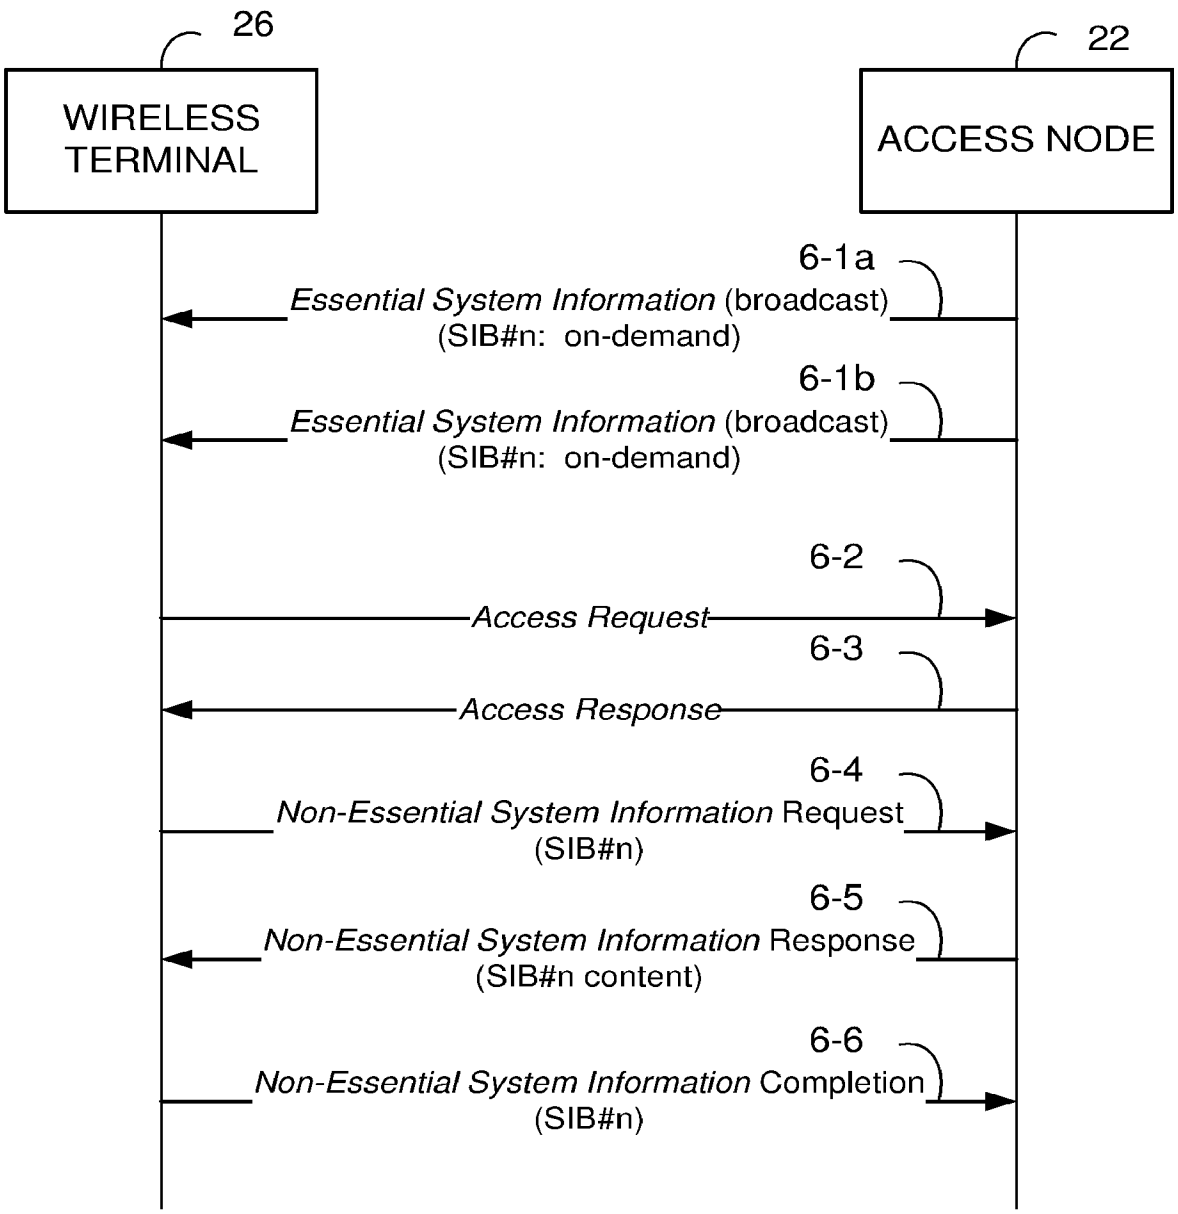

26
WIRELESS TERMINAL
22
ACCESS NODE
6-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
6-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
6-2
Access Request
6-3
Access Response
6-4
Non-Essential System Information Request
(SIB#n)
6-5
Non-Essential System Information Response
(SIB#n content)
6-6
Non-Essential System Information Completion
(SIB#n)

Fig. 6

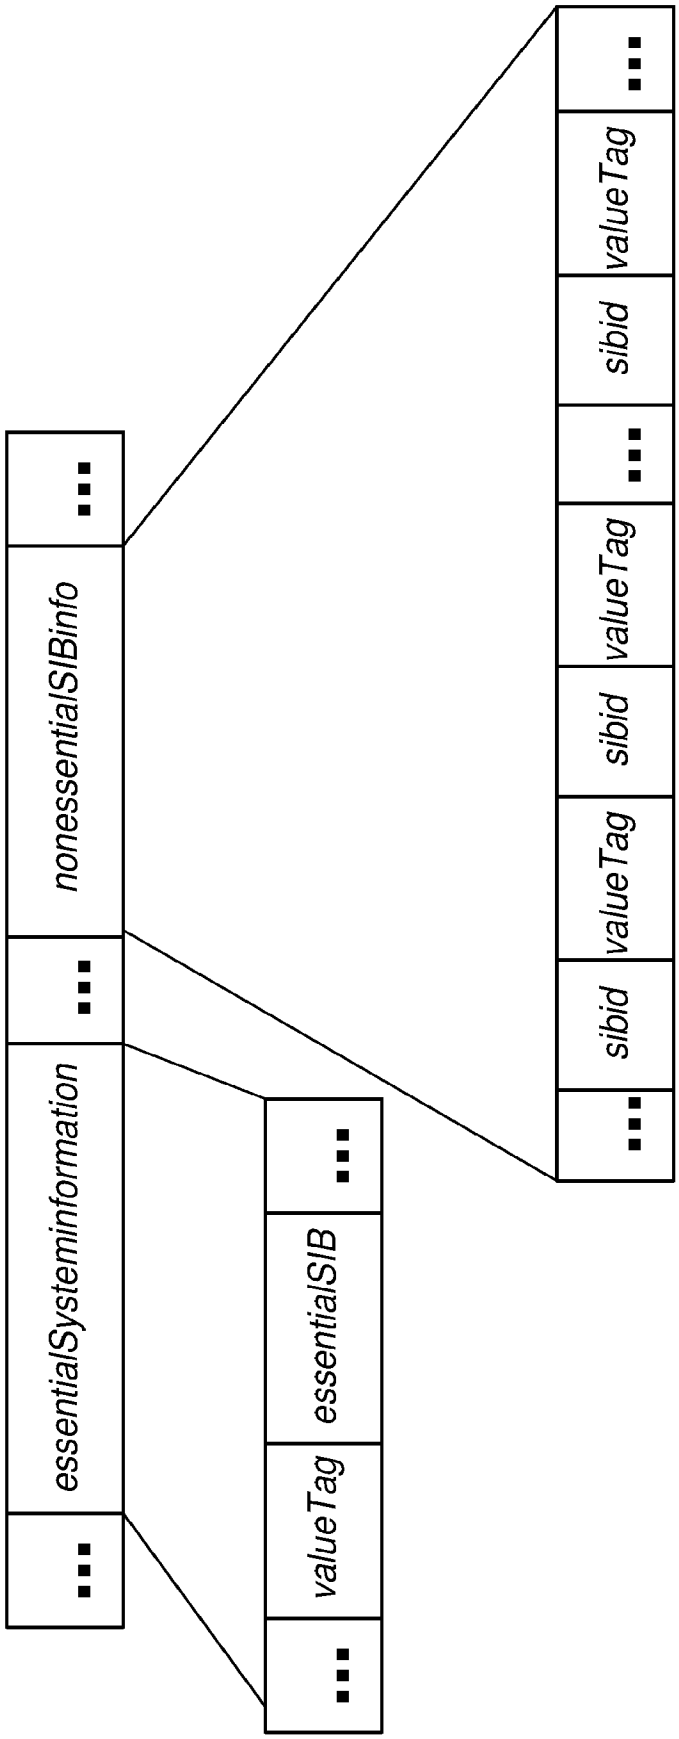

...
nonessentialSIBinfo
...
essentialSysteminformation
...
valueTag
essentialSIB
...
...
sibid
valueTag
sibid
valueTag
...
sibid
valueTag
...

Fig. 7

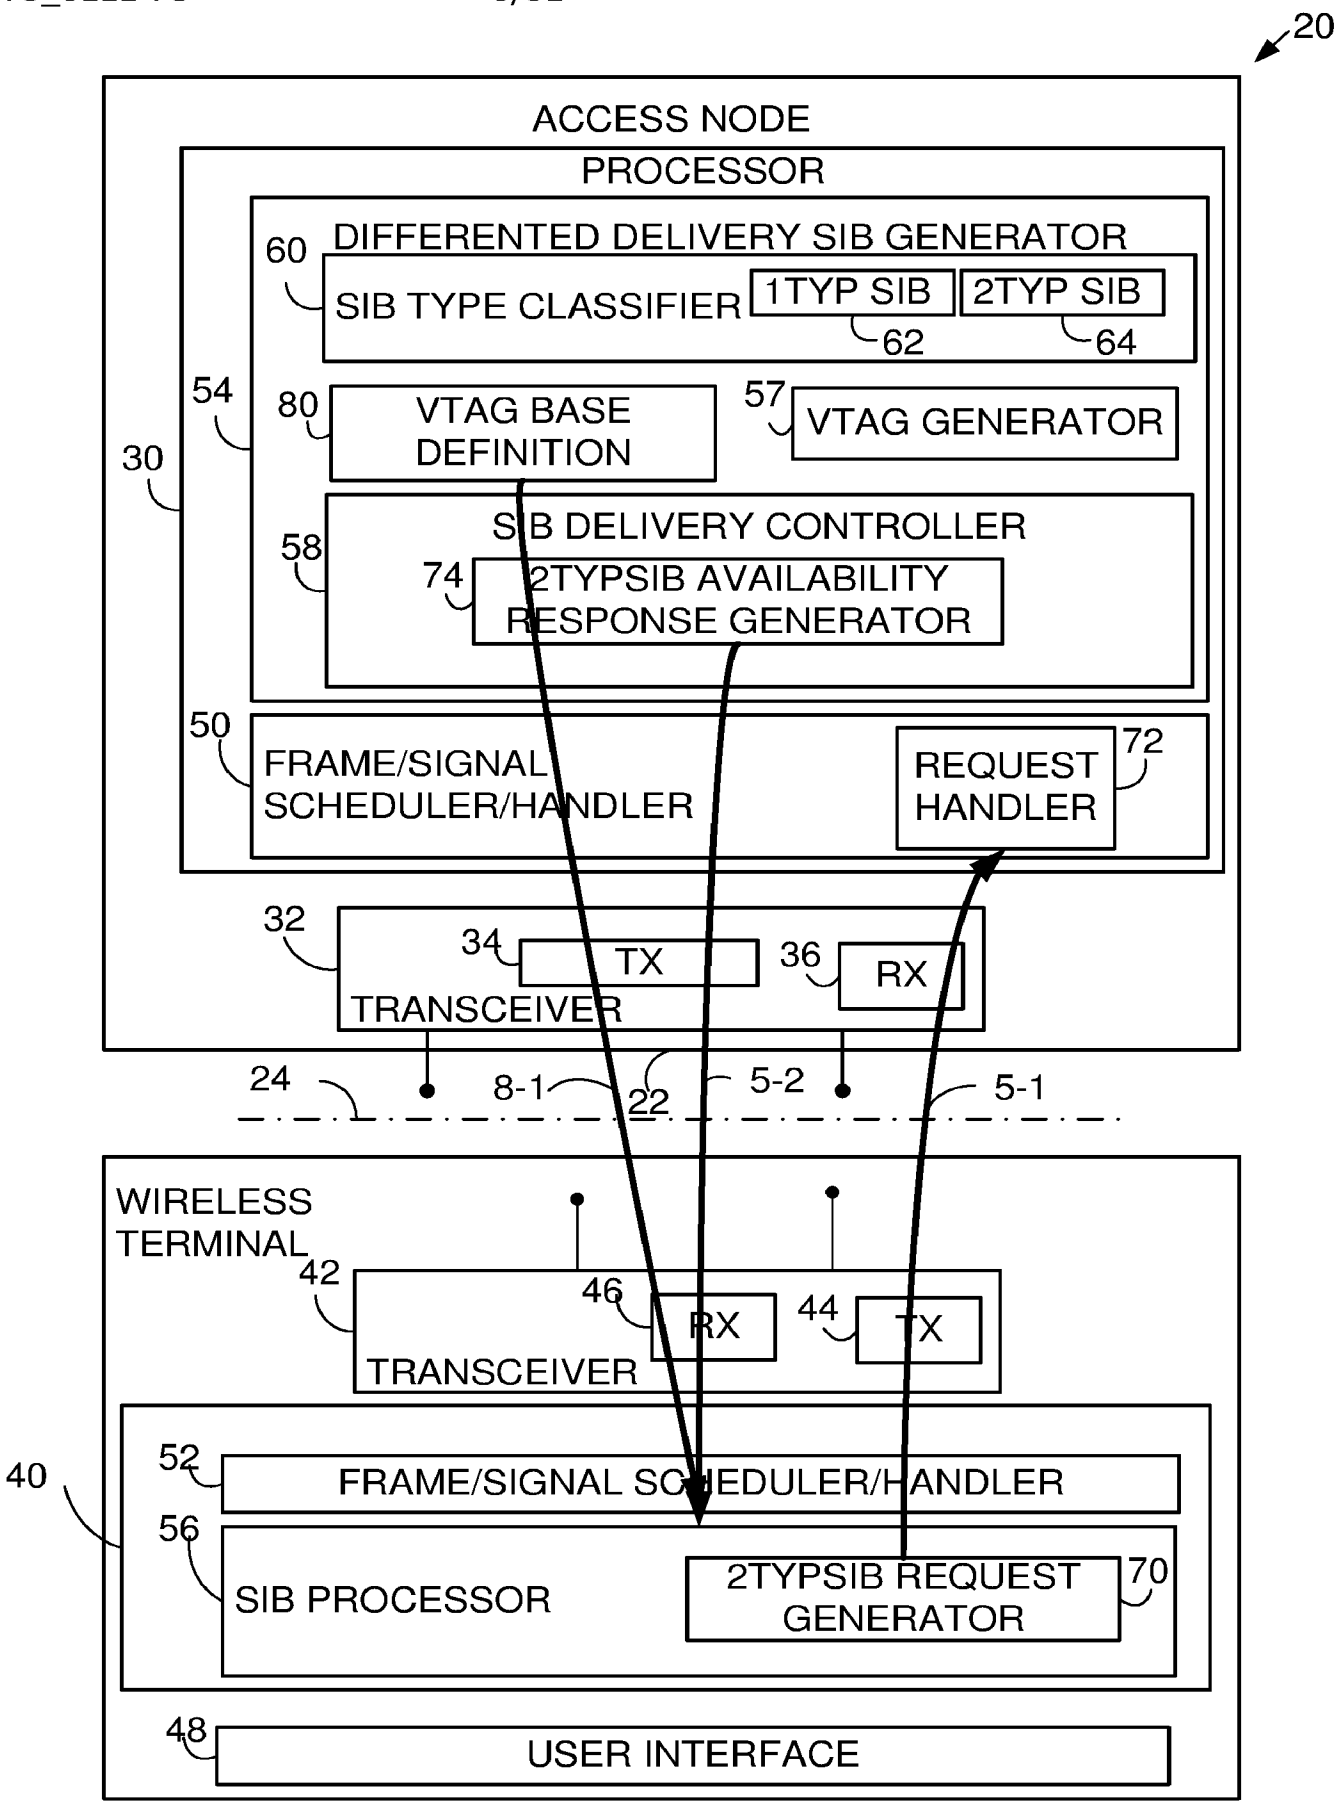

20
ACCESS NODE
PROCESSOR
60
DIFFERENTED DELIVERY SIB GENERATOR
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
54
80
VTAG BASE DEFINITION
57
VTAG GENERATOR
30
58
SIB DELIVERY CONTROLLER
74
2TYPSIB AVAILABILITY RESPONSE GENERATOR
50
FRAME/SIGNAL SCHEDULER/HANDLER
72
REQUEST HANDLER
32
34
TX
36
RX
TRANSCEIVER
24
8-1
22
5-2
5-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
70
48
USER INTERFACE

Fig. 8

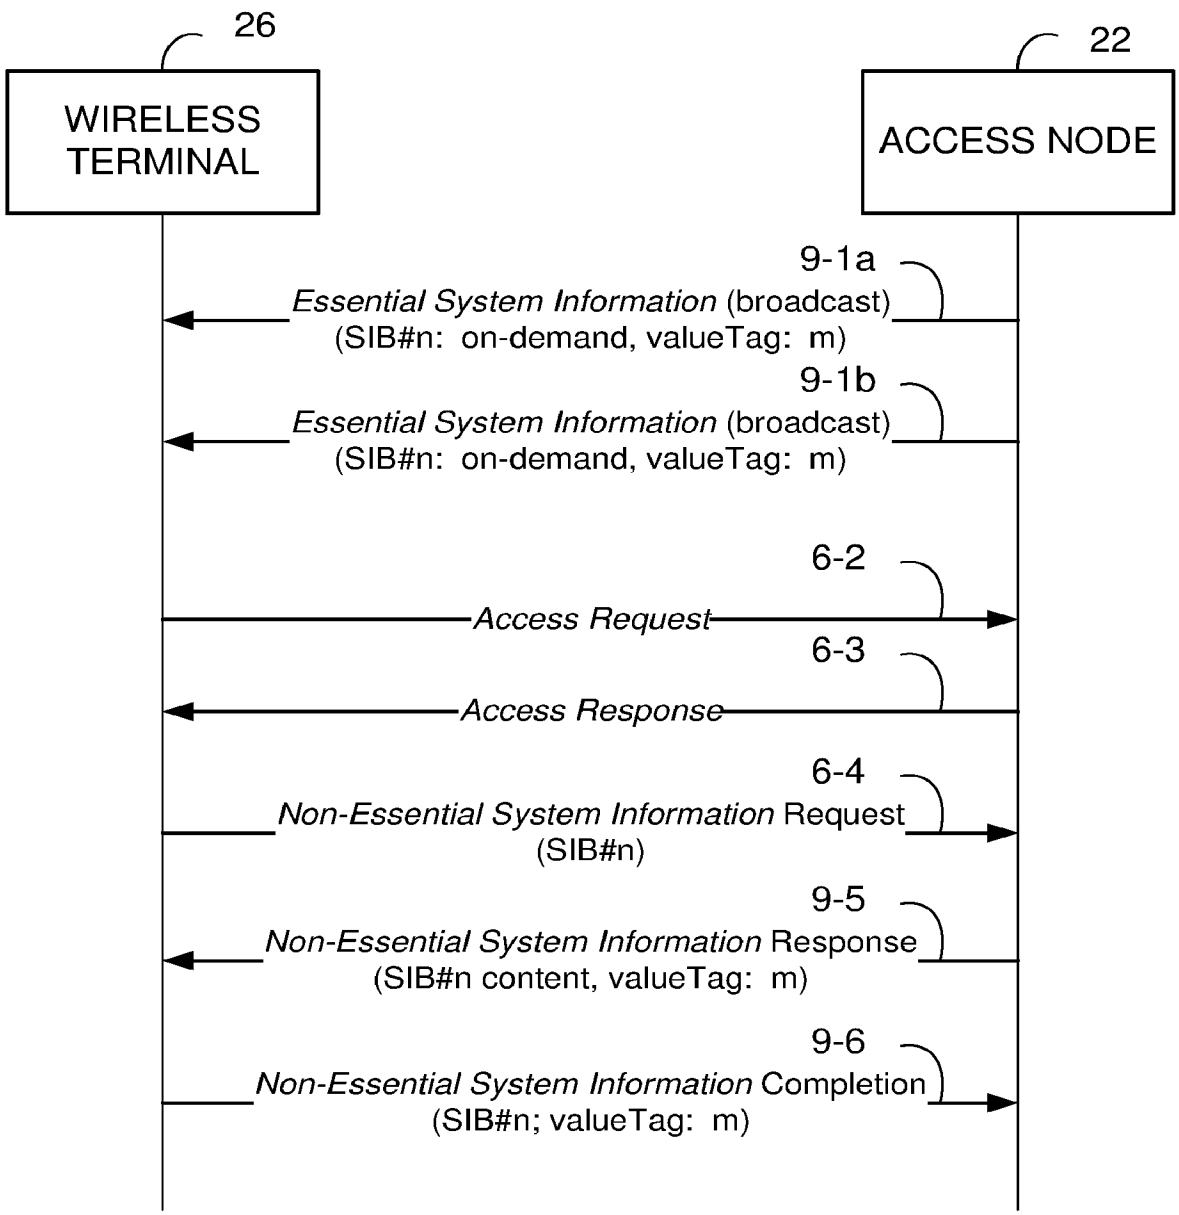

26
WIRELESS TERMINAL
22
ACCESS NODE
9-1a
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
9-1b
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
6-2
Access Request
6-3
Access Response
6-4
Non-Essential System Information Request
(SIB#n)
9-5
Non-Essential System Information Response
(SIB#n content, valueTag: m)
9-6
Non-Essential System Information Completion
(SIB#n; valueTag: m)

Fig. 9

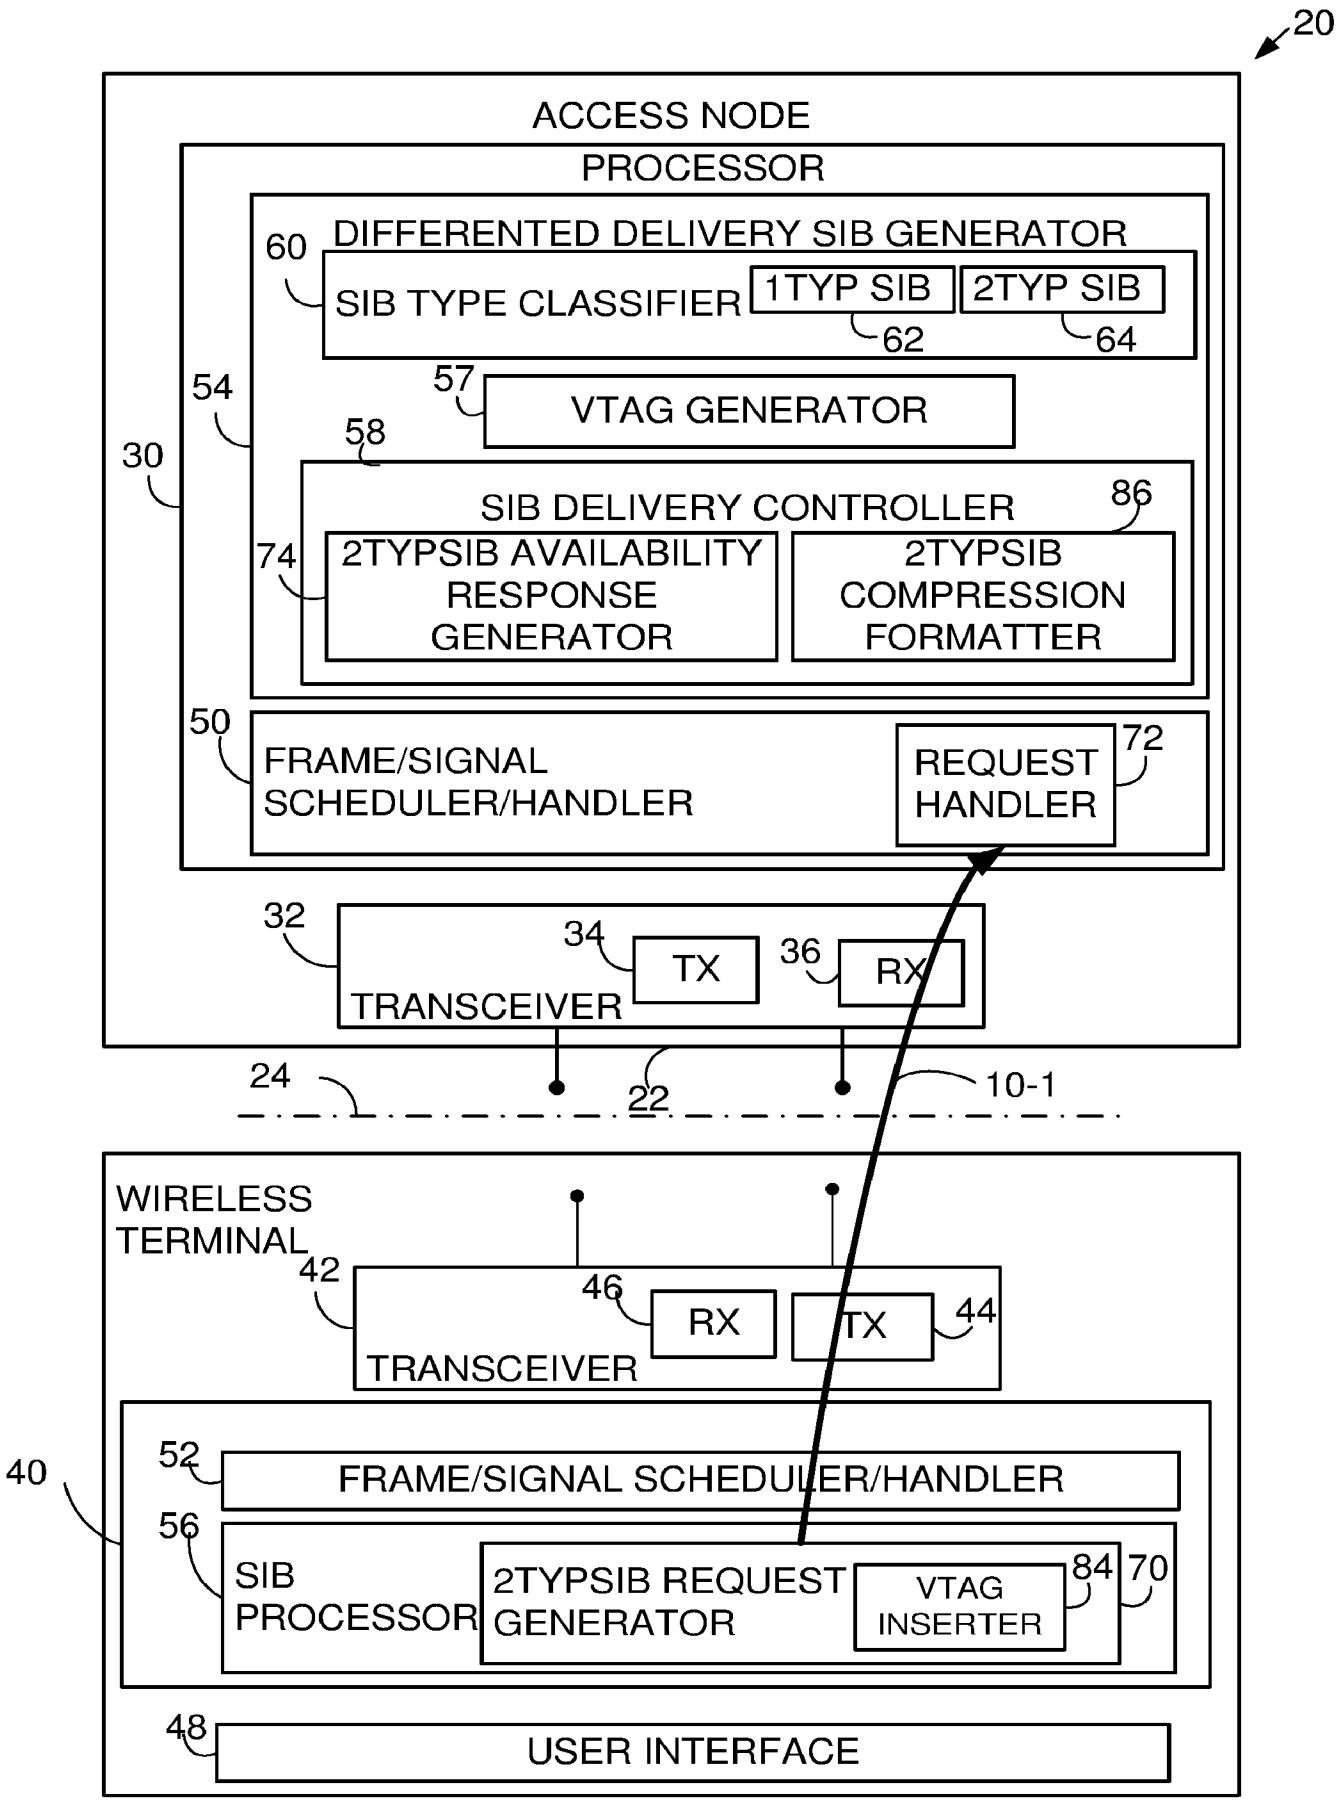

20
ACCESS NODE
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
54
57
VTAG GENERATOR
58
30
SIB DELIVERY CONTROLLER
86
74
2TYPSIB AVAILABILITY RESPONSE GENERATOR
2TYPSIB COMPRESSION FORMATTER
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
22
10-1
WIRELESS TERMINAL
42
46
RX
TX
44
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
VTAG INSERTER
84
70
48
USER INTERFACE

Fig. 10

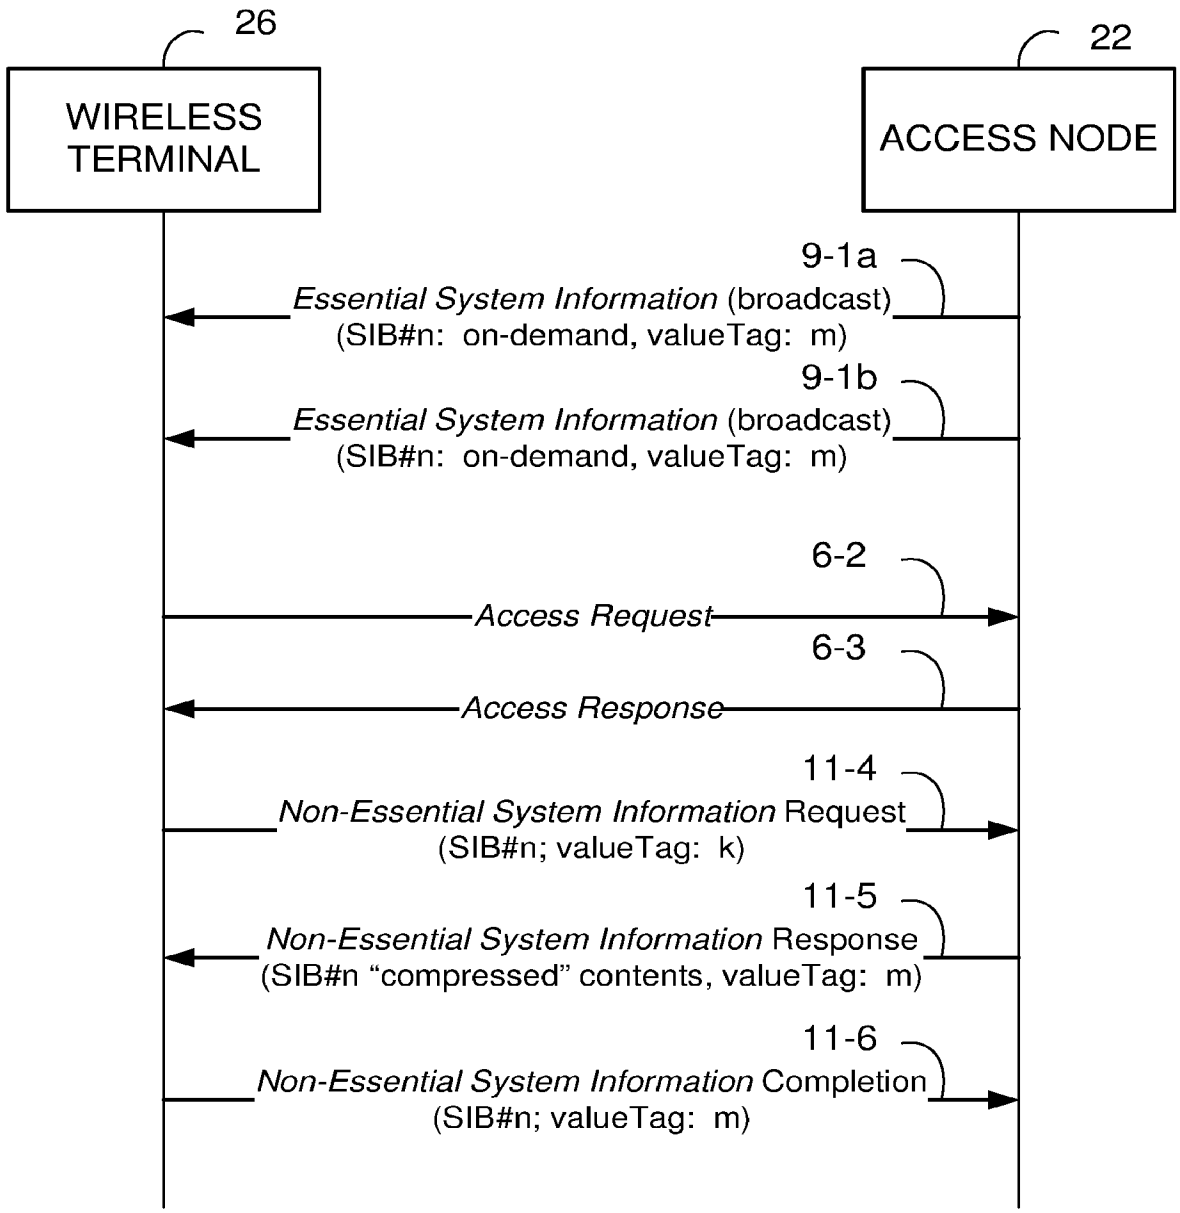

26
WIRELESS TERMINAL
22
ACCESS NODE
9-1a
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
9-1b
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
6-2
Access Request
6-3
Access Response
11-4
Non-Essential System Information Request
(SIB#n; valueTag: k)
11-5
Non-Essential System Information Response
(SIB#n "compressed" contents, valueTag: m)
11-6
Non-Essential System Information Completion
(SIB#n; valueTag: m)

Fig. 11

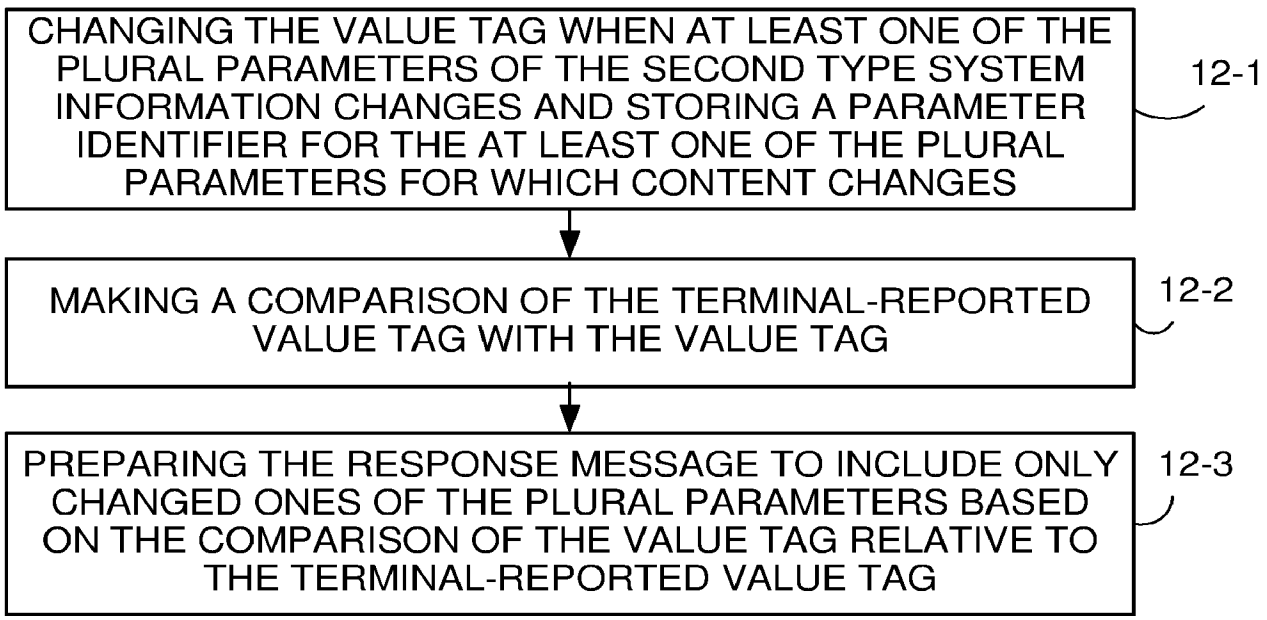

CHANGING THE VALUE TAG WHEN AT LEAST ONE OF THE PLURAL PARAMETERS OF THE SECOND TYPE SYSTEM INFORMATION CHANGES AND STORING A PARAMETER IDENTIFIER FOR THE AT LEAST ONE OF THE PLURAL PARAMETERS FOR WHICH CONTENT CHANGES
12-1
MAKING A COMPARISON OF THE TERMINAL-REPORTED VALUE TAG WITH THE VALUE TAG
12-2
PREPARING THE RESPONSE MESSAGE TO INCLUDE ONLY CHANGED ONES OF THE PLURAL PARAMETERS BASED ON THE COMPARISON OF THE VALUE TAG RELATIVE TO THE TERMINAL-REPORTED VALUE TAG
12-3

Fig. 12

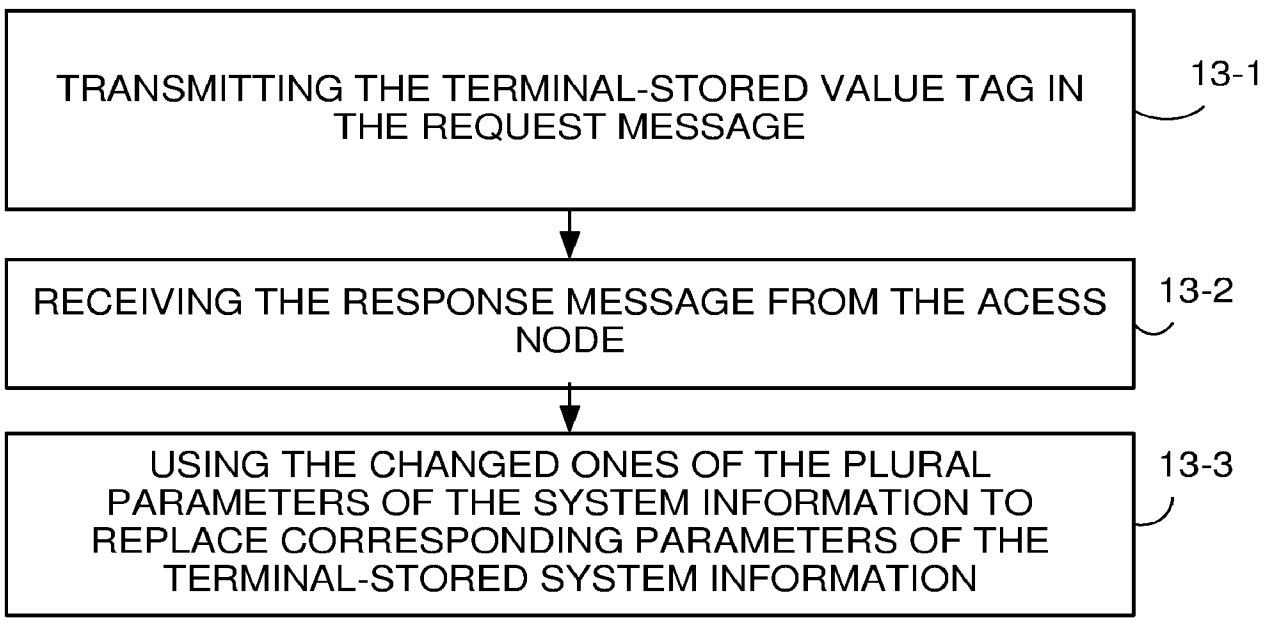

TRANSMITTING THE TERMINAL-STORED VALUE TAG IN THE REQUEST MESSAGE
13-1
RECEIVING THE RESPONSE MESSAGE FROM THE ACESS NODE
13-2
USING THE CHANGED ONES OF THE PLURAL PARAMETERS OF THE SYSTEM INFORMATION TO REPLACE CORRESPONDING PARAMETERS OF THE TERMINAL-STORED SYSTEM INFORMATION
13-3

Fig. 13

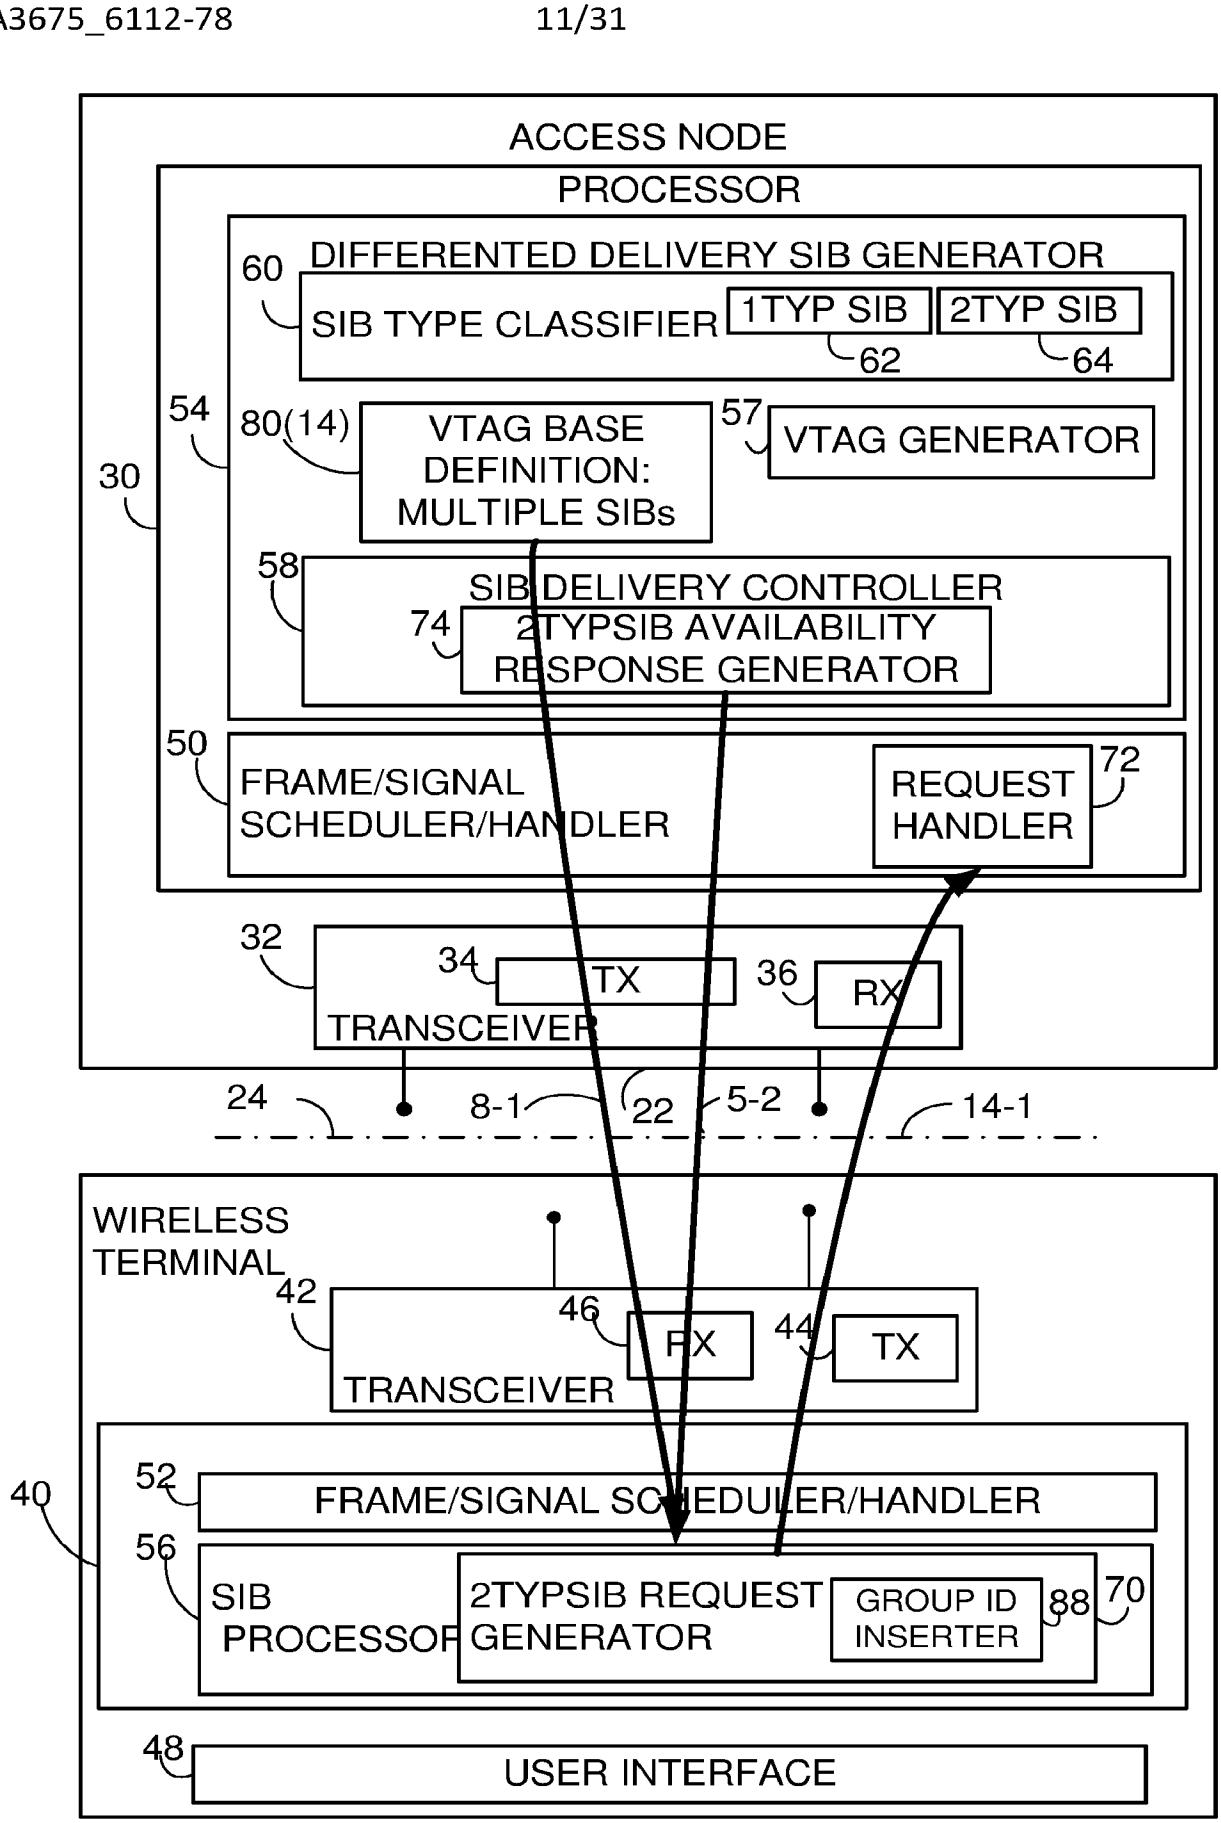

20
ACCESS NODE
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
54
80(14)
VTAG BASE DEFINITION: MULTIPLE SIBs
57
VTAG GENERATOR
30
58
SIB DELIVERY CONTROLLER
74
2TYPSIB AVAILABILITY RESPONSE GENERATOR
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
8-1
22
5-2
14-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
GROUP ID INSERTER
88
70
48
USER INTERFACE

Fig. 14

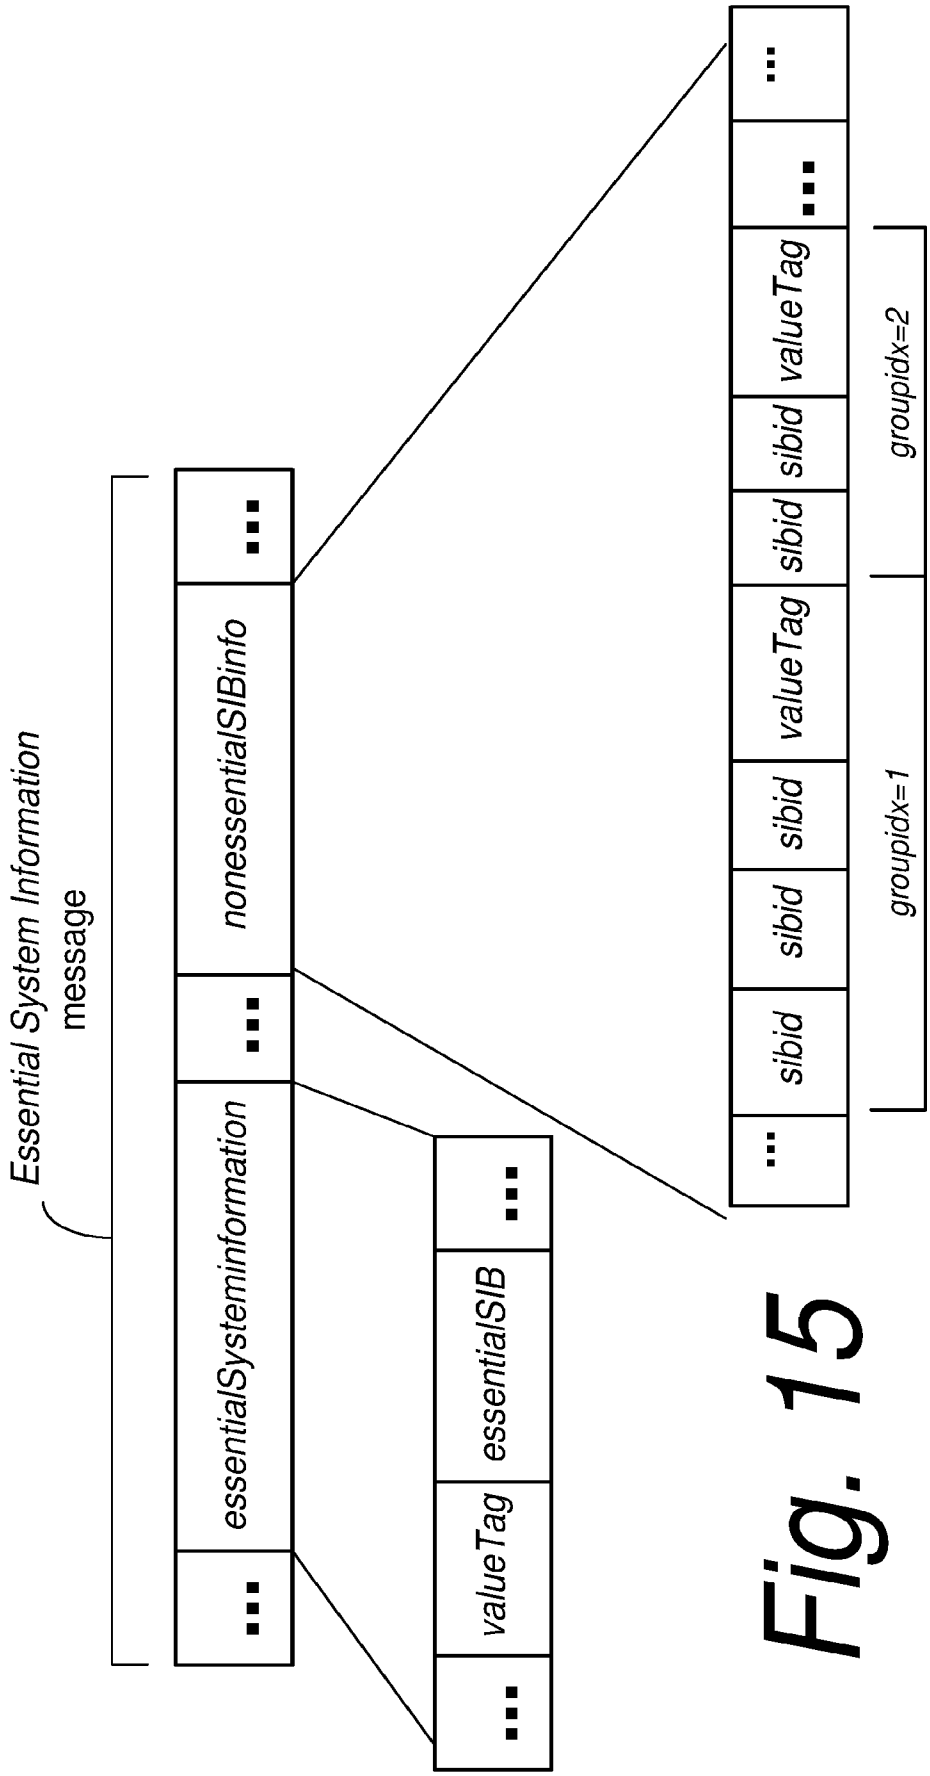

Essential System Information message
essentialSysteminformation
nonessentialSIBinfo
valueTag
essentialSIB
sibid
valueTag
sibid
sibid
valueTag
sibid
sibid
valueTag
groupidx=1
groupidx=2

Fig. 15

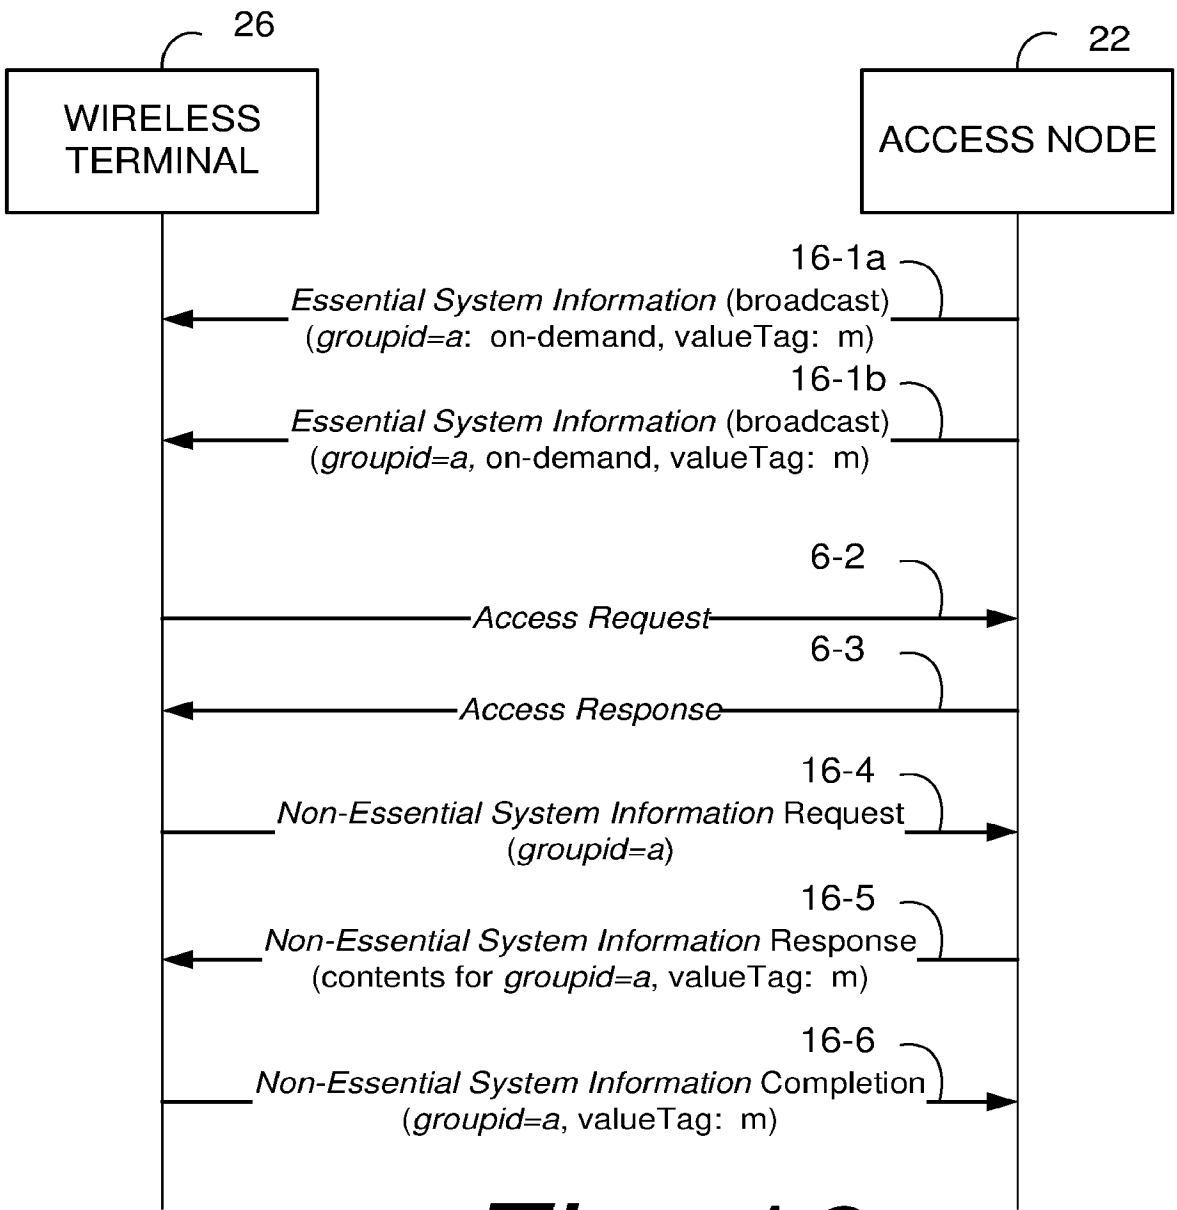

26
WIRELESS TERMINAL
22
ACCESS NODE
16-1a
Essential System Information (broadcast)
(groupid=a: on-demand, valueTag: m)
16-1b
Essential System Information (broadcast)
(groupid=a, on-demand, valueTag: m)
6-2
Access Request
6-3
Access Response
16-4
Non-Essential System Information Request
(groupid=a)
16-5
Non-Essential System Information Response
(contents for groupid=a, valueTag: m)
16-6
Non-Essential System Information Completion
(groupid=a, valueTag: m)

Fig. 16

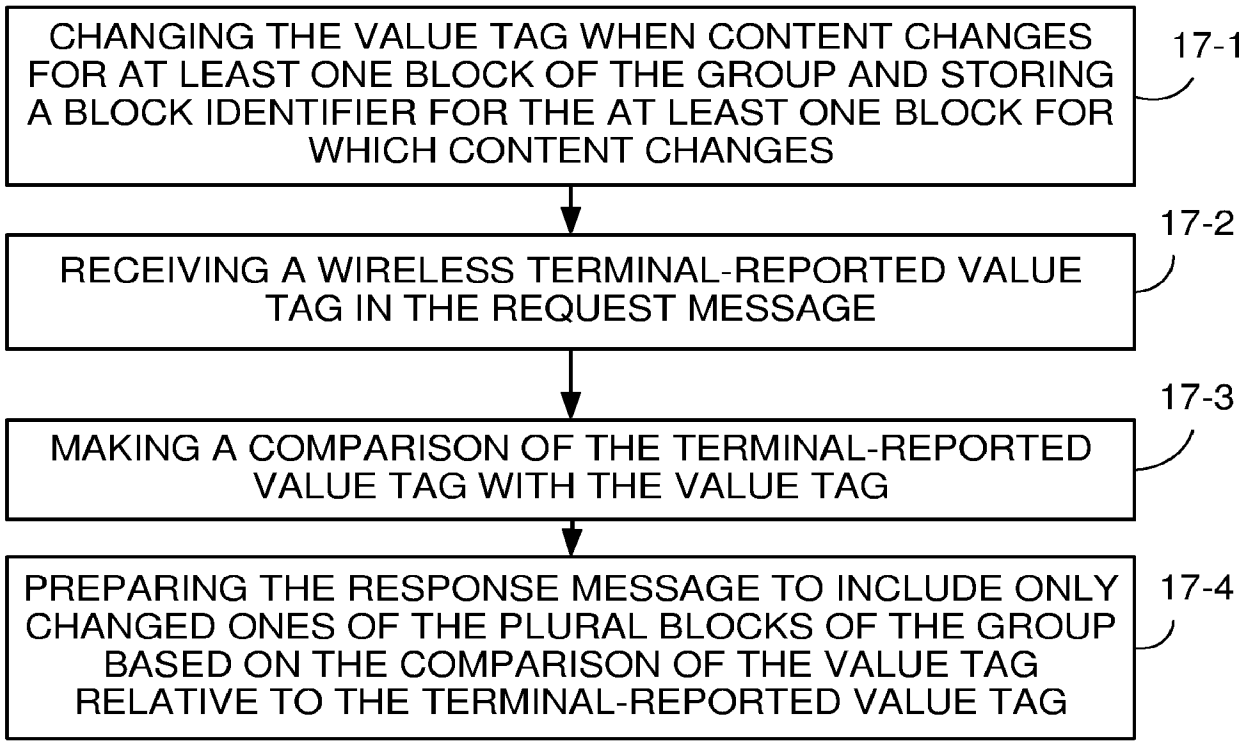

CHANGING THE VALUE TAG WHEN CONTENT CHANGES FOR AT LEAST ONE BLOCK OF THE GROUP AND STORING A BLOCK IDENTIFIER FOR THE AT LEAST ONE BLOCK FOR WHICH CONTENT CHANGES
17-1
RECEIVING A WIRELESS TERMINAL-REPORTED VALUE TAG IN THE REQUEST MESSAGE
17-2
MAKING A COMPARISON OF THE TERMINAL-REPORTED VALUE TAG WITH THE VALUE TAG
17-3
PREPARING THE RESPONSE MESSAGE TO INCLUDE ONLY CHANGED ONES OF THE PLURAL BLOCKS OF THE GROUP BASED ON THE COMPARISON OF THE VALUE TAG RELATIVE TO THE TERMINAL-REPORTED VALUE TAG
17-4

Fig. 17

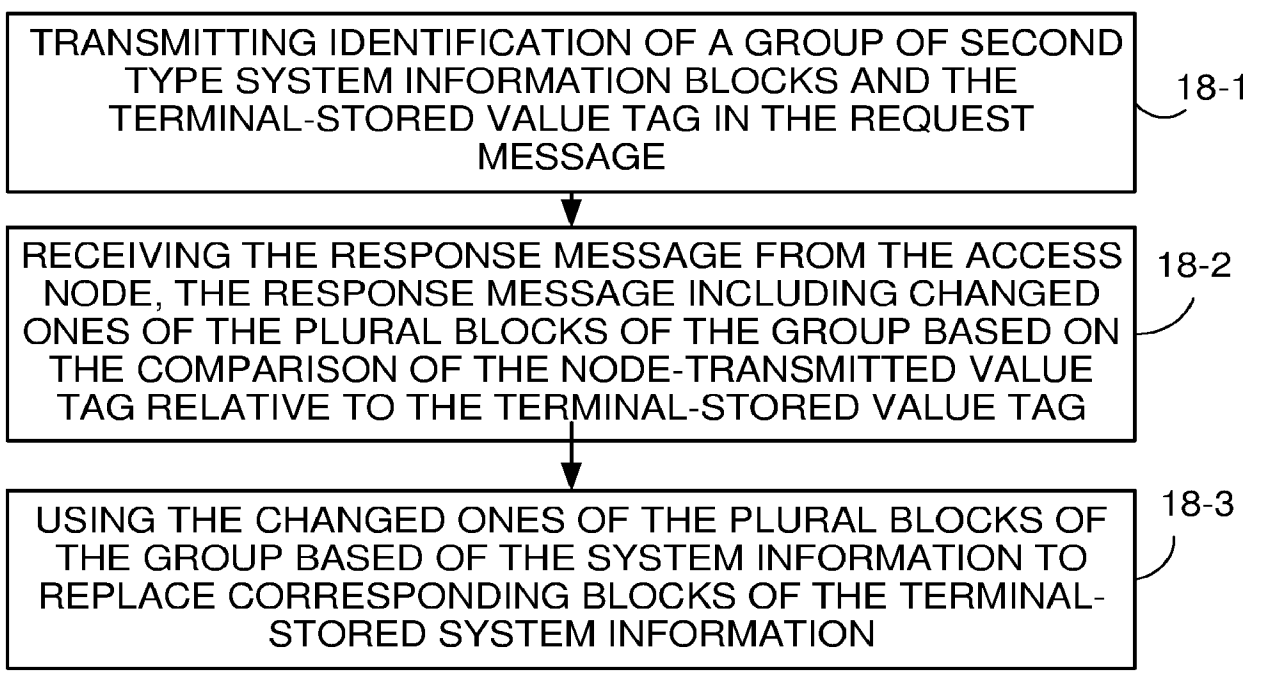

TRANSMITTING IDENTIFICATION OF A GROUP OF SECOND TYPE SYSTEM INFORMATION BLOCKS AND THE TERMINAL-STORED VALUE TAG IN THE REQUEST MESSAGE
18-1
RECEIVING THE RESPONSE MESSAGE FROM THE ACCESS NODE, THE RESPONSE MESSAGE INCLUDING CHANGED ONES OF THE PLURAL BLOCKS OF THE GROUP BASED ON THE COMPARISON OF THE NODE-TRANSMITTED VALUE TAG RELATIVE TO THE TERMINAL-STORED VALUE TAG
18-2
USING THE CHANGED ONES OF THE PLURAL BLOCKS OF THE GROUP BASED OF THE SYSTEM INFORMATION TO REPLACE CORRESPONDING BLOCKS OF THE TERMINAL-STORED SYSTEM INFORMATION
18-3

Fig. 18

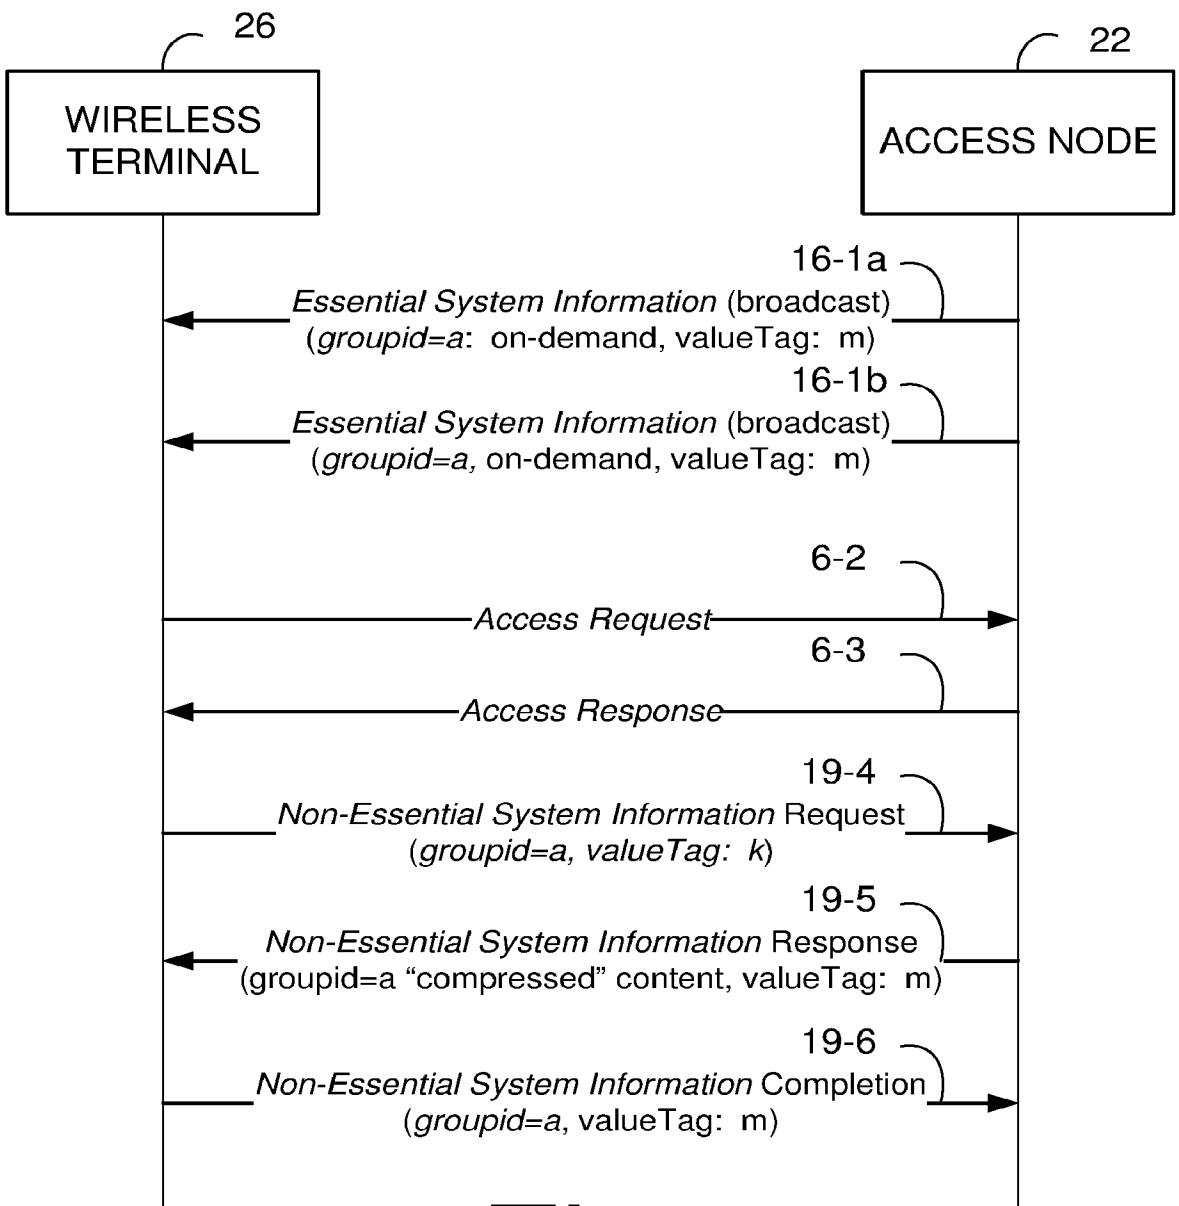

26
WIRELESS TERMINAL
22
ACCESS NODE
16-1a
Essential System Information (broadcast)
(groupid=a: on-demand, valueTag: m)
16-1b
Essential System Information (broadcast)
(groupid=a, on-demand, valueTag: m)
6-2
Access Request
6-3
Access Response
19-4
Non-Essential System Information Request
(groupid=a, valueTag: k)
19-5
Non-Essential System Information Response
(groupid=a "compressed" content, valueTag: m)
19-6
Non-Essential System Information Completion
(groupid=a, valueTag: m)

Fig. 19

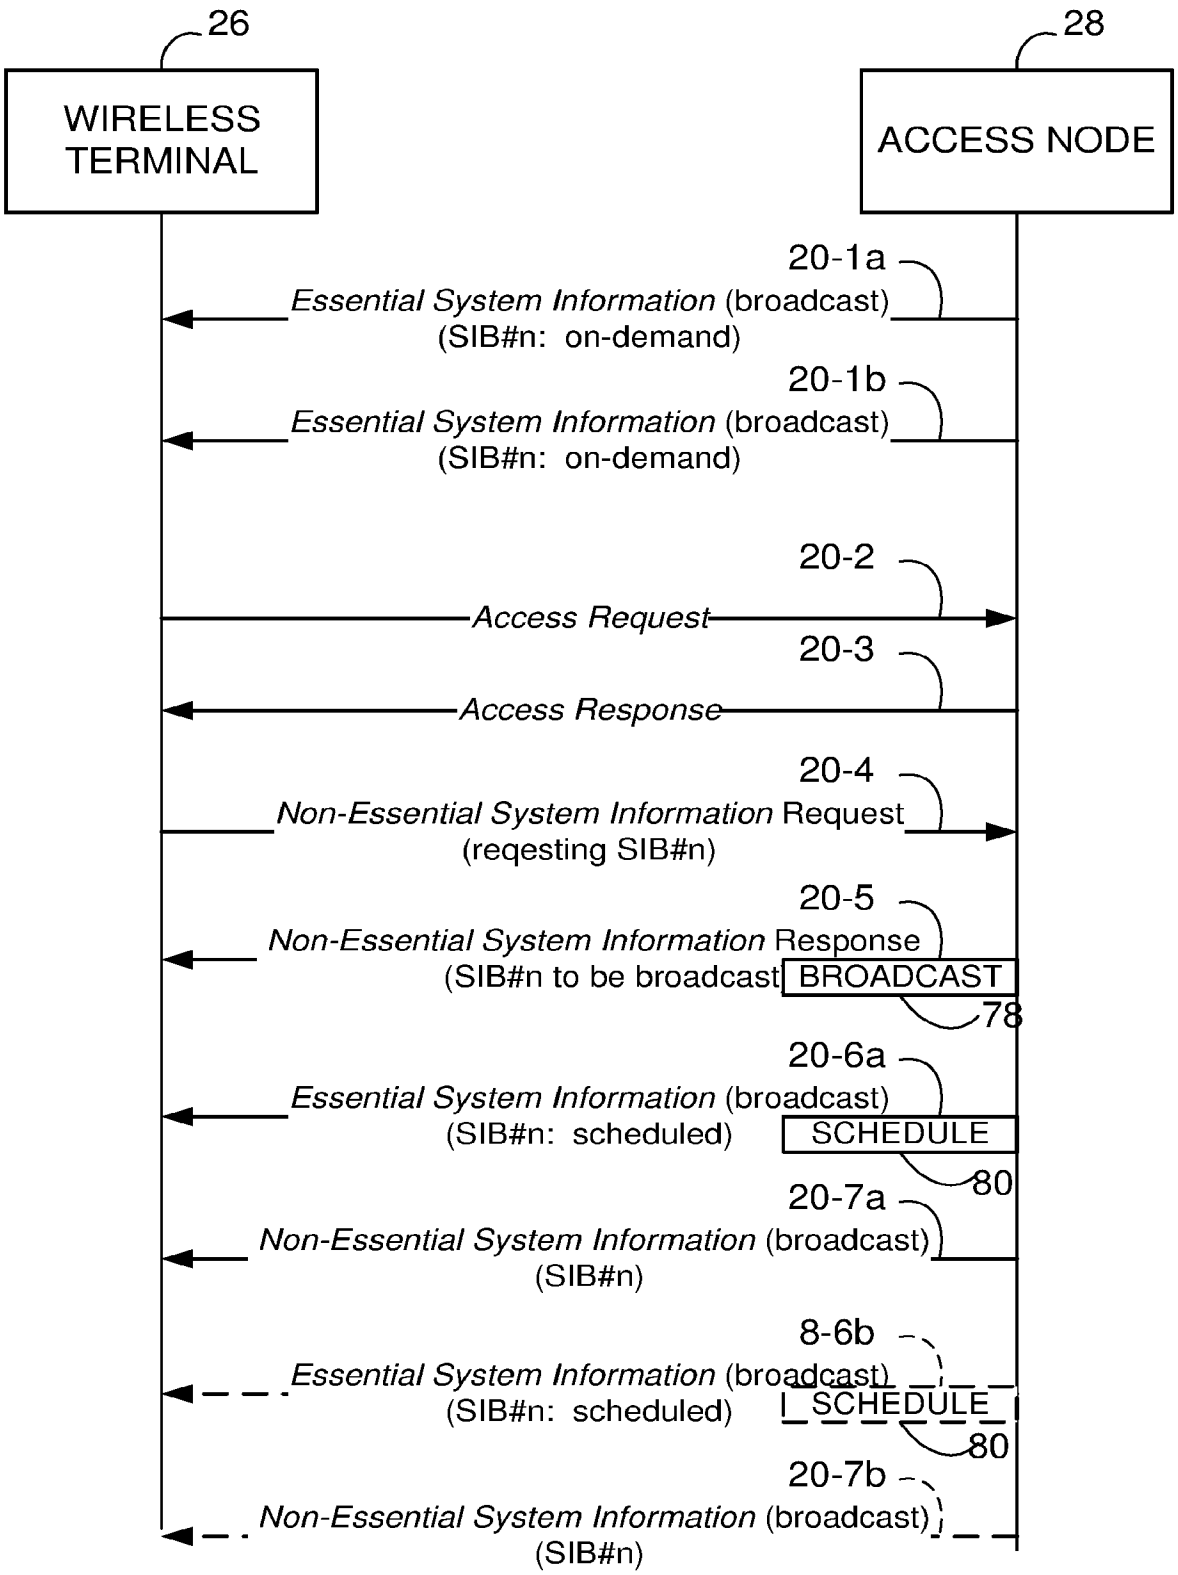

26
WIRELESS TERMINAL
28
ACCESS NODE
20-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
20-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
20-2
Access Request
20-3
Access Response
20-4
Non-Essential System Information Request
(reqesting SIB#n)
20-5
Non-Essential System Information Response
(SIB#n to be broadcast
BROADCAST
78
20-6a
Essential System Information (broadcast)
(SIB#n: scheduled)
SCHEDULE
80
20-7a
Non-Essential System Information (broadcast)
(SIB#n)
8-6b
Essential System Information (broadcast)
(SIB#n: scheduled)
SCHEDULE
80
20-7b
Non-Essential System Information (broadcast)
(SIB#n)

Fig. 20

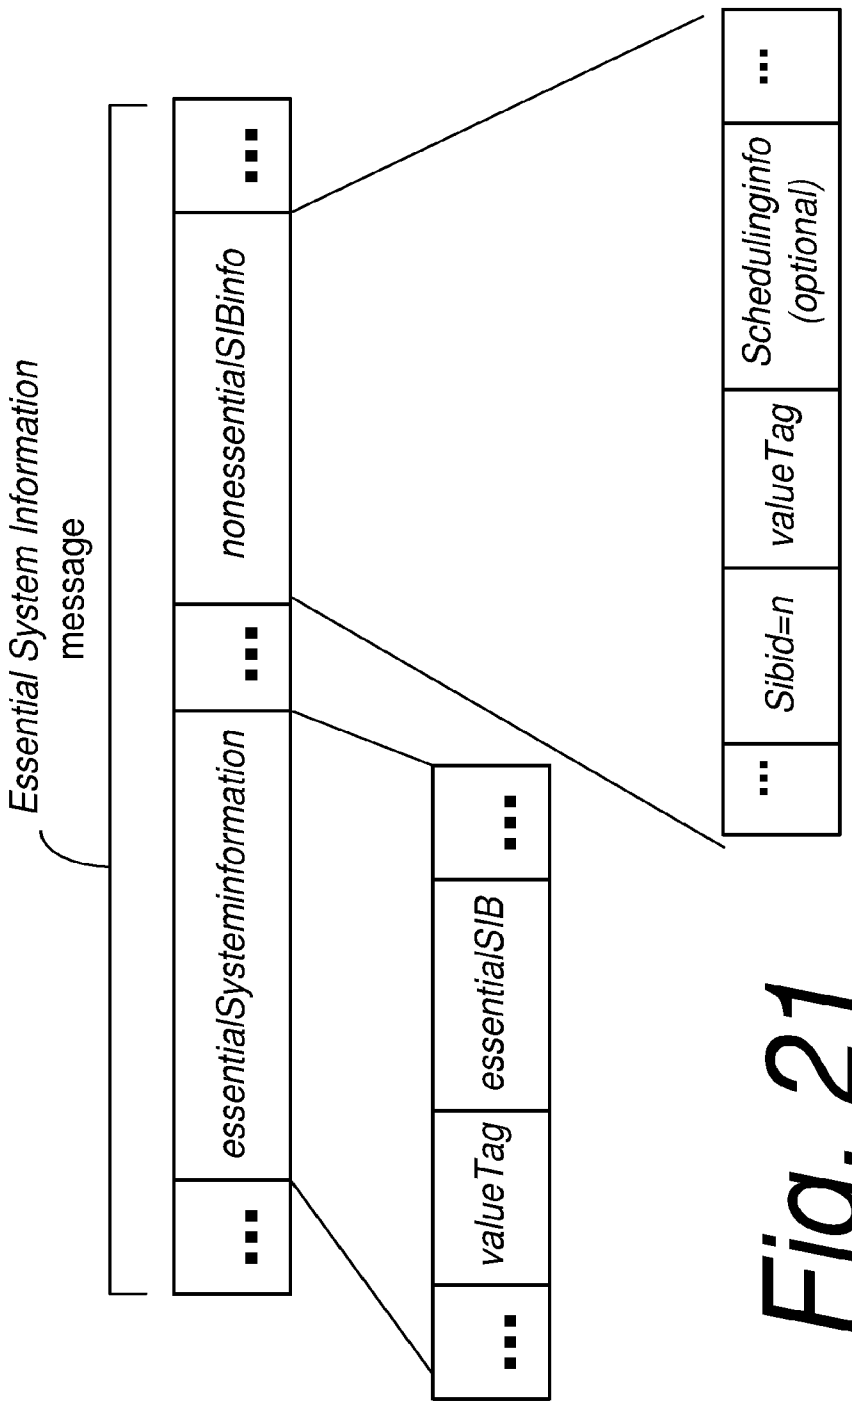

Essential System Information message
...
essentialSysteminformation
...
nonessentialSIBinfo
...
...
valueTag
essentialSIB
...
...
Sibid=n
valueTag
Schedulinginfo (optional)
...

Fig. 21

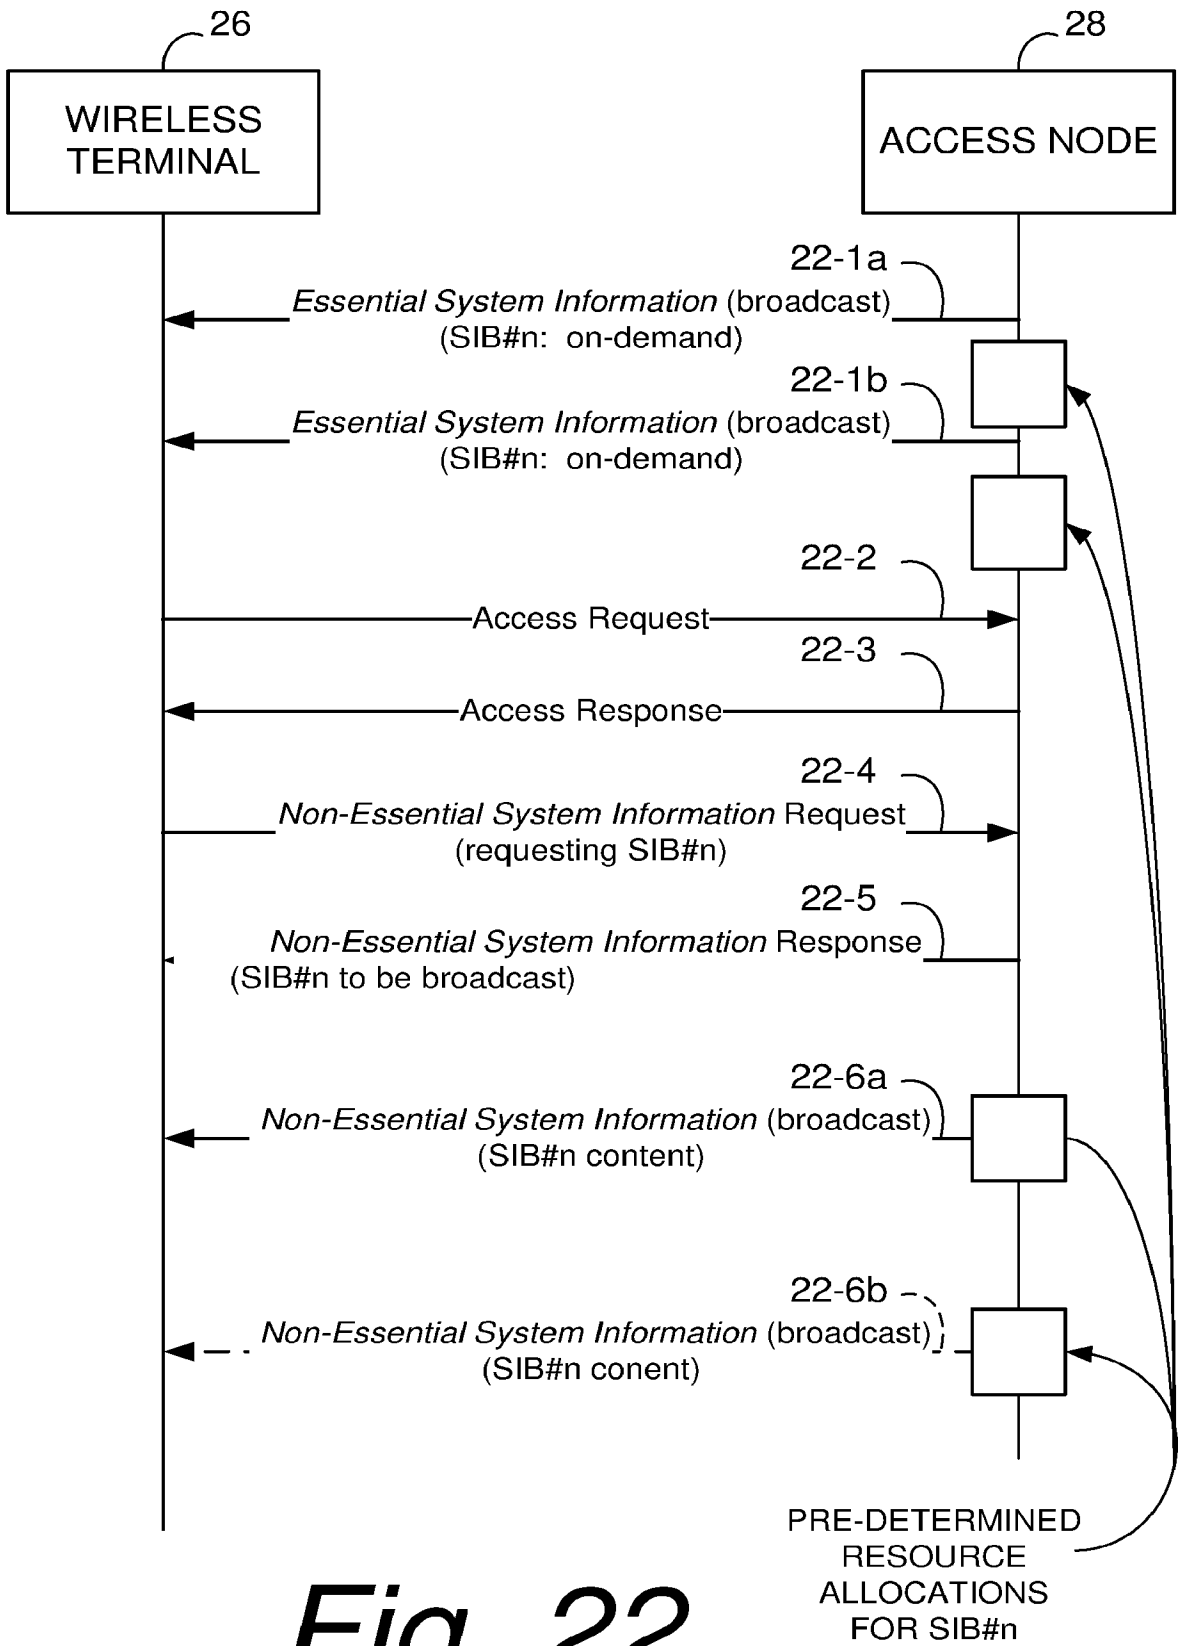
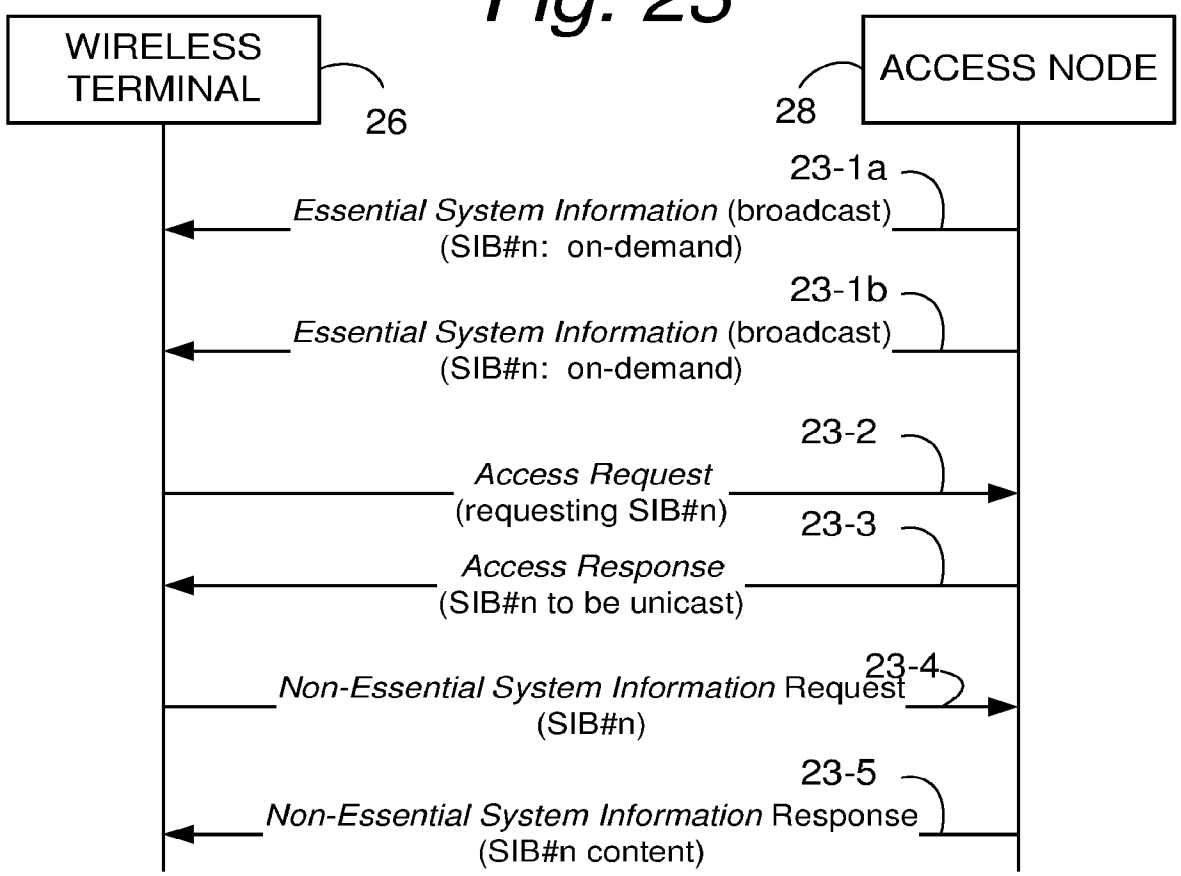

26
WIRELESS TERMINAL
28
ACCESS NODE
22-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
22-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
22-2
Access Request
22-3
Access Response
22-4
Non-Essential System Information Request
(requesting SIB#n)
22-5
Non-Essential System Information Response
(SIB#n to be broadcast)
22-6a
Non-Essential System Information (broadcast)
(SIB#n content)
22-6b
Non-Essential System Information (broadcast)
(SIB#n conent)
PRE-DETERMINED RESOURCE ALLOCATIONS FOR SIB#n

Fig. 22

Fig. 23


WIRELESS TERMINAL
26
ACCESS NODE
28
23-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
23-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
23-2
Access Request
(requesting SIB#n)
23-3
Access Response
(SIB#n to be unicast)
23-4
Non-Essential System Information Request
(SIB#n)
23-5
Non-Essential System Information Response
(SIB#n content)

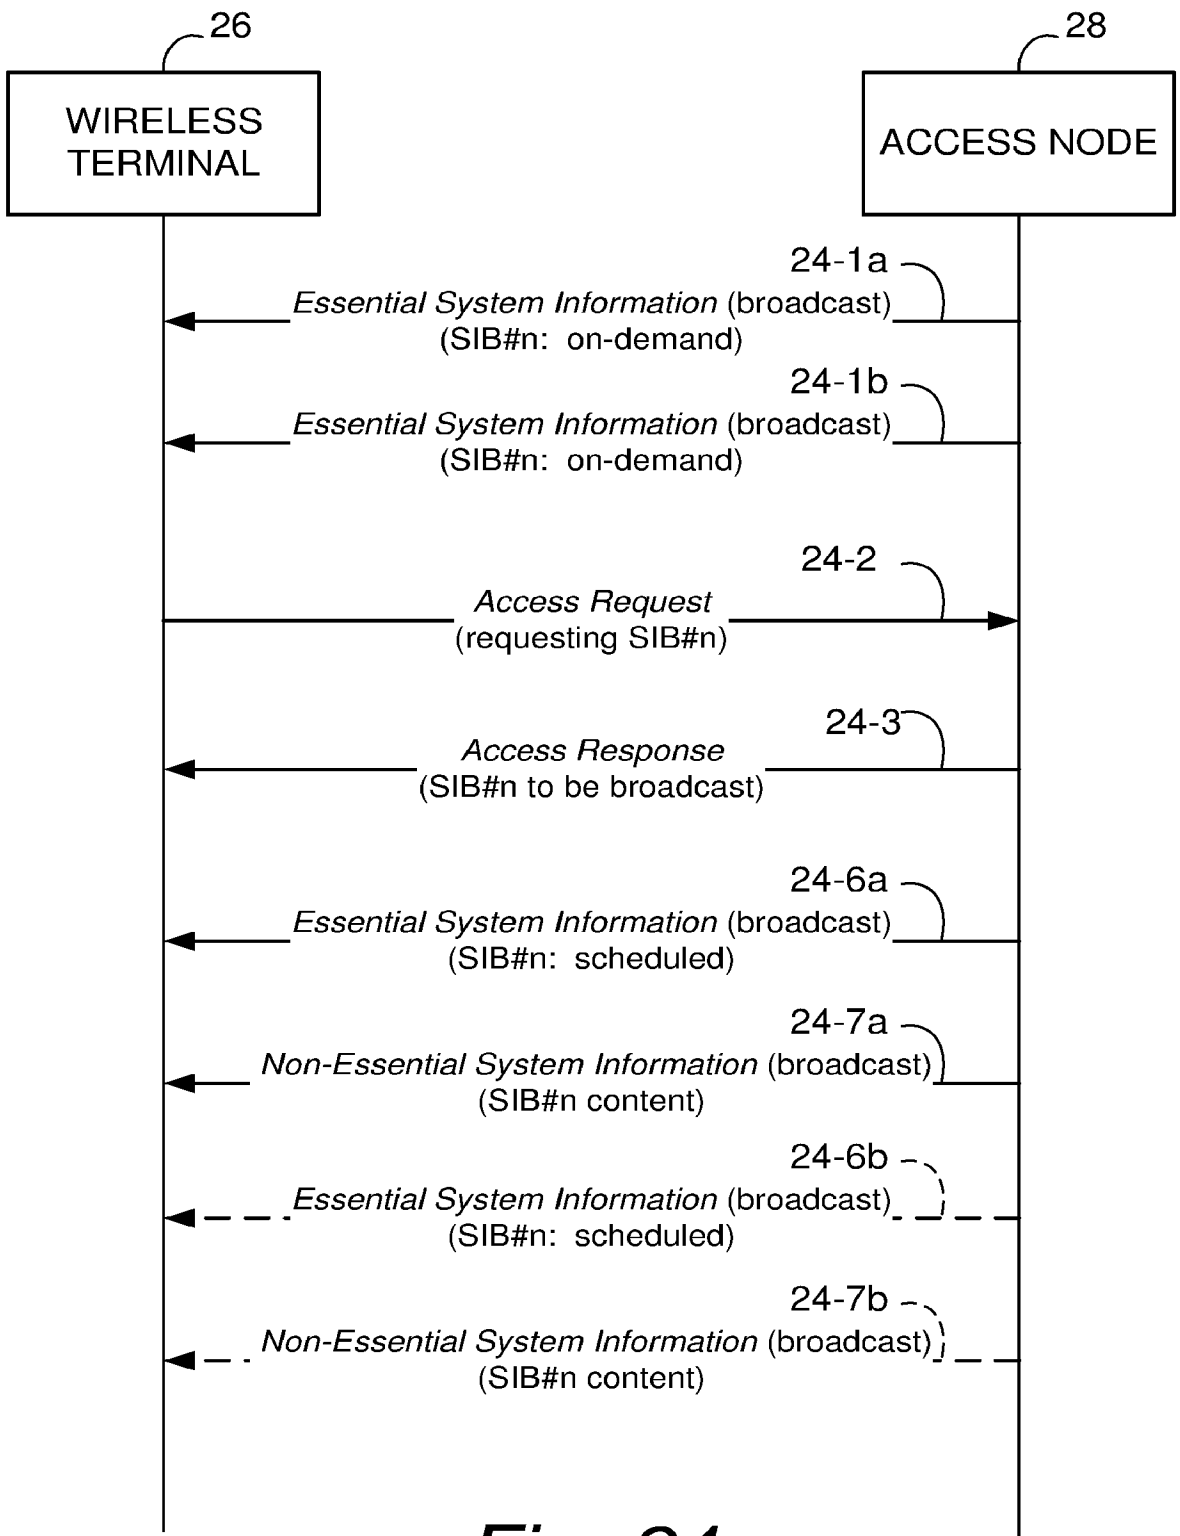

26
WIRELESS TERMINAL
28
ACCESS NODE
24-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
24-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
24-2
Access Request
(requesting SIB#n)
24-3
Access Response
(SIB#n to be broadcast)
24-6a
Essential System Information (broadcast)
(SIB#n: scheduled)
24-7a
Non-Essential System Information (broadcast)
(SIB#n content)
24-6b
Essential System Information (broadcast)
(SIB#n: scheduled)
24-7b
Non-Essential System Information (broadcast)
(SIB#n content)

Fig. 24

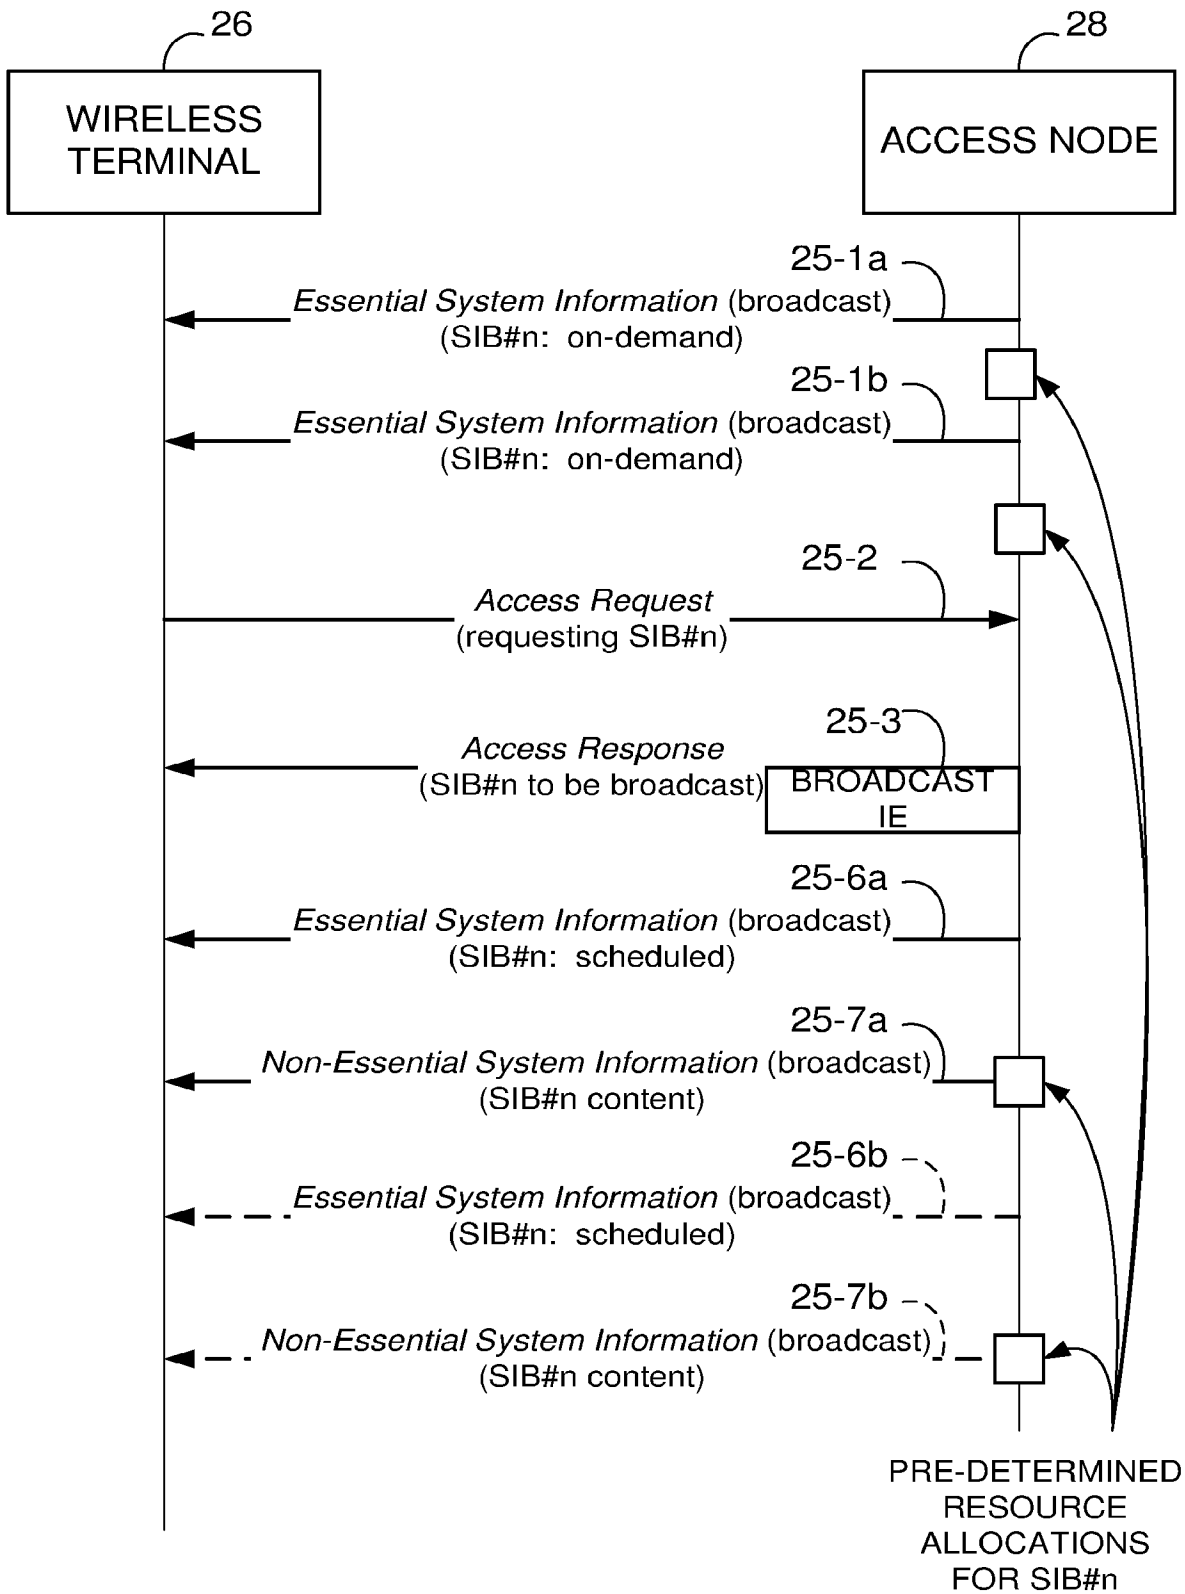

26
WIRELESS TERMINAL
28
ACCESS NODE
25-1a
Essential System Information (broadcast)
(SIB#n: on-demand)
25-1b
Essential System Information (broadcast)
(SIB#n: on-demand)
25-2
Access Request
(requesting SIB#n)
25-3
Access Response
(SIB#n to be broadcast)
BROADCAST IE
25-6a
Essential System Information (broadcast)
(SIB#n: scheduled)
25-7a
Non-Essential System Information (broadcast)
(SIB#n content)
25-6b
Essential System Information (broadcast)
(SIB#n: scheduled)
25-7b
Non-Essential System Information (broadcast)
(SIB#n content)
PRE-DETERMINED RESOURCE ALLOCATIONS FOR SIB#n

Fig. 25

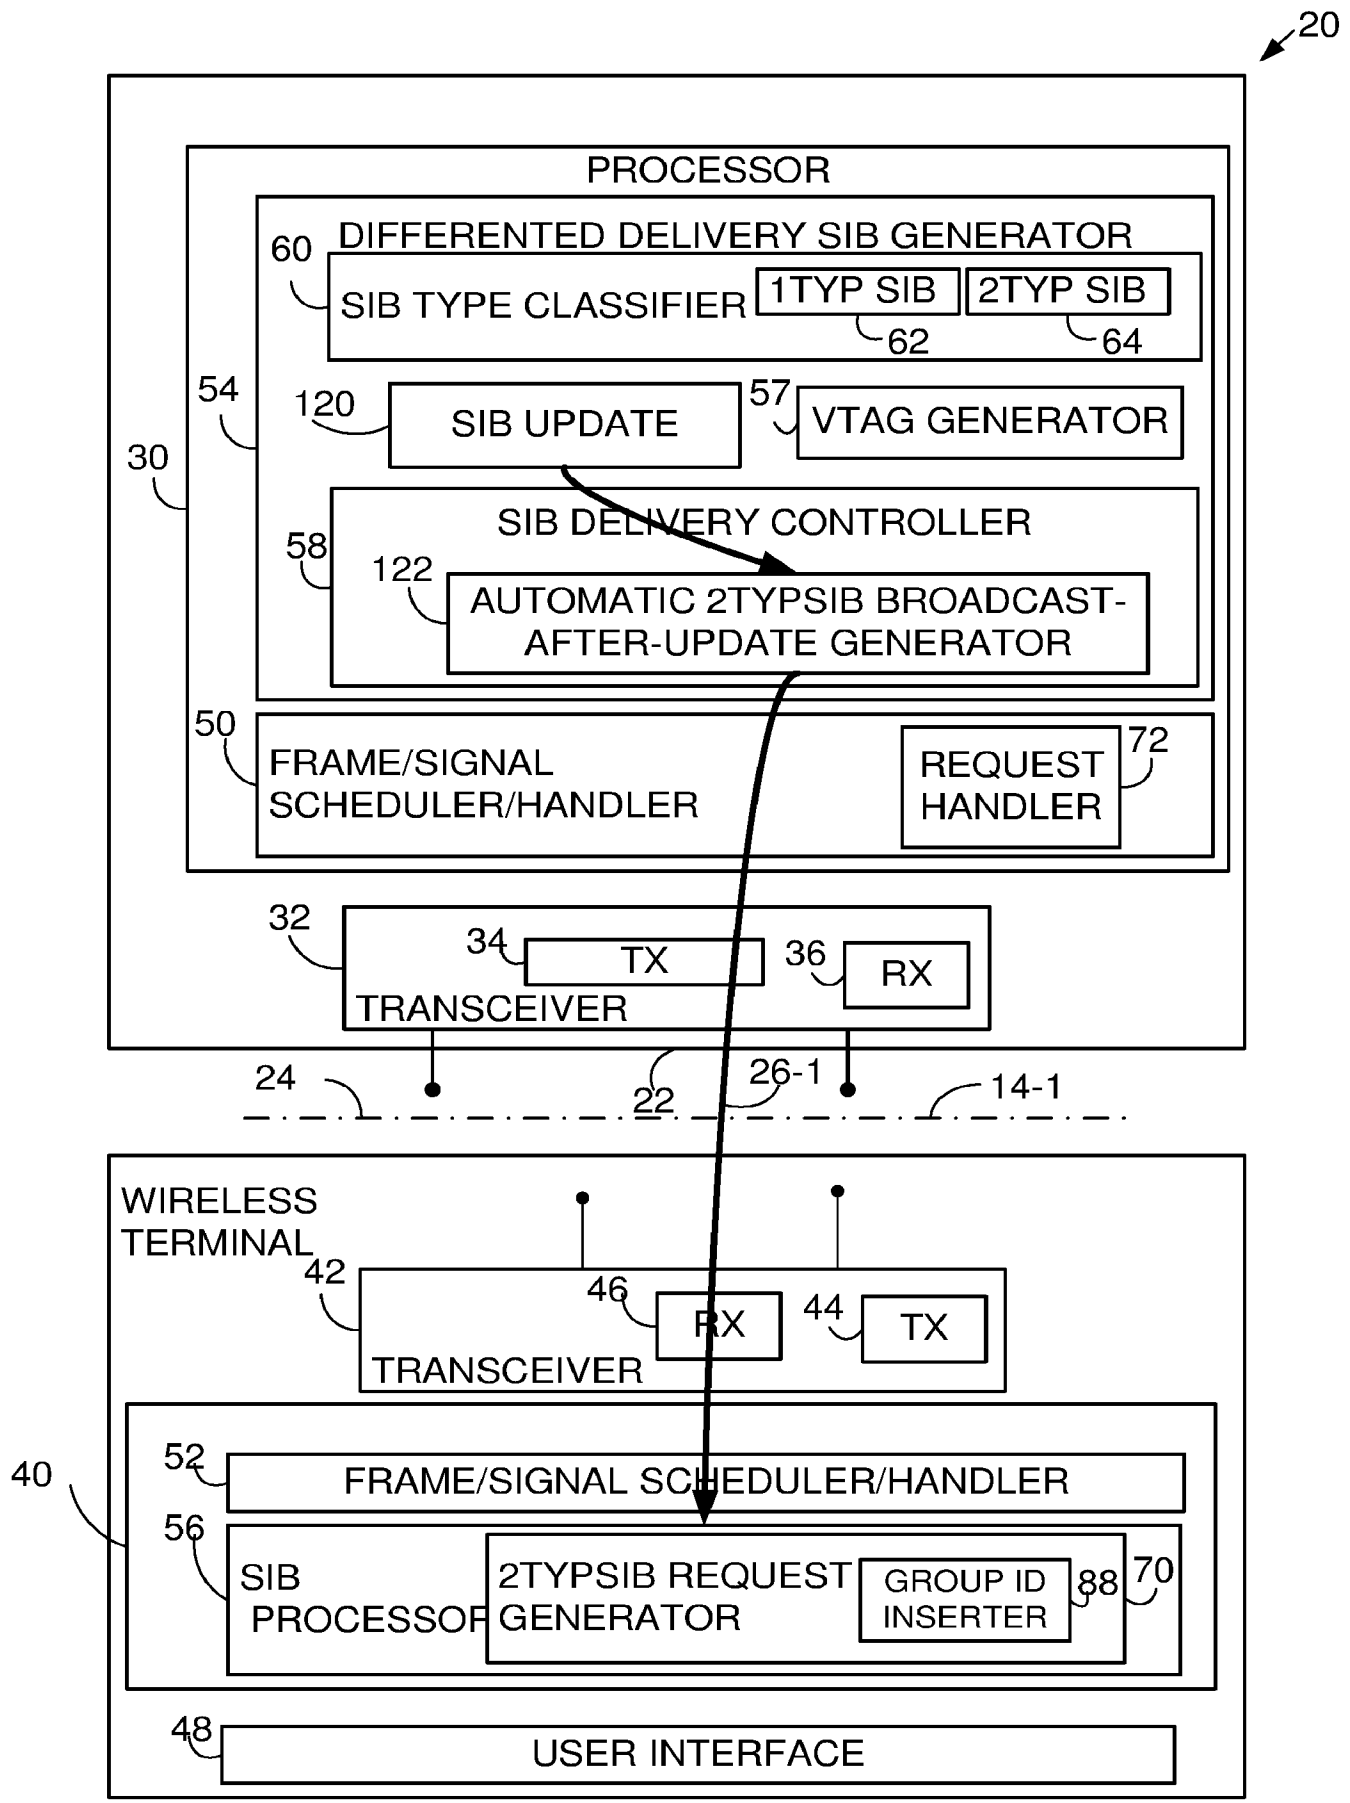

20
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
2TYP SIB
62
64
54
120
SIB UPDATE
57
VTAG GENERATOR
30
SIB DELIVERY CONTROLLER
58
122
AUTOMATIC 2TYPSIB BROADCAST-AFTER-UPDATE GENERATOR
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
22
26-1
14-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
GROUP ID INSERTER
88
70
48
USER INTERFACE

Fig. 26

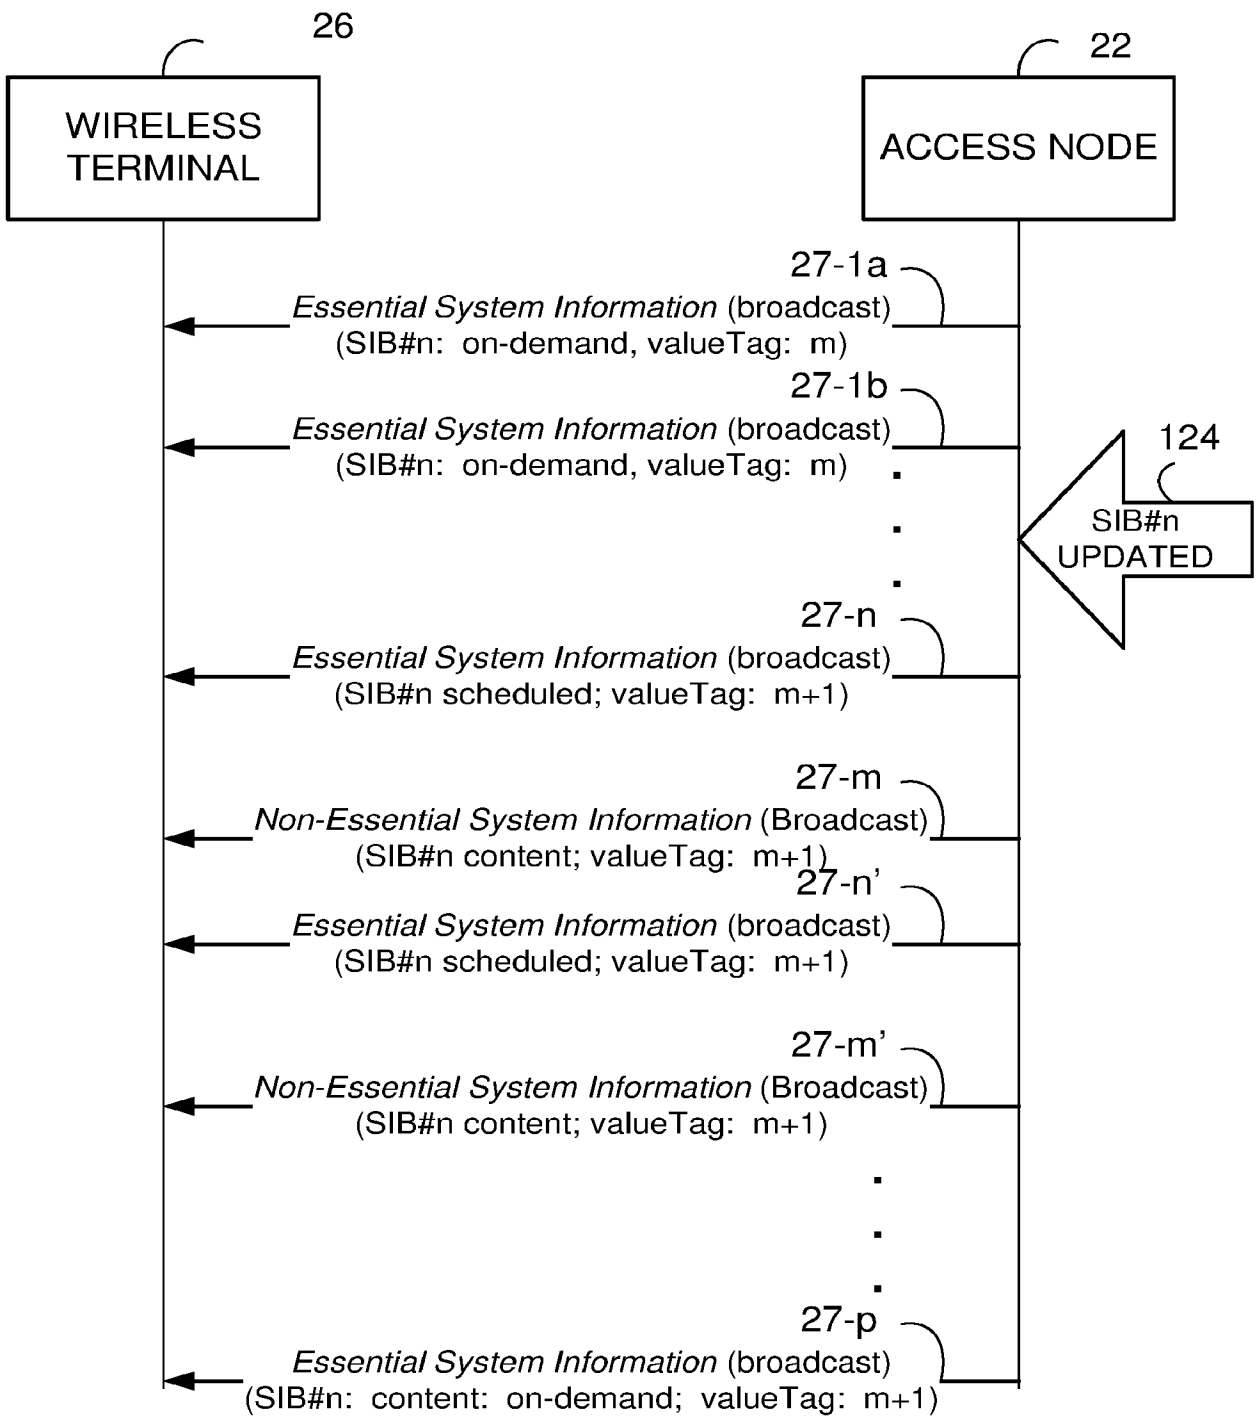

26
WIRELESS TERMINAL
22
ACCESS NODE
27-1a
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
27-1b
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
124
SIB#n UPDATED
27-n
Essential System Information (broadcast)
(SIB#n scheduled; valueTag: m+1)
27-m
Non-Essential System Information (Broadcast)
(SIB#n content; valueTag: m+1)
27-n'
Essential System Information (broadcast)
(SIB#n scheduled; valueTag: m+1)
27-m'
Non-Essential System Information (Broadcast)
(SIB#n content; valueTag: m+1)
27-p
Essential System Information (broadcast)
(SIB#n: content: on-demand; valueTag: m+1)

Fig. 27

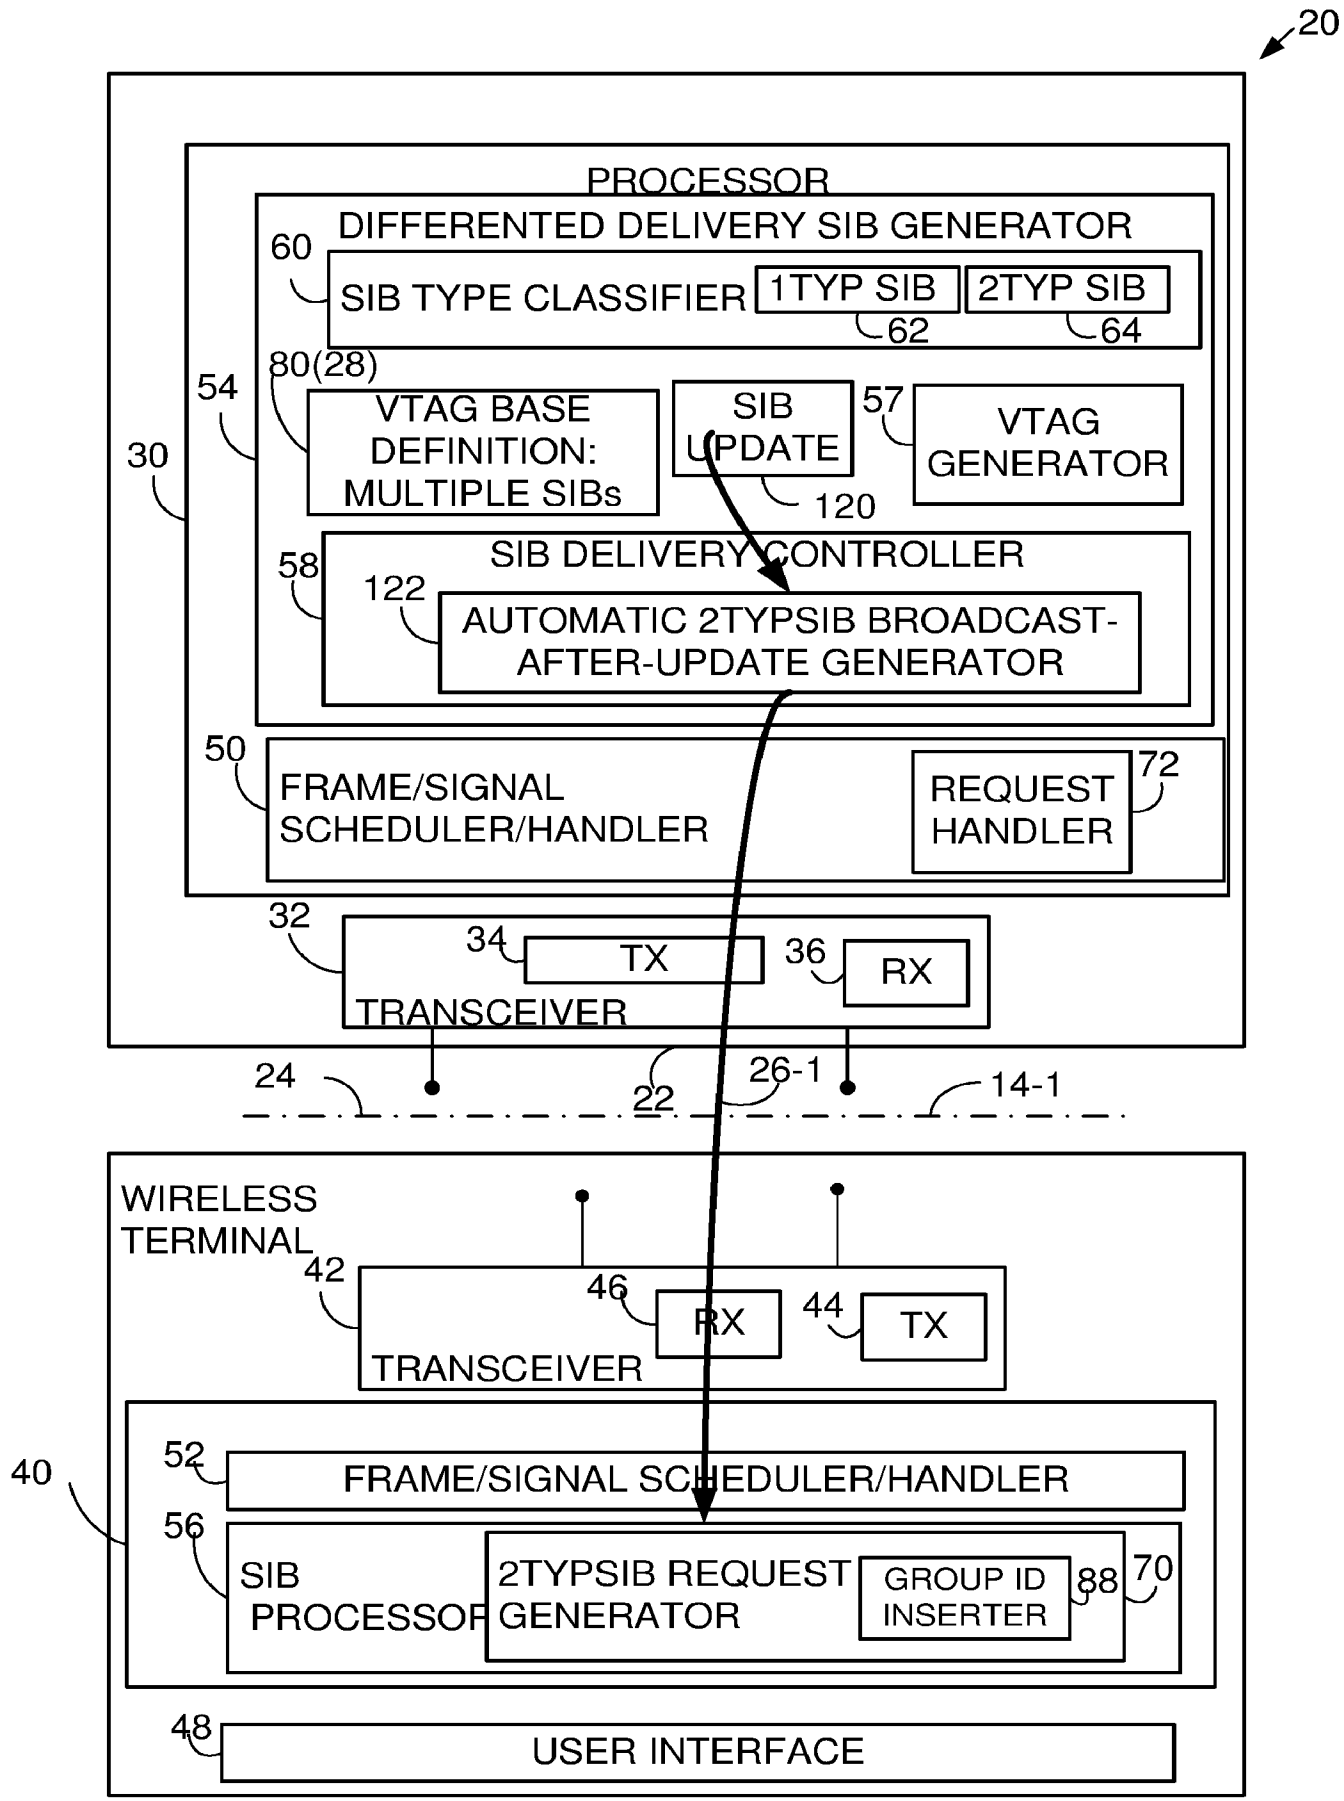

20
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
80(28)
54
VTAG BASE DEFINITION: MULTIPLE SIBs
SIB UPDATE
120
57
VTAG GENERATOR
30
58
SIB DELIVERY CONTROLLER
122
AUTOMATIC 2TYPSIB BROADCAST-AFTER-UPDATE GENERATOR
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
22
26-1
14-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
GROUP ID INSERTER
88
70
48
USER INTERFACE

Fig. 28

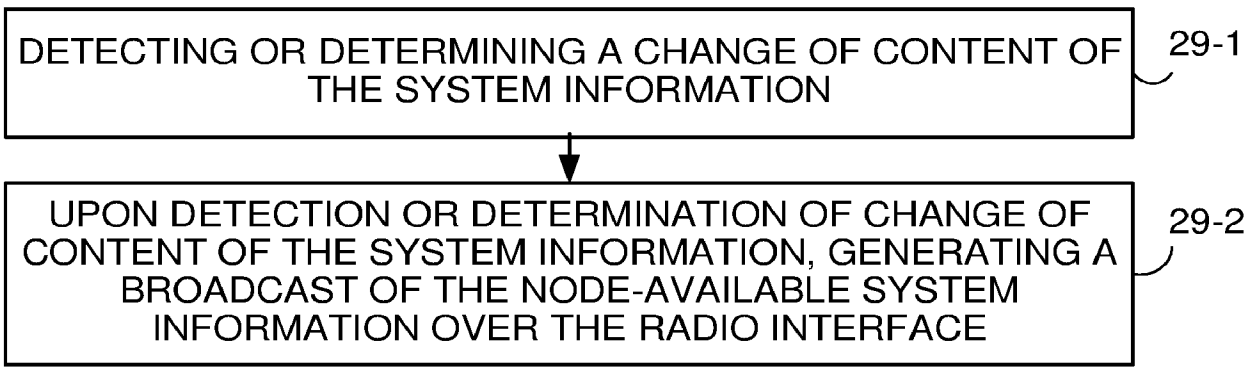

DETECTING OR DETERMINING A CHANGE OF CONTENT OF THE SYSTEM INFORMATION
29-1
UPON DETECTION OR DETERMINATION OF CHANGE OF CONTENT OF THE SYSTEM INFORMATION, GENERATING A BROADCAST OF THE NODE-AVAILABLE SYSTEM INFORMATION OVER THE RADIO INTERFACE
29-2

Fig. 29

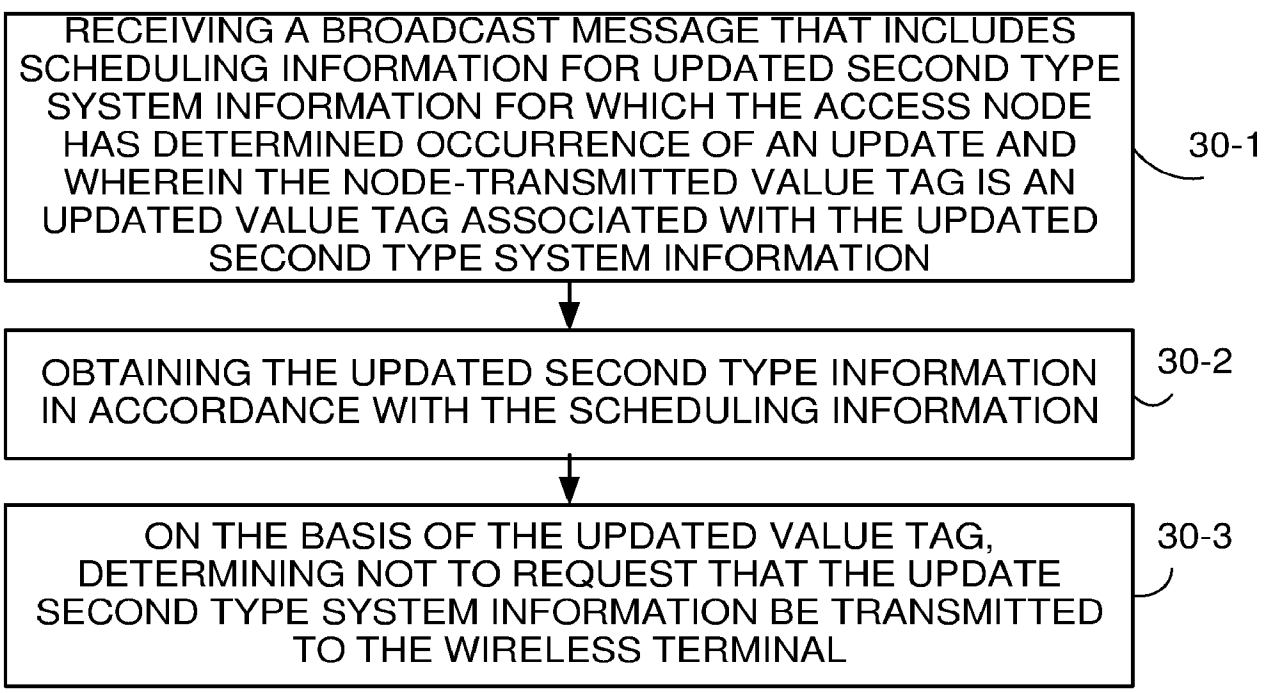

RECEIVING A BROADCAST MESSAGE THAT INCLUDES SCHEDULING INFORMATION FOR UPDATED SECOND TYPE SYSTEM INFORMATION FOR WHICH THE ACCESS NODE HAS DETERMINED OCCURRENCE OF AN UPDATE AND WHEREIN THE NODE-TRANSMITTED VALUE TAG IS AN UPDATED VALUE TAG ASSOCIATED WITH THE UPDATED SECOND TYPE SYSTEM INFORMATION
30-1
OBTAINING THE UPDATED SECOND TYPE INFORMATION IN ACCORDANCE WITH THE SCHEDULING INFORMATION
30-2
ON THE BASIS OF THE UPDATED VALUE TAG, DETERMINING NOT TO REQUEST THAT THE UPDATE SECOND TYPE SYSTEM INFORMATION BE TRANSMITTED TO THE WIRELESS TERMINAL
30-3

Fig. 30

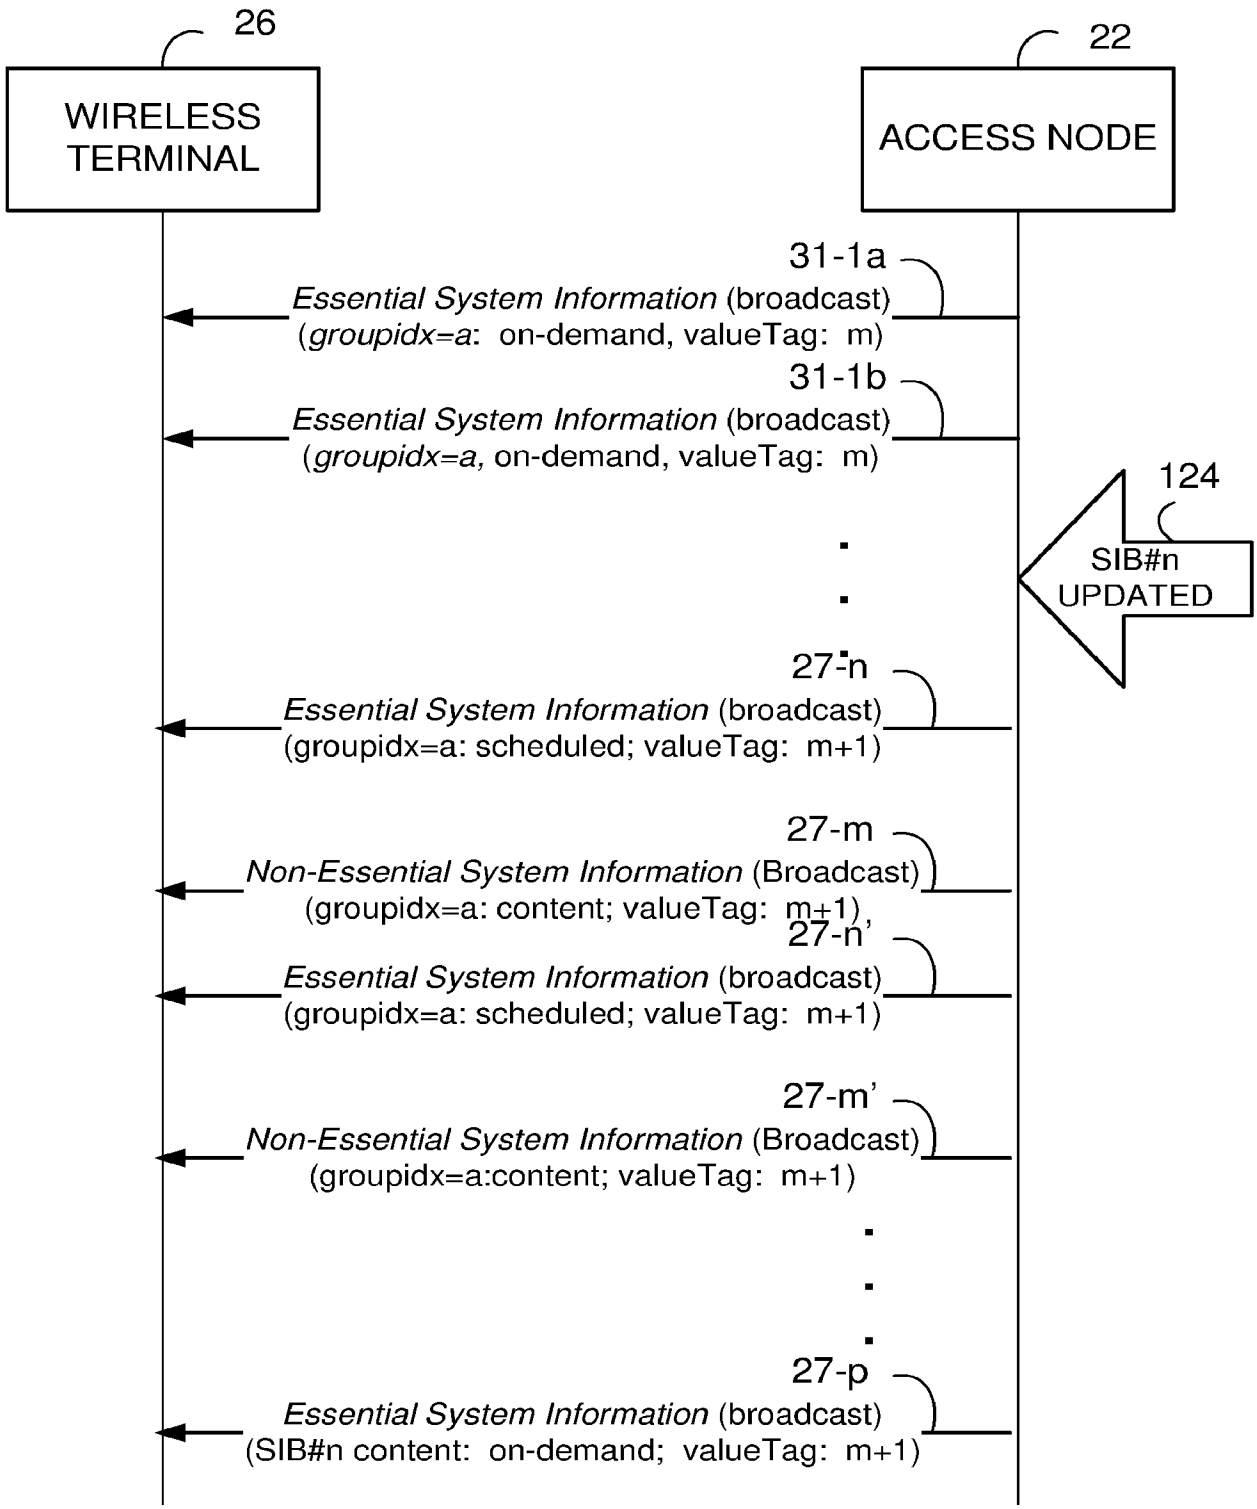

26
WIRELESS TERMINAL
22
ACCESS NODE
31-1a
Essential System Information (broadcast)
(groupidx=a: on-demand, valueTag: m)
31-1b
Essential System Information (broadcast)
(groupidx=a, on-demand, valueTag: m)
124
SIB#n UPDATED
27-n
Essential System Information (broadcast)
(groupidx=a: scheduled; valueTag: m+1)
27-m
Non-Essential System Information (Broadcast)
(groupidx=a: content; valueTag: m+1),
27-n'
Essential System Information (broadcast)
(groupidx=a: scheduled; valueTag: m+1)
27-m'
Non-Essential System Information (Broadcast)
(groupidx=a:content; valueTag: m+1)
27-p
Essential System Information (broadcast)
(SIB#n content: on-demand; valueTag: m+1)

Fig. 31

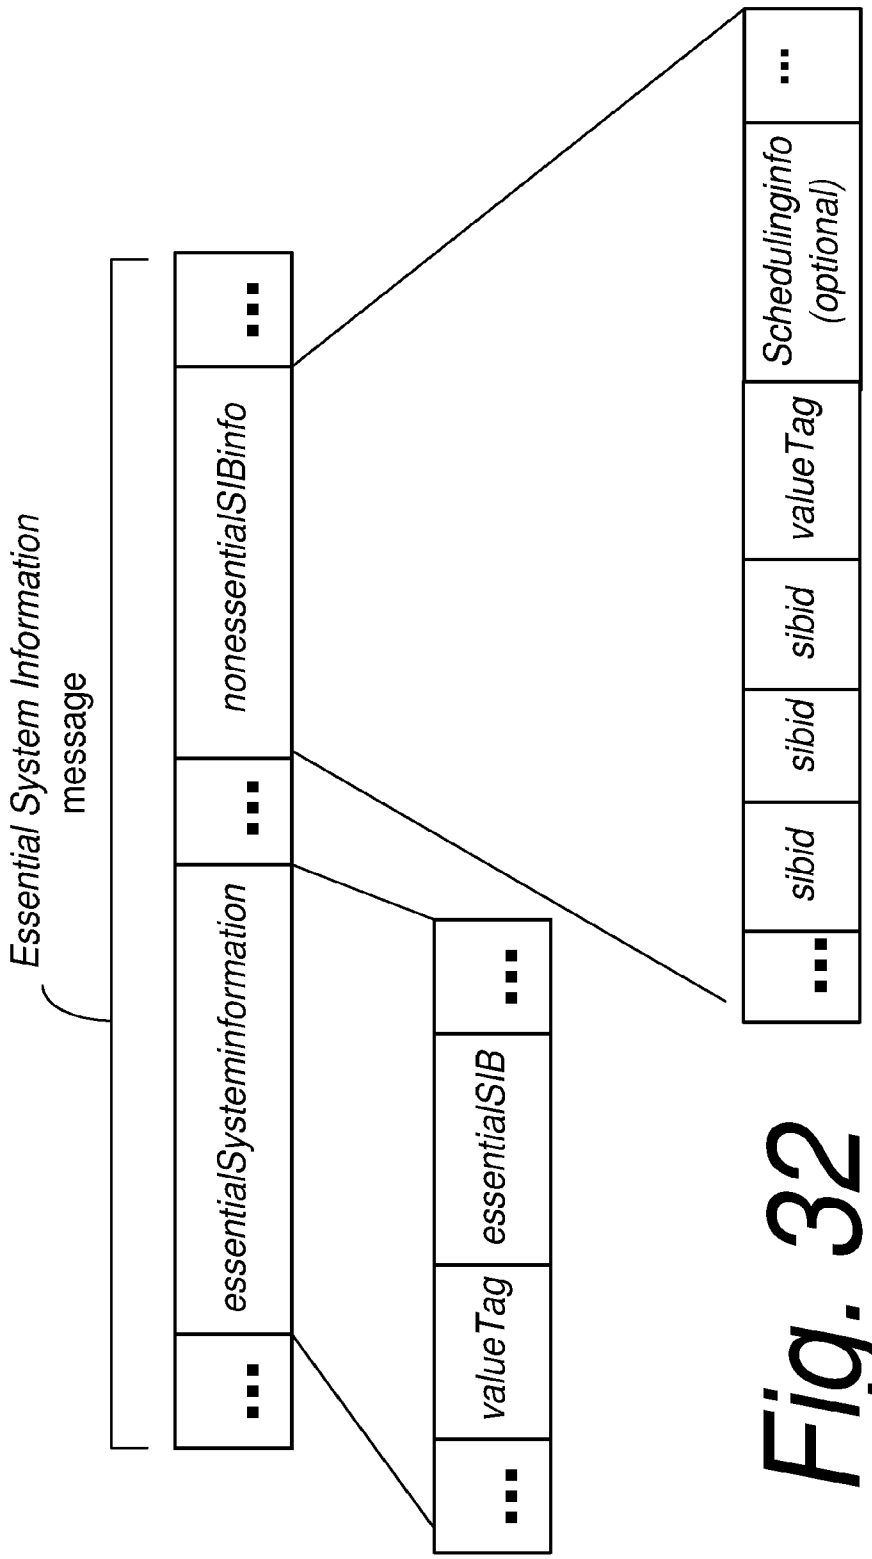

Essential System Information message
...
essentialSysteminformation
...
nonessentialSIBinfo
...
...
valueTag
essentialSIB
...
...
sibid
sibid
sibid
valueTag
Schedulinginfo (optional)
...

Fig. 32

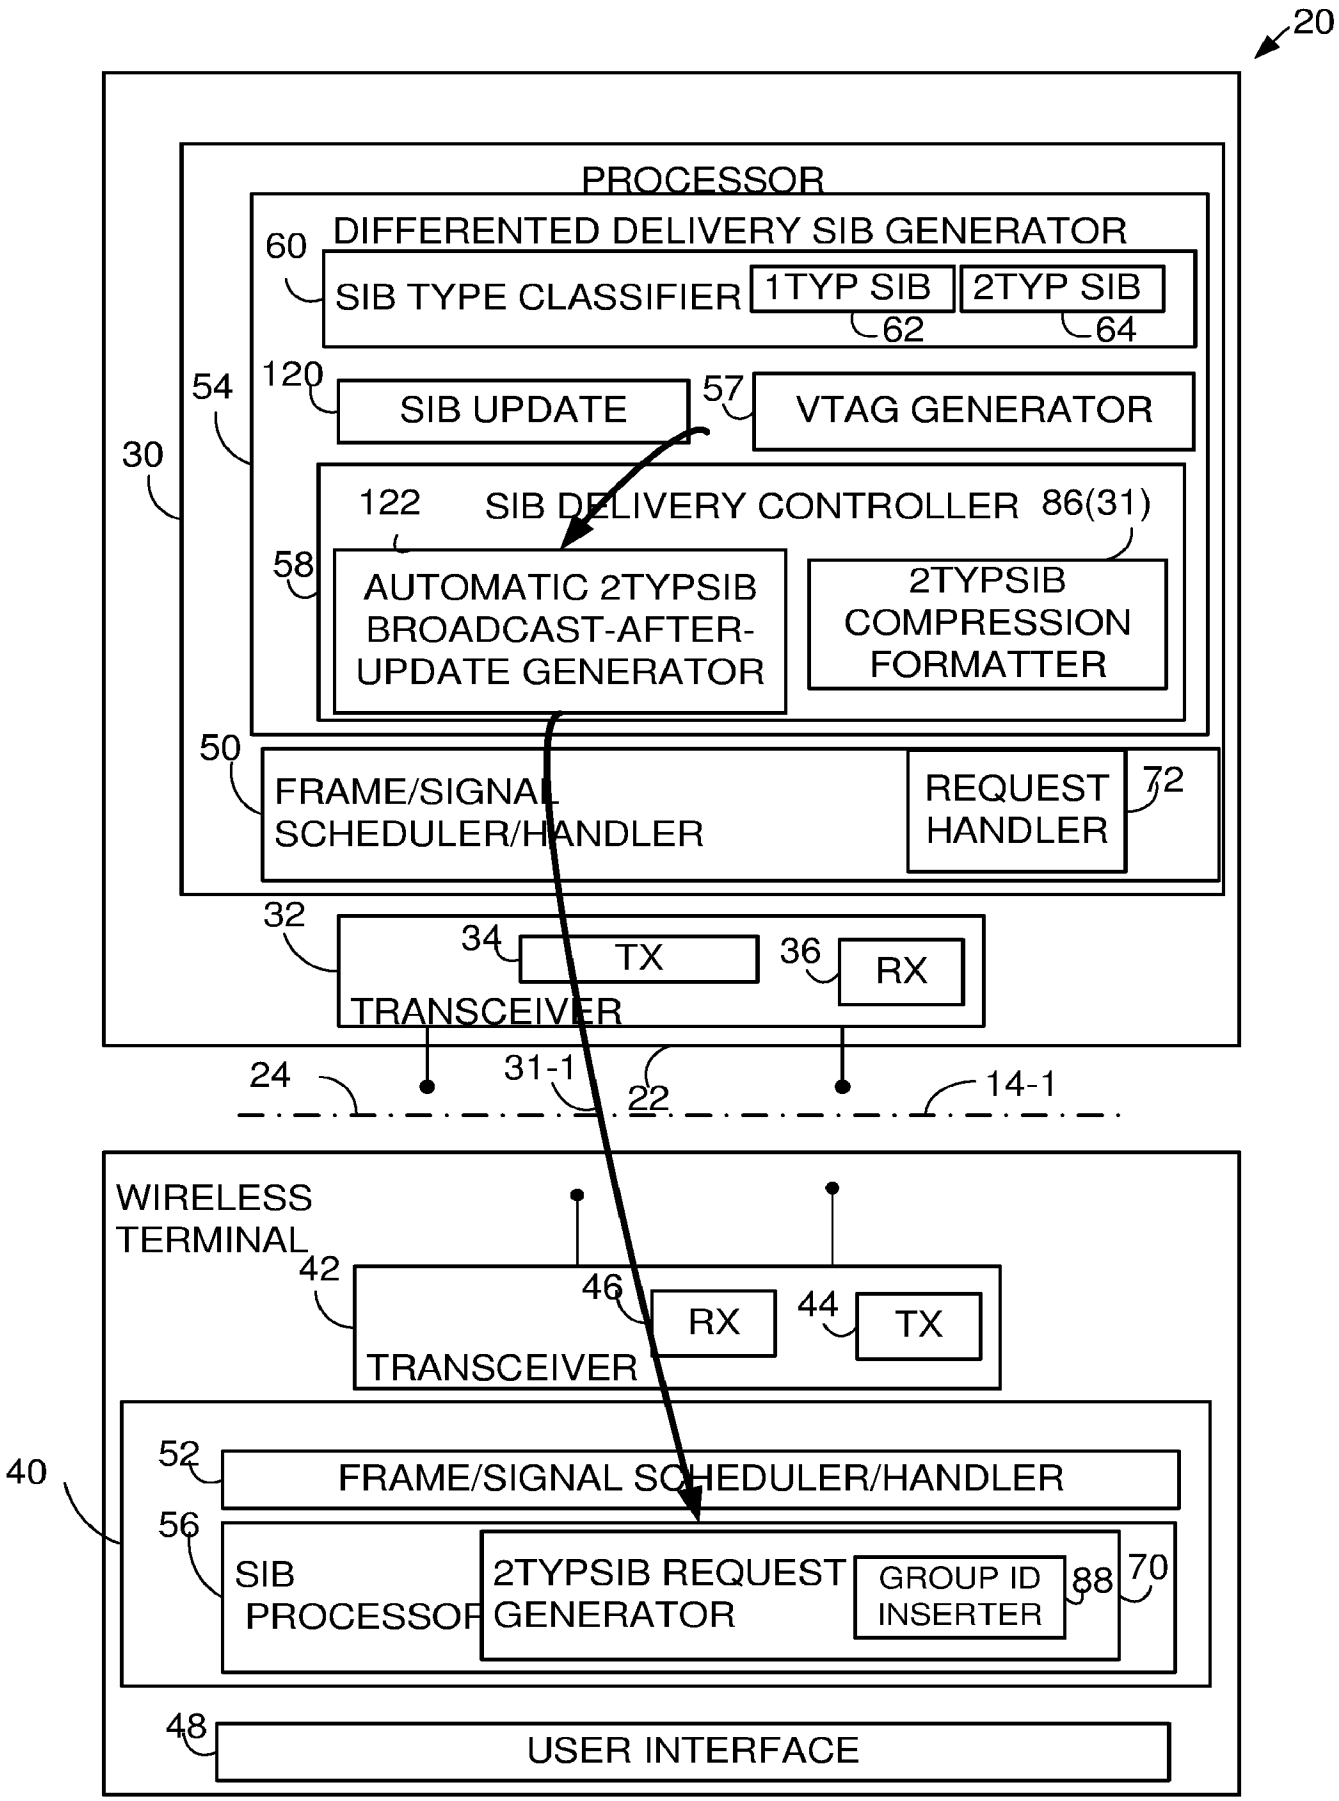

20
PROCESSOR
DIFFERENTED DELIVERY SIB GENERATOR
60
SIB TYPE CLASSIFIER
1TYP SIB
62
2TYP SIB
64
54
120
SIB UPDATE
57
VTAG GENERATOR
30
122
SIB DELIVERY CONTROLLER
86(31)
58
AUTOMATIC 2TYPSIB BROADCAST-AFTER-UPDATE GENERATOR
2TYPSIB COMPRESSION FORMATTER
50
FRAME/SIGNAL SCHEDULER/HANDLER
REQUEST HANDLER
72
32
34
TX
36
RX
TRANSCEIVER
24
31-1
22
14-1
WIRELESS TERMINAL
42
46
RX
44
TX
TRANSCEIVER
40
52
FRAME/SIGNAL SCHEDULER/HANDLER
56
SIB PROCESSOR
2TYPSIB REQUEST GENERATOR
GROUP ID INSERTER
88
70
48
USER INTERFACE

Fig. 33

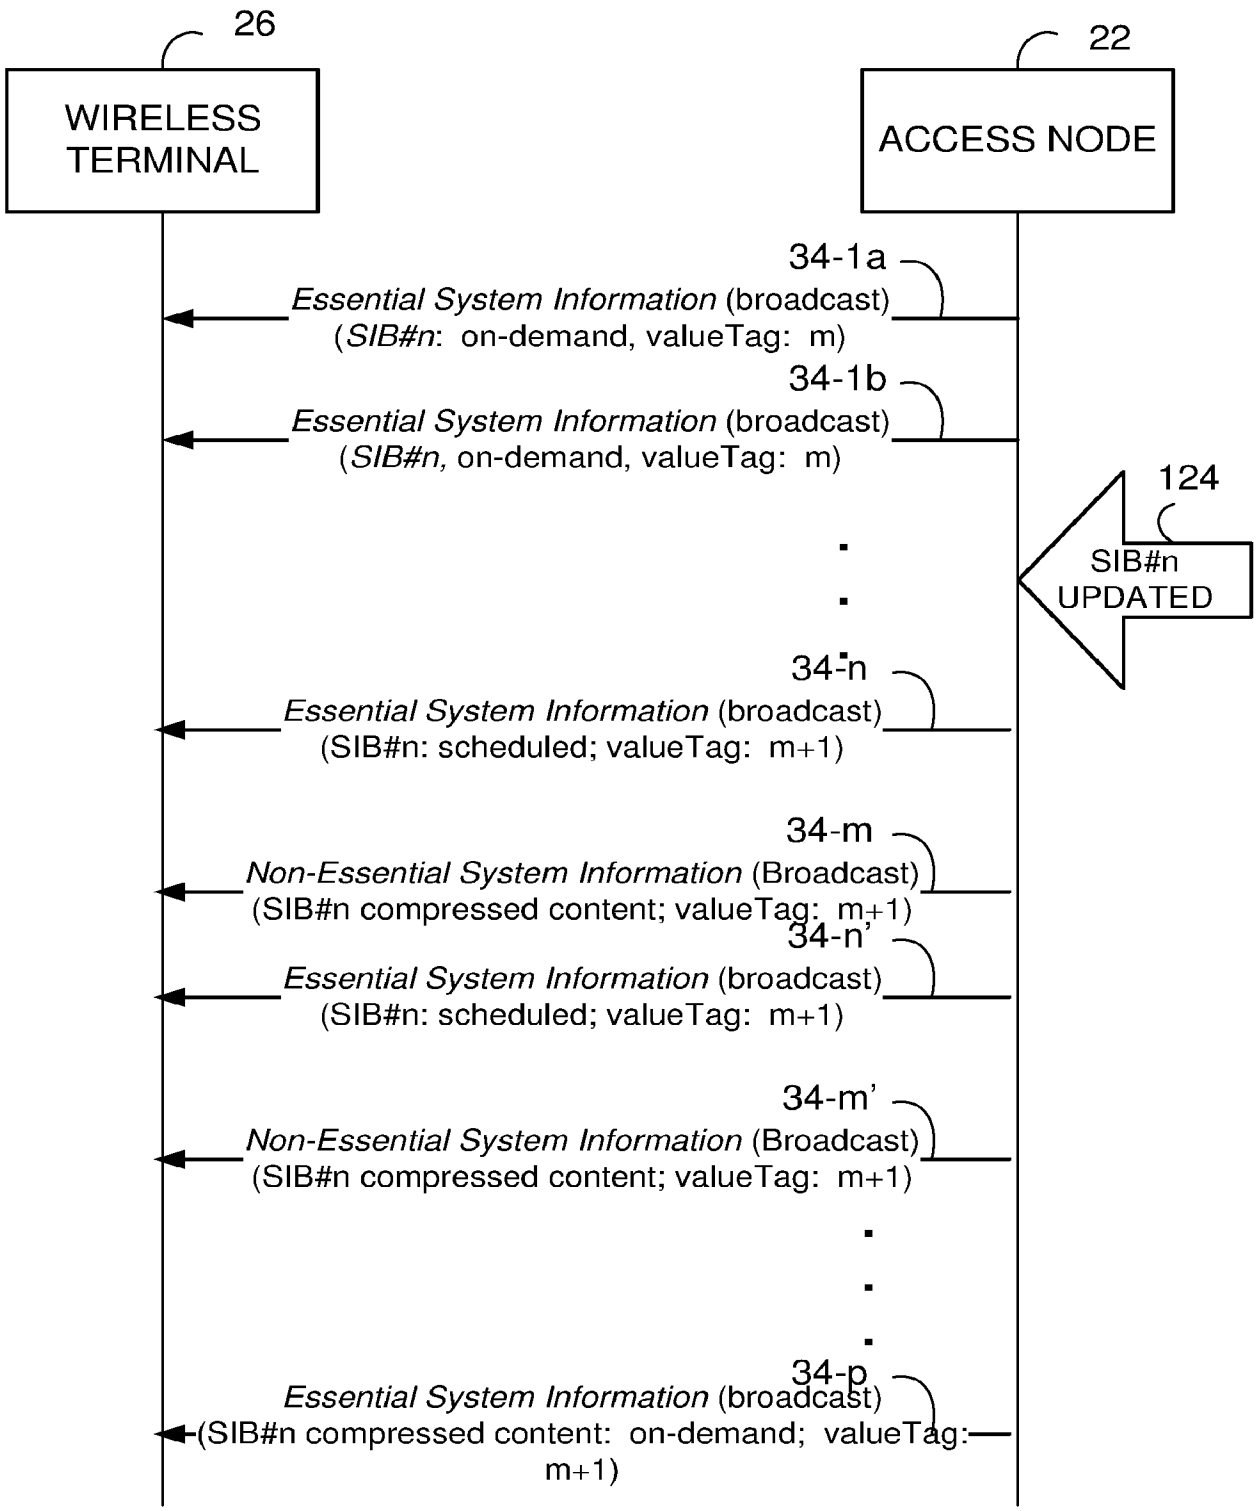

26
WIRELESS TERMINAL
22
ACCESS NODE
34-1a
Essential System Information (broadcast)
(SIB#n: on-demand, valueTag: m)
34-1b
Essential System Information (broadcast)
(SIB#n, on-demand, valueTag: m)
124
SIB#n UPDATED
34-n
Essential System Information (broadcast)
(SIB#n: scheduled; valueTag: m+1)
34-m
Non-Essential System Information (Broadcast)
(SIB#n compressed content; valueTag: m+1)
34-n'
Essential System Information (broadcast)
(SIB#n: scheduled; valueTag: m+1)
34-m'
Non-Essential System Information (Broadcast)
(SIB#n compressed content; valueTag: m+1)
34-p
Essential System Information (broadcast)
(SIB#n compressed content: on-demand; valueTag: m+1)

Fig. 34

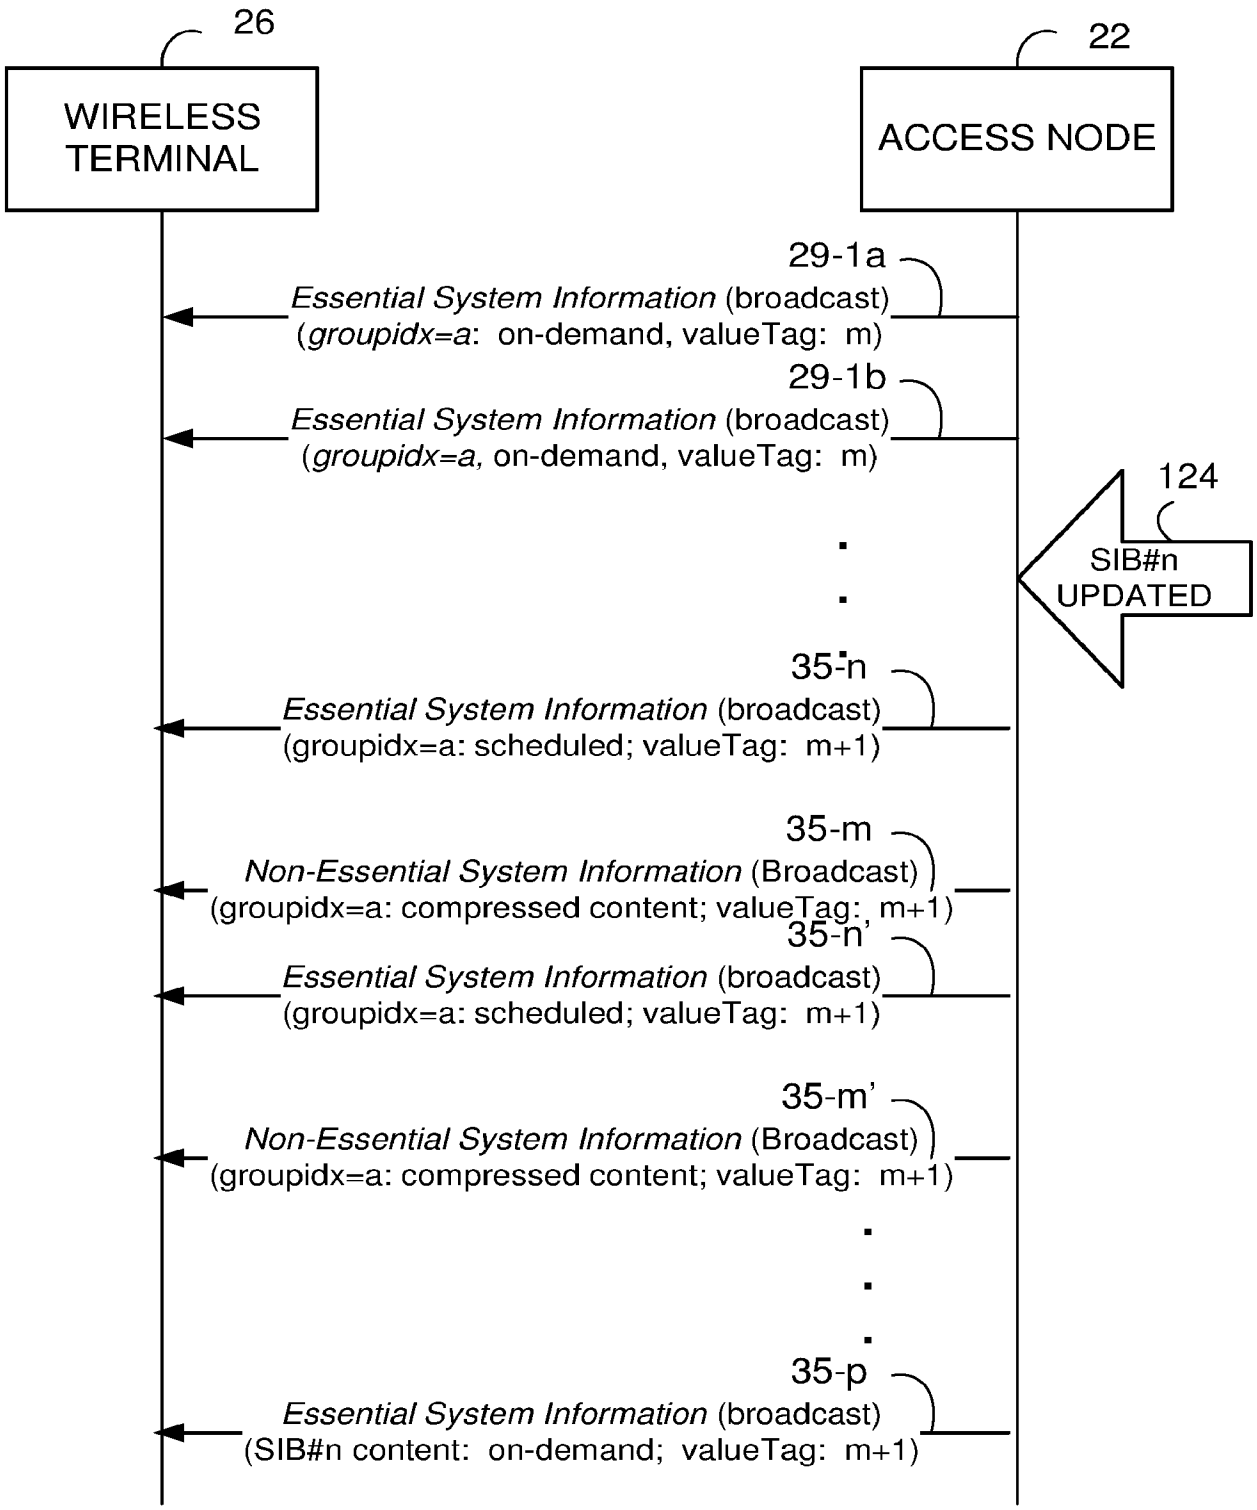

26
WIRELESS TERMINAL
22
ACCESS NODE
29-1a
Essential System Information (broadcast)
(groupidx=a: on-demand, valueTag: m)
29-1b
Essential System Information (broadcast)
(groupidx=a, on-demand, valueTag: m)
124
SIB#n UPDATED
35-n
Essential System Information (broadcast)
(groupidx=a: scheduled; valueTag: m+1)
35-m
Non-Essential System Information (Broadcast)
(groupidx=a: compressed content; valueTag: m+1)
35-n'
Essential System Information (broadcast)
(groupidx=a: scheduled; valueTag: m+1)
35-m'
Non-Essential System Information (Broadcast)
(groupidx=a: compressed content; valueTag: m+1)
35-p
Essential System Information (broadcast)
(SIB#n content: on-demand; valueTag: m+1)

Fig. 35

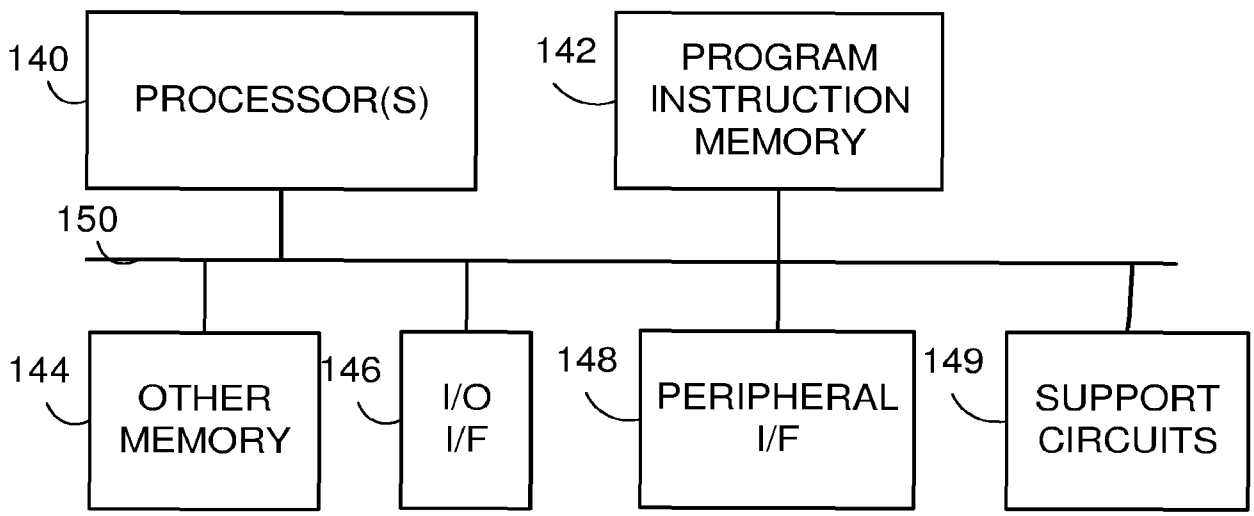

140
PROCESSOR(S)
142
PROGRAM INSTRUCTION MEMORY
150
144
OTHER MEMORY
146
I/O I/F
148
PERIPHERAL I/F
149
SUPPORT CIRCUITS

Fig. 36

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	PATENT APPLICATION
	)	
Inventors: Atsushi Ishii	)	Attorney Docket No. SLA3675
	)	
Serial No.: *(Not yet assigned)*	)	
	)	
Filed: *(Concurrently herewith)*	)	
	)	
Title: Wireless Telecommunications Methods and Apparatus with Automatic Broadcast After Update of System Information	)	
	)	

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

This declaration is directed to:

☒ The attached application; OR

☐ The United States Application or PCT International application number assigned the above-identified "Serial No."; filed on the above-identified "Filed" date.

The above-identified application was made or authorized to be made by me.

I believe I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

Full name of sole inventor: Atsushi Ishii

Residence: Vancouver, WA

Post Office Address: 8611 NW 18th Avenue, Vancouver, WA 98665

Inventor's Signature: _____

Date: 7/25/2017

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.
This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.

Secrecy Order 37 CFR 5.2:

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Inventor Information:

Inventor 1 — Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Atsushi		ISHII	

Residence Information (Select One) ● US Residency Non US Residency Active US Military Service

City	State/Province	Country of Residence
Vancouver	WA	US

Mailing Address of Inventor:

Address 1	8611 NW 18th Avenue
Address 2	

City	State/Province	Postal Code	Country
Vancouver	WA	98665	US

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the **Add** button. Add

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below.
For further information see 37 CFR 1.33(a).

☐ **An Address is being provided for the correspondence Information of this application.**

Customer Number	23117		
Email Address		Add Email	Remove Email

Application Information:

Title of the Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL		
Attorney Docket Number	161083_1US_1035-1394	Small Entity Status Claimed	☐
Application Type	Nonprovisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	31	Suggested Figure for Publication (if any)	

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

Filing By Reference:

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)

☐ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32).
Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	● Customer Number	US Patent Practitioner	○ Limited Recognition (37 CFR 11.9)
Customer Number	23117		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, 365(c), or 386(c) or indicate National Stage entry from a PCT application. Providing benefit claim information in the Application Data Sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.
When referring to the current application, please leave the "Application Number" field blank.

Prior Application Status	Pending		Remove
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Continuation of	15659060	2017-07-25

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

Prior Application Status	Expired		Remove
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
15659060	Claims benefit of provisional	62368126	2016-07-28
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button.			Add

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55. When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)[i] the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(i)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

			Remove
Application Number	Country[i]	Filing Date (YYYY-MM-DD)	Access Code[i] (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the **Add** button.			Add

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.
NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

Authorization or Opt-Out of Authorization to Permit Access:

When this Application Data Sheet is properly signed and filed with the application, applicant has provided written authority to permit a participating foreign intellectual property (IP) office access to the instant application-as-filed (see paragraph A in subsection 1 below) and the European Patent Office (EPO) access to any search results from the instant application (see paragraph B in subsection 1 below).

Should applicant choose not to provide an authorization identified in subsection 1 below, applicant **must opt-out** of the authorization by checking the corresponding box A or B or both in subsection 2 below.

NOTE: This section of the Application Data Sheet is **ONLY** reviewed and processed with the **INITIAL** filing of an application. After the initial filing of an application, an Application Data Sheet cannot be used to provide or rescind authorization for access by a foreign IP office(s). Instead, Form PTO/SB/39 or PTO/SB/69 must be used as appropriate.

1. Authorization to Permit Access by a Foreign Intellectual Property Office(s)

A. Priority Document Exchange (PDX) - Unless box A in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the State Intellectual Property Office of the People's Republic of China (SIPO), the World Intellectual Property Organization (WIPO), and any other foreign intellectual property office participating with the USPTO in a bilateral or multilateral priority document exchange agreement in which a foreign application claiming priority to the instant patent application is filed, access to: (1) the instant patent application-as-filed and its related bibliographic data, (2) any foreign or domestic application to which priority or benefit is claimed by the instant application and its related bibliographic data, and (3) the date of filing of this Authorization. See 37 CFR 1.14(h)(1).

B. Search Results from U.S. Application to EPO - Unless box B in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the EPO access to the bibliographic data and search results from the instant patent application when a European patent application claiming priority to the instant patent application is filed. See 37 CFR 1.14(h)(2).

The applicant is reminded that the EPO's Rule 141(1) EPC (European Patent Convention) requires applicants to submit a copy of search results from the instant application without delay in a European patent application that claims priority to the instant application.

2. Opt-Out of Authorizations to Permit Access by a Foreign Intellectual Property Office(s)

☐ A. Applicant **DOES NOT** authorize the USPTO to permit a participating foreign IP office access to the instant application-as-filed. If this box is checked, the USPTO will not be providing a participating foreign IP office with any documents and information identified in subsection 1A above.

☐ B. Applicant **DOES NOT** authorize the USPTO to transmit to the EPO any search results from the instant patent application. If this box is checked, the USPTO will not be providing the EPO with search results from the instant application.

NOTE: Once the application has published or is otherwise publicly available, the USPTO may provide access to the application in accordance with 37 CFR 1.14.

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant 1 — Remove

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

Clear

● Assignee	Legal Representative under 35 U.S.C. 117	Joint Inventor
Person to whom the inventor is obligated to assign.	Person who shows sufficient proprietary interest	

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor:

If the Applicant is an Organization check here. ☒

Organization Name	SHARP KABUSHIKI KAISHA		
Mailing Address Information For Applicant:			
Address 1	1 Takumi-cho, Sakai-ku		
Address 2			
City	Sakai City, Osaka	**State/Province**	
Country	JP	Postal Code	590-8522
Phone Number		Fax Number	
Email Address			

Additional Applicant Data may be generated within this form by selecting the Add button. Add

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

Assignee 1

Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.

Remove

If the Assignee or Non-Applicant Assignee is an Organization check here. ☐

Prefix	**Given Name**	Middle Name	**Family Name**	Suffix

Mailing Address Information For Assignee including Non-Applicant Assignee:

Address 1			
Address 2			
City		**State/Province**	
Country i		Postal Code	
Phone Number		Fax Number	
Email Address			

Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button. Add

Remove

Signature:

NOTE: This Application Data Sheet must be signed in accordance with 37 CFR 1.33(b). **However, if this Application Data Sheet is submitted with the INITIAL filing of the application and either box A or B is not checked in subsection 2 of the "Authorization or Opt-Out of Authorization to Permit Access" section, then this form must also be signed in accordance with 37 CFR 1.14(c).**

This Application Data Sheet **must** be signed by a patent practitioner if one or more of the applicants is a **juristic entity** (e.g., corporation or association). If the applicant is two or more joint inventors, this form must be signed by a patent practitioner, **all** joint inventors who are the applicant, or one or more joint inventor-applicants who have been given power of attorney (e.g., see USPTO Form PTO/AIA/81) on behalf of **all** joint inventor-applicants.

See 37 CFR 1.4(d) for the manner of making signatures and certifications.

Signature	/H. Warren Burnam, Jr./			Date (YYYY-MM-DD)	2019-10-09
First Name	H. Warren	Last Name	Burnam, Jr.	Registration Number	29366

Additional Signature may be generated within this form by selecting the Add button. Add

PTO/AIA/14 (02-18)
Approved for use through 11/30/2020. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1 The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.

2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.

3 A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.

4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).

5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent CooperationTreaty.

6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).

7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.

8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.

9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82B (07-13)
Approved for use through 01/31/2018. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)

☑ I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above: 23117

OR

☐ I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:

☑ The address associated with the above-mentioned Customer Number

OR

☐ The address associated with Customer Number:

OR

☐ Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box):

SHARP KABUSHIKI KAISHA

☐ Inventor or Joint Inventor (title not required below)

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)

☑ Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)

☐ Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature	Mototaka Taneya	Date (Optional)	
Name	Mototaka TANEYA		
Title	Managing Officer, BU President, Corporate Research & Development BU; Sharp Kabushiki Kaisha		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.

☐ Total of forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

STATEMENT UNDER 37 CFR 3.73(c)

Applicant / Patent Owner: Sharp Kabushiki Kaisha

Application No. / Patent No. To be assigned / Filed/Issue Date: October 9. 2019 /

Titled: **AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL**

Sharp Kabushiki Kaisha , a coporation
(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that, for the patent application/patent identified above, it is (choose **one** of options 1, 2, 3 or 4 below):

1. ☒ The assignee of the entire right, title, and interest in;

2. ☐ An assignee of less than the entire right, title, and interest in
   - ☐ The extent (by percentage) of its ownership interest is %. Additional Statement(s) by the owners holding the balance of the interest must be submitted to account for 100% of the ownership interest.
   - ☐ There are unspecified percentages of ownership. The other parties, including inventors, who together own the entire right, title and interest are:
     Additional Statement(s) by the owners holding the balance of the interest must be submitted to account for 100% of the ownership interest.

3. ☐ The assignee of an undivided interest in the entirety (a complete assignment from one of the joint inventors was made). The other parties, including inventors, who together own the entire right, title, and interest are:

   Additional Statement(s) by the owners holding the balance of the interest must be submitted to account for 100% of the ownership interest.

4. ☐ The recipient, via a court proceeding or the like (e.g., bankruptcy, probate), of an undivided interest in the entirety (a complete transfer of ownership interest was made). The certified document(s) showing the transfer is attached.

The interest identified in option 1, 2 or 3 above (not option 4) is evidenced by either:

A. ☐ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the United States Patent and Trademark Office at Reel , Frame , or for which a copy thereof is attached.

OR

B. ☒ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as follows:

1. From: ISHII To: SHARP Laboratories of America, Inc.
   The document was recorded in the United States Patent and Trademark Office at Reel 043101, Frame 0816, or for which a copy thereof is attached.
2. From: SHARP Laboratories of America, Inc. To: Sharp Kabushiki Kaisha
   The document was recorded in the United States Patent and Trademark Office at Reel 048887, Frame 0146, or for which a copy thereof is attached.
3. From: To:
   The document was recorded in the United States Patent and Trademark Office at Reel , Frame , or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet(s).

☒ As required by 37 C.F.R. § 3.73(c)(1)(i), the documentary evidence of the chain of title from the original owner to the assignee was, or concurrently is being, submitted for recordation pursuant to 37 C.F.R. § 3.11.

[NOTE: A separate copy (*i.e.*, a true copy of the original assignment document(s)) must be submitted to Assignment Division in accordance with 37 CFR Part 3, to record the assignment in the records of the USPTO. See MPEP 302.08]

The undersigned (whose title is supplied below) is authorized to act on behalf of the assignee.

/H. Warren Burnam, Jr./	October 9, 2019
Signature	Date
H. Warren Burnam, Jr.	29,366
Printed or Typed Name	Title or Registration Number

Doc Code: PA
Document Description: Power of Attorney

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5, unless the application number and filing date are identified in the Power of Attorney by Applicant form. If neither form PTO/AIA/82A nor form PTO/AIA82B identifies the application to which the Power of Attorney is directed, the Power of Attorney will not be recognized in the application.

Application Number	To be assigned
Filing Date	October 9, 2019
First Named Inventor	ISHII, Atsushi
Title	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
Art Unit	To Be Assigned
Examiner Name	To Be Assigned
Attorney Docket Number	161083_1US_1035-1394

SIGNATURE of Applicant or Patent Practitioner

Signature	/H. Warren Burnam, Jr./	Date (Optional)	October 9, 2019
Name	H. Warren Burnam, Jr.	Registration Number	29,366
Title (if Applicant is a juristic entity)			
Applicant Name (if Applicant is a juristic entity)			

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications. If more than one applicant, use multiple forms.

*Total of 1 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS.
SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
16/597,325	10/09/2019		2180	161083_1US_1035-1394	6	4

CONFIRMATION NO. 6587

23117
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

FILING RECEIPT

OC000000112134859

Date Mailed: 10/28/2019

Receipt is acknowledged of this non-provisional utility patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF FIRST INVENTOR, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection.

Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please submit a written request for a corrected Filing Receipt, including a properly marked-up ADS showing the changes with strike-through for deletions and underlining for additions. If you received a "Notice to File Missing Parts" or other Notice requiring a response for this application, please submit any request for correction to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections provided that the request is grantable.

Inventor(s)

Atsushi ISHII, Vancouver, WA;

Applicant(s)

SHARP KABUSHIKI KAISHA, Sakai City, JAPAN;

Power of Attorney: The patent practitioners associated with Customer Number 23117

Domestic Priority data as claimed by applicant

This application is a CON of 15/659,060 07/25/2017 PAT 10462823
which claims benefit of 62/368,126 07/28/2016

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see http://www.uspto.gov for more information.) - None.
Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access Application via Priority Document Exchange: Yes

Permission to Access Search Results: Yes

Applicant may provide or rescind an authorization for access using Form PTO/SB/39 or Form PTO/SB/69 as appropriate.

If Required, Foreign Filing License Granted: 10/24/2019

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 16/597,325**

Projected Publication Date: 02/06/2020

Non-Publication Request: No

Early Publication Request: No
Title

ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

Preliminary Class

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop technology, manufacture products, deliver services, and grow your business, visit http://www.SelectUSA.gov or call +1-202-482-6800.

PATENT APPLICATION FEE DETERMINATION RECORD

Substitute for Form PTO-875

Application or Docket Number: 16/597,325

APPLICATION AS FILED - PART I

FOR	(Column 1) NUMBER FILED	(Column 2) NUMBER EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY FEE($)
BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A	N/A			N/A	300
SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A	N/A			N/A	660
EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A	N/A			N/A	760
TOTAL CLAIMS (37 CFR 1.16(i))	6 minus 20 =	*			OR	x 100 =	0.00
INDEPENDENT CLAIMS (37 CFR 1.16(h))	4 minus 3 =	* 1				x 460 =	460
APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is $310 ($155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).						0.00
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))							0.00
* If the difference in column 1 is less than zero, enter "0" in column 2.			TOTAL			TOTAL	2180

APPLICATION AS AMENDED - PART II

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY ADDITIONAL FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY ADDITIONAL FEE($)
AMENDMENT A	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

		(Column 1) CLAIMS REMAINING AFTER AMENDMENT		(Column 2) HIGHEST NUMBER PREVIOUSLY PAID FOR	(Column 3) PRESENT EXTRA	SMALL ENTITY RATE($)	SMALL ENTITY ADDITIONAL FEE($)	OR	OTHER THAN SMALL ENTITY RATE($)	OTHER THAN SMALL ENTITY ADDITIONAL FEE($)
AMENDMENT B	Total (37 CFR 1.16(i))	*	Minus	**	=	x =		OR	x =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=	x =		OR	x =	
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							OR		
						TOTAL ADD'L FEE		OR	TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.

** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".

*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".

The "Highest Number Previously Paid For" (Total or Independent) is the highest found in the appropriate box in column 1.

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Oct 28, 2019 03:42:35 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	APP.FILE.REC	10/28/2019	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

23117 7590 12/10/2019

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

EXAMINER
HONG, DUNG

ART UNIT	PAPER NUMBER
2643	

NOTIFICATION DATE	DELIVERY MODE
12/10/2019	ELECTRONIC

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Notice of the Office communication was sent electronically on above-indicated "Notification Date" to the following e-mail address(es):

PTOMAIL@nixonvan.com
pair_nixon@firsttofile.com

DAINGEAN_0001718

Office Action Summary	Application No. 16/597,325	Applicant(s) ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	AIA (FITF) Status Yes

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTHS FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

1)☑ Responsive to communication(s) filed on 10/9/2019.

☐ A declaration(s)/affidavit(s) under **37 CFR 1.130(b)** was/were filed on _____.

2a)☐ This action is **FINAL.** 2b) ☑ This action is non-final.

3)☐ An election was made by the applicant in response to a restriction requirement set forth during the interview on _____; the restriction requirement and election have been incorporated into this action.

4)☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims*

5) ☑ Claim(s) 1-6 is/are pending in the application.

5a) Of the above claim(s) _____ is/are withdrawn from consideration.

6) ☐ Claim(s) _____ is/are allowed.

7) ☑ Claim(s) 1-6 is/are rejected.

8) ☐ Claim(s) _____ is/are objected to.

9) ☐ Claim(s) _____ are subject to restriction and/or election requirement

* If any claims have been determined allowable, you may be eligible to benefit from the **Patent Prosecution Highway** program at a participating intellectual property office for the corresponding application. For more information, please see http://www.uspto.gov/patents/init_events/pph/index.jsp or send an inquiry to **PPHfeedback@uspto.gov.**

Application Papers

10)☐ The specification is objected to by the Examiner.

11)☐ The drawing(s) filed on _____ is/are: a)☐ accepted or b)☐ objected to by the Examiner.

Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).

Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).

Priority under 35 U.S.C. § 119

12)☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

Certified copies:

a)☐ All b)☐ Some** c)☐ None of the:

1.☐ Certified copies of the priority documents have been received.

2.☐ Certified copies of the priority documents have been received in Application No. _____.

3.☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

** See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

1) ☑ Notice of References Cited (PTO-892)

2) ☑ Information Disclosure Statement(s) (PTO/SB/08a and/or PTO/SB/08b) Paper No(s)/Mail Date _____.

3) ☐ Interview Summary (PTO-413) Paper No(s)/Mail Date _____.

4) ☐ Other: _____.

DETAILED ACTION

This is in response to applicant's communication filed on 10/09/2019, wherein:

Claim 1-6 are pending.

Notice of Pre-AIA or AIA Status

The present application, filed on or after March 16, 2013, is being examined under the first inventor to file provisions of the AIA.

Double Patenting

The nonstatutory double patenting rejection is based on a judicially created doctrine grounded in public policy (a policy reflected in the statute) so as to prevent the unjustified or improper timewise extension of the "right to exclude" granted by a patent and to prevent possible harassment by multiple assignees. A nonstatutory double patenting rejection is appropriate where the conflicting claims are not identical, but at least one examined application claim is not patentably distinct from the reference claim(s) because the examined application claim is either anticipated by, or would have been obvious over, the reference claim(s). See, e.g., *In re Berg*, 140 F.3d 1428, 46 USPQ2d 1226 (Fed. Cir. 1998); *In re Goodman*, 11 F.3d 1046, 29 USPQ2d 2010 (Fed. Cir. 1993); *In re Longi*, 759 F.2d 887, 225 USPQ 645 (Fed. Cir. 1985); *In re Van Ornum*, 686 F.2d 937,

214 USPQ 761 (CCPA 1982); *In re Vogel*, 422 F.2d 438, 164 USPQ 619 (CCPA 1970); *In re Thorington*, 418 F.2d 528, 163 USPQ 644 (CCPA 1969).

A timely filed terminal disclaimer in compliance with 37 CFR 1.321(c) or 1.321(d) may be used to overcome an actual or provisional rejection based on nonstatutory double patenting provided the reference application or patent either is shown to be commonly owned with the examined application, or claims an invention made as a result of activities undertaken within the scope of a joint research agreement. See MPEP § 717.02 for applications subject to examination under the first inventor to file provisions of the AIA as explained in MPEP § 2159. See MPEP §§ 706.02(l)(1) - 706.02(l)(3) for applications not subject to examination under the first inventor to file provisions of the AIA. A terminal disclaimer must be signed in compliance with 37 CFR 1.321(b).

The USPTO Internet website contains terminal disclaimer forms which may be used. Please visit www.uspto.gov/patent/patents-forms. The filing date of the application in which the form is filed determines what form (e.g., PTO/SB/25, PTO/SB/26, PTO/AIA/25, or PTO/AIA/26) should be used. A web-based eTerminal Disclaimer may be filled out completely online using web-screens. An eTerminal Disclaimer that meets all requirements is auto-processed and approved immediately upon submission. For more information about eTerminal Disclaimers, refer to www.uspto.gov/patents/process/file/efs/guidance/eTD-info-I.jsp.

Claim 1-6 are rejected on the ground of nonstatutory double patenting as being unpatentable over claim 1 and 6 of U.S. Patent No. US 10462823 B2 in view of Kubota et al. (US 20160234759 A1).

US 10462823 B2	16597325
1. An access node of a radio access network that communicates over a radio interface with a wireless terminal, the access node comprising: processor circuitry configured:	1. An access node of a radio access network that communicates over a radio interface with a wireless terminal, the access node comprising: processor circuitry configured:
to include, in a first type system information message, one or more indications, each of the indications indicating whether one or more associated second type system information blocks are broadcasted or to be provided on-demand, the first type system information message comprising first type system information, the first type system	to generate a first type system information block (SIB) comprising information and a value tags, the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the

information being required for the wireless terminal to perform an initial access to the radio access network, and;	wireless terminal to perform an initial access to the radio access network;
upon a change of content of a second type system information block whose associated indication indicating that the second type system information block was provided on-demand before the change, to include in the first type system information message an indication associated with the second type system information block indicating that the second type system information block is broadcast;	upon a change of a second type SIB whose associated information indicating that the second type SIB was provided on-demand before the change, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;
transmitter circuitry configured to periodically transmit, over the radio interface, the first type system information message and to transmit	transmitter circuitry configured to: transmit the first type SIB;

the second type system information block. 6. The access node of claim 1, wherein prior to the change of content of the second type system information block the transmitter circuitry is configured to transmit a separate signaling that triggers the wireless terminal to receive the first type system information.	transmit a message that triggers the wireless terminal to receive the first type SIB **(see claim 6 of US 10462823 B2)** <u>wherein; whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.</u> 2. The access node of claim 1, wherein the transmitter circuitry is further configured to transmit the second type SIB by broadcast after the change **(claim 1 of US 10462823**

	B2 indicate the second type of SIB is broadcasted upon the change of content).

Claim 1 and 6 of US 10462823 B2 disclose the invention of claim 1-2, however, does not explicitly discloses limitation wherein whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

Kubota discloses determining not to request system information from the access node based on the value tag **(Fig. 6, par. 0173, 0360).**

Therefore, it would have been obvious to one having ordinary skill in the art before effective filing date the invention was made to modify the invention of 1 and 6-7 of US 10462823 B2, and have system information request when necessary, as taught by Kubota because doing so would apply a known technique to a known device (method, or product) ready for improvement to yield predictable results (MPEP §2141 -III) to reduce unnecessary traffic.

Regarding **claim 3-4**, the scope and content of the claims recites a method performed by the access node of claim 1-2, therefore, being addressed as claim 1-2.

Regarding **claim 5-6**, the scope and content of the claim recite a wireless terminal and a method perform by the wireless terminal configured to operate with the access node of claim 1-2, therefore, being addressed as in claim 1.

Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103 which forms the basis for all obviousness rejections set forth in this Office action:

> A patent for a claimed invention may not be obtained, notwithstanding that the claimed invention is not identically disclosed as set forth in section 102, if the differences between the claimed invention and the prior art are such that the claimed invention as a whole would have been obvious before the effective filing date of the claimed invention to a person having ordinary skill in the art to which the claimed invention pertains. Patentability shall not be negated by the manner in which the invention was made.

The factual inquiries set forth in *Graham v. John Deere Co.*, 383 U.S. 1, 148 USPQ 459 (1966), that are applied for establishing a background for determining obviousness under 35 U.S.C. 103 are summarized as follows:

1. Determining the scope and contents of the prior art.

2. Ascertaining the differences between the prior art and the claims at issue.

3. Resolving the level of ordinary skill in the pertinent art.

4. Considering objective evidence present in the application indicating obviousness or nonobviousness.

Claim 1-6 are rejected under 35 U.S.C. 103 as being unpatentable over **Shi** et al. (US 20150223148 A1) in view of **Schliwa-Bertling** et al. (US 20180049024 A1) and **Kubota** et al. (US 20160234759 A1).

Regarding **claim 1**, Shi discloses an access node of a radio access network that communicates over a radio interface with a wireless terminal **(Fig. 1 – Network entity 104, Fig. 9 – Node B 910 communicating with user equipment 102)**, the access node comprising: processor circuitry **(Fig. 1 - Network entity 104, Fig. 9 – Node B 910 comprising processor 940)** configured:

to generate a first type system information block (SIB) comprising information and a value tags, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network **(par. 0028-0029 disclose UE receiving SIB/MIB broadcasted by network entity 104 – i.e. the access node generate and**

transmitting the first type SIB - including parameter indicating change of SIB and scheduling information number of SIB segment including scheduling information for subsequent segment of SIB discussed in par. 0022, 0028, 0039, 0046, table 1);

upon a change of a second type SIB, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast; transmitter circuitry configured to: transmit the first type SIB **(par. 0028, 0031, 0046, 0039 - "the one or more MIBs or SIBs can include scheduling information for a given SIB (e.g. a subsequent SIB) from which the SIB size can be determined. The scheduling information may include, for example a number of segments in the given SIB. Thus, in one example, SIB size determining component 110 can determine that a number of segments for the SIB, as specified in one or more prior MIBs or SIBs, is different than that stored by UE 102 for the given SIB (e.g., in a stored MIB or a stored SIB). In this case, SIB processing component 118 can determine to receive and/or process the given SIB in signaling from the network entity 104").**

However, the reference is silent on details about **(1)** transmit a message that triggers the wireless terminal to receive the first type SIB **(2)** a second type SIB whose associated information indicating that the second type SIB was provided on-demand before the change, a first type system

information block (SIB) including the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand; wherein; whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

Schliwa-Bertling discloses transmiting a message that triggers the wireless terminal to receive the first type SIB **(par. 0020 discloses transmitting paging message indicating that UE shall start to receive broadcast system information).**

Therefore, it would have been obvious to one having ordinary skill in the art before effective filing date the invention was made to modify the invention of Shi, and have mechanism for triggering UE to receive broadcast system information, as taught by Schliwa-Bertling because doing so would make use of known technique to improve similar devices (methods, or products) in the same way (MPEP §2141 -III) to ensure UE receiving system information.

Kubota discloses determining not to request system information from the access node based on the value tag provided in the first system information **(Fig. 6, par. 0173, 0360)**.

Therefore, it would have been obvious to one having ordinary skill in the art before effective filing date the invention was made to modify the

invention of Shi and Schliwa-Bertling, and have system information request when necessary, as taught by Kubota because doing so would apply a known technique to a known device (method, or product) ready for improvement to yield predictable results (MPEP §2141 -III) to reduce unnecessary traffic.

Regarding **claim 2**, the combined teaching of Shi, Schliwa-Bertling, and Kubota discloses the access node of claim 1, wherein the transmitter circuitry is further configured to transmit the second type SIB by broadcast after the change **(Shi - Fig. 2, par. 0028-0029 – disclose UE receiving SIB/MIB broadcasted by network entity 104 – i.e. the access node generate and transmitting the first type SIB - including parameter indicating change of SIB and scheduling information number of SIB segment including scheduling information for subsequent segment of SIB discussed in par. 0022, 0028, 0039, 0046, table 1).**

Regarding **claim 3-4**, the scope and content of the claims recite a method performed by the access node of claim 1-2, therefore, being addressed as claim 1-2.

Regarding **claim 5-6**, the scope and content of the claim recite a wireless terminal and a method perform by the wireless terminal

configured to operate with the access node of claim 1, therefore, being addressed as in claim 1.

Contact Information

Any inquiry concerning this communication or earlier communications from the examiner should be directed to DUNG HONG whose telephone number is (571)270-7928. The examiner can normally be reached on Monday-Friday from 8:00 am to 5:00 pm.

Examiner interviews are available via telephone, in-person, and video conferencing using a USPTO supplied web-based collaboration tool. To schedule an interview, Applicant is encouraged to use the USPTO Automated Interview Request (AIR) at http://www.uspto.gov/interviewpractice.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, JINSONG HU, can be reached on (571) 272-3965. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

/DUNG HONG/
Primary Examiner, Art Unit 2643

Notice of References Cited	Application/Control No. 16/597,325	Applicant(s)/Patent Under Reexamination ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	Page 1 of 1

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-20180049024-A1	02-2018	Schliwa-Bertling; Paul	H04W8/30	1/1
*	B	US-20150223148-A1	08-2015	SHI; Yongsheng	H04W48/10	370/312
*	C	US-20160234759-A1	08-2016	Kubota; Keiichi	H04W48/14	1/1
	D					
	E					
	F					
	G					
	H					
	I					
	J					
	K					
	L					
	M					

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Index of Claims	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

✓	Rejected	-	Cancelled	N	Non-Elected	A	Appeal
=	Allowed	÷	Restricted	I	Interference	O	Objected

CLAIMS

☐ Claims renumbered in the same order as presented by applicant ☐ CPA ☐ T.D. ☐ R.1.47

CLAIM		DATE								
Final	Original	12/05/2019								
	1	✓								
	2	✓								
	3	✓								
	4	✓								
	5	✓								
	6	✓								

Search Notes	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	Art Unit
	DUNG HONG	2643

CPC - Searched*		
Symbol	Date	Examiner
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

CPC Combination Sets - Searched*		
Symbol	Date	Examiner
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

US Classification - Searched*			
Class	Subclass	Date	Examiner

* See search history printout included with this form or the SEARCH NOTES box below to determine the scope of the search.

Search Notes		
Search Notes	Date	Examiner
Inventor search, Google search, CPC search, Text search	12/04/2019	DH

Interference Search			
US Class/CPC Symbol	US Subclass/CPC Group	Date	Examiner

/DUNG HONG/ Primary Examiner, Art Unit 2643	

INFORMATION DISCLOSURE CITATION

(Use several sheets if necessary)

ATTY. DOCKET NO.	APPLICATION NO.
161083_1US_1035-1394	To be assigned
INVENTOR(S)	
ISHII	
FILING DATE	**ART UNIT**
October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE
		2018/0110036	4-2018	Tabet			
		8,837,404	9-2014	Cha			
		8,379,567	2-2013	Cho			
		2018/0132165	5-208	Takahashi			
		2009/0221293	9-2009	Petrovic			
		2015/0223148	8-2015	Shi			
		2016/0234759	8-0216	Kubota			
		2016/0150506	5/2016	Tabet			
		2016/0143017	5/2016	Yang			
		2015/0334766	11-2015	Lee			
		2010/0227611	9-2010	Schmidt			
		2015/0223148	8-2015	Qualcomm Incorporated			
		2016/0150506	5-2016	Apple Inc.			
		2009/0262693	10-2009	Wang et al.			
		8,538,444	9-2013	Lee et al.			
		2018/0035468	2-2018	Ishii			

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2015/143244 A1	9-2015	WIPO/PCT				
		WO 2008/044664 A1	4-2008	PCT				
		2 816 741 A2	12-2014	EP				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Notice of Allowance mailed April 19, 2019 in U.S. Patent Application 15/658,980
		Allowed Claims from U.S. Patent Application 15/658,980
		International Preliminary Report on Patentability mailed January 29, 2019 in PCT Application No. PCT/US17/43587
		International Search Report and Written Opinion mailed October 6, 2017 in PCT Application No. PCT/US17/43587
		R2-163853, 3GPP TSG-RAN WG2 Meeting #94, ETRI, "System information handling in NR", Nanjing, China, 23rd – 27th May 2016
		R2-163743, 3GPP TSG-RAN WG2 Meeting #94, ZTE, "Consideration on the System Information in NR", Nanjing, P.R. China, 23th – 27th May 2016
		R2-163586, 3GPP TSG-RAN WG2 Meeting #94, Intel Corporation, "System information for standalone NR deployment", Nanjing, China, 23 - 27 May 2016
		R2-163470, 3GPP TSG RAN WG2 Meeting #94, CATT, "System information in NR", Nanjing, China, May 23rd – 27th, 2016
		R2-163371, 3GPP TSG-RAN WG2 Meeting #94, Samsung, "System Information Signalling Design in NR", Nanjing, China, 23-27 May 2016
		R2-164127, 3GPP TSG-RAN2 Meeting #94, Huawei, HiSilicon, "System information design", Nanjing, China, 23 - 27 May, 2016
		R2-164122, 3GPP TSG-RAN WG2 Meeting #94, Qualcomm Incorporated, Convida Wireless, "NR System Information Provisioning", Nanjing, China 23rd – 27th May 2016

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /D.H/

2954744

INFORMATION DISCLOSURE CITATION	ATTY. DOCKET NO.	APPLICATION NO.
	161083_1US_1035-1394	To be assigned
	INVENTOR(S)	
	ISHII	
(Use several sheets if necessary)	FILING DATE	ART UNIT
	October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Tdoc R2-164088, 3GPP TSG-RAN WG2 #94, InterDigital Communications, "System Information Acquisition for New Radio Access", Nanjing, China, May 23rd – 27th, 2016
		R2-164078, 3GPP TSG-RAN WG2 #94 R2-164078, LG Electronics Inc., "Observations about on-demand SI delivery mechanism", Nanjing, China, 23 – 27 May, 2016
		R2-164067, 3GPP TSG-RAN WG2 Meeting #94, Convida Wireless, "NR System Information Aspects", Nanjing, China, 23rd – 27th May 2016
		Tdoc R2-164006, 3GPP TSG-RAN WG2 #94, Ericsson, "Requirements for System Information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		Tdoc R2-163997, 3GPP TSG-RAN WG2 #94, Ericsson, "Solution principles for system information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		R2-163980, 3GPP TSG RAN WG2 Meeting #94, NEC, "System information on demand in standalone NR", Nanjing, China, 23rd -27th May 2016
		R2-163977, 3GPP TSG RAN WG2 Meeting #94, Sony, "System Information Enhancements for NR", Nanjing, China, 23 - 27 May 2016
		R2-163975, 3GPP TSG-RAN WG2 #94, NTT DOCOMO, INC., "System Information design for standalone NR operation", Nanjing, China, 23th – 27th May 2016
		Office Action mailed September 26, 2018 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed February 21, 2019 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed June 17, 2019 in U.S. Patent Application 15/659,060

*Examiner	/DUNG HONG/	Date Considered	12/04/2019

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /D.H/

2954744

INFORMATION DISCLOSURE CITATION

(Use several sheets if necessary)

ATTY. DOCKET NO.	APPLICATION NO.
161083_1US_1035-1394	To be assigned
INVENTOR(S)	
ISHII	
FILING DATE	**ART UNIT**
October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE
		2018/0110036	4-2018	Tabet			
		8,837,404	9-2014	Cha			
		8,379,567	2-2013	Cho			
		2018/0132165	5-208	Takahashi			
		2009/0221293	9-2009	Petrovic			
		2015/0223148	8-2015	Shi			
		2016/0234759	8-0216	Kubota			
		2016/0150506	5/2016	Tabet			
		2016/0143017	5/2016	Yang			
		2015/0334766	11-2015	Lee			
		2010/0227611	9-2010	Schmidt			
		2015/0223148	8-2015	Qualcomm Incorporated			
		2016/0150506	5-2016	Apple Inc.			
		2009/0262693	10-2009	Wang et al.			
		8,538,444	9-2013	Lee et al.			
		2018/0035468	2-2018	Ishii			

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2015/143244 A1	9-2015	WIPO/PCT				
		WO 2008/044664 A1	4-2008	PCT				
		2 816 741 A2	12-2014	EP				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Notice of Allowance mailed April 19, 2019 in U.S. Patent Application 15/658,980
		Allowed Claims from U.S. Patent Application 15/658,980
		International Preliminary Report on Patentability mailed January 29, 2019 in PCT Application No. PCT/US17/43587
		International Search Report and Written Opinion mailed October 6, 2017 in PCT Application No. PCT/US17/43587
		R2-163853, 3GPP TSG-RAN WG2 Meeting #94, ETRI, "System information handling in NR", Nanjing, China, 23rd – 27th May 2016
		R2-163743, 3GPP TSG-RAN WG2 Meeting #94, ZTE, "Consideration on the System Information in NR", Nanjing, P.R. China, 23th – 27th May 2016
		R2-163586, 3GPP TSG-RAN WG2 Meeting #94, Intel Corporation, "System information for standalone NR deployment", Nanjing, China, 23 - 27 May 2016
		R2-163470, 3GPP TSG RAN WG2 Meeting #94, CATT, "System information in NR", Nanjing, China, May 23rd – 27th, 2016
		R2-163371, 3GPP TSG-RAN WG2 Meeting #94, Samsung, "System Information Signalling Design in NR", Nanjing, China, 23-27 May 2016
		R2-164127, 3GPP TSG-RAN2 Meeting #94, Huawei, HiSilicon, "System information design", Nanjing, China, 23 - 27 May, 2016
		R2-164122, 3GPP TSG-RAN WG2 Meeting #94, Qualcomm Incorporated, Convida Wireless, "NR System Information Provisioning", Nanjing, China 23rd – 27th May 2016

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /D.H/

2954744

INFORMATION DISCLOSURE CITATION	ATTY. DOCKET NO.	APPLICATION NO.
	161083_1US_1035-1394	To be assigned
	INVENTOR(S)	
	ISHII	
(Use several sheets if necessary)	FILING DATE	ART UNIT
	October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Tdoc R2-164088, 3GPP TSG-RAN WG2 #94, InterDigital Communications, "System Information Acquisition for New Radio Access", Nanjing, China, May 23rd – 27th, 2016
		R2-164078, 3GPP TSG-RAN WG2 #94 R2-164078, LG Electronics Inc., "Observations about on-demand SI delivery mechanism", Nanjing, China, 23 – 27 May, 2016
		R2-164067, 3GPP TSG-RAN WG2 Meeting #94, Convida Wireless, "NR System Information Aspects", Nanjing, China, 23rd – 27th May 2016
		Tdoc R2-164006, 3GPP TSG-RAN WG2 #94, Ericsson, "Requirements for System Information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		Tdoc R2-163997, 3GPP TSG-RAN WG2 #94, Ericsson, "Solution principles for system information distribution", Nanjing, P.R. China, 23rd – 27th May 2016
		R2-163980, 3GPP TSG RAN WG2 Meeting #94, NEC, "System information on demand in standalone NR", Nanjing, China, 23rd -27th May 2016
		R2-163977, 3GPP TSG RAN WG2 Meeting #94, Sony, "System Information Enhancements for NR", Nanjing, China, 23 - 27 May 2016
		R2-163975, 3GPP TSG-RAN WG2 #94, NTT DOCOMO, INC., "System Information design for standalone NR operation", Nanjing, China, 23th – 27th May 2016
		Office Action mailed September 26, 2018 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed February 21, 2019 in U.S. Patent Application 15/659,060
		Notice of Allowance mailed June 17, 2019 in U.S. Patent Application 15/659,060

*Examiner	/DUNG HONG/	Date Considered	12/04/2019

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /D.H/

2954744

Bibliographic Data

Application No: 16/597,325

Foreign Priority claimed: ○ Yes ◉ No

35 USC 119 (a-d) conditions met: ☐ Yes ☑ No ☐ Met After Allowance

Verified and Acknowledged: /DUNG HONG/ (Examiner's Signature) | (Initials)

Title: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

FILING or 371(c) DATE	CLASS	GROUP ART UNIT	ATTORNEY DOCKET NO.
10/09/2019	370	2643	161083_1US_1035-1394
RULE			

APPLICANTS

SHARP KABUSHIKI KAISHA, Sakai City, JAPAN

INVENTORS

Atsushi ISHII Vancouver, WA, UNITED STATES

CONTINUING DATA

This application is a CON of 15659060 07/25/2017 PAT 10462823

15659060 has PRO of 62368126 07/28/2016

FOREIGN APPLICATIONS

IF REQUIRED, FOREIGN LICENSE GRANTED**

10/24/2019

STATE OR COUNTRY

UNITED STATES

ADDRESS

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

FILING FEE RECEIVED

$2,180

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Dec 10, 2019 03:34:37 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	CTNF	12/10/2019	161083_1US_1035-1394
	892	12/10/2019	161083_1US_1035-1394
	1449	12/10/2019	161083_1US_1035-1394
	1449	12/10/2019	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394

CONFIRMATION NO. 6587

23117
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

PUBLICATION NOTICE



Title:ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

Publication No.US-2020-0045747-A1
Publication Date:02/06/2020

NOTICE OF PUBLICATION OF APPLICATION

The above-identified application will be electronically published as a patent application publication pursuant to 37 CFR 1.211, et seq. The patent application publication number and publication date are set forth above.

The publication may be accessed through the USPTO's publically available Searchable Databases via the Internet at www.uspto.gov. The direct link to access the publication is currently http://www.uspto.gov/patft/.

The publication process established by the Office does not provide for mailing a copy of the publication to applicant. A copy of the publication may be obtained from the Office upon payment of the appropriate fee set forth in 37 CFR 1.19(a)(1). Orders for copies of patent application publications are handled by the USPTO's Public Records Division. The Public Records Division can be reached by telephone at (571) 272-3150 or (800) 972-6382, by facsimile at (571) 273-3250, by mail addressed to the United States Patent and Trademark Office, Public Records Division, Alexandria, VA 22313-1450 or via the Internet.

In addition, information on the status of the application, including the mailing date of Office actions and the dates of receipt of correspondence filed in the Office, may also be accessed via the Internet through the Patent Electronic Business Center at www.uspto.gov using the public side of the Patent Application Information and Retrieval (PAIR) system. The direct link to access this status information is currently https://portal.uspto.gov/pair/PublicPair. Prior to publication, such status information is confidential and may only be obtained by applicant using the private side of PAIR.

Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Office of Data Managment, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101

DAINGEAN_0001742

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Feb 07, 2020 03:29:24 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	NTC.PUB	02/06/2020	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

Doc Code: DIST.E.FILE Document Description: Electronic Terminal Disclaimer - Filed	PTO/SB/26 U.S. Patent and Trademark Office Department of Commerce

Electronic Petition Request	**TERMINAL DISCLAIMER TO OBVIATE A DOUBLE PATENTING REJECTION OVER A "PRIOR" PATENT**
Application Number	16597325
Filing Date	09-Oct-2019
First Named Inventor	Atsushi ISHII
Attorney Docket Number	161083_1US_1035-1394
Title of Invention	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

☒ Filing of terminal disclaimer does not obviate requirement for response under 37 CFR 1.111 to outstanding Office Action

☒ This electronic Terminal Disclaimer is not being used for a Joint Research Agreement.

Owner	Percent Interest
Sharp Kabushiki Kaisha	100%

The owner(s) with percent interest listed above in the instant application hereby disclaims, except as provided below, the terminal part of the statutory term of any patent granted on the instant application which would extend beyond the expiration date of the full statutory term of prior patent number(s)

10462823

as the term of said prior patent is presently shortened by any terminal disclaimer. The owner hereby agrees that any patent so granted on the instant application shall be enforceable only for and during such period that it and the prior patent are commonly owned. This agreement runs with any patent granted on the instant application and is binding upon the grantee, its successors or assigns.

In making the above disclaimer, the owner does not disclaim the terminal part of the term of any patent granted on the instant application that would extend to the expiration date of the full statutory term of the prior patent, "as the term of said prior patent is presently shortened by any terminal disclaimer," in the event that said prior patent later:
- expires for failure to pay a maintenance fee;
- is held unenforceable;
- is found invalid by a court of competent jurisdiction;
- is statutorily disclaimed in whole or terminally disclaimed under 37 CFR 1.321;
- has all claims canceled by a reexamination certificate;
- is reissued; or
- is in any manner terminated prior to the expiration of its full statutory term as presently shortened by any terminal disclaimer.

◉ Terminal disclaimer fee under 37 CFR 1.20(d) is included with Electronic Terminal Disclaimer request.

○ I certify, in accordance with 37 CFR 1.4(d)(4), that the terminal disclaimer fee under 37 CFR 1.20(d) required for this terminal disclaimer has already been paid in the above-identified application.
Applicant claims the following fee status: ○ Small Entity ○ Micro Entity ◉ Regular Undiscounted I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.
THIS PORTION MUST BE COMPLETED BY THE SIGNATORY OR SIGNATORIES I certify, in accordance with 37 CFR 1.4(d)(4) that I am: ◉ An attorney or agent registered to practice before the Patent and Trademark Office who is of record in this application Registration Number 29366 ○ A sole inventor ○ A joint inventor; I certify that I am authorized to sign this submission on behalf of all of the inventors as evidenced by the power of attorney in the application ○ A joint inventor; all of whom are signing this request

Signature	/H. Warren Burnam, Jr./
Name	H. Warren Burnam, Jr.

*Statement under 37 CFR 3.73(b) is required if terminal disclaimer is signed by the assignee (owner).
Form PTO/SB/96 may be used for making this certification. See MPEP § 324.

Electronic Patent Application Fee Transmittal

Application Number:	16597325
Filing Date:	09-Oct-2019
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Filer:	H. Warren Burnam
Attorney Docket Number:	161083_1US_1035-1394

Filed as Large Entity

Filing Fees for Utility under 35 USC 111(a)

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Basic Filing:				
STATUTORY OR TERMINAL DISCLAIMER	1814	1	160	160
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Extension-of-Time:				
Miscellaneous:				
			Total in USD ($)	**160**

Doc Code: DISQ.E.FILE
Document Description: Electronic Terminal Disclaimer – Approved

Application No.: 16597325

Filing Date: 09-Oct-2019

Applicant/Patent under Reexamination: ISHII

Electronic Terminal Disclaimer filed on March 9, 2020

☒ APPROVED

This patent is subject to a terminal disclaimer

☐ DISAPPROVED

Approved/Disapproved by: Electronic Terminal Disclaimer automatically approved by EFS-Web

U.S. Patent and Trademark Office

Electronic Acknowledgement Receipt

EFS ID:	38808568
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	H. Warren Burnam
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	09-MAR-2020
Filing Date:	09-OCT-2019
Time Stamp:	15:30:04
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	$160
RAM confirmation Number	E202039F29592572
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Terminal Disclaimer-Filed (Electronic)	eTerminal-Disclaimer.pdf	33557 fb7dab149b66df606072e7ecc6bb5fcac51029fc	no	2
Warnings:					
Information:					
2	Fee Worksheet (SB06)	fee-info.pdf	30419 811b548f83f67208e506e096a7d183794ca104ec	no	2
Warnings:					
Information:					
		Total Files Size (in bytes):	63976		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of	Atty. Ref.: HWB-1035-1394
ISHII	Confirmation No. 6587
Appl. No. 16/597,325	Art Unit: 2643
Filed: 10/09/2019	Examiner: HONG, DUNG

For: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

* * * * * * * * * * *

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

March 9, 2020

Sir:

AMENDMENT

Responsive to the Official Action dated December 10, 2019, please amend the above-identified application as follows:

Amendments to the Claims are reflected in the listing of claims which begins on page 2.

Remarks/Arguments begin on page 6.

AMENDMENTS TO THE CLAIMS:

This listing of claims will replace all prior versions, and listings, of claims in the application:

1. (Currently Amended) An access node of a radio access network that communicates over a radio interface with a wireless terminal, the access node comprising:

processor circuitry configured:

to generate a first type system information block (SIB) comprising information and a value tag[[s]], the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network;

upon a change of a second type SIB whose associated information indicated before the change ~~indicating~~ that the second type SIB was provided on-demand ~~before the change~~, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;

transmitter circuitry configured to:

transmit the first type SIB;

transmit a message that triggers the wireless terminal to receive the first type SIB, wherein;

whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

2. (Previously Presented) The access node of claim 1, wherein the transmitter circuitry is further configured to transmit the second type SIB by broadcast after the change.

DAINGEAN_0001752

3. (Currently Amended) A method for an access node of a radio access network that communicates over a radio interface with a wireless terminal, the method comprising:

generating a first type system information block (SIB) comprising information and a value tag[[s]], the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network;

upon a change of a second type SIB whose associated information ~~indicating~~ indicated before the change that the second type SIB was provided on-demand ~~before the change~~, including in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;

transmitting the first type SIB;

transmitting a message that triggers the wireless terminal to receive the first type SIB, wherein;

whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

4. (Previously Presented) The method of claim 3, further comprising transmitting the second type SIB by broadcast after the change.

5. (Currently Amended) A wireless terminal of a radio access network that communicates over a radio interface with an access node of the radio access network comprising:

receiver circuitry configured to:

receive a message that triggers reception of a first type system information block (SIB); and

~~the receiver configured to~~ receive, based on the reception of the message, the first type SIB comprising information and a value tag, the information indicating

DAINGEAN_0001753

whether one or more associated second type SIBs are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being used to perform an initial access to the radio access network~~,~~; and~~,~~

processor circuitry configured to determine that a second type SIB has changed, based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB~~,~~ ~~wherein~~;

wherein the receiver circuitry is configured to perform reception of the second type SIB based on the information associated with the second type system information block, in a case that the second type SIB has changed; and

wherein in a case that the second type SIB was provided on-demand before the change, the information associated with the second type SIB included in the first type SIB indicates that the second type SIB is provided by broadcast.

6. (Currently Amended) A method for a wireless terminal of a radio access network that communicates over a radio interface with an access node of the radio access network, the method comprising:

receiving a message that triggers reception of a first type system information block (SIB);

receiving, based on the reception of the message, the first type SIB comprising information and a value tag, the information indicating whether one or more associated second type SIBs are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being used to perform an initial access to the radio access network~~, and~~;

determining that a second type SIB has changed, based on a value tag, associated with the second type SIB, stored in the wireless terminal, and the value tag included in the first type SIB corresponding to the second type SIB~~, wherein~~;

DAINGEAN_0001754

wherein reception of the second type SIB is performed based on the information associated with the second type system information block, in a case that the second type SIB has changed; and

wherein in a case that the second type SIB was provided on-demand before the change, the information associated with the second type SIB included in the first type SIB indicates that the second type SIB is provided by broadcast .

DAINGEAN_0001755

REMARKS/ARGUMENTS

Reconsideration of the captioned application is respectfully requested.

A. SUMMARY OF THIS AMENDMENT

By the current amendment, Applicant basically:

1. Amend independent claims 1, 3, 5, and 6.
2. Respectfully traverses all prior art rejections.
3. Advises the Examiner of the simultaneous filing of a terminal disclaimer to moot the double patenting rejection.

B. THE PRIOR ART REJECTIONS

Claim 1-6 are rejected under 35 U.S.C. 103 as being unpatentable over US 20150223148 to Shi et al. in view of US 20180049024 to Schliwa-Bertling et al. and US 20160234759 to Kubota et al. All prior art rejections are respectfully traversed for at least the following reasons.

C. PATENTABILITY OF THE CLAIMS

By the current amendment Applicant makes more clear that, in all independent claims, upon a change of a second type SIB whose associated information indicated before the change that the second type SIB was provided on-demand, Applicant includes in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast.

Thus, as now even more clear in the amended independent claims, the method of delivery of the "associated second type system information blocks" is essentially switched from "on-demand" to "by broadcast" according to the change of the "associated second type system information blocks".

Applicant respectfully submits that the independent claims, particularly as now amended, patentably distinguish over the combined applied prior art references.

DAINGEAN_0001756

For example, ¶[0020] US 20180049024 to Schliwa-Bertling states as follows:

"UEs in a cell of the connected eNB will be triggered to receive broadcast system information in the cell. This can be achieved by transmitting paging messages in all cells of the connected eNB, indicating that all UEs (i.e. not only UEs addressed in the paging message) shall start to receive broadcast system information. [...]"

The foregoing is demonstrates that Schliwa-Berting thus fails to teach or suggest that a method of delivery of "associated second type system information blocks" is switched from "on-demand" to "by broadcast" according to the change of the "associated second type system information blocks". Applicant respectfully also submits that, e.g., the claim limitations herein discussed, are not taught or suggested by either US 20150223148 to Shi et al. or US 20160234759 to Kubota et al.

In view of the foregoing, the applied prior art references do not provide a basis for denying patentability of the independent claims and should be withdrawn.

D. THE DOUBLE PATENTING REJECTION IS MOOT

Applicant advises the Examiner of the filing of a terminal disclaimer over US Patent 10,462,823 that moots the double patenting rejection set forth on page 4 of the office action.

E. MISCELLANEOUS

In view of the foregoing and other considerations, all claims are deemed in condition for allowance. A formal indication of allowability is earnestly solicited.

Applicant does not acquiesce as to any assertion in the office action, including but not limited to any assertion with respect to the prior art or to Applicant's claims. Applicant's silence with respect to any assertion in the office action should not be

interpreted as Applicant's acquiescence thereto. Applicant reserves the right to comment further with respect to the applied references and any pending claim in a future Amendment, Response, or on appeal.

The Commissioner is authorized to charge the undersigned's deposit account #14-1140 in whatever amount is necessary for entry of these papers and the continued pendency of the captioned application.

Should the Examiner feel that an interview with the undersigned would facilitate allowance of this application, the Examiner is encouraged to contact the undersigned.

Respectfully submitted,
NIXON & VANDERHYE P.C.

By: /H. Warren Burnam, Jr./
H. Warren Burnam, Jr.
Reg. No. 29,366

HWB:lsh
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

DAINGEAN_0001758

Electronic Acknowledgement Receipt

EFS ID:	38808489
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	H. Warren Burnam
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	09-MAR-2020
Filing Date:	09-OCT-2019
Time Stamp:	15:46:11
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		161083-1US_1035-1394_amendment_2020_March_9.pdf	133505 ac13593ced643e78276a7a69b18977bc57762a9e	yes	8

	Multipart Description/PDF files in .zip description		
	Document Description	**Start**	**End**
	Amendment/Req. Reconsideration-After Non-Final Reject	1	1
	Claims	2	5
	Applicant Arguments/Remarks Made in an Amendment	6	8
Warnings:			
Information:			
	Total Files Size (in bytes):	133505	

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/06 (09-11)
Approved for use through 1/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875	Application or Docket Number 16/597,325	Filing Date 10/09/2019	☐ To be Mailed

ENTITY: ☑ LARGE ☐ SMALL ☐ MICRO

APPLICATION AS FILED - PART I

FOR	(Column 1) NUMBER FILED	(Column 2) NUMBER EXTRA		RATE ($)	FEE ($)
☐ BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A		N/A	
☐ SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A		N/A	
☐ EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A		N/A	
TOTAL CLAIMS (37 CFR 1.16(i))	minus 20 =	*		x $100 =	
INDEPENDENT CLAIMS (37 CFR 1.16(h))	minus 3 =	*		x $460 =	
☐ APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is $310 ($155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).				
☐ MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))					
* If the difference in column 1 is less than zero, enter "0" in column 2.				TOTAL	

APPLICATION AS AMENDED - PART II

		(Column 1)		(Column 2)	(Column 3)			
AMENDMENT	03/09/2020	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE ($)	ADDITIONAL FEE ($)
	Total (37 CFR 1.16(i))	* 6	Minus	** 20	= 0		x $100 =	0
	Independent (37 CFR 1.16(h))	* 4	Minus	*** 4	= 0		x $460 =	0
	☐ Application Size Fee (37 CFR 1.16(s))							
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							
							TOTAL ADD'L FEE	0

		(Column 1)		(Column 2)	(Column 3)			
AMENDMENT		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE ($)	ADDITIONAL FEE ($)
	Total (37 CFR 1.16(i))	*	Minus	**	=		x $0 =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=		x $0 =	
	☐ Application Size Fee (37 CFR 1.16(s))							
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							
							TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.	LIE
** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".	/ANTHONY TYSON/
*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".	
The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

NOTICE OF ALLOWANCE AND FEE(S) DUE

23117 7590 03/18/2020
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

EXAMINER	
HONG, DUNG	
ART UNIT	PAPER NUMBER
2643	

DATE MAILED: 03/18/2020

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

TITLE OF INVENTION: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	UNDISCOUNTED	$1000	$0.00	$0.00	$1000	06/18/2020

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

HOW TO REPLY TO THIS NOTICE:

I. Review the ENTITY STATUS shown above. If the ENTITY STATUS is shown as SMALL or MICRO, verify whether entitlement to that entity status still applies.

If the ENTITY STATUS is the same as shown above, pay the TOTAL FEE(S) DUE shown above.

If the ENTITY STATUS is changed from that shown above, on PART B - FEE(S) TRANSMITTAL, complete section number 5 titled "Change in Entity Status (from status indicated above)".

For purposes of this notice, small entity fees are 1/2 the amount of undiscounted fees, and micro entity fees are 1/2 the amount of small entity fees.

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Maintenance fees are due in utility patents issuing on applications filed on or after Dec. 12, 1980. It is patentee's responsibility to ensure timely payment of maintenance fees when due. More information is available at www.uspto.gov/PatentMaintenanceFees.

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), by mail or fax, or via EFS-Web.

By mail, send to: Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

By fax, send to: (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

23117 7590 03/18/2020
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being transmitted to the USPTO via EFS-Web or by facsimile to (571) 273-2885, on the date below.

(Typed or printed name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

TITLE OF INVENTION: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	UNDISCOUNTED	$1000	$0.00	$0.00	$1000	06/18/2020

EXAMINER	ART UNIT	CLASS-SUBCLASS
HONG, DUNG	2643	370-329000

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

❑ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.

❑ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-09 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list
(1) The names of up to 3 registered patent attorneys or agents OR, alternatively,
(2) The name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

1 _____
2 _____
3 _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document must have been previously recorded, or filed for recordation, as set forth in 37 CFR 3.11 and 37 CFR 3.81(a). Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE (B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent) : ❑ Individual ❑ Corporation or other private group entity ❑ Government

4a. Fees submitted: ❑ Issue Fee ❑ Publication Fee (if required) ❑ Advance Order - # of Copies _____

4b. Method of Payment: *(Please first reapply any previously paid fee shown above)*

❑ Electronic Payment via EFS-Web ❑ Enclosed check ❑ Non-electronic payment by credit card (Attach form PTO-2038)

❑ The Director is hereby authorized to charge the required fee(s), any deficiency, or credit any overpayment to Deposit Account No. _____

5. **Change in Entity Status** (from status indicated above)

❑ Applicant certifying micro entity status. See 37 CFR 1.29

❑ Applicant asserting small entity status. See 37 CFR 1.27

❑ Applicant changing to regular undiscounted fee status.

NOTE: Absent a valid certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.
NOTE: If the application was previously under micro entity status, checking this box will be taken to be a notification of loss of entitlement to micro entity status.
NOTE: Checking this box will be taken to be a notification of loss of entitlement to small or micro entity status, as applicable.

NOTE: This form must be signed in accordance with 37 CFR 1.31 and 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Authorized Signature _____ Date _____

Typed or printed name _____ Registration No. _____

DAINGEAN_0001763

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

23117 7590 03/18/2020

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

EXAMINER	
HONG, DUNG	

ART UNIT	PAPER NUMBER
2643	

DATE MAILED: 03/18/2020

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)
(Applications filed on or after May 29, 2000)

The Office has discontinued providing a Patent Term Adjustment (PTA) calculation with the Notice of Allowance.

Section 1(h)(2) of the AIA Technical Corrections Act amended 35 U.S.C. 154(b)(3)(B)(i) to eliminate the requirement that the Office provide a patent term adjustment determination with the notice of allowance. See Revisions to Patent Term Adjustment, 78 Fed. Reg. 19416, 19417 (Apr. 1, 2013). Therefore, the Office is no longer providing an initial patent term adjustment determination with the notice of allowance. The Office will continue to provide a patent term adjustment determination with the Issue Notification Letter that is mailed to applicant approximately three weeks prior to the issue date of the patent, and will include the patent term adjustment on the patent. Any request for reconsideration of the patent term adjustment determination (or reinstatement of patent term adjustment) should follow the process outlined in 37 CFR 1.705.

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

DAINGEAN_0001764

OMB Clearance and PRA Burden Statement for PTOL-85 Part B

The Paperwork Reduction Act (PRA) of 1995 requires Federal agencies to obtain Office of Management and Budget approval before requesting most types of information from the public. When OMB approves an agency request to collect information from the public, OMB (i) provides a valid OMB Control Number and expiration date for the agency to display on the instrument that will be used to collect the information and (ii) requires the agency to inform the public about the OMB Control Number's legal significance in accordance with 5 CFR 1320.5(b).

The information collected by PTOL-85 Part B is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450. Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Notice of Allowability	Application No. 16/597,325	Applicant(s) ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	AIA (FITF) Status Yes

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☑ This communication is responsive to 03/09/2020.
   ☐ A declaration(s)/affidavit(s) under **37 CFR 1.130(b)** was/were filed on _____.

2. ☐ An election was made by the applicant in response to a restriction requirement set forth during the interview on _____; the restriction requirement and election have been incorporated into this action.

3. ☑ The allowed claim(s) is/are 1-6 . As a result of the allowed claim(s), you may be eligible to benefit from the **Patent Prosecution Highway** program at a participating intellectual property office for the corresponding application. For more information, please see **http://www.uspto.gov/patents/init_events/pph/index.jsp** or send an inquiry to **PPHfeedback@uspto.gov.**

4. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

   Certified copies:

   a) ☐ All b) ☐ Some *c) ☐ None of the:

   1. ☐ Certified copies of the priority documents have been received.
   2. ☐ Certified copies of the priority documents have been received in Application No. _____ .
   3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

   * Certified copies not received: _____ .

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.
THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

5. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
   ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date _____ .

   Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).

6. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

1. ☑ Notice of References Cited (PTO-892)
2. ☐ Information Disclosure Statements (PTO/SB/08), Paper No./Mail Date _____.
3. ☐ Examiner's Comment Regarding Requirement for Deposit of Biological Material _____.
4. ☐ Interview Summary (PTO-413), Paper No./Mail Date. _____.
5. ☐ Examiner's Amendment/Comment
6. ☑ Examiner's Statement of Reasons for Allowance
7. ☐ Other _____.

/DUNG HONG/
Primary Examiner, Art Unit 2643

REASONS FOR ALLOWANCE

The following is an Examiner's statement of reasons for allowance:

Applicant amendment and terminal disclaimer filed on 03/09/2020 have overcome the rejection issued by Examiner on 12/10/2019. Claim 1, 3, 5, 6 and their dependent claims are allowable over prior art of record.

All related reference found by Examiner are listed in "Notice of Reference Cited".

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance."

Contact Information

Any inquiry concerning this communication or earlier communications from the examiner should be directed to DUNG HONG whose telephone number is (571) 270-7928. The examiner can normally be reached on Monday-Friday from 8:00 am to 5:00 pm.

Examiner interviews are available via telephone, in-person, and video conferencing using a USPTO supplied web-based collaboration tool. To schedule

an interview, Applicant is encouraged to use the USPTO Automated Interview Request (AIR) at http://www.uspto.gov/interviewpractice.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, JINSONG HU, can be reached on (571) 272-3965. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

/DUNG HONG/
Primary Examiner, Art Unit 2643

Notice of References Cited	Application/Control No. 16/597,325	Applicant(s)/Patent Under Reexamination ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	Page 1 of 2

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-20180110036-A1	04-2018	Tabet; Tarik	H04W72/042	1/1
*	B	US-8837404-B2	09-2014	Cha; Jae Sun	H04W48/10	370/329
*	C	US-8379567-B2	02-2013	Cho; Hee Jeong	H04W48/12	370/326
*	D	US-20180132165-A1	05-2018	Takahashi; Hideaki	H04W48/10	1/1
*	E	US-20090221293-A1	09-2009	Petrovic; Dragan	H04W72/005	455/450
*	F	US-20150223148-A1	08-2015	SHI; Yongsheng	H04W48/10	370/312
*	G	US-20160234759-A1	08-2016	Kubota; Keiichi	H04W48/12	1/1
*	H	US-20160150506-A1	05-2016	Tabet; Tarik	H04W48/20	370/329
*	I	US-20160143017-A1	05-2016	YANG; Suckchel	H04W72/0406	370/329
*	J	US-20150334766-A1	11-2015	LEE; Eunjong	H04W48/12	455/426.1
*	K	US-20100227611-A1	09-2010	Schmidt; Andreas	H04W4/06	455/434
*	L	US-20110002250-A1	01-2011	Wang; Peter S.	H04W76/40	370/311
*	M	US-20190029001-A1	01-2019	WANG; Yuanyuan	H04W72/005	1/1

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Notice of References Cited	Application/Control No. 16/597,325	Applicant(s)/Patent Under Reexamination ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	Page 2 of 2

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-20180049024-A1	02-2018	Schliwa-Bertling; Paul	H04W8/30	1/1
*	B	US-20170251500-A1	08-2017	AGIWAL; Anil	H04W48/12	1/1
*	C	US-20170311290-A1	10-2017	Adjakple; Pascal M.	H04W4/06	1/1
	D					
	E					
	F					
	G					
	H					
	I					
	J					
	K					
	L					
	M					

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Index of Claims	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

✓	Rejected	-	Cancelled	N	Non-Elected	A	Appeal
=	Allowed	÷	Restricted	I	Interference	O	Objected

CLAIMS

☐ Claims renumbered in the same order as presented by applicant ☐ CPA ☑ T.D. ☐ R.1.47

CLAIM		DATE								
Final	Original	12/05/2019	03/12/2020							
1	1	✓	=							
2	2	✓	=							
3	3	✓	=							
4	4	✓	=							
5	5	✓	=							
6	6	✓	=							

Search Notes	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

CPC - Searched*		
Symbol	**Date**	**Examiner**
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

CPC Combination Sets - Searched*		
Symbol	**Date**	**Examiner**
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

US Classification - Searched*			
Class	**Subclass**	**Date**	**Examiner**

* See search history printout included with this form or the SEARCH NOTES box below to determine the scope of the search.

Search Notes		
Search Notes	**Date**	**Examiner**
Inventor search, Google search, CPC search, Text search	12/04/2019	DH
Inventor search, Google search, CPC search, Text search	03/12/2020	DH

Interference Search			
US Class/CPC Symbol	**US Subclass/CPC Group**	**Date**	**Examiner**
	Text search within claim	03/12/2020	DH

/DUNG HONG/ Primary Examiner, Art Unit 2643	

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

CPC						
Symbol					**Type**	**Version**
H04W	/	74	/	0833	F	2013-01-01
H04W	/	48	/	10	I	2013-01-01
H04W	/	48	/	12	I	2013-01-01
H04W	/	72	/	0446	I	2013-01-01
H04W	/	88	/	02	A	2013-01-01

CPC Combination Sets							
Symbol					**Type**	**Set**	**Ranking**	**Version**
	/		/					

NONE		Total Claims Allowed:	
(Assistant Examiner)	(Date)	6	
/DUNG HONG/ Primary Examiner, Art Unit 2643	12 March 2020	O.G. Print Claim(s)	O.G. Print Figure
(Primary Examiner)	(Date)	1	6

U.S. Patent and Trademark Office — Part of Paper No.: 20200312

DAINGEAN_0001773

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

INTERNATIONAL CLASSIFICATION				
CLAIMED				
H04W74/08	/	74	/	08
H04W48/10	/	48	/	10
H04W48/12	/	48	/	12
H04W72/04	/	72	/	04
H04W88/02	/	88	/	02

NON-CLAIMED				
	/		/	

US ORIGINAL CLASSIFICATION	
CLASS	**SUBCLASS**

CROSS REFERENCES(S)						
CLASS	**SUBCLASS (ONE SUBCLASS PER BLOCK)**					

NONE		**Total Claims Allowed:**	
(Assistant Examiner)	(Date)	6	
/DUNG HONG/ Primary Examiner, Art Unit 2643	12 March 2020	O.G. Print Claim(s)	O.G. Print Figure
(Primary Examiner)	(Date)	1	6

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

☐ Claims renumbered in the same order as presented by applicant ☐ CPA ☑ T.D. ☐ R.1.47

CLAIMS

Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original
1	1														
2	2														
3	3														
4	4														
5	5														
6	6														

NONE (Assistant Examiner)	(Date)	**Total Claims Allowed:** 6	
/DUNG HONG/ Primary Examiner, Art Unit 2643 (Primary Examiner)	12 March 2020 (Date)	O.G. Print Claim(s) 1	O.G. Print Figure 6

U.S. Patent and Trademark Office

Part of Paper No.: 20200312

DAINGEAN_0001775

Bibliographic Data

Application No: 16/597,325

Foreign Priority claimed: ○ Yes ◉ No

35 USC 119 (a-d) conditions met: ☐ Yes ☑ No ☐ Met After Allowance

Verified and Acknowledged: /DUNG HONG/ (Examiner's Signature) | (Initials)

Title: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

FILING or 371(c) DATE	CLASS	GROUP ART UNIT	ATTORNEY DOCKET NO.
10/09/2019	370	2643	161083_1US_1035-1394
RULE			

APPLICANTS

SHARP KABUSHIKI KAISHA, Sakai City, JAPAN

INVENTORS

Atsushi ISHII Vancouver, WA, UNITED STATES

CONTINUING DATA

This application is a CON of 15659060 07/25/2017 PAT 10462823

15659060 has PRO of 62368126 07/28/2016

FOREIGN APPLICATIONS

IF REQUIRED, FOREIGN LICENSE GRANTED**

10/24/2019

STATE OR COUNTRY

UNITED STATES

ADDRESS

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

FILING FEE RECEIVED

$2,180

EAST Search History

EAST Search History (Prior Art)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L6	240	trigger near2 receiv$6 with (SIB or MIB or system near2 information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:52
L7	98	trigger$4 near2 receiv$6 near3 (SIB or MIB or system near2 information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:55
L8	18	trigger$4 near2 receiv$6 near3 (SIB or MIB or system near2 information) with (UE or terminal or equipment or "MS" or phone or smart$1phone) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:56
L9	61	"8837404" or "8379567" or "20180132165" or "20090221293" or 2015/0223148 or "20160234759" or "20160150506" or "20160143017" or "20150334766" or "20100227611" or "20150223148" or "20160150506" or "20090262693" or "8538444" or "20180035468"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:42
L10	46	9 AND ((H04W48/12 OR H04W48/10 OR H04W72/042 OR H04W72/005 OR H04W74/0833).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:44
L11	7	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:55
L12	166520	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
L13	263	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
L14	166745	L12 or L13	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
L15	1	L11 and L14	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57

S1	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S2	161282	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S3	230	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S4	161478	S2 or S3	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S5	13	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:20
S8	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:26
S9	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:29
S10	120	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:56
S11	87	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:56
S13	25	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 17:02
S14	18	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 17:02
S15	22	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 08:26

S16	18	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 08:28
S17	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 10:54
S20	13	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:33
S21	2	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:34
S22	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:35
S23	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:35
S24	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11
S25	31	S24 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11
S26	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11
S27	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:13
S28	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 18:15
S29	169	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:53
S30	159	request$4 with (SIB or system	US-	ADJ	ON	2018/09/20

		information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	PGPUB; USPAT; DERWENT			08:54
S31	200	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:54
S32	30	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:55
S33	13	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:42
S34	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:43
S35	27	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:45
S36	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 10:01
S37	44	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:39
S38	39	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:40
S39	73	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:55
S40	989	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:58

		(@ad<"20160628" or @rlad<"20160628")				
S41	4	S39 and S40	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:59
S42	34	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 14:12
S43	12	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 14:31
S46	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:19
S47	6	S46 and system near3 information	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:21
S48	1	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:24
S49	1	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:26
S50	2	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4 or enhanc$6) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:27
S51	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S52	164403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S53	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S54	164611	S52 or S53	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S55	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S56	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or	US-PGPUB;	ADJ	ON	2019/06/08 16:30

		information) with schedul$8 near3 broadcast$4).clm. and S54	USPAT; DERWENT			
S57	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S58	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S59	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S60	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S61	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S62	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S63	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S64	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S65	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S66	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30

S67	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S68	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S69	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S70	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S71	35	S70 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S72	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S73	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S74	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S75	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S76	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S77	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S78	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S79	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30

S80	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S81	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S82	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S83	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S84	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S85	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S86	1015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S87	4	S85 and S86	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S88	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S89	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S92	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ |	US-PGPUB; USPAT;	ADJ	ON	2019/06/10 13:12

		US-20170311341-$ | US-20180206139-$).DID.	DERWENT			
S93	164403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S94	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S95	164611	S93 or S94	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S96	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4).clm. and S95	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S97	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID. and (@ad<"201606028" or @rlad<"201606028")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:42
S98	0	S97 and (on$1demand or broadcast$4) with (complet$6 or extend$6 or full or extra or second) near3 (system near2 information or SIB)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:49
S99	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:04
S100	8	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" and @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:04
S101	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S102	164403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S103	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S104	164611	S93 or S94	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S105	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S106	3	"20160150506"	US-PGPUB;	ADJ	ON	2019/06/10 14:10

			USPAT; DERWENT			
S107	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S108	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S109	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S110	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S111	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S112	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S113	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S114	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S115	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S116	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S117	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S118	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S119	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S120	35	S119 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S121	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S122	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S123	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S124	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S125	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S126	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S127	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S128	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S129	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S130	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S131	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S132	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S133	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S134	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S135	1015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S136	4	S134 and S135	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S137	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S138	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S139	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S140	6	S139 and system near3 information	US-PGPUB; USPAT;	ADJ	ON	2019/06/10 14:10

			DERWENT			
S141	1	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S142	1	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S143	2	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4 or enhanc$6) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S144	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S145	164403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S146	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S147	164611	S145 or S146	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S148	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S149	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4).clm. and S147	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S150	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S151	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S152	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S153	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S154	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

		or specific or extra) and (version or ver) with (SI OR SIB or system information)				
S155	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S156	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S157	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S158	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S159	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S160	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S161	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S162	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S163	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S164	35	S163 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S165	81	schedul$4 with (broadcast$4 or	US-	ADJ	ON	2019/06/10

		multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	PGPUB; USPAT; DERWENT			14:10
S166	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S167	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S168	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S169	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S170	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S171	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S172	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S173	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S174	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S175	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S176	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S177	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag	US-PGPUB;	ADJ	ON	2019/06/10 14:10

		or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	USPAT; DERWENT			
S178	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S179	1015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S180	4	S178 and S179	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S181	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S182	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S183	7	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID. and (@ad<"201606028" or @rlad<"201606028")	US-PGPUB; USPAT	ADJ	ON	2019/06/10 14:44
S190	2	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 13:52
S191	258	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S192	87	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S193	39	S192 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S194	39	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628"	US-PGPUB; USPAT;	ADJ	ON	2019/12/04 18:42

		or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	DERWENT			
S195	36501	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:52
S196	37121	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:52
S197	17	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:54
S198	7	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with request$5 and (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:57
S199	4	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with request$5 and (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:57
S200	3	"20180110036"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:23
S202	14	WO (2015/143244 or 2008/044664)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:30
S203	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:30
S204	61	"8837404" or "8379567" or "20180132165" or "20090221293" or 2015/0223148 or "20160234759" or "20160150506" or "20160143017" or "20150334766" or "20100227611" or "20150223148" or "20160150506" or "20090262693" or "8538444" or "20180035468"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 09:27
S205	32	S204 and (system information and SIB)	US-PGPUB; USPAT;	ADJ	ON	2019/12/05 09:27

			DERWENT			
S206	13	S204 and (system information and SIB) near3 (second$5 or supplement$4 or extra or full or complete or extend$4 or on$1demand)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 09:46

EAST Search History (Interference)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
S44	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/02/11 13:39
S45	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/02/11 14:39
S90	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/08 16:30
S91	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/08 16:30
S184	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S185	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S186	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S187	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S188	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:51
S189	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:51

12/ 5/ 2019 2:57:51 PM
C:\ Users\ dhong\ Documents\ EAST\ Workspaces\ 597325-16.wsp

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Mar 18, 2020 04:04:42 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	NOA	03/18/2020	161083_1US_1035-1394
	892	03/18/2020	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

REQUEST FOR CONTINUED EXAMINATION (RCE) TRANSMITTAL

Address to:
Mail Stop RCE
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Application Number	16/597,325		
Filing Date	10/09/2019		
First Named Inventor	ISHII, Atsushi		
Group Art Unit	2643	*Conf. No.*	6587
Examiner Name	HONG, DUNG		
Attorney Docket Number	161083_1US_1035-1394		

This is a Request for Continued Examination (RCE) under 37 C.F.R. §1.114 of the above-identified application.
Request for continued Examination (RCE) practice under 37 C.F.R. § 1.114 does not apply to any utility or plant application filed prior to June 8, 1995, or to any design application. See Instruction Sheet for RCEs (not to be submitted to the USPTO).

1. Submission required under 37 C.F.R. § 1.114.
   - a. ☐ Previously submitted (Note: Any previously filed unentered amendments will be entered unless applicant instructs otherwise. If applicant does not wish to have previously filed unentered amendment(s) entered, applicant must request non-entry of such amendment(s).
     - i. ☐ Consider the amendment(s)/reply under 37 C.F.R. § 1.116 previously filed on _____
     - ii. ☐ Consider the arguments in the Appeal Brief or Reply Brief previously filed on _____
     - iii. ☐ Other _____
   - b. ☒ Enclosed
     - i. ☐ Amendment/Reply
     - ii. ☐ Affidavit(s)/Declaration(s)
     - iii. ☒ Information Disclosure Statement (IDS)
     - iv. ☐ Other _____
2. Miscellaneous
   - a. ☐ Suspension of action on the above-identified application is requested under 37 C.F.R. § 1.103(c) for a period of _____ months. (Period of suspension shall not exceed 3 months; Fee under 37 C.F.R. § 1.17(i) **required**)
   - b. ☐ Other _____
3. Fees The RCE fee under 37 C.F.R. § 1.17(e) is required by 37 C.F.R. § 1.114 when the RCE is filed.
   - a. ☐ Applicant claims "small entity" status.
     ☐ Applicant claims "micro entity" status. ☐ Micro entity certification statement filed herewith.
   - b. ☒ Fees are attached as calculated below:
     - i. ☒ RCE fee required under 37 C.F.R. § 1.17(e)(1) $1300.00 (1801)/$650.00 (2801)/$325.00 (3801) $ 1300.00
       ☐ RCE fee required under 37 C.F.R. § 1.17(e)(2) $1900.00 (1820)/$950.00 (2820)/$475.00 (3820) $
     - ii. ☐ Petition is made to extend the due date months (less months previously paid) $
     - iii. ☐ Other _____ $
   - c. ☒ **CREDIT CARD OR DEPOSIT ACCOUNT PAYMENT (CREDIT CARD FORM ATTACHED IF PAPER FILING) in the amount of $1300.00**
   - d. ☒ The Director is hereby authorized to charge any deficiency in the fee(s) filed or which should have been filed herewith (or with any paper hereafter filed in this application by this firm), to Deposit Account No. 14-1140.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

Name (Print Type)	H. Warren Burnam, Jr.	*Registration No. (Attorney/Agent)*	29,366
Signature	/H. Warren Burnam, Jr./	*Date*	June 10, 2020

CERTIFICATE OF MAILING OR TRANSMISSION

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Mail Stop RCE, Commissioner For Patents, P.O. Box 1450, Alexandria, VA 22313-1450, or facsimile transmitted to the U.S. Patent and Trademark Office on:

Name (Print Type)			
Signature		*Date*	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Mail Stop RCE, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

3GPP TS 36.331 V13.2.0 (2016-06)

Technical Specification

3rd Generation Partnership Project;
Technical Specification Group Radio Access Network;
Evolved Universal Terrestrial Radio Access (E-UTRA);
Radio Resource Control (RRC);
Protocol specification
(Release 13)





The present document has been developed within the 3rd Generation Partnership Project (3GPP TM) and may be further elaborated for the purposes of 3GPP.
The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented.
This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification.
Specifications and reports for implementation of the 3GPP TM system should be obtained via the 3GPP Organizational Partners' Publications Offices.

DAINGEAN_0001798

Keywords
UMTS, radio

3GPP

Postal address

3GPP support office address
650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet
http://www.3gpp.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2016, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners
LTE™ is a Trade Mark of ETSI currently being registered for the benefit of its Members and of the 3GPP Organizational Partners
GSM® and the GSM logo are registered and owned by the GSM Association
Bluetooth® is a Trade Mark of the Bluetooth SIG registered for the benefit of its members

DAINGEAN_0001799

Contents

Foreword 18
1 Scope 19
2 References 19
3 Definitions, symbols and abbreviations 22
3.1 Definitions 22
3.2 Abbreviations 24
4 General 27
4.1 Introduction 27
4.2 Architecture 28
4.2.1 UE states and state transitions including inter RAT 28
4.2.2 Signalling radio bearers 29
4.3 Services 30
4.3.1 Services provided to upper layers 30
4.3.2 Services expected from lower layers 30
4.4 Functions 30
5 Procedures 32
5.1 General 32
5.1.1 Introduction 32
5.1.2 General requirements 32
5.2 System information 33
5.2.1 Introduction 33
5.2.1.1 General 33
5.2.1.2 Scheduling 34
5.2.1.2a Scheduling for NB-IoT 34
5.2.1.3 System information validity and notification of changes 35
5.2.1.4 Indication of ETWS notification 36
5.2.1.5 Indication of CMAS notification 37
5.2.1.6 Notification of EAB parameters change 37
5.2.1.7 Access Barring parameters change in NB-IoT 37
5.2.2 System information acquisition 38
5.2.2.1 General 38
5.2.2.2 Initiation 38
5.2.2.3 System information required by the UE 38
5.2.2.4 System information acquisition by the UE 39
5.2.2.5 Essential system information missing 42
5.2.2.6 Actions upon reception of the *MasterInformationBlock* message 42
5.2.2.7 Actions upon reception of the *SystemInformationBlockType1* message 42
5.2.2.8 Actions upon reception of *SystemInformation* messages 44
5.2.2.9 Actions upon reception of *SystemInformationBlockType2* 44
5.2.2.10 Actions upon reception of *SystemInformationBlockType3* 45
5.2.2.11 Actions upon reception of *SystemInformationBlockType4* 45
5.2.2.12 Actions upon reception of *SystemInformationBlockType5* 45
5.2.2.13 Actions upon reception of *SystemInformationBlockType6* 45
5.2.2.14 Actions upon reception of *SystemInformationBlockType7* 45
5.2.2.15 Actions upon reception of *SystemInformationBlockType8* 45
5.2.2.16 Actions upon reception of *SystemInformationBlockType9* 46
5.2.2.17 Actions upon reception of *SystemInformationBlockType10* 46
5.2.2.18 Actions upon reception of *SystemInformationBlockType11* 46
5.2.2.19 Actions upon reception of *SystemInformationBlockType12* 47
5.2.2.20 Actions upon reception of *SystemInformationBlockType13* 48
5.2.2.21 Actions upon reception of *SystemInformationBlockType14* 48
5.2.2.22 Actions upon reception of *SystemInformationBlockType15* 48
5.2.2.23 Actions upon reception of *SystemInformationBlockType16* 48
5.2.2.24 Actions upon reception of *SystemInformationBlockType17* 48
5.2.2.25 Actions upon reception of *SystemInformationBlockType18* 48

DAINGEAN_0001800

5.2.2.26 Actions upon reception of *SystemInformationBlockType19* 49
5.2.3 Acquisition of an SI message 49
5.2.3a Acquisition of an SI message by BL UE or UE in CE or a NB-IoT UE 50
5.3 Connection control 50
5.3.1 Introduction 50
5.3.1.1 RRC connection control 50
5.3.1.2 Security 52
5.3.1.2a RN security 53
5.3.1.3 Connected mode mobility 53
5.3.1.4 Connection control in NB-IoT 54
5.3.2 Paging 55
5.3.2.1 General 55
5.3.2.2 Initiation 55
5.3.2.3 Reception of the *Paging* message by the UE 55
5.3.3 RRC connection establishment 56
5.3.3.1 General 56
5.3.3.1a Conditions for establishing RRC Connection for sidelink communication/ discovery 58
5.3.3.2 Initiation 59
5.3.3.3 Actions related to transmission of *RRCConnectionRequest* message 63
5.3.3.3a Actions related to transmission of *RRCConnectionResumeRequest* message 64
5.3.3.4 Reception of the *RRCConnectionSetup* by the UE 64
5.3.3.4a Reception of the *RRCConnectionResume* by the UE 66
5.3.3.5 Cell re-selection while T300, T302, T303, T305, T306, or T308 is running 68
5.3.3.6 T300 expiry 68
5.3.3.7 T302, T303, T305, T306, or T308 expiry or stop 69
5.3.3.8 Reception of the *RRCConnectionReject* by the UE 70
5.3.3.9 Abortion of RRC connection establishment 71
5.3.3.10 Handling of SSAC related parameters 71
5.3.3.11 Access barring check 72
5.3.3.12 EAB check 73
5.3.3.13 Access barring check for ACDC 73
5.3.3.14 Access Barring check for NB-IoT 74
5.3.4 Initial security activation 75
5.3.4.1 General 75
5.3.4.2 Initiation 76
5.3.4.3 Reception of the *SecurityModeCommand* by the UE 76
5.3.5 RRC connection reconfiguration 77
5.3.5.1 General 77
5.3.5.2 Initiation 77
5.3.5.3 Reception of an *RRCConnectionReconfiguration* not including the *mobilityControlInfo* by the UE 77
5.3.5.4 Reception of an *RRCConnectionReconfiguration* including the *mobilityControlInfo* by the UE (handover) 79
5.3.5.5 Reconfiguration failure 83
5.3.5.6 T304 expiry (handover failure) 83
5.3.5.7 Void 84
5.3.5.7a T307 expiry (SCG change failure) 84
5.3.5.8 Radio Configuration involving full configuration option 84
5.3.6 Counter check 86
5.3.6.1 General 86
5.3.6.2 Initiation 86
5.3.6.3 Reception of the *CounterCheck* message by the UE 86
5.3.7 RRC connection re-establishment 87
5.3.7.1 General 87
5.3.7.2 Initiation 87
5.3.7.3 Actions following cell selection while T311 is running 88
5.3.7.4 Actions related to transmission of *RRCConnectionReestablishmentRequest* message 89
5.3.7.5 Reception of the *RRCConnectionReestablishment* by the UE 89
5.3.7.6 T311 expiry 91
5.3.7.7 T301 expiry or selected cell no longer suitable 91
5.3.7.8 Reception of *RRCConnectionReestablishmentReject* by the UE 91
5.3.8 RRC connection release 92

DAINGEAN_0001801

5.3.8.1 General ... 92
5.3.8.2 Initiation ... 92
5.3.8.3 Reception of the *RRCConnectionRelease* by the UE ... 92
5.3.8.4 T320 expiry ... 93
5.3.9 RRC connection release requested by upper layers ... 93
5.3.9.1 General ... 93
5.3.9.2 Initiation ... 93
5.3.10 Radio resource configuration ... 93
5.3.10.0 General ... 93
5.3.10.1 SRB addition/ modification ... 94
5.3.10.2 DRB release ... 95
5.3.10.3 DRB addition/ modification ... 95
5.3.10.3a1 DC specific DRB addition or reconfiguration ... 96
5.3.10.3a2 LWA specific DRB addition or reconfiguration ... 98
5.3.10.3a3 LWIP specific DRB addition or reconfiguration ... 98
5.3.10.3a SCell release ... 99
5.3.10.3b SCell addition/ modification ... 99
5.3.10.3c PSCell addition or modification ... 99
5.3.10.4 MAC main reconfiguration ... 99
5.3.10.5 Semi-persistent scheduling reconfiguration ... 100
5.3.10.6 Physical channel reconfiguration ... 100
5.3.10.7 Radio Link Failure Timers and Constants reconfiguration ... 101
5.3.10.8 Time domain measurement resource restriction for serving cell ... 101
5.3.10.9 Other configuration ... 102
5.3.10.10 SCG reconfiguration ... 103
5.3.10.11 SCG dedicated resource configuration ... 104
5.3.10.12 Reconfiguration SCG or split DRB by *drb-ToAddModList* ... 105
5.3.10.13 Neighbour cell information reconfiguration ... 105
5.3.10.14 Void ... 105
5.3.10.15 Sidelink dedicated configuration ... 105
5.3.10.16 T370 expiry ... 106
5.3.11 Radio link failure related actions ... 107
5.3.11.1 Detection of physical layer problems in RRC_CONNECTED ... 107
5.3.11.2 Recovery of physical layer problems ... 107
5.3.11.3 Detection of radio link failure ... 107
5.3.12 UE actions upon leaving RRC_CONNECTED ... 109
5.3.13 UE actions upon PUCCH/ SRS release request ... 110
5.3.14 Proximity indication ... 110
5.3.14.1 General ... 110
5.3.14.2 Initiation ... 111
5.3.14.3 Actions related to transmission of *ProximityIndication* message ... 111
5.3.15 Void ... 111
5.4 Inter-RAT mobility ... 111
5.4.1 Introduction ... 111
5.4.2 Handover to E-UTRA ... 112
5.4.2.1 General ... 112
5.4.2.2 Initiation ... 112
5.4.2.3 Reception of the *RRCConnectionReconfiguration* by the UE ... 112
5.4.2.4 Reconfiguration failure ... 114
5.4.2.5 T304 expiry (handover to E-UTRA failure) ... 114
5.4.3 Mobility from E-UTRA ... 114
5.4.3.1 General ... 114
5.4.3.2 Initiation ... 115
5.4.3.3 Reception of the *MobilityFromEUTRACommand* by the UE ... 115
5.4.3.4 Successful completion of the mobility from E-UTRA ... 116
5.4.3.5 Mobility from E-UTRA failure ... 117
5.4.4 Handover from E-UTRA preparation request (CDMA2000) ... 117
5.4.4.1 General ... 117
5.4.4.2 Initiation ... 118
5.4.4.3 Reception of the *HandoverFromEUTRAPreparationRequest* by the UE ... 118
5.4.5 UL handover preparation transfer (CDMA2000) ... 118
5.4.5.1 General ... 118

DAINGEAN_0001802

5.4.5.2 Initiation 118
5.4.5.3 Actions related to transmission of the *ULHandoverPreparationTransfer* message 119
5.4.5.4 Failure to deliver the *ULHandoverPreparationTransfer* message 119
5.4.6 Inter-RAT cell change order to E-UTRAN 119
5.4.6.1 General 119
5.4.6.2 Initiation 119
5.4.6.3 UE fails to complete an inter-RAT cell change order 119
5.5 Measurements 120
5.5.1 Introduction 120
5.5.2 Measurement configuration 121
5.5.2.1 General 121
5.5.2.2 Measurement identity removal 122
5.5.2.2a Measurement identity autonomous removal 122
5.5.2.3 Measurement identity addition/ modification 123
5.5.2.4 Measurement object removal 124
5.5.2.5 Measurement object addition/ modification 124
5.5.2.6 Reporting configuration removal 126
5.5.2.7 Reporting configuration addition/ modification 127
5.5.2.8 Quantity configuration 127
5.5.2.9 Measurement gap configuration 127
5.5.2.10 Discovery signals measurement timing configuration 128
5.5.2.11 RSSI measurement timing configuration 128
5.5.3 Performing measurements 128
5.5.3.1 General 128
5.5.3.2 Layer 3 filtering 131
5.5.4 Measurement report triggering 131
5.5.4.1 General 131
5.5.4.2 Event A1 (Serving becomes better than threshold) 135
5.5.4.3 Event A2 (Serving becomes worse than threshold) 136
5.5.4.4 Event A3 (Neighbour becomes offset better than PCell/ PSCell) 136
5.5.4.5 Event A4 (Neighbour becomes better than threshold) 137
5.5.4.6 Event A5 (PCell/ PSCell becomes worse than threshold1 and neighbour becomes better than threshold2) 138
5.5.4.6a Event A6 (Neighbour becomes offset better than SCell) 139
5.5.4.7 Event B1 (Inter RAT neighbour becomes better than threshold) 139
5.5.4.8 Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) 140
5.5.4.9 Event C1 (CSI-RS resource becomes better than threshold) 141
5.5.4.10 Event C2 (CSI-RS resource becomes offset better than reference CSI-RS resource) 141
5.5.4.11 Event W1 (WLAN becomes better than a threshold) 142
5.5.4.12 Event W2 (All WLAN inside WLAN mobility set becomes worse than threshold1 and a WLAN outside WLAN mobility set becomes better than threshold2) 142
5.5.4.13 Event W3 (All WLAN inside WLAN mobility set becomes worse than a threshold) 143
5.5.5 Measurement reporting 144
5.5.6 Measurement related actions 148
5.5.6.1 Actions upon handover and re-establishment 148
5.5.6.2 Speed dependant scaling of measurement related parameters 149
5.5.7 Inter-frequency RSTD measurement indication 149
5.5.7.1 General 149
5.5.7.2 Initiation 150
5.5.7.3 Actions related to transmission of *InterFreqRSTDMeasurementIndication* message 150
5.6 Other 150
5.6.0 General 150
5.6.1 DL information transfer 151
5.6.1.1 General 151
5.6.1.2 Initiation 151
5.6.1.3 Reception of the *DLInformationTransfer* by the UE 151
5.6.2 UL information transfer 151
5.6.2.1 General 151
5.6.2.2 Initiation 151
5.6.2.3 Actions related to transmission of *ULInformationTransfer* message 152
5.6.2.4 Failure to deliver *ULInformationTransfer* message 152

DAINGEAN_0001803

5.6.3 UE capability transfer 152
5.6.3.1 General 152
5.6.3.2 Initiation 153
5.6.3.3 Reception of the *UECapabilityEnquiry* by the UE 153
5.6.4 CSFB to 1x Parameter transfer 157
5.6.4.1 General 157
5.6.4.2 Initiation 157
5.6.4.3 Actions related to transmission of *CSFBParametersRequestCDMA2000* message 157
5.6.4.4 Reception of the *CSFBParametersResponseCDMA2000* message 157
5.6.5 UE Information 158
5.6.5.1 General 158
5.6.5.2 Initiation 158
5.6.5.3 Reception of the *UEInformationRequest* message 158
5.6.6 Logged Measurement Configuration 159
5.6.6.1 General 159
5.6.6.2 Initiation 160
5.6.6.3 Reception of the *LoggedMeasurementConfiguration* by the UE 160
5.6.6.4 T330 expiry 160
5.6.7 Release of Logged Measurement Configuration 160
5.6.7.1 General 160
5.6.7.2 Initiation 160
5.6.8 Measurements logging 161
5.6.8.1 General 161
5.6.8.2 Initiation 161
5.6.9 In-device coexistence indication 163
5.6.9.1 General 163
5.6.9.2 Initiation 164
5.6.9.3 Actions related to transmission of *InDeviceCoexIndication* message 164
5.6.10 UE Assistance Information 165
5.6.10.1 General 165
5.6.10.2 Initiation 166
5.6.10.3 Actions related to transmission of *UEAssistanceInformation* message 166
5.6.11 Mobility history information 166
5.6.11.1 General 166
5.6.11.2 Initiation 166
5.6.12 RAN-assisted WLAN interworking 167
5.6.12.1 General 167
5.6.12.2 Dedicated WLAN offload configuration 167
5.6.12.3 WLAN offload RAN evaluation 167
5.6.12.4 T350 expiry or stop 167
5.6.12.5 Cell selection/ re-selection while T350 is running 168
5.6.13 SCG failure information 168
5.6.13.1 General 168
5.6.13.2 Initiation 168
5.6.13.3 Actions related to transmission of *SCGFailureInformation* message 168
5.6.14 LTE-WLAN Aggregation 169
5.6.14.1 Introduction 169
5.6.14.2 Reception of LWA configuration 169
5.6.14.3 Release of LWA configuration 170
5.6.15 WLAN connection management 170
5.6.15.1 Introduction 170
5.6.15.2 WLAN connection status reporting 170
5.6.15.2.1 General 170
5.6.15.2.2 Initiation 171
5.6.15.2.3 Actions related to transmission of *WLANConnectionStatusReport* message 171
5.6.15.3 T351 Expiry (WLAN connection attempt timeout) 171
5.6.15.4 WLAN status monitoring 171
5.6.16 RAN controlled LTE-WLAN interworking 172
5.6.16.1 General 172
5.6.16.2 WLAN traffic steering command 172
5.6.17 LTE-WLAN aggregation with IPsec tunnel 173
5.6.17.1 General 173

DAINGEAN_0001804

5.6.17.2 LWIP reconfiguration 173
5.6.17.3 LWIP release 173
5.7 Generic error handling 174
5.7.1 General 174
5.7.2 ASN.1 violation or encoding error 174
5.7.3 Field set to a not comprehended value 174
5.7.4 Mandatory field missing 174
5.7.5 Not comprehended field 176
5.8 MBMS 176
5.8.1 Introduction 176
5.8.1.1 General 176
5.8.1.2 Scheduling 176
5.8.1.3 MCCH information validity and notification of changes 176
5.8.2 MCCH information acquisition 178
5.8.2.1 General 178
5.8.2.2 Initiation 178
5.8.2.3 MCCH information acquisition by the UE 178
5.8.2.4 Actions upon reception of the *MBSFNAreaConfiguration* message 178
5.8.2.5 Actions upon reception of the *MBMSCountingRequest* message 179
5.8.3 MBMS PTM radio bearer configuration 179
5.8.3.1 General 179
5.8.3.2 Initiation 179
5.8.3.3 MRB establishment 179
5.8.3.4 MRB release 179
5.8.4 MBMS Counting Procedure 179
5.8.4.1 General 179
5.8.4.2 Initiation 180
5.8.4.3 Reception of the *MBMSCountingRequest* message by the UE 180
5.8.5 MBMS interest indication 181
5.8.5.1 General 181
5.8.5.2 Initiation 181
5.8.5.3 Determine MBMS frequencies of interest 182
5.8.5.4 Actions related to transmission of *MBMSInterestIndication* message 183
5.8a SC-PTM 183
5.8a.1 Introduction 183
5.8a.1.1 General 183
5.8a.1.2 SC-MCCH scheduling 183
5.8a.1.3 SC-MCCH information validity and notification of changes 183
5.8a.1.4 Procedures 184
5.8a.2 SC-MCCH information acquisition 184
5.8a.2.1 General 184
5.8a.2.2 Initiation 184
5.8a.2.3 SC-MCCH information acquisition by the UE 184
5.8a.2.4 Actions upon reception of the *SCPTMConfiguration* message 185
5.8a.3 SC-PTM radio bearer configuration 185
5.8a.3.1 General 185
5.8a.3.2 Initiation 185
5.8a.3.3 SC-MRB establishment 185
5.8a.3.4 SC-MRB release 185
5.9 RN procedures 186
5.9.1 RN reconfiguration 186
5.9.1.1 General 186
5.9.1.2 Initiation 186
5.9.1.3 Reception of the *RNReconfiguration* by the RN 186
5.10 Sidelink 186
5.10.1 Introduction 186
5.10.1a Conditions for sidelink communication operation 187
5.10.2 Sidelink UE information 188
5.10.2.1 General 188
5.10.2.2 Initiation 189
5.10.2.3 Actions related to transmission of *SidelinkUEInformation* message 193
5.10.3 Sidelink communication monitoring 195

DAINGEAN_0001805

5.10.4 Sidelink communication transmission 196
5.10.5 Sidelink discovery monitoring 197
5.10.6 Sidelink discovery announcement 198
5.10.6a Sidelink discovery announcement pool selection 201
5.10.6b Sidelink discovery announcement reference carrier selection 201
5.10.7 Sidelink synchronisation information transmission 202
5.10.7.1 General 202
5.10.7.2 Initiation 203
5.10.7.3 Transmission of SLSS 204
5.10.7.4 Transmission of *MasterInformationBlock-SL* message 205
5.10.7.5 Void 206
5.10.8 Sidelink synchronisation reference 206
5.10.8.1 General 206
5.10.8.2 Selection and reselection of synchronisation reference UE (SyncRef UE) 206
5.10.9 Sidelink common control information 207
5.10.9.1 General 207
5.10.9.2 Actions related to reception of *MasterInformationBlock-SL* message 207
5.10.10 Sidelink relay UE operation 207
5.10.10.1 General 207
5.10.10.2 AS-conditions for relay related sidelink communication transmission by sidelink relay UE 207
5.10.10.3 AS-conditions for relay PS related sidelink discovery transmission by sidelink relay UE 208
5.10.10.4 Sidelink relay UE threshold conditions 208
5.10.11 Sidelink remote UE operation 208
5.10.11.1 General 208
5.10.11.2 AS-conditions for relay related sidelink communication transmission by sidelink remote UE 208
5.10.11.3 AS-conditions for relay PS related sidelink discovery transmission by sidelink remote UE 209
5.10.11.4 Selection and reselection of sidelink relay UE 209
5.10.11.5 Sidelink remote UE threshold conditions 210

6 Protocol data units, formats and parameters (tabular & ASN.1) 210
6.1 General 210
6.2 RRC messages 212
6.2.1 General message structure 212
– *EUTRA-RRC-Definitions* 212
– *BCCH-BCH-Message* 212
– *BCCH-DL-SCH-Message* 212
– *BCCH-DL-SCH-Message-BR* 213
– *MCCH-Message* 213
– *PCCH-Message* 213
– *DL-CCCH-Message* 214
– *DL-DCCH-Message* 214
– *UL-CCCH-Message* 214
– *UL-DCCH-Message* 215
– *SC-MCCH-Message* 215
6.2.2 Message definitions 216
– *CounterCheck* 216
– *CounterCheckResponse* 217
– *CSFBParametersRequestCDMA2000* 217
– *CSFBParametersResponseCDMA2000* 218
– *DLInformationTransfer* 218
– *HandoverFromEUTRAPreparationRequest* (CDMA2000) 219
– *InDeviceCoexIndication* 220
– *InterFreqRSTDMeasurementIndication* 222
– *LoggedMeasurementConfiguration* 223
– *MasterInformationBlock* 225
– *MBMSCountingRequest* 226
– *MBMSCountingResponse* 226
– *MBMSInterestIndication* 227
– *MBSFNAreaConfiguration* 228
– *MeasurementReport* 228
– *MobilityFromEUTRACommand* 229
– *Paging* 232

DAINGEAN_0001806

– *ProximityIndication* 233
– *RNReconfiguration* 234
– *RNReconfigurationComplete* 234
– *RRCConnectionReconfiguration* 235
– *RRCConnectionReconfigurationComplete* 240
– *RRCConnectionReestablishment* 241
– *RRCConnectionReestablishmentComplete* 241
– *RRCConnectionReestablishmentReject* 242
– *RRCConnectionReestablishmentRequest* 243
– *RRCConnectionReject* 243
– *RRCConnectionRelease* 244
– *RRCConnectionResume* 248
– *RRCConnectionResumeComplete* 249
– *RRCConnectionResumeRequest* 250
– *RRCConnectionRequest* 250
– *RRCConnectionSetup* 251
– *RRCConnectionSetupComplete* 252
– *SCGFailureInformation* 253
– *SCPTMConfiguration* 254
– *SecurityModeCommand* 255
– *SecurityModeComplete* 255
– *SecurityModeFailure* 256
– *SidelinkUEInformation* 256
– *SystemInformation* 258
– *SystemInformationBlockType1* 259
– *UEAssistanceInformation* 264
– *UECapabilityEnquiry* 265
– *UECapabilityInformation* 266
– *UEInformationRequest* 267
– *UEInformationResponse* 267
– *ULHandoverPreparationTransfer (CDMA2000)* 273
– *ULInformationTransfer* 274
– *WLANConnectionStatusReport* 274
6.3 RRC information elements 275
6.3.1 System information blocks 275
– *SystemInformationBlockType2* 275
– *SystemInformationBlockType3* 279
– *SystemInformationBlockType4* 282
– *SystemInformationBlockType5* 283
– *SystemInformationBlockType6* 287
– *SystemInformationBlockType7* 289
– *SystemInformationBlockType8* 290
– *SystemInformationBlockType9* 295
– *SystemInformationBlockType10* 295
– *SystemInformationBlockType11* 296
– *SystemInformationBlockType12* 297
– *SystemInformationBlockType13* 297
– *SystemInformationBlockType14* 298
– *SystemInformationBlockType15* 298
– *SystemInformationBlockType16* 299
– *SystemInformationBlockType17* 300
– *SystemInformationBlockType18* 301
– *SystemInformationBlockType19* 301
– *SystemInformationBlockType20* 304
6.3.2 Radio resource control information elements 304
– *AntennaInfo* 304
– *AntennaInfoUL* 306
– *CQI-ReportConfig* 307
– *CQI-ReportPeriodicProcExtId* 314
– *CrossCarrierSchedulingConfig* 314
– *CSI-IM-Config* 315
– *CSI-IM-ConfigId* 315

DAINGEAN_0001807

– *CSI-Process* ... 316
– *CSI-ProcessId* ... 317
– *CSI-RS-Config* ... 317
– *CSI-RS-ConfigEMIMO* ... 318
– *CSI-RS-ConfigNZP* ... 319
– *CSI-RS-ConfigNZPId* ... 320
– *CSI-RS-ConfigZP* ... 321
– *CSI-RS-ConfigZPId* ... 321
– *DMRS-Config* ... 321
– *DRB-Identity* ... 322
– *EPDCCH-Config* ... 322
– *EIMTA-MainConfig* ... 324
– *LogicalChannelConfig* ... 325
– *LWA-Configuration* ... 326
– *LWIP-Configuration* ... 326
– *RCLWI-Configuration* ... 327
– *MAC-MainConfig* ... 327
– *P-C-AndCBSR* ... 332
– *PDCCH-ConfigSCell* ... 333
– *PDCP-Config* ... 334
– *PDSCH-Config* ... 337
– *PDSCH-RE-MappingQCL-ConfigId* ... 339
– *PHICH-Config* ... 339
– *PhysicalConfigDedicated* ... 339
– *P-Max* ... 344
– *PRACH-Config* ... 344
– *PresenceAntennaPort1* ... 346
– *PUCCH-Config* ... 347
– *PUSCH-Config* ... 351
– *RACH-ConfigCommon* ... 355
– *RACH-ConfigDedicated* ... 357
– *RadioResourceConfigCommon* ... 358
– *RadioResourceConfigDedicated* ... 362
– *RLC-Config* ... 367
– *RLF-TimersAndConstants* ... 369
– *RN-SubframeConfig* ... 370
– *SchedulingRequestConfig* ... 371
– *SoundingRS-UL-Config* ... 372
– *SPS-Config* ... 375
– *TDD-Config* ... 376
– *TimeAlignmentTimer* ... 377
– *TPC-PDCCH-Config* ... 377
– *TunnelConfigLWIP* ... 378
– *UplinkPowerControl* ... 379
– *WLAN-Id-List* ... 382
– *WLAN-MobilityConfig* ... 382
6.3.3 Security control information elements ... 382
– *NextHopChainingCount* ... 382
– *SecurityAlgorithmConfig* ... 383
– *ShortMAC-I* ... 383
6.3.4 Mobility control information elements ... 383
– *AdditionalSpectrumEmission* ... 383
– *ARFCN-ValueCDMA2000* ... 383
– *ARFCN-ValueEUTRA* ... 384
– *ARFCN-ValueGERAN* ... 384
– *ARFCN-ValueUTRA* ... 384
– *BandclassCDMA2000* ... 384
– *BandIndicatorGERAN* ... 385
– *CarrierFreqCDMA2000* ... 385
– *CarrierFreqGERAN* ... 385
– *CarrierFreqsGERAN* ... 386
– *CarrierFreqListMBMS* ... 386

DAINGEAN_0001808

– *CDMA2000-Type* ... 386
– *CellIdentity* ... 387
– *CellIndexList* ... 387
– *CellReselectionPriority* ... 387
– *CellSelectionInfoCE* ... 387
– *CellReselectionSubPriority* ... 388
– *CSFB-RegistrationParam1XRTT* ... 388
– *CellGlobalIdEUTRA* ... 389
– *CellGlobalIdUTRA* ... 389
– *CellGlobalIdGERAN* ... 390
– *CellGlobalIdCDMA2000* ... 390
– *CellSelectionInfoNFreq* ... 391
– *CSG-Identity* ... 391
– *FreqBandIndicator* ... 391
– *MobilityControlInfo* ... 391
– *MobilityParametersCDMA2000 (1xRTT)* ... 393
– *MobilityStateParameters* ... 394
– *MultiBandInfoList* ... 394
– *NS-PmaxList* ... 394
– *PhysCellId* ... 395
– *PhysCellIdRange* ... 395
– *PhysCellIdRangeUTRA-FDDList* ... 395
– *PhysCellIdCDMA2000* ... 396
– *PhysCellIdGERAN* ... 396
– *PhysCellIdUTRA-FDD* ... 396
– *PhysCellIdUTRA-TDD* ... 396
– *PLMN-Identity* ... 397
– *PLMN-IdentityList3* ... 397
– *PreRegistrationInfoHRPD* ... 397
– *Q-QualMin* ... 398
– *Q-RxLevMin* ... 398
– *Q-OffsetRange* ... 398
– *Q-OffsetRangeInterRAT* ... 399
– *ReselectionThreshold* ... 399
– *ReselectionThresholdQ* ... 399
– *SCellIndex* ... 399
– *ServCellIndex* ... 400
– *SpeedStateScaleFactors* ... 400
– *SystemInfoListGERAN* ... 400
– *SystemTimeInfoCDMA2000* ... 401
– *TrackingAreaCode* ... 401
– *T-Reselection* ... 402
– *T-ReselectionEUTRA-CE* ... 402
6.3.5 Measurement information elements ... 402
– *AllowedMeasBandwidth* ... 402
– *CSI-RSRP-Range* ... 402
– *Hysteresis* ... 402
– *LocationInfo* ... 403
– *MBSFN-RSRQ-Range* ... 403
– *MeasConfig* ... 404
– *MeasDS-Config* ... 405
– *MeasGapConfig* ... 406
– *MeasId* ... 407
– *MeasIdToAddModList* ... 407
– *MeasObjectCDMA2000* ... 408
– *MeasObjectEUTRA* ... 408
– *MeasObjectGERAN* ... 412
– *MeasObjectId* ... 412
– *MeasObjectToAddModList* ... 412
– *MeasObjectUTRA* ... 413
– *MeasObjectWLAN* ... 414
– *MeasResults* ... 415

DAINGEAN_0001809

– *MeasScaleFactor* 420
– *QuantityConfig* 420
– *ReportConfigEUTRA* 422
– *ReportConfigId* 425
– *ReportConfigInterRAT* 425
– *ReportConfigToAddModList* 428
– *ReportInterval* 429
– *RSRP-Range* 429
– *RSRQ-Range* 430
– *RSRQ-Type* 430
– *RS-SINR-Range* 430
– *RSSI-Range-r13* 431
– *TimeToTrigger* 431
– *UL-DelayConfig* 431
– *WLAN-CarrierInfo* 431
– *WLAN-RSSI-Range* 432
– *WLAN-Status* 432
6.3.6 Other information elements 433
– *AbsoluteTimeInfo* 433
– *AreaConfiguration* 433
– *C-RNTI* 433
– *DedicatedInfoCDMA2000* 434
– *DedicatedInfoNAS* 434
– *FilterCoefficient* 434
– *LoggingDuration* 434
– *LoggingInterval* 435
– *MeasSubframePattern* 435
– *MMEC* 435
– *NeighCellConfig* 435
– *OtherConfig* 436
– *RAND-CDMA2000 (1xRTT)* 437
– *RAT-Type* 437
– *ResumeIdentity* 437
– *RRC-TransactionIdentifier* 438
– *S-TMSI* 438
– *TraceReference* 438
– *UE-CapabilityRAT-ContainerList* 438
– *UE-EUTRA-Capability* 439
– *UE-RadioPagingInfo* 469
– *UE-TimersAndConstants* 469
– *VisitedCellInfoList* 470
– *WLAN-OffloadConfig* 470
6.3.7 MBMS information elements 472
– *MBMS-NotificationConfig* 472
– *MBMS-ServiceList* 473
– *MBSFN-AreaId* 473
– *MBSFN-AreaInfoList* 473
– *MBSFN-SubframeConfig* 474
– *PMCH-InfoList* 475
6.3.7a SC-PTM information elements 476
– *SC-MTCH-InfoList* 476
– *SCPTM-NeighbourCellList* 478
6.3.8 Sidelink information elements 478
– *SL-CommConfig* 478
– *SL-CommResourcePool* 479
– *SL-CP-Len* 480
– *SL-DiscConfig* 481
– *SL-DiscResourcePool* 483
– *SL-DiscTxPowerInfo* 485
– *SL-GapConfig* 485
– *SL-GapRequest* 486
– *SL-HoppingConfig* 486

DAINGEAN_0001810

– *SL-OffsetIndicator* ... 487
– *SL-PeriodComm* ... 487
– *SL-Priority* ... 487
– *SLSSID* ... 488
– *SL-SyncConfig* ... 488
– *SL-DiscSysInfoReport* ... 490
– *SL-TF-ResourceConfig* ... 491
– *SL-TxParameters* ... 491
– *SL-TxPoolIdentity* ... 492
– *SL-TxPoolToReleaseList* ... 492
6.4 RRC multiplicity and type constraint values ... 492
– Multiplicity and type constraint definitions ... 492
– End of EUTRA-RRC-Definitions ... 495
6.5 PC5 RRC messages ... 495
6.5.1 General message structure ... 495
– *PC5-RRC-Definitions* ... 495
– *SBCCH-SL-BCH-Message* ... 495
6.5.2 Message definitions ... 495
– *MasterInformationBlock-SL* ... 495
– End of *PC5-RRC-Definitions* ... 496
6.6 Direct Indication Information ... 496
6.7 NB-IoT RRC messages ... 497
6.7.1 General NB-IoT message structure ... 497
– *BCCH-BCH-Message-NB* ... 497
– *BCCH-DL-SCH-Message-NB* ... 498
– *PCCH-Message-NB* ... 498
– *DL-CCCH-Message-NB* ... 498
– *DL-DCCH-Message-NB* ... 499
– *UL-CCCH-Message-NB* ... 499
– *UL-DCCH-Message-NB* ... 499
6.7.2 NB-IoT Message definitions ... 500
– *DLInformationTransfer-NB* ... 500
– *MasterInformationBlock-NB* ... 500
– *Paging-NB* ... 502
– *RRCConnectionReconfiguration-NB* ... 502
– *RRCConnectionReconfigurationComplete-NB* ... 503
– *RRCConnectionReestablishment-NB* ... 503
– *RRCConnectionReestablishmentComplete-NB* ... 504
– *RRCConnectionReestablishmentRequest-NB* ... 504
– *RRCConnectionReject-NB* ... 505
– *RRCConnectionRelease-NB* ... 506
– *RRCConnectionResume-NB* ... 507
– *RRCConnectionResumeComplete-NB* ... 507
– *RRCConnectionRequest-NB* ... 508
– *RRCConnectionResumeRequest-NB* ... 508
– *RRCConnectionSetup-NB* ... 509
– *RRCConnectionSetupComplete-NB* ... 510
– *SystemInformation-NB* ... 510
– *SystemInformationBlockType1-NB* ... 511
– *UECapabilityEnquiry-NB* ... 514
– *UECapabilityInformation-NB* ... 514
– *ULInformationTransfer-NB* ... 515
6.7.3 NB-IoT information elements ... 515
6.7.3.1 NB-IoT System information blocks ... 515
– *SystemInformationBlockType2-NB* ... 515
– *SystemInformationBlockType3-NB* ... 516
– *SystemInformationBlockType4-NB* ... 517
– *SystemInformationBlockType5-NB* ... 517
– *SystemInformationBlockType14-NB* ... 518
– *SystemInformationBlockType16-NB* ... 519
6.7.3.2 NB-IoT Radio resource control information elements ... 519
– *CarrierConfigDedicated-NB* ... 519

DAINGEAN_0001811

– *CarrierFreq-NB* 520
– *DL-Bitmap-NB* 521
– *DL-GapConfig-NB* 521
– *LogicalChannelConfig-NB* 522
– *MAC-MainConfig-NB* 522
– *NPDCCH-ConfigDedicated-NB* 524
– *NPDSCH-ConfigCommon-NB* 524
– *NPRACH-ConfigSIB-NB* 524
– *NPUSCH-Config-NB* 525
– *PDCP-Config-NB* 527
– *PhysicalConfigDedicated-NB* 528
– *RACH-ConfigCommon-NB* 528
– *RadioResourceConfigCommonSIB-NB* 529
– *RadioResourceConfigDedicated-NB* 530
– *RLC-Config-NB* 531
– *RLF-TimersAndConstants-NB* 532
– *UplinkPowerControl-NB* 532
6.7.3.3 NB-IoT Security control information elements 533
6.7.3.4 NB-IoT Mobility control information elements 533
– *FreqBandIndicator-NB* 533
– *MultiBandInfoList-NB* 533
– *T-Reselection-NB* 534
6.7.3.5 NB-IoT Measurement information elements 534
6.7.3.6 NB-IoT Other information elements 534
– *EstablishmentCause-NB* 534
– *UE-Capability-NB* 534
– *UE-RadioPagingInfo-NB* 536
– *UE-TimersAndConstants-NB* 536
6.7.4 NB-IoT RRC multiplicity and type constraint values 536
– Multiplicity and type constraint definitions 536
– End of NBIOT-RRC-Definitions 537
6.7.5 Direct Indication Information 537

7 Variables and constants 537
7.1 UE variables 537
– *EUTRA-UE-Variables* 537
– *VarConnEstFailReport* 538
– *VarLogMeasConfig* 538
– *VarLogMeasReport* 539
– *VarMeasConfig* 539
– *VarMeasReportList* 540
– *VarMobilityHistoryReport* 540
– *VarRLF-Report* 541
– *VarShortMAC-Input* 541
– *VarShortResumeMAC-Input* 541
– *VarWLAN-MobilityConfig* 542
– *VarWLAN-Status* 542
– Multiplicity and type constraint definitions 542
– End of *EUTRA-UE-Variables* 543
7.1a NB-IoT UE variables 543
– *NBIOT-UE-Variables* 543
– End of *NBIOT-UE-Variables* 543
7.2 Counters 543
7.3 Timers (Informative) 543
7.4 Constants 546

8 Protocol data unit abstract syntax 546
8.1 General 546
8.2 Structure of encoded RRC messages 546
8.3 Basic production 547
8.4 Extension 547
8.5 Padding 547

DAINGEAN_0001812

9 Specified and default radio configurations 548
9.1 Specified configurations 548
9.1.1 Logical channel configurations 548
9.1.1.1 BCCH configuration 548
9.1.1.2 CCCH configuration 548
9.1.1.3 PCCH configuration 548
9.1.1.4 MCCH and MTCH configuration 548
9.1.1.5 SBCCH configuration 549
9.1.1.6 STCH configuration 549
9.1.1.7 SC-MCCH and SC-MTCH configuration 549
9.1.1.8 BR-BCCH configuration 549
9.1.2 SRB configurations 550
9.1.2.1 SRB1 550
9.1.2.1a SRB1bis 550
9.1.2.2 SRB2 550
9.2 Default radio configurations 550
9.2.1 SRB configurations 550
9.2.1.1 SRB1 550
9.2.1.2 SRB2 551
9.2.2 Default MAC main configuration 551
9.2.3 Default semi-persistent scheduling configuration 551
9.2.4 Default physical channel configuration 551
9.2.5 Default values timers and constants 552
9.3 Sidelink pre-configured parameters 552
9.3.1 Specified parameters 552
9.3.2 Pre-configurable parameters 553
– *SL-Preconfiguration* 553

10 Radio information related interactions between network nodes 555
10.1 General 555
10.2 Inter-node RRC messages 556
10.2.1 General 556
– *EUTRA-InterNodeDefinitions* 556
10.2.2 Message definitions 557
– *HandoverCommand* 557
– *HandoverPreparationInformation* 557
– *SCG-Config* 559
– *SCG-ConfigInfo* 560
– *UEPagingCoverageInformation* 562
– *UERadioAccessCapabilityInformation* 563
– *UERadioPagingInformation* 563
10.3 Inter-node RRC information element definitions 564
– *AS-Config* 564
– *AS-Context* 565
– *ReestablishmentInfo* 566
– *RRM-Config* 567
10.4 Inter-node RRC multiplicity and type constraint values 568
– Multiplicity and type constraints definitions 568
– End of *EUTRA-InterNodeDefinitions* 568
10.5 Mandatory information in *AS-Config* 568
10.6 Inter-node NB-IoT messages 569
10.6.1 General 569
– *NB-IoT-InterNodeDefinitions* 569
10.6.2 Message definitions 569
– *HandoverPreparationInformation-NB* 569
– *UEPagingCoverageInformation-NB* 570
– *UERadioAccessCapabilityInformation-NB* 570
– *UERadioPagingInformation-NB* 571
10.7 Inter-node NB-IoT RRC information element definitions 571
– *AS-Config-NB* 571
– *AS-Context-NB* 572
– *ReestablishmentInfo-NB* 572

DAINGEAN_0001813

– *RRM-Config-NB* 573
10.8 Inter-node RRC multiplicity and type constraint values 573
– Multiplicity and type constraints definitions 573
– End of *NB-IoT-InterNodeDefinitions* 573
10.9 Mandatory information in *AS-Config-NB* 573

11 UE capability related constraints and performance requirements 574
11.1 UE capability related constraints 574
11.2 Processing delay requirements for RRC procedures 574
11.3 Void 577

Annex A (informative): Guidelines, mainly on use of ASN.1 577
A.1 Introduction 577
A.2 Procedural specification 577
A.2.1 General principles 577
A.2.2 More detailed aspects 577
A.3 PDU specification 578
A.3.1 General principles 578
A.3.1.1 ASN.1 sections 578
A.3.1.2 ASN.1 identifier naming conventions 578
A.3.1.3 Text references using ASN.1 identifiers 579
A.3.2 High-level message structure 580
A.3.3 Message definition 580
A.3.4 Information elements 582
A.3.5 Fields with optional presence 583
A.3.7 Guidelines on use of lists with elements of SEQUENCE type 584
A.4 Extension of the PDU specifications 585
A.4.1 General principles to ensure compatibility 585
A.4.2 Critical extension of messages and fields 585
A.4.3 Non-critical extension of messages 587
A.4.3.1 General principles 587
A.4.3.2 Further guidelines 587
A.4.3.3 Typical example of evolution of IE with local extensions 588
A.4.3.4 Typical examples of non critical extension at the end of a message 589
A.4.3.5 Examples of non-critical extensions not placed at the default extension location 589
– *ParentIE-WithEM* 590
– *ChildIE1-WithoutEM* 590
– *ChildIE2-WithoutEM* 591
A.5 Guidelines regarding inclusion of transaction identifiers in RRC messages 591
A.6 Protection of RRC messages (informative) 592
A.7 Miscellaneous 594

Annex B (normative): Release 8 and 9 AS feature handling 594
B.1 Feature group indicators 594
B.2 CSG support 602

Annex C (normative): Release 10 AS feature handling 603
C.1 Feature group indicators 603

Annex D (informative): Descriptive background information 606
D.1 Signalling of Multiple Frequency Band Indicators (Multiple FBI) 606
D.1.1 Mapping between frequency band indicator and multiple frequency band indicator 606
D.1.2 Mapping between inter-frequency neighbour list and multiple frequency band indicator 606
D.1.3 Mapping between UTRA FDD frequency list and multiple frequency band indicator 607

Annex E (normative): TDD/FDD differentiation of FGIs/capabilities in TDD-FDD CA 609

Annex F (informative): Change history 610

DAINGEAN_0001814

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

DAINGEAN_0001815

1 Scope

The present document specifies the Radio Resource Control protocol for the radio interface between UE and E-UTRAN as well as for the radio interface between RN and E-UTRAN.

The scope of the present document also includes:

- the radio related information transported in a transparent container between source eNB and target eNB upon inter eNB handover;
- the radio related information transported in a transparent container between a source or target eNB and another system upon inter RAT handover.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] Void.

[3] 3GPP TS 36.302: "Evolved Universal Terrestrial Radio Access (E-UTRA); Services provided by the physical layer ".

[4] 3GPP TS 36.304: "Evolved Universal Terrestrial Radio Access (E-UTRA); UE Procedures in Idle Mode".

[5] 3GPP TS 36.306 "Evolved Universal Terrestrial Radio Access (E-UTRA); UE Radio Access Capabilities".

[6] 3GPP TS 36.321: "Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification".

[7] 3GPP TS 36.322:"Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Link Control (RLC) protocol specification".

[8] 3GPP TS 36.323: "Evolved Universal Terrestrial Radio Access (E-UTRA); Packet Data Convergence Protocol (PDCP) Specification".

[9] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access (E-UTRAN); Overall description; Stage 2".

[10] 3GPP TS 22.011: "Service accessibility".

[11] 3GPP TS 23.122: "Non-Access-Stratum (NAS) functions related to Mobile Station (MS) in idle mode".

[12] 3GPP2 C.S0002-F v1.0: "Physical Layer Standard for cdma2000 Spread Spectrum Systems".

[13] ITU-T Recommendation X.680 (07/2002) "Information Technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation" (Same as the ISO/IEC International Standard 8824-1).

DAINGEAN_0001816

[14] ITU-T Recommendation X.681 (07/2002) "Information Technology - Abstract Syntax Notation One (ASN.1): Information object specification" (Same as the ISO/IEC International Standard 8824-2).

[15] ITU-T Recommendation X.691 (07/2002) "Information technology - ASN.1 encoding rules: Specification of Packed Encoding Rules (PER)" (Same as the ISO/IEC International Standard 8825-2).

[16] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".

[17] 3GPP TS 25.101: "Universal Terrestrial Radio Access (UTRA); User Equipment (UE) radio transmission and reception (FDD)".

[18] 3GPP TS 25.102: "Universal Terrestrial Radio Access (UTRA); User Equipment (UE) radio transmission and reception (TDD)".

[19] 3GPP TS 25.331:"Universal Terrestrial Radio Access (UTRA); Radio Resource Control (RRC); Protocol specification".

[20] 3GPP TS 45.005: "Radio transmission and reception".

[21] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".

[22] 3GPP TS 36.212: "Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding".

[23] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".

[24] 3GPP2 C.S0057-E v1.0: "Band Class Specification for cdma2000 Spread Spectrum Systems".

[25] 3GPP2 C.S0005-F v1.0: "Upper Layer (Layer 3) Signaling Standard for cdma2000 Spread Spectrum Systems".

[26] 3GPP2 C.S0024-C v2.0: "cdma2000 High Rate Packet Data Air Interface Specification".

[27] 3GPP TS 23.003: "Numbering, addressing and identification".

[28] 3GPP TS 45.008: "Radio subsystem link control".

[29] 3GPP TS 25.133: "Requirements for Support of Radio Resource Management (FDD)".

[30] 3GPP TS 25.123: "Requirements for Support of Radio Resource Management (TDD)".

[31] 3GPP TS 36.401: "Evolved Universal Terrestrial Radio Access (E-UTRA); Architecture description".

[32] 3GPP TS 33.401: "3GPP System Architecture Evolution (SAE); Security architecture".

[33] 3GPP2 A.S0008-C v4.0: "Interoperability Specification (IOS) for High Rate Packet Data (HRPD) Radio Access Network Interfaces with Session Control in the Access Network"

[34] 3GPP2 C.S0004-F v1.0: "Signaling Link Access Control (LAC) Standard for cdma2000 Spread Spectrum Systems"

[35] 3GPP TS 24.301: "Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3".

[36] 3GPP TS 44.060: "General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol".

[37] 3GPP TS 23.041: "Technical realization of Cell Broadcast Service (CBS)".

[38] 3GPP TS 23.038: "Alphabets and Language".

DAINGEAN_0001817

[39] 3GPP TS 36.413: "Evolved Universal Terrestrial Radio Access (E-UTRAN); S1 Application Protocol (S1 AP)".

[40] 3GPP TS 25.304: "Universal Terrestrial Radio Access (UTRAN); User Equipment (UE) procedures in idle mode and procedures for cell reselection in connected mode".

[41] 3GPP TS 23.401: "General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access".

[42] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".

[43] 3GPP TS 44.005: "Data Link (DL) Layer General Aspects".

[44] 3GPP2 C.S0087-A v2.0: "E-UTRAN - cdma2000 HRPD Connectivity and Interworking Air Interface Specification"

[45] 3GPP TS 44.018: "Mobile radio interface layer 3 specification; Radio Resource Control (RRC) protocol".

[46] 3GPP TS 25.223: "Spreading and modulation (TDD)".

[47] 3GPP TS 36.104: "Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception".

[48] 3GPP TS 36.214: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer - Measurements".

[49] 3GPP TS 24.008: "Mobile radio interface layer 3 specification; Core network protocols; Stage 3".

[50] 3GPP TS 45.010:"Radio subsystem synchronization".

[51] 3GPP TS 23.272: "Circuit Switched Fallback in Evolved Packet System; Stage 2".

[52] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting packet based services and Packet Data Networks (PDN)".

[53] 3GPP2 C.S0097-0 v3.0: "E-UTRAN - cdma2000 1x Connectivity and Interworking Air Interface Specification".

[54] 3GPP TS 36.355: "LTE Positioning Protocol (LPP)".

[55] 3GPP TS 36.216: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer for relaying operation".

[56] 3GPP TS 23.246: "Multimedia Broadcast/Multicast Service (MBMS); Architecture and functional description".

[57] 3GPP TS 26.346: "Multimedia Broadcast/Multicast Service (MBMS); Protocols and codecs".

[58] 3GPP TS 32.422: "Telecommunication management; Subsriber and equipment trace; Trace control and confiuration management".

[59] 3GPP TS 22.368: "Service Requirements for Machine Type Communications; Stage 1".

[60] 3GPP TS 37.320: "Universal Terrestrial Radio Access (UTRA) and Evolved Universal Terrestrial Radio Access (E-UTRA); Radio measurement collection for Minimization of Drive Tests (MDT); Overall description; Stage 2".

[61] 3GPP TS 23.216: "Single Radio Voice Call Continuity (SRVCC); Stage 2".

[62] 3GPP TS 22.146: "Multimedia Broadcast/Multicast Service (MBMS); Stage 1".

[63] 3GPP TR 36.816: "Evolved Universal Terrestrial Radio Access (E-UTRA); Study on signalling and procedure for interference avoidance for in-device coexistence".

[64] IS-GPS-200F: "Navstar GPS Space Segment/Navigation User Segment Interfaces".

DAINGEAN_0001818

[65] 3GPP TS 25.307: "Requirement on User Equipments (UEs) supporting a release-independent frequency band".

[66] 3GPP TS 24.312: "Access Network Discovery and Selection Function (ANDSF) Management Object (MO)".

[67] IEEE 802.11-2012, Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications, IEEE Std.

[68] 3GPP TS 23.303: "Proximity-based services (ProSe); Stage 2".

[69] 3GPP TS 24.334: "Proximity-services (ProSe) User Equipment (UE) to ProSe function protocol aspects; Stage 3".

[70] 3GPP TS 24.333: "Proximity-services (ProSe) Management Objects (MO)".

[71] 3GPP TS 36.314: "Evolved Universal Terrestrial Radio Access (E-UTRA); Layer 2-Measurements".

[72] 3GPP TS 24.105: "Application specific Congestion control for Data Communication (ACDC) Management Object (MO)".

[73] 3GPP TS 23.179: "Functional architecture and information flows to support mission critical communication services; Stage 2".

[74] 3GPP TS 24.302: "Access to the 3GPP Evolved Packet Core (EPC) via non-3GPP access networks".

[75] 3GPP TS 23.402: "Architecture enhancements for non-3GPP accesses; Stage-2".

[76] Wi-Fi Alliance® Technical Committee, Hotspot 2.0 Technical Task Group Hotspot 2.0 (Release 2) Technical Specification Version 3.11.

[77] 3GPP TS 22.101: "Service aspects; Service principles".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Anchor carrier: In NB-IoT, a carrier where the UE assumes that NPSS/NSSS/NPBCH/SIB-NB are transmitted.

Bandwidth Reduced: Refers to operation in downlink and uplink with a limited channel bandwidth of 6 PRBs.

Cellular IoT EPS Optimisation: Provides improved support of small data transfer, as defined in TS 24.301 [35].

Commercial Mobile Alert System: Public Warning System that delivers *Warning Notifications* provided by *Warning Notification Providers* to CMAS capable UEs.

Common access barring parameters: The common access barring parameters refer to the access class barring parameters that are broadcast in *SystemInformationBlockType2* outside the list of PLMN specific parameters (i.e. in *ac-BarringPerPLMN-List*).

Control plane CIoT EPS optimisation: Enables support of efficient transport of user data (IP, non-IP or SMS) over control plane via the MME without triggering data radio bearer establishment, as defined in TS 24.301 [35].

CSG member cell: A cell broadcasting the identity of the selected PLMN, registered PLMN or equivalent PLMN and for which the CSG whitelist of the UE includes an entry comprising cell's CSG ID and the respective PLMN identity.

Dual Connectivity: A UE in RRC_CONNECTED is configured with Dual Connectivity when configured with a Master and a Secondary Cell Group.

DAINGEAN_0001819

EU-Alert: Public Warning System that delivers Warning Notifications provided by Warning Notification Providers using the same AS mechanisms as defined for CMAS.

Field: The individual contents of an information element are referred as fields.

Floor: Mathematical function used to 'round down' i.e. to the nearest integer having a lower or equal value.

Information element: A structural element containing a single or multiple fields is referred as information element.

Korean Public Alert System (KPAS): Public Warning System that delivers Warning Notifications provided by Warning Notification Providers using the same AS mechanisms as defined for CMAS.

Master Cell Group: For a UE not configured with DC, the MCG comprises all serving cells. For a UE configured with DC, the MCG concerns a subset of the serving cells comprising of the PCell and zero or more secondary cells.

MBMS service: MBMS bearer service as defined in TS 23.246 [56] (i.e. provided via an MRB or an SC-MRB).

NB-IoT: NB-IoT allows access to network services via E-UTRA with a channel bandwidth limited to 180 kHz.

NB-IoT UE: A UE that uses NB-IoT.

Non-anchor carrier: In NB-IoT, a carrier where the UE does not assume that NPSS/NSSS/NPBCH/SIB-NB are transmitted.

Primary Cell: The cell, operating on the primary frequency, in which the UE either performs the initial connection establishment procedure or initiates the connection re-establishment procedure, or the cell indicated as the primary cell in the handover procedure.

Primary Secondary Cell: The SCG cell in which the UE is instructed to perform random access when performing the SCG change procedure.

Primary Timing Advance Group: Timing Advance Group containing the PCell or the PSCell.

PUCCH SCell: An SCell configured with PUCCH.

Secondary Cell: A cell, operating on a secondary frequency, which may be configured once an RRC connection is established and which may be used to provide additional radio resources.

Secondary Cell Group: For a UE configured with DC, the subset of serving cells not part of the MCG, i.e. comprising of the PSCell and zero or more other secondary cells.

Secondary Timing Advance Group: Timing Advance Group neither containing the PCell nor the PSCell. A secondary timing advance group contains at least one cell with configured uplink.

Serving Cell: For a UE in RRC_CONNECTED not configured with CA/ DC there is only one serving cell comprising of the primary cell. For a UE in RRC_CONNECTED configured with CA/ DC the term 'serving cells' is used to denote the set of one or more cells comprising of the primary cell and all secondary cells.

Sidelink: UE to UE interface for sidelink communication and sidelink discovery. The sidelink corresponds to the PC5 interface as defined in TS 23.303 [68].

Sidelink communication: AS functionality enabling ProSe Direct Communication as defined in TS 23.303 [68], between two or more nearby UEs, using E-UTRA technology but not traversing any network node.

Sidelink discovery: AS functionality enabling ProSe Direct Discovery as defined in TS 23.303 [68], using E-UTRA technology but not traversing any network node.

User plane EPS optimisation: Enables support for change from EMM-IDLE mode to EMM-CONNECTED mode without the need for using the Service Request procedure, as defined in TS 24.301 [35].

Timing Advance Group: A group of serving cells that is configured by RRC and that, for the cells with an UL configured, use the same timing reference cell and the same Timing Advance value. A Timing Advance Group only includes cells of the same cell group i.e. it either includes MCG cells or SCG cells.

DAINGEAN_0001820

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1], TS 36.300 [9] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1] or TS 36.300 [9].

1xRTT	CDMA2000 1x Radio Transmission Technology
AB	Access Barring
ACDC	Application specific Congestion control for Data Communication
ACK	Acknowledgement
AM	Acknowledged Mode
ANDSF	Access Network Discovery and Selection Function
ARQ	Automatic Repeat Request
AS	Access Stratum
ASN.1	Abstract Syntax Notation One
BCCH	Broadcast Control Channel
BCD	Binary Coded Decimal
BCH	Broadcast Channel
BL	Bandwidth reduced Low complexity
BLER	Block Error Rate
BR	Bandwidth Reduced
BR-BCCH	Bandwidth Reduced Broadcast Control Channel
CA	Carrier Aggregation
CCCH	Common Control Channel
CCO	Cell Change Order
CE	Coverage Enhancement
CG	Cell Group
CIoT	Cellular IoT
CMAS	Commercial Mobile Alert Service
CP	Control Plane
C-RNTI	Cell RNTI
CRS	Cell-specific Reference Signal
CSFB	CS fallback
CSG	Closed Subscriber Group
CSI	Channel State Information
DC	Dual Connectivity
DCCH	Dedicated Control Channel
DCI	Downlink Control Information
DFN	Direct Frame Number
DL	Downlink
DL-SCH	Downlink Shared Channel
DRB	(user) Data Radio Bearer
DRX	Discontinuous Reception
DTCH	Dedicated Traffic Channel
EAB	Extended Access Barring
eDRX	Extended DRX
EHPLMN	Equivalent Home Public Land Mobile Network
eIMTA	Enhanced Interference Management and Traffic Adaptation
ENB	Evolved Node B
EPC	Evolved Packet Core
EPDCCH	Enhanced Physical Downlink Control Channel
EPS	Evolved Packet System
ETWS	Earthquake and Tsunami Warning System
E-UTRA	Evolved Universal Terrestrial Radio Access
E-UTRAN	Evolved Universal Terrestrial Radio Access Network
FDD	Frequency Division Duplex
FFS	For Further Study
GERAN	GSM/EDGE Radio Access Network
GNSS	Global Navigation Satellite System
G-RNTI	Group RNTI
GSM	Global System for Mobile Communications

DAINGEAN_0001821

HARQ	Hybrid Automatic Repeat Request
HFN	Hyper Frame Number
HPLMN	Home Public Land Mobile Network
HRPD	CDMA2000 High Rate Packet Data
H-SFN	Hyper SFN
IDC	In-Device Coexistence
IE	Information element
IMEI	International Mobile Equipment Identity
IMSI	International Mobile Subscriber Identity
IoT	Internet of Things
ISM	Industrial, Scientific and Medical
kB	Kilobyte (1000 bytes)
L1	Layer 1
L2	Layer 2
L3	Layer 3
LAA	Licensed-Assisted Access
LWA	LTE-WLAN Aggregation
LWAAP	LTE-WLAN Aggregation Adaptation Protocol
LWIP	LTE-WLAN Radio Level Integration with IPsec Tunnel
MAC	Medium Access Control
MBMS	Multimedia Broadcast Multicast Service
MBSFN	Multimedia Broadcast multicast service Single Frequency Network
MCG	Master Cell Group
MCPTT	Mission Critical Push To Talk
MDT	Minimization of Drive Tests
MIB	Master Information Block
MO	Mobile Originating
MPDCCH	MTC Physical Downlink Control Channel
MRB	MBMS Point to Multipoint Radio Bearer
MRO	Mobility Robustness Optimisation
MSI	MCH Scheduling Information
MT	Mobile Terminating
N/A	Not Applicable
NACC	Network Assisted Cell Change
NAICS	Network Assisted Interference Cancellation/Suppression
NAS	Non Access Stratum
NB-IoT	NarrowBand Internet of Things
NPBCH	Narrowband Physical Broadcast channel
NPDCCH	Narrowband Physical Downlink Control channel
NPDSCH	Narrowband Physical Downlink Shared channel
NPRACH	Narrowband Physical Random Access channel
NPUSCH	Narrowband Physical Uplink Shared channel
NPSS	Narrowband Primary Synchronization Signal
NSSS	Narrowband Secondary Synchronization Signal
NRS	Narrowband Reference Signal
PCCH	Paging Control Channel
PCell	Primary Cell
PDCCH	Physical Downlink Control Channel
PDCP	Packet Data Convergence Protocol
PDU	Protocol Data Unit
PLMN	Public Land Mobile Network
ProSe	Proximity based Services
PS	Public Safety (in context of sidelink), Packet Switched (otherwise)
PSCell	Primary Secondary Cell
PTAG	Primary Timing Advance Group
PUCCH	Physical Uplink Control Channel
QCI	QoS Class Identifier
QoS	Quality of Service
RACH	Random Access CHannel
RAT	Radio Access Technology
RB	Radio Bearer
RCLWI	RAN Controlled LTE-WLAN Integration

DAINGEAN_0001822

RLC	Radio Link Control
RMTC	RSSI Measurement Timing Configuration
RN	Relay Node
RNTI	Radio Network Temporary Identifier
ROHC	RObust Header Compression
RPLMN	Registered Public Land Mobile Network
RRC	Radio Resource Control
RSCP	Received Signal Code Power
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSSI	Received Signal Strength Indicator
SAE	System Architecture Evolution
SAP	Service Access Point
SC	Sidelink Control
SCell	Secondary Cell
SCG	Secondary Cell Group
SC-MRB	Single Cell MRB
SC-RNTI	Single Cell RNTI
SD-RSRP	Sidelink Discovery Reference Signal Received Power
SFN	System Frame Number
SI	System Information
SIB	System Information Block
SI-RNTI	System Information RNTI
SL	Sidelink
SLSS	Sidelink Synchronisation Signal
SMC	Security Mode Control
SPS	Semi-Persistent Scheduling
SR	Scheduling Request
SRB	Signalling Radio Bearer
S-RSRP	Sidelink Reference Signal Received Power
SSAC	Service Specific Access Control
SSTD	SFN and Subframe Timing Difference
STAG	Secondary Timing Advance Group
S-TMSI	SAE Temporary Mobile Station Identifier
TA	Tracking Area
TAG	Timing Advance Group
TDD	Time Division Duplex
TDM	Time Division Multiplexing
TM	Transparent Mode
TPC-RNTI	Transmit Power Control RNTI
T-RPT	Time Resource Pattern of Transmission
TTT	Time To Trigger
UE	User Equipment
UICC	Universal Integrated Circuit Card
UL	Uplink
UL-SCH	Uplink Shared Channel
UM	Unacknowledged Mode
UP	User Plane
UTC	Coordinated Universal Time
UTRAN	Universal Terrestrial Radio Access Network
VoLTE	Voice over Long Term Evolution
WLAN	Wireless Local Area Network
WT	WLAN Termination

In the ASN.1, lower case may be used for some (parts) of the above abbreviations e.g. c-RNTI

DAINGEAN_0001823

4 General

4.1 Introduction

In this specification, (parts of) procedures and messages specified for the UE equally apply to the RN for functionality necessary for the RN. There are also (parts of) procedures and messages which are only applicable to the RN in its communication with the E-UTRAN, in which case the specification denotes the RN instead of the UE. Such RN-specific aspects are not applicable to the UE.

NB-IoT is a non backward compatible variant of E-UTRAN supporting a reduced set of functionality. In this specification, (parts of) procedures and messages specified for the UE equally apply to the UE in NB-IoT. There are also some features and related procedures and messages that are not supported by UEs in NB-IoT.

In particular, the following features are not supported in NB-IoT and corresponding procedures and messages do not apply to the UE in NB-IoT:

- Connected mode mobility (Handover and measurement reporting);
- Inter-RAT cell reselection or inter-RAT mobility in connected mode;
- CSG;
- Relay Node (RN);
- Carrier Aggregaction (CA);
- Dual connectivity (DC);
- GBR (QoS);
- ACB, EAB, SSAC and ACDC;
- MBMS;
- Self-configuration and self-optimisation;
- Measurement logging and reporting for network performance optimisation;
- Public warning systems, e.g, CMAS, ETWS and PWS;
- Real time services (including emergency call);
- CS services and CS fallback;
- In-device coexistence;
- RAN assisted WLAN interworking;
- Network-assisted interference cancellation/suppression;
- Sidelink (including direct communication and direct discovery).

NOTE: In regard to mobility, NB-IoT is a separate RAT from E-UTRAN.

In this specification, there are also (parts of) procedures and messages which are only applicable to UEs in NB-IoT, in which case this is stated explicitly.

This specification is organised as follows:

- sub-clause 4.2 describes the RRC protocol model;
- sub-clause 4.3 specifies the services provided to upper layers as well as the services expected from lower layers;
- sub-clause 4.4 lists the RRC functions;

DAINGEAN_0001824

- clause 5 specifies RRC procedures, including UE state transitions;
- clause 6 specifies the RRC message in a mixed format (i.e. tabular & ASN.1 together);
- clause 7 specifies the variables (including protocol timers and constants) and counters to be used by the UE;
- clause 8 specifies the encoding of the RRC messages;
- clause 9 specifies the specified and default radio configurations;
- clause 10 specifies the RRC messages transferred across network nodes;
- clause 11 specifies the UE capability related constraints and performance requirements.

4.2 Architecture

4.2.1 UE states and state transitions including inter RAT

A UE is in RRC_CONNECTED when an RRC connection has been established. If this is not the case, i.e. no RRC connection is established, the UE is in RRC_IDLE state. The RRC states can further be characterised as follows:

- **RRC_IDLE**:
  - A UE specific DRX may be configured by upper layers (not applicable for NB-IoT);
  - UE controlled mobility;
  - The UE:
    - Monitors a Paging channel to detect incoming calls, system information change, for ETWS capable UEs, ETWS notification, and for CMAS capable UEs, CMAS notification;
    - Performs neighbouring cell measurements and cell (re-)selection;
    - Acquires system information.
    - Performs logging of available measurements together with location and time for logged measurement configured UEs.
- **RRC_CONNECTED**:
  - Transfer of unicast data to/from UE.
  - At lower layers, the UE may be configured with a UE specific DRX.
  - For UEs supporting CA, use of one or more SCells, aggregated with the PCell, for increased bandwidth;
  - For UEs supporting DC, use of one SCG, aggregated with the MCG, for increased bandwidth;
  - Network controlled mobility, i.e. handover and cell change order with optional network assistance (NACC) to GERAN (not applicable for NB-IoT);
  - The UE:
    - Monitors a Paging channel and/ or System Information Block Type 1 contents to detect system information change, for ETWS capable UEs, ETWS notification, and for CMAS capable UEs, CMAS notification (not applicable for NB-IoT);
    - Monitors control channels associated with the shared data channel to determine if data is scheduled for it;
    - Provides channel quality and feedback information (not applicable for NB-IoT);
    - Performs neighbouring cell measurements and measurement reporting (not applicable for NB-IoT);
    - Acquires system information (not applicable for NB-IoT).

DAINGEAN_0001825

The following figure not only provides an overview of the RRC states in E-UTRA, but also illustrates the mobility support between E-UTRAN, UTRAN and GERAN.

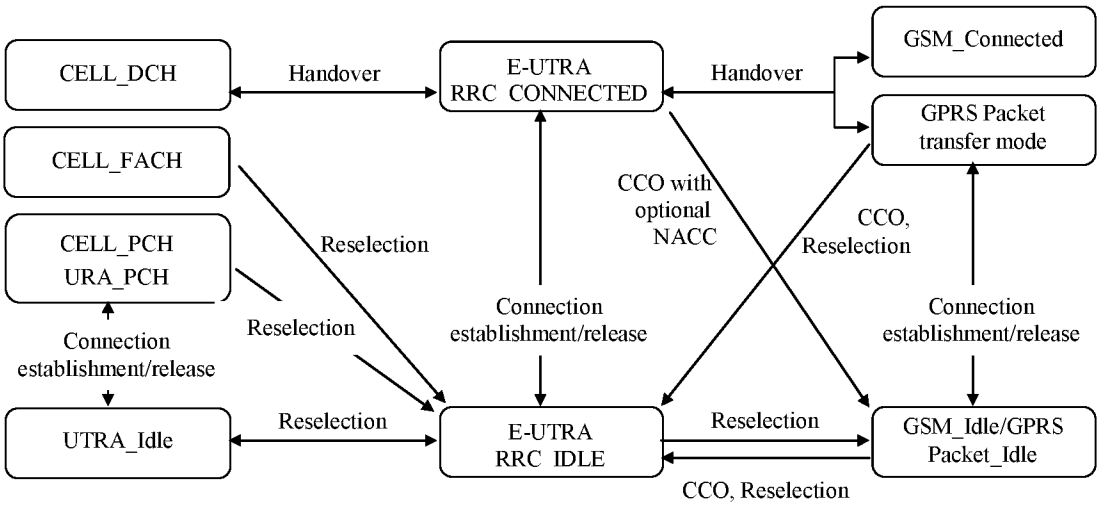


Figure 4.2.1-1: E-UTRA states and inter RAT mobility procedures, 3GPP

The following figure illustrates the mobility support between E-UTRAN, CDMA2000 1xRTT and CDMA2000 HRPD. The details of the CDMA2000 state models are out of the scope of this specification.

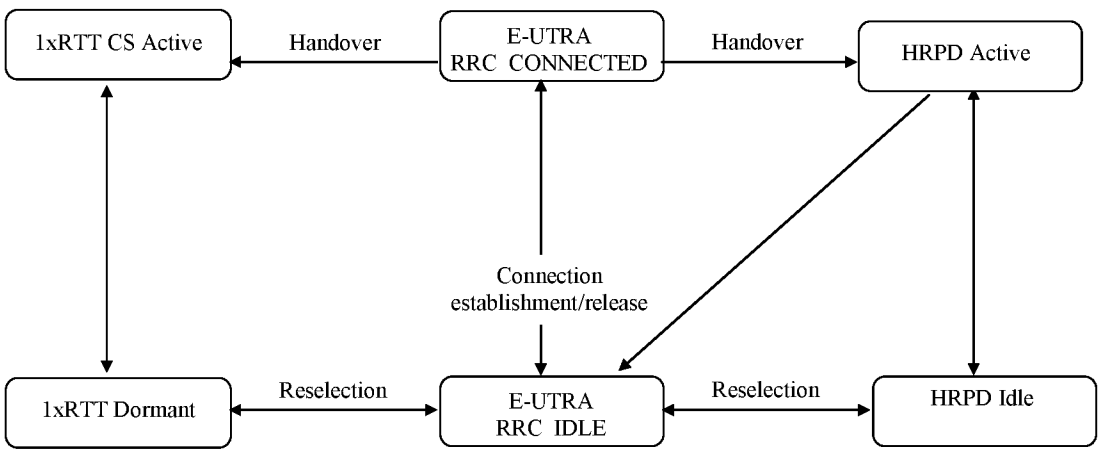


Figure 4.2.1-2: Mobility procedures between E-UTRA and CDMA2000

The inter-RAT handover procedure(s) supports the case of signalling, conversational services, non-conversational services and combinations of these.

In addition to the state transitions shown in Figure 4.2.1-1 and Figure 4.2.1-2, there is support for connection release with redirection information from E-UTRA RRC_CONNECTED to GERAN, UTRAN and CDMA2000 (HRPD Idle/ 1xRTT Dormant mode).

For NB-IoT, mobility between E-UTRA and UTRAN, GERAN and between E-UTRA and CDMA2000 1xRTT and CDMA2000 HRPD is not supported and hence only the E-UTRA states depicted in Figure 4.2.1-1 are applicable.

4.2.2 Signalling radio bearers

"Signalling Radio Bearers" (SRBs) are defined as Radio Bearers (RB) that are used only for the transmission of RRC and NAS messages. More specifically, the following SRBs are defined:

DAINGEAN_0001826

- SRB0 is for RRC messages using the CCCH logical channel;
- SRB1 is for RRC messages (which may include a piggybacked NAS message) as well as for NAS messages prior to the establishment of SRB2, all using DCCH logical channel;
- For NB-IoT, SRB1bis is for RRC messages (which may include a piggybacked NAS message) as well as for NAS messages prior to the activation of security, all using DCCH logical channel;
- SRB2 is for RRC messages which include logged measurement information as well as for NAS messages, all using DCCH logical channel. SRB2 has a lower-priority than SRB1 and is always configured by E-UTRAN after security activation. SRB2 is not applicable for NB-IoT.

In downlink piggybacking of NAS messages is used only for one dependant (i.e. with joint success/ failure) procedure: bearer establishment/ modification/ release. In uplink NAS message piggybacking is used only for transferring the initial NAS message during connection setup.

NOTE: The NAS messages transferred via SRB2 are also contained in RRC messages, which however do not include any RRC protocol control information.

Once security is activated, all RRC messages on SRB1 and SRB2, including those containing NAS or non-3GPP messages, are integrity protected and ciphered by PDCP. NAS independently applies integrity protection and ciphering to the NAS messages.

For a UE configured with DC, all RRC messages, regardless of the SRB used and both in downlink and uplink, are transferred via the MCG.

4.3 Services

4.3.1 Services provided to upper layers

The RRC protocol offers the following services to upper layers:

- Broadcast of common control information;
- Notification of UEs in RRC_IDLE, e.g. about a terminating call, for ETWS, for CMAS;
- Transfer of dedicated control information, i.e. information for one specific UE.

4.3.2 Services expected from lower layers

In brief, the following are the main services that RRC expects from lower layers:

- PDCP: integrity protection and ciphering;
- RLC: reliable and in-sequence transfer of information, without introducing duplicates and with support for segmentation and concatenation.

Further details about the services provided by Packet Data Convergence Protocol layer (e.g. integrity and ciphering) are provided in TS 36.323 [8]. The services provided by Radio Link Control layer (e.g. the RLC modes) are specified in TS 36.322 [7]. Further details about the services provided by Medium Access Control layer (e.g. the logical channels) are provided in TS 36.321 [6]. The services provided by physical layer (e.g. the transport channels) are specified in TS 36.302 [3].

4.4 Functions

The RRC protocol includes the following main functions:

- Broadcast of system information:
  - Including NAS common information;

DAINGEAN_0001827

  - Information applicable for UEs in RRC_IDLE, e.g. cell (re-)selection parameters, neighbouring cell information and information (also) applicable for UEs in RRC_CONNECTED, e.g. common channel configuration information.
  - Including ETWS notification, CMAS notification (not applicable for NB-IoT);
- RRC connection control:
  - Paging;
  - Establishment/ modification/ suspension / resumption / release of RRC connection, including e.g. assignment/ modification of UE identity (C-RNTI), establishment/ modification/ release of SRB1 and SRB2, access class barring;
  - Initial security activation, i.e. initial configuration of AS integrity protection (SRBs) and AS ciphering (SRBs, DRBs);
  - For RNs, configuration of AS integrity protection for DRBs;
  - RRC connection mobility including e.g. intra-frequency and inter-frequency handover, associated security handling, i.e. key/ algorithm change, specification of RRC context information transferred between network nodes;

NOTE 1: In NB-IoT, only key change (but no re-keying) at RRC Connection Resumption and RRC context information transfer are applicable.

  - Establishment/ modification/ release of RBs carrying user data (DRBs);
  - Radio configuration control including e.g. assignment/ modification of ARQ configuration, HARQ configuration, DRX configuration;
  - For RNs, RN-specific radio configuration control for the radio interface between RN and E-UTRAN;
  - In case of CA, cell management including e.g. change of PCell, addition/ modification/ release of SCell(s) and addition/modification/release of STAG(s);
  - In case of DC, cell management including e.g. change of PSCell, addition/ modification/ release of SCG cell(s) and addition/modification/release of SCG TAG(s).
  - QoS control including assignment/ modification of semi-persistent scheduling (SPS) configuration information for DL and UL, assignment/ modification of parameters for UL rate control in the UE, i.e. allocation of a priority and a prioritised bit rate (PBR) for each RB (not applicable for NB-IoT);
  - Recovery from radio link failure;
  - In case of LWA, RCLWI and LWIP, WLAN mobility set management including e.g. addition/ modification/ release of WLAN(s) from the WLAN mobility set;
- Inter-RAT mobility including e.g. security activation, transfer of RRC context information (not applicable for NB-IoT);
- Measurement configuration and reporting (not applicable for NB-IoT):
  - Establishment/ modification/ release of measurements (e.g. intra-frequency, inter-frequency and inter- RAT measurements);
  - Setup and release of measurement gaps;
  - Measurement reporting;
- Other functions including e.g. transfer of dedicated NAS information and non-3GPP dedicated information, transfer of UE radio access capability information, support for E-UTRAN sharing (multiple PLMN identities);
- Generic protocol error handling;
- Support of self-configuration and self-optimisation (not applicable for NB-IoT);

DAINGEAN_0001828

- Support of measurement logging and reporting for network performance optimisation [60] (not applicable for NB-IoT);

NOTE 2: Random access is specified entirely in the MAC including initial transmission power estimation.

5 Procedures

5.1 General

5.1.1 Introduction

The procedural requirements are structured according to the main functional areas: system information (5.2), connection control (5.3), inter-RAT mobility (5.4) and measurements (5.5). In addition sub-clause 5.6 covers other aspects e.g. NAS dedicated information transfer, UE capability transfer, sub-clause 5.7 specifies the generic error handling, sub-clause 5.8 covers MBMS, clause 5.8 cover SC-PTM (i.e. MBMS service reception via SC-MRB) sub-clause 5.9 covers RN-specific procedures and sub-clause 5.10 covers sidelink.

For NB-IoT, only a subset of the above procedural requirements applies: system information (5.2), connection control (5.3), some part of other aspects (5.6), and general error handling (5.7). Subclauses inter-RAT mobility (5.4), measurements (5.5), MBMS (5.8), RN procedures (5.9) and Sidelink (5.10) are not applicable in NB-IoT.

5.1.2 General requirements

The UE shall:

1> process the received messages in order of reception by RRC, i.e. the processing of a message shall be completed before starting the processing of a subsequent message;

NOTE 1: E-UTRAN may initiate a subsequent procedure prior to receiving the UE's response of a previously initiated procedure.

1> within a sub-clause execute the steps according to the order specified in the procedural description;

1> consider the term 'radio bearer' (RB) to cover SRBs and DRBs but not MRBs unless explicitly stated otherwise;

1> set the *rrc-TransactionIdentifier* in the response message, if included, to the same value as included in the message received from E-UTRAN that triggered the response message;

1> upon receiving a choice value set to *setup*:

2> apply the corresponding received configuration and start using the associated resources, unless explicitly specified otherwise;

1> upon receiving a choice value set to *release*:

2> clear the corresponding configuration and stop using the associated resources;

1> upon handover to E-UTRA; or

1> upon receiving an *RRCConnectionReconfiguration* message including the *fullConfig*:

2> apply the Conditions in the ASN.1 for inclusion of the fields for the DRB/PDCP/RLC setup during the reconfiguration of the DRBs included in the *drb-ToAddModList*;

NOTE 2: At each point in time, the UE keeps a single value for each field except for during handover when the UE temporarily stores the previous configuration so it can revert back upon handover failure. In other words: when the UE reconfigures a field, the existing value is released except for during handover.

NOTE 3: Although not explicitly stated, the UE initially considers all functionality to be deactivated/ released until it is explicitly stated that the functionality is setup/ activated. Correspondingly, the UE initially considers lists to be empty e.g. the list of radio bearers, the list of measurements.

DAINGEAN_0001829

1> upon receiving an extension field comprising the entries in addition to the ones carried by the original field (regardless of whether E-UTRAN may signal more entries in total); apply the following generic behaviour if explicitly stated to be applicable:

2> create a combined list by concatenating the additional entries included in the extension field to the original field while maintaining the order among both the original and the additional entries;

2> for the combined list, created according to the previous, apply the same behaviour as defined for the original field;

NOTE 4: A field comprising a list of entries normally includes 'list' in the field name. The typical way to extend (the size of) such a list is to introduce a field comprising the additional entries, which should include 'listExt' in the name of the field/ IE. E.g. *field1List-RAT*, *field1ListExt-RAT*.

5.2 System information

5.2.1 Introduction

5.2.1.1 General

System information is divided into the *MasterInformationBlock* (MIB) and a number of *SystemInformationBlocks* (SIBs). The MIB includes a limited number of most essential and most frequently transmitted parameters that are needed to acquire other information from the cell, and is transmitted on BCH. SIBs other than *SystemInformationBlockType1* are carried in *SystemInformation* (SI) messages and mapping of SIBs to SI messages is flexibly configurable by *schedulingInfoList* included in *SystemInformationBlockType1*, with restrictions that: each SIB is contained only in a single SI message, and at most once in that message; only SIBs having the same scheduling requirement (periodicity) can be mapped to the same SI message; *SystemInformationBlockType2* is always mapped to the SI message that corresponds to the first entry in the list of SI messages in *schedulingInfoList*. There may be multiple SI messages transmitted with the same periodicity. *SystemInformationBlockType1* and all SI messages are transmitted on DL-SCH.

The Bandwidth reduced Low Complexity (BL) UEs and UEs in Coverage Enhancement (CE) apply Bandwidth Reduced (BR) version of the SIB or SI messages. A UE considers itself in enhanced coverage as specified in TS 36.304 [4]. In this and subsequent clauses, anything applicable for a particular SIB or SI message equally applies to the corresponding BR version unless explicitly stated otherwise.

For NB-IoT, a reduced set of system information block with similar functionality but different content is defined; the UE applies the NB-IoT (NB) version of the MIB and the SIBs. These are denoted *MasterInformationBlock-NB and SystemInformationBlockTypeX-NB* in this specification. All other system information blocks (without NB suffix) are not applicable to NB-IoT; this is not further stated in the corresponding text.

NOTE 1: The physical layer imposes a limit to the maximum size a SIB can take. When DCI format 1C is used the maximum allowed by the physical layer is 1736 bits (217 bytes) while for format 1A the limit is 2216 bits (277 bytes), see TS 36.212 [22] and TS 36.213 [23]. For BL UEs and UEs in CE, the maximum SIB and SI message size is 936 bits, see TS 36.213 [23]. For NB-IoT, the maximum SIB and SI message size is 680 bits, see TS 36.213 [23].

In addition to broadcasting, E-UTRAN may provide *SystemInformationBlockType1*, including the same parameter values, via dedicated signalling i.e., within an *RRCConnectionReconfiguration* message.

The UE applies the system information acquisition and change monitoring procedures for the PCell, except when being a BL UE or a UE in CE or a NB-IoT UE in RRC_CONNECTED mode while T311 is not running. For an SCell, E-UTRAN provides, via dedicated signalling, all system information relevant for operation in RRC_CONNECTED when adding the SCell. However, a UE that is configured with DC shall aquire the *MasterInformationBlock* of the PSCell but use it only to determine the SFN timing of the SCG, which may be different from the MCG. Upon change of the relevant system information of a configured SCell, E-UTRAN releases and subsequently adds the concerned SCell, which may be done with a single *RRCConnectionReconfiguration* message. If the UE is receiving or interested to receive an MBMS service in a cell, the UE shall apply the system information acquisition and change monitoring procedure to acquire parameters relevant for MBMS operation and apply the parameters acquired from system information only for MBMS operation for this cell.

DAINGEAN_0001830

NOTE 2: E-UTRAN may configure via dedicated signalling different parameter values than the ones broadcast in the concerned SCell.

An RN configured with an RN subframe configuration does not need to apply the system information acquisition and change monitoring procedures. Upon change of any system information relevant to an RN, E-UTRAN provides the system information blocks containing the relevant system information to an RN configured with an RN subframe configuration via dedicated signalling using the *RNReconfiguration* message. For RNs configured with an RN subframe configuration, the system information contained in this dedicated signalling replaces any corresponding stored system information and takes precedence over any corresponding system information acquired through the system information acquisition procedure. The dedicated system information remains valid until overridden.

NOTE 3: E-UTRAN may configure an RN, via dedicated signalling, with different parameter values than the ones broadcast in the concerned cell.

5.2.1.2 Scheduling

The MIB uses a fixed schedule with a periodicity of 40 ms and repetitions made within 40 ms. The first transmission of the MIB is scheduled in subframe #0 of radio frames for which the SFN mod 4 = 0, and repetitions are scheduled in subframe #0 of all other radio frames. For TDD/FDD system with a bandwidth larger than 1.4 MHz that supports BL UEs or UEs in CE, MIB transmission may be repeated in subframe#9 of the previous radio frame for FDD and subframe #5 of the same radio frame for TDD.

The *SystemInformationBlockType1* uses a fixed schedule with a periodicity of 80 ms and repetitions made within 80 ms. The first transmission of *SystemInformationBlockType1* is scheduled in subframe #5 of radio frames for which the SFN mod 8 = 0, and repetitions are scheduled in subframe #5 of all other radio frames for which SFN mod 2 = 0.

For BL UEs or UEs in CE, MIB is applied which may be provided with additional repetitions, while for SIB1 and further SI messages, separate messages are used which are scheduled independently and with content that may differ. The separate instance of SIB1 is named as *SystemInformationBlockType1-BR*. The *SystemInformationBlockType1-BR* uses a schedule with a periodicity of 80ms. TBS for *SystemInformationBlockType1-BR* and the repetitions made within 80ms are indicated via *schedulingInfoSIB1-BR* in MIB.

The SI messages are transmitted within periodically occurring time domain windows (referred to as SI-windows) using dynamic scheduling. Each SI message is associated with a SI-window and the SI-windows of different SI messages do not overlap. That is, within one SI-window only the corresponding SI is transmitted. The length of the SI-window is common for all SI messages, and is configurable. Within the SI-window, the corresponding SI message can be transmitted a number of times in any subframe other than MBSFN subframes, uplink subframes in TDD, and subframe #5 of radio frames for which SFN mod 2 = 0. The UE acquires the detailed time-domain scheduling (and other information, e.g. frequency-domain scheduling, used transport format) from decoding SI-RNTI on PDCCH (see TS 36.321 [6]). For a BL UE or a UE in CE, the detailed time/frequency domain scheduling information for the SI messages is provided in *SystemInformationBlockType1-BR*.

For UEs other than BL UE or UEs in CE SI-RNTI is used to address *SystemInformationBlockType1* as well as all SI messages.

SystemInformationBlockType1 configures the SI-window length and the transmission periodicity for the SI messages.

5.2.1.2a Scheduling for NB-IoT

The *MasterInformationBlock-NB* (MIB-NB) uses a fixed schedule with a periodicity of 640 ms and repetitions made within 640 ms. The first transmission of the MIB-NB is scheduled in subframe #0 of radio frames for which the SFN mod 64 = 0 and repetitions are scheduled in subframe #0 of all other radio frames. The transmissions are arranged in 8 independently decodable blocks of 80 ms duration.

The *SystemInformationBlockType1-NB* (SIB1-NB) uses a fixed schedule with a periodicity of 2560 ms. SIB1-NB transmission occurs in subframe #4 of every other frame in 16 continuous frames. The starting frame for the first transmission of the SIB1-NB is derived from the cell PCID and the number of repetitions within the 2560 ms period and repetitions are made, equally spaced, within the 2560 ms period (see TS 36.213 [23]). TBS for *SystemInformationBlockType1-NB* and the repetitions made within the 2560 ms are indicated by *schedulingInfoSIB1* field in the MIB-NB.

The SI messages are transmitted within periodically occurring time domain windows (referred to as SI-windows) using scheduling information provided in *SystemInformationBlockType1-NB*. Each SI message is associated with a SI-

DAINGEAN_0001831

window and the SI-windows of different SI messages do not overlap. That is, within one SI-window only the corresponding SI is transmitted. The length of the SI-window is common for all SI messages, and is configurable.

Within the SI-window, the corresponding SI message can be transmitted a number of times over 2 or 8 consecutive NB-IoT downlink subframes depending on TBS.The UE acquires the detailed time/frequency domain scheduling information and other information, e.g. used transport format for the SI messages from *schedulingInfoList* field in *SystemInformationBlockType1-NB*. The UE is not required to accumulate several SI messages in parallel but may need to accumulate a SI message across multiple SI windows, depending on coverage condition.

SystemInformationBlockType1-NB configures the SI-window length and the transmission periodicity for all SI messages.

5.2.1.3 System information validity and notification of changes

Change of system information (other than for ETWS, CMAS and EAB parameters and other than for AB parameters for NB-IoT) only occurs at specific radio frames, i.e. the concept of a modification period is used. System information may be transmitted a number of times with the same content within a modification period, as defined by its scheduling. The modification period boundaries are defined by SFN values for which SFN mod m= 0, where m is the number of radio frames comprising the modification period. If H-SFN is provided in *SystemInformationBlockType1-BR*, modification period boundaries for BL UEs and UEs in CE are defined by SFN values for which (H-SFN * 1024 + SFN) mod m=0. For NB-IoT, H-SFN is always provided and the modification period boundaries are defined by SFN values for which (H-SFN * 1024 + SFN) mod m=0. The modification period is configured by system information.

To enable system information update notification for RRC_IDLE UEs using an eDRX cycle longer than or equal to the modification period, an eDRX acquisition period is defined. The boundaries of the eDRX acquisition period are determined by H-SFN values for which H-SFN mod 256 =0. For NB-IoT, the boundaries of the eDRX acquisition period are determined by H-SFN values for which H-SFN mod 1024 =0.

When the network changes (some of the) system information, it first notifies the UEs about this change, i.e. this may be done throughout a modification period. In the next modification period, the network transmits the updated system information. These general principles are illustrated in figure 5.2.1.3-1, in which different colours indicate different system information. Upon receiving a change notification, the UE using a DRX cycle that is smaller than or equal to the modification period acquires the new system information immediately from the start of the next modification period. Upon receiving a change notification applicable to eDRX, a UE in RRC_IDLE using a DRX cycle that is longer than the modification period acquires the updated system information immediately from the start of the next eDRX acquisition period. The UE applies the previously acquired system information until the UE acquires the new system information. The possible boundaries of modification for *SystemInformationBlockType1-BR* are defined by SFN values for which SFN mod 512 = 0 except for notification of ETWS/CMAS for which the eNB may change *SystemInformationBlockType1-BR* content at any time. For NB-IoT, the possible boundaries of modification for *SystemInformationBlockType1-NB* are defined by SFN values for which (H-SFN * 1024 + SFN) mod 4096 = 0.

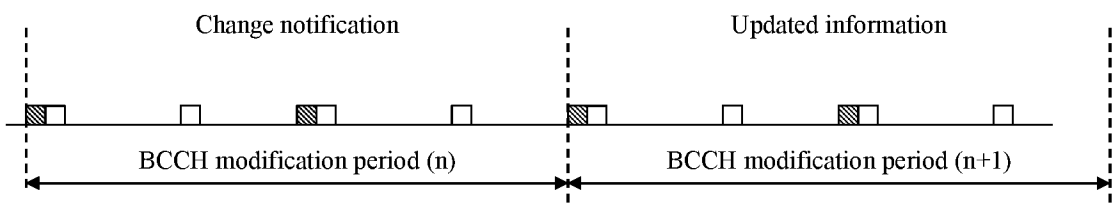


Figure 5.2.1.3-1: Change of system Information

The *Paging* message is used to inform UEs in RRC_IDLE and UEs in RRC_CONNECTED about a system information change. If the UE is in RRC_CONNECTED or uses a DRX cycle shorter than or equal to the modification period, and receives a *Paging* message including the *systemInfoModification*, it knows that the system information will change at the next modification period boundary. If a UE in RRC_IDLE uses a DRX cycle longer than the modification period, and the notification is received in a *Paging* message including the *systemInfoModification-eDRX* , it acquires the updated system information at the next eDRX acquisition period boundary.Although the UE may be informed about changes in system information, no further details are provided e.g. regarding which system information will change, except if *systemInfoSIValueTag* is received by BL UEs or UEs in CE.

DAINGEAN_0001832

In RRC_CONNECTED, BL UEs or UEs in CE or NB-IoT UEs are not required to acquire system information except when T311 is running. In RRC_IDLE, E-UTRAN may notify BL UEs or UEs in CE or NB-IoT UEs about SI update, and except for NB-IoT, ETWS and CMAS notification and EAB modification, using Direct Indication information, as specified in 6.6 (or 6.7.5 in NB-IoT) and TS 36.212 [22].

SystemInformationBlockType1 (or *MasterInformationBlock-NB* in NB-IoT) includes a value tag *systemInfoValueTag*, that indicates if a change has occurred in the SI messages. UEs may use *systemInfoValueTag*, e.g. upon return from out of coverage, to verify if the previously stored SI messages are still valid. Additionally, for other than BL UEs or UEs in CE or NB-IoT UEs, the UE considers stored system information to be invalid after 3 hours from the moment it was successfully confirmed as valid, unless specified otherwise. BL UE or UE in CE considers stored system information to be invalid after 24 hours from the moment it was successfully confirmed as valid, unless the UE is configured by parameter *si-ValidityTime* to consider stored system information to be invalid 3 hours after validity confirmation. NB-IoT UE considers stored system information to be invalid after 24 hours from the moment it was successfully confirmed as valid.

For BL UEs or UEs in CE or NB-IoT UEs, the change of specific SI message can additionally be indicated by a SI message specific value tag *systemInfoValueTagSI*. If *systemInfoValueTag* included in the *SystemInformationBlockType1-BR* (or *MasterInformationBlock-NB* in NB-IoT) is different from the one of the stored system information and if *systemInfoValueTagSI* is included in the *SystemInformationBlockType1-BR* (or *SystemInformationBlockType1-NB* in NB-IoT) for a specific SI message and is different from the stored one, the UE shall consider this specific SI message to be invalid. If only *systemInfoValueTag* is included and is different from the stored one, the BL UE or UE in CE should consider any stored system information except *SystemInformationBlockType10*, *SystemInformationBlockType11*, *SystemInformationBlockType12* and *SystemInformationBlockType14* to be invalid; the NB-IoT UE should consider any stored system information except *SystemInformationBlockType14-NB* to be invalid.

E-UTRAN may not update *systemInfoValueTag* upon change of some system information e.g. ETWS information, CMAS information, regularly changing parameters like time information (*SystemInformationBlockType8*, *SystemInformationBlockType16, hyperSFN-MSB* in *SystemInformationBlockType1-NB*), EAB and AB parameters. Similarly, E-UTRAN may not include the *systemInfoModification* within the *Paging* message upon change of some system information.

The UE using a DRX cycle shorter than or equal to the modification period verifies that stored system information remains valid by either checking *systemInfoValueTag* in *SystemInformationBlockType1* (or *MasterInformationBlock-NB* in NB-IoT) after the modification period boundary, or attempting to find the *systemInfoModification* indication at least *modificationPeriodCoeff* times during the modification period in case no paging is received, in every modification period. If no paging message is received by the UE during a modification period, the UE may assume that no change of system information will occur at the next modification period boundary. Except for NB-IoT, if UE in RRC_CONNECTED, during a modification period, receives one paging message, it may deduce from the presence/ absence of *systemInfoModification* whether a change of system information other than ETWS information, CMAS information and EAB parameters will occur in the next modification period or not.

When the RRC_IDLE UE is configured with a DRX cycle that is longer than the modification period, and more than one modification period has passed since the UE last verified validity of stored system information, the UE verifies that stored system information remains valid by checking the *systemInfoValueTag* before establishing or resuming an RRC connection.

ETWS and/or CMAS capable UEs in RRC_CONNECTED shall attempt to read paging at least once every *defaultPagingCycle* to check whether ETWS and/or CMAS notification is present or not.

5.2.1.4 Indication of ETWS notification

ETWS primary notification and/ or ETWS secondary notification can occur at any point in time. The *Paging* message is used to inform ETWS capable UEs in RRC_IDLE and UEs in RRC_CONNECTED about presence of an ETWS primary notification and/ or ETWS secondary notification. If the UE receives a *Paging* message including the *etws-Indication*, it shall start receiving the ETWS primary notification and/ or ETWS secondary notification according to *schedulingInfoList* contained in *SystemInformationBlockType1*. If the UE receives *Paging* message including the *etws-Indication* while it is acquiring ETWS notification(s), the UE shall continue acquiring ETWS notification(s) based on the previously acquired *schedulingInfoList* until it re-acquires *schedulingInfoList* in *SystemInformationBlockType1*.

DAINGEAN_0001833

NOTE: The UE is not required to periodically check *schedulingInfoList* contained in *SystemInformationBlockType1*, but *Paging* message including the *etws-Indication* triggers the UE to re-acquire *schedulingInfoList* contained in *SystemInformationBlockType1* for scheduling changes for *SystemInformationBlockType10* and *SystemInformationBlockType11*. The UE may or may not receive a *Paging* message including the *etws-Indication* and/or *systemInfoModification* when ETWS is no longer scheduled.

ETWS primary notification is contained in *SystemInformationBlockType10* and ETWS secondary notification is contained in *SystemInformationBlockType11*. Segmentation can be applied for the delivery of a secondary notification. The segmentation is fixed for transmission of a given secondary notification within a cell (i.e. the same segment size for a given segment with the same *messageIdentifier*, *serialNumber* and *warningMessageSegmentNumber*). An ETWS secondary notification corresponds to a single *CB data* IE as defined according to TS 23.041 [37].

5.2.1.5 Indication of CMAS notification

CMAS notification can occur at any point in time. The *Paging* message is used to inform CMAS capable UEs in RRC_IDLE and UEs in RRC_CONNECTED about presence of one or more CMAS notifications. If the UE receives a *Paging* message including the *cmas-Indication*, it shall start receiving the CMAS notifications according to *schedulingInfoList* contained in *SystemInformationBlockType1*. If the UE receives *Paging* message including the *cmas-Indication* while it is acquiring CMAS notification(s), the UE shall continue acquiring CMAS notification(s) based on the previously acquired *schedulingInfoList* until it re-acquires *schedulingInfoList* in *SystemInformationBlockType1*.

NOTE: The UE is not required to periodically check *schedulingInfoList* contained in *SystemInformationBlockType1*, but *Paging* message including the *cmas-Indication* triggers the UE to re-acquire *schedulingInfoList* contained in *SystemInformationBlockType1* for scheduling changes for *SystemInformationBlockType12*. The UE may or may not receive a *Paging* message including the *cmas-Indication* and/or *systemInfoModification* when *SystemInformationBlockType12* is no longer scheduled.

CMAS notification is contained in *SystemInformationBlockType12*. Segmentation can be applied for the delivery of a CMAS notification. The segmentation is fixed for transmission of a given CMAS notification within a cell (i.e. the same segment size for a given segment with the same *messageIdentifier*, *serialNumber* and *warningMessageSegmentNumber*). E-UTRAN does not interleave transmissions of CMAS notifications, i.e. all segments of a given CMAS notification transmission are transmitted prior to those of another CMAS notification. A CMAS notification corresponds to a single *CB data* IE as defined according to TS 23.041 [37].

5.2.1.6 Notification of EAB parameters change

Change of EAB parameters can occur at any point in time. The EAB parameters are contained in *SystemInformationBlockType14*. The *Paging* message is used to inform EAB capable UEs in RRC_IDLE about a change of EAB parameters or that *SystemInformationBlockType14* is no longer scheduled. If the UE receives a *Paging* message including the *eab-ParamModification*, it shall acquire *SystemInformationBlockType14* according to *schedulingInfoList* contained in *SystemInformationBlockType1*. If the UE receives a *Paging* message including the *eab-ParamModification* while it is acquiring *SystemInformationBlockType14*, the UE shall continue acquiring *SystemInformationBlockType14* based on the previously acquired *schedulingInfoList* until it re-acquires *schedulingInfoList* in *SystemInformationBlockType1*.

NOTE: The EAB capable UE is not expected to periodically check *schedulingInfoList* contained in *SystemInformationBlockType1*.

5.2.1.7 Access Barring parameters change in NB-IoT

Change of Access Barrring (AB) parameters can occur at any point in time. The AB parameters are contained in *SystemInformationBlockType14-NB*. Update of the AB parameters does not impact the *systemInfoValueTag* in the *MasterInformationBlock-NB* or the *systemInfoValueTagSI* in *SystemInformationBlockType1-NB*.

A NB-IoT UE checks *ab-Enabled* indication in the*MasterInformationBlock-NB* to know whether access barring is enabled. If access barring is enabled the UE shall not initiate the RRC connection establishment / resume until the UE has a valid version of *SystemInformationBlockType14-NB*.

DAINGEAN_0001834

5.2.2 System information acquisition

5.2.2.1 General

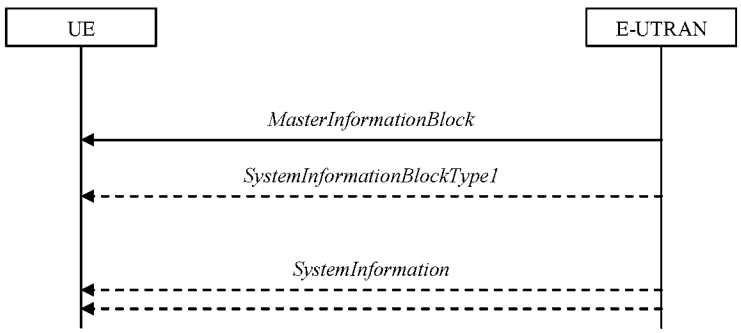


Figure 5.2.2.1-1: System information acquisition, normal

The UE applies the system information acquisition procedure to acquire the AS- and NAS- system information that is broadcasted by the E-UTRAN. The procedure applies to UEs in RRC_IDLE and UEs in RRC_CONNECTED.

For BL UE, UE in CE and NB-IoT UE, specific conditions apply, as specified below.

5.2.2.2 Initiation

The UE shall apply the system information acquisition procedure upon selecting (e.g. upon power on) and upon re-selecting a cell, after handover completion, after entering E-UTRA from another RAT, upon return from out of coverage, upon receiving a notification that the system information has changed, upon receiving an indication about the presence of an ETWS notification, upon receiving an indication about the presence of a CMAS notification, upon receiving a notification that the EAB parameters have changed, upon receiving a request from CDMA2000 upper layers and upon exceeding the maximum validity duration. Unless explicitly stated otherwise in the procedural specification, the system information acquisition procedure overwrites any stored system information, i.e. delta configuration is not applicable for system information and the UE discontinues using a field if it is absent in system information unless explicitly specified otherwise.

For BL UEs and UEs in CE, all SI information required by the UE in RRC_CONNECTED except MIB is provided by the eNB at handover with dedicated signalling.

5.2.2.3 System information required by the UE

The UE shall:

1> ensure having a valid version, as defined below, of (at least) the following system information, also referred to as the 'required' system information:

2> if in RRC_IDLE:

3> if the UE is a NB-IoT UE:

4> the *MasterInformationBlock-NB* and *SystemInformationBlockType1-NB* as well as *SystemInformationBlockType2-NB* through *SystemInformationBlockType5-NB*;

3> else:

4> the *MasterInformationBlock* and *SystemInformationBlockType1* (or *SystemInformationBlockType1-BR* depending on whether the UE is a BL UE or the UE in CE) as well as *SystemInformationBlockType2* through *SystemInformationBlockType8* (depending on support of the concerned RATs), *SystemInformationBlockType17* (depending on support of RAN-assisted WLAN interworking);

2> if in RRC_CONNECTED; and

2> the UE is not a BL UE; and

DAINGEAN_0001835

2> the UE is not in CE; and

2> the UE is not a NB-IoT UE:

3> the *MasterInformationBlock*, *SystemInformationBlockType1* and *SystemInformationBlockType2* as well as *SystemInformationBlockType8* (depending on support of CDMA2000), *SystemInformationBlockType17* (depending on support of RAN-assisted WLAN interworking);

2> if in RRC_CONNECTED and T311 is running; and

2> the UE is a BL UE or the UE is in CE;

3> the *MasterInformationBlock*, *SystemInformationBlockType1-BR* and *SystemInformationBlockType2*;

NOTE: E-UTRAN may release BL UEs or UEs in CE or NB-IoT UEs to RRC_IDLE if these UEs need to acquire changed system information.

1> delete any stored system information after 3 hours or 24 hours from the moment it was confirmed to be valid as defined in 5.2.1.3, unless specified otherwise;

1> consider any stored system information except *SystemInformationBlockType10, SystemInformationBlockType11, systemInformationBlockType12* and *systemInformationBlockType14* (*systemInformationBlockType14-NB* in NB-IoT) to be invalid if *systemInfoValueTag* included in the *SystemInformationBlockType1* (*MasterInformationBlock-NB* in NB-IoT) is different from the one of the stored system information and in case of NB-IoT UEs, BL UEs and UEs in CE, *systemInfoValueTagSI* is not broadcasted. Otherwise consider system information validity as defined in 5.2.1.3;

5.2.2.4 System information acquisition by the UE

The UE shall:

1> apply the specified BCCH configuration defined in 9.1.1.1 or BR-BCCH configuration defined in 9.1.1.8;

1> if the procedure is triggered by a system information change notification:

2> if the UE uses an idle DRX cycle longer than the modification period:

3> start acquiring the required system information, as defined in 5.2.2.3, from the next eDRX acquisition period boundary;

2> else

3> start acquiring the required system information, as defined in 5.2.2.3, from the beginning of the modification period following the one in which the change notification was received;

NOTE 1: The UE continues using the previously received system information until the new system information has been acquired.

1> if the UE is in RRC_IDLE and enters a cell for which the UE does not have stored a valid version of the system information required in RRC_IDLE, as defined in 5.2.2.3:

2> acquire, using the system information acquisition procedure as defined in 5.2.3, the system information required in RRC_IDLE, as defined in 5.2.2.3;

1> following successful handover completion to a PCell for which the UE does not have stored a valid version of the system information required in RRC_CONNECTED, as defined in 5.2.2.3:

2> acquire, using the system information acquisition procedure as defined in 5.2.3, the system information required in RRC_CONNECTED, as defined in 5.2.2.3;

2> upon acquiring the concerned system information:

3> discard the corresponding radio resource configuration information included in the *radioResourceConfigCommon* previously received in a dedicated message, if any;

1> following a request from CDMA2000 upper layers:

DAINGEAN_0001836

2> acquire *SystemInformationBlockType8*, as defined in 5.2.3;

1> neither initiate the RRC connection establishment procedure nor initiate transmission of the *RRCConnectionReestablishmentRequest* message until the UE has a valid version of the *MasterInformationBlock* (*MasterInformationBlock-NB* in NB-IoT) and *SystemInformationBlockType1* (*SystemInformationBlockType1-NB* in NB-IoT) messages as well as *SystemInformationBlockType2* (*SystemInformationBlockType2-NB* in NB-IoT);

1> not initiate the RRC connection establishment subject to EAB until the UE has a valid version of *SystemInformationBlockType14*, if broadcast;

1> if the UE is ETWS capable:

2> upon entering a cell during RRC_IDLE, following successful handover or upon connection re-establishment:

3> discard any previously buffered *warningMessageSegment*;

3> clear, if any, the current values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*;

2> when the UE acquires *SystemInformationBlockType1* following ETWS indication, upon entering a cell during RRC_IDLE, following successful handover or upon connection re-establishment:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType10* is present:

4> if the UE is in CE:

5> start acquiring *SystemInformationBlockType10*;

4> else

5> start acquiring *SystemInformationBlockType10* immediately;

3> if *schedulingInfoList* indicates that *SystemInformationBlockType11* is present:

4> start acquiring *SystemInformationBlockType11* immediately;

NOTE 2: UEs shall start acquiring *SystemInformationBlockType10* and *SystemInformationBlockType11* as described above even when *systemInfoValueTag* in *SystemInformationBlockType1* has not changed.

1> if the UE is CMAS capable:

2> upon entering a cell during RRC_IDLE, following successful handover or upon connection re-establishment:

3> discard any previously buffered *warningMessageSegment*;

3> clear, if any, stored values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType12* associated with the discarded *warningMessageSegment*;

2> when the UE acquires *SystemInformationBlockType1* following CMAS indication, upon entering a cell during RRC_IDLE, following successful handover and upon connection re-establishment:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType12* is present:

4> acquire *SystemInformationBlockType12*;

NOTE 3: UEs shall start acquiring *SystemInformationBlockType12* as described above even when *systemInfoValueTag* in *SystemInformationBlockType1* has not changed.

1> if the UE is interested to receive MBMS services:

2> if the UE is capable of MBMS reception as specified in 5.8:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType13* is present and the UE does not have stored a valid version of this system information block:

4> acquire SystemInformationBlockType13;

DAINGEAN_0001837

2> if the UE is capable of SC-PTM reception as specified in 5.8a:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType20* is present and the UE does not have stored a valid version of this system information block:

4> acquire *SystemInformationBlockType20*;

2> if the UE is capable of MBMS Service Continuity:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType15* is present and the UE does not have stored a valid version of this system information block:

4> acquire SystemInformationBlockType15;

1> if the UE is EAB capable:

2> when the UE does not have stored a valid version of *SystemInformationBlockType14* upon entering RRC_IDLE, or when the UE acquires *SystemInformationBlockType1* following EAB parameters change notification, or upon entering a cell during RRC_IDLE, or before establishing an RRC connection if using eDRX with DRX cycle longer than the modification period:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType14* is present:

4> start acquiring *SystemInformationBlockType14* immediately;

3> else:

4> discard *SystemInformationBlockType14*, if previously received;

NOTE 4: EAB capable UEs start acquiring *SystemInformationBlockType14* as described above even when *systemInfoValueTag* in *SystemInformationBlockType1* has not changed.

NOTE 5: EAB capable UEs maintain an up to date *SystemInformationBlockType14* in RRC_IDLE.

1> if the UE is capable of sidelink communication and is configured by upper layers to receive or transmit sidelink communication:

2> if the cell used for sidelink communication meets the S-criteria as defined in TS 36.304 [4]; and

2> if *schedulingInfoList* indicates that *SystemInformationBlockType18* is present and the UE does not have stored a valid version of this system information block:

3> acquire *SystemInformationBlockType18*;

1> if the UE is capable of sidelink discovery and is configured by upper layers to receive or transmit sidelink discovery announcements on the primary frequency:

2> if *schedulingInfoList* indicates that *SystemInformationBlockType19* is present and the UE does not have stored a valid version of this system information block:

3> acquire *SystemInformationBlockType19*;

2> for each of the one or more frequencies included in *discInterFreqList*, if included in *SystemInformationBlockType19* and for which the UE is configured by upper layers to receive sidelink discovery announcements on:

3> if *schedulingInfoList* indicates that *SystemInformationBlockType19* is present and the UE does not have stored a valid version of this system information block:

4> acquire *SystemInformationBlockType19*;

1> if the UE is a NB-IoT UE and if *ab-Enabled* included in *MasterInformationBlock-NB* is set to *TRUE*:

2> not initiate the RRC connection establishment/resume procedure until the UE has a valid version of *SystemInformationBlockType14-NB*;

DAINGEAN_0001838

The UE may apply the received SIBs immediately, i.e. the UE does not need to delay using a SIB until all SI messages have been received. The UE may delay applying the received SIBs until completing lower layer procedures associated with a received or a UE originated RRC message, e.g. an ongoing random access procedure.

NOTE 6: While attempting to acquire a particular SIB, if the UE detects from *schedulingInfoList* that it is no longer present, the UE should stop trying to acquire the particular SIB.

5.2.2.5 Essential system information missing

The UE shall:

1> if in RRC_IDLE or in RRC_CONNECTED while T311 is running:

2> if the UE is unable to acquire the *MasterInformationBlock*; or

2> if the UE is neither a BL UE nor in CE and the UE is unable to acquire the *SystemInformationBlockType1*; or

2> if the BL UE or UE in CE is unable to acquire *SystemInformationBlockType1-BR* or *SystemInformationBlockType1-BR* is not scheduled; or

2> if the NB-IoT UE is unable to acquire the *MasterInformationBlock-NB* or the *SystemInformationBlockType1-NB*:

3> consider the cell as barred in accordance with TS 36.304 [4]; and

3> perform barring as if *intraFreqReselection* is set to *allowed*, and as if the *csg-Indication* is set to *FALSE*;

2> else if the UE is unable to acquire the *SystemInformationBlockType2* (or *SystemInformationBlockType2-NB* in NB-IoT):

3> treat the cell as barred in accordance with TS 36.304 [4];

5.2.2.6 Actions upon reception of the *MasterInformationBlock* message

Upon receiving the *MasterInformationBlock* message the UE shall:

1> apply the radio resource configuration included in the *phich-Config*;

1> if the UE is in RRC_IDLE or if the UE is in RRC_CONNECTED while T311 is running:

2> if the UE has no valid system information stored according to 5.2.2.3 for the concerned cell:

3> apply the received value of *dl-Bandwidth* to the *ul-Bandwidth* until *SystemInformationBlockType2* is received;

Upon receiving the *MasterInformationBlock-NB* message the UE shall:

1> apply the radio resource configuration included in accordance with the *operationModeInfo*.

5.2.2.7 Actions upon reception of the *SystemInformationBlockType1* message

Upon receiving the *SystemInformationBlockType1* either via broadcast or via dedicated signalling, the UE shall:

1> if in RRC_IDLE or in RRC_CONNECTED while T311 is running; and

1> if the UE is a category 0 UE according to TS 36.306 [5]; and

1> if *category0Allowed* is not included in *SystemInformationBlockType1*:

2> consider the cell as barred in accordance with TS 36.304 [4];

1> if in RRC_CONNECTED while T311 is not running, and the UE supports multi-band cells as defined by bit 31 in *featureGroupIndicators*:

2> disregard the *freqBandIndicator* and *multiBandInfoList*, if received, while in RRC_CONNECTED;

DAINGEAN_0001839

2> forward the *cellIdentity* to upper layers;

2> forward the *trackingAreaCode* to upper layers;

1> else:

2> if the frequency band indicated in the *freqBandIndicator* is part of the frequency bands supported by the UE and it is not a downlink only band; or

2> if the UE supports *multiBandInfoList,* and if one or more of the frequency bands indicated in the *multiBandInfoList* are part of the frequency bands supported by the UE and they are not downlink only bands:

3> forward the *cellIdentity* to upper layers;

3> forward the *trackingAreaCode* to upper layers;

3> if, for the frequency band selected by the UE (from *freqBandIndicator* or *multiBandInfoList*), the *freqBandInfo* or the *multiBandInfoList-v10j0* is present and the UE capable of *multiNS-Pmax* supports at least one *additionalSpectrumEmission* in the *NS-PmaxList* within the *freqBandInfo* or *multiBandInfoList-v10j0*:

4> apply the first listed *additionalSpectrumEmission* which it supports among the values included in *NS-PmaxList* within *freqBandInfo* or *multiBandInfolist-v10j0*;

4> if the *additionalPmax* is present in the same entry of the selected *additionalSpectrumEmission* within *NS-PmaxList*:

5> apply the *additionalPmax*;

4> else:

5> apply the *p-Max*;

3> else:

4> apply the *additionalSpectrumEmission* in *SystemInformationBlockType2* and the *p-Max*;

2> else:

3> consider the cell as barred in accordance with TS 36.304 [4]; and

3> perform barring as if *intraFreqReselection* is set to *notAllowed*, and as if the *csg-Indication* is set to *FALSE*;

Upon receiving the *SystemInformationBlockType1-NB*, the UE shall:

1> if the frequency band indicated in the *freqBandIndicator* is part of the frequency bands supported by the UE and it is not a downlink only band; or

1> if one or more of the frequency bands indicated in the *multiBandInfoList* are part of the frequency bands supported by the UE and they are not downlink only bands:

2> forward the *cellIdentity* to upper layers;

2> forward the *trackingAreaCode* to upper layers;

2> forward the a*ttachWithoutPDN-Connectivity* to upper layers, if received for the selected PLMN;

2> if, for the frequency band selected by the UE (from *freqBandIndicator* or *multiBandInfoList*), the *freqBandInfo* is present and the UE capable of *multiNS-Pmax* supports at least one *additionalSpectrumEmission* in the *NS-PmaxList* within the *freqBandInfo*:

3> apply the first listed *additionalSpectrumEmission* which it supports among the values included in *NS-PmaxList* within *freqBandInfo*;

DAINGEAN_0001840

3> if the *additionalPmax* is present in the same entry of the selected *additionalSpectrumEmission* within *NS-PmaxList*:

4> apply the *additionalPmax*;

3> else:

4> apply the *p-Max*;

2> else:

3> apply the *additionalSpectrumEmission* in *SystemInformationBlockType2-NB* and the *p-Max*;

1> else:

2> consider the cell as barred in accordance with TS 36.304 [4]; and

2> perform barring as if *intraFreqReselection* is set to *notAllowed*.

5.2.2.8 Actions upon reception of *SystemInformation* messages

No UE requirements related to the contents of the *SystemInformation* messages apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.9 Actions upon reception of *SystemInformationBlockType2*

Upon receiving *SystemInformationBlockType2*, the UE shall:

1> apply the configuration included in the *radioResourceConfigCommon*;

1> if upper layers indicate that a (UE specific) paging cycle is configured:

2> apply the shortest of the (UE specific) paging cycle and the *defaultPagingCycle* included in the *radioResourceConfigCommon*;

1> if the *mbsfn-SubframeConfigList* is included:

2> consider that DL assignments may occur in the MBSFN subframes indicated in the *mbsfn-SubframeConfigList* under the conditions specified in [23, 7.1];

1> apply the specified PCCH configuration defined in 9.1.1.3;

1> not apply the *timeAlignmentTimerCommon*;

1> if in RRC_CONNECTED and UE is configured with RLF timers and constants values received within *rlf-TimersAndConstants*:

2> not update its values of the timers and constants in *ue-TimersAndConstants* except for the value of timer T300;

1> if in RRC_CONNECTED while T311 is not running; and the UE supports multi-band cells as defined by bit 31 in *featureGroupIndicators* or *multipleNS-Pmax*:

2> disregard the *additionalSpectrumEmission* and *ul-CarrierFreq*, if received, while in RRC_CONNECTED;

1> forward a*ttachWithoutPDN-Connectivity* to upper layers, if received for the selected PLMN;

1> forward *cp-CIoT-EPS-Optimisation* to upper layers, if received for the selected PLMN:

1> forward *up-CIoT-EPS-Optimisation* to upper layers, if received for the selected PLMN:Upon receiving *SystemInformationBlockType2-NB*, the UE shall:

1> apply the configuration included in the *radioResourceConfigCommon*;

1> apply the *defaultPagingCycle* included in the *radioResourceConfigCommon*;

DAINGEAN_0001841

1> apply the specified PCCH configuration defined in 9.1.1.3.

5.2.2.10 Actions upon reception of *SystemInformationBlockType3*

Upon receiving *SystemInformationBlockType3*, the UE shall:

1> if in RRC_IDLE, the *redistributionServingInfo* is included and the UE is redistribution capable:

2> perform E-UTRAN inter-frequency redistribution procedure as specified in TS 36.304 [4, 5.2.4.10];

No UE requirements related to the contents of *SystemInformationBlockType3-NB* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.11 Actions upon reception of *SystemInformationBlockType4*

No UE requirements related to the contents of this *SystemInformationBlock (SystemInformationBlockType4* or *SystemInformationBlockType4-NB)* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.12 Actions upon reception of *SystemInformationBlockType5*

Upon receiving *SystemInformationBlockType5*, the UE shall:

1> if in RRC_IDLE, the *redistributionInterFreqInfo* is included and the UE is redistribution capable:

2> perform E-UTRAN inter-frequency redistribution procedure as specified in TS 36.304 [4, 5.2.4.10];

No UE requirements related to the contents of *SystemInformationBlockType5-NB* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.13 Actions upon reception of *SystemInformationBlockType6*

No UE requirements related to the contents of this *SystemInformationBlock* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.14 Actions upon reception of *SystemInformationBlockType7*

No UE requirements related to the contents of this *SystemInformationBlock* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.15 Actions upon reception of *SystemInformationBlockType8*

Upon receiving *SystemInformationBlockType8*, the UE shall:

1> if *sib8-PerPLMN-List* is included and the UE is capable of network sharing for CDMA2000:

2> apply the CDMA2000 parameters below corresponding to the RPLMN;

1> if the *systemTimeInfo* is included:

2> forward the *systemTimeInfo* to CDMA2000 upper layers;

1> if the UE is in RRC_IDLE and if *searchWindowSize* is included:

2> forward the *searchWindowSize* to CDMA2000 upper layers;

1> if *parametersHRPD* is included:

2> forward the *preRegistrationInfoHRPD* to CDMA2000 upper layers only if the UE has not received the *preRegistrationInfoHRPD* within an *RRCConnectionReconfiguration* message after entering this cell;

DAINGEAN_0001842

2> if the *cellReselectionParametersHRPD* is included:

3> forward the *neighCellList* to the CDMA2000 upper layers;

1> if the *parameters1XRTT* is included:

2> if the *csfb-RegistrationParam1XRTT* is included:

3> forward the *csfb-RegistrationParam1XRTT* to the CDMA2000 upper layers which will use this information to determine if a CS registration/re-registration towards CDMA2000 1xRTT in the EUTRA cell is required;

2> else:

3> indicate to CDMA2000 upper layers that CSFB Registration to CDMA2000 1xRTT is not allowed;

2> if the *longCodeState1XRTT* is included:

3> forward the *longCodeState1XRTT* to CDMA2000 upper layers;

2> if the *cellReselectionParameters1XRTT* is included:

3> forward the *neighCellList* to the CDMA2000 upper layers;

2> if the *csfb-SupportForDualRxUEs* is included:

3> forward *csfb-SupportForDualRxUEs* to the CDMA2000 upper layers;

2> else:

3> forward *csfb-SupportForDualRxUEs*, with its value set to *FALSE*, to the CDMA2000 upper layers;

2> if *ac-BarringConfig1XRTT* is included:

3> forward *ac-BarringConfig1XRTT* to the CDMA2000 upper layers;

2> if the *csfb-DualRxTxSupport* is included:

3> forward *csfb-DualRxTxSupport* to the CDMA2000 upper layers;

2> else:

3> forward *csfb-DualRxTxSupport*, with its value set to *FALSE*, to the CDMA2000 upper layers;

5.2.2.16 Actions upon reception of *SystemInformationBlockType9*

Upon receiving *SystemInformationBlockType9*, the UE shall:

1> if *hnb-Name* is included, forward the *hnb-Name* to upper layers;

5.2.2.17 Actions upon reception of *SystemInformationBlockType10*

Upon receiving *SystemInformationBlockType10*, the UE shall:

1> forward the received *warningType*, *messageIdentifier* and *serialNumber* to upper layers;

5.2.2.18 Actions upon reception of *SystemInformationBlockType11*

Upon receiving *SystemInformationBlockType11*, the UE shall:

1> if there is no current value for *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*; or

1> if either the received value of *messageIdentifier* or of *serialNumber* or of both are different from the current values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*:

2> use the received values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11* as the current values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*;

DAINGEAN_0001843

2> discard any previously buffered *warningMessageSegment*;

2> if all segments of a warning message have been received:

3> assemble the warning message from the received *warningMessageSegment*;

3> forward the received warning message, *messageIdentifier*, *serialNumber* and *dataCodingScheme* to upper layers;

3> stop reception of *SystemInformationBlockType11*;

3> discard the current values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*;

2> else:

3> store the received *warningMessageSegment*;

3> continue reception of *SystemInformationBlockType11*;

1> else if all segments of a warning message have been received:

2> assemble the warning message from the received *warningMessageSegment*;

2> forward the received complete warning message, *messageIdentifier*, *serialNumber* and *dataCodingScheme* to upper layers;

2> stop reception of *SystemInformationBlockType11*;

2> discard the current values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11*;

1> else:

2> store the received *warningMessageSegment*;

2> continue reception of *SystemInformationBlockType11*;

The UE should discard any stored *warningMessageSegment* and the current value of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType11* if the complete warning message has not been assembled within a period of 3 hours.

5.2.2.19 Actions upon reception of *SystemInformationBlockType12*

Upon receiving *SystemInformationBlockType12*, the UE shall:

1> if the *SystemInformationBlockType12* contains a complete warning message:

2> forward the received warning message, *messageIdentifier*, *serialNumber* and *dataCodingScheme* to upper layers;

2> continue reception of *SystemInformationBlockType12*;

1> else:

2> if the received values of *messageIdentifier* and *serialNumber* are the same (each value is the same) as a pair for which a warning message is currently being assembled:

3> store the received *warningMessageSegment*;

3> if all segments of a warning message have been received:

4> assemble the warning message from the received *warningMessageSegment*;

4> forward the received warning message, *messageIdentifier*, *serialNumber* and *dataCodingScheme* to upper layers;

4> stop assembling a warning message for this *messageIdentifier* and *serialNumber* and delete all stored information held for it;

DAINGEAN_0001844

3> continue reception of *SystemInformationBlockType12*;

2> else if the received values of *messageIdentifier* and/or *serialNumber* are not the same as any of the pairs for which a warning message is currently being assembled:

3> start assembling a warning message for this *messageIdentifier* and *serialNumber* pair;

3> store the received *warningMessageSegment*;

3> continue reception of *SystemInformationBlockType12*;

The UE should discard *warningMessageSegment* and the associated values of *messageIdentifier* and *serialNumber* for *SystemInformationBlockType12* if the complete warning message has not been assembled within a period of 3 hours.

NOTE: The number of warning messages that a UE can re-assemble simultaneously is a function of UE implementation.

5.2.2.20 Actions upon reception of *SystemInformationBlockType13*

No UE requirements related to the contents of this *SystemInformationBlock* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.21 Actions upon reception of *SystemInformationBlockType14*

No UE requirements related to the contents of this *SystemInformationBlock* (*SystemInformationBlockType14* or *SystemInformationBlockType14-NB*) apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.22 Actions upon reception of *SystemInformationBlockType15*

No UE requirements related to the contents of this *SystemInformationBlock* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.23 Actions upon reception of *SystemInformationBlockType16*

No UE requirements related to the contents of this *SystemInformationBlock* (*SystemInformationBlockType16* or *SystemInformationBlockType16-NB*) apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.2.24 Actions upon reception of *SystemInformationBlockType17*

Upon receiving *SystemInformationBlockType17*, the UE shall:

1> if *wlan-OffloadConfigCommon* corresponding to the RPLMN is included:

2> if the UE is not configured with *rclwi-Configuration* with *command* set to *steerToWLAN*:

3> apply the *wlan-Id-List* corresponding to the RPLMN;

2> if not configured with the *wlan-OffloadConfigDedicated*:

3> apply the *wlan-OffloadConfigCommon* corresponding to the RPLMN;

5.2.2.25 Actions upon reception of *SystemInformationBlockType18*

Upon receiving *SystemInformationBlockType18*, the UE shall:

1> if *SystemInformationBlockType18* message includes the *commConfig*:

2> if configured to receive sidelink communication:

3> from the next SC period, as defined by *sc-Period*, use the resource pool indicated by *commRxPool* for sidelink communication monitoring, as specified in 5.10.3;

DAINGEAN_0001845

2> if configured to transmit sidelink communication:

3> from the next SC period, as defined by *sc-Period*, use the resource pool indicated by *commTxPoolNormalCommon*, *commTxPoolNormalCommonExt* or by *commTxPoolExceptional* for sidelink communication transmission, as specified in 5.10.4;

5.2.2.26 Actions upon reception of *SystemInformationBlockType19*

Upon receiving *SystemInformationBlockType19*, the UE shall:

1> if *SystemInformationBlockType19* message includes the *discConfig* or *discConfigPS*:

2> from the next discovery period, as defined by *discPeriod*, use the resources indicated by *discRxPool*, *discRxResourcesInterFreq* or *discRxPoolPS* for sidelink discovery monitoring, as specified in 5.10.5;

2> if *SystemInformationBlockType19* message includes the *discTxPoolCommon* or *discTxPoolPS-Common*; and the UE is in RRC_IDLE:

3> from the next discovery period, as defined by *discPeriod*, use the resources indicated by *discTxPoolCommon* or *discTxPoolPS-Common* for sidelink discovery announcement, as specified in 5.10.6;

2> if the *SystemInformationBlockType19* message includes the *discTxPowerInfo*:

3> use the power information included in *discTxPowerInfo* for sidelink discovery transmission on the serving frequency, as specified in TS 36.213 [23];

1> if *SystemInformationBlockType19* message includes the *discConfigRelay*:

2> if the *SystemInformationBlockType19* message includes the *txPowerInfo*:

3> use the power information included in *txPowerInfo* for sidelink discovery transmission on the corresponding non-serving frequency, as specified in TS 36.213 [23];

5.2.2.27 Actions upon reception of *SystemInformationBlockType20*

No UE requirements related to the contents of this *SystemInformationBlock* apply other than those specified elsewhere e.g. within procedures using the concerned system information, and/ or within the corresponding field descriptions.

5.2.3 Acquisition of an SI message

When acquiring an SI message, the UE shall:

1> determine the start of the SI-window for the concerned SI message as follows:

2> for the concerned SI message, determine the number n which corresponds to the order of entry in the list of SI messages configured by *schedulingInfoList* in *SystemInformationBlockType1*;

2> determine the integer value $x = (n - 1)*w$, where w is the *si-WindowLength*;

2> the SI-window starts at the subframe #a, where $a = x$ mod 10, in the radio frame for which SFN mod T = FLOOR(x/10), where T is the *si-Periodicity* of the concerned SI message;

NOTE: E-UTRAN should configure an SI-window of 1 ms only if all SIs are scheduled before subframe #5 in radio frames for which SFN mod 2 = 0.

1> receive DL-SCH using the SI-RNTI from the start of the SI-window and continue until the end of the SI-window whose absolute length in time is given by *si-WindowLength*, or until the SI message was received, excluding the following subframes:

2> subframe #5 in radio frames for which SFN mod 2 = 0;

2> any MBSFN subframes;

2> any uplink subframes in TDD;

DAINGEAN_0001846

1> if the SI message was not received by the end of the SI-window, repeat reception at the next SI-window occasion for the concerned SI message;

5.2.3a Acquisition of an SI message by BL UE or UE in CE or a NB-IoT UE

When acquiring an SI message, the BL UE or UE in CE or NB-IoT UE shall:

1> determine the start of the SI-window for the concerned SI message as follows:

2> for the concerned SI message, determine the number n which corresponds to the order of entry in the list of SI messages configured by *schedulingInfoList* in *SystemInformationBlockType1-BR* (or *SystemInformationBlockType1-NB* in NB-IoT);

2> determine the integer value $x = (n - 1)*w$, where w is the *si-WindowLength-BR* (or *si-WindowLength* in NB-IoT);

2> if the UE is a NB-IoT UE:

3> the SI-window starts at the subframe #0 in the radio frame for which (H-SFN * 1024 + SFN) mod T = FLOOR(x/10) + Offset, where T is the *si-Periodicity* of the concerned SI message and, Offset is the offset of the start of the SI-Window (*si-RadioFrameOffset*);

2> else:

3> the SI-window starts at the subframe #0 in the radio frame for which SFN mod T = FLOOR(x/10), where T is the *si-Periodicity* of the concerned SI message;

1> if the UE is a NB-IoT UE:

2> receive and accumulate SI message transmissions on DL-SCH from the start of the SI-window and continue until the end of the SI-window whose absolute length in time is given by *si-WindowLength,* starting from the radio frames as provided in *si-RepetitionPattern* and in subframes as provided in *downlinkBitmap*, or until successful decoding of the accumulated SI message transmissions excluding the subframes used for transmission of NPSS, NSSS, *MasterInformationBlock-NB* and *SystemInformationBlockType1-NB*. If there are not enough subframes for one SI message transmission in the radio frames as provided in *si-RepetitionPattern*, the UE shall continue to receive the SI message transmission in the radio frames following the radio frame indicated in *si-RepetitionPattern*;

1> else:

2> receive and accumulate SI message transmissions on DL-SCH on narrowband provided by *si-Narrowband*, from the start of the SI-window and continue until the end of the SI-window whose absolute length in time is given by *si-WindowLength-BR,* only in radio frames as provided in *si-RepetitionPattern* and subframes as provided in *fdd-DownlinkOrTddSubframeBitmapBR* in *bandwidthReducedAccessRelatedInfo*, or until successful decoding of the accumulated SI message transmissions;

1> if the SI message was not possible to decode from the accumulated SI message transmissions by the end of the SI-window, continue reception and accumulation of SI message transmissions on DL-SCH in the next SI-window occasion for the concerned SI message;

5.3 Connection control

5.3.1 Introduction

5.3.1.1 RRC connection control

RRC connection establishment involves the establishment of SRB1. E-UTRAN completes RRC connection establishment prior to completing the establishment of the S1 connection, i.e. prior to receiving the UE context information from the EPC. Consequently, AS security is not activated during the initial phase of the RRC connection. During this initial phase of the RRC connection, the E-UTRAN may configure the UE to perform measurement reporting, but the UE only sends the corresponding measurement reports after successful security activation. However, the UE only accepts a handover message when security has been activated.

DAINGEAN_0001847

NOTE: In case the serving frequency broadcasts multiple overlapping bands, E-UTRAN can only configure measurements after having obtained the UE capabilities, as the measurement configuration needs to be set according to the band selected by the UE.

Upon receiving the UE context from the EPC, E-UTRAN activates security (both ciphering and integrity protection) using the initial security activation procedure. The RRC messages to activate security (command and successful response) are integrity protected, while ciphering is started only after completion of the procedure. That is, the response to the message used to activate security is not ciphered, while the subsequent messages (e.g. used to establish SRB2 and DRBs) are both integrity protected and ciphered.

After having initiated the initial security activation procedure, E-UTRAN initiates the establishment of SRB2 and DRBs, i.e. E-UTRAN may do this prior to receiving the confirmation of the initial security activation from the UE. In any case, E-UTRAN will apply both ciphering and integrity protection for the RRC connection reconfiguration messages used to establish SRB2 and DRBs. E-UTRAN should release the RRC connection if the initial security activation and/ or the radio bearer establishment fails (i.e. security activation and DRB establishment are triggered by a joint S1-procedure, which does not support partial success).

For SRB2 and DRBs, security is always activated from the start, i.e. the E-UTRAN does not establish these bearers prior to activating security.

For some radio configuration fields, a critical extension has been defined. A switch from the original version of the field to the critically extended version is allowed using any connection reconfiguration. The UE reverts to the original version of some critically extended fields upon handover and re-establishment as specified elsewhere in this specification. Otherwise, switching a field from the critically extended version to the original version is only possible using the handover or re-establishment procedure with the full configuration option. This also applies for fields that are critically extended within a release (i.e. original and extended version defined in same release).

After having initiated the initial security activation procedure, E-UTRAN may configure a UE that supports CA, with one or more SCells in addition to the PCell that was initially configured during connection establishment. The PCell is used to provide the security inputs and upper layer system information (i.e. the NAS mobility information e.g. TAI). SCells are used to provide additional downlink and optionally uplink radio resources. When not configured with DC all SCells the UE is configured with, if any, are part of the MCG. When configured with DC however, some of the SCells are part of a SCG. In this case, user data carried by a DRB may either be transferred via MCG (i.e. MCG-DRB), via SCG (SCG-DRB) or via both MCG and SCG in DL while E-UTRAN configures the CG used in UL (split DRB). An RRC connection reconfiguration message may be used to change the DRB type from MCG-DRB to SCG-DRB or to split DRB, as well as from SCG-DRB or split DRB to MCG-DRB.

SCG change is a synchronous SCG reconfiguration procedure (i.e. involving RA to the PSCell) including reset/ re-establishment of layer 2 and, if SCG DRBs are configured, refresh of security. The procedure is used in a number of different scenarios e.g. SCG establishment, PSCell change, Key refresh, change of DRB type. The UE performs the SCG change related actions upon receiving an *RRCConnectionReconfiguration* message including *mobilityControlInfoSCG*, see 5.3.10.10.

The release of the RRC connection normally is initiated by E-UTRAN. The procedure may be used to re-direct the UE to an E-UTRA frequency or an inter-RAT carrier frequency. Only in exceptional cases, as specified within this specification, TS 36.300 [9], TS 36.304 [4] or TS 24.301 [35], may the UE abort the RRC connection, i.e. move to RRC_IDLE without notifying E-UTRAN.

The suspension of the RRC connection is initiated by E-UTRAN. When the RRC connection is suspended, the UE stores the UE AS context and the *resumeIdentity*, and transitions to RRC_IDLE state. The RRC message to suspend the RRC connection is integrity protected and ciphered. Suspension can only be performed when at least 1 DRB is successfully established.

The resumption of a suspended RRC connection is initiated by upper layers when the UE has a stored UE AS context, RRC connection resume is permitted by E-UTRAN and the UE needs to transit from RRC_IDLE state to RRC_CONNECTED state. When the RRC connection is resumed, RRC configures the UE according to the RRC connection resume procedure based on the stored UE AS context and any RRC configuration received from E-UTRAN. The RRC connection resume procedure re-activates security and re-establishes SRB(s) and DRB(s). The request to resume the RRC connection includes the *resumeIdentity*. The request is not ciphered, but protected with a message authentication code.

In response to a request to resume the RRC connection, E-UTRAN may resume the suspended RRC connection, reject the request to resume and instruct the UE to either keep or discard the stored context, or setup a new RRC connection.

DAINGEAN_0001848

5.3.1.2 Security

AS security comprises of the integrity protection of RRC signalling (SRBs) as well as the ciphering of RRC signalling (SRBs) and user data (DRBs).

RRC handles the configuration of the security parameters which are part of the AS configuration: the integrity protection algorithm, the ciphering algorithm and two parameters, namely the *keyChangeIndicator* and the *nextHopChainingCount,* which are used by the UE to determine the AS security keys upon handover, connection re-establishment and/ or connection resume.

The integrity protection algorithm is common for signalling radio bearers SRB1 and SRB2. The ciphering algorithm is common for all radio bearers (i.e. SRB1, SRB2 and DRBs). Neither integrity protection nor ciphering applies for SRB0.

RRC integrity and ciphering are always activated together, i.e. in one message/ procedure. RRC integrity and ciphering are never de-activated. However, it is possible to switch to a 'NULL' ciphering algorithm (eea0).

The 'NULL' integrity protection algorithm (eia0) is used only for the UE in limited service mode [32, TS33.401]. In case the 'NULL' integrity protection algorithm is used, 'NULL' ciphering algorithm is also used.

NOTE 1: Lower layers discard RRC messages for which the integrity check has failed and indicate the integrity verification check failure to RRC.

The AS applies three different security keys: one for the integrity protection of RRC signalling (K_{RRCint}), one for the ciphering of RRC signalling (K_{RRCenc}) and one for the ciphering of user data (K_{UPenc}). All three AS keys are derived from the K_{eNB} key. The K_{eNB} is based on the K_{ASME} key, which is handled by upper layers.

Upon connection establishment new AS keys are derived. No AS-parameters are exchanged to serve as inputs for the derivation of the new AS keys at connection establishment.

The integrity and ciphering of the RRC message used to perform handover is based on the security configuration used prior to the handover and is performed by the source eNB.

The integrity and ciphering algorithms can only be changed upon handover. The four AS keys (K_{eNB}, K_{RRCint}, K_{RRCenc} and K_{UPenc}) change upon every handover, connection re-establishment and connection resume. The *keyChangeIndicator* is used upon handover and indicates whether the UE should use the keys associated with the K_{ASME} key taken into use with the latest successful NAS SMC procedure. The *nextHopChainingCount* parameter is used upon handover, connection re-establishment and connection resume by the UE when deriving the new K_{eNB} that is used to generate K_{RRCint}, K_{RRCenc} and K_{UPenc} (see TS 33.401 [32]). An intra cell handover procedure may be used to change the keys in RRC_CONNECTED.

For each radio bearer an independent counter (COUNT, as specified in TS 36.323 [8]) is maintained for each direction. For each DRB, the COUNT is used as input for ciphering. For each SRB, the COUNT is used as input for both ciphering and integrity protection. It is not allowed to use the same COUNT value more than once for a given security key. At connection resume the COUNT is reset. In order to limit the signalling overhead, individual messages/ packets include a short sequence number (PDCP SN, as specified in TS 36.323 [8]). In addition, an overflow counter mechanism is used: the hyper frame number (TX_HFN and RX_HFN, as specified in TS 36.323 [8]). The HFN needs to be synchronized between the UE and the eNB. The eNB is responsible for avoiding reuse of the COUNT with the same RB identity and with the same K_{eNB}, e.g. due to the transfer of large volumes of data, release and establishment of new RBs. In order to avoid such re-use, the eNB may e.g. use different RB identities for successive RB establishments, trigger an intra cell handover or an RRC_CONNECTED to RRC_IDLE to RRC_CONNECTED transition.

For each SRB, the value provided by RRC to lower layers to derive the 5-bit BEARER parameter used as input for ciphering and for integrity protection is the value of the corresponding *srb-Identity* with the MSBs padded with zeroes.

In case of DC, a separate K_{eNB} is used for SCG-DRBs (S-K_{eNB}). This key is derived from the key used for the MCG (K_{eNB}) and an SCG counter that is used to ensure freshness. To refresh the S-K_{eNB} e.g. when the COUNT will wrap around, E-UTRAN employs an SCG change, i.e. an *RRCConnectionReconfiguration* message including *mobilityControlInfoSCG*. When performing handover, while at least one SCG-DRB remains configured, both K_{eNB} and S-K_{eNB} are refreshed. In such case E-UTRAN performs handover with SCG change i.e. an *RRCConnectionReconfiguration* message including both *mobilityControlInfo* and *mobilityControlInfoSCG*. The ciphering algorithm is common for all radio bearers within a CG but may be different between MCG and SCG. The ciphering algorithm for SCG DRBs can only be changed upon SCG change.

DAINGEAN_0001849

5.3.1.2a RN security

For RNs, AS security follows the procedures in 5.3.1.2. Furthermore, E-UTRAN may configure per DRB whether or not integrity protection is used. The use of integrity protection may be configured only upon DRB establishment and reconfigured only upon handover or upon the first reconfiguration following RRC connection re-establishment.

To provide integrity protection on DRBs between the RN and the E-UTRAN, the K_{UPint} key is derived from the K_{eNB} key as described in TS33.401 [32]. The same integrity protection algorithm used for SRBs also applies to the DRBs. The K_{UPint} changes at every handover and RRC connection re-establishment and is based on an updated K_{eNB} which is derived by taking into account the *nextHopChainingCount*. The COUNT value maintained for DRB ciphering is also used for integrity protection, if the integrity protection is configured for the DRB.

5.3.1.3 Connected mode mobility

In RRC_CONNECTED, the network controls UE mobility, i.e. the network decides when the UE shall connect to which E-UTRA cell(s), or inter-RAT cell. For network controlled mobility in RRC_CONNECTED, the PCell can be changed using an *RRCConnectionReconfiguration* message including the *mobilityControlInfo* (handover), whereas the SCell(s) can be changed using the *RRCConnectionReconfiguration* message either with or without the *mobilityControlInfo*.

An SCG can be established, reconfigured or released by using an *RRCConnectionReconfiguration* message with or without the *mobilityControlInfo*. In case Random Access to the PSCell is required upon SCG reconfiguration, E-UTRAN employs the SCG change procedure (i.e. an *RRCConnectionReconfiguration* message including the *mobilityControlInfoSCG*). The PSCell can only be changed using the SCG change procedure and by release and addition of the PSCell.

The network triggers the handover procedure e.g. based on radio conditions, load. To facilitate this, the network may configure the UE to perform measurement reporting (possibly including the configuration of measurement gaps). The network may also initiate handover blindly, i.e. without having received measurement reports from the UE.

Before sending the handover message to the UE, the source eNB prepares one or more target cells. The source eNB selects the target PCell. The source eNB may also provide the target eNB with a list of best cells on each frequency for which measurement information is available, in order of decreasing RSRP. The source eNB may also include available measurement information for the cells provided in the list. The target eNB decides which SCells are configured for use after handover, which may include cells other than the ones indicated by the source eNB. If an SCG is configured, handover involves either SCG release or SCG change. In case the UE was configured with DC, the target eNB indicates in the handover message whether the UE shall release the entire SCG configuration. Upon connection re-establishment, the UE releases the entire SCG configuration except for the DRB configuration, while E-UTRAN in the first reconfiguration message following the re-establishment either releases the DRB(s) or reconfigures the DRB(s) to MCG DRB(s).

The target eNB generates the message used to perform the handover, i.e. the message including the AS-configuration to be used in the target cell(s). The source eNB transparently (i.e. does not alter values/ content) forwards the handover message/ information received from the target to the UE. When appropriate, the source eNB may initiate data forwarding for (a subset of) the DRBs.

After receiving the handover message, the UE attempts to access the target PCell at the first available RACH occasion according to Random Access resource selection defined in TS 36.321 [6], i.e. the handover is asynchronous. Consequently, when allocating a dedicated preamble for the random access in the target PCell, E-UTRA shall ensure it is available from the first RACH occasion the UE may use. Upon successful completion of the handover, the UE sends a message used to confirm the handover.

If the target eNB does not support the release of RRC protocol which the source eNB used to configure the UE, the target eNB may be unable to comprehend the UE configuration provided by the source eNB. In this case, the target eNB should use the full configuration option to reconfigure the UE for Handover and Re-establishment. Full configuration option includes an initialization of the radio configuration, which makes the procedure independent of the configuration used in the source cell(s) with the exception that the security algorithms are continued for the RRC re-establishment.

After the successful completion of handover, PDCP SDUs may be re-transmitted in the target cell(s). This only applies for DRBs using RLC-AM mode and for handovers not involving full configuration option. The further details are specified in TS 36.323 [8]. After the successful completion of handover not involving full configuration option, the SN and the HFN are reset except for the DRBs using RLC-AM mode (for which both SN and HFN continue). For

DAINGEAN_0001850

reconfigurations involving the full configuration option, the PDCP entities are newly established (SN and HFN do not continue) for all DRBs irrespective of the RLC mode. The further details are specified in TS 36.323 [8].

One UE behaviour to be performed upon handover is specified, i.e. this is regardless of the handover procedures used within the network (e.g. whether the handover includes X2 or S1 signalling procedures).

The source eNB should, for some time, maintain a context to enable the UE to return in case of handover failure. After having detected handover failure, the UE attempts to resume the RRC connection either in the source PCell or in another cell using the RRC re-establishment procedure. This connection resumption succeeds only if the accessed cell is prepared, i.e. concerns a cell of the source eNB or of another eNB towards which handover preparation has been performed. The cell in which the re-establishment procedure succeeds becomes the PCell while SCells and STAGs, if configured, are released.

Normal measurement and mobility procedures are used to support handover to cells broadcasting a CSG identity. In addition, E-UTRAN may configure the UE to report that it is entering or leaving the proximity of cell(s) included in its CSG whitelist. Furthermore, E-UTRAN may request the UE to provide additional information broadcast by the handover candidate cell e.g. global cell identity, CSG identity, CSG membership status.

NOTE: E-UTRAN may use the 'proximity report' to configure measurements as well as to decide whether or not to request additional information broadcast by the handover candidate cell. The additional information is used to verify whether or not the UE is authorised to access the target PCell and may also be needed to identify handover candidate cell (*PCI confusion* i.e. when the physical layer identity that is included in the measurement report does not uniquely identify the cell).

5.3.1.4 Connection control in NB-IoT

In NB-IoT, during the the RRC connection establishment procedure, SRB1bis is established implicitly with SRB1. SRB1bis uses the logical channel identity defined in 9.1.2a, with the same configuration as SRB1 but no PDCP entity. SRB1bis is used until security is activated. The RRC messages to activate security (command and successful response) are sent over SRB1 being integrity protected and ciphering is started after completion of the procedure. Once security is activated, new RRC messages shall be transmitted using SRB1. A NB-IoT UE that only supports the Control Plane CIoT EPS optimisation (see TS 24.301 [35]) only establishes SRB1bis.

A NB-IoT UE only supports 0, 1 or 2 DRBs, depending on its capability. A NB-IoT UE that only supports the Control Plane CIoT EPS optimisation ([24.301]) does not need to support any DRBs and associated procedures.

Table 5.3.1.4-1 lists the procedures that are applicable for NB-IoT. All other procedures are not applicable; this is not further stated in the corresponding procedures.

Table 5.3.1.4-1: Connection control procedures applicable to a NB-IoT UE

Sub-clause	Procedures
5.3.2	Paging
5.3.3	RRC connection establishment
	RRC connection resume (see NOTE)
5.3.4	Initial security activation (see NOTE)
5.3.5	RRC connection reconfiguration (see NOTE)
5.3.7	RRC connection re-establishment (see NOTE)
5.3.8	RRC connection release
5.3.9	RRC connection release requested by upper layers
5.3.10	Radio resource configuration
5.3.11	Radio link failure related actions
5.3.12	UE actions upon leaving RRC_CONNECTED

NOTE: Not applicable for a UE that only supports the Control Plane CIoT EPS optimisation (see TS 24.301 [35]).

DAINGEAN_0001851

5.3.2 Paging

5.3.2.1 General

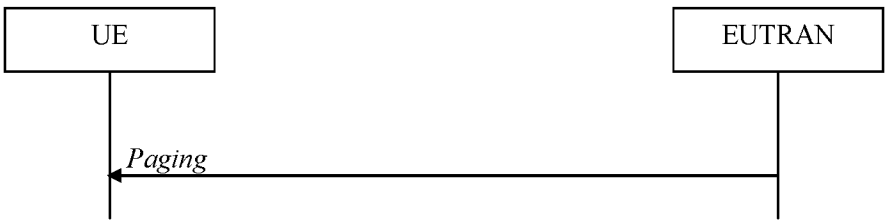


Figure 5.3.2.1-1: Paging

The purpose of this procedure is:

- to transmit paging information to a UE in RRC_IDLE and/ or;
- to inform UEs in RRC_IDLE and UEs other than NB-IoT UEs in RRC_CONNECTED about a system information change and/ or;
- to inform UEs other than NB-IoT UEs about an ETWS primary notification and/ or ETWS secondary notification and/ or;
- to inform UEs other than NB-IoT UEs about a CMAS notification and/ or;
- to inform UEs other than NB-IoT UEs in RRC_IDLE about an EAB parameters modification and/ or;
- to inform UEs other than NB-IoT UEs in RRC_IDLE to perform E-UTRAN inter-frequency redistribution procedure.

The paging information is provided to upper layers, which in response may initiate RRC connection establishment, e.g. to receive an incoming call.

5.3.2.2 Initiation

E-UTRAN initiates the paging procedure by transmitting the *Paging* message at the UE's paging occasion as specified in TS 36.304 [4]. E-UTRAN may address multiple UEs within a *Paging* message by including one *PagingRecord* for each UE. E-UTRAN may also indicate a change of system information, and/ or provide an ETWS notification or a CMAS notification in the *Paging* message.

5.3.2.3 Reception of the *Paging* message by the UE

Upon receiving the *Paging* message, the UE shall:

1> if in RRC_IDLE, for each of the *PagingRecord*, if any, included in the *Paging* message:

2> if the *ue-Identity* included in the *PagingRecord* matches one of the UE identities allocated by upper layers:

3> forward the *ue-Identity* and, except for NB-IoT, the *cn-Domain* to the upper layers;

1> if the *systemInfoModification* is included; or

1> if the UE is configured with a DRX cycle longer than the modification period and the *systemInfoModification-eDRX* is included:

2> re-acquire the required system information using the system information acquisition procedure as specified in 5.2.2.

1> if the *etws-Indication* is included and the UE is ETWS capable:

2> re-acquire *SystemInformationBlockType1* immediately, i.e., without waiting until the next system information modification period boundary;

DAINGEAN_0001852

2> if the *schedulingInfoList* indicates that *SystemInformationBlockType10* is present:

3> acquire *SystemInformationBlockType10*;

NOTE: If the UE is in CE, it is up to UE implementation when to start acquiring *SystemInformationBlockType10*.

2> if the *schedulingInfoList* indicates that *SystemInformationBlockType11* is present:

3> acquire *SystemInformationBlockType11*;

1> if the *cmas-Indication* is included and the UE is CMAS capable:

2> re-acquire *SystemInformationBlockType1* immediately, i.e., without waiting until the next system information modification period boundary as specified in 5.2.1.5;

2> if the *schedulingInfoList* indicates that *SystemInformationBlockType12* is present:

3> acquire *SystemInformationBlockType12*;

1> if in RRC_IDLE, the *eab-ParamModification* is included and the UE is EAB capable:

2> consider previously stored SystemInformationBlockType14 as invalid;

2> re-acquire *SystemInformationBlockType1* immediately, i.e., without waiting until the next system information modification period boundary as specified in 5.2.1.6;

2> re-acquire *SystemInformationBlockType14* using the system information acquisition procedure as specified in 5.2.2.4;

1> if in RRC_IDLE, the *redistributionIndication* is included and the UE is redistribution capable:

2> Perform E-UTRAN inter-frequency redistribution procedure as specified in TS 36.304 (5.2.4.10, [4]);

5.3.3 RRC connection establishment

5.3.3.1 General

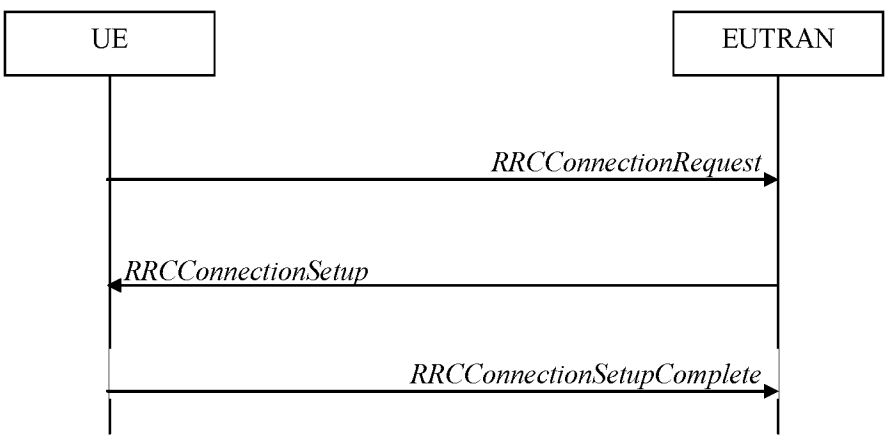


Figure 5.3.3.1-1: RRC connection establishment, successful

DAINGEAN_0001853

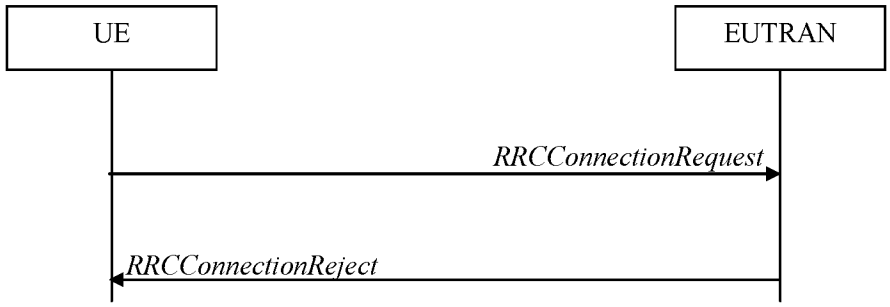


Figure 5.3.3.1-2: RRC connection establishment, network reject

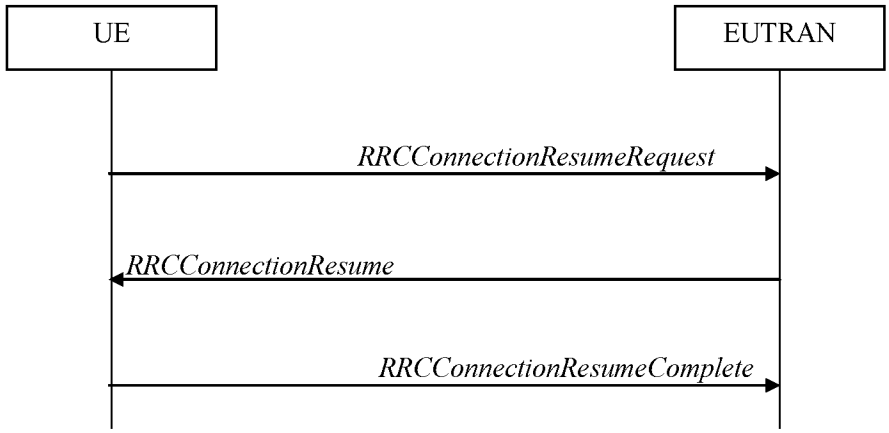


Figure 5.3.3.1-3: RRC connection resume, successful

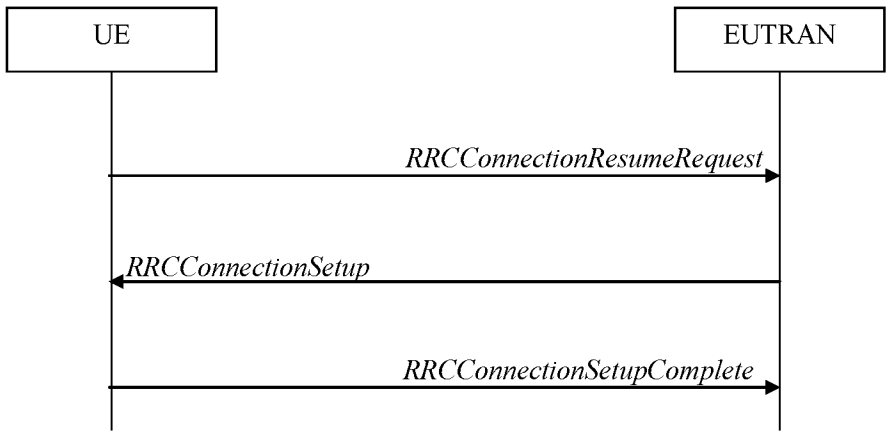


Figure 5.3.3.1-4: RRC connection resume fallback to RRC connection establishment, successful

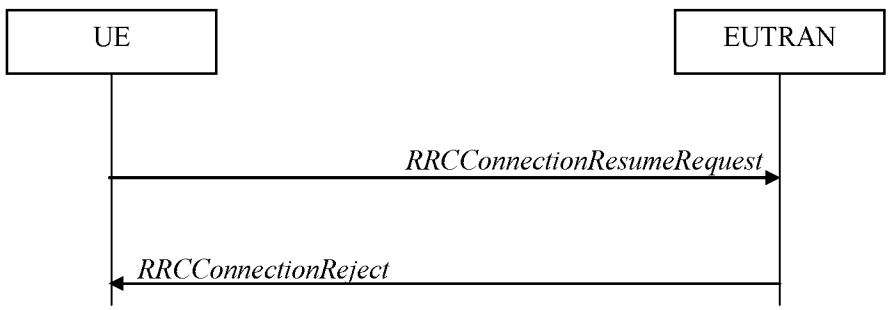


Figure 5.3.3.1-5: RRC connection resume, network reject or release

DAINGEAN_0001854

The purpose of this procedure is to establish or resume an RRC connection. RRC connection establishment involves SRB1 establishment. The procedure is also used to transfer the initial NAS dedicated information/ message from the UE to E-UTRAN.

E-UTRAN applies the procedure as follows:

- When establishing an RRC connection:
  - to establish SRB1 and, for NB-IoT, SRB1bis;
- When resuming an RRC connection:
  - to restore the AS configuration from a stored context including resuming SRB(s) and DRB(s).

5.3.3.1a Conditions for establishing RRC Connection for sidelink communication/ discovery

For sidelink communication an RRC connection is initiated only in the following case:

1> if configured by upper layers to transmit non-relay related sidelink communication and related data is available for transmission:

2> if *SystemInformationBlockType18* is broadcast by the cell on which the UE camps; and if the valid version of *SystemInformationBlockType18* does not include *commTxPoolNormalCommon*;

1> if configured by upper layers to transmit relay related sidelink communication:

2> if the UE is acting as sidelink relay UE; and if *SystemInformationBlockType18* is broadcast by the cell on which the UE camps; or

2> if the UE has a selected sidelink relay UE; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met and if *SystemInformationBlockType18* is broadcast by the cell on which the UE camps; and if the valid version of *SystemInformationBlockType18* does not include *commTxPoolNormalCommon* or *commTxAllowRelayCommon*;

For sidelink discovery an RRC connection is initiated only in the following case:

1> if configured by upper layers to transmit non-PS related sidelink discovery announcements:

2> if the frequency on which the UE is configured to transmit non-PS related sidelink discovery announcements concerns the camped frequency; and *SystemInformationBlockType19* of the cell on which the UE camps does not include *discTxPoolCommon-r12*; or

2> if the frequency on which the UE is configured to transmit non-PS related sidelink discovery announcements is included in *discInterFreqList* in *SystemInformationBlockType19* broadcast by the cell on which the UE camps, with *discTxResourcesInterFreq* included within *discResourcesNonPS* and set to *requestDedicated*;

1> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements:

2> if the frequency on which the UE is configured to transmit non-relay PS related sidelink discovery announcements concerns the camped frequency; and *SystemInformationBlockType19* of the cell on which the UE camps includes *discConfigPS* but does not include *discTxPoolPS-Common*; or

2> if the frequency on which the UE is configured to transmit non-relay PS related sidelink discovery announcements (e.g. group member discovery) is included in *discInterFreqList* in *SystemInformationBlockType19* broadcast by the cell on which the UE camps, with *discTxResourcesInterFreq* within *discResourcesPS* included and set to *requestDedicated*;

1> if configured by upper layers to transmit relay PS related sidelink discovery announcements:

2> if the UE is acting as sidelink relay UE; and if the sidelink relay UE threshold conditions as specified in 5.10.10.4 are met; or

2> if the UE is selecting a sidelink relay UE / has a selected sidelink relay UE; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met:

DAINGEAN_0001855

3> if the frequency on which the UE is configured to transmit relay PS related sidelink discovery announcements concerns the camped frequency; and *SystemInformationBlockType19* of the cell on which the UE camps includes *discConfigRelay* and *discConfigPS* but does not include *discTxPoolPS-Common*;

NOTE: Upper layers initiate an RRC connection. The interaction with NAS is left to UE implementation.

5.3.3.2 Initiation

The UE initiates the procedure when upper layers request establishment or resume of an RRC connection while the UE is in RRC_IDLE.

Except for NB-IoT, upon initiation of the procedure, the UE shall:

1> if *SystemInformationBlockType2* includes *ac-BarringPerPLMN-List* and the *ac-BarringPerPLMN-List* contains an *AC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]):

2> select the *AC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers;

2> in the remainder of this procedure, use the selected *AC-BarringPerPLMN* entry (i.e. presence or absence of access barring parameters in this entry) irrespective of the common access barring parameters included in *SystemInformationBlockType2;*

1> else

2> in the remainder of this procedure use the common access barring parameters (i.e. presence or absence of these parameters) included in *SystemInformationBlockType2;*

1> if *SystemInformationBlockType2* contains *ACDC-BarringPerPLMN-List* and the *ACDC-BarringPerPLMN-List* contains an *ACDC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]):

2> select the *ACDC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers;

2> in the remainder of this procedure, use the selected *ACDC-BarringPerPLMN* entry for ACDC barring check (i.e. presence or absence of access barring parameters in this entry) irrespective of the *ACDC-BarringForCommon* parameters included in *SystemInformationBlockType2*;

1> else:

2> in the remainder of this procedure use the *ACDC-BarringForCommon* (i.e. presence or absence of these parameters) included in *SystemInformationBlockType2* for ACDC barring check;

1> if upper layers indicate that the RRC connection is subject to EAB (see TS 24.301 [35]):

2> if the result of the EAB check, as specified in 5.3.3.12, is that access to the cell is barred:

3> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that EAB is applicable, upon which the procedure ends;

1> if upper layers indicate that the RRC connection is subject to ACDC (see TS 24.301 [35]), *SystemInformationBlockType2* contains *BarringPerACDC-CategoryList*, and *acdc-HPLMNonly* indicates that ACDC is applicable for the UE:

2> if the *BarringPerACDC-CategoryList* contains a *BarringPerACDC-Category* entry corresponding to the ACDC category selected by upper layers:

3> select the *BarringPerACDC-Category* entry corresponding to the ACDC category selected by upper layers;

2> else:

3> select the last *BarringPerACDC-Category* entry in the *BarringPerACDC-CategoryList*;

DAINGEAN_0001856

2> stop timer T308, if running;

2> perform access barring check as specified in 5.3.3.13, using T308 as "Tbarring" and *acdc-BarringConfig* in the *BarringPerACDC-Category* as "ACDC barring parameter";

2> if access to the cell is barred:

3> inform upper layers about the failure to establish the RRC connection and that access barring is applicable due to ACDC, upon which the procedure ends;

1> else if the UE is establishing the RRC connection for mobile terminating calls:

2> if timer T302 is running:

3> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile terminating calls is applicable, upon which the procedure ends;

1> else if the UE is establishing the RRC connection for emergency calls:

2> if *SystemInformationBlockType2* includes the *ac-BarringInfo*:

3> if the *ac-BarringForEmergency* is set to *TRUE*:

4> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11]:

NOTE 1: ACs 12, 13, 14 are only valid for use in the home country and ACs 11, 15 are only valid for use in the HPLMN/ EHPLMN.

5> if the *ac-BarringInfo* includes *ac-BarringForMO-Data*, and for all of these valid Access Classes for the UE, the corresponding bit in the *ac-BarringForSpecialAC* contained in *ac-BarringForMO-Data* is set to *one*:

6> consider access to the cell as barred;

4> else:

5> consider access to the cell as barred;

2> if access to the cell is barred:

3> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication, upon which the procedure ends;

1> else if the UE is establishing the RRC connection for mobile originating calls:

2> perform access barring check as specified in 5.3.3.11, using T303 as "Tbarring" and *ac-BarringForMO-Data* as "AC barring parameter";

2> if access to the cell is barred:

3> if *SystemInformationBlockType2* includes *ac-BarringForCSFB* or the UE does not support CS fallback:

4> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating calls is applicable, upon which the procedure ends;

3> else (*SystemInformationBlockType2* does not include *ac-BarringForCSFB* and the UE supports CS fallback):

4> if timer T306 is not running, start T306 with the timer value of T303;

4> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating calls and mobile originating CS fallback is applicable, upon which the procedure ends;

DAINGEAN_0001857

1> else if the UE is establishing the RRC connection for mobile originating signalling:

2> perform access barring check as specified in 5.3.3.11, using T305 as "Tbarring" and *ac-BarringForMO-Signalling* as "AC barring parameter";

2> if access to the cell is barred:

3> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating signalling is applicable, upon which the procedure ends;

1> else if the UE is establishing the RRC connection for mobile originating CS fallback:

2> if *SystemInformationBlockType2* includes *ac-BarringForCSFB*:

3> perform access barring check as specified in 5.3.3.11, using T306 as "Tbarring" and *ac-BarringForCSFB* as "AC barring parameter";

3> if access to the cell is barred:

4> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating CS fallback is applicable, due to *ac-BarringForCSFB*, upon which the procedure ends;

2> else:

3> perform access barring check as specified in 5.3.3.11, using T306 as "Tbarring" and *ac-BarringForMO-Data* as "AC barring parameter";

3> if access to the cell is barred:

4> if timer T303 is not running, start T303 with the timer value of T306;

4> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating CS fallback and mobile originating calls is applicable, due to *ac-BarringForMO-Data*, upon which the procedure ends;

1> else if the UE is establishing the RRC connection for mobile originating MMTEL voice, mobile originating MMTEL video, mobile originating SMSoIP or mobile originating SMS:

2> if the UE is establishing the RRC connection for mobile originating MMTEL voice and *SystemInformationBlockType2* includes *ac-BarringSkipForMMTELVoice*; or

2> if the UE is establishing the RRC connection for mobile originating MMTEL video and *SystemInformationBlockType2* includes *ac-BarringSkipForMMTELVideo*; or

2> if the UE is establishing the RRC connection for mobile originating SMSoIP or SMS and *SystemInformationBlockType2* includes *ac-BarringSkipForSMS*:

3> consider access to the cell as not barred;

2> else:

3> if *establishmentCause* received from higher layers is set to *mo-Signalling* (including the case that *mo-Signalling* is replaced by *highPriorityAccess* according to 3GPP TS 24.301 [35] or by *mo-VoiceCall* according to the subclause 5.3.3.3):

4> perform access barring check as specified in 5.3.3.11, using T305 as "Tbarring" and *ac-BarringForMO-Signalling* as "AC barring parameter";

4> if access to the cell is barred:

5> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating signalling is applicable, upon which the procedure ends;

DAINGEAN_0001858

3> if *establishmentCause* received from higher layers is set to *mo-Data* (including the case that *mo-Data* is replaced by *highPriorityAccess* according to 3GPP TS 24.301 [35] or by *mo-VoiceCall* according to the subclause 5.3.3.3):

4> perform access barring check as specified in 5.3.3.11, using T303 as "Tbarring" and *ac-BarringForMO-Data* as "AC barring parameter";

4> if access to the cell is barred:

5> if *SystemInformationBlockType2* includes *ac-BarringForCSFB* or the UE does not support CS fallback:

6> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating calls is applicable, upon which the procedure ends;

5> else (*SystemInformationBlockType2* does not include *ac-BarringForCSFB* and the UE supports CS fallback):

6> if timer T306 is not running, start T306 with the timer value of T303;

6> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring for mobile originating calls and mobile originating CS fallback is applicable, upon which the procedure ends;

1> if the UE is resuming an RRC connection:

2> release the MCG SCell(s), if configured, in accordance with 5.3.10.3a;

2> release powerPrefIndicationConfig, if configured and stop timer T340, if running;

2> release *reportProximityConfig* and clear any associated proximity status reporting timer;

2> release *obtainLocationConfig*, if configured;

2> release *idc-Config*, if configured;

2> release *measSubframePatternPCell*, if configured;

2> release the entire SCG configuration, if configured, except for the DRB configuration (as configured by *drb-ToAddModListSCG*);

2> release *naics-Info* for the PCell, if configured;

2> release the LWA configuration, if configured, as described in 5.6.14.3;

2> release the LWIP configuration, if configured, as described in 5.6.17.3;

1> apply the default physical channel configuration as specified in 9.2.4;

1> apply the default semi-persistent scheduling configuration as specified in 9.2.3;

1> apply the default MAC main configuration as specified in 9.2.2;

1> apply the CCCH configuration as specified in 9.1.1.2;

1> apply the *timeAlignmentTimerCommon* included in *SystemInformationBlockType2*;

1> start timer T300;

1> if the UE is resuming an RRC connection:

2> initiate transmission of the *RRCConnectionResumeRequest* message in accordance with 5.3.3.3a;

1> else:

2> if stored, discard the UE AS context and *resumeIdentity*;

DAINGEAN_0001859

2> initiate transmission of the *RRCConnectionRequest* message in accordance with 5.3.3.3;

NOTE 2: Upon initiating the connection establishment procedure, the UE is not required to ensure it maintains up to date system information applicable only for UEs in RRC_IDLE state. However, the UE needs to perform system information acquisition upon cell re-selection.

For NB-IoT, upon initiation of the procedure, the UE shall:

1> if the UE is establishing or resuming the RRC connection for mobile originating exception data; or

1> if the UE is establishing or resuming the RRC connection for mobile originating data; or

1> if the UE is establishing or resuming the RRC connection for mobile originating signalling;

2> perform access barring check as specified in 5.3.3.14;

2> if access to the cell is barred:

3> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication and that access barring is applicable, upon which the procedure ends;

1> apply the default physical channel configuration as specified in 9.2.4;

1> apply the default MAC main configuration as specified in 9.2.2;

1> apply the CCCH configuration as specified in 9.1.1.2;

1> start timer T300;

1> if the UE is establishing an RRC connection:

2> initiate transmission of the *RRCConnectionRequest* message in accordance with 5.3.3.3;

1> else if the UE is resuming an RRC connection:

2> initiate transmission of the *RRCConnectionResumeRequest* message in accordance with 5.3.3.3a;

NOTE 3: Upon initiating the connection establishment or resumption procedure, the UE is not required to ensure it maintains up to date system information applicable only for UEs in RRC_IDLE state. However, the UE needs to perform system information acquisition upon cell re-selection.

5.3.3.3 Actions related to transmission of *RRCConnectionRequest* message

The UE shall set the contents of *RRCConnectionRequest* message as follows:

1> set the *ue-Identity* as follows:

2> if upper layers provide an S-TMSI:

3> set the *ue-Identity* to the value received from upper layers;

2> else:

3> draw a random value in the range 0 .. 2^{40}-1 and set the *ue-Identity* to this value;

NOTE 1: Upper layers provide the S-TMSI if the UE is registered in the TA of the current cell.

1> if the UE supports *mo-VoiceCall* establishment cause and UE is establishing the RRC connection for mobile originating MMTEL voice and *SystemInformationBlockType2* includes *voiceServiceCauseIndication*:

2> set the *establishmentCause* to *mo-VoiceCall*;

1> else:

2> set the *establishmentCause* in accordance with the information received from upper layers;

1> if the UE is a NB-IoT UE:

DAINGEAN_0001860

2> if the UE supports multi-tone transmission, include *multiToneSupport*;

2> if the UE supports multi-carrier operation, include *multiCarrierSupport*;

The UE shall submit the *RRCConnectionRequest* message to lower layers for transmission.

The UE shall continue cell re-selection related measurements as well as cell re-selection evaluation. If the conditions for cell re-selection are fulfilled, the UE shall perform cell re-selection as specified in 5.3.3.5.

5.3.3.3a Actions related to transmission of *RRCConnectionResumeRequest* message

The UE shall set the contents of *RRCConnectionResumeRequest* message as follows:

1> if the UE is a NB-IoT UE; or

1> if field *useFullResumeID* is signalled in *SystemInformationBlockType2*:

2> set the *resumeID* to the stored *resumeIdentity*;

1> else

2> set the *truncatedResumeID* to include bits in bit position 9 to 20 and 29 to 40 from the left in the stored *resumeIdentity*.

1> if the UE supports *mo-VoiceCall* establishment cause and UE is resuming the RRC connection for mobile originating MMTEL voice and *SystemInformationBlockType2* includes *voiceServiceCauseIndication*:

2> set the *resumeCause* to *mo-VoiceCall*;

1> else

2> set the *resumeCause* in accordance with the information received from upper layers;

1> set the *shortResumeMAC-I* to the 16 least significant bits of the MAC-I calculated:

2> over the ASN.1 encoded as per section 8 (i.e., a multiple of 8 bits) *VarShortResumeMAC-Input* (or *VarShortResumeMAC-Input-NB* in NB-IoT);

2> with the K_{RRCint} key and the previously configured integrity protection algorithm; and

2> with all input bits for COUNT, BEARER and DIRECTION set to binary ones;

The UE shall submit the *RRCConnectionResumeRequest* message to lower layers for transmission.

The UE shall continue cell re-selection related measurements as well as cell re-selection evaluation. If the conditions for cell re-selection are fulfilled, the UE shall perform cell re-selection as specified in 5.3.3.5.

5.3.3.4 Reception of the *RRCConnectionSetup* by the UE

NOTE: Prior to this, lower layer signalling is used to allocate a C-RNTI. For further details see TS 36.321 [6];

The UE shall:

1> if the *RRCConnectionSetup* is received in response to an *RRCConnectionResumeRequest*:

2> discard the stored UE AS context and *resumeIdentity*;

2> indicate to upper layers that the RRC connection resume has been fallbacked;

1> perform the radio resource configuration procedure in accordance with the received *radioResourceConfigDedicated* and as specified in 5.3.10;

1> if stored, discard the cell reselection priority information provided by the *idleModeMobilityControlInfo* or inherited from another RAT;

1> stop timer T300;

DAINGEAN_0001861

1> stop timer T302, if running;

1> stop timer T303, if running;

1> stop timer T305, if running;

1> stop timer T306, if running;

1> stop timer T308, if running;

1> perform the actions as specified in 5.3.3.7;

1> stop timer T320, if running;

1> stop timer T350, if running;

1> perform the actions as specified in 5.6.12.4;

1> release *rclwi-Configuration*, if configured;

1> stop timer T360, if running;

1> enter RRC_CONNECTED;

1> stop the cell re-selection procedure;

1> consider the current cell to be the PCell;

1> set the content of *RRCConnectionSetupComplete* message as follows:

2> if the *RRCConnectionSetup* is received in response to an *RRCConnectionResumeRequest*:

3> if upper layers provide an S-TMSI:

4> set the *s-TMSI* to the value received from upper layers;

2> set the *selectedPLMN-Identity* to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]) from the PLMN(s) included in the *plmn-IdentityList* in *SystemInformationBlockType1* (or *SystemInformationBlockType1-NB* in NB-IoT);

2> if upper layers provide the 'Registered MME', include and set the *registeredMME* as follows:

3> if the PLMN identity of the 'Registered MME' is different from the PLMN selected by the upper layers:

4> include the *plmnIdentity* in the *registeredMME* and set it to the value of the PLMN identity in the 'Registered MME' received from upper layers;

3> set the *mmegi* and the *mmec* to the value received from upper layers;

2> except for NB-IoT, if upper layers provided the 'Registered MME':

3> include and set the *gummei-Type* to the value provided by the upper layers;

2> if the UE supports CIoT EPS optimisation(s):

3> if the UE is establishing the RRC connection for mobile originating signalling:

4> include a*ttachWithoutPDN-Connectivity* if received from upper layers;

4> for NB-IoT, include *up-CIoT-EPS-Optimisation* if received from upper layers;

3> except for NB-IoT, include *up-CIoT-EPS-Optimisation* if received from upper layers;

3> except for NB-IoT, include *cp-CIoT-EPS-Optimisation* if received from upper layers;

2> if connecting as an RN:

3> include the *rn-SubframeConfigReq*;

DAINGEAN_0001862

2> set the *dedicatedInfoNAS* to include the information received from upper layers;

2> except for NB-IoT:

3> if the UE has radio link failure or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

4> include *rlf-InfoAvailable*;

3> if the UE has MBSFN logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

4> include *logMeasAvailableMBSFN*;

3> else if the UE has logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

4> include *logMeasAvailable*;

3> if the UE has connection establishment failure information available in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

4> include *connEstFailInfoAvailable*;

3> include the *mobilityState* and set it to the mobility state (as specified in TS 36.304 [4]) of the UE just prior to entering RRC_CONNECTED state;

3> if the UE supports storage of mobility history information and the UE has mobility history information available in *VarMobilityHistoryReport*:

4> include the *mobilityHistoryAvail*;

2> submit the *RRCConnectionSetupComplete* message to lower layers for transmission, upon which the procedure ends;

5.3.3.4a Reception of the *RRCConnectionResume* by the UE

The UE shall:

1> stop timer T300;

1> restore the RRC configuration and security context from the stored UE AS context:

1> re-establish RLC entities for all SRBs and DRBs;

1> restore the PDCP state and re-establish PDCP entities for all SRBs and DRBs;

1> if *drb-ContinueROHC* is included:

2> indicate to lower layers that stored UE AS context is used and that *drb-ContinueROHC* is configured;

2> continue the header compression protocol context for the DRBs configured with the header compression protocol;

1> else:

2> indicate to lower layers that stored UE AS context is used;

2> reset the header compression protocol context for the DRBs configured with the header compression protocol;

1> discard the stored UE AS context and *resumeIdentity*;

1> perform the radio resource configuration procedure in accordance with the received *radioResourceConfigDedicated* and as specified in 5.3.10;

1> resume SRBs and DRBs;

DAINGEAN_0001863

1> if stored, discard the cell reselection priority information provided by the *idleModeMobilityControlInfo* or inherited from another RAT;

1 >stop timer T302, if running;

1> stop timer T303, if running;

1> stop timer T305, if running;

1> stop timer T306, if running;

1> stop timer T308, if running;

1> perform the actions as specified in 5.3.3.7;

1> stop timer T320, if running;

1> stop timer T350, if running;

1> perform the actions as specified in 5.6.12.4;

1> stop timer T360, if running;

1> update the K_{eNB} key based on the K_{ASME} key to which the current K_{eNB} is associated, using the *nextHopChainingCount* value indicated in the *RRCConnectionResume* message, as specified in TS 33.401 [32];

1> store the *nextHopChainingCount* value;

1> derive the K_{RRCint} key associated with the previously configured integrity algorithm, as specified in TS 33.401 [32];

1> request lower layers to verify the integrity protection of the *RRCConnectionResume* message, using the previously configured algorithm and the K_{RRCint} key;

1> if the integrity protection check of the *RRCConnectionResume* message fails:

2> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'other', upon which the procedure ends;

1> derive the K_{RRCenc} key and the K_{UPenc} key associated with the previously configured ciphering algorithm, as specified in TS 33.401 [32];

1> configure lower layers to activate integrity protection using the previously configured algorithm and the K_{RRCint} key immediately, i.e., integrity protection shall be applied to all subsequent messages received and sent by the UE;

1> configure lower layers to apply the ciphering algorithm, the K_{RRCenc} key and the K_{UPenc} key, i.e. the ciphering configuration shall be applied to all subsequent messages received and sent by the UE;

1> enter RRC_CONNECTED;

1> indicate to upper layers that the suspended RRC connection has been resumed;

1> stop the cell re-selection procedure;

1> consider the current cell to be the PCell;

1> set the content of *RRCConnectionResumeComplete* message as follows:

2> set the *selectedPLMN-Identity* to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]) from the PLMN(s) included in the *plmn-IdentityList* in *SystemInformationBlockType1*;

2> set the *dedicatedInfoNAS* to include the information received from upper layers;

2> except for NB-IoT:

3> if the UE has radio link failure or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

DAINGEAN_0001864

4> include *rlf-InfoAvailable*;

3> if the UE has MBSFN logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

4> include *logMeasAvailableMBSFN*;

3> else if the UE has logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

4> include *logMeasAvailable*;

3> if the UE has connection establishment failure information available in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

4> include *connEstFailInfoAvailable*;

3> include the *mobilityState* and set it to the mobility state (as specified in TS 36.304 [4]) of the UE just prior to entering RRC_CONNECTED state;

3> if the UE supports storage of mobility history information and the UE has mobility history information available in *VarMobilityHistoryReport*:

4> include *mobilityHistoryAvail*;

1> submit the *RRCConnectionResumeComplete* message to lower layers for transmission;

1> the procedure ends.

5.3.3.5 Cell re-selection while T300, T302, T303, T305, T306, or T308 is running

The UE shall:

1> if cell reselection occurs while T300, T302, T303, T305, T306, or T308 is running:

2> if timer T302, T303, T305,T306, and/or T308 is running:

3> stop timer T302, T303, T305, T306, and T308, whichever ones were running;

3> perform the actions as specified in 5.3.3.7;

2> if timer T300 is running:

3> stop timer T300;

3> reset MAC, release the MAC configuration and re-establish RLC for all RBs that are established;

3> inform upper layers about the failure to establish the RRC connection;

5.3.3.6 T300 expiry

The UE shall:

1> if timer T300 expires:

2> reset MAC, release the MAC configuration and re-establish RLC for all RBs that are established;

2> if the UE is a NB-IoT UE and *connEstFailOffset* is included in *SystemInformationBlockType2-NB*:

3> use *connEstFailOffset* for the parameter $Qoffset_{temp}$ for the concerned cell when performing cell selection and reselection according to TS 36.304 [4];

NOTE 0: For NB-IoT, the number of times that the UE detects T300 expiry on the same cell before applying connEstFailOffset and the amount of time that the UE applies connEstFailOffset before removing the offset from evaluation of the cell is up to UE implementation.

DAINGEAN_0001865

2> else if the UE supports RRC Connection Establishment failure temporary Qoffset and T300 has expired a consecutive *connEstFailCount* times on the same cell for which *txFailParams* is included in *SystemInformationBlockType2*:

3> for a period as indicated by *connEstFailOffsetValidity*:

4> use *connEstFailOffset* for the parameter $Qoffset_{temp}$ for the concerned cell when performing cell selection and reselection according to TS 36.304 [4] and TS 25.304 [40];

NOTE 1: When performing cell selection, if no suitable or acceptable cell can be found, it is up to UE implementation whether to stop using *connEstFailOffset* for the parameter $Qoffset_{temp}$ during *connEstFailOffsetValidity* for the concerned cell.

2> except for NB-IoT, store the following connection establishment failure information in the *VarConnEstFailReport* by setting its fields as follows:

3> clear the information included in *VarConnEstFailReport*, if any;

3> set the *plmn-Identity* to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]) from the PLMN(s) included in the *plmn-IdentityList* in *SystemInformationBlockType1*;

3> set the *failedCellId* to the global cell identity of the cell where connection establishment failure is detected;

3> set the *measResultFailedCell* to include the RSRP and RSRQ, if available, of the cell where connection establishment failure is detected and based on measurements collected up to the moment the UE detected the failure;

3> if available, set the *measResultNeighCells*, in order of decreasing ranking-criterion as used for cell re-selection, to include neighbouring cell measurements for at most the following number of neighbouring cells: 6 intra-frequency and 3 inter-frequency neighbours per frequency as well as 3 inter-RAT neighbours, per frequency/ set of frequencies (GERAN) per RAT and according to the following:

4> for each neighbour cell included, include the optional fields that are available;

NOTE 2: The UE includes the latest results of the available measurements as used for cell reselection evaluation, which are performed in accordance with the performance requirements as specified in TS 36.133 [16].

3> if detailed location information is available, set the content of the *locationInfo* as follows:

4> include the *locationCoordinates*;

4> include the *horizontalVelocity*, if available;

3> set the *numberOfPreamblesSent* to indicate the number of preambles sent by MAC for the failed random access procedure;

3> set *contentionDetected* to indicate whether contention resolution was not successful as specified in TS 36.321 [6] for at least one of the transmitted preambles for the failed random access procedure;

3> set *maxTxPowerReached* to indicate whether or not the maximum power level was used for the last transmitted preamble, see TS 36.321 [6];

2> inform upper layers about the failure to establish the RRC connection or failure to resume the RRC connection with suspend indication, upon which the procedure ends;

The UE may discard the connection establishment failure information, i.e. release the UE variable *VarConnEstFailReport,* 48 hours after the failure is detected, upon power off or upon detach.

5.3.3.7 T302, T303, T305, T306, or T308 expiry or stop

The UE shall:

1> if timer T302 expires or is stopped:

2> inform upper layers about barring alleviation for mobile terminating access;

DAINGEAN_0001866

2> if timer T303 is not running:

3> inform upper layers about barring alleviation for mobile originating calls;

2> if timer T305 is not running:

3> inform upper layers about barring alleviation for mobile originating signalling;

2> if timer T306 is not running:

3> inform upper layers about barring alleviation for mobile originating CS fallback;

2> if timer T308 is not running:

3> inform upper layers about barring alleviation for ACDC;

1> if timer T303 expires or is stopped:

2> if timer T302 is not running:

3> inform upper layers about barring alleviation for mobile originating calls;

1> if timer T305 expires or is stopped:

2> if timer T302 is not running:

3> inform upper layers about barring alleviation for mobile originating signalling;

1> if timer T306 expires or is stopped:

2> if timer T302 is not running:

3> inform upper layers about barring alleviation for mobile originating CS fallback;

1> if timer T308 expires or is stopped:

2> if timer T302 is not running:

3> inform upper layers about barring alleviation for ACDC;

5.3.3.8 Reception of the *RRCConnectionReject* by the UE

The UE shall:

1> stop timer T300;

1> reset MAC and release the MAC configuration;

1> except for NB-IoT, start timer T302, with the timer value set to the *waitTime*;

1> if the UE is a NB-IoT UE; or

1> if the *extendedWaitTime* is present and the UE supports delay tolerant access:

2> forward the *extendedWaitTime* to upper layers;

1> if *deprioritisationReq* is included and the UE supports RRC Connection Reject with deprioritisation:

2> start or restart timer T325 with the timer value set to the *deprioritisationTimer* signalled;

2> store the *deprioritisationReq* until T325 expiry;

NOTE: The UE stores the deprioritisation request irrespective of any cell reselection absolute priority assignments (by dedicated or common signalling) and regardless of RRC connections in E-UTRAN or other RATs unless specified otherwise.

1> if the *RRCConnectionReject* is received in response to an *RRCConnectionResumeRequest*:

DAINGEAN_0001867

2> if the *rrc-SuspendIndication* is not present:

3> discard the stored UE AS context and *resumeIdentity*;

3> inform upper layers about the failure to resume the RRC connection without suspend indication and that access barring for mobile originating calls, mobile originating signalling, mobile terminating access and except for NB-IoT for mobile originating CS fallback is applicable, upon which the procedure ends;

2> else:

3> inform upper layers about the failure to resume the RRC connection with suspend indication and that access barring for mobile originating calls, mobile originating signalling, mobile terminating access and except for NB-IoT for mobile originating CS fallback is applicable, upon which the procedure ends;

1> else

2> inform upper layers about the failure to establish the RRC connection and that access barring for mobile originating calls, mobile originating signalling, mobile terminating access and except for NB-IoT, for mobile originating CS fallback is applicable, upon which the procedure ends;

5.3.3.9 Abortion of RRC connection establishment

If upper layers abort the RRC connection establishment procedure while the UE has not yet entered RRC_CONNECTED, the UE shall:

1> stop timer T300, if running;

1> reset MAC, release the MAC configuration and re-establish RLC for all RBs that are established;

5.3.3.10 Handling of SSAC related parameters

Upon request from the upper layers, the UE shall:

1> if *SystemInformationBlockType2* includes *ac-BarringPerPLMN-List* and the *ac-BarringPerPLMN-List* contains an *AC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]):

2> select the *AC-BarringPerPLMN* entry with the *plmn-IdentityIndex* corresponding to the PLMN selected by upper layers;

2> in the remainder of this procedure, use the selected *AC-BarringPerPLMN* entry (i.e. presence or absence of access barring parameters in this entry) irrespective of the common access barring parameters included in *SystemInformationBlockType2*;

1> else:

2> in the remainder of this procedure use the common access barring parameters (i.e. presence or absence of these parameters) included in *SystemInformationBlockType2*;

1> set the local variables *BarringFactorForMMTEL-Voice* and *BarringTimeForMMTEL-Voice* as follows:

2> if *ssac-BarringForMMTEL-Voice* is present:

3> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11], and

NOTE: ACs 12, 13, 14 are only valid for use in the home country and ACs 11, 15 are only valid for use in the HPLMN/ EHPLMN.

3> if, for at least one of these Access Classes, the corresponding bit in the *ac-BarringForSpecialAC* contained in *ssac-BarringForMMTEL-Voice* is set to zero:

4> set *BarringFactorForMMTEL-Voice* to one and *BarringTimeForMMTEL-Voice* to zero;

3> else:

DAINGEAN_0001868

4> set *BarringFactorForMMTEL-Voice* and *BarringTimeForMMTEL-Voice* to the value of *ac-BarringFactor* and *ac-BarringTime* included in *ssac-BarringForMMTEL-Voice*, respectively;

2> else set *BarringFactorForMMTEL-Voice* to one and *BarringTimeForMMTEL-Voice* to zero;

1> set the local variables *BarringFactorForMMTEL-Video* and *BarringTimeForMMTEL-Video* as follows:

2> if *ssac-BarringForMMTEL-Video* is present:

3> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11], and

3> if, for at least one of these Access Classes, the corresponding bit in the *ac-BarringForSpecialAC* contained in *ssac-BarringForMMTEL-Video* is set to zero:

4> set *BarringFactorForMMTEL-Video* to one and *BarringTimeForMMTEL-Video* to zero;

3> else:

4> set *BarringFactorForMMTEL-Video* and *BarringTimeForMMTEL-Video* to the value of *ac-BarringFactor* and *ac-BarringTime* included in *ssac-BarringForMMTEL-Video*, respectively;

2> else set *BarringFactorForMMTEL-Video* to one and *BarringTimeForMMTEL-Video* to zero;

1> forward the variables *BarringFactorForMMTEL-Voice*, *BarringTimeForMMTEL-Voice*, *BarringFactorForMMTEL-Video* and *BarringTimeForMMTEL-Video* to the upper layers;

5.3.3.11 Access barring check

1> if timer T302 or "Tbarring" is running:

2> consider access to the cell as barred;

1> else if *SystemInformationBlockType2* includes "AC barring parameter":

2> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11], and

NOTE: ACs 12, 13, 14 are only valid for use in the home country and ACs 11, 15 are only valid for use in the HPLMN/ EHPLMN.

2> for at least one of these valid Access Classes the corresponding bit in the *ac-BarringForSpecialAC* contained in "AC barring parameter" is set to *zero*:

3> consider access to the cell as not barred;

2> else:

3> draw a random number '*rand*' uniformly distributed in the range: $0 \leq rand < 1$;

3> if '*rand*' is lower than the value indicated by *ac-BarringFactor* included in "AC barring parameter":

4> consider access to the cell as not barred;

3> else:

4> consider access to the cell as barred;

1> else:

2> consider access to the cell as not barred;

1> if access to the cell is barred and both timers T302 and "Tbarring" are not running:

2> draw a random number '*rand*' that is uniformly distributed in the range $0 \leq rand < 1$;

DAINGEAN_0001869

2> start timer "Tbarring" with the timer value calculated as follows, using the *ac-BarringTime* included in "AC barring parameter":

"Tbarring" = (0.7+ 0.6 * *rand*) * *ac-BarringTime*;

5.3.3.12 EAB check

The UE shall:

1> if *SystemInformationBlockType14* is present and includes the *eab-Param*:

2> if the *eab-Common* is included in the *eab-Param*:

3> if the UE belongs to the category of UEs as indicated in the *eab-Category* contained in *eab-Common*; and

3> if for the Access Class of the UE, as stored on the USIM and with a value in the range 0..9, the corresponding bit in the *eab-BarringBitmap* contained in *eab-Common* is set to *one*:

4> consider access to the cell as barred;

3> else:

4> consider access to the cell as not barred due to EAB;

2> else (the *eab-PerPLMN-List* is included in the *eab-Param*):

3> select the entry in the *eab-PerPLMN-List* corresponding to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]);

3> if the *eab-Config* for that PLMN is included:

4> if the UE belongs to the category of UEs as indicated in the *eab-Category* contained in *eab-Config*; and

4> if for the Access Class of the UE, as stored on the USIM and with a value in the range 0..9, the corresponding bit in the *eab-BarringBitmap* contained in *eab-Config* is set to *one*:

5> consider access to the cell as barred;

4> else:

5> consider access to the cell as not barred due to EAB;

3> else:

4> consider access to the cell as not barred due to EAB;

1> else:

2> consider access to the cell as not barred due to EAB;

5.3.3.13 Access barring check for ACDC

The UE shall:

1> if timer T302 is running:

2> consider access to the cell as barred;

1> else if *SystemInformationBlockType2* includes "ACDC barring parameter":

2> draw a random number '*rand*' uniformly distributed in the range: $0 \leq rand < 1$;

2> if '*rand*' is lower than the value indicated by *ac-BarringFactor* included in "ACDC barring parameter":

3> consider access to the cell as not barred;

DAINGEAN_0001870

2> else:

3> consider access to the cell as barred;

1> else:

2> consider access to the cell as not barred;

1> if access to the cell is barred and timer T302 is not running:

2> draw a random number '*rand*' that is uniformly distributed in the range $0 \leq rand < 1$;

2> start timer "Tbarring" with the timer value calculated as follows, using the *ac-BarringTime* included in "ACDC barring parameter":

"Tbarring" = $(0.7 + 0.6 * rand) * ac\text{-}BarringTime$.

5.3.3.14 Access Barring check for NB-IoT

The UE shall:

1> if *ab-Enabled* included in *MasterInformationBlock-NB* is set to *TRUE* and *SystemInformationBlockType14-NB* is broadcast:

2> if the *ab-Common* is included in *ab-Param:*

3> if the UE belongs to the category of UEs as indicated in the *ab-Category* contained in *ab-Common*; and

3> if for the Access Class of the UE, as stored on the USIM and with a value in the range 0..9, the corresponding bit in the *ab-BarringBitmap* contained in *ab-Common* is set to *one*:

4> if the *establishmentCause* received from higher layers is set to *mo-ExceptionData* and *ab-BarringForExceptionData* is set to *FALSE* in the *ab-Common*:

5> consider access to the cell as not barred;

4> else:

5> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11] and for at least one of these valid Access Classes for the UE, the corresponding bit in the *ab-BarringForSpecialAC* contained in *ab-Common* is set to *zero*:

NOTE 1: ACs 12, 13, 14 are only valid for use in the home country and ACs 11, 15 are only valid for use in the HPLMN/ EHPLMN.

6> consider access to the cell as not barred;

5> else:

6> consider access to the cell as barred;

3> else;

4> consider access to the cell as not barred;

2> else (the *ab-PerPLMN-List* is included in the *ab-Param*):

3> select the *ab-PerPLMN* entry in *ab-PerPLMN-List* corresponding to the PLMN selected by upper layers (see TS 23.122 [11], TS 24.301 [35]);

3> if the *ab-Config* for that PLMN is included:

4> if for the Access Class of the UE, as stored on the USIM and with a value in the range 0..9, the corresponding bit in the *ab-BarringBitmap* contained in *ab-Config* is set to *one*:

DAINGEAN_0001871

5> if the *establishmentCause* received from higher layers is set to *mo-ExceptionData* and *ab-BarringForExceptionData* is set to *FALSE* in the *ab-Config*:

6> consider access to the cell as not barred;

5> else:

6> if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11] and for at least one of these valid Access Classes for the UE, the corresponding bit in the *ab-BarringForSpecialAC* contained in *ab-Config* is set to *zero*:

NOTE 2: ACs 12, 13, 14 are only valid for use in the home country and ACs 11, 15 are only valid for use in the HPLMN/ EHPLMN.

7> consider access to the cell as not barred;

6> else:

7> consider access to the cell as barred;

4> else:

5> consider access to the cell as not barred;

3> else:

4> consider access to the cell as not barred;

1> else:

2> consider access to the cell as not barred;

5.3.4 Initial security activation

5.3.4.1 General

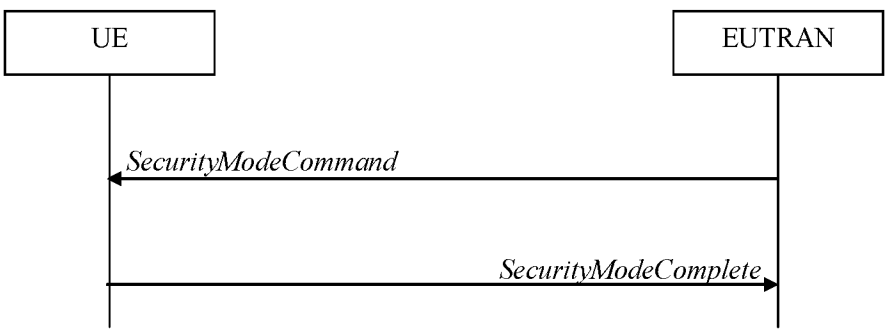


Figure 5.3.4.1-1: Security mode command, successful

DAINGEAN_0001872

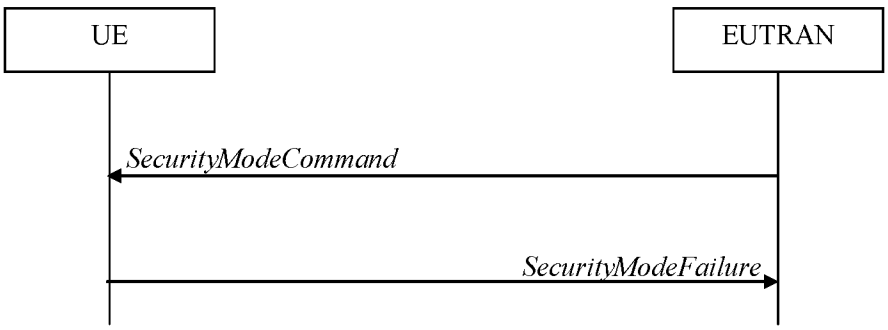


Figure 5.3.4.1-2: Security mode command, failure

The purpose of this procedure is to activate AS security upon RRC connection establishment.

5.3.4.2 Initiation

E-UTRAN initiates the security mode command procedure to a UE in RRC_CONNECTED. Moreover, E-UTRAN applies the procedure as follows:

- when only SRB1 is established, i.e. prior to establishment of SRB2 and/ or DRBs.

5.3.4.3 Reception of the *SecurityModeCommand* by the UE

The UE shall:

1> derive the K_{eNB} key, as specified in TS 33.401 [32];

1> derive the K_{RRCint} key associated with the *integrityProtAlgorithm* indicated in the *SecurityModeCommand* message, as specified in TS 33.401 [32];

1> request lower layers to verify the integrity protection of the *SecurityModeCommand* message, using the algorithm indicated by the *integrityProtAlgorithm* as included in the *SecurityModeCommand* message and the K_{RRCint} key;

1> if the *SecurityModeCommand* message passes the integrity protection check:

2> derive the K_{RRCenc} key and the K_{UPenc} key associated with the *cipheringAlgorithm* indicated in the *SecurityModeCommand* message, as specified in TS 33.401 [32];

2> if connected as an RN:

3> derive the K_{UPint} key associated with the *integrityProtAlgorithm* indicated in the *SecurityModeCommand* message, as specified in TS 33.401 [32];

2> configure lower layers to apply integrity protection using the indicated algorithm and the K_{RRCint} key immediately, i.e. integrity protection shall be applied to all subsequent messages received and sent by the UE, including the *SecurityModeComplete* message;

2> configure lower layers to apply ciphering using the indicated algorithm, the K_{RRCenc} key and the K_{UPenc} key after completing the procedure, i.e. ciphering shall be applied to all subsequent messages received and sent by the UE, except for the *SecurityModeComplete* message which is sent unciphered;

2> if connected as an RN:

3> configure lower layers to apply integrity protection using the indicated algorithm and the K_{UPint} key, for DRBs that are subsequently configured to apply integrity protection, if any;

2> consider AS security to be activated;

2> submit the *SecurityModeComplete* message to lower layers for transmission, upon which the procedure ends;

1> else:

DAINGEAN_0001873

2> continue using the configuration used prior to the reception of the *SecurityModeCommand* message, i.e. neither apply integrity protection nor ciphering.

2> submit the *SecurityModeFailure* message to lower layers for transmission, upon which the procedure ends;

5.3.5 RRC connection reconfiguration

5.3.5.1 General

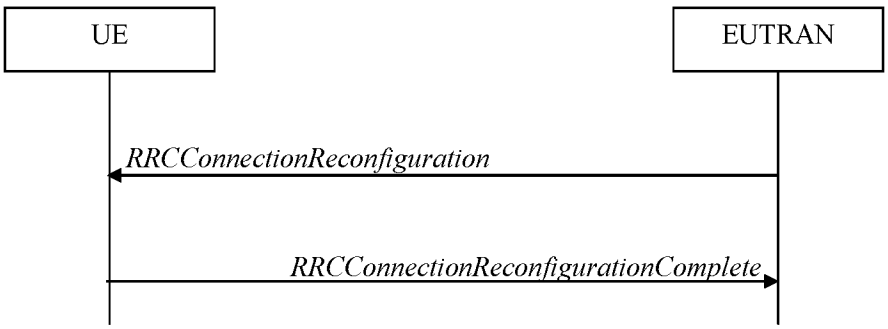


Figure 5.3.5.1-1: RRC connection reconfiguration, successful

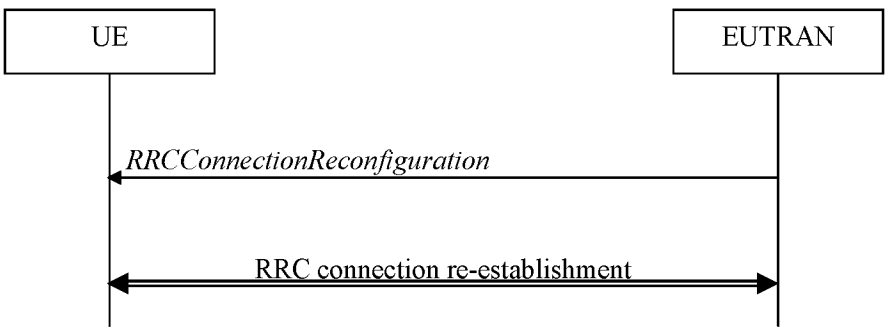


Figure 5.3.5.1-2: RRC connection reconfiguration, failure

The purpose of this procedure is to modify an RRC connection, e.g. to establish/ modify/ release RBs, to perform handover, to setup/ modify/ release measurements, to add/ modify/ release SCells. As part of the procedure, NAS dedicated information may be transferred from E-UTRAN to the UE.

5.3.5.2 Initiation

E-UTRAN may initiate the RRC connection reconfiguration procedure to a UE in RRC_CONNECTED. E-UTRAN applies the procedure as follows:

- the *mobilityControlInfo* is included only when AS-security has been activated, and SRB2 with at least one DRB are setup and not suspended;
- the establishment of RBs (other than SRB1, that is established during RRC connection establishment) is included only when AS security has been activated;
- the addition of SCells is performed only when AS security has been activated;

5.3.5.3 Reception of an *RRCConnectionReconfiguration* not including the *mobilityControlInfo* by the UE

If the *RRCConnectionReconfiguration* message does not include the *mobilityControlInfo* and the UE is able to comply with the configuration included in this message, the UE shall:

DAINGEAN_0001874

1> if this is the first *RRCConnectionReconfiguration* message after successful completion of the RRC connection re-establishment procedure:

2> re-establish PDCP for SRB2 and for all DRBs that are established, if any;

2> re-establish RLC for SRB2 and for all DRBs that are established, if any;

2> if the *RRCConnectionReconfiguration* message includes the *fullConfig*:

3> perform the radio configuration procedure as specified in 5.3.5.8;

2> if the *RRCConnectionReconfiguration* message includes the *radioResourceConfigDedicated*:

3> perform the radio resource configuration procedure as specified in 5.3.10;

2> resume SRB2 and all DRBs that are suspended, if any;

NOTE 1: The handling of the radio bearers after the successful completion of the PDCP re-establishment, e.g. the re-transmission of unacknowledged PDCP SDUs (as well as the associated status reporting), the handling of the SN and the HFN, is specified in TS 36.323 [8].

NOTE 2: The UE may discard SRB2 messages and data that it receives prior to completing the reconfiguration used to resume these bearers.

1> else:

2> if the *RRCConnectionReconfiguration* message includes the *radioResourceConfigDedicated*:

3> perform the radio resource configuration procedure as specified in 5.3.10;

NOTE 3: If the *RRCConnectionReconfiguration* message includes the establishment of radio bearers other than SRB1, the UE may start using these radio bearers immediately, i.e. there is no need to wait for an outstanding acknowledgment of the *SecurityModeComplete* message.

1> if the received *RRCConnectionReconfiguration* includes the *sCellToReleaseList*:

2> perform SCell release as specified in 5.3.10.3a;

1> if the received *RRCConnectionReconfiguration* includes the *sCellToAddModList*:

2> perform SCell addition or modification as specified in 5.3.10.3b;

1> if the received *RRCConnectionReconfiguration* includes the *scg-Configuration*; or

1> if the current UE configuration includes one or more split DRBs and the received *RRCConnectionReconfiguration* includes *radioResourceConfigDedicated* including *drb-ToAddModList*:

2> perform SCG reconfiguration as specified in 5.3.10.10;

1> if the received *RRCConnectionReconfiguration* includes the *systemInformationBlockType1Dedicated*:

2> perfom the actions upon reception of the *SystemInformationBlockType1* message as specified in 5.2.2.7;

1> if the *RRCConnectionReconfiguration* message includes the *dedicatedInfoNASList*:

2> forward each element of the *dedicatedInfoNASList* to upper layers in the same order as listed;

1> if the *RRCConnectionReconfiguration* message includes the *measConfig*:

2> perform the measurement configuration procedure as specified in 5.5.2;

1> perform the measurement identity autonomous removal as specified in 5.5.2.2a;

1> if the *RRCConnectionReconfiguration* message includes the *otherConfig*:

2> perform the other configuration procedure as specified in 5.3.10.9;

1> if the *RRCConnectionReconfiguration* message includes the *sl-DiscConfig* or *sl-CommConfig*:

DAINGEAN_0001875

2> perform the sidelink dedicated configuration procedure as specified in 5.3.10.15;

1> if the *RRCConnectionReconfiguration* message includes *wlan-OffloadInfo*:

2> perform the dedicated WLAN offload configuration procedure as specified in 5.6.12.2;

1> if the *RRCConnectionReconfiguration* message includes *rclwi-Configuration*:

2> perform the WLAN traffic steering command procedure as specified in 5.6.16.2;

1> if the *RRCConnectionReconfiguration* message includes *lwa-Configuration*:

2> perform the LWA configuration procedure as specified in 5.6.14.2;

1> if the *RRCConnectionReconfiguration* message includes *lwip-Configuration*:

2> perform the LWIP reconfiguration procedure as specified in 5.6.17.2;

1> submit the *RRCConnectionReconfigurationComplete* message to lower layers for transmission using the new configuration, upon which the procedure ends;

5.3.5.4 Reception of an *RRCConnectionReconfiguration* including the *mobilityControlInfo* by the UE (handover)

If the *RRCConnectionReconfiguration* message includes the *mobilityControlInfo* and the UE is able to comply with the configuration included in this message, the UE shall:

1> stop timer T310, if running;

1> stop timer T312, if running;

1> start timer T304 with the timer value set to *t304,* as included in the *mobilityControlInfo*;

1> stop timer T370, if running;

1> if the *carrierFreq* is included:

2> consider the target PCell to be one on the frequency indicated by the *carrierFreq* with a physical cell identity indicated by the *targetPhysCellId*;

1> else:

2> consider the target PCell to be one on the frequency of the source PCell with a physical cell identity indicated by the *targetPhysCellId*;

1> start synchronising to the DL of the target PCell;

NOTE 1: The UE should perform the handover as soon as possible following the reception of the RRC message triggering the handover, which could be before confirming successful reception (HARQ and ARQ) of this message.

1> if BL UE or UE in CE:

2> acquire the *MasterInformationBlock* in the target PCell;

1> reset MCG MAC and SCG MAC, if configured;

1> re-establish PDCP for all RBs that are established;

NOTE 2: The handling of the radio bearers after the successful completion of the PDCP re-establishment, e.g. the re-transmission of unacknowledged PDCP SDUs (as well as the associated status reporting), the handling of the SN and the HFN, is specified in TS 36.323 [8].

1> re-establish MCG RLC and SCG RLC, if configured, for all RBs that are established;

1> configure lower layers to consider the SCell(s) other than the PSCell, if configured, to be in deactivated state;

DAINGEAN_0001876

1> apply the value of the *newUE-Identity* as the C-RNTI;

1> if the *RRCConnectionReconfiguration* message includes the *fullConfig*:

2> perform the radio configuration procedure as specified in 5.3.5.8;

1> configure lower layers in accordance with the received *radioResourceConfigCommon*;

1> configure lower layers in accordance with any additional fields, not covered in the previous, if included in the received *mobilityControlInfo*;

1> if the received *RRCConnectionReconfiguration* includes the *sCellToReleaseList*:

2> perform SCell release as specified in 5.3.10.3a;

1> if the received *RRCConnectionReconfiguration* includes the *scg-Configuration*; or

1> if the current UE configuration includes one or more split DRBs and the received *RRCConnectionReconfiguration* includes *radioResourceConfigDedicated* including *drb-ToAddModList*:

2> perform SCG reconfiguration as specified in 5.3.10.10;

1> if the *RRCConnectionReconfiguration* message includes the *radioResourceConfigDedicated*:

2> perform the radio resource configuration procedure as specified in 5.3.10;

1> if the *keyChangeIndicator* received in the *securityConfigHO* is set to *TRUE*:

2> update the K_{eNB} key based on the K_{ASME} key taken into use with the latest successful NAS SMC procedure, as specified in TS 33.401 [32];

1> else:

2> update the K_{eNB} key based on the current K_{eNB} or the NH, using the *nextHopChainingCount* value indicated in the *securityConfigHO*, as specified in TS 33.401 [32];

1> store the *nextHopChainingCount* value;

1> if the *securityAlgorithmConfig* is included in the *securityConfigHO*:

2> derive the K_{RRCint} key associated with the *integrityProtAlgorithm*, as specified in TS 33.401 [32];

2> if connected as an RN:

3> derive the K_{UPint} key associated with the *integrityProtAlgorithm*, as specified in TS 33.401 [32];

2> derive the K_{RRCenc} key and the K_{UPenc} key associated with the *cipheringAlgorithm*, as specified in TS 33.401 [32];

1> else:

2> derive the K_{RRCint} key associated with the current integrity algorithm, as specified in TS 33.401 [32];

2> if connected as an RN:

3> derive the K_{UPint} key associated with the current integrity algorithm, as specified in TS 33.401 [32];

2> derive the K_{RRCenc} key and the K_{UPenc} key associated with the current ciphering algorithm, as specified in TS 33.401 [32];

1> configure lower layers to apply the integrity protection algorithm and the K_{RRCint} key, i.e. the integrity protection configuration shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

1> configure lower layers to apply the ciphering algorithm, the K_{RRCenc} key and the K_{UPenc} key, i.e. the ciphering configuration shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

DAINGEAN_0001877

1> if connected as an RN:

2> configure lower layers to apply the integrity protection algorithm and the K_{UPint} key, for current or subsequently established DRBs that are configured to apply integrity protection, if any;

1> if the received *RRCConnectionReconfiguration* includes the s*CellToAddModList*:

2> perform SCell addition or modification as specified in 5.3.10.3b;

1> if the received *RRCConnectionReconfiguration* includes the *systemInformationBlockType1Dedicated*:

2> perfom the actions upon reception of the *SystemInformationBlockType1* message as specified in 5.2.2.7;

1> perform the measurement related actions as specified in 5.5.6.1;

1> if the *RRCConnectionReconfiguration* message includes the *measConfig*:

2> perform the measurement configuration procedure as specified in 5.5.2;

1> perform the measurement identity autonomous removal as specified in 5.5.2.2a;

1> release *reportProximityConfig* and clear any associated proximity status reporting timer;

1> if the *RRCConnectionReconfiguration* message includes the *otherConfig*:

2> perform the other configuration procedure as specified in 5.3.10.9;

1> if the *RRCConnectionReconfiguration* message includes the *sl-DiscConfig* or *sl-CommConfig*:

2> perform the sidelink dedicated configuration procedure as specified in 5.3.10.15;

1> if the *RRCConnectionReconfiguration* message includes *wlan-OffloadInfo*:

2> perform the dedicated WLAN offload configuration procedure as specified in 5.6.12.2;

1> release the LWA configuration, if configured, as described in 5.6.14.3;

1> release the LWIP configuration, if configured, as described in 5.6.17.3;

1> if the *RRCConnectionReconfiguration* message includes *rclwi-Configuration*:

2> perform the WLAN traffic steering command procedure as specified in 5.6.16.2;

1> if the *RRCConnectionReconfiguration* message includes *lwa-Configuration*:

2> perform the LWA configuration procedure as specified in 5.6.14.2;

1> if the *RRCConnectionReconfiguration* message includes *lwip-Configuration*:

2> perform the LWIP reconfiguration procedure as specified in 5.6.17.2;

1> set the content of *RRCConnectionReconfigurationComplete* message as follows:

2> if the UE has radio link failure or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

3> include *rlf-InfoAvailable*;

2> if the UE has MBSFN logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport* and if T330 is not running:

3> include *logMeasAvailableMBSFN*;

2> else if the UE has logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

3> include the *logMeasAvailable*;

DAINGEAN_0001878

2> if the UE has connection establishment failure information available in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

3> include *connEstFailInfoAvailable*;

1> submit the *RRCConnectionReconfigurationComplete* message to lower layers for transmission;

1> if MAC successfully completes the random access procedure:

2> stop timer T304;

2> apply the parts of the CQI reporting configuration, the scheduling request configuration and the sounding RS configuration that do not require the UE to know the SFN of the target PCell, if any;

2> apply the parts of the measurement and the radio resource configuration that require the UE to know the SFN of the target PCell (e.g. measurement gaps, periodic CQI reporting, scheduling request configuration, sounding RS configuration), if any, upon acquiring the SFN of the target PCell;

NOTE 3: Whenever the UE shall setup or reconfigure a configuration in accordance with a field that is received it applies the new configuration, except for the cases addressed by the above statements.

2> if the UE is configured to provide IDC indications:

3> if the UE has transmitted an *InDeviceCoexIndication* message during the last 1 second preceding reception of the *RRCConnectionReconfiguration* message including *mobilityControlInfo*:

4> initiate transmission of the *InDeviceCoexIndication* message in accordance with 5.6.9.3;

2> if the UE is configured to provide power preference indications:

3> if the UE has transmitted a *UEAssistanceInformation* message during the last 1 second preceding reception of the *RRCConnectionReconfiguration* message including *mobilityControlInfo*:

4> initiate transmission of the *UEAssistanceInformation* message in accordance with 5.6.10.3;

2> if *SystemInformationBlockType15* is broadcast by the PCell:

3> if the UE has transmitted a *MBMSInterestIndication* message during the last 1 second preceding reception of the *RRCConnectionReconfiguration* message including *mobilityControlInfo*:

4> ensure having a valid version of *SystemInformationBlockType15* for the PCell;

4> determine the set of MBMS frequencies of interest in accordance with 5.8.5.3;

4> determine the set of MBMS services of interest in accordance with 5.8.5.3a;

4> initiate transmission of the *MBMSInterestIndication* message in accordance with 5.8.5.4;

2> if *SystemInformationBlockType18* is broadcast by the target PCell; and the UE transmitted a *SidelinkUEInformation* message indicating a change of sidelink communication related parameters relevant in target PCell (i.e. change of *commRxInterestedFreq* or *commTxResourceReq*, *commTxResourceReqUC* if *SystemInformationBlockType18* includes *commTxResourceUC-ReqAllowed* or *commTxResourceInfoReqRelay* if PCell broadcasts *SystemInformationBlockType19* including *discConfigRelay*) during the last 1 second preceding reception of the *RRCConnectionReconfiguration* message including *mobilityControlInfo*; or

2> if *SystemInformationBlockType19* is broadcast by the target PCell; and the UE transmitted a *SidelinkUEInformation* message indicating a change of sidelink discovery related parameters relevant in target PCell (i.e. change of *discRxInterest* or *discTxResourceReq*, *discTxResourceReqPS* if *SystemInformationBlockType19* includes *discConfigPS* or *discRxGapReq* or *discTxGapReq* if the UE is configured with *gapRequestsAllowedDedicated* set to *true* or if the UE is not configured with *gapRequestsAllowedDedicated* and *SystemInformationBlockType19* includes *gapRequestsAllowedCommon*) during the last 1 second preceding reception of the *RRCConnectionReconfiguration* message including *mobilityControlInfo*:

3> initiate transmission of the *SidelinkUEInformation* message in accordance with 5.10.2.3;

DAINGEAN_0001879

2> the procedure ends;

NOTE 4: The UE is not required to determine the SFN of the target PCell by acquiring system information from that cell before performing RACH access in the target PCell, except for BL UEs or UEs in CE.

5.3.5.5 Reconfiguration failure

The UE shall:

1> if the UE is unable to comply with (part of) the configuration included in the *RRCConnectionReconfiguration* message:

2> continue using the configuration used prior to the reception of *RRCConnectionReconfiguration* message;

2> if security has not been activated:

3> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause other;

2> else:

3> initiate the connection re-establishment procedure as specified in 5.3.7, upon which the connection reconfiguration procedure ends;

NOTE 1: The UE may apply above failure handling also in case the *RRCConnectionReconfiguration* message causes a protocol error for which the generic error handling as defined in 5.7 specifies that the UE shall ignore the message.

NOTE 2: If the UE is unable to comply with part of the configuration, it does not apply any part of the configuration, i.e. there is no partial success/ failure.

5.3.5.6 T304 expiry (handover failure)

The UE shall:

1> if T304 expires (handover failure):

NOTE 1: Following T304 expiry any dedicated preamble, if provided within the *rach-ConfigDedicated*, is not available for use by the UE anymore.

2> revert back to the configuration used in the source PCell, excluding the configuration configured by the *physicalConfigDedicated*, the *mac-MainConfig* and the *sps-Config*;

2> store the following handover failure information in *VarRLF-Report* by setting its fields as follows:

3> clear the information included in *VarRLF-Report*, if any;

3> set the *plmn-IdentityList* to include the list of EPLMNs stored by the UE (i.e. includes the RPLMN);

3> set the *measResultLastServCell* to include the RSRP and RSRQ, if available, of the source PCell based on measurements collected up to the moment the UE detected handover failure and in accordance with the following;

4> if the UE includes *rsrqResult*, include the *lastServCellRSRQ-Type*;

3> set the *measResultNeighCells* to include the best measured cells, other than the source PCell, ordered such that the best cell is listed first, and based on measurements collected up to the moment the UE detected handover failure, and set its fields as follows;

4> if the UE was configured to perform measurements for one or more EUTRA frequencies, include the *measResultListEUTRA*;

4> if the UE includes *rsrqResult*, include the *rsrq-Type*;

4> if the UE was configured to perform measurement reporting for one or more neighbouring UTRA frequencies, include the *measResultListUTRA*;

DAINGEAN_0001880

4> if the UE was configured to perform measurement reporting for one or more neighbouring GERAN frequencies, include the *measResultListGERAN*;

4> if the UE was configured to perform measurement reporting for one or more neighbouring CDMA2000 frequencies, include the *measResultsCDMA2000*;

4> for each neighbour cell included, include the optional fields that are available;

NOTE 2: The measured quantities are filtered by the L3 filter as configured in the mobility measurement configuration. The measurements are based on the time domain measurement resource restriction, if configured. Blacklisted cells are not required to be reported.

3> if detailed location information is available, set the content of the *locationInfo* as follows:

4> include the *locationCoordinates*;

4> include the *horizontalVelocity*, if available;

3> set the *failedPCellId* to the global cell identity, if available, and otherwise to the physical cell identity and carrier frequency of the target PCell of the failed handover;

3> include *previousPCellId* and set it to the global cell identity of the PCell where the last *RRCConnectionReconfiguration* message including *mobilityControlInfo* was received;

3> set the *timeConnFailure* to the elapsed time since reception of the last *RRCConnectionReconfiguration* message including the *mobilityControlInfo*;

3> set the *connectionFailureType* to '*hof*';

3> set the *c-RNTI* to the C-RNTI used in the source PCell;

2> initiate the connection re-establishment procedure as specified in 5.3.7, upon which the RRC connection reconfiguration procedure ends;

The UE may discard the handover failure information, i.e. release the UE variable *VarRLF-Report,* 48 hours after the failure is detected, upon power off or upon detach.

NOTE 3: E-UTRAN may retrieve the handover failure information using the UE information procedure with *rlf-ReportReq* set to *true*, as specified in 5.6.5.3.

5.3.5.7 Void

5.3.5.7a T307 expiry (SCG change failure)

The UE shall:

1> if T307 expires:

NOTE 1: Following T307 expiry any dedicated preamble, if provided within the *rach-ConfigDedicatedSCG*, is not available for use by the UE anymore.

2> initiate the SCG failure information procedure as specified in 5.6.13 to report SCG change failure;

5.3.5.8 Radio Configuration involving full configuration option

The UE shall:

1> release/ clear all current dedicated radio configurations except the MCG C-RNTI, the MCG security configuration and the PDCP, RLC, logical channel configurations for the RBs and the logged measurement configuration;

NOTE 1: Radio configuration is not just the resource configuration but includes other configurations like *MeasConfig* and *OtherConfig*.

1> if the *RRCConnectionReconfiguration* message includes the *mobilityControlInfo*:

DAINGEAN_0001881

2> release/ clear all current common radio configurations;

2> use the default values specified in 9.2.5 for timer T310, T311 and constant N310, N311;

1> else:

2> use values for timers T301, T310, T311 and constants N310, N311, as included in *ue-TimersAndConstants* received in *SystemInformationBlockType2*;

1> apply the default physical channel configuration as specified in 9.2.4;

1> apply the default semi-persistent scheduling configuration as specified in 9.2.3;

1> apply the default MAC main configuration as specified in 9.2.2;

1> for each *srb-Identity* value included in the *srb-ToAddModList* (SRB reconfiguration):

2> apply the specified configuration defined in 9.1.2 for the corresponding SRB;

2> apply the corresponding default RLC configuration for the SRB specified in 9.2.1.1 for SRB1 or in 9.2.1.2 for SRB2;

2> apply the corresponding default logical channel configuration for the SRB as specified in 9.2.1.1 for SRB1 or in 9.2.1.2 for SRB2;

NOTE 2: This is to get the SRBs (SRB1 and SRB2 for handover and SRB2 for reconfiguration after reestablishment) to a known state from which the reconfiguration message can do further configuration.

1> for each *eps-BearerIdentity* value included in the *drb-ToAddModList* that is part of the current UE configuration:

2> release the PDCP entity;

2> release the RLC entity or entities;

2> release the DTCH logical channel;

2> release the *drb-identity*;

NOTE 3: This will retain the *eps-bearerIdentity* but remove the DRBs including *drb-identity* of these bearers from the current UE configuration and trigger the setup of the DRBs within the AS in Section 5.3.10.3 using the new configuration. The *eps-bearerIdentity* acts as the anchor for associating the released and re-setup DRB.

1> for each *eps-BearerIdentity* value that is part of the current UE configuration but not part of the *drb-ToAddModList:*

2> perform DRB release as specified in 5.3.10.2;

DAINGEAN_0001882

5.3.6 Counter check

5.3.6.1 General

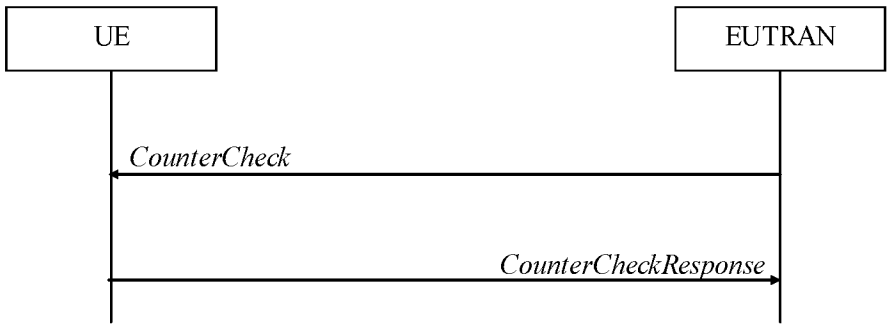


Figure 5.3.6.1-1: Counter check procedure

The counter check procedure is used by E-UTRAN to request the UE to verify the amount of data sent/ received on each DRB. More specifically, the UE is requested to check if, for each DRB, the most significant bits of the COUNT match with the values indicated by E-UTRAN.

NOTE: The procedure enables E-UTRAN to detect packet insertion by an intruder (a 'man in the middle').

5.3.6.2 Initiation

E-UTRAN initiates the procedure by sending a *CounterCheck* message.

NOTE: E-UTRAN may initiate the procedure when any of the COUNT values reaches a specific value.

5.3.6.3 Reception of the *CounterCheck* message by the UE

Upon receiving the *CounterCheck* message, the UE shall:

1> for each DRB that is established:

2> if no COUNT exists for a given direction (uplink or downlink) because it is a uni-directional bearer configured only for the other direction:

3> assume the COUNT value to be 0 for the unused direction;

2> if the *drb-Identity* is not included in the *drb-CountMSB-InfoList*:

3> include the DRB in the *drb-CountInfoList* in the *CounterCheckResponse* message by including the *drb-Identity*, the *count-Uplink* and the *count-Downlink* set to the value of the corresponding COUNT;

2> else if, for at least one direction, the most significant bits of the COUNT are different from the value indicated in the *drb-CountMSB-InfoList*:

3> include the DRB in the *drb-CountInfoList* in the *CounterCheckResponse* message by including the *drb-Identity*, the *count-Uplink* and the *count-Downlink* set to the value of the corresponding COUNT;

1> for each DRB that is included in the *drb-CountMSB-InfoList* in the *CounterCheck* message that is not established:

2> include the DRB in the *drb-CountInfoList* in the *CounterCheckResponse* message by including the *drb-Identity*, the *count-Uplink* and the *count-Downlink* with the most significant bits set identical to the corresponding values in the *drb-CountMSB-InfoList* and the least significant bits set to zero;

1> submit the *CounterCheckResponse* message to lower layers for transmission upon which the procedure ends;

DAINGEAN_0001883

5.3.7 RRC connection re-establishment

5.3.7.1 General

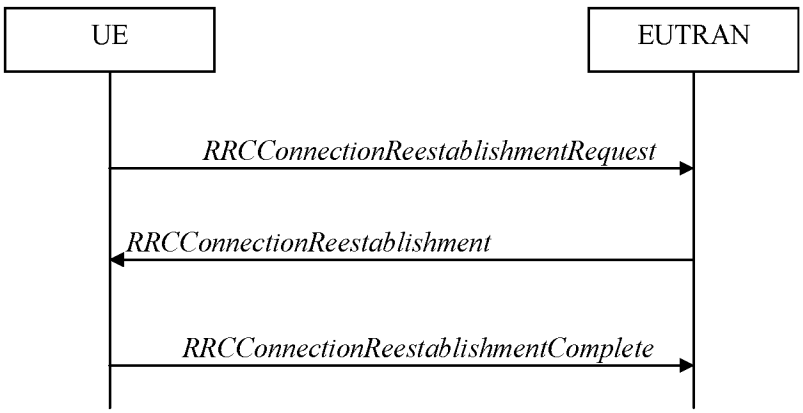


Figure 5.3.7.1-1: RRC connection re-establishment, successful

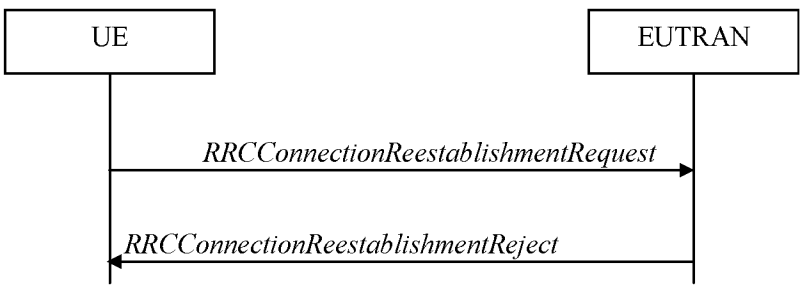


Figure 5.3.7.1-2: RRC connection re-establishment, failure

The purpose of this procedure is to re-establish the RRC connection, which involves the resumption of SRB1 operation, the re-activation of security and the configuration of only the PCell.

A UE in RRC_CONNECTED, for which security has been activated, may initiate the procedure in order to continue the RRC connection. The connection re-establishment succeeds only if the concerned cell is prepared i.e. has a valid UE context. In case E-UTRAN accepts the re-establishment, SRB1 operation resumes while the operation of other radio bearers remains suspended. If AS security has not been activated, the UE does not initiate the procedure but instead moves to RRC_IDLE directly.

E-UTRAN applies the procedure as follows:

- to reconfigure SRB1 and to resume data transfer only for this RB;
- to re-activate AS security without changing algorithms.

5.3.7.2 Initiation

The UE shall only initiate the procedure when AS security has been activated. The UE initiates the procedure when one of the following conditions is met:

1> upon detecting radio link failure, in accordance with 5.3.11; or

1> upon handover failure, in accordance with 5.3.5.6; or

1> upon mobility from E-UTRA failure, in accordance with 5.4.3.5; or

1> upon integrity check failure indication from lower layers; or

DAINGEAN_0001884

1> upon an RRC connection reconfiguration failure, in accordance with 5.3.5.5;

Upon initiation of the procedure, the UE shall:

1> stop timer T310, if running;

1> stop timer T312, if running;

1> stop timer T313, if running;

1> stop timer T307, if running;

1> start timer T311;

1> stop timer T370, if running;

1> suspend all RBs except SRB0;

1> reset MAC;

1> release the MCG SCell(s), if configured, in accordance with 5.3.10.3a;

1> apply the default physical channel configuration as specified in 9.2.4;

1> except for NB-IoT, for the MCG, apply the default semi-persistent scheduling configuration as specified in 9.2.3;

1> for the MCG, apply the default MAC main configuration as specified in 9.2.2;

1> release *powerPrefIndicationConfig*, if configured and stop timer T340, if running;

1> release *reportProximityConfig*, if configured and clear any associated proximity status reporting timer;

1> release *obtainLocationConfig*, if configured;

1> release *idc-Config*, if configured;

1> release *measSubframePatternPCell*, if configured;

1> release the entire SCG configuration, if configured, except for the DRB configuration (as configured by *drb-ToAddModListSCG*);

1> release *naics-Info* for the PCell, if configured;

1> if connected as an RN and configured with an RN subframe configuration:

2> release the RN subframe configuration;

1> release the LWA configuration, if configured, as described in 5.6.14.3;

1> release the LWIP configuration, if configured, as described in 5.6.17.3;

1> perform cell selection in accordance with the cell selection process as specified in TS 36.304 [4];

5.3.7.3 Actions following cell selection while T311 is running

Upon selecting a suitable E-UTRA cell, the UE shall:

1> stop timer T311;

1> start timer T301;

1> apply the *timeAlignmentTimerCommon* included in *SystemInformationBlockType2*;

1> initiate transmission of the *RRCConnectionReestablishmentRequest* message in accordance with 5.3.7.4;

NOTE: This procedure applies also if the UE returns to the source PCell.

Upon selecting an inter-RAT cell, the UE shall:

DAINGEAN_0001885

1> if the selected cell is a UTRA cell, and if the UE supports Radio Link Failure Report for Inter-RAT MRO, include *selectedUTRA-CellId* in the *VarRLF-Report* and set it to the physical cell identity and carrier frequency of the selected UTRA cell;

1> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC connection failure';

5.3.7.4 Actions related to transmission of *RRCConnectionReestablishmentRequest* message

Except for NB-IoT, if the procedure was initiated due to radio link failure or handover failure, the UE shall:

1> set the *reestablishmentCellId* in the *VarRLF-Report* to the global cell identity of the selected cell;

The UE shall set the contents of *RRCConnectionReestablishmentRequest* message as follows:

1> set the *ue-Identity* as follows:

2> set the *c-RNTI* to the C-RNTI used in the source PCell (handover and mobility from E-UTRA failure) or used in the PCell in which the trigger for the re-establishment occurred (other cases);

2> set the *physCellId* to the physical cell identity of the source PCell (handover and mobility from E-UTRA failure) or of the PCell in which the trigger for the re-establishment occurred (other cases);

2> set the *shortMAC-I* to the 16 least significant bits of the MAC-I calculated:

3> over the ASN.1 encoded as per section 8 (i.e., a multiple of 8 bits) *VarShortMAC-Input* (or *VarShortMAC-Input-NB* in NB-IoT);

3> with the K_{RRCint} key and integrity protection algorithm that was used in the source PCell (handover and mobility from E-UTRA failure) or of the PCell in which the trigger for the re-establishment occurred (other cases); and

3> with all input bits for COUNT, BEARER and DIRECTION set to binary ones;

1> set the *reestablishmentCause* as follows:

2> if the re-establishment procedure was initiated due to reconfiguration failure as specified in 5.3.5.5 (the UE is unable to comply with the reconfiguration):

3> set the *reestablishmentCause* to the value *reconfigurationFailure*;

2> else if the re-establishment procedure was initiated due to handover failure as specified in 5.3.5.6 (intra-LTE handover failure) or 5.4.3.5 (inter-RAT mobility from EUTRA failure):

3> set the *reestablishmentCause* to the value *handoverFailure*;

2> else:

3> set the *reestablishmentCause* to the value *otherFailure*;

The UE shall submit the *RRCConnectionReestablishmentRequest* message to lower layers for transmission.

5.3.7.5 Reception of the *RRCConnectionReestablishment* by the UE

NOTE 1: Prior to this, lower layer signalling is used to allocate a C-RNTI. For further details see TS 36.321 [6];

The UE shall:

1> stop timer T301;

1> consider the current cell to be the PCell;

1> re-establish PDCP for SRB1;

1> re-establish RLC for SRB1;

DAINGEAN_0001886

1> perform the radio resource configuration procedure in accordance with the received *radioResourceConfigDedicated* and as specified in 5.3.10;

1> resume SRB1;

NOTE 2: E-UTRAN should not transmit any message on SRB1 prior to receiving the *RRCConnectionReestablishmentComplete* message.

1> update the K_{eNB} key based on the K_{ASME} key to which the current K_{eNB} is associated, using the *nextHopChainingCount* value indicated in the *RRCConnectionReestablishment* message, as specified in TS 33.401 [32];

1> store the *nextHopChainingCount* value;

1> derive the K_{RRCint} key associated with the previously configured integrity algorithm, as specified in TS 33.401 [32];

1> derive the K_{RRCenc} key and the K_{UPenc} key associated with the previously configured ciphering algorithm, as specified in TS 33.401 [32];

1> if connected as an RN:

2> derive the K_{UPint} key associated with the previously configured integrity algorithm, as specified in TS 33.401 [32];

1> configure lower layers to activate integrity protection using the previously configured algorithm and the K_{RRCint} key immediately, i.e., integrity protection shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

1> if connected as an RN:

2> configure lower layers to apply integrity protection using the previously configured algorithm and the K_{UPint} key, for subsequently resumed or subsequently established DRBs that are configured to apply integrity protection, if any;

1> configure lower layers to apply ciphering using the previously configured algorithm, the K_{RRCenc} key and the K_{UPenc} key immediately, i.e., ciphering shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

1> if the UE is not a NB-IoT UE:

2> set the content of *RRCConnectionReestablishmentComplete* message as follows:

3> if the UE has radio link failure or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

4> include the *rlf-InfoAvailable*;

3> if the UE has MBSFN logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport* and if T330 is not running:

4> include *logMeasAvailableMBSFN*;

3> else if the UE has logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

4> include the *logMeasAvailable*;

3> if the UE has connection establishment failure information available in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

4> include the *connEstFailInfoAvailable*;

2> perform the measurement related actions as specified in 5.5.6.1;

2> perform the measurement identity autonomous removal as specified in 5.5.2.2a;

DAINGEAN_0001887

1> submit the *RRCConnectionReestablishmentComplete* message to lower layers for transmission;

1> if *SystemInformationBlockType15* is broadcast by the PCell:

2> if the UE has transmitted an *MBMSInterestIndication* message during the last 1 second preceding detection of radio link failure:

3> ensure having a valid version of *SystemInformationBlockType15* for the PCell;

3> determine the set of MBMS frequencies of interest in accordance with 5.8.5.3;

3> determine the set of MBMS services of interest in accordance with 5.8.5.3a;

3> initiate transmission of the *MBMSInterestIndication* message in accordance with 5.8.5.4;

1> if *SystemInformationBlockType18* is broadcast by the PCell; and the UE transmitted a *SidelinkUEInformation* message indicating a change of sidelink communication related parameters relevant in PCell (i.e. change of *commRxInterestedFreq* or *commTxResourceReq*, *commTxResourceReqUC* if *SystemInformationBlockType18* includes *commTxResourceUC-ReqAllowed* or *commTxResourceInfoReqRelay* if PCell broadcasts *SystemInformationBlockType19* including *discConfigRelay*) during the last 1 second preceding detection of radio link failure; or

1> if *SystemInformationBlockType19* is broadcast by the PCell; and the UE transmitted a *SidelinkUEInformation* message indicating a change of sidelink discovery related parameters relevant in PCell (i.e. change of *discRxInterest* or *discTxResourceReq*, *discTxResourceReqPS* if *SystemInformationBlockType19* includes *discConfigPS* or *discRxGapReq* or *discTxGapReq* if the UE is configured with *gapRequestsAllowedDedicated* set to *true* or if the UE is not configured with *gapRequestsAllowedDedicated* and *SystemInformationBlockType19* includes *gapRequestsAllowedCommon*) during the last 1 second preceding detection of radio link failure:

2> initiate transmission of the *SidelinkUEInformation* message in accordance with 5.10.2.3;

1> the procedure ends;

5.3.7.6 T311 expiry

Upon T311 expiry, the UE shall:

1> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC connection failure';

5.3.7.7 T301 expiry or selected cell no longer suitable

The UE shall:

1> if timer T301 expires; or

1> if the selected cell becomes no longer suitable according to the cell selection criteria as specified in TS 36.304 [4]:

2> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC connection failure';

5.3.7.8 Reception of *RRCConnectionReestablishmentReject* by the UE

Upon receiving the *RRCConnectionReestablishmentReject* message, the UE shall:

1> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC connection failure';

DAINGEAN_0001888

5.3.8 RRC connection release

5.3.8.1 General



Figure 5.3.8.1-1: RRC connection release, successful

The purpose of this procedure is:

- to release the RRC connection, which includes the release of the established radio bearers as well as all radio resources;

or:

- to suspend the RRC connection, which includes the suspension of the established radio bearers.

5.3.8.2 Initiation

E-UTRAN initiates the RRC connection release procedure to a UE in RRC_CONNECTED.

5.3.8.3 Reception of the *RRCConnectionRelease* by the UE

The UE shall:

1> delay the following actions defined in this sub-clause 60 ms from the moment the *RRCConnectionRelease* message was received or optionally when lower layers indicate that the receipt of the *RRCConnectionRelease* message has been successfully acknowledged, whichever is earlier;

1> if the *RRCConnectionRelease* message includes the *idleModeMobilityControlInfo*:

2> store the cell reselection priority information provided by the *idleModeMobilityControlInfo*;

2> if the *t320* is included:

3> start timer T320, with the timer value set according to the value of *t320*;

1> else:

2> apply the cell reselection priority information broadcast in the system information;

1> if the *releaseCause* received in the *RRCConnectionRelease* message indicates *loadBalancingTAURequired*:

2> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'load balancing TAU required';

1> else if the *releaseCause* received in the *RRCConnectionRelease* message indicates *cs-FallbackHighPriority*:

2> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'CS Fallback High Priority';

1> else:

2> if the *extendedWaitTime* is present; and

2> if the UE supports delay tolerant access or the UE is a NB-IoT UE:

3> forward the *extendedWaitTime* to upper layers;

DAINGEAN_0001889

2> if the *releaseCause* received in the *RRCConnectionRelease* message indicates *rrc-Suspend*:

3> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC suspension';

2> else:

3> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'other';

5.3.8.4 T320 expiry

The UE shall:

1> if T320 expires:

2> if stored, discard the cell reselection priority information provided by the *idleModeMobilityControlInfo* or inherited from another RAT;

2> apply the cell reselection priority information broadcast in the system information;

5.3.9 RRC connection release requested by upper layers

5.3.9.1 General

The purpose of this procedure is to release the RRC connection. Access to the current PCell may be barred as a result of this procedure.

NOTE: Upper layers invoke the procedure, e.g. upon determining that the network has failed an authentication check, see TS 24.301 [35].

5.3.9.2 Initiation

The UE initiates the procedure when upper layers request the release of the RRC connection. The UE shall not initiate the procedure for power saving purposes.

The UE shall:

1> if the upper layers indicate barring of the PCell:

2> treat the PCell used prior to entering RRC_IDLE as barred according to TS 36.304 [4];

1> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'other';

5.3.10 Radio resource configuration

5.3.10.0 General

The UE shall:

1> if the received *radioResourceConfigDedicated* includes the *srb-ToAddModList*:

2> perform the SRB addition or reconfiguration as specified in 5.3.10.1;

1> if the received *radioResourceConfigDedicated* includes the *drb-ToReleaseList*:

2> perform DRB release as specified in 5.3.10.2;

1> if the received *radioResourceConfigDedicated* includes the *drb-ToAddModList*:

2> perform DRB addition or reconfiguration as specified in 5.3.10.3;

1> if the received *radioResourceConfigDedicated* includes the *mac-MainConfig*:

DAINGEAN_0001890

2> perform MAC main reconfiguration as specified in 5.3.10.4;

1> if the received *radioResourceConfigDedicated* includes *sps-Config*:

2> perform SPS reconfiguration according to 5.3.10.5;

1> if the received *radioResourceConfigDedicated* includes the *physicalConfigDedicated*:

2> reconfigure the physical channel configuration as specified in 5.3.10.6.

1> if the received *radioResourceConfigDedicated* includes the *rlf-TimersAndConstants*:

2> reconfigure the values of timers and constants as specified in 5.3.10.7;

1> if the received *radioResourceConfigDedicated* includes the *measSubframePatternPCell*:

2> reconfigure the time domain measurement resource restriction for the serving cell as specified in 5.3.10.8;

1> if the received *radioResourceConfigDedicated* includes the *naics-Info*:

2> perform NAICS neighbour cell information reconfiguration for the PCell as specified in 5.3.10.13;

1> if the received *RadioResourceConfigDedicatedPSCell* includes the *naics-Info*:

2> perform NAICS neighbour cell information reconfiguration for the PSCell as specified in 5.3.10.13;

1> if the received *RadioResourceConfigDedicatedSCell-r10* includes the *naics-Info*:

2> perform NAICS neighbour cell information reconfiguration for the SCell as specified in 5.3.10.13;

5.3.10.1 SRB addition/ modification

The UE shall:

1> if the UE is a NB-IoT UE and SRB1 is not established; or

1> for each *srb-Identity* value included in the *srb-ToAddModList* that is not part of the current UE configuration (SRB establishment):

2> apply the specified configuration defined in 9.1.2 for the corresponding SRB;

2> establish a PDCP entity and configure it with the current (MCG) security configuration, if applicable;

2> establish an (MCG) RLC entity in accordance with the received *rlc-Config*;

2> establish a (MCG) DCCH logical channel in accordance with the received *logicalChannelConfig* and with the logical channel identity set in accordance with 9.1.2;

2> if the UE is a NB-IoT UE:

3> apply the specified configuration defined in 9.1.2 for SRB1bis;

3> establish an (MCG) RLC entity in accordance with the received *rlc-Config*;

3> establish a (MCG) DCCH logical channel in accordance with the received *logicalChannelConfig* and with the logical channel identity set in accordance with 9.1.2.1a;

1> if the UE is a NB-IoT UE and SRB1 is established; or

1> for each *srb-Identity* value included in the *srb-ToAddModList* that is part of the current UE configuration (SRB reconfiguration):

2> reconfigure the RLC entity in accordance with the received *rlc-Config*;

2> reconfigure the DCCH logical channel in accordance with the received *logicalChannelConfig*;

DAINGEAN_0001891

5.3.10.2 DRB release

The UE shall:

1> for each *drb-Identity* value included in the *drb-ToReleaseList* that is part of the current UE configuration (DRB release); or

1> for each *drb-identity* value that is to be released as the result of full configuration option according to 5.3.5.8:

2> release the PDCP entity;

2> release the RLC entity or entities;

2> release the DTCH logical channel;

1> if the procedure was triggered due to handover:

2> indicate the release of the DRB(s) and the *eps-BearerIdentity* of the released DRB(s) to upper layers after successful handover;

1> else:

2> indicate the release of the DRB(s) and the *eps-BearerIdentity* of the released DRB(s) to upper layers immediately.

NOTE: The UE does not consider the message as erroneous if the *drb-ToReleaseList* includes any *drb-Identity* value that is not part of the current UE configuration.

5.3.10.3 DRB addition/ modification

The UE shall:

1> for each *drb-Identity* value included in the *drb-ToAddModList* that is not part of the current UE configuration (DRB establishment including the case when full configuration option is used):

2> if the concerned entry of *drb-ToAddModList* includes the *drb-TypeLWA* set to *TRUE* (i.e. add LWA DRB):

3> perform the LWA specific DRB addition or reconfiguration as specified in 5.3.10.3a2;

2> if the concerned entry of *drb-ToAddModList* includes the *drb-TypeLWIP* (i.e. add LWIP DRB):

3> perform LWIP specific DRB addition or reconfiguration as specified in 5.3.10.3a3;

2> else if *drb-ToAddModListSCG* is not received or does not include the *drb-Identity* value (i.e. add MCG DRB):

3> establish a PDCP entity and configure it with the current MCG security configuration and in accordance with the received *pdcp-Config*;

3> establish an MCG RLC entity or entities in accordance with the received rlc-Config;

3> establish an MCG DTCH logical channel in accordance with the received *logicalChannelIdentity* and the received *logicalChannelConfig*;

2> if the *RRCConnectionReconfiguration* message includes the *fullConfig* IE:

3> associate the established DRB with corresponding included *eps-BearerIdentity*;

2> else:

3> indicate the establishment of the DRB(s) and the *eps-BearerIdentity* of the established DRB(s) to upper layers;

1> for each *drb-Identity* value included in the *drb-ToAddModList* that is part of the current UE configuration (DRB reconfiguration):

2> if the DRB indicated by *drb-Identity* is an LWA DRB (i.e. LWA to LTE only or reconfigure LWA DRB):

DAINGEAN_0001892

3> perform the LWA specific DRB reconfiguration as specified in 5.3.10.3a2;

2> else if the concerned entry of *drb-ToAddModList* includes the *drb-TypeLWA* set to *TRUE* (i.e. LTE only to LWA DRB):

3> perform the LWA specific DRB reconfiguration as specified in 5.3.10.3a2;

2> if the concerned entry of *drb-ToAddModList* includes the *drb-TypeLWIP* (i.e. add or reconfigure LWIP DRB):

3> perform LWIP specific DRB addition or reconfiguration as specified in 5.3.10.3a3;

2> if *drb-ToAddModListSCG* is not received or does not include the *drb-Identity* value:

3> if the DRB indicated by *drb-Identity* is an MCG DRB (reconfigure MCG):

4> if the *pdcp-Config* is included:

5> reconfigure the PDCP entity in accordance with the received *pdcp-Config*;

4> if the *rlc-Config* is included:

5> reconfigure the RLC entity or entities in accordance with the received *rlc-Config*;

4> if the *logicalChannelConfig* is included:

5> reconfigure the DTCH logical channel in accordance with the received *logicalChannelConfig*;

NOTE: Removal and addition of the same *drb-Identity* in a single *radioResourceConfigDedicated* is not supported. In case *drb-Identity* is removed and added due to handover or re-establishment with the full configuration option, the eNB can use the same value of *drb-Identity*.

5.3.10.3a1 DC specific DRB addition or reconfiguration

For the *drb-Identity* value for which this procedure is initiated, the UE shall:

1> if *drb-ToAddModListSCG* is received and includes the *drb-Identity* value; and *drb-Identity* value is not part of the current UE configuration (i.e. DC specific DRB establishment):

2> if *drb-ToAddModList* is received and includes the *drb-Identity* value (i.e. add split DRB):

3> establish a PDCP entity and configure it with the current MCG security configuration and in accordance with the *pdcp-Config* included in *drb-ToAddModList*;

3> establish an MCG RLC entity and an MCG DTCH logical channel in accordance with the *rlc-Config*, *logicalChannelIdentity* and *logicalChannelConfig* included in *drb-ToAddModList*;

3> establish an SCG RLC entity and an SCG DTCH logical channel in accordance with the *rlc-ConfigSCG*, *logicalChannelIdentitySCG* and *logicalChannelConfigSCG* included in *drb-ToAddModListSCG*;

2> else (i.e. add SCG DRB):

3> establish a PDCP entity and configure it with the current SCG security configuration and in accordance with the *pdcp-Config* included in *drb-ToAddModListSCG*;

3> establish an SCG RLC entity or entities and an SCG DTCH logical channel in accordance with the *rlc-ConfigSCG*, *logicalChannelIdentitySCG* and *logicalChannelConfigSCG* included in *drb-ToAddModListSCG*;

2> indicate the establishment of the DRB(s) and the *eps-BearerIdentity* of the established DRB(s) to upper layers;

1> else (i.e. DC specific DRB modification; *drb-ToAddModList* and/ or *drb-ToAddModListSCG* received):

2> if the DRB indicated by *drb-Identity* is a split DRB:

DAINGEAN_0001893

3> if *drb-ToAddModList* is received and includes the *drb-Identity* value, while for this entry *drb-TypeChange* is included and set to *toMCG* (i.e. split to MCG):

4> release the SCG RLC entity and the SCG DTCH logical channel;

4> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

4> reconfigure the MCG RLC entity and/ or the MCG DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

3> else (i.e. reconfigure split):

4> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

4> reconfigure the MCG RLC entity and/ or the MCG DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

4> reconfigure the SCG RLC entity and/ or the SCG DTCH logical channel in accordance with the *rlc-ConfigSCG* and *logicalChannelConfigSCG*, if included in *drb-ToAddModListSCG*;

2> if the DRB indicated by *drb-Identity* is an SCG DRB:

3> if *drb-ToAddModList* is received and includes the *drb-Identity* value, while for this entry *drb-TypeChange* is included and set to *toMCG* (i.e. SCG to MCG):

4> reconfigure the PDCP entity with the current MCG security configuration and in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

4> reconfigure the SCG RLC entity or entities and the SCG DTCH logical channel to be an MCG RLC entity or entities and an MCG DTCH logical channel;

4> reconfigure the MCG RLC entity or entities and/ or the MCG DTCH logical channel in accordance with the *rlc-Config, logicalChannelIdentity* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

3> else (i.e. *drb-ToAddModListSCG* is received and includes the *drb-Identity* value i.e. reconfigure SCG):

4> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModListSCG*;

4> reconfigure the SCG RLC entity or entities and/ or the SCG DTCH logical channel in accordance with the *rlc-ConfigSCG* and *logicalChannelConfigSCG*, if included in *drb-ToAddModListSCG*;

2> if the DRB indicated by *drb-Identity* is an MCG DRB:

3> if *drb-ToAddModListSCG* is received and includes the *drb-Identity* value, while for this entry *drb-Type* is included and set to *split* (i.e. MCG to split):

4> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

4> reconfigure the MCG RLC entity and/ or the MCG DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

4> establish an SCG RLC entity and an SCG DTCH logical channel in accordance with the *rlc-ConfigSCG, logicalChannelIdentitySCG* and *logicalChannelConfigSCG*, included in *drb-ToAddModListSCG*;

3> else (i.e. *drb-Type* is included and set to *scg* i.e. MCG to SCG):

4> reconfigure the PDCP entity with the current SCG security configuration and in accordance with the *pdcp-Config*, if included in *drb-ToAddModListSCG*;

4> reconfigure the MCG RLC entity or entities and the MCG DTCH logical channel to be an SCG RLC entity or entities and an SCG DTCH logical channel;

DAINGEAN_0001894

4> reconfigure the SCG RLC entity or entities and/ or the SCG DTCH logical channel in accordance with the *rlc-ConfigSCG*, *logicalChannelIdentitySCG* and *logicalChannelConfigSCG*, if included in *drb-ToAddModListSCG*;

5.3.10.3a2 LWA specific DRB addition or reconfiguration

For the *drb-Identity* value for which this procedure is initiated, the UE shall:

1> if the *drb-Identity* value is not part of the current UE configuration (i.e. add LWA DRB):

2> establish a PDCP entity and configure it with the current security configuration and in accordance with the *pdcp-Config* included in *drb-ToAddModList*;

2> establish an RLC entity and an DTCH logical channel in accordance with the *rlc-Config, logicalChannelIdentity* and *logicalChannelConfig* included in *drb-ToAddModList*;

2> enable data handling for this DRB at the LWAAP entity;

2> indicate the establishment of the DRB and the *eps-BearerIdentity* of the established DRB to upper layers;

1> else if the DRB indicated by *drb-Identity* is not an LWA DRB (i.e. LTE only to LWA DRB):

2> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

2> reconfigure the RLC entity and/ or the DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

2> enable data handling for this DRB at the LWAAP entity;

1> else if the concerned entry of *drb-ToAddModList* includes the *drb-TypeLWA* set to *FALSE* (i.e. LWA to LTE only DRB):

2> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

2> reconfigure the RLC entity and/ or the DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

2> perform PDCP data recovery as specified in TS 36.323 [8];

2> disable data handling for this DRB at the LWAAP entity;

1> else (i.e. reconfigure LWA DRB):

2> reconfigure the PDCP entity in accordance with the *pdcp-Config*, if included in *drb-ToAddModList*;

2> reconfigure the RLC entity and/ or the DTCH logical channel in accordance with the *rlc-Config* and *logicalChannelConfig*, if included in *drb-ToAddModList*;

5.3.10.3a3 LWIP specific DRB addition or reconfiguration

For the *drb-Identity* value for which this procedure is initiated, the UE shall:

1> if the *drb-TypeLWIP* is set to *lwip*:

2> indicate to higher layers to use LWIP resources in both UL and DL for the DRB associated with the *drb-Identity*;

1> if the *drb-TypeLWIP* is set to *lwip-DL-only*:

2> indicate to higher layers to use LWIP resources in the DL only for the DRB associated with the *drb-Identity*;

1> if the *drb-TypeLWIP* is set to *lwip-UL-only*:

2> indicate to higher layers to use LWIP resources in the UL only for the DRB associated with the *drb-Identity*;

1> if the *drb-TypeLWIP* is set to *eutran*:

DAINGEAN_0001895

2> indicate to higher layers to stop using LWIP resources for the DRB associated with the *drb-Identity*;

5.3.10.3a SCell release

The UE shall:

1> if the release is triggered by reception of the *sCellToReleaseList* or the *sCellToReleaseListSCG*:

2> for each *sCellIndex* value included either in the *sCellToReleaseList* or in the *sCellToReleaseListSCG*:

3> if the current UE configuration includes an SCell with value *sCellIndex*:

4> release the SCell;

1> if the release is triggered by RRC connection re-establishment:

2> release all SCells that are part of the current UE configuration;

5.3.10.3b SCell addition/ modification

The UE shall:

1> for each *sCellIndex* value included either in the *sCellToAddModList* or in the *sCellToAddModListSCG* that is not part of the current UE configuration (SCell addition):

2> add the SCell, corresponding to the *cellIdentification*, in accordance with the *radioResourceConfigCommonSCell* and *radioResourceConfigDedicatedSCell*, both included either in the *sCellToAddModList* or in the *sCellToAddModListSCG*;

2> configure lower layers to consider the SCell to be in deactivated state;

2> for each *measId* included in the *measIdList* within *VarMeasConfig*:

3> if SCells are not applicable for the associated measurement; and

3> if the concerned SCell is included in *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId*:

4> remove the concerned SCell from *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId*;

1> for each *sCellIndex* value included either in the *sCellToAddModList* or in the *sCellToAddModListSCG* that is part of the current UE configuration (SCell modification):

2> modify the SCell configuration in accordance with the *radioResourceConfigDedicatedSCell*, included either in the *sCellToAddModList* or in the *sCellToAddModListSCG*;

5.3.10.3c PSCell addition or modification

The UE shall:

1> if the PSCell is not part of the current UE configuration (i.e. PSCell addition):

2> add the PSCell, corresponding to the *cellIdentification*, in accordance with the received *radioResourceConfigCommonPSCell* and *radioResourceConfigDedicatedPSCell*;

2> configure lower layers to consider the PSCell to be in activated state;

1> if the PSCell is part of the current UE configuration (i.e. PSCell modification):

2> modify the PSCell configuration in accordance with the received *radioResourceConfigDedicatedPSCell*;

5.3.10.4 MAC main reconfiguration

Except for NB-IoT, the UE shall:

DAINGEAN_0001896

1> if the procedure is triggered to perform SCG MAC main reconfiguration:

2> if SCG MAC is not part of the current UE configuration (i.e. SCG establishment):

3> create an SCG MAC entity;

2> reconfigure the SCG MAC main configuration as specified in the following i.e. assuming it concerns the SCG MAC whenever MAC main configuration is referenced and that it is based on the received *mac-MainConfigSCG* instead of *mac-MainConfig*:

1> reconfigure the MAC main configuration in accordance with the received *mac-MainConfig* other than *stag-ToReleaseList* and *stag-ToAddModList*;

1> if the received *mac-MainConfig* includes the *stag-ToReleaseList*:

2> for each *STAG-Id* value included in the *stag-ToReleaseList* that is part of the current UE configuration:

3> release the STAG indicated by *STAG-Id*;

1> if the received *mac-MainConfig* includes the *stag-ToAddModList*:

2> for each *stag-Id* value included in *stag-ToAddModList* that is not part of the current UE configuration (STAG addition):

3> add the STAG, corresponding to the *stag-Id*, in accordance with the received *timeAlignmentTimerSTAG*;

2> for each *stag-Id* value included in *stag-ToAddModList* that is part of the current UE configuration (STAG modification):

3> reconfigure the STAG, corresponding to the *stag-Id*, in accordance with the received *timeAlignmentTimerSTAG*;

For NB-IoT, the UE shall:

1> reconfigure the MAC main configuration in accordance with the received *mac-MainConfig*;

5.3.10.5 Semi-persistent scheduling reconfiguration

The UE shall:

1> reconfigure the semi-persistent scheduling in accordance with the received *sps-Config*;

5.3.10.6 Physical channel reconfiguration

Except for NB-IoT, the UE shall:

1> if the *antennaInfo-r10* is included in the received *physicalConfigDedicated* and the previous version of this field that was received by the UE was *antennaInfo* (without suffix i.e. the version defined in REL-8):

2> apply the default antenna configuration as specified in 9.2.4;

1> if the *cqi-ReportConfig-r10* is included in the received *physicalConfigDedicated* and the previous version of this field that was received by the UE was *cqi-ReportConfig* (without suffix i.e. the version defined in REL-8):

2> apply the default CQI reporting configuration as specified in 9.2.4;

NOTE: Application of the default configuration involves release of all extensions introduced in REL-9 and later.

1> reconfigure the physical channel configuration in accordance with the received *physicalConfigDedicated*;

1> if the *antennaInfo* is included and set to *explicitValue*:

2> if the configured *transmissionMode* is *tm1*, *tm2*, *tm5*, *tm6* or *tm7*; or

2> if the configured *transmissionMode* is *tm8* and *pmi-RI-Report* is not present; or

DAINGEAN_0001897

2> if the configured *transmissionMode* is *tm9* and *pmi-RI-Report* is not present; or

2> if the configured *transmissionMode* is *tm9* and *pmi-RI-Report* is present and *antennaPortsCount* within *csi-RS* is set to *an1*:

3> release *ri-ConfigIndex* in *cqi-ReportPeriodic*, if previously configured;

1> else if the *antennaInfo* is included and set to *defaultValue*:

2> release *ri-ConfigIndex* in *cqi-ReportPeriodic*, if previously configured;

For NB-IoT, the UE shall:

1> if the *carrierConfigDedicated* is not included in the received *physicalConfigDedicated*:

2> if the UE is configured with a carrier configuration previously received in *carrierConfigDedicated*:

3> use the carrier configuration received in *carrierConfigDedicated*;

2> else:

3> use the carrier configuration received for the anchor carrier in the system information;

1> else:

2> use the carrier configuration received in *carrierConfigDedicated*;

2> start to use the new carrier immediately after the last transport block carrying the RRC message has been acknowledged by the MAC layer, and any subsequent RRC response message sent for the current RRC procedure is therefore sent on the new carrier;

1> reconfigure the physical channel configuration in accordance with the received *physicalConfigDedicated*.

5.3.10.7 Radio Link Failure Timers and Constants reconfiguration

The UE shall:

1> if the received *rlf-TimersAndConstants* is set to release:

2> use values for timers T301, T310, T311 and constants N310, N311, as included in *ue-TimersAndConstants* received in *SystemInformationBlockType2* (or *SystemInformationBlockType2-NB* in NB-IoT);

1> else:

2> reconfigure the value of timers and constants in accordance with received *rlf-TimersAndConstants*;

1> if the received *rlf-TimersAndConstantsSCG* is set to release:

2> stop timer T313, if running, and

2> release the value of timer *t313* as well as constants *n313* and *n314*;

1> else:

2> reconfigure the value of timers and constants in accordance with received *rlf-TimersAndConstantsSCG*;

5.3.10.8 Time domain measurement resource restriction for serving cell

The UE shall:

1> if the received *measSubframePatternPCell* is set to *release*:

2> release the time domain measurement resource restriction for the PCell, if previously configured

1> else:

DAINGEAN_0001898

2> apply the time domain measurement resource restriction for the PCell in accordance with the received *measSubframePatternPCell;*

5.3.10.9 Other configuration

The UE shall:

1> if the received *otherConfig* includes the *reportProximityConfig*:

2> if *proximityIndicationEUTRA* is set to *enabled*:

3> consider itself to be configured to provide proximity indications for E-UTRA frequencies in accordance with 5.3.14;

2> else:

3> consider itself not to be configured to provide proximity indications for E-UTRA frequencies;

2> if *proximityIndicationUTRA* is set to *enabled*:

3> consider itself to be configured to provide proximity indications for UTRA frequencies in accordance with 5.3.14;

2> else:

3> consider itself not to be configured to provide proximity indications for UTRA frequencies;

1> if the received *otherConfig* includes the *obtainLocation*:

2> attempt to have detailed location information available for any subsequent measurement report;

NOTE: The UE is requested to attempt to have valid detailed location information available whenever sending a measurement report for which it is configured to include available detailed location information. The UE may not succeed e.g. because the user manually disabled the GPS hardware, due to no/poor satellite coverage. Further details, e.g. regarding when to activate GNSS, are up to UE implementation.

1> if the received *otherConfig* includes the *idc-Config*:

2> if *idc-Indication* is included (i.e. set to *setup*):

3> consider itself to be configured to provide IDC indications in accordance with 5.6.9;

3> if *idc-Indication-UL-CA* is included (i.e. set to *setup*):

4> consider itself to be configured to indicate UL CA related information in IDC indications in accordance with 5.6.9;

2> else:

3> consider itself not to be configured to provide IDC indications;

2> if *autonomousDenialParameters* is included:

3> consider itself to be allowed to deny any transmission in a particular UL subframe if during the number of subframes indicated by *autonomousDenialValidity*, preceeding and including this particular subframe, it autonomously denied fewer UL subframes than indicated by *autonomousDenialSubframes*;

2> else:

3> consider itself not to be allowed to deny any UL transmission;

1> if the received *otherConfig* includes the *powerPrefIndicationConfig*:

2> if *powerPrefIndicationConfig* is set to *setup*:

3> consider itself to be configured to provide power preference indications in accordance with 5.6.10;

DAINGEAN_0001899

2> else:

3> consider itself not to be configured to provide power preference indications;

5.3.10.10 SCG reconfiguration

The UE shall:

1> if the received *scg-Configuration* is set to *release* or includes the *mobilityControlInfoSCG* (i.e. SCG release/ change):

2> if *mobilityControlInfo* is not received (i.e. SCG release/ change without HO):

3> reset SCG MAC, if configured;

3> for each *drb-Identity* value that is part of the current UE configuration:

4> if the DRB indicated by *drb-Identity* is an SCG DRB:

5> re-establish the PDCP entity and the SCG RLC entity or entities;

4> if the DRB indicated by *drb-Identity* is a split DRB:

5> perform PDCP data recovery and re-establish the SCG RLC entity;

4> if the DRB indicated by *drb-Identity* is an MCG DRB; and

4> *drb-ToAddModListSCG* is received and includes the *drb-Identity* value, while for this entry *drb-Type* is included and set to *scg* (i.e. MCG to SCG):

5> re-establish the PDCP entity and the MCG RLC entity or entities;

3> configure lower layers to consider the SCG SCell(s), except for the PSCell, to be in deactivated state;

1> if the received *scg-Configuration* is set to *release*:

2> release the entire SCG configuration, except for the DRB configuration (i.e. as configured by *drb-ToAddModListSCG*);

2> if the current UE configuration includes one or more split or SCG DRBs and the received *RRCConnectionReconfiguration* message includes *radioResourceConfigDedicated* including *drb-ToAddModList*:

3> reconfigure the SCG or split DRB by *drb-ToAddModList* as specified in 5.3.10.12;

2> stop timer T313, if running;

2> stop timer T307, if running;

1> else:

2> if the received *scg-ConfigPartMCG* includes the *scg-Counter*:

3> update the S-K_{eNB} key based on the K_{eNB} key and using the received *scg-Counter* value, as specified in TS 33.401 [32];

3> derive the K_{UPenc} key associated with the *cipheringAlgorithmSCG* included in *mobilityControlInfoSCG* within the received *scg-ConfigPartSCG*, as specified in TS 33.401 [32];

3> configure lower layers to apply the ciphering algorithm and the K_{UPenc} key;

2> if the received *scg-ConfigPartSCG* includes the *radioResourceConfigDedicatedSCG*:

3> reconfigure the dedicated radio resource configuration for the SCG as specified in 5.3.10.11;

DAINGEAN_0001900

2> if the current UE configuration includes one or more split or SCG DRBs and the received *RRCConnectionReconfiguration* message includes *radioResourceConfigDedicated* including *drb-ToAddModList*:

3> reconfigure the SCG or split DRB by *drb-ToAddModList* as specified in 5.3.10.12;

2> if the received *scg-ConfigPartSCG* includes the *sCellToReleaseListSCG*:

3> perform SCell release for the SCG as specified in 5.3.10.3a;

2> if the received *scg-ConfigPartSCG* includes the *pSCellToAddMod*:

3> perform PSCell addition or modification as specified in 5.3.10.3c;

NOTE 0: This procedure is also used to release the PSCell e.g. PSCell change, SI change for the PSCell.

2> if the received *scg-ConfigPartSCG* includes the *sCellToAddModListSCG*:

3> perform SCell addition or modification as specified in 5.3.10.3b;

2> configure lower layers in accordance with *mobilityControlInfoSCG*, if received;

2> if the received *scg-ConfigPartSCG* includes the *mobilityControlInfoSCG* (i.e. SCG change):

3> resume all SCG DRBs and resume SCG transmission for split DRBs, if suspended;

3> stop timer T313, if running;

3> start timer T307 with the timer value set to *t307,* as included in the *mobilityControlInfoSCG*;

3> start synchronising to the DL of the target PSCell;

3> initiate the random access procedure on the PSCell, as specified in TS 36.321 [6]:

NOTE 1: The UE is not required to determine the SFN of the target PSCell by acquiring system information from that cell before performing RACH access in the target PSCell.

3> the procedure ends, except that the following actions are performed when MAC successfully completes the random access procedure on the PSCell:

4> stop timer T307;

4> apply the parts of the CQI reporting configuration, the scheduling request configuration and the sounding RS configuration that do not require the UE to know the SFN of the target PSCell, if any;

4> apply the parts of the measurement and the radio resource configuration that require the UE to know the SFN of the target PSCell (e.g. periodic CQI reporting, scheduling request configuration, sounding RS configuration), if any, upon acquiring the SFN of the target PSCell;

NOTE 2: Whenever the UE shall setup or reconfigure a configuration in accordance with a field that is received it applies the new configuration, except for the cases addressed by the above statements.

5.3.10.11 SCG dedicated resource configuration

The UE shall:

1> if the received *radioResourceConfigDedicatedSCG* includes the *drb-ToAddModListSCG*:

2> for each *drb-Identity* value included in the *drb-ToAddModListSCG* perform the DC specific DRB addition or reconfiguration as specified in 5.3.10.3a1

1> if the received *radioResourceConfigDedicatedSCG* includes the *mac-MainConfigSCG*:

2> perform the SCG MAC main reconfiguration as specified in 5.3.10.4;

1> if the received *radioResourceConfigDedicatedSCG* includes the *rlf-TimersAndConstantsSCG*:

DAINGEAN_0001901

2> reconfigure the values of timers and constants as specified in 5.3.10.7;

5.3.10.12 Reconfiguration SCG or split DRB by *drb-ToAddModList*

The UE shall:

1> for each split or SCG DRBs that is part of the current configuration:

2> if the corresponding *drb-Identity* value is included in the received *drb-ToAddModList; and*:

2> if the corresponding *drb-Identity* value is not included in the received *drb-ToAddModListSCG* (i.e. reconfigure split, split to MCG or SCG to MCG):

3> perform the DC specific DRB addition or reconfiguration as specified in 5.3.10.3a1;

5.3.10.13 Neighbour cell information reconfiguration

The UE shall:

1> if the received *naics-Info* is set to *release*:

2> instruct lower layer to release all the NAICS neighbour cell information for the concerned cell, if previously configured;

1> if the received *naics-Info* includes the *neighCellsToReleaseList-r12*:

2> for each *physCellId-r12* value included in the *neighCellsToReleaseList-r12* that is part of the current NAICS neighbour cell information of the concerned cell:

3> instruct lower layer to release the NAICS neighbour cell information for the concerned cell;

1> if the received *naics-Info* includes the *NeighCellsToAddModList-r12*:

2> for each *physCellId-r12* value included in the *neighCellsToAddModList-r12* that is not part of the current NAICS neighbour cell information of the concerned cell:

3> instruct lower layer to add the NAICS neighbour cell information for the concerned cell;

2> for each *physCellId-r12* value included in the *neighCellsToAddModList-r12* that is part of the current NAICS neighbour cell information of the concerned cell:

3> instruct lower layer to modify the NAICS neighbour cell information in accordance with the received *NeighCellsInfo* for the concerned cell;

5.3.10.14 Void

5.3.10.15 Sidelink dedicated configuration

The UE shall:

1> if the *RRCConnectionReconfiguration* message includes the *sl-CommConfig*:

2> if *commTxResources* is included and set to *setup*:

3> from the next SC period use the resources indicated by *commTxResources* for sidelink communication transmission, as specified in 5.10.4;

2> else if *commTxResources* is included and set to *release*:

3> from the next SC period, release the resources allocated for sidelink communication transmission previously configured by *commTxResources*;

1> if the *RRCConnectionReconfiguration* message includes the *sl-DiscConfig*:

2> if *discTxResources* is included and set to *setup*:

DAINGEAN_0001902

3> from the next discovery period, as defined by *discPeriod*, use the resources indicated by *discTxResources* for sidelink discovery announcement, as specified in 5.10.6;

2> else if *discTxResources* is included and set to *release*:

3> from the next discovery period, as defined by *discPeriod*, release the resources allocated for sidelink discovery announcement previously configured by *discTxResources*;

2> if *discTxResourcesPS* is included and set to *setup*:

3> from the next discovery period, as defined by *discPeriod*, use the resources indicated by *discTxResourcesPS* for sidelink discovery announcement, as specified in 5.10.6;

2> else if *discTxResourcesPS* is included and set to *release*:

3> from the next discovery period, as defined by *discPeriod*, release the resources allocated for sidelink discovery announcement previously configured by *discTxResourcesPS*;

2> if *discTxInterFreqInfo* is included and set to *setup*:

3> from the next discovery period, as defined by *discPeriod*, use the resources indicated by *discTxInterFreqInfo* for sidelink discovery announcement, as specified in 5.10.6;

2> else if *discTxInterFreqInfo* is included and set to *release*:

3> from the next discovery period, as defined by *discPeriod*, release the resources allocated for sidelink discovery announcement previously configured by *discTxInterFreqInfo*;

2> if *discRxGapConfig* is included and set to *setup*:

3> from the next gap period, as defined by *gapPeriod*, use the gaps indicated by *discRxGapConfig* for sidelink discovery monitoring, as specified in 5.10.5;

2> else if *discRxGapConfig* is included and set to *release*:

3> from the next gap period, as defined by *gapPeriod*, release the gaps configured for sidelink discovery monitoring previously configured by *discRxGapConfig*;

2> if *discTxGapConfig* is included and set to *setup*:

3> from the next gap period, as defined by *gapPeriod*, use the gaps indicated by *discTxGapConfig* for sidelink discovery announcement, as specified in 5.10.6;

2> else if *discTxGapConfig* is included and set to *release*:

3> from the next gap period, as defined by *gapPeriod*, release the gaps configured for sidelink discovery announcement previously configured by *discTxGapConfig*;

2> if *discSysInfoToReportConfig* is included and set to *setup*:

3> start timer T370 with the timer value set to 60s;

2> else if *discSysInfoToReportConfig* is included and set to *release*:

3> stop timer T370 and release *discSysInfoToReportConfig*;

5.3.10.16 T370 expiry

The UE shall:

1> if T370 expires:

2> release *discSysInfoToReportConfig*;

DAINGEAN_0001903

5.3.11 Radio link failure related actions

5.3.11.1 Detection of physical layer problems in RRC_CONNECTED

The UE shall:

1> upon receiving N310 consecutive "out-of-sync" indications for the PCell from lower layers while neither T300, T301, T304 nor T311 is running:

2> start timer T310;

1> upon receiving N313 consecutive "out-of-sync" indications for the PSCell from lower layers while T307 is not running:

2> start T313;

NOTE: Physical layer monitoring and related autonomous actions do not apply to SCells except for the PSCell.

5.3.11.2 Recovery of physical layer problems

Upon receiving N311 consecutive "in-sync" indications for the PCell from lower layers while T310 is running, the UE shall:

1> stop timer T310;

1> stop timer T312, if running;

NOTE 1: In this case, the UE maintains the RRC connection without explicit signalling, i.e. the UE maintains the entire radio resource configuration.

NOTE 2: Periods in time where neither "in-sync" nor "out-of-sync" is reported by layer 1 do not affect the evaluation of the number of consecutive "in-sync" or "out-of-sync" indications.

Upon receiving N314 consecutive "in-sync" indications for the PSCell from lower layers while T313 is running, the UE shall:

1> stop timer T313;

5.3.11.3 Detection of radio link failure

The UE shall:

1> upon T310 expiry; or

1> upon T312 expiry; or

1> upon random access problem indication from MCG MAC while neither T300, T301, T304 nor T311 is running; or

1> upon indication from MCG RLC that the maximum number of retransmissions has been reached for an SRB or for an MCG or split DRB:

2> consider radio link failure to be detected for the MCG i.e. RLF;

2> except for NB-IoT, store the following radio link failure information in the *VarRLF-Report* by setting its fields as follows:

3> clear the information included in *VarRLF-Report*, if any;

3> set the *plmn-IdentityList* to include the list of EPLMNs stored by the UE (i.e. includes the RPLMN);

3> set the *measResultLastServCell* to include the RSRP and RSRQ, if available, of the PCell based on measurements collected up to the moment the UE detected radio link failure;

DAINGEAN_0001904

3> set the *measResultNeighCells* to include the best measured cells, other than the PCell, ordered such that the best cell is listed first, and based on measurements collected up to the moment the UE detected radio link failure, and set its fields as follows;

4> if the UE was configured to perform measurements for one or more EUTRA frequencies, include the *measResultListEUTRA*;

4> if the UE was configured to perform measurement reporting for one or more neighbouring UTRA frequencies, include the *measResultListUTRA*;

4> if the UE was configured to perform measurement reporting for one or more neighbouring GERAN frequencies, include the *measResultListGERAN*;

4> if the UE was configured to perform measurement reporting for one or more neighbouring CDMA2000 frequencies, include the *measResultsCDMA2000*;

4> for each neighbour cell included, include the optional fields that are available;

NOTE 1: The measured quantities are filtered by the L3 filter as configured in the mobility measurement configuration. The measurements are based on the time domain measurement resource restriction, if configured. Blacklisted cells are not required to be reported.

3> if detailed location information is available, set the content of the *locationInfo* as follows:

4> include the *locationCoordinates*;

4> include the *horizontalVelocity*, if available;

3> set the *failedPCellId* to the global cell identity, if available, and otherwise to the physical cell identity and carrier frequency of the PCell where radio link failure is detected;

3> set the *tac-FailedPCell* to the tracking area code, if available, of the PCell where radio link failure is detected;

3> if an *RRCConnectionReconfiguration* message including the *mobilityControlInfo* was received before the connection failure:

4> if the last *RRCConnectionReconfiguration* message including the *mobilityControlInfo* concerned an intra E-UTRA handover:

5> include the *previousPCellId* and set it to the global cell identity of the PCell where the last *RRCConnectionReconfiguration* message including *mobilityControlInfo* was received;

5> set the *timeConnFailure* to the elapsed time since reception of the last *RRCConnectionReconfiguration* message including the *mobilityControlInfo*;

4> if the last *RRCConnectionReconfiguration* message including the *mobilityControlInfo* concerned a handover to E-UTRA from UTRA and if the UE supports Radio Link Failure Report for Inter-RAT MRO:

5> include the *previousUTRA-CellId* and set it to the physical cell identity, the carrier frequency and the global cell identity, if available, of the UTRA Cell in which the last *RRCConnectionReconfiguration* message including *mobilityControlInfo* was received;

5> set the *timeConnFailure* to the elapsed time since reception of the last *RRCConnectionReconfiguration* message including the *mobilityControlInfo*;

3> if the UE supports QCI1 indication in Radio Link Failure Report and has a DRB for which QCI is 1:

4> include the *drb-EstablishedWithQCI-1*;

3> set the *connectionFailureType* to *rlf*;

3> set the *c-RNTI* to the C-RNTI used in the PCell;

3> set the *rlf-Cause* to the trigger for detecting radio link failure;

DAINGEAN_0001905

2> if AS security has not been activated:

3> if the UE is a NB-IoT UE:

4> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'RRC connection failure';

3> else:

4> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'other';

2> else:

3> initiate the connection re-establishment procedure as specified in 5.3.7;

The UE shall:

1> upon T313 expiry; or

1> upon random access problem indication from SCG MAC; or

1> upon indication from SCG RLC that the maximum number of retransmissions has been reached for an SCG or split DRB:

2> consider radio link failure to be detected for the SCG i.e. SCG-RLF;

2> initiate the SCG failure information procedure as specified in 5.6.13 to report SCG radio link failure;

The UE may discard the radio link failure information, i.e. release the UE variable *VarRLF-Report*, 48 hours after the radio link failure is detected, upon power off or upon detach.

5.3.12 UE actions upon leaving RRC_CONNECTED

Upon leaving RRC_CONNECTED, the UE shall:

1> reset MAC;

1> stop all timers that are running except T320, T325 and T330;

1> if leaving RRC_CONNECTED was triggered by suspension of the RRC:

2> store the UE AS Context including the current RRC configuration, the current security context, the PDCP state including ROHC state, C-RNTI used in the source PCell, the *cellIdentity* and the physical cell identity of the source PCell;

2> store the following information provided by E-UTRAN:

3> the *resumeIdentity*;

2> suspend all SRB(s) and DRB(s);

2> indicate the suspension of the RRC connection to upper layers;

1> else:

2> release all radio resources, including release of the RLC entity, the MAC configuration and the associated PDCP entity for all established RBs;

2> indicate the release of the RRC connection to upper layers together with the release cause;

1> if leaving RRC_CONNECTED was triggered neither by reception of the *MobilityFromEUTRACommand* message nor by selecting an inter-RAT cell while T311 was running:

2> if timer T350 is configured:

3> start timer T350;

DAINGEAN_0001906

3> apply *rclwi-Configuration* if configured, otherwise apply the *wlan-Id-List* corresponding to the RPLMN included in *SystemInformationBlockType17*;

2> else:

3> release the *wlan-OffloadConfigDedicated*, if received;

3> if the *wlan-OffloadConfigCommon* corresponding to the RPLMN is broadcast by the cell:

4> apply the *wlan-OffloadConfigCommon* corresponding to the RPLMN included in *SystemInformationBlockType17*;

4> apply *steerToWLAN* if configured, otherwise apply the *wlan-Id-List* corresponding to the RPLMN included in *SystemInformationBlockType17*;

2> enter RRC_IDLE and perform procedures as specified in TS 36.304 [4, 5.2.7];

1> else:

2> release the *wlan-OffloadConfigDedicated*, if received;

NOTE: BL UEs or UEs in CE verifies validity of SI when released to RRC_IDLE.

1> indicate the release of LWA configuration, if configured, to upper layers;

1> release the LWIP configuration, if configured, as described in 5.6.17.3;

5.3.13 UE actions upon PUCCH/ SRS release request

Upon receiving a PUCCH release request from lower layers, for an indicated serving cell the UE shall:

1> apply the default physical channel configuration for *cqi-ReportConfig* for the indicated serving cell as specified in 9.2.4 and release *cqi-ReportConfigSCell*, for each SCell that sends HARQ feedback on the indicated serving cell, if any;

1> apply the default physical channel configuration for *schedulingRequestConfig* as specified in 9.2.4, for the concerned CG;

Upon receiving an SRS release request from lower layers, for an indicated serving cell the UE shall:

1> apply the default physical channel configuration for *soundingRS-UL-ConfigDedicated,* as specified in 9.2.4;

NOTE: Upon PUCCH/ SRS release request, the UE does not modify the *soundingRS-UL-ConfigDedicatedAperiodic* i.e. it does not apply the default for this field (release).

5.3.14 Proximity indication

5.3.14.1 General

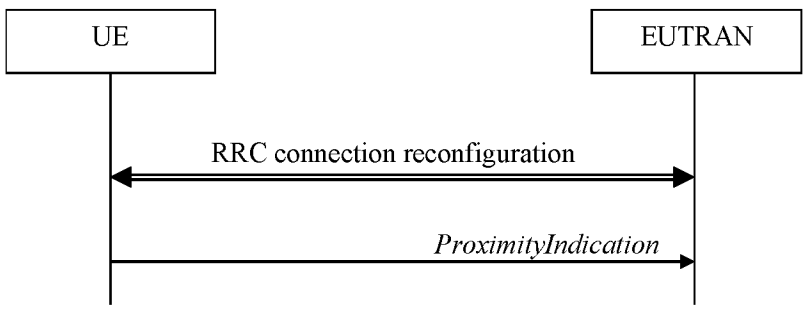


Figure 5.3.14.1-1: Proximity indication

DAINGEAN_0001907

The purpose of this procedure is to indicate that the UE is entering or leaving the proximity of one or more CSG member cells. The detection of proximity is based on an autonomous search function as defined in TS 36.304 [4].

5.3.14.2 Initiation

A UE in RRC_CONNECTED shall:

1> if the UE enters the proximity of one or more CSG member cell(s) on an E-UTRA frequency while proximity indication is enabled for such E-UTRA cells; or

1> if the UE enters the proximity of one or more CSG member cell(s) on an UTRA frequency while proximity indication is enabled for such UTRA cells; or

1> if the UE leaves the proximity of all CSG member cell(s) on an E-UTRA frequency while proximity indication is enabled for such E-UTRA cells; or

1> if the UE leaves the proximity of all CSG member cell(s) on an UTRA frequency while proximity indication is enabled for such UTRA cells:

2> if the UE has previously not transmitted a *ProximityIndication* for the RAT and frequency during the current RRC connection, or if more than 5 s has elapsed since the UE has last transmitted a *ProximityIndication* (either entering or leaving) for the RAT and frequency:

3> initiate transmission of the *ProximityIndication* message in accordance with 5.3.14.3;

NOTE: In the conditions above, "if the UE enters the proximity of one or more CSG member cell(s)" includes the case of already being in the proximity of such cell(s) at the time proximity indication for the corresponding RAT is enabled.

5.3.14.3 Actions related to transmission of *ProximityIndication* message

The UE shall set the contents of *ProximityIndication* message as follows:

1> if the UE applies the procedure to report entering the proximity of CSG member cell(s):

2> set *type* to *entering*;

1> else if the UE applies the procedure to report leaving the proximity of CSG member cell(s):

2> set *type* to *leaving*;

1> if the proximity indication was triggered for one or more CSG member cell(s) on an E-UTRA frequency:

2> set the *carrierFreq* to *eutra* with the value set to the E-ARFCN value of the E-UTRA cell(s) for which proximity indication was triggered;

1> else if the proximity indication was triggered for one or more CSG member cell(s) on a UTRA frequency:

2> set the *carrierFreq* to *utra* with the value set to the ARFCN value of the UTRA cell(s) for which proximity indication was triggered;

The UE shall submit the *ProximityIndication* message to lower layers for transmission.

5.3.15 Void

5.4 Inter-RAT mobility

5.4.1 Introduction

The general principles of connected mode mobility are described in 5.3.1.3. The general principles of the security handling upon connected mode mobility are described in 5.3.1.2.

DAINGEAN_0001908

For the (network controlled) inter RAT mobility from E-UTRA for a UE in RRC_CONNECTED, a single procedure is defined that supports both handover, cell change order with optional network assistance (NACC) and enhanced CS fallback to CDMA2000 1xRTT. In case of mobility to CDMA2000, the eNB decides when to move to the other RAT while the target RAT determines to which cell the UE shall move.

5.4.2 Handover to E-UTRA

5.4.2.1 General

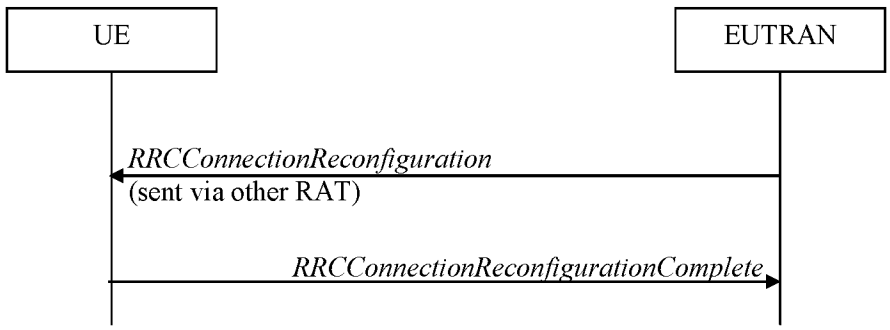


Figure 5.4.2.1-1: Handover to E-UTRA, successful

The purpose of this procedure is to, under the control of the network, transfer a connection between the UE and another Radio Access Network (e.g. GERAN or UTRAN) to E-UTRAN.

The handover to E-UTRA procedure applies when SRBs, possibly in combination with DRBs, are established in another RAT. Handover from UTRAN to E-UTRAN applies only after integrity has been activated in UTRAN.

5.4.2.2 Initiation

The RAN using another RAT initiates the handover to E-UTRA procedure, in accordance with the specifications applicable for the other RAT, by sending the *RRCConnectionReconfiguration* message via the radio access technology from which the inter-RAT handover is performed.

E-UTRAN applies the procedure as follows:

- to activate ciphering, possibly using NULL algorithm, if not yet activated in the other RAT;
- to establish SRB1, SRB2 and one or more DRBs, i.e. at least the DRB associated with the default EPS bearer is established;

5.4.2.3 Reception of the *RRCConnectionReconfiguration* by the UE

If the UE is able to comply with the configuration included in the *RRCConnectionReconfiguration* message, the UE shall:

1> apply the default physical channel configuration as specified in 9.2.4;

1> apply the default semi-persistent scheduling configuration as specified in 9.2.3;

1> apply the default MAC main configuration as specified in 9.2.2;

1> start timer T304 with the timer value set to *t304,* as included in the *mobilityControlInfo*;

1> consider the target PCell to be one on the frequency indicated by the *carrierFreq* with a physical cell identity indicated by the *targetPhysCellId*;

1> start synchronising to the DL of the target PCell;

1> set the C-RNTI to the value of the *newUE-Identity*;

1> for the target PCell, apply the downlink bandwidth indicated by the *dl-Bandwidth;*

DAINGEAN_0001909

1> for the target PCell, apply the uplink bandwidth indicated by (the absence or presence of) the *ul-Bandwidth;*

1> configure lower layers in accordance with the received *radioResourceConfigCommon*;

1> configure lower layers in accordance with any additional fields, not covered in the previous, if included in the received *mobilityControlInfo*;

1> perform the radio resource configuration procedure as specified in 5.3.10;

1> forward the *nas-SecurityParamToEUTRA* to the upper layers;

1> derive the K_{eNB} key, as specified in TS 33.401 [32];

1> derive the K_{RRCint} key associated with the *integrityProtAlgorithm*, as specified in TS 33.401 [32];

1> derive the K_{RRCenc} key and the K_{UPenc} key associated with the *cipheringAlgorithm*, as specified in TS 33.401 [32];

1> configure lower layers to apply the indicated integrity protection algorithm and the K_{RRCint} key immediately, i.e. the indicated integrity protection configuration shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

1> configure lower layers to apply the indicated ciphering algorithm, the K_{RRCenc} key and the K_{UPenc} key immediately, i.e. the indicated ciphering configuration shall be applied to all subsequent messages received and sent by the UE, including the message used to indicate the successful completion of the procedure;

1> if the received *RRCConnectionReconfiguration* includes the s*CellToAddModList*:

2> perform SCell addition as specified in 5.3.10.3b;

1> if the *RRCConnectionReconfiguration* message includes the *measConfig*:

2> perform the measurement configuration procedure as specified in 5.5.2;

1> perform the measurement identity autonomous removal as specified in 5.5.2.2a;

1> if the *RRCConnectionReconfiguration* message includes the *otherConfig*:

2> perform the other configuration procedure as specified in 5.3.10.9;

1> if the *RRCConnectionReconfiguration* message includes *wlan-OffloadInfo*:

2> perform the dedicated WLAN offload configuration procedure as specified in 5.6.12.2;

1> if the *RRCConnectionReconfiguration* message includes *rclwi-Configuration*:

2> perform the WLAN traffic steering command procedure as specified in 5.6.16.2;

1> if the *RRCConnectionReconfiguration* message includes *lwa-Configuration*:

2> perform the LWA configuration procedure as specified in 5.6.14.2;

1> if the *RRCConnectionReconfiguration* message includes *lwip-Configuration*:

2> perform the LWIP reconfiguration procedure as specified in 5.6.17.2;

1> set the content of *RRCConnectionReconfigurationComplete* message as follows:

2> if the UE has radio link failure or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

3> include *rlf-InfoAvailable*;

2> if the UE has MBSFN logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport* and if T330 is not running:

3> include *logMeasAvailableMBSFN*;

DAINGEAN_0001910

2> else if the UE has logged measurements available for E-UTRA and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

3> include the *logMeasAvailable*;

2> if the UE has connection establishment failure information available in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

3> include *connEstFailInfoAvailable*;

1> submit the *RRCConnectionReconfigurationComplete* message to lower layers for transmission using the new configuration;

1> if the *RRCConnectionReconfiguration* message does not include *rlf-TimersAndConstants* set to *setup*:

2> use the default values specified in 9.2.5 for timer T310, T311 and constant N310, N311;

1> if MAC successfully completes the random access procedure:

2> stop timer T304;

2> apply the parts of the CQI reporting configuration, the scheduling request configuration and the sounding RS configuration that do not require the UE to know the SFN of the target PCell, if any;

2> apply the parts of the measurement and the radio resource configuration that require the UE to know the SFN of the target PCell (e.g. measurement gaps, periodic CQI reporting, scheduling request configuration, sounding RS configuration), if any, upon acquiring the SFN of the target PCell;

NOTE 1: Whenever the UE shall setup or reconfigure a configuration in accordance with a field that is received it applies the new configuration, except for the cases addressed by the above statements.

2> enter E-UTRA RRC_CONNECTED, upon which the procedure ends;

NOTE 2: The UE is not required to determine the SFN of the target PCell by acquiring system information from that cell before performing RACH access in the target PCell.

5.4.2.4 Reconfiguration failure

The UE shall:

1> if the UE is unable to comply with (part of) the configuration included in the *RRCConnectionReconfiguration* message:

2> perform the actions defined for this failure case as defined in the specifications applicable for the other RAT;

NOTE 1: The UE may apply above failure handling also in case the *RRCConnectionReconfiguration* message causes a protocol error for which the generic error handling as defined in 5.7 specifies that the UE shall ignore the message.

NOTE 2: If the UE is unable to comply with part of the configuration, it does not apply any part of the configuration, i.e. there is no partial success/ failure.

5.4.2.5 T304 expiry (handover to E-UTRA failure)

The UE shall:

1> upon T304 expiry (handover to E-UTRA failure):

2> reset MAC;

2> perform the actions defined for this failure case as defined in the specifications applicable for the other RAT;

DAINGEAN_0001911

5.4.3 Mobility from E-UTRA

5.4.3.1 General



Figure 5.4.3.1-1: Mobility from E-UTRA, successful

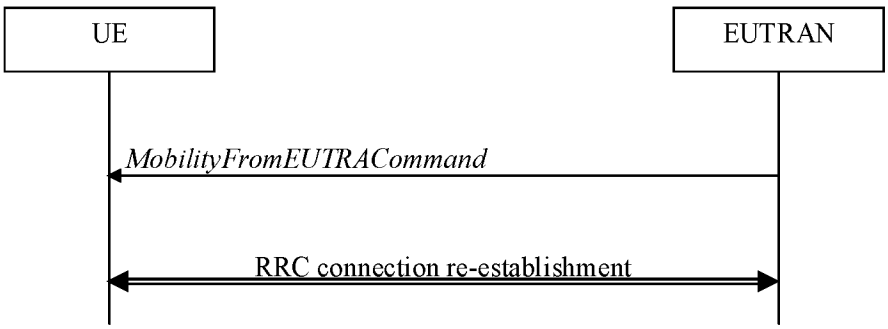


Figure 5.4.3.1-2: Mobility from E-UTRA, failure

The purpose of this procedure is to move a UE in RRC_CONNECTED to a cell using another Radio Access Technology (RAT), e.g. GERAN, UTRA or CDMA2000 systems. The mobility from E-UTRA procedure covers the following type of mobility:

- handover, i.e. the *MobilityFromEUTRACommand* message includes radio resources that have been allocated for the UE in the target cell;
- cell change order, i.e. the *MobilityFromEUTRACommand* message may include information facilitating access of and/ or connection establishment in the target cell, e.g. system information. Cell change order is applicable only to GERAN; and
- enhanced CS fallback to CDMA2000 1xRTT, i.e. the *MobilityFromEUTRACommand* message includes radio resources that have been allocated for the UE in the target cell. The enhanced CS fallback to CDMA2000 1xRTT may be combined with concurrent handover or redirection to CDMA2000 HRPD.

NOTE: For the case of dual receiver/transmitter enhanced CS fallback to CDMA2000 1xRTT, the *DLInformationTransfer* message is used instead of the *MobilityFromEUTRACommand* message (see TS 36.300 [9]).

5.4.3.2 Initiation

E-UTRAN initiates the mobility from E-UTRA procedure to a UE in RRC_CONNECTED, possibly in response to a *MeasurementReport* message or in response to reception of CS fallback indication for the UE from MME, by sending a *MobilityFromEUTRACommand* message. E-UTRAN applies the procedure as follows:

- the procedure is initiated only when AS-security has been activated, and SRB2 with at least one DRB are setup and not suspended;

5.4.3.3 Reception of the *MobilityFromEUTRACommand* by the UE

The UE shall be able to receive a *MobilityFromEUTRACommand* message and perform a cell change order to GERAN, even if no prior UE measurements have been performed on the target cell.

DAINGEAN_0001912

The UE shall:

1> stop timer T310, if running;

1> stop timer T312, if running;

1> if the *MobilityFromEUTRACommand* message includes the *purpose* set to *handover*:

2> if the *targetRAT-Type* is set to *utra* or *geran*:

3> consider inter-RAT mobility as initiated towards the RAT indicated by the *targetRAT-Type* included in the *MobilityFromEUTRACommand* message;

3> forward the *nas-SecurityParamFromEUTRA* to the upper layers;

3> access the target cell indicated in the inter-RAT message in accordance with the specifications of the target RAT;

3> if the *targetRAT-Type* is set to *geran*:

4> use the contents of *systemInformation*, if provided for PS Handover, as the system information to begin access on the target GERAN cell;

NOTE 1: If there are DRBs for which no radio bearers are established in the target RAT as indicated in the *targetRAT-MessageContainer* in the message, the E-UTRA RRC part of the UE does not indicate the release of the concerned DRBs to the upper layers. Upper layers may derive which bearers are not established from information received from the AS of the target RAT.

NOTE 2: In case of SR-VCC, the DRB to be replaced is specified in [61].

2> else if the *targetRAT-Type* is set to *cdma2000-1XRTT* or *cdma2000-HRPD*:

3> forward the *targetRAT-Type* and the *targetRAT-MessageContainer* to the CDMA2000 upper layers for the UE to access the cell(s) indicated in the inter-RAT message in accordance with the specifications of the CDMA2000 target-RAT;

1> else if the *MobilityFromEUTRACommand* message includes the *purpose* set to *cellChangeOrder*:

2> start timer T304 with the timer value set to *t304,* as included in the *MobilityFromEUTRACommand* message;

2> if the *targetRAT-Type* is set to *geran*:

3> if *networkControlOrder* is included in the *MobilityFromEUTRACommand* message:

4> apply the value as specified in TS 44.060 [36];

3> else:

4> acquire *networkControlOrder* and apply the value as specified in TS 44.060 [36];

3> use the contents of *systemInformation*, if provided, as the system information to begin access on the target GERAN cell;

2> establish the connection to the target cell indicated in the *CellChangeOrder*;

NOTE 3: The criteria for success or failure of the cell change order to GERAN are specified in TS 44.060[36].

1> if the *MobilityFromEUTRACommand* message includes the *purpose* set to *e-CSFB*:

2> if *messageContCDMA2000-1XRTT* is present:

3> forward the *messageContCDMA2000-1XRTT* to the CDMA2000 upper layers for the UE to access the cell(s) indicated in the inter-RAT message in accordance with the specification of the target RAT;

2> if *mobilityCDMA2000-HRPD* is present and is set to *handover*:

3> forward the *messageContCDMA2000-HRPD* to the CDMA2000 upper layers for the UE to access the cell(s) indicated in the inter-RAT message in accordance with the specification of the target RAT;

DAINGEAN_0001913

2> if *mobilityCDMA2000-HRPD* is present and is set to *redirection*:

3> forward the *redirectCarrierCDMA2000-HRPD* to the CDMA2000 upper layers;

NOTE 4: When the CDMA2000 upper layers in the UE receive both the *messageContCDMA2000-1XRTT* and *messageContCDMA2000-HRPD* the UE performs concurrent access to both CDMA2000 1xRTT and CDMA2000 HRPD RAT.

NOTE 5: The UE should perform the handover, the cell change order or enhanced 1xRTT CS fallback as soon as possible following the reception of the RRC message *MobilityFromEUTRACommand*, which could be before confirming successful reception (HARQ and ARQ) of this message.

5.4.3.4 Successful completion of the mobility from E-UTRA

Upon successfully completing the handover, the cell change order or enhanced 1xRTT CS fallback, the UE shall:

1> perform the actions upon leaving RRC_CONNECTED as specified in 5.3.12, with release cause 'other';

NOTE: If the UE performs enhanced 1xRTT CS fallback along with concurrent mobility to CDMA2000 HRPD and the connection to either CDMA2000 1xRTT or CDMA2000 HRPD succeeds, then the mobility from E-UTRA is considered successful.

5.4.3.5 Mobility from E-UTRA failure

The UE shall:

1> if T304 expires (mobility from E-UTRA failure); or

1> if the UE does not succeed in establishing the connection to the target radio access technology; or

1> if the UE is unable to comply with (part of) the configuration included in the *MobilityFromEUTRACommand* message; or

1> if there is a protocol error in the inter RAT information included in the *MobilityFromEUTRACommand* message, causing the UE to fail the procedure according to the specifications applicable for the target RAT:

2> stop T304, if running;

2> if the *cs-FallbackIndicator* in the *MobilityFromEUTRACommand* message was set to *TRUE* or *e-CSFB* was present:

3> indicate to upper layers that the CS fallback procedure has failed;

2> revert back to the configuration used in the source PCell, excluding the configuration configured by the *physicalConfigDedicated*, *mac-MainConfig* and *sps-Config*;

2> initiate the connection re-establishment procedure as specified in 5.3.7;

NOTE: For enhanced CS fallback to CDMA2000 1xRTT, the above UE behavior applies only when the UE is attempting the enhanced 1xRTT CS fallback and connection to the target radio access technology fails or if the UE is attempting enhanced 1xRTT CS fallback along with concurrent mobility to CDMA2000 HRPD and connection to both the target radio access technologies fails.

DAINGEAN_0001914

5.4.4 Handover from E-UTRA preparation request (CDMA2000)

5.4.4.1 General

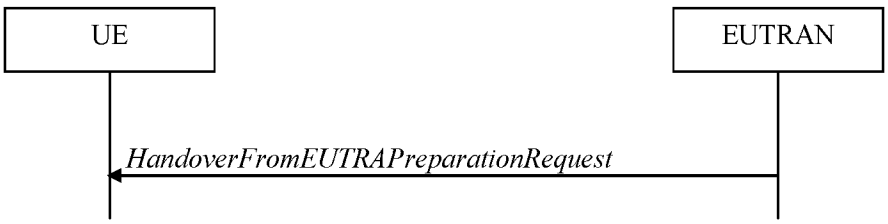


Figure 5.4.4.1-1: Handover from E-UTRA preparation request

The purpose of this procedure is to trigger the UE to prepare for handover or enhanced 1xRTT CS fallback to CDMA2000 by requesting a connection with this network. The UE may use this procedure to concurrently prepare for handover to CDMA2000 HRPD along with preparation for enhanced CS fallback to CDMA2000 1xRTT. This procedure applies to CDMA2000 capable UEs only.

This procedure is also used to trigger the UE which supports dual Rx/Tx enhanced 1xCSFB to redirect its second radio to CDMA2000 1xRTT.

The handover from E-UTRA preparation request procedure applies when signalling radio bearers are established.

5.4.4.2 Initiation

E-UTRAN initiates the handover from E-UTRA preparation request procedure to a UE in RRC_CONNECTED, possibly in response to a *MeasurementReport* message or CS fallback indication for the UE, by sending a *HandoverFromEUTRAPreparationRequest* message. E-UTRA initiates the procedure only when AS security has been activated.

5.4.4.3 Reception of the *HandoverFromEUTRAPreparationRequest* by the UE

Upon reception of the *HandoverFromEUTRAPreparationRequest* message, the UE shall:

1> if *dualRxTxRedirectIndicator* is present in the received message:

2> forward *dualRxTxRedirectIndicator* to the CDMA2000 upper layers;

2> forward *redirectCarrierCDMA2000-1XRTT* to the CDMA2000 upper layers, if included;

1> else:

2> indicate the request to prepare handover or enhanced 1xRTT CS fallback and forward the *cdma2000-Type* to the CDMA2000 upper layers;

2> if *cdma2000-Type* is set to *type1XRTT*:

3> forward the *rand* and the *mobilityParameters* to the CDMA2000 upper layers;

2> if *concurrPrepCDMA2000-HRPD* is present in the received message:

3> forward *concurrPrepCDMA2000-HRPD* to the CDMA2000 upper layers;

2> else:

3> forward *concurrPrepCDMA2000-HRPD*, with its value set to *FALSE*, to the CDMA2000 upper layers;

DAINGEAN_0001915

5.4.5 UL handover preparation transfer (CDMA2000)

5.4.5.1 General

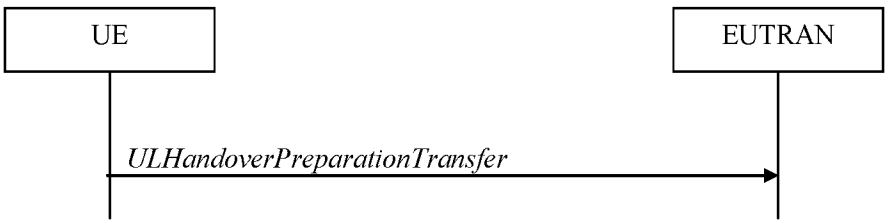


Figure 5.4.5.1-1: UL handover preparation transfer

The purpose of this procedure is to tunnel the handover related CDMA2000 dedicated information or enhanced 1xRTT CS fallback related CDMA2000 dedicated information from UE to E-UTRAN when requested by the higher layers. The procedure is triggered by the higher layers on receipt of *HandoverFromEUTRAPreparationRequest* message. If preparing for enhanced CS fallback to CDMA2000 1xRTT and handover to CDMA2000 HRPD, the UE sends two consecutive *ULHandoverPreparationTransfer* messages to E-UTRAN, one per addressed CDMA2000 RAT Type. This procedure applies to CDMA2000 capable UEs only.

5.4.5.2 Initiation

A UE in RRC_CONNECTED initiates the UL handover preparation transfer procedure whenever there is a need to transfer handover or enhanced 1xRTT CS fallback related non-3GPP dedicated information. The UE initiates the UL handover preparation transfer procedure by sending the *ULHandoverPreparationTransfer* message.

5.4.5.3 Actions related to transmission of the *ULHandoverPreparationTransfer* message

The UE shall set the contents of the *ULHandoverPreparationTransfer* message as follows:

1> include the *cdma2000-Type* and the *dedicatedInfo*;

1> if the *cdma2000-Type* is set to *type1XRTT*:

2> include the *meid* and set it to the value received from the CDMA2000 upper layers;

1> submit the *ULHandoverPreparationTransfer* message to lower layers for transmission, upon which the procedure ends;

5.4.5.4 Failure to deliver the *ULHandoverPreparationTransfer* message

The UE shall:

1> if the UE is unable to guarantee successful delivery of *ULHandoverPreparationTransfer* messages:

2> inform upper layers about the possible failure to deliver the information contained in the concerned *ULHandoverPreparationTransfer* message;

5.4.6 Inter-RAT cell change order to E-UTRAN

5.4.6.1 General

The purpose of the inter-RAT cell change order to E-UTRAN procedure is to transfer, under the control of the source radio access technology, a connection between the UE and another radio access technology (e.g. GSM/ GPRS) to E-UTRAN.

DAINGEAN_0001916

5.4.6.2 Initiation

The procedure is initiated when a radio access technology other than E-UTRAN, e.g. GSM/GPRS, using procedures specific for that RAT, orders the UE to change to an E-UTRAN cell. In response, upper layers request the establishment of an RRC connection as specified in subclause 5.3.3.

NOTE: Within the message used to order the UE to change to an E-UTRAN cell, the source RAT should specify the identity of the target E-UTRAN cell as specified in the specifications for that RAT.

The UE shall:

1> upon receiving an *RRCConnectionSetup* message:

2> consider the inter-RAT cell change order procedure to have completed successfully;

5.4.6.3 UE fails to complete an inter-RAT cell change order

If the inter-RAT cell change order fails the UE shall return to the other radio access technology and proceed as specified in the appropriate specifications for that RAT.

The UE shall:

1> upon failure to establish the RRC connection as specified in subclause 5.3.3:

2> consider the inter-RAT cell change order procedure to have failed;

NOTE: The cell change was network ordered. Therefore, failure to change to the target PCell should not cause the UE to move to UE-controlled cell selection.

5.5 Measurements

5.5.1 Introduction

The UE reports measurement information in accordance with the measurement configuration as provided by E-UTRAN. E-UTRAN provides the measurement configuration applicable for a UE in RRC_CONNECTED by means of dedicated signalling, i.e. using the *RRCConnectionReconfiguration* message.

The UE can be requested to perform the following types of measurements:

- Intra-frequency measurements: measurements at the downlink carrier frequency(ies) of the serving cell(s).
- Inter-frequency measurements: measurements at frequencies that differ from any of the downlink carrier frequency(ies) of the serving cell(s).
- Inter-RAT measurements of UTRA frequencies.
- Inter-RAT measurements of GERAN frequencies.
- Inter-RAT measurements of CDMA2000 HRPD or CDMA2000 1xRTT or WLAN frequencies.

The measurement configuration includes the following parameters:

1. **Measurement objects:** The objects on which the UE shall perform the measurements.
   - For intra-frequency and inter-frequency measurements a measurement object is a single E-UTRA carrier frequency. Associated with this carrier frequency, E-UTRAN can configure a list of cell specific offsets, a list of 'blacklisted' cells and a list of 'whitelisted' cells. Blacklisted cells are not considered in event evaluation or measurement reporting.
   - For inter-RAT UTRA measurements a measurement object is a set of cells on a single UTRA carrier frequency.
   - For inter-RAT GERAN measurements a measurement object is a set of GERAN carrier frequencies.

DAINGEAN_0001917

- For inter-RAT CDMA2000 measurements a measurement object is a set of cells on a single (HRPD or 1xRTT) carrier frequency.

- For inter-RAT WLAN measurements a measurement object is a set of WLAN identifiers and optionally a set of WLAN frequencies.

NOTE 1: Some measurements using the above mentioned measurement objects, only concern a single cell, e.g. measurements used to report neighbouring cell system information, PCell UE Rx-Tx time difference, or a pair of cells, e.g. SSTD measurements between the PCell and the PSCell.

2. **Reporting configurations**: A list of reporting configurations where each reporting configuration consists of the following:

   - Reporting criterion: The criterion that triggers the UE to send a measurement report. This can either be periodical or a single event description.

   - Reporting format: The quantities that the UE includes in the measurement report and associated information (e.g. number of cells to report).

3. **Measurement identities**: A list of measurement identities where each measurement identity links one measurement object with one reporting configuration. By configuring multiple measurement identities it is possible to link more than one measurement object to the same reporting configuration, as well as to link more than one reporting configuration to the same measurement object. The measurement identity is used as a reference number in the measurement report.

4. **Quantity configurations:** One quantity configuration is configured per RAT type. The quantity configuration defines the measurement quantities and associated filtering used for all event evaluation and related reporting of that measurement type. One filter can be configured per measurement quantity.

5. **Measurement gaps:** Periods that the UE may use to perform measurements, i.e. no (UL, DL) transmissions are scheduled.

E-UTRAN only configures a single measurement object for a given frequency, i.e. it is not possible to configure two or more measurement objects for the same frequency with different associated parameters, e.g. different offsets and/ or blacklists. E-UTRAN may configure multiple instances of the same event e.g. by configuring two reporting configurations with different thresholds.

The UE maintains a single measurement object list, a single reporting configuration list, and a single measurement identities list. The measurement object list includes measurement objects, that are specified per RAT type, possibly including intra-frequency object(s) (i.e. the object(s) corresponding to the serving frequency(ies)), inter-frequency object(s) and inter-RAT objects. Similarly, the reporting configuration list includes E-UTRA and inter-RAT reporting configurations. Any measurement object can be linked to any reporting configuration of the same RAT type. Some reporting configurations may not be linked to a measurement object. Likewise, some measurement objects may not be linked to a reporting configuration.

The measurement procedures distinguish the following types of cells:

1. The serving cell(s)– these are the PCell and one or more SCells, if configured for a UE supporting CA.

2. Listed cells - these are cells listed within the measurement object(s) or, for inter-RAT WLAN, the WLANs matching the WLAN identifiers configured in the measurement object or the WLAN the UE is connected to.

3. Detected cells - these are cells that are not listed within the measurement object(s) but are detected by the UE on the carrier frequency(ies) indicated by the measurement object(s).

For E-UTRA, the UE measures and reports on the serving cell(s), listed cells, detected cells and, for RSSI and channel occupancy measurements, the UE measures and reports on any reception on the indicated frequency. For inter-RAT UTRA, the UE measures and reports on listed cells and optionally on cells that are within a range for which reporting is allowed by E-UTRAN. For inter-RAT GERAN, the UE measures and reports on detected cells. For inter-RAT CDMA2000, the UE measures and reports on listed cells. For inter-RAT WLAN, the UE measures and reports on listed cells.

NOTE 2: For inter-RAT UTRA and CDMA2000, the UE measures and reports also on detected cells for the purpose of SON.

DAINGEAN_0001918

NOTE 3: This specification is based on the assumption that typically CSG cells of home deployment type are not indicated within the neighbour list. Furthermore, the assumption is that for non-home deployments, the physical cell identity is unique within the area of a large macro cell (i.e. as for UTRAN).

Whenever the procedural specification, other than contained in sub-clause 5.5.2, refers to a field it concerns a field included in the *VarMeasConfig* unless explicitly stated otherwise i.e. only the measurement configuration procedure covers the direct UE action related to the received *measConfig*.

5.5.2 Measurement configuration

5.5.2.1 General

E-UTRAN applies the procedure as follows:

- to ensure that, whenever the UE has a *measConfig*, it includes a *measObject* for each serving frequency;
- to configure at most one measurement identity using a reporting configuration with the *purpose* set to *reportCGI*;
- for serving frequencies, set the EARFCN within the corresponding *measObject* according to the band as used for reception/ transmission;

The UE shall:

1> if the received *measConfig* includes the *measObjectToRemoveList*:

2> perform the measurement object removal procedure as specified in 5.5.2.4;

1> if the received *measConfig* includes the *measObjectToAddModList*:

2> perform the measurement object addition/ modification procedure as specified in 5.5.2.5;

1> if the received *measConfig* includes the *reportConfigToRemoveList*:

2> perform the reporting configuration removal procedure as specified in 5.5.2.6;

1> if the received *measConfig* includes the *reportConfigToAddModList*:

2> perform the reporting configuration addition/ modification procedure as specified in 5.5.2.7;

1> if the received *measConfig* includes the *quantityConfig*:

2> perform the quantity configuration procedure as specified in 5.5.2.8;

1> if the received *measConfig* includes the *measIdToRemoveList*:

2> perform the measurement identity removal procedure as specified in 5.5.2.2;

1> if the received *measConfig* includes the *measIdToAddModList*:

2> perform the measurement identity addition/ modification procedure as specified in 5.5.2.3;

1> if the received *measConfig* includes the *measGapConfig*:

2> perform the measurement gap configuration procedure as specified in 5.5.2.9;

1> if the received *measConfig* includes the *s-Measure*:

2> set the parameter *s-Measure* within *VarMeasConfig* to the lowest value of the RSRP ranges indicated by the received value of *s-Measure*;

1> if the received *measConfig* includes the *preRegistrationInfoHRPD*:

2> forward the *preRegistrationInfoHRPD* to CDMA2000 upper layers;

1> if the received *measConfig* includes the *speedStatePars*:

DAINGEAN_0001919

2> set the parameter *speedStatePars* within *VarMeasConfig* to the received value of *speedStatePars*;

1> if the received *measConfig* includes the *allowInterruptions*:

2> set the parameter *allowInterruptions* within *VarMeasConfig* to the received value of *allowInterruptions*;

5.5.2.2 Measurement identity removal

The UE shall:

1> for each *measId* included in the received *measIdToRemoveList* that is part of the current UE configuration in *VarMeasConfig*:

2> remove the entry with the matching *measId* from the *measIdList* within the *VarMeasConfig*;

2> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

2> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

NOTE: The UE does not consider the message as erroneous if the *measIdToRemoveList* includes any *measId* value that is not part of the current UE configuration.

5.5.2.2a Measurement identity autonomous removal

The UE shall:

1> for each *measId* included in the *measIdList* within *VarMeasConfig*:

2> if the associated *reportConfig* concerns an event involving a serving cell while the concerned serving cell is not configured; or

2> if the associated *reportConfig* concerns an event involving a WLAN mobility set while the concerned WLAN mobility set is not configured:

3> remove the *measId* from the *measIdList* within the *VarMeasConfig*;

3> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

3> stop the periodical reporting timer if running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

NOTE 1: The above UE autonomous removal of *measId*'s applies only for measurement events A1, A2, A6, and also applies for events A3 and A5 if configured for PSCell and W2 and W3, if configured.

NOTE 2: When performed during re-establishment, the UE is only configured with a primary frequency (i.e. the SCell(s) and WLAN mobility set are released, if configured).

5.5.2.3 Measurement identity addition/ modification

E-UTRAN applies the procedure as follows:

- configure a *measId* only if the corresponding measurement object, the corresponding reporting configuration and the corresponding quantity configuration, are configured;

The UE shall:

1> for each *measId* included in the received *measIdToAddModList*:

2> if an entry with the matching *measId* exists in the *measIdList* within the *VarMeasConfig*:

3> replace the entry with the value received for this *measId*;

2> else:

3> add a new entry for this *measId* within the *VarMeasConfig*;

DAINGEAN_0001920

2> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

2> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

2> if the *triggerType* is set to *periodical* and the *purpose* is set to *reportCGI* in the *reportConfig* associated with this *measId*:

3> if the *measObject* associated with this *measId* concerns E-UTRA:

4> if the *si-RequestForHO* is included in the *reportConfig* associated with this *measId*:

5> if the UE is a category 0 UE according to TS 36.306 [5]:

6> start timer T321 with the timer value set to 190 ms for this *measId*;

5> else:

6> start timer T321 with the timer value set to 150 ms for this *measId*;

4> else:

5> start timer T321 with the timer value set to 1 second for this *measId*;

3> else if the *measObject* associated with this *measId* concerns UTRA:

4> if the *si-RequestForHO* is included in the *reportConfig* associated with this *measId*:

5> for UTRA FDD, start timer T321 with the timer value set to 2 seconds for this *measId*;

5> for UTRA TDD, start timer T321 with the timer value set to [1 second] for this *measId*;

4> else:

5> start timer T321 with the timer value set to 8 seconds for this *measId*;

3> else:

4> start timer T321 with the timer value set to 8 seconds for this *measId*;

5.5.2.4 Measurement object removal

The UE shall:

1> for each *measObjectId* included in the received *measObjectToRemoveList* that is part of the current UE configuration in *VarMeasConfig*:

2> remove the entry with the matching *measObjectId* from the *measObjectList* within the *VarMeasConfig*;

2> remove all *measId* associated with this *measObjectId* from the *measIdList* within the *VarMeasConfig*, if any;

2> if a *measId* is removed from the *measIdList:*

3> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

3> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

NOTE: The UE does not consider the message as erroneous if the *measObjectToRemoveList* includes any *measObjectId* value that is not part of the current UE configuration.

5.5.2.5 Measurement object addition/ modification

The UE shall:

1> for each *measObjectId* included in the received *measObjectToAddModList*:

DAINGEAN_0001921

2> if an entry with the matching *measObjectId* exists in the *measObjectList* within the *VarMeasConfig*, for this entry:

3> reconfigure the entry with the value received for this *measObject*, except for the fields *cellsToAddModList*, *blackCellsToAddModList*, *whiteCellsToAddModList, altTTT-CellsToAddModList, cellsToRemoveList, blackCellsToRemoveList, whiteCellsToRemoveList, altTTT-CellsToRemoveList*, *measSubframePatternConfigNeigh, measDS-Config, wlan-ToAddModList* and *wlan-ToRemoveList*;

3> if the received *measObject* includes the *cellsToRemoveList*:

4> for each *cellIndex* included in the *cellsToRemoveList*:

5> remove the entry with the matching *cellIndex* from the *cellsToAddModList*;

3> if the received *measObject* includes the *cellsToAddModList*:

4> for each *cellIndex* value included in the *cellsToAddModList*:

5> if an entry with the matching *cellIndex* exists in the *cellsToAddModList*:

6> replace the entry with the value received for this *cellIndex*;

5> else:

6> add a new entry for the received *cellIndex* to the *cellsToAddModList*;

3> if the received *measObject* includes the *blackCellsToRemoveList*:

4> for each *cellIndex* included in the *blackCellsToRemoveList*:

5> remove the entry with the matching *cellIndex* from the *blackCellsToAddModList*;

NOTE 1: For each *cellIndex* included in the *blackCellsToRemoveList* that concerns overlapping ranges of cells, a cell is removed from the black list of cells only if all cell indexes containing it are removed.

3> if the received *measObject* includes the *blackCellsToAddModList*:

4> for each *cellIndex* included in the *blackCellsToAddModList*:

5> if an entry with the matching *cellIndex* is included in the *blackCellsToAddModList*:

6> replace the entry with the value received for this *cellIndex*;

5> else:

6> add a new entry for the received *cellIndex* to the *blackCellsToAddModList*;

3> if the received *measObject* includes the *whiteCellsToRemoveList*:

4> for each *cellIndex* included in the *whiteCellsToRemoveList*:

5> remove the entry with the matching *cellIndex* from the *whiteCellsToAddModList*;

NOTE 2: For each *cellIndex* included in the *whiteCellsToRemoveList* that concerns overlapping ranges of cells, a cell is removed from the white list of cells only if all cell indexes containing it are removed.

3> if the received *measObject* includes the *whiteCellsToAddModList*:

4> for each *cellIndex* included in the *whiteCellsToAddModList*:

5> if an entry with the matching *cellIndex* is included in the *whiteCellsToAddModList*:

6> replace the entry with the value received for this *cellIndex*;

5> else:

6> add a new entry for the received *cellIndex* to the *whiteCellsToAddModList*;

DAINGEAN_0001922

3> if the received *measObject* includes the *altTTT-CellsToRemoveList*:

4> for each *cellIndex* included in the *altTTT-CellsToRemoveList*:

5> remove the entry with the matching *cellIndex* from the *altTTT-CellsToAddModList*;

NOTE 3: For each *cellIndex* included in the *altTTT-CellsToRemoveList* that concerns overlapping ranges of cells, a cell is removed from the list of cells only if all cell indexes containing it are removed.

3> if the received *measObject* includes the *altTTT-CellsToAddModList*:

4> for each *cellIndex* value included in the *altTTT-CellsToAddModList*:

5> if an entry with the matching *cellIndex* exists in the *altTTT-CellsToAddModList*:

6> replace the entry with the value received for this *cellIndex*;

5> else:

6> add a new entry for the received *cellIndex* to the *altTTT-CellsToAddModList*;

3> if the received *measObject* includes *measSubframePatternConfigNeigh*:

4> set *measSubframePatternConfigNeigh* within the *VarMeasConfig* to the value of the received field

3> if the received *measObject* includes *measDS-Config*:

4> if *measDS-Config* is set to *setup*:

5> if the received *measDS-Config* includes the *measCSI-RS-ToRemoveList*:

6> for each *measCSI-RS-Id* included in the *measCSI-RS-ToRemoveList*:

7> remove the entry with the matching *measCSI-RS-Id* from the *measCSI-RS-ToAddModList*;

5> if the received *measDS-Config* includes the *measCSI-RS-ToAddModList*, for each *measCSI-RS-Id* value included in the *measCSI-RS-ToAddModList*:

6> if an entry with the matching *measCSI-RS-Id* exists in the *measCSI-RS-ToAddModList*:

7> replace the entry with the value received for this *measCSI-RS-Id*;

6> else:

7> add a new entry for the received *measCSI-RS-Id* to the *measCSI-RS-ToAddModList*;

5> set other fields of the *measDS-Config* within the *VarMeasConfig* to the value of the received fields;

5> perform the discovery signals measurement timing configuration procedure as specified in 5.5.2.10;

4> else:

5> release the discovery signals measurement configuration;

3> for each *measId* associated with this *measObjectId* in the *measIdList* within the *VarMeasConfig*, if any:

4> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

4> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

3> if the received *measObject* includes the *wlan-ToAddModList*:

4> for each *WLAN-Identifiers* included in the *wlan-ToAddModList*:

5> add a new entry for the received *WLAN-Identifiers* to the *wlan-ToAddModList*;

DAINGEAN_0001923

3> if the received *measObject* includes the *wlan-ToRemoveList*:

4> for each *WLAN-Identifiers* included in the *wlan-ToRemoveList*:

5> remove the new entry with the matching *WLAN-Identifiers* from the *wlan-ToAddModList*;

NOTE 3a: Matching of *WLAN-Identifiers* requires that all WLAN identitifier fields should be same.

2> else:

3> add a new entry for the received *measObject* to the *measObjectList* within *VarMeasConfig*;

NOTE 4: UE does not need to retain *cellForWhichToReportCGI* in the *measObject* after reporting *cgi-Info*.

5.5.2.6 Reporting configuration removal

The UE shall:

1> for each *reportConfigId* included in the received *reportConfigToRemoveList* that is part of the current UE configuration in *VarMeasConfig*:

2> remove the entry with the matching *reportConfigId* from the *reportConfigList* within the *VarMeasConfig*;

2> remove all *measId* associated with the *reportConfigId* from the *measIdList* within the *VarMeasConfig*, if any;

2> if a *measId* is removed from the *measIdList*:

3> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

3> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

NOTE: The UE does not consider the message as erroneous if the *reportConfigToRemoveList* includes any *reportConfigId* value that is not part of the current UE configuration.

5.5.2.7 Reporting configuration addition/ modification

The UE shall:

1> for each *reportConfigId* included in the received *reportConfigToAddModList*:

2> if an entry with the matching *reportConfigId* exists in the *reportConfigList* within the *VarMeasConfig*, for this entry:

3> reconfigure the entry with the value received for this *reportConfig*;

3> for each *measId* associated with this *reportConfigId* included in the *measIdList* within the *VarMeasConfig*, if any:

4> remove the measurement reporting entry for this *measId* from in *VarMeasReportList*, if included;

4> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

2> else:

3> add a new entry for the received *reportConfig* to the *reportConfigList* within the *VarMeasConfig*;

5.5.2.8 Quantity configuration

The UE shall:

1> for each RAT for which the received *quantityConfig* includes parameter(s):

2> set the corresponding parameter(s) in *quantityConfig* within *VarMeasConfig* to the value of the received *quantityConfig* parameter(s);

DAINGEAN_0001924

1> for each *measId* included in the *measIdList* within *VarMeasConfig*:

2> remove the measurement reporting entry for this *measId* from the *VarMeasReportList*, if included;

2> stop the periodical reporting timer or timer T321, whichever one is running, and reset the associated information (e.g. *timeToTrigger*) for this *measId*;

5.5.2.9 Measurement gap configuration

The UE shall:

1> if *measGapConfig* is set to *setup*:

2> if a measurement gap configuration is already setup, release the measurement gap configuration;

2> setup the measurement gap configuration indicated by the *measGapConfig* in accordance with the received *gapOffset*, i.e., the first subframe of each gap occurs at an SFN and subframe meeting the following condition (SFN and subframe of MCG cells):

SFN mod T = FLOOR(*gapOffset*/10);

subframe = *gapOffset* mod 10;

with T = MGRP/10 as defined in TS 36.133 [16];

NOTE: The UE applies a single gap, which timing is relative to the MCG cells, even when configured with DC.

1> else:

2> release the measurement gap configuration;

5.5.2.10 Discovery signals measurement timing configuration

The UE shall setup the discovery signals measurement timing configuration (DMTC) in accordance with the received *dmtc-PeriodOffset*, i.e., the first subframe of each DMTC occasion occurs at an SFN and subframe of the PCell meeting the following condition:

SFN mod T = FLOOR(*dmtc-Offset*/10);

subframe = *dmtc-Offset* mod 10;

with T = *dmtc-Periodicity*/10;

On the concerned frequency, the UE shall not consider discovery signals transmission in subframes outside the DMTC occasion.

5.5.2.11 RSSI measurement timing configuration

The UE shall setup the RSSI measurement timing configuraton (RMTC) in accordance with the received *rmtc-Period*, *rmtc-SubframeOffset* if configured otherwise determined by the UE randomly, i.e. the first symbol of each RMTC occasion occurs at first symbol of an SFN and subframe of the PCell meeting the following condition:

SFN mod T = FLOOR(*rmtc-SubframeOffset*/10);

subframe = *rmtc-SubframeOffset* mod 10;

with T = *rmtc-Period*/10;

On the concerned frequency, the UE shall not consider RSSI measurements outside the configured RMTC occasion which lasts for *measDuration* for RSSI and channel occupancy measurements.

DAINGEAN_0001925

5.5.3 Performing measurements

5.5.3.1 General

For all measurements, except for UE Rx–Tx time difference measurements, RSSI, UL PDCP Packet Delay per QCI measurement, channel occupancy measurements, and except for WLAN measurements of Band, Carrier Info, Available Admission Capacity, Backhaul Bandwidth, Channel Utilization, and Station Count, the UE applies the layer 3 filtering as specified in 5.5.3.2, before using the measured results for evaluation of reporting criteria or for measurement reporting.

The UE shall:

1> whenever the UE has a *measConfig*, perform RSRP and RSRQ measurements for each serving cell as follows:

2> for the PCell, apply the time domain measurement resource restriction in accordance with *measSubframePatternPCell,* if configured;

2> if the UE supports CRS based discovery signals measurement:

3> for each SCell in deactivated state, apply the discovery signals measurement timing configuration in accordance with *measDS-Config*, if configured within the *measObject* corresponding to the frequency of the SCell;

1> if the UE has a *measConfig* with *rs-sinr-Config* configured, perform RS-SINR (as indicated in the associated *reportConfig*) measurements as follows:

2> perform the corresponding measurements on the frequency indicated in the associated *measObject* using available idle periods or using autonomous gaps as necessary;

1> for each *measId* included in the *measIdList* within *VarMeasConfig*:

2> if the *purpose* for the associated *reportConfig* is set to *reportCGI*:

3> if *si-RequestForHO* is configured for the associated *reportConfig*:

4> perform the corresponding measurements on the frequency and RAT indicated in the associated *measObject* using autonomous gaps as necessary;

3> else:

4> perform the corresponding measurements on the frequency and RAT indicated in the associated *measObject* using available idle periods or using autonomous gaps as necessary;

NOTE 1: If autonomous gaps are used to perform measurements, the UE is allowed to temporarily abort communication with all serving cell(s), i.e. create autonomous gaps to perform the corresponding measurements within the limits specified in TS 36.133 [16]. Otherwise, the UE only supports the measurements with the purpose set to *reportCGI* only if E-UTRAN has provided sufficient idle periods.

3> try to acquire the global cell identity of the cell indicated by the *cellForWhichToReportCGI* in the associated *measObject* by acquiring the relevant system information from the concerned cell;

3> if the cell indicated by the *cellForWhichToReportCGI* included in the associated *measObject* is an E-UTRAN cell:

4> try to acquire the CSG identity, if the CSG identity is broadcast in the concerned cell;

4> try to acquire the *trackingAreaCode* in the concerned cell;

4> try to acquire the list of additional PLMN Identities, as included in the *plmn-IdentityList*, if multiple PLMN identities are broadcast in the concerned cell;

4> if the *includeMultiBandInfo* is configured:

5> try to acquire the *freqBandIndicator* in the *SystemInformationBlockType1*of the concerned cell;

DAINGEAN_0001926

5> try to acquire the list of additional frequency band indicators, as included in the *multiBandInfoList*, if multiple frequency band indicators are included in the *SystemInformationBlockType1* of the concerned cell;

5> try to acquire the *freqBandIndicatorPriority*, if the *freqBandIndicatorPriority* is included in the *SystemInformationBlockType1* of the concerned cell;

NOTE 2: The 'primary' PLMN is part of the global cell identity.

3> if the cell indicated by the *cellForWhichToReportCGI* included in the associated *measObject* is a UTRAN cell:

4> try to acquire the LAC, the RAC and the list of additional PLMN Identities, if multiple PLMN identities are broadcast in the concerned cell;

4> try to acquire the CSG identity, if the CSG identity is broadcast in the concerned cell;

3> if the cell indicated by the *cellForWhichToReportCGI* included in the associated *measObject* is a GERAN cell:

4> try to acquire the RAC in the concerned cell;

3> if the cell indicated by the *cellForWhichToReportCGI* included in the associated *measObject* is a CDMA2000 cell and the *cdma2000-Type* included in the *measObject* is *typeHRPD*:

4> try to acquire the Sector ID in the concerned cell;

3> if the cell indicated by the *cellForWhichToReportCGI* included in the associated *measObject* is a CDMA2000 cell and the *cdma2000-Type* included in the *measObject* is *type1XRTT*:

4> try to acquire the BASE ID, SID and NID in the concerned cell;

2> if the *ul-DelayConfig* is configured for the associated *reportConfig*:

3> ignore the *measObject*;

3> configure the PDCP layer to perform UL PDCP Packet Delay per QCI measurement;

2> else:

3> if a measurement gap configuration is setup; or

3> if the UE does not require measurement gaps to perform the concerned measurements:

4> if *s-Measure* is not configured; or

4> if *s-Measure* is configured and the PCell RSRP, after layer 3 filtering, is lower than this value; or

4> if *measDS-Config* is configured in the associated *measObject*:

5> if the UE supports CSI-RS based discovery signals measurement; and

5> if the *eventId* in the associated *reportConfig* is set to *eventC1* or *eventC2*, or if *reportStrongestCSI-RSs* is included in the associated *reportConfig*:

6> perform the corresponding measurements of CSI-RS resources on the frequency indicated in the concerned *measObject*, applying the discovery signals measurement timing configuration in accordance with *measDS-Config* in the concerned *measObject*;

6> if *reportCRS-Meas* is included in the associated *reportConfig,* perform the corresponding measurements of neighbouring cells on the frequencies indicated in the concerned *measObject* as follows:

7> for neighbouring cells on the primary frequency, apply the time domain measurement resource restriction in accordance with *measSubframePatternConfigNeigh,* if configured in the concerned *measObject*;

DAINGEAN_0001927

7> apply the discovery signals measurement timing configuration in accordance with *measDS-Config* in the concerned *measObject*;

5> else:

6> perform the corresponding measurements of neighbouring cells on the frequencies and RATs indicated in the concerned *measObject* as follows:

7> for neighbouring cells on the primary frequency, apply the time domain measurement resource restriction in accordance with *measSubframePatternConfigNeigh,* if configured in the concerned *measObject*;

7> if the UE supports CRS based discovery signals measurement, apply the discovery signals measurement timing configuration in accordance with *measDS-Config*, if configured in the concerned *measObject*;

4> if the *ue-RxTxTimeDiffPeriodical* is configured in the associated *reportConfig*:

5> perform the UE Rx–Tx time difference measurements on the PCell;

4> if the *reportSSTD-Meas* is set to *true* in the associated *reportConfig*:

5> perform SSTD measurements between the PCell and the PSCell;

4> if the *measRSSI-ReportConfig* is configured in the associated *reportConfig*:

5> perform the RSSI and channel occupancy measurements on the frequency indicated in the associated *measObject*;

2> perform the evaluation of reporting criteria as specified in 5.5.4;

NOTE 3: The *s-Measure* defines when the UE is required to perform measurements. The UE is however allowed to perform measurements also when the PCell RSRP exceeds *s-Measure*, e.g., to measure cells broadcasting a CSG identity following use of the autonomous search function as defined in TS 36.304 [4].

NOTE 4: The UE may not perform the WLAN measurements it is configured with e.g. due to connection to another WLAN based on user preferences as specified in TS 23.402 [75] or due to turning off WLAN.

5.5.3.2 Layer 3 filtering

The UE shall:

1> for each measurement quantity that the UE performs measurements according to 5.5.3.1:

NOTE 1: This does not include quantities configured solely for UE Rx-Tx time difference, SSTD measurements and RSSI, channel occupancy measurements, WLAN measurements of Band, Carrier Info, Available Admission Capacity, Backhaul Bandwidth, Channel Utilization, and Station Count, and UL PDCP Packet Delay per QCI measurement i.e. for those types of measurements the UE ignores the *triggerQuantity* and *reportQuantity*.

2> filter the measured result, before using for evaluation of reporting criteria or for measurement reporting, by the following formula:

$$F_n = (1-a) \cdot F_{n-1} + a \cdot M_n$$

where

M_n is the latest received measurement result from the physical layer;

F_n is the updated filtered measurement result, that is used for evaluation of reporting criteria or for measurement reporting;

F_{n-1} is the old filtered measurement result, where F_0 is set to M_1 when the first measurement result from the physical layer is received; and

DAINGEAN_0001928

$a = 1/2^{(k/4)}$, where k is the *filterCoefficient* for the corresponding measurement quantity received by the *quantityConfig*;

2> adapt the filter such that the time characteristics of the filter are preserved at different input rates, observing that the *filterCoefficient* k assumes a sample rate equal to 200 ms;

NOTE 2: If k is set to 0, no layer 3 filtering is applicable.

NOTE 3: The filtering is performed in the same domain as used for evaluation of reporting criteria or for measurement reporting, i.e., logarithmic filtering for logarithmic measurements.

NOTE 4: The filter input rate is implementation dependent, to fulfil the performance requirements set in [16]. For further details about the physical layer measurements, see TS 36.133 [16].

5.5.4 Measurement report triggering

5.5.4.1 General

If security has been activated successfully, the UE shall:

1> for each *measId* included in the *measIdList* within *VarMeasConfig*:

2> if the corresponding *reportConfig* includes a purpose set to *reportStrongestCellsForSON*:

3> consider any neighbouring cell detected on the associated frequency to be applicable;

2> else if the corresponding *reportConfig* includes a purpose set to *reportCGI*:

3> consider any neighbouring cell detected on the associated frequency/ set of frequencies (GERAN) which has a physical cell identity matching the value of the *cellForWhichToReportCGI* included in the corresponding *measObject* within the *VarMeasConfig* to be applicable;

2> else:

3> if the corresponding *measObject* concerns E-UTRA:

4> if the *ue-RxTxTimeDiffPeriodical* is configured in the corresponding *reportConfig*:

5> consider only the PCell to be applicable;

4> else if the *reportSSTD-Meas* is set to *true* in the corresponding *reportConfig*:

5> consider the PSCell to be applicable;

4> else if the *eventA1* or *eventA2* is configured in the corresponding *reportConfig*:

5> consider only the serving cell to be applicable;

4> else if *eventC1* or *eventC2* is configured in the corresponding *reportConfig*; or if *reportStrongestCSI-RSs* is included in the corresponding *reportConfig*:

5> consider a CSI-RS resource on the associated frequency to be applicable when the concerned CSI-RS resource is included in the *measCSI-RS-ToAddModList* defined within the *VarMeasConfig* for this *measId*;

4> else if *measRSSI-ReportConfig* is configured in the corresponding *reportConfig*:

5> consider the resource indicated by the *rmtc-Config* on the associated frequency to be applicable;

4> else:

5> if *useWhiteCellList* is set to *TRUE*:

6> consider any neighbouring cell detected on the associated frequency to be applicable when the concerned cell is included in the *whiteCellsToAddModList* defined within the *VarMeasConfig* for this *measId*;

DAINGEAN_0001929

5> else:

6> consider any neighbouring cell detected on the associated frequency to be applicable when the concerned cell is not included in the *blackCellsToAddModList* defined within the *VarMeasConfig* for this *measId*;

5> for events involving a serving cell on one frequency and neighbours on another frequency, consider the serving cell on the other frequency as a neighbouring cell;

4> if the corresponding *reportConfig* includes *alternativeTimeToTrigger* and if the UE supports *alternativeTimeToTrigger*:

5> use the value of *alternativeTimeToTrigger* as the time to trigger instead of the value of *timeToTrigger* in the corresponding *reportConfig* for cells included in the *altTTT-CellsToAddModList* of the corresponding *measObject*;

3> else if the corresponding *measObject* concerns UTRA or CDMA2000:

4> consider a neighbouring cell on the associated frequency to be applicable when the concerned cell is included in the *cellsToAddModList* defined within the *VarMeasConfig* for this *measId* (i.e. the cell is included in the white-list);

NOTE 0: The UE may also consider a neighbouring cell on the associated UTRA frequency to be applicable when the concerned cell is included in the *csg-allowedReportingCells* within the *VarMeasConfig* for this *measId*, if configured in the corresponding *measObjectUTRA* (i.e. the cell is included in the range of physical cell identities for which reporting is allowed).

3> else if the corresponding *measObject* concerns GERAN:

4> consider a neighbouring cell on the associated set of frequencies to be applicable when the concerned cell matches the *ncc-Permitted* defined within the *VarMeasConfig* for this *measId*;

3> else if the corresponding measObject concerns WLAN:

4> consider a WLAN on the associated set of frequencies, as indicated by *carrierFreq* or on all WLAN frequencies when *carrierFreq* is not present, to be applicable if the WLAN matches all WLAN identifiers of at least one entry within *wlan-Id-List* for this *measId*;

2> if the *triggerType* is set to *event* and if the entry condition applicable for this event, i.e. the event corresponding with the *eventId* of the corresponding *reportConfig* within *VarMeasConfig*, is fulfilled for one or more applicable cells for all measurements after layer 3 filtering taken during *timeToTrigger* defined for this event within the *VarMeasConfig*, while the *VarMeasReportList* does not include an measurement reporting entry for this *measId* (a first cell triggers the event):

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> include the concerned cell(s) in the *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> if the UE supports T312 and if *useT312* is included for this event and if T310 is running:

4> if T312 is not running:

5> start timer T312 with the value configured in the corresponding *measObject*;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> if the *triggerType* is set to *event* and if the entry condition applicable for this event, i.e. the event corresponding with the *eventId* of the corresponding *reportConfig* within *VarMeasConfig*, is fulfilled for one or more applicable cells not included in the *cellsTriggeredList* for all measurements after layer 3 filtering taken during *timeToTrigger* defined for this event within the *VarMeasConfig* (a subsequent cell triggers the event):

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

DAINGEAN_0001930

3> include the concerned cell(s) in the *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> if the UE supports T312 and if *useT312* is included for this event and if T310 is running:

4> if T312 is not running:

5> start timer T312 with the value configured in the corresponding *measObject*;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> if the *triggerType* is set to *event* and if the leaving condition applicable for this event is fulfilled for one or more of the cells included in the *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId* for all measurements after layer 3 filtering taken during *timeToTrigger* defined within the *VarMeasConfig* for this event:

3> remove the concerned cell(s) in the *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> if the UE supports T312 and if *useT312* is included for this event and if T310 is running:

4> if T312 is not running:

5> start timer T312 with the value configured in the corresponding *measObject*;

3> if *reportOnLeave* is set to *TRUE* for the corresponding reporting configuration or if *a6-ReportOnLeave* is set to *TRUE* for the corresponding reporting configuration:

4> initiate the measurement reporting procedure, as specified in 5.5.5;

3> if the *cellsTriggeredList* defined within the *VarMeasReportList* for this *measId* is empty:

4> remove the measurement reporting entry within the *VarMeasReportList* for this *measId*;

4> stop the periodical reporting timer for this *measId*, if running;

2> if the *triggerType* is set to *event* and if the entry condition applicable for this event, i.e. the event corresponding with the *eventId* of the corresponding *reportConfig* within *VarMeasConfig*, is fulfilled for one or more applicable CSI-RS resources for all measurements after layer 3 filtering taken during *timeToTrigger* defined for this event within the *VarMeasConfig*, while the *VarMeasReportList* does not include an measurement reporting entry for this *measId* (i.e. a first CSI-RS resource triggers the event):

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> include the concerned CSI-RS resource(s) in the *csi-RS-TriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> if the *triggerType* is set to *event* and if the entry condition applicable for this event, i.e. the event corresponding with the *eventId* of the corresponding *reportConfig* within *VarMeasConfig*, is fulfilled for one or more applicable CSI-RS resources not included in the *csi-RS-TriggeredList* for all measurements after layer 3 filtering taken during *timeToTrigger* defined for this event within the *VarMeasConfig* (i.e. a subsequent CSI-RS resource triggers the event):

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> include the concerned CSI-RS resource(s) in the *csi-RS-TriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> if the *triggerType* is set to *event* and if the leaving condition applicable for this event is fulfilled for one or more of the CSI-RS resources included in the *csi-RS-TriggeredList* defined within the *VarMeasReportList* for

DAINGEAN_0001931

this *measId* for all measurements after layer 3 filtering taken during *timeToTrigger* defined within the *VarMeasConfig* for this event:

3> remove the concerned CSI-RS resource(s) in the *csi-RS-TriggeredList* defined within the *VarMeasReportList* for this *measId*;

3> if *c1-ReportOnLeave* is set to *TRUE* for the corresponding reporting configuration or if *c2-ReportOnLeave* is set to *TRUE* for the corresponding reporting configuration:

4> initiate the measurement reporting procedure, as specified in 5.5.5;

3> if the *csi-RS-TriggeredList* defined within the *VarMeasReportList* for this *measId* is empty:

4> remove the measurement reporting entry within the *VarMeasReportList* for this *measId*;

4> stop the periodical reporting timer for this *measId*, if running;

2> if *measRSSI-ReportConfig* is included and if a (first) measurement result is available:

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> initiate the measurement reporting procedure as specified in 5.5.5 immediately when RSSI sample values are reported by the physical layer after the first L1 measurement duration;

2> else if the *purpose* is included and set to *reportStrongestCells* or to *reportStrongestCellsForSON* and if a (first) measurement result is available:

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> if the *purpose* is set to *reportStrongestCells* and *reportStrongestCSI-RSs* is not included:

4> if the *triggerType* is set to *periodical* and the corresponding *reportConfig* includes the *ul-DelayConfig*:

5> initiate the measurement reporting procedure, as specified in 5.5.5, immediately after a first measurement result is provided by lower layers;

4> else if the *reportAmount* exceeds 1:

5> initiate the measurement reporting procedure, as specified in 5.5.5, immediately after the quantity to be reported becomes available for the PCell;

4> else (i.e. the *reportAmount* is equal to 1):

5> initiate the measurement reporting procedure, as specified in 5.5.5, immediately after the quantity to be reported becomes available for the PCell and for the strongest cell among the applicable cells, or becomes available for the pair of PCell and the PSCell in case of SSTD measurements;

3> else:

4> initiate the measurement reporting procedure, as specified in 5.5.5, when it has determined the strongest cells on the associated frequency;

2> upon expiry of the periodical reporting timer for this *measId*:

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> if the *purpose is* included and set to *reportCGI* and if the UE acquired the information needed to set all fields of *cgi-Info* for the requested cell:

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

DAINGEAN_0001932

3> stop timer T321;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

2> upon expiry of the T321 for this *measId*:

3> include a measurement reporting entry within the *VarMeasReportList* for this *measId*;

3> set the *numberOfReportsSent* defined within the *VarMeasReportList* for this *measId* to 0;

3> initiate the measurement reporting procedure, as specified in 5.5.5;

NOTE 2: The UE does not stop the periodical reporting with *triggerType* set to *event* or to *periodical* while the corresponding measurement is not performed due to the PCell RSRP being equal to or better than *s-Measure* or due to the measurement gap not being setup.

NOTE 3: If the UE is configured with DRX, the UE may delay the measurement reporting for event triggered and periodical triggered measurements until the Active Time, which is defined in TS 36.321 [6].

5.5.4.2 Event A1 (Serving becomes better than threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition A1-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A1-2, as specified below, is fulfilled;

1> for this measurement, consider the primary or secondary cell that is configured on the frequency indicated in the associated *measObjectEUTRA* to be the serving cell;

Inequality A1-1 (Entering condition)

$Ms - Hys > Thresh$

Inequality A1-2 (Leaving condition)

$Ms + Hys < Thresh$

The variables in the formula are defined as follows:

Ms is the measurement result of the serving cell, not taking into account any offsets.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Thresh is the threshold parameter for this event (i.e. *a1-Threshold* as defined within *reportConfigEUTRA* for this event).

Ms is expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Hys is expressed in dB.

Thresh is expressed in the same unit as ***Ms***.

5.5.4.3 Event A2 (Serving becomes worse than threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition A2-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A2-2, as specified below, is fulfilled;

1> for this measurement, consider the primary or secondary cell that is configured on the frequency indicated in the associated *measObjectEUTRA* to be the serving cell;

Inequality A2-1 (Entering condition)

DAINGEAN_0001933

$Ms + Hys < Thresh$

Inequality A2-2 (Leaving condition)

$Ms - Hys > Thresh$

The variables in the formula are defined as follows:

Ms is the measurement result of the serving cell, not taking into account any offsets.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Thresh is the threshold parameter for this event (i.e. *a2-Threshold* as defined within *reportConfigEUTRA* for this event).

Ms is expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Hys is expressed in dB.

Thresh is expressed in the same unit as ***Ms***.

5.5.4.4 Event A3 (Neighbour becomes offset better than PCell/ PSCell)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition A3-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A3-2, as specified below, is fulfilled;

1> if *usePSCell* of the corresponding *reportConfig* is set to *true*:

2> use the PSCell for *Mp*, *Ofp and Ocp*;

1> else:

2> use the PCell for *Mp*, *Ofp and Ocp*;

NOTE The cell(s) that triggers the event is on the frequency indicated in the associated *measObject* which may be different from the frequency used by the PCell/ PSCell.

Inequality A3-1 (Entering condition)

$Mn + Ofn + Ocn - Hys > Mp + Ofp + Ocp + Off$

Inequality A3-2 (Leaving condition)

$Mn + Ofn + Ocn + Hys < Mp + Ofp + Ocp + Off$

The variables in the formula are defined as follows:

Mn is the measurement result of the neighbouring cell, not taking into account any offsets.

Ofn is the frequency specific offset of the frequency of the neighbour cell (i.e. *offsetFreq* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell).

Ocn is the cell specific offset of the neighbour cell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell), and set to zero if not configured for the neighbour cell.

Mp is the measurement result of the PCell/ PSCell, not taking into account any offsets.

Ofp is the frequency specific offset of the frequency of the PCell/ PSCell (i.e. *offsetFreq* as defined within *measObjectEUTRA* corresponding to the frequency of the PCell/ PSCell).

Ocp is the cell specific offset of the PCell/ PSCell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the PCell/ PSCell), and is set to zero if not configured for the PCell/ PSCell.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

DAINGEAN_0001934

Off is the offset parameter for this event (i.e. *a3-Offset* as defined within *reportConfigEUTRA* for this event).

Mn, Mp are expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Ofn, ***Ocn***, ***Ofp***, ***Ocp***, ***Hys***, ***Off*** are expressed in dB.

5.5.4.5 Event A4 (Neighbour becomes better than threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition A4-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A4-2, as specified below, is fulfilled;

Inequality A4-1 (Entering condition)

$$Mn + Ofn + Ocn - Hys > Thresh$$

Inequality A4-2 (Leaving condition)

$$Mn + Ofn + Ocn + Hys < Thresh$$

The variables in the formula are defined as follows:

Mn is the measurement result of the neighbouring cell, not taking into account any offsets.

Ofn is the frequency specific offset of the frequency of the neighbour cell (i.e. *offsetFreq* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell).

Ocn is the cell specific offset of the neighbour cell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell), and set to zero if not configured for the neighbour cell.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Thresh is the threshold parameter for this event (i.e. *a4-Threshold* as defined within *reportConfigEUTRA* for this event).

Mn is expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Ofn, Ocn, Hys are expressed in dB.

Thresh is expressed in the same unit as ***Mn***.

5.5.4.6 Event A5 (PCell/ PSCell becomes worse than threshold1 and neighbour becomes better than threshold2)

The UE shall:

1> consider the entering condition for this event to be satisfied when both condition A5-1 and condition A5-2, as specified below, are fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A5-3 or condition A5-4, i.e. at least one of the two, as specified below, is fulfilled;

1> if *usePSCell* of the corresponding *reportConfig* is set to *true*:

2> use the PSCell for *Mp*;

1> else:

2> use the PCell for *Mp*;

NOTE: The cell(s) that triggers the event is on the frequency indicated in the associated *measObject* which may be different from the frequency used by the PCell/ PSCell.

Inequality A5-1 (Entering condition 1)

DAINGEAN_0001935

$Mp + Hys < Thresh1$

Inequality A5-2 (Entering condition 2)

$Mn + Ofn + Ocn - Hys > Thresh2$

Inequality A5-3 (Leaving condition 1)

$Mp - Hys > Thresh1$

Inequality A5-4 (Leaving condition 2)

$Mn + Ofn + Ocn + Hys < Thresh2$

The variables in the formula are defined as follows:

Mp is the measurement result of the PCell/ PSCell, not taking into account any offsets.

Mn is the measurement result of the neighbouring cell, not taking into account any offsets.

Ofn is the frequency specific offset of the frequency of the neighbour cell (i.e. *offsetFreq* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell).

Ocn is the cell specific offset of the neighbour cell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell), and set to zero if not configured for the neighbour cell.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Thresh1 is the threshold parameter for this event (i.e. *a5-Threshold1* as defined within *reportConfigEUTRA* for this event).

Thresh2 is the threshold parameter for this event (i.e. *a5-Threshold2* as defined within *reportConfigEUTRA* for this event).

Mn, Mp are expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Ofn, Ocn, Hys are expressed in dB.

Thresh1 is expressed in the same unit as ***Mp***.

Thresh2 is expressed in the same unit as ***Mn***.

5.5.4.6a Event A6 (Neighbour becomes offset better than SCell)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition A6-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition A6-2, as specified below, is fulfilled;

1> for this measurement, consider the (secondary) cell that is configured on the frequency indicated in the associated *measObjectEUTRA* to be the serving cell;

NOTE: The neighbour(s) is on the same frequency as the SCell i.e. both are on the frequency indicated in the associated *measObject*.

Inequality A6-1 (Entering condition)

$Mn + Ocn - Hys > Ms + Ocs + Off$

Inequality A6-2 (Leaving condition)

$Mn + Ocn + Hys < Ms + Ocs + Off$

The variables in the formula are defined as follows:

Mn is the measurement result of the neighbouring cell, not taking into account any offsets.

DAINGEAN_0001936

Ocn is the cell specific offset of the neighbour cell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the neighbour cell), and set to zero if not configured for the neighbour cell.

Ms is the measurement result of the serving cell, not taking into account any offsets.

Ocs is the cell specific offset of the serving cell (i.e. *cellIndividualOffset* as defined within *measObjectEUTRA* corresponding to the serving frequency), and is set to zero if not configured for the serving cell.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Off is the offset parameter for this event (i.e. *a6-Offset* as defined within *reportConfigEUTRA* for this event).

Mn, Ms are expressed in dBm in case of RSRP, or in dB in case of RSRQ and RS-SINR.

Ocn, Ocs, Hys, Off are expressed in dB.

5.5.4.7 Event B1 (Inter RAT neighbour becomes better than threshold)

The UE shall:

1> for UTRA and CDMA2000, only trigger the event for cells included in the corresponding measurement object;

1> consider the entering condition for this event to be satisfied when condition B1-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition B1-2, as specified below, is fulfilled;

Inequality B1-1 (Entering condition)

$$Mn + Ofn - Hys > Thresh$$

Inequality B1-2 (Leaving condition)

$$Mn + Ofn + Hys < Thresh$$

The variables in the formula are defined as follows:

Mn is the measurement result of the inter-RAT neighbour cell, not taking into account any offsets. For CDMA 2000 measurement result, *pilotStrength* is divided by -2.

Ofn is the frequency specific offset of the frequency of the inter-RAT neighbour cell (i.e. *offsetFreq* as defined within the *measObject* corresponding to the frequency of the neighbour inter-RAT cell).

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigInterRAT* for this event).

Thresh is the threshold parameter for this event (i.e. *b1-Threshold* as defined within *reportConfigInterRAT* for this event). For CDMA2000, *b1-Threshold* is divided by -2.

Mn is expressed in dBm or in dB, depending on the measurement quantity of the inter-RAT neighbour cell.

Ofn, Hys are expressed in dB.

Thresh is expressed in the same unit as ***Mn***.

5.5.4.8 Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2)

The UE shall:

1> for UTRA and CDMA2000, only trigger the event for cells included in the corresponding measurement object;

1> consider the entering condition for this event to be satisfied when both condition B2-1 and condition B2-2, as specified below, are fulfilled;

1> consider the leaving condition for this event to be satisfied when condition B2-3 or condition B2-4, i.e. at least one of the two, as specified below, is fulfilled;

DAINGEAN_0001937

Inequality B2-1 (Entering condition 1)

$Mp + Hys < Thresh1$

Inequality B2-2 (Entering condition 2)

$Mn + Ofn - Hys > Thresh2$

Inequality B2-3 (Leaving condition 1)

$Mp - Hys > Thresh1$

Inequality B2-4 (Leaving condition 2)

$Mn + Ofn + Hys < Thresh2$

The variables in the formula are defined as follows:

Mp is the measurement result of the PCell, not taking into account any offsets.

Mn is the measurement result of the inter-RAT neighbour cell, not taking into account any offsets. For CDMA2000 measurement result, *pilotStrength* is divided by -2.

Ofn is the frequency specific offset of the frequency of the inter-RAT neighbour cell (i.e. *offsetFreq* as defined within the *measObject* corresponding to the frequency of the inter-RAT neighbour cell).

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigInterRAT* for this event).

Thresh1 is the threshold parameter for this event (i.e. b2-*Threshold1* as defined within *reportConfigInterRAT* for this event).

Thresh2 is the threshold parameter for this event (i.e. *b2-Threshold2* as defined within *reportConfigInterRAT* for this event). For CDMA2000, *b2-Threshold2* is divided by -2.

Mp is expressed in dBm in case of RSRP, or in dB in case of RSRQ.

Mn is expressed in dBm or dB, depending on the measurement quantity of the inter-RAT neighbour cell.

Ofn, Hys are expressed in dB.

Thresh1 is expressed in the same unit as ***Mp***.

Thresh2 is expressed in the same unit as ***Mn***.

5.5.4.9 Event C1 (CSI-RS resource becomes better than threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition C1-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition C1-2, as specified below, is fulfilled;

Inequality C1-1 (Entering condition)

$Mcr + Ocr - Hys > Thresh$

Inequality C1-2 (Leaving condition)

$Mcr + Ocr + Hys < Thresh$

The variables in the formula are defined as follows:

Mcr is the measurement result of the CSI-RS resource, not taking into account any offsets.

Ocr is the CSI-RS specific offset (i.e. *csi-RS-IndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the CSI-RS resource), and set to zero if not configured for the CSI-RS resource.

DAINGEAN_0001938

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Thresh is the threshold parameter for this event (i.e. *c1-Threshold* as defined within *reportConfigEUTRA* for this event).

Mcr, Thresh are expressed in dBm.

Ocr, Hys are expressed in dB.

5.5.4.10 Event C2 (CSI-RS resource becomes offset better than reference CSI-RS resource)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition C2-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition C2-2, as specified below, is fulfilled;

NOTE: The CSI-RS resource(s) that triggers the event is on the same frequency as the reference CSI-RS resource, i.e. both are on the frequency indicated in the associated *measObject*.

Inequality C2-1 (Entering condition)

$$Mcr + Ocr - Hys > Mref + Oref + Off$$

Inequality C2-2 (Leaving condition)

$$Mcr + Ocr + Hys < Mref + Oref + Off$$

The variables in the formula are defined as follows:

Mcr is the measurement result of the CSI-RS resource, not taking into account any offsets.

Ocr is the CSI-RS specific offset of the CSI-RS resource (i.e. *csi-RS-IndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the CSI-RS resource), and set to zero if not configured for the CSI-RS resource.

Mref is the measurement result of the reference CSI-RS resource (i.e. *c2-RefCSI-RS* as defined within *reportConfigEUTRA* for this event), not taking into account any offsets.

Oref is the CSI-RS specific offset of the reference CSI-RS resource (i.e. *csi-RS-IndividualOffset* as defined within *measObjectEUTRA* corresponding to the frequency of the reference CSI-RS resource), and is set to zero if not configured for the reference CSI-RS resource.

Hys is the hysteresis parameter for this event (i.e. *hysteresis* as defined within *reportConfigEUTRA* for this event).

Off is the offset parameter for this event (i.e. *c2-Offset* as defined within *reportConfigEUTRA* for this event).

Mcr, Mref are expressed in dBm.

Ocr, Oref, Hys, Off are expressed in dB.

5.5.4.11 Event W1 (WLAN becomes better than a threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when *wlan-MobilitySet* within *VarWLAN-MobilityConfig* does not contain any entries and condition W1-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition W1-2, as specified below, is fulfilled;

Inequality W1-1 (Entering condition)

$$Mn - Hys > Thresh$$

Inequality W1-2 (Leaving condition)

DAINGEAN_0001939

$Mn + Hys < Thresh$

The variables in the formula are defined as follows:

Mn is the measurement result of WLAN(s) configured in the measurement object, not taking into account any offsets.

Hys is the hysteresis parameter for this event.

Thresh is the threshold parameter for this event (i.e. *w1-Threshold* as defined within *reportConfigInterRAT* for this event).

Mn is expressed in dBm.

Hys is expressed in dB.

Thresh is expressed in the same unit as ***Mn***.

5.5.4.12 Event W2 (All WLAN inside WLAN mobility set becomes worse than threshold1 and a WLAN outside WLAN mobility set becomes better than threshold2)

The UE shall:

1> consider the entering condition for this event to be satisfied when both conditions W2-1 and W2-2 as specified below are fulfilled;

1> consider the leaving condition for this event to be satisfied when condition W2-3 or condition W2-4 , i.e. at least one of the two, as specified below is fulfilled;

Inequality W2-1 (Entering condition 1)

$Ms + Hys < Thresh1$

Inequality W2-2 (Entering condition 2)

$Mn - Hys > Thresh2$

Inequality W2-3 (Leaving condition 1)

$Ms - Hys > Thresh1$

Inequality W2-4 (Leaving condition 2)

$Mn + Hys < Thresh2$

The variables in the formula are defined as follows:

Ms is the measurement result of WLAN(s) which matches all WLAN identifiers of at least one entry within *wlan-MobilitySet* in *VarWLAN-MobilityConfig*, not taking into account any offsets.

Mn is the measurement result of WLAN(s) configured in the measurement object which does not match all WLAN identifiers of any entry within *wlan-MobilitySet* in *VarWLAN-MobilityConfig*, not taking into account any offsets.

Hys is the hysteresis parameter for this event.

Thresh1 is the threshold parameter for this event (i.e. *w2-Threshold1* as defined within *reportConfigInterRAT* for this event).

Thresh2 is the threshold parameter for this event (i.e. *w2-Threshold2* as defined within *reportConfigInterRAT* for this event).

Mn, Ms are expressed in dBm.

Hys is expressed in dB.

DAINGEAN_0001940

Thresh1 is expressed in the same unit as ***Ms***.

Thresh2 is expressed in the same unit as ***Mn***.

5.5.4.13 Event W3 (All WLAN inside WLAN mobility set becomes worse than a threshold)

The UE shall:

1> consider the entering condition for this event to be satisfied when condition W3-1, as specified below, is fulfilled;

1> consider the leaving condition for this event to be satisfied when condition W3-2, as specified below, is fulfilled;

Inequality W3-1 (Entering condition)

$Ms + Hys < Thresh$

Inequality W3-2 (Leaving condition)

$Ms - Hys > Thresh$

The variables in the formula are defined as follows:

Ms is the measurement result of WLAN(s) which matches all WLAN identifiers of at least one entry within *wlan-MobilitySet* in *VarWLAN-MobilityConfig*, not taking into account any offsets.

Hys is the hysteresis parameter for this event.

Thresh is the threshold parameter for this event (i.e. *w3-Threshold* as defined within *reportConfigInterRAT* for this event).

Ms is expressed in dBm.

Hys is expressed in dB.

Thresh is expressed in the same unit as ***Ms***.

5.5.5 Measurement reporting

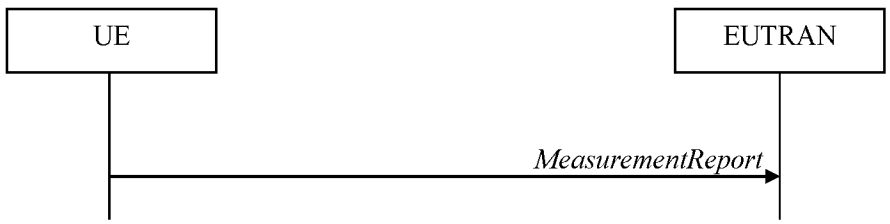


Figure 5.5.5-1: Measurement reporting

The purpose of this procedure is to transfer measurement results from the UE to E-UTRAN. The UE shall initiate this procedure only after successful security activation.

For the *measId* for which the measurement reporting procedure was triggered, the UE shall set the *measResults* within the *MeasurementReport* message as follows:

1> set the *measId* to the measurement identity that triggered the measurement reporting;

1> set the *measResultPCell* to include the quantities of the PCell;

1> set the *measResultServFreqList* to include for each SCell that is configured, if any, within *measResultSCell* the quantities of the concerned SCell, if available according to performance requirements in [16];

DAINGEAN_0001941

1> if the *reportConfig* associated with the *measId* that triggered the measurement reporting includes *reportAddNeighMeas*:

2> for each serving frequency for which *measObjectId* is referenced in the *measIdList*, other than the frequency corresponding with the *measId* that triggered the measurement reporting:

3> set the *measResultServFreqList* to include within *measResultBestNeighCell* the *physCellId* and the quantities of the best non-serving cell, based on RSRP, on the concerned serving frequency;

1> if there is at least one applicable neighbouring cell to report:

2> set the *measResultNeighCells* to include the best neighbouring cells up to *maxReportCells* in accordance with the following:

3> if the *triggerType* is set to *event*:

4> include the cells included in the *cellsTriggeredList* as defined within the *VarMeasReportList* for this *measId*;

3> else:

4> include the applicable cells for which the new measurement results became available since the last periodical reporting or since the measurement was initiated or reset;

NOTE 1: The reliability of the report (i.e. the certainty it contains the strongest cells on the concerned frequency) depends on the measurement configuration i.e. the *reportInterval*. The related performance requirements are specified in TS 36.133 [16].

3> for each cell that is included in the *measResultNeighCells*, include the *physCellId*;

3> if the *triggerType* is set to *event*; or the *purpose* is set to *reportStrongestCells* or to *reportStrongestCellsForSON*:

4> for each included cell, include the layer 3 filtered measured results in accordance with the *reportConfig* for this *measId*, ordered as follows:

5> if the *measObject* associated with this *measId* concerns E-UTRA:

6> set the *measResult* to include the quantity(ies) indicated in the *reportQuantity* within the concerned *reportConfig* in order of decreasing *triggerQuantity*, i.e. the best cell is included first;

5> if the *measObject* associated with this *measId* concerns UTRA FDD and if *ReportConfigInterRAT* includes the *reportQuantityUTRA-FDD*:

6> set the *measResult* to include the quantities indicated by the *reportQuantityUTRA-FDD* in order of decreasing *measQuantityUTRA-FDD* within the *quantityConfig*, i.e. the best cell is included first;

5> if the *measObject* associated with this *measId* concerns UTRA FDD and if *ReportConfigInterRAT* does not include the *reportQuantityUTRA-FDD*; or

5> if the *measObject* associated with this *measId* concerns UTRA TDD, GERAN or CDMA2000:

6> set the *measResult* to the quantity as configured for the concerned RAT within the *quantityConfig* in order of either decreasing quantity for UTRA and GERAN or increasing quantity for CDMA2000 *pilotStrength*, i.e. the best cell is included first;

3> else if the *purpose* is set to *reportCGI*:

4> if the mandatory present fields of the *cgi-Info* for the cell indicated by the *cellForWhichToReportCGI* in the associated *measObject* have been obtained:

5> if the *includeMultiBandInfo* is configured:

6> include the *freqBandIndicator*;

DAINGEAN_0001942

6> if the cell broadcasts the *multiBandInfoList*, include the *multiBandInfoList*;

6> if the cell broadcasts the *freqBandIndicatorPriority*, include the *freqBandIndicatorPriority*;

5> if the cell broadcasts a CSG identity:

6> include the *csg-Identity*;

6> include the *csg-MemberStatus* and set it to *member* if the cell is a CSG member cell;

5> if the *si-RequestForHO* is configured within the *reportConfig* associated with this *measId*:

6> include the *cgi-Info* containing all the fields that have been successfully acquired and in accordance with the following:

7> if the cell is a CSG member cell, determine the subset of the PLMN identities, starting from the second entry of PLMN identities in the broadcast information, that meet the following conditions:

a) equal to the RPLMN or an EPLMN; and

b) the CSG whitelist of the UE includes an entry comprising of the concerned PLMN identity and the CSG identity broadcast by the cell;

7> if the subset of PLMN identities determined according to the previous includes at least one PLMN identity, include the *plmn-IdentityList* and set it to include this subset of the PLMN identities;

7> if the cell is a CSG member cell, include the *primaryPLMN-Suitable* if the primary PLMN meets conditions a) and b) specified above;

5> else:

6> include the *cgi-Info* containing all the fields that have been successfully acquired and in accordance with the following:

7> include in the *plmn-IdentityList* the list of identities starting from the second entry of PLMN Identities in the broadcast information;

1> for the cells included according to the previous (i.e. covering the PCell, the SCells, the best non-serving cells on serving frequencies as well as neighbouring EUTRA cells) include results according to the extended RSRQ if corresponding results are available according to the associated performance requirements defined in 36.133 [16];

1> if there is at least one applicable CSI-RS resource to report:

2> set the *measResultCSI-RS-List* to include the best CSI-RS resources up to *maxReportCells* in accordance with the following:

3> if the *triggerType* is set to *event*:

4> include the CSI-RS resources included in the *csi-RS-TriggeredList* as defined within the *VarMeasReportList* for this *measId*;

3> else:

4> include the applicable CSI-RS resources for which the new measurement results became available since the last periodical reporting or since the measurement was initiated or reset;

NOTE 2: The reliability of the report (i.e. the certainty it contains the strongest CSI-RS resources on the concerned frequency) depends on the measurement configuration i.e. the *reportInterval*. The related performance requirements are specified in TS 36.133 [16].

3> for each CSI-RS resource that is included in the *measResultCSI-RS-List*:

4> include the *measCSI-RS-Id*;

DAINGEAN_0001943

4> include the layer 3 filtered measured results in accordance with the *reportConfig* for this *measId*, ordered as follow:

5> set the *csi-RSRP-Result* to include the quantity indicated in the *reportQuantity* within the concerned *reportConfig* in order of decreasing *triggerQuantityCSI-RS*, i.e. the best CSI-RS resource is included first;

4> if *reportCRS-Meas* is included within the associated *reportConfig*, and the cell indicated by *physCellId* of this CSI-RS resource is not a serving cell:

5> set the *measResultNeighCells* to include the cell indicated by *physCellId* of this CSI-RS resource, and include the *physCellId*;

5> set the *rsrpResult* to include the RSRP of the concerned cell, if available according to performance requirements in [16];

5> set the *rsrqResult* to include the RSRQ of the concerned cell, if available according to performance requirements in [16];

1> if the *ue-RxTxTimeDiffPeriodical* is configured within the corresponding *reportConfig* for this *measId*;

2> set the *ue-RxTxTimeDiffResult* to the measurement result provided by lower layers;

2> set the *currentSFN*;

1> if the *measRSSI-ReportConfig* is configured within the corresponding *reportConfig* for this *measId:*

2> set the *rssi-Result* to the average of sample value(s) provided by lower layers in the *reportInterval*;

2> set the *channelOccupancy* to the rounded percentage of sample values which are beyond to the *channelOccupancyThreshold* within all the sample values in the *reportInterval*;

1> if uplink PDCP delay results are available:

2> set the *ul-PDCP-DelayResultList* to include the uplink PDCP delay results available;

1> if the *includeLocationInfo* is configured in the corresponding *reportConfig* for this *measId* and detailed location information that has not been reported is available, set the content of the *locationInfo* as follows:

2> include the *locationCoordinates*;

2> if available, include the *gnss-TOD-msec*;

1> if the *reportSSTD-Meas* is set to *true* within the corresponding *reportConfig* for this *measId*:

2> set the *measResultSSTD* to the measurement results provided by lower layers;

1> increment the *numberOfReportsSent* as defined within the *VarMeasReportList* for this *measId* by 1;

1> stop the periodical reporting timer, if running;

1> if the *numberOfReportsSent* as defined within the *VarMeasReportList* for this *measId* is less than the *reportAmount* as defined within the corresponding *reportConfig* for this *measId*:

2> start the periodical reporting timer with the value of *reportInterval* as defined within the corresponding *reportConfig* for this *measId*;

1> else:

2> if the *triggerType* is set to *periodical*:

3> remove the entry within the *VarMeasReportList* for this *measId*;

3> remove this *measId* from the *measIdList* within *VarMeasConfig*;

1> if the measured results are for CDMA2000 HRPD:

2> set the *preRegistrationStatusHRPD* to the UE's CDMA2000 upper layer's HRPD *preRegistrationStatus*;

DAINGEAN_0001944

1> if the measured results are for CDMA2000 1xRTT:

2> set the *preRegistrationStatusHRPD* to *FALSE*;

1> if the measured results are for WLAN:

2> set the *measResult* to include the quantities within the *quantityConfigWLAN* for the following WLAN(s) up to *maxReportCells:*

3> include WLAN the UE is connected to, if any;

3> include WLAN in order of decreasing WLAN RSSI, i.e. the best WLAN is included first, for WLANs which do not match all WLAN identifiers of any entry within *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

2> for each included WLAN:

3> set *wlan-Identifiers* to include all WLAN identifiers that can be acquired for the WLAN measured;

3> set *connectedWLAN* to *TRUE* if the UE is connected to the WLAN measured;

3> if *reportQuantityWLAN* exists within the *VarMeasConfig* for this *measId;* for its fields:

4> if *bandRequestWLAN* is set to *TRUE*:

5> set *bandWLAN* to include WLAN band of the WLAN measured;

4> if *carrierInfoRequestWLAN* is set to *TRUE*:

5> set *carrierInfoWLAN* to include WLAN carrier information of the WLAN measured if it can be acquired;

4> if *availableAdmissionCapacityRequestWLAN* is set to *TRUE*:

5> set the *measResult* to include *avaiableAdmissionCapacityWLAN* if it can be acquired;

4> if *backhaulDL-BandwidthRequestWLAN* is set to *TRUE*:

5> set the *measResult* to include *backhaulDL-BandwidthWLAN* if it can be acquired;

4> if *backhaulUL-BandwidthRequestWLAN* is set to *TRUE*:

5> set the *measResult* to include *backhaulUL-BandwidthWLAN* if it can be acquired;

4> if *channelUtilizationRequestWLAN* is set to *TRUE*:

5> set the *measResult* to include *channelUtilizationWLAN* if it can be acquired;

4> if *stationCountRequestWLAN* is set to *TRUE*:

5> set the *measResult* to include *stationCountWLAN* if it can be acquired;

1> submit the *MeasurementReport* message to lower layers for transmission, upon which the procedure ends;

5.5.6 Measurement related actions

5.5.6.1 Actions upon handover and re-establishment

E-UTRAN applies the handover procedure as follows:

- when performing the handover procedure, as specified in 5.3.5.4, ensure that a *measObjectId* corresponding to each handover target serving frequency is configured as a result of the procedures described in this sub-clause and in 5.3.5.4;

DAINGEAN_0001945

- when changing the band while the physical frequency remains unchanged, E-UTRAN releases the *measObject* corresponding to the source frequency and adds a *measObject* corresponding to the target frequency (i.e. it does not reconfigure the *measObject*);

E-UTRAN applies the re-establishment procedure as follows:

- when performing the connection re-establishment procedure, as specified in 5.3.7, ensure that a *measObjectId* corresponding each target serving frequency is configured as a result of the procedure described in this sub-clause and the subsequent connection reconfiguration procedure immediately following the re-establishment procedure;
- in the first reconfiguration following the re-establishment when changing the band while the physical frequency remains unchanged, E-UTRAN releases the *measObject* corresponding to the source frequency and adds a *measObject* corresponding to the target frequency (i.e. it does not reconfigure the *measObject*);

The UE shall:

1> for each *measId* included in the *measIdList* within *VarMeasConfig*:

2> if the *triggerType* is set to *periodical*:

3> remove this *measId* from the *measIdList* within *VarMeasConfig*:

1> if the procedure was triggered due to a handover or successful re-establishment and the procedure involves a change of primary frequency, update the *measId* values in the *measIdList* within *VarMeasConfig* as follows:

2> if a *measObjectId* value corresponding to the target primary frequency exists in the *measObjectList* within *VarMeasConfig*:

3> for each *measId* value in the *measIdList*:

4> if the *measId* value is linked to the *measObjectId* value corresponding to the source primary frequency:

5> link this *measId* value to the *measObjectId* value corresponding to the target primary frequency;

4> else if the *measId* value is linked to the *measObjectId* value corresponding to the target primary frequency:

5> link this *measId* value to the *measObjectId* value corresponding to the source primary frequency;

2> else:

3> remove all *measId* values that are linked to the *measObjectId* value corresponding to the source primary frequency;

1> remove all measurement reporting entries within *VarMeasReportList*;

1> stop the periodical reporting timer or timer T321, whichever one is running, as well as associated information (e.g. *timeToTrigger*) for all *measId*;

1> release the measurement gaps, if activated;

NOTE: If the UE requires measurement gaps to perform inter-frequency or inter-RAT measurements, the UE resumes the inter-frequency and inter-RAT measurements after the E-UTRAN has setup the measurement gaps.

5.5.6.2 Speed dependant scaling of measurement related parameters

The UE shall adjust the value of the following parameter configured by the E-UTRAN depending on the UE speed: *timeToTrigger*. The UE shall apply 3 different levels, which are selected as follows:

The UE shall:

1> perform mobility state detection using the mobility state detection as specified in TS 36.304 [4] with the following modifications:

DAINGEAN_0001946

2> counting handovers instead of cell reselections;

2> applying the parameter applicable for RRC_CONNECTED as included in *speedStatePars* within *VarMeasConfig*;

1> if high mobility state is detected:

2> use the *timeToTrigger* value multiplied by *sf-High* within *VarMeasConfig*;

1> else if medium mobility state is detected:

2> use the *timeToTrigger* value multiplied by *sf-Medium* within *VarMeasConfig*;

1> else:

2> no scaling is applied;

5.5.7 Inter-frequency RSTD measurement indication

5.5.7.1 General

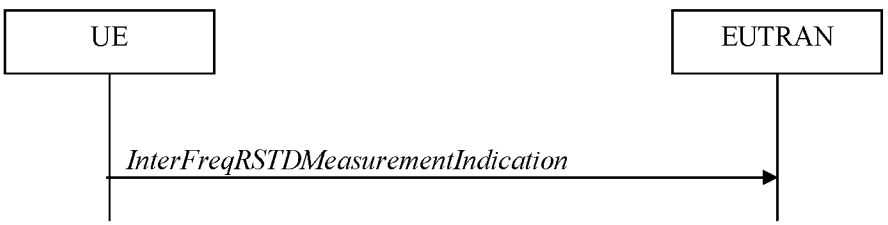


Figure 5.5.7.1-1: Inter-frequency RSTD measurement indication

The purpose of this procedure is to indicate to the network that the UE is going to start/stop OTDOA inter-frequency RSTD measurements which require measurement gaps as specified in [16, 8.1.2.6].

NOTE: It is a network decision to configure the measurement gap.

5.5.7.2 Initiation

The UE shall:

1> if and only if upper layers indicate to start performing inter-frequency RSTD measurements and the UE requires measurement gaps for these measurements while measurement gaps are either not configured or not sufficient:

2> initiate the procedure to indicate start;

NOTE 1: The UE verifies the measurement gap situation only upon receiving the indication from upper layers. If at this point in time sufficient gaps are available, the UE does not initiate the procedure. Unless it receives a new indication from upper layers, the UE is only allowed to further repeat the procedure in the same PCell once per frequency if the provided measurement gaps are insufficient.

1> if and only if upper layers indicate to stop performing inter-frequency RSTD measurements:

2> initiate the procedure to indicate stop;

NOTE 2: The UE may initiate the procedure to indicate stop even if it did not previously initiate the procedure to indicate start.

5.5.7.3 Actions related to transmission of *InterFreqRSTDMeasurementIndication* message

The UE shall set the contents of *InterFreqRSTDMeasurementIndication* message as follows:

DAINGEAN_0001947

1> set the *rstd-InterFreqIndication* as follows:

2> if the procedure is initiated to indicate start of inter-frequency RSTD measurements:

3> set the *rstd-InterFreqInfoList* according to the information received from upper layers;

2> else if the procedure is initiated to indicate stop of inter-frequency RSTD measurements:

3> set the *rstd-InterFreqIndication* to the value *stop*;

1> submit the *InterFreqRSTDMeasurementIndication* message to lower layers for transmission, upon which the procedure ends;

5.6 Other

5.6.0 General

For NB-IoT, only a subset of the procedures described in this sub-clause apply.

Table 5.6.0-1 specifies the procedures that are applicable to NB-IoT. All other procedures are not applicable to NB-IoT; this is not further stated in the corresponding procedures.

Table 5.6.0-1: "Other" Procedures applicable to a NB-IoT UE

Sub-clause	Procedures
5.6.1	DL information transfer
5.6.2	UL information transfer
5.6.3	UE Capability transfer

5.6.1 DL information transfer

5.6.1.1 General

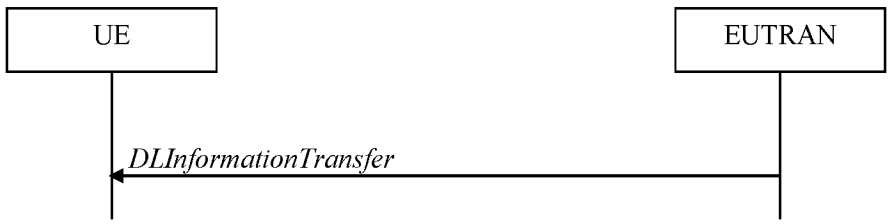


Figure 5.6.1.1-1: DL information transfer

The purpose of this procedure is to transfer NAS or (tunnelled) non-3GPP dedicated information from E-UTRAN to a UE in RRC_CONNECTED.

5.6.1.2 Initiation

E-UTRAN initiates the DL information transfer procedure whenever there is a need to transfer NAS or non-3GPP dedicated information. E-UTRAN initiates the DL information transfer procedure by sending the *DLInformationTransfer* message.

5.6.1.3 Reception of the *DLInformationTransfer* by the UE

Upon receiving *DLInformationTransfer* message, the UE shall:

1> if the UE is a NB-IoT UE; or

1> if the *dedicatedInfoType* is set to *dedicatedInfoNAS*:

DAINGEAN_0001948

2> forward the *dedicatedInfoNAS* to the NAS upper layers.

1> if the *dedicatedInfoType* is set to *dedicatedInfoCDMA2000-1XRTT* or to *dedicatedInfoCDMA2000-HRPD*:

2> forward the *dedicatedInfoCDMA2000* to the CDMA2000 upper layers;

5.6.2 UL information transfer

5.6.2.1 General

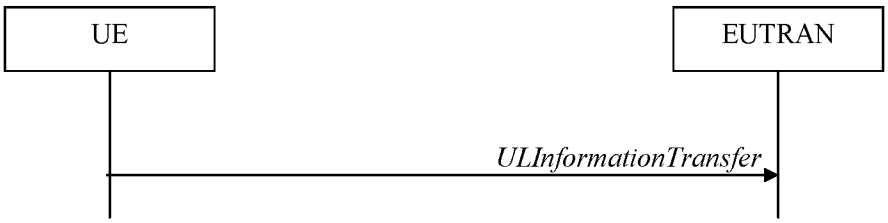


Figure 5.6.2.1-1: UL information transfer

The purpose of this procedure is to transfer NAS or (tunnelled) non-3GPP dedicated information from the UE to E-UTRAN.

5.6.2.2 Initiation

A UE in RRC_CONNECTED initiates the UL information transfer procedure whenever there is a need to transfer NAS or non-3GPP dedicated information, except at RRC connection establishment or resume in which case the NAS information is piggybacked to the *RRCConnectionSetupComplete* or *RRCConnectionResumeComplete* message correspondingly. The UE initiates the UL information transfer procedure by sending the *ULInformationTransfer* message. When CDMA2000 information has to be transferred, the UE shall initiate the procedure only if SRB2 is established.

5.6.2.3 Actions related to transmission of *ULInformationTransfer* message

The UE shall set the contents of the *ULInformationTransfer* message as follows:

1> if there is a need to transfer NAS information:

2> if the UE is a NB-IoT UE:

3> set the *dedicatedInfoNAS* to include the information received from upper layers;

2> else, set the *dedicatedInfoType* to include the *dedicatedInfoNAS*;

1> if there is a need to transfer CDMA2000 1XRTT information:

2> set the *dedicatedInfoType* to include the *dedicatedInfoCDMA2000-1XRTT*;

1> if there is a need to transfer CDMA2000 HRPD information:

2> set the *dedicatedInfoType* to include the *dedicatedInfoCDMA2000-HRPD*;

1> submit the *ULInformationTransfer* message to lower layers for transmission, upon which the procedure ends;

5.6.2.4 Failure to deliver *ULInformationTransfer* message

The UE shall:

1> if the UE is a NB-IoT UE, AS security is not started and radio link failure occurs before the successful delivery of *ULInformationTransfer* messages has been confirmed by lower layers; or

DAINGEAN_0001949

1> if mobility (i.e. handover, RRC connection re-establishment) occurs before the successful delivery of *ULInformationTransfer* messages has been confirmed by lower layers:

2> inform upper layers about the possible failure to deliver the information contained in the concerned *ULInformationTransfer* messages;

5.6.3 UE capability transfer

5.6.3.1 General

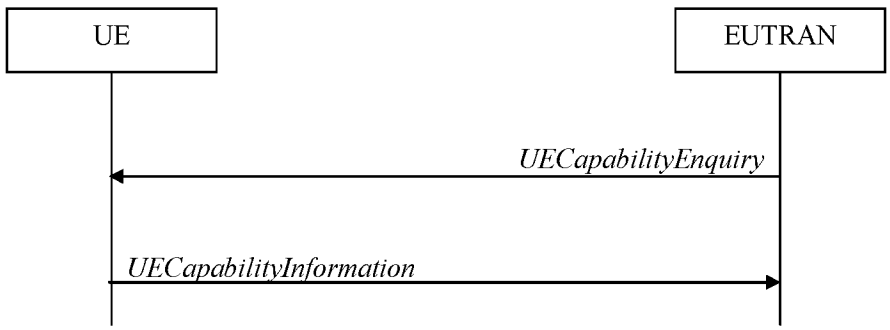


Figure 5.6.3.1-1: UE capability transfer

The purpose of this procedure is to transfer UE radio access capability information from the UE to E-UTRAN.

If the UE has changed its E-UTRAN radio access capabilities, the UE shall request higher layers to initiate the necessary NAS procedures (see TS 23.401 [41]) that would result in the update of UE radio access capabilities using a new RRC connection.

NOTE: Change of the UE's GERAN UE radio capabilities in RRC_IDLE is supported by use of Tracking Area Update.

5.6.3.2 Initiation

E-UTRAN initiates the procedure to a UE in RRC_CONNECTED when it needs (additional) UE radio access capability information.

5.6.3.3 Reception of the *UECapabilityEnquiry* by the UE

The UE shall:

1> for NB-IoT, set the contents of *UECapabilityInformation* message as follows:

2> include the UE Radio Access Capability Parameters within the *ue-Capability-Container*;

2> include *ue-RadioPagingInfo*;

2> submit the *UECapabilityInformation* message to lower layers for transmission, upon which the procedure ends;

1> else, set the contents of *UECapabilityInformation* message as follows:

2> if the *ue-CapabilityRequest* includes *eutra*:

3> include the *UE-EUTRA-Capability* within a *ue-CapabilityRAT-Container* and with the *rat-Type* set to *eutra*;

3> if the UE supports FDD and TDD:

4> set all fields of *UECapabilityInformation*, except field *fdd-Add-UE-EUTRA-Capabilities* and *tdd-Add-UE-EUTRA-Capabilities* (including their sub-fields), to include the values applicable for both FDD and TDD (i.e. functionality supported by both modes);

DAINGEAN_0001950

4> if (some of) the UE capability fields have a different value for FDD and TDD:

5> if for FDD, the UE supports additional functionality compared to what is indicated by the previous fields of *UECapabilityInformation*:

6> include field *fdd-Add-UE-EUTRA-Capabilities* and set it to include fields reflecting the additional functionality applicable for FDD;

5> if for TDD, the UE supports additional functionality compared to what is indicated by the previous fields of *UECapabilityInformation*:

6> include field *tdd-Add-UE-EUTRA-Capabilities* and set it to include fields reflecting the additional functionality applicable for TDD;

NOTE 1: The UE includes fields of *XDD-Add-UE-EUTRA-Capabilities* in accordance with the following:

- The field is included only if one or more of its sub-fields (or bits in the feature group indicators string) has a value that is different compared to the value signalled elsewhere within *UE-EUTRA-Capability*;
  (this value signalled elsewhere is also referred to as the *Common value*, that is supported for both XDD modes)
- For the fields that are included in *XDD-Add-UE-EUTRA-Capabilities*, the UE sets:
  - the sub-fields (or bits in the feature group indicators string) that are not allowed to be different to the same value as the *Common value*;
  - the sub-fields (or bits in the feature group indicators string) that are allowed to be different to a value indicating at least the same functionality as indicated by the *Common value*;

3> else (UE supports single xDD mode):

4> set all fields of *UECapabilityInformation*, except field *fdd-Add-UE-EUTRA-Capabilities* and *tdd-Add-UE-EUTRA-Capabilities* (including their sub-fields), to include the values applicable for the xDD mode supported by the UE;

3> if the *UECapabilityEnquiry* message includes *requestedFrequencyBands* and UE supports *requestedFrequencyBands:*

4> determine the priority order of band combinations supported by the UE according to the following priority order (i.e. listed in order of decreasing priority):

5> include all non-CA bands, regardless of whether UE supports carrier aggregation, only:

- if the UE includes *ue-Category-v1020* (i.e. indicating category 6 to 8); or
- if for at least one of the non-CA bands, the UE supports more MIMO layers with TM9 and TM10 than implied by the UE category; or
- if the UE supports TM10 with one or more CSI processes;

5> include all 2DL+1UL CA band combinations, only consisting of bands included in *requestedFrequencyBands* (except where conflicting with rules defined below for fallback band combinations);

5> include all other CA band combinations (except where conflicting with rules defined below), only consisting of bands included in *requestedFrequencyBands*, and prioritized in the order of *requestedFrequencyBands*, (i.e. first include remaining band combinations containing the first-listed band, then include remaining band combinations containing the second-listed band, and so on);

5> if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsDL* and the *requestedMaxCCsUL* (i.e. both UL and DL maximums are given):

6> include the target band combinations for which the number of CCs in DL is up to the value indicated in the *requestedMaxCCsDL* and for which the number of CCs in UL is up to the value indicated in the *requestedMaxCCsUL*;

6> indicate in *requestedCCsUL* the same value as received in *requestedMaxCCsUL*;

DAINGEAN_0001951

6> indicate in *requestedCCsDL* the same value as received in *requestedMaxCCsDL*;

5> else if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsDL* (i.e. only DL maximum limit is given):

6> include the target band combinations for which the number of CCs in DL is up to the value indicated in the *requestedMaxCCsDL*;

6> indicate value in *requestedCCsDL* the same value as received in *requestedMaxCCsDL*;

5> else if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsUL* (i.e. only UL maximum limit is given):

6> include the target band combinations for which the number of CCs in UL is up to the value indicated in the *requestedMaxCCsUL*;

6> indicate in *requestedCCsUL* the same value as received in *requestedMaxCCsUL;*

5> if the UE supports *reducedIntNonContComb* and the *UECapabilityEnquiry* message includes *requestReducedIntrNonContComb*:

6> indicate value *true* in *reducedIntNonContComb*;

6> if an intra-band non-contiguous CA combination can be declared as supported by the other intra-band non-contiguous CA combination already included as specified in TS 36.306 [5, 4.3.5.21]:

7> exclude this band combination from the supported band combination list;

5> if the UE supports *requestReducedFormat* and UE supports *skipFallbackCombinations* and *UECapabilityEnquiry* message includes *requestSkipFallbackComb*:

6> set *skipFallbackCombRequested* to *true*;

6> include CA band combinations with the highest supported number of DL and UL carriers first;

6> if a band combination (including 2DL+1UL CA band combinations) is the fallback band combination as specified in TS 36.306 [5] of an already-included band combination:

7> exclude this band combination from the supported band combination list;

7> if the capabilities of this band combination are different from the already-included band combination whose fallback case this band combination is, include the *differentFallbackSupported* in the already-included band combination whose fallback case this band combination is;

4> if the *UECapabilityEnquiry* message includes *requestReducedFormat* and UE supports *requestReducedFormat*:

5> include in *supportedBandCombinationReduced* as many as possible of the band combinations supported by the UE, including the non-CA combinations, determined according to the rules and priority order defined above;

4> else

5> include in *supportedBandCombination* as many of the target band combinations as possible up to 5DL+5UL CA band combinations, including the non-CA combinations, determined according to the rules and priority order defined above;

5> include in *supportedBandCombinationAdd* as many of the remaining target band combinations as possible up to 5DL+5UL CA band combinations, i.e. the target band combinations the UE was not able to include in *supportedBandCombination*, and limited to those consisting of bands included in *requestedFrequencyBands*, determined according to the rules and priority order defined above;

4> indicate in *requestedBands* the same bands and in the same order as included in the received *requestedFrequencyBands*;

DAINGEAN_0001952

3> else

4> determine the priority order of band combinations supported by the UE according to the following priority order (i.e. listed in order of decreasing priority):

5> include all non-CA bands, regardless of whether UE supports carrier aggregation, only:

- if the UE includes *ue-Category-v1020* (i.e. indicating category 6 to 8); or
- if for at least one of the non-CA bands, the UE supports more MIMO layers with TM9 and TM10 than implied by the UE category; or
- if the UE supports TM10 with one or more CSI processes;

5> include all 2DL+1UL CA band combinations (except where conflicting with rules defined below for fallback band combinations);

5> include all other CA band combinations (except where conflicting with rules defined below);

5> if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsDL* and the *requestedMaxCCsUL* (i.e. both UL and DL maximums are given):

6> include the target band combinations for which the number of CCs in DL is up to the value indicated in the *requestedMaxCCsDL* and for which the number of CCs in UL is up to the value indicated in the *requestedMaxCCsUL*;

6> indicate in *requestedCCsUL* the same value as received in *requestedMaxCCsUL*;

6> indicate in *requestedCCsDL* the same value as received in *requestedMaxCCsDL*;

5> else if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsDL* (i.e. only DL maximum limit is given):

6> include the target band combinations for which the number of CCs in DL is up to the value indicated in the *requestedMaxCCsDL*;

6> indicate in *requestedCCsDL* the same value as received in *requestedMaxCCsDL*;

5> else if UE supports *maximumCCsRetrieval* and if the *UECapabilityEnquiry* message includes the *requestedMaxCCsUL* (i.e. only UL maximum limit is given):

6> include the target band combinations for which the number of CCs in UL is up to the value indicated in the *requestedMaxCCsUL*;

6> indicate in *requestedCCsUL* the same value as received in *requestedMaxCCsUL*;

5> if the UE supports *reducedIntNonContComb* and the *UECapabilityEnquiry* message includes *requestReducedIntrNonContComb*:

6> indicate value *true* in *reducedIntNonContComb*;

6> if an intra-band non-contiguous CA combination can be declared as supported by the other intra-band non-contiguous CA combination already included as specified in TS 36.306 [5, 4.3.5.21]:

7> exclude this band combination from the supported band combination list;

5> if the UE supports *requestReducedFormat* and UE supports *skipFallbackCombinations* and *UECapabilityEnquiry* message includes *requestSkipFallbackComb*:

6> set *skipFallbackCombRequested* to *true*;

6> include CA band combinations with the highest supported number of DL and UL carriers first;

6> if a band combination (including 2DL+1UL CA band combinations) is the fallback band combination as specified in TS 36.306 [5] of an already-included band combination:

DAINGEAN_0001953

7> exclude this band combination from the supported band combination list;

7> if the capabilities of this band combination are different from the already-included band combination for which this band combination is a fallback, include the *differentFallbackSupported* in this already-included band combination;

4> if the *UECapabilityEnquiry* message includes *requestReducedFormat* and UE supports *requestReducedFormat*:

5> include in *supportedBandCombinationReduced* as many as possible of the band combinations supported by the UE, including the non-CA combinations, determined according to the rules and priority order defined above;

4> else

5> include in *supportedBandCombination* as many of the target band combinations as possible up to 5DL+5UL CA band combinations, including the non-CA combinations, determined according to the rules and priority order defined above;

5> if the number of non-CA and CA band combinations supported by UE exceeds the maximum number of band combinations of *supportedBandCombination*, the selection of subset of band combinations is up to UE implementation;

NOTE 2: If the *UECapabilityEnquiry* message does not include *requestedFrequencyBands*, UE does not include *supportedBandCombinationAdd*.

3> if the UE is a category 0 or M1 UE, or supports any UE capability information in *ue-RadioPagingInfo,* according to TS 36.306 [5]:

4> include *ue-RadioPagingInfo* and set the fields according to TS 36.306 [5];

2> if the *ue-CapabilityRequest* includes *geran-cs* and if the UE supports GERAN CS domain:

3> include the UE radio access capabilities for GERAN CS within a *ue-CapabilityRAT-Container* and with the *rat-Type* set to *geran-cs*;

2> if the *ue-CapabilityRequest* includes *geran-ps* and if the UE supports GERAN PS domain:

3> include the UE radio access capabilities for GERAN PS within a *ue-CapabilityRAT-Container* and with the *rat-Type* set to *geran-ps*;

2> if the *ue-CapabilityRequest* includes *utra* and if the UE supports UTRA:

3> include the UE radio access capabilities for UTRA within a *ue-CapabilityRAT-Container* and with the *rat-Type* set to *utra*;

2> if the *ue-CapabilityRequest* includes *cdma2000-1XRTT* and if the UE supports CDMA2000 1xRTT:

3> include the UE radio access capabilities for CDMA2000 within a *ue-CapabilityRAT-Container* and with the *rat-Type* set to *cdma2000-1XRTT*;

1> submit the *UECapabilityInformation* message to lower layers for transmission, upon which the procedure ends;

DAINGEAN_0001954

5.6.4 CSFB to 1x Parameter transfer

5.6.4.1 General

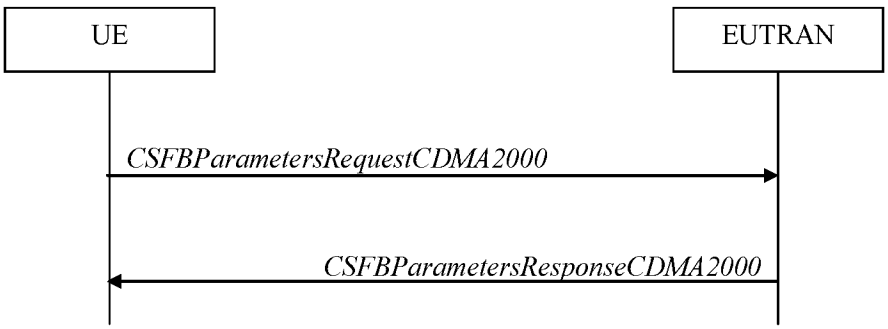


Figure 5.6.4.1-1: CSFB to 1x Parameter transfer

The purpose of this procedure is to transfer the CDMA2000 1xRTT parameters required to register the UE in the CDMA2000 1xRTT network for CSFB support.

5.6.4.2 Initiation

A UE in RRC_CONNECTED initiates the CSFB to 1x parameter transfer procedure upon request from the CDMA2000 upper layers. The UE initiates the CSFB to 1x parameter transfer procedure by sending the *CSFBParametersRequestCDMA2000* message.

5.6.4.3 Actions related to transmission of *CSFBParametersRequestCDMA2000* message

The UE shall:

1> submit the *CSFBParametersRequestCDMA2000* message to lower layers for transmission using the current configuration;

5.6.4.4 Reception of the *CSFBParametersResponseCDMA2000* message

Upon reception of the *CSFBParametersResponseCDMA2000* message, the UE shall:

1> forward the *rand* and the *mobilityParameters* to the CDMA2000 1xRTT upper layers;

5.6.5 UE Information

5.6.5.1 General

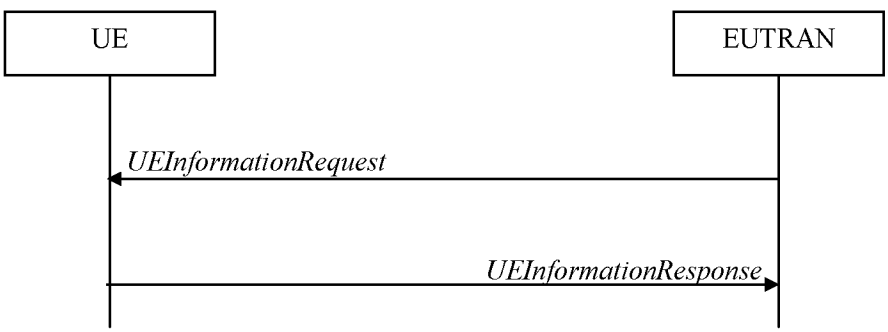


Figure 5.6.5.1-1: UE information procedure

The UE information procedure is used by E-UTRAN to request the UE to report information.

DAINGEAN_0001955

5.6.5.2 Initiation

E-UTRAN initiates the procedure by sending the *UEInformationRequest* message. E-UTRAN should initiate this procedure only after successful security activation.

5.6.5.3 Reception of the *UEInformationRequest* message

Upon receiving the *UEInformationRequest* message, the UE shall, only after successful security activation:

1> if *rach-ReportReq* is set to *true*, set the contents of the *rach-Report* in the *UEInformationResponse* message as follows:

2> set the *numberOfPreamblesSent* to indicate the number of preambles sent by MAC for the last successfully completed random access procedure;

2> if contention resolution was not successful as specified in TS 36.321 [6] for at least one of the transmitted preambles for the last successfully completed random access procedure:

3> set the *contentionDetected* to *true*;

2> else:

3> set the *contentionDetected* to *false*;

1> if *rlf-ReportReq* is set to *true* and the UE has radio link failure information or handover failure information available in *VarRLF-Report* and if the RPLMN is included in *plmn-IdentityList* stored in *VarRLF-Report*:

2> set *timeSinceFailure* in *VarRLF-Report* to the time that elapsed since the last radio link or handover failure in E-UTRA;

2> set the *rlf-Report* in the *UEInformationResponse* message to the value of *rlf-Report* in *VarRLF-Report*;

2> discard the *rlf-Report* from *VarRLF-Report* upon successful delivery of the *UEInformationResponse* message confirmed by lower layers;

1> if *connEstFailReportReq* is set to *true* and the UE has connection establishment failure information in *VarConnEstFailReport* and if the RPLMN is equal to *plmn-Identity* stored in *VarConnEstFailReport*:

2> set *timeSinceFailure* in *VarConnEstFailReport* to the time that elapsed since the last connection establishment failure in E-UTRA;

2> set the *connEstFailReport* in the *UEInformationResponse* message to the value of *connEstFailReport* in *VarConnEstFailReport*;

2> discard the *connEstFailReport* from *VarConnEstFailReport* upon successful delivery of the *UEInformationResponse* message confirmed by lower layers;

1> if the *logMeasReportReq* is present and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*:

2> if *VarLogMeasReport* includes one or more logged measurement entries, set the contents of the *logMeasReport* in the *UEInformationResponse* message as follows:

3> include the *absoluteTimeStamp* and set it to the value of *absoluteTimeInfo* in the *VarLogMeasReport*;

3> include the *traceReference* and set it to the value of *traceReference* in the *VarLogMeasReport*;

3> include the *traceRecordingSessionRef* and set it to the value of *traceRecordingSessionRef* in the *VarLogMeasReport;*

3> include the *tce-Id* and set it to the value of *tce-Id* in the *VarLogMeasReport*;

3> include the *logMeasInfoList* and set it to include one or more entries from *VarLogMeasReport* starting from the entries logged first;

3> if the *VarLogMeasReport* includes one or more additional logged measurement entries that are not included in the *logMeasInfoList* within the *UEInformationResponse* message:

DAINGEAN_0001956

4> include the *logMeasAvailable*;

1> if *mobilityHistoryReportReq* is set to *true*:

2> include the *mobilityHistoryReport* and set it to include entries from *VarMobilityHistoryReport*;

2> include in the *mobilityHistoryReport* an entry for the current cell, possibly after removing the oldest entry if required, and set its fields as follows:

3> set *visitedCellId* to the global cell identity of the current cell:

3> set field *timeSpent* to the time spent in the current cell;

1> if the *logMeasReport* is included in the *UEInformationResponse*:

2> submit the *UEInformationResponse* message to lower layers for transmission via SRB2;

2> discard the logged measurement entries included in the *logMeasInfoList* from *VarLogMeasReport* upon successful delivery of the *UEInformationResponse* message confirmed by lower layers;

1> else:

2> submit the *UEInformationResponse* message to lower layers for transmission via SRB1;

5.6.6 Logged Measurement Configuration

5.6.6.1 General

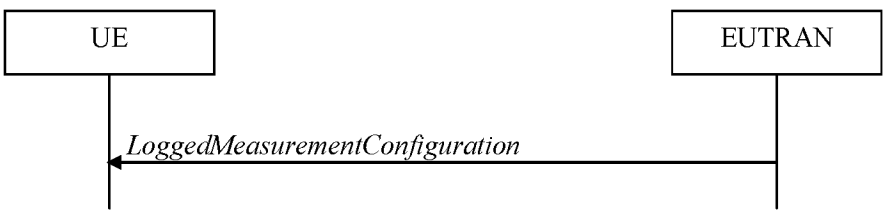


Figure 5.6.6.1-1: Logged measurement configuration

The purpose of this procedure is to configure the UE to perform logging of measurement results while in RRC_IDLE and to perform logging of measurement results for MBSFN in both RRC_IDLE and RRC_CONNECTED. The procedure applies to logged measurements capable UEs that are in RRC_CONNECTED.

NOTE E-UTRAN may retrieve stored logged measurement information by means of the UE information procedure.

5.6.6.2 Initiation

E-UTRAN initiates the logged measurement configuration procedure to UE in RRC_CONNECTED by sending the *LoggedMeasurementConfiguration* message.

5.6.6.3 Reception of the *LoggedMeasurementConfiguration* by the UE

Upon receiving the *LoggedMeasurementConfiguration* message the UE shall:

1> discard the logged measurement configuration as well as the logged measurement information as specified in 5.6.7;

DAINGEAN_0001957

1> store the received *loggingDuration*, *loggingInterval* and *areaConfiguration*, if included, in *VarLogMeasConfig*;

1> if the *LoggedMeasurementConfiguration* message includes *plmn-IdentityList*:

2> set *plmn-IdentityList* in *VarLogMeasReport* to include the RPLMN as well as the PLMNs included in *plmn-IdentityList*;

1> else:

2> set *plmn-IdentityList* in *VarLogMeasReport* to include the RPLMN;

1> store the received *absoluteTimeInfo*, *traceReference*, *traceRecordingSessionRef* and *tce-Id* in *VarLogMeasReport*;

1> store the received *targetMBSFN-AreaList*, if included, in *VarLogMeasConfig*;

1> start timer T330 with the timer value set to the *loggingDuration*;

5.6.6.4 T330 expiry

Upon expiry of T330 the UE shall:

1> release *VarLogMeasConfig*;

The UE is allowed to discard stored logged measurements, i.e. to release *VarLogMeasReport*, 48 hours after T330 expiry.

5.6.7 Release of Logged Measurement Configuration

5.6.7.1 General

The purpose of this procedure is to release the logged measurement configuration as well as the logged measurement information.

5.6.7.2 Initiation

The UE shall initiate the procedure upon receiving a logged measurement configuration in another RAT. The UE shall also initiate the procedure upon power off or detach.

The UE shall:

1> stop timer T330, if running;

1> if stored, discard the logged measurement configuration as well as the logged measurement information, i.e. release the UE variables *VarLogMeasConfig* and *VarLogMeasReport*;

5.6.8 Measurements logging

5.6.8.1 General

This procedure specifies the logging of available measurements by a UE in RRC_IDLE that has a logged measurement configuration and the logging of available measurements by a UE in both RRC_IDLE and RRC_CONNECTED if *targetMBSFN-AreaList* is included in *VarLogMeasConfig*.

5.6.8.2 Initiation

While T330 is running, the UE shall:

1> if measurement logging is suspended:

2> if during the last logging interval the IDC problems detected by the UE is resolved, resume measurement logging;

DAINGEAN_0001958

1> if not suspended, perform the logging in accordance with the following:

2> if *targetMBSFN-AreaList* is included in *VarLogMeasConfig*:

3> if the UE is camping normally on an E-UTRA cell or is connected to E-UTRA; and

3> if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport*; and

3> if the PCell (in RRC_CONNECTED) or cell where the UE is camping (in RRC_IDLE) is part of the area indicated by *areaConfiguration* if configured in *VarLogMeasConfig*:

4> for MBSFN areas, indicated in *targetMBSFN-AreaList,* from which the UE is receiving MBMS service:

5> perform MBSFN measurements in accordance with the performance requirements as specified in TS 36.133 [16];

NOTE 1: When configured to perform MBSFN measurement logging by *targetMBSFN-AreaList*, the UE is not required to receive additional MBSFN subframes, i.e. logging is based on the subframes corresponding to the MBMS services the UE is receiving.

5> perform logging at regular time intervals as defined by the *loggingInterval* in *VarLogMeasConfig,* but only for those intervals for which MBSFN measurement results are available as specified in TS 36.133 [16];

2> *else* if the UE is camping normally on an E-UTRA cell and if the RPLMN is included in *plmn-IdentityList* stored in *VarLogMeasReport* and, if the cell is part of the area indicated by *areaConfiguration* if configured in *VarLogMeasConfig*:

3> perform the logging at regular time intervals, as defined by the *loggingInterval* in *VarLogMeasConfig*;

2> when adding a logged measurement entry in *VarLogMeasReport*, include the fields in accordance with the following3> if the UE detected IDC problems during the last logging interval;

4> if *measResultServCell* in *VarLogMeasReport* is not empty;

5> include *InDeviceCoexDetected*;

5> suspend measurement logging from the next logging interval;

4> else;

5> suspend measurement logging;

NOTE 1A: The UE may detect the start of IDC problems as early as Phase 1 as described in 23.4 of TS 36.300 [9].

3> set the *relativeTimeStamp* to indicate the elapsed time since the moment at which the logged measurement configuration was received;

3> if detailed location information became available during the last logging interval, set the content of the *locationInfo* as follows:

4> include the *locationCoordinates*;

3> if *targetMBSFN-AreaList* is included in *VarLogMeasConfig*:

4> for each MBSFN area, for which the mandatory measurements result fields became available during the last logging interval:

5> set the *rsrpResultMBSFN*, *rsrqResultMBSFN* to include measurement results that became available during the last logging interval;

5> include the fields *signallingBLER-Result* or *dataBLER-MCH-ResultList* if the concerned BLER results are availble,

DAINGEAN_0001959

5> set the *mbsfn-AreaId* and *carrierFrequency* to indicate the MBSFN area in which the UE is receiving MBSFN transmission;

4> if in RRC_CONNECTED:

5> set the *servCellIdentity* to indicate global cell identity of the PCell;

5> set the *measResultServCell* to include the layer 3 filtered measured results of the PCell;

5> if available, set the *measResultNeighCells* to include the layer 3 filtered measured results of SCell(s) and neighbouring cell(s) measurements that became available during the last logging interval, in order of decreasing RSRP, for at most the following number of cells: 6 intra-frequency and 3 inter-frequency cells per frequency and according to the following:

6> for each cell included, include the optional fields that are available;

5> if available, optionally set the *measResultNeighCells* to include the layer 3 filtered measured results of neighbouring cell(s) measurements that became available during the last logging interval, in order of decreasing RSCP(UTRA)/RSSI(GERAN)/PilotStrength(cdma2000), for at most the following number of cells: 3 inter-RAT cells per frequency (UTRA, cdma2000)/set of frequencies (GERAN), and according to the following:

6> for each cell included, include the optional fields that are available;

4> if in RRC_IDLE:

5> set the *servCellIdentity* to indicate global cell identity of the serving cell;

5> set the *measResultServCell* to include the quantities of the serving cell;

5> if available, set the *measResultNeighCells*, in order of decreasing ranking-criterion as used for cell re-selection, to include neighbouring cell measurements that became available during the last logging interval for at most the following number of neighbouring cells: 6 intra-frequency and 3 inter-frequency neighbours per frequency and according to the following:

6> for each neighbour cell included, include the optional fields that are available;

5> if available, optionally set the *measResultNeighCells,* in order of decreasing ranking-criterion as used for cell re-selection, to include neighbouring cell measurements that became available during the last logging interval, for at most the following number of cells: 3 inter-RAT cells per frequency (UTRA, cdma2000)/set of frequencies (GERAN), and according to the following:

6> for each cell included, include the optional fields that are available;

4> for the cells included according to the previous (i.e. covering previous and current serving cells as well as neighbouring EUTRA cells) include results according to the extended RSRQ if corresponding results are available according to the associated performance requirements defined in TS 36.133 [16];

4> for the cells included according to the previous (i.e. covering previous and current serving cells as well as neighbouring EUTRA cells) include RSRQ type if the result was based on measurements using a wider band or using all OFDM symbols;

NOTE 2: The UE includes the latest results in accordance with the performance requirements as specified in TS 36.133 [16]. E.g. RSRP and RSRQ results are available only if the UE has a sufficient number of results/ receives a sufficient number of subframes during the logging interval.

3> else:

4> set the *servCellIdentity* to indicate global cell identity of the cell the UE is camping on;

4> set the *measResultServCell* to include the quantities of the cell the UE is camping on;

4> if available, set the *measResultNeighCells*, in order of decreasing ranking-criterion as used for cell re-selection, to include neighbouring cell measurements that became available during the last logging interval for at most the following number of neighbouring cells: 6 intra-frequency and 3 inter-

DAINGEAN_0001960

frequency neighbours per frequency as well as 3 inter-RAT neighbours, per frequency/ set of frequencies (GERAN) per RAT and according to the following:

5> for each neighbour cell included, include the optional fields that are available;

4> for the cells included according to the previous (i.e. covering previous and current serving cells as well as neighbouring EUTRA cells) include results according to the extended RSRQ if corresponding results are available according to the associated performance requirements defined in TS 36.133 [16];

4> for the cells included according to the previous (i.e. covering previous and current serving cells as well as neighbouring EUTRA cells) include RSRQ type if the result was based on measurements using a wider band or using all OFDM symbols;

NOTE 3: The UE includes the latest results of the available measurements as used for cell reselection evaluation in RRC_IDLE or as used for evaluation of reporting criteria or for measurement reporting according to 5.5.3 in RRC_CONNECTED, which are performed in accordance with the performance requirements as specified in TS 36.133 [16].

2> when the memory reserved for the logged measurement information becomes full, stop timer T330 and perform the same actions as performed upon expiry of T330, as specified in 5.6.6.4;

5.6.9 In-device coexistence indication

5.6.9.1 General

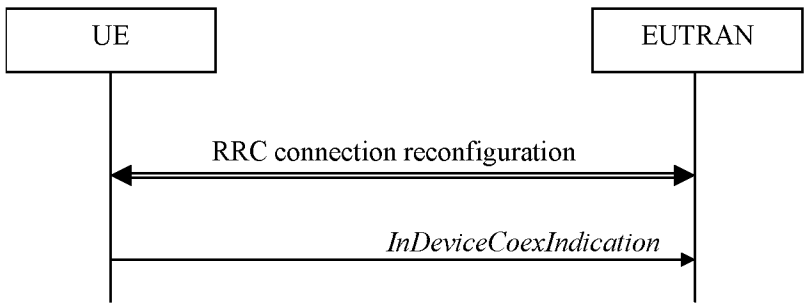


Figure 5.6.9.1-1: In-device coexistence indication

The purpose of this procedure is to inform E-UTRAN about (a change of) the In-Device Coexistence (IDC) problems experienced by the UE in RRC_CONNECTED, as described in TS 36.300 [9], and to provide the E-UTRAN with information in order to resolve them.

5.6.9.2 Initiation

A UE capable of providing IDC indications may initiate the procedure when it is configured to provide IDC indications and upon change of IDC problem information.

Upon initiating the procedure, the UE shall:

1> if configured to provide IDC indications:

2> if the UE did not transmit an *InDeviceCoexIndication* message since it was configured to provide IDC indications:

3> if on one or more frequencies for which a *measObjectEUTRA* is configured, the UE is experiencing IDC problems that it cannot solve by itself; or

3> if configured to provide IDC indications for UL CA; and if on one or more supported UL CA combination comprising of carrier frequencies for which a measurement object is configured, the UE is experiencing IDC problems that it cannot solve by itself:

4> initiate transmission of the *InDeviceCoexIndication* message in accordance with 5.6.9.3;

DAINGEAN_0001961

2> else:

3> if the set of frequencies, for which a *measObjectEUTRA* is configured and on which the UE is experiencing IDC problems that it cannot solve by itself, is different from the set indicated in the last transmitted *InDeviceCoexIndication* message; or

3> if for one or more of the frequencies in the previously reported set of frequencies, the *interferenceDirection* is different from the value indicated in the last transmitted *InDeviceCoexIndication* message; or

3> if the TDM assistance information is different from the assistance information included in the last transmitted *InDeviceCoexIndication* message; or

3> if configured to provide IDC indications for UL CA; and if the *victimSystemType* is different from the value indicated in the last transmitted *InDeviceCoexIndication* message; or

3> if configured to provide IDC indications for UL CA; and if the set of supported UL CA combinations on which the UE is experiencing IDC problems that it cannot solve by itself and that the UE includes in *affectedCarrierFreqCombList* according to 5.6.9.3, is different from the set indicated in the last transmitted *InDeviceCoexIndication* message:

4> initiate transmission of the *InDeviceCoexIndication* message in accordance with 5.6.9.3;

NOTE 1: The term "IDC problems" refers to interference issues applicable across several subframes/slots where not necessarily all the subframes/slots are affected.

NOTE 2: For the frequencies on which a serving cell or serving cells is configured that is activated, IDC problems consist of interference issues that the UE cannot solve by itself, during either active data exchange or upcoming data activity which is expected in up to a few hundred milliseconds.
For frequencies on which a SCell or SCells is configured that is deactivated, reporting IDC problems indicates an anticipation that the activation of the SCell or SCells would result in interference issues that the UE would not be able to solve by itself.
For a non-serving frequency, reporting IDC problems indicates an anticipation that if the non-serving frequency or frequencies became a serving frequency or serving frequencies then this would result in interference issues that the UE would not be able to solve by itself.

5.6.9.3 Actions related to transmission of *InDeviceCoexIndication* message

The UE shall set the contents of the *InDeviceCoexIndication* message as follows:

1> if there is at least one E-UTRA carrier frequency, for which a measurement object is configured, that is affected by IDC problems:

2> include the field *affectedCarrierFreqList* with an entry for each affected E-UTRA carrier frequency for which a measurement object is configured;

2> for each E-UTRA carrier frequency included in the field *affectedCarrierFreqList*, include *interferenceDirection* and set it accordingly;

2> include Time Domain Multiplexing (TDM) based assistance information:

3> if the UE has DRX related assistance information that could be used to resolve the IDC problems:

4> include *drx-CycleLength*, *drx-Offset* and *drx-ActiveTime*;

3> else (the UE has desired subframe reservation patterns related assistance information that could be used to resolve the IDC problems):

4> include *idc-SubframePatternList*;

3> use the MCG as timing reference if TDM based assistance information regarding the SCG is included;

1> if the UE is configured to provide UL CA information and there is a supported UL CA combination comprising of carrier frequencies for which a measurement object is configured, that is affected by IDC problems:

DAINGEAN_0001962

2> include *victimSystemType* in *ul-CA-AssistanceInfo*;

2> if the UE sets *victimSystemType* to *wlan* or *Bluetooth*:

3> include *affectedCarrierFreqCombList* in *ul-CA-AssistanceInfo* with an entry for each supported UL CA combination comprising of carrier frequencies for which a measurement object is configured, that is affected by IDC problems;

2> else:

3> optionally include *affectedCarrierFreqCombList* in *ul-CA-AssistanceInfo* with an entry for each supported UL CA combination comprising of carrier frequencies for which a measurement object is configured, that is affected by IDC problems;

NOTE 1: When sending an *InDeviceCoexIndication* message to inform E-UTRAN the IDC problems, the UE includes all assistance information (rather than providing e.g. the changed part(s) of the assistance information).

NOTE 2: Upon not anymore experiencing a particular IDC problem that the UE previously reported, the UE provides an IDC indication with the modified contents of the *InDeviceCoexIndication* message (e.g. by an empty message).

The UE shall submit the *InDeviceCoexIndication* message to lower layers for transmission.

5.6.10 UE Assistance Information

5.6.10.1 General

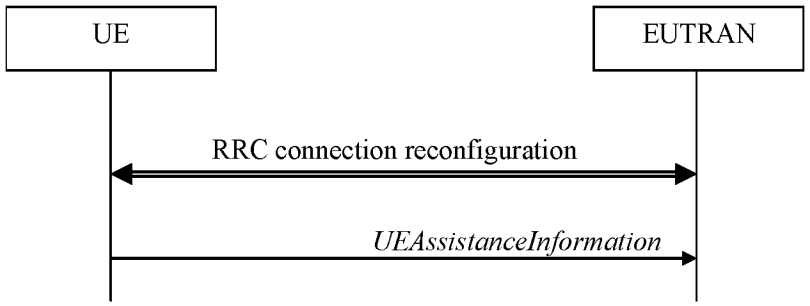


Figure 5.6.10.1-1: UE Assistance Information

The purpose of this procedure is to inform E-UTRAN of the UE's power saving preference. Upon configuring the UE to provide power preference indications E-UTRAN may consider that the UE does not prefer a configuration primarily optimised for power saving until the UE explictly indicates otherwise.

5.6.10.2 Initiation

A UE capable of providing power preference indications in RRC_CONNECTED may initiate the procedure in several cases including upon being configured to provide power preference indications and upon change of power preference.

Upon initiating the procedure, the UE shall:

1> if configured to provide power preference indications:

2> if the UE did not transmit a *UEAssistanceInformation* message since it was configured to provide power preference indications; or

2> if the current power preference is different from the one indicated in the last transmission of the *UEAssistanceInformation* message and timer T340 is not running:

3> initiate transmission of the *UEAssistanceInformation* message in accordance with 5.6.10.3;

DAINGEAN_0001963

5.6.10.3 Actions related to transmission of *UEAssistanceInformation* message

The UE shall set the contents of the *UEAssistanceInformation* message:

1> if the UE prefers a configuration primarily optimised for power saving:

2> set *powerPrefIndication* to *lowPowerConsumption*;

1> else:

2> start or restart timer T340 with the timer value set to the *powerPrefIndicationTimer*;

2> set *powerPrefIndication* to *normal*;

The UE shall submit the *UEAssistanceInformation* message to lower layers for transmission.

5.6.11 Mobility history information

5.6.11.1 General

This procedure specifies how the mobility history information is stored by the UE, covering RRC_CONNECTED and RRC_IDLE.

5.6.11.2 Initiation

If the UE supports storage of mobility history information, the UE shall:

1> Upon change of cell, consisting of PCell in RRC_CONNECTED or serving cell in RRC_IDLE, to another E-UTRA or inter-RAT cell or when entering out of service:

2> include an entry in variable *VarMobilityHistoryReport* possibly after removing the oldest entry, if necessary, according to following:

3> if the global cell identity of the previous PCell/ serving cell is available:

4> include the global cell identity of that cell in the field *visitedCellId* of the entry;

3> else:

4> include the physical cell identity and carrier frequency of that cell in the field *visitedCellId* of the entry;

3> set the field *timeSpent* of the entry as the time spent in the previous PCell/ serving cell;

1> upon entering E-UTRA (in RRC_CONNECTED or RRC_IDLE) while previously out of service and/ or using another RAT:

2> include an entry in variable *VarMobilityHistoryReport* possibly after removing the oldest entry, if necessary, according to following:

3> set the field *timeSpent* of the entry as the time spent outside E-UTRA;

5.6.12 RAN-assisted WLAN interworking

5.6.12.1 General

The purpose of this procedure is to facilitate access network selection and traffic steering between E-UTRAN and WLAN.

If required by upper layers (see TS 24.312 [66], the UE shall provide an up-to-date set of the applicable parameters provided by *wlan-OffloadConfigCommon* or *wlan-OffloadConfigDedicated* to upper layers, and inform upper layers when no parameters are configured. The parameter set from either *wlan-OffloadConfigCommon* or *wlan-OffloadConfigDedicated* is selected as specified in subclauses 5.2.2.24, 5.3.12, 5.6.12.2 and 5.6.12.4.

DAINGEAN_0001964

5.6.12.2 Dedicated WLAN offload configuration

The UE shall:

1> if the received *wlan-OffloadInfo* is set to *release*:

2> release *wlan-OffloadConfigDedicated* and *t350*;

2> if the *wlan-OffloadConfigCommon* corresponding to the RPLMN is broadcast by the cell:

3> apply the *wlan-OffloadConfigCommon* corresponding to the RPLMN included in *SystemInformationBlockType17*;

1> else:

2> apply the received *wlan-OffloadConfigDedicated*:

5.6.12.3 WLAN offload RAN evaluation

The UE shall:

1> if the UE is configured with either *wlan-OffloadConfigCommon* or *wlan-OffloadConfigDedicated*; and

1> if the UE is in RRC_IDLE or none of *rclwi-Configuration, lwa-Configuration* and *lwip-Configuration* is configured:

2> provide measurement results required for the evaluation of the network selection and traffic steering rules as defined in TS 24.312 [66] to upper layers;

2> evaluate the network selection and traffic steering rules as defined in TS 36.304 [4] using WLAN identifiers as indicated in other subclauses (either provided in *steerToWLAN* included in *rclwi-Configuration* or in *wlan-Id-List* included in *SystemInformationBlockType17*);

5.6.12.4 T350 expiry or stop

The UE shall:

1> if T350 expires or is stopped:

2> release the *wlan-OffloadConfigDedicated* and *t350*;

2> release *rclwi-Configuration* if configured;

2> if the *wlan-OffloadConfigCommon* corresponding to the RPLMN is broadcast by the cell:

3> apply the *wlan-OffloadConfigCommon* and the *wlan-Id-List* corresponding to the RPLMN included in *SystemInformationBlockType17*;

5.6.12.5 Cell selection/ re-selection while T350 is running

The UE shall:

1> if, while T350 is running, the UE selects/ reselects a cell which is not the PCell when the *wlan-OffloadDedicated* was configured:

2> stop timer T350;

2> perform the actions as specified in 5.6.12.4;

DAINGEAN_0001965

5.6.13 SCG failure information

5.6.13.1 General

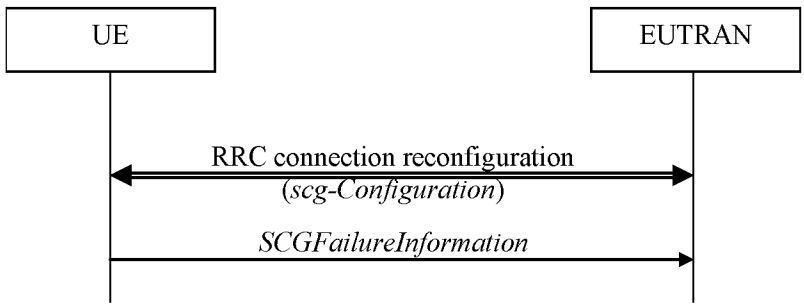


Figure 5.6.13.1-1: SCG failure information

The purpose of this procedure is to inform E-UTRAN about an SCG failure the UE has experienced i.e. SCG radio link failure, SCG change failure.

5.6.13.2 Initiation

A UE initiates the procedure to report SCG failures when SCG transmission is not suspended and when one of the following conditions is met:

1> upon detecting radio link failure for the SCG, in accordance with 5.3.11; or

1> upon SCG change failure, in accordance with 5.3.5.7a; or

1> upon stopping uplink transmission towards the PSCell due to exceeding the maximum uplink transmission timing difference when *powerControlMode* is configured to 1, in accordance with subclause 7.17.2 of TS 36.133 [29].

Upon initiating the procedure, the UE shall:

1> suspend all SCG DRBs and suspend SCG transmission for split DRBs;

1> reset SCG-MAC;

1> stop T307;

1> initiate transmission of the *SCGFailureInformation* message in accordance with 5.6.13.3;

5.6.13.3 Actions related to transmission of *SCGFailureInformation* message

The UE shall set the contents of the *SCGFailureInformation* message as follows:

1> if the UE initiates transmission of the *SCGFailureInformation* message to provide SCG radio link failure information:

2> include *failureType* and set it to the trigger for detecting SCG radio link failure;

1> else if the UE initiates transmission of the *SCGFailureInformation* message to provide SCG change failure information:

2> include *failureType* and set it to *scg-ChangeFailure*;

1> else if the UE initiates transmission of the *SCGFailureInformation* message due to exceeding maximum uplink transmission timing difference:

2> include *failureType* and set it to *maxUL-TimingDiff*;

DAINGEAN_0001966

1> set the *measResultServFreqList* to include for each SCG cell that is configured, if any, within *measResultSCell* the quantities of the concerned SCell, if available according to performance requirements in [16];

1> for each SCG serving frequency included in *measResultServFreqList*, include within *measResultBestNeighCell* the *physCellId* and the quantities of the best non-serving cell, based on RSRP, on the concerned serving frequency;

1> set the *measResultNeighCells* to include the best measured cells on non-serving E-UTRA frequencies, ordered such that the best cell is listed first, and based on measurements collected up to the moment the UE detected the failure, and set its fields as follows;

2> if the UE was configured to perform measurements for one or more non-serving EUTRA frequencies and measurement results are available, include the *measResultListEUTRA*;

2> for each neighbour cell included, include the optional fields that are available;

NOTE 2: The measured quantities are filtered by the L3 filter as configured in the mobility measurement configuration. The measurements are based on the time domain measurement resource restriction, if configured. Blacklisted cells are not required to be reported.

The UE shall submit the *SCGFailureInformation* message to lower layers for transmission.

5.6.14 LTE-WLAN Aggregation

5.6.14.1 Introduction

E-UTRAN can configure the UE to connect to a WLAN and configure bearers for LWA (referred to as LWA DRBs). The UE uses the WLAN parameters received from E-UTRAN in performing WLAN measurements. The UE also performs WLAN connection management as described in 5.6.15 while LWA is configured.

5.6.14.2 Reception of LWA configuration

Upon reception of LWA configuration, the UE shall:

1> if the received *lwa-Configuration* is set to *release*:

2> release the LWA configuration as described in 5.6.14.3;

1> else:

2> if the received *lwa-Config* includes *lwa-WT-Counter*:

3> determine the S-K_{WT} key based on the K_{eNB} key and received *lwa-WT-Counter* value, as specified in TS 33.401 [32];

3> forward the S-K_{WT} key to upper layers to be used as a Pairwise Master Key for WLAN authentication;

2> if the received *lwa-Config* includes *lwa-MobilityConfig:*

3> if the received *lwa-MobilityConfig* includes *wlanToReleaseList*:

4> for each *WLAN-Identifiers* included in *wlanToReleaseList*:

5> remove *WLAN-Identifiers* if already part of the current *wlan-MobilitySet* in *VarWLAN-MobilityConfig;*

3> if the received *lwa-MobilityConfig* includes *wlanToAddList*:

4> for each *WLAN-Identifiers* included in *wlanToAddList*:

5> add *WLAN-Identifiers* to the current *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

3> if the received *lwa-MobilityConfig* includes *associationTimer*:

4> start or restart timer T351 with the timer value set to the *associationTimer*;

DAINGEAN_0001967

3> if the received *lwa-MobilityConfig* includes *successReportRequested*:

4> set *successReportRequested* in *VarWLAN-MobilityConfig* to the value of *successReportRequested*;

3> start WLAN Status Monitoring as described in 5.6.15.4;

5.6.14.3 Release of LWA configuration

To release the LWA configuration, the UE shall:

1> for each LWA DRB that is part of the current UE configuration:

2> disable data handling for this DRB at the LWAAP entity;

2> perform PDCP data recovery as specified in TS 36.323 [8];

1> delete any existing values in *VarWLAN-MobilityConfig* and *VarWLAN-Status;*

1> stop timer T351, if running;

1> stop WLAN status monitoring and WLAN connection attempts;

5.6.15 WLAN connection management

5.6.15.1 Introduction

WLAN connection management procedures in this section are triggered as specified in other sections where the UE is using a WLAN connection for LWA, RCLWI or LWIP.

The UE stores the current WLAN mobility set, which is a set of one or more WLAN identifier(s) (e.g. BSSID, SSID, HESSID) in *wlan-MobilitySet* in *VarWLAN-MobilityConfig*. This WLAN mobility set can be configured and updated by the eNB. A WLAN is considered to be inside the WLAN mobility set if its identifiers match all WLAN identifiers of at least one entry in *wlan-MobilitySet* and outside the WLAN mobility set otherwise. When the UE receives a new or updated WLAN mobility set, it initiates connection to a WLAN inside the WLAN mobility set, if not already connected to such a WLAN, and starts WLAN status monitoring as described in 5.6.15.4. The UE can perform WLAN mobility within the WLAN mobility set (connect or reconnect to a WLAN inside the WLAN mobility set) without any signalling to E-UTRAN.

The UE reports the WLAN connection status information to E-UTRAN as described in 5.6.15.2. The information in this report is based on the monitoring of WLAN connection as described in 5.6.15.4.

5.6.15.2 WLAN connection status reporting

5.6.15.2.1 General



Figure 5.6.15.2.1-1: WLAN connection status reporting

The purpose of this procedure is to inform E-UTRAN about the status of WLAN connection for LWA, RCLWI, or LWIP.

DAINGEAN_0001968

5.6.15.2.2 Initiation

The UE in RRC_CONNECTED initiates the WLAN status reporting procedure when it connects successfully to a WLAN inside WLAN mobility set while T351 is running after a WLAN mobility set change (if success report is requested by the eNB) or its connection or connection attempt to all WLAN(s) inside WLAN mobility set fails in accordance with WLAN Status Monitoring described in 5.6.15.4 or when T351 expires.

Upon initiating the procedure, the UE shall:

1> initiate transmission of the *WLANConnectionStatusReport* message in accordance with 5.6.15.2.3;

5.6.15.2.3 Actions related to transmission of *WLANConnectionStatusReport* message

The UE shall set the contents of the *WLANConnectionStatusReport* message as follows:

1> set *wlan-status* to *status* in *VarWLAN-Status;*

1> submit the *WLANConnectionStatusReport* message to lower layers for transmission, upon which the procedure ends;

5.6.15.3 T351 Expiry (WLAN connection attempt timeout)

Upon T351 expiry, the UE shall:

1> set the *status* in *VarWLAN-Status* to *failureTimeout*;

1> perform WLAN connection status reporting procedure in 5.6.15.2;

1> stop WLAN status monitoring and WLAN connection attempts;

5.6.15.4 WLAN status monitoring

To perform WLAN status monitoring, the UE shall:

1> if UE is not configured with *rclwi-Configuration* and WLAN connection to a WLAN inside the WLAN mobility set is successfully established or maintained after a WLAN mobility set configuration update or after a *lwa-WT-Counter* update:

2> set the *status* in *VarWLAN-Status* to *successfulAssociation*;

2> stop timer T351, if running;

2> if *successReportRequested* in *VarWLAN-MobilityConfig* is set to *TRUE*:

3> perform WLAN Connection Status Reporting procedure in 5.6.15.2;

1> if WLAN connection or connection attempt to all WLAN(s) inside WLAN mobility set fails:

2> if the failure is due to WLAN radio link issues:

3> set the *status* in *VarWLAN-Status* to *failureWlanRadioLink;*

2> else if the failure is due to UE internal problems related to WLAN:

3> set the *status* in *VarWLAN-Status* to *failureWlanUnavailable;*

NOTE 1: The UE internal problems related to WLAN includes connection to another WLAN based on user preferences or turning off WLAN connection or connection rejection from WLAN or other WLAN problems.

2> stop timer T351, if running;

2> perform WLAN Connection Status Reporting procedure in 5.6.15.2;

2> if the UE is configured with *rclwi-Configuration*:

DAINGEAN_0001969

3> release *rclwi-Configuration* and inform upper layers of a move-traffic-from-WLAN indication (see TS 24.302 [74]);

2> stop WLAN Status Monitoring and WLAN connection attempts;

5.6.16 RAN controlled LTE-WLAN interworking

5.6.16.1 General

The purpose of this procedure is to perform RAN-controlled LTE-WLAN interworking (RCLWI) i.e. control access network selection and traffic steering between E-UTRAN and WLAN.

5.6.16.2 WLAN traffic steering command

The UE shall:

1> if the received *rclwi-Configuration* is set to *setup*:

2> if the *command* is set to *steerToWLAN*:

3> inform the upper layers of a move-trafic-to-WLAN-indication along with the WLAN identifier lists in *steerToWLAN* (see TS 24.302 [74]);

3> store *steerToWLAN* in *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

3> perform the WLAN status monitoring procedure as specified in 5.6.15.4 using *steerToWLAN* as the WLAN mobility set;

2> else:

3> inform the upper layer of a move-traffic-from-WLAN indication (see TS 24.302 [74]);

3> clear *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

3> stop performing the WLAN status monitoring procedure as specified in 5.6.15.4;

3> delete any existing values in *VarWLAN-Status*;

1> else:

2> clear *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

2> stop performing the WLAN status monitoring procedure as specified in 5.6.15.4.

2> delete any existing values in *VarWLAN-Status*;

5.6.17 LTE-WLAN aggregation with IPsec tunnel

5.6.17.1 General

The WLAN resources that are used over the LWIP tunnel as described in TS 36.300 [9] established as part of LWIP procedures are referred to as 'LWIP resources'. The purpose of this section is to specify procedures to indicate to higher layers to initiate the establishment/ release of the LWIP tunnel over WLAN and to indicate which DRB(s) shall use the LWIP resources.

5.6.17.2 LWIP reconfiguration

The UE shall:

1> if the received *lwip-Configuration* is set to *release*:

2> release the LWIP configuration, if configured, as described in 5.6.17.3;

DAINGEAN_0001970

1> else:

2> if *lwip-MobilityConfig* is included:

3> if the received *lwip-MobilityConfig* includes *wlanToReleaseList*:

4> for each *WLAN-Identifiers* included in *wlanToReleaseList*:

5> remove *WLAN-Identifiers* if already part of the current *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

3> if the received lwip-MobilityConfig includes wlanToAddList:

4> for each *WLAN-Identifiers* included in *wlanToAddList*:

5> add *WLAN-Identifiers* to the current *wlan-MobilitySet* in *VarWLAN-MobilityConfig*;

3> if the received lwip-MobilityConfig includes associationTimer:

4> start timer T351 with the timer value set according to the value of *associationTimer*;

3> set successReportRequested in VarWLAN-MobilityConfig to the value of successReportRequested;

3> start WLAN Status Monitoring as described in 5.6.15.4;

2> if *tunnelConfigLWIP* is included:

3> indicate to higher layers to configure the LWIP tunnel according to the received *tunnelConfigLWIP* [32];

2> if *lwip-Counter* is included:

3> determine the LWIP-PSK key based on the K_{eNB} and received *lwip-Counter* value, as specified in TS 33.401 [32];

3> forward the LWIP-PSK key to upper layers for LWIP tunnel establishment;

5.6.17.3 LWIP release

The UE shall:

1> delete any existing values in *VarWLAN-MobilityConfig* and *VarWLAN-Status*;

1> stop timer T351, if running;

1> release the entire LWIP RRC configuration;

1> indicate to higher layers to stop all DRBs from using the LWIP resources;

1> indicate to higher layers to release the LWIP tunnel [32];

5.7 Generic error handling

5.7.1 General

The generic error handling defined in the subsequent sub-clauses applies unless explicitly specified otherwise e.g. within the procedure specific error handling.

The UE shall consider a value as not comprehended when it is set:

- to an extended value that is not defined in the version of the transfer syntax supported by the UE.
- to a spare or reserved value unless the specification defines specific behaviour that the UE shall apply upon receiving the concerned spare/ reserved value.

The UE shall consider a field as not comprehended when it is defined:

DAINGEAN_0001971

- as spare or reserved unless the specification defines specific behaviour that the UE shall apply upon receiving the concerned spare/ reserved field.

5.7.2 ASN.1 violation or encoding error

The UE shall:

1> when receiving an RRC message on the BCCH, BR-BCCH, PCCH, CCCH, MCCH, SC-MCCH or SBCCH for which the abstract syntax is invalid [13]:

2> ignore the message;

NOTE: This section applies in case one or more fields is set to a value, other than a spare, reserved or extended value, not defined in this version of the transfer syntax. E.g. in the case the UE receives value 12 for a field defined as INTEGER (1..11). In cases like this, it may not be possible to reliably detect which field is in the error hence the error handling is at the message level.

5.7.3 Field set to a not comprehended value

The UE shall, when receiving an RRC message on any logical channel:

1> if the message includes a field that has a value that the UE does not comprehend:

2> if a default value is defined for this field:

3> treat the message while using the default value defined for this field;

2> else if the concerned field is optional:

3> treat the message as if the field were absent and in accordance with the need code for absence of the concerned field;

2> else:

3> treat the message as if the field were absent and in accordance with sub-clause 5.7.4;

5.7.4 Mandatory field missing

The UE shall:

1> if the message includes a field that is mandatory to include in the message (e.g. because conditions for mandatory presence are fulfilled) and that field is absent or treated as absent:

2> if the RRC message was received on DCCH or CCCH:

3> ignore the message;

2> else:

3> if the field concerns a (sub-field of) an entry of a list (i.e. a SEQUENCE OF):

4> treat the list as if the entry including the missing or not comprehended field was not present;

3> else if the field concerns a sub-field of another field, referred to as the 'parent' field i.e. the field that is one nesting level up compared to the erroneous field:

4> consider the 'parent' field to be set to a not comprehended value;

4> apply the generic error handling to the subsequent 'parent' field(s), until reaching the top nesting level i.e. the message level;

3> else (field at message level):

4> ignore the message;

DAINGEAN_0001972

NOTE 1: The error handling defined in these sub-clauses implies that the UE ignores a message with the message type or version set to a not comprehended value.

NOTE 2: The nested error handling for messages received on logical channels other than DCCH and CCCH applies for errors in extensions also, even for errors that can be regarded as invalid E-UTRAN operation e.g. E-UTRAN not observing conditional presence.

The following ASN.1 further clarifies the levels applicable in case of nested error handling for errors in extension fields.

```
-- /example/ ASN1START

-- Example with extension addition group

ItemInfoList ::=                    SEQUENCE (SIZE (1..max)) OF ItemInfo

ItemInfo ::=                        SEQUENCE {
    itemIdentity                        INTEGER (1..max),
    field1                              Field1,
    field2                              Field2                  OPTIONAL,           -- Need ON
    ...
    [[  field3-r9                       Field3-r9               OPTIONAL,           -- Cond Cond1
        field4-r9                       Field4-r9               OPTIONAL            -- Need ON
    ]]
}

-- Example with traditional non-critical extension (empty sequence)

BroadcastInfoBlock1 ::=             SEQUENCE {
    itemIdentity                        INTEGER (1..max),
    field1                              Field1,
    field2                              Field2                  OPTIONAL,           -- Need ON
    nonCriticalExtension                BroadcastInfoBlock1-v940-IEs    OPTIONAL
}

BroadcastInfoBlock1-v940-IEs::= SEQUENCE {
    field3-r9                           Field3-r9               OPTIONAL,           -- Cond Cond1
    field4-r9                           Field4-r9               OPTIONAL,           -- Need ON
    nonCriticalExtension                SEQUENCE {}             OPTIONAL            -- Need OP
}

-- ASN1STOP
```

The UE shall, apply the following principles regarding the levels applicable in case of nested error handling:

- an extension additon group is not regarded as a level on its own. E.g. in the ASN.1 extract in the previous, a error regarding the conditionality of *field3* would result in the entire itemInfo entry to be ignored (rather than just the extension addition group containing *field3* and *field4*)
- a traditional *nonCriticalExtension* is not regarded as a level on its own. E.g. in the ASN.1 extract in the previous, a error regarding the conditionality of *field3* would result in the entire *BroadcastInfoBlock1* to be ignored (rather than just the non critical extension containing *field3* and *field4*).

5.7.5 Not comprehended field

The UE shall, when receiving an RRC message on any logical channel:

1> if the message includes a field that the UE does not comprehend:

2> treat the rest of the message as if the field was absent;

NOTE: This section does not apply to the case of an extension to the value range of a field. Such cases are addressed instead by the requirements in section 5.7.3.

DAINGEAN_0001973

5.8 MBMS

5.8.1 Introduction

5.8.1.1 General

In general the control information relevant only for UEs supporting MBMS is separated as much as possible from unicast control information. Most of the MBMS control information is provided on a logical channel specific for MBMS common control information: the MCCH. E-UTRA employs one MCCH logical channel per MBSFN area. In case the network configures multiple MBSFN areas, the UE acquires the MBMS control information from the MCCHs that are configured to identify if services it is interested to receive are ongoing. The action applicable when the UE is unable to simultaneously receive MBMS and unicast services is up to UE implementation. In this release of the specification, an MBMS capable UE is only required to support reception of a single MBMS service at a time, and reception of more than one MBMS service (also possibly on more than one MBSFN area) in parallel is left for UE implementation. The MCCH carries the *MBSFNAreaConfiguration* message, which indicates the MBMS sessions that are ongoing as well as the (corresponding) radio resource configuration. The MCCH may also carry the *MBMSCountingRequest* message, when E-UTRAN wishes to count the number of UEs in RRC_CONNECTED that are receiving or interested to receive one or more specific MBMS services.

A limited amount of MBMS control information is provided on the BCCH. This primarily concerns the information needed to acquire the MCCH(s). This information is carried by means of a single MBMS specific *SystemInformationBlock*: *SystemInformationBlockType13*. An MBSFN area is identified solely by the *mbsfn-AreaId* in *SystemInformationBlockType13*. At mobility, the UE considers that the MBSFN area is continuous when the source cell and the target cell broadcast the same value in the *mbsfn-AreaId*.

5.8.1.2 Scheduling

The MCCH information is transmitted periodically, using a configurable repetition period. Scheduling information is not provided for MCCH i.e. both the time domain scheduling as well as the lower layer configuration are semi-statically configured, as defined within *SystemInformationBlockType13*.

For MBMS user data, which is carried by the MTCH logical channel, E-UTRAN periodically provides MCH scheduling information (MSI) at lower layers (MAC). This MCH information only concerns the time domain scheduling i.e. the frequency domain scheduling and the lower layer configuration are semi-statically configured. The periodicity of the MSI is configurable and defined by the MCH scheduling period.

5.8.1.3 MCCH information validity and notification of changes

Change of MCCH information only occurs at specific radio frames, i.e. the concept of a modification period is used. Within a modification period, the same MCCH information may be transmitted a number of times, as defined by its scheduling (which is based on a repetition period). The modification period boundaries are defined by SFN values for which SFN mod m= 0, where m is the number of radio frames comprising the modification period. The modification period is configured by means of *SystemInformationBlockType13*.

When the network changes (some of) the MCCH information, it notifies the UEs about the change during a first modification period. In the next modification period, the network transmits the updated MCCH information. These general principles are illustrated in figure 5.8.1.3-1, in which different colours indicate different MCCH information. Upon receiving a change notification, a UE interested to receive MBMS services acquires the new MCCH information immediately from the start of the next modification period. The UE applies the previously acquired MCCH information until the UE acquires the new MCCH information.

DAINGEAN_0001974

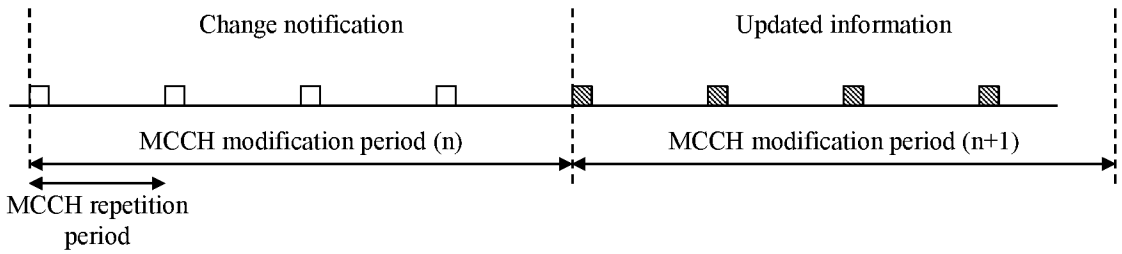


Figure 5.8.1.3-1: Change of MCCH Information

Indication of an MBMS specific RNTI, the M-RNTI (see TS 36.321 [6]), on PDCCH is used to inform UEs in RRC_IDLE and UEs in RRC_CONNECTED about an MCCH information change. When receiving an MCCH information change notification, the UE knows that the MCCH information will change at the next modification period boundary. The notification on PDCCH indicates which of the MCCHs will change, which is done by means of an 8-bit bitmap. Within this bitmap, the bit at the position indicated by the field *notificationIndicator* is used to indicate changes for that MBSFN area: if the bit is set to "1", the corresponding MCCH will change. No further details are provided e.g. regarding which MCCH information will change. The MCCH information change notification is used to inform the UE about a change of MCCH information upon session start or about the start of MBMS counting.

The MCCH information change notifications on PDCCH are transmitted periodically and are carried on MBSFN subframes only. These MCCH information change notification occasions are common for all MCCHs that are configured, and configurable by parameters included in *SystemInformationBlockType13:* a repetition coefficient, a radio frame offset and a subframe index. These common notification occasions are based on the MCCH with the shortest modification period.

NOTE 1: E-UTRAN may modify the MBMS configuration information provided on MCCH at the same time as updating the MBMS configuration information carried on BCCH i.e. at a coinciding BCCH and MCCH modification period. Upon detecting that a new MCCH is configured on BCCH, a UE interested to receive one or more MBMS services should acquire the MCCH, unless it knows that the services it is interested in are not provided by the corresponding MBSFN area.

A UE that is receiving an MBMS service via MRB shall acquire the MCCH information from the start of each modification period. A UE interested to receive MBMS from a carrier on which *dl-Bandwidth* included in *MasterInformationBlock* is set to *n6* shall acquire the MCCH information at least once every MCCH modification period. A UE that is not receiving an MBMS service via MRB, as well as UEs that are receiving an MBMS service via MRB but potentially interested to receive other services not started yet in another MBSFN area from a carrier on which *dl-Bandwidth* included in *MasterInformationBlock* is other than n6, shall verify that the stored MCCH information remains valid by attempting to find the MCCH information change notification at least *notificationRepetitionCoeff* times during the modification period of the applicable MCCH(s), if no MCCH information change notification is received.

NOTE 2: In case the UE is aware which MCCH(s) E-UTRAN uses for the service(s) it is interested to receive, the UE may only need to monitor change notifications for a subset of the MCCHs that are configured, referred to as the 'applicable MCCH(s)' in the above.

5.8.2 MCCH information acquisition

5.8.2.1 General

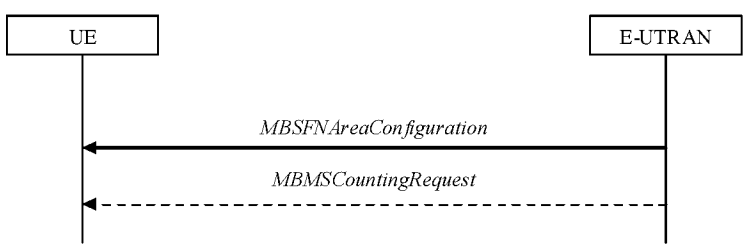


Figure 5.8.2.1-1: MCCH information acquisition

DAINGEAN_0001975

The UE applies the MCCH information acquisition procedure to acquire the MBMS control information that is broadcasted by the E-UTRAN. The procedure applies to MBMS capable UEs that are in RRC_IDLE or in RRC_CONNECTED.

5.8.2.2 Initiation

A UE interested to receive MBMS services shall apply the MCCH information acquisition procedure upon entering the corresponding MBSFN area (e.g. upon power on, following UE mobility) and upon receiving a notification that the MCCH information has changed. A UE that is receiving an MBMS service shall apply the MCCH information acquisition procedure to acquire the MCCH, that corresponds with the service that is being received, at the start of each modification period.

Unless explicitly stated otherwise in the procedural specification, the MCCH information acquisition procedure overwrites any stored MCCH information, i.e. delta configuration is not applicable for MCCH information and the UE discontinues using a field if it is absent in MCCH information unless explicitly specified otherwise.

5.8.2.3 MCCH information acquisition by the UE

An MBMS capable UE shall:

1> if the procedure is triggered by an MCCH information change notification:

2> start acquiring the *MBSFNAreaConfiguration* message and the *MBMSCountingRequest* message if present, from the beginning of the modification period following the one in which the change notification was received;

NOTE 1: The UE continues using the previously received MCCH information until the new MCCH information has been acquired.

1> if the UE enters an MBSFN area:

2> acquire the *MBSFNAreaConfiguration* message and the *MBMSCountingRequest* message if present, at the next repetition period;

1> if the UE is receiving an MBMS service:

2> start acquiring the *MBSFNAreaConfiguration* message and the *MBMSCountingRequest* message if present, that both concern the MBSFN area of the service that is being received, from the beginning of each modification period;

5.8.2.4 Actions upon reception of the *MBSFNAreaConfiguration* message

No UE requirements related to the contents of this *MBSFNAreaConfiguration* apply other than those specified elsewhere e.g. within procedures using the concerned system information, the corresponding field descriptions.

5.8.2.5 Actions upon reception of the *MBMSCountingRequest* message

Upon receiving *MBMSCountingRequest* message, the UE shall perform the MBMS Counting procedure as specified in 5.8.4.

5.8.3 MBMS PTM radio bearer configuration

5.8.3.1 General

The MBMS PTM radio bearer configuration procedure is used by the UE to configure RLC, MAC and the physical layer upon starting and/or stopping to receive an MRB. The procedure applies to UEs interested to receive one or more MBMS services.

NOTE: In case the UE is unable to receive an MBMS service due to capability limitations, upper layers may take appropriate action e.g. terminate a lower priority unicast service.

DAINGEAN_0001976

5.8.3.2 Initiation

The UE applies the MRB establishment procedure to start receiving a session of a service it has an interest in. The procedure may be initiated e.g. upon start of the MBMS session, upon (re-)entry of the corresponding MBSFN service area, upon becoming interested in the MBMS service, upon removal of UE capability limitations inhibiting reception of the concerned service.

The UE applies the MRB release procedure to stop receiving a session. The procedure may be initiated e.g. upon stop of the MBMS session, upon leaving the corresponding MBSFN service area, upon losing interest in the MBMS service, when capability limitations start inhibiting reception of the concerned service.

5.8.3.3 MRB establishment

Upon MRB establishment, the UE shall:

1> establish an RLC entity in accordance with the configuration specified in 9.1.1.4;

1> configure an MTCH logical channel in accordance with the received *locgicalChannelIdentity*, applicable for the MRB, as included in the *MBSFNAreaConfiguration* message;

1> configure the physical layer in accordance with the *pmch-Config*, applicable for the MRB, as included in the *MBSFNAreaConfiguration* message;

1> inform upper layers about the establishment of the MRB by indicating the corresponding *tmgi* and *sessionId*;

5.8.3.4 MRB release

Upon MRB release, the UE shall:

1> release the RLC entity as well as the related MAC and physical layer configuration;

1> inform upper layers about the release of the MRB by indicating the corresponding *tmgi* and *sessionId*;

5.8.4 MBMS Counting Procedure

5.8.4.1 General

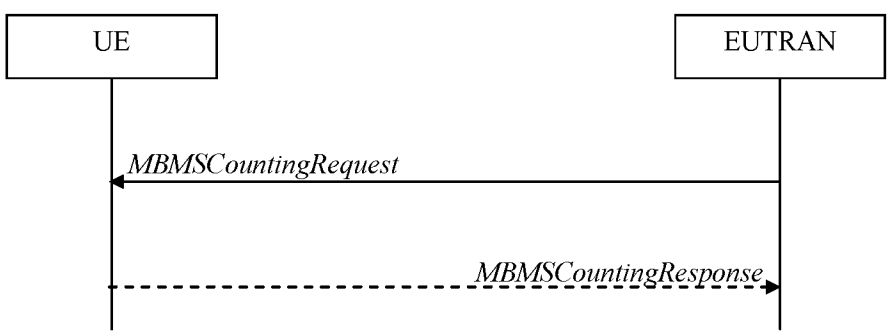


Figure 5.8.4.1-1: MBMS Counting procedure

The MBMS Counting procedure is used by the E-UTRAN to count the number of RRC_CONNECTED mode UEs which are receiving via an MRB or interested to receive via an MRB the specified MBMS services.

The UE determines interest in an MBMS service, that is identified by the TMGI, by interaction with upper layers.

5.8.4.2 Initiation

E-UTRAN initiates the procedure by sending an *MBMSCountingRequest* message.

DAINGEAN_0001977

5.8.4.3 Reception of the *MBMSCountingRequest* message by the UE

Upon receiving the *MBMSCountingRequest* message, the UE in RRC_CONNECTED mode shall:

1> if the *SystemInformationBlockType1*, that provided the scheduling information for the *systemInformationBlockType13* that included the configuration of the MCCH via which the *MBMSCountingRequest* message was received, contained the identity of the Registered PLMN; and

1> if the UE is receiving via an MRB or interested to receive via an MRB at least one of the services in the received *countingRequestList:*

2> if more than one entry is included in the *mbsfn-AreaInfoList* received in the *SystemInformationBlockType13* that included the configuration of the MCCH via which the *MBMSCountingRequest* message was received*:*

3> include the *mbsfn-AreaIndex* in the *MBMSCountingResponse* message and set it to the index of the entry in the *mbsfn-AreaInfoList* within the received *SystemInformationBlockType13* that corresponds with the MBSFN area used to transfer the received *MBMSCountingRequest* message;

2> for each MBMS service included in the received *countingRequestList*:

3> if the UE is receiving via an MRB or interested to receive via an MRB this MBMS service:

4> include an entry in the *countingResponseList* within the *MBMSCountingResponse* message with *countingResponseService* set it to the index of the entry in the *countingRequestList* within the received *MBMSCountingRequest* that corresponds with the MBMS service the UE is receiving or interested to receive;

2> submit the *MBMSCountingResponse* message to lower layers for transmission upon which the procedure ends;

NOTE 1: UEs that are receiving an MBMS User Service [56] by means of a Unicast Bearer Service [57] (i.e. via a DRB), but are interested to receive the concerned MBMS User Service [56] via an MBMS Bearer Service (i.e. via an MRB), respond to the counting request.

NOTE 2: If ciphering is used at upper layers, the UE does not respond to the counting request if it can not decipher the MBMS service for which counting is performed (see TS 22.146 [62, 5.3]).

NOTE 3: The UE treats the *MBMSCountingRequest* messages received in each modification period independently. In the unlikely case E-UTRAN would repeat an *MBMSCountingRequest* (i.e. including the same services) in a subsequent modification period, the UE responds again. The UE provides at most one *MBMSCountingResponse* message to multiple transmission attempts of an *MBMSCountingRequest* messages in a given modification period.

5.8.5 MBMS interest indication

5.8.5.1 General

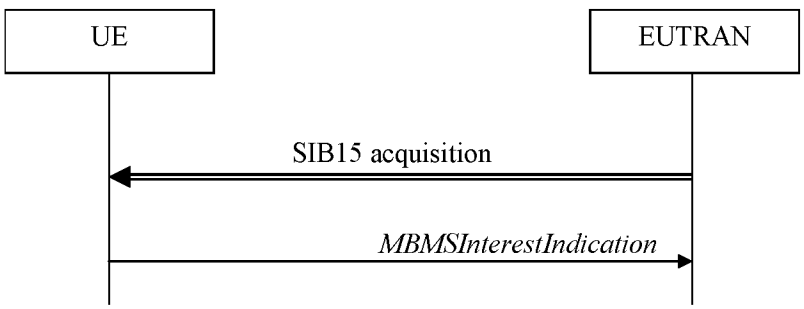


Figure 5.8.5.1-1: MBMS interest indication

The purpose of this procedure is to inform E-UTRAN that the UE is receiving or is interested to receive MBMS service(s) via an MRB or SC-MRB, and if so, to inform E-UTRAN about the priority of MBMS versus unicast reception.

DAINGEAN_0001978

5.8.5.2 Initiation

An MBMS or SC-PTM capable UE in RRC_CONNECTED may initiate the procedure in several cases including upon successful connection establishment, upon entering or leaving the service area, upon session start or stop, upon change of interest, upon change of priority between MBMS reception and unicast reception or upon change to a PCell broadcasting *SystemInformationBlockType15*.

Upon initiating the procedure, the UE shall:

1> if *SystemInformationBlockType15* is broadcast by the PCell:

2> ensure having a valid version of *SystemInformationBlockType15* for the PCell;

2> if the UE did not transmit an *MBMSInterestIndication* message since last entering RRC_CONNECTED state; or

2> if since the last time the UE transmitted an *MBMSInterestIndication* message, the UE connected to a PCell not broadcasting *SystemInformationBlockType15*:

3> if the set of MBMS frequencies of interest, determined in accordance with 5.8.5.3, is not empty:

4> initiate transmission of the *MBMSInterestIndication* message in accordance with 5.8.5.4;

2> else:

3> if the set of MBMS frequencies of interest, determined in accordance with 5.8.5.3, has changed since the last transmission of the *MBMSInterestIndication* message; or

3> if the prioritisation of reception of all indicated MBMS frequencies compared to reception of any of the established unicast bearers has changed since the last transmission of the *MBMSInterestIndication* message:

4> initiate transmission of the *MBMSInterestIndication* message in accordance with 5.8.5.4;

NOTE: The UE may send an *MBMSInterestIndication* even when it is able to receive the MBMS services it is interested in i.e. to avoid that the network allocates a configuration inhibiting MBMS reception.

3> else if *SystemInformationBlockType20* is broadcast by the PCell:

4> if since the last time the UE transmitted an *MBMSInterestIndication* message, the UE connected to a PCell not broadcasting *SystemInformationBlockType20*; or

4> if the set of MBMS services of interest determined in accordance with 5.8.5.3a is different from *mbms-Services* included in the last transmission of the *MBMSInterestIndication* message;

5> initiate the transmission of the *MBMSInterestIndication* message in accordance with 5.8.5.4.

5.8.5.3 Determine MBMS frequencies of interest

The UE shall:

1> consider a frequency to be part of the MBMS frequencies of interest if the following conditions are met:

2> at least one MBMS session the UE is receiving or interested to receive via an MRB or SC-MRB is ongoing or about to start; and

NOTE 1: The UE may determine whether the session is ongoing from the start and stop time indicated in the User Service Description (USD), see 3GPP TS 36.300 [9] or 3GPP TS 26.346 [57].

2> for at least one of these MBMS sessions *SystemInformationBlockType15* acquired from the PCell includes for the concerned frequency one or more MBMS SAIs as indicated in the USD for this session; and

NOTE 2: The UE considers a frequency to be part of the MBMS frequencies of interest even though E-UTRAN may (temporarily) not employ an MRB or SC-MRB for the concerned session. I.e. the UE does not verify if the session is indicated on (SC-)MCCH

DAINGEAN_0001979

NOTE 3: The UE considers the frequencies of interest independently of any synchronization state, e.g. [9, Annex J.1]

2> the UE is capable of simultaneously receiving MRBs and/or is capable of simultaneously receiving SC-MRBs on the set of MBMS frequencies of interest, regardless of whether a serving cell is configured on each of these frequencies or not; and

2> the *supportedBandCombination* the UE included in *UE-EUTRA-Capability* contains at least one band combination including the set of MBMS frequencies of interest;

NOTE 4: Indicating a frequency implies that the UE supports *SystemInformationBlockType13* or *SystemInformationBlockType20* acquisition for the concerned frequency i.e. the indication should be independent of whether a serving cell is configured on that frequency.

NOTE 5: When evaluating which frequencies it can receive simultaneously, the UE does not take into account the serving frequencies that are currently configured i.e. it only considers MBMS frequencies it is interested to receive.

NOTE 6: The set of MBMS frequencies of interest includes at most one frequency for a given physical frequency. The UE only considers a physical frequency to be part of the MBMS frequencies of interest if it supports at least one of the bands indicated for this physical frequency in *SystemInformationBlockType1* (for serving frequency) or *SystemInformationBlockType15* (for neighbouring frequencies). In this case, E-UTRAN may assume the UE supports MBMS reception on any of the bands supported by the UE (i.e. according to *supportedBandCombination*).

5.8.5.3a Determine MBMS services of interest

The UE shall:

1> consider a MBMS service to be part of the MBMS services of interest if the following conditions are met:

2> the UE is SC-PTM capable; and

2> the UE is receiving or interested to receive this service via an SC-MRB; and

2> one session of this service is ongoing or about to start; and

2> one or more MBMS SAIs in the USD for this service is included in *SystemInformationBlockType15* acquired from the PCell for a frequency belonging to the set of MBMS frequencies of interest, determined according to 5.8.5.3.

5.8.5.4 Actions related to transmission of *MBMSInterestIndication* message

The UE shall set the contents of the *MBMSInterestIndication* message as follows:

1> if the set of MBMS frequencies of interest, determined in accordance with 5.8.5.3, is not empty:

2> include *mbms-FreqList* and set it to include the MBMS frequencies of interest sorted by decreasing order of interest, using the EARFCN corresponding with *freqBandIndicator* included in *SystemInformationBlockType1* (for serving frequency), if applicable, and the EARFCN(s) as included in *SystemInformationBlockType15* (for neighbouring frequencies);

NOTE 1: The EARFCN included in *mbms-FreqList* is merely used to indicate a physical frequency the UE is interested to receive i.e. the UE may not support the band corresponding to the included EARFCN (but it does support at least one of the bands indicated in system information for the concerned physical frequency).

2> include *mbms-Priority* if the UE prioritises reception of all indicated MBMS frequencies above reception of any of the unicast bearers;

2> if *SystemInformationBlockType20* is broadcast by the PCell:

3> include *mbms-Services* and set it to indicate the set of MBMS services of interest determined in accordance with 5.8.5.3a;

DAINGEAN_0001980

NOTE 2: If the UE prioritises MBMS reception and unicast data cannot be supported because of congestion on the MBMS carrier(s), E-UTRAN may initiate release of unicast bearers. It is up to E-UTRAN implementation whether all bearers or only GBR bearers are released. E-UTRAN does not initiate re-establishment of the released unicast bearers upon alleviation of the congestion.

The UE shall submit the *MBMSInterestIndication* message to lower layers for transmission.

5.8a SC-PTM

5.8a.1 Introduction

5.8a.1.1 General

SC-PTM control information is provided on a specific logical channel: the SC-MCCH. The SC-MCCH carries the *SCPTMConfiguration* message which indicates the MBMS sessions that are ongoing as well as the (corresponding) information on when each session may be scheduled, i.e.scheduling period, scheduling window and start offset. The *SCPTMConfiguration* message also provides information about the neighbour cells transmitting the MBMS sessions which are ongoing on the current cell.

A limited amount of SC-PTM control information is provided on the BCCH. This primarily concerns the information needed to acquire the SC-MCCH.

5.8a.1.2 SC-MCCH scheduling

The SC-MCCH information (i.e. information transmitted in messages sent over SC-MCCH) is transmitted periodically, using a configurable repetition period. SC-MCCH transmissions (and the associated radio resources and MCS) are indicated on PDCCH.

5.8a.1.3 SC-MCCH information validity and notification of changes

Change of SC-MCCH information only occurs at specific radio frames, i.e. the concept of a modification period is used. Within a modification period, the same SC-MCCH information may be transmitted a number of times, as defined by its scheduling (which is based on a repetition period). The modification period boundaries are defined by SFN values for which SFN mod m= 0, where m is the number of radio frames comprising the modification period. The modification period is configured by means of *SystemInformationBlockType20*.

When the network changes (some of) the SC-MCCH information, it notifies the UEs about the change in the first subframe which can be used for SC-MCCH transmission in a repetition period. LSB bit in 8-bit bitmap when set to '1' indicates the change in SC-MCCH. Upon receiving a change notification, a UE interested to receive MBMS services transmitted using SC-PTM acquires the new SC-MCCH information starting from the same subframe. The UE applies the previously acquired SC-MCCH information until the UE acquires the new SC-MCCH information.

5.8a.1.4 Procedures

The SC-PTM capable UE receiving or interested to receive MBMS service(s) via SC-MRB applies SC-PTM procedures described in 5.8a and the MBMS interest indication procedure as specified in 5.8.5.

DAINGEAN_0001981

5.8a.2 SC-MCCH information acquisition

5.8a.2.1 General

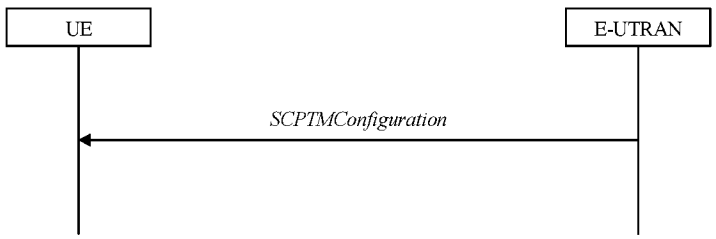


Figure 5.8a.2.1-1: SC-MCCH information acquisition

The UE applies the SC-MCCH information acquisition procedure to acquire the SC-PTM control information that is broadcast by the E-UTRAN. The procedure applies to SC-PTM capable UEs that are in RRC_IDLE or in RRC_CONNECTED.

5.8a.2.2 Initiation

A UE interested to receive MBMS services via SC-MRB shall apply the SC-MCCH information acquisition procedure upon entering the cell broadcasting *SystemInformationBlockType20* (e.g. upon power on, following UE mobility) and upon receiving a notification that the SC-MCCH information has changed. A UE that is receiving an MBMS service via SC-MRB shall apply the SC-MCCH information acquisition procedure to acquire the SC-MCCH information that corresponds with the service that is being received, at the start of each modification period.

Unless explicitly stated otherwise in the procedural specification, the SC-MCCH information acquisition procedure overwrites any stored SC-MCCH information, i.e. delta configuration is not applicable for SC-MCCH information and the UE discontinues using a field if it is absent in SC-MCCH information unless explicitly specified otherwise.

5.8a.2.3 SC-MCCH information acquisition by the UE

A SC-PTM capable UE shall:

1> if the procedure is triggered by an SC-MCCH information change notification:

2> start acquiring the *SCPTMConfiguration* message from the subframe where the change notification was received;

NOTE 1: The UE continues using the previously received SC-MCCH information until the new SC-MCCH information has been acquired.

1> if the UE enters a cell broadcasting *SystemInformationBlockType20*:

2> acquire the *SCPTMConfiguration* message at the next repetition period;

1> if the UE is receiving an MBMS service via an SC-MRB:

2> start acquiring the *SCPTMConfiguration* message from the beginning of each modification period.

5.8a.2.4 Actions upon reception of the *SCPTMConfiguration* message

No UE requirements related to the contents of this *SCPTMConfiguration* apply other than those specified elsewhere e.g. within procedures using the concerned system information, the corresponding field descriptions.

DAINGEAN_0001982

5.8a.3 SC-PTM radio bearer configuration

5.8a.3.1 General

The SC-PTM radio bearer configuration procedure is used by the UE to configure RLC, MAC and the physical layer upon starting and/or stopping to receive an SC-MRB transmitted on SC-MTCH. The procedure applies to SC-PTM capable UEs that are in RRC_CONNECTED or in RRC_IDLE and are interested to receive one or more MBMS services via SC-MRB.

NOTE: In case the UE is unable to receive an MBMS service via an SC-MRB due to capability limitations, upper layers may take appropriate action e.g. terminate a lower priority unicast service.

5.8a.3.2 Initiation

The UE applies the SC-MRB establishment procedure to start receiving a session of a MBMS service it has an interest in. The procedure may be initiated e.g. upon start of the MBMS session, upon entering a cell providing via SC-MRB a MBMS service in which the UE has interest, upon becoming interested in the MBMS service, upon removal of UE capability limitations inhibiting reception of the concerned service.

The UE applies the SC-MRB release procedure to stop receiving a session. The procedure may be initiated e.g. upon stop of the MBMS session, upon leaving the cell where a SC-MRB is established, upon losing interest in the MBMS service, when capability limitations start inhibiting reception of the concerned service.

5.8a.3.3 SC-MRB establishment

Upon SC-MRB establishment, the UE shall:

1> establish an RLC entity in accordance with the configuration specified in 9.1.1.7;

1> configure a SC-MTCH logical channel applicable for the SC-MRB and instruct MAC to receive DL-SCH on the cell where the *SCPTMConfiguration* message was received for the MBMS service for which the SC-MRB is established and using *g-RNTI* and *sc-mtch-SchedulingInfo* (if included) in this message for this MBMS service:

1> configure the physical layer in accordance with the *sc-mtch-InfoList*, applicable for the SC-MRB, as included in the *SCPTMConfiguration* message;

1> inform upper layers about the establishment of the SC-MRB by indicating the corresponding *tmgi* and *sessionId*;

5.8a.3.4 SC-MRB release

Upon SC-MRB release, the UE shall:

1> release the RLC entity as well as the related MAC and physical layer configuration;

1> inform upper layers about the release of the SC-MRB by indicating the corresponding *tmgi* and *sessionId*;

DAINGEAN_0001983

5.9 RN procedures

5.9.1 RN reconfiguration

5.9.1.1 General

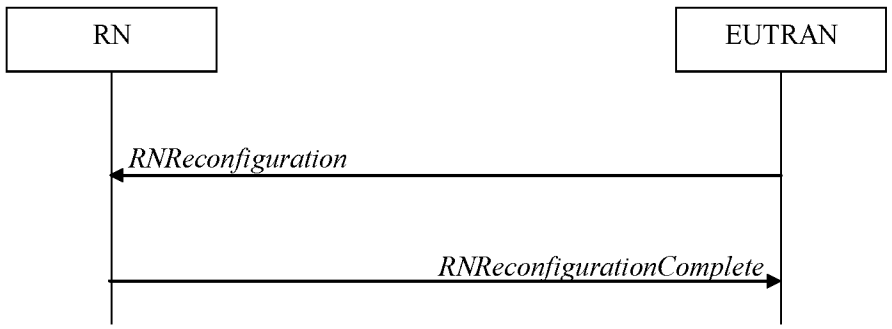


Figure 5.9.1.1-1: RN reconfiguration

The purpose of this procedure is to configure/reconfigure the RN subframe configuration and/or to update the system information relevant for the RN in RRC_CONNECTED.

5.9.1.2 Initiation

E-UTRAN may initiate the RN reconfiguration procedure to an RN in RRC_CONNECTED when AS security has been activated.

5.9.1.3 Reception of the *RNReconfiguration* by the RN

The RN shall:

1> if the *rn-SystemInfo* is included:

2> if the *systemInformationBlockType1* is included:

3> act upon the received *SystemInformationBlockType1* as specified in 5.2.2.7;

2> if the *SystemInformationBlockType2* is included:

3> act upon the received *SystemInformationBlockType2* as specified in 5.2.2.9;

1> if the *rn-SubframeConfig* is included:

2> reconfigure lower layers in accordance with the received *subframeConfigPatternFDD* or *subframeConfigPatternTDD*;

2> if the *rpdcch-Config* is included:

3> reconfigure lower layers in accordance with the received *rpdcch-Config*;

1> submit the *RNReconfigurationComplete* message to lower layers for transmission, upon which the procedure ends;

5.10 Sidelink

5.10.1 Introduction

The sidelink communication and associated synchronisation resource configuration applies for the frequency at which it was received/ acquired. Moreover, for a UE configured with one or more SCells, the sidelink communication and

DAINGEAN_0001984

associated synchronisation resource configuration provided by dedicated signalling applies for the PCell/ the primary frequency. The sidelink discovery and associated synchronisation resource configuration applies for the frequency at which it was received/ acquired or the indicated frequency in the configuration. For a UE configured with one or more SCells, the sidelink discovery and associated synchronisation resource configuration provided by dedicated signalling applies for the the PCell/ the primary frequency / any other indicated frequency.

NOTE 1: Upper layers configure the UE to receive or transmit sidelink communication on a specific frequency, to monitor or transmit non-PS related sidelink discovery announcements on one or more frequencies or to monitor or transmit PS related sidelink discovery announcements on a specific frequency, but only if the UE is authorised to perform these particular ProSe related sidelink activities.

NOTE 2: It is up to UE implementation which actions to take (e.g. termination of unicast services, detach) when it is unable to perform the desired sidelink activities, e.g. due to UE capability limitations.

Sidelink communication consists of one-to-many and one-to-one sidelink communication. One-to-many sidelink communication consists of relay related and non-relay related one-to-many sidelink communication. One-to-one sidelink communication consists of relay related and non-relay related one-to-one sidelink communication. In relay related one-to-one sidelink communication the communicating parties consist of one sidelink relay UE and one sidelink remote UE.

Sidelink discovery consists of public safety related (PS related) and non-PS related sidelink discovery. PS related sidelink discovery consists of relay related and non-relay related PS related sidelink discovery. Upper layers indicate to RRC whether a particular sidelink announcement is PS related or non-PS related.

The specification covers the use of UE to network sidelink relays by specifying the additional requirements that apply for a sidelink relay UE and a sidelink remote UE. I.e. for such UEs the regular sidelink UE requirements equally apply unless explicitly stated otherwise.

5.10.1a Conditions for sidelink communication operation

When it is specified that the UE shall perform sidelink communication operation only if the conditions defined in this section are met, the UE shall perform sidelink communication operation only if:

1> if the UE's serving cell is suitable (RRC_IDLE or RRC_CONNECTED); and if either the selected cell on the frequency used for sidelink communication operation belongs to the registered or equivalent PLMN as specified in TS 24.334 [69] or the UE is out of coverage on the frequency used for sidelink communication operation as defined in TS 36.304 [4, 11.4]; or

1> if the UE is camped on a serving cell (RRC_IDLE) on which it fulfils the conditions to support sidelink communication in limited service state as specified in TS 23.303 [68, 4.5.6]; and if either the serving cell is on the frequency used for sidelink communication operation or the UE is out of coverage on the frequency used for sidelink communication operation as defined in TS 36.304 [4, 11.4]; or

1> if the UE has no serving cell (RRC_IDLE);

5.10.1b Conditions for PS related sidelink discovery operation

When it is specified that the UE shall perform PS related sidelink discovery operation only if the conditions defined in this section are met, the UE shall perform PS related sidelink discovery operation only if:

1> if the UE's serving cell is suitable (RRC_IDLE or RRC_CONNECTED); and if either the selected cell on the frequency used for PS related sidelink discovery operation belongs to the registered or other PLMN as specified in TS 24.334 [69] or the UE is out of coverage on the frequency used for PS related sidelink discovery operation as defined in TS 36.304 [4, 11.4]; or

1> if the UE is camped on a serving cell (RRC_IDLE) on which it fulfils the conditions to support sidelink discovery in limited service state as specified in TS 23.303 [68, 4.5.6]; and if either the serving cell is on the frequency used for PS related sidelink discovery operation or the UE is out of coverage on the frequency used for PS related sidelink discovery operation as defined in TS 36.304 [4, 11.4]; or

1> if the UE has no serving cell (RRC_IDLE);

DAINGEAN_0001985

5.10.1c Conditions for non-PS related sidelink discovery operation

When it is specified that the UE shall perform non-PS related sidelink discovery operation only if the conditions defined in this section are met, the UE shall perform non-PS related sidelink discovery operation only if:

1> if the UE's serving cell (RRC_IDLE) or PCell (RRC_CONNECTED) is suitable; and if the selected cell on the frequency used for non-PS related sidelink discovery operation belongs to the registered or other PLMN as specified in TS 24.334 [69].

5.10.2 Sidelink UE information

5.10.2.1 General

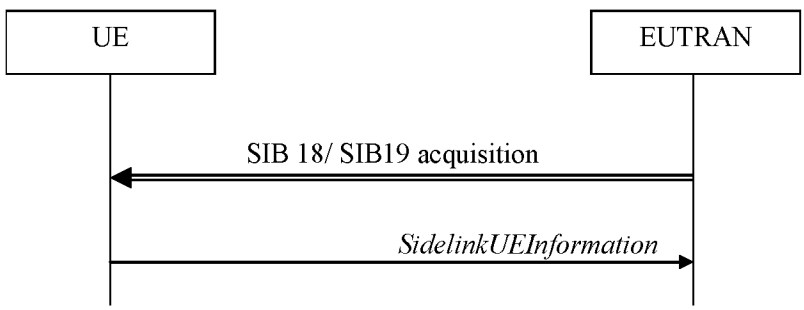


Figure 5.10.2-1: Sidelink UE information

The purpose of this procedure is to inform E-UTRAN that the UE is interested or no longer interested to receive sidelink communication or discovery, as well as to request assignment or release of transmission resources for sidelink communication or discovery announcements or sidelink discovery gaps and to report parameters related to sidelink discovery from system information of inter-frequency/PLMN cells.

DAINGEAN_0001986

5.10.2.2 Initiation

A UE capable of sidelink communication or discovery that is in RRC_CONNECTED may initiate the procedure to indicate it is (interested in) receiving sidelink communication or discovery in several cases including upon successful connection establishment, upon change of interest, upon change to a PCell broadcasting *SystemInformationBlockType18* or *SystemInformationBlockType19*. A UE capable of sidelink communication or discovery may initiate the procedure to request assignment of dedicated resources for the concerned sidelink communication transmission or discovery announcements or to request sidelink discovery gaps for sidelink discovery transmission or sidelink discovery reception and a UE capable of inter-frequency/PLMN sidelink discovery parameter reporting may initiate the procedure to report parameters related to sidelink discovery from system information of inter-frequency/PLMN cells.

NOTE 1: A UE in RRC_IDLE that is configured to transmit sidelink communication/ discovery announcements, while *SystemInformationBlockType18*/ *SystemInformationBlockType19* does not include the resources for transmission (in normal conditions), initiates connection establishment in accordance with 5.3.3.1a.

Upon initiating the procedure, the UE shall:

1> if *SystemInformationBlockType18* is broadcast by the PCell:

2> ensure having a valid version of *SystemInformationBlockType18* for the PCell;

2> if configured by upper layers to receive sidelink communication:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType18*; or

NOTE 2: After handover/ re-establishment from a source PCell not broadcasting *SystemInformationBlockType18* the UE repeats the same interest information that it provided previously as such a source PCell may not forward the interest information.

3> if the last transmission of the *SidelinkUEInformation* message did not include *commRxInterestedFreq*; or if the frequency configured by upper layers to receive sidelink communication on has changed since the last transmission of the *SidelinkUEInformation* message:

4> initiate transmission of the *SidelinkUEInformation* message to indicate the sidelink communication reception frequency of interest in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *commRxInterestedFreq*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it is no longer interested in sidelink communication reception in accordance with 5.10.2.3;

2> if configured by upper layers to transmit non-relay related one-to-many sidelink communication:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType18*; or

3> if the last transmission of the *SidelinkUEInformation* message did not include *commTxResourceReq*; or if the information carried by the *commTxResourceReq* has changed since the last transmission of the *SidelinkUEInformation* message:

4> initiate transmission of the *SidelinkUEInformation* message to indicate the non-relay related one-to-many sidelink communication transmission resources required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *commTxResourceReq*:

DAINGEAN_0001987

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires non-relay related one-to-many sidelink communication transmission resources in accordance with 5.10.2.3;

2> if configured by upper layer to transmit relay related one-to-many sidelink communication:

3> if the UE did not transmit a *SidelinkUEInformation* message since entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType18*, connected to a PCell not broadcasting *SystemInformationBlockType19* or broadcasting *SystemInformationBlockType19* not including *discConfigRelay*; or

3> if the last transmission of *SidelinkUEInformation* message did not include *commTxResourceReqRelay*; or if the information carried by the *commTxResourceReqRelay* has changed since the last transmission of the *SidelinkUEInformation* message:

4> if the UE is acting as sidelink relay UE:

5> initiate transmission of the *SidelinkUEInformation* message to indicate the relay related one-to-many sidelink communication transmission resources required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *commTxResourceReqRelay*:

4> initiate transmission of the S*idelinkUEInformation* message to indicate it no longer requires relay related one-to-many sidelink communication transmission resources in accordance with 5.10.2.3;

2> if configured by upper layers to transmit non-relay related one-to-one sidelink communication:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType18* or connected to a PCell broadcasting *SystemInformationBlockType18* not including *commTxResourceUC-ReqAllowed*; or

3> if the last transmission of the *SidelinkUEInformation* message did not include *commTxResourceReqUC*; or if the information carried by the *commTxResourceReqUC* has changed since the last transmission of the *SidelinkUEInformation* message:

4> if *commTxResourceUC-ReqAllowed* is included in *SystemInformationBlockType18*:

5> initiate transmission of the *SidelinkUEInformation* message to indicate the non-relay related one-to-one sidelink communication transmission resources required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *commTxResourceReqUC*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires non-relay related one-to-one sidelink communication transmission resources in accordance with 5.10.2.3;

2> if configured by upper layers to transmit relay related one-to-one sidelink communication:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType18*, connected to a PCell not broadcasting *SystemInformationBlockType19* or broadcasting *SystemInformationBlockType19* not including *discConfigRelay*; or

DAINGEAN_0001988

3> if the last transmission of the *SidelinkUEInformation* message did not include *commTxResourceReqRelayUC*; or if the information carried by the *commTxResourceReqRelayUC* has changed since the last transmission of the *SidelinkUEInformation* message:

4> if the UE is acting as sidelink relay UE; or:

4> if the UE has a selected sidelink relay UE; and if *SystemInformationBlockType19* is broadcast by the PCell and includes *discConfigRelay*; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met;

5> initiate transmission of the *SidelinkUEInformation* message to indicate the relay related one-to-one sidelink communication transmission resources required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *commTxResourceReqRelayUC*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires relay related one-to-one sidelink communication transmission resources in accordance with 5.10.2.3;

1> if *SystemInformationBlockType19* is broadcast by the PCell:

2> ensure having a valid version of *SystemInformationBlockType19* for the PCell;

2> if configured by upper layers to receive sidelink discovery announcements on a serving frequency or on one or more frequencies included in *discInterFreqList*, if included in *SystemInformationBlockType19* of the PCell:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType19*; or

3> if the last transmission of the *SidelinkUEInformation* message did not include *discRxInterest*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it is interested in sidelink discovery reception in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *discRxInterest*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it is no longer interested in sidelink discovery reception in accordance with 5.10.2.3;

2> if the UE is configured by upper layers to transmit non-PS related sidelink discovery announcements on the primary frequency or on one or more frequencies included in *discInterFreqList*, if included in *SystemInformationBlockType19* of the PCell, with *discTxResourcesInterFreq* included within *discResourcesNonPS* and not set to *noTxOnCarrier*:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType19* or connected to a PCell broadcasting *SystemInformationBlockType19* not including *discTxResourcesInterFreq* within *discResourcesNonPS* or *discTxResourcesInterFreq* did not include all frequencies for which the UE will request resources; or

3> if the last transmission of the *SidelinkUEInformation* message did not include *discTxResourceReq*; or if the non-PS related sidelink discovery announcement resources required by the UE have changed (i.e. resulting in a change of *discTxResourceReq*) since the last transmission of the *SidelinkUEInformation* message:

4> initiate transmission of the *SidelinkUEInformation* message to indicate the non-PS related sidelink discovery announcement resources required by the UE in accordance with 5.10.2.3;

DAINGEAN_0001989

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *discTxResourceReq*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires non-PS related sidelink discovery announcement resources in accordance with 5.10.2.3;

2> if configured by upper layers to transmit PS related sidelink discovery announcements on the primary frequency or, in case of non-relay PS related sidelink discovery announcements, on a frequency included in *discInterFreqList*, if included in *SystemInformationBlockType19*, with *discTxResourcesInterFreq* included within *discResourcesPS* and not set to *noTxOnCarrier*:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType19*, connected to a PCell broadcasting *SystemInformationBlockType19* not including *discConfigPS*, or in case of non-relay PS related transmission: (connected to a PCell broadcasting *SystemInformationBlockType19* not including *discTxResourcesInterFreq* within *discResourcesPS* or for which *discTxResourcesInterFreq* did not include all frequencies for which the UE will request resources), or in case of relay related PS sidelink discovery announcements: (connected to a PCell broadcasting *SystemInformationBlockType19* not including *discConfigRelay*) sidelink; or

3> if the last transmission of the *SidelinkUEInformation* message did not include *discTxResourceReqPS*; or if the PS related sidelink discovery announcement resources required by the UE have changed (i.e. resulting in a change of *discTxResourceReqPS*) since the last transmission of the *SidelinkUEInformation* message:

4> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements; or

4> if the UE is acting as sidelink relay UE; and if *SystemInformationBlockType19* includes *discConfigRelay*; and if the sidelink relay UE threshold conditions as specified in 5.10.10.4 are met; or

4> if the UE is selecting a sidelink relay UE / has a selected sidelink relay UE; and if *SystemInformationBlockType19* includes *discConfigRelay*; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met:

5> initiate transmission of the *SidelinkUEInformation* message to indicate the PS related sidelink discovery announcement resources required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *discTxResourceReqPS*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires PS related sidelink discovery announcement resources in accordance with 5.10.2.3;

2> if configured by upper layers to monitor or transmit sidelink discovery announcements; and if the UE requires sidelink discovery gaps, to perform such actions:

3> if the UE did not transmit a *SidelinkUEInformation* message since last entering RRC_CONNECTED state; or

3> if since the last time the UE transmitted a *SidelinkUEInformation* message the UE connected to a PCell not broadcasting *SystemInformationBlockType19* or connected to a PCell broadcasting *SystemInformationBlockType19* not including *gapRequestsAllowedCommon* while at the same time the UE was not configured with *gapRequestsAllowedDedicated*; or

3> if the last transmission of the *SidelinkUEInformation* message did not include the gaps required to monitor or transmit the sidelink discovery announcements (i.e. UE requiring gaps to monitor discovery announcements while *discRxGapReq* was not included or UE requiring gaps to transmit discovery announcements while *discTxGapReq* was not included); or if the sidelink discovery gaps required by the UE have changed (i.e. resulting in a change of *discRxGapReq* or *discTxGapReq*) since the last transmission of the *SidelinkUEInformation* message:

4> if the UE is configured with *gapRequestsAllowedDedicated* set to *true*; or

DAINGEAN_0001990

4> if the UE is not configured with *gapRequestsAllowedDedicated* and *gapRequestsAllowedCommon* is included in *SystemInformationBlockType19*:

5> initiate transmission of the *SidelinkUEInformation* message to indicate the sidelink discovery gaps required by the UE in accordance with 5.10.2.3;

2> else:

3> if the last transmission of the *SidelinkUEInformation* message included *discTxGapReq* or *discRxGapReq*:

4> initiate transmission of the *SidelinkUEInformation* message to indicate it no longer requires sidelink discovery gaps in accordance with 5.10.2.3;

2> if the UE acquired the relevant parameters from the system information of one or more cells on a carrier included in the *discSysInfoToReportConfig* and T370 is running:

3> if the UE has configured lower layers to transmit or monitor the sidelink discovery announcements on those cells:

4> initiate transmission of the *SidelinkUEInformation* message to report the acquired system information parameters and stop T370;

5.10.2.3 Actions related to transmission of *SidelinkUEInformation* message

The UE shall set the contents of the *SidelinkUEInformation* message as follows:

1> if the UE initiates the procedure to indicate it is (no more) interested to receive sidelink communication or discovery or to request (configuration/ release) of sidelink communication or discovery transmission resources (i.e. UE includes all concerned information, irrespective of what triggered the procedure):

2> if *SystemInformationBlockType18* is broadcast by the PCell:

3> if configured by upper layers to receive sidelink communication:

4> include *commRxInterestedFreq* and set it to the sidelink communication frequency;

3> if configured by upper layers to transmit non-relay related one-to-many sidelink communication:

4> include *commTxResourceReq* and set its fields as follows:

5> set *carrierFreq* to indicate the sidelink communication frequency i.e. the same value as indicated in *commRxInterestedFreq* if included;

5> set *destinationInfoList* to include the non-relay related one-to-many sidelink communication transmission destination(s) for which it requests E-UTRAN to assign dedicated resources;

3> if configured by upper layers to transmit non-relay related one-to-one sidelink communication; and

3> if *commTxResourceUC-ReqAllowed* is included in *SystemInformationBlockType18*:

4> include *commTxResourceReqUC* and set its fields as follows:

5> set *carrierFreq* to indicate the one-to-one sidelink communication frequency i.e. the same value as indicated in *commRxInterestedFreq* if included;

5> set *destinationInfoList* to include the non-relay related one-to-one sidelink communication transmission destination(s) for which it requests E-UTRAN to assign dedicated resources;

3> if configured by upper layers to transmit relay related one-to-one sidelink communication; and

3> if *SystemInformationBlockType19* is broadcast by the PCell including *discConfigRelay*; and

3> if the UE is acting as sidelink relay UE; or if the UE has a selected sidelink relay UE; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met:

4> include *commTxResourceReqRelayUC* and set its fields as follows:

DAINGEAN_0001991

5> set *destinationInfoList* to include the one-to-one sidelink communication transmission destination(s) for which it requests E-UTRAN to assign dedicated resources;

4> include *ue-Type* and set it to *relayUE* if the UE is acting as sidelink relay UE and to *remoteUE* otherwise;

3> if configured by upper layers to transmit relay related one-to-many sidelink communication; and

3> if *SystemInformationBlockType19* is broadcast by the PCell including *discConfigRelay*; and

3> if the UE is acting as sidelink relay UE:

4> include *commTxResourceReqRelay* and set its fields as follows:

5> set *destinationInfoList* to include the one-to-many sidelink communication transmission destination(s) for which it requests E-UTRAN to assign dedicated resources;

4> include *ue-Type* and set it to *relayUE*;

2> if *SystemInformationBlockType19* is broadcast by the PCell:

3> if configured by upper layers to receive sidelink discovery announcements on a serving frequency or one or more frequencies included in *discInterFreqList*, if included in *SystemInformationBlockType19*:

4> include *discRxInterest*;

3> if the UE is configured by upper layers to transmit non-PS related sidelink discovery announcements:

4> for each frequency on which the UE is configured to transmit non-PS related sidelink discovery announcements that concerns the primary frequency or that is included in *discInterFreqList* with *discTxResourcesInterFreq* included within *discResourcesNonPS* and not set to *noTxOnCarrier*:

5> for the first frequency, include *discTxResourceReq* and set it to indicate the number of discovery messages for sidelink discovery announcement(s) for which it requests E-UTRAN to assign dedicated resources as well as the concerned frequency, if different from the primary;

5> for any additional frequency, include *discTxResourceReqAddFreq* and set it to indicate the number of discovery messages for sidelink discovery announcement(s) for which it requests E-UTRAN to assign dedicated resources as well as the concerned frequency;

3> if configured by upper layers to transmit PS related sidelink discovery announcements; and

3> if the frequency on which the UE is configured to transmit PS related sidelink discovery announcements either concerns the primary frequency or, in case of non-relay PS related sidelink discovery announcements, is included in *discInterFreqList* with *discTxResources InterFreq* included within *discResourcesPS* and not set to *noTxOnCarrier*:

4> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements and *SystemInformationBlockType19* includes *discConfigPS*; or

4> if the UE is acting as sidelink relay UE; and if *SystemInformationBlockType19* includes *discConfigRelay*; and if the sidelink relay UE threshold conditions as specified in 5.10.10.4 are met; or

4> if the UE is selecting a sidelink relay UE / has a selected sidelink relay UE; and if *SystemInformationBlockType19* includes *discConfigRelay*; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met:

5> include *discTxResourceReqPS* and set it to indicate the number of discovery messages for PS related sidelink discovery announcement(s) for which it requests E-UTRAN to assign dedicated resources as well as the concerned frequency, if different from the primary;

1> else if the UE initiates the procedure to request sidelink discovery transmission and/ or reception gaps:

2> if the UE is configured with *gapRequestsAllowedDedicated* set to *true*; or

2> if the UE is not configured with *gapRequestsAllowedDedicated* and *gapRequestsAllowedCommon* is included in *SystemInformationBlockType19*:

DAINGEAN_0001992

3> if the UE requires sidelink discovery gaps to monitor the sidelink discovery announcements the UE is configured to monitor by upper layers:

4> include *discRxGapReq* and set it to indicate, for each frequency that either concerns the primary frequency or is included in *discInterFreqList* on which the UE is configured to monitor sidelink discovery announcements and for which it requires sidelink discovery gaps to do so, the gap pattern(s) as well as the concerned frequency, if different from the primary;

3> if the UE requires sidelink discovery gaps to transmit the sidelink discovery announcements the UE is configured to transmit by upper layers:

4> include *discTxGapReq* and set it to indicate, for each frequency that either concerns the primary or is included in *discInterFreqList* on which the UE is configured to transmit sidelink discovery announcements and for which it requires sidelink discovery gaps to do so, the gap pattern(s) as well as the concerned frequency, if different from the primary;

1> else if the UE initiates the procedure to report the system information parameters related to sidelink discovery of carriers other than the primary:

2> include *discSysInfoReportFreqList* and set it to report the system information parameter acquired from the cells on those carriers;

The UE shall submit the *SidelinkUEInformation* message to lower layers for transmission.

5.10.3 Sidelink communication monitoring

A UE capable of sidelink communication that is configured by upper layers to receive sidelink communication shall:

1> if the conditions for sidelink communication operation as defined in 5.10.1a are met:

2> if in coverage on the frequency used for sidelink communication, as defined in TS 36.304 [4, 11.4]:

3> if the cell chosen for sidelink communication reception broadcasts *SystemInformationBlockType18* including *commRxPool*:

4> configure lower layers to monitor sidelink control information and the corresponding data using the pool of resources indicated by *commRxPool*;

NOTE 1: If *commRxPool* includes one or more entries including *rxParametersNCell*, the UE may only monitor such entries if the associated PSS/SSS or SLSSIDs is detected. When monitoring such pool(s), the UE applies the timing of the concerned PSS/SSS or SLSS.

2> else (i.e. out of coverage on the sidelink carrier):

3> configure lower layers to monitor sidelink control information and the corresponding data using the pool of resources that were preconfigured (i.e. *preconfigComm* in *SL-Preconfiguration* defined in 9.3);

NOTE 2: The UE may monitor in accordance with the timing of the selected SyncRef UE, or if the UE does not have a selected SyncRef UE, based on the UE's own timing.

DAINGEAN_0001993

5.10.4 Sidelink communication transmission

A UE capable of sidelink communication that is configured by upper layers to transmit non-relay related sidelink communication and has related data to be transmitted or a UE capable of relay related sidelink communication that is configured by upper layers to transmit relay related sidelink communications and satisfies the conditions for relay related sidelink communication specified in this section shall:

1> if the conditions for sidelink communication operation as defined in 5.10.1a are met:

2> if in coverage on the frequency used for sidelink communication, as defined in TS 36.304 [4, 11.4]:

3> if the UE is in RRC_CONNECTED and uses the PCell for sidelink communication:

4> if the UE is configured, by the current PCell/ the PCell in which physical layer problems or radio link failure was detected, with *commTxResources* set to *scheduled*:

5> if T310 or T311 is running; and if the PCell at which the UE detected physical layer problems or radio link failure broadcasts *SystemInformationBlockType18* including *commTxPoolExceptional*; or

5> if T301 is running and the cell on which the UE initiated connection re-establishment broadcasts *SystemInformationBlockType18* including *commTxPoolExceptional*:

6> configure lower layers to transmit the sidelink control information and the corresponding data using the pool of resources indicated by the first entry in *commTxPoolExceptional*;

5> else:

6> configure lower layers to request E-UTRAN to assign transmission resources for sidelink communication;

4> else if the UE is configured with *commTxPoolNormalDedicated* or *commTxPoolNormalDedicatedExt*:

5> if *priorityList* is included for the entries of *commTxPoolNormalDedicated* or *commTxPoolNormalDedicatedExt*:

6> configure lower layers to transmit the sidelink control information and the corresponding data using the one or more pools of resources indicated by *commTxPoolNormalDedicated* or *commTxPoolNormalDedicatedExt* i.e. indicate all entries of this field to lower layers;

5> else:

6> configure lower layers to transmit the sidelink control information and the corresponding data using the pool of resources indicated by the first entry in *commTxPoolNormalDedicated*;

3> else (i.e. sidelink communication in RRC_IDLE or on cell other than PCell in RRC_CONNECTED):

4> if the cell chosen for sidelink communication transmission broadcasts *SystemInformationBlockType18*:

5> if *SystemInformationBlockType18* includes *commTxPoolNormalCommon*:

6> if *priorityList* is included for the entries of *commTxPoolNormalCommon* or *commTxPoolNormalCommonExt*:

7> configure lower layers to transmit the sidelink control information and the corresponding data using the one or more pools of resources indicated by *commTxPoolNormalCommon* and/or *commTxPoolNormalCommonExt* i.e. indicate all entries of these fields to lower layers;

6> else:

7> configure lower layers to transmit the sidelink control information and the corresponding data using the pool of resources indicated by the first entry in *commTxPoolNormalCommon*;

DAINGEAN_0001994

5> else if *SystemInformationBlockType18* includes *commTxPoolExceptional*:

6> from the moment the UE initiates connection establishment until receiving an *RRCConnectionReconfiguration* including *sl-CommConfig* or until receiving an *RRCConnectionRelease* or an *RRCConnectionReject*;

7> configure lower layers to transmit the sidelink control information and the corresponding data using the pool of resources indicated by the first entry in *commTxPoolExceptional*;

2> else (i.e. out of coverage on sidelink carrier):

3> if *priorityList* is included for the entries of *preconfigComm* in *SL-Preconfiguration* defined in 9.3:

4> configure lower layers to transmit the sidelink control information and the corresponding data using the one or more pools of resources indicated *preconfigComm* i.e. indicate all entries of this field to lower layers and in accordance with the timing of the selected SyncRef UE, or if the UE does not have a selected SyncRef UE, based on the UEs own timing;

3> else:

4> configure lower layers to transmit the sidelink control information and the corresponding data using the pool of resources that were preconfigured i.e. indicated by the first entry in *preconfigComm* in *SL-Preconfiguration* defined in 9.3 and in accordance with the timing of the selected SyncRef UE, or if the UE does not have a selected SyncRef UE, based on the UEs own timing;

The conditions for relay related sidelink communication are as follows:

1> if the transmission concerns sidelink relay communication; and the UE is capable of sidelink relay or sidelink remote operation:

2> if the UE is in RRC_IDLE; and if the UE has a selected sidelink relay UE: configure lower layers to transmit the sidelink control information and the corresponding data using the resources, as specified previously in this section, only if the following condition is met:

3> if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met; and if the UE configured lower layers with a pool of resources included in *SystemInformationBlockType18* (i.e. *commTxPoolNormalCommon*, *commTxPoolNormalCommonExt* or *commTxPoolExceptional*); and *commTxAllowRelayCommon* is included in *SystemInformationBlockType18*;

2> if the UE is in RRC_CONNECTED: configure lower layers to transmit the sidelink control information and the corresponding data using the resources, as specified previously in this section, only if the following condition is met:

3> if the UE configured lower layers with resources provided by dedicated signalling (i.e. *commTxResources*); and the UE is configured with *commTxAllowRelayDedicated* set to *true*;

5.10.5 Sidelink discovery monitoring

A UE capable of non-PS related sidelink discovery that is configured by upper layers to monitor non-PS related sidelink discovery announcements shall:

1> for each frequency the UE is configured to monitor non-PS related sidelink discovery announcements on, prioritising the frequencies included in *discInterFreqList*, if included in *SystemInformationBlockType19*:

2> if the PCell or the cell the UE is camping on indicates the pool of resources to monitor sidelink discovery announcements on by *discRxResourcesInterFreq* in *discResourcesNonPS* within *discInterFreqList* in *SystemInformationBlockType19*:

3> configure lower layers to monitor sidelink discovery announcements using the pool of resources indicated by *discRxResourcesInterFreq*in *discResourcesNonPS* within *SystemInformationBlockType19*;

2> else if the cell used for sidelink discovery monitoring broadcasts *SystemInformationBlockType19*:

DAINGEAN_0001995

3> configure lower layers to monitor sidelink discovery announcements using the pool of resources indicated by *discRxPool* in *SystemInformationBlockType19*;

2> if the UE is configured with *discRxGapConfig* and requires sidelink discovery gaps to monitor sidelink discovery announcements on the concerned frequency;

3> configure lower layers to monitor the concerned frequency using the sidelink discovery gaps indicated by *discRxGapConfig*;

2> else:

3> configure lower layers to monitor the concerned frequency without affecting normal operation;

A UE capable of PS related sidelink discovery that is configured by upper layers to monitor PS related sidelink discovery announcements shall:

1> if out of coverage on the frequency, as defined in TS 36.304 [4, 11.4]:

2> configure lower layers to monitor sidelink discovery announcements using the pool of resources that were preconfigured (i.e. indicated by *discRxPoolList* within *preconfigDisc* in *SL-Preconfiguration* defined in 9.3);

1> else if configured by upper layers to monitor non-relay PS related discovery announcements; and if the PCell or the cell the UE is camping on indicates a pool of resources to monitor sidelink discovery announcements on by *discRxResourcesInterFreq* in *discResourcesPS* within *discInterFreqList* in *SystemInformationBlockType19*:

2> configure lower layers to monitor sidelink discovery announcements using the pool of resources indicated by *discRxResourcesInterFreq* in *discResourcesPS* in *SystemInformationBlockType19*;

1> else if configured by upper layers to monitor PS related sidelink discovery announcements; and if the cell used for sidelink discovery monitoring broadcasts *SystemInformationBlockType19*:

2> configure lower layers to monitor sidelink discovery announcements using the pool of resources indicated by *discRxPoolPS* in *SystemInformationBlockType19*;

1> if the UE is configured with *discRxGapConfig* and requires sidelink discovery gaps to monitor sidelink discovery announcements on the concerned frequency;

2> configure lower layers to monitor the concerned frequency using the sidelink discovery gaps indicated by *discRxGapConfig*;

1> else:

2> configure lower layers to monitor the concerned frequency without affecting normal operation;

NOTE 1: The requirement not to affect normal UE operation also applies for the acquisition of sidelink discovery related system and synchronisation information from inter-frequency cells.

NOTE 2: The UE is not required to monitor all pools simultaneously.

NOTE 3: It is up to UE implementation to decide whether a cell is sufficiently good to be used to monitor sidelink discovery announcements.

NOTE 4: If *discRxPool*, *discRxPoolPS* or *discRxResourcesInterFreq* includes one or more entries including *rxParameters*, the UE may only monitor such entries if the associated SLSSIDs are detected. When monitoring such pool(s) the UE applies the timing of the corresponding SLSS.

5.10.6 Sidelink discovery announcement

A UE capable of non-PS related sidelink discovery that is configured by upper layers to transmit non-PS related sidelink discovery announcements shall, for each frequency the UE is configured to transmit such announcements on:

NOTE: In case the configured resources are insufficient it is up to UE implementation to decide which sidelink discovery announcements to transmit.

1> if the frequency used to transmit sidelink discovery announcements concerns the serving frequency (RRC_IDLE) or primary frequency (RRC_CONNECTED):

DAINGEAN_0001996

2> if the UE's serving cell (RRC_IDLE) or PCell (RRC_CONNECTED) is suitable as defined in TS 36.304 [4]:

3> if the UE is in RRC_CONNECTED (i.e. PCell is used for sidelink discovery announcement):

4> if the UE is configured with *discTxResources* set to *scheduled*:

5> configure lower layers to transmit the sidelink discovery announcement using the assigned resources indicated by *scheduled* in *discTxResources*;

4> else if the UE is configured with *discTxPoolDedicated* (i.e. *discTxResources* set to *ue-Selected*):

5> select an entry of the list of resource pool entries in *discTxPoolDedicated* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

3> else if T300 is not running (i.e. UE in RRC_IDLE, announcing via serving cell):

4> if *SystemInformationBlockType19* of the serving cell includes *discTxPoolCommon*:

5> select an entry of the list of resource pool entries in *discTxPoolCommon* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> else if, for the frequency used to transmit sidelink discovery announcements on, the UE is configured with dedicated resources (i.e. with *discTxResources-r12*, if *discTxCarrierFreq* is included in *discTxInterFreqInfo*, or with *discTxResources* within *discTxInfoInterFreqListAdd* in *discTxInterFreqInfo*); and the conditions for non-PS related sidelink discovery operation as defined in 5.10.1c are met:

2> if the UE is configured with *discTxResources* set to *scheduled*:

3> configure lower layers to transmit the sidelink discovery announcement using the assigned resources indicated by *scheduled* in *discTxResources*;

2> else if the UE is configured with *discTxResources* set to *ue-Selected*:

3> select an entry of the list of resource pool entries in *ue-Selected* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> else if the frequency used to transmit sidelink discovery announcements on is included in *discInterFreqList* within *SystemInformationBlockType19* of the serving cell/ PCell, and *discTxResourcesInterFreq* within *discResourcesNonPS* in the corresponding entry of *discInterFreqList* is set to *discTxPoolCommon* (i.e. serving cell/ PCell broadcasts pool of resources) and the conditions for non-PS related sidelink discovery operation as defined in 5.10.1c are met; or

1> else if *discTxPoolCommon* is included in *SystemInformationBlockType19* acquired from cell selected on the sidelink discovery announcement frequency; and the conditions for non-PS related sidelink discovery operation as defined in 5.10.1c are met:

2> select an entry of the list of resource pool entries in *discTxPoolCommon* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> if the UE is configured with *discTxGapConfig* and requires sidelink discovery gaps to transmit sidelink discovery announcements on the concerned frequency;

2> configure lower layers to transmit on the concerned frequency using the sidelink discovery gaps indicated by *discTxGapConfig*,

1> else:

2> configure lower layers to transmit on the concerned frequency without affecting normal operation;

A UE capable of PS related sidelink discovery that is configured by upper layers to transmit PS related sidelink discovery announcements shall:

1> if out of coverage on the frequency used to transmit PS related sidelink discovery announcements as defined in TS 36.304 [4, 11.4] and the conditions for PS -related sidelink discovery operation as defined in 5.10.1b are met:

2> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements; or

DAINGEAN_0001997

2> if the UE is selecting a sidelink relay UE/ has a selected sidelink relay UE:

3> configure lower layers to transmit sidelink discovery announcements using the pool of resources that were preconfigured and in accordance with the following;

4> randomly select, using a uniform distribution, an entry of *preconfigDisc* in *SL-Preconfiguration* defined in 9.3;

4> using the timing of the selected SyncRef UE, or if the UE does not have a selected SyncRef UE, based on the UEs own timing;

1> else if the frequency used to transmit sidelink discovery announcements concerns the serving frequency (RRC_IDLE) or primary frequency (RRC_CONNECTED) and the conditions for PS related sidelink discovery operation as defined in 5.10.1b are met:

2> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements; or

2> if the UE is acting as sidelink relay UE; and if the UE is in RRC_IDLE; and if the sidelink relay UE threshold conditions as specified in 5.10.10.4 are met; or

2> if the UE is acting as sidelink relay UE; and if the UE is in RRC_CONNECTED; or

2> if the UE is selecting a sidelink relay UE / has a selected sidelink relay UE; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met:

3> if the UE is configured with *discTxPoolPS-Dedicated*; or

3> if the UE is in RRC_IDLE; and if *discTxPoolPS-Common* is included in *SystemInformationBlockType19*:

4> select an entry of the list of resource pool entries and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

3> else if the UE is configured with *discTxResourcesPS* set to *scheduled*:

4> configure lower layers to transmit the sidelink discovery announcement using the assigned resources indicated by *scheduled* in *discTxResourcesPS*;

1> else if, for the frequency used to transmit sidelink discovery announcements on, the UE is configured with dedicated resources (i.e. with *discTxResourcesPS* in *discTxInterFreqInfo* within *sl-DiscConfig*); and the conditions for PS related sidelink discovery operation as defined in 5.10.1b are met:

2> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements:

3> if the UE is configured with *discTxResourcesPS* set to *scheduled*:

4> configure lower layers to transmit the sidelink discovery announcement using the assigned resources indicated by *scheduled* in *discTxResourcesPS*;

3> else if the UE is configured with *discTxResourcesPS* set to *ue-Selected*:

4> select an entry of the list of resource pool entries in *ue-Selected* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> else if the frequency used to transmit sidelink discovery announcements on is included in *discInterFreqList* within *SystemInformationBlockType19* of the serving cell/ PCell, while *discTxResourcesInterFreq* within *discResourcesPS* in the corresponding entry of *discInterFreqList* is set to *discTxPoolCommon* (i.e. serving cell/ PCell broadcasts pool of resources) and the conditions for PS related sidelink discovery operation as defined in 5.10.1b are met:

2> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements:

3> select an entry of the list of resource pool entries in *discTxPoolCommon* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> else if *discTxPoolPS-Common* is included in *SystemInformationBlockType19* acquired from cell selected on the sidelink discovery announcement frequency; and the conditions for PS related sidelink discovery operation as defined in 5.10.1b are met:

DAINGEAN_0001998

2> if configured by upper layers to transmit non-relay PS related sidelink discovery announcements:

3> select an entry of the list of resource pool entries in *discTxPoolPS-Common* and configure lower layers to use it to transmit the sidelink discovery announcements as specified in 5.10.6a;

1> if the UE is configured with *discTxGapConfig* and requires gaps to transmit sidelink discovery announcements on the concerned frequency;

2> configure lower layers to transmit on the concerned frequency using the gaps indicated by *discTxGapConfig*,

1> else:

2> configure lower layers to transmit on the concerned frequency without affecting normal operation;

5.10.6a Sidelink discovery announcement pool selection

A UE that is configured with a list of resource pool entries for sidelink discovery announcement transmission (i.e. by *SL-DiscTxPoolList*) shall:

1> if *poolSelection* is set to *rsrpBased*:

2> select a pool from the list of pools the UE is configured with for which the RSRP measurement of the reference cell selected as defined in 5.10.6b, after applying the layer 3 filter defined by *quantityConfig* as specified in 5.5.3.2 , is in-between *threshLow* and *threshHigh*;

1> else:

2> randomly select, using a uniform distribution, a pool from the list of pools the UE is configured with;

1> configure lower layers to transmit the sidelink discovery announcement using the selected pool of resources;

NOTE 1: When performing resource pool selection based on RSRP, the UE uses the latest results of the available measurements used for cell reselection evaluation in RRC_IDLE/ for measurement report triggering evaluation in RRC_CONNECTED, which are performed in accordance with the performance requirements specified in TS 36.133 [16].

5.10.6b Sidelink discovery announcement reference carrier selection

A UE capable of sidelink discovery that is configured by upper layers to transmit sidelink discovery announcements shall:

1> for each frequency the UE is transmitting sidelink discovery announcements on, select a cell to be used as reference for synchronisation and DL measurements in accordance with the following:

2> if the frequency concerns the primary frequency:

3> use the PCell as reference;

2> else if the frequency concerns a secondary frequency:

3> use the concerned SCell as reference;

2> else if the UE is configured with *discTxRefCarrierDedicated* for the frequency:

3> use the cell indicated by this field as reference;

2> else if the UE is configured with *refCarrierCommon* for the frequency:

3> use the serving cell (RRC_IDLE)/ PCell (RRC_CONNECTED) as reference;

2> else:

3> use the DL frequency paired with the one used to transmit sidelink discovery announcements on as reference;

DAINGEAN_0001999

5.10.7 Sidelink synchronisation information transmission

5.10.7.1 General

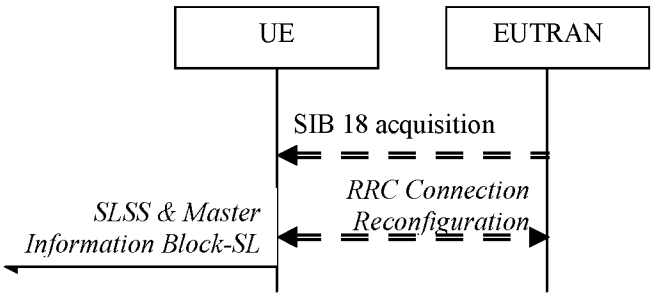


Figure 5.10.7.1-1: Synchronisation information transmission for sidelink communication, in (partial) coverage

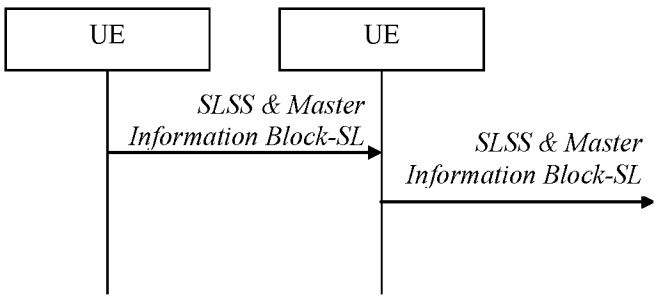


Figure 5.10.7.1-2: Synchronisation information transmission for sidelink communication/ discovery, out of coverage

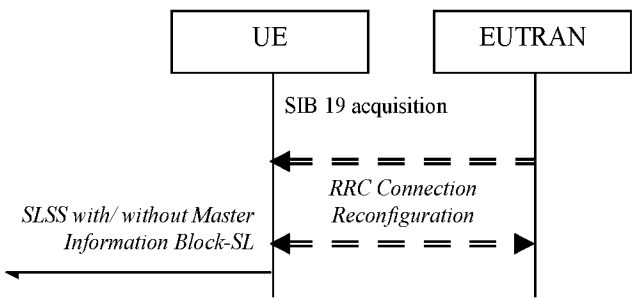


Figure 5.10.7.1-3: Synchronisation information transmission for sidelink discovery, in (partial) coverage

The purpose of this procedure is to provide synchronisation information to a UE. For sidelink discovery, the synchronisation information concerns a Sidelink Synchronisation Signal (SLSS) and, in case of PS related discovery, also timing information and some additional configuration parameters (i.e. the *MasterInformationBlock-SL* message), while for sidelink communication it concerns an SLSS and the *MasterInformationBlock-SL* message. A UE transmits synchronisation information either when E-UTRAN configures it to do so by dedicated signalling (i.e. network based), or when not configured by dedicated signalling (i.e. UE based) and E-UTRAN broadcasts (in coverage) or pre-configures a threshold (out of coverage).

The synchronisation information transmitted by the UE may be derived from information/ signals received from E-UTRAN (in coverage) or received from a UE acting as synchronisation reference for the transmitting UE. In the remainder, the UE acting as synchronisation reference is referred to as SyncRef UE.

DAINGEAN_0002000

5.10.7.2 Initiation

A UE capable of SLSS transmission shall, when transmitting sidelink discovery announcements in accordance with 5.10.6 and when the following conditions are met:

1> if in coverage on the frequency used for sidelink discovery, as defined in TS 36.304 [4, 11.4]:

2> if in RRC_CONNECTED; and if *networkControlledSyncTx* is configured and set to *on*; or

2> if *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType19*; and the RSRP measurement of the reference cell, selected as defined in 5.10.6b, is below the value of *syncTxThreshIC*:

3> if the sidelink discovery announcements are not PS related; or if *syncTxPeriodic* is not included:

4> transmit SLSS on the frequency used for sidelink discovery in accordance with 5.10.7.3 and TS 36.211 [21];

3> else:

4> transmit SLSS on the frequency used for sidelink discovery in accordance with 5.10.7.3 and TS 36.211 [21];

4> transmit the *MasterInformationBlock-SL* message on the frequency used for sidelink discovery, in the same subframe as SLSS, and in accordance with 5.10.7.4;

1> else (i.e. out of coverage, PS):

2> if *syncTxThreshOoC* is included in the preconfigured sidelink parameters (i.e. *SL-Preconfiguration* defined in 9.3); and the UE has not selected SyncRef UE or the S-RSRP measurement result of the selected SyncRef UE is below the value of *syncTxThreshOoC*:

3> transmit SLSS on the frequency used for sidelink discovery in accordance with 5.10.7.3 and TS 36.211 [21];

3> transmit the *MasterInformationBlock-SL* message on the frequency used for sidelink discovery, in the same subframe as SLSS, and in accordance with 5.10.7.4;

A UE capable of sidelink communication that is configured by upper layers to transmit sidelink communication shall, irrespective of whether or not it has data to transmit:

1> if the conditions for sidelink communication operation as defined in 5.10.1a are met:

2> if in RRC_CONNECTED; and if *networkControlledSyncTx* is configured and set to *on*:

3> transmit SLSS in accordance with 5.10.7.3 and TS 36.211 [21];

3> transmit the *MasterInformationBlock-SL* message, in the same subframe as SLSS, and in accordance with 5.10.7.4;

A UE shall, when transmitting sidelink communication in accordance with 5.10.4 and when the following conditions are met:

1> if in coverage on the frequency used for sidelink communication, as defined in TS 36.304 [4, 11.4]:

2> if the UE is in RRC_CONNECTED; and *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType18*; and the RSRP measurement of the cell chosen for sidelink communication transmission is below the value of *syncTxThreshIC*; or

2> if the UE is in RRC_IDLE; and *syncTxThreshIC* is included in *SystemInformationBlockType18*; and the RSRP measurement of the cell chosen for sidelink communication transmission is below the value of *syncTxThreshIC*:

3> transmit SLSS in accordance with 5.10.7.3 and TS 36.211 [21];

3> transmit the *MasterInformationBlock-SL* message, in the same subframe as SLSS, and in accordance with 5.10.7.4;

DAINGEAN_0002001

1> else (i.e. out of coverage):

2> if *syncTxThreshOoC* is included in the preconfigured sidelink parameters (i.e. *SL-Preconfiguration* defined in 9.3); and the UE has no selected SyncRef UE or the S-RSRP measurement result of the selected SyncRef UE is below the value of *syncTxThreshOoC*:

3> transmit SLSS in accordance with 5.10.7.3 and TS 36.211 [21];

3> transmit the *MasterInformationBlock-SL* message, in the same subframe as SLSS, and in accordance with 5.10.7.4;

5.10.7.3 Transmission of SLSS

The UE shall select the SLSSID and the subframe in which to transmit SLSS as follows:

1> if triggered by sidelink discovery announcement and in coverage on the frequency used for sidelink discovery, as defined in TS 36.304 [4, 11.4]:

2> select the SLSSID included in the entry of *discSyncConfig* included in the received *SystemInformationBlockType19*, that includes *txParameters*;

2> use *syncOffsetIndicator* corresponding to the selected SLSSID;

2> for each pool used for the transmission of discovery announcements (each corresponding to the selected SLSSID):

3> if a subframe indicated by *syncOffsetIndicator* corresponds to the first subframe of the discovery transmission pool;

4> if *discTxGapConfig* is configured and includes the concerned subframe; or the subframe is not used for regular uplink transmission:

5> select the concerned subframe;

3> else

4> if *discTxGapConfig* is configured and includes the concerned subframe; or the subframe is not used for regular uplink transmission:

5> select the subframe indicated by *syncOffsetIndicator* that precedes and which, in time domain, is nearest to the first subframe of the discovery transmission pool;

3> if the sidelink discovery announcements concern PS; and if *syncTxPeriodic* is included:

4> additionally select each subframe that periodically occurs 40 subframes after the selected subframe;

1> if triggered by sidelink communication and in coverage on the frequency used for sidelink communication, as defined in TS 36.304 [4, 11.4]:

2> select the SLSSID included in the entry of *commSyncConfig* that is included in the received *SystemInformationBlockType18* and includes *txParameters*;

2> use *syncOffsetIndicator* corresponding to the selected SLSSID;

2> if in RRC_CONNECTED; and if *networkControlledSyncTx* is configured and set to *on*:

3> select the subframe(s) indicated by *syncOffsetIndicator*;

2> else (when transmitting communication):

3> select the subframe(s) indicated by *syncOffsetIndicator* within the SC period in which the UE intends to transmit sidelink control information or data;

1> else (i.e. out of coverage on sidelink carrier):

2> select the synchronisation reference UE (i.e. SyncRef UE) as defined in 5.10.8;

DAINGEAN_0002002

2> if the UE has a selected SyncRef UE and *inCoverage* in the *MasterInformationBlock-SL* message received from this UE is set to *TRUE*; or

2> if the UE has a selected SyncRef UE and *inCoverage* in the *MasterInformationBlock-SL* message received from this UE is set to *FALSE* while the SLSS from this UE is part of the set defined for out of coverage, see TS 36.211 [21]:

3> select the same SLSSID as the SLSSID of the selected SyncRef UE;

3> select the subframe in which to transmit the SLSS according to the *syncOffsetIndicator1* or *syncOffsetIndicator2* included in the preconfigured sidelink parameters (i.e. *preconfigSync* in *SL-Preconfiguration* defined in 9.3), such that the subframe timing is different from the SLSS of the selected SyncRef UE;

2> else if the UE has a selected SyncRef UE:

3> select the SLSSID from the set defined for out of coverage having an index that is 168 more than the index of the SLSSID of the selected SyncRef UE, see TS 36.211 [21];

3> select the subframe in which to transmit the SLSS according to *syncOffsetIndicator1* or *syncOffsetIndicator2* included in the preconfigured sidelink parameters (i.e. *preconfigSync* in *SL-Preconfiguration* defined in 9.3), such that the subframe timing is different from the SLSS of the selected SyncRef UE;

2> else (i.e. no SyncRef UE selected):

3> randomly select, using a uniform distribution, an SLSSID from the set of sequences defined for out of coverage, see TS 36.211 [21];

3> select the subframe in which to transmit the SLSS according to the *syncOffsetIndicator1* or *syncOffsetIndicator2* (arbitrary selection between these) included in the preconfigured sidelink parameters (i.e. *preconfigSync* in *SL-Preconfiguration* defined in 9.3);

5.10.7.4 Transmission of *MasterInformationBlock-SL* message

The UE shall set the contents of the *MasterInformationBlock-SL* message as follows:

1> if in coverage on the frequency used for the sidelink operation (communication or discovery) that triggered this procedure as defined in TS 36.304 [4, 11.4]:

2> set *inCoverage* to *TRUE*;

2> set *sl-Bandwidth* to the value of *ul-Bandwidth* as included in the received *SystemInformationBlockType2* of the cell chosen for the concerned sidelink operation;

2> if *tdd-Config* is included in the received *SystemInformationBlockType1*:

3> set *subframeAssignmentSL* to the value representing the same meaning as of *subframeAssignment* that is included in *tdd-Config* in the received *SystemInformationBlockType1*;

2> else:

3> set *subframeAssignmentSL* to *none*;

2> if triggered by sidelink communication; and if *syncInfoReserved* is included in an entry of *commSyncConfig* from the received *SystemInformationBlockType18*;

3> set *reserved* to the value of *syncInfoReserved* in the received *SystemInformationBlockType18*;

2> if triggered by sidelink discovery; and if *syncInfoReserved* is included in an entry of *discSyncConfig* from the received *SystemInformationBlockType19*;

3> set *reserved* to the value of *syncInfoReserved* in the received *SystemInformationBlockType19*;

2> else:

DAINGEAN_0002003

3> set all bits in *reserved* to 0;

1> else if the UE has a selected SyncRef UE (as defined in 5.10.8):

2> set *inCoverage* to *FALSE*;

2> set *sl-Bandwidth*, *subframeAssignmentSL* and *reserved* to the value of the corresponding field included in the received *MasterInformationBlock-SL*;

1> else (i.e. no SyncRef UE selected):

2> set *inCoverage* to *FALSE*;

2> set *sl-Bandwidth*, *subframeAssignmentSL* and *reserved* to the value of the corresponding field included in the preconfigured sidelink parameters (i.e. *preconfigGeneral* in *SL-Preconfiguration* defined in 9.3);

1> set *directFrameNumber* and *directSubframeNumber* according to the subframe used to transmit the SLSS, as specified in 5.10.7.3;

1> submit the *MasterInformationBlock-SL* message to lower layers for transmission upon which the procedure ends;

5.10.7.5 Void

5.10.8 Sidelink synchronisation reference

5.10.8.1 General

The purpose of this procedure is to select a synchronisation reference and used a.o. when transmitting sidelink communication, sidelink discovery or synchronisation information.

5.10.8.2 Selection and reselection of synchronisation reference UE (SyncRef UE)

The UE shall:

1> for the frequency used for sidelink communication or discovery, if out of coverage on that frequency as defined in TS 36.304 [4, 11.4]:

2> perform a full search (i.e. covering all subframes and all possible SLSSIDs) to detect candidate SLSS, in accordance with TS 36.133 [16]

2> when evaluating the one or more detected SLSSIDs, apply layer 3 filtering as specified in 5.5.3.2 using the preconfigured *filterCoefficient* as defined in 9.3, before using the S-RSRP measurement results;

2> if the UE has selected a SyncRef UE:

3> if the S-RSRP of the strongest candidate SyncRef UE exceeds the minimum requirement TS 36.133 [16] by *syncRefMinHyst* and the strongest candidate SyncRef UE belongs to the same priority group as the current SyncRef UE and the S-RSRP of the strongest candidate SyncRef UE exceeds the S-RSRP of the current SyncRef UE by *syncRefDiffHyst*; or

3> if the S-RSRP of the candidate SyncRef UE exceeds the minimum requirement TS 36.133 [16] by *syncRefMinHyst* and the candidate SyncRef UE belongs to a higher priority group than the current SyncRef UE; or

3> if the S-RSRP of the current SyncRef UE is less than the minimum requirement TS 36.133 [16]:

4> consider no SyncRef UE to be selected;

2> if the UE has not selected a SyncRef UE,

3> if the UE detects one or more SLSSIDs for which the S-RSRP exceeds the minimum requirement defined in TS 36.133 [16] by *syncRefMinHyst* and for which the UE received the corresponding *MasterInformationBlock-SL* message (candidate SyncRef UEs), select a SyncRef UE according to the following priority order:

DAINGEAN_0002004

4> UEs of which *inCoverage*, included in the *MasterInformationBlock-SL* message received from this UE, is set to *TRUE*, starting with the UE with the highest S-RSRP result (priority group 1);

4> UE which SLSSID is part of the set defined for in coverage, starting with the UE with the highest S-RSRP result (priority group 2);

4> Other UEs, starting with the UE with the highest S-RSRP result (priority group 3);

5.10.9 Sidelink common control information

5.10.9.1 General

The sidelink common control information is carried by a single message, the *MasterInformationBlock-SL* (MIB-SL) message. The MIB-SL includes timing information as well as some configuration parameters and is transmitted via SL-BCH.

The MIB-SL uses a fixed schedule with a periodicity of 40 ms without repetitions. In particular, the MIB-SL is scheduled in subframes indicated by *syncOffsetIndicator* i.e. for which (10*DFN + subframe number) mod 40 = *syncOffsetIndicator*.

The sidelink common control information may change at any transmission i.e. neither a modification period nor a change notification mechanism is used.

A UE configured to receive or transmit sidelink communication or PS related sidelink discovery shall:

1> if the UE has a selected SyncRef UE, as specified in 5.10.8.2:

2> ensure having a valid version of the *MasterInformationBlock-SL* message of that SyncRefUE:

5.10.9.2 Actions related to reception of *MasterInformationBlock-SL* message

Upon receiving *MasterInformationBlock-SL*, the UE shall:

1> apply the values of *sl-Bandwidth*, *subframeAssignmentSL*, *directFrameNumber* and *directSubframeNumber* included in the received *MasterInformationBlock-SL* message;

5.10.10 Sidelink relay UE operation

5.10.10.1 General

This procedure is used by a UE supporting sidelink relay UE operation and involves evaluation of the AS-layer conditions that need to be met in order for upper layers to configure a sidelink relay UE to receive/ transmit relay related PS sidelink discovery/ relay related sidelink communication. The AS-layer conditions merely comprise of being configured with radio resources that can be used for transmission.

A UE that fulfils the criteria specified in 5.10.10.2 and 5.10.10.3 and that is configured by higher layers accordingly is acting as a sidelink relay UE.

5.10.10.2 AS-conditions for relay related sidelink communication transmission by sidelink relay UE

A UE capable of sidelink relay UE operation shall inform upper layers that it is configured with radio resources that can be used for relay related sidelink communication transmission if the following conditions are met:

1> if in RRC_CONNECTED; and if the UE is configured with *commTxResources*; and the UE is configured with *commTxAllowRelayDedicated* set to *true*;

DAINGEAN_0002005

5.10.10.3 AS-conditions for relay PS related sidelink discovery transmission by sidelink relay UE

A UE capable of sidelink relay UE operation shall inform upper layers that it is configured with radio resources that can be used for relay PS related sidelink discovery transmission if the following conditions are met:

1> if in RRC_IDLE; and if the UE's serving cell is suitable as defined in TS 36.304 [4]; and if *SystemInformationBlockType19* includes *discConfigPS* including *discTxPoolPS-Common* and *discConfigRelay*; and if the sidelink relay UE threshold conditions as specified in 5.10.10.4 are met;

1> else if in RRC_CONNECTED; and if *discTxResourcesPS* is configured;

5.10.10.4 Sidelink relay UE threshold conditions

A UE capable of sidelink relay UE operation shall:

1> if the threshold conditions specified in this section were not met:

2> if neither *threshHigh* nor *threshLow* is included in *relayUE-Config* within *SystemInformationBlockType19*:

3> consider the threshold conditions to be met (entry);

2> else if *threshHigh* is not included in *relayUE-Config* within *SystemInformationBlockType19*; or the RSRP measurement of the PCell, or the cell on which the UE camps, is below *threshHigh* by *hystMax* (also included within *relayUE-Config*); and

2> if *threshLow* is not included in *relayUE-Config* within *SystemInformationBlockType19*; or the RSRP measurement of the PCell, or the cell on which the UE camps, is above *threshLow* by *hystMin* (also included within *relayUE-Config*):

3> consider the threshold conditions to be met (entry);

1> else:

2> if *threshHigh* is included in *relayUE-Config* within *SystemInformationBlockType19*; and the RSRP measurement of the PCell, or the cell on which the UE camps, is above *threshHigh* (also included within *relayUE-Config*); or

2> if *threshLow* is included in *relayUE-Config* within *SystemInformationBlockType19*; and the RSRP measurement of the PCell, or the cell on which the UE camps, is below *threshLow* (also included within *relayUE-Config*);

3> consider the threshold conditions not to be met (leave);

5.10.11 Sidelink remote UE operation

5.10.11.1 General

This procedure is used by a UE supporting sidelink remote UE operation and involves evaluation of the AS-layer conditions that need to be met in order for upper layers to configure a sidelink remote UE to receive/ transmit relay related sidelink PS discovery/ relay related sidelink communication. The AS-layer conditions merely comprise of being configured with radio resources that can be used for transmission, as well as whether or not having a selected sidelink relay UE.

5.10.11.2 AS-conditions for relay related sidelink communication transmission by sidelink remote UE

A UE capable of sidelink remote UE operation shall inform upper layers whether it is configured with radio resources that can be used for relay related sidelink communication transmission if the following conditions are met:

1> if the UE is out of coverage; and is preconfigured with *SL-Preconfiguration* including *discTxPoolList* and *preconfigRelay*;

DAINGEAN_0002006

1> else if in RRC_IDLE; and if the UE's serving cell is suitable as defined in TS 36.304 [4]; and if *SystemInformationBlockType18* includes *commTxPoolNormalCommon* and *commTxAllowRelayCommon*; and if *SystemInformationBlockType19* includes *discConfigRelay*; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met;

1> else if in RRC_CONNECTED; and if the UE is configured with *commTxResources*; and the UE is configured with *commTxAllowRelayDedicated* set to *true*;

5.10.11.3 AS-conditions for relay PS related sidelink discovery transmission by sidelink remote UE

A UE capable of sidelink remote UE operation shall inform upper layers whether it is configured with radio resources that can be used for relay PS related sidelink discovery transmission if the following conditions are met:

1> if the UE is out of coverage; and is preconfigured with *SL-Preconfiguration* including *discTxPoolList* and *preconfigRelay*;

1> else if in RRC_IDLE; and if the UE's serving cell is suitable as defined in TS 36.304 [4]; and if *SystemInformationBlockType19* includes *discConfigPS* including *discTxPoolPS-Common* and *discConfigRelay*; and if the sidelink remote UE threshold conditions as specified in 5.10.11.5 are met;

1> else if in RRC_CONNECTED; and if *discTxResourcesPS* is configured;

5.10.11.4 Selection and reselection of sidelink relay UE

A UE capable of sidelink remote UE operation that is configured by upper layers to search for a sidelink relay UE shall:

1> if out of coverage on the frequency used for sidelink communication, as defined in TS 36.304 [4, 11.4]; or

1> if the serving frequency is used for sidelink communication and the RSRP measurement of the cell on which the UE camps (RRC_IDLE)/ the PCell (RRC_CONNECTED) is below *threshHigh* within *remoteUE-Config* :

2> search for candidate sidelink relay UEs, in accordance with TS 36.133 [16]

2> when evaluating the one or more detected sidelink relay UEs, apply layer 3 filtering as specified in 5.5.3.2 across measurements that concern the same ProSe Relay UE ID and using the *fiterCoefficient* in *SystemInformationBlockType19* (in coverage) or the preconfigured *filterCoefficient* as defined in 9.3(out of coverage), before using the SD-RSRP measurement results;

NOTE 1: The details of the interaction with upper layers are up to UE implementation.

2> if the UE does not have a selected sidelink relay UE:

3> select a candidate sidelink relay UE which SD-RSRP exceeds *q-RxLevMin* included in either *reselectionInfoIC* (in coverage) or *reselectionInfoOoC* (out of coverage) by *minHyst*;

2> else if SD-RSRP of the currently selected sidelink relay UE is below *q-RxLevMin* included in either *reselectionInfoIC* (in coverage) or *reselectionInfoOoC* (out of coverage); orif upper layers indicate not to use the currently selected sidelink relay: (i.e. sidelink relay UE reselection):

3> select a candidate sidelink relay UE which SD-RSRP exceeds *q-RxLevMin* included in either *reselectionInfoIC* (in coverage) or *reselectionInfoOoC* (out of coverage) by *minHyst*;

2> else if the UE did not detect any candidate sidelink relay UE which SD-RSRP exceeds *q-RxLevMin* included in either *reselectionInfoIC* (in coverage) or *reselectionInfoOoC* (out of coverage) by *minHyst*:

3> consider no sidelink relay UE to be selected;

NOTE 2: The UE may perform sidelink relay UE reselection in a manner resulting in selection of the sidelink relay UE, amongst all candidate sidelink relay UEs meeting higher layer criteria, that has the best radio link quality. Further details, including interaction with upper layers, are up to UE implementation.

DAINGEAN_0002007

5.10.11.5 Sidelink remote UE threshold conditions

A UE capable of sidelink remote UE operation shall:

1> if the threshold conditions specified in this section were not met:

2> if *threshHigh* is not included in *remoteUE-Config* within *SystemInformationBlockType19*; or

2> if *threshHigh* is included in *remoteUE-Config* within *SystemInformationBlockType19*; and the RSRP measurement of the PCell, or the cell on which the UE camps, is below *threshHigh* by *hystMax* (also included within *remoteUE-Config*):

3> consider the threshold conditions to be met (entry);

1> else:

2> if *threshHigh* is included in *remoteUE-Config* within *SystemInformationBlockType19*; and the RSRP measurement of the PCell, or the cell on which the UE camps, is above *threshHigh* (also included within *remoteUE-Config*):

3> consider the threshold conditions not to be met (leave);

6 Protocol data units, formats and parameters (tabular & ASN.1)

6.1 General

The contents of each RRC message is specified in sub-clause 6.2 using ASN.1 to specify the message syntax and using tables when needed to provide further detailed information about the fields specified in the message syntax. The syntax of the information elements that are defined as stand-alone abstract types is further specified in a similar manner in sub-clause 6.3.

The need for fields to be present in a message or an abstract type, i.e., the ASN.1 fields that are specified as OPTIONAL in the abstract notation (ASN.1), is specified by means of comment text tags attached to the OPTIONAL statement in the abstract syntax. All comment text tags are available for use in the downlink direction only. The meaning of each tag is specified in table 6.1-1.

Table 6.1-1: Meaning of abbreviations used to specify the need for fields to be present

Abbreviation	Meaning
Cond *conditionTag* (Used in downlink only)	*Conditionally present* A field for which the need is specified by means of conditions. For each *conditionTag*, the need is specified in a tabular form following the ASN.1 segment. In case, according to the conditions, a field is not present, the UE takes no action and where applicable shall continue to use the existing value (and/ or the associated functionality) unless explicitly stated otherwise (e.g. in the conditional presence table or in the description of the field itself).
Need OP (Used in downlink only)	*Optionally present* A field that is optional to signal. For downlink messages, the UE is not required to take any special action on absence of the field beyond what is specified in the procedural text or the field description table following the ASN.1 segment. The UE behaviour on absence should be captured either in the procedural text or in the field description.
Need ON (Used in downlink only)	*Optionally present, No action* A field that is optional to signal. If the message is received by the UE, and in case the field is absent, the UE takes no action and where applicable shall continue to use the existing value (and/ or the associated functionality).
Need OR (Used in downlink only)	*Optionally present, Release* A field that is optional to signal. If the message is received by the UE, and in case the field is absent, the UE shall discontinue/ stop using/ delete any existing value (and/ or the associated functionality).

Any field with Need ON in system information shall be interpreted as Need OR.

DAINGEAN_0002008

Need codes may not be specified for a parent extension field/ extension group, used in downlink, which includes one or more child extension fields. Upon absence of such a parent extension field/ extension group, the UE shall:

- For each individual child extension field, including extensions that are mandatory to include in the optional group, act in accordance with the need code that is defined for the extension;
- Apply this behaviour not only for child extension fields included directly within the optional parent extension field/ extension group, but also for extension fields defined at further nesting levels as long as for none of the fields in-between the concerned extension field and the parent extension field a need code is specified;

NOTE 1: The above applies for groups of non critical extensions using double brackets (referred to as extension groups), as well as non-critical extensions at the end of a message or at the end of a structure contained in a BIT STRING or OCTET STRING (referred to as parent extension fields).

Need codes, conditions and ASN.1 defaults specified for a particular (child) field only apply in case the (parent) field including the particular field is present. This rule does not apply for optional parent extension fields/ extension groups without need codes,

NOTE 2: The previous rule implies that E-UTRAN has to include such a parent extension field to release a child field that is either:

- Optional with need OR, or
- Conditional while the UE releases the child field when absent.

The handling of need codes as specified in the previous is illustrated by means of an example, as shown in the following ASN.1.

```
-- /example/ ASN1START

RRCMessage-r8-IEs ::=                   SEQUENCE {
    field1                                  InformationElement1,
    field2                                  InformationElement2             OPTIONAL,   -- Need ON
    nonCriticalExtension                    RRCMessage-v8a0-IEs             OPTIONAL
}

RRCMessage-v8a0-IEs ::=                 SEQUENCE {
    field3                                  InformationElement3             OPTIONAL,   -- Need ON
    nonCriticalExtension                    RRCMessage-v940-IEs             OPTIONAL
}

RRCMessage-v940-IEs ::=                 SEQUENCE {
    field4                                  InformationElement4             OPTIONAL,   -- Need OR
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

InformationElement1 ::=         SEQUENCE {
    field11                             InformationElement11                OPTIONAL,   -- Need ON
    field12                             InformationElement12                OPTIONAL,   -- Need OR
    ...,
    [[  field13                             InformationElement13            OPTIONAL,   -- Need OR
        field14                             InformationElement14            OPTIONAL    -- Need ON
    ]]
}

InformationElement2 ::=         SEQUENCE {
    field21                             InformationElement11                OPTIONAL,   -- Need OR
    ...
}

-- ASN1STOP
```

The handling of need codes as specified in the previous implies that:

- if *field2* in *RRCMessage-r8-IEs* is absent, the UE does not modify *field21*;
- if *field2* in *RRCMessage-r8-IEs* is present but does not include *field21*, the UE releases *field21*;
- if the extension group containing *field13* is absent, the UE releases *field13* and does not modify *field14*;

DAINGEAN_0002009

- if *nonCriticalExtension* defined by IE *RRCMessage-v8a0-IEs* is absent, the UE does not modify *field3* and releases *field4*;

6.2 RRC messages

NOTE: The messages included in this section reflect the current status of the discussions. Additional messages may be included at a later stage.

6.2.1 General message structure

– *EUTRA-RRC-Definitions*

This ASN.1 segment is the start of the E-UTRA RRC PDU definitions.

```
-- ASN1START

EUTRA-RRC-Definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ASN1STOP
```

– *BCCH-BCH-Message*

The *BCCH-BCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE via BCH on the BCCH logical channel.

```
-- ASN1START

BCCH-BCH-Message ::= SEQUENCE {
    message                 BCCH-BCH-MessageType
}

BCCH-BCH-MessageType ::=                        MasterInformationBlock

-- ASN1STOP
```

– *BCCH-DL-SCH-Message*

The *BCCH-DL-SCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE via DL-SCH on the BCCH logical channel.

```
-- ASN1START

BCCH-DL-SCH-Message ::= SEQUENCE {
    message                 BCCH-DL-SCH-MessageType
}

BCCH-DL-SCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        systemInformation                       SystemInformation,
        systemInformationBlockType1             SystemInformationBlockType1
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```


DAINGEAN_0002010

– BCCH-DL-SCH-Message-BR

The *BCCH-DL-SCH-Message-BR* class is the set of RRC messages that may be sent from the E-UTRAN to the UE via DL-SCH on the BR-BCCH logical channel.

```
-- ASN1START

BCCH-DL-SCH-Message-BR ::= SEQUENCE {
    message                 BCCH-DL-SCH-MessageType-BR-r13
}

BCCH-DL-SCH-MessageType-BR-r13 ::= CHOICE {
    c1                      CHOICE {
        systemInformation-BR-r13                SystemInformation-BR-r13,
        systemInformationBlockType1-BR-r13      SystemInformationBlockType1-BR-r13
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– MCCH-Message

The *MCCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the MCCH logical channel.

```
-- ASN1START

MCCH-Message ::=        SEQUENCE {
    message                 MCCH-MessageType
}

MCCH-MessageType ::= CHOICE {
    c1                          CHOICE {
        mbsfnAreaConfiguration-r9       MBSFNAreaConfiguration-r9
    },
    later                       CHOICE {
        c2                              CHOICE{
            mbmsCountingRequest-r10         MBMSCountingRequest-r10
        },
        messageClassExtension   SEQUENCE {}
    }
}

-- ASN1STOP
```

– PCCH-Message

The *PCCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the PCCH logical channel.

```
-- ASN1START

PCCH-Message ::= SEQUENCE {
    message                 PCCH-MessageType
}

PCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        paging                                  Paging
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```


DAINGEAN_0002011

– *DL-CCCH-Message*

The *DL-CCCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the downlink CCCH logical channel.

```
-- ASN1START

DL-CCCH-Message ::= SEQUENCE {
    message                 DL-CCCH-MessageType
}

DL-CCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        rrcConnectionReestablishment            RRCConnectionReestablishment,
        rrcConnectionReestablishmentReject      RRCConnectionReestablishmentReject,
        rrcConnectionReject                     RRCConnectionReject,
        rrcConnectionSetup                      RRCConnectionSetup
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– *DL-DCCH-Message*

The *DL-DCCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE or from the E-UTRAN to the RN on the downlink DCCH logical channel.

```
-- ASN1START

DL-DCCH-Message ::= SEQUENCE {
    message                 DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        csfbParametersResponseCDMA2000          CSFBParametersResponseCDMA2000,
        dlInformationTransfer                   DLInformationTransfer,
        handoverFromEUTRAPreparationRequest     HandoverFromEUTRAPreparationRequest,
        mobilityFromEUTRACommand                MobilityFromEUTRACommand,
        rrcConnectionReconfiguration            RRCConnectionReconfiguration,
        rrcConnectionRelease                    RRCConnectionRelease,
        securityModeCommand                     SecurityModeCommand,
        ueCapabilityEnquiry                     UECapabilityEnquiry,
        counterCheck                            CounterCheck,
        ueInformationRequest-r9                 UEInformationRequest-r9,
        loggedMeasurementConfiguration-r10      LoggedMeasurementConfiguration-r10,
        rnReconfiguration-r10                   RNReconfiguration-r10,
        rrcConnectionResume-r13                 RRCConnectionResume-r13,
        spare3 NULL, spare2 NULL, spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– *UL-CCCH-Message*

The *UL-CCCH-Message* class is the set of RRC messages that may be sent from the UE to the E-UTRAN on the uplink CCCH logical channel.

```
-- ASN1START

UL-CCCH-Message ::= SEQUENCE {
    message                 UL-CCCH-MessageType
}

UL-CCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        rrcConnectionReestablishmentRequest     RRCConnectionReestablishmentRequest,
        rrcConnectionRequest                    RRCConnectionRequest
```


DAINGEAN_0002012

```
    },
    messageClassExtension   CHOICE {
        c2                      CHOICE {
            rrcConnectionResumeRequest-r13          RRCConnectionResumeRequest-r13
        },
        messageClassExtensionFuture-r13 SEQUENCE {}
        }
}

-- ASN1STOP
```

– *UL-DCCH-Message*

The *UL-DCCH-Message* class is the set of RRC messages that may be sent from the UE to the E-UTRAN or from the RN to the E-UTRAN on the uplink DCCH logical channel.

```
-- ASN1START

UL-DCCH-Message ::= SEQUENCE {
    message         UL-DCCH-MessageType
}

UL-DCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        csfbParametersRequestCDMA2000           CSFBParametersRequestCDMA2000,
        measurementReport                       MeasurementReport,
        rrcConnectionReconfigurationComplete    RRCConnectionReconfigurationComplete,
        rrcConnectionReestablishmentComplete    RRCConnectionReestablishmentComplete,
        rrcConnectionSetupComplete              RRCConnectionSetupComplete,
        securityModeComplete                    SecurityModeComplete,
        securityModeFailure                     SecurityModeFailure,
        ueCapabilityInformation                 UECapabilityInformation,
        ulHandoverPreparationTransfer           ULHandoverPreparationTransfer,
        ulInformationTransfer                   ULInformationTransfer,
        counterCheckResponse                    CounterCheckResponse,
        ueInformationResponse-r9                UEInformationResponse-r9,
        proximityIndication-r9                  ProximityIndication-r9,
        rnReconfigurationComplete-r10           RNReconfigurationComplete-r10,
        mbmsCountingResponse-r10                MBMSCountingResponse-r10,
        interFreqRSTDMeasurementIndication-r10  InterFreqRSTDMeasurementIndication-r10
    },
    messageClassExtension   CHOICE {
        c2                          CHOICE {
            ueAssistanceInformation-r11         UEAssistanceInformation-r11,
            inDeviceCoexIndication-r11          InDeviceCoexIndication-r11,
            mbmsInterestIndication-r11          MBMSInterestIndication-r11,
            scgFailureInformation-r12           SCGFailureInformation-r12,
            sidelinkUEInformation-r12           SidelinkUEInformation-r12,
            wlanConnectionStatusReport-r13          WLANConnectionStatusReport-r13,
            rrcConnectionResumeComplete-r13     RRCConnectionResumeComplete-r13,
            spare9 NULL, spare8 NULL, spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        messageClassExtensionFuture-r11 SEQUENCE {}
    }
}

-- ASN1STOP
```

– *SC-MCCH-Message*

The *SC-MCCH-Message* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the SC-MCCH logical channel.

```
-- ASN1START

SC-MCCH-Message-r13 ::= SEQUENCE {
    message                 SC-MCCH-MessageType-r13
}
```


DAINGEAN_0002013

```
SC-MCCH-MessageType-r13 ::= CHOICE {
    c1                      CHOICE {
        scptmConfiguration-r13                  SCPTMConfiguration-r13
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

6.2.2 Message definitions

– *CounterCheck*

The *CounterCheck* message is used by the E-UTRAN to indicate the current COUNT MSB values associated to each DRB and to request the UE to compare these to its COUNT MSB values and to report the comparison results to E-UTRAN.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

CounterCheck message

```
-- ASN1START

CounterCheck ::=            SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            counterCheck-r8                     CounterCheck-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

CounterCheck-r8-IEs ::= SEQUENCE {
    drb-CountMSB-InfoList               DRB-CountMSB-InfoList,
    nonCriticalExtension                CounterCheck-v8a0-IEs               OPTIONAL
}

CounterCheck-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

DRB-CountMSB-InfoList ::=       SEQUENCE (SIZE (1..maxDRB)) OF DRB-CountMSB-Info

DRB-CountMSB-Info ::=   SEQUENCE {
    drb-Identity                DRB-Identity,
    countMSB-Uplink             INTEGER(0..33554431),
    countMSB-Downlink           INTEGER(0..33554431)
}

-- ASN1STOP
```

***CounterCheck* field descriptions**
count-MSB-Downlink
Indicates the value of 25 MSBs from downlink COUNT associated to this DRB.
count-MSB-Uplink
Indicates the value of 25 MSBs from uplink COUNT associated to this DRB.
drb-CountMSB-InfoList
Indicates the MSBs of the COUNT values of the DRBs.

DAINGEAN_0002014

– *CounterCheckResponse*

The *CounterCheckResponse* message is used by the UE to respond to a *CounterCheck* message.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

CounterCheckResponse message

```
-- ASN1START

CounterCheckResponse ::=            SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        counterCheckResponse-r8             CounterCheckResponse-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

CounterCheckResponse-r8-IEs ::= SEQUENCE {
    drb-CountInfoList                   DRB-CountInfoList,
    nonCriticalExtension                CounterCheckResponse-v8a0-IEs       OPTIONAL
}

CounterCheckResponse-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

DRB-CountInfoList ::=           SEQUENCE (SIZE (0..maxDRB)) OF DRB-CountInfo

DRB-CountInfo ::=   SEQUENCE {
    drb-Identity                    DRB-Identity,
    count-Uplink                    INTEGER(0..4294967295),
    count-Downlink                  INTEGER(0..4294967295)
}

-- ASN1STOP
```

***CounterCheckResponse* field descriptions**
count-Downlink Indicates the value of downlink COUNT associated to this DRB.
count-Uplink Indicates the value of uplink COUNT associated to this DRB.
drb-CountInfoList Indicates the COUNT values of the DRBs.

– *CSFBParametersRequestCDMA2000*

The *CSFBParametersRequestCDMA2000* message is used by the UE to obtain the CDMA2000 1xRTT Parameters from the network. The UE needs these parameters to generate the CDMA2000 1xRTT Registration message used to register with the CDMA2000 1xRTT Network which is required to support CSFB to CDMA2000 1xRTT.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

CSFBParametersRequestCDMA2000 message

```
-- ASN1START
```


DAINGEAN_0002015

```
CSFBParametersRequestCDMA2000 ::= SEQUENCE {
    criticalExtensions                CHOICE {
        csfbParametersRequestCDMA2000-r8    CSFBParametersRequestCDMA2000-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

CSFBParametersRequestCDMA2000-r8-IEs ::= SEQUENCE {
    nonCriticalExtension              CSFBParametersRequestCDMA2000-v8a0-IEs  OPTIONAL
}

CSFBParametersRequestCDMA2000-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension          OCTET STRING                        OPTIONAL,
    nonCriticalExtension              SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *CSFBParametersResponseCDMA2000*

The *CSFBParametersResponseCDMA2000* message is used to provide the CDMA2000 1xRTT Parameters to the UE so the UE can register with the CDMA2000 1xRTT Network to support CSFB to CDMA2000 1xRTT.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

```
CSFBParametersResponseCDMA2000 message
-- ASN1START

CSFBParametersResponseCDMA2000 ::= SEQUENCE {
    rrc-TransactionIdentifier         RRC-TransactionIdentifier,
    criticalExtensions                CHOICE {
        csfbParametersResponseCDMA2000-r8       CSFBParametersResponseCDMA2000-r8-IEs,
        criticalExtensionsFuture                SEQUENCE {}
    }
}

CSFBParametersResponseCDMA2000-r8-IEs ::= SEQUENCE {
    rand                              RAND-CDMA2000,
    mobilityParameters                MobilityParametersCDMA2000,
    nonCriticalExtension              CSFBParametersResponseCDMA2000-v8a0-IEs OPTIONAL
}

CSFBParametersResponseCDMA2000-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension          OCTET STRING                        OPTIONAL,
    nonCriticalExtension              SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *DLInformationTransfer*

The *DLInformationTransfer* message is used for the downlink transfer of NAS or non-3GPP dedicated information.

Signalling radio bearer: SRB2 or SRB1 (only if SRB2 not established yet. If SRB2 is suspended, E-UTRAN does not send this message until SRB2 is resumed.)

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

DAINGEAN_0002016

DLInformationTransfer message

```
-- ASN1START

DLInformationTransfer ::=           SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            dlInformationTransfer-r8            DLInformationTransfer-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

DLInformationTransfer-r8-IEs ::=    SEQUENCE {
    dedicatedInfoType                   CHOICE {
        dedicatedInfoNAS                    DedicatedInfoNAS,
        dedicatedInfoCDMA2000-1XRTT         DedicatedInfoCDMA2000,
        dedicatedInfoCDMA2000-HRPD          DedicatedInfoCDMA2000
    },
    nonCriticalExtension                DLInformationTransfer-v8a0-IEs      OPTIONAL
}

DLInformationTransfer-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *HandoverFromEUTRAPreparationRequest* (CDMA2000)

The *HandoverFromEUTRAPreparationRequest* message is used to trigger the handover preparation procedure with a CDMA2000 RAT. This message is also used to trigger a tunneled preparation procedure with a CDMA2000 1xRTT RAT to obtain traffic channel resources for the enhanced CS fallback to CDMA2000 1xRTT, which may also involve a concurrent preparation for handover to CDMA2000 HRPD. Also, this message is used to trigger the dual Rx/Tx redirection procedure with a CDMA2000 1xRTT RAT.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

HandoverFromEUTRAPreparationRequest message

```
-- ASN1START

HandoverFromEUTRAPreparationRequest ::= SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            handoverFromEUTRAPreparationRequest-r8
                                                HandoverFromEUTRAPreparationRequest-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

HandoverFromEUTRAPreparationRequest-r8-IEs ::= SEQUENCE {
    cdma2000-Type                   CDMA2000-Type,
    rand                            RAND-CDMA2000               OPTIONAL,   -- Cond cdma2000-Type
    mobilityParameters              MobilityParametersCDMA2000  OPTIONAL,   -- Cond cdma2000-Type
    nonCriticalExtension            HandoverFromEUTRAPreparationRequest-v890-IEs    OPTIONAL
}

HandoverFromEUTRAPreparationRequest-v890-IEs ::= SEQUENCE {
    lateNonCriticalExtension        OCTET STRING                OPTIONAL,
    nonCriticalExtension            HandoverFromEUTRAPreparationRequest-v920-IEs    OPTIONAL
```


DAINGEAN_0002017

```
}

HandoverFromEUTRAPreparationRequest-v920-IEs ::= SEQUENCE {
    concurrPrepCDMA2000-HRPD-r9     BOOLEAN                 OPTIONAL,   -- Cond cdma2000-Type
    nonCriticalExtension            HandoverFromEUTRAPreparationRequest-v1020-IEs   OPTIONAL
}

HandoverFromEUTRAPreparationRequest-v1020-IEs ::= SEQUENCE {
    dualRxTxRedirectIndicator-r10       ENUMERATED {true}       OPTIONAL,   -- Cond cdma2000-1XRTT
    redirectCarrierCDMA2000-1XRTT-r10   CarrierFreqCDMA2000     OPTIONAL,   -- Cond dualRxTxRedirect
    nonCriticalExtension                SEQUENCE {}             OPTIONAL
}

-- ASN1STOP
```

***HandoverFromEUTRAPreparationRequest* field descriptions**
concurrPrepCDMA2000-HRPD Value TRUE indicates that upper layers should initiate concurrent preparation for handover to CDMA2000 HRPD in addition to preparation for enhanced CS fallback to CDMA2000 1xRTT.
dualRxTxRedirectIndicator Value TRUE indicates that the second radio of the dual Rx/Tx UE is being redirected to CDMA2000 1xRTT [51].
redirectCarrierCDMA2000-1XRTT Used to indicate the CDMA2000 1xRTT carrier frequency where the UE is being redirected to.

Conditional presence	Explanation
cdma2000-1XRTT	The field is optionally present, need ON, if the *cdma2000-Type* = *type1XRTT*; otherwise it is not present.
cdma2000-Type	The field is mandatory present if the *cdma2000-Type* = *type1XRTT*; otherwise it is not present.
dualRxTxRedirect	The field is optionally present, need ON, if *dualRxTxRedirectIndicator* is present; otherwise it is not present.

– *InDeviceCoexIndication*

The *InDeviceCoexIndication* message is used to inform E-UTRAN about IDC problems which can not be solved by the UE itself, as well as to provide information that may assist E-UTRAN when resolving these problems.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

InDeviceCoexIndication message

```
-- ASN1START

InDeviceCoexIndication-r11 ::=      SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            inDeviceCoexIndication-r11              InDeviceCoexIndication-r11-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

InDeviceCoexIndication-r11-IEs ::=  SEQUENCE {
    affectedCarrierFreqList-r11         AffectedCarrierFreqList-r11             OPTIONAL,
    tdm-AssistanceInfo-r11              TDM-AssistanceInfo-r11                  OPTIONAL,
    lateNonCriticalExtension            OCTET STRING                            OPTIONAL,
    nonCriticalExtension                InDeviceCoexIndication-v11d0-IEs        OPTIONAL
}

InDeviceCoexIndication-v11d0-IEs ::=    SEQUENCE {
    ul-CA-AssistanceInfo-r11            SEQUENCE {
```


DAINGEAN_0002018

```
        affectedCarrierFreqCombList-r11 AffectedCarrierFreqCombList-r11         OPTIONAL,
        victimSystemType-r11                VictimSystemType-r11
    }                                                                           OPTIONAL,
    nonCriticalExtension                InDeviceCoexIndication-v1310-IEs
    OPTIONAL
}

InDeviceCoexIndication-v1310-IEs ::=    SEQUENCE {
    affectedCarrierFreqList-v1310       AffectedCarrierFreqList-v1310           OPTIONAL,
    affectedCarrierFreqCombList-r13 AffectedCarrierFreqCombList-r13     OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                             OPTIONAL
}

AffectedCarrierFreqList-r11 ::= SEQUENCE (SIZE (1..maxFreqIDC-r11)) OF AffectedCarrierFreq-r11

AffectedCarrierFreqList-v1310 ::= SEQUENCE (SIZE (1..maxFreqIDC-r11)) OF AffectedCarrierFreq-v1310

AffectedCarrierFreq-r11 ::= SEQUENCE {
    carrierFreq-r11             MeasObjectId,
    interferenceDirection-r11   ENUMERATED {eutra, other, both, spare}
}

AffectedCarrierFreq-v1310 ::=   SEQUENCE {
    carrierFreq-v1310               MeasObjectId-v1310                          OPTIONAL
}

AffectedCarrierFreqCombList-r11 ::= SEQUENCE (SIZE (1..maxCombIDC-r11)) OF AffectedCarrierFreqComb-
r11

AffectedCarrierFreqCombList-r13 ::= SEQUENCE (SIZE (1..maxCombIDC-r11)) OF AffectedCarrierFreqComb-
r13

AffectedCarrierFreqComb-r11 ::= SEQUENCE (SIZE (2..maxServCell-r10)) OF MeasObjectId

AffectedCarrierFreqComb-r13 ::= SEQUENCE (SIZE (2..maxServCell-r13)) OF MeasObjectId-r13

TDM-AssistanceInfo-r11 ::=  CHOICE {
    drx-AssistanceInfo-r11              SEQUENCE {
        drx-CycleLength-r11                 ENUMERATED {sf40, sf64, sf80, sf128, sf160,
                                                sf256, spare2, spare1},
        drx-Offset-r11                      INTEGER (0..255)    OPTIONAL,
        drx-ActiveTime-r11                  ENUMERATED {sf20, sf30, sf40, sf60, sf80,
                                                sf100, spare2, spare1}
    },
    idc-SubframePatternList-r11         IDC-SubframePatternList-r11,
    ...
}

IDC-SubframePatternList-r11 ::= SEQUENCE (SIZE (1..maxSubframePatternIDC-r11)) OF IDC-
SubframePattern-r11

IDC-SubframePattern-r11 ::= CHOICE {
    subframePatternFDD-r11              BIT STRING (SIZE (4)),
    subframePatternTDD-r11              CHOICE {
        subframeConfig0-r11                 BIT STRING (SIZE (70)),
        subframeConfig1-5-r11               BIT STRING (SIZE (10)),
        subframeConfig6-r11                 BIT STRING (SIZE (60))
    },
    ...
}

VictimSystemType-r11 ::= SEQUENCE {
    gps-r11                             ENUMERATED {true}               OPTIONAL,
    glonass-r11                         ENUMERATED {true}               OPTIONAL,
    bds-r11                             ENUMERATED {true}               OPTIONAL,
    galileo-r11                         ENUMERATED {true}               OPTIONAL,
    wlan-r11                            ENUMERATED {true}               OPTIONAL,
    bluetooth-r11                       ENUMERATED {true}               OPTIONAL
}

-- ASN1STOP
```


DAINGEAN_0002019

InDeviceCoexIndication field descriptions
AffectedCarrierFreq If *carrierFreq-v1310* is included, *carrierFreq-r11* is ignored by eNB.
affectedCarrierFreqCombList Indicates a list of E-UTRA carrier frequencies that are affected by IDC problems due to Inter-Modulation Distortion and harmonics from E-UTRA when configured with UL CA. *affectedCarrierFreqCombList-r13* is used when more than 5 serving cells are configured or affected combinations contain *MeasObjectId* larger than 32. If *affectedCarrierFreqCombList-r13* is included, *affectedCarrierFreqCombList-r11* shall not be included.
affectedCarrierFreqList List of E-UTRA carrier frequencies affected by IDC problems. If E-UTRAN includes *affectedCarrierFreqList-v1310* it includes the same number of entries, and listed in the same order, as in *affectedCarrierFreqList-r11*.
drx-ActiveTime Indicates the desired active time that the E-UTRAN is recommended to configure. Value in number of subframes. Value sf20 corresponds to 20 subframes, sf30 corresponds to 30 subframes and so on.
drx-CycleLength Indicates the desired DRX cycle length that the E-UTRAN is recommended to configure. Value in number of subframes. Value sf40 corresponds to 40 subframes, sf64 corresponds to 64 subframes and so on.
drx-Offset Indicates the desired DRX starting offset that the E-UTRAN is recommended to configure. The UE shall set the value of drx-Offset smaller than the value of *drx-CycleLength*. The starting frame and subframe satisfy the relation: [(SFN * 10) + subframe number] modulo (*drx-CycleLength*) = *drx-Offset*.
idc-SubframePatternList A list of one or more subframe patterns indicating which HARQ process E-UTRAN is requested to abstain from using. Value 0 indicates that E-UTRAN is requested to abstain from using the subframe. For FDD, the radio frame in which the pattern starts (i.e. the radio frame in which the first/leftmost bit of the *subframePatternFDD* corresponds to subframe #0) occurs when SFN mod 2 = 0. For TDD, the first/leftmost bit corresponds to the subframe #0 of the radio frame satisfying SFN mod x = 0, where x is the size of the bit string divided by 10. The UE shall indicate a subframe pattern that follows HARQ time line, as specified in TS 36.213 [23], i.e, if a subframe is set to 1 in the subframe pattern, also the corresponding subframes carrying the potential UL grant [23, 8.0], the UL HARQ retransmission [23, 8.0] and the DL/UL HARQ feedback [23, 7.3, 8.3 and 9.1.2] shall be set to 1.
interferenceDirection Indicates the direction of IDC interference. Value *eutra* indicates that only E-UTRA is victim of IDC interference, value *other* indicates that only another radio is victim of IDC interference and value *both* indicates that both E-UTRA and another radio are victims of IDC interference. The other radio refers to either the ISM radio or GNSS (see 3GPP TR 36.816 [63]).
victimSystemType Indicate the list of victim system types to which IDC interference is caused from E-UTRA when configured with UL CA. Value *gps*, *glonass*, *bds* and *galileo* indicates the type of GNSS. Value *wlan* indicates WLAN and value *bluetooth* indicates Bluetooth.

– *InterFreqRSTDMeasurementIndication*

The *InterFreqRSTDMeasurementIndication* message is used to indicate that the UE is going to either start or stop OTDOA inter-frequency RSTD measurement which requires measurement gaps as specified in TS 36.133 [16, 8.1.2.6].

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

InterFreqRSTDMeasurementIndication message

```
-- ASN1START

InterFreqRSTDMeasurementIndication-r10 ::=          SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            interFreqRSTDMeasurementIndication-r10  InterFreqRSTDMeasurementIndication-r10-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

InterFreqRSTDMeasurementIndication-r10-IEs ::=      SEQUENCE {
```


DAINGEAN_0002020

```
    rstd-InterFreqIndication-r10        CHOICE {
        start                               SEQUENCE {
            rstd-InterFreqInfoList-r10              RSTD-InterFreqInfoList-r10
        },
        stop                                NULL
    },
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

RSTD-InterFreqInfoList-r10 ::=  SEQUENCE (SIZE(1..maxRSTD-Freq-r10)) OF RSTD-InterFreqInfo-r10

RSTD-InterFreqInfo-r10 ::=      SEQUENCE {
    carrierFreq-r10                 ARFCN-ValueEUTRA,
    measPRS-Offset-r10              INTEGER (0..39),
    ...,
    [[  carrierFreq-v1090           ARFCN-ValueEUTRA-v9e0               OPTIONAL
    ]]
}

-- ASN1STOP
```

***InterFreqRSTDMeasurementIndication* field descriptions**
carrierFreq The EARFCN value of the carrier received from upper layers for which the UE needs to perform the inter-frequency RSTD measurements. If the UE includes *carrierFreq-v1090*, it shall set *carrierFreq-r10* to *maxEARFCN*.
measPRS-Offset Indicates the requested gap offset for performing inter-frequency RSTD measurements. It is the smallest subframe offset from the beginning of subframe 0 of SFN=0 of the serving cell of the requested gap for measuring PRS positioning occasions in the carrier frequency *carrierFreq* for which the UE needs to perform the inter-frequency RSTD measurements. The PRS positioning occasion information is received from upper layers. The value of *measPRS-Offset* is obtained by mapping the starting subframe of the PRS positioning occasion in the measured cell onto the corresponding subframe in the serving cell and is calculated as the serving cell's number of subframes from SFN=0 mod 40. The UE shall take into account any additional time required by the UE to start PRS measurements on the other carrier when it does this mapping for determining the *measPRS-Offset*. NOTE: Figure 6.2.2-1 illustrates the *measPRS-Offset* field.
rstd-InterFreqIndication Indicates the inter-frequency RSTD measurement action, i.e. the UE is going to start or stop inter-frequency RSTD measurement.

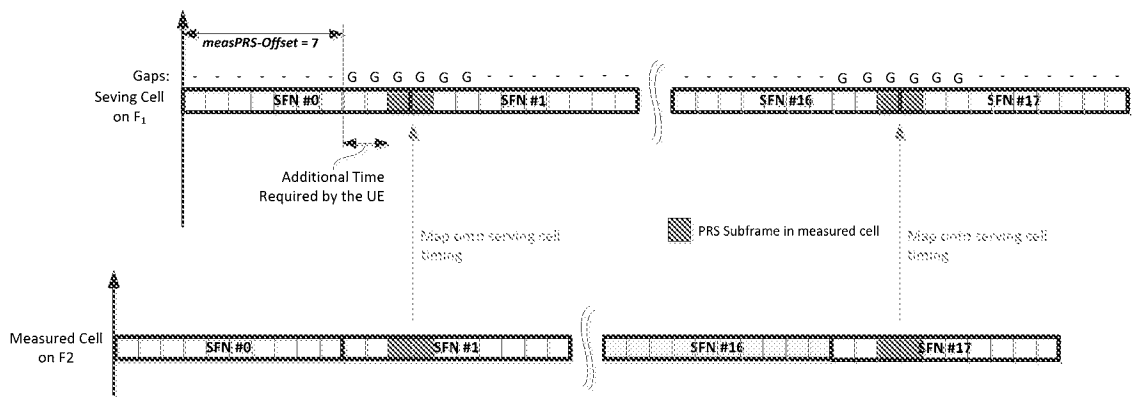


Figure 6.2.2-1 (informative): Exemplary calculation of *measPRS-Offset* field.

– *LoggedMeasurementConfiguration*

The *LoggedMeasurementConfiguration* message is used by E-UTRAN to configure the UE to perform logging of measurement results while in RRC_IDLE or to perform logging of measurement results for MBSFN while in both

DAINGEAN_0002021

RRC_IDLE and RRC_CONNECTED. It is used to transfer the logged measurement configuration for network performance optimisation, see TS 37.320 [60].

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

LoggedMeasurementConfiguration message

```
-- ASN1START

LoggedMeasurementConfiguration-r10 ::=  SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            loggedMeasurementConfiguration-r10      LoggedMeasurementConfiguration-r10-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture                SEQUENCE {}
    }
}


LoggedMeasurementConfiguration-r10-IEs ::= SEQUENCE {
    traceReference-r10              TraceReference-r10,
    traceRecordingSessionRef-r10    OCTET STRING (SIZE (2)),
    tce-Id-r10                      OCTET STRING (SIZE (1)),
    absoluteTimeInfo-r10            AbsoluteTimeInfo-r10,
    areaConfiguration-r10           AreaConfiguration-r10       OPTIONAL,   -- Need OR
    loggingDuration-r10             LoggingDuration-r10,
    loggingInterval-r10             LoggingInterval-r10,
    nonCriticalExtension            LoggedMeasurementConfiguration-v1080-IEs    OPTIONAL
}

LoggedMeasurementConfiguration-v1080-IEs ::= SEQUENCE {
    lateNonCriticalExtension-r10    OCTET STRING                        OPTIONAL,
    nonCriticalExtension            LoggedMeasurementConfiguration-v1130-IEs    OPTIONAL
}

LoggedMeasurementConfiguration-v1130-IEs ::= SEQUENCE {
    plmn-IdentityList-r11           PLMN-IdentityList3-r11      OPTIONAL,   -- Need OR
    areaConfiguration-v1130         AreaConfiguration-v1130     OPTIONAL,   -- Need OR
    nonCriticalExtension            LoggedMeasurementConfiguration-v1250-IEs    OPTIONAL
}

LoggedMeasurementConfiguration-v1250-IEs ::= SEQUENCE {
    targetMBSFN-AreaList-r12    TargetMBSFN-AreaList-r12        OPTIONAL,   -- Need OP
    nonCriticalExtension            SEQUENCE {}                 OPTIONAL
}

TargetMBSFN-AreaList-r12 ::=            SEQUENCE (SIZE (0..maxMBSFN-Area)) OF TargetMBSFN-Area-r12

TargetMBSFN-Area-r12 ::=                SEQUENCE {
    mbsfn-AreaId-r12                    MBSFN-AreaId-r12        OPTIONAL,   -- Need OR
    carrierFreq-r12                     ARFCN-ValueEUTRA-r9,
    ...
}

-- ASN1STOP
```


DAINGEAN_0002022

LoggedMeasurementConfiguration field descriptions
absoluteTimeInfo Indicates the absolute time in the current cell.
areaConfiguration Used to restrict the area in which the UE performs measurement logging to cells broadcasting either one of the included cell identities or one of the included tracking area codes/ identities.
plmn-IdentityList Indicates a set of PLMNs defining when the UE performs measurement logging as well as the associated status indication and information retrieval i.e. the UE performs these actions when the RPLMN is part of this set of PLMNs.
targetMBSFN-AreaList Used to indicate logging of MBSFN measurements and further restrict the area and frequencies for which the UE performs measurement logging for MBSFN. If both MBSFN area id and carrier frequency are present, a specific MBSFN area is indicated. If only carrier frequency is present, all MBSFN areas on that carrier frequency are indicated. If there is no entry in the list, any MBSFN area is indicated.
tce-Id Parameter Trace Collection Entity Id: See TS 32.422 [58].
traceRecordingSessionRef Parameter Trace Recording Session Reference: See TS 32.422 [58]

– *MasterInformationBlock*

The *MasterInformationBlock* includes the system information transmitted on BCH.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: BCCH

Direction: E-UTRAN to UE

MasterInformationBlock

```
-- ASN1START

MasterInformationBlock ::=          SEQUENCE {
    dl-Bandwidth                        ENUMERATED {
                                            n6, n15, n25, n50, n75, n100},
    phich-Config                        PHICH-Config,
    systemFrameNumber                   BIT STRING (SIZE (8)),
    schedulingInfoSIB1-BR-r13           INTEGER (0..31),
    spare                               BIT STRING (SIZE (5))
}


-- ASN1STOP
```

MasterInformationBlock field descriptions
dl-Bandwidth Parameter: transmission bandwidth configuration, N_{RB} in downlink, see TS 36.101 [42, table 5.6-1]. n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on.
phich-Config Specifies the PHICH configuration. If the UE is a BL UE or UE in CE, it shall ignore this field.
schedulingInfoSIB1-BR This field contains an index to a table that defines *SystemInformationBlockType1-BR* scheduling information. The table is specified in TS 36.213 [23, Table 7.1.6-1 and Table 7.1.7.2.7-1]. Value 0 means that *SystemInformationBlockType1-BR* is not scheduled.
systemFrameNumber Defines the 8 most significant bits of the SFN. As indicated in TS 36.211 [21, 6.6.1], the 2 least significant bits of the SFN are acquired implicitly in the P-BCH decoding, i.e. timing of 40ms P-BCH TTI indicates 2 least significant bits (within 40ms P-BCH TTI, the first radio frame: 00, the second radio frame: 01, the third radio frame: 10, the last radio frame: 11). One value applies for all serving cells of a Cell Group (i.e. MCG or SCG). The associated functionality is common (i.e. not performed independently for each cell).

DAINGEAN_0002023

– *MBMSCountingRequest*

The *MBMSCountingRequest* message is used by E-UTRAN to count the UEs that are receiving or interested to receive specific MBMS services.

Signalling radio bearer: N/A

RLC-SAP: UM

Logical channel: MCCH

Direction: E-UTRAN to UE

MBMSCountingRequest message

```
-- ASN1START

MBMSCountingRequest-r10 ::=     SEQUENCE {
    countingRequestList-r10         CountingRequestList-r10,
    lateNonCriticalExtension        OCTET STRING                        OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

CountingRequestList-r10 ::= SEQUENCE (SIZE (1..maxServiceCount)) OF CountingRequestInfo-r10

CountingRequestInfo-r10 ::=     SEQUENCE {
    tmgi-r10                            TMGI-r9,
    ...
}

-- ASN1STOP
```

– *MBMSCountingResponse*

The *MBMSCountingResponse* message is used by the UE to respond to an *MBMSCountingRequest* message.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

MBMSCountingResponse message

```
-- ASN1START

MBMSCountingResponse-r10 ::=            SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            countingResponse-r10                MBMSCountingResponse-r10-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

MBMSCountingResponse-r10-IEs ::=    SEQUENCE {
    mbsfn-AreaIndex-r10             INTEGER (0..maxMBSFN-Area-1)                    OPTIONAL,
    countingResponseList-r10        CountingResponseList-r10            OPTIONAL,
    lateNonCriticalExtension        OCTET STRING                        OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

CountingResponseList-r10 ::=        SEQUENCE (SIZE (1..maxServiceCount)) OF CountingResponseInfo-r10

CountingResponseInfo-r10 ::=        SEQUENCE {
    countingResponseService-r10 INTEGER (0..maxServiceCount-1),
    ...
}
```


DAINGEAN_0002024

```
-- ASN1STOP
```

***MBMSCountingResponse* field descriptions**
countingResponseList
List of MBMS services which the UE is receiving or interested to receive. Value 0 for field *countingResponseService* corresponds to the first entry in *countingRequestList* within *MBMSCountingRequest*, value 1 corresponds to the second entry in this list and so on.
mbsfn-AreaIndex
Index of the entry in field *mbsfn-AreaInfoList* within *SystemInformationBlockType13*. Value 0 corresponds to the first entry in *mbsfn-AreaInfoList* within *SystemInformationBlockType13*, value 1 corresponds to the second entry in this list and so on.

– *MBMSInterestIndication*

The *MBMSInterestIndication* message is used to inform E-UTRAN that the UE is receiving/ interested to receive or no longer receiving/ interested to receive MBMS via an MRB or SC-MRB.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

MBMSInterestIndication message

```
-- ASN1START

MBMSInterestIndication-r11 ::=      SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            interestIndication-r11              MBMSInterestIndication-r11-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

MBMSInterestIndication-r11-IEs ::=  SEQUENCE {
    mbms-FreqList-r11                   CarrierFreqListMBMS-r11         OPTIONAL,
    mbms-Priority-r11                   ENUMERATED {true}               OPTIONAL,
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                MBMSInterestIndication-v1310-IEs    OPTIONAL
}

MBMSInterestIndication-v1310-IEs ::=    SEQUENCE {
    mbms-Services-r13                   MBMS-ServiceList-r13                OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

***MBMSInterestIndication* field descriptions**
mbms-FreqList
List of MBMS frequencies on which the UE is receiving or interested to receive MBMS via an MRB or SC-MRB.
mbms-Priority
Indicates whether the UE prioritises MBMS reception above unicast reception. The field is present (i.e. value *true*), if the UE prioritises reception of all listed MBMS frequencies above reception of any of the unicast bearers. Otherwise the field is absent.

DAINGEAN_0002025

– *MBSFNAreaConfiguration*

The *MBSFNAreaConfiguration* message contains the MBMS control information applicable for an MBSFN area. For each MBSFN area included in *SystemInformationBlockType13* E-UTRAN configures an MCCH (i.e. the MCCH identifies the MBSFN area) and signals the *MBSFNAreaConfiguration* message.

Signalling radio bearer: N/A

RLC-SAP: UM

Logical channel: MCCH

Direction: E-UTRAN to UE

MBSFNAreaConfiguration message

```
-- ASN1START

MBSFNAreaConfiguration-r9 ::=       SEQUENCE {
    commonSF-Alloc-r9                   CommonSF-AllocPatternList-r9,
    commonSF-AllocPeriod-r9             ENUMERATED {
                                            rf4, rf8, rf16, rf32, rf64, rf128, rf256},
    pmch-InfoList-r9                    PMCH-InfoList-r9,
    nonCriticalExtension                MBSFNAreaConfiguration-v930-IEs OPTIONAL
}

MBSFNAreaConfiguration-v930-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                MBSFNAreaConfiguration-v1250-IEs        OPTIONAL
}

MBSFNAreaConfiguration-v1250-IEs ::= SEQUENCE {
    pmch-InfoListExt-r12                PMCH-InfoListExt-r12                OPTIONAL,   -- Need OR
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

CommonSF-AllocPatternList-r9 ::=    SEQUENCE (SIZE (1..maxMBSFN-Allocations)) OF MBSFN-
SubframeConfig

-- ASN1STOP
```

***MBSFNAreaConfiguration* field descriptions**
commonSF-Alloc
Indicates the subframes allocated to the MBSFN area. E-UTRAN always sets this field to cover at least the subframes configured by *SystemInformationBlockType13* for this MCCH, regardless of whether any MBMS sessions are ongoing.
commonSF-AllocPeriod
Indicates the period during which resources corresponding with field *commonSF-Alloc* are divided between the (P)MCH that are configured for this MBSFN area. The subframe allocation patterns, as defined by *commonSF-Alloc*, repeat continously during this period. Value rf4 corresponds to 4 radio frames, rf8 corresponds to 8 radio frames and so on. The *commonSF-AllocPeriod* starts in the radio frames for which: SFN mod *commonSF-AllocPeriod* = 0.
pmch-InfoList
EUTRAN may include *pmch-InfoListExt* even if *pmch-InfoList* does not include *maxPMCH-PerMBSFN* entries. EUTRAN configures at most *maxPMCH-PerMBSFN* entries i.e. across *pmch-InfoList* and *pmch-InfoListExt*.

– *MeasurementReport*

The *MeasurementReport* message is used for the indication of measurement results.

DAINGEAN_0002026

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

MeasurementReport message

```
-- ASN1START

MeasurementReport ::=               SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            measurementReport-r8                MeasurementReport-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

MeasurementReport-r8-IEs ::=        SEQUENCE {
    measResults                         MeasResults,
    nonCriticalExtension                MeasurementReport-v8a0-IEs                      OPTIONAL
}

MeasurementReport-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *MobilityFromEUTRACommand*

The *MobilityFromEUTRACommand* message is used to command handover or a cell change from E-UTRA to another RAT (3GPP or non-3GPP), or enhanced CS fallback to CDMA2000 1xRTT.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

MobilityFromEUTRACommand message

```
-- ASN1START

MobilityFromEUTRACommand ::=        SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            mobilityFromEUTRACommand-r8         MobilityFromEUTRACommand-r8-IEs,
            mobilityFromEUTRACommand-r9             MobilityFromEUTRACommand-r9-IEs,
            spare2 NULL, spare1     NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

MobilityFromEUTRACommand-r8-IEs ::= SEQUENCE {
    cs-FallbackIndicator                BOOLEAN,
    purpose                             CHOICE{
        handover                            Handover,
        cellChangeOrder                     CellChangeOrder
    },
    nonCriticalExtension                MobilityFromEUTRACommand-v8a0-IEs   OPTIONAL
```


DAINGEAN_0002027

```
}

MobilityFromEUTRACommand-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                MobilityFromEUTRACommand-v8d0-IEs   OPTIONAL
}

MobilityFromEUTRACommand-v8d0-IEs ::= SEQUENCE {
    bandIndicator                       BandIndicatorGERAN          OPTIONAL,   -- Cond GERAN
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

MobilityFromEUTRACommand-r9-IEs ::= SEQUENCE {
    cs-FallbackIndicator                BOOLEAN,
    purpose                             CHOICE{
        handover                            Handover,
        cellChangeOrder                     CellChangeOrder,
        e-CSFB-r9                           E-CSFB-r9,
        ...
    },
    nonCriticalExtension                MobilityFromEUTRACommand-v930-IEs   OPTIONAL
}

MobilityFromEUTRACommand-v930-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                MobilityFromEUTRACommand-v960-IEs   OPTIONAL
}

MobilityFromEUTRACommand-v960-IEs ::= SEQUENCE {
    bandIndicator                       BandIndicatorGERAN          OPTIONAL,   -- Cond GERAN
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

Handover ::=                        SEQUENCE {
    targetRAT-Type                      ENUMERATED {
                                            utra, geran, cdma2000-1XRTT, cdma2000-HRPD,
                                            spare4, spare3, spare2, spare1, ...},
    targetRAT-MessageContainer          OCTET STRING,
    nas-SecurityParamFromEUTRA          OCTET STRING (SIZE (1))     OPTIONAL,   -- Cond UTRAGERAN
    systemInformation                   SI-OrPSI-GERAN              OPTIONAL    -- Cond PSHO
}

CellChangeOrder ::=             SEQUENCE {
    t304                                ENUMERATED {
                                            ms100, ms200, ms500, ms1000,
                                            ms2000, ms4000, ms8000, ms10000-v1310},
    targetRAT-Type                      CHOICE {
            geran                           SEQUENCE {
                physCellId                      PhysCellIdGERAN,
                carrierFreq                     CarrierFreqGERAN,
                networkControlOrder             BIT STRING (SIZE (2))       OPTIONAL,   -- Need OP
                systemInformation               SI-OrPSI-GERAN              OPTIONAL    -- Need OP
            },
            ...
    }
}

SI-OrPSI-GERAN ::=                  CHOICE {
    si                                  SystemInfoListGERAN,
    psi                                 SystemInfoListGERAN
}

E-CSFB-r9 ::=                       SEQUENCE {
    messageContCDMA2000-1XRTT-r9        OCTET STRING        OPTIONAL,   -- Need ON
    mobilityCDMA2000-HRPD-r9            ENUMERATED {
                                            handover, redirection
                                        }                   OPTIONAL,   -- Need OP
    messageContCDMA2000-HRPD-r9     OCTET STRING        OPTIONAL,   -- Cond concHO
    redirectCarrierCDMA2000-HRPD-r9 CarrierFreqCDMA2000 OPTIONAL    -- Cond concRedir
}

-- ASN1STOP
```


DAINGEAN_0002028

MobilityFromEUTRACommand field descriptions
bandIndicator Indicates how to interpret the ARFCN of the BCCH carrier.
carrierFreq contains the carrier frequency of the target GERAN cell.
cs-FallbackIndicator Value *true* indicates that the CS fallback procedure to UTRAN or GERAN is triggered.
messageContCDMA2000-1XRTT This field contains a message specified in CDMA2000 1xRTT standard that either tells the UE to move to specific 1xRTT target cell(s) or indicates a failure to allocate resources for the enhanced CS fallback to CDMA2000 1xRTT.
messageContCDMA2000-HRPD This field contains a message specified in CDMA2000 HRPD standard that either tells the UE to move to specific HRPD target cell(s) or indicates a failure to allocate resources for the handover to CDMA2000 HRPD.
mobilityCDMA2000-HRPD This field indicates whether or not mobility to CDMA2000 HRPD is to be performed by the UE and it also indicates the type of mobility to CDMA2000 HRPD that is to be performed; If this field is not present the UE shall perform only the enhanced CS fallback to CDMA2000 1xRTT.
nas-SecurityParamFromEUTRA Used to deliver the key synchronisation and Key freshness for the E-UTRAN to UTRAN handovers as specified in TS 33.401. The content of the parameter is defined in TS24.301.
networkControlOrder Parameter NETWORK_CONTROL_ORDER in TS 44.060 [36].
purpose Indicates which type of mobility procedure the UE is requested to perform. EUTRAN always applies value *e-CSFB* in case of enhanced CS fallback to CDMA2000 (e.g. also when that procedure results in handover to CDMA2000 1XRTT only, in handover to CDMA2000 HRPD only or in redirection to CDMA2000 HRPD only),
redirectCarrierCDMA2000-HRPD The *redirectCarrierCDMA2000-HRPD* indicates a CDMA2000 carrier frequency and is used to redirect the UE to a HRPD carrier frequency.
SystemInfoListGERAN If *purpose* = *CellChangeOrder* and if the field is not present, the UE has to acquire SI/PSI from the GERAN cell.
t304 Timer T304 as described in section 7.3. Value ms100 corresponds with 100 ms, ms200 corresponds with 200 ms and so on. EUTRAN includes extended value *ms10000-v1310* only when UE supports CE.
targetRAT-Type Indicates the target RAT type.
targetRAT-MessageContainer The field contains a message specified in another standard, as indicated by the *targetRAT-Type*, and carries information about the target cell identifier(s) and radio parameters relevant for the target radio access technology. NOTE 1. A complete message is included, as specified in the other standard.

Conditional presence	Explanation
concHO	The field is mandatory present if the *mobilityCDMA2000-HRPD* is set to "*handover*"; otherwise the field is optional present, need ON.
concRedir	The field is mandatory present if the m*obilityCDMA2000-HRPD* is set to "*redirection*"; otherwise the field is not present.
GERAN	The field should be present if the *purpose* is set to "*handover*" and the *targetRAT-Type* is set to "*geran*"; otherwise the field is not present
PSHO	The field is mandatory present in case of PS handover toward GERAN; otherwise the field is optionally present, but not used by the UE
UTRAGERAN	The field is mandatory present if the *targetRAT-Type* is set to "*utra*" or "*geran*"; otherwise the field is not present

NOTE 1: The correspondence between the value of the *targetRAT-Type*, the standard to apply and the message contained within the *targetRAT-MessageContainer* is shown in the table below:

DAINGEAN_0002029

targetRAT-Type	Standard to apply	targetRAT-MessageContainer
cdma2000-1XRTT	C.S0001 or later, C.S0007 or later, C.S0008 or later	
cdma2000-HRPD	C.S0024 or later	
geran	GSM TS 04.18, version 8.5.0 or later, or 3GPP TS 44.018 (clause 9.1.15) 3GPP TS 44.060, version 6.13.0 or later (clause 11.2.43) 3GPP TS 44.060, version 7.6.0 or later (clause 11.2.46)	HANDOVER COMMAND PS HANDOVER COMMAND DTM HANDOVER COMMAND
utra	3GPP TS 25.331 (clause 10.2.16a)	HANDOVER TO UTRAN COMMAND

– *Paging*

The *Paging* message is used for the notification of one or more UEs.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: PCCH

Direction: E-UTRAN to UE

Paging message

```
-- ASN1START

Paging ::=                  SEQUENCE {
    pagingRecordList                PagingRecordList                    OPTIONAL,   -- Need ON
    systemInfoModification          ENUMERATED {true}                   OPTIONAL,   -- Need ON
    etws-Indication                 ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension            Paging-v890-IEs                     OPTIONAL
}

Paging-v890-IEs ::=         SEQUENCE {
    lateNonCriticalExtension        OCTET STRING                            OPTIONAL,
    nonCriticalExtension            Paging-v920-IEs                         OPTIONAL
}

Paging-v920-IEs ::=         SEQUENCE {
    cmas-Indication-r9              ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension                Paging-v1130-IEs                OPTIONAL
}

Paging-v1130-IEs ::=            SEQUENCE {
    eab-ParamModification-r11       ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension            Paging-v1310-IEs                    OPTIONAL
}

Paging-v1310-IEs ::=            SEQUENCE {
    redistributionIndication-r13    ENUMERATED {true}                   OPTIONAL,   --Need ON
    systemInfoModification-eDRX-r13 ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

PagingRecordList ::=            SEQUENCE (SIZE (1..maxPageRec)) OF PagingRecord

PagingRecord ::=                SEQUENCE {
    ue-Identity                     PagingUE-Identity,
    cn-Domain                       ENUMERATED  {ps, cs},
    ...
}

PagingUE-Identity ::=           CHOICE {
    s-TMSI                          S-TMSI,
    imsi                            IMSI,
    ...
}

IMSI ::=                        SEQUENCE (SIZE (6..21)) OF IMSI-Digit
```


DAINGEAN_0002030

```
IMSI-Digit ::=                      INTEGER (0..9)

-- ASN1STOP
```

Paging field descriptions
cmas-Indication If present: indication of a CMAS notification.
cn-Domain Indicates the origin of paging.
eab-ParamModification If present: indication of an EAB parameters (SIB14) modification.
etws-Indication If present: indication of an ETWS primary notification and/ or ETWS secondary notification.
imsi The International Mobile Subscriber Identity, a globally unique permanent subscriber identity, see TS 23.003 [27]. The first element contains the first IMSI digit, the second element contains the second IMSI digit and so on.
redistributionIndication If present: indication to trigger E-UTRAN inter-frequency redistribution procedure as specified in TS 36.304 [4, 5.2.4.10]
systemInfoModification If present: indication of a BCCH modification other than SIB10, SIB11, SIB12 and SIB14. This indication does not apply to UEs using eDRX cycle longer than the BCCH modification period.
systemInfoModification-eDRX If present: indication of a BCCH modification other than SIB10, SIB11, SIB12 and SIB14. This indication applies only to UEs using eDRX cycle longer than the BCCH modification period.
ue-Identity Provides the NAS identity of the UE that is being paged.

– *ProximityIndication*

The *ProximityIndication* message is used to indicate that the UE is entering or leaving the proximity of one or more CSG member cell(s).

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

ProximityIndication message

```
-- ASN1START

ProximityIndication-r9 ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            proximityIndication-r9              ProximityIndication-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
            },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

ProximityIndication-r9-IEs ::= SEQUENCE {
    type-r9                             ENUMERATED {entering, leaving},
    carrierFreq-r9                      CHOICE {
        eutra-r9                            ARFCN-ValueEUTRA,
        utra-r9                             ARFCN-ValueUTRA,
        ...,
        eutra2-v9e0                         ARFCN-ValueEUTRA-v9e0
    },
    nonCriticalExtension                ProximityIndication-v930-IEs
    OPTIONAL
}

ProximityIndication-v930-IEs ::= SEQUENCE {
```


DAINGEAN_0002031

```
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***ProximityIndication* field descriptions**
carrierFreq
Indicates the RAT and frequency of the CSG member cell(s), for which the proximity indication is sent. For E-UTRA and UTRA frequencies, the UE shall set the ARFCN according to a band it previously considered suitable for accessing (one of) the CSG member cell(s), for which the proximity indication is sent.
type
Used to indicate whether the UE is entering or leaving the proximity of CSG member cell(s).

– *RNReconfiguration*

The *RNReconfiguration* is a command to modify the RN subframe configuration and/or to convey changed system information.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to RN

RNReconfiguration message

```
-- ASN1START

RNReconfiguration-r10 ::=       SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    criticalExtensions              CHOICE {
        c1                              CHOICE {
            rnReconfiguration-r10           RNReconfiguration-r10-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture        SEQUENCE {}
    }
}

RNReconfiguration-r10-IEs ::=       SEQUENCE {
    rn-SystemInfo-r10               RN-SystemInfo-r10           OPTIONAL,   -- Need ON
    rn-SubframeConfig-r10           RN-SubframeConfig-r10           OPTIONAL,   -- Need ON
    lateNonCriticalExtension        OCTET STRING                    OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                     OPTIONAL
}

RN-SystemInfo-r10 ::=           SEQUENCE {
    systemInformationBlockType1-r10     OCTET STRING (CONTAINING SystemInformationBlockType1)
    OPTIONAL,   -- Need ON
    systemInformationBlockType2-r10     SystemInformationBlockType2     OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```

– *RNReconfigurationComplete*

The *RNReconfigurationComplete* message is used to confirm the successful completion of an RN reconfiguration.

DAINGEAN_0002032

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: RN to E-UTRAN

RNReconfigurationComplete message

```
-- ASN1START

RNReconfigurationComplete-r10 ::=       SEQUENCE {
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    criticalExtensions                      CHOICE {
        c1                                      CHOICE{
            rnReconfigurationComplete-r10           RNReconfigurationComplete-r10-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture                SEQUENCE {}
    }
}

RNReconfigurationComplete-r10-IEs ::=   SEQUENCE {
    lateNonCriticalExtension                OCTET STRING                OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                 OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionReconfiguration*

The *RRCConnectionReconfiguration* message is the command to modify an RRC connection. It may convey information for measurement configuration, mobility control, radio resource configuration (including RBs, MAC main configuration and physical channel configuration) including any associated dedicated NAS information and security configuration.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

RRCConnectionReconfiguration message

```
-- ASN1START

RRCConnectionReconfiguration ::=    SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            rrcConnectionReconfiguration-r8     RRCConnectionReconfiguration-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReconfiguration-r8-IEs ::= SEQUENCE {
    measConfig                          MeasConfig                      OPTIONAL,   -- Need ON
    mobilityControlInfo                 MobilityControlInfo             OPTIONAL,   -- Cond HO
    dedicatedInfoNASList                SEQUENCE (SIZE(1..maxDRB)) OF
                                            DedicatedInfoNAS            OPTIONAL,   -- Cond nonHO
    radioResourceConfigDedicated        RadioResourceConfigDedicated    OPTIONAL, -- Cond HO-toEUTRA
    securityConfigHO                    SecurityConfigHO                OPTIONAL,   -- Cond HO
    nonCriticalExtension                RRCConnectionReconfiguration-v890-IEs   OPTIONAL
}
```


DAINGEAN_0002033

```
RRCConnectionReconfiguration-v890-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING (CONTAINING RRCConnectionReconfiguration-v8m0-
IEs)    OPTIONAL,
    nonCriticalExtension                RRCConnectionReconfiguration-v920-IEs   OPTIONAL
}

-- Late non-critical extensions:
RRCConnectionReconfiguration-v8m0-IEs ::= SEQUENCE {
    -- Following field is only for pre REL-10 late non-critical extensions
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                RRCConnectionReconfiguration-v10i0-IEs      OPTIONAL
}

RRCConnectionReconfiguration-v10i0-IEs ::= SEQUENCE {
    antennaInfoDedicatedPCell-v10i0     AntennaInfoDedicated-v10i0          OPTIONAL,   -- Need ON
    -- Following field is only for late non-critical extensions from REL-10
    nonCriticalExtension                SEQUENCE {}             OPTIONAL
}

-- Regular non-critical extensions:
RRCConnectionReconfiguration-v920-IEs ::= SEQUENCE {
    otherConfig-r9                      OtherConfig-r9                  OPTIONAL,   -- Need ON
    fullConfig-r9                       ENUMERATED {true}               OPTIONAL,   -- Cond HO-
Reestab
    nonCriticalExtension                RRCConnectionReconfiguration-v1020-IEs  OPTIONAL
}

RRCConnectionReconfiguration-v1020-IEs ::= SEQUENCE {
    sCellToReleaseList-r10              SCellToReleaseList-r10          OPTIONAL,   -- Need ON
    sCellToAddModList-r10               SCellToAddModList-r10           OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionReconfiguration-v1130-IEs  OPTIONAL
}

RRCConnectionReconfiguration-v1130-IEs ::= SEQUENCE {
    systemInformationBlockType1Dedicated-r11    OCTET STRING (CONTAINING
SystemInformationBlockType1)
    OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionReconfiguration-v1250-IEs  OPTIONAL
}

RRCConnectionReconfiguration-v1250-IEs ::= SEQUENCE {
    wlan-OffloadInfo-r12                CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            wlan-OffloadConfigDedicated-r12     WLAN-OffloadConfig-r12,
            t350-r12                            ENUMERATED {min5, min10, min20, min30, min60,
                                                 min120, min180, spare1}    OPTIONAL    -- Need OR
        }
    }                                                                       OPTIONAL,       -- Need ON
    scg-Configuration-r12               SCG-Configuration-r12       OPTIONAL,   -- Cond
nonFullConfig
    sl-SyncTxControl-r12                SL-SyncTxControl-r12            OPTIONAL,   -- Need ON
    sl-DiscConfig-r12                   SL-DiscConfig-r12               OPTIONAL,   -- Need ON
    sl-CommConfig-r12                   SL-CommConfig-r12               OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionReconfiguration-v1310-IEs  OPTIONAL
}

RRCConnectionReconfiguration-v1310-IEs ::= SEQUENCE {
    sCellToReleaseListExt-r13           SCellToReleaseListExt-r13       OPTIONAL,   -- Need ON
    sCellToAddModListExt-r13            SCellToAddModListExt-r13        OPTIONAL,   -- Need ON
    lwa-Configuration-r13               LWA-Configuration-r13           OPTIONAL,   -- Need ON
    lwip-Configuration-r13              LWIP-Configuration-r13          OPTIONAL,   -- Need ON
    rclwi-Configuration-r13             RCLWI-Configuration-r13         OPTIONAL,   -- Need ON
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

SL-SyncTxControl-r12 ::=            SEQUENCE {
    networkControlledSyncTx-r12             ENUMERATED {on, off}        OPTIONAL        -- Need OP
}

PSCellToAddMod-r12 ::=              SEQUENCE {
    sCellIndex-r12                      SCellIndex-r10,
    cellIdentification-r12              SEQUENCE {
        physCellId-r12                      PhysCellId,
        dl-CarrierFreq-r12                  ARFCN-ValueEUTRA-r9
    }                                                                   OPTIONAL,   -- Cond SCellAdd
    radioResourceConfigCommonPSCell-r12     RadioResourceConfigCommonPSCell-r12 OPTIONAL,   -- Cond
SCellAdd
```


DAINGEAN_0002034

```
    radioResourceConfigDedicatedPSCell-r12  RadioResourceConfigDedicatedPSCell-r12  OPTIONAL,   --
Cond SCellAdd2
    ...,
    [[  antennaInfoDedicatedPSCell-v1280        AntennaInfoDedicated-v10i0  OPTIONAL    -- Need ON
    ]],
    [[  sCellIndex-r13                  SCellIndex-r13  OPTIONAL        -- Need ON
    ]]
}

PowerCoordinationInfo-r12 ::= SEQUENCE {
    p-MeNB-r12                          INTEGER (1..16),
    p-SeNB-r12                          INTEGER (1..16),
    powerControlMode-r12                INTEGER (1..2)
}

SCellToAddModList-r10 ::=       SEQUENCE (SIZE (1..maxSCell-r10)) OF SCellToAddMod-r10

SCellToAddModListExt-r13 ::=    SEQUENCE (SIZE (1..maxSCell-r13)) OF SCellToAddModExt-r13

SCellToAddMod-r10 ::=           SEQUENCE {
    sCellIndex-r10                      SCellIndex-r10,
    cellIdentification-r10              SEQUENCE {
        physCellId-r10                      PhysCellId,
        dl-CarrierFreq-r10                  ARFCN-ValueEUTRA
    }                                                                   OPTIONAL,   -- Cond SCellAdd
    radioResourceConfigCommonSCell-r10      RadioResourceConfigCommonSCell-r10  OPTIONAL,   -- Cond
SCellAdd
    radioResourceConfigDedicatedSCell-r10   RadioResourceConfigDedicatedSCell-r10   OPTIONAL,   --
Cond SCellAdd2
    ...,
    [[  dl-CarrierFreq-v1090                ARFCN-ValueEUTRA-v9e0   OPTIONAL    -- Cond EARFCN-max
    ]],
    [[  antennaInfoDedicatedSCell-v10i0     AntennaInfoDedicated-v10i0  OPTIONAL    -- Need ON
    ]]
}

SCellToAddModExt-r13 ::=            SEQUENCE {
    sCellIndex-r13                      SCellIndex-r13,
    cellIdentification-r13              SEQUENCE {
        physCellId-r13                      PhysCellId,
        dl-CarrierFreq-r13                  ARFCN-ValueEUTRA-r9
    }                                                               OPTIONAL,   -- Cond SCellAdd
    radioResourceConfigCommonSCell-r13      RadioResourceConfigCommonSCell-r10  OPTIONAL,   -- Cond
SCellAdd
    radioResourceConfigDedicatedSCell-r13   RadioResourceConfigDedicatedSCell-r10   OPTIONAL,   --
Cond SCellAdd2
    antennaInfoDedicatedSCell-r13           AntennaInfoDedicated-v10i0      OPTIONAL    -- Need ON
}

SCellToReleaseList-r10 ::=          SEQUENCE (SIZE (1..maxSCell-r10)) OF SCellIndex-r10

SCellToReleaseListExt-r13 ::=           SEQUENCE (SIZE (1..maxSCell-r13)) OF SCellIndex-r13

SCG-Configuration-r12 ::=           CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        scg-ConfigPartMCG-r12               SEQUENCE {
            scg-Counter-r12                     INTEGER (0.. 65535)         OPTIONAL,   -- Need ON
            powerCoordinationInfo-r12           PowerCoordinationInfo-r12   OPTIONAL,   -- Need ON
            ...
        }                                                               OPTIONAL,   -- Need ON
        scg-ConfigPartSCG-r12               SCG-ConfigPartSCG-r12       OPTIONAL    -- Need ON
    }
}

SCG-ConfigPartSCG-r12 ::=           SEQUENCE {
    radioResourceConfigDedicatedSCG-r12 RadioResourceConfigDedicatedSCG-r12 OPTIONAL,   -- Need ON
    sCellToReleaseListSCG-r12           SCellToReleaseList-r10      OPTIONAL,   -- Need ON
    pSCellToAddMod-r12                  PSCellToAddMod-r12          OPTIONAL,   -- Need ON
    sCellToAddModListSCG-r12            SCellToAddModList-r10       OPTIONAL,   -- Need ON
    mobilityControlInfoSCG-r12          MobilityControlInfoSCG-r12  OPTIONAL,   -- Need ON
    ...,
    [[
    sCellToReleaseListSCG-Ext-r13           SCellToReleaseListExt-r13       OPTIONAL,   -- Need ON
    sCellToAddModListSCG-Ext-r13                SCellToAddModListExt-r13    OPTIONAL    -- Need ON
    ]]
}
```


DAINGEAN_0002035

```
SecurityConfigHO ::=                SEQUENCE {
    handoverType                        CHOICE {
        intraLTE                            SEQUENCE {
            securityAlgorithmConfig             SecurityAlgorithmConfig     OPTIONAL,   -- Cond
fullConfig
            keyChangeIndicator                  BOOLEAN,
            nextHopChainingCount                NextHopChainingCount
        },
        interRAT                            SEQUENCE {
            securityAlgorithmConfig             SecurityAlgorithmConfig,
            nas-SecurityParamToEUTRA            OCTET STRING (SIZE(6))
        }
    },
    ...
}

-- ASN1STOP
```


DAINGEAN_0002036

RRCConnectionReconfiguration field descriptions
dedicatedInfoNASList
This field is used to transfer UE specific NAS layer information between the network and the UE. The RRC layer is transparent for each PDU in the list.
fullConfig
Indicates the full configuration option is applicable for the RRC Connection Reconfiguration message.
keyChangeIndicator
true is used only in an intra-cell handover when a K_{eNB} key is derived from a K_{ASME} key taken into use through the latest successful NAS SMC procedure, as described in TS 33.401 [32] for K_{eNB} re-keying. false is used in an intra-LTE handover when the new K_{eNB} key is obtained from the current K_{eNB} key or from the NH as described in TS 33.401 [32].
lwa-Configuration
This field is used to provide parameters for LWA configuration. E-UTRAN does not simultaneously configure LWA and DC for a UE.
lwip-Configuration
This field is used to provide parameters for LWIP configuration.
nas-securityParamToEUTRA
This field is used to transfer UE specific NAS layer information between the network and the UE. The RRC layer is transparent for this field, although it affects activation of AS- security after inter-RAT handover to E-UTRA. The content is defined in TS 24.301.
networkControlledSyncTx
This field indicates whether the UE shall transmit synchronisation information (i.e. become synchronisation source). Value *On* indicates the UE to transmit synchronisation information while value *Off* indicates the UE to not transmit such information.
nextHopChainingCount
Parameter NCC: See TS 33.401 [32]
p-MeNB
Indicates the guaranteed power for the MeNB, as specified in TS 36.213 [23]. The value N corresponds to N-1 in TS 36.213 [23].
powerControlMode
Indicates the power control mode used in DC. Value 1 corresponds to DC power control mode 1 and value 2 indicates DC power control mode 2, as specified in TS 36.213 [23].
p-SeNB
Indicates the guaranteed power for the SeNB as specified in TS 36.213 [23, Table 5.1.4.2-1]. The value N corresponds to N-1 in TS 36.213 [23].
rclwi-Configuration
WLAN traffic steering command as specified in 5.6.16.2.
sCellIndex
In case of DC, the SCellIndex is unique within the scope of the UE i.e. an SCG cell can not use the same value as used for an MCG cell. For *pSCellToAddMod*, if *sCellIndex-r13* is present the UE shall ignore *sCellIndex-r12*. *sCellIndex-r13* in *sCellToAddModListExt-r13* shall not have same values as sCellIndex-r10 in sCellToAddModList-r10.
sCellToAddModList, sCellToAddModListExt
Indicates the SCell to be added or modified. Field *sCellToAddModList* is used to add the first 4 SCells with *sCellIndex-r10* while *sCellToAddModListExt* is used to add the rest.
sCellToAddModListSCG, sCellToAddModListSCG-Ext
Indicates the SCG cell to be added or modified. The field is used for SCG cells other than the PSCell (which is added/ modified by field *pSCellToAddMod*). Field *sCellToAddModListSCG* is used to add the first 4 SCells with *sCellIndex-r10* while *sCellToAddModListSCG-Ext* is used to add the rest.
sCellToReleaseListSCG, sCellToReleaseListSCG-Ext
Indicates the SCG cell to be released. The field is also used to release the PSCell e.g. upon change of PSCell, upon system information change for the PSCell.
scg-Counter
A counter used upon initial configuration of SCG security as well as upon refresh of S-K_{eNB}. E-UTRAN includes the field upon SCG change when one or more SCG DRBs are configured. Otherwise E-UTRAN does not include the field.
t350
Timer T350 as described in section 7.3. Value *minN* corresponds to N minutes.

DAINGEAN_0002037

Conditional presence	Explanation
EARFCN-max	The field is mandatory present if *dl-CarrierFreq-r10* is included and set to *maxEARFCN*. Otherwise the field is not present.
fullConfig	This field is mandatory present for handover within E-UTRA when the *fullConfig* is included; otherwise it is optionally present, Need OP.
HO	The field is mandatory present in case of handover within E-UTRA or to E-UTRA; otherwise the field is not present.
HO-Reestab	This field is optionally present, need ON, in case of handover within E-UTRA or upon the first reconfiguration after RRC connection re-establishment; otherwise the field is not present.
HO-toEUTRA	The field is mandatory present in case of handover to E-UTRA or for reconfigurations when *fullConfig* is included; otherwise the field is optionally present, need ON.
nonFullConfig	The field is not present when the *fullConfig* is included or in case of handover to E-UTRA; otherwise it is optional present, need ON.
nonHO	The field is not present in case of handover within E-UTRA or to E-UTRA; otherwise it is optional present, need ON.
SCellAdd	The field is mandatory present upon SCell addition; otherwise it is not present.
SCellAdd2	The field is mandatory present upon SCell addition; otherwise it is optionally present, need ON.

– *RRCConnectionReconfigurationComplete*

The *RRCConnectionReconfigurationComplete* message is used to confirm the successful completion of an RRC connection reconfiguration.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionReconfigurationComplete message

```
-- ASN1START

RRCConnectionReconfigurationComplete ::= SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        rrcConnectionReconfigurationComplete-r8
                                            RRCConnectionReconfigurationComplete-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReconfigurationComplete-r8-IEs ::= SEQUENCE {
    nonCriticalExtension                RRCConnectionReconfigurationComplete-v8a0-IEs   OPTIONAL
}

RRCConnectionReconfigurationComplete-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                RRCConnectionReconfigurationComplete-v1020-IEs  OPTIONAL
}

RRCConnectionReconfigurationComplete-v1020-IEs ::= SEQUENCE {
    r1f-InfoAvailable-r10               ENUMERATED {true}               OPTIONAL,
    logMeasAvailable-r10                ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionReconfigurationComplete-v1130-IEs  OPTIONAL
}

RRCConnectionReconfigurationComplete-v1130-IEs ::= SEQUENCE {
    connEstFailInfoAvailable-r11        ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionReconfigurationComplete-v1250-IEs  OPTIONAL
}

RRCConnectionReconfigurationComplete-v1250-IEs ::= SEQUENCE {
    logMeasAvailableMBSFN-r12           ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}
```


DAINGEAN_0002038

```
-- ASN1STOP
```

– *RRCConnectionReestablishment*

The *RRCConnectionReestablishment* message is used to re-establish SRB1.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionReestablishment message

```
-- ASN1START

RRCConnectionReestablishment ::=    SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            rrcConnectionReestablishment-r8     RRCConnectionReestablishment-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4    NULL,
            spare3 NULL, spare2 NULL, spare1    NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReestablishment-r8-IEs ::= SEQUENCE {
    radioResourceConfigDedicated       RadioResourceConfigDedicated,
    nextHopChainingCount               NextHopChainingCount,
    nonCriticalExtension               RRCConnectionReestablishment-v8a0-IEs   OPTIONAL
}

RRCConnectionReestablishment-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension           OCTET STRING                        OPTIONAL,
    nonCriticalExtension               SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionReestablishmentComplete*

The *RRCConnectionReestablishmentComplete* message is used to confirm the successful completion of an RRC connection reestablishment.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionReestablishmentComplete message

```
-- ASN1START

RRCConnectionReestablishmentComplete ::= SEQUENCE {
    rrc-TransactionIdentifier          RRC-TransactionIdentifier,
    criticalExtensions                 CHOICE {
        rrcConnectionReestablishmentComplete-r8
                                           RRCConnectionReestablishmentComplete-r8-IEs,
        criticalExtensionsFuture           SEQUENCE {}
    }
```


DAINGEAN_0002039

```
}

RRCConnectionReestablishmentComplete-r8-IEs ::= SEQUENCE {
    nonCriticalExtension                RRCConnectionReestablishmentComplete-v920-IEs   OPTIONAL
}

RRCConnectionReestablishmentComplete-v920-IEs ::= SEQUENCE {
    rlf-InfoAvailable-r9                ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionReestablishmentComplete-v8a0-IEs   OPTIONAL
}

RRCConnectionReestablishmentComplete-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                RRCConnectionReestablishmentComplete-v1020-IEs  OPTIONAL
}

RRCConnectionReestablishmentComplete-v1020-IEs ::= SEQUENCE {
    logMeasAvailable-r10                ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionReestablishmentComplete-v1130-IEs  OPTIONAL
}

RRCConnectionReestablishmentComplete-v1130-IEs ::= SEQUENCE {
    connEstFailInfoAvailable-r11        ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionReestablishmentComplete-v1250-IEs  OPTIONAL
}

RRCConnectionReestablishmentComplete-v1250-IEs ::= SEQUENCE {
    logMeasAvailableMBSFN-r12           ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

***RRCConnectionReestablishmentComplete* field descriptions**
rlf-InfoAvailable
This field is used to indicate the availability of radio link failure or handover failure related measurements

– *RRCConnectionReestablishmentReject*

The *RRCConnectionReestablishmentReject* message is used to indicate the rejection of an RRC connection reestablishment request.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionReestablishmentReject message

```
-- ASN1START

RRCConnectionReestablishmentReject ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        rrcConnectionReestablishmentReject-r8
                                            RRCConnectionReestablishmentReject-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReestablishmentReject-r8-IEs ::= SEQUENCE {
    nonCriticalExtension                RRCConnectionReestablishmentReject-v8a0-IEs OPTIONAL
}

RRCConnectionReestablishmentReject-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```


DAINGEAN_0002040

– *RRCConnectionReestablishmentRequest*

The *RRCConnectionReestablishmentRequest* message is used to request the reestablishment of an RRC connection.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

RRCConnectionReestablishmentRequest message

```
-- ASN1START

RRCConnectionReestablishmentRequest ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        rrcConnectionReestablishmentRequest-r8
                                            RRCConnectionReestablishmentRequest-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReestablishmentRequest-r8-IEs ::= SEQUENCE {
    ue-Identity                         ReestabUE-Identity,
    reestablishmentCause                ReestablishmentCause,
    spare                               BIT STRING (SIZE (2))
}

ReestabUE-Identity ::=              SEQUENCE {
    c-RNTI                              C-RNTI,
    physCellId                          PhysCellId,
    shortMAC-I                          ShortMAC-I
}

ReestablishmentCause ::=            ENUMERATED {
                                        reconfigurationFailure, handoverFailure,
                                        otherFailure, spare1}

-- ASN1STOP
```

RRCConnectionReestablishmentRequest field descriptions
physCellId   The Physical Cell Identity of the PCell the UE was connected to prior to the failure.
reestablishmentCause   Indicates the failure cause that triggered the re-establishment procedure. eNB is not expected to reject a *RRCConnectionReestablishmentRequest* due to unknown cause value being used by the UE.
ue-Identity   UE identity included to retrieve UE context and to facilitate contention resolution by lower layers.

– *RRCConnectionReject*

The *RRCConnectionReject* message is used to reject the RRC connection establishment.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionReject message

```
-- ASN1START
```


DAINGEAN_0002041

```
RRCConnectionReject ::=             SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionReject-r8              RRCConnectionReject-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReject-r8-IEs ::=      SEQUENCE {
    waitTime                            INTEGER (1..16),
    nonCriticalExtension                RRCConnectionReject-v8a0-IEs        OPTIONAL
}

RRCConnectionReject-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                RRCConnectionReject-v1020-IEs       OPTIONAL
}

RRCConnectionReject-v1020-IEs ::=   SEQUENCE {
    extendedWaitTime-r10                INTEGER (1..1800)                   OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionReject-v1130-IEs       OPTIONAL
}

RRCConnectionReject-v1130-IEs ::=   SEQUENCE {
    deprioritisationReq-r11             SEQUENCE {
        deprioritisationType-r11            ENUMERATED {frequency, e-utra},
        deprioritisationTimer-r11           ENUMERATED {min5, min10, min15, min30}
    }                                                                       OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionReject-v1320-IEs
    OPTIONAL
}

RRCConnectionReject-v1320-IEs ::=   SEQUENCE {
    rrc-SuspendIndication-r13           ENUMERATED {true}                   OPTIONAL,   --  Need ON
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***RRCConnectionReject* field descriptions**
deprioritisationReq   Indicates whether the current frequency or RAT is to be de-prioritised. The UE shall be able to store a depriotisation request for up to 8 frequencies (applicable when receiving another frequency specific deprioritisation request before T325 expiry).
deprioritisationTimer   Indicates the period for which either the current carrier frequency or E-UTRA is deprioritised. Value *minN* corresponds to N minutes.
extendedWaitTime   Value in seconds for the wait time for Delay Tolerant access requests.
rrc-SuspendIndication   If present, this field indicates that the UE should remain suspended and not release its stored context.
waitTime   Wait time value in seconds.

– *RRCConnectionRelease*

The *RRCConnectionRelease* message is used to command the release of an RRC connection.

DAINGEAN_0002042

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

RRCConnectionRelease message

```
-- ASN1START

RRCConnectionRelease ::=            SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionRelease-r8             RRCConnectionRelease-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionRelease-r8-IEs ::=     SEQUENCE {
    releaseCause                        ReleaseCause,
    redirectedCarrierInfo               RedirectedCarrierInfo               OPTIONAL,   -- Need ON
    idleModeMobilityControlInfo         IdleModeMobilityControlInfo         OPTIONAL,   -- Need OP
    nonCriticalExtension                RRCConnectionRelease-v890-IEs       OPTIONAL
}

RRCConnectionRelease-v890-IEs ::=   SEQUENCE {
    lateNonCriticalExtension            OCTET STRING (CONTAINING RRCConnectionRelease-v9e0-IEs)
    OPTIONAL,
    nonCriticalExtension                RRCConnectionRelease-v920-IEs       OPTIONAL
}

-- Late non critical extensions
RRCConnectionRelease-v9e0-IEs ::= SEQUENCE {
    redirectedCarrierInfo-v9e0          RedirectedCarrierInfo-v9e0          OPTIONAL,   -- Cond
NoRedirect-r8
    idleModeMobilityControlInfo-v9e0    IdleModeMobilityControlInfo-v9e0    OPTIONAL,   -- Cond
IdleInfoEUTRA
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- Regular non critical extensions
RRCConnectionRelease-v920-IEs ::=   SEQUENCE {
    cellInfoList-r9                     CHOICE {
        geran-r9                            CellInfoListGERAN-r9,
        utra-FDD-r9                         CellInfoListUTRA-FDD-r9,
        utra-TDD-r9                         CellInfoListUTRA-TDD-r9,
        ...,
        utra-TDD-r10                        CellInfoListUTRA-TDD-r10
    }                                                           OPTIONAL,   -- Cond Redirection
    nonCriticalExtension                RRCConnectionRelease-v1020-IEs      OPTIONAL
}

RRCConnectionRelease-v1020-IEs ::=  SEQUENCE {
    extendedWaitTime-r10                INTEGER (1..1800)       OPTIONAL,   -- Need ON
    nonCriticalExtension                RRCConnectionRelease-v1320-IEs              OPTIONAL
}

RRCConnectionRelease-v1320-IEs::=   SEQUENCE {
    resumeIdentity-r13                  ResumeIdentity-r13              OPTIONAL,   -- Need OR
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

ReleaseCause ::=                ENUMERATED {loadBalancingTAUrequired,
                                            other, cs-FallbackHighPriority-v1020, rrc-Suspend-v1320}

RedirectedCarrierInfo ::=           CHOICE {
    eutra                               ARFCN-ValueEUTRA,
    geran                               CarrierFreqsGERAN,
    utra-FDD                            ARFCN-ValueUTRA,
    utra-TDD                            ARFCN-ValueUTRA,
    cdma2000-HRPD                       CarrierFreqCDMA2000,
    cdma2000-1xRTT                      CarrierFreqCDMA2000,
```


DAINGEAN_0002043

```
    ...,
    utra-TDD-r10                        CarrierFreqListUTRA-TDD-r10
}

RedirectedCarrierInfo-v9e0 ::=          SEQUENCE {
    eutra-v9e0                              ARFCN-ValueEUTRA-v9e0
}

CarrierFreqListUTRA-TDD-r10 ::=         SEQUENCE (SIZE (1..maxFreqUTRA-TDD-r10)) OF ARFCN-ValueUTRA

IdleModeMobilityControlInfo ::=     SEQUENCE {
    freqPriorityListEUTRA               FreqPriorityListEUTRA           OPTIONAL,       -- Need ON
    freqPriorityListGERAN               FreqsPriorityListGERAN          OPTIONAL,       -- Need ON
    freqPriorityListUTRA-FDD            FreqPriorityListUTRA-FDD        OPTIONAL,       -- Need ON
    freqPriorityListUTRA-TDD            FreqPriorityListUTRA-TDD        OPTIONAL,       -- Need ON
    bandClassPriorityListHRPD           BandClassPriorityListHRPD       OPTIONAL,       -- Need ON
    bandClassPriorityList1XRTT          BandClassPriorityList1XRTT      OPTIONAL,       -- Need ON
    t320                                ENUMERATED {
                                            min5, min10, min20, min30, min60, min120, min180,
                                            spare1}                     OPTIONAL,       -- Need OR
    ...,
    [[  freqPriorityListExtEUTRA-r12        FreqPriorityListExtEUTRA-r12        OPTIONAL        --
Need ON
    ]],
    [[  freqPriorityListEUTRA-v1310         FreqPriorityListEUTRA-v1310         OPTIONAL,       --
Need ON
        freqPriorityListExtEUTRA-v1310      FreqPriorityListExtEUTRA-v1310      OPTIONAL        --
Need ON
    ]]
}

IdleModeMobilityControlInfo-v9e0 ::=    SEQUENCE {
    freqPriorityListEUTRA-v9e0          SEQUENCE (SIZE (1..maxFreq)) OF FreqPriorityEUTRA-v9e0
}

FreqPriorityListEUTRA ::=           SEQUENCE (SIZE (1..maxFreq)) OF FreqPriorityEUTRA

FreqPriorityListExtEUTRA-r12 ::=        SEQUENCE (SIZE (1..maxFreq)) OF FreqPriorityEUTRA-r12

FreqPriorityListEUTRA-v1310 ::=         SEQUENCE (SIZE (1..maxFreq)) OF FreqPriorityEUTRA-v1310

FreqPriorityListExtEUTRA-v1310 ::=      SEQUENCE (SIZE (1..maxFreq)) OF FreqPriorityEUTRA-v1310

FreqPriorityEUTRA ::=               SEQUENCE {
    carrierFreq                         ARFCN-ValueEUTRA,
    cellReselectionPriority             CellReselectionPriority
}

FreqPriorityEUTRA-v9e0 ::=          SEQUENCE {
    carrierFreq-v9e0                    ARFCN-ValueEUTRA-v9e0       OPTIONAL    -- Cond EARFCN-max
}

FreqPriorityEUTRA-r12 ::=               SEQUENCE {
    carrierFreq-r12                         ARFCN-ValueEUTRA-r9,
    cellReselectionPriority-r12             CellReselectionPriority
}

FreqPriorityEUTRA-v1310 ::=             SEQUENCE {
    cellReselectionSubPriority-r13              CellReselectionSubPriority-r13      OPTIONAL      --
Need ON
}

FreqsPriorityListGERAN ::=          SEQUENCE (SIZE (1..maxGNFG)) OF FreqsPriorityGERAN

FreqsPriorityGERAN ::=              SEQUENCE {
    carrierFreqs                        CarrierFreqsGERAN,
    cellReselectionPriority             CellReselectionPriority
}

FreqPriorityListUTRA-FDD ::=        SEQUENCE (SIZE (1..maxUTRA-FDD-Carrier)) OF FreqPriorityUTRA-FDD

FreqPriorityUTRA-FDD ::=            SEQUENCE {
    carrierFreq                         ARFCN-ValueUTRA,
    cellReselectionPriority             CellReselectionPriority
}

FreqPriorityListUTRA-TDD ::=        SEQUENCE (SIZE (1..maxUTRA-TDD-Carrier)) OF FreqPriorityUTRA-TDD
```


DAINGEAN_0002044

```
FreqPriorityUTRA-TDD ::=            SEQUENCE {
    carrierFreq                         ARFCN-ValueUTRA,
    cellReselectionPriority             CellReselectionPriority
}

BandClassPriorityListHRPD ::=       SEQUENCE (SIZE (1..maxCDMA-BandClass)) OF BandClassPriorityHRPD

BandClassPriorityHRPD ::=           SEQUENCE {
    bandClass                           BandclassCDMA2000,
    cellReselectionPriority             CellReselectionPriority
}

BandClassPriorityList1XRTT ::=  SEQUENCE (SIZE (1..maxCDMA-BandClass)) OF BandClassPriority1XRTT

BandClassPriority1XRTT ::=          SEQUENCE {
    bandClass                           BandclassCDMA2000,
    cellReselectionPriority             CellReselectionPriority
}

CellInfoListGERAN-r9 ::=        SEQUENCE (SIZE (1..maxCellInfoGERAN-r9)) OF CellInfoGERAN-r9

CellInfoGERAN-r9 ::=                SEQUENCE {
    physCellId-r9                       PhysCellIdGERAN,
    carrierFreq-r9                      CarrierFreqGERAN,
    systemInformation-r9                SystemInfoListGERAN
}

CellInfoListUTRA-FDD-r9 ::=         SEQUENCE (SIZE (1..maxCellInfoUTRA-r9)) OF CellInfoUTRA-FDD-r9

CellInfoUTRA-FDD-r9 ::=             SEQUENCE {
    physCellId-r9                       PhysCellIdUTRA-FDD,
    utra-BCCH-Container-r9              OCTET STRING
}

CellInfoListUTRA-TDD-r9 ::=         SEQUENCE (SIZE (1..maxCellInfoUTRA-r9)) OF CellInfoUTRA-TDD-r9

CellInfoUTRA-TDD-r9 ::=             SEQUENCE {
    physCellId-r9                       PhysCellIdUTRA-TDD,
    utra-BCCH-Container-r9              OCTET STRING
}

CellInfoListUTRA-TDD-r10 ::=        SEQUENCE (SIZE (1..maxCellInfoUTRA-r9)) OF CellInfoUTRA-TDD-r10

CellInfoUTRA-TDD-r10 ::=            SEQUENCE {
    physCellId-r10                      PhysCellIdUTRA-TDD,
    carrierFreq-r10                     ARFCN-ValueUTRA,
    utra-BCCH-Container-r10             OCTET STRING
}

-- ASN1STOP
```


DAINGEAN_0002045

***RRCConnectionRelease* field descriptions**
carrierFreq or bandClass The carrier frequency (UTRA and E-UTRA) and band class (HRPD and 1xRTT) for which the associated cellReselectionPriority is applied.
carrierFreqs The list of GERAN carrier frequencies organised into one group of GERAN carrier frequencies.
cellInfoList Used to provide system information of one or more cells on the redirected inter-RAT carrier frequency. The system information can be used if, upon redirection, the UE selects an inter-RAT cell indicated by the *physCellId* and *carrierFreq* (GERAN and UTRA TDD) or by the *physCellId* (other RATs). The choice shall match the *redirectedCarrierInfo*. In particular, E-UTRAN only applies value *utra-TDD-r10* in case *redirectedCarrierInfo* is set to *utra-TDD-r10*.
extendedWaitTime Value in seconds for the wait time for Delay Tolerant access requests.
freqPriorityListX Provides a cell reselection priority for each frequency, by means of separate lists for each RAT (including E-UTRA). The UE shall be able to store at least 3 occurrences of *FreqsPriorityGERAN*. If E-UTRAN includes *freqPriorityListEUTRA-v9e0* and/or *freqPriorityListEUTRA-v1310* it includes the same number of entries, and listed in the same order, as in *freqPriorityListEUTRA* (i.e. without suffix). Field *freqPriorityListExt* includes additional neighbouring inter-frequencies, i.e. extending the size of the inter-frequency carrier list using the general principles specified in 5.1.2. EUTRAN only includes *freqPriorityListExtEUTRA* if *freqPriorityListEUTRA* (i.e without suffix) includes *maxFreq* entries. If E-UTRAN includes *freqPriorityListExtEUTRA-v1310* it includes the same number of entries, and listed in the same order, as in *freqPriorityListExtEUTRA-r12*.
idleModeMobilityControlInfo Provides dedicated cell reselection priorities. Used for cell reselection as specified in TS 36.304 [4]. For E-UTRA and UTRA frequencies, a UE that supports multi-band cells for the concerned RAT considers the dedicated priorities to be common for all overlapping bands (i.e. regardless of the ARFCN that is used).
redirectedCarrierInfo The r*edirectedCarrierInfo* indicates a carrier frequency (downlink for FDD) and is used to redirect the UE to an E-UTRA or an inter-RAT carrier frequency, by means of the cell selection upon leaving RRC_CONNECTED as specified in TS 36.304 [4].
releaseCause The *releaseCause* is used to indicate the reason for releasing the RRC Connection. The cause value *cs-FallbackHighPriority* is only applicable when *redirectedCarrierInfo* is present with the value set to *utra-FDD, utra-TDD* or *utra-TDD-r10*. E-UTRAN should not set the *releaseCause* to *loadBalancingTAURequired* or to *cs-FallbackHighPriority* if the *extendedWaitTime* is present.
systemInformation Container for system information of the GERAN cell i.e. one or more System Information (SI) messages as defined in TS 44.018 [45, table 9.1.1].
t320 Timer T320 as described in section 7.3. Value minN corresponds to N minutes.
utra-BCCH-Container Contains System Information Container message as defined in TS 25.331 [19].

Conditional presence	Explanation
EARFCN-max	The field is mandatory present if the corresponding *carrierFreq* (i.e. without suffix) is set to *maxEARFCN*. Otherwise the field is not present.
IdleInfoEUTRA	The field is optionally present, need OP, if the *IdleModeMobilityControlInfo* (i.e. without suffix) is included and includes *freqPriorityListEUTRA*; otherwise the field is not present.
NoRedirect-r8	The field is optionally present, need OP, if the *redirectedCarrierInfo* (i.e. without suffix) is not included; otherwise the field is not present.
Redirection	The field is optionally present, need ON, if the *redirectedCarrierInfo* is included and set to *geran*, *utra-FDD*, *utra-TDD* or *utra-TDD-r10*; otherwise the field is not present.

– *RRCConnectionRequest*

The *RRCConnectionRequest* message is used to request the establishment of an RRC connection.

DAINGEAN_0002046

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

RRCConnectionRequest message

```
-- ASN1START

RRCConnectionRequest ::=            SEQUENCE {
    criticalExtensions                  CHOICE {
        rrcConnectionRequest-r8             RRCConnectionRequest-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionRequest-r8-IEs ::=     SEQUENCE {
    ue-Identity                         InitialUE-Identity,
    establishmentCause                  EstablishmentCause,
    spare                               BIT STRING (SIZE (1))
}

InitialUE-Identity ::=              CHOICE {
    s-TMSI                              S-TMSI,
    randomValue                         BIT STRING (SIZE (40))
}

EstablishmentCause ::=              ENUMERATED {
                                        emergency, highPriorityAccess, mt-Access, mo-Signalling,
                                        mo-Data, delayTolerantAccess-v1020, mo-VoiceCall-v1280,
spare1}

-- ASN1STOP
```

***RRCConnectionRequest* field descriptions**
establishmentCause
Provides the establishment cause for the RRC connection request as provided by the upper layers. W.r.t. the cause value names: highPriorityAccess concerns AC11..AC15, 'mt' stands for 'Mobile Terminating' and 'mo' for 'Mobile Originating. eNB is not expected to reject a *RRCConnectionRequest* due to unknown cause value being used by the UE.
randomValue
Integer value in the range 0 to $2^{40} - 1$.
ue-Identity
UE identity included to facilitate contention resolution by lower layers.

– *RRCConnectionResume*

The *RRCConnectionResume* message is used to resume the suspended RRC connection.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

***RRCConnectionResume* message**

```
-- ASN1START

RRCConnectionResume-r13 ::=     SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionResume-r13             RRCConnectionResume-r13-IEs,
```


DAINGEAN_0002047

```
            spare3                                  NULL,
            spare2                                  NULL,
            spare1                                  NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionResume-r13-IEs ::=     SEQUENCE {
    radioResourceConfigDedicated-r13        RadioResourceConfigDedicated    OPTIONAL,   -- Need ON
    nextHopChainingCount-r13                NextHopChainingCount,
    measConfig-r13                          MeasConfig                      OPTIONAL,   -- Need ON
    antennaInfoDedicatedPCell-r13           AntennaInfoDedicated-v10i0      OPTIONAL,   -- Need ON
    drb-ContinueROHC-r13                    ENUMERATED {true}               OPTIONAL,   -- Need OP
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

RRCConnectionResume field descriptions

drb-ContinueROHC
This field indicates whether to continue or reset the header compression protocol context for the DRBs configured with the header compression protocol. Presence of the field indicates that the header compression protocol context continues while absence indicates that the header compression protocol context is reset.

– *RRCConnectionResumeComplete*

The *RRCConnectionResumeComplete* message is used to confirm the successful completion of an RRC connection resumption

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionResumeComplete message

```
-- ASN1START

RRCConnectionResumeComplete-r13 ::= SEQUENCE {
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    criticalExtensions                          CHOICE {
        rrcConnectionResumeComplete-r13             RRCConnectionResumeComplete-r13-IEs,
        criticalExtensionsFuture                    SEQUENCE {}
    }
}

RRCConnectionResumeComplete-r13-IEs ::= SEQUENCE {
    selectedPLMN-Identity-r13           INTEGER (1..maxPLMN-r11)                OPTIONAL,
    dedicatedInfoNAS-r13                DedicatedInfoNAS                        OPTIONAL,
    rlf-InfoAvailable-r13               ENUMERATED {true}                       OPTIONAL,
    logMeasAvailable-r13                ENUMERATED {true}                       OPTIONAL,
    connEstFailInfoAvailable-r13        ENUMERATED {true}                       OPTIONAL,
    mobilityState-r13                   ENUMERATED {normal, medium, high, spare}    OPTIONAL,
    mobilityHistoryAvail-r13            ENUMERATED {true}                       OPTIONAL,
    logMeasAvailableMBSFN-r13           ENUMERATED {true}                       OPTIONAL,
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionResumeRequest*

The *RRCConnectionResumeRequest* message is used to request the resumption of a suspended RRC connection.

DAINGEAN_0002048

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

***RRCConnectionResumeRequest* message**

```
-- ASN1START

RRCConnectionResumeRequest-r13 ::=  SEQUENCE {
    criticalExtensions                      CHOICE {
        rrcConnectionResumeRequest-r13          RRCConnectionResumeRequest-r13-IEs,
        criticalExtensionsFuture                SEQUENCE {}
    }
}

RRCConnectionResumeRequest-r13-IEs ::=      SEQUENCE {
    resumeIdentity-r13                              CHOICE {
        resumeID-r13                                    ResumeIdentity-r13,
        truncatedResumeID-r13                           BIT STRING (SIZE (24))
    },
    shortResumeMAC-I-r13                            BIT STRING (SIZE (16)),
    resumeCause-r13                             ResumeCause,
    spare                                       BIT STRING (SIZE (1))
}

ResumeCause ::=             ENUMERATED {
                                    emergency, highPriorityAccess, mt-Access, mo-Signalling,
                                    mo-Data, delayTolerantAccess-v1020, mo-VoiceCall-v1280,
spare1}


-- ASN1STOP
```

***RRCConnectionResumeRequest* field descriptions**
resumeCause
Provides the resume cause for the RRC connection resume request as provided by the upper layers.
resumeIdentity
UE identity to facilitate UE context retrieval at eNB
shortResumeMAC-I
Authentication token to facilitate UE authentication at eNB

– *RRCConnectionSetup*

The *RRCConnectionSetup* message is used to establish SRB1.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionSetup message

```
-- ASN1START

RRCConnectionSetup ::=              SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionSetup-r8               RRCConnectionSetup-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
```


DAINGEAN_0002049

```
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionSetup-r8-IEs ::=       SEQUENCE {
    radioResourceConfigDedicated        RadioResourceConfigDedicated,
    nonCriticalExtension                RRCConnectionSetup-v8a0-IEs         OPTIONAL
}

RRCConnectionSetup-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionSetupComplete*

The *RRCConnectionSetupComplete* message is used to confirm the successful completion of an RRC connection establishment.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionSetupComplete message

```
-- ASN1START

RRCConnectionSetupComplete ::=      SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            rrcConnectionSetupComplete-r8       RRCConnectionSetupComplete-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionSetupComplete-r8-IEs ::= SEQUENCE {
    selectedPLMN-Identity               INTEGER (1..maxPLMN-r11),
    registeredMME                       RegisteredMME                       OPTIONAL,
    dedicatedInfoNAS                    DedicatedInfoNAS,
    nonCriticalExtension                RRCConnectionSetupComplete-v8a0-IEs OPTIONAL
}

RRCConnectionSetupComplete-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                RRCConnectionSetupComplete-v1020-IEs    OPTIONAL
}

RRCConnectionSetupComplete-v1020-IEs ::= SEQUENCE {
    gummei-Type-r10                     ENUMERATED {native, mapped}         OPTIONAL,
    rlf-InfoAvailable-r10               ENUMERATED {true}                   OPTIONAL,
    logMeasAvailable-r10                ENUMERATED {true}                   OPTIONAL,
    rn-SubframeConfigReq-r10            ENUMERATED {required, notRequired}  OPTIONAL,
    nonCriticalExtension                RRCConnectionSetupComplete-v1130-IEs    OPTIONAL
}

RRCConnectionSetupComplete-v1130-IEs ::= SEQUENCE {
    connEstFailInfoAvailable-r11        ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                RRCConnectionSetupComplete-v1250-IEs        OPTIONAL
}

RRCConnectionSetupComplete-v1250-IEs ::= SEQUENCE {
    mobilityState-r12                   ENUMERATED {normal, medium, high, spare}    OPTIONAL,
    mobilityHistoryAvail-r12            ENUMERATED {true}               OPTIONAL,
    logMeasAvailableMBSFN-r12           ENUMERATED {true}               OPTIONAL,
```


DAINGEAN_0002050

```
    nonCriticalExtension                RRCConnectionSetupComplete-v1320-IEs
    OPTIONAL
}

RRCConnectionSetupComplete-v1320-IEs ::= SEQUENCE {
    ce-ModeB-r13                        ENUMERATED {supported}          OPTIONAL,
    s-TMSI-r13                              S-TMSI                          OPTIONAL,
    attachWithoutPDN-Connectivity-r13       ENUMERATED {true}               OPTIONAL,
    up-CIoT-EPS-Optimisation-r13            ENUMERATED {true}               OPTIONAL,
    cp-CIoT-EPS-Optimisation-r13            ENUMERATED {true}               OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

RegisteredMME ::=                   SEQUENCE {
    plmn-Identity                       PLMN-Identity                       OPTIONAL,
    mmegi                               BIT STRING (SIZE (16)),
    mmec                                MMEC
}

-- ASN1STOP
```

***RRCConnectionSetupComplete* field descriptions**
attachWithoutPDN-Connectivity
This field is used to indicate that the UE performs an Attach without PDN connectivity procedure, as indicated by the upper layers, TS 24.301 [35].
cp-CIoT-EPS-Optimisation
This field is included when the UE supports the control plane CIoT EPS Optimisation, see TS 24.301 [35].
ce-ModeB
Indicates whether the UE supports operation in CE mode B, as specified in TS 36.306 [5].
gummei-Type
This field is used to indicate whether the GUMMEI included is native (assigned by EPC) or mapped (from 2G/3G identifiers).
mmegi
Provides the Group Identity of the registered MME within the PLMN, as provided by upper layers, see TS 23.003 [27].
mobilityState
This field indicates the UE mobility state (as defined in TS 36.304 [4, 5.2.4.3]) just prior to UE going into RRC_CONNECTED state. The UE indicates the value of *medium* and *high* when being in Medium-mobility and High-mobility states respectively. Otherwise the UE indicates the value *normal*.
registeredMME
This field is used to transfer the GUMMEI of the MME where the UE is registered, as provided by upper layers.
rn-SubframeConfigReq
If present, this field indicates that the connection establishment is for an RN and whether a subframe configuration is requested or not.
selectedPLMN-Identity
Index of the PLMN selected by the UE from the *plmn-IdentityList* included in SIB1. 1 if the 1st PLMN is selected from the *plmn-IdentityList* included in SIB1, 2 if the 2nd PLMN is selected from the *plmn-IdentityList* included in SIB1 and so on.
up-CIoT-EPS-Optimisation
This field is included when the UE supports the User plane CIoT EPS Optimisation, see TS 24.301 [35].

– *SCGFailureInformation*

The *SCGFailureInformation* message is used to provide information regarding failures detected by the UE.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

SCGFailureInformation message

```
-- ASN1START

SCGFailureInformation-r12 ::=       SEQUENCE {
    criticalExtensions                  CHOICE {
```


DAINGEAN_0002051

```
        c1                                  CHOICE {
            scgFailureInformation-r12           SCGFailureInformation-r12-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SCGFailureInformation-r12-IEs ::=   SEQUENCE {
    failureReportSCG-r12                FailureReportSCG-r12            OPTIONAL,
    nonCriticalExtension                SCGFailureInformation-v1310-IEs OPTIONAL
}

SCGFailureInformation-v1310-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

FailureReportSCG-r12 ::=            SEQUENCE {
    failureType-r12                     ENUMERATED {t313-Expiry, randomAccessProblem,
                                                    rlc-MaxNumRetx, scg-ChangeFailure },
    measResultServFreqList-r12          MeasResultServFreqList-r10      OPTIONAL,
    measResultNeighCells-r12            MeasResultList2EUTRA-r9         OPTIONAL,
    ...,
    [[  failureType-v1290               ENUMERATED {maxUL-TimingDiff-v1290} OPTIONAL
    ]],
    [[  measResultServFreqListExt-r13   MeasResultServFreqListExt-r13       OPTIONAL
    ]]
}

-- ASN1STOP
```

– SCPTMConfiguration

The *SCPTMConfiguration* message contains the control information applicable for MBMS services transmitted via SC-MRB.

Signalling radio bearer: N/A

RLC-SAP: UM

Logical channel: SC-MCCH

Direction: E-UTRAN to UE

SCPTMConfiguration message

```
-- ASN1START

SCPTMConfiguration-r13 ::=      SEQUENCE {
    sc-mtch-InfoList-r13            SC-MTCH-InfoList-r13,
    scptm-NeighbourCellList-r13     SCPTM-NeighbourCellList-r13         OPTIONAL,   -- Need OP
    lateNonCriticalExtension        OCTET STRING                        OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***SCPTMConfiguration* field descriptions**
sc-mtch-InfoList   Provides the configuration of each SC-MTCH in the current cell.
scptm-NeighbourCellList   List of neighbour cells providing MBMS services via SC-MRB. When absent, the UE shall assume that MBMS services listed in the *SCPTMConfiguration* message are not provided via SC-MRB in any neighbour cell.

– SecurityModeCommand

The *SecurityModeCommand* message is used to command the activation of AS security.

DAINGEAN_0002052

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

SecurityModeCommand message

```
-- ASN1START

SecurityModeCommand ::=             SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            securityModeCommand-r8              SecurityModeCommand-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SecurityModeCommand-r8-IEs ::=      SEQUENCE {
    securityConfigSMC                   SecurityConfigSMC,
    nonCriticalExtension                SecurityModeCommand-v8a0-IEs        OPTIONAL
}

SecurityModeCommand-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

SecurityConfigSMC ::=                   SEQUENCE {
    securityAlgorithmConfig             SecurityAlgorithmConfig,
    ...
}

-- ASN1STOP
```

– *SecurityModeComplete*

The *SecurityModeComplete* message is used to confirm the successful completion of a security mode command.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

SecurityModeComplete message

```
-- ASN1START

SecurityModeComplete ::=            SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        securityModeComplete-r8             SecurityModeComplete-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SecurityModeComplete-r8-IEs ::=     SEQUENCE {
    nonCriticalExtension                SecurityModeComplete-v8a0-IEs
    OPTIONAL
}

SecurityModeComplete-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
```


DAINGEAN_0002053

```
}

-- ASN1STOP
```

– SecurityModeFailure

The *SecurityModeFailure* message is used to indicate an unsuccessful completion of a security mode command.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

SecurityModeFailure message

```
-- ASN1START

SecurityModeFailure ::=             SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        securityModeFailure-r8              SecurityModeFailure-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SecurityModeFailure-r8-IEs ::=      SEQUENCE {
    nonCriticalExtension                SecurityModeFailure-v8a0-IEs
    OPTIONAL
}

SecurityModeFailure-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– SidelinkUEInformation

The *SidelinkUEInformation* message is used for the indication of sidelink information to the eNB.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

SidelinkUEInformation message

```
-- ASN1START

SidelinkUEInformation-r12 ::=       SEQUENCE {
    criticalExtensions              CHOICE {
        c1                              CHOICE {
            sidelinkUEInformation-r12       SidelinkUEInformation-r12-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SidelinkUEInformation-r12-IEs ::=   SEQUENCE {
    commRxInterestedFreq-r12        ARFCN-ValueEUTRA-r9         OPTIONAL,
    commTxResourceReq-r12           SL-CommTxResourceReq-r12    OPTIONAL,
    discRxInterest-r12              ENUMERATED {true}           OPTIONAL,
```


DAINGEAN_0002054

```
    discTxResourceReq-r12           INTEGER (1..63)             OPTIONAL,
    lateNonCriticalExtension        OCTET STRING                OPTIONAL,
    nonCriticalExtension            SidelinkUEInformation-v1310-IEs OPTIONAL
}

SidelinkUEInformation-v1310-IEs ::= SEQUENCE {
    commTxResourceReqUC-r13     SL-CommTxResourceReq-r12    OPTIONAL,
    commTxResourceInfoReqRelay-r13      SEQUENCE {
        commTxResourceReqRelay-r13      SL-CommTxResourceReq-r12        OPTIONAL,
        commTxResourceReqRelayUC-r13    SL-CommTxResourceReq-r12        OPTIONAL,
        ue-Type-r13                     ENUMERATED {relayUE, remoteUE}
    }                                                       OPTIONAL,
    discTxResourceReq-v1310         SEQUENCE {
        carrierFreqDiscTx-r13           INTEGER (1..maxFreq)        OPTIONAL,
        discTxResourceReqAddFreq-r13    SL-DiscTxResourceReqPerFreqList-r13 OPTIONAL
    }                                                       OPTIONAL,
    discTxResourceReqPS-r13         SL-DiscTxResourceReq-r13    OPTIONAL,
    discRxGapReq-r13                    SL-GapRequest-r13           OPTIONAL,
    discTxGapReq-r13                    SL-GapRequest-r13           OPTIONAL,
    discSysInfoReportFreqList-r13       SL-DiscSysInfoReportFreqList-r13    OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                 OPTIONAL
}

SL-CommTxResourceReq-r12 ::=        SEQUENCE {
    carrierFreq-r12                 ARFCN-ValueEUTRA-r9         OPTIONAL,
    destinationInfoList-r12         SL-DestinationInfoList-r12
}

SL-DiscTxResourceReqPerFreqList-r13 ::= SEQUENCE (SIZE (1..maxFreq)) OF SL-DiscTxResourceReq-r13

SL-DiscTxResourceReq-r13 ::=        SEQUENCE {
    carrierFreqDiscTx-r13           INTEGER (1..maxFreq)            OPTIONAL,
    discTxResourceReq-r13           INTEGER (1..63)
}

SL-DestinationInfoList-r12 ::=  SEQUENCE (SIZE (1..maxSL-Dest-r12)) OF SL-DestinationIdentity-r12

SL-DestinationIdentity-r12 ::=  BIT STRING (SIZE (24))

SL-DiscSysInfoReportFreqList-r13 ::=    SEQUENCE (SIZE (1.. maxSL-DiscSysInfoReportFreq-r13)) OF SL-
DiscSysInfoReport-r13

-- ASN1STOP
```


DAINGEAN_0002055

***SidelinkUEInformation* field descriptions**
carrierFreqDiscTx Indicates the frequency by the index of the entry in field *discInterFreqList* within *SystemInformationBlockType19*. Value 1 corresponds to the first entry in *discInterFreqList* within *SystemInformationBlockType19*, value 2 corresponds to the second entry in this list and so on.
commRxInterestedFreq Indicates the frequency on which the UE is interested to receive sidelink communication.
commTxResourceReq Indicates the frequency on which the UE is interested to transmit non-relay related sidelink communication as well as the one-to-many sidelink communication transmission destination(s) for which the UE requests E-UTRAN to assign dedicated resources. NOTE 1.
commTxResourceReqRelay Indicates the relay related one-to-many sidelink communication transmission destination(s) for which the sidelink relay UE requests E-UTRAN to assign dedicated resources.
commTxResourceReqRelayUC Indicates the relay related one-to-one sidelink communication transmission destination(s) for which the sidelink relay UE or sidelink remote UE requests E-UTRAN to assign dedicated resources i.e. either contains the unicast destination identity of the sidelink relay UE or of the sidelink remote UE.
commTxResourceReqUC Indicates the frequency on which the UE is interested to transmit non-relay related one-to-one sidelink communication as well as the sidelink communication transmission destination(s) for which the UE requests E-UTRAN to assign dedicated resources. NOTE 1.
destinationInfoList Indicates the destination(s) for relay or non-relay related one-to-one or one-to-many sidelink communication. For one-to-one sidelink communication the destination is identified by the ProSe UE ID for unicast communication, while for one-to-many the destination it is identified by the ProSe Layer-2 Group ID as specified in TS 23.303 [68].
discRxInterest Indicates that the UE is interested to monitor sidelink discovery announcements.
discSysInfoReportFreqList Indicates, for one or more frequecies, a list of sidelink discovery related parameters acquired from system Information of cells on configured inter-frequency carriers.
discTxResourceReq Indicates the number of separate discovery message(s) the UE wants to transmit every discovery period. This field concerns the resources the UE requires every discovery period for transmitting sidelink discovery announcement(s).
discTxResourceReqAddFreq Indicates, for any frequencies in addition to the one covered by *discTxResourceReq*, the number of separate discovery message(s) the UE wants to transmit every discovery period. This field concerns the resources the UE requires every discovery period for transmitting sidelink discovery announcement(s).
discTxResourceReqPS Indicates the number of separate PS related discovery message(s) the UE wants to transmit every discovery period. This field concerns the resources the UE requires every discovery period for transmitting PS related sidelink discovery announcement(s).

NOTE 1: When configuring *commTxResourceReq*, *commTxResourceReqUC*, *commTxResourceReqRelay* and *commTxResourceReqRelayUC*, E-UTRAN configures at most *maxSL-Dest-r12* destinations in total (i.e. as included in the four fields together).

– *SystemInformation*

The *SystemInformation* message is used to convey one or more System Information Blocks. All the SIBs included are transmitted with the same periodicity. *SystemInformation-BR* uses the same structure as *SystemInformation*.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channels: BCCH and BR-BCCH

Direction: E-UTRAN to UE

SystemInformation message

```
-- ASN1START
```


DAINGEAN_0002056

```
SystemInformation-BR-r13 ::=    SystemInformation

SystemInformation ::=               SEQUENCE {
    criticalExtensions                  CHOICE {
        systemInformation-r8                SystemInformation-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}
SystemInformation-r8-IEs ::=        SEQUENCE {
    sib-TypeAndInfo                     SEQUENCE (SIZE (1..maxSIB)) OF CHOICE {
        sib2                                SystemInformationBlockType2,
        sib3                                SystemInformationBlockType3,
        sib4                                SystemInformationBlockType4,
        sib5                                SystemInformationBlockType5,
        sib6                                SystemInformationBlockType6,
        sib7                                SystemInformationBlockType7,
        sib8                                SystemInformationBlockType8,
        sib9                                SystemInformationBlockType9,
        sib10                               SystemInformationBlockType10,
        sib11                               SystemInformationBlockType11,
        ...,
        sib12-v920                          SystemInformationBlockType12-r9,
        sib13-v920                          SystemInformationBlockType13-r9,
        sib14-v1130                         SystemInformationBlockType14-r11,
        sib15-v1130                         SystemInformationBlockType15-r11,
        sib16-v1130                         SystemInformationBlockType16-r11,
        sib17-v1250                         SystemInformationBlockType17-r12,
        sib18-v1250                         SystemInformationBlockType18-r12,
        sib19-v1250                         SystemInformationBlockType19-r12,
        sib20-v1310                         SystemInformationBlockType20-r13
    },
    nonCriticalExtension                SystemInformation-v8a0-IEs          OPTIONAL
}

SystemInformation-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *SystemInformationBlockType1*

SystemInformationBlockType1 contains information relevant when evaluating if a UE is allowed to access a cell and defines the scheduling of other system information. *SystemInformationBlockType1-BR* uses the same structure as *SystemInformationBlockType1*.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channels: BCCH and BR-BCCH

Direction: E-UTRAN to UE

SystemInformationBlockType1 message

```
-- ASN1START

SystemInformationBlockType1-BR-r13 ::=  SystemInformationBlockType1

SystemInformationBlockType1 ::=     SEQUENCE {
    cellAccessRelatedInfo               SEQUENCE {
        plmn-IdentityList                   PLMN-IdentityList,
        trackingAreaCode                    TrackingAreaCode,
        cellIdentity                        CellIdentity,
        cellBarred                          ENUMERATED {barred, notBarred},
        intraFreqReselection                ENUMERATED {allowed, notAllowed},
        csg-Indication                      BOOLEAN,
        csg-Identity                        CSG-Identity            OPTIONAL    -- Need OR
    },
    cellSelectionInfo                   SEQUENCE {
        q-RxLevMin                          Q-RxLevMin,
```


DAINGEAN_0002057

```
        q-RxLevMinOffset                    INTEGER (1..8)          OPTIONAL    -- Need OP
    },
    p-Max                                   P-Max                   OPTIONAL,           -- Need OP
    freqBandIndicator                       FreqBandIndicator,
    schedulingInfoList                      SchedulingInfoList,
    tdd-Config                              TDD-Config              OPTIONAL,   -- Cond TDD
    si-WindowLength                         ENUMERATED {
                                                ms1, ms2, ms5, ms10, ms15, ms20,
                                                ms40},
    systemInfoValueTag                      INTEGER (0..31),
    nonCriticalExtension                    SystemInformationBlockType1-v890-IEs    OPTIONAL
}

SystemInformationBlockType1-v890-IEs::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING (CONTAINING SystemInformationBlockType1-v8h0-
IEs)            OPTIONAL,
    nonCriticalExtension                SystemInformationBlockType1-v920-IEs    OPTIONAL
}

-- Late non critical extensions
SystemInformationBlockType1-v8h0-IEs ::=    SEQUENCE {
    multiBandInfoList                   MultiBandInfoList       OPTIONAL,   -- Need OR
    nonCriticalExtension                SystemInformationBlockType1-v9e0-IEs    OPTIONAL
}

SystemInformationBlockType1-v9e0-IEs ::= SEQUENCE {
    freqBandIndicator-v9e0              FreqBandIndicator-v9e0      OPTIONAL,   -- Cond FBI-max
    multiBandInfoList-v9e0              MultiBandInfoList-v9e0      OPTIONAL,   -- Cond mFBI-max
    nonCriticalExtension                SystemInformationBlockType1-v10j0-IEs   OPTIONAL
}

SystemInformationBlockType1-v10j0-IEs ::= SEQUENCE {
    freqBandInfo-r10                    NS-PmaxList-r10             OPTIONAL,   -- Need OR
    multiBandInfoList-v10j0             MultiBandInfoList-v10j0     OPTIONAL,   -- Need OR
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

-- Regular non critical extensions
SystemInformationBlockType1-v920-IEs ::=    SEQUENCE {
    ims-EmergencySupport-r9             ENUMERATED {true}           OPTIONAL,   -- Need OR
    cellSelectionInfo-v920              CellSelectionInfo-v920      OPTIONAL,   -- Cond RSRQ
    nonCriticalExtension                SystemInformationBlockType1-v1130-IEs   OPTIONAL
}

SystemInformationBlockType1-v1130-IEs ::=   SEQUENCE {
    tdd-Config-v1130                TDD-Config-v1130            OPTIONAL,   -- Cond TDD-OR
    cellSelectionInfo-v1130         CellSelectionInfo-v1130     OPTIONAL,   -- Cond WB-RSRQ
    nonCriticalExtension            SystemInformationBlockType1-v1250-IEs   OPTIONAL
}

SystemInformationBlockType1-v1250-IEs ::=   SEQUENCE {
    cellAccessRelatedInfo-v1250             SEQUENCE {
        category0Allowed-r12                    ENUMERATED {true}       OPTIONAL    -- Need OP
    },
    cellSelectionInfo-v1250             CellSelectionInfo-v1250     OPTIONAL,   -- Cond RSRQ2
    freqBandIndicatorPriority-r12       ENUMERATED {true}           OPTIONAL,   -- Cond mFBI
    nonCriticalExtension            SystemInformationBlockType1-v1310-IEs   OPTIONAL
}

SystemInformationBlockType1-v1310-IEs ::=   SEQUENCE {
    hyperSFN-r13                            BIT STRING (SIZE (10))      OPTIONAL,   -- Need OR
    eDRX-Allowed-r13                        ENUMERATED {true}           OPTIONAL,   -- Need OR
    cellSelectionInfoCE-r13             CellSelectionInfoCE-r13 OPTIONAL,   -- Need OP
    bandwidthReducedAccessRelatedInfo-r13   SEQUENCE {
        si-WindowLength-BR-r13                  ENUMERATED {
                                                    ms20, ms40, ms60, ms80, ms120,
                                                    ms160, ms200, spare},
        si-RepetitionPattern-r13                ENUMERATED {everyRF, every2ndRF, every4thRF,
                                                            every8thRF},
        schedulingInfoList-BR-r13               SchedulingInfoList-BR-r13   OPTIONAL,   -- Need OR
        fdd-DownlinkOrTddSubframeBitmapBR-r13   CHOICE {
            subframePattern10-r13                   BIT STRING (SIZE (10)),
            subframePattern40-r13                   BIT STRING (SIZE (40))
        }                                                                   OPTIONAL,   -- Need OP
        fdd-UplinkSubframeBitmapBR-r13          BIT STRING (SIZE (10))      OPTIONAL,   -- Need OP
        startSymbolBR-r13                       INTEGER (1..4),
        si-HoppingConfigCommon-r13              ENUMERATED {on,off},
        si-ValidityTime-r13                     ENUMERATED {true}   OPTIONAL,           -- Need OP
```


DAINGEAN_0002058

```
        systemInfoValueTagList-r13              SystemInfoValueTagList-r13  OPTIONAL    -- Need OR
    }                                                                       OPTIONAL,   -- Cond BW-reduced
    nonCriticalExtension                        SystemInformationBlockType1-v1320-IEs   OPTIONAL
}

SystemInformationBlockType1-v1320-IEs ::=   SEQUENCE {
    freqHoppingParametersDL-r13             SEQUENCE {
        mpdcch-pdsch-HoppingNB-r13              ENUMERATED {nb2, nb4}       OPTIONAL,   -- Need OR
        interval-DLHoppingConfigCommonModeA-r13  CHOICE {
            interval-FDD-r13                    ENUMERATED {int1, int2, int4, int8},
            interval-TDD-r13                    ENUMERATED {int1, int5, int10, int20}
        }                                                                   OPTIONAL,   -- Need OR
        interval-DLHoppingConfigCommonModeB-r13  CHOICE {
            interval-FDD-r13                    ENUMERATED {int2, int4, int8, int16},
            interval-TDD-r13                    ENUMERATED { int5, int10, int20, int40}
        }                                                                   OPTIONAL,   -- Need OR
        mpdcch-pdsch-HoppingOffset-r13          INTEGER (1..maxAvailNarrowBands-r13)    OPTIONAL --
Need OR
    }                                                                   OPTIONAL,   -- Cond SI-Hopping
    nonCriticalExtension                        SEQUENCE {}                 OPTIONAL
}

PLMN-IdentityList ::=                   SEQUENCE (SIZE (1..maxPLMN-r11)) OF PLMN-IdentityInfo

PLMN-IdentityInfo ::=                   SEQUENCE {
    plmn-Identity                           PLMN-Identity,
    cellReservedForOperatorUse              ENUMERATED {reserved, notReserved}
}

SchedulingInfoList ::= SEQUENCE (SIZE (1..maxSI-Message)) OF SchedulingInfo

SchedulingInfo ::=  SEQUENCE {
    si-Periodicity                      ENUMERATED {
                                            rf8, rf16, rf32, rf64, rf128, rf256, rf512},
    sib-MappingInfo                     SIB-MappingInfo
}

SchedulingInfoList-BR-r13 ::= SEQUENCE (SIZE (1..maxSI-Message)) OF SchedulingInfo-BR-r13

SchedulingInfo-BR-r13 ::=   SEQUENCE {
    si-Narrowband-r13               INTEGER (1..maxAvailNarrowBands-r13),
    si-TBS-r13                      ENUMERATED {b152, b208, b256, b328, b408, b504, b600, b712,
                                                b808, b936}
}

SIB-MappingInfo ::= SEQUENCE (SIZE (0..maxSIB-1)) OF SIB-Type

SIB-Type ::=                        ENUMERATED {
                                        sibType3, sibType4, sibType5, sibType6,
                                        sibType7, sibType8, sibType9, sibType10,
                                        sibType11, sibType12-v920, sibType13-v920,
                                        sibType14-v1130, sibType15-v1130,
                                        sibType16-v1130, sibType17-v1250, sibType18-v1250,
                                        ..., sibType19-v1250, sibType20-v1310}

SystemInfoValueTagList-r13 ::=      SEQUENCE (SIZE (1..maxSI-Message)) OF SystemInfoValueTagSI-r13

SystemInfoValueTagSI-r13 ::=        INTEGER (0..3)

CellSelectionInfo-v920 ::=          SEQUENCE {
    q-QualMin-r9                        Q-QualMin-r9,
    q-QualMinOffset-r9                  INTEGER (1..8)                      OPTIONAL    -- Need OP
}

CellSelectionInfo-v1130 ::=         SEQUENCE {
    q-QualMinWB-r11                     Q-QualMin-r9
}

CellSelectionInfo-v1250 ::=         SEQUENCE {
    q-QualMinRSRQ-OnAllSymbols-r12                  Q-QualMin-r9
}

-- ASN1STOP
```


DAINGEAN_0002059

SystemInformationBlockType1 field descriptions
bandwithReducedAccessRelatedInfo Access related information for BL UEs and UEs in CE. NOTE 3.
category0Allowed The presence of this field indicates category 0 UEs are allowed to access the cell.
cellBarred barred means the cell is barred, as defined in TS 36.304 [4].
cellIdentity Indicates the cell identity. NOTE 2.
cellReservedForOperatorUse As defined in TS 36.304 [4].
cellSelectionInfoCE Cell selection information for BL UEs and UEs in CE. NOTE 3.
csg-Identity Identity of the Closed Subscriber Group the cell belongs to.
csg-Indication If set to TRUE the UE is only allowed to access the cell if it is a CSG member cell, if selected during manual CSG selection or to obtain limited service, see TS 36.304 [4].
eDRX-Allowed The presence of this field indicates if idle mode extended DRX is allowed in the cell. The UE shall stop using extended DRX in idle mode if *eDRX-Allowed* is not present.
fdd-DownlinkOrTddSubframeBitmapBR The set of valid subframes for FDD downlink or TDD transmissions, see TS 36.213 [23]. The set of valid subframes is a subset of non-MBSFN subframes indicated in *mbsfn-SubframeConfigList* . If the field is not present all subframes are considered as valid subframes for FDD downlink transmission and all DL subframes according to the uplink-downlink configuration (see TS 36.211) are considered as valid subframes for TDD DL transmission. If *mbsfn-SubframeConfigList* is indicated in *SystemInformationBlockType2*, the field is present.
fdd-UplinkSubframeBitmapBR The set of valid subframes for FDD uplink transmissions for BL UEs, see TS 36.213 [23]. If the field is not present, then UE considers all uplink subframes as valid subframes for FDD uplink transmissions.
freqBandIndicatorPriority If the field is present and supported by the UE, the UE shall prioritize the frequency bands in the *multiBandInfoList* field in decreasing priority order. Only if the UE does not support any of the frequency band in *multiBandInfoList,* the UE shall use the value in *freqBandIndicator* field. Otherwise, the UE applies frequency band according to the rules defined in *multiBandInfoList.* NOTE 2.
freqBandInfo A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] for the frequency band in *freqBandIndicator*.
hyperSFN Indicates hyper SFN which increments by one when the SFN wraps around.
ims-EmergencySupport Indicates whether the cell supports IMS emergency bearer services for UEs in limited service mode. If absent, IMS emergency call is not supported by the network in the cell for UEs in limited service mode. NOTE 2.
intraFreqReselection Used to control cell reselection to intra-frequency cells when the highest ranked cell is barred, or treated as barred by the UE, as specified in TS 36.304 [4]. NOTE 2.
multiBandInfoList A list of additional frequency band indicators, as defined in TS 36.101 [42, table 5.5-1] that the cell belongs to. If the UE supports the frequency band in the *freqBandIndicator* field it shall apply that frequency band. Otherwise, the UE shall apply the first listed band which it supports in the *multiBandInfoList* field. If E-UTRAN includes *multiBandInfoList-v9e0* it includes the same number of entries, and listed in the same order, as in *multiBandInfoList* (i.e. without suffix). See Annex D for more descriptions. The UE shall ignore the rule defined in this field description if *freqBandIndicatorPriority* is present and supported by the UE.
multiBandInfoList-v10j0 A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] for the frequency bands in *multiBandInfoList* (i.e. without suffix) and *multiBandInfoList-v9e0*. If E-UTRAN includes *multiBandInfoList-v10j0*, it includes the same number of entries, and listed in the same order, as in *multiBandInfoList* (i.e. without suffix).
plmn-IdentityList List of PLMN identities. The first listed *PLMN-Identity* is the primary PLMN. NOTE 2.
p-Max Value applicable for the cell. If absent the UE applies the maximum power according to the UE capability. NOTE 2.
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4]. If *cellSelectionInfo-v920* is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$. NOTE 1.

DAINGEAN_0002060

***SystemInformationBlockType1* field descriptions**
q-QualMinRSRQ-OnAllSymbols
If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, perform RSRQ measurement on all OFDM symbols in accordance with TS 36.214 [48]. NOTE 1.
q-QualMinOffset
Parameter "$Q_{qualminoffset}$" in TS 36.304 [4]. Actual value $Q_{qualminoffset}$ = field value [dB]. If *cellSelectionInfo-v920* is not present or the field is not present, the UE applies the (default) value of 0 dB for $Q_{qualminoffset}$. Affects the minimum required quality level in the cell.
q-QualMinWB
If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, use a wider bandwidth in accordance with TS 36.133 [16]. NOTE 1.
q-RxLevMinOffset
Parameter $Q_{rxlevminoffset}$ in TS 36.304 [4]. Actual value $Q_{rxlevminoffset}$ = field value * 2 [dB]. If absent, the UE applies the (default) value of 0 dB for $Q_{rxlevminoffset}$. Affects the minimum required Rx level in the cell.
sib-MappingInfo
List of the SIBs mapped to this *SystemInformation* message.There is no mapping information of SIB2; it is always present in the first *SystemInformation* message listed in the *schedulingInfoList* list.
si-HoppingConfigCommon
Frequency hopping activation/deactivation for BR versions of SI messages and MPDCCH of paging.
si-Narrowband
This field indicates the index of a narrowband used to broadcast the SI message towards low complexity UEs and UEs supporting CE, see TS 36.211 [21] and TS 36.213 [23].
si-RepetitionPattern
Indicates the radio frames within the SI window used for SI message transmission. Value everyRF corresponds to every radio frame, Value every2ndRF corresponds to every second radio frame, starting from the first radio frame of the SI window, and so on.
si-Periodicity
Periodicity of the SI-message in radio frames, such that rf8 denotes 8 radio frames, rf16 denotes 16 radio frames, and so on.
si-TBS
This field indicates the transport block size information used to broadcast the SI message towards low complexity UEs and UEs supporting CE, see TS 36.213 [23, Table 7.1.7.2.1-1] for a 6 PRB bandwidth and a QPSK modulation.
schedulingInfoList-BR
Indicates additional scheduling information of SI messages for BL UEs and UEs in CE. It includes the same number of entries, and listed in the same order, as in *schedulingInfoList* (without suffix).
si-ValidityTime
Indicates system information validity timer. If set to TRUE, the timer is set to 3h, otherwise the timer is set to 24h.
si-WindowLength, si-WindowLength-BR
Common SI scheduling window for all SIs. Unit in milliseconds, where ms1 denotes 1 millisecond, ms2 denotes 2 milliseconds and so on. In case *si-WindowLength-BR-r13* is present and the UE is a BL UE or a UE in CE, the UE shall use *si-WindowLength-BR-r13* and ignore the original field *si-WindowLength* (without suffix). UEs other than BL UEs or UEs in CE shall ignore the extension field *si-WindowLength-BR-r13*.
startSymbolBR
For BL UEs and UEs in CE, indicates the OFDM starting symbol for any MPDCCH, PDSCH scheduled on the same cell except the PDSCH carrying *SystemInformationBlockType1-BR*, see TS 36.213 [23]. Values 1, 2, and 3 are applicable for *dl-Bandwidth* greater than 10 resource blocks. Values 2, 3, and 4 are applicable otherwise.
systemInfoValueTagList
Indicates SI message specific value tags for BL UEs and UE in CE. It includes the same number of entries, and listed in the same order, as in SchedulingInfoList (without suffix).
systemInfoValueTagSI
SI message specific value tag as specified in subclause 5.2.1.3. Common for all SIBs within the SI message other than MIB, SIB1, SIB10, SIB11, SIB12 and SIB14.
systemInfoValueTag
Common for all SIBs other than MIB, SIB1, SIB10, SIB11, SIB12 and SIB14. Change of MIB and SIB1 is detected by acquisition of the corresponding message.
tdd-Config
Specifies the TDD specific physical channel configurations. NOTE 2.
trackingAreaCode
A *trackingAreaCode* that is common for all the PLMNs listed. NOTE2.

NOTE 1: The value the UE applies for parameter "$Q_{qualmin}$" in TS 36.304 [4] depends on the *q-QualMin* fields signalled by E-UTRAN and supported by the UE. In case multiple candidate options are available, the UE shall select the highest priority candidate option according to the priority order indicated by the following table (top row is highest priority).

DAINGEAN_0002061

q-QualMinRSRQ-OnAllSymbols	q-QualMinWB	Value of parameter "$Q_{qualmin}$" in TS 36.304 [4]
Included	Included	*q-QualMinRSRQ-OnAllSymbols* – (*q-QualMin* – *q-QualMinWB*)
Included	Not included	*q-QualMinRSRQ-OnAllSymbols*
Not included	Included	*q-QualMinWB*
Not included	Not included	*q-QualMin*

NOTE 2: E-UTRAN sets this field to the same value for all instances of SIB1 message that are broadcasted within the same cell.

NOTE 3: E-UTRAN configures this field only in the BR version of SIB1 message.

Conditional presence	Explanation
BW-reduced	The field is optional present, Need OR, if *schedulingInfoSIB1-BR* in MIB is set to a value greater than 0. Otherwise the field is not present.
FBI-max	The field is mandatory present if *freqBandIndicator* (i.e. without suffix) is set to *maxFBI*. Otherwise the field is not present.
mFBI	The field is optional present, Need OR, if *multiBandInfoList* is present. Otherwise the field is not present.
mFBI-max	The field is mandatory present if one or more entries in *multiBandInfoList* (i.e. without suffix, introduced in -v8h0) is set to *maxFBI*. Otherwise the field is not present.
RSRQ	The field is mandatory present if SIB3 is being broadcast and *threshServingLowQ* is present in SIB3; otherwise optionally present, Need OP.
RSRQ2	The field is mandatory present if *q-QualMinRSRQ-OnAllSymbols* is present in SIB3; otherwise it is not present and the UE shall delete any existing value for this field.
SI-Hopping	The field is mandatory present if *si-HoppingConfigCommon* field is broadcasted and set to *on*. Otherwise the field is not present.
TDD	This field is mandatory present for TDD; it is not present for FDD and the UE shall delete any existing value for this field.
TDD-OR	The field is optional present for TDD, need OR; it is not present for FDD.
WB-RSRQ	The field is optionally present, need OP if the measurement bandwidth indicated by *allowedMeasBandwidth* in *systemInformationBlockType3* is 50 resource blocks or larger; otherwise it is not present.

– *UEAssistanceInformation*

The *UEAssistanceInformation* message is used for the indication of UE assistance information to the eNB.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

UEAssistanceInformation message

```
-- ASN1START

UEAssistanceInformation-r11 ::=             SEQUENCE {
    criticalExtensions                      CHOICE {
        c1                                      CHOICE {
            ueAssistanceInformation-r11             UEAssistanceInformation-r11-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture                SEQUENCE {}
    }
}

UEAssistanceInformation-r11-IEs ::=     SEQUENCE {
    powerPrefIndication-r11             ENUMERATED  {normal, lowPowerConsumption}   OPTIONAL,
    lateNonCriticalExtension            OCTET STRING                                OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                                 OPTIONAL
}
```


DAINGEAN_0002062

```
-- ASN1STOP
```

UEAssistanceInformation field descriptions
powerPrefIndication
Value *lowPowerConsumption* indicates the UE prefers a configuration that is primarily optimised for power saving. Otherwise the value is set to *normal*.

– *UECapabilityEnquiry*

The *UECapabilityEnquiry* message is used to request the transfer of UE radio access capabilities for E-UTRA as well as for other RATs.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

UECapabilityEnquiry message

```
-- ASN1START

UECapabilityEnquiry ::=             SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            ueCapabilityEnquiry-r8              UECapabilityEnquiry-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UECapabilityEnquiry-r8-IEs ::=      SEQUENCE {
    ue-CapabilityRequest                UE-CapabilityRequest,
    nonCriticalExtension                UECapabilityEnquiry-v8a0-IEs        OPTIONAL
}

UECapabilityEnquiry-v8a0-IEs ::=    SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                UECapabilityEnquiry-v1180-IEs
    OPTIONAL
}

UECapabilityEnquiry-v1180-IEs ::=   SEQUENCE {
    requestedFrequencyBands-r11         SEQUENCE (SIZE (1..16)) OF FreqBandIndicator-r11
                OPTIONAL,
    nonCriticalExtension                UECapabilityEnquiry-v1310-IEs
    OPTIONAL
}

UECapabilityEnquiry-v1310-IEs ::=   SEQUENCE {
    requestReducedFormat-r13            ENUMERATED {true}                   OPTIONAL,   -- Need ON
    requestSkipFallbackComb-r13     ENUMERATED {true}                   OPTIONAL,   -- Need ON
    requestedMaxCCsDL-r13               INTEGER (2..32)                 OPTIONAL,   -- Need ON
    requestedMaxCCsUL-r13               INTEGER (2..32)                 OPTIONAL,   -- Need ON
    requestReducedIntNonContComb-r13    ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

UE-CapabilityRequest ::=            SEQUENCE (SIZE (1..maxRAT-Capabilities)) OF RAT-Type

-- ASN1STOP
```


DAINGEAN_0002063

UECapabilityEnquiry field descriptions
requestReducedFormat Indicates that the UE if supported is requested to provide supported CA band combinations in the *supportedBandCombinationReduced-r13* instead of the *supportedBandCombination-r10*. The E-UTRAN includes this field if *requestSkipFallbackComb* is included in the message.
requestSkipFallbackComb Indicates that the UE shall explicitly exclude fallback CA band combinations in capability signalling.
ue-CapabilityRequest List of the RATs for which the UE is requested to transfer the UE radio access capabilities i.e. E-UTRA, UTRA, GERAN-CS, GERAN-PS, CDMA2000.
requestedFrequencyBands List of frequency bands for which the UE is requested to provide supported CA band combinations and non CA bands.
requestedMaxCCsDL, requestedMaxCCsUL Indicates the maximum number of CCs for which the UE is requested to provide supported CA band combinations and non-CA bands.
requestReducedIntNonContComb Indicates that the UE shall explicitly exclude supported intra-band non-contiguous CA band combinations other than included in capability signalling as specified in TS 36.306 [5, 4.3.5.21].

– *UECapabilityInformation*

The *UECapabilityInformation* message is used to transfer of UE radio access capabilities requested by the E-UTRAN.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

UECapabilityInformation message

```
-- ASN1START

UECapabilityInformation ::=         SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            ueCapabilityInformation-r8          UECapabilityInformation-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UECapabilityInformation-r8-IEs ::=  SEQUENCE {
    ue-CapabilityRAT-ContainerList      UE-CapabilityRAT-ContainerList,
    nonCriticalExtension                UECapabilityInformation-v8a0-IEs    OPTIONAL
}

UECapabilityInformation-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                UECapabilityInformation-v1250-IEs   OPTIONAL
}

UECapabilityInformation-v1250-IEs ::= SEQUENCE {
    ue-RadioPagingInfo-r12              UE-RadioPagingInfo-r12              OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

UECapabilityInformation field descriptions
ue-RadioPagingInfo This field contains UE capability information used for paging.

DAINGEAN_0002064

– *UEInformationRequest*

The *UEInformationRequest* is the command used by E-UTRAN to retrieve information from the UE.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

UEInformationRequest message

```
-- ASN1START

UEInformationRequest-r9     ::=            SEQUENCE {
    rrc-TransactionIdentifier       RRC-TransactionIdentifier,
    criticalExtensions              CHOICE {
        c1                              CHOICE {
            ueInformationRequest-r9             UEInformationRequest-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UEInformationRequest-r9-IEs ::=     SEQUENCE {
    rach-ReportReq-r9                   BOOLEAN,
    rlf-ReportReq-r9                    BOOLEAN,
    nonCriticalExtension                UEInformationRequest-v930-IEs       OPTIONAL
}

UEInformationRequest-v930-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                UEInformationRequest-v1020-IEs      OPTIONAL
}

UEInformationRequest-v1020-IEs ::=  SEQUENCE {
    logMeasReportReq-r10                ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension                UEInformationRequest-v1130-IEs      OPTIONAL
}

UEInformationRequest-v1130-IEs ::= SEQUENCE {
    connEstFailReportReq-r11            ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension                UEInformationRequest-v1250-IEs      OPTIONAL
}

UEInformationRequest-v1250-IEs ::= SEQUENCE {
    mobilityHistoryReportReq-r12        ENUMERATED {true}                   OPTIONAL,   -- Need ON
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***UEInformationRequest* field descriptions**

rach-ReportReq
This field is used to indicate whether the UE shall report information about the random access procedure.

– *UEInformationResponse*

The *UEInformationResponse* message is used by the UE to transfer the information requested by the E-UTRAN.

Signalling radio bearer: SRB1 or SRB2 (when logged measurement information is included)

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

DAINGEAN_0002065

UEInformationResponse message

```
-- ASN1START

UEInformationResponse-r9    ::=          SEQUENCE {
    rrc-TransactionIdentifier            RRC-TransactionIdentifier,
    criticalExtensions                   CHOICE {
        c1                               CHOICE {
            ueInformationResponse-r9                UEInformationResponse-r9-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture                SEQUENCE {}
    }
}

UEInformationResponse-r9-IEs ::=         SEQUENCE {
    rach-Report-r9                           SEQUENCE {
        numberOfPreamblesSent-r9                 NumberOfPreamblesSent-r11,
        contentionDetected-r9                    BOOLEAN
    }                                                                OPTIONAL,
    rlf-Report-r9                            RLF-Report-r9           OPTIONAL,
    nonCriticalExtension                     UEInformationResponse-v930-IEs              OPTIONAL
}

-- Late non critical extensions
UEInformationResponse-v9e0-IEs ::= SEQUENCE {
    rlf-Report-v9e0                      RLF-Report-v9e0                 OPTIONAL,
    nonCriticalExtension                 SEQUENCE {}                     OPTIONAL
}

-- Regular non critical extensions
UEInformationResponse-v930-IEs ::=  SEQUENCE {
    lateNonCriticalExtension             OCTET STRING (CONTAINING UEInformationResponse-v9e0-IEs)
    OPTIONAL,
    nonCriticalExtension                 UEInformationResponse-v1020-IEs     OPTIONAL
}

UEInformationResponse-v1020-IEs ::= SEQUENCE {
    logMeasReport-r10                    LogMeasReport-r10               OPTIONAL,
    nonCriticalExtension                 UEInformationResponse-v1130-IEs     OPTIONAL
}

UEInformationResponse-v1130-IEs ::= SEQUENCE {
    connEstFailReport-r11                ConnEstFailReport-r11           OPTIONAL,
    nonCriticalExtension                 UEInformationResponse-v1250-IEs OPTIONAL
}

UEInformationResponse-v1250-IEs ::= SEQUENCE {
    mobilityHistoryReport-r12            MobilityHistoryReport-r12       OPTIONAL,
    nonCriticalExtension                 SEQUENCE {}                     OPTIONAL
}

RLF-Report-r9 ::=                   SEQUENCE {
    measResultLastServCell-r9                SEQUENCE {
        rsrpResult-r9                            RSRP-Range,
        rsrqResult-r9                            RSRQ-Range          OPTIONAL
    },
    measResultNeighCells-r9              SEQUENCE {
        measResultListEUTRA-r9               MeasResultList2EUTRA-r9         OPTIONAL,
        measResultListUTRA-r9                MeasResultList2UTRA-r9          OPTIONAL,
        measResultListGERAN-r9               MeasResultListGERAN             OPTIONAL,
        measResultsCDMA2000-r9               MeasResultList2CDMA2000-r9      OPTIONAL
    }   OPTIONAL,
    ...,
    [[  locationInfo-r10                 LocationInfo-r10        OPTIONAL,
        failedPCellId-r10                        CHOICE {
            cellGlobalId-r10                         CellGlobalIdEUTRA,
            pci-arfcn-r10                            SEQUENCE {
                physCellId-r10                           PhysCellId,
                carrierFreq-r10                          ARFCN-ValueEUTRA
            }
        }                                                           OPTIONAL,
        reestablishmentCellId-r10        CellGlobalIdEUTRA          OPTIONAL,
        timeConnFailure-r10              INTEGER (0..1023)          OPTIONAL,
        connectionFailureType-r10        ENUMERATED {rlf, hof}      OPTIONAL,
        previousPCellId-r10              CellGlobalIdEUTRA          OPTIONAL
    ]],
    [[  failedPCellId-v1090              SEQUENCE {
```


DAINGEAN_0002066

```
            carrierFreq-v1090               ARFCN-ValueEUTRA-v9e0
        }                                                               OPTIONAL
    ]],
    [[  basicFields-r11                 SEQUENCE {
            c-RNTI-r11                      C-RNTI,
            rlf-Cause-r11                   ENUMERATED {
                                                t310-Expiry, randomAccessProblem,
                                                rlc-MaxNumRetx, t312-Expiry-r12},
            timeSinceFailure-r11            TimeSinceFailure-r11
        }                                                               OPTIONAL,
        previousUTRA-CellId-r11         SEQUENCE {
            carrierFreq-r11                 ARFCN-ValueUTRA,
            physCellId-r11                  CHOICE {
                fdd-r11                         PhysCellIdUTRA-FDD,
                tdd-r11                         PhysCellIdUTRA-TDD
            },
            cellGlobalId-r11                CellGlobalIdUTRA            OPTIONAL
        }                                                               OPTIONAL,
        selectedUTRA-CellId-r11         SEQUENCE {
            carrierFreq-r11                 ARFCN-ValueUTRA,
            physCellId-r11                  CHOICE {
                fdd-r11                         PhysCellIdUTRA-FDD,
                tdd-r11                         PhysCellIdUTRA-TDD
            }
        }                                                               OPTIONAL
    ]],
    [[  failedPCellId-v1250             SEQUENCE {
            tac-FailedPCell-r12         TrackingAreaCode
        }                                                               OPTIONAL,
        measResultLastServCell-v1250    RSRQ-Range-v1250                OPTIONAL,
        lastServCellRSRQ-Type-r12       RSRQ-Type-r12                   OPTIONAL,
        measResultListEUTRA-v1250       MeasResultList2EUTRA-v1250      OPTIONAL
    ]],
    [[  drb-EstablishedWithQCI-1-r13            ENUMERATED {qci1}               OPTIONAL
    ]]
}

RLF-Report-v9e0 ::=                 SEQUENCE {
    measResultListEUTRA-v9e0            MeasResultList2EUTRA-v9e0
}

MeasResultList2EUTRA-r9 ::=             SEQUENCE (SIZE (1..maxFreq)) OF MeasResult2EUTRA-r9

MeasResultList2EUTRA-v9e0 ::=           SEQUENCE (SIZE (1..maxFreq)) OF MeasResult2EUTRA-v9e0

MeasResultList2EUTRA-v1250 ::=          SEQUENCE (SIZE (1..maxFreq)) OF MeasResult2EUTRA-v1250

MeasResult2EUTRA-r9 ::=             SEQUENCE {
    carrierFreq-r9                      ARFCN-ValueEUTRA,
    measResultList-r9                   MeasResultListEUTRA
}

MeasResult2EUTRA-v9e0 ::=               SEQUENCE {
    carrierFreq-v9e0                    ARFCN-ValueEUTRA-v9e0       OPTIONAL
}

MeasResult2EUTRA-v1250 ::=              SEQUENCE {
    rsrq-Type-r12                       RSRQ-Type-r12       OPTIONAL
}

MeasResultList2UTRA-r9 ::=          SEQUENCE (SIZE (1..maxFreq)) OF MeasResult2UTRA-r9

MeasResult2UTRA-r9 ::=              SEQUENCE {
    carrierFreq-r9                      ARFCN-ValueUTRA,
    measResultList-r9                   MeasResultListUTRA
}

MeasResultList2CDMA2000-r9 ::=      SEQUENCE (SIZE (1..maxFreq)) OF MeasResult2CDMA2000-r9

MeasResult2CDMA2000-r9 ::=          SEQUENCE {
    carrierFreq-r9                      CarrierFreqCDMA2000,
    measResultList-r9                   MeasResultsCDMA2000
}

LogMeasReport-r10 ::=               SEQUENCE {
    absoluteTimeStamp-r10               AbsoluteTimeInfo-r10,
    traceReference-r10                  TraceReference-r10,
    traceRecordingSessionRef-r10        OCTET STRING (SIZE (2)),
```


DAINGEAN_0002067

```
    tce-Id-r10                          OCTET STRING (SIZE (1)),
    logMeasInfoList-r10                 LogMeasInfoList-r10,
    logMeasAvailable-r10                ENUMERATED {true}               OPTIONAL,
    ...
}

LogMeasInfoList-r10 ::=         SEQUENCE (SIZE (1..maxLogMeasReport-r10)) OF LogMeasInfo-r10

LogMeasInfo-r10 ::=         SEQUENCE {
    locationInfo-r10                    LocationInfo-r10        OPTIONAL,
    relativeTimeStamp-r10               INTEGER (0..7200),
    servCellIdentity-r10                CellGlobalIdEUTRA,
    measResultServCell-r10              SEQUENCE {
        rsrpResult-r10                      RSRP-Range,
        rsrqResult-r10                      RSRQ-Range
    },
    measResultNeighCells-r10            SEQUENCE {
        measResultListEUTRA-r10             MeasResultList2EUTRA-r9     OPTIONAL,
        measResultListUTRA-r10              MeasResultList2UTRA-r9      OPTIONAL,
        measResultListGERAN-r10             MeasResultList2GERAN-r10    OPTIONAL,
        measResultListCDMA2000-r10          MeasResultList2CDMA2000-r9  OPTIONAL
    }   OPTIONAL,
    ...,
    [[  measResultListEUTRA-v1090           MeasResultList2EUTRA-v9e0   OPTIONAL
    ]],
    [[  measResultListMBSFN-r12             MeasResultListMBSFN-r12 OPTIONAL,
        measResultServCell-v1250            RSRQ-Range-v1250            OPTIONAL,
        servCellRSRQ-Type-r12               RSRQ-Type-r12               OPTIONAL,
        measResultListEUTRA-v1250           MeasResultList2EUTRA-v1250  OPTIONAL
    ]],
    [[  inDeviceCoexDetected-r13            ENUMERATED {true}           OPTIONAL
    ]]
}

MeasResultListMBSFN-r12 ::=             SEQUENCE (SIZE (1..maxMBSFN-Area)) OF MeasResultMBSFN-r12

MeasResultMBSFN-r12 ::=             SEQUENCE {
    mbsfn-Area-r12                          SEQUENCE {
        mbsfn-AreaId-r12                        MBSFN-AreaId-r12,
        carrierFreq-r12                         ARFCN-ValueEUTRA-r9
    },
    rsrpResultMBSFN-r12                     RSRP-Range,
    rsrqResultMBSFN-r12                     MBSFN-RSRQ-Range-r12,
    signallingBLER-Result-r12               BLER-Result-r12             OPTIONAL,
    dataBLER-MCH-ResultList-r12             DataBLER-MCH-ResultList-r12 OPTIONAL,
    ...
}

DataBLER-MCH-ResultList-r12 ::=         SEQUENCE (SIZE (1.. maxPMCH-PerMBSFN)) OF DataBLER-MCH-
Result-r12

DataBLER-MCH-Result-r12 ::=             SEQUENCE {
    mch-Index-r12                           INTEGER (1..maxPMCH-PerMBSFN),
    dataBLER-Result-r12                     BLER-Result-r12
}

BLER-Result-r12 ::=                 SEQUENCE {
    bler-r12                                BLER-Range-r12,
    blocksReceived-r12                      SEQUENCE {
        n-r12                                   BIT STRING (SIZE (3)),
        m-r12                                   BIT STRING (SIZE (8))
    }
}

BLER-Range-r12 ::=                      INTEGER(0..31)

MeasResultList2GERAN-r10 ::=            SEQUENCE (SIZE (1..maxCellListGERAN)) OF MeasResultListGERAN

ConnEstFailReport-r11 ::=               SEQUENCE {
    failedCellId-r11                    CellGlobalIdEUTRA,
    locationInfo-r11                    LocationInfo-r10                OPTIONAL,
    measResultFailedCell-r11                SEQUENCE {
        rsrpResult-r11                          RSRP-Range,
        rsrqResult-r11                          RSRQ-Range              OPTIONAL
    },
    measResultNeighCells-r11                SEQUENCE {
        measResultListEUTRA-r11             MeasResultList2EUTRA-r9         OPTIONAL,
        measResultListUTRA-r11              MeasResultList2UTRA-r9          OPTIONAL,
```


DAINGEAN_0002068

```
        measResultListGERAN-r11             MeasResultListGERAN             OPTIONAL,
        measResultsCDMA2000-r11             MeasResultList2CDMA2000-r9      OPTIONAL
    }   OPTIONAL,
    numberOfPreamblesSent-r11           NumberOfPreamblesSent-r11,
    contentionDetected-r11              BOOLEAN,
    maxTxPowerReached-r11               BOOLEAN,
    timeSinceFailure-r11                TimeSinceFailure-r11,
    measResultListEUTRA-v1130           MeasResultList2EUTRA-v9e0       OPTIONAL,
    ...,
    [[  measResultFailedCell-v1250      RSRQ-Range-v1250                OPTIONAL,
        failedCellRSRQ-Type-r12         RSRQ-Type-r12                   OPTIONAL,
        measResultListEUTRA-v1250       MeasResultList2EUTRA-v1250      OPTIONAL
    ]]
}

NumberOfPreamblesSent-r11::=            INTEGER (1..200)

TimeSinceFailure-r11 ::=                INTEGER (0..172800)

MobilityHistoryReport-r12 ::=   VisitedCellInfoList-r12

-- ASN1STOP
```


DAINGEAN_0002069

UEInformationResponse field descriptions
absoluteTimeStamp Indicates the absolute time when the logged measurement configuration logging is provided, as indicated by E-UTRAN within *absoluteTimeInfo*.
bler Indicates the measured BLER value. The coding of BLER value is defined in TS 36.133 [16].
blocksReceived Indicates total number of MCH blocks, which were received by the UE and used for the corresponding BLER calculation, within the measurement period as defined in TS 36.133 [16].
carrierFreq In case the UE includes *carrierFreq-v9e0* and/ or *carrierFreq-v1090*, the UE shall set the corresponding entry of *carrierFreq-r9* and/ or *carrierFreq-r10* respectively to *maxEARFCN*. For E-UTRA and UTRA frequencies, the UE sets the ARFCN according to the band used when obtaining the concerned measurement results.
connectionFailureType This field is used to indicate whether the connection failure is due to radio link failure or handover failure.
contentionDetected This field is used to indicate that contention was detected for at least one of the transmitted preambles, see TS 36.321 [6].
c-RNTI This field indicates the C-RNTI used in the PCell upon detecting radio link failure or the C-RNTI used in the source PCell upon handover failure.
dataBLER-MCH-ResultList Includes a BLER result per MCH on subframes using *dataMCS*, with the applicable MCH(s) listed in the same order as in *pmch-InfoList* within *MBSFNAreaConfiguration*.
drb-EstablishedWithQCI-1 This field is used to indicate the radio link failure occurred while a bearer with QCI value equal to 1 was configured, see TS 24.301 [35].
failedCellId This field is used to indicate the cell in which connection establishment failed.
failedPCellId This field is used to indicate the PCell in which RLF is detected or the target PCell of the failed handover. The UE sets the EARFCN according to the band used for transmission/ reception when the failure occurred.
inDeviceCoexDetected Indicates that measurement logging is suspended due to IDC problem detection.
maxTxPowerReached This field is used to indicate whether or not the maximum power level was used for the last transmitted preamble, see TS 36.321 [6].
mch-Index Indicates the MCH by referring to the entry as listed in *pmch-InfoList* within *MBSFNAreaConfiguration*.
measResultFailedCell This field refers to the last measurement results taken in the cell, where connection establishment failure happened.
measResultLastServCell This field refers to the last measurement results taken in the PCell, where radio link failure or handover failure happened.
measResultListEUTRA If *measResultListEUTRA-v9e0*, *measResultListEUTRA-v1090* or *measResultListEUTRA-v1130* is included, the UE shall include the same number of entries, and listed in the same order, as in *measResultListEUTRA-r9*, *measResultListEUTRA-r10* and/ or *measResultListEUTRA-r11* respectively.
measResultListEUTRA-v1250 If included in *RLF-Report-r9* the UE shall include the same number of entries, and listed in the same order, as in *measResultListEUTRA-r9*; If included in *LogMeasInfo-r10* the UE shall include the same number of entries, and listed in the same order, as in *measResultListEUTRA-r10*; If included in *ConnEstFailReport-r11* the UE shall include the same number of entries, and listed in the same order, as in *measResultListEUTRA-r11*;
mobilityHistoryReport This field is used to indicate the time of stay in 16 most recently visited E-UTRA cells or of stay out of E-UTRA.
numberOfPreamblesSent This field is used to indicate the number of RACH preambles that were transmitted. Corresponds to parameter PREAMBLE_TRANSMISSION_COUNTER in TS 36.321 [6].
previousPCellId This field is used to indicate the source PCell of the last handover (source PCell when the last *RRC-Connection-Reconfiguration* message including *mobilityControlInfo*was received).

DAINGEAN_0002070

UEInformationResponse field descriptions
previousUTRA-CellId This field is used to indicate the source UTRA cell of the last successful handover to E-UTRAN, when RLF occurred at the target PCell. The UE sets the ARFCN according to the band used for transmission/ reception on the concerned cell.
reestablishmentCellId This field is used to indicate the cell in which the re-establishment attempt was made after connection failure.
relativeTimeStamp Indicates the time of logging measurement results, measured relative to the *absoluteTimeStamp*. Value in seconds.
rlf-Cause This field is used to indicate the cause of the last radio link failure that was detected. In case of handover failure information reporting (i.e., the *connectionFailureType* is set to '*hof*'), the UE is allowed to set this field to any value.
selectedUTRA-CellId This field is used to indicate the UTRA cell that the UE selects after RLF is detected, while T311 is running. The UE sets the ARFCN according to the band selected for transmission/ reception on the concerned cell.
signallingBLER-Result Includes a BLER result of MBSFN subframes using *signallingMCS*.
tac-FailedPCell This field is used to indicate the Tracking Area Code of the PCell in which RLF is detected.
tce-Id Parameter Trace Collection Entity Id: See TS 32.422 [58].
timeConnFailure This field is used to indicate the time elapsed since the last HO initialization until connection failure. Actual value = field value * 100ms. The maximum value 1023 means 102.3s or longer.
timeSinceFailure This field is used to indicate the time that elapsed since the connection (establishment) failure. Value in seconds. The maximum value 172800 means 172800s or longer.
traceRecordingSessionRef Parameter Trace Recording Session Reference: See TS 32.422 [58].

– *ULHandoverPreparationTransfer (CDMA2000)*

The *ULHandoverPreparationTransfer* message is used for the uplink transfer of handover related CDMA2000 information when requested by the higher layers.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

ULHandoverPreparationTransfer message

```
-- ASN1START

ULHandoverPreparationTransfer ::=   SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            ulHandoverPreparationTransfer-r8        ULHandoverPreparationTransfer-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture                SEQUENCE {}
    }
}

ULHandoverPreparationTransfer-r8-IEs ::= SEQUENCE {
    cdma2000-Type                       CDMA2000-Type,
    meid                                BIT STRING (SIZE (56))  OPTIONAL,
    dedicatedInfo                       DedicatedInfoCDMA2000,
    nonCriticalExtension                ULHandoverPreparationTransfer-v8a0-IEs  OPTIONAL
}

ULHandoverPreparationTransfer-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}
```


DAINGEAN_0002071

```
-- ASN1STOP
```

ULHandoverPreparationTransfer field descriptions
meid
The 56 bit mobile identification number provided by the CDMA2000 Upper layers.

– *ULInformationTransfer*

The *ULInformationTransfer* message is used for the uplink transfer of NAS or non-3GPP dedicated information.

Signalling radio bearer: SRB2 or SRB1(only if SRB2 not established yet). If SRB2 is suspended, the UE does not send this message until SRB2 is resumed

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

ULInformationTransfer message

```
-- ASN1START

ULInformationTransfer ::=           SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            ulInformationTransfer-r8            ULInformationTransfer-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

ULInformationTransfer-r8-IEs ::=    SEQUENCE {
    dedicatedInfoType           CHOICE {
        dedicatedInfoNAS                DedicatedInfoNAS,
        dedicatedInfoCDMA2000-1XRTT     DedicatedInfoCDMA2000,
        dedicatedInfoCDMA2000-HRPD      DedicatedInfoCDMA2000
    },
    nonCriticalExtension            ULInformationTransfer-v8a0-IEs
    OPTIONAL
}

ULInformationTransfer-v8a0-IEs ::= SEQUENCE {
    lateNonCriticalExtension        OCTET STRING                    OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

– *WLANConnectionStatusReport*

The *WLANConnectionStatusReport* message is used to inform the successful connection to WLAN or failure of the WLAN connection or connection attempt(s).

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

WLANConnectionStatusReport message

```
-- ASN1START
```


DAINGEAN_0002072

```
WLANConnectionStatusReport-r13 ::=  SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            wlanConnectionStatusReport-r13  WLANConnectionStatusReport-r13-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

WLANConnectionStatusReport-r13-IEs ::=  SEQUENCE {
    wlan-Status-r13                 WLAN-Status-r13,
    lateNonCriticalExtension        OCTET STRING                        OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

WLANConnectionStatusReport field descriptions

wlan-Status
Indicates the connection status to WLAN and the cause of failures.

6.3 RRC information elements

6.3.1 System information blocks

– *SystemInformationBlockType2*

The IE *SystemInformationBlockType2* contains radio resource configuration information that is common for all UEs.

NOTE: UE timers and constants related to functionality for which parameters are provided in another SIB are included in the corresponding SIB.

SystemInformationBlockType2 information element

```
-- ASN1START

SystemInformationBlockType2 ::=     SEQUENCE {
    ac-BarringInfo                      SEQUENCE {
        ac-BarringForEmergency              BOOLEAN,
        ac-BarringForMO-Signalling          AC-BarringConfig                OPTIONAL,   -- Need OP
        ac-BarringForMO-Data                AC-BarringConfig                OPTIONAL    -- Need OP
    }                                                                       OPTIONAL,   -- Need OP
    radioResourceConfigCommon           RadioResourceConfigCommonSIB,
    ue-TimersAndConstants               UE-TimersAndConstants,
    freqInfo                            SEQUENCE {
        ul-CarrierFreq                      ARFCN-ValueEUTRA                OPTIONAL,   -- Need OP
        ul-Bandwidth                        ENUMERATED {n6, n15, n25, n50, n75, n100}
                                                                            OPTIONAL,   -- Need OP
        additionalSpectrumEmission          AdditionalSpectrumEmission
    },
    mbsfn-SubframeConfigList            MBSFN-SubframeConfigList            OPTIONAL,   -- Need OR
    timeAlignmentTimerCommon            TimeAlignmentTimer,
    ...,
    lateNonCriticalExtension        OCTET STRING (CONTAINING SystemInformationBlockType2-v8h0-IEs)
                        OPTIONAL,
    [[  ssac-BarringForMMTEL-Voice-r9       AC-BarringConfig                OPTIONAL,   -- Need OP
        ssac-BarringForMMTEL-Video-r9       AC-BarringConfig                OPTIONAL    -- Need OP
    ]],
    [[  ac-BarringForCSFB-r10               AC-BarringConfig            OPTIONAL    -- Need OP
    ]],
    [[  ac-BarringSkipForMMTELVoice-r12     ENUMERATED {true}           OPTIONAL,    -- Need OP
        ac-BarringSkipForMMTELVideo-r12     ENUMERATED {true}           OPTIONAL,    -- Need OP
        ac-BarringSkipForSMS-r12            ENUMERATED {true}           OPTIONAL,    -- Need OP
        ac-BarringPerPLMN-List-r12          AC-BarringPerPLMN-List-r12  OPTIONAL    -- Need OP
    ]],
    [[  voiceServiceCauseIndication-r12     ENUMERATED {true}           OPTIONAL    -- Need OP
    ]],
    [[  acdc-BarringForCommon-r13           ACDC-BarringForCommon-r13       OPTIONAL,   -- Need OP
```


DAINGEAN_0002073

```
        acdc-BarringPerPLMN-List-r13        ACDC-BarringPerPLMN-List-r13    OPTIONAL    -- Need OP
    ]],
    [[
        udt-RestrictingForCommon-r13            UDT-Restricting-r13             OPTIONAL,   -- Need
OR
        udt-RestrictingPerPLMN-List-r13     UDT-RestrictingPerPLMN-List-r13 OPTIONAL,   -- Need OR
        cIoT-EPS-OptimisationInfo-r13       CIOT-EPS-OptimisationInfo-r13   OPTIONAL,   -- Need OP
        useFullResumeID-r13                 ENUMERATED {true}               OPTIONAL    -- Need OP
    ]]

}

SystemInformationBlockType2-v8h0-IEs ::=    SEQUENCE {
    multiBandInfoList               SEQUENCE (SIZE (1..maxMultiBands)) OF AdditionalSpectrumEmission
    OPTIONAL,   -- Need OR
    nonCriticalExtension            SystemInformationBlockType2-v9e0-IEs    OPTIONAL
}

SystemInformationBlockType2-v9e0-IEs ::= SEQUENCE {
    ul-CarrierFreq-v9e0                 ARFCN-ValueEUTRA-v9e0       OPTIONAL,   -- Cond ul-FreqMax
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

AC-BarringConfig ::=                SEQUENCE {
    ac-BarringFactor                    ENUMERATED {
                                            p00, p05, p10, p15, p20, p25, p30, p40,
                                            p50, p60, p70, p75, p80, p85, p90, p95},
    ac-BarringTime                      ENUMERATED {s4, s8, s16, s32, s64, s128, s256, s512},
    ac-BarringForSpecialAC              BIT STRING (SIZE(5))
}

MBSFN-SubframeConfigList ::=        SEQUENCE (SIZE (1..maxMBSFN-Allocations)) OF MBSFN-
SubframeConfig

AC-BarringPerPLMN-List-r12 ::=      SEQUENCE (SIZE (1.. maxPLMN-r11)) OF AC-BarringPerPLMN-r12

AC-BarringPerPLMN-r12 ::=           SEQUENCE {
    plmn-IdentityIndex-r12              INTEGER (1..maxPLMN-r11),
    ac-BarringInfo-r12                  SEQUENCE {
        ac-BarringForEmergency-r12      BOOLEAN,
        ac-BarringForMO-Signalling-r12      AC-BarringConfig    OPTIONAL,   -- Need OP
        ac-BarringForMO-Data-r12            AC-BarringConfig    OPTIONAL    -- Need OP
    }                                                           OPTIONAL,   -- Need OP
    ac-BarringSkipForMMTELVoice-r12     ENUMERATED {true}       OPTIONAL,   -- Need OP
    ac-BarringSkipForMMTELVideo-r12     ENUMERATED {true}       OPTIONAL,   -- Need OP
    ac-BarringSkipForSMS-r12            ENUMERATED {true}       OPTIONAL,   -- Need OP
    ac-BarringForCSFB-r12               AC-BarringConfig        OPTIONAL,   -- Need OP
    ssac-BarringForMMTEL-Voice-r12      AC-BarringConfig        OPTIONAL,   -- Need OP
    ssac-BarringForMMTEL-Video-r12      AC-BarringConfig        OPTIONAL    -- Need OP
}

ACDC-BarringForCommon-r13 ::=           SEQUENCE {
    acdc-HPLMNonly-r13                  BOOLEAN,
    barringPerACDC-CategoryList-r13             BarringPerACDC-CategoryList-r13
}

ACDC-BarringPerPLMN-List-r13 ::=        SEQUENCE (SIZE (1.. maxPLMN-r11)) OF ACDC-BarringPerPLMN-r13

ACDC-BarringPerPLMN-r13 ::=         SEQUENCE {
    plmn-IdentityIndex-r13              INTEGER (1..maxPLMN-r11),
    acdc-OnlyForHPLMN-r13               BOOLEAN,
    barringPerACDC-CategoryList-r13         BarringPerACDC-CategoryList-r13
}

BarringPerACDC-CategoryList-r13 ::= SEQUENCE (SIZE (1..maxACDC-Cat-r13)) OF BarringPerACDC-Category-
r13

BarringPerACDC-Category-r13 ::= SEQUENCE {
    acdc-Category-r13               INTEGER (1..maxACDC-Cat-r13),
    acdc-BarringConfig-r13          SEQUENCE {
        ac-BarringFactor-r13            ENUMERATED {
                                            p00, p05, p10, p15, p20, p25, p30, p40,
                                            p50, p60, p70, p75, p80, p85, p90, p95},
        ac-BarringTime-r13              ENUMERATED {s4, s8, s16, s32, s64, s128, s256, s512}
    }                                       OPTIONAL    -- Need OP
}

UDT-Restricting-r13 ::= SEQUENCE {
```


DAINGEAN_0002074

```
    udt-Restricting-r13                 ENUMERATED {true}           OPTIONAL, --Need OR
    udt-RestrictingTime-r13             ENUMERATED {s4, s8, s16, s32, s64, s128, s256, s512}
OPTIONAL --Need OR
}

UDT-RestrictingPerPLMN-List-r13 ::=     SEQUENCE (SIZE (1..maxPLMN-r11)) OF UDT-RestrictingPerPLMN-
r13

UDT-RestrictingPerPLMN-r13 ::= SEQUENCE {
    plmn-IdentityIndex-r13                  INTEGER (1..maxPLMN-r11),
    udt-Restricting-r13                     UDT-Restricting-r13     OPTIONAL    --Need OR
}

CIOT-EPS-OptimisationInfo-r13 ::=   SEQUENCE (SIZE (1.. maxPLMN-r11)) OF CIOT-OptimisationPLMN-r13

CIOT-OptimisationPLMN-r13::= SEQUENCE {
        up-CIoT-EPS-Optimisation-r13        ENUMERATED {true}           OPTIONAL,   -- Need OP
        cp-CIoT-EPS-Optimisation-r13        ENUMERATED {true}           OPTIONAL,   -- Need OP
        attachWithoutPDN-Connectivity-r13   ENUMERATED {true}           OPTIONAL    -- Need OP
}

-- ASN1STOP
```


DAINGEAN_0002075

SystemInformationBlockType2 field descriptions
ac-BarringFactor If the random number drawn by the UE is lower than this value, access is allowed. Otherwise the access is barred. The values are interpreted in the range [0,1): p00 = 0, p05 = 0.05, p10 = 0.10,..., p95 = 0.95. Values other than p00 can only be set if all bits of the corresponding *ac-BarringForSpecialAC* are set to 0.
ac-BarringForCSFB Access class barring for mobile originating CS fallback.
ac-BarringForEmergency Access class barring for AC 10.
ac-BarringForMO-Data Access class barring for mobile originating calls.
ac-BarringForMO-Signalling Access class barring for mobile originating signalling.
ac-BarringForSpecialAC Access class barring for AC 11-15. The first/ leftmost bit is for AC 11, the second bit is for AC 12, and so on.
ac-BarringTime Mean access barring time value in seconds.
acdc-BarringConfig Barring configuration for an ACDC category. If the field is absent, access to the cell is considered as not barred for the ACDC category in accordance with subclause 5.3.3.13.
acdc-Category Indicates the ACDC category as defined in TS 24.105 [72].
acdc-OnlyForHPLMN Indicates whether ACDC is applicable for UEs not in their HPLMN for the corresponding PLMN. *TRUE* indicates that ACDC is applicable only for UEs in their HPLMN for the corresponding PLMN. *FALSE* indicates that ACDC is applicable for both UEs in their HPLMN and UEs not in their HPLMN for the corresponding PLMN.
additionalSpectrumEmission The UE requirements related to IE *AdditionalSpectrumEmission* are defined in TS 36.101 [42, table 6.2.4-1]. NOTE 1.
attachWithoutPDN-Connectivity If present, the field indicates that attach without PDN connectivity as specified in TS 24.301 [35] is supported for this PLMN.
barringPerACDC-CategoryList A list of barring information per ACDC category according to the order defined in TS 22.011 [10]. The first entry in the list corresponds to the highest ACDC category of which applications are the least restricted in access attempts at a cell, the second entry in the list corresponds to the ACDC category of which applications are restricted more than applications of the highest ACDC category in access attempts at a cell, and so on. The last entry in the list corresponds to the lowest ACDC category of which applications are the most restricted in access attempts at a cell.
cp-CIoT-EPS-Optimisation This field indicates if the UE is allowed to establish the connection with Control plane CIoT EPS Optimisation, see TS 24.301 [35].
mbsfn-SubframeConfigList Defines the subframes that are reserved for MBSFN in downlink. NOTE 1.
multiBandInfoList A list of *AdditionalSpectrumEmission* i.e. one for each additional frequency band included in *multiBandInfoList* in *SystemInformationBlockType1*, listed in the same order.
plmn-IdentityIndex Index of the PLMN in *plmn-IdentityList* included in SIB1. Value 1 indicates the PLMN listed 1st in *plmn-IdentityList* included in SIB1. Value 2 indicates the PLMN listed 2nd in *plmn-IdentityList* included in SIB1 and so on. NOTE 1.
ssac-BarringForMMTEL-Video Service specific access class barring for MMTEL video originating calls.
ssac-BarringForMMTEL-Voice Service specific access class barring for MMTEL voice originating calls.
udt-Restricting Value TRUE indicates that the UE should indicate to the higher layers to restrict unattended data traffic TS 22.101 [77] irrespective of the UE being in RRC_IDLE or RRC_CONNECTED. The UE shall not indicate to the higher layers if the UE has one or more Access Classes, as stored on the USIM, with a value in the range 11..15, which is valid for the UE to use according to TS 22.011 [10] and TS 23.122 [11].
udt-RestrictingTime If present and when the *udt-Restricting* changes from TRUE, the UE runs a timer for a period equal to rand * *udt-RestrictingTime*, where rand is a random number drawn that is uniformly distributed in the range 0 ≤ rand < 1 value in seconds. The timer stops if *udt-Restricting* changes to TRUE. Upon timer expiry, the UE indicates to the higher layers that the restriction is alleviated.
ul-Bandwidth Parameter: transmission bandwidth configuration, N_{RB}, in uplink, see TS 36.101 [42, table 5.6-1]. Value n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on. If for FDD this parameter is absent, the uplink bandwidth is equal to the downlink bandwidth. For TDD this parameter is absent and it is equal to the downlink bandwidth. NOTE 1.

DAINGEAN_0002076

SystemInformationBlockType2 field descriptions
ul-CarrierFreq For FDD: If absent, the (default) value determined from the default TX-RX frequency separation defined in TS 36.101 [42, table 5.7.3-1] applies. For TDD: This parameter is absent and it is equal to the downlink frequency. NOTE 1.
up-CIoT-EPS-Optimisation This field indicates if the UE is allowed to resume the connection with User plane CIoT EPS Optimisation, see TS 24.301 [35].
useFullResumeID This field indicates if the UE indicates full resume ID of 40 bits in *RRCConnectionResumeRequest*.
voiceServiceCauseIndication Indicates whether UE is requested to use the establishment cause *mo-VoiceCall* for mobile originating MMTEL voice calls.

Conditional presence	Explanation
ul-FreqMax	The field is mandatory present if *ul-CarrierFreq* (i.e. without suffix) is present and set to *maxEARFCN*. Otherwise the field is not present.

NOTE 1: E-UTRAN sets this field to the same value for all instances of SI message that are broadcasted within the same cell.

– *SystemInformationBlockType3*

The IE *SystemInformationBlockType3* contains cell re-selection information common for intra-frequency, inter-frequency and/ or inter-RAT cell re-selection (i.e. applicable for more than one type of cell re-selection but not necessarily all) as well as intra-frequency cell re-selection information other than neighbouring cell related.

SystemInformationBlockType3 information element

```
-- ASN1START

SystemInformationBlockType3 ::=     SEQUENCE {
    cellReselectionInfoCommon           SEQUENCE {
        q-Hyst                              ENUMERATED {
                                                dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10,
                                                dB12, dB14, dB16, dB18, dB20, dB22, dB24},
        speedStateReselectionPars           SEQUENCE {
            mobilityStateParameters             MobilityStateParameters,
            q-HystSF                            SEQUENCE {
                sf-Medium                           ENUMERATED {
                                                        dB-6, dB-4, dB-2, dB0},
                sf-High                             ENUMERATED {
                                                        dB-6, dB-4, dB-2, dB0}
            }
        }                                                               OPTIONAL        -- Need OP
    },
    cellReselectionServingFreqInfo      SEQUENCE {
        s-NonIntraSearch                    ReselectionThreshold        OPTIONAL,       -- Need OP
        threshServingLow                    ReselectionThreshold,
        cellReselectionPriority             CellReselectionPriority
    },
    intraFreqCellReselectionInfo        SEQUENCE {
        q-RxLevMin                          Q-RxLevMin,
        p-Max                               P-Max                       OPTIONAL,       -- Need OP
        s-IntraSearch                       ReselectionThreshold        OPTIONAL,       -- Need OP
        allowedMeasBandwidth                AllowedMeasBandwidth        OPTIONAL,       -- Need OP
        presenceAntennaPort1                PresenceAntennaPort1,
        neighCellConfig                     NeighCellConfig,
        t-ReselectionEUTRA                  T-Reselection,
        t-ReselectionEUTRA-SF               SpeedStateScaleFactors      OPTIONAL        -- Need OP
    },
    ...,
    lateNonCriticalExtension                OCTET STRING (CONTAINING SystemInformationBlockType3-
v10j0-IEs)  OPTIONAL,
    [[  s-IntraSearch-v920                  SEQUENCE {
            s-IntraSearchP-r9                   ReselectionThreshold,
            s-IntraSearchQ-r9                   ReselectionThresholdQ-r9
        }                                                               OPTIONAL,       -- Need OP
```


DAINGEAN_0002077

```
        s-NonIntraSearch-v920               SEQUENCE {
            s-NonIntraSearchP-r9                ReselectionThreshold,
            s-NonIntraSearchQ-r9                ReselectionThresholdQ-r9
        }                                                       OPTIONAL,       -- Need OP
        q-QualMin-r9                        Q-QualMin-r9        OPTIONAL,       -- Need OP
        threshServingLowQ-r9                ReselectionThresholdQ-r9    OPTIONAL        -- Need OP
    ]],
    [[  q-QualMinWB-r11                     Q-QualMin-r9                OPTIONAL    -- Cond WB-RSRQ
    ]],
    [[  q-QualMinRSRQ-OnAllSymbols-r12          Q-QualMin-r9                OPTIONAL            --
Cond RSRQ
    ]],
    [[  cellReselectionServingFreqInfo-v1310 CellReselectionServingFreqInfo-v1310   OPTIONAL,     --
Need OP
        redistributionServingInfo-r13           RedistributionServingInfo-r13 OPTIONAL, --Need OR
        cellSelectionInfoCE-r13                 CellSelectionInfoCE-r13     OPTIONAL,       -- Need
OP
        t-ReselectionEUTRA-CE-r13               T-ReselectionEUTRA-CE-r13   OPTIONAL        -- Need
OP
        ]]
}

RedistributionServingInfo-r13 ::=       SEQUENCE {
    redistributionFactorServing-r13     INTEGER(0..10),
    redistributionFactorCell-r13        ENUMERATED{true}                OPTIONAL,   --Need OP
    t360-r13                            ENUMERATED {min4, min8, min16, min32,infinity,
                                            spare3,spare2,spare1},
    redistrOnPagingOnly-r13             ENUMERATED {true}       OPTIONAL    --Need OP
}

CellReselectionServingFreqInfo-v1310 ::=    SEQUENCE {
    cellReselectionSubPriority-r13              CellReselectionSubPriority-r13
}

-- Late non critical extensions
SystemInformationBlockType3-v10j0-IEs ::= SEQUENCE {
    freqBandInfo-r10                    NS-PmaxList-r10             OPTIONAL,   -- Need OR
    multiBandInfoList-v10j0             MultiBandInfoList-v10j0     OPTIONAL,   -- Need OR
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

-- ASN1STOP
```


DAINGEAN_0002078

SystemInformationBlockType3 field descriptions
allowedMeasBandwidth If absent, the value corresponding to the downlink bandwidth indicated by the *dl-Bandwidth* included in *MasterInformationBlock* applies.
cellSelectionInfoCE Parameters included in coverage enhancement S criteria. They may be used by the UE to select/reselect a cell in which it works in CE mode on the concerned non serving frequency. If absent, the UE acquires the information from the target cell on the concerned frequency.
cellReselectionInfoCommon Cell re-selection information common for cells.
cellReselectionServingFreqInfo Information common for Cell re-selection to inter-frequency and inter-RAT cells.
freqBandInfo A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] applicable for the intra-frequency neighouring E-UTRA cells if the UE selects the frequenby band from *freqBandIndicator* in *SystemInformationBlockType1*.
intraFreqcellReselectionInfo Cell re-selection information common for intra-frequency cells.
multiBandInfoList-v10j0 A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] applicable for the intra-frequency neighouring E-UTRA cells if the UE selects the frequenby bands in *multiBandInfoList* (i.e. without suffix) or *multiBandInfoList-v9e0*. If E-UTRAN includes *multiBandInfoList-v10j0*, it includes the same number of entries, and listed in the same order, as in *multiBandInfoList* (i.e. without suffix).
p-Max Value applicable for the intra-frequency neighbouring E-UTRA cells. If absent the UE applies the maximum power according to the UE capability.
redistrOnPagingOnly If this field is present and the UE is redistribution capable, the UE shall only wait for the paging message to trigger E-UTRAN inter-frequency redistribution procedure as specified in 5.2.4.10 of TS 36.304 [4].
q-Hyst Parameter Q_{hyst} in TS 36.304 [4], Value in dB. Value dB1 corresponds to 1 dB, dB2 corresponds to 2 dB and so on.
q-HystSF Parameter "Speed dependent ScalingFactor for Q_{hyst}" in TS 36.304 [4]. The sf-Medium and sf-High concern the additional hysteresis to be applied, in Medium and High Mobility state respectively, to Q_{hyst} as defined in TS 36.304 [4]. In dB. Value dB-6 corresponds to -6dB, dB-4 corresponds to -4dB and so on.
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4], applicable for intra-frequency neighrbour cells. If the field is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$. NOTE 1.
q-QualMinRSRQ-OnAllSymbols If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, perform RSRQ measurement on all OFDM symbols in accordance with TS 36.214 [48]. NOTE 1.
q-QualMinWB If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, use a wider bandwidth in accordance with TS 36.133 [16]. NOTE 1.
q-RxLevMin Parameter "$Q_{rxlevmin}$" in TS 36.304 [4], applicable for intra-frequency neighbour cells.
redistributionFactorCell If *redistributionFactorCell* is present, *redistributionFactorServing* is only applicable for the serving cell otherwise it is applicable for serving frequency
redistributionFactorServing Parameter *redistributionFactorServing* in TS 36.304 [4].
s-IntraSearch Parameter "$S_{IntraSearchP}$" in TS 36.304 [4]. If the field *s-IntraSearchP* is present, the UE applies the value of *s-IntraSearchP* instead. Otherwise if neither *s-IntraSearch* nor *s-IntraSearchP* is present, the UE applies the (default) value of infinity for $S_{IntraSearchP}$.
s-IntraSearchP Parameter "$S_{IntraSearchP}$" in TS 36.304 [4]. See descriptions under *s-IntraSearch*.
s-IntraSearchQ Parameter "$S_{IntraSearchQ}$" in TS 36.304 [4]. If the field is not present, the UE applies the (default) value of 0 dB for $S_{IntraSearchQ}$.
s-NonIntraSearch Parameter "$S_{nonIntraSearchP}$" in TS 36.304 [4]. If the field *s-NonIntraSearchP* is present, the UE applies the value of *s-NonIntraSearchP* instead. Otherwise if neither *s-NonIntraSearch* nor *s-NonIntraSearchP* is present, the UE applies the (default) value of infinity for $S_{nonIntraSearchP}$.
s-NonIntraSearchP Parameter "$S_{nonIntraSearchP}$" in TS 36.304 [4]. See descriptions under *s-NonIntraSearch*.

DAINGEAN_0002079

SystemInformationBlockType3 field descriptions
s-NonIntraSearchQ Parameter "$S_{nonIntraSearchQ}$" in TS 36.304 [4]. If the field is not present, the UE applies the (default) value of 0 dB for $S_{nonIntraSearchQ}$.
speedStateReselectionPars Speed dependent reselection parameters, see TS 36.304 [4]. If this field is absent, i.e, *mobilityStateParameters* is also not present, UE behaviour is specified in TS 36.304 [4].
t360 Parameter "T360" in TS 36.304 [4]. Value *min4* corresponds to 4 minutes, value *min8* corresponds to 8 minutes, and so on.
threshServingLow Parameter "$Thresh_{Serving, LowP}$" in TS 36.304 [4].
threshServingLowQ Parameter "$Thresh_{Serving, LowQ}$" in TS 36.304 [4].
t-ReselectionEUTRA Parameter "$Treselection_{EUTRA}$" in TS 36.304 [4].
t-ReselectionEUTRA-SF Parameter "Speed dependent ScalingFactor for $Treselection_{EUTRA}$" in TS 36.304 [4]. If the field is not present, the UE behaviour is specified in TS 36.304 [4].

NOTE 1: The value the UE applies for parameter "$Q_{qualmin}$" in TS 36.304 [4] depends on the *q-QualMin* fields signalled by E-UTRAN and supported by the UE. In case multiple candidate options are available, the UE shall select the highest priority candidate option according to the priority order indicated by the following table (top row is highest priority).

q-QualMinRSRQ-OnAllSymbols	q-QualMinWB	Value of parameter "$Q_{qualmin}$" in TS 36.304 [4]
Included	Included	*q-QualMinRSRQ-OnAllSymbols* – (*q-QualMin* – *q-QualMinWB*)
Included	Not included	*q-QualMinRSRQ-OnAllSymbols*
Not included	Included	*q-QualMinWB*
Not included	Not included	*q-QualMin*

Conditional presence	Explanation
RSRQ	The field is optionally present, Need OR, if *threshServingLowQ* is present in SIB3; otherwise it is not present.
WB-RSRQ	The field is optionally present, need OP if the measurement bandwidth indicated by *allowedMeasBandwidth* is 50 resource blocks or larger; otherwise it is not present.

– *SystemInformationBlockType4*

The IE *SystemInformationBlockType4* contains neighbouring cell related information relevant only for intra-frequency cell re-selection. The IE includes cells with specific re-selection parameters as well as blacklisted cells.

SystemInformationBlockType4 information element

```
-- ASN1START

SystemInformationBlockType4 ::=     SEQUENCE {
    intraFreqNeighCellList              IntraFreqNeighCellList      OPTIONAL,   -- Need OR
    intraFreqBlackCellList              IntraFreqBlackCellList              OPTIONAL,   -- Need OR
    csg-PhysCellIdRange                 PhysCellIdRange             OPTIONAL,   -- Cond CSG
    ...,
    lateNonCriticalExtension                OCTET STRING                OPTIONAL
}

IntraFreqNeighCellList ::=      SEQUENCE (SIZE (1..maxCellIntra)) OF IntraFreqNeighCellInfo

IntraFreqNeighCellInfo ::=      SEQUENCE {
    physCellId                          PhysCellId,
    q-OffsetCell                        Q-OffsetRange,
    ...
}

IntraFreqBlackCellList ::=      SEQUENCE (SIZE (1..maxCellBlack)) OF PhysCellIdRange

-- ASN1STOP
```


DAINGEAN_0002080

SystemInformationBlockType4 field descriptions
csg-PhysCellIdRange Set of physical cell identities reserved for CSG cells on the frequency on which this field was received. The received *csg-PhysCellIdRange* applies if less than 24 hours has elapsed since it was received and the UE is camped on a cell of the same primary PLMN where this field was received. The 3 hour validity restriction (section 5.2.1.3) does not apply to this field. The UE shall not apply any stored *csg-PhysCellIdRange* when it is in *any cell selection* state defined in TS 36.304 [4].
intraFreqBlackCellList List of blacklisted intra-frequency neighbouring cells.
intraFreqNeighbCellList List of intra-frequency neighbouring cells with specific cell re-selection parameters.
q-OffsetCell Parameter "$Qoffset_{s,n}$" in TS 36.304 [4].

Conditional presence	Explanation
CSG	This field is optional, need OP, for non-CSG cells, and mandatory for CSG cells.

– *SystemInformationBlockType5*

The IE *SystemInformationBlockType5* contains information relevant only for inter-frequency cell re-selection i.e. information about other E-UTRA frequencies and inter-frequency neighbouring cells relevant for cell re-selection. The IE includes cell re-selection parameters common for a frequency as well as cell specific re-selection parameters.

***SystemInformationBlockType5* information element**

```
-- ASN1START

SystemInformationBlockType5 ::=     SEQUENCE {
    interFreqCarrierFreqList            InterFreqCarrierFreqList,
    ...,
    lateNonCriticalExtension                OCTET STRING    (CONTAINING SystemInformationBlockType5-
v8h0-IEs)                   OPTIONAL,
    [[  interFreqCarrierFreqList-v1250  InterFreqCarrierFreqList-v1250      OPTIONAL,   -- Need OR
        interFreqCarrierFreqListExt-r12 InterFreqCarrierFreqListExt-r12     OPTIONAL    -- Need OR
    ]],
    [[  interFreqCarrierFreqListExt-v1280   InterFreqCarrierFreqListExt-v1280   OPTIONAL    -- Need
OR
    ]],
    [[  interFreqCarrierFreqList-v1310      InterFreqCarrierFreqList-v1310      OPTIONAL,   -- Need
OR
        interFreqCarrierFreqListExt-v1310   InterFreqCarrierFreqListExt-v1310   OPTIONAL    -- Need
OR
    ]]
}

SystemInformationBlockType5-v8h0-IEs ::=    SEQUENCE {
    interFreqCarrierFreqList-v8h0 SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo-v8h0
        OPTIONAL,  -- Need OP
    nonCriticalExtension            SystemInformationBlockType5-v9e0-IEs
    OPTIONAL
}

SystemInformationBlockType5-v9e0-IEs ::=    SEQUENCE {
    interFreqCarrierFreqList-v9e0   SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo-v9e0
            OPTIONAL,   -- Need OR
    nonCriticalExtension            SystemInformationBlockType5-v10j0-IEs   OPTIONAL
}

SystemInformationBlockType5-v10j0-IEs ::=   SEQUENCE {
    interFreqCarrierFreqList-v10j0  SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo-v10j0
                OPTIONAL,   -- Need OR
    nonCriticalExtension            SEQUENCE {}                     OPTIONAL
}

InterFreqCarrierFreqList ::=        SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo

InterFreqCarrierFreqList-v1250 ::=  SEQUENCE (SIZE (1.. maxFreq)) OF InterFreqCarrierFreqInfo-v1250
```


DAINGEAN_0002081

```
InterFreqCarrierFreqListExt-r12 ::= SEQUENCE (SIZE (1.. maxFreq)) OF InterFreqCarrierFreqInfo-r12

InterFreqCarrierFreqListExt-v1280 ::=   SEQUENCE (SIZE (1.. maxFreq)) OF InterFreqCarrierFreqInfo-
        v10j0

InterFreqCarrierFreqList-v1310 ::=  SEQUENCE (SIZE (1.. maxFreq)) OF InterFreqCarrierFreqInfo-v1310

InterFreqCarrierFreqListExt-v1310 ::=   SEQUENCE (SIZE (1.. maxFreq)) OF InterFreqCarrierFreqInfo-
        v1310

InterFreqCarrierFreqInfo ::=    SEQUENCE {
    dl-CarrierFreq                      ARFCN-ValueEUTRA,
    q-RxLevMin                          Q-RxLevMin,
    p-Max                               P-Max                           OPTIONAL,       -- Need OP
    t-ReselectionEUTRA                  T-Reselection,
    t-ReselectionEUTRA-SF               SpeedStateScaleFactors          OPTIONAL,       -- Need OP
    threshX-High                        ReselectionThreshold,
    threshX-Low                         ReselectionThreshold,
    allowedMeasBandwidth                AllowedMeasBandwidth,
    presenceAntennaPort1                PresenceAntennaPort1,
    cellReselectionPriority             CellReselectionPriority         OPTIONAL,       -- Need OP
    neighCellConfig                     NeighCellConfig,
    q-OffsetFreq                        Q-OffsetRange                   DEFAULT dB0,
    interFreqNeighCellList              InterFreqNeighCellList          OPTIONAL,       -- Need OR
    interFreqBlackCellList              InterFreqBlackCellList          OPTIONAL,       -- Need OR
    ...,
    [[  q-QualMin-r9                    Q-QualMin-r9                    OPTIONAL,       -- Need OP
        threshX-Q-r9                    SEQUENCE {
            threshX-HighQ-r9                ReselectionThresholdQ-r9,
            threshX-LowQ-r9                 ReselectionThresholdQ-r9
        }                                                               OPTIONAL        -- Cond RSRQ
    ]],
    [[  q-QualMinWB-r11                 Q-QualMin-r9                    OPTIONAL    -- Cond WB-RSRQ
    ]]
}

InterFreqCarrierFreqInfo-v8h0 ::=       SEQUENCE {
    multiBandInfoList                   MultiBandInfoList               OPTIONAL    -- Need OR
}

InterFreqCarrierFreqInfo-v9e0 ::=   SEQUENCE {
    dl-CarrierFreq-v9e0                 ARFCN-ValueEUTRA-v9e0   OPTIONAL,   -- Cond dl-FreqMax
    multiBandInfoList-v9e0              MultiBandInfoList-v9e0  OPTIONAL    -- Need OR
}

InterFreqCarrierFreqInfo-v10j0 ::=  SEQUENCE {
    freqBandInfo-r10                    NS-PmaxList-r10             OPTIONAL,   -- Need OR
    multiBandInfoList-v10j0             MultiBandInfoList-v10j0     OPTIONAL    -- Need OR
}

InterFreqCarrierFreqInfo-v1250 ::=      SEQUENCE {
    reducedMeasPerformance-r12      ENUMERATED {true}       OPTIONAL,       -- Need OP
    q-QualMinRSRQ-OnAllSymbols-r12  Q-QualMin-r9                    OPTIONAL    -- Cond RSRQ2
}

InterFreqCarrierFreqInfo-r12 ::=        SEQUENCE {
    dl-CarrierFreq-r12                  ARFCN-ValueEUTRA-r9,
    q-RxLevMin-r12                      Q-RxLevMin,
    p-Max-r12                           P-Max                           OPTIONAL,       -- Need OP
    t-ReselectionEUTRA-r12              T-Reselection,
    t-ReselectionEUTRA-SF-r12           SpeedStateScaleFactors          OPTIONAL,       -- Need OP
    threshX-High-r12                    ReselectionThreshold,
    threshX-Low-r12                     ReselectionThreshold,
    allowedMeasBandwidth-r12            AllowedMeasBandwidth,
    presenceAntennaPort1-r12            PresenceAntennaPort1,
    cellReselectionPriority-r12         CellReselectionPriority         OPTIONAL,       -- Need OP
    neighCellConfig-r12                 NeighCellConfig,
    q-OffsetFreq-r12                    Q-OffsetRange                   DEFAULT dB0,
    interFreqNeighCellList-r12          InterFreqNeighCellList          OPTIONAL,       -- Need OR
    interFreqBlackCellList-r12          InterFreqBlackCellList          OPTIONAL,       -- Need OR
    q-QualMin-r12                       Q-QualMin-r9                    OPTIONAL,       -- Need OP
    threshX-Q-r12                       SEQUENCE {
        threshX-HighQ-r12                   ReselectionThresholdQ-r9,
        threshX-LowQ-r12                    ReselectionThresholdQ-r9
    }                                                                   OPTIONAL,   -- Cond RSRQ
    q-QualMinWB-r12                     Q-QualMin-r9                    OPTIONAL,   -- Cond WB-RSRQ
    multiBandInfoList-r12               MultiBandInfoList-r11           OPTIONAL,   -- Need OR
    reducedMeasPerformance-r12          ENUMERATED {true}               OPTIONAL,   -- Need OP
```


DAINGEAN_0002082

```
    q-QualMinRSRQ-OnAllSymbols-r12      Q-QualMin-r9                    OPTIONAL,   -- Cond RSRQ2
...
}

InterFreqCarrierFreqInfo-v1310  ::= SEQUENCE {
    cellReselectionSubPriority-r13      CellReselectionSubPriority-r13      OPTIONAL,       -- Need
OP
    redistributionInterFreqInfo-r13     RedistributionInterFreqInfo-r13     OPTIONAL, --Need OP
    cellSelectionInfoCE-r13             CellSelectionInfoCE-r13         OPTIONAL,   -- Need OP
    t-ReselectionEUTRA-CE-r13           T-ReselectionEUTRA-CE-r13       OPTIONAL    -- Need OP
}

InterFreqNeighCellList ::=          SEQUENCE (SIZE (1..maxCellInter)) OF InterFreqNeighCellInfo

InterFreqNeighCellInfo ::=          SEQUENCE {
    physCellId                          PhysCellId,
    q-OffsetCell                        Q-OffsetRange
}

InterFreqBlackCellList ::=          SEQUENCE (SIZE (1..maxCellBlack)) OF PhysCellIdRange

RedistributionInterFreqInfo-r13 ::=     SEQUENCE {
    redistributionFactorFreq-r13            RedistributionFactor-r13    OPTIONAL,   --Need OP
    redistributionNeighCellList-r13         RedistributionNeighCellList-r13     OPTIONAL    --Need
OP
}

RedistributionNeighCellList-r13 ::= SEQUENCE (SIZE (1..maxCellInter)) OF RedistributionNeighCell-r13

RedistributionNeighCell-r13 ::=     SEQUENCE {
    physCellId-r13                              PhysCellId,
    redistributionFactorCell-r13                RedistributionFactor-r13
}

RedistributionFactor-r13 ::=    INTEGER(1..10)

-- ASN1STOP
```


DAINGEAN_0002083

***SystemInformationBlockType5* field descriptions**
freqBandInfo A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] for the frequency band represented by *dl-CarrierFreq* for which cell reselection parameters are common.
interFreqBlackCellList List of blacklisted inter-frequency neighbouring cells.
interFreqCarrierFreqList List of neighbouring inter-frequencies. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the E-ARFCN used to indicate this. If E-UTRAN includes *interFreqCarrierFreqList-v8h0*, *interFreqCarrierFreqList-v9e0*, *InterFreqCarrierFreqList-v1250* and/or *InterFreqCarrierFreqList-v1310*, it includes the same number of entries, and listed in the same order, as in *interFreqCarrierFreqList* (i.e. without suffix). See Annex D for more descriptions.
interFreqCarrierFreqListExt List of additional neighbouring inter-frequencies, i.e. extending the size of the inter-frequency carrier list using the general principles specified in 5.1.2. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the E-ARFCN used to indicate this. EUTRAN may include *interFreqCarrierFreqListExt* even if *interFreqCarrierFreqList* (i.e without suffix) does not include *maxFreq* entries. If E-UTRAN includes *InterFreqCarrierFreqListExt-v1310* it includes the same number of entries, and listed in the same order, as in *interFreqCarrierFreqListExt-r12*.
interFreqNeighCellList List of inter-frequency neighbouring cells with specific cell re-selection parameters.
multiBandInfoList Indicates the list of frequency bands in addition to the band represented by *dl-CarrierFreq* for which cell reselection parameters are common. E-UTRAN indicates at most *maxMultiBands* frequency bands (i.e. the total number of entries across both *multiBandInfoList* and *multiBandInfoList-v9e0* is below this limit).
multiBandInfoList-v10j0 A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] for the frequency bands in *multiBandInfoList* (i.e. without suffix) and *multiBandInfoList-v9e0*. If E-UTRAN includes *multiBandInfoList-v10j0*, it includes the same number of entries, and listed in the same order, as in *multiBandInfoList* (i.e. without suffix).
p-Max Value applicable for the neighbouring E-UTRA cells on this carrier frequency. If absent the UE applies the maximum power according to the UE capability.
q-OffsetCell Parameter "$Qoffset_{s,n}$" in TS 36.304 [4].
q-OffsetFreq Parameter "$Qoffset_{frequency}$" in TS 36.304 [4].
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4]. If the field is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$. NOTE 1.
q-QualMinRSRQ-OnAllSymbols If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, perform RSRQ measurement on all OFDM symbols in accordance with TS 36.214 [48]. NOTE 1.
q-QualMinWB If this field is present and supported by the UE, the UE shall, when performing RSRQ measurements, use a wider bandwidth in accordance with TS 36.133 [16]. NOTE 1.
redistributionFactorFreq Parameter *redistributionFactorFreq* in TS 36.304 [4].
redistributionFactorCell Parameter *redistributionFactorCell* in TS 36.304 [4].
reducedMeasPerformance Value *TRUE* indicates that the neighbouring inter-frequency is configured for reduced measurement performance, see TS 36.133 [16]. If the field is not included, the neighbouring inter-frequency is configured for normal measurement performance, see TS 36.133 [16].
threshX-High Parameter "$Thresh_{X, HighP}$" in TS 36.304 [4].
threshX-HighQ Parameter "$Thresh_{X, HighQ}$" in TS 36.304 [4].
threshX-Low Parameter "$Thresh_{X, LowP}$" in TS 36.304 [4].
threshX-LowQ Parameter "$Thresh_{X, LowQ}$" in TS 36.304 [4].
t-ReselectionEUTRA Parameter "$Treselection_{EUTRA}$" in TS 36.304 [4].
t-ReselectionEUTRA-SF Parameter "Speed dependent ScalingFactor for $Treselection_{EUTRA}$" in TS 36.304 [4]. If the field is not present, the UE behaviour is specified in TS 36.304 [4].

DAINGEAN_0002084

NOTE 1: The value the UE applies for parameter "$Q_{qualmin}$" in TS 36.304 [4] depends on the *q-QualMin* fields signalled by E-UTRAN and supported by the UE. In case multiple candidate options are available, the UE shall select the highest priority candidate option according to the priority order indicated by the following table (top row is highest priority).

q-QualMinRSRQ-OnAllSymbols	q-QualMinWB	Value of parameter "$Q_{qualmin}$" in TS 36.304 [4]
Included	Included	*q-QualMinRSRQ-OnAllSymbols* – (*q-QualMin* – *q-QualMinWB*)
Included	Not included	*q-QualMinRSRQ-OnAllSymbols*
Not included	Included	*q-QualMinWB*
Not included	Not included	*q-QualMin*

Conditional presence	Explanation
dl-FreqMax	The field is mandatory present if, for the corresponding entry in *InterFreqCarrierFreqList* (i.e. without suffix), *dl-CarrierFreq* (i.e. without suffix) is set to *maxEARFCN*. Otherwise the field is not present.
RSRQ	The field is mandatory present if *threshServingLowQ* is present in *systemInformationBlockType3*; otherwise it is not present.
RSRQ2	The field is mandatory present for all EUTRA carriers listed in SIB5 if *q-QualMinRSRQ-OnAllSymbols* is present in SIB3; otherwise it is not present and the UE shall delete any existing value for this field.
WB-RSRQ	The field is optionally present, need OP if the measurement bandwidth indicated by *allowedMeasBandwidth* is 50 resource blocks or larger; otherwise it is not present.

– *SystemInformationBlockType6*

The IE *SystemInformationBlockType6* contains information relevant only for inter-RAT cell re-selection i.e. information about UTRA frequencies and UTRA neighbouring cells relevant for cell re-selection. The IE includes cell re-selection parameters common for a frequency.

SystemInformationBlockType6 information element

```
-- ASN1START

SystemInformationBlockType6 ::=     SEQUENCE {
    carrierFreqListUTRA-FDD             CarrierFreqListUTRA-FDD         OPTIONAL,       -- Need OR
    carrierFreqListUTRA-TDD             CarrierFreqListUTRA-TDD         OPTIONAL,       -- Need OR
    t-ReselectionUTRA                   T-Reselection,
    t-ReselectionUTRA-SF                SpeedStateScaleFactors          OPTIONAL,       -- Need OP
    ...,
    lateNonCriticalExtension            OCTET STRING    (CONTAINING SystemInformationBlockType6-
v8h0-IEs)                   OPTIONAL,
    [[  carrierFreqListUTRA-FDD-v1250 SEQUENCE (SIZE (1..maxUTRA-FDD-Carrier)) OF
                                        CarrierFreqInfoUTRA-v1250       OPTIONAL,   -- Cond UTRA-FDD
        carrierFreqListUTRA-TDD-v1250 SEQUENCE (SIZE (1..maxUTRA-TDD-Carrier)) OF
                                        CarrierFreqInfoUTRA-v1250       OPTIONAL,   -- Cond UTRA-TDD
        carrierFreqListUTRA-FDD-Ext-r12 CarrierFreqListUTRA-FDD-Ext-r12 OPTIONAL,   -- Cond UTRA-FDD
        carrierFreqListUTRA-TDD-Ext-r12     CarrierFreqListUTRA-TDD-Ext-r12 OPTIONAL        -- Cond
UTRA-TDD
    ]]
}

SystemInformationBlockType6-v8h0-IEs ::=    SEQUENCE {
    carrierFreqListUTRA-FDD-v8h0 SEQUENCE (SIZE (1..maxUTRA-FDD-Carrier)) OF CarrierFreqInfoUTRA-
FDD-v8h0 OPTIONAL,  -- Cond UTRA-FDD
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

CarrierFreqInfoUTRA-v1250 ::=       SEQUENCE {
    reducedMeasPerformance-r12      ENUMERATED {true}       OPTIONAL        -- Need OP
}

CarrierFreqListUTRA-FDD ::=     SEQUENCE (SIZE (1..maxUTRA-FDD-Carrier)) OF CarrierFreqUTRA-FDD

CarrierFreqUTRA-FDD ::=             SEQUENCE {
    carrierFreq                         ARFCN-ValueUTRA,
    cellReselectionPriority             CellReselectionPriority         OPTIONAL,       -- Need OP
```


DAINGEAN_0002085

```
    threshX-High                        ReselectionThreshold,
    threshX-Low                         ReselectionThreshold,
    q-RxLevMin                          INTEGER (-60..-13),
    p-MaxUTRA                           INTEGER (-50..33),
    q-QualMin                           INTEGER (-24..0),
    ...,
    [[  threshX-Q-r9                    SEQUENCE {
            threshX-HighQ-r9                ReselectionThresholdQ-r9,
            threshX-LowQ-r9                 ReselectionThresholdQ-r9
        }                                                           OPTIONAL        -- Cond RSRQ
    ]]
}

CarrierFreqInfoUTRA-FDD-v8h0 ::=            SEQUENCE {
    multiBandInfoList                   SEQUENCE (SIZE (1..maxMultiBands)) OF FreqBandIndicator-
UTRA-FDD                OPTIONAL    -- Need OR
}

CarrierFreqListUTRA-FDD-Ext-r12 ::= SEQUENCE (SIZE (1..maxUTRA-FDD-Carrier)) OF
                                    CarrierFreqUTRA-FDD-Ext-r12

CarrierFreqUTRA-FDD-Ext-r12 ::=             SEQUENCE {
    carrierFreq-r12                     ARFCN-ValueUTRA,
    cellReselectionPriority-r12         CellReselectionPriority         OPTIONAL,   -- Need OP
    threshX-High-r12                    ReselectionThreshold,
    threshX-Low-r12                     ReselectionThreshold,
    q-RxLevMin-r12                      INTEGER (-60..-13),
    p-MaxUTRA-r12                       INTEGER (-50..33),
    q-QualMin-r12                       INTEGER (-24..0),
    threshX-Q-r12                       SEQUENCE {
            threshX-HighQ-r12               ReselectionThresholdQ-r9,
            threshX-LowQ-r12                ReselectionThresholdQ-r9
    }                                                       OPTIONAL,       -- Cond RSRQ
    multiBandInfoList-r12               SEQUENCE (SIZE (1..maxMultiBands)) OF FreqBandIndicator-
UTRA-FDD                OPTIONAL,   -- Need OR
    reducedMeasPerformance-r12          ENUMERATED {true}               OPTIONAL,   -- Need OP
    ...
}

CarrierFreqListUTRA-TDD ::=     SEQUENCE (SIZE (1..maxUTRA-TDD-Carrier)) OF CarrierFreqUTRA-TDD

CarrierFreqUTRA-TDD ::=             SEQUENCE {
    carrierFreq                         ARFCN-ValueUTRA,
    cellReselectionPriority             CellReselectionPriority         OPTIONAL,       -- Need OP
    threshX-High                        ReselectionThreshold,
    threshX-Low                         ReselectionThreshold,
    q-RxLevMin                          INTEGER (-60..-13),
    p-MaxUTRA                           INTEGER (-50..33),
    ...
}

CarrierFreqListUTRA-TDD-Ext-r12 ::= SEQUENCE (SIZE (1..maxUTRA-TDD-Carrier)) OF
                                    CarrierFreqUTRA-TDD-r12

CarrierFreqUTRA-TDD-r12 ::= SEQUENCE {
    carrierFreq-r12                     ARFCN-ValueUTRA,
    cellReselectionPriority-r12         CellReselectionPriority         OPTIONAL,       -- Need OP
    threshX-High-r12                    ReselectionThreshold,
    threshX-Low-r12                     ReselectionThreshold,
    q-RxLevMin-r12                      INTEGER (-60..-13),
    p-MaxUTRA-r12                       INTEGER (-50..33),
    reducedMeasPerformance-r12          ENUMERATED {true}               OPTIONAL,   -- Need OP
    ...
}

FreqBandIndicator-UTRA-FDD ::=              INTEGER (1..86)

-- ASN1STOP
```


DAINGEAN_0002086

***SystemInformationBlockType6* field descriptions**
carrierFreqListUTRA-FDD List of carrier frequencies of UTRA FDD. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the ARFCN used to indicate this. If E-UTRAN includes *carrierFreqListUTRA-FDD-v8h0* and/or *carrierFreqListUTRA-FDD-v1250*, it includes the same number of entries, and listed in the same order, as in *carrierFreqListUTRA-FDD* (i.e. without suffix). See Annex D for more descriptions.
carrierFreqListUTRA-FDD-Ext List of additional carrier frequencies of UTRA FDD. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the ARFCN used to indicate this. EUTRAN may include *carrierFreqListUTRA-FDD-Ext* even if *carrierFreqListUTRA-FDD* (i.e without suffix) does not include *maxUTRA-FDD-Carrier* entries.
carrierFreqListUTRA-TDD List of carrier frequencies of UTRA TDD. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the ARFCN used to indicate this If E-UTRAN includes *carrierFreqListUTRA-TDD-v1250*, it includes the same number of entries, and listed in the same order, as in *carrierFreqListUTRA-TDD* (i.e. without suffix).
carrierFreqListUTRA-TDD-Ext List of additional carrier frequencies of UTRA TDD. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the ARFCN used to indicate this. EUTRAN may include *carrierFreqListUTRA-TDD-Ext* even if *carrierFreqListUTRA-TDD* (i.e without suffix) does not include *maxUTRA-TDD-Carrier* entries.
multiBandInfoList Indicates the list of frequency bands in addition to the band represented by *carrierFreq* in the *CarrierFreqUTRA-FDD* for which UTRA cell reselection parameters are common.
p-MaxUTRA The maximum allowed transmission power on the (uplink) carrier frequency, see TS 25.304 [40]. In dBm
q-QualMin Parameter "$Q_{qualmin}$" in TS 25.304 [40]. Actual value = field value [dB].
q-RxLevMin Parameter "$Q_{rxlevmin}$" in TS 25.304 [40]. Actual value = field value * 2+1 [dBm].
reducedMeasPerformance Value *TRUE* indicates that the UTRA carrier frequency is configured for reduced measurement performance, see TS 36.133 [16]. If the field is not included, the UTRA carrier frequency is configured for normal measurement performance, see TS 36.133 [16].
t-ReselectionUTRA Parameter "$Treselection_{UTRAN}$" in TS 36.304 [4].
t-ReselectionUTRA-SF Parameter "Speed dependent ScalingFactor for $Treselection_{UTRA}$" in TS 36.304 [4]. If the field is not present, the UE behaviour is specified in TS 36.304 [4].
threshX-High Parameter "$Thresh_{X, HighP}$" in TS 36.304 [4].
threshX-HighQ Parameter "$Thresh_{X, HighQ}$" in TS 36.304 [4].
threshX-Low Parameter "$Thresh_{X, LowP}$" in TS 36.304 [4].
threshX-LowQ Parameter "$Thresh_{X, LowQ}$" in TS 36.304 [4].

Conditional presence	Explanation
RSRQ	The field is mandatory present if the *threshServingLowQ* is present in *systemInformationBlockType3*; otherwise it is not present.
UTRA-FDD	The field is optionally present, need OR, if the *carrierFreqListUTRA-FDD* is present. Otherwise it is not present.
UTRA-TDD	The field is optionally present, need OR, if the *carrierFreqListUTRA-TDD* is present. Otherwise it is not present.

– *SystemInformationBlockType7*

The IE *SystemInformationBlockType7* contains information relevant only for inter-RAT cell re-selection i.e. information about GERAN frequencies relevant for cell re-selection. The IE includes cell re-selection parameters for each frequency.

***SystemInformationBlockType7* information element**

```
-- ASN1START

SystemInformationBlockType7 ::=     SEQUENCE {
    t-ReselectionGERAN                  T-Reselection,
```


DAINGEAN_0002087

```
    t-ReselectionGERAN-SF               SpeedStateScaleFactors              OPTIONAL,   -- Need OR
    carrierFreqsInfoList                CarrierFreqsInfoListGERAN           OPTIONAL,   -- Need OR
    ...,
    lateNonCriticalExtension                OCTET STRING                OPTIONAL
}

CarrierFreqsInfoListGERAN ::=           SEQUENCE (SIZE (1..maxGNFG)) OF CarrierFreqsInfoGERAN

CarrierFreqsInfoGERAN ::=           SEQUENCE {
    carrierFreqs                        CarrierFreqsGERAN,
    commonInfo                          SEQUENCE {
        cellReselectionPriority             CellReselectionPriority         OPTIONAL,   -- Need OP
        ncc-Permitted                       BIT STRING (SIZE (8)),
        q-RxLevMin                          INTEGER (0..45),
        p-MaxGERAN                          INTEGER (0..39)                 OPTIONAL,   -- Need OP
        threshX-High                        ReselectionThreshold,
        threshX-Low                         ReselectionThreshold
    },
    ...
}

-- ASN1STOP
```

***SystemInformationBlockType7* field descriptions**
carrierFreqs
The list of GERAN carrier frequencies organised into one group of GERAN carrier frequencies.
carrierFreqsInfoList
Provides a list of neighbouring GERAN carrier frequencies, which may be monitored for neighbouring GERAN cells. The GERAN carrier frequencies are organised in groups and the cell reselection parameters are provided per group of GERAN carrier frequencies.
commonInfo
Defines the set of cell reselection parameters for the group of GERAN carrier frequencies.
ncc-Permitted
Field encoded as a bit map, where bit N is set to "0" if a BCCH carrier with NCC = N-1 is not permitted for monitoring and set to "1" if the BCCH carrier with NCC = N-1 is permitted for monitoring; N = 1 to 8; bit 1 of the bitmap is the leading bit of the bit string.
p-MaxGERAN
Maximum allowed transmission power for GERAN on an uplink carrier frequency, see TS 45.008 [28]. Value in dBm. Applicable for the neighbouring GERAN cells on this carrier frequency. If *pmaxGERAN* is absent, the maximum power according to the UE capability is used.
q-RxLevMin
Parameter "$Q_{rxlevmin}$" in TS 36.304 [4], minimum required RX level in the GSM cell. The actual value of $Q_{rxlevmin}$ in dBm = (field value * 2) – 115.
threshX-High
Parameter "$Thresh_{X, HighP}$" in TS 36.304 [4].
threshX-Low
Parameter "$Thresh_{X, LowP}$" in TS 36.304 [4].
t-ReselectionGERAN
Parameter "$Treselection_{GERAN}$" in TS 36.304 [4].
t-ReselectionGERAN-SF
Parameter "Speed dependent ScalingFactor for $Treselection_{GERAN}$" in TS 36.304 [4]. If the field is not present, the UE behaviour is specified in TS 36.304 [4].

– *SystemInformationBlockType8*

The IE *SystemInformationBlockType8* contains information relevant only for inter-RAT cell re-selection i.e. information about CDMA2000 frequencies and CDMA2000 neighbouring cells relevant for cell re-selection. The IE includes cell re-selection parameters common for a frequency as well as cell specific re-selection parameters.

***SystemInformationBlockType8* information element**

```
-- ASN1START

SystemInformationBlockType8 ::=     SEQUENCE {
    systemTimeInfo                      SystemTimeInfoCDMA2000              OPTIONAL,   -- Need OR
    searchWindowSize                    INTEGER (0..15)                     OPTIONAL,   -- Need OR
    parametersHRPD                      SEQUENCE {
        preRegistrationInfoHRPD             PreRegistrationInfoHRPD,
```


DAINGEAN_0002088

```
        cellReselectionParametersHRPD       CellReselectionParametersCDMA2000   OPTIONAL -- Need OR
    }                                                                           OPTIONAL,   -- Need OR
    parameters1XRTT                     SEQUENCE {
        csfb-RegistrationParam1XRTT         CSFB-RegistrationParam1XRTT     OPTIONAL,   -- Need OP
        longCodeState1XRTT                  BIT STRING (SIZE (42))          OPTIONAL,   -- Need OR
        cellReselectionParameters1XRTT      CellReselectionParametersCDMA2000   OPTIONAL -- Need OR
    }                                                                           OPTIONAL,   -- Need OR
    ...,
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    [[  csfb-SupportForDualRxUEs-r9         BOOLEAN                         OPTIONAL,   -- Need OR
        cellReselectionParametersHRPD-v920  CellReselectionParametersCDMA2000-v920  OPTIONAL,   --
Cond NCL-HRPD
        cellReselectionParameters1XRTT-v920 CellReselectionParametersCDMA2000-v920  OPTIONAL,   --
Cond NCL-1XRTT
        csfb-RegistrationParam1XRTT-v920    CSFB-RegistrationParam1XRTT-v920        OPTIONAL,   --
Cond REG-1XRTT
        ac-BarringConfig1XRTT-r9            AC-BarringConfig1XRTT-r9    OPTIONAL    -- Cond REG-
1XRTT
    ]],
    [[  csfb-DualRxTxSupport-r10            ENUMERATED {true}           OPTIONAL    -- Cond REG-
1XRTT
    ]],
    [[  sib8-PerPLMN-List-r11               SIB8-PerPLMN-List-r11       OPTIONAL    -- Need OR
    ]]
}

CellReselectionParametersCDMA2000 ::= SEQUENCE {
    bandClassList                       BandClassListCDMA2000,
    neighCellList                       NeighCellListCDMA2000,
    t-ReselectionCDMA2000           T-Reselection,
    t-ReselectionCDMA2000-SF            SpeedStateScaleFactors              OPTIONAL    -- Need OP
}

CellReselectionParametersCDMA2000-r11 ::= SEQUENCE {
    bandClassList                       BandClassListCDMA2000,
    neighCellList-r11                   SEQUENCE (SIZE (1..16)) OF NeighCellCDMA2000-r11,
    t-ReselectionCDMA2000               T-Reselection,
    t-ReselectionCDMA2000-SF            SpeedStateScaleFactors              OPTIONAL    -- Need OP
}

CellReselectionParametersCDMA2000-v920 ::= SEQUENCE {
    neighCellList-v920                      NeighCellListCDMA2000-v920
}

NeighCellListCDMA2000 ::=           SEQUENCE (SIZE (1..16)) OF NeighCellCDMA2000

NeighCellCDMA2000 ::=   SEQUENCE {
    bandClass                           BandclassCDMA2000,
    neighCellsPerFreqList               NeighCellsPerBandclassListCDMA2000
}

NeighCellCDMA2000-r11 ::=   SEQUENCE {
    bandClass                           BandclassCDMA2000,
    neighFreqInfoList-r11               SEQUENCE (SIZE (1..16)) OF NeighCellsPerBandclassCDMA2000-
r11
}

NeighCellsPerBandclassListCDMA2000 ::= SEQUENCE (SIZE (1..16)) OF NeighCellsPerBandclassCDMA2000

NeighCellsPerBandclassCDMA2000 ::=  SEQUENCE {
    arfcn                               ARFCN-ValueCDMA2000,
    physCellIdList                      PhysCellIdListCDMA2000
}

NeighCellsPerBandclassCDMA2000-r11 ::=  SEQUENCE {
    arfcn                               ARFCN-ValueCDMA2000,
    physCellIdList-r11                  SEQUENCE (SIZE (1..40)) OF PhysCellIdCDMA2000
}

NeighCellListCDMA2000-v920 ::=      SEQUENCE (SIZE (1..16)) OF NeighCellCDMA2000-v920

NeighCellCDMA2000-v920 ::=          SEQUENCE {
    neighCellsPerFreqList-v920          NeighCellsPerBandclassListCDMA2000-v920
}

NeighCellsPerBandclassListCDMA2000-v920 ::= SEQUENCE (SIZE (1..16)) OF
NeighCellsPerBandclassCDMA2000-v920
```


DAINGEAN_0002089

```
NeighCellsPerBandclassCDMA2000-v920 ::= SEQUENCE {
    physCellIdList-v920                 PhysCellIdListCDMA2000-v920
}

PhysCellIdListCDMA2000 ::=          SEQUENCE (SIZE (1..16)) OF PhysCellIdCDMA2000

PhysCellIdListCDMA2000-v920 ::=     SEQUENCE (SIZE (0..24)) OF PhysCellIdCDMA2000

BandClassListCDMA2000 ::=           SEQUENCE (SIZE (1..maxCDMA-BandClass)) OF BandClassInfoCDMA2000

BandClassInfoCDMA2000 ::=   SEQUENCE {
    bandClass                           BandclassCDMA2000,
    cellReselectionPriority             CellReselectionPriority             OPTIONAL,   -- Need OP
    threshX-High                        INTEGER (0..63),
    threshX-Low                         INTEGER (0..63),
    ...
}

AC-BarringConfig1XRTT-r9 ::=        SEQUENCE {
    ac-Barring0to9-r9                   INTEGER (0..63),
    ac-Barring10-r9                     INTEGER (0..7),
    ac-Barring11-r9                     INTEGER (0..7),
    ac-Barring12-r9                     INTEGER (0..7),
    ac-Barring13-r9                     INTEGER (0..7),
    ac-Barring14-r9                     INTEGER (0..7),
    ac-Barring15-r9                     INTEGER (0..7),
    ac-BarringMsg-r9                    INTEGER (0..7),
    ac-BarringReg-r9                    INTEGER (0..7),
    ac-BarringEmg-r9                    INTEGER (0..7)
}

SIB8-PerPLMN-List-r11 ::=           SEQUENCE (SIZE (1..maxPLMN-r11)) OF SIB8-PerPLMN-r11

SIB8-PerPLMN-r11 ::=                SEQUENCE {
    plmn-Identity-r11                   INTEGER (1..maxPLMN-r11),
    parametersCDMA2000-r11              CHOICE {
        explicitValue                       ParametersCDMA2000-r11,
        defaultValue                        NULL
    }
}

ParametersCDMA2000-r11 ::=          SEQUENCE {
    systemTimeInfo-r11                  CHOICE  {
        explicitValue                       SystemTimeInfoCDMA2000,
        defaultValue                        NULL
    }                                                       OPTIONAL,   -- Need OR
    searchWindowSize-r11                INTEGER (0..15),
    parametersHRPD-r11                  SEQUENCE {
        preRegistrationInfoHRPD-r11         PreRegistrationInfoHRPD,
        cellReselectionParametersHRPD-r11   CellReselectionParametersCDMA2000-r11   OPTIONAL -- Need
OR
    }       OPTIONAL,   -- Need OR
    parameters1XRTT-r11                 SEQUENCE {
        csfb-RegistrationParam1XRTT-r11     CSFB-RegistrationParam1XRTT         OPTIONAL, -- Need OP
        csfb-RegistrationParam1XRTT-Ext-r11 CSFB-RegistrationParam1XRTT-v920    OPTIONAL, -- Cond
REG-1XRTT-PerPLMN
        longCodeState1XRTT-r11              BIT STRING (SIZE (42))  OPTIONAL, -- Cond PerPLMN-LC
        cellReselectionParameters1XRTT-r11  CellReselectionParametersCDMA2000-r11   OPTIONAL, --
Need OR
        ac-BarringConfig1XRTT-r11           AC-BarringConfig1XRTT-r9            OPTIONAL, -- Cond
REG-1XRTT-PerPLMN
        csfb-SupportForDualRxUEs-r11        BOOLEAN                             OPTIONAL, -- Need OR
        csfb-DualRxTxSupport-r11            ENUMERATED {true}           OPTIONAL -- Cond REG-1XRTT-
PerPLMN
    }       OPTIONAL,   -- Need OR
    ...
}

-- ASN1STOP
```


DAINGEAN_0002090

SystemInformationBlockType8 field descriptions

ac-BarringConfig1XRTT
Contains the access class barring parameters the UE uses to calculate the access class barring factor, see C.S0097 [53].

ac-Barring0to9
Parameter used for calculating the access class barring factor for access overload classes 0 through 9. It is the parameter "PSIST" in C.S0004 [34] for access overload classes 0 through 9.

ac-BarringEmg
Parameter used for calculating the access class barring factor for emergency calls and emergency message transmissions for access overload classes 0 through 9. It is the parameter "PSIST_EMG" in C.S0004 [34].

ac-BarringMsg
Parameter used for modifying the access class barring factor for message transmissions. It is the parameter "MSG_PSIST" in C.S0004 [34].

ac-BarringN
Parameter used for calculating the access class barring factor for access overload class N (N = 10 to 15). It is the parameter "PSIST" in C.S0004 [34] for access overload class N.

ac-BarringReg
Parameter used for modifying the access class barring factor for autonomous registrations. It is the parameter "REG_PSIST" in C.S0004 [34].

bandClass
Identifies the Frequency Band in which the Carrier can be found. Details can be found in C.S0057 [24, Table 1.5].

bandClassList
List of CDMA2000 frequency bands.

cellReselectionParameters1XRTT
Cell reselection parameters applicable only to CDMA2000 1xRTT system.

cellReselectionParameters1XRTT-Ext
Cell reselection parameters applicable for cell reselection to CDMA2000 1XRTT system.

cellReselectionParameters1XRTT-v920
Cell reselection parameters applicable for cell reselection to CDMA2000 1XRTT system. The field is not present if *cellReselectionParameters1XRTT* is not present; otherwise it is optionally present.

cellReselectionParametersHRPD
Cell reselection parameters applicable for cell reselection to CDMA2000 HRPD system

cellReselectionParametersHRPD-Ext
Cell reselection parameters applicable for cell reselection to CDMA2000 HRPD system.

cellReselectionParametersHRPD-v920
Cell reselection parameters applicable for cell reselection to CDMA2000 HRPD system. The field is not present if *cellReselectionParametersHRPD* is not present; otherwise it is optionally present.

csfb-DualRxTxSupport
Value TRUE indicates that the network supports dual Rx/Tx enhanced 1xCSFB, which enables UEs capable of dual Rx/Tx enhanced 1xCSFB to switch off their 1xRTT receiver/transmitter while camped in E-UTRAN [51].

csfb-RegistrationParam1XRTT
Contains the parameters the UE will use to determine if it should perform a CDMA2000 1xRTT Registration/Re-Registration. This field is included if either CSFB or enhanced CS fallback to CDMA2000 1xRTT is supported.

csfb-SupportForDualRxUEs
Value TRUE indicates that the network supports dual Rx CSFB [51].

longCodeState1XRTT
The state of long code generation registers in CDMA2000 1XRTT system as defined in C.S0002 [12, Section 1.3] at $\lceil t/10 \rceil \times 10 + 320$ ms, where *t* equals to the *cdma-SystemTime*. This field is required for reporting CGI for 1xRTT, SRVCC handover and enhanced CS fallback to CDMA2000 1xRTT operation. Otherwise this IE is not needed. This field is excluded when estimating changes in system information, i.e. changes of *longCodeState1XRTT* should neither result in system information change notifications nor in a modification of *systemInfoValueTag* in SIB1.

neighCellList
List of CDMA2000 neighbouring cells. The total number of neighbouring cells in neighCellList for each RAT (1XRTT or HRPD) is limited to 32.

neighCellList-v920
Extended List of CDMA2000 neighbouring cells. The combined total number of CDMA2000 neighbouring cells in both *neighCellList* and *neighCellList-v920* is limited to 32 for HRPD and 40 for 1xRTT.

DAINGEAN_0002091

SystemInformationBlockType8 field descriptions

neighCellsPerFreqList

List of carrier frequencies and neighbour cell ids in each frequency within a CDMA2000 Band, see C.S0002 [12] or C.S0024 [26].

neighCellsPerFreqList-v920

Extended list of neighbour cell ids, in the same CDMA2000 Frequency Band as the corresponding instance in "NeighCellListCDMA2000".

parameters1XRTT

Parameters applicable for interworking with CDMA2000 1XRTT system.

parametersCDMA2000

Provides the corresponding SIB8 parameters for the CDMA2000 network associated with the PLMN indicated in *plmn-Identity*. A choice is used to indicate whether for this PLMN the parameters are signalled explicitly or set to the (default) values common for all PLMNs i.e. the values not included in *sib8-PerPLMN-List*.

parametersHRPD

Parameters applicable only for interworking with CDMA2000 HRPD systems.

physCellIdList

Identifies the list of CDMA2000 cell ids, see C.S0002 [12] or C.S0024 [26].

physCellIdList-v920

Extended list of CDMA2000 cell ids, in the same CDMA2000 ARFCN as the corresponding instance in "NeighCellsPerBandclassCDMA2000".

plmn-Identity

Indicates the PLMN associated with this CDMA2000 network. Value 1 indicates the PLMN listed 1st in *plmn-IdentityList* included in SIB1, value 2 indicates the PLMN listed 2nd in *plmn-IdentityList* included in SIB1 and so on. A PLMN which identity is not indicated in the *sib8-PerPLMN-List*, does not support inter-working with CDMA2000.

preRegistrationInfoHRPD

The CDMA2000 HRPD Pre-Registration Information tells the UE if it should pre-register with the CDMA2000 HRPD network and identifies the Pre-registration zone to the UE.

searchWindowSize

The search window size is a CDMA2000 parameter to be used to assist in searching for the neighbouring pilots. For values see C.S0005 [25, Table 2.6.6.2.1-1] and C.S0024 [26, Table 8.7.6.2-4]. This field is required for a UE with *rx-ConfigHRPD= single* and/ or *rx-Config1XRTT= single* to perform handover, cell re-selection, UE measurement based redirection and enhanced 1xRTT CS fallback from E-UTRAN to CDMA2000 according to this specification and TS 36.304 [4].

sib8-PerPLMN-List

This field provides the values for the interworking CDMA2000 networks corresponding, if any, to the UE's RPLMN.

systemTimeInfo

Information on CDMA2000 system time. This field is required for a UE with *rx-ConfigHRPD= single* and/ or *rx-Config1XRTT= single* to perform handover, cell re-selection, UE measurement based redirection and enhanced 1xRTT CS fallback from E-UTRAN to CDMA2000 according to this specification and TS 36.304 [4]. This field is excluded when estimating changes in system information, i.e. changes of *systemTimeInfo* should neither result in system information change notifications nor in a modification of *systemInfoValueTag* in SIB1.
For the field included in *ParametersCDMA2000*, a choice is used to indicate whether for this PLMN the parameters are signalled explicitly or set to the (default) value common for all PLMNs i.e. the value not included in *sib8-PerPLMN-List*.

threshX-High

Parameter "$Thresh_{X, HighP}$" in TS 36.304 [4]. This specifies the high threshold used in reselection towards this CDMA2000 band class expressed as an unsigned binary number equal to FLOOR ($-2 \times 10 \times \log_{10} E_c/I_o$) in units of 0.5 dB, as defined in C.S0005 [25].

threshX-Low

Parameter "$Thresh_{X, LowP}$" in TS 36.304 [4]. This specifies the low threshold used in reselection towards this CDMA2000 band class expressed as an unsigned binary number equal to FLOOR ($-2 \times 10 \times \log_{10} E_c/I_o$) in units of 0.5 dB, as defined in C.S0005 [25].

t-ReselectionCDMA2000

Parameter "$Treselection_{CDMA\_HRPD}$" or "$Treselection_{CDMA\_1xRTT}$" in TS 36.304 [4].

t-ReselectionCDMA2000-SF

Parameter "Speed dependent ScalingFactor for $Treselection_{CDMA-HRPD}$" or "$Treselection_{CDMA-1xRTT}$" in TS 36.304 [4]. If the field is not present, the UE behaviour is specified in TS 36.304 [4].

DAINGEAN_0002092

Conditional presence	Explanation
NCL-1XRTT	The field is optional present, need OR, if *cellReselectionParameters1xRTT* is present; otherwise it is not present.
NCL-HRPD	The field is optional present, need OR, if *cellReselectionParametersHRPD* is present; otherwise it is not present.
PerPLMN-LC	The field is optional present, need OR, when *systemTimeInfo* is included in *SIB8PerPLMN* for this CDMA2000 network; otherwise it is not present.
REG-1XRTT	The field is optional present, need OR, if *csfb-RegistrationParam1XRTT* is present; otherwise it is not present.
REG-1XRTT-PerPLMN	The field is optional present, need OR, if *csfb-RegistrationParam1XRTT* is included in *SIB8PerPLMN* for this CDMA2000 network; otherwise it is not present.

– *SystemInformationBlockType9*

The IE *SystemInformationBlockType9* contains a home eNB name (HNB Name).

SystemInformationBlockType9 information element

```
-- ASN1START

SystemInformationBlockType9 ::=     SEQUENCE {
    hnb-Name                            OCTET STRING (SIZE(1..48))      OPTIONAL,   -- Need OR
    ...,
    lateNonCriticalExtension                OCTET STRING                OPTIONAL
}

-- ASN1STOP
```

SystemInformationBlockType9 field descriptions
hnb-Name
Carries the name of the home eNB, coded in UTF-8 with variable number of bytes per character, see TS 22.011 [10].

– *SystemInformationBlockType10*

The IE *SystemInformationBlockType10* contains an ETWS primary notification.

SystemInformationBlockType10 information element

```
-- ASN1START

SystemInformationBlockType10 ::=    SEQUENCE {
    messageIdentifier                   BIT STRING (SIZE (16)),
    serialNumber                        BIT STRING (SIZE (16)),
    warningType                         OCTET STRING (SIZE (2)),
    dummy                               OCTET STRING (SIZE (50))    OPTIONAL,       -- Need OP
    ...,
    lateNonCriticalExtension            OCTET STRING                OPTIONAL
}

-- ASN1STOP
```


DAINGEAN_0002093

***SystemInformationBlockType10* field descriptions**
messageIdentifier
Identifies the source and type of ETWS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.44]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.1], while the trailing bit contains bit 0 of the second octet of the same equivalent IE.
serialNumber
Identifies variations of an ETWS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.45]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.2], while the trailing bit contains bit 0 of the second octet of the same equivalent IE.
dummy
This field is not used in the specification. If received it shall be ignored by the UE.
warningType
Identifies the warning type of the ETWS primary notification and provides information on emergency user alert and UE popup. The first octet (which is equivalent to the first octet of the equivalent IE defined in TS 36.413 [39, 9.2.1.50]) contains the first octet of the equivalent IE defined in and encoded according to TS 23.041 [37, 9.3.24], and so on.

– *SystemInformationBlockType11*

The IE *SystemInformationBlockType11* contains an ETWS secondary notification.

***SystemInformationBlockType11* information element**

```
-- ASN1START

SystemInformationBlockType11 ::=    SEQUENCE {
    messageIdentifier                   BIT STRING (SIZE (16)),
    serialNumber                        BIT STRING (SIZE (16)),
    warningMessageSegmentType           ENUMERATED {notLastSegment, lastSegment},
    warningMessageSegmentNumber         INTEGER (0..63),
    warningMessageSegment               OCTET STRING,
    dataCodingScheme                    OCTET STRING (SIZE (1))         OPTIONAL,   -- Cond Segment1
    ...,
    lateNonCriticalExtension                OCTET STRING                OPTIONAL
}

-- ASN1STOP
```

***SystemInformationBlockType11* field descriptions**
dataCodingScheme
Identifies the alphabet/coding and the language applied variations of an ETWS notification. The octet (which is equivalent to the octet of the equivalent IE defined in TS 36.413 [39, 9.2.1.52]) contains the octet of the equivalent IE defined in TS 23.041 [37, 9.4.3.2.3] and encoded according to TS 23.038 [38].
messageIdentifier
Identifies the source and type of ETWS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.44]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.1], while the trailing bit contains bit 0 of second octet of the same equivalent IE.
serialNumber
Identifies variations of an ETWS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.45]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.2], while the trailing bit contains bit 0 of second octet of the same equivalent IE.
warningMessageSegment
Carries a segment of the *Warning Message Contents* IE defined in TS 36.413 [39, 9.2.1.53]. The first octet of the *Warning Message Contents* IE is equivalent to the first octet of the *CB data* IE defined in and encoded according to TS 23.041 [37, 9.4.2.2.5] and so on.
warningMessageSegmentNumber
Segment number of the ETWS warning message segment contained in the SIB. A segment number of zero corresponds to the first segment, one corresponds to the second segment, and so on.
warningMessageSegmentType
Indicates whether the included ETWS warning message segment is the last segment or not.

DAINGEAN_0002094

Conditional presence	Explanation
Segment1	The field is mandatory present in the first segment of SIB11, otherwise it is not present.

– *SystemInformationBlockType12*

The IE *SystemInformationBlockType12* contains a CMAS notification.

SystemInformationBlockType12 information element

```
-- ASN1START

SystemInformationBlockType12-r9 ::= SEQUENCE {
    messageIdentifier-r9                BIT STRING (SIZE (16)),
    serialNumber-r9                     BIT STRING (SIZE (16)),
    warningMessageSegmentType-r9        ENUMERATED {notLastSegment, lastSegment},
    warningMessageSegmentNumber-r9      INTEGER (0..63),
    warningMessageSegment-r9            OCTET STRING,
    dataCodingScheme-r9                 OCTET STRING (SIZE (1))         OPTIONAL,   -- Cond Segment1
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    ...
}

-- ASN1STOP
```

***SystemInformationBlockType12* field descriptions**
dataCodingScheme Identifies the alphabet/coding and the language applied variations of a CMAS notification. The octet (which is equivalent to the octet of the equivalent IE defined in TS 36.413 [39, 9.2.1.52]) contains the octet of the equivalent IE defined in TS 23.041 [37, 9.4.3.2.3] and encoded according to TS 23.038 [38].
messageIdentifier Identifies the source and type of CMAS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.44]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.1], while the trailing bit contains bit 0 of second octet of the same equivalent IE.
serialNumber Identifies variations of a CMAS notification. The leading bit (which is equivalent to the leading bit of the equivalent IE defined in TS 36.413 [39, 9.2.1.45]) contains bit 7 of the first octet of the equivalent IE, defined in and encoded according to TS 23.041 [37, 9.4.3.2.2], while the trailing bit contains bit 0 of second octet of the same equivalent IE.
warningMessageSegment Carries a segment of the *Warning Message Contents* IE defined in TS 36.413 [39]. The first octet of the *Warning Message Contents* IE is equivalent to the first octet of the *CB data* IE defined in and encoded according to TS 23.041 [37, 9.4.2.2.5] and so on.
warningMessageSegmentNumber Segment number of the CMAS warning message segment contained in the SIB. A segment number of zero corresponds to the first segment, one corresponds to the second segment, and so on.
warningMessageSegmentType Indicates whether the included CMAS warning message segment is the last segment or not.

Conditional presence	Explanation
Segment1	The field is mandatory present in the first segment of SIB12, otherwise it is not present.

– *SystemInformationBlockType13*

The IE *SystemInformationBlockType13* contains the information required to acquire the MBMS control information associated with one or more MBSFN areas.

SystemInformationBlockType13 information element

```
-- ASN1START

SystemInformationBlockType13-r9 ::= SEQUENCE {
    mbsfn-AreaInfoList-r9               MBSFN-AreaInfoList-r9,
```


DAINGEAN_0002095

```
    notificationConfig-r9                MBMS-NotificationConfig-r9,
    lateNonCriticalExtension             OCTET STRING                    OPTIONAL,
    ...
}

-- ASN1STOP
```

***SystemInformationBlockType13* field descriptions**
notificationConfig
Indicates the MBMS notification related configuration parameters. The UE shall ignore this field when *dl-Bandwidth* included in *MasterInformationBlock* is set to n6.

– *SystemInformationBlockType14*

The IE *SystemInformationBlockType14* contains the EAB parameters.

***SystemInformationBlockType14* information element**

```
-- ASN1START

SystemInformationBlockType14-r11 ::=    SEQUENCE {
    eab-Param-r11                           CHOICE {
        eab-Common-r11                          EAB-Config-r11,
        eab-PerPLMN-List-r11                    SEQUENCE (SIZE (1..maxPLMN-r11)) OF EAB-ConfigPLMN-
r11
    }                                                                   OPTIONAL, -- Need OR
    lateNonCriticalExtension                OCTET STRING                OPTIONAL,
    ...
}

EAB-ConfigPLMN-r11 ::=              SEQUENCE {
    eab-Config-r11                      EAB-Config-r11              OPTIONAL -- Need OR
}

EAB-Config-r11 ::=                  SEQUENCE {
    eab-Category-r11                    ENUMERATED {a, b, c},
    eab-BarringBitmap-r11               BIT STRING (SIZE (10))
}

-- ASN1STOP
```

***SystemInformationBlockType14* field descriptions**
eab-BarringBitmap
Extended access class barring for AC 0-9. The first/ leftmost bit is for AC 0, the second bit is for AC 1, and so on.
eab-Category
Indicates the category of UEs for which EAB applies. Value *a* corresponds to all UEs, value *b* corresponds to the UEs that are neither in their HPLMN nor in a PLMN that is equivalent to it, and value *c* corresponds to the UEs that are neither in the PLMN listed as most preferred PLMN of the country where the UEs are roaming in the operator-defined PLMN selector list on the USIM, nor in their HPLMN nor in a PLMN that is equivalent to their HPLMN, see TS 22.011 [10].
eab-Common
The EAB parameters applicable for all PLMN(s).
eab-PerPLMN-List
The EAB parameters per PLMN, listed in the same order as the PLMN(s) occur in *plmn-IdentityList* in *SystemInformationBlockType1*.

– *SystemInformationBlockType15*

The IE *SystemInformationBlockType15* contains the MBMS Service Area Identities (SAI) of the current and/ or neighbouring carrier frequencies.

***SystemInformationBlockType15* information element**

```
-- ASN1START

SystemInformationBlockType15-r11 ::=    SEQUENCE {
    mbms-SAI-IntraFreq-r11                  MBMS-SAI-List-r11               OPTIONAL,   -- Need OR
```


DAINGEAN_0002096

```
    mbms-SAI-InterFreqList-r11              MBMS-SAI-InterFreqList-r11      OPTIONAL,   -- Need OR
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    ...,
    [[  mbms-SAI-InterFreqList-v1140        MBMS-SAI-InterFreqList-v1140    OPTIONAL    -- Cond
InterFreq
    ]]
}

MBMS-SAI-List-r11 ::=                   SEQUENCE (SIZE (1..maxSAI-MBMS-r11)) OF MBMS-SAI-r11

MBMS-SAI-r11 ::=                        INTEGER (0..65535)

MBMS-SAI-InterFreqList-r11 ::=          SEQUENCE (SIZE (1..maxFreq)) OF MBMS-SAI-InterFreq-r11

MBMS-SAI-InterFreqList-v1140 ::=        SEQUENCE (SIZE (1..maxFreq)) OF MBMS-SAI-InterFreq-v1140

MBMS-SAI-InterFreq-r11 ::=              SEQUENCE {
    dl-CarrierFreq-r11                      ARFCN-ValueEUTRA-r9,
    mbms-SAI-List-r11                       MBMS-SAI-List-r11
}

MBMS-SAI-InterFreq-v1140 ::=            SEQUENCE {
       multiBandInfoList-r11                MultiBandInfoList-r11           OPTIONAL    -- Need OR
}


-- ASN1STOP
```

***SystemInformationBlockType15* field descriptions**
mbms-SAI-InterFreqList   Contains a list of neighboring frequencies including additional bands, if any, that provide MBMS services and the corresponding MBMS SAIs.
mbms-SAI-IntraFreq   Contains the list of MBMS SAIs for the current frequency. A duplicate MBMS SAI indicates that this and all following SAIs are not offered by this cell but only by neighbour cells on the current frequency. For MBMS service continuity, the UE shall use all MBMS SAIs listed in *mbms-SAI-IntraFreq* to derive the MBMS frequencies of interest.
mbms-SAI-List   Contains a list of MBMS SAIs for a specific frequency.
multiBandInfoList   A list of additional frequency bands applicable for the cells participating in the MBSFN transmission.

Conditional presence	Explanation
InterFreq	The field is optionally present, need OR, if the *mbms-SAI-InterFreqList-r11* is present. Otherwise it is not present.

– *SystemInformationBlockType16*

The IE *SystemInformationBlockType16* contains information related to GPS time and Coordinated Universal Time (UTC). The UE may use the parameters provided in this system information block to obtain the UTC, the GPS and the local time.

NOTE: The UE may use the time information for numerous purposes, possibly involving upper layers e.g. to assist GPS initialisation, to synchronise the UE clock (a.o. to determine MBMS session start/ stop).

***SystemInformationBlockType16* information element**

```
-- ASN1START

SystemInformationBlockType16-r11 ::=        SEQUENCE {
    timeInfo-r11                            SEQUENCE {
        timeInfoUTC-r11                         INTEGER (0..549755813887),
        dayLightSavingTime-r11                  BIT STRING (SIZE (2))       OPTIONAL,   -- Need OR
        leapSeconds-r11                         INTEGER (-127..128)         OPTIONAL,   -- Need OR
        localTimeOffset-r11                     INTEGER (-63..64)           OPTIONAL    -- Need OR
    }                                                                       OPTIONAL,   -- Need OR
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    ...
}
```


DAINGEAN_0002097

```
-- ASN1STOP
```

***SystemInformationBlockType16* field descriptions**
dayLightSavingTime
It indicates if and how daylight saving time (DST) is applied to obtain the local time. The semantics is the same as the semantics of the *Daylight Saving Time* IE in TS 24.301 [35] and TS 24.008 [49]. The first/leftmost bit of the bit string contains the b2 of octet 3, i.e. the value part of the *Daylight Saving Time* IE, and the second bit of the bit string contains b1 of octet 3.
leapSeconds
Number of leap seconds offset between GPS Time and UTC. UTC and GPS time are related i.e. GPS time - *leapSeconds* = UTC time.
localTimeOffset
Offset between UTC and local time in units of 15 minutes. Actual value = field value * 15 minutes. Local time of the day is calculated as UTC time + *localTimeOffset*.
timeInfoUTC
Coordinated Universal Time corresponding to the SFN boundary at or immediately after the ending boundary of the SI-window in which *SystemInformationBlockType16* is transmitted. The field counts the number of UTC seconds in 10 ms units since 00:00:00 on Gregorian calendar date 1 January, 1900 (midnight between Sunday, December 31, 1899 and Monday, January 1, 1900), including leap seconds and other additions prior to 1972. NOTE 1. This field is excluded when estimating changes in system information, i.e. changes of *timeInfoUTC* should neither result in system information change notifications nor in a modification of *systemInfoValueTag* in SIB1.

NOTE 1: For the sake of the field definition, it is assumed UTC existed prior to 1 January 1972. As this field counts total elapsed time, conversion to calendar UTC time needs to allow for leap second and other calendar adjustments since 1 January 1900. For example, time 00:00 on 1 January 1972 UTC corresponds to a *timeInfoUTC* of 2,272,060,800 seconds.

– *SystemInformationBlockType17*

The IE *SystemInformationBlockType17* contains information relevant for traffic steering between E-UTRAN and WLAN.

***SystemInformationBlockType17* information element**

```
-- ASN1START

SystemInformationBlockType17-r12 ::=    SEQUENCE {
    wlan-OffloadInfoPerPLMN-List-r12        SEQUENCE (SIZE (1..maxPLMN-r11)) OF
                                            WLAN-OffloadInfoPerPLMN-r12          OPTIONAL, -- Need OR
    lateNonCriticalExtension                OCTET STRING                         OPTIONAL,
    ...
}

WLAN-OffloadInfoPerPLMN-r12 ::=             SEQUENCE {
        wlan-OffloadConfigCommon-r12        WLAN-OffloadConfig-r12      OPTIONAL,   -- Need OR
        wlan-Id-List-r12                    WLAN-Id-List-r12            OPTIONAL,   -- Need OR
        ...
}

WLAN-Id-List-r12 ::=                SEQUENCE (SIZE (1..maxWLAN-Id-r12)) OF WLAN-Identifiers-r12

WLAN-Identifiers-r12 ::=            SEQUENCE {
    ssid-r12                        OCTET STRING (SIZE (1..32))     OPTIONAL,   -- Need OR
    bssid-r12                       OCTET STRING (SIZE (6))             OPTIONAL,   -- Need OR
    hessid-r12                      OCTET STRING (SIZE (6))             OPTIONAL,   -- Need OR
    ...
}

-- ASN1STOP
```

***SystemInformationBlockType17* field descriptions**
bssid
Basic Service Set Identifier (BSSID) defined in IEEE 802.11-2012 [67].
hessid
Homogenous Extended Service Set Identifier (HESSID) defined in IEEE 802.11-2012 [67].

DAINGEAN_0002098

SystemInformationBlockType17 field descriptions
ssid Service Set Identifier (SSID) defined in IEEE 802.11-2012 [67].
wlan-OffloadInfoPerPLMN-List The WLAN offload configuration per PLMN includes the same number of entries, listed in the same order as the PLMN(s) in *plmn-IdentityList* in *SystemInformationBlockType1*.

– SystemInformationBlockType18

The IE *SystemInformationBlockType18* indicates E-UTRAN supports the sidelink UE information procedure and may contain sidelink communication related resource configuration information.

SystemInformationBlockType18 information element

```
-- ASN1START

SystemInformationBlockType18-r12 ::= SEQUENCE {
    commConfig-r12                      SEQUENCE {
        commRxPool-r12                      SL-CommRxPoolList-r12,
        commTxPoolNormalCommon-r12          SL-CommTxPoolList-r12           OPTIONAL,   -- Need OR
        commTxPoolExceptional-r12           SL-CommTxPoolList-r12           OPTIONAL,   -- Need OR
        commSyncConfig-r12                  SL-SyncConfigList-r12       OPTIONAL    -- Need OR
    }                                                                       OPTIONAL,   -- Need OR
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    ...,
    [[  commTxPoolNormalCommonExt-r13           SL-CommTxPoolListExt-r13    OPTIONAL,   -- Need OR
        commTxResourceUC-ReqAllowed-r13         ENUMERATED {true}       OPTIONAL,   -- Need OR
        commTxAllowRelayCommon-r13              ENUMERATED {true}           OPTIONAL    -- Need OR
    ]]
}

-- ASN1STOP
```

SystemInformationBlockType18 field descriptions
commRxPool Indicates the resources by which the UE is allowed to receive sidelink communication while in RRC_IDLE and while in RRC_CONNECTED.
commSyncConfig Indicates the configuration by which the UE is allowed to receive and transmit synchronisation information. E-UTRAN configures *commSyncConfig* including *txParameters* when configuring UEs by dedicated signalling to transmit synchronisation information.
commTxAllowRelayCommon Indicates whether the UE is allowed to transmit relay related sidelink communication data using the transmission pools included in *SystemInformationBlockType18* i.e. either via *commTxPoolNormalCommon*, *commTxPoolNormalCommonExt* or via *commTxPoolExceptional*.
commTxPoolExceptional Indicates the resources by which the UE is allowed to transmit sidelink communication in exceptional conditions, as specified in 5.10.4.
commTxPoolNormalCommon Indicates the resources by which the UE is allowed to transmit sidelink communication while in RRC_IDLE or when in RRC_CONNECTED while transmitting sidelink via a frequency other than the primary.
commTxPoolNormalCommonExt Indicates transmission resource pool(s) in addition to the pool(s) indicated by field *commTxPoolNormalCommon*, by which the UE is allowed to transmit sidelink communication while in RRC_IDLE or when in RRC_CONNECTED while transmitting sidelink via a frequency other than the primary. E-UTRAN configures *commTxPoolNormalCommonExt* only when it configures *commTxPoolNormalCommon*.
commTxResourceUC-ReqAllowed Indicates whether the UE is allowed to request transmission pools for non-relay related one-to-one sidelink communication.

– SystemInformationBlockType19

The IE *SystemInformationBlockType19* indicates E-UTRAN supports the sidelink UE information procedure and may contain sidelink discovery related resource configuration information.

DAINGEAN_0002099

SystemInformationBlockType19 information element

```
-- ASN1START

SystemInformationBlockType19-r12 ::= SEQUENCE {
    discConfig-r12                      SEQUENCE {
        discRxPool-r12                      SL-DiscRxPoolList-r12,
        discTxPoolCommon-r12                SL-DiscTxPoolList-r12           OPTIONAL,   -- Need OR
        discTxPowerInfo-r12                 SL-DiscTxPowerInfoList-r12  OPTIONAL,   -- Cond Tx
        discSyncConfig-r12                  SL-SyncConfigList-r12       OPTIONAL    -- Need OR
    }                                                                       OPTIONAL,   -- Need OR
    discInterFreqList-r12               SL-CarrierFreqInfoList-r12      OPTIONAL,   -- Need OR
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    ...,
    [[  discConfig-v1310                SEQUENCE {
            discInterFreqList-v1310         SL-CarrierFreqInfoList-v1310    OPTIONAL,   -- Need OR
            gapRequestsAllowedCommon        ENUMERATED {true}           OPTIONAL    -- Need OR
        }                                                               OPTIONAL,   -- Need OR
        discConfigRelay-r13             SEQUENCE {
            relayUE-Config-r13              SL-DiscConfigRelayUE-r13,
            remoteUE-Config-r13             SL-DiscConfigRemoteUE-r13
        }                                                               OPTIONAL,   -- Need OR
        discConfigPS-r13                SEQUENCE {
            discRxPoolPS-r13                SL-DiscRxPoolList-r12,
            discTxPoolPS-Common-r13         SL-DiscTxPoolList-r12       OPTIONAL    -- Need OR
        }                                                               OPTIONAL    -- Need OR
    ]]
}

SL-CarrierFreqInfoList-r12 ::=  SEQUENCE (SIZE (1..maxFreq)) OF SL-CarrierFreqInfo-r12

SL-CarrierFreqInfoList-v1310 ::=    SEQUENCE (SIZE (1..maxFreq)) OF SL-CarrierFreqInfo-v1310

SL-CarrierFreqInfo-r12::=       SEQUENCE {
    carrierFreq-r12                 ARFCN-ValueEUTRA-r9,
    plmn-IdentityList-r12           PLMN-IdentityList4-r12          OPTIONAL    -- Need OP
}

SL-DiscConfigRelayUE-r13    ::= SEQUENCE {
    threshHigh-r13          RSRP-RangeSL4-r13                       OPTIONAL,   -- Need OR
    threshLow-r13           RSRP-RangeSL4-r13                       OPTIONAL,   -- Need OR
    hystMax-r13             ENUMERATED {dB0, dB3, dB6, dB9, dB12, dBinf}    OPTIONAL,   -- Cond
ThreshHigh
    hystMin-r13             ENUMERATED {dB0, dB3, dB6, dB9, dB12}   OPTIONAL    -- Cond ThreshLow
}

SL-DiscConfigRemoteUE-r13   ::= SEQUENCE {
    threshHigh-r13          RSRP-RangeSL4-r13                       OPTIONAL,   -- Need OR
    hystMax-r13             ENUMERATED {dB0, dB3, dB6, dB9, dB12}   OPTIONAL,   -- Cond ThreshHigh
    reselectionInfoIC-r13   ReselectionInfoRelay-r13
}

ReselectionInfoRelay-r13 ::=    SEQUENCE {
    q-RxLevMin-r13                  Q-RxLevMin,
    -- Note that the mapping of invidual values may be different for PC5, but the granularity/
    -- number of values is same as for Uu
    filterCoefficient-r13           FilterCoefficient,
    minHyst-r13                 ENUMERATED {dB0, dB3,
                                    dB6, dB9, dB12, dBinf}  OPTIONAL    -- Need OR
}

SL-CarrierFreqInfo-v1310::=     SEQUENCE {
    discResourcesNonPS-r13          SL-ResourcesInterFreq-r13       OPTIONAL,   -- Need OR
    discResourcesPS-r13             SL-ResourcesInterFreq-r13       OPTIONAL,   -- Need OR
    discConfigOther-r13         SL-DiscConfigOtherInterFreq-r13     OPTIONAL,   -- Need OR
    ...
}

PLMN-IdentityList4-r12 ::=  SEQUENCE (SIZE (1..maxPLMN-r11)) OF PLMN-IdentityInfo2-r12

PLMN-IdentityInfo2-r12 ::=      CHOICE  {
    plmn-Index-r12                  INTEGER (1..maxPLMN-r11),
    plmnIdentity-r12                PLMN-Identity
}

SL-DiscTxResourcesInterFreq-r13 ::= CHOICE {
    acquireSI-FromCarrier-r13       NULL,
    discTxPoolCommon-r13            SL-DiscTxPoolList-r12,
```


DAINGEAN_0002100

```
    requestDedicated-r13            NULL,
    noTxOnCarrier-r13               NULL
}

SL-DiscConfigOtherInterFreq-r13::=  SEQUENCE {
    txPowerInfo-r13                 SL-DiscTxPowerInfoList-r12          OPTIONAL,   -- Cond Tx
    refCarrierCommon-r13            ENUMERATED {pCell}                  OPTIONAL,   -- Need OR
    discSyncConfig-r13              SL-SyncConfigListNFreq-r13          OPTIONAL,   -- Need OR
    discCellSelectionInfo-r13       CellSelectionInfoNFreq-r13          OPTIONAL    -- Need OR
}

SL-ResourcesInterFreq-r13 ::= SEQUENCE {
    discRxResourcesInterFreq-r13    SL-DiscRxPoolList-r12               OPTIONAL,   -- Need OR
    discTxResourcesInterFreq-r13    SL-DiscTxResourcesInterFreq-r13     OPTIONAL    -- Need OR
}

-- ASN1STOP
```

***SystemInformationBlockType19* field descriptions**
discCellSelectionInfo Parameters that may be used by the UE to select/ reselect a cell on the concerned non serving frequency. If absent, the UE acquires the information from the target cell on the concerned frequency. See TS 36.304 [4, 11.4].
discInterFreqList Indicates the neighbouring frequencies on which sidelink discovery announcement is supported. May also provide further information i.e. reception resource pool and/ or transmission resource pool, or an indication how resources could be obtained.
discRxPool Indicates the resources by which the UE is allowed to receive non-PS related sidelink discovery announcements while in RRC_IDLE and while in RRC_CONNECTED.
discRxPoolPS Indicates the resources by which the UE is allowed to receive PS related sidelink discovery announcements while in RRC_IDLE and while in RRC_CONNECTED.
discRxResourcesInterFreq Indicates the resource pool configuration for receiving discovery announcements on a carrier frequency.
discSyncConfig Indicates the configuration by which the UE is allowed to receive and transmit synchronisation information. E-UTRAN configures *discSyncConfig* including *txParameters* when configuring UEs by dedicated signalling to transmit synchronisation information.
discTxPoolCommon Indicates the resources by which the UE is allowed to transmit non-PS related sidelink discovery announcements while in RRC_IDLE.
discTxPoolPS-Common Indicates the resources by which the UE is allowed to transmit PS related sidelink discovery announcements while in RRC_IDLE.
discTxResourcesInterFreq For the concerned frequency, either provides the UE with a pool of sidelink discovery announcement transmission resources the UE is allowed to use while in RRC_IDLE, or indicates whether such transmission is allowed, and if so how the UE may obtain the required resources. Value *noTxOnCarrier* indicates that the UE is not allowed to transmit sidelink discovery announcements on the concerned frequency. Value *acquireSI-FromCarrier* indicates that the required resources are to be obtained by autonomously acquiring SIB19 and other relevant SIBs from the concerned frequency. Value *requestDedicated* indicates, that for the concerned carrier, the required sidelink discovery resources are to be obtained by means of a dedicated resource request using the *SidelinkUEInformation* message.
plmn-IdentityList List of PLMN identities for the neighbouring frequency indicated by *carrierFreq*. Absence of the field indicates the same PLMN identities as listed in *plmn-IdentityList* (without suffix) in *SystemInformationBlockType1*.
plmn-Index Index of the corresponding entry in field *plmn-IdentityList* (without suffix) within *SystemInformationBlockType1*.
refCarrierCommon Indicates if the PCell (RRC_CONNECTED)/ serving cell (RRC_IDLE) is to be used as reference for DL measurements and synchronization, instead of the DL frequency paired with the one used to transmit sidelink discovery announcements on, see TS 36.213 [23, 14.3.1].
reselectionInfoIC Includes the parameters used by the UE when selecting/ reselecting a sidelink relay UE.
SL-CarrierFreqInfoList-v1310 If included, the UE shall include the same number of entries, and listed in the same order, as in *SL-CarrierFreqInfoList-r12*.

DAINGEAN_0002101

SystemInformationBlockType19 field descriptions
threshHigh, threshLow (relayUE)
Indicates when a sidelink remote UE or sidelink relay UE that is in network coverage may use the broadcast PS related sidelink discovery Tx resource pool, if broadcast, or request Tx resources by dedicated signalling otherwise. For remote UEs, this parameter is used similarly for relay related sidelink communication.

Conditional presence	Explanation
ThreshHigh	The field is mandatory present if *threshHigh* is included in the corresponding IE. Otherwise the field is not present and UE shall delete any existing value for this field.
ThreshLow	The field is mandatory present if *threshLow* is included. Otherwise the field is not present UE shall delete any existing value for this field.
Tx	The field is mandatory present if *discTxPoolCommon* is included. Otherwise the field is optional present, need OR.

– *SystemInformationBlockType20*

The IE *SystemInformationBlockType20* contains the information required to acquire the control information associated transmission of MBMS using SC-PTM.

SystemInformationBlockType20 information element

```
-- ASN1START

SystemInformationBlockType20-r13 ::=     SEQUENCE {
    sc-mcch-RepetionPeriod-r13      ENUMERATED {rf2, rf4, rf8, rf16, rf32, rf64, rf128, rf256},
    sc-mcch-Offset-r13              INTEGER (0..10),
    sc-mcch-FirstSubframe-r13       INTEGER (0..9),
    sc-mcch-duration-r13            INTEGER (2..9)  OPTIONAL,
    sc-mcch-ModificationPeriod-r13  ENUMERATED {rf2, rf4, rf8, rf16, rf32, rf64, rf128, rf256,
                                        rf512, rf1024, r2048, rf4096, rf8192, rf16384, rf32768,
                                            rf65536},
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    ...
}

-- ASN1STOP
```

SystemInformationBlockType20 field descriptions
sc-mcch-ModificationPeriod
Defines periodically appearing boundaries, i.e. radio frames for which SFN mod *sc-mcch-ModificationPeriod* = 0. The contents of different transmissions of SC-MCCH information can only be different if there is at least one such boundary in-between them. Value rf2 corresponds to 2 radio frames, value rf4 corresponds to 4 radio frames and so on.
sc-mcch-duration
Indicates, starting from the subframe indicated by *sc-mcch-FirstSubframe*, the duration in subframes during which SC-MCCH may be scheduled in PDCCH sub-frames, see TS 36.321 [6]. Absence of this IE means that SC-MCCH is only scheduled in the subframe indicated by *sc-mcch-FirstSubframe*.
sc-mcch-Offset
Indicates, together with the *sc-mcch-RepetitionPeriod*, the radio frames in which SC-MCCH is scheduled i.e. SC-MCCH is scheduled in radio frames for which: SFN mod sc-*mcch-RepetitionPeriod* = *sc-mcch-Offset*.
sc-mcch-FirstSubframe
Indicates the first subframe in which SC-MCCH is scheduled
sc-mcch-RepetitionPeriod
Defines the interval between transmissions of SC-MCCH information, in radio frames. Value rf2 corresponds to 2 radio frames, rf4 corresponds to 4 radio frames and so on.

6.3.2 Radio resource control information elements

– *AntennaInfo*

The IE *AntennaInfoCommon* and the *AntennaInfoDedicated* are used to specify the common and the UE specific antenna configuration respectively.

DAINGEAN_0002102

AntennaInfo information elements

```
-- ASN1START

AntennaInfoCommon ::=               SEQUENCE {
    antennaPortsCount                   ENUMERATED {an1, an2, an4, spare1}
}

AntennaInfoDedicated ::=            SEQUENCE {
    transmissionMode                    ENUMERATED {
                                            tm1, tm2, tm3, tm4, tm5, tm6,
                                            tm7, tm8-v920},
    codebookSubsetRestriction           CHOICE {
        n2TxAntenna-tm3                     BIT STRING (SIZE (2)),
        n4TxAntenna-tm3                     BIT STRING (SIZE (4)),
        n2TxAntenna-tm4                     BIT STRING (SIZE (6)),
        n4TxAntenna-tm4                     BIT STRING (SIZE (64)),
        n2TxAntenna-tm5                     BIT STRING (SIZE (4)),
        n4TxAntenna-tm5                     BIT STRING (SIZE (16)),
        n2TxAntenna-tm6                     BIT STRING (SIZE (4)),
        n4TxAntenna-tm6                     BIT STRING (SIZE (16))
    }       OPTIONAL,                                                   -- Cond TM
    ue-TransmitAntennaSelection         CHOICE{
            release                         NULL,
            setup                           ENUMERATED {closedLoop, openLoop}
    }
}

AntennaInfoDedicated-v920 ::=       SEQUENCE {
    codebookSubsetRestriction-v920      CHOICE {
        n2TxAntenna-tm8-r9                  BIT STRING (SIZE (6)),
        n4TxAntenna-tm8-r9                  BIT STRING (SIZE (32))
    }       OPTIONAL                                                    -- Cond TM8
}

AntennaInfoDedicated-r10 ::=        SEQUENCE {
    transmissionMode-r10                ENUMERATED {
                                            tm1, tm2, tm3, tm4, tm5, tm6, tm7, tm8-v920,
                                            tm9-v1020, tm10-v1130, spare6, spare5, spare4,
                                            spare3, spare2, spare1},
    codebookSubsetRestriction-r10       BIT STRING          OPTIONAL,       -- Cond TMX
    ue-TransmitAntennaSelection     CHOICE{
        release                         NULL,
        setup                           ENUMERATED {closedLoop, openLoop}
    }
}

AntennaInfoDedicated-v10i0::=   SEQUENCE {
    maxLayersMIMO-r10           ENUMERATED {twoLayers, fourLayers, eightLayers}     OPTIONAL    --
Need OR
}

AntennaInfoDedicated-v1250 ::=      SEQUENCE {
    alternativeCodebookEnabledFor4TX-r12    BOOLEAN
}

-- ASN1STOP
```


DAINGEAN_0002103

***AntennaInfo* field descriptions**
alternativeCodebookEnabledFor4TX Indicates whether code book in TS 36.213 [23] Table 7.2.4-0A to Table 7.2.4-0D is being used for deriving CSI feedback and reporting. E-UTRAN only configures the field if the UE is configured with a) *tm8* with 4 CRS ports, *tm9* or *tm10* with 4 CSI-RS ports and b) PMI/RI reporting.
antennaPortsCount Parameter represents the number of cell specific antenna ports where an1 corresponds to 1, an2 to 2 antenna ports etc. see TS 36.211 [21, 6.2.1].
codebookSubsetRestriction Parameter: *codebookSubsetRestriction,* see TS 36.213 [23, 7.2] and TS 36.211 [21, 6.3.4.2.3]. The number of bits in the *codebookSubsetRestriction* for applicable transmission modes is defined in TS 36.213 [23, Table 7.2-1b]. If the UE is configured with *transmissionMode* tm8, E-UTRAN configures the field *codebookSubsetRestriction* if PMI/RI reporting is configured. If the UE is configured with *transmissionMode* tm9, E-UTRAN configures the field *codebookSubsetRestriction* if PMI/RI reporting is configured and if the number of CSI-RS ports is greater than 1. E-UTRAN does not configure the field *codebookSubsetRestriction* in other cases where the UE is configured with *transmissionMode* tm8 or tm9. Furthermore, E-UTRAN does not configure the field *codebookSubsetRestriction* if the UE is configured with *eMIMO-Type* unless it is set to *beamformed*, *alternativeCodebookEnabledBeamformed* is set to *FALSE* and *csi-RS-ConfigNZPIdListExt* is not configured.
maxLayersMIMO Indicates the maximum number of layers for spatial multiplexing used to determine the rank indication bit width and Kc determination of the soft buffer size for the corresponding serving cell according to TS 36.212 [22]. EUTRAN configures this field only when *transmissionMode* is set to *tm3*, *tm4*, *tm9* or *tm10* for the corresponding serving cell. When configuring the field for a serving cell which *transmissionMode* is set to *tm3* or *tm4*, EUTRAN only configures value *fourLayers*: For a serving cell which *transmissionMode* is set to *tm9* or *tm10*, EUTRAN only configures the field only if *intraBandContiguousCC-InfoList* is indicated for the band and the band combination of the corresponding serving cell.
transmissionMode Points to one of Transmission modes defined in TS 36.213 [23, 7.1] where tm1 refers to transmission mode 1, tm2 to transmission mode 2 etc.
ue-TransmitAntennaSelection For value *setup* the field indicates whether UE transmit antenna selection control is closed-loop or open-loop as described in TS 36.213 [23, 8.7]. EUTRAN configures the same value for all serving cells.

Conditional presence	Explanation
TM	The field is mandatory present if the *transmissionMode* is set to tm3, tm4, tm5 or tm6. Otherwise the field is not present and the UE shall delete any existing value for this field.
TM8	The field is optional present, need OR, if *AntennaInfoDedicated* is included and *transmissionMode* is set to *tm8*. If *AntennaInfoDedicated* is included and *transmissionMode* is set to a value other than *tm8*, the field is not present and the UE shall delete any existing value for this field. Otherwise the field is not present.
TMX	The field is mandatory present if the *transmissionMode-r10* is set to *tm3*, *tm4*, *tm5* or *tm6*. The field is optionally present, need OR, if the *transmissionMode-r10* is set to *tm8* or *tm9*. Otherwise the field is not present and the UE shall delete any existing value for this field.

– *AntennaInfoUL*

The IE *AntennaInfoUL* is used to specify the UL antenna configuration.

***AntennaInfoUL* information elements**

```
-- ASN1START

AntennaInfoUL-r10 ::=       SEQUENCE {
    transmissionModeUL-r10              ENUMERATED {tm1, tm2, spare6, spare5,
                                                    spare4, spare3, spare2, spare1} OPTIONAL,   --
Need OR
    fourAntennaPortActivated-r10            ENUMERATED {setup}          OPTIONAL        -- Need OR
}

-- ASN1STOP
```


DAINGEAN_0002104

***AntennaInfoUL* field descriptions**
fourAntennaPortActivated Parameter indicates if four antenna ports are used. See TS 36.213 [23, 8.2]. E-UTRAN optionally configures *fourAntennaPortActivated* only if *transmissionModeUL* is set to *tm2*.
transmissionModeUL Points to one of UL Transmission modes defined in TS 36.213 [23, 8.0] where tm1 refers to transmission mode 1, tm2 to transmission mode 2 etc.

– *CQI-ReportConfig*

The IE *CQI-ReportConfig* is used to specify the CQI reporting configuration.

***CQI-ReportConfig* information elements**

```
-- ASN1START

CQI-ReportConfig ::=                SEQUENCE {
    cqi-ReportModeAperiodic         CQI-ReportModeAperiodic OPTIONAL,          -- Need OR
    nomPDSCH-RS-EPRE-Offset             INTEGER (-1..6),
    cqi-ReportPeriodic              CQI-ReportPeriodic  OPTIONAL               -- Need ON
}

CQI-ReportConfig-v920 ::=       SEQUENCE {
    cqi-Mask-r9                     ENUMERATED {setup}      OPTIONAL,       -- Cond cqi-Setup
    pmi-RI-Report-r9                ENUMERATED {setup}      OPTIONAL        -- Cond PMIRI
}

CQI-ReportConfig-r10 ::=    SEQUENCE {
    cqi-ReportAperiodic-r10             CQI-ReportAperiodic-r10         OPTIONAL,   -- Need ON
    nomPDSCH-RS-EPRE-Offset         INTEGER (-1..6),
    cqi-ReportPeriodic-r10              CQI-ReportPeriodic-r10          OPTIONAL,   -- Need ON
    pmi-RI-Report-r9                    ENUMERATED {setup}              OPTIONAL,   -- Cond
PMIRIPCell
    csi-SubframePatternConfig-r10       CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            csi-MeasSubframeSet1-r10            MeasSubframePattern-r10,
            csi-MeasSubframeSet2-r10            MeasSubframePattern-r10
        }
    }                                                                       OPTIONAL    -- Need ON
}

CQI-ReportConfig-v1130 ::=  SEQUENCE {
    cqi-ReportPeriodic-v1130            CQI-ReportPeriodic-v1130,
    cqi-ReportBoth-r11                  CQI-ReportBoth-r11
}

CQI-ReportConfig-v1250 ::=      SEQUENCE {
    csi-SubframePatternConfig-r12       CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            csi-MeasSubframeSets-r12            BIT STRING (SIZE (10))
        }
    }                                                               OPTIONAL,   -- Need ON
    cqi-ReportBoth-v1250                    CQI-ReportBoth-v1250        OPTIONAL,   -- Need ON
    cqi-ReportAperiodic-v1250   CQI-ReportAperiodic-v1250       OPTIONAL,   -- Need ON
    altCQI-Table-r12            ENUMERATED {
                                    allSubframes, csi-SubframeSet1,
                                    csi-SubframeSet2, spare1}       OPTIONAL        -- Need OP
}

CQI-ReportConfig-v1310 ::=          SEQUENCE {
        cqi-ReportBoth-v1310                CQI-ReportBoth-v1310        OPTIONAL,   -- Need ON
        cqi-ReportAperiodic-v1310           CQI-ReportAperiodic-v1310   OPTIONAL,       -- Need ON
        cqi-ReportPeriodic-v1310            CQI-ReportPeriodic-v1310    OPTIONAL        -- Need ON
}

CQI-ReportConfig-v1320 ::=          SEQUENCE {
        cqi-ReportPeriodic-v1320            CQI-ReportPeriodic-v1320    OPTIONAL    -- Need ON
}

CQI-ReportConfigSCell-r10 ::=               SEQUENCE {
    cqi-ReportModeAperiodic-r10         CQI-ReportModeAperiodic OPTIONAL,          -- Need OR
    nomPDSCH-RS-EPRE-Offset-r10             INTEGER (-1..6),
```


DAINGEAN_0002105

```
    cqi-ReportPeriodicSCell-r10         CQI-ReportPeriodic-r10          OPTIONAL,    -- Need ON
    pmi-RI-Report-r10                   ENUMERATED {setup}              OPTIONAL     -- Cond
PMIRISCell1
}

CQI-ReportPeriodic ::=      CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        cqi-PUCCH-ResourceIndex             INTEGER (0..1185),
        cqi-pmi-ConfigIndex                 INTEGER (0..1023),
        cqi-FormatIndicatorPeriodic         CHOICE {
            widebandCQI                         NULL,
            subbandCQI                          SEQUENCE {
                k                                   INTEGER (1..4)
            }
        },
        ri-ConfigIndex                      INTEGER (0..1023)   OPTIONAL,               -- Need OR
        simultaneousAckNackAndCQI           BOOLEAN
    }
}

CQI-ReportPeriodic-r10 ::=      CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        cqi-PUCCH-ResourceIndex-r10         INTEGER (0..1184),
        cqi-PUCCH-ResourceIndexP1-r10       INTEGER (0..1184)               OPTIONAL,   -- Need OR
        cqi-pmi-ConfigIndex                 INTEGER (0..1023),
        cqi-FormatIndicatorPeriodic-r10     CHOICE {
            widebandCQI-r10                     SEQUENCE {
                csi-ReportMode-r10          ENUMERATED {submode1, submode2}     OPTIONAL    -- Need OR
            },
            subbandCQI-r10                      SEQUENCE {
                k                               INTEGER (1..4),
                periodicityFactor-r10               ENUMERATED {n2, n4}
            }
        },
        ri-ConfigIndex                      INTEGER (0..1023)       OPTIONAL,           -- Need OR
        simultaneousAckNackAndCQI           BOOLEAN,
        cqi-Mask-r9                         ENUMERATED {setup}      OPTIONAL,           -- Need OR
        csi-ConfigIndex-r10                 CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                cqi-pmi-ConfigIndex2-r10            INTEGER (0..1023),
                ri-ConfigIndex2-r10                 INTEGER (0..1023)       OPTIONAL    -- Need OR
            }
        }       OPTIONAL                                                            -- Need ON
    }
}


CQI-ReportPeriodic-v1130 ::=    SEQUENCE {
    simultaneousAckNackAndCQI-Format3-r11       ENUMERATED {setup}      OPTIONAL,   -- Need OR
    cqi-ReportPeriodicProcExtToReleaseList-r11  CQI-ReportPeriodicProcExtToReleaseList-r11
    OPTIONAL,   -- Need ON
    cqi-ReportPeriodicProcExtToAddModList-r11   CQI-ReportPeriodicProcExtToAddModList-r11   OPTIONAL
    -- Need ON
}

CQI-ReportPeriodic-v1310 ::=    SEQUENCE {
    cri-ReportConfig-r13            CRI-ReportConfig-r13                OPTIONAL,   -- Need OR
    simultaneousAckNackAndCQI-Format4-Format5-r13       ENUMERATED {setup}      OPTIONAL-- Need OR
}

CQI-ReportPeriodic-v1320 ::=    SEQUENCE {
    periodicityFactorWB-r13         ENUMERATED {n2, n4}         OPTIONAL        -- Need OR
}

CQI-ReportPeriodicProcExtToAddModList-r11 ::=       SEQUENCE (SIZE (1..maxCQI-ProcExt-r11)) OF CQI-
ReportPeriodicProcExt-r11

CQI-ReportPeriodicProcExtToReleaseList-r11 ::=  SEQUENCE (SIZE (1..maxCQI-ProcExt-r11)) OF CQI-
ReportPeriodicProcExtId-r11

CQI-ReportPeriodicProcExt-r11 ::=       SEQUENCE {
    cqi-ReportPeriodicProcExtId-r11 CQI-ReportPeriodicProcExtId-r11,
    cqi-pmi-ConfigIndex-r11         INTEGER (0..1023),
    cqi-FormatIndicatorPeriodic-r11 CHOICE {
        widebandCQI-r11             SEQUENCE {
```


DAINGEAN_0002106

```
            csi-ReportMode-r11          ENUMERATED {submode1, submode2} OPTIONAL    -- Need OR
        },
        subbandCQI-r11              SEQUENCE {
            k                           INTEGER (1..4),
            periodicityFactor-r11       ENUMERATED {n2, n4}
        }
    },
    ri-ConfigIndex-r11              INTEGER (0..1023)                   OPTIONAL,   -- Need OR
    csi-ConfigIndex-r11             CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            cqi-pmi-ConfigIndex2-r11        INTEGER (0..1023),
            ri-ConfigIndex2-r11             INTEGER (0..1023)       OPTIONAL        -- Need OR
        }
    }                                                               OPTIONAL,       -- Need ON
    ...,
    [[  cri-ReportConfig-r13            CRI-ReportConfig-r13                OPTIONAL    -- Need ON
    ]],
    [[  periodicityFactorWB-r13         ENUMERATED {n2, n4}         OPTIONAL        -- Need ON
    ]]
}

CQI-ReportAperiodic-r10 ::=     CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        cqi-ReportModeAperiodic-r10         CQI-ReportModeAperiodic,
        aperiodicCSI-Trigger-r10            SEQUENCE {
            trigger1-r10                        BIT STRING (SIZE (8)),
            trigger2-r10                        BIT STRING (SIZE (8))
        }                                                           OPTIONAL    -- Need OR
    }
}

CQI-ReportAperiodic-v1250   ::=     CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        aperiodicCSI-Trigger-v1250          SEQUENCE {
            trigger-SubframeSetIndicator-r12    ENUMERATED {s1, s2},
            trigger1-SubframeSetIndicator-r12   BIT STRING (SIZE (8)),
            trigger2-SubframeSetIndicator-r12   BIT STRING (SIZE (8))
        }
    }
}

CQI-ReportAperiodic-v1310   ::=     CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        aperiodicCSI-Trigger-v1310          SEQUENCE {
            trigger1-r13                        BIT STRING (SIZE (32)),
            trigger2-r13                        BIT STRING (SIZE (32)),
            trigger3-r13                        BIT STRING (SIZE (32)),
            trigger4-r13                        BIT STRING (SIZE (32)),
            trigger5-r13                        BIT STRING (SIZE (32)),
            trigger6-r13                        BIT STRING (SIZE (32))
        }                                                           OPTIONAL,   -- Need ON
        aperiodicCSI-Trigger2-r13           CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                trigger1-SubframeSetIndicator-r13   BIT STRING (SIZE (32)),
                trigger2-SubframeSetIndicator-r13   BIT STRING (SIZE (32)),
                trigger3-SubframeSetIndicator-r13   BIT STRING (SIZE (32)),
                trigger4-SubframeSetIndicator-r13   BIT STRING (SIZE (32)),
                trigger5-SubframeSetIndicator-r13   BIT STRING (SIZE (32)),
                trigger6-SubframeSetIndicator-r13   BIT STRING (SIZE (32))
            }
        }                                                           OPTIONAL    -- Need ON
    }
}

CQI-ReportAperiodicProc-r11 ::=     SEQUENCE {
    cqi-ReportModeAperiodic-r11         CQI-ReportModeAperiodic,
    trigger01-r11                       BOOLEAN,
    trigger10-r11                       BOOLEAN,
    trigger11-r11                       BOOLEAN
}

CQI-ReportAperiodicProc-v1310   ::=     SEQUENCE {
    trigger001-r13                      BOOLEAN,
```


DAINGEAN_0002107

```
    trigger010-r13                      BOOLEAN,
    trigger011-r13                      BOOLEAN,
    trigger100-r13                      BOOLEAN,
    trigger101-r13                      BOOLEAN,
    trigger110-r13                      BOOLEAN,
    trigger111-r13                      BOOLEAN
}

CQI-ReportModeAperiodic ::=             ENUMERATED {
                                            rm12, rm20, rm22, rm30, rm31,
                                            rm32-v1250, rm10-v1310, rm11-v1310
}

CQI-ReportBoth-r11 ::=          SEQUENCE {
    csi-IM-ConfigToReleaseList-r11      CSI-IM-ConfigToReleaseList-r11  OPTIONAL,    -- Need ON
    csi-IM-ConfigToAddModList-r11       CSI-IM-ConfigToAddModList-r11   OPTIONAL,    -- Need ON
    csi-ProcessToReleaseList-r11        CSI-ProcessToReleaseList-r11    OPTIONAL,    -- Need ON
    csi-ProcessToAddModList-r11         CSI-ProcessToAddModList-r11     OPTIONAL     -- Need ON
}

CQI-ReportBoth-v1250 ::=            SEQUENCE {
    csi-IM-ConfigToReleaseListExt-r12       CSI-IM-ConfigId-v1250   OPTIONAL,    -- Need ON
    csi-IM-ConfigToAddModListExt-r12        CSI-IM-ConfigExt-r12    OPTIONAL     -- Need ON
}

CQI-ReportBoth-v1310 ::=            SEQUENCE {
    csi-IM-ConfigToReleaseListExt-r13   CSI-IM-ConfigToReleaseListExt-r13   OPTIONAL,    -- Need ON
    csi-IM-ConfigToAddModListExt-r13    CSI-IM-ConfigToAddModListExt-r13    OPTIONAL     -- Need ON
}

CSI-IM-ConfigToAddModList-r11 ::=       SEQUENCE (SIZE (1..maxCSI-IM-r11)) OF CSI-IM-Config-r11

CSI-IM-ConfigToAddModListExt-r13 ::=    SEQUENCE (SIZE (1..maxCSI-IM-v1310)) OF CSI-IM-ConfigExt-r12

CSI-IM-ConfigToReleaseList-r11 ::=      SEQUENCE (SIZE (1..maxCSI-IM-r11)) OF CSI-IM-ConfigId-r11

CSI-IM-ConfigToReleaseListExt-r13 ::=   SEQUENCE (SIZE (1..maxCSI-IM-v1310)) OF CSI-IM-ConfigId-
v1310

CSI-ProcessToAddModList-r11 ::=     SEQUENCE (SIZE (1..maxCSI-Proc-r11)) OF CSI-Process-r11

CSI-ProcessToReleaseList-r11 ::=    SEQUENCE (SIZE (1..maxCSI-Proc-r11)) OF CSI-ProcessId-r11

CQI-ReportBothProc-r11 ::=          SEQUENCE {
    ri-Ref-CSI-ProcessId-r11            CSI-ProcessId-r11               OPTIONAL,       -- Need OR
    pmi-RI-Report-r11                   ENUMERATED {setup}              OPTIONAL        -- Need OR
}

CRI-ReportConfig-r13 ::=            CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        cri-ConfigIndex-r13                 CRI-ConfigIndex-r13,
        cri-ConfigIndex2-r13                CRI-ConfigIndex-r13 OPTIONAL    -- Need OR
    }
}

CRI-ConfigIndex-r13 ::=             INTEGER (0..1023)

-- ASN1STOP
```


DAINGEAN_0002108

CQI-ReportConfig field descriptions

altCQI-Table
Indicates the applicability of the alternative CQI table (i.e. Table 7.2.3-2 in TS 36.213 [23]) for both aperiodic and periodic CSI reporting for the concerned serving cell. Value *allSubframes* means the alternative CQI table applies to all the subframes and CSI processes, if configured, and value *csi-SubframeSet1* means the alternative CQI table applies to CSI subframe set1, and value *csi-SubframeSet2* means the alternative CQI table applies to CSI subframe set2. EUTRAN sets the value to *csi-SubframeSet1* or *csi-SubframeSet2* only if *transmissionMode* is set in range *tm1* to *tm9* and *csi-SubframePatternConfig-r10* is configured for the concerned serving cell and different CQI tables apply to the two CSI subframe sets; otherwise EUTRAN sets the value to *allSubframes*. If this field is not present, the UE shall use Table 7.2.3-1 in TS 36.213 [23] for all subframes and CSI processes, if configured.

aperiodicCSI-Trigger
Indicates for which serving cell(s) the aperiodic CSI report is triggered when one or more SCells are configured. *trigger1* corresponds to the CSI request field 10 or 0101, *trigger2* corresponds to the CSI request field 11 or 011, *trigger3* corresponds to the CSI request field 100, see TS 36.213 [23, table 7.2.1-1A], and so on. The leftmost bit, bit 0 in the bit string corresponds to the cell with *ServCellIndex*=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex*=1 etc. Each bit has either value 0 (means no aperiodic CSI report is triggered) or value 1 (means the aperiodic CSI report is triggered). At most 5 bits can be set to value 1 in the bit string in *aperidociCSI-Trigger-r10* and in *aperiodicCSI-Trigger-v1250* and at most 32 bits can be set to value 1 in the bit string in *aperiodicCSI-Trigger-v1310*. E-UTRAN configures value 1 only for cells configured with *transmissionMode* set in range *tm1 to tm9*. One value applies for all serving cells configured with *transmissionMode* set in range *tm1 to tm9* (the associated functionality is common i.e. not performed independently for each cell).

cqi-Mask
Limits CQI/PMI/PTI/RI reports to the on-duration period of the DRX cycle, see TS 36.321 [6]. One value applies for all CSI processes and all serving cells (the associated functionality is common i.e. not performed independently for each cell).

cqi-FormatIndicatorPeriodic
Parameter: *PUCCH CQI Feedback Type,* see TS 36.213 [23, table 7.2.2-1]. Depending on transmissionMode, reporting mode is implicitly given from the table.

cqi-pmi-ConfigIndex
Parameter: *CQI/PMI Periodicity and Offset Configuration Index* $I_{CQI/PMI}$, see TS 36.213 [23, tables 7.2.2-1A and 7.2.2-1C]. If subframe patterns for CSI (CQI/PMI/PTI/RI) reporting are configured (i.e. *csi-SubframePatternConfig* is configured), the parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet1* or corresponding to the CSI subframe set 1 indicated by *csi-MeasSubframeSets-r12*.

cqi-pmi-ConfigIndex2
Parameter: *CQI/PMI Periodicity and Offset Configuration Index* $I_{CQI/PMI}$, see TS 36.213 [23, tables 7.2.2-1A and 7.2.2-1C]. The parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet2* or corresponding to the CSI subframe set 2 indicated by *csi-MeasSubframeSets-r12*.

cqi-PUCCH-ResourceIndex, cqi-PUCCH-ResourceIndexP1
Parameter $n_{\mathrm{PUCCH}}^{(2,p)}$ for antenna port P0 and for antenna port P1 respectively, see TS 36.213 [23, 7.2]. E-UTRAN does not apply value 1185. One value applies for all CSI processes.

cqi-ReportAperiodic
E-UTRAN does not configure *CQI-ReportAperiodic* when transmission mode 10 is configured for all serving cells. E-UTRAN configures *cqi-ReportAperiodic-v1250* only if *cqi-ReportAperiodic-r10* and *csi-MeasSubframeSets-r12* are configured. E-UTRAN configures *cqi-ReportAperiodic-v1310* only if *cqi-ReportAperiodic-r10* is configured.

cqi-ReportModeAperiodic
Parameter: *reporting mode.* Value rm12 corresponds to Mode 1-2, rm20 corresponds to Mode 2-0, rm22 corresponds to Mode 2-2 etc. PUSCH reporting modes are described in TS 36.213 [23, 7.2.1]. The UE shall ignore *cqi-ReportModeAperiodic-r10* when transmission mode 10 is configured for the serving cell on this carrier frequency. The UE shall ignore *cqi-ReportModeAperiodic-r10* configured for the PCell/ PSCell when the transmission bandwidth of the PCell/PSCell in downlink is 6 resource blocks.

CQI-ReportPeriodicProcExt
A set of periodic CQI related parameters for which E-UTRAN may configure different values for each CSI process. For a serving frequency E-UTRAN configures one or more *CQI-ReportPeriodicProcExt* only when transmission mode 10 is configured for the serving cell on this carrier frequency.

cri-ConfigIndex
Parameter: *cri-ConfigIndex* I_{CRI}see TS 36.213 [23]. The parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet1*. EUTRAN configures the field if subframe patterns for CSI (CQI/PMI/PTI/RI/CRI) reporting are configured (i.e. *csi-SubframePatternConfig* is configured).

cri-ConfigIndex2
Parameter: *cri-ConfigIndex* I_{CRI}see TS 36.213 [23]. The parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet2* or corresponding to the CSI subframe set 2 indicated by *csi-MeasSubframeSets*. E-UTRAN configures *cri-ConfigIndex2* only if *cri-ConfigIndex* is configured.

cri-ReportConfig
E-UTRAN configures the field only if the UE is configured with *eMIMO-Type* set to "*beamformed*" and if multiple references to RS configuration using non-zero power transmission are configured (i.e. if *csi-RS-ConfigNZPIdListExt* is configured).

DAINGEAN_0002109

CQI-ReportConfig field descriptions
csi-ConfigIndex E-UTRAN configures *csi-ConfigIndex* only for PCell and only if *csi-SubframePatternConfig* is configured. The UE shall release *csi-ConfigIndex* if *csi-SubframePatternConfig* is released.
csi-IM-ConfigToAddModList For a serving frequency E-UTRAN configures one or more *CSI-IM-Config* only when transmission mode 10 is configured for the serving cell on this carrier frequency.
csi-MeasSubframeSets Indicates the two CSI subframe sets. Value 0 means the subframe belongs to CSI subframe set 1 and value 1 means the subframe belongs to CSI subframe set 2. CSI subframe set 1 refers to $C_{CSI,0}$ in TS 36.213 [23, 7.2] and CSI subframe set 2 refers to $C_{CSI,1}$ in TS 36.213 [23, 7.2]. EUTRAN does not configure *csi-MeasSubframeSet1-r10* and *csi-MeasSubframeSet2-r10* if either *csi-MeasSubframeSets-r12* for PCell or *eimta-MainConfigPCell-r12* is configured.
csi-MeasSubframeSet1, csi-MeasSubframeSet2 Indicates the CSI measurement subframe sets. *csi-MeasSubframeSet1* refers to $C_{CSI,0}$ in TS 36.213 [23, 7.2] and *csi-MeasSubframeSet2* refers to $C_{CSI,1}$ in TS 36.213 [23, 7.2]. E-UTRAN only configures the two CSI measurement subframe sets for the PCell.
csi-ProcessToAddModList For a serving frequency E-UTRAN configures one or more *CSI-Process* only when transmission mode 9 or 10 is configured for the serving cell on this carrier frequency.
csi-ReportMode Parameter: *PUCCH_format1-1_CSI_reporting_mode*, see TS 36.213 [23, 7.2.2].
K Parameter: K, see TS 36.213 [23, 7.2.2].
nomPDSCH-RS-EPRE-Offset Parameter: Δ_{offset} *see* TS 36.213 [23, 7.2.3]. Actual value = field value * 2 [dB].
periodicityFactor, periodicityFactorWB Parameter: H', see TS 36.213 [23, 7.2.2]. EUTRAN configures field *periodicityFactorWB* only when the UE is configured with *eMIMO-Type* set to *nonPrecoded* and with *cqi-FormatIndicatorPeriodic* set to *widebandCQI*.
pmi-RI-Report See TS 36.213 [23, 7.2]. The presence of this field means PMI/RI reporting is configured; otherwise the PMI/RI reporting is not configured. EUTRAN configures this field only when *transmissionMode* is set to *tm8, tm9* or *tm10*. The UE shall ignore *pmi-RI-Report-r9*/ *pmi-RI-Report-r10* when transmission mode 10 is configured for the serving cell on this carrier frequency.
ri-ConfigIndex Parameter: *RI Config Index* I_{RI}, see TS 36.213 [23, 7.2.2-1B]. If subframe patterns for CSI (CQI/PMI/PTI/RI/CRI) reporting are configured (i.e. *csi-SubframePatternConfig* is configured), the parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet1*.
ri-ConfigIndex2 Parameter: *RI Config Index* I_{RI}, see TS 36.213 [23, 7.2.2-1B]. The parameter applies to the subframe pattern corresponding to *csi-MeasSubframeSet2* or corresponding to the CSI subframe set 2 indicated by *csi-MeasSubframeSets-r12*. E-UTRAN configures *ri-ConfigIndex2* only if *ri-ConfigIndex* is configured.
ri-Ref-CSI-ProcessId CSI process whose RI value the UE inherits when reporting RI, in the same subframe, for CSI reporting. E-UTRAN ensures that the CSI process that inherits the RI value is configured in accordance with the conditions specified in TS 36.213 [23, 7.2.1, 7.2.2].
simultaneousAckNackAndCQI Parameter: *Simultaneous-AN-and-CQI*, see TS 36.213 [23, 10.1]. TRUE indicates that simultaneous transmission of ACK/NACK and CQI is allowed. One value applies for all CSI processes. For SCells except for the PSCell and PUCCH SCell this field is not applicable and the UE shall ignore the value.
simultaneousAckNackAndCQI-Format3 Indicates that the UE shall perform simultaneous transmission of HARQ A/N and periodic CQI report multiplexing on PUCCH format 3, see TS 36.213 [23, 7.2, 10.1.1]. E-UTRAN configures this information only when *pucch-Format* is set to *format3*. One value applies for all CSI processes. For SCells except for the PSCell and PUCCH SCell this field is not applicable and the UE shall ignore the value.
simultaneousAckNackAndCQI-Format4-Format5 Indicates that the UE shall perform simultaneous transmission of HARQ A/N and periodic CSI report multiplexing on PUCCH format 4 and format 5, see TS 36.213 [23, 10.1.1]. E-UTRAN configures this information only when *pucch-Format* is set to *format4* or *format5*. One value applies for all CSI processes. For SCells except for the PSCell and PUCCH SCell this field is not applicable and the UE shall ignore the value.
trigger01 Indicates whether or not reporting for this CSI-process or reporting for this CSI-process corresponding to a CSI subframe set is triggered by CSI request field set to 01, for a CSI request applicable for the serving cell on the same frequency as the CSI process, see TS 36.213 [23, table 7.2.1-1D and 7.2.1-1E].

DAINGEAN_0002110

CQI-ReportConfig field descriptions
trigger10, trigger11 Indicates whether or not reporting for this CSI-process or reporting for this CSI-process corresponding to a CSI subframe set is triggered by CSI request field set to 10 or 11, see TS 36.213 [23, table 7.2.1-1B]. EUTRAN configures at most 5 CSI processes, across all serving frequencies within each CG, to be triggered by a CSI request field set to value 10. The same restriction applies for value 11. In case E-UTRAN simultaneously triggers CSI requests for more than 5 CSI processes some limitations apply, see TS 36.213 [23].
trigger001 Indicates whether or not reporting for this CSI-process or reporting for this CSI-process corresponding to a CSI subframe set is triggered by CSI request field set to 001, for a CSI request applicable for the serving cell on the same frequency as the CSI process, see TS 36.213 [23, table 7.2.1-1D and 7.2.1-E].
trigger010, trigger011, trigger100, trigger101, Trigger110, Trigger111 Indicates whether or not reporting for this CSI-process or reporting for this CSI-process corresponding to a CSI subframe set is triggered by CSI request field set to 010, 011, 100, 101, 110 or 111, see TS 36.213 [23, table 7.2.1-1D and 7.2.1-1E].
trigger-SubframeSetIndicator For a serving cell configured with *csi-MeasSubframeSets-r12,* indicates for which CSI subframe set the aperiodic CSI report is triggered for the serving cell if the aperiodic CSI is triggered by the CSI request field 01 or 001, see TS 36.213 [23, table 7.2.1-1C or table 7.2.1.-1E]. Value s1 corresponds to CSI subframe set 1 and value s2 corresponds to CSI subframe set 2.
trigger1-SubframeSetIndicator If signalled in the *aperiodicCSI-Trigger-v1250*, indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field 10, see TS 36.213 [23, table 7.2.1-1C] or by the CSI request field 010, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with *ServCellIndex*=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex*=1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).
trigger2-SubframeSetIndicator If signalled in the *aperiodicCSI-Trigger-v1250*, indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field 11, see TS 36.213 [23, table 7.2.1-1C] or by the CSI request field 011, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with *ServCellIndex*=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex*=1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).
trigger3-SubframeSetIndicator Indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field100, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with *ServCellIndex*=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex* =1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).
trigger4-SubframeSetIndicator Indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field 101, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with ServCellIndex=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex* =1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).
trigger5-SubframeSetIndicator Indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field 110, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with ServCellIndex=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex* =1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).
trigger6-SubframeSetIndicator Indicates for which CSI subframe set the aperiodic CSI report is triggered when aperiodic CSI is triggered by the CSI request field 111, see TS 36.213 [23, table 7.2.1-1E].The leftmost bit, bit 0 in the bit string corresponds to the cell with ServCellIndex=0 and bit 1 in the bit string corresponds to the cell with *ServCellIndex* =1 etc. Each bit has either value 0 (means that aperiodic CSI report is triggered for CSI subframe set 1) or value 1 (means that aperiodic CSI report is triggered for CSI subframe set 2).

DAINGEAN_0002111

Conditional presence	Explanation
cqi-Setup	This field is not present for an Scell except for the PSCell, while it is conditionally present for the PCell and the PSCell according to the following. The field is optional present, need OR, if the *cqi-ReportPeriodic* in the *cqi-ReportConfig* is set to *setup*. If the field *cqi-ReportPeriodic* is present and set to *release*, the field is not present and the UE shall delete any existing value for this field. Otherwise the field is not present.
PMIRI	The field is optional present, need OR, if *cqi-ReportPeriodic* is included and set to *setup*, or *cqi-ReportModeAperiodic* is included. If the field *cqi-ReportPeriodic* is present and set to *release* and *cqi-ReportModeAperiodic* is absent, the field is not present and the UE shall delete any existing value for this field. Otherwise the field is not present.
PMIRIPCell	The field is optional present, need OR, if *cqi-ReportPeriodic* is included in the *CQI-ReportConfig-r10* and set to *setup*, or *cqi-ReportAperiodic* is included in the *CQI-ReportConfig-r10* and set to *setup*. If the field *cqi-ReportPeriodic* is present in the *CQI-ReportConfig-r10* and set to *release* and *cqi-ReportAperiodic* is included in the *CQI-ReportConfig-r10* and set to *release*, the field is not present and the UE shall delete any existing value for this field. Otherwise the field is not present.
PMIRISCell	The field is optional present, need OR, if *cqi-ReportPeriodicSCell* is included and set to *setup*, or *cqi-ReportModeAperiodic-r10* is included in the *CQI-ReportConfigSCell*. If the field *cqi-ReportPeriodicSCell* is present and set to *release* and *cqi-ReportModeAperiodic-r10* is absent in the *CQI-ReportConfigSCell*, the field is not present and the UE shall delete any existing value for this field. Otherwise the field is not present.

– *CQI-ReportPeriodicProcExtId*

The IE *CQI-ReportPeriodicProcExtId* is used to identify a periodic CQI reporting configuration that E-UTRAN may configure in addition to the configuration specified by the IE *CQI-ReportPeriodic-r10*. These additional configurations are specified by the IE *CQI-ReportPeriodicProcExt-r11*. The identity is unique within the scope of a carrier frequency.

CQI-ReportPeriodicProcExtId information elements

```
-- ASN1START

CQI-ReportPeriodicProcExtId-r11 ::=                INTEGER (1..maxCQI-ProcExt-r11)

-- ASN1STOP
```

– *CrossCarrierSchedulingConfig*

The IE *CrossCarrierSchedulingConfig* is used to specify the configuration when the cross carrier scheduling is used in a cell.

CrossCarrierSchedulingConfig information elements

```
-- ASN1START

CrossCarrierSchedulingConfig-r10 ::=        SEQUENCE {
    schedulingCellInfo-r10              CHOICE {
        own-r10                             SEQUENCE {                  -- No cross carrier
scheduling
            cif-Presence-r10                        BOOLEAN
        },
        other-r10                               SEQUENCE {                  -- Cross carrier
scheduling
            schedulingCellId-r10                ServCellIndex-r10,
            pdsch-Start-r10                     INTEGER (1..4)
        }
    }
}

CrossCarrierSchedulingConfig-r13 ::=        SEQUENCE {
    schedulingCellInfo-r13              CHOICE {
        own-r13                             SEQUENCE {                  -- No cross carrier
scheduling
            cif-Presence-r13                        BOOLEAN
        },
        other-r13                               SEQUENCE {                  -- Cross carrier scheduling
            schedulingCellId-r13                ServCellIndex-r13,
            pdsch-Start-r13                     INTEGER (1..4),
```


DAINGEAN_0002112

```
            cif-InSchedulingCell-r13                INTEGER (1..7)
        }
    }
}

-- ASN1STOP
```

***CrossCarrierSchedulingConfig* field descriptions**
cif-Presence
The field is used to indicate whether carrier indicator field is present (value TRUE) or not (value FALSE) in PDCCH/ EPDCCH DCI formats, see TS 36.212 [22, 5.3.3.1].
cif-InSchedulingCell
The field indicates the CIF value used in the scheduling cell to indicate this cell, see TS 36.212 [22, 5.3.3.1]. In case of carrier indicator field is present, the CIF value is 0.
pdsch-Start
The starting OFDM symbol of PDSCH for the concerned SCell, see TS 36.213 [23. 7.1.6.4]. Values 1, 2, 3 are applicable when *dl-Bandwidth* for the concerned SCell is greater than 10 resource blocks, values 2, 3, 4 are applicable when *dl-Bandwidth* for the concerned SCell is less than or equal to 10 resource blocks, see TS 36.211 [21, Table 6,7-1].
schedulingCellId
Indicates which cell signals the downlink allocations and uplink grants, if applicable, for the concerned SCell. In case the UE is configured with DC, the scheduling cell is part of the same cell group (i.e. MCG or SCG) as the scheduled cell.

– *CSI-IM-Config*

The IE *CSI-IM-Config* is the CSI Interference Measurement (IM) configuration that E-UTRAN may configure on a serving frequency, see TS 36.213 [23, 7.2.6].

***CSI-IM-Config* information elements**

```
-- ASN1START

CSI-IM-Config-r11 ::=       SEQUENCE {
    csi-IM-ConfigId-r11         CSI-IM-ConfigId-r11,
    resourceConfig-r11          INTEGER (0..31),
    subframeConfig-r11          INTEGER (0..154),
    ...,
    [[  interferenceMeasRestriction-r13     BOOLEAN     OPTIONAL    -- Need ON
    ]]
}

CSI-IM-ConfigExt-r12 ::=        SEQUENCE {
    csi-IM-ConfigId-v1250           CSI-IM-ConfigId-v1250,
    resourceConfig-r12          INTEGER (0..31),
    subframeConfig-r12          INTEGER (0..154),
    ...,
    [[  interferenceMeasRestriction-r13 BOOLEAN             OPTIONAL,   -- Need ON
        csi-IM-ConfigId-v1310       CSI-IM-ConfigId-v1310   OPTIONAL    -- Need ON
    ]]
}

-- ASN1STOP
```

***CSI-IM-Config* field descriptions**
resourceConfig
Parameter: CSI reference signal configuration, see TS 36.213 [23, 7.2.6] and TS 36.211 [21, table 6.10.5.2-1 and 6.10.5.2-2] for 4 REs.
subframeConfig
Parameter: I_{CSI-RS}, see TS 36.213 [23, 7.2.6] and TS 36.211 [21, table 6.10.5.3-1].

– *CSI-IM-ConfigId*

The IE *CSI-IM-ConfigId* is used to identify a CSI-IM configuration that is configured by the IE *CSI-IM-Config*. The identity is unique within the scope of a carrier frequency.

DAINGEAN_0002113

***CSI-IM-ConfigId* information elements**

```
-- ASN1START

CSI-IM-ConfigId-r11 ::=                 INTEGER (1..maxCSI-IM-r11)
CSI-IM-ConfigId-r12 ::=                 INTEGER (1..maxCSI-IM-r12)
CSI-IM-ConfigId-v1250 ::=               INTEGER (maxCSI-IM-r12)
CSI-IM-ConfigId-v1310 ::=               INTEGER (minCSI-IM-r13..maxCSI-IM-r13)
CSI-IM-ConfigId-r13 ::=                 INTEGER (1..maxCSI-IM-r13)

-- ASN1STOP
```

– *CSI-Process*

The IE *CSI-Process* is the CSI process configuration that E-UTRAN may configure on a serving frequency.

***CSI-Process* information elements**

```
-- ASN1START

CSI-Process-r11 ::=     SEQUENCE {
    csi-ProcessId-r11           CSI-ProcessId-r11,
    csi-RS-ConfigNZPId-r11      CSI-RS-ConfigNZPId-r11,
    csi-IM-ConfigId-r11         CSI-IM-ConfigId-r11,
    p-C-AndCBSRList-r11         P-C-AndCBSR-Pair-r13a,
    cqi-ReportBothProc-r11      CQI-ReportBothProc-r11                  OPTIONAL,       -- Need OR
    cqi-ReportPeriodicProcId-r11    INTEGER (0..maxCQI-ProcExt-r11)     OPTIONAL,       -- Need OR
    cqi-ReportAperiodicProc-r11 CQI-ReportAperiodicProc-r11             OPTIONAL,       -- Need OR
    ...,
    [[  alternativeCodebookEnabledFor4TXProc-r12    ENUMERATED {true}   OPTIONAL,   -- Need ON
        csi-IM-ConfigIdList-r12     CHOICE {
            release                     NULL,
            setup                       SEQUENCE (SIZE (1..2)) OF CSI-IM-ConfigId-r12
        }                                                               OPTIONAL,   -- Need ON
        cqi-ReportAperiodicProc2-r12    CHOICE {
            release                     NULL,
            setup                       CQI-ReportAperiodicProc-r11
        }                                                               OPTIONAL    -- Need ON
    ]],
    [[  cqi-ReportAperiodicProc-v1310   CHOICE {
            release                         NULL,
            setup                           CQI-ReportAperiodicProc-v1310
        }                                                               OPTIONAL,       -- Need ON
        cqi-ReportAperiodicProc2-v1310  CHOICE {
            release                         NULL,
            setup                           CQI-ReportAperiodicProc-v1310
        }                                                               OPTIONAL,       -- Need ON
        eMIMO-Type-r13                  CSI-RS-ConfigEMIMO-r13          OPTIONAL        -- Need ON
    ]]
}

-- ASN1STOP
```


DAINGEAN_0002114

***CSI-Process* field descriptions**
alternativeCodebookEnabledFor4TXProc Indicates whether code book in TS 36.213 [23] Table 7.2.4-0A to Table 7.2.4-0D is being used for deriving CSI feedback and reporting for a CSI process. EUTRAN may configure the field only if the number of CSI-RS ports for non-zero power transmission CSI-RS configuration is 4.
cqi-ReportAperiodicProc If *csi-MeasSubframeSets-r12* is configured for the same frequency as the CSI process, *cqi-ReportAperiodicProc* applies for CSI subframe set 1. If *csi-MeasSubframeSet1-r10* or *csi-MeasSubframeSet2-r10* are configured for the same frequency as the CSI process, *cqi-ReportAperiodicProc* applies for CSI subframe set 1 or CSI subframe set 2. Otherwise, *cqi-ReportAperiodicProc* applies for all subframes. E-UTRAN configures *cqi-ReportAperiodicProc-v1310* only if *cqi-ReportAperiodicProc-r11* is configured
cqi-ReportAperiodicProc2 *cqi-ReportAperiodicProc2* is configured only if *csi-MeasSubframeSets-r12* is configured for the same frequency as the CSI process. *cqi-ReportAperiodicProc2* is for CSI subframe set 2. E-UTRAN shall set *cqi-ReportModeAperiodic-r11* in *cqi-ReportAperiodicProc2* the same as in *cqi-ReportAperiodicProc*. E-UTRAN configures *cqi-ReportAperiodicProc2-v1310* only if *cqi-ReportAperiodicProc2-r12* is configured.
cqi-ReportBothProc Includes CQI configuration parameters applicable for both aperiodic and periodic CSI reporting, for which CSI process specific values may be configured. E-UTRAN configures the field if and only if *cqi-ReportPeriodicProcId* is included and/ or if *cqi-ReportAperiodicProc* is included.
cqi-ReportPeriodicProcId Refers to a periodic CQI reporting configuration that is configured for the same frequency as the CSI process. Value 0 refers to the set of parameters defined by the REL-10 CQI reporting configuration fields, while the other values refer to the additional configurations E-UTRAN assigns by *CQI-ReportPeriodicProcExt-r11* (and as covered by *CQI-ReportPeriodicProcExtId*).
csi-IM-ConfigId Refers to a CSI-IM configuration that is configured for the same frequency as the CSI process.
csi-IM-ConfigIdList Refers to one or two CSI-IM configurations that are configured for the same frequency as the CSI process. *csi-IM-ConfigIdList* can include 2 entries only if *csi-MeasSubframeSets-r12* is configured for the same frequency as the CSI process. UE shall ignore *csi-IM-ConfigId-r11* if *csi-IM-ConfigIdList-r12* is configured.
csi-RS-ConfigNZPId Refers to a CSI RS configuration using non-zero power transmission that is configured for the same frequency as the CSI process.
eMIMO-Type Parameter: *eMIMO-Type*, see TS 36.213 [23], TS 36.211 [21]. If *eMIMO-Type* is set to *nonPrecoded*, the codebooks used for deriving CSI feedback are in TS 36.213 [23, Table 7.2.4-10 to Table 7.2.4-17]. Choice values *nonPrecoded* and *beamformed* correspond to '*CLASS A*' and '*CLASS B*' respectively, see TS 36.212 [22] and TS 36.213 [23].
p-C-AndCBSRList The UE shall ignore *p-C-AndCBSRList-r11* if configured with *eMIMO-Type* unless it is set to *beamformed*, *alternativeCodebookEnabledBeamformed* is set to *FALSE* and *csi-RS-ConfigNZPIdListExt* is not configured.

– *CSI-ProcessId*

The IE *CSI-ProcessId* is used to identify a CSI process that is configured by the IE *CSI-Process*. The identity is unique within the scope of a carrier frequency.

***CSI-ProcessId* information elements**

```
-- ASN1START

CSI-ProcessId-r11 ::=       INTEGER (1..maxCSI-Proc-r11)

-- ASN1STOP
```

– *CSI-RS-Config*

The IE *CSI-RS-Config* is used to specify the CSI (Channel-State Information) reference signal configuration.

***CSI-RS-Config* information elements**

```
-- ASN1START

CSI-RS-Config-r10 ::=       SEQUENCE {
    csi-RS-r10                  CHOICE {
```


DAINGEAN_0002115

```
        release                     NULL,
        setup                       SEQUENCE {
            antennaPortsCount-r10           ENUMERATED {an1, an2, an4, an8},
            resourceConfig-r10              INTEGER (0..31),
            subframeConfig-r10              INTEGER (0..154),
            p-C-r10                         INTEGER (-8..15)
        }
    }                                                               OPTIONAL,           -- Need ON
    zeroTxPowerCSI-RS-r10       ZeroTxPowerCSI-RS-Conf-r12          OPTIONAL            -- Need ON
}

CSI-RS-Config-v1250 ::=     SEQUENCE {
    zeroTxPowerCSI-RS2-r12      ZeroTxPowerCSI-RS-Conf-r12          OPTIONAL,           -- Need ON
    ds-ZeroTxPowerCSI-RS-r12        CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            zeroTxPowerCSI-RS-List-r12      SEQUENCE (SIZE (1..maxDS-ZTP-CSI-RS-r12)) OF
ZeroTxPowerCSI-RS-r12
        }
    }                                                               OPTIONAL                -- Need
ON
}

CSI-RS-Config-v1310 ::=     SEQUENCE {
    eMIMO-Type-r13              CSI-RS-ConfigEMIMO-r13          OPTIONAL    -- Need ON
}

ZeroTxPowerCSI-RS-Conf-r12 ::=  CHOICE {
        release                         NULL,
        setup                           ZeroTxPowerCSI-RS-r12
}

ZeroTxPowerCSI-RS-r12 ::=   SEQUENCE {
    zeroTxPowerResourceConfigList-r12       BIT STRING (SIZE (16)),
    zeroTxPowerSubframeConfig-r12           INTEGER (0..154)
}

-- ASN1STOP
```

***CSI-RS-Config* field descriptions**
ace-For4Tx-PerResourceConfigList The field indicates the *alternativeCodeBookEnabledFor4TX-r12* per CSI-RS resource. E-UTRAN configures the field only if *csi-RS-ConfigNZPIdListExt* is configured.
antennaPortsCount Parameter represents the number of antenna ports used for transmission of CSI reference signals where value an1 corresponds to 1 antenna port, an2 to 2 antenna ports and so on, see TS 36.211 [21, 6.10.5].
ds-ZeroTxPowerCSI-RS Parameter for additional *zeroTxPowerCSI-RS* for a serving cell, concerning the CSI-RS included in discovery signals.
p-C Parameter: P_c, see TS 36.213 [23, 7.2.5]. The UE shall ignore *p-C-r10* if configured with *eMIMO-Type* unless it is set to *beamformed*, *alternativeCodebookEnabledBeamformed* is set to *FALSE* and *csi-RS-ConfigNZPIdListExt* is not configured.
resourceConfig Parameter: CSI reference signal configuration, see TS 36.211 [21, table 6.10.5.2-1 and 6.10.5.2-2].
subframeConfig Parameter: $I_{\text{CSI-RS}}$, see TS 36.211 [21, table 6.10.5.3-1].
zeroTxPowerCSI-RS2 Parameter for additional *zeroTxPowerCSI-RS* for a serving cell. E-UTRAN configures the field only if *csi-MeasSubframeSets-r12* and *TM 1 – 9* are configured for the serving cell.
zeroTxPowerResourceConfigList Parameter: *ZeroPowerCSI-RS*, see TS 36.213 [23, 7.2.7].
zeroTxPowerSubframeConfig Parameter: $I_{\text{CSI-RS}}$, see TS 36.211 [21, table 6.10.5.3-1].

– *CSI-RS-ConfigEMIMO*

The IE *CSI-RS-ConfigEMIMO* is used to specify the CSI (Channel-State Information) reference signal configuration for EBF FD- MIMO.

DAINGEAN_0002116

CSI-RS-ConfigEMIMO information elements

```
-- ASN1START

CSI-RS-ConfigEMIMO-r13 ::=  CHOICE {
    release                     NULL,
    setup                       CHOICE {
        nonPrecoded-r13             CSI-RS-ConfigNonPrecoded-r13,
        beamformed-r13              CSI-RS-ConfigBeamformed-r13
    }
}

CSI-RS-ConfigNonPrecoded-r13 ::=            SEQUENCE {
    p-C-AndCBSRList-r13                     P-C-AndCBSR-Pair-r13            OPTIONAL,   -- Need OR
    codebookConfigN1-r13                    ENUMERATED {n1, n2, n3, n4, n8},
    codebookConfigN2-r13                    ENUMERATED {n1, n2, n3, n4, n8},
    codebookOverSamplingRateConfig-O1-r13   ENUMERATED {n4, n8}             OPTIONAL,   -- Need OR
    codebookOverSamplingRateConfig-O2-r13   ENUMERATED {n4,n8}              OPTIONAL,   -- Need OR
    codebookConfig-r13                      INTEGER (1..4),
    csi-IM-ConfigIdList-r13                 SEQUENCE (SIZE (1..2)) OF CSI-IM-ConfigId-r13
    OPTIONAL,   -- Need OR
    csi-RS-ConfigNZP-EMIMO-r13              CSI-RS-ConfigNZP-EMIMO-r13      OPTIONAL    -- Need ON
}

CSI-RS-ConfigBeamformed-r13 ::=         SEQUENCE    {
    csi-RS-ConfigNZPIdListExt-r13           SEQUENCE (SIZE (1..7)) OF CSI-RS-ConfigNZPId-r13
    OPTIONAL,   -- Need OR
    csi-IM-ConfigIdList-r13                 SEQUENCE (SIZE (1..8)) OF CSI-IM-ConfigId-r13
    OPTIONAL,   -- Need OR
    p-C-AndCBSR-PerResourceConfigList-r13   SEQUENCE (SIZE (1..8)) OF P-C-AndCBSR-Pair-r13
    OPTIONAL,   -- Need OR
    ace-For4Tx-PerResourceConfigList-r13    SEQUENCE (SIZE (1..7)) OF BOOLEAN   OPTIONAL,   -- Need
OR
    alternativeCodebookEnabledBeamformed-r13    ENUMERATED {true}   OPTIONAL,   -- Need OR
    channelMeasRestriction-r13              ENUMERATED {on}         OPTIONAL    -- Need OR
}

-- ASN1STOP
```

***CSI-RS-ConfigEMIMO* field descriptions**
alternativeCodebookEnabledBeamformed The field indicates whether code book in TS 36.213 [23, Tab 7.2.4-18 to Tab 7.2.4-20] is being used for deriving CSI feedback and reporting for a CSI process. E-UTRAN configures the field only for a process referring to a single RS configuration using non-zero power transmission (i.e a process for which *csi-RS-ConfigNZPIdListExt* is not configured). Field *alternativeCodebookEnabledBeamformed* corresponds to parameter alternativeCodebookEnabledCLASSB_K1 in TS 36.212 [22] and TS 36.213 [23].
codebookConfig Indicates a sub-set of the codebook entry, see TS 36.213 [23].
codebookConfigNx Indicates the number of antenna ports per polarization in dimension x as used for transmission of CSI reference signals. Value n1 corresponds to 1, n2 to 2 and so on, see TS 36.213 [23].
codebookOverSamplingRateConfig-Ox Indicates the spatial over-sampling rate in dimension x as used for transmission of CSI reference signals. Value n1 corresponds to 1, n2 to 2 and so on, see TS 36.213 [23].
csi-IM-ConfigId(List) E-UTRAN configures the field *csi-IM-ConfigIdList* only if the IE is included in CSI-Process is configured (i.e. when TM10 is configured for the serving cell).
CSI-RS-ConfigBeamformed If *csi-RS-ConfigNZPIdListExt-r13* is configured, E-UTRAN configures the same total number of entries for NZP, *csi-IM-ConfigIdList-r13* and *p-C-AndCBSR-PerResourceConfigList-r13*.
p-C-AndCBSR-PerResourceConfigList E-UTRAN does not configure the field *p-C-AndCBSR-PerResourceConfigList* if the UE is configured with *eMIMO-Type* set to *beamformed*, *alternativeCodebookEnabledBeamformed* is set to *FALSE* and *csi-RS-ConfigNZPIdListExt* is not configured.

– *CSI-RS-ConfigNZP*

The IE *CSI-RS-ConfigNZP* is the CSI-RS resource configuration using non-zero power transmission that E-UTRAN may configure on a serving frequency.

DAINGEAN_0002117

CSI-RS-ConfigNZP information elements

```
-- ASN1START

CSI-RS-ConfigNZP-r11 ::=          SEQUENCE {
    csi-RS-ConfigNZPId-r11            CSI-RS-ConfigNZPId-r11,
    antennaPortsCount-r11             ENUMERATED {an1, an2, an4, an8},
    resourceConfig-r11                INTEGER (0..31),
    subframeConfig-r11                INTEGER (0..154),
    scramblingIdentity-r11            INTEGER (0..503),
    qcl-CRS-Info-r11                  SEQUENCE {
        qcl-ScramblingIdentity-r11        INTEGER (0..503),
        crs-PortsCount-r11                ENUMERATED {n1, n2, n4, spare1},
        mbsfn-SubframeConfigList-r11      CHOICE {
                release                       NULL,
                setup                         SEQUENCE {
                    subframeConfigList            MBSFN-SubframeConfigList
                }
        }                                                                   OPTIONAL    -- Need ON
    }                                                                       OPTIONAL,   -- Need OR
    ...,
    [[  csi-RS-ConfigNZPId-v1310          CSI-RS-ConfigNZPId-v1310          OPTIONAL    -- Need ON
    ]]
}

CSI-RS-ConfigNZP-EMIMO-r13 ::=  CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        nzp-resourceConfigList-r13      SEQUENCE (SIZE (1..2)) OF NZP-ResourceConfig-r13,
        cdmType-r13                     ENUMERATED {cdm2, cdm4} OPTIONAL    -- Need OR
        }
}

NZP-ResourceConfig-r13 ::=  SEQUENCE {
    resourceConfig-r13              ResourceConfig-r13,
    ...
}

ResourceConfig-r13 ::=              INTEGER (0..31)

-- ASN1STOP
```

***CSI-RS-ConfigNZP* field descriptions**
antennaPortsCount   Parameter represents the number of antenna ports used for transmission of CSI reference signals where an1 corresponds to 1, an2 to 2 antenna ports etc. see TS 36.211 [21, 6.10.5].
eMIMO-Info   Parameter: *CDMType*, see TS 36.211 [21, 6.10.5.2]. EUTRAN configures this field only for CSI processes that include *eMIMO-Type* set to *nonPrecoded*.
nzp-resourceConfigList   Indicate a list of non-zero power transmission CSI-RS resources using parameter *resourceConfig*.
qcl-CRS-Info   Indicates CRS antenna ports that is quasi co-located with the CSI-RS antenna ports, see TS 36.213 [23, 7.2.5]. EUTRAN configures this field if and only if the UE is configured with *qcl-Operation* set to *typeB*.
resourceConfig   Parameter: CSI reference signal configuration, see TS 36.211 [21, table 6.10.5.2-1 and 6.10.5.2-2]. *resourceConfig-r11* should be ignored if *eMIMO-Info-r13* is configured.
subframeConfig   Parameter: $I_{\text{CSI-RS}}$, see TS 36.211 [21, table 6.10.5.3-1].
scramblingIdentity   Parameter: Pseudo-random sequence generator parameter, n_{ID}, see TS 36.213 [23, 7.2.5].

– *CSI-RS-ConfigNZPId*

The IE *CSI-RS-ConfigNZPId* is used to identify a CSI-RS resource configuration using non-zero transmission power, as configured by the IE *CSI-RS-ConfigNZP*. The identity is unique within the scope of a carrier frequency.

DAINGEAN_0002118

CSI-RS-ConfigNZPId information elements

```
-- ASN1START

CSI-RS-ConfigNZPId-r11 ::=                  INTEGER (1..maxCSI-RS-NZP-r11)
CSI-RS-ConfigNZPId-v1310 ::=                INTEGER (minCSI-RS-NZP-r13..maxCSI-RS-NZP-r13)
CSI-RS-ConfigNZPId-r13 ::=                  INTEGER (1..maxCSI-RS-NZP-r13)

-- ASN1STOP
```

– *CSI-RS-ConfigZP*

The IE *CSI-RS-ConfigZP* is the CSI-RS resource configuration, for which UE assumes zero transmission power, that E-UTRAN may configure on a serving frequency.

CSI-RS-ConfigZP information elements

```
-- ASN1START

CSI-RS-ConfigZP-r11 ::=     SEQUENCE {
    csi-RS-ConfigZPId-r11       CSI-RS-ConfigZPId-r11,
    resourceConfigList-r11      BIT STRING (SIZE (16)),
    subframeConfig-r11          INTEGER (0..154),
    ...
}

-- ASN1STOP
```

CSI-RS-ConfigZP field descriptions

resourceConfigList
Parameter: *ZeroPowerCSI-RS*, see TS 36.213 [23, 7.2.7].

subframeConfig
Parameter: $I_{\text{CSI-RS}}$, see TS 36.211 [21, table 6.10.5.3-1].

– *CSI-RS-ConfigZPId*

The IE *CSI-RS-ConfigZPId* is used to identify a CSI-RS resource configuration for which UE assumes zero transmission power, as configured by the IE *CSI-RS-ConfigZP*. The identity is unique within the scope of a carrier frequency.

CSI-RS-ConfigZPId information elements

```
-- ASN1START

CSI-RS-ConfigZPId-r11 ::=                   INTEGER (1..maxCSI-RS-ZP-r11)

-- ASN1STOP
```

– *DMRS-Config*

The IE *DMRS-Config* is the DMRS configuration that E-UTRAN may configure on a serving frequency.

DMRS-Config information elements

```
-- ASN1START

DMRS-Config-r11 ::=     CHOICE {
    release                     NULL,
    setup                       SEQUENCE {
        scramblingIdentity-r11      INTEGER (0..503),
        scramblingIdentity2-r11     INTEGER (0..503)
    }
}
DMRS-Config-v1310 ::=           SEQUENCE {
        dmrs-tableAlt-r13               ENUMERATED {true}           OPTIONAL    -- Need OR
```


DAINGEAN_0002119

```
}

-- ASN1STOP
```

***DMRS-Config* field descriptions**
scramblingIdentity, scramblingIdentity2
Parameter: $n_{\mathrm{ID}}^{\mathrm{DMRS},i}$, see TS 36.211 [21, 6.10.3.1].
dmrs-tableAlt
The field indicates whether to use an alternative table for DMRS upon PDSCH transmission, see TS 36.213 [23].

– *DRB-Identity*

The IE *DRB-Identity* is used to identify a DRB used by a UE.

***DRB-Identity* information elements**

```
-- ASN1START

DRB-Identity ::=                    INTEGER (1..32)

-- ASN1STOP
```

– *EPDCCH-Config*

The IE EPDCCH-Config specifies the subframes and resource blocks for EPDCCH monitoring that E-UTRAN may configure for a serving cell.

***EPDCCH-Config* information element**

```
-- ASN1START

EPDCCH-Config-r11 ::=       SEQUENCE{
    config-r11      CHOICE {
        release                     NULL,
        setup                       SEQUENCE {
            subframePatternConfig-r11   CHOICE {
                release                     NULL,
                setup                       SEQUENCE {
                    subframePattern-r11         MeasSubframePattern-r10
                }
            }                                                           OPTIONAL, -- Need ON
            startSymbol-r11             INTEGER (1..4)                  OPTIONAL, -- Need OP
            setConfigToReleaseList-r11  EPDCCH-SetConfigToReleaseList-r11   OPTIONAL, -- Need ON
            setConfigToAddModList-r11   EPDCCH-SetConfigToAddModList-r11    OPTIONAL -- Need ON
        }
    }
}

EPDCCH-SetConfigToAddModList-r11 ::=    SEQUENCE (SIZE(1..maxEPDCCH-Set-r11)) OF EPDCCH-SetConfig-
r11

EPDCCH-SetConfigToReleaseList-r11 ::=   SEQUENCE (SIZE(1..maxEPDCCH-Set-r11)) OF EPDCCH-SetConfigId-
r11

EPDCCH-SetConfig-r11 ::=        SEQUENCE {
    setConfigId-r11                 EPDCCH-SetConfigId-r11,
    transmissionType-r11            ENUMERATED {localised, distributed},
    resourceBlockAssignment-r11     SEQUENCE{
        numberPRB-Pairs-r11             ENUMERATED {n2, n4, n8},
        resourceBlockAssignment-r11     BIT STRING (SIZE(4..38))
    },
    dmrs-ScramblingSequenceInt-r11  INTEGER (0..503),
    pucch-ResourceStartOffset-r11   INTEGER (0..2047),
    re-MappingQCL-ConfigId-r11      PDSCH-RE-MappingQCL-ConfigId-r11    OPTIONAL, -- Need OR
    ...,
    [[  csi-RS-ConfigZPId2-r12              CHOICE {
            release                     NULL,
            setup                       CSI-RS-ConfigZPId-r11
```


DAINGEAN_0002120

```
        }                                                       OPTIONAL    -- Need ON
    ]],
    [[  numberPRB-Pairs-v1310           CHOICE {
            release                         NULL,
            setup                           ENUMERATED {n6}
        }                                                       OPTIONAL,   -- Need ON
        mpdcch-config-r13               CHOICE {
            release                         NULL,
            setup                           SEQUENCE {
                csi-NumRepetitionCE-r13         ENUMERATED {sf1, sf2, sf4, sf8, sf16, sf32},
                mpdcch-pdsch-HoppingConfig-r13  ENUMERATED {on,off},
                mpdcch-StartSF-UESS-r13         CHOICE {
                    fdd-r13                         ENUMERATED {v1, v1dot5, v2, v2dot5, v4,
                                                                v5, v8, v10},
                tdd-r13                         ENUMERATED {v1, v2, v4, v5, v8, v10,
                                                            v20, spare1}
                },
                mpdcch-NumRepetition-r13        ENUMERATED {r1, r2, r4, r8, r16,
                                                            r32, r64, r128, r256},
                mpdcch-Narrowband-r13           INTEGER (1.. maxAvailNarrowBands-r13)
            }
        }                                                       OPTIONAL    -- Need ON
    ]]
}

EPDCCH-SetConfigId-r11 ::=  INTEGER (0..1)

-- ASN1STOP
```


DAINGEAN_0002121

***EPDCCH-Config* field descriptions**
csi-NumRepetitionCE Number of subframes for CSI reference resource, see TS 36.213 [23]. Value sf1 corresponds to 1 subframe, sf2 corresponds to 2 subframes and so on.
csi-RS-ConfigZPId2 Indicates the rate matching parameters in addition to those indicated by *re-MappingQCL-ConfigId*. E-UTRAN configures this field only when tm10 is configured.
dmrs-ScramblingSequenceInt The DMRS scrambling sequence initialization parameter $n_{\mathrm{ID},i}^{\mathrm{EPDCCH}}$ defined in TS 36.211 [21, 6.10.3A.1].
EPDCCH-SetConfig Provides EPDCCH configuration set. See TS 36.213 [23, 9.1.4]. E-UTRAN configures at least one *EPDCCH-SetConfig when EPDCCH-Config* is configured. For BL UEs or UEs in CE, EUTRAN does not configure more than one EPDCCH-SetConfig.
mpdcch-Narrowband Narrowband for UE-SS for MPDCCH, see TS 36.211 [21].
mpdcch-NumRepetition Maximum numbers of repetitions for UE-SS for MPDCCH, see TS 36.211 [21].
mpdcch-pdsch-HoppingConfig Frequency hopping activation/deactivation for unicast MPDCCH/PDSCH, see TS 36.211 [21]
mpdcch-StartSF-UESS Starting subframe configuration for an MPDCCH UE-specific search space, see TS 36.211 [21]. Value v1 corresponds to 1, value v1dot5 corresponds to 1.5, and so on.
numberPRB-Pairs Indicates the number of physical resource-block pairs used for the EPDCCH set. Value n2 corresponds to 2 physical resource-block pairs; n4 corresponds to 4 physical resource-block pairs and so on. Value n8 is not supported if *dl-Bandwidth* is set to 6 resource blocks. EUTRAN configures value up to n6 only for BL UEs or UEs in CE. Value n6 is only applicable to BL UEs or UEs in CE .
pucch-ResourceStartOffset PUCCH format 1a, 1b and 3 resource starting offset for the EPDCCH set. See TS 36.213 [23, 10.1].
re-MappingQCL-ConfigId Indicates the starting OFDM symbol, the related rate matching parameters and quasi co-location assumption for EPDCCH when the UE is configured with tm10. This field provides the identity of a configured *PDSCH-RE-MappingQCL-Config*. E-UTRAN configures this field only when tm10 is configured.
resourceBlockAssignment Indicates the index to a specific combination of physical resource-block pair for EPDCCH set. See TS 36.213 [23, 9.1.4.4]. The size of *resourceBlockAssignment* is specified in TS 36.213 [23, 9.1.4.4] and based on *numberPRB-Pairs* and the signalled value of *dl-Bandwidth*. If *numberPRB-Pairs-v1310* field is present, the total number of physical resource-block pairs is 6 and it is composed of one subset of 2 physical resource-block pairs and another subset of 4 physical resource-block pairs, and the *resourceBlockAssignment* field defines the subset of 2 physical resource-block pairs.
setConfigId Indicates the identity of the EPDCCH configuration set.
startSymbol Indicates the OFDM starting symbol for any EPDCCH and PDSCH scheduled by EPDCCH on the same cell, see TS 36.213 [23, 9.1.4.1]. If not present, the UE shall release the configuration and shall derive the starting OFDM symbol of EPDCCH and PDSCH scheduled by EPDCCH from PCFICH. Values 1, 2, and 3 are applicable for *dl-Bandwidth* greater than 10 resource blocks. Values 2, 3, and 4 are applicable otherwise. E-UTRAN does not configure the field for UEs configured with tm10.
subframePatternConfig Configures the subframes which the UE shall monitor the UE-specific search space on EPDCCH, except for pre-defined rules in TS 36.213 [23, 9.1.4]. If the field is not configured when EPDCCH is configured, the UE shall monitor the UE-specific search space on EPDCCH in all subframes except for pre-defined rules in TS 36.213 [23, 9.1.4].
transmissionType Indicates whether distributed or localized EPDCCH transmission mode is used as defined in TS 36.211 [21, 6.8A.1].

– *EIMTA-MainConfig*

The IE *EIMTA-MainConfig* is used to specify the eIMTA-RNTI used for eIMTA and the subframes used for monitoring PDCCH with eIMTA-RNTI. The IE *EIMTA-MainConfigServCell* is used to specify the eIMTA related parameters applicable for the concerned serving cell.

***EIMTA-MainConfig* information element**

```
-- ASN1START
```


DAINGEAN_0002122

```
EIMTA-MainConfig-r12 ::=    CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        eimta-RNTI-r12              C-RNTI,
        eimta-CommandPeriodicity-r12    ENUMERATED {sf10, sf20, sf40, sf80},
        eimta-CommandSubframeSet-r12    BIT STRING (SIZE(10))
    }
}

EIMTA-MainConfigServCell-r12 ::=    CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        eimta-UL-DL-ConfigIndex-r12             INTEGER (1..5),
        eimta-HARQ-ReferenceConfig-r12      ENUMERATED {sa2,sa4,sa5},
        mbsfn-SubframeConfigList-v1250      CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                subframeConfigList-r12              MBSFN-SubframeConfigList
                }
        }
    }
}

-- ASN1STOP
```

***EIMTA-MainConfig* field descriptions**
eimta-CommandPeriodicity
Configures the periodicity to monitor PDCCH with eIMTA-RNTI, see TS 36.213 [23, 13.1]. Value sf10 corresponds to 10 subframes, sf20 corresponds to 20 subframes and so on.
eimta-CommandSubframeSet
Configures the subframe(s) to monitor PDCCH with eIMTA-RNTI within the periodicity configured by *eimta-CommandPeriodicity*. The 10 bits correspond to all subframes in the last radio frame within each periodicity. The left most bit is for subframe 0 and so on. Each bit can be of value 0 or 1. The value of 1 means that the corresponding subframe is configured for monitoring PDCCH with eIMTA-RNTI, and the value of 0 means otherwise. In case of TDD as PCell, only the downlink subframes indicated by the UL/ DL configuration in SIB1 can be configured for monitoring PDCCH with eIMTA-RNTI. In case of FDD as PCell, any of the ten subframes can be configured for monitoring PDCCH with eIMTA-RNTI.
eimta-HARQ-ReferenceConfig
Indicates UL/ DL configuration used as the DL HARQ reference configuration for this serving cell. Value sa2 corresponds to Configuration2, sa4 to Configuration4 etc, as specified in TS 36.211 [21, table 4.2-2]. E-UTRAN configures the same value for all serving cells residing on same frequency band.
eimta-UL-DL-ConfigIndex
Index of *I*, see TS 36.212 [22, 5.3.3.1.4]. E-UTRAN configures the same value for all serving cells residing on same frequency band.
mbsfn-SubframeConfigList
Configure the MBSFN subframes for the UE on this serving cell. An uplink subframe indicated by the DL/UL subframe configuration in SIB1 can be configured as MBSFN subframe.

– *LogicalChannelConfig*

The IE *LogicalChannelConfig* is used to configure the logical channel parameters.

***LogicalChannelConfig* information element**

```
-- ASN1START

LogicalChannelConfig ::=            SEQUENCE {
    ul-SpecificParameters               SEQUENCE {
        priority                            INTEGER (1..16),
        prioritisedBitRate                  ENUMERATED {
                                                kBps0, kBps8, kBps16, kBps32, kBps64, kBps128,
                                                kBps256, infinity, kBps512-v1020, kBps1024-v1020,
                                                kBps2048-v1020, spare5, spare4, spare3, spare2,
                                                spare1},
        bucketSizeDuration                  ENUMERATED {
                                                ms50, ms100, ms150, ms300, ms500, ms1000, spare2,
                                                spare1},
        logicalChannelGroup                 INTEGER (0..3)          OPTIONAL            -- Need OR
    }       OPTIONAL,                                                                   -- Cond UL
    ...,
```


DAINGEAN_0002123

```
    [[  logicalChannelSR-Mask-r9            ENUMERATED {setup}      OPTIONAL        -- Cond SRmask
    ]],
    [[  logicalChannelSR-Prohibit-r12       BOOLEAN                 OPTIONAL        -- Need ON
    ]]
}

-- ASN1STOP
```

LogicalChannelConfig field descriptions
bucketSizeDuration Bucket Size Duration for logical channel prioritization in TS 36.321 [6]. Value in milliseconds. Value ms50 corresponds to 50 ms, ms100 corresponds to 100 ms and so on.
logicalChannelGroup Mapping of logical channel to logical channel group for BSR reporting in TS 36.321 [6].
logicalChannelSR-Mask Controlling SR triggering on a logical channel basis when an uplink grant is configured. See TS 36.321 [6].
logicalChannelSR-Prohibit Value *TRUE* indicates that the *logicalChannelSR-ProhibitTimer* is enabled for the logical channel. E-UTRAN only (optionally) configures the field (i.e. indicates value *TRUE*) if *logicalChannelSR-ProhibitTimer* is configured. See TS 36.321 [6].
prioritisedBitRate Prioritized Bit Rate for logical channel prioritization in TS 36.321 [6]. Value in kilobytes/second. Value kBps0 corresponds to 0 kB/second, kBps8 corresponds to 8 kB/second, kBps16 corresponds to 16 kB/second and so on. Infinity is the only applicable value for SRB1 and SRB2
priority Logical channel priority in TS 36.321 [6]. Value is an integer.

Conditional presence	Explanation
SRmask	The field is optionally present if *ul-SpecificParameters* is present, need OR; otherwise it is not present.
UL	The field is mandatory present for UL logical channels; otherwise it is not present.

– *LWA-Configuration*

The IE *LWA-Configuration* is used to setup/modify/release LTE-WLAN Aggregation.

```
-- ASN1START

LWA-Configuration-r13 ::=           CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        lwa-Config-r13                      LWA-Config-r13
    }
}

LWA-Config-r13 ::=  SEQUENCE {
    lwa-MobilityConfig-r13          WLAN-MobilityConfig-r13     OPTIONAL,   -- Need ON
    lwa-WT-Counter-r13              INTEGER (0..65535)          OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```

LWA-Configuration **field descriptions**
lwa-MobilityConfig Indicates the parameters used for WLAN mobility.
lwa-WT-Counter Indicates the parameter used by UE for WLAN authentication.

– *LWIP-Configuration*

The IE *LWIP-Configuration*is used to add, modify or release DRBs that are using LWIP Tunnel.

```
-- ASN1START
```


DAINGEAN_0002124

```
LWIP-Configuration-r13 ::=          CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        lwip-Config-r13                     LWIP-Config-r13
    }
}

LWIP-Config-r13 ::= SEQUENCE {
    lwip-MobilityConfig-r13         WLAN-MobilityConfig-r13     OPTIONAL,   -- Need ON
    tunnelConfigLWIP-r13            TunnelConfigLWIP-r13        OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```

***LWIP-Configuration* field descriptions**
lwip-MobilityConfig
Indicates the WLAN mobility set for LWIP.
tunnelConfigLWIP
Indicates the parameters used for establishing the LWIP tunnel.

– *MAC-MainConfig*

The IE *MAC-MainConfig* is used to specify the MAC main configuration for signalling and data radio bearers. All MAC main configuration parameters can be configured independently per Cell Group (i.e. MCG or SCG), unless explicitly specified otherwise.

***MAC-MainConfig* information element**

```
-- ASN1START

MAC-MainConfig ::=                  SEQUENCE {
    ul-SCH-Config                       SEQUENCE {
        maxHARQ-Tx                          ENUMERATED {
                                                n1, n2, n3, n4, n5, n6, n7, n8,
                                                n10, n12, n16, n20, n24, n28,
                                                spare2, spare1}     OPTIONAL,   -- Need ON
        periodicBSR-Timer                   PeriodicBSR-Timer-r12   OPTIONAL,   -- Need ON
        retxBSR-Timer                       RetxBSR-Timer-r12,
        ttiBundling                         BOOLEAN
    }                                                               OPTIONAL,   -- Need ON
    drx-Config                          DRX-Config                  OPTIONAL,   -- Need ON
    timeAlignmentTimerDedicated         TimeAlignmentTimer,
    phr-Config                          CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            periodicPHR-Timer                   ENUMERATED {sf10, sf20, sf50, sf100, sf200,
                                                            sf500, sf1000, infinity},
            prohibitPHR-Timer                   ENUMERATED {sf0, sf10, sf20, sf50, sf100,
                                                            sf200, sf500, sf1000},
            dl-PathlossChange                   ENUMERATED {dB1, dB3, dB6, infinity}
        }
    }                                                               OPTIONAL,   -- Need ON
    ...,
    [[  sr-ProhibitTimer-r9             INTEGER (0..7)              OPTIONAL    -- Need ON
    ]],
    [[  mac-MainConfig-v1020            SEQUENCE {
            sCellDeactivationTimer-r10      ENUMERATED {
                                                rf2, rf4, rf8, rf16, rf32, rf64, rf128,
                                                spare}              OPTIONAL,   -- Need OP
            extendedBSR-Sizes-r10           ENUMERATED {setup}          OPTIONAL,   -- Need OR
            extendedPHR-r10                 ENUMERATED {setup}          OPTIONAL    -- Need OR
        }                                                           OPTIONAL    -- Need ON
    ]],
    [[  stag-ToReleaseList-r11          STAG-ToReleaseList-r11      OPTIONAL,   -- Need ON
        stag-ToAddModList-r11           STAG-ToAddModList-r11       OPTIONAL,   -- Need ON
        drx-Config-v1130                DRX-Config-v1130            OPTIONAL    -- Need ON
    ]],
    [[  e-HARQ-Pattern-r12              BOOLEAN                     OPTIONAL,   -- Need ON
        dualConnectivityPHR             CHOICE {
            release                         NULL,
```


DAINGEAN_0002125

```
            setup                                   SEQUENCE {
                phr-ModeOtherCG-r12                     ENUMERATED {real, virtual}
            }
        }                                                                   OPTIONAL,   -- Need ON
        logicalChannelSR-Config-r12     CHOICE {
            release                                 NULL,
            setup                                   SEQUENCE {
                logicalChannelSR-ProhibitTimer-r12      ENUMERATED {sf20, sf40, sf64, sf128, sf512,
sf1024, sf2560, spare1}
            }
        }                                                                   OPTIONAL        -- Need ON
    ]],
    [[  drx-Config-v1310                    DRX-Config-v1310        OPTIONAL,       -- Need ON
        extendedPHR2-r13                    BOOLEAN     OPTIONAL,       -- Need ON
        eDRX-Config-CycleStartOffset-r13    CHOICE {
            release                         NULL,
            setup
                                            CHOICE {
            sf5120                                  INTEGER(0..1),
            sf10240                                 INTEGER(0..3)
            }
        }                                       OPTIONAL    -- Need ON
    ]],
    [[  drx-Config-r13                      CHOICE {
            release                             NULL,
            setup                               DRX-Config-r13
        }                                                               OPTIONAL    -- Need ON
    ]]
}

MAC-MainConfigSCell-r11 ::=         SEQUENCE {
    stag-Id-r11                         STAG-Id-r11     OPTIONAL,   -- Need OP
    ...
}

DRX-Config ::=                      CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        onDurationTimer                     ENUMERATED {
                                                psf1, psf2, psf3, psf4, psf5, psf6,
                                                psf8, psf10, psf20, psf30, psf40,
                                                psf50, psf60, psf80, psf100,
                                                psf200},
        drx-InactivityTimer                 ENUMERATED {
                                                psf1, psf2, psf3, psf4, psf5, psf6,
                                                psf8, psf10, psf20, psf30, psf40,
                                                psf50, psf60, psf80, psf100,
                                                psf200, psf300, psf500, psf750,
                                                psf1280, psf1920, psf2560, psf0-v1020,
                                                spare9, spare8, spare7, spare6,
                                                spare5, spare4, spare3, spare2,
                                                spare1},
        drx-RetransmissionTimer             ENUMERATED {
                                                psf1, psf2, psf4, psf6, psf8, psf16,
                                                psf24, psf33},
        longDRX-CycleStartOffset        CHOICE {
            sf10                            INTEGER(0..9),
            sf20                            INTEGER(0..19),
            sf32                            INTEGER(0..31),
            sf40                            INTEGER(0..39),
            sf64                            INTEGER(0..63),
            sf80                            INTEGER(0..79),
            sf128                           INTEGER(0..127),
            sf160                           INTEGER(0..159),
            sf256                           INTEGER(0..255),
            sf320                           INTEGER(0..319),
            sf512                           INTEGER(0..511),
            sf640                           INTEGER(0..639),
            sf1024                          INTEGER(0..1023),
            sf1280                          INTEGER(0..1279),
            sf2048                          INTEGER(0..2047),
            sf2560                          INTEGER(0..2559)
        },
        shortDRX                            SEQUENCE {
            shortDRX-Cycle                      ENUMERATED  {
                                                    sf2, sf5, sf8, sf10, sf16, sf20,
                                                    sf32, sf40, sf64, sf80, sf128, sf160,
                                                    sf256, sf320, sf512, sf640},
```


DAINGEAN_0002126

```
            drxShortCycleTimer                  INTEGER (1..16)
        }       OPTIONAL                                                -- Need OR
    }
}

DRX-Config-v1130 ::=                    SEQUENCE {
    drx-RetransmissionTimer-v1130           ENUMERATED {psf0-v1130} OPTIONAL,   --Need OR
    longDRX-CycleStartOffset-v1130          CHOICE {
        sf60-v1130                              INTEGER(0..59),
        sf70-v1130                              INTEGER(0..69)
    }                                                               OPTIONAL,   --Need OR
    shortDRX-Cycle-v1130                    ENUMERATED  {sf4-v1130} OPTIONAL    --Need OR
}
DRX-Config-v1310 ::=                    SEQUENCE {
    longDRX-CycleStartOffset-v1310      SEQUENCE {
        sf60-v1310                              INTEGER(0..59)
    }                                                               OPTIONAL    --Need OR
}

DRX-Config-r13 ::=                  SEQUENCE {
    onDurationTimer-v1310                   ENUMERATED {psf300, psf400, psf500, psf600,
                                                psf800, psf1000, psf1200, psf1600}
                                                    OPTIONAL,   --Need OR
    drx-RetransmissionTimer-v1310           ENUMERATED {psf40, psf64, psf80, psf96, psf112,
                                                psf128, psf160, psf320}
                                                    OPTIONAL,   --Need OR
    drx-ULRetransmissionTimer-r13           ENUMERATED {psf0, psf1, psf2, psf4, psf6, psf8, psf16,
                                                    psf24, psf33, psf40, psf64, psf80, psf96,
                                                    psf112, psf128, psf160, psf320}
                                                    OPTIONAL    --Need OR
}

PeriodicBSR-Timer-r12 ::=                   ENUMERATED {
                                                sf5, sf10, sf16, sf20, sf32, sf40, sf64, sf80,
                                                sf128, sf160, sf320, sf640, sf1280, sf2560,
                                                infinity, spare1}

RetxBSR-Timer-r12 ::=                           ENUMERATED {
                                                sf320, sf640, sf1280, sf2560, sf5120,
                                                sf10240, spare2, spare1}

STAG-ToReleaseList-r11 ::=  SEQUENCE (SIZE (1..maxSTAG-r11)) OF STAG-Id-r11

STAG-ToAddModList-r11 ::=   SEQUENCE (SIZE (1..maxSTAG-r11)) OF STAG-ToAddMod-r11

STAG-ToAddMod-r11 ::=       SEQUENCE {
    stag-Id-r11                 STAG-Id-r11,
    timeAlignmentTimerSTAG-r11  TimeAlignmentTimer,
    ...
}

STAG-Id-r11::=              INTEGER (1..maxSTAG-r11)

-- ASN1STOP
```


DAINGEAN_0002127

MAC-MainConfig field descriptions
dl-PathlossChange DL Pathloss Change and the change of the required power backoff due to power management (as allowed by P-MPRc [42]) for PHR reporting in TS 36.321 [6]. Value in dB. Value dB1 corresponds to 1 dB, dB3 corresponds to 3 dB and so on. The same value applies for each serving cell (although the associated functionality is performed independently for each cell).
drx-Config Used to configure DRX as specified in TS 36.321 [6]. E-UTRAN configures the values in *DRX-Config-v1130* only if the UE indicates support for IDC indication. E-UTRAN configures *drx-Config-v1130, drx-Config-v1310 and drx-Config-r13* only if *drx-Config* (without suffix) is configured. E-UTRAN configures *drx-Config-r13* only if UE supports CE.
drx-InactivityTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on.
drx-RetransmissionTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on. In case *drx-RetransmissionTimer-v1130* or *drx-RetransmissionTimer-v1310* is signalled, the UE shall ignore *drx-RetransmissionTimer* (i.e. without suffix).
drx-ULRetransmissionTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf0 correponds to no retransmission timer, value psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on.
drxShortCycleTimer Timer for DRX in TS 36.321 [6]. Value in multiples of shortDRX-Cycle. A value of 1 corresponds to shortDRX-Cycle, a value of 2 corresponds to 2 * shortDRX-Cycle and so on.
dualConnectivityPHR Indicates if power headroom shall be reported using Dual Connectivity Power Headroom Report MAC Control Element defined in TS 36.321 [6] (value *setup*). If PHR functionality and dual connectivity are configured, E-UTRAN always configures the value *setup* for this field and configures *phr-Config* and *dualConnectivityPHR* for both CGs.
e-HARQ-Pattern TRUE indicates that enhanced HARQ pattern for TTI bundling is enabled for FDD. E-UTRAN enables this field only when *ttiBundling* is set to *TRUE*.
eDRX-Config-CycleStartOffset Indicates *longDRX-Cycle* and *drxStartOffset* in TS 36.321 [6]. The value of *longDRX-Cycle* is in number of sub-frames. The value of *drxStartOffset*, in number of subframes, is indicated by the value of *eDRX-Config-CycleStartOffset* multiplied by 2560 plus the offset value configured in *longDRX-CycleStartOffset*. E-UTRAN only configures value *setup* when the value in *longDRX-CycleStartOffset* is sf2560.
extendedBSR-Sizes If value *setup* is configured, the BSR index indicates extended BSR size levels as defined in TS 36.321 [6, Table 6.1.3.1-2].
extendedPHR Indicates if power headroom shall be reported using the Extended Power Headroom Report MAC control element defined in TS 36.321 [6] (value *setup*). E-UTRAN always configures the value *setup* if more than one and up to eight Serving Cell(s) with uplink is configured and none of the serving cells with uplink configured has a *servingCellIndex* higher than seven and if PUCCH on SCell is not configured and if dual connectivity is not configured. E-UTRAN configures *extendedPHR* only if *phr-Config* is configured. The UE shall release *extendedPHR* if *phr-Config* is released.
extendedPHR2 Indicates if power headroom shall be reported using the Extended Power Headeroom Report 2 MAC Control Element defined in TS 36.321 [6] (value *setup*). E-UTRAN always configures the value *setup* if any of the serving cells with uplink configured has a *servingCellIndex* higher than seven or if PUCCH SCell (with any number of serving cells with uplink configured) is configured. E-UTRAN configures *extendedPHR2* only if *phr-Config* is configured. The UE shall release *extendedPHR2* if *phr-Config* is released.
logicalChannelSR-ProhibitTimer Timer used to delay the transmission of an SR for logical channels enabled by *logicalChannelSR-Prohibit*. Value sf20 corresponds to 20 subframes, sf40 corresponds to 40 subframes, and so on. See TS 36.321 [6].
longDRX-CycleStartOffset *longDRX-Cycle* and *drxStartOffset* in TS 36.321 [6] unless *eDRX-Config-CycleStartOffset* is configured. The value of *longDRX-Cycle* is in number of sub-frames. Value sf10 corresponds to 10 sub-frames, sf20 corresponds to 20 sub-frames and so on. If *shortDRX-Cycle* is configured, the value of *longDRX-Cycle* shall be a multiple of the *shortDRX-Cycle* value. The value of *drxStartOffset* value is in number of sub-frames. In case *longDRX-CycleStartOffset-v1130* is signalled, the UE shall ignore *longDRX-CycleStartOffset* (i.e. without suffix).
maxHARQ-Tx Maximum number of transmissions for UL HARQ in TS 36.321 [6].
onDurationTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on. In case *onDurationTimer-v1310* is signalled, the UE shall ignore *onDurationTimer* (i.e. without suffix).

DAINGEAN_0002128

***MAC-MainConfig* field descriptions**
periodicBSR-Timer Timer for BSR reporting in TS 36.321 [6]. Value in number of sub-frames. Value sf10 corresponds to 10 sub-frames, sf20 corresponds to 20 sub-frames and so on.
periodicPHR-Timer Timer for PHR reporting in TS 36.321 [6]. Value in number of sub-frames. Value sf10 corresponds to 10 subframes, sf20 corresponds to 20 subframes and so on.
phr-ModeOtherCG Indicates the mode (i.e. *real* or *virtual)* used for the PHR of the activated cells that are part of the other Cell Group (i.e. MCG or SCG), when DC is configured.
prohibitPHR-Timer Timer for PHR reporting in TS 36.321 [6]. Value in number of sub-frames. Value sf0 corresponds to 0 subframes, sf100 corresponds to 100 subframes and so on.
retxBSR-Timer Timer for BSR reporting in TS 36.321 [6]. Value in number of sub-frames. Value sf640 corresponds to 640 sub-frames, sf1280 corresponds to 1280 sub-frames and so on.
sCellDeactivationTimer SCell deactivation timer in TS 36.321 [6]. Value in number of radio frames. Value rf4 corresponds to 4 radio frames, value rf8 corresponds to 8 radio frames and so on. E-UTRAN only configures the field if the UE is configured with one or more SCells other than the PSCell and PUCCH SCell. If the field is absent, the UE shall delete any existing value for this field and assume the value to be set to *infinity*. The same value applies for each SCell of a Cell Group (i.e. MCG or SCG) (although the associated functionality is performed independently for each SCell). Field *sCellDeactivationTimer* does not apply for the PUCCH SCell.
shortDRX-Cycle Short DRX cycle in TS 36.321 [6]. Value in number of sub-frames. Value sf2 corresponds to 2 sub-frames, sf5 corresponds to 5 subframes and so on. In case *shortDRX-Cycle-v1130* is signalled, the UE shall ignore *shortDRX-Cycle* (i.e. without suffix). Short DRX cycle is not configured for UEs in CE.
sr-ProhibitTimer Timer for SR transmission on PUCCH in TS 36.321 [6]. Value in number of SR period(s) of shortest SR period of any serving cell with PUCCH. Value 0 means no timer for SR transmission on PUCCH is configured. Value 1 corresponds to one SR period, Value 2 corresponds to 2*SR periods and so on. SR period is defined in TS 36.213 [23, table 10.1.5-1].
stag-Id Indicates the TAG of an SCell, see TS 36.321 [6]. Uniquely identifies the TAG within the scope of a Cell Group (i.e. MCG or SCG). If the field is not configured for an SCell (e.g. absent in *MAC-MainConfigSCell*), the SCell is part of the PTAG.
stag-ToAddModList, stag-ToReleaseList Used to configure one or more STAGs. E-UTRAN ensures that a STAG contains at least one SCell with configured uplink. If, due to SCell release a reconfiguration would result in an 'empty' TAG, E-UTRAN includes release of the concerned TAG.
timeAlignmentTimerSTAG Indicates the value of the time alignment timer for an STAG, see TS 36.321 [6].
ttiBundling TRUE indicates that TTI bundling TS 36.321 [6] is enabled while FALSE indicates that TTI bundling is disabled. TTI bundling can be enabled for FDD and for TDD only for configurations 0, 1 and 6. The functionality is performed independently per Cell Group (i.e. MCG or SCG), but E-UTRAN does not configure TTI bundling for the SCG. For a TDD PCell, E-UTRAN does not simultaneously enable TTI bundling and semi-persistent scheduling in this release of specification. Furthermore, for a Cell Group, E-UTRAN does not simultaneously configure TTI bundling and SCells with configured uplink, and E-UTRAN does not simultaneously configure TTI bundling and eIMTA.

– *P-C-AndCBSR*

The IE *P-C-AndCBSR* is used to specify the power control and codebook subset restriction configuration.

P-C-AndCBSR information elements

```
-- ASN1START

P-C-AndCBSR-r11 ::= SEQUENCE {
    p-C-r11                         INTEGER (-8..15),
    codebookSubsetRestriction-r11   BIT STRING
}

P-C-AndCBSR-r13 ::= SEQUENCE {
    p-C-r13                         INTEGER (-8..15),
    cbsr-Selection-r13              CHOICE{
        nonPrecoded-r13                 SEQUENCE {
```


DAINGEAN_0002129

```
            codebookSubsetRestriction1-r13              BIT STRING,
            codebookSubsetRestriction2-r13              BIT STRING
        },
        beamformedK1a-r13           SEQUENCE {
            codebookSubsetRestriction3-r13              BIT STRING
        },
        beamformedKN-r13            SEQUENCE {
            codebookSubsetRestriction-r13               BIT STRING
        }
    },
    ...
}

P-C-AndCBSR-Pair-r13a ::=   SEQUENCE (SIZE (1..2)) OF P-C-AndCBSR-r11

P-C-AndCBSR-Pair-r13 ::=    SEQUENCE (SIZE (1..2)) OF P-C-AndCBSR-r13

-- ASN1STOP
```

***P-C-AndCBSR* field descriptions**
cbsr-Selection Indicates which codebook subset restriction parameter(s) are to be used. E-UTRAN applies values *nonPrecoded* when *eMIMO-Type* is set to *nonPrecoded*. E-UTRAN applies value *beamformedK1a* when *eMIMO-Type* is set to *beamformed*, *alternativeCodebookEnabledBeamformed* is set to *TRUE* and *csi-RS-ConfigNZPIdListExt* is not configured. E-UTRAN applies value *beamformedKN* when *csi-RS-ConfigNZPIdListExt* is configured. E-UTRAN applies value *beamformedKN* when *eMIMO-Type* is set to *beamformed*, *csi-RS-ConfigNZPIdListExt* is not configured and *alternativeCodebookEnabledBeamformed* is set to *FALSE*.
codebookSubsetRestriction Parameter: codebookSubsetRestriction, see TS 36.213 [23] and TS 36.211 [21]. The number of bits in the *codebookSubsetRestriction* for applicable transmission modes is defined in TS 36.213 [23].
codebookSubsetRestriction1 Parameter: codebookSubsetRestriction1, see TS 36.213 [23, Table 7.2-1d]. The number of bits in the *codebookSubsetRestriction1* for applicable transmission modes is defined in TS 36.213 [23].
codebookSubsetRestriction2 Parameter: codebookSubsetRestriction2, see TS 36.213 [23, Table 7.2-1e]. The number of bits in the *codebookSubsetRestriction2* for applicable transmission modes is defined in TS 36.213 [23].
codebookSubsetRestriction3 Parameter: codebookSubsetRestriction3, see TS 36.213 [23, Table 7.2-1f]. The UE shall ignore *codebookSubsetRestriction-r11* or *codebookSubsetRestriction-r10* if *codebookSubsetRestriction3-r13* is configured. The number of bits in the *codebookSubsetRestriction3* for applicable transmission modes is defined in TS 36.213 [23].
p-C Parameter: P_C, see TS 36.213 [23, 7.2.5].
P-C-AndCBSR-Pair E-UTRAN includes a single entry if the UE is configured with TM9. If the UE is configured with TM10 and E-UTRAN includes 2 entries, this indicates that the subframe patterns configured for CSI (CQI/PMI/PTI/RI/CRI) reporting (i.e. as defined by field *csi-MeasSubframeSet1* and *csi-MeasSubframeSet2*, or as defined by *csi-MeasSubframeSets-r12*) are to be used for this CSI process, while including a single entry indicates that the subframe patterns are not to be used for this CSI process. For a UE configured with TM10, E-UTRAN does not include 2 entries with *csi-MeasSubframeSet1* and *csi-MeasSubframeSet2* for CSI processes concerning a secondary frequency. Furthermore, E-UTRAN includes 2 entries when configuring both *cqi-pmi-ConfigIndex* and *cqi-pmi-ConfigIndex2*.

– *PDCCH-ConfigSCell*

The IE PDCCH-Config specifies PDCCH monitoring parameters that E-UTRAN may configure for a serving cell.

***PDCCH-ConfigSCell* information element**

```
-- ASN1START

PDCCH-ConfigSCell-r13 ::=       SEQUENCE {
    skipMonitoringDCI-format0-1A-r13    ENUMERATED {true}               OPTIONAL    -- Need OR
}

PDCCH-CandidateReductionValue-r13 ::= ENUMERATED {n0, n33, n66, n100}

PDCCH-CandidateReductions-r13 ::= CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
```


DAINGEAN_0002130

```
        pdcch-candidateReductionAL1     PDCCH-CandidateReductionValue-r13,
        pdcch-candidateReductionAL2     PDCCH-CandidateReductionValue-r13,
        pdcch-candidateReductionAL3     PDCCH-CandidateReductionValue-r13,
        pdcch-candidateReductionAL4     PDCCH-CandidateReductionValue-r13,
        pdcch-candidateReductionAL5     PDCCH-CandidateReductionValue-r13
    }
}

-- ASN1STOP
```

***PDCCH-Config* field descriptions**
skipMonitoringDCI-format0-1A
Indicates whether the UE is configured to omit monitoring DCI fromat 0/1A, see TS 36.213 [23, 9.1.1].
pdcch-candidateReductionALx
Indicates reduced (E)PDCCH monitoring requirements on user specific search space of the x-th aggregation level, see TS 36.213 [23, 9.1.1]. n0 corresponds to value 0%, n33 corresponds to 33% and so on.

– *PDCP-Config*

The IE *PDCP-Config* is used to set the configurable PDCP parameters for data radio bearers.

PDCP-Config information element

```
-- ASN1START

PDCP-Config ::=                     SEQUENCE {
    discardTimer                        ENUMERATED {
                                            ms50, ms100, ms150, ms300, ms500,
                                            ms750, ms1500, infinity
    }                                                       OPTIONAL,           -- Cond Setup
    rlc-AM                              SEQUENCE {
        statusReportRequired                BOOLEAN
    }                                                       OPTIONAL,           -- Cond Rlc-AM
    rlc-UM                              SEQUENCE {
        pdcp-SN-Size                        ENUMERATED {len7bits, len12bits}
    }                                                       OPTIONAL,           -- Cond Rlc-UM
    headerCompression                   CHOICE {
        notUsed                             NULL,
        rohc                                SEQUENCE {
            maxCID                              INTEGER (1..16383)              DEFAULT 15,
            profiles                            SEQUENCE {
                profile0x0001                       BOOLEAN,
                profile0x0002                       BOOLEAN,
                profile0x0003                       BOOLEAN,
                profile0x0004                       BOOLEAN,
                profile0x0006                       BOOLEAN,
                profile0x0101                       BOOLEAN,
                profile0x0102                       BOOLEAN,
                profile0x0103                       BOOLEAN,
                profile0x0104                       BOOLEAN
            },
            ...
        }
    },
    ...,
    [[  rn-IntegrityProtection-r10      ENUMERATED {enabled}    OPTIONAL    -- Cond RN
    ]],
    [[  pdcp-SN-Size-v1130              ENUMERATED {len15bits}  OPTIONAL    -- Cond Rlc-AM2
    ]],
    [[  ul-DataSplitDRB-ViaSCG-r12      BOOLEAN     OPTIONAL,   -- Need ON
        t-Reordering-r12                ENUMERATED {
                                        ms0, ms20, ms40, ms60, ms80, ms100, ms120, ms140,
                                        ms160, ms180, ms200, ms220, ms240, ms260, ms280, ms300,
                                        ms500, ms750, spare14, spare13, spare12, spare11, spare10,
                                        spare9, spare8, spare7, spare6, spare5, spare4, spare3,
                                        spare2, spare1}                 OPTIONAL    -- Cond SetupS
    ]],
    [[  ul-DataSplitThreshold-r13       CHOICE {
            release                     NULL,
            setup                       ENUMERATED {
                                        b0, b100, b200, b400, b800, b1600, b3200, b6400, b12800,
                                        b25600, b51200, b102400, b204800, b409600, b819200,
                                        spare1}
```


DAINGEAN_0002131

```
        }                                                       OPTIONAL,   -- Need ON
        pdcp-SN-Size-v1310              ENUMERATED {len18bits}  OPTIONAL,   -- Cond Rlc-AM3
        statusFeedback-r13              CHOICE {
            release                     NULL,
            setup                       SEQUENCE {
                statusPDU-TypeForPolling-r13        ENUMERATED {type1, type2}       OPTIONAL,   --
Need ON
                statusPDU-Periodicity-Type1-r13     ENUMERATED {
                                        ms5, ms10, ms20, ms30, ms40, ms50, ms60, ms70, ms80, ms90,
                                        ms100, ms150, ms200, ms300, ms500, ms1000, ms2000, ms5000,
                                        ms10000, ms20000, ms50000}      OPTIONAL,   -- Need ON
                statusPDU-Periodicity-Type2-r13     ENUMERATED {
                                        ms5, ms10, ms20, ms30, ms40, ms50, ms60, ms70, ms80, ms90,
                                        ms100, ms150, ms200, ms300, ms500, ms1000, ms2000, ms5000,
                                        ms10000, ms20000, ms50000}      OPTIONAL,   -- Need ON
                statusPDU-Periodicity-Offset-r13    ENUMERATED {
                                        ms1, ms2, ms5, ms10, ms25, ms50, ms100, ms250, ms500,
                                        ms2500, ms5000, ms25000}    OPTIONAL    -- Need ON
            }
        }                                                       OPTIONAL    -- Need ON
    ]]

}

-- ASN1STOP
```


DAINGEAN_0002132

***PDCP-Config* field descriptions**
discardTimer Indicates the discard timer value specified in TS 36.323 [8]. Value in milliseconds. Value ms50 means 50 ms, ms100 means 100 ms and so on.
headerCompression E-UTRAN does not reconfigure header compression for an MCG DRB except for upon handover and upon the first reconfiguration after RRC connection re-establishment. E-UTRAN does not reconfigure header compression for a SCG DRB except for upon SCG change involving PDCP re-establishment. For split and LWA DRBs E-UTRAN configures only *notUsed*.
maxCID Indicates the value of the MAX_CID parameter as specified in TS 36.323 [8]. The total value of MAX_CIDs across all bearers for the UE should be less than or equal to the value of *maxNumberROHC-ContextSessions* parameter as indicated by the UE.
pdcp-SN-Size Indicates the PDCP Sequence Number length in bits. For RLC UM: value *len7bits* means that the 7-bit PDCP SN format is used and *len12bits* means that the 12-bit PDCP SN format is used. For RLC AM: value *len15bits* means that the 15-bit PDCP SN format is used, value *len18bits* means that the 18-bit PDCP SN format is used, otherwise if the field is not included upon setup of the PCDP entity 12-bit PDCP SN format is used, as specified in TS 36.323 [8].
profiles The profiles used by both compressor and decompressor in both UE and E-UTRAN. The field indicates which of the ROHC profiles specified in TS 36.323 [8] are supported, i.e. value *true* indicates that the profile is supported. Profile 0x0000 shall always be supported when the use of ROHC is configured. If support of two ROHC profile identifiers with the same 8 LSB's is signalled, only the profile corresponding to the highest value shall be applied. E-UTRAN does not configure ROHC while *t-Reordering* is configured (i.e. for split DRBs, for LWA bearers or upon reconfiguration from split or LWA to MCG DRB).
statusFeedback Indicates whether the UE shall send PDCP Status Report periodically or by E-UTRAN polling as specified in TS 36.323 [8].
statusPDU-TypeForPolling Indicates the PDCP Control PDU option when it is triggered by E-UTRAN polling. Value type1 indicates using the legacy PDCP Control PDU for PDCP status reporting and value type2 indicates using the LWA specific PDCP Control PDU for LWA status reporting as specified in TS 36.323 [8].
statusPDU-Periodicity-Type1 Indicates the value of the PDCP Status reporting periodicity for type1 Status PDU, as specified in TS 36.323 [8]. Value in milliseconds. Value ms5 means 5 ms, ms10 means 10 ms and so on.
statusPDU-Periodicity-Type2 Indicates the value of the PDCP Status reporting periodicity for type2 Status PDU, as specified in TS 36.323 [8]. Value in milliseconds. Value ms5 means 5 ms, ms10 means 10 ms and so on.
statusPDU-Periodicity-Offset Indicates the value of the offset for type2 Status PDU periodicity, as specified in TS 36.323 [8]. Value in milliseconds. Value ms1 means 1 ms, ms2 means 2 ms and so on.
t-Reordering Indicates the value of the reordering timer, as specified in TS 36.323 [8]. Value in milliseconds. Value ms0 means 0 ms, ms20 means 20 ms and so on.
rn-IntegrityProtection Indicates that integrity protection or verification shall be applied for all subsequent packets received and sent by the RN on the DRB.
statusReportRequired Indicates whether or not the UE shall send a PDCP Status Report upon re-establishment of the PDCP entity and upon PDCP data recovery as specified in TS 36.323 [8].
ul-DataSplitDRB-ViaSCG Indicates whether the UE shall send PDCP PDUs via SCG as specified in TS 36.323 [8]. E-UTRAN only configures the field (i.e. indicates value *TRUE*) for split DRBs.
ul-DataSplitThreshold Indicates the threshold value for uplink data split operation specified in TS 36.323 [8]. Value b100 means 100 Bytes, b200 means 200 Bytes and so on. E-UTRAN only configures this field for split DRBs.

DAINGEAN_0002133

Conditional presence	Explanation
Rlc-AM	The field is mandatory present upon setup of a PDCP entity for a radio bearer configured with RLC AM. The field is optional, need ON, in case of reconfiguration of a PDCP entity at handover, at the first reconfiguration after RRC re-establishment or at SCG change involving PDCP re-establishment or PDCP data recovery for a radio bearer configured with RLC AM. Otherwise the field is not present.
Rlc-AM2	The field is optionally present, need OP, upon setup of a PDCP entity for a radio bearer configured with RLC AM. Otherwise the field is not present.
Rlc-AM3	The field is optionally present, need OP, upon setup of a PDCP entity for a radio bearer configured with RLC AM, if *pdcp-SN-Size-v1130* is absent. Otherwise the field is not present.
Rlc-UM	The field is mandatory present upon setup of a PDCP entity for a radio bearer configured with RLC UM. It is optionally present, Need ON, upon handover within E-UTRA, upon the first reconfiguration after re-establishment and upon SCG change involving PDCP re-establishment. Otherwise the field is not present.
RN	The field is optionally present when signalled to the RN, need OR. Otherwise the field is not present.
Setup	The field is mandatory present in case of radio bearer setup. Otherwise the field is optionally present, need ON.
SetupS	The field is mandatory present in case of setup of or reconfiguration to a split DRB or LWA DRB. The field is optionally present upon reconfiguration of a split DRB or LWA DRB or upon DRB type change from split to MCG DRB or from LWA to LTE only, need ON. Otherwise the field is not present.

– *PDSCH-Config*

The IE *PDSCH-ConfigCommon* and the IE *PDSCH-ConfigDedicated* are used to specify the common and the UE specific PDSCH configuration respectively.

PDSCH-Config information element

```
-- ASN1START

PDSCH-ConfigCommon ::=      SEQUENCE {
    referenceSignalPower                INTEGER (-60..50),
    p-b                                 INTEGER (0..3)
}

PDSCH-ConfigCommon-v1310 ::=    SEQUENCE {
    pdsch-maxNumRepetitionCEmodeA-r13   ENUMERATED {
                                            r16, r32 }                  OPTIONAL,   -- Need OR
    pdsch-maxNumRepetitionCEmodeB-r13   ENUMERATED {
                                            r192, r256, r384, r512, r768, r1024,
                                            r1536, r2048}                   OPTIONAL    -- Need OR
}

PDSCH-ConfigDedicated::=        SEQUENCE {
    p-a                                 ENUMERATED {
                                            dB-6, dB-4dot77, dB-3, dB-1dot77,
                                            dB0, dB1, dB2, dB3}
}

PDSCH-ConfigDedicated-v1130 ::=     SEQUENCE {
    dmrs-ConfigPDSCH-r11                DMRS-Config-r11                 OPTIONAL,   -- Need ON
    qcl-Operation                       ENUMERATED {typeA, typeB}           OPTIONAL,   -- Need OR
    re-MappingQCLConfigToReleaseList-r11    RE-MappingQCLConfigToReleaseList-r11    OPTIONAL,   --
Need ON
    re-MappingQCLConfigToAddModList-r11     RE-MappingQCLConfigToAddModList-r11     OPTIONAL    --
Need ON
}

PDSCH-ConfigDedicated-v1280 ::=     SEQUENCE {
    tbsIndexAlt-r12                     ENUMERATED {a26, a33}               OPTIONAL    -- Need OR
}

PDSCH-ConfigDedicated-v1310 ::=     SEQUENCE {
    dmrs-ConfigPDSCH-v1310              DMRS-Config-v1310                   OPTIONAL    -- Need ON
}
```


DAINGEAN_0002134

```
RE-MappingQCLConfigToAddModList-r11 ::=     SEQUENCE (SIZE (1..maxRE-MapQCL-r11)) OF PDSCH-RE-
MappingQCL-Config-r11

RE-MappingQCLConfigToReleaseList-r11 ::=    SEQUENCE (SIZE (1..maxRE-MapQCL-r11)) OF PDSCH-RE-
MappingQCL-ConfigId-r11

PDSCH-RE-MappingQCL-Config-r11 ::=      SEQUENCE {
    pdsch-RE-MappingQCL-ConfigId-r11    PDSCH-RE-MappingQCL-ConfigId-r11,
    optionalSetOfFields-r11             SEQUENCE {
        crs-PortsCount-r11                  ENUMERATED {n1, n2, n4, spare1},
        crs-FreqShift-r11                   INTEGER (0..5),
        mbsfn-SubframeConfigList-r11        CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                subframeConfigList                  MBSFN-SubframeConfigList
            }
        }                                                                   OPTIONAL,   -- Need ON
        pdsch-Start-r11                     ENUMERATED {reserved, n1, n2, n3, n4, assigned}
    }                                                                       OPTIONAL,   -- Need OP
    csi-RS-ConfigZPId-r11               CSI-RS-ConfigZPId-r11,
    qcl-CSI-RS-ConfigNZPId-r11          CSI-RS-ConfigNZPId-r11              OPTIONAL,   -- Need OR
    ...
}

-- ASN1STOP
```

***PDSCH-Config* field descriptions**
optionalSetOfFields If absent, the UE releases the configuration provided previously, if any, and applies the values from the serving cell configured on the same frequency.
p-a Parameter: P_A , see TS 36.213 [23, 5.2]. Value dB-6 corresponds to -6 dB, dB-4dot77 corresponds to -4.77 dB etc.
p-b Parameter: P_B , see TS 36.213 [23, Table 5.2-1].
pdsch-maxNumRepetitionCEmodeA Maximum value to indicate the set of PDSCH repetition numbers for CE mode A, see TS 36.211 [21] and TS 36.213 [23].
pdsch-maxNumRepetitionCEmodeB Maximum value to indicate the set of PDSCH repetition numbers for CE mode B, see TS 36.211 [21] and TS 36.213 [23].
pdsch-Start The starting OFDM symbol of PDSCH for the concerned serving cell, see TS 36.213 [23. 7.1.6.4]. Values 1, 2, 3 are applicable when *dl-Bandwidth* for the concerned serving cell is greater than 10 resource blocks, values 2, 3, 4 are applicable when *dl-Bandwidth* for the concerned serving cell is less than or equal to 10 resource blocks, see TS 36.211 [21, Table 6.7-1]. Value *n1* corresponds to 1, value *n2* corresponds to 2 and so on.
qcl-CSI-RS-ConfigNZPId Indicates the CSI-RS resource that is quasi co-located with the PDSCH antenna ports, see TS 36.213 [23, 7.1.9]. E-UTRAN configures this field if and only if the UE is configured with *qcl-Operation* set to *typeB*.
qcl-Operation Indicates the quasi co-location behaviour to be used by the UE, type A and type B, as described in TS 36.213 [23, 7.1.10].
referenceSignalPower Parameter: *Reference-signal power*, which provides the downlink reference-signal EPRE, see TS 36.213 [23, 5.2]. The actual value in dBm.
re-MappingQCLConfigToAddModList, re-MappingQCLConfigToReleaseList For a serving frequency E-UTRAN configures at least one *PDSCH-RE-MappingQCL-Config* when transmission mode 10 is configured for the serving cell on this carrier frequency. Otherwise it does not configure this field.
tbsIndexAlt Indicates the applicability of the alternative TBS index for the I_{TBS} 26 and 33 (see TS 36.213 [23, Table 7.1.7.2.1-1]) to all subframes scheduled by DCI format 2C or 2D. Value *a26* refers to the alternative TBS index I_{TBS} 26A, and value *a33* refers to the alternative TBS index I_{TBS} 33A. If this field is not configured, the UE shall use I_{TBS} 26 and 33 specified in Table 7.1.7.2.1-1 in TS 36.213 [23] for all subframes instead.

DAINGEAN_0002135

– PDSCH-RE-MappingQCL-ConfigId

The IE *PDSCH-RE-MappingQCL-ConfigId* is used to identify a set of PDSCH parameters related to resource element mapping and quasi co-location, as configured by the IE *PDSCH-RE-MappingQCL-Config*. The identity is unique within the scope of a carrier frequency.

PDSCH-RE-MappingQCL-ConfigId information elements

```
-- ASN1START

PDSCH-RE-MappingQCL-ConfigId-r11 ::=        INTEGER (1..maxRE-MapQCL-r11)

-- ASN1STOP
```

– PHICH-Config

The IE *PHICH-Config* is used to specify the PHICH configuration.

PHICH-Config information element

```
-- ASN1START

PHICH-Config ::=                    SEQUENCE {
    phich-Duration                      ENUMERATED {normal, extended},
    phich-Resource                      ENUMERATED {oneSixth, half, one, two}
}

-- ASN1STOP
```

PHICH-Config field descriptions
phich-Duration Parameter: *PHICH-Duration*, see TS 36.211 [21, Table 6.9.3-1].
phich-Resource Parameter: *Ng*, see TS 36.211 [21, 6.9]. Value oneSixth corresponds to 1/6, half corresponds to 1/2 and so on.

– PhysicalConfigDedicated

The IE *PhysicalConfigDedicated* is used to specify the UE specific physical channel configuration.

PhysicalConfigDedicated information element

```
-- ASN1START

PhysicalConfigDedicated ::=     SEQUENCE {
    pdsch-ConfigDedicated               PDSCH-ConfigDedicated           OPTIONAL,       -- Need ON
    pucch-ConfigDedicated               PUCCH-ConfigDedicated           OPTIONAL,       -- Need ON
    pusch-ConfigDedicated               PUSCH-ConfigDedicated           OPTIONAL,       -- Need ON
    uplinkPowerControlDedicated         UplinkPowerControlDedicated     OPTIONAL,       -- Need ON
    tpc-PDCCH-ConfigPUCCH               TPC-PDCCH-Config                OPTIONAL,       -- Need ON
    tpc-PDCCH-ConfigPUSCH               TPC-PDCCH-Config                OPTIONAL,       -- Need ON
    cqi-ReportConfig                    CQI-ReportConfig                OPTIONAL,       -- Cond CQI-
r8
    soundingRS-UL-ConfigDedicated       SoundingRS-UL-ConfigDedicated   OPTIONAL,       -- Need ON
    antennaInfo                         CHOICE {
        explicitValue                       AntennaInfoDedicated,
        defaultValue                        NULL
    }                                                                   OPTIONAL,   -- Cond AI-r8
    schedulingRequestConfig             SchedulingRequestConfig         OPTIONAL,       -- Need ON
    ...,
    [[  cqi-ReportConfig-v920               CQI-ReportConfig-v920       OPTIONAL,       -- Cond CQI-
r8
        antennaInfo-v920                    AntennaInfoDedicated-v920   OPTIONAL        -- Cond AI-
r8
    ]],
    [[  antennaInfo-r10                 CHOICE {
            explicitValue-r10               AntennaInfoDedicated-r10,
            defaultValue                    NULL
        }                                                               OPTIONAL,   -- Cond AI-r10
```


DAINGEAN_0002136

```
        antennaInfoUL-r10               AntennaInfoUL-r10               OPTIONAL,       -- Need ON
        cif-Presence-r10                BOOLEAN                         OPTIONAL,       -- Need ON
        cqi-ReportConfig-r10            CQI-ReportConfig-r10            OPTIONAL,    -- Cond CQI-r10
        csi-RS-Config-r10               CSI-RS-Config-r10               OPTIONAL,       -- Need ON
        pucch-ConfigDedicated-v1020     PUCCH-ConfigDedicated-v1020     OPTIONAL,       -- Need ON
        pusch-ConfigDedicated-v1020     PUSCH-ConfigDedicated-v1020     OPTIONAL,       -- Need ON
        schedulingRequestConfig-v1020   SchedulingRequestConfig-v1020   OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicated-v1020
                                SoundingRS-UL-ConfigDedicated-v1020     OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodic-r10
                            SoundingRS-UL-ConfigDedicatedAperiodic-r10  OPTIONAL,       -- Need ON
        uplinkPowerControlDedicated-v1020
                                UplinkPowerControlDedicated-v1020   OPTIONAL        -- Need ON
    ]],
    [[  additionalSpectrumEmissionCA-r10            CHOICE {
            release                                 NULL,
            setup                                   SEQUENCE {
                additionalSpectrumEmissionPCell-r10     AdditionalSpectrumEmission
            }
        }           OPTIONAL    -- Need ON
    ]],
    [[  -- DL configuration as well as configuration applicable for DL and UL
        csi-RS-ConfigNZPToReleaseList-r11
                                CSI-RS-ConfigNZPToReleaseList-r11   OPTIONAL,       -- Need ON
        csi-RS-ConfigNZPToAddModList-r11
                                CSI-RS-ConfigNZPToAddModList-r11    OPTIONAL,       -- Need ON
        csi-RS-ConfigZPToReleaseList-r11
                                CSI-RS-ConfigZPToReleaseList-r11    OPTIONAL,       -- Need ON
        csi-RS-ConfigZPToAddModList-r11 CSI-RS-ConfigZPToAddModList-r11 OPTIONAL,       -- Need ON
        epdcch-Config-r11               EPDCCH-Config-r11               OPTIONAL,       -- Need ON
        pdsch-ConfigDedicated-v1130     PDSCH-ConfigDedicated-v1130     OPTIONAL,       -- Need ON
    -- UL configuration
        cqi-ReportConfig-v1130          CQI-ReportConfig-v1130          OPTIONAL,       -- Need ON
        pucch-ConfigDedicated-v1130     PUCCH-ConfigDedicated-v1130     OPTIONAL,       -- Need ON
        pusch-ConfigDedicated-v1130     PUSCH-ConfigDedicated-v1130     OPTIONAL,       -- Need ON
        uplinkPowerControlDedicated-v1130
                                UplinkPowerControlDedicated-v1130   OPTIONAL        -- Need ON
    ]],
    [[  antennaInfo-v1250               AntennaInfoDedicated-v1250      OPTIONAL,    -- Cond AI-r10
        eimta-MainConfig-r12            EIMTA-MainConfig-r12            OPTIONAL,       -- Need ON
        eimta-MainConfigPCell-r12       EIMTA-MainConfigServCell-r12    OPTIONAL,       -- Need ON
        pucch-ConfigDedicated-v1250     PUCCH-ConfigDedicated-v1250     OPTIONAL,       -- Need ON
        cqi-ReportConfigPCell-v1250     CQI-ReportConfig-v1250          OPTIONAL,       -- Need ON
        uplinkPowerControlDedicated-v1250
                                UplinkPowerControlDedicated-v1250   OPTIONAL,       -- Need ON
        pusch-ConfigDedicated-v1250     PUSCH-ConfigDedicated-v1250     OPTIONAL,       -- Need ON
        csi-RS-Config-v1250                 CSI-RS-Config-v1250         OPTIONAL        -- Need ON
    ]],
    [[  pdsch-ConfigDedicated-v1280         PDSCH-ConfigDedicated-v1280 OPTIONAL        -- Need ON
    ]],
    [[  pdsch-ConfigDedicated-v1310         PDSCH-ConfigDedicated-v1310 OPTIONAL,       -- Need ON
        pucch-ConfigDedicated-r13           PUCCH-ConfigDedicated-r13   OPTIONAL,       -- Need ON
        pusch-ConfigDedicated-r13           PUSCH-ConfigDedicated-r13   OPTIONAL,       -- Need ON
        pdcch-CandidateReductions-r13
                                PDCCH-CandidateReductions-r13   OPTIONAL,       -- Need ON
        cqi-ReportConfig-v1310                  CQI-ReportConfig-v1310  OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicated-v1310
                            SoundingRS-UL-ConfigDedicated-v1310     OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedUpPTsExt-r13
                        SoundingRS-UL-ConfigDedicatedUpPTsExt-r13   OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodic-v1310
                        SoundingRS-UL-ConfigDedicatedAperiodic-v1310    OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodicUpPTsExt-r13
                SoundingRS-UL-ConfigDedicatedAperiodicUpPTsExt-r13  OPTIONAL,       -- Need ON
        csi-RS-Config-v1310             CSI-RS-Config-v1310             OPTIONAL,       -- Need ON
        ce-Mode-r13                 CHOICE {
            release                     NULL,
            setup                       ENUMERATED {ce-ModeA,ce-ModeB}
        }                                                               OPTIONAL,       -- Need ON
        csi-RS-ConfigNZPToAddModListExt-r13 CSI-RS-ConfigNZPToAddModListExt-r13 OPTIONAL,   -- Need
ON
        csi-RS-ConfigNZPToReleaseListExt-r13    CSI-RS-ConfigNZPToReleaseListExt-r13    OPTIONAL  --
Need ON
    ]],
    [[  cqi-ReportConfig-v1320                  CQI-ReportConfig-v1320  OPTIONAL        -- Need ON
    ]]
}
```


DAINGEAN_0002137

```
PhysicalConfigDedicatedSCell-r10 ::=        SEQUENCE {
    -- DL configuration as well as configuration applicable for DL and UL
    nonUL-Configuration-r10                 SEQUENCE {
        antennaInfo-r10
                                            AntennaInfoDedicated-r10    OPTIONAL,       -- Need ON
        crossCarrierSchedulingConfig-r10
                                    CrossCarrierSchedulingConfig-r10    OPTIONAL,       -- Need ON
        csi-RS-Config-r10                       CSI-RS-Config-r10       OPTIONAL,       -- Need ON
        pdsch-ConfigDedicated-r10               PDSCH-ConfigDedicated   OPTIONAL        -- Need ON
    }                                                                   OPTIONAL,   -- Cond SCellAdd
    -- UL configuration
    ul-Configuration-r10                    SEQUENCE {
        antennaInfoUL-r10                       AntennaInfoUL-r10       OPTIONAL,       -- Need ON
        pusch-ConfigDedicatedSCell-r10
                                PUSCH-ConfigDedicatedSCell-r10      OPTIONAL,   -- Cond PUSCH-SCell1
        uplinkPowerControlDedicatedSCell-r10
                                UplinkPowerControlDedicatedSCell-r10    OPTIONAL,       -- Need ON
        cqi-ReportConfigSCell-r10           CQI-ReportConfigSCell-r10   OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicated-r10
                                    SoundingRS-UL-ConfigDedicated   OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicated-v1020
                                SoundingRS-UL-ConfigDedicated-v1020 OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodic-r10
                        SoundingRS-UL-ConfigDedicatedAperiodic-r10  OPTIONAL    -- Need ON
    }                                                               OPTIONAL,   -- Cond CommonUL
    ...,
    [[  -- DL configuration as well as configuration applicable for DL and UL
        csi-RS-ConfigNZPToReleaseList-r11
                                CSI-RS-ConfigNZPToReleaseList-r11   OPTIONAL,       -- Need ON
        csi-RS-ConfigNZPToAddModList-r11
                                CSI-RS-ConfigNZPToAddModList-r11    OPTIONAL,       -- Need ON
        csi-RS-ConfigZPToReleaseList-r11
                                CSI-RS-ConfigZPToReleaseList-r11    OPTIONAL,       -- Need ON
        csi-RS-ConfigZPToAddModList-r11
                                    CSI-RS-ConfigZPToAddModList-r11 OPTIONAL,       -- Need ON
        epdcch-Config-r11               EPDCCH-Config-r11           OPTIONAL,       -- Need ON
        pdsch-ConfigDedicated-v1130     PDSCH-ConfigDedicated-v1130 OPTIONAL,       -- Need ON
    -- UL configuration
        cqi-ReportConfig-v1130          CQI-ReportConfig-v1130      OPTIONAL,       -- Need ON
        pusch-ConfigDedicated-v1130
                                PUSCH-ConfigDedicated-v1130     OPTIONAL,   -- Cond PUSCH-SCell1
        uplinkPowerControlDedicatedSCell-v1130
                                UplinkPowerControlDedicated-v1130   OPTIONAL        -- Need ON
    ]],
    [[  antennaInfo-v1250               AntennaInfoDedicated-v1250  OPTIONAL,       -- Need ON
        eimta-MainConfigSCell-r12
                                EIMTA-MainConfigServCell-r12    OPTIONAL,       -- Need ON
        cqi-ReportConfigSCell-v1250     CQI-ReportConfig-v1250      OPTIONAL,       -- Need ON
        uplinkPowerControlDedicatedSCell-v1250
                                UplinkPowerControlDedicated-v1250   OPTIONAL,       -- Need ON
        csi-RS-Config-v1250             CSI-RS-Config-v1250         OPTIONAL        -- Need ON
    ]],
    [[  pdsch-ConfigDedicated-v1280     PDSCH-ConfigDedicated-v1280 OPTIONAL        -- Need ON
    ]],
    [[  pucch-Cell-r13                  ENUMERATED {true}       OPTIONAL,   -- Cond PUCCH-SCell1
        pucch-SCell                     CHOICE{
            release                         NULL,
            setup                           SEQUENCE {
                pucch-ConfigDedicated-r13
                                            PUCCH-ConfigDedicated-r13   OPTIONAL,       -- Need ON
                schedulingRequestConfig-r13
                                        SchedulingRequestConfigSCell-r13    OPTIONAL,       -- Need ON
                tpc-PDCCH-ConfigPUCCH-SCell-r13
                                            TPC-PDCCH-ConfigSCell-r13   OPTIONAL,       -- Need ON
                pusch-ConfigDedicated-r13
                                        PUSCH-ConfigDedicated-r13   OPTIONAL,   -- Cond PUSCH-SCell
                uplinkPowerControlDedicated-r13
                                    UplinkPowerControlDedicatedSCell-v1310  OPTIONAL    -- Need ON
            }
        }                                                               OPTIONAL,   -- Need ON
        crossCarrierSchedulingConfig-r13
                        CrossCarrierSchedulingConfig-r13    OPTIONAL,   -- Cond Cross-Carrier-Config
        pdcch-ConfigSCell-r13           PDCCH-ConfigSCell-r13       OPTIONAL,       -- Need ON
        cqi-ReportConfig-v1310          CQI-ReportConfig-v1310      OPTIONAL,       -- Need ON
        pdsch-ConfigDedicated-v1310     PDSCH-ConfigDedicated-v1310 OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicated-v1310
                                SoundingRS-UL-ConfigDedicated-v1310 OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedUpPTsExt-r13
```


DAINGEAN_0002138

```
                        SoundingRS-UL-ConfigDedicatedUpPTsExt-r13   OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodic-v1310
                    SoundingRS-UL-ConfigDedicatedAperiodic-v1310    OPTIONAL,       -- Need ON
        soundingRS-UL-ConfigDedicatedAperiodicUpPTsExt-r13
                SoundingRS-UL-ConfigDedicatedAperiodicUpPTsExt-r13  OPTIONAL,       -- Need ON
        csi-RS-Config-v1310                 CSI-RS-Config-v1310         OPTIONAL,       -- Need ON
        laa-SCellConfiguration-r13          LAA-SCellConfiguration-r13  OPTIONAL,       -- Need ON
        csi-RS-ConfigNZPToAddModListExt-r13 CSI-RS-ConfigNZPToAddModListExt-r13 OPTIONAL,   -- Need
ON
        csi-RS-ConfigNZPToReleaseListExt-r13    CSI-RS-ConfigNZPToReleaseListExt-r13    OPTIONAL  --
Need ON
    ]],
    [[  cqi-ReportConfig-v1320                  CQI-ReportConfig-v1320  OPTIONAL        -- Need ON
    ]]
}

LAA-SCellConfiguration-r13 ::=          SEQUENCE {
    subframeStartPosition-r13               ENUMERATED {s0, s07},
    laa-SCellSubframeConfig-r13             BIT STRING (SIZE(8))
}

CSI-RS-ConfigNZPToAddModList-r11 ::=    SEQUENCE (SIZE (1..maxCSI-RS-NZP-r11)) OF CSI-RS-ConfigNZP-
r11

CSI-RS-ConfigNZPToAddModListExt-r13 ::= SEQUENCE (SIZE (1..maxCSI-RS-NZP-v1310)) OF CSI-RS-
ConfigNZP-r11

CSI-RS-ConfigNZPToReleaseList-r11 ::=   SEQUENCE (SIZE (1..maxCSI-RS-NZP-r11)) OF CSI-RS-
ConfigNZPId-r11

CSI-RS-ConfigNZPToReleaseListExt-r13 ::=    SEQUENCE (SIZE (1..maxCSI-RS-NZP-v1310)) OF CSI-RS-
ConfigNZPId-v1310

CSI-RS-ConfigZPToAddModList-r11 ::= SEQUENCE (SIZE (1..maxCSI-RS-ZP-r11)) OF CSI-RS-ConfigZP-r11

CSI-RS-ConfigZPToReleaseList-r11 ::=    SEQUENCE (SIZE (1..maxCSI-RS-ZP-r11)) OF CSI-RS-ConfigZPId-
r11

-- ASN1STOP
```


DAINGEAN_0002139

PhysicalConfigDedicated field descriptions
additionalSpectrumEmissionPCell E-UTRAN does not configure this field in this release of the specification.
antennaInfo A choice is used to indicate whether the *antennaInfo* is signalled explicitly or set to the default antenna configuration as specified in section 9.2.4.
ce-Mode Indicates the CE mode as specified in TS 36.213 [23].
csi-RS-Config For a serving frequency E-UTRAN does not configure *csi-RS-Config* (includes *zeroTxPowerCSI-RS*) when transmission mode 10 is configured for the serving cell on this carrier frequency.
csi-RS-ConfigNZPToAddModList For a serving frequency E-UTRAN configures one or more *CSI-RS-ConfigNZP* only when transmission mode 10 is configured for the serving cell on this carrier frequency. EUTRAN configures a maximum of one *CSI-RS-ConfigNZP* for a serving frequency on which the UE supports only one CSI process (i.e. *supportedCSI-Proc* is indicated as ***n1***).
csi-RS-ConfigZPToAddModList For a serving frequency E-UTRAN configures one or more *CSI-RS-ConfigZP* only when transmission mode 10 is configured for the serving cell on this carrier frequency.
eimta-MainConfigPCell, eimta-MainConfigSCell If E-UTRAN configures *eimta-MainConfigPCell* or *eimta-MainConfigSCell* for one serving cell in a frequency band, E-UTRAN configures *eimta-MainConfigPCell* or *eimta-MainConfigSCell* for all serving cells residing on the frequency band. E-UTRAN configures *eimta-MainConfigPCell* or *eimta-MainConfigSCell* only if *eimta-MainConfig* is configured.
epdcch-Config indicates the *EPDCCH-Config* for the cell. E-UTRAN does not configure *EPDCCH-Config* for an SCell that is configured with value *other* for *schedulingCellInfo* in *CrossCarrierSchedulingConfig*.
laa-SCellSubframeConfig A bit-map indicating LAA SCell subframe configuration, "1" denotes that the corresponding subframe is allocated as MBSFN subframe. The bitmap is interpreted as follows: Starting from the first/leftmost bit in the bitmap, the allocation applies to subframes #1, #2, #3 , #4, #6, #7, #8,and #9.
pdsch-ConfigDedicated-v1130 For a serving frequency E-UTRAN configures *pdsch-ConfigDedicated-v1130* only when transmission mode 10 is configured for the serving cell on this carrier frequency.
pdsch-ConfigDedicated-v1280 For a serving frequency E-UTRAN configures *pdsch-ConfigDedicated-v1280* only when transmission mode 9 or 10 is configured for the serving cell on this carrier frequency.
pucch-Cell If present, PUCCH feedback of this SCell is sent on the PUCCH SCell. If absent, PUCCH feedback of this SCell is sent on PCell or PSCell, or if the cell concerns the PUCCH SCell, on the concerned cell.
pucch-ConfigDedicated-r13 E-UTRAN configures *pucch-ConfigDedicated-r13* only if *pucch-ConfigDedicated* is not configured.
pusch-ConfigDedicated-r13 E-UTRAN configures *pusch-ConfigDedicated-r13* only if *pusch-ConfigDedicated* is not configured.
pusch-ConfigDedicated-v1250 E-UTRAN configures *pusch-ConfigDedicated-v1250* only if *tpc-SubframeSet* is configured.
subframeStartPosition Indicates possible starting positions of transmission in the first subframe of the DL transmission burst, see TS 36.211 [21].Value *s0* means the starting position is subframe boundary, *s07* means the starting position is either subfarme boundary or slot boundary.
tpc-PDCCH-ConfigPUCCH PDCCH configuration for power control of PUCCH using format 3/3A, see TS 36.212 [22].
tpc-PDCCH-ConfigPUSCH PDCCH configuration for power control of PUSCH using format 3/3A, see TS 36.212 [22].
uplinkPowerControlDedicated E-UTRAN configures *uplinkPowerControlDedicated-v1130* only if *uplinkPowerControlDedicated* (without suffix) is configured.
uplinkPowerControlDedicatedSCell E-UTRAN configures *uplinkPowerControlDedicatedSCell-v1130* only if *uplinkPowerControlDedicatedSCell-r10* is configured for this serving cell.

DAINGEAN_0002140

Conditional presence	Explanation
AI-r8	The field is optionally present, need ON, if *antennaInfoDedicated-r10* is absent. Otherwise the field is not present
AI-r10	The field is optionally present, need ON, if *antennaInfoDedicated* is absent. Otherwise the field is not present
CommonUL	The field is mandatory present if *ul-Configuration* of *RadioResourceConfigCommonSCell-r10* is present; otherwise it is optional, need ON.
CQI-r8	The field is optionally present, need ON, if *cqi-ReportConfig-r10* is absent. Otherwise the field is not present
CQI-r10	The field is optionally present, need ON, if *cqi-ReportConfig* is absent. Otherwise the field is not present
Cross-Carrier-Config	The field is optionally present, need ON, if *crossCarrierSchedulingConfig-r10* is absent. Otherwise the field is not present
PUCCH-SCell1	The field is optionally present, need OR, for SCell not configured with *pucch-configDedicated-r13*. Otherwise it is not present.
PUSCH-SCell	The field is optionally present, need ON, if *pusch-ConfigDedicatedSCell-r10 and pusch-ConfigDedicated-v1130* are absent. Otherwise the field is not present
PUSCH-SCell1	The field is optionally present, need ON, for SCell not configured with *pucch-configDedicated-r13*. Otherwise it is not present.
SCellAdd	The field is mandatory present if *cellIdentification* is present; otherwise it is optional, need ON.
UL-Power-SCell	The field is optionally present, need ON, if *uplinkPowerControlDedicatedSCell* is absent. Otherwise the field is not present

NOTE 1: During handover, the UE performs a MAC reset, which involves reverting to the default CQI/ SRS/ SR configuration in accordance with subclause 5.3.13 and TS 36.321 [6, 5.9 & 5.2]. Hence, for these parts of the dedicated radio resource configuration, the default configuration (rather than the configuration used in the source PCell) is used as the basis for the delta signalling that is included in the message used to perform handover.

NOTE 2: Since delta signalling is not supported for the common SCell configuration, E-UTRAN can only add or release the uplink of an SCell by releasing and adding the concerned SCell.

– *P-Max*

The IE *P-Max* is used to limit the UE's uplink transmission power on a carrier frequency and is used to calculate the parameter *Pcompensation* defined in TS 36.304 [4]. Corresponds to parameter P_{EMAX} or $P_{EMAX,c}$ in TS 36.101 [42]. The UE transmit power on one serving cell shall not exceed the configured maximum UE output power of the serving cell determined by this value as specified in TS 36.101 [42, 6.2.5 or 6.2.5A] or, when transmitting sidelink discovery announcements within the coverage of the concerned cell, as specified in TS 36.101 [42, 6.2.5D].

P-Max information element

```
-- ASN1START

P-Max ::=                INTEGER (-30..33)

-- ASN1STOP
```

– *PRACH-Config*

The IE *PRACH-ConfigSIB* and IE *PRACH-Config* are used to specify the PRACH configuration in the system information and in the mobility control information, respectively.

PRACH-Config information elements

```
-- ASN1START

PRACH-ConfigSIB ::=              SEQUENCE {
    rootSequenceIndex                    INTEGER (0..837),
    prach-ConfigInfo                     PRACH-ConfigInfo
}

PRACH-ConfigSIB-v1310 ::=            SEQUENCE {
    rsrp-ThresholdsPrachInfoList-r13        RSRP-ThresholdsPrachInfoList-r13,
```


DAINGEAN_0002141

```
    mpdcch-startSF-CSS-RA-r13           CHOICE {
        fdd-r13                             ENUMERATED {v1, v1dot5, v2, v2dot5, v4, v5, v8,
                                                v10},
        tdd-r13                             ENUMERATED {v1, v2, v4, v5, v8, v10, v20, spare}
    }                                                                       OPTIONAL,   --  Cond MP
    prach-HoppingOffset-r13             INTEGER (0..94)                     OPTIONAL,   -- Need OR
    prach-ParametersListCE-r13          PRACH-ParametersListCE-r13
}

PRACH-Config ::=                    SEQUENCE {
    rootSequenceIndex                   INTEGER (0..837),
    prach-ConfigInfo                    PRACH-ConfigInfo                    OPTIONAL    -- Need ON
}

PRACH-Config-v1310 ::=              SEQUENCE {
    rsrp-ThresholdsPrachInfoList-r13        RSRP-ThresholdsPrachInfoList-r13        OPTIONAL,   --
Cond HO
    mpdcch-startSF-CSS-RA-r13           CHOICE {
        fdd-r13                             ENUMERATED {v1, v1dot5, v2, v2dot5, v4, v5, v8,
                                                v10},
        tdd-r13                             ENUMERATED {v1, v2, v4, v5, v8, v10, v20, spare}
    }                                                                       OPTIONAL,   -- Cond MP
    prach-HoppingOffset-r13             INTEGER (0..94)                     OPTIONAL,   -- Need OR
    prach-ParametersListCE-r13          PRACH-ParametersListCE-r13          OPTIONAL,   -- Cond MP
    initial-CE-level-r13                    INTEGER (0..3)      OPTIONAL    -- Need OR
}

PRACH-ConfigSCell-r10 ::=           SEQUENCE {
    prach-ConfigIndex-r10               INTEGER (0..63)
}

PRACH-ConfigInfo ::=                SEQUENCE {
    prach-ConfigIndex                   INTEGER (0..63),
    highSpeedFlag                       BOOLEAN,
    zeroCorrelationZoneConfig           INTEGER (0..15),
    prach-FreqOffset                    INTEGER (0..94)
}

PRACH-ParametersListCE-r13 ::=  SEQUENCE (SIZE(1..maxCE-Level-r13)) OF PRACH-ParametersCE-r13

PRACH-ParametersCE-r13 ::=          SEQUENCE {
    prach-ConfigIndex-r13               INTEGER (0..63),
    prach-FreqOffset-r13                    INTEGER (0..94),
    prach-StartingSubframe-r13          ENUMERATED {sf2, sf4, sf8, sf16, sf32, sf64, sf128,
                                                sf256}                      OPTIONAL,   -- Need OP
    maxNumPreambleAttemptCE-r13
                                ENUMERATED {n3, n4, n5, n6, n7, n8, n10}    OPTIONAL,   -- Need OP
    numRepetitionPerPreambleAttempt-r13     ENUMERATED {n1,n2,n4,n8,n16,n32,n64,n128},
    mpdcch-NarrowbandsToMonitor-r13         SEQUENCE (SIZE(1..2)) OF
                                                INTEGER (1..maxAvailNarrowBands-r13),
    mpdcch-NumRepetition-RA-r13         ENUMERATED {r1, r2, r4, r8, r16,
                                                r32, r64, r128, r256},
    prach-HoppingConfig-r13             ENUMERATED {on,off}
}

RSRP-ThresholdsPrachInfoList-r13 ::= SEQUENCE (SIZE(1..3)) OF RSRP-Range

-- ASN1STOP
```


DAINGEAN_0002142

PRACH-Config field descriptions
initial-CE-level Indicates initial PRACH CE level at random access, see TS 36.321 [6]. If not configured, UE selects PRACH CE level based on measured RSRP level, see TS 36.321 [6].
highSpeedFlag Parameter: High-speed-flag, see TS 36.211 [21, 5.7.2]. TRUE corresponds to Restricted set and FALSE to Unrestricted set.
maxNumPreambleAttemptCE Maximum number of preamble transmission attempts per CE level. See TS 36.321 [6].
mpdcch-NarrowbandsToMonitor Narrowbands to monitor for MPDCCH for RAR, see TS 36.213 [23].
mpdcch-NumRepetition-RA Maximum number of repetitions for MPDCCH common search space (CSS) for RAR, Msg3 and Msg4, see TS 36.211 [21].
mpdcch-startSF-CSS-RA Starting subframe configuration for MPDCCH common search space (CSS), including RAR, Msg3 retransmission, PDSCH with contention resolution and PDSCH with *RRCConnectionSetup*, see TS 36.211 [21] and TS 36.213 [23]. Value v1 corresponds to 1, value v1dot5 corresponds to 1.5, and so on.
numRepetitionPerPreambleAttempt Number of PRACH repetitions per attempt for each CE level, See TS 36.211 [21].
prach-ConfigIndex Parameter: *prach-ConfigurationIndex*, see TS 36.211 [21, 5.7.1].
prach-FreqOffset Parameter: *prach-FrequencyOffset,* see TS 36.211 [21, 5.7.1]. For TDD the value range is dependent on the value of *prach-ConfigIndex*.
prach-HoppingConfig Coverage level specific frequency hopping configuration for PRACH.
prach-ParametersListCE Configures PRACH parameters for each CE level. The first entry in the list is the PRACH parameters of CE level 0, the second entry in the list is the PRACH parameters of CE level 1, and so on.
prach-StartingSubframe PRACH starting subframe periodicity, expressed in number of subframes available for preamble transmission (PRACH opportunities), see TS 36.211 [21]. Value sf2 corresponds to 2 subframes, sf4 corresponds to 4 subframes and so on. EUTRAN configures the PRACH starting subframe periodicity larger than or equal to the Number of PRACH repetitions per attempt for each CE level (*numRepetitionPerPreambleAttempt*).
rootSequenceIndex Parameter: *RACH_ROOT_SEQUENCE*, see TS 36.211 [21, 5.7.1].
rsrp-ThresholdsPrachInfoList The criterion for BL UEs and UEs in CE to select PRACH resource set. Up to 3 RSRP threshold values are signalled to determine the CE level for PRACH, see TS 36.213 [23]. The first element corresponds to RSRP threshold 1, the second element corresponds to RSRP threshold 2 and so on, see TS 36.321 [6].
zeroCorrelationZoneConfig Parameter: N_{CS} configuration, see TS 36.211 [21, 5.7.2: table 5.7.2-2] for preamble format 0..3 and TS 36.211 [21, 5.7.2: table 5.7.2-3] for preamble format 4.

Conditional presence	Explanation
HO	The field is mandatory present if *initial-CE-level-r13* is absent; otherwise it is optional, need OR.
MP	The field is mandatory present.

– *PresenceAntennaPort1*

The IE *PresenceAntennaPort1* is used to indicate whether all the neighbouring cells use Antenna Port 1. When set to *TRUE*, the UE may assume that at least two cell-specific antenna ports are used in all neighbouring cells.

***PresenceAntennaPort1* information element**

```
-- ASN1START

PresenceAntennaPort1 ::=                BOOLEAN

-- ASN1STOP
```


DAINGEAN_0002143

– PUCCH-Config

The IE *PUCCH-ConfigCommon* and IE *PUCCH-ConfigDedicated* are used to specify the common and the UE specific PUCCH configuration respectively.

PUCCH-Config information elements

```
-- ASN1START

PUCCH-ConfigCommon ::=              SEQUENCE {
    deltaPUCCH-Shift                    ENUMERATED {ds1, ds2, ds3},
    nRB-CQI                             INTEGER (0..98),
    nCS-AN                              INTEGER (0..7),
    n1PUCCH-AN                          INTEGER (0..2047)
}

PUCCH-ConfigCommon-v1310 ::=        SEQUENCE {
    n1PUCCH-AN-InfoList-r13                 N1PUCCH-AN-InfoList-r13         OPTIONAL,   -- Need OR
    pucch-NumRepetitionCE-Msg4-Level0-r13   ENUMERATED {n1, n2, n4, n8}     OPTIONAL,   -- Need OR
    pucch-NumRepetitionCE-Msg4-Level1-r13   ENUMERATED {n1, n2, n4, n8}     OPTIONAL,   -- Need OR
    pucch-NumRepetitionCE-Msg4-Level2-r13   ENUMERATED {n4, n8, n16, n32}   OPTIONAL,   -- Need OR
    pucch-NumRepetitionCE-Msg4-Level3-r13   ENUMERATED {n4, n8, n16, n32}   OPTIONAL    -- Need OR
}

PUCCH-ConfigDedicated ::=           SEQUENCE {
    ackNackRepetition                   CHOICE{
        release                             NULL,
        setup                               SEQUENCE {
            repetitionFactor                    ENUMERATED {n2, n4, n6, spare1},
            n1PUCCH-AN-Rep                      INTEGER (0..2047)
        }
    },
    tdd-AckNackFeedbackMode             ENUMERATED {bundling, multiplexing} OPTIONAL    -- Cond TDD
}

PUCCH-ConfigDedicated-v1020 ::=     SEQUENCE {
    pucch-Format-r10                    CHOICE {
        format3-r10                         SEQUENCE {
            n3PUCCH-AN-List-r10 SEQUENCE (SIZE (1..4)) OF INTEGER (0..549)  OPTIONAL,   -- Need ON
            twoAntennaPortActivatedPUCCH-Format3-r10        CHOICE {
                release                                         NULL,
                setup                                           SEQUENCE {
                    n3PUCCH-AN-ListP1-r10   SEQUENCE (SIZE (1..4)) OF INTEGER (0..549)
                }
            }                                                               OPTIONAL    -- Need ON
        },
        channelSelection-r10                SEQUENCE {
            n1PUCCH-AN-CS-r10                   CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    n1PUCCH-AN-CS-List-r10              SEQUENCE (SIZE (1..2)) OF N1PUCCH-AN-CS-r10
                }
            }                                                               OPTIONAL    -- Need ON
        }
    }                                                                       OPTIONAL,   -- Need OR
    twoAntennaPortActivatedPUCCH-Format1a1b-r10     ENUMERATED {true}       OPTIONAL,   -- Need OR
    simultaneousPUCCH-PUSCH-r10                     ENUMERATED {true}       OPTIONAL,   -- Need OR
    n1PUCCH-AN-RepP1-r10                            INTEGER (0..2047)       OPTIONAL    -- Need OR
}

PUCCH-ConfigDedicated-v1130 ::=     SEQUENCE {
    n1PUCCH-AN-CS-v1130                 CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            n1PUCCH-AN-CS-ListP1-r11            SEQUENCE (SIZE (2..4)) OF INTEGER (0..2047)
        }
    }                                                                       OPTIONAL,   -- Need ON
    nPUCCH-Param-r11                    CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nPUCCH-Identity-r11                 INTEGER (0..503),
            n1PUCCH-AN-r11                      INTEGER (0..2047)
        }
    }                                                                       OPTIONAL    -- Need ON
}

PUCCH-ConfigDedicated-v1250 ::=     SEQUENCE {
```


DAINGEAN_0002144

```
    nkaPUCCH-Param-r12                  CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nkaPUCCH-AN-r12                     INTEGER (0..2047)
        }
    }
}

PUCCH-ConfigDedicated-r13 ::=       SEQUENCE {
--Release 8
    ackNackRepetition-r13               CHOICE{
        release                             NULL,
        setup                               SEQUENCE {
            repetitionFactor-r13                ENUMERATED {n2, n4, n6, spare1},
            n1PUCCH-AN-Rep-r13                  INTEGER (0..2047)
        }
    },
    tdd-AckNackFeedbackMode-r13         ENUMERATED {bundling, multiplexing} OPTIONAL,   -- Cond TDD
--Release 10
    pucch-Format-r13                    CHOICE {
        format3-r13                             SEQUENCE {
            n3PUCCH-AN-List-r13 SEQUENCE (SIZE (1..4)) OF INTEGER (0..549)  OPTIONAL,   -- Need ON
            twoAntennaPortActivatedPUCCH-Format3-r13        CHOICE {
                release                                         NULL,
                setup                                           SEQUENCE {
                    n3PUCCH-AN-ListP1-r13   SEQUENCE (SIZE (1..4)) OF INTEGER (0..549)
                }
            }                                                                   OPTIONAL    -- Need ON
        },
        channelSelection-r13                SEQUENCE {
            n1PUCCH-AN-CS-r13                   CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    n1PUCCH-AN-CS-List-r13              SEQUENCE (SIZE (1..2)) OF N1PUCCH-AN-CS-r10,
                    n1PUCCH-AN-CS-ListP1-r13            SEQUENCE (SIZE (2..4)) OF INTEGER (0..2047)
                }
            }                                                                   OPTIONAL    -- Need ON
        },
        format4-r13                         SEQUENCE {
            format4-resourceConfiguration-r13           SEQUENCE (SIZE (4)) OF Format4-resource-r13,
            format4-MultiCSI-resourceConfiguration-r13  SEQUENCE (SIZE (1..2)) OF Format4-resource-
r13 OPTIONAL    -- Need OR
        },
        format5-r13             SEQUENCE {
            format5-resourceConfiguration-r13           SEQUENCE (SIZE (4)) OF Format5-resource-r13,
            format5-MultiCSI-resourceConfiguration-r13  Format5-resource-r13 OPTIONAL   -- Need OR
        }
    }                                                                           OPTIONAL,   -- Need OR
    twoAntennaPortActivatedPUCCH-Format1a1b-r13     ENUMERATED {true}           OPTIONAL,   -- Need OR
    simultaneousPUCCH-PUSCH-r13                     ENUMERATED {true}           OPTIONAL,   -- Need OR
    n1PUCCH-AN-RepP1-r13                            INTEGER (0..2047)           OPTIONAL,   -- Need OR
--Release 11
    nPUCCH-Param-r13                    CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nPUCCH-Identity-r13                 INTEGER (0..503),
            n1PUCCH-AN-r13                      INTEGER (0..2047)
        }
    }                                                                           OPTIONAL,   -- Need ON
--Release 12
    nkaPUCCH-Param-r13                  CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nkaPUCCH-AN-r13                     INTEGER (0..2047)
        }
    }                                                                           OPTIONAL,   -- Need ON
--Release 13
    spatialBundlingPUCCH-r13            BOOLEAN,
    spatialBundlingPUSCH-r13            BOOLEAN,
    harq-TimingTDD-r13                  BOOLEAN,
    codebooksizeDetermination-r13       ENUMERATED {dai,cc}                     OPTIONAL,   -- Need OR
    maximumPayloadCoderate-r13          INTEGER (0..7)                          OPTIONAL,   -- Need OR
    pucch-NumRepetitionCE-r13           CHOICE {
        release                         NULL,
        setup                           CHOICE {
            modeA                           SEQUENCE {
                pucch-NumRepetitionCE-format1-r13               ENUMERATED {r1, r2, r4, r8},
                pucch-NumRepetitionCE-format2-r13               ENUMERATED {r1, r2, r4, r8}
```


DAINGEAN_0002145

```
            },
            modeB                           SEQUENCE {
                pucch-NumRepetitionCE-format1-r13                ENUMERATED {r4, r8, r16, r32},
                pucch-NumRepetitionCE-format2-r13                ENUMERATED {r4, r8, r16, r32}
            }
        }
    }                                                                    OPTIONAL    --Need ON
}

Format4-resource-r13    ::=             SEQUENCE {
    startingPRB-format4-r13                     INTEGER (0..109),
    numberOfPRB-format4-r13                     INTEGER (0..7)
}

Format5-resource-r13    ::=             SEQUENCE {
    startingPRB-format5-r13                     INTEGER (0..109),
    cdm-index-format5-r13                       INTEGER (0..1)
}


N1PUCCH-AN-CS-r10   ::= SEQUENCE (SIZE (1..4)) OF INTEGER (0..2047)

N1PUCCH-AN-InfoList-r13 ::= SEQUENCE (SIZE(1..maxCE-Level-r13)) OF INTEGER (0..2047)

-- ASN1STOP
```


DAINGEAN_0002146

PUCCH-Config field descriptions

ackNackRepetition
Parameter indicates whether ACK/NACK repetition is configured, see TS 36.213 [23, 10.1].

cdm-index-format5
Parameter n_{oc} see TS 36.211 [21, 5.4.2c] for determining PUCCH resource(s) of PUCCH format 5.

codebooksizeDetermination
Parameter indicates whether HARQ codebook size is determined with downlink assignment indicator based solution or number of configured CCs, see TS 36.212 [22, 5.2.2.6, 5.2.3.1 and 5.3.3.1.2] and TS 36.213 [23, 10.1.2.2.3, 10.1.3.2.3, 10.1.3.2.3.1, 10.1.3.2.3.2 and 10.1.3.2.4].

deltaPUCCH-Shift
Parameter: $\Delta_{\text{shift}}^{\text{PUCCH}}$, see TS 36.211 [21, 5.4.1], where ds1 corresponds to value 1, ds2 corresponds to value 2 etc.

harq-TimingTDD
Parameter indicates for a TDD SCell when aggregated with a TDD PCell of different UL/DL configurations whether deriving the HARQ timing for such a cell is done in the same way as the DL HARQ timing of an FDD SCell with a TDD PCell, see TS 36.213 [23, 10.2].

maximumPayloadCoderate
Maximum payload or code rate for multi P-CSI on each PUCCH resource, see TS 36.213 [23,10.1.1].

n1PUCCH-AN
Parameter: $N_{PUCCH}^{(1)}$, see TS 36.213 [23, 10.1].
n1PUCCH-AN-r11 indicates UE-specific PUCCH AN resource offset, see TS 36.213 [23, 10.1].

n1PUCCH-AN-CS-List
Parameter: $n_{\text{PUCCH},j}^{(1)}$ for antenna port p_0 for PUCCH format 1b with channel selection, see TS 36.213 [23, 10.1.2.2.1, 10.1.3.2.1].

n1PUCCH-AN-CS-ListP1
Parameter: $n_{\text{PUCCH},j}^{(1,\tilde{p}_1)}$ for antenna port p_1 for PUCCH format 1b with channel selection, see TS 36.213 [23, 10.1]. E-UTRAN configures this field only when *pucch-Format* is set to *channelSelection*.

n1PUCCH-AN-Rep, n1PUCCH-AN-RepP1
Parameter: $n_{\text{PUCCH, ANRep}}^{(1,p)}$ for antenna port P0 and for antenna port P1 respectively, see TS 36.213 [23, 10.1].

n3PUCCH-AN-List, n3PUCCH-AN-ListP1
Parameter: $n_{\text{PUCCH}}^{(3,p)}$ for antenna port P0 and for antenna port P1 respectively, see TS 36.213 [23, 10.1].

nCS-An
Parameter: $N_{cs}^{(1)}$ see TS 36.211 [21, 5.4].

nkaPUCCH-AN
Parameter: $N_{\text{PUCCH}}^{\text{K}_\text{A}}$, see TS 36.213 [23, 10.1.3].
nkaPUCCH-AN-r12 indicates PUCCH format 1a/1b starting offset for the subframe set K^A, see TS 36.213 [23, 10.1.3]. E-UTRAN configures *nkaPUCCH-AN* only if *eimta-MainConfig* is configured.

nPUCCH-Identity
Parameter: $n_{\text{ID}}^{\text{PUCCH}}$, see TS 36.211 [21, 5.5.1.5].

nRB-CQI
Parameter: $N_{\text{RB}}^{(2)}$, see TS 36.211 [21, 5.4].

numberOfPRB-format4
Parameter $n_{PUCCH}^{(4)}$ see TS 36.213 [23, Table 10.1.1-2] for determining PUCCH resource(s) of PUCCH format 4.

n1PUCCH-AN-InfoList
Starting offsets of the PUCCH resource(s) indicated by SIB1-BR. The first entry in the list is the starting offset of the PUCCH resource(s) of CE level 0, the second entry in the list is the starting offset of the PUCCH resource(s) of CE level 1, and so on. If E-UTRAN includes *n1PUCCH-AN-InfoList*, it includes the same number of entries as in *prach-ParametersListCE*. See TS 36.213 [23].

pucch-Format
Parameter indicates one of the PUCCH formats for transmission of HARQ-ACK, see TS 36.213 [23, 10.1]. For TDD, if the UE is configured with PCell only, the *channelSelection* indicates the transmission of HARQ-ACK multiplexing as defined in Tables 10.1.3-5, 10.1.3-6, and 10.1.3-7 in TS 36.213 [23] for PUCCH, and in 7.3 in TS 36.213 [23] for PUSCH.

pucch-NumRepetitionCE
Number of PUCCH repetitions for PUCCH format 1/1a and for PUCCH format 2/2a/2b for CE modes A and B, see TS 36.211 [21] and TS 36.213 [23]. EUTRAN does not configure *pucch-NumRepetitionCE-format2-r13* for CE mode B in this release of specification.

DAINGEAN_0002147

PUCCH-Config field descriptions
pucch-NumRepetitionCE-Msg4-Level0, pucch-NumRepetitionCE-Msg4-Level1, pucch-NumRepetitionCE-Msg4-Level2, pucch-NumRepetitionCE-Msg4-Level3 Number of repetitions for PUCCH carrying HARQ response to PDSCH containing Msg4 for PRACH CE levels 0, 1, 2 and 3, see TS 36.211 [21] and TS 36.213 [23]. Value n1 corresponds to 1 repetition, value n2 corresponds to 2 repetitions, and so on.
repetitionFactor Parameter N_{ANRep} see TS 36.213 [23, 10.1] where n2 corresponds to repetition factor 2, n4 to 4.
simultaneousPUCCH-PUSCH Parameter indicates whether simultaneous PUCCH and PUSCH transmissions is configured, see TS 36.213 [23, 10.1 and 5.1.1]. E-UTRAN configures this field for the PCell, only when the *nonContiguousUL-RA-WithinCC-Info* is set to *supported* in the band on which PCell is configured. Likewise, E-UTRAN configures this field for the PSCell, only when the *nonContiguousUL-RA-WithinCC-Info* is set to *supported* in the band on which PSCell is configured. Likewise, E-UTRAN configures this field for the PUCCH SCell, only when the *nonContiguousUL-RA-WithinCC-Info* is set to *supported* in the band on which PUCCH SCell is configured.
spatialBundlingPUCCH Parameter indicates whether spatial bundling is enabled or not for PUCCH, see TS 36.212 [22, 5.2.3.1].
spatialBundlingPUSCH Parameter indicates whether spatial bundling is enabled or not for PUSCH, see see TS 36.212 [22, 5.2.2.6].
startingPRB-format4 Parameter $n_{PUCCH}^{(4)}$ see TS 36.211 [21, 5.4.3] for determining PUCCH resource(s) of PUCCH format 4.
startingPRB-format5 Parameter $n_{\text{PUCCH}}^{(5)}$ see TS 36.211 [21, 5.4.3] for determining PUCCH resource(s) of PUCCH format 5.
tdd-AckNackFeedbackMode Parameter indicates one of the TDD ACK/NACK feedback modes used, see TS 36.213 [23, 7.3 and 10.1.3]. The value bundling corresponds to use of ACK/NACK bundling whereas, the value multiplexing corresponds to ACK/NACK multiplexing as defined in Tables 10.1.3-2, 10.1.3-3, and 10.1.3-4 in TS 36.213 [23]. The same value applies to both ACK/NACK feedback modes on PUCCH as well as on PUSCH.
twoAntennaPortActivatedPUCCH-Format1a1b Indicates whether two antenna ports are configured for PUCCH format 1a/1b for HARQ-ACK, see TS 36.213 [23, 10.1]. The field also applies for PUCCH format 1a/1b transmission when *format3* is configured, see TS 36.213 [23, 10.1.2.2.2, 10.1.3.2.2].
twoAntennaPortActivatedPUCCH-Format3 Indicates whether two antenna ports are configured for PUCCH format 3 for HARQ-ACK, see TS 36.213 [23, 10.1].

Conditional presence	Explanation
TDD	The field is mandatory present for TDD if the *pucch-Format* is not present. If the *pucch-Format* is present, the field is not present and the UE shall delete any existing value for this field. It is not present for FDD and the UE shall delete any existing value for this field.

– *PUSCH-Config*

The IE *PUSCH-ConfigCommon* is used to specify the common PUSCH configuration and the reference signal configuration for PUSCH and PUCCH. The IE *PUSCH-ConfigDedicated* is used to specify the UE specific PUSCH configuration.

***PUSCH-Config* information element**

```
-- ASN1START

PUSCH-ConfigCommon ::=              SEQUENCE {
    pusch-ConfigBasic                   SEQUENCE {
        n-SB                                INTEGER (1..4),
        hoppingMode                         ENUMERATED {interSubFrame, intraAndInterSubFrame},
        pusch-HoppingOffset                 INTEGER (0..98),
        enable64QAM                         BOOLEAN
    },
    ul-ReferenceSignalsPUSCH            UL-ReferenceSignalsPUSCH
}

PUSCH-ConfigCommon-v1270 ::=        SEQUENCE {
    enable64QAM-v1270                   ENUMERATED {true}
}
```


DAINGEAN_0002148

```
PUSCH-ConfigCommon-v1310 ::=    SEQUENCE {
    pusch-maxNumRepetitionCEmodeA-r13   ENUMERATED {
                                            r8, r16, r32 }                  OPTIONAL,   -- Need OR
    pusch-maxNumRepetitionCEmodeB-r13   ENUMERATED {
                                            r192, r256, r384, r512, r768, r1024,
                                            r1536, r2048}                   OPTIONAL,   -- Need OR
    pusch-HoppingOffset-v1310
                                    INTEGER (1..maxAvailNarrowBands-r13)    OPTIONAL    -- Need OR
}

PUSCH-ConfigDedicated ::=           SEQUENCE {
    betaOffset-ACK-Index                INTEGER (0..15),
    betaOffset-RI-Index                 INTEGER (0..15),
    betaOffset-CQI-Index                INTEGER (0..15)
}

PUSCH-ConfigDedicated-v1020 ::=     SEQUENCE {
    betaOffsetMC-r10                    SEQUENCE {
        betaOffset-ACK-Index-MC-r10         INTEGER (0..15),
        betaOffset-RI-Index-MC-r10          INTEGER (0..15),
        betaOffset-CQI-Index-MC-r10         INTEGER (0..15)
    }                                                                       OPTIONAL,   -- Need OR
    groupHoppingDisabled-r10            ENUMERATED {true}                   OPTIONAL,   -- Need OR
    dmrs-WithOCC-Activated-r10          ENUMERATED {true}                   OPTIONAL    -- Need OR
}

PUSCH-ConfigDedicated-v1130 ::=     SEQUENCE {
    pusch-DMRS-r11                      CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nPUSCH-Identity-r11                 INTEGER (0..509),
            nDMRS-CSH-Identity-r11              INTEGER (0..509)
        }
    }
}

PUSCH-ConfigDedicated-v1250::=      SEQUENCE {
    uciOnPUSCH                          CHOICE {
        release                             NULL,
        setup                                   SEQUENCE {
            betaOffset-ACK-Index-SubframeSet2-r12           INTEGER (0..15),
            betaOffset-RI-Index-SubframeSet2-r12            INTEGER (0..15),
            betaOffset-CQI-Index-SubframeSet2-r12           INTEGER (0..15),
            betaOffsetMC-r12                            SEQUENCE {
                betaOffset-ACK-Index-MC-SubframeSet2-r12    INTEGER (0..15),
                betaOffset-RI-Index-MC-SubframeSet2-r12     INTEGER (0..15),
                betaOffset-CQI-Index-MC-SubframeSet2-r12    INTEGER (0..15)
            }                                                               OPTIONAL    -- Need OR
        }
    }
}
PUSCH-ConfigDedicated-r13 ::=           SEQUENCE {
    betaOffset-ACK-Index-r13            INTEGER (0..15),
    betaOffset2-ACK-Index-r13           INTEGER (0..15)                     OPTIONAL,   -- Need OR
    betaOffset-RI-Index-r13             INTEGER (0..15),
    betaOffset-CQI-Index-r13            INTEGER (0..15),
    betaOffsetMC-r13                    SEQUENCE {
        betaOffset-ACK-Index-MC-r13         INTEGER (0..15),
        betaOffset2-ACK-Index-MC-r13        INTEGER (0..15)                 OPTIONAL,   -- Need OR
        betaOffset-RI-Index-MC-r13          INTEGER (0..15),
        betaOffset-CQI-Index-MC-r13         INTEGER (0..15)
    }                                                                       OPTIONAL,   -- Need OR
    groupHoppingDisabled-r13            ENUMERATED {true}                   OPTIONAL,   -- Need OR
    dmrs-WithOCC-Activated-r13          ENUMERATED {true}                   OPTIONAL,   -- Need OR
    pusch-DMRS-r11                      CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            nPUSCH-Identity-r13                 INTEGER (0..509),
            nDMRS-CSH-Identity-r13              INTEGER (0..509)
        }
    }                                                                       OPTIONAL,   -- Need ON
    uciOnPUSCH                          CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            betaOffset-ACK-Index-SubframeSet2-r13           INTEGER (0..15),
            betaOffset2-ACK-Index-SubframeSet2-r13          INTEGER (0..15) OPTIONAL,   -- Need OR
            betaOffset-RI-Index-SubframeSet2-r13            INTEGER (0..15),
            betaOffset-CQI-Index-SubframeSet2-r13           INTEGER (0..15),
```


DAINGEAN_0002149

```
            betaOffsetMC-r12                        SEQUENCE {
                betaOffset-ACK-Index-MC-SubframeSet2-r13    INTEGER (0..15),
                betaOffset2-ACK-Index-MC-SubframeSet2-r13   INTEGER (0..15) OPTIONAL,   -- Need OR
                betaOffset-RI-Index-MC-SubframeSet2-r13     INTEGER (0..15),
                betaOffset-CQI-Index-MC-SubframeSet2-r13    INTEGER (0..15)
            }                                                                   OPTIONAL    -- Need OR
        }
    }                                                                           OPTIONAL,   -- Need ON
    pusch-HoppingConfig-r13                 ENUMERATED {on}                     OPTIONAL    -- Need OR
}

PUSCH-ConfigDedicatedSCell-r10 ::=      SEQUENCE {
    groupHoppingDisabled-r10                ENUMERATED {true}                   OPTIONAL,   -- Need OR
    dmrs-WithOCC-Activated-r10              ENUMERATED {true}                   OPTIONAL    -- Need OR
}

UL-ReferenceSignalsPUSCH ::=        SEQUENCE {
    groupHoppingEnabled                 BOOLEAN,
    groupAssignmentPUSCH                INTEGER (0..29),
    sequenceHoppingEnabled              BOOLEAN,
    cyclicShift                         INTEGER (0..7)
}

-- ASN1STOP
```


DAINGEAN_0002150

PUSCH-Config field descriptions

betaOffset-ACK-Index, betaOffset2-ACK-Index, betaOffset-ACK-Index-MC, betaOffset2-ACK-Index-MC

Parameter: $I_{offset}^{HARQ-ACK}$, $I_{offset,X}^{HARQ-ACK}$, $I_{offset,MC}^{HARQ-ACK}$ and $I_{offset,MC,X}^{HARQ-ACK}$, for single- and multiple-codeword respectively, see TS 36.213 [23, Table 8.6.3-1]. *betaOffset-ACK-Index* and *betaOffset2-ACK-Index* are used for single-codeword and *betaOffset-ACK-Index-MC* and *betaOffset2-ACK-Index-MC* are used for multiple-codeword. If *betaOffset2-ACK-Index* is configured; *betaOffset-ACK-Index* is used when up to 22 HARQ-ACK bits are transmitted otherwise *betaOffset2-ACK-Index* is used. If *betaOffset-ACK2-Index-MC* is configured; *betaOffset-ACK-Index-MC* is used when up to 22 HARQ-ACK bits are transmitted otherwise *betaOffset2-ACK-Index-MC* is used. One value applies for all serving cells with an uplink and not configured with uplink power control subframe sets. The same value also applies for subframe set 1 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell).

betaOffset-ACK-Index-SubframeSet2, betaOffset2-ACK-Index-SubframeSet2, betaOffset-ACK-Index-MC-SubframeSet2, betaOffset2-ACK-Index-MC-SubframeSet2

Parameter: $I_{offset,set2}^{HARQ-ACK}$, $I_{offset,set2,X}^{HARQ-ACK}$, $I_{offset,MC,set2}^{HARQ-ACK}$ and $I_{offset,MC,set2,X}^{HARQ-ACK}$ respectively, see TS 36.213 [23, Table 8.6.3-1]. *betaOffset-ACK-Index-SubframeSet2* and *betaOffset2-ACK-Index-SubframeSet2* are used for single-codeword, *betaOffset-ACK-Index-MC-SubframeSet2*, *betaOffset2-ACK-Index-MC-SubframeSet2* are used for multiple-codeword. If *betaOffset2-ACK-Index-SubframeSet2* is configured; *betaOffset-ACK-Index-SubframeSet2* is used when up to 22 HARQ-ACK bits are transmitted otherwise *betaOffset2-ACK-Index-SubframeSet2* is used. If *betaOffset2-ACK-Index-MC-SubframeSet2* is configured; *betaOffset-ACK-Index-MC-SubframeSet2* is used when up to 22 HARQ-ACK bits are transmitted otherwise *betaOffset2-ACK-Index-MC-SubframeSet2* is used. One value applies for subframe set 2 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell configured with uplink power control subframe sets).

betaOffset-CQI-Index, betaOffset-CQI-Index-MC

Parameter: I_{offset}^{CQI}, for single- and multiple-codeword respectively, see TS 36.213 [23, Table 8.6.3-3]. One value applies for all serving cells with an uplink and not configured with uplink power control subframe sets. The same value also applies for subframe set 1 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell).

betaOffset-CQI-Index-SubframeSet2, betaOffset-CQI-Index-MC-SubframeSet2

Parameter: I_{offset}^{CQI}, for single- and multiple-codeword respectively, see TS 36.213 [23, Table 8.6.3-3]. One value applies for subframe set 2 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell configured with uplink power control subframe sets).

betaOffset-RI-Index, betaOffset-RI-Index-MC

Parameter: I_{offset}^{RI}, for single- and multiple-codeword respectively, see TS 36.213 [23, Table 8.6.3-2]. One value applies for all serving cells with an uplink and not configured with uplink power control subframe sets. The same value also applies for subframe set 1 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell).

betaOffset-RI-Index-SubframeSet2, betaOffset-RI-Index-MC-SubframeSet2

Parameter: I_{offset}^{RI}, for single- and multiple-codeword respectively, see TS 36.213 [23, Table 8.6.3-2]. One value applies for subframe set 2 of all serving cells with an uplink and configured with uplink power control subframe sets (the associated functionality is common i.e. not performed independently for each cell configured with uplink power control subframe sets).

cyclicShift

Parameters: *cyclicShift*, see TS 36.211 [21, Table 5.5.2.1.1-2].

dmrs-WithOCC-Activated

Parameter: *Activate-DMRS-with OCC*, see TS 36.211 [21, 5.5.2.1].

enable64QAM

See TS 36.213 [23, 8.6.1]. If *enable64QAM* (without suffix) is set to TRUE, it indicates that 64QAM is allowed for UE categories 5 and 8 indicated in *ue-Category* while FALSE indicates that 64QAM is not allowed. If *enable64QAM-v1270* is set to TRUE, it indicates that 64QAM is allowed for UL categories 5, 8, 13 and 14 indicated in *ue-CategoryUL*. E-UTRAN configures *enable64QAM-v1270* only when *enable64QAM* (without suffix) is set to TRUE.

groupAssignmentPUSCH

Parameter: *ΔSS* See TS 36.211 [21, 5.5.1.3].

groupHoppingDisabled

Parameter: *Disable-sequence-group-hopping*, see TS 36.211 [21, 5.5.1.3].

groupHoppingEnabled

Parameter: *Group-hopping-enabled*, see TS 36.211 [21, 5.5.1.3].

hoppingMode

Parameter: *Hopping-mode*, see TS 36.211 [21, 5.3.4].

nDMRS-CSH-Identity

Parameter: $N_{\mathrm{ID}}^{\mathrm{csh\_DMRS}}$, see TS 36.211 [21, 5.5.2.1.1].

DAINGEAN_0002151

***PUSCH-Config* field descriptions**
nPUSCH-Identity
Parameter: n_{ID}^{PUSCH}, see TS 36.211 [21, 5.5.1.5].
n-SB
Parameter: N_{sb} see TS 36.211 [21, 5.3.4].
pusch-HoppingConfig
For BL UEs and UEs in CE, frequency hopping activation/deactivation for unicast PUSCH, see TS 36.211 [21]
pusch-hoppingOffset
Parameter: N_{RB}^{HO}, see TS 36.211 [21, 5.3.4].
pusch-maxNumRepetitionCEmodeA
Maximum value to indicate the set of PUSCH repetition numbers for CE mode A, see TS 36.211 [21] and TS 36.213 [23].
pusch-maxNumRepetitionCEmodeB
Maximum value to indicate the set of PUSCH repetition numbers for CE mode B, see TS 36.211 [21] and TS 36.213 [23].
sequenceHoppingEnabled
Parameter: *Sequence-hopping-enabled*, see TS 36.211 [21, 5.5.1.4].
ul-ReferenceSignalsPUSCH
Used to specify parameters needed for the transmission on PUSCH (or PUCCH).

– *RACH-ConfigCommon*

The IE *RACH-ConfigCommon* is used to specify the generic random access parameters.

***RACH-ConfigCommon* information element**

```
-- ASN1START

RACH-ConfigCommon ::=           SEQUENCE {
    preambleInfo                            SEQUENCE {
        numberOfRA-Preambles                    ENUMERATED {
                                                    n4, n8, n12, n16 ,n20, n24, n28,
                                                    n32, n36, n40, n44, n48, n52, n56,
                                                    n60, n64},
        preamblesGroupAConfig                   SEQUENCE {
            sizeOfRA-PreamblesGroupA                ENUMERATED {
                                                        n4, n8, n12, n16 ,n20, n24, n28,
                                                        n32, n36, n40, n44, n48, n52, n56,
                                                        n60},
            messageSizeGroupA                       ENUMERATED {b56, b144, b208, b256},
            messagePowerOffsetGroupB                ENUMERATED {
                                                        minusinfinity, dB0, dB5, dB8, dB10, dB12,
                                                        dB15, dB18},
            ...
        }               OPTIONAL                                                    -- Need OP
    },
    powerRampingParameters              PowerRampingParameters,
    ra-SupervisionInfo                  SEQUENCE {
        preambleTransMax                    PreambleTransMax,
        ra-ResponseWindowSize               ENUMERATED {
                                                sf2, sf3, sf4, sf5, sf6, sf7,
                                                sf8, sf10},
        mac-ContentionResolutionTimer       ENUMERATED {
                                                sf8, sf16, sf24, sf32, sf40, sf48,
                                                sf56, sf64}
    },
    maxHARQ-Msg3Tx                      INTEGER (1..8),
    ...,
    [[  preambleTransMax-CE-r13         PreambleTransMax                    OPTIONAL,   -- Need OR
        rach-CE-LevelInfoList-r13       RACH-CE-LevelInfoList-r13           OPTIONAL    -- Need OR
    ]]
}

RACH-ConfigCommon-v1250 ::=     SEQUENCE {
    txFailParams-r12                SEQUENCE {
        connEstFailCount-r12                ENUMERATED {n1, n2, n3, n4},
        connEstFailOffsetValidity-r12       ENUMERATED {s30, s60, s120, s240,
                                                        s300, s420, s600, s900},
        connEstFailOffset-r12               INTEGER (0..15)     OPTIONAL    -- Need OP
    }
```


DAINGEAN_0002152

```
}

RACH-ConfigCommonSCell-r11 ::=      SEQUENCE {
    powerRampingParameters-r11              PowerRampingParameters,
    ra-SupervisionInfo-r11                  SEQUENCE {
        preambleTransMax-r11                    PreambleTransMax
    },
    ...
}

RACH-CE-LevelInfoList-r13 ::=   SEQUENCE (SIZE (1..maxCE-Level-r13)) OF RACH-CE-LevelInfo-r13

RACH-CE-LevelInfo-r13 ::=       SEQUENCE {
    preambleMappingInfo-r13             SEQUENCE {
        firstPreamble-r13                   INTEGER(0..63),
        lastPreamble-r13                    INTEGER(0..63)
    },
    ra-ResponseWindowSize-r13           ENUMERATED {sf20, sf50, sf80, sf120, sf180,
                                                    sf240, sf320, sf400},

    mac-ContentionResolutionTimer-r13   ENUMERATED {sf80, sf100, sf120,
                                                    sf160, sf200, sf240, sf480, sf960},
    rar-HoppingConfig-r13               ENUMERATED {on,off},
    ...
}

PowerRampingParameters ::=          SEQUENCE {
    powerRampingStep                    ENUMERATED {dB0, dB2,dB4, dB6},
    preambleInitialReceivedTargetPower  ENUMERATED {
                                            dBm-120, dBm-118, dBm-116, dBm-114, dBm-112,
                                            dBm-110, dBm-108, dBm-106, dBm-104, dBm-102,
                                            dBm-100, dBm-98, dBm-96, dBm-94,
                                            dBm-92, dBm-90}
}

PreambleTransMax ::=                ENUMERATED {
                                            n3, n4, n5, n6, n7, n8, n10, n20, n50,
                                            n100, n200}

-- ASN1STOP
```


DAINGEAN_0002153

RACH-ConfigCommon field descriptions
connEstFailCount Number of times that the UE detects T300 expiry on the same cell before applying *connEstFailOffset*.
connEstFailOffset Parameter "$Qoffset_{temp}$" in TS 36.304 [4]. If the field is not present the value of infinity shall be used for "$Qoffset_{temp}$".
connEstFailOffsetValidity Amount of time that the UE applies *connEstFailOffset* before removing the offset from evaluation of the cell. Value s30 corresponds to 30 seconds, s60 corresponds to 60 seconds, and so on.
mac-ContentionResolutionTimer Timer for contention resolution in TS 36.321 [6]. Value in subframes. Value sf8 corresponds to 8 subframes, sf16 corresponds to 16 subframes and so on.
maxHARQ-Msg3Tx Maximum number of Msg3 HARQ transmissions in TS 36.321 [6], used for contention based random access. Value is an integer.
messagePowerOffsetGroupB Threshold for preamble selection in TS 36.321 [6]. Value in dB. Value minusinfinity corresponds to –infinity. Value dB0 corresponds to 0 dB, dB5 corresponds to 5 dB and so on.
messageSizeGroupA Threshold for preamble selection in TS 36.321 [6]. Value in bits. Value b56 corresponds to 56 bits, b144 corresponds to 144 bits and so on.
numberOfRA-Preambles Number of non-dedicated random access preambles in TS 36.321 [6]. Value is an integer. Value n4 corresponds to 4, n8 corresponds to 8 and so on.
powerRampingStep Power ramping factor in TS 36.321 [6]. Value in dB. Value dB0 corresponds to 0 dB, dB2 corresponds to 2 dB and so on.
preambleInitialReceivedTargetPower Initial preamble power in TS 36.321 [6]. Value in dBm. Value dBm-120 corresponds to -120 dBm, dBm-118 corresponds to -118 dBm and so on.
preambleMappingInfo Provides the mapping of premables to groups for each CE level, as specified in TS 36.321 [6].
preamblesGroupAConfig Provides the configuration for preamble grouping in TS 36.321 [6]. If the field is not signalled, the size of the random access preambles group A [6] is equal to *numberOfRA-Preambles*.
preambleTransMax, preambleTransMax-CE Maximum number of preamble transmission in TS 36.321 [6]. Value is an integer. Value n3 corresponds to 3, n4 corresponds to 4 and so on.
rach-CE-LevelInfoList Provides RACH information each coverage level. The first entry in the list is the contention resolution timer of CE level 0, the second entry in the list is the contention resolution timer of CE level 1, and so on. If E-UTRAN includes *rach-CE-LevelInfoList*, it includes the same number of entries as in *prach-ParametersListCE*.
ra-ResponseWindowSize Duration of the RA response window in TS 36.321 [6]. Value in subframes. Value sf2 corresponds to 2 subframes, sf3 corresponds to 3 subframes and so on. The same value applies for each serving cell (although the associated functionality is performed independently for each cell).
rar-HoppingConfig Frequency hopping activation/deactivation for RAR/Msg3/Msg4 for a CE level, see TS 36.211 [21].
sizeOfRA-PreamblesGroupA Size of the random access preambles group A in TS 36.321 [6]. Value is an integer. Value n4 corresponds to 4, n8 corresponds to 8 and so on.

– *RACH-ConfigDedicated*

The IE *RACH-ConfigDedicated* is used to specify the dedicated random access parameters.

RACH-ConfigDedicated information element

```
-- ASN1START

RACH-ConfigDedicated ::=        SEQUENCE {
    ra-PreambleIndex                    INTEGER (0..63),
    ra-PRACH-MaskIndex                  INTEGER (0..15)
}

-- ASN1STOP
```


DAINGEAN_0002154

RACH-ConfigDedicated field descriptions
ra-PRACH-MaskIndex
Explicitly signalled PRACH Mask Index for RA Resource selection in TS 36.321 [6].
ra-PreambleIndex
Explicitly signalled Random Access Preamble for RA Resource selection in TS 36.321 [6].

– *RadioResourceConfigCommon*

The IE *RadioResourceConfigCommonSIB* and IE *RadioResourceConfigCommon* are used to specify common radio resource configurations in the system information and in the mobility control information, respectively, e.g., the random access parameters and the static physical layer parameters.

RadioResourceConfigCommon information element

```
-- ASN1START

RadioResourceConfigCommonSIB ::=    SEQUENCE {
    rach-ConfigCommon                   RACH-ConfigCommon,
    bcch-Config                         BCCH-Config,
    pcch-Config                         PCCH-Config,
    prach-Config                        PRACH-ConfigSIB,
    pdsch-ConfigCommon                  PDSCH-ConfigCommon,
    pusch-ConfigCommon                  PUSCH-ConfigCommon,
    pucch-ConfigCommon                  PUCCH-ConfigCommon,
    soundingRS-UL-ConfigCommon          SoundingRS-UL-ConfigCommon,
    uplinkPowerControlCommon            UplinkPowerControlCommon,
    ul-CyclicPrefixLength               UL-CyclicPrefixLength,
    ...,
    [[  uplinkPowerControlCommon-v1020  UplinkPowerControlCommon-v1020      OPTIONAL    -- Need OR
    ]],
    [[  rach-ConfigCommon-v1250         RACH-ConfigCommon-v1250             OPTIONAL    -- Need OR
    ]],
    [[  pusch-ConfigCommon-v1270        PUSCH-ConfigCommon-v1270            OPTIONAL    -- Need OR
    ]],
    [[  bcch-Config-v1310               BCCH-Config-v1310                   OPTIONAL,   -- Need OR
        pcch-Config-v1310               PCCH-Config-v1310                   OPTIONAL,   -- Need OR
        freqHoppingParameters-r13       FreqHoppingParameters-r13           OPTIONAL,   -- Need OR
        pdsch-ConfigCommon-v1310        PDSCH-ConfigCommon-v1310            OPTIONAL,   -- Need OR
        pusch-ConfigCommon-v1310        PUSCH-ConfigCommon-v1310            OPTIONAL,   -- Need OR
        prach-ConfigCommon-v1310        PRACH-ConfigSIB-v1310               OPTIONAL,   -- Need OR
        pucch-ConfigCommon-v1310        PUCCH-ConfigCommon-v1310            OPTIONAL    -- Need OR
    ]]
}

RadioResourceConfigCommon ::=       SEQUENCE {
    rach-ConfigCommon                   RACH-ConfigCommon                   OPTIONAL,   -- Need ON
    prach-Config                        PRACH-Config,
    pdsch-ConfigCommon                  PDSCH-ConfigCommon                  OPTIONAL,   -- Need ON
    pusch-ConfigCommon                  PUSCH-ConfigCommon,
    phich-Config                        PHICH-Config                        OPTIONAL,   -- Need ON
    pucch-ConfigCommon                  PUCCH-ConfigCommon                  OPTIONAL,   -- Need ON
    soundingRS-UL-ConfigCommon          SoundingRS-UL-ConfigCommon          OPTIONAL,   -- Need ON
    uplinkPowerControlCommon            UplinkPowerControlCommon            OPTIONAL,   -- Need ON
    antennaInfoCommon                   AntennaInfoCommon                   OPTIONAL,   -- Need ON
    p-Max                               P-Max                               OPTIONAL,   -- Need OP
    tdd-Config                          TDD-Config                          OPTIONAL,   -- Cond TDD
    ul-CyclicPrefixLength               UL-CyclicPrefixLength,
    ...,
    [[  uplinkPowerControlCommon-v1020  UplinkPowerControlCommon-v1020      OPTIONAL    -- Need ON
    ]],
    [[  tdd-Config-v1130                TDD-Config-v1130                    OPTIONAL    -- Cond TDD3
    ]],
    [[  pusch-ConfigCommon-v1270        PUSCH-ConfigCommon-v1270            OPTIONAL    -- Need OR
    ]],
    [[
        prach-Config-v1310              PRACH-Config-v1310                  OPTIONAL,   -- Need ON
        freqHoppingParameters-r13       FreqHoppingParameters-r13           OPTIONAL,   -- Need ON
        pdsch-ConfigCommon-v1310        PDSCH-ConfigCommon-v1310            OPTIONAL,   -- Need ON
        pucch-ConfigCommon-v1310        PUCCH-ConfigCommon-v1310            OPTIONAL,   -- Need ON
        pusch-ConfigCommon-v1310        PUSCH-ConfigCommon-v1310            OPTIONAL,   -- Need ON
        uplinkPowerControlCommon-v1310  UplinkPowerControlCommon-v1310      OPTIONAL    -- Need ON
    ]]
}
```


DAINGEAN_0002155

```
RadioResourceConfigCommonPSCell-r12 ::= SEQUENCE {
    basicFields-r12                     RadioResourceConfigCommonSCell-r10,
    pucch-ConfigCommon-r12              PUCCH-ConfigCommon,
    rach-ConfigCommon-r12               RACH-ConfigCommon,
    uplinkPowerControlCommonPSCell-r12  UplinkPowerControlCommonPSCell-r12,
    ...,
    [[  uplinkPowerControlCommonPSCell-v1310
                                UplinkPowerControlCommon-v1310      OPTIONAL    -- Need ON
    ]]
}

RadioResourceConfigCommonSCell-r10 ::=  SEQUENCE {
    -- DL configuration as well as configuration applicable for DL and UL
    nonUL-Configuration-r10             SEQUENCE {
        -- 1: Cell characteristics
        dl-Bandwidth-r10                    ENUMERATED {n6, n15, n25, n50, n75, n100},
        -- 2: Physical configuration, general
        antennaInfoCommon-r10               AntennaInfoCommon,
        mbsfn-SubframeConfigList-r10        MBSFN-SubframeConfigList    OPTIONAL,   -- Need OR
        -- 3: Physical configuration, control
        phich-Config-r10                    PHICH-Config,
        -- 4: Physical configuration, physical channels
        pdsch-ConfigCommon-r10              PDSCH-ConfigCommon,
        tdd-Config-r10                      TDD-Config                  OPTIONAL    -- Cond
TDDSCell
    },
    -- UL configuration
    ul-Configuration-r10                SEQUENCE {
        ul-FreqInfo-r10                     SEQUENCE {
            ul-CarrierFreq-r10                  ARFCN-ValueEUTRA            OPTIONAL,   -- Need OP
            ul-Bandwidth-r10                    ENUMERATED {n6, n15,
                                                    n25, n50, n75, n100}    OPTIONAL,   -- Need OP
            additionalSpectrumEmissionSCell-r10     AdditionalSpectrumEmission
        },
        p-Max-r10                           P-Max                       OPTIONAL,   -- Need OP
        uplinkPowerControlCommonSCell-r10       UplinkPowerControlCommonSCell-r10,
        -- A special version of IE UplinkPowerControlCommon may be introduced
        -- 3: Physical configuration, control
        soundingRS-UL-ConfigCommon-r10      SoundingRS-UL-ConfigCommon,
        ul-CyclicPrefixLength-r10           UL-CyclicPrefixLength,
        -- 4: Physical configuration, physical channels
        prach-ConfigSCell-r10               PRACH-ConfigSCell-r10       OPTIONAL,   -- Cond TDD-
OR-NoR11
        pusch-ConfigCommon-r10              PUSCH-ConfigCommon
    }                                                                   OPTIONAL,   -- Need OR
    ...,
    [[  ul-CarrierFreq-v1090                ARFCN-ValueEUTRA-v9e0           OPTIONAL    -- Need OP
    ]],
    [[  rach-ConfigCommonSCell-r11          RACH-ConfigCommonSCell-r11      OPTIONAL,   -- Cond
ULSCell
        prach-ConfigSCell-r11               PRACH-Config                    OPTIONAL,   -- Cond UL
        tdd-Config-v1130                    TDD-Config-v1130                OPTIONAL,   -- Cond TDD2
        uplinkPowerControlCommonSCell-v1130
                                UplinkPowerControlCommonSCell-v1130         OPTIONAL    -- Cond UL
    ]],
    [[  pusch-ConfigCommon-v1270        PUSCH-ConfigCommon-v1270            OPTIONAL    -- Need OR
    ]],
    [[  pucch-ConfigCommon-r13              PUCCH-ConfigCommon      OPTIONAL,   -- Cond UL
        uplinkPowerControlCommonSCell-v1310
                                UplinkPowerControlCommonSCell-v1310 OPTIONAL    -- Cond UL
    ]]
}

BCCH-Config ::=                     SEQUENCE {
    modificationPeriodCoeff             ENUMERATED {n2, n4, n8, n16}
}

BCCH-Config-v1310 ::=               SEQUENCE {
    modificationPeriodCoeff-v1310       ENUMERATED {n64}
}

FreqHoppingParameters-r13 ::=       SEQUENCE {
    mpdcch-pdsch-HoppingNB-r13          ENUMERATED {nb2, nb4}               OPTIONAL,   -- Cond HO
    interval-DLHoppingConfigCommonModeA-r13 CHOICE {
        interval-FDD-r13                    ENUMERATED {int1, int2, int4, int8},
        interval-TDD-r13                    ENUMERATED {int1, int5, int10, int20}
    }                                                                       OPTIONAL,   -- Cond HO
    interval-DLHoppingConfigCommonModeB-r13 CHOICE {
```


DAINGEAN_0002156

```
        interval-FDD-r13                        ENUMERATED {int2, int4, int8, int16},
        interval-TDD-r13                        ENUMERATED { int5, int10, int20, int40}
    }                                                                   OPTIONAL,   -- Cond HO
    interval-ULHoppingConfigCommonModeA-r13 CHOICE {
        interval-FDD-r13                        ENUMERATED {int1, int2, int4, int8},
        interval-TDD-r13                        ENUMERATED {int1, int5, int10, int20}
    }                                                                   OPTIONAL,   -- Need OR
    interval-ULHoppingConfigCommonModeB-r13 CHOICE {
        interval-FDD-r13                        ENUMERATED {int2, int4, int8, int16},
        interval-TDD-r13                        ENUMERATED { int5, int10, int20, int40}
    }                                                                   OPTIONAL,   -- Need OR
    mpdcch-pdsch-HoppingOffset-r13              INTEGER (1..maxAvailNarrowBands-r13)
                                                                        OPTIONAL    -- Cond HO
}

PCCH-Config ::=                     SEQUENCE {
    defaultPagingCycle                  ENUMERATED {
                                            rf32, rf64, rf128, rf256},
    nB                                  ENUMERATED {
                                            fourT, twoT, oneT, halfT, quarterT, oneEighthT,
                                            oneSixteenthT, oneThirtySecondT}
}

PCCH-Config-v1310 ::=               SEQUENCE {
    paging-narrowBands-r13              INTEGER (1..maxAvailNarrowBands-r13),
    mpdcch-NumRepetition-Paging-r13     ENUMERATED {r1, r2, r4, r8, r16, r32, r64, r128, r256},
    nB-v1310                            ENUMERATED {one64thT, one128thT, one256thT}
                                                                        OPTIONAL    -- Need OR
}

UL-CyclicPrefixLength ::=           ENUMERATED {len1, len2}

-- ASN1STOP
```


DAINGEAN_0002157

***RadioResourceConfigCommon* field descriptions**
additionalSpectrumEmissionSCell The UE requirements related to *additionalSpectrumEmissionSCell* are defined in TS 36.101 [42]. E-UTRAN configures the same value in *additionalSpectrumEmissionSCell* for all SCell(s) of the same band with UL configured. The *additionalSpectrumEmissionSCell* is applicable for all serving cells (including PCell) of the same band with UL configured.
defaultPagingCycle Default paging cycle, used to derive 'T' in TS 36.304 [4]. Value rf32 corresponds to 32 radio frames, rf64 corresponds to 64 radio frames and so on.
modificationPeriodCoeff Actual modification period, expressed in number of radio frames= *modificationPeriodCoeff* * *defaultPagingCycle*. n2 corresponds to value 2, n4 corresponds to value 4, n8 corresponds to value 8, n16 corresponds to value 16, and n64 correponds to value 64.
mpdcch-NumRepetition-Paging Maximum number of repetitions for MPDCCH common search space (CSS) for paging, see TS 36.211 [21].
mpdcch-pdsch-HoppingOffset Frequency hopping offset for MPDCCH/PDSCH.
mpdcch-pdsch-HoppingNB The number of narrowbands for MPDCCH/PDSCH frequency hopping. Value nb2 corresponds to 2 narrowbands and value nb4 corresponds to 4 narrowbands.
nB Parameter: nB is used as one of parameters to derive the Paging Frame and Paging Occasion according to TS 36.304 [4]. Value in multiples of 'T' as defined in TS 36.304 [4]. A value of fourT corresponds to 4 * T, a value of twoT corresponds to 2 * T and so on. In case *nB-v1310* is signalled, the UE shall ignore *nB* (i.e. without suffix). EUTRAN does not include *nB-v1310* in *SystemInformationBlockType2*.
paging-narrowBands Number of narrowbands used for paging, see TS 36.304 [4], TS 36.212 [22] and TS 36.213 [23].
p-Max Pmax to be used in the target cell. If absent the UE applies the maximum power according to the UE capability.
ul-Bandwidth Parameter: transmission bandwidth configuration, N_{RB}, in uplink, see TS 36.101 [42, table 5.6-1]. Value n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on. If for FDD this parameter is absent, the uplink bandwidth is equal to the downlink bandwidth. For TDD this parameter is absent and it is equal to the downlink bandwidth.
ul-CarrierFreq For FDD: If absent, the (default) value determined from the default TX-RX frequency separation defined in TS 36.101 [42, table 5.7.3-1] applies. For TDD: This parameter is absent and it is equal to the downlink frequency.
ul-CyclicPrefixLength Parameter: Uplink cyclic prefix length see TS 36.211 [21, 5.2.1] where len1 corresponds to normal cyclic prefix and len2 corresponds to extended cyclic prefix.

Conditional presence	Explanation
TDD	The field is optional for TDD, Need ON; it is not present for FDD and the UE shall delete any existing value for this field.
TDD2	If *tdd-Config-r10* is present, the field is optional, Need OR. Otherwise the field is not present and the UE shall delete any existing value for this field.
TDD3	If *tdd-Config* is present, the field is optional, Need OR. Otherwise the field is not present and the UE shall delete any existing value for this field.
TDD-OR-NoR11	If *prach-ConfigSCell-r11* is absent, the field is optional for TDD, Need OR. Otherwise the field is not present and the UE shall delete any existing value for this field.
TDDSCell	This field is mandatory present for TDD; it is not present for FDD and the UE shall delete any existing value for this field.
UL	If the SCell is part of the STAG or concerns the PSCell and if *ul-Configuration* is included, the field is optional, Need OR. Otherwise the field is not present and the UE shall delete any existing value for this field.
ULSCell	For the PSCell (IE is included in *RadioResourceConfigCommonPSCell*) the field is absent. Otherwise, if the SCell is part of the STAG and if *ul-Configuration* is included, the field is optional, Need OR. Otherwise the field is not present and the UE shall delete any existing value for this field.
HO	For HO (IE is included in *RadioResourceConfigCommon*), the field is optional, need OR, otherwise (IE is included in *RadioResourceConfigCommonSIB*) the field is not present, and the UE shall take no action.

DAINGEAN_0002158

– *RadioResourceConfigDedicated*

The IE *RadioResourceConfigDedicated* is used to setup/modify/release RBs, to modify the MAC main configuration, to modify the SPS configuration and to modify dedicated physical configuration.

RadioResourceConfigDedicated information element

```
-- ASN1START

RadioResourceConfigDedicated ::=        SEQUENCE {
    srb-ToAddModList                    SRB-ToAddModList            OPTIONAL,       -- Cond HO-Conn
    drb-ToAddModList                    DRB-ToAddModList            OPTIONAL,       -- Cond HO-
toEUTRA
    drb-ToReleaseList                   DRB-ToReleaseList           OPTIONAL,       -- Need ON
    mac-MainConfig                      CHOICE {
            explicitValue                   MAC-MainConfig,
            defaultValue                    NULL
    }       OPTIONAL,                                                               -- Cond HO-
toEUTRA2
    sps-Config                          SPS-Config                  OPTIONAL,       -- Need ON
    physicalConfigDedicated             PhysicalConfigDedicated     OPTIONAL,       -- Need ON
    ...,
    [[  rlf-TimersAndConstants-r9       RLF-TimersAndConstants-r9           OPTIONAL    -- Need ON
    ]],
    [[  measSubframePatternPCell-r10    MeasSubframePatternPCell-r10        OPTIONAL    -- Need ON
    ]],
    [[  neighCellsCRS-Info-r11          NeighCellsCRS-Info-r11              OPTIONAL    -- Need ON
    ]],
    [[  naics-Info-r12              NAICS-AssistanceInfo-r12            OPTIONAL    -- Need ON
    ]],
    [[  neighCellsCRS-Info-r13          NeighCellsCRS-Info-r13              OPTIONAL,   -- Cond
CRSIM
        rlf-TimersAndConstants-r13      RLF-TimersAndConstants-r13          OPTIONAL    -- Need ON
    ]]
}

RadioResourceConfigDedicatedPSCell-r12 ::=      SEQUENCE {
    -- UE specific configuration extensions applicable for an PSCell
    physicalConfigDedicatedPSCell-r12       PhysicalConfigDedicated     OPTIONAL,   -- Need ON
    sps-Config-r12                          SPS-Config                  OPTIONAL,   -- Need ON
    naics-Info-r12                          NAICS-AssistanceInfo-r12    OPTIONAL,   -- Need ON
    ...,
    [[  neighCellsCRS-InfoPSCell-r13        NeighCellsCRS-Info-r13      OPTIONAL    -- Need ON
    ]]
}

RadioResourceConfigDedicatedSCG-r12 ::=     SEQUENCE {
    drb-ToAddModListSCG-r12             DRB-ToAddModListSCG-r12         OPTIONAL,   -- Need ON
    mac-MainConfigSCG-r12               MAC-MainConfig                  OPTIONAL,   -- Need ON
    rlf-TimersAndConstantsSCG-r12       RLF-TimersAndConstantsSCG-r12   OPTIONAL,   -- Need ON
    ...
}

RadioResourceConfigDedicatedSCell-r10 ::=   SEQUENCE {
    -- UE specific configuration extensions applicable for an SCell
    physicalConfigDedicatedSCell-r10        PhysicalConfigDedicatedSCell-r10    OPTIONAL,   -- Need
ON
    ...,
    [[  mac-MainConfigSCell-r11         MAC-MainConfigSCell-r11         OPTIONAL    -- Cond SCellAdd
    ]],
    [[  naics-Info-r12              NAICS-AssistanceInfo-r12        OPTIONAL    -- Need ON
    ]],
    [[  neighCellsCRS-InfoSCell-r13         NeighCellsCRS-Info-r13      OPTIONAL    -- Need ON
    ]]

}

SRB-ToAddModList ::=                SEQUENCE (SIZE (1..2)) OF SRB-ToAddMod

SRB-ToAddMod ::=    SEQUENCE {
    srb-Identity                        INTEGER (1..2),
    rlc-Config                          CHOICE {
        explicitValue                       RLC-Config,
        defaultValue                        NULL
    }       OPTIONAL,                                                           -- Cond Setup
    logicalChannelConfig                CHOICE {
        explicitValue                       LogicalChannelConfig,
```


DAINGEAN_0002159

```
        defaultValue                        NULL
    }       OPTIONAL,                                                   -- Cond Setup
    ...
}

DRB-ToAddModList ::=                SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod

DRB-ToAddModListSCG-r12 ::=     SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddModSCG-r12

DRB-ToAddMod ::=    SEQUENCE {
    eps-BearerIdentity                  INTEGER (0..15)         OPTIONAL,       -- Cond DRB-Setup
    drb-Identity                        DRB-Identity,
    pdcp-Config                         PDCP-Config             OPTIONAL,       -- Cond PDCP
    rlc-Config                          RLC-Config              OPTIONAL,       -- Cond SetupM
    logicalChannelIdentity              INTEGER (3..10)         OPTIONAL,       -- Cond DRB-SetupM
    logicalChannelConfig                LogicalChannelConfig    OPTIONAL,       -- Cond SetupM
    ...,
    [[  drb-TypeChange-r12                  ENUMERATED {toMCG}      OPTIONAL,       -- Need OP
        rlc-Config-v1250                    RLC-Config-v1250        OPTIONAL        -- Need ON
    ]],
    [[  rlc-Config-v1310                    RLC-Config-v1310        OPTIONAL,       -- Need ON
        drb-TypeLWA-r13                     BOOLEAN                 OPTIONAL,       -- Need ON
        drb-TypeLWIP-r13                    ENUMERATED {lwip, lwip-DL-only,
                                             lwip-UL-only, eutran}      OPTIONAL        -- Need ON
    ]]
}

DRB-ToAddModSCG-r12 ::= SEQUENCE {
    drb-Identity-r12                    DRB-Identity,
    drb-Type-r12                        CHOICE {
        split-r12                           NULL,
        scg-r12                             SEQUENCE {
            eps-BearerIdentity-r12              INTEGER (0..15) OPTIONAL,   -- Cond DRB-Setup
            pdcp-Config-r12                     PDCP-Config     OPTIONAL    -- Cond PDCP-S
        }
    }                                                           OPTIONAL,   -- Cond SetupS2
    rlc-ConfigSCG-r12                   RLC-Config              OPTIONAL,   -- Cond SetupS
    rlc-Config-v1250                        RLC-Config-v1250            OPTIONAL,   -- Need ON
    logicalChannelIdentitySCG-r12       INTEGER (3..10)         OPTIONAL,   -- Cond DRB-SetupS
    logicalChannelConfigSCG-r12         LogicalChannelConfig    OPTIONAL,   -- Cond SetupS
    ...
}

DRB-ToReleaseList ::=               SEQUENCE (SIZE (1..maxDRB)) OF DRB-Identity

MeasSubframePatternPCell-r10 ::=        CHOICE {
    release                             NULL,
    setup                           MeasSubframePattern-r10
}

NeighCellsCRS-Info-r11 ::=      CHOICE {
    release                         NULL,
    setup                           CRS-AssistanceInfoList-r11
}

CRS-AssistanceInfoList-r11 ::=  SEQUENCE (SIZE (1..maxCellReport)) OF CRS-AssistanceInfo-r11

CRS-AssistanceInfo-r11 ::= SEQUENCE {
    physCellId-r11                      PhysCellId,
    antennaPortsCount-r11               ENUMERATED {an1, an2, an4, spare1},
    mbsfn-SubframeConfigList-r11        MBSFN-SubframeConfigList,
    ...
}

NeighCellsCRS-Info-r13 ::=      CHOICE {
    release                         NULL,
    setup                           CRS-AssistanceInfoList-r13
}

CRS-AssistanceInfoList-r13 ::=  SEQUENCE (SIZE (1..maxCellReport)) OF CRS-AssistanceInfo-r13

CRS-AssistanceInfo-r13 ::= SEQUENCE {
    physCellId-r13                      PhysCellId,
    antennaPortsCount-r13               ENUMERATED {an1, an2, an4, spare1},
    mbsfn-SubframeConfigList-r13        MBSFN-SubframeConfigList    OPTIONAL,   -- Need ON
    ...
}
```


DAINGEAN_0002160

```
NAICS-AssistanceInfo-r12 ::=        CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        neighCellsToReleaseList-r12     NeighCellsToReleaseList-r12         OPTIONAL,   -- Need ON
        neighCellsToAddModList-r12      NeighCellsToAddModList-r12          OPTIONAL,   -- Need ON
        servCellp-a-r12                 P-a                                 OPTIONAL    -- Need ON
    }
}

NeighCellsToReleaseList-r12 ::=     SEQUENCE (SIZE (1..maxNeighCell-r12)) OF PhysCellId

NeighCellsToAddModList-r12 ::=  SEQUENCE (SIZE (1..maxNeighCell-r12)) OF NeighCellsInfo-r12

NeighCellsInfo-r12  ::=             SEQUENCE {
    physCellId-r12                  PhysCellId,
    p-b-r12                         INTEGER (0..3),
    crs-PortsCount-r12              ENUMERATED {n1, n2, n4, spare},
    mbsfn-SubframeConfig-r12        MBSFN-SubframeConfigList                OPTIONAL,   -- Need ON
    p-aList-r12                     SEQUENCE (SIZE (1..maxP-a-PerNeighCell-r12)) OF P-a,
    transmissionModeList-r12        BIT STRING (SIZE(8)),
    resAllocGranularity-r12         INTEGER (1..4),
    ...
}
P-a ::= ENUMERATED {    dB-6, dB-4dot77, dB-3, dB-1dot77,
                                dB0, dB1, dB2, dB3}

-- ASN1STOP
```


DAINGEAN_0002161

RadioResourceConfigDedicated field descriptions
crs-PortsCount Parameter represents the number of antenna ports for cell-specific reference signal used by the signaled neighboring cell where n1 corresponds to 1 antenna port, n2 to 2 antenna ports etc. see TS 36.211 [21, 6.10.1].
drb-Identity In case of DC, the DRB identity is unique within the scope of the UE i.e. an SCG DRB can not use the same value as used for an MCG or split DRB. For a split DRB the same identity is used for the MCG- and SCG parts of the configuration.
drb-ToAddModListSCG When an SCG is configured, E-UTRAN configures at least one SCG or split DRB.
drb-Type This field indicates whether the DRB is split or SCG DRB. E-UTRAN does not configure split and SCG DRBs simultaneously for the UE.
drb-TypeChange Indicates that a split/SCG DRB is reconfigured to an MCG DRB (i.e. E-UTRAN only signals the field in case the DRB type changes).
drb-TypeLWA Indicates whether a DRB is (re)configured as an LWA DRB or an LWA DRB is reconfigured not to use WLAN resources.
drb-TypeLWIP Indicates whether a DRB is (re)configured to use LWIP Tunnel in UL and DL (value *lwip*), DL only (value *lwip-DL-only*), UL only (value *lwip-UL-only*) or not to use LWIP Tunnel (value *eutran*).
logicalChannelConfig For SRBs a choice is used to indicate whether the logical channel configuration is signalled explicitly or set to the default logical channel configuration for SRB1 as specified in 9.2.1.1 or for SRB2 as specified in 9.2.1.2.
logicalChannelIdentity The logical channel identity for both UL and DL.
mac-MainConfig Although the ASN.1 includes a choice that is used to indicate whether the mac-MainConfig is signalled explicitly or set to the default MAC main configuration as specified in 9.2.2, EUTRAN does not apply "*defaultValue*".
mbsfn-SubframeConfig Defines the MBSFN subframe configuration used by the signaled neighboring cell. If absent, UE assumes no MBSFN configuration for the neighboring cell.
measSubframePatternPCell Time domain measurement resource restriction pattern for the PCell measurements (RSRP, RSRQ and the radio link monitoring).
neighCellsCRS-Info, neighCellsCRS-InfoSCell, neighCellsCRS-InfoPSCell This field contains assistance information used by the UE to mitigate interference from CRS while performing RRM/RLM/CSI measurement or data demodulation or DL control channel demodulation. When the received CRS assistance information is for a cell with CRS non-colliding with that of the CRS of the cell to measure, the UE may use the CRS assistance information to mitigate CRS interference. When the received CRS assistance information is for a cell with CRS colliding with that of the CRS of the cell to measure, the UE may use the CRS assistance information to mitigate CRS interference RRM/RLM (as specified in TS 36.133 [16]) and for CSI (as specified in TS 36.101 [42]) on the subframes indicated by *measSubframePatternPCell*, *measSubframePatternConfigNeigh*, *csi-MeasSubframeSet1* if configured, and the CSI subframe set 1 if *csi-MeasSubframeSets-r12* is configured. The UE may use CRS assistance information to mitigate CRS interference from the cells in the *CRS-AssistanceInfoList* for the demodulation purpose or DL control channel demodulation as specified in TS 36.101 [42]. EUTRAN does not configure *neighCellsCRS-Info-r11* or *neighCellsCRS-Info-r13* if *eimta-MainConfigPCell-r12* is configured.
neighCellsToAddModList This field contains assistance information used by the UE to cancel and suppress interference of a neighbouring cell. If this field is present for a neighbouring cell, the UE assumes that the transmission parameters listed in the sub-fields are used by the neighbouring cell. If this field is present for a neighbouring cell, the UE assumes the neighbour cell is subframe and SFN synchronized to the serving cell, has the same system bandwidth, UL/DL and special subframe configuration, and cyclic prefix length as the serving cell.
p-aList Indicates the restricted subset of power offset for QPSK, 16QAM, and 64QAM PDSCH transmissions for the neighbouring cell by using the parameter P_A, see TS 36.213 [23, 5.2]. Value dB-6 corresponds to -6 dB, dB-4dot77 corresponds to -4.77 dB etc.
p-b Parameter: P_B, indicates the cell-specific ratio used by the signaled neighboring cell, see TS 36.213 [23, Table 5.2-1].
physicalConfigDedicated The default dedicated physical configuration is specified in 9.2.4.
resAllocGranularity Indicates the resource allocation and precoding granularity in PRB pair level of the signaled neighboring cell, see TS 36.213 [23, 7.1.6].

DAINGEAN_0002162

***RadioResourceConfigDedicated* field descriptions**
rlc-Config For SRBs a choice is used to indicate whether the RLC configuration is signalled explicitly or set to the values defined in the default RLC configuration for SRB1 in 9.2.1.1 or for SRB2 in 9.2.1.2. RLC AM is the only applicable RLC mode for SRB1 and SRB2. E-UTRAN does not reconfigure the RLC mode of DRBs except when a full configuration option is used, and may reconfigure the RLC SN field size and the AM RLC LI field size only upon handover within E-UTRA or upon the first reconfiguration after RRC connection re-establishment or upon SCG Change for SCG and split DRBs.
servCellp-a Indicates the power offset for QPSK C-RNTI based PDSCH transmissions used by the serving cell, see TS 36.213 [23, 5.2]. Value dB-6 corresponds to -6 dB, dB-4dot77 corresponds to -4.77 dB etc.
sps-Config The default SPS configuration is specified in 9.2.3. Except for handover or releasing SPS for MCG, E-UTRAN does not reconfigure *sps-Config* for MCG when there is a configured downlink assignment or a configured uplink grant for MCG (see TS 36.321 [6]). Except for SCG change or releasing SPS for SCG, E-UTRAN does not reconfigure *sps-Config* for SCG when there is a configured downlink assignment or a configured uplink grant for SCG (see TS 36.321 [6]).
srb-Identity Value 1 is applicable for SRB1 only. Value 2 is applicable for SRB2 only.
transmissionModeList Indicates a subset of transmission mode 1, 2, 3, 4, 6, 8, 9, 10, for the signaled neighboring cell for which *NeighCellsInfo* applies. When TM10 is signaled, other signaled transmission parameters in *NeighCellsInfo* are not applicable to up to 8 layer transmission scheme of TM10. E-UTRAN may indicate TM9 when TM10 with QCL type A and DMRS scrambling with $n_{\mathrm{ID}}^{(i)} = N_{\mathrm{ID}}^{\mathrm{cell}}$ in TS 36.211 [21, 6.10.3.1] is used in the signalled neighbour cell and TM9 or TM10 with QCL type A and DMRS scrambling with $n_{\mathrm{ID}}^{(i)} = N_{\mathrm{ID}}^{\mathrm{cell}}$ in TS 36.211 [21, 6.10.3.1] is used in the serving cell. UE behaviour with NAICS when TM10 is used is only defined when QCL type A and DMRS scrambling with $n_{\mathrm{ID}}^{(i)} = N_{\mathrm{ID}}^{\mathrm{cell}}$ in TS 36.211 [21, 6.10.3.1] is used for the serving cell and all signalled neighbour cells. The first/ leftmost bit is for transmission mode 1, the second bit is for transmission mode 2, and so on.

DAINGEAN_0002163

Conditional presence	Explanation
CRSIM	The field is optionally present, need ON, if *neighCellsCRS-Info-r11* is not present; otherwise it is not present.
DRB-Setup	The field is mandatory present if the corresponding DRB is being set up; otherwise it is not present.
DRB-SetupM	The field is mandatory present upon setup of MCG or split DRB; The field is optionally present, Need ON, upon change from SCG to MCG DRB; otherwise it is not present.
DRB-SetupS	The field is mandatory present upon setup of SCG or split DRB, or upon change from MCG to split DRB; The field is optionally present, Need ON, upon change from MCG to SCG DRB; otherwise it is not present.
HO-Conn	The field is mandatory present in case of handover to E-UTRA or when the *fullConfig* is included in the *RRCConnectionReconfiguration* message or in case of RRC connection establishment (excluding *RRConnectionResume*); otherwise the field is optionally present, need ON. Upon connection establishment/ re-establishment only SRB1 is applicable (excluding *RRConnectionResume*).
HO-toEUTRA	The field is mandatory present in case of handover to E-UTRA or when the *fullConfig* is included in the *RRCConnectionReconfiguration* message; In case of RRC connection establishment (excluding *RRConnectionResume*); and RRC connection re-establishment the field is not present; otherwise the field is optionally present, need ON.
HO-toEUTRA2	The field is mandatory present in case of handover to E-UTRA or when the *fullConfig* is included in the *RRCConnectionReconfiguration* message; otherwise the field is optionally present, need ON.
PDCP	The field is mandatory present if the corresponding DRB is being setup; the field is optionally present, need ON, upon reconfiguration of the corresponding split DRB, upon the corresponding DRB type change from split to MCG bearer, upon the corresponding DRB type change from MCG to split bearer, upon handover within E-UTRA and upon the first reconfiguration after re-establishment but in all these cases only when fullConfig is not included in the RRCConnectionReconfiguration message; otherwise it is not present.
PDCP-S	The field is mandatory present if the corresponding DRB is being setup; the field is optionally present, need ON, upon SCG change; otherwise it is not present.
RLC-Setup	This field is optionally present if the corresponding DRB is being setup, need ON; otherwise it is not present.
SCellAdd	The field is optionally present, need ON, upon SCell addition; otherwise it is not present.
Setup	The field is mandatory present if the corresponding SRB/DRB is being setup; otherwise the field is optionally present, need ON.
SetupM	The field is mandatory present upon setup of an MCG or split DRB; otherwise the field is optionally present, need ON.
SetupS	The field is mandatory present upon setup of an SCG or split DRB, as well as upon change from MCG to split DRB; otherwise the field is optionally present, need ON.
SetupS2	The field is mandatory present upon setup of an SCG or split DRB, as well as upon change from MCG to split or SCG DRB. For an SCG DRB the field is optionally present, need ON. Otherwise the field is not present.

– *RCLWI-Configuration*

The IE *RCLWI-Configuration* is used to add, modify or release the RCLWI configuration.

```
-- ASN1START

RCLWI-Configuration-r13 ::=          CHOICE {
    release                              NULL,
    setup                                SEQUENCE {
        rclwi-Config-r13                     RCLWI-Config-r13
    }
}

RCLWI-Config-r13 ::=                 SEQUENCE {
    command                              CHOICE {
        steerToWLAN-r13                      SEQUENCE {
            mobilityConfig-r13                   WLAN-Id-List-r12
        },
        steerToLTE-r13                       NULL
    },
    ...
}

-- ASN1STOP
```


DAINGEAN_0002164

– *RLC-Config*

The IE *RLC-Config* is used to specify the RLC configuration of SRBs and DRBs.

RLC-Config information element

```
-- ASN1START

RLC-Config ::=              CHOICE {
    am                                  SEQUENCE {
        ul-AM-RLC                           UL-AM-RLC,
        dl-AM-RLC                           DL-AM-RLC
    },
    um-Bi-Directional                   SEQUENCE {
        ul-UM-RLC                           UL-UM-RLC,
        dl-UM-RLC                           DL-UM-RLC
    },
    um-Uni-Directional-UL               SEQUENCE {
        ul-UM-RLC                           UL-UM-RLC
    },
    um-Uni-Directional-DL               SEQUENCE {
        dl-UM-RLC                           DL-UM-RLC
    },
    ...
}

RLC-Config-v1250 ::=                SEQUENCE {
    ul-extended-RLC-LI-Field-r12            BOOLEAN,
    dl-extended-RLC-LI-Field-r12            BOOLEAN
}

RLC-Config-v1310 ::=                SEQUENCE {
    ul-extended-RLC-AM-SN-r13                   BOOLEAN,
    dl-extended-RLC-AM-SN-r13                   BOOLEAN,
    pollPDU-v1310                               PollPDU-v1310       OPTIONAL    -- Need OR
}

UL-AM-RLC ::=                       SEQUENCE {
    t-PollRetransmit                    T-PollRetransmit,
    pollPDU                             PollPDU,
    pollByte                            PollByte,
    maxRetxThreshold                    ENUMERATED {
                                            t1, t2, t3, t4, t6, t8, t16, t32}
}

DL-AM-RLC ::=                       SEQUENCE {
    t-Reordering                        T-Reordering,
    t-StatusProhibit                    T-StatusProhibit
}

UL-UM-RLC ::=                       SEQUENCE {
    sn-FieldLength                      SN-FieldLength
}

DL-UM-RLC ::=                       SEQUENCE {
    sn-FieldLength                      SN-FieldLength,
    t-Reordering                        T-Reordering
}

SN-FieldLength ::=                  ENUMERATED {size5, size10}

T-PollRetransmit ::=                ENUMERATED {
                                        ms5, ms10, ms15, ms20, ms25, ms30, ms35,
                                        ms40, ms45, ms50, ms55, ms60, ms65, ms70,
                                        ms75, ms80, ms85, ms90, ms95, ms100, ms105,
                                        ms110, ms115, ms120, ms125, ms130, ms135,
                                        ms140, ms145, ms150, ms155, ms160, ms165,
                                        ms170, ms175, ms180, ms185, ms190, ms195,
                                        ms200, ms205, ms210, ms215, ms220, ms225,
                                        ms230, ms235, ms240, ms245, ms250, ms300,
                                        ms350, ms400, ms450, ms500, ms800-v1310,
                                        ms1000-v1310, ms2000-v1310, ms4000-v1310,
                                         spare5, spare4, spare3, spare2, spare1}

PollPDU ::=                         ENUMERATED {
                                        p4, p8, p16, p32, p64, p128, p256, pInfinity}
```


DAINGEAN_0002165

```
PollPDU-v1310 ::=                   ENUMERATED {
                                        p512, p1024, p2048, p4096, p6144, p8192, p12288, p16384}

PollByte ::=                        ENUMERATED {
                                        kB25, kB50, kB75, kB100, kB125, kB250, kB375,
                                        kB500, kB750, kB1000, kB1250, kB1500, kB2000,
                                        kB3000, kBinfinity, spare1}

T-Reordering ::=                    ENUMERATED {
                                        ms0, ms5, ms10, ms15, ms20, ms25, ms30, ms35,
                                        ms40, ms45, ms50, ms55, ms60, ms65, ms70,
                                        ms75, ms80, ms85, ms90, ms95, ms100, ms110,
                                        ms120, ms130, ms140, ms150, ms160, ms170,
                                        ms180, ms190, ms200, ms1600-v1310}

T-StatusProhibit ::=                ENUMERATED {
                                        ms0, ms5, ms10, ms15, ms20, ms25, ms30, ms35,
                                        ms40, ms45, ms50, ms55, ms60, ms65, ms70,
                                        ms75, ms80, ms85, ms90, ms95, ms100, ms105,
                                        ms110, ms115, ms120, ms125, ms130, ms135,
                                        ms140, ms145, ms150, ms155, ms160, ms165,
                                        ms170, ms175, ms180, ms185, ms190, ms195,
                                        ms200, ms205, ms210, ms215, ms220, ms225,
                                        ms230, ms235, ms240, ms245, ms250, ms300,
                                        ms350, ms400, ms450, ms500, ms800-v1310 ,
                                        ms1000-v1310, ms1200-v1310, ms1600-v1310, ms2000-v1310,
ms2400-v1310, spare2,
                                        spare1}

-- ASN1STOP
```

***RLC-Config* field descriptions**
dl-extended-RLC-LI-Field, ul-extended-RLC-LI-Field Indicates the RLC LI field size. Value *TRUE* means that 15 bit LI length shall be used, otherwise 11 bit LI length shall be used; see TS 36.322 [7]. E-UTRAN enables this field only when *RLC-Config* (without suffix) is set to *am*.
maxRetxThreshold Parameter for RLC AM in TS 36.322 [7]. Value t1 corresponds to 1 retransmission, t2 to 2 retransmissions and so on.
pollByte Parameter for RLC AM in TS 36.322 [7]. Value kB25 corresponds to 25 kBytes, kB50 to 50 kBytes and so on. kBInfinity corresponds to an infinite amount of kBytes.
pollPDU Parameter for RLC AM in TS 36.322 [7]. Value p4 corresponds to 4 PDUs, p8 to 8 PDUs and so on. pInfinity corresponds to an infinite number of PDUs. In case *pollPDU-r13* is signalled, the UE shall ignore *pollPDU* (i.e. without suffix). E-UTRAN enables *pollPDU-v1310* field only when *RLC-Config* (without suffix) is set to *am*.
sn-FieldLength Indicates the UM RLC SN field size, see TS 36.322 [7], in bits. Value size5 means 5 bits, size10 means 10 bits.
t-PollRetransmit Timer for RLC AM in TS 36.322 [7], in milliseconds. Value ms5 means 5ms, ms10 means 10ms and so on. EUTRAN configures values msX-v1310 (with suffix) only if UE supports CE.
t-Reordering Timer for reordering in TS 36.322 [7], in milliseconds. Value ms0 means 0ms, ms5 means 5ms and so on.
t-StatusProhibit Timer for status reporting in TS 36.322 [7], in milliseconds. Value ms0 means 0ms, ms5 means 5ms and so on. EUTRAN configures values msX-v1310 (with suffix) only if UE supports operation in CE.
ul-extended-RLC-AM-SN, dl-extended-RLC-AM-SN Indicates whether or not the UE shall use the exteneded SN and SO length for AM bearer. Value *TRUE* means that 16 bit SN length and 16 bit SO length shall be used, otherwise 10 bit SN length and 15 bit SO length shall be used; see TS 36.322 [7].

– *RLF-TimersAndConstants*

The IE *RLF-TimersAndConstants* contains UE specific timers and constants applicable for UEs in RRC_CONNECTED.

***RLF-TimersAndConstants* information element**

```
-- ASN1START

RLF-TimersAndConstants-r9 ::=           CHOICE {
```


DAINGEAN_0002166

```
    release                                 NULL,
    setup                                   SEQUENCE {
        t301-r9                             ENUMERATED {
                                                ms100, ms200, ms300, ms400, ms600, ms1000, ms1500,
                                                ms2000},
        t310-r9                             ENUMERATED {
                                                ms0, ms50, ms100, ms200, ms500, ms1000, ms2000},
        n310-r9                             ENUMERATED {
                                                n1, n2, n3, n4, n6, n8, n10, n20},
        t311-r9                             ENUMERATED {
                                                ms1000, ms3000, ms5000, ms10000, ms15000,
                                                ms20000, ms30000},
        n311-r9                             ENUMERATED {
                                                n1, n2, n3, n4, n5, n6, n8, n10},
        ...
    }
}

RLF-TimersAndConstants-r13 ::=          CHOICE {
    release                                 NULL,
    setup                                   SEQUENCE {
        t301-v1310                              ENUMERATED {
                                                    ms2500, ms3000, ms3500, ms4000, ms5000,
                                                    ms6000, ms8000, ms10000},
        ...
    }
}

RLF-TimersAndConstantsSCG-r12 ::=           CHOICE {
    release                                 NULL,
    setup                                   SEQUENCE {
        t313-r12                            ENUMERATED {
                                                ms0, ms50, ms100, ms200, ms500, ms1000, ms2000},
        n313-r12                            ENUMERATED {
                                                n1, n2, n3, n4, n6, n8, n10, n20},
        n314-r12                            ENUMERATED {
                                                n1, n2, n3, n4, n5, n6, n8, n10},
        ...
    }
}

-- ASN1STOP
```

***RLF-TimersAndConstants* field descriptions**
n3xy Constants are described in section 7.4. n1 corresponds with 1, n2 corresponds with 2 and so on.
t3xy Timers are described in section 7.3. Value ms0 corresponds with 0 ms, ms50 corresponds with 50 ms and so on.

– *RN-SubframeConfig*

The IE *RN-SubframeConfig* is used to specify the subframe configuration for an RN.

***RN-SubframeConfig* information element**

```
-- ASN1START

RN-SubframeConfig-r10 ::=       SEQUENCE {
    subframeConfigPattern-r10           CHOICE {
        subframeConfigPatternFDD-r10    BIT STRING (SIZE(8)),
        subframeConfigPatternTDD-r10    INTEGER (0..31)
    }                                                               OPTIONAL,   -- Need ON
    rpdcch-Config-r10               SEQUENCE {
        resourceAllocationType-r10      ENUMERATED {type0, type1, type2Localized, type2Distributed,
                                                    spare4, spare3, spare2, spare1},
        resourceBlockAssignment-r10         CHOICE {
            type01-r10                          CHOICE {
                nrb6-r10                            BIT STRING (SIZE(6)),
                nrb15-r10                           BIT STRING (SIZE(8)),
                nrb25-r10                           BIT STRING (SIZE(13)),
                nrb50-r10                           BIT STRING (SIZE(17)),
                nrb75-r10                           BIT STRING (SIZE(19)),
                nrb100-r10                          BIT STRING (SIZE(25))
```


DAINGEAN_0002167

```
            },
            type2-r10                           CHOICE {
                nrb6-r10                            BIT STRING (SIZE(5)),
                nrb15-r10                           BIT STRING (SIZE(7)),
                nrb25-r10                           BIT STRING (SIZE(9)),
                nrb50-r10                           BIT STRING (SIZE(11)),
                nrb75-r10                           BIT STRING (SIZE(12)),
                nrb100-r10                          BIT STRING (SIZE(13))
            },
            ...
        },
        demodulationRS-r10              CHOICE {
            interleaving-r10                ENUMERATED {crs},
            noInterleaving-r10              ENUMERATED {crs, dmrs}
        },
        pdsch-Start-r10                 INTEGER (1..3),
        pucch-Config-r10                CHOICE {
            tdd                             CHOICE {
                channelSelectionMultiplexingBundling    SEQUENCE {
                    n1PUCCH-AN-List-r10         SEQUENCE (SIZE (1..4)) OF INTEGER (0..2047)
                },
                fallbackForFormat3              SEQUENCE {
                    n1PUCCH-AN-P0-r10               INTEGER (0..2047),
                    n1PUCCH-AN-P1-r10               INTEGER (0..2047)       OPTIONAL    -- Need OR
                }
            },
            fdd                             SEQUENCE {
                n1PUCCH-AN-P0-r10               INTEGER (0..2047),
                n1PUCCH-AN-P1-r10               INTEGER (0..2047)           OPTIONAL    -- Need OR
            }
        },
        ...
    }                                                                       OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```


DAINGEAN_0002168

***RN-SubframeConfig* field descriptions**
demodulationRS Indicates which reference signals are used for R-PDCCH demodulation according to TS 36.216 [55, 7.4.1]. Value interleaving corresponds to cross-interleaving and value noInterleaving corresponds to no cross-interleaving according to TS 36.216 [55, 7.4.2 and 7.4.3].
n1PUCCH-AN-List Parameter: $n^{(1)}_{\mathrm{PUCCH},i}$, see TS 36.216, [55, 7.5.1]. This parameter is only applicable for TDD. Configures PUCCH HARQ-ACK resources if the RN is configured to use HARQ-ACK channel selection, HARQ-ACK multiplexing or HARQ-ACK bundling.
n1PUCCH-AN-P0, n1PUCCH-AN-P1 Parameter: $n^{(1,p)}_{\mathrm{PUCCH}}$, for antenna port P0 and for antenna port P1 respectively, see TS 36.216, [55, 7.5.1] for FDD and [55, 7.5.2] for TDD.
pdsch-Start Parameter: *DL-StartSymbol*, see TS 36.216 [55, Table 5.4-1].
resourceAllocationType Represents the resource allocation used: type 0, type 1 or type 2 according to TS 36.213 [23, 7.1.6]. Value type0 corresponds to type 0, value type1 corresponds to type 1, value type2Localized corresponds to type 2 with localized virtual resource blocks and type2Distributed corresponds to type 2 with distributed virtual resource blocks.
resourceBlockAssignment Indicates the resource block assignment bits according to TS 36.213 [23, 7.1.6]. Value type01 corresponds to type 0 and type 1, and the value type2 corresponds to type 2. Value nrb6 corresponds to a downlink system bandwidth of 6 resource blocks, value nrb15 corresponds to a downlink system bandwidth of 15 resource blocks, and so on.
subframeConfigPatternFDD Parameter: *SubframeConfigurationFDD*, see TS 36.216 [55, Table 5.2-1]. Defines the DL subframe configuration for eNB-to-RN transmission, i.e. those subframes in which the eNB may indicate downlink assignments for the RN. The radio frame in which the pattern starts (i.e. the radio frame in which the first bit of the *subframeConfigPatternFDD* corresponds to subframe #0) occurs when SFN mod 4 = 0.
subframeConfigPatternTDD Parameter: *SubframeConfigurationTDD*, see TS 36.216 [55, Table 5.2-2]. Defines the DL and UL subframe configuration for eNB-RN transmission.

– *SchedulingRequestConfig*

The IE *SchedulingRequestConfig* is used to specify the Scheduling Request related parameters

***SchedulingRequestConfig* information element**

```
-- ASN1START

SchedulingRequestConfig ::=     CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        sr-PUCCH-ResourceIndex              INTEGER (0..2047),
        sr-ConfigIndex                      INTEGER (0..157),
        dsr-TransMax                        ENUMERATED {
                                                n4, n8, n16, n32, n64, spare3, spare2, spare1}
    }
}

SchedulingRequestConfig-v1020 ::=   SEQUENCE {
    sr-PUCCH-ResourceIndexP1-r10        INTEGER (0..2047)           OPTIONAL        -- Need OR
}

SchedulingRequestConfigSCell-r13 ::=        CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        sr-PUCCH-ResourceIndex-r13          INTEGER (0..2047),
        sr-PUCCH-ResourceIndexP1-r13        INTEGER (0..2047)           OPTIONAL,       -- Need OR
        sr-ConfigIndex-r13                  INTEGER (0..157),
        dsr-TransMax-r13                    ENUMERATED {
                                                n4, n8, n16, n32, n64, spare3, spare2, spare1}
    }

}

-- ASN1STOP
```


DAINGEAN_0002169

SchedulingRequestConfig field descriptions
dsr-TransMax
Parameter for SR transmission in TS 36.321 [6, 5.4.4]. The value n4 corresponds to 4 transmissions, n8 corresponds to 8 transmissions and so on. EUTRAN configures the same value for all serving cells for which this field is configured.
sr-ConfigIndex
Parameter I_{SR}. See TS 36.213 [23,10.1]. The values 156 and 157 are not applicable for Release 8.
sr-PUCCH-ResourceIndex, sr-PUCCH-ResourceIndexP1
Parameter: $n_{\mathrm{PUCCH,SRI}}^{(1,p)}$ for antenna port P0 and for antenna port P1 respectively, see TS 36.213 [23, 10.1]. E-UTRAN configures *sr-PUCCH-ResourceIndexP1* only if *sr-PUCCHResourceIndex* is configured.

– *SoundingRS-UL-Config*

The IE *SoundingRS-UL-Config* is used to specify the uplink Sounding RS configuration for periodic and aperiodic sounding.

SoundingRS-UL-Config information element

```
-- ASN1START

SoundingRS-UL-ConfigCommon ::=      CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        srs-BandwidthConfig                 ENUMERATED {bw0, bw1, bw2, bw3, bw4, bw5, bw6, bw7},
        srs-SubframeConfig                  ENUMERATED {
                                                sc0, sc1, sc2, sc3, sc4, sc5, sc6, sc7,
                                                sc8, sc9, sc10, sc11, sc12, sc13, sc14, sc15},
        ackNackSRS-SimultaneousTransmission BOOLEAN,
        srs-MaxUpPts                        ENUMERATED {true}           OPTIONAL    -- Cond TDD
    }
}

SoundingRS-UL-ConfigDedicated ::=   CHOICE{
    release                             NULL,
    setup                               SEQUENCE {
        srs-Bandwidth                       ENUMERATED {bw0, bw1, bw2, bw3},
        srs-HoppingBandwidth                ENUMERATED {hbw0, hbw1, hbw2, hbw3},
        freqDomainPosition                  INTEGER (0..23),
        duration                            BOOLEAN,
        srs-ConfigIndex                     INTEGER (0..1023),
        transmissionComb                    INTEGER (0..1),
        cyclicShift                         ENUMERATED {cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7}
    }
}

SoundingRS-UL-ConfigDedicated-v1020 ::= SEQUENCE {
    srs-AntennaPort-r10                 SRS-AntennaPort
}

SoundingRS-UL-ConfigDedicated-v1310 ::= CHOICE{
    release                             NULL,
    setup                               SEQUENCE {
        transmissionComb-v1310              INTEGER (2..3)              OPTIONAL,   -- Need OR
        cyclicShift-v1310                   ENUMERATED {cs8, cs9, cs10, cs11}   OPTIONAL,   -- Need
OR
        transmissionCombNum-r13             ENUMERATED {n2, n4}     OPTIONAL    -- Need OR
    }
}

SoundingRS-UL-ConfigDedicatedUpPTsExt-r13 ::=   CHOICE{
    release                             NULL,
    setup                               SEQUENCE {
        srs-UpPtsAdd-r13                        ENUMERATED {sym2, sym4},
        srs-Bandwidth-r13                   ENUMERATED {bw0, bw1, bw2, bw3},
        srs-HoppingBandwidth-r13            ENUMERATED {hbw0, hbw1, hbw2, hbw3},
        freqDomainPosition-r13              INTEGER (0..23),
        duration-r13                        BOOLEAN,
        srs-ConfigIndex-r13                 INTEGER (0..1023),
        transmissionComb-r13                INTEGER (0..3),
        cyclicShift-r13                     ENUMERATED {cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7,
```


DAINGEAN_0002170

```
                                                    cs8, cs9, cs10, cs11},
        srs-AntennaPort-r13                 SRS-AntennaPort,
        transmissionCombNum-r13             ENUMERATED {n2, n4}
    }
}

SoundingRS-UL-ConfigDedicatedAperiodic-r10 ::=  CHOICE{
    release                                 NULL,
    setup                                   SEQUENCE {
        srs-ConfigIndexAp-r10                   INTEGER (0..31),
        srs-ConfigApDCI-Format4-r10             SEQUENCE (SIZE (1..3)) OF SRS-ConfigAp-r10  OPTIONAL,--
Need ON
        srs-ActivateAp-r10                      CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    srs-ConfigApDCI-Format0-r10             SRS-ConfigAp-r10,
                    srs-ConfigApDCI-Format1a2b2c-r10        SRS-ConfigAp-r10,
                    ...
                }
        }                                                                       OPTIONAL    -- Need ON
    }
}

SoundingRS-UL-ConfigDedicatedAperiodic-v1310 ::=    CHOICE{
    release                                 NULL,
    setup                                   SEQUENCE {
        srs-ConfigApDCI-Format4-v1310           SEQUENCE (SIZE (1..3)) OF SRS-ConfigAp-v1310
    OPTIONAL,--Need ON
        srs-ActivateAp-v1310                    CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    srs-ConfigApDCI-Format0-v1310       SRS-ConfigAp-v1310  OPTIONAL,   -- Need ON
                    srs-ConfigApDCI-Format1a2b2c-v1310  SRS-ConfigAp-v1310  OPTIONAL    -- Need ON
                }
        }                                                                       OPTIONAL    -- Need ON
    }
}

SoundingRS-UL-ConfigDedicatedAperiodicUpPTsExt-r13 ::=  CHOICE{
    release                                 NULL,
    setup                                   SEQUENCE {
        srs-UpPtsAdd-r13                        ENUMERATED {sym2, sym4},
        srs-ConfigIndexAp-r13                   INTEGER (0..31),
        srs-ConfigApDCI-Format4-r13             SEQUENCE (SIZE (1..3)) OF SRS-ConfigAp-r13  OPTIONAL,--
Need ON
        srs-ActivateAp-r13                      CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    srs-ConfigApDCI-Format0-r13         SRS-ConfigAp-r13,
                    srs-ConfigApDCI-Format1a2b2c-r13        SRS-ConfigAp-r13
                }
        }                                                                       OPTIONAL    -- Need ON
    }
}

SRS-ConfigAp-r10 ::= SEQUENCE {
    srs-AntennaPortAp-r10               SRS-AntennaPort,
    srs-BandwidthAp-r10                 ENUMERATED {bw0, bw1, bw2, bw3},
    freqDomainPositionAp-r10            INTEGER (0..23),
    transmissionCombAp-r10              INTEGER (0..1),
    cyclicShiftAp-r10                   ENUMERATED {cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7}
}

SRS-ConfigAp-v1310 ::= SEQUENCE {
    transmissionCombAp-v1310            INTEGER (2..3)                      OPTIONAL,   -- Need OR
    cyclicShiftAp-v1310                 ENUMERATED {cs8, cs9, cs10, cs11}   OPTIONAL,   -- Need OR
    transmissionCombNum-r13             ENUMERATED {n2, n4}         OPTIONAL    -- Need OR
}

SRS-ConfigAp-r13 ::= SEQUENCE {
    srs-AntennaPortAp-r13               SRS-AntennaPort,
    srs-BandwidthAp-r13                 ENUMERATED {bw0, bw1, bw2, bw3},
    freqDomainPositionAp-r13            INTEGER (0..23),
    transmissionCombAp-r13              INTEGER (0..3),
    cyclicShiftAp-r13                   ENUMERATED {cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7,
                                            cs8, cs9, cs10, cs11},
    transmissionCombNum-r13             ENUMERATED {n2, n4}
}
```


DAINGEAN_0002171

```
SRS-AntennaPort ::=                ENUMERATED {an1, an2, an4, spare1}

-- ASN1STOP
```

SoundingRS-UL-Config field descriptions
ackNackSRS-SimultaneousTransmission Parameter: *Simultaneous-AN-and-SRS*, see TS 36.213 [23, 8.2]. For SCells this field is not applicable and the UE shall ignore the value.
cyclicShift, cyclicShiftAp Parameter: n_SRS for periodic and aperiodic sounding reference signal transmission respectively. See TS 36.211 [21, 5.5.3.1], where cs0 corresponds to 0 etc.
duration Parameter: Duration for periodic sounding reference signal transmission. See TS 36.213 [21, 8.2]. FALSE corresponds to "single" and value TRUE to "indefinite".
freqDomainPosition, freqDomainPositionAp Parameter: n_{RRC} for periodic and aperiodic sounding reference signal transmission respectively, see TS 36.211 [21, 5.5.3.2].
srs-AntennaPort, srs-AntennaPortAp Indicates the number of antenna ports used for periodic and aperiodic sounding reference signal transmission respectively, see TS 36.211 [21, 5.5.3]. UE shall release *srs-AntennaPort* if *SoundingRS-UL-ConfigDedicated* is released.
srs-Bandwidth, srs-BandwidthAp Parameter: B_{SRS} for periodic and aperiodic sounding reference signal transmission respectively, see TS 36.211 [21, tables 5.5.3.2-1, 5.5.3.2-2, 5.5.3.2-3 and 5.5.3.2-4].
srs-BandwidthConfig Parameter: SRS Bandwidth Configuration. See TS 36.211, [21, table 5.5.3.2-1, 5.5.3.2-2, 5.5.3.2-3 and 5.5.3.2-4]. Actual configuration depends on UL bandwidth. bw0 corresponds to value 0, bw1 to value 1 and so on.
srs-ConfigApDCI-Format0 / srs-ConfigApDCI-Format1a2b2c / srs-ConfigApDCI-Format4 Parameters indicate the resource configurations for aperiodic sounding reference signal transmissions triggered by DCI formats 0, 1A, 2B, 2C, 4. See TS 36.213 [23, 8.2].
srs-ConfigIndex, srs-ConfigIndexAp Parameter: I_{SRS} for periodic and aperiodic sounding reference signal transmission respectively. See TS 36.213 [23, table 8.2-1 and table 8.2-2] for periodic and TS 36.213 [23, table 8.2-4 and table 8.2-5] for aperiodic SRS transmission.
srs-HoppingBandwidth Parameter: SRS hopping bandwidth $b_{hop} \in \{0,1,2,3\}$ for periodic sounding reference signal transmission, see TS 36.211 [21, 5.5.3.2] where hbw0 corresponds to value 0, hbw1 to value 1 and so on.
srs-MaxUpPts Parameter: srsMaxUpPts, see TS 36.211 [21, 5.5.3.2]. If this field is present, reconfiguration of $m_{\mathrm{SRS},0}^{\max}$ applies for UpPts, otherwise reconfiguration does not apply.
srs-SubframeConfig Parameter: SRS SubframeConfiguration. See TS 36.211, [21, table 5.5.3.3-1] applies for FDD whereas TS 36.211 [21, table 5.5.3.3-2] applies for TDD. sc0 corresponds to value 0, sc1 corresponds to value 1 and so on.
srs-UpPtsAdd The field only applies for TDD. If E-UTRAN configures both *soundingRS-UL-ConfigDedicatedUpPTsExt* and *soundingRS-UL-ConfigDedicatedAperiodicUpPTsExt srs-UpPtsAdd* in both fields is set to the same value.
transmissionComb, transmissionCombAp Parameter: $\bar{k}_{\mathrm{TC}} \in \{0..3\}$ for periodic and aperiodic sounding reference signal transmission respectively, see TS 36.211 [21, 5.5.3.2].

Conditional presence	Explanation
TDD	This field is optional present for TDD, need OR; it is not present for FDD and the UE shall delete any existing value for this field.

– *SPS-Config*

The IE *SPS-Config* is used to specify the semi-persistent scheduling configuration.

DAINGEAN_0002172

SPS-Config information element

```
-- ASN1START

SPS-Config ::=  SEQUENCE {
    semiPersistSchedC-RNTI          C-RNTI                  OPTIONAL,           -- Need OR
    sps-ConfigDL                    SPS-ConfigDL            OPTIONAL,           -- Need ON
    sps-ConfigUL                    SPS-ConfigUL            OPTIONAL            -- Need ON
}

SPS-ConfigDL ::=    CHOICE{
    release                         NULL,
    setup                           SEQUENCE {
        semiPersistSchedIntervalDL          ENUMERATED {
                                                sf10, sf20, sf32, sf40, sf64, sf80,
                                                sf128, sf160, sf320, sf640, spare6,
                                                spare5, spare4, spare3, spare2,
                                                spare1},
        numberOfConfSPS-Processes           INTEGER (1..8),
        n1PUCCH-AN-PersistentList           N1PUCCH-AN-PersistentList,
        ...,
        [[  twoAntennaPortActivated-r10     CHOICE {
                release                         NULL,
                setup                           SEQUENCE {
                    n1PUCCH-AN-PersistentListP1-r10 N1PUCCH-AN-PersistentList
                }
            }                                                               OPTIONAL    -- Need ON
        ]]
    }
}

SPS-ConfigUL ::=    CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        semiPersistSchedIntervalUL          ENUMERATED {
                                                sf10, sf20, sf32, sf40, sf64, sf80,
                                                sf128, sf160, sf320, sf640, spare6,
                                                spare5, spare4, spare3, spare2,
                                                spare1},
        implicitReleaseAfter                ENUMERATED {e2, e3, e4, e8},
        p0-Persistent                       SEQUENCE {
            p0-NominalPUSCH-Persistent          INTEGER (-126..24),
            p0-UE-PUSCH-Persistent              INTEGER (-8..7)
        }       OPTIONAL,                                           -- Need OP
        twoIntervalsConfig                  ENUMERATED {true}       OPTIONAL,   -- Cond TDD
        ...,
        [[  p0-PersistentSubframeSet2-r12       CHOICE {
                release                             NULL,
                setup                               SEQUENCE {
                    p0-NominalPUSCH-PersistentSubframeSet2-r12      INTEGER (-126..24),
                    p0-UE-PUSCH-PersistentSubframeSet2-r12          INTEGER (-8..7)
                }
            }                                                       OPTIONAL    -- Need ON
        ]],
        [[  numberOfConfUlSPS-Processes-r13         INTEGER (1..8)  OPTIONAL    -- Need OR
        ]]
    }
}

N1PUCCH-AN-PersistentList ::=       SEQUENCE (SIZE (1..4)) OF INTEGER (0..2047)

-- ASN1STOP
```


DAINGEAN_0002173

SPS-Config field descriptions
implicitReleaseAfter Number of empty transmissions before implicit release, see TS 36.321 [6, 5.10.2]. Value e2 corresponds to 2 transmissions, e3 corresponds to 3 transmissions and so on.
n1PUCCH-AN-PersistentList , n1PUCCH-AN-PersistentListP1 List of parameter: $n_{\mathrm{PUCCH}}^{(1,p)}$ for antenna port P0 and for antenna port P1 respectively, see TS 36.213 [23, 10.1]. Field *n1-PUCCH-AN-PersistentListP1* is applicable only if the *twoAntennaPortActivatedPUCCH-Format1a1b* in *PUCCH-ConfigDedicated-v1020* is set to *true*. Otherwise the field is not configured.
numberOfConfSPS-Processes The number of configured HARQ processes for downlink Semi-Persistent Scheduling, see TS 36.321 [6].
numberOfConfUlSPS-Processes The number of configured HARQ processes for uplink Semi-Persistent Scheduling, see TS 36.321 [6]. E-UTRAN always configures this field for asynchronous UL HARQ. Otherwise it does not configure this field.
p0-NominalPUSCH-Persistent Parameter: $P_{\mathrm{O\_NOMINAL\_PUSCH}}(0)$. See TS 36.213 [23, 5.1.1.1], unit dBm step 1. This field is applicable for persistent scheduling, only. If choice setup is used and *p0-Persistent* is absent, apply the value of *p0-NominalPUSCH* for *p0-NominalPUSCH-Persistent.* If uplink power control subframe sets are configured by *tpc-SubframeSet*, this field applies for uplink power control subframe set 1.
p0-NominalPUSCH-PersistentSubframeSet2 Parameter: $P_{\mathrm{O\_NOMINAL\_PUSCH}}(0)$. See TS 36.213 [23, 5.1.1.1], unit dBm step 1. This field is applicable for persistent scheduling, only. If *p0-PersistentSubframeSet2-r12* is not configured, apply the value of *p0-NominalPUSCH-SubframeSet2-r12* for *p0-NominalPUSCH-PersistentSubframeSet2.* E-UTRAN configures this field only if uplink power control subframe sets are configured by *tpc-SubframeSet*, in which case this field applies for uplink power control subframe set 2.
p0-UE-PUSCH-Persistent Parameter: $P_{\mathrm{O\_UE\_PUSCH}}(0)$. See TS 36.213 [23, 5.1.1.1], unit dB. This field is applicable for persistent scheduling, only. If choice setup is used and *p0-Persistent* is absent, apply the value of p0-UE-PUSCH for *p0-UE-PUSCH-Persistent.* If uplink power control subframe sets are configured by *tpc-SubframeSet*, this field applies for uplink power control subframe set 1.
p0-UE-PUSCH-PersistentSubframeSet2 Parameter: $P_{\mathrm{O\_UE\_PUSCH}}(0)$. See TS 36.213 [23, 5.1.1.1], unit dB. This field is applicable for persistent scheduling, only. If *p0-PersistentSubframeSet2-r12* is not configured, apply the value of *p0-UE-PUSCH-SubframeSet2* for *p0-UE-PUSCH-PersistentSubframeSet2.* E-UTRAN configures this field only if uplink power control subframe sets are configured by *tpc-SubframeSet*, in which case this field applies for uplink power control subframe set 2.
semiPersistSchedC-RNTI Semi-persistent Scheduling C-RNTI, see TS 36.321 [6].
semiPersistSchedIntervalDL Semi-persistent scheduling interval in downlink, see TS 36.321 [6]. Value in number of sub-frames. Value sf10 corresponds to 10 sub-frames, sf20 corresponds to 20 sub-frames and so on. For TDD, the UE shall round this parameter down to the nearest integer (of 10 sub-frames), e.g. sf10 corresponds to 10 sub-frames, sf32 corresponds to 30 sub-frames, sf128 corresponds to 120 sub-frames.
semiPersistSchedIntervalUL Semi-persistent scheduling interval in uplink, see TS 36.321 [6]. Value in number of sub-frames. Value sf10 corresponds to 10 sub-frames, sf20 corresponds to 20 sub-frames and so on. For TDD, the UE shall round this parameter down to the nearest integer (of 10 sub-frames), e.g. sf10 corresponds to 10 sub-frames, sf32 corresponds to 30 sub-frames, sf128 corresponds to 120 sub-frames.
twoIntervalsConfig Trigger of two-intervals-Semi-Persistent Scheduling in uplink. See TS 36.321 [6, 5.10]. If this field is present, two-intervals-SPS is enabled for uplink. Otherwise, two-intervals-SPS is disabled.

Conditional presence	Explanation
TDD	This field is optional present for TDD, need OR; it is not present for FDD and the UE shall delete any existing value for this field.

– *TDD-Config*

The IE *TDD-Config* is used to specify the TDD specific physical channel configuration.

***TDD-Config* information element**

```
-- ASN1START
```


DAINGEAN_0002174

```
TDD-Config ::=                          SEQUENCE {
    subframeAssignment                      ENUMERATED {
                                                sa0, sa1, sa2, sa3, sa4, sa5, sa6},
    specialSubframePatterns                 ENUMERATED {
                                                ssp0, ssp1, ssp2, ssp3, ssp4,ssp5, ssp6, ssp7,
                                                ssp8}
}

TDD-Config-v1130 ::=                    SEQUENCE {
    specialSubframePatterns-v1130           ENUMERATED {ssp7,ssp9}
}

TDD-ConfigSL-r12 ::=            SEQUENCE {
    subframeAssignmentSL-r12                    ENUMERATED {
                                                none, sa0, sa1, sa2, sa3, sa4, sa5, sa6}
}

-- ASN1STOP
```

***TDD-Config* field descriptions**
specialSubframePatterns Indicates Configuration as in TS 36.211 [21, table 4.2-1] where *ssp0* points to Configuration 0, *ssp1* to Configuration 1 etc. Value *ssp7* points to Configuration 7 for extended cyclic prefix and value *ssp9* points to Configuration 9 for normal cyclic prefix. E-UTRAN signals *ssp7* only when setting *specialSubframePatterns* (without suffix i.e. the version defined in REL-8) to *ssp4*. E-UTRAN signals value *ssp9* only when setting *specialSubframePatterns* (without suffix) to *ssp5*. If *specialSubframePatterns-v1130* is present, the UE shall ignore *specialSubframePatterns* (without suffix).
subframeAssignment Indicates DL/UL subframe configuration where sa0 points to Configuration 0, sa1 to Configuration 1 etc. as specified in TS 36.211 [21, table 4.2-2]. E-UTRAN configures the same value for serving cells residing on same frequency band.
subframeAssignmentSL Indicates UL/ DL subframe configuration where sa0 points to Configuration 0, sa1 to Configuration 1 etc. as specified in TS 36.211 [21, table 4.2-2]. The value *none* means that no TDD specific physical channel configuration is applicable (i.e. the carrier on which *MasterInformationBlock-SL* is transmitted is an FDD UL carrier).

– *TimeAlignmentTimer*

The IE *TimeAlignmentTimer* is used to control how long the UE considers the serving cells belonging to the associated TAG to be uplink time aligned. Corresponds to the Timer for time alignment in TS 36.321 [6]. Value in number of sub-frames. Value sf500 corresponds to 500 sub-frames, sf750 corresponds to 750 sub-frames and so on.

TimeAlignmentTimer information element

```
-- ASN1START

TimeAlignmentTimer ::=                  ENUMERATED {
                                                sf500, sf750, sf1280, sf1920, sf2560, sf5120,
                                                sf10240, infinity}
-- ASN1STOP
```

– *TPC-PDCCH-Config*

The IE *TPC-PDCCH-Config* is used to specify the RNTIs and indexes for PUCCH and PUSCH power control according to TS 36.212 [22]. The power control function can either be setup or released with the IE.

TPC-PDCCH-Config information element

```
-- ASN1START

TPC-PDCCH-Config ::=                    CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        tpc-RNTI                            BIT STRING (SIZE (16)),
        tpc-Index                           TPC-Index
    }
}
```


DAINGEAN_0002175

```
TPC-PDCCH-ConfigSCell-r13 ::=                   CHOICE {
    release                                     NULL,
    setup                                       SEQUENCE {
        tpc-Index-PUCCH-SCell-r13               TPC-Index
    }
}

TPC-Index ::=                                   CHOICE {
    indexOfFormat3                                  INTEGER (1..15),
    indexOfFormat3A                                 INTEGER (1..31)
}

-- ASN1STOP
```

TPC-PDCCH-Config field descriptions
indexOfFormat3 Index of N when DCI format 3 is used. See TS 36.212 [22, 5.3.3.1.6].
IndexOfFormat3A Index of M when DCI format 3A is used. See TS 36.212 [22, 5.3.3.1.7].
tpc-Index Index of N or M, see TS 36.212 [22, 5.3.3.1.6 and 5.3.3.1.7], where N or M is dependent on the used DCI format (i.e. format 3 or 3a).
tpc-Index-PUCCH-SCell Index of N or M, see TS 36.212 [22, 5.3.3.1.6 and 5.3.3.1.7], where N or M is dependent on the used DCI format (i.e. format 3 or 3a).
tpc-RNTI RNTI for power control using DCI format 3/3A, see TS 36.212 [22].

– *TunnelConfigLWIP*

The IE *TunnelConfigLWIP* is used to setup/release LWIP Tunnel.

```
-- ASN1START

TunnelConfigLWIP-r13 ::= SEQUENCE {
    ip-Address-r13          IP-Address-r13,
    ike-Identity-r13            IKE-Identity-r13,
    ...,
    [[  lwip-Counter-r13    INTEGER (0..65535)      OPTIONAL    -- Cond LWIP-Setup
    ]]
}

IKE-Identity-r13 ::= SEQUENCE {
    idI-r13                 OCTET STRING
}

IP-Address-r13 ::= CHOICE {
    ipv4-r13                    BIT STRING (SIZE (32)),
    ipv6-r13                    BIT STRING (SIZE (128))
}

-- ASN1STOP
```

TunnelConfigLWIP field descriptions
ip-Address Parameter indicates the LWIP-SeGW IP Address to be used by the UE for initiating LWIP Tunnel establishment [32].
ike-Identity Parameter indicates the IKE Identity elements (IDi) to be used in IKE Authentication Procedures [32].
lwip-Counter Indicates the parameter used by UE for computing the security keys used in LWIP tunnel establishment, as specified in TS 33.401 [32].

Conditional presence	Explanation
LWIP-Setup	The field is mandatory present upon setup of LWIP tunnel. Otherwise the field is optional, Need ON.

DAINGEAN_0002176

– *UplinkPowerControl*

The IE *UplinkPowerControlCommon* and IE *UplinkPowerControlDedicated* are used to specify parameters for uplink power control in the system information and in the dedicated signalling, respectively.

***UplinkPowerControl* information elements**

```
-- ASN1START

UplinkPowerControlCommon ::=        SEQUENCE {
    p0-NominalPUSCH                     INTEGER (-126..24),
    alpha                               Alpha-r12,
    p0-NominalPUCCH                     INTEGER (-127..-96),
    deltaFList-PUCCH                    DeltaFList-PUCCH,
    deltaPreambleMsg3                   INTEGER (-1..6)
}

UplinkPowerControlCommon-v1020 ::=  SEQUENCE {
    deltaF-PUCCH-Format3-r10                ENUMERATED {deltaF-1, deltaF0, deltaF1, deltaF2,
                                                        deltaF3, deltaF4, deltaF5, deltaF6},
    deltaF-PUCCH-Format1bCS-r10             ENUMERATED {deltaF1, deltaF2, spare2, spare1}
}

UplinkPowerControlCommon-v1310 ::=  SEQUENCE {
    deltaF-PUCCH-Format4-r13            ENUMERATED {deltaF16, deltaF15, deltaF14,deltaF13, deltaF12,
                                        deltaF11, deltaF10, spare1}             OPTIONAL,   -- Need OR
    deltaF-PUCCH-Format5-13             ENUMERATED { deltaF13, deltaF12, deltaF11, deltaF10, deltaF9,
                                        deltaF8, deltaF7, spare1}               OPTIONAL    -- Need OR
}

UplinkPowerControlCommonPSCell-r12 ::=      SEQUENCE {
-- For uplink power control the additional/ missing fields are signalled (compared to SCell)
    deltaF-PUCCH-Format3-r12                ENUMERATED {deltaF-1, deltaF0, deltaF1, deltaF2,
                                                        deltaF3, deltaF4, deltaF5, deltaF6},
    deltaF-PUCCH-Format1bCS-r12             ENUMERATED {deltaF1, deltaF2, spare2, spare1},
    p0-NominalPUCCH-r12                     INTEGER (-127..-96),
    deltaFList-PUCCH-r12                    DeltaFList-PUCCH
}


UplinkPowerControlCommonSCell-r10 ::=   SEQUENCE {
    p0-NominalPUSCH-r10                 INTEGER (-126..24),
    alpha-r10                           Alpha-r12
}

UplinkPowerControlCommonSCell-v1130 ::= SEQUENCE {
    deltaPreambleMsg3-r11               INTEGER (-1..6)
}

UplinkPowerControlCommonSCell-v1310 ::= SEQUENCE {
-- For uplink power control the additional/ missing fields are signalled (compared to SCell)
    p0-NominalPUCCH                         INTEGER (-127..-96),
    deltaFList-PUCCH                        DeltaFList-PUCCH,
    deltaF-PUCCH-Format3-r12                ENUMERATED {deltaF-1, deltaF0, deltaF1,
                                            deltaF2, deltaF3, deltaF4, deltaF5,
                                            deltaF6}                        OPTIONAL,   -- Need OR
    deltaF-PUCCH-Format1bCS-r12             ENUMERATED {deltaF1, deltaF2,
                                            spare2, spare1}                 OPTIONAL,   -- Need OR
    deltaF-PUCCH-Format4-r13                ENUMERATED {deltaF16, deltaF15, deltaF14,
                                            deltaF13, deltaF12, deltaF11, deltaF10,
                                            spare1}                         OPTIONAL,   -- Need OR
    deltaF-PUCCH-Format5-13                 ENUMERATED { deltaF13, deltaF12, deltaF11,
                                            deltaF10, deltaF9, deltaF8, deltaF7,
                                            spare1}                         OPTIONAL    -- Need OR
}

UplinkPowerControlDedicated ::=     SEQUENCE {
    p0-UE-PUSCH                         INTEGER (-8..7),
    deltaMCS-Enabled                    ENUMERATED {en0, en1},
    accumulationEnabled                 BOOLEAN,
    p0-UE-PUCCH                         INTEGER (-8..7),
    pSRS-Offset                         INTEGER (0..15),
    filterCoefficient                   FilterCoefficient                   DEFAULT fc4
}

UplinkPowerControlDedicated-v1020 ::= SEQUENCE {
    deltaTxD-OffsetListPUCCH-r10        DeltaTxD-OffsetListPUCCH-r10        OPTIONAL,   -- Need OR
```


DAINGEAN_0002177

```
    pSRS-OffsetAp-r10                   INTEGER (0..15)                     OPTIONAL    -- Need OR
}

UplinkPowerControlDedicated-v1130 ::=       SEQUENCE {
    pSRS-Offset-v1130                       INTEGER (16..31)                OPTIONAL,   -- Need OR
    pSRS-OffsetAp-v1130                     INTEGER (16..31)                OPTIONAL,   -- Need OR
    deltaTxD-OffsetListPUCCH-v1130          DeltaTxD-OffsetListPUCCH-v1130  OPTIONAL    -- Need OR
}

UplinkPowerControlDedicated-v1250 ::=   SEQUENCE {
    set2PowerControlParameter       CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            tpc-SubframeSet-r12                 BIT STRING (SIZE(10)),
            p0-NominalPUSCH-SubframeSet2-r12        INTEGER (-126..24),
            alpha-SubframeSet2-r12              Alpha-r12,
            p0-UE-PUSCH-SubframeSet2-r12            INTEGER (-8..7)
        }
    }
}

UplinkPowerControlDedicatedSCell-r10 ::=        SEQUENCE {
    p0-UE-PUSCH-r10                     INTEGER (-8..7),
    deltaMCS-Enabled-r10                    ENUMERATED {en0, en1},
    accumulationEnabled-r10             BOOLEAN,
    pSRS-Offset-r10                     INTEGER (0..15),
    pSRS-OffsetAp-r10                   INTEGER (0..15)                     OPTIONAL,   -- Need OR
    filterCoefficient-r10               FilterCoefficient                   DEFAULT fc4,
    pathlossReferenceLinking-r10        ENUMERATED {pCell, sCell}
}

UplinkPowerControlDedicatedSCell-v1310 ::=  SEQUENCE {
--Release 8
    p0-UE-PUCCH                         INTEGER (-8..7),
--Release 10
    deltaTxD-OffsetListPUCCH-r10        DeltaTxD-OffsetListPUCCH-r10        OPTIONAL    -- Need OR
}

Alpha-r12 ::=                       ENUMERATED {al0, al04, al05, al06, al07, al08, al09, al1}

DeltaFList-PUCCH ::=                SEQUENCE {
    deltaF-PUCCH-Format1                ENUMERATED {deltaF-2, deltaF0, deltaF2},
    deltaF-PUCCH-Format1b               ENUMERATED {deltaF1, deltaF3, deltaF5},
    deltaF-PUCCH-Format2                ENUMERATED {deltaF-2, deltaF0, deltaF1, deltaF2},
    deltaF-PUCCH-Format2a               ENUMERATED {deltaF-2, deltaF0, deltaF2},
    deltaF-PUCCH-Format2b               ENUMERATED {deltaF-2, deltaF0, deltaF2}
}

DeltaTxD-OffsetListPUCCH-r10 ::=    SEQUENCE {
    deltaTxD-OffsetPUCCH-Format1-r10        ENUMERATED {dB0, dB-2},
    deltaTxD-OffsetPUCCH-Format1a1b-r10     ENUMERATED {dB0, dB-2},
    deltaTxD-OffsetPUCCH-Format22a2b-r10    ENUMERATED {dB0, dB-2},
    deltaTxD-OffsetPUCCH-Format3-r10        ENUMERATED {dB0, dB-2},
    ...

}

DeltaTxD-OffsetListPUCCH-v1130 ::=  SEQUENCE {
    deltaTxD-OffsetPUCCH-Format1bCS-r11     ENUMERATED {dB0, dB-1}
}

-- ASN1STOP
```


DAINGEAN_0002178

UplinkPowerControl field descriptions
accumulationEnabled Parameter: Accumulation-enabled, see TS 36.213 [23, 5.1.1.1]. TRUE corresponds to "enabled" whereas FALSE corresponds to "disabled".
alpha Parameter: α See TS 36.213 [23, 5.1.1.1] where al0 corresponds to 0, al04 corresponds to value 0.4, al05 to 0.5, al06 to 0.6, al07 to 0.7, al08 to 0.8, al09 to 0.9 and al1 corresponds to 1. This field applies for uplink power control subframe set 1 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
alpha-SubframeSet2 Parameter: α. See TS 36.213 [23, 5.1.1.1] where al0 corresponds to 0, al04 corresponds to value 0.4, al05 to 0.5, al06 to 0.6, al07 to 0.7, al08 to 0.8, al09 to 0.9 and al1 corresponds to 1. This field applies for uplink power control subframe set 2 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
deltaF-PUCCH-FormatX Parameter: $\Delta_{\text{F\_PUCCH}}(F)$ for the PUCCH formats 1, 1b, 2, 2a, 2b, 3, 4, 5 and 1b with channel selection. See TS 36.213 [23, 5.1.2] where deltaF-2 corresponds to -2 dB, deltaF0 corresponds to 0 dB and so on.
deltaMCS-Enabled Parameter: *Ks* See TS 36.213 [23, 5.1.1.1]. en0 corresponds to value 0 corresponding to state "disabled". en1 corresponds to value 1.25 corresponding to "enabled".
deltaPreambleMsg3 Parameter: $\Delta_{PREAMBLE\_Msg3}$ *see* TS 36.213 [23, 5.1.1.1]. Actual value = field value * 2 [dB].
deltaTxD-OffsetPUCCH-FormatX Parameter: $\Delta_{TxD}(F')$ for the PUCCH formats 1, 1a/1b, 1b with channel selection, 2/2a/2b and 3 when two antenna ports are configured for PUCCH transmission. See TS 36.213 [23, 5.1.2.1] where dB0 corresponds to 0 dB, dB-1 corresponds to -1 dB, dB-2 corresponds to -2 dB. EUTRAN configures the field *deltaTxD-OffsetPUCCH-Format1bCS-r11* for the PCell and/or the PSCell only.
filterCoefficient Specifies the filtering coefficient for RSRP measurements used to calculate path loss, as specified in TS 36.213 [23, 5.1.1.1]. The same filtering mechanism applies as for *quantityConfig* described in 5.5.3.2.
p0-NominalPUCCH Parameter: $P_{\text{O\_NOMINAL\_PUCCH}}$ See TS 36.213 [23, 5.1.2.1], unit dBm.
p0-NominalPUSCH Parameter: $P_{\text{O\_NOMINAL\_PUSCH}}(1)$ See TS 36.213 [23, 5.1.1.1], unit dBm. This field is applicable for non-persistent scheduling only. This field applies for uplink power control subframe set 1 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
p0-NominalPUSCH-SubframeSet2 Parameter: $P_{\text{O\_NOMINAL\_PUSCH}}(1)$. See TS 36.213 [23, 5.1.1.1], unit dBm. This field is applicable for non-persistent scheduling only. This field applies for uplink power control subframe set 2 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
p0-UE-PUCCH Parameter: $P_{\text{O\_UE\_PUCCH}}$ See TS 36.213 [23, 5.1.2.1]. Unit dB
p0-UE-PUSCH Parameter: $P_{\text{O\_UE\_PUSCH}}(1)$ See TS 36.213 [23, 5.1.1.1], unit dB. This field is applicable for non-persistent scheduling, only. This field applies for uplink power control subframe set 1 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
p0-UE-PUSCH-SubframeSet2 Parameter: $P_{\text{O\_UE\_PUSCH}}(1)$ See TS 36.213 [23, 5.1.1.1], unit dB. This field is applicable for non-persistent scheduling, only. This field applies for uplink power control subframe set 2 if uplink power control subframe sets are configured by *tpc-SubframeSet*.
pathlossReferenceLinking Indicates whether the UE shall apply as pathloss reference either the downlink of the PCell or of the SCell that corresponds with this uplink (i.e. according to the *cellIdentification* within the field *sCellToAddMod*). For SCells part of an STAG E-UTRAN sets the value to sCell.
pSRS-Offset, pSRS-OffsetAp Parameter: P_{SRS_OFFSET} for periodic and aperiodic sounding reference signal transmission repectively. See TS 36.213 [23, 5.1.3.1]. For Ks=1.25, the actual parameter value is pSRS-Offset value – 3. For Ks=0, the actual parameter value is -10.5 + 1.5*pSRS-Offset value. If *pSRS-Offset-v1130* is included, the UE ignores *pSRS-Offset* (i.e., without suffix). Likewise, if *pSRS-OffsetAp-v1130* is included, the UE ignores *pSRS-OffsetAp-r10*. For Ks=0, E-UTRAN does not set values larger than 26.

DAINGEAN_0002179

UplinkPowerControl field descriptions
tpc-SubframeSet
Indicates the uplink subframes (including UpPTS in special subframes) of the uplink power control subframe sets. Value 0 means the subframe belongs to uplink power control subframe set 1, and value 1 means the subframe belongs to uplink power control subframe set 2.

– *WLAN-Id-List*

The IE *WLAN-Id-List* is used to list WLAN(s) for configuration of WLAN measurements and WLAN mobility set.

```
-- ASN1START

WLAN-Id-List-r13 ::=                SEQUENCE (SIZE (1..maxWLAN-Id-r13)) OF WLAN-Identifiers-r12

-- ASN1STOP
```

– *WLAN-MobilityConfig*

The IE *WLAN-MobilityConfig* is used for configuration of WLAN mobility set and WLAN Status Reporting.

```
-- ASN1START

WLAN-MobilityConfig-r13 ::=     SEQUENCE {
    wlan-ToReleaseList-r13              WLAN-Id-List-r13            OPTIONAL,   -- Need ON
    wlan-ToAddList-r13                  WLAN-Id-List-r13            OPTIONAL,   -- Need ON
    associationTimer-r13                ENUMERATED {s10, s30,
                                         s60, s120, s240}           OPTIONAL,   -- Need OR
    successReportRequested-r13          ENUMERATED {true}           OPTIONAL,   -- Need OR
    ...
}

-- ASN1STOP
```

WLAN-MobilityConfig field descriptions
associationTimer
Indicates the maximum time for connection to WLAN before connection failure reporting is initiated.
successReportRequested
Indicates whether the UE should report successful connection to WLAN. Applicable to LWA and LWIP.
wlan-ToAddList
Indicates the WLAN identifiers to be added to the WLAN mobility set.
wlan-ToReleaseList
Indicates the WLAN identifiers to be removed the WLAN mobility set.

6.3.3 Security control information elements

– *NextHopChainingCount*

The IE *NextHopChainingCount* is used to update the K_{eNB} key and corresponds to parameter NCC: See TS 33.401 [32, 7.2.8.4].

***NextHopChainingCount* information element**

```
-- ASN1START

NextHopChainingCount ::=                    INTEGER (0..7)

-- ASN1STOP
```


DAINGEAN_0002180

– *SecurityAlgorithmConfig*

The IE *SecurityAlgorithmConfig* is used to configure AS integrity protection algorithm (SRBs) and AS ciphering algorithm (SRBs and DRBs). For RNs, the IE *SecurityAlgorithmConfig* is also used to configure AS integrity protection algorithm for DRBs between the RN and the E-UTRAN.

SecurityAlgorithmConfig information element

```
-- ASN1START

SecurityAlgorithmConfig ::=          SEQUENCE {
    cipheringAlgorithm                   CipheringAlgorithm-r12,
    integrityProtAlgorithm               ENUMERATED {
                                             eia0-v920, eia1, eia2, eia3-v1130, spare4, spare3,
                                             spare2, spare1, ...}
}

CipheringAlgorithm-r12 ::=               ENUMERATED {
                                             eea0, eea1, eea2, eea3-v1130, spare4, spare3,
                                             spare2, spare1, ...}

-- ASN1STOP
```

***SecurityAlgorithmConfig* field descriptions**
cipheringAlgorithm
Indicates the ciphering algorithm to be used for SRBs and DRBs, as specified in TS 33.401 [32, 5.1.3.2].
integrityProtAlgorithm
Indicates the integrity protection algorithm to be used for SRBs, as specified in TS 33.401 [32, 5.1.4.2]. For RNs, also indicates the integrity protection algorithm to be used for integrity protection-enabled DRB(s).

– *ShortMAC-I*

The IE *ShortMAC-I* is used to identify and verify the UE at RRC connection re-establishment. The 16 least significant bits of the MAC-I calculated using the security configuration of the source PCell, as specified in 5.3.7.4.

ShortMAC-I information element

```
-- ASN1START

ShortMAC-I ::=                       BIT STRING (SIZE (16))

-- ASN1STOP
```

6.3.4 Mobility control information elements

– *AdditionalSpectrumEmission*

AdditionalSpectrumEmission information element

```
-- ASN1START

AdditionalSpectrumEmission ::=       INTEGER (1..32)

-- ASN1STOP
```

– *ARFCN-ValueCDMA2000*

The IE *ARFCN-ValueCDMA2000* used to indicate the CDMA2000 carrier frequency within a CDMA2000 band, see C.S0002 [12].

ARFCN-ValueCDMA2000 information element

```
-- ASN1START
```


DAINGEAN_0002181

```
ARFCN-ValueCDMA2000 ::=         INTEGER (0..2047)

-- ASN1STOP
```

– *ARFCN-ValueEUTRA*

The IE *ARFCN-ValueEUTRA* is used to indicate the ARFCN applicable for a downlink, uplink or bi-directional (TDD) E-UTRA carrier frequency, as defined in TS 36.101 [42]. If an extension is signalled using the extended value range (as defined by IE *ARFCN-ValueEUTRA-v9e0*), the UE shall only consider this extension (and hence ignore the corresponding original field, using the value range as defined by IE *ARFCN-ValueEUTRA* i.e. without suffix, if signalled). In dedicated signalling, E-UTRAN only provides an EARFCN corresponding to an E-UTRA band supported by the UE.

ARFCN-ValueEUTRA information element

```
-- ASN1START

ARFCN-ValueEUTRA ::=                INTEGER (0..maxEARFCN)

ARFCN-ValueEUTRA-v9e0 ::=           INTEGER (maxEARFCN-Plus1..maxEARFCN2)

ARFCN-ValueEUTRA-r9 ::=             INTEGER (0..maxEARFCN2)

-- ASN1STOP
```

NOTE: For fields using the original value range, as defined by IE *ARFCN-ValueEUTRA* i.e. without suffix, value *maxEARFCN* indicates that the E-UTRA carrier frequency is indicated by means of an extension. In such a case, UEs not supporting the extension consider the field to be set to a not supported value.

– *ARFCN-ValueGERAN*

The IE *ARFCN-ValueGERAN* is used to specify the ARFCN value applicable for a GERAN BCCH carrier frequency, see TS 45.005 [20].

ARFCN-ValueGERAN information element

```
-- ASN1START

ARFCN-ValueGERAN ::=            INTEGER (0..1023)

-- ASN1STOP
```

– *ARFCN-ValueUTRA*

The IE *ARFCN-ValueUTRA* is used to indicate the ARFCN applicable for a downlink (Nd, FDD) or bi-directional (Nt, TDD) UTRA carrier frequency, as defined in TS 25.331 [19].

ARFCN-ValueUTRA information element

```
-- ASN1START

ARFCN-ValueUTRA ::=                 INTEGER (0..16383)

-- ASN1STOP
```

– *BandclassCDMA2000*

The IE *BandclassCDMA2000* is used to define the CDMA2000 band in which the CDMA2000 carrier frequency can be found, as defined in C.S0057 [24, table 1.5-1].

DAINGEAN_0002182

BandclassCDMA2000 information element

```
-- ASN1START

BandclassCDMA2000 ::=                   ENUMERATED {
                                            bc0, bc1, bc2, bc3, bc4, bc5, bc6, bc7, bc8,
                                            bc9, bc10, bc11, bc12, bc13, bc14, bc15, bc16,
                                            bc17, bc18-v9a0, bc19-v9a0, bc20-v9a0, bc21-v9a0,
                                            spare10, spare9, spare8, spare7, spare6, spare5, spare4,
                                            spare3, spare2, spare1, ...}

-- ASN1STOP
```

– BandIndicatorGERAN

The IE *BandIndicatorGERAN* indicates how to interpret an associated GERAN carrier ARFCN, see TS 45.005 [20]. More specifically, the IE indicates the GERAN frequency band in case the ARFCN value can concern either a DCS 1800 or a PCS 1900 carrier frequency. For ARFCN values not associated with one of these bands, the indicator has no meaning.

BandIndicatorGERAN information element

```
-- ASN1START

BandIndicatorGERAN ::=          ENUMERATED {dcs1800, pcs1900}

-- ASN1STOP
```

– CarrierFreqCDMA2000

The IE *CarrierFreqCDMA2000* used to provide the CDMA2000 carrier information.

CarrierFreqCDMA2000 information element

```
-- ASN1START

CarrierFreqCDMA2000 ::=         SEQUENCE {
    bandClass                           BandclassCDMA2000,
    arfcn                           ARFCN-ValueCDMA2000
}

-- ASN1STOP
```

– CarrierFreqGERAN

The IE *CarrierFreqGERAN* is used to provide an unambiguous carrier frequency description of a GERAN cell.

CarrierFreqGERAN information element

```
-- ASN1START

CarrierFreqGERAN ::=            SEQUENCE {
    arfcn                           ARFCN-ValueGERAN,
    bandIndicator                   BandIndicatorGERAN
}

-- ASN1STOP
```

CarrierFreqGERAN field descriptions
arfcn   GERAN ARFCN of BCCH carrier.
bandIndicator   Indicates how to interpret the ARFCN of the BCCH carrier.

DAINGEAN_0002183

– CarrierFreqsGERAN

The IE *CarrierFreqListGERAN* is used to provide one or more GERAN ARFCN values, as defined in TS 44.005 [43], which represents a list of GERAN BCCH carrier frequencies.

CarrierFreqsGERAN information element

```
-- ASN1START

CarrierFreqsGERAN ::=           SEQUENCE {
    startingARFCN                       ARFCN-ValueGERAN,
    bandIndicator                       BandIndicatorGERAN,
    followingARFCNs                     CHOICE {
        explicitListOfARFCNs                ExplicitListOfARFCNs,
        equallySpacedARFCNs                 SEQUENCE {
            arfcn-Spacing                       INTEGER (1..8),
            numberOfFollowingARFCNs             INTEGER (0..31)
        },
        variableBitMapOfARFCNs              OCTET STRING (SIZE (1..16))
    }
}

ExplicitListOfARFCNs ::=            SEQUENCE (SIZE (0..31)) OF ARFCN-ValueGERAN

-- ASN1STOP
```

***CarrierFreqsGERAN* field descriptions**
arfcn-Spacing Space, d, between a set of equally spaced ARFCN values.
bandIndicator Indicates how to interpret the ARFCN of the BCCH carrier.
explicitListOfARFCNs The remaining ARFCN values in the set are explicitly listed one by one.
followingARFCNs Field containing a representation of the remaining ARFCN values in the set.
numberOfFollowingARFCNs The number, n, of the remaining equally spaced ARFCN values in the set. The complete set of (n+1) ARFCN values is defined as: {s, ((s + d) mod 1024), ((s + 2*d) mod 1024) ... ((s + n*d) mod 1024)}.
startingARFCN The first ARFCN value, s, in the set.
variableBitMapOfARFCNs Bitmap field representing the remaining ARFCN values in the set. The leading bit of the first octet in the bitmap corresponds to the ARFCN = ((s + 1) mod 1024), the next bit to the ARFCN = ((s + 2) mod 1024), and so on. If the bitmap consist of N octets, the trailing bit of octet N corresponds to ARFCN = ((s + 8*N) mod 1024). The complete set of ARFCN values consists of ARFCN = s and the ARFCN values, where the corresponding bit in the bitmap is set to "1".

– CarrierFreqListMBMS

The IE *CarrierFreqListMBMS* is used to indicate the E-UTRA ARFCN values of the one or more MBMS frequencies the UE is interested to receive.

CarrierFreqListMBMS information element

```
-- ASN1START

CarrierFreqListMBMS-r11 ::=     SEQUENCE (SIZE (1..maxFreqMBMS-r11)) OF ARFCN-ValueEUTRA-r9

-- ASN1STOP
```

– CDMA2000-Type

The IE *CDMA2000-Type* is used to describe the type of CDMA2000 network.

DAINGEAN_0002184

CDMA2000-Type information element

```
-- ASN1START

CDMA2000-Type ::=                   ENUMERATED {type1XRTT, typeHRPD}

-- ASN1STOP
```

– CellIdentity

The IE *CellIdentity* is used to unambiguously identify a cell within a PLMN.

CellIdentity information element

```
-- ASN1START

CellIdentity ::=                    BIT STRING (SIZE (28))

-- ASN1STOP
```

– CellIndexList

The IE *CellIndexList* concerns a list of cell indices, which may be used for different purposes.

CellIndexList information element

```
-- ASN1START

CellIndexList ::=                       SEQUENCE (SIZE (1..maxCellMeas)) OF CellIndex

CellIndex ::=                           INTEGER (1..maxCellMeas)

-- ASN1STOP
```

– CellReselectionPriority

The IE *CellReselectionPriority* concerns the absolute priority of the concerned carrier frequency/ set of frequencies (GERAN)/ bandclass (CDMA2000), as used by the cell reselection procedure. Corresponds with parameter "priority" in TS 36.304 [4]. Value 0 means: lowest priority. The UE behaviour for the case the field is absent, if applicable, is specified in TS 36.304 [4].

CellReselectionPriority information element

```
-- ASN1START

CellReselectionPriority ::=             INTEGER (0..7)

-- ASN1STOP
```

– CellSelectionInfoCE

The IE *CellSelectionInfoCE* contains cell selection information for CE. The *q-RxLevMinCE* corresponds to parameter $Q_{rxlevmin\_CE}$ in TS 36.304 [4]. The *q-QualMinRSRQ-CE* corresponds to parameter $Q_{qualmin\_CE}$ in TS 36.304 [4]. If *q-QualMinRSRQ-CE* is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$.

CellSelectionInfoCE information element

```
-- ASN1START

CellSelectionInfoCE-r13 ::=     SEQUENCE {
    q-RxLevMinCE-r13                Q-RxLevMin,
    q-QualMinRSRQ-CE-r13            Q-QualMin-r9                    OPTIONAL    -- Need OR
}
```


DAINGEAN_0002185

```
-- ASN1STOP
```

– CellReselectionSubPriority

The IE *CellReselectionSubPriority* indicates a fractional value to be added to the value of cellReselectionPriority to obtain the absolute priority of the concerned carrier frequency for E-UTRA. Value oDot2 corresponds to 0.2, oDot4 corresponds to 0.4 and so on.

CellReselectionSubPriority information element

```
-- ASN1START

CellReselectionSubPriority-r13 ::=          ENUMERATED {oDot2, oDot4, oDot6, oDot8}

-- ASN1STOP
```

– CSFB-RegistrationParam1XRTT

The IE *CSFB-RegistrationParam1XRTT* is used to indicate whether or not the UE shall perform a CDMA2000 1xRTT pre-registration if the UE does not have a valid / current pre-registration.

```
-- ASN1START

CSFB-RegistrationParam1XRTT ::=     SEQUENCE {
    sid                                 BIT STRING (SIZE (15)),
    nid                                 BIT STRING (SIZE (16)),
    multipleSID                         BOOLEAN,
    multipleNID                         BOOLEAN,
    homeReg                             BOOLEAN,
    foreignSIDReg                       BOOLEAN,
    foreignNIDReg                       BOOLEAN,
    parameterReg                        BOOLEAN,
    powerUpReg                          BOOLEAN,
    registrationPeriod                  BIT STRING (SIZE (7)),
    registrationZone                    BIT STRING (SIZE (12)),
    totalZone                           BIT STRING (SIZE (3)),
    zoneTimer                           BIT STRING (SIZE (3))
}

CSFB-RegistrationParam1XRTT-v920 ::=    SEQUENCE {
    powerDownReg-r9                     ENUMERATED {true}
}

-- ASN1STOP
```


DAINGEAN_0002186

CSFB-RegistrationParam1XRTT field descriptions
foreignNIDReg The CDMA2000 1xRTT NID roamer registration indicator.
foreignSIDReg The CDMA2000 1xRTT SID roamer registration indicator.
homeReg The CDMA2000 1xRTT Home registration indicator.
multipleNID The CDMA2000 1xRTT Multiple NID storage indicator.
multipleSID The CDMA2000 1xRTT Multiple SID storage indicator.
nid Used along with the *sid* as a pair to control when the UE should Register or Re-Register with the CDMA2000 1xRTT network.
parameterReg The CDMA2000 1xRTT Parameter-change registration indicator.
powerDownReg The CDMA2000 1xRTT Power-down registration indicator. If set to TRUE, the UE that has a valid / current CDMA2000 1xRTT pre-registration will perform a CDMA2000 1xRTT power down registration when it is switched off.
powerUpReg The CDMA2000 1xRTT Power-up registration indicator.
registrationPeriod The CDMA2000 1xRTT Registration period.
registrationZone The CDMA2000 1xRTT Registration zone.
sid Used along with the *nid* as a pair to control when the UE should Register or Re-Register with the CDMA2000 1xRTT network.
totalZone The CDMA2000 1xRTT Number of registration zones to be retained.
zoneTimer The CDMA2000 1xRTT Zone timer length.

– *CellGlobalIdEUTRA*

The IE *CellGlobalIdEUTRA* specifies the Evolved Cell Global Identifier (ECGI), the globally unique identity of a cell in E-UTRA.

CellGlobalIdEUTRA information element

```
-- ASN1START

CellGlobalIdEUTRA ::=               SEQUENCE {
    plmn-Identity                       PLMN-Identity,
    cellIdentity                        CellIdentity
}

-- ASN1STOP
```

CellGlobalIdEUTRA field descriptions
cellIdentity Identity of the cell within the context of the PLMN.
plmn-Identity Identifies the PLMN of the cell as given by the first PLMN entry in the *plmn-IdentityList* in *SystemInformationBlockType1*.

– *CellGlobalIdUTRA*

The IE *CellGlobalIdUTRA* specifies the global UTRAN Cell Identifier, the globally unique identity of a cell in UTRA.

CellGlobalIdUTRA information element

```
-- ASN1START
```


DAINGEAN_0002187

```
CellGlobalIdUTRA ::=                SEQUENCE {
    plmn-Identity                       PLMN-Identity,
    cellIdentity                        BIT STRING (SIZE (28))
}

-- ASN1STOP
```

CellGlobalIdUTRA field descriptions
cellIdentity
UTRA Cell Identifier which is unique within the context of the identified PLMN as defined in TS 25.331 [19].
plmn-Identity
Identifies the PLMN of the cell as given by the common PLMN broadcast in the MIB, as defined in TS 25.331 [19].

– *CellGlobalIdGERAN*

The IE *CellGlobalIdGERAN* specifies the Cell Global Identification (CGI), the globally unique identity of a cell in GERAN.

CellGlobalIdGERAN information element

```
-- ASN1START

CellGlobalIdGERAN ::=               SEQUENCE {
    plmn-Identity                       PLMN-Identity,
    locationAreaCode                    BIT STRING (SIZE (16)),
    cellIdentity                    BIT STRING (SIZE (16))
}

-- ASN1STOP
```

CellGlobalIdGERAN field descriptions
cellIdentity
Cell Identifier which is unique within the context of the GERAN location area as defined in TS 23.003 [27].
locationAreaCode
A fixed length code identifying the location area within a PLMN as defined in TS 23.003 [27].
plmn-Identity
Identifies the PLMN of the cell, as defined in TS 23.003 [27]..

– *CellGlobalIdCDMA2000*

The IE *CellGlobalIdCDMA2000* specifies the Cell Global Identification (CGI), the globally unique identity of a cell in CDMA2000.

CellGlobalIdCDMA2000 information element

```
-- ASN1START

CellGlobalIdCDMA2000 ::=            CHOICE {
    cellGlobalId1XRTT                   BIT STRING (SIZE (47)),
    cellGlobalIdHRPD                    BIT STRING (SIZE (128))
}

-- ASN1STOP
```

CellGlobalIdCDMA2000 field descriptions
cellGlobalId1XRTT
Unique identifier for a CDMA2000 1xRTT cell, corresponds to BASEID, SID and NID parameters (in that order) defined in C.S0005 [25].
cellGlobalIdHRPD
Unique identifier for a CDMA2000 HRPD cell, corresponds to SECTOR ID parameter defined in C.S0024 [26, 14.9].

DAINGEAN_0002188

– CellSelectionInfoNFreq

The IE *CellSelectionInfoNFreq* includes the parameters used for cell selection on a neighbouring frequency, see TS 36.304 [4].

CellSelectionInfoNFreq information element

```
-- ASN1START

CellSelectionInfoNFreq-r13 ::=  SEQUENCE {
    -- Cell selection information as in SIB1
    q-RxLevMin-r13                  Q-RxLevMin,
    q-RxLevMinOffset                    INTEGER (1..8)          OPTIONAL,   -- Need OP
    -- Cell re-selection information as in SIB3
    q-Hyst-r13                          ENUMERATED {
                                            dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10,
                                            dB12, dB14, dB16, dB18, dB20, dB22, dB24},
    q-RxLevMinReselection-r13           Q-RxLevMin,
    t-ReselectionEUTRA-r13              T-Reselection
}

-- ASN1STOP
```

– CSG-Identity

The IE *CSG-Identity* is used to identify a Closed Subscriber Group.

CSG-Identity information element

```
-- ASN1START

CSG-Identity ::=                    BIT STRING (SIZE (27))

-- ASN1STOP
```

– FreqBandIndicator

The IE *FreqBandIndicator* indicates the E-UTRA operating band as defined in TS 36.101 [42, table 5.5-1]. If an extension is signalled using the extended value range (as defined by IE *FreqBandIndicator-v9e0*), the UE shall only consider this extension (and hence ignore the corresponding original field, using the value range as defined by IE *FreqBandIndicator* i.e. without suffix, if signalled).

FreqBandIndicator information element

```
-- ASN1START

FreqBandIndicator ::=               INTEGER (1..maxFBI)

FreqBandIndicator-v9e0 ::=          INTEGER (maxFBI-Plus1..maxFBI2)

FreqBandIndicator-r11 ::=           INTEGER (1..maxFBI2)

-- ASN1STOP
```

NOTE: For fields using the original value range, as defined by IE *FreqBandIndicator* i.e. without suffix, value *maxFBI* indicates that the frequency band is indicated by means of an extension. In such a case, UEs not supporting the extension consider the field to be set to a not supported value.

– MobilityControlInfo

The IE *MobilityControlInfo* includes parameters relevant for network controlled mobility to/within E-UTRA.

DAINGEAN_0002189

MobilityControlInfo information element

```
-- ASN1START

MobilityControlInfo ::=     SEQUENCE {
    targetPhysCellId                    PhysCellId,
    carrierFreq                         CarrierFreqEUTRA                    OPTIONAL,   -- Cond HO-
toEUTRA2
    carrierBandwidth                    CarrierBandwidthEUTRA               OPTIONAL,   -- Cond HO-
toEUTRA
    additionalSpectrumEmission          AdditionalSpectrumEmission          OPTIONAL,   -- Cond HO-
toEUTRA
    t304                                ENUMERATED {
                                            ms50, ms100, ms150, ms200, ms500, ms1000,
                                            ms2000, ms10000-v1310},
    newUE-Identity                      C-RNTI,
    radioResourceConfigCommon           RadioResourceConfigCommon,
    rach-ConfigDedicated                RACH-ConfigDedicated                OPTIONAL,   -- Need OP
    ...,
    [[  carrierFreq-v9e0                CarrierFreqEUTRA-v9e0               OPTIONAL    -- Need ON
    ]],
    [[  drb-ContinueROHC-r11            ENUMERATED {true}                   OPTIONAL    -- Cond HO
    ]]
}

MobilityControlInfoSCG-r12 ::=      SEQUENCE {
    t307-r12                            ENUMERATED {
                                            ms50, ms100, ms150, ms200, ms500, ms1000,
                                            ms2000, spare1},
    ue-IdentitySCG-r12                  C-RNTI                          OPTIONAL,   -- Cond SCGEst,
    rach-ConfigDedicated-r12            RACH-ConfigDedicated            OPTIONAL,   -- Need OP
    cipheringAlgorithmSCG-r12       CipheringAlgorithm-r12      OPTIONAL,   -- Need ON
    ...
}

CarrierBandwidthEUTRA ::=           SEQUENCE {
    dl-Bandwidth                        ENUMERATED {
                                                n6, n15, n25, n50, n75, n100, spare10,
                                                spare9, spare8, spare7, spare6, spare5,
                                                spare4, spare3, spare2, spare1},
    ul-Bandwidth                        ENUMERATED {
                                                n6, n15, n25, n50, n75, n100, spare10,
                                                spare9, spare8, spare7, spare6, spare5,
                                                spare4, spare3, spare2, spare1} OPTIONAL -- Need OP
}

CarrierFreqEUTRA ::=                SEQUENCE {
    dl-CarrierFreq                      ARFCN-ValueEUTRA,
    ul-CarrierFreq                      ARFCN-ValueEUTRA                OPTIONAL    -- Cond FDD
}

CarrierFreqEUTRA-v9e0 ::=           SEQUENCE {
    dl-CarrierFreq-v9e0                 ARFCN-ValueEUTRA-r9,
    ul-CarrierFreq-v9e0                 ARFCN-ValueEUTRA-r9         OPTIONAL    -- Cond FDD
}

-- ASN1STOP
```


DAINGEAN_0002190

***MobilityControlInfo* field descriptions**
additionalSpectrumEmission For a UE with no SCells configured for UL in the same band as the PCell, the UE shall apply the value for the PCell instead of the corresponding value from *SystemInformationBlockType2* or *SystemInformationBlockType1*. For a UE with SCell(s) configured for UL in the same band as the PCell, the UE shall, in case all SCells configured for UL in that band are released after handover completion, apply the value for the PCell instead of the corresponding value from *SystemInformationBlockType2* or *SystemInformationBlockType1*. The UE requirements related to IE *AdditionalSpectrumEmission* are defined in TS 36.101 [42, table 6.2.4-1].
carrierBandwidth Provides the parameters *Downlink bandwidth*, and *Uplink bandwidth*, see TS 36.101 [42].
carrierFreq Provides the EARFCN to be used by the UE in the target cell.
cipheringAlgorithmSCG Indicates the ciphering algorithm to be used for SCG DRBs. E-UTRAN includes the field upon SCG change when one or more SCG DRBs are configured. Otherwise E-UTRAN does not include the field.
dl-Bandwidth Parameter: *Downlink bandwidth*, see TS 36.101 [42].
drb-ContinueROHC This field indicates whether to continue or reset, for this handover, the header compression protocol context for the RLC UM bearers configured with the header compression protocol. Presence of the field indicates that the header compression protocol context continues while absence indicates that the header compression protocol context is reset. E-UTRAN includes the field only in case of a handover within the same eNB.
rach-ConfigDedicated The dedicated random access parameters. If absent the UE applies contention based random access as specified in TS 36.321 [6].
t304 Timer T304 as described in section 7.3. ms50 corresponds with 50 ms, ms100 corresponds with 100 ms and so on. EUTRAN includes extended value *ms10000-v1310* only when UE supports CE.
t307 Timer T307 as described in section 7.3. ms50 corresponds with 50 ms, ms100 corresponds with 100 ms and so on.
ul-Bandwidth Parameter: *Uplink bandwidth*, see TS 36.101 [42, table 5.6-1]. For TDD, the parameter is absent and it is equal to downlink bandwidth. If absent for FDD, apply the same value as applies for the downlink bandwidth.

Conditional presence	Explanation
FDD	The field is mandatory with default value (the default duplex distance defined for the concerned band, as specified in TS 36.101 [42]) in case of "FDD"; otherwise the field is not present.
HO	This field is optionally present, need OP, in case of handover within E-UTRA when the *fullConfig* is not included; otherwise the field is not present.
HO-toEUTRA	The field is mandatory present in case of inter-RAT handover to E-UTRA; otherwise the field is optionally present, need ON.
HO-toEUTRA2	The field is absent if *carrierFreq-v9e0* is present. Otherwise it is mandatory present in case of inter-RAT handover to E-UTRA and optionally present, need ON, in all other cases.
SCGEst	This field is mandatory present in case of SCG establishment; otherwise the field is optionally present, need ON.

– *MobilityParametersCDMA2000 (1xRTT)*

The *MobilityParametersCDMA2000* contains the parameters provided to the UE for handover and (enhanced) CSFB to 1xRTT support, as defined in C.S0097 [53].

***MobilityParametersCDMA2000* information element**

```
-- ASN1START

MobilityParametersCDMA2000 ::=          OCTET STRING

-- ASN1STOP
```


DAINGEAN_0002191

– *MobilityStateParameters*

The IE *MobilityStateParameters* contains parameters to determine UE mobility state.

MobilityStateParameters information element

```
-- ASN1START

MobilityStateParameters ::=         SEQUENCE {
    t-Evaluation                        ENUMERATED {
                                            s30, s60, s120, s180, s240, spare3, spare2, spare1},
    t-HystNormal                        ENUMERATED {
                                            s30, s60, s120, s180, s240, spare3, spare2, spare1},
    n-CellChangeMedium                  INTEGER (1..16),
    n-CellChangeHigh                    INTEGER (1..16)
}

-- ASN1STOP
```

MobilityStateParameters field descriptions
n-CellChangeHigh
The number of cell changes to enter high mobility state. Corresponds to N_{CR_H} in TS 36.304 [4].
n-CellChangeMedium
The number of cell changes to enter medium mobility state. Corresponds to N_{CR_M} in TS 36.304 [4].
t-Evaluation
The duration for evaluating criteria to enter mobility states. Corresponds to T_{CRmax} in TS 36.304 [4]. Value in seconds, s30 corresponds to 30 s and so on.
t-HystNormal
The additional duration for evaluating criteria to enter normal mobility state. Corresponds to $T_{CRmaxHyst}$ in TS 36.304 [4]. Value in seconds, s30 corresponds to 30 s and so on.

– *MultiBandInfoList*

MultiBandInfoList information element

```
-- ASN1START

MultiBandInfoList ::=   SEQUENCE (SIZE (1..maxMultiBands)) OF FreqBandIndicator

MultiBandInfoList-v9e0 ::=  SEQUENCE (SIZE (1..maxMultiBands)) OF MultiBandInfo-v9e0

MultiBandInfoList-v10j0 ::= SEQUENCE (SIZE (1..maxMultiBands)) OF NS-PmaxList-r10

MultiBandInfoList-r11 ::=   SEQUENCE (SIZE (1..maxMultiBands)) OF FreqBandIndicator-r11

MultiBandInfo-v9e0 ::=      SEQUENCE {
    freqBandIndicator-v9e0              FreqBandIndicator-v9e0      OPTIONAL    -- Need OP
}

-- ASN1STOP
```

– *NS-PmaxList*

The IE *NS-PmaxList* concerns a list of *additionalPmax* and *additionalSpectrumEmission* as defined in TS 36.101 [42, table 6.2.4-1] for a given frequency band. E-UTRAN does not include the same value of *additionalSpectrumEmission* in *SystemInformationBlockType2* within this list.

NS-PmaxList information element

```
-- ASN1START

NS-PmaxList-r10 ::=             SEQUENCE (SIZE (1..maxNS-Pmax-r10)) OF NS-PmaxValue-r10

NS-PmaxValue-r10 ::=            SEQUENCE {
    additionalPmax-r10                  P-Max                           OPTIONAL,   -- Need OP
    additionalSpectrumEmission          AdditionalSpectrumEmission
}
```


DAINGEAN_0002192

```
-- ASN1STOP
```

– PhysCellId

The IE *PhysCellId* is used to indicate the physical layer identity of the cell, as defined in TS 36.211 [21].

PhysCellId information element

```
-- ASN1START

PhysCellId ::=                  INTEGER (0..503)

-- ASN1STOP
```

– PhysCellIdRange

The IE *PhysCellIdRange* is used to encode either a single or a range of physical cell identities. The range is encoded by using a *start* value and by indicating the number of consecutive physical cell identities (including *start*) in the range. For fields comprising multiple occurrences of *PhysCellIdRange*, E-UTRAN may configure overlapping ranges of physical cell identities.

PhysCellIdRange information element

```
-- ASN1START

PhysCellIdRange ::=             SEQUENCE {
    start                           PhysCellId,
    range                           ENUMERATED {
                                        n4, n8, n12, n16, n24, n32, n48, n64, n84,
                                        n96, n128, n168, n252, n504, spare2,
                                        spare1}                     OPTIONAL    -- Need OP
}

-- ASN1STOP
```

PhysCellIdRange field descriptions

range
Indicates the number of physical cell identities in the range (including *start*). Value n4 corresponds with 4, n8 corresponds with 8 and so on. The UE shall apply value 1 in case the field is absent, in which case only the physical cell identity value indicated by *start* applies.

start
Indicates the lowest physical cell identity in the range.

– PhysCellIdRangeUTRA-FDDList

The IE *PhysCellIdRangeUTRA-FDDList* is used to encode one or more of *PhysCellIdRangeUTRA-FDD*. While the IE *PhysCellIdRangeUTRA-FDD* is used to encode either a single physical layer identity or a range of physical layer identities, i.e. primary scrambling codes. Each range is encoded by using a *start* value and by indicating the number of consecutive physical cell identities (including *start*) in the range.

PhysCellIdRangeUTRA-FDDList information element

```
-- ASN1START

PhysCellIdRangeUTRA-FDDList-r9::=       SEQUENCE (SIZE (1..maxPhysCellIdRange-r9)) OF
PhysCellIdRangeUTRA-FDD-r9

PhysCellIdRangeUTRA-FDD-r9 ::=          SEQUENCE {
        start-r9                            PhysCellIdUTRA-FDD,
        range-r9                            INTEGER (2..512)                OPTIONAL    -- Need OP
}

-- ASN1STOP
```


DAINGEAN_0002193

***PhysCellIdRangeUTRA-FDDList* field descriptions**
range
Indicates the number of primary scrambling codes in the range (including *start*). The UE shall apply value 1 in case the field is absent, in which case only the primary scrambling code value indicated by *start* applies.
start
Indicates the lowest primary scrambling code in the range.

– *PhysCellIdCDMA2000*

The IE *PhysCellIdCDMA2000* identifies the PNOffset that represents the "Physical cell identity" in CDMA2000.

PhysCellIdCDMA2000 information element

```
-- ASN1START

PhysCellIdCDMA2000 ::=          INTEGER (0..maxPNOffset)

-- ASN1STOP
```

– *PhysCellIdGERAN*

The IE *PhysCellIdGERAN* contains the Base Station Identity Code (BSIC).

PhysCellIdGERAN information element

```
-- ASN1START

PhysCellIdGERAN ::=             SEQUENCE {
    networkColourCode                   BIT STRING (SIZE (3)),
    baseStationColourCode               BIT STRING (SIZE (3))
}

-- ASN1STOP
```

***PhysCellIdGERAN* field descriptions**
baseStationColourCode
Base station Colour Code as defined in TS 23.003 [27].
networkColourCode
Network Colour Code as defined in TS 23.003 [27].

– *PhysCellIdUTRA-FDD*

The IE *PhysCellIdUTRA-FDD* is used to indicate the physical layer identity of the cell, i.e. the primary scrambling code, as defined in TS 25.331 [19].

PhysCellIdUTRA-FDD information element

```
-- ASN1START

PhysCellIdUTRA-FDD ::=              INTEGER (0..511)

-- ASN1STOP
```

– *PhysCellIdUTRA-TDD*

The IE *PhysCellIdUTRA-TDD* is used to indicate the physical layer identity of the cell, i.e. the cell parameters ID (TDD), as specified in TS 25.331 [19]. Also corresponds to the Initial Cell Parameter Assignment in TS 25.223 [46].

DAINGEAN_0002194

***PhysCellIdUTRA-TDD* information element**

```
-- ASN1START

PhysCellIdUTRA-TDD ::=              INTEGER (0..127)

-- ASN1STOP
```

– *PLMN-Identity*

The IE *PLMN-Identity* identifies a Public Land Mobile Network. Further information regarding how to set the IE are specified in TS 23.003 [27].

***PLMN-Identity* information element**

```
-- ASN1START

PLMN-Identity ::=                   SEQUENCE {
    mcc                                 MCC                 OPTIONAL,               -- Cond MCC
    mnc                                 MNC
}

MCC ::=                             SEQUENCE (SIZE (3)) OF
                                            MCC-MNC-Digit

MNC ::=                             SEQUENCE (SIZE (2..3)) OF
                                            MCC-MNC-Digit

MCC-MNC-Digit ::=                   INTEGER (0..9)


-- ASN1STOP
```

***PLMN-Identity* field descriptions**
mcc The first element contains the first MCC digit, the second element the second MCC digit and so on. If the field is absent, it takes the same value as the mcc of the immediately preceding IE PLMN-Identity. See TS 23.003 [27].
mnc The first element contains the first MNC digit, the second element the second MNC digit and so on. See TS 23.003 [27].

Conditional presence	Explanation
MCC	This IE is mandatory when *PLMN-Identity* is included in *CellGlobalIdEUTRA*, in *CellGlobalIdUTRA*, in *CellGlobalIdGERAN* or in *RegisteredMME*. This IE is also mandatory in the first occurrence of the IE *PLMN-Identity* within the IE *PLMN-IdentityList*. Otherwise it is optional, need OP.

– *PLMN-IdentityList3*

Includes a list of PLMN identities.

***PLMN-IdentityList3* information element**

```
-- ASN1START

PLMN-IdentityList3-r11 ::=              SEQUENCE (SIZE (1..16)) OF PLMN-Identity

-- ASN1STOP
```

– *PreRegistrationInfoHRPD*

```
-- ASN1START

PreRegistrationInfoHRPD ::=         SEQUENCE {
```


DAINGEAN_0002195

```
    preRegistrationAllowed              BOOLEAN,
    preRegistrationZoneId               PreRegistrationZoneIdHRPD   OPTIONAL, -- cond PreRegAllowed
    secondaryPreRegistrationZoneIdList  SecondaryPreRegistrationZoneIdListHRPD  OPTIONAL -- Need OR
}

SecondaryPreRegistrationZoneIdListHRPD ::=  SEQUENCE (SIZE (1..2)) OF PreRegistrationZoneIdHRPD

PreRegistrationZoneIdHRPD ::=           INTEGER (0..255)

-- ASN1STOP
```

***PreRegistrationInfoHRPD* field descriptions**
preRegistrationAllowed TRUE indicates that a UE shall perform a CDMA2000 HRPD pre-registration if the UE does not have a valid / current pre-registration. FALSE indicates that the UE is not allowed to perform CDMA2000 HRPD pre-registration in the current cell.
preRegistrationZoneID ColorCode (see C.S0024 [26], C.S0087 [44]) of the CDMA2000 Reference Cell corresponding to the HRPD sector under the HRPD AN that is configured for this LTE cell. It is used to control when the UE should register or re-register.
secondaryPreRegistrationZoneIdList List of SecondaryColorCodes (see C.S0024 [26], C.S0087 [44]) of the CDMA2000 Reference Cell corresponding to the HRPD sector under the HRPD AN that is configured for this LTE cell. They are used to control when the UE should re-register.

Conditional presence	Explanation
PreRegAllowed	*The field is mandatory in case the preRegistrationAllowed is set to true. Otherwise the field is not present and the UE shall delete any existing value for this field.*

– *Q-QualMin*

The IE *Q-QualMin* is used to indicate for cell selection/ re-selection the required minimum received RSRQ level in the (E-UTRA) cell. Corresponds to parameter $Q_{qualmin}$ in TS 36.304 [4]. Actual value $Q_{qualmin}$ = field value [dB].

Q-QualMin information element

```
-- ASN1START

Q-QualMin-r9 ::=                    INTEGER (-34..-3)

-- ASN1STOP
```

– *Q-RxLevMin*

The IE *Q-RxLevMin* is used to indicate for cell selection/ re-selection the required minimum received RSRP level in the (E-UTRA) cell. Corresponds to parameter $Q_{rxlevmin}$ in TS 36.304 [4]. Actual value $Q_{rxlevmin}$ = field value * 2 [dBm].

Q-RxLevMin information element

```
-- ASN1START

Q-RxLevMin ::=                      INTEGER (-70..-22)

-- ASN1STOP
```

– *Q-OffsetRange*

The IE *Q-OffsetRange* is used to indicate a cell, CSI-RS resource or frequency specific offset to be applied when evaluating candidates for cell re-selection or when evaluating triggering conditions for measurement reporting. The value in dB. Value dB-24 corresponds to -24 dB, dB-22 corresponds to -22 dB and so on.

DAINGEAN_0002196

Q-OffsetRange information element

```
-- ASN1START

Q-OffsetRange ::=                       ENUMERATED {
                                                dB-24, dB-22, dB-20, dB-18, dB-16, dB-14,
                                                dB-12, dB-10, dB-8, dB-6, dB-5, dB-4, dB-3,
                                                dB-2, dB-1, dB0, dB1, dB2, dB3, dB4, dB5,
                                                dB6, dB8, dB10, dB12, dB14, dB16, dB18,
                                                dB20, dB22, dB24}

-- ASN1STOP
```

– Q-OffsetRangeInterRAT

The IE *Q-OffsetRangeInterRAT* is used to indicate a frequency specific offset to be applied when evaluating triggering conditions for measurement reporting. The value in dB.

Q-OffsetRangeInterRAT information element

```
-- ASN1START

Q-OffsetRangeInterRAT ::=                   INTEGER (-15..15)

-- ASN1STOP
```

– ReselectionThreshold

The IE *ReselectionThreshold* is used to indicate an Rx level threshold for cell reselection. Actual value of threshold = field value * 2 [dB].

ReselectionThreshold information element

```
-- ASN1START

ReselectionThreshold ::=                INTEGER (0..31)

-- ASN1STOP
```

– ReselectionThresholdQ

The IE *ReselectionThresholdQ* is used to indicate a quality level threshold for cell reselection. Actual value of threshold = field value [dB].

ReselectionThresholdQ information element

```
-- ASN1START

ReselectionThresholdQ-r9 ::=            INTEGER (0..31)

-- ASN1STOP
```

– SCellIndex

The IE *SCellIndex* concerns a short identity, used to identify an SCell.

SCellIndex information element

```
-- ASN1START

SCellIndex-r10 ::=                      INTEGER (1..7)
SCellIndex-r13 ::=                      INTEGER (1..31)

-- ASN1STOP
```


DAINGEAN_0002197

– *ServCellIndex*

The IE *ServCellIndex* concerns a short identity, used to identify a serving cell (i.e. the PCell or an SCell). Value 0 applies for the PCell, while the *SCellIndex* that has previously been assigned applies for SCells.

ServCellIndex information element

```
-- ASN1START

ServCellIndex-r10 ::=                INTEGER (0..7)
ServCellIndex-r13 ::=              INTEGER (0..31)

-- ASN1STOP
```

– *SpeedStateScaleFactors*

The IE *SpeedStateScaleFactors* concerns factors, to be applied when the UE is in medium or high speed state, used for scaling a mobility control related parameter.

SpeedStateScaleFactors information element

```
-- ASN1START

SpeedStateScaleFactors ::=          SEQUENCE {
    sf-Medium                           ENUMERATED {oDot25, oDot5, oDot75, lDot0},
    sf-High                             ENUMERATED {oDot25, oDot5, oDot75, lDot0}
}
-- ASN1STOP
```

***SpeedStateScaleFactors* field descriptions**
sf-High   The concerned mobility control related parameter is multiplied with this factor if the UE is in High Mobility state as defined in TS 36.304 [4]. Value oDot25 corresponds to 0.25, oDot5 corresponds to 0.5 , oDot75 corresponds to 0.75 and so on.
sf-Medium   The concerned mobility control related parameter is multiplied with this factor if the UE is in Medium Mobility state as defined in TS 36.304 [4]. Value oDot25 corresponds to 0.25, oDot5 corresponds to 0.5 , oDot75 corresponds to 0.75 and so on.

– *SystemInfoListGERAN*

The IE *SystemInfoListGERAN* contains system information of a GERAN cell.

SystemInfoListGERAN information element

```
-- ASN1START

SystemInfoListGERAN ::=             SEQUENCE (SIZE (1..maxGERAN-SI)) OF
                                        OCTET STRING (SIZE (1..23))

-- ASN1STOP
```

***SystemInfoListGERAN* field descriptions**
SystemInfoListGERAN   Each OCTET STRING contains one System Information (SI) message as defined in TS 44.018 [45, table 9.1.1] excluding the L2 Pseudo Length, the RR management Protocol Discriminator and the Skip Indicator or a complete Packet System Information (PSI) message as defined in TS 44.060 [36, table 11.2.1].

DAINGEAN_0002198

– *SystemTimeInfoCDMA2000*

The IE *SystemTimeInfoCDMA2000* informs the UE about the absolute time in the current cell. The UE uses this absolute time knowledge to derive the CDMA2000 Physical cell identity, expressed as PNOffset, of neighbour CDMA2000 cells.

NOTE: The UE needs the CDMA2000 system time with a certain level of accuracy for performing measurements as well as for communicating with the CDMA2000 network (HRPD or 1xRTT).

SystemTimeInfoCDMA2000 information element

```
-- ASN1START

SystemTimeInfoCDMA2000 ::=          SEQUENCE {
    cdma-EUTRA-Synchronisation          BOOLEAN,
    cdma-SystemTime                     CHOICE {
        synchronousSystemTime               BIT STRING (SIZE (39)),
        asynchronousSystemTime              BIT STRING (SIZE (49))
    }
}

-- ASN1STOP
```

SystemTimeInfoCDMA2000 field descriptions

asynchronousSystemTime
The CDMA2000 system time corresponding to the SFN boundary at or after the ending boundary of the SI-Window in which *SystemInformationBlockType8* is transmitted. E-UTRAN includes this field if the E-UTRA frame boundary is not aligned to the start of CDMA2000 system time. This field size is 49 bits and the unit is 8 CDMA chips based on 1.2288 Mcps.

cdma-EUTRA-Synchronisation
TRUE indicates that there is no drift in the timing between E-UTRA and CDMA2000. FALSE indicates that the timing between E-UTRA and CDMA2000 can drift. NOTE 1

synchronousSystemTime
CDMA2000 system time corresponding to the SFN boundary at or after the ending boundary of the SI-window in which *SystemInformationBlockType8* is transmitted. E-UTRAN includes this field if the E-UTRA frame boundary is aligned to the start of CDMA2000 system time. This field size is 39 bits and the unit is 10 ms based on a 1.2288 Mcps chip rate.

NOTE 1: The following table shows the recommended combinations of the *cdma-EUTRA-Synchronisation* field and the choice of cdma-SystemTime included by E-UTRAN for FDD and TDD:

FDD/TDD	*cdma-EUTRA-Synchronisation*	*synchronousSystemTime*	*asynchronousSystemTime*
FDD	FALSE	Not Recommended	Recommended
FDD	TRUE	Recommended	Recommended
TDD	FALSE	Not Recommended	Recommended
TDD	TRUE	Recommended	Recommended

– *TrackingAreaCode*

The IE *TrackingAreaCode* is used to identify a tracking area within the scope of a PLMN, see TS 24.301 [35].

TrackingAreaCode information element

```
-- ASN1START

TrackingAreaCode ::=                BIT STRING (SIZE (16))

-- ASN1STOP
```


DAINGEAN_0002199

– *T-Reselection*

The IE *T-Reselection* concerns the cell reselection timer $Treselection_{RAT}$ for E-UTRA, UTRA, GERAN or CDMA2000. Value in seconds.

***T-Reselection* information element**

```
-- ASN1START

T-Reselection ::=                   INTEGER (0..7)

-- ASN1STOP
```

– *T-ReselectionEUTRA-CE*

The IE *T-ReselectionEUTRA-CE* concerns the cell reselection timer $Treselection_{EUTRA\_CE}$ as specified in TS 36.304 [4]. Value in seconds.

***T-ReselectionEUTRA-CE* information element**

```
-- ASN1START

T-ReselectionEUTRA-CE-r13 ::=               INTEGER (0..15)

-- ASN1STOP
```

6.3.5 Measurement information elements

– *AllowedMeasBandwidth*

The IE *AllowedMeasBandwidth* is used to indicate the maximum allowed measurement bandwidth on a carrier frequency as defined by the parameter Transmission Bandwidth Configuration "N_{RB}" TS 36.104 [47]. The values mbw6, mbw15, mbw25, mbw50, mbw75, mbw100 indicate 6, 15, 25, 50, 75 and 100 resource blocks respectively.

***AllowedMeasBandwidth* information element**

```
-- ASN1START

AllowedMeasBandwidth ::=                ENUMERATED {mbw6, mbw15, mbw25, mbw50, mbw75, mbw100}

-- ASN1STOP
```

– *CSI-RSRP-Range*

The IE *CSI-RSRP-Range* specifies the value range used in CSI-RSRP measurements and thresholds. Integer value for CSI-RSRP measurements according to mapping table in TS 36.133 [16].

***CSI-RSRP-Range* information element**

```
-- ASN1START

CSI-RSRP-Range-r12 ::=                      INTEGER(0..97)

-- ASN1STOP
```

– *Hysteresis*

The IE *Hysteresis* is a parameter used within the entry and leave condition of an event triggered reporting condition. The actual value is field value * 0.5 dB.

DAINGEAN_0002200

Hysteresis information element

```
-- ASN1START

Hysteresis ::=                          INTEGER (0..30)

-- ASN1STOP
```

– LocationInfo

The IE *LocationInfo* is used to transfer detailed location information available at the UE to correlate measurements and UE position information.

LocationInfo information element

```
-- ASN1START

LocationInfo-r10 ::=    SEQUENCE {
    locationCoordinates-r10                 CHOICE {
        ellipsoid-Point-r10                     OCTET STRING,
        ellipsoidPointWithAltitude-r10          OCTET STRING,
    ...,
        ellipsoidPointWithUncertaintyCircle-r11                 OCTET STRING,
        ellipsoidPointWithUncertaintyEllipse-r11                OCTET STRING,
        ellipsoidPointWithAltitudeAndUncertaintyEllipsoid-r11   OCTET STRING,
        ellipsoidArc-r11                                        OCTET STRING,
        polygon-r11                                             OCTET STRING
    },
    horizontalVelocity-r10                  OCTET STRING                OPTIONAL,
    gnss-TOD-msec-r10                       OCTET STRING                OPTIONAL,
    ...
}

-- ASN1STOP
```

LocationInfo field descriptions
ellipsoidArc
Parameter *EllipsoidArc* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
ellipsoid-Point
Parameter *Ellipsoid-Point* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
ellipsoidPointWithAltitude
Parameter *EllipsoidPointWithAltitude* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
ellipsoidPointWithAltitudeAndUncertaintyEllipsoid
Parameter *EllipsoidPointWithAltitudeAndUncertaintyEllipsoid* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
ellipsoidPointWithUncertaintyCircle
Parameter *Ellipsoid-PointWithUncertaintyCircle* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
ellipsoidPointWithUncertaintyEllipse
Parameter *EllipsoidPointWithUncertaintyEllipse* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
gnss-TOD-msec
Parameter *Gnss-TOD-msec* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
horizontalVelocity
Parameter *HorizontalVelocity* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.
polygon
Parameter *Polygon* defined in TS36.355 [54]. The first/leftmost bit of the first octet contains the most significant bit.

– MBSFN-RSRQ-Range

The IE *MBSFN-RSRQ-Range* specifies the value range used in MBSFN RSRQ measurements. Integer value for MBSFN RSRQ measurements according to mapping table in TS 36.133 [16].

DAINGEAN_0002201

MBSFN-RSRQ-Range information element

```
-- ASN1START

MBSFN-RSRQ-Range-r12 ::=                INTEGER(0..31)
-- ASN1STOP
```

– MeasConfig

The IE *MeasConfig* specifies measurements to be performed by the UE, and covers intra-frequency, inter-frequency and inter-RAT mobility as well as configuration of measurement gaps.

MeasConfig information element

```
-- ASN1START

MeasConfig ::=                      SEQUENCE {
    -- Measurement objects
    measObjectToRemoveList              MeasObjectToRemoveList              OPTIONAL,   -- Need ON
    measObjectToAddModList              MeasObjectToAddModList              OPTIONAL,   -- Need ON
    -- Reporting configurations
    reportConfigToRemoveList            ReportConfigToRemoveList            OPTIONAL,   -- Need ON
    reportConfigToAddModList            ReportConfigToAddModList            OPTIONAL,   -- Need ON
    -- Measurement identities
    measIdToRemoveList                  MeasIdToRemoveList                  OPTIONAL,   -- Need ON
    measIdToAddModList                  MeasIdToAddModList                  OPTIONAL,   -- Need ON
    -- Other parameters
    quantityConfig                      QuantityConfig                      OPTIONAL,   -- Need ON
    measGapConfig                       MeasGapConfig                       OPTIONAL,   -- Need ON
    s-Measure                           RSRP-Range                          OPTIONAL,   -- Need ON
    preRegistrationInfoHRPD             PreRegistrationInfoHRPD             OPTIONAL,   -- Need OP
    speedStatePars          CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            mobilityStateParameters             MobilityStateParameters,
            timeToTrigger-SF                    SpeedStateScaleFactors
        }
    }                                                                       OPTIONAL,   -- Need ON
    ...,
    [[  measObjectToAddModList-v9e0         MeasObjectToAddModList-v9e0     OPTIONAL    -- Need ON
    ]],
    [[  allowInterruptions-r11              BOOLEAN                         OPTIONAL    -- Need ON
    ]],
    [[  measScaleFactor-r12         CHOICE {
            release                         NULL,
            setup                           MeasScaleFactor-r12
        }                                                           OPTIONAL,   -- Need ON
        measIdToRemoveListExt-r12           MeasIdToRemoveListExt-r12       OPTIONAL,   -- Need ON
        measIdToAddModListExt-r12           MeasIdToAddModListExt-r12       OPTIONAL,   -- Need ON
        measRSRQ-OnAllSymbols-r12       BOOLEAN                         OPTIONAL    -- Need ON
    ]],
    [[
        measObjectToRemoveListExt-r13       MeasObjectToRemoveListExt-r13   OPTIONAL,   -- Need ON
        measObjectToAddModListExt-r13       MeasObjectToAddModListExt-r13   OPTIONAL,   -- Need ON
        measIdToAddModList-v1310            MeasIdToAddModList-v1310        OPTIONAL,   -- Need ON
        measIdToAddModListExt-v1310         MeasIdToAddModListExt-v1310     OPTIONAL        -- Need
ON
    ]]
}

MeasIdToRemoveList ::=              SEQUENCE (SIZE (1..maxMeasId)) OF MeasId

MeasIdToRemoveListExt-r12 ::=       SEQUENCE (SIZE (1..maxMeasId)) OF MeasId-v1250

MeasObjectToRemoveList ::=          SEQUENCE (SIZE (1..maxObjectId)) OF MeasObjectId

MeasObjectToRemoveListExt-r13 ::=   SEQUENCE (SIZE (1..maxObjectId)) OF MeasObjectId-v1310

ReportConfigToRemoveList ::=        SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigId

-- ASN1STOP
```


DAINGEAN_0002202

***MeasConfig* field descriptions**
allowInterruptions
Value TRUE indicates that the UE is allowed to cause interruptions to serving cells when performing measurements of deactivated SCell carriers for *measCycleSCell* of less than 640ms, as specified in TS 36.133 [16]. E-UTRAN enables this field only when an SCell is configured.
measGapConfig
Used to setup and release measurement gaps.
measIdToAddModList
List of measurement identities. Field *measIdToAddModListExt* includes additional measurement identities i.e. extends the size of the measurement identity list using the general principles specified in 5.1.2. If E-UTRAN includes *measIdToAddModList-v1310* it includes the same number of entries, and listed in the same order, as in *measIdToAddModList* (i.e. without suffix). If E-UTRAN includes *measIdToAddModListExt-v1310,* it includes the same number of entries, and listed in the same order, as in *measIdToAddModListExt-r12.*
measIdToRemoveList
List of measurement identities to remove. Field *measIdToRemoveListExt* includes additional measurement identities i.e. extends the size of the measurement identity list using the general principles specified in 5.1.2.
measObjectToAddModList
If E-UTRAN includes *measObjectToAddModList-v9e0* it includes the same number of entries, and listed in the same order, as in *measObjectToAddModList* (i.e. without suffix). Field *measObjectToAddModListExt* includes additional measurement object identities i.e. extends the size of the measurement object identity list using the general principles specified in 5.1.2.
measObjectToRemoveList
List of measurement objects to remove. Field *measObjectToRemoveListExt* includes additional measurement object identities i.e. extends the size of the measurement object identity list using the general principles specified in 5.1.2.
measRSRQ-OnAllSymbols
Value *TRUE* indicates that the UE shall, when performing RSRQ measurements, perform RSRQ measurement on all OFDM symbols in accordance with TS 36.214 [48]. If *widebandRSRQ-Meas* is enabled for the frequency in *MeasObjectEUTRA,* the UE shall, when performing RSRQ measurements, perform RSRQ measurement on all OFDM symbols with wider bandwidth for concerned frequency in accordance with TS 36.214 [48].
measScaleFactor
Even if *reducedMeasPerformance* is not included in any *measObjectEUTRA* or *measObjectUTRA*, E-UTRAN may configure this field. The UE behavior is specified in TS 36.133 [16].
preRegistrationInfoHRPD
The CDMA2000 HRPD Pre-Registration Information tells the UE if it should pre-register with the CDMA2000 HRPD network and identifies the Pre-registration zone to the UE.
reportConfigToRemoveList
List of measurement reporting configurations to remove.
s-Measure
PCell quality threshold controlling whether or not the UE is required to perform measurements of intra-frequency, inter-frequency and inter-RAT neighbouring cells. Value "0" indicates to disable *s-Measure*.
timeToTrigger-SF
The *timeToTrigger* in *ReportConfigEUTRA* and in *ReportConfigInterRAT* are multiplied with the scaling factor applicable for the UE's speed state.

– *MeasDS-Config*

The IE *MeasDS-Config* specifies information applicable for discovery signals measurement.

***MeasDS-Config* information elements**

```
-- ASN1START

MeasDS-Config-r12 ::=           CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        dmtc-PeriodOffset-r12           CHOICE {
            ms40-r12                        INTEGER(0..39),
            ms80-r12                        INTEGER(0..79),
            ms160-r12                       INTEGER(0..159),
            ...
        },
        ds-OccasionDuration-r12     CHOICE {
            durationFDD-r12                 INTEGER(1..maxDS-Duration-r12),
            durationTDD-r12                 INTEGER(2..maxDS-Duration-r12)
        },
        measCSI-RS-ToRemoveList-r12 MeasCSI-RS-ToRemoveList-r12 OPTIONAL,   -- Need ON
        measCSI-RS-ToAddModList-r12 MeasCSI-RS-ToAddModList-r12 OPTIONAL,   -- Need ON
        ...
```


DAINGEAN_0002203

```
    }
}

MeasCSI-RS-ToRemoveList-r12 ::= SEQUENCE (SIZE (1..maxCSI-RS-Meas-r12)) OF MeasCSI-RS-Id-r12

MeasCSI-RS-ToAddModList-r12 ::= SEQUENCE (SIZE (1..maxCSI-RS-Meas-r12)) OF MeasCSI-RS-Config-r12

MeasCSI-RS-Id-r12 ::=           INTEGER (1..maxCSI-RS-Meas-r12)

MeasCSI-RS-Config-r12 ::=       SEQUENCE {
    measCSI-RS-Id-r12               MeasCSI-RS-Id-r12,
    physCellId-r12                  INTEGER (0..503),
    scramblingIdentity-r12          INTEGER (0..503),
    resourceConfig-r12              INTEGER (0..31),
    subframeOffset-r12              INTEGER (0..4),
    csi-RS-IndividualOffset-r12     Q-OffsetRange,
    ...
}

-- ASN1STOP
```

***MeasDS-Config* field descriptions**
csi-RS-IndividualOffset CSI-RS individual offset applicable to a specific CSI-RS resource. Value dB-24 corresponds to -24 dB, dB-22 corresponds to -22 dB and so on.
dmtc-PeriodOffset Indicates the discovery signals measurement timing configuration (DMTC) periodicity (*dmtc-Periodicity*) and offset (*dmtc-Offset*) for this frequency. For DMTC periodicity, value ms40 corresponds to 40ms, ms80 corresponds to 80ms and so on. The value of DMTC offset is in number of subframe(s). The duration of a DMTC occasion is 6ms.
ds-OccasionDuration Indicates the duration of discovery signal occasion for this frequency. Discovery signal occasion duration is common for all cells transmitting discovery signals on one frequency. The UE shall ignore the field *ds-OccasionDuration* for a carrier frequency with a configured LAA SCell and apply a value 1 instead.
measCSI-RS-ToAddModList List of CSI-RS resources to add/ modify in the CSI-RS resource list for discovery signals measurement.
measCSI-RS-ToRemoveList List of CSI-RS resources to remove from the CSI-RS resource list for discovery signals measurement.
physCellId Indicates the physical cell identity where UE may assume that the CSI-RS and the PSS/SSS/CRS corresponding to the indicated physical cell identity are quasi co-located with respect to average delay and doppler shift.
resourceConfig Parameter: CSI reference signal configuration, see TS 36.211 [21, table 6.10.5.2-1 and 6.10.5.2-2]. For a carrier frequency with a configured LAA SCell, E-UTRAN does not configure the values {0, 4, 5, 9, 10, 11, 18, 19}.
scramblingIdentity Parameter: Pseudo-random sequence generator parameter, n_{ID}, see TS 36.213 [23, 7.2.5].
subframeOffset Indicates the subframe offset between SSS of the cell indicated by physCellId and the CSI-RS resource in a discovery signal occasion. The field *subframeOffset* is set to values 0 for a carrier frequency with a configured LAA SCell.

– *MeasGapConfig*

The IE *MeasGapConfig* specifies the measurement gap configuration and controls setup/ release of measurement gaps.

***MeasGapConfig* information element**

```
-- ASN1START

MeasGapConfig ::=               CHOICE {
    release                         NULL,
    setup                           SEQUENCE {
        gapOffset                       CHOICE {
                gp0                             INTEGER (0..39),
                gp1                             INTEGER (0..79),
                ...
        }
    }
```


DAINGEAN_0002204

```
}

-- ASN1STOP
```

***MeasGapConfig* field descriptions**
gapOffset
Value *gapOffset* of *gp0* corresponds to gap offset of Gap Pattern Id "0" with MGRP = 40ms, *gapOffset* of *gp1* corresponds to gap offset of Gap Pattern Id "1" with MGRP = 80ms. Also used to specify the measurement gap pattern to be applied, as defined in TS 36.133 [16].

– *MeasId*

The IE *MeasId* is used to identify a measurement configuration, i.e., linking of a measurement object and a reporting configuration.

MeasId information element

```
-- ASN1START

MeasId ::=                          INTEGER (1..maxMeasId)

MeasId-v1250 ::=                    INTEGER (maxMeasId-Plus1..maxMeasId-r12)

-- ASN1STOP
```

– *MeasIdToAddModList*

The IE *MeasIdToAddModList* concerns a list of measurement identities to add or modify, with for each entry the *measId*, the associated *measObjectId* and the associated *reportConfigId*. Field *measIdToAddModListExt* includes additional measurement identities i.e. extends the size of the measurement identity list using the general principles specified in 5.1.2.

MeasIdToAddModList information element

```
-- ASN1START

MeasIdToAddModList ::=              SEQUENCE (SIZE (1..maxMeasId)) OF MeasIdToAddMod

MeasIdToAddModList-v1310 ::=        SEQUENCE (SIZE (1..maxMeasId)) OF MeasIdToAddMod-v1310

MeasIdToAddModListExt-r12 ::=       SEQUENCE (SIZE (1..maxMeasId)) OF MeasIdToAddModExt-r12

MeasIdToAddModListExt-v1310 ::=     SEQUENCE (SIZE (1..maxMeasId)) OF MeasIdToAddMod-v1310

MeasIdToAddMod ::=  SEQUENCE {
    measId                              MeasId,
    measObjectId                        MeasObjectId,
    reportConfigId                      ReportConfigId
}

MeasIdToAddModExt-r12 ::=   SEQUENCE {
    measId-v1250                        MeasId-v1250,
    measObjectId-r12                    MeasObjectId,
    reportConfigId-r12                  ReportConfigId
}

MeasIdToAddMod-v1310 ::=    SEQUENCE {
    measObjectId-v1310          MeasObjectId-v1310      OPTIONAL
}

-- ASN1STOP
```

***MeasIdToAddModList* field descriptions**
measObjectId
If the *measObjectId-v1310* is included, the *measObjectId* or *measObjectId-r12* is ignored by the UE.

DAINGEAN_0002205

– *MeasObjectCDMA2000*

The IE *MeasObjectCDMA2000* specifies information applicable for inter-RAT CDMA2000 neighbouring cells.

MeasObjectCDMA2000 information element

```
-- ASN1START

MeasObjectCDMA2000 ::=              SEQUENCE {
    cdma2000-Type                       CDMA2000-Type,
    carrierFreq                         CarrierFreqCDMA2000,
    searchWindowSize                    INTEGER (0..15)                     OPTIONAL,   -- Need ON
    offsetFreq                          Q-OffsetRangeInterRAT               DEFAULT 0,
    cellsToRemoveList                   CellIndexList                       OPTIONAL,   -- Need ON
    cellsToAddModList                   CellsToAddModListCDMA2000           OPTIONAL,   -- Need ON
    cellForWhichToReportCGI             PhysCellIdCDMA2000                  OPTIONAL,   -- Need ON
    ...
}

CellsToAddModListCDMA2000 ::=       SEQUENCE (SIZE (1..maxCellMeas)) OF CellsToAddModCDMA2000

CellsToAddModCDMA2000 ::=   SEQUENCE {
    cellIndex                           INTEGER (1..maxCellMeas),
    physCellId                          PhysCellIdCDMA2000
}

-- ASN1STOP
```

MeasObjectCDMA2000 field descriptions
carrierInfo   Identifies CDMA2000 carrier frequency for which this configuration is valid.
cdma2000-Type   The type of CDMA2000 network: CDMA2000 1xRTT or CDMA2000 HRPD.
cellIndex   Entry index in the neighbouring cell list.
cellsToAddModList   List of cells to add/ modify in the neighbouring cell list.
cellsToRemoveList   List of cells to remove from the neighbouring cell list.
physCellId   CDMA2000 Physical cell identity of a cell in neighbouring cell list expressed as PNOffset.
searchWindowSize   Provides the search window size to be used by the UE for the neighbouring pilot, see C.S0005 [25].

– *MeasObjectEUTRA*

The IE *MeasObjectEUTRA* specifies information applicable for intra-frequency or inter-frequency E-UTRA cells.

MeasObjectEUTRA information element

```
-- ASN1START

MeasObjectEUTRA ::=                 SEQUENCE {
    carrierFreq                         ARFCN-ValueEUTRA,
    allowedMeasBandwidth                AllowedMeasBandwidth,
    presenceAntennaPort1                PresenceAntennaPort1,
    neighCellConfig                     NeighCellConfig,
    offsetFreq                          Q-OffsetRange               DEFAULT dB0,
    -- Cell list
    cellsToRemoveList                   CellIndexList               OPTIONAL,       -- Need ON
    cellsToAddModList                   CellsToAddModList           OPTIONAL,       -- Need ON
    -- Black list
    blackCellsToRemoveList              CellIndexList               OPTIONAL,       -- Need ON
    blackCellsToAddModList              BlackCellsToAddModList      OPTIONAL,       -- Need ON
    cellForWhichToReportCGI             PhysCellId                  OPTIONAL,       -- Need ON
    ...,
    [[measCycleSCell-r10                MeasCycleSCell-r10      OPTIONAL,       -- Need ON
        measSubframePatternConfigNeigh-r10  MeasSubframePatternConfigNeigh-r10  OPTIONAL
                -- Need ON
    ]],
```


DAINGEAN_0002206

```
    [[widebandRSRQ-Meas-r11             BOOLEAN OPTIONAL        -- Cond WB-RSRQ
    ]],
    [[  altTTT-CellsToRemoveList-r12    CellIndexList               OPTIONAL,       -- Need ON
        altTTT-CellsToAddModList-r12    AltTTT-CellsToAddModList-r12    OPTIONAL,       -- Need ON
        t312-r12                        CHOICE {
            release                         NULL,
            setup                           ENUMERATED {ms0, ms50, ms100, ms200,
                                             ms300, ms400, ms500, ms1000}
        }                                                   OPTIONAL,       -- Need ON
        reducedMeasPerformance-r12      BOOLEAN                 OPTIONAL,       -- Need ON
        measDS-Config-r12               MeasDS-Config-r12       OPTIONAL        -- Need ON
    ]],
    [[
        whiteCellsToRemoveList-r13      CellIndexList               OPTIONAL,       -- Need ON
        whiteCellsToAddModList-r13      WhiteCellsToAddModList-r13  OPTIONAL,       -- Need ON
        rmtc-Config-r13             RMTC-Config-r13         OPTIONAL,       -- Need ON
        carrierFreq-r13                 ARFCN-ValueEUTRA-v9e0       OPTIONAL            -- Need ON
    ]]
}

MeasObjectEUTRA-v9e0 ::=            SEQUENCE {
    carrierFreq-v9e0                    ARFCN-ValueEUTRA-v9e0
}

CellsToAddModList ::=               SEQUENCE (SIZE (1..maxCellMeas)) OF CellsToAddMod

CellsToAddMod ::=   SEQUENCE {
    cellIndex                           INTEGER (1..maxCellMeas),
    physCellId                          PhysCellId,
    cellIndividualOffset                Q-OffsetRange
}

BlackCellsToAddModList ::=          SEQUENCE (SIZE (1..maxCellMeas)) OF BlackCellsToAddMod

BlackCellsToAddMod ::=  SEQUENCE {
    cellIndex                           INTEGER (1..maxCellMeas),
    physCellIdRange                     PhysCellIdRange
}

MeasCycleSCell-r10 ::=              ENUMERATED {sf160, sf256, sf320, sf512,
                                                sf640, sf1024, sf1280, spare1}

MeasSubframePatternConfigNeigh-r10 ::=  CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        measSubframePatternNeigh-r10        MeasSubframePattern-r10,
        measSubframeCellList-r10            MeasSubframeCellList-r10    OPTIONAL    -- Cond
always
    }
}

MeasSubframeCellList-r10 ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF PhysCellIdRange

AltTTT-CellsToAddModList-r12 ::=    SEQUENCE (SIZE (1..maxCellMeas)) OF AltTTT-CellsToAddMod-r12

AltTTT-CellsToAddMod-r12 ::=    SEQUENCE {
    cellIndex-r12                       INTEGER (1..maxCellMeas),
    physCellIdRange-r12                 PhysCellIdRange
}

WhiteCellsToAddModList-r13 ::=          SEQUENCE (SIZE (1..maxCellMeas)) OF WhiteCellsToAddMod-r13

WhiteCellsToAddMod-r13 ::=  SEQUENCE {
    cellIndex-r13                       INTEGER (1..maxCellMeas),
    physCellIdRange-r13                 PhysCellIdRange
}

RMTC-Config-r13 ::= CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        rmtc-Period-r13                 ENUMERATED {ms40, ms80, ms160, ms320, ms640},
        rmtc-SubframeOffset-r13         INTEGER(0..639)             OPTIONAL,       -- Need ON
        measDuration-r13                ENUMERATED {sym1, sym14, sym28, sym42, sym70},
        ...
    }
}

-- ASN1STOP
```


DAINGEAN_0002207

DAINGEAN_0002208

MeasObjectEUTRA field descriptions
altTTT-CellsToAddModList List of cells to add/ modify in the cell list for which the alternative time to trigger specified by *alternativeTimeToTrigger* in *reportConfigEUTRA*, if configured, applies.
altTTT-CellsToRemoveList List of cells to remove from the list of cells for alternative time to trigger.
blackCellsToAddModList List of cells to add/ modify in the black list of cells.
blackCellsToRemoveList List of cells to remove from the black list of cells.
carrierFreq Identifies E-UTRA carrier frequency for which this configuration is valid. E-UTRAN does not configure more than one measurement object for the same physical frequency regardless of the E-ARFCN used to indicate this. CarrierFreq-r13 is included only when the extension list measObjectToAddModListExt-r13 is used. If *carrierFreq-r13* is present, *carrierFreq* (i.e., without suffix) shall be set to value *maxEARFCN*.
cellIndex Entry index in the cell list. An entry may concern a range of cells, in which case this value applies to the entire range.
cellIndividualOffset Cell individual offset applicable to a specific cell. Value dB-24 corresponds to -24 dB, dB-22 corresponds to -22 dB and so on.
cellsToAddModList List of cells to add/ modify in the cell list.
cellsToRemoveList List of cells to remove from the cell list.
measCycleSCell The parameter is used only when an SCell is configured on the frequency indicated by the *measObject* and is in deactivated state, see TS 36.133 [16, 8.3.3]. E-UTRAN configures the parameter whenever an SCell is configured on the frequency indicated by the *measObject*, but the field may also be signalled when an SCell is not configured. Value *sf160* corresponds to 160 sub-frames, *sf256* corresponds to 256 sub-frames and so on.
measDS-Config Parameters applicable to discovery signals measurement on the carrier frequency indicated by *carrierFreq*.
measDuration Number of consecutive symbols for which the Physical Layer reports samples of RSSI, see TS 36.214 [48]. Value *sym1* corresponds to one symbol, *sym14* corresponds to 14 symbols, and so on.
measSubframeCellList List of cells for which *measSubframePatternNeigh* is applied.
measSubframePatternNeigh Time domain measurement resource restriction pattern applicable to neighbour cell RSRP and RSRQ measurements on the carrier frequency indicated by *carrierFreq*. For cells in *measSubframeCellList* the UE shall assume that the subframes indicated by *measSubframePatternNeigh* are non-MBSFN subframes, and have the same special subframe configuration as PCell.
offsetFreq Offset value applicable to the carrier frequency. Value dB-24 corresponds to -24 dB, dB-22 corresponds to -22 dB and so on.
physCellId Physical cell identity of a cell in the cell list.
physCellIdRange Physical cell identity or a range of physical cell identities.
reducedMeasPerformance If set to *TRUE*, the EUTRA carrier frequency is configured for reduced measurement performance, otherwise it is configured for normal measurement performance, see TS 36.133 [16].
rmtc-Config Parameters applicable to RSSI and channel occupancy measurement on the carrier frequency indicated by *carrierFreq*.
rmtc-Period Indicates the RSSI measurement timing configuration (RMTC) periodicity for this frequency. Value *ms40* corresponds to 40 ms periodicity, *ms80* corresponds to 80 ms periodicity and so on, see TS 36.214 [48].
rmtc-SubframeOffset Indicates the RSSI measurement timing configuration (RMTC) subframe offset for this frequency. The value of *rmtc-SubframeOffset* should be smaller than the value of *rmtc-Period*, see TS 36.214 [48]. For inter-frequency measurements, this field is optional present and if it is not configured, the UE chooses a random value as *rmtc-SubframeOffset* for *measDuration* which shall be selected to be between 0 and the configured *rmtc-Period* with equal probability.
t312 The value of timer T312. Value *ms0* represents 0 ms, *ms50* represents 50 ms and so on.

DAINGEAN_0002209

***MeasObjectEUTRA* field descriptions**
widebandRSRQ-Meas
If this field is set to *TRUE*, the UE shall, when performing RSRQ measurements, use a wider bandwidth in accordance with TS 36.133 [16].
whiteCellsToAddModList
List of cells to add/modify in the white list of cells.
whiteCellsToRemoveList
List of cells to remove from the white list of cells.

Conditional presence	Explanation
always	The field is mandatory present.
WB-RSRQ	The field is optionally present, need ON, if the measurement bandwidth indicated by *allowedMeasBandwidth* is 50 resource blocks or larger; otherwise it is not present and the UE shall delete any existing value for this field, if configured.

– *MeasObjectGERAN*

The IE *MeasObjectGERAN* specifies information applicable for inter-RAT GERAN neighbouring frequencies.

***MeasObjectGERAN* information element**

```
-- ASN1START

MeasObjectGERAN ::=                 SEQUENCE {
    carrierFreqs                        CarrierFreqsGERAN,
    offsetFreq                          Q-OffsetRangeInterRAT       DEFAULT 0,
    ncc-Permitted                       BIT STRING(SIZE (8))        DEFAULT '11111111'B,
    cellForWhichToReportCGI             PhysCellIdGERAN             OPTIONAL,   -- Need ON
    ...
}

-- ASN1STOP
```

***MeasObjectGERAN* field descriptions**
ncc-Permitted
Field encoded as a bit map, where bit N is set to "0" if a BCCH carrier with NCC = N-1 is not permitted for monitoring and set to "1" if a BCCH carrier with NCC = N-1 is permitted for monitoring; N = 1 to 8; bit 1 of the bitmap is the leading bit of the bit string.
carrierFreqs
If E-UTRAN includes *cellForWhichToReportCGI*, it includes only one GERAN ARFCN value in *carrierFreqs*.

– *MeasObjectId*

The IE *MeasObjectId* used to identify a measurement object configuration.

***MeasObjectId* information element**

```
-- ASN1START

MeasObjectId ::=                    INTEGER (1..maxObjectId)

MeasObjectId-v1310 ::=          INTEGER (maxObjectId-Plus1-r13..maxObjectId-r13)

MeasObjectId-r13 ::=                INTEGER (1..maxObjectId-r13)

-- ASN1STOP
```

– *MeasObjectToAddModList*

The IE *MeasObjectToAddModList* concerns a list of measurement objects to add or modify

DAINGEAN_0002210

***MeasObjectToAddModList* information element**

```
-- ASN1START

MeasObjectToAddModList ::=          SEQUENCE (SIZE (1..maxObjectId)) OF MeasObjectToAddMod

MeasObjectToAddModListExt-r13 ::=   SEQUENCE (SIZE (1..maxObjectId)) OF MeasObjectToAddModExt-r13

MeasObjectToAddModList-v9e0 ::=     SEQUENCE (SIZE (1..maxObjectId)) OF MeasObjectToAddMod-v9e0

MeasObjectToAddMod ::=  SEQUENCE {
    measObjectId                        MeasObjectId,
    measObject                          CHOICE {
        measObjectEUTRA                     MeasObjectEUTRA,
        measObjectUTRA                      MeasObjectUTRA,
        measObjectGERAN                     MeasObjectGERAN,
        measObjectCDMA2000                  MeasObjectCDMA2000,
        ...,
        measObjectWLAN-r13                  MeasObjectWLAN-r13
    }
}

MeasObjectToAddModExt-r13 ::=   SEQUENCE {
    measObjectId-r13                    MeasObjectId-v1310,
    measObject-r13                      CHOICE {
        measObjectEUTRA-r13                 MeasObjectEUTRA,
        measObjectUTRA-r13                  MeasObjectUTRA,
        measObjectGERAN-r13                 MeasObjectGERAN,
        measObjectCDMA2000-r13              MeasObjectCDMA2000,
        ...,
        measObjectWLAN-v1320                MeasObjectWLAN-r13
    }
}

MeasObjectToAddMod-v9e0 ::= SEQUENCE {
    measObjectEUTRA-v9e0                MeasObjectEUTRA-v9e0        OPTIONAL    -- Cond eutra
}

-- ASN1STOP
```

Conditional presence	Explanation
eutra	The field is optional present, need OR, if for the corresponding entry in *MeasObjectToAddModList* or *MeasObjectToAddModListExt-r13* field *measObject* is set to *measObjectEUTRA* and its sub-field *carrierFreq* is set to *maxEARFCN*. Otherwise the field is not present and the UE shall delete any existing value for this field.

– *MeasObjectUTRA*

The IE *MeasObjectUTRA* specifies information applicable for inter-RAT UTRA neighbouring cells.

***MeasObjectUTRA* information element**

```
-- ASN1START

MeasObjectUTRA ::=                  SEQUENCE {
    carrierFreq                         ARFCN-ValueUTRA,
    offsetFreq                          Q-OffsetRangeInterRAT       DEFAULT 0,
    cellsToRemoveList                   CellIndexList               OPTIONAL,           -- Need ON
    cellsToAddModList                   CHOICE {
        cellsToAddModListUTRA-FDD           CellsToAddModListUTRA-FDD,
        cellsToAddModListUTRA-TDD           CellsToAddModListUTRA-TDD
    }                                                               OPTIONAL,           -- Need ON
    cellForWhichToReportCGI             CHOICE {
        utra-FDD                            PhysCellIdUTRA-FDD,
        utra-TDD                            PhysCellIdUTRA-TDD
    }                                                               OPTIONAL,   -- Need ON
    ...,
    [[  csg-allowedReportingCells-v930          CSG-AllowedReportingCells-r9    OPTIONAL        --
Need ON
    ]],
    [[  reducedMeasPerformance-r12              BOOLEAN             OPTIONAL        -- Need ON
    ]]
}
```


DAINGEAN_0002211

```
CellsToAddModListUTRA-FDD ::=       SEQUENCE (SIZE (1..maxCellMeas)) OF CellsToAddModUTRA-FDD

CellsToAddModUTRA-FDD ::=   SEQUENCE {
    cellIndex                       INTEGER (1..maxCellMeas),
    physCellId                      PhysCellIdUTRA-FDD
}

CellsToAddModListUTRA-TDD ::=       SEQUENCE (SIZE (1..maxCellMeas)) OF CellsToAddModUTRA-TDD

CellsToAddModUTRA-TDD ::=   SEQUENCE {
    cellIndex                       INTEGER (1..maxCellMeas),
    physCellId                      PhysCellIdUTRA-TDD
}

CSG-AllowedReportingCells-r9 ::=        SEQUENCE {
    physCellIdRangeUTRA-FDDList-r9          PhysCellIdRangeUTRA-FDDList-r9  OPTIONAL    -- Need OR
}
-- ASN1STOP
```

***MeasObjectUTRA* field descriptions**
carrierFreq Identifies UTRA carrier frequency for which this configuration is valid. E-UTRAN does not configure more than one measurement object for the same physical frequency regardless of the ARFCN used to indicate this.
cellIndex Entry index in the neighbouring cell list.
cellsToAddModListUTRA-FDD List of UTRA FDD cells to add/ modify in the neighbouring cell list.
cellsToAddModListUTRA-TDD List of UTRA TDD cells to add/modify in the neighbouring cell list.
cellsToRemoveList List of cells to remove from the neighbouring cell list.
csg-allowedReportingCells One or more ranges of physical cell identities for which UTRA-FDD reporting is allowed.
reducedMeasPerformance If set to *TRUE* the UTRA carrier frequency is configured for reduced measurement performance, otherwise it is configured for normal measurement performance, see TS 36.133 [16].

– *MeasObjectWLAN*

The IE *MeasObjectWLAN* specifies information applicable for inter-RAT WLAN measurements.

```
-- ASN1START

MeasObjectWLAN-r13 ::=  SEQUENCE {
    carrierFreq-r13                 CHOICE {
        bandIndicatorListWLAN-r13       SEQUENCE (SIZE (1..maxWLAN-Bands-r13)) OF WLAN-
BandIndicator-r13,
        carrierInfoListWLAN-r13         SEQUENCE (SIZE (1..maxWLAN-CarrierInfo-r13)) OF WLAN-
CarrierInfo-r13
    }       OPTIONAL,   -- Need ON
    wlan-ToAddModList-r13               WLAN-Id-List-r13            OPTIONAL,   -- Need ON
    wlan-ToRemoveList-r13               WLAN-Id-List-r13            OPTIONAL,   -- Need ON
    ...
}

WLAN-BandIndicator-r13 ::=  ENUMERATED {band2dot4, band5, spare6, spare5, spare4, spare3, spare2,
spare1, ...}

-- ASN1STOP
```


DAINGEAN_0002212

MeasObjectWLAN field descriptions
bandIndicatorListWLAN Includes the list of WLAN bands where the value band2dot4 indicates the 2.4Ghz band; the value band5 indicates the 5Ghz band.
carrierInfoListWLAN Includes the list of WLAN carrier information for the measurement object.
wlan-ToAddModList Includes the list of WLAN identifiers to be added to the measurement configuration.
wlan-ToRemoveList Includes the list of WLAN identifiers to be removed from the measurement configuration.

– *MeasResults*

The IE *MeasResults* covers measured results for intra-frequency, inter-frequency and inter- RAT mobility.

MeasResults information element

```
-- ASN1START

MeasResults ::=                     SEQUENCE {
    measId                              MeasId,
    measResultPCell                 SEQUENCE {
        rsrpResult                          RSRP-Range,
        rsrqResult                          RSRQ-Range
    },
    measResultNeighCells                CHOICE {
        measResultListEUTRA                 MeasResultListEUTRA,
        measResultListUTRA                  MeasResultListUTRA,
        measResultListGERAN                 MeasResultListGERAN,
        measResultsCDMA2000                 MeasResultsCDMA2000,
        ...
    }                                                                   OPTIONAL,
    ...,
    [[  measResultForECID-r9                MeasResultForECID-r9        OPTIONAL
    ]],
    [[  locationInfo-r10                    LocationInfo-r10            OPTIONAL,
        measResultServFreqList-r10          MeasResultServFreqList-r10  OPTIONAL
    ]],
    [[  measId-v1250                        MeasId-v1250                OPTIONAL,
        measResultPCell-v1250               RSRQ-Range-v1250            OPTIONAL,
        measResultCSI-RS-List-r12           MeasResultCSI-RS-List-r12   OPTIONAL
    ]],
    [[  measResultForRSSI-r13               MeasResultForRSSI-r13       OPTIONAL,
        measResultServFreqListExt-r13       MeasResultServFreqListExt-r13 OPTIONAL,
        measResultSSTD-r13                  MeasResultSSTD-r13          OPTIONAL,
        measResultPCell-v1310               SEQUENCE {
            rs-sinr-Result-r13                  RS-SINR-Range-r13
        }                                                               OPTIONAL,
        ul-PDCP-DelayResultList-r13         UL-PDCP-DelayResultList-r13 OPTIONAL,
        measResultListWLAN-r13              MeasResultListWLAN-r13      OPTIONAL
    ]]

}

MeasResultListEUTRA ::=             SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultEUTRA

MeasResultEUTRA ::= SEQUENCE {
    physCellId                          PhysCellId,
    cgi-Info                            SEQUENCE {
        cellGlobalId                        CellGlobalIdEUTRA,
        trackingAreaCode                    TrackingAreaCode,
        plmn-IdentityList                   PLMN-IdentityList2          OPTIONAL
    }                                                       OPTIONAL,
    measResult                          SEQUENCE {
        rsrpResult                          RSRP-Range                  OPTIONAL,
        rsrqResult                          RSRQ-Range                  OPTIONAL,
        ...,
        [[  additionalSI-Info-r9                AdditionalSI-Info-r9    OPTIONAL
        ]],
        [[  primaryPLMN-Suitable-r12            ENUMERATED {true}       OPTIONAL,
            measResult-v1250                    RSRQ-Range-v1250        OPTIONAL
        ]],
        [[  rs-sinr-Result-r13                  RS-SINR-Range-r13       OPTIONAL,
            cgi-Info-v1310                      SEQUENCE {
                freqBandIndicator-r13               FreqBandIndicator-r11       OPTIONAL,
                multiBandInfoList-r13               MultiBandInfoList-r11       OPTIONAL,
```


DAINGEAN_0002213

```
                freqBandIndicatorPriority-r13       ENUMERATED {true}           OPTIONAL
            }                                                                   OPTIONAL
        ]]
    }
}

MeasResultServFreqList-r10 ::=  SEQUENCE (SIZE (1..maxServCell-r10)) OF MeasResultServFreq-r10

MeasResultServFreqListExt-r13 ::=   SEQUENCE (SIZE (1..maxServCell-r13)) OF MeasResultServFreq-r13

MeasResultServFreq-r10 ::=          SEQUENCE {
    servFreqId-r10                      ServCellIndex-r10,
    measResultSCell-r10                 SEQUENCE {
        rsrpResultSCell-r10                 RSRP-Range,
        rsrqResultSCell-r10                 RSRQ-Range
    }                                                           OPTIONAL,
    measResultBestNeighCell-r10         SEQUENCE {
        physCellId-r10                      PhysCellId,
        rsrpResultNCell-r10                 RSRP-Range,
        rsrqResultNCell-r10                 RSRQ-Range
    }                                                           OPTIONAL,
    ...,
    [[  measResultSCell-v1250               RSRQ-Range-v1250    OPTIONAL,
        measResultBestNeighCell-v1250       RSRQ-Range-v1250    OPTIONAL
    ]],
    [[  measResultSCell-v1310               SEQUENCE {
            rs-sinr-Result-r13                  RS-SINR-Range-r13
        }       OPTIONAL,
        measResultBestNeighCell-v1310       SEQUENCE {
            rs-sinr-Result-r13                  RS-SINR-Range-r13
        }       OPTIONAL
    ]]
}

MeasResultServFreq-r13 ::=          SEQUENCE {
    servFreqId-r13                      ServCellIndex-r13,
    measResultSCell-r13                 SEQUENCE {
        rsrpResultSCell-r13                 RSRP-Range,
        rsrqResultSCell-r13                 RSRQ-Range-r13,
        rs-sinr-Result-r13                  RS-SINR-Range-r13   OPTIONAL
    }                                                           OPTIONAL,
    measResultBestNeighCell-r13         SEQUENCE {
        physCellId-r13                      PhysCellId,
        rsrpResultNCell-r13                 RSRP-Range,
        rsrqResultNCell-r13                 RSRQ-Range-r13,
        rs-sinr-Result-r13                  RS-SINR-Range-r13   OPTIONAL
    }                                                           OPTIONAL,
    ...
}

MeasResultCSI-RS-List-r12 ::=   SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultCSI-RS-r12

MeasResultCSI-RS-r12 ::=        SEQUENCE {
    measCSI-RS-Id-r12               MeasCSI-RS-Id-r12,
    csi-RSRP-Result-r12             CSI-RSRP-Range-r12,
    ...
}

MeasResultListUTRA ::=              SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultUTRA

MeasResultUTRA ::=  SEQUENCE {
    physCellId                          CHOICE {
        fdd                                 PhysCellIdUTRA-FDD,
        tdd                                 PhysCellIdUTRA-TDD
    },
    cgi-Info                            SEQUENCE {
        cellGlobalId                        CellGlobalIdUTRA,
        locationAreaCode                    BIT STRING (SIZE (16))          OPTIONAL,
        routingAreaCode                     BIT STRING (SIZE (8))           OPTIONAL,
        plmn-IdentityList                   PLMN-IdentityList2              OPTIONAL
    }                                                           OPTIONAL,
    measResult                          SEQUENCE {
        utra-RSCP                           INTEGER (-5..91)                OPTIONAL,
        utra-EcN0                           INTEGER (0..49)                 OPTIONAL,
        ...,
        [[  additionalSI-Info-r9                AdditionalSI-Info-r9                OPTIONAL
        ]],
        [[  primaryPLMN-Suitable-r12            ENUMERATED {true}           OPTIONAL
```


DAINGEAN_0002214

```
        ]]
    }
}

MeasResultListGERAN ::=             SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultGERAN

MeasResultGERAN ::= SEQUENCE {
    carrierFreq                         CarrierFreqGERAN,
    physCellId                          PhysCellIdGERAN,
    cgi-Info                            SEQUENCE {
        cellGlobalId                        CellGlobalIdGERAN,
        routingAreaCode                     BIT STRING (SIZE (8))           OPTIONAL
    }                                                                       OPTIONAL,
    measResult                          SEQUENCE {
        rssi                                INTEGER (0..63),
        ...
    }
}

MeasResultsCDMA2000 ::=             SEQUENCE {
    preRegistrationStatusHRPD           BOOLEAN,
    measResultListCDMA2000              MeasResultListCDMA2000
}

MeasResultListCDMA2000 ::=          SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultCDMA2000

MeasResultCDMA2000 ::=  SEQUENCE {
    physCellId                          PhysCellIdCDMA2000,
    cgi-Info                            CellGlobalIdCDMA2000                OPTIONAL,
    measResult                          SEQUENCE {
        pilotPnPhase                        INTEGER (0..32767)              OPTIONAL,
        pilotStrength                       INTEGER (0..63),
        ...
    }
}

MeasResultListWLAN-r13 ::=      SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultWLAN-r13

MeasResultWLAN-r13 ::=  SEQUENCE {
    wlan-Identifiers-r13                    WLAN-Identifiers-r12,
    carrierInfoWLAN-r13                     WLAN-CarrierInfo-r13    OPTIONAL,
    bandWLAN-r13                            WLAN-BandIndicator-r13  OPTIONAL,
    rssiWLAN-r13                            WLAN-RSSI-Range-r13,
    availableAdmissionCapacityWLAN-r13      INTEGER (0..31250)      OPTIONAL,
    backhaulDL-BandwidthWLAN-r13            WLAN-backhaulRate-r12   OPTIONAL,
    backhaulUL-BandwidthWLAN-r13            WLAN-backhaulRate-r12   OPTIONAL,
    channelUtilizationWLAN-r13              INTEGER (0..255)        OPTIONAL,
    stationCountWLAN-r13                    INTEGER (0..65535)      OPTIONAL,
    connectedWLAN-r13                       ENUMERATED {true}       OPTIONAL,
    ...
}

MeasResultForECID-r9 ::=        SEQUENCE {
    ue-RxTxTimeDiffResult-r9                INTEGER (0..4095),
    currentSFN-r9                           BIT STRING (SIZE (10))
}

PLMN-IdentityList2 ::=              SEQUENCE (SIZE (1..5)) OF PLMN-Identity

AdditionalSI-Info-r9 ::=            SEQUENCE {
    csg-MemberStatus-r9             ENUMERATED {member}             OPTIONAL,
    csg-Identity-r9                     CSG-Identity                        OPTIONAL
}
MeasResultForRSSI-r13 ::=           SEQUENCE {
    rssi-Result-r13                         RSSI-Range-r13,
    channelOccupancy-r13                    INTEGER (0..100),
    ...
}

UL-PDCP-DelayResultList-r13 ::=     SEQUENCE (SIZE (1..maxQCI-r13)) OF UL-PDCP-DelayResult-r13


UL-PDCP-DelayResult-r13 ::=         SEQUENCE {
    qci-Id-r13                          ENUMERATED {qci1, qci2, qci3, qci4, spare4, spare3, spare2,
                                        spare1},
    excessDelay-r13                     INTEGER (0..31),
    ...
}
```


DAINGEAN_0002215

```
-- ASN1STOP
```

***MeasResults* field descriptions**
availableAdmissionCapacityWLAN Indicates the available admission capacity of WLAN as defined in IEEE 802.11-2012 [67].
backhaulDL-BandwidthWLAN Indicates the backhaul available downlink bandwidth of WLAN, equal to Downlink Speed times Downlink Load defined in Wi-Fi Alliance Hotspot 2.0 [76].
backhaulUL-BandwidthWLAN Indicates the backhaul available uplink bandwidth of WLAN, equal to Uplink Speed times Uplink Load defined in Wi-Fi Alliance Hotspot 2.0 [76].
bandWLAN Indicates the WLAN band.
carrierInfoWLAN Indicates the WLAN channel information.
channelOccupancy Indicates the percentage of samples when the RSSI was above the configured *channelOccupancyThreshold* for the associated *reportConfig*.
channelUtilizationWLAN Indicates WLAN channel utilization as defined in IEEE 802.11-2012 [67].
connectedWLAN Indicates whether the UE is connected to the WLAN for which the measurement results are applicable.
csg-MemberStatus Indicates whether or not the UE is a member of the CSG of the neighbour cell.
currentSFN Indicates the current system frame number when receiving the UE Rx-Tx time difference measurement results from lower layer.
excessDelay Indicates excess queueing delay ratio in UL, according to excess delay ratio measurement report mapping table, as defined in TS 36.314 [71, Table 4.2.1.1.1-1]
locationAreaCode A fixed length code identifying the location area within a PLMN, as defined in TS 23.003 [27].
measId Identifies the measurement identity for which the reporting is being performed. If the *measId-v1250* is included, the *measId* (i.e. without a suffix) is ignored by eNB.
measResult Measured result of an E-UTRA cell; Measured result of a UTRA cell; Measured result of a GERAN cell or frequency; Measured result of a CDMA2000 cell; Measured result of a WLAN; Measured result of UE Rx–Tx time difference; Measured result of UE SFN, radio frame and subframe timing difference; or Measured result of RSSI and channel occupancy.
measResultCSI-RS-List Measured results of the CSI-RS resources in discovery signals measurement.
measResultListCDMA2000 List of measured results for the maximum number of reported best cells for a CDMA2000 measurement identity.
measResultListEUTRA List of measured results for the maximum number of reported best cells for an E-UTRA measurement identity.
measResultListGERAN List of measured results for the maximum number of reported best cells or frequencies for a GERAN measurement identity.
measResultListUTRA List of measured results for the maximum number of reported best cells for a UTRA measurement identity.
measResultListWLAN List of measured results for the maximum number of reported best WLAN outside the WLAN mobility set and connected WLAN, if any, for a WLAN measurement identity.
measResultPCell Measured result of the PCell.
measResultsCDMA2000 Contains the CDMA2000 HRPD pre-registration status and the list of CDMA2000 measurements.

DAINGEAN_0002216

MeasResults field descriptions
MeasResultServFreqList Measured results of the serving frequencies: the measurement result of each SCell, if any, and of the best neighbouring cell on each serving frequency.
pilotPnPhase Indicates the arrival time of a CDMA2000 pilot, measured relative to the UE's time reference in units of PN chips, see C.S0005 [25]. This information is used in either SRVCC handover or enhanced 1xRTT CS fallback procedure to CDMA2000 1xRTT.
pilotStrength CDMA2000 Pilot Strength, the ratio of pilot power to total power in the signal bandwidth of a CDMA2000 Forward Channel. See C.S0005 [25] for CDMA2000 1xRTT and C.S0024 [26] for CDMA2000 HRPD.
plmn-IdentityList The list of PLMN Identity read from broadcast information when the multiple PLMN Identities are broadcast.
preRegistrationStatusHRPD Set to TRUE if the UE is currently pre-registered with CDMA2000 HRPD. Otherwise set to FALSE. This can be ignored by the eNB for CDMA2000 1xRTT.
qci-Id Indicates QCI value for which *excessDelay* is provided, according to TS 36.314 [71].
routingAreaCode The RAC identity read from broadcast information, as defined in TS 23.003 [27].
rsrpResult Measured RSRP result of an E-UTRA cell. The rsrpResult is only reported if configured by the eNB.
rsrqResult Measured RSRQ result of an E-UTRA cell. The rsrqResult is only reported if configured by the eNB.
rssi GERAN Carrier RSSI. RXLEV is mapped to a value between 0 and 63, TS 45.008 [28]. When mapping the RXLEV value to the RSSI bit string, the first/leftmost bit of the bit string contains the most significant bit.
rssi-Result Measured RSSI result in dBm.
rs-sinr-Result Measured RS-SINR result of an E-UTRA cell. The *rs-sinr-Result* is only reported if configured by the eNB.
rssiWLAN Measured WLAN RSSI result in dBm.
stationCountWLAN Indicates the total number stations currently associated with this WLAN as defined in IEEE 802.11-2012 [67].
ue-RxTxTimeDiffResult UE Rx-Tx time difference measurement result of the PCell, provided by lower layers. According to UE Rx-Tx time difference report mapping in TS 36.133 [16].
utra-EcN0 According to CPICH_Ec/No in TS 25.133 [29] for FDD. Fourteen spare values. The field is not present for TDD.
utra-RSCP According to CPICH_RSCP in TS 25.133 [29] for FDD and P-CCPCH_RSCP in TS 25.123 [30] for TDD. Thirty-one spare values.
wlan-Identifiers Indicates the WLAN parameters used for identification of the WLAN for which the measurement results are applicable.

– *MeasResultSSTD*

The IE *MeasResultSSTD* consists of SFN, radio frame and subframe boundary difference between the PCell and the PSCell as specified in TS 36.214 [48] and TS 36.133 [16].

***MeasResultSSTD* information element**

```
-- ASN1START

MeasResultSSTD-r13 ::=                  SEQUENCE {
    sfn-OffsetResult-r13                    INTEGER (0..1023),
    frameBoundaryOffsetResult-r13           INTEGER (-4..5),
    subframeBoundaryOffsetResult-r13        INTEGER (0..63)
}

-- ASN1STOP
```


DAINGEAN_0002217

***MeasResultSSTD* field descriptions**
sfn-OffsetResult
Indicates the SFN difference between the PCell and the PSCell as an integer value according to TS 36.214 [48].
frameBoundaryOffsetResult
Indicates the frame boundary difference between the PCell and the PSCell as an integer value according to TS 36.214 [48].
subframeBoundaryOffsetResult
Indicates the subframe boundary difference between the PCell and the PSCell as an integer value according to the mapping table in TS 36.133 [16].

– *MeasScaleFactor*

The IE *MeasScaleFactor* specifies the factor for scaling the measurement performance requirements in TS 36.133 [16].

MeasScaleFactor information element

```
-- ASN1START

MeasScaleFactor-r12 ::=          ENUMERATED {sf-EUTRA-cf1, sf-EUTRA-cf2}

-- ASN1STOP
```

NOTE: If the *reducedMeasPerformance* is not included in any *measObjectEUTRA* or *measObjectUTRA* and the *measScaleFactor* is included in the *measConfig*, E-UTRAN can configure any of the values for the *measScaleFactor* as specified in TS 36.133 [16].

– *QuantityConfig*

The IE *QuantityConfig* specifies the measurement quantities and layer 3 filtering coefficients for E-UTRA and inter-RAT measurements.

QuantityConfig information element

```
-- ASN1START

QuantityConfig ::=                  SEQUENCE {
    quantityConfigEUTRA                 QuantityConfigEUTRA                 OPTIONAL,   -- Need ON
    quantityConfigUTRA                  QuantityConfigUTRA                  OPTIONAL,   -- Need ON
    quantityConfigGERAN                 QuantityConfigGERAN                 OPTIONAL,   -- Need ON
    quantityConfigCDMA2000              QuantityConfigCDMA2000              OPTIONAL,   -- Need ON
    ...,
    [[  quantityConfigUTRA-v1020        QuantityConfigUTRA-v1020            OPTIONAL    -- Need ON
    ]],
    [[  quantityConfigEUTRA-v1250       QuantityConfigEUTRA-v1250           OPTIONAL    -- Need ON
    ]],
    [[  quantityConfigEUTRA-v1310       QuantityConfigEUTRA-v1310           OPTIONAL,   -- Need ON
        quantityConfigWLAN-r13          QuantityConfigWLAN-r13              OPTIONAL    -- Need ON
    ]]
}

QuantityConfigEUTRA ::=             SEQUENCE {
    filterCoefficientRSRP               FilterCoefficient                   DEFAULT fc4,
    filterCoefficientRSRQ               FilterCoefficient                   DEFAULT fc4
}

QuantityConfigEUTRA-v1250 ::=       SEQUENCE {
    filterCoefficientCSI-RSRP-r12       FilterCoefficient                   OPTIONAL        -- Need
OR
}

QuantityConfigEUTRA-v1310 ::=       SEQUENCE {
    filterCoefficientRS-SINR-r13        FilterCoefficient                   DEFAULT fc4
}

QuantityConfigUTRA ::=              SEQUENCE {
    measQuantityUTRA-FDD                ENUMERATED {cpich-RSCP, cpich-EcN0},
    measQuantityUTRA-TDD                ENUMERATED {pccpch-RSCP},
```


DAINGEAN_0002218

```
    filterCoefficient                   FilterCoefficient                   DEFAULT fc4
}

QuantityConfigUTRA-v1020 ::=        SEQUENCE {
    filterCoefficient2-FDD-r10          FilterCoefficient                   DEFAULT fc4
}

QuantityConfigGERAN ::=             SEQUENCE {
    measQuantityGERAN                   ENUMERATED {rssi},
    filterCoefficient                   FilterCoefficient                   DEFAULT fc2
}

QuantityConfigCDMA2000 ::=          SEQUENCE {
    measQuantityCDMA2000                ENUMERATED {pilotStrength, pilotPnPhaseAndPilotStrength}
}

QuantityConfigWLAN-r13 ::=          SEQUENCE {
    measQuantityWLAN-r13                ENUMERATED {rssiWLAN},
    filterCoefficient-r13               FilterCoefficient                   DEFAULT fc4
}

-- ASN1STOP
```

***QuantityConfig* field descriptions**
filterCoefficient2-FDD
Specifies the filtering coefficient used for the UTRAN FDD measurement quantity, which is not included in *measQuantityUTRA-FDD*, when *reportQuantityUTRA-FDD* is present in *ReportConfigInterRAT*.
filterCoefficientCSI-RSRP
Specifies the filtering coefficient used for CSI-RSRP.
filterCoefficientRSRP
Specifies the filtering coefficient used for RSRP.
filterCoefficientRSRQ
Specifies the filtering coefficient used for RSRQ.
filterCoefficientRS-SINR
Specifies the filtering coefficient used for RS-SINR.
measQuantityCDMA2000
Measurement quantity used for CDMA2000 measurements. *pilotPnPhaseAndPilotStrength* is only applicable for *MeasObjectCDMA2000* of *cdma2000-Type = type1XRTT*.
measQuantityGERAN
Measurement quantity used for GERAN measurements.
measQuantityUTRA
Measurement quantity used for UTRA measurements.
measQuantityWLAN
Measurement quantity used for WLAN measurements.
quantityConfigCDMA2000
Specifies quantity configurations for CDMA2000 measurements.
quantityConfigEUTRA
Specifies filter configurations for E-UTRA measurements.
quantityConfigGERAN
Specifies quantity and filter configurations for GERAN measurements.
quantityConfigUTRA
Specifies quantity and filter configurations for UTRA measurements. Field *quantityConfigUTRA-v1020* is applicable only when reportQuantityUTRA-FDD is configured.
quantityConfigWLAN
Specifies quantity and filter configurations for WLAN measurements.

– *ReportConfigEUTRA*

The IE *ReportConfigEUTRA* specifies criteria for triggering of an E-UTRA measurement reporting event. The E-UTRA measurement reporting events concerning CRS are labelled A*N* with *N* equal to 1, 2 and so on.

DAINGEAN_0002219

Event A1: Serving becomes better than absolute threshold;

Event A2: Serving becomes worse than absolute threshold;

Event A3: Neighbour becomes amount of offset better than PCell/ PSCell;

Event A4: Neighbour becomes better than absolute threshold;

Event A5: PCell/ PSCell becomes worse than absolute threshold1 AND Neighbour becomes better than another absolute threshold2.

Event A6: Neighbour becomes amount of offset better than SCell.

The E-UTRA measurement reporting events concerning CSI-RS are labelled C*N* with *N* equal to 1 and 2.

Event C1: CSI-RS resource becomes better than absolute threshold;

Event C2: CSI-RS resource becomes amount of offset better than reference CSI-RS resource.

ReportConfigEUTRA information element

```
-- ASN1START

ReportConfigEUTRA ::=                SEQUENCE {
    triggerType                          CHOICE {
        event                                SEQUENCE {
            eventId                              CHOICE {
                eventA1                              SEQUENCE {
                    a1-Threshold                         ThresholdEUTRA
                },
                eventA2                              SEQUENCE {
                    a2-Threshold                         ThresholdEUTRA
                },
                eventA3                              SEQUENCE {
                    a3-Offset                            INTEGER (-30..30),
                    reportOnLeave                        BOOLEAN
                },
                eventA4                              SEQUENCE {
                    a4-Threshold                         ThresholdEUTRA
                },
                eventA5                              SEQUENCE {
                    a5-Threshold1                        ThresholdEUTRA,
                    a5-Threshold2                        ThresholdEUTRA
                },
                ...,
                eventA6-r10                          SEQUENCE {
                    a6-Offset-r10                        INTEGER (-30..30),
                    a6-ReportOnLeave-r10                 BOOLEAN
                },
                eventC1-r12                          SEQUENCE {
                    c1-Threshold-r12                     ThresholdEUTRA-v1250,
                    c1-ReportOnLeave-r12                 BOOLEAN
                },
                eventC2-r12                          SEQUENCE {
                    c2-RefCSI-RS-r12                     MeasCSI-RS-Id-r12,
                    c2-Offset-r12                        INTEGER (-30..30),
                    c2-ReportOnLeave-r12                 BOOLEAN
                }
            },
            hysteresis                           Hysteresis,
            timeToTrigger                        TimeToTrigger
        },
        periodical                               SEQUENCE {
            purpose                                  ENUMERATED {
                                                         reportStrongestCells, reportCGI}
        }
    },
    triggerQuantity                  ENUMERATED {rsrp, rsrq},
    reportQuantity                   ENUMERATED {sameAsTriggerQuantity, both},
    maxReportCells                   INTEGER (1..maxCellReport),
    reportInterval                   ReportInterval,
    reportAmount                     ENUMERATED {r1, r2, r4, r8, r16, r32, r64, infinity},
    ...,
    [[  si-RequestForHO-r9               ENUMERATED {setup}      OPTIONAL,   -- Cond reportCGI
        ue-RxTxTimeDiffPeriodical-r9     ENUMERATED {setup}      OPTIONAL    -- Need OR
```


DAINGEAN_0002220

```
    ]],
    [[  includeLocationInfo-r10             ENUMERATED {true}       OPTIONAL,   -- Need OR
        reportAddNeighMeas-r10              ENUMERATED {setup}      OPTIONAL    -- Need OR
    ]],
    [[  alternativeTimeToTrigger-r12        CHOICE {
            release                             NULL,
            setup                               TimeToTrigger
        }                                                   OPTIONAL,   -- Need ON
        useT312-r12                         BOOLEAN         OPTIONAL,   -- Need ON
        usePSCell-r12                       BOOLEAN         OPTIONAL,   -- Need ON
        aN-Threshold1-v1250                 RSRQ-RangeConfig-r12        OPTIONAL,   -- Need ON
        a5-Threshold2-v1250                 RSRQ-RangeConfig-r12        OPTIONAL,   -- Need ON
        reportStrongestCSI-RSs-r12          BOOLEAN         OPTIONAL,   -- Need ON
        reportCRS-Meas-r12                  BOOLEAN         OPTIONAL,   -- Need ON
        triggerQuantityCSI-RS-r12           BOOLEAN         OPTIONAL        -- Need ON
    ]],
    [[  reportSSTD-Meas-r13                 BOOLEAN         OPTIONAL,       -- Need ON
        rs-sinr-Config-r13                  CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                triggerQuantity-v1310               ENUMERATED {sinr}       OPTIONAL,   -- Need ON
                aN-Threshold1-r13                   RS-SINR-Range-r13       OPTIONAL,   -- Need ON
                a5-Threshold2-r13                   RS-SINR-Range-r13       OPTIONAL,   -- Need ON
                reportQuantity-v1310                ENUMERATED {rsrpANDsinr, rsrqANDsinr, all}
            }
        }                                                               OPTIONAL,   -- Need ON
        useWhiteCellList-r13                BOOLEAN                     OPTIONAL,   -- Need ON
        measRSSI-ReportConfig-r13           MeasRSSI-ReportConfig-r13   OPTIONAL,   -- Need ON
        includeMultiBandInfo-r13            ENUMERATED {true}           OPTIONAL,   -- Cond
reportCGI
        ul-DelayConfig-r13                  UL-DelayConfig-r13          OPTIONAL    -- Need ON
    ]]
}

RSRQ-RangeConfig-r12 ::=            CHOICE {
    release                             NULL,
    setup                               RSRQ-Range-v1250
}

ThresholdEUTRA ::=                  CHOICE{
    threshold-RSRP                      RSRP-Range,
    threshold-RSRQ                      RSRQ-Range
}

ThresholdEUTRA-v1250 ::=            CSI-RSRP-Range-r12

MeasRSSI-ReportConfig-r13 ::=   SEQUENCE {
    channelOccupancyThreshold-r13       RSSI-Range-r13              OPTIONAL    -- Need OR
}

-- ASN1STOP
```


DAINGEAN_0002221

ReportConfigEUTRA field descriptions
a3-Offset/ a6-Offset/ c2-Offset Offset value to be used in EUTRA measurement report triggering condition for event a3/ a6/ c2. The actual value is field value * 0.5 dB.
alternativeTimeToTrigger Indicates the time to trigger applicable for cells specified in *altTTT-CellsToAddModList* of the associated measurement object, if configured
aN-ThresholdM/ cN-ThresholdM Threshold to be used in EUTRA measurement report triggering condition for event number aN/ cN. If multiple thresholds are defined for event number aN/ cN, the thresholds are differentiated by M. E-UTRAN configures *aN-Threshold1* only for events A1, A2, A4, A5 and *a5-Threshold2* only for event A5.
c1-ReportOnLeave/ c2-ReportOnLeave Indicates whether or not the UE shall initiate the measurement reporting procedure when the leaving condition is met for a CSI-RS resource in *csi-RS-TriggeredList*, as specified in 5.5.4.1.
c2-RefCSI-RS Identity of the CSI-RS resource from the *measCSI-RS-ToAddModList* of the associated *measObject*, to be used as the reference CSI-RS resource in EUTRA measurement report triggering condition for event c2.
channelOccupancyThreshold RSSI threshold which is used for channel occupancy evaluation.
eventId Choice of E-UTRA event triggered reporting criteria. EUTRAN may set this field to *eventC1* or *eventC2* only if *measDS-Config* is configured in the associated *measObject* with one or more CSI-RS resources. The *eventC1* and *eventC2* are not applicable for the *eventId* if RS-SINR is configured as *triggerQuantity* or *reportQuantity*.
includeMultiBandInfo If this field is present, the UE shall acquire and include multi band information in the measurement report.
maxReportCells Max number of cells, excluding the serving cell, to include in the measurement report concerning CRS, and max number of CSI-RS resources to include in the measurement report concerning CSI-RS.
measRSSI-ReportConfig If this field is present, the UE shall perform measurement reporting for RSSI and channel occupancy. E-UTRAN only sets this field to *true* when setting *triggerType* to *periodical* and *purpose* to *reportStrongestCells*.
reportAmount Number of measurement reports applicable for *triggerType event* as well as for *triggerType periodical*. In case *purpose* is set to *reportCGI* or *reportSSTD-Meas* is set to *true*, only value 1 applies.
reportCRS-Meas Inidicates that UE shall include rsrp, rsrq together with csi-rsrp in the measurement report, if possible.
reportOnLeave/ a6-ReportOnLeave Indicates whether or not the UE shall initiate the measurement reporting procedure when the leaving condition is met for a cell in *cellsTriggeredList*, as specified in 5.5.4.1.
reportQuantity The quantities to be included in the measurement report**.** The value both means that both the rsrp and rsrq quantities are to be included in the measurement report. The value *rsrpANDsinr* and *rsrqANDsinr* mean that both *rsrp* and *rs-sinr* quantities, and both *rsrq* and *rs-sinr* quantities are to be included respectively in the measurement report. The value *all* means that *rsrp*, *rsrq* and *rs-sinr* are to be included in the measurement report. In case *triggerQuantityCSI-RS* is included, only value *sameAsTriggerQuantity* applies.
reportSSTD-Meas If this field is set to *true*, the UE shall measure SSTD between the PCell and the PSCell as specified in TS 36.214 [48] and ignore the *triggerQuantity*, *reportQuantity* and *maxReportCells* fields. E-UTRAN only sets this field to *true* when setting *triggerType* to *periodical* and *purpose* to *reportStrongestCells*.
reportStrongestCSI-RSs Indicates that periodical CSI-RS measurement report is performed. EUTRAN configures value *TRUE* only if *measDS-Config* is configured in the associated *measObject* with one or more CSI-RS resources.
si-RequestForHO The field applies to the *reportCGI* functionality, and when the field is included, the UE is allowed to use autonomous gaps in acquiring system information from the neighbour cell, applies a different value for T321, and includes different fields in the measurement report.
ThresholdEUTRA For RSRP: RSRP based threshold for event evaluation. The actual value is field value – 140 dBm. For RSRQ: RSRQ based threshold for event evaluation. The actual value is (field value – 40)/2 dB. For RS-SINR: RS-SINR based threshold for event evaluation. The actual value is (field value -46)/2 dB. For CSI-RSRP: CSI-RSRP based threshold for event evaluation. The actual value is field value – 140 dBm. EUTRAN configures the same threshold quantity for all the thresholds of an event.
timeToTrigger Time during which specific criteria for the event needs to be met in order to trigger a measurement report.

DAINGEAN_0002222

ReportConfigEUTRA field descriptions
triggerQuantity
The quantity used to evaluate the triggering condition for the event concerning CRS. EUTRAN sets the value according to the quantity of the *ThresholdEUTRA* for this event. The values rsrp, rsrq and *sinr* correspond to Reference Signal Received Power (RSRP), Reference Signal Received Quality (RSRQ) and Reference Signal Signal to Noise and Interference Ratio (RS-SINR), see TS 36.214 [48].
triggerQuantityCSI-RS
The quantity used to evaluate the triggering condition for the event concerning CSI-RS. The value *TRUE* corresponds to CSI Reference Signal Received Power (CSI-RSRP), see TS 36.214 [48]. E-UTRAN configures value *TRUE* if and only if the measurement reporting event concerns CSI-RS.
ue-RxTxTimeDiffPeriodical
If this field is present, the UE shall perform UE Rx-Tx time difference measurement reporting and ignore the fields *triggerQuantity*, *reportQuantity* and *maxReportCells*. If the field is present, the only applicable values for the corresponding *triggerType* and *purpose* are periodical and reportStrongestCells respectively.
usePSCell
If this field is set to *TRUE* the UE shall use the PSCell instead of the PCell. E-UTRAN configures value *TRUE* only *TRU* events A3 and A5, see 5.5.4.4 and 5.5.4.6.
useT312
If value *TRUE* is configured, the UE shall use the timer T312 with the value *t312* as specified in the corresponding *measObject*. If the corresponding *measObject* does not include the timer T312 then the timer T312 is considered as not configured. E-UTRAN configures value *TRUE* only if *triggerType* is set to *event*.
useWhiteCellList
Indicates whether only the cells included in the white-list of the associated *measObject* are applicable as specified in 5.5.4.1. E-UTRAN does not configure the field for events A1, A2, C1 and C2
ul-DelayConfig
If the field is present, E-UTRAN configures UL PDCP Packet Delay per QCI measurement and the UE shall ignore the fields *triggerQuantity* and *maxReportCells*. The applicable values for the corresponding *triggerType* and *reportInterval* are *periodical* and (one of the) ms1024, ms2048, ms5120 or ms10240 respectively.The *reportInterval* indicates the periodicity for performing and reporting of UL PDCP Delay per QCI measurement as specified in TS 36.314 [71].

Conditional presence	Explanation
reportCGI	The field is optional, need OR, in case *purpose* is included and set to *reportCGI*; otherwise the field is not present and the UE shall delete any existing value for this field.

– *ReportConfigId*

The IE *ReportConfigId* is used to identify a measurement reporting configuration.

***ReportConfigId* information element**

```
-- ASN1START

ReportConfigId ::=                INTEGER (1..maxReportConfigId)

-- ASN1STOP
```

– *ReportConfigInterRAT*

The IE *ReportConfigInterRAT* specifies criteria for triggering of an inter-RAT measurement reporting event. The inter-RAT measurement reporting events for UTRAN, GERAN and CDMA2000 are labelled B*N* with *N* equal to 1, 2 and so on. The inter-RAT measurement reporting events for WLAN are labelled W*N* with *N* equal to 1, 2 and so on.

DAINGEAN_0002223

Event B1: Neighbour becomes better than absolute threshold;

Event B2: PCell becomes worse than absolute threshold1 AND Neighbour becomes better than another absolute threshold2.

Event W1: WLAN becomes better than a threshold;

Event W2: All WLAN inside WLAN mobility set become worse than a threshold1 and a WLAN outside WLAN mobility set becomes better than a threshold2;

Event W3: All WLAN inside WLAN mobility set become worse than a threshold.

The b1 and b2 event thresholds for CDMA2000 are the CDMA2000 pilot detection thresholds are expressed as an unsigned binary number equal to [-2 x 10 log 10 E_c/I_o] in units of 0.5dB, see C.S0005 [25] for details.

ReportConfigInterRAT information element

```
-- ASN1START

ReportConfigInterRAT ::=            SEQUENCE {
    triggerType                         CHOICE {
        event                               SEQUENCE {
            eventId                             CHOICE {
                eventB1                             SEQUENCE {
                    b1-Threshold                        CHOICE {
                        b1-ThresholdUTRA                    ThresholdUTRA,
                        b1-ThresholdGERAN                   ThresholdGERAN,
                        b1-ThresholdCDMA2000                ThresholdCDMA2000
                    }
                },
                eventB2                             SEQUENCE {
                    b2-Threshold1                       ThresholdEUTRA,
                    b2-Threshold2                       CHOICE {
                        b2-Threshold2UTRA                   ThresholdUTRA,
                        b2-Threshold2GERAN                  ThresholdGERAN,
                        b2-Threshold2CDMA2000               ThresholdCDMA2000
                    }
                },
                ...,
                eventW1-r13                     SEQUENCE {
                    w1-Threshold-r13            WLAN-RSSI-Range-r13
                },
                eventW2-r13                     SEQUENCE {
                    w2-Threshold1-r13           WLAN-RSSI-Range-r13,
                    w2-Threshold2-r13           WLAN-RSSI-Range-r13
                },
                eventW3-r13                     SEQUENCE {
                    w3-Threshold-r13            WLAN-RSSI-Range-r13
                }
            },
            hysteresis                      Hysteresis,
            timeToTrigger                   TimeToTrigger
        },
        periodical                              SEQUENCE {
            purpose                                 ENUMERATED {
                                                        reportStrongestCells,
                                                        reportStrongestCellsForSON,
                                                        reportCGI}
        }
    },
    maxReportCells                  INTEGER (1..maxCellReport),
    reportInterval                  ReportInterval,
    reportAmount                    ENUMERATED {r1, r2, r4, r8, r16, r32, r64, infinity},
    ...,
    [[  si-RequestForHO-r9              ENUMERATED {setup}      OPTIONAL    -- Cond reportCGI
    ]],
    [[  reportQuantityUTRA-FDD-r10      ENUMERATED {both}       OPTIONAL    -- Need OR
    ]],
    [[  includeLocationInfo-r11         BOOLEAN                 OPTIONAL    -- Need ON
    ]],
    [[  b2-Threshold1-v1250             CHOICE {
            release                         NULL,
            setup                           RSRQ-Range-v1250
        }                                                       OPTIONAL    -- Need ON
    ]],
```


DAINGEAN_0002224

```
    [[  reportQuantityWLAN-r13              ReportQuantityWLAN-r13  OPTIONAL    -- Need ON
    ]]
}

ThresholdUTRA ::=                   CHOICE{
    utra-RSCP                           INTEGER (-5..91),
    utra-EcN0                           INTEGER (0..49)
}

ThresholdGERAN ::=              INTEGER (0..63)

ThresholdCDMA2000 ::=           INTEGER (0..63)

ReportQuantityWLAN-r13 ::=      SEQUENCE {
    bandRequestWLAN-r13                             ENUMERATED {true}   OPTIONAL,   -- Need OR
    carrierInfoRequestWLAN-r13                      ENUMERATED {true}   OPTIONAL,   -- Need OR
    availableAdmissionCapacityRequestWLAN-r13       ENUMERATED {true}   OPTIONAL,   -- Need ON
    backhaulDL-BandwidthRequestWLAN-r13             ENUMERATED {true}   OPTIONAL,   -- Need OR
    backhaulUL-BandwidthRequestWLAN-r13             ENUMERATED {true}   OPTIONAL,   -- Need OR
    channelUtilizationRequestWLAN-r13               ENUMERATED {true}   OPTIONAL,   -- Need OR
    stationCountRequestWLAN-r13                     ENUMERATED {true}   OPTIONAL    ,   -- Need OR
    ...
}

-- ASN1STOP
```


DAINGEAN_0002225

ReportConfigInterRAT field descriptions
availableAdmissionCapacityRequestWLAN The value true indicates that the UE shall include, if available, WLAN Available Admission Capacity in measurement reports.
backhaulDL-BandwidthRequestWLAN The value true indicates that the UE shall include, if available, WLAN Backhaul Downlink Bandwidth in measurement reports.
backhaulUL-BandwidthRequestWLAN The value true indicates that the UE shall include, if available, WLAN Backhaul Uplink Bandwidth in measurement reports.
bandRequestWLAN The value true indicates that the UE shall include WLAN band in measurement reports.
bN-ThresholdM Threshold to be used in inter RAT measurement report triggering condition for event number bN. If multiple thresholds are defined for event number bN, the thresholds are differentiated by M.
carrierInfoRequestWLAN The value true indicates that the UE shall include, if available, WLAN Carrier Information in measurement reports.
channelUtilizationRequest-WLAN The value true indicates that the UE shall include, if available, WLAN Channel Utilization in measurement reports.
eventId Choice of inter-RAT event triggered reporting criteria.
maxReportCells Max number of cells, excluding the serving cell, to include in the measurement report. In case *purpose* is set to *reportStrongestCellsForSON* only value 1 applies. For inter-RAT WLAN, it is the maximum number of WLANs to include in the measurement report.
Purpose reportStrongestCellsForSON applies only in case *reportConfig* is linked to a *measObject* set to *measObjectUTRA* or *measObjectCDMA2000*.
reportAmount Number of measurement reports applicable for *triggerType event* as well as for *triggerType periodical*. In case *purpose* is set to *reportCGI* or reportStrongestCellsForSON only value 1 applies.
reportQuantityUTRA-FDD The quantities to be included in the UTRA measurement report. The value *both* means that both the cpich RSCP and cpich EcN0 quantities are to be included in the measurement report.
si-RequestForHO The field applies to the *reportCGI* functionality, and when the field is included, the UE is allowed to use autonomous gaps in acquiring system information from the neighbour cell, applies a different value for T321, and includes different fields in the measurement report.
stationCountRequestWLAN The value true indicates that the UE shall include, if available, WLAN Station Count in measurement reports.
b1-ThresholdGERAN, b2-Threshold2GERAN The actual value is field value – 110 dBm.
b1-ThresholdUTRA, b2-Threshold2UTRA *utra-RSCP* corresponds to CPICH_RSCP in TS 25.133 [29] for FDD and P-CCPCH_RSCP in TS 25.123 [30] for TDD. *utra-EcN0* corresponds to CPICH_Ec/No in TS 25.133 [29] for FDD, and is not applicable for TDD. For *utra-RSCP*: The actual value is field value – 115 dBm. For *utra-EcN0*: The actual value is (field value – 49)/2 dB.
timeToTrigger Time during which specific criteria for the event needs to be met in order to trigger a measurement report.

Conditional presence	Explanation
reportCGI	The field is optional, need OR, in case *purpose* is included and set to *reportCGI*; otherwise the field is not present and the UE shall delete any existing value for this field.

– *ReportConfigToAddModList*

The IE *ReportConfigToAddModList* concerns a list of reporting configurations to add or modify

ReportConfigToAddModList information element

```
-- ASN1START

ReportConfigToAddModList ::=        SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod

ReportConfigToAddMod ::=    SEQUENCE {
```


DAINGEAN_0002226

```
    reportConfigId                  ReportConfigId,
    reportConfig                    CHOICE {
        reportConfigEUTRA               ReportConfigEUTRA,
        reportConfigInterRAT            ReportConfigInterRAT
    }
}


-- ASN1STOP
```

– *ReportInterval*

The *ReportInterval* indicates the interval between periodical reports. The *ReportInterval* is applicable if the UE performs periodical reporting (i.e. when *reportAmount* exceeds 1), for *triggerType event* as well as for *triggerType periodical*. Value ms120 corresponds with 120 ms, ms240 corresponds with 240 ms and so on, while value min1 corresponds with 1 min, min6 corresponds with 6 min and so on.

ReportInterval information element

```
-- ASN1START

ReportInterval ::=              ENUMERATED {
                                    ms120, ms240, ms480, ms640, ms1024, ms2048, ms5120, ms10240,
                                    min1, min6, min12, min30, min60, spare3, spare2, spare1}

-- ASN1STOP
```

– *RSRP-Range*

The IE *RSRP-Range* specifies the value range used in RSRP measurements and thresholds. Integer value for RSRP measurements according to mapping table in TS 36.133 [16].

RSRP-Range information element

```
-- ASN1START

RSRP-Range ::=                  INTEGER(0..97)

RSRP-RangeSL-r12 ::=            INTEGER(0..13)

RSRP-RangeSL2-r12 ::=           INTEGER(0..7)

RSRP-RangeSL3-r12 ::=           INTEGER(0..11)

RSRP-RangeSL4-r13 ::=           INTEGER(0..49)

-- ASN1STOP
```

RSRP-Range field descriptions
RSRP-RangeSL
Value 0 corresponds to -infinity, value 1 to -115dBm, value 2 to -110dBm, and so on (i.e. in steps of 5dBm) until value 12, which corresponds to -60dBm, while value 13 corresponds to +infinity.
RSRP-RangeSL2
Value 0 corresponds to -infinity, value 1 to -110dBm, value 2 to -100dBm, and so on (i.e. in steps of 10dBm) until value 6, which corresponds to -60dBm, while value 7 corresponds to +infinity.
RSRP-RangeSL3
Value 0 corresponds to -110dBm, value 1 to -105dBm, value 2 to -100dBm, and so on (i.e. in steps of 5dBm) until value 10, which corresponds to -60dBm, while value 11 corresponds to +infinity.
RSRP-RangeSL4
Indicates the range for SD-RSRP. Value 0 corresponds to -130dBm, value 1 to -128dBm, value 2 to -126dBm, and so on (i.e. in steps of 2dBm) until value 48, which corresponds to -34dBm, while value 49 corresponds to +infinity.

DAINGEAN_0002227

– *RSRQ-Range*

The IE *RSRQ-Range* specifies the value range used in RSRQ measurements and thresholds. Integer value for RSRQ measurements is according to mapping table in TS 36.133 [16]. A given field using *RSRQ-Range-v1250* shall only be signalled if the corresponding original field (using *RSRQ-Range* i.e. without suffix) is set to value 0 or 34. Only a UE indicating support of *extendedRSRQ-LowerRange-r12* or *rsrq-OnAllSymbols-r12* may report *RSRQ-Range-v1250*, and this may be done without explicit configuration from the E-UTRAN. If received, the UE shall use the value indicated by the *RSRQ-Range-v1250* and ignore the value signalled by *RSRQ-Range* (without the suffix). *RSRQ-Range-r13* covers the original range and extended *RSRQ-Range-v1250*. *RSRQ-Range-r13* may be signalled without the corresponding original field and without any requirements for indicated support of *extendedRSRQ-LowerRange-r12* or *rsrq-OnAllSymbols-r12*.

RSRQ-Range information element

```
-- ASN1START

RSRQ-Range ::=                      INTEGER(0..34)

RSRQ-Range-v1250 ::=                INTEGER(-30..46)

RSRQ-Range-r13 ::=                INTEGER(-30..46)

-- ASN1STOP
```

– *RSRQ-Type*

The IE *RSRQ-Type* specifies the RSRQ value type used in RSRQ measurements, see TS 36.214 [48].

RSRQ-Type information element

```
-- ASN1START

RSRQ-Type-r12 ::=                   SEQUENCE {
    allSymbols-r12                          BOOLEAN,
    wideBand-r12                            BOOLEAN
}

-- ASN1STOP
```

RSRQ-Type field descriptions
allSymbols
Value TRUE indicates use of all OFDM symbols when performing RSRQ measurements.
wideBand
Value TRUE indicates use of a wider bandwidth when performing RSRQ measurements.

– *RS-SINR-Range*

The IE *RS-SINR-Range* specifies the value range used in RS-SINR measurements and thresholds. Integer value for RS-SINR measurements is according to mapping table in TS 36.133 [16].

RS-SINR-Range information element

```
-- ASN1START

RS-SINR-Range-r13 ::=                   INTEGER(0..127)

-- ASN1STOP
```


DAINGEAN_0002228

– *RSSI-Range-r13*

The IE *RSSI-Range* specifies the value range used in RSSI measurements and thresholds. Integer value for RSSI measurements is according to mapping table in TS 36.133 [16].

RSSI-Range information element

```
-- ASN1START

RSSI-Range-r13 ::=                  INTEGER(0..76)

-- ASN1STOP
```

– *TimeToTrigger*

The IE *TimeToTrigger* specifies the value range used for time to trigger parameter, which concerns the time during which specific criteria for the event needs to be met in order to trigger a measurement report. Value ms0 corresponds to 0 ms, ms40 corresponds to 40 ms, and so on.

TimeToTrigger information element

```
-- ASN1START

TimeToTrigger ::=                   ENUMERATED {
                                        ms0, ms40, ms64, ms80, ms100, ms128, ms160, ms256,
                                        ms320, ms480, ms512, ms640, ms1024, ms1280, ms2560,
                                        ms5120}

-- ASN1STOP
```

– *UL-DelayConfig*

The IE *UL-DelayConfig* IE specifies the configuration of the UL PDCP Packet Delay per QCI measurement specified in TS36.314 [71].

UL-DelayConfig information element

```
-- ASN1START

UL-DelayConfig-r13 ::=              CHOICE {
        release                         NULL,
        setup                           SEQUENCE {
            delayThreshold-r13                  ENUMERATED {
                                                ms30, ms40, ms50, ms60, ms70, ms80,
                                                ms90,ms100, ms150, ms300, ms500, ms750, spare4,
                                            spare3, spare2, spare1}
        }
}

-- ASN1STOP
```

UL-DelayConfig field descriptions

delayThreshold
Indicates the delay threshold value used by UE to provide results of UL PDCP Packet Delay per QCI measurement as specified in TS 36.314 [71]. Value in milliseconds. Value ms30 means 30 ms and so on.

– *WLAN-CarrierInfo*

The IE *WLAN-CarrierInfo* is used to identify the WLAN frequency band information, as specified in Annex E in [67].

DAINGEAN_0002229

WLAN-CarrierInfo information element

```
-- ASN1START

WLAN-CarrierInfo-r13 ::=        SEQUENCE {
    operatingClass-r13      INTEGER (0..255)            OPTIONAL,   -- Need ON
    countryCode-r13         ENUMERATED {unitedStates, europe, japan, global, ...}   OPTIONAL,   --
Need ON
    channelNumbers-r13      WLAN-ChannelList-r13        OPTIONAL,   -- Need ON
    ...
}

WLAN-ChannelList-r13 ::=    SEQUENCE (SIZE (1..maxWLAN-Channels-r13)) OF WLAN-Channel-r13

WLAN-Channel-r13 ::=    INTEGER(0..255)

-- ASN1STOP
```

WLAN-CarrierInfo field descriptions
channelNumbers
Indicates the WLAN channels as defined in IEEE 802.11-2012 [67]. Value 0 is not used.
countryCode
Indicates the country code of WLAN as defined in IEEE 802.11-2012 [67].
operatingClass
Indicates the Operating Class of WLAN as defined in IEEE 802.11-2012 [67].

– *WLAN-RSSI-Range*

The IE *WLAN-RSSI-Range* specifies the value range used in WLAN RSSI measurements and thresholds. Integer value for WLAN RSSI measurements is according to mapping table in TS 36.133 [16]. Value 0 corresponds to -infinity, value 1 to -100dBm, value 2 to -99dBm, and so on (i.e. in steps of 1dBm) until value 140, which corresponds to 39dBm, while value 141 corresponds to +infinity.

WLAN-RSSI-Range information element

```
-- ASN1START

WLAN-RSSI-Range-r13 ::=                     INTEGER(0..141)

-- ASN1STOP
```

– *WLAN-Status*

The IE *WLAN-Status* indicates the current status of WLAN connection. The values are set as described in Sections 5.6.15.2 and 5.6.15.4.

WLAN-Status information element

```
-- ASN1START

WLAN-Status-r13 ::=     ENUMERATED {successfulAssociation, failureWlanRadioLink,
failureWlanUnavailable, failureTimeout}

-- ASN1STOP
```


DAINGEAN_0002230

6.3.6 Other information elements

– *AbsoluteTimeInfo*

The IE *AbsoluteTimeInfo* indicates an absolute time in a format YY-MM-DD HH:MM:SS and using BCD encoding. The first/ leftmost bit of the bit string contains the most significant bit of the most significant digit of the year and so on.

AbsoluteTimeInfo information element

```
-- ASN1START

AbsoluteTimeInfo-r10 ::=                BIT STRING (SIZE (48))

-- ASN1STOP
```

– *AreaConfiguration*

The *AreaConfiguration* indicates area for which UE is requested to perform measurement logging. If not configured, measurement logging is not restricted to specific cells or tracking areas but applies as long as the RPLMN is contained in *plmn-IdentityList* stored in *VarLogMeasReport*.

AreaConfiguration information element

```
-- ASN1START

AreaConfiguration-r10 ::=   CHOICE {
    cellGlobalIdList-r10            CellGlobalIdList-r10,
    trackingAreaCodeList-r10        TrackingAreaCodeList-r10
}

AreaConfiguration-v1130 ::=     SEQUENCE {
    trackingAreaCodeList-v1130      TrackingAreaCodeList-v1130
}

CellGlobalIdList-r10 ::=                SEQUENCE (SIZE (1..32)) OF CellGlobalIdEUTRA

TrackingAreaCodeList-r10 ::=            SEQUENCE (SIZE (1..8)) OF TrackingAreaCode

TrackingAreaCodeList-v1130 ::=  SEQUENCE {
    plmn-Identity-perTAC-List-r11           SEQUENCE (SIZE (1..8)) OF PLMN-Identity
}

-- ASN1STOP
```

***AreaConfiguration* field descriptions**
plmn-Identity-perTAC-List
Includes the PLMN identity for each of the TA codes included in *trackingAreaCodeList*. The PLMN identity listed first in *plmn-Identity-perTAC-List* corresponds with the TA code listed first in *trackingAreaCodeList* and so on.

– *C-RNTI*

The IE *C-RNTI* identifies a UE having a RRC connection within a cell.

C-RNTI information element

```
-- ASN1START

C-RNTI ::=                          BIT STRING (SIZE (16))

-- ASN1STOP
```


DAINGEAN_0002231

– *DedicatedInfoCDMA2000*

The *DedicatedInfoCDMA2000* is used to transfer UE specific CDMA2000 information between the network and the UE. The RRC layer is transparent for this information.

DedicatedInfoCDMA2000 information element

```
-- ASN1START

DedicatedInfoCDMA2000 ::=               OCTET STRING

-- ASN1STOP
```

– *DedicatedInfoNAS*

The IE *DedicatedInfoNAS* is used to transfer UE specific NAS layer information between the network and the UE. The RRC layer is transparent for this information.

DedicatedInfoNAS information element

```
-- ASN1START

DedicatedInfoNAS ::=        OCTET STRING

-- ASN1STOP
```

– *FilterCoefficient*

The IE *FilterCoefficient* specifies the measurement filtering coefficient. Value *fc0* corresponds to k = 0, *fc1* corresponds to k = 1, and so on.

FilterCoefficient information element

```
-- ASN1START

FilterCoefficient ::=                   ENUMERATED {
                                            fc0, fc1, fc2, fc3, fc4, fc5,
                                            fc6, fc7, fc8, fc9, fc11, fc13,
                                            fc15, fc17, fc19, spare1, ...}

-- ASN1STOP
```

– *LoggingDuration*

The *LoggingDuration* indicates the duration for which UE is requested to perform measurement logging. Value min10 corresponds to 10 minutes, value min20 corresponds to 20 minutes and so on.

LoggingDuration information element

```
-- ASN1START

LoggingDuration-r10 ::=         ENUMERATED {
                                    min10, min20, min40, min60, min90, min120, spare2, spare1}

-- ASN1STOP
```


DAINGEAN_0002232

– *LoggingInterval*

The *LoggingInterval* indicates the periodicity for logging measurement results. Value ms1280 corresponds to 1.28s, value ms2560 corresponds to 2.56s and so on.

LoggingInterval information element

```
-- ASN1START

LoggingInterval-r10 ::=          ENUMERATED {
                                     ms1280, ms2560, ms5120, ms10240, ms20480,
                                     ms30720, ms40960, ms61440}

-- ASN1STOP
```

– *MeasSubframePattern*

The IE *MeasSubframePattern* is used to specify a subframe pattern. The first/leftmost bit corresponds to the subframe #0 of the radio frame satisfying SFN mod x = 0, where SFN is that of PCell and x is the size of the bit string divided by 10. "1" denotes that the corresponding subframe is used.

MeasSubframePattern information element

```
-- ASN1START

MeasSubframePattern-r10 ::= CHOICE {
    subframePatternFDD-r10              BIT STRING (SIZE (40)),
    subframePatternTDD-r10              CHOICE {
        subframeConfig1-5-r10                   BIT STRING (SIZE (20)),
        subframeConfig0-r10                     BIT STRING (SIZE (70)),
        subframeConfig6-r10                     BIT STRING (SIZE (60)),
        ...
    },
    ...
}

-- ASN1STOP
```

– *MMEC*

The IE *MMEC* identifies an MME within the scope of an MME Group within a PLMN, see TS 23.003 [27].

MMEC information element

```
-- ASN1START

MMEC ::=                            BIT STRING (SIZE (8))

-- ASN1STOP
```

– *NeighCellConfig*

The IE *NeighCellConfig* is used to provide the information related to MBSFN and TDD UL/DL configuration of neighbour cells.

NeighCellConfig information element

```
-- ASN1START

NeighCellConfig ::=          BIT STRING (SIZE (2))

-- ASN1STOP
```


DAINGEAN_0002233

***NeighCellConfig* field descriptions**
neighCellConfig
Provides information related to MBSFN and TDD UL/DL configuration of neighbour cells of this frequency 00: Not all neighbour cells have the same MBSFN subframe allocation as the serving cell on this frequency, if configured, and as the PCell otherwise 10: The MBSFN subframe allocations of all neighbour cells are identical to or subsets of that in the serving cell on this frequency, if configured, and of that in the PCell otherwise 01: No MBSFN subframes are present in all neighbour cells 11: Different UL/DL allocation in neighbouring cells for TDD compared to the serving cell on this frequency, if configured, and compared to the PCell otherwise For TDD, 00, 10 and 01 are only used for same UL/DL allocation in neighbouring cells compared to the serving cell on this frequency, if configured, and compared to the PCell otherwise.

– *OtherConfig*

The IE *OtherConfig* contains configuration related to other configuration

***OtherConfig* information element**

```
-- ASN1START

OtherConfig-r9 ::= SEQUENCE {
    reportProximityConfig-r9            ReportProximityConfig-r9        OPTIONAL,   -- Need ON
    ...,
    [[  idc-Config-r11                  IDC-Config-r11                  OPTIONAL,   -- Need ON
        powerPrefIndicationConfig-r11   PowerPrefIndicationConfig-r11   OPTIONAL,   -- Need ON
        obtainLocationConfig-r11        ObtainLocationConfig-r11        OPTIONAL    -- Need ON
    ]]
}

IDC-Config-r11 ::=              SEQUENCE {
    idc-Indication-r11              ENUMERATED {setup}      OPTIONAL,       -- Need OR
    autonomousDenialParameters-r11  SEQUENCE {
            autonomousDenialSubframes-r11           ENUMERATED {n2, n5, n10, n15,
                                                        n20, n30, spare2, spare1},
            autonomousDenialValidity-r11            ENUMERATED {
                                                        sf200, sf500, sf1000, sf2000,
                                                        spare4, spare3, spare2, spare1}
    }       OPTIONAL,       -- Need OR
    ...,
    [[  idc-Indication-UL-CA-r11        ENUMERATED {setup}      OPTIONAL        -- Cond idc-Ind
    ]]
}

ObtainLocationConfig-r11 ::= SEQUENCE {
    obtainLocation-r11              ENUMERATED {setup}              OPTIONAL        -- Need OR
}

PowerPrefIndicationConfig-r11 ::= CHOICE{
    release                 NULL,
    setup                   SEQUENCE{
        powerPrefIndicationTimer-r11        ENUMERATED {s0, s0dot5, s1, s2, s5, s10, s20,
                                            s30, s60, s90, s120, s300, s600, spare3,
                                            spare2, spare1}
    }
}

ReportProximityConfig-r9 ::= SEQUENCE {
    proximityIndicationEUTRA-r9     ENUMERATED {enabled}            OPTIONAL,       -- Need OR
    proximityIndicationUTRA-r9      ENUMERATED {enabled}            OPTIONAL        -- Need OR
}

-- ASN1STOP
```


DAINGEAN_0002234

OtherConfig field descriptions
autonomousDenialSubframes Indicates the maximum number of the UL subframes for which the UE is allowed to deny any UL transmission. Value n2 corresponds to 2 subframes, n5 to 5 subframes and so on. E-UTRAN does not configure autonomous denial for frequencies on which SCG cells are configured.
autonomousDenialValidity Indicates the validity period over which the UL autonomous denial subframes shall be counted. Value sf200 corresponds to 200 subframes, sf500 corresponds to 500 subframes and so on.
idc-Indication The field is used to indicate whether the UE is configured to initiate transmission of the *InDeviceCoexIndication* message to the network.
idc-Indication-UL-CA The field is used to indicate whether the UE is configured to provide IDC indications for UL CA using the *InDeviceCoexIndication* message.
obtainLocation Requests the UE to attempt to have detailed location information available using GNSS. E-UTRAN configures the field only if *includeLocationInfo* is configured for one or more measurements.
powerPrefIndicationTimer Prohibit timer for Power Preference Indication reporting. Value in seconds. Value s0 means prohibit timer is set to 0 second or not set, value s0dot5 means prohibit timer is set to 0.5 second, value s1 means prohibit timer is set to 1 second and so on.
reportProximityConfig Indicates, for each of the applicable RATs (EUTRA, UTRA), whether or not proximity indication is enabled for CSG member cell(s) of the concerned RAT. Note.

NOTE: Enabling/ disabling of proximity indication includes enabling/ disabling of the related functionality e.g. autonomous search in connected mode.

Conditional presence	Explanation
idc-Ind	The field is optionally present if *idc-Indication* is present, need OR. Otherwise the field is not present.

– *RAND-CDMA2000 (1xRTT)*

The *RAND-CDMA2000* concerns a random value, generated by the eNB, to be passed to the CDMA2000 upper layers.

RAND-CDMA2000 information element

```
-- ASN1START

RAND-CDMA2000 ::=                   BIT STRING (SIZE (32))

-- ASN1STOP
```

– *RAT-Type*

The IE *RAT-Type* is used to indicate the radio access technology (RAT), including E-UTRA, of the requested/ transferred UE capabilities.

RAT-Type information element

```
-- ASN1START

RAT-Type ::=                        ENUMERATED {
                                        eutra, utra, geran-cs, geran-ps, cdma2000-1XRTT,
                                        spare3, spare2, spare1, ...}

-- ASN1STOP
```

– *ResumeIdentity*

The IE *ResumeIdentity* is used to identify the suspended UE context

DAINGEAN_0002235

ResumeIdentity information element

```
-- ASN1START

ResumeIdentity-r13 ::=                  BIT STRING (SIZE(40))

-- ASN1STOP
```

– RRC-TransactionIdentifier

The IE *RRC-TransactionIdentifier* is used, together with the message type, for the identification of an RRC procedure (transaction).

RRC-TransactionIdentifier information element

```
-- ASN1START

RRC-TransactionIdentifier ::=       INTEGER (0..3)

-- ASN1STOP
```

– S-TMSI

The IE *S-TMSI* contains an S-Temporary Mobile Subscriber Identity, a temporary UE identity provided by the EPC which uniquely identifies the UE within the tracking area, see TS 23.003 [27].

S-TMSI information element

```
-- ASN1START

S-TMSI ::=                          SEQUENCE {
    mmec                                MMEC,
    m-TMSI                              BIT STRING (SIZE (32))
}

-- ASN1STOP
```

S-TMSI field descriptions

m-TMSI
The first/leftmost bit of the bit string contains the most significant bit of the M-TMSI.

– TraceReference

The *TraceReference* contains parameter Trace Reference as defined in TS 32.422 [58].

TraceReference information element

```
-- ASN1START

TraceReference-r10 ::=          SEQUENCE {
    plmn-Identity-r10               PLMN-Identity,
    traceId-r10                     OCTET STRING (SIZE (3))
}

-- ASN1STOP
```

– UE-CapabilityRAT-ContainerList

The IE *UE-CapabilityRAT-ContainerList* contains list of containers, one for each RAT for which UE capabilities are transferred, if any.

DAINGEAN_0002236

UE-CapabilityRAT-ContainerList information element

```
-- ASN1START

UE-CapabilityRAT-ContainerList ::=SEQUENCE (SIZE (0..maxRAT-Capabilities)) OF UE-CapabilityRAT-
Container

UE-CapabilityRAT-Container ::= SEQUENCE {
    rat-Type                          RAT-Type,
    ueCapabilityRAT-Container         OCTET STRING
}

-- ASN1STOP
```

***UECapabilityRAT-ContainerList* field descriptions**

ueCapabilityRAT-Container
Container for the UE capabilities of the indicated RAT. The encoding is defined in the specification of each RAT:
For E-UTRA: the encoding of UE capabilities is defined in IE *UE-EUTRA-Capability*.
For UTRA: the octet string contains the INTER RAT HANDOVER INFO message defined in TS 25.331 [19].
For GERAN CS: the octet string contains the concatenated string of the Mobile Station Classmark 2 and Mobile Station Classmark 3. The first 5 octets correspond to Mobile Station Classmark 2 and the following octets correspond to Mobile Station Classmark 3. The Mobile Station Classmark 2 is formatted as 'TLV' and is coded in the same way as the *Mobile Station Classmark 2* information element in TS 24.008 [49]. The first octet is the *Mobile station classmark 2 IEI* and its value shall be set to 33H. The second octet is the *Length of mobile station classmark 2* and its value shall be set to 3. The octet 3 contains the first octet of the value part of the *Mobile Station Classmark 2* information element, the octet 4 contains the second octet of the value part of the *Mobile Station Classmark 2* information element and so on. For each of these octets, the first/ leftmost/ most significant bit of the octet contains b8 of the corresponding octet of the Mobile Station Classmark 2. The Mobile Station Classmark 3 is formatted as 'V' and is coded in the same way as the value part in the *Mobile station classmark 3* information element in TS 24.008 [49]. The sixth octet of this octet string contains octet 1 of the value part of *Mobile station classmark 3*, the seventh of octet of this octet string contains octet 2 of the value part of *Mobile station classmark 3* and so on. Note.
For GERAN PS: the encoding of UE capabilities is formatted as 'V' and is coded in the same way as the value part in the *MS Radio Access Capability* information element in TS 24.008 [49].
For CDMA2000-1XRTT: the octet string contains the A21 Mobile Subscription Information and the encoding of this is defined in A.S0008 [33]. The A21 Mobile Subscription Information contains the supported CDMA2000 1xRTT band class and band sub-class information.

NOTE: The value part is specified by means of CSN.1, which encoding results in a bit string, to which final padding may be appended up to the next octet boundary TS 24.008 [49]. The first/ leftmost bit of the CSN.1 bit string is placed in the first/ leftmost/ most significant bit of the first octet. This continues until the last bit of the CSN.1 bit string, which is placed in the last/ rightmost/ least significant bit of the last octet.

– *UE-EUTRA-Capability*

The IE *UE-EUTRA-Capability* is used to convey the E-UTRA UE Radio Access Capability Parameters, see TS 36.306 [5], and the Feature Group Indicators for mandatory features (defined in Annexes B.1 and C.1) to the network. The IE *UE-EUTRA-Capability* is transferred in E-UTRA or in another RAT.

NOTE 0: For (UE capability specific) guidelines on the use of keyword OPTIONAL, see Annex A.3.5.

UE-EUTRA-Capability information element

```
-- ASN1START

UE-EUTRA-Capability ::=          SEQUENCE {
    accessStratumRelease                AccessStratumRelease,
    ue-Category                         INTEGER (1..5),
    pdcp-Parameters                     PDCP-Parameters,
    phyLayerParameters                  PhyLayerParameters,
    rf-Parameters                       RF-Parameters,
    measParameters                      MeasParameters,
    featureGroupIndicators              BIT STRING (SIZE (32))              OPTIONAL,
    interRAT-Parameters               SEQUENCE {
        utraFDD                             IRAT-ParametersUTRA-FDD             OPTIONAL,
        utraTDD128                          IRAT-ParametersUTRA-TDD128              OPTIONAL,
        utraTDD384                          IRAT-ParametersUTRA-TDD384              OPTIONAL,
        utraTDD768                          IRAT-ParametersUTRA-TDD768              OPTIONAL,
        geran                               IRAT-ParametersGERAN                    OPTIONAL,
        cdma2000-HRPD                       IRAT-ParametersCDMA2000-HRPD            OPTIONAL,
```


DAINGEAN_0002237

```
        cdma2000-1xRTT                  IRAT-ParametersCDMA2000-1XRTT           OPTIONAL
    },
    nonCriticalExtension                UE-EUTRA-Capability-v920-IEs        OPTIONAL
}

-- Late non critical extensions
UE-EUTRA-Capability-v9a0-IEs ::=    SEQUENCE {
    featureGroupIndRel9Add-r9           BIT STRING (SIZE (32))              OPTIONAL,
    fdd-Add-UE-EUTRA-Capabilities-r9    UE-EUTRA-CapabilityAddXDD-Mode-r9   OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-r9    UE-EUTRA-CapabilityAddXDD-Mode-r9   OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v9c0-IEs        OPTIONAL
}

UE-EUTRA-Capability-v9c0-IEs ::=        SEQUENCE {
    interRAT-ParametersUTRA-v9c0        IRAT-ParametersUTRA-v9c0        OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v9d0-IEs    OPTIONAL
}

UE-EUTRA-Capability-v9d0-IEs ::=        SEQUENCE {
    phyLayerParameters-v9d0             PhyLayerParameters-v9d0         OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v9e0-IEs    OPTIONAL
}

UE-EUTRA-Capability-v9e0-IEs ::=    SEQUENCE {
    rf-Parameters-v9e0                  RF-Parameters-v9e0                  OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v9h0-IEs        OPTIONAL
}

UE-EUTRA-Capability-v9h0-IEs ::=    SEQUENCE {
    interRAT-ParametersUTRA-v9h0        IRAT-ParametersUTRA-v9h0        OPTIONAL,
    -- Following field is only to be used for late REL-9 extensions
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v10c0-IEs       OPTIONAL
}

UE-EUTRA-Capability-v10c0-IEs ::=   SEQUENCE {
    otdoa-PositioningCapabilities-r10   OTDOA-PositioningCapabilities-r10   OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v10f0-IEs       OPTIONAL
}

UE-EUTRA-Capability-v10f0-IEs ::=   SEQUENCE {
    rf-Parameters-v10f0                 RF-Parameters-v10f0                 OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v10i0-IEs       OPTIONAL
}

UE-EUTRA-Capability-v10i0-IEs ::=   SEQUENCE {
    rf-Parameters-v10i0                 RF-Parameters-v10i0                 OPTIONAL,
    -- Following field is only to be used for late REL-10 extensions
    lateNonCriticalExtension            OCTET STRING (CONTAINING UE-EUTRA-Capability-v10j0-IEs)
    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v11d0-IEs       OPTIONAL
}

UE-EUTRA-Capability-v10j0-IEs ::=   SEQUENCE {
    rf-Parameters-v10j0                 RF-Parameters-v10j0                 OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

UE-EUTRA-Capability-v11d0-IEs ::=   SEQUENCE {
    rf-Parameters-v11d0                 RF-Parameters-v11d0                 OPTIONAL,
    otherParameters-v11d0               Other-Parameters-v11d0              OPTIONAL,
    -- Following field is only to be used for late REL-11 extensions
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- Regular non critical extensions
UE-EUTRA-Capability-v920-IEs ::=        SEQUENCE {
    phyLayerParameters-v920             PhyLayerParameters-v920,
    interRAT-ParametersGERAN-v920           IRAT-ParametersGERAN-v920,
    interRAT-ParametersUTRA-v920            IRAT-ParametersUTRA-v920            OPTIONAL,
    interRAT-ParametersCDMA2000-v920        IRAT-ParametersCDMA2000-1XRTT-v920  OPTIONAL,
    deviceType-r9                           ENUMERATED {noBenFromBatConsumpOpt} OPTIONAL,
    csg-ProximityIndicationParameters-r9    CSG-ProximityIndicationParameters-r9,
    neighCellSI-AcquisitionParameters-r9    NeighCellSI-AcquisitionParameters-r9,
    son-Parameters-r9                       SON-Parameters-r9,
    nonCriticalExtension                    UE-EUTRA-Capability-v940-IEs        OPTIONAL
}
```


DAINGEAN_0002238

```
UE-EUTRA-Capability-v940-IEs ::=    SEQUENCE {
    lateNonCriticalExtension            OCTET STRING (CONTAINING UE-EUTRA-Capability-v9a0-IEs)
                                                                        OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1020-IEs   OPTIONAL
}

UE-EUTRA-Capability-v1020-IEs ::=   SEQUENCE {
    ue-Category-v1020                   INTEGER (6..8)                      OPTIONAL,
    phyLayerParameters-v1020            PhyLayerParameters-v1020            OPTIONAL,
    rf-Parameters-v1020                 RF-Parameters-v1020                 OPTIONAL,
    measParameters-v1020                MeasParameters-v1020                OPTIONAL,
    featureGroupIndRel10-r10            BIT STRING (SIZE (32))              OPTIONAL,
    interRAT-ParametersCDMA2000-v1020   IRAT-ParametersCDMA2000-1XRTT-v1020 OPTIONAL,
    ue-BasedNetwPerfMeasParameters-r10  UE-BasedNetwPerfMeasParameters-r10  OPTIONAL,
    interRAT-ParametersUTRA-TDD-v1020   IRAT-ParametersUTRA-TDD-v1020       OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1060-IEs       OPTIONAL
}

UE-EUTRA-Capability-v1060-IEs ::=   SEQUENCE {
    fdd-Add-UE-EUTRA-Capabilities-v1060 UE-EUTRA-CapabilityAddXDD-Mode-v1060    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1060 UE-EUTRA-CapabilityAddXDD-Mode-v1060    OPTIONAL,
    rf-Parameters-v1060                 RF-Parameters-v1060                     OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1090-IEs           OPTIONAL
}

UE-EUTRA-Capability-v1090-IEs ::=   SEQUENCE {
    rf-Parameters-v1090                 RF-Parameters-v1090                     OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1130-IEs           OPTIONAL
}

UE-EUTRA-Capability-v1130-IEs ::=   SEQUENCE {
    pdcp-Parameters-v1130               PDCP-Parameters-v1130,
    phyLayerParameters-v1130            PhyLayerParameters-v1130                OPTIONAL,
    rf-Parameters-v1130                 RF-Parameters-v1130,
    measParameters-v1130                MeasParameters-v1130,
    interRAT-ParametersCDMA2000-v1130   IRAT-ParametersCDMA2000-v1130,
    otherParameters-r11                 Other-Parameters-r11,
    fdd-Add-UE-EUTRA-Capabilities-v1130 UE-EUTRA-CapabilityAddXDD-Mode-v1130    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1130 UE-EUTRA-CapabilityAddXDD-Mode-v1130    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1170-IEs           OPTIONAL
}

UE-EUTRA-Capability-v1170-IEs ::=   SEQUENCE {
    phyLayerParameters-v1170            PhyLayerParameters-v1170                OPTIONAL,
    ue-Category-v1170                   INTEGER (9..10)                         OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1180-IEs           OPTIONAL
}

UE-EUTRA-Capability-v1180-IEs ::=   SEQUENCE {
    rf-Parameters-v1180                 RF-Parameters-v1180                     OPTIONAL,
    mbms-Parameters-r11                 MBMS-Parameters-r11                     OPTIONAL,
    fdd-Add-UE-EUTRA-Capabilities-v1180 UE-EUTRA-CapabilityAddXDD-Mode-v1180    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1180 UE-EUTRA-CapabilityAddXDD-Mode-v1180    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v11a0-IEs           OPTIONAL
}

UE-EUTRA-Capability-v11a0-IEs ::=   SEQUENCE {
    ue-Category-v11a0                   INTEGER (11..12)                        OPTIONAL,
    measParameters-v11a0                MeasParameters-v11a0                    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1250-IEs           OPTIONAL
}

UE-EUTRA-Capability-v1250-IEs ::=   SEQUENCE {
    phyLayerParameters-v1250            PhyLayerParameters-v1250                OPTIONAL,
    rf-Parameters-v1250                 RF-Parameters-v1250                     OPTIONAL,
    rlc-Parameters-r12                  RLC-Parameters-r12                      OPTIONAL,
    ue-BasedNetwPerfMeasParameters-v1250    UE-BasedNetwPerfMeasParameters-v1250    OPTIONAL,
    ue-CategoryDL-r12                   INTEGER (0..14)                         OPTIONAL,
    ue-CategoryUL-r12                   INTEGER (0..13)                         OPTIONAL,
    wlan-IW-Parameters-r12              WLAN-IW-Parameters-r12                  OPTIONAL,
    measParameters-v1250                MeasParameters-v1250                    OPTIONAL,
    dc-Parameters-r12                   DC-Parameters-r12                       OPTIONAL,
    mbms-Parameters-v1250               MBMS-Parameters-v1250                   OPTIONAL,
    mac-Parameters-r12                  MAC-Parameters-r12                      OPTIONAL,
    fdd-Add-UE-EUTRA-Capabilities-v1250 UE-EUTRA-CapabilityAddXDD-Mode-v1250    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1250 UE-EUTRA-CapabilityAddXDD-Mode-v1250    OPTIONAL,
    sl-Parameters-r12                   SL-Parameters-r12                   OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1260-IEs           OPTIONAL
```


DAINGEAN_0002239

```
}

UE-EUTRA-Capability-v1260-IEs ::=   SEQUENCE {
    ue-CategoryDL-v1260                 INTEGER (15..16)                            OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1270-IEs               OPTIONAL
}

UE-EUTRA-Capability-v1270-IEs ::= SEQUENCE {
    rf-Parameters-v1270                 RF-Parameters-v1270                         OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1280-IEs               OPTIONAL
}

UE-EUTRA-Capability-v1280-IEs ::= SEQUENCE {
    phyLayerParameters-v1280            PhyLayerParameters-v1280                    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1310-IEs               OPTIONAL
}

UE-EUTRA-Capability-v1310-IEs ::= SEQUENCE {
    ue-CategoryDL-v1310               ENUMERATED {n17, m1}                      OPTIONAL,
    ue-CategoryUL-v1310               ENUMERATED {n14, m1}                      OPTIONAL,
    pdcp-Parameters-v1310               PDCP-Parameters-v1310,
    rlc-Parameters-v1310                RLC-Parameters-v1310,
    mac-Parameters-v1310                MAC-Parameters-v1310                        OPTIONAL,
    phyLayerParameters-v1310            PhyLayerParameters-v1310                    OPTIONAL,
    rf-Parameters-v1310                 RF-Parameters-v1310                         OPTIONAL,
    measParameters-v1310                MeasParameters-v1310                        OPTIONAL,
    dc-Parameters-v1310                 DC-Parameters-v1310                         OPTIONAL,
    sl-Parameters-v1310                 SL-Parameters-v1310                         OPTIONAL,
    scptm-Parameters-r13                SCPTM-Parameters-r13                        OPTIONAL,
    ce-Parameters-r13                   CE-Parameters-r13                           OPTIONAL,
    interRAT-ParametersWLAN-r13         IRAT-ParametersWLAN-r13,
    laa-Parameters-r13                  LAA-Parameters-r13                          OPTIONAL,
    lwa-Parameters-r13                  LWA-Parameters-r13                          OPTIONAL,
    wlan-IW-Parameters-v1310                WLAN-IW-Parameters-v1310,
    lwip-Parameters-r13                 LWIP-Parameters-r13,
    fdd-Add-UE-EUTRA-Capabilities-v1310 UE-EUTRA-CapabilityAddXDD-Mode-v1310    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1310 UE-EUTRA-CapabilityAddXDD-Mode-v1310    OPTIONAL,
    nonCriticalExtension                UE-EUTRA-Capability-v1320-IEs               OPTIONAL
}

UE-EUTRA-Capability-v1320-IEs ::= SEQUENCE {
    ce-Parameters-v1320                 CE-Parameters-v1320                         OPTIONAL,
    phyLayerParameters-v1320            PhyLayerParameters-v1320                    OPTIONAL,
    rf-Parameters-v1320                 RF-Parameters-v1320                         OPTIONAL,
    fdd-Add-UE-EUTRA-Capabilities-v1320 UE-EUTRA-CapabilityAddXDD-Mode-v1320    OPTIONAL,
    tdd-Add-UE-EUTRA-Capabilities-v1320 UE-EUTRA-CapabilityAddXDD-Mode-v1320    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                                 OPTIONAL
}

UE-EUTRA-CapabilityAddXDD-Mode-r9 ::=   SEQUENCE {
    phyLayerParameters-r9               PhyLayerParameters                      OPTIONAL,
    featureGroupIndicators-r9           BIT STRING (SIZE (32))                  OPTIONAL,
    featureGroupIndRel9Add-r9           BIT STRING (SIZE (32))                  OPTIONAL,
    interRAT-ParametersGERAN-r9         IRAT-ParametersGERAN                    OPTIONAL,
    interRAT-ParametersUTRA-r9          IRAT-ParametersUTRA-v920                OPTIONAL,
    interRAT-ParametersCDMA2000-r9      IRAT-ParametersCDMA2000-1XRTT-v920      OPTIONAL,
    neighCellSI-AcquisitionParameters-r9    NeighCellSI-AcquisitionParameters-r9    OPTIONAL,
    ...
}

UE-EUTRA-CapabilityAddXDD-Mode-v1060 ::=    SEQUENCE {
    phyLayerParameters-v1060            PhyLayerParameters-v1020                OPTIONAL,
    featureGroupIndRel10-v1060          BIT STRING (SIZE (32))                  OPTIONAL,
    interRAT-ParametersCDMA2000-v1060   IRAT-ParametersCDMA2000-1XRTT-v1020     OPTIONAL,
    interRAT-ParametersUTRA-TDD-v1060   IRAT-ParametersUTRA-TDD-v1020           OPTIONAL,
    ...,
    [[  otdoa-PositioningCapabilities-r10   OTDOA-PositioningCapabilities-r10   OPTIONAL
    ]]
}

UE-EUTRA-CapabilityAddXDD-Mode-v1130 ::=    SEQUENCE {
    phyLayerParameters-v1130            PhyLayerParameters-v1130                OPTIONAL,
    measParameters-v1130                MeasParameters-v1130                    OPTIONAL,
    otherParameters-r11                 Other-Parameters-r11                    OPTIONAL,
    ...
}

UE-EUTRA-CapabilityAddXDD-Mode-v1180 ::=    SEQUENCE {
```


DAINGEAN_0002240

```
    mbms-Parameters-r11                 MBMS-Parameters-r11
}

UE-EUTRA-CapabilityAddXDD-Mode-v1250 ::=    SEQUENCE {
    phyLayerParameters-v1250            PhyLayerParameters-v1250            OPTIONAL,
    measParameters-v1250                MeasParameters-v1250                OPTIONAL
}

UE-EUTRA-CapabilityAddXDD-Mode-v1310 ::=    SEQUENCE {
    phyLayerParameters-v1310            PhyLayerParameters-v1310            OPTIONAL
}

UE-EUTRA-CapabilityAddXDD-Mode-v1320 ::=    SEQUENCE {
    phyLayerParameters-v1320            PhyLayerParameters-v1320            OPTIONAL,
    scptm-Parameters-r13                SCPTM-Parameters-r13                OPTIONAL
}

AccessStratumRelease ::=            ENUMERATED {
                                        rel8, rel9, rel10, rel11, rel12, rel13,
                                        spare2, spare1, ...}

DC-Parameters-r12 ::=           SEQUENCE {
    drb-TypeSplit-r12                   ENUMERATED {supported}          OPTIONAL,
    drb-TypeSCG-r12                     ENUMERATED {supported}          OPTIONAL
}

DC-Parameters-v1310 ::=         SEQUENCE {
    pdcp-TransferSplitUL-r13            ENUMERATED {supported}          OPTIONAL,
    ue-SSTD-Meas-r13                    ENUMERATED {supported}          OPTIONAL
}

MAC-Parameters-r12 ::=              SEQUENCE {
    logicalChannelSR-ProhibitTimer-r12  ENUMERATED {supported}          OPTIONAL,
    longDRX-Command-r12             ENUMERATED {supported}              OPTIONAL
}

MAC-Parameters-v1310 ::=                SEQUENCE {
    extendedMAC-LengthField-r13     ENUMERATED {supported}              OPTIONAL,
    extendedLongDRX-r13             ENUMERATED {supported}              OPTIONAL
}

RLC-Parameters-r12 ::=              SEQUENCE {
    extended-RLC-LI-Field-r12           ENUMERATED {supported}
}

RLC-Parameters-v1310 ::=                SEQUENCE {
    extendedRLC-SN-SO-Field-r13             ENUMERATED {supported}          OPTIONAL
}

PDCP-Parameters ::=             SEQUENCE {
    supportedROHC-Profiles              SEQUENCE {
        profile0x0001                       BOOLEAN,
        profile0x0002                       BOOLEAN,
        profile0x0003                       BOOLEAN,
        profile0x0004                       BOOLEAN,
        profile0x0006                       BOOLEAN,
        profile0x0101                       BOOLEAN,
        profile0x0102                       BOOLEAN,
        profile0x0103                       BOOLEAN,
        profile0x0104                       BOOLEAN
    },
    maxNumberROHC-ContextSessions       ENUMERATED {
                                            cs2, cs4, cs8, cs12, cs16, cs24, cs32,
                                            cs48, cs64, cs128, cs256, cs512, cs1024,
                                            cs16384, spare2, spare1}                DEFAULT cs16,
    ...
}

PDCP-Parameters-v1130 ::=       SEQUENCE {
    pdcp-SN-Extension-r11               ENUMERATED {supported}          OPTIONAL,
    supportRohcContextContinue-r11      ENUMERATED {supported}          OPTIONAL
}

PDCP-Parameters-v1310 ::=               SEQUENCE {
    pdcp-SN-Extension-18bits-r13            ENUMERATED {supported}  OPTIONAL
}

PhyLayerParameters ::=              SEQUENCE {
```


DAINGEAN_0002241

```
    ue-TxAntennaSelectionSupported      BOOLEAN,
    ue-SpecificRefSigsSupported     BOOLEAN
}

PhyLayerParameters-v920 ::=     SEQUENCE {
    enhancedDualLayerFDD-r9         ENUMERATED {supported}          OPTIONAL,
    enhancedDualLayerTDD-r9         ENUMERATED {supported}          OPTIONAL
}

PhyLayerParameters-v9d0 ::=         SEQUENCE {
    tm5-FDD-r9                      ENUMERATED {supported}          OPTIONAL,
    tm5-TDD-r9                      ENUMERATED {supported}          OPTIONAL
}

PhyLayerParameters-v1020 ::=            SEQUENCE {
    twoAntennaPortsForPUCCH-r10             ENUMERATED {supported}                  OPTIONAL,
    tm9-With-8Tx-FDD-r10                    ENUMERATED {supported}                  OPTIONAL,
    pmi-Disabling-r10                       ENUMERATED {supported}                  OPTIONAL,
    crossCarrierScheduling-r10              ENUMERATED {supported}                  OPTIONAL,
    simultaneousPUCCH-PUSCH-r10             ENUMERATED {supported}                  OPTIONAL,
    multiClusterPUSCH-WithinCC-r10          ENUMERATED {supported}                  OPTIONAL,
    nonContiguousUL-RA-WithinCC-List-r10    NonContiguousUL-RA-WithinCC-List-r10    OPTIONAL
}

PhyLayerParameters-v1130 ::=            SEQUENCE {
    crs-InterfHandl-r11                     ENUMERATED {supported}                  OPTIONAL,
    ePDCCH-r11                              ENUMERATED {supported}                  OPTIONAL,
    multiACK-CSI-Reporting-r11              ENUMERATED {supported}                  OPTIONAL,
    ss-CCH-InterfHandl-r11                  ENUMERATED {supported}                  OPTIONAL,
    tdd-SpecialSubframe-r11                 ENUMERATED {supported}                  OPTIONAL,
    txDiv-PUCCH1b-ChSelect-r11              ENUMERATED {supported}                  OPTIONAL,
    ul-CoMP-r11                             ENUMERATED {supported}                  OPTIONAL
}

PhyLayerParameters-v1170 ::=            SEQUENCE {
    interBandTDD-CA-WithDifferentConfig-r11 BIT STRING (SIZE (2))           OPTIONAL
}

PhyLayerParameters-v1250 ::=            SEQUENCE {
    e-HARQ-Pattern-FDD-r12                  ENUMERATED {supported}          OPTIONAL,
    enhanced-4TxCodebook-r12                ENUMERATED {supported}          OPTIONAL,
    tdd-FDD-CA-PCellDuplex-r12              BIT STRING (SIZE (2))           OPTIONAL,
    phy-TDD-ReConfig-TDD-PCell-r12          ENUMERATED {supported}          OPTIONAL,
    phy-TDD-ReConfig-FDD-PCell-r12          ENUMERATED {supported}          OPTIONAL,
    pusch-FeedbackMode-r12                  ENUMERATED {supported}          OPTIONAL,
    pusch-SRS-PowerControl-SubframeSet-r12  ENUMERATED {supported}          OPTIONAL,
    csi-SubframeSet-r12                     ENUMERATED {supported}          OPTIONAL,
    noResourceRestrictionForTTIBundling-r12 ENUMERATED {supported}          OPTIONAL,
    discoverySignalsInDeactSCell-r12        ENUMERATED {supported}          OPTIONAL,
    naics-Capability-List-r12               NAICS-Capability-List-r12       OPTIONAL
}

PhyLayerParameters-v1280 ::=            SEQUENCE {
    alternativeTBS-Indices-r12              ENUMERATED {supported}          OPTIONAL
}

PhyLayerParameters-v1310 ::=            SEQUENCE {
    aperiodicCSI-Reporting-r13              BIT STRING (SIZE (2))           OPTIONAL,
    codebook-HARQ-ACK-r13                   BIT STRING (SIZE (2))           OPTIONAL,
    crossCarrierScheduling-B5C-r13          ENUMERATED {supported}          OPTIONAL,
    fdd-HARQ-TimingTDD-r13                  ENUMERATED {supported}          OPTIONAL,
    maxNumberUpdatedCSI-Proc-r13            INTEGER(5..32)                  OPTIONAL,
    pucch-Format4-r13                       ENUMERATED {supported}          OPTIONAL,
    pucch-Format5-r13                       ENUMERATED {supported}          OPTIONAL,
    pucch-SCell-r13                         ENUMERATED {supported}          OPTIONAL,
    spatialBundling-HARQ-ACK-r13            ENUMERATED {supported}          OPTIONAL,
    supportedBlindDecoding-r13              SEQUENCE {
        maxNumberDecoding-r13                   INTEGER(1..32)                  OPTIONAL,
        pdcch-CandidateReductions-r13           ENUMERATED {supported}          OPTIONAL,
        skipMonitoringDCI-Format0-1A-r13        ENUMERATED {supported}          OPTIONAL
    }                                                                           OPTIONAL,
    uci-PUSCH-Ext-r13                       ENUMERATED {supported}          OPTIONAL,
    crs-InterfMitigationTM10-r13            ENUMERATED {supported}          OPTIONAL,
    pdsch-CollisionHandling-r13             ENUMERATED {supported}          OPTIONAL
}

PhyLayerParameters-v1320 ::=            SEQUENCE {
    mimo-UE-Parameters-r13                  MIMO-UE-Parameters-r13          OPTIONAL
```


DAINGEAN_0002242

```
}

MIMO-UE-Parameters-r13 ::=              SEQUENCE {
    parametersTM9-r13                       MIMO-UE-ParametersPerTM-r13     OPTIONAL,
    parametersTM10-r13                      MIMO-UE-ParametersPerTM-r13     OPTIONAL,
    srs-EnhancementsTDD-r13                 ENUMERATED {supported}          OPTIONAL,
    srs-Enhancements-r13                    ENUMERATED {supported}          OPTIONAL,
    interferenceMeasRestriction-r13         ENUMERATED {supported}          OPTIONAL
}

MIMO-UE-ParametersPerTM-r13 ::=         SEQUENCE {
    nonPrecoded-r13                         MIMO-NonPrecodedCapabilities-r13    OPTIONAL,
    beamformed-r13                          MIMO-UE-BeamformedCapabilities-r13      OPTIONAL,
    channelMeasRestriction-r13              ENUMERATED {supported}              OPTIONAL,
    dmrs-Enhancements-r13                   ENUMERATED {supported}              OPTIONAL,
    csi-RS-EnhancementsTDD-r13              ENUMERATED {supported}              OPTIONAL
}

MIMO-CA-ParametersPerBoBC-r13 ::=       SEQUENCE {
    parametersTM9-r13                       MIMO-CA-ParametersPerBoBCPerTM-r13      OPTIONAL,
    parametersTM10-r13                      MIMO-CA-ParametersPerBoBCPerTM-r13      OPTIONAL
}

MIMO-CA-ParametersPerBoBCPerTM-r13 ::=  SEQUENCE {
    nonPrecoded-r13                         MIMO-NonPrecodedCapabilities-r13    OPTIONAL,
    beamformed-r13                          MIMO-BeamformedCapabilityList-r13   OPTIONAL,
    dmrs-Enhancements-r13                   ENUMERATED {different}              OPTIONAL
}

MIMO-NonPrecodedCapabilities-r13 ::=    SEQUENCE {
    config1-r13                             ENUMERATED {supported}          OPTIONAL,
    config2-r13                             ENUMERATED {supported}          OPTIONAL,
    config3-r13                             ENUMERATED {supported}          OPTIONAL,
    config4-r13                             ENUMERATED {supported}          OPTIONAL
}

MIMO-UE-BeamformedCapabilities-r13 ::=      SEQUENCE {
    altCodebook-r13                         ENUMERATED {supported}          OPTIONAL,
    mimo-BeamformedCapabilities-r13         MIMO-BeamformedCapabilityList-r13
}

MIMO-BeamformedCapabilityList-r13 ::=       SEQUENCE (SIZE (1..maxCSI-Proc-r11)) OF MIMO-
BeamformedCapabilities-r13

MIMO-BeamformedCapabilities-r13 ::=     SEQUENCE {
    k-Max-r13                               INTEGER (1..8),
    n-MaxList-r13                           BIT STRING (SIZE (1..7))        OPTIONAL
 }

NonContiguousUL-RA-WithinCC-List-r10 ::= SEQUENCE (SIZE (1..maxBands)) OF NonContiguousUL-RA-
WithinCC-r10

NonContiguousUL-RA-WithinCC-r10 ::=     SEQUENCE {
    nonContiguousUL-RA-WithinCC-Info-r10    ENUMERATED {supported}              OPTIONAL
}

RF-Parameters ::=                   SEQUENCE {
    supportedBandListEUTRA              SupportedBandListEUTRA
}

RF-Parameters-v9e0 ::=                  SEQUENCE {
    supportedBandListEUTRA-v9e0             SupportedBandListEUTRA-v9e0         OPTIONAL
}

RF-Parameters-v1020 ::=             SEQUENCE {
    supportedBandCombination-r10            SupportedBandCombination-r10
}

RF-Parameters-v1060 ::=             SEQUENCE {
    supportedBandCombinationExt-r10         SupportedBandCombinationExt-r10
}

RF-Parameters-v1090 ::=                 SEQUENCE {
    supportedBandCombination-v1090          SupportedBandCombination-v1090      OPTIONAL
}

RF-Parameters-v10f0 ::=                 SEQUENCE {
    modifiedMPR-Behavior-r10                BIT STRING (SIZE (32))              OPTIONAL
```


DAINGEAN_0002243

```
}

RF-Parameters-v10i0 ::=                 SEQUENCE {
    supportedBandCombination-v10i0          SupportedBandCombination-v10i0          OPTIONAL
}

RF-Parameters-v10j0 ::=                 SEQUENCE {
    multiNS-Pmax-r10                        ENUMERATED {supported}                  OPTIONAL
}

RF-Parameters-v1130 ::=             SEQUENCE {
    supportedBandCombination-v1130          SupportedBandCombination-v1130          OPTIONAL
}

RF-Parameters-v1180 ::=             SEQUENCE {
    freqBandRetrieval-r11                   ENUMERATED {supported}          OPTIONAL,
    requestedBands-r11                      SEQUENCE (SIZE (1.. maxBands)) OF FreqBandIndicator-r11
                        OPTIONAL,
    supportedBandCombinationAdd-r11         SupportedBandCombinationAdd-r11     OPTIONAL
}

RF-Parameters-v11d0 ::=                 SEQUENCE {
    supportedBandCombinationAdd-v11d0       SupportedBandCombinationAdd-v11d0       OPTIONAL
}

RF-Parameters-v1250 ::=             SEQUENCE {
    supportedBandListEUTRA-v1250             SupportedBandListEUTRA-v1250           OPTIONAL,
    supportedBandCombination-v1250          SupportedBandCombination-v1250          OPTIONAL,
    supportedBandCombinationAdd-v1250       SupportedBandCombinationAdd-v1250       OPTIONAL,
    freqBandPriorityAdjustment-r12          ENUMERATED {supported}                  OPTIONAL
}

RF-Parameters-v1270 ::=             SEQUENCE {
    supportedBandCombination-v1270          SupportedBandCombination-v1270          OPTIONAL,
    supportedBandCombinationAdd-v1270       SupportedBandCombinationAdd-v1270       OPTIONAL
}

RF-Parameters-v1310 ::=             SEQUENCE {
    eNB-RequestedParameters-r13         SEQUENCE {
        reducedIntNonContCombRequested-r13  ENUMERATED {true}                       OPTIONAL,
        requestedCCsDL-r13                  INTEGER (2..32)                         OPTIONAL,
        requestedCCsUL-r13                  INTEGER (2..32)                         OPTIONAL,
        skipFallbackCombRequested-r13       ENUMERATED {true}                       OPTIONAL
    }                                                                               OPTIONAL,
    maximumCCsRetrieval-r13                 ENUMERATED {supported}                  OPTIONAL,
    skipFallbackCombinations-r13            ENUMERATED {supported}                  OPTIONAL,
    reducedIntNonContComb-r13               ENUMERATED {supported}                  OPTIONAL,
    supportedBandListEUTRA-v1310            SupportedBandListEUTRA-v1310            OPTIONAL,
    supportedBandCombinationReduced-r13     SupportedBandCombinationReduced-r13     OPTIONAL
}

RF-Parameters-v1320 ::=             SEQUENCE {
    supportedBandListEUTRA-v1320            SupportedBandListEUTRA-v1320            OPTIONAL,
    supportedBandCombination-v1320          SupportedBandCombination-v1320          OPTIONAL,
    supportedBandCombinationAdd-v1320       SupportedBandCombinationAdd-v1320       OPTIONAL,
    supportedBandCombinationReduced-v1320   SupportedBandCombinationReduced-v1320   OPTIONAL
}

SupportedBandCombination-r10 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF BandCombinationParameters-
r10

SupportedBandCombinationExt-r10 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParametersExt-r10

SupportedBandCombination-v1090 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v1090

SupportedBandCombination-v10i0 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v10i0

SupportedBandCombination-v1130 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v1130

SupportedBandCombination-v1250 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v1250

SupportedBandCombination-v1270 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v1270
```


DAINGEAN_0002244

```
SupportedBandCombination-v1320 ::= SEQUENCE (SIZE (1..maxBandComb-r10)) OF
BandCombinationParameters-v1320

SupportedBandCombinationAdd-r11 ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF
BandCombinationParameters-r11

SupportedBandCombinationAdd-v11d0 ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF
BandCombinationParameters-v10i0

SupportedBandCombinationAdd-v1250 ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF
BandCombinationParameters-v1250

SupportedBandCombinationAdd-v1270 ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF
BandCombinationParameters-v1270

SupportedBandCombinationAdd-v1320 ::= SEQUENCE (SIZE (1..maxBandComb-r11)) OF
BandCombinationParameters-v1320

SupportedBandCombinationReduced-r13 ::= SEQUENCE (SIZE (1..maxBandComb-r13)) OF
BandCombinationParameters-r13

SupportedBandCombinationReduced-v1320 ::=   SEQUENCE (SIZE (1..maxBandComb-r13)) OF
BandCombinationParameters-v1320

BandCombinationParameters-r10 ::= SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF BandParameters-
r10

BandCombinationParametersExt-r10 ::= SEQUENCE {
    supportedBandwidthCombinationSet-r10    SupportedBandwidthCombinationSet-r10    OPTIONAL
}

BandCombinationParameters-v1090 ::= SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF BandParameters-
v1090

BandCombinationParameters-v10i0::= SEQUENCE {
bandParameterList-v10i0         SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF
           BandParameters-v10i0    OPTIONAL
}

BandCombinationParameters-v1130 ::= SEQUENCE {
    multipleTimingAdvance-r11       ENUMERATED {supported}                  OPTIONAL,
    simultaneousRx-Tx-r11           ENUMERATED {supported}                  OPTIONAL,
    bandParameterList-r11           SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF BandParameters-
v1130   OPTIONAL,
    ...
}

BandCombinationParameters-r11 ::=   SEQUENCE {
    bandParameterList-r11           SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF
           BandParameters-r11,
    supportedBandwidthCombinationSet-r11    SupportedBandwidthCombinationSet-r10    OPTIONAL,
    multipleTimingAdvance-r11       ENUMERATED {supported}                  OPTIONAL,
    simultaneousRx-Tx-r11           ENUMERATED {supported}                  OPTIONAL,
    bandInfoEUTRA-r11               BandInfoEUTRA,
    ...
}

BandCombinationParameters-v1250::= SEQUENCE {
    dc-Support-r12                  SEQUENCE {
        asynchronous-r12                ENUMERATED {supported}          OPTIONAL,
        supportedCellGrouping-r12       CHOICE {
                threeEntries-r12                BIT STRING (SIZE(3)),
                fourEntries-r12                 BIT STRING (SIZE(7)),
                fiveEntries-r12                 BIT STRING (SIZE(15))
        }                                                               OPTIONAL
    }                                                                   OPTIONAL,
    supportedNAICS-2CRS-AP-r12      BIT STRING (SIZE (1..maxNAICS-Entries-r12))     OPTIONAL,
    commSupportedBandsPerBC-r12             BIT STRING (SIZE (1.. maxBands))        OPTIONAL,
    ...
}

BandCombinationParameters-v1270 ::= SEQUENCE {
    bandParameterList-v1270         SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF
           BandParameters-v1270        OPTIONAL
}

BandCombinationParameters-r13 ::=  SEQUENCE {
```


DAINGEAN_0002245

```
    differentFallbackSupported-r13  ENUMERATED {true}              OPTIONAL,
    bandParameterList-r13           SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF BandParameters-
r13,
    supportedBandwidthCombinationSet-r13    SupportedBandwidthCombinationSet-r10    OPTIONAL,
    multipleTimingAdvance-r13       ENUMERATED {supported}              OPTIONAL,
    simultaneousRx-Tx-r13           ENUMERATED {supported}              OPTIONAL,
    bandInfoEUTRA-r13               BandInfoEUTRA,
    dc-Support-r13                  SEQUENCE {
        asynchronous-r13            ENUMERATED {supported}              OPTIONAL,
        supportedCellGrouping-r13       CHOICE {
                threeEntries-r13                BIT STRING (SIZE(3)),
                fourEntries-r13                 BIT STRING (SIZE(7)),
                fiveEntries-r13                 BIT STRING (SIZE(15))
        }                                                               OPTIONAL
    }                                                                   OPTIONAL,
    supportedNAICS-2CRS-AP-r13      BIT STRING (SIZE (1..maxNAICS-Entries-r12)) OPTIONAL,
    commSupportedBandsPerBC-r13     BIT STRING (SIZE (1.. maxBands))        OPTIONAL
}

BandCombinationParameters-v1320 ::= SEQUENCE {
    bandParameterList-v1320         SEQUENCE (SIZE (1..maxSimultaneousBands-r10)) OF
            BandParameters-v1320        OPTIONAL,
    additionalRx-Tx-PerformanceReq-r13      ENUMERATED {supported}                  OPTIONAL
}

SupportedBandwidthCombinationSet-r10 ::=    BIT STRING (SIZE (1..maxBandwidthCombSet-r10))

BandParameters-r10 ::= SEQUENCE {
    bandEUTRA-r10                   FreqBandIndicator,
    bandParametersUL-r10            BandParametersUL-r10                    OPTIONAL,
    bandParametersDL-r10            BandParametersDL-r10                    OPTIONAL
}

BandParameters-v1090 ::= SEQUENCE {
    bandEUTRA-v1090                 FreqBandIndicator-v9e0                  OPTIONAL,
    ...
}

BandParameters-v10i0::= SEQUENCE {
    bandParametersDL-v10i0      SEQUENCE (SIZE (1..maxBandwidthClass-r10)) OF CA-MIMO-ParametersDL-
v10i0
}

BandParameters-v1130 ::= SEQUENCE {
    supportedCSI-Proc-r11           ENUMERATED {n1, n3, n4}
}

BandParameters-r11 ::= SEQUENCE {
    bandEUTRA-r11                   FreqBandIndicator-r11,
    bandParametersUL-r11            BandParametersUL-r10                    OPTIONAL,
    bandParametersDL-r11            BandParametersDL-r10                    OPTIONAL,
    supportedCSI-Proc-r11           ENUMERATED {n1, n3, n4}                 OPTIONAL
}

BandParameters-v1270 ::= SEQUENCE {
    bandParametersDL-v1270          SEQUENCE (SIZE (1..maxBandwidthClass-r10)) OF CA-MIMO-
ParametersDL-v1270
}

BandParameters-r13 ::= SEQUENCE {
    bandEUTRA-r13                   FreqBandIndicator-r11,
    bandParametersUL-r13                BandParametersUL-r13                OPTIONAL,
    bandParametersDL-r13                BandParametersDL-r13                OPTIONAL,
    supportedCSI-Proc-r13           ENUMERATED {n1, n3, n4}         OPTIONAL
}

BandParameters-v1320 ::= SEQUENCE {
    bandParametersDL-v1320          MIMO-CA-ParametersPerBoBC-r13
}

BandParametersUL-r10 ::= SEQUENCE (SIZE (1..maxBandwidthClass-r10)) OF CA-MIMO-ParametersUL-r10

BandParametersUL-r13 ::= CA-MIMO-ParametersUL-r10


CA-MIMO-ParametersUL-r10 ::= SEQUENCE {
    ca-BandwidthClassUL-r10         CA-BandwidthClass-r10,
    supportedMIMO-CapabilityUL-r10      MIMO-CapabilityUL-r10               OPTIONAL
```


DAINGEAN_0002246

```
}

BandParametersDL-r10 ::= SEQUENCE (SIZE (1..maxBandwidthClass-r10)) OF CA-MIMO-ParametersDL-r10

BandParametersDL-r13 ::= CA-MIMO-ParametersDL-r13

CA-MIMO-ParametersDL-r10 ::= SEQUENCE {
    ca-BandwidthClassDL-r10             CA-BandwidthClass-r10,
    supportedMIMO-CapabilityDL-r10      MIMO-CapabilityDL-r10               OPTIONAL
}

CA-MIMO-ParametersDL-v10i0 ::= SEQUENCE {
    fourLayerTM3-TM4-r10                ENUMERATED {supported}              OPTIONAL
}

CA-MIMO-ParametersDL-v1270 ::= SEQUENCE {
    intraBandContiguousCC-InfoList-r12          SEQUENCE (SIZE (1..maxServCell-r10)) OF
IntraBandContiguousCC-Info-r12
}

CA-MIMO-ParametersDL-r13 ::= SEQUENCE {
    ca-BandwidthClassDL-r13                 CA-BandwidthClass-r10,
    supportedMIMO-CapabilityDL-r13          MIMO-CapabilityDL-r10               OPTIONAL,
    fourLayerTM3-TM4-r13                        ENUMERATED {supported}              OPTIONAL,
    intraBandContiguousCC-InfoList-r13      SEQUENCE (SIZE (1..maxServCell-r13)) OF
IntraBandContiguousCC-Info-r12
}

IntraBandContiguousCC-Info-r12 ::= SEQUENCE {
    fourLayerTM3-TM4-perCC-r12          ENUMERATED {supported}              OPTIONAL,
    supportedMIMO-CapabilityDL-r12      MIMO-CapabilityDL-r10               OPTIONAL,
    supportedCSI-Proc-r12               ENUMERATED {n1, n3, n4}             OPTIONAL
}

CA-BandwidthClass-r10 ::= ENUMERATED {a, b, c, d, e, f, ...}

MIMO-CapabilityUL-r10 ::= ENUMERATED {twoLayers, fourLayers}

MIMO-CapabilityDL-r10 ::= ENUMERATED {twoLayers, fourLayers, eightLayers}

SupportedBandListEUTRA ::=          SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA

SupportedBandListEUTRA-v9e0::=          SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA-v9e0

SupportedBandListEUTRA-v1250 ::=        SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA-v1250

SupportedBandListEUTRA-v1310 ::=        SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA-v1310

SupportedBandListEUTRA-v1320 ::=        SEQUENCE (SIZE (1..maxBands)) OF SupportedBandEUTRA-v1320

SupportedBandEUTRA ::=              SEQUENCE {
    bandEUTRA                           FreqBandIndicator,
    halfDuplex                          BOOLEAN
}

SupportedBandEUTRA-v9e0 ::=     SEQUENCE {
    bandEUTRA-v9e0                      FreqBandIndicator-v9e0      OPTIONAL
}

SupportedBandEUTRA-v1250 ::=        SEQUENCE {
    dl-256QAM-r12                       ENUMERATED {supported}      OPTIONAL,
    ul-64QAM-r12                        ENUMERATED {supported}      OPTIONAL
}

SupportedBandEUTRA-v1310 ::=        SEQUENCE {
    ue-PowerClass-5-r13         ENUMERATED {supported}      OPTIONAL
}
SupportedBandEUTRA-v1320 ::=        SEQUENCE {
    intraFreq-CE-NeedForGaps-r13                ENUMERATED {supported}              OPTIONAL,
    ue-PowerClass-N-r13         ENUMERATED {class1, class2, class4}     OPTIONAL
}

MeasParameters ::=                  SEQUENCE {
    bandListEUTRA                       BandListEUTRA
}

MeasParameters-v1020 ::=            SEQUENCE {
    bandCombinationListEUTRA-r10            BandCombinationListEUTRA-r10
```


DAINGEAN_0002247

```
}

MeasParameters-v1130 ::=            SEQUENCE {
    rsrqMeasWideband-r11            ENUMERATED {supported}                  OPTIONAL
}

MeasParameters-v11a0 ::=            SEQUENCE {
    benefitsFromInterruption-r11            ENUMERATED {true}               OPTIONAL
}

MeasParameters-v1250 ::=            SEQUENCE {
    timerT312-r12                       ENUMERATED {supported}      OPTIONAL,
    alternativeTimeToTrigger-r12        ENUMERATED {supported}      OPTIONAL,
    incMonEUTRA-r12                     ENUMERATED {supported}      OPTIONAL,
    incMonUTRA-r12                      ENUMERATED {supported}      OPTIONAL,
    extendedMaxMeasId-r12               ENUMERATED {supported}      OPTIONAL,
    extendedRSRQ-LowerRange-r12         ENUMERATED {supported}      OPTIONAL,
    rsrq-OnAllSymbols-r12               ENUMERATED {supported}      OPTIONAL,
    crs-DiscoverySignalsMeas-r12        ENUMERATED {supported}      OPTIONAL,
    csi-RS-DiscoverySignalsMeas-r12     ENUMERATED {supported}      OPTIONAL
}

MeasParameters-v1310 ::=            SEQUENCE {
    rs-SINR-Meas-r13                        ENUMERATED {supported}      OPTIONAL,
    whiteCellList-r13                       ENUMERATED {supported}      OPTIONAL,
    extendedMaxObjectId-r13                 ENUMERATED {supported}      OPTIONAL,
    ul-PDCP-Delay-r13                       ENUMERATED {supported}      OPTIONAL,
    extendedFreqPriorities-r13              ENUMERATED {supported}      OPTIONAL,
    multiBandInfoReport-r13                 ENUMERATED {supported}      OPTIONAL,
    rssi-AndChannelOccupancyReporting-r13   ENUMERATED {supported}      OPTIONAL
}

BandListEUTRA ::=                   SEQUENCE (SIZE (1..maxBands)) OF BandInfoEUTRA

BandCombinationListEUTRA-r10 ::=    SEQUENCE (SIZE (1..maxBandComb-r10)) OF BandInfoEUTRA

BandInfoEUTRA ::=                   SEQUENCE {
    interFreqBandList                   InterFreqBandList,
    interRAT-BandList                   InterRAT-BandList       OPTIONAL
}

InterFreqBandList ::=               SEQUENCE (SIZE (1..maxBands)) OF InterFreqBandInfo

InterFreqBandInfo ::=               SEQUENCE {
    interFreqNeedForGaps                BOOLEAN
}

InterRAT-BandList ::=               SEQUENCE (SIZE (1..maxBands)) OF InterRAT-BandInfo

InterRAT-BandInfo ::=               SEQUENCE {
    interRAT-NeedForGaps                BOOLEAN
}

IRAT-ParametersUTRA-FDD ::=     SEQUENCE {
    supportedBandListUTRA-FDD           SupportedBandListUTRA-FDD
}

IRAT-ParametersUTRA-v920 ::=        SEQUENCE {
    e-RedirectionUTRA-r9                ENUMERATED {supported}
}

IRAT-ParametersUTRA-v9c0 ::=        SEQUENCE {
    voiceOverPS-HS-UTRA-FDD-r9                  ENUMERATED {supported}      OPTIONAL,
    voiceOverPS-HS-UTRA-TDD128-r9               ENUMERATED {supported}      OPTIONAL,
    srvcc-FromUTRA-FDD-ToUTRA-FDD-r9            ENUMERATED {supported}      OPTIONAL,
    srvcc-FromUTRA-FDD-ToGERAN-r9               ENUMERATED {supported}      OPTIONAL,
    srvcc-FromUTRA-TDD128-ToUTRA-TDD128-r9      ENUMERATED {supported}      OPTIONAL,
    srvcc-FromUTRA-TDD128-ToGERAN-r9            ENUMERATED {supported}      OPTIONAL
}

IRAT-ParametersUTRA-v9h0 ::=        SEQUENCE {
    mfbi-UTRA-r9                        ENUMERATED {supported}
}

SupportedBandListUTRA-FDD ::=       SEQUENCE (SIZE (1..maxBands)) OF SupportedBandUTRA-FDD

SupportedBandUTRA-FDD ::=           ENUMERATED {
                                        bandI, bandII, bandIII, bandIV, bandV, bandVI,
```


DAINGEAN_0002248

```
                                    bandVII, bandVIII, bandIX, bandX, bandXI,
                                    bandXII, bandXIII, bandXIV, bandXV, bandXVI, ...,
                                    bandXVII-8a0, bandXVIII-8a0, bandXIX-8a0, bandXX-8a0,
                                    bandXXI-8a0, bandXXII-8a0, bandXXIII-8a0, bandXXIV-8a0,
                                    bandXXV-8a0, bandXXVI-8a0, bandXXVII-8a0, bandXXVIII-8a0,
                                    bandXXIX-8a0, bandXXX-8a0, bandXXXI-8a0, bandXXXII-8a0}

IRAT-ParametersUTRA-TDD128 ::=      SEQUENCE {
    supportedBandListUTRA-TDD128        SupportedBandListUTRA-TDD128
}

SupportedBandListUTRA-TDD128 ::=    SEQUENCE (SIZE (1..maxBands)) OF SupportedBandUTRA-TDD128

SupportedBandUTRA-TDD128 ::=        ENUMERATED {
                                        a, b, c, d, e, f, g, h, i, j, k, l, m, n,
                                        o, p, ...}

IRAT-ParametersUTRA-TDD384 ::=      SEQUENCE {
    supportedBandListUTRA-TDD384        SupportedBandListUTRA-TDD384
}

SupportedBandListUTRA-TDD384 ::=    SEQUENCE (SIZE (1..maxBands)) OF SupportedBandUTRA-TDD384

SupportedBandUTRA-TDD384 ::=        ENUMERATED {
                                            a, b, c, d, e, f, g, h, i, j, k, l, m, n,
                                            o, p, ...}

IRAT-ParametersUTRA-TDD768 ::=      SEQUENCE {
    supportedBandListUTRA-TDD768        SupportedBandListUTRA-TDD768
}

SupportedBandListUTRA-TDD768 ::=    SEQUENCE (SIZE (1..maxBands)) OF SupportedBandUTRA-TDD768

SupportedBandUTRA-TDD768 ::=        ENUMERATED {
                                        a, b, c, d, e, f, g, h, i, j, k, l, m, n,
                                        o, p, ...}

IRAT-ParametersUTRA-TDD-v1020 ::=       SEQUENCE {
    e-RedirectionUTRA-TDD-r10               ENUMERATED {supported}
}

IRAT-ParametersGERAN ::=            SEQUENCE {
    supportedBandListGERAN              SupportedBandListGERAN,
    interRAT-PS-HO-ToGERAN              BOOLEAN
}

IRAT-ParametersGERAN-v920 ::=       SEQUENCE {
    dtm-r9                              ENUMERATED {supported}          OPTIONAL,
    e-RedirectionGERAN-r9               ENUMERATED {supported}          OPTIONAL
}

SupportedBandListGERAN ::=          SEQUENCE (SIZE (1..maxBands)) OF SupportedBandGERAN

SupportedBandGERAN ::=              ENUMERATED {
                                        gsm450, gsm480, gsm710, gsm750, gsm810, gsm850,
                                        gsm900P, gsm900E, gsm900R, gsm1800, gsm1900,
                                        spare5, spare4, spare3, spare2, spare1, ...}

IRAT-ParametersCDMA2000-HRPD ::=    SEQUENCE {
    supportedBandListHRPD               SupportedBandListHRPD,
    tx-ConfigHRPD                       ENUMERATED {single, dual},
    rx-ConfigHRPD                       ENUMERATED {single, dual}
}

SupportedBandListHRPD ::=           SEQUENCE (SIZE (1..maxCDMA-BandClass)) OF BandclassCDMA2000

IRAT-ParametersCDMA2000-1XRTT ::=   SEQUENCE {
    supportedBandList1XRTT              SupportedBandList1XRTT,
    tx-Config1XRTT                      ENUMERATED {single, dual},
    rx-Config1XRTT                      ENUMERATED {single, dual}
}

IRAT-ParametersCDMA2000-1XRTT-v920 ::=  SEQUENCE {
    e-CSFB-1XRTT-r9                     ENUMERATED {supported},
    e-CSFB-ConcPS-Mob1XRTT-r9           ENUMERATED {supported}          OPTIONAL
}

IRAT-ParametersCDMA2000-1XRTT-v1020 ::= SEQUENCE {
```


DAINGEAN_0002249

```
    e-CSFB-dual-1XRTT-r10               ENUMERATED {supported}
}

IRAT-ParametersCDMA2000-v1130 ::=       SEQUENCE {
    cdma2000-NW-Sharing-r11                 ENUMERATED {supported}      OPTIONAL
}

SupportedBandList1XRTT ::=          SEQUENCE (SIZE (1..maxCDMA-BandClass)) OF BandclassCDMA2000

IRAT-ParametersWLAN-r13 ::=     SEQUENCE {
    supportedBandListWLAN-r13       SEQUENCE (SIZE (1..maxWLAN-Bands-r13)) OF WLAN-BandIndicator-r13
                    OPTIONAL
}

CSG-ProximityIndicationParameters-r9 ::=    SEQUENCE {
    intraFreqProximityIndication-r9 ENUMERATED {supported}          OPTIONAL,
    interFreqProximityIndication-r9 ENUMERATED {supported}          OPTIONAL,
    utran-ProximityIndication-r9        ENUMERATED {supported}          OPTIONAL
}

NeighCellSI-AcquisitionParameters-r9 ::=    SEQUENCE {
    intraFreqSI-AcquisitionForHO-r9 ENUMERATED {supported}          OPTIONAL,
    interFreqSI-AcquisitionForHO-r9 ENUMERATED {supported}          OPTIONAL,
    utran-SI-AcquisitionForHO-r9        ENUMERATED {supported}          OPTIONAL
}

SON-Parameters-r9 ::=               SEQUENCE {
    rach-Report-r9                      ENUMERATED {supported}          OPTIONAL
}

UE-BasedNetwPerfMeasParameters-r10 ::=  SEQUENCE {
    loggedMeasurementsIdle-r10              ENUMERATED {supported}      OPTIONAL,
    standaloneGNSS-Location-r10             ENUMERATED {supported}      OPTIONAL
}

UE-BasedNetwPerfMeasParameters-v1250 ::=    SEQUENCE {
    loggedMBSFNMeasurements-r12             ENUMERATED {supported}
}

OTDOA-PositioningCapabilities-r10 ::=   SEQUENCE {
    otdoa-UE-Assisted-r10                   ENUMERATED {supported},
    interFreqRSTD-Measurement-r10           ENUMERATED {supported}      OPTIONAL
}

Other-Parameters-r11 ::=                SEQUENCE {
    inDeviceCoexInd-r11                     ENUMERATED {supported}      OPTIONAL,
    powerPrefInd-r11                        ENUMERATED {supported}      OPTIONAL,
    ue-Rx-TxTimeDiffMeasurements-r11        ENUMERATED {supported}      OPTIONAL
}

Other-Parameters-v11d0 ::=              SEQUENCE {
    inDeviceCoexInd-UL-CA-r11               ENUMERATED {supported}      OPTIONAL
}

MBMS-Parameters-r11 ::=             SEQUENCE {
    mbms-SCell-r11                          ENUMERATED {supported}      OPTIONAL,
    mbms-NonServingCell-r11                 ENUMERATED {supported}      OPTIONAL
}

MBMS-Parameters-v1250 ::=               SEQUENCE {
    mbms-AsyncDC-r12                        ENUMERATED {supported}      OPTIONAL
}

SCPTM-Parameters-r13 ::=                SEQUENCE {
    scptm-ParallelReception-r13                 ENUMERATED {supported}      OPTIONAL,
    scptm-SCell-r13                             ENUMERATED {supported}      OPTIONAL,
    scptm-NonServingCell-r13                    ENUMERATED {supported}      OPTIONAL,
    scptm-AsyncDC-r13                           ENUMERATED {supported}      OPTIONAL
}

CE-Parameters-r13 ::=       SEQUENCE {
    ce-ModeA-r13                        ENUMERATED {supported}              OPTIONAL,
    ce-ModeB-r13                        ENUMERATED {supported}              OPTIONAL
}

CE-Parameters-v1320 ::=     SEQUENCE {
    intraFreqA3-CE-ModeA-r13                ENUMERATED {supported}              OPTIONAL,
    intraFreqA3-CE-ModeB-r13                ENUMERATED {supported}              OPTIONAL,
```


DAINGEAN_0002250

```
    intraFreqHO-CE-ModeA-r13                ENUMERATED {supported}              OPTIONAL,
    intraFreqHO-CE-ModeB-r13                ENUMERATED {supported}              OPTIONAL
}

LAA-Parameters-r13 ::=              SEQUENCE {
    crossCarrierSchedulingLAA-DL-r13            ENUMERATED {supported}      OPTIONAL,
    csi-RS-DRS-RRM-MeasurementsLAA-r13          ENUMERATED {supported}      OPTIONAL,
    downlinkLAA-r13                             ENUMERATED {supported}      OPTIONAL,
    endingDwPTS-r13                             ENUMERATED {supported}      OPTIONAL,
    secondSlotStartingPosition-r13              ENUMERATED {supported}      OPTIONAL,
    tm9-LAA-r13                                 ENUMERATED {supported}      OPTIONAL,
    tm10-LAA-r13                                ENUMERATED {supported}      OPTIONAL
}

WLAN-IW-Parameters-r12 ::=  SEQUENCE {
    wlan-IW-RAN-Rules-r12                   ENUMERATED {supported}      OPTIONAL,
    wlan-IW-ANDSF-Policies-r12                      ENUMERATED {supported}      OPTIONAL
}

LWA-Parameters-r13 ::=      SEQUENCE {
    lwa-r13                     ENUMERATED {supported}      OPTIONAL,
    lwa-SplitBearer-r13         ENUMERATED {supported}      OPTIONAL,
    wlan-MAC-Address-r13        OCTET STRING (SIZE (6))     OPTIONAL,
    lwa-BufferSize-r13          ENUMERATED {supported}      OPTIONAL
}

WLAN-IW-Parameters-v1310 ::=    SEQUENCE {
    rclwi-r13                                       ENUMERATED {supported}      OPTIONAL
}

LWIP-Parameters-r13 ::=     SEQUENCE {
    lwip-r13                    ENUMERATED {supported}              OPTIONAL
}

NAICS-Capability-List-r12 ::= SEQUENCE (SIZE (1..maxNAICS-Entries-r12)) OF NAICS-Capability-Entry-
r12


NAICS-Capability-Entry-r12  ::= SEQUENCE {
    numberOfNAICS-CapableCC-r12             INTEGER(1..5),
    numberOfAggregatedPRB-r12               ENUMERATED {
                                                n50, n75, n100, n125, n150, n175,
                                                n200, n225, n250, n275, n300, n350,
                                                n400, n450, n500, spare},
    ...
}

SL-Parameters-r12 ::=               SEQUENCE {
    commSimultaneousTx-r12                  ENUMERATED {supported}      OPTIONAL,
    commSupportedBands-r12                  FreqBandIndicatorListEUTRA-r12  OPTIONAL,
    discSupportedBands-r12                  SupportedBandInfoList-r12   OPTIONAL,
    discScheduledResourceAlloc-r12          ENUMERATED {supported}      OPTIONAL,
    disc-UE-SelectedResourceAlloc-r12       ENUMERATED {supported}      OPTIONAL,
    disc-SLSS-r12                           ENUMERATED {supported}      OPTIONAL,
    discSupportedProc-r12                   ENUMERATED {n50, n400}      OPTIONAL
}

SL-Parameters-v1310 ::=             SEQUENCE {
    discSysInfoReporting-r13                    ENUMERATED {supported}      OPTIONAL,
    commMultipleTx-r13                          ENUMERATED {supported}      OPTIONAL,
    discInterFreqTx-r13                         ENUMERATED {supported}      OPTIONAL,
    discPeriodicSLSS-r13                        ENUMERATED {supported}      OPTIONAL
}


SupportedBandInfoList-r12 ::=       SEQUENCE (SIZE (1..maxBands)) OF SupportedBandInfo-r12

SupportedBandInfo-r12 ::=           SEQUENCE {
    support-r12                             ENUMERATED {supported}  OPTIONAL
}

FreqBandIndicatorListEUTRA-r12 ::=      SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicator-r11

-- ASN1STOP
```


DAINGEAN_0002251

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
accessStratumRelease Set to rel13 in this version of the specification.	-
additionalRx-Tx-PerformanceReq Indicates whether the UE supports the additional Rx and Tx performance requirement for a given band combination as specified in TS 36.101 [42].	-
alternativeTBS-Indices Indicates whether the UE supports alternative TBS indices for I_{TBS} 26 and 33 as specified in TS 36.213 [23].	-
alternativeTimeToTrigger Indicates whether the UE supports alternativeTimeToTrigger.	No
aperiodicCSI-Reporting Indicates whether the UE supports aperiodic CSI reporting with 3 bits of the CSI request field size as specified in TS 36.213 [23, 7.2.1] and/or aperiodic CSI reporting mode 1-0 and mode 1-1 as specified in TS 36.213 [23, 7.2.1]. The first bit is set to "1" if the UE supports the aperiodic CSI reporting with 3 bits of the CSI request field size. The second bit is set to "1" if the UE supports the aperiodic CSI reporting mode 1-0 and mode 1-1.	No
bandCombinationListEUTRA One entry corresponding to each supported band combination listed in the same order as in *supportedBandCombination*.	-
BandCombinationParameters-v1090 If included, the UE shall include the same number of entries, and listed in the same order, as in *BandCombinationParameters-r10*.	-
BandCombinationParameters-v1130 The field is applicable to each supported CA bandwidth class combination (i.e. CA configuration in TS 36.101 [42, Section 5.6A.1]) indicated in the corresponding band combination. If included, the UE shall include the same number of entries, and listed in the same order, as in *BandCombinationParameters-r10*.	-
bandEUTRA E-UTRA band as defined in TS 36.101 [42]. In case the UE includes *bandEUTRA-v9e0* or *bandEUTRA-v1090*, the UE shall set the corresponding entry of *bandEUTRA* (i.e. without suffix) or *bandEUTRA-r10* respectively to *maxFBI*.	-
bandListEUTRA One entry corresponding to each supported E-UTRA band listed in the same order as in *supportedBandListEUTRA*.	-
bandParametersUL, bandParametersDL Indicates the supported parameters for the band. UE shall indicate parameters for only one CA uplink or downlink bandwidth class in a single band entry for one band combination entry.	-
beamformed (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode, the UE capabilities concerning beamformed EBF/ FD-MIMO operation (class B) applicable for the concerned band combination.	-
beamformed (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode, the UE capabilities concerning beamformed EBF/ FD-MIMO operation (class B) applicable for band combinations for which the concerned capabilities are not signalled.	TBD
benefitsFromInterruption Indicates whether the UE power consumption would benefit from being allowed to cause interruptions to serving cells when performing measurements of deactivated SCell carriers for *measCycleSCell* of less than 640ms, as specified in TS 36.133 [16].	No
ce-ModeA, ce-ModeB Indicates whether the UE supports operation in CE mode A and/or B, as specified in TS 36.211 [21] and TS 36.213 [23].	-
CA-BandwidthClass The CA bandwidth class supported by the UE as defined in TS 36.101 [42, Table 5.6A-1]. The UE explicitly includes all the supported CA bandwidth class combinations in the band combination signalling. Support for one CA bandwidth class does not implicitly indicate support for another CA bandwidth class.	-
cdma2000-NW-Sharing Indicates whether the UE supports network sharing for CDMA2000.	-
channelMeasRestriction Indicates for a particular transmission mode whether the UE supports channel measurement restriction.	TBD
codebook-HARQ-ACK Indicates whether the UE supports determining HARQ ACK codebook size based on the DAI-ased solution and/or the number of configured CCs. The first bit is set to "1" if the UE supports the DAI-based codebook size determination. The second bit is set to "1" if the UE supports the	No

DAINGEAN_0002252

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
codebook determination based on the number of configured CCs.	
commMultipleTx Indicates whether the UE supports multiple transmissions of sidelink communication to different destinations in one SC period. If *commMultipleTx-r-13* is set to supported then the UE support 8 transmitting sidelink processes.	-
commSimultaneousTx Indicates whether the UE supports simultaneous transmission of EUTRA and sidelink communication (on different carriers) in all bands for which the UE indicated sidelink support in a band combination (using *commSupportedBandsPerBC*).	-
commSupportedBands Indicates the bands on which the UE supports sidelink communication, by an independent list of bands i.e. separate from the list of supported E UTRA band, as indicated in *supportedBandListEUTRA*.	-
commSupportedBandsPerBC Indicates, for a particular band combination, the bands on which the UE supports simultaneous reception of EUTRA and sidelink communication. If the UE indicates support simultaneous transmission (using *commSimultaneousTx*), it also indicates, for a particular band combination, the bands on which the UE supports simultaneous transmission of EUTRA and sidelink communication. The first bit refers to the first band included in *commSupportedBands*, with value 1 indicating sidelink is supported.	-
configN (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode whether the UE supports non-precoded EBF/ FD-MIMO (class A) related configuration N for the concerned band combination.	-
configN (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode whether the UE supports non-precoded EBF/ FD-MIMO (class A) related configuration N for band combinations for which the concerned capabilities are not signalled.	TBD
crossCarrierScheduling	Yes
crossCarrierScheduling-B5C Indicates whether the UE supports cross carrier scheduling beyond 5 DL CCs.	No
crossCarrierSchedulingLAA-DL Indicates whether the UE supports cross-carrier scheduling from a licensed carrier for LAA cell(s) for downlink. This field can be included only if *downlinkLAA* is included.	-
crs-DiscoverySignalsMeas Indicates whether the UE supports CRS based discovery signals measurement, and PDSCH/EPDCCH RE mapping with zero power CSI-RS configured for discovery signals.	FFS
crs-InterfHandl Indicates whether the UE supports CRS interference handling.	No
crs-InterfMitigationTM10 The field defines whether the UE supports CRS interference mitigation in transmission mode 10.	-
csi-RS-DiscoverySignalsMeas Indicates whether the UE supports CSI-RS based discovery signals measurement. If this field is included, the UE shall also include *crs-DiscoverySignalsMeas*.	FFS
csi-RS-DRS-RRM-MeasurementsLAA Indicates whether the UE supports performing RRM measurements on LAA cell(s) based on CSI-RS-based DRS. This field can be included only if *downlinkLAA* is included.	-
csi-RS-EnhancementsTDD Indicates for a particular transmission mode whether the UE supports CSI-RS enhancements applicable for TDD.	No
csi-SubframeSet Indicates whether the UE supports REL-12 DL CSI subframe set configuration, REL-12 DL CSI subframe set dependent CSI measurement/feedback, configuration of up to 2 CSI-IM resources for a CSI process with no more than 4 CSI-IM resources for all CSI processes of one frequency if the UE supports tm10, configuration of two ZP-CSI-RS for tm1 to tm9, PDSCH RE mapping with two ZP-CSI-RS configurations, and EPDCCH RE mapping with two ZP-CSI-RS configurations if the UE supports EPDCCH. This field is only applicable for UEs supporting TDD.	-
dc-Support Including this field indicates that the UE supports synchronous DC and power control mode 1. Including this field for a band combination entry comprising of single band entry indicates that the UE supports intra-band contiguous DC. Including this field for a band combination entry comprising of two or more band entries, indicates that the UE supports DC for these bands and that the serving cells corresponding to a band entry shall belong to one cell group (i.e. MCG or SCG). Including field *asynchronous* indicates that the UE supports asynchronous DC and	-

DAINGEAN_0002253

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
power control mode 2. Including this field for a TDD/FDD band combination indicates that the UE supports TDD/FDD DC for this band combination.	
deviceType UE may set the value to "*noBenFromBatConsumpOpt*" when it does not foresee to particularly benefit from NW-based battery consumption optimisation. Absence of this value means that the device does benefit from NW-based battery consumption optimisation.	-
differentFallbackSupported Indicates that the UE supports different capabilities for at least one fallback case of this band combination.	-
discInterFreqTx Indicates whether the UE support sidelink discovery announcements either a) on the primary frequency only or b) on other frequencies also, regardless of the UE configuration (e.g. CA, DC). The UE may set discInterFreqTx to supported when having a separate transmitter or if it can request sidelink discovery transmission gaps.	-
discoverySignalsInDeactSCell Indicates whether the UE supports the behaviour on DL signals and physical channels when SCell is deactivated and discovery signals measurement is configured as specified in TS 36.211 [21, 6.11A]. This field is included only if UE supports carrier aggregation and includes *crs-DiscoverySignalsMeas*.	FFS
discPeriodicSLSS Indicates whether the UE supports periodic (i.e. not just one time before sidelink discovery announcement) Sidelink Synchronization Signal (SLSS) transmission and reception for sidelink discovery.	-
discScheduledResourceAlloc Indicates whether the UE supports transmission of discovery announcements based on network scheduled resource allocation.	-
disc-UE-SelectedResourceAlloc Indicates whether the UE supports transmission of discovery announcements based on UE autonomous resource selection.	-
disc-SLSS Indicates whether the UE supports Sidelink Synchronization Signal (SLSS) transmission and reception for sidelink discovery.	-
discSupportedBands Indicates the bands on which the UE supports sidelink discovery. One entry corresponding to each supported E UTRA band, listed in the same order as in *supportedBandListEUTRA*.	-
discSupportedProc Indicates the number of processes supported by the UE for sidelink discovery.	-
discSysInfoReporting Indicates whether the UE supports reporting of system information for inter-frequency/PLMN sidelink discovery.	-
dl-256QAM Indicates whether the UE supports 256QAM in DL on the band.	-
dmrs-Enhancements (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode, that for the concerned band combination the DMRS enhancements are different than the value indicated by field *dmrs-Enhancements* in *MIMO-UE-ParametersPerTM*.	-
dmrs-Enhancements (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode whether the UE supports DMRS enhancements for the indicated transmission mode.	TBD
downlinkLAA Presence of the field indicates that the UE supports downlink LAA operation including identification of downlink transmissions on LAA cell(s) for full downlink subframes, decoding of common downlink control signalling on LAA cell(s), CSI feedback for LAA cell(s), RRM measurements on LAA cell(s) based on CRS-based DRS.	-
drb-TypeSCG Indicates whether the UE supports SCG bearer.	-
drb-TypeSplit Indicates whether the UE supports split bearer except for PDCP data transfer in UL.	-
dtm Indicates whether the UE supports DTM in GERAN.	-
e-CSFB-1XRTT Indicates whether the UE supports enhanced CS fallback to CDMA2000 1xRTT or not.	Yes
e-CSFB-ConcPS-Mob1XRTT Indicates whether the UE supports concurrent enhanced CS fallback to CDMA2000 1xRTT and PS handover/ redirection to CDMA2000 HRPD.	Yes

DAINGEAN_0002254

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
e-CSFB-dual-1XRTT Indicates whether the UE supports enhanced CS fallback to CDMA2000 1xRTT for dual Rx/Tx configuration. This bit can only be set to supported if *tx-Config1XRTT* and *rx-Config1XRTT* are both set to dual.	Yes
e-HARQ-Pattern-FDD Indicates whether the UE supports enhanced HARQ pattern for TTI bundling operation for FDD.	-
endingDwPTS Indicates whether the UE supports reception ending with a subframe occupied for a DwPTS-duration as described in TS 36.211 [21] and TS 36.213 [23]. This field can be included only if *downlinkLAA* is included.	-
Enhanced-4TxCodebook Indicates whether the UE supports enhanced 4Tx codebook.	No
enhancedDualLayerTDD Indicates whether the UE supports enhanced dual layer (PDSCH transmission mode 8) for TDD or not.	-
ePDCCH Indicates whether the UE can receive DCI on UE specific search space on Enhanced PDCCH.	Yes
e-RedirectionUTRA	Yes
e-RedirectionUTRA-TDD Indicates whether the UE supports enhanced redirection to UTRA TDD to multiple carrier frequencies both with and without using related SIB provided by *RRCConnectionRelease* or not.	Yes
extendedFreqPriorities Indicates whether the UE supports extended E-UTRA frequency priorities indicated by *cellReselectionSubPriority* field.	-
extendedLongDRX Indicates whether the UE supports extended long DRX cycle values of 5.12s and 10.24s in RRC_CONNECTED.	-
extendedMaxMeasId Indicates whether the UE supports extended number of measurement identies as defined by *maxMeasId-r12*.	No
extendedMaxObjectId Indicates whether the UE supports extended number of measurement object identies as defined by *maxObjectId-r13*.	No
extended-RLC-LI-Field Indicates whether the UE supports 15 bit RLC length indicator.	-
extendedRLC-SN-SO-Field Indicates whether the UE supports 16 bits of RLC sequence number and segmentation offset.	-
extendedRSRQ-LowerRange Indicates whether the UE supports the extended RSRQ lower value range from -34dB to -19.5dB in measurement configuration and reporting as specified in TS 36.133 [16].	No
fdd-HARQ-TimingTDD Indicates whether UE supports FDD HARQ timing for TDD SCell when configured with TDD PCell.	-
featureGroupIndicators, featureGroupIndRel9Add, featureGroupIndRel10 The definitions of the bits in the bit string are described in Annex B.1 (for *featureGroupIndicators* and *featureGroupIndRel9Add*) and in Annex C.1.(for *featureGroupIndRel10*)	Yes
fourLayerTM3-TM4 Indicates whether the UE supports 4-layer spatial multiplexing for TM3 and TM4.	-
fourLayerTM3-TM4-perCC Indicates whether the UE supports 4-layer spatial multiplexing for TM3 and TM4 for the component carrier.	-
freqBandPriorityAdjustment Indicates whether the UE supports the prioritization of frequency bands in *multiBandInfoList* over the band in *freqBandIndicator* as defined by *freqBandIndicatorPriority-r12*.	-
freqBandRetrieval Indicates whether the UE supports reception of *requestedFrequencyBands*.	-
halfDuplex If *halfDuplex* is set to true, only half duplex operation is supported for the band, otherwise full duplex operation is supported.	-
incMonEUTRA Indicates whether the UE supports increased number of E-UTRA carrier monitoring in RRC_IDLE and RRC_CONNECTED, as specified in TS 36.133 [16].	No

DAINGEAN_0002255

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
incMonUTRA Indicates whether the UE supports increased number of UTRA carrier monitoring in RRC_IDLE and RRC_CONNECTED, as specified in TS 36.133 [16].	No
inDeviceCoexInd Indicates whether the UE supports in-device coexistence indication as well as autonomous denial functionality.	Yes
inDeviceCoexInd-UL-CA Indicates whether the UE supports UL CA related in-device coexistence indication. This field can be included only if *inDeviceCoexInd* is included. The UE supports *inDeviceCoexInd-UL-CA* in the same duplexing modes as it supports *inDeviceCoexInd*.	-
interBandTDD-CA-WithDifferentConfig Indicates whether the UE supports inter-band TDD carrier aggregation with different UL/DL configuration combinations. The first bit indicates UE supports the configuration combination of SCell DL subframes are a subset of PCell and PSCell by SIB1 configuration and the configuration combination of SCell DL subframes are a superset of PCell and PSCell by SIB1 configuration; the second bit indicates UE supports the configuration combination of SCell DL subframes are neither superset nor subset of PCell and PSCell by SIB1 configuration. This field is included only if UE supports inter-band TDD carrier aggregation.	-
interferenceMeasRestriction Indicates whether the UE supports interference measurement restriction.	TBD
interFreqBandList One entry corresponding to each supported E-UTRA band listed in the same order as in *supportedBandListEUTRA*.	-
interFreqNeedForGaps Indicates need for measurement gaps when operating on the E-UTRA band given by the entry in *bandListEUTRA or on the E-UTRA band combination given by the entry in bandCombinationListEUTRA* and measuring on the E-UTRA band given by the entry in *interFreqBandList*.	-
interFreqProximityIndication Indicates whether the UE supports proximity indication for inter-frequency E-UTRAN CSG member cells.	-
interFreqRSTD-Measurement Indicates whether the UE supports inter-frequency RSTD measurements for OTDOA positioning [54].	Yes
interFreqSI-AcquisitionForHO Indicates whether the UE supports, upon configuration of si-RequestForHO by the network, acquisition and reporting of relevant information using autonomous gaps by reading the SI from a neighbouring inter-frequency cell.	Yes
interRAT-BandList One entry corresponding to each supported band of another RAT listed in the same order as in the *interRAT-Parameters*.	-
interRAT-NeedForGaps Indicates need for DL measurement gaps when operating on the E-UTRA band given by the entry in *bandListEUTRA or on the E-UTRA band combination given by the entry in bandCombinationListEUTRA* and measuring on the inter-RAT band given by the entry in the *interRAT-BandList*.	-
interRAT-ParametersWLAN Indicates whether the UE supports WLAN measurements configured by *MeasObjectWLAN* with corresponding quantity and report configuration in the supported WLAN bands.	-
interRAT-PS-HO-ToGERAN Indicates whether the UE supports inter-RAT PS handover to GERAN or not.	Yes
intraBandContiguousCC-InfoList Indicates, per serving carrier of which the corresponding bandwidth class includes multiple serving carriers (i.e. bandwidth class B, C, D and so on), the maximum number of supported layers for spatial multiplexing in DL and the maximum number of CSI processes supported. The number of entries is equal to the number of component carriers in the corresponding bandwidth class. The UE shall support the setting indicated in each entry of the list regardless of the order of entries in the list.The UE shall include the field only if it supports 4-layer spatial multiplexing in transmission mode3/4 for a subset of component carriers in the corresponding bandwidth class, or if the maximum number of supported layers for at least one component carrier is higher than *supportedMIMO-CapabilityDL-r10* in the corresponding bandwidth class, or if the number of CSI processes for at least one component carrier is higher than *supportedCSI-Proc-r11* in the corresponding band.	-
intraFreqA3-CE-ModeA Indicates whether the UE when operating in CE Mode A supports *eventA3* for intra-frequency neighbouring cells.	-

DAINGEAN_0002256

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
intraFreqA3-CE-ModeB Indicates whether the UE when operating in CE Mode B supports *eventA3* for intra-frequency neighbouring cells.	-
intraFreq-CE-NeedForGaps Indicates need for measurement gaps when operating in CE on the E-UTRA band given by the entry in *supportedBandListEUTRA*.	
intraFreqHO-CE-ModeA Indicates whether the UE when operating in CE Mode A supports intra-frequency handover.	-
intraFreqHO-CE-ModeB Indicates whether the UE when operating in CE Mode B supports intra-frequency handover.	-
intraFreqProximityIndication Indicates whether the UE supports proximity indication for intra-frequency E-UTRAN CSG member cells.	-
intraFreqSI-AcquisitionForHO Indicates whether the UE supports, upon configuration of si-RequestForHO by the network, acquisition and reporting of relevant information using autonomous gaps by reading the SI from a neighbouring intra-frequency cell.	Yes
k-Max (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode the maximum number of NZP CSI RS resource configurations supported within a CSI process applicable for the concerned band combination.	-
k-Max (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode the maximum number of NZP CSI RS resource configurations supported within a CSI process applicable for band combinations for which the concerned capabilities are not signalled.	TBD
loggedMBSFNMeasurements Indicates whether the UE supports logged measurements for MBSFN. A UE indicating support for logged measurements for MBSFN shall also indicate support for logged measurements in Idle mode.	-
loggedMeasurementsIdle Indicates whether the UE supports logged measurements in Idle mode.	-
logicalChannelSR-ProhibitTimer Indicates whether the UE supports the *logicalChannelSR-ProhibitTimer* as defined in TS 36.321 [6].	-
longDRX-Command Indicates whether the UE supports Long DRX Command MAC Control Element.	-
lwa Indicates whether the UE supports LTE-WLAN Aggregation (LWA).	-
lwa-BufferSize Indicates whether the UE supports the layer 2 buffer sizes for "with support for split bearers" as defined in Table 4.1-3 and 4.1A-3 of TS 36.306 [5] for LWA.	-
lwa-SplitBearer Indicates whether the UE supports the split LWA bearer (as defined in TS 36.300 [9]).	-
lwip Indicates whether the UE supports LTE/WLAN Radio Level Integration with IPsec Tunnel (LWIP).	-
maximumCCsRetrieval Indicates whether UE supports reception of *requestedMaxCCsDL* and *requestedMaxCCsUL*.	-
maxNumberDecoding Indicates the maximum number of blind decodes in UE-specific search space per UE in one subframe for CA with more than 5 CCs as defined in TS 36.213 [23] which is supported by the UE. The number of blind decodes supported by the UE is the field value * 32. Only values 5 to 32 can be used in this version of the specification.	No
maxNumberROHC-ContextSessions Set to the maximum number of concurrently active ROHC contexts supported by the UE, excluding context sessions that leave all headers uncompressed. cs2 corresponds with 2 (context sessions), cs4 corresponds with 4 and so on. The network ignores this field if the UE supports none of the ROHC profiles in *supportedROHC-Profiles*.	-
maxNumberUpdatedCSI-Proc Indicates the maximum number of CSI processes to be updated across CCs.	No

DAINGEAN_0002257

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
mbms-AsyncDC Indicates whether the UE in RRC_CONNECTED supports MBMS reception via MRB on a frequency indicated in an *MBMSInterestIndication* message, where (according to *supportedBandCombination*) the carriers that are or can be configured as serving cells in the MCG and the SCG are not synchronized. If this field is included, the UE shall also include *mbms-SCell* and *mbms-NonServingCell*.	TBD
mbms-NonServingCell Indicates whether the UE in RRC_CONNECTED supports MBMS reception via MRB on a frequency indicated in an *MBMSInterestIndication* message, where (according to *supportedBandCombination* and to network synchronization properties) a serving cell may be additionally configured. If this field is included, the UE shall also include the *mbms-SCell* field.	Yes
mbms-SCell Indicates whether the UE in RRC_CONNECTED supports MBMS reception via MRB on a frequency indicated in an *MBMSInterestIndication* message, when an SCell is configured on that frequency (regardless of whether the SCell is activated or deactivated).	Yes
mfbi-UTRA It indicates if the UE supports the signalling requirements of multiple radio frequency bands in a UTRA FDD cell, as defined in TS 25.307 [65].	-
MIMO-BeamformedCapabilityList A list of pairs of {k-Max, n-MaxList} values with the nth entry indicating the values that the UE supports for each CSI process in case n CSI processes would be configured.	-
MIMO-CapabilityDL The number of supported layers for spatial multiplexing in DL. The field may be absent for category 0 and category 1 UE in which case the number of supported layers is 1.	-
MIMO-CapabilityUL The number of supported layers for spatial multiplexing in UL. Absence of the field means that the number of supported layers is 1.	-
MIMO-CA-ParametersPerBoBC A set of MIMO parameters provided per band of a band combination. In case a subfield is absent, the concerned capabilities are the same as indicated at the per UE level (i.e. by MIMO-UE-ParametersPerTM).	-
modifiedMPR-Behavior Field encoded as a bit map, where at least one bit N is set to "1" if UE supports modified MPR/A-MPR behaviour N, see TS 36.101 [42]. All remaining bits of the field are set to "0". The leading / leftmost bit (bit 0) corresponds to modified MPR/A-MPR behaviour 0, the next bit corresponds to modified MPR/A-MPR behaviour 1 and so on. Absence of this field means that UE does not support any modified MPR/A-MPR behaviour.	-
multiACK-CSIreporting Indicates whether the UE supports multi-cell HARQ ACK and periodic CSI reporting and SR on PUCCH format 3.	Yes
multiBandInfoReport Indicates whether the UE supports the acquisition and reporting of multi band information for *reportCGI*.	-
multiClusterPUSCH-WithinCC	Yes
multiNS-Pmax Indicates whether the UE supports the mechanisms defined for cells broadcasting *NS-PmaxList*.	-
multipleTimingAdvance Indicates whether the UE supports multiple timing advances for each band combination listed in *supportedBandCombination*. If the band combination comprised of more than one band entry (i.e., inter-band or intra-band non-contiguous band combination), the field indicates that the same or different timing advances on different band entries are supported. If the band combination comprised of one band entry (i.e., intra-band contiguous band combination), the field indicates that the same or different timing advances across component carriers of the band entry are supported.	-

DAINGEAN_0002258

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
naics-Capability-List Indicates that UE supports NAICS, i.e. receiving assistance information from serving cell and using it to cancel or suppress interference of neighbouring cell(s) for at least one band combination. If not present, UE does not support NAICS for any band combination. The field *numberOfNAICS-CapableCC* indicates the number of component carriers where the NAICS processing is supported and the field *numberOfAggregatedPRB* indicates the maximum aggregated bandwidth across these of component carriers (expressed as a number of PRBs) with the restriction that NAICS is only supported over the full carrier bandwidth. The UE shall indicate the combination of {*numberOfNAICS-CapableCC, numberOfNAICS-CapableCC*} for every supported *numberOfNAICS-CapableCC*, e.g. if a UE supports {x CC, y PRBs} and {x-n CC, y-m PRBs} where n>=1 and m>=0, the UE shall indicate both. - For *numberOfNAICS-CapableCC* = 1, UE signals one value for *numberOfAggregatedPRB* from the range {50, 75, 100}; - For *numberOfNAICS-CapableCC* = 2, UE signals one value for *numberOfAggregatedPRB* from the range {50, 75, 100, 125, 150, 175, 200}; - For *numberOfNAICS-CapableCC* = 3, UE signals one value for *numberOfAggregatedPRB* from the range {50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300}; - For *numberOfNAICS-CapableCC* = 4, UE signals one value for *numberOfAggregatedPRB* from the range {50, 100, 150, 200, 250, 300, 350, 400}; For *numberOfNAICS-CapableCC* = 5, UE signals one value for *numberOfAggregatedPRB* from the range {50, 100, 150, 200, 250, 300, 350, 400, 450, 500}.	-
n-MaxList (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode the maximum number of NZP CSI RS ports supported within a CSI process applicable for band combinations for which the concerned capabilities are not signalled. For *k-Max* values exceeding 1, the UE shall include the field and signal *k-Max* minus 1 bits. The first bit indicates *n-Max2*, with value 0 indicating 8 and value 1 indicating 16. The second bit indicates *n-Max3*, with value 0 indicating 8 and value 1 indicating 16. The third bit indicates *n-Max4*, with value 0 indicating 8 and value 1 indicating 32. The fourth bit indicates *n-Max5*, with value 0 indicating 16 and value 1 indicating 32. The fifth bit indicates *n-Max6*, with value 0 indicating 16 and value 1 indicating 32. The sixt bit indicates *n-Max7*, with value 0 indicating 16 and value 1 indicating 32. The seventh bit indicates *n-Max8*, with value 0 indicating 16 and value 1 indicating 64.	TBD
n-MaxList (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode the maximum number of NZP CSI RS ports supported within a CSI process applicable for band the concerned combination. Further details are as indicated for *n-MaxList* in *MIMO-UE-ParametersPerTM*.	-
NonContiguousUL-RA-WithinCC-List One entry corresponding to each supported E-UTRA band listed in the same order as in *supportedBandListEUTRA*.	No
nonPrecoded (in MIMO-UE-ParametersPerTM) Indicates for a particular transmission mode the UE capabilities concerning non-precoded EBF/ FD-MIMO operation (class A) for band combinations for which the concerned capabilities are not signalled.	TBD
nonPrecoded (in MIMO-CA-ParametersPerBoBCPerTM) If signalled, the field indicates for a particular transmission mode, the UE capabilities concerning non-precoded EBF/ FD-MIMO operation (class A) applicable for the concerned band combination.	-
noResourceRestrictionForTTIBundling Indicate wheter the UE supports TTI bundling operation without resource allocation restriction.	-
otdoa-UE-Assisted Indicates whether the UE supports UE-assisted OTDOA positioning [54].	Yes
pdcch-CandidateReductions Indicates whether the UE supports PDCCH candidate reduction on UE specific search space as specified in TS 36.213 [23, 9.1.1].	No
pdcp-SN-Extension Indicates whether the UE supports 15 bit length of PDCP sequence number.	-
pdcp-SN-Extension-18bits Indicates whether the UE supports 18 bit length of PDCP sequence number.	-
pdcp-TransferSplitUL Indicates whether the UE supports PDCP data transfer split in UL for the *drb-TypeSplit* as specified in TS 36.323 [8].	-
pdsch-CollisionHandling Indicates whether the UE supports PDSCH collision handling as specified in TS 36.213 [23].	-
phy-TDD-ReConfig-FDD-PCell	-

DAINGEAN_0002259

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
Indicates whether the UE supports TDD UL/DL reconfiguration for TDD serving cell(s) via monitoring PDCCH with eIMTA-RNTI on a FDD PCell, and HARQ feedback according to UL and DL HARQ reference configurations. This bit can only be set to supported only if the UE supports FDD PCell and *phy-TDD-ReConfig-TDD-PCell* is set to supported.	
phy-TDD-ReConfig-TDD-PCell Indicates whether the UE supports TDD UL/DL reconfiguration for TDD serving cell(s) via monitoring PDCCH with eIMTA-RNTI on a TDD PCell, and HARQ feedback according to UL and DL HARQ reference configurations, and PUCCH format 3.	-
pmi-Disabling	Yes
powerPrefInd Indicates whether the UE supports power preference indication.	No
pucch-Format4 Indicates whether the UE supports PUCCH format 4.	Yes
pucch-Format5 Indicates whether the UE supports PUCCH format 5.	Yes
pucch-SCell Indicates whether the UE supports PUCCH on SCell.	No
pusch-FeedbackMode Indicates whether the UE supports PUSCH feedback mode 3-2.	No
pusch-SRS-PowerControl-SubframeSet Indicates whether the UE supports subframe set dependent UL power control for PUSCH and SRS. This field is only applicable for UEs supporting TDD.	-
rach-Report Indicates whether the UE supports delivery of rachReport.	-
rclwi Indicates whether the UE supports RCLWI, i.e. reception of *rclwi-Configuration*. The UE which supports RLCWI shall also indicate support of *interRAT-ParametersWLAN-r13*. The UE which supports RCLWI and *wlan-IW-RAN-Rules* shall also support applying WLAN identifiers received in *rclwi-Configuration* for the access network selection and traffic steering rules when in RRC_IDLE.	-
reducedIntNonContComb Indicates whether the UE supports receiving *requestReducedIntNonContComb* that requests the UE to exclude supported intra-band non-contiguous CA band combinations other than included in capability signalling as specified in TS 36.306 [5, 4.3.5.21].	-
reducedIntNonContCombRequested Indicates that the UE excluded supported intra-band non-contiguous CA band combinations other than included in capability signalling as specified in TS 36.306 [5, 4.3.5.21].	-
requestedBands Indicates the frequency bands requested by E-UTRAN.	-
requestedCCsDL, requestedCCsUL Indicates the maximum number of CCs requested by E-UTRAN.	-
rsrqMeasWideband Indicates whether the UE can perform RSRQ measurements with wider bandwidth.	Yes
rsrq-OnAllSymbols Indicates whether the UE can perform RSRQ measurement on all OFDM symbols and also support the extended RSRQ upper value range from -3dB to 2.5dB in measurement configuration and reporting as specified in TS 36.133 [16].	No
rs-SINR-Meas Indicates whether the UE can perform RS-SINR measurements in RRC_CONNECTED as specified in TS 36.214 [48].	-
rssi-AndChannelOccupancyReporting Indicates whether the UE supports performing measurements and reporting of RSSI and channel occupancy. This field can be included only if *downlinkLAA* is included.	-
scptm-AsyncDC Indicates whether the UE in RRC_CONNECTED supports MBMS reception via SC-MRB on a frequency indicated in an *MBMSInterestIndication* message, where (according to *supportedBandCombination*) the carriers that are or can be configured as serving cells in the MCG and the SCG are not synchronized. If this field is included, the UE shall also include *scptm-SCell* and *scptm-NonServingCell*.	Yes
scptm-NonServingCell Indicates whether the UE in RRC_CONNECTED supports MBMS reception via SC-MRB on a frequency indicated in an *MBMSInterestIndication* message, where (according to *supportedBandCombination* and to network synchronization properties) a serving cell may be additionally configured. If this field is included, the UE shall also include the *scptm-SCell* field.	Yes

DAINGEAN_0002260

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
scptm-Parameters Presence of the field indicates that the UE supports SC-PTM reception as specified in TS 36.306 [5].	Yes
scptm-SCell Indicates whether the UE in RRC_CONNECTED supports MBMS reception via SC-MRB on a frequency indicated in an *MBMSInterestIndication* message, when an SCell is configured on that frequency (regardless of whether the SCell is activated or deactivated).	Yes
scptm-ParallelReception Indicates whether the UE in RRC_CONNECTED supports parallel reception in the same subframe of DL-SCH transport blocks transmitted using C-RNTI/Semi-Persistent Scheduling C-RNTI and using SC-RNTI/G-RNTI as specified in TS 36.306 [5].	Yes
secondSlotStartingPosition Indicates whether the UE supports reception of subframes with second slot starting position as described in TS 36.211 [21] and TS 36.213 [23]. This field can be included only if *downlinkLAA* is included.	-
simultaneousPUCCH-PUSCH	Yes
simultaneousRx-Tx Indicates whether the UE supports simultaneous reception and transmission on different bands for each band combination listed in *supportedBandCombination*. This field is only applicable for inter-band TDD band combinations. A UE indicating support of *simultaneousRx-Tx* and *dc-Support-r12* shall support different UL/DL configurations between PCell and PSCell.	-
skipFallbackCombinations Indicates whether UE supports receiving reception of *skipFallbackCombinations* that requests UE to exclude fallback band combinations from capability signalling.	-
skipFallbackCombRequested Indicates whether *requestSkipFallbackCombinations* is requested by E-UTRAN.	-
skipMonitoringDCI-Format0-1A Indicates whether UE supports blind decoding reduction on UE specific search space by not monitoring DCI Format 0 and 1A as specified in TS 36.213 [23, 9.1.1].	No
spatialBundling-HARQ-ACK Indicates whether UE supports HARQ-ACK spatial bundling on PUCCH or PUSCH as specified in TS 36.213 [23, 7.3.1 and 7.3.2].	No
srs-Enhancements Indicates whether the UE supports SRS enhancements.	TBD
srs-EnhancementsTDD Indicates whether the UE supports TDD specific SRS enhancements.	No
srvcc-FromUTRA-FDD-ToGERAN Indicates whether UE supports SRVCC handover from UTRA FDD PS HS to GERAN CS.	-
srvcc-FromUTRA-FDD-ToUTRA-FDD Indicates whether UE supports SRVCC handover from UTRA FDD PS HS to UTRA FDD CS.	-
srvcc-FromUTRA-TDD128-ToGERAN Indicates whether UE supports SRVCC handover from UTRA TDD 1.28Mcps PS HS to GERAN CS.	-
srvcc-FromUTRA-TDD128-ToUTRA-TDD128 Indicates whether UE supports SRVCC handover from UTRA TDD 1.28Mcps PS HS to UTRA TDD 1.28Mcps CS.	-
ss-CCH-InterfHandl Indicates whether the UE supports synchronisation signal and common channel interference handling.	Yes
standaloneGNSS-Location Indicates whether the UE is equipped with a standalone GNSS receiver that may be used to provide detailed location information in RRC measurement report and logged measurements.	-
supportedBandCombination Includes the supported CA band combinations, if any, and may include all the supported non-CA bands.	-
supportedBandCombinationAdd-r11 Includes additional supported CA band combinations in case maximum number of CA band combinations of *supportedBandCombination* is exceeded.	-
SupportedBandCombinationAdd-v11d0, SupportedBandCombinationAdd-v1250, SupportedBandCombinationAdd-v1270, SupportedBandCombinationAdd-v1320 If included, the UE shall include the same number of entries, and listed in the same order, as in *SupportedBandCombinationAdd-r11*.	-
SupportedBandCombinationExt, SupportedBandCombination-v1090, SupportedBandCombination-v10i0, SupportedBandCombination-v1130, SupportedBandCombination-v1250, SupportedBandCombination-v1270,	-

DAINGEAN_0002261

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
SupportedBandCombination-v1320 If included, the UE shall include the same number of entries, and listed in the same order, as in *supportedBandCombination-r10*.	
supportedBandCombinationReduced Includes the supported CA band combinations, and may include the fallback CA combinations specified in TS 36.101 [42, 4.3A]. This field also indicates whether the UE supports reception of *requestReducedFormat*.	
SupportedBandCombinationReduced-v1320 If included, the UE shall include the same number of entries, and listed in the same order, as in *supportedBandCombinationReduced-r13*.	-
SupportedBandGERAN GERAN band as defined in TS 45.005 [20].	No
SupportedBandList1XRTT One entry corresponding to each supported CDMA2000 1xRTT band class.	-
SupportedBandListEUTRA Includes the supported E-UTRA bands. This field shall include all bands which are indicated in *BandCombinationParameters*.	-
SupportedBandListEUTRA-v9e0, SupportedBandListEUTRA-v1250, SupportedBandListEUTRA-v1310, SupportedBandListEUTRA-v1320 If included, the UE shall include the same number of entries, and listed in the same order, as in *supportedBandListEUTRA* (i.e. without suffix).	-
SupportedBandListGERAN	No
SupportedBandListHRPD One entry corresponding to each supported CDMA2000 HRPD band class.	-
supportedBandListWLAN Indicates the supported WLAN bands by the UE.	-
SupportedBandUTRA-FDD UTRA band as defined in TS 25.101 [17].	-
SupportedBandUTRA-TDD128 UTRA band as defined in TS 25.102 [18].	-
SupportedBandUTRA-TDD384 UTRA band as defined in TS 25.102 [18].	-
SupportedBandUTRA-TDD768 UTRA band as defined in TS 25.102 [18].	-
supportedBandwidthCombinationSet The *supportedBandwidthCombinationSet* indicated for a band combination is applicable to all bandwidth classes indicated by the UE in this band combination. Field encoded as a bit map, where bit N is set to "1" if UE support Bandwidth Combination Set N for this band combination, see 36.101 [42]. The leading / leftmost bit (bit 0) corresponds to the Bandwidth Combination Set 0, the next bit corresponds to the Bandwidth Combination Set 1 and so on. The UE shall neither include the field for a non-CA band combination, nor for a CA band combination for which the UE only supports Bandwidth Combination Set 0.	-
supportedCellGrouping This field indicates for which mapping of serving cells to cell groups (i.e. MCG or SCG) the UE supports asynchronous DC. This field is only present for a band combination with more than two but less than six band entries where the UE supports asynchronous DC. If this field is not present but asynchronous operation is supported, the UE supports all possible mappings of serving cells to cell groups for the band combination. The bitmap size is selected based on the number of entries in the combinations, i.e., in case of three entries, the bitmap corresponding to *threeEntries* is selected and so on. A bit in the bit string set to 1 indicates that the UE supports asynchronous DC for the cell grouping option represented by the concerned bit position. Each bit position represents a different cell grouping option, as illustrated by a table, see NOTE 5. A cell grouping option is represented by a number of bits, each representing a particular band entry in the band combination with the left-most bit referring to the band listed first in the band combination, etc. Value 0 indicates that the carriers of the corresponding band entry are mapped to a first cell group, while value 1 indicates that the carriers of the corresponding band entry are mapped to a second cell group. It is noted that the mapping table does not include entries with all bits set to the same value (0 or 1) as this does not represent a DC scenario (i.e. indicating that the UE supports that all carriers of the corresponding band entry are in one cell group).	-
supportedCSI-Proc Indicates the maximum number of CSI processes supported on a component carrier within a band. Value n1 corresponds to 1 CSI process, value n3 corresponds to 3 CSI processes, and value n4 corresponds to 4 CSI processes. If this field is included, the UE shall include the same number of entries listed in the same order as in *BandParameters*. If the UE supports at least 1	-

DAINGEAN_0002262

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
CSI process on any component carrier, then the UE shall include this field in all bands in all band combinations.	
supportedNAICS-2CRS-AP If included, the UE supports NAICS for the band combination. The UE shall include a bitmap of the same length, and in the same order, as in *naics-Capability-List,* to indicate 2 CRS AP NAICS capability of the band combination. The first/ leftmost bit points to the first entry of *naics-Capability-List*, the second bit points to the second entry of *naics-Capability-List*, and so on. For band combinations with a single component carrier, UE is only allowed to indicate {*numberOfNAICS-CapableCC*, *numberOfAggregatedPRB*} = {1, 100} if NAICS is supported.	-
supportRohcContextContinue Indicates whether the UE supports ROHC context continuation operation where the UE does not reset the current ROHC context upon handover.	-
tdd-SpecialSubframe Indicates whether the UE supports TDD special subframe defined in TS 36.211 [21].	No
tdd-FDD-CA-PCellDuplex The presence of this field indicates that the UE supports TDD/FDD CA in any supported band combination including at least one FDD band with *bandParametersUL* and at least one TDD band with *bandParametersUL*. The first bit is set to "1" if UE supports the TDD PCell. The second bit is set to "1" if UE supports FDD PCell. This field is included only if the UE supports band combination including at least one FDD band with *bandParametersUL* and at least one TDD band with *bandParametersUL*. If this field is included, the UE shall set at least one of the bits as "1". If this field is included with DC, then it is applicable within a CG, and the presence of this field indicates the capability of the UE to support TDD/FDD CA with at least one FDD band and at least one TDD band in the same CG, with the value indicating the support for TDD/FDD PCell (PSCell).	-
timerT312 Indicates whether the UE supports T312.	No
tm5-FDD Indicates whether the UE supports the PDSCH transmission mode 5 in FDD.	-
tm5-TDD Indicates whether the UE supports the PDSCH transmission mode 5 in TDD.	-
tm9-LAA Indicates whether the UE supports tm9 operation on LAA cell(s). This field can be included only if *downlinkLAA* is included.	-
tm9-With-8Tx-FDD	No
tm10-LAA Indicates whether the UE supports tm10 operation on LAA cell(s). This field can be included only if *downlinkLAA* is included.	-
twoAntennaPortsForPUCCH	No
txDiv-PUCCH1b-ChSelect Indicates whether the UE supports transmit diversity for PUCCH format 1b with channel selection.	Yes
uci-PUSCH-Ext Indicates whether the UE supports an extension of UCI delivering more than 22 HARQ-ACK bits on PUSCH as specified in TS 36.212 [22, 5.2.2.6] and TS 36.213 [23, 8.6.3].	No
ue-Category UE category as defined in TS 36.306 [5]. Set to values 1 to 12 in this version of the specification.	-
ue-CategoryDL UE DL category as defined in TS 36.306 [5]. For ASN.1 compatibility, a UE indicating DL category 0 or m1 shall also indicate any of the categories (1..5) in *ue-Category* (without suffix), which is ignored by the eNB. The field *ue-CategoryDL* is set to values m1, 0, 6, 7, 9 to 17 in this version of the specification.	-
ue-CategoryUL UE UL category as defined in TS 36.306 [5]. The field *ue-CategoryUL* is set to values m1, 0, 3, 5, 7, 8, 13 or 14 in this version of the specification.	-
ue-PowerClass-N, ue-PowerClass-5 Indicates whether the UE supports UE power class 1, 2, 4 or 5 in the E-UTRA band, see TS 36.101 [42]. UE includes either *ue-PowerClass-N* or *ue-PowerClass-5*. If neither *ue-PowerClass-N* nor *ue-PowerClass-5* is included, UE supports the default UE power class in the E-UTRA band, see TS 36.101 [42].	-
ue-Rx-TxTimeDiffMeasurements Indicates whether the UE supports Rx - Tx time difference measurements.	No
ue-SpecificRefSigsSupported	No

DAINGEAN_0002263

UE-EUTRA-Capability field descriptions	*FDD/ TDD diff*
ue-SSTD-Meas Indicates whether the UE supports SSTD measurements between the PCell and the PSCell as specified in TS 36.214 [48] and TS 36.133 [16].	-
ue-TxAntennaSelectionSupported TRUE indicates that the UE is capable of supporting UE transmit antenna selection as described in TS 36.213 [23, 8.7].	Yes
ul-CoMP Indicates whether the UE supports UL Coordinated Multi-Point operation.	No
utran-ProximityIndication Indicates whether the UE supports proximity indication for UTRAN CSG member cells.	-
ul-64QAM Indicates whether the UE supports 64QAM in UL on the band. This field is only present when the field ue-*CategoryUL* is set to 5, 8, 13 or 14. If the field is present for one band, the field shall be present for all bands including downlink only bands.	-
ul-PDCP-Delay Indicates whether the UE supports UL PDCP Packet Delay per QCI measurement as specified in TS 36.314 [71].	-
utran-SI-AcquisitionForHO Indicates whether the UE supports, upon configuration of si-RequestForHO by the network, acquisition and reporting of relevant information using autonomous gaps by reading the SI from a neighbouring UMTS cell.	Yes
voiceOverPS-HS-UTRA-FDD Indicates whether UE supports IMS voice according to GSMA IR.58 profile in UTRA FDD.	-
voiceOverPS-HS-UTRA-TDD128 Indicates whether UE supports IMS voice in UTRA TDD 1.28Mcps.	-
whiteCellList Indicates whether the UE supports EUTRA white cell listing to limit the set of cells applicable for measurements.	-
wlan-IW-RAN-Rules Indicates whether the UE supports RAN-assisted WLAN interworking based on access network selection and traffic steering rules.	-
wlan-IW-ANDSF-Policies Indicates whether the UE supports RAN-assisted WLAN interworking based on ANDSF policies.	-
wlan-MAC-Address Indicates the WLAN MAC address of this UE.	-

NOTE 1: The IE *UE-EUTRA-Capability* does not include AS security capability information, since these are the same as the security capabilities that are signalled by NAS. Consequently AS need not provide "man-in-the-middle" protection for the security capabilities.

NOTE 2: The column FDD/ TDD diff indicates if the UE is allowed to signal, as part of the additional capabilities for an XDD mode i.e. within *UE-EUTRA-CapabilityAddXDD-Mode-xNM*, a different value compared to the value signalled elsewhere within *UE-EUTRA-Capability* (i.e. the common value, supported for both XDD modes). A '-' is used to indicate that it is not possible to signal different values (used for fields for which the field description is provided for other reasons). Annex E specifies for which TDD and FDD serving cells a UE supporting TDD/FDD CA shall support a capability for which it indicates support within the capability signalling.

NOTE 3: All the combinations of *CA-MIMO-ParametersUL* and *CA-MIMO-ParametersDL* for one band and across all the bands in each *BandCombinationParameters* are supported by the UE and have the same measurement gap requirement (i.e. the same *BandInfoEUTRA* applies). The *BandCombinationParameters* for the same band combination can be included more than once.

NOTE 4: UE CA and measurement capabilities indicate the combinations of frequencies that can be configured as serving frequencies.

NOTE 5: The grouping of the cells to the first and second cell group, as indicated by *supportedCellGrouping*, is shown in the table below. The leading / leftmost bit of *supportedCellGrouping* corresponds to the Bit String Position 1.

DAINGEAN_0002264

Nr of Band Entries:	5	4	3
Length of Bit-String:	15	7	3
Bit String Position	Cell grouping option (0= first cell group, 1= second cell group)		
1	00001	0001	001
2	00010	0010	010
3	00011	0011	011
4	00100	0100	
5	00101	0101	
6	00110	0110	
7	00111	0111	
8	01000		
9	01001		
10	01010		
11	01011		
12	01100		
13	01101		
14	01110		
15	01111		

– *UE-RadioPagingInfo*

The *UE-RadioPagingInfo* IE contains UE capability information needed for paging.

UE-RadioPagingInfo information element

```
-- ASN1START

UE-RadioPagingInfo-r12 ::=              SEQUENCE {
    ue-Category-v1250                   INTEGER (0)         OPTIONAL,
    ...,
    [[  ue-CategoryDL-v1310                         ENUMERATED {m1}     OPTIONAL,
        ce-ModeA-r13                                ENUMERATED {true}   OPTIONAL,
        ce-ModeB-r13                                ENUMERATED {true}   OPTIONAL
    ]]

}

-- ASN1STOP
```

UE-RadioPagingInfo field descriptions
ce-ModeA, ce-ModeB   Indicates whether the UE supports operation in CE mode A and/or B, as specified in TS 36.211 [21] and TS 36.213 [23].
ue-Category, ue-CategoryDL   UE category as defined in TS 36.306 [5].

– *UE-TimersAndConstants*

The IE *UE-TimersAndConstants* contains timers and constants used by the UE in either RRC_CONNECTED or RRC_IDLE.

DAINGEAN_0002265

***UE-TimersAndConstants* information element**

```
-- ASN1START

UE-TimersAndConstants ::=           SEQUENCE {
    t300                                ENUMERATED {
                                            ms100, ms200, ms300, ms400, ms600, ms1000, ms1500,
                                            ms2000},
    t301                                ENUMERATED {
                                            ms100, ms200, ms300, ms400, ms600, ms1000, ms1500,
                                            ms2000},
    t310                                ENUMERATED {
                                            ms0, ms50, ms100, ms200, ms500, ms1000, ms2000},
    n310                                ENUMERATED {
                                            n1, n2, n3, n4, n6, n8, n10, n20},
    t311                                ENUMERATED {
                                            ms1000, ms3000, ms5000, ms10000, ms15000,
                                            ms20000, ms30000},
    n311                                ENUMERATED {
                                            n1, n2, n3, n4, n5, n6, n8, n10},
    ...,
    [[  t300-v1310                      ENUMERATED {
                                            ms2500, ms3000, ms3500, ms4000, ms5000, ms6000, ms8000,
                                            ms10000}        OPTIONAL,   -- Need OR
        t301-v1310                      ENUMERATED {
                                            ms2500, ms3000, ms3500, ms4000, ms5000, ms6000, ms8000,
                                            ms10000}        OPTIONAL    -- Need OR
    ]]
}

-- ASN1STOP
```

***UE-TimersAndConstants* field descriptions**
n3xy Constants are described in section 7.4. n1 corresponds with 1, n2 corresponds with 2 and so on.
t3xy Timers are described in section 7.3. Value ms0 corresponds with 0 ms, ms50 corresponds with 50 ms and so on. EUTRAN includes an extended value *t3xy-v1310* only in the Bandwidth Reduced (BR) version of the SIB. UEs that support Coverage Enhancement (CE) mode B shall use the extended value *t3xy-v1310*, if present, and ignore the value signaled by *t3xy* (without the suffix).

– *VisitedCellInfoList*

The IE *VisitedCellInfoList* includes the mobility history information of maximum of 16 most recently visited cells or time spent outside E-UTRA. The most recently visited cell is stored first in the list. The list includes cells visited in RRC_IDLE and RRC_CONNECTED states.

***VisitedCellInfoList* information element**

```
-- ASN1START

VisitedCellInfoList-r12 ::= SEQUENCE (SIZE (1..maxCellHistory-r12)) OF VisitedCellInfo-r12

VisitedCellInfo-r12 ::=             SEQUENCE {
    visitedCellId-r12                   CHOICE {
        cellGlobalId-r12                        CellGlobalIdEUTRA,
        pci-arfcn-r12                           SEQUENCE {
            physCellId-r12                          PhysCellId,
            carrierFreq-r12                         ARFCN-ValueEUTRA-r9
        }
    }                                                               OPTIONAL,
    timeSpent-r12                       INTEGER (0..4095),
    ...
}

-- ASN1STOP
```


DAINGEAN_0002266

***VisitedCellInfoList* field descriptions**

timeSpent
This field indicates the duration of stay in the cell or outside E-UTRA approximated to the closest second. If the duration of stay exceeds 4095s, the UE shall set it to 4095s.

– *WLAN-OffloadConfig*

The IE *WLAN-OffloadConfig* includes information for traffic steering between E-UTRAN and WLAN. The fields are applicable to both RAN-assisted WLAN interworking based on access network selection and traffic steering rules and RAN-assisted WLAN interworking based on ANDSF policies unless stated otherwise in the field description.

***WLAN-OffloadConfig* information element**

```
-- ASN1START

WLAN-OffloadConfig-r12 ::=              SEQUENCE {
    thresholdRSRP-r12                       SEQUENCE {
        thresholdRSRP-Low-r12                   RSRP-Range,
        thresholdRSRP-High-r12                  RSRP-Range
    }                                                               OPTIONAL, -- Need OR
    thresholdRSRQ-r12                       SEQUENCE {
        thresholdRSRQ-Low-r12                   RSRQ-Range,
        thresholdRSRQ-High-r12                  RSRQ-Range
    }                                                               OPTIONAL, -- Need OR
    thresholdRSRQ-OnAllSymbolsWithWB-r12    SEQUENCE {
        thresholdRSRQ-OnAllSymbolsWithWB-Low-r12            RSRQ-Range,
        thresholdRSRQ-OnAllSymbolsWithWB-High-r12           RSRQ-Range
    }                                                               OPTIONAL, -- Need OP
    thresholdRSRQ-OnAllSymbols-r12          SEQUENCE {
         thresholdRSRQ-OnAllSymbolsLow-r12                  RSRQ-Range,
         thresholdRSRQ-OnAllSymbolsHigh-r12                 RSRQ-Range
    }                                                               OPTIONAL, -- Need OP
    thresholdRSRQ-WB-r12                    SEQUENCE {
        thresholdRSRQ-WB-Low-r12                            RSRQ-Range,
        thresholdRSRQ-WB-High-r12                           RSRQ-Range
    }                                                               OPTIONAL, -- Need OP

    thresholdChannelUtilization-r12         SEQUENCE {
        thresholdChannelUtilizationLow-r12      INTEGER (0..255),
        thresholdChannelUtilizationHigh-r12     INTEGER (0..255)
    }                                                               OPTIONAL, -- Need OR
    thresholdBackhaul-Bandwidth-r12         SEQUENCE {
        thresholdBackhaulDL-BandwidthLow-r12    WLAN-backhaulRate-r12,
        thresholdBackhaulDL-BandwidthHigh-r12   WLAN-backhaulRate-r12,
        thresholdBackhaulUL-BandwidthLow-r12    WLAN-backhaulRate-r12,
        thresholdBackhaulUL-BandwidthHigh-r12   WLAN-backhaulRate-r12
    }                                                               OPTIONAL, -- Need OR
    thresholdWLAN-RSSI-r12                      SEQUENCE {
        thresholdWLAN-RSSI-Low-r12                  INTEGER (0..255),
        thresholdWLAN-RSSI-High-r12                 INTEGER (0..255)
    }                                                               OPTIONAL, -- Need OR
    offloadPreferenceIndicator-r12          BIT STRING (SIZE (16))  OPTIONAL, -- Need OR
    t-SteeringWLAN-r12                      T-Reselection           OPTIONAL, -- Need OR
    ...
}

WLAN-backhaulRate-r12 ::=                   ENUMERATED
                                        {r0, r4, r8, r16, r32, r64, r128, r256, r512,
                                        r1024, r2048, r4096, r8192, r16384, r32768, r65536,
r131072,
                                        r262144, r524288, r1048576, r2097152, r4194304, r8388608,
                                        r16777216, r33554432, r67108864, r134217728, r268435456,
                                        r536870912, r1073741824, r2147483648, r4294967296}

-- ASN1STOP
```

***WLAN-OffloadConfig* field descriptions**

offloadPreferenceIndicator
Indicates the offload preference indicator. Parameter: OPI in TS 24.312 [66]. Only applicable to RAN-assisted WLAN interworking based on ANDSF policies.

DAINGEAN_0002267

thresholdBackhaulDLBandwidth-High
Indicates the backhaul available downlink bandwidth threshold used by the UE for traffic steering to WLAN. Parameter: $Thresh_{BackhRateDLWLAN, High}$ in TS 36.304 [4]. Value in kilobits/second. Value rN corresponds to N kbps.

thresholdBackhaulDLBandwidth-Low
Indicates the backhaul available downlink bandwidth threshold used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{BackhRateDLWLAN, Low}$ in TS 36.304 [4]. Value in kilobits/second. Value rN corresponds to N kbps.

thresholdBackhaulULBandwidth-High
Indicates the backhaul available uplink bandwidth threshold used by the UE for traffic steering to WLAN. Parameter: $Thresh_{BackhRateULWLAN, High}$ in TS 36.304 [4]. Value in kilobits/second. Value rN corresponds to N kbps.

thresholdBackhaulULBandwidth-Low
Indicates the backhaul available uplink bandwidth threshold used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{BackhRateULWLAN, Low}$ in TS 36.304 [4]. Value in kilobits/second. Value rN corresponds to N kbps.

thresholdChannelUtilization-High
Indicates the WLAN channel utilization (BSS load) threshold used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{ChUtilWLAN, High}$ in TS 36.304 [4].

thresholdChannelUtilization-Low
Indicates the WLAN channel utilization (BSS load) threshold used by the UE for traffic steering to WLAN. Parameter: $Thresh_{ChUtilWLAN, Low}$ in TS 36.304 [4].

thresholdRSRP-High
Indicates the RSRP threshold (in dBm) used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{ServingOffloadWLAN, HighP}$ in TS 36.304 [4].

thresholdRSRP-Low
Indicates the RSRP threshold (in dBm) used by the UE for traffic steering to WLAN. Parameter: $Thresh_{ServingOffloadWLAN, LowP}$ in TS 36.304 [4].

thresholdRSRQ-High,thresholdRSRQ-OnAllSymbolsHigh, thresholdRSRQ-WB-High, thresholdRSRQ-OnAllSymbolsWithWB-High
Indicates the RSRQ threshold (in dB) used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{ServingOffloadWLAN, HighQ}$ in TS 36.304 [4]. The UE shall only apply one of threshold values of *thresholdRSRQ-OnAllSymbolsWithWB-High, thresholdRSRQ-OnAllSymbolsHigh, thresholdRSRQ-WB-High* and *thresholdRSRQ-High* as present in *wlan-OffloadConfigCommon* and forward this to upper layer. NOTE 1.

thresholdRSRQ-Low,thresholdRSRQ-OnAllSymbolsLow, thresholdRSRQ-WB-Low, thresholdRSRQ-OnAllSymbolsWithWB-Low
Indicates the RSRQ threshold (in dB) used by the UE for traffic steering to WLAN. Parameter: $Thresh_{ServingOffloadWLAN, LowQ}$ in TS 36.304 [4].
The UE shall only apply one of threshold values of *thresholdRSRQ-OnAllSymbolsWithWB-Low, thresholdRSRQ-OnAllSymbolsLow, thresholdRSRQ-WB-Low* and *thresholdRSRQ-Low* as present in *wlan-OffloadConfigCommon* and forward this to upper layer. NOTE 1.

thresholdWLAN-RSSI-High
Indicates the WLAN RSSI threshold used by the UE for traffic steering to WLAN. Parameter: $Thresh_{WLANRSSI, High}$ in TS 36.304 [4]. Value 0 corresponds to -128dBm, 1 corresponds to -127dBm and so on.

thresholdWLAN-RSSI-Low
Indicates the WLAN RSSI threshold used by the UE for traffic steering to E-UTRAN. Parameter: $Thresh_{WLANRSSI, Low}$ in TS 36.304 [4]. Value 0 corresponds to -128dBm, 1 corresponds to -127dBm and so on.

t-SteeringWLAN
Indicates the timer value during which the rules should be fulfilled before starting traffic steering between E-UTRAN and WLAN. Parameter: $Tsteering_{WLAN}$ in TS 36.304 [4]. Only applicable to RAN-assisted WLAN interworking based on access network selection and traffic steering rules.

NOTE 1: Within SIB17, E-UTRAN includes the fields corresponding to same RSRQ types as included in SIB1. E.g. if E-UTRAN includes *q-QualMinRSRQ-OnAllSymbols* in SIB1 it also includes *thresholdRSRQ-OnAllSymbols* in SIB17. Within the *RRCConnectionReconfiguration* message E-UTRAN only includes *thresholdRSRQ*, setting the value according to the RSRQ type used for E-UTRAN. The UE shall apply the RSRQ fields (RSRQ threshold, high and low) corresponding to one RSRQ type i.e. the same as it applies for E-UTRAN.

6.3.7 MBMS information elements

DAINGEAN_0002268

– *MBMS-NotificationConfig*

The IE *MBMS-NotificationConfig* specifies the MBMS notification related configuration parameters, that are applicable for all MBSFN areas.

MBMS-NotificationConfig information element

```
-- ASN1START

MBMS-NotificationConfig-r9 ::=              SEQUENCE {
    notificationRepetitionCoeff-r9      ENUMERATED {n2, n4},
    notificationOffset-r9               INTEGER (0..10),
    notificationSF-Index-r9             INTEGER (1..6)
}

-- ASN1STOP
```

MBMS-NotificationConfig field descriptions
notificationOffset
Indicates, together with the *notificationRepetitionCoeff*, the radio frames in which the MCCH information change notification is scheduled i.e. the MCCH information change notification is scheduled in radio frames for which: SFN mod notification repetition period = *notificationOffset*.
notificationRepetitionCoeff
Actual change notification repetition period common for all MCCHs that are configured= shortest modification period/ *notificationRepetitionCoeff*. The 'shortest modificaton period' corresponds with the lowest value of *mcch-ModificationPeriod* of all MCCHs that are configured. Value n2 corresponds to coefficient 2, and so on.
notificationSF-Index
Indicates the subframe used to transmit MCCH change notifications on PDCCH. FDD: Value 1, 2, 3, 4, 5 and 6 correspond with subframe #1, #2, #3 #6, #7, and #8 respectively. TDD: Value 1, 2, 3, 4, and 5 correspond with subframe #3, #4, #7, #8, and #9 respectively.

– *MBMS-ServiceList*

The IE *MBMS-ServiceList* provides the list of MBMS services which the UE is receiving or interested to receive.

MBMS-ServiceList information element

```
-- ASN1START

MBMS-ServiceList-r13 ::=            SEQUENCE (SIZE (0..maxMBMS-ServiceListPerUE-r13)) OF MBMS-
ServiceInfo-r13

MBMS-ServiceInfo-r13 ::=                SEQUENCE    {
    tmgi-r13                            TMGI-r9
}

-- ASN1STOP
```

– *MBSFN-AreaId*

The IE *MBSFN-AreaId* identifies an MBSFN area by means of a locally unique value at lower layers i.e. it concerns parameter N_{ID}^{MBSFN} in TS 36.211 [21, 6.10.2.1].

MBSFN-AreaId information element

```
-- ASN1START

MBSFN-AreaId-r12 ::=                    INTEGER (0..255)

-- ASN1STOP
```


DAINGEAN_0002269

– *MBSFN-AreaInfoList*

The IE *MBSFN-AreaInfoList* contains the information required to acquire the MBMS control information associated with one or more MBSFN areas.

MBSFN-AreaInfoList information element

```
-- ASN1START

MBSFN-AreaInfoList-r9 ::=           SEQUENCE (SIZE(1..maxMBSFN-Area)) OF MBSFN-AreaInfo-r9

MBSFN-AreaInfo-r9 ::=               SEQUENCE {
    mbsfn-AreaId-r9                     MBSFN-AreaId-r12,
    non-MBSFNregionLength               ENUMERATED {s1, s2},
    notificationIndicator-r9            INTEGER (0..7),
    mcch-Config-r9                      SEQUENCE {
        mcch-RepetitionPeriod-r9            ENUMERATED {rf32, rf64, rf128, rf256},
        mcch-Offset-r9                      INTEGER (0..10),
        mcch-ModificationPeriod-r9          ENUMERATED {rf512, rf1024},
        sf-AllocInfo-r9                     BIT STRING (SIZE(6)),
        signallingMCS-r9                    ENUMERATED {n2, n7, n13, n19}
    },
    ...
}

-- ASN1STOP
```

***MBSFN-AreaInfoList* field descriptions**
mcch-ModificationPeriod
Defines periodically appearing boundaries, i.e. radio frames for which SFN mod *mcch-ModificationPeriod* = 0. The contents of different transmissions of MCCH information can only be different if there is at least one such boundary in-between them.
mcch-Offset
Indicates, together with the *mcch-RepetitionPeriod*, the radio frames in which MCCH is scheduled i.e. MCCH is scheduled in radio frames for which: SFN mod *mcch-RepetitionPeriod* = *mcch-Offset*.
mcch-RepetitionPeriod
Defines the interval between transmissions of MCCH information, in radio frames, Value rf32 corresponds to 32 radio frames, rf64 corresponds to 64 radio frames and so on.
non-MBSFNregionLength
Indicates how many symbols from the beginning of the subframe constitute the non-MBSFN region. This value applies in all subframes of the MBSFN area used for PMCH transmissions as indicated in the MSI. The values s1 and s2 correspond with 1 and 2 symbols, respectively: see TS 36.211 [21, Table 6.7-1].
notificationIndicator
Indicates which PDCCH bit is used to notify the UE about change of the MCCH applicable for this MBSFN area. Value 0 corresponds with the least significant bit as defined in TS 36.212 [22, 5.3.3.1] and so on.
sf-AllocInfo
Indicates the subframes of the radio frames indicated by the *mcch-RepetitionPeriod* and the *mcch-Offset*, that may carry MCCH. Value "1" indicates that the corresponding subframe is allocated. The following mapping applies: FDD: The first/ leftmost bit defines the allocation for subframe #1 of the radio frame indicated by *mcch-RepetitionPeriod* and *mcch-Offset*, the second bit for #2, the third bit for #3 , the fourth bit for #6, the fifth bit for #7 and the sixth bit for #8. TDD: The first/leftmost bit defines the allocation for subframe #3 of the radio frame indicated by *mcch-RepetitionPeriod* and *mcch-Offset*, the second bit for #4, third bit for #7, fourth bit for #8, fifth bit for #9. Uplink subframes are not allocated. The last bit is not used.
signallingMCS
Indicates the MCS applicable for the subframes indicated by the field *sf-AllocInfo* and for each (P)MCH that is configured for this MBSFN area, for the first subframe allocated to the (P)MCH within each MCH scheduling period (which may contain the MCH scheduling information provided by MAC). Value n2 corresponds with the value 2 for parameter I_{MCS} in TS 36.213 [23, Table 7.1.7.1-1], and so on.

– *MBSFN-SubframeConfig*

The IE *MBSFN-SubframeConfig* defines subframes that are reserved for MBSFN in downlink.

DAINGEAN_0002270

MBSFN-SubframeConfig information element

```
-- ASN1START

MBSFN-SubframeConfig ::=            SEQUENCE {
    radioframeAllocationPeriod          ENUMERATED {n1, n2, n4, n8, n16, n32},
    radioframeAllocationOffset          INTEGER (0..7),
    subframeAllocation                  CHOICE {
        oneFrame                            BIT STRING (SIZE(6)),
        fourFrames                          BIT STRING (SIZE(24))
    }
}
-- ASN1STOP
```

MBSFN-SubframeConfig field descriptions
fourFrames
A bit-map indicating MBSFN subframe allocation in four consecutive radio frames, "1" denotes that the corresponding subframe is allocated for MBSFN. The bitmap is interpreted as follows: FDD: Starting from the first radioframe and from the first/leftmost bit in the bitmap, the allocation applies to subframes #1, #2, #3 , #6, #7, and #8 in the sequence of the four radio-frames. TDD: Starting from the first radioframe and from the first/leftmost bit in the bitmap, the allocation applies to subframes #3, #4, #7, #8, and #9 in the sequence of the four radio-frames. The last four bits are not used. E-UTRAN allocates uplink subframes only if *eimta-MainConfig* is configured.
oneFrame
"1" denotes that the corresponding subframe is allocated for MBSFN. The following mapping applies: FDD: The first/leftmost bit defines the MBSFN allocation for subframe #1, the second bit for #2, third bit for #3 , fourth bit for #6, fifth bit for #7, sixth bit for #8. TDD: The first/leftmost bit defines the allocation for subframe #3, the second bit for #4, third bit for #7, fourth bit for #8, fifth bit for #9. E-UTRAN allocates uplink subframes only if *eimta-MainConfig* is configured. The last bit is not used.
radioFrameAllocationPeriod, radioFrameAllocationOffset
Radio-frames that contain MBSFN subframes occur when equation *SFN* mod *radioFrameAllocationPeriod* = *radioFrameAllocationOffset* is satisfied. Value n1 for *radioframeAllocationPeriod* denotes value 1, n2 denotes value 2, and so on. When *fourFrames* is used for *subframeAllocation*, the equation defines the first radio frame referred to in the description below. Values *n1* and *n2* are not applicable when *fourFrames* is used.
subframeAllocation
Defines the subframes that are allocated for MBSFN within the radio frame allocation period defined by the *radioFrameAllocationPeriod* and the *radioFrameAllocationOffset*.

– *PMCH-InfoList*

The IE *PMCH-InfoList* specifies configuration of all PMCHs of an MBSFN area, while IE *PMCH-InfoListExt* includes additional PMCHs, i.e. extends the PMCH list using the general principles specified in 5.1.2. The information provided for an individual PMCH includes the configuration parameters of the sessions that are carried by the concerned PMCH. For all PMCH that E-UTRAN includes in *PMCH-InfoList*, the list of ongoing sessions has at least one entry.

PMCH-InfoList information element

```
-- ASN1START

PMCH-InfoList-r9 ::=                SEQUENCE (SIZE (0..maxPMCH-PerMBSFN)) OF PMCH-Info-r9

PMCH-InfoListExt-r12 ::=            SEQUENCE (SIZE (0..maxPMCH-PerMBSFN)) OF PMCH-InfoExt-r12

PMCH-Info-r9 ::=                    SEQUENCE {
    pmch-Config-r9                      PMCH-Config-r9,
    mbms-SessionInfoList-r9         MBMS-SessionInfoList-r9,
    ...
}

PMCH-InfoExt-r12 ::=                SEQUENCE {
    pmch-Config-r12                     PMCH-Config-r12,
    mbms-SessionInfoList-r12            MBMS-SessionInfoList-r9,
    ...
}

MBMS-SessionInfoList-r9 ::=     SEQUENCE (SIZE (0..maxSessionPerPMCH)) OF MBMS-SessionInfo-r9

MBMS-SessionInfo-r9 ::=         SEQUENCE {
    tmgi-r9                             TMGI-r9,
```


DAINGEAN_0002271

```
    sessionId-r9                        OCTET STRING (SIZE (1))         OPTIONAL,   -- Need OR
    logicalChannelIdentity-r9           INTEGER (0..maxSessionPerPMCH-1),
    ...
}

PMCH-Config-r9 ::=                  SEQUENCE {
    sf-AllocEnd-r9                      INTEGER (0..1535),
    dataMCS-r9                          INTEGER (0..28),
    mch-SchedulingPeriod-r9         ENUMERATED {
                                        rf8, rf16, rf32, rf64, rf128, rf256, rf512, rf1024},
    ...
}

PMCH-Config-r12 ::=                 SEQUENCE {
    sf-AllocEnd-r12                     INTEGER (0..1535),
    dataMCS-r12                         CHOICE {
        normal-r12                          INTEGER (0..28),
        higerOrder-r12                      INTEGER (0..27)
    },
    mch-SchedulingPeriod-r12        ENUMERATED {
                                        rf4, rf8, rf16, rf32, rf64, rf128, rf256, rf512, rf1024},
    ...
}

TMGI-r9 ::=                     SEQUENCE {
    plmn-Id-r9                          CHOICE {
        plmn-Index-r9                       INTEGER (1..maxPLMN-r11),
        explicitValue-r9                    PLMN-Identity
    },
    serviceId-r9                        OCTET STRING (SIZE (3))
}


-- ASN1STOP
```

***PMCH-InfoList* field descriptions**
dataMCS
Indicates the value for parameter I_{MCS} in TS 36.213 [23], which defines the MCS applicable for the subframes of this (P)MCH as indicated by the field *commonSF-Alloc*. Value *normal* corresponds to Table 7.1.7.1-1 and value *higherOrder* corresponds to Table 7.1.7.1-1A. The MCS does however neither apply to the subframes that may carry MCCH i.e. the subframes indicated by the field *sf-AllocInfo* within *SystemInformationBlockType13* nor for the first subframe allocated to this (P)MCH within each MCH scheduling period (which may contain the MCH scheduling information provided by MAC).
mch-SchedulingPeriod
Indicates the MCH scheduling period i.e. the periodicity used for providing MCH scheduling information at lower layers (MAC) applicable for an MCH. Value rf8 corresponds to 8 radio frames, rf16 corresponds to 16 radio frames and so on. The *mch-SchedulingPeriod* starts in the radio frames for which: SFN mod *mch-SchedulingPeriod* = 0. E-UTRAN configures *mch-SchedulingPeriod* of the (P)MCH listed first in *PMCH-InfoList* to be smaller than or equal to *mcch-RepetitionPeriod*.
plmn-Index
Index of the entry in field *plmn-IdentityList* within *SystemInformationBlockType1*.
sessionId
Indicates the optional MBMS Session Identity, which together with TMGI identifies a transmission or a possible retransmission of a specific MBMS session: see TS 29.061 [51, Sections 20.5, 17.7.11, 17.7.15]. The field is included whenever upper layers have assigned a session identity i.e. one is available for the MBMS session in E-UTRAN.
serviceId
Uniquely identifies the identity of an MBMS service within a PLMN. The field contains octet 3- 5 of the IE Temporary Mobile Group Identity (TMGI) as defined in TS 24.008 [49]. The first octet contains the third octet of the TMGI, the second octet contains the fourth octet of the TMGI and so on.
sf-AllocEnd
Indicates the last subframe allocated to this (P)MCH within a period identified by field *commonSF-AllocPeriod*. The subframes allocated to (P)MCH corresponding with the nth entry in *pmch-InfoList* are the subsequent subframes starting from either the next subframe after the subframe identified by *sf-AllocEnd* of the $(n-1)^{th}$ listed (P)MCH or, for n=1, the first subframe defined by field *commonSF-Alloc*, through the subframe identified by *sf-AllocEnd* of the nth listed (P)MCH. Value 0 corresponds with the first subframe defined by field *commonSF-Alloc*.

DAINGEAN_0002272

6.3.7a SC-PTM information elements

– *SC-MTCH-InfoList*

The IE *SC-MTCH-InfoList* provides the list of ongoing MBMS sessions transmitted via SC-MRB and for each MBMS session, the associated G-RNTI and scheduling information.

***SC-MTCH-InfoList* information element**

```
-- ASN1START

SC-MTCH-InfoList-r13 ::=            SEQUENCE (SIZE (0..maxSC-MTCH-r13)) OF SC-MTCH-Info-r13

SC-MTCH-Info-r13 ::=                SEQUENCE    {
    mbmsSessionInfo-r13                     MBMSSessionInfo-r13,
    g-RNTI-r13                              BIT STRING(SIZE(16)),
    sc-mtch-schedulingInfo-r13              SC-MTCH-SchedulingInfo-r13          OPTIONAL,   -- Need
OP
    sc-mtch-neighbourCell-r13               BIT STRING (SIZE(maxNeighCell-SCPTM-r13))   OPTIONAL, --
Need OP
    ...
}

MBMSSessionInfo-r13 ::=             SEQUENCE    {
    tmgi-r13                                TMGI-r9,
    sessionId-r13                           OCTET STRING (SIZE (1))     OPTIONAL    -- Need OR
}

SC-MTCH-SchedulingInfo-r13::=       SEQUENCE    {
    onDurationTimerSCPTM-r13                ENUMERATED {
                                                psf1, psf2, psf3, psf4, psf5, psf6,
                                                psf8, psf10, psf20, psf30, psf40,
                                                psf50, psf60, psf80, psf100,
                                                psf200},
    drx-InactivityTimerSCPTM-r13            ENUMERATED {
                                                psf0, psf1, psf2, psf4, psf8,
                                                psf10, psf20, psf40,
                                                psf80, psf160, ps320,
                                                psf640, psf960,
                                                psf1280, psf1920, psf2560},
    schedulingPeriodStartOffsetSCPTM-r13    CHOICE {
        sf10                                    INTEGER(0..9),
        sf20                                    INTEGER(0..19),
        sf32                                    INTEGER(0..31),
        sf40                                    INTEGER(0..39),
        sf64                                    INTEGER(0..63),
        sf80                                    INTEGER(0..79),
        sf128                                   INTEGER(0..127),
        sf160                                   INTEGER(0..159),
        sf256                                   INTEGER(0..255),
        sf320                                   INTEGER(0..319),
        sf512                                   INTEGER(0..511),
        sf640                                   INTEGER(0..639),
        sf1024                                  INTEGER(0..1023),
        sf2048                                  INTEGER(0..2048),
        sf4096                                  INTEGER(0..4096),
        sf8192                                  INTEGER(0..8192)
    },
    ...
}

-- ASN1STOP
```


DAINGEAN_0002273

***SC-MTCH-InfoList* field descriptions**
mbmsSessionInfo Indicates the ongoing MBMS session in a SC-MTCH.
g-RNTI G-RNTI used to scramble the scheduling and transmission of a SC-MTCH.
sc-mtch-schedulingInfo DRX information for the SC-MTCH. If this field is absent, the SC-MTCH may be scheduled in any subframe.
onDurationTimerSCPTM Timer for SC-MTCH reception in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on.
drx-InactivityTimerSCPTM Timer for SC-MTCH in TS 36.321 [6]. Value in number of PDCCH sub-frames. Value psf0 corresponds to timer not configured, psf1 corresponds to 1 PDCCH sub-frame, psf2 corresponds to 2 PDCCH sub-frames and so on.
schedulingPeriodStartOffsetSCPTM *SC-MTCH-SchedulingCycle* and *SC-MTCH-SchedulingOffset* in TS 36.321 [6]. The value of *SC-MTCH-SchedulingCycle* is in number of sub-frames. Value sf10 corresponds to 10 sub-frames, sf20 corresponds to 20 sub-frames and so on. The value of *SC-MTCH-SchedulingOffset* is in number of sub-frames.
sc-mtch-neighbourCell Indicates neighbour cells which also provide this service on SC-MTCH. The first bit is set to 1 if the service is provided on SC-MTCH in the first cell in *scptmNeighbourCellList*, otherwise it is set to 0. The second bit is set to 1 if the service is provided on SC-MTCH in the second cell in *scptmNeighbourCellList*, and so on. If this field is absent, the UE shall assume that this service is not available on SC-MTCH in any neighbour cell.

– *SCPTM-NeighbourCellList*

The IE *SCPTM-NeighbourCellList* indicates a list of neighbour cells where ongoing MBMS sessions provided via SC-MRB in the current cells are also provided.

```
-- ASN1START

SCPTM-NeighbourCellList-r13 ::=     SEQUENCE (SIZE (1..maxNeighCell-SCPTM-r13)) OF PCI-ARFCN-r13

PCI-ARFCN-r13 ::=                   SEQUENCE {
        physCellId-r13                      PhysCellId,
        carrierFreq-r13                     ARFCN-ValueEUTRA-r9     OPTIONAL
}

-- ASN1STOP
```

***SCPTM-NeighbourCellList* field description**
carrierFreq Indicates the frequency of the neighbour cell indicated by *physCellId*. Absence of the IE means that the neighbour cell is on the same frequency as the current cell.

6.3.8 Sidelink information elements

– *SL-CommConfig*

The IE *SL-CommConfig* specifies the dedicated configuration information for sidelink communication. In particular it concerns the transmission resource configuration for sidelink communication on the primary frequency.

***SL-CommConfig* information element**

```
-- ASN1START

SL-CommConfig-r12 ::=               SEQUENCE    {
    commTxResources-r12                 CHOICE {
        release                             NULL,
        setup                               CHOICE {
            scheduled-r12                   SEQUENCE {
                sl-RNTI-r12                     C-RNTI,
                mac-MainConfig-r12              MAC-MainConfigSL-r12,
                sc-CommTxConfig-r12             SL-CommResourcePool-r12,
```


DAINGEAN_0002274

```
                mcs-r12                         INTEGER (0..28)                 OPTIONAL    -- Need
OP
            },
            ue-Selected-r12                 SEQUENCE {
                -- Pool for normal usage
                commTxPoolNormalDedicated-r12   SEQUENCE {
                    poolToReleaseList-r12           SL-TxPoolToReleaseList-r12 OPTIONAL,    -- Need
ON
                    poolToAddModList-r12            SL-CommTxPoolToAddModList-r12 OPTIONAL  -- Need
ON
                }
            }
        }
    }                                                                       OPTIONAL,   -- Need ON
    ...,
    [[  commTxResources-v1310                       CHOICE {
            release                             NULL,
            setup                               CHOICE {
                scheduled-v1310                     SEQUENCE {
                    logicalChGroupInfoList-r13          LogicalChGroupInfoList-r13,
                    multipleTx-r13                      BOOLEAN
                },
                ue-Selected-v1310                   SEQUENCE {
                    commTxPoolNormalDedicatedExt-r13    SEQUENCE {
                        poolToReleaseListExt-r13            SL-TxPoolToReleaseListExt-r13 OPTIONAL,
    -- Need ON
                        poolToAddModListExt-r13             SL-CommTxPoolToAddModListExt-r13
    OPTIONAL    -- Need ON
                    }
                }
            }
        }                                                               OPTIONAL,   -- Need ON
        commTxAllowRelayDedicated-r13       BOOLEAN         OPTIONAL    -- Need ON
    ]]
}

LogicalChGroupInfoList-r13 ::=      SEQUENCE (SIZE (1..maxLCG-r13)) OF SL-PriorityList-r13

SL-CommTxPoolToAddModList-r12 ::=       SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-
CommTxPoolToAddMod-r12

SL-CommTxPoolToAddModListExt-r13 ::=    SEQUENCE (SIZE (1..maxSL-TxPool-v1310)) OF SL-
CommTxPoolToAddModExt-r13

SL-CommTxPoolToAddMod-r12 ::=       SEQUENCE    {
    poolIdentity-r12                    SL-TxPoolIdentity-r12,
    pool-r12                            SL-CommResourcePool-r12
}

SL-CommTxPoolToAddModExt-r13 ::=        SEQUENCE    {
    poolIdentity-v1310                  SL-TxPoolIdentity-v1310,
    pool-r13                            SL-CommResourcePool-r12
}

MAC-MainConfigSL-r12 ::=        SEQUENCE    {
    periodic-BSR-TimerSL                PeriodicBSR-Timer-r12       OPTIONAL,   -- Need ON
    retx-BSR-TimerSL                    RetxBSR-Timer-r12
}

-- ASN1STOP
```

SL-CommConfig field descriptions
commTxAllowRelayDedicated Indicates whether the UE is allowed to transmit relay related sidelink communication using the configured dedicated transmission resources i.e. either via scheduled or via UE selected resources.
commTxPoolNormalDedicated Indicates a pool of transmission resources the UE is allowed to use while in RRC_CONNECTED.
logicalChGroupInfoList Indicates for each logical channel group the list of associated priorities, used as specified in TS 36.321 [6], in order of increasing logical channel group identity.
mcs Indicates the MCS as defined in TS 36.212 [23, 14.2.1]. If not configured, the selection of MCS is up to UE implementation.
multipleTx Indicates whether the UE should perform multiple transmissions to different destinations in one SC period in accordance with TS 36.321 [6, 5.14.1.1]. Value TRUE indicates that multiple transmissions should be performed.
sc-CommTxConfig Indicates a pool of resources for SC when E-UTRAN schedules Tx resources (i.e. when indices included in DCI format 5 indicate the actual data resources to be used as specified in TS 36.212 [22, 5.3.3.1.9]).
scheduled Indicates the configuration for the case E-UTRAN schedules the transmission resources based on sidelink specific BSR from the UE.
ue-Selected Indicates the configuration for the case the UE selects the transmission resources from a pool of resources configured by E-UTRAN.

– *SL-CommResourcePool*

The IE *SL-CommResourcePool* specifies the configuration information for an individual pool of resources for sidelink communication. The IE covers the configuration of both the sidelink control information and the data.

SL-CommResourcePool information element

```
-- ASN1START

SL-CommTxPoolList-r12 ::=          SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-CommResourcePool-r12

SL-CommTxPoolListExt-r13 ::=       SEQUENCE (SIZE (1..maxSL-TxPool-v1310)) OF SL-CommResourcePool-r12

SL-CommRxPoolList-r12 ::=          SEQUENCE (SIZE (1..maxSL-RxPool-r12)) OF SL-CommResourcePool-r12

SL-CommResourcePool-r12 ::=        SEQUENCE {
    sc-CP-Len-r12                          SL-CP-Len-r12,
    sc-Period-r12                          SL-PeriodComm-r12,
    sc-TF-ResourceConfig-r12               SL-TF-ResourceConfig-r12,
    data-CP-Len-r12                        SL-CP-Len-r12,
    dataHoppingConfig-r12                  SL-HoppingConfigComm-r12,
    ue-SelectedResourceConfig-r12              SEQUENCE {
        data-TF-ResourceConfig-r12                 SL-TF-ResourceConfig-r12,
        trpt-Subset-r12                        SL-TRPT-Subset-r12  OPTIONAL    -- Need OP
    }                                                                  OPTIONAL,   -- Need OR
    rxParametersNCell-r12                  SEQUENCE {
        tdd-Config-r12                     TDD-Config                  OPTIONAL,   -- Need OP
        syncConfigIndex-r12            INTEGER (0..15)
    }                                                                  OPTIONAL,   -- Need OR
    txParameters-r12                       SEQUENCE {
        sc-TxParameters-r12                SL-TxParameters-r12,
        dataTxParameters-r12               SL-TxParameters-r12
    }                                                                  OPTIONAL,   -- Cond Tx
    ...,
    [[  priorityList-r13                   SL-PriorityList-r13         OPTIONAL    -- Cond Tx
    ]]

}

SL-TRPT-Subset-r12 ::=             BIT STRING (SIZE (3..5))

-- ASN1STOP
```


DAINGEAN_0002276

***SL-CommResourcePool* field descriptions**
sc-Period Indicates the period over which resources are allocated in a cell for SC and over which scheduled and UE selected data transmissions occur, see PSCCH period in TS 36.213 [23]. Value in number of subframes. Value sf40 corresponds to 40 subframes, sf80 corresponds to 80 subframes and so on. E-UTRAN configures values sf40, sf80, sf160 and sf320 for FDD and for TDD config 1 to 5, values sf70, sf140 and sf280 for TDD config 0, and finally values sf60, sf120 and sf240 for TDD config 6.
syncConfigIndex Indicates the synchronisation configuration that is associated with a reception pool, by means of an index to the corresponding entry of *commSyncConfig* in *SystemInformationBlockType18*.
tdd-Config TDD configuration associated with the reception pool of the cell indicated by *syncConfigIndex*. Absence of the field indicates the same duplex mode as the cell providing this field and the same UL/DL configuration as indicated by *subframeAssignment* in *SystemInformationBlockType1* in case of TDD.
trpt-Subset Indicates the subset of T-RPT available (see TS 36.213 [23, 14.1.1.1.1]). Consists of a bitmap which is used to indicate the set of available 'k' values to be used for sidelink communication (see TS 36.213 [23, 14.1.1.3]). If T-RPT subset configuration is not signaled/ preconfigured then UE assumes the whole T-RPT set is available.

Conditional presence	Explanation
Tx	The field is mandatory present when included in *commTxPoolNormalDedicated*, *commTxPoolNormalDedicatedExt*, *commTxPoolNormalCommon*, *commTxPoolNormalCommonExt*, *commTxPoolExceptional* or *sc-CommTxConfig*. Otherwise the field is not present.

– *SL-CP-Len*

The IE *SL-CP-Len* indicates the cyclic prefix length, see TS 36.211 [21].

SL-CP-Len information element

```
-- ASN1START

SL-CP-Len-r12 ::=                ENUMERATED {normal, extended}

-- ASN1STOP
```

– *SL-DiscConfig*

The IE *SL-DiscConfig* specifies the dedicated configuration information for sidelink discovery.

SL-DiscConfig information element

```
-- ASN1START

SL-DiscConfig-r12 ::=                    SEQUENCE {
    discTxResources-r12                      CHOICE {
        release                              NULL,
        setup                                CHOICE {
            scheduled-r12                    SEQUENCE {
                discTxConfig-r12                     SL-DiscResourcePool-r12 OPTIONAL, -- Need ON
                discTF-IndexList-r12                 SL-TF-IndexPairList-r12     OPTIONAL, -- Need ON
                discHoppingConfig-r12                SL-HoppingConfigDisc-r12
                                                         OPTIONAL    -- Need ON
            },
            ue-Selected-r12                  SEQUENCE {
                discTxPoolDedicated-r12          SEQUENCE {
                    poolToReleaseList-r12            SL-TxPoolToReleaseList-r12 OPTIONAL,    -- Need
ON
                    poolToAddModList-r12             SL-DiscTxPoolToAddModList-r12 OPTIONAL  -- Need
ON
                }                                                        OPTIONAL    -- Need ON
            }
        }
    }                                                                    OPTIONAL,   -- Need ON
    ...,
```


DAINGEAN_0002277

```
    [[  discTF-IndexList-v1260              CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                discTF-IndexList-r12b               SL-TF-IndexPairList-r12b
            }
        }                                                           OPTIONAL    -- Need ON
    ]],
    [[  discTxResourcesPS-r13           CHOICE {
            release                             NULL,
            setup                               CHOICE {
                scheduled-r13                       SL-DiscTxConfigScheduled-r13,
                ue-Selected-r13                     SEQUENCE {
                    discTxPoolPS-Dedicated-r13          SL-DiscTxPoolDedicated-r13
                }
            }
        }                                                           OPTIONAL,   -- Need ON
        discTxInterFreqInfo-r13         CHOICE {
            release                             NULL,
            setup                               SEQUENCE {
                discTxCarrierFreq-r13               ARFCN-ValueEUTRA-r9         OPTIONAL,   -- Need
OR
                discTxRefCarrierDedicated-r13       SL-DiscTxRefCarrierDedicated-r13    OPTIONAL, --
Need OR
                discTxInfoInterFreqListAdd-r13          SL-DiscTxInfoInterFreqListAdd-r13   OPTIONAL
    -- Need ON
            }
        }                                                           OPTIONAL,   -- Need ON
        gapRequestsAllowedDedicated-r13     BOOLEAN         OPTIONAL,   -- Need ON
        discRxGapConfig-r13                 CHOICE {
            release                             NULL,
            setup                               SL-GapConfig-r13
        }                                                           OPTIONAL,   -- Need ON
        discTxGapConfig-r13                 CHOICE {
            release                             NULL,
            setup                               SL-GapConfig-r13
        }                                                           OPTIONAL,   -- Need ON
        discSysInfoToReportConfig-r13       CHOICE {
            release                             NULL,
            setup                               SL-DiscSysInfoToReportFreqList-r13
        }                                                           OPTIONAL    -- Need ON
    ]]
}

SL-DiscSysInfoToReportFreqList-r13 ::= SEQUENCE (SIZE (1..maxFreq)) OF ARFCN-ValueEUTRA-r9

SL-DiscTxInfoInterFreqListAdd-r13 ::=   SEQUENCE {
    discTxFreqToAddModList-r13              SEQUENCE (SIZE (1..maxFreq)) OF SL-
DiscTxResourceInfoPerFreq-r13   OPTIONAL,   -- Need ON
    discTxFreqToReleaseList-r13             SEQUENCE (SIZE (1..maxFreq)) OF ARFCN-ValueEUTRA-r9
    OPTIONAL,   -- Need ON
    ...
}

SL-DiscTxResourceInfoPerFreq-r13 ::=    SEQUENCE    {
    discTxCarrierFreq-r13                   ARFCN-ValueEUTRA-r9,
    discTxResources-r13                     SL-DiscTxResource-r13   OPTIONAL,   -- Need OR
    discTxResourcesPS-r13                   SL-DiscTxResource-r13   OPTIONAL,   -- Need OR
    discTxRefCarrierDedicated-r13           SL-DiscTxRefCarrierDedicated-r13    OPTIONAL,   -- Need
OR
    discCellSelectionInfo-r13                   CellSelectionInfoNFreq-r13          OPTIONAL,   --
Need OR
    ...
}

SL-DiscTxResource-r13 ::=               CHOICE {
    release                             NULL,
    setup                               CHOICE {
        scheduled-r13                   SL-DiscTxConfigScheduled-r13,
        ue-Selected-r13                 SL-DiscTxPoolDedicated-r13
    }
}

SL-DiscTxPoolToAddModList-r12 ::=       SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-
DiscTxPoolToAddMod-r12

SL-DiscTxPoolToAddMod-r12 ::=       SEQUENCE    {
    poolIdentity-r12                    SL-TxPoolIdentity-r12,
    pool-r12                            SL-DiscResourcePool-r12
```


DAINGEAN_0002278

```
}

SL-DiscTxConfigScheduled-r13 ::=            SEQUENCE {
    discTxConfig-r13                    SL-DiscResourcePool-r12 OPTIONAL, -- Need ON
    discTF-IndexList-r13                SL-TF-IndexPairList-r12b    OPTIONAL, -- Need ON
    discHoppingConfig-r13               SL-HoppingConfigDisc-r12    OPTIONAL,-- Need ON
    ...
}

SL-DiscTxPoolDedicated-r13 ::=          SEQUENCE {
    poolToReleaseList-r13           SL-TxPoolToReleaseList-r12 OPTIONAL,    -- Need ON
    poolToAddModList-r13            SL-DiscTxPoolToAddModList-r12 OPTIONAL  -- Need ON
}

SL-TF-IndexPairList-r12 ::=     SEQUENCE (SIZE (1..maxSL-TF-IndexPair-r12)) OF SL-TF-IndexPair-r12

SL-TF-IndexPair-r12 ::=     SEQUENCE    {
    discSF-Index-r12                    INTEGER (1.. 200)       OPTIONAL,   -- Need ON
    discPRB-Index-r12                   INTEGER (1.. 50)        OPTIONAL    -- Need ON
}

SL-TF-IndexPairList-r12b ::=        SEQUENCE (SIZE (1..maxSL-TF-IndexPair-r12)) OF SL-TF-IndexPair-
r12b

SL-TF-IndexPair-r12b ::=        SEQUENCE    {
    discSF-Index-r12b                   INTEGER (0..209)        OPTIONAL,    -- Need ON
    discPRB-Index-r12b                  INTEGER (0..49)         OPTIONAL     -- Need ON
}

SL-DiscTxRefCarrierDedicated-r13 ::=    CHOICE {
    pCell                               NULL,
    sCell                               SCellIndex-r10
}

-- ASN1STOP
```

***SL-DiscConfig* field descriptions**
discCellSelectionInfo Parameters that may be used by the UE to select/ reselect a cell on the concerned non serving frequency. If absent, the UE acquires the information from the target cell on the concerned frequency. See TS 36.304 [4, 11.4].
discSysInfoToReportConfig Indicates the request to start a *SidelinkUEInformation* procedure for reporting system information acquired during an inter-frequency discovery procedure.
discTF-IndexList Indicates a list of time-frequency resource indices pair where each pair of indices corresponds to one discovery message. E-UTRAN only configures *discTF-IndexList-r12b* when configuring the UE with scheduled SL discovery Tx resources. When receiving *discTF-IndexList-r12b*, the UE shall only consider this field (and hence ignore *discTF-IndexList-r12*, if included or previously configured).
discTxConfig Indicates the resources configuration used when E-UTRAN schedules Tx resources (i.e. the fields *discSF-Index* and *discPRB-Index* indicate the actual resources to be used).
discTxInterFreqInfo Indicates frequency applicable for the resources indicated by *discTxResources-r12* (i.e. original resource field may cover first inter-frequency), and possibly resource allocations on additional frequencies as may be indicated by field *discTxInfoInterFreqListAdd*.
discTxRefCarrierDedicated Indicates if the PCell or an SCell is to be used as reference for DL measurements and synchronization, instead of the DL frequency paired with the one used to transmit sidelink discovery announcements on, see TS 36.213 [23, 14.3.1].
discTxResources Indicates the resources assigned to the UE for discovery announcements, which can either be a pool from which the UE may select or a set of resources specifically assigned for use by the UE.
discTxResourcesPS Indicates the resources assigned to the UE for PS discovery announcements, which can either be a pool from which the UE may select or a set of resources specifically assigned for use by the UE.
SL-TF-IndexPair A pair of indices, one for the time domain and one for the frequency domain, indicating the start of resources within the pool covered by *discTxConfig*, see TS 36.211 [21, 9.5.6] for one discovery message. The upper limits of *discSF-Index* and *discPRB-Index* are defined in TS 36.213 [23, 14.3.1].

DAINGEAN_0002279

– *SL-DiscResourcePool*

The IE *SL-DiscResourcePool* specifies the configuration information for an individual pool of resources for sidelink discovery.

SL-DiscResourcePool information element

```
-- ASN1START

SL-DiscTxPoolList-r12 ::=       SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-DiscResourcePool-r12

SL-DiscRxPoolList-r12 ::=       SEQUENCE (SIZE (1..maxSL-RxPool-r12)) OF SL-DiscResourcePool-r12

SL-DiscResourcePool-r12 ::=     SEQUENCE    {
    cp-Len-r12                      SL-CP-Len-r12,
    discPeriod-r12                  ENUMERATED {rf32, rf64, rf128,
                                        rf256, rf512, rf1024, rf16-v1310, spare},
    numRetx-r12                     INTEGER (0..3),
    numRepetition-r12                   INTEGER (1..50),
    tf-ResourceConfig-r12               SL-TF-ResourceConfig-r12,
    txParameters-r12                    SEQUENCE {
        txParametersGeneral-r12         SL-TxParameters-r12,
        ue-SelectedResourceConfig-r12   SEQUENCE {
            poolSelection-r12               CHOICE {
                rsrpBased-r12                   SL-PoolSelectionConfig-r12,
                random-r12                      NULL
            },
            txProbability-r12               ENUMERATED {p25, p50, p75, p100}
        }                                                       OPTIONAL    -- Need OR
    }                                                           OPTIONAL,   -- Cond Tx
    rxParameters-r12                SEQUENCE {
        tdd-Config-r12                  TDD-Config              OPTIONAL,   -- Need OR
        syncConfigIndex-r12         INTEGER (0..15)
    }                                                           OPTIONAL,   -- Need OR
    ...,
    [[  discPeriod-v1310                CHOICE {
            release                             NULL,
            setup                               ENUMERATED {rf4, rf6, rf7, rf8,
                                                    rf12, rf14, rf24, rf28}
            }                                                   OPTIONAL,   -- Need ON
        rxParamsAddNeighFreq-r13        CHOICE {
            release                         NULL,
            setup                           SEQUENCE {
                physCellId-r13                  PhysCellIdList-r13
            }
        }                                                       OPTIONAL,   -- Need ON
        txParamsAddNeighFreq-r13        CHOICE {
            release                         NULL,
            setup                           SEQUENCE {
                physCellId-r13                  PhysCellIdList-r13,
                p-Max                           P-Max                   OPTIONAL,   -- Need OP
                tdd-Config-r13                  TDD-Config              OPTIONAL,   -- Cond TDD-OR
                tdd-Config-v1130                TDD-Config-v1130        OPTIONAL,   -- Cond TDD-OR
                freqInfo                            SEQUENCE {
                    ul-CarrierFreq                      ARFCN-ValueEUTRA    OPTIONAL,   -- Need OP
                    ul-Bandwidth                        ENUMERATED {n6, n15, n25, n50, n75, n100}
                                                                            OPTIONAL,   -- Need OP
                additionalSpectrumEmission          AdditionalSpectrumEmission
                },
                referenceSignalPower                INTEGER (-60..50),
                syncConfigIndex-r13             INTEGER (0..15)         OPTIONAL    -- Need OR
            }
        }                                                       OPTIONAL    -- Need ON
    ]]
}

PhysCellIdList-r13  ::=     SEQUENCE (SIZE (1.. maxSL-DiscCells-r13)) OF PhysCellId

SL-PoolSelectionConfig-r12 ::=      SEQUENCE {
    threshLow-r12                       RSRP-RangeSL2-r12,
    threshHigh-r12                      RSRP-RangeSL2-r12
}

-- ASN1STOP
```


DAINGEAN_0002280

SL-DiscResourcePool field descriptions
discPeriod
Indicates the period over which resources are allocated in a cell for discovery message transmission/reception, see PSDCH period in TS 36.213 [23]. Value in number of radio frames. Value rf32 corresponds to 32 radio frames, rf64 corresponds to 64 radio frames and so on. The extended values apply for PS discovery (not only for sidelink relaying). When broadcasting an extended value, E-UTRAN sets the original field to spare to ensure legacy UEs ignore the concerned pool entry.
numRepetition
Indicates the number of times *subframeBitmap* is repeated for mapping to subframes that occurs within a *discPeriod*. The highest value E-UTRAN uses is value 5 for FDD and TDD configuration 0, value 13 for TDD configuration 1, value 25 for TDD configuration 2, value 17 for TDD configuration 3, value 25 for TDD configuration 4, value 50 for TDD configuration 5 and value 7 for TDD configuration 6. E-UTRAN configures *numRepetition* and *subframeBitmap* such that the mapped subframes do not exceed the *discPeriod*.
poolSelection
Indicates the mechanism for selecting a (transmission) pool when multiple candidates are provided. E-UTRAN configures the same value (i.e. a pool selection method) for all candidate pools within one pool list (*discTxPoolCommon* or *discTxPoolDedicated*) but the pool selection method in different pool lists may or may not be the same.
syncConfigIndex
Indicates the synchronisation configuration that is associated with a reception or transmission pool, by means of an index to the corresponding entry of *discSyncConfig* in *SystemInformationBlockType19*.
threshLow, threshHigh
Specifies the thresholds used to select a resource pool in RSRP based pool selection. The E-UTRAN should configure *threshLow* and *threshHigh* such that the UE selects only one resource pool upon RSRP based pool selection.
txProbability
Indicates the probability of transmitting announcement in a discovery period when configured with a pool of resources, see TS 36.321 [6].

Conditional presence	Explanation
TDD-OR	The field is optional present for TDD, need OR; it is not present for FDD.
Tx	The field is mandatory present when included in *discTxPoolDedicated* or *discTxPoolCommon*. Otherwise the field is not present.

– *SL-DiscTxPowerInfo*

The IE *SL-DiscTxPowerInfo* specifies power control parameters for one or more power classes.

SL-DiscTxPowerInfo information element

```
-- ASN1START

SL-DiscTxPowerInfoList-r12 ::=  SEQUENCE (SIZE (maxSL-DiscPowerClass-r12)) OF SL-DiscTxPowerInfo-r12

SL-DiscTxPowerInfo-r12 ::=              SEQUENCE    {
    discMaxTxPower-r12                          P-Max,
    ...
}

-- ASN1STOP
```

SL-DiscTxPowerInfo field descriptions
discMaxTxPower
Indicates the P-Max parameter used to calculate the maximum transmit power a UE configured with the concerned range class, see TS 24.333 [70, 4.2.11]. The first entry in *SL-DiscTxPowerInfoList* corresponds to UE range class 'short', the second entry corresponds to 'medium' and the third entry corresponds to 'long'.

DAINGEAN_0002281

– *SL-GapConfig*

The IE *SL-GapConfig* indicates the gaps, requested or assigned, to enable the UE to receive or transmit sidelink discovery, intra or inter frequency (includings inter-PLMN).

SL-GapConfig information element

```
-- ASN1START

SL-GapConfig-r13 ::=                SEQUENCE {
    gapPatternList-r13              SL-GapPatternList-r13
}

SL-GapPatternList-r13 ::=   SEQUENCE (SIZE (1..maxSL-GP-r13)) OF SL-GapPattern-r13

SL-GapPattern-r13 ::=               SEQUENCE {
    gapPeriod-r13                       ENUMERATED {sf40, sf60, sf70, sf80, sf120, sf140, sf160,
                                              sf240, sf280, sf320, sf640, sf1280, sf2560, sf5120,
                                              sf10240},
    gapOffset-r12                       SL-OffsetIndicator-r12,
    gapSubframeBitmap-r13               BIT STRING (SIZE (1..10240)),
    ...
}

-- ASN1STOP
```

SL-GapConfig field descriptions
gapOffset   Indicates the offset from the start of SFN 0 to the start of the first *gapPeriod*. If the SFN period is not an integer multiple of *gapPeriod*, no subframes within this period (i.e. from SFN 0 to offset) are considered part of the gap.
gapPeriod   Indicates the period by which *gapSubframeBitmap* is repeated.
gapSubframeBitmap   Indicates the subframes of one or more individual gaps, not only covering the subframes of the associated discovery resources but also including e.g. re-tuning and synchronisation delays. The UE and E-UTRAN signal bit strings of valid sizes only i.e. sizes equal to or less than *gapPeriod*. Value 1 indicates that the UE is allowed to use the subframe for sidelink discovery.

– *SL-GapRequest*

The IE *SL-GapRequest* indicates the gaps requested by the UE to receive or transmit sidelink discovery, intra or inter frequency (includings inter-PLMN).

SL-GapRequest information element

```
-- ASN1START

SL-GapRequest-r13 ::=               SEQUENCE (SIZE (1..maxFreq)) OF SL-GapFreqInfo-r13

SL-GapFreqInfo-r13 ::=              SEQUENCE {
    carrierFreq-r13                 ARFCN-ValueEUTRA-r9                 OPTIONAL,
    gapPatternList-r13              SL-GapPatternList-r13
}

-- ASN1STOP
```

– *SL-HoppingConfig*

The IE *SL-HoppingConfig* indicates the hopping configuration used for sidelink.

SL-HoppingConfig information element

```
-- ASN1START

SL-HoppingConfigComm-r12 ::=        SEQUENCE    {
    hoppingParameter-r12                INTEGER (0..504),
    numSubbands-r12                     ENUMERATED {ns1, ns2, ns4},
```


DAINGEAN_0002282

```
    rb-Offset-r12                       INTEGER (0..110)
}

SL-HoppingConfigDisc-r12 ::=    SEQUENCE    {
    a-r12                                   INTEGER (1..200),
    b-r12                                   INTEGER (1..10),
    c-r12                                   ENUMERATED {n1, n5}
}

-- ASN1STOP
```

***SL-HoppingConfig* field descriptions**
a   Per cell parameter: $N_{PSDCH}^{(1)}$ see TS 36.213 [23, 14.3.1].
b   Per UE parameter: $N_{PSDCH}^{(2)}$ see TS 36.213 [23, 14.3.1].
c   Per cell parameter: $N_{PSDCH}^{(3)}$ see TS 36.213 [23, 14.3.1]
hoppingParameter   Affects the hopping performed as specificed in TS 36.213 [23, 14.1.1.2 and 14.1.1.4]. In case value 504 is received, the value used by the UE is 510.
numSubbands   Parameter: N_{sb} see TS 36.211 [21, 9.3.6].
rb-Offset   Parameter: N_{RB}^{HO}, see TS 36.211 [21, 9.3.6].

– *SL-OffsetIndicator*

The IE *SL-OffsetIndicator* indicates the offset of the pool of resources relative to SFN 0 of the cell from which it was obtained or, when out of coverage, relative to DFN 0.

***SL-OffsetIndicator* information element**

```
-- ASN1START

SL-OffsetIndicator-r12 ::=          CHOICE {
    small-r12                               INTEGER (0..319),
    large-r12                               INTEGER (0..10239)
}

SL-OffsetIndicatorSync-r12 ::=          INTEGER (0..39)

-- ASN1STOP
```

***SL-OffsetIndicator* field descriptions**
SL-OffsetIndicator   In *sc-TF-ResourceConfig*, it indicates the offset of the first period of pool of resources within a SFN cycle. For *data-TF-ResourceConfig*, it corresponds to the *offsetIndicator* as defined in TS 36.213 [23, 14.1.3].
SL-OffsetIndicatorSync   Synchronisation resources are present in those SFN and subframes which satisfy the relation: (SFN*10+ *Subframe Number*) mod 40 = *SL-OffsetIndicatorSync*.

– *SL-PeriodComm*

The IE *SL-PeriodComm* indicates the period over which resources allocated in a cell for sidelink communication.

***SL-PeriodComm* information element**

```
-- ASN1START

SL-PeriodComm-r12 ::=                   ENUMERATED {sf40, sf60, sf70, sf80, sf120, sf140,
```


DAINGEAN_0002283

```
                                                sf160, sf240, sf280, sf320, spare6, spare5,
                                                spare4, spare3, spare2, spare}

-- ASN1STOP
```

– SL-Priority

The IE *SL-Priority* indicates the one or more priorities of resource pool used for sidelink communication, or of a logical channel group used in case of scheduled sidelink communication resources, see TS 36.321 [6].

SL-Priority information element

```
-- ASN1START

SL-PriorityList-r13 ::=     SEQUENCE (SIZE (1..maxSL-Prio-r13)) OF SL-Priority-r13

SL-Priority-r13 ::=         INTEGER (1..8)

-- ASN1STOP
```

– SLSSID

The IE *SLSSID* identifies a cell and is used by the receiving UE to detect asynchronous neighbouring cells, and by transmitting UEs to extend the synchronisation signals beyond the cell's coverage area.

SLSSID information element

```
-- ASN1START

SLSSID-r12 ::=                INTEGER (0..167)

-- ASN1STOP
```

– SL-SyncConfig

The IE *SL-SyncConfig* specifies the configuration information concerning reception of synchronisation signals from neighbouring cells as well as concerning the transmission of synchronisation signals for sidelink communication and sidelink discovery.

SL-SyncConfig information element

```
-- ASN1START

SL-SyncConfigList-r12 ::=       SEQUENCE (SIZE (1..maxSL-SyncConfig-r12)) OF SL-SyncConfig-r12

SL-SyncConfig-r12 ::=                   SEQUENCE {
    syncCP-Len-r12                          SL-CP-Len-r12,
    syncOffsetIndicator-r12             SL-OffsetIndicatorSync-r12,
    slssid-r12                              SLSSID-r12,
    txParameters-r12                            SEQUENCE {
        syncTxParameters-r12                    SL-TxParameters-r12,
        syncTxThreshIC-r12                      RSRP-RangeSL-r12,
        syncInfoReserved-r12                    BIT STRING (SIZE (19))  OPTIONAL    -- Need OR
    }                                                                   OPTIONAL,   -- Need OR
    rxParamsNCell-r12                       SEQUENCE {
        physCellId-r12                          PhysCellId,
        discSyncWindow-r12                  ENUMERATED {w1, w2}
    }                                                                   OPTIONAL,   -- Need OR
    ...,
    [[  syncTxPeriodic-r13                  ENUMERATED {true}           OPTIONAL    -- Need OR
    ]]
}

SL-SyncConfigListNFreq-r13 ::=      SEQUENCE (SIZE (1..maxSL-SyncConfig-r12)) OF SL-SyncConfigNFreq-
r13

SL-SyncConfigNFreq-r13 ::=          SEQUENCE {
```


DAINGEAN_0002284

```
    asyncParameters-r13                 SEQUENCE {
        syncCP-Len-r13                      SL-CP-Len-r12,
        syncOffsetIndicator-r13             SL-OffsetIndicatorSync-r12,
        slssid-r13                          SLSSID-r12
    }                                                           OPTIONAL,   -- Need OR
    txParameters-r13                    SEQUENCE {
        syncTxParameters-r13                SL-TxParameters-r12,
        syncTxThreshIC-r13                  RSRP-RangeSL-r12,
        syncInfoReserved-r13                BIT STRING (SIZE (19))  OPTIONAL,   -- Need OR
        syncTxPeriodic-r13                  ENUMERATED {true}       OPTIONAL    -- Need OR
    }                                                           OPTIONAL,   -- Need OR
    rxParameters-r13                    SEQUENCE {
        discSyncWindow-r13                  ENUMERATED {w1, w2}
    }                                                               OPTIONAL,   -- Need OR
    ...
}
-- ASN1STOP
```


DAINGEAN_0002285

SL-SyncConfig field descriptions
discSyncWindow Indicates the synchronization window over which the UE expects that SLSS or discovery resources indicated by the pool configuration (see TS 36.213 [23, 14.4]). The value *w1* denotes 5 milliseconds. The value *w2* denotes the length corresponding to normal cyclic prefix divided by 2.
syncInfoReserved Reserved for future use.
syncOffsetIndicator E-UTRAN should ensure *syncOffsetIndicator* is set to the same value as *syncOffsetIndicator1* or *syncOffsetIndicator2* in *preconfigSync* within *SL-Preconfiguration*, if configured.
syncTxPeriodic Indicates whether in each discovery period in which UE transmits discovery, the UE transmits SLSS once or periodically (i.e. every 40ms). In the latter case (periodic) the UE also transmits the *MasterInformationBlock-SL* message alongside. E-UTRAN configures this field only for synchronisation configurations applicable for PS discovery.
syncTxThreshIC Indicates the threshold used while in coverage. In case the RSRP measurement of the cell chosen for transmission of sidelink communication/ discovery announcements, or of the cell used as reference for DL measurements and synchronization, is below the level indicated by this field, the UE may transmit SLSS (i.e. become synchronisation reference) when performing the corresponding sidelink transmission..
txParameters Includes parameters relevant only for transmission. E-UTRAN includes the field in one entry per list, as included in *commSyncConfig* or *discSyncConfig*.

– *SL-DiscSysInfoReport*

The IE *SL-DiscSysInfoReport* contains the parameters related to sidelink discovery acquired from system information of inter-frequency cells (including inter-PLMN).

***SL-DiscSysInfoReport* information element**

```
-- ASN1START

SL-DiscSysInfoReport-r13 ::=    SEQUENCE {
    plmn-IdentityList-r13           PLMN-IdentityList           OPTIONAL,
    cellIdentity-r13                CellIdentity                OPTIONAL,
    carrierFreqInfo-r13             ARFCN-ValueEUTRA-r9         OPTIONAL,
    discRxResources-r13             SL-DiscRxPoolList-r12       OPTIONAL,
    discTxPoolCommon-r13            SL-DiscTxPoolList-r12       OPTIONAL,
    discTxPowerInfo-r13             SL-DiscTxPowerInfoList-r12  OPTIONAL,
    discSyncConfig-r13              SL-SyncConfigNFreq-r13      OPTIONAL,
    discCellSelectionInfo-r13       SEQUENCE {
        q-RxLevMin-r13                  Q-RxLevMin,
        q-RxLevMinOffset-r13            INTEGER (1..8)          OPTIONAL
    }                                                           OPTIONAL,
    cellReselectionInfo-r13         SEQUENCE {
        q-Hyst-r13                      ENUMERATED {
                                            dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10,
                                            dB12, dB14, dB16, dB18, dB20, dB22, dB24},
        q-RxLevMin-r13                  Q-RxLevMin,
        t-ReselectionEUTRA-r13          T-Reselection
    }                                                           OPTIONAL,
    tdd-Config-r13                  TDD-Config                  OPTIONAL,
    freqInfo-r13                    SEQUENCE {
        ul-CarrierFreq-r13              ARFCN-ValueEUTRA                OPTIONAL,
        ul-Bandwidth-r13                ENUMERATED {n6, n15, n25, n50, n75, n100}
                                                                        OPTIONAL,
        additionalSpectrumEmission-r13  AdditionalSpectrumEmission      OPTIONAL
    }                                                               OPTIONAL,
    p-Max-r13                       P-Max   OPTIONAL,
    referenceSignalPower-r13        INTEGER (-60..50)   OPTIONAL,
    ...
}

-- ASN1STOP
```


DAINGEAN_0002286

SL-DiscSysInfoReport field descriptions
carrierFreqInfo
Indicates the frequency of the cell from which the UE acquired the system information relevant for discovery
cellIdentity
Indicated the identity of the cell from which the UE acquired the system information relevant for discovery
plmn-IdentityList
Indicates the list of PLMN identity of the cell from which the UE acquired the system information relevant for discovery

– *SL-TF-ResourceConfig*

The IE *SL-TF-ResourceConfig* specifies a set of time/ frequency resources used for sidelink.

SL-TF-ResourceConfig information element

```
-- ASN1START

SL-TF-ResourceConfig-r12 ::=        SEQUENCE    {
    prb-Num-r12                         INTEGER (1..100),
    prb-Start-r12                       INTEGER (0..99),
    prb-End-r12                         INTEGER (0..99),
    offsetIndicator-r12                 SL-OffsetIndicator-r12,
    subframeBitmap-r12                  SubframeBitmapSL-r12
}

SubframeBitmapSL-r12 ::=        CHOICE {
    bs4-r12                             BIT STRING (SIZE (4)),
    bs8-r12                             BIT STRING (SIZE (8)),
    bs12-r12                            BIT STRING (SIZE (12)),
    bs16-r12                            BIT STRING (SIZE (16)),
    bs30-r12                            BIT STRING (SIZE (30)),
    bs40-r12                            BIT STRING (SIZE (40)),
    bs42-r12                            BIT STRING (SIZE (42))
}

-- ASN1STOP
```

SL-TF-ResourceConfig field descriptions
prb-Start, prb-End, prb-Num
Sidelink transmissions on a sub-frame can occur on PRB with index greater than or equal to *prb-Start* and less than *prb-Start* + *prb-Num*, and on PRB with index greater than *prb-End* - *prb-Num* and less than or equal to *prb-End*. Even for neighbouring cells, *prb-Start* and prb-End , are relative to PRB #0 of the cell from which it was obtained. See TS 36.213 [23, 14.1.3, 14.2.3, 14.3.3].
subframeBitmap
Indicates the subframe bitmap indicating resources used for sidelink. E-UTRAN configures value *bs40* for FDD and the following values for TDD: value *bs42* for configuration0, value *bs16* for configuration1, value bs8 for configuration2, value *bs12* for configuration3, value *bs8* for configuration4, value *bs4* for configuration5 and value *bs30* for configuration6.

– *SL-TxParameters*

The IE *SL-TxParameters* identifies a set of parameters configured for sidelink transmission, used for communication, discovery and synchronisation.

SL-TxParameters information element

```
-- ASN1START

SL-TxParameters-r12 ::=             SEQUENCE    {
    alpha-r12                           Alpha-r12,
    p0-r12                              P0-SL-r12
}

P0-SL-r12 ::=                           INTEGER (-126..31)

-- ASN1STOP
```


DAINGEAN_0002287

***SL-TxParameters* field descriptions**
alpha
Parameter(s): $\alpha_{PSSCH,1}, \alpha_{PSSCH,2}, \alpha_{PSCCH,1}, \alpha_{PSCCH,2}, \alpha_{PSDCH,1}, \alpha_{PSSS}$ See TS 36.213 [23, 14.1.1.5, 14.2.1.2, 14.3.1, 14.4] where al0 corresponds to 0, al04 corresponds to value 0.4, al05 to 0.5, al06 to 0.6, al07 to 0.7, al08 to 0.8, al09 to 0.9 and al1 corresponds to 1. This field applies for sidelink power control.
p0
Parameter: $P_{O\_PSSCH,1}, P_{O\_PSSCH,2}, P_{O\_PSCCH,1}, P_{O\_PSCCH,2}, P_{O\_PSDCH,1}, P_{O\_PSSS}$ see TS 36.213 [23, 14.1.1.5, 14.2.1.2, 14.3.1, 14.4], unit dBm.

– *SL-TxPoolIdentity*

The IE *SL-TxPoolIdentity* identifies an individual pool entry configured for sidelink transmission, used for communication and discovery.

***SL-TxPoolIdentity* information element**

```
-- ASN1START

SL-TxPoolIdentity-r12 ::=           INTEGER (1.. maxSL-TxPool-r12)

SL-TxPoolIdentity-v1310 ::=     INTEGER (maxSL-TxPool-r12Plus1-r13.. maxSL-TxPool-r13)

SL-TxPoolIdentity-r13 ::=       INTEGER (1.. maxSL-TxPool-r13)

-- ASN1STOP
```

– *SL-TxPoolToReleaseList*

The IE *SL-TxPoolToReleaseList* is used to release one or more individual pool entries used for sidelink transmission, for communication and discovery.

***SL-TxPoolToReleaseList* information element**

```
-- ASN1START

SL-TxPoolToReleaseList-r12 ::=  SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-TxPoolIdentity-r12

SL-TxPoolToReleaseListExt-r13 ::=   SEQUENCE (SIZE (1..maxSL-TxPool-v1310)) OF SL-TxPoolIdentity-
v1310

-- ASN1STOP
```

6.4 RRC multiplicity and type constraint values

– Multiplicity and type constraint definitions

```
-- ASN1START

maxACDC-Cat-r13             INTEGER ::= 16  -- Maximum number of ACDC categories (per PLMN)
maxAvailNarrowBands-r13     INTEGER ::= 16  -- Maximum number of narrowbands
maxBandComb-r10             INTEGER ::= 128 -- Maximum number of band combinations.
maxBandComb-r11             INTEGER ::= 256 -- Maximum number of additional band combinations.
maxBandComb-r13             INTEGER ::= 384 -- Maximum number of band combinations in Rel-13
maxBands                    INTEGER ::= 64  -- Maximum number of bands listed in EUTRA UE caps
maxBandwidthClass-r10       INTEGER ::= 16  -- Maximum number of supported CA BW classes per band
maxBandwidthCombSet-r10     INTEGER ::= 32  -- Maximum number of bandwidth combination sets per
                                            -- supported band combination
maxCDMA-BandClass           INTEGER ::= 32  -- Maximum value of the CDMA band classes
maxCE-Level-r13             INTEGER ::= 4   -- Maximum number of CE levels
maxCellBlack                INTEGER ::= 16  -- Maximum number of blacklisted physical cell identity
                                            -- ranges listed in SIB type 4 and 5
maxCellHistory-r12          INTEGER ::= 16  -- Maximum number of visited EUTRA cells reported
maxCellInfoGERAN-r9         INTEGER ::= 32  -- Maximum number of GERAN cells for which system in-
```


DAINGEAN_0002288

```
                                        -- formation can be provided as redirection assistance
maxCellInfoUTRA-r9          INTEGER ::= 16  -- Maximum number of UTRA cells for which system
                                        -- information can be provided as redirection
                                        -- assistance
maxCombIDC-r11              INTEGER ::= 128 -- Maximum number of reported UL CA combinations
maxCSI-IM-r11               INTEGER ::= 3   -- Maximum number of CSI-IM configurations
                                        -- (per carrier frequency)
maxCSI-IM-r12               INTEGER ::= 4   -- Maximum number of CSI-IM configurations
                                        -- (per carrier frequency)
minCSI-IM-r13               INTEGER ::= 5   -- Minimum number of CSI IM configurations from which
                                        -- REL-13 extension is used
maxCSI-IM-r13               INTEGER ::= 24  -- Maximum number of CSI-IM configurations
                                        -- (per carrier frequency)
maxCSI-IM-v1310             INTEGER ::= 20  -- Maximum number of additional CSI-IM configurations
                                        --  (per carrier frequency)
maxCSI-Proc-r11             INTEGER ::= 4   -- Maximum number of CSI processes (per carrier
                                        --  frequency)
maxCSI-RS-NZP-r11           INTEGER ::= 3   -- Maximum number of CSI RS resource
                                        --  configurations using non-zero Tx power
                                        --  (per carrier frequency)
minCSI-RS-NZP-r13           INTEGER ::= 4   -- Minimum number of CSI RS resource from which
                                        -- REL-13 extension is used
maxCSI-RS-NZP-r13           INTEGER ::= 24  -- Maximum number of CSI RS resource
                                        --  configurations using non-zero Tx power
                                        --  (per carrier frequency)
maxCSI-RS-NZP-v1310         INTEGER ::= 21  -- Maximum number of additional CSI RS resource
                                        --  configurations using non-zero Tx power
                                        --  (per carrier frequency)
maxCSI-RS-ZP-r11            INTEGER ::= 4   -- Maximum number of CSI RS resource
                                        --  configurations using zero Tx power(per carrier
                                        --  frequency)
maxCQI-ProcExt-r11          INTEGER ::= 3   -- Maximum number of additional periodic CQI
                                        -- configurations (per carrier frequency)
maxFreqUTRA-TDD-r10         INTEGER ::= 6   -- Maximum number of UTRA TDD carrier frequencies for
                                        -- which system information can be provided as
                                        -- redirection assistance
maxCellInter                INTEGER ::= 16  -- Maximum number of neighbouring inter-frequency
                                        -- cells listed in SIB type 5
maxCellIntra                INTEGER ::= 16  -- Maximum number of neighbouring intra-frequency
                                        -- cells listed in SIB type 4
maxCellListGERAN            INTEGER ::= 3   -- Maximum number of lists of GERAN cells
maxCellMeas                 INTEGER ::= 32  -- Maximum number of entries in each of the
                                        -- cell lists in a measurement object
maxCellReport               INTEGER ::= 8   -- Maximum number of reported cells/CSI-RS resources
maxCSI-RS-Meas-r12          INTEGER ::= 96  -- Maximum number of entries in the CSI-RS list
                                        -- in a measurement object
maxDRB                      INTEGER ::= 11  -- Maximum number of Data Radio Bearers
maxDS-Duration-r12          INTEGER ::= 5   -- Maximum number of subframes in a discovery signals
                                        -- occasion
maxDS-ZTP-CSI-RS-r12        INTEGER ::= 5   -- Maximum number of zero transmission power CSI-RS for
                                        -- a serving cell concerning discovery signals
maxEARFCN                   INTEGER ::= 65535   -- Maximum value of EUTRA carrier frequency
maxEARFCN-Plus1             INTEGER ::= 65536   -- Lowest value extended EARFCN range
maxEARFCN2                  INTEGER ::= 262143  -- Highest value extended EARFCN range
maxEPDCCH-Set-r11           INTEGER ::= 2   -- Maximum number of EPDCCH sets
maxFBI                      INTEGER ::= 64  -- Maximum value of fequency band indicator
maxFBI-Plus1                    INTEGER ::= 65  -- Lowest value extended FBI range
maxFBI2                     INTEGER ::= 256 -- Highest value extended FBI range
maxFreq                     INTEGER ::= 8   -- Maximum number of carrier frequencies
maxFreqIDC-r11              INTEGER ::= 32  -- Maximum number of carrier frequencies that are
                                        -- affected by the IDC problems
maxFreqMBMS-r11             INTEGER ::= 5   -- Maximum number of carrier frequencies for which an
                                        -- MBMS capable UE may indicate an interest
maxGERAN-SI                 INTEGER ::= 10  -- Maximum number of GERAN SI blocks that can be
                                        -- provided as part of NACC information
maxGNFG                     INTEGER ::= 16  -- Maximum number of GERAN neighbour freq groups
maxLCG-r13                  INTEGER ::= 4   -- Maximum number of logical channel groups
maxLogMeasReport-r10        INTEGER ::= 520 -- Maximum number of logged measurement entries
                                        --  that can be reported by the UE in one message
maxMBSFN-Allocations        INTEGER ::= 8   -- Maximum number of MBSFN frame allocations with
                                        -- different offset
maxMBSFN-Area               INTEGER ::= 8
maxMBSFN-Area-1             INTEGER ::= 7
maxMBMS-ServiceListPerUE-r13    INTEGER ::= 15  -- Maximum number of services which the UE can
                                -- include in the MBMS interest indication
maxMeasId                   INTEGER ::= 32
maxMeasId-Plus1             INTEGER ::= 33
maxMeasId-r12               INTEGER ::= 64
```


DAINGEAN_0002289

```
maxMultiBands                INTEGER ::= 8   -- Maximum number of additional frequency bands
                                             -- that a cell belongs to
maxNS-Pmax-r10               INTEGER ::= 8   -- Maximum number of NS and P-Max values per band
maxNAICS-Entries-r12             INTEGER ::= 8   -- Maximum number of supported NAICS combination(s)
maxNeighCell-r12                 INTEGER ::= 8   -- Maximum number of neighbouring cells in NAICS
                                             -- configuration (per carrier frequency)
maxNeighCell-SCPTM-r13       INTEGER ::= 8   -- Maximum number of SCPTM neighbour cells
maxObjectId                  INTEGER ::= 32
maxObjectId-Plus1-r13        INTEGER ::= 33
maxObjectId-r13              INTEGER ::= 64
maxP-a-PerNeighCell-r12      INTEGER ::= 3   -- Maximum number of power offsets for a neighbour cell
                                             -- in NAICS configuration
maxPageRec                   INTEGER ::= 16  --
maxPhysCellIdRange-r9        INTEGER ::= 4   -- Maximum number of physical cell identity ranges
maxPLMN-r11                  INTEGER ::= 6   -- Maximum number of PLMNs
maxPNOffset                  INTEGER ::= 511 -- Maximum number of CDMA2000 PNOffsets
maxPMCH-PerMBSFN             INTEGER ::= 15
maxQCI-r13                   INTEGER ::= 6   -- Maximum number of QCIs
maxRAT-Capabilities          INTEGER ::= 8   -- Maximum number of interworking RATs (incl EUTRA)
maxRE-MapQCL-r11             INTEGER ::= 4   -- Maximum number of PDSCH RE Mapping configurations
                                             --  (per carrier frequency)
maxReportConfigId            INTEGER ::= 32
maxRSTD-Freq-r10             INTEGER ::= 3   -- Maximum number of frequency layers for RSTD
                                             -- measurement
maxSAI-MBMS-r11              INTEGER ::= 64  -- Maximum number of MBMS service area identities
                                             -- broadcast per carrier frequency
maxSCell-r10                 INTEGER ::= 4   -- Maximum number of SCells
maxSCell-r13                 INTEGER ::= 31  -- Highest value of extended number range of SCells
maxSC-MTCH-r13               INTEGER ::= 1023    -- Maximum number of SC-MTCHs in one cell
maxSL-CommRxPoolNFreq-r13    INTEGER ::= 32  -- Maximum number of individual sidelink communication
                                             -- Rx resource pools on neighbouring freq
maxSL-CommRxPoolPreconf-v1310    INTEGER ::= 12  -- Maximum number of additional preconfigured
                                                 -- sidelink communication Rx resource pool entries
maxSL-TxPool-r12Plus1-r13    INTEGER ::= 5   -- First additional individual sidelink
                                               -- Tx resource pool
maxSL-TxPool-v1310           INTEGER ::= 4   -- Maximum number of additional sidelink
                                               -- Tx resource pool entries
maxSL-TxPool-r13             INTEGER ::= 8   -- Maximum number of individual sidelink
                                               -- Tx resource pools
maxSL-CommTxPoolPreconf-v1310    INTEGER ::= 7   -- Maximum number of additional preconfigured
                                                 -- sidelink Tx resource pool entries
maxSL-Dest-r12           INTEGER ::= 16          -- Maximum number of sidelink destinations
maxSL-DiscCells-r13      INTEGER ::= 16          -- Maximum number of cells with similar sidelink
                                                 -- configurations
maxSL-DiscPowerClass-r12     INTEGER ::= 3       -- Maximum number of sidelink power classes
maxSL-DiscRxPoolPreconf-r13      INTEGER ::= 16  -- Maximum number of preconfigured sidelink
                                                 -- discovery Rx resource pool entries
maxSL-DiscSysInfoReportFreq-r13 INTEGER ::= 8    -- Maximum number of frequencies to include in a
                                                 -- SidelinkUEInformation for SI reporting
maxSL-DiscTxPoolPreconf-r13      INTEGER ::= 4   -- Maximum number of preconfigured sidelink
                                                 -- discovery Tx resource pool entries
maxSL-GP-r13             INTEGER ::= 8   -- Maximum number of gap patterns that can be requested
                                         -- for a frequency or assigned
maxSL-Prio-r13           INTEGER ::= 8   -- Maximum number of entries in sidelink priority list
maxSL-RxPool-r12             INTEGER ::= 16  -- Maximum number of individual sidelink Rx resource
pools
maxSL-SyncConfig-r12         INTEGER ::= 16  -- Maximum number of sidelink Sync configurations
maxSL-TF-IndexPair-r12   INTEGER ::= 64  -- Maximum number of sidelink Time Freq resource index
                                         --  pairs
maxSL-TxPool-r12             INTEGER ::= 4   -- Maximum number of individual sidelink Tx resource
pools
maxSTAG-r11                  INTEGER ::= 3   -- Maximum number of STAGs
maxServCell-r10              INTEGER ::= 5   -- Maximum number of Serving cells
maxServCell-r13              INTEGER ::= 32  -- Highest value of extended number range of Serving
cells
maxServiceCount              INTEGER ::= 16  -- Maximum number of MBMS services that can be included
                                             --  in an MBMS counting request and response
maxServiceCount-1            INTEGER ::= 15
maxSessionPerPMCH            INTEGER ::= 29
maxSessionPerPMCH-1          INTEGER ::= 28
maxSIB                       INTEGER ::= 32  -- Maximum number of SIBs
maxSIB-1                     INTEGER ::= 31
maxSI-Message                INTEGER ::= 32  -- Maximum number of SI messages
maxSimultaneousBands-r10     INTEGER ::= 64  -- Maximum number of simultaneously aggregated bands
maxSubframePatternIDC-r11    INTEGER ::= 8   -- Maximum number of subframe reservation patterns
                                             -- that the UE can simultaneously recommend to the
                                             -- E-UTRAN for use.
maxUTRA-FDD-Carrier          INTEGER ::= 16  -- Maximum number of UTRA FDD carrier frequencies
```


DAINGEAN_0002290

```
maxUTRA-TDD-Carrier         INTEGER ::= 16  -- Maximum number of UTRA TDD carrier frequencies
maxWLAN-Id-r12              INTEGER ::= 16  -- Maximum number of WLAN identifiers
maxWLAN-Bands-r13           INTEGER ::= 8   -- Maximum number of WLAN bands
maxWLAN-Id-r13              INTEGER ::= 32  -- Maximum number of WLAN identifiers
maxWLAN-Channels-r13        INTEGER ::= 16  -- maximum number of WLAN channels used in
                                            -- WLAN-CarrierInfo
maxWLAN-CarrierInfo-r13     INTEGER ::= 8   -- Maximum number of WLAN Carrier Information

-- ASN1STOP
```

NOTE: The value of maxDRB aligns with SA2.

– End of EUTRA-RRC-Definitions

```
-- ASN1START

END

-- ASN1STOP
```

6.5 PC5 RRC messages

NOTE: The messages included in this section reflect the current status of the discussions. Additional messages may be included at a later stage.

6.5.1 General message structure

– *PC5-RRC-Definitions*

This ASN.1 segment is the start of the PC5 RRC PDU definitions.

```
-- ASN1START

PC5-RRC-Definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    TDD-ConfigSL-r12
FROM EUTRA-RRC-Definitions;

-- ASN1STOP
```

– *SBCCH-SL-BCH-Message*

The *SBCCH-SL-BCH-Message* class is the set of RRC messages that may be sent from the UE to the UE via SL-BCH on the SBCCH logical channel.

```
-- ASN1START

SBCCH-SL-BCH-Message ::= SEQUENCE {
    message                 SBCCH-SL-BCH-MessageType
}

SBCCH-SL-BCH-MessageType ::=                        MasterInformationBlock-SL

-- ASN1STOP
```

6.5.2 Message definitions

– *MasterInformationBlock-SL*

The *MasterInformationBlock-SL* includes the information transmitted by a UE transmitting SLSS, i.e. acting as synchronisation reference, via SL-BCH.

DAINGEAN_0002291

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: SBCCH

Direction: UE to UE

MasterInformationBlock-SL

```
-- ASN1START

MasterInformationBlock-SL ::=       SEQUENCE {
    sl-Bandwidth-r12                    ENUMERATED {
                                            n6, n15, n25, n50, n75, n100},
    tdd-ConfigSL-r12                    TDD-ConfigSL-r12,
    directFrameNumber-r12               BIT STRING (SIZE (10)),
    directSubframeNumber-r12            INTEGER (0..9),
    inCoverage-r12                      BOOLEAN,
    reserved-r12                        BIT STRING (SIZE (19))
}


-- ASN1STOP
```

***MasterInformationBlock-SL* field descriptions**
directFrameNumber Indicates the frame number in which SLSS and SL-BCH are transmitted. The subframe in the frame corresponding to *directFrameNumber* is indicated by *directSubframeNumber*.
inCoverage Value *TRUE* indicates that the UE transmitting the *MasterInformationBlock-SL* is in E-UTRAN coverage.
sl-Bandwidth Parameter: transmission bandwidth configuration. n6 corresponds to 6 resource blocks, n15 to 15 resource blocks and so on.

– End of *PC5-RRC-Definitions*

```
-- ASN1START

END

-- ASN1STOP
```

6.6 Direct Indication Information

Direct Indication information is transmitted on MPDCCH using P-RNTI but without associated *Paging* message. Table 6.6-1 defines the Direct Indication information, see TS 36.212 [22, 5.3.3.1.14].

When bit n is set to 1, UE shall behave as if the corresponding field is set in the *Paging* message, see 5.3.2.3. Bit 1 is the least significant bit.

Table 6.6-1: Direct Indication information

Bit	Direct Indication information
1	*systemInfoModification*
2	*etws-Indication*
3	*cmas-Indication*
4	*eab-ParamModification*
5	*systemInfoModification-eDRX*
6, 7, 8	Not used, and shall be ignored by UE if received.

DAINGEAN_0002292

6.7 NB-IoT RRC messages

6.7.1 General NB-IoT message structure

```
-- ASN1START

NBIOT-RRC-Definitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    RRCConnectionReestablishmentReject,
    SecurityModeCommand,
    SecurityModeComplete,
    SecurityModeFailure,
    AdditionalSpectrumEmission,
    ARFCN-ValueEUTRA-r9,
    CellIdentity,
    DedicatedInfoNAS,
    DRB-Identity,
    InitialUE-Identity,
    IntraFreqBlackCellList,
    IntraFreqNeighCellList,
    maxBands,
    maxCellBlack,
    maxCellInter,
    maxFBI2,
    maxFreq,
    maxMultiBands,
    maxPageRec,
    maxPLMN-r11,
    maxSIB,
    maxSIB-1,
    NextHopChainingCount,
    PagingUE-Identity,
    PLMN-Identity,
    P-Max,
    PowerRampingParameters,
    PreambleTransMax,
    PhysCellId,
    Q-OffsetRange,
    Q-QualMin-r9,
    Q-RxLevMin,
    ReestabUE-Identity,
    RegisteredMME,
    ReselectionThreshold,
    ResumeIdentity-r13,
    RRC-TransactionIdentifier,
    RSRP-Range,
    ShortMAC-I,
    S-TMSI,
    SystemInformationBlockType16-r11,
    SystemInfoValueTagSI-r13,
    TimeAlignmentTimer,
    TrackingAreaCode
FROM EUTRA-RRC-Definitions;

-- ASN1STOP
```

– *BCCH-BCH-Message-NB*

The *BCCH-BCH-Message-NB* class is the set of RRC messages that may be sent from the E-UTRAN to the UE via BCH on the BCCH logical channel.

```
-- ASN1START

BCCH-BCH-Message-NB ::= SEQUENCE {
    message                 BCCH-BCH-MessageType-NB
}


BCCH-BCH-MessageType-NB::=  MasterInformationBlock-NB
```


DAINGEAN_0002293

```
-- ASN1STOP
```

– BCCH-DL-SCH-Message-NB

The *BCCH-DL-SCH-Message-NB* class is the set of RRC messages that may be sent from the E-UTRAN to the UE via DL-SCH on the BCCH logical channel.

```
-- ASN1START

BCCH-DL-SCH-Message-NB ::= SEQUENCE {
    message                 BCCH-DL-SCH-MessageType-NB
}

BCCH-DL-SCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        systemInformation-r13               SystemInformation-NB,
        systemInformationBlockType1-r13     SystemInformationBlockType1-NB
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– PCCH-Message-NB

The *PCCH-Message-NB* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the PCCH logical channel.

```
-- ASN1START

PCCH-Message-NB ::= SEQUENCE {
    message                 PCCH-MessageType-NB
}

PCCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        paging-r13                          Paging-NB
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– DL-CCCH-Message-NB

The *DL-CCCH-Message-NB* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the downlink CCCH logical channel.

```
-- ASN1START

DL-CCCH-Message-NB ::= SEQUENCE {
    message                 DL-CCCH-MessageType-NB
}

DL-CCCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        rrcConnectionReestablishment-r13        RRCConnectionReestablishment-NB,
        rrcConnectionReestablishmentReject-r13  RRCConnectionReestablishmentReject,
        rrcConnectionReject-r13                 RRCConnectionReject-NB,
        rrcConnectionSetup-r13                  RRCConnectionSetup-NB,
        spare4 NULL, spare3 NULL, spare2 NULL, spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```


DAINGEAN_0002294

– DL-DCCH-Message-NB

The *DL-DCCH-Message-NB* class is the set of RRC messages that may be sent from the E-UTRAN to the UE on the downlink DCCH logical channel.

```
-- ASN1START

DL-DCCH-Message-NB ::= SEQUENCE {
    message                 DL-DCCH-MessageType-NB
}

DL-DCCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        dlInformationTransfer-r13               DLInformationTransfer-NB,
        rrcConnectionReconfiguration-r13        RRCConnectionReconfiguration-NB,
        rrcConnectionRelease-r13                RRCConnectionRelease-NB,
        securityModeCommand-r13                 SecurityModeCommand,
        ueCapabilityEnquiry-r13                 UECapabilityEnquiry-NB,
        rrcConnectionResume-r13                 RRCConnectionResume-NB,
        spare2 NULL, spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– UL-CCCH-Message-NB

The *UL-CCCH-Message-NB* class is the set of RRC messages that may be sent from the UE to the E-UTRAN on the uplink CCCH logical channel.

```
-- ASN1START


UL-CCCH-Message-NB ::= SEQUENCE {
    message                 UL-CCCH-MessageType-NB
}

UL-CCCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        rrcConnectionReestablishmentRequest-r13 RRCConnectionReestablishmentRequest-NB,
        rrcConnectionRequest-r13                RRCConnectionRequest-NB,
        rrcConnectionResumeRequest-r13          RRCConnectionResumeRequest-NB,
        spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

– UL-DCCH-Message-NB

The *UL-DCCH-Message-NB* class is the set of RRC messages that may be sent from the UE to the E-UTRAN on the uplink DCCH logical channel.

```
-- ASN1START

UL-DCCH-Message-NB ::= SEQUENCE {
    message                 UL-DCCH-MessageType-NB
}

UL-DCCH-MessageType-NB ::= CHOICE {
    c1                      CHOICE {
        rrcConnectionReconfigurationComplete-r13    RRCConnectionReconfigurationComplete-NB,
        rrcConnectionReestablishmentComplete-r13    RRCConnectionReestablishmentComplete-NB,
        rrcConnectionSetupComplete-r13              RRCConnectionSetupComplete-NB,
        securityModeComplete-r13                    SecurityModeComplete,
        securityModeFailure-r13                     SecurityModeFailure,
        ueCapabilityInformation-r13                 UECapabilityInformation-NB,
        ulInformationTransfer-r13                   ULInformationTransfer-NB,
```


DAINGEAN_0002295

```
        rrcConnectionResumeComplete-r13             RRCConnectionResumeComplete-NB,
        spare8 NULL, spare7 NULL,
        spare6 NULL, spare5 NULL, spare4 NULL,
        spare3 NULL, spare2 NULL, spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

6.7.2 NB-IoT Message definitions

– *DLInformationTransfer-NB*

The *DLInformationTransfer-NB* message is used for the downlink transfer of NAS dedicated information.

Signalling radio bearer: SRB1or SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

***DLInformationTransfer-NB* message**

```
-- ASN1START

DLInformationTransfer-NB ::=    SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            dlInformationTransfer-r13       DLInformationTransfer-NB-r13-IEs,
            spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

DLInformationTransfer-NB-r13-IEs ::=    SEQUENCE {
    dedicatedInfoNAS-r13                    DedicatedInfoNAS,
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

– *MasterInformationBlock-NB*

The *MasterInformationBlock-NB* includes the system information transmitted on BCH.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: BCCH

Direction: E-UTRAN to UE

MasterInformationBlock-NB

```
-- ASN1START

MasterInformationBlock-NB ::=   SEQUENCE {
    systemFrameNumber-MSB-r13       BIT STRING (SIZE (4)),
```


DAINGEAN_0002296

```
    hyperSFN-LSB-r13                BIT STRING (SIZE (2)),
    schedulingInfoSIB1-r13          INTEGER (0..15),
    systemInfoValueTag-r13          INTEGER (0..31),
    ab-Enabled-r13                  BOOLEAN,
    operationModeInfo-r13           CHOICE {
        inband-SamePCI-r13              Inband-SamePCI-NB-r13,
        inband-DifferentPCI-r13         Inband-DifferentPCI-NB-r13,
        guardband-r13                   Guardband-NB-r13,
        standalone-r13                  Standalone-NB-r13
    },
    spare                           BIT STRING (SIZE (11))
}

ChannelRasterOffset-NB-r13 ::= ENUMERATED {khz-7dot5, khz-2dot5, khz2dot5, khz7dot5}

Guardband-NB-r13 ::=            SEQUENCE {
    rasterOffset-r13                ChannelRasterOffset-NB-r13,
    spare                            BIT STRING (SIZE (3))
}

Inband-SamePCI-NB-r13 ::=       SEQUENCE {
    eutra-CRS-SequenceInfo-r13      INTEGER (0..31)
}

Inband-DifferentPCI-NB-r13 ::=  SEQUENCE {
    eutra-NumCRS-Ports-r13          ENUMERATED {same, four},
    rasterOffset-r13                ChannelRasterOffset-NB-r13,
    spare                           BIT STRING (SIZE (2))
}

Standalone-NB-r13 ::=           SEQUENCE {
    spare                           BIT STRING (SIZE (5))
}

-- ASN1STOP
```

***MasterInformationBlock-NB* field descriptions**
ab-Enabled Value TRUE indicates that access barring is enabled and that the UE shall acquire *SystemInformationBlockType14-NB* before initiating RRC connection establishment or resume.
eutra-CRS-SequenceInfo Information of the carrier containing NPSS/NSSS/NPBCH. Each value is associated with an E-UTRA PRB index as an offset from the middle of the LTE system sorted out by channel raster offset. See TS 36.211[21] and TS 36.213 [23].
eutra-NumCRS-Ports Number of E-UTRA CRS antenna ports, either the same number of ports as NRS or 4 antenna ports. See TS 36.211 [21], TS 36.212 [22], and TS 36.213 [23].
hyperSFN-LSB Indicates the 2 least significant bits of hyper SFN. The remaining bits are present in *SystemInformationBlockType1-NB*.
operationModeInfo Deployment scenario (in-band/guard-band/standalone) and related information. *Inband-SamePCI* indicates an in-band deployment and that the NB-IoT and LTE cell share the same physical cell id and have the same number of NRS and CRS ports. *Inband-DifferentPCI* indicates an in-band deployment and that the NB-IoT and LTE cell have different physical cell id. *guardband* indicates a guard-band deployment. *standalone* indicates a standalone deployment.
rasterOffset NB-IoT offset from LTE channel raster. Unit in kHz in set { -7.5, -2.5, 2.5, 7.5} See TS 36.211[21] and TS 36.213 [23].
schedulingInfoSIB1 This field contains an index to a table specified in TS 36.213 [23, Table 16.4.1.3-3] that defines *SystemInformationBlockType1-NB* scheduling information.
systemFrameNumber-MSB Defines the 4 most significant bits of the SFN. As indicated in TS 36.211 [21], the 6 least significant bits of the SFN are acquired implicitly by decoding the NPBCH.
systemInfoValueTag Common for all SIBs other than MIB-NB, SIB14-NB and SIB16-NB.

DAINGEAN_0002297

– *Paging-NB*

The *Paging-NB* message is used for the notification of one or more UEs.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: PCCH

Direction: E-UTRAN to UE

Paging-NB message

```
-- ASN1START

Paging-NB ::=                       SEQUENCE {
    pagingRecordList-r13                PagingRecordList-NB-r13         OPTIONAL,   -- Need ON
    systemInfoModification-r13          ENUMERATED {true}               OPTIONAL,   -- Need ON
    systemInfoModification-eDRX-r13     ENUMERATED {true}               OPTIONAL,   -- Need ON
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

PagingRecordList-NB-r13 ::=         SEQUENCE (SIZE (1..maxPageRec)) OF PagingRecord-NB-r13

PagingRecord-NB-r13 ::=             SEQUENCE {
    ue-Identity-r13                     PagingUE-Identity,
    ...
}

-- ASN1STOP
```

Paging-NB field descriptions
systemInfoModification   If present: indication of a BCCH modification other than for *SystemInformationBlockType14-NB* (SIB14-NB) and *SystemInformationBlockType16-NB* (SIB16-NB). This indication does not apply to UEs using eDRX cycle longer than the BCCH modification period.
systemInfoModification-eDRX   If present: indication of a BCCH modification other than for *SystemInformationBlockType14-NB* (SIB14-NB) and *SystemInformationBlockType16-NB* (SIB16-NB). This indication applies only to UEs using eDRX cycle longer than the BCCH modification period.
ue-Identity   Provides the NAS identity of the UE that is being paged.

– *RRCConnectionReconfiguration-NB*

The *RRCConnectionReconfiguration-NB* message is the command to modify an RRC connection. It may convey information for resource configuration (including RBs, MAC main configuration and physical channel configuration) including any associated dedicated NAS information.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

RRCConnectionReconfiguration-NB message

```
-- ASN1START

RRCConnectionReconfiguration-NB ::= SEQUENCE {
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    criticalExtensions                      CHOICE {
        c1                                      CHOICE{
            rrcConnectionReconfiguration-r13        RRCConnectionReconfiguration-NB-r13-IEs,
            spare1 NULL
```


DAINGEAN_0002298

```
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReconfiguration-NB-r13-IEs ::= SEQUENCE {
    dedicatedInfoNASList-r13            SEQUENCE (SIZE(1..maxDRB-NB-r13)) OF
                                            DedicatedInfoNAS        OPTIONAL,   -- Need ON
    radioResourceConfigDedicated-r13    RadioResourceConfigDedicated-NB-r13 OPTIONAL,   -- Need ON
    fullConfig-r13                      ENUMERATED {true}                   OPTIONAL,   -- Cond
Reestab
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {} OPTIONAL
}

-- ASN1STOP
```

***RRCConnectionReconfiguration-NB* field descriptions**
dedicatedInfoNASList
This field is used to transfer UE specific NAS layer information between the network and the UE. The RRC layer is transparent for each PDU in the list.
fullConfig
Indicates the full configuration option is applicable for the RRC Connection Reconfiguration message.

Conditional presence	Explanation
Reestab	This field is optionally present, need ON upon the first reconfiguration after RRC connection re-establishment; otherwise the field is not present.

– *RRCConnectionReconfigurationComplete-NB*

The *RRCConnectionReconfigurationComplete-NB* message is used to confirm the successful completion of an RRC connection reconfiguration.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionReconfigurationComplete-NB message

```
-- ASN1START

RRCConnectionReconfigurationComplete-NB ::= SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                      CHOICE {
        rrcConnectionReconfigurationComplete-r13    RRCConnectionReconfigurationComplete-NB-r13-IEs,
        criticalExtensionsFuture                    SEQUENCE {}
    }
}

RRCConnectionReconfigurationComplete-NB-r13-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionReestablishment-NB*

The *RRCConnectionReestablishment-NB* message is used to re-establish SRB1.

DAINGEAN_0002299

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

***RRCConnectionReestablishment-NB* message**

```
-- ASN1START

RRCConnectionReestablishment-NB ::= SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            rrcConnectionReestablishment-r13    RRCConnectionReestablishment-NB-r13-IEs,
            spare1  NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReestablishment-NB-r13-IEs ::= SEQUENCE {
    radioResourceConfigDedicated-r13            RadioResourceConfigDedicated-NB-r13,
    nextHopChainingCount-r13                    NextHopChainingCount,
    lateNonCriticalExtension                    OCTET STRING                        OPTIONAL,
    nonCriticalExtension                        SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionReestablishmentComplete-NB*

The *RRCConnectionReestablishmentComplete-NB* message is used to confirm the successful completion of an RRC connection reestablishment.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

***RRCConnectionReestablishmentComplete-NB* message**

```
-- ASN1START

RRCConnectionReestablishmentComplete-NB ::= SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        rrcConnectionReestablishmentComplete-r13    RRCConnectionReestablishmentComplete-NB-r13-IEs,
        criticalExtensionsFuture                    SEQUENCE {}
    }
}

RRCConnectionReestablishmentComplete-NB-r13-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

– *RRCConnectionReestablishmentRequest-NB*

The *RRCConnectionReestablishmentRequest-NB* message is used to request the reestablishment of an RRC connection.

DAINGEAN_0002300

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

RRCConnectionReestablishmentRequest-NB message

```
-- ASN1START

RRCConnectionReestablishmentRequest-NB ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        rrcConnectionReestablishmentRequest-r13
                                            RRCConnectionReestablishmentRequest-NB-r13-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReestablishmentRequest-NB-r13-IEs ::= SEQUENCE {
    ue-Identity-r13                     ReestabUE-Identity,
    reestablishmentCause-r13            ReestablishmentCause-NB-r13,
    spare                               BIT STRING (SIZE (25))
}


ReestablishmentCause-NB-r13 ::=         ENUMERATED {
                                            reconfigurationFailure, otherFailure,
                                            spare2, spare1}

-- ASN1STOP
```

RRCConnectionReestablishmentRequest-NB field descriptions
reestablishmentCause
Indicates the failure cause that triggered the re-establishment procedure.
eNB is not expected to reject a *RRCConnectionReestablishmentRequest* due to unknown cause value being used by the UE.
ue-Identity
UE identity included to retrieve UE context and to facilitate contention resolution by lower layers.

– *RRCConnectionReject-NB*

The *RRCConnectionReject-NB* message is used to reject the RRC connection establishment or RRC connection resume.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionReject-NB message

```
-- ASN1START

RRCConnectionReject-NB ::=              SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionReject-r13             RRCConnectionReject-NB-r13-IEs,
            spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReject-NB-r13-IEs ::=      SEQUENCE {
    extendedWaitTime-r13                    INTEGER (1..1800),
    rrc-SuspendIndication-r13               ENUMERATED {true}           OPTIONAL,   -- Need ON
```


DAINGEAN_0002301

```
    lateNonCriticalExtension            OCTET STRING                OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                 OPTIONAL
}

-- ASN1STOP
```

***RRCConnectionReject-NB* field descriptions**
extendedWaitTime Value in seconds.
rrc-SuspendIndication If present, this field indicates that the UE should remain suspended and not release its stored context.

– *RRCConnectionRelease-NB*

The *RRCConnectionRelease-NB* message is used to command the release of an RRC connection.

Signalling radio bearer: SRB1 or SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

RRCConnectionRelease-NB message

```
-- ASN1START

RRCConnectionRelease-NB ::=     SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionRelease-r13            RRCConnectionRelease-NB-r13-IEs,
            spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionRelease-NB-r13-IEs ::= SEQUENCE {
    releaseCause-r13                    ReleaseCause-NB-r13,
    resumeIdentity-r13                  ResumeIdentity-r13              OPTIONAL,   -- Need OR
    extendedWaitTime-r13                INTEGER (1..1800)               OPTIONAL,   -- Need ON
    redirectedCarrierInfo-r13           RedirectedCarrierInfo-NB-r13    OPTIONAL,   -- Need ON
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}


ReleaseCause-NB-r13 ::=             ENUMERATED {loadBalancingTAUrequired, other,
                                                rrc-Suspend, spare1}

RedirectedCarrierInfo-NB-r13::=     CarrierFreq-NB-r13
-- ASN1STOP
```

***RRCConnectionRelease-NB* field descriptions**
extendedWaitTime Value in seconds.
redirectedCarrierInfo The *redirectedCarrierInfo* indicates a carrier frequency (downlink for FDD) and is used to redirect the UE to a NB-IoT carrier frequency, by means of the cell selection upon leaving RRC_CONNECTED as specified in TS 36.304 [4].
releaseCause The *releaseCause* is used to indicate the reason for releasing the RRC Connection. E-UTRAN should not set the *releaseCause* to *loadBalancingTAURequired* if the *extendedWaitTime* is present.

DAINGEAN_0002302

– *RRCConnectionRequest-NB*

The *RRCConnectionRequest-NB* message is used to request the establishment of an RRC connection.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

RRCConnectionRequest-NB message

```
-- ASN1START

RRCConnectionRequest-NB ::=     SEQUENCE {
    criticalExtensions                  CHOICE {
        rrcConnectionRequest-r13            RRCConnectionRequest-NB-r13-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionRequest-NB-r13-IEs ::=     SEQUENCE {
    ue-Identity-r13                     InitialUE-Identity,
    establishmentCause-r13              EstablishmentCause-NB-r13,
    multiToneSupport-r13                ENUMERATED {true}               OPTIONAL,
    multiCarrierSupport-r13             ENUMERATED {true}               OPTIONAL,
    spare                               BIT STRING (SIZE (22))
}

-- ASN1STOP
```

RRCConnectionRequest-NB field descriptions
establishmentCause
Provides the establishment cause for the RRC connection request as provided by the upper layers.
eNB is not expected to reject a *RRCConnectionRequest* due to unknown cause value being used by the UE.
multiCarrierSupport
If present, this field indicates that the UE supports multi-carrier operation.
multiToneSupport
If present, this field indicates that the UE supports UL multi-tone transmissions on NPUSCH.
ue-Identity
UE identity included to facilitate contention resolution by lower layers.

– *RRCConnectionResume-NB*

The *RRCConnectionResume-NB* message is used to resume the suspended RRC connection.

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

RRCConnectionResume-NB message

```
-- ASN1START

RRCConnectionResume-NB ::=      SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionResume-r13             RRCConnectionResume-NB-r13-IEs,
            spare1                              NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
```


DAINGEAN_0002303

```
}

RRCConnectionResume-NB-r13-IEs ::=      SEQUENCE {
    radioResourceConfigDedicated-r13        RadioResourceConfigDedicated-NB-r13 OPTIONAL,       --
Need ON
    nextHopChainingCount-r13                NextHopChainingCount,
    drb-ContinueROHC-r13                    ENUMERATED {true}                   OPTIONAL,   -- Need OP
    lateNonCriticalExtension                OCTET STRING                        OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

RRCConnectionResume-NB field descriptions

drb-ContinueROHC
This field indicates whether to continue or reset the header compression protocol context for the DRBs configured with the header compression protocol. Presence of the field indicates that the header compression protocol context continues while absence indicates that the header compression protocol context is reset.

– *RRCConnectionResumeComplete-NB*

The *RRCConnectionResumeComplete-NB* message is used to confirm the successful completion of an RRC connection resumption

Signalling radio bearer: SRB1

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionResumeComplete-NB message

```
-- ASN1START

RRCConnectionResumeComplete-NB ::= SEQUENCE {
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    criticalExtensions                          CHOICE {
        rrcConnectionResumeComplete-r13             RRCConnectionResumeComplete-NB-r13-IEs,
        criticalExtensionsFuture                    SEQUENCE {}
    }
}

RRCConnectionResumeComplete-NB-r13-IEs ::= SEQUENCE {
    selectedPLMN-Identity-r13                   INTEGER (1..maxPLMN-r11) OPTIONAL,
    dedicatedInfoNAS-r13                        DedicatedInfoNAS   OPTIONAL,
    lateNonCriticalExtension                    OCTET STRING                    OPTIONAL,
    nonCriticalExtension                        SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

RRCConnectionResumeComplete-NB field descriptions

selectedPLMN-Identity
Index of the PLMN selected by the UE from the *plmn-IdentityList* included in *SystemInformationBlockType1-NB*. 1 if the 1st PLMN is selected from the *plmn-IdentityList* included in SIB1-NB, 2 if the 2nd PLMN is selected from the *plmn-IdentityList* included in SIB1-NB and so on.

– *RRCConnectionResumeRequest-NB*

The *RRCConnectionResumeRequest-NB* message is used to request the resumption of a suspended RRC connection.

DAINGEAN_0002304

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: UE to E-UTRAN

RRCConnectionResumeRequest-NB message

```
-- ASN1START

RRCConnectionResumeRequest-NB ::=   SEQUENCE {
    criticalExtensions                      CHOICE {
        rrcConnectionResumeRequest-r13          RRCConnectionResumeRequest-NB-r13-IEs,
        criticalExtensionsFuture                SEQUENCE {}
    }
}

RRCConnectionResumeRequest-NB-r13-IEs ::=   SEQUENCE {
    resumeID-r13                                ResumeIdentity-r13,
    shortResumeMAC-I-r13                            ShortMAC-I,
    resumeCause-r13                             EstablishmentCause-NB-r13,
    spare                                       BIT STRING (SIZE (9))
}

-- ASN1STOP
```

RRCConnectionResumeRequest-NB field descriptions
resumeCause   Provides the resume cause for the RRC connection resume request as provided by the upper layers.   eNB is not expected to reject a *RRCConnectionResumeRequest* due to unknown cause value being used by the UE.
resumeID   UE identity to facilitate UE context retrieval at eNB.
shortResumeMAC-I   Authentication token to facilitate UE authentication at eNB.

– *RRCConnectionSetup-NB*

The *RRCConnectionSetup-NB* message is used to establish SRB1 and SRB1bis.

Signalling radio bearer: SRB0

RLC-SAP: TM

Logical channel: CCCH

Direction: E-UTRAN to UE

RRCConnectionSetup-NB message

```
-- ASN1START

RRCConnectionSetup-NB ::=       SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            rrcConnectionSetup-r13              RRCConnectionSetup-NB-r13-IEs,
            spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionSetup-NB-r13-IEs ::=       SEQUENCE {
    radioResourceConfigDedicated-r13        RadioResourceConfigDedicated-NB-r13,
    lateNonCriticalExtension                OCTET STRING                        OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                         OPTIONAL
}
```


DAINGEAN_0002305

```
-- ASN1STOP
```

– RRCConnectionSetupComplete-NB

The *RRCConnectionSetupComplete-NB* message is used to confirm the successful completion of an RRC connection establishment.

Signalling radio bearer: SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

RRCConnectionSetupComplete-NB message

```
-- ASN1START

RRCConnectionSetupComplete-NB ::=   SEQUENCE {
    rrc-TransactionIdentifier              RRC-TransactionIdentifier,
    criticalExtensions                     CHOICE{
            rrcConnectionSetupComplete-r13      RRCConnectionSetupComplete-NB-r13-IEs,
            criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionSetupComplete-NB-r13-IEs ::= SEQUENCE {
    selectedPLMN-Identity-r13              INTEGER (1..maxPLMN-r11),
    s-TMSI-r13                             S-TMSI                          OPTIONAL,
    registeredMME-r13                      RegisteredMME                   OPTIONAL,
    dedicatedInfoNAS-r13                   DedicatedInfoNAS,
    attachWithoutPDN-Connectivity-r13      ENUMERATED {true}               OPTIONAL,
    up-CIoT-EPS-Optimisation-r13           ENUMERATED {true}               OPTIONAL,
    lateNonCriticalExtension               OCTET STRING                    OPTIONAL,
    nonCriticalExtension                   SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

RRCConnectionSetupComplete-NB field descriptions
attachWithoutPDN-Connectivity
This field is used to indicate that the UE performs an Attach without PDN connectivity procedure, as indicated by the upper layers, TS 24.301 [35].
registeredMME
This field is used to transfer the GUMMEI of the MME where the UE is registered, as provided by upper layers.
selectedPLMN-Identity
Index of the PLMN selected by the UE from the *plmn-IdentityList* included in *SystemInformationBlockType1-NB*. 1 if the 1st PLMN is selected from the *plmn-IdentityList* included in SIB1, 2 if the 2nd PLMN is selected from the *plmn-IdentityList* included in SIB1 and so on.
up-CIoT-EPS-Optimisation
This field is included when the UE establishes the connection with cause mo-signalling and the UE supports the User plane CIoT EPS Optimisation, see TS 24.301 [35].

– SystemInformation-NB

The *SystemInformation-NB* message is used to convey one or more System Information Blocks. All the SIBs included are transmitted with the same periodicity.

DAINGEAN_0002306

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: BCCH

Direction: E-UTRAN to UE

SystemInformation-NB message

```
-- ASN1START

SystemInformation-NB ::=          SEQUENCE {
    criticalExtensions                    CHOICE {
        systemInformation-r13                 SystemInformation-NB-r13-IEs,
        criticalExtensionsFuture              SEQUENCE {}
    }
}
SystemInformation-NB-r13-IEs ::=    SEQUENCE {
    sib-TypeAndInfo-r13                   SEQUENCE (SIZE (1..maxSIB)) OF CHOICE {
        sib2-r13                              SystemInformationBlockType2-NB-r13,
        sib3-r13                              SystemInformationBlockType3-NB-r13,
        sib4-r13                              SystemInformationBlockType4-NB-r13,
        sib5-r13                              SystemInformationBlockType5-NB-r13,
        sib14-r13                             SystemInformationBlockType14-NB-r13,
        sib16-r13                             SystemInformationBlockType16-NB-r13,
        ...
    },
    lateNonCriticalExtension              OCTET STRING                          OPTIONAL,
    nonCriticalExtension                  SEQUENCE {}                           OPTIONAL
}

-- ASN1STOP
```

– *SystemInformationBlockType1-NB*

The *SystemInformationBlockType1-NB* message contains information relevant when evaluating if a UE is allowed to access a cell and defines the scheduling of other system information.

Signalling radio bearer: N/A

RLC-SAP: TM

Logical channel: BCCH

Direction: E-UTRAN to UE

SystemInformationBlockType1-NB message

```
-- ASN1START

SystemInformationBlockType1-NB ::=  SEQUENCE {
    hyperSFN-MSB-r13                      BIT STRING (SIZE (8)),
    cellAccessRelatedInfo-r13             SEQUENCE {
        plmn-IdentityList-r13                 PLMN-IdentityList-NB-r13,
        trackingAreaCode-r13                  TrackingAreaCode,
        cellIdentity-r13                      CellIdentity,
        cellBarred-r13                        ENUMERATED {barred, notBarred},
        intraFreqReselection-r13              ENUMERATED {allowed, notAllowed}
    },
    cellSelectionInfo-r13                 SEQUENCE {
        q-RxLevMin-r13                        Q-RxLevMin,
        q-QualMin-r13                         Q-QualMin-r9
    },
    p-Max-r13                             P-Max                   OPTIONAL,   -- Need OP
    freqBandIndicator-r13                 FreqBandIndicator-NB-r13,
    freqBandInfo-r13                      NS-PmaxList-NB-r13              OPTIONAL,   -- Need OR
    multiBandInfoList-r13                 MultiBandInfoList-NB-r13        OPTIONAL,   -- Need OR
    downlinkBitmap-r13                    DL-Bitmap-NB-r13                OPTIONAL,   -- Need OP,
    eutraControlRegionSize-r13            ENUMERATED {n1, n2, n3}         OPTIONAL,   -- Cond inband
    nrs-CRS-PowerOffset-r13               ENUMERATED {dB-6,      dB-4dot77, dB-3,
                                                      dB-1dot77, dB0,       dB1,
```


DAINGEAN_0002307

```
                                                dB1dot23,  dB2,       dB3,
                                                dB4,       dB4dot23,  dB5,
                                                dB6,       dB7,       dB8,
                                                dB9}       OPTIONAL,   -- Cond inband-SamePCI
    schedulingInfoList-r13              SchedulingInfoList-NB-r13,
    si-WindowLength-r13                 ENUMERATED {ms160,  ms320,  ms480,  ms640,
                                                    ms960,  ms1280, ms1600, spare1},
    si-RadioFrameOffset-r13             INTEGER (1..15)     OPTIONAL,   -- Need OP
    systemInfoValueTagList-r13          SystemInfoValueTagList-NB-r13   OPTIONAL,   -- Need OR
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

PLMN-IdentityList-NB-r13 ::=        SEQUENCE (SIZE (1..maxPLMN-r11)) OF PLMN-IdentityInfo-NB-r13

PLMN-IdentityInfo-NB-r13 ::=        SEQUENCE {
    plmn-Identity-r13                       PLMN-Identity,
    cellReservedForOperatorUse-r13          ENUMERATED {reserved, notReserved},
    attachWithoutPDN-Connectivity-r13       ENUMERATED {true}   OPTIONAL    -- Need OP
}

SchedulingInfoList-NB-r13 ::= SEQUENCE (SIZE (1..maxSI-Message-NB-r13)) OF SchedulingInfo-NB-r13

SchedulingInfo-NB-r13::=        SEQUENCE {
    si-Periodicity-r13              ENUMERATED {rf64, rf128, rf256, rf512,
                                                rf1024, rf2048, rf4096, spare},
    si-RepetitionPattern-r13            ENUMERATED {every2ndRF, every4thRF,
                                                    every8thRF,  every16thRF},
    sib-MappingInfo-r13             SIB-MappingInfo-NB-r13,
    si-TB-r13           ENUMERATED {b56, b120, b208, b256, b328, b440, b552, b680}
}

SystemInfoValueTagList-NB-r13 ::=   SEQUENCE (SIZE (1.. maxSI-Message-NB-r13)) OF
                                        SystemInfoValueTagSI-r13

SIB-MappingInfo-NB-r13 ::=          SEQUENCE (SIZE (0..maxSIB-1)) OF SIB-Type-NB-r13

SIB-Type-NB-r13 ::=                 ENUMERATED {
                                        sibType3-NB-r13, sibType4-NB-r13, sibType5-NB-r13,
                                        sibType14-NB-r13, sibType16-NB-r13, spare3, spare2, spare1}


-- ASN1STOP
```


DAINGEAN_0002308

***SystemInformationBlockType1-NB* field descriptions**
attachWithoutPDN-Connectivity If present, the field indicates that attach without PDN connectivity as specified in TS 24.301 [35] is supported for this PLMN.
cellBarred Barred means the cell is barred, as defined in TS 36.304 [4].
cellIdentity Indicates the cell identity.
cellReservedForOperatorUse As defined in TS 36.304 [4].
cellSelectionInfo Cell selection information as specified in TS 36.304 [4].
downlinkBitmapNB-IoT downlink subframe configuration for downlink transmission. If the bitmap is not present, the UE shall assume that all subframes are valid (except for subframes carrying NPSS/NSSS/NPBCH/SIB1-NB) as specified in TS 36.213[23].
eutraControlRegionSize Indicates the control region size of the E-UTRA cell for the in-band operation mode. Unit is in number of OFDM symbols.
freqBandIndicator A list of as defined in TS 36.101 [42, table 6.2.4-1] for the frequency band in *freqBandIndicator*.
freqBandInfo A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] for the frequency band in *freqBandIndicator*.
hyperSFN-MSB Indicates the 8 most significat bits of hyper-SFN. Together with hyperSFN-LSB in MIB-NB, the complete hyper-SFN is built up. hyper-SFN is incremented by one when the SFN wraps around.
intraFreqReselection Used to control cell reselection to intra-frequency cells when the highest ranked cell is barred, or treated as barred by the UE, as specified in TS 36.304 [4].
multiBandInfoList A list of additional frequency band indicators, *additionalPmax* and *additionalSpectrumEmission* values, as defined in TS 36.101 [42, table 5.5-1]. If the UE supports the frequency band in the *freqBandIndicator* IE it shall apply that frequency band. Otherwise, the UE shall apply the first listed band which it supports in the *multiBandInfoList* IE.
nrs-CRS-PowerOffset NRS power offset between NRS and E-UTRA CRS. Unit in dB. Default value of 0.
plmn-IdentityList List of PLMN identities. The first listed *PLMN-Identity* is the primary PLMN.
p-Max Value applicable for the cell. If absent the UE applies the maximum power according to the UE capability.
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4].
q-RxLevMin Parameter $Q_{rxlevmin}$ in TS 36.304 [4]. Actual value $Q_{rxlevmin}$ = IE value * 2 [dB].
schedulingInfoList Indicates additional scheduling information of SI messages.
si-Periodicity Periodicity of the SI-message in radio frames, such that rf256 denotes 256 radio frames, rf512 denotes 512 radio frames, and so on.
si-RadioFrameOffset Offset in number of radio frames to calculate the start of the SI window. If the field is absent, no offset is applied.
si-RepetitionPattern Indicates the starting radio frames within the SI window used for SI message transmission. Value every2ndRF corresponds to every second radio frame, value every4thRF corresponds to every fourth radio frame and so on starting from the first radio frame of the SI window used for SI transmission.
si-TB This field indicates the transport block size in number of bits used to broadcast the SI message.
si-WindowLength Common SI scheduling window for all SIs. Unit in milliseconds, where ms160 denotes 160 milliseconds, ms320 denotes 320 milliseconds and so on.
sib-MappingInfo List of the SIBs mapped to this *SystemInformation* message.There is no mapping information of SIB2; it is always present in the first *SystemInformation* message listed in the *schedulingInfoList* list.
systemInfoValueTagList Indicates SI message specific value tags. It includes the same number of entries, and listed in the same order, as in SchedulingInfoList.
systemInfoValueTagSI

DAINGEAN_0002309

***SystemInformationBlockType1-NB* field descriptions**
SI message specific value tag as specified in Clause 5.2.1.3. Common for all SIBs within the SI message other than SIB14.
trackingAreaCode A *trackingAreaCode* that is common for all the PLMNs listed.

Conditional presence	Explanation
inband	The field is mandatory present if IE *operationModeInfo* in MIB-NB is set to *inband-SamePCI* or *inband-DifferentPCI*. Otherwise the field is not present.
inband-SamePCI	The field is mandatory present, if IE *operationModeInfo* in MIB-NB is set *to inband-SamePCI*. Otherwise the field is not present.

– *UECapabilityEnquiry-NB*

The *UECapabilityEnquiry-NB* message is used to request the transfer of UE radio access capabilities for NB-IoT.

Signalling radio bearer: SRB1 or SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: E-UTRAN to UE

***UECapabilityEnquiry-NB* message**

```
-- ASN1START

UECapabilityEnquiry-NB ::=  SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE {
            ueCapabilityEnquiry-r13             UECapabilityEnquiry-NB-r13-IEs,
            spare1                              NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UECapabilityEnquiry-NB-r13-IEs ::=  SEQUENCE {
    lateNonCriticalExtension            OCTET STRING                        OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

– *UECapabilityInformation-NB*

The *UECapabilityInformation-NB* message is used to transfer of UE radio access capabilities requested by the E-UTRAN.

Signalling radio bearer: SRB1 or SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

***UECapabilityInformation-NB* message**

```
-- ASN1START

UECapabilityInformation-NB ::=  SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE{
```


DAINGEAN_0002310

```
            ueCapabilityInformation-r13     UECapabilityInformation-NB-r13-IEs,
            criticalExtensionsFuture        SEQUENCE {}
    }
}

UECapabilityInformation-NB-r13-IEs ::=  SEQUENCE {
    ue-Capability-Container-r13             UE-Capability-NB-r13,
    ue-RadioPagingInfo-r13                  UE-RadioPagingInfo-NB-r13,
    lateNonCriticalExtension                OCTET STRING                        OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***UECapabilityInformation-NB* field descriptions**
ue-RadioPagingInfo
This field contains UE capability information used for paging.

– *ULInformationTransfer-NB*

The *ULInformationTransfer-NB* message is used for the uplink transfer of NAS information.

Signalling radio bearer: SRB1 or SRB1bis

RLC-SAP: AM

Logical channel: DCCH

Direction: UE to E-UTRAN

***ULInformationTransfer-NB* message**

```
-- ASN1START

ULInformationTransfer-NB ::=    SEQUENCE {
    criticalExtensions                  CHOICE {
            ulInformationTransfer-r13       ULInformationTransfer-NB-r13-IEs,
            criticalExtensionsFuture        SEQUENCE {}
    }
}

ULInformationTransfer-NB-r13-IEs ::=    SEQUENCE {
    dedicatedInfoNAS-r13                    DedicatedInfoNAS,
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

6.7.3 NB-IoT information elements

6.7.3.1 NB-IoT System information blocks

– *SystemInformationBlockType2-NB*

The IE *SystemInformationBlockType2-NB* contains radio resource configuration information that is common for all UEs.

NOTE: UE timers and constants related to functionality for which parameters are provided in another SIB are included in the corresponding SIB.

***SystemInformationBlockType2-NB* information element**

```
-- ASN1START
```


DAINGEAN_0002311

```
SystemInformationBlockType2-NB-r13 ::=  SEQUENCE {
    radioResourceConfigCommon-r13           RadioResourceConfigCommonSIB-NB-r13,
    ue-TimersAndConstants-r13               UE-TimersAndConstants-NB-r13,
    freqInfo-r13                            SEQUENCE {
        ul-CarrierFreq-r13                      CarrierFreq-NB-r13              OPTIONAL,-- Need OP
        additionalSpectrumEmission-r13          AdditionalSpectrumEmission
    },
    timeAlignmentTimerCommon-r13            TimeAlignmentTimer,
    multiBandInfoList-r13   SEQUENCE (SIZE (1..maxMultiBands)) OF AdditionalSpectrumEmission
    OPTIONAL,-- Need OR
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    ...
}

-- ASN1STOP
```

***SystemInformationBlockType2-NB* field descriptions**
additionalSpectrumEmission
The UE requirements related to **IE *AdditionalSpectrumEmission*** are defined in TS 36.101 [42, table 6.2.4.1].
multiBandInfoList
A list of *additionalSpectrumEmission* i.e. one for each additional frequency band included in *multiBandInfoList* in *SystemInformationBlockType1-NB*, listed in the same order.
ul-CarrierFreq
If absent, the (default) value determined from the default TX-RX frequency separation defined in TS 36.101 [42, table 5.7.3-1] applies.

– *SystemInformationBlockType3-NB*

The IE *SystemInformationBlockType3-NB* contains cell re-selection information common for intra-frequency, and inter-frequency cell re-selection as well as intra-frequency cell re-selection information other than neighbouring cell related.

SystemInformationBlockType3-NB information element

```
-- ASN1START

SystemInformationBlockType3-NB-r13 ::=  SEQUENCE {
    cellReselectionInfoCommon-r13           SEQUENCE {
        q-Hyst-r13                              ENUMERATED {
                                                    dB0, dB1, dB2, dB3, dB4, dB5, dB6, dB8, dB10,
                                                    dB12, dB14, dB16, dB18, dB20, dB22, dB24
                                                    }
    },
    cellReselectionServingFreqInfo-r13      SEQUENCE {
        s-NonIntraSearch-r13                    ReselectionThreshold
    },
    intraFreqCellReselectionInfo-r13        SEQUENCE {
        q-RxLevMin-r13                          Q-RxLevMin,
        q-QualMin-r13                           Q-QualMin-r9            OPTIONAL,   -- Need OP
        p-Max-r13                               P-Max                   OPTIONAL,   -- Need OP
        s-IntraSearchP-r13                      ReselectionThreshold,
        t-Reselection-r13                       T-Reselection-NB-r13
    },
    freqBandInfo-r13                        NS-PmaxList-NB-r13              OPTIONAL,   -- Need OR
    multiBandInfoList-r13                   SEQUENCE (SIZE (1..maxMultiBands)) OF
                                                NS-PmaxList-NB-r13          OPTIONAL,   -- Need OR
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    ...
}

-- ASN1STOP
```


DAINGEAN_0002312

***SystemInformationBlockType3-NB* field descriptions**
multiBandInfoList A list of *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1] applicable for the intra-frequency neighouring NB-IoT cells if the UE selects the frequenby band from *freqBandIndicator* in *SystemInformationBlockType1*.
p-Max Value applicable for the intra-frequency neighbouring E-UTRA cells. If absent the UE applies the maximum power according to the UE capability.
q-Hyst Parameter Q_{hyst} in 36.304 [4], Value in dB. Value dB1 corresponds to 1 dB, dB2 corresponds to 2 dB and so on.
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4], applicable for intra-frequency neighbour cells. If the field is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$.
q-RxLevMin Parameter "$Q_{rxlevmin}$" in TS 36.304 [4], applicable for intra-frequency neighbour cells.
s-IntraSearchP Parameter "$S_{IntraSearchP}$" in TS 36.304 [4].
s-NonIntraSearch Parameter "$S_{nonIntraSearchP}$" in TS 36.304 [4].
t-Reselection Parameter "$Treselection_{NB\text{-}IoT\_Intra}$" in TS 36.304 [4].

– *SystemInformationBlockType4-NB*

The IE *SystemInformationBlockType4-NB* contains neighbouring cell related information relevant only for intra-frequency cell re-selection. The IE includes cells with specific re-selection parameters.

***SystemInformationBlockType4-NB* information element**

```
-- ASN1START

SystemInformationBlockType4-NB-r13 ::=      SEQUENCE {
    intraFreqNeighCellList-r13          IntraFreqNeighCellList  OPTIONAL,   -- Need OR
    intraFreqBlackCellList-r13          IntraFreqBlackCellList  OPTIONAL,   -- Need OR
    lateNonCriticalExtension            OCTET STRING            OPTIONAL,
    ...
}


-- ASN1STOP
```

***SystemInformationBlockType4-NB* field descriptions**
intraFreqBlackCellList List of blacklisted intra-frequency neighbouring cells.
intraFreqNeighCellList List of intra-frequency neighbouring cellswith specific cell re-selection parameters.

– *SystemInformationBlockType5-NB*

The IE *SystemInformationBlockType5-NB* contains information relevant only for inter-frequency cell re-selection i.e. information about other NB-IoT frequencies and inter-frequency neighbouring cells relevant for cell re-selection. The IE includes cell re-selection parameters common for a frequency.

***SystemInformationBlockType5-NB* information element**

```
-- ASN1START

SystemInformationBlockType5-NB-r13 ::=  SEQUENCE {
    interFreqCarrierFreqList-r13            InterFreqCarrierFreqList-NB-r13,
    t-Reselection-r13                       T-Reselection-NB-r13,
    lateNonCriticalExtension                OCTET STRING                    OPTIONAL,
    ...
}
```


DAINGEAN_0002313

```
InterFreqCarrierFreqList-NB-r13 ::=     SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo-NB-
r13


InterFreqCarrierFreqInfo-NB-r13 ::= SEQUENCE {
    dl-CarrierFreq-r13                  CarrierFreq-NB-r13,
    q-RxLevMin-r13                      Q-RxLevMin,
    q-QualMin-r13                       Q-QualMin-r9                    OPTIONAL,       -- Need OP
    p-Max-r13                           P-Max                           OPTIONAL,       -- Need OP
    q-OffsetFreq-r13                    Q-OffsetRange                   DEFAULT dB0,
    interFreqNeighCellList-r13          InterFreqNeighCellList-NB-r13   OPTIONAL,       -- Need OR
    interFreqBlackCellList-r13          InterFreqBlackCellList-NB-r13   OPTIONAL,       -- Need OR
    multiBandInfoList-r13               MultiBandInfoList-NB-r13        OPTIONAL,       -- Need OR
    ...
}

InterFreqNeighCellList-NB-r13 ::=       SEQUENCE (SIZE (1..maxCellInter)) OF PhysCellId


InterFreqBlackCellList-NB-r13 ::=       SEQUENCE (SIZE (1..maxCellBlack)) OF PhysCellId


-- ASN1STOP
```

***SystemInformationBlockType5-NB* field descriptions**
p-Max Value applicable for the neighbouring NB-IoT cells on this carrier frequency. If absent the UE applies the maximum power according to the UE capability.
interFreqBlackCellList List of blacklisted inter-frequency neighbouring cells.
interFreqCarrierFreqList List of neighbouring inter-frequencies. E-UTRAN does not configure more than one entry for the same physical frequency regardless of the E-ARFCN used to indicate this.
interFreqNeighCellList List of inter-frequency neighbouring cells.
multiBandInfoList Indicates the list of frequency bands, with the associated *additionalPmax* and *additionalSpectrumEmission* values as defined in TS 36.101 [42, table 6.2.4-1], in addition to the band represented by *dl-CarrierFreq* for which cell reselection parameters are common.
q-OffsetFreq Parameter "$Qoffset_{frequency}$" in TS 36.304 [4].
q-QualMin Parameter "$Q_{qualmin}$" in TS 36.304 [4]. If the field is not present, the UE applies the (default) value of negative infinity for $Q_{qualmin}$.
q-RxlevMin Parameter "$Q_{RxLevmin}$" in TS 36.304 [4].
t-Reselection Parameter "$Treselection_{NB\text{-}IoT\_Inter}$" in TS 36.304 [4].

– *SystemInformationBlockType14-NB*

The IE *SystemInformationBlockType14-NB* contains the AB parameters.

***SystemInformationBlockType14-NB* information element**

```
-- ASN1START

SystemInformationBlockType14-NB-r13 ::= SEQUENCE {
    ab-Param-r13                    CHOICE {
        ab-Common-r13                   AB-Config-NB-r13,
        ab-PerPLMN-List-r13             SEQUENCE (SIZE (1..maxPLMN-r11)) OF AB-ConfigPLMN-NB-r13
    }                                                                   OPTIONAL, -- Need OR
    lateNonCriticalExtension        OCTET STRING                        OPTIONAL,
    ...
}

AB-ConfigPLMN-NB-r13 ::=    SEQUENCE {
    ab-Config-r13                   AB-Config-NB-r13                    OPTIONAL -- Need OR
}
```


DAINGEAN_0002314

```
AB-Config-NB-r13 ::=        SEQUENCE {
    ab-Category-r13                 ENUMERATED {a, b, c},
    ab-BarringBitmap-r13            BIT STRING (SIZE(10)),
    ab-BarringExceptionData-r13     ENUMERATED {true}           OPTIONAL,   -- Need OP
    ab-BarringForSpecialAC-r13      BIT STRING (SIZE(5))
}

-- ASN1STOP
```

***SystemInformationBlockType14-NB* field descriptions**
ab-BarringBitmap Access class barring for AC 0-9. The first/ leftmost bit is for AC 0, the second bit is for AC 1, and so on.
ab-BarringExceptionData Indicates whether ExceptionData is subject to access barring.
ab-BarringForSpecialAC Access class barring for AC 11-15. The first/ leftmost bit is for AC 11, the second bit is for AC 12, and so on.
ab-Category Indicates the category of UEs for which AB applies. Value *a* corresponds to all UEs, value *b* corresponds to the UEs that are neither in their HPLMN nor in a PLMN that is equivalent to it, and value *c* corresponds to the UEs that are neither in the PLMN listed as most preferred PLMN of the country where the UEs are roaming in the operator-defined PLMN selector list on the USIM, nor in their HPLMN nor in a PLMN that is equivalent to their HPLMN, see TS 22.011 [10].
ab-Common The AB parameters applicable for all PLMN(s).
ab-PerPLMN-List The AB parameters per PLMN, listed in the same order as the PLMN(s) occur in *plmn-IdentityList* in *SystemInformationBlockType1-NB*.

– *SystemInformationBlockType16-NB*

The IE *SystemInformationBlockType16-NB* contains information related to GPS time and Coordinated Universal Time (UTC). The UE may use the parameters provided in this system information block to obtain the UTC, the GPS and the local time.

```
-- ASN1START

SystemInformationBlockType16-NB-r13 ::= SystemInformationBlockType16-r11

-- ASN1STOP
```

6.7.3.2 NB-IoT Radio resource control information elements

– *CarrierConfigDedicated-NB*

The IE *CarrierConfigDedicated-NB* is used to specify a non-anchor carrier in NB-IoT.

***CarrierConfigDedicated-NB* information elements**

```
-- ASN1START

CarrierConfigDedicated-NB-r13 ::=       SEQUENCE {
    dl-CarrierConfig-r13        DL-CarrierConfigDedicated-NB-r13,
    ul-CarrierConfig-r13        UL-CarrierConfigDedicated-NB-r13
}

DL-CarrierConfigDedicated-NB-r13 ::=    SEQUENCE {
    dl-CarrierFreq-r13                      CarrierFreq-NB-r13,
    downlinkBitmapNonAnchor-r13             CHOICE {
        useNoBitmap-r13                         NULL,
        useAnchorBitmap-r13                     NULL,
        explicitBitmapConfiguration-r13         DL-Bitmap-NB-r13,
        spare                                   NULL
    }       OPTIONAL,    -- Need ON
    dl-GapNonAnchor-r13                     CHOICE {
        useNoGap-r13                            NULL,
        useAnchorGapConfig-r13                  NULL,
        explicitGapConfiguration-r13            DL-GapConfig-NB-r13,
```


DAINGEAN_0002315

```
        spare                                   NULL
    }       OPTIONAL,    -- Need ON
    inbandCarrierInfo-r13           SEQUENCE {
        samePCI-Indicator-r13           CHOICE  {
            samePCI-r13                     SEQUENCE {
                indexToMidPRB-r13               INTEGER (-55..54)
            },
            differentPCI-r13                SEQUENCE {
                eutra-NumCRS-Ports-r13          ENUMERATED {same, four}
            }
        }                           OPTIONAL,       -- Cond anchor-guardband
        eutraControlRegionSize-r13          ENUMERATED {n1, n2, n3}
    }                               OPTIONAL,       -- Cond non-anchor-inband
    ...
}

UL-CarrierConfigDedicated-NB-r13 ::=    SEQUENCE {
    ul-CarrierFreq-r13          CarrierFreq-NB-r13      OPTIONAL,   -- Need OP
    ...
}

-- ASN1STOP
```

***CarrierConfigDedicated-NB* field descriptions**
dl-CarrierConfig Donwlink Carrier different form the anchor carrier used for all unicast transmissions . If absent, the downlink carrier is the downlink anchor carrier.
dl-CarrierFreq DL carrier frequency. The downlink carrier is not in a E-UTRA PRB which contains E-UTRA PSS/SSS/PBCH.
dl-GapNonAnchor Downlink transmission gap configuration for the non-anchor carrier, see TS 36.211 [21] and TS 36.213 [23].
downlinkBitmapNonAnchor Nb-IoT downlink subframe configuration for downlink transmission on the non-anchor carrier.
eutraControlRegionSize Indicates the control region size of the E-UTRA cell for the in-band operation mode. Unit is in number of OFDM symbols. If *operationModeInfo* in MIB-NB is set to *inband-SamePCI* or *inband-DifferentPCI*, it should be set to the value broadcast in SIB1-NB.
eutra-NumCRS-Ports Number of E-UTRA CRS antenna ports, either the same number of ports as NRS or 4 antenna ports. See TS 36.211 [21], TS 36.212 [22], and TS 36.213 [23].
inbandCarrierInfo Provides the configuration of a non-anchor inband carrier. If absent, the configuration of the anchor carrier applies.
indexToMidPRB The PRB index is signaled by offset from the middle of the EUTRA system.
samePCI-Indicator This parameter specifies whether the non-anchor carrier reuses the same PCI as the EUTRA carrier.
ul-CarrierConfig If absent, the uplink carrier is the uplink anchor carrier.
ul-CarrierFreq UL carrier frequency if absent, the same TX-RX frequency separation as for the anchor carrier applies.

Conditional presence	Explanation
non-anchor-inband	The field is optionally present, need OP, if the non-anchor carrier is an inband carrier; otherwise it is not present.
anchor-guardband	The field is mandatory present, if *operationModeInfo* is set to *guardband* in the MIB; otherwise it is not present.

– *CarrierFreq-NB*

The IE *CarrierFreq-NB* is used to provide the NB-IoT carrier frequency, as defined in TS 36.101 [42]

***CarrierFreq-NB* information elements**

```
-- ASN1START

CarrierFreq-NB-r13 ::=      SEQUENCE {
```


DAINGEAN_0002316

```
    carrierFreq-r13             ARFCN-ValueEUTRA-r9,
    carrierFreqOffset-r13       ENUMERATED {
                                    v-10, v-9, v-8, v-7, v-6, v-5, v-4, v-3, v-2, v-1, v-0dot5,
                                      v0,  v1,  v2,  v3,  v4,  v5,  v6,  v7,  v8,  v9
                                    }   OPTIONAL    -- Need ON
}

-- ASN1STOP
```

***CarrierFreq-NB* field descriptions**
carrierFreq
provides the ARFCN applicable for the NB-IoT carrier frequency as defined in TS 36.101 [42, Table 5.7.3-1].
carrierFreqOffset
Offset of the NB-IoT channel number to EARFCN as defined in TS 36.101 [42]. Value v-10 means -10, v-9 means -9, and so on.

– *DL-Bitmap-NB*

The IE *DL-Bitmap-NB* is used to specify the set of NB-IoT downlink subframes for downlink transmission.

DL-Bitmap-NB information element

```
-- ASN1START

DL-Bitmap-NB-r13 ::=            CHOICE {
    subframePattern10-r13           BIT STRING (SIZE (10)),
    subframePattern40-r13           BIT STRING (SIZE (40))
}

-- ASN1STOP
```

***DL-Bitmap-NB* field descriptions**
subframePattern10, subframePattern40
NB-IoT downlink subframe configuration over 10ms or 40ms for inband and 10ms for standalone/guardband. The first/leftmost bit corresponds to the subframe #0 of the radio frame satisfying SFN mod x = 0, where x is the size of the bit string divided by 10. Value 0 in the bitmap indicates that the corresponding subframe is invalid for downlink transmission. Value 1 in the bitmap indicates that the corresponding subframe is valid for downlink transmission.

– *DL-GapConfig-NB*

The IE *DL-GapConfig-NB* is used to specify the downlink gap configuration for NPDCCH and NPDSCH. Downlink gaps only apply in RRC_CONNECTED mode.

DL-GapConfig-NB information element

```
-- ASN1START


DL-GapConfig-NB-r13 ::=     SEQUENCE {
    dl-GapThreshold-r13         ENUMERATED {n32, n64, n128, n256},
    dl-GapPeriodicity-r13       ENUMERATED {sf64, sf128, sf256, sf512},
    dl-GapDurationCoeff-r13     ENUMERATED {oneEighth, oneFourth, threeEighth, oneHalf}
}

-- ASN1STOP
```


DAINGEAN_0002317

DL-GapConfig-NB field descriptions
dl-GapDurationCoeff Coefficient to calculate the gap duration of a DL transmission: dl-GapDurationCoeff * dl-GapPeriodicity, Duration in number of subframes. See TS 36.211 [21] and TS 36.213 [23].
dl-GapPeriodicity Periodicity of a DL transmission gap in number of subframes. See TS 36.211 [21] and TS 36.213 [23].
dl-GapThreshold Threshold on the maximum number of repetitions configured for NPDCCH before application of DL transmission gap configuration, See TS 36.211 [21] and TS 36.213 [23].

– *LogicalChannelConfig-NB*

The IE *LogicalChannelConfig-NB* is used to configure the logical channel parameters.

LogicalChannelConfig-NB information element

```
-- ASN1START

LogicalChannelConfig-NB-r13 ::=     SEQUENCE {
    priority-r13                        INTEGER (1..16)         OPTIONAL,       -- Cond UL
    logicalChannelSR-Prohibit-r13       BOOLEAN                 OPTIONAL,       -- Need ON
    ...
}

-- ASN1STOP
```

LogicalChannelConfig-NB field descriptions
logicalChannelSR-Prohibit Value *TRUE* indicates that the *logicalChannelSR-ProhibitTimer* is enabled for the logical channel. E-UTRAN only (optionally) configures the field (i.e. indicates value *TRUE*) if *logicalChannelSR-ProhibitTimer* is configured. See TS 36.321 [6].
priority Logical channel priority in TS 36.321 [6]. Value is an integer.

Conditional presence	Explanation
UL	The field is mandatory present for UL logical channels; otherwise it is not present.

– *MAC-MainConfig-NB*

The IE *MAC-MainConfig-NB* is used to specify the MAC main configuration for signalling and data radio bearers.

MAC-MainConfig-NB information element

```
-- ASN1START

MAC-MainConfig-NB-r13 ::=       SEQUENCE {
    ul-SCH-Config-r13               SEQUENCE {
        periodicBSR-Timer-r13           PeriodicBSR-Timer-NB-r13        OPTIONAL,   -- Need ON
        retxBSR-Timer-r13               RetxBSR-Timer-NB-r13
    }                                                                   OPTIONAL,   -- Need ON
    drx-Config-r13                      DRX-Config-NB-r13               OPTIONAL,   -- Need ON
    timeAlignmentTimerDedicated-r13     TimeAlignmentTimer,
    logicalChannelSR-Config-r13         CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            logicalChannelSR-ProhibitTimer-r13  ENUMERATED {
                                                    pp2, pp8, pp32, pp128, pp512,
                                                    pp1024, pp2048, spare1}
        }
    }                                                                   OPTIONAL,   -- Need ON
    ...
}

PeriodicBSR-Timer-NB-r13 ::=        ENUMERATED {
```


DAINGEAN_0002318

```
                                        pp2, pp4, pp8, pp16, pp64, pp128, infinity, spare}

RetxBSR-Timer-NB-r13 ::=            ENUMERATED {
                                        pp4, pp16, pp64, pp128, pp256, pp512, infinity, spare}

DRX-Config-NB-r13 ::=               CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        onDurationTimer-r13                 ENUMERATED {
                                                pp1, pp2, pp3, pp4, pp8, pp16, pp32, spare},
        drx-InactivityTimer-r13             ENUMERATED {
                                                pp0, pp1, pp2, pp3, pp4, pp8, pp16, pp32},
        drx-RetransmissionTimer-r13         ENUMERATED {
                                                pp0, pp1, pp2, pp4, pp6, pp8, pp16, pp24,
                                                pp33, spare7, spare6, spare5,
                                                spare4, spare3, spare2, spare1},
        drx-Cycle-r13                       ENUMERATED {
                                                sf256, sf512, sf1024, sf1536, sf2048, sf3072,
                                                sf4096, sf4608, sf6144, sf7680, sf8192, sf9216,
                                                spare4, spare3, spare2, spare1},
        drx-StartOffset-r13                 INTEGER (0..255),
        drx-ULRetransmissionTimer-r13       ENUMERATED {
                                                pp0, pp1, pp2, pp4, pp6, pp8, pp16, pp24,
                                                pp33, pp40, pp64, pp80, pp96,
                                                pp112, pp128, pp160, pp320}
    }
}


-- ASN1STOP
```

***MAC-MainConfig-NB* field descriptions**
drx-Config Used to configure DRX as specified in TS 36.321 [6].
drx-Cycle *longDRX-Cycle* in TS 36.321 [6]. The value of l*ongDRX-Cycle* is in number of sub-frames. Value sf256 corresponds to 256 sub-frames, sf512 corresponds to 512 sub-frames and so on.
drx-StartOffset *drxStartOffset* in TS 36.321 [6]. Value is in number of sub-frames by step of (drx-cycle / 256).
drx-InactivityTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH periods. Value pp0 corresponds to no inactivity timer, pp1 corresponds to 1 PDCCH period, pp2 corresponds to 2 PDCCH periods and so on.
drx-RetransmissionTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH periods.Value pp0 corresponds to no retransmission timer, pp1 corresponds to 1 PDCCH period, pp2 corresponds to 2 PDCCH periods and so on.
drx-ULRetransmissionTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH periods.Value pp0 corresponds to no retransmission timer, value pp1 corresponds to 1 PDCCH period, pp2 corresponds to 2 PDCCH periods and so on.
logicalChannelSR-ProhibitTimer Timer used to delay the transmission of an SR. See TS 36.321 [6]. Value in number of PDCCH periods. Value pp2 corresponds to 2 PDCCH periods, pp8 corresponds to 8 PDCCH periods and so on.
periodicBSR-Timer Timer for BSR reporting in TS 36.321 [6]. Value in number of PDCCH periods. Value pp2 corresponds to 2 PDCCH periods, pp4 corresponds to 4 PDCCH periods and so on.
retxBSR-Timer Timer for BSR reporting in TS 36.321 [6]. Value in number of PDCCH periods. Value pp4 corresponds to 4 PDCCH periods, pp16 corresponds to 16 PDCCH periods and so on.
onDurationTimer Timer for DRX in TS 36.321 [6]. Value in number of PDCCH periods. Value pp1 corresponds to 1 PDCCH period, pp2 corresponds to 2 PDCCH periods and so on.
timeAlignmentTimer Indicates the value of the time alignment timer, see TS 36.321 [6].

– *NPDCCH-ConfigDedicated-NB*

The IE *NPDCCH-ConfigDedicated-NB* specifies the subframes and resource blocks for NPDCCH monitoring.

DAINGEAN_0002319

NPDCCH-ConfigDedicated-NB information element

```
-- ASN1START

NPDCCH-ConfigDedicated-NB-r13 ::=   SEQUENCE {
    npdcch-NumRepetitions-r13           ENUMERATED {r1, r2, r4, r8, r16, r32, r64, r128,
                                                    r256, r512, r1024, r2048,
                                                    spare4, spare3, spare2, spare1},
    npdcch-StartSF-USS-r13              ENUMERATED {v1dot5, v2, v4, v8, v16, v32, v48, v64},
    npdcch-Offset-USS-r13               ENUMERATED {zero, oneEighth, oneFourth, threeEighth}
}

-- ASN1STOP
```

NPDCCH-ConfigDedicated-NB field descriptions
npdcch-NumRepetitions
Maximum number of repetitions for NPDCCH UE specific search space (USS), see TS 36.213 [23]. UE monitors one set of values (consisting of aggregation level, number of repetitions and number of blind decodes) according to the configured maximum number of repetitions.
npdcch-Offset-USS
Fractional period offset of starting subframe for NPDCCH UE specific search space USS.
npdcch-StartSF-USS
Starting subframe configuration for an NPDCCH UE-specific search space, see TS 36.213 [23]. Value v1dot5 corresponds to 1.5, value 2 corresponds to 2 and so on.

– NPDSCH-ConfigCommon-NB

The IE *NPDSCH-ConfigCommon-NB* is used to specify the common NPDSCH configuration.

NPDSCH-ConfigCommon-NB information element

```
-- ASN1START


NPDSCH-ConfigCommon-NB-r13 ::=  SEQUENCE {
    nrs-Power-r13                   INTEGER (-60..50)
}

-- ASN1STOP
```

NPDSCH-ConfigCommon-NB field descriptions
nrs-Power
Provides the downlink narrowband reference-signal EPRE, see TS 36.213 [23, 5.2]. The actual value in dBm.

– NPRACH-ConfigSIB-NB

The IE *NPRACH-ConfigSIB-NB* is used to specify the NPRACH configuration in the system information.

NPRACH-ConfigSIB-NB information elements

```
-- ASN1START

NPRACH-ConfigSIB-NB-r13 ::=         SEQUENCE {
    nprach-CP-Length-r13                ENUMERATED {us66dot7, us266dot7},
    rsrp-ThresholdsPrachInfoList-r13    RSRP-ThresholdsNPRACH-InfoList-NB-r13   OPTIONAL,   -- need
OR
    nprach-ParametersList-r13           NPRACH-ParametersList-NB-r13
}

NPRACH-ParametersList-NB-r13 ::=    SEQUENCE (SIZE (1.. maxNPRACH-Resources-NB-r13)) OF NPRACH-
Parameters-NB-r13

NPRACH-Parameters-NB-r13::=         SEQUENCE {
    nprach-Periodicity-r13                  ENUMERATED {ms40, ms80, ms160, ms240,
                                                        ms320, ms640, ms1280, ms2560},
    nprach-StartTime-r13                    ENUMERATED {ms8, ms16, ms32, ms64,
                                                        ms128, ms256, ms512, ms1024},
```


DAINGEAN_0002320

```
    nprach-SubcarrierOffset-r13             ENUMERATED {n0, n12, n24, n36, n2, n18, n34, spare1},
    nprach-NumSubcarriers-r13               ENUMERATED {n12, n24, n36, n48},
    nprach-SubcarrierMSG3-RangeStart-r13    ENUMERATED {zero, oneThird, twoThird, one},
    maxNumPreambleAttemptCE-r13             ENUMERATED {n3, n4, n5, n6, n7, n8, n10, spare1},
    numRepetitionsPerPreambleAttempt-r13    ENUMERATED {n1, n2, n4, n8, n16, n32, n64, n128},
    npdcch-NumRepetitions-RA-r13            ENUMERATED {r1, r2, r4, r8, r16, r32, r64, r128,
                                                        r256, r512, r1024, r2048,
                                                        spare4, spare3, spare2, spare1},
    npdcch-StartSF-CSS-RA-r13               ENUMERATED {v1dot5, v2, v4, v8, v16, v32, v48, v64},
    npdcch-Offset-RA-r13                    ENUMERATED {zero, oneEighth, oneFourth, threeEighth}
}

RSRP-ThresholdsNPRACH-InfoList-NB-r13 ::= SEQUENCE (SIZE(1..2)) OF RSRP-Range

-- ASN1STOP
```

***NPRACH-ConfigSIB-NB* field descriptions**
maxNumPreambleAttemptCE Maximum number of preamble transmission attempts per NPRACH resource. See TS 36.321 [6].
npdcch-NumRepetitions-RA Maximum number of repetitions for NPDCCH common search space (CSS) for RAR, Msg3 retransmission and Msg4, see TS 36.211 [21].
npdcch-Offset -RA Fractional period offset of starting subframe for NPDCCH common search space (CSS Type 2, see TS 36.211 [21] and TS 36.213 [23].
npdcch-StartSF-CSS-RA Starting subframe configuration for NPDCCH common search space (CSS), including RAR, Msg3 retransmission, and Msg4, see TS 36.211 [21] and TS 36.213 [23].
nprach-CP-Length Cyclic prefix length for NPRACH transmission, see TS 36.211 [21, 5.2.1]. Value us66dot7 corresponds to 66.7 microseconds and value us266dot7 corresponds to 266.7 microseconds.
nprach-NumSubcarriers Number of sub-carriers in a NPRACH resource. In number of subcarriers.
nprach-ParametersList Configures NPRACH parameters for each NPRACH resource. Up to three PRACH resources can be configured in a cell. Each NPRACH resource is associated with a different number of NPRACH repetitions.
nprach-Periodicity Periodicity of a NPRACH resource. Unit in millisecond.
nprach-StartTime Start time of the NPRACH resource in one period. Unit in millisecond.
nprach-SubcarrierOffset Frequency location of the NPRACH resource. In number of subcarriers, offset from sub-carrier 0.
nprach-SubcarrierMSG3-RangeStart Fraction for calculating the starting subcarrier index of the range reserved for indication of UE support for multi-tone Msg3 transmission, within the NPRACH resource.. Multi-tone Msg3 transmission is not supported for {32, 64, 128} repetitions of NPRACH. For at least one of the NPRACH resources with the number of NPRACH repetitions other than {32, 64, 128}, the value of *nprach-SubcarrierMSG3-RangeStart* should be less than 1.
numRepetitionPerPreambleAttempt Number of NPRACH repetitions per attempt for each NPRACH resource, See TS 36.211 [21].
rsrp-ThresholdsPrachInfoList The criterion for UEs to select a NPRACH resource. Up to 2 RSRP threshold values can be signalled. See TS 36.213 [23]. The first element corresponds to RSRP threshold 1, the second element corresponds to RSRP threshold 2. See TS 36.321 [6]. If absent, there is only one NPRACH resource.

– *NPUSCH-Config-NB*

The IE *NPUSCH-ConfigCommon-NB* is used to specify the common NPUSCH configuration. The IE *NPUSCH-ConfigDedicated-NB* is used to specify the UE specific NPUSCH configuration.

***NPUSCH-Config-NB* information element**

```
-- ASN1START

NPUSCH-ConfigCommon-NB-r13 ::=      SEQUENCE {
    ack-NACK-NumRepetitions-Msg4-r13    SEQUENCE (SIZE(1.. maxNPRACH-Resources-NB-r13)) OF
                                            ACK-NACK-NumRepetitions-NB-r13,
    srs-SubframeConfig-r13              ENUMERATED {
```


DAINGEAN_0002321

```
                                        sc0, sc1, sc2, sc3, sc4, sc5, sc6, sc7,
                                        sc8, sc9, sc10, sc11, sc12, sc13, sc14, sc15
                                        }                                   OPTIONAL,   -- Need OR
    dmrs-Config-r13                 SEQUENCE {
        threeTone-BaseSequence-r13      INTEGER (0..12)                     OPTIONAL,   -- Need OP
        threeTone-CyclicShift-r13       INTEGER (0..2),
        sixTone-BaseSequence-r13        INTEGER (0..14)                     OPTIONAL,   -- Need OP
        sixTone-CyclicShift-r13         INTEGER (0..3),
        twelveTone-BaseSequence-r13     INTEGER (0..30)                     OPTIONAL    -- Need OP
    }       OPTIONAL,   -- Need OR
    ul-ReferenceSignalsNPUSCH-r13   UL-ReferenceSignalsNPUSCH-NB-r13
}

UL-ReferenceSignalsNPUSCH-NB-r13 ::=    SEQUENCE {
    groupHoppingEnabled-r13             BOOLEAN,
    groupAssignmentNPUSCH-r13           INTEGER (0..29)
}

NPUSCH-ConfigDedicated-NB-r13 ::=   SEQUENCE {
    ack-NACK-NumRepetitions-r13         ACK-NACK-NumRepetitions-NB-r13  OPTIONAL,   -- Need ON
    npusch-AllSymbols-r13               BOOLEAN                         OPTIONAL,   -- Cond SRS
    groupHoppingDisabled-r13            ENUMERATED {true}               OPTIONAL    -- Need OR
}

ACK-NACK-NumRepetitions-NB-r13  ::= ENUMERATED {r1, r2, r4, r8, r16, r32, r64, r128}


-- ASN1STOP
```

***NPUSCH-Config-NB* field descriptions**
ack-NACK-NumRepetitions Number of repetitions for the ACK NACK resource unit carrying HARQ response to NPDSCH see TS 36.211 [21] and TS 36.213 [23]. If absent, the value of *ack-NACK-NumRepetitions-Msg4* signalled in SIB2 is used.
ack-NACK-NumRepetitions-Msg4 Number of repetitions for ACK/NACK HARQ response to NPDSCH containing Msg4 per NPRACH resource, see TS 36.211 [21] and TS 36.213 [23].
groupAssignmentNPUSCH Parameter: ΔSS See TS 36.211 [21, 5.5.1.3].
groupHoppingDisabled Parameter: Disable-sequence-group-hopping, see TS 36.211 [21, 5.5.1.3].
groupHoppingEnabled Parameter: Group-hopping-enabled, see TS 36.211 [21, 5.5.1.3].
npusch-AllSymbols If set to TRUE, the UE shall use all NB-IoT symbols for NPUSCH transmission. If set to FALSE, the UE punctures the NPUSCH transmissions in the symbols that collides with SRS. If the field is not present, the UE uses all NB-IoT symbols for NPUSCH transmission.
sixTone-BaseSequence The base sequence of DMRS sequence in a cell for 6 tones transmission; see TS 36.211 [21]. If absent, it is given by NB-IoT CellID mod 14.
sixTone-CyclicShift Define 4 cyclic shifts for the 6-tone case, see TS 36.211 [21].
srs-SubframeConfig SRS SubframeConfiguration. See TS 36.211 [21, table 5.5.3.3-1]. Value sc0 corresponds to value 0, sc1 to value 1 and so on.
threeTone-BaseSequence The base sequence of DMRS sequence in a cell for 3 tones transmission; see TS 36.211 [21]. If absent, it is given by NB-IoT CellID mod 12.
threeTone-CyclicShift Define 3 cyclic shifts for the 3-tone case, see TS 36.211 [21].
twelveTone-BaseSequence The base sequence of DMRS sequence in a cell for 12 tones transmission; see TS 36.211 [21]. If absent, it is given by NB-IoT CellID mod 30.
ul-ReferenceSignalsNPUSCH Used to specify parameters needed for the transmission on NPUSCH.

Conditional presence	Explanation
SRS	This field is optionally present, need OP, if srs-SubframeConfig is broadcasted. Otherwise, the IE is not present.

DAINGEAN_0002322

– *PDCP-Config-NB*

The IE *PDCP-Config-NB* is used to set the configurable PDCP parameters for data radio bearers.

PDCP-Config-NB information element

```
-- ASN1START

PDCP-Config-NB-r13 ::=      SEQUENCE {
    discardTimer-r13            ENUMERATED {
                                    ms5120, ms10240, ms20480, ms40960,
                                    ms81920, infinity, spare2, spare1
                                    }   OPTIONAL,           -- Cond Setup
    headerCompression-r13       CHOICE {
        notUsed                     NULL,
        rohc                        SEQUENCE {
            maxCID-r13                  INTEGER (1..16383)          DEFAULT 15,
            profiles-r13                SEQUENCE {
                profile0x0002               BOOLEAN,
                profile0x0003               BOOLEAN,
                profile0x0004               BOOLEAN,
                profile0x0006               BOOLEAN,
                profile0x0102               BOOLEAN,
                profile0x0103               BOOLEAN,
                profile0x0104               BOOLEAN
            },
            ...
        }
    },
    ...
}

-- ASN1STOP
```

***PDCP-Config-NB* field descriptions**
discardTimer   Indicates the discard timer value specified in TS 36.323 [8]. Value in milliseconds. Value ms5120 means 5120 ms, ms10240 means 10240 ms and so on.
headerCompression   E-UTRAN does not reconfigure header compression except optionally upon RRC Connection Resumption.
maxCID   Indicates the value of the MAX_CID parameter as specified in TS 36.323 [8]. The total value of MAX_CIDs across all bearers for the UE should be less than or equal to the value of *maxNumberROHC-ContextSessions* parameter as indicated by the UE.
profiles   The profiles used by both compressor and decompressor in both UE and E-UTRAN. The field indicates which of the ROHC profiles specified in TS 36.323 [8] are supported, i.e. value *true* indicates that the profile is supported. Profile 0x0000 shall always be supported when the use of ROHC is configured. If support of two ROHC profile identifiers with the same 8 LSB's is signalled, only the profile corresponding to the highest value shall be applied.

Conditional presence	Explanation
Setup	The field is mandatory present in case of radio bearer setup. Otherwise the field is optionally present, need ON.

– *PhysicalConfigDedicated-NB*

The IE *PhysicalConfigDedicated-NB* is used to specify the UE specific physical channel configuration.

PhysicalConfigDedicated-NB information element

```
-- ASN1START

PhysicalConfigDedicated-NB-r13 ::=  SEQUENCE {
    carrierConfigDedicated-r13          CarrierConfigDedicated-NB-r13       OPTIONAL,   -- Need ON
    npdcch-ConfigDedicated-r13          NPDCCH-ConfigDedicated-NB-r13       OPTIONAL,   -- Need ON
    npusch-ConfigDedicated-r13          NPUSCH-ConfigDedicated-NB-r13       OPTIONAL,   -- Need ON
    uplinkPowerControlDedicated-r13     UplinkPowerControlDedicated-NB-r13  OPTIONAL,   -- Need ON
```


DAINGEAN_0002323

```
    ...
}

-- ASN1STOP
```

PhysicalConfigDedicated-NB field descriptions
carrierConfigDedicated Carrier different from the anchor carrier (on which the UE has received NPSS/SSS, NPBCH and SIB transmissions) to be used for all unicast transmissions.
npdcch-ConfigDedicated NPDCCH configuration.
npusch-ConfigDedicated UL unicast configuration.
ul-PowerControlDedicated UL power control parameter

– *RACH-ConfigCommon-NB*

The IE *RACH-ConfigCommon-NB* is used to specify the generic random access parameters.

RACH-ConfigCommon-NB information element

```
-- ASN1START

RACH-ConfigCommon-NB-r13 ::=          SEQUENCE {
    preambleTransMax-CE-r13               PreambleTransMax,
    powerRampingParameters-r13            PowerRampingParameters,
    rach-InfoList-r13                     RACH-InfoList-NB-r13,
    connEstFailOffset-r13                 INTEGER (0..15)                 OPTIONAL,   -- Need OP
    ...
}

RACH-InfoList-NB-r13 ::=    SEQUENCE (SIZE (1.. maxNPRACH-Resources-NB-r13)) OF RACH-Info-NB-r13

RACH-Info-NB-r13    ::=     SEQUENCE {
    ra-ResponseWindowSize-r13             ENUMERATED {
                                              pp2, pp3, pp4, pp5, pp6, pp7, pp8, pp10},
    mac-ContentionResolutionTimer-r13     ENUMERATED {
                                              pp1, pp2, pp3, pp4, pp8, pp16, pp32, pp64}
}

-- ASN1STOP
```

RACH-ConfigCommon-NB field descriptions
connEstFailOffset Parameter "Qoffset$_{temp}$" in TS 36.304 [4]. If the field is not present the value of infinity shall be used for "Qoffset$_{temp}$".
mac-ContentionResolutionTimer Timer for contention resolution in TS 36.321 [6]. Value in PDCCH periods. Value pp1 corresponds to 1 PDCCH period, pp2 corresponds to 2 PDCCH periods and so on. The value considered by the UE is: mac-ContentionResolutionTimer = Min (signaled value x PDCCH period, 10.24s).
powerRampingParameters Power ramping step and preamble initial received target power – same as TS 36.213 [23] and TS 36.321 [6]. If more than one repetition level is configured in the cell, then the UE transmits NPRACH with max power except for the lowest repetition level. Otherwise, the UE uses NPRACH power ramping.
preambleTransMax-CE Maximum number of preamble transmission in TS 36.321 [6]. Value is an integer.
ra-ResponseWindowSize Duration of the RA response window in TS 36.321 [6]. Value in PDCCH periods. Value pp2 corresponds to 2 PDDCH periods, pp3 corresponds to 3 PDCCH periods and so on. The value considered by the UE is: ra-ResponseWindowSize = Min (signaled value x PDCCH period, 10.24s).

DAINGEAN_0002324

– *RadioResourceConfigCommonSIB-NB*

The IE *RadioResourceConfigCommonSIB-NB* is used to specify common radio resource configurations in the system information, e.g., the random access parameters and the static physical layer parameters.

RadioResourceConfigCommonSIB-NB information element

```
-- ASN1START

RadioResourceConfigCommonSIB-NB-r13 ::= SEQUENCE {
    rach-ConfigCommon-r13                   RACH-ConfigCommon-NB-r13,
    bcch-Config-r13                         BCCH-Config-NB-r13,
    pcch-Config-r13                         PCCH-Config-NB-r13,
    nprach-Config-r13                       NPRACH-ConfigSIB-NB-r13,
    npdsch-ConfigCommon-r13                 NPDSCH-ConfigCommon-NB-r13,
    npusch-ConfigCommon-r13                 NPUSCH-ConfigCommon-NB-r13,
    dl-Gap-r13                              DL-GapConfig-NB-r13         OPTIONAL,       -- Need OP
    uplinkPowerControlCommon-r13            UplinkPowerControlCommon-NB-r13,
    ...
}

BCCH-Config-NB-r13 ::=                  SEQUENCE {
    modificationPeriodCoeff-r13             ENUMERATED {n16, n32, n64, n128}
}


PCCH-Config-NB-r13 ::=                  SEQUENCE {
    defaultPagingCycle-r13                  ENUMERATED {rf128, rf256, rf512, rf1024},
    nB-r13                                  ENUMERATED {
                                                fourT, twoT, oneT, halfT, quarterT, one8thT,
                                                one16thT, one32ndT, one64thT,
                                                one128thT, one256thT, one512thT, one1024thT,
                                                spare3, spare2, spare1},
    npdcch-NumRepetitionPaging-r13          ENUMERATED {
                                                r1, r2, r4, r8, r16, r32, r64, r128,
                                                r256, r512, r1024, r2048,
                                                spare4, spare3, spare2, spare1}
}

-- ASN1STOP
```

***RadioResourceConfigCommonSIB-NB* field descriptions**
defaultPagingCycle
Default paging cycle, used to derive 'T' in TS 36.304 [4]. Value rf128 corresponds to 128 radio frames, rf256 corresponds to 256 radio frames and so on.
dl-Gap
Downlink transmission gap configuration for the carrier with NPSS/NSSS/NBCH/SIB1-NB. See TS 36.211 [21] and TS 36.213 [23] If the field is absent , there is no gap.
modificationPeriodCoeff
Actual modification period, expressed in number of radio frames= *modificationPeriodCoeff* * *defaultPagingCycle*. n16 corresponds to value 16, n32 corresponds to value 32, and so on. The BCCH modification period should be larger or equal to 40.96s.
nB
Parameter: nB is used as one of parameters to derive the Paging Frame and Paging Occasion according to TS 36.304 [4]. Value in multiples of 'T' as defined in TS 36.304 [4]. A value of fourT corresponds to 4 * T, a value of twoT corresponds to 2 * T and so on.
npdcch-NumRepetitionPaging
Maximum number of repetitions for NPDCCH common search space (CSS) for paging, see TS 36.211 [21].

– *RadioResourceConfigDedicated-NB*

The IE *RadioResourceConfigDedicated-NB* is used to setup/modify/release RBs, to modify the MAC main configuration, and to modify dedicated physical configuration.

RadioResourceConfigDedicated-NB information element

```
-- ASN1START

RadioResourceConfigDedicated-NB-r13 ::= SEQUENCE {
```


DAINGEAN_0002325

```
    srb-ToAddModList-r13                SRB-ToAddModList-NB-r13         OPTIONAL,   -- Need ON
    drb-ToAddModList-r13                DRB-ToAddModList-NB-r13         OPTIONAL,   -- Need ON
    drb-ToReleaseList-r13               DRB-ToReleaseList-NB-r13        OPTIONAL,   -- Need ON
    mac-MainConfig-r13                  CHOICE {
        explicitValue-r13                   MAC-MainConfig-NB-r13,
        defaultValue-r13                    NULL
    }                                                                   OPTIONAL,   -- Need ON
    physicalConfigDedicated-r13         PhysicalConfigDedicated-NB-r13  OPTIONAL,   -- Need ON
    rlf-TimersAndConstants-r13          RLF-TimersAndConstants-NB-r13   OPTIONAL,   -- Need ON
    ...
}

SRB-ToAddModList-NB-r13 ::=         SEQUENCE (SIZE (1)) OF SRB-ToAddMod-NB-r13

SRB-ToAddMod-NB-r13 ::=             SEQUENCE {
    rlc-Config-r13                      CHOICE {
        explicitValue                       RLC-Config-NB-r13,
        defaultValue                        NULL
    }       OPTIONAL,                                                   -- Cond Setup
    logicalChannelConfig-r13            CHOICE {
        explicitValue                       LogicalChannelConfig-NB-r13,
        defaultValue                        NULL
    }       OPTIONAL,                                                   -- Cond Setup
    ...
}

DRB-ToAddModList-NB-r13 ::=         SEQUENCE (SIZE (1..maxDRB-NB-r13)) OF DRB-ToAddMod-NB-r13

DRB-ToAddMod-NB-r13 ::=             SEQUENCE {
    eps-BearerIdentity-r13              INTEGER (0..15)             OPTIONAL,   -- Cond DRB-Setup
    drb-Identity-r13                    DRB-Identity,
    pdcp-Config-r13                     PDCP-Config-NB-r13          OPTIONAL,   -- Cond Setup
    rlc-Config-r13                      RLC-Config-NB-r13           OPTIONAL,   -- Cond Setup
    logicalChannelIdentity-r13          INTEGER (3..10)             OPTIONAL,   -- Cond DRB-Setup
    logicalChannelConfig-r13            LogicalChannelConfig-NB-r13 OPTIONAL,   -- Cond Setup
    ...
}

DRB-ToReleaseList-NB-r13 ::=        SEQUENCE (SIZE (1..maxDRB-NB-r13)) OF DRB-Identity

-- ASN1STOP
```

***RadioResourceConfigDedicated-NB* field descriptions**
logicalChannelConfig For SRB a choice is used to indicate whether the logical channel configuration is signalled explicitly or set to the default logical channel configuration for SRB1 as specified in 9.2.1.1.
logicalChannelIdentity The logical channel identity for both UL and DL for SRB1.
mac-MainConfig The default MAC MAIN configuration is specified in 9.2.2.
physicalConfigDedicated The default dedicated physical configuration is specified in 9.2.4.
rlc-Config For SRBs a choice is used to indicate whether the RLC configuration is signalled explicitly or set to the values defined in the default RLC configuration for SRB1 in 9.2.1.1. RLC AM is the only applicable RLC mode.

Conditional presence	Explanation
DRB-Setup	The field is mandatory present if the corresponding DRB is being set up; otherwise it is not present.
Setup	The field is mandatory present if the corresponding SRB/DRB is being setup; otherwise the field is optionally present, need ON.

– *RLC-Config-NB*

The IE *RLC-Config-NB* is used to specify the RLC configuration of SRBs and DRBs.

DAINGEAN_0002326

RLC-Config-NB information element

```
-- ASN1START

RLC-Config-NB-r13 ::=   CHOICE  {
    am                          SEQUENCE {
        ul-AM-RLC-r13                   UL-AM-RLC-NB-r13,
        dl-AM-RLC-r13                   DL-AM-RLC-NB-r13
    },
    ...
}


UL-AM-RLC-NB-r13 ::=        SEQUENCE {
    t-PollRetransmit-r13        T-PollRetransmit-NB-r13,
    maxRetxThreshold-r13        ENUMERATED {t1, t2, t3, t4, t6, t8, t16, t32}
}

DL-AM-RLC-NB-r13 ::=        SEQUENCE {
    enableStatusReportSN-Gap-r13    ENUMERATED {true}   OPTIONAL
}

T-PollRetransmit-NB-r13 ::= ENUMERATED {
                                ms250,  ms500,  ms1000, ms2000, ms3000, ms4000,
                                ms6000, ms10000, ms15000, ms25000, ms40000, ms60000,
                                ms90000, ms120000, ms180000, spare1}


-- ASN1STOP
```

***RLC-Config-NB* field descriptions**
enableStatusReportSN-Gap Indicates that status reporting due to detection of reception failure is enabled, as specified in TS 36.322 [7].
maxRetxThreshold Parameter for RLC AM in TS 36.322 [7]. Value t1 corresponds to 1 retransmission, t2 to 2 retransmissions and so on.
t-PollRetransmit Timer for RLC AM in TS 36.322 [7], in milliseconds. Value msX means X ms, msY means Y ms and so on.

– *RLF-TimersAndConstants-NB*

The IE *RLF-TimersAndConstants-NB* contains UE specific timers and constants applicable for UEs in RRC_CONNECTED.

***RLF-TimersAndConstants-NB* information element**

```
-- ASN1START


RLF-TimersAndConstants-NB-r13 ::=   CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        t301-r13                            ENUMERATED {
                                                ms2500, ms4000, ms6000, ms10000,
                                                ms15000, ms25000, ms40000, ms60000},
        t310-r13                            ENUMERATED {
                                                ms0, ms200, ms500, ms1000, ms2000, ms4000, ms8000},
        n310-r13                            ENUMERATED {
                                                n1, n2, n3, n4, n6, n8, n10, n20},
        t311-r13                            ENUMERATED {
                                                ms1000, ms3000, ms5000, ms10000, ms15000,
                                                ms20000, ms30000},
        n311-r13                            ENUMERATED {
                                                n1, n2, n3, n4, n5, n6, n8, n10},
        ...
    }
}

-- ASN1STOP
```


DAINGEAN_0002327

RLF-TimersAndConstants-NB field descriptions
n3xy
Constants are described in section 7.4. n1 corresponds with 1, n2 corresponds with 2 and so on.
t3xy
Timers are described in section 7.3. Value ms0 corresponds with 0 ms, ms200 corresponds with 200 ms and so on.

– *UplinkPowerControl-NB*

The IE *UplinkPowerControlCommon-NB* and IE *UplinkPowerControlDedicated-NB* are used to specify parameters for uplink power control in the system information and in the dedicated signalling, respectively.

UplinkPowerControl-NB information elements

```
-- ASN1START

UplinkPowerControlCommon-NB-r13 ::= SEQUENCE {
    p0-NominalNPUSCH-r13                INTEGER (-126..24),
    alpha-r13                           ENUMERATED {al0, al04, al05, al06, al07, al08, al09, al1},
    deltaPreambleMsg3-r13               INTEGER (-1..6)
}

UplinkPowerControlDedicated-NB-r13 ::=  SEQUENCE {
    p0-UE-NPUSCH-r13                        INTEGER (-8..7)
}

-- ASN1STOP
```

UplinkPowerControl-NB field descriptions
alpha
Parameter: α See TS 36.213 [23, 5.1.1.1] where al0 corresponds to 0, al04 corresponds to value 0.4, al05 to 0.5, al06 to 0.6, al07 to 0.7, al08 to 0.8, al09 to 0.9 and al1 corresponds to 1. This field applies for uplink power control subframe set 1 if uplink power control subframe sets are configured by tpc-SubframeSet.
deltaPreambleMsg3
Parameter: $\Delta_{PREAMBLE\_Msg3}$ see TS 36.213 [23, 5.1.1.1]. Actual value = IE value * 2 [dB].
p0-NominalNPUSCH
Parameter: $P_{O\_NOMINAL\_PUSCH}(1)$ See TS 36.213 [23, 5.1.1.1], unit dBm. This field is applicable for non-persistent scheduling only.
p0-UE-NPUSCH
Parameter: $P_{O\_UE\_PUSCH}(1)$ See TS 36.213 [23, 5.1.1.1], unit dB. This field is applicable for non-persistent scheduling, only.

6.7.3.3 NB-IoT Security control information elements

Void

6.7.3.4 NB-IoT Mobility control information elements

– *FreqBandIndicator-NB*

The IE *FreqBandIndicator-NB* indicates the E-UTRA operating band as defined in TS 36.101 [42, table 5.5-1].

FreqBandIndicator-NB information element

```
-- ASN1START

FreqBandIndicator-NB-r13 ::=            INTEGER (1.. maxFBI2)
```


DAINGEAN_0002328

```
-- ASN1STOP
```

– *MultiBandInfoList-NB*

MultiBandInfoList-NB information element

```
-- ASN1START

MultiBandInfoList-NB-r13 ::=    SEQUENCE (SIZE (1..maxMultiBands)) OF MultiBandInfo-NB-r13

MultiBandInfo-NB-r13 ::=        SEQUENCE {
    freqBandIndicator-r13           FreqBandIndicator-NB-r13        OPTIONAL,    -- Need OR
    freqBandInfo-r13                NS-PmaxList-NB-r13              OPTIONAL     -- Need OR
}

-- ASN1STOP
```

– *NS-PmaxList-NB*

The IE *NS-PmaxList-NB* concerns a list of *additionalPmax* and *additionalSpectrumEmission* as defined in TS 36.101 [42, table xxxx] for a given frequency band. E-UTRAN does not include the same value of *additionalSpectrumEmission* in *SystemInformationType2-NB* within this list.

***NS-PmaxList-NB* information element**

```
-- ASN1START

NS-PmaxList-NB-r13 ::=          SEQUENCE (SIZE (1..maxNS-Pmax-NB-r13)) OF NS-PmaxValue-NB-r13

NS-PmaxValue-NB-r13 ::=         SEQUENCE {
    additionalPmax-r13              P-Max                       OPTIONAL,   -- Need OR
    additionalSpectrumEmission-r13  AdditionalSpectrumEmission
}

-- ASN1STOP
```

– *T-Reselection-NB*

The IE *T-Reselection-NB* concerns the cell reselection timer $Treselection_{RAT}$ for NB-IoT.

Value in seconds. s0 means 0 second, s3 3 seconds and so on.

T-Reselection-NB information element

```
-- ASN1START

T-Reselection-NB-r13 ::=        ENUMERATED {s0, s3, s6, s9, s12, s15, s18, s21}

-- ASN1STOP
```

6.7.3.5 NB-IoT Measurement information elements

Void

6.7.3.6 NB-IoT Other information elements

– *EstablishmentCause-NB*

The IE *EstablishmentCause* provides the establishment cause for the RRC connection request or the RRC connection resume request as provided by the upper layers.

DAINGEAN_0002329

***EstablishmentCause-NB* information element**

```
-- ASN1START

EstablishmentCause-NB-r13 ::=           ENUMERATED {
                                            mt-Access, mo-Signalling, mo-Data, mo-ExceptionData,
                                            spare4, spare3, spare2, spare1}

-- ASN1STOP
```

– *UE-Capability-NB*

The IE *UE-Capability-NB* is used to convey the NB-IoT UE Radio Access Capability Parameters, see TS 36.306 [5]. The IE *UE-Capability-NB* is transferred in NB-IoT only.

***UE-Capability-NB* information element**

```
-- ASN1START

UE-Capability-NB-r13 ::=        SEQUENCE {
    accessStratumRelease-r13        AccessStratumRelease-NB-r13,
    ue-Category-NB-r13              ENUMERATED {nb1}                    OPTIONAL,
    multipleDRB-r13                 ENUMERATED {supported}              OPTIONAL,
    pdcp-Parameters-r13             PDCP-Parameters-NB-r13              OPTIONAL,
    phyLayerParameters-r13          PhyLayerParameters-NB-r13,
    rf-Parameters-r13               RF-Parameters-NB-r13,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

AccessStratumRelease-NB-r13 ::=     ENUMERATED {rel13, spare7, spare6, spare5, spare4, spare3,
spare2, spare1, ...}

PDCP-Parameters-NB-r13      ::= SEQUENCE {
    supportedROHC-Profiles-r13          SEQUENCE {
        profile0x0002                       BOOLEAN,
        profile0x0003                       BOOLEAN,
        profile0x0004                       BOOLEAN,
        profile0x0006                       BOOLEAN,
        profile0x0102                       BOOLEAN,
        profile0x0103                       BOOLEAN,
        profile0x0104                       BOOLEAN
    },
    maxNumberROHC-ContextSessions-r13   ENUMERATED {cs2, cs4, cs8, cs12}    DEFAULT cs2,
    ...
}

PhyLayerParameters-NB-r13   ::=     SEQUENCE {
    multiTone-r13                       ENUMERATED {supported}          OPTIONAL,
    multiCarrier-r13                    ENUMERATED {supported}          OPTIONAL
    }

RF-Parameters-NB-r13    ::=         SEQUENCE {
    supportedBandList-r13               SupportedBandList-NB-r13,
    multiNS-Pmax-r13                    ENUMERATED {supported}      OPTIONAL
}

SupportedBandList-NB-r13 ::=        SEQUENCE (SIZE (1..maxBands)) OF SupportedBand-NB-r13

SupportedBand-NB-r13    ::=         SEQUENCE {
    band-r13                            FreqBandIndicator-NB-r13,
    powerClassNB-20dBm-r13              ENUMERATED {supported}      OPTIONAL
}


-- ASN1STOP
```


DAINGEAN_0002330

UE-Capability-NB field descriptions
accessStratumRelease Set to rel13 in this version of the specification.
maxNumberROHC-ContextSessions Set to the maximum number of concurrently active ROHC contexts supported by the UE, excluding context sessions that leave all headers uncompressed. cs2 corresponds with 2 (context sessions), cs4 corresponds with 4 and so on. The network ignores this field if the UE supports none of the ROHC profiles in *supportedROHC-Profiles*.
multiCarrier Defines whether the UE supports multi -carrier operation.
multipleDRB Defines whether the UE supports multiple DRBs.
multiNS-Pmax Defines whether the UE supports the mechanisms defined for NB-IoT cells broadcasting *NS-PmaxList*.
multiTone Defines whether the UE supports UL multi-tone transmissions on NPUSCH.
powerClassNB-20dBm Defines whether the UE supports power class 20dBm in NB-IoT for the band, as specified in TS 36.101 [42]. If *powerClassNB-20dBm* is not included, UE supports power class 23 dBm in the NB-IoT band.
supportedBandList Includes the supported NB-IoT bands as defined in TS 36.101 [42].
supportedROHC-Profiles List of supported ROHC profiles as defined in TS 36.323 [8].
ue-Category-NB UE category as defined in TS 36.306 [5]. The field is always included in this version of the specification.

NOTE 1: The IE *UE-Capability-NB* does not include AS security capability information, since these are the same as the security capabilities that are signalled by NAS. Consequently AS need not provide "man-in-the-middle" protection for the security capabilities.

– *UE-RadioPagingInfo-NB*

The *UE-RadioPagingInfo-NB* IE contains UE NB-IoT capability information needed for paging.

UE-RadioPagingInfo-NB information element

```
-- ASN1START

UE-RadioPagingInfo-NB-r13 ::=       SEQUENCE {
    ue-Category-NB-r13              ENUMERATED {nb1}            OPTIONAL,
    ...
}

-- ASN1STOP
```

UE-RadioPagingInfo-NB field descriptions
ue-Category-NB UE NB-IoT category as defined in TS 36.306 [5].

– *UE-TimersAndConstants-NB*

The IE *UE-TimersAndConstants-NB* contains timers and constants used by the UE in either RRC_CONNECTED or RRC_IDLE.

UE-TimersAndConstants-NB information element

```
-- ASN1START

UE-TimersAndConstants-NB-r13 ::=    SEQUENCE {
    t300-r13                            ENUMERATED {
                                            ms2500, ms4000, ms6000, ms10000,
                                            ms15000, ms25000, ms40000, ms60000},
```


DAINGEAN_0002331

```
    t301-r13                            ENUMERATED {
                                            ms2500, ms4000, ms6000, ms10000,
                                            ms15000, ms25000, ms40000, ms60000},
    t310-r13                            ENUMERATED {
                                            ms0, ms200, ms500, ms1000, ms2000, ms4000, ms8000},
    n310-r13                            ENUMERATED {
                                            n1, n2, n3, n4, n6, n8, n10, n20},
    t311-r13                            ENUMERATED {
                                            ms1000, ms3000, ms5000, ms10000, ms15000,
                                            ms20000, ms30000},
    n311-r13                            ENUMERATED {
                                            n1, n2, n3, n4, n5, n6, n8, n10},
    ...
}

-- ASN1STOP
```

***UE-TimersAndConstants-NB* field descriptions**
n3xy
Constants are described in section 7.4. n1 corresponds with 1, n2 corresponds with 2 and so on.
t3xy
Timers are described in section 7.3. Value ms0 corresponds with 0 ms, ms200 corresponds with 200 ms and so on.

6.7.4 NB-IoT RRC multiplicity and type constraint values

– Multiplicity and type constraint definitions

```
-- ASN1START

maxNPRACH-Resources-NB-r13  INTEGER ::= 3   -- Maximum number of NPRACH resources for NB-IoT
maxDRB-NB-r13               INTEGER ::= 2   -- Maximum number of Data Radio Bearers for NB-IoT
maxNS-Pmax-NB-r13           INTEGER ::= 4   -- Maximum number of NS and P-Max values per band
maxSI-Message-NB-r13        INTEGER ::= 8   -- Maximum number of SI messages for NB-IoT

-- ASN1STOP
```

– End of NBIOT-RRC-Definitions

```
-- ASN1START

END

-- ASN1STOP
```

6.7.5 Direct Indication Information

Direct Indication information is transmitted on NPDCCH using P-RNTI but without associated *Paging-NB* message. Table 6.7.5-1 defines the Direct Indication information, see TS 36.212 [22, 6.4.3.3].

When bit n is set to 1, the UE shall behave as if the corresponding field is set in the *Paging-NB* message, see 5.3.2.3. Bit 1 is the least significant bit.

Table 6.7.5-1: Direct Indication information

Bit	Field in *Direct Indication information*
1	*systemInfoModification*
2	*systemInfoModification-eDRX*
3, 4, 5, 6, 7, 8	Not used, and shall be ignored by UE if received

DAINGEAN_0002332

7 Variables and constants

7.1 UE variables

NOTE: To facilitate the specification of the UE behavioural requirements, UE variables are represented using ASN.1. Unless explicitly specified otherwise, it is however up to UE implementation how to store the variables. The optionality of the IEs in ASN.1 is used only to indicate that the values may not always be available.

– *EUTRA-UE-Variables*

This ASN.1 segment is the start of the E-UTRA UE variable definitions.

```
-- ASN1START

EUTRA-UE-Variables DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    AbsoluteTimeInfo-r10,
    AreaConfiguration-r10,
    AreaConfiguration-v1130,
    CarrierFreqGERAN,
    CellIdentity,
    ConnEstFailReport-r11,
    SpeedStateScaleFactors,
    C-RNTI,
    LoggingDuration-r10,
    LoggingInterval-r10,
    LogMeasInfo-r10,
    MeasCSI-RS-Id-r12,
    MeasId,
    MeasId-v1250,
    MeasIdToAddModList,
    MeasIdToAddModListExt-r12,
    MeasIdToAddModList-v1310,
    MeasIdToAddModListExt-v1310,
    MeasObjectToAddModList,
    MeasObjectToAddModList-v9e0,
    MeasObjectToAddModListExt-r13,
    MeasScaleFactor-r12,
    MobilityStateParameters,
    NeighCellConfig,
    PhysCellId,
    PhysCellIdCDMA2000,
    PhysCellIdGERAN,
    PhysCellIdUTRA-FDD,
    PhysCellIdUTRA-TDD,
    PLMN-Identity,
    PLMN-IdentityList3-r11,
    QuantityConfig,
    ReportConfigToAddModList,
    RLF-Report-r9,
    TargetMBSFN-AreaList-r12,
    TraceReference-r10,
    VisitedCellInfoList-r12,
    maxCellMeas,
    maxCSI-RS-Meas-r12,
    maxMeasId,
    maxMeasId-r12,
    UL-DelayConfig-r13,
    WLAN-CarrierInfo-r13,
    WLAN-Identifiers-r12,
    WLAN-Id-List-r13,
    WLAN-Status-r13


FROM EUTRA-RRC-Definitions;

-- ASN1STOP
```


DAINGEAN_0002333

– *VarConnEstFailReport*

The UE variable *VarConnEstFailReport* includes the connection establishment failure information.

VarConnEstFailReport UE variable

```
-- ASN1START

VarConnEstFailReport-r11 ::=        SEQUENCE {
    connEstFailReport-r11               ConnEstFailReport-r11,
    plmn-Identity-r11                   PLMN-Identity
}

-- ASN1STOP
```

– *VarLogMeasConfig*

The UE variable *VarLogMeasConfig* includes the configuration of the logging of measurements to be performed by the UE while in RRC_IDLE, covering intra-frequency, inter-frequency, inter-RAT mobility and MBSFN related measurements. If MBSFN logging is configured, the UE performs logging of measurements while in both RRC_IDLE and RRC_CONNECTED. Otherwise, the UE performs logging of measurements only while in RRC_IDLE.

VarLogMeasConfig UE variable

```
-- ASN1START

VarLogMeasConfig-r10 ::=                SEQUENCE {
    areaConfiguration-r10           AreaConfiguration-r10       OPTIONAL,
    loggingDuration-r10             LoggingDuration-r10,
    loggingInterval-r10             LoggingInterval-r10
}

VarLogMeasConfig-r11 ::=            SEQUENCE {
    areaConfiguration-r10               AreaConfiguration-r10       OPTIONAL,
    areaConfiguration-v1130             AreaConfiguration-v1130     OPTIONAL,
    loggingDuration-r10                 LoggingDuration-r10,
    loggingInterval-r10                 LoggingInterval-r10
}

VarLogMeasConfig-r12 ::=            SEQUENCE {
    areaConfiguration-r10               AreaConfiguration-r10       OPTIONAL,
    areaConfiguration-v1130             AreaConfiguration-v1130     OPTIONAL,
    loggingDuration-r10                 LoggingDuration-r10,
    loggingInterval-r10                 LoggingInterval-r10,
    targetMBSFN-AreaList-r12            TargetMBSFN-AreaList-r12    OPTIONAL
}

-- ASN1STOP
```

– *VarLogMeasReport*

The UE variable *VarLogMeasReport* includes the logged measurements information.

VarLogMeasReport UE variable

```
-- ASN1START

VarLogMeasReport-r10 ::=                SEQUENCE {
    traceReference-r10                  TraceReference-r10,
    traceRecordingSessionRef-r10            OCTET STRING (SIZE (2)),
    tce-Id-r10                          OCTET STRING (SIZE (1)),
    plmn-Identity-r10                   PLMN-Identity,
    absoluteTimeInfo-r10                AbsoluteTimeInfo-r10,
    logMeasInfoList-r10                 LogMeasInfoList2-r10
}

VarLogMeasReport-r11 ::=            SEQUENCE {
```


DAINGEAN_0002334

```
    traceReference-r10                  TraceReference-r10,
    traceRecordingSessionRef-r10        OCTET STRING (SIZE (2)),
    tce-Id-r10                          OCTET STRING (SIZE (1)),
    plmn-IdentityList-r11               PLMN-IdentityList3-r11,
    absoluteTimeInfo-r10                AbsoluteTimeInfo-r10,
    logMeasInfoList-r10                 LogMeasInfoList2-r10
}

LogMeasInfoList2-r10 ::=                SEQUENCE (SIZE (1..maxLogMeas-r10)) OF LogMeasInfo-r10

-- ASN1STOP
```

– *VarMeasConfig*

The UE variable *VarMeasConfig* includes the accumulated configuration of the measurements to be performed by the UE, covering intra-frequency, inter-frequency and inter-RAT mobility related measurements.

NOTE: The amount of measurement configuration information, which a UE is required to store, is specified in subclause 11.1. If the number of frequencies configured for a particular RAT exceeds the minimum performance requirements specified in [16], it is up to UE implementation which frequencies of that RAT are measured. If the total number of frequencies for all RATs provided to the UE in the measurement configuration exceeds the minimum performance requirements specified in [16], it is up to UE implementation which frequencies/RATs are measured.

***VarMeasConfig* UE variable**

```
-- ASN1START

VarMeasConfig ::=                   SEQUENCE {
    -- Measurement identities
    measIdList                          MeasIdToAddModList                  OPTIONAL,
    measIdListExt-r12                   MeasIdToAddModListExt-r12           OPTIONAL,
    measIdList-v1310                        MeasIdToAddModList-v1310                OPTIONAL,
    measIdListExt-v1310                 MeasIdToAddModListExt-v1310         OPTIONAL,
    -- Measurement objects
    measObjectList                      MeasObjectToAddModList              OPTIONAL,
    measObjectListExt-r13               MeasObjectToAddModListExt-r13       OPTIONAL,
    measObjectList-v9i0                 MeasObjectToAddModList-v9e0         OPTIONAL,
    -- Reporting configurations
    reportConfigList                    ReportConfigToAddModList            OPTIONAL,
    -- Other parameters
    quantityConfig                      QuantityConfig                      OPTIONAL,
    measScaleFactor-r12                 MeasScaleFactor-r12                 OPTIONAL,
    s-Measure                           INTEGER (-140..-44)                 OPTIONAL,
    speedStatePars                      CHOICE {
        release                             NULL,
        setup                               SEQUENCE {
            mobilityStateParameters             MobilityStateParameters,
            timeToTrigger-SF                    SpeedStateScaleFactors
        }
    }                                                                       OPTIONAL,
    allowInterruptions-r11          BOOLEAN                         OPTIONAL
}

-- ASN1STOP
```

– *VarMeasReportList*

The UE variable *VarMeasReportList* includes information about the measurements for which the triggering conditions have been met.

***VarMeasReportList* UE variable**

```
-- ASN1START

VarMeasReportList ::=               SEQUENCE (SIZE (1..maxMeasId)) OF VarMeasReport
VarMeasReportList-r12 ::=           SEQUENCE (SIZE (1..maxMeasId-r12)) OF VarMeasReport

VarMeasReport ::=                   SEQUENCE {
    -- List of measurement that have been triggered
```


DAINGEAN_0002335

```
    measId                              MeasId,
    measId-v1250                        MeasId-v1250                    OPTIONAL,
    cellsTriggeredList                  CellsTriggeredList              OPTIONAL,
    csi-RS-TriggeredList-r12            CSI-RS-TriggeredList-r12        OPTIONAL,
    numberOfReportsSent                 INTEGER
}

CellsTriggeredList ::=              SEQUENCE (SIZE (1..maxCellMeas)) OF CHOICE {
    physCellIdEUTRA                         PhysCellId,
    physCellIdUTRA                          CHOICE {
        fdd                                     PhysCellIdUTRA-FDD,
        tdd                                     PhysCellIdUTRA-TDD
    },
    physCellIdGERAN                         SEQUENCE {
        carrierFreq                             CarrierFreqGERAN,
        physCellId                              PhysCellIdGERAN
    },
    physCellIdCDMA2000                      PhysCellIdCDMA2000,
    wlan-Identifiers-r13                    WLAN-Identifiers-r12
}

CSI-RS-TriggeredList-r12 ::=        SEQUENCE (SIZE (1..maxCSI-RS-Meas-r12)) OF MeasCSI-RS-Id-r12

-- ASN1STOP
```

– *VarMobilityHistoryReport*

The UE variable *VarMobilityHistoryReport* includes the mobility history information.

```
-- ASN1START
VarMobilityHistoryReport-r12 ::=    VisitedCellInfoList-r12

-- ASN1STOP
```

– *VarRLF-Report*

The UE variable *VarRLF-Report* includes the radio link failure information or handover failure information.

***VarRLF-Report* UE variable**

```
-- ASN1START

VarRLF-Report-r10 ::=               SEQUENCE {
    rlf-Report-r10                          RLF-Report-r9,
    plmn-Identity-r10                       PLMN-Identity
}

VarRLF-Report-r11 ::=               SEQUENCE {
    rlf-Report-r10                      RLF-Report-r9,
    plmn-IdentityList-r11               PLMN-IdentityList3-r11
}

-- ASN1STOP
```

– *VarShortMAC-Input*

The UE variable *VarShortMAC-Input* specifies the input used to generate the shortMAC-I.

***VarShortMAC-Input* UE variable**

```
-- ASN1START

VarShortMAC-Input ::=               SEQUENCE {
    cellIdentity                        CellIdentity,
    physCellId                          PhysCellId,
    c-RNTI                              C-RNTI
}
-- ASN1STOP
```


DAINGEAN_0002336

***VarShortMAC-Input* field descriptions**
cellIdentity Set to CellIdentity of the current cell.
c-RNTI Set to C-RNTI that the UE had in the PCell it was connected to prior to the failure.
physCellId Set to the physical cell identity of the PCell the UE was connected to prior to the failure.

– *VarShortResumeMAC-Input*

The UE variable *VarShortResumeMAC-Input* specifies the input used to generate the *shortResumeMAC-I* during RRC Connection Resume procedure.

VarShortResumeMAC-Input UE variable

```
-- ASN1START

VarShortResumeMAC-Input-r13 ::=     SEQUENCE {
    cellIdentity-r13                        CellIdentity,
    physCellId-r13                          PhysCellId,
    c-RNTI-r13                              C-RNTI,
    resumeDiscriminator-r13                 BIT STRING(SIZE(1))
}

-- ASN1STOP
```

VarShortResumeMAC-Input field descriptions
cellIdentity Set to CellIdentity of the current cell.
c-RNTI Set to C-RNTI that the UE had in the PCell it was connected to prior to suspension of the RRC connection.
physCellId Set to the physical cell identity of the PCell the UE was connected to prior to suspension of the RRC connection..
resumeDiscriminator A constant that allows differentiation in the calculation of the MAC-I for *shortResumeMAC-I* The resumeDiscriminator is set to '1'

– *VarWLAN-MobilityConfig*

The UE variable *VarWLAN-MobilityConfig* includes information about WLAN for access selection and mobility.

VarWLAN-MobilityConfig UE variable

```
-- ASN1START

VarWLAN-MobilityConfig ::=              SEQUENCE {
    wlan-MobilitySet-r13                WLAN-Id-List-r13            OPTIONAL,
    successReportRequested              ENUMERATED {true}           OPTIONAL
}

-- ASN1STOP
```

***VarWLAN-MobilityConfig* field descriptions**
wlan-MobilitySet Indicates the WLAN mobility set configured.
successReportRequested Indicates whether the UE should report successful connection to WLAN. Applicable to LWA and LWIP.

– *VarWLAN-Status*

The UE variable *VarWLAN-Status* includes information about the status of WLAN connection for LWA.

DAINGEAN_0002337

***VarWLAN-Status* UE variable**

```
-- ASN1START

VarWLAN-Status-r13 ::=              SEQUENCE {
    status-r13                              WLAN-Status-r13
}

-- ASN1STOP
```

***VarWLAN-Status* field descriptions**
status
Indicates the connection status to WLAN and causes for connection failures.

– Multiplicity and type constraint definitions

This section includes multiplicity and type constraints applicable (only) for UE variables.

```
-- ASN1START

maxLogMeas-r10              INTEGER ::= 4060-- Maximum number of logged measurement entries
                                        --  that can be stored by the UE

-- ASN1STOP
```

– End of *EUTRA-UE-Variables*

```
-- ASN1START

END

-- ASN1STOP
```

7.1a NB-IoT UE variables

NOTE: To facilitate the specification of the UE behavioural requirements, UE variables are represented using ASN.1. Unless explicitly specified otherwise, it is however up to UE implementation how to store the variables. The optionality of the IEs in ASN.1 is used only to indicate that the values may not always be available.

– *NBIOT-UE-Variables*

This ASN.1 segment is the start of the NB-IoT UE variable definitions.

```
-- ASN1START

NBIOT-UE-Variables DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    VarShortMAC-Input,
    VarShortResumeMAC-Input-r13

FROM EUTRA-UE-Variables;

VarShortMAC-Input-NB-r13        ::=     VarShortMAC-Input

VarShortResumeMAC-Input-NB-r13  ::=     VarShortResumeMAC-Input-r13


-- ASN1STOP
```


DAINGEAN_0002338

– End of *NBIOT-UE-Variables*

```
-- ASN1START

END

-- ASN1STOP
```

7.2 Counters

Counter	Reset	Incremented	When reaching max value

DAINGEAN_0002339

7.3 Timers (Informative)

Timer	Start	Stop	At expiry
T300 NOTE	Transmission of *RRCConnectionRequest* or *RRCConnectionResumeRequest*	Reception of *RRCConnectionSetup*, *RRCConnectionReject* or *RRCConnectionResume* message, cell re-selection and upon abortion of connection establishment by upper layers	Perform the actions as specified in 5.3.3.6
T301 NOTE	Transmission of *RRCConnectionReestablishmentRequest*	Reception of *RRCConnectionReestablishment* or *RRCConnectionReestablishmentReject* message as well as when the selected cell becomes unsuitable	Go to RRC_IDLE
T302	Reception of *RRCConnectionReject* while performing RRC connection establishment	Upon entering RRC_CONNECTED and upon cell re-selection	Inform upper layers about barring alleviation as specified in 5.3.3.7
T303	Access barred while performing RRC connection establishment for mobile originating calls	Upon entering RRC_CONNECTED and upon cell re-selection	Inform upper layers about barring alleviation as specified in 5.3.3.7
T304	Reception of *RRCConnectionReconfiguration* message including the *MobilityControl Info* or reception of *MobilityFromEUTRACommand* message including *CellChangeOrder*	Criterion for successful completion of handover within E-UTRA, handover to E-UTRA or cell change order is met (the criterion is specified in the target RAT in case of inter-RAT)	In case of cell change order from E-UTRA or intra E-UTRA handover, initiate the RRC connection re-establishment procedure; In case of handover to E-UTRA, perform the actions defined in the specifications applicable for the source RAT.
T305	Access barred while performing RRC connection establishment for mobile originating signalling	Upon entering RRC_CONNECTED and upon cell re-selection	Inform upper layers about barring alleviation as specified in 5.3.3.7
T306	Access barred while performing RRC connection establishment for mobile originating CS fallback.	Upon entering RRC_CONNECTED and upon cell re-selection	Inform upper layers about barring alleviation as specified in 5.3.3.7
T307	Reception of *RRCConnectionReconfiguration* message including *MobilityControlInfoSCG*	Successful completion of random access on the PSCell, upon initiating re-establishment and upon SCG release	Inform E-UTRAN about the SCG change failure by initiating the SCG failure information procedure as specified in 5.6.13.
T308	Access barred due to ACDC while performing RRC connection establishment subject to ACDC	Upon entering RRC_CONNECTED and upon cell re-selection	Inform upper layers about barring alleviation for ACDC as specified in 5.3.3.7
T310 NOTE	Upon detecting physical layer problems for the PCell i.e. upon receiving N310 consecutive out-of-sync indications from lower layers	Upon receiving N311 consecutive in-sync indications from lower layers for the PCell, upon triggering the handover procedure and upon initiating the connection re-establishment procedure	If security is not activated: go to RRC_IDLE else: initiate the connection re-establishment procedure
T311 NOTE	Upon initiating the RRC connection re-establishment procedure	Selection of a suitable E-UTRA cell or a cell using another RAT.	Enter RRC_IDLE

DAINGEAN_0002340

Timer	Start	Stop	At expiry
T312	Upon triggering a measurement report for a measurement identity for which T312 has been configured, while T310 is running	Upon receiving N311 consecutive in-sync indications from lower layers, upon triggering the handover procedure, upon initiating the connection re-establishment procedure, and upon the expiry of T310	If security is not activated: go to RRC_IDLE else: initiate the connection re-establishment procedure
T313	Upon detecting physical layer problems for the PSCell i.e. upon receiving N313 consecutive out-of-sync indications from lower layers	Upon receiving N314 consecutive in-sync indications from lower layers for the PSCell, upon initiating the connection re-establishment procedure, upon SCG release and upon receiving *RRCConnectionReconfiguration* including *MobilityControlInfoSCG*	Inform E-UTRAN about the SCG radio link failure by initiating the SCG failure information procedure as specified in 5.6.13.
T320	Upon receiving *t320* or upon cell (re)selection to E-UTRA from another RAT with validity time configured for dedicated priorities (in which case the remaining validity time is applied).	Upon entering RRC_CONNECTED, when PLMN selection is performed on request by NAS, or upon cell (re)selection to another RAT (in which case the timer is carried on to the other RAT).	Discard the cell reselection priority information provided by dedicated signalling.
T321	Upon receiving *measConfig* including a *reportConfig* with the *purpose* set to *reportCGI*	Upon acquiring the information needed to set all fields of *cellGlobalId* for the requested cell, upon receiving *measConfig* that includes removal of the *reportConfig* with the *purpose* set to *reportCGI*	Initiate the measurement reporting procedure, stop performing the related measurements and remove the corresponding *measId*
T325	Timer (re)started upon receiving *RRCConnectionReject* message with *deprioritisationTimer*.		Stop deprioritisation of all frequencies or E-UTRA signalled by *RRCConnectionReject*.
T330	Upon receiving *LoggedMeasurementConfiguration* message	Upon log volume exceeding the suitable UE memory, upon initiating the release of *LoggedMeasurementConfiguration* procedure	Perform the actions specified in 5.6.6.4
T340	Upon transmitting *UEAssistanceInformation* message with *powerPrefIndication* set to *normal*	Upon initiating the connection re-establishment procedure	No action.
T350	Upon entering RRC_IDLE if *t350* has been received in wlan-OffloadInfo.	Upon entering RRC_CONNECTED, or upon cell reselection.	Perform the actions specified in 5.6.12.4.
T351	Reception of *RRCConnectionReconfiguration* message including the associationTimer in *WLAN-MobilityConfig*.	Upon successful connection to WLAN, upon WLAN connection failure, upon leaving RRC_CONNECTED, upon triggering the handover procedure, or upon initiating the connection re-establishment procedure.	Perform WLAN Connection Status Reporting specified in 5.6.15.2.
T360	Upon performing the redistribution target selection as specified in TS 36.304 [4].	Upon entering RRC_CONNECTED, upon receiving a Paging message including *redistributionIndication*; upon reselecting a cell not belonging to the redistribution target.	Stop considering a frequency or cell to be redistribution target, and perform the redistribution target selection if the condition specified in TS 36.304 [4] is met.

DAINGEAN_0002341

Timer	Start	Stop	At expiry
T370	Upon receiving *SL-DiscConfig* including a *discSysInfoToReportConfig* set to *setup*.	Upon initiating the transmission of *SidelinkUEInformation* including *discSysInfoReportFreqList*, upon receiving *SL-DiscConfig* including *discSysInfoToReportConfig* set to *release*, upon handover and re-establishment.	Release *discSysInfoToReportConfig*.
NOTE: Only the timers marked with "NOTE" are applicable to NB-IoT.			

7.4 Constants

Constant	Usage
N310	Maximum number of consecutive "out-of-sync" indications for the PCell received from lower layers
N311	Maximum number of consecutive "in-sync" indications for the PCell received from lower layers
N313	Maximum number of consecutive "out-of-sync" indications for the PSCell received from lower layers
N314	Maximum number of consecutive "in-sync" indications for the PSCell received from lower layers

8 Protocol data unit abstract syntax

8.1 General

The RRC PDU contents in clause 6 and clause 10 are described using abstract syntax notation one (ASN.1) as specified in ITU-T Rec. X.680 [13] and X.681 [14]. Transfer syntax for RRC PDUs is derived from their ASN.1 definitions by use of Packed Encoding Rules, unaligned as specified in ITU-T Rec. X.691 [15].

The following encoding rules apply in addition to what has been specified in X.691:

- When a bit string value is placed in a bit-field as specified in 15.6 to 15.11 in X.691, the leading bit of the bit string value shall be placed in the leading bit of the bit-field, and the trailing bit of the bit string value shall be placed in the trailing bit of the bit-field.

NOTE: The terms 'leading bit' and 'trailing bit' are defined in ITU-T Rec. X.680. When using the 'bstring' notation, the leading bit of the bit string value is on the left, and the trailing bit of the bit string value is on the right.

- When decoding types constrained with the ASN.1 Contents Constraint ("CONTAINING"), automatic decoding of the contained type should not be performed because errors in the decoding of the contained type should not cause the decoding of the entire RRC message PDU to fail. It is recommended that the decoder first decodes the outer PDU type that contains the OCTET STRING or BIT STRING with the Contents Constraint, and then decodes the contained type that is nested within the OCTET STRING or BIT STRING as a separate step.

- When decoding a) RRC message PDUs, b) BIT STRING constrained with a Contents Constraint, or c) OCTET STRING constrained with a Contents Constraint, PER decoders are required to never report an error if there are extraneous zero or non-zero bits at the end of the encoded RRC message PDU, BIT STRING or OCTET STRING.

8.2 Structure of encoded RRC messages

An RRC PDU, which is the bit string that is exchanged between peer entities/ across the radio interface contains the basic production as defined in X.691.

DAINGEAN_0002342

RRC PDUs shall be mapped to and from PDCP SDUs (in case of DCCH) or RLC SDUs (in case of PCCH, BCCH, BR-BCCH, CCCH or MCCH) upon transmission and reception as follows:

- when delivering an RRC PDU as an PDCP SDU to the PDCP layer for transmission, the first bit of the RRC PDU shall be represented as the first bit in the PDCP SDU and onwards; and
- when delivering an RRC PDU as an RLC SDU to the RLC layer for transmission, the first bit of the RRC PDU shall be represented as the first bit in the RLC SDU and onwards; and
- upon reception of an PDCP SDU from the PDCP layer, the first bit of the PDCP SDU shall represent the first bit of the RRC PDU and onwards; and
- upon reception of an RLC SDU from the RLC layer, the first bit of the RLC SDU shall represent the first bit of the RRC PDU and onwards.

8.3 Basic production

The 'basic production' is obtained by applying UNALIGNED PER to the abstract syntax value (the ASN.1 description) as specified in X.691. It always contains a multiple of 8 bits.

8.4 Extension

The following rules apply with respect to the use of protocol extensions:

- A transmitter compliant with this version of the specification shall, unless explicitly indicated otherwise on a PDU type basis, set the extension part empty. Transmitters compliant with a later version may send non-empty extensions;
- A transmitter compliant with this version of the specification shall set spare bits to zero;

8.5 Padding

If the encoded RRC message does not fill a transport block, the RRC layer shall add padding bits. This applies to PCCH, BCCH and BR-BCCH.

Padding bits shall be set to 0 and the number of padding bits is a multiple of 8.

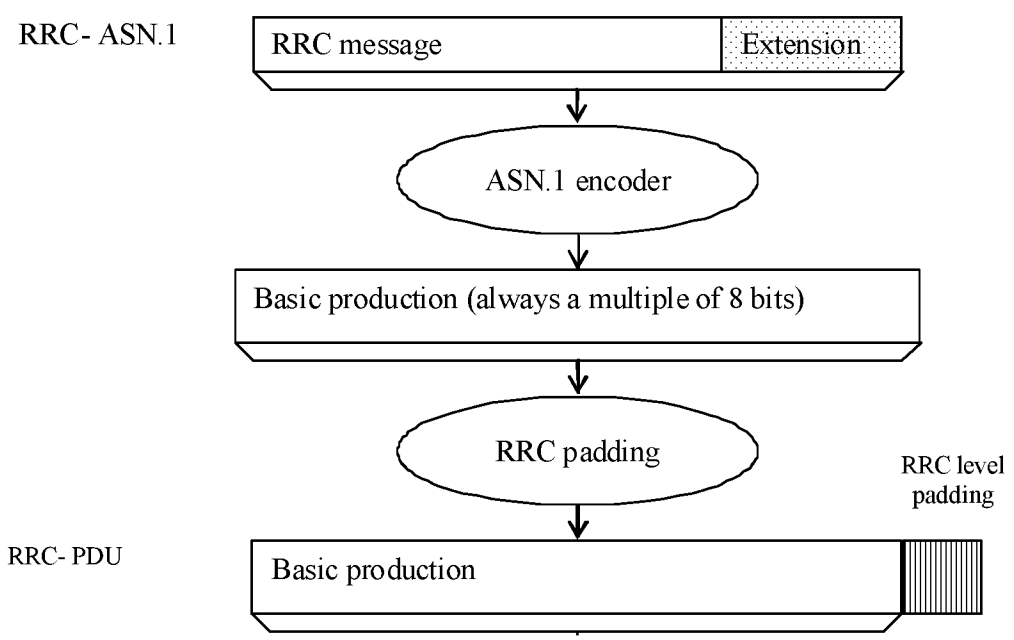


Figure 8.5-1: RRC level padding

DAINGEAN_0002343

9 Specified and default radio configurations

Specified and default configurations are configurations of which the details are specified in the standard. Specified configurations are fixed while default configurations can be modified using dedicated signalling.

9.1 Specified configurations

9.1.1 Logical channel configurations

9.1.1.1 BCCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	TM		
MAC configuration	TM		

NOTE: RRC will perform padding, if required due to the granularity of the TF signalling, as defined in 8.5.

9.1.1.2 CCCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	TM		
MAC configuration		Normal MAC headers are used	
Logical channel configuration			
priority	1	Highest priority	
prioritisedBitRate	infinity		
bucketSizeDuration	N/A		
logicalChannelGroup	0		
logicalChannelSR-Mask-r9	release		v920

9.1.1.3 PCCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	TM		
MAC configuration	TM		

NOTE: RRC will perform padding, if required due to the granularity of the TF signalling, as defined in 8.5.

9.1.1.4 MCCH and MTCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	UM		
sn-FieldLength	size5		
t-Reordering	0		

DAINGEAN_0002344

9.1.1.5 SBCCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	TM		
MAC configuration	TM		

NOTE: RRC will perform padding, if required due to the granularity of the TF signalling, as defined in 8.5.

9.1.1.6 STCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration			
discardTimer	Undefined	Up to UE implementation	
pdcp-SN-Size	16		
maxCID	15		
profiles			
RLC configuration		Uni-directional UM RLC UM window size is set to 0	
sn-FieldLength	5		
logicalChannelIdentity	Undefined	Selected by the transmitting UE, up to UE implementation	
Logical channel configuration			
priority	Undefined	Selected by the transmitting UE, up to UE implementation	
prioritisedBitRate	Undefined	Selected by the transmitting UE, up to UE implementation	
bucketSizeDuration	Undefined	Selected by the transmitting UE, up to UE implementation	
logicalChannelGroup	3		
MAC configuration			
maxHARQ-Tx	4		

9.1.1.7 SC-MCCH and SC-MTCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	UM		
sn-FieldLength	size5		
t-Reordering	0		

9.1.1.8 BR-BCCH configuration

Parameters

Name	Value	Semantics description	Ver
PDCP configuration	N/A		
RLC configuration	TM		
MAC configuration	TM		

NOTE: RRC will perform padding, if required due to the granularity of the TF signalling, as defined in 8.5.

DAINGEAN_0002345

9.1.2 SRB configurations

9.1.2.1 SRB1

Parameters

Name	Value	Semantics description	Ver
RLC configuration			
logicalChannelIdentity	1		

9.1.2.1a SRB1bis

Parameters

Name	Value	Semantics description	Ver
RLC configuration			
logicalChannelIdentity	3		

9.1.2.2 SRB2

Parameters

Name	Value	Semantics description	Ver
RLC configuration			
logicalChannelIdentity	2		

9.2 Default radio configurations

The following sections only list default values for REL-8 parameters included in protocol version v8.5.0. For all fields introduced in a later protocol version, the default value is "released" unless explicitly specified otherwise. If UE is to apply default configuration while it is configured with some critically extended fields, the UE shall apply the original version with only default values. For the following fields, introduced in a protocol version later than v8.5.0, the default corresponds with "value not applicable":

- *codeBookSubsetRestriction-v920*;
- *pmi-RI-Report*;

NOTE 1: Value "N/A" indicates that the UE does not apply a specific value (i.e. upon switching to a default configuration, E-UTRAN can not assume the UE keeps the previously configured value). This implies that E-UTRAN needs to configure a value before invoking the related functionality.

NOTE 2: In general, the signalling should preferably support a "release" option for fields introduced after v8.5.0. The "value not applicable" should be used restrictively, mainly limited to for fields which value is relevant only if another field is set to a value other than its default.

9.2.1 SRB configurations

9.2.1.1 SRB1

Parameters

Name	Value	NB-IoT	Semantics description	Ver
RLC configuration CHOICE	am	am		
ul-RLC-Config *>t-PollRetransmit* *>pollPDU* *>pollByte*	 ms45 infinity infinity	 ms25000 N/A N/A		

DAINGEAN_0002346

Name	Value	NB-IoT	Semantics description	Ver
>maxRetxThreshold	t4	t4		
dl-RLC-Config *>t-Reordering* *>t-StatusProhibit* *>enableStatusReportSN-Gap*	 ms35 ms0 N/A	 N/A N/A disabled		
Logical channel configuration				
priority	1	1	Highest priority	
prioritisedBitRate	infinity	N/A		
bucketSizeDuration	N/A	N/A		
logicalChannelGroup	0	N/A		
logicalChannelSR-Prohibit	N/A	TRUE		

9.2.1.2 SRB2

Parameters

Name	Value	Semantics description	Ver
RLC configuration CHOICE	am		
ul-RLC-Config *>t-PollRetransmit* *>pollPDU* *>pollByte* *>maxRetxThreshold*	 ms45 infinity infinity t4		
dl-RLC-Config *>t-Reordering* *>t-StatusProhibit*	 ms35 ms0		
Logical channel configuration			
priority	3		
prioritisedBitRate	infinity		
bucketSizeDuration	N/A		
logicalChannelGroup	0		

9.2.2 Default MAC main configuration

Parameters

Name	Value	NB-IoT	Semantics description	Ver
MAC main configuration				
maxHARQ-tx	n5	N/A		
periodicBSR-Timer	infinity	pp8		
retxBSR-Timer	sf2560	infinity		
ttiBundling	FALSE	N/A		
drx-Config	release	N/A		
phr-Config	release	N/A		

9.2.3 Default semi-persistent scheduling configuration

SPS-Config *>sps-ConfigDL* *>sps-ConfigUL*	 release release		

9.2.4 Default physical channel configuration

Parameters (not applicable for NB-IoT)

Name	Value	Semantics description	Ver
PDSCH-ConfigDedicated *>p-a*	 dB0		

DAINGEAN_0002347

Name	Value	Semantics description	Ver
PUCCH-ConfigDedicated *> tdd-AckNackFeedbackMode* *>ackNackRepetition*	 bundling release	 Only valid for TDD mode	
PUSCH-ConfigDedicated *>betaOffset-ACK-Index* *>betaOffset-RI-Index* *>betaOffset-CQI-Index*	 10 12 15		
UplinkPowerControlDedicated *>p0-UE-PUSCH* *>deltaMCS-Enabled* *>accumulationEnabled* *>p0-UE-PUCCH* *>pSRS-Offset* *> filterCoefficient*	 0 en0 (disabled) TRUE 0 7 fc4		
tpc-pdcch-ConfigPUCCH	release		
tpc-pdcch-ConfigPUSCH	release		
CQI-ReportConfig *> CQI-ReportPeriodic* *> cqi-ReportModeAperiodic* *> nomPDSCH-RS-EPRE-Offset*	 release N/A N/A		
SoundingRS-UL-ConfigDedicated	release		
AntennaInfoDedicated *>transmissionMode* *>codebookSubsetRestriction* *>ue-TransmitAntennaSelection*	 tm1, tm2 N/A release	 If the number of PBCH antenna ports is one, tm1 is used as default; otherwise tm2 is used as default	
SchedulingRequestConfig	release		

Parameters applicable for NB-IoT

Name	Value	Semantics description	Ver
NPUSCH-ConfigDedicated-NB *> ack-NACK-NumRepetitions* *> npusch-AllSymbols*	 r8 TRUE		
UplinkPowerControlDedicated *>p0-UE-NPUSCH*	 0		

9.2.5 Default values timers and constants

Parameters

Name	Value	Semantics description	Ver
t310	ms1000		
n310	n1		
t311	ms1000		
n311	n1		

9.3 Sidelink pre-configured parameters

9.3.1 Specified parameters

This section only list parameters which value is specified in the standard.

Parameters

Name	Value	Semantics description	Ver
preconfigSync *>syncTxParameters*			

DAINGEAN_0002348

Name	Value	Semantics description	Ver
>>alpha		0	
preconfigComm *>sc-TxParameters* *>>alpha* *>dataTxParameters* *>>alpha*		 0 0	

9.3.2 Pre-configurable parameters

This ASN.1 segment is the start of the E-UTRA definitions of pre-configured sidelink parameters.

NOTE 1: Upper layers are assumed to provide a set of pre-configured parameters that are valid at the current UE location if any, see TS 24.334 [69, 10.2].

```
-- ASN1START

EUTRA-Sidelink-Preconf DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    AdditionalSpectrumEmission,
    ARFCN-ValueEUTRA-r9,
    FilterCoefficient,
    maxSL-TxPool-r12,
    maxSL-CommRxPoolPreconf-v1310,
    maxSL-CommTxPoolPreconf-v1310,
    maxSL-DiscRxPoolPreconf-r13,
    maxSL-DiscTxPoolPreconf-r13,
    P-Max,
    ReselectionInfoRelay-r13,
    SL-CP-Len-r12,
    SL-HoppingConfigComm-r12,
    SL-OffsetIndicatorSync-r12,
    SL-PeriodComm-r12,
    RSRP-RangeSL3-r12,
    SL-PriorityList-r13,
    SL-TF-ResourceConfig-r12,
    SL-TRPT-Subset-r12,
    P0-SL-r12,
    TDD-ConfigSL-r12
FROM EUTRA-RRC-Definitions;

-- ASN1STOP
```

– *SL-Preconfiguration*

The IE *SL-Preconfiguration* includes the sidelink pre-configured parameters.

SL-Preconfiguration information elements

```
-- ASN1START

SL-Preconfiguration-r12 ::=     SEQUENCE {
    preconfigGeneral-r12                SL-PreconfigGeneral-r12,
    preconfigSync-r12                   SL-PreconfigSync-r12,
    preconfigComm-r12                   SL-PreconfigCommPoolList4-r12,
    ...,
    [[  preconfigComm-v1310             SEQUENCE {
            commRxPoolList-r13          SL-PreconfigCommRxPoolList-r13,
            commTxPoolList-r13          SL-PreconfigCommTxPoolList-r13      OPTIONAL
        }                                                                       OPTIONAL,
        preconfigDisc-r13               SEQUENCE {
            discRxPoolList-r13              SL-PreconfigDiscRxPoolList-r13,
            discTxPoolList-r13              SL-PreconfigDiscTxPoolList-r13      OPTIONAL
        }                                                                       OPTIONAL,
        preconfigRelay-r13              SL-PreconfigRelay-r13               OPTIONAL
    ]]
```


DAINGEAN_0002349

```
}

SL-PreconfigGeneral-r12 ::=     SEQUENCE {
    -- PDCP configuration
    rohc-Profiles-r12                   SEQUENCE {
        profile0x0001-r12                       BOOLEAN,
        profile0x0002-r12                       BOOLEAN,
        profile0x0004-r12                       BOOLEAN,
        profile0x0006-r12                       BOOLEAN,
        profile0x0101-r12                       BOOLEAN,
        profile0x0102-r12                       BOOLEAN,
        profile0x0104-r12                       BOOLEAN
    },
    -- Physical configuration
    carrierFreq-r12                     ARFCN-ValueEUTRA-r9,
    maxTxPower-r12                      P-Max,
    additionalSpectrumEmission-r12      AdditionalSpectrumEmission,
    sl-bandwidth-r12                    ENUMERATED {n6, n15, n25, n50, n75, n100},
    tdd-ConfigSL-r12                    TDD-ConfigSL-r12,
    reserved-r12                        BIT STRING (SIZE (19)),
    ...
}

SL-PreconfigSync-r12 ::=    SEQUENCE {
    syncCP-Len-r12                      SL-CP-Len-r12,
    syncOffsetIndicator1-r12            SL-OffsetIndicatorSync-r12,
    syncOffsetIndicator2-r12            SL-OffsetIndicatorSync-r12,
    syncTxParameters-r12                P0-SL-r12,
    syncTxThreshOoC-r12                 RSRP-RangeSL3-r12,
    filterCoefficient-r12               FilterCoefficient,
    syncRefMinHyst-r12                  ENUMERATED {dB0, dB3, dB6, dB9, dB12},
    syncRefDiffHyst-r12                 ENUMERATED {dB0, dB3, dB6, dB9, dB12, dBinf},
    ...,
    [[  syncTxPeriodic-r13                  ENUMERATED {true}           OPTIONAL
    ]]
}

SL-PreconfigCommPoolList4-r12 ::=   SEQUENCE (SIZE (1..maxSL-TxPool-r12)) OF SL-PreconfigCommPool-
r12

SL-PreconfigCommRxPoolList-r13 ::=  SEQUENCE (SIZE (1..maxSL-CommRxPoolPreconf-v1310)) OF SL-
PreconfigCommPool-r12

SL-PreconfigCommTxPoolList-r13 ::=  SEQUENCE (SIZE (1..maxSL-CommTxPoolPreconf-v1310)) OF SL-
PreconfigCommPool-r12

SL-PreconfigCommPool-r12 ::=        SEQUENCE {
-- This IE is same as SL-CommResourcePool with rxParametersNCell absent
    sc-CP-Len-r12                       SL-CP-Len-r12,
    sc-Period-r12                       SL-PeriodComm-r12,
    sc-TF-ResourceConfig-r12            SL-TF-ResourceConfig-r12,
    sc-TxParameters-r12                 P0-SL-r12,
    data-CP-Len-r12                     SL-CP-Len-r12,
    data-TF-ResourceConfig-r12          SL-TF-ResourceConfig-r12,
    dataHoppingConfig-r12               SL-HoppingConfigComm-r12,
    dataTxParameters-r12                P0-SL-r12,
    trpt-Subset-r12                     SL-TRPT-Subset-r12,
    ...,
    [[  priorityList-r13                SL-PriorityList-r13         OPTIONAL    -- For Tx
    ]]
}

SL-PreconfigDiscRxPoolList-r13 ::=  SEQUENCE (SIZE (1..maxSL-DiscRxPoolPreconf-r13)) OF SL-
PreconfigDiscPool-r13

SL-PreconfigDiscTxPoolList-r13 ::=  SEQUENCE (SIZE (1..maxSL-DiscTxPoolPreconf-r13)) OF SL-
PreconfigDiscPool-r13

SL-PreconfigDiscPool-r13 ::=        SEQUENCE {
-- This IE is same as SL-DiscResourcePool with rxParameters absent
    cp-Len-r13                  SL-CP-Len-r12,
    discPeriod-r13              ENUMERATED {rf4, rf6, rf7, rf8, rf12, rf14, rf16, rf24, rf28,
                                    rf32, rf64, rf128, rf256, rf512, rf1024, spare},
    numRetx-r13                 INTEGER (0..3),
    numRepetition-r13               INTEGER (1..50),
    tf-ResourceConfig-r13           SL-TF-ResourceConfig-r12,
    txParameters-r13                SEQUENCE {
```


DAINGEAN_0002350

```
        txParametersGeneral-r13     P0-SL-r12,
        txProbability-r13           ENUMERATED {p25, p50, p75, p100}
    }                                                           OPTIONAL,
    ...
}

SL-PreconfigRelay-r13 ::=   SEQUENCE {
    reselectionInfoOoC-r13          ReselectionInfoRelay-r13
}

END

-- ASN1STOP
```

***SL-Preconfiguration* field descriptions**
carrierFreq Indicates the carrier frequency for out of coverage sidelink communication and sidelink discovery. In case of FDD it is uplink carrier frequency and the corresponding downlink frequency can be determined from the default TX-RX frequency separation defined in TS 36.101 [42, table 5.7.3-1].
commRxPoolList Indicates a list of reception pools for sidelink communication in addition to the resource pools indicated by *preconfigComm*.
commTxPoolList Indicates a list of transmission pools for sidelink communication in addition to the first resource pool within *preconfigComm*.
preconfigComm Indicates a list of resource pools. The first resource pool in the list is used for both reception and transmission of sidelink communication. The other resource pools, if present, are only used for reception of sidelink communication.
syncRefDiffHyst Hysteresis when evaluating a SyncRef UE using relative comparison. Value *dB0* corresponds to 0 dB, *dB3* to 3 dB and so on, value *dBinf* corresponds to infinite dB.
syncRefMinHyst Hysteresis when evaluating a SyncRef UE using absolute comparison. Value *dB0* corresponds to 0 dB, *dB3* to 3 dB and so on.

NOTE 1: The network may configure one or more of the reception only resource pools in *preconfigComm* to cover reception from in coverage UEs using scheduled resource allocation. For such a resource pool the network should set all bits of *subframeBitmap* to 1 and *offsetIndicator* to indicate the subframe immediately following the sidelink control information.

NOTE 2: The network should ensure that the resources defined by the first entry in *preconfigComm* (used for transmission by an out of coverage UE) do not overlap with those of the pool(s) covering scheduled transmissions by in coverage UEs. Furthermore, the network should ensure that for none of the entries in *preconfigComm* the resources defined by *sc-TF-ResourceConfig* overlap.

10 Radio information related interactions between network nodes

10.1 General

This section specifies RRC messages that are transferred between network nodes. These RRC messages may be transferred to or from the UE via another Radio Access Technology. Consequently, these messages have similar characteristics as the RRC messages that are transferred across the E-UTRA radio interface, i.e. the same transfer syntax and protocol extension mechanisms apply.

DAINGEAN_0002351

10.2 Inter-node RRC messages

10.2.1 General

This section specifies RRC messages that are sent either across the X2- or the S1-interface, either to or from the eNB, i.e. a single 'logical channel' is used for all RRC messages transferred across network nodes. The information could originate from or be destined for another RAT.

– *EUTRA-InterNodeDefinitions*

This ASN.1 segment is the start of the E-UTRA inter-node PDU definitions.

```
-- ASN1START

EUTRA-InterNodeDefinitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    AntennaInfoCommon,
    AntennaInfoDedicated-v10i0,
    ARFCN-ValueEUTRA,
    ARFCN-ValueEUTRA-v9e0,
    ARFCN-ValueEUTRA-r9,
    CellIdentity,
    C-RNTI,
    DL-DCCH-Message,
    DRB-Identity,
    DRB-ToReleaseList,
    FreqBandIndicator-r11,
    InDeviceCoexIndication-r11,
    MasterInformationBlock,
    maxBands,
    maxFreq,
    maxDRB,
    maxSCell-r10,
    maxSCell-r13,
    maxServCell-r10,
    maxServCell-r13,
    MBMSInterestIndication-r11,
    MeasConfig,
    MeasGapConfig,
    OtherConfig-r9,
    PhysCellId,
    P-Max,
    PowerCoordinationInfo-r12,
    SidelinkUEInformation-r12,
    SL-CommConfig-r12,
    SL-DiscConfig-r12,
    RadioResourceConfigDedicated,
    RCLWI-Configuration-r13,
    RSRP-Range,
    RSRQ-Range,
    RSRQ-Range-v1250,
    RS-SINR-Range-r13,
    SCellToAddModList-r10,
    SCellToAddModListExt-r13,
    SCG-ConfigPartSCG-r12,
    SecurityAlgorithmConfig,
    SCellIndex-r10,
    SCellIndex-r13,
    SCellToReleaseList-r10,
    SCellToReleaseListExt-r13,
    ServCellIndex-r10,
    ServCellIndex-r13,
    ShortMAC-I,
    MeasResultSSTD-r13,
    SystemInformationBlockType1,
    SystemInformationBlockType1-v890-IEs,
    SystemInformationBlockType2,
    UEAssistanceInformation-r11,
    UECapabilityInformation,
    UE-CapabilityRAT-ContainerList,
```


DAINGEAN_0002352

```
    UE-RadioPagingInfo-r12,
    WLANConnectionStatusReport-r13,
    WLAN-OffloadConfig-r12
FROM EUTRA-RRC-Definitions;

-- ASN1STOP
```

10.2.2 Message definitions

– *HandoverCommand*

This message is used to transfer the handover command generated by the target eNB.

Direction: target eNB to source eNB/ source RAN

***HandoverCommand* message**

```
-- ASN1START

HandoverCommand ::=                 SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            handoverCommand-r8                  HandoverCommand-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

HandoverCommand-r8-IEs ::=          SEQUENCE {
    handoverCommandMessage              OCTET STRING (CONTAINING DL-DCCH-Message),
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***HandoverCommand* field descriptions**
handoverCommandMessage
Contains the entire DL-DCCH-Message including the *RRCConnectionReconfiguration* message used to perform handover within E-UTRAN or handover to E-UTRAN, generated (entirely) by the target eNB.

NOTE: The source BSC, in case of inter-RAT handover from GERAN to E-UTRAN, expects that the HandoverCommand message includes DL-DCCH-Message only. Thus, criticalExtensionsFuture, spare1-spare7 and nonCriticalExtension should not be used regardless whether the source RAT is E-UTRAN, UTRAN or GERAN.

– *HandoverPreparationInformation*

This message is used to transfer the E-UTRA RRC information used by the target eNB during handover preparation, including UE capability information.

Direction: source eNB/ source RAN to target eNB

***HandoverPreparationInformation* message**

```
-- ASN1START

HandoverPreparationInformation ::=  SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            handoverPreparationInformation-r8   HandoverPreparationInformation-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
```


DAINGEAN_0002353

```
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

HandoverPreparationInformation-r8-IEs ::= SEQUENCE {
    ue-RadioAccessCapabilityInfo        UE-CapabilityRAT-ContainerList,
    as-Config                           AS-Config                   OPTIONAL,       -- Cond HO
    rrm-Config                          RRM-Config                  OPTIONAL,
    as-Context                          AS-Context              OPTIONAL,       -- Cond HO
    nonCriticalExtension                HandoverPreparationInformation-v920-IEs     OPTIONAL
}

HandoverPreparationInformation-v920-IEs ::= SEQUENCE {
    ue-ConfigRelease-r9                 ENUMERATED {
                                        rel9, rel10, rel11, rel12, v10j0, v11e0,
                                        v1280, rel13, ...}          OPTIONAL,   -- Cond HO2
    nonCriticalExtension                HandoverPreparationInformation-v9d0-IEs     OPTIONAL
}

HandoverPreparationInformation-v9d0-IEs ::= SEQUENCE {
    lateNonCriticalExtension            OCTET STRING (CONTAINING HandoverPreparationInformation-
v9j0-IEs)   OPTIONAL,
    nonCriticalExtension                HandoverPreparationInformation-v9e0-IEs         OPTIONAL
}

-- Late non-critical extensions:
HandoverPreparationInformation-v9j0-IEs ::= SEQUENCE {
    -- Following field is only for pre REL-10 late non-critical extensions
    lateNonCriticalExtension            OCTET STRING                    OPTIONAL,
    nonCriticalExtension                HandoverPreparationInformation-v10j0-IEs        OPTIONAL
}

HandoverPreparationInformation-v10j0-IEs ::= SEQUENCE {
    as-Config-v10j0                     AS-Config-v10j0         OPTIONAL,
    -- Following field is only for late non-critical extensions from REL-10
    nonCriticalExtension                SEQUENCE {}             OPTIONAL
}

-- Regular non-critical extensions:
HandoverPreparationInformation-v9e0-IEs ::= SEQUENCE {
    as-Config-v9e0                      AS-Config-v9e0                  OPTIONAL,   -- Cond HO2
    nonCriticalExtension                HandoverPreparationInformation-v1130-IEs        OPTIONAL
}

HandoverPreparationInformation-v1130-IEs    ::= SEQUENCE {
    as-Context-v1130                    AS-Context-v1130                OPTIONAL,   -- Cond HO2
    nonCriticalExtension                HandoverPreparationInformation-v1250-IEs
    OPTIONAL
}

HandoverPreparationInformation-v1250-IEs ::= SEQUENCE {
    ue-SupportedEARFCN-r12              ARFCN-ValueEUTRA-r9             OPTIONAL,   -- Cond HO3
    as-Config-v1250                AS-Config-v1250             OPTIONAL,   -- Cond HO2
    nonCriticalExtension                HandoverPreparationInformation-v1320-IEs
    OPTIONAL
}

HandoverPreparationInformation-v1320-IEs ::= SEQUENCE {
    as-Config-v1320                     AS-Config-v1320                 OPTIONAL,   -- Cond HO2
    as-Context-v1320                    AS-Context-v1320                OPTIONAL,   -- Cond HO2
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```


DAINGEAN_0002354

HandoverPreparationInformation field descriptions
as-Config The radio resource configuration. Applicable in case of intra-E-UTRA handover. If the target receives an incomplete *MeasConfig* and *RadioResourceConfigDedicated* in the *as-Config*, the target eNB may decide to apply the full configuration option based on the *ue-ConfigRelease*.
as-Context Local E-UTRAN context required by the target eNB.
rrm-Config Local E-UTRAN context used depending on the target node's implementation, which is mainly used for the RRM purpose.
ue-ConfigRelease Indicates the RRC protocol release or version applicable for the current UE configuration. This could be used by target eNB to decide if the full configuration approach should be used. If this field is not present, the target assumes that the current UE configuration is based on the release 8 version of RRC protocol. NOTE 1.
ue-RadioAccessCapabilityInfo NOTE 2
ue-SupportedEARFCN Includes UE supported EARFCN of the handover target E-UTRA cell if the target E-UTRA cell belongs to multiple frequency bands.

NOTE 1: The source typically sets the *ue-ConfigRelease* to the release corresponding with the current dedicated radio configuration. The source may however also consider the common radio resource configuration e.g. in case interoperability problems would appear if the UE temporary continues extensions of this part of the configuration in a target PCell not supporting them.

NOTE 2: The following table indicates per source RAT whether RAT capabilities are included or not.

Source RAT	E-UTRA capabilites	UTRA capabilities	GERAN capabilities
UTRAN	Included	May be included, ignored by eNB if received	May be included
GERAN CS	Excluded	May be included, ignored by eNB if received	Included
GERAN PS	Excluded	May be included, ignored by eNB if received	Included
E-UTRAN	Included	May be included	May be included

Conditional presence	Explanation
HO	The field is mandatory present in case of handover within E-UTRA; otherwise the field is not present.
HO2	The field is optional present in case of handover within E-UTRA; otherwise the field is not present.
HO3	The field is optional present in case of handover from GERAN to E-UTRA, otherwise the field is not present.

– *SCG-Config*

This message is used to transfer the SCG radio configuration generated by the SeNB.

Direction: Secondary eNB to master eNB

***SCG-Config* message**

```
-- ASN1START

SCG-Config-r12 ::=                  SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            scg-Config-r12                      SCG-Config-r12-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
```


DAINGEAN_0002355

```
}

SCG-Config-r12-IEs ::=              SEQUENCE {
    scg-RadioConfig-r12                 SCG-ConfigPartSCG-r12               OPTIONAL,
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

SCG-Config field descriptions

scg-RadioConfig-r12
Includes the change of the dedicated SCG configuration and, upon addition of an SCG cell, the common SCG configuration.
The SeNB only includes a new SCG cell in response to a request from MeNB, but may include release of an SCG cell release or release of the SCG part of an SCG/Split DRB without prior request from MeNB. The SeNB does not use this field to initiate release of the SCG.

– *SCG-ConfigInfo*

This message is used by MeNB to request the SeNB to perform certain actions e.g. to establish, modify or release an SCG, and it may include additional information e.g. to assist the SeNB with assigning the SCG configuration.

Direction: Master eNB to secondary eNB

SCG-ConfigInfo message

```
-- ASN1START

SCG-ConfigInfo-r12 ::=                  SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            scg-ConfigInfo-r12                  SCG-ConfigInfo-r12-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

SCG-ConfigInfo-r12-IEs ::=          SEQUENCE {
    radioResourceConfigDedMCG-r12   RadioResourceConfigDedicated        OPTIONAL,
    sCellToAddModListMCG-r12        SCellToAddModList-r10               OPTIONAL,
    measGapConfig-r12               MeasGapConfig                       OPTIONAL,
    powerCoordinationInfo-r12       PowerCoordinationInfo-r12           OPTIONAL,
    scg-RadioConfig-r12             SCG-ConfigPartSCG-r12               OPTIONAL,
    eutra-CapabilityInfo-r12        OCTET STRING (CONTAINING UECapabilityInformation)   OPTIONAL,
    scg-ConfigRestrictInfo-r12      SCG-ConfigRestrictInfo-r12          OPTIONAL,
    mbmsInterestIndication-r12      OCTET STRING (CONTAINING
                                        MBMSInterestIndication-r11)     OPTIONAL,
    measResultServCellListSCG-r12   MeasResultServCellListSCG-r12       OPTIONAL,
    drb-ToAddModListSCG-r12         DRB-InfoListSCG-r12                 OPTIONAL,
    drb-ToReleaseListSCG-r12        DRB-ToReleaseList                   OPTIONAL,
    sCellToAddModListSCG-r12        SCellToAddModListSCG-r12            OPTIONAL,
    sCellToReleaseListSCG-r12       SCellToReleaseList-r10              OPTIONAL,
    p-Max-r12                           P-Max                               OPTIONAL,
    nonCriticalExtension            SCG-ConfigInfo-v1310-IEs            OPTIONAL
}

SCG-ConfigInfo-v1310-IEs ::=        SEQUENCE {
    measResultSSTD-r13              MeasResultSSTD-r13                  OPTIONAL,
    sCellToAddModListMCG-Ext-r13        SCellToAddModListExt-r13            OPTIONAL,
    measResultServCellListSCG-Ext-r13   MeasResultServCellListSCG-Ext-r13   OPTIONAL,
    sCellToAddModListSCG-Ext-r13        SCellToAddModListSCG-Ext-r13            OPTIONAL,
    sCellToReleaseListSCG-Ext-r13   SCellToReleaseListExt-r13           OPTIONAL,
    nonCriticalExtension            SEQUENCE {}                         OPTIONAL
}

DRB-InfoListSCG-r12 ::=             SEQUENCE (SIZE (1..maxDRB)) OF DRB-InfoSCG-r12

DRB-InfoSCG-r12 ::=             SEQUENCE {
    eps-BearerIdentity-r12          INTEGER (0..15)             OPTIONAL,   -- Cond DRB-Setup
```


DAINGEAN_0002356

```
    drb-Identity-r12                DRB-Identity,
    drb-Type-r12                    ENUMERATED {split, scg}     OPTIONAL,   -- Cond DRB-Setup
    ...
}

SCellToAddModListSCG-r12 ::=    SEQUENCE (SIZE (1..maxSCell-r10)) OF Cell-ToAddMod-r12

SCellToAddModListSCG-Ext-r13 ::=    SEQUENCE (SIZE (1..maxSCell-r13)) OF Cell-ToAddMod-r12

Cell-ToAddMod-r12 ::=               SEQUENCE {
    sCellIndex-r12                      SCellIndex-r10,
    cellIdentification-r12              SEQUENCE {
        physCellId-r12                      PhysCellId,
        dl-CarrierFreq-r12                  ARFCN-ValueEUTRA-r9
    }                                                               OPTIONAL,   -- Cond SCellAdd
    measResultCellToAdd-r12             SEQUENCE {
        rsrpResult-r12                      RSRP-Range,
        rsrqResult-r12                      RSRQ-Range
    }                                                               OPTIONAL,   -- Cond SCellAdd2
    ...,
    [[      sCellIndex-r13                  SCellIndex-r13              OPTIONAL,
        measResultCellToAdd-v1310           SEQUENCE {
            rs-sinr-Result-r13                  RS-SINR-Range-r13
        }                                                           OPTIONAL    -- Cond SCellAdd2
    ]]
}

MeasResultServCellListSCG-r12 ::=   SEQUENCE (SIZE (1..maxServCell-r10)) OF MeasResultServCellSCG-
r12

MeasResultServCellListSCG-Ext-r13 ::=   SEQUENCE (SIZE (1..maxServCell-r13)) OF
MeasResultServCellSCG-r12

MeasResultServCellSCG-r12 ::=           SEQUENCE {
    servCellId-r12                      ServCellIndex-r10,
    measResultSCell-r12                 SEQUENCE {
        rsrpResultSCell-r12                 RSRP-Range,
        rsrqResultSCell-r12                 RSRQ-Range
    },
    ...,
    [[      servCellId-r13                      ServCellIndex-r13       OPTIONAL,
        measResultSCell-v1310               SEQUENCE {
            rs-sinr-ResultSCell-r13             RS-SINR-Range-r13
        }                                                           OPTIONAL
    ]]
}

SCG-ConfigRestrictInfo-r12 ::=      SEQUENCE {
    maxSCH-TB-BitsDL-r12                INTEGER (1..100),
    maxSCH-TB-BitsUL-r12                INTEGER (1..100)
}

-- ASN1STOP
```


DAINGEAN_0002357

SCG-ConfigInfo field descriptions
drb-ToAddModListSCG Includes DRBs the SeNB is requested to establish or modify (DRB type change).
drb-ToReleaseListSCG Includes DRBs the SeNB is requested to release.
maxSCH-TB-BitsXL Indicates the maximum DL-SCH/UL-SCH TB bits that may be scheduled in a TTI. Specified as a percentage of the value defined for the applicable UE category.
measGapConfig Includes the current measurement gap configuration.
measResultSSTD Includes measurement results of UE SFN and Subframe Timing Difference between the PCell and the PSCell.
measResultServCellListSCG Includes measurement results of SCG (serving) cells.
radioResourceConfigDedMCG Includes the current dedicated MCG radio resource configuration.
sCellIndex If sCellIndex-r13 is present, sCellIndex-r12 shall be ignored.
sCellToAddModListMCG, sCellToAddModListMCG-Ext Includes the current MCG SCell configuration. Field *sCellToAddModListMCG* is used to add the first 4 SCells with *sCellIndex-r10* while *sCellToAddModListMCG-Ext* is used to add the rest.
sCellToAddModListSCG, sCellToAddModListSCG-Ext Includes SCG cells the SeNB is requested to establish. Measurement results may be provided for these cells. Field *sCellToAddModListSCG* is used to add the first 4 SCells with *sCellIndex-r12* while *sCellToAddModListSCG-Ext* is used to add the rest.
sCellToReleaseListSCG, sCellToReleaseListSCG-Ext Includes SCG cells the SeNB is requested to release.
scg-RadioConfig Includes the current dedicated SCG configuration.
scg-ConfigRestrictInfo Includes fields for which MeNB explictly indicates the restriction to be observed by SeNB.
servCellId If servCellId-r13 is present, servCellId-r12 shall be ignored.
p-Max Cell specific value i.e. as broadcast by PCell.

Conditional presence	Explanation
DRB-Setup	The field is mandatory present in case DRB establishment is requested; otherwise the field is not present.
SCellAdd	The field is mandatory present in case SCG cell establishment is requested; otherwise the field is not present.
SCellAdd2	The field is optional present in case SCG cell establishment is requested; otherwise the field is not present.

– *UEPagingCoverageInformation*

This message is used to transfer UE paging coverage information, covering both upload to and download from the EPC.

Direction: eNB to/from EPC

***UEPagingCoverageInformation* message**

```
-- ASN1START

UEPagingCoverageInformation ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            uePagingCoverageInformation-r13         UEPagingCoverageInformation-r13-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
```


DAINGEAN_0002358

```
}

UEPagingCoverageInformation-r13-IEs ::= SEQUENCE {
    mpdcch-NumRepetition-r13                INTEGER (1..256)    OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}         OPTIONAL
}

-- ASN1STOP
```

***UEPagingCoverageInformation* field descriptions**
mpdcch-NumRepetition
Number of repetitions for MPDCCH, see TS 36.211 [21].

– *UERadioAccessCapabilityInformation*

This message is used to transfer UE radio access capability information, covering both upload to and download from the EPC.

Direction: eNB to/ from EPC

UERadioAccessCapabilityInformation message

```
-- ASN1START

UERadioAccessCapabilityInformation ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            ueRadioAccessCapabilityInformation-r8
                                                UERadioAccessCapabilityInformation-r8-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UERadioAccessCapabilityInformation-r8-IEs ::= SEQUENCE {
    ue-RadioAccessCapabilityInfo        OCTET STRING (CONTAINING UECapabilityInformation),
    nonCriticalExtension                SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

***UERadioAccessCapabilityInformation* field descriptions**
ue-RadioAccessCapabilityInfo
Including E-UTRA, GERAN, and CDMA2000-1xRTT Bandclass radio access capabilities (separated). UTRA radio access capabilities are not included.

– *UERadioPagingInformation*

This message is used to transfer radio paging information, covering both upload to and download from the EPC.

Direction: eNB to/ from EPC

UERadioPagingInformation message

```
-- ASN1START

UERadioPagingInformation ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            ueRadioPagingInformation-r12            UERadioPagingInformation-r12-IEs,
            spare7 NULL,
            spare6 NULL, spare5 NULL, spare4 NULL,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
```


DAINGEAN_0002359

```
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UERadioPagingInformation-r12-IEs ::= SEQUENCE {
    ue-RadioPagingInfo-r12              OCTET STRING (CONTAINING UE-RadioPagingInfo-r12),
    nonCriticalExtension                UERadioPagingInformation-v1310-IEs          OPTIONAL
}

UERadioPagingInformation-v1310-IEs ::= SEQUENCE {
    supportedBandListEUTRAForPaging-r13     SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicator-r11
OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                             OPTIONAL

}

-- ASN1STOP
```

***UERadioPagingInformation* field descriptions**
ue-RadioPagingInfo
The field is used to transfer UE capability information used for paging. The eNB generates the *ue-RadioPagingInfo* and the contained UE capability information is absent when not supported by the UE.
supportedBandListEUTRAForPaging
Indicates the UE supported frequency bands which is derived by the eNB from *UE-EUTRA-Capability*.

10.3 Inter-node RRC information element definitions

– *AS-Config*

The *AS-Config* IE contains information about RRC configuration information in the source eNB which can be utilized by target eNB to determine the need to change the RRC configuration during the handover preparation phase. The information can also be used after the handover is successfully performed or during the RRC connection re-establishment.

***AS-Config* information element**

```
-- ASN1START

AS-Config ::=               SEQUENCE {
    sourceMeasConfig                    MeasConfig,
    sourceRadioResourceConfig           RadioResourceConfigDedicated,
    sourceSecurityAlgorithmConfig       SecurityAlgorithmConfig,
    sourceUE-Identity                   C-RNTI,
    sourceMasterInformationBlock        MasterInformationBlock,
    sourceSystemInformationBlockType1   SystemInformationBlockType1(WITH COMPONENTS
                                            {..., nonCriticalExtension ABSENT}),
    sourceSystemInformationBlockType2   SystemInformationBlockType2,
    antennaInfoCommon                   AntennaInfoCommon,
    sourceDl-CarrierFreq                ARFCN-ValueEUTRA,
    ...,
    [[  sourceSystemInformationBlockType1Ext    OCTET STRING (CONTAINING
                                                SystemInformationBlockType1-v890-IEs)   OPTIONAL,
        sourceOtherConfig-r9                OtherConfig-r9
    -- sourceOtherConfig-r9 should have been optional. A target eNB compliant with this transfer
    -- syntax should support receiving an AS-Config not including this extension addition group
    -- e.g. from a legacy source eNB
    ]],
    [[  sourceSCellConfigList-r10           SCellToAddModList-r10           OPTIONAL
    ]],
    [[  sourceConfigSCG-r12                 SCG-Config-r12      OPTIONAL
    ]]
}

AS-Config-v9e0 ::=              SEQUENCE {
    sourceDl-CarrierFreq-v9e0       ARFCN-ValueEUTRA-v9e0
}

AS-Config-v10j0 ::=             SEQUENCE {
    antennaInfoDedicatedPCell-v10i0     AntennaInfoDedicated-v10i0          OPTIONAL
}
```


DAINGEAN_0002360

```
AS-Config-v1250 ::=             SEQUENCE {
    sourceWlan-OffloadConfig-r12        WLAN-OffloadConfig-r12          OPTIONAL,
    sourceSL-CommConfig-r12             SL-CommConfig-r12               OPTIONAL,
    sourceSL-DiscConfig-r12             SL-DiscConfig-r12               OPTIONAL
}

AS-Config-v1320 ::=             SEQUENCE {
    sourceSCellConfigList-r13           SCellToAddModListExt-r13        OPTIONAL,
    sourceRCLWI-Configuration-r13       RCLWI-Configuration-r13         OPTIONAL
}

-- ASN1STOP
```

NOTE: The *AS-Config* re-uses information elements primarily created to cover the radio interface signalling requirements. Consequently, the information elements may include some parameters that are not relevant for the target eNB e.g. the SFN as included in the *MasterInformationBlock*.

***AS-Config* field descriptions**
antennaInfoCommon This field provides information about the number of antenna ports in the source PCell.
sourceDL-CarrierFreq Provides the parameter Downlink EARFCN in the source PCell, see TS 36.101 [42]. If the source eNB provides *AS-Config-v9e0*, it sets *sourceDl-CarrierFreq* (i.e. without suffix) to *maxEARFCN*.
sourceOtherConfig Provides other configuration in the source PCell.
sourceMasterInformationBlock *MasterInformationBlock* transmitted in the source PCell.
sourceMeasConfig Measurement configuration in the source cell. The measurement configuration for all measurements existing in the source eNB when handover is triggered shall be included. See 10.5.
sourceRCLWI-Configuration RCLWI Configuration in the source PCell.
sourceSL-CommConfig This field covers the sidelink communication configuration.
sourceSL-DiscConfig This field covers the sidelink discovery configuration.
sourceRadioResourceConfig Radio configuration in the source PCell. The radio resource configuration for all radio bearers existing in the source PCell when handover is triggered shall be included. See 10.5.
sourceSCellConfigList Radio resource configuration (common and dedicated) of the SCells configured in the source eNB.
sourceSecurityAlgorithmConfig This field provides the AS integrity protection (SRBs) and AS ciphering (SRBs and DRBs) algorithm configuration used in the source PCell.
sourceSystemInformationBlockType1 *SystemInformationBlockType1* transmitted in the source PCell.
sourceSystemInformationBlockType2 *SystemInformationBlockType2* transmitted in the source PCell.

– *AS-Context*

The IE *AS-Context* is used to transfer local E-UTRAN context required by the target eNB.

***AS-Context* information element**

```
-- ASN1START

AS-Context ::=                      SEQUENCE {
    reestablishmentInfo                 ReestablishmentInfo         OPTIONAL    -- Cond HO
}

AS-Context-v1130 ::=                SEQUENCE {
    idc-Indication-r11                  OCTET STRING (CONTAINING
                                        InDeviceCoexIndication-r11) OPTIONAL,   -- Cond HO2
```


DAINGEAN_0002361

```
    mbmsInterestIndication-r11              OCTET STRING (CONTAINING
                                            MBMSInterestIndication-r11) OPTIONAL,   -- Cond HO2
    powerPrefIndication-r11                 OCTET STRING (CONTAINING
                                            UEAssistanceInformation-r11)    OPTIONAL,   -- Cond HO2
    ...,
    [[  sidelinkUEInformation-r12               OCTET STRING (CONTAINING
                                                SidelinkUEInformation-r12)  OPTIONAL    -- Cond HO2
    ]]
}

AS-Context-v1320 ::=                    SEQUENCE {
    wlanConnectionStatusReport-r13          OCTET STRING (CONTAINING
                                            WLANConnectionStatusReport-r13) OPTIONAL    -- Cond HO2
}

-- ASN1STOP
```

***AS-Context* field descriptions**
idc-Indication
Including information used for handling the IDC problems.
reestablishmentInfo
Including information needed for the RRC connection re-establishment.

Conditional presence	Explanation
HO	The field is mandatory present in case of handover within E-UTRA; otherwise the field is not present.
HO2	The field is optional present in case of handover within E-UTRA; otherwise the field is not present.

– *ReestablishmentInfo*

The *ReestablishmentInfo* IE contains information needed for the RRC connection re-establishment.

ReestablishmentInfo information element

```
-- ASN1START

ReestablishmentInfo ::=             SEQUENCE {
    sourcePhysCellId                    PhysCellId,
    targetCellShortMAC-I                ShortMAC-I,
    additionalReestabInfoList           AdditionalReestabInfoList               OPTIONAL,
    ...
}

AdditionalReestabInfoList ::=       SEQUENCE ( SIZE (1..maxReestabInfo) ) OF AdditionalReestabInfo

AdditionalReestabInfo ::=   SEQUENCE{
    cellIdentity                        CellIdentity,
    key-eNodeB-Star                     Key-eNodeB-Star,
    shortMAC-I                          ShortMAC-I
}

Key-eNodeB-Star ::=                 BIT STRING (SIZE (256))

-- ASN1STOP
```


DAINGEAN_0002362

ReestablishmentInfo field descriptions
additionalReestabInfoList
Contains a list of shortMAC-I and KeNB* for cells under control of the target eNB, required for potential re-establishment by the UE in these cells to succeed.
Key-eNodeB-Star
Parameter KeNB*: See TS 33.401 [32, 7.2.8.4]. If the cell identified by *cellIdentity* belongs to multiple frequency bands, the source eNB selects the DL-EARFCN for the KeNB* calculation using the same logic as UE uses when selecting the DL-EARFCN in IDLE as defined in section 6.2.2. This parameter is only used for X2 handover, and for S1 handover, it shall be ignored by target eNB.
sourcePhyCellId
The physical cell identity of the source PCell, used to determine the UE context in the target eNB at re-establishment.
targetCellShortMAC-I
The ShortMAC-I for the handover target PCell, in order for potential re-establishment to succeed.

– *RRM-Config*

The *RRM-Config* IE contains information about UE specific RRM information before the handover which can be utilized by target eNB.

RRM-Config information element

```
-- ASN1START

RRM-Config ::=                SEQUENCE {
    ue-InactiveTime               ENUMERATED {
                                      s1, s2, s3, s5, s7, s10, s15, s20,
                                      s25, s30, s40, s50, min1, min1s20c, min1s40,
                                      min2, min2s30, min3, min3s30, min4, min5, min6,
                                      min7, min8, min9, min10, min12, min14, min17, min20,
                                      min24, min28, min33, min38, min44, min50, hr1,
                                      hr1min30, hr2, hr2min30, hr3, hr3min30, hr4, hr5, hr6,
                                      hr8, hr10, hr13, hr16, hr20, day1, day1hr12, day2,
                                      day2hr12, day3, day4, day5, day7, day10, day14, day19,
                                      day24, day30, dayMoreThan30}        OPTIONAL,
    ...,
    [[  candidateCellInfoList-r10   CandidateCellInfoList-r10       OPTIONAL
    ]]
}

CandidateCellInfoList-r10 ::=   SEQUENCE (SIZE (1..maxFreq)) OF CandidateCellInfo-r10

CandidateCellInfo-r10 ::=       SEQUENCE {
    -- cellIdentification
    physCellId-r10                  PhysCellId,
    dl-CarrierFreq-r10              ARFCN-ValueEUTRA,
    -- available measurement results
    rsrpResult-r10                  RSRP-Range          OPTIONAL,
    rsrqResult-r10                  RSRQ-Range          OPTIONAL,
    ...,
    [[  dl-CarrierFreq-v1090            ARFCN-ValueEUTRA-v9e0       OPTIONAL
    ]],
    [[  rsrqResult-v1250                RSRQ-Range-v1250            OPTIONAL
    ]],
    [[  rs-sinr-Result-r13              RS-SINR-Range-r13           OPTIONAL
    ]]
}

-- ASN1STOP
```


DAINGEAN_0002363

RRM-Config field descriptions
candidateCellInfoList
A list of the best cells on each frequency for which measurement information was available, in order of decreasing RSRP.
dl-CarrierFreq
The source includes *dl-CarrierFreq-v1090* if and only if *dl-CarrierFreq-r10* is set to *maxEARFCN*.
ue-InactiveTime
Duration while UE has not received or transmitted any user data. Thus the timer is still running in case e.g., UE measures the neighbour cells for the HO purpose. Value s1 corresponds to 1 second, s2 corresponds to 2 seconds and so on. Value min1 corresponds to 1 minute, value min1s20 corresponds to 1 minute and 20 seconds, value min1s40 corresponds to 1 minute and 40 seconds and so on. Value hr1 corresponds to 1 hour, hr1min30 corresponds to 1 hour and 30 minutes and so on.

10.4 Inter-node RRC multiplicity and type constraint values

– Multiplicity and type constraints definitions

```
-- ASN1START

maxReestabInfo              INTEGER ::= 32  -- Maximum number of KeNB* and shortMAC-I forwarded
                                            -- at handover for re-establishment preparation

-- ASN1STOP
```

– End of *EUTRA-InterNodeDefinitions*

```
-- ASN1START

END

-- ASN1STOP
```

10.5 Mandatory information in *AS-Config*

The *AS-Config* transferred between source eNB and target-eNB shall include all IEs necessary to describe the AS context. The conditional presence in section 6 is only applicable for eNB to UE communication.

The "need" or "cond" statements are not applied in case of sending the IEs from source eNB to target eNB. Some fields shall be included regardless of the "need" or "cond" e.g. *discardTimer*. The *AS-Config* re-uses information elements primarily created to cover the radio interface signalling requirements. The information elements may include some parameters that are not relevant for the target eNB e.g. the SFN as included in the *MasterInformationBlock*.

All the fields in the *AS-Config* as defined in 10.3 that are introduced after v9.2.0 and that are optional for eNB to UE communication shall be included, if the functionality is configured. The fields in the *AS-Config* that are defined before and including v9.2.0 shall be included as specified in the following.

Within the *sourceRadioResourceConfig*, *sourceMeasConfig* and *sourceOtherConfig*, the source eNB shall include fields that are optional for eNB to UE communication, if the functionality is configured unless explicitly specified otherwise in the following:

- in accordance with a condition that is explicitly stated to be applicable; or
- a default value is defined for the concerned field; and the configured value is the same as the default value that is defined; or
- the need of the field is OP and the current UE configuration corresponds with the behaviour defined for absence of the field;

The following fields, if the functionality is configured, are not mandatory for the source eNB to include in the *AS-Config* since delta signalling by the target eNB for these fields is not supported:

DAINGEAN_0002364

- *semiPersistSchedC-RNTI*
- *measGapConfig*

For the measurement configuration, a corresponding operation as 5.5.6.1 and 5.5.2.2a is executed by target eNB.

10.6 Inter-node NB-IoT messages

10.6.1 General

This section specifies NB-IoT RRC messages that are sent either across the X2- or the S1-interface, either to or from the eNB, i.e. a single 'logical channel' is used for all NB-IoT RRC messages transferred across network nodes.

– *NB-IoT-InterNodeDefinitions*

This ASN.1 segment is the start of the NB-IoT inter-node PDU definitions.

```
-- ASN1START

NBIOT-InterNodeDefinitions DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    C-RNTI,
    PhysCellId,
    SecurityAlgorithmConfig,
    ShortMAC-I
FROM EUTRA-RRC-Definitions

    AdditionalReestabInfoList
FROM EUTRA-InterNodeDefinitions

    CarrierFreq-NB-r13,
    RadioResourceConfigDedicated-NB-r13,
    UE-Capability-NB-r13,
    UE-RadioPagingInfo-NB-r13
FROM NBIOT-RRC-Definitions;

-- ASN1STOP
```

10.6.2 Message definitions

– *HandoverPreparationInformation-NB*

This message is used to transfer the UE context from the eNB where the RRC connection has been suspended and transfer it to the eNB where the RRC Connection has been requested to be resumed.

Direction: source eNB to target eNB

***HandoverPreparationInformation-NB* message**

```
-- ASN1START

HandoverPreparationInformation-NB ::=   SEQUENCE {
    criticalExtensions                      CHOICE {
        c1                                      CHOICE{
            handoverPreparationInformation-r13      HandoverPreparationInformation-NB-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}
```


DAINGEAN_0002365

```
HandoverPreparationInformation-NB-IEs ::= SEQUENCE {
    ue-RadioAccessCapabilityInfo-r13        UE-Capability-NB-r13,
    as-Config-r13                           AS-Config-NB,
    rrm-Config-r13                          RRM-Config-NB                   OPTIONAL,
    as-Context-r13                          AS-Context-NB                   OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

***HandoverPreparationInformation-NB* field descriptions**
as-Config   The radio resource configuration.
as-Context   The local E-UTRAN context required by the target eNB.
rrm-Config   The local E-UTRAN context used depending on the target node's implementation, which is mainly used for the RRM purpose.
ue-RadioAccessCapabilityInfo   The NB-IoT UE Radio Access Capability Parameters, see TS 36.306 [5].

– *UEPagingCoverageInformation-NB*

This message is used to transfer UE paging coverage information for NB-IoT, covering both upload to and download from the EPC.

Direction: eNB to/from EPC

***UEPagingCoverageInformation-NB* message**

```
-- ASN1START

UEPagingCoverageInformation-NB ::= SEQUENCE {
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            uePagingCoverageInformation-r13         UEPagingCoverageInformation-NB-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

UEPagingCoverageInformation-NB-IEs ::= SEQUENCE {
--  the possible value(s) can differ from those sent on Uu
    npdcch-NumRepetitionPaging-r13          INTEGER (1..2048)   OPTIONAL,
    nonCriticalExtension                    SEQUENCE {}         OPTIONAL
}

-- ASN1STOP
```

***UEPagingCoverageInformation-NB* field descriptions**
npdcch-NumRepetitionPaging   Number of repetitions for NPDCCH, see TS 36.211 [21].This value is an estimate of the required number of repetitions for NPDCCH.

– *UERadioAccessCapabilityInformation-NB*

This message is used to transfer UE NB-IoT Radio Access capability information, covering both upload to and download from the EPC.

Direction: eNB to/ from EPC

***UERadioAccessCapabilityInformation-NB* message**

```
-- ASN1START
```


DAINGEAN_0002366

```
UERadioAccessCapabilityInformation-NB ::= SEQUENCE {
    criticalExtensions                    CHOICE {
        c1                                    CHOICE{
            ueRadioAccessCapabilityInformation-r13
                                                  UERadioAccessCapabilityInformation-NB-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture              SEQUENCE {}
    }
}

UERadioAccessCapabilityInformation-NB-IEs ::= SEQUENCE {
    ue-RadioAccessCapabilityInfo-r13          OCTET STRING (CONTAINING UE-Capability-NB-r13),
    nonCriticalExtension                      SEQUENCE {}                              OPTIONAL
}

-- ASN1STOP
```

***UERadioAccessCapabilityInformation-NB* field descriptions**
ue-RadioAccessCapabilityInfo The NB-IoT UE Radio Access Capability Parameters, see TS 36.306 [5].

– *UERadioPagingInformation-NB*

This message is used to transfer NB-IoT radio paging information, covering both upload to and download from the EPC.

Direction: eNB to/ from EPC

***UERadioPagingInformation-NB* message**

```
-- ASN1START

UERadioPagingInformation-NB ::= SEQUENCE {
    criticalExtensions                CHOICE {
        c1                                CHOICE{
            ueRadioPagingInformation-r13          UERadioPagingInformation-NB-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture          SEQUENCE {}
    }
}

UERadioPagingInformation-NB-IEs ::= SEQUENCE {
    ue-RadioPagingInfo-r13            OCTET STRING (CONTAINING UE-RadioPagingInfo-NB-r13),
    nonCriticalExtension              SEQUENCE {}                              OPTIONAL
}

-- ASN1STOP
```

***UERadioPagingInformation-NB* field descriptions**
ue-RadioPagingInfo The field is used to transfer UE NB-IoT capability information used for paging. The eNB generates the *ue-RadioPagingInfo* and the contained UE capability information is absent when not supported bythe UE.

10.7 Inter-node NB-IoT RRC information element definitions

– *AS-Config-NB*

The *AS-Config-NB* IE contains information about NB-IoT RRC configuration information in the source eNB which can be utilized by target eNB.

DAINGEAN_0002367

AS-Config-NB information element

```
-- ASN1START

AS-Config-NB ::=                    SEQUENCE {
    sourceRadioResourceConfig-r13           RadioResourceConfigDedicated-NB-r13,
    sourceSecurityAlgorithmConfig-r13       SecurityAlgorithmConfig,
    sourceUE-Identity-r13                   C-RNTI,
    sourceDl-CarrierFreq-r13                CarrierFreq-NB-r13,
    ...
}

-- ASN1STOP
```

AS-Config-NB field descriptions
sourceDL-CarrierFreq
Provides the parameter Downlink EARFCN in the source PCell, see TS 36.101 [42].
sourceRadioResourceConfig
Radio configuration in the source PCell. The radio resource configuration for all radio bearers existing in the source PCell shall be included. See 10.9.
sourceSecurityAlgorithmConfig
This field provides the AS integrity protection (SRBs) and AS ciphering (SRBs and DRBs) algorithm configuration used in the source PCell.

– *AS-Context-NB*

The IE *AS-Context-NB* is used to transfer the UE context required by the target eNB.

AS-Context-NB information element

```
-- ASN1START

AS-Context-NB ::=                   SEQUENCE {
    reestablishmentInfo-r13             ReestablishmentInfo-NB          OPTIONAL,
    ...
}

-- ASN1STOP
```

AS-Context-NB field descriptions
reestablishmentInfo
Including information needed for the RRC connection re-establishment.

– *ReestablishmentInfo-NB*

The *ReestablishmentInfo-NB* IE contains information needed for the RRC connection re-establishment.

ReestablishmentInfo-NB information element

```
-- ASN1START

ReestablishmentInfo-NB ::=          SEQUENCE {
    sourcePhysCellId-r13                    PhysCellId,
    targetCellShortMAC-I-r13                ShortMAC-I,
    additionalReestabInfoList-r13           AdditionalReestabInfoList               OPTIONAL,
    ...
}


-- ASN1STOP
```


DAINGEAN_0002368

ReestablishmentInfo-NB field descriptions
additionalReestabInfoList
Contains a list of shortMAC-I and KeNB* for cells under control of the target eNB, required for potential re-establishment by the UE in these cells to succeed.
sourcePhyCellId
The physical cell identity of the source PCell, used to determine the UE context in the target eNB at re-establishment.
targetCellShortMAC-I
The ShortMAC-I for the target PCell, in order for potential re-establishment to succeed.

– *RRM-Config-NB*

The *RRM-Config-NB* IE contains information about UE specific RRM information which can be utilized by target eNB.

RRM-Config-NB information element

```
-- ASN1START

RRM-Config-NB ::=               SEQUENCE {
    ue-InactiveTime             ENUMERATED {
                                    s1, s2, s3, s5, s7, s10, s15, s20,
                                    s25, s30, s40, s50, min1, min1s20, min1s40,
                                    min2, min2s30, min3, min3s30, min4, min5, min6,
                                    min7, min8, min9, min10, min12, min14, min17, min20,
                                    min24, min28, min33, min38, min44, min50, hr1,
                                    hr1min30, hr2, hr2min30, hr3, hr3min30, hr4, hr5, hr6,
                                    hr8, hr10, hr13, hr16, hr20, day1, day1hr12, day2,
                                    day2hr12, day3, day4, day5, day7, day10, day14, day19,
                                    day24, day30, dayMoreThan30}        OPTIONAL,
    ...
}

-- ASN1STOP
```

RRM-Config-NB field descriptions
ue-InactiveTime
Duration while UE has not received or transmitted any user data. Value s1 corresponds to 1 second, s2 corresponds to 2 seconds and so on. Value min1 corresponds to 1 minute, value min1s20 corresponds to 1 minute and 20 seconds, value min1s40 corresponds to 1 minute and 40 seconds and so on. Value hr1 corresponds to 1 hour, hr1min30 corresponds to 1 hour and 30 minutes and so on.

10.8 Inter-node RRC multiplicity and type constraint values

– Multiplicity and type constraints definitions

– End of *NB-IoT-InterNodeDefinitions*

```
-- ASN1START

END

-- ASN1STOP
```

10.9 Mandatory information in *AS-Config-NB*

The *AS-Config-NB* transferred between source eNB and target-eNB shall include all IEs necessary to describe the AS context. The conditional presence in section 6 is only applicable for eNB to UE communication.

DAINGEAN_0002369

The "Need" or "Cond" statements are not applied in case of sending the IEs from source eNB to target eNB. Some information elements shall be included regardless of the "Need" or "Cond" e.g. *discardTimer*. The *AS-Config-NB* re-uses information elements primarily created to cover the radio interface signalling requirements.

Within the *sourceRadioResourceConfig*, the source eNB shall include fields that are optional for eNB to UE communication, if the functionality is configured unless explicitly specified otherwise in the following:

- in accordance with a condition that is explicitly stated to be applicable; or
- a default value is defined for the concerned field; and the configured value is the same as the default value that is defined; or
- the need of the field is OP and the current UE configuration corresponds with the behaviour defined for absence of the field;

11 UE capability related constraints and performance requirements

11.1 UE capability related constraints

The following table lists constraints regarding the UE capabilities that E-UTRAN is assumed to take into account.

Parameter	Description	Value	NB-IoT
#DRBs	The number of DRBs that a UE shall support	8	(0, 1, 2) NOTE1
#RLC-AM	The number of RLC AM entities that a UE shall support	10	(2, 3) NOTE1
#minCellperMeasObjectEUTRA	The minimum number of neighbour cells (excluding black list cells) that a UE shall be able to store within a MeasObjectEUTRA. NOTE.	32	N/A
#minBlackCellRangesperMeasObjectEUTRA	The minimum number of blacklist cell PCI ranges that a UE shall be able to store within a MeasObjectEUTRA	32	N/A
#minCellperMeasObjectUTRA	The minimum number of neighbour cells that a UE shall be able to store within a MeasObjectUTRA. NOTE.	32	N/A
#minCellperMeasObjectGERAN	The minimum number of neighbour cells that a UE shall be able to store within a measObjectGERAN. NOTE.	32	N/A
#minCellperMeasObjectCDMA2000	The minimum number of neighbour cells that a UE shall be able to store within a measObjectCDMA2000. NOTE.	32	N/A
#minCellTotal	The minimum number of neighbour cells (excluding black list cells) that UE shall be able to store in total in all measurement objects configured	256	N/A
NOTE: In case of CGI reporting, the limit regarding the cells E-UTRAN can configure includes the cell for which the UE is requested to report CGI i.e. the amount of neighbour cells that can be included is at most (# minCellperMeasObjectRAT - 1), where RAT represents EUTRA/UTRA/GERAN/CDMA2000 respectively.			
NOTE1: #DRBs based on UE capability, #RLC-AM =#DRBs + 2.			

11.2 Processing delay requirements for RRC procedures

The UE performance requirements for RRC procedures are specified in the following table for UE other than NB-IOT UEs, by means of a value N:

N = the number of 1ms subframes from the end of reception of the E-UTRAN -> UE message on the UE physical layer up to when the UE shall be ready for the reception of uplink grant for the UE -> E-UTRAN response message with no access delay other than the TTI-alignment (e.g. excluding delays caused by scheduling, the random access procedure or physical layer synchronisation).

NOTE: No processing delay requirements are specified for RN-specific procedures.

DAINGEAN_0002370

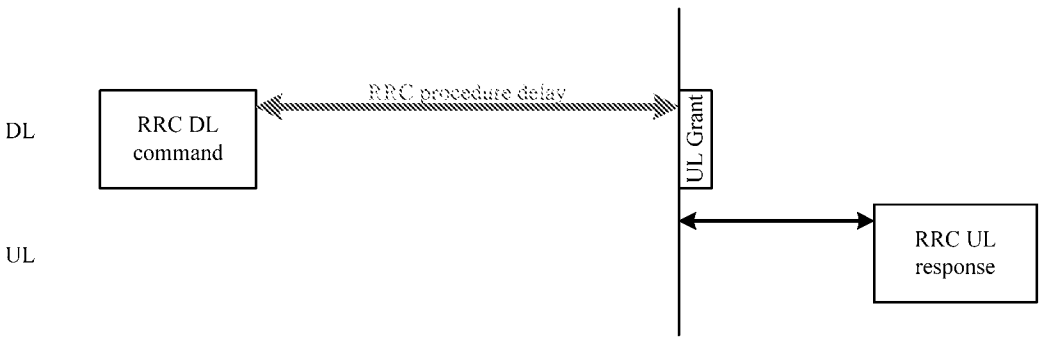


Figure 11.2-1: Illustration of RRC procedure delay

Procedure title:	E-UTRAN -> UE	UE -> E-UTRAN	N	Notes

DAINGEAN_0002371

Procedure title:	E-UTRAN -> UE	UE -> E-UTRAN	N	Notes
RRC Connection Control Procedures				
RRC connection establishment	*RRCConnectionSetup*	*RRCConnectionSetupComplete*	15	
RRC connection release	*RRCConnectionRelease*		NA	
RRC connection re-configuration (radio resource configuration)	*RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	15	
RRC connection re-configuration (measurement configuration)	*RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	15	
RRC connection re-configuration (intra-LTE mobility)	*RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	15	
RRC connection reconfiguration (SCell addition/release)	*RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	20	
RRC connection reconfiguration (SCG establishment/ release, SCG cell addition/ release)	*RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	20	
RRC connection re-establishment	*RRCConnectionReestablishment*	*RRCConnectionReestablishmentComplete*	15	
Initial security activation	*SecurityModeCommand*	*SecurityModeCommandComplete/SecurityModeCommandFailure*	10	
Initial security activation + RRC connection re-configuration (RB establishment)	*SecurityModeCommand, RRCConnectionReconfiguration*	*RRCConnectionReconfigurationComplete*	20	The two DL messages are transmitted in the same TTI
Paging	*Paging*		NA	
Inter RAT mobility				
Handover to E-UTRA	*RRCConnectionReconfiguration (sent by other RAT)*	*RRCConnectionReconfigurationComplete*	NA	The performance of this procedure is specified in [50] in case of handover from GSM and [29], [30] in case of handover from UTRA.
Handover from E-UTRA	*MobilityFromEUTRACommand*		NA	The performance of this procedure is specified in [16]
Handover from E-UTRA to CDMA2000	*HandoverFromEUTRAPreparationRequest (CDMA2000)*		NA	Used to trigger the handover preparation procedure with a CDMA2000 RAT. The performance of this procedure is specified in [16]
Measurement procedures				
Measurement Reporting		*MeasurementReport*	NA	
Other procedures				
UE capability transfer	*UECapabilityEnquiry*	*UECapabilityInformation*	10	
Counter check	*CounterCheck*	*CounterCheckResponse*	10	
Proximity indication		*ProximityIndication*	NA	

DAINGEAN_0002372

Procedure title:	E-UTRAN -> UE	UE -> E-UTRAN	N	Notes
UE information	*UEInformationRequest*	*UEInformationResponse*	15	
MBMS counting	*MBMSCountingRequest*	*MBMSCountingResponse*	NA	
MBMS interest indication		*MBMSInterestIndication*	NA	
In-device coexistence indication		*InDeviceCoexIndication*	NA	
UE assistance information		*UEAssistanceInformation*	NA	
SCG failure information		*SCGFailureInformation*	NA	
Sidelink UE information		*SidelinkUEInformation*	NA	
WLAN Connection Status Reporting		*WLANConnectionStatusReport*	NA	

11.3 Void

Annex A (informative): Guidelines, mainly on use of ASN.1

Editor's note No agreements have been reached concerning the extension of RRC PDUs so far. Any statements in this section about the protocol extension mechanism should be considered as FFS.

A.1 Introduction

The following clauses contain guidelines for the specification of RRC protocol data units (PDUs) with ASN.1.

A.2 Procedural specification

A.2.1 General principles

The procedural specification provides an overall high level description regarding the UE behaviour in a particular scenario.

It should be noted that most of the UE behaviour associated with the reception of a particular field is covered by the applicable parts of the PDU specification. The procedural specification may also include specific details of the UE behaviour upon reception of a field, but typically this should be done only for cases that are not easy to capture in the PDU section e.g. general actions, more complicated actions depending on the value of multiple fields.

Likewise, the procedural specification need not specify the UE requirements regarding the setting of fields within the messages that are send to E-UTRAN i.e. this may also be covered by the PDU specification.

A.2.2 More detailed aspects

The following more detailed conventions should be used:

- Bullets:
  - Capitals should be used in the same manner as in other parts of the procedural text i.e. in most cases no capital applies since the bullets are part of the sentence starting with 'The UE shall:'
  - All bullets, including the last one in a sub-clause, should end with a semi-colon i.e. an ';'

DAINGEAN_0002373

- Conditions

  - Whenever multiple conditions apply, a semi-colon should be used at the end of each conditions with the exception of the last one, i.e. as in 'if cond1; or cond2:

A.3 PDU specification

A.3.1 General principles

A.3.1.1 ASN.1 sections

The RRC PDU contents are formally and completely described using abstract syntax notation (ASN.1), see X.680 [13], X.681 (02/2002) [14].

The complete ASN.1 code is divided into a number of ASN.1 sections in the specifications. In order to facilitate the extraction of the complete ASN.1 code from the specification, each ASN.1 section begins with a text paragraph consisting entirely of an *ASN.1 start tag*, which consists of a double hyphen followed by a single space and the text string "ASN1START" (in all upper case letters). Each ASN.1 section ends with a text paragraph consisting entirely of an *ASN.1 stop tag*, which consists of a double hyphen followed by a single space and the text "ASN1STOP" (in all upper case letters):

```
-- ASN1START

-- ASN1STOP
```

The text paragraphs containing the ASN.1 start and stop tags should not contain any ASN.1 code significant for the complete description of the RRC PDU contents. The complete ASN.1 code may be extracted by copying all the text paragraphs between an ASN.1 start tag and the following ASN.1 stop tag in the order they appear, throughout the specification.

NOTE: A typical procedure for extraction of the complete ASN.1 code consists of a first step where the entire RRC PDU contents description (ultimately the entire specification) is saved into a plain text (ASCII) file format, followed by a second step where the actual extraction takes place, based on the occurrence of the ASN.1 start and stop tags.

A.3.1.2 ASN.1 identifier naming conventions

The naming of identifiers (i.e., the ASN.1 field and type identifiers) should be based on the following guidelines:

- Message (PDU) identifiers should be ordinary mixed case without hyphenation. These identifiers, *e.g.*, the *RRCConnectionModificationCommand*, should be used for reference in the procedure text. Abbreviated forms of these identifiers should not be used.

- Type identifiers other than PDU identifiers should be ordinary mixed case, with hyphenation used to set off acronyms only where an adjacent letter is a capital, *e.g.*, *EstablishmentCause, SelectedPLMN* (not *Selected-PLMN*, since the "d" in "Selected" is lowercase), *InitialUE-Identity* and *MeasSFN-SFN-TimeDifference*.

- Field identifiers shall start with a lowercase letter and use mixed case thereafter, *e.g.*, *establishmentCause*. If a field identifier begins with an acronym (which would normally be in upper case), the entire acronym is lowercase (*plmn-Identity*, not *pLMN-Identity*). The acronym is set off with a hyphen (*ue-Identity*, not *ueIdentity*), in order to facilitate a consistent search pattern with corresponding type identifiers.

- Identifiers that are likely to be keywords of some language, especially widely used languages, such as C++ or Java, should be avoided to the extent possible.

- Identifiers, other than PDU identifiers, longer than 25 characters should be avoided where possible. It is recommended to use abbreviations, which should be done in a consistent manner i.e. use 'Meas' instead of 'Measurement' for all occurrences. Examples of typical abbreviations are given in table A.3.1.2.1-1 below.

- *For future extension:* When an extension is introduced a suffix is added to the identifier of the concerned ASN.1 field and/ or type. A suffix of the form "-rX" is used, with X indicating the release, for ASN.1 fields or types

DAINGEAN_0002374

introduced in a later release (i.e. a release later than the original/ first release of the protocol) as well as for ASN.1 fields or types for which a revision is introduced in a later release replacing a previous version, *e.g.*, *Foo-r9* for the Rel-9 version of the ASN.1 type *Foo*. A suffix of the form "-rXb" is used for the first revision of a field that it appears in the same release (X) as the original version of the field, "-rXc" for a second intra-release revision and so on. A suffix of the form "-vXYZ" is used for ASN.1 fields or types that only are an extension of a corresponding earlier field or type (see sub-clause A.4), e.g., *AnElement-v10b0* for the extension of the ASN.1 type *AnElement* introduced in version 10.11.0 of the specification. A number *0...9, 10, 11, etc.* is used to represent the first part of the version number, indicating the release of the protocol. Lower case letters *a, b, c, etc.* are used to represent the second (and third) part of the version number if they are greater than 9. In the procedural specification, in field descriptions as well as in headings suffices are not used, unless there is a clear need to distinguish the extension from the original field.

- More generally, in case there is a need to distinguish different variants of an ASN.1 field or IE, a suffix should be added at the end of the identifiers e.g. *MeasObjectUTRA*, *ConfigCommon*. When there is no particular need to distinguish the fields (e.g. because the field is included in different IEs), a common field identifier name may be used. This may be attractive e.g. in case the procedural specification is the same for the different variants.

Table A.3.1.2-1: Examples of typical abbreviations used in ASN.1 identifiers

Abbreviation	Abbreviated word
Comm	Communication
Conf	Confirmation
Config	Configuration
Disc	Discovery
DL	Downlink
Ext	Extension
Freq	Frequency
Id	Identity
Ind	Indication
Info	Information
Meas	Measurement
Neigh	Neighbour(ing)
Param(s)	Parameter(s)
Persist	Persistent
Phys	Physical
Proc	Process
Reestab	Reestablishment
Req	Request
Rx	Reception
Sched	Scheduling
Sync	Synchronisation
Thresh	Threshold
Tx/ Transm	Transmission
UL	Uplink

NOTE: The table A.3.1.2.1-1 is not exhaustive. Additional abbreviations may be used in ASN.1 identifiers when needed.

A.3.1.3 Text references using ASN.1 identifiers

A text reference into the RRC PDU contents description from other parts of the specification is made using the ASN.1 field or type identifier of the referenced element. The ASN.1 field and type identifiers used in text references should be in the *italic font style*. The "do not check spelling and grammar" attribute in Word should be set. Quotation marks (i.e., " ") should not be used around the ASN.1 field or type identifier.

A reference to an RRC PDU type should be made using the corresponding ASN.1 type identifier followed by the word "message", e.g., a reference to the *RRCConnectionRelease* message.

A reference to a specific part of an RRC PDU, or to a specific part of any other ASN.1 type, should be made using the corresponding ASN.1 field identifier followed by the word "field", e.g., a reference to the *prioritisedBitRate* field in the example below.

```
-- /example/ ASN1START
```


DAINGEAN_0002375

```
LogicalChannelConfig ::=            SEQUENCE {
    ul-SpecificParameters               SEQUENCE {
        priority                            Priority,
        prioritisedBitRate                  PrioritisedBitRate,
        bucketSizeDuration                  BucketSizeDuration,
        logicalChannelGroup                 INTEGER (0..3)
    }       OPTIONAL
}

-- ASN1STOP
```

NOTE: All the ASN.1 start tags in the ASN.1 sections, used as examples in this annex to the specification, are deliberately distorted, in order not to include them when the ASN.1 description of the RRC PDU contents is extracted from the specification.

A reference to a specific type of information element should be made using the corresponding ASN.1 type identifier preceded by the acronym "IE", e.g., a reference to the IE *LogicalChannelConfig* in the example above.

References to a specific type of information element should only be used when those are generic, i.e., without regard to the particular context wherein the specific type of information element is used. If the reference is related to a particular context, e.g., an RRC PDU type (message) wherein the information element is used, the corresponding field identifier in that context should be used in the text reference.

A reference to a specific value of an ASN.1 field should be made using the corresponding ASN.1 value without using quotation marks around the ASN.1 value, e.g., 'if the *status* field is set to value *true*'.

A.3.2 High-level message structure

Within each logical channel type, the associated RRC PDU (message) types are alternatives within a CHOICE, as shown in the example below.

```
-- /example/ ASN1START

DL-DCCH-Message ::= SEQUENCE {
    message                 DL-DCCH-MessageType
}

DL-DCCH-MessageType ::= CHOICE {
    c1                      CHOICE {
        dlInformationTransfer                   DLInformationTransfer,
        handoverFromEUTRAPreparationRequest     HandoverFromEUTRAPreparationRequest,
        mobilityFromEUTRACommand                MobilityFromEUTRACommand,
        rrcConnectionReconfiguration            RRCConnectionReconfiguration,
        rrcConnectionRelease                    RRCConnectionRelease,
        securityModeCommand                     SecurityModeCommand,
        ueCapabilityEnquiry                     UECapabilityEnquiry,
        spare1 NULL
    },
    messageClassExtension   SEQUENCE {}
}

-- ASN1STOP
```

A nested two-level CHOICE structure is used, where the alternative PDU types are alternatives within the inner level *c1* CHOICE.

Spare alternatives (i.e., *spare1* in this case) may be included within the *c1* CHOICE to facilitate future extension. The number of such spare alternatives should not extend the total number of alternatives beyond an integer-power-of-two number of alternatives (i.e., eight in this case).

Further extension of the number of alternative PDU types is facilitated using the *messageClassExtension* alternative in the outer level CHOICE.

A.3.3 Message definition

Each PDU (message) type is specified in an ASN.1 section similar to the one shown in the example below.

DAINGEAN_0002376

```
-- /example/ ASN1START

RRCConnectionReconfiguration ::=    SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
            rrcConnectionReconfiguration-r8     RRCConnectionReconfiguration-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReconfiguration-r8-IEs ::= SEQUENCE {
    -- Enter the IEs here.
    ...
}

-- ASN1STOP
```

Hooks for *critical* and *non-critical* extension should normally be included in the PDU type specification. How these hooks are used is further described in sub-clause A.4.

Critical extensions are characterised by a redefinition of the PDU contents and need to be governed by a mechanism for protocol version agreement between the encoder and the decoder of the PDU, such that the encoder is prevented from sending a critically extended version of the PDU type, which is not comprehended by the decoder.

Critical extension of a PDU type is facilitated by a two-level CHOICE structure, where the alternative PDU contents are alternatives within the inner level *c1* CHOICE. Spare alternatives (i.e., *spare3* down to *spare1* in this case) may be included within the *c1* CHOICE. The number of spare alternatives to be included in the original PDU specification should be decided case by case, based on the expected rate of critical extension in the future releases of the protocol.

Further critical extension, when the spare alternatives from the original specifications are used up, is facilitated using the *criticalExtensionsFuture* in the outer level CHOICE.

In PDU types where critical extension is not expected in the future releases of the protocol, the inner level *c1* CHOICE and the spare alternatives may be excluded, as shown in the example below.

```
-- /example/ ASN1START

RRCConnectionReconfigurationComplete ::= SEQUENCE {
    rrc-TransactionIdentifier           RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        rrcConnectionReconfigurationComplete-r8
                                            RRCConnectionReconfigurationComplete-r8-IEs,
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCConnectionReconfigurationComplete-r8-IEs ::= SEQUENCE {
    -- Enter the IEs here. --                                                   -- Cond condTag
    ...
}

-- ASN1STOP
```

Non-critical extensions are characterised by the addition of new information to the original specification of the PDU type. If not comprehended, a non-critical extension may be skipped by the decoder, whilst the decoder is still able to complete the decoding of the comprehended parts of the PDU contents.

Non-critical extensions at locations other than the end of the message or other than at the end of a field contained in a BIT or OCTET STRING are facilitated by use of the ASN.1 extension marker "...". The original specification of a PDU type should normally include the extension marker at the end of the sequence of information elements contained.

Non-critical extensions at the end of the message or at the end of a field that is contained in a BIT or OCTET STRING are facilitated by use of an empty sequence that is marked OPTIONAL e.g. as shown in the following example:

```
-- /example/ ASN1START

RRCMessage-r8-IEs ::=               SEQUENCE {
    field1                              InformationElement1,
    field2                              InformationElement2,
```


DAINGEAN_0002377

```
    nonCriticalExtension                SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

The ASN.1 section specifying the contents of a PDU type may be followed by a *field description* table where a further description of, e.g., the semantic properties of the fields may be included. The general format of this table is shown in the example below. The field description table is absent in case there are no fields for which further description needs to be provided e.g. because the PDU does not include any fields, or because an IE is defined for each field while there is nothing specific regarding the use of this IE that needs to be specified.

***%PDU-TypeIdentifier%* field descriptions**
%field identifier%
Field description.
%field identifier%
Field description.

The field description table has one column. The header row shall contain the ASN.1 type identifier of the PDU type.

The following rows are used to provide field descriptions. Each row shall include a first paragraph with a *field identifier* (in ***bold and italic*** font style) referring to the part of the PDU to which it applies. The following paragraphs at the same row may include (in regular font style), e.g., semantic description, references to other specifications and/ or specification of value units, which are relevant for the particular part of the PDU.

The parts of the PDU contents that do not require a field description shall be omitted from the field description table.

A.3.4 Information elements

Each IE (information element) type is specified in an ASN.1 section similar to the one shown in the example below.

```
-- /example/ ASN1START

PRACH-ConfigSIB ::=                 SEQUENCE {
    rootSequenceIndex                   INTEGER (0..1023),
    prach-ConfigInfo                    PRACH-ConfigInfo
}

PRACH-Config ::=                    SEQUENCE {
    rootSequenceIndex                   INTEGER (0..1023),
    prach-ConfigInfo                    PRACH-ConfigInfo                OPTIONAL    -- Need ON
}

PRACH-ConfigInfo ::=                SEQUENCE {
    prach-ConfigIndex                   ENUMERATED {ffs},
    highSpeedFlag                       ENUMERATED {ffs},
    zeroCorrelationZoneConfig           ENUMERATED {ffs}
}

-- ASN1STOP
```

IEs should be introduced whenever there are multiple fields for which the same set of values apply. IEs may also be defined for other reasons e.g. to break down a ASN.1 definition in to smaller pieces.

A group of closely related IE type definitions, like the IEs *PRACH-ConfigSIB* and *PRACH-Config* in this example, are preferably placed together in a common ASN.1 section. The IE type identifiers should in this case have a common base, defined as the *generic type identifier*. It may be complemented by a suffix to distinguish the different variants. The "*PRACH-Config*" is the generic type identifier in this example, and the "*SIB*" suffix is added to distinguish the variant. The sub-clause heading and generic references to a group of closely related IEs defined in this way should use the generic type identifier.

The same principle should apply if a new version, or an extension version, of an existing IE is created for *critical* or *non-critical* extension of the protocol (see sub-clause A.4). The new version, or the extension version, of the IE is included in the same ASN.1 section defining the original. A suffix is added to the type identifier, using the naming conventions defined in sub-clause A.3.1.2, indicating the release or version of the where the new version, or extension version, was introduced.

DAINGEAN_0002378

Local IE type definitions, like the IE *PRACH-ConfigInfo* in the example above, may be included in the ASN.1 section and be referenced in the other IE types defined in the same ASN.1 section. The use of locally defined IE types should be encouraged, as a tool to break up large and complex IE type definitions. It can improve the readability of the code. There may also be a benefit for the software implementation of the protocol end-points, as these IE types are typically provided by the ASN.1 compiler as independent data elements, to be used in the software implementation.

An IE type defined in a local context, like the IE *PRACH-ConfigInfo*, should not be referenced directly from other ASN.1 sections in the RRC specification. An IE type which is referenced in more than one ASN.1 section should be defined in a separate sub-clause, with a separate heading and a separate ASN.1 section (possibly as one in a set of closely related IE types, like the IEs *PRACH-ConfigSIB* and *PRACH-Config* in the example above). Such IE types are also referred to as 'global IEs'.

NOTE: Referring to an IE type, that is defined as a local IE type in the context of another ASN.1 section, does not generate an ASN.1 compilation error. Nevertheless, using a locally defined IE type in that way makes the IE type definition difficult to find, as it would not be visible at an outline level of the specification. It should be avoided.

The ASN.1 section specifying the contents of one or more IE types, like in the example above, may be followed by a *field description* table, where a further description of, e.g., the semantic properties of the fields of the information elements may be included. This table may be absent, similar as indicated in sub-clause A.3.3 for the specification of the PDU type. The general format of the *field description* table is the same as shown in sub-clause A.3.3 for the specification of the PDU type.

A.3.5 Fields with optional presence

A field with optional presence may be declared with the keyword DEFAULT. It identifies a default value to be assumed, if the sender does not include a value for that field in the encoding:

```
-- /example/ ASN1START

PreambleInfo ::=                    SEQUENCE {
    numberOfRA-Preambles                INTEGER (1..64)                 DEFAULT 1,
    ...
}

-- ASN1STOP
```

Alternatively, a field with optional presence may be declared with the keyword OPTIONAL. It identifies a field for which a value can be omitted. The omission carries semantics, which is different from any normal value of the field:

```
-- /example/ ASN1START

PRACH-Config ::=                SEQUENCE {
    rootSequenceIndex               INTEGER (0..1023),
    prach-ConfigInfo                PRACH-ConfigInfo                OPTIONAL    -- Need ON
}

-- ASN1STOP
```

The semantics of an optionally present field, in the case it is omitted, should be indicated at the end of the paragraph including the keyword OPTIONAL, using a short comment text with a need statement. The need statement includes the keyword "Need", followed by one of the predefined semantics tags (OP, ON or OR) defined in sub-clause 6.1. If the semantics tag OP is used, the semantics of the absent field are further specified either in the field description table following the ASN.1 section, or in procedure text.

The addition of OPTIONAL keywords for capability groups is based on the following guideline. If there is more than one field in the lower level IE, then OPTIONAL keyword is added at the group level. If there is only one field in the lower level IE, OPTIONAL keyword is not added at the group level.

A.3.6 Fields with conditional presence

A field with conditional presence is declared with the keyword OPTIONAL. In addition, a short comment text shall be included at the end of the paragraph including the keyword OPTIONAL. The comment text includes the keyword "Cond", followed by a condition tag associated with the field ("UL" in this example):

DAINGEAN_0002379

```
-- /example/ ASN1START

LogicalChannelConfig ::=            SEQUENCE {
    ul-SpecificParameters               SEQUENCE {
        priority                            INTEGER (0),
        ...
    }       OPTIONAL                                                        -- Cond UL
}

-- ASN1STOP
```

When conditionally present fields are included in an ASN.1 section, the field description table after the ASN.1 section shall be followed by a *conditional presence* table. The conditional presence table specifies the conditions for including the fields with conditional presence in the particular ASN.1 section.

Conditional presence	Explanation
UL	**Specification of the conditions for including the field associated with the condition tag = "UL". Semantics in case of optional presence under certain conditions may also be specified.**

The conditional presence table has two columns. The first column (heading: "Conditional presence") contains the condition tag (in *italic* font style), which links the fields with a condition tag in the ASN.1 section to an entry in the table. The second column (heading: "Explanation") contains a text specification of the conditions and requirements for the presence of the field. The second column may also include semantics, in case of an optional presence of the field, under certain conditions i.e. using the same predefined tags as defined for optional fields in A.3.5.

Conditional presence should primarily be used when presence of a field despends on the presence and/ or value of other fields within the same message. If the presence of a field depends on whether another feature/ function has been configured, while this function can be configured indepedently e.g. by another message and/ or at another point in time, the relation is best reflected by means of a statement in the field description table.

If the ASN.1 section does not include any fields with conditional presence, the conditional presence table shall not be included.

Whenever a field is only applicable in specific cases e.g. TDD, use of conditional presence should be considered.

A.3.7 Guidelines on use of lists with elements of SEQUENCE type

Where an information element has the form of a list (the SEQUENCE OF construct in ASN.1) with the type of the list elements being a SEQUENCE data type, an information element shall be defined for the list elements even if it would not otherwise be needed.

For example, a list of PLMN identities with reservation flags is defined as in the following example:

```
-- /example/ ASN1START

PLMN-IdentityInfoList ::=               SEQUENCE (SIZE (1..6)) OF PLMN-IdentityInfo

PLMN-IdentityInfo ::=               SEQUENCE {
    plmn-Identity                       PLMN-Identity,
    cellReservedForOperatorUse          ENUMERATED {reserved, notReserved}
}

-- ASN1STOP
```

rather than as in the following (bad) example, which may cause generated code to contain types with unpredictable names:

```
-- /bad example/ ASN1START

PLMN-IdentityList ::=                   SEQUENCE (SIZE (1..6)) OF SEQUENCE {
    plmn-Identity                           PLMN-Identity,
    cellReservedForOperatorUse              ENUMERATED {reserved, notReserved}
}

-- ASN1STOP
```


DAINGEAN_0002380

A.4 Extension of the PDU specifications

A.4.1 General principles to ensure compatibility

It is essential that extension of the protocol does not affect interoperability i.e. it is essential that implementations based on different versions of the RRC protocol are able to interoperate. In particular, this requirement applies for the following kind of protocol extensions:

- Introduction of new PDU types (i.e. these should not cause unexpected behaviour or damage).
- Introduction of additional fields in an extensible PDUs (i.e. it should be possible to ignore uncomprehended extensions without affecting the handling of the other parts of the message).
- Introduction of additional values of an extensible field of PDUs. If used, the behaviour upon reception of an uncomprehended value should be defined.

It should be noted that the PDU extension mechanism may depend on the logical channel used to transfer the message e.g. for some PDUs an implementation may be aware of the protocol version of the peer in which case selective ignoring of extensions may not be required.

The non-critical extension mechanism is the primary mechanism for introducing protocol extensions i.e. the critical extension mechanism is used merely when there is a need to introduce a 'clean' message version. Such a need appears when the last message version includes a large number of non-critical extensions, which results in issues like readability, overhead associated with the extension markers. The critical extension mechanism may also be considered when it is complicated to accommodate the extensions by means of non-critical extension mechanisms.

A.4.2 Critical extension of messages and fields

The mechanisms to critically extend a message are defined in A.3.3. There are both "outer branch" and "inner branch" mechanisms available. The "outer branch" consists of a CHOICE having the name *criticalExtensions*, with two values, *c1* and *criticalExtensionsFuture*. The *criticalExtensionsFuture* branch consists of an empty SEQUENCE, while the c1 branch contains the "inner branch" mechanism.

The "inner branch" structure is a CHOICE with values of the form "*MessageName-rX-IEs*" (e.g., "*RRCConnectionReconfiguration-r8-IEs*") or "*spareX*", with the spare values having type NULL. The "-rX-IEs" structures contain the *complete* structure of the message IEs for the appropriate release; i.e., the critical extension branch for the Rel-10 version of a message includes all Rel-8 and Rel-9 fields (that are not obviated in the later version), rather than containing only the additional Rel-10 fields.

The following guidelines may be used when deciding which mechanism to introduce for a particular message, i.e. only an 'outer branch', or an 'outer branch' in combination with an 'inner branch' including a certain number of spares:

- For certain messages, e.g. initial uplink messages, messages transmitted on a broadcast channel, critical extension may not be applicable.
- An outer branch may be sufficient for messages not including any fields.
- The number of spares within inner branch should reflect the likelihood that the message will be critically extended in future releases (since each release with a critical extension for the message consumes one of the spare values). The estimation of the critical extension likelyhood may be based on the number, size and changeability of the fields included in the message.
- In messages where an inner branch extension mechanism is available, all spare values of the inner branch should be used before any critical extensions are added using the outer branch.

The following example illustrates the use of the critical extension mechanism by showing the ASN.1 of the original and of a later release

```
-- /example/ ASN1START                  -- Original release

RRCMessage ::=                          SEQUENCE {
    rrc-TransactionIdentifier               RRC-TransactionIdentifier,
    criticalExtensions                  CHOICE {
        c1                                  CHOICE{
```


DAINGEAN_0002381

```
            rrcMessage-r8                       RRCMessage-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

-- ASN1STOP
```

```
-- /example/ ASN1START                      -- Later release

RRCMessage ::=                              SEQUENCE {
    rrc-TransactionIdentifier                   RRC-TransactionIdentifier,
    criticalExtensions                      CHOICE {
        c1                                      CHOICE{
            rrcMessage-r8                           RRCMessage-r8-IEs,
            rrcMessage-r10                          RRCMessage-r10-IEs,
            rrcMessage-r11                          RRCMessage-r11-IEs,
            rrcMessage-r14                          RRCMessage-r14-IEs
        },
        later                               CHOICE {
            c2                                      CHOICE{
                rrcMessage-r16                          RRCMessage-r16-IEs,
                spare7 NULL, spare6 NULL, spare5 NULL, spare4 NULL,
                spare3 NULL, spare2 NULL, spare1 NULL
            },
            criticalExtensionsFuture                SEQUENCE {}
        }
    }
}

-- ASN1STOP
```

It is important to note that critical extensions may also be used at the level of individual fields i.e. a field may be replaced by a critically extended version. When sending the extended version, the original version may also be included (e.g. original field is mandatory, EUTRAN is unaware if UE supports the extended version). In such cases, a UE supporting both versions may be required to ignore the original field. The following example illustrates the use of the critical extension mechanism by showing the ASN.1 of the original and of a later release

```
-- /example/ ASN1START                      -- Original release

RRCMessage ::=                              SEQUENCE {
    rrc-TransactionIdentifier                   RRC-TransactionIdentifier,
    criticalExtensions                      CHOICE {
        c1                                      CHOICE{
            rrcMessage-r8                           RRCMessage-r8-IEs,
            spare3 NULL, spare2 NULL, spare1 NULL
        },
        criticalExtensionsFuture            SEQUENCE {}
    }
}

RRCMessage-rN-IEs ::= SEQUENCE {
    field1-rN                               ENUMERATED {
                                                value1, value2, value3, value4} OPTIONAL,   -- Need ON
    field2-rN                               InformationElement2-rN              OPTIONAL,   -- Need ON
    nonCriticalExtension                    RRCConnectionReconfiguration-vMxy-IEs   OPTIONAL
}

RRCConnectionReconfiguration-vMxy-IEs ::= SEQUENCE {
    field2-rM                               InformationElement2-rM          OPTIONAL, -- Cond NoField2rN
    nonCriticalExtension                    SEQUENCE {}                     OPTIONAL
}

-- ASN1STOP
```

Conditional presence	Explanation
NoField2rN	The field is optionally present, need ON, if *field2-rN* is absent. Otherwise the field is not present

DAINGEAN_0002382

Finally, it is noted that a critical extension may be introduced in the same release as the one in which the original field was introduced e.g. to correct an essential ASN.1 error. In such cases a UE capability may be introduced, to assist E-UTRAN in deciding whether or not to use the critically extension.

A.4.3 Non-critical extension of messages

A.4.3.1 General principles

The mechanisms to extend a message in a non-critical manner are defined in A.3.3. W.r.t. the use of extension markers, the following additional guidelines apply:

- When further non-critical extensions are added to a message that has been critically extended, the inclusion of these non-critical extensions in earlier critical branches of the message should be avoided when possible.
- The extension marker ("...") is the primary non-critical extension mechanism that is used unless a length determinant is not required. Examples of cases where a length determinant is not required:
  - at the end of a message,
  - at the end of a structure contained in a BIT STRING or OCTET STRING
- When an extension marker is available, non-critical extensions are preferably placed at the location (e.g. the IE) where the concerned parameter belongs from a logical/ functional perspective (referred to as the '*default extension location*')
- It is desirable to aggregate extensions of the same release or version of the specification into a group, which should be placed at the lowest possible level.
- In specific cases it may be preferrable to place extensions elsewhere (referred to as the '*actual extension location*') e.g. when it is possible to aggregate several extensions in a group. In such a case, the group should be placed at the lowest suitable level in the message. <TBD: ref to seperate example>
- In case placement at the default extension location affects earlier critical branches of the message, locating the extension at a following higher level in the message should be considered.
- In case an extension is not placed at the default extension location, an IE should be defined. The IE's ASN.1 definition should be placed in the same ASN.1 section as the default extension location. In case there are intermediate levels in-between the actual and the default extension location, an IE may be defined for each level. Intermediate levels are primarily introduced for readability and overview. Hence intermediate levels need not allways be introduced e.g. they may not be needed when the default and the actual extension location are within the same ASN.1 section. <TBD: ref to seperate example>

A.4.3.2 Further guidelines

Further to the general principles defined in the previous section, the following additional guidelines apply regarding the use of extension markers:

- Extension markers within SEQUENCE
  - Extension markers are primarily, but not exclusively, introduced at the higher nesting levels
  - Extension markers are introduced for a SEQUENCE comprising several fields as well as for information elements whose extension would result in complex structures without it (e.g. re-introducing another list)
  - Extension markers are introduced to make it possible to maintain important information structures e.g. parameters relevant for one particular RAT
  - Extension markers are also used for size critical messages (i.e. messages on BCCH, BR-BCCH, PCCH and CCCH), although introduced somewhat more carefully
  - The extension fields introduced (or frozen) in a specific version of the specification are grouped together using double brackets.
- Extension markers within ENUMERATED

DAINGEAN_0002383

- Spare values are used until the number of values reaches the next power of 2, while the extension marker caters for extension beyond that limit
- A suffix of the form "vXYZ" is used for the identifier of each new value, e.g. "value-vXYZ".

- Extension markers within CHOICE:
  - Extension markers are introduced when extension is foreseen and when comprehension is not required by the receiver i.e. behaviour is defined for the case where the receiver cannot comprehend the extended value (e.g. ignoring an optional CHOICE field). It should be noted that defining the behaviour of a receiver upon receiving a not comprehended choice value is not required if the sender is aware whether or not the receiver supports the extended value.
  - A suffix of the form "vXYZ" is used for the identifier of each new choice value, e.g. "choice-vXYZ".

Non-critical extensions at the end of a message/ of a field contained in an OCTET or BIT STRING:

- When a nonCriticalExtension is actually used, a "Need" statement should not be provided for the field, which always is a group including at least one extension and a field facilitating further possible extensions. For simplicity, it is recommended not to provide a "Need" statement when the field is not actually used either.

Further, more general, guidelines:

- In case a need statement is not provided for a group, a "Need" statement is provided for all individual extension fields within the group i.e. including for fields that are not marked as OPTIONAL. The latter is to clarify the action upon absence of the whole group.

A.4.3.3 Typical example of evolution of IE with local extensions

The following example illustrates the use of the extension marker for a number of elementary cases (sequence, enumerated, choice). The example also illustrates how the IE may be revised in case the critical extension mechanism is used.

NOTE In case there is a need to support further extensions of release n while the ASN.1 of release (n+1) has been frozen, without requiring the release n receiver to support decoding of release (n+1) extensions, more advanced mechanisms are needed e.g. including multiple extension markers.

```
-- /example/ ASN1START

InformationElement1 ::=             SEQUENCE {
    field1                              ENUMERATED {
                                            value1, value2, value3, value4-v880,
                                            ..., value5-v960 },
    field2                              CHOICE {
        field2a                             BOOLEAN,
        field2b                             InformationElement2b,
        ...,
        field2c-v960                        InformationElement2c-r9
    },
    ...,
    [[  field3-r9                           InformationElement3-r9      OPTIONAL        -- Need OR
    ]],
    [[  field3-v9a0                         InformationElement3-v9a0    OPTIONAL,       -- Need OR
        field4-r9                           InformationElement4         OPTIONAL        -- Need OR
    ]]
}

InformationElement1-r10 ::=         SEQUENCE {
    field1                              ENUMERATED {
                                            value1, value2, value3, value4-v880,
                                            value5-v960, value6-v1170, spare2, spare1, ... },
    field2                              CHOICE {
        field2a                             BOOLEAN,
        field2b                             InformationElement2b,
        field2c-v960                        InformationElement2c-r9,
        ...,
        field2d-v12b0                       INTEGER (0..63)
    },
    field3-r9                           InformationElement3-r10         OPTIONAL,   -- Need OR
    field4-r9                           InformationElement4             OPTIONAL,   -- Need OR
    field5-r10                          BOOLEAN,
```


DAINGEAN_0002384

```
    field6-r10                      InformationElement6-r10       OPTIONAL,   -- Need OR
    ...,
    [[  field3-v1170                    InformationElement3-v1170       OPTIONAL    -- Need OR
    ]]
}

-- ASN1STOP
```

Some remarks regarding the extensions of *InformationElement1* as shown in the above example:

- The *InformationElement1* is initially extended with a number of non-critical extensions. In release 10 however, a critical extension is introduced for the message using this IE. Consequently, a new version of the IE *InformationElement1* (i.e. *InformationElement1-r10*) is defined in which the earlier non-critical extensions are incorporated by means of a revision of the original field.
- The *value4-v880* is replacing a spare value defined in the original protocol version for *field1*. Likewise *value6-v1170* replaces *spare3* that was originally defined in the r10 version of *field1*
- Within the critically extended release 10 version of *InformationElement1*, the names of the original fields/ IEs are not changed, unless there is a real need to distinguish them from other fields/ IEs. E.g. the *field1* and *InformationElement4* were defined in the original protocol version (release 8) and hence not tagged. Moreover, the *field3-r9* is introduced in release 9 and not re-tagged; although, the *InformationElement3* is also critically extended and therefore tagged *InformationElement3-r10* in the release 10 version of InformationElement1.

A.4.3.4 Typical examples of non critical extension at the end of a message

The following example illustrates the use of non-critical extensions at the end of the message or at the end of a field that is contained in a BIT or OCTET STRING i.e. when an empty sequence is used.

```
-- /example/ ASN1START

RRCMessage-r8-IEs ::=           SEQUENCE {
    field1                          InformationElement1,
    field2                          InformationElement2,
    field3                          InformationElement3             OPTIONAL,   -- Need ON
    nonCriticalExtension            RRCMessage-v860-IEs             OPTIONAL
}

RRCMessage-v860-IEs ::=         SEQUENCE {
    field4-v860                     InformationElement4             OPTIONAL,   -- Need OP
    field5-v860                     BOOLEAN                         OPTIONAL,   -- Cond C54
    nonCriticalExtension            RRCMessage-v940-IEs             OPTIONAL
}

RRCMessage-v940-IEs ::=         SEQUENCE {
    field6-v940                     InformationElement6-r9              OPTIONAL,   -- Need OR
    nonCriticalExtensions           SEQUENCE {}                         OPTIONAL
}

-- ASN1STOP
```

Some remarks regarding the extensions shown in the above example:

- The *InformationElement4* is introduced in the original version of the protocol (release 8) and hence no suffix is used.

A.4.3.5 Examples of non-critical extensions not placed at the default extension location

The following example illustrates the use of non-critical extensions in case an extension is not placed at the default extension location.

DAINGEAN_0002385

– *ParentIE-WithEM*

The IE *ParentIE-WithEM* is an example of a high level IE including the extension marker (EM). The root encoding of this IE includes two lower level IEs *ChildIE1-WithoutEM* and *ChildIE2-WithoutEM* which not include the extension marker. Consequently, non-critical extensions of the Child-IEs have to be included at the level of the Parent-IE.

The example illustrates how the two extension IEs *ChildIE1-WithoutEM-vNx0* and *ChildIE2-WithoutEM-vNx0* (both in release N) are used to connect non-critical extensions with a default extension location in the lower level IEs to the actual extension location in this IE.

ParentIE-WithEM information element

```
-- /example/ ASN1START

ParentIE-WithEM ::=                 SEQUENCE {
    -- Root encoding, including:
    childIE1-WithoutEM                   ChildIE1-WithoutEM             OPTIONAL,       -- Need ON
    childIE2-WithoutEM                   ChildIE2-WithoutEM             OPTIONAL,       -- Need ON
    ...,
    [[  childIE1-WithoutEM-vNx0              ChildIE1-WithoutEM-vNx0     OPTIONAL,       -- Need ON
        childIE2-WithoutEM-vNx0              ChildIE2-WithoutEM-vNx0     OPTIONAL        -- Need ON
    ]]
}

-- ASN1STOP
```

Some remarks regarding the extensions shown in the above example:

- The fields *childIEx-WithoutEM-vNx0* may not really need to be optional (depends on what is defined at the next lower level).
- In general, especially when there are several nesting levels, fields should be marked as optional only when there is a clear reason.

– *ChildIE1-WithoutEM*

The IE *ChildIE1-WithoutEM* is an example of a lower level IE, used to control certain radio configurations including a configurable feature which can be setup or released using the local IE *ChIE1-ConfigurableFeature*. The example illustrates how the new field *chIE1-NewField* is added in release N to the configuration of the configurable feature. The example is based on the following assumptions:

- when initially configuring as well as when modifying the new field, the original fields of the configurable feature have to be provided also i.e. as if the extended ones were present within the setup branch of this feature.
- when the configurable feature is released, the new field should be released also.
- when omitting the original fields of the configurable feature the UE continues using the existing values (which is used to optimise the signalling for features that typically continue unchanged upon handover).
- when omitting the new field of the configurable feature the UE releases the existing values and discontinues the associated functionality (which may be used to support release of unsupported functionality upon handover to an eNB supporting an earlier protocol version).

The above assumptions, which affect the use of conditions and need codes, may not always apply. Hence, the example should not be re-used blindly.

ChildIE1-WithoutEM information elements

```
-- /example/ ASN1START

ChildIE1-WithoutEM ::=              SEQUENCE {
    -- Root encoding, including:
    chIE1-ConfigurableFeature            ChIE1-ConfigurableFeature      OPTIONAL        -- Need ON
}
```


DAINGEAN_0002386

```
ChildIE1-WithoutEM-vNx0 ::=     SEQUENCE {
    chIE1-ConfigurableFeature-vNx0      ChIE1-ConfigurableFeature-vNx0  OPTIONAL    -- Cond ConfigF
}

ChIE1-ConfigurableFeature ::=       CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        -- Root encoding
    }
}

ChIE1-ConfigurableFeature-vNx0 ::=  SEQUENCE {
    chIE1-NewField-rN                   INTEGER (0..31)
}

-- ASN1STOP
```

Conditional presence	Explanation
ConfigF	The field is optional present, need OR, in case of *chIE1-ConfigurableFeature* is included and set to "setup"; otherwise the field is not present and the UE shall delete any existing value for this field.

– *ChildIE2-WithoutEM*

The IE *ChildIE2-WithoutEM* is an example of a lower level IE, typically used to control certain radio configurations. The example illustrates how the new field *chIE1-NewField* is added in release N to the configuration of the configurable feature.

***ChildIE2-WithoutEM* information element**

```
-- /example/ ASN1START

ChildIE2-WithoutEM ::=              CHOICE {
    release                             NULL,
    setup                               SEQUENCE {
        -- Root encoding
    }
}

ChildIE2-WithoutEM-vNx0 ::=         SEQUENCE {
    chIE2-NewField-rN                   INTEGER (0..31)             OPTIONAL    -- Cond ConfigF
}

-- ASN1STOP
```

Conditional presence	Explanation
ConfigF	The field is optional present, need OR, in case of *chIE2-ConfigurableFeature* is included and set to "setup"; otherwise the field is not present and the UE shall delete any existing value for this field.

A.5 Guidelines regarding inclusion of transaction identifiers in RRC messages

The following rules provide guidance on which messages should include a Transaction identifier

1: DL messages on CCCH that move UE to RRC-Idle should not include the RRC transaction identifier.

2: All network initiated DL messages by default should include the RRC transaction identifier.

3: All UL messages that are direct response to a DL message with an RRC Transaction identifier should include the RRC Transaction identifier.

4: All UL messages that require a direct DL response message should include an RRC transaction identifier.

DAINGEAN_0002387

5: All UL messages that are not in response to a DL message nor require a corresponding response from the network should not include the RRC Transaction identifier.

A.6 Protection of RRC messages (informative)

The following list provides information which messages can be sent (unprotected) prior to security activation and which messages can be sent unprotected after security activation. Those messages indicated "-" in "P" column should never be sent unprotected by eNB or UE. Further requirements are defined in the procedural text.

P…Messages that can be sent (unprotected) prior to security activation

A - I…Messages that can be sent without integrity protection after security activation

A - C…Messages that can be sent unciphered after security activation

NA… Message can never be sent after security activation

DAINGEAN_0002388

Message	P	A-I	A-C	Comment
CSFBParametersRequestCDMA2000	+	-	-	
CSFBParametersResponseCDMA2000	+	-	-	
CounterCheck	-	-	-	
CounterCheckResponse	-	-	-	
DLInformationTransfer	+	-	-	
HandoverFromEUTRAPreparationRequest (CDMA2000)	-	-	-	
InDeviceCoexIndication	-	-	-	
InterFreqRSTDMeasurementIndication	-	-	-	
LoggedMeasurementsConfiguration	-	-	-	
MasterInformationBlock	+	+	+	
MBMSCountingRequest	+	+	+	
MBMSCountingResponse	-	-	-	
MBMSInterestIndication	+	-	-	
MBSFNAreaConfiguration	+	+	+	
MeasurementReport	-	-	-	RAN2 agreed that measurement configuration may be sent prior to security activation. But: In order to protect privacy of UEs MEASUREMENT REPORT is only be sent from the UE after successful security activation.
MobilityFromEUTRACommand	-	-	-	
Paging	+	+	+	
ProximityIndication	-	-	-	
RNReconfiguration	-	-	-	
RNReconfigurationComplete	-	-	-	
RRCConnectionReconfiguration	+	-	-	The message shall not be sent unprotected before security activation if it is used to perform handover or to establish SRB2 and DRBs
RRCConnectionReconfigurationComplete	+	-	-	Unprotected, if sent as response to RRCConnectionReconfiguration which was sent before security activation
RRCConnectionReestablishment	-	+	+	This message is not protected by PDCP operation.
RRCConnectionReestablishmentComplete	-	-	-	
RRCConnectionReestablishmentReject	-	+	+	One reason to send this may be that the security context has been lost, therefore sent as unprotected.
RRCConnectionReestablishmentRequest	-	-	+	This message is not protected by PDCP operation. However a short MAC-I is included.
RRCConnectionReject	+	NA	NA	
RRCConnectionRelease	+	-	-	Justification for P: If the RRC connection only for signalling not requiring DRBs or ciphered messages, or the signalling connection has to be released prematurely, this message is sent as unprotected.
RRCConnectionRequest	+	NA	NA	
RRCConnectionResume	-	-	+	
RRCConnectionResumeRequest	-	-	+	This message is not protected by PDCP operation. However a short MAC-I is included.
RRCConnectionResumeComplete	-	-	-	
RRCConnectionSetup	+	NA	NA	
RRCConnectionSetupComplete	+	NA	NA	
SCGFailureInformation	-	-	-	
SCPTMConfiguration	+	+	+	
SecurityModeCommand	+	NA	NA	Integrity protection applied, but no ciphering (integrity verification done after the message received by RRC)

DAINGEAN_0002389

Message	P	A-I	A-C	Comment
SecurityModeComplete	-	NA	NA	Integrity protection applied, but no ciphering. Ciphering is applied after completing the procedure.
SecurityModeFailure	+	NA	NA	Neither integrity protection nor ciphering applied.
SidelinkUEInformation	+	-	-	
SystemInformation	+	+	+	
SystemInformationBlockType1	+	+	+	
UEAssistanceInformation	-	-	-	
UECapabilityEnquiry	+	-	-	
UECapabilityInformation	+	-	-	
UEInformationRequest	-	-	-	
UEInformationResponse	-	-	-	In order to protect privacy of UEs UEInformationResponse is only be sent from the UE after successful security activation
ULHandoverPreparationTransfer (CDMA2000)	-	-	-	This message should follow HandoverFromEUTRAPreparationRequest
ULInformationTransfer	+	-	-	
WLANConnectionStatusReport	-	-	-	

A.7 Miscellaneous

The following miscellaneous conventions should be used:

- References: Whenever another specification is referenced, the specification number and optionally the relevant subclause, table or figure, should be indicated in addition to the pointer to the References section e.g. as follows: 'see TS 36.212 [22, 5.3.3.1.6]'.

- UE capabilities: TS 36.306 [5] specifies that E-UTRAN should in general respect the UE's capabilities. Hence there is no need to include statement clarifying that E-UTRAN, when setting the value of a certain configuration field, shall respect the related UE capabilities unless there is a particular need e.g. particularly complicated cases.

Annex B (normative): Release 8 and 9 AS feature handling

B.1 Feature group indicators

This annex contains the definitions of the bits in fields *featureGroupIndicators* (in Table B.1-1) and *featureGroupIndRel9Add* (in Table B.1-1a).

In this release of the protocol, the UE shall include the fields *featureGroupIndicators* in the IE *UE-EUTRA-Capability* and *featureGroupIndRel9Add* in the IE *UE-EUTRA-Capability-v9a0*. All the functionalities defined within the field *featureGroupIndicators* defined in Table B.1-1 or Table B.1-1a are mandatory for the UE (with exceptions for category M1 UE), if the related capability (frequency band, RAT, SR-VCC or Inter-RAT ANR) is also supported. For a specific indicator, if all functionalities for a feature group listed in Table B.1-1 have been implemented and tested, the UE shall set the indicator as one (1), else (i.e. if any one of the functionalities in a feature group listed in Table B.1-1 or Table B.1-1a, which have not been implemented or tested), the UE shall set the indicator as zero (0).

The UE shall set all indicators that correspond to RATs not supported by the UE as zero (0).

The UE shall set all indicators, which do not have a definition in Table B.1-1 or Table B.1-1a, as zero (0).

If the optional fields *featureGroupIndicators* or *featureGroupIndRel9Add* are not included by a UE of a future release, the network may assume that all features pertaining to the RATs supported by the UE, respectively listed in Table B.1-1 or Table B.1-1a and deployed in the network, have been implemented and tested by the UE.

In Table B.1-1, a 'VoLTE capable UE' corresponds to a UE which is IMS voice capable and a 'MCPTT capable UE' corresponds to a UE which supports MCPTT voice application as defined in TS 23.179 [73].

DAINGEAN_0002390

The indexing in Table B.1-1a starts from index 33, which is the leftmost bit in the field *featureGroupIndRel9Add*.

Table B.1-1: Definitions of feature group indicators

Index of indicator (bit number)	**Definition** (description of the supported functionality, if indicator set to one)	**Notes**	**If indicated "Yes" the feature shall be implemented and successfully tested for this version of the specification**	***FDD/ TDD diff***
1 (leftmost bit)	- Intra-subframe frequency hopping for PUSCH scheduled by UL grant - DCI format 3a (TPC commands for PUCCH and PUSCH with single bit power adjustments) - Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-0 – UE selected subband CQI without PMI - Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-2 – UE selected subband CQI with multiple PMI	- set to 1 by category M1 UE that has implemented and successfully tested "Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-0 – UE selected subband CQI without PM"		Yes
2	- Simultaneous CQI and ACK/NACK on PUCCH, i.e. PUCCH format 2a and 2b - Absolute TPC command for PUSCH - Resource allocation type 1 for PDSCH - Periodic CQI/PMI/RI reporting on PUCCH: Mode 2-0 – UE selected subband CQI without PMI - Periodic CQI/PMI/RI reporting on PUCCH: Mode 2-1 – UE selected subband CQI with single PMI	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		Yes
3	- 5bit RLC UM SN - 7bit PDCP SN	- can only be set to 1 if the UE has set bit number 7 to 1.	Yes, if UE supports VoLTE, MCPTT, or both. Yes, if UE supports SRVCC to EUTRAN from GERAN.	No
4	- Short DRX cycle	- can only be set to 1 if the UE has set bit number 5 to 1.		Yes

DAINGEAN_0002391

5	- Long DRX cycle - DRX command MAC control element		Yes	No
6	- Prioritised bit rate		Yes	No
7	- RLC UM	- can only be set to 0 if the UE does neither support VoLTE nor MCPTT	Yes, if UE supports VoLTE, MCPTT, or both. Yes, if UE supports SRVCC to EUTRAN from GERAN.	No
8	- EUTRA RRC_CONNECTED to UTRA FDD or UTRA TDD CELL_DCH PS handover, if the UE supports either only UTRAN FDD or only UTRAN TDD - EUTRA RRC_CONNECTED to UTRA FDD CELL_DCH PS handover, if the UE supports both UTRAN FDD and UTRAN TDD	- can only be set to 1 if the UE has set bit number 22 to 1	Yes (except for category M1 UE) for FDD, if UE supports UTRA FDD.	Yes
9	- EUTRA RRC_CONNECTED to GERAN GSM_Dedicated handover	- related to SR-VCC - can only be set to 1 if the UE has set bit number 23 to 1	Yes (except for category M1 UE), if UE supports SRVCC to EUTRAN from GERAN.	Yes
10	- EUTRA RRC_CONNECTED to GERAN (Packet_) Idle by Cell Change Order - EUTRA RRC_CONNECTED to GERAN (Packet_) Idle by Cell Change Order with NACC (Network Assisted Cell Change)			Yes
11	- EUTRA RRC_CONNECTED to CDMA2000 1xRTT CS Active handover	- related to SR-VCC - can only be set to 1 if the UE has sets bit number 24 to 1		Yes
12	- EUTRA RRC_CONNECTED to CDMA2000 HRPD Active handover	- can only be set to 1 if the UE has set bit number 26 to 1		Yes
13	- Inter-frequency handover (within FDD or TDD)	- can only be set to 1 if the UE has set bit number 25 to 1	Yes (except for category M1 UE), unless UE only supports band 13	No
14	- Measurement reporting event: Event A4 – Neighbour > threshold - Measurement reporting event: Event A5 – Serving < threshold1 & Neighbour > threshold2		Yes (except for category M1 UE)	No
15	- Measurement reporting event: Event B1 – Neighbour > threshold for UTRAN FDD or UTRAN TDD, if the UE supports either only UTRAN FDD or only UTRAN TDD and has set bit number 22 to 1 - Measurement reporting event: Event B1 – Neighbour > threshold for UTRAN FDD or UTRAN TDD, if the UE supports both UTRAN FDD and UTRAN TDD and has set bit number 22 or 39 to 1, respectively - Measurement reporting event: Event B1 – Neighbour > threshold for GERAN, 1xRTT or HRPD, if the UE has set bit number 23, 24 or 26 to 1, respectively	- can only be set to 1 if the UE has set at least one of the bit number 22, 23, 24, 26 or 39 to 1. - even if the UE sets bits 41, it shall still set bit 15 to 1 if measurement reporting event B1 is tested for all RATs supported by UE - If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, if UE supports only UTRAN FDD and does not support UTRAN TDD or GERAN or 1xRTT or HRPD	Yes
16	- Intra-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* - Inter-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells*, if the UE has set bit number 25 to 1	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes	No

DAINGEAN_0002392

	- Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* for UTRAN FDD or UTRAN TDD, if the UE supports either only UTRAN FDD or only UTRAN TDD and has set bit number 22 to 1 - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* for UTRAN FDD or UTRAN TDD, if the UE supports both UTRAN FDD and UTRAN TDD and has set bit number 22 or 39 to 1, respectively - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* for GERAN, 1xRTT or HRPD, if the UE has set bit number 23, 24 or 26 to 1, respectively. NOTE: Event triggered periodical reporting (i.e., with *triggerType* set to *event* and with *reportAmount* > 1) is a mandatory functionality of event triggered reporting and therefore not the subject of this bit.			
17	Intra-frequency ANR features including: - Intra-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* - Intra-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 to 1. - If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes	No
18	Inter-frequency ANR features including: - Inter-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* - Inter-frequency periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and bit number 25 to 1. - If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes, unless UE only supports band 13	No
19	Inter-RAT ANR features including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* for GERAN, if the UE has set bit number 23 to 1 - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* for UTRAN FDD or UTRAN TDD, if the UE supports either only UTRAN FDD or only UTRAN TDD and has set bit number 22 to 1 - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* for UTRAN FDD or UTRAN TDD, if the UE supports both UTRAN FDD and UTRAN TDD and has set bit number 22 or 39 to 1, respectively	- can only be set to 1 if the UE has set bit number 5 to 1 and the UE has set at least one of the bit number 22, 23, 24 or 26 to 1. - even if the UE sets bits 33 to 37, it shall still set bit 19 to 1 if inter-RAT ANR features are tested for all RATs for which inter-RAT measurement reporting is indicated as tested		Yes

DAINGEAN_0002393

	- Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* for 1xRTT or HRPD, if the UE has set bit number 24 or 26 to 1, respectively - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI* for UTRAN FDD or UTRAN TDD, if the UE supports either only UTRAN FDD or only UTRANTDD and has set bit number 22 to 1 - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI* for UTRAN FDD or UTRAN TDD, if the UE supports both UTRAN FDD and UTRAN TDD and has set bit number 22 or 39 to 1, respectively - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI* for GERAN, 1xRTT or HRPD, if the UE has set bit number 23, 24 or 26 to 1, respectively			
20	If bit number 7 is set to 0: - SRB1 and SRB2 for DCCH + 8x AM DRB If bit number 7 is set to 1: - SRB1 and SRB2 for DCCH + 8x AM DRB - SRB1 and SRB2 for DCCH + 5x AM DRB + 3x UM DRB NOTE: UE which indicate support for a DRB combination also support all subsets of the DRB combination. Therefore, release of DRB(s) never results in an unsupported DRB combination.	- Regardless of what bit number 7 and bit number 20 is set to, UE shall support at least SRB1 and SRB2 for DCCH + 4x AM DRB - Regardless of what bit number 20 is set to, if bit number 7 is set to 1, UE shall support at least SRB1 and SRB2 for DCCH + 4x AM DRB + 1x UM DRB	Yes	No
21	- Predefined intra- and inter-subframe frequency hopping for PUSCH with N_sb > 1 - Predefined inter-subframe frequency hopping for PUSCH with N_sb > 1	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		No
22	- UTRAN FDD or UTRAN TDD measurements, reporting and measurement reporting event B2 in E-UTRA connected mode, if the UE supports either only UTRAN FDD or only UTRAN TDD - UTRAN FDD measurements, reporting and measurement reporting event B2 in E-UTRA connected mode, if the UE supports both UTRAN FDD and UTRAN TDD	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, if UE supports UTRA FDD	Yes
23	- GERAN measurements, reporting and measurement reporting event B2 in E-UTRA connected mode	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		Yes
24	- 1xRTT measurements, reporting and measurement reporting event B2 in E-UTRA connected mode	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, if UE supports enhanced 1xRTT CSFB for FDD Yes for TDD, if UE	Yes

DAINGEAN_0002394

			supports enhanced 1xRTT CSFB for TDD	
25	- Inter-frequency measurements and reporting in E-UTRA connected mode NOTE: The UE setting this bit to 1 and indicating support for FDD and TDD frequency bands in the UE capability signalling implements and is tested for FDD measurements while the UE is in TDD, and for TDD measurements while the UE is in FDD.	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes, unless UE only supports band 13	No
26	- HRPD measurements, reporting and measurement reporting event B2 in E-UTRA connected mode	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, if UE supports HRPD	Yes
27	- EUTRA RRC_CONNECTED to UTRA FDD or UTRA TDD CELL_DCH CS handover, if the UE supports either only UTRAN FDD or only UTRAN TDD - EUTRA RRC_CONNECTED to UTRA FDD CELL_DCH CS handover, if the UE supports both UTRAN FDD and UTRAN TDD	- related to SR-VCC - can only be set to 1 if the UE has set bit number 8 to 1 and supports SR-VCC from EUTRA defined in TS 24.008 [49] - If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, if UE supports VoLTE and UTRA FDD	Yes
28	- TTI bundling	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD	Yes
29	- Semi-Persistent Scheduling	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		Yes
30	- Handover between FDD and TDD	- can only be set to 1 if the UE has set bit number 13 to 1		No
31	- Indicates whether the UE supports the mechanisms defined for cells broadcasting multi band information i.e. comprehending *multiBandInfoList*, disregarding in RRC_CONNECTED the related system information fields and understanding the EARFCN signalling for all bands, that overlap with the bands supported by the UE, and that are defined in the earliest version of TS 36.101 [42] that includes all UE supported bands.		Yes	No
32	Undefined			

NOTE: The column FDD/ TDD diff indicates if the UE is allowed to signal different values for FDD and TDD.

DAINGEAN_0002395

Table B.1-1a: Definitions of feature group indicators

Index of indicator (bit number)	**Definition** (description of the supported functionality, if indicator set to one)	**Notes**	**If indicated "Yes" the feature shall be implemented and successfully tested for this version of the specification**	***FDD/ TDD diff***
33 (leftmost bit)	Inter-RAT ANR features for UTRAN FDD including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and bit number 22 to 1.		Yes
34	Inter-RAT ANR features for GERAN including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCells* - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and bit number 23 to 1.		Yes
35	Inter-RAT ANR features for 1xRTT including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and bit number 24 to 1.		Yes
36	Inter-RAT ANR features for HRPD including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and bit number 26 to 1.		Yes
37	Inter-RAT ANR features for UTRAN TDD including: - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportStrongestCellsForSON* - Inter-RAT periodical measurement reporting where *triggerType* is set to *periodical* and *purpose* is set to *reportCGI*	- can only be set to 1 if the UE has set bit number 5 and at least one of the bit number 22 (for UEs supporting only UTRA TDD) or the bit number 39 to 1.		Yes
38	- EUTRA RRC_CONNECTED to UTRA TDD CELL_DCH PS handover, if the UE supports both UTRAN FDD and UTRAN TDD	- can only be set to 1 if the UE has set bit number 39 to 1		Yes
39	- UTRAN TDD measurements, reporting and measurement reporting event B2 in E-UTRA connected mode, if the UE supports both UTRAN FDD and UTRAN TDD	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		Yes
40	- EUTRA RRC_CONNECTED to UTRA	- related to SR-VCC		Yes

DAINGEAN_0002396

	TDD CELL_DCH CS handover, if the UE supports both UTRAN FDD and UTRAN TDD	- can only be set to 1 if the UE has set bit number 38 to 1		
41	Measurement reporting event: Event B1 – Neighbour > threshold for UTRAN FDD, if the UE supports UTRAN FDD and has set bit number 22 to 1	- If a category M1 UE does not support this feature group, this bit shall be set to 0.	Yes for FDD, unless UE has set bit number 15 to 1	Yes
42	- DCI format 3a (TPC commands for PUCCH and PUSCH with single bit power adjustments)			
43	Undefined			
44	Undefined			
45	Undefined			
46	Undefined			
47	Undefined			
48	Undefined			
49	Undefined			
50	Undefined			
51	Undefined			
52	Undefined			
53	Undefined			
54	Undefined			
55	Undefined			
56	Undefined			
57	Undefined			
58	Undefined			
59	Undefined			
60	Undefined			
61	Undefined			
62	Undefined			
63	Undefined			
64	Undefined			

NOTE: The column FDD/ TDD diff indicates if the UE is allowed to signal different values for FDD and TDD. Annex E specifies for which TDD and FDD serving cells a UE supporting TDD/FDD CA shall support a feature for which it indicates support within the FGI signalling.

Clarification for mobility from EUTRAN and inter-frequency handover within EUTRAN

There are several feature groups related to mobility from E-UTRAN and inter-frequency handover within EUTRAN. The description of these features is based on the assumption that we have 5 main "functions" related to mobility from E-UTRAN:

A. Support of measurements and cell reselection procedure in idle mode

B. Support of RRC release with redirection procedure in connected mode

C. Support of Network Assisted Cell Change in connected mode

D. Support of measurements and reporting in connected mode

E. Support of handover procedure in connected mode

All functions can be applied for mobility to Inter-frequency to EUTRAN, GERAN, UTRAN, CDMA2000 HRPD and CDMA2000 1xRTT except for function C) which is only applicable for mobility to GERAN. Table B.1-2 below summarises the mobility functions that are supported based on the UE capability signaling (band support) and the setting of the feature group support indicators.

DAINGEAN_0002397

Table B.1-2: Mobility from E-UTRAN

Feature	GERAN	UTRAN	HRPD	1xRTT	EUTRAN
A. Measurements and cell reselection procedure in E-UTRA idle mode	Supported if GERAN band support is indicated	Supported if UTRAN band support is indicated	Supported if CDMA2000 HRPD band support is indicated	Supported if CDMA2000 1xRTT band support is indicated	Supported for supported bands
B. RRC release with blind redirection procedure in E-UTRA connected mode	Supported if GERAN band support is indicated	Supported if UTRAN band support is indicated	Supported if CDMA2000 HRPD band support is indicated	Supported if CDMA2000 1xRTT band support is indicated	Supported for supported bands
C. Cell Change Order (with or without) Network Assisted Cell Change) in E-UTRA connected mode	Group 10	N.A.	N.A	N.A	N.A.
D. Inter-frequency/RAT measurements, reporting and measurement reporting event B2 (for inter-RAT) in E-UTRA connected mode	Group 23	Group 22/39	Group 26	Group 24	Group 25
E. Inter-frequency/RAT handover procedure in E-UTRA connected mode	Group 9 (GSM_connected handover) Separate UE capability bit defined in TS 36.306 [5] for PS handover	Group 8/38 (PS handover) or Group 27/40 (SRVCC handover)	Group 12	Group 11	Group 13 (within FDD or TDD) Group 30 (between FDD and TDD)

In case measurements and reporting function is not supported by UE, the network may still issue the mobility procedures redirection (B) and CCO (C) in a blind fashion.

B.2 CSG support

In this release of the protocol, it is mandatory for the UE to support a minimum set of CSG functionality consisting of:

- Identifying whether a cell is CSG or not;
- Ignoring CSG cells in cell selection/reselection.

Additional CSG functionality in AS, i.e. the requirement to detect and camp on CSG cells when the "CSG whitelist" is available or when manual CSG selection is triggered by the user, are related to the corresponding NAS features. This additional AS functionality consists of:

- Manual CSG selection;
- Autonomous CSG search;
- Implicit priority handling for cell reselection with CSG cells.

It is possible that this additional CSG functionality in AS is not supported or tested in early UE implementations.

Note that since the above AS features relate to idle mode operations, the capability support is not signalled to the network. For these reasons, no "feature group indicator" is assigned to this feature to indicate early support in Rel-8.

DAINGEAN_0002398

Annex C (normative):Release 10 AS feature handling

C.1 Feature group indicators

This annex contains the definitions of the bits in field *featureGroupIndRel10*.

In this release of the protocol, the UE shall include the field *featureGroupIndRel10* in the IE *UE-EUTRA-Capability-v1020-IEs*. All the functionalities defined within the field *featureGroupIndRel10* defined in Table C.1-1 are mandatory for the UE, if the related capability (spatial multiplexing in UL, PDSCH transmission mode 9, carrier aggregation, handover to EUTRA, or RAT) is also supported. For a specific indicator, if all functionalities for a feature group listed in Table C.1-1 have been implemented and tested, the UE shall set the indicator as one (1), else (i.e. if any one of the functionalities in a feature group listed in Table C.1-1 have not been implemented or tested), the UE shall set the indicator as zero (0).

The UE shall set all indicators that correspond to RATs not supported by the UE as zero (0).

The UE shall set all indicators, which do not have a definition in Table C.1-1, as zero (0).

If the optional field *featureGroupIndRel10* is not included by a UE of a future release, the network may assume that all features, listed in Table C.1-1 and deployed in the network, have been implemented and tested by the UE.

The indexing in Table C.1-1 starts from index 101, which is the leftmost bit in the field *featureGroupIndRel10*.

Table C.1-1: Definitions of feature group indicators

Index of indicator	Definition (description of the supported functionality, if indicator set to one)	Notes	If indicated "Yes" the feature shall be implemented and successfully tested for this version of the specification	FDD/ TDD diff
101 (leftmost bit)	- DMRS with OCC (orthogonal cover code) and SGH (sequence group hopping) disabling	- if the UE supports two or more layers for spatial multiplexing in UL, this bit shall be set to 1. - If a category 0 UE does not support this feature, this bit shall be set to 0.		No
102	- Trigger type 1 SRS (aperiodic SRS) transmission (Up to X ports) NOTE: X = number of supported layers on given band			Yes
103	- PDSCH transmission mode 9 when up to 4 CSI reference signal ports are configured	- for Category 8 UEs, this bit shall be set to 1.		Yes
104	- PDSCH transmission mode 9 for TDD when 8 CSI reference signal ports are configured	- if the UE does not support TDD, this bit is irrelevant (capability signalling exists for FDD for this feature), and this bit shall be set to 0. - for Category 8 UEs, this bit shall be set to 1.		No
105	- Periodic CQI/PMI/RI reporting on PUCCH: Mode 2-0 – UE selected subband CQI without PMI, when PDSCH transmission mode 9 is configured - Periodic CQI/PMI/RI reporting on PUCCH: Mode 2-1 – UE selected subband CQI with single PMI, when PDSCH transmission mode 9 and up to 4 CSI reference signal ports are configured	- this bit can be set to 1 only if indices 2 (Table B.1-1) and 103 are set to 1. - For UEs capable of TDD-FDD CA, this bit can be set to 1 for both FDD and TDD if index 2 is set to 1 for both FDD and TDD, and index 103 is set to 1 either for FDD and TDD.		Yes

DAINGEAN_0002399

106	- Periodic CQI/PMI/RI/PTI reporting on PUCCH: Mode 2-1 – UE selected subband CQI with single PMI, when PDSCH transmission mode 9 and 8 CSI reference signal ports are configured	- this bit can be set to 1 only if the UE supports PDSCH transmission mode 9 with 8 CSI reference signal ports (i.e., for TDD, if index 104 is set to 1, and for FDD, if *tm9-With-8Tx-FDD-r10* is set to 'supported') and if index 2 (Table B.1-1) is set to 1. - For UEs capable of TDD-FDD CA, this bit can be set to 1 for both FDD and TDD if either index 104 is set to 1 or *tm9-With-8Tx-FDD-r10* is set to 'supported', and if index 2 is set to 1 for both FDD and TDD.		Yes
107	- Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-0 – UE selected subband CQI without PMI, when PDSCH transmission mode 9 is configured - Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-2 – UE selected subband CQI with multiple PMI, when PDSCH transmission mode 9 and up to 4 CSI reference signal ports are configured	- this bit can be set to 1 only if indices 1 (Table B.1-1) and 103 are set to 1.		Yes
108	- Aperiodic CQI/PMI/RI reporting on PUSCH: Mode 2-2 – UE selected subband CQI with multiple PMI, when PDSCH transmission mode 9 and 8 CSI reference signal ports are configured	- this bit can be set to 1 only if the UE supports PDSCH transmission mode 9 with 8 CSI reference signal ports (i.e., for TDD, if index 104 is set to 1, and for FDD, if *tm9-With-8Tx-FDD-r10* is set to 'supported') and if index 1 (Table B.1-1) is set to 1.		Yes
109	- Periodic CQI/PMI/RI reporting on PUCCH Mode 1-1, submode 1	- this bit can be set to 1 only if the UE supports PDSCH transmission mode 9 with 8 CSI reference signal ports (i.e., for TDD, if index 104 is set to 1, and for FDD, if *tm9-With-8Tx-FDD-r10* is set to 'supported'). - For UEs capable of TDD-FDD CA, this bit can be set to 1 for both FDD and TDD if either index 104 is set to 1 or *tm9-With-8Tx-FDD-r10* is set to 'supported'.		Yes
110	- Periodic CQI/PMI/RI reporting on PUCCH Mode 1-1, submode 2	- this bit can be set to 1 only if the UE supports PDSCH transmission mode 9 with 8 CSI reference signal ports (i.e., for TDD, if index 104 is set to 1, and for FDD, if *tm9-With-8Tx-FDD-r10* is set to 'supported'). - For UEs capable of TDD-FDD CA, this bit can be set to 1 for both FDD and TDD if either index 104 is set to 1 or *tm9-With-8Tx-FDD-r10* is set to 'supported'.		Yes
111	- Measurement reporting trigger Event A6	- this bit can be set to 1 only if the UE supports carrier aggregation.		Yes

DAINGEAN_0002400

112	- SCell addition within the handover to EUTRA procedure	- this bit can be set to 1 only if the UE supports carrier aggregation and the handover to EUTRA procedure.		Yes
113	- Trigger type 0 SRS (periodic SRS) transmission on X Serving Cells NOTE: X = number of supported component carriers in a given band combination	- this bit can be set to 1 only if the UE supports carrier aggregation in UL.		Yes
114	- Reporting of both UTRA CPICH RSCP and Ec/N0 in a Measurement Report	- this bit can be set to 1 only if index 22 (Table B.1-1) is set to 1.		No
115	- time domain ICIC RLM/RRM measurement subframe restriction for the serving cell - time domain ICIC RRM measurement subframe restriction for neighbour cells - time domain ICIC CSI measurement subframe restriction	- If a category M1 UE does not support this feature group, this bit shall be set to 0.		Yes
116	- Relative transmit phase continuity for spatial multiplexing in UL	- this bit can be set to 1 only if the UE supports two or more layers for spatial multiplexing in UL.		Yes
117	Undefined			
118	Undefined			
119	Undefined			
120	Undefined			
121	Undefined			
122	Undefined			
123	Undefined			
124	Undefined			
125	Undefined			
126	Undefined			
127	Undefined			
128	Undefined			
129	Undefined			
130	Undefined			
131	Undefined			
132	Undefined			

NOTE: The column FDD/ TDD diff indicates if the UE is allowed to signal different values for FDD and TDD. Annex E specifies for which TDD and FDD serving cells a UE supporting TDD/FDD CA shall support a feature for which it indicates support within the FGI signalling.

DAINGEAN_0002401

Annex D (informative): Descriptive background information

D.1 Signalling of Multiple Frequency Band Indicators (Multiple FBI)

D.1.1 Mapping between frequency band indicator and multiple frequency band indicator

This subclause describes the use of the Multiple Frequency Band Indicator (MFBI) lists and the E-UTRA frequency bands in *SystemInformationBlockType1* by means of an example as shown in Figure D.1.1-1. In this example:

- E-UTRAN cell belongs to band B90 and also bands B6, B7, B91, and B92.
- The *freqBandIndicatorPriority* field is not present in *SystemInformationBlockType1*.
- E-UTRAN uses B64 to indicate the presence of B90 in *freqBandIndicator-v9e0*.
- For the MFBI list of this cell, E-UTRAN uses B64 in *MultiBandInfoList* to indicate the position and priority of the bands in *MultiBandInfoList-v9e0*.
- The UE, after reading *SystemInformationBlockType1*, generates an MFBI list with priority of B91, B6, B92, and B7. If the UE supports the frequency band in the *freqBandIndicator-v9e0* IE it applies that frequency band. Otherwise, the UE applies the first listed band in the MFBI list which it supports.

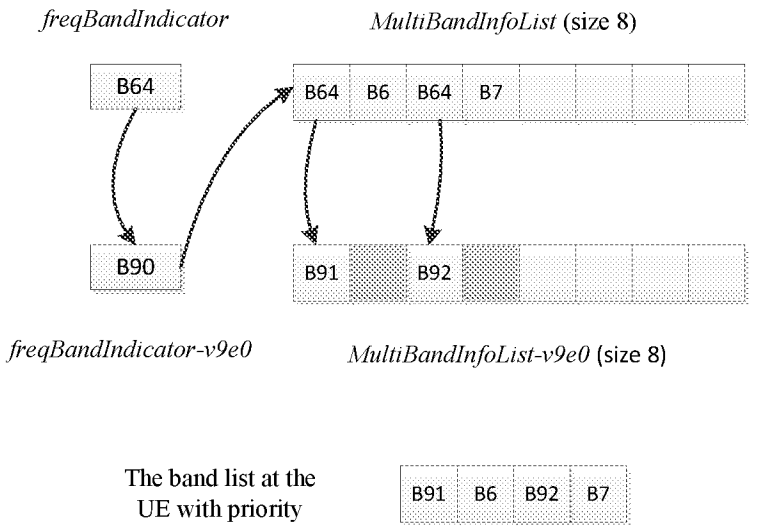


Figure D.1.1-1: Mapping of frequency bands to *MultiBandInfoList/MultiBandInfoList-v9e0*

D.1.2 Mapping between inter-frequency neighbour list and multiple frequency band indicator

This subclause describes the use of the Multiple Frequency Band Indicator (MFBI) lists and the E-UTRA frequencies signalled in *SystemInformationBlockType5* by means of an example as shown in Figure D.1.2-1. In this example:

- E-UTRAN includes 4 frequencies (EARFCNs): the bands associated with f1 and f4 belong to bands lower than 64; the bands associated with f2 and f3 belong to bands larger than 64. The reserved EARFCN value of 65535 is used to indicate the presence of *ARFCN-ValueEUTRA-v9e0*.

DAINGEAN_0002402

- The band associated with f1 has two overlapping bands, B1 and B2 (lower than 64); the band associated with f2 has one overlapping band, B91; the band associated with f3 has four overlapping bands B3, B4, B92, and B93; the band associated with f4 does not have overlapping bands.

- E-UTRAN includes 4 lists in both *interFreqCarrierFreqList-v8h0* and *interFreqCarrierFreqList-v9e0* and ensure the order of the lists is matching. Each list corresponds to one EARFCN and contains up to 8 bands. The first list corresponds to f1, the second list corresponds to f2, and so on. The grey lists mean not including *MultiBandInfoList* or *MultiBandInfoList-v9e0*, i.e. the corresponding EARFCN does not have any overlapping frequency bands in *MultiBandInfoList* or *MultiBandInfoList-v9e0*.

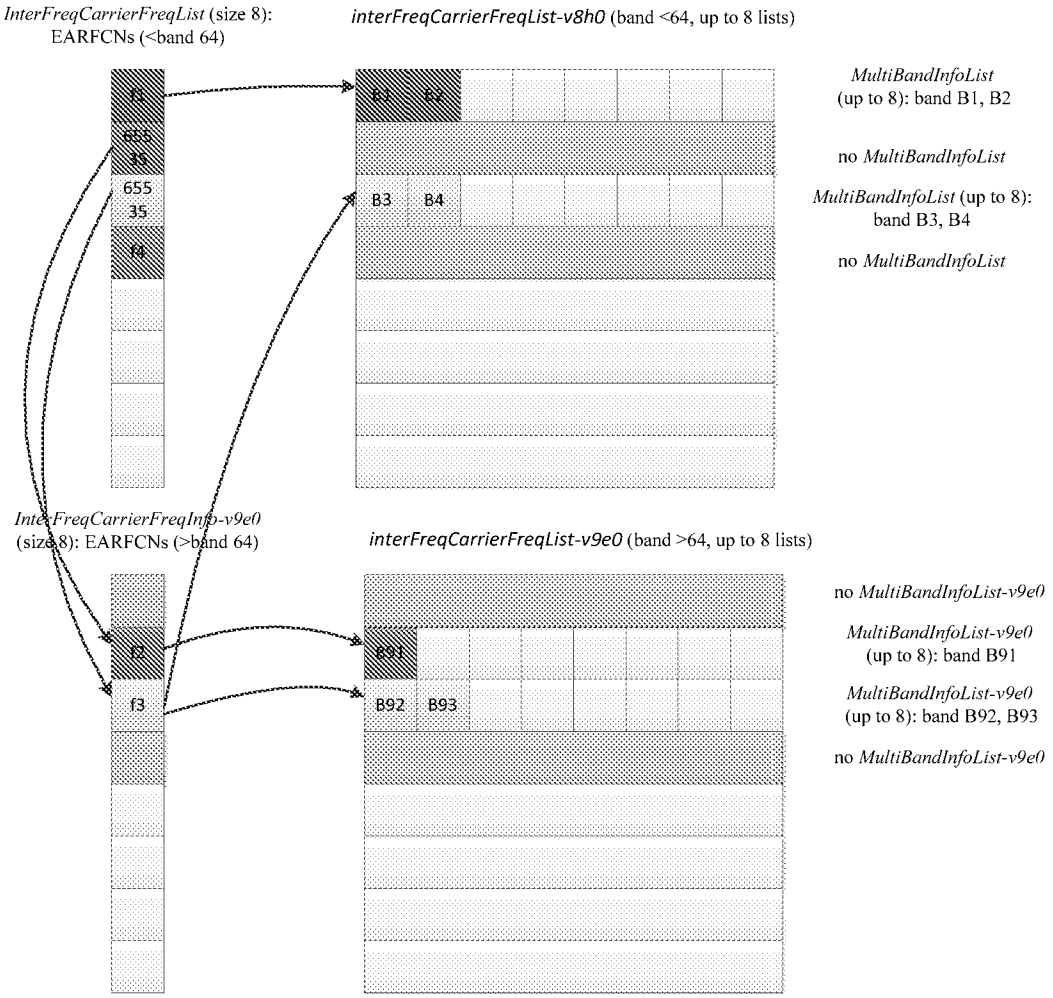


Figure D.1.2-1: Mapping of EARFCNs to MultiBandInfoList/MultiBandInfoList-v9e0

D.1.3 Mapping between UTRA FDD frequency list and multiple frequency band indicator

This subclause describes the use of the Multiple Frequency Band Indicator (MFBI) lists and the UTRA FDD frequencies signalled in *SystemInformationBlockType6* by means of an example as shown in Figure D.1.3-1. In this example:

- E-UTRAN includes 4 UTRA FDD frequencies (UARFCNs).

- The bands associated with f1 and f4 have no overlapping bands. The band associated with f2 has two overlapping bands, B1 and B2. The band associated with f3 has one overlapping band, B3.

- E-UTRAN includes 4 lists in *carrierFreqListUTRA-FDD-v8h0* with the first and fourth entry not including *MultiBandInfoList*.

DAINGEAN_0002403

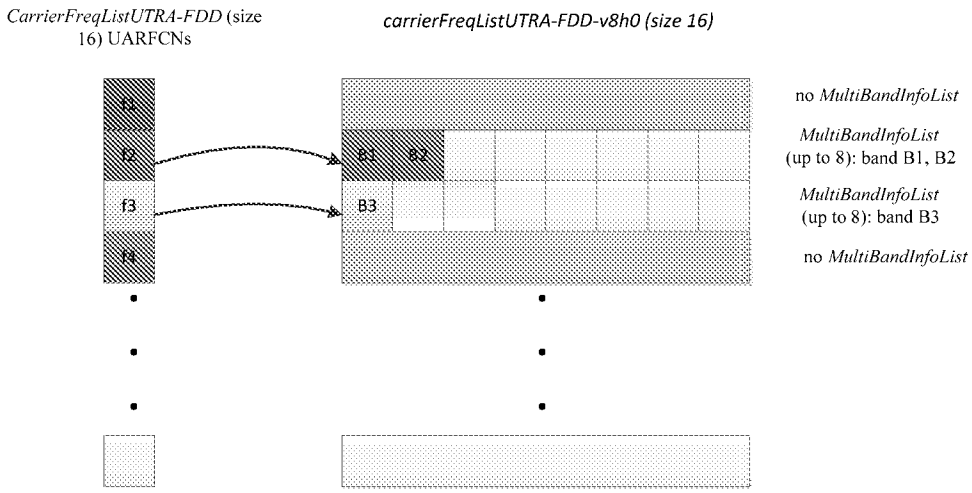


Figure D.1.3-1: Mapping of UARFCNs to *MultiBandInfoList*

DAINGEAN_0002404

Annex E (normative): TDD/FDD differentiation of FGIs/capabilities in TDD-FDD CA

Annex E specifies for which TDD and FDD serving cells a UE supporting TDD/FDD CA shall support a feature/capability for which it indicates support within the FGI/capability signalling.

A UE that indicates support for TDD/ FDD CA:

- For the fields for which the UE is allowed to indicate different support for FDD and TDD, the UE shall support the feature on the PCell and/or SCell(s), as specified in tables E-1, E-2 and E-3 in accordance to the following rules:
  - PCell: the UE shall support the feature for the PCell, if the UE indicates support of the feature for the PCell duplex mode;
  - SCell: the UE shall support the feature for SCell(s), if the UE indicates support of the feature for the SCell duplex mode;
  - Per serving cell: the UE shall support the feature for a serving cell if the UE indicates support of the feature for the serving cell's duplex mode;
  - All serving cells: UE shall support the feature if the UE indicates support of the feature for both TDD and FDD duplex modes;
- For the fields where the UE is not allowed to indicate different support for FDD and TDD, the UE shall support the feature for PCell and SCell(s) if the UE indicates support of the feature via the common FGI/capability bit.

Table E-1: Rel-8/9 FGIs for which FDD/TDD differentiation is allowed (from Annex B)

Index of indicator	Classification
1	Per serving cell
2	All serving cells
4	All serving cells
8	PCell
9	PCell
10	PCell
11	PCell
12	PCell
15	PCell
19	PCell
22	PCell
23	PCell
24	PCell
26	PCell
27	PCell
28	PCell
29	PCell
33	PCell
34	PCell
35	PCell
36	PCell
37	PCell
38	PCell
39	PCell
40	PCell
41	PCell

DAINGEAN_0002405

Table E-2: Rel-10 FGIs for which FDD/TDD differentiation is allowed (from Annex C)

Index of indicator	Classification
102	Per serving cell
103	Per serving cell
105	All serving cells
106	All serving cells
107	All serving cells
108	All serving cells
109	All serving cells
110	All serving cells
111	SCell
112	PCell
113	Per serving cell
115	PCell
116	Per serving cell

Table E-3: Rel-12 UE-EUTRA capabilities for which FDD/TDD differentiation is allowed

UE-EUTRA-Capability	Classification
crossCarrierScheduling	All serving cells
e-CSFB-1XRTT	PCell
e-CSFB-ConcPS-Mob1XRTT	PCell
e-CSFB-dual-1XRTT	PCell
ePDCCH	Per serving cell
e-RedirectionUTRA	PCell
e-RedirectionUTRA-TDD	PCell
inDeviceCoexInd	All serving cells
interFreqRSTD-Measurement	PCell
interFreqSI-AcquisitionForHO	PCell
interRAT-PS-HO-ToGERAN	PCell
intraFreqSI-AcquisitionForHO	PCell
mbms-Scell	SCell
mbms-NonServingCell	SCell
multiACK-CSIreporting	PCell
multiClusterPUSCH-WithinCC	Per serving cell
otdoa-UE-Assisted	PCell
pmi-Disabling	Per serving cell
rsrqMeasWideband	Per serving cell
simultaneousPUCCH-PUSCH	All serving cells
ss-CCH-InterfHandl	PCell
txDiv-PUCCH1b-ChSelect	PCell
ue-TxAntennaSelectionSupported	Per serving cell
utran-SI-AcquisitionForHO	PCell

Annex F (informative): Change history

DAINGEAN_0002406

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
12/2007	RP-38	RP-070920	-		Approved at TSG-RAN #38 and placed under Change Control	1.0.0	8.0.0
03/2008	RP-39	RP-080163	0001	4	CR to 36.331 with Miscellaneous corrections	8.0.0	8.1.0
03/2008	RP-39	RP-080164	0002	2	CR to 36.331 to convert RRC to agreed ASN.1 format	8.0.0	8.1.0
05/2008	RP-40	RP-080361	0003	1	CR to 36.331 on Miscellaneous clarifications/ corrections	8.1.0	8.2.0
09/2008	RP-41	RP-080693	0005	-	CR on Miscellaneous corrections and clarifications	8.2.0	8.3.0
12/2008	RP-42	RP-081021	0006	-	Miscellaneous corrections and clarifications	8.3.0	8.4.0
03/2009	RP-43	RP-090131	0007	-	Correction to the Counter Check procedure	8.4.0	8.5.0
	RP-43	RP-090131	0008	-	CR to 36.331-UE Actions on Receiving SIB11	8.4.0	8.5.0
	RP-43	RP-090131	0009	1	Spare usage on BCCH	8.4.0	8.5.0
	RP-43	RP-090131	0010	-	Issues in handling optional IE upon absence in GERAN NCL	8.4.0	8.5.0
	RP-43	RP-090131	0011	-	CR to 36.331 on Removal of useless RLC re-establishment at RB release	8.4.0	8.5.0
	RP-43	RP-090131	0012	1	Clarification to RRC level padding at PCCH and BCCH	8.4.0	8.5.0
	RP-43	RP-090131	0013	-	Removal of Inter-RAT message	8.4.0	8.5.0
	RP-43	RP-090131	0014	-	Padding of the SRB-ID for security input	8.4.0	8.5.0
	RP-43	RP-090131	0015	-	Validity of ETWS SIB	8.4.0	8.5.0
	RP-43	RP-090131	0016	1	Configuration of the Two-Intervals-SPS	8.4.0	8.5.0
	RP-43	RP-090131	0017	-	Corrections on Scaling Factor Values of Qhyst	8.4.0	8.5.0
	RP-43	RP-090131	0018	1	Optionality of srsMaxUppts	8.4.0	8.5.0
	RP-43	RP-090131	0019	-	CR for discussion on field name for common and dedicated IE	8.4.0	8.5.0
	RP-43	RP-090131	0020	-	Corrections to Connected mode mobility	8.4.0	8.5.0
	RP-43	RP-090131	0021	-	Clarification regarding the measurement reporting procedure	8.4.0	8.5.0
	RP-43	RP-090131	0022	1	Corrections on s-Measure	8.4.0	8.5.0
	RP-43	RP-090131	0023	1	R1 of CR0023 (R2-091029) on combination of SPS and TTI bundling for TDD	8.4.0	8.5.0
	RP-43	RP-090131	0024	-	L3 filtering for path loss measurements	8.4.0	8.5.0
	RP-43	RP-090131	0025	1	S-measure handling for reportCGI	8.4.0	8.5.0
	RP-43	RP-090131	0026	1	Measurement configuration clean up	8.4.0	8.5.0
	RP-43	RP-090131	0027	-	Alignment of measurement quantities for UTRA	8.4.0	8.5.0
	RP-43	RP-090131	0028	-	CR to 36.331 on L1 parameters ranges alignment	8.4.0	8.5.0
	RP-43	RP-090131	0029	-	Default configuration for transmissionMode	8.4.0	8.5.0
	RP-43	RP-090131	0030	-	CR to 36.331 on RRC Parameters for MAC, RLC and PDCP	8.4.0	8.5.0
	RP-43	RP-090131	0031	1	CR to 36.331 - Clarification on Configured PRACH Freq Offset	8.4.0	8.5.0
	RP-43	RP-090131	0032	-	Clarification on TTI bundling configuration	8.4.0	8.5.0
	RP-43	RP-090131	0033	1	Update of R2-091039 on Inter-RAT UE Capability	8.4.0	8.5.0
	RP-43	RP-090133	0034	-	Feature Group Support Indicators	8.4.0	8.5.0
	RP-43	RP-090131	0036	-	Corrections to RLF detection	8.4.0	8.5.0
	RP-43	RP-090131	0037	-	Indication of Dedicated Priority	8.4.0	8.5.0
	RP-43	RP-090131	0038	2	Security Clean up	8.4.0	8.5.0
	RP-43	RP-090131	0039	-	Correction of TTT value range	8.4.0	8.5.0
	RP-43	RP-090131	0040	-	Correction on CDMA measurement result IE	8.4.0	8.5.0
	RP-43	RP-090131	0041	1	Clarification of Measurement Reporting	8.4.0	8.5.0
	RP-43	RP-090131	0042	-	Spare values in DL and UL Bandwidth in MIB and SIB2	8.4.0	8.5.0
	RP-43	RP-090131	0044	1	Clarifications to System Information Block Type 8	8.4.0	8.5.0
	RP-43	RP-090131	0045	-	Reception of ETWS secondary notification	8.4.0	8.5.0
	RP-43	RP-090131	0046	1	Validity time for ETWS message Id and Sequence No	8.4.0	8.5.0
	RP-43	RP-090131	0047	-	CR for Timers and constants values used during handover to E-UTRA	8.4.0	8.5.0
	RP-43	RP-090131	0048	-	Inter-RAT Security Clarification	8.4.0	8.5.0
	RP-43	RP-090131	0049	-	CR to 36.331 on consistent naming of 1xRTT identifiers	8.4.0	8.5.0
	RP-43	RP-090131	0050	-	Capturing RRC behavior regarding NAS local release	8.4.0	8.5.0
	RP-43	RP-090131	0051	-	Report CGI before T321 expiry and UE null reporting	8.4.0	8.5.0
	RP-43	RP-090131	0052	-	System Information and 3 hour validity	8.4.0	8.5.0
	RP-43	RP-090131	0053	1	Inter-Node AS Signalling	8.4.0	8.5.0
	RP-43	RP-090131	0054	-	Set of values for the parameter "messagePowerOffsetGroupB"	8.4.0	8.5.0
	RP-43	RP-090131	0055	-	CR to paging reception for ETWS capable UEs in RRC_CONNECTED	8.4.0	8.5.0
	RP-43	RP-090131	0056	1	CR for CSG related items in 36.331	8.4.0	8.5.0
	RP-43	RP-090131	0057	1	SRS common configuration	8.4.0	8.5.0
	RP-43	RP-090131	0058	-	RRC processing delay	8.4.0	8.5.0
	RP-43	RP-090131	0059	-	CR for HNB Name	8.4.0	8.5.0
	RP-43	RP-090131	0060	3	Handover to EUTRA delta configuration	8.4.0	8.5.0
	RP-43	RP-090131	0063	-	Delivery of Message Identifier and Serial Number to upper layers for ETWS	8.4.0	8.5.0
	RP-43	RP-090131	0066	-	Clarification on the maximum size of cell lists	8.4.0	8.5.0
	RP-43	RP-090131	0067	-	Missing RRC messages in 'Protection of RRC messages'	8.4.0	8.5.0
	RP-43	RP-090131	0069	1	Clarification on NAS Security Container	8.4.0	8.5.0
	RP-43	RP-090131	0071	-	Extension of range of CQI/PMI configuration index	8.4.0	8.5.0
	RP-43	RP-090131	0072	1	Access barring alleviation in RRC connection establishment	8.4.0	8.5.0
	RP-43	RP-090367	0077	6	Corrections to feature group support indicators	8.4.0	8.5.0
	RP-43	RP-090131	0078	-	CR from email discussion to capture DRX and TTT handling	8.4.0	8.5.0

DAINGEAN_0002407

	RP-43	RP-090131	0079	1	Need Code handling on BCCH messages	8.4.0	8.5.0
	RP-43	RP-090131	0080	-	Unification of T300 and T301 and removal of miscallaneous FFSs	8.4.0	8.5.0
	RP-43	RP-090131	0084	1	Proposed CR modifying the code-point definitions of neighbourCellConfiguration	8.4.0	8.5.0
	RP-43	RP-090131	0087	2	Remove Redundant Optionality in SIB8	8.4.0	8.5.0
	RP-43	RP-090131	0089	-	Corrections to the generic error handling	8.4.0	8.5.0
	RP-43	RP-090131	0090	-	Configurability of T301	8.4.0	8.5.0
	RP-43	RP-090131	0091	1	Correction related to TTT	8.4.0	8.5.0
	RP-43	RP-090131	0095	-	CR for 36.331 on SPS-config	8.4.0	8.5.0
	RP-43	RP-090131	0096	2	CR for Deactivation of periodical measurement	8.4.0	8.5.0
	RP-43	RP-090131	0099	2	SMC and reconfiguration	8.4.0	8.5.0
	RP-43	RP-090131	0101	-	TDD handover	8.4.0	8.5.0
	RP-43	RP-090131	0102	-	Corrections to system information acquisition	8.4.0	8.5.0
	RP-43	RP-090131	0106	-	Some Corrections and Clarifications to 36.331	8.4.0	8.5.0
	RP-43	RP-090131	0109	-	Clarification on the Maximum number of ROHC context sessions parameter	8.4.0	8.5.0
	RP-43	RP-090131	0110	-	Transmission of rrm-Config at Inter-RAT Handover	8.4.0	8.5.0
	RP-43	RP-090131	0111	1	Use of SameRefSignalsInNeighbor parameter	8.4.0	8.5.0
	RP-43	RP-090131	0112	-	Default serving cell offset for measurement event A3	8.4.0	8.5.0
	RP-43	RP-090131	0114	-	dl-EARFCN missing in HandoverPreparationInformation	8.4.0	8.5.0
	RP-43	RP-090131	0115	-	Cleanup of references to 36.101	8.4.0	8.5.0
	RP-43	RP-090131	0117	-	Correction to the value range of UE-Categories	8.4.0	8.5.0
	RP-43	RP-090131	0122	1	Correction on RRC connection re-establishment	8.4.0	8.5.0
	RP-43	RP-090131	0124	-	Performing Measurements to report CGI for CDMA2000	8.4.0	8.5.0
	RP-43	RP-090131	0125	-	CDMA2000-SystemTimeInfo in VarMeasurementConfiguration	8.4.0	8.5.0
	RP-43	RP-090131	0126	-	UE Capability Information for CDMA2000 1xRTT	8.4.0	8.5.0
	RP-43	RP-090131	0127	-	CDMA2000 related editorial changes	8.4.0	8.5.0
	RP-43	RP-090131	0128	-	Draft CR to 36.331 on State mismatch recovery at re-establishment	8.4.0	8.5.0
	RP-43	RP-090131	0129	1	Draft CR to 36.331 on Renaming of AC barring related IEs	8.4.0	8.5.0
	RP-43	RP-090131	0130	2	Draft CR to 36.331 on Inheriting of dedicated priorities at inter-RAT reselection	8.4.0	8.5.0
	RP-43	RP-090131	0135	-	Proposed CR to 36.331 Description alignment for paging parameter, nB	8.4.0	8.5.0
	RP-43	RP-090131	0139	2	Miscellaneous corrections and clarifications resulting from ASN.1 review	8.4.0	8.5.0
	RP-43	RP-090131	0141	1	Correction regarding Redirection Information fo GERAN	8.4.0	8.5.0
	RP-43	RP-090131	0142	-	Further ASN.1 review related issues	8.4.0	8.5.0
	RP-43	RP-090131	0143	-	Periodic measurements	8.4.0	8.5.0
	RP-43	RP-090131	0144	1	Further analysis on code point "OFF" for ri-ConfigIndex	8.4.0	8.5.0
	RP-43	RP-090131	0145	1	Adding and deleting same measurement or configuration in one message	8.4.0	8.5.0
	RP-43	RP-090131	0147	-	Corrections to IE dataCodingScheme in SIB11	8.4.0	8.5.0
	RP-43	RP-090131	0148	-	Clarification on Mobility from E-UTRA	8.4.0	8.5.0
	RP-43	RP-090131	0149	-	36.331 CR related to “not applicable”	8.4.0	8.5.0
	RP-43	RP-090131	0150	1	UE radio capability transfer	8.4.0	8.5.0
	RP-43	RP-090131	0151	-	CR to 36.331 on value of CDMA band classes	8.4.0	8.5.0
	RP-43	RP-090131	0152	-	Corrections to DRB modification	8.4.0	8.5.0
	RP-43	RP-090131	0153	-	Correction to presence condition for pdcp-config	8.4.0	8.5.0
	RP-43	RP-090131	0155	-	TDD HARQ-ACK feedback mode	8.4.0	8.5.0
	RP-43	RP-090275	0157	-	Corrections regarding use of carrierFreq for CDMA (SIB8) and GERAN (measObject)	8.4.0	8.5.0
	RP-43	RP-090321	0156	1	Sending of GERAN SI/PSI information at Inter-RAT Handover	8.4.0	8.5.0
	RP-43	RP-090339	0158	-	Clarification of CSG support	8.4.0	8.5.0
06/2009	RP-44	RP-090516	0159	-	Octet alignment of VarShortMAC-Input	8.5.0	8.6.0
	RP-44	RP-090516	0160	3	Minor corrections to the feature grouping	8.5.0	8.6.0
	RP-44	RP-090516	0161	-	Security clarification	8.5.0	8.6.0
	RP-44	RP-090516	0162	1	Sending of GERAN SI/PSI information at Inter-RAT Handover	8.5.0	8.6.0
	RP-44	RP-090516	0163	1	Correction of UE measurement model	8.5.0	8.6.0
	RP-44	RP-090516	0164	-	Restricting the reconfiguration of UM RLC SN field size	8.5.0	8.6.0
	RP-44	RP-090516	0165	1	36.331 CR on Clarification on cell change order from GERAN to E-UTRAN	8.5.0	8.6.0
	RP-44	RP-090516	0166	-	36.331 CR - Handling of expired TAT and failed D-SR	8.5.0	8.6.0
	RP-44	RP-090516	0167	1	Proposed CR to 36.331 Clarification on mandatory information in AS-Config	8.5.0	8.6.0
	RP-44	RP-090516	0168	2	Miscellaneous small corrections	8.5.0	8.6.0
	RP-44	RP-090516	0173	-	Clarification on the basis of delta signalling	8.5.0	8.6.0
	RP-44	RP-090516	0177	-	CR on Alignment of CCCH and DCCH handling of missing mandatory field	8.5.0	8.6.0
	RP-44	RP-090516	0180	2	Handling of Measurement Context During HO Preparation	8.5.0	8.6.0
	RP-44	RP-090516	0181	-	Clarification of key-eNodeB-Star in AdditionalReestabInfo	8.5.0	8.6.0
	RP-44	RP-090516	0182	1	UE Capability Transfer	8.5.0	8.6.0
	RP-44	RP-090516	0186	1	Clarification regarding mobility from E-UTRA in-between SMC and SRB2/DRB setup	8.5.0	8.6.0
	RP-44	RP-090516	0188	1	Correction and completion of specification conventions	8.5.0	8.6.0

DAINGEAN_0002408

	RP-44	RP-090516	0195	2	RB combination in feature group indicator	8.5.0	8.6.0
	RP-44	RP-090516	0196	1	CR for need code for fields in mobilityControlInfo	8.5.0	8.6.0
	RP-44	RP-090497	0197	-	Alignment of pusch-HoppingOffset with 36.211	8.5.0	8.6.0
	RP-44	RP-090570	0198	-	Explicit srb-Identity values for SRB1 and SRB2	8.5.0	8.6.0
	RP-44	RP-090516	0199	-	Removing use of *defaultValue* for *mac-MainConfig*	8.5.0	8.6.0
09/2009	RP-45	RP-090906	0200	-	Proposed update of the feature grouping	8.6.0	8.7.0
	RP-45	RP-090906	0201	-	Clarification on measurement object configuration for serving frequency	8.6.0	8.7.0
	RP-45	RP-090906	0202	-	Correction regarding SRVCC	8.6.0	8.7.0
	RP-45	RP-090906	0203	-	Indication of DRB Release during HO	8.6.0	8.7.0
	RP-45	RP-090906	0204	1	Correction regarding application of dedicated resource configuration upon handover	8.6.0	8.7.0
	RP-45	RP-090906	0205	-	REL-9 protocol extensions in RRC	8.6.0	8.7.0
	RP-45	RP-090906	0206	-	In-order delivery of NAS PDUs at RRC connection reconfiguration	8.6.0	8.7.0
	RP-45	RP-090906	0207	-	Correction on Threshold of Measurement Event	8.6.0	8.7.0
	RP-45	RP-090906	0210	-	Clarification on dedicated resource of RA procedure	8.6.0	8.7.0
	RP-45	RP-090906	0213	1	Cell barring when MasterInformationBlock or SystemInformationBlock1 is missing	8.6.0	8.7.0
	RP-45	RP-090915	0218	-	Security threat with duplicate detection for ETWS	8.6.0	8.7.0
	RP-45	RP-090906	0224	-	Clarification on supported handover types in feature grouping	8.6.0	8.7.0
	RP-45	RP-090906	0250	1	Handling of unsupported / non-comprehended frequency band and emission requirement	8.6.0	8.7.0
	RP-45	RP-090906	0251	-	RB combinations in feature group indicator 20	8.6.0	8.7.0
09/2009	RP-45	RP-090934	0220	1	Introduction of Per-QCI radio link failure timers (option 1)	8.7.0	9.0.0
	RP-45	RP-090926	0222	-	Null integrity protection algorithm	8.7.0	9.0.0
	RP-45	RP-090926	0223	-	Emergency Support Indicator in BCCH	8.70	9.0.0
	RP-45	RP-090934	0230	2	CR to 36.331 for Enhanced CSFB to 1xRTT with concurrent PS handover	8.7.0	9.0.0
	RP-45	RP-090934	0243	-	REL-9 on Miscellaneous editorial corrections	8.7.0	9.0.0
	RP-45	RP-090934	0247	-	Periodic CQI/PMI/RI masking	8.7.0	9.0.0
	RP-45	RP-090933	0252	-	Introduction of CMAS	8.7.0	9.0.0
12/2009	RP-46	RP-091346	0253	1	(Rel-9)-clarification on the description of redirectedCarrierInfo	9.0.0	9.1.0
	RP-46	RP-091346	0254	1	Adding references to RRC processing delay for inter-RAT mobiltiy messages	9.0.0	9.1.0
	RP-46	RP-091314	0256	-	Alignment of srs-Bandwidth with 36.211	9.0.0	9.1.0
	RP-46	RP-091341	0257	5	Baseline CR capturing eMBMS agreements	9.0.0	9.1.0
	RP-46	RP-091343	0258	3	Capturing agreements on inbound mobility	9.0.0	9.1.0
	RP-46	RP-091314	0260	-	Clarification of preRegistrationZoneID/secondaryPreRegistrationZoneID	9.0.0	9.1.0
	RP-46	RP-091346	0261	-	Clarification on NCC for IRAT HO	9.0.0	9.1.0
	RP-46	RP-091314	0263	-	Clarification on P-max	9.0.0	9.1.0
	RP-46	RP-091314	0265	1	Clarification on the definition of maxCellMeas	9.0.0	9.1.0
	RP-46	RP-091346	0266	-	Correction of q-RxLevMin reference in SIB7	9.0.0	9.1.0
	RP-46	RP-091346	0267	-	Correction on SPS-Config field descriptions	9.0.0	9.1.0
	RP-46	RP-091346	0268	1	correction on the definition of CellsTriggeredList	9.0.0	9.1.0
	RP-46	RP-091345	0269	-	Correction relating to CMAS UE capability	9.0.0	9.1.0
	RP-46	RP-091314	0271	1	Feature grouping bit for SRVCC handover	9.0.0	9.1.0
	RP-46	RP-091314	0272	1	Correction and completion of extension guidelines	9.0.0	9.1.0
	RP-46	RP-091344	0273	-	RACH optimization Stage-3	9.0.0	9.1.0
	RP-46	RP-091345	0274	-	Stage 3 correction for CMAS	9.0.0	9.1.0
	RP-46	RP-091346	0276	1	SR prohibit mechanism for UL SPS	9.0.0	9.1.0
	RP-46	RP-091346	0277	-	Parameters used for enhanced 1xRTT CS fallback	9.0.0	9.1.0
	RP-46	RP-091346	0281	-	Correction on UTRAN UE Capability transfer	9.0.0	9.1.0
	RP-46	RP-091346	0285	-	Maximum number of CDMA2000 neighbors in SIB8	9.0.0	9.1.0
	RP-46	RP-091340	0288	1	Introduction of UE Rx-Tx Time Difference measurement	9.0.0	9.1.0
	RP-46	RP-091346	0297	-	Introduction of SR prohibit timer	9.0.0	9.1.0
	RP-46	RP-091346	0298	-	Remove FFSs from RAN2 specifications	9.0.0	9.1.0
	RP-46	RP-091343	0301	1	Renaming Allowed CSG List (36.331 Rel-9)	9.0.0	9.1.0
	RP-46	RP-091346	0305	-	Re-introduction of message segment discard time	9.0.0	9.1.0
	RP-46	RP-091346	0306	1	Application of ASN.1 extension guidelines	9.0.0	9.1.0
	RP-46	RP-091346	0309	1	Support for Dual Radio 1xCSFB	9.0.0	9.1.0
	RP-46	RP-091346	0311	-	Shorter SR periodicity	9.0.0	9.1.0
	RP-46	RP-091342	0316	-	CR to 36.331 for Introduction of Dual Layer Transmission	9.0.0	9.1.0
	RP-46	RP-091343	0318	1	Draft CR to 36.331 on Network ordered SI reporting	9.0.0	9.1.0
	RP-46	RP-091346	0322	-	UE e1xcsfb capabilities correction	9.0.0	9.1.0
	RP-46	RP-091331	0327	1	Clarification on coding of ETWS related IEs	9.0.0	9.1.0
03/2010	RP-47	RP-100285	0331	-	Clarification of CGI reporting	9.1.0	9.2.0
	RP-47	RP-100305	0332	-	Clarification on MCCH change notification	9.1.0	9.2.0
	RP-47	RP-100308	0333	-	Clarification on measurement for serving cell only	9.1.0	9.2.0
	RP-47	RP-100306	0334	-	Clarification on proximity indication configuraiton in handover to E-UTRA	9.1.0	9.2.0
	RP-47	RP-100308	0335	-	Clarification on radio resource configuration in handover to E-UTRA procedure	9.1.0	9.2.0
	RP-47	RP-100308	0336	-	Clarification on UE maximum transmission power	9.1.0	9.2.0

DAINGEAN_0002409

	RP-47	RP-100308	0337	-	Correction to field descriptions of UE-EUTRA-Capability	9.1.0	9.2.0
	RP-47	RP-100305	0338	-	Correction to MBMS scheduling terminology	9.1.0	9.2.0
	RP-47	RP-100308	0339	-	Corrections to SIB8	9.1.0	9.2.0
	RP-47	RP-100306	0340	-	CR 36.331 R9 for Unifying SI reading for ANR and inbound mobility	9.1.0	9.2.0
	RP-47	RP-100308	0341	1	CR to 36.331 for 1xRTT pre-registration information in SIB8	9.1.0	9.2.0
	RP-47	RP-100305	0342	-	CR to 36.331 on corrections for MBMS	9.1.0	9.2.0
	RP-47	RP-100306	0343	1	CR to 36.331 on CSG identity reporting	9.1.0	9.2.0
	RP-47	RP-100308	0344	2	CR to 36.331 on Optionality of Rel-9 UE features	9.1.0	9.2.0
	RP-47	RP-100308	0345	1	CR to 36.331 on Service Specific Acces Control (SSAC)	9.1.0	9.2.0
	RP-47	RP-100308	0346	-	Introduction of power-limited device indication in UE capability.	9.1.0	9.2.0
	RP-47	RP-100305	0347	-	Missing agreement in MCCH change notification.	9.1.0	9.2.0
	RP-47	RP-100305	0348	1	Corrections related to MCCH change notification and value ranges	9.1.0	9.2.0
	RP-47	RP-100306	0349	2	Prohibit timer for proximity indication	9.1.0	9.2.0
	RP-47	RP-100306	0350	1	Proximity Indication after handover and re-establishment	9.1.0	9.2.0
	RP-47	RP-100305	0351	-	Specifying the exact mapping of notificationIndicator in SIB13 to PDCCH bits	9.1.0	9.2.0
	RP-47	RP-100308	0352	-	Corrections out of ASN.1 review scope	9.1.0	9.2.0
	RP-47	RP-100308	0353	-	CR on clarification of system information change	9.1.0	9.2.0
	RP-47	RP-100285	0358	-	Measurement Result CDMA2000 Cell	9.1.0	9.2.0
	RP-47	RP-100304	0361	-	Correction on the range of UE Rx-Tx time difference measurement result	9.1.0	9.2.0
	RP-47	RP-100305	0362	-	Small clarifications regarding MBMS	9.1.0	9.2.0
	RP-47	RP-100308	0363	-	Introduction of REL-9 indication within field accessStratumRelease	9.1.0	9.2.0
	RP-47	RP-100306	0364	-	Extending mobility description to cover inbound mobility	9.1.0	9.2.0
	RP-47	RP-100308	0365	1	Clarification regarding enhanced CSFB to 1XRTT	9.1.0	9.2.0
	RP-47	RP-100308	0368	-	Handling of dedicated RLF timers	9.1.0	9.2.0
	RP-47	RP-100305	0370	1	Clarification on UE's behavior of receiving MBMS service	9.1.0	9.2.0
	RP-47	RP-100305	0371	-	MBMS Service ID and Session ID	9.1.0	9.2.0
	RP-47	RP-100305	0372	1	Inclusion of non-MBSFN region length in SIB13	9.1.0	9.2.0
	RP-47	RP-100309	0374	1	CR to 36.331 for e1xCSFB access class barring parameters in SIB8	9.1.0	9.2.0
	RP-47	RP-100308	0375	-	Multiple 1xRTT/HRPD target cells in MobilityFromEUTRACommand	9.1.0	9.2.0
	RP-47	RP-100308	0376	-	Independent support indicators for Dual-Rx CSFB and S102 in SIB8	9.1.0	9.2.0
	RP-47	RP-100285	0378	-	Clarification on DRX StartOffset for TDD	9.1.0	9.2.0
	RP-47	RP-100308	0379	1	Miscellaneous corrections from REL-9 ASN.1 review	9.1.0	9.2.0
	RP-47	RP-100308	0381	-	Need codes and missing conventions	9.1.0	9.2.0
	RP-47	RP-100308	0383	1	Introduction of Full Configuration Handover for handling earlier eNB releases	9.1.0	9.2.0
	RP-47	RP-100308	0385	-	Clarification to SFN reference in RRC	9.1.0	9.2.0
	RP-47	RP-100308	0390	-	RSRP and RSRQ based Thresholds	9.1.0	9.2.0
	RP-47	RP-100189	0392	3	Redirection enhancements to GERAN	9.1.0	9.2.0
	RP-47	RP-100308	0398	-	Cell reselection enhancements CR for 36.331	9.1.0	9.2.0
	RP-47	RP-100307	0401	3	CR on UE-originated RLFreporting for MRO SON use case	9.1.0	9.2.0
	RP-47	RP-100309	0402	3	CR to 36.331 on Redirection enhancements to UTRAN	9.1.0	9.2.0
	RP-47	RP-100306	0403	2	Proximity status indication handling at mobility	9.1.0	9.2.0
	RP-47	RP-100305	0404	-	Upper layer aspect of MBSFN area id	9.1.0	9.2.0
	RP-47	RP-100308	0405	-	Redirection for enhanced 1xRTT CS fallback with concurrent PSHO	9.1.0	9.2.0
	RP-47	RP-100301	0406	-	Avoiding interleaving transmission of CMAS notifications	9.1.0	9.2.0
	RP-47	RP-100308	0407	1	Introduction of UE GERAN DTM capability indicator	9.1.0	9.2.0
	RP-47	RP-100381	0408	2	Introducing provisions for late ASN.1 corrections	9.1.0	9.2.0
	RP-47	RP-100245	0411	-	Correction/ alignment of REL-9 UE capability signalling	9.1.0	9.2.0
06/2010	RP-48	RP-100553	0412	-	Clarification for mapping between warning message and CB-data	9.2.0	9.3.0
	RP-48	RP-100556	0413	-	Clarification of radio link failure related actions	9.2.0	9.3.0
	RP-48	RP-100554	0414	-	Clarification on UE actions upon leaving RRC_CONNECTED	9.2.0	9.3.0
	RP-48	RP-100553	0415	-	Correction on CMAS system information	9.2.0	9.3.0
	RP-48	RP-100554	0416	1	Corrections to MBMS	9.2.0	9.3.0
	RP-48	RP-100536	0418	-	Decoding of unknown future extensions	9.2.0	9.3.0
	RP-48	RP-100556	0419	1	Miscellaneous small corrections and clarifications	9.2.0	9.3.0
	RP-48	RP-100551	0420	-	Prohibit timer for proximity indication	9.2.0	9.3.0
	RP-48	RP-100556	0421	-	RLF report for MRO correction	9.2.0	9.3.0
	RP-48	RP-100546	0423	1	Missing UTRA bands in IRAT-ParametersUTRA-FDD	9.2.0	9.3.0
	RP-48	RP-100556	0424	-	Correction on handling of dedicated RLF timers	9.2.0	9.3.0
	RP-48	RP-100556	0431	1	Protection of RRC messages	9.2.0	9.3.0
	RP-48	RP-100556	0433	-	Handling missing Essential system information	9.2.0	9.3.0
	RP-48	RP-100551	0434	1	Clarification on UMTS CSG detected cell reporting in LTE	9.2.0	9.3.0
	RP-48	RP-100556	0436	-	Introducing provisions for late corrections	9.2.0	9.3.0
	RP-48	RP-100556	0437	-	Clarification regarding / alignment of REL-9 UE capabilities	9.2.0	9.3.0
09/2010	RP-49	RP-100845	0440	-	Correction to 3GPP2 reference for interworking with cdma2000 1x	9.3.0	9.4.0
	RP-49	RP-100851	0441	-	Clarification on UL handover preparation transfer	9.3.0	9.4.0
	RP-49	RP-100851	0442	1	Clarifications regarding fullConfiguration	9.3.0	9.4.0

DAINGEAN_0002410

	RP-49	RP-100851	0443	-	Clarifications regarding handover to E-UTRAN	9.3.0	9.4.0
	RP-49	RP-100854	0444	-	Correction on the table of conditionally mandatory Release 9 features	9.3.0	9.4.0
	RP-49	RP-100851	0445	-	Corrections to TS36.331 on MeasConfig IE	9.3.0	9.4.0
	RP-49	RP-100853	0446	2	CR to 36.331 on clarification for MBMS PTM RBs	9.3.0	9.4.0
	RP-49	RP-100851	0447	-	Introduction of late corrections container for E-UTRA UE capabilities	9.3.0	9.4.0
	RP-49	RP-100851	0448	-	Renaming of containers for late non-critical extensions	9.3.0	9.4.0
	RP-49	RP-100851	0452	-	Clarifications Regarding Redirection from LTE	9.3.0	9.4.0
	RP-49	RP-100845	0456	-	Description of multi-user MIMO functionality in feature group indicator table	9.3.0	9.4.0
	RP-49	RP-100845	0458	-	Correct the PEMAX_H to PEMAX	9.3.0	9.4.0
	RP-49	RP-100851	0460	-	Clarification for feature group indicator bit 11	9.3.0	9.4.0
	RP-49	RP-100851	0465	1	Clarification of FGI setting for inter-RAT features not supported by the UE	9.3.0	9.4.0
	RP-49	RP-101008	0475	1	FGI settings in Rel-9	9.3.0	9.4.0
12/2010	RP-50	RP-101197	0483	-	Clarification on Meaning of FGI Bits	9.4.0	9.5.0
	RP-50	RP-101197	0485	-	Clarification regarding reconfiguration of the quantityConfig	9.4.0	9.5.0
	RP-50	RP-101210	0486	1	Corrections to the presence of IE regarding DRX and CQI	9.4.0	9.5.0
	RP-50	RP-101210	0493	-	The field descriptions of MeasObjectEUTRA	9.4.0	9.5.0
	RP-50	RP-101197	0498	1	Clarification of FGI settings non ANR periodical measurement reporting	9.4.0	9.5.0
	RP-50	RP-101209	0500	-	Corrections to RLF Report	9.4.0	9.5.0
	RP-50	RP-101206	0519	1	T321 timer fix	9.4.0	9.5.0
	RP-50	RP-101197	0524	-	Restriction of AC barring parameter setting	9.4.0	9.5.0
	RP-50	RP-101210	0525	-	Removal of SEQUENCE OF SEQUENCE in UEInformationResponse	9.4.0	9.5.0
	RP-50	RP-101197	0526	1	Clarification regarding default configuration value N/A	9.4.0	9.5.0
	RP-50	RP-101431	0532	-	Splitting FGI bit 3	9.4.0	9.5.0
	RP-50	RP-101183	0476	4	36.331 CR on Introduction of Minimization of Drive Tests	9.4.0	10.0.0
	RP-50	RP-101293	0477	4	AC-Barring for Mobile Originating CSFB call	9.4.0	10.0.0
	RP-50	RP-101214	0478	-	Addition of UE-EUTRA-Capability descriptions	9.4.0	10.0.0
	RP-50	RP-101214	0481	-	Clarification on Default Configuration for CQI-ReportConfig	9.4.0	10.0.0
	RP-50	RP-101215	0487	-	CR to 36.331 adding e1xCSFB support for dual Rx/Tx UE	9.4.0	10.0.0
	RP-50	RP-101227	0488	1	Introduction of Carrier Aggregation and UL/ DL MIMO	9.4.0	10.0.0
	RP-50	RP-101228	0489	1	Introduction of relays in RRC	9.4.0	10.0.0
	RP-50	RP-101214	0490	1	Priority indication for CSFB with re-direction	9.4.0	10.0.0
	RP-50	RP-101214	0491	-	SIB Size Limitations	9.4.0	10.0.0
	RP-50	RP-101214	0513	-	Combined Quantity Report for IRAT measurement of UTRAN	9.4.0	10.0.0
	RP-50	RP-101214	0527	1	UE power saving and Local release	9.4.0	10.0.0
	RP-50	RP-101429	0530	1	Inclusion of new UE categories in Rel-10	9.4.0	10.0.0
03/2011	RP-51	RP-110282	0533	-	36331_CRxxx_Protection of Logged Measurements Configuration	10.0.0	10.1.0
	RP-51	RP-110294	0534	1	Stage-3 CR for MBMS enhancement	10.0.0	10.1.0
	RP-51	RP-110282	0535	-	Clean up MDT-related text	10.0.0	10.1.0
	RP-51	RP-110282	0536	-	Clear MDT configuration and logs when the UE is not registered	10.0.0	10.1.0
	RP-51	RP-110280	0537	-	Correction to the field description of nB	10.0.0	10.1.0
	RP-51	RP-110289	0538	-	CR on impact on UP with remove&add approach_2	10.0.0	10.1.0
	RP-51	RP-110282	0539	-	CR to 36.331 on corrections for MDT	10.0.0	10.1.0
	RP-51	RP-110290	0543	-	Introduction of CA/MIMO capability signalling and measurement capability signalling in CA	10.0.0	10.1.0
	RP-51	RP-110282	0544	-	MDT PDU related clarifications	10.0.0	10.1.0
	RP-51	RP-110282	0545	-	Correction on release of logged measurement configuration while in another RAT	10.0.0	10.1.0
	RP-51	RP-110289	0546	-	Miscellaneous Corrections for CA Running RRC CR	10.0.0	10.1.0
	RP-51	RP-110280	0547	1	Miscellaneous small clarifications and corrections	10.0.0	10.1.0
	RP-51	RP-110293	0548	4	Necessary changes for RLF reporting enhancements	10.0.0	10.1.0
	RP-51	RP-110282	0549	1	Memory size for logged measurements capable UE	10.0.0	10.1.0
	RP-51	RP-110289	0550	-	Parameters confusion of non-CA and CA configurations	10.0.0	10.1.0
	RP-51	RP-110272	0553	-	Presence condition for cellSelectionInfo-v920 in SIB1	10.0.0	10.1.0
	RP-51	RP-110282	0554	1	Removal of MDT configuration at T330 expiry	10.0.0	10.1.0
	RP-51	RP-110289	0556	1	Signalling aspects of existing LTE-A parameters	10.0.0	10.1.0
	RP-51	RP-110280	0557	1	Some Corrections on measurement	10.0.0	10.1.0
	RP-51	RP-110291	0558	-	Stored system information for RNs	10.0.0	10.1.0
	RP-51	RP-110291	0559	-	Support of Integrity Protection for Relay	10.0.0	10.1.0
	RP-51	RP-110290	0561	2	Updates of L1 parameters for CA and UL/DL MIMO	10.0.0	10.1.0
	RP-51	RP-110291	0571	1	Note for Dedicated SIB for RNs	10.0.0	10.1.0
	RP-51	RP-110272	0579	-	Correction to cs-fallbackIndicator field description	10.0.0	10.1.0
	RP-51	RP-110289	0580	-	Clarification to the default configuration of sCellDeactivationTimer	10.0.0	10.1.0
	RP-51	RP-110289	0581	-	Miscellaneous corrections to TS 36.331 on Carrier Aggregation	10.0.0	10.1.0
	RP-51	RP-110280	0584	-	Correction of configuration description in SIB2	10.0.0	10.1.0
	RP-51	RP-110265	0587	-	Clarification of band indicator in handover from E-UTRAN to GERAN	10.0.0	10.1.0
	RP-51	RP-110285	0588	1	36331_CRxxxx Support of Delay Tolerant access requests	10.0.0	10.1.0

DAINGEAN_0002411

	RP-51	RP-110292	0590	-	Update of R2-110807 on CSI measurement resource restriction for time domain ICIC	10.0.0	10.1.0
	RP-51	RP-110292	0591	-	Update of R2-110821 on RRM/RLM resource restriction for time domain ICIC	10.0.0	10.1.0
	RP-51	RP-110290	0592	-	Corrections on UE capability related parameters	10.0.0	10.1.0
	RP-51	RP-110282	0596	-	Validity time for location information in Immediate MDT	10.0.0	10.1.0
	RP-51	RP-110280	0597	-	CR to 36.331 adding UE capability indicator for dual Rx/Tx e1xCSFB	10.0.0	10.1.0
	RP-51	RP-110289	0598	-	Miscellaneous corrections to CA	10.0.0	10.1.0
	RP-51	RP-110280	0599	-	Further correction to combined measurement report of UTRAN	10.0.0	10.1.0
	RP-51	RP-110280	0600	-	Correction to the reference of ETWS	10.0.0	10.1.0
	RP-51	RP-110269	0602	1	Introduction of OTDOA inter-freq RSTD measurement indication procedure	10.0.0	10.1.0
	RP-51	RP-110280	0603	-	Correction of use of RRCConnectionReestablishment message for contention resolution	10.0.0	10.1.0
	RP-51	RP-110282	0604	-	CR to 36.331 on MDT neighbour cell measurements logging	10.0.0	10.1.0
	RP-51	RP-110272	0609	-	Minor ASN.1 corrections for the UEInformationResponse message	10.0.0	10.1.0
	RP-51	RP-110280	0613	-	Clarification regarding dedicated RLF timers and constants	10.0.0	10.1.0
	RP-51	RP-110282	0615	-	Release of Logged Measurement Configuration	10.0.0	10.1.0
	RP-51	RP-110280	0616	-	Some corrections on TS 36.331	10.0.0	10.1.0
	RP-51	RP-110280	0623	-	AC barring procedure clean up	10.0.0	10.1.0
	RP-51	RP-110282	0624	-	Counter proposal to R2-110826 on UE capabilities for MDT	10.0.0	10.1.0
	RP-51	RP-110280	0628	1	UE information report for RACH	10.0.0	10.1.0
	RP-51	RP-110289	0629	2	Measurement on the deactivated SCells	10.0.0	10.1.0
	RP-51	RP-110282	0632	1	Trace configuration paremeters for Logged MDT	10.0.0	10.1.0
	RP-51	RP-110282	0635	-	Clarification on stop condition for timer T3330	10.0.0	10.1.0
	RP-51	RP-110282	0637	-	User consent for MDT	10.0.0	10.1.0
	RP-51	RP-110280	0638	-	Correction on the range of CQI resource index	10.0.0	10.1.0
	RP-51	RP-110272	0640	1	Small corrections to ETWS & CMAS system information	10.0.0	10.1.0
	RP-51	RP-110290	0641	1	UE capability signaling structure w.r.t carrier aggregation, MIMO and measurement gap	10.0.0	10.1.0
	RP-51	RP-110289	0642	1	Normal PHR and the multiple uplink carriers	10.0.0	10.1.0
	RP-51	RP-110280	0643	1	Corrections to TS36.331 on SIB2 handling	10.0.0	10.1.0
	RP-51	RP-110280	0644	1	Adding a Power Management indication in PHR	10.0.0	10.1.0
	RP-51	RP-110289	0646	1	Clarification for CA and TTI bundling in RRC	10.0.0	10.1.0
	RP-51	RP-110443	0648	1	Updates to FGI settings	10.0.0	10.1.0
06/2011	RP-52	RP-110836	0651	-	Add MBMS counting procedure to processing delay requirement for RRC procedure Section 11.2	10.1.0	10.2.0
	RP-52	RP-110830	0653	-	Add pre Rel-10 procedures to processing delay requirement for RRC procedure Section 11.2	10.1.0	10.2.0
	RP-52	RP-110847	0654	1	Addition of a specific reference for physical configuration fields	10.1.0	10.2.0
	RP-52	RP-110839	0656	-	Clarification of inter-frequency RSTD measurement indication procedure	10.1.0	10.2.0
	RP-52	RP-110830	0658	-	Clarification of optionality of UE features without capability	10.1.0	10.2.0
	RP-52	RP-110839	0660	-	Clarification on the definition of maxCellBlack	10.1.0	10.2.0
	RP-52	RP-110839	0661	-	Clarification on upper layer requested connection release	10.1.0	10.2.0
	RP-52	RP-110850	0662	3	Clarification regarding eICIC measurements	10.1.0	10.2.0
	RP-52	RP-110839	0663	-	CR for s-measure handling	10.1.0	10.2.0
	RP-52	RP-110851	0664	1	CR on clarification of RLF Report in Carrier Aggregation	10.1.0	10.2.0
	RP-52	RP-110830	0669	-	FGI bit for handover between LTE FDD/TDD	10.1.0	10.2.0
	RP-52	RP-110847	0670	2	Further updates on L1 parameters	10.1.0	10.2.0
	RP-52	RP-110839	0671	2	General error handling for extension fields	10.1.0	10.2.0
	RP-52	RP-110851	0672	2	Additional information for RLF report	10.1.0	10.2.0
	RP-52	RP-110843	0673	-	Introduction of TCE ID for logged MDT	10.1.0	10.2.0
	RP-52	RP-110670	0674	4	Miscellaneous corrections (related to review in preparation for ASN.1 freeze)	10.1.0	10.2.0
	RP-52	RP-110843	0675	-	PLMN check for MDT logging	10.1.0	10.2.0
	RP-52	RP-110839	0677	-	UE actions upon leaving RRC_CONNECTED	10.1.0	10.2.0
	RP-52	RP-110847	0678	-	Clarification on bandEUTRA-r10 and supportedBandListEUTRA	10.1.0	10.2.0
	RP-52	RP-110837	0679	-	Updated value range for the Extended Wait Timer	10.1.0	10.2.0
	RP-52	RP-110839	0680	1	Value range of DRX-InactivityTimer	10.1.0	10.2.0
	RP-52	RP-110828	0693	1	Correction for SR-VCC and QCI usage	10.1.0	10.2.0
	RP-52	RP-110847	0694	-	Restructuring of CQI-ReportConfig-r10	10.1.0	10.2.0
	RP-52	RP-110839	0695	2	Correction on DL allocations in MBSFN subframes	10.1.0	10.2.0
	RP-52	RP-110850	0700	-	Reference SFN for MeasSubframePattern	10.1.0	10.2.0
	RP-52	RP-110846	0701	-	Clarifications to CA related field descriptions	10.1.0	10.2.0
	RP-52	RP-110847	0702	-	Corrections to codebookSubsetRestriction and SRS parameters	10.1.0	10.2.0
	RP-52	RP-110834	0704	-	Corrections to the handling of ri-ConfigIndex for TM9	10.1.0	10.2.0
	RP-52	RP-110715	0710	2	UE capabilities for Rel-10 LTE features with eICIC measurement restrictions as FGI (Alt.1)	10.1.0	10.2.0
	RP-52	RP-110839	0713	-	CR to 36.331 on redirected utra-TDD carrier frequency	10.1.0	10.2.0
	RP-52	RP-110839	0714	-	Explicit AS signalling for mapped PTMSI/GUTI	10.1.0	10.2.0
	RP-52	RP-110847	0718	-	Counter proposal for Updates of mandatory information in AS-Config	10.1.0	10.2.0

DAINGEAN_0002412

	RP-52	RP-110839	0719	-	CR for Reconfiguration of discardTimer in PDCP-Config	10.1.0	10.2.0
	RP-52	RP-110847	0723	-	On the missing multiplicity of UE capability parameters	10.1.0	10.2.0
	RP-52	RP-110830	0735	-	Radio frame alignment of CSA and MSP	10.1.0	10.2.0
	RP-52	RP-110847	0740	-	Reconfiguration involving critically extended IEs (using fullFieldConfig i.e. option 2)	10.1.0	10.2.0
	RP-52	RP-110839	0744	-	Counter proposal to R2-112753 on CR to remove CSG Identity validity limited to CSG cell	10.1.0	10.2.0
	RP-52	RP-110839	0746	1	Increase of prioritisedBitRate	10.1.0	10.2.0
	RP-52	RP-110847	0747	-	CA and MIMO Capabilities in LTE Rel-10	10.1.0	10.2.0
09/2011	RP-53	RP-111297	0752	-	TS36.331 Correction	10.2.0	10.3.0
	RP-53	RP-111297	0754	-	maxNumberROHC-ContextSessions when no ROHC profile is supported	10.2.0	10.3.0
	RP-53	RP-111280	0757	-	Correction to Subframe Allocation End in PMCH-Info	10.2.0	10.3.0
	RP-53	RP-111288	0761	-	Correction on PUCCH configuration for Un interface	10.2.0	10.3.0
	RP-53	RP-111297	0762	-	Miscellaneous corrections to 36.331	10.2.0	10.3.0
	RP-53	RP-111278	0764	2	36.331 correction on CSG identity validity to allow introduction of CSG RAN sharing	10.2.0	10.3.0
	RP-53	RP-111283	0770	2	AdditionalSpectrumEmissions in CA	10.2.0	10.3.0
	RP-53	RP-111297	0773	-	CR to 36.331 on Small correction of PHR parameter	10.2.0	10.3.0
	RP-53	RP-111283	0775	2	Clarifications to P-max on CA	10.2.0	10.3.0
	RP-53	RP-111280	0784	-	Clarification on for which subframes signalling MCS applies	10.2.0	10.3.0
	RP-53	RP-111283	0792	-	Corrections in RRC	10.2.0	10.3.0
	RP-53	RP-111297	0793	-	Replace the tables with exception list in 10.5 AS-Config	10.2.0	10.3.0
	RP-53	RP-111297	0796	-	Corrections to the field descriptions	10.2.0	10.3.0
	RP-53	RP-111283	0798	-	Configuration of simultaneous PUCCH&PUSCH	10.2.0	10.3.0
	RP-53	RP-111297	0806	-	Corrections to release of csi-SubframePatternConfig and cqi-Mask	10.2.0	10.3.0
	RP-53	RP-111272	0810	-	GERAN SI format for cell change order&PS handover& enhanced redirection to GERAN	10.2.0	10.3.0
	RP-53	RP-111283	0811	-	Corrections to PUCCH-Config field descriptions	10.2.0	10.3.0
12/2011	RP-54	RP-111711	0812	1	Clarification of PCI range for CSG cells	10.3.0	10.4.0
	RP-54	RP-111716	0813	-	Clarifications to Default Radio Configurations	10.3.0	10.4.0
	RP-54	RP-111716	0814	1	Corrections to enhancedDualLayerTDD	10.3.0	10.4.0
	RP-54	RP-111716	0815	-	Miscellaneous small corrections	10.3.0	10.4.0
	RP-54	RP-111716	0816	1	Correction on notation of SRS transmission comb	10.3.0	10.4.0
	RP-54	RP-111706	0823	1	36.331 CR SPS reconfiguration	10.3.0	10.4.0
	RP-54	RP-111716	0827	2	Clarification of list sizes in measurement configuration stored by UE	10.3.0	10.4.0
	RP-54	RP-111706	0835	-	Clarification of the event B1 and ANR related FGI bits	10.3.0	10.4.0
	RP-54	RP-111714	0840	1	Clarification on MBSFN and measurement resource restrictions	10.3.0	10.4.0
	RP-54	RP-111706	0845	-	Clarification on parallel message transmission upon connection re-establishment	10.3.0	10.4.0
03/2012	RP-55	RP-120326	0855	1	Limiting MBMS counting responses to within the PLMN	10.4.0	10.5.0
	RP-55	RP-120321	0857	-	CR to 36.331 on cdma2000 band classes and references	10.4.0	10.5.0
	RP-55	RP-120326	0862	1	Clarification on MBSFN and measurement resource restrictions	10.4.0	10.5.0
	RP-55	RP-120325	0871	-	On SIB10/11 Reception Timing	10.4.0	10.5.0
	RP-55	RP-120326	0875	1	Clarification on MBMS counting for uncipherable services	10.4.0	10.5.0
	RP-55	RP-120325	0876	-	Minor correction regarding limited service access on non-CSG-member cell	10.4.0	10.5.0
	RP-55	RP-120326	0894	-	Time to keep RLF Reporting logs	10.4.0	10.5.0
	RP-55	RP-120356	0895	1	Introducing means to signal different FDD/TDD Capabilities/FGIs for Dual-xDD UE	10.4.0	10.5.0
	RP-55	RP-120321	0899	-	Clarification on SRB2 resumption upon connection re-establishment (parallel message transmission)	10.4.0	10.5.0
	RP-55	RP-120321	0900	1	Duplicated ASN.1 naming correction	10.4.0	10.5.0
06/2012	RP-56	RP-120805	0909	-	SPS Reconfiguration	10.5.0	10.6.0
	RP-56	RP-120805	0912	1	Change in Scheduling Information for ETWS	10.5.0	10.6.0
	RP-56	RP-120807	0914	-	Clarification of mch-SchedulingPeriod configuration	10.5.0	10.6.0
	RP-56	RP-120808	0916	1	Change in Scheduling Information for CMAS	10.5.0	10.6.0
	RP-56	RP-120814	0919	1	Introducing means to signal different REL-10 FDD/TDD Capabilities/FGIs for Dual-xDD UE	10.5.0	10.6.0
	RP-56	RP-120812	0920	1	Clarification on setting of dedicated NS value for CA by E-UTRAN	10.5.0	10.6.0
	RP-56	RP-120808	0931	-	T321 value for UTRA SI acquisition	10.5.0	10.6.0
	RP-56	RP-120813	0957	1	Korean Public Alert System (KPAS) in relation to CMAS	10.5.0	10.6.0
	RP-56	RP-120812	0969	1	Introduction of supported bandwidth combinations for CA	10.5.0	10.6.0
	RP-56	RP-120734	0970	1	Introduction of multiple frequency band indicator	10.5.0	10.6.0
	RP-56	RP-120825	0934	-	Introduction of a new security algorithm ZUC	10.5.0	11.0.0
	RP-56	RP-120813	0973	1	EU-Alert in relation to CMAS	10.5.0	11.0.0
09/2012	RP-57	RP-121371	0982	1	Introduction of EAB	11.0.0	11.1.0
	RP-57	RP-121381	0990	-	Additional special subframe configuration related correction	11.0.0	11.1.0
	RP-57	RP-121423	1000	4	36.331 CR introducing In-Device Coexistence (IDC)	11.0.0	11.1.0
	RP-57	RP-121359	1008	-	Voice support Capabilities	11.0.0	11.1.0
	RP-57	RP-121361	1013	-	Differentiating UTRAN modes in FGIs	11.0.0	11.1.0
	RP-57	RP-121368	1022	1	Introduction of absolute priority based measurements and reselection in CELL_FACH State in 36.331	11.0.0	11.1.0
	RP-57	RP-121370	1024	-	Introducing MDT enhancements for REL-11	11.0.0	11.1.0

DAINGEAN_0002413

	RP-57	RP-121349	1025	2	Introducing Carrier aggregation enhancements for REL-11	11.0.0	11.1.0
	RP-57	RP-121375	1026	-	Introducing MBMS enhancements for REL-11	11.0.0	11.1.0
	RP-57	RP-121376	1052	2	Signaling support for CRS interference management in eICIC	11.0.0	11.1.0
	RP-57	RP-121395	1055	-	CR on scell measurement cycle	11.0.0	11.1.0
	RP-57	RP-121395	1056	-	CR on measurement report	11.0.0	11.1.0
	RP-57	RP-121378	1057	3	Introduction of 'Power preference indication'	11.0.0	11.1.0
	RP-57	RP-121280	1060	-	Correction for PUCCH/SRS Release	11.0.0	11.1.0
12/2012	RP-58	RP-121933	1063	-	Correction related to differentiating UTRAN modes in FGIs	11.1.0	11.2.0
	RP-58	RP-121936	1065	-	Processing delay for RRCConnectionReconfiguration	11.1.0	11.2.0
	RP-58	RP-121953	1066	2	Addition of the stage-3 agreements on IDC	11.1.0	11.2.0
	RP-58	RP-121951	1067	3	Carrier Aggregation Enhancement RAN1 parameters	11.1.0	11.2.0
	RP-58	RP-121957	1068	1	Clarification of SR period	11.1.0	11.2.0
	RP-58	RP-121957	1069	1	Clarification on HandoverCommand message	11.1.0	11.2.0
	RP-58	RP-121957	1070	-	Clarification on mobility related issues	11.1.0	11.2.0
	RP-58	RP-121946	1071	1	Correction of the signaling for Uncertainty and Confidence	11.1.0	11.2.0
	RP-58	RP-121940	1072	2	Corrections to MBMS Service Continuity	11.1.0	11.2.0
	RP-58	RP-121940	1073	-	CR to 36.331 on SIB15 acquisition	11.1.0	11.2.0
	RP-58	RP-121957	1074	1	Handling of 1xCSFB failure	11.1.0	11.2.0
	RP-58	RP-121957	1075	-	Miscellaneous corrections	11.1.0	11.2.0
	RP-58	RP-121958	1076	1	RAN overload control using RRC connection Rejection	11.1.0	11.2.0
	RP-58	RP-121954	1077	-	RRC support for CoMP in UL	11.1.0	11.2.0
	RP-58	RP-121951	1078	-	Some clarification to Carrier aggregation enhancements	11.1.0	11.2.0
	RP-58	RP-121939	1079	1	Validity of EAB SIB and acquisition of SIB1	11.1.0	11.2.0
	RP-58	RP-121922	1085	-	Clarification for Multiple Frequency Band Indicators feature	11.1.0	11.2.0
	RP-58	RP-121924	1089	1	Moving the TM5 capability	11.1.0	11.2.0
	RP-58	RP-121959	1093	1	CR to 36.331 on introducing ROHC context continue for intra-ENB handover	11.1.0	11.2.0
	RP-58	RP-121946	1100	-	Correction on MDT multi-PLMN support	11.1.0	11.2.0
	RP-58	RP-121953	1102	-	Clarification and alignment of handling of other configuration	11.1.0	11.2.0
	RP-58	RP-121970	1103	6	Introducing support for Coordinated Multi-Point (CoMP) operation	11.1.0	11.2.0
	RP-58	RP-121922	1105	2	Introducing further UE aspects regarding multi band cells	11.1.0	11.2.0
	RP-58	RP-121947	1120	-	CR to 36.331 on additional information in RLF report for inter-RAT MRO	11.1.0	11.2.0
	RP-58	RP-121952	1125	1	Correction on Power preference indication	11.1.0	11.2.0
	RP-58	RP-121950	1127	1	SIB1 provisioning via dedicated signalling	11.1.0	11.2.0
	RP-58	RP-121936	1128	2	Measurement reporting of Scells	11.1.0	11.2.0
	RP-58	RP-121956	1129	1	Introduction of EPDCCH parameters in TS 36.331	11.1.0	11.2.0
	RP-58	RP-121961	1130	2	Introduction of Rel-11 UE capabilities	11.1.0	11.2.0
	RP-58	RP-121958	1131	-	Introducion of wideband RSRQ measurements	11.1.0	11.2.0
	RP-58	RP-121958	1146	-	Introduction of network sharing for CDMA2000 inter-working	11.1.0	11.2.0
	RP-58	RP-121960	1157	-	Broadcast of Time Info by Using a New SIB	11.1.0	11.2.0
	RP-58	RP-121957	1175	-	GERAN measurement object at ANR	11.1.0	11.2.0
03/2013	RP-59	RP-130246	1182	2	Miscellaneous corrections from review preceeding ASN.1 freeze	11.2.0	11.3.0
	RP-59	RP-130243	1186	2	DL COMP capability related correction	11.2.0	11.3.0
	RP-59	RP-130231	1193	1	Mandatory supporting of B1 measurement to UMTS FDD (FGI bit 15)	11.2.0	11.3.0
	RP-59	RP-130241	1197	-	Clarification on MBMS Service Continuity	11.2.0	11.3.0
	RP-59	RP-130241	1198	-	IDC Problem Reporting	11.2.0	11.3.0
	RP-59	RP-130247	1210	-	Corrections on definition of CSG member cell	11.2.0	11.3.0
	RP-59	RP-130237	1211	-	Extension of FBI and EARFCN	11.2.0	11.3.0
	RP-59	RP-130228	1220	-	Invalidation of ETWS with security feature	11.2.0	11.3.0
	RP-59	RP-130225	1224	-	Invalid measurement configuration with different (E)ARFCN	11.2.0	11.3.0
	RP-59	RP-130241	1231	2	PPI and IDC indication upon handover	11.2.0	11.3.0
	RP-59	RP-130227	1235	1	Correcting further UE aspects regarding multi band cells	11.2.0	11.3.0
	RP-59	RP-130248	1236	1	Behaviour in case of excessive dedicated priority information	11.2.0	11.3.0
	RP-59	RP-130225	1241	-	Clarification on EARFCN signalling in Mobility control info	11.2.0	11.3.0
	RP-59	RP-130241	1244	-	IDC-SubframePattern length for FDD	11.2.0	11.3.0
	RP-59	RP-130249	1252	-	Introduction of wideband RSRQ measurements in RRC_IDLE	11.2.0	11.3.0
	RP-59	RP-130240	1255	-	Optional support of RLF report for inter-RAT MRO	11.2.0	11.3.0
	RP-59	RP-130233	1258	2	The presence of bandcombination for non-CA capable UEs	11.2.0	11.3.0
	RP-59	RP-130248	1259	-	Correction for event A5	11.2.0	11.3.0
	RP-59	RP-130332	1265	-	Mandating the settings of FGI bit 14, 27 and 28 to true	11.2.0	11.3.0
06/2013	RP-60	RP-130805	1267	-	Clarification on the redirection to UTRA-TDD frequency in case of CSFB High Priority	11.3.0	11.4.0
	RP-60	RP-130804	1269	1	Correction of wrong reference	11.3.0	11.4.0
	RP-60	RP-130809	1270	-	Clarification to support of deprioritisation feature	11.3.0	11.4.0
	RP-60	RP-130809	1271	-	Clarification on KASME key usage	11.3.0	11.4.0
	RP-60	RP-130808	1272	-	Correction on multi-TA capability	11.3.0	11.4.0
	RP-60	RP-130808	1273	-	MBMS interest indication upon handover/ re-establishment	11.3.0	11.4.0
	RP-60	RP-130808	1274	-	Conditions RI reference inheriting CSI process (DL CoMP)	11.3.0	11.4.0
	RP-60	RP-130808	1275	-	Clarification on NZP CSI-RS resource configuration for UE supporting 1 CSI process	11.3.0	11.4.0
	RP-60	RP-130808	1276	-	Corrections to field description of pdsch-Start-r11	11.3.0	11.4.0

DAINGEAN_0002414

	RP-60	RP-130809	1277	-	Need code corrections in Rel-11 RRC	11.3.0	11.4.0
	RP-60	RP-130808	1278	-	Miscellanous small corrections	11.3.0	11.4.0
	RP-60	RP-130809	1279	1	FDD/TDD diff column correction for FGI31	11.3.0	11.4.0
	RP-60	RP-130804	1282	-	measCycleSCell upon SCell configuration	11.3.0	11.4.0
	RP-60	RP-130809	1294	-	Clarification on RRC Connection Reconfiguration with Critical Extension	11.3.0	11.4.0
	RP-60	RP-130802	1298	-	Security key generation in case of MFBI	11.3.0	11.4.0
	RP-60	RP-130804	1303	1	Clarification on inclusion of non-CA band combinations	11.3.0	11.4.0
	RP-60	RP-130809	1308	-	CR on ROHC parameter configuration in Rel-11 RRC	11.3.0	11.4.0
	RP-60	RP-130804	1315	2	Clarification on UE CA capability	11.3.0	11.4.0
	RP-60	RP-130809	1321	-	Updating 3GPP2 specification references	11.3.0	11.4.0
	RP-60	RP-130805	1323	-	Clarification on the configuration of the extended PHR	11.3.0	11.4.0
	RP-60	RP-130805	1324	-	Clarifications on SystemTimeInfoCDMA2000 IE	11.3.0	11.4.0
	RP-60	RP-130808	1325	-	MFBI impact on MBMS service continuity	11.3.0	11.4.0
	RP-60	RP-130819	1329	1	MFBI aspects for dedicated signalling	11.3.0	11.4.0
09/2013	RP-61	RP-131311	1335	-	Clarification on PhysCellIdRange	11.4.0	11.5.0
	RP-61	RP-131311	1339	1	Correction on the first subframe of the measurement gap	11.4.0	11.5.0
	RP-61	RP-131319	1340	1	Correction for MFBI in SIB15 and SIB6	11.4.0	11.5.0
	RP-61	RP-131319	1343	-	Clarification of MFBI impact on MBMS service continuity	11.4.0	11.5.0
	RP-61	RP-131238	1344	2	Clarification of UE action for otherwise in conditions	11.4.0	11.5.0
	RP-61	RP-131311	1348	-	Corrections to the 3GPP2 specification references in 36.331	11.4.0	11.5.0
	RP-61	RP-131318	1353	-	Clarifications regarding the usage of "rlf-Cause" in case of handover failure	11.4.0	11.5.0
12/2013	RP-62	RP-131986	1366	-	Introduction of capability bit for UTRA MFBI	11.5.0	11.6.0
	RP-62	RP-131984	1368	1	Addition of inter-frequency RSTD measurement capability indicator for OTDOA	11.5.0	11.6.0
	RP-62	RP-131989	1370	-	Clarification on supportedBand	11.5.0	11.6.0
	RP-62	RP-132003	1371	-	Capturing mandatory/optional agreements on Rel-11 UE features	11.5.0	11.6.0
	RP-62	RP-131995	1372	-	Clarification on otherwise behaviour	11.5.0	11.6.0
	RP-62	RP-131995	1373	-	Corrections of the 3GPP2 references in TS 36.331	11.5.0	11.6.0
	RP-62	RP-131991	1374	-	measResultLastServCell for SON-HOF report	11.5.0	11.6.0
	RP-62	RP-131729	1375	1	Clarification to timeInfoUTC field in SIB16	11.5.0	11.6.0
	RP-62	RP-131991	1389	-	Clarification on eRedirection to UMTS TDD with multiple UMTS TDD frequencies	11.5.0	11.6.0
	RP-62	RP-131995	1390	-	Delta signalling for critical extension	11.5.0	11.6.0
	RP-62	RP-132005	1391	-	Capability signalling for CSI processes	11.5.0	11.6.0
	RP-62	RP-131991	1395	1	Clarifications on Measurement	11.5.0	11.6.0
	RP-62	RP-131984	1397	-	Correction to InterFreqRSTDMeasurementIndication field descriptions	11.5.0	11.6.0
	RP-62	RP-131984	1404	-	Correction of Inter-frequency RSTD indication for multiple frequencies	11.5.0	11.6.0
	RP-62	RP-131993	1405	1	Enabling SRVCC from GERAN without forwarding UE-EUTRA-Capability	11.5.0	11.6.0
	RP-62	RP-131995	1409	1	System information and change monitoring procedure	11.5.0	11.6.0
	RP-62	RP-131991	1410	1	Correction on presence of codebookSubsetRestriction-r10	11.5.0	11.6.0
	RP-62	RP-131998	1376	-	Introducing UE support for inbound mobility to a shared CSG cell	11.5.0	12.0.0
	RP-62	RP-132002	1378	2	Introduction of support of further DL MIMO enhancement	11.5.0	12.0.0
	RP-62	RP-131988	1379	-	CR for SSAC in CONNECTED	11.5.0	12.0.0
	RP-62	RP-132002	1406	-	Update of CMAS reference to E-UTRAN specific sections in TS23.041	11.5.0	12.0.0
03/2014	RP-63	RP-140359	1424	1	CR on introduction of Cell-specific time-to-trigger	12.0.0	12.1.0
	RP-63	RP-140346	1435	-	UE autonomous modification of cellsTriggered upon serving cell addition/ release	12.0.0	12.1.0
	RP-63	RP-140359	1436	1	Introduction of T312	12.0.0	12.1.0
	RP-63	RP-140362	1439	1	Introduction of UE-supported EARFCN list in handover preparation information for MFBI	12.0.0	12.1.0
	RP-63	RP-140352	1442	-	Correction of Connection Establishement Failure Report	12.0.0	12.1.0
	RP-63	RP-140356	1450	1	Clarification on the presence of TDD special subframe	12.0.0	12.1.0
	RP-63	RP-140359	1453	-	Introduction of UE mobility history reporting (option 2)	12.0.0	12.1.0
	RP-63	RP-140340	1455	1	Clarification regarding need codes, conditions and ASN.1 defaults for extension fields	12.0.0	12.1.0
	RP-63	RP-140340	1456	-	ASN.1 issue with inter-node signalling (AS-Config)	12.0.0	12.1.0
	RP-63	RP-140357	1457	1	Clarification for the SIB occurrence in a single SI message	12.0.0	12.1.0
	RP-63	RP-140364	1462	-	New UE categories for DL 450Mbps class	12.0.0	12.1.0
	RP-63	RP-140354	1463	-	IoT indication for inter-band TDD CA with different UL/DL configuration	12.0.0	12.1.0
06/2014	RP-64	RP-140869	1471	-	Removal of comment line from EUTRA-UE-Variables imports	12.1.0	12.2.0
	RP-64	RP-140871	1475	-	Correction on measObjectList in VarMeasConfig	12.1.0	12.2.0
	RP-64	RP-140879	1477	-	Minor correction inbound mobility to shared CSG cell	12.1.0	12.2.0
	RP-64	RP-140873	1478	-	Clarificaton on precedence of SCell SI provided dedicately	12.1.0	12.2.0
	RP-64	RP-140887	1479	-	Support of the enhancement for TTI bundling for FDD	12.1.0	12.2.0
	RP-64	RP-140885	1490	-	Corrections on timer T312	12.1.0	12.2.0
	RP-64	RP-140885	1486	-	Correction to the description of physCellIdRange in MeasObjectEUTRA	12.1.0	12.2.0

DAINGEAN_0002415

	RP-64	RP-140885	1506	-	Corrections to UE mobility history information	12.1.0	12.2.0
	RP-64	RP-140873	1489	-	ACK/NACK feedback mode on PUSCH	12.1.0	12.2.0
	RP-64	RP-140878	1556	-	SIB15 enhancement for service availability information	12.1.0	12.2.0
	RP-64	RP-140888	1557	-	Introduction of FDD/TDD CA UE capability	12.1.0	12.2.0
	RP-64	RP-140871	1545	-	Clarification of E-UTRA MFBI signalling	12.1.0	12.2.0
	RP-64	RP-140892	1520	1	Extended RLC LI field	12.1.0	12.2.0
	RP-64	RP-140873	1517	1	Network-requested CA Band Combination Capability Signalling	12.1.0	12.2.0
	RP-64	RP-140873	1554	1	Allowing TDD/FDD split for FGI111 and FGI112	12.1.0	12.2.0
	RP-64	RP-140871	1551	1	Inter-RAT ANR capability signalling in FGI33 when UE supports UTRA TDD only	12.1.0	12.2.0
	RP-64	RP-140884	1495	1	Introduction of TDD eIMTA	12.1.0	12.2.0
	RP-64	RP-140885	1499	1	Minor Corrections to T312	12.1.0	12.2.0
	RP-64	RP-140892	1510	1	Introduction of RRC Connection Establishment failure temporary Qoffset handling	12.1.0	12.2.0
	RP-64	RP-140849	1555	2	Introduction of UE capability for eMBMS reception on SCell and Non-Serving Cell	12.1.0	12.2.0
09/2014	RP-65	RP-141494	1632	-	FDD&TDD split for CA	12.2.0	12.3.0
	RP-65	RP-141505	1599	-	UE capabilities for Hetnet mobility in TS 36.331	12.2.0	12.3.0
	RP-65	RP-141499	1584	-	Introduction of UE eIMTA capabilities	12.2.0	12.3.0
	RP-65	RP-141511	1567	-	Corrections to extended RLC LI field	12.2.0	12.3.0
	RP-65	RP-141511	1603	-	TAI reporting of last serving cell	12.2.0	12.3.0
	RP-65	RP-141498	1630	1	Correction to Network-requested CA Band Combination Capability Signalling	12.2.0	12.3.0
	RP-65	RP-141496	1577	1	Clarification on double indication of SAI in SIB15	12.2.0	12.3.0
	RP-65	RP-141496	1597	-	Clarification on MBMSCountingResponse	12.2.0	12.3.0
	RP-65	RP-141496	1623	-	Clarification on the setting of SupportedBandCombination-v1130	12.2.0	12.3.0
	RP-65	RP-141489	1574	1	Correction of E-UTRAN UE capabilities description in HandoverPreparationInformation message field descriptions	12.2.0	12.3.0
	RP-65	RP-141507	1570	-	Introducing MBSFN measurement by extension of logged measurements	12.2.0	12.3.0
	RP-65	RP-141510	1572	1	Introduction of ACB skip for MMTEL voice/video and SMS	12.2.0	12.3.0
	RP-65	RP-141496	1615	1	Clarification on determining MBMS frequencies of interest in MBMSInterestIndication	12.2.0	12.3.0
	RP-65	RP-141506	1579	1	Introduction of signaling support for low complexity UEs	12.2.0	12.3.0
	RP-65	RP-141499	1601	1	Rel-12 ASN.1 correction	12.2.0	12.3.0
	RP-65	RP-141511	1560	1	Introduction of shorter MCH scheduling period	12.2.0	12.3.0
	RP-65	RP-141493	1611	-	Clarification for time-domain resource restriction pattern applicable to neighbour cell RSRQ measurements	12.2.0	12.3.0
	RP-65	RP-141511	1559	2	Correction to stop condition for "Chiba offset"	12.2.0	12.3.0
	RP-65	RP-141115	1636	-	Mandating the FGI bit 31 to true	12.2.0	12.3.0
	RP-65	RP-141618	1566	2	Connected mode procedures and RRC signaling of WLAN/3GPP Radio Interworking for LTE	12.2.0	12.3.0
12/2014	RP-66	RP-142122	1643	-	Clarification on WLAN interworking	12.3.0	12.4.0
	RP-66	RP-142122	1644	-	Correction on handling of dedicated parameters during re-establishment	12.3.0	12.4.0
	RP-66	RP-142122	1645	-	Corrections to WLAN/3GPP Radio Interworking for LTE	12.3.0	12.4.0
	RP-66	RP-142122	1646	-	Reduction of possible values for WLAN backhaul rate thresholds in LTE	12.3.0	12.4.0
	RP-66	RP-142140	1648	-	PDCP SN size change during HO for RLC-UM mode bearers	12.3.0	12.4.0
	RP-66	RP-142124	1651	-	Support of TTI bundling without resource allocation restriction for LTE coverage enhancements for Rel-12	12.3.0	12.4.0
	RP-66	RP-142123	1652	-	Corrections to eIMTA capabilities	12.3.0	12.4.0
	RP-66	RP-142140	1653	-	ACB, ACB-skip, CSFB and SSAC signalling per PLMN	12.3.0	12.4.0
	RP-66	RP-142122	1642	1	Minor corrections regarding WLAN interworking	12.3.0	12.4.0
	RP-66	RP-142115	1659	-	Correction of remaining TBD for Rel-10 FGIs	12.3.0	12.4.0
	RP-66	RP-142117	1663	-	New UE categories for DL 600Mbps	12.3.0	12.4.0
	RP-66	RP-142135	1687	-	Introduction of Dual Connectivity	12.3.0	12.4.0
	RP-66	RP-142140	1697	1	Prohibit timer for SR	12.3.0	12.4.0
	RP-66	RP-142133	1666	-	Support of 256QAM in TS 36.331 (per band 256QAM capability report)	12.3.0	12.4.0
	RP-66	RP-142128	1690	1	Introduction of increased number of frequencies to monitor	12.3.0	12.4.0
	RP-66	RP-142140	1696	2	Introduction of extended RSRQ value range and new RSRQ definition	12.3.0	12.4.0
	RP-66	RP-142115	1650	1	Introduction of signalling for serving cell interruptions	12.3.0	12.4.0
	RP-66	RP-142123	1655	-	Correction for p0-Persistent-SubframeSet2 Handling	12.3.0	12.4.0
	RP-66	RP-142134	1681	-	Introduction of missing Rel-12 UE capabilities	12.3.0	12.4.0
	RP-66	RP-142140	1647	1	Extended RLC LI field correction	12.3.0	12.4.0
	RP-66	RP-142140	1656	-	Outstanding Need OP for non-critical extension removal	12.3.0	12.4.0
	RP-66	RP-142140	1669	2	Clarification on statusReportRequired handling	12.3.0	12.4.0
	RP-66	RP-142131	1698	2	MCH BLER and RSRQ update for MBSFN MDT	12.3.0	12.4.0
	RP-66	RP-142130	1699	1	Optionality support of UE mandatory features for Category 0 UEs	12.3.0	12.4.0
	RP-66	RP-142123	1661	-	Further Clarifications on eIMTA and eICIC	12.3.0	12.4.0
	RP-66	RP-142113	1686	1	UE capability for modified MPR behavior	12.3.0	12.4.0
	RP-66	RP-142132	1664	1	Support of Discovery Signals measurement in TS 36.331	12.3.0	12.4.0

DAINGEAN_0002416

	RP-66	RP-142139	1670	2	RRC Parameters for NAICS	12.3.0	12.4.0
	RP-66	RP-141979	1700	-	UE capability signaling for WLAN/3GPP radio interworking	12.3.0	12.4.0
	RP-66	-	-	-	MCC editorial update	12.4.0	12.4.1
03/2015	RP-67	RP-150373	1737	-	Clarification on the setting of measScaleFactor without reducedMeasPerformance	12.4.1	12.5.0
	RP-67	RP-150371	1747	-	Clarification on Measurement Configuration handling	12.4.1	12.5.0
	RP-67	RP-150371	1765	-	Clarification to usage of field deltaTxD-OffsetPUCCH-Format1bCS-r11 in dedicated uplink power control parameter signalling	12.4.1	12.5.0
	RP-67	RP-150370	1751	-	Clarification on CSI measurement subframe set	12.4.1	12.5.0
	RP-67	RP-150368	1795	-	The absence of supportedMIMO-CapabilityUL-r10	12.4.1	12.5.0
	RP-67	RP-150370	1798	-	Presence of codebookSubsetRestriction	12.4.1	12.5.0
	RP-67	RP-150377	1768	2	Miscellaneous changes resulting from review for REL-12 ASN.1 freeze	12.4.1	12.5.0
	RP-67	RP-150374	1770	2	Introduction of ProSe	12.4.1	12.5.0
06/2015	RP-68	RP-150921	1800	-	Correction field description of networkControlledSyncTx	12.5.0	12.6.0
	RP-68	RP-150921	1801	-	Clarification on SCG reconfiguration	12.5.0	12.6.0
	RP-68	RP-150921	1802	-	Correction for aperiodic CSI trigger	12.5.0	12.6.0
	RP-68	RP-150920	1804	-	Correction on handling of wlan-OffloadConfigDedicated upon leaving RRC_CONNECTED	12.5.0	12.6.0
	RP-68	RP-150921	1805	-	Reconfiguration of SPS	12.5.0	12.6.0
	RP-68	RP-150916	1809	-	CR on Aperiodic CSI Reporting for 1.4MHz cell	12.5.0	12.6.0
	RP-68	RP-150921	1815	-	Clarification on PDCP reconfiguration	12.5.0	12.6.0
	RP-68	RP-150921	1816	-	Correction to SCG change	12.5.0	12.6.0
	RP-68	RP-150921	1817	-	Minor corrections for PSCell configuration in DC	12.5.0	12.6.0
	RP-68	RP-150921	1818	-	CR on ROHC for split bearer	12.5.0	12.6.0
	RP-68	RP-150921	1819	-	Clarification on FDD/TDD differentiation of FGIs/capabilities in TDD-FDD CA	12.5.0	12.6.0
	RP-68	RP-150921	1803	1	Correction to SCG and split bearer configuration	12.5.0	12.6.0
	RP-68	RP-150921	1810	1	Clarifications on use of preconfigComm for direct communication	12.5.0	12.6.0
	RP-68	RP-150921	1811	1	Miscellaneous corrections (a.o. Sidelink)	12.5.0	12.6.0
	RP-68	RP-150921	1813	1	Conditions for establishing RRC Connection for sidelink transmission	12.5.0	12.6.0
	RP-68	RP-150921	1814	1	Correction on field description on SL-TF-ResourceConfig	12.5.0	12.6.0
	RP-68	RP-150917	1806	1	Mandatory present of supportedMIMO-CapabilityDL-r10	12.5.0	12.6.0
	RP-68	RP-150923	1853	-	Clarification on Cell barring for downlink only bands	12.5.0	12.6.0
	RP-68	RP-150917	1852	-	Clarification regarding no MBMS sessions ongoing	12.5.0	12.6.0
	RP-68	RP-150917	1827	1	Correction to additionalSpectrumEmission	12.5.0	12.6.0
	RP-68	RP-150923	1820	4	Clarification on extended RSRQ range support	12.5.0	12.6.0
	RP-68	RP-150917	1838	-	Restriction to CA capability signalling	12.5.0	12.6.0
	RP-68	RP-150921	1823	-	Clarification on PUCCH and SRS	12.5.0	12.6.0
	RP-68	RP-150926	1849	-	Introduction of new DL UE categories 15&16	12.5.0	12.6.0
	RP-68	RP-150923	1824	-	Clean-up corrections to TS 36.331	12.5.0	12.6.0
	RP-68	RP-150918	1846	1	Correction to IDC signalling	12.5.0	12.6.0
	RP-68	RP-150921	1822	1	Change of LCID upon DC-specific DRB reconfiguration	12.5.0	12.6.0
	RP-68	RP-150921	1832	1	Correction to PHR format	12.5.0	12.6.0
	RP-68	RP-150921	1842	1	Correction on conditions for sidelink operation	12.5.0	12.6.0
	RP-68	RP-150811	1834	2	Correction on the SL-TF-IndexPair values for ProSe Direct Discovery	12.5.0	12.6.0
09/2015	RP-69	RP-151443	1866	-	Correction on UE band combinition capability	12.6.0	12.7.0
	RP-69	RP-151438	1869	-	Correction on Restriction to CA capability signalling	12.6.0	12.7.0
	RP-69	RP-151443	1884	-	The support of UL64QAM	12.6.0	12.7.0
	RP-69	RP-151442	1889	-	Small corrections concerning RadioResourceConfig	12.6.0	12.7.0
	RP-69	RP-151441	1900	-	Sidelink discovery related corrections	12.6.0	12.7.0
	RP-69	RP-151440	1905	2	Clarification of Beacon RSSI Encoding	12.6.0	12.7.0
	RP-69	RP-151439	1911	1	CR for IDC signalling enhancement for UL CA	12.6.0	12.7.0
	RP-69	RP-151440	1880	2	Clarification on cell selection sequence upon leaving RRC_CONNECTED	12.6.0	12.7.0
	RP-69	RP-151438	1908	-	Correction to additionalSpectrumEmission - Option 1	12.6.0	12.7.0
	RP-69	RP-151439	1879	1	Correction on the reference of EPDCCH	12.6.0	12.7.0
	RP-69	RP-151441	1891	1	Introducing general handling and guidelines concerning critical extensions within a release	12.6.0	12.7.0
	RP-69	RP-151443	1909	1	Applicability of longCodeState1XRTT for 1xRTT IRAT ANR	12.6.0	12.7.0
	RP-69	RP-151441	1912	1	Sidelink terminology alignment in TS 36.331	12.6.0	12.7.0
	RP-69	RP-151442	1906	2	Clarification for NAICS capability signalling	12.6.0	12.7.0
	RP-69	RP-151467	1861	2	Additional MIMO/CSI capability for intra-band contiguous CA	12.6.0	12.7.0
	RP-69	RP-151466	1887	2	Signalling for 4-layer MIMO with TM3 and TM4	12.6.0	12.7.0
	RP-69	RP-151625	1914	2	Allowing NAICS with TM10	12.6.0	12.7.0
12/2015	RP-70	RP-152053	1916	-	Correction on SCG release	12.7.0	12.8.0
	RP-70	RP-152053	1932	-	Clarification to SCG RLF timers and constants reconfiguration	12.7.0	12.8.0
	RP-70	RP-152053	1933	-	Correction to triggerQuantityCSI-RS	12.7.0	12.8.0
	RP-70	RP-152053	1946	-	Correction to NAICS field descriptions	12.7.0	12.8.0
	RP-70	RP-152055	1947	-	Correction of need code definition terminology	12.7.0	12.8.0
	RP-70	RP-152050	1964	-	Clarification on FDD/TDD difference for UL CA IDC indication	12.7.0	12.8.0
	RP-70	RP-152046	1975	-	Correction to SystemTimeInfoCDMA2000 IE	12.7.0	12.8.0

DAINGEAN_0002417

	RP-70	RP-152053	1928	1	highPriorityAccess for MMTEL voice, MMTEL video and SMS	12.7.0	12.8.0
	RP-70	RP-152053	1986	1	Correction to the support of Mobility State reporting	12.7.0	12.8.0
	RP-70	RP-152046	1971	1	MaxLayerMIMO in HandoverPreparationInformation	12.7.0	12.8.0
	RP-70	RP-152046	1987	-	Correction to ASN.1 field names for 4-layer TM3/4	12.7.0	12.8.0
	RP-70	RP-152053	1969	1	Correction on measurement identity autonomous removal in dual connectivity	12.7.0	12.8.0
	RP-70	RP-152053	1979	1	Clarification on tdd-FDD-CA-PCellDuplex	12.7.0	12.8.0
	RP-70	RP-152049	1919	2	Alternative new maximum transport block sizes for DL 64QAM and 256QAM in TM9/10	12.7.0	12.8.0
	RP-70	RP-152050	1934	1	Some general RRC issues	12.7.0	12.8.0
	RP-70	RP-152055	1965	1	Correction on capability rsrq-OnAllSymbols	12.7.0	12.8.0
	RP-70	RP-152056	1931	2	Addition of establishment cause for mobile-originating VoLTE calls and network indication in SIB2	12.7.0	12.8.0
	RP-70	RP-152048	1927	2	CR to correct UE messages to be sent only after security activation	12.7.0	12.8.0
	RP-70	RP-152053	1973	3	Clarification of MCG	12.7.0	12.8.0
	RP-70	RP-152113	1923	4	Enabling multiple NS and P-Max operation per cell	12.7.0	12.8.0
12/2015	RP-70	RP-152084	1917	-	MCCH acquisition for 1.4MHz MBSFN	12.8.0	13.0.0
	RP-70	RP-152084	1937	-	Paging optimization	12.8.0	13.0.0
	RP-70	RP-152084	1972	-	White-list of cells for EUTRA measurement reporting	12.8.0	13.0.0
	RP-70	RP-152074	1920	1	Intdroduction of Dual Connectivity enhancements in Rel-13	12.8.0	13.0.0
	RP-70	RP-152078	1983	2	Introduction of Licensed-Assisted Access using LTE	12.8.0	13.0.0
	RP-70	RP-152075	1952	1	Extension of Frequency Priorities	12.8.0	13.0.0
	RP-70	RP-152075	1949	1	Introduction of RS-SINR measurements using non critical extension	12.8.0	13.0.0
	RP-70	RP-152079	1961	2	Introducing EBF FD MIMO parameters	12.8.0	13.0.0
	RP-70	RP-152081	1935	1	Removing SCG change restrictions regarding upon handover	12.8.0	13.0.0
	RP-70	RP-152066	1984	1	Introduction of Application specific Congestion control for Data Communication in LTE	12.8.0	13.0.0
	RP-70	RP-152071	1872	6	36331 CR for capturing B5C and SCell on PUCCH	12.8.0	13.0.0
	RP-70	RP-152073	1953	2	Introducing CRS interference mitigation on SCell	12.8.0	13.0.0
	RP-70	RP-152080	1939	3	Introduction of SC-PTM	12.8.0	13.0.0
	RP-70	RP-152082	1941	2	Introduction of Rel-13 MDT enhancements	12.8.0	13.0.0
	RP-70	RP-152075	1955	3	Introduction of load redistribution in RRC_IDLE	12.8.0	13.0.0
	RP-70	RP-152076	1988	-	Introducing extended DRX	12.8.0	13.0.0
	RP-70	RP-152084	1957	3	Clarification on FGI bits setting for MCPTT	12.8.0	13.0.0
	RP-70	RP-152072	1936	2	Introducing eSL	12.8.0	13.0.0
03/2016	RP-71	RP-160454	2001	2	eD2D changes resulting from review for ASN.1 freeze	13.0.0	13.1.0
	RP-71	RP-160468	2002	2	Miscellaneous changes resulting from review for ASN.1 freeze	13.0.0	13.1.0
	RP-71	RP-160470	2005	1	Corrections and missing agreement on the eCA	13.0.0	13.1.0
	RP-71	RP-160470	2006	2	corrections on RSSI measurment	13.0.0	13.1.0
	RP-71	RP-160457	2008	3	Introduction of LTE-WLAN Aggregation	13.0.0	13.1.0
	RP-71	RP-160470	2010	2	Corrections on SC-PTM	13.0.0	13.1.0
	RP-71	RP-160470	2016	-	Support of extended RLC AM SN for SCG	13.0.0	13.1.0
	RP-71	RP-160470	2017	1	Miscellaneous corrections for SC-PTM	13.0.0	13.1.0
	RP-71	RP-160519	2020	2	EBF/FD-MIMO changes related to remaining issues	13.0.0	13.1.0
	RP-71	RP-160467	2022	1	Correction on the RRC signalling configuration for 4Tx MIMO	13.0.0	13.1.0
	RP-71	RP-160462	2039	2	Applicability of longCodeState1XRTT	13.0.0	13.1.0
	RP-71	RP-160470	2040	1	Further clarifications on Rel-13 MDT enhancements	13.0.0	13.1.0
	RP-71	RP-160470	2042	3	Capability for CA enhancement	13.0.0	13.1.0
	RP-71	RP-160470	2043	1	Some corrections on CA enhancement	13.0.0	13.1.0
	RP-71	RP-160460	2048	1	The introduction of UE capability concerning extended E-UTRA frequency priorities	13.0.0	13.1.0
	RP-71	RP-160457	2051	2	Introduction of RAN controlled LTE-WLAN interworking	13.0.0	13.1.0
	RP-71	RP-160459	2054	4	Stage-3 text updates for bearer Identification within IPsec Tunnel and IPsec establishment parameters	13.0.0	13.1.0
	RP-71	RP-160459	2055	4	Introduction of LWIP UE capabilities	13.0.0	13.1.0
	RP-71	RP-160460	2061	1	UE capabilities for LAA	13.0.0	13.1.0
	RP-71	RP-160470	2062	1	Minor corrections for CA enhancements	13.0.0	13.1.0
	RP-71	RP-160467	2066	1	Maximum UL timing difference for DC	13.0.0	13.1.0
	RP-71	RP-160467	2068	1	T321 for Category 0 UE	13.0.0	13.1.0
	RP-71	RP-160503	2069	3	Addition of low complexity UEs and coverage enhancement features	13.0.0	13.1.0
	RP-71	RP-160454	2070	2	eD2D Capability	13.0.0	13.1.0
	RP-71	RP-160470	2072	1	SC-PTM corrections following ASN.1 review	13.0.0	13.1.0
	RP-71	RP-160467	2074	1	Procedural clarification on PSCell change involving PSCell release	13.0.0	13.1.0
	RP-71	RP-160464	2075	2	Modification of network requested CA band combination retrieval for intra-band non-contiguous CA	13.0.0	13.1.0
	RP-71	RP-160470	2087	1	ANR in case of MFBI	13.0.0	13.1.0
	RP-71	RP-160467	2090	-	Clarification on the leftmost bit for the supportedCellGrouping	13.0.0	13.1.0
	RP-71	RP-160467	2094	-	Clarification on the value range of guaranteed power for the MeNB and SeNB	13.0.0	13.1.0
	RP-71	RP-160455	2096	-	36.331 CR on TM10 CRS-IM UE capability report signalling introduction	13.0.0	13.1.0
	RP-71	RP-160456	2097	2	Miscelanous corrections to TS 36.331 related to eDRX	13.0.0	13.1.0
	RP-71	RP-160470	2098	-	Guideline on handling of uplink spare values	13.0.0	13.1.0

DAINGEAN_0002418

	RP-71	RP-160465	2100	-	In-Device Coexistence for UL CA change of victim system	13.0.0	13.1.0
	RP-71	RP-160470	2101	-	Clarification on initial RSSI measurement reporting	13.0.0	13.1.0
	RP-71	RP-160470	2102	-	Introduction of capability on PDSCH collision handling	13.0.0	13.1.0
	RP-71	RP-160470	2103	1	Introduction of the extension of measObjectId range	13.0.0	13.1.0
	RP-71	RP-160470	2105	1	The correction on the description of 5.5.4.1	13.0.0	13.1.0
	RP-71	RP-160470	2106	-	Introduction of sf60 DRX cycle	13.0.0	13.1.0
	RP-71	RP-160467	2109	1	Clarification on NAICS subset capability	13.0.0	13.1.0
	RP-71	RP-160470	2110	-	SC-PTM reception on non-Pcell	13.0.0	13.1.0
	RP-71	RP-160470	2111	-	MBMS interest indication by SC-PTM capable UE	13.0.0	13.1.0
	RP-71	RP-160460	2112	1	Additional Layer 1 capabilities for Rel-13 CA enhancements	13.0.0	13.1.0
06/2016	RP-72	RP-161080	2114	-	Corrections to MTCe in TS 36.331	13.1.0	13.2.0
	RP-72	RP-161080	2115	2	Miscellaneous corrections to TS 36.331	13.1.0	13.2.0
	RP-72	RP-161080	2116	1	Inter-node signalling	13.1.0	13.2.0
	RP-72	RP-161080	2117	-	Clarification on SC-PTM	13.1.0	13.2.0
	RP-72	RP-161076	2118	1	UE capability of an additional Rx and Tx requirement for a CA band combination	13.1.0	13.2.0
	RP-72	RP-161073	2125	-	drb-identity change in full configuration	13.1.0	13.2.0
	RP-72	RP-161080	2126	-	Miscellaneous correction for sidelink	13.1.0	13.2.0
	RP-72	RP-161080	2127	-	Corrections for conditions of sidelink operation	13.1.0	13.2.0
	RP-72	RP-161080	2130	1	Correction on conditions for establishing RRC Connection for sidelink communication	13.1.0	13.2.0
	RP-72	RP-161080	2131	1	Corrections for sidelink communication transmission	13.1.0	13.2.0
	RP-72	RP-161080	2132	1	Correction to WLAN measurements	13.1.0	13.2.0
	RP-72	RP-161080	2133	1	Small corrections to LWIP	13.1.0	13.2.0
	RP-72	RP-161080	2134	1	Small eSL related corrections	13.1.0	13.2.0
	RP-72	RP-161080	2135	1	Alignment of RCLWI configuration	13.1.0	13.2.0
	RP-72	RP-161080	2136	1	Configuration of LWA and LWIP upon handover	13.1.0	13.2.0
	RP-72	RP-161080	2137	1	Introducing EBF/FD-MIMO capabilities	13.1.0	13.2.0
	RP-72	RP-161077	2140	-	Clarification regarding IDC indication upon change of UL CA affecting GNSS	13.1.0	13.2.0
	RP-72	RP-161080	2143	3	Correction of periodic CSI reporting and clarification on p-C and CBSR signalling	13.1.0	13.2.0
	RP-72	RP-161080	2144	-	CR on SI window combining for MTC	13.1.0	13.2.0
	RP-72	RP-161080	2145	-	Avoiding simultaneous configuration of LWA and DC for a UE	13.1.0	13.2.0
	RP-72	RP-161080	2146	-	Miscellaneous RRC corrections for LWA	13.1.0	13.2.0
	RP-72	RP-161080	2147	1	Autonomous WLAN measurement ID removal	13.1.0	13.2.0
	RP-72	RP-161080	2149	1	Correction to channel number range	13.1.0	13.2.0
	RP-72	RP-161080	2150	-	Correction of backhaul bandwidth description	13.1.0	13.2.0
	RP-72	RP-161080	2151	1	Correction on frequency hopping signaling	13.1.0	13.2.0
	RP-72	RP-161075	2152	1	Support of CRS-Assistance signaling for the DL Control Channel IM	13.1.0	13.2.0
	RP-72	RP-161078	2154	-	Correction on condition nonFullConfig in dual connectivity	13.1.0	13.2.0
	RP-72	RP-161080	2159	1	Correction on system information handling in eMTC	13.1.0	13.2.0
	RP-72	RP-161080	2160	1	Correction on essential system information missing	13.1.0	13.2.0
	RP-72	RP-161080	2162	-	Steering command during T350	13.1.0	13.2.0
	RP-72	RP-161080	2163	1	UE behaviours while configured with steeringCommandWLAN (release)	13.1.0	13.2.0
	RP-72	RP-161077	2166	1	Correction of IE name “systemInformationBlockType1Dedicated”	13.1.0	13.2.0
	RP-72	RP-161080	2167	-	Clarification of timer description for MCLD	13.1.0	13.2.0
	RP-72	RP-161080	2169	-	Clarification on the usage of threshold conditions for sidelink relay UE	13.1.0	13.2.0
	RP-72	RP-161080	2170	-	Corrections to LWA	13.1.0	13.2.0
	RP-72	RP-161080	2171	-	Variable Handling for RCLWI	13.1.0	13.2.0
	RP-72	RP-161080	2174	1	Correction on configuration of PRACH and MPDCCH for RA procedure for BL UEs or UEs in CE	13.1.0	13.2.0
	RP-72	RP-161080	2175	-	Clarification on LWA	13.1.0	13.2.0
	RP-72	RP-161080	2176	1	Miscellaneous corrections	13.1.0	13.2.0
	RP-72	RP-161080	2180	-	Correction on FDD/TDD differentiation for Rel-13 capabilities	13.1.0	13.2.0
	RP-72	RP-161080	2181	1	Correction on the definition of sc-mcch-duration	13.1.0	13.2.0
	RP-72	RP-161080	2182	-	System information acquisition for SC-PTM reception on non-Pcell	13.1.0	13.2.0
	RP-72	RP-161080	2183	-	Corrections on capability report for eCA	13.1.0	13.2.0
	RP-72	RP-161080	2185	1	Corrections to RS-SINR configuration	13.1.0	13.2.0
	RP-72	RP-161080	2186	1	UL UE Categories support for 64 QAM	13.1.0	13.2.0
	RP-72	RP-161080	2188	1	Correction on SI update for eDRX	13.1.0	13.2.0
	RP-72	RP-161080	2189	-	Add the field description for mpdcch-NarrowbandsToMonitor-r13	13.1.0	13.2.0
	RP-72	RP-161080	2192	-	WLAN measurements and user preference	13.1.0	13.2.0
	RP-72	RP-161080	2193	1	Miscellaneous corrections resulting from REL-13 ASN.1 review	13.1.0	13.2.0
	RP-72	RP-161080	2195	-	Correction to eMTC message classes and logical channels	13.1.0	13.2.0
	RP-72	RP-161080	2198	-	Some eCA related corrections	13.1.0	13.2.0
	RP-72	RP-161080	2199	1	PUCCH SCell corrections	13.1.0	13.2.0
	RP-72	RP-161080	2200	1	Small corrections of timer description for Sidelink	13.1.0	13.2.0
	RP-72	RP-161080	2201	-	Clarification of use of extended timer values for UEs that support CE mode B	13.1.0	13.2.0
	RP-72	RP-161080	2202	2	Correction to UL SPS operation	13.1.0	13.2.0

DAINGEAN_0002419

	RP-72	RP-161080	2203	1	UE Power Class in UE capability signaling	13.1.0	13.2.0
	RP-72	RP-161080	2204	-	Correction to FD-MIMO field descriptions	13.1.0	13.2.0
	RP-72	RP-161080	2205	1	Miscellaneous eMTC corrections	13.1.0	13.2.0
	RP-72	RP-161080	2206	-	Further miscellaneous eMTC corrections	13.1.0	13.2.0
	RP-72	RP-161080	2207	-	Correction to Initial CE Level	13.1.0	13.2.0
	RP-72	RP-161080	2209	2	Feature Group Indicators and UE capabilities for eMTC	13.1.0	13.2.0
	RP-72	RP-161080	2210	2	CR to capture CIoT optimizations for non-NB-IoT UEs	13.1.0	13.2.0
	RP-72	RP-161080	2211	-	Valid subframes for FDD and TDD DL transmissions	13.1.0	13.2.0
	RP-72	RP-161080	2216	1	Avoiding conflict between rel13 LWA/LWIP and rel12 RALWI	13.1.0	13.2.0
	RP-72	RP-161078	2220	-	Clarification on the presence of ul-64QAM-r12 for DL-only bands	13.1.0	13.2.0
	RP-72	RP-161080	2221	-	Correction on keeping SCG upon inter eNB handove	13.1.0	13.2.0
	RP-72	RP-161080	2222	-	The granularity of LWAAP entity	13.1.0	13.2.0
	RP-72	RP-161080	2223	-	Clarification on WLAN measurment	13.1.0	13.2.0
	RP-72	RP-161080	2224	-	The handling of WLAN status monitoring	13.1.0	13.2.0
	RP-72	RP-161080	2226	1	Clarification on the handover from the MeNB to the SeNB	13.1.0	13.2.0
	RP-72	RP-161080	2230	1	Restricting Unattended Data Traffic	13.1.0	13.2.0
	RP-72	RP-161211	2231	7	Introduction of NB-IoTin 36.331	13.1.0	13.2.0
	RP-72	RP-161080	2233	-	Correction to T302 and T308 conflict issue	13.1.0	13.2.0
	RP-72	RP-161080	2234	1	Various corrections to MTCe related ASN.1 code and field descriptions	13.1.0	13.2.0
	RP-72	RP-161080	2235	-	Clarification to field description for the timer T360	13.1.0	13.2.0
	RP-72	RP-161080	2236	-	Clarification to ordering of Rel13 Frequency priority lists	13.1.0	13.2.0
	RP-72	RP-161080	2238	1	Introduction of LWIP counter	13.1.0	13.2.0
	RP-72	RP-161080	2239	1	Clarification on EpdcchSetConfig for eMTC	13.1.0	13.2.0
	RP-72	RP-161080	2240	2	Skipping fallback “2DL + 1UL” CA in UE capability report in Rel 13	13.1.0	13.2.0
	RP-72	RP-161270	2241	3	NAS timer settings for eMTC	13.1.0	13.2.0

DAINGEAN_0002420

INFORMATION DISCLOSURE CITATION	ATTY. DOCKET NO.	APPLICATION NO.
	HWB-1035-1394	16/597,325
	INVENTOR(S)	
	ISHII	
(Use several sheets if necessary)	FILING DATE	ART UNIT
	10/09/2019	2643

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2014/129951 A1	8-2014	WIPO/PCT				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		3GPP TS 36.331 V13.2.0, Technical Specification, 3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (Release 13) (2016-06)

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

DAINGEAN_0002421

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of
ISHII

Conf. No.: 6587
Atty. Dkt. No.: 161083_1US_1035-1394

Appln. No. 16/597,325

Art Unit: 2643

Filed: 10/09/2019

Examiner: HONG, DUNG

For: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

* * * * * * * * * * *

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Date: June 10, 2020

INFORMATION DISCLOSURE STATEMENT

Sir:

As suggested by 37 C.F.R. 1.97, the undersigned attorney brings to the attention of the Patent and Trademark Office the references listed on the attached form PTO-1449.

☒ All listed documents are attached.

☐ Copies of U.S. Patent Publications are not required and are not attached.

☐ Listed foreign patent publications and other documents are enclosed.

☐ The English translation is a machine translation provided by the Industrial Property Digital Library (IPDL) of the Japan Patent Office (JPO).

☐ The partial translations were provided to the undersigned by the applicants' foreign representative. The undersigned has no knowledge regarding the pertinency of the partially translated portions vis-á-vis the document as a whole. The partial translations are merely provided for whatever convenience they may be.

☐ The listed documents were cited in the ISR and copies should have been supplied by WIPO directly to the US PTO. If copies are not timely received from WIPO, please telephone the undersigned so that copies can be timely supplied for the Examiner's consideration in this US National Phase Application.

This is not to be construed as a representation that a search has been made or that no better prior art exists, or that a reference is relevant merely because cited.

The Examiner is requested to initial the attached form PTO-1449 and to return a copy of the initialed document to the undersigned as an indication that the attached references have been considered and made of record.

The Commissioner is authorized to charge the undersigned's deposit account #14-1140 in whatever amount is necessary for entry of these papers and the continued pendency of the captioned application.

Respectfully submitted,
NIXON & VANDERHYE P.C.

By: /H. Warren Burnam, Jr./
H. Warren Burnam, Jr.
Reg. No. 29,366

HWB:lsh
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 August 2014 (28.08.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/129951 A1

(51) **International Patent Classification**:
H04W 48/10 (2009.01) *H04W 48/12* (2009.01)

(21) **International Application Number**:
PCT/SE2014/050074

(22) **International Filing Date**:
22 January 2014 (22.01.2014)

(25) **Filing Language**: English

(26) **Publication Language**: English

(30) **Priority Data**:
61/769,073 25 February 2013 (25.02.2013) US

(71) **Applicant**: **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).

(72) **Inventors**: **BRISMAR, Sofia**; Törnrosvägen 64, S-181 61 Lidingö (SE). **OVESJÖ, Fredrik**; Turingevägen 104, S-125 43 Älvsjö (SE). **RUNE, Johan**; Terrängvägen 12, S-181 29 Lidingö (SE). **LARSSON, Erik**; Vretgränd 6A, S-753 22 Uppsala (SE). **BERGSTRÖM, Joakim**; Eriksbergsgatan 42, S-114 30 Stockholm (SE).

(74) **Agent**: **AYOUB, Nabil**; Ericsson AB, Patent Unit Kista RAN2, S-164 80 Stockholm (SE).

(81) **Designated States** *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) **Title**: EXTENDED SYSTEM INFORMATION DISTRIBUTION MECHANISMS

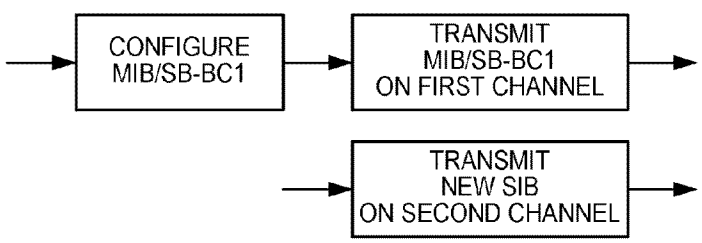


FIG. 2B

(57) **Abstract**: A disclosed method is implemented by a network node in a wireless communication network to transmitting system information to a plurality of wireless terminals. The network node transmits a first group of system information blocks (SIBs) via a first physical channel, and transmits a second group of additional SIBs via a different, second physical channel.A corresponding network node operative to implement the method is also disclosed. Another disclosed method is implemented by a wireless terminal in a wireless communication network. The wireless terminal processes information received from a base station over a first physical channel to identify a first group of SIBs, and processes information received from the base station over a different, second physical channel to identify a second group of additional SIBs.A corresponding wireless terminal operative to implement the method is also disclosed.

WO 2014/129951 A1

EXTENDED SYSTEM INFORMATION DISTRIBUTION MECHANISMS

RELATED APPLICATIONS

This application claims the benefit of provisional Application No. 61/769,037, filed on February 25, 2013, the disclosure of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

The subject matter described herein generally relates to wireless communication networks. In particular, the subject matter relates to methods, apparatuses, and/or systems for distribution of system information. Terminologies from the Third Generation Partnership Project (3GPP) are used below only to facilitate explanation and example application. Wireless systems such as Worldwide Interoperability for Microwave Access (WiMax), Ultra Mobile Broadband (UMB), Global System for Mobile Communications (GSM), WiFi, and others may benefit from the technology described herein.

BACKGROUND

In a wireless network such as a 3GPP Wideband Code Division Multiple Access (WCDMA) network, system information (SI) distribution provides the ability to schedule and broadcast system information over the network air interface. Typically, system information is generated in the Radio Network Controller (RNC) passed to the Radio Base Station (RBS) using the Node B Application Protocol (NBAP) procedure System Information Update. RBS repeats the information periodically on the Broadcast Control Channel (BCCH) which is mapped to a Broadcast Channel (BCH) transport channel carried by the Primary Common Control Physical Channel (P-CCPCH) in the cell.

System information is grouped into different System Information Blocks (SIBs), where each SIB contains information elements of the same nature. Different system information blocks may have different characteristics, e.g., regarding their repetition rate and the requirements on User Equipment (UEs) to re-read the information.

The Master Information Block (MIB), which is also broadcasted over the air interface, provides references and scheduling information to a number of SIBs in the cell. The scheduling of the MIB is standardized by 3GPP. The repetition period is 80 ms (every fourth 20 ms Transmission Time Interval "TTI") and the start position is System Frame Number (SFN) = 0, i.e., the MIB is transmitted in every BCH TTI starting at SFNs where (SFN mod 8) = 0. SIB references can also be provided by separate Scheduling Blocks (SBs). A scheduling block is always referenced from the MIB. Figure 1 illustrates an example structure of SIBs.

The scheduling information in the MIB/SB provides a list of the SB/SIBs transmitted in the cell and their location on the broadcast channel. The scheduling information also contains a

DAINGEAN_0002425

value tag (or an expiration timer) for each SIB that gives information to the UE about the version and validity of the information currently sent on the broadcast channel.

Currently, to acquire the necessary SIBs transmitted on the broadcast channel, the UE must first read the MIB to get references to the first level of SIBs. After that the UE needs to read the Scheduling Block to get references to the remaining SIBs.

One RRC SI message is transmitted in each 20ms TTI on the BCH using RLC transparent mode. The SI message contains:

- The system frame number (SFN) for the first radio frame in the TTI;
- a SIB segment and/or one or several complete SIBs (this information is optional and only included if SIB data is scheduled in the TTI).

If the SI message does not completely fill the transport block, padding is added up to the transport block size of 246 bits.

Different update mechanisms apply for the SIBs depending on whether they contain static or dynamic information. For SIBs containing static information, a value tag is used to indicate when there is a need for the UE to read new information on the broadcast channel. The SIB value tag is sent together with the scheduling information in the MIB or in SB. Whenever the SIB content is modified, the corresponding SIB value tag is updated by the network. Due to the layered structure, a change on the lowest SIB level will propagate all the way up to the MIB, i.e., both the SB- and the MIB value tags will be incremented as well. The new MIB value tag is signaled in message Paging Type 1 (on Paging Channel "PCH") and System Information Change Indication (on the Forward Access Channel “FACH” and High Speed Downlink Shared Channel “HS-DSCH”) to notify the UEs about the updated system information. Once the UE receives the notification, it will start from the top and compare the new value tags signaled on the broadcast channel with the stored value tags. If they differ, the UE needs to reacquire the SIB to get the updated information.

For SIBs containing dynamic information, an expiration timer is used as an update mechanism. When the timer expires, the corresponding SIB information which the UE has stored is considered to be invalid and the UE must acquire the system information block again.

Note that a particular UE at a certain time may require valid information only for a subset of all SIBs broadcasted in the cell. Which SIBs the UE requires depends on the features supported by the UE and the current RRC state (idle mode, PCH or FACH).

The existing system information distribution mechanism was introduced in 3GPP Rel-99 and has not been changed since then. As a result of the High Speed Packet Access (HSPA) feature growth during the past RAN releases, the available BCH capacity of 12 kbps is almost filled up by existing MIB/SB/SIBs supporting features up to Rel-8.

In particular, the following problems related to the current distribution mechanism have been identified:

DAINGEAN_0002426

Fragmentation: Although it is possible to concatenate the last segment (or first segment) of a SIB with one or several complete SIBs in the same transport block, the BCH channel is getting more and more fragmented as the number of SIBs and SIB segments increases. The main contributor is the MIB that must be repeated on the broadcast channel every 4th TTI. Even if the MIB itself does not occupy the full transport block, it is difficult to use the remaining parts in an efficient way.

When more features are enabled in the network, the size of the existing SIBs (e.g., SIB3, SIB5 and SIB11) increases and there is a need to schedule more subsequent segments for each SIB. A subsequent segment requires a TTI of its own and cannot be concatenated with other complete SIBs or SIB segments, i.e., it cannot reuse unfilled parts of the transport blocks. Mixing SIBs with different repetition periods also generates "gaps" on the broadcast channel that can be hard to fill considering that the offset between two consecutive segments of the same SIB is limited to 320 ms by the existing standard.

Scheduling overhead: The UE is informed about the exact position of each SIB segment as well as the value tag (or expiration timer) and scope ("cell" or "PLMN") of the SIB. When the number of SIB segments increases on the broadcast channel, the scheduling overhead grow as well. The UE must first read the scheduling information contained in the MIB and the Scheduling Blocks to find the positions of the SIBs to be acquired. Thus, it is important that the scheduling information be repeated frequently to ensure that the overall time to read system information is acceptable. Today, the scheduling information occupies approximately 25% of the total BCH capacity.

Layered MIB/SB/SIB structure: The current SIB structure uses up to three layers which can delay the system information acquisition. When a SIB is modified, the UE must first read the MIB, followed by the Scheduling Block, to find out which SIB value tag has been changed. After that, the UE is able to read the new SIB and update the corresponding information.

No DTX support: The current SIB structure does not support a DTX format to be used when there is no system information scheduled for the TTI (except the SFN). This costs unnecessary DL transmit power.

SUMMARY

According to one aspect of the present disclosure, a method is implemented by a network node in a wireless communication network for transmitting system information to a plurality of wireless terminals. According to the method, the network node transmits a first group of SIBs via a first physical channel, and transmits a second group of additional SIBs via a different, second physical channel.

In one or more embodiments, the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals, and the second physical channel is configured to be read by only one of the first and second group of

DAINGEAN_0002427

wireless terminals. In one example, the first physical channel is the P-CCPCH, and the second physical channel is one of the S-CCPCH and the HS-PDSCH.

In one or more embodiments, the network node method also includes the network node transmitting, via the first physical channel, scheduling information for reception of the additional SIBs on the second physical channel. The scheduling information may be included in a scheduling block transmitted via the first physical channel.

In one or more embodiments, the network node method also includes the network node transmitting, via the second physical channel, scheduling information for reception of the additional SIBs, and also transmitting, via the first physical channel, either additional scheduling information for reception of the additional SIBs or an indication that the additional SIBs are going to be transmitted via the second physical channel.

In one or more of the embodiments discussed above, the transmitting of the second group of additional SIBs via the second physical channel includes transmitting, via the second physical channel, one or more first SIBs that only include static system information, and transmitting, via the second physical channel, one or more second SIBs that only include dynamic system information.

A corresponding network node configured to implement the various network node methods discussed above is also disclosed.

According to another aspect of the present disclosure, a method is implemented by a wireless terminal in a wireless communication network for processing system information. The wireless terminal processes information received from a base station over a first physical channel to identify a first group of SIBs, and also processes information received from the base station over a different, second physical channel to identify a second group of additional SIBs.

In one or more embodiments, the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals, and the second physical channel is configured to be read by only the second group of wireless terminals. In such embodiments, the wireless terminal is part of the second group of wireless terminals. In one example, the first physical channel is the P-CCPCH, and the second physical channel is one of the S-CCPCH and the HS-PDSCH.

In one or more embodiments, the wireless terminal identifies the second group of additional SIBs based on processing information received from the base station over the first physical channel to identify scheduling information for reception of the additional SIBs on the second physical channel.

In one or more embodiments, the wireless terminal method also includes the wireless terminal processing information received from the base station over the second physical channel to identify scheduling information for reception of the additional SIBs. In these embodiments, the wireless terminal method also includes processing information received from the base station over the first physical channel to identify either additional scheduling

DAINGEAN_0002428

information for reception of the additional SIBs or an indication that the additional SIBs are going to be transmitted via the second physical channel.

In one or more embodiments, the processing of information received from the base station over the second physical channel to identify the second group of additional SIBs includes identifying, from the information received over the second physical channel, one or more first SIBs that only include static system information, and identifying, from the information received over the second physical channel, one or more second SIBs that only include dynamic system information.

A corresponding wireless terminal configured to implement the various wireless terminal methods discussed above is also disclosed.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates an example SIB structure.

Fig. 2a illustrates an example SIB structure according to a first embodiment.

Fig. 2b illustrates an example network node method for the SIB structure of Fig. 2a.

Fig. 2c illustrates an example UE method for the SIB structure of Fig. 2a.

Fig. 3a illustrates a SIB structure according to a second embodiment.

Fig. 3b illustrates an example network node method for the SIB structure of Fig. 3a.

Fig. 3c illustrates an example UE method for the SIB structure of Fig. 3a.

Fig. 4a illustrates an example SIB structure according to a third embodiment.

Fig. 4b illustrates an example network node method for the SIB structure of Fig. 4a.

Fig. 4c illustrates an example UE method for the SIB structure of Fig. 4a.

Fig. 5a illustrates an example SIB structure according to a fourth embodiment.

Fig. 5b illustrates an example network node method for the SIB structure of Fig. 5a.

Fig. 5c illustrates an example UE method for the SIB structure of Fig. 5a.

Fig. 6 illustrates an example mapping of SIB segments to SI messages.

Fig. 7 illustrates an example MAC PDU for transmission on a RACH.

Fig. 8 illustrates an example coding for a TCTF field of the MAC PDU of Fig. 7.

Fig. 9 illustrates an example MAC-i PDU.

Fig. 10 illustrates an example header for the MAC-i PDU of Fig. 9.

Fig. 11 illustrates an example LCH-ID field coding for the MAC-I header of Fig. 10.

Fig. 12 illustrates an example on-demand distribution of system information.

Fig. 13 illustrates an example PICH channel structure.

Fig. 14 illustrates an example AICH channel structure.

Fig. 15 illustrates an example P-CCPCH frame structure.

Fig. 16 illustrates an example method implemented by a network node for transmitting system information to a plurality of wireless terminals.

DAINGEAN_0002429

Fig. 17 illustrates an example method implemented by a wireless terminal for processing system information received over different physical channels.

Fig. 18a illustrates the main functional elements of an example network node capable of distributing system information using one or more of the techniques described above.

Fig. 18b illustrates an example hardware configuration for the network node of Fig. 16a.

Fig. 19a illustrates the main function elements of an example wireless terminal capable of processing system information using one or more of the techniques described above.

Fig. 19b illustrates an example hardware configuration for the wireless terminal of Fig. 17a.

DETAILED DESCRIPTION

To accommodate new system information on the broadcast channel, the existing system information may be transmitted less often. Unfortunately, this will result in longer time for the UE to acquire the necessary SIBs, i.e., increase latency. This could, for example, increase the call setup- and up-switch times from URA/FACH as well as the outage times at IRAT and Inter-frequency cell reselection. Considering that UEs will spend more time in URA/PCH and CELL_FACH states in the future, it is extremely important to minimize performance degradation performance of these states.

The format of the existing broadcast channel may be modified to accommodate the new system information. But note that the broadcast channel is read and needs to be understood by all UEs currently deployed in the networks. All SIBs needed for these legacy UEs need to be transmitted using the existing Rel-99 framework for system information distribution. This implies that there is very limited flexibility to change the format of the existing broadcast channel.

In order to secure the growth for coming releases (e.g., upcoming HSPA releases), there is a need to extend the system information capacity, while maintaining backwards compatibility for the existing UEs.

As indicated above, it is desired to extend the system information distribution mechanism to accomplish the following goals (among others):

- Accommodate distribution of new system information;
- Maintain compatibility with legacy UEs;
- Minimize latencies.

In one or more aspects, a network may utilize a plurality of (i.e., two or more) system information distribution channels to distribute the system information to the wireless terminals (e.g., UEs). For example, first, second, third ... etc. distribution channels may be used. At least one distribution channel, e.g., the first distribution channel, may be used maintain backwards compatibility with the currently existing SI distribution mechanism. The first distribution channel may also be referred to as a legacy distribution channel. At least one other distribution channel, e.g., the second distribution channel, may be used to extend the SI distribution mechanism for

DAINGEAN_0002430

those UEs that capable of understanding the extended mechanism. The second distribution channel may also be referred to as an extended distribution channel.

In the following, SI distribution using first (legacy) and second (extended) SI distribution channels will be described. However, the scope of description can be extended to cover more than two distribution channels.

For ease of reference, the existing SI distribution mechanism for SI broadcast may be referred to as "Broadcast 1" or "BC1." As an illustration, the SI broadcast as specified by 3GPP Rel-99 framework may be considered to be an example of the BC1 mechanism. The scope of the BC1 mechanism may cover all protocols (e.g., NBAP, RRC, L1) and channels (logical channel: BCCH, transport channel: BCH, physical channel: P-CCPCH) used for existing system information distribution.

The SI broadcast for the extended distribution may be referred to as "Broadcast 2" or "BC2." It is intended that the scope of the BC2 mechanism covers protocols and channels (logical channels/transport channels/physical channels) to be used for the new system information distribution mechanism.

EMBODIMENTS OF SIB STRUCTURES FOR EXTENDED SI DISTRIBUTION

Examples of multiple mechanisms to extend the SI distribution are presented below. In a first embodiment, the existing BC1 mechanisms are reused as much as possible. An example SIB structure is illustrated in Figure 2a. The scheduling information in the SB-BC1 in the first distribution channel may be extended to enable references to the new SIBs transmitted on the second distribution channel. The information included in the SB-BC1 may include any one or more of:

- a SIB type which identifies the SIBs (e.g., SIB m+1 ... SIB x). The SIB type may implicitly indicate that the SIB is transmitted on the second distribution channel utilizing the BC2 mechanism;
- an explicit indication that the SIB is transmitted on the second distribution channel utilizing the BC2 mechanism;
- an indication whether the area scope of the SIB is "cell" or "PLMN";
- a value tag if the SIB includes static information;
- an expiration timer if the SIB includes dynamic information;
- a start position (e.g., SFN) on the second distribution channel where the first SIB segment (e.g., SIB m+1) is scheduled and optionally one or several offset parameters if the subsequent SIB segments are not sent in consecutive TTIs;
- a repetition period indicating how often the SIB is repeated on the broadcast channel.

While not illustrated in Figure 2a, the scheduling block in the MIB in the first distribution channel may be extended to refer to the SIBs transmitted on the second distribution. Also, both the MIB and the SB may be extended.

DAINGEAN_0002431

Figure 2b illustrates an example of a method performed by a network node (e.g., RNC, RBS) to distribute system information using the SIB structure of Fig. 2a. It should be noted that the order of transmitting MIB / SB-BC1 on the first channel and the new SIB on the second channel is not particularly significant. They may be transmitted sequentially one after the other or in parallel. They may even partially or totally overlap. In this and in other embodiments described below, the same concept may apply. That is, unless otherwise explicitly indicated, the order of the SIB related information transmitted from the network node is not particularly significant.

The UE may use the legacy BC1 acquisition mechanisms to find the references to the new SIBs on BC2. For example, based on the SIB type (or the new BC1/BC2 indicator), the UE may read the SIB on either BC1 or BC2. Above, it is indicated that the SIB type may implicitly indicate that the SIB is transmitted on the second distribution channel. But also as indicated, this information may be explicitly indicated. This can be useful in circumstances where the SIB type by itself is insufficient to conclude that the SIB is transmitted on the second distribution channel.

Figure 2c illustrates an example method performed by a UE to access the new SIB of Fig. 2a on a second distributions channel. Just as the MIB / SB-BC1 and the new SIBs may be transmitted by the network in any order, the UE may also receive the same in any order. The UE may receive and store the received information in any order. However, the received information may be decoded in the order illustrated in Figure 2c. In this and other embodiments described below, the UE may receive the SIB related information transmissions (and store them) in a random order unless specifically stated otherwise.

Before proceeding further, the following should be noted. The new SIBs – those that are not understood by the legacy UEs – may be transmitted utilizing the extended mechanism BC2. However, this does not necessarily preclude using the second distribution channel to transmit existing SIBs that are understood by the legacy UEs. For example, SIB m+1 may be an example of a new SIB (not understood by legacy UEs) and SIB x may be an example of a legacy SIB. One (of which there can be several) reason for utilizing the BC2 mechanism to transmit legacy SIBs may to balance the load of distributing the SIBs. This concept of possibly utilizing the BC2 mechanism to distribute legacy SIBs may apply to the first embodiment, and to some or all of the other embodiments described below.

In this embodiment, legacy update mechanisms may be reused. When the network (e.g., the RNC, RBS) modifies the content of a SIB transmitted on the second distribution channel, the network may also increment the SIB value tag contained in SB-BC1. The change may propagate up to the MIB on BC1, and the new MIB value tag may be signaled to the UE, e.g., on the PCH and FACH/HS-DSCH transport channels, using the legacy notification messages. For dynamic SIBs, expiration timers may be used.

DAINGEAN_0002432

Figure 3a illustrates an example of a second embodiment of the SIB structure. In this embodiment, the scheduling block (SB-BC1) or the MIB in the first distribution channel may point to a new extended scheduling block (SB-BC2) on the second distribution channel. SB-BC2 in turn may list and provide scheduling information for the SIBs transmitted on the second distribution channel.

Figure 3b illustrates an example of a method performed by a network node (e.g., RNC, RBS) to distribute system information for the SIB structure of Fig. 3a. The scheduling information for SB-BC2 provided in SB-BC1, or in the MIB, may include some or all of the information elements listed for the first embodiment describe above (e.g., area scope, value tag/expiration timer, start position, offset and repetition period). Similarly, the SB-BC2 can include some or all of the scheduling information elements per referenced SIB, or a subset of the information. The SIBs on BC2 can also be referenced using a new set of scheduling information elements included in SB-BC2. Again, the order is not particularly significant.

In this second embodiment, the UE may first use the legacy BC1 acquisition mechanisms to find a reference to the new Scheduling Block on BC2. Once the SB-BC2 has been acquired, the UE can then find the remaining SIBs on second distribution channel.

Figure 3c illustrates an example method performed by the UE to access the SIB of Fig. 3a on a second distributions channel. Again, the order of operations in Figure 3c may indicate the order of decoding the received information – it does not necessarily indicate the order of information reception.

Similar to the first embodiment, legacy update mechanisms may be reused for the second embodiment. When the network modifies the content of a SIB transmitted on the second distribution channel, the network may also increment the SIB value tag contained in SB-BC2. The change may propagate up to the MIB on BC1 via the SB-BC1, and the new MIB value tag may be signaled to the UE, e.g., on the PCH and FACH/HS-DSCH transport channels, using the legacy notification messages.

Figure 4a illustrates an example of a third embodiment of the SIB structure. In this embodiment, the presence of BC2 may be indicated in the MIB or in SB-BC1 on the first distribution channel using a new "BC2 indicator" (second distribution channel indicator). The MIB and/or SB-BC1 may include the BC2 indicator information element.

When BC2 is enabled and the "BC2 indicator" is set, the network node may repeat the scheduling block on BC2 using a start position and repetition period. One or both of the start position and the repetition period may default to predetermined values. For example, they may be defined by a standard (e.g., 3GPP). In an alternative, the start position and/or the repetition period may be provided in the MIB and/or the SB-BC1. As yet another alternative, there may be default start position and/or repetition period that can be superseded by the values provided in the MIB and/or the SB-BC1. Compared to the first and second embodiments described above,

DAINGEAN_0002433

the third embodiment may minimize the additional scheduling overhead that needs to be included on BC1 in order to support BC2.

SB-BC2 may include a value tag to indicate the version of the contained information as well as a list of the SIBs transmitted on BC2 plus relevant scheduling information. The scheduling information may include some or all scheduling information elements listed for the first and/or second embodiments. Also, new set of information elements may be included.

Figure 4b illustrates an example of a method performed by a network node (e.g., RNC, RBS) to distribute system information using the SIB structure of Fig. 4a. In this third embodiment, the UE will understand whether or not BC2 is supported in the cell based on information transmitted on BC1 (e.g., the "BC2 indicator"). If this indicator is set, the UE may read the new scheduling block SB-BC2 on the second distribution channel. The SB-BC2 may be located on a predetermined position on the BC2. Once the SB-BC2 is acquired, the UE then can find the remaining SIBs on second distribution channel.

Figure 4c illustrates an example method performed by the UE to access the SIB of Fig. 4a on a second distributions channel. In this third embodiment, the legacy update mechanisms can be reused to some extent. However, a new SB-BC2 value tag may be included in the Paging Type 1 and System Information Change Indication messages. This value tag may be sent to the UE whenever the content of a BC2 SIB is modified. At reception of the notification (e.g., on PCH, or FACH/HS-DSCH), the UE may check the SB-BC2 and compare the new value tags for the BC2 SIBs with the stored ones. If they differ the UE may reacquire the modified SIB.

Figure 5a illustrates an example of a fourth embodiment of the SIB structure. Unlike the first three embodiments, the new system information to be transmitted on BC2 may be grouped into two separate SIBs depending on how frequent the information is changed by the network. As seen, all static information may be provided in one SIB (denoted SIB-S in Figure 5a) and all dynamic information may be provided in one SIB (denoted SIB-D in Figure 5a).

The presence of BC2 in the fourth embodiment may be indicated in the MIB or in SB-BC1 on the first distribution channel using the new "BC2 indicator", which is similar to the third embodiment. When BC2 is enabled and the "BC2 indicator" is set, the network node may repeat the static SIB-S on the second distribution channel using a start position and repetition period. One or both of the start position and the repetition period may default to predetermined values. For example, they may be defined by a standard (e.g., 3GPP). In an alternative, the start position and/or the repetition period may be provided in the MIB and/or the SB-BC1. As yet another alternative, there may be default start position and/or repetition period that can be superseded by the values provided in the MIB and/or the SB-BC1.

In addition to the static information, the SIB-S may also include one or both of the following:

- A value tag to indicate the version of the contained information in SIB-S;

DAINGEAN_0002434

- Information about the dynamic SIB-D. For example, the presence and position of SIB-D on the second distribution channel (this is considered to be static information).

Figure 5b illustrates an example of a method performed by a network node (e.g., RNC, RBS) to distribute system information using the SIB of Fig. 5a. Grouping all static data in the same SIB implies that the information is transmitted on the broadcast channel using the same repetition period. This can be acceptable since in most cases, there may be little to no benefit in getting a subset of the static BC2 information before the UE has been able to read all legacy information on BC1. Thus, the SIB-S acquisition is not time critical and the repetition period can be set to the largest possible value that matches the time it takes for the UE to read the legacy SIBs on BC1.

Furthermore, when the static information is grouped in the same SIB, the UE reads all SIB segments in order to decode the information, including information related to non-supported features, or other RRC states. However, the SIB-S data is only acquired by the UE when a new cell is entered (and no stored information with matching value tag exists), or when the SIB-S content is changed. Thus, the additional cost to read more information than needed can be neglected.

SIB-D may include all dynamic system information and may be repeated on the second distribution channel with a start position and repetition period. For example, they may be defined by a standard (e.g., 3GPP). In an alternative, the start position and/or the repetition period may be provided in the SIB-S, MIB and/or the SB-BC2. As yet another alternative, there may be default start position and/or repetition period that can be superseded by the values provided in the SIB-S, MIB and/or the SB-BC2.

The content of SIB-D can be associated with one or several expiration timers controlling how often the UE must re-read the information. For example, one subset of the information elements listed in SIB-D can be associated with Expiration timer 1, and another subset of the information elements can be associated with Expiration timer 2. The Expiration timers can be set to different values depending on how frequently the information is changed by the network. Typically the Expiration timer is equal to or longer than the SIB-D repetition period.

The Expiration timers controlling how often the UE must acquire SIB-D information can, for example, be included in either SIB-S (as it can be considered to be static information) or in SIB-D (as the timers must be referenced in SIB-D anyway).

In this third embodiment, the UE will understand whether or not BC2 is supported in the cell based on information transmitted on BC1 (e.g., the "BC2 indicator"). If this indicator is set, the UE may find the static information in SIB-S on a predetermined position on BC2 (standardized or provided in the MIB or SB on BC1). Once the SIB-S is acquired, the UE then can find out whether any dynamic data is broadcasted in the cell, and where this information is scheduled on BC2.

DAINGEAN_0002435

Figure 5c illustrates an example method performed by the UE to access the SIB-S and SIB-D of Fig. 5a on the second distributions channel. In this fourth embodiment, the legacy update mechanisms can be reused to some extent. However, a new SIB-S value tag may be included in the Paging Type 1 and System Information Change Indication messages. This value tag may be sent to the UE whenever the content of a SIB-S is modified. At reception of the notification (e.g., on PCH, or FACH/HS-DSCH), the UE may read and store a new version of the SIB-S.

MAPPING OF SIBS TO SI MESSAGES

The new SB/SIBs to be transmitted on second distribution channel may be encoded and segmented in the RNC. The RNC may then pass the encoded SB/SIB segments and relevant scheduling information to the RBS, e.g., by using the NBAP procedure System Information Update. RBS may then map the SIB segments to System Information (SI) messages and repeat the information on the channel according to the scheduling information provided by RNC.

New system information may be sent to the RBS only when the SIB is generated the first time (typically when the cell is activated or when a specific SB/SIB is enabled), or when the SB/SIB content is modified.

In one embodiment, the new SIB types on the second channel may be segmented and re-assembled using the existing SIB segmentation protocol, e.g., as specified in [1] where it is possible to concatenate SIB segments and/or complete SIBs from several SIB types in the same SI message. The existing NBAP procedure, e.g., as specified in [2], may be extended with new information to support the transfer of the new BC2 SB/SIB types. In the RBS, the new SB/SIB segments may be mapped to SI messages that are transmitted over the Uu interface, e.g., using the RLC transparent mode. The existing SI message, e.g., as specified in [1], may be reused except for the information element (IE) "SFNprime" (11 bits) that may be omitted when the SI message is sent on the second channel.

In an embodiment, the new SIB types on BC2 may be segmented using a new simplified segmentation protocol as outlined in Fig. 6. This protocol can be optimized for a configuration where no concatenation is allowed and each SI message only contains one SIB Type. It can for example be applied for the fourth embodiment described above where BC2 only contains two SIB types (SIB-S and SIB-D).

After RRC ASN.1 encoding, the SIB may be segmented into equally large segments. For the last segment padding may be added to fill up the transport block size. The RNC may transfer segments and relevant scheduling information to the RBS, e.g., using the existing NBAP procedure System Information Update. RBS may map each segment to one System Information (SI) message that is sent over the Uu interface, e.g., using RLC transparent mode.

DAINGEAN_0002436

The SI Message may include a SI header and a payload containing only one SIB segment (first, subsequent or last segment). The SI header may include a fixed length and could contain, but is not limited to, the following information:

- SIB ID – identifies the SIB type contained in the SI message. For the fourth SIB structure embodiment, this field may indicate if the SI message includes a SIB-S or a SIB-D segment;
- SN – Sequence number for the SIB segment. For example, the first segment of a SIB may have SN = 0, the subsequent segment has SN=1, etc. (the starting value of SN may be any number);
- L – Indicates if this is the last segment of the SIB (TRUE/FALSE).

Preferably, the size of the payload will match the size of the transport block used to carry the information on the physical layer.

In another embodiment, no segmentation is performed and one complete SIB may be mapped to one SI message. In this instance, the SI message may include a very simple SI header (to inform the UE about the SIB type) and payload.

For all alternatives described above, the UE should be able to store successfully received SI messages even if they are received out of sequence order. When all segments belonging to the same SIB ID have been acquired, i.e., all segments from SN=0 until the last segment indicated by L=TRUE, the UE may assemble the segments in sequential order and decode the complete SIB.

SI SCHEDULING ALTERNATIVES

Predetermined scheduling: The above described embodiments, predetermined scheduling of SI messages may be implement in which the exact position is known from the scheduling information (or standardized, e.g., by 3GPP). In predetermined scheduling, a frame structure or a numbering of transmission instants such as SFN or sub frame number may be necessary. If the start position and repetition period is known, the location of the SI message may be given by the formula below:

$$(\text{transmission\_instant} \ \textit{mod} \ \text{repetition\_period}) = \text{start\_position}$$

In addition to the predetermined scheduling, the following alternative scheduling options may be considered as well.

Flexible scheduling: If the UE must monitor the second distribution until all required system information is received, this could result in unnecessary reading to take place. For information that is not read very often (e.g., static information), this may be acceptable. But this may not be optimal if UEs need to acquire dynamic information more frequently (e.g., dynamic information). In these instances, the network may ensure that all system information is transmitted often enough, i.e., with a predetermined frequency, but apart from that, the network may have full flexibility when this information is transmitted.

DAINGEAN_0002437

Semi-flexible scheduling: In this alternative, the UE is aware of the scheduling window for the SI Message, within which the UE must monitor all potential transmission instants. The network in this case may ensure that the SI messages are transmitted within their respective scheduling windows.

Note that when the scheduling window in the semi-flexible scheduling coincides with the full repetition period of the second distribution channel system information, this is the same as flexible scheduling. In the following semi-flexible scheduling will be referred when going into details, but it should be understood that the same principles could apply even for flexible scheduling.

On-demand scheduling: In this alternative, the system information is not sent periodically on the broadcast channel. Rather, UE may request the information, e.g., when entering a new cell for which the UE has no stored information. This scheduling option makes it possible to use a more aggressive DTX scheme as the information may be sent only when a UE needs it. The UE may request the system information using different means. Examples of such means are described below.

MAPPING OF SI MESSAGES TO PHYSICAL LAYER

As described above, the higher layers (e.g., Medium Access Control "MAC", Radio Link Control "RLC", and Radio Resource Control "RRC") may segment the system information into a number of SI messages that are to be transmitted at given times or within given time intervals. These SI messages will then have to be mapped to the physical layer and transferred over the Uu interface to the UE. This section outlines alternatives for how this mapping can be done.

Mapping to common control channel: The Secondary Common Control Physical Channel (S-CCPCH) is a physical channel that in existing standard is used to transfer the FACH and PCH transport channels. One alternative is to use this already specified channel also for SI message distribution. The SI messages would then be mapped to an already existing transport channel such as FACH, PCH or BCH, or to a new defined transport channel. For simplicity, let BC2TrCH denote the transport channel used for this purpose. The BC2TrCH would then be mapped onto the S-CCPCH physical channel.

In a preferred embodiment, an additional S-CCPCH may be allocated to carry the BC2TrCH and no other multiplexed transport channel. However, in other embodiments, it is also possible to multiplex the BC2TrCH with FACH and/or PCH onto an existing S-CCPCH, thereby avoiding the need to setup an additional S-CCPCH just for the purpose of BC2TrCH transmission.

Also in a preferred embodiment, each SI message corresponds to one transport block on the BC2TrCH. In other exemplary embodiments, multiple SI messages may be mapped to one transport block, or one SI message could be mapped to multiple transport blocks.

DAINGEAN_0002438

On the current BCH/P-CCPCH, one transport block of size 246 bits is transmitted every 20 ms TTI. The SI message mapped to the transport block includes an 11 bit long SFN. Since there is no need to transfer the SFN also on the second distribution channel, one embodiment would be to reduce the total SI message size with 11 bits by excluding the SFN bits, and map this to a 246-11=235 bit transport block. This is advantageous in that the available payload in the SI message for SIB data would be unchanged, and hence existing segmentation mechanisms could be employed. Further, the existing one-to-one mapping between a SI message and a transport block may be retained.

Other alternatives would be to actually include the SFN or insert padding in those bits also on second distribution channel, and maintain the entire structure based on the existing 246 bit transport blocks and SI messages.

A restriction on the current BCH/P-CCPCH is that one transport block is transmitted in each TTI. When mapping SI messages onto the S-CCPCH, it is possible to let the BC2TrCH carry more than one transport block per TTI. Assuming a one-to-one mapping between SI messages and transport blocks, this implies transmission on multiple SI messages in one TTI. One benefit with allowing multiple transport blocks per TTI is that the transport block size, and hence SI message size, can be kept small. With smaller SI messages, the need for padding in the higher layer segmentation is reduced.

Further, a longer TTI provides more interleaving benefit on fading channels, and can lead to lower required transmit power to achieve a certain block error rate in the UE's detection of the BC2TrCH. However, with longer TTIs, the number of bits contained in the TTI may increase. By splitting these bits over multiple transport blocks, the benefits with long TTI can be obtained without the drawback of longer transport blocks and more padding. By allowing only a subset of the transport blocks in the TTI to be transmitted, the power used during the TTI will be lower than if all transport blocks were transmitted.

When receiving a BC2TrCH with more than one possible transport block per TTI, the UE can then apply blind transport format detection and attempt to decode the maximum number of transport blocks in one TTI. If only a subset of the possible transport blocks is transmitted, the UE would then detect a CRC error when trying to detect a non-existent transport block. For some segmentation solutions, the UE may be aware of the details of the higher layer segmentation of system information into SI messages (in particular how many SI messages it is expected to receive and sequence numbering of these SI messages or the data contained therein). In these cases, the UE can deduce if the CRC error corresponds to a transmitted (expected) but faulty received transport block, or to a non-transmitted (non-expected) transport block. The UE can also limit its detection attempts to only the expected transport blocks, by employing the knowledge of higher layer segmentation.

DAINGEAN_0002439

In the above paragraph it is assumed that no Transport Format Combination Indicator (TFCI) is transmitted for the BC2TrCH TTIs, and that the UE performs blind detection. However, in an embodiment, it is also possible to include a TFCI and let the UE decode this TFCI and then decode the signaled/detected transport format. However, a drawback with this solution is the additional overhead from the TFCI bits.

A further restriction on the current BCH/P-CCPCH is that one transport block must be transmitted each TTI. This is because the SFN needs to be transmitted every TTI, even if there is no other SI data to be sent. In these cases almost all bits in the 246 bit transport block will be padding bits, which just consume downlink power without conveying additional information to the UE.

But in an embodiment, since the SFN is available to the UE on the legacy channels, there is no need to send the SFN on the second distribution channel. Hence, during time instants (TTIs) where there is no SI information or SFN information, the SI messages need not be transmitted. It would then be beneficial to allow these TTIs to go empty, i.e., the S-CCPCH carrying the BC2TrCH will not transmit any bits/power during these TTIs. To allow this, the BC2TrCH may include a transport format corresponding to no transmitted bits (zero rate), e.g., a transport format with zero transport blocks.

Hence, in its most general form, the BC2TrCH would be defined to have a number of transport formats, including a zero rate transport format. In a preferred embodiment the transport format set would include the following transport formats:

TF_N: N transport blocks, each of size TB_size,

where TF_N is the Nth transport format, N = 0, 1, ... max_number_of_transport_blocks_in_TTI. It is expected that the transport block size TB_size would be in the range 100-250 bits, but other values are also possible.

It may be necessary for the UE to be aware of the spreading factor and slot format of the channelization code used for S-CCPCH and the channelization code used for S-CCPCH. Either of these may be standardized (e.g., predetermined in the 3GPP specifications) or provided via higher layer signaling on the first distribution channel.

In one preferred embodiment, the BC2TrCH may be mapped to an S-CCPCH using slot format #0. This is a slot format with a predetermined spreading factor (e.g., 256, which provides sufficient bit rate for the second distribution channel while at the same time consuming as little downlink code resources as possible), no pilot bits (P-CCPCH may be used as phase reference as for the existing P-CCPCH) and no TFCI bits (blind transport format detection may be performed by the UE). If a TFCI needs to be supported as well, then a slot format with TFCI bits should be used, such as slot format #2. Yet another solution would be to define a new slot format on S-CCPCH tailor made for the application of carrying the BC2TrCH.

DAINGEAN_0002440

The TTIs on the BC2TrCH/S-CCPCH can be numbered (e.g., using the SFN or CFN), and hence it is possible for higher layers to indicate when in time different SI messages shall be transmitted over the Uu interface.

An S-CCPCH has an offset from the P-CCPCH frame timing, so that a relation between SFN and CFN timing is defined. In a preferred embodiment, this time offset may be set to zero so that the S-CCPCH used for second distribution channel has identical frame timing as P-CCPCH, and CFN and SFN terms denote the same thing. Higher layers may then indicate in which SFNs the SI messages should be transmitted on the Uu interface. For example, if a SI message is to be scheduled at SFN = 42, then the corresponding BC2TrCH TTI would be mapped to a number of S-CCPCH radio frames, where the first S-CCPCH radio frame starts during the P-CCPCH radio frame corresponding to SFN = 42.

For the common control physical channel (e.g., S-CCPCH) alternative, it may make most sense to let higher layers point out exactly in which TTI the different SI messages are to be transmitted (predetermined scheduling). This is because the BC2TrCH in the preferred embodiment may be mapped to its own radio resources (channelization code), and hence there would be less need to synchronize the activity on this channel with other downlink channels. It is however possible to envision schemes where higher layers provide larger flexibility and the mapping of SI messages to SFNs is more flexible (flexible or semi-flexible scheduling).

Mapping to new physical channel type: In the previous section S-CCPCH was considered as the physical channel carrying BC2TrCH. It should be understood that a new physical channel with similar characteristics as the S-CCPCH may be used instead. If such a channel is defined, it could have slot formats tailor made for the application of carrying BC2TrCH. In its basic form, the slot format may include only data bits (similar to slot format #0 on S-CCPCH). One possible extension would be to let the new physical channel also include bits in the slot format to be used as an indicator of the presence of the second distribution channel. Another possible extension would be to include bits in the slot format to carry the *SI distribution in progress flag* described below.

Mapping to shared channel: The High Speed Physical Downlink Shared Channel (HS-PDSCH) is a physical channel that in existing standard is used to transfer the HS-DSCH transport channel. One alternative is to use this already specified channel also for SI message distribution. The SI messages would then be mapped to the blocks of the transport channel (e.g., HS-DSCH), and these transport blocks would then be mapped onto the physical channel(s) (e.g., HS-PDSCH).

For the already standardized functionality "HS in CELL_FACH", BCCH/CCCH/DCCH logical channels are mapped to MAC-c Protocol Data Units (PDUs) for transmission on the HS-DSCH. In an embodiment, the MAC-ehs protocol may be used which enables the possibility to send one or several MAC-c PDUs in one transport block, and even to segment one MAC-c PDU

DAINGEAN_0002441

into several parts and transmit these parts in different transport blocks (potentially together with other MAC-c PDU segments).

The above HS in CELL_FACH functionality can be reused also for second distribution channel. In a preferred embodiment, each SI message would be mapped to a MAC-c PDU, and these MAC-c PDUs would be forwarded through the MAC-ehs protocol layer to be mapped to transport blocks on the HS-DSCH. In the following, such MAC-c PDUs carrying SI messages are referred to as "SI MAC-c PDUs".

Note that for BC2, there may be no corresponding uplink. Thus, no feedback of ACK/NACK information to HS-DSCH transmissions may be possible. Taking into account that there may be no ACK/NACK feedback, it is possible to have continuous transmission in consecutive TTIs even by using only one Hybrid Automatic Repeat Request (HARQ) process (no need to wait for HARQ ACK/NACK). However, it is also possible to use the concept of multiple HARQ processes (typically 6), in which MAC-ehs PDUs are put for transmission in a specific TTI.

To aid detection of the HS-DSCH / HS-PDSCH, the High Speed Shared Control Channel (HS-SCCH) control channel, which is an example of a shared control channel, has been standardized. By employing the shared control channel, the UE may be made aware of exactly what Transport Format and Resource Combination (TFRC) that is used on the data channel(s) (e.g., HS-PDSCH(s)). These include, among others, the channelization codes used, modulation (e.g., Quadrature Phase Shift Keying "QPSK"/16 Quadrature Amplitude Modulation "16QAM"/64QAM) and transport block size. When a HS-SCCH is used, a masking (scrambling) based on the HS-DSCH Radio Network Temporary Identifier (H-RNTI) is applied to the HS-SCCH, so that only UEs using this specific H-RNTI in its HS-SCCH detection will be able to decode the HS-SCCH. There is also some possibility to run without HS-SCCH, so called HS-SCCH-less operation, in which the UE tries to detect the HS-PDSCH directly (blindly, without detailed information about the used TFRC). To enable this, the UE may be informed in advance of a limited subset of used TFRCs, which the UE then can try to detect blindly.

In one embodiment, the SI MAC-c PDUs may be transmitted on the data channel (e.g., HS-DSCH) with an accompanying HS-SCCH. In this case, it may be necessary for the UEs listening for BC2 to know which HS-SCCH messages are associated with BC2. In one preferred embodiment, this can be achieved by allocating a separate H-RNTI for the BC2 information. This H-RNTI can be defined already in the specifications (hard-coded) or signaled to the UE on the BC1. This H-RNTI could be common for all (or a group of) UEs or be UE specific. UEs in the process of receiving SI on BC2 would then listen for the shared control channel (e.g., HS-SCCH) messages addressed to this specific H-RNTI. When the shared control channel message is detected, the UE then may proceed to detect the HS-DSCH carrying the SI MAC-c PDUs.

DAINGEAN_0002442

A drawback with using an HS-SCCH associated with BC2 is that the power required for the HS-SCCH to cover the entire cell can be rather high. Hence, in another embodiment, the SI MAC-c PDUs may be transmitted on HS-DSCH without any accompanying HS-SCCH. In this case, only a small subset (a predetermined number) of allowed TFRCs may be used for transmission. This subset can be defined already in the specifications (hard-coded), or signaled to the UE on the BC1.

In yet another embodiment, a new control channel (e.g., new HS-SCCH type) may be introduced for conveying BC2 information. This new control channel type (which may be a shared type) may be tailored for SI MAC-c PDUs and designed to consume as little power as possible. For example, only a few (predetermined number of) TFRCs may be supported, a fixed modulation and a fixed number of codes. Also, various coverage enhancement features, such as repetition could be employed.

A benefit with mapping SI messages to a data channel (e.g., HS-PDSCH) is that different transport formats can be used depending on available resources (power, HS-PDSCH codes) and amount of system information to broadcast. This is especially true for the case of flexible or semi-flexible scheduling, where the distribution of SI messages can be steered towards TTIs where there are more available resources (e.g., no other data to be transmitted to any UE in these TTIs).

For the case of predetermined scheduling, each SI MAC-c PDU may be associated with a specific transmission time when the PDU shall be transmitted over the Uu interface. This transmission time may be related to the SFN and subframe number of the HS-PDSCH. Hence, within the priority queue (PQ) associated with these PDUs, the MAC-c PDUs will have an associated transmission time when PDUs need to be transmitted. The scheduler may then need to ensure that priority is given to the PQ with SI MAC-c PDU with a transmission time that corresponds to the TTI to be scheduled.

For the case of flexible or semi-flexible scheduling, each SI MAC-c PDU may be associated with a specific transmission time window when the PDU shall be transmitted over the Uu interface. Hence, within the PQ associated with these PDUs, the MAC-c PDUs may have an associated transmission time window when PDUs need to be transmitted. The scheduler may then need to ensure that priority is given to the PQ with SI MAC-c PDU to meet the transmission window requirement. One example of such an HS scheduler is to let data in SI MAC-c PQs have rather low priority until the end of the allowed scheduling window is approaching, when the priority is increased to ensure that the data will be scheduled within its allowed window.

For any broadcast information, it is important that all UEs in the cell can be reached. Since the TTI is so short on HS-PDSCH, the bit rate transmitted in a TTI can be quite substantial, even if small transport blocks are used. This can cause problems with coverage, since in general the higher the bitrate, the worse the coverage is.

DAINGEAN_0002443

To increase the coverage, autonomous retransmissions (i.e., retransmissions not triggered by any NACK feedback) together with soft combining of the transmissions in the UE can be utilized. In its simplest form, the UE may be informed that a certain amount of autonomous retransmissions are applied, e.g., data that is addressed to TTI X will be repeated in TTIs X+1, X+2, X+3. Another alternative is to send repetitions in each 6th TTI if the UE is using 6 HARQ processes. If the UE knows in advance what autonomous retransmissions that are applied, then soft combining can be applied even if no HS-SCCH is transmitted. If HS-SCCH is transmitted, the UE may know from the new data indicator of the HS-SCCH information if the transmission is a new transmission or is to be soft combined with some earlier transmission(s). The retransmissions can be done either using chase combining or incremental redundancy. However, to really benefit in coverage, the UE may soft combine as many transmissions as possible to arrive at decoding where the CRC check is successful.

To reduce the HS-SCCH overhead when using autonomous retransmissions, it is possible to include a HS-SCCH only with the first transmission and then use the same TFRC for the first transmission as well as all retransmissions. If the UE has knowledge in advance of when the retransmissions will occur, it can then use the knowledge that the TFRC signaled in the single HS-SCCH detected applies for multiple known TTIs, which the UE then can soft combine.

ON-DEMAND SI DISTRIBUTION

The system information can be divided into static parts that remain unchanged over long times, and dynamic parts that are updated quite frequently. *See fourth SIB embodiment above.* In practice, the UE will need to read static SI quite seldom, typically when entering cells the UE has not been in recently (UEs typically remember the SI from cells it has recently visited, to avoid having to read the SI again when returning to the cell). In order to save downlink capacity, one idea is to not continuously distribute the static SI, but instead only distribute it when a UE requests it (referred to as on-demand SI distribution). This can avoid the continuous transmission of information that no UE is listening to, which is a waste of resources.

When the UE needs to read SI that is distributed on demand, the UE may send an *SI distribution request* on the uplink. In one preferred embodiment, this message may be transmitted on the Random Access Channel (RACH) channel, in another preferred embodiment this message is transmitted on the E-DCH channel. Preferably, the SI distribution request is terminated by the RBS, since the RBS is in charge of system information distribution, and a fast response to the request is preferred. This implies that preferably the SI distribution request will not be forwarded to the RNC, as would normal RACH/E-DCH data. However, forwarding the request to the RNC and make the RNC responsible for the response is still possible, albeit less preferred alternative.

DAINGEAN_0002444

The SI distribution request can be a specific preamble, using a specific signature and/or access slot. In that case, the existence of such a preamble is an indication that this is a SI distribution request. An optional RACH/E-DCH message can follow as described in the following.

Another possibility is to let the SI distribution request be part of the RACH/E-DCH message payload.

When RACH is used, the MAC PDU transferred in the RACH transport block has the form outlined in Figure 7 and Figure 8. In one preferred embodiment, the two first bits in the detected RACH message transport block may be used to convey a SI distribution request. These two bits contain the TCTF field of the MAC header, and in current specifications only values 00 and 01 are used. A value 10 or 11 could be used to indicate that the message is a SI distribution request message. This would enable the RBS to quickly detect a SI distribution request without having to unwrap several protocol layers to find a signaling message on RRC-level.

When E-DCH is used, the MAC-i PDUs transferred in the E-DCH transport block has the form outlined in Figures 9-11. In particular, in the MAC-i header 0, the first four bits may be set to a predetermined value, e.g., 1111. Following these bits is a spare field of four bits (which should be set to a predetermined value, e.g., 0000, in current 3GPP releases), and then follows an E-RNTI field.

In one embodiment, a MAC-i header 0 may be used with a value other than 0000 in the spare field to indicate a SI distribution request. In another embodiment, a value different than 0000 in the spare bits may be used to indicate that the subsequent bits do not include an E-RNTI, but rather includes an SI distribution request. This would enable the RBS to quickly detect a SI distribution request by just identifying bits 1111xxxx (where xxxx is different from 0000) in the beginning of the transport block, hence eliminating the need to unwrap several protocol layers to find a signaling message on RRC-level.

In its simplest form, the SI distribution request message may be implemented as a simple flag indicating that all on-demand SIs are requested.

In more advanced forms, the request can be more specific, requesting a set of SIs, where these SIs can correspond e.g., to a subset of SIBs ("SIB33 and SIB42 but no other SIBs") or different specific parts of the SIB-S. In the more advanced form, several bits of information may need to be transmitted on uplink. In one exemplary embodiment these bits indicating which set of SIs that are requested may follow directly after the TCTF field in the MAC header on RACH. In other exemplary embodiments, these bits indicating which set of SBs that are requested may follow in the four spare bits directly after the 4-bit LCH-ID0 field in the MAC-i header 0 on E-DCH, or in the bits directly after the 4-bit LCH-ID0 field and 4-bit spare field in the MAC-i header 0 on E-DCH.

DAINGEAN_0002445

In another embodiment, when a specific signature/access slot is used for SI distribution request, the actual RACH/E-DCH message part can include the required bits that indicate which set of SIs that are requested. In this case, the RBS may decode the transport block, check the CRC and if CRC is ok then assume this is a valid SI distribution request and then interpret the different bits in the decoded message as flags for which set of SIs that have been requested.

A special case may be to just let CRC-OK lead the RBS to retransmit all on-demand SI. This can be useful if detection of a specific signature/access slot is prone to false alarm, and a sanity check is performed on the message part. If the correct preamble is detected, the RBS may proceed to decode the RACH/E-DCH message part transport block according to the predefined format. For example, the message can be just a CRC appended to zero information bits. In the case a specific preamble is used for SI distribution requests, the role of the specific preamble may be to trigger the RBS to attempt to detect a message part that may differ in format from the normal RACH/E-DCH. The SI distribution request may be decoded and understood by the RBS, while in the case of a normal RACH/E-DCH transmission, the transport block contents may be forwarded to RNC for further unwrapping of protocol layers.

One potential issue with UEs sending SI distribution requests is that many UEs can request that same SI information at the same time, causing a high uplink load. As an illustration, consider a case of a train with many UEs arriving into a new cell. All UEs on that train would like to read SI for the new cell.

In order to avoid this unnecessary uplink load, the RBS can, according to one embodiment, be given the possibility to block UEs from sending SI distribution requests. This can be accomplished by introducing an RBS controlled flag in the downlink denoted as *SI distribution in progress flag*. In this embodiment, the UE may be required to read the SI distribution in progress flag before attempting to send the SI distribution request. If the flag indicates that SI distribution is in progress, the UE may be required to refrain from sending the SI distribution request.

In the train scenario, the first UE to send a SI distribution request may trigger the RBS to block further SI distribution requests using the SI distribution in progress flag. There may be a short time between the first UE's request before the flag is updated on the downlink and read by all other UEs. Hence, during a short transition time there may be several SI distribution requests, but may UEs will be blocked from loading the uplink with useless requests (the RBS will anyway start to distribute the requested SI) (see Figure 12).

Hence, in this embodiment, as soon as a UE is missing SIB information because it has never been read or the value tag has changed, the UE may be required to first monitor the SI distribution in progress flag, and if SI distribution is not already in progress (or soon to start), the UE then may send its SI distribution request.

Figure 12 indicates one repetition of the SI after reception of the SI distribution request, and that the SI distribution in progress flag is cleared after all repetitions of requested SIs are

DAINGEAN_0002446

finished. It is also possible to envision that the flag should be cleared as soon as the last transmission of a particular SI part is finished, to enable UEs that missed the earlier parts (that will not be repeated) to request them as soon as possible.

There are multiple possibilities for how to send the SI distribution in progress flag over the Uu interface. In a preferred embodiment, the currently unused bits on an already existing channel such as the Paging Indicator Channel (PICH) or Acquisition Indicator Channel (AICH). A PICH radio frame is 10 ms long and contains 300 bits. However, only the first 288 are used for paging information. The SI distribution in progress flag can be mapped on the remaining 12 bits (or some parts thereof), for example with simple repetition coding of one bit of information (see Figure 13).

An AICH access slot is 20/15 ms long, where only the first 4096 chips are used to transmit AIs. The remaining 1024 chips (or some parts thereof) of the access slot could house the SI distribution in progress flag (see Figure 14).

Yet another embodiment would be to use the DTX-parts of the P-CCPCH to carry the flag. A P-CCPCH slot is 2560 chips long, but out of these, the first 256 chips are currently not transmitted, and can house 2 bits of information. The SI distribution in progress flag can be mapped to these bits in one or several slots (see Figure 15).

If the SI distribution request message is in the form of a single flag indicating that all on-demand SIs are requested, the SI distribution in progress flag needs to only be one bit. In more advanced forms, when the request can be more specific, requesting a set of SIs, a more advanced SI distribution in progress flag may be required. In this case, multiple bits indicating which set of SIs that are being distributed may be necessary. Hence, in these cases, multiple bits may be put on the downlink physical channel used for the flag(s). It is possible to first map the combination of flags per set of SIs to different code words, and then map these code words on the physical channel bits.

Another possibility (and embodiment) is to let a multi-bit SI distribution in progress flag provide information of the number of remaining repetitions of the ongoing SI distribution. In its most elaborate form, this advanced flag may indicate exactly the remaining number of repetitions. A simpler version could be that the advanced flag indicates whether multiple or a single repetition remain (e.g., one out of 'multiple repetitions left' and 'only the last repetition left'). Yet another option could be that the multi-bit flag also could indicate zero repetitions left, in case the last repetition has already started.

In certain scenarios (e.g., cells with high amount of mobility), it may be beneficial to refrain from using the on-demand SI distribution. One alternative is to indicate on the first distribution channel (e.g., in the MIB) whether or not the on-demand SI distribution may be used on the second distribution channel. If on-demand SI distribution is not configured, then no power in downlink will have to be allocated to carry the SI distribution in progress flag, and there will be no additional uplink load from SI distribution requests.

DAINGEAN_0002447

If the second distribution channel is configured to use on-demand SI distribution, it is possible to avoid the uplink load from requests by continuously distributing the SI information and continuously sending a SI distribution in progress flag that indicates that SI distribution is in progress. This in effect disables the on-demand SI distribution mechanism.

When second distribution channel is configured to use on-demand SI distribution, it is even possible to adapt the distribution dynamically to the current situation in the cell. The behavior can e.g., be connected to the cell load in uplink and downlink. If uplink is currently the limiting link, the RBS can disable on-demand SI distribution according to the method in the previous paragraphs. If downlink is the limiting link, it may be more important to not suffer from any unnecessary SI distribution, and then the RBS may employ on-demand SI distribution in the normal way (as shown in Figure 12 above).

Figure 16 illustrates an example method 100 implemented by a network node in a wireless communication network of transmitting system information to a plurality of wireless terminals. According to the method 100, the network node transmits a first group of SIBs via a first physical channel (block 102), and transmits a second group of additional SIBs via a different, second physical channel (block 104).

In one or more embodiments, the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals (e.g., the "legacy distribution channel" discussed above), and the second physical channel is configured to be read by only one of the first and second group of wireless terminals (e.g., the "extended distribution channel" discussed above). In one example, the first physical channel is the P-CCPCH, and the second physical channel is one of the S-CCPCH and the HS-PDSCH.

In one or more embodiments, the method 100 also includes the network node transmitting, via the first physical channel, scheduling information for reception of the additional SIBs on the second physical channel (see, e.g., Figure 2a). The scheduling information may be included in a scheduling block transmitted via the first physical channel (e.g., SB-BC1 in Fig. 2a).

In one or more embodiments, the method 100 also includes the network node transmitting, via the second physical channel, scheduling information for reception of the additional SIBs (e.g., SB-BC2 in Figures 3a and 4a), and also transmitting, via the first physical channel, either additional scheduling information for reception of the additional SIBs (e.g., SB-BC1 in Figure 3a) or an indication that the additional SIBs are going to be transmitted via the second physical channel (as described above in connection with Fig. 4a).

In one or more of the embodiments discussed above, transmitting the second group of additional SIBs via the second physical channel (block 104) includes transmitting, via the second physical channel, one or more first SIBs that only include static system information (e.g., SIB-S in Fig. 5a), and transmitting, via the second physical channel, one or more second SIBs that only include dynamic system information (e.g., SIB-D in Fig. 5a).

DAINGEAN_0002448

In one example, the one or more first SIBs that only include static system information are transmitted according to a first repetition period, and the one or more second SIBs that only include dynamic system information are transmitted according to a different, second repetition period.

In the same or another example, the one or more first SIBs comprise a single first SIB that includes all static system information (e.g., SIB-S in Fig. 5a), and the one or more second SIBs comprise a single second SIB that includes all dynamic system information (e.g., SIB-D in Fig. 5a).

In one or more embodiments, the method 100 also includes performing load balancing between the first and second physical channels by including a SIB from the first group of SIBs in the second group of additional SIBs.

Figure 17 illustrates an example method 200 implemented by a wireless terminal in a wireless communication network of processing system information. According to the method 200, the wireless terminal processes information received from a base station over a first physical channel to identify a first group of system information blocks (SIBs) (block 202), and also processes information received from the base station over a different, second physical channel to identify a second group of additional SIBs (block 204).

In one or more embodiments, the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals (e.g., the "legacy distribution channel" discussed above), and the second physical channel is configured to be read by only the second group of wireless terminals (e.g., the "extended distribution channel" discussed above). In such embodiments, the wireless terminal is part of the second group of wireless terminals. In one example, the first physical channel is the P-CCPCH, and the second physical channel is one of the S-CCPCH and the HS-PDSCH.

In one or more embodiments, the wireless terminal identifies the second group of additional SIBs based on processing information received from the base station over the first physical channel to identify scheduling information for reception of the additional SIBs on the second physical channel (see, e.g., Figures 2a and 3a).

In one or more embodiments, the method 200 also includes the wireless terminal processing information received from the base station over the second physical channel to identify scheduling information for reception of the additional SIBs (e.g., SB-BC2 in Figures 3a and 4a). In these embodiments, the method also includes processing information received from the base station over the first physical channel to identify either additional scheduling information for reception of the additional SIBs (e.g., SB-BC1 in Fig. 3a) or an indication that the additional SIBs are going to be transmitted via the second physical channel (as described above in connection with Fig. 4a).

In one or more embodiments, the processing of information received from the base station over the second physical channel to identify the second group of additional SIBs (block

DAINGEAN_0002449

204) includes identifying, from the information received over the second physical channel, one or more first SIBs that only include static system information (e.g., SIB-S in Fig. 5a), and identifying, from the information received over the second physical channel, one or more second SIBs that only include dynamic system information (e.g., SIB-D in Fig. 5a).

In one example, the one or more first SIBs that only include static system information are received according to a first repetition period, wherein the one or more second SIBs that only include dynamic system information are received according to a different, second repetition period.

In the same or another example, the one or more first SIBs comprises a single first SIB that includes all static system information (e.g., SIB-S in Fig. 5a), and the one or more second SIBs comprises a single second SIB that includes all dynamic system information (e.g., SIB-D in Fig. 5a).

NODES AND TERMINALS

The methods illustrated above may be performed by one or more network nodes and/or wireless terminals. The network node can be a RNC or RBS. Of course, these are merely examples of network nodes and should be not taken in a limiting sense.

Figure 18a illustrates an embodiment of a network node capable of distributing system information utilizing legacy and extended distribution channels according to one or more of the techniques described above. The example network node may include a controller, a communicator and a SI (system information) manager. The communicator may be structured to perform radio communications with wireless terminals via one or more antennas. The communicator may also be structured to perform wired and/or wireless communication with other network nodes. The SI manager may be structured to manage system information and to transmit, via the communicator, system related information (e.g., MIB, SB-BC1, SB-BC2, SIBs, SIB-S, SIB-D, etc.) to one or more wireless terminals. The SI manager may also respond to SI related requests from the wireless terminals. The controller may be structured to control the overall operation of the network node.

Figure 18a provides a logical view of the network node and the components included therein. It is not strictly necessary that each component be implemented as physically separate modules. Some or all components may be combined in a physical module.

Also, the components of the network node need not be implemented strictly in hardware. It is envisioned that the components can be implemented through any combination of hardware and software. For example, as illustrated in Figure 18b, the network node may include one or

DAINGEAN_0002450

more hardware processors, one or more storages (internal, external, both), and one or both of a wireless interface (in case of a radio node) and a network interface.

The processor(s) may be configured to execute program instructions to perform the functions of one or more of the network node components. The instructions may be stored in a non-transitory storage medium or in firmware (e.g., ROM, RAM, Flash) (denoted as storage(s)). Note that the program instructions may also be received through wired and/or or wireless transitory medium via one or both of the wireless and network interfaces. The wireless interface (e.g., a transceiver) may be configured to receive signals from and send signals to wireless terminals via one or more antennas. The network interface may be included and configured to communicate with other network nodes.

Figure 19a illustrates an example embodiment of a wireless terminal capable of processing system information according to one or more of the techniques described above. The wireless terminal of Fig. 19a includes a controller, a communicator and a SI manager. The communicator may be structured to perform radio communications with other radio nodes such as RBS. The SI manager may be structured to receive, via the communicator, SI related information. The SI manager may also request the network node for SI related information. The controller may be structured to control the overall operation of the network node.

As illustrated in Figure 19b, the wireless terminal may include one or more hardware processors, one or more storages, and a wireless interface. The processor(s) may be configured to execute program instructions to perform the functions of one or more of the network node components. The instructions may be stored in a non-transitory storage medium or in firmware (e.g., ROM, RAM, Flash) (denoted as storage(s)). Note that the program instructions may also be received through wired and/or or wireless transitory medium via one or both of the wireless and network interfaces. The wireless interface (e.g., a transceiver) may be configured to receive signals from and send signals to wireless terminals via one or more antennas.

One significant advantage (among others) of using the extended system information distribution mechanism is that the system information capacity is increased while maintaining backwards compatibility for existing UEs.

~~To address these and other problems, one or more methods, apparatuses and/or systems are described herein in which one or more novel techniques to extend the system information distribution can be implemented.~~ As discussed above, in one or more aspects, a plurality of channels may be used to distribute system information. One or more of these distribution channels may be used to maintain backwards compatibility. Also, one or more distribution channels may be used to extend the system information distribution.

Some or all aspects of the disclosed subject matter may be applicable in a wireless network comprising one or more network nodes (e.g., RNC, RBS). An aspect of the disclosed

subject matter may be directed to one or more methods performed by a network node. For example, the network may:

- transmit MIB/SB (which may include information of SIBs) over a legacy distribution channel, and transmit corresponding SIBs over an extended distribution channel;
- transmit MIB/SB (which may include information of SBs) over a legacy distribution channel, transmit corresponding SBs (which may include information of SIBs) over an extended distribution channel, and transmit corresponding SIBs over the extended distribution channel;
- transmit MIB/SB (which may include an indication that extended SI information is available) over a legacy distribution channel, transmit SB (which may include information of SIBs) over an extended distribution channel, and transmit corresponding SIBs over the extended distribution channel;
- transmit MIB/SB (which may include an indication that extended SI information is available) over a legacy distribution channel, transmit SIB-S (which may include static information) over an extended distribution channel, and transmit SIB-D (which may include dynamic information) over the extended distribution channel.

Another aspect of the disclosed subject matter may be directed to program instructions which when executed by a computer of a network node, causes the network node to perform the method as described above. The program instructions may be received through a transitory medium and executed directly therefrom. The program instructions may also be stored in a non-transitory storage medium and the network node may read the program instructions therefrom.

Another aspect of the disclosed subject matter may be directed to one or more methods performed by a wireless terminal in a wireless network to receive SIBs. For example, the wireless terminal may:

- read/decode MIB/SB (which may include information of SIBs) received over a legacy distribution channel, and read/decode corresponding SIBs received over an extended distribution channel;
- read/decode MIB/SB (which may include information of SBs) received over a legacy distribution channel, read/decode corresponding SBs (which may include information of SIBs) received over an extended distribution channel, and read/decode corresponding SIBs received over the extended distribution channel;
- read/decode MIB/SB (which may include an indication that extended SI information is available) received over a legacy distribution channel, read/decode SB (which may include information of SIBs) received over an extended distribution channel, and read/decode corresponding SIBs received over the extended distribution channel;
- read/decode MIB/SB (which may include an indication that extended SI information is available) received over a legacy distribution channel, read/decode SIB-S (which may

include static information) received over an extended distribution channel, and read/decode SIB-D (which may include dynamic information) received over the extended distribution channel.

Another aspect of the disclosed subject matter may be directed to program instructions which when executed by a computer of a wireless terminal, causes the wireless terminal to perform the method as described above. The program instructions may be received through a transitory medium and executed directly therefrom. The program instructions may also be stored in a non-transitory storage medium and the network node may read the program instructions therefrom.

The present disclosure may, of course, be carried out in other ways than those specifically set forth herein without departing from essential characteristics of the disclosure. The present embodiments are to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

DAINGEAN_0002453

CLAIMS

What is claimed is:

1. A method implemented by a network node in a wireless communication network of transmitting system information to a plurality of wireless terminals, the method characterized by:

transmitting a first group of system information blocks (SIBs) via a first physical channel; and

transmitting a second group of additional SIBs via a different, second physical channel.

2. The method of claim 1:

wherein the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals; and

wherein the second physical channel is configured to be read by only one of the first and second group of wireless terminals.

3. The method of any one of claims 1-2, further characterized by:

transmitting, via the first physical channel, scheduling information for reception of the additional SIBs on the second physical channel.

4. The method of any one of claims 1-2, further characterized by:

transmitting, via the second physical channel, scheduling information for reception of the additional SIBs; and

transmitting, via the first physical channel, either additional scheduling information for reception of the additional SIBs or an indication that the additional SIBs are going to be transmitted via the second physical channel.

5. The method of any one of claims 1-4, wherein transmitting the second group of additional SIBs via the second physical channel is characterized by:

transmitting, via the second physical channel, one or more first SIBs that only include static system information; and

transmitting, via the second physical channel, one or more second SIBs that only include dynamic system information.

6. The method of claim 5, wherein the one or more first SIBs that only include static system information are transmitted according to a first repetition period, and the one or more second SIBs that only include dynamic system information are transmitted according to a different, second repetition period.

DAINGEAN_0002454

7. The method of any one of claims 5-6:
wherein the one or more first SIBs comprises a single first SIB that includes all static system information; and
wherein the one or more second SIBs comprises a single second SIB that includes all dynamic system information.

8. The method of any one of claims 1-7, further characterized by:
performing load balancing between the first and second physical channels by including a SIB from the first group of SIBs in the second group of additional SIBs.

9. The method of any one of claims 1-8:
wherein the first physical channel is a Primary Common Control Physical Channel (P-CCPCH); and
wherein the second physical channel is one of a Secondary Common Control Physical Channel (S-CCPCH) and a High Speed Physical Downlink Shared Channel (HS-PDSCH).

10. A network node comprising:
a transceiver; and
one or more processing circuits configured to utilize the transceiver to implement the method of any one of claims 1-9.

11. A method implemented by a wireless terminal in a wireless communication network, the method characterized by:
processing information received from a base station over a first physical channel to identify a first group of system information blocks (SIBs);
processing information received from the base station over a different, second physical channel to identify a second group of additional SIBs.

12. The method of claim 11:
wherein the first physical channel is configured to be read by a first group of wireless terminals and also by a different, second group of wireless terminals;
wherein the second physical channel is configured to be read by only the second group of wireless terminals; and
wherein the wireless terminal is part of the second group of wireless terminals.

DAINGEAN_0002455

13. The method of any one of claims 11-12, wherein identification of the second group of additional SIBs is based on:

processing information received from the base station over the first physical channel to identify scheduling information for reception of the additional SIBs on the second physical channel.

14. The method of any one of claims 11-12, further characterized by:

processing information received from the base station over the second physical channel to identify scheduling information for reception of the additional SIBs; and

processing information received from the base station over the first physical channel to identify either additional scheduling information for reception of the additional SIBs or an indication that the additional SIBs are going to be transmitted via the second physical channel.

15. The method of any one of claims 11-14, wherein said processing information received from the base station over the second physical channel to identify the second group of additional SIBs is characterized by:

identifying, from the information received over the second physical channel, one or more first SIBs that only include static system information; and

identifying, from the information received over the second physical channel, one or more second SIBs that only include dynamic system information.

16. The method of claim 15, wherein the one or more first SIBs that only include static system information are received according to a first repetition period, wherein the one or more second SIBs that only include dynamic system information are received according to a different, second repetition period.

17. The method of any one of claims 15-16:

wherein the one or more first SIBs comprises a single first SIB that includes all static system information; and

wherein the one or more second SIBs comprises a single second SIB that includes all dynamic system information.

DAINGEAN_0002456

18. The method of any one of claims 11-17:

wherein the first physical channel is a Primary Common Control Physical Channel (P-CCPCH); and

wherein the second physical channel is one of a Secondary Common Control Physical Channel (S-CCPCH) and a High Speed Physical Downlink Shared Channel (HS-PDSCH).

19. A wireless terminal comprising:

a transceiver; and

one or more processing circuits configured to utilize the transceiver to implement the method of any one of claims 11-18.

DAINGEAN_0002457

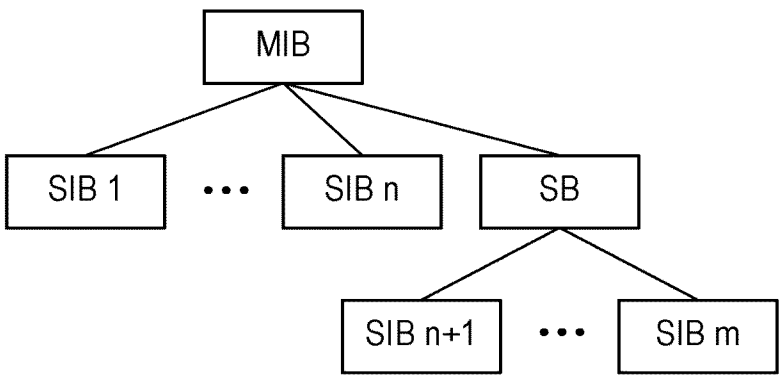


FIG. 1

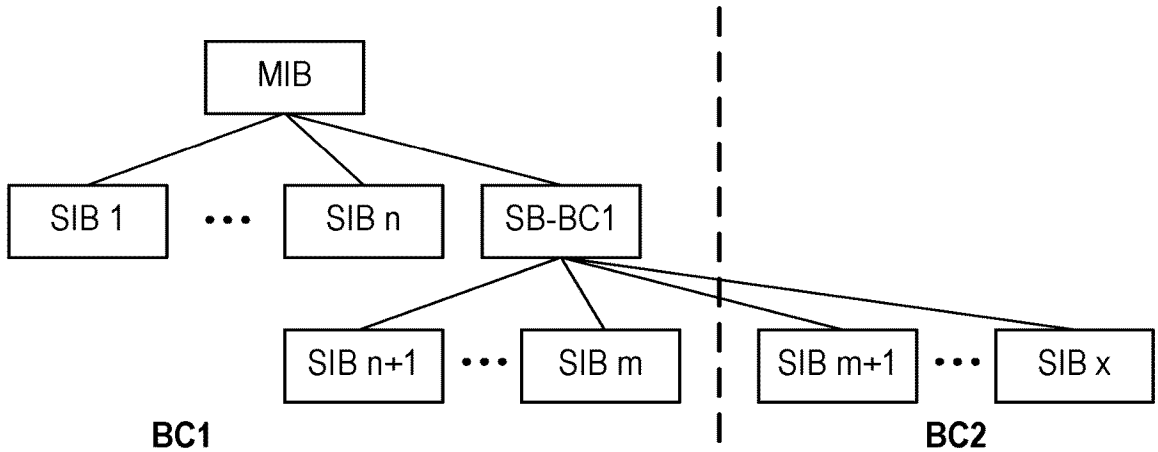


FIG. 2A

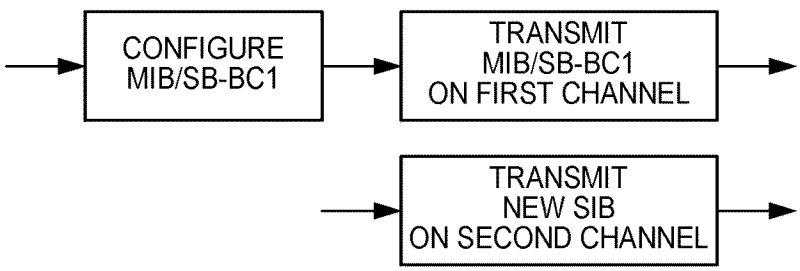


FIG. 2B

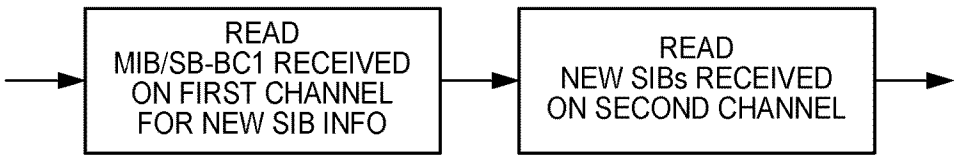


FIG. 2C

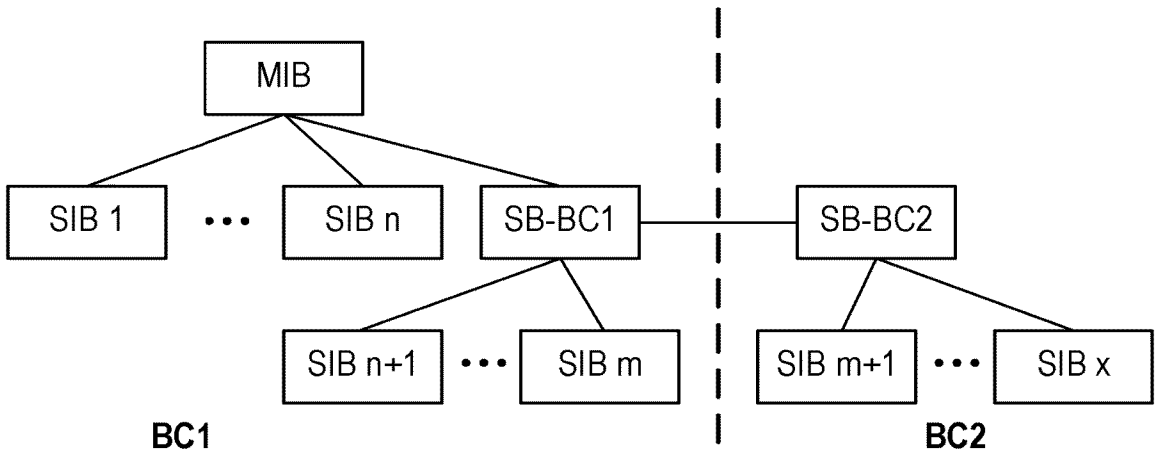


FIG. 3A

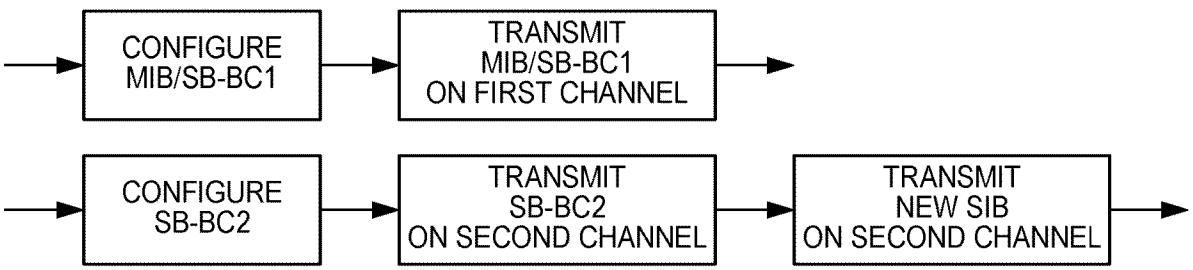


FIG. 3B

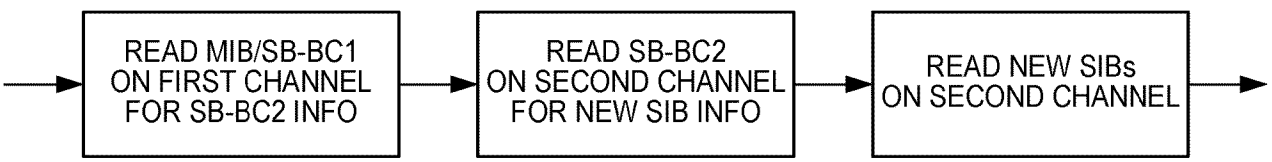


FIG. 3C

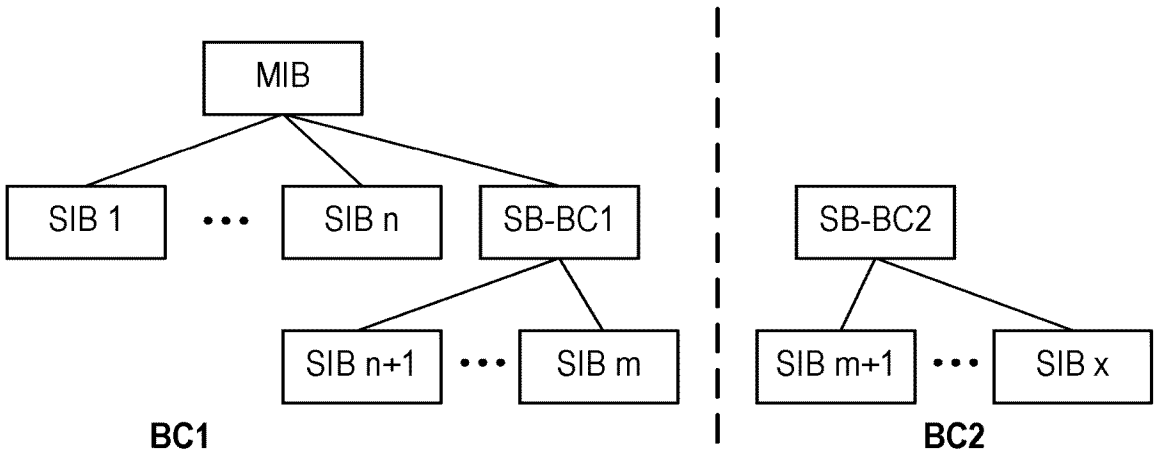


FIG. 4A

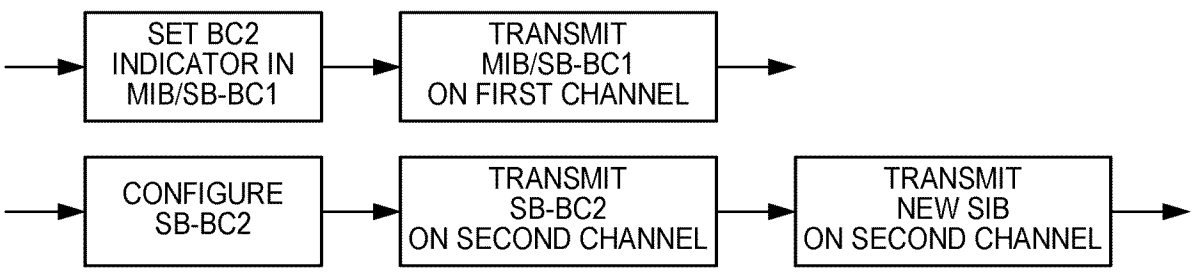


FIG. 4B

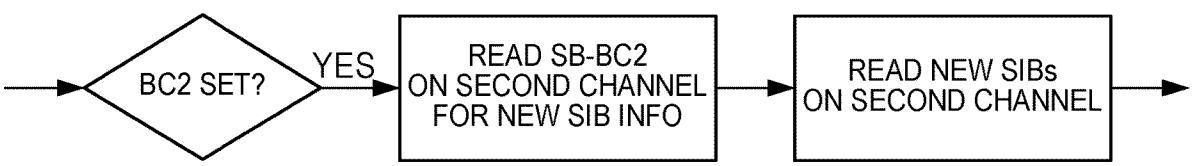


FIG. 4C

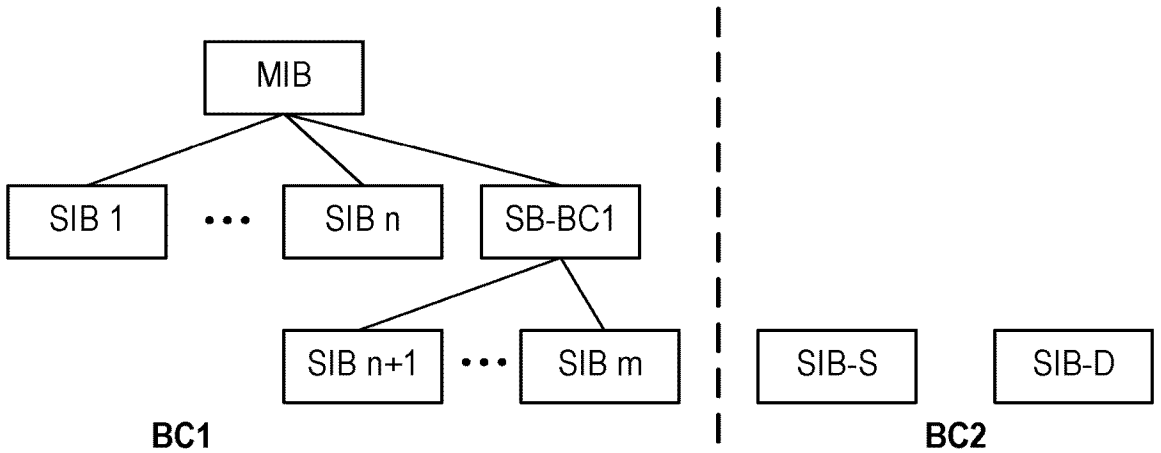


FIG. 5A

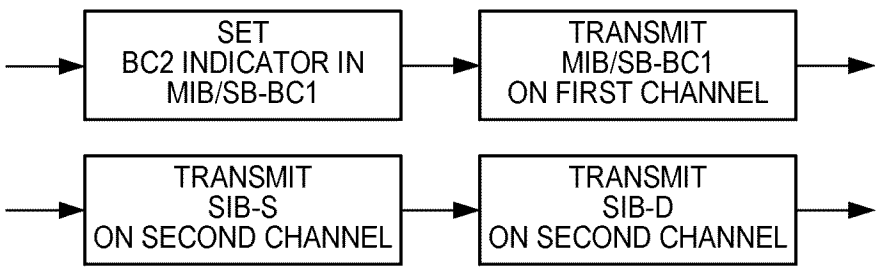


FIG. 5B

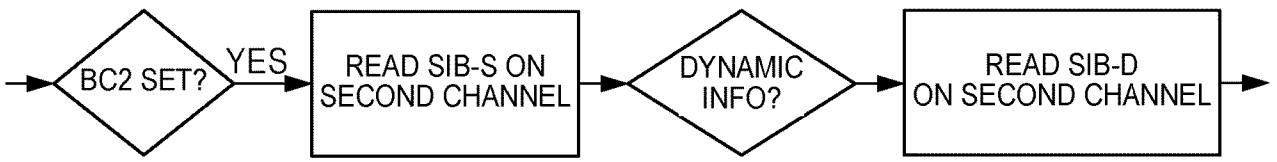


FIG. 5C

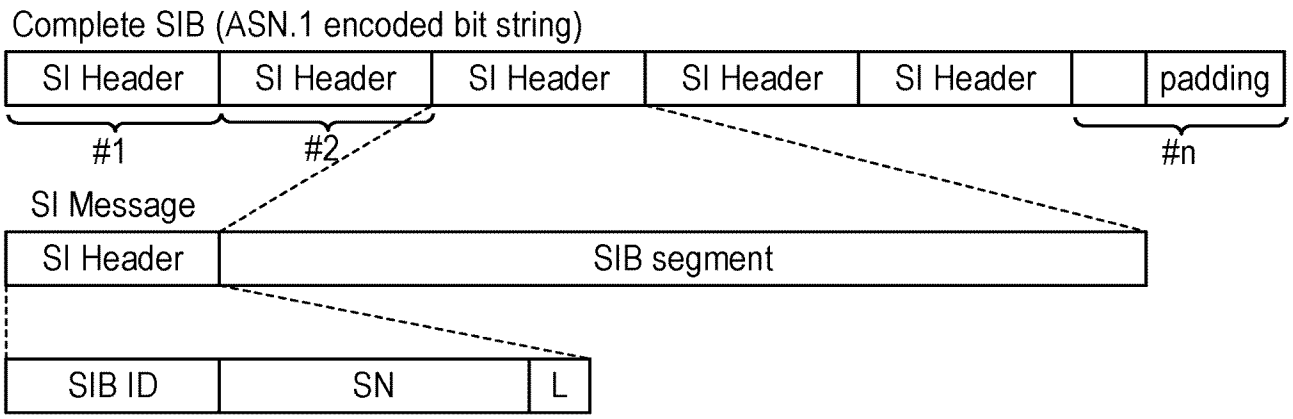


FIG. 6

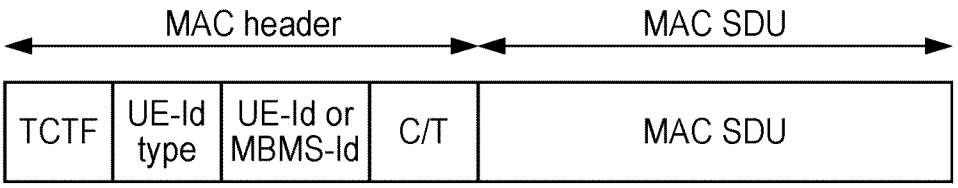


FIG. 7

TCTF	DESIGNATION
00	CCCH
01	DCCH or DTCH over RACH
10-11	Reserved (PDUs with this coding will be discarded by this version of the protocol)

FIG. 8
(PRIOR ART)

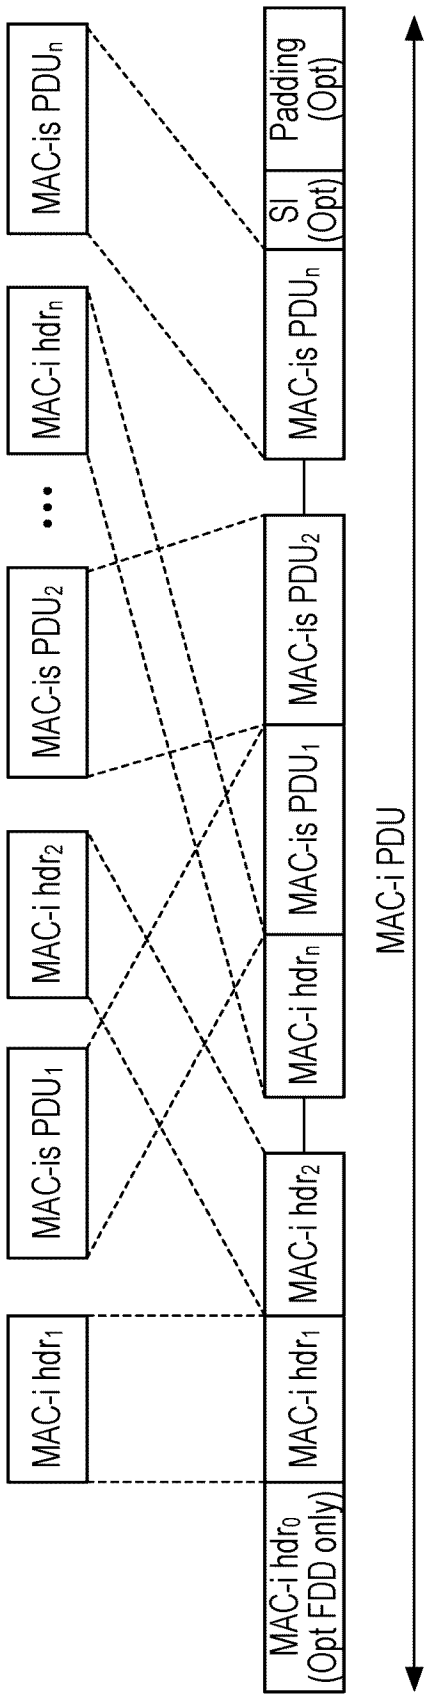


FIG. 9
(PRIOR ART)

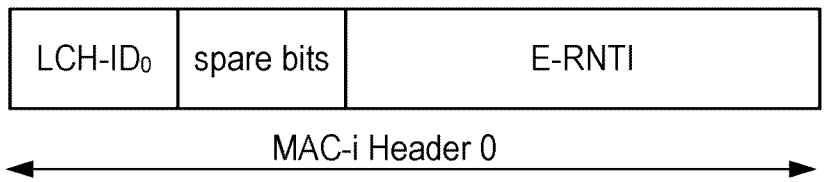


FIG. 10
(PRIOR ART)

LCH-ID Field	DESIGNATION
0000	Logical channel 1
0001	Logical channel 2
. . .	. . .
1101	Logical channel 14
1110	Identification of CCCH (SRB0)
1111	Identification of E-RNTI being included

FIG. 11
(PRIOR ART)

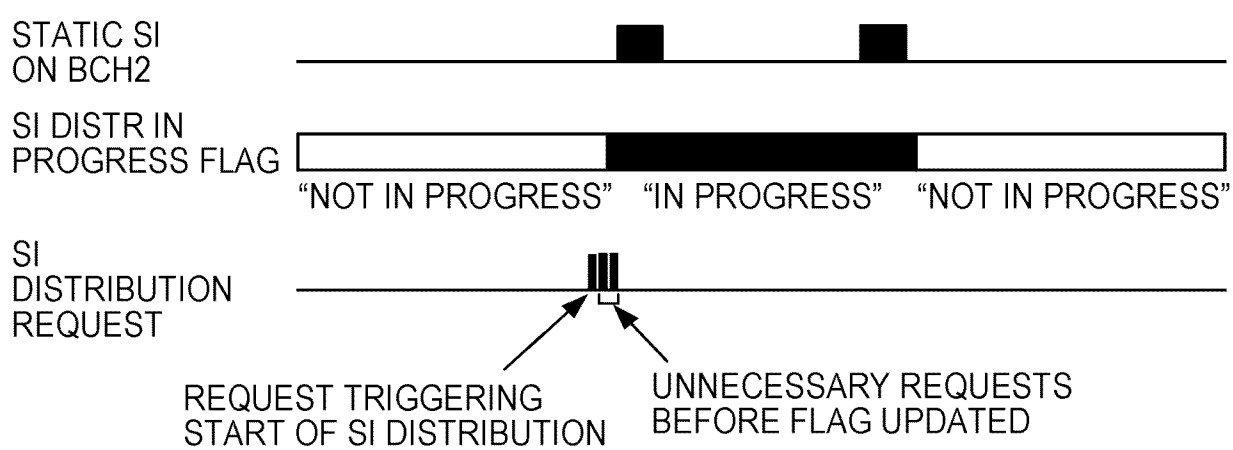


FIG. 12

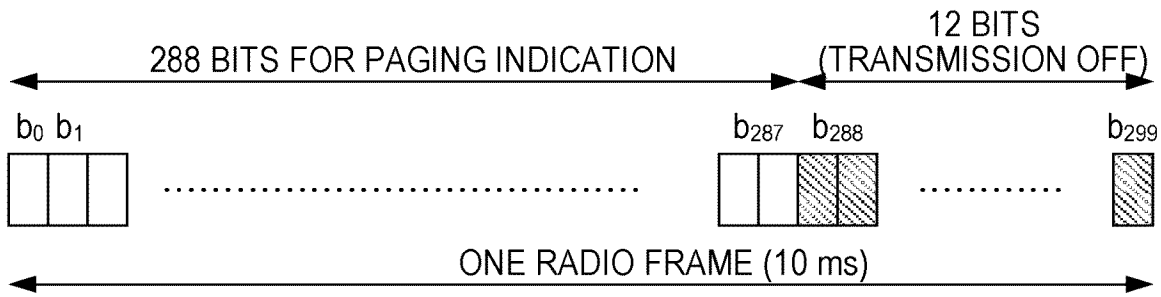


FIG. 13

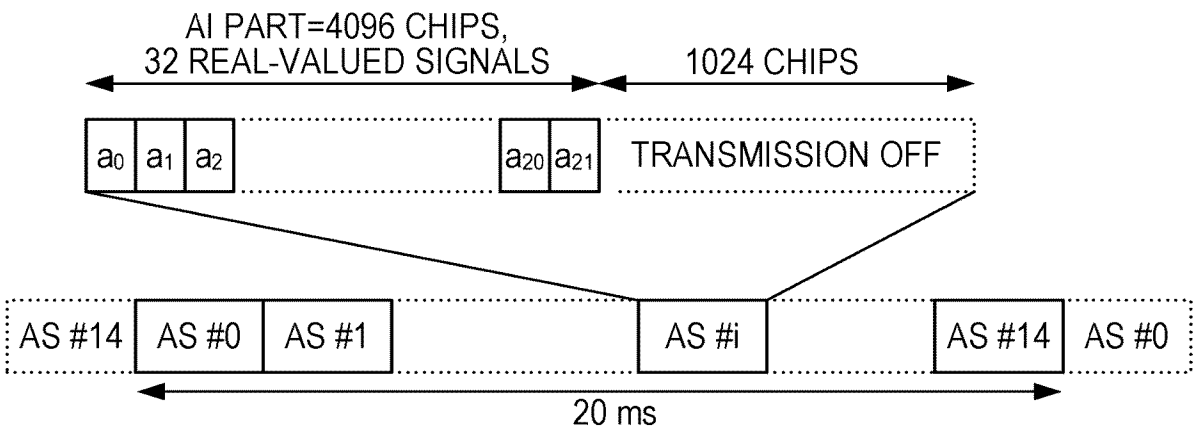


FIG. 14

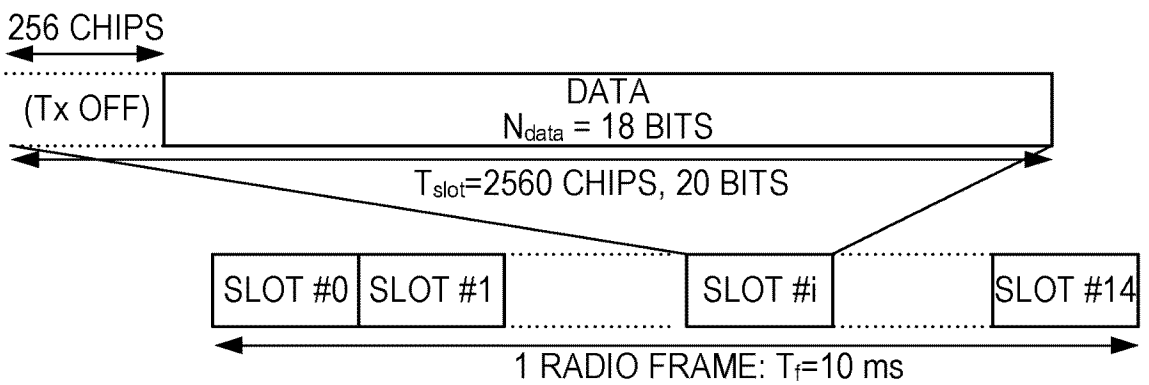


FIG. 15

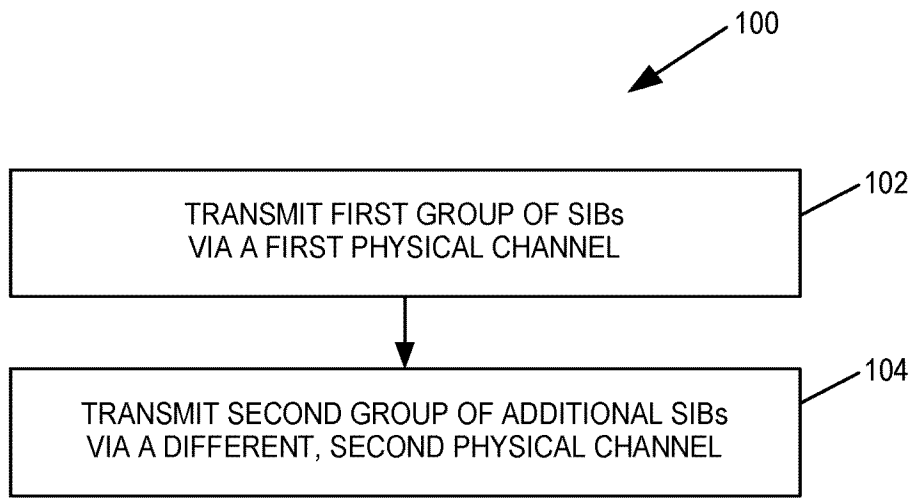

100
TRANSMIT FIRST GROUP OF SIBs VIA A FIRST PHYSICAL CHANNEL
102
TRANSMIT SECOND GROUP OF ADDITIONAL SIBs VIA A DIFFERENT, SECOND PHYSICAL CHANNEL
104

FIG. 16

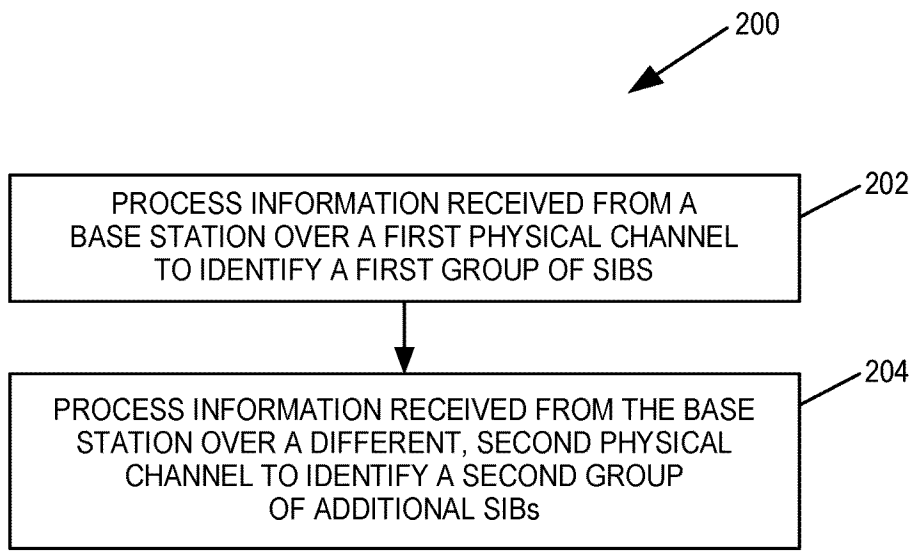

200
PROCESS INFORMATION RECEIVED FROM A BASE STATION OVER A FIRST PHYSICAL CHANNEL TO IDENTIFY A FIRST GROUP OF SIBS
202
PROCESS INFORMATION RECEIVED FROM THE BASE STATION OVER A DIFFERENT, SECOND PHYSICAL CHANNEL TO IDENTIFY A SECOND GROUP OF ADDITIONAL SIBs
204

FIG. 17

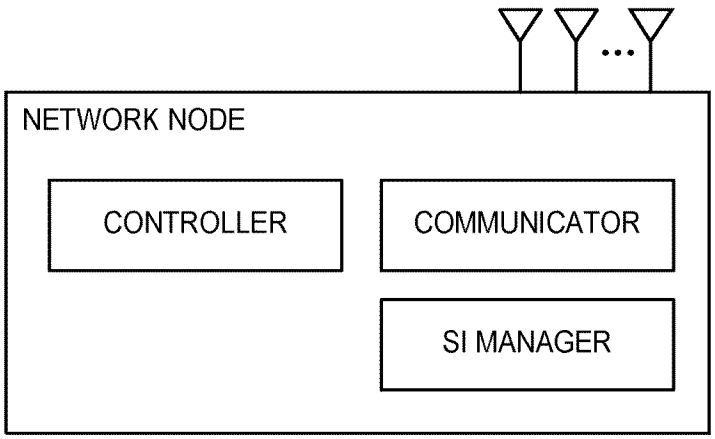


FIG. 18A

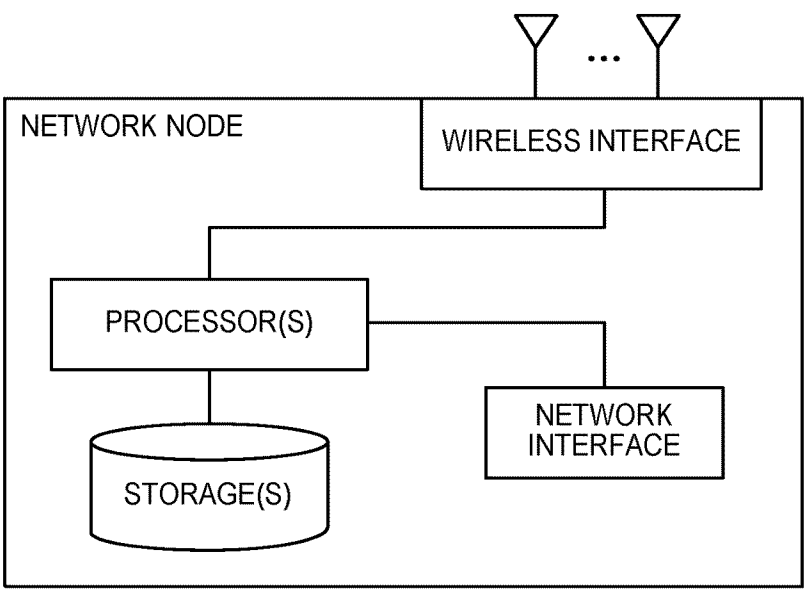


FIG. 18B

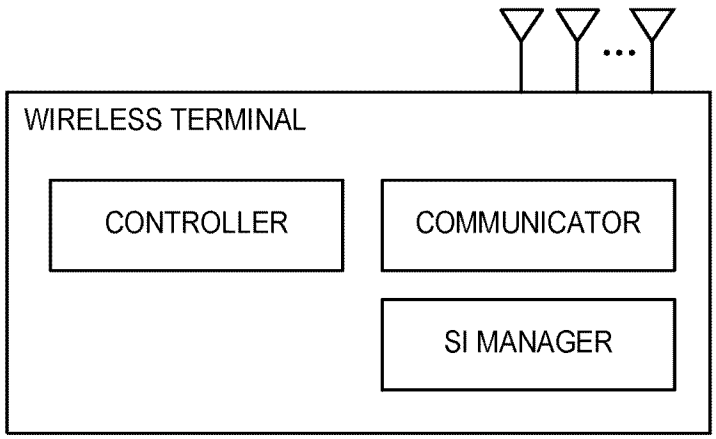


FIG. 19A

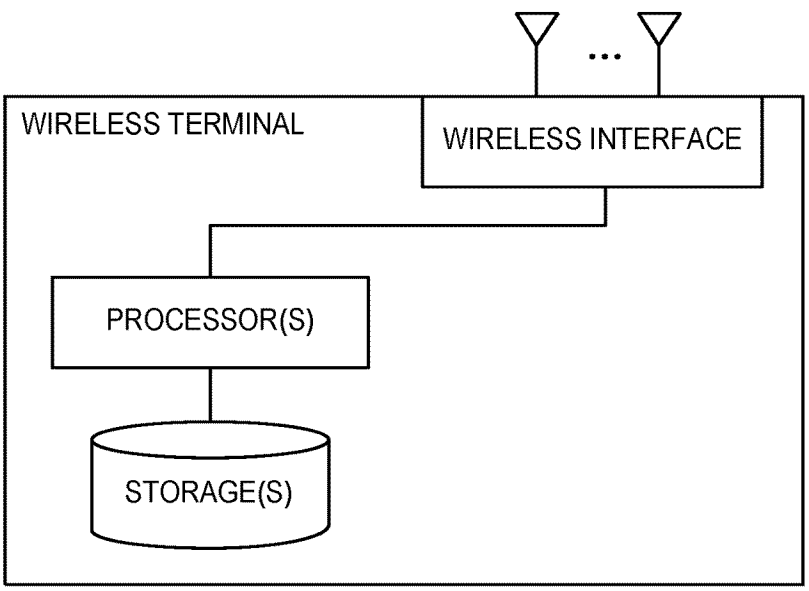


FIG. 19B

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE2014/050074

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W48/10 H04W48/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 799 003 A1 (MATSUSHITA ELECTRIC IND CO LTD [JP] PANASONIC CORP [JP]) 20 June 2007 (2007-06-20) paragraphs [0028] - [0032] pages 69-89 paragraph [0095] paragraphs [0101] - [0104] figures 10,14.15 -----	1-19
X	WO 2011/035420 A1 (RESEARCH IN MOTION LTD [CA]; FONG MO-HAN [CA]; HEO YOUN HYOUNG [CA]) 31 March 2011 (2011-03-31) paragraphs [0093] - [0098] paragraph [0162] -----	1-19

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
9 July 2014	16/07/2014

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Roberti, Vincenzo

2

Form PCT/ISA/210 (second sheet) (April 2005)

DAINGEAN_0002470

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SAMSUNG: "Downlink Channelization and Multiplexing for EUTRA", 3GPP DRAFT; R1-050604, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Sophia Antipolis, France; 20050616, 16 June 2005 (2005-06-16), XP050111419, [retrieved on 2005-06-16] the whole document -----	1-19

2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/SE2014/050074

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1799003 A1	20-06-2007	AT 458373 T	15-03-2010
		AT 525879 T	15-10-2011
		BR PI0620576 A2	16-11-2011
		CA 2627748 A1	21-06-2007
		CN 101390425 A	18-03-2009
		CN 103428813 A	04-12-2013
		EP 1799003 A1	20-06-2007
		EP 1961257 A1	27-08-2008
		EP 2378813 A1	19-10-2011
		EP 2378814 A1	19-10-2011
		ES 2369518 T3	01-12-2011
		JP 4977713 B2	18-07-2012
		JP 5060638 B2	31-10-2012
		JP 2009519636 A	14-05-2009
		JP 2011188524 A	22-09-2011
		JP 2012231500 A	22-11-2012
		KR 20080106163 A	04-12-2008
		KR 20110067174 A	21-06-2011
		RU 2010150919 A	20-06-2012
		US 2009221293 A1	03-09-2009
		US 2013208673 A1	15-08-2013
		WO 2007068304 A1	21-06-2007
WO 2011035420 A1	31-03-2011	CA 2775305 A1	31-03-2011
		CN 102907152 A	30-01-2013
		EP 2481249 A1	01-08-2012
		US 2013010619 A1	10-01-2013
		WO 2011035420 A1	31-03-2011

DAINGEAN_0002472

Electronic Patent Application Fee Transmittal

Application Number:	16597325
Filing Date:	09-Oct-2019
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Filer:	H. Warren Burnam/Linda Hull
Attorney Docket Number:	161083_1US_1035-1394

Filed as Large Entity

Filing Fees for Utility under 35 USC 111(a)

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Miscellaneous:				
RCE- 1ST REQUEST	1801	1	1300	1300
		Total in USD ($)		**1300**

Electronic Acknowledgement Receipt

EFS ID:	39674948
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	H. Warren Burnam
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	10-JUN-2020
Filing Date:	09-OCT-2019
Time Stamp:	13:12:04
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	$1300
RAM confirmation Number	E202060D12245105
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Request for Continued Examination (RCE)	161083_1US_1035-1394_RCE_transmittal.pdf	119640 5426a0fba5aad33fbfdc9b2585a1522026017224	no	1
Warnings:					
This is not a USPTO supplied RCE SB30 form.					
Information:					
2	Non Patent Literature	3GPP_36331_V1320.pdf	4187634 9822cfc953ae1324d6b25716f595fdd4de27b527	no	623
Warnings:					
Information:					
3		161083_1US_1035-1394_IDS_1449_submitting_3GPP_WO.pdf	143653 c4f7e255c9d379579659349b443e90a996ae42a4	yes	3

Multipart Description/PDF files in .zip description		
Document Description	**Start**	**End**
Information Disclosure Statement (IDS) Form (SB08)	3	3
Transmittal Letter	1	2

Warnings:					
Information:					
4	Foreign Reference	WO2014_129951.pdf	2302193 485ec5c627d3c18e99d728bb4607efc4c220fe3d	no	49
Warnings:					
Information:					
5	Fee Worksheet (SB06)	fee-info.pdf	30360 93f0204c24bfc351df524563bde7ff2e3a3169ea	no	2
Warnings:					

Information:	
Total Files Size (in bytes):	6783480

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PTO/SB/06 (09-11)
Approved for use through 1/31/2014. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875	Application or Docket Number 16/597,325	Filing Date 10/09/2019	☐ To be Mailed

ENTITY: ☑ LARGE ☐ SMALL ☐ MICRO

APPLICATION AS FILED - PART I

FOR	(Column 1) NUMBER FILED	(Column 2) NUMBER EXTRA		RATE ($)	FEE ($)
☐ BASIC FEE (37 CFR 1.16(a), (b), or (c))	N/A	N/A		N/A	
☐ SEARCH FEE (37 CFR 1.16(k), (i), or (m))	N/A	N/A		N/A	
☐ EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))	N/A	N/A		N/A	
TOTAL CLAIMS (37 CFR 1.16(i))	minus 20 =	*		x $100 =	
INDEPENDENT CLAIMS (37 CFR 1.16(h))	minus 3 =	*		x $460 =	
☐ APPLICATION SIZE FEE (37 CFR 1.16(s))	If the specification and drawings exceed 100 sheets of paper, the application size fee due is $310 ($155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).				
☐ MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))					
* If the difference in column 1 is less than zero, enter "0" in column 2.				TOTAL	

APPLICATION AS AMENDED - PART II

		(Column 1)		(Column 2)	(Column 3)			
AMENDMENT	06/10/2020	CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE ($)	ADDITIONAL FEE ($)
	Total (37 CFR 1.16(i))	* 6	Minus	** 20	= 0		x $100 =	0
	Independent (37 CFR 1.16(h))	* 4	Minus	*** 4	= 0		x $460 =	0
	☐ Application Size Fee (37 CFR 1.16(s))							
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							
							TOTAL ADD'L FEE	0

		(Column 1)		(Column 2)	(Column 3)			
AMENDMENT		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE ($)	ADDITIONAL FEE ($)
	Total (37 CFR 1.16(i))	*	Minus	**	=		x $0 =	
	Independent (37 CFR 1.16(h))	*	Minus	***	=		x $0 =	
	☐ Application Size Fee (37 CFR 1.16(s))							
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))							
							TOTAL ADD'L FEE	

* If the entry in column 1 is less than the entry in column 2, write "0" in column 3.	LIE
** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20".	/TRINA RIDDICK/
*** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3".	
The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.	

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

NOTICE OF ALLOWANCE AND FEE(S) DUE

23117 7590 07/17/2020
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

EXAMINER
HONG, DUNG

ART UNIT	PAPER NUMBER
2643	

DATE MAILED: 07/17/2020

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

TITLE OF INVENTION: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	UNDISCOUNTED	$1000	$0.00	$0.00	$1000	10/19/2020

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

HOW TO REPLY TO THIS NOTICE:

I. Review the ENTITY STATUS shown above. If the ENTITY STATUS is shown as SMALL or MICRO, verify whether entitlement to that entity status still applies.

If the ENTITY STATUS is the same as shown above, pay the TOTAL FEE(S) DUE shown above.

If the ENTITY STATUS is changed from that shown above, on PART B - FEE(S) TRANSMITTAL, complete section number 5 titled "Change in Entity Status (from status indicated above)".

For purposes of this notice, small entity fees are 1/2 the amount of undiscounted fees, and micro entity fees are 1/2 the amount of small entity fees.

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Maintenance fees are due in utility patents issuing on applications filed on or after Dec. 12, 1980. It is patentee's responsibility to ensure timely payment of maintenance fees when due. More information is available at www.uspto.gov/PatentMaintenanceFees.

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), by mail or fax, or via EFS-Web.

By mail, send to: Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

By fax, send to: (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

23117 7590 07/17/2020
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being transmitted to the USPTO via EFS-Web or by facsimile to (571) 273-2885, on the date below.

(Typed or printed name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

TITLE OF INVENTION: ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	UNDISCOUNTED	$1000	$0.00	$0.00	$1000	10/19/2020

EXAMINER	ART UNIT	CLASS-SUBCLASS
HONG, DUNG	2643	370-329000

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

❑ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.

❑ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-09 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list
(1) The names of up to 3 registered patent attorneys or agents OR, alternatively,
(2) The name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

1 _____
2 _____
3 _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document must have been previously recorded, or filed for recordation, as set forth in 37 CFR 3.11 and 37 CFR 3.81(a). Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE (B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent) : ❑ Individual ❑ Corporation or other private group entity ❑ Government

4a. Fees submitted: ❑ Issue Fee ❑ Publication Fee (if required) ❑ Advance Order - # of Copies _____

4b. Method of Payment: *(Please first reapply any previously paid fee shown above)*

❑ Electronic Payment via EFS-Web ❑ Enclosed check ❑ Non-electronic payment by credit card (Attach form PTO-2038)

❑ The Director is hereby authorized to charge the required fee(s), any deficiency, or credit any overpayment to Deposit Account No. _____

5. **Change in Entity Status** (from status indicated above)

❑ Applicant certifying micro entity status. See 37 CFR 1.29

❑ Applicant asserting small entity status. See 37 CFR 1.27

❑ Applicant changing to regular undiscounted fee status.

NOTE: Absent a valid certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.
NOTE: If the application was previously under micro entity status, checking this box will be taken to be a notification of loss of entitlement to micro entity status.
NOTE: Checking this box will be taken to be a notification of loss of entitlement to small or micro entity status, as applicable.

NOTE: This form must be signed in accordance with 37 CFR 1.31 and 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Authorized Signature _____ Date _____

Typed or printed name _____ Registration No. _____

DAINGEAN_0002480

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394	6587

23117 7590 07/17/2020

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

EXAMINER	
HONG, DUNG	

ART UNIT	PAPER NUMBER
2643	

DATE MAILED: 07/17/2020

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)
(Applications filed on or after May 29, 2000)

The Office has discontinued providing a Patent Term Adjustment (PTA) calculation with the Notice of Allowance.

Section 1(h)(2) of the AIA Technical Corrections Act amended 35 U.S.C. 154(b)(3)(B)(i) to eliminate the requirement that the Office provide a patent term adjustment determination with the notice of allowance. See Revisions to Patent Term Adjustment, 78 Fed. Reg. 19416, 19417 (Apr. 1, 2013). Therefore, the Office is no longer providing an initial patent term adjustment determination with the notice of allowance. The Office will continue to provide a patent term adjustment determination with the Issue Notification Letter that is mailed to applicant approximately three weeks prior to the issue date of the patent, and will include the patent term adjustment on the patent. Any request for reconsideration of the patent term adjustment determination (or reinstatement of patent term adjustment) should follow the process outlined in 37 CFR 1.705.

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at 1-(888)-786-0101 or (571)-272-4200.

DAINGEAN_0002481

OMB Clearance and PRA Burden Statement for PTOL-85 Part B

The Paperwork Reduction Act (PRA) of 1995 requires Federal agencies to obtain Office of Management and Budget approval before requesting most types of information from the public. When OMB approves an agency request to collect information from the public, OMB (i) provides a valid OMB Control Number and expiration date for the agency to display on the instrument that will be used to collect the information and (ii) requires the agency to inform the public about the OMB Control Number's legal significance in accordance with 5 CFR 1320.5(b).

The information collected by PTOL-85 Part B is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450. Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Notice of Allowability	Application No. 16/597,325	Applicant(s) ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	AIA (FITF) Status Yes

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☑ This communication is responsive to 06/10/2020.
   ☐ A declaration(s)/affidavit(s) under **37 CFR 1.130(b)** was/were filed on _____.

2. ☐ An election was made by the applicant in response to a restriction requirement set forth during the interview on _____; the restriction requirement and election have been incorporated into this action.

3. ☑ The allowed claim(s) is/are 1-6 . As a result of the allowed claim(s), you may be eligible to benefit from the **Patent Prosecution Highway** program at a participating intellectual property office for the corresponding application. For more information, please see **http://www.uspto.gov/patents/init_events/pph/index.jsp** or send an inquiry to **PPHfeedback@uspto.gov.**

4. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

   Certified copies:

   a) ☐ All b) ☐ Some *c) ☐ None of the:

   1. ☐ Certified copies of the priority documents have been received.
   2. ☐ Certified copies of the priority documents have been received in Application No. _____ .
   3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

   * Certified copies not received: _____ .

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.
THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

5. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
   ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date _____ .

   Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).

6. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

1. ☑ Notice of References Cited (PTO-892)
2. ☑ Information Disclosure Statements (PTO/SB/08), Paper No./Mail Date _____.
3. ☐ Examiner's Comment Regarding Requirement for Deposit of Biological Material _____.
4. ☐ Interview Summary (PTO-413), Paper No./Mail Date. _____.
5. ☐ Examiner's Amendment/Comment
6. ☑ Examiner's Statement of Reasons for Allowance
7. ☐ Other _____.

/DUNG HONG/
Primary Examiner, Art Unit 2643

REASONS FOR ALLOWANCE

The following is an examiner's statement of reasons for allowance:

Claim 1 and 3 recite method and an access node of a radio access network for performing the method that communicates over a radio interface with a wireless terminal, the access node comprising:

processor circuitry configured:

to generate a first type system information block (SIB) comprising information and a value tag, the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network;

upon a change of a second type SIB whose associated information indicated before the change that the second type SIB was provided on-demand, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast;

transmitter circuitry configured to:

transmit the first type SIB; transmit a message that triggers the wireless terminal to receive the first type SIB,

wherein whether or not the second type SIB has changed is determined based on a value tag, associated with the second type SIB, stored in the wireless

terminal, and the value tag included in the first type SIB corresponding to the second type SIB.

Claim 5-6 recite a wireless terminal and a method performed by the wireless terminal, wherein the wireless terminal is configured to be operated with the access node of claim 1.

The related prior art does not anticipate or render obvious the invention above:

- **Shi** et al. (US 20150223148 A1) discloses an access node **(Fig. 1 – network entity 104)** configured to include upon a change of content of system information, in a broadcast message comprising first system information which is broadcast from the access node, an indication of when the access node is scheduled to broadcast second system information which is not included in the first system information **(abstract, par. 0028-0029 disclose UE receiving SIB/MIB broadcasted by network entity 104 including parameter indicating change of SIB and scheduling information number of SIB segment including scheduling information for subsequent segment of SIB discussed in par. 0022, 0028, 0039, 0046, table 1).** However, the reference is silent on details about **(1)** generating a first type system information block (SIB) comprising information and a value

tag, the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network; upon a change of a second type SIB whose associated information indicated before the change that the second type SIB was provided on-demand, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast. In other words, Shi discloses method and apparatus for indicating whether system information has change so that UE can processed the system information. However, Shi does not teach the value tag indicating the change of second type system information and the second system information is normally provided on-demand would be broadcasted upon a change of a second type SIB.

- **Kubota** et al. (US 20160234759 A1) disclose method and apparatus for receiving, at a user equipment (UE), a first set of system information; determining, based at least in part on the first set of system information, that additional system information is available; transmitting a request for the additional system information; and receiving the additional system information at the UE **(abstract, Fig. 23-Fig. 24, par. 0271-0277).**

However, the reference is silent on details about **(1)** since Kubota does not discuss about first and second type of SIB.

- **Schliwa-Bertling** et al. (US 20180049024 A1) discloses transmitting paging signal to trigger device to receive broadcasted SIB **(par. 0020).** However, the reference is silent on details about **(1).**
- Other related prior art found by Examiner are listed in "Notice of Reference Cited".

As discloses above, none of the prior art anticipate the invention of claim 1, 3, 5-6 about (1) generating a first type system information block (SIB) comprising information and a value tag, the information indicating whether one or more associated second type system information blocks are provided by broadcast or on-demand, the value tag being updated upon a change of a corresponding second type SIB, the first type SIB being required for the wireless terminal to perform an initial access to the radio access network; upon a change of a second type SIB whose associated information indicated before the change that the second type SIB was provided on-demand, to include in the first type SIB the information associated with the second type SIB indicating that the second type SIB is provided by broadcast. Therefore, claim 1, 3, 5-6 and their dependent claims are allowable over prior art of record.

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance."

Contact Information

Any inquiry concerning this communication or earlier communications from the examiner should be directed to DUNG HONG whose telephone number is (571) 270-7928. The examiner can normally be reached on Monday-Friday from 8:00 am to 5:00 pm.

Examiner interviews are available via telephone, in-person, and video conferencing using a USPTO supplied web-based collaboration tool. To schedule an interview, Applicant is encouraged to use the USPTO Automated Interview Request (AIR) at http://www.uspto.gov/interviewpractice.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, JINSONG HU, can be reached on (571) 272-3965. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through

Private PAIR only. For more information about the PAIR system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

/DUNG HONG/
Primary Examiner, Art Unit 2643

Notice of References Cited	Application/Control No. 16/597,325	Applicant(s)/Patent Under Reexamination ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	Page 1 of 2

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-20180110036-A1	04-2018	Tabet; Tarik	H04W48/20	1/1
*	B	US-8837404-B2	09-2014	Cha; Jae Sun	H04L27/2602	370/329
*	C	US-8379567-B2	02-2013	Cho; Hee Jeong	H04W48/12	370/326
*	D	US-20180132165-A1	05-2018	Takahashi; Hideaki	H04W48/16	1/1
*	E	US-20090221293-A1	09-2009	Petrovic; Dragan	H04W72/005	455/450
*	F	US-20150223148-A1	08-2015	SHI; Yongsheng	H04W52/0216	370/312
*	G	US-20160234759-A1	08-2016	Kubota; Keiichi	H04W48/12	1/1
*	H	US-20160150506-A1	05-2016	Tabet; Tarik	H04W72/042	370/329
*	I	US-20160143017-A1	05-2016	YANG; Suckchel	H04W72/0406	370/329
*	J	US-20150334766-A1	11-2015	LEE; Eunjong	H04W56/002	455/426.1
*	K	US-20100227611-A1	09-2010	Schmidt; Andreas	H04W76/15	455/434
*	L	US-20110002250-A1	01-2011	Wang; Peter S.	H04W76/40	370/311
*	M	US-20190029001-A1	01-2019	WANG; Yuanyuan	H04W68/10	1/1

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Notice of References Cited	Application/Control No. 16/597,325	Applicant(s)/Patent Under Reexamination ISHII, Atsushi	
	Examiner DUNG HONG	Art Unit 2643	Page 2 of 2

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-20180049024-A1	02-2018	Schliwa-Bertling; Paul	H04W8/30	1/1
*	B	US-20170251500-A1	08-2017	AGIWAL; Anil	H04W48/12	1/1
*	C	US-20170311290-A1	10-2017	Adjakple; Pascal M.	H04W36/00	1/1
	D					
	E					
	F					
	G					
	H					
	I					
	J					
	K					
	L					
	M					

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

Index of Claims	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

✓	Rejected	-	Cancelled	N	Non-Elected	A	Appeal
=	Allowed	÷	Restricted	I	Interference	O	Objected

CLAIMS

☐ Claims renumbered in the same order as presented by applicant ☐ CPA ☑ T.D. ☐ R.1.47

CLAIM		DATE								
Final	Original	12/05/2019	03/12/2020	07/05/2020						
1	1	✓	=	=						
2	2	✓	=	=						
3	3	✓	=	=						
4	4	✓	=	=						
5	5	✓	=	=						
6	6	✓	=	=						

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

CPC						
Symbol					**Type**	**Version**
H04W	/	74	/	0833	F	2013-01-01
H04W	/	48	/	10	I	2013-01-01
H04W	/	48	/	12	I	2013-01-01
H04W	/	72	/	0446	I	2013-01-01
H04W	/	88	/	02	A	2013-01-01

CPC Combination Sets							
Symbol					**Type**	**Set**	**Ranking**	**Version**
	/		/					

NONE		Total Claims Allowed:	
(Assistant Examiner)	(Date)	6	
/DUNG HONG/ Primary Examiner, Art Unit 2643	05 July 2020	O.G. Print Claim(s)	O.G. Print Figure
(Primary Examiner)	(Date)	1	6

U.S. Patent and Trademark Office — Part of Paper No.: 20200705

DAINGEAN_0002493

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

INTERNATIONAL CLASSIFICATION				
CLAIMED				
H04W74/08	/	74	/	08
H04W48/10	/	48	/	10
H04W48/12	/	48	/	12
H04W72/04	/	72	/	04
H04W88/02	/	88	/	02

NON-CLAIMED				
	/		/	

US ORIGINAL CLASSIFICATION	
CLASS	**SUBCLASS**

CROSS REFERENCES(S)						
CLASS	**SUBCLASS (ONE SUBCLASS PER BLOCK)**					

NONE		Total Claims Allowed:	
(Assistant Examiner)	(Date)	6	
/DUNG HONG/ Primary Examiner, Art Unit 2643	05 July 2020	O.G. Print Claim(s)	O.G. Print Figure
(Primary Examiner)	(Date)	1	6

Issue Classification	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	**Art Unit**
	DUNG HONG	2643

☐ Claims renumbered in the same order as presented by applicant ☐ CPA ☑ T.D. ☐ R.1.47

CLAIMS

Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original	Final	Original
1	1														
2	2														
3	3														
4	4														
5	5														
6	6														

NONE		**Total Claims Allowed:**	
(Assistant Examiner)	(Date)	6	
/DUNG HONG/ Primary Examiner, Art Unit 2643	05 July 2020	O.G. Print Claim(s)	O.G. Print Figure
(Primary Examiner)	(Date)	1	6

U.S. Patent and Trademark Office

Part of Paper No.: 20200705

DAINGEAN_0002495

Search Notes	Application/Control No.	Applicant(s)/Patent Under Reexamination
	16/597,325	ISHII, Atsushi
	Examiner	Art Unit
	DUNG HONG	2643

CPC - Searched*		
Symbol	Date	Examiner
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

CPC Combination Sets - Searched*		
Symbol	Date	Examiner
H04W48/10, H04W72/005, H04W4/06	12/04/2019	DH
H04W48/12,H04W48/10,H04W72/042,H04W72/005,H04W74/0833	12/04/2019	DH

US Classification - Searched*			
Class	Subclass	Date	Examiner

* See search history printout included with this form or the SEARCH NOTES box below to determine the scope of the search.

Search Notes		
Search Notes	Date	Examiner
Inventor search, Google search, CPC search, Text search	12/04/2019	DH
Inventor search, Google search, CPC search, Text search	03/12/2020	DH
Inventor search, Google search, CPC search, Text search	07/05/2020	

Interference Search			
US Class/CPC Symbol	US Subclass/CPC Group	Date	Examiner
	Text search within claim	03/12/2020	DH
	Text search within claim	07/05/2020	DH

/DUNG HONG/ Primary Examiner, Art Unit 2643	

EAST Search History

EAST Search History (Prior Art)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
S1	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S2	161,282	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S3	230	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S4	161,478	S2 or S3	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:17
S5	13	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:20
S8	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:26
S9	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:29
S10	120	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:56
S11	87	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 16:56
S13	25	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 17:02
S14	18	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/18 17:02

		with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")				
S15	22	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 08:26
S16	18	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 08:28
S17	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 10:54
S20	13	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:33
S21	2	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:34
S22	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:35
S23	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 13:35
S24	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11
S25	31	S24 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11

S26	72	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:11
S27	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 15:13
S28	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/19 18:15
S29	169	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:53
S30	159	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:54
S31	200	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:54
S32	30	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 08:55
S33	13	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:42
S34	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:43
S35	27	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 09:45
S36	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2018/09/20 10:01
S37	44	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:39

		(second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)				
S38	39	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:40
S39	73	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:55
S40	989	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:58
S41	4	S39 and S40	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 13:59
S42	34	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 14:12
S43	12	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/02/11 14:31
S46	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:19
S47	6	S46 and system near3 information	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:21
S48	1	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:24

S49	1	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:26
S50	2	S46 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4 or enhanc$6) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:27
S51	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S52	164,403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S53	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S54	164,611	S52 or S53	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S55	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S56	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4).clm. and S54	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S57	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S58	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S59	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S60	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S61	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30

		extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)				
S62	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S63	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S64	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S65	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S66	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S67	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S68	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S69	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S70	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30

		second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")				
S71	35	S70 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S72	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S73	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S74	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S75	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S76	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S77	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S78	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S79	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S80	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S81	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30

S82	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S83	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S84	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S85	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S86	1,015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S87	4	S85 and S86	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S88	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S89	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/08 16:30
S92	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:12

S93	164,403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S94	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S95	164,611	S93 or S94	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S96	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4).clm. and S95	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:40
S97	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID. and (@ad<"201606028" or @rlad<"201606028")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:42
S98	0	S97 and (on$1demand or broadcast$4) with (complet$6 or extend$6 or full or extra or second) near3 (system near2 information or SIB)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 13:49
S99	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:04
S100	8	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" and @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:04
S101	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S102	164,403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S103	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S104	164,611	S93 or S94	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S105	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S106	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S107	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S108	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S109	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S110	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S111	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S112	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S113	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S114	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

		second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")				
S115	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S116	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S117	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S118	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S119	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S120	35	S119 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S121	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S122	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S123	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S124	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S125	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S126	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S127	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S128	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S129	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S130	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S131	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S132	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S133	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S134	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S135	1,015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

		updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")				
S136	4	S134 and S135	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S137	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S138	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S139	14	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S140	6	S139 and system near3 information	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S141	1	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S142	1	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S143	2	S139 and system near3 information and (extend$6 or complet$4 or request$4 or on$1demand or expand$6 or extensive$4 or enhanc$6) near3 (broadcast$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S144	1	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S145	164,403	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S146	243	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S147	164,611	S145 or S146	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S148	16	(chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S149	1	((chang$6 or updat$4) near3 ("SI" or system information) with (indicat$4 or information) with schedul$8 near3 broadcast$4).clm. and S147	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S150	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S151	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S152	143	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S153	103	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S154	31	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S155	23	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or extend$4 or second or non$1essential or specific or extra) and (version or ver) with (SI OR SIB or system information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S156	30	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S157	26	(first or primary or essential) with schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

		second or non$1essential) and (@ad<"20160628" or @rlad<"20160628") and (updat$4 or version or ver) near3 (system information or SIB OR SI)				
S158	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S159	17	wo "2008044664"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S160	3	"20100027466"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S161	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S162	3	"20100167746"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S163	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S164	35	S163 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S165	81	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S166	3	"20150223148"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S167	3	"20090221293"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S168	207	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S169	175	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S170	218	request$4 with (SIB or system information or SI) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S171	37	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S172	14	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S173	8	group$4 near2 (system information or SI OR SIB) with (value near2 tag or version or ver) with ("same" or similar) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S174	30	(group$4 or cluster$4) near2 (system information or SI OR SIB) with (value near2 tag or version or ver) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S175	3	"20160150506"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S176	49	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S177	42	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10

S178	84	(system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) near3 (transmit$6 or broadcast$4 or send$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S179	1,015	(second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S180	4	S178 and S179	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S181	40	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S182	15	(indicat$6 or flag or bit) with broadcast$4 with on$1demand with (system near2 information or sib) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/06/10 14:10
S183	7	(US-20160100422-$ | US-20100227611-$ | US-20150334766-$ | US-20160143017-$ | US-20170034074-$ | US-20170311341-$ | US-20180206139-$).DID. and (@ad<"201606028" or @rlad<"201606028")	US-PGPUB; USPAT	ADJ	ON	2019/06/10 14:44
S190	2	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 13:52
S191	258	request$4 with (SIB or system information) with (version or ver or value near2 tag)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S192	87	schedul$4 with (broadcast$4 or multi$1cast$4) with (system information or SI OR SIB) near3 (secondary or second or non$1essential) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S193	39	S192 AND ((H04W48/10 OR H04W72/005 OR H04W4/06).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42
S194	39	request$4 with (SIB or system information) with (version or ver or value near2 tag) and (@ad<"20160628" or @rlad<"20160628") and compar$6	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 18:42

		with (SIB or system information) with (version or ver or value near2 tag)				
S195	36,501	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:52
S196	37,121	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:52
S197	17	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:54
S198	7	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with request$5 and (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:57
S199	4	(system near2 information or SIB) near2 (second$4 or supplement$6 or on$1demand or full or complet$4 or extended) with request$5 and (system near2 information or SIB) near2 (primary or compact$5 or shorten$6 or brief or truncat$5) with (tag or indicat$6 or flag or bit) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 22:57
S200	3	"20180110036"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:23
S202	14	WO (2015/143244 or 2008/044664)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:30
S203	1	ep "2816741"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/04 23:30
S204	61	"8837404" or "8379567" or "20180132165" or "20090221293" or 2015/0223148 or "20160234759" or "20160150506" or "20160143017" or "20150334766" or "20100227611" or "20150223148" or "20160150506" or	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 09:27

		"20090262693" or "8538444" or "20180035468"				
S205	32	S204 and (system information and SIB)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 09:27
S206	13	S204 and (system information and SIB) near3 (second$5 or supplement$4 or extra or full or complete or extend$4 or on$1demand)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 09:46
S207	240	trigger near2 receiv$6 with (SIB or MIB or system near2 information)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:52
S208	98	trigger$4 near2 receiv$6 near3 (SIB or MIB or system near2 information) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:55
S209	18	trigger$4 near2 receiv$6 near3 (SIB or MIB or system near2 information) with (UE or terminal or equipment or "MS" or phone or smart$1phone) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 13:56
S210	61	"8837404" or "8379567" or "20180132165" or "20090221293" or 2015/0223148 or "20160234759" or "20160150506" or "20160143017" or "20150334766" or "20100227611" or "20150223148" or "20160150506" or "20090262693" or "8538444" or "20180035468"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:42
S211	46	S210 AND ((H04W48/12 OR H04W48/10 OR H04W72/042 OR H04W72/005 OR H04W74/0833).CPC.)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:44
S212	7	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:55
S213	166,520	SHARP.as.	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
S214	263	ISHII near3 Atsushi	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57

S215	166,745	S213 or S214	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
S216	1	S212 and S215	US-PGPUB; USPAT; DERWENT	ADJ	ON	2019/12/05 14:57
S218	560	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) with (supplement or full or complete or extend$4) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 13:56
S219	2,298	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) with (supplement or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 13:57
S220	1,371	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near4 (supplement or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 13:59
S221	1,247	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near3 (supplement or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 13:59
S222	1,146	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 14:01
S223	69	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628") and (broadcast$4 or multicast$4) with (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 14:01
S224	35	(flag or indicat$4 or notif$8 or bit) with (on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 14:04

		or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628") and (broadcast$4 or multicast$4) with (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3)				
S225	35	(flag or indicat$4 or notif$8 or bit) with (on$1demand or request$4) near4 (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3) and (@ad<"20160628" or @rlad<"20160628") and (broadcast$4 or multicast$4) with (SIB or (system near2 information) or SI) near2 (supplement$3 or full or complete or extend$4 or change or update$3)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 15:00
S226	17	(US-20160150506-$ or US-20110002250-$ or US-20100167746-$ or US-20150382284-$ or US-20180132165-$ or US-20160219495-$ or US-20100027466-$ or US-20150223148-$ or US-20090221293-$ or US-20160234759-$ or US-20180110036-$ or US-20160143017-$ or US-20190029001-$ or US-20180049024-$ or US-20170251500-$).did. or (US-8412211-$ or US-9967805-$).did.	US-PGPUB; USPAT	ADJ	ON	2020/03/12 15:23
S227	5	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) same (broadcast$4 or multicast$4) and S226	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 15:24
S228	2	(on$1demand or request$4) near4 (SIB or (system near2 information) or SI) same (broadcast$4 or multicast$4) same (chang$4 or updat$4 or full or complete$4) and S226	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 15:26
S234	3	"15659060"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/03/12 17:44
S235	6	wo "2014129951"	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:09
S236	3	US "20150382284" A1	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:11

S237	614	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) with broadcast$4 with (flag or indicat$4 or bit or notif$8)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:18
S238	419	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) with broadcast$4 with (flag or indicat$4 or bit or notif$8) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:19
S239	890	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) with (request$4 or on$1demand$4) and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:20
S240	383	(first or primary or essential) near3 ("SI" or system information or SIB) and S237	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:20
S241	419	S237 and S238	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:20
S242	555	S240 or S241	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:21
S243	131	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) near3 (chang$6 or updat$4 or version or ver or "new") and S242	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:22
S244	76	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) near3 (chang$6 or updat$4 or version or ver or "new") with (first or primary or essential) and S242	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 16:26
S245	614	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) with broadcast$4 with (flag or indicat$4 or bit or notif$8)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25
S246	419	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) with broadcast$4 with (flag or indicat$4 or bit or notif$8)	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25

		and (@ad<"20160628" or @rlad<"20160628")				
S247	383	(first or primary or essential) near3 ("SI" or system information or SIB) and S245	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25
S248	419	S245 and S246	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25
S249	555	S247 or S248	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25
S250	76	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) near3 (chang$6 or updat$4 or version or ver or "new") with (first or primary or essential) and S249	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:25
S251	47	(second$5 or extend$4 or complet$5 or supplement$5 or non$1essential or specific or extra) near3 ("SI" or system information or SIB) near3 (chang$6 or updat$4 or version or ver or "new") with (first or primary or essential) and S249 and (@ad<"20160628" or @rlad<"20160628")	US-PGPUB; USPAT; DERWENT	ADJ	ON	2020/07/05 20:51

EAST Search History (Interference)

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L2	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/07/06 00:03
S44	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/02/11 13:39
S45	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/02/11 14:39
S90	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3	USPAT	ADJ	ON	2019/06/08 16:30

		(system information or SIB) with (chang$6 or updat$4 or new)).clm.				
S91	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/08 16:30
S184	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S185	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S186	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S187	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:10
S188	2	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2019/06/10 14:51
S189	0	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2019/06/10 14:51
S229	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/03/12 15:16
S230	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/03/12 15:16
S231	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/03/12 15:16
S232	3	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4	USPAT	ADJ	ON	2020/03/12 15:17

		or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.				
S233	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/03/12 15:17
S252	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/07/05 19:48
S253	3	((system near2 information or SIB) with (initial$6 or primary or core) with (flag or indicat$6 or bit or notif$8) with (second$4 or supplement$6 or on$1demand) and (second$4 or supplement$6 or on$1demand) near3 (system information or SIB) with (chang$6 or updat$4 or new)).clm.	USPAT	ADJ	ON	2020/07/05 19:48
S254	2	((on$1demand near4 broadcast$4) with (indicator or bit or notif$8) with (system near2 information or sib)).clm.	USPAT	ADJ	ON	2020/07/05 19:48

7/6/2020 12:04:14 AM
C:\Users\dhong\Documents\EAST\Workspaces\597325-16.wsp

INFORMATION DISCLOSURE CITATION

ATTY. DOCKET NO.	APPLICATION NO.
HWB-1035-1394	16/597,325

INVENTOR(S)

ISHII

(Use several sheets if necessary)

FILING DATE	ART UNIT
10/09/2019	2643

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2014/129951 A1	8-2014	WIPO/PCT				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		3GPP TS 36.331 V13.2.0, Technical Specification, 3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (Release 13) (2016-06)

*Examiner	/DUNG HONG/	Date Considered	07/06/2020

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

All References Considered Except Where Lined Through. /D.H/

3013218

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Jul 17, 2020 03:45:18 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	NOA	07/17/2020	161083_1US_1035-1394
	892	07/17/2020	161083_1US_1035-1394
	1449	07/17/2020	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

Doc Code: PA
Document Description: Power of Attorney

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5, unless the application number and filing date are identified in the Power of Attorney by Applicant form. If neither form PTO/AIA/82A nor form PTO/AIA82B identifies the application to which the Power of Attorney is directed, the Power of Attorney will not be recognized in the application.

Application Number	16/597,325
Filing Date	October 9, 2019
First Named Inventor	ISHII, Atsushi
Title	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
Art Unit	2643
Examiner Name	Hong, D.
Attorney Docket Number	161083_1US_1035-1394

SIGNATURE of Applicant or Patent Practitioner

Signature	/H. Warren Burnam, Jr./	Date (Optional)	July 23, 2020
Name	H. Warren Burnam, Jr.	Registration Number	29,366
Title (if Applicant is a juristic entity)			
Applicant Name (if Applicant is a juristic entity)			

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications. If more than one applicant, use multiple forms.

*Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS.
SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of	Confirmation No.: 6587
ISHII	Atty. Ref.: 161083_1US_1035-1394
Appln. No. 16/597,325	Art Unit: 2643
Filed: 10/09/2019	Examiner: HONG, DUNG

For: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

* * * * * * * * * * *

July 23, 2020

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

REQUEST FOR CORRECTION OF FILING RECEIPT

Applicant respectfully requests issuance of a corrected filing receipt for the above-referenced application reflecting the corrections identified in the application data sheet submitted herewith.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: /H. Warren Burnam, Jr./
H. Warren Burnam, Jr.
Reg. No. 29,366

HWB:lsh
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82B (07-13)
Approved for use through 01/31/2018. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)

☑ I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above: 23117

OR

☐ I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:

☑ The address associated with the above-mentioned Customer Number

OR

☐ The address associated with Customer Number:

OR

☐ Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box):

SHARP KABUSHIKI KAISHA

☐ Inventor or Joint Inventor (title not required below)

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)

☑ Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)

☐ Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature	Mototaka Taneya	Date (Optional)	
Name	Mototaka TANEYA		
Title	Managing Officer, BU President, Corporate Research & Development BU; Sharp Kabushiki Kaisha		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.

☐ Total of forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82B (07-13)
Approved for use through 01/31/2018. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)

[X] I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above: 23117

OR

[ ] I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:

[X] The address associated with the above-mentioned Customer Number

OR

[ ] The address associated with Customer Number:

OR

[ ] Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box):

FG Innovation Company Limited

[ ] Inventor or Joint Inventor (title not required below)
[ ] Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)
[✓] Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)
[ ] Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature	Chie Ming Chou	Date (Optional)	
Name	CHIE-MING CHOU		
Title	CEO		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.

[✓] Total of 3 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT UNDER 37 CFR 3.73(c)

Applicant/Patent Owner: Sharp Kabushiki Kaisha

Application No./Patent No.: 16/597,325 Filed/Issue Date: 10/09/2019

Titled: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

Sharp Kabushiki Kaisha, a corporation

(Name of Assignee) (Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that, for the patent application/patent identified above, it is (choose **one** of options 1, 2, 3 or 4 below):

1. ☐ The assignee of the entire right, title, and interest.

2. ☑ An assignee of less than the entire right, title, and interest (check applicable box):

   ☐ The extent (by percentage) of its ownership interest is _____%. Additional Statement(s) by the owners holding the balance of the interest must be submitted to account for 100% of the ownership interest.

   ☑ There are unspecified percentages of ownership. The other parties, including inventors, who together own the entire right, title and interest are:

   FG Innovation Company Limited

   Additional Statement(s) by the owner(s) holding the balance of the interest must be submitted to account for the entire right, title, and interest.

3. ☐ The assignee of an undivided interest in the entirety (a complete assignment from one of the joint inventors was made). The other parties, including inventors, who together own the entire right, title, and interest are:

   Additional Statement(s) by the owner(s) holding the balance of the interest must be submitted to account for the entire right, title, and interest.

4. ☐ The recipient, via a court proceeding or the like (*e.g.*, bankruptcy, probate), of an undivided interest in the entirety (a complete transfer of ownership interest was made). The certified document(s) showing the transfer is attached.

The interest identified in option 1, 2 or 3 above (not option 4) is evidenced by either (choose **one** of options A or B below):

A. ☐ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the United States Patent and Trademark Office at Reel _____, Frame _____, or for which a copy thereof is attached.

B. ☑ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as follows:

1. From: Atsushi ISHII To: Sharp Laboratories of America, Inc.

   The document was recorded in the United States Patent and Trademark Office at
   Reel 050694, Frame 0685, or for which a copy thereof is attached.

2. From: Sharp Laboratories of America, Inc. To: Sharp Kabushiki Kaisha

   The document was recorded in the United States Patent and Trademark Office at
   Reel 050694, Frame 0688, or for which a copy thereof is attached.

This collection of information is required by 37 CFR 3.73(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT UNDER 37 CFR 3.73(c)

3. From: Sharp Kabushiki Kaisha To: Sharp Kabushiki Kaisha and FG Innovation Company Limited

The document was recorded in the United States Patent and Trademark Office at
Reel 053239, Frame 0627, or for which a copy thereof is attached.

4. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

5. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

6. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet(s).

☑ As required by 37 CFR 3.73(c)(1)(i), the documentary evidence of the chain of title from the original owner to the assignee was, or concurrently is being, submitted for recordation pursuant to 37 CFR 3.11.

[NOTE: A separate copy (i.e., a true copy of the original assignment document(s)) must be submitted to Assignment Division in accordance with 37 CFR Part 3, to record the assignment in the records of the USPTO. See MPEP 302.08]

The undersigned (whose title is supplied below) is authorized to act on behalf of the assignee.

/H. Warren Burnam, Jr./	July 23, 2020
Signature	Date
H. Warren Burnam, Jr.	29,366
Printed or Typed Name	Title or Registration Number

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT UNDER 37 CFR 3.73(c)

Applicant/Patent Owner: FG Innovation Company Limited

Application No./Patent No.: 16/597,325 Filed/Issue Date: 10/09/2019

Titled: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

FG Innovation Company Limited, a corporation

(Name of Assignee) (Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that, for the patent application/patent identified above, it is (choose **one** of options 1, 2, 3 or 4 below):

1. ☐ The assignee of the entire right, title, and interest.

2. ☑ An assignee of less than the entire right, title, and interest (check applicable box):

   ☐ The extent (by percentage) of its ownership interest is _____%. Additional Statement(s) by the owners holding the balance of the interest must be submitted to account for 100% of the ownership interest.

   ☑ There are unspecified percentages of ownership. The other parties, including inventors, who together own the entire right, title and interest are:

   Sharp Kabushiki Kaisha

   Additional Statement(s) by the owner(s) holding the balance of the interest must be submitted to account for the entire right, title, and interest.

3. ☐ The assignee of an undivided interest in the entirety (a complete assignment from one of the joint inventors was made). The other parties, including inventors, who together own the entire right, title, and interest are:

   Additional Statement(s) by the owner(s) holding the balance of the interest must be submitted to account for the entire right, title, and interest.

4. ☐ The recipient, via a court proceeding or the like (*e.g.*, bankruptcy, probate), of an undivided interest in the entirety (a complete transfer of ownership interest was made). The certified document(s) showing the transfer is attached.

The interest identified in option 1, 2 or 3 above (not option 4) is evidenced by either (choose **one** of options A or B below):

A. ☐ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the United States Patent and Trademark Office at Reel _____, Frame _____, or for which a copy thereof is attached.

B. ☑ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as follows:

1. From: Atsushi ISHII To: Sharp Laboratories of America, Inc.

   The document was recorded in the United States Patent and Trademark Office at
   Reel 050694, Frame 0685, or for which a copy thereof is attached.

2. From: Sharp Laboratories of America, Inc. To: Sharp Kabushiki Kaisha

   The document was recorded in the United States Patent and Trademark Office at
   Reel 050694, Frame 0688, or for which a copy thereof is attached.

This collection of information is required by 37 CFR 3.73(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

PTO/AIA/96 (08-12)
Approved for use through 01/31/2013. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT UNDER 37 CFR 3.73(c)

3. From: Sharp Kabushiki Kaisha To: Sharp Kabushiki Kaisha and FG Innovation Company Limited

The document was recorded in the United States Patent and Trademark Office at
Reel 053239, Frame 0627, or for which a copy thereof is attached.

4. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

5. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

6. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet(s).

☑ As required by 37 CFR 3.73(c)(1)(i), the documentary evidence of the chain of title from the original owner to the assignee was, or concurrently is being, submitted for recordation pursuant to 37 CFR 3.11.

[NOTE: A separate copy (i.e., a true copy of the original assignment document(s)) must be submitted to Assignment Division in accordance with 37 CFR Part 3, to record the assignment in the records of the USPTO. See MPEP 302.08]

The undersigned (whose title is supplied below) is authorized to act on behalf of the assignee.

/H. Warren Burnam, Jr./	July 23, 2020
Signature	Date
H. Warren Burnam, Jr.	29,366
Printed or Typed Name	Title or Registration Number

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

ISHII

Appln. No. 16/597,325

Filed: 10/09/2019

Confirmation No.: 6587

Atty. Ref.: 161083_1US_1035-1394

Art Unit: 2643

Examiner: HONG, DUNG

For: AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

* * * * * * * * * * *

July 23, 2020

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

STATEMENT ACCOMPANYING 3.73C STATEMENT

SHARP KABUSHIKI KAISHA and FG INNOVATION COMPANY LIMITED together own all the entire right, title and interest of the referenced application.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: /H. Warren Burnam, Jr./
H. Warren Burnam, Jr.
Reg. No. 29,366

HWB:lsh
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

Electronic Acknowledgement Receipt

EFS ID:	40090141
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	H. Warren Burnam
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	23-JUL-2020
Filing Date:	09-OCT-2019
Time Stamp:	17:50:52
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	161083_1US_1035-1394_corrected_ADS_7_23.pdf	106066 01cf0d3e0e112979d8545945c2fbc651abf26e30	no	2

Warnings:

Information:					
This is not an USPTO supplied ADS fillable form					
2	Request for Corrected Filing Receipt	161083_1US_1035-1394_req_corr_of_filing_rec.pdf	91652 5fa7f625d9be1b931c564de401c2aae1c38b2afe	no	1
Warnings:					
Information:					
3	Power of Attorney	161083_1US_1035-1394_POA_trans_7_23.pdf	98179 3b6d3b1b86980f6ec5098077f4dba90bf96c5839	no	1
Warnings:					
Information:					
4	Power of Attorney	201804_SHARP_POA_NV_23117.pdf	105548 e9cb0c9bbdf3eddabf5620f28ae6c10b8c4880c4	no	1
Warnings:					
Information:					
5	Power of Attorney	FG_Innovation_POA_23117_Customer_No.pdf	297922 af71b255be1514bda485f70dc024794ef2855d7f	no	1
Warnings:					
Information:					
6	Assignee showing of ownership per 37 CFR 3.73	161083_1US_1035-1394_SKK_373c_Statement.pdf	122081 0513a42a136b18f678849af12b97a9018ef11516	no	3
Warnings:					
Information:					
7	Assignee showing of ownership per 37 CFR 3.73	161083_1US_1035-1394_FG_373c_Statement.pdf	122124 2c67eecbf1e36c5a9711126e8ac1d3bad1ff51b2	no	3
Warnings:					
Information:					
8	Miscellaneous Incoming Letter	161083_1US_1035-1394_statement_accompnaying_373c_statement.pdf	92375 650802f768d13ffb0cefb3bb11cb66b1baf5ef13	no	1
Warnings:					
Information:					

Total Files Size (in bytes):	1035947

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	161083_1US_1035-1394
	Application Number	16/597,325
Title of Invention	AN ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL	

The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.
This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant 1

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

☒ Assignee	☐ Legal Representative under 35 U.S.C. 117	☐ Joint Inventor
☐ Person to whom the inventor is obligated to assign.	☐ Person who shows sufficient proprietary interest	

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor :	

If the Applicant is an Organization check here. ☒

Organization Name:	Sharp Kabushiki Kaisha			
Prefix	Given Name	Middle Name	Family Name	Suffix

Mailing Address Information For Applicant 1:

Address 1	1 Takumi-cho, Sakai-ku		
Address 2			
City	Sakai City, Osaka	State/Province	
Country	Japan	Postal Code	590-8522
Phone Number		Fax Number	
Email Address			

Applicant 2

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

☒ Assignee	☐ Legal Representative under 35 U.S.C. 117	☐ Joint Inventor
☐ Person to whom the inventor is obligated to assign.	☐ Person who shows sufficient proprietary interest	

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor :	

If the Applicant is an Organization check here. ☒

Organization Name:	FG INNOVATION COMPANY LIMITED

Prefix	Given Name	Middle Name	Family Name	Suffix

Mailing Address Information For Applicant 2:

Address 1	FLAT 2623, 26/F, TUEN MUN CENTRAL SQUARE		
Address 2	22 HOI WING ROAD		
City	TUEN MUN, NEW TERRITORIES	State/Province	
Country	HK	Postal Code	
Phone Number		Fax Number	
Email Address			

Signature:

NOTE: This Application Data Sheet must be signed in accordance with 37 CFR 1.33(b). **However, if this Application Data Sheet is submitted with the INITIAL filing of the application and either Box A or B is not checked in subsection 2 of the "Authorization or Opt-Out of Authorization to Permit Access" section, then this form must also be signed in accordance with 37 CFR 1.14(c).**

This Application Data Sheet **must** be signed by a patent practitioner if one or more of the applicants is a **juristic entity** (e.g., corporation or association). If the applicant is two or more joint inventors, this form must be signed by a patent practitioner, **all** joint inventors who are the applicant, or one or more joint inventor-applicants who have been given power of attorney (e.g., see USPTO Form PTO/AIA/81) on behalf of **all** joint inventor-applicants.

See 37 CFR 1.4(d) for the manner of making signatures and certifications.

Signature	/H. Warren Burnam, Jr./	Date (MM/DD/YYYY)	7/23/2020
First Name/Last Name	H. Warren Burnam, Jr.	Registration Number	29,366

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394

CONFIRMATION NO. 6587

23117
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

POA ACCEPTANCE LETTER

OC000000118708246

Date Mailed: 07/27/2020

NOTICE OF ACCEPTANCE OF POWER OF ATTORNEY

This is in response to the Power of Attorney filed 07/23/2020.

The Power of Attorney in this application is accepted. Correspondence in this application will be mailed to the above address as provided by 37 CFR 1.33.

Questions about the contents of this notice and the requirements it sets forth should be directed to the Office of Data Management, Application Assistance Unit, at **(571) 272-4000** or **(571) 272-4200** or **1-888-786-0101**.

/cbowen/

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY.DOCKET.NO	TOT CLAIMS	IND CLAIMS
16/597,325	10/09/2019	2643	2180	161083_1US_1035-1394	6	4

CONFIRMATION NO. 6587

CORRECTED FILING RECEIPT

23117
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

OC000000118708459

Date Mailed: 07/27/2020

Receipt is acknowledged of this non-provisional utility patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF FIRST INVENTOR, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection.

Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please submit a written request for a corrected Filing Receipt, including a properly marked-up ADS showing the changes with strike-through for deletions and underlining for additions. If you received a "Notice to File Missing Parts" or other Notice requiring a response for this application, please submit any request for correction to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections provided that the request is grantable.

Inventor(s)

Atsushi ISHII, Vancouver, WA;

Applicant(s)

SHARP KABUSHIKI KAISHA, Sakai City, JAPAN;
FG Innovation Company Limited, Hong Kong, HONG KONG;

Power of Attorney: The patent practitioners associated with Customer Number 23117

Domestic Priority data as claimed by applicant

This application is a CON of 15/659,060 07/25/2017 PAT 10462823
which claims benefit of 62/368,126 07/28/2016

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see http://www.uspto.gov for more information.) - None.
Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access Application via Priority Document Exchange: Yes

Permission to Access Search Results: Yes

Applicant may provide or rescind an authorization for access using Form PTO/SB/39 or Form PTO/SB/69 as appropriate.

If Required, Foreign Filing License Granted: 10/24/2019

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 16/597,325**

Projected Publication Date: Not Applicable

Non-Publication Request: No

Early Publication Request: No

Title

ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL

Preliminary Class

370

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at http://www.uspto.gov/web/offices/pac/doc/general/index.html.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, http://www.stopfakes.gov. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER

Title 35, United States Code, Section 184

Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign AssetsControl, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop technology, manufacture products, deliver services, and grow your business, visit http://www.SelectUSA.gov or call +1-202-482-6800.

To: PTOMAIL@nixonvan.com,pair_nixon@firsttofile.com,
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 23117

Jul 27, 2020 03:58:19 AM

Dear PAIR Customer:

NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 23117 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	N570	07/27/2020	161083_1US_1035-1394
	APP.FILE.REC	07/27/2020	161083_1US_1035-1394

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82A (07-13)
Approved for use through 01/31/2018. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5, unless the application number and filing date are identified in the Power of Attorney by Applicant form. If neither form PTO/AIA/82A nor form PTO/AIA82B identifies the application to which the Power of Attorney is directed, the Power of Attorney will not be recognized in the application.

Application Number	16/597325
Filing Date	10/09/2019
First Named Inventor	Atsushi ISHII
Title	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
Art Unit	2643
Examiner Name	HONG, DUNG
Attorney Docket Number	US82724

SIGNATURE of Applicant or Patent Practitioner

Signature	/Alvin Koan/	Date (Optional)	2020-10-12
Name	Alvin Koan	Registration Number	68468
Title (if Applicant is a juristic entity)			
Applicant Name (if Applicant is a juristic entity)	SHARP KABUSHIKI KAISHA, FG INNOVATION COMPANY LIMITED		

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications. If more than one applicant, use multiple forms.

☐ *Total of _____ forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82B (07-13)
Approved for use through 11/30/2014. OMB 0651-0051
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)

☑ I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above: 145688

OR

☐ I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:

☑ The address associated with the above-mentioned Customer Number

OR

☐ The address associated with Customer Number:

OR

Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box):

SHARP KABUSHIKI KAISHA

☐ Inventor or Joint Inventor (title not required below)

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)

☑ Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)

☐ Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature	/Mototaka Taneya/	Date (Optional)	
Name	Mototaka Taneya		
Title	MANAGING OFFICER BU PRESIDENT CORPORATE RESEARCH & DEVELOPMENT		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.

☐ Total of forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

83320 2020/07/29 09:29:03

Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82B (07-13)
Approved for use through 03/31/2021. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)

☑ I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above: 145688

OR

☐ I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:

☑ The address associated with the above-mentioned Customer Number

OR

☐ The address associated with Customer Number:

OR

☐ Firm or Individual Name					
Address					
City		State		Zip	
Country					
Telephone		Email			

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box)

FG Innovation Company Limited

☐ Inventor or Joint Inventor (title not required below)

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)

☑ Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)

☐ Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature	Chie Ming Chou	Date (Optional)	2020-07-29
Name	CHIE-MING CHOU		
Title	CEO		

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.

☑ Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Electronic Acknowledgement Receipt

EFS ID:	40822882
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	23117
Filer:	Alvin Sean Koan
Filer Authorized By:	
Attorney Docket Number:	161083_1US_1035-1394
Receipt Date:	13-OCT-2020
Filing Date:	09-OCT-2019
Time Stamp:	01:22:45
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	no

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Power of Attorney	US82724201012POA.pdf	1265673 bdfd704bcac4c411e81f45ae814f2d9b69f77933	no	3

Warnings:

Information:	
Total Files Size (in bytes):	1265673

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
16/597,325	10/09/2019	Atsushi ISHII	US82724

CONFIRMATION NO. 6587

POA ACCEPTANCE LETTER

145688
SBPJ/ScienBiziP, P.C.
550 South Hope Street
Suite 2825
Los Angeles, CA 90071

OC000000120621560

Date Mailed: 10/15/2020

NOTICE OF ACCEPTANCE OF POWER OF ATTORNEY

This is in response to the Power of Attorney filed 10/13/2020.

The Power of Attorney in this application is accepted. Correspondence in this application will be mailed to the above address as provided by 37 CFR 1.33.

Questions about the contents of this notice and the requirements it sets forth should be directed to the Office of Data Management, Application Assistance Unit, at **(571) 272-4000** or **(571) 272-4200** or **1-888-786-0101**.

/cbowen/

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
16/597,325	10/09/2019	Atsushi ISHII	161083_1US_1035-1394

CONFIRMATION NO. 6587

POWER OF ATTORNEY NOTICE

23117
NIXON & VANDERHYE, PC
901 NORTH GLEBE ROAD, 11TH FLOOR
ARLINGTON, VA 22203

OC000000120621438

Date Mailed: 10/15/2020

NOTICE REGARDING CHANGE OF POWER OF ATTORNEY

This is in response to the Power of Attorney filed 10/13/2020.

- The Power of Attorney to you in this application has been revoked by the assignee who has intervened as provided by 37 CFR 3.71. Future correspondence will be mailed to the new address of record(37 CFR 1.33).

Questions about the contents of this notice and the requirements it sets forth should be directed to the Office of Data Management, Application Assistance Unit, at **(571) 272-4000** or **(571) 272-4200** or **1-888-786-0101**.

/cbowen/

DAINGEAN_0002551

To: eoa-proce@scienbizip.com,eoa-cbd@scienbizip.com,eoa-procc@scienbizippc.com
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 145688

Oct 15, 2020 04:38:06 AM

Dear PAIR Customer:

SBPJ/ScienBiziP, P.C.
550 South Hope Street
Suite 2825
Los Angeles, CA 90071
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 145688 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	N570	10/15/2020	US82724
	N570	10/15/2020	US82724

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM

PART B – FEE(S) TRANSMITTAL

Complete and send this form, together with the applicable fee(s), by mail or fax, or via EFS-Web.

By mail, send to: Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

By fax, send to: (571) 273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

145688 7590 07/17/2020
ScienBiziP, P.C.
550 S. Hope Street, Suite 2825
Los Angeles, CA 90071

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being transmitted to the USPTO via EFS-Web or by facsimile to (571) 273-2885, on the date below.

(Typed or printed name)
(Signature)
(Date)

APPLICATION NO	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO	CONFIRMATION NO
16/597325	10/09/2019	ATSUSHI ISHII	US82724	6587

TITLE OF INVENTION:

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	Undiscounted	1000			1000	10/17/2020

EXAMINER	ART UNIT	CLASS-SUBCLASS

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363)

☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.

☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-09 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list

(1) The names of up to 3 registered patent attorneys or agents OR, alternatively,

(2) The name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

1. ScienBiziP, P.C.
2.
3.

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document must have been previously recorded, or filed for recordation, as set forth in 37 CFR 3.11 and 37 CFR 3.81(a). Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE	(B) RESIDENCE: (CITY and STATE or COUNTRY)
SHARP KABUSHIKI KAISHA	Sakai City, Osaka, JAPAN
FG Innovation Company Limited	Tuen Mun, HONG KONG

Please check the appropriate assignee category or categories (will not be printed on the patent): ☐ Individual ☑ Corporation or other private group entity ☐ Government

4a. Fees Submitted: ☑ Issue Fee ☐ Publication Fee (if required) ☐ Advance Order - # of Copies _____

4b. Method of Payment (*Please first reapply any previously paid fee shown above*):

☐ Electronic Payment via EFS-Web ☐ Enclosed check ☐ Non-electronic payment by credit card (Attach form PTO-2038)

☑ The Director is hereby authorized to charge the required fee(s), any deficiency, or credit any overpayment to Deposit Account No. 602615

5. Change of Entity Status (from status indicated above)

☐ Applicant certifying micro entity status. See 37 CFR 1.29. NOTE: Absent a valid Certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.

☐ Applicant asserting small entity status. See 37 CFR 1.27. NOTE: If the application was previously under micro entity status, checking this box will be taken as a notification of loss of entitlement to micro entity status.

☐ Applicant changing to regular undiscounted fee status. NOTE: Checking this box will be taken as a notification of loss of entitlement to small or micro entity status, as applicable.

NOTE: This form must be signed in accordance with 37 CFR 1.31 and 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Authorized Signature /Alvin Koan/ Date 10/16/2020

Typed or printed name Alvin Koan Registration No. 68468

OMB Clearance and PRA Burden Statement for PTOL-85 Part B

The Paperwork Reduction Act (PRA) of 1995 requires Federal agencies to obtain Office of Management and Budget approval before requesting most types of information from the public. When OMB approves an agency request to collect information from the public, OMB (i) provides a valid OMB Control Number and expiration date for the agency to display on the instrument that will be used to collect the information and (ii) requires the agency to inform the public about the OMB Control Number's legal significance in accordance with 5 CFR 1320.5(b).

The information collected by PTOL-85 Part B is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450. Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Electronic Patent Application Fee Transmittal

Application Number:	16597325
Filing Date:	09-Oct-2019
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Filer:	Alvin Sean Koan
Attorney Docket Number:	US82724

Filed as Large Entity

Filing Fees for Utility under 35 USC 111(a)

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
UTILITY APPL ISSUE FEE	1501	1	1000	1000

Description	Fee Code	Quantity	Amount	Sub-Total in USD($)
Extension-of-Time:				
Miscellaneous:				
			Total in USD ($)	**1000**

Electronic Acknowledgement Receipt

EFS ID:	40871874
Application Number:	16597325
International Application Number:	
Confirmation Number:	6587
Title of Invention:	ACCESS NODE, A METHOD FOR AN ACCESS NODE, A WIRELESS TERMINAL AND A METHOD FOR A WIRELESS TERMINAL
First Named Inventor/Applicant Name:	Atsushi ISHII
Customer Number:	145688
Filer:	Alvin Sean Koan
Filer Authorized By:	
Attorney Docket Number:	US82724
Receipt Date:	16-OCT-2020
Filing Date:	09-OCT-2019
Time Stamp:	20:26:06
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	DA
Payment was successfully received in RAM	$1000
RAM confirmation Number	E20200FK26495165
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Issue Fee Payment (PTO-85B)	US8272420201016FIF.pdf	331436 3be3a22d1de0dd2b4172065e2d9f3a07d86e2518	no	2
Warnings:					
Information:					
2	Fee Worksheet (SB06)	fee-info.pdf	30251 4fe6ad52f6aae8123ee8bddf89fda4749fefb484	no	2
Warnings:					
Information:					
		Total Files Size (in bytes):	361687		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Sheet 1 of 2

INFORMATION DISCLOSURE CITATION

(Use several sheets if necessary)

ATTY. DOCKET NO.	APPLICATION NO.
161083_1US_1035-1394	To be assigned
INVENTOR(S)	
ISHII	
FILING DATE	**ART UNIT**
October 9, 2019	To Be Assigned

U.S. PATENT DOCUMENTS

*EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUBCLASS	FILING DATE IF APPROPRIATE
		2018/0110036	4-2018	Tabet			
		8,837,404	9-2014	Cha			
		8,379,567	2-2013	Cho			
		2018/0132165	5-208	Takahashi			
		2009/0221293	9-2009	Petrovic			
		2015/0223148	8-2015	Shi			
		2016/0234759	8-0216	Kubota			
		2016/0150506	5/2016	Tabet			
		2016/0143017	5/2016	Yang			
		2015/0334766	11-2015	Lee			
		2010/0227611	9-2010	Schmidt			
Change(s) applied to document, /B.P./ 5/11/2020		2015/0223148	8-2015	~~Qualcomm Incorporated~~ Shi et al.			
		2016/0150506	5-2016	~~Apple Inc.~~ Tabet et al.			
		2009/0262693	10-2009	Wang et al.			
		8,538,444	9-2013	Lee et al.			
		2018/0035468	2-2018	Ishii			

FOREIGN PATENT DOCUMENTS

		DOCUMENT	DATE	COUNTRY	CLASS	SUBCLASS	TRANSLATION YES	TRANSLATION NO
		WO 2015/143244 A1	9-2015	WIPO/PCT				
		WO 2008/044664 A1	4-2008	PCT				
		2 816 741 A2	12-2014	EP				

OTHER DOCUMENTS (including Author, Title, Date, Pertinent pages, etc.)

		Notice of Allowance mailed April 19, 2019 in U.S. Patent Application 15/658,980
		Allowed Claims from U.S. Patent Application 15/658,980
		International Preliminary Report on Patentability mailed January 29, 2019 in PCT Application No. PCT/US17/43587
		International Search Report and Written Opinion mailed October 6, 2017 in PCT Application No. PCT/US17/43587
		R2-163853, 3GPP TSG-RAN WG2 Meeting #94, ETRI, "System information handling in NR", Nanjing, China, 23rd – 27th May 2016
		R2-163743, 3GPP TSG-RAN WG2 Meeting #94, ZTE, "Consideration on the System Information in NR", Nanjing, P.R. China, 23th – 27th May 2016
		R2-163586, 3GPP TSG-RAN WG2 Meeting #94, Intel Corporation, "System information for standalone NR deployment", Nanjing, China, 23 - 27 May 2016
		R2-163470, 3GPP TSG RAN WG2 Meeting #94, CATT, "System information in NR", Nanjing, China, May 23rd – 27th, 2016
		R2-163371, 3GPP TSG-RAN WG2 Meeting #94, Samsung, "System Information Signalling Design in NR", Nanjing, China, 23-27 May 2016
		R2-164127, 3GPP TSG-RAN2 Meeting #94, Huawei, HiSilicon, "System information design", Nanjing, China, 23 - 27 May, 2016
		R2-164122, 3GPP TSG-RAN WG2 Meeting #94, Qualcomm Incorporated, Convida Wireless, "NR System Information Provisioning", Nanjing, China 23rd – 27th May 2016

*Examiner		Date Considered	

Examiner: Initial if reference considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

)

ALL REFERENCES CONSIDERED EXCEPT WHERE LINED THROUGH. /D.H/

2954744

UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	ISSUE DATE	PATENT NO.	ATTORNEY DOCKET NO.	CONFIRMATION NO.
16/597,325	11/17/2020	10841958	US82724	6587

145688 7590 10/28/2020

SBPJ/ScienBiziP, P.C.
550 South Hope Street
Suite 2825
Los Angeles, CA 90071

ISSUE NOTIFICATION

The projected patent number and issue date are specified above.

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b)
(application filed on or after May 29, 2000)

The Patent Term Adjustment is 0 day(s). Any patent to issue from the above-identified application will include an indication of the adjustment on the front page.

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (http://pair.uspto.gov).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Application Assistance Unit (AAU) of the Office of Data Management (ODM) at (571)-272-4200.

APPLICANT(s) (Please see PAIR WEB site http://pair.uspto.gov for additional applicants):

SHARP KABUSHIKI KAISHA, Sakai City, JAPAN;
Atsushi ISHII, Vancouver, WA;
FG Innovation Company Limited, Hong Kong, HONG KONG;

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The USA offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to encourage and facilitate business investment. To learn more about why the USA is the best country in the world to develop technology, manufacture products, and grow your business, visit SelectUSA.gov.

To: eoa-proce@scienbizip.com,eoa-cbd@scienbizip.com,eoa-procc@scienbizippc.com
From: PAIR_eOfficeAction@uspto.gov
Cc: PAIR_eOfficeAction@uspto.gov
Subject: Private PAIR Correspondence Notification for Customer Number 145688

Oct 29, 2020 04:06:39 AM

Dear PAIR Customer:

SBPJ/ScienBiziP, P.C.
550 South Hope Street
Suite 2825
Los Angeles, CA 90071
UNITED STATES

The following USPTO patent application(s) associated with your Customer Number, 145688 , have new outgoing correspondence. This correspondence is now available for viewing in Private PAIR.

The official date of notification of the outgoing correspondence will be indicated on the form PTOL-90 accompanying the correspondence.

Disclaimer:
The list of documents shown below is provided as a courtesy and is not part of the official file wrapper. The content of the images shown in PAIR is the official record.

Application	Document	Mailroom Date	Attorney Docket No.
16597325	ISSUE.NTF	10/28/2020	US82724

To view your correspondence online or update your email addresses, please visit us anytime at https://sportal.uspto.gov/secure/myportal/privatepair.

If you have any questions, please email the Electronic Business Center (EBC) at EBC@uspto.gov with 'e-Office Action' on the subject line or call 1-866-217-9197 during the following hours:

Monday - Friday 6:00 a.m. to 12:00 a.m.

Thank you for prompt attention to this notice,

UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION INFORMATION RETRIEVAL SYSTEM