




US 20060092133A1

(19) **United States**(12) **Patent Application Publication****Touma et al.**(10) **Pub. No.: US 2006/0092133 A1**(43) **Pub. Date: May 4, 2006**(54) **3D MOUSE AND GAME CONTROLLER
BASED ON SPHERICAL COORDINATES
SYSTEM AND SYSTEM FOR USE**(75) Inventors: **Pierre Touma**, Austin, TX (US); **Hadi Murr**, Beirut (LB); **Elie Bachaalani**, Beirut (LB); **Imad Maalouf**, Beirut (LB)Correspondence Address:
Bert Vermeulen
c/o Henry Waters and Associates
4740 Table Mesa Drive
Boulder, CO 80305 (US)(73) Assignee: **Pierre A. Touma**(21) Appl. No.: **11/263,710**(22) Filed: **Oct. 31, 2005****Related U.S. Application Data**

(60) Provisional application No. 60/624,335, filed on Nov. 2, 2004.

Publication Classification(51) **Int. Cl.**
G09G 5/08 (2006.01)(52) **U.S. Cl.** **345/158**(57) **ABSTRACT**

A computer input device constructed from at least one tilt accelerometer and at least one linear input element is disclosed. This input device can be used in a computer system to specify a position on a display using radial coordinates, cylindrical coordinates, or spherical coordinates.

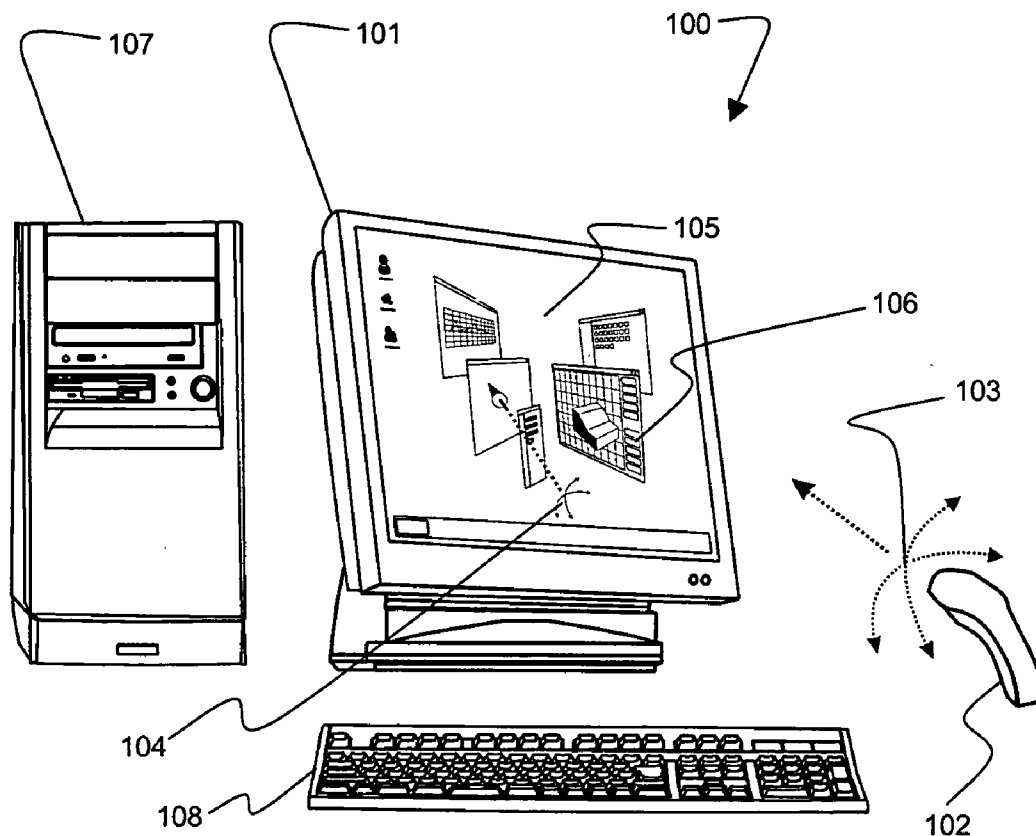

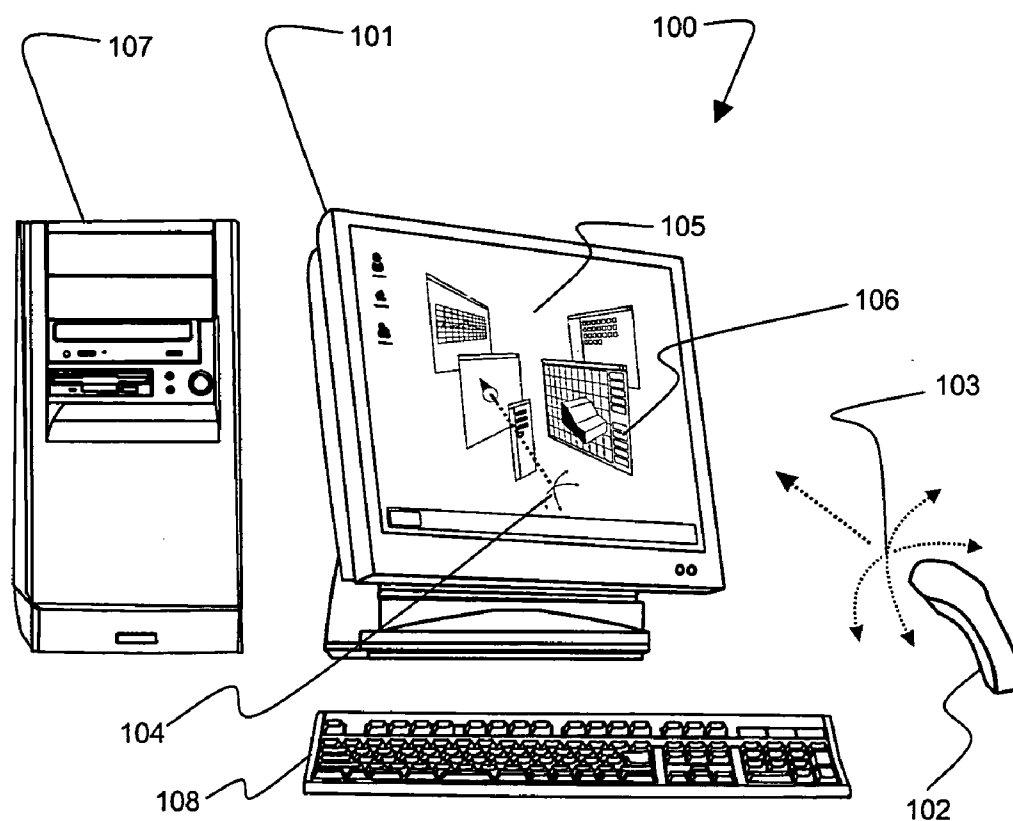


Fig. 1

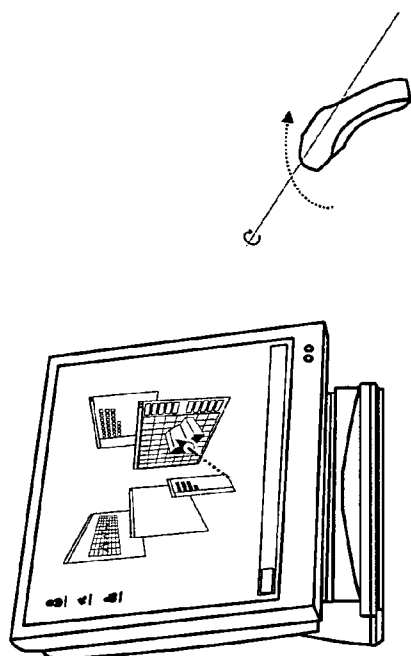


Fig. 2b

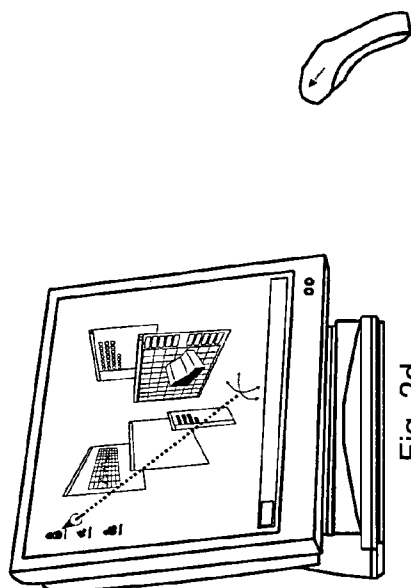


Fig. 2d

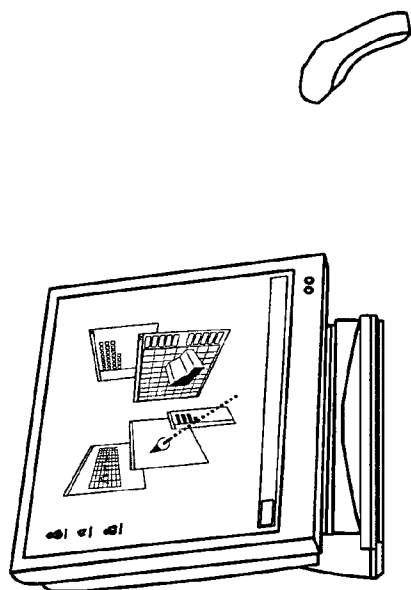


Fig. 2a

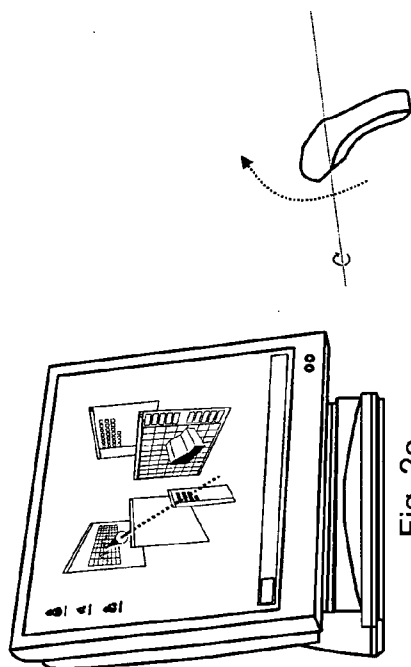


Fig. 2c

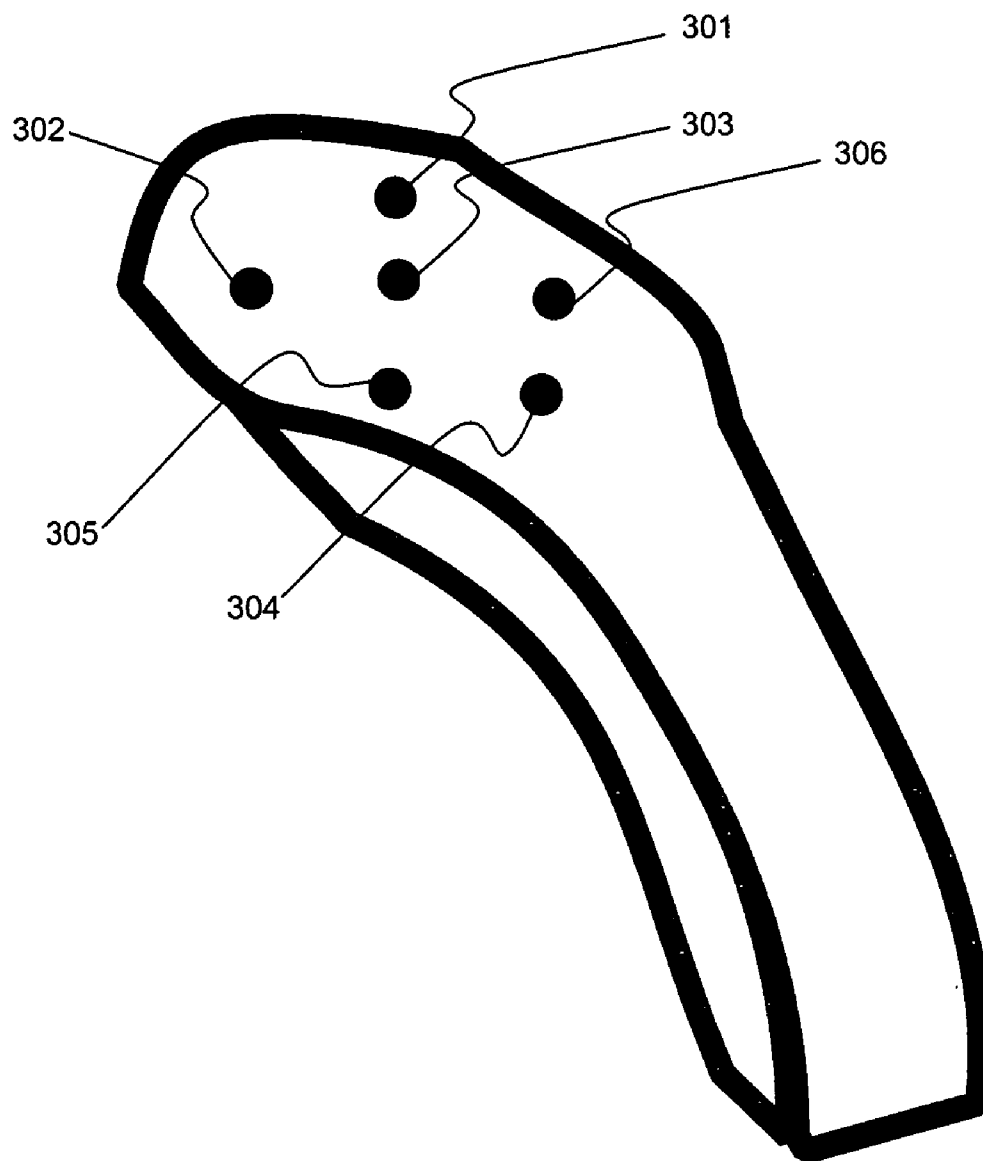


Fig. 3

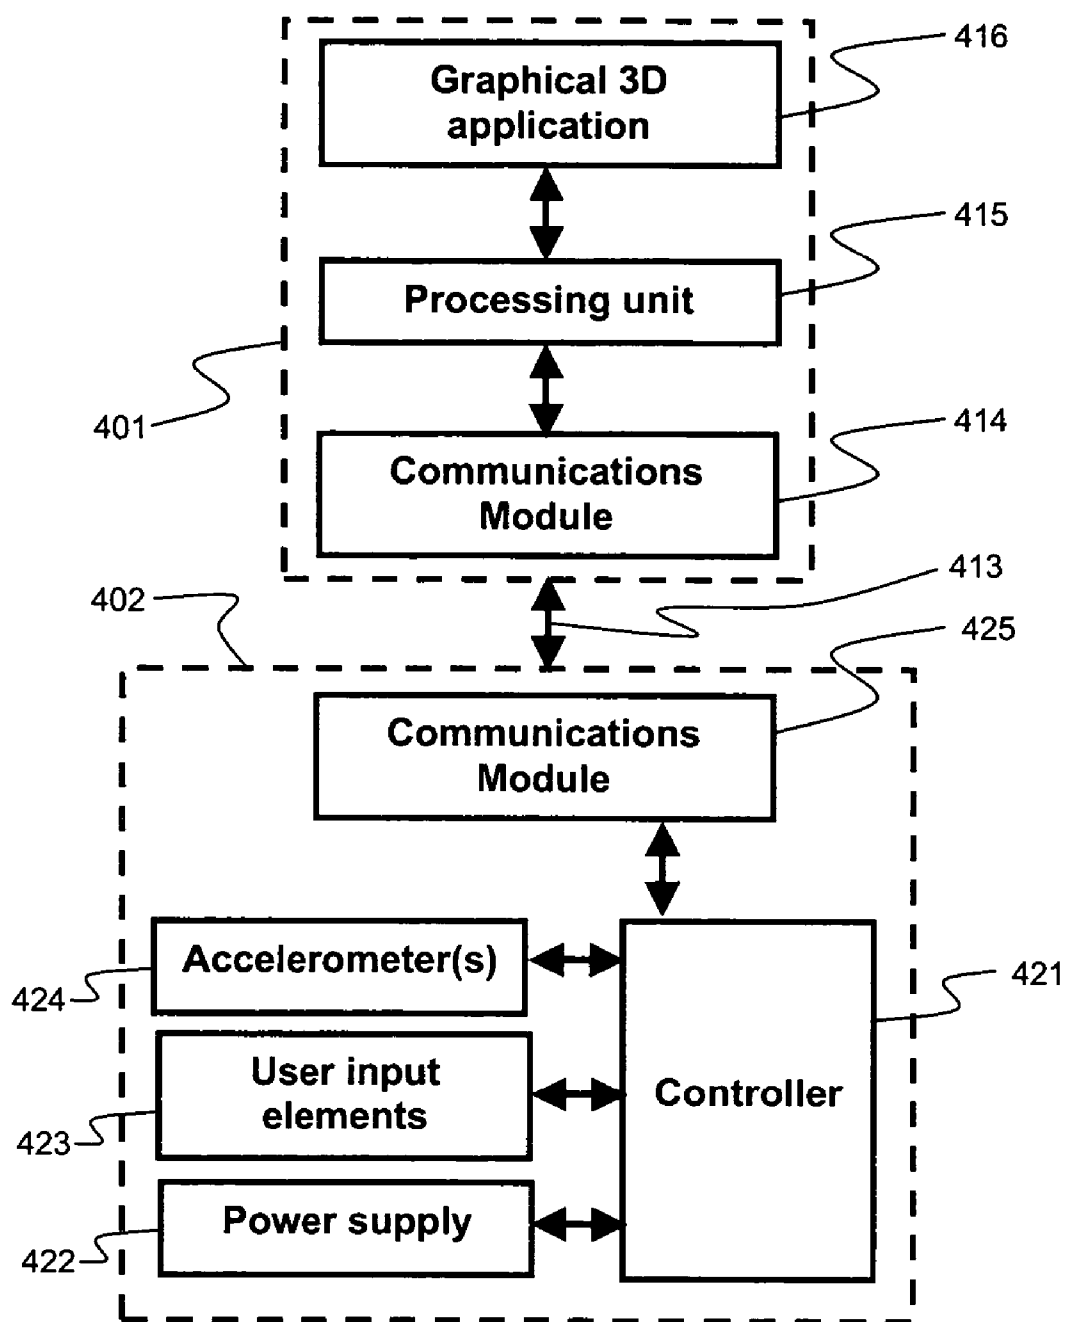


Fig. 4

3D MOUSE AND GAME CONTROLLER BASED ON SPHERICAL COORDINATES SYSTEM AND SYSTEM FOR USE

[0001] This application claims priority based on U.S. Provisional Patent Application Ser. No. 60/624,335 entitled "3D Mouse/Pointer Based on Spherical Coordinates System and System for Use," filed 2 Nov. 2004.

FIELD OF INVENTION

[0002] The present invention relates to the field of computer peripherals and controllers. One embodiment of the present invention relates to the control of 3D video games characters, home entertainment systems or more industrial applications such as robotics and the control of UAVs (unmanned aerial vehicles) and UGVs (unmanned ground vehicles). Specifically, one embodiment of the present invention relates to a method and apparatus for moving and controlling a cursor, object, character or mechanical system in a virtual or physical 3D environment. One embodiment of the present invention uses inertial sensing technology and an approach based on a mathematical representation of the 3D space with spherical coordinates, instead of the Cartesian representation mostly used in 3D applications.

BACKGROUND OF THE INVENTION

[0003] The tremendous computing power available at low cost in the early 21st century has made possible many computer applications that previously were unattainable because of the computational resources required. A prime example is three-dimensional modeling. To compute large three-dimensional models and to manipulate them in real-time requires large computational power, unless the models are very primitive. Today many applications, ranging from computer games with very high levels of realism to modeling of sub-surface geological formations are possible on even relatively mainstream computer systems.

[0004] A related trend is the merging of technologies such as televisions, home theatre, computers and game stations to produce PC Entertainment Centers. This trend is complemented by the drive towards 3D games and game environments. One challenge, however, is to make full use of the three dimensional environments by giving the users attractive tools to manipulate objects or characters of these three dimensional environments.

[0005] In the two-dimensional computing world, the mouse has become a ubiquitous feature for allowing a user to move a cursor around in the two-dimensional space. Moving the cursor with the mouse can be used to find and select particular objects. There is a need to be able to move a cursor to objects located in three-dimensional space as well as the need to move objects or characters in a 3D environment. This is much more challenging than moving a mouse across a tabletop as is the customary means for moving a cursor using a three-dimensional mouse.

[0006] In the prior art there are several known methods for moving a cursor in three-dimensional space. These include moving a receiver with respect to a field established by external beacons or emitters/receivers, with respect to acoustic, magnetic or optical signals that may be detected by the receiver. Problems with such approaches include the need for using external devices.

[0007] Other prior art solutions rely on gyroscopes to detect the movement of a 3D mouse, allowing the device to move a cursor in a 2D plan on the monitor. However, these solutions lack the 3D capability that is needed when dealing with 3D environments.

[0008] From the foregoing it is apparent that there is a hitherto unmet need for a 3D pointing/controlling device that is self-contained, lightweight, and which uses low-cost components. The need is also apparent for a controlling device that could be used to remotely control mechanical systems such as Unmanned Air Vehicles (UAVs), UGVs Unmanned Ground Vehicles (UGVs), Unmanned Water Vehicles (UWVs) and other robotics systems, in a natural and efficient manner that is different from the method still followed today as represented by the control unit of model airplanes and the likes. One embodiment of the present invention can be used to address needs such as these.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] In the accompanying drawings:

[0010] **FIG. 1** shows a 3D input device used in a 3D computer system;

[0011] **FIG. 2** shows the detailed movement of the device and the related control of a vectorial cursor;

[0012] **FIG. 3** shows one embodiment of the 3D Mouse/Controller with the knobs and buttons used for interaction with a 3D environment; and

[0013] **FIG. 4** shows a block diagram of the 3D Mouse/Controller system and the way it interacts with a 3D application on the computer monitor, through interrelated modules performing the different functions of: Movement Sensing, Sensing data interpretation and conversion to digital data, Wireless Communication of the data to an interface, Graphical rendering of the data in a 3D application.

DESCRIPTION OF THE EMBODIMENTS

[0014] This invention is described in one embodiment in the following description with reference to the Figures, in which like numbers represent the same or similar elements or process steps. While this invention is described in terms of the best mode for achieving this invention's objectives in a particular application, it will be appreciated by those skilled in the art that variations may be accomplished in view of these teachings without deviating from the spirit or scope of the present invention.

[0015] For example, the present invention may be implemented using any combination of computer programming software, firmware, or hardware. As a preparatory step to practicing the invention or constructing an apparatus according to the invention, the computer programming code (whether software or firmware) according to the invention will typically be embedded in one or more machine readable storage devices such as micro-controllers, Flash memories, semiconductor memories such as ROMs, PROMs, etc., thereby making an article of manufacture in accordance with the invention.

[0016] The article of manufacture containing the computer programming code is used by either executing the code directly from the storage device, or by transmitting the code according to the present invention with appropriate standard

computer hardware to execute the code contained therein. An apparatus for practicing the invention could be one or more devices having network access to computer program(s) coded in accordance with the invention.

[0017] One embodiment of the present technological innovation relates to pointing (I/O) devices used to position or manipulate a vectorial object. Vectorial objects can be vectorial cursors, graphical symbols, or any pictorial representation of physical or virtual object or character having one or multiple dimensions that has both a linear component (such as magnitude [or size], or position in a Cartesian space) and an angular component (such as orientation). In particular one embodiment of the present invention relates to handheld devices that can be used to position or manipulate a vectorial object such as a vectorial cursor or 3D objects/Characters in three-dimensional space. A vectorial cursor in 3D is the analog of a cursor in 2D. It is shaped like an arrow giving the user spatial feedback of the direction and position of the cursor. Depending on the application, the length of the arrow could be variable or fixed, whereby the arrow would be either extending from a spherical coordinates point of reference, or virtually moving in the 3D space. Thus, provided is an inertial sensor-based application related to a 3D Mouse that can act as a spatial pointer and can reach objects and icons in three dimensional environments and manipulate said objects, icons or characters. Such three dimensional environments could be generated by 3D graphical rendering or 3D GUIs with 2D monitors, volumetric monitors or stereoscopic and holographic monitors.

[0018] Such an embodiment of the present invention is based on inertial technology and methods that determine the position of a cursor in a 3D environment. This is achieved by mapping the movement of an operator's hand in space onto a polar coordinates frame of reference, thus optimizing the number of inertial sensors needed and reducing manufacturing cost. In such an embodiment, the application of the technology uses a single accelerometer in a form factor allowing it to be used as a desktop mouse or free-standing remote controller or game controller. In addition to its role as a mouse for the interaction with 3D environments and 3D GUIs, the device/technology has the capability—in one embodiment—to act as a universal remote controller with both 2D and 3D interfaces of entertainment/media centers.

[0019] In another embodiment the same approach could be used with a glove-like application allowing the user to interact with both 2D and 3D environments by limited movements of the hand and/or fingers. In a further embodiment, it could also act as an advanced game controller for 3D games and could be coupled with haptic feedback. Furthermore, the method/technology could be applied in combination with portable game consoles (Gameboy, PSP . . .) allowing players to interact with mobile 3D games through movements of the console itself, in combination with triggers. This application is also useful with handheld computers and portable phones, allowing navigation through 2D or 3D interface menus by moving the device itself instead of using a stylus or the operators fingers.

[0020] Another embodiment of the technology would be as an add-on to game-specific sports hardware for a new generation of sports games (Baseball bat, Golf drive, Tennis racket, Skateboard, Skis, Luge . . .) and body movement games. In yet another embodiment, the technology could be applied for the control of UAVs and other remote controlled aircrafts and/or their embedded systems such as cameras/other detection equipment. The same embodiment is applicable to the control of model toys (aircraft, cars, boats . . .). A person familiar with the art would also find that the technology has also applications in the field of medicine, engineering and sciences. It could be a virtual scalpel, a controller for a robotic arm, or a pointer for the manipulation of 3D molecules among other applications. . .

[0021] The present invention can provide a natural and ergonomic way to interact with 3D environments and to control systems in 3D space. This can be done by means of a 3-dimensional computer pointing and input device (3D Mouse/Controller) that uses a polar (spherical) coordinates approach implemented through the use of inertial technology (accelerometer), to reach a point in 3D space and to control graphical symbols and animated characters in 3D environments.

[0022] The present invention can be implemented using a 3D Pointer concept. The three-dimensional pointer is achieved by using a spherical coordinate system. Its structure permits the user to access any point in his virtual environment by properly changing the device's directions and by increasing or decreasing the pointer length. The tilt angles, Pitch and Roll, captured from the accelerometer are used respectively as Alpha and Beta angles of the spherical coordinate system as illustrated in the equations below. While directions are captured from the hand movement by measuring the projection of the static gravity on the tilted accelerometer, the pointer length which is the physical analog of the radius R is simulated by using a trigger pair on the device. The user can change its pointer in order to reach the desired three-dimensional point by pressing the increase and decrease triggers. An alternative is to use a time varying pointer length. As a result the instantaneous position of the pointer in the inertial frame can be expressed as a function of the time-varying radius and spherical angles.

$$X=R(t).\text{Cos}(\alpha).\text{Sin}(\beta)$$

$$Y=R(t).\text{Sin}(\alpha).\text{Sin}(\beta)$$

$$Z=R(t).\text{Cos}(\beta)$$

[0023] Like most 3D interfaces it is important to distinguish between the inertial frame and the user frames. The inertial frame is considered as a reference and all objects in the 3D virtual environment are expressed with respect to it. Thus this system is fixed. The x-axis is pointing to any convenient direction, the z-axis is pointing vertically upward and the y-axis is perpendicular to both. The user frame is the mobile system containing the pointer. It is defined by a rotation around the z-axis by ψ and by the rotation around x and y by θ and Ψ . Moreover the distance between those frames defines the offset of the pointer with respect to the

inertial frame. The figure below illustrates those rotations. The matrix linking between those two frames is the product of the following rotation matrix.

$$R = e^{(2 \times) \psi} e^{(\psi \times) \theta} e^{(\psi \times) \phi} = \begin{bmatrix} \cos(\psi) & -\sin(\psi) & 0 \\ \sin(\psi) & \cos(\psi) & 0 \\ 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} \cos(\theta) & 0 & \sin(\theta) \\ 0 & 1 & 0 \\ -\sin(\theta) & 0 & \cos(\theta) \end{bmatrix} \cdot \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(\phi) & -\sin(\phi) \\ 0 & \sin(\phi) & \cos(\phi) \end{bmatrix}$$

[0024] After developing we get:

$$R_{1B} = \begin{bmatrix} \cos(\psi) \cdot \cos(\theta) & \cos(\psi) \cdot \sin(\theta) \cdot \sin(\phi) - \sin(\psi) \cdot \cos(\phi) & \cos(\psi) \cdot \sin(\theta) \cdot \cos(\phi) - \sin(\psi) \cdot \sin(\phi) \\ \sin(\psi) \cdot \cos(\theta) & \sin(\psi) \cdot \sin(\theta) \cdot \sin(\phi) - \cos(\psi) \cdot \cos(\phi) & \sin(\psi) \cdot \sin(\theta) \cdot \cos(\phi) - \cos(\psi) \cdot \sin(\phi) \\ -\sin(\theta) & \cos(\theta) \cdot \sin(\phi) & \cos(\theta) \cdot \cos(\phi) \end{bmatrix}$$

[0025] In one embodiment of the present invention the 3D interface is used to create the virtual reality scene needed to interact with the 3D pointer. This interface is developed in an expandable mode in order to permit any improvement in the future. This interface allows the user to interact with the 3D objects, to change the colors of the ground and the pointer, to change the render mode between wire frame, hidden, and rendered, to change the view angles and the light intensity.

[0026] It is important to mention that the yaw angle can be changed directly from the pointing device in order to make the navigation easier. In order to avoid the use of additional sensing components such as a magnetic sensor or Gyroscope, we have simulated the yaw dimension by a rotation of the field of view. This field of view rotation is a manipulation of the graphical perspective through the interface software, by a pair of control buttons on the device itself.

[0027] In one embodiment of the present invention we are using an inertial sensor to detect tilt accelerations that will then be converted into movement. In this particular embodiment, we are using a MEMS accelerometer developed by Analog Devices, the ADXL202E MEMS accelerometer. Any similar inertial sensor including thermal accelerometers could be used. The ADXL202E is a low-cost, low-power, complete two-axis accelerometer with a digital output, all on a single monolithic IC. The ADXL202E can measure both dynamic acceleration (e.g., vibration) and static acceleration (e.g., gravity). The outputs are analog voltage or digital signals whose duty cycles (ratio of pulse width to period) are proportional to acceleration. A microprocessor counter, without an A/D converter or glue logic, can directly measure the duty cycle outputs. The duty cycle period is adjustable from 0.5 ms to 10 ms via external timing resistor.

[0028] The ADXL202E is a complete, dual-axis acceleration measurement system. For each axis, an output circuit converts the analog signal to a duty cycle modulated (DCM) digital signal that can be decoded with the timer port of the

microprocessor used. The ADXL202E is capable of measuring both positive and negative accelerations to at least ± 2 g. The accelerometer can measure static acceleration forces such as gravity, allowing it to be used as a tilt sensor as used in our application. Acceleration will result in an output square wave whose amplitude is proportional to acceleration. Phase sensitive demodulation techniques are then used to rectify the signal and determine the direction of the acceleration.

[0029] One of the most popular applications of the ADXL202E is tilt measurement. An accelerometer uses the force of gravity as an input vector to determine orientation of an object in space. An accelerometer is most sensitive to tilt when its sensitive axis is perpendicular to the force of gravity, i.e., parallel to the earth's surface. At this orientation its sensitivity to changes in tilt is highest. When the accelerometer is oriented on axis to gravity, i.e., near its +1 g or

-1 g reading, the change in output acceleration per degree of tilt is negligible. When the accelerometer is perpendicular to gravity, its output will change nearly 17.5 mg per degree of tilt, but at 45° degrees it is changing only at 12.2 mg per degree and resolution declines. Due to the fact that it is sensible to the static gravity, it can be used to measure especially Tilt angles (Pitch and Roll) just by measuring the projection of the vector g over each axis of the accelerometer.

[0030] When the accelerometer is oriented so both its X and Y axes are parallel to the earth's surface it can be used as a two axis tilt sensor with a roll and a pitch axis. Once the output signal from the accelerometer has been converted to an acceleration that varies between -1 g and +1 g, the output tilt in degrees is calculated as follows:

$$\text{Pitch} = A \sin\left(\frac{Ax}{1g}\right)$$

$$\text{Roll} = A \sin\left(\frac{Ay}{1g}\right)$$

[0031] In one embodiment of the present invention the 3D Mouse/controller is a hand held device that captures the movement of a hand in free space and controls the movement of a vectorial cursor, object or character in an application on a monitor, or a system in physical space. It uses inertial technology in the form of an accelerometer or any similar technology that measures angular acceleration/displacement with great precision. This technology allows the 3D Mouse/Controller to be self-contained without the need for beacons or emitters/receivers to detect generated signals, as the case would be with acoustic, magnetic or optical approaches.

[0032] Practically, it could be either used as a mouse for 3D GUIs and volumetric monitors, a controller for 3D

games, a pointer for interactive presentations or as a remote controlling device for the upcoming PC Entertainment Centers that would combine a TV with a Computer and a Home Theatre. Its range only depending of that of the wireless technology used. In an alternative embodiment, the 3D Mouse/Controller is a wired device connected electrically to a computing device.

[0033] This control functionality could be extended to controlling more household peripherals such as telecommunications, lighting, irrigation, security system, heating/cooling or even car start-up in the morning. This would be done through a software user interface (Windows, Linux etc . . .) that would appear on a large Plasma (or other) screen. The said screen playing the role of a TV, computer monitor and command and control interface.

[0034] In this respect, the 3D Mouse/Controller could be the future universal remote controller for the next generation of consumer appliances that would be controlled through a central computer (network of computers), instead of each having its own micro-controller and remote controlling device. The complexity of remote controllers would then be in the software interface that would be made more intuitive (and ideally in 3D) than the scroll down menu interface and large number of buttons currently available.

[0035] As the 3D Mouse/Controller also has a spatial capability with the needed degrees of freedom, it is a suitable device for the new generation of 3D monitors (e.g., Stereographic, Holographic and Volumetric). There is a number of companies developing such monitor technologies in the US, Europe and Asia and their feedback is that they still lack a practical/affordable 3D Mouse/Controller that would allow operators to navigate easily in the 3D environment.

[0036] The 3D capability is achieved through a limited amount of hand movements (rotations) that would allow the alignment of a feedback vector (vectorial cursor) with the object to be reached, on the monitor. Practically, the alignment is done by varying the vertical and horizontal angles of the ray, in a polar frame of reference. Once the alignment is achieved, the 3D Mouse allows the extension of the ray whereby it would reach the object, thus enabling it for further manipulation. This approach allows an optimization of needed electronics whereby only one inertial device (accelerometer) is needed for the basic 3D functionality.

[0037] The 3D capability of the device would also enable a new generation of Virtual reality applications (in this case a haptic feedback might be added), Industrial and military simulations, advanced 3D CAD/CAM design, Medicine, Molecular Chemistry, Bio-informatics . . .

[0038] This 3D capability is also an enabling factor for the next generation of game stations and game environments. A game controller enabled by this 3D technology will be able to control characters in a 3D space with very natural movements.

[0039] In one particular embodiment, the technology could be embedded in a portable/mobile game device/system (similar to Gameboy, PSP . . .) adding 3D capability and control through hand movements and allowing the advent of 3D games controlled through movements of the game system itself, thus starting a paradigm shift in portable game systems.

[0040] In another embodiment, the technology could be embedded in game controllers with the shape of sports equipment, (non-extensive list including Golf clubs, Tennis racquets or Baseball bats), thus allowing the creation of even more realistic video games around sports themes.

[0041] Other applications would be a remote controller for hobbyists or for military personnel tele-guiding flying entities such as Unmanned Air Vehicles (UAVs), Unmanned Ground Vehicles (UGVs), or Unmanned Water Vehicles (UWVs).

[0042] From a marketing perspective, the field seems ripe for the technology, especially that it has been designed to be manufactured cost-effectively. One embodiment of the present invention relies on Bluetooth wireless communications and RS 232 connectivity. It is also possible to have wired USB connectivity and Wi-Fi (wireless) communications or any other enabling technology capable of being understood by anyone skilled.

[0043] FIG. 1 shows a 3D computer system at 100. Referring to FIG. 1, a computer is shown at 107, a computer monitor is shown 101, and a computer keyboard is shown at 108. A 3D environment 105 and a set of 3D applications 106 are shown within the monitor 101. A 3D input device or Mouse/Controller 102 interacts with the 3D environment 105 by controlling a vectorial cursor 104. In the example shown here, the vectorial cursor 104 is shaped like an arrow giving the user spatial feedback of the direction and position of the cursor. Depending on the application, the length of the arrow could be extensible or fixed. In the embodiment shown here, the base of the arrow is a fixed origin of a spherical coordinate system and changes in the length of the vectorial cursor 106 are controlled through a linear input element comprising a pair of buttons on the input device 102, allowing a user to reach any point in the space depicted on the monitor 101. In an alternate embodiment, the location of the base of the arrow can be controlled through the input device allowing the entire arrow, or vectorial cursor 104 to move virtually in the 3D space, with the length of the arrow being either fixed or responsive to user input through the 3D input device. A linear input element used in such an input device 102 can be any single or multiple user-responsive components understood by anyone skilled in the art. Examples of linear input elements include a pair of push buttons, a slide switch, a touch pad, and a scroll wheel.

[0044] It should be noted that a computer system could be any system that includes an information-processing unit. Examples of computer systems include, but are not limited to personal digital assistants (PDAs), personal computers, mini-computers, mainframe computers, electronic games, and microprocessor-based systems used to control personal, industrial or medical vehicles and appliances.

[0045] The movement and control functions of the 3D Mouse/Controller 102 are shown as phantom lines at 103. The curved lines and arrows at 103 represent possible movements of the device held by the user. An upward or downward tilt (pitch) of the device would move the vectorial cursor 104 in a similar fashion on the screen, while a lateral tilt (roll) in a left-right manner would move the vectorial cursor 104 on the screen to the left or right. The magnitude of the vectorial cursor 104 is controlled using a pair of control triggers on the device. The combination of pitch, roll, and vector magnitude allow the user to reach any point

in 3D space using spherical coordinates with a minimal amount of physical movement.

[0046] In one embodiment illustrated in **FIG. 1**, the 3D Mouse/Controller **102** is pointing at 3D applications **106** in 3D graphical user interface (GUI) **105** that are displayed on a monitor **101**. In another embodiment, the 3D Mouse/Controller **102** could control one or more 3D graphical objects in a 3D games environment in the same manner. A graphical object can be a video game character or any other graphical symbol in a 3D environment. In that case, the physical embodiment of the controlling device **102** could look like a game controller and the 3D character would be substituted for the vectorial cursor **103**. The vector magnitude derived from a linear input element in the Mouse/Controller **102** can be used to control the size or orientation of the graphical object.

[0047] In another embodiment, the Mouse/Controller **102** is a 2D input device working in radial coordinates. In this case, only one tilt angle and a minimum of one linear input are measured in the input device **102** to provide a 2D navigational device operating in radial coordinates. In yet another embodiment, the Mouse/Controller **102** is an input device with two linear input elements capable of changing a vector magnitude in perpendicular axes. These two perpendicular axis in conjunction with one tilt axis can generate a position in 3D space using cylindrical coordinates.

[0048] **FIGS. 2a, 2b, 2c, and 2d** show the detailed movement of the 3D Mouse/Controller **102** and the related control of the vectorial cursor **104**. **FIG. 2a** shows the initial state of the device **102** and vectorial cursor **104** pointing on one application **106**. **FIG. 2b** shows a right rolling tilt of the device **102** that causes the vectorial cursor **104** to move right and point to another application **106** to the right of the initial one in **FIG. 2a**. **FIG. 2c** shows an upward tilt of the device **102** that causes the vectorial cursor **104** to move up and point to another application **106** above of the initial one in **FIG. 2b**. **FIG. 2d** shows the extension function through a button on the device **102** that causes the vectorial cursor **104** to move further inside the 3D GUI **105** and point to an icon on the desktop **106** above of the application one in **FIG. 2c**.

[0049] **FIGS. 2a, 2b, 2c** are the actual rendering of the device movements and vectorial cursor control as described in **FIG. 1**. Namely, an up-down tilt of the device will move the cursor in an upward or downward manner. Similarly, a left-right tilt of the device would move the vectorial cursor to the left or the right. Finally, the vectorial cursor would move forward or backward through the depression of a pair of triggers on the device itself that controls its spatial extension and retraction.

[0050] **FIG. 3** shows one physical embodiment of the 3D Mouse/Controller with the knobs and buttons used for interaction with a 3D environment. One pair of buttons **301/302** is the equivalent of the left and right clicks of a regular mouse. They activate similar functions. A second pair of buttons (triggers) **303/304** enables the extension and retraction of the vectorial cursor to reach different parts of a 3D environment, by increasing the module of the vectorial cursor. The vectorial cursor being the physical analog of a spherical vector, the buttons actually increase/decrease the module of the vector which is rendered on the screen by a movement of the vectorial cursor forward or backward.

[0051] A third pair of buttons **305/306** allows the user to change the field of view or "perspective" of a 3D scene, in

order to simulate the Yaw dimension. This is done by graphically changing the field of view through a graphical transformation in the interface software. The action is controlled by another pair of triggers on the device.

[0052] **FIG. 4** shows a block diagram of one embodiment of the 3D Mouse/Controller system. The system comprises an input device (which can also be a hand-held pointing device or a 3D Mouse/Controller) **402** and a display control unit module **401**. The input device includes an inertial sensor (accelerometer) **424** operable to detect an acceleration as the user tilts the pointing device in at least one direction; a power supply **422** (which can be a battery, AC power supply, solar cell or any other source of electrical power understood by anyone skilled in the art), a selection unit **423** that comprises a set of user input elements and circuitry to collect the elements activity and allow the user to:

[0053] select a command identifier on the display the same way a user would do with the right and left click buttons of a 2D mouse;

[0054] control the vectorial cursor location through a pair of triggers that extends the magnitude of the spherical radius R which is the mathematical representation of the vectorial cursor; and

[0055] control the field of view of a 3D application.

[0056] In one embodiment, the hand-held pointing device **402** also includes a controller **421** based around a micro-controller and digital signal processor, a field programmable gate array, programmable logic devices, and other related control circuitry well understood by anyone skilled in the art. The controller **421** is connected to the accelerometer **424**, the selection unit **423** and the power supply **422**. The controller **421** is programmed to receive accelerometer data and to compute tilt angles based on the accelerometer data. The controller **421** is also programmed to receive trigger signals from the selection unit and to compute a vector magnitude and field of view translation in response to the trigger signals. The circuit also manages the battery or other power source **422** and optimizes power consumption for the system. In one embodiment, the hand held pointing device further includes a communications module **425** that converts computed data into communication protocols to be dispatched to a host computer via a wireless (or wired) connection **413**;

[0057] Further referring to **FIG. 4**, the display unit control module **401** in one embodiment of the present invention includes a communications module **414** to receive the orientation data and user selection activity data transmitted from the handheld pointing device; and a processing unit **415** comprising a microprocessor, a digital signal processor, memory modules and a driver that interprets communicated data to be viewed by a software interface (graphical 3D application) **416**; wherein the software interface gives a graphical rendering of dispatched and interpreted data.

[0058] Thus, a method and apparatus for interacting with virtual and physical 3D environment by means of a novel 3D Mouse/Controller is disclosed. These specific arrangements and methods described herein are merely illustrative of the principals of the present invention. Numerous modifications in form and detail may be made by those of ordinary skill in the art without departing from the scope of the present invention. Although this invention has been shown in rela-

tion to a particular embodiment, it should not be considered so limited. Rather, the present invention is limited only by the scope of the appended claims.

What is claimed is:

1. A tilt and vector magnitude input device for use in a computer system, the input device comprising:

an accelerometer responsive to tilt of the input device;

a linear input element capable of changing vector magnitude in response to user input;

an electronic circuit connected to said accelerometer and said linear input element wherein said electronic circuit computes tilt data in response to signals from said accelerometer and vector magnitude data in response to signals from said linear input element; and

a communications system connected to said electronic circuit capable of transmitting said tilt data and said vector magnitude data to a computer.

2. The device of claim 1 wherein said electronic circuit comprises a microprocessor.

3. The device of claim 2 wherein said accelerometer is responsive to tilt about more than one axis.

4. The device of claim 3 wherein said accelerometer is constructed from more than one tilt sensor.

5. The device of claim 3 wherein said accelerometer is constructed from one tilt sensor.

6. The device of claim 3 wherein said communication system is capable of transmitting data over a wireless interface.

7. The device of claim 3 wherein the accelerometer data is digital accelerometer data and the electronic circuit is programmed to compute tilt as a function of a deviation from gravitational acceleration.

8. A system for manipulating a vectorial object in a three dimensional environment on a computer display, the system comprising:

a hand-held device comprising:

an accelerometer responsive to tilt of said hand-held device;

a linear input element capable of changing a vector magnitude in response to user input;

an electronic circuit connected to said accelerometer and said linear input element wherein said electronic circuit computes tilt data in response to signals from said accelerometer and vector magnitude data in response to signals from linear input element; and

a communications system connected to said electronic circuit which transmits said tilt data and said vector magnitude data; and

a computer comprising:

a communications system capable of receiving said tilt data and said vector magnitude data;

code capable of converting said tilt data and said vector magnitude data to said vectorial object on said computer display.

9. The system of claim 8 wherein said electronic circuit comprises a microprocessor.

10. The system of claim 9 wherein said accelerometer is responsive to tilt about more than one axis.

11. The system of claim 10 wherein said accelerometer is constructed from more than one tilt sensor.

12. The system of claim 10 wherein said accelerometer is constructed from one tilt sensor.

13. The system of claim 10 wherein said communication system is capable of transmitting data over a wireless interface.

14. The system of claim 10 wherein the accelerometer data is digital accelerometer data and the electronic circuit is programmed to compute tilt as a function of a deviation from gravitational acceleration.

15. A method for presenting user manipulation of a hand held device onto a simulated three dimensional computer display, the method comprising the steps of:

generating tilt data in response to the tilt of an element of said hand-held device;

generating linear input data in response to user interaction with an element of said hand-held device;

transmitting said tilt and linear input data to the computer display; and

modifying the visual presentation of a vectorial object on the computer display in response to said tilt data and said linear input data.

16. The method of claim 15 wherein:

generating tilt data further comprises digitized data;

generating tilt data further comprises using a microprocessor;

generating linear input data further comprises digitized data; and

generating linear input data further comprises using a microprocessor.

17. The method of claim 16 wherein generating tilt data further comprises generating tilt data about more than one axis.

18. The method of claim 17 wherein generating tilt data further comprises generating digital accelerometer data responsive to a deviation from gravitational acceleration.

19. A method for controlling and manipulating elements of a three-dimensional environment, the method comprising the steps of:

measuring tilt about two independent axes in a hand-held device;

collecting linear input data with said hand-held device;

converting said tilt about two independent axes and said linear input data to a position in three-dimensional space specified by spherical coordinates; and

presenting said three dimensional position on a display.

20. The method of claim 19 wherein:

measuring further comprises digitized data;

converting further comprises digital data;

converting further comprises using a microprocessor; and

measuring further comprises measuring a deviation from gravitational acceleration.

* * * * *