

中华人民共和国国家知识产权局
STATE INTELLECTUAL PROPERTY OFFICE
OF THE PEOPLE'S REPUBLIC OF CHINA

PCT/CN2010/073463



证 明

CERTIFICATE

本证明之附件是向中国专利局作为受理局提交的下列国际申请文件副本
THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY OF THE BELOW
IDENTIFIED INTERNATIONAL APPLICATION THAT WAS FILED WITH THE
CHINESE PATENT OFFICE AS RECEIVING OFFICE

国际申请号: PCT/CN2010/073411


INTERNATIONAL APPLICATION NUMBER

国际申请日: 2010年01月06日

INTERNATIONAL FILING DATE

发明名称: APPARATUS AND METHOD FOR SELECTION OF BEAM

TITLE OF INVENTION GROUPS AND SUBSET OF BEAMS IN A COMMUNICATION
SYSTEM

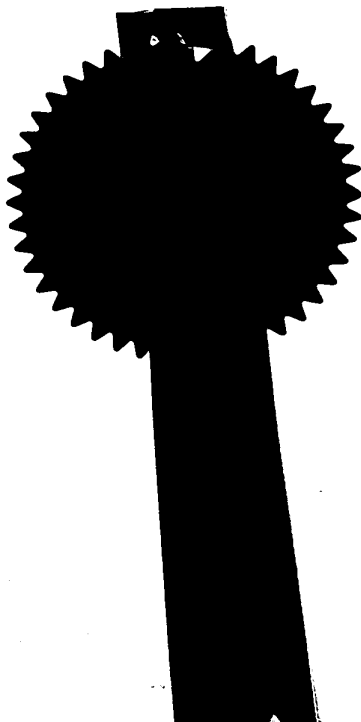

中华人民共和国国家知识产权局局长

COMMISSIONER OF THE STATE INTELLECTUAL PROPERTY

OFFICE OF THE PEOPLE'S REPUBLIC OF CHINA

田力普

2010年9月6日



PCT REQUEST

Print Out (Original in Electronic Form)

0	For receiving Office use only	
0-1	International Application No.	PCT/CN 2010/ 0 7 3 4 1 1
0-2	International Filing Date	0 1. JUN. 2010 (0 1. 06. 2010)
0-3	Name of receiving Office and "PCT International Application"	RO/CN 中华人民共和国国家知识产权局 PCT International Application
0-4	Form PCT/RO/101 PCT Request	
0-4-1	Prepared Using	PCT-SAFE Version 3.51.044.220 MT/FOP 20100101/0.20.5.18
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	State Intellectual Property Office of the People's Republic of China (RO/CN)
0-7	Applicant's or agent's file reference	EIE100124PCT
I	Title of Invention	APPARATUS AND METHOD FOR SELECTION OF BEAM GROUPS AND SUBSET OF BEAMS IN A COMMUNICATION SYSTEM
II	Applicant	
II-1	This person is	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	NOKIA CORPORATION
II-5	Address	Keilalahdentie 4, 02150 Espoo Finland
II-6	State of nationality	FI
II-7	State of residence	FI
III-1	Applicant and/or inventor	
III-1-1	This person is	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	KOIVISTO, Tommi
III-1-5	Address	Amiraalin puistotie 10 B 46, 02320 Espoo Finland
III-1-6	State of nationality	FI
III-1-7	State of residence	FI



PCT REQUEST

Print Out (Original in Electronic Form)

III-2	Applicant and/or inventor	
III-2-1	This person is	applicant and inventor
III-2-2	Applicant for	US only
III-2-4	Name (LAST, First)	ROMAN, Timo
III-2-5	Address	Lansanportti 1 C13, 02630 Espoo Finland
III-2-6	State of nationality	FI
III-2-7	State of residence	FI
III-3	Applicant and/or inventor	
III-3-1	This person is	applicant and inventor
III-3-2	Applicant for	US only
III-3-4	Name (LAST, First)	ENESCU, Mihai
III-3-5	Address	Riistapolku 4B 30, 02120 Espoo Finland
III-3-6	State of nationality	RO
III-3-7	State of residence	FI
III-4	Applicant and/or inventor	
III-4-1	This person is	applicant and inventor
III-4-2	Applicant for	US only
III-4-4	Name (LAST, First)	TAN, Shuang
III-4-5	Address	301, Block 8, Building 48, East Zone 1, Tiantongyuan, Changping District Beijing 102218 China
III-4-6	State of nationality	CN
III-4-7	State of residence	CN
III-5	Applicant and/or inventor	
III-5-1	This person is	applicant and inventor
III-5-2	Applicant for	US only
III-5-4	Name (LAST, First)	MAATTANEN, Helka-Liina
III-5-5	Address	Vallilantie 25 B 2, 00510 Helsinki Finland
III-5-6	State of nationality	FI
III-5-7	State of residence	FI



PCT REQUEST

Print Out (Original in Electronic Form)

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent	
IV-1-1	Name	KING & WOOD PRC LAWYERS	
IV-1-2	Address	31/F, Office Tower A, 39 Dongsanhuan Zhonglu, Chaoyang District Beijing 100022 China	
IV-1-3	Telephone No.	+86 10 5878 5588	
IV-1-4	Facsimile No.	+86 10 5878 5544	
IV-1-5	e-mail	patent@kingandwood.com	
IV-1-5(a)	E-mail authorization The receiving Office, the International Searching Authority, the International Bureau and the International Preliminary Examining Authority are authorized to use this e-mail address to send, if the Office or Authority so wishes, advance copies of notifications in respect of this international application.	Yes	
IV-1-6	Agent's registration No.	11256	
V	DESIGNATIONS		
V-1	The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regional and national patents.		
VI-1	Priority Claim	NONE	
VII-1	International Searching Authority Chosen	State Intellectual Property Office of the People's Republic of China (ISA/CN)	
VIII	Declarations	Number of declarations	
VIII-1	Declaration as to the identity of the inventor	—	
VIII-2	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	—	
VIII-3	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	—	
VIII-4	Declaration of inventorship (only for the purposes of the designation of the United States of America)	—	
VIII-5	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	—	



PCT REQUEST

Print Out (Original in Electronic Form)

IX	Check list	number of sheets	electronic file(s) attached
IX-1	Request (including declaration sheets)	4	✓
IX-2	Description	37	✓
IX-3	Claims	8	✓
IX-4	Abstract	1	✓
IX-5	Drawings	8	✓
IX-7	TOTAL	58	
	Accompanying Items	paper document(s) attached	electronic file(s) attached
IX-8	Fee calculation sheet	—	✓
IX-11	Copy of general power of attorney	—	reference no. 033741
IX-18	PCT-SAFE physical media	—	—
IX-20	Figure of the drawings which should accompany the abstract	8	
IX-21	Language of filing of the international application	English	
X-1	Signature of applicant, agent or common representative	(PKCS7 Digital Signature)	
X-1-1	Name	KING & WOOD PRC LAWYERS	
X-1-2	Name of signatory	KING & WOOD PRC LAWYERS	
X-1-3	Capacity	Attorney	

FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	
10-2	Drawings:	
10-2-1	Received	
10-2-2	Not received	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	
10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/CN
10-6	Transmittal of search copy delayed until search fee is paid	

FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--



APPARATUS AND METHOD FOR SELECTION OF BEAM GROUPS AND SUBSET OF BEAMS IN A COMMUNICATION SYSTEM

TECHNICAL FIELD

The present invention is directed, in general, to communication systems and, in particular,
5 to an apparatus, method and system for selecting a beam group and a subset of beams in a
communication system.

BACKGROUND

Long term evolution ("LTE") of the Third Generation Partnership Project ("3GPP"), also
referred to as 3GPP LTE, refers to research and development involving the 3GPP LTE Release 8
10 and beyond, which is the name generally used to describe an ongoing effort across the industry
aimed at identifying technologies and capabilities that can improve systems such as the universal
mobile telecommunication system ("UMTS"). The notation "LTE-A" is generally used in the
industry to refer to further advancements in LTE. The goals of this broadly based project include
improving communication efficiency, lowering costs, improving services, making use of new
15 spectrum opportunities, and achieving better integration with other open standards. The 3GPP
LTE project produces new standards as well as standards recommendations for the UMTS.

The evolved universal terrestrial radio access network ("E-UTRAN") in 3GPP includes
base stations providing user plane (including packet data convergence protocol/radio link
control/medium access control/physical ("PDCP/RLC/MAC/PHY") sublayers) and control plane
20 (including radio resource control ("RRC") sublayer) protocol terminations towards wireless
communication devices such as cellular telephones. A wireless communication device or
terminal is generally known as user equipment (also referred to as "UE"). A base station is an
entity of a communication network often referred to as a Node B or an NB. Particularly in the E-
UTRAN, an "evolved" base station is referred to as an eNodeB or an eNB. For details about the
25 overall architecture of the E-UTRAN, see 3GPP Technical Specification ("TS") 36.300 v8.7.0



(2008-12), which is incorporated herein by reference. For details of the radio resource control management, see 3GPP TS 25.331 v.9.1.0 (2009-12) and 3 GPP TS 36.331 v.9.1.0 (2009-12), which are incorporated herein by reference.

As wireless communication systems such as cellular telephone, satellite, and microwave communication systems become widely deployed and continue to attract a growing number of users, there is a pressing need to accommodate a large and variable number of communication devices that transmit an increasing quantity of data within a fixed spectral allocation and limited transmit power. The increased quantity of data is a consequence of wireless communication devices transmitting video information and surfing the Internet as well as performing ordinary voice communication. To address these ongoing needs, a current topic of general interest in 3GPP is the efficient use of spatially multiplexed cellular transmission. The efficient use of spatially multiplexed transmission can enable a higher data rate to be transmitted per hertz ("Hz") of bandwidth at a limited transmit power level, thereby enabling a larger amount of data to be transmitted by a wireless communication device in a shorter period of time, or, equivalently, accommodation of substantially simultaneous operation of a larger number of wireless communication devices.

In order to meet peak spectral efficiency requirements (up to 30 bit(s)/Hz), support of up to eight transmit ("Tx") antennas in a downlink ("DL") will be standardized in 3GPP LTE Rel-10, enabling downlink spatially multiplexed transmission with up to eight spatial layers. Both eight-transmit downlink multi-input/multi-output ("MIMO") and enhanced multi-user multi-input/multi-output ("MU-MIMO") are now agreed to be part of a Rel-10 work item on enhanced downlink MIMO transmission. Such processes will enable the higher data rate to be transmitted with a limited transmitter power level per hertz of bandwidth.

The processes, however, to enable a wireless communication device to communicate channel state and other related information back to a base station so that spatially multiplexed



transmission in a downlink can be efficiently performed by the base station introduces a number of challenges. One of the more problematic issues is how to deal with the increased communication channel dimensionality and degrees of freedom associated with downlink antenna beam formation without burdening the uplink communication channel for the wireless communication device. Another issue is enabling improved single-user multi-input/multi-output (“SU-MIMO”) performance with large azimuthal spread of the downlink antenna beam space. It is generally recognized that coverage for wireless communication devices located at the crossing of beams in the antenna beam space can be poor with present arrangements.

In view of the growing deployment of communication systems such as cellular communication systems and these unresolved issues, it would be beneficial to employ an improved codebook format to enable a wireless communication device to efficiently determine and communicate channel state and antenna beam characteristics to a base station that avoids the deficiencies of the current communication systems.



SUMMARY OF THE INVENTION

These and other problems are generally solved or circumvented, and technical advantages are generally achieved, by embodiments of the present invention, which include an apparatus, method and system for selecting a beam group and a subset of beams in a communication system.

5 In one embodiment, an apparatus includes a processor and memory including computer program code. The memory and the computer program code are configured to, with the processor, cause the apparatus to measure channel state information on a downlink from a base station, and identify a selected beam group out of a set of beam groups according to a wideband property of the channel state information. The characteristic of the set of beam groups depends on a
10 transmission rank. The memory and the computer program code are further configured to, with the processor, cause the apparatus to identify a selected subset of beams in the selected beam group according to at least one subband. The number of beams in the selected subset of beams is equal to the transmission rank.

The foregoing has outlined rather broadly the features and technical advantages of the
15 present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter, which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures or processes for carrying out the same purposes
20 of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.



BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

5 FIGUREs 1 and 2 illustrate system level diagrams of embodiments of communication systems including a base station and wireless communication devices that provide an environment for application of the principles of the present invention;

 FIGUREs 3 and 4 illustrate system level diagrams of embodiments of communication systems including wireless communication systems that provide an environment for application
10 of the principles of the present invention;

 FIGURE 5 illustrates a system level diagram of an embodiment of a communication element of a communication system for application of the principles of the present invention;

 FIGUREs 6A, 6B, 7A and 7B illustrate graphical representations of embodiments of forming beam groups according to the principles of the present invention; and

15 FIGURE 8 illustrates a flow diagram of an embodiment of a method of operating a communication system according to the principles of the present invention.



DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The making and using of the presently preferred embodiments are discussed in detail below. It should be appreciated, however, that the present invention provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific
5 embodiments discussed are merely illustrative of specific ways to make and use the invention, and do not limit the scope of the invention. In view of the foregoing, the present invention will be described with respect to exemplary embodiments in a specific context of an apparatus, method and system for determining and communicating channel state and antenna beam characteristics from a wireless communication device such as a user equipment to a base station
10 in a communication system. The apparatus, method and system are applicable, without limitation, to any communication system including existing and future 3GPP technologies (*i.e.*, UMTS, LTE, and its future variants such as 4th generation (“4G”) communication systems).

Turning now to FIGURE 1, illustrated is a system level diagram of an embodiment of a communication system including a base station 115 and wireless communication devices (*e.g.*,
15 user equipment) 135, 140, 145 that provides an environment for application of the principles of the present invention. The base station 115 is coupled to a public switched telephone network (not shown). The base station 115 is configured with a plurality of antennas to transmit and receive signals in a plurality of sectors including a first sector 120, a second sector 125, and a third sector 130, each of which typically spans 120 degrees. Although FIGURE 1 illustrates one
20 wireless communication device (*e.g.*, wireless communication device 140) in each sector (*e.g.* the first sector 120), a sector (*e.g.* the first sector 120) may generally contain a plurality of wireless communication devices. In an alternative embodiment, a base station 115 may be formed with only one sector (*e.g.* the first sector 120), and multiple base stations may be constructed to transmit according to co-operative multi-input/multi-output (“C-MIMO”)
25 operation, *etc.*



The sectors (*e.g.* the first sector 120) are formed by focusing and phasing radiated signals from the base station antennas, and separate antennas may be employed per sector (*e.g.* the first sector 120). The plurality of sectors 120, 125, 130 increases the number of subscriber stations (*e.g.*, the wireless communication devices 135, 140, 145) that can simultaneously communicate with the base station 115 without the need to increase the utilized bandwidth by reduction of interference that results from focusing and phasing base station antennas. While the wireless communication devices 135, 140, 145 are part of a primary communication system, the wireless communication devices 135, 140, 145 and other devices such as machines (not shown) may be a part of a secondary communication system to participate in, without limitation, device-to-device and machine-to-machine communications or other communications.

Turning now to FIGURE 2, illustrated is a system level diagram of an embodiment of a communication system including a base station 210 and wireless communication devices (*e.g.*, user equipment) 260, 270 that provides an environment for application of the principles of the present invention. The communication system includes the base station 210 coupled by communication path or link 220 (*e.g.*, by a fiber-optic communication path) to a core telecommunications network such as public switched telephone network ("PSTN") 230. The base station 210 is coupled by wireless communication paths or links 240, 250 to the wireless communication devices 260, 270, respectively, that lie within its cellular area 290.

In operation of the communication system illustrated in FIGURE 2, the base station 210 communicates with each wireless communication device 260, 270 through control and data communication resources allocated by the base station 210 over the communication paths 240, 250, respectively. The control and data communication resources may include frequency and time-slot communication resources in frequency division duplex ("FDD") and/or time division duplex ("TDD") communication modes. While the wireless communication devices 260, 270 are part of a primary communication system, the wireless communication devices 260, 270 and



other devices such as machines (not shown) may be a part of a secondary communication system to participate in, without limitation, device-to-device and machine-to-machine communications or other communications.

Turning now to FIGURE 3, illustrated is a system level diagram of an embodiment of a communication system including a wireless communication system that provides an environment for the application of the principles of the present invention. The wireless communication system may be configured to provide evolved UMTS terrestrial radio access network ("E-UTRAN") universal mobile telecommunications services. A mobile management entity/system architecture evolution gateway ("MME/SAE GW," one of which is designated 310) provides control functionality for an E-UTRAN node B (designated "eNB," an "evolved node B," also referred to as a "base station," one of which is designated 320) via an S1 communication link (ones of which are designated "S1 link"). The base stations 320 communicate via X2 communication links (ones of which are designated "X2 link"). The various communication links are typically fiber, microwave, or other high-frequency metallic communication paths such as coaxial links, or combinations thereof.

The base stations 320 communicate with wireless communication devices such as user equipment ("UE," ones of which are designated 330), which is typically a mobile transceiver carried by a user. Thus, communication links (designated "Uu" communication links, ones of which are designated "Uu link") coupling the base stations 320 to the user equipment 330 are air links employing a wireless communication signal such as, for example, an orthogonal frequency division multiplex ("OFDM") signal. While the user equipment 330 are part of a primary communication system, the user equipment 330 and other devices such as machines (not shown) may be a part of a secondary communication system to participate in, without limitation, device-to-device and machine-to-machine communications or other communications.



Turning now to FIGURE 4, illustrated is a system level diagram of an embodiment of a communication system including a wireless communication system that provides an environment for the application of the principles of the present invention. The wireless communication system provides an E-UTRAN architecture including base stations (one of which is designated 5 410) providing E-UTRAN user plane (packet data convergence protocol/radio link control/media access control/physical) and control plane (radio resource control) protocol terminations towards wireless communication devices such as user equipment 420 and other devices such as machines 425 (*e.g.*, an appliance, television, meter, *etc.*). The base stations 410 are interconnected with X2 interfaces or communication links (designated "X2"). The base stations 410 are also connected 10 by S1 interfaces or communication links (designated "S1") to an evolved packet core ("EPC") including a mobile management entity/system architecture evolution gateway ("MME/SAE GW," one of which is designated 430). The S1 interface supports a multiple entity relationship between the mobile management entity/system architecture evolution gateway 430 and the base stations 410. For applications supporting inter-public land mobile handover, inter-eNB active 15 mode mobility is supported by the mobile management entity/system architecture evolution gateway 430 relocation via the S1 interface.

The base stations 410 may host functions such as radio resource management. For instance, the base stations 410 may perform functions such as internet protocol ("IP") header compression and encryption of user data streams, ciphering of user data streams, radio bearer 20 control, radio admission control, connection mobility control, dynamic allocation of communication resources to user equipment in both the uplink and the downlink, selection of a mobility management entity at the user equipment attachment, routing of user plane data towards the user plane entity, scheduling and transmission of paging messages (originated from the mobility management entity), scheduling and transmission of broadcast information (originated 25 from the mobility management entity or operations and maintenance), and measurement and



reporting configuration for mobility and scheduling. The mobile management entity/system architecture evolution gateway 430 may host functions such as distribution of paging messages to the base stations 410, security control, termination of U-plane packets for paging reasons, switching of U-plane for support of the user equipment mobility, idle state mobility control, and system architecture evolution bearer control. The user equipment 420 and machines 425 receive an allocation of a group of information blocks from the base stations 410.

Additionally, the ones of the base stations 410 are coupled a home base station 440 (a device), which is coupled to devices such as user equipment 450 and/or machines (not shown) for a secondary communication system. The base station 410 can allocate secondary communication system resources directly to the user equipment 420 and machines 425, or to the home base station 440 for communications (*e.g.*, local communications) within the secondary communication system. For a better understanding of home base stations (designated “HeNB”), see 3 GPP TS 32.871 v.9.1.0 (2010-03), which is incorporated herein by reference. While the user equipment 420 and machines 425 are part of a primary communication system, the user equipment 420, machines 425 and home base station 440 (communicating with other user equipment 450 and machines (not shown)) may be a part of a secondary communication system to participate in, without limitation, device-to-device and machine-to-machine communications or other communications.

Turning now to FIGURE 5, illustrated is a system level diagram of an embodiment of a communication element 510 of a communication system for application of the principles of the present invention. The communication element or device 510 may represent, without limitation, a base station, a wireless communication device (*e.g.*, a subscriber station, terminal, mobile station, user equipment, machine), a network control element, a communication node, or the like. The communication element 510 includes, at least, a processor 520, memory 550 that stores programs and data of a temporary or more permanent nature, an antenna 560, and a radio



frequency transceiver 570 coupled to the antenna 560 and the processor 520 for bidirectional wireless communication. The communication element 510 may provide point-to-point and/or point-to-multipoint communication services.

The communication element 510, such as a base station in a cellular network, may be coupled to a communication network element, such as a network control element 580 of a public switched telecommunication network ("PSTN"). The network control element 580 may, in turn, be formed with a processor, memory, and other electronic elements (not shown). The network control element 580 generally provides access to a telecommunication network such as a PSTN. Access may be provided using fiber optic, coaxial, twisted pair, microwave communication, or similar link coupled to an appropriate link-terminating element. A communication element 510 formed as a wireless communication device is generally a self-contained device intended to be carried by an end user.

The processor 520 in the communication element 510, which may be implemented with one or a plurality of processing devices, performs functions associated with its operation including, without limitation, precoding of antenna gain/phase parameters (precoder 521), encoding and decoding (encoder/decoder 523) of individual bits forming a communication message, formatting of information, and overall control (controller 525) of the communication element, including processes related to management of communication resources (resource manager 528). Exemplary functions related to management of communication resources include, without limitation, hardware installation, traffic management, performance data analysis, tracking of end users and equipment, configuration management, end user administration, management of wireless communication devices, management of tariffs, subscriptions, security, billing and the like. For instance, in accordance with the memory 550, the resource manager 528 is configured to allocate primary and second communication resources (*e.g.*, time and frequency communication resources) for transmission of voice communications and data to/from the



communication element 510 and to format messages including the communication resources therefor in a primary and secondary communication system.

The execution of all or portions of particular functions or processes related to management of communication resources may be performed in equipment separate from and/or coupled to the communication element 510, with the results of such functions or processes communicated for execution to the communication element 510. The processor 520 of the communication element 510 may be of any type suitable to the local application environment, and may include one or more of general-purpose computers, special purpose computers, microprocessors, digital signal processors ("DSPs"), field-programmable gate arrays ("FPGAs"), application-specific integrated circuits ("ASICs"), and processors based on a multi-core processor architecture, as non-limiting examples.

The transceiver 570 of the communication element 510 modulates information on to a carrier waveform for transmission by the communication element 510 via the antenna(s) 560 to another communication element. The transceiver 570 demodulates information received via the antenna(s) 560 for further processing by other communication elements. The transceiver 570 is capable of supporting duplex operation for the communication element 510.

The memory 550 of the communication element 510, as introduced above, may be one or more memories and of any type suitable to the local application environment, and may be implemented using any suitable volatile or nonvolatile data storage technology such as a semiconductor-based memory device, a magnetic memory device and system, an optical memory device and system, fixed memory, and removable memory. The programs stored in the memory 550 may include program instructions or computer program code that, when executed by an associated processor, enable the communication element 510 to perform tasks as described herein. Of course, the memory 550 may form a data buffer for data transmitted to and from the communication element 510. Exemplary embodiments of the system, subsystems, and modules



as described herein may be implemented, at least in part, by computer software executable by processors of, for instance, the wireless communication device and the base station, or by hardware, or by combinations thereof. As will become more apparent, systems, subsystems and modules may be embodied in the communication element 510 as illustrated and described herein.

5 Discussion in the 3GPP has recently focused on codebook design for eight base station transmit antennas, which is missing from the new LTE Rel-10 standard. In the RAN1 No. 59 workgroup, it has been agreed to extend the Rel-8 implicit feedback framework to LTE Rel-10. This is based on a modular (or multi-granular) design, combining two feedback components from separate codebooks representing different characteristics of channel state information. One
10 feedback component represents long-term (*e.g.*, wideband) communication channel properties (also referred to as long-term properties), while the other targets short-term (*e.g.*, frequency selective) communication channel properties (also referred to as short-term properties). An example of a long-term property is the directional structure of transmit beams. For example, a user equipment's location may not change quickly and, accordingly, its azimuthal direction may
15 be substantially stationary. Accordingly, the directional structure of transmit beams may be represented with a long-term property. An example of a short-term property is rapid amplitude and phase fluctuations of the over-the-air communication path. Such rapid fluctuations may be represented with a short-term property.

 This communication channel feedback structure is also referred to herein as a double
20 codebook structure. While the missing LTE Rel-10 standard specifications are related to eight base station transmit antennas, the principles of a double codebook structure can be generalized to an arbitrary number of transmit antennas. As introduced herein, a new codebook design and structure for dual codebook-based channel state information ("CSI") feedback in support of downlink SU-/MU-MIMO operation is described for application, without limitation, in LTE Rel-
25 10 and beyond.



The 3GPP LTE downlink MIMO operation is one of several work items under consideration in LTE Rel-10. Two new enhancements to LTE Rel-8/-9 of downlink MIMO are being considered. One enhancement is the optimization of MU-MIMO operation, which benefits from a new reference symbol ("RS") design package that employs precoded user equipment-specific reference symbols (referred in the 3GPP community as UE-RS, or "dedicated reference symbols "DM-RS"), and periodic common state information reference symbols ("CSI-RS" or "CRS"). A second enhancement is extension of downlink transmit operation up to eight-layer downlink SU-MIMO.

These enhancements will be supported by a user equipment feedback mode, following the implicit feedback principles from LTE Rel-8. Accurate channel state information feedback plays an important role for reliable, interference-free (or substantially free) communication, especially for MU-MIMO. Moreover, signaling aspects and codebook sizes are importance when considering extension to eight-transmit SU-/MU-MIMO operation because of the increased communication channel dimensionality and degrees of freedom therein.

The design of an implicit double codebook format dates back to 3GPP Workgroup RAN1 No. 59 where in the slide presentation represented in 3GPP document R1-101683 entitled "Way Forward for Rel-10 Feedback Framework," which is incorporated herein by reference, it was described that a precoder for a subband is composed of two matrices belonging to distinct codebooks. One codebook targets wideband communication channel properties (also referred to as wideband properties) and/or long-term properties, the matrix therefor denoted herein as " W_1 ." The other codebook targets frequency-selective and/or short-term properties, the matrix therefor denoted herein as " W_2 ." The resulting precoder for each subband can be constructed, for example, as the matrix multiplication of the two matrices.

In a recent 3GPP RAN1 meeting, several codebook design proposals and ways of utilizing the long-/short-term properties were presented. Several key design aspects are included



among these proposals: A feedback concept is envisioned to operate with cross-polarized (“XP”) and uniform linear array (“ULA”) array types of base station antenna setups, and hence the codebooks have to be designed and optimized accordingly. The long- and short-term properties can be sampled with the same or different time periodicities and reported accordingly (at same or
5 different time instances). While considering a relatively fixed total feedback rate budget (*i.e.*, a fixed total number of bits over a given time interval), one may try to find the best balance in investing the feedback bits between the long-term and short-term properties. The final precoder is the output of an operation (a matrix multiplication) between the long-term and short-term precoders.

10 The order of short-term and long-term precoder arrangement in such a product can further differentiate the concepts. If the long-term properties are handled next to the communication channel (*i.e.*, the channel matrix “H” is multiplied from the right as $H \cdot W_1$), it can be seen as steering the main antenna beams towards the user equipment signal space, while further refinement can enhance either co-phasing (transmission rank-1) or orthogonality
15 (transmission rank>1) among the beams/precoders at a subband level. This can be seen as a $W_1 \cdot W_2$ matrix multiplication operation. On the other hand, one can create a larger beam space for matrix W_1 , which is further refined by the matrix W_2 multiplied from the left. The final precoder matrix W is the output of a $W_2 \cdot W_1$ matrix multiplication. Arguably these two ways of forming the product of the two codebooks are the same. The main difference is how the beams
20 and refinements of the matrices W_1 and W_2 are defined. A common denominator is the construction of the matrix W_1 using (oversampled) discrete Fourier transform (“DFT”) vectors or matrices.

The way of selecting the matrices W_1 and W_2 at the user equipment of the communication channel is also important from a complexity perspective, and this may impact the
25 performance of the scheme itself. For instance, one feedback proposal may perform best under



an assumption of an exhaustive search over all possible combinations of long-term and short-term precoders (matrices W_1 and W_2), while losing ground under a more practical and less complex precoder selection. While up to eight spatial layers (or streams) are considered, the double codebook concept is mainly considered attractive for lower transmission ranks, namely

5 transmission ranks 1-2, and perhaps also transmission ranks 3-4, while higher transmission ranks might operate relying only on a single feedback component (e.g., matrix W_2), with the other component being conceptually set to the identity matrix (e.g., matrix $W_1=I$).

As presented in the points above, the double codebook concept can be reduced to the definition of beams and beam selection/combining vectors or precoders that are part of the two

10 codebooks. Since the construction of the matrix W_1 may employ oversampled discrete Fourier transform matrices, the designs are effectively some form of the well-known grid-of-beams concept, where the user equipment effectively chooses one beam (a column of a discrete Fourier transform matrix) that provides best transmission performance.

The Rel-10 feedback concept should support both SU-MIMO and MU-MIMO, where

15 SU-MIMO is typical for less correlated scenarios with higher communication channel azimuth (angular) spread, while MU-MIMO is typical for highly correlated scenarios with small azimuth spread. In a case of higher azimuth spread and SU-MIMO operation, just selecting one beam (or multiple beams in case of transmission rank >1) for the whole band as in a usual grid of beams is typically not sufficient for good communication performance, because frequency-selective

20 precoding and beam selection at a subband level is known to perform the best in this situation. On the other hand for very low azimuth spread and MU-MIMO operation, a grid of beams is known to perform well as it is, because in this case wideband and frequency selective precoding achieve very close performance, and wideband precoding is more attractive because of much lower associated feedback overhead. As introduced herein, the traditional grid-of-beams concept



is enhanced so that it still supports low azimuth spread scenarios well, but improves performance of SU-/MU-MIMO operation in scenarios with high azimuth spread.

Main codebooks structures were introduced during a RAN1 No. 61 meeting in Montreal, Canada, May 10 - 14, 2010. However, parts of the concepts are even older. One codebook structure is described in 3GPP TSG-RAN WG1 #61 document R1-102630 entitled "Refinements of Feedback and Codebook Design," Montreal, Canada, May 10 - 14, 2010, which is incorporated herein by reference.

In one proposal for a codebook structure, the precoder matrix W_1 is mainly handled in the wideband sense, compressing the communication channel in the spatial dimension such that the resulting equivalent communication channel matrix $H \cdot W_1$ is of lower dimensionality than the physical transmission communication channel matrix H . Further combining (co-phasing) of the two remaining dimensions (or beams) (for cross-polarized antennas) or orthogonalization between the streams is handled through the matrix W_2 . The precoder matrix W_1 is block diagonal, wherein each block includes columns of oversampled discrete Fourier transform matrices. Careful design of both the matrices W_1 and W_2 can allow supporting both cross-polarized and uniform linear array antenna configuration with the same codebooks. This is achieved by using four bits for the matrix W_1 and two bits for the matrix W_2 . The four bits for the matrix W_1 essentially translates into an oversampling factor of four for discrete Fourier transform matrices in the four-antenna transmit case. The entries in the codebook for the matrix W_2 consist of the Rel-8 2 transmit codebook, as the concept also addresses transmission rank 1-2 operation in Rel-10. The purpose of the precoder matrix W_2 is to handle the cross-polarized combining (co-phasing and orthogonalization) of the W_1 matrix structure, and also to provide support for uniform linear array operation. The main difference compared to the usual grid of beams is that the feedback is based on the double codebook format or structure, wherein the format is used to provide a grid of beams-like operation for both uniform linear array and cross-



polarized-type of arrays with the same feedback. The issue with this scheme is exactly the one referred to previously hereinabove (*i.e.*, the scheme does not allow improved SU-MIMO performance when azimuth spread is higher).

In another proposal, the precoder matrix W_1 selects a set of vectors from the oversampled
 5 discrete Fourier transform matrices. For the case of cross-polarized antennas, four antenna beams are created per polarization, while eight beams are used for uniform linear array. Making use of one bit for matrix W_1 signaling, the codebook splits the codeword (beam) space into two non-overlapping parts and selects one of them to be further used for refinement or proper beam adjustment at a subband level via the precoder matrix W_2 . Note that in the one-bit selected space,
 10 the beams are predefined for further processing; hence the size of the matrix W_1 is an 8x8 matrix in the case of eight transmit antennas. The codebook structure is described in 3GPP TSG-RAN WG1 #61 document R1-102823 entitled "8 Tx Codebook Design," Montreal, Canada, May 10 - 14, 2010, which is incorporated herein by reference.

It is also noted that a main difference with the previous proposal was compressing the
 15 communication channel in the spatial dimension with the matrix W_1 . Allowing a larger space (*i.e.*, with full communication channel dimensionality) to be further processed at a subband level with the matrix W_2 can be seen as an advantage of one of the concepts, especially in scenarios with larger azimuth spread and higher transmission rank SU-MIMO transmission. The precoder matrix W_2 is signaled with four bits, and the associated codebook consists of combiners and
 20 beam selectors for the uniform linear array case.

The freedom of selecting multiple beams per subband, due to the main partitioning operated by the matrix W_1 can be seen as an advantage, especially in SU-MIMO case described hereinabove. However this flexibility brings its own disadvantage as the matrix W_1 cannot be used well alone since the beam space defined by one matrix W_1 is very large. Moreover, due to



the two spaces created with the matrix W_1 , there is poor coverage for the user equipment located at the crossing of the spaces.

In a further proposal, multiple beams are allowed per subband, through the matrix W_1 . The second precoder matrix W_2 refines the matrix W_1 by multiplication to the left (*i.e.*, $W_2 * W_1$), thereby performing a rotation of the initial beam. The first codebook (*i.e.*, the one associated with the matrix W_1) also contains combiners along the main beams and has a larger size of 32 beams in total, while the second codebook (*i.e.*, the one associated with the matrix W_2) may have only 2-3 bits, consisting of several rotation matrices. In fact there are only two inter-pole combiners available for cross-polarized operation, which can be seen as a drawback. A codebook subset restriction for W_1 is also possible. The codebook structure is described in 3GPP TSG-RAN WG1 #61 document R1-103026 entitled "Views on the Feedback Framework for Rel. 10," Montreal, Canada, May 10 - 14, 2010, which is incorporated herein by reference.

A summary of the main proposed concepts is illustrated in TABLE 1 below:

Proposal	# beams	#combiners	W_1	W_2
1	16	4	4-bit beam	2-bit phase
2	8	4	1-bit beam	2-bit beam + 2-bit phase
3	32	2	3-bit beam + 1-bit phase	2-bit phase
4	16	4	2-bit beam	2-bit beam + 2-bit phase

TABLE 1

TABLE II below illustrates feedback rates of the main proposed concepts, considering the same time reporting for the matrices W_1 and W_2 (which affects physical uplink shared channel ("PUSCH") utilization) and 50 physical resource blocks ("PRBs") with six-PRB granularity of the matrix W_2 and 10 millisecond ("ms") periodicity for reporting.



Proposal	W_1	W_2	# bits for W_2 over whole band	# bits in one report	Precoder bit rate
1	4	2	18	22	2200 bps
2	1	4	36	37	3700 bps
3	4	3	27	31	3100 bps
4	2	4	36	38	3800 bps

TABLE II

As introduced herein, a codebook structure is described that provides improved support
 5 for scenarios with low spatial correlation/high azimuth spread wherein improved frequency-selective feedback is required for good performance. The codebook format or structure provides improved support for higher transmission ranks, especially for the case of uniform linear arrays.

The codebook structure is based on similar beam grouping as in the second proposal as described previously hereinabove (*i.e.*, the first part of the feedback signal performs beam group
 10 selection and the second part of the feedback signal performs beam selection from the selected beam group). The first part of the feedback applies to the whole band or the wideband properties, whereas the second part of the feedback is subband-specific. To enable this with the double codebook format or structure, there is a precoder matrix W_1 that contains, for example, discrete Fourier transform-based sub-matrices, and precoder matrices W_2 that contain column selection
 15 vectors and phase shifting such that the actual beams in the beam group are determined by matrix multiplications of the form:

$$W = W_1 * W_2.$$

As introduced herein, groups of beams may overlap. Overlapping beams is intended to cover cases with higher azimuth spread wherein the enhanced wideband/long-term transmit
 20 direction is at the “edges” of two beam groups. Without overlapping of beam groups in such



cases, part of the azimuth spread may not be captured with precoding because it falls in the adjacent beam group. Note that overlapping means here that the groups of beams partly contain the same beams.

Secondly, the number of beam groups and/or beam group size (number of beams in the group) and/or beam group total angular span (total angular range spanned by the beam group) depend on the transmission rank. Typical eight-transmit antenna arrays have very closely physically spaced antennas. Since higher transmission ranks employ fairly uncorrelated communication channels, the communication channel azimuth spread has to be large to allow for higher rank transmission. With the double codebook format or structure, such azimuth spread can be captured properly if the beam group size and total span is large enough such that it covers a large range of azimuth angles. Hence for higher transmission ranks, the beam group size and total span should be made larger. The two aspects thus introduced can be combined. Overlapping groups of beams are constructed, where the size, number, and angular span of the overlapping groups of beams may vary according to the transmission rank.

Hence, user equipment feedback is employed wherein a user equipment first measures the channel state information and then selects the beam group according to wideband or long-term channel state information, wherein the size of each beam group (*i.e.*, a number of beams in each beam group of a set of beam groups) and/or the number of beam groups (*i.e.*, a number of beam groups in a set of beam groups) and/or the total angular span of each beam group (*i.e.*, a total angular domain spanned by each beam group in a set of beam groups) depend on the transmission rank and/or wherein the different beam groups are overlapping. In other words, a characteristic of a set of beam groups includes at least one of a number of beams in each beam group of the set of beam groups, a number of beam groups in the set of beam groups, and a total angular domain spanned by each beam group in the set of beam groups. For each subband, the user equipment selects a subset of the beams in the selected beam group wherein the subset size



is equal to the transmission rank. The user equipment encodes the feedback information into a double codebook or precoder format employing matrices W_1 and W_2 for transmission on an uplink communication channel, and transmits the double codebook format to the base station.

The base station receives the feedback transmitted on an uplink communication channel, decodes the feedback information, and translates it into a double codebook or precoder format or structure (*i.e.*, into matrices W_1 and W_2). The base station computes the final precoder (*i.e.*, the antenna weights) to be used for transmission to the user equipment per frequency subband based on the matrices W_1 and W_2 , for example by matrix multiplication as:

$$W = W_1 * W_2.$$

When transmitting data to the user equipment, the base station does the antenna weighting on the scheduled subbands according to the weights in the matrix W .

To compute the feedback to the base station, the user equipment first measures channel state information. In case of a LTE-based communication system, this measurement could be done using reference signals, for example the CSI-RS in case of eight transmit antennas, or either CSI-RS in case of four transmit antennas (or fewer). The user equipment then obtains the channel state information for the whole system bandwidth or the wideband.

Once the user equipment has obtained channel state information, the feedback can be computed (*i.e.*, the user equipment determines the beam group as well as selecting a beam for each subband). With the double codebook format or structure, the user equipment selects a wideband precoder matrix W_1 and a precoder matrix W_2 for each subband, conditioned on the chosen precoder matrix W_1 . In one aspect, the beam group is selected with the matrix W_1 , while the precoder matrices W_1 and W_2 together form the final beams (precoders) within each beam group. The final precoders are then constructed employing the matrix multiplication:

$$W = W_1 * W_2.$$



Turning now to FIGURES 6A and 6B, illustrated are graphical representations of embodiments of forming beam groups according to the principles of the present invention. It should be understood that the azimuthal gain characteristic of a particular transmit beam is not flat and precisely limited in angular span as represented in the FIGURES. In FIGURE 6A, 5 illustrated are four beam groups for the case of transmission ranks 1-2, each beam group including, for example, of four beams. As illustrated in FIGURE 6B for transmission ranks 3-4, there are two beam groups, but with larger beam group angular (azimuthal) span, each group including, for example, of eight beams. The sizes of the beam groups and/or the number of beam groups and/or total angular span of the beam groups depend on the transmission rank.

10 Exemplary codebook entries for precoder matrices W_1 , W_2 supporting this format or structure are presented below.

Turning now to FIGURES 7A and 7B, illustrated are graphical representations of embodiments of forming beam groups according to the principles of the present invention. In the illustrated embodiment, the beam groups overlap. Note that the number of beam groups, sizes 15 and angular span of each beam group are transmission rank-dependent. Exemplary codebook entries for such a format or structure are presented below.

Both the base station and the user equipment know the codebook constructed using these principles. The user equipment may select the codebook entries using, for example, the following exemplary matrix selection scheme. First, the user equipment computes the wideband 20 communication channel spatial covariance matrix R :

$$R = E\{H^H H\},$$

where E is the expectation operator and the superscript operator “ H ” represents the Hermetian operator (*i.e.*, conjugating and transposing the respective matrix). Again, the (unscripted) H represents the communication channel matrix. The user equipment then utilizes, for example,



and without limitation, one of the following ways to choose the matrix W_1 .

In an exemplary method, the user equipment forms all combinations of the matrices,

$$W = W_1 * W_2$$

by sweeping (searching) over all possible choices for the matrices W_1 and W_2 . The user

- 5 equipment then finds the precoder matrix W that reduces (*e.g.*, minimizes) a chordal, Fubini-Study, or projection two-norm distance to V where the matrix S ,

$$R = USV^H$$

is the singular value decomposition of the matrix R . The matrices U and V are the customary unitary matrices associated with transforming the matrix R into the diagonal matrix S . The

- 10 precoder matrix W_1 is selected as the one corresponding to an enhanced (*e.g.*, optimum) W .

In another exemplary method, the user equipment forms all combinations of the matrices,

$$W = W_1 * W_2$$

by sweeping over all possible choices for the matrices W_1 and W_2 . The user equipment then finds the precoder matrix W that enhances (*e.g.*, maximizes) capacity (*e.g.*, maximizes the

- 15 expression):

$$\det\left(I + \frac{1}{\sigma^2} W^H R W\right)$$

The precoded matrix W_1 is selected as the one corresponding to an enhanced (*e.g.*, optimum) W .

To reduce complexity in the above methods, the combinations,

$$W = W_1 * W_2$$

- 20 could be sampled such that, for example, only one beam from each beam group is selected as representative of that beam group, and the selection is done based on that subset of matrices W , the matrix W_1 is selected that enhances (*e.g.*, maximizes),

$$\det\left(I + \frac{1}{\sigma^2} W_1^H R W_1\right)$$



A second option is to select the matrix W_1 that enhances (e.g., maximizes),

$$\text{trace}\left(I + \frac{1}{\sigma^2} W_1^H R W_1\right).$$

Once the precoder matrix W_1 has been selected, the precoder matrices W_2 are selected per frequency subband, for example, by finding the precoder matrix W_2 that enhances (e.g., maximizes) throughput on a given subband conditioned on the choice of the matrix W_1 .

Once the user equipment has determined the beam group and the beam selection within that beam group per subband, the user equipment encodes the selections for transmission on an uplink communication channel. Both the matrices W_1 and W_2 are encoded as indices in codebooks known both by the base station and the user equipment. The user equipment transmits the index of the selected matrix W_1 as well as the indices of the selected matrices W_2 to the base station (e.g., the double codebook format). In case of an LTE-based communication system, the uplink communication channel used for feedback transmission may be either a physical uplink control channel ("PUCCH") or PUSCH. In case of PUCCH, at least two alternative signaling solutions are envisioned:

In one signaling solution, the index of the matrix W_1 may be encoded together with the transmission rank indicator in a first PUCCH report, and index of the matrix W_2 may be encoded together with channel quality indicators ("CQI(s)") in another PUCCH report. In another signaling solution, the transmission rank indicator is transmitted separately in a first PUCCH report, and the index of the matrix W_1 as well as the index of the matrix W_2 and the CQI(s) are transmitted in another PUCCH report. In an exemplary embodiment, data for the matrix W_1 as and data for the matrix W_2 may be reported with the same frequency, or data for the matrix W_2 may be reported with a higher frequency than data for the matrix W_1 . In case of PUSCH, all information including transmission rank indicator, both codebook indices (e.g., double codebook format) as well as CQI(s) would be transmitted in one PUSCH report. The transmission of



PUSCH feedback reports is typically triggered by the base station, as opposed to PUCCH, which happens periodically according to some semi-static configurations.

The base station obtains the final precoder matrix as a result of the matrix multiplication,

$$W = W_1 * W_2.$$

- 5 As none of the codebook matrices is self-contained, receiving both matrices in one report can be advantageous. However, as the matrix W_1 exploits the long-term properties of the communication channel, reporting of the matrix W_1 can be made with a lower time periodicity, while the matrix W_2 refinement can be sent with a higher time periodicity. Provided that the matrix W_1 is fairly constant over time and non-erroneous transmission has been performed, such
- 10 decoupled signaling can be employed.

- An exemplary codebook design for transmission rank-dependent beam groups with transmission rank 1-4 operation is now described. In this exemplary design, there are four beam groups in the case of transmission ranks 1 and 2, and two beam groups spanning a larger beam space in the case of transmission ranks 3 and 4. The four beam groups in the case of
- 15 transmission ranks 1 and 2 are described with discrete Fourier transform-based block-diagonal matrices as follows.

$$W_1^{(1,2)}(0) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{3\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{3\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} \end{bmatrix}$$



$$W_1^{(1,2)}(1) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ i & e^{i\frac{5\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{15\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & i & e^{i\frac{5\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{15\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(2) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{9\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{11\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{9\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{11\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(3) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{13\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} & 0 & 0 & 0 & 0 \\ i & e^{i\frac{7\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{13\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} \\ 0 & 0 & 0 & 0 & i & e^{i\frac{7\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} \end{bmatrix}$$

The two beam groups in case of transmission ranks 3-4 may be described as follows:



$$W_1^{(3,4)}(n) = \frac{1}{2} \cdot \begin{bmatrix} X(n) & 0 \\ 0 & X(n) \end{bmatrix}, n = 0, 1$$

where

$$X(n) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & (-1)^n & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & (-1)^n \end{bmatrix} \begin{bmatrix} 1 & 1 & 1 & \dots & 1 \\ 1 & e^{j\frac{\pi}{8}} & e^{j(2)\frac{\pi}{8}} & \dots & e^{j(7)\frac{\pi}{8}} \\ 1 & e^{j(2)\frac{\pi}{8}} & e^{j(2)(2)\frac{\pi}{8}} & \dots & e^{j(7)(2)\frac{\pi}{8}} \\ 1 & e^{j(3)\frac{\pi}{8}} & e^{j(2)(3)\frac{\pi}{8}} & \dots & e^{j(7)(3)\frac{\pi}{8}} \end{bmatrix}$$

- Corresponding W_2 vectors/matrices are composed of beam-selection vectors, multiplied
- 5 by a complex number to shift the phase of the vectors. These are listed below in Table 3 only for transmission rank-1, but transmission rank-2-4 designs follow similarly by taking transmission rank 2-4 beam selection vectors with proper phase shifting. In TABLE III below, e_i denotes a 4x1 vector that selects the i th beam, for example,

$$e_2 = [0 \quad 1 \quad 0 \quad 0]^T$$

Index	W_2	Applicable to
0	$1/\sqrt{2}[e_1^T \quad e_1^T]^T$	XP, ULA
1	$1/\sqrt{2}[e_1^T \quad -e_1^T]^T$	XP
2	$1/\sqrt{2}[e_1^T \quad je_1^T]^T$	XP
3	$1/\sqrt{2}[e_1^T \quad -je_1^T]^T$	XP
4	$1/\sqrt{2}[e_2^T \quad e_2^T]^T$	XP
5	$1/\sqrt{2}[e_2^T \quad -e_2^T]^T$	XP



6	$1/\sqrt{2}[e_2^T \quad je_2^T]^T$	XP, ULA
7	$1/\sqrt{2}[e_2^T \quad -je_2^T]^T$	XP
8	$1/\sqrt{2}[e_3^T \quad e_3^T]^T$	XP
9	$1/\sqrt{2}[e_3^T \quad -e_3^T]^T$	XP, ULA
10	$1/\sqrt{2}[e_3^T \quad je_3^T]^T$	XP
11	$1/\sqrt{2}[e_3^T \quad -je_3^T]^T$	XP
12	$1/\sqrt{2}[e_4^T \quad e_4^T]^T$	XP
13	$1/\sqrt{2}[e_4^T \quad -e_4^T]^T$	XP
14	$1/\sqrt{2}[e_4^T \quad je_4^T]^T$	XP
15	$1/\sqrt{2}[e_4^T \quad -je_4^T]^T$	XP, ULA

TABLE III

An exemplary codebook design for overlapping beam groups for transmission rank 1-2 operation are now described. In this exemplary design, there are eight beam groups that partially overlap. The overlap is visible in the W1 matrices by providing some of the columns the same in two adjacent matrices.



$$W_1^{(1,2)}(0) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{3\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{3\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(1) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} & i & e^{i\frac{5\pi}{8}} & 0 & 0 & 0 & 0 \\ i & e^{i\frac{3\pi}{4}} & -1 & e^{i\frac{5\pi}{4}} & 0 & 0 & 0 & 0 \\ e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} & -i & e^{i\frac{15\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & e^{i\frac{\pi}{4}} & e^{i\frac{3\pi}{8}} & i & e^{i\frac{5\pi}{8}} \\ 0 & 0 & 0 & 0 & i & e^{i\frac{3\pi}{4}} & -1 & e^{i\frac{5\pi}{4}} \\ 0 & 0 & 0 & 0 & e^{i\frac{3\pi}{4}} & e^{i\frac{9\pi}{8}} & -i & e^{i\frac{15\pi}{8}} \end{bmatrix}$$



$$W_1^{(1,2)}(2) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ i & e^{i\frac{5\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{15\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & i & e^{i\frac{5\pi}{8}} & e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{15\pi}{8}} & e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(3) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} & -1 & e^{i\frac{9\pi}{8}} & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{7\pi}{4}} & 1 & e^{i\frac{\pi}{4}} & 0 & 0 & 0 & 0 \\ e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} & -1 & e^{i\frac{11\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & e^{i\frac{3\pi}{4}} & e^{i\frac{7\pi}{8}} & -1 & e^{i\frac{9\pi}{8}} \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{7\pi}{4}} & 1 & e^{i\frac{\pi}{4}} \\ 0 & 0 & 0 & 0 & e^{i\frac{\pi}{4}} & e^{i\frac{5\pi}{8}} & -1 & e^{i\frac{11\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(4) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{9\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} & 0 & 0 & 0 & 0 \\ 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{11\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{9\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} \\ 0 & 0 & 0 & 0 & 1 & e^{i\frac{\pi}{4}} & i & e^{i\frac{3\pi}{4}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{11\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} \end{bmatrix}$$



$$W_1^{(1,2)}(5) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} & -i & e^{i\frac{13\pi}{8}} & 0 & 0 & 0 & 0 \\ i & e^{i\frac{3\pi}{4}} & -1 & e^{i\frac{5\pi}{4}} & 0 & 0 & 0 & 0 \\ e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} & i & e^{i\frac{7\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & e^{i\frac{5\pi}{4}} & e^{i\frac{11\pi}{8}} & -i & e^{i\frac{13\pi}{8}} \\ 0 & 0 & 0 & 0 & i & e^{i\frac{3\pi}{4}} & -1 & e^{i\frac{5\pi}{4}} \\ 0 & 0 & 0 & 0 & e^{i\frac{7\pi}{4}} & e^{i\frac{\pi}{8}} & i & e^{i\frac{7\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(6) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{13\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} & 0 & 0 & 0 & 0 \\ -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} & 0 & 0 & 0 & 0 \\ i & e^{i\frac{7\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{13\pi}{8}} & e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} \\ 0 & 0 & 0 & 0 & -1 & e^{i\frac{5\pi}{4}} & -i & e^{i\frac{7\pi}{4}} \\ 0 & 0 & 0 & 0 & i & e^{i\frac{7\pi}{8}} & e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} \end{bmatrix}$$

$$W_1^{(1,2)}(7) = \frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} & 1 & e^{i\frac{\pi}{8}} & 0 & 0 & 0 & 0 \\ -i & e^{i\frac{7\pi}{4}} & 1 & e^{i\frac{\pi}{4}} & 0 & 0 & 0 & 0 \\ e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} & 1 & e^{i\frac{3\pi}{8}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & e^{i\frac{7\pi}{4}} & e^{i\frac{15\pi}{8}} & 1 & e^{i\frac{\pi}{8}} \\ 0 & 0 & 0 & 0 & -i & e^{i\frac{7\pi}{4}} & 1 & e^{i\frac{\pi}{4}} \\ 0 & 0 & 0 & 0 & e^{i\frac{5\pi}{4}} & e^{i\frac{13\pi}{8}} & 1 & e^{i\frac{3\pi}{8}} \end{bmatrix}$$



Corresponding W_2 vectors/matrices are similar as in the first exemplary cookbook design (*i.e.*, these matrices are composed of beam selection column vectors).

Thus, improved support of higher azimuth spread scenarios can be achieved in the case of grid of beams-type of feedback. The whole signal space can be better captured in a frequency selective manner when there is less spatial correlation in the communication channel (*i.e.*, there is a higher azimuth spread). The benefits of grid of beams for MU-MIMO in highly correlated cases are also retained.

Turning now to FIGURE 8, illustrated is a flow diagram of an embodiment of a method of operating a communication system according to the principles of the present invention.

10 Following a start step or module 810, an element of a communication system (*e.g.*, a user equipment and/or base station therein) measures channel state information on a downlink from a base station in a step or module 820. In a step or module 830, a selected beam group out of a set of beam groups is identified according to a wideband property of the channel state information, wherein a characteristic of the set of beam groups depends on a transmission rank. The

15 characteristic of the set of beam groups may be a number of beams in each beam group of the set of beam groups, a number of beam groups in the set of beam groups, and/or a total angular domain spanned by each beam group in the set of beam groups. In a step or module 840, a selected subset of beams in the selected beam group is identified according to at least one subband, wherein a number of beams in the selected subset of beams is equal to the transmission

20 rank. In a step or module 850, encoded feedback information is generated to identify the selected beam group and the selected subset of beams for each subband in a double codebook format. The double codebook format is structured as a first matrix representing the selected beam group and a second matrix representing the selected subset of beams for each subband. The first matrix may be formed employing sets of columns taken from oversampled discrete

25 Fourier transform matrices. The selected beam group may overlap in angular domain with an



adjacent beam group. The selected beam group may be employed to drive eight transmit antennas of a base station. In accordance with the encoded feedback information, a precoder is formed for transmission of a signal in the communication system using the double codebook format, in a step or module 860. The method ends at step or module 870.

5 Thus, an apparatus, method and system are introduced herein for selecting a beam group and a subset of beams in a communication system. In one embodiment, an apparatus (*e.g.*, embodied in a user equipment) includes a processor and memory including computer program code. The memory and the computer program code are configured to, with the processor, cause the apparatus to measure channel state information on a downlink from a base station, and
10 identify a selected beam group out of a set of beam groups according to a wideband property of the channel state information. The characteristic of the set of beam groups depends on a transmission rank. The memory and the computer program code are further configured to, with the processor, cause the apparatus to identify a selected subset of beams in the selected beam group according to at least one subband. The number of beams in the selected subset of beams is
15 equal to the transmission rank.

 Additionally, the memory and the computer program code are further configured to, with the processor, cause the apparatus to generate encoded feedback information identifying the selected beam group and the selected subset of beams for each subband in a double codebook format, and transmit the encoded feedback information to the base station. The double codebook
20 format includes a first matrix representing the selected beam group and a second matrix representing the selected subset of beams for each subband. The first matrix is formed employing sets of columns taken from oversampled discrete Fourier transform matrices. Additionally, the characteristic of the set of beam groups includes at least one of a number of beams in each beam group of the set of beam groups, a number of beam groups in the set of
25 beam groups, and a total angular domain spanned by each beam group in the set of beam groups.



The selected beam group may overlap in angular domain with an adjacent beam group. Also, the selected beam group may characterize eight transmit antennas.

In another embodiment, an apparatus (*e.g.*, embodied in a base station) includes a processor and memory including computer program code. The memory and the computer
5 program code are configured to, with the processor, cause the apparatus to receive encoded feedback information from a user equipment identifying a selected beam group and a selected subset of beams for at least one subband in a double codebook format. The selected beam group represents one of a set of beam groups according to a wideband property of channel state information measured by the user equipment and a characteristic of the set of beam groups is
10 based on a transmission rank. Also, the selected subset of beams in the selected beam group is selected according to the at least one subband and a number of beams in the selected subset of beams is equal to the transmission rank. The memory and the computer program code are further configured to, with the processor, cause the apparatus to form a precoder for transmission of a signal to the user equipment using the double codebook format. Although the apparatus,
15 method and system described herein have been described with respect to cellular-based communication systems, the apparatus and method are equally applicable to other types of communication systems such as a WiMax[®] communication system.

Program or code segments making up the various embodiments of the present invention may be stored in a computer readable medium or transmitted by a computer data signal
20 embodied in a carrier wave, or a signal modulated by a carrier, over a transmission medium. For instance, a computer program product including a program code stored in a computer readable medium may form various embodiments of the present invention. The “computer readable medium” may include any medium that can store or transfer information. Examples of the computer readable medium include an electronic circuit, a semiconductor memory device, a read
25 only memory (“ROM”), a flash memory, an erasable ROM (“EROM”), a floppy diskette, a



compact disk ("CD")-ROM, an optical disk, a hard disk, a fiber optic medium, a radio frequency ("RF") link, and the like. The computer data signal may include any signal that can propagate over a transmission medium such as electronic communication network communication channels, optical fibers, air, electromagnetic links, RF links, and the like. The code segments may be
5 downloaded via computer networks such as the Internet, Intranet, and the like.

As described above, the exemplary embodiment provides both a method and corresponding apparatus consisting of various modules providing functionality for performing the steps of the method. The modules may be implemented as hardware (embodied in one or more chips including an integrated circuit such as an application specific integrated circuit), or
10 may be implemented as software or firmware for execution by a computer processor. In particular, in the case of firmware or software, the exemplary embodiment can be provided as a computer program product including a computer readable storage structure embodying computer program code (*i.e.*, software or firmware) thereon for execution by the computer processor.

Although the present invention and its advantages have been described in detail, it should
15 be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. For example, many of the features and functions discussed above can be implemented in software, hardware, or firmware, or a combination thereof. Also, many of the features, functions and steps of operating the same may be reordered, omitted, added, *etc.*, and still fall within the broad scope
20 of the present invention.

Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture,
25 compositions of matter, means, methods, or steps, presently existing or later to be developed,



that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.



WHAT IS CLAIMED IS:

1. An apparatus, comprising:
a processor; and
memory including computer program code;
5 said memory and said computer program code configured to, with said processor, cause said apparatus to perform at least the following:
measure channel state information on a downlink from a base station,
identify a selected beam group out of a set of beam groups according to a
wideband property of said channel state information, wherein a characteristic of said set of beam
10 groups depends on a transmission rank, and
identify a selected subset of beams in said selected beam group according to at
least one subband, wherein a number of beams in said selected subset of beams is equal to said
transmission rank.
2. The apparatus as recited in Claim 1 wherein said memory and said computer
15 program code is further configured to, with said processor, cause said apparatus to perform at
least the following:
generate encoded feedback information identifying said selected beam group and
said selected subset of beams for each subband in a double codebook format, and
transmit said encoded feedback information to said base station.
- 20 3. The apparatus as recited in Claim 2 wherein said double codebook format
comprises a first matrix representing said selected beam group and a second matrix representing
said selected subset of beams for each subband.
4. The apparatus as recited in Claim 3 wherein said first matrix is formed employing
sets of columns taken from oversampled discrete Fourier transform (DFT) matrices.




5. The apparatus as recited in Claim 1 wherein said characteristic of said set of beam groups comprises at least one of a number of beams in each beam group of said set of beam groups, a number of beam groups in said set of beam groups, and a total angular domain spanned by each beam group in said set of beam groups.

5 6. The apparatus as recited in Claim 1 wherein said selected beam group overlaps in angular domain with an adjacent beam group.

7. An apparatus, comprising:
means for measuring channel state information on a downlink from a base station;
means for identifying a selected beam group out of a set of beam groups according to a
10 wideband property of said channel state information, wherein a characteristic of said set of beam groups depends on a transmission rank; and
means for identifying a selected subset of beams in said selected beam group according to at least one subband, wherein a number of beams in said selected subset of beams is equal to said transmission rank.

15 8. The apparatus as recited in Claim 7, further comprising:
means for generating encoded feedback information identifying said selected beam group and said selected subset of beams for each subband in a double codebook format; and
means for transmitting said encoded feedback information to said base station.

9. A computer program product comprising a program code stored in a computer
20 readable medium configured to:
measure channel state information on a downlink from a base station;
identify a selected beam group out of a set of beam groups according to a wideband property of said channel state information, wherein a characteristic of said set of beam groups depends on a transmission rank; and



identify a selected subset of beams in said selected beam group according to at least one subband, wherein a number of beams in said selected subset of beams is equal to said transmission rank.

10. The computer program product as recited in Claim 9 wherein said program code
5 stored in said computer readable medium is configured to:

generate encoded feedback information identifying said selected beam group and said selected subset of beams for each subband in a double codebook format; and
transmit said encoded feedback information to said base station.

11. A method, comprising:
10 measuring channel state information on a downlink from a base station;
identifying a selected beam group out of a set of beam groups according to a wideband property of said channel state information, wherein a characteristic of said set of beam groups depends on a transmission rank; and
identifying a selected subset of beams in said selected beam group according to at least
15 one subband, wherein a number of beams in said selected subset of beams is equal to said transmission rank.

12. The method as recited in Claim 11, further comprising:
generating encoded feedback information identifying said selected beam group and said selected subset of beams for each subband in a double codebook format; and
20 transmitting said encoded feedback information to said base station.

13. The method as recited in Claim 12 wherein said double codebook format comprises a first matrix representing said selected beam group and a second matrix representing said selected subset of beams for each subband.



14. The method as recited in Claim 11 wherein said characteristic of said set of beam groups comprises at least one of a number of beams in each beam group of said set of beam groups, a number of beam groups in said set of beam groups, and a total angular domain spanned by each beam group in said set of beam groups.

5 15. The method as recited in Claim 11 wherein said selected beam group overlaps in angular domain with an adjacent beam group.



16. An apparatus, comprising:
a processor; and
memory including computer program code;
said memory and said computer program code configured to, with said processor, cause
- 5 said apparatus to perform at least the following:
- receive encoded feedback information from a user equipment identifying a
selected beam group and a selected subset of beams for at least one subband in a double
codebook format, wherein said selected beam group represents one of a set of beam groups
according to a wideband property of channel state information measured by said user equipment
- 10 and a characteristic of said set of beam groups based on a transmission rank, and wherein said
selected subset of beams in said selected beam group is selected according to said at least one
subband and a number of beams in said selected subset of beams is equal to said transmission
rank, and
- form a precoder for transmission of a signal to said user equipment using said
- 15 double codebook format.

17. The apparatus as recited in Claim 16 wherein said double codebook format
comprises a first matrix representing said selected beam group and a second matrix representing
said selected subset of beams for each subband.

18. The apparatus as recited in Claim 17 wherein said first matrix is formed

20 employing sets of columns taken from oversampled discrete Fourier transform (DFT) matrices.

19. The apparatus as recited in Claim 16 wherein said characteristic of said set of
beam groups comprises at least one of a number of beams in each beam group of said set of
beam groups, a number of beam groups in said set of beam groups, and a total angular domain
spanned by each beam group in said set of beam groups.



20. The apparatus as recited in Claim 16 wherein said selected beam group overlaps in angular domain with an adjacent beam group.

21. The apparatus as recited in Claim 16 wherein said selected beam group characterizes eight transmit antennas.

5 22. An apparatus, comprising:

means for receiving encoded feedback information from a user equipment identifying a selected beam group and a selected subset of beams for at least one subband in a double codebook format, wherein said selected beam group represents one of a set of beam groups according to a wideband property of channel state information measured by said user equipment and a characteristic of said set of beam groups based on a transmission rank, and wherein said
10 selected subset of beams in said selected beam group is selected according to said at least one subband and a number of beams in said selected subset of beams is equal to said transmission rank; and

means for forming a precoder for transmission of a signal to said user equipment using
15 said double codebook format.

23. The apparatus as recited in Claim 22 wherein said double codebook format comprises a first matrix representing said selected beam group and a second matrix representing said selected subset of beams for each subband.

24. A computer program product comprising a program code stored in a computer
20 readable medium configured to:

receive encoded feedback information from a user equipment identifying a selected beam group and a selected subset of beams for at least one subband in a double codebook format, wherein said selected beam group represents one of a set of beam groups according to a wideband property of channel state information measured by said user equipment and a



characteristic of said set of beam groups based on a transmission rank, and wherein said selected subset of beams in said selected beam group is selected according to said at least one subband and a number of beams in said selected subset of beams is equal to said transmission rank; and
form a precoder for transmission of a signal to said user equipment using said double
5 codebook format.

25. The computer program product as recited in Claim 24 wherein said double codebook format comprises a first matrix representing said selected beam group and a second matrix representing said selected subset of beams for each subband.

26. A method, comprising:
10 receiving encoded feedback information from a user equipment identifying a selected beam group and a selected subset of beams for at least one subband in a double codebook format, wherein said selected beam group represents one of a set of beam groups according to a wideband property of channel state information measured by said user equipment and a characteristic of said set of beam groups based on a transmission rank, and wherein said selected
15 subset of beams in said selected beam group is selected according to said at least one subband and a number of beams in said selected subset of beams is equal to said transmission rank; and
forming a precoder for transmission of a signal to said user equipment using said double codebook format.

27. The method as recited in Claim 26 wherein said double codebook format
20 comprises a first matrix representing said selected beam group and a second matrix representing said selected subset of beams for each subband.

28. The method as recited in Claim 27 wherein said first matrix is formed employing sets of columns taken from oversampled discrete Fourier transform (DFT) matrices.



29. The method as recited in Claim 26 wherein said characteristic of said set of beam groups comprises at least one of a number of beams in each beam group of said set of beam groups, a number of beam groups in said set of beam groups, and a total angular domain spanned by each beam group in said set of beam groups.

5 30. The method as recited in Claim 26 wherein said selected beam group overlaps in angular domain with an adjacent beam group.



ABSTRACT

An apparatus for selecting a beam group and a subset of beams in a communication system. In one embodiment, an apparatus includes a processor (520) and memory (550) including computer program code. The memory (550) and the computer program code are

5 configured to, with the processor, cause the apparatus to measure channel state information on a downlink from a base station, and identify a selected beam group out of a set of beam groups according to a wideband property of the channel state information. The characteristic of the set of beam groups depends on a transmission rank. The memory (550) and the computer program code are further configured to, with the processor, cause the apparatus to identify a selected

10 subset of beams in the selected beam group according to at least one subband. The number of beams in the selected subset of beams is equal to the transmission rank.

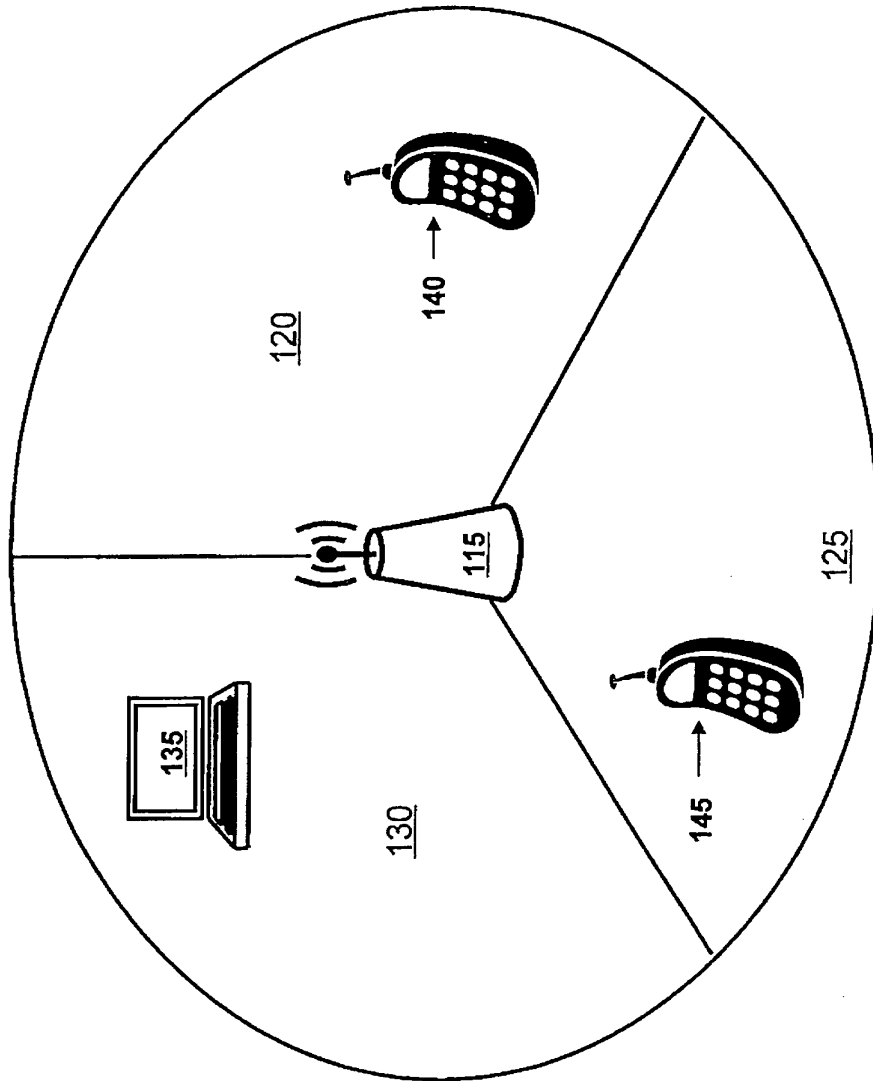


FIGURE 1

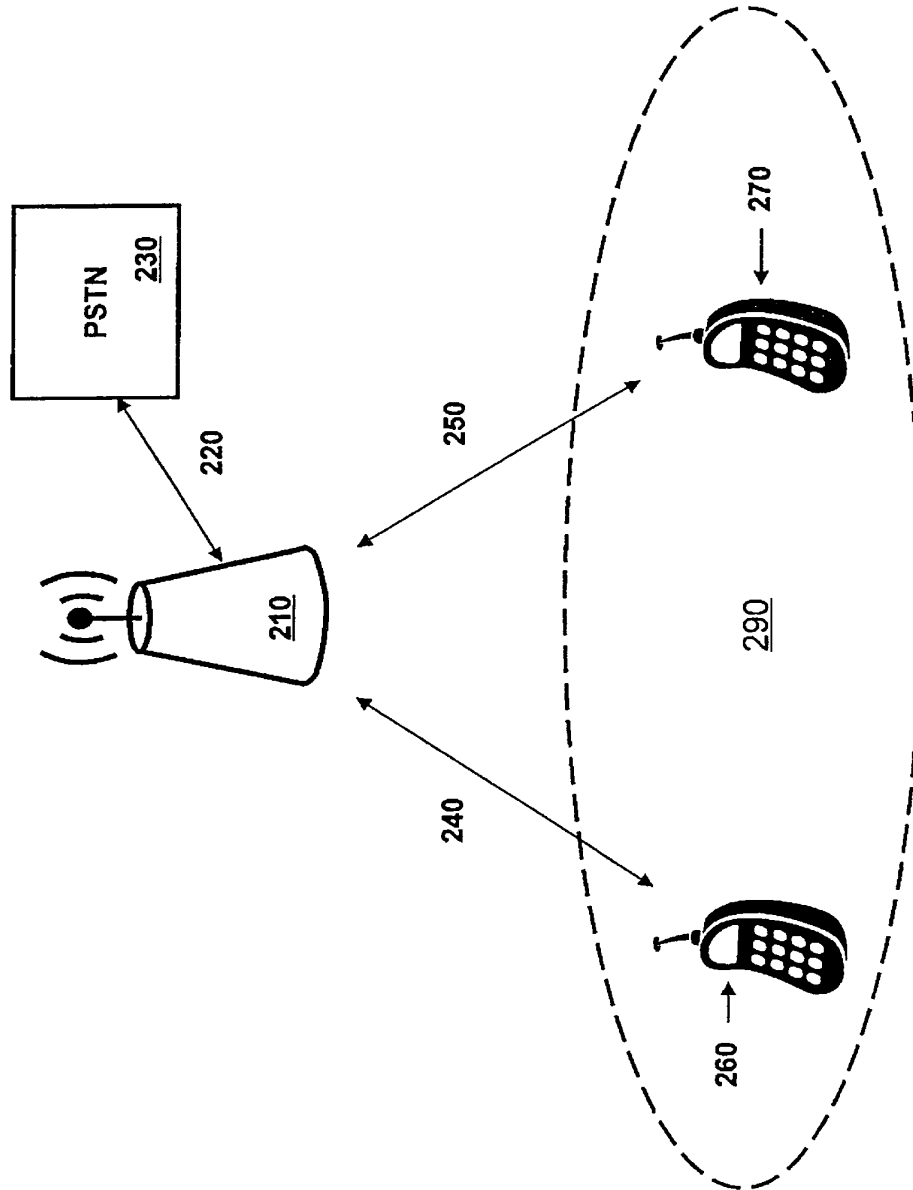


FIGURE 2

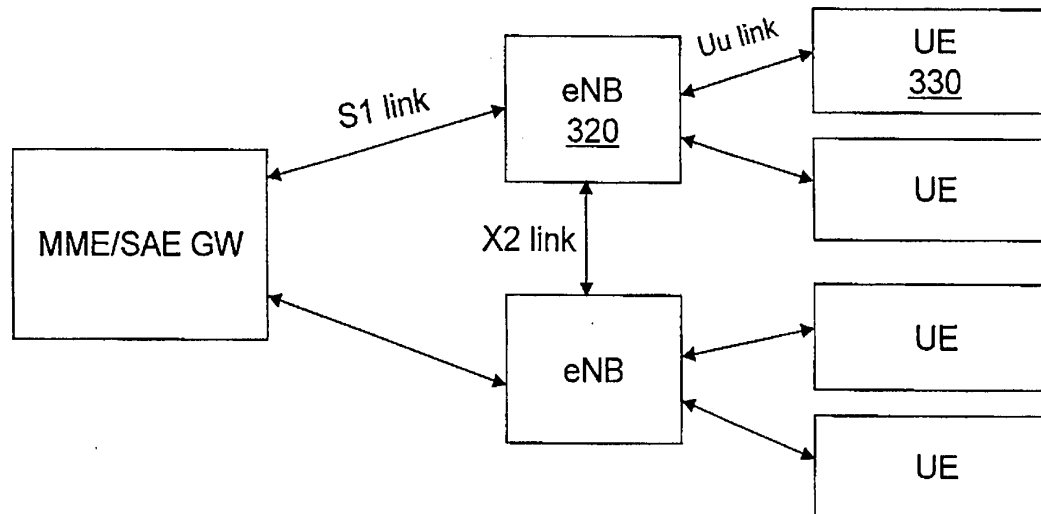
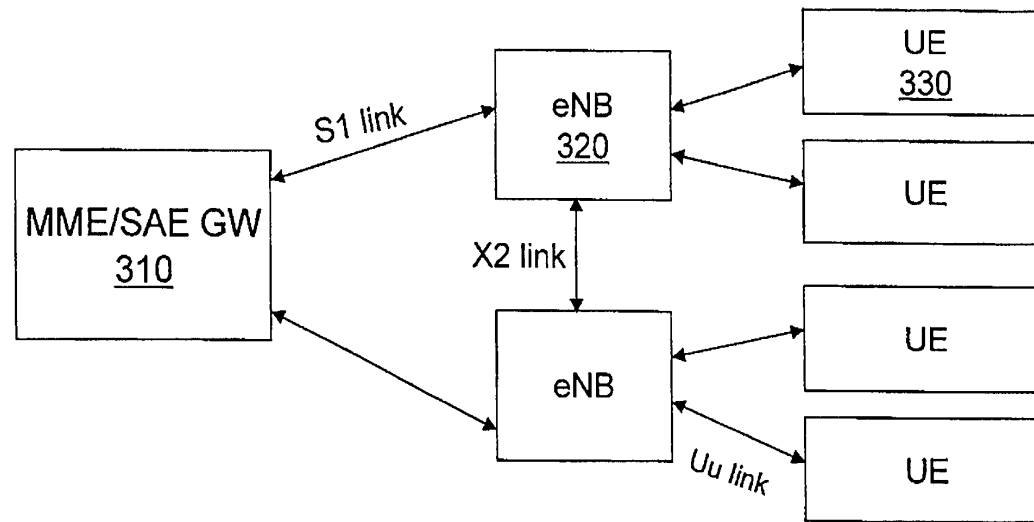


FIGURE 3



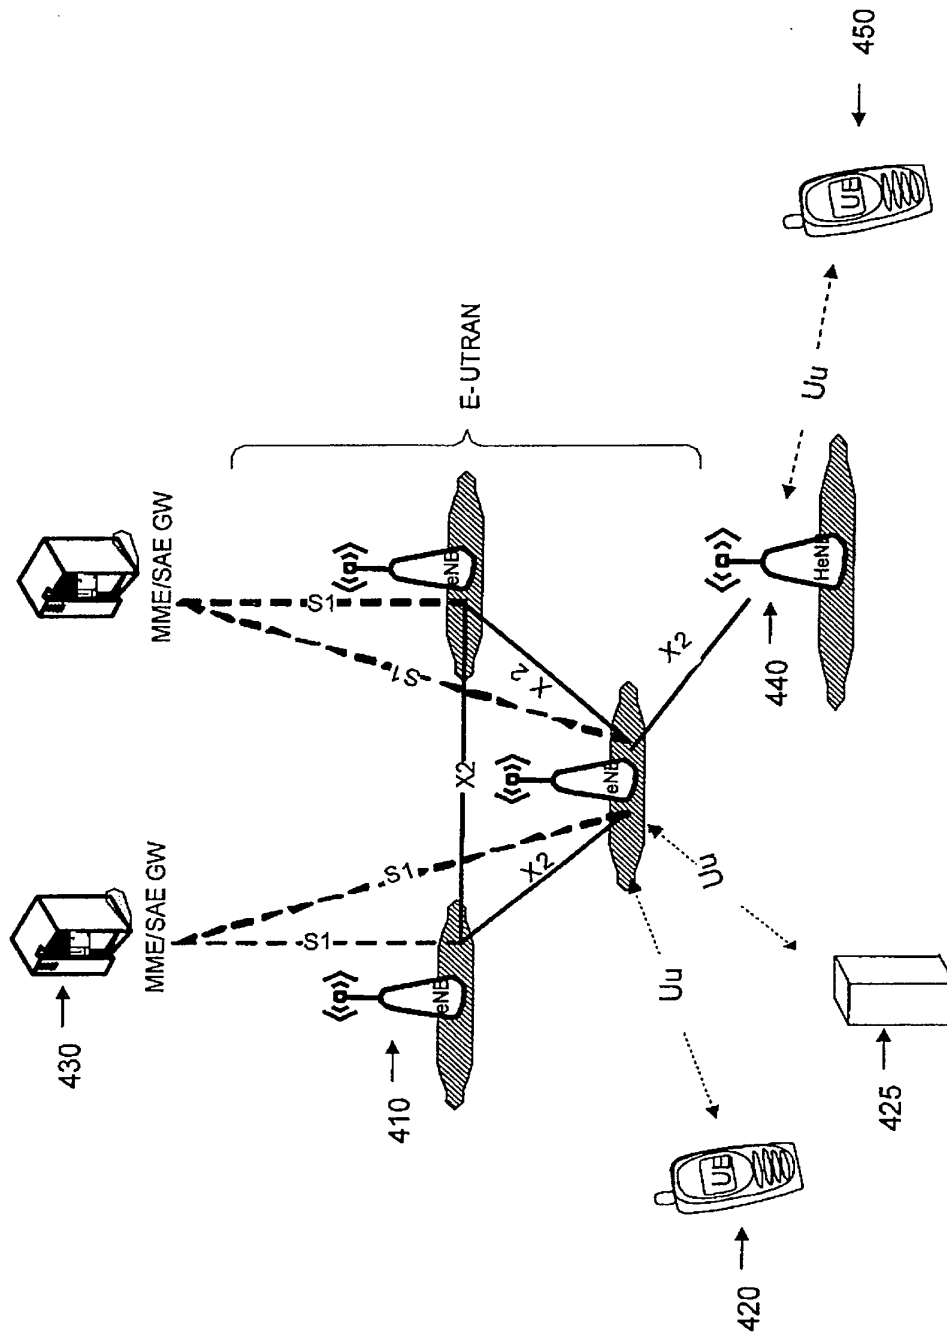


FIGURE 4

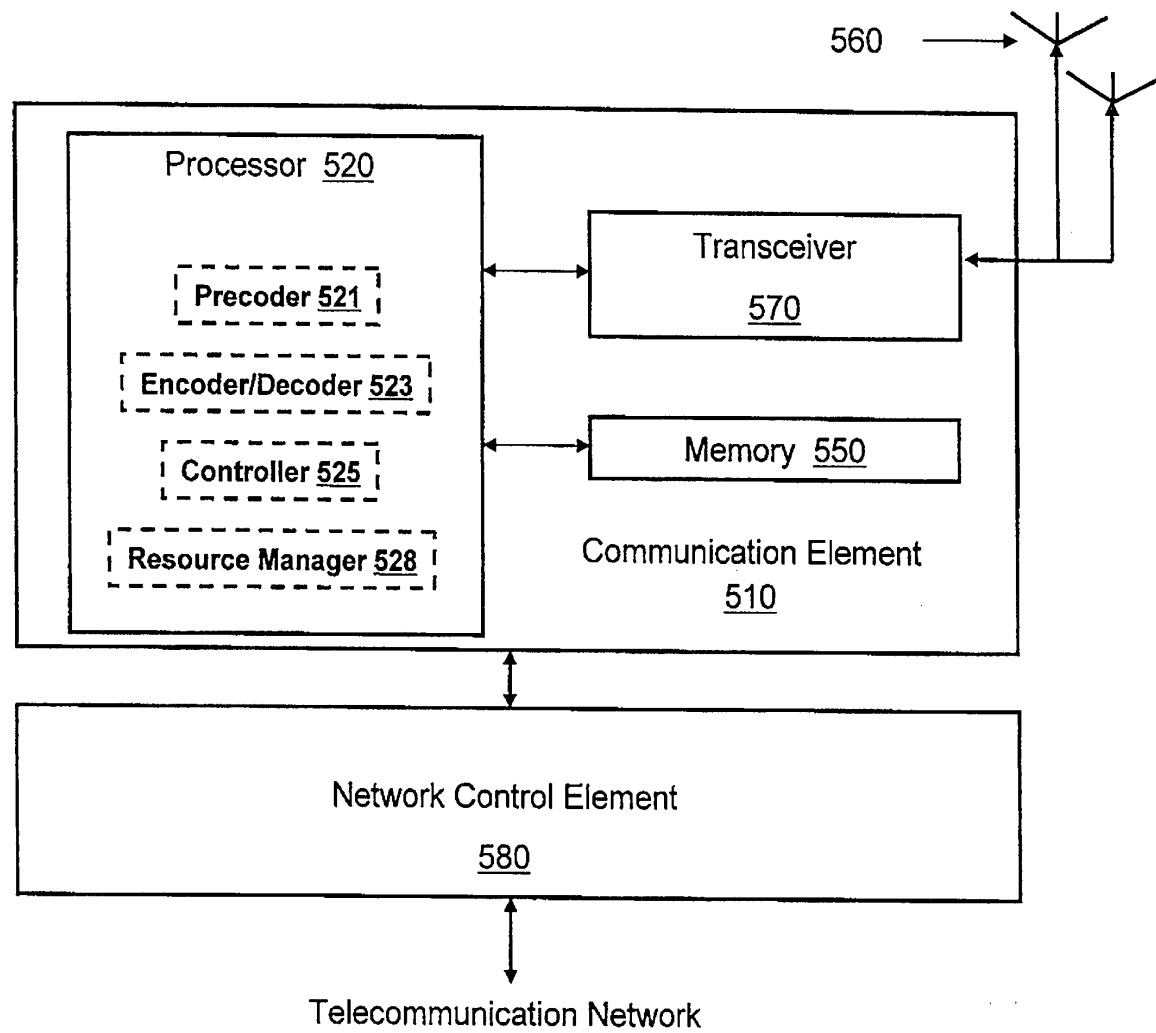


FIGURE 5



6/8

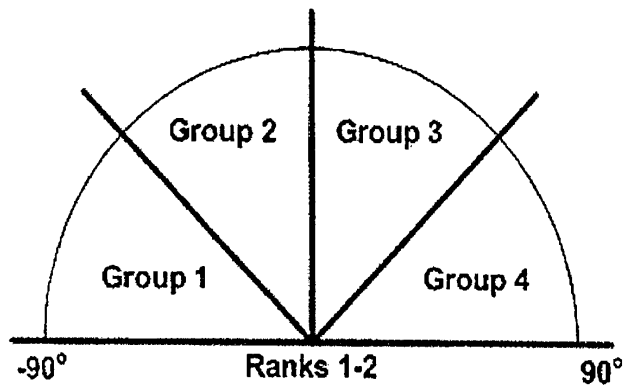


FIGURE 6A

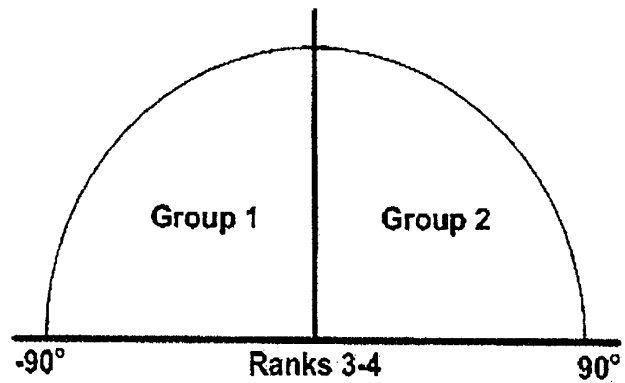


FIGURE 6B

6/8

EIE100124PCT



FIGURE 7A


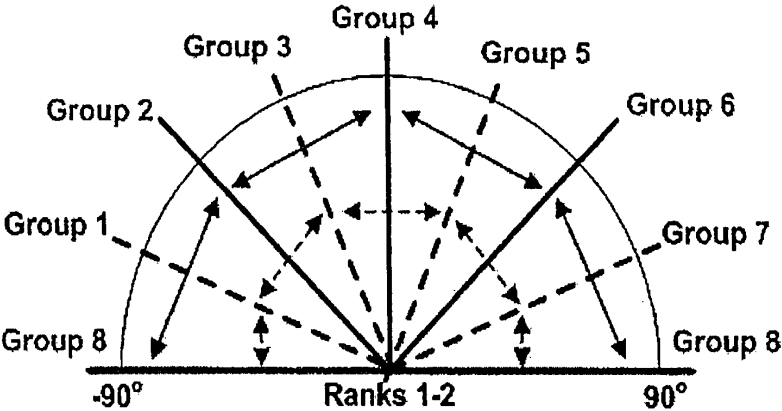


FIGURE 7B

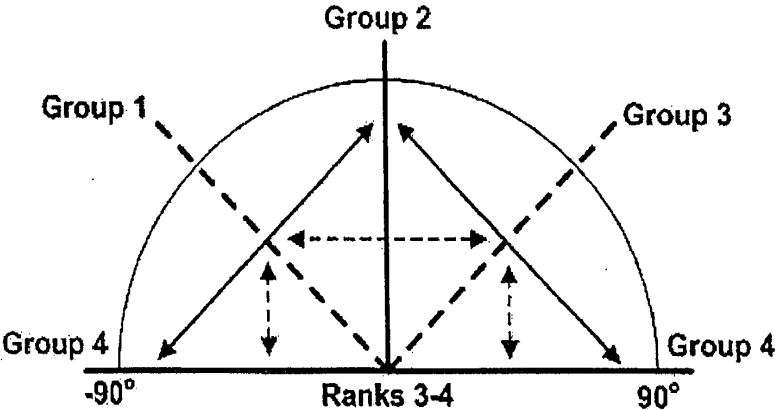

7/8

7/8

EIE100124PCT



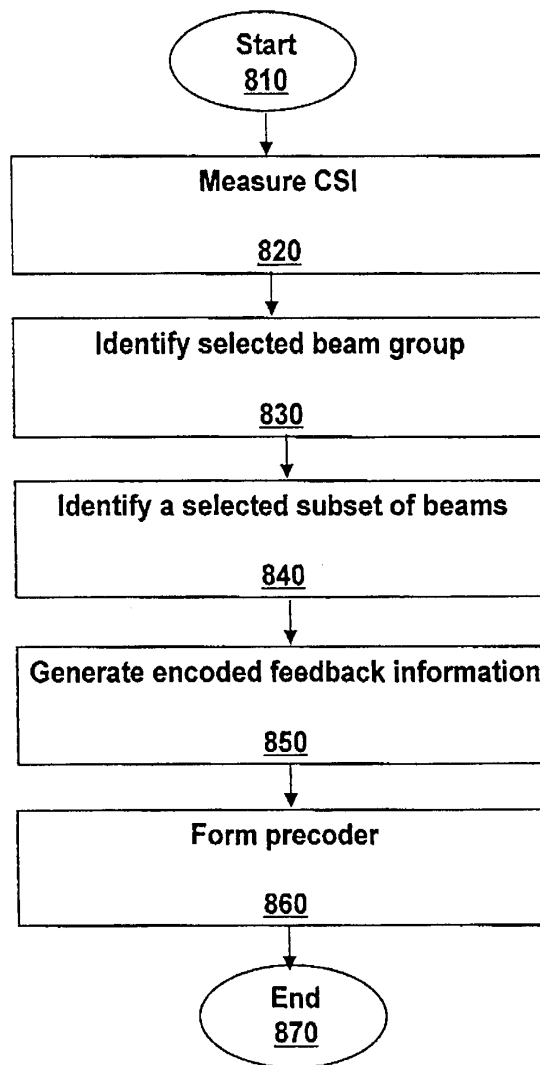


FIGURE 8



Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/CN2010/073463

International filing date: 02 June 2010 (02.06.2010)

Document type: Certified copy of priority document

Document details: Country/Office: CN
Number: PCT/CN2010/073411
Filing date: 01 June 2010 (01.06.2010)

Date of receipt at the International Bureau: 23 September 2010 (23.09.2010)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-*bis*)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse