



US006645228B2

(12) **United States Patent**
Renz

(10) **Patent No.:** **US 6,645,228 B2**
(45) **Date of Patent:** **Nov. 11, 2003**

(54) **NIPPLE**

(75) **Inventor:** **Charles John Renz**, Briarcliff Manor,
NY (US)

(73) **Assignee:** **Playtex Products, Inc.**, Westport, CT
(US)

(*) **Notice:** Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 24 days.

(21) **Appl. No.:** **10/054,510**

(22) **Filed:** **Nov. 13, 2001**

(65) **Prior Publication Data**

US 2003/0093120 A1 May 15, 2003

(51) **Int. Cl.⁷** **A61J 17/00**

(52) **U.S. Cl.** **606/236; 215/11.5**

(58) **Field of Search** 606/234, 235,
606/236; 215/11.4, 11.5

(56) **References Cited**

U.S. PATENT DOCUMENTS

956,741 A	5/1910	Smith	
1,099,082 A	6/1914	Decker	
1,541,330 A	6/1925	Decker	
1,858,356 A	5/1932	Brown	
2,196,870 A	4/1940	Little	128/252
D130,791 S	12/1941	Porthouse et al.	
2,269,223 A	1/1942	Porthouse et al.	128/252
2,509,129 A	5/1950	Buck	215/11
2,741,385 A	4/1956	Raiche	215/11
2,977,013 A	3/1961	Clemens	215/11
3,203,569 A	8/1965	Shomock et al.	215/11
3,211,315 A	10/1965	Griesinger	215/11
3,272,202 A	9/1966	Soto	128/252
3,664,535 A	5/1972	Mette	215/11 R
3,677,429 A	7/1972	La Barge	215/11 C
3,777,753 A	12/1973	Kesselring et al.	128/252
4,238,040 A	12/1980	Fitzpatrick	215/11.3
D286,071 S	10/1986	Fuller	D24/46
D288,240 S	2/1987	Fuller	D24/46
D288,241 S	2/1987	Fuller	D24/46
4,676,386 A	6/1987	Phlaphongphanich	215/11 R

D294,735 S	3/1988	Morano et al.	D24/196
D300,462 S	3/1989	English et al.	D24/45
4,834,099 A	5/1989	Schrooten	128/360
D303,839 S	10/1989	Fitzpatrick et al.	D24/194
5,101,991 A *	4/1992	Morifuji et al.	215/11.1
5,129,532 A	7/1992	Martin	215/11.1
D330,938 S	11/1992	Sakashita	D24/196
5,269,426 A	12/1993	Morano	215/11.6
5,419,445 A	5/1995	Kaesemeyer	215/11.1
D360,468 S	7/1995	Fuller	D24/196
5,617,972 A	4/1997	Morano et al.	221/33
D381,752 S	7/1997	McCoy	D24/196
5,653,732 A	8/1997	Sheehy	606/236
5,747,083 A	5/1998	Raymond et al.	426/117
5,806,711 A	9/1998	Morano et al.	221/33
D405,530 S	2/1999	Manganiello et al.	D24/196
5,878,899 A	3/1999	Manganiello et al.	215/11.6
5,881,893 A	3/1999	Manganiello	215/11.5
D411,886 S	7/1999	Manganiello	D24/197
5,921,426 A	7/1999	Randolph	220/495.06
D412,582 S	8/1999	Morano	D24/197
D417,275 S	11/1999	Conforti	D24/130
6,003,698 A	12/1999	Morano	215/11.1
6,032,810 A	3/2000	Meyers et al.	215/11.1
6,053,342 A	4/2000	Chomik	215/11.5
D433,143 S	10/2000	Chomik et al.	D24/197
D441,086 S	4/2001	Morano	D24/197
D441,870 S	5/2001	Randolph	D24/196
6,253,935 B1 *	7/2001	Fletcher	606/236

* cited by examiner

Primary Examiner—Kevin T. Truong


(74) *Attorney, Agent, or Firm*—Ohlandt, Greetley,
Ruggiero & Perle, LLP

(57)

ABSTRACT

A nipple simulating the shape and function of a woman's breast is provided. The nipple has a stem and a base. The nipple preferably has a securing structure integrally formed to the base. The base has an areola region and a bulbous region. The areola region is positioned between the stem and the bulbous region, and is designed to simulate the shape of the areola region of a woman's breast. The bulbous region is positioned between the areola region and the securing structure, and is designed to simulate the shape of the region of a woman's breast surrounding the areola region.

68 Claims, 4 Drawing Sheets

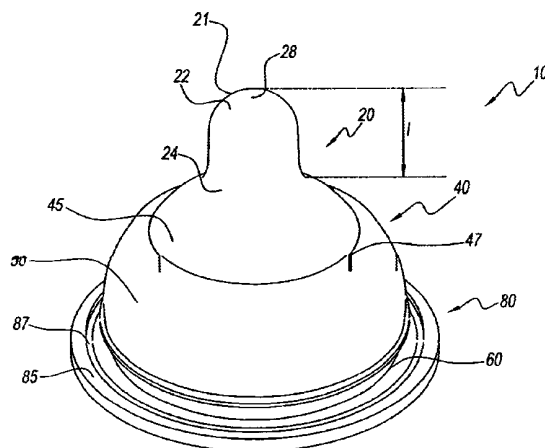

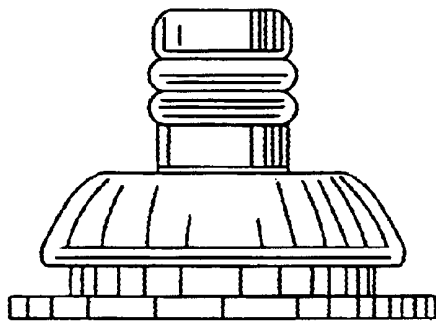


Fig. 1
(Prior Art)

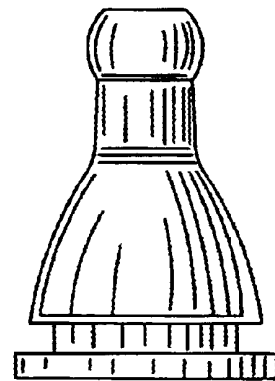


Fig. 2
(Prior Art)

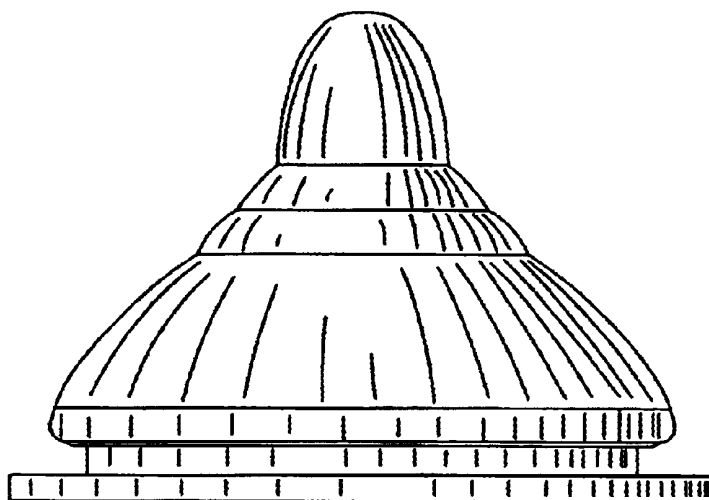
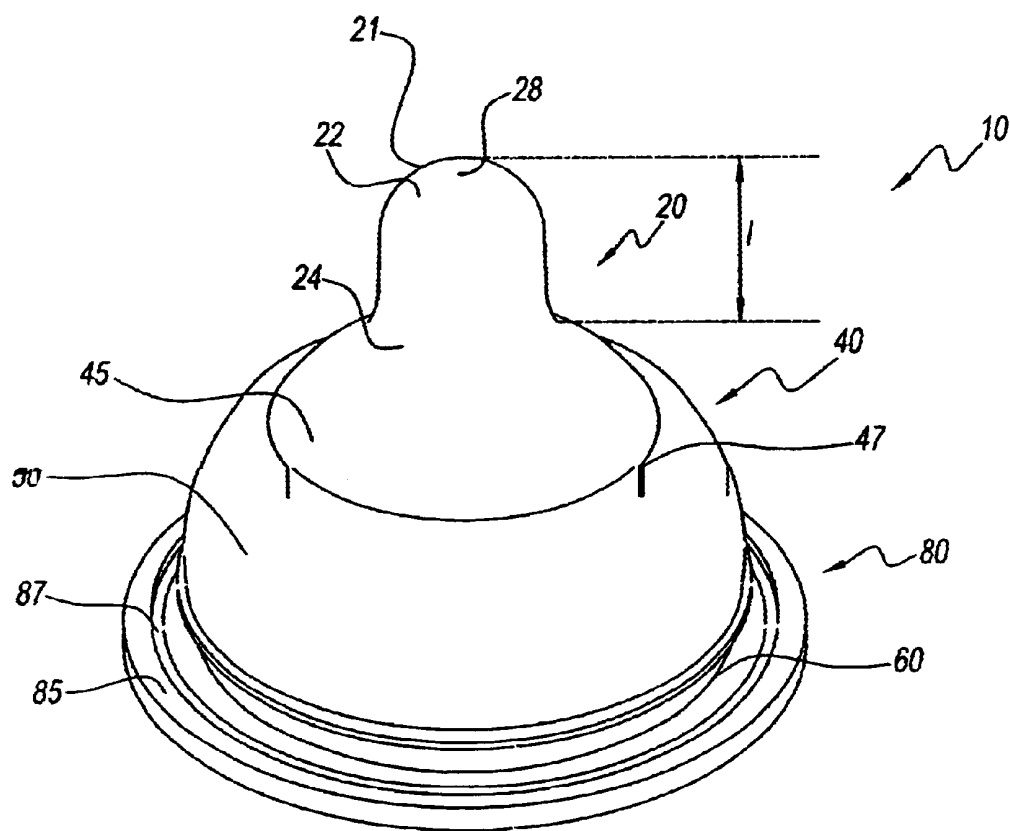
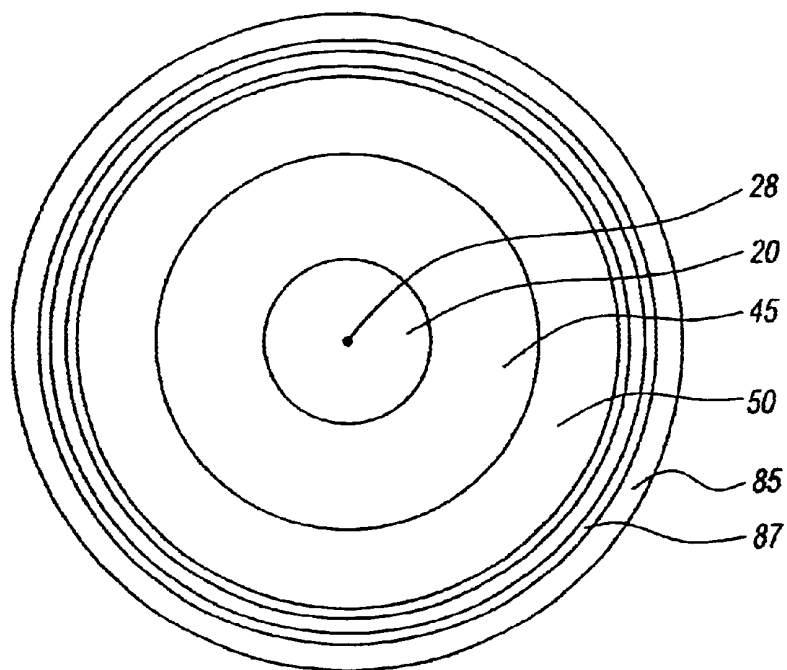
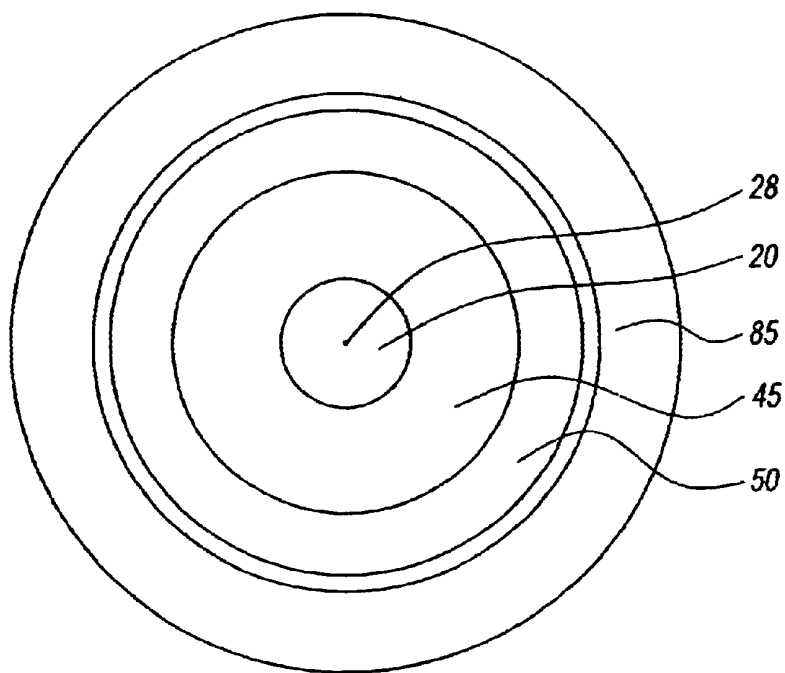


Fig. 3
(Prior Art)

*Fig. 4*

*Fig. 5**Fig. 6*

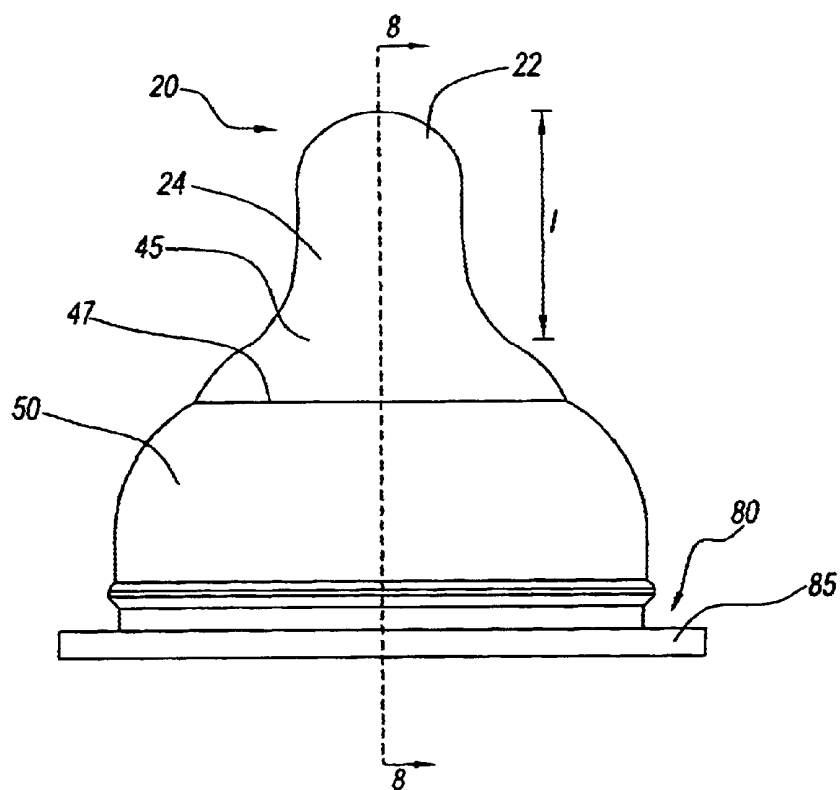


Fig. 7

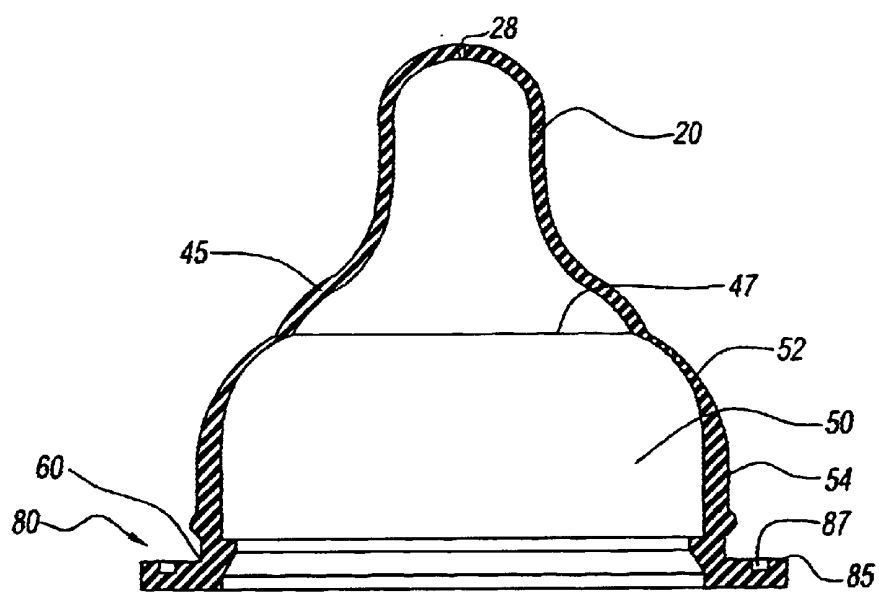


Fig. 8

1 NIPPLE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to baby bottle nipples. More particularly, the present invention relates to baby bottle nipples that simulate a woman's breast.

2. Description of the Prior Art

Baby bottle nipples for feeding babies from bottles are known. Such devices allow mothers to bottle-feed their babies as a temporary or permanent alternative to breast-feeding. Babies become accustomed to the shape and function of a woman's breast during breast-feeding. Due to the significant differences in the shape and function between a woman's breast and conventional baby bottle nipples, babies experience difficulty in transitioning from breast-feeding to bottle-feeding. This can cause a baby to fail to take formula from a baby bottle nipple. Likewise, babies can grow accustomed to the shape and function of a particular conventional baby bottle nipple, creating difficulty for the baby to return to breast-feeding. This can cause a baby to fail to take milk from a woman's breast because of a developed preference for the shape and function of the baby bottle nipple.

In U.S. Pat. No. 5,653,732 to Sheehy, a nipple that claims to have a "natural form" is disclosed. The nipple has an annular rim; lower, intermediate and upper segments; and a tip. The annular rim is used as a securing structure and is adjacent to and integrally formed with the lower segment having a large curved outer surface. The lower segment is adjacent to and integrally formed with the intermediate segment that has a smaller curved outer surface and is smaller than the lower segment. The intermediate segment is adjacent to and integrally formed with the upper segment that has a smaller curved outer surface than the intermediate segment. The upper segment is adjacent to and integrally formed with the tip. The disclosed nipple suffers from the drawback of having three segments or areas that do not simulate the shape and function of a woman's breast.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a nipple with an improved design.

It is another object of the present invention to provide a nipple that assists babies in the transition between breast-feeding and bottle-feeding.

It is still another object of the present invention to provide such a nipple with a shape and function simulating a woman's breast.

These and other objects and advantages of the present invention are provided by a nipple that comprises a tapered stem that is connected to a base that is further connected to a securing structure. The base comprises an areola region and a bulbous region. The areola region is positioned between the stem and the bulbous region, and is designed to simulate the shape of the areola region of a woman's breast. The bulbous region is positioned between the areola region and the securing structure, and is designed to simulate the shape of the region of a woman's breast surrounding the areola region.

Other and further objects, advantages and features of the present invention will be understood by reference to the following.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view of a prior art PLAYTEX® conventional nipple;

2

FIG. 2 is a plan view of a prior art EVENFLO® conventional nipple;

FIG. 3 is a plan view of the nipple disclosed in U.S. Pat. No. 5,653,732;

FIG. 4 is a perspective view of the nipple of the present invention;

FIG. 5 is a top view of the nipple of FIG. 4;

FIG. 6 is a bottom view of the nipple of FIG. 4;

FIG. 7 is a plan view of the nipple of FIG. 4; and

FIG. 8 is a cross sectional view of the nipple of FIG. 7 taken along line 8—8.

DESCRIPTION OF THE INVENTION

Referring to the drawings and, in particular, FIGS. 1 through 3, there is shown the prior art. FIG. 1 is a commercial PLAYTEX® nipple. FIG. 2 is a commercial EVENFLO® nipple. Both of these nipples do not simulate the shape and function of a woman's breast. FIG. 3 is the nipple of U.S. Pat. No. 5,653,732. This nipple has three separate segments and a tip. This prior art nipple also does not simulate the shape and function of a woman's breast.

Referring to FIG. 4, there is shown an embodiment of a nipple of the present invention generally represented by reference numeral 10. Nipple 10 has a stem 20 and a base 40 connected to the stem. Nipple 10 preferably also has a securing structure 80.

Referring to FIGS. 4 and 5, stem 20 has a first end 22, a second end 24 and a length 1. Base 40 has an areola region 45 and a bulbous region 50.

Stem 20 is substantially cylindrical in shape and is tapered toward a curved apex surface 21 of first end 22. The tapered shape of stem 20 towards first end 22 promotes proper "latch on" by the baby. During breast-feeding, the baby latches on to the areola region of the woman's breast. Conventional nipples often promote latching on to the stem by having an indent located along the stem or being of a uniform cylindrical shape. This improper latching on promotes "nipple confusion," i.e., a baby forgets how to properly latch-on to a mother's breast. The present invention provides tapered stem 20 that promotes latching on to areola region 45. The tapered shape of stem 20 causes the baby to slide past the stem and on to areola region 45.

The present invention further provides an elongated stem 20. Stem 20 is elongated to simulate the extended stem of a woman's breast during breast-feeding, which has a shorter length when not breast-feeding. Preferably, length 1 is about 16.0 millimeters (mm) to about 26.0 mm. More preferably, length 1 is about 19.0 mm to about 23.0 mm.

First end 22 of stem 20 has curved apex surface 21 with at least one hole 28 located therethrough. Preferably, hole 28 is located at or about the center point of surface 21 and first end 22. Hole 28 preferably has a diameter about 0.15 mm to about 0.80 mm, and more preferably from about 0.22 mm to about 0.45 mm. Second end 24 preferably has a substantially circular shape. Preferably, first end 22 has a diameter of about 9.0 mm to about 16.0 mm, and second end 24 has a diameter of about 12.0 mm to about 23.0 mm. More preferably, first end 22 has a diameter of about 10.0 mm to about 14.0 mm, and second end 24 has a diameter of about 13.0 mm to about 16.0 mm. Preferably, stem 20 has a wall thickness of about 0.8 mm to about 2.0 mm. More preferably, stem 20 has a wall thickness of about 1.0 mm to about 1.4 mm.

Referring to FIGS. 4 through 7, second end 24 of stem 20 is secured to and surrounded by areola region 45 of base 40.

3

Preferably, second end **24** is integrally formed with areola region **45**. Areola region **45** is designed to simulate the areola region of a woman's breast. Areola region **45** has an outwardly curved shape providing a raised appearance and feel. This raised appearance and feel allows a baby to latch on to areola region **45** just as a baby would latch on to the areola region of a woman's breast during breast-feeding. Preferably, areola region **45** has a radius of curvature of about 3.5 mm to about 13.0 mm. More preferably, areola region **45** has a radius of curvature of about 5.0 mm to about 10.0 mm. Preferably, areola region **45** has a wall thickness of about 0.8 mm to about 2.0 mm. More preferably, areola region **45** has a wall thickness of about 1.0 mm to about 1.4 mm.

Areola region **45** is connected to and surrounded by bulbous region **50** along areola edge **47**. Preferably, areola edge **47** is circular. More preferably, areola edge **47** has a diameter of about 26.0 mm to about 37.0 mm, and even more preferably a diameter of about 30.0 mm to about 35.0 mm. Preferably, areola region **45** is integrally formed with bulbous region **50** along areola edge **47**. Bulbous region **50** is designed to simulate the region of a woman's breast that surrounds the areola region. Bulbous region **50** has an outwardly curved or convex shape. In the preferred embodiment, the surface area of bulbous region **50** is greater than the surface area of areola region **45**. As shown in the top view of FIG. 5, areola region **45** is substantially concentrically aligned with bulbous region **50**. Also, in the top view, stem **20** is substantially concentrically aligned with both areola region **45** and bulbous region **50**.

Referring to FIGS. 7 through 8, bulbous region **50** comprises an upper portion **52** and a lower portion **54**. Upper portion **52** extends curvingly downward from areola edge **47**. Preferably, upper portion **52** has a radius of curvature of about 10.0 mm to about 19.0 mm. More preferably, upper portion **52** has a radius of curvature of about 11.5 mm to about 14.0 mm. Lower portion **54** extends substantially vertically downward from upper portion **52**.

Referring to FIGS. 4 and 8, upper portion **52** has a wall thickness that narrows towards areola edge **47**. Preferably, the wall thickness of upper portion **52** gradually narrows towards areola edge **47**. Upper portion **52** preferably has a minimum wall thickness of about 0.5 mm to about 1.0 mm. More preferably, upper portion **52** has a minimum wall thickness of about 0.63 mm to about 0.89 mm. Preferably, lower portion **54** has a wall thickness of about 1.0 mm to about 2.1 mm. More preferably, lower portion **54** has a wall thickness of about 1.3 mm to about 1.9 mm.

The narrowed wall thickness of upper portion **52** extends along the outside of areola region **45** to provide a flexibility to nipple **10** that allows areola region **45** and stem **20** to function more similarly to a woman's breast. When an axial force is applied to nipple **10** substantially along the center axis, i.e., the pushing and pulling force of the baby's sucking, the narrowed wall thickness of upper portion **52** allows areola region **45** and stem **20** to move substantially along the center axis in the direction of the applied force. This occurs because the narrowed wall thickness of upper portion **52** acts as a spring element. When the axial force is removed, areola region **45** and stem **20** return to their unbiased position.

Bulbous region **50** is connected to and surrounded by securing structure **80** along bulbous edge **60**. Preferably, bulbous edge **60** is circular. More preferably, bulbous edge **60** has a diameter of about 38.0 mm to about 48.0 mm, and even more preferably a diameter of about 41.0 mm to about

4

45.0 mm. Preferably, bulbous region **50** is integrally formed with securing structure **80** along bulbous edge **60**.

Securing structure **80** has a flange **85**. Flange **85** extends outwardly from bulbous edge **60** and is preferably circular in shape. Preferably, flange **85** is integrally formed with and surrounds bulbous edge **60**. Flange **85** extends from bulbous edge **60** about 3.5 mm to about 7.5 mm, and preferably about 4.5 mm to about 6.5 mm. Flange **85** allows a nipple ring or other securing device to sealingly engage nipple **10** to a baby bottle (not shown) through a downward compression force upon the upper surface of the flange against the rim or leading edge of the baby bottle. Flange **85** preferably has a securing channel **87** formed therein. Securing channel **87** is an annular groove on the upper surface of the flange. Securing channel **87** can be used for locking flange **85** to a nipple ring or other securing device that has an annular rib (not shown) aligned with and over the securing channel.

Nipple **10** is preferably made of silicone, latex, or other rubber materials. This material provides flexibility to nipple **10** that further simulates the function of a woman's breast during breast-feeding.

For example, nipple **10** can be positioned between a nipple ring having a concentric hole, internal threads and an annular ring on its lower surface (not shown), and a baby bottle having external threads on its top (not shown). The nipple ring can then be threadingly secured to the baby bottle causing a compressive force to be exerted on flange **85** by the nipple ring and leading edge or rim of the baby bottle. Securing channel **87** engages with the annular ring on the lower surface of the nipple ring (not shown) providing a further locking and sealing mechanism.

During breast-feeding, a baby latches on to the areola region of a woman's breast. The present invention provides areola region **45** on nipple **10** for a baby to latch on to. Conventional nipples, including the nipple disclosed in U.S. Pat. No. 5,653,732, fail to provide a single, distinct area that simulates the areola region. In providing such a region, the present invention provides a nipple that simulates a woman's breast during breast-feeding and reduces the difficulties associated with transitioning between breast-feeding and bottle-feeding. Additionally, during breast-feeding, the areola region of a woman's breast is pulled by the sucking force, resulting in inward and outward movement in the baby's mouth. The present invention further provides upper portion **52** that is a flexible region that causes areola region **45** of nipple **10** to inwardly and outwardly move when a sucking force is applied. In allowing such motion, the present invention provides a nipple that further simulates a woman's breast during breast-feeding and reduces the difficulties associated with transitioning between breast-feeding and bottle-feeding.

The present invention having been thus described with particular reference to the preferred forms thereof, it will be obvious that various changes and modifications may be made therein without departing from the spirit and scope of the present invention as defined in the appended claims.

What is claimed is:

1. A nipple simulating an areola of a woman's breast comprising:

a stem having an orifice, a proximal end and a distal end; and

a base being connected to said proximal end of said stem, said base having an areola region and a bulbous region, said areola region being disposed between said proximal end of said stem and said bulbous region, said areola region having an outwardly convex shape,

5

wherein said areola region simulates the shape and function of the areola of the woman's breast, and wherein said areola region is substantially concentrically aligned with said bulbous region when viewed in a top view.

2. The nipple of claim 1, wherein said base has only two portions which are said areola region and said bulbous region.

3. The nipple of claim 2, wherein said stem is inwardly tapered toward said distal end.

4. The nipple of claim 1, wherein said proximal end of said stem has opposing sides with inwardly concave shapes when viewed in a front view.

5. The nipple of claim 4, wherein said opposing sides are smoothly concave when viewed in said front view.

6. The nipple of claim 1, wherein said stem is substantially concentrically aligned with said areola region and said bulbous region when viewed in said top view.

7. The nipple of claim 1, wherein said areola region has a circular shape when viewed in said top view.

8. The nipple of claim 1, wherein said convex shape of said areola region has a radius of curvature of about 5.0 mm to about 10.0 mm.

9. The nipple of claim 1, wherein said bulbous region has an outwardly convex shape.

10. The nipple of claim 9, wherein said convex shape of said bulbous region has a radius of curvature of about 10.0 mm to about 19.0 mm.

11. The nipple of claim 1, wherein said stem, said areola region and said bulbous region are integrally formed.

12. The nipple of claim 1, further comprising a securing structure.

13. The nipple of claim 5, wherein said securing structure is a flange extending outwardly from said bulbous region.

14. The nipple of claim 13, wherein said flange has an annular channel.

15. The nipple of claim 1, wherein said stem is elongated.

16. The nipple of claim 15, wherein said stem has a length of about 16.0 mm to about 26.0 mm.

17. The nipple of claim 1, wherein said bulbous region has a circular shape when viewed in said top view.

18. The nipple of claim 1, wherein said distal end of said stem has a curved apex.

19. A nipple simulating an areola of a woman's breast comprising:

a stem having an orifice, a proximal end and a distal end; and

a base being connected to said proximal end of said stem, said base having an areola region and a bulbous region, said areola region having a first wall thickness, said bulbous region having a second wall thickness and a third wall thickness,

wherein said areola region is positioned between said stem and said bulbous region,

wherein said areola region simulates the shape and function of the areola of the woman's breast,

wherein said third wall thickness is disposed in a portion of said bulbous region adjacent to said areola region, and

wherein said first and second wall thicknesses are greater than said third wall thickness.

20. The nipple of claim 19, wherein said areola region is substantially concentrically aligned with said bulbous region when viewed in a top view.

21. The nipple of claim 20, wherein said areola region and said bulbous region have circular shapes when viewed in said top view.

6

22. The nipple of claim 19, wherein said areola region has an outwardly convex shape.

23. The nipple of claim 22, wherein said convex shape of said areola region has a radius of curvature of about 5.0 mm to about 10.0 mm.

24. The nipple of claim 22, wherein said bulbous region has an outwardly convex shape.

25. The nipple of claim 24, wherein said convex shape of said bulbous region has a radius of curvature of about 10.0 mm to about 19.0 mm.

26. The nipple of claim 19, wherein said stem is substantially concentrically aligned with said base when viewed in a top view.

27. The nipple of claim 19, wherein said stem is inwardly tapered toward said distal end.

28. The nipple of claim 19, wherein said base has only two portions which are said areola region and said bulbous region.

29. The nipple of claim 19, wherein said proximal end of said stem has opposing sides with inwardly smooth concave shapes when viewed in a front view.

30. The nipple of claim 19, further comprising a flange extending outwardly from said bulbous region, wherein said flange has an annular channel formed therein.

31. The nipple of claim 19, wherein said stem is elongated.

32. The nipple of claim 19, wherein said first wall thickness is about 1.0 mm to about 1.4 mm, wherein said second wall thickness is about 1.3 mm to about 1.9 mm, and wherein said third wall thickness is about 0.63 mm to about 0.89 mm.

33. A nipple simulating an areola of a woman's breast comprising:

a stem having an orifice, a proximal end and a distal end;

an areola region being connected to said proximal end of said stem, said areola region having an outwardly convex shape;

a bulbous region having an outwardly convex shape and surrounding said areola region; and

an annular edge being positioned between said areola region and said bulbous region,

wherein said areola region is substantially concentrically aligned with said bulbous region when viewed in a top view, and

wherein said areola region simulates the shape and function of the areola of the woman's breast.

34. The nipple of claim 33, wherein said stem is inwardly tapered toward said distal end.

35. The nipple of claim 34, wherein said distal end of said stem has a curved apex.

36. The nipple of claim 33, wherein the nipple has only one edge which is said annular edge.

37. The nipple of claim 36, wherein said proximal end of said stem has opposing sides with inwardly smooth concave shapes when viewed in a front view.

38. The nipple of claim 33, wherein said bulbous region has a first wall thickness that decreases towards said edge.

39. The nipple of claim 38, wherein said areola region has a substantially uniform second wall thickness.

40. The nipple of claim 33, wherein said stem is substantially concentrically aligned with said areola region and said bulbous region when viewed in said top view.

41. The nipple of claim 40, wherein said areola region and said bulbous region have circular shapes when viewed in said top view.

42. The nipple of claim 33, wherein said convex shape of said areola region has a radius of curvature of about 5.0 mm

7

to about 10.0 mm, and wherein said convex shape of said bulbous region has a radius of curvature of about 10.0 mm to about 19.0 mm.

43. The nipple of claim 33, wherein said stem is elongated.

44. A nipple simulating an areola of a woman's breast comprising:

a stem having an orifice, a proximal end and a distal end; and

a base being connected to said proximal end of said stem, said base having an outer surface and an areola region, said outer surface being outwardly convex,

wherein said areola region has an annular shape and is raised from said outer surface of said base,

wherein said areola region is substantially concentrically aligned with said base when viewed in a top view, and wherein said areola region simulates the shape and function of the areola of the woman's breast.

45. The nipple of claim 44, wherein said stem is inwardly tapered toward said distal end.

46. The nipple of claim 44, wherein said base has only one raised portion which is said areola region.

47. The nipple of claim 44, wherein said areola region is disposed along said base in proximity to said proximal end of said stem.

48. The nipple of claim 44, wherein said base and said proximal end of said stem are connected to form an inwardly smooth concave surface.

49. The nipple of claim 44, wherein said base has a first wall thickness that decreases towards said areola region.

50. The nipple of claim 49, wherein said areola region has a substantially uniform second wall thickness.

51. The nipple of claim 44, wherein said stem is substantially concentrically aligned with said areola region when viewed in said top view.

52. The nipple of claim 51, wherein said areola region has a circular shape when viewed in said top view.

53. The nipple of claim 44, wherein said areola region has an outer surface with an outwardly convex shape, and wherein said convex shape has a radius of curvature of about 5.0 mm to about 10.0 mm.

54. The nipple of claim 44, wherein said stem is elongated.

55. The nipple of claim 44, wherein said areola region is defined by a smooth upper annular end and a sharp lower annular edge.

8

56. The nipple of claim 55, wherein said base has only one edge which is said lower annular edge.

57. A nipple comprising:

a stem having an orifice, a proximal end and a distal end; an areola region being connected to said proximal end of said stem, said areola region having an outwardly convex shape; and

a bulbous region having an outwardly convex shape and surrounding said areola region,

wherein said stem and said areola region are joined along a smoothly inwardly concave surface, and

wherein said areola region and said bulbous region are joined along an annular edge.

58. The nipple of claim 58, wherein said areola region is substantially concentrically aligned with said bulbous region when viewed in a top view.

59. The nipple of claim 57, wherein said stem is inwardly tapered toward said distal end.

60. The nipple of claim 57, wherein said distal end of said stem has a curved apex.

61. A The nipple of claim 57, wherein said bulbous region has a first wall thickness that decreases towards said areola region.

62. The nipple of claim 61, wherein said areola region has a substantially uniform second wall thickness.

63. The nipple of claim 57, wherein said stem is substantially concentrically aligned with said areola region and said bulbous region when viewed in a top view.

64. The nipple of claim 57, wherein said convex shape of said areola region has a radius of curvature of about 5.0 mm to about 10.0 mm.

65. The nipple of claim 64, wherein said convex shape of said bulbous region has a radius of curvature of about 10.0 mm to about 19.0 mm.

66. The nipple of claim 57, wherein said stem is elongated.

67. The nipple of claim 57, wherein the nipple has only one edge which is said annular edge.

68. The nipple of claim 58, wherein said areola region and said bulbous region have circular shapes when viewed in said top view.

* * * * *