US005711041A

United States Patent [19]

Chen

[11] Patent Number: 5,711,041

[45] Date of Patent: Jan. 27, 1998

[54] **INFLATABLE AIR MATTRESS WITH INTERNAL PUMP**

[75] Inventor: **John Chen**, Sharon, Mass.

[73] Assignee: **CSA, Inc.**, South Easton, Mass.

[21] Appl. No.: **622,755**

[22] Filed: **Mar. 27, 1996**

[51] **Int. Cl.**[6] **A47C 27/08**

[52] **U.S. Cl.** **5/708**; 5/712

[58] **Field of Search** 5/706, 708, 711, 5/712

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,042,941	7/1962	Marcus	5/708
3,069,494	12/1962	Pinkwater	5/708
3,133,696	5/1964	Mirando	5/708 X
3,155,991	11/1964	Dunham	5/708
3,780,388	12/1973	Thomas et al.	5/711
4,930,174	6/1990	Hunter	5/708
5,437,068	8/1995	Fisher	5/712

Primary Examiner—Michael F. Trettel
Attorney, Agent, or Firm—Herbert L. Bello

[57] **ABSTRACT**

Disclosed is an air mattress apparatus. The apparatus includes a pump contained within an inflatable chamber. The pump is in fluid communication with the inflatable chamber via intake and exhaust ports. One-way valves positioned on the intake and exhaust ports of the pump control the flow of air from the pump to the inflatable chamber of the air mattress. The pump contains a resilient, closed-cell foam pump material. The mattress is inflated by repeatedly compressing the pump material and then permitting it to expand and fill with air.

20 Claims, 3 Drawing Sheets

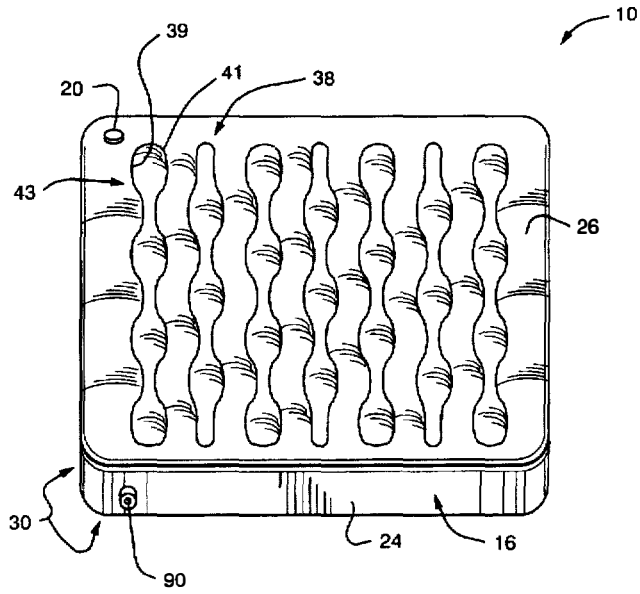

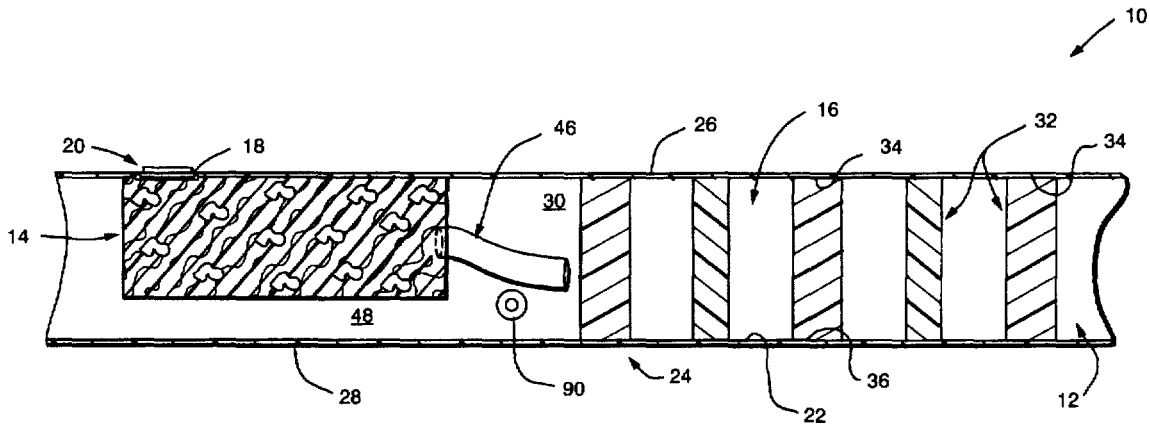

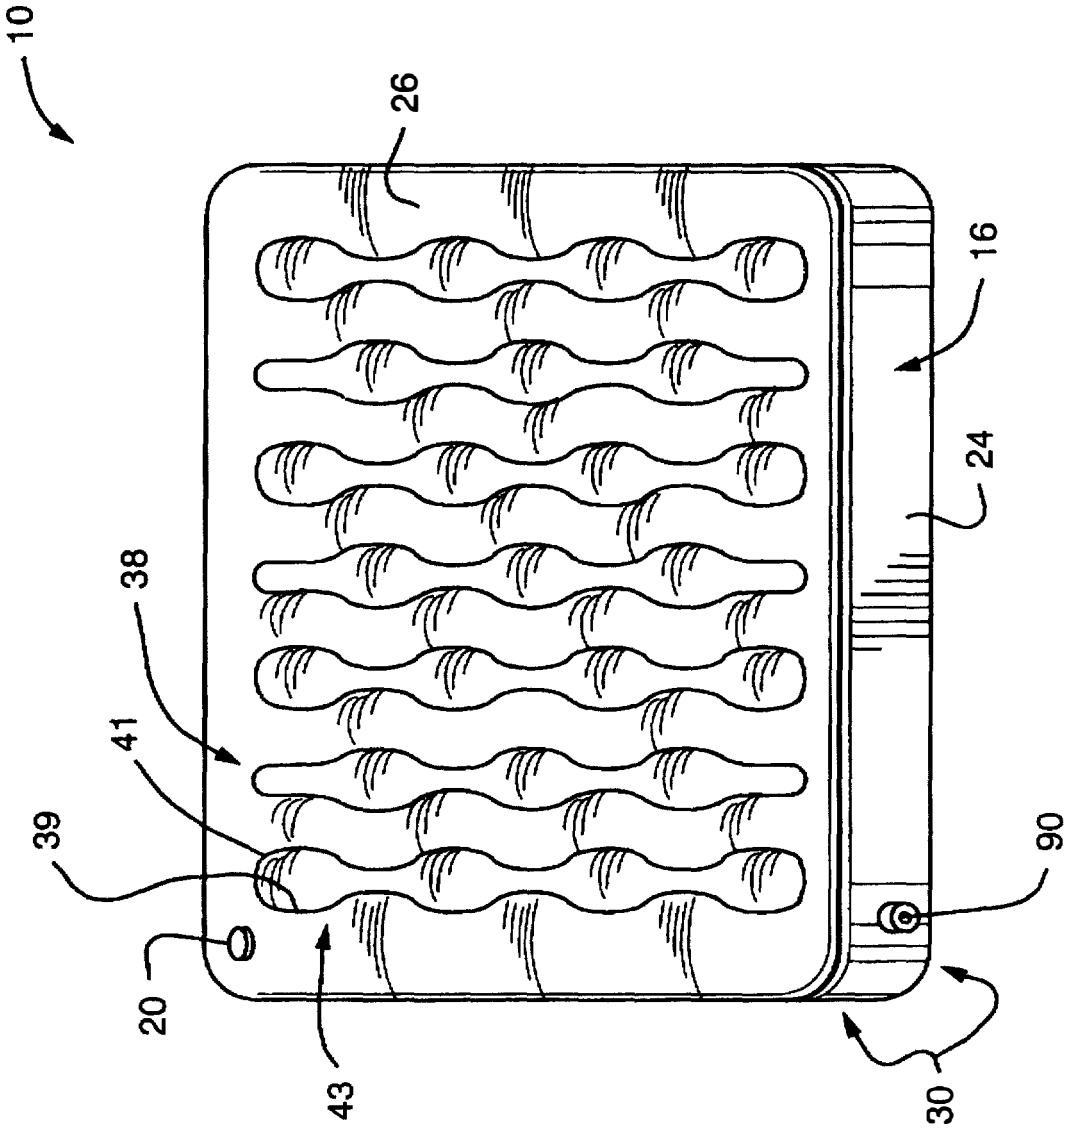

FIG. 1

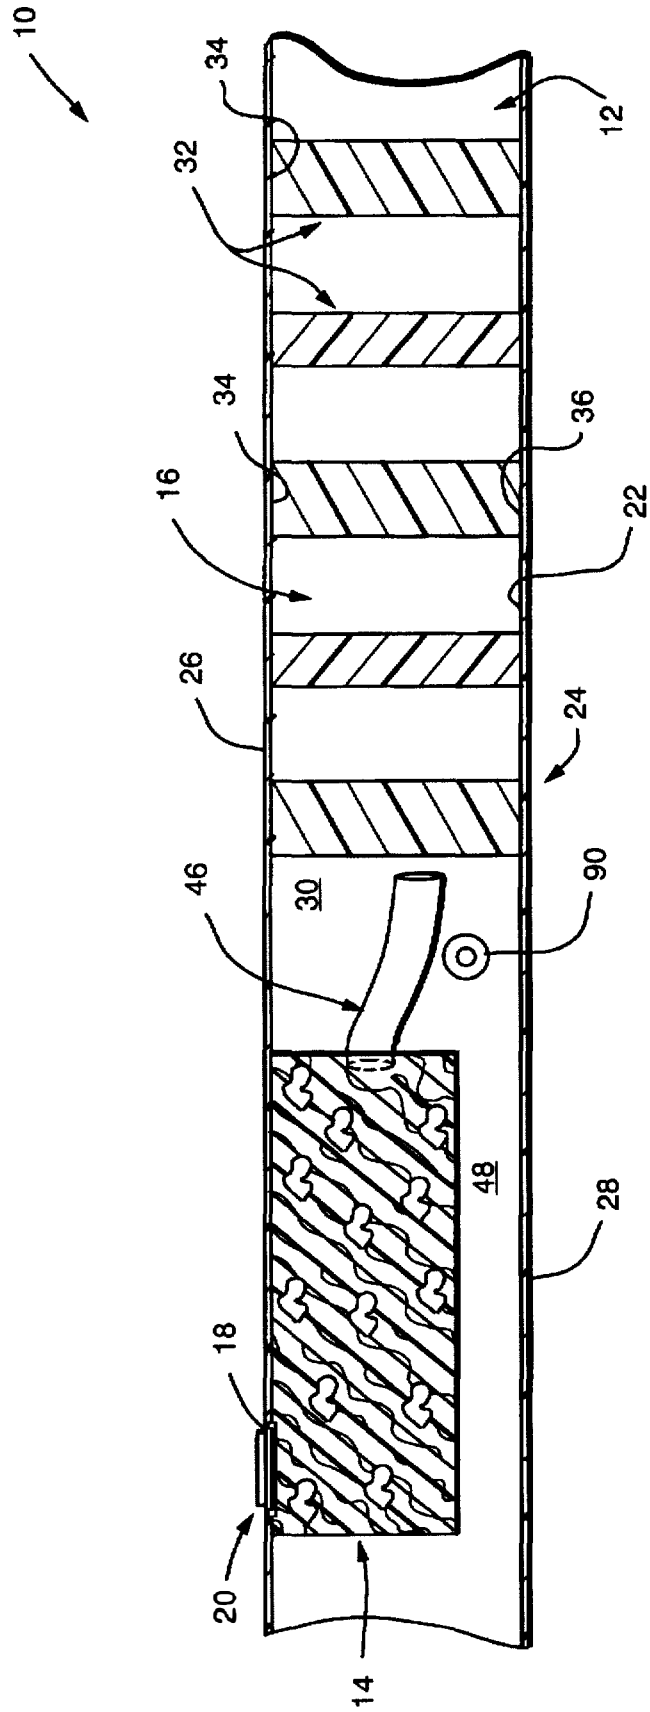

FIG. 2

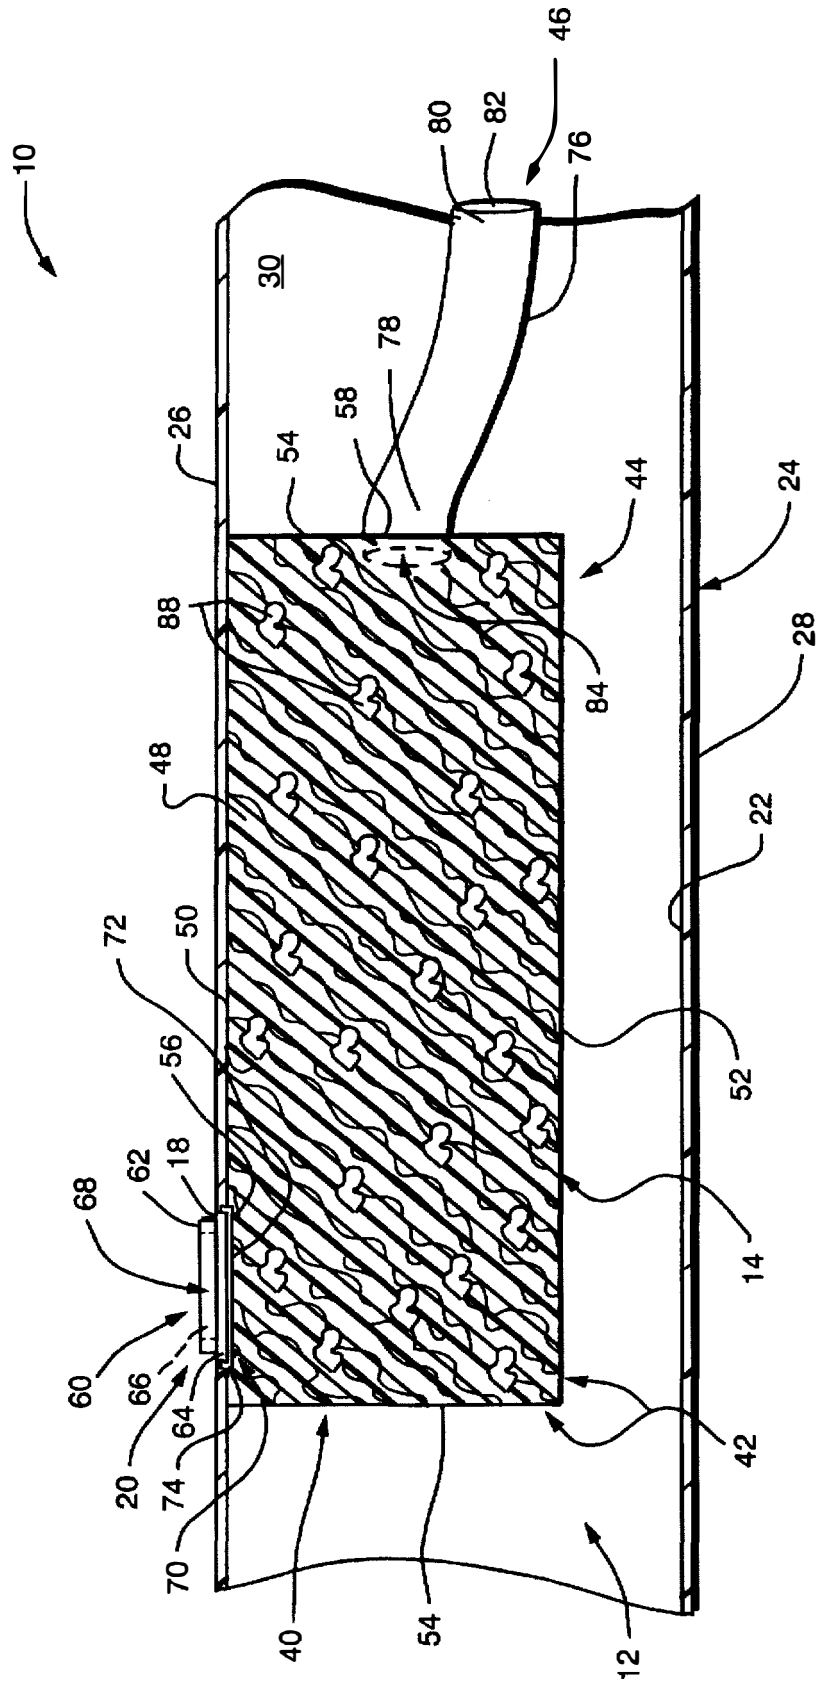
10
46
80
82
76
30
78
58
54
26
44
24
88
84
28
48
22
72
50
52
56
14
62
18
68
60
66
64
20
74
70
42
40
54
12

FIG. 3

INFLATABLE AIR MATTRESS WITH INTERNAL PUMP

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to air mattresses. More particularly, the present invention is directed to an air mattress having self-contained, internally mounted pump system.

2. Description of the Prior Art

Air mattresses are increasingly used in a wide variety of applications. For example, in their various configurations air mattress are currently used in fields of endeavor as diverse as recreation and health care. Fostering this expanded use are, among other things, the durability, low manufacturing cost, and easy use of air mattresses.

To meet the needs of an expanding market, air mattresses of various configurations have been designed and developed. The most common air mattresses include a sealed enclosure having a single aperture used for inflation and deflation. Modifications to this basic design include, for example, texturing of exposed surfaces, and segmentation or compartmentalization of the air containing envelope. Further, a diversity of polygonal designs and cross-sectional configurations have been developed in order to provide air mattresses having configurations useful for specific applications, including, for example, back braces and cushioning assemblies.

Although air mattresses have met with favorable economic success, those currently available in the marketplace suffer from a significant operational limitation. In particular, none of the air mattresses currently available incorporate a pump system as an integral component. Accordingly, users must purchase separate pumping apparatuses in order to use available mattresses. This requirement increases the overall cost of the air mattress and, thus, limits marketability. In addition, owners must always carry the pump in order to inflate the air mattress.

A need has arisen for an air mattress apparatus which does not suffer from the foregoing disadvantages and limitations.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved air mattress apparatus.

Another object of the invention is to provide an air mattress apparatus that can be easily and efficiently inflated.

A further object of the invention is to provide an air mattress apparatus which includes a self-contained pumping system.

A still further object of the present invention is to provide an air mattress apparatus of improved structural integrity for greater comfort and durability.

It is still another object of the present invention to provide an air mattress apparatus having a plurality of internal ribs that are disposed in complementary undulating patterns.

The air mattress of the invention generally comprises an inflatable chamber and an internally mounted pump. Typically, the pump is contained within the inflatable chamber. Incorporation of the pump in the inflatable chamber forms a self-contained apparatus that is easily inflated prior to use.

The inflatable chamber typically is formed from a set of walls, for example, a top wall, a bottom wall, and a series of sidewalls. The walls of the inflatable chamber are joined together, by welding, for example, such that their inner surfaces form a sealable interior chamber. During use, the outer surfaces of the walls are exposed to ambient environmental conditions. A plurality of undulating ribs can be secured in position, by welding, for example, within the inflatable chamber in order to augment the structural integrity of the air mattress during use. The walls of the inflatable chamber and ribs are typically formed from a substantially non-porous, flexible material.

As noted above, disposed within the inflatable chamber of the air mattress is the pump. The pump generally includes a pump housing defined by a set of walls composed of a flexible material. Typically, the depth of the pump housing is substantially equivalent to or sightly less than the height of the sidewalls of the inflatable chamber. If desired, a portion of the walls forming the inflatable chamber and the walls forming the pump housing can be a common wall. The walls of the pump housing cooperate to form a pump chamber. Like the walls of the inflatable chamber, the walls of the pump are formed from a substantially non-porous, flexible material.

A resilient, compressible pumping material is contained within the pump chamber, the depth of the pumping material is substantially equivalent to the height of the pump chamber. In one embodiment, the pumping material is a high density, closed cell foam that can be easily compressed by the application of a force. Once the force is removed, the foam returns to its original size and shape.

The pump housing includes an intake port and an exhaust port through which air flows from the outside of the air mattress to the inflatable interior chamber. More particularly, the intake port provides a fluid communication between the outside of the air mattress and the pump chamber. The exhaust port provides a fluid communication between the pump chamber and the inflatable chamber. Structurally, the intake port defines a channel between the outside of the air mattress and the pump chamber while the exhaust port defines a one-way flow channel between the pump chamber and the inflatable chamber.

The flow of air through the exhaust port is typically controlled by a one-way valve. The flow of air through the intake port is controlled by a through port or valve and a stopper or one-way valve. In operation, the valve on the intake port regulates the flow of air between the outside of the inflatable chamber and the pump chamber. The one-way valve on the exhaust port permits air to flow from the pump housing into the inflatable chamber and prevents air from flowing from the inflatable chamber into the pump chamber. When the intake and exhaust valves are opened air can move through their respective ports; and when the valves are closed, the flow of air is blocked through these ports.

To commence inflation of the air mattress of the invention, the intake port is opened and the pumping material is in its expanded state and full of air. Next, the intake port is closed and a force is applied to the pump housing to compress the pumping material. Compression of the pumping material forces the air in the pumping material to flow through the exhaust port into the inflatable chamber. Next, the force is removed from the pumping material and the intake port is opened. The pumping material expands and draws in air as it expands. Concurrent with this expanding action, the valve on the exhaust port closes so as to foreclose the backflow of air into the pump chamber from the inflatable chamber of the mattress. The pumping material continues to draw in outside air until it returns to its fully expanded state. The pump housing is continuously cycled

through the above-stated compression and inflation steps until the inflatable chamber is fully expanded. Upon achievement of this result, the intake port can, if desired, be sealed with a removable stopper, plug or cap.

After the air mattress has been used as desired, it can be deflated and stored for later use. Deflation of the air mattress can be achieved by opening of a release valve that communicates with the inflatable chamber and the outside air.

Other general and specific objects of the invention will in part be obvious and will in part appear hereinafter.

The invention accordingly comprises the method and apparatus embodying steps, features of construction, combinations of elements, and arrangements of parts adapted to effect such steps, as exemplified in the following detailed disclosure, the scope of the invention is indicated in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a fuller understanding of the nature and objects of the invention, reference should be made to the following detailed description and the accompanying drawings, in which:

FIG. **1** is a perspective view of the air mattress of the invention;

FIG. **2** is a side, cut-away view of the air mattress of the invention; and,

FIG. **3** is a side, cut-away view, providing a close-up view, of the pump system incorporated in the air mattress of the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to the drawings, particularly FIG. **1**, there is illustrated an air mattress **10** embodying the present invention. The air mattress **10** generally includes an inflatable chamber **12** and a pump **14**. Although a rectangular configuration is depicted in the several FIGURES, those skilled-in-the-art will appreciate that the air mattress **10** can be sized and shaped as desired. Further, the configuration of the inflatable chamber **12** can be selected as desired for a given application. The cross-sectional configuration of the inflatable chamber **12** can also be altered as desired in order to provide the desired level of support for a given usage.

Referring to FIGS. **1** and **2**, the inflatable chamber **12** is an interior cavity contained within the air mattress **10**. A series of sidewalls **16** form the inflatable chamber **12**. At least one of the sidewalls **16** includes an aperture **18** configured to receive a portion of the intake port **20** of the pump **14**.

Each of the sidewalls **16** have an inner surface **22** and an outer surface **24**. In the preferred embodiment of the invention as depicted in the FIGS. **1** and **2**, the sidewalls **16** include a top wall **26**, a bottom wall **28**, and a series of sidewalls **30**. All of the walls **26**, **28**, and **30** are joined together by electrostatic welding, for example, in order to form the sealable enclosure of the inflatable chamber **12**. More particularly, the walls **26**, **28**, and **30** are welded together such that their inner surfaces **22** form the inflatable chamber **12**. Once joined, the outer surfaces **24** of the sidewalls **16** are exposed to ambient environmental conditions. The sidewalls **16** of the inflatable chamber **12** are formed of a substantially non-porous, flexible material. In the preferred embodiment of the invention as depicted in the several FIGURES, the flexible material used to form the sidewalls **16** is a dimensionally stable polymer, for example, a plastic such as PVC. Those skilled-in-the-art will appreciate, however, that virtually any material can be used to form the sidewalls **16** providing its permeability characteristics are sufficient to contain a gas, for example, air.

If desired, a plurality of ribs **32** can be secured in position within the inflatable chamber **12**. In operation, the ribs **32** augment the structural integrity of the air mattress **10**. The ribs **32** are disposed substantially perpendicular to top wall **26** and bottom wall **28**. Typically, the ribs **32** are secured in place by electrostatical welding their upper edge **34** and lower edge **36** to the inner surfaces **22** of the top wall **26** and bottom wall **28**, respectively. In a preferred embodiment of the invention, the ribs **32** are welded in place so as to form an undulating pattern **38** on the top wall **26** and bottom wall **28** of the air mattress **10**. To achieve this result, complementary undulating forms are used to lay-out the rib pattern **38** during production of the air mattress **10**. Preferably, a flexible material, for example, a dimensionally stable polymer such as plastic or PVC, is used to form the ribs **32**. Of course, virtually any material can be used to form the ribs **32** providing it has the desired level of structural integrity once the air mattress **10** is inflated.

In the preferred embodiment of the invention, the rib pattern **38** consists of a first sine-wave-like pattern **39** and a second sine-wave-like pattern **41**. The patterns **39** and **41** are paired together to form a sub-pattern **43**. More particularly, sub-pattern **43** is produced by pairing patterns **39** and **41** together such that they are 180 degrees out of phase. As many repetitions of sub-pattern **43** as necessary are utilized in order to provide the requisite mechanical strength to the air mattress **10**. Preferably, succeeding sub-patterns **43** are positioned such that each sub-pattern **43** is 180 degrees out of phase vis-a-vis each preceding sub-pattern **43**.

As shown in FIGS. **2** and **3**, disposed within the inflatable chamber **12** of the air mattress **10** is the pump **14**. The pump **14** generally includes a pump housing **40** defined by a series of walls **42**. The pump housing **40** contains a pump chamber **44**. If desired, a portion of those sidewalls **16** forming the inflatable chamber **12** and the walls **42** forming the pump housing **40** can be configured as a common wall. Extending from the walls **42** are an intake port **20** and an exhaust port **46**. Contained within the pump chamber **44** is a pump material **48**. Typically, the walls **42** are sized and shaped such that the depth of the pump housing **40** is substantially equivalent to the depth of the sidewalls **16** of the air mattress **10** when the air mattress **10** is fully inflated.

As noted above, walls **42** cooperate to form a pump housing **40**. In the preferred embodiment of the invention as depicted in the several FIGURES, the walls **42** include a top wall **50**, a bottom wall **52**, and a set of sidewalls **54**. All of the walls **50**, **52**, and **54** are joined together, that is, welded, in order to form the desired sealable enclosure, i.e., the pump chamber **44**. The top wall **50**, bottom wall **52**, or sidewalls **54** typically include an aperture **56**. As described in detail below, the aperture **56** provides an egress for the intake port **20** of the pump **14**. One of the sidewalls **54** typically also includes an aperture **58** which provides access for an exhaust port **46** of the pump **14**. As discussed in greater detail below, the ports **20** and **46** provide channels which guide the flow of air between the outside of the air mattress **10** and the inflatable chamber **12**. Like the sidewalls **16** of the inflatable chamber **12**, the walls **50**, **52**, and **54** of the pump **14** are formed from a substantially non-porous, flexible material, for example, PVC or plastic.

In the preferred embodiment of the invention as shown in FIGS. **2** and **3**, the intake port **20** is an annular, axially

extending, tubular member **60** having a first end **62** and a second end **64**. An interior bore **66** of the member **60** defines a channel **68** through which air can pass. The first end **62** of the tubular member **60** of the intake port **20** is connected to the aperture **18** in a sidewall **16** of the inflatable chamber **12**. The second end **64** of the tubular member **60** of the intake port **20** connects to the aperture **56** of the pump housing **40**. In operation, via the channel **68** created by bore **66**, intake port **20** provides a fluid communication for the flow of air from the environment outside of the air mattress **10** to the pump chamber **44**.

In one embodiment of the invention, the intake port **20** remains open at all times. In an alternative embodiment of the invention as shown in FIGS. **2** and **3**, the flow of air through the intake port **20** can be regulated by a one-way valve **70**. When used, the valve **70** typically is a flange **72** anchored along one edge **74** to the appropriate wall **42** of the pump housing **40**. The valve **70** has an open and a closed position. In operation, the valve **70** on the intake port **20** permits air to flow from the environment outside of the air mattress **10** into the pump chamber **44**. When the valve **70** is opened, air can move through the bore **66** and into the pump chamber **44**. When the valve **70** is closed, communication between the outside of the air mattress **10** and the pump chamber **44** is blocked. The valve **70** typically is manufactured from a material similar to that used to form the sidewalls **16** of the inflatable chamber **12**, i.e., a substantially non-porous, flexible material such as PVC or plastic.

The exhaust port **46** also has an annular configuration. More particularly, the exhaust port **46** is an axially extending member **76** having a first end **78** and a second end **80**. An interior bore **82** of the member **76** defines a channel **84** through which air can pass. The first end **78** of the member **76** of the exhaust port **46** connects to the aperture **58** in one of the sidewalls **54**. The second end **80** of the member **76** of the exhaust port **46** extends into the inflatable chamber **12**. In operation, via bore **82**, exhaust port **46** provides a fluid communication for the flow of air from the pump chamber **44** to the inflatable chamber **12**.

In the preferred embodiment of the invention as depicted in FIGS. **2** and **3**, the flow of air through the exhaust port **46** is regulated using the tubular member **76** as a one-way valve. More particularly, when air is forced into the exhaust port **46** air pressure causes the bore **82** of the member **76** to expand. This expansion permits the passage of air from the pump chamber **44** into the inflatable chamber **12** to occur. When the flow of air ceases, the member **76** collapses under its own weight, closing the bore **82**, and preventing the further passage of air from the inflatable chamber **12** into the pump chamber **44**. This action also forecloses deflation of the inflatable chamber **12**. In order for the member **76** to function in this manner, those skilled-in-the-art will appreciate that it must be manufactured from a strong, but pliable, material. In the preferred embodiment of the invention, the member **76** typically is manufactured from a material similar to that used to form the sidewalls **16** of the inflatable chamber **12**, i.e., a substantially non-porous, flexible material such as PVC or plastic.

In an alternative embodiment of the invention (not shown), the flow of air through the exhaust port **46** can be regulated by a one-way flapper valve. When used, the one-way flapper valve typically is a flange anchored along one edge to a sidewall **42** of the pump housing **40**. This valve has an open and a closed position. When the valve is opened air can move through the bore **82** of the member **76** and into the inflatable chamber **12**. When the valve is closed, communication between the pump chamber **44** and inflatable chamber **12** is blocked. That is, when air attempts to flow from the inflatable chamber **12**, the flapper valve closes and prevents air from flowing out of the inflatable chamber. The valve typically is manufactured from a material similar to that used to form the sidewalls **16** of the inflatable chamber **12**, i.e., a substantially non-porous, flexible material such as PVC or plastic.

Contained within the pump chamber **44** is a porous, resilient pumping material **48**. The pumping material **48** preferably is sized and shaped such that it occupies substantially all of the space within the pump chamber **44**. Accordingly, the height of the pumping material **48** is substantially equivalent to the height of the sidewalls **16** of the air mattress **10**. Operationally, the resiliency of the pump material **48** imparts a similar resiliency to the pump **14**. That is, the pump material **48** forces the pump **14** to operate as a self-actuating bellows. This feature permits the cycling of compression and inflation necessary for the pump **14** to function as an inflationary device.

Typically, the pumping material **48** is a high density, closed-cell foam. More particularly, the pumping material **48** has a cross-sectional configuration displaying a fine collection of pockets **88**. Operationally, when the pumping material **48** is compressed, and then permitted to expand, air is captured in the pockets **88**. Later compression of the pumping material **48**, and thus its pockets **88**, forces the air contained in the pockets **88** to be released and channeled as directed by the valves **70** and **76** of the intake port **20** and exhaust port **46**, respectively.

In the preferred embodiment of the invention, to commence inflation of the air mattress of the invention **10**, the intake port **20** is opened and the pumping material **48** is permitted to expand until it is full of air. A force is then applied to the pump housing **40**. Generally, the force is applied by stepping on the pump housing **40**. Application of this force compresses both the pump housing **40** and the pumping material **48** contained therein. As the pumping material **48** is compressed, air trapped in the pumping material **48** is forced through the exhaust port **46** into the inflatable chamber **12**. After the pumping material **48** is fully compressed, the force is removed from the pump housing **40** and intake port **20** is opened. This action permits the pumping material **48** to return to its original size. Concurrent with this action, the valving action of the member **76** of the exhaust port **46** closes the bore **82** so as to foreclose the backflow of air from the inflatable chamber **12** of the mattress of the invention **10**. Air is then permitted to flow into the pump housing **40** and hence pump material **48** through the intake port **20** until the pump chamber **44** and pumping material **48** are fully expanded.

Once the pump housing **40** and pumping material **48** are fully expanded, the pump housing **40** is again compressed, i.e., stepped on. This compression action causes the valve **70** positioned on the intake port **20** to close and the bore **82** of the member **76** to expand, i.e., open. Further, as a result of the compression of the pumping material **48**, that air contained in the pockets **88** of the pumping material **48** is forced out of the pumping material **48** and into the inflatable chamber **12** of the air mattress **10**. This airflow is again directed by, respectively, the closure of the intake port valve **70** and opening of the bore **82** of the member **76**. When full compression is achieved, the bore **82** of member **76** once again closes so as to foreclose any deflation of the air mattress of the invention **10**.

The pump housing **40** is continuously cycled through the above-stated compression and inflation steps until the inflat-

able chamber **12** is fully inflated. Upon achievement of this result, the intake port **20** can, if desired, be sealed so as to avoid deflation of the air mattress **10**.

After the air mattress **10** has been used as desired, it can be deflated and stored for later use. Deflation of the air mattress **10** can be achieved by concurrently opening of the intake port **20** and exhaust port **46**. Alternatively, opening of an independent release valve **90** will release the air contained in the interior inflatable chamber **12**.

It will thus be seen that the invention efficiently attains the objects set forth above, among those made apparent from the preceding description.

It will be understood that changes may be made in the above construction and in the foregoing sequences of operation without departing from the scope of the invention. It is accordingly intended that all matter contained in the above description or shown in the accompanying drawings be interpreted as illustrative rather than in a limiting sense.

It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention as described herein, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

Having described the invention, what is claimed as new and secured by Letters Patent is:

1. An inflatable apparatus comprising:

(a) at least one inflatable chamber defined by a first set of wall means, said first set of wall means formed from a substantially non-porous, flexible material, said first set of wall means having an inner surface and an outer surface, an inflatable chamber being formed by said inner surface, said outer surface exposed to an ambient environment;

(b) a plurality of internally disposed ribs, a portion of each said ribs attached to said inner surface of said first set of walls means, said ribs being disposed in rows in a sine-wave-like pattern, at least a portion of said ribs being disposed 180 degrees out of phase with one another;

(c) a pump means disposed within said inflatable chamber, said pump means including a pump housing defined by a second set of wall means, said second set of wall means formed from a substantially non-porous, flexible material, a portion of said first set of wall means and said second set of wall means being common walls, an interior pump chamber formed by said pump housing;

(d) compressible pumping material, said pumping material being disposed within said pump chamber of said pump means;

(e) an intake port means providing fluid communication between said outer surface of said first set of wall means and said pump chamber, said intake port means defining a channel between said outer surface of said first set of wall means and said pump chamber; and,

(f) a one-way exhaust port means providing fluid communication from said pump chamber to said inflatable chamber.

2. The apparatus of claim **1** wherein a portion of said first set of wall means and said second set of wall means are common walls.

3. The apparatus of claim **1** wherein said porous, resilient and compressible material is a high-density closed-cell foam.

4. The apparatus of claim **1** wherein said intake port means includes a one-way valve means, said valve means having a first open position and a second closed position.

5. The apparatus of claim **4** wherein said valve means is configured such that when said valve means is in said first open position said intake port means provides a fluid communication between the outside of said inflatable housing and said pump chamber and when said valve means is in said second closed position communication is blocked between the outside of said inflatable housing and said pump chamber.

6. The apparatus of claim **1** wherein said exhaust port means includes a one-way valve means, said one-way valve means having a first open position and a second closed position.

7. The apparatus of claim **6** wherein said one-way valve means is configured such that when said one-way valve means is in said first open position said exhaust port means provides a fluid communication from said pump chamber to said inflatable chamber and when said valve means is in said second closed position communication is blocked between said pump chamber and said inflatable chamber.

8. An inflatable air mattress apparatus, said apparatus comprising:

(a) an inflatable chamber defined by a top wall means, sidewall means, and a bottom wall means, all of said wall means being formed from a substantially non-porous, flexible material, all of said wall means having an inner surface and an outer surface, said inner surfaces of said wall means defining said inflatable chamber, said inflatable chamber containing a plurality of support rib means, said outer surface being exposed to ambient environmental conditions;

(b) a plurality of internally disposed ribs, each of said ribs attached to said inner surface of said top wall and said inner surface of said bottom wall, said ribs disposed in rows, said ribs being disposed in a sine-wave-like pattern, at least a portion of said rows of said ribs being disposed 180 degrees out of phase with one another;

(c) a pump means disposed within said inflatable chamber, said pump means including a pump housing defined by housing wall means, said housing wall means formed from a substantially non-porous, flexible material, an interior pump chamber formed by said pump housing;

(d) a porous, resilient and compressible pumping material, said pumping material being disposed within said pump chamber of said pump means;

(e) an intake port means providing fluid communication between said outer surface of said first set of wall means and said pump chamber, said intake port means defining a channel between said outer surface of said wall means and said pump chamber; and,

(f) a one-way exhaust port means providing fluid communication between said pump chamber to said inflatable chamber.

9. The apparatus of claim **8** wherein a portion of one of said top wall means, bottom wall means, or sidewall means and said pump housing wall means are common walls.

10. The apparatus of claim **8** wherein said porous, resilient and compressible material is a high density, closed-cell foam.

11. The apparatus of claim **8** wherein said intake port means includes a one-way valve means, said valve means having a first open position and a second closed position.

12. The apparatus of claim **11** wherein said valve means is configured such that when said valve means is in said first open position said intake port means provides a fluid communication between said outside of said inflatable chamber

and said pump chamber and when said valve means is in said second closed position communication is blocked between said outside of said inflatable chamber and said pump housing.

13. The apparatus of claim **8** wherein said exhaust port means includes a one-way valve means, said one-way valve means having a first open position and a second closed position.

14. The apparatus of claim **13** wherein said valve means is configured such that said valve means is movable between said first open position and said second closed position, when said valve means is in said first open position said exhaust port means provides a fluid communication from said pump chamber to said inflatable chamber and when said valve means is in said second closed position communication is blocked between said pump chamber and said inflatable chamber.

15. In combination with an inflatable mattress apparatus having an inflatable chamber, wherein the improvement comprises:

(a) a pump means disposed within said inflatable chamber of said mattress, said pump means including a pump housing, said pump housing including an intake port means and a one-way exhaust port means, said pump housing being formed from a substantially non-porous, flexible material, said pump housing defining a pump chamber, said intake port means defining a channel between an outer surface of said air mattress and said pump chamber, said exhaust port means defining a channel between said pump chamber and said inflatable chamber of said mattress;

(b) an expandable and compressible porous material disposed with said pump chamber of said pump means; and

(c) a plurality of ribs, each said rib disposed in a sine-wave-like pattern, said ribs positioned within said inflatable chamber of said mattress in a plurality of row pairs, each said row pair having sine-wave-like patterns that are phase shifted from one another, each said row pair displaced from adjacent row pairs by 180 degrees.

16. The apparatus of claim **15** wherein a portion of said pump housing and said air mattress have common walls.

17. The apparatus of claim **15** wherein said porous, expandable and compressible material is a closed-cell foam.

18. The apparatus of claim **15** wherein said intake port means includes a one-way valve means, said valve means having a first open position and a second closed position.

19. The apparatus of claim **15** wherein said exhaust port means includes a one-way valve means, said valve means having a first open position and a second closed position.

20. An inflatable air mattress apparatus, said apparatus comprising:

(a) an inflatable chamber defined by a first set of wall means, said first set of walls means including a top wall, a bottom wall and sidewalls, said first set of wall means formed from a substantially non-porous, flexible material, each of said top wall, said bottom wall and said sidewalls having an inner surface and an outer surface, an inflatable chamber being formed by said inner surfaces, said outer surfaces exposed to an ambient environment; and

(b) a plurality of internally disposed ribs, said ribs attached to an inner surface of said top wall and said inner surface of said bottom wall, said ribs disposed in alternating rows of first and second patterns, said first pattern having a pair of sine-wave-like pattern that are disposed 180 degrees out of phase with one another and a second pattern having a pair of sine-wave-like pattern that are disposed 180 degrees out of phase with one another, adjacent one of said first and second patterns being 180 degrees out of phase with one another, said 180 degrees out of phase sine-wave-like patterns of said first and second patterns providing structural integrity and support to the inflatable air mattress.

* * * * *