



US 20020191684A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2002/0191684 A1****Min et al.**(43) **Pub. Date: Dec. 19, 2002**(54) **SYSTEM AND METHOD FOR PERFORMING RANGING IN A CABLE MODEM SYSTEM****Related U.S. Application Data**


(60) Provisional application No. 60/296,482, filed on Jun. 8, 2001.

(75) Inventors: **Jonathan S. Min**, Buena Park, CA (US); **Fang Lu**, Rowland Heights, CA (US)**Publication Classification**(51) **Int. Cl.⁷** **H04B 1/38**(52) **U.S. Cl.** **375/222; 375/229**

Correspondence Address:

STERNE, KESSLER, GOLDSTEIN & FOX PLLC
1100 NEW YORK AVENUE, N.W., SUITE 600
WASHINGTON, DC 20005-3934 (US)(57) **ABSTRACT**

The present invention provides a system and method for performing ranging operations in a cable modem system. In accordance with embodiments of the present invention, transmission times, transmission power levels, transmission carrier frequencies, and pre-equalization parameters are adjusted to provide for robust operation of the cable modem system. More particularly, iterative processing steps are used to provide coefficient ordering, scaling, and aligning between the multiple cable modems and the cable modem termination system present in a cable modem system.

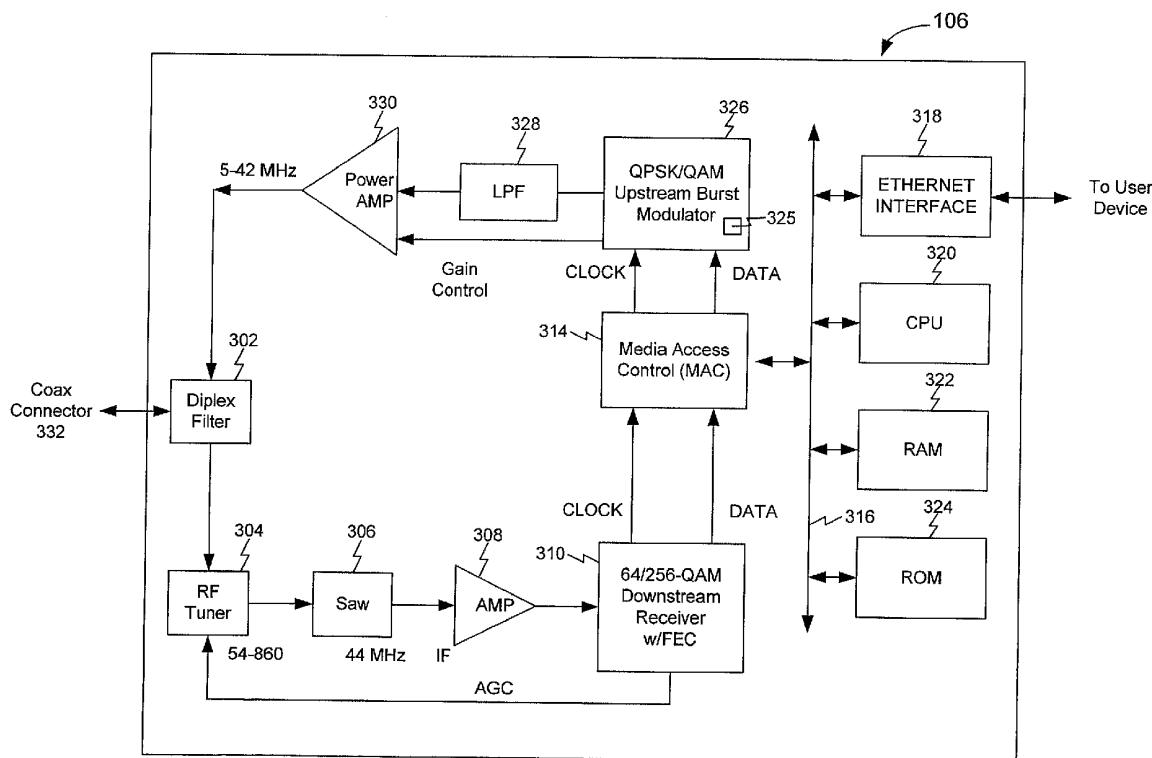(73) Assignee: **Broadcom Corporation**(21) Appl. No.: **10/164,367**(22) Filed: **Jun. 10, 2002**

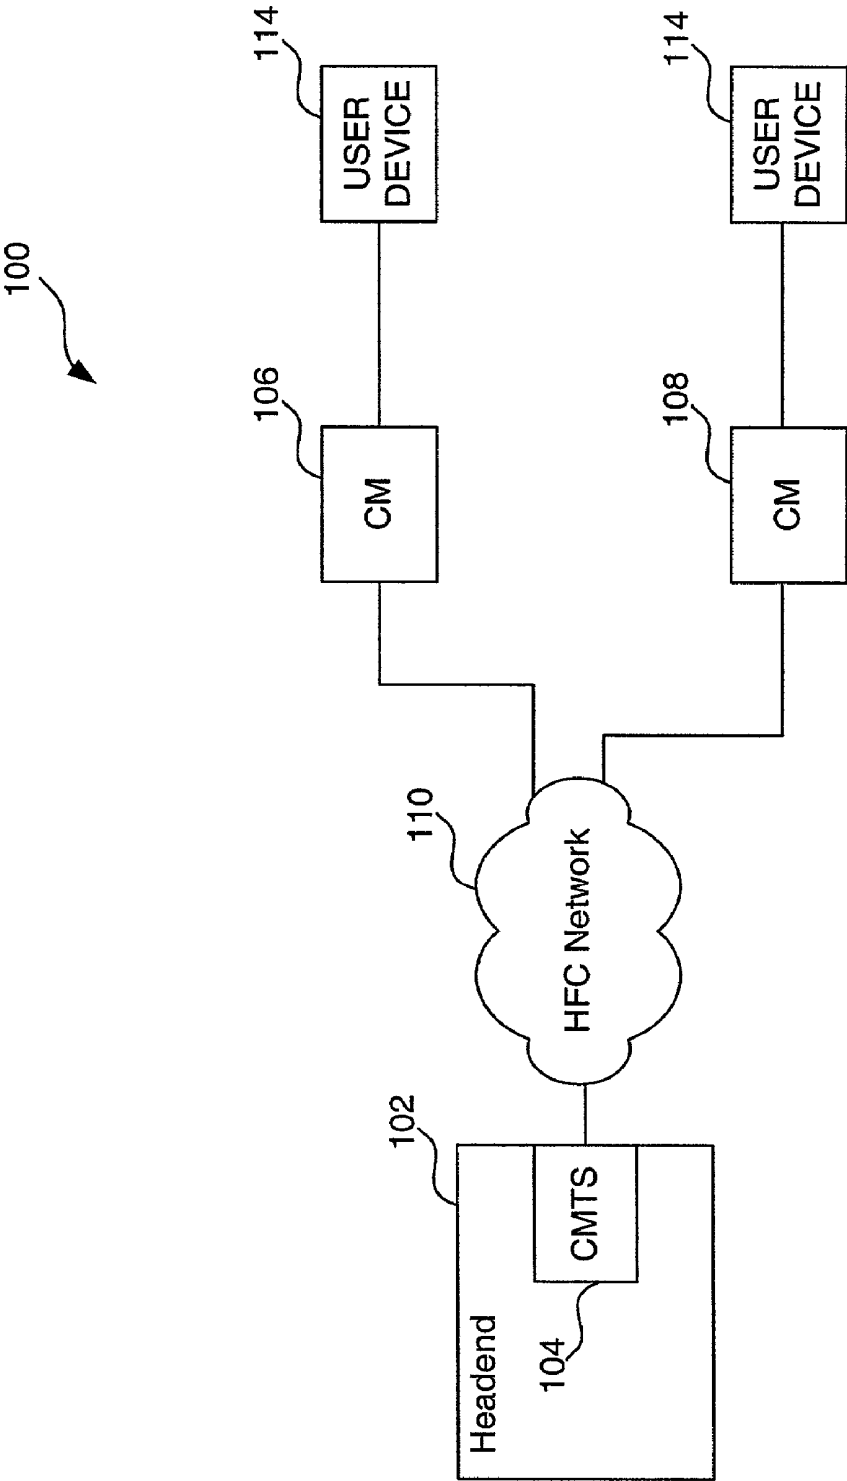


FIG. 1

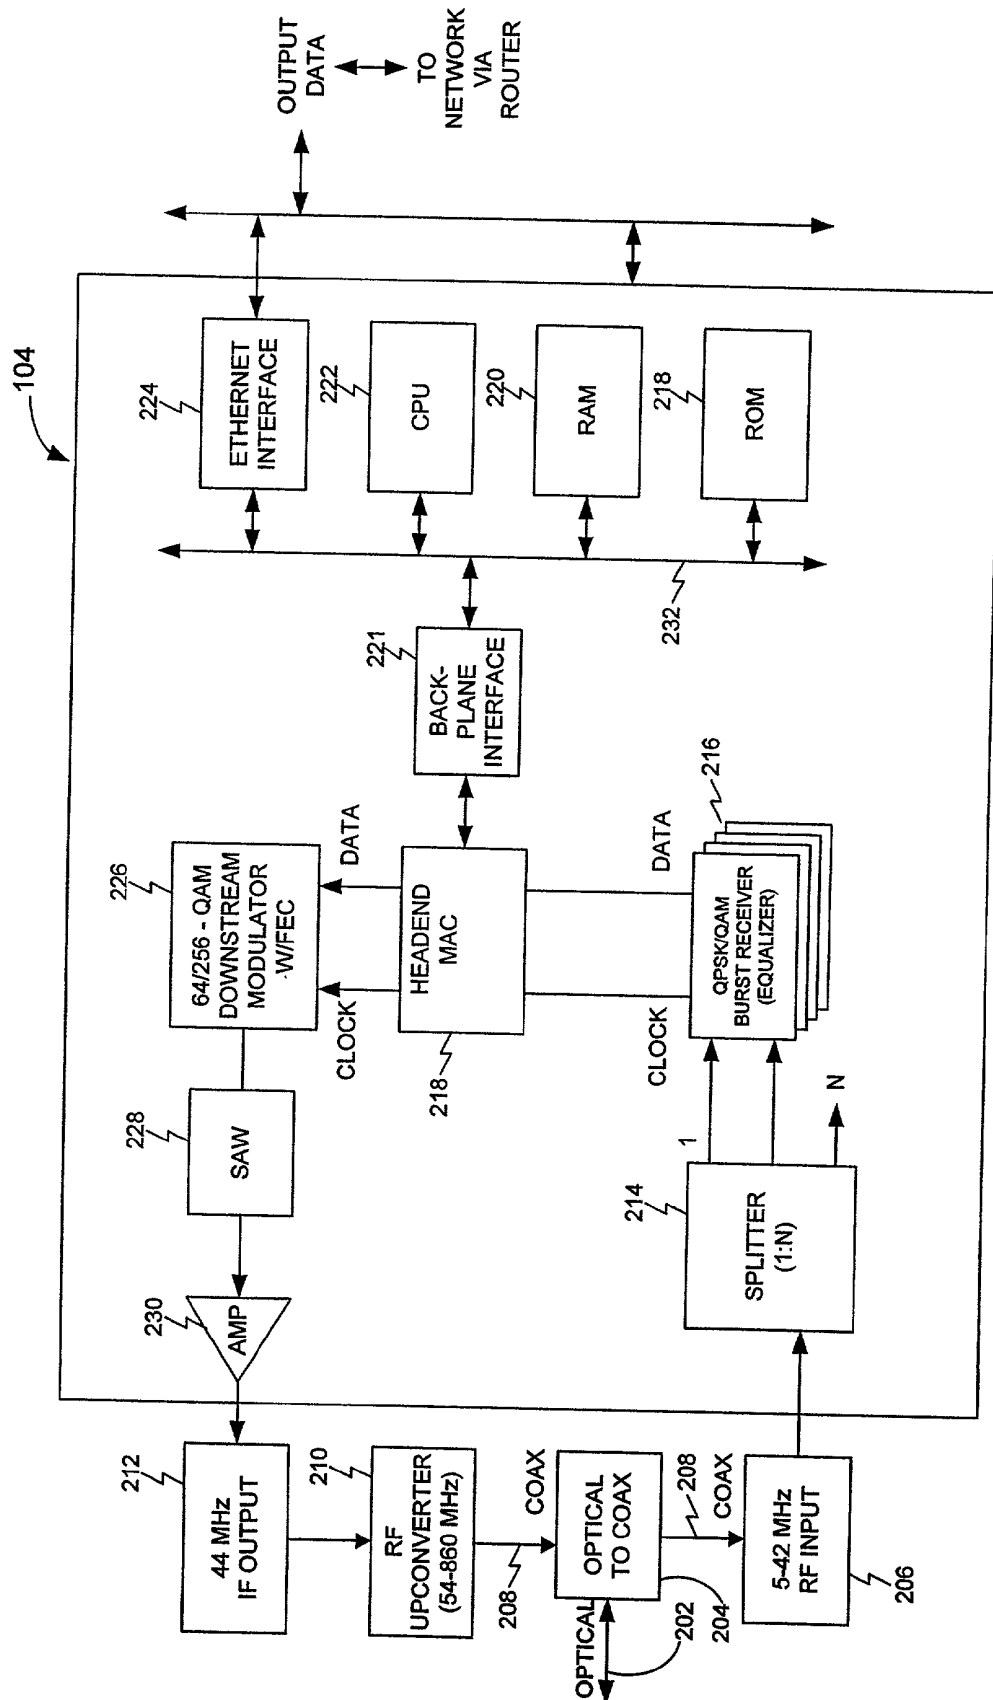


FIG. 2

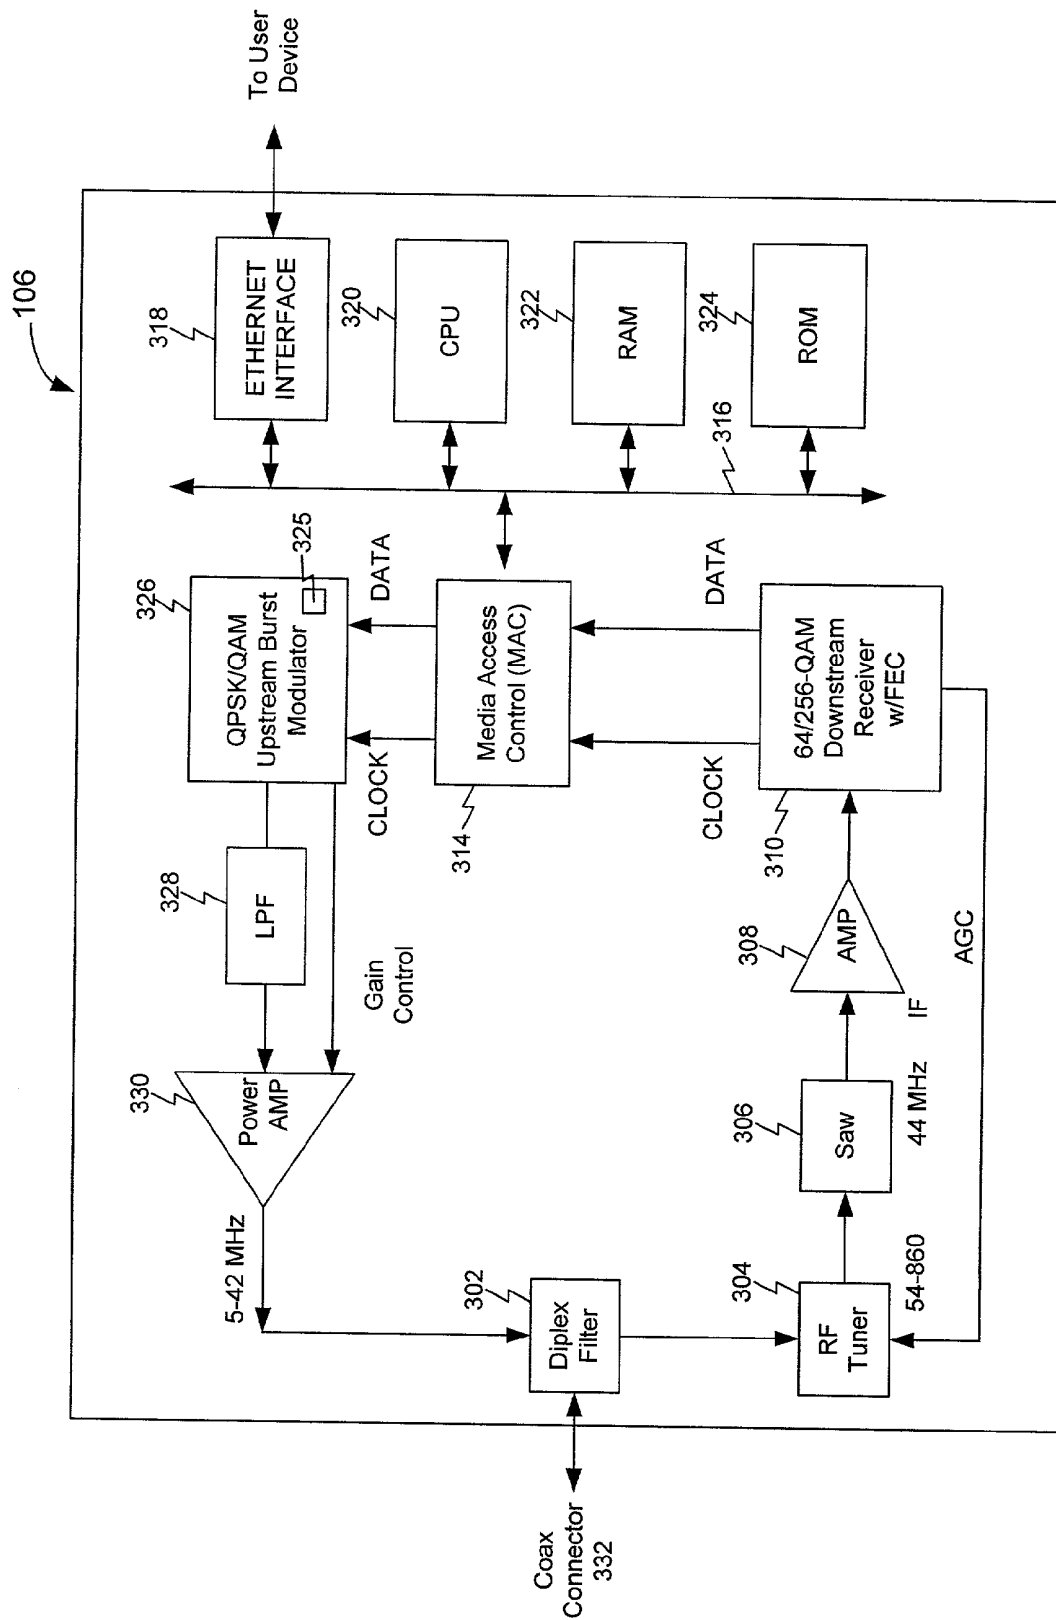


FIG. 3

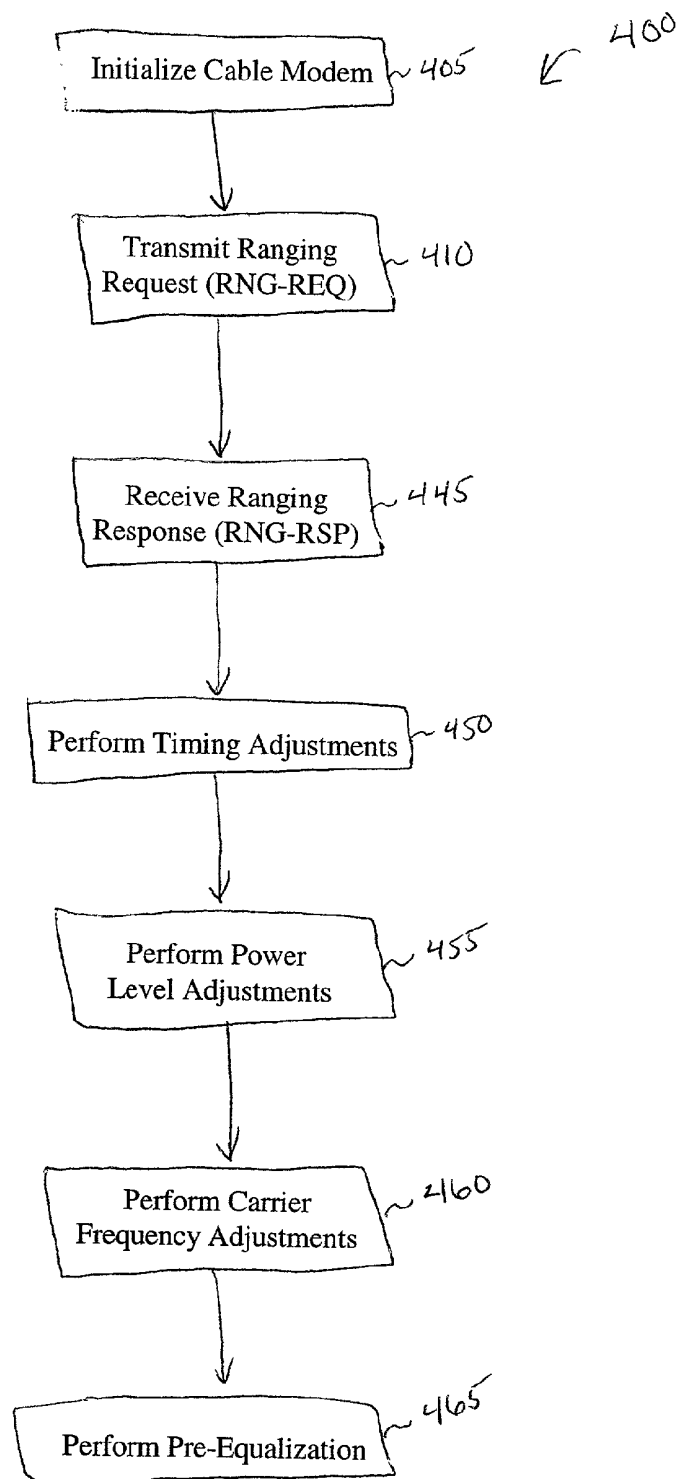


FIG. 4A

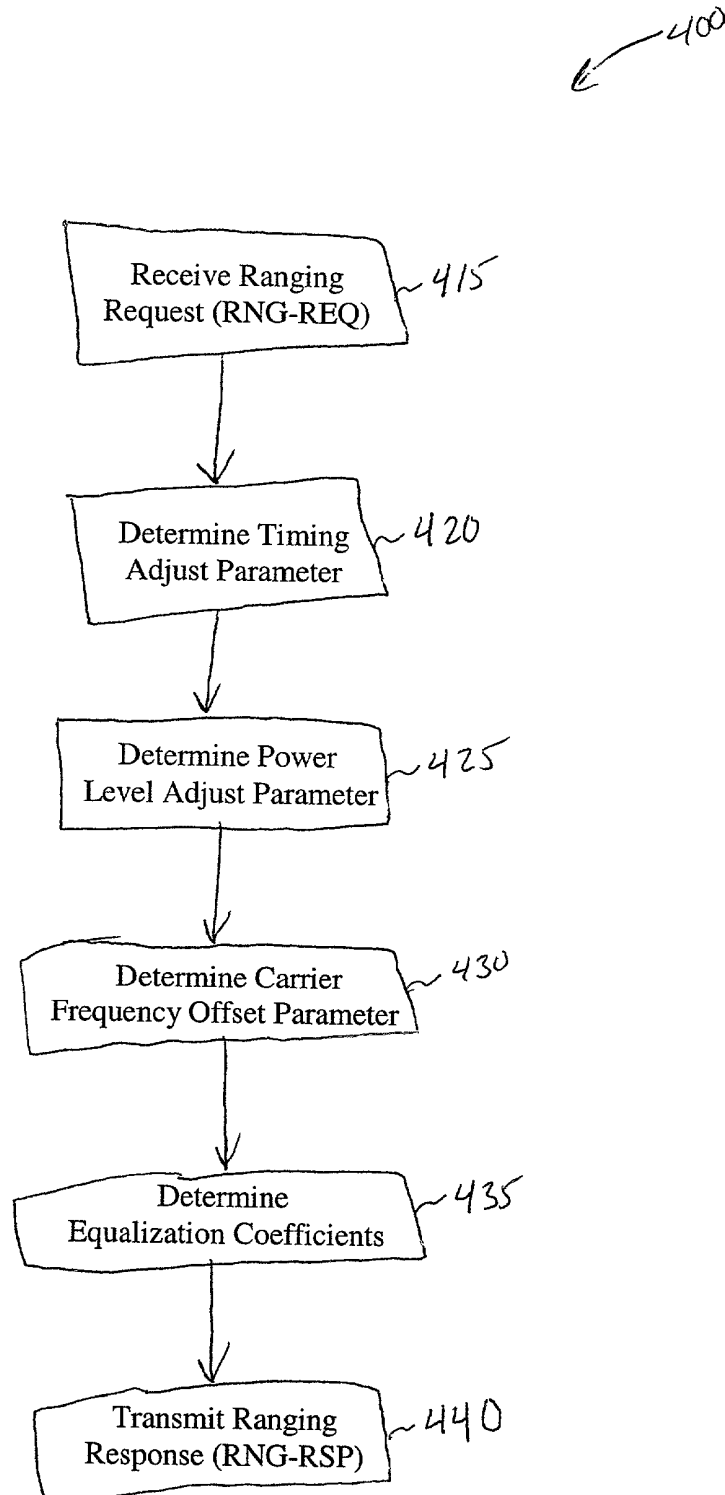


FIG. 4B

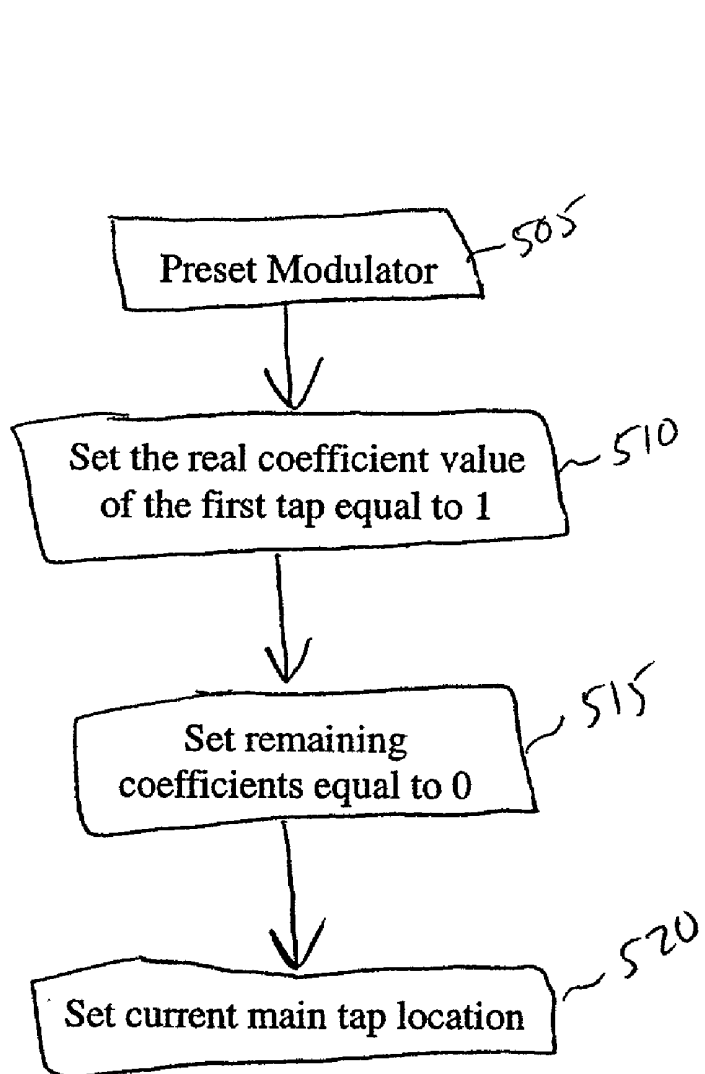


FIG. 5

FIG. 6A

Name	Type (1 byte)	Length (1 byte)	Value (Variable Length)
Timing Adjust	1	4	TX timing offset adjustment (signed 32-bit, units of (6.25 microsec/64))
Power Level Adjust	2	1	TX Power offset adjustment (signed 8-bit, 1/4-dB units)
Offset Frequency Adjust	3	2	TX frequency offset adjustment (signed 16-bit, Hz units)
Transmit Equalization Adjust	4	n	TX equalization data - see details below
Ranging Status	5	1	1 = continue, 2 = abort, 3 = success
Downstream frequency override	6	4	Center frequency of new downstream channel in Hz
Upstream channel ID override	7	1	Identifier of the new upstream channel.
Reserved	8-255	n	Reserved for future use

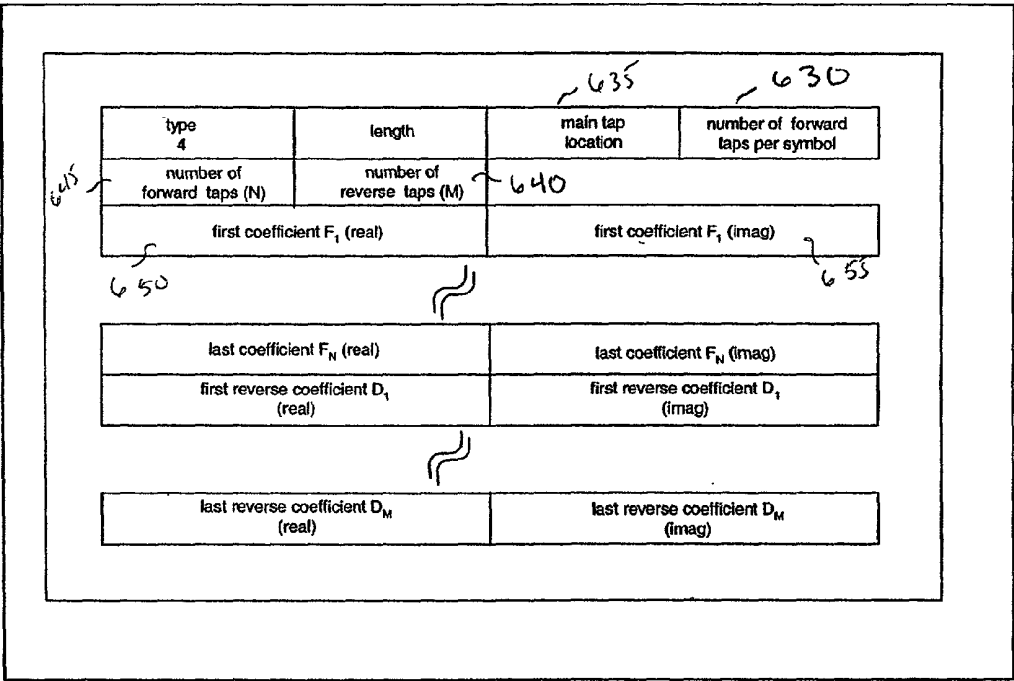


FIG. 6B

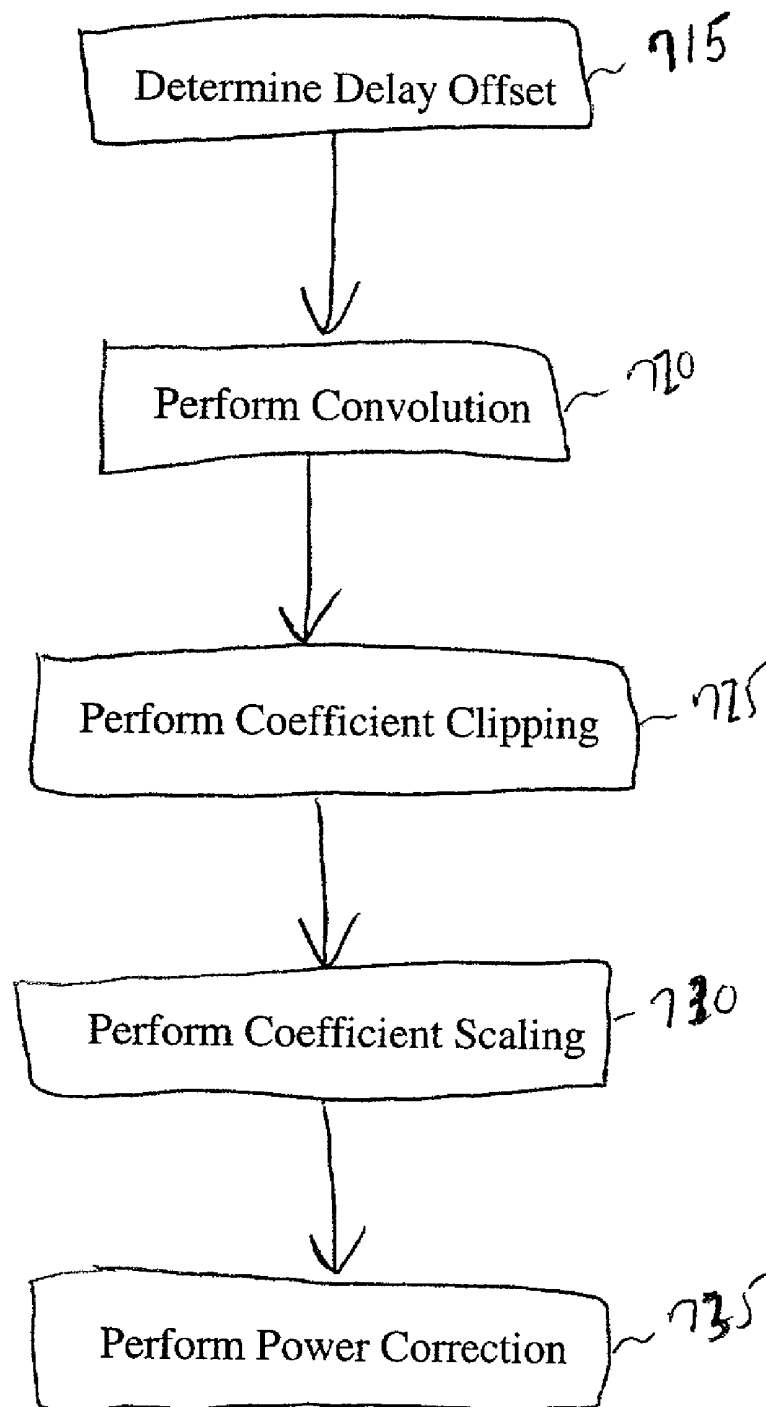


FIG. 7

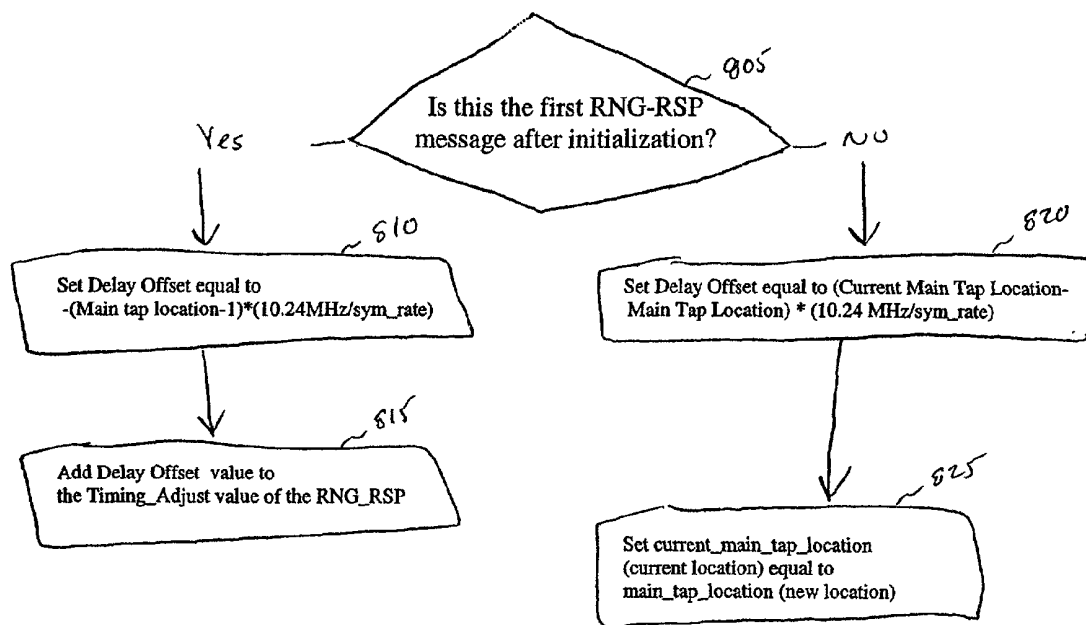


FIG. 8

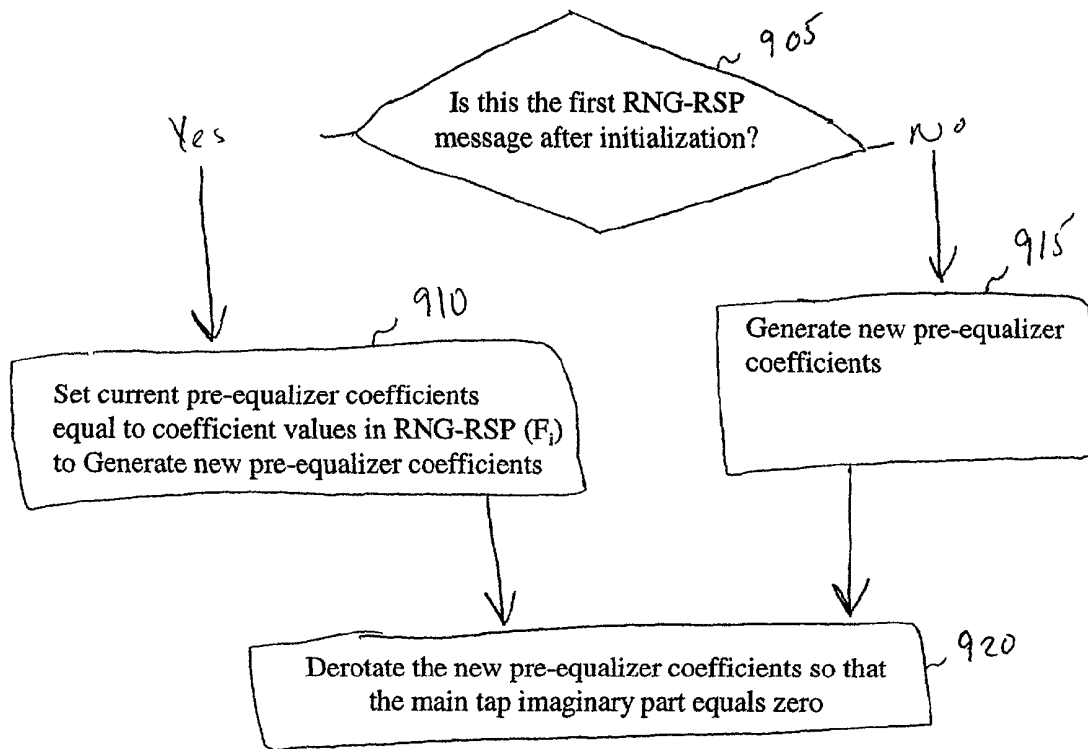


FIG. 9

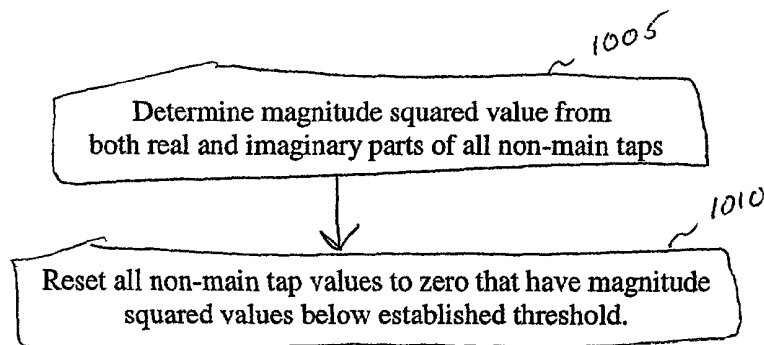


FIG. 10

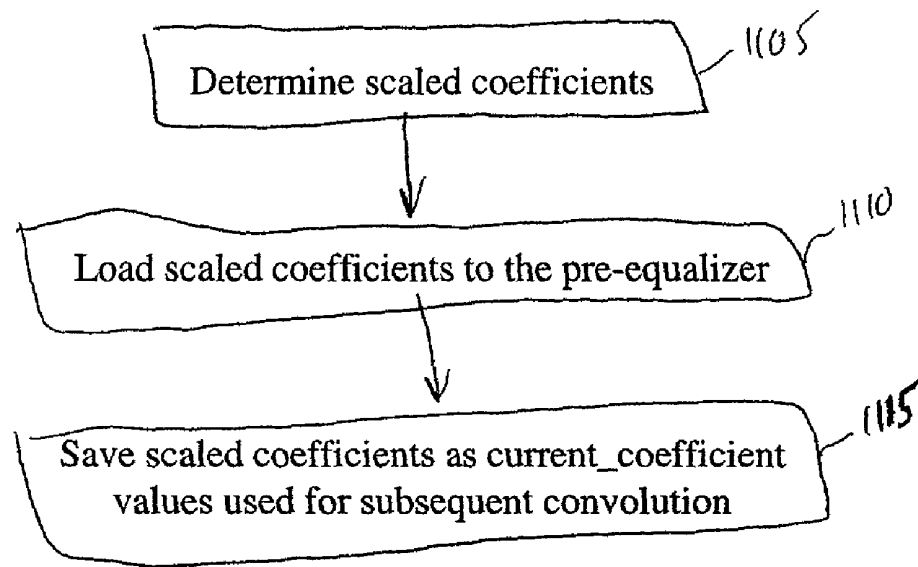


FIG. 11

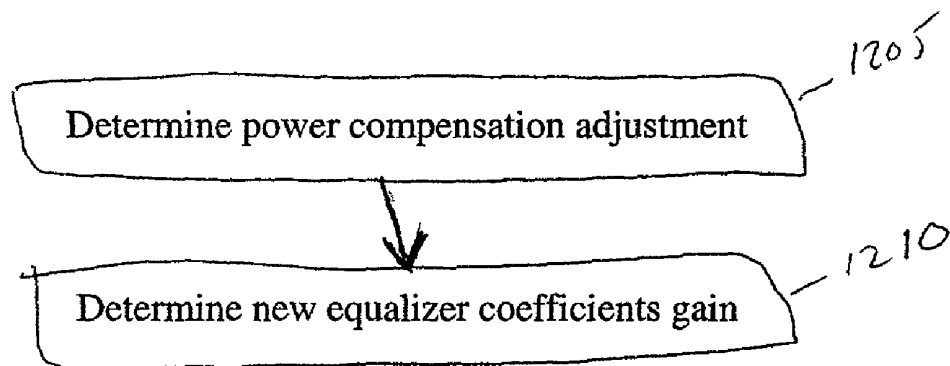


FIG. 12

SYSTEM AND METHOD FOR PERFORMING RANGING IN A CABLE MODEM SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 60/296,482 filed Jun. 8, 2001 and incorporated herein by reference in its entirety.

[0002] This application is related to the following U.S. Patent Applications:

[0003] U.S. patent application Ser. No. 09/710,238 filed Nov. 9, 2000; and

[0004] U.S. patent application Ser. No. 09/780,179 filed Feb. 9, 2001.

BACKGROUND OF THE INVENTION

[0005] 1. Field of the Invention

[0006] The present invention is generally related to communication systems.

[0007] More particularly, the present invention is related to cable modem systems and methods for ranging cable modems.

[0008] 2. Related Art

[0009] In conventional cable modem systems, a hybrid fiber-coaxial (HFC) network provides a point-to-multipoint topology for supporting data communication between a cable modem termination system (CMTS) at the cable headend and multiple cable modems (CM) at the customer premises. In such systems, information is broadcast downstream from the CMTS to the cable modems as a continuous transmitted signal in accordance with a time division multiplexing (TDM) technique. In contrast, information is transmitted upstream from each of the cable modems to the CMTS as short burst signals in accordance with a time division multiple access (TDMA) technique. The upstream transmission of data from the cable modems is managed by the CMTS, which allots to each cable modem specific slots of time within which to transfer data.

[0010] Conventional cable modem systems utilize DOCSIS-compliant equipment and protocols to carry out the transfer of data packets between multiple cable modems and a CMTS. The term DOCSIS (Data Over Cable System Interface Specification) refers to a group of specifications published by CableLabs that define industry standards for cable headend and cable modem equipment. The most recent version of DOCSIS is DOCSIS 2.0. In part, DOCSIS sets forth requirements and objectives for various aspects of cable modem systems including ranging, operations support systems, management, data interfaces, as well as network layer, data link layer, and physical layer transport for data over cable systems.

[0011] Ranging is the process used to adjust transmit levels and time offsets of individual cable modems in order to make sure the data coming from the different modems line up in the right time slots and are received at the same power level at the CMTS. Ensuring that data arrives at the same power level is essential for detecting collisions. If two Cable Modems transmit at the same time, but one is weaker than the other one, the CMTS will only hear the strong signal and

assume everything is okay. However, if the two signals have the same strength, the signal will garble and the CMTS will know a collision occurred. Carrier frequency adjustments are also made during the ranging process. Adjustments to the carrier frequency are made to ensure that the CM and CMTS are exchanging transmissions at an agreed upon frequency.

[0012] Pre-equalization is a process for reducing distortion over the transmission path between the CM and the CMTS and is a part of the above described ranging process. Pre-equalization is achieved using pre-equalization coefficients. The DOCSIS specification provides guidelines for how the pre-equalization coefficients are utilized; however, it does not stipulate as to how the coefficient values are derived.

[0013] It has been observed that cable modem systems have not been operated according to their greatest potential. Accordingly, what is desired is a system and method for optimizing the ranging process. In this way robust operation between the multiple cable modems and the cable modem termination system in the HFC network can be achieved.

BRIEF SUMMARY OF THE INVENTION

[0014] The present invention provides a system and method for performing ranging operations in a cable modem system. In accordance with embodiments of the present invention, a ranging request burst is transmitted from a cable modem (CM) to a cable modem termination system (CMTS). The ranging request is comprised of a long preamble portion and a payload portion which includes MAC headers. The characteristics of received power, timing, and carrier frequency offsets of the ranging request are estimated by the CMTS from the received ranging request burst waveform. The CMTS also estimates the combined effects of the cable modem's pre-equalizer and the Hybrid-Fiber-Cable channel distortions. This estimation results in the generation of equalizer coefficients. The resulting equalizer coefficients are then sent back to the originating CM so that the CM can update its pre-equalizer coefficients.

[0015] In response to transmitting the ranging request, the cable modem receives a ranging response. The ranging response is comprised of a plurality of ranging parameters including an upstream communications parameter, a timing adjust parameter, a power level adjust parameter, a carrier frequency offset parameter, and a plurality of equalization parameters. The equalization parameters include the generated ranging response equalizer coefficients.

[0016] Subsequent to receipt of the ranging response at the CM, the current pre-equalizer coefficients for the main tap and non-main taps are set equal to the ranging response equalizer coefficients to generate new pre-equalizer coefficients. In the case where additional ranging responses are received, the ranging response equalizer coefficients are used to convolve the current pre-equalizer coefficients for the main tap and non-main taps according to the algebraic equation EQ1. EQ1 is used to generate new pre-equalizer coefficients. The new pre-equalizer coefficients are then derotated so that an imaginary part of the main tap is equal to zero.

[0017] Next, each non-main tap having a determined magnitude squared value below a specified threshold is identified. For each identified non-main tap, the new pre-equalizer coefficient for a real part and an imaginary part is set equal to zero.

[0018] Scaled coefficients are then generated using a second algebraic equation, such as for example EQ2A or EQ2B which are also described in greater detail below. EQ2A can be used for absolute sum scaling, while EQ2B can be utilized for Root-Mean-Squared (RMS) scaling. Finally, adjustments to the transmit power of the cable modem are made using an equalizer coefficient gain change value. The equalizer coefficient gain change value is determined from a current equalizer coefficient gain value and a new equalizer coefficient gain value in accordance with equations EQ3 and EQ4.

BRIEF DESCRIPTION OF THE DRAWINGS/FIGURES

[0019] The accompanying drawings, which are incorporated herein and form part of the specification, illustrate the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the pertinent art to make and use the invention. In the drawings, like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number identifies the drawing in which the reference number first appears.

[0020] FIG. 1 is a high level block diagram of a cable modem system in accordance with embodiments of the present invention.

[0021] FIG. 2 is a schematic block diagram of a cable modem termination system (CMTS) in accordance with embodiments of the present invention.

[0022] FIG. 3 is a schematic block diagram of a cable modem in accordance with embodiments of the present invention.

[0023] FIGS. 4A and 4B are flowcharts of a method for performing ranging in a cable modem system according to embodiments of the present invention.

[0024] FIG. 5 is a flowchart of a method for initializing a cable modem according to embodiments of the present invention.

[0025] FIGS. 6A and 6B illustrate ranging response encoding in accordance with embodiments of the present invention.

[0026] FIG. 7 is a flowchart of a method for performing pre-equalization during ranging of a cable modem according to embodiments of the present invention.

[0027] FIG. 8 is a flowchart of a method for calculating delay offsets during ranging of a cable modem according to embodiments of the present invention.

[0028] FIG. 9 is a flowchart of a method for performing convolution during ranging of a cable modem according to embodiments of the present invention.

[0029] FIG. 10 is a flowchart of a method for performing coefficient clipping during ranging of a cable modem according to embodiments of the present invention.

[0030] FIG. 11 is a flowchart a method for performing coefficient scaling during ranging of a cable modem according to embodiments of the present invention.

[0031] FIG. 12 is a flowchart of a method for performing power corrections during ranging of a cable modem according to embodiments of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Table of Contents

[0032] A. Cable Modem System in Accordance with Embodiments of the Present Invention

[0033] B. Example Cable Modem System Components in Accordance with Embodiments of the Present Invention

[0034] C. Ranging Cable Modems In A Cable Modem System

[0035] 1. Example Initialization Method in Accordance with Embodiments of the Present Invention

[0036] 2. Example Ranging Request and Example Ranging Response in Accordance with Embodiments of the Present Invention

[0037] 3. Timing Adjustment in Accordance with Embodiments of the Present Invention

[0038] 4. Power Adjustment in Accordance with Embodiments of the Present Invention

[0039] 5. Carrier Frequency Adjustment in Accordance with Embodiments of the Present Invention

[0040] 6. Pre-Equalization

[0041] (a) Example Delay Offset Calculation Method in Accordance with Embodiments of the Present Invention

[0042] (b) Example Convolution Method in Accordance with Embodiments of the Present Invention

[0043] (c) Example Coefficient Clipping Method in Accordance with Embodiments of the Present Invention

[0044] (d) Example Coefficient Scaling Method in Accordance with Embodiments of the Present Invention

[0045] (e) Example Power Correction Method in Accordance with Embodiments of the Present Invention

[0046] D. Conclusion

[0047] While the present invention is described herein with reference to illustrative embodiments for particular applications, it should be understood that the invention is not limited thereto. Those skilled in the art with access to the teachings provided herein will recognize additional modifications, applications, and embodiments within the scope thereof and additional fields in which the present invention would be of significant utility.

[0048] A. Cable Modem System in accordance with Embodiments of the Present Invention

[0049] FIG. 1 is a high level block diagram of an example cable modem system 100 in accordance with embodiments of the present invention. The cable modem system 100 enables voice communications, video and data services based on a bi-directional transfer of packet-based traffic, such as Internet protocol (IP) traffic, between a cable system headend 102 and a plurality of cable modems over a hybrid

fiber-coaxial (HFC) cable network **110**. In the example cable modem system **100**, only two cable modems **106** and **108** are shown for clarity. In general, any number of cable modems may be included in the cable modem system of the present invention.

[0050] The cable headend **102** is comprised of at least one cable modem termination system (CMTS) **104**. The CMTS **104** is the portion of the cable headend **102** that manages the upstream and downstream transfer of data between the cable headend **102** and the cable modems **106** and **108**, which are located at the customer premises. The CMTS **104** broadcasts information downstream to the cable modems **106** and **108** as a continuous transmitted signal in accordance with a time division multiplexing (TDM) technique. Additionally, the CMTS **104** controls the upstream transmission of data from the cable modems **106** and **108** to itself by assigning to each cable modem **106** and **108** short grants of time within which to transfer data. In accordance with this time division multiple access (TDMA) technique, each cable modem **106** and **108** may only send information upstream as short burst signals during a transmission opportunity allocated to it by the CMTS **104**.

[0051] The HFC network **110** provides a point-to-multi-point topology for the high-speed, reliable, and secure transport of data between the cable headend **102** and the cable modems **106** and **108** at the customer premises. As will be appreciated by persons skilled in the relevant art(s), the HFC network **110** may comprise coaxial cable, fiberoptic cable, or a combination of coaxial cable and fiberoptic cable linked via one or more fiber nodes.

[0052] Each of the cable modems **106** and **108** operates as an interface between the HFC network **110** and at least one attached user device. In particular, the cable modems **106** and **108** perform the functions necessary to convert downstream signals received over the HFC network **110** into IP data packets for receipt by an attached user device. Additionally, the cable modems **106** and **108** perform the functions necessary to convert IP data packets received from the attached user device into upstream burst signals suitable for transfer over the HFC network **110**. For clarity, in the example cable modem system **100**, each cable modem **106** and **108** is shown supporting only a single user device **114**. In general, each cable modem **106** and **108** is capable of supporting a plurality of user devices for communication over the cable modem system **100**. User devices may include personal computers, data terminal equipment, telephony devices, broadband media players, network-controlled appliances, or any other device capable of transmitting or receiving data over a packet-switched network.

[0053] In the example cable modem system **100**, cable modem **106** and **108** represent a conventional DOCSIS-compliant cable modem. In other words, cable modem **106** and **108** transmit data packets to the CMTS **104** in formats that adhere to the protocols set forth in the DOCSIS specification.

[0054] Furthermore, in the example cable modem system **100**, the CMTS **104** operates to receive and process data packets transmitted to it in accordance with the protocols set forth in the DOCSIS specification. The manner in which the CMTS **104** operates to receive and process data will be described in further detail herein.

[0055] B. Example Cable Modem System Components in Accordance with Embodiments of the Present Invention

[0056] FIG. 2 depicts a schematic block diagram of an implementation of the CMTS **104** of cable modem system **100**, which is presented by way of example, and is not intended to limit the present invention. The CMTS **104** is configured to receive and transmit signals to and from the HFC network **110**, a portion of which is represented by the optical fiber **202** of FIG. 2. Accordingly, the CMTS **104** will be described in terms of a receiver portion and a transmitter portion.

[0057] The receiver portion includes an optical-to-coax stage **204**, an RF input **206**, a splitter **214**, and a plurality of burst receivers **216**. Reception begins with the receipt of upstream burst signals originating from one or more cable modems by the optical-to-coax stage **204** via the optical fiber **202**. The optical-to-coax stage **204** routes the received burst signals to the radio frequency (RF) input **206** via coaxial cable **208**. In embodiments, these upstream burst signals having spectral characteristics within the frequency range of roughly 542 MHz.

[0058] The received signals are provided by the RF input **206** to the splitter **214** of the CMTS **104**, which separates the RF input signals into N separate channels. Each of the N separate channels is then provided to a separate burst receiver **216** which operates to demodulate the received signals on each channel in accordance with either a Quadrature Phase Shift Key (QPSK) or Quadrature Amplitude Modulation (QAM) technique to recover the underlying information signals. The burst receiver **216** contains an equalizer which estimates channel distortions. Each burst receiver **216** also converts the underlying information signals from an analog form to digital form. This digital data is subsequently provided to the headend media access control (MAC) **218**.

[0059] The headend MAC **218** operates to process the digital data in accordance with the DOCSIS specification. The functions of the headend MAC **218** may be implemented in hardware or in software. In the example implementation of FIG. 2, the functions of the headend MAC **218** are implemented both in hardware and software. Software functions of the headend MAC **218** may be stored in either the random access memory (RAM) **220** or the read-only memory (ROM) **218** and executed by the CPU **222**. The headend MAC is in electrical communication with these elements via a backplane interface **221** and a shared communications medium **232**. In embodiments, the shared communications medium **232** may comprise a computer bus or a multiple access data network.

[0060] The headend MAC **218** is also in electrical communication with the Ethernet interface **224** via both the backplane interface **221** and the shared communications medium **232**. When appropriate, Ethernet packets recovered by the headend MAC **218** are transferred to the Ethernet interface **224** for delivery to a packet-switched network via a router.

[0061] The transmitter portion of the CMTS **104** includes a downstream modulator **226**, a surface acoustic wave (SAW) filter **228**, an amplifier **230**, an intermediate frequency (IF) output **212**, a radio frequency (RF) upconverter **210** and the optical-to-coax stage **204**. Transmission begins with the generation of a digital broadcast signal by the headend MAC **218**. The digital broadcast signal may include data originally received from the packet-switched network

via the Ethernet interface **224**. The headend MAC **218** outputs the digital broadcast signal to the downstream modulator **226** which converts it into an analog form and modulates it onto a carrier signal in accordance with either a 64-QAM or 256-QAM technique.

[0062] The modulated carrier signal output by the downstream modulator **256** is input to the SAW filter **228** which passes only spectral components of the signal that are within a desired bandwidth. The filtered signal is then output to an amplifier **230** which amplifies it and outputs it to the IF output **212**. The IF output **212** routes the signal to the RF upconverter **210**, which upconverts the signal. In embodiments, the upconverted signal has spectral characteristics in the frequency range of approximately 54-860 MHz. The upconverted signal is then output to the optical-to-coax stage **204** over the coaxial cable **208**. The optical-to-coax stage **204** broadcasts the signal via the optical fiber **202** of the HFC network **110**.

[0063] FIG. 3 depicts a schematic block diagram of an implementation of the cable modem **106** of cable modem system **100**, which is presented by way of example, and is not intended to limit the present invention. The cable modem **106** is configured to receive and transmit signals to and from the HFC network **110** via the coaxial connector **332** of FIG. 3. Accordingly, the cable modem **106** will be described in terms of a receiver portion and a transmitter portion.

[0064] The receiver portion includes a diplex filter **302**, an RF tuner **304**, a SAW filter **306**, and amplifier **308**, and a downstream receiver **310**. Reception begins with the receipt of a downstream signal originating from the CMTS **104** by the diplex filter **302**. The diplex filter **302** operates to isolate the downstream signal and route it to the RF tuner **304**. In embodiments, the downstream signal has spectral characteristics in the frequency range of roughly 54-860 MHz. The RF tuner **304** downconverts the signal and outputs it to the SAW filter **306**, which passes only spectral components of the downconverted signal that are within a desired bandwidth. The filtered signal is output to the amplifier **308** which amplifies it and passes it to the downstream receiver **310**. Automatic gain controls are provided from the downstream receiver **310** to the RF tuner **304**.

[0065] The downstream receiver **310** demodulates the amplified signal in accordance with either a 64-QAM or 256-QAM technique to recover the underlying information signal. The downstream receiver **310** also converts the underlying information signal from an analog form to digital form. This digital data is subsequently provided to the media access control (MAC) **314**.

[0066] The MAC **314** processes the digital data, which may include, for example, Ethernet packets for transfer to an attached user device. The functions of the MAC **314** may be implemented in hardware or in software. In the example implementation of FIG. 3, the functions of the MAC **314** are implemented in both hardware and software. Software functions of the MAC **314** may be stored in either the RAM **322** or the ROM **324** and executed by the CPU **320**. The MAC **314** is in electrical communication with these elements via a shared communications medium **316**. In embodiments, the shared communications medium may comprise a computer bus or a multiple access data network.

[0067] The MAC **314** is also in electrical communication with the Ethernet interface **318** via the shared communica-

tions medium **316**. When appropriate, Ethernet packets recovered by the MAC **314** are transferred to the Ethernet interface **318** for transfer to an attached user device.

[0068] The transmitter portion of the cable modem **108** includes an upstream burst modulator **326**, a digital to analog converter **327**, a low pass filter **328**, a power amplifier **330**, and the diplex filter **302**. Transmission begins with the construction of a data packet by the MAC **314**. The data packet may include data originally received from an attached user device via the Ethernet interface **318**. In accordance with embodiments of the present invention, the MAC **314** may format the data packet in compliance with the protocols set forth in the DOCSIS specification. The MAC **314** outputs the data packet to the upstream burst modulator **326** which converts it into analog form and modulates it onto a carrier signal in accordance with either a QPSK or QAM technique.

[0069] The upstream burst modulator **326** also performs pre-equalization of the modulated carrier signal using a pre-equalizer **325**. The pre-equalizer **325** is provided with a number of filter "taps" through which the modulated carrier signal is passed. One tap is designated the main tap. The remaining taps are referred to as non-main taps. Each tap has both a real part and an imaginary part. Each real part and each imaginary part are assigned equalizer coefficients that are used to cancel inter-symbol interference within the modulated carrier signal. The modulated carrier signal is passed from the pre-equalizer **325** to the low pass filter **328** which passes signals with spectral characteristics in a desired bandwidth. In embodiments, the desired bandwidth is within the frequency range of approximately 5-42 MHz. The filtered signals are then introduced to the power amplifier **330** which amplifies the signal and provides it to the diplex filter **302**. The gain in the power amplifier **330** is regulated by the burst modulator **326**. The diplex filter **302** isolates the amplified signal and transmits it upstream over the HFC network **110** during a scheduled burst opportunity.

[0070] C. Ranging Cable Modems in a Cable Modem System

[0071] When a new cable modem is added to the network and periodically thereafter, a ranging process is performed to determine the network delay between the cable modem and the cable modem termination system. This ranging process is also used to establish and maintain the power transmission level, carrier frequency, and transmission times used by the cable modem.

[0072] FIG. 4A depicts a flowchart **400** of a method for performing ranging operations in a cable modem system comprised of multiple cable modems and a cable modem termination system in accordance with embodiments of the present invention. The invention, however, is not limited to the description provided by the flowchart **400**. Rather, it will be apparent to persons skilled in the relevant art(s) from the teachings provided herein that other functional flows are within the scope and spirit of the present invention. The flowchart **400** will be described with continued reference to the example CMTS **104** and cable modem **106** of the cable modem system **100**, as well as in reference to the example hardware implementation of the cable modem **106** of FIG. 3.

[0073] Prior to making an initial ranging request, a cable modem that is newly added to the cable modem system **100** must first be initialized (step **405**).

[0074] 1. Example Initialization Method in Accordance with Embodiments of the Present Invention

[0075] FIG. 5 illustrates an initialization routine 500 for initializing the CM 106 according to an embodiment of the present invention.

[0076] In step 505, the modulator of the CM 106 is preset according to default settings determined during manufacture.

[0077] The pre-equalizer 325 has a number of taps designated herein as F_1 to F_N . One tap is designated as the main tap and the others are referred to as non-main taps. Each tap has both a real part and an imaginary part to which a pre-equalizer coefficient is assigned for performing filtering of the carrier signal.

[0078] The CM must initialize the pre-equalizer coefficients to a default setting prior to making an initial ranging request. Therefore, in step 510, the coefficient value of the real part of the first tap (F_{1real}) is set equal to one (1).

[0079] Following step 510, in a next step 515, the remaining pre-equalizer coefficients ($F_{1imaginary}$) to (F_N) are set equal to zero (0).

[0080] Finally, in a step 520, the first tap (F_1) is stored as the current main tap location. As would be understood by a person of ordinary skill in the art, the main tap location refers to the position of the zero delay tap between 1 and N.

[0081] 2. Example Ranging Request and Example Ranging Response in Accordance with Embodiments of the Present Invention

[0082] Referring again to FIG. 4A, following the initialization step 405, in step 410, a ranging request (RNG-REQ) is transmitted by the CM 106 to the CMTS 104. The RNG-REQ is comprised of a long preamble portion and a payload portion which includes MAC headers, transmitted at default settings for the power transmission level, carrier frequency, and pre-equalizer coefficients. The default settings for the pre-equalizer coefficients for the main tap and non-main taps are set during the initialization routine 500. Upon receiving the RNG-REQ, the CMTS 104 generates a ranging response (RNG-RSP).

[0083] FIG. 6A provides an illustration of the RNG-RSP message encoding according to the DOCSIS specification. The RNG-RSP includes parameters addressing, among other things, upstream communications channels, timing, power, frequency, and equalization. The upstream communications parameter 605 is used to indicate the upstream channel on which the CM 106 must transmit.

[0084] The timing adjust parameter 610 is used to indicate the time amount by which the CM106 must advance or delay its transmissions so that subsequent bursts will arrive at the CMTS 104 at the appropriate times. The power level adjust parameter 615 is used to indicate the change in transmission power level that is required in order for transmissions from the CM 106 to arrive at the CMTS 104 at the proper power level. The carrier frequency offset parameter 620 is used to indicate any changes in the transmission frequency that are needed to ensure that the CM 106 and CMTS 104 are properly aligned. The equalization parameters 625 provide the equalization coefficients used by the CM 106 to perform pre-equalization.

[0085] Referring to FIG. 6B, as required by the DOCSIS specification, the number of forward taps per symbol 630 must be either 1, 2, or 4. The main tap location 635 refers to the position of the zero delay tap, between 1 and N. For a symbol-spaced equalizer, the number of forward taps per symbol field 630 must be set to one (1). The number of reverse taps 640 (M) must be set to zero (0) for a linear equalizer. The total number of taps 645 may range up to sixty-four (64).

[0086] As stated above, each tap (F_1 - F_N) consists of a real coefficient 650 and an imaginary coefficient 655 entry in the table.

[0087] An exemplary method for generating the RNG-RSP in accordance with embodiments of the present invention will now be described with reference to FIG. 4B.

[0088] In a step 415, CMTS 104 receives the RNG-REQ from the CM 106. In response, a timing adjust parameter is determined (step 420). Following step, 420, in a step 425, a power level adjust parameter is determined. Once the power level adjust parameter has been determined, in a step 430, a carrier frequency offset parameter is determined. Upon the completion of step 430, in a step 435, equalization coefficients are determined.

[0089] In an embodiment of the present invention, the ranging response is set according to the DOCSIS 1.1 specification requirements. Accordingly, the following parameters and values are used: the main tap location (K) is set equal to four (4); the number of forward taps per symbol is set equal to one (1); the number of forward taps (N) is set equal to eight (8); and the number of reverse taps (M) is set equal to zero (0). Further, the equalizer coefficients for the taps (F_1 - F_N) are determined by the equalizer of the burst receiver 216 by estimating the overall channel response. In an alternative embodiment, where there is spectrum inversion in the up/down conversion path, the imaginary parts of the equalizer coefficients are negated.

[0090] Once the RNG-RSP is generated, it is transmitted to the CM 106 (step 440).

[0091] Returning to FIG. 4A, the RNG-RSP is subsequently received by the CM 106 (step 445).

[0092] 3. Timing Adjustment in Accordance with Embodiments of the Present Invention

[0093] The CMTS 104 requires that transmissions from each cable modem in the cable modem system 100 be received at a specified time. In a step 450, initial and periodic timing adjustments are made to maintain the timing sequence between the CM 106 and the CMTS 104. The ranging response sent to the cable modem 106 includes a timing adjust parameter. The transmission time parameter in the cable modem 106 is adjusted by an amount equal to the timing adjust parameter. By transmitting in accordance with the adjusted transmission time parameter, the cable modem 106 can expect that its subsequent transmissions will arrive at the CMTS 104 at the appropriate times.

[0094] 4. Power Level Adjustment in Accordance with Embodiments of the Present Invention

[0095] The CMTS 104 also requires that transmissions from each cable modem in the cable modem system 100 be received at a specified power level. In a step 455, initial and

periodic power level adjustments are made to maintain the appropriate power level at the CM 106. The ranging response sent to the cable modem 106 includes a power level adjust parameter. The power transmission level parameter in the cable modem 106 is adjusted by an amount equal to the power level adjust parameter. By transmitting in accordance with the adjusted power transmission level parameter, the cable modem 106 can expect that its transmissions will arrive at the CMTS 104 at the appropriate power level.

[0096] 5. Carrier Frequency Adjustment in Accordance with Embodiments of the Present Invention

[0097] The CMTS 104 also requires that transmissions from each cable modem in the cable modem system 100 be received at a specified upstream carrier frequency. In a step 460, initial and periodic carrier frequency adjustments are made to maintain the appropriate carrier frequency settings. The ranging response sent to the cable modem 106 includes a carrier frequency offset parameter. The upstream carrier frequency parameter in the cable modem 106 is adjusted by an amount equal to the carrier frequency offset parameter. In an embodiment of the present invention, the carrier frequency offset parameter can be averaged over multiple periodic ranging iterations in either the CM 106 or the CMTS 104 in order to improve the accuracy of the carrier frequency offset parameter.

[0098] 6. Pre-Equalization

[0099] In a step, 465, pre-equalization is performed. Pre-Equalization is used to reduce noise and improve the overall quality of transmissions exchanged between the cable modem 106 and the CMTS 104. FIG. 7 provides an exemplary pre-equalization routine in accordance with embodiments of the present invention.

[0100] (a) Example Delay Offset Calculation Method in Accordance with Embodiments of the Present Invention

[0101] In step 715, the CM 106 determines a delay offset. The delay offset represents the time by which frame transmission should be offset so that frames transmitted by the CM 106 arrive at the CMTS 104 at the appropriate time.

[0102] Referring to FIG. 8, if this is the first RNG-RSP received by the CM 106 after initialization (step 805), then in a step 810, the delay offset is calculated as $-(\text{Main tap location}-1) \times (10.24 \text{ MHz/sym_rate})$.

[0103] In a step 815, the delay offset value determined in step 810 is added to the timing adjust parameter provided in the RNG-RSP message.

[0104] When a subsequent RNG-RSP message is received, in a step 820, the delay offset is calculated as the $(\text{current main tap location}-\text{the main tap location specified in the ranging response}) \times (10.24 \text{ MHz/Sym_rate})$.

[0105] In a step 825, the current main tap location is set equal to the main tap location specified in the subsequent RNG-RSP message.

[0106] (b) Example Convolution Method in Accordance with Embodiments of the Present Invention

[0107] Once the delay offset has been determined, convolution is performed (FIG. 7, step 720). An exemplary convolution routine in accordance with an embodiment of the present invention will be described with reference to FIG. 9.

[0108] In a step 905, a determination is made as to whether the RNG-RSP message is the first ranging response received since the CM 106 was initialized.

[0109] In response to receiving the first RNG-RSP the current pre-equalizer coefficients are set equal to the ranging response equalizer coefficients transmitted in the RNG-RSP (step 910).

[0110] As subsequent RNG-RSP messages are received, the CM 106 must convolve the current pre-equalizer coefficients set during initialization or previous ranging iterations with the ranging request equalizer coefficients received in the RNG-RSP message. Accordingly, in a step 915, the current pre-equalizer coefficients are convolved in an embodiment of the present invention using the equation:

$$C'_j = \sum_{i=1}^N F_i C_{j-i+K} \quad (\text{EQ1})$$

[0111] where C_j and C'_j are the respective current and new pre-equalizer coefficients. K is the main tap location, N is the number of feedforward taps (for example, $N=8$), and $F(i)$ are the ranging request equalizer coefficients in the RNG-RSP message sent by the CMTS 104. In the present example where $N=8$, the value of C_i outside the range ($i=1-8$) of the equalizer tap span should be set to zero (0). It therefore follows that the coefficients C_{-6} to C_0 and C_9 to C_{15} would be set equal to zero (0).

[0112] Phase noise in the vector summation occurring during the convolution process produces phase rotation. Therefore, after each convolution (step 910 or 915), the main tap must be derotated so that the imaginary part of the main tap=0. In this way the gain loss is minimized. Thus, in a step 920, where the value of the imaginary part of the main tap is small, the imaginary value is simply reset to zero (0). Alternatively, where the imaginary part value is not small, the main tap angle must be calculated and derotated according to steps that would be apparent to a person of ordinary skill in the art after reading the disclosure provided herein. (c) Example Coefficient Clipping Method in Accordance with Embodiments of the Present Invention

[0113] Referring again to FIG. 7, once convolution has been completed, in a step 725, coefficient clipping is performed. Coefficient clipping is used to reduce the self noise effect resulting from the convolution process. An exemplary routine for performing coefficient clipping in accordance with an embodiment of the present invention will now be described with reference to FIG. 10.

[0114] Referring to FIG. 10, in an embodiment of the present invention, the magnitude squared value from both the real and imaginary parts of any non-main taps is determined (step 1005).

[0115] Next, in step 1010, for all non-main tap values of the real and imaginary parts of the new pre-equalizer coefficients whose magnitude squared value ($F_{\text{ireal}}^2 + F_{\text{imaginary}}^2$) is less than a determined threshold (for example, -36 dB , 0.00025 in linear representation) is reset to zero (0). In this way any noise resulting from the new pre-equalizer coefficients and the convolution process is reduced.

[0116] (d) Example Coefficient Scaling Method in Accordance with Embodiments of the Present Invention

[0117] Referring again to FIG. 7, in a step 730, coefficient scaling is performed. Coefficient scaling is used to prevent overloading of the CM modulator. An exemplary routine for performing coefficient scaling according to an embodiment of the present invention will now be described with reference to FIG. 11.

[0118] In a step 1105, scaled coefficients are determined using the equation:

$$\bar{C}_i = (C_i) / \sum_{i=1}^N (|C_i^{real}| + |C_i^{imag}|) \quad (\text{EQ2A})$$

[0119] Where C_i refers to either the real or imaginary part of the new equalizer coefficients. In this way the new pre-equalizer coefficients are normalized in an absolute-sum sense.

[0120] In an alternative embodiment, Root Mean Squared (RMS) or equivalently L(2)-norm scaling is used. Accordingly, scaled coefficients can also be determined using the equation:

$$\bar{C}_i = (C_i) / \left(\sqrt{\sum_{i=1}^N (C_i^{real})^2 + (C_i^{image})^2} \right) \quad (\text{EQ2B})$$

[0121] Once the scaled coefficients $\bar{C}_i$ have been determined, they are loaded into the pre-equalizer 325 of CM 106 (step 1110).

[0122] Next, in a step 1115, the current coefficient values are set equal to the scaled coefficients. The current coefficient values are then used for subsequent convolution iterations.

[0123] (e) Example Power Correction Method in Accordance with Embodiments of the Present Invention

[0124] Following step 730, power correction is performed. (Step 735) The equalizer coefficients produce a change in the overall transmit power of the CM.

[0125] This change needs to be compensated for in the output power of the CM. The changes made to the output power to compensate for the equalizer coefficients are in addition to any power adjustments indicated in the power level adjust field of the received RNG-RSP message. An exemplary method for performing power correction is explained with reference to FIG. 12.

[0126] Referring to FIG. 12, in an embodiment of the present invention, in step 1205, output power change corresponding to an equalizer coefficient gain change value (ΔP) is calculated in dB using the equation:

$$\Delta P(\text{dB}) = 10 \log_{10}(P_{\text{cur}}/P_{\text{new}}) \quad (\text{EQ3})$$

[0127] Where P_{new} represents a new equalizer coefficient gain value and is derived from the equation:

$$P = \sum_{i=1}^N ((\bar{C}_i^{real})^2 + (\bar{C}_i^{imag})^2) \quad (\text{EQ4})$$

[0128] P_{cur} is a current equalizer gain value and $\bar{C}_i$ refers to the final, scaled coefficients. In an embodiment, P_{cur} is set to be one (1) during initial ranging or whenever the pre-equalizer is reset to a default setting. Otherwise, P_{cur} refers to the equalizer coefficient gain value determined in a previous iteration. In step 1210, the new equalizer coefficient gain value is stored along with the new pre-equalizer coefficients. The absolute transmit power level may need to be calculated or tabulated during each ranging to make sure that its level does not exceed the maximum limit allowed in the specification (e.g. 58 dBmV for QPSK and 55 dBmV for 16QAM. For the overall power calculation, the new equalizer coefficient gain value determined above should also be accounted for along with the power amp gain in the RF section. Accordingly, the overall transmission power (Overall_TX_power) is set as the result of new equalizer coefficient gain value+the power amp gain in dB.

[0129] In an embodiment of the present invention, the ranging process 400 should be performed in accordance with the order presented (i.e., time, power, carrier frequency, and pre-equalization). One of ordinary skill in the art will recognize that the operations can be performed in a different sequential order. For example, time and power can be corrected in parallel with carrier frequency and pre-equalization. However, the pre-equalizer coefficient routine should follow after the carrier frequency correction. Further, in an embodiment, the pre-equalization step should be performed for at least two iterations.

[0130] Conclusion

[0131] The previous description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present invention. While the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

What is claimed is:

1. A method for performing ranging operations in a cable modem system that includes two or more cable modems, comprising the steps of:

(a) receiving at a cable modem, a ranging response generated by a cable modem termination system, the ranging response comprised of a plurality of ranging parameters including an upstream communications parameter, a timing adjust parameter, a power level adjust parameter, a carrier frequency offset parameter, and a plurality of equalization parameters, the equalization parameters including a number of ranging response equalizer coefficients, wherein the ranging response is the first ranging response received since the cable modem was initialized;

(b) setting a current pre-equalizer coefficient for each one of a plurality of taps at the cable modem equal to the

ranging response equalizer coefficients to generate new pre-equalizer coefficients, wherein one of said plurality of taps is designated a main tap and the remaining number of said plurality of taps are referred to as non-main taps and further wherein each one of said plurality of taps has a real part and an imaginary part;

- (c) derotating the new pre-equalizer coefficients so that the imaginary part of the main tap is equal to zero;
- (d) identifying each non-main tap having a determined magnitude squared value below a specified threshold and setting the new pre-equalizer coefficients for the real part and the imaginary part of each identified non-main tap to zero;
- (e) generating scaled coefficients using the new pre-equalizer coefficients for the main tap and non-main taps obtained from steps (c) and (d); and
- (f) adjusting a transmit power of the cable modem using an equalizer coefficient gain change value, the equalizer coefficient gain change value being determined from a current equalizer coefficient gain value and a new equalizer coefficient gain value in accordance with EQ3, wherein the new equalizer coefficient gain value is determined from EQ4 and C_i refers to the generated scaled coefficients.

2. The method of claim 1, wherein said cable modem termination system determines said timing adjust parameter and thereafter determines said power level adjust parameter and further wherein said carrier frequency offset parameter is determined after determining said power level adjust parameter and before determining said plurality of equalization parameters.

3. The method of claim 1, wherein said generating scaled coefficients step (e) generates the scaled coefficients in accordance with EQ2A, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of both the main tap and the non-main taps from steps (c) and (d).

4. The method of claim 1, wherein said generating scaled coefficients step (e) generates the scaled coefficients in accordance with EQ2B, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of both the main tap and the non-main taps from steps (c) and (d).

5. The method of claim 1, wherein said receiving a ranging response step (a) comprises receiving a number of ranging response equalizer coefficients wherein the ranging response equalizer coefficients associated with the imaginary parts of the main tap and the non-main taps are negated from a coefficient equalizer set in said cable modem termination system.

6. The method of claim 1, further comprising the steps of

adjusting a transmission time parameter of the cable modem by an amount equal to the timing adjust parameter received in the ranging response prior to performing steps (b), (c), (d), (e), and (f);

adjusting a power transmission level parameter of the cable modem by an amount equal to the power level adjust parameter received in the ranging response after setting the transmission time parameter and prior to performing steps (b), (c), (d), (e), and (f); and

adjusting an upstream carrier frequency parameter of the cable modem by an amount equal to the carrier frequency offset parameter received in the ranging

response after setting the power transmission level parameter and prior to performing steps (b), (c), (d), (e), and (f).

7. The method of claim 6, further comprising the step of averaging the carrier frequency offset parameter over multiple ranging iterations.

8. The method of claim 1, wherein said cable modem termination system determines said timing adjust parameter, said power level adjust parameter, and said carrier frequency offset parameter before determining said plurality of equalization parameters.

9. The method of claim 1, wherein said cable modem termination system determines said carrier frequency offset parameter before determining said plurality of equalization parameters.

10. A method for performing ranging operations in a cable modem system that includes two or more cable modems, comprising the steps of:

- (a) receiving at a cable modem, a subsequent ranging response generated by a cable modem termination system after generating a first ranging response, the subsequent ranging response comprised of a plurality of ranging parameters including an upstream communications parameter, a timing adjust parameter, a power level adjust parameter, a carrier frequency offset parameter, and a plurality of equalization parameters, the equalization parameters including a main tap location and a number of ranging response equalizer coefficients;

- (b) using the ranging response equalizer coefficients to convolve a number of current pre-equalizer coefficients for a main tap and one or more non-main taps located in the cable modem according to EQ1 to generate new pre-equalizer coefficients and derotating the new pre-equalizer coefficients so that an imaginary part of the main tap is equal to zero;

- (c) identifying each non-main tap having a determined magnitude squared value below a specified threshold and setting the new pre-equalizer coefficient for a real part and an imaginary part of the identified non-main taps equal to zero;

- (d) generating scaled coefficients using the new pre-equalizer coefficients for the main tap and non-main taps from steps (b) and (c); and

- (e) adjusting a transmit power of the cable modem using an equalizer coefficient gain change value, the equalizer coefficient gain change value being determined from a current equalizer coefficient gain value and a new equalizer coefficient gain value in accordance with EQ3, wherein the new equalizer coefficient gain value is determined from EQ4 and C_i refers to the generated scaled coefficients.

11. The method of claim 10, wherein the current equalizer coefficient gain value used in adjusting step (e) is equal to the new equalizer coefficient gain value.

12. The method of claim 10, wherein said cable modem termination system determines said timing adjust parameter and thereafter determines said power level adjust parameter and further wherein said carrier frequency offset parameter is determined after determining said power level adjust parameter and before determining said plurality of equalization parameters.

13. The method of claim 10, wherein said generating scaled coefficients step (d) generates the scaled coefficients in accordance with EQ2A, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of both the main tap and the non-main taps from steps (b) and (c).

14. The method of claim 10, wherein said generating scaled coefficients step (d) generates the scaled coefficients in accordance with EQ2B, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of both the main tap and the non-main taps from steps (b) and (c).

15. The method of claim 10, wherein said receiving a subsequent ranging response step (a) comprises receiving a number of ranging response equalizer coefficients, wherein the ranging response equalizer coefficients associated with the imaginary parts of the main tap and the non-main taps are negated from a coefficient set in the cable modem termination system.

16. The method of claim 10, further comprising the steps of

adjusting a transmission time parameter of the cable modem by an amount equal to the timing adjust parameter received in the ranging response prior to performing steps (b), (c), (d), and (e);

adjusting a power transmission level parameter of the cable modem by an amount equal to the power level adjust parameter received in the ranging response after setting the transmission time parameter and prior to performing steps (b), (c), (d), and (e); and

adjusting an upstream carrier frequency parameter of the cable modem by an amount equal to the carrier frequency offset parameter received in the ranging response after setting the power transmission level parameter and prior to performing steps (b), (c), (d), and (e).

17. The method of claim 10, further comprising the step of averaging the frequency offset parameter over multiple ranging iterations.

18. The method of claim 10, wherein said cable modem termination system determines said timing adjust parameter, said power level adjust parameter, and said carrier frequency offset parameter before determining said plurality of equalization parameters.

19. The method of claim 10, wherein said cable modem termination system determines said carrier frequency offset parameter before determining said plurality of equalization parameters.

20. A system for performing ranging operations in a cable modem system including two or more cable modems, comprising:

(a) means for receiving a subsequent ranging response at a cable modem, the subsequent ranging response comprised of a plurality of ranging parameters including an upstream communications parameter, a timing adjust parameter, a power level adjust parameter, a carrier frequency offset parameter, and a plurality of equalization parameters, the equalization parameters including a main tap location, and a number of ranging response equalizer coefficients;

(b) means for convolving a number of current equalizer coefficients for a main tap and a number of non-main taps located at the cable modem according to EQ1

using the ranging response equalizer coefficients to generate new equalizer coefficients and means for derotating the new equalizer coefficients so that an imaginary part of the main tap is equal to zero;

(c) means for identifying each non-main tap having a determined magnitude squared value below a specified threshold and setting the new pre-equalizer coefficient for a real part and an imaginary part equal to zero;

(d) means for generating scaled coefficients; and

(e) means for adjusting a transmit power of the cable modem using a equalizer coefficient gain change value, the equalizer coefficient gain change value being determined from a current equalizer coefficient gain value and a new equalizer coefficient gain value in accordance with EQ3, wherein the new equalizer coefficient gain value is determined from EQ4 and $\hat{C}_i$ refers to the generated scaled coefficients.

21. A system for performing ranging operations in a cable modem system, comprising:

(a) a cable modem termination system configured to generate a ranging response, the ranging response comprised of a plurality of ranging parameters including an upstream communications parameter, a timing adjust parameter, a power level adjust parameter, a carrier frequency offset parameter, and a plurality of equalization parameters, the equalization parameters including a main tap location, and a number of ranging response equalizer coefficients;

(b) one or more cable modems configured to convolve a number of current pre-equalizer coefficients for a main tap and a number of non-main taps associated with each cable modem according to EQ1 using the ranging response equalizer coefficients to generate new pre-equalizer coefficients and to derotate the new pre-equalizer coefficients so that an imaginary part of the main tap is equal to zero.

22. The system of claim 21, wherein the one or more cable modems are further configured to identify each non-main tap having a determined magnitude squared value below a specified threshold and set the new pre-equalizer coefficient for a real part and an imaginary part equal to zero.

23. The system of claim 22, wherein the one or more cable modems are further configured to generate scaled coefficients using EQ2A, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of the main tap and non-main taps.

24. The system of claim 22, wherein the one or more cable modems are further configured to generate scaled coefficients using EQ2B, where C_i refers to the new pre-equalizer coefficients for the real and imaginary parts of the main tap and non-main taps.

25. The system of claim 22, wherein the one or more cable modems are further configured to adjust a transmit power of the cable modem using a equalizer coefficient gain change value, the equalizer coefficient gain change value being determined from a current equalizer coefficient gain value and a new equalizer coefficient gain value in accordance with EQ3, wherein the new equalizer coefficient gain value is determined from EQ4 and $\hat{C}_i$ refers to the generated scaled coefficients.

* * * * *