

(10) **Patent No.:** US 9,397,217 B2
(45) **Date of Patent:** Jul. 19, 2016

29/7835; H01L 29/7851; H01L 29/41; H01L
29/41775

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,989,856	B2	8/2011	Goto et al.	
2002/0074602	A1 *	6/2002	Lin et al.	257/355
2004/0203211	A1 *	10/2004	Yang et al.	438/299
2005/0148131	A1 *	7/2005	Brask	438/199
2005/0164493	A1 *	7/2005	Liaw	438/637
2006/0046449	A1 *	3/2006	Liaw	438/585
2006/0071291	A1 *	4/2006	Yagishita	257/471
2006/0073647	A1 *	4/2006	Inaba	438/157
2006/0223335	A1 *	10/2006	Mathew	H01L 21/26506
				438/766
2006/0244066	A1 *	11/2006	Yeo et al.	257/347
2006/0261411	A1 *	11/2006	Hareland et al.	257/353

(Continued)

FOREIGN PATENT DOCUMENTS

KR	20110098594	9/2011
TW	200425299	11/2004

Primary Examiner — Khiem D Nguyen
Assistant Examiner — Pauline Vu

(74) *Attorney, Agent, or Firm* — Slater Matsil, LLP

(57) **ABSTRACT**

The invention relates to a contact structure of a semiconductor device. An exemplary structure for a semiconductor device comprises an insulation region over a substrate; a gate electrode layer over the insulation region comprising a gate middle line; a first contact structure over the insulation region adjacent to the gate electrode layer comprising a first middle line, wherein the first middle line and the gate middle line has a first distance; and a second contact structure over the insulation region on a side of the gate electrode layer opposite to the first contact structure comprising a second middle line, wherein the second middle line and the gate middle line has a second distance greater than the first distance.

19 Claims, 13 Drawing Sheets

(56)

References Cited

U.S. PATENT DOCUMENTS

2007/0001219	A1 *	1/2007	Radosavljevic et al.	257/327	2010/0155846	A1 *	6/2010	Mukherjee	H01L 21/28512
2007/0019479	A1 *	1/2007	Kim et al.	365/189.05	2010/0187656	A1 *	7/2010	Ke et al.	257/365
2007/0029576	A1 *	2/2007	Nowak et al.	257/209	2010/0200916	A1 *	8/2010	Gossner	257/586
2007/0108471	A1 *	5/2007	Oishi	257/192					H01L 29/083
2007/0132009	A1 *	6/2007	Takeuchi	H01L 21/845	2010/0237436	A1 *	9/2010	Inaba	257/335
				257/321	2010/0276761	A1 *	11/2010	Tung et al.	257/392
2007/0181942	A1 *	8/2007	Knoblinger et al.	257/336	2011/0068407	A1 *	3/2011	Yeh et al.	257/384
2008/0067613	A1 *	3/2008	Anderson et al.	257/401	2011/0133285	A1 *	6/2011	Liaw	257/369
2008/0142849	A1 *	6/2008	Alvarez	H01L 21/26513	2011/0210404	A1	9/2011	Su et al.	257/368
				257/213	2012/0001197	A1 *	1/2012	Liaw et al.	257/77
2009/0001464	A1 *	1/2009	Booth et al.	257/347	2012/0043609	A1 *	2/2012	Hafez et al.	257/337
2009/0184306	A1 *	7/2009	Mathew	H01L 27/2436	2012/0168817	A1	7/2012	Abou-Khalil et al.	
				257/3	2012/0193707	A1 *	8/2012	Huang	H01L 29/7816
2010/0038679	A1 *	2/2010	Chan et al.	257/190					257/335
					2012/0211807	A1	8/2012	Yu et al.	
					2014/0008733	A1 *	1/2014	Shrivastava	H01L 21/823807
									257/401

* cited by examiner

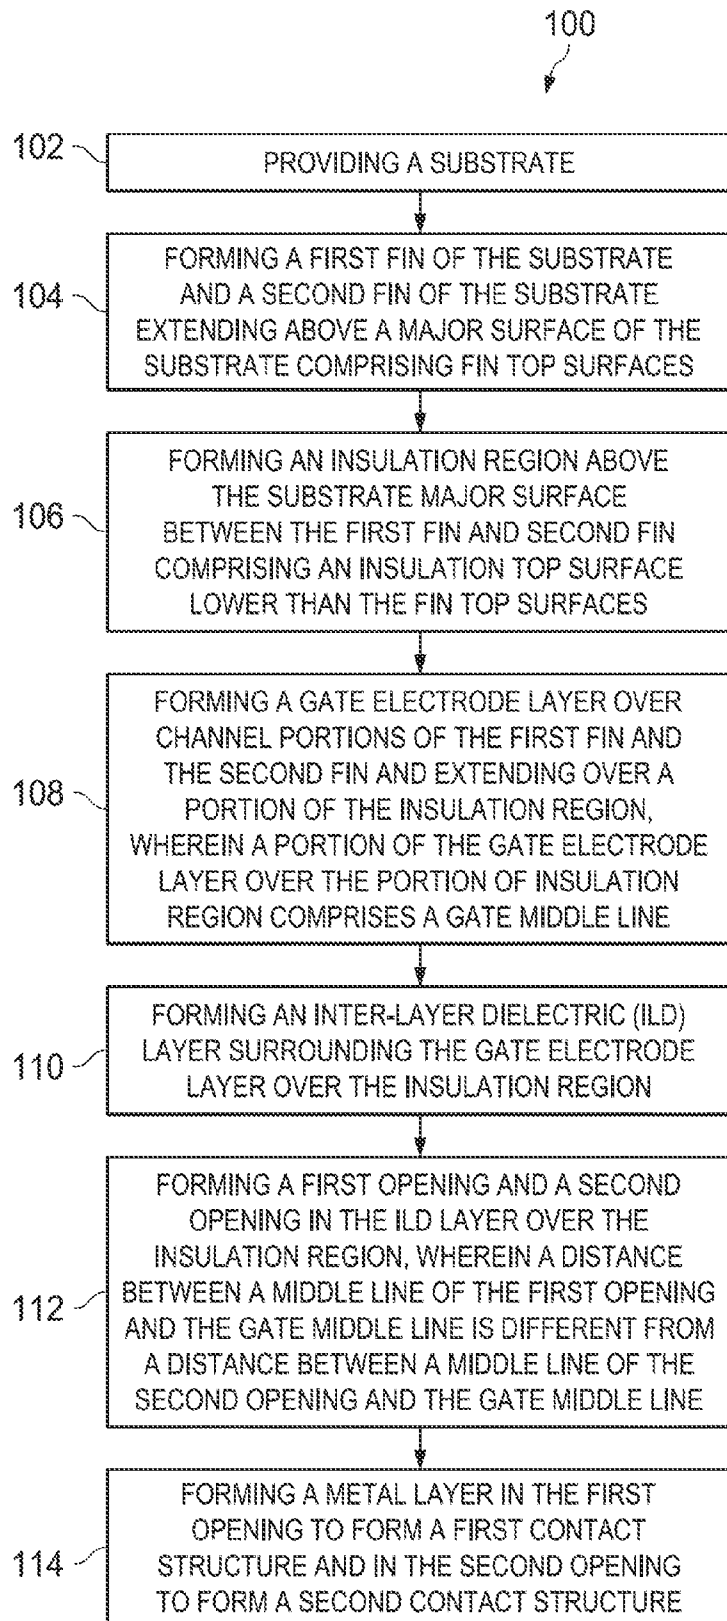
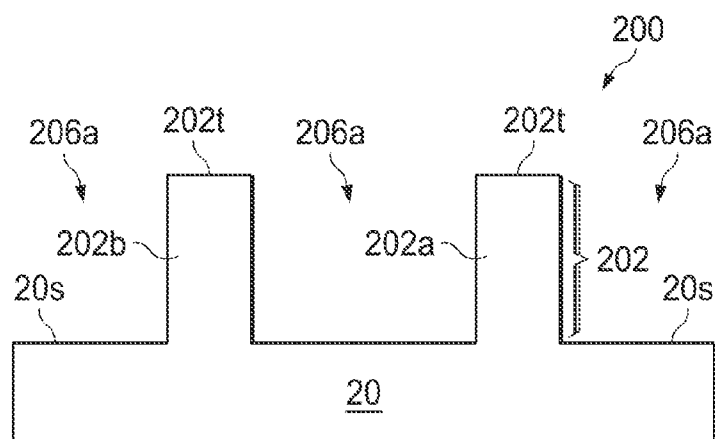
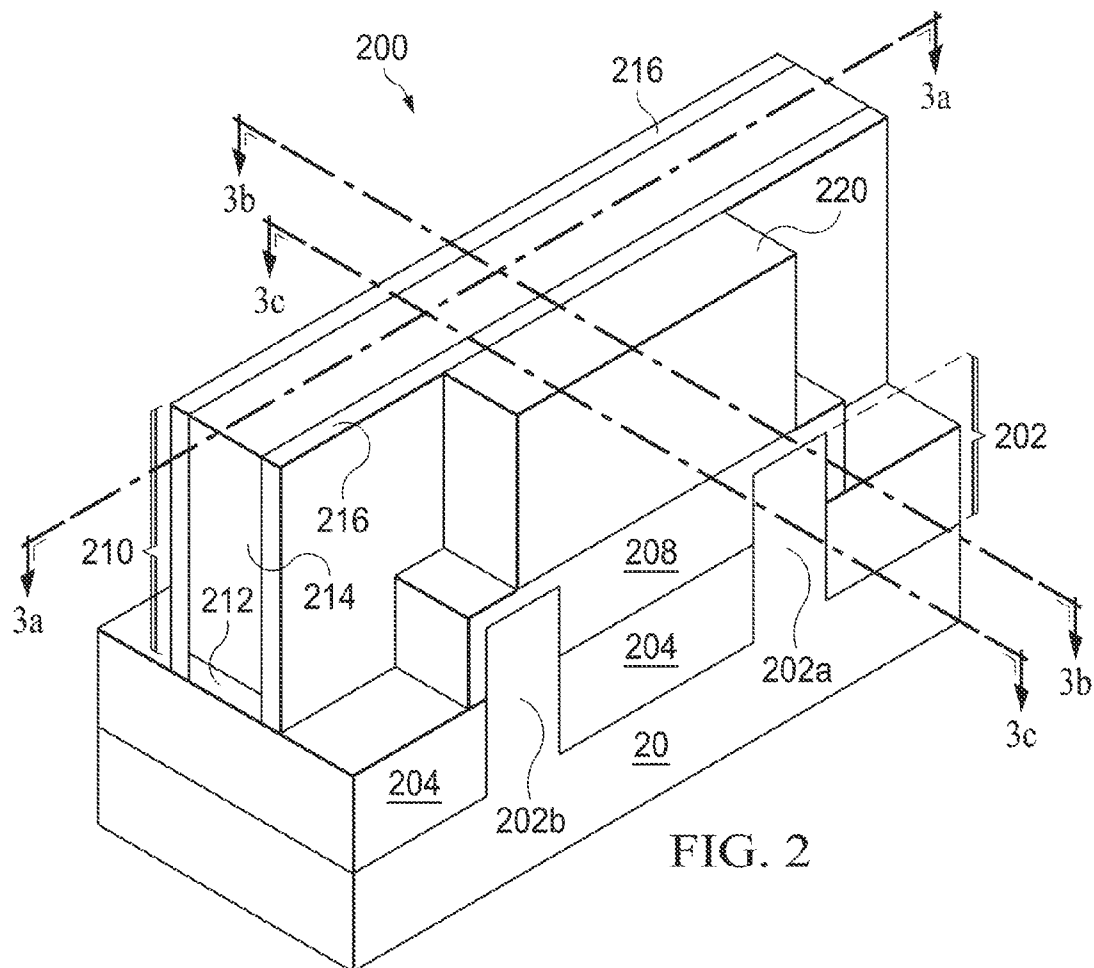


FIG. 1



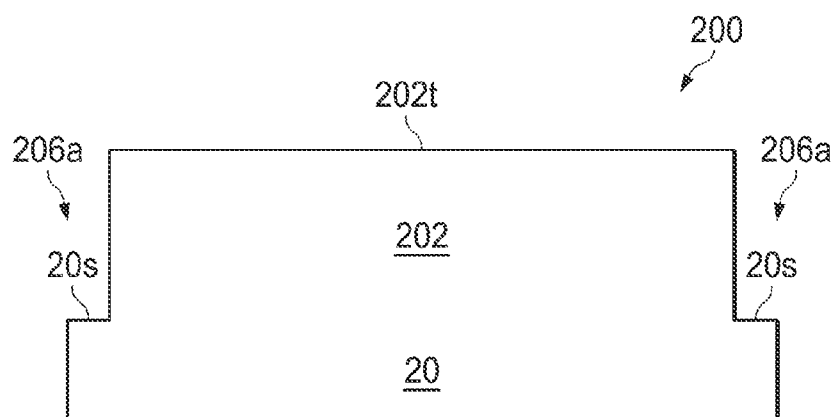


FIG. 3B

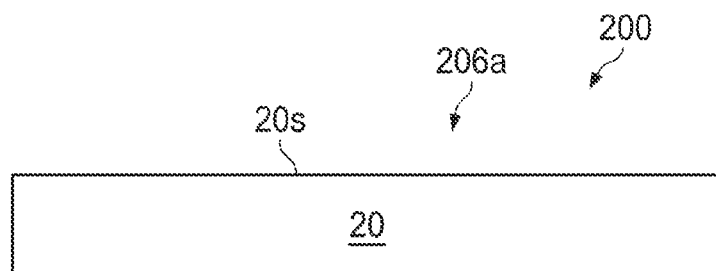


FIG. 3C

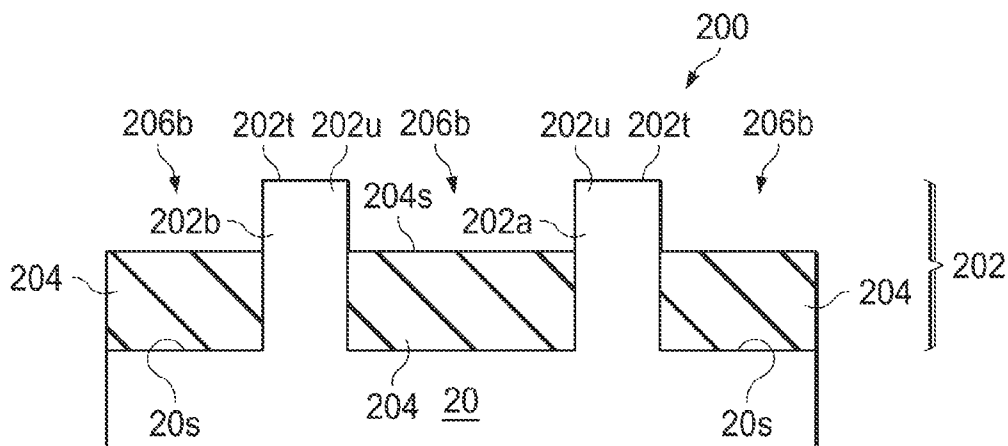


FIG. 4A

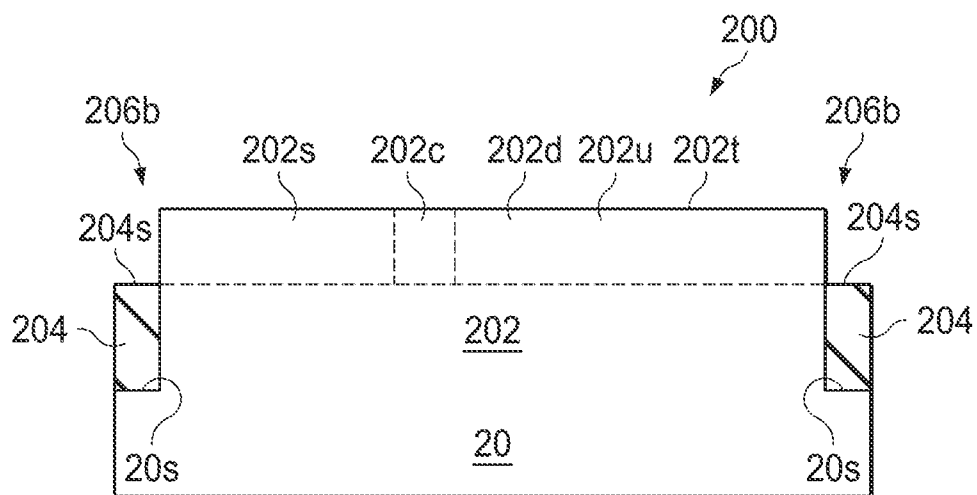


FIG. 4B

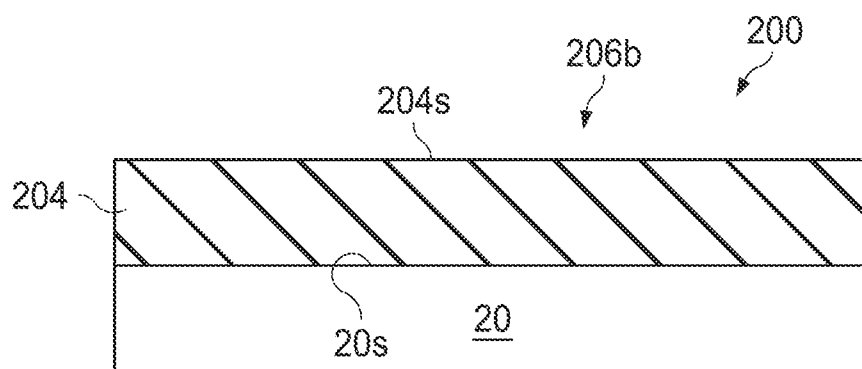


FIG. 4C

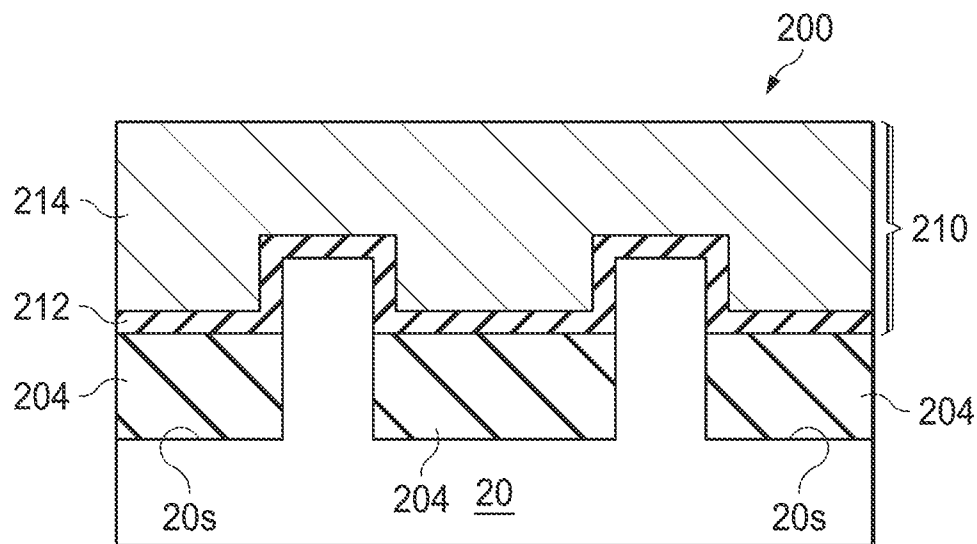


FIG. 5A

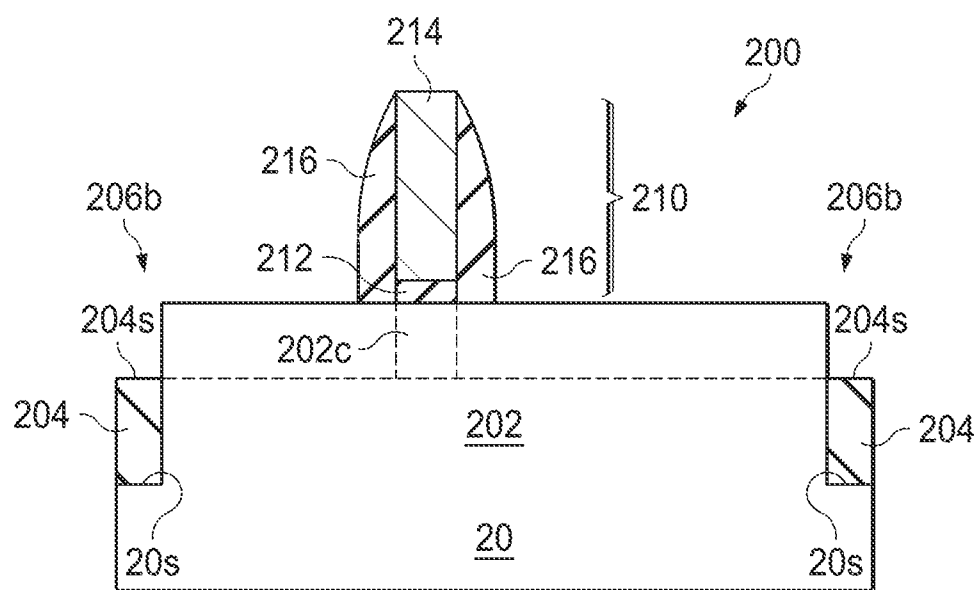


FIG. 5B

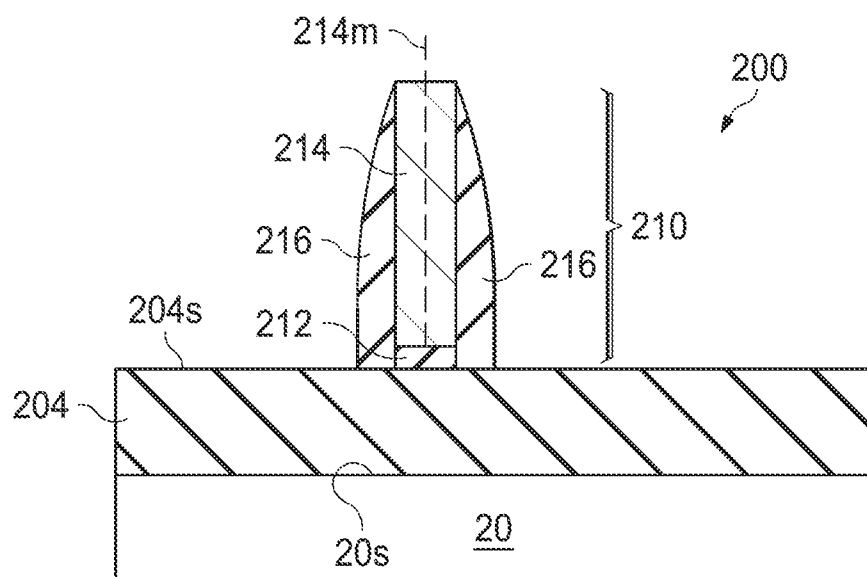


FIG. 5C

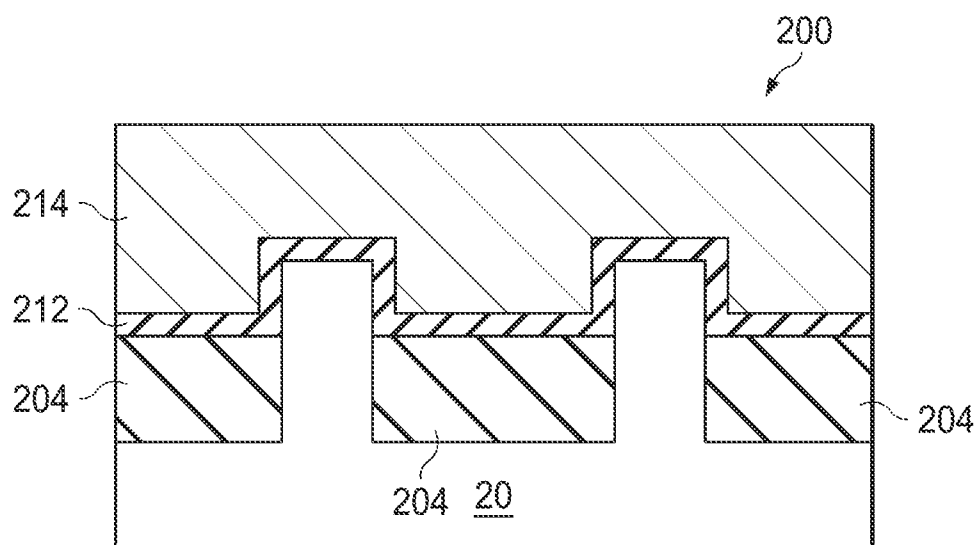


FIG. 6A

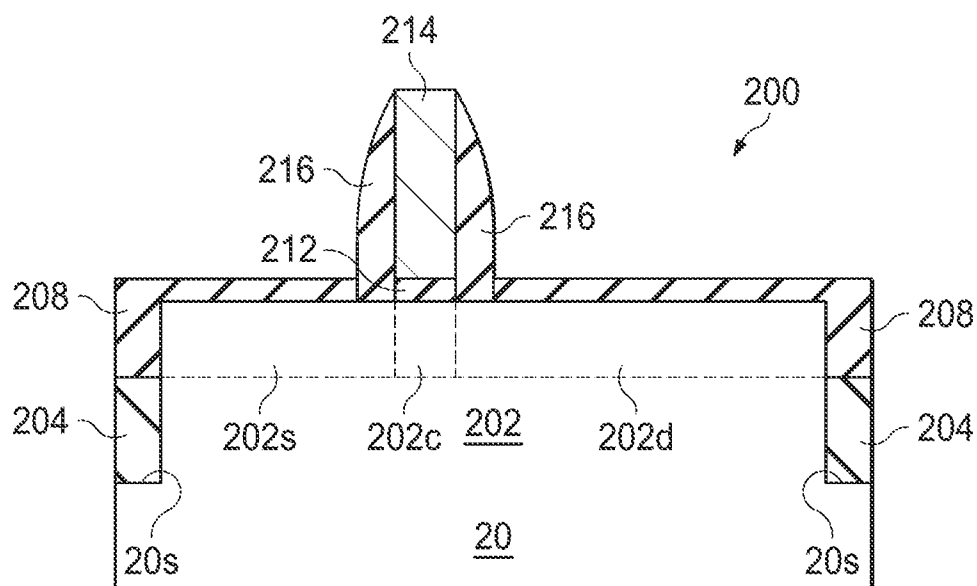


FIG. 6B

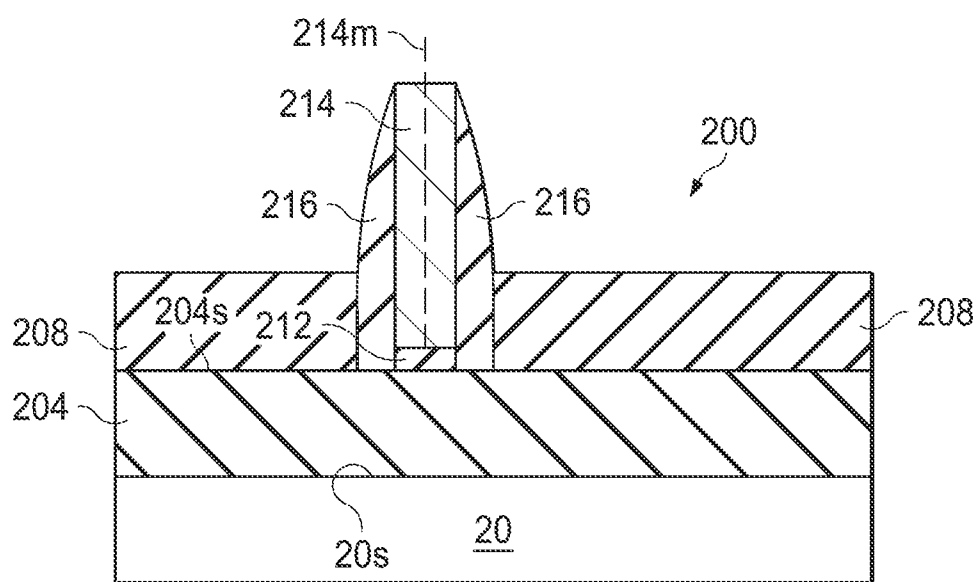


FIG. 6C

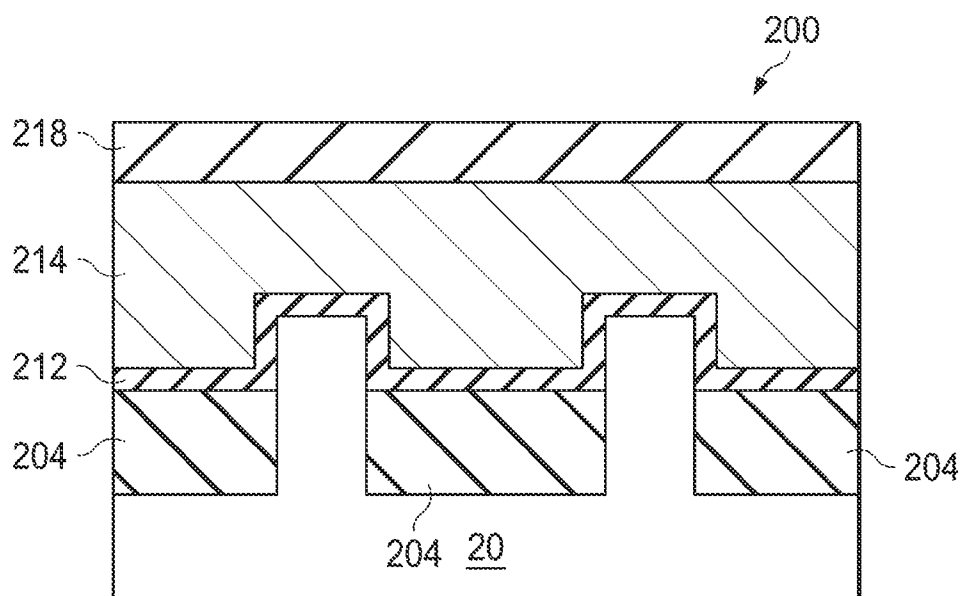


FIG. 7A

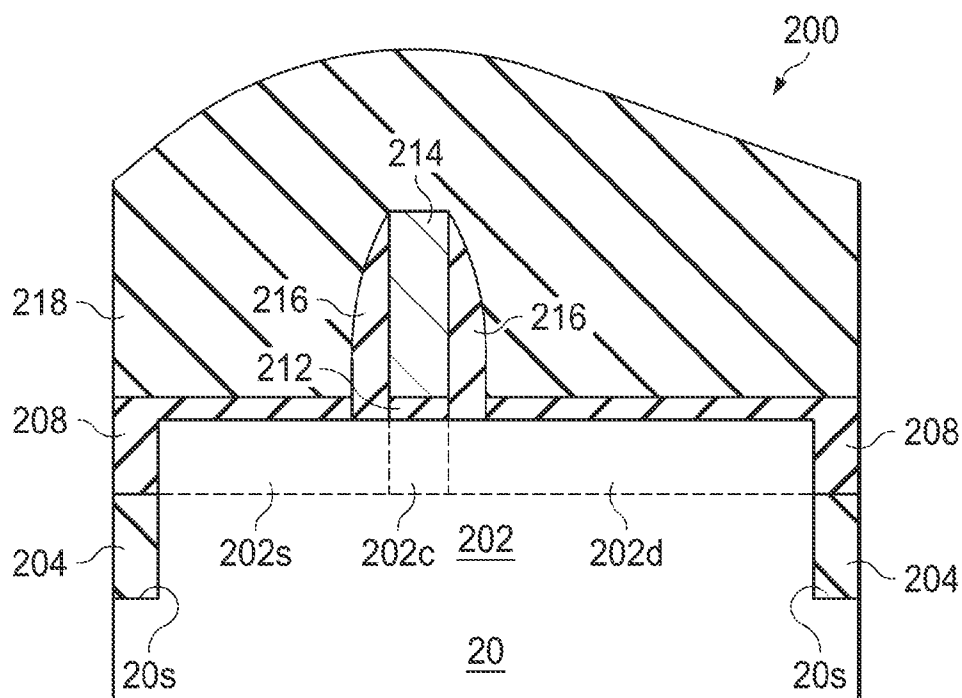


FIG. 7B

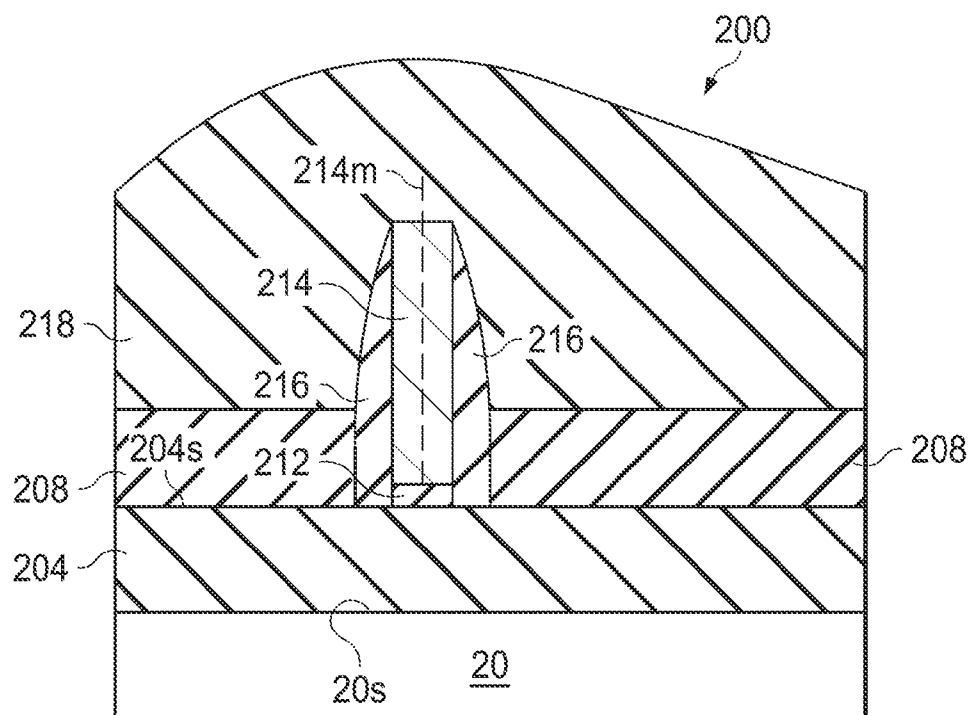


FIG. 7C

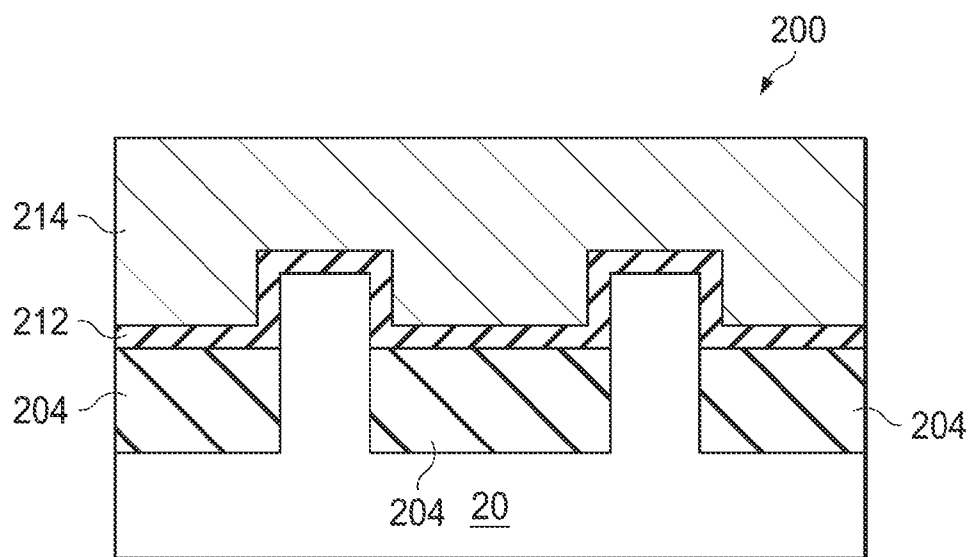


FIG. 8A

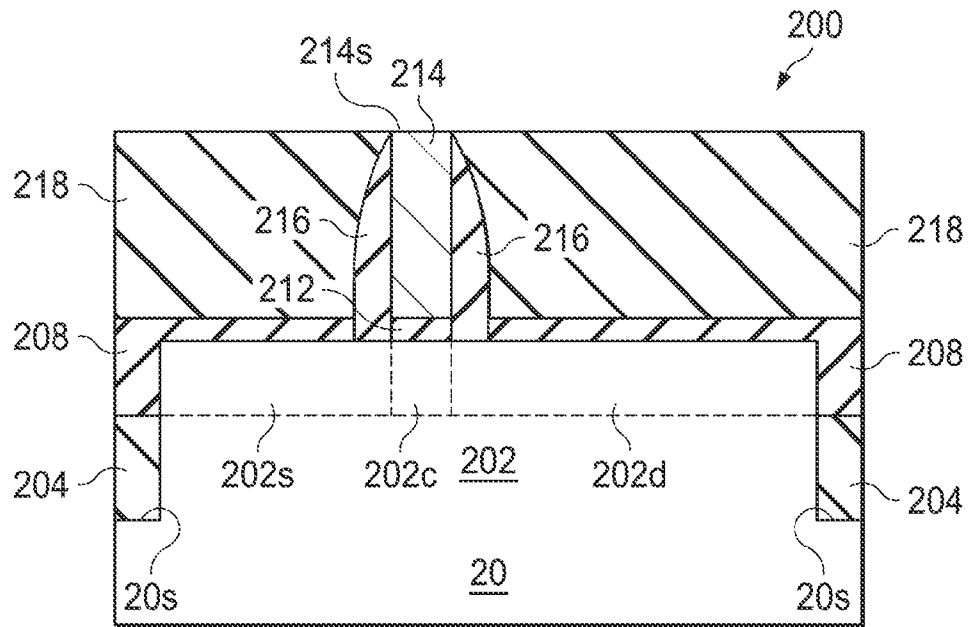


FIG. 8B

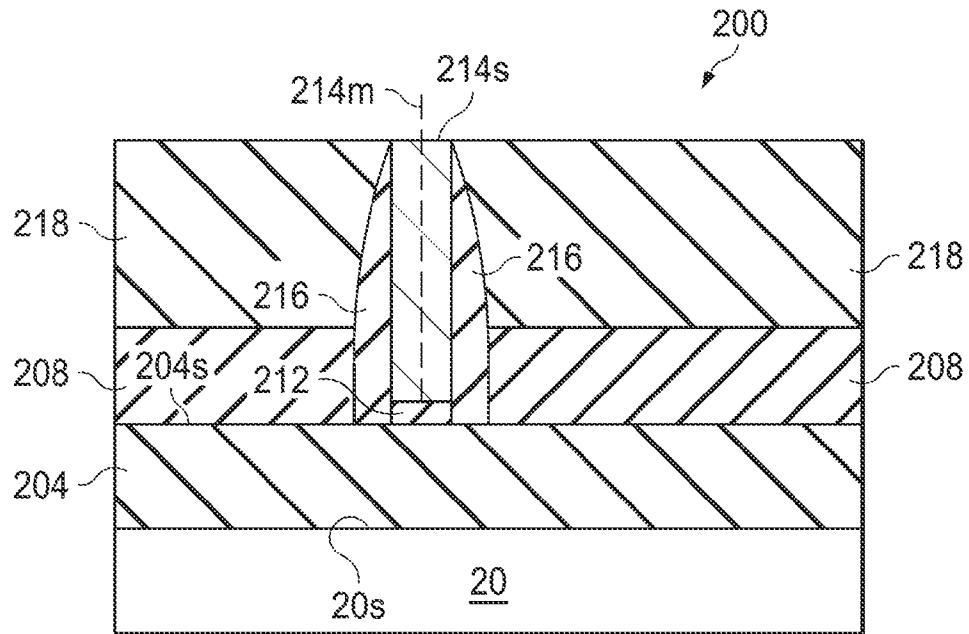


FIG. 8C

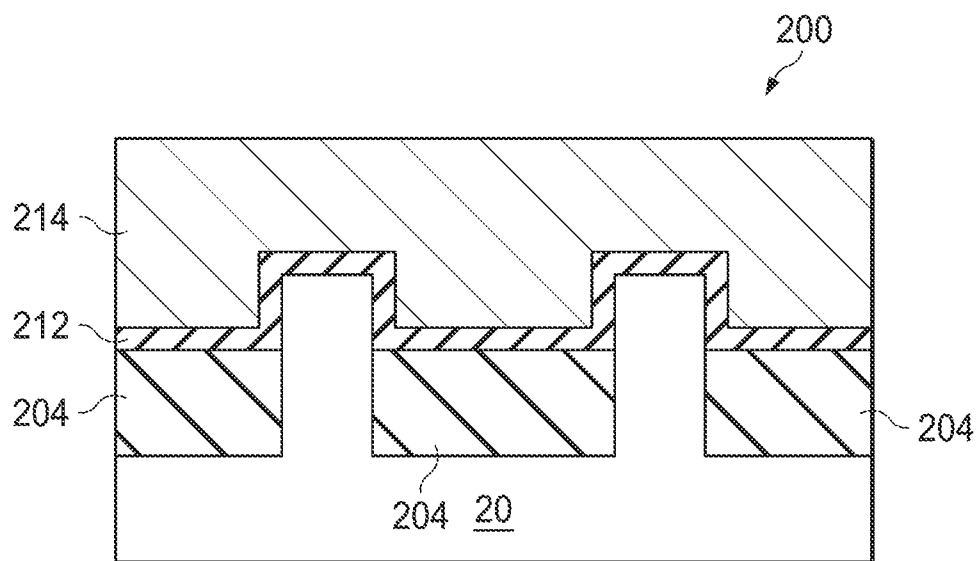


FIG. 9A

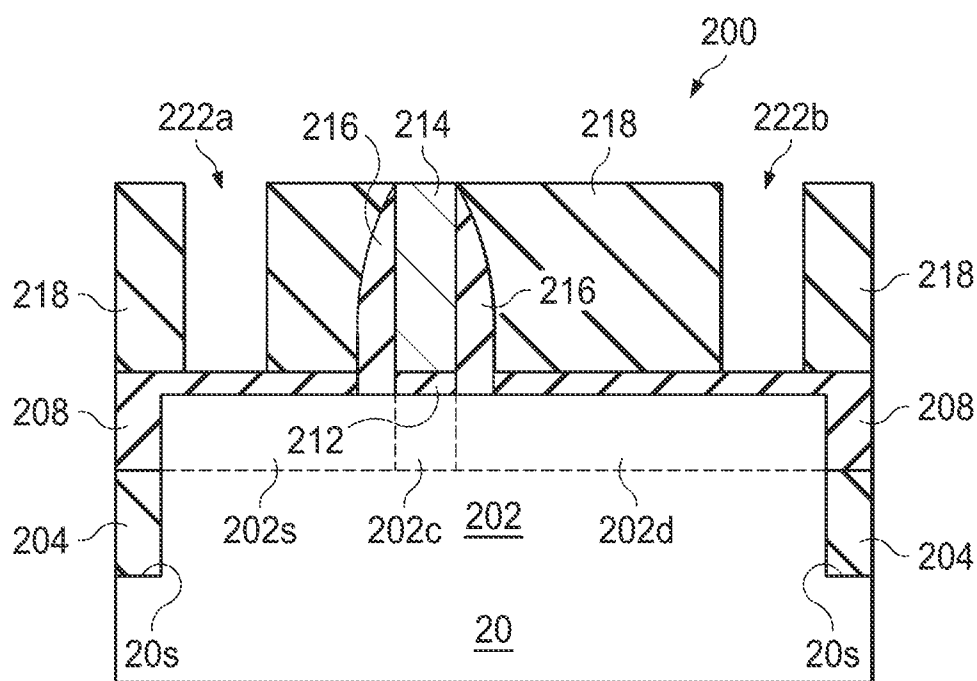


FIG. 9B

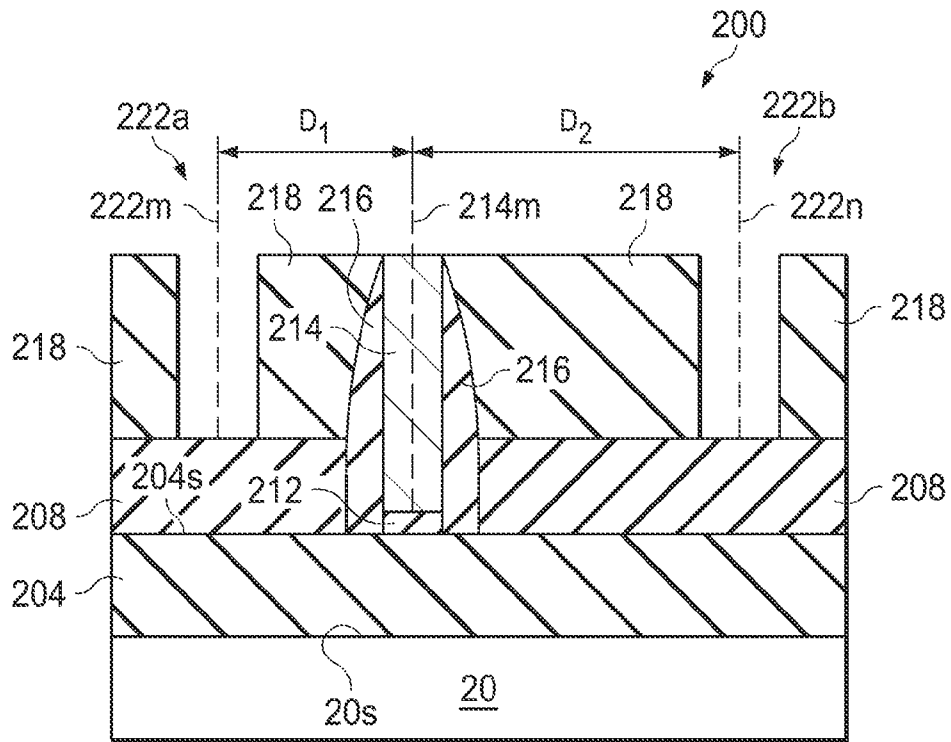


FIG. 9C

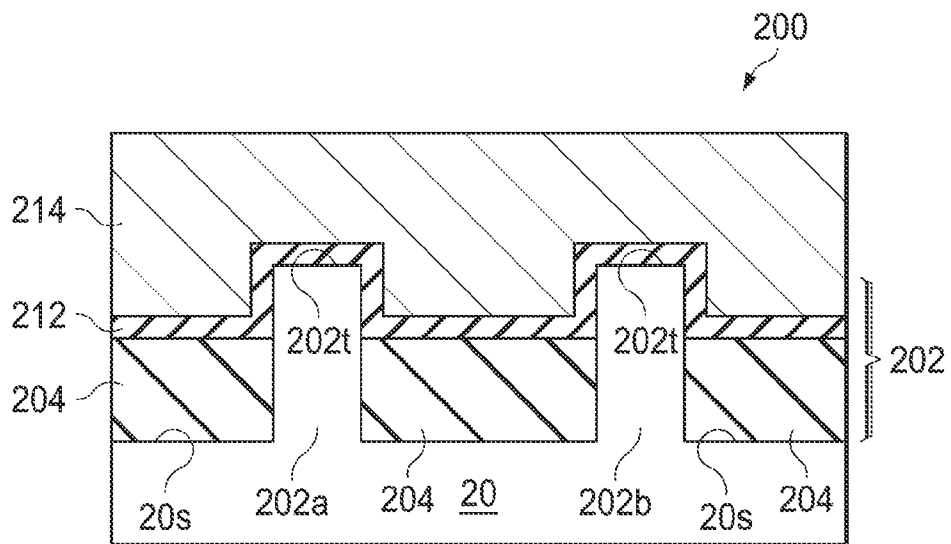


FIG. 10A

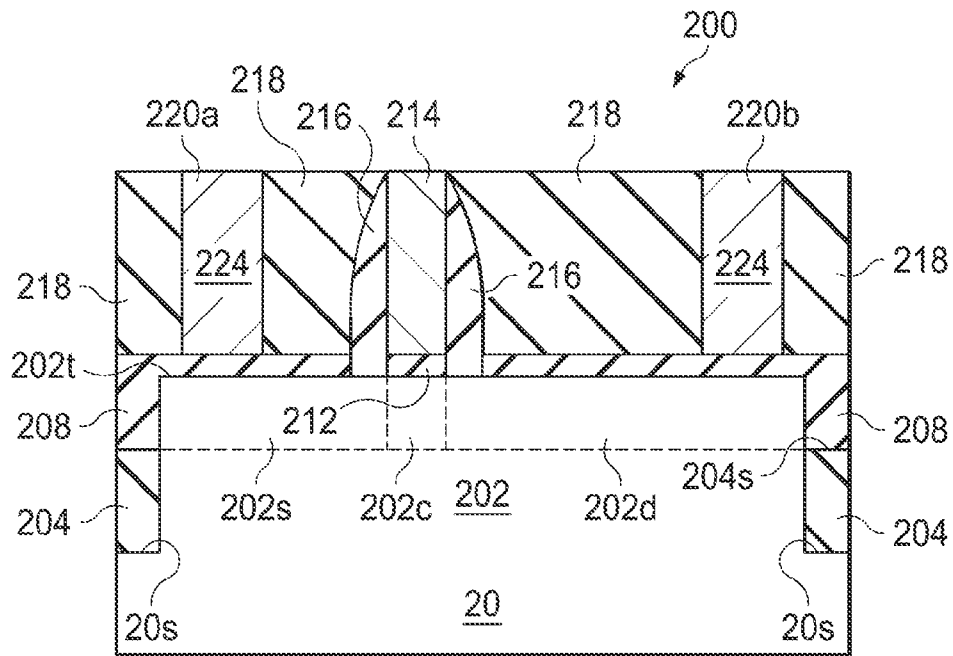


FIG. 10B

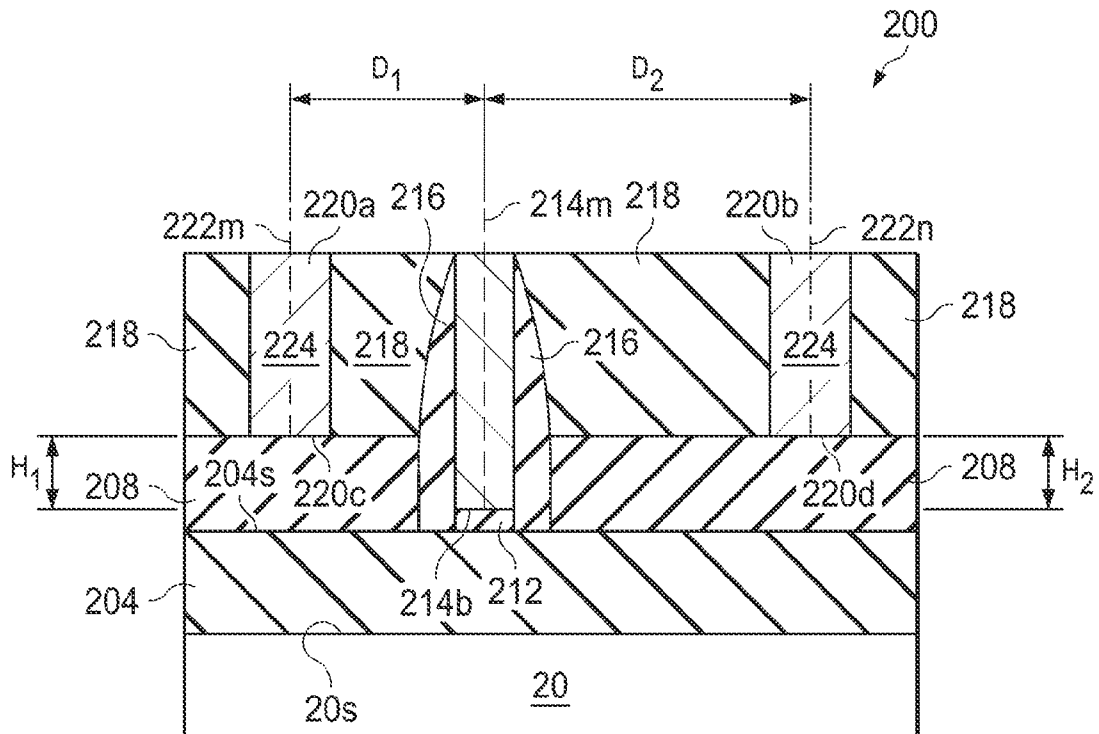


FIG. 10C

1

CONTACT STRUCTURE OF NON-PLANAR SEMICONDUCTOR DEVICE

TECHNICAL FIELD

This disclosure relates to integrated circuit fabrication, and more particularly to a semiconductor device with a contact structure.

BACKGROUND

As the semiconductor industry has progressed into nanometer technology process nodes in pursuit of higher device density, higher performance, and lower costs, challenges from both fabrication and design issues have resulted in the development of three-dimensional designs of a semiconductor device, such as a fin field effect transistor (FinFET). A typical FinFET is fabricated with a thin vertical “fin” (or fin structure) extending from a substrate formed by, for example, etching away a portion of a silicon layer of the substrate. The channel of the FinFET is formed in this vertical fin. A gate is provided over three sides (e.g., wrapping) the fin. Having a gate on both sides of the channel allows gate control of the channel from both sides. In addition, strained materials in source/drain (S/D) portions of the FinFET utilizing selectively grown silicon germanium may be used to enhance carrier mobility.

However, there are challenges to implementation of such features and processes in complementary metal-oxide-semiconductor (CMOS) fabrication. For example, parasitic capacitance between S/D contact structure and the gate significantly increases if the gate wraps the fin, thereby degrading the device performance.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure is best understood from the following detailed description when read with the accompanying figures. It is emphasized that, in accordance with the standard practice in the industry, various features are not drawn to scale and are used for illustration purposes only. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1 is a flowchart illustrating a method of fabricating a contact structure of a semiconductor device according to various aspects of the present disclosure;

FIG. 2 is a perspective view of a semiconductor device comprising a contact structure according to various aspects of the present disclosure; and

FIGS. 3A-10C are cross-section views of a semiconductor device comprising a contact structure at various stages of fabrication according to various aspects of the present disclosure.

DESCRIPTION

It is understood that the following disclosure provides many different embodiments, or examples, for implementing different features of the disclosure. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features,

2

such that the first and second features may not be in direct contact. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

Referring to FIG. 1, illustrated is a flowchart of a method 100 of fabricating a contact structure of a semiconductor device according to various aspects of the present disclosure.

The method 100 begins with step 102 in which a substrate is provided. The method 100 continues with step 104 in which a first fin of the substrate and a second fin of the substrate are formed extending above a major surface of the substrate, wherein the first fin and second fin comprise fin top surfaces.

The method 100 continues with step 106 in which an insulation region is formed above the substrate major surface between the first fin and second fin, wherein the insulation region comprises an insulation top surface lower than the fin top surfaces. The method 100 continues with step 108 in which a gate electrode layer is formed over channel portions of the first fin and the second fin and extending over a portion of the insulation region, wherein a portion of the gate electrode layer over the portion of insulation region comprises a gate middle line.

The method 100 continues with step 110 in which an inter-layer dielectric (ILD) layer surrounding the gate electrode layer is formed over the insulation region. The method 100 continues with step 112 in which a first opening and a second opening are formed in the ILD layer over the insulation region, wherein a distance between a middle line of the first opening and the gate middle line are different from a distance between a middle line of the second opening and the gate middle line. The method 100 continues with step 114 in which a metal layer is formed in the first opening to form a first contact structure and in the second opening to form a second contact structure. The discussion that follows illustrates embodiments of semiconductor devices that can be fabricated according to the method 100 of FIG. 1.

FIG. 2 is a perspective view of a semiconductor device 200 comprising a contact structure 220 according to various aspects of the present disclosure; and FIGS. 3A-10C are cross-section views of the semiconductor device 200 at various stages of fabrication according to various aspects of the present disclosure. Each figure denoted with a letter “A” shows an embodiment taken along line a-a (gate lengthwise) of FIG. 2; each figure denoted with a letter “B” shows an embodiment taken along line b-b (fin lengthwise) of FIG. 2; and each figure denoted with a letter “C” shows an embodiment taken along line c-c (between fins) of FIG. 2. As employed in the present disclosure, the term semiconductor device 200 refers to a fin field effect transistor (FinFET). The FinFET refers to any fin-based, multi-gate transistor. Other transistor structures and analogous structures are within the contemplated scope of the disclosure. The semiconductor device 200 may be included in a microprocessor, memory cell, and/or other integrated circuit (IC).

It is noted that, in some embodiments, the performance of the operations mentioned in FIG. 1 does not produce a completed semiconductor device 200. A completed semiconductor device 200 may be fabricated using complementary metal-oxide-semiconductor (CMOS) technology processing. Accordingly, it is understood that additional processes may be provided before, during, and/or after the method 100 of FIG. 1, and that some other processes may only be briefly described herein. Also, FIGS. 2 through 10B are simplified for a better understanding of the concepts of the present disclosure. For example, although the figures illustrate the

3

semiconductor device **200**, it is understood the IC may comprise a number of other devices comprising resistors, capacitors, inductors, fuses, etc.

FIG. **2** illustrates a semiconductor device **200** fabricated using the steps in FIG. **1**. The semiconductor device **200** comprises a FinFET (also referred to as a FinFET **200** hereafter). For illustration, the FinFET **200** comprises a fin structure **202** (comprising a first fin **202a** of the substrate **20** and a second fin **202b** of the substrate **20**), an insulation region **204** between the first fin **202a** and second fin **202b**, a gate electrode layer **214** traversing over the first fin **202a** and second fin **202b**, and a contact structure **220** on an epitaxial layer **208** adjacent to one side of the gate electrode layer **214**. In some embodiments, the FinFET **200** may comprise less than or greater than two fins, for example, one fin or three fins.

Referring to FIGS. **3A**, **3B**, and **3C**, and step **102** in FIG. **1**, a substrate **20** is provided. FIG. **3A** is a cross-section view of the FinFET **200** taken along the line a-a of FIG. **2** having a substrate at one of the various stages of fabrication according to an embodiment, FIG. **3B** is a cross-sectional view of FinFET **200** taken along the line b-b of FIG. **2**, and FIG. **3C** is a cross-sectional view of FinFET **200** taken along the line c-c of FIG. **2**.

In at least one embodiment, the substrate **20** comprises a crystalline silicon substrate (e.g., wafer). The substrate **20** may comprise various doped regions depending on design requirements (e.g., p-type substrate or n-type substrate). In some embodiments, the doped regions may be doped with p-type or n-type dopants. For example, the doped regions may be doped with p-type dopants, such as boron or BF_2 ; n-type dopants, such as phosphorus or arsenic; and/or combinations thereof. The doped regions may be configured for an n-type FinFET, or alternatively configured for a p-type FinFET.

The substrate **20** may alternatively be made of some other suitable elementary semiconductor, such as diamond or germanium; a suitable compound semiconductor, such as gallium arsenide, silicon carbide, indium arsenide, or indium phosphide; or a suitable alloy semiconductor, such as silicon germanium carbide, gallium arsenic phosphide, or gallium indium phosphide. Further, the substrate **20** may include an epitaxial layer (epi-layer), may be strained for performance enhancement, and/or may include a silicon-on-insulator (SOI) structure.

Still referring to FIGS. **3A**, **3B**, and **3C**, the structures in FIGS. **3A**, **3B**, and **3C** are produced by forming a fin structure **202** (comprising a first fin **202a** of the substrate **20** and a second fin **202b** of the substrate **20**) extending above a major surface **20s** of the substrate **20** comprising fin top surfaces **202t** (step **104** in FIG. **1**). In some embodiments, the fin structure **202** may further comprise a capping layer (not shown) disposed on the fins, which may be a silicon-capping layer.

The fin structure **202** is formed using any suitable process comprising various deposition, photolithography, and/or etching processes. An exemplary photolithography process may include forming a photo-sensitive layer overlying the substrate **20** (e.g., on a silicon layer), exposing the photo-sensitive layer to a pattern, performing a post-exposure bake process, and developing the photo-sensitive layer to form a masking element including the photo-sensitive layer. The silicon layer may then be etched using reactive ion etching (RIE) processes and/or other suitable processes to form trenches **206a** with a major surface **20s** of the substrate **20**. Each portion of the substrate **20** between trenches **206a** forms one semiconductor fin. In the depicted embodiment, the fin structure **202** (comprising the first fin **202a** of the substrate **20** and the second fin **202b** of the substrate **20**) extends above the

4

major surface **20s** of the substrate **20** comprising the fin top surfaces **202t**. The photo-sensitive layer is then removed. Next, a cleaning may be performed to remove a native oxide of the semiconductor substrate **20**. The cleaning may be performed using diluted hydrofluoric (DHF) acid.

Liner oxide (not shown) is then optionally formed in the trenches **206a**. In an embodiment, liner oxide may be a thermal oxide having a thickness ranging from about 20 Å to about 500 Å. In some embodiments, liner oxide may be formed using in-situ steam generation (ISSG) and the like. The formation of liner oxide rounds corners of the trenches **206a**, which reduces the electrical fields, and hence improves the performance of the resulting integrated circuit.

FIG. **4A** is a cross-section view of the FinFET **200** taken along the line a-a of FIG. **2** at one of the various stages of fabrication according to an embodiment, FIG. **4B** is a cross-sectional view of FinFET **200** taken along the line b-b of FIG. **2**, and FIG. **4C** is a cross-sectional view of FinFET **200** taken along the line c-c of FIG. **2**. The structure in FIGS. **4A**, **4B**, and **4C** are produced by forming an insulation region **204** above the substrate major surface **20s** between the first fin **202a** and second fin **202b** comprising an insulation top surface **204s** lower than the fin top surfaces **202t** (step **106** in FIG. **1**).

In the depicted embodiment, the trenches **22** are filled with a dielectric material to form the isolation regions **204** to define and electrically isolate the various fins of the fin structure **202**. In one example, the isolation regions **204** include shallow trench isolation (STI) regions. The isolation regions **204** comprise silicon oxide, silicon nitride, silicon oxynitride, fluoride-doped silicate glass (FSG), a low-K dielectric material, and/or combinations thereof. The isolation regions **204**, and in the present embodiment, the STI regions **204**, may be formed by any suitable process. As one example, the formation of the STI regions **204** may include filling trenches between the fins (for example, using a chemical vapor deposition process) with a dielectric material. In some embodiments, the filled trench may have a multi-layer structure such as a thermal oxide liner layer filled with silicon nitride or silicon oxide.

A chemical mechanical polish is then performed until the top surface of the fin structure **202** is exposed or reached, followed by recessing the dielectric material by an etching step, resulting in recesses **206b** to expose upper portions **202u** of the fin structure **202** to form the isolation regions **204**. Each of the upper portions **202u** of the fin structure **202** comprises two source/drain (S/D) portions **202s**, **202d** and a channel portion **202c** between the two S/D regions **202s**, **202d**. As such, the insulation region **204** is above the substrate major surface **20s** between the first fin **202a** and second fin **202b** comprising an insulation top surface **204s** lower than the fin top surfaces **202t**. In one embodiment, the etching step may be performed using a wet etching process, for example, by dipping the substrate **202** in hydrofluoric acid (HF). In another embodiment, the etching step may be performed using a dry etching process, for example, the dry etching process may be performed using CHF_3 or BF_3 as etching gases.

As shown in FIGS. **5A**, **5B**, and **5C**, after formation of the isolation regions **204**, the structures in FIGS. **5A**, **5B**, and **5C** are produced by forming a gate electrode layer **214** over channel portions **202c** of the first fin **202a** and the second fin **202b** and extending over a portion of the insulation region **204**, wherein a portion of the gate electrode layer **214** over the portion of insulation region **204** comprises a gate middle line **214m** (step **108** in FIG. **1**). FIG. **5A** is a cross-section view of the FinFET **200** taken along the line a-a of FIG. **2** at one of the

5

various stages of fabrication according to an embodiment, FIG. 5B is a cross-sectional view of FinFET 200 taken along the line b-b of FIG. 2, and FIG. 5C is a cross-sectional view of FinFET 200 taken along the line c-c of FIG. 2.

In some embodiments, the gate electrode layer 214 is over a gate dielectric layer 212. The gate electrode layer 214 and the gate dielectric layer 212 form a gate stack 210. In some embodiments, a pair of sidewall spacers 216 is formed on two sides of the gate stack 210. In the depicted embodiment, the gate stack 210 may be formed using any suitable process, including the processes described herein.

In one example, the gate dielectric layer 212 and gate electrode layer 214 are sequentially deposited over the substrate 20. In some embodiments, the gate dielectric layer 212 may include silicon oxide, silicon nitride, silicon oxy-nitride, or high dielectric constant (high-k) dielectric. High-k dielectrics comprise metal oxides. Examples of metal oxides used for high-k dielectrics include oxides of Li, Be, Mg, Ca, Sr, Sc, Y, Zr, Hf, Al, La, Ce, Pr, Nd, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu and mixtures thereof. In the present embodiment, the gate dielectric layer 212 is a high-k dielectric layer with a thickness in the range of about 10 angstroms to about 30 angstroms. The gate dielectric layer 212 may be formed using a suitable process such as atomic layer deposition (ALD), chemical vapor deposition (CVD), physical vapor deposition (PVD), thermal oxidation, UV-ozone oxidation, or combinations thereof. The gate dielectric layer 212 may further comprise an interfacial layer (not shown) to reduce damage between the gate dielectric layer 212 and the fin structure 202. The interfacial layer may comprise silicon oxide.

In some embodiments, the gate electrode layer 214 may comprise a single-layer or multilayer structure. In at least one embodiment, the gate electrode layer 214 comprises polysilicon. Further, the gate electrode layer 214 may be doped poly-silicon with the uniform or non-uniform doping. In an alternative embodiment, the gate electrode layer 214 comprises N-work function metal. The N-work function metal comprises a metal selected from a group of W, Cu, Ti, Ag, Al, TiAl, TiAlN, TaC, TaCN, TaSiN, Mn, and Zr. In an alternative embodiment, the gate electrode layer 214 comprises P-work function metal. The P-work function metal comprises a metal selected from a group of TiN, WN, TaN, and Ru. In the present embodiment, the gate electrode layer 214 comprises a thickness in the range of about 30 nm to about 60 nm. The gate electrode layer 214 may be formed using a suitable process such as ALD, CVD, PVD, plating, or combinations thereof.

Then, a layer of photoresist (not shown) is formed over the gate electrode layer 214 by a suitable process, such as spin-on coating, and patterned to form a patterned photoresist feature by a proper lithography patterning method. In at least one embodiment, a width of the patterned photoresist feature is in the range of about 5 nm to about 45 nm. The patterned photoresist feature can then be transferred using a dry etching process to the underlying layers (i.e., the gate electrode layer 214 and the gate dielectric layer 212) to form the gate stack 210. The photoresist layer may be stripped thereafter.

Still referring to FIGS. 5A, 5B, and 5C, the FinFET 200 further comprises a dielectric layer formed over the gate stack 210 and the substrate 20 and covering sidewalls of the gate stack 210. The dielectric layer may include silicon oxide, silicon nitride, or silicon oxy-nitride. The dielectric layer may comprise a single layer or multilayer structure. The dielectric layer may be formed by CVD, PVD, ALD, or other suitable technique. The dielectric layer comprises a thickness ranging from about 5 nm to about 15 nm. Then, an anisotropic etching is performed on the dielectric layer to form the pair of sidewall spacers 216 on two sides of the gate stack 210.

6

FIG. 6A is a cross-section view of the FinFET 200 taken along the line a-a of FIG. 2 at one of the various stages of fabrication according to an embodiment, FIG. 6B is a cross-sectional view of FinFET 200 taken along the line b-b of FIG. 2, and FIG. 6C is a cross-sectional view of FinFET 200 taken along the line c-c of FIG. 2. As depicted in FIGS. 6A, 6B, and 6C, after forming the gate electrode layer 214, the optional structures in FIGS. 6A, 6B, and 6C are produced by epitaxially growing a strained material 208 on the S/D portions 202s, 202d of the fins 202 and extending over the insulation region 204, wherein a lattice constant of the strained material 208 is different from a lattice constant of the substrate 20. Thus, the channel portion 202c of the FinFET 200 is strained or stressed to enhance carrier mobility of the device.

In some embodiments, the strained material 208 comprises Si, Ge, SiGe, SiC, SiP, or III-V semiconductor material. In the depicted embodiment, a pre-cleaning process may be performed to clean the S/D portions 202s, 202d with HF or other suitable solution. Then, the strained material 208 such as silicon germanium (SiGe) is selectively grown by a low-pressure CVD (LPCVD) process on the S/D portions 202s, 202d. In the depicted embodiment, the LPCVD process is performed at a temperature of about 400 to about 800° C. and under a pressure of about 1 to about 15 Torr, using SiH₂Cl₂, HCl, GeH₄, B₂H₆, and H₂ as reaction gases.

As depicted in FIGS. 7A, 7B, and 7C, and step 110 in FIG. 1, for fabricating a contact structure (such as a contact structure 220 shown in FIG. 10) of the FinFET 200, the structures in FIGS. 7A, 7B, and 7C are produced by forming an inter-layer dielectric (ILD) layer 218 surrounding the gate electrode layer 214 (and the pair of sidewall spacers 216) over the insulation region 204, and extending over the two source/drain (S/D) portions 202s, 202d. FIG. 7A is a cross-section view of the FinFET 200 taken along the line a-a of FIG. 2 at one of the various stages of fabrication according to an embodiment, FIG. 7B is a cross-sectional view of FinFET 200 taken along the line b-b of FIG. 2, and FIG. 7C is a cross-sectional view of FinFET 200 taken along the line c-c of FIG. 2.

The ILD layer 218 comprises a dielectric material. The dielectric material may comprise silicon oxide, silicon nitride, silicon oxynitride, phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), spin-on glass (SOG), fluorinated silica glass (FSG), carbon doped silicon oxide (e.g., SiCOH), and/or combinations thereof. In some embodiments, the ILD layer 218 may be formed over the strained material 208 by CVD, high density plasma (HDP) CVD, sub-atmospheric CVD (SACVD), spin-on, sputtering, or other suitable methods. In the present embodiment, the ILD layer 218 has a thickness in the range of about 4000 Å to about 8000 Å. It is understood that the ILD layer 218 may comprise one or more dielectric materials and/or one or more dielectric layers.

Subsequently, the ILD layer 218 is planarized using a CMP process until a top surface 214s of the gate electrode layer 214 is exposed or reached (shown in FIGS. 8A, 8B, and 8C). The CMP process has a high selectivity to provide a substantially planar surface for the gate electrode layer 214 and ILD layer 218. FIG. 8A is a cross-section view of the FinFET 200 taken along the line a-a of FIG. 2 at one of the various stages of fabrication according to an embodiment, FIG. 8B is a cross-sectional view of FinFET 200 taken along the line b-b of FIG. 2, and FIG. 8C is a cross-sectional view of FinFET 200 taken along the line c-c of FIG. 2.

The process steps up to this point have provided the substrate 20 having the ILD layer 218 over the two S/D portions 202s, 202d. In some applications, two symmetrical S/D con-

7

tact structures on two sides of the gate electrode layer **214** are formed through the ILD layer **218** to provide electrical contacts to the S/D portions **202s**, **202d** of the FinFET **200**. However, if the gate electrode layer **214** wraps the fin **202** and has a design-rule distance to the two symmetrical S/D contact structures, parasitic capacitance between the S/D contact structures and the gate electrode layer **214** significantly increases and thus degrades the device performance.

Accordingly, the processing discussed below with reference to FIGS. **9A-10C** may form two asymmetrical S/D contact structures on two sides of the gate electrode layer **214** to replace the two symmetrical S/D contact structures on two sides of the gate electrode layer **214**. Thus, a distance between the gate electrode layer **214** and one of the two asymmetrical S/D contact structures is the design-rule distance if increased parasitic capacitance is acceptable, while a distance between the gate electrode layer **214** and another one of the two asymmetrical S/D contact structures is greater than the design-rule distance, resulting in lower parasitic capacitance if increased parasitic capacitance is unacceptable, thereby enhancing the device performance.

Subsequent CMOS processing steps applied to the FinFET **200** of FIGS. **8A**, **8B**, and **8C** comprise forming contact openings through the ILD layer **218** to provide electrical contacts to the S/D portions **202s**, **202d** of the FinFET **200**. Referring to FIGS. **9A**, **9B**, and **9C**, the structures in FIGS. **9A**, **9B**, and **9C** are produced by forming openings **222** (comprising a first opening **222a** and a second opening **222b**) in the ILD layer **218** over the insulation region **204**, wherein a first distance D_1 (i.e., design-rule distance) between a middle line **222m** of the first opening **222a** and the gate middle line **214m** is different from a second distance D_2 between a middle line **222n** of the second opening **222b** and the gate middle line **214m** (step **112** in FIG. **1**). FIG. **9A** is a cross-section view of the FinFET **200** taken along the line a-a of FIG. **2** at one of the various stages of fabrication according to an embodiment, FIG. **9B** is a cross-sectional view of FinFET **200** taken along the line b-b of FIG. **2**, and FIG. **9C** is a cross-sectional view of FinFET **200** taken along the line c-c of FIG. **2**.

As one example, the formation of the openings **222** includes forming a layer of photoresist (not shown) over the ILD layer **218** by a suitable process, such as spin-on coating, patterning the layer of photoresist to form a patterned photoresist feature by a proper lithography method, etching the exposed ILD layer **218** (for example, by using a dry etching, wet etching, and/or plasma etching process) to remove portions of the ILD layer **218** to expose a portion of the strained material **208** over the insulation regions **204**. The patterned photoresist layer may be stripped thereafter.

FIG. **10A** is a cross-section view of the FinFET **200** taken along the line a-a of FIG. **2** at one of the various stages of fabrication according to an embodiment, FIG. **10B** is a cross-sectional view of FinFET **200** taken along the line b-b of FIG. **2**, and FIG. **10C** is a cross-sectional view of FinFET **200** taken along the line c-c of FIG. **2**. Referring to FIGS. **10A**, **10B**, and **10C**, and step **114** in FIG. **1**, after formation of the openings **222** in the ILD layer **218**, the structures in FIGS. **10A**, **10B**, and **10C** are produced by forming a metal layer **224** in the first opening **222a** to form a first contact structure **220a** and in the second opening **222b** to form a second contact structure **220b**. The first contact structure **220a** and second contact structure **220b** are combined and referred as the contact structure **220**.

In some embodiments, the metal layer **224** comprises W, Al, or Cu. In some embodiments, the metal layer **224** may be formed by CVD, PVD, plating, ALD, or other suitable technique. In some embodiment, the metal layer **224** may comprise a laminate. The laminate may further comprise a barrier

8

metal layer, a linear metal layer or a wetting metal layer. Further, the thickness of the metal layer **224** will depend on the depth of the openings **222**. The metal layer **224** is thus deposited until the openings **222** are substantially filled or over-filled. Then, another CMP is performed to remove a portion of the metal layer **224** outside of the openings **222**, the CMP process may stop when reaching the ILD layer **218**, and thus providing a substantially planar surface.

In some embodiments, the semiconductor device **200** comprises the insulation region **204** over the substrate **20**; the gate electrode layer **214** over the insulation region **204** comprising the gate middle line **214m**; the first contact structure **220a** over the insulation region **204** adjacent to the gate electrode layer **214** comprising the first middle line **222m**, wherein the first middle line **222m** and the gate middle line **214m** has the first distance D_1 ; and the second contact structure **220b** over the insulation region **204** on a side of the gate electrode layer **214** opposite to the first contact structure **220a** comprising the second middle line **222n**, wherein the second middle line **222n** and the gate middle line **214m** has the second distance D_2 greater than the first distance D_1 .

In some embodiments, the FinFET **200** comprises the substrate **20** comprising the major surface **20s**; the first fin **202a** of the substrate **20** and the second fin **202b** of the substrate **20** extending above the substrate major surface **20s** comprising fin top surfaces **202t**; the insulation region **204** above the substrate major surface **20s** between the first fin **202a** and second fin **202b** comprising the insulation top surface **204s** lower than the fin top surfaces **202t**; the gate electrode layer **214** over the first fin **202a** and the second fin **202b** and extending over insulation region **204**, wherein the portion of the gate electrode layer **214** over insulation region **204** comprises the gate middle line **214m**; the first contact structure **220a** over the insulation region **204** adjacent to the gate electrode layer **214** comprising the first middle line **222m**, wherein the first middle line **222m** and the gate middle line **214m** has a first distance D_1 ; and the second contact structure **220b** over the insulation region **204** on a side of the gate electrode layer **214** opposite to the first contact structure **220a** comprising the second middle line **222n**, wherein the second middle line **222n** and the gate middle line **214m** has a second distance D_2 greater than the first distance D_1 .

In some embodiments, a ratio of the second distance D_2 to the first distance D_1 is from about 1.1 to about 5. In some embodiments, the gate electrode layer **214** comprises a gate bottom surface **214b** and the first contact structure **220a** comprises a first bottom surface **220c** higher than the gate bottom surface **214b**, wherein a first height H_1 between the first bottom surface **220c** and the gate bottom surface **214b** is in the range of about 1 to about 50 nm. In some embodiments, the gate electrode layer **214** comprises a gate bottom surface **214b** and the second contact structure **220b** comprises a second bottom surface **220d** higher than the gate bottom surface **214b**, wherein a second height H_2 between the second bottom surface **220d** and the gate bottom surface **214b** is in the range of about 1 to about 50 nm. In some embodiments, a semiconductor layer (i.e. the strained material **208**) is between the first contact structure **220a** and the insulation region **204**.

In the depicted embodiment, the gate stack **210** is fabricated using a gate-first process. In an alternative embodiment, the gate stack **210** may be fabricated using a gate-last process performed by first forming a dummy gate stack. In some embodiments, the gate-last process comprises forming an ILD layer surrounding the dummy gate stack, removing a dummy gate electrode layer to form a trench in the ILD layer, then fill the trench with a conductive gate electrode layer. In some embodiments, the gate-last process comprises forming

9

an ILD layer surrounding the dummy gate stack, removing a dummy gate electrode layer and a dummy gate dielectric layer to form a trench in the ILD layer, then fill the trench with a gate dielectric layer and a conductive gate electrode layer.

After the steps shown in FIG. 1, as further illustrated with respect to the example depicted in FIGS. 3A-10C, have been performed, subsequent processes, comprising interconnect processing, are performed to complete the FinFET 200 fabrication. It has been observed that the second middle line 222n and the gate middle line 214m has the second distance D₂ greater than the first distance D₁ (i.e., the design-rule distance), resulting in lower parasitic capacitance and enhancing the device performance.

In accordance with embodiments, a semiconductor device comprises an insulation region over a substrate; a gate electrode layer over the insulation region comprising a gate middle line; a first contact structure over the insulation region adjacent to the gate electrode layer comprising a first middle line, wherein the first middle line and the gate middle line has a first distance; and a second contact structure over the insulation region on a side of the gate electrode layer opposite to the first contact structure comprising a second middle line, wherein the second middle line and the gate middle line has a second distance greater than the first distance.

In accordance with another embodiment, a fin field effect transistor (FinFET) comprises a substrate comprising a major surface; a first fin of the substrate and a second fin of the substrate extending above the substrate major surface comprising fin top surfaces; an insulation region above the substrate major surface between the first fin and second fin comprising an insulation top surface lower than the fin top surfaces; a gate electrode layer over the first fin and the second fin and extending over insulation region, wherein a portion of the gate electrode layer over insulation region comprises a gate middle line; a first contact structure over the insulation region adjacent to the gate electrode layer comprising a first middle line, wherein the first middle line and the gate middle line has a first distance; and a second contact structure over the insulation region on a side of the gate electrode layer opposite to the first contact structure comprising a second middle line, wherein the second middle line and the gate middle line has a second distance greater than the first distance.

In accordance with another embodiment, a method of fabricating a semiconductor device comprises providing a substrate; forming a first fin of the substrate and a second fin of the substrate extending above a major surface of the substrate comprising fin top surfaces; forming an insulation region above the substrate major surface between the first fin and second fin comprising an insulation top surface lower than the fin top surfaces; forming a gate electrode layer over channel portions of the first fin and the second fin and extending over a portion of the insulation region, wherein a portion of the gate electrode layer over the portion of insulation region comprises a gate middle line; forming an inter-layer dielectric (ILD) layer surrounding the gate electrode layer over the insulation region; forming a first opening and a second opening in the ILD layer over the insulation region, wherein a distance between a middle line of the first opening and the gate middle line is different from a distance between a middle line of the second opening and the gate middle line; and forming a metal layer in the first opening to form a first contact structure and in the second opening to form a second contact structure.

While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodi-

10

ments. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. A semiconductor device comprising:

a fin formed over a substrate, the fin having an elongated axis running in a first direction;

an insulation region over the substrate, wherein a first portion of the fin is embedded in the insulation region and a second portion of the fin extends above a top surface of the insulation region;

a gate electrode layer over the insulation region and the fin; a first gate spacer on a first side of the gate electrode layer and on the fin;

a second gate spacer on a second side of the gate electrode layer opposite from the first side of the gate electrode layer, the second gate spacer being on the fin;

a source region in the fin at the first gate spacer and extending laterally away from the gate electrode layer;

a drain region in the fin at the second gate spacer and extending laterally away from the gate electrode layer;

a first contact structure to the source region, the first contact structure comprising a first conductive plug extending through an insulating layer formed over the fin and over the insulation region, wherein the first conductive plug includes a first portion aligned with the elongated axis of the fin and a second portion laterally displaced from the elongated axis of the fin in a direction orthogonal to the elongated axis of the fin and extending over the insulating region, wherein a first distance is between a first middle line of the second portion of the first contact structure and a gate middle line of the gate electrode layer, the source region having a uniform dopant concentration from the first gate spacer to the first contact structure; and

a second contact structure to the drain region, the second contact structure comprising a second conductive plug extending through the insulating layer formed over the fin and over the insulation region, wherein the second conductive plug includes a third portion aligned with the elongated axis of the fin and a fourth portion laterally displaced from the elongated axis of the fin in a direction orthogonal to the elongated axis of the fin, the fourth portion over the insulation region on a side of the gate electrode layer opposite to the first contact structure, wherein a second distance is between a second middle line of the fourth portion of the second contact structure and the gate middle line of the gate electrode layer, and the second distance is greater than the first distance, the drain region having a uniform dopant concentration from the second gate spacer to the second contact structure.

2. The semiconductor device of claim 1, wherein a ratio of the second distance to the first distance is from about 1.1 to about 5.

3. The semiconductor device of claim 1, wherein the gate electrode layer comprises a gate bottom surface and the first contact structure comprises a first bottom surface higher than the gate bottom surface.

4. The semiconductor device of claim 3, wherein a first height between the first bottom surface and the gate bottom surface is in a range of about 1 nm to about 50 nm.

5. The semiconductor device of claim 1, wherein the gate electrode layer comprises a gate bottom surface and the sec-

11

ond contact structure comprises a second bottom surface higher than the gate bottom surface.

6. The semiconductor device of claim 5, wherein a second height between the second bottom surface and the gate bottom surface is in a range of about 1 nm to about 50 nm.

7. The semiconductor device of claim 1, further comprising a semiconductor layer between the first contact structure and the insulation region.

8. The semiconductor device of claim 1, wherein the gate electrode layer comprises P-work function metal or N-work function metal.

9. The semiconductor device of claim 1, wherein the first contact structure comprises W, Al, or Cu.

10. A method of fabricating a semiconductor device comprising:

forming a first fin of a substrate and a second fin of the substrate extending above a major surface of the substrate comprising respective fin top surfaces;

forming an insulation region above the major surface of the substrate between the first fin and the second fin comprising an insulation top surface lower than the fin top surfaces;

forming a gate electrode layer over channel portions of the first fin and the second fin and extending over a portion of the insulation region;

forming a first gate spacer and a second gate spacer on a first side and a second side of the gate electrode layer, respectively, the first gate spacer extending over the first fin and the second fin, the second gate spacer extending over the first fin, and the second fin, the first side of the gate electrode layer being opposite from the second side of the gate electrode layer;

forming respective source regions in the first fin and the second fin at the first gate spacer and extending laterally away from the gate electrode layer, and respective drain regions in the first fin and the second fin at the second gate spacer and extending laterally away from the gate electrode layer;

forming an inter-layer dielectric (ILD) layer surrounding the gate electrode layer over the insulation region;

forming a first opening and a second opening in the ILD layer over the insulation region, the first opening being over the respective source regions, the second opening being over the respective drain regions, wherein a distance between a middle line of the first opening and a gate middle line of the gate electrode layer is less than a distance between a middle line of the second opening and the gate middle line of the gate electrode layer; and

forming a metal layer in the first opening to form a first contact structure to the respective source regions and in the second opening to form a second contact structure to the respective drain regions, the respective source regions having a uniform dopant concentration from the first gate spacer to the first contact structure, the respective drain regions having a uniform dopant concentration from the second gate spacer to the second contact structure.

11. The method of claim 10, further comprising:

epi-growing a strained material on the respective drain regions of the first fin and the second fin and extending over the insulation region after forming the gate electrode layer, wherein a lattice constant of the strained material is different from a lattice constant of the substrate.

12. A method of fabricating a semiconductor device comprising:

12

forming a first trench and a second trench in a substrate, a portion of the substrate between the first trench and the second trench forming a fin;

forming an insulation region in the first trench, a top surface of the insulation region being lower than a top surface of the fin;

forming a gate electrode layer over a channel portion of the fin, the gate electrode layer extending over the insulation region;

forming a first gate spacer and a second gate spacer on a first side and a second side of the gate electrode layer, respectively, the first gate spacer extending over the fin, the second gate spacer extending over the fin, the first side of the gate electrode layer being opposite from the second side of the gate electrode layer;

forming a drain region in the fin at the first gate spacer and extending laterally away from the gate electrode layer, and a source region in the fin at the second gate spacer and extending laterally away from the gate electrode layer;

forming an inter-layer dielectric (ILD) layer surrounding the gate electrode layer and over the insulation region;

forming a first opening in the ILD layer over the insulation region and over the drain region in the fin, and a second opening in the ILD layer over the insulation region and over the source region in the fin, wherein a first distance between a middle line of the first opening and a gate middle line of the gate electrode layer is greater than a second distance between a middle line of the second opening and the gate middle line of the gate electrode layer; and

depositing a metallic material in the first opening to form a first contact structure to the drain region, and in the second opening to form a second contact structure to the source region, the drain region having a uniform dopant concentration from the first gate spacer to the first contact structure, the source region having a uniform dopant concentration from the second gate spacer to the second contact structure.

13. The method of claim 12, wherein a ratio of the first distance to the second distance is from about 1.1 to about 5.

14. The method of claim 12, further comprising epitaxially growing a first strained material over the drain region of the fin and a second strained material over the source region of the fin after forming the gate electrode layer, the first strained material and the second strained material each extending over the insulation region, wherein a lattice constant of the first strained material and a lattice constant of the second strained material is different from a lattice constant of the substrate.

15. The method of claim 14, wherein the first strained material is interposed between the drain region of the fin and the first contact structure.

16. The method of claim 14, wherein the first strained material is interposed between the insulation region and the first contact structure.

17. The method of claim 14, wherein the first gate spacer is interposed between the gate electrode layer and the first strained material.

18. The method of claim 12, wherein the gate electrode layer comprises P-work function metal or N-work function metal.

19. The method of claim 12, further comprising forming a gate dielectric layer over the channel portion of the fin before forming the gate electrode layer.

* * * * *