US006853690B1

(12) **United States Patent**
Sorrells et al.

(10) **Patent No.: US 6,853,690 B1**
(45) **Date of Patent: Feb. 8, 2005**

(54) **METHOD, SYSTEM AND APPARATUS FOR BALANCED FREQUENCY UP-CONVERSION OF A BASEBAND SIGNAL AND 4-PHASE RECEIVER AND TRANSCEIVER EMBODIMENTS**

(75) Inventors: **David F. Sorrells**, Jacksonville, FL (US); **Michael J. Bultman**, Jacksonville, FL (US); **Robert W. Cook**, Switzerland, FL (US); **Richard C. Looke**, Jacksonville, FL (US); **Charley D. Moses, Jr.**, Jacksonville, FL (US); **Gregory S. Rawlins**, Lake Mary, FL (US); **Michael W. Rawlins**, Lake Mary, FL (US)

(73) Assignee: **ParkerVision, Inc.**, Jacksonville, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/525,615**

(22) Filed: **Mar. 14, 2000**

Related U.S. Application Data

(60) Provisional application No. 60/177,381, filed on Jan. 24, 2000, provisional application No. 60/171,502, filed on Dec. 22, 1999, provisional application No. 60/177,705, filed on Jan. 24, 2000, provisional application No. 60/129,839, filed on Apr. 16, 1999, provisional application No. 60/158,047, filed on Oct. 7, 1999, provisional application No. 60/171,349, filed on Dec. 21, 1999, provisional application No. 60/177,702, filed on Jan. 24, 2000, provisional application No. 60/180,667, filed on Feb. 7, 2000, and provisional application No. 60/171,496, filed on Dec. 22, 1999.

(51) **Int. Cl.**[7] **H04L 27/04**; H04L 27/12; H04L 27/20

(52) **U.S. Cl.** **375/295**; 375/298; 375/259; 375/256; 455/76; 455/91

(58) **Field of Search** 375/295–296, 375/298, 309–312, 256, 259, 268; 455/118, 323, 313, 76, 91

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,132,952 A 1/1979 Hongu et al.

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

DE 196 48 915 A1 6/1998

OTHER PUBLICATIONS

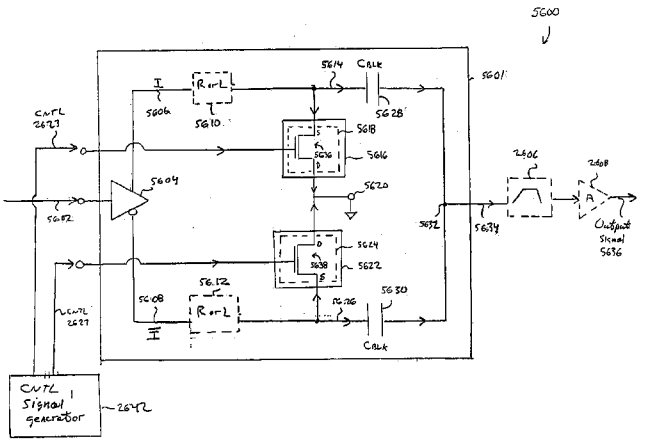
Simoni, A. et al., "A Single–Chip Optical Sensor with Analog Memory for Motion Detection," *IEEE Journal of Solid–State Circuits,* IEEE, vol. 30, No. 7, pp. 800–806 (Jul. 1995).

(List continued on next page.)

Primary Examiner—Phuong Phu
(74) *Attorney, Agent, or Firm*—Sterne, Kessler, Goldstein & Fox PLLC

(57) **ABSTRACT**

A balanced transmitter up-converts a baseband signal directly from baseband-to-RF. The up-conversion process is sufficiently linear that no IF processing is required, even in communications applications that have stringent requirements on spectral growth. In operation, the balanced modulator sub-harmonically samples the baseband signal in a balanced and differential manner, resulting in harmonically rich signal. The harmonically rich signal contains multiple harmonic images that repeat at multiples of the sampling frequency, where each harmonic contains the necessary information to reconstruct the baseband signal. The differential sampling is performed according to a first and second control signals that are phase shifted with respect to each other. In embodiments of the invention, the control signals have pulse widths (or apertures) that operate to improve energy transfer to a desired harmonic in the harmonically rich signal. A bandpass filter can then be utilized to select the desired harmonic of interest from the harmonically rich signal. The sampling modules that perform the sampling can



MEDIATEK-1023
7,483,686

be configured in either a series or a shunt configuration. In embodiments of the invention, DC offset voltages are minimized between the sampling modules to minimize or prevent carrier insertion into the harmonic images.

5 Claims, 134 Drawing Sheets

U.S. PATENT DOCUMENTS

4,250,458	A		2/1981	Richmond et al.
4,441,080	A		4/1984	Saari
4,510,467	A		4/1985	Chang et al.
4,761,798	A		8/1988	Griswold, Jr. et al.
4,772,853	A		9/1988	Hart
4,873,492	A		10/1989	Myer
4,972,436	A		11/1990	Halim et al.
5,012,245	A		4/1991	Scott et al.
5,058,107	A		10/1991	Stone et al.
5,179,731	A		1/1993	Trankle et al.
5,218,562	A		6/1993	Basehore et al.
5,239,496	A		8/1993	Vancraeynest
5,260,973	A	*	11/1993	Watanabe 375/295
5,282,222	A		1/1994	Fattouche et al.
5,345,239	A		9/1994	Madni et al.
5,422,909	A		6/1995	Love et al.
5,440,311	A		8/1995	Gallagher et al.
5,481,570	A		1/1996	Winters
5,490,176	A		2/1996	Peltier
5,589,793	A		12/1996	Kassapian
5,636,140	A		6/1997	Lee et al.
5,678,226	A		10/1997	Li et al.
5,682,099	A		10/1997	Thompson et al.
5,697,074	A		12/1997	Makikallio et al.
5,745,846	A		4/1998	Myer et al.
5,757,858	A		5/1998	Black et al.
5,760,629	A		6/1998	Urabe et al.
5,760,632	A		6/1998	Kawakami et al.
5,784,689	A		7/1998	Kobayashi
5,834,979	A		11/1998	Yatsuka
5,896,304	A		4/1999	Tiemann et al.
5,926,513	A		7/1999	Suominen et al.
5,949,827	A		9/1999	DeLuca et al.
5,955,992	A		9/1999	Shattil
5,970,053	A		10/1999	Schick et al.
5,982,315	A		11/1999	Bazarjani et al.
5,995,030	A		11/1999	Cabler
5,999,561	A		12/1999	Naden et al.
6,005,903	A		12/1999	Mendelovicz
6,014,176	A		1/2000	Nayebi et al.
6,018,262	A		1/2000	Noro et al.
6,018,553	A		1/2000	Sanielevici et al.
6,031,217	A		2/2000	Aswell et al.
6,047,026	A		4/2000	Chao et al.
6,049,573	A		4/2000	Song
6,064,054	A		5/2000	Waczynski et al.
6,067,329	A		5/2000	Kato et al.
6,076,015	A		6/2000	Hartley et al.
6,078,630	A		6/2000	Prasanna
6,084,465	A		7/2000	Dasgupta
6,091,940	A	*	7/2000	Sorrells et al. 455/118
6,094,084	A		7/2000	Abou-Allam et al.
6,144,331	A		11/2000	Jiang
6,151,354	A		11/2000	Abbey
6,160,280	A		12/2000	Bonn et al.
6,169,733	B1		1/2001	Lee
6,204,789	B1		3/2001	Nagata
6,307,894	B2	*	10/2001	Eidson et al. 375/297
6,317,589	B1		11/2001	Nash
6,335,656	B1		1/2002	Goldfarb et al.
6,363,262	B1		3/2002	McNicol
6,366,622	B1		4/2002	Brown et al.
6,370,371	B1	*	4/2002	Sorrells et al. 455/323
6,459,721	B1		10/2002	Mochizuki et al.
6,516,185	B1		2/2003	MacNally
6,531,979	B1		3/2003	Hynes
6,600,795	B1		7/2003	Ohta et al.
6,600,911	B1		7/2003	Morishige et al.
6,608,647	B1		8/2003	King
6,686,879	B2		2/2004	Shattil
6,687,493	B1		2/2004	Sorrells et al.
6,690,232	B2		2/2004	Ueno et al.
6,694,128	B1	*	2/2004	Looke et al. 455/76
6,697,603	B1		2/2004	Lovinggood et al.
6,704,549	B1	*	3/2004	Sorrells et al. 455/102
6,704,558	B1		3/2004	Sorrells et al.

OTHER PUBLICATIONS

English Translation of German Patent Publication No. DE 196 48 915 A1, 10 pages.

Deboo, Gordon J., *Integrated Circuits and Semiconductor Devices*, 2nd Edition, McGraw–Hill, Inc., pp. 41–45 (1977).

* cited by examiner

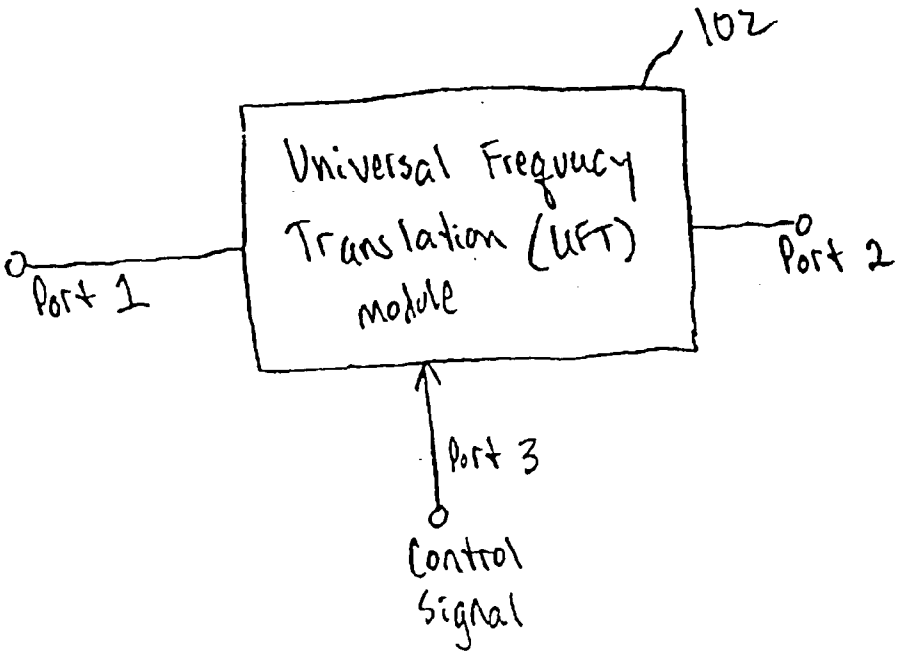

102
Universal Frequency Translation (UFT) module
Port 1
Port 2
Port 3
Control Signal

FIG. 1A

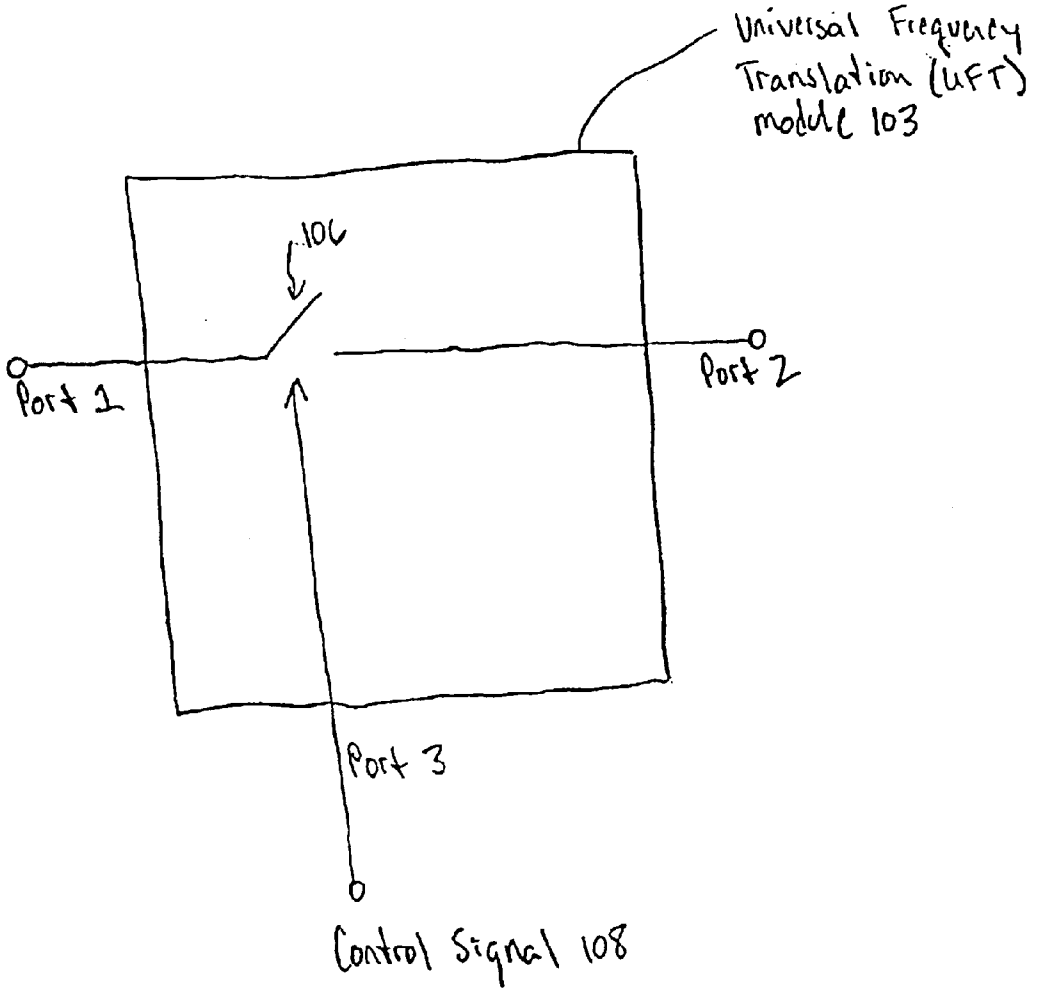

Universal Frequency Translation (UFT) module 103
106
Port 1
Port 2
Port 3
Control Signal 108

FIG. 1B

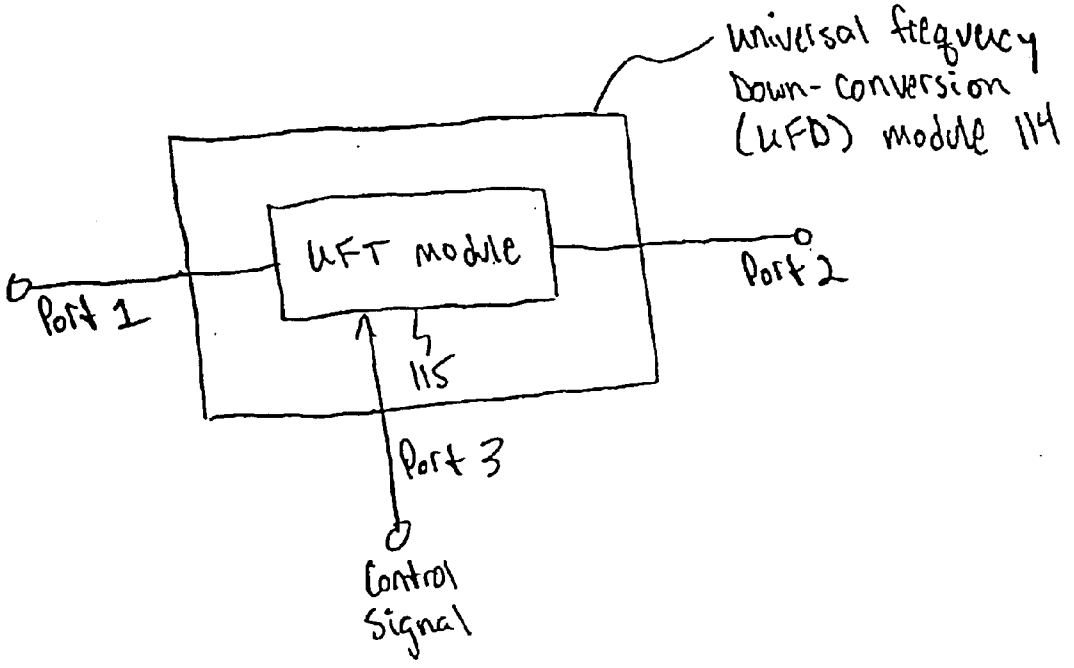

universal frequency
Down-conversion
(UFD) module 114
UFT module
Port 1
Port 2
115
Port 3
Control
Signal

FIG. 1C

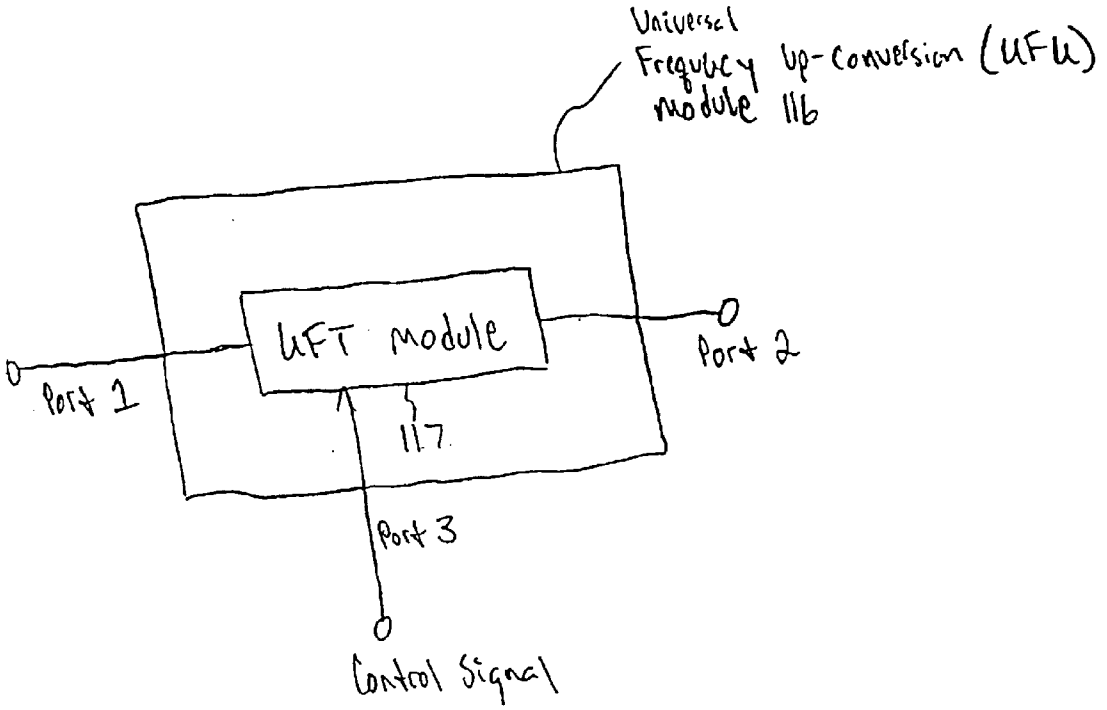

Universal
Frequency Up-Conversion (UFU)
module 116
UFT module
Port 1
Port 2
117
Port 3
Control Signal

FIG. 1D

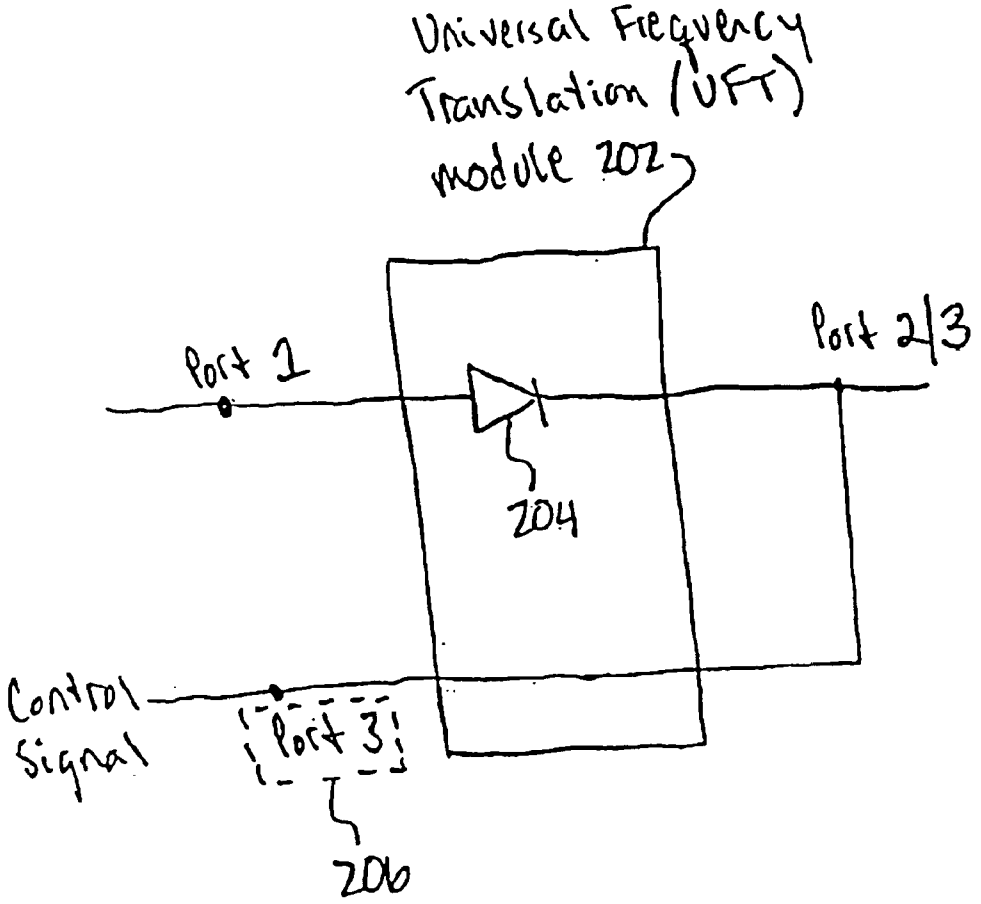

Universal Frequency Translation (UFT) module 202
Port 1
Port 2/3
204
Control Signal
Port 3
206

FIG. 2A

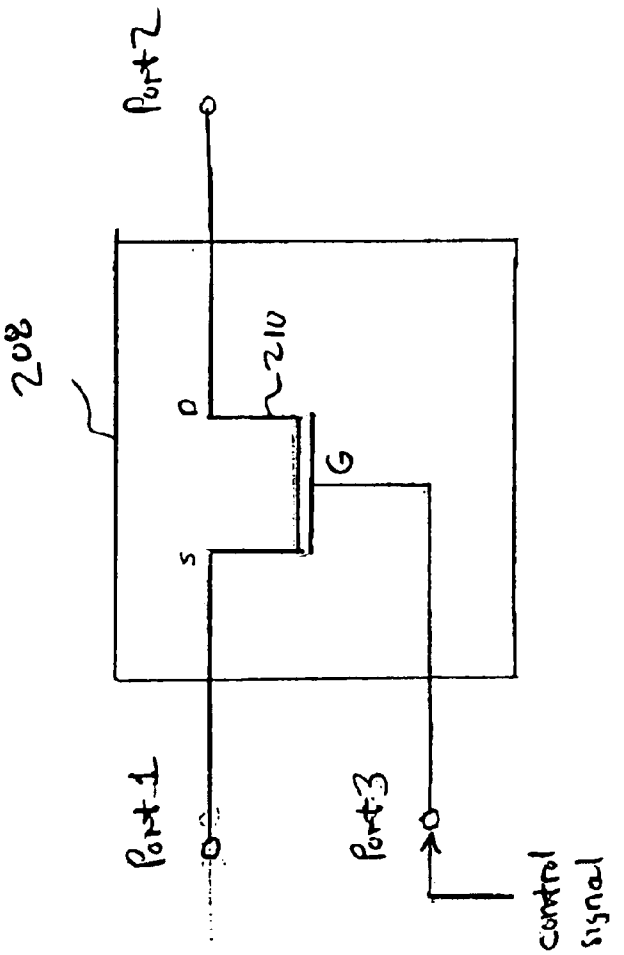


FIG. 2B

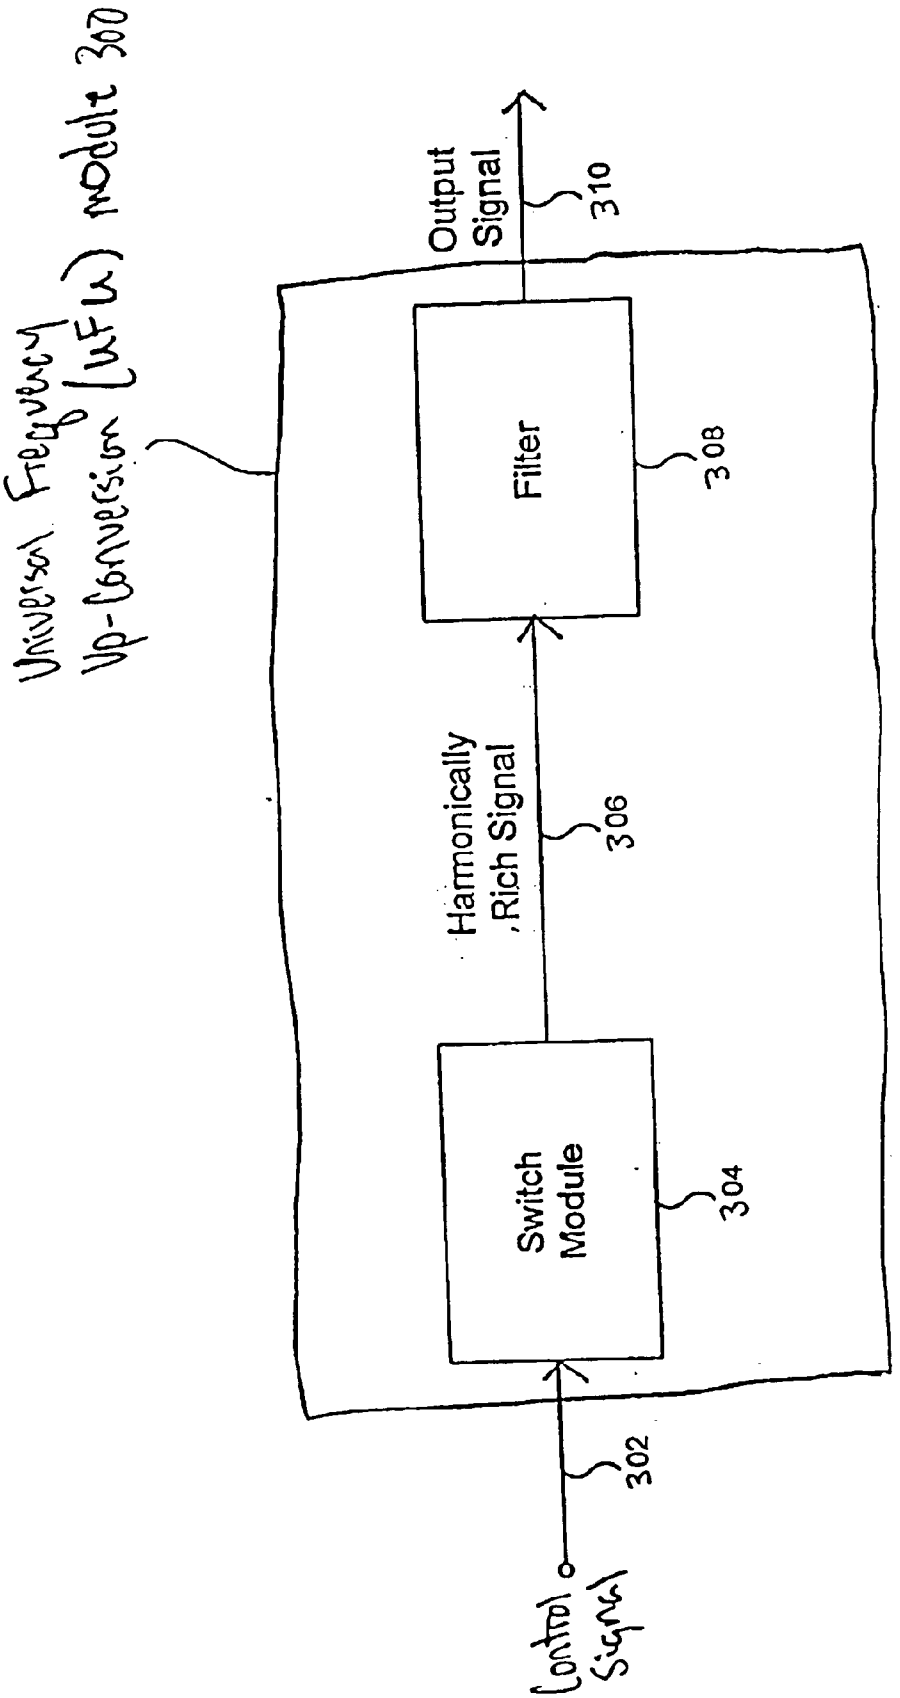

Universal Frequency Up-Conversion (UFU) module 300
Output Signal
310
Filter
308
Harmonically Rich Signal
306
Switch Module
304
302
Control Signal

FIG. 3

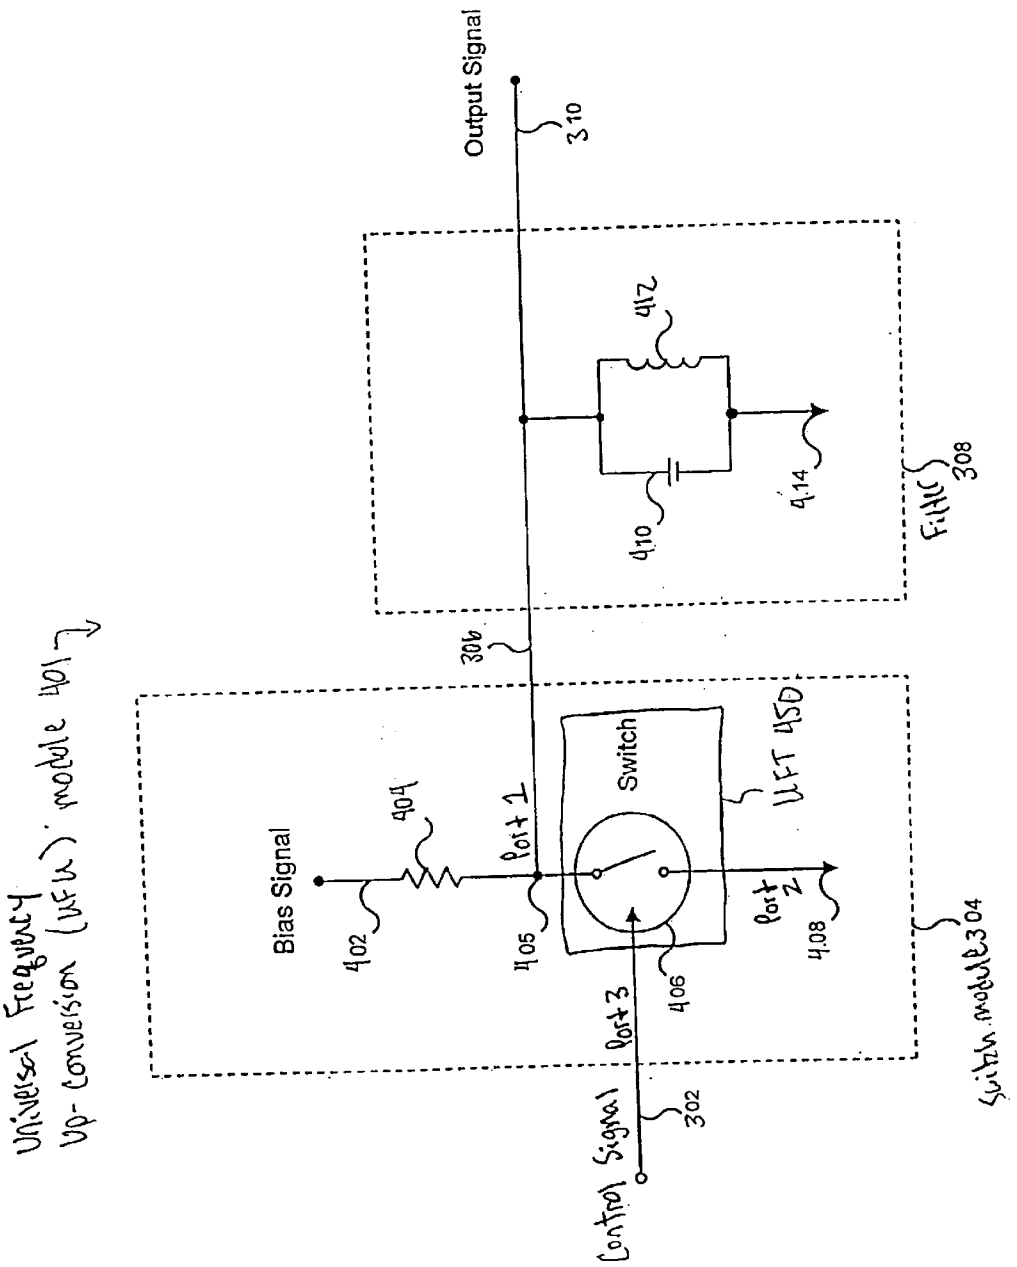

Universal Frequency Up-Conversion (UFU) module 401
Output Signal
310
412
410
414
Filter
308
306
Switch
UFT ASD
Bias Signal
404
Port 1
402
405
406
Port 2
408
Port 3
Control Signal
302
Switch module 304

FIG. 4



Universal Frequency Up-conversion (UFU) Module 590
Unshaped Input Signal
501
Pulse Shaping Module (optional)
502
Control Signal
302
Switch Module
304
306
Filter
308
Output Signal
310

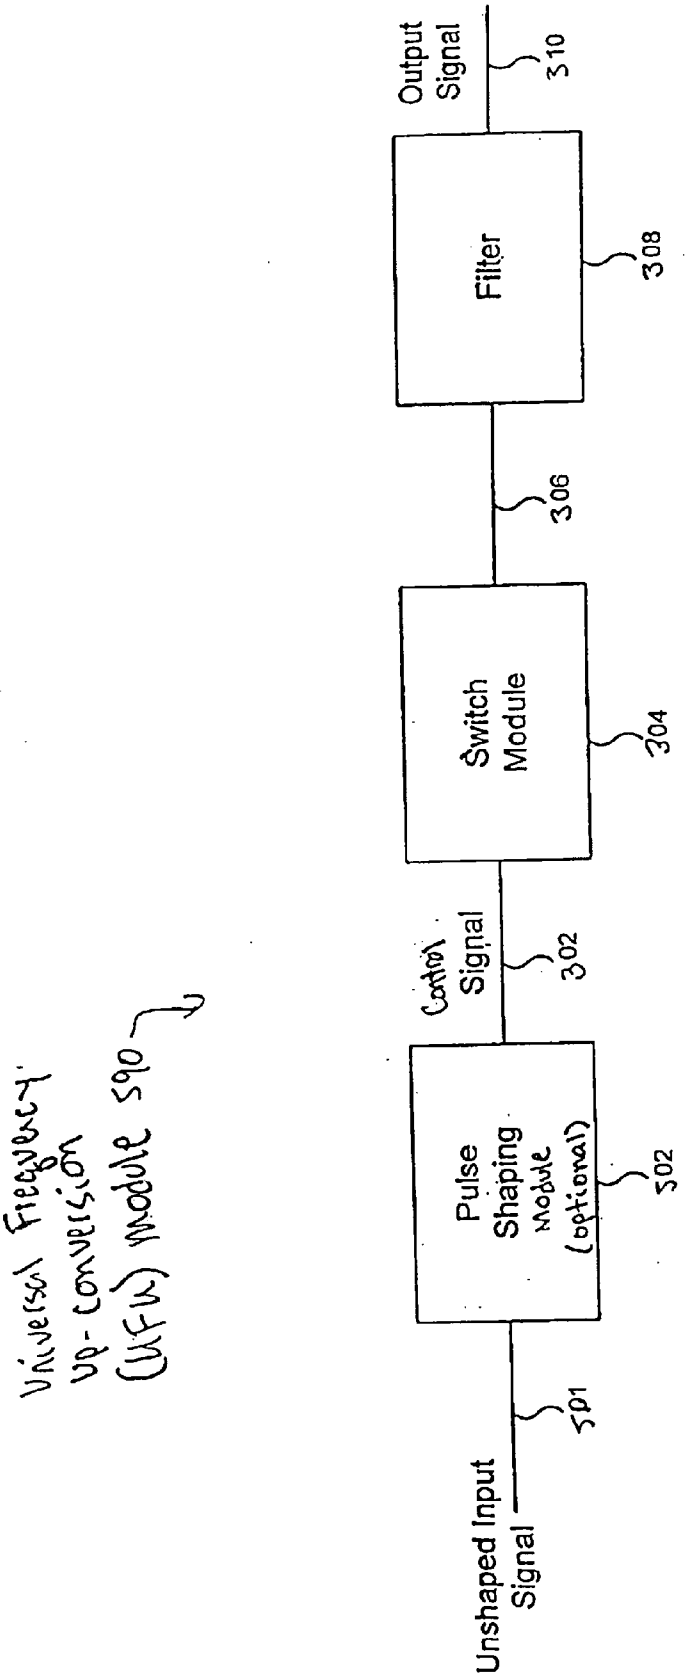FIG. 5


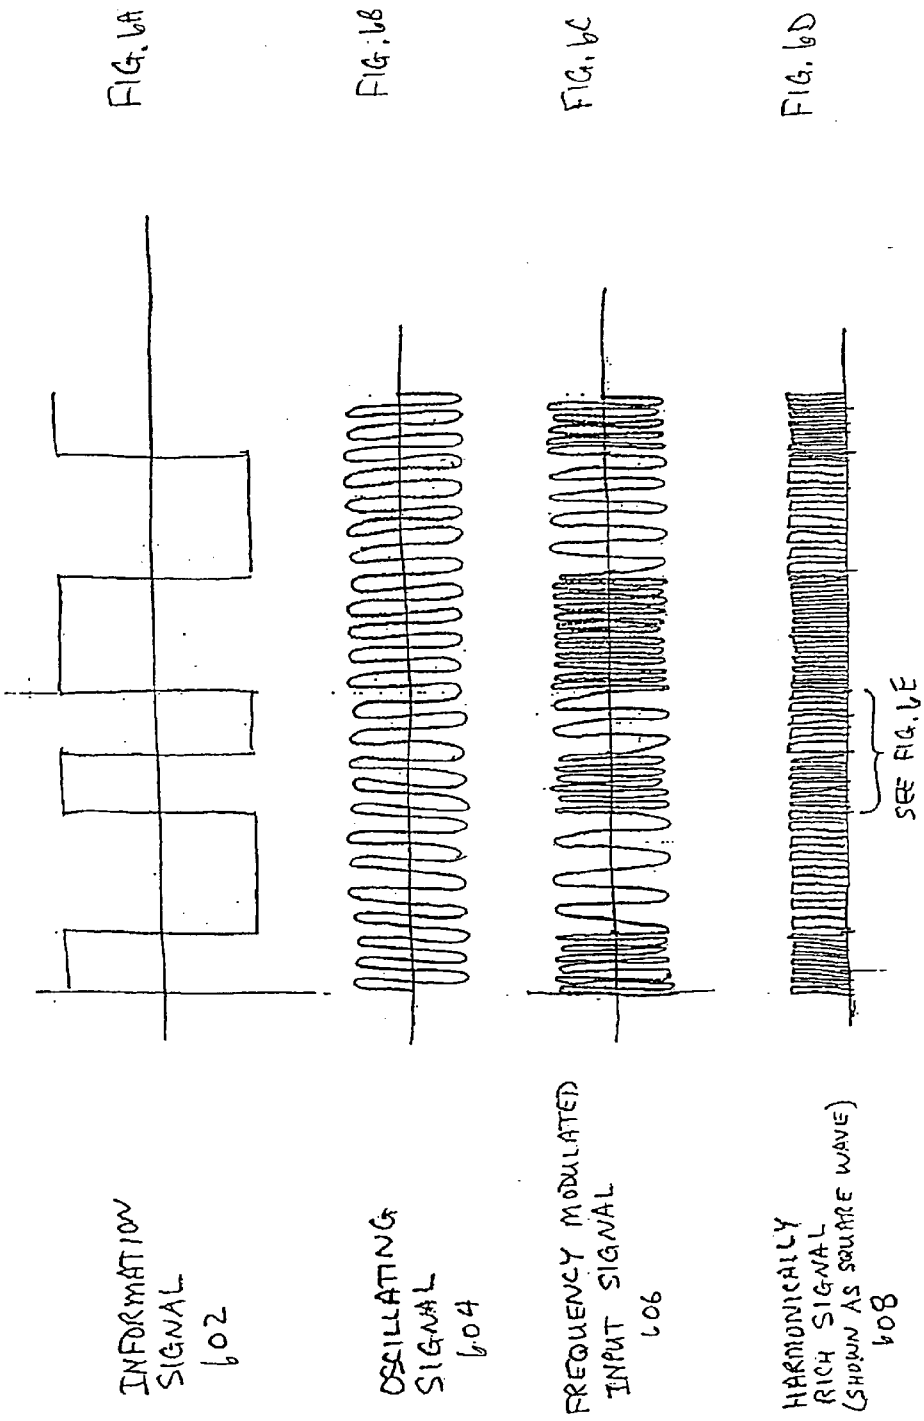

FIG. 6A
FIG. 6B
FIG. 6C
FIG. 6D
INFORMATION SIGNAL 602
OSCILLATING SIGNAL 604
FREQUENCY MODULATED INPUT SIGNAL 606
HARMONICALLY RICH SIGNAL (SHOWN AS SQUARE WAVE) 608
SEE FIG. 6E

FIG. 6

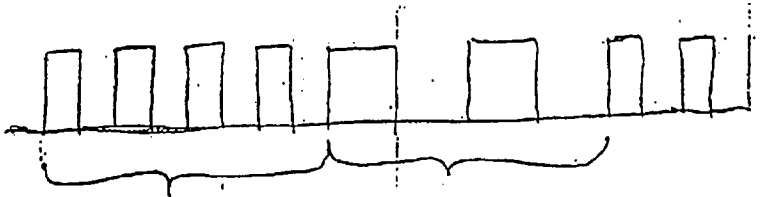
EXPANDED VIEW OF HARMONICALLY RICH SIGNAL 608



SEE FIG. 6F SEE FIG. 6G

FIG 6E

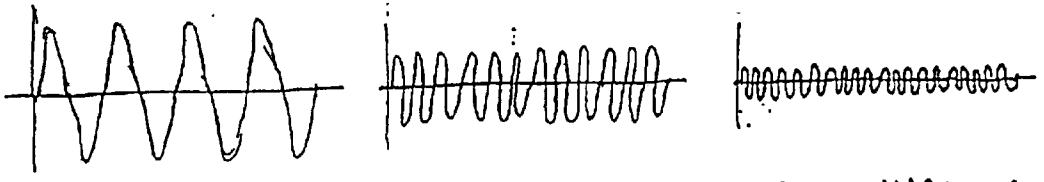HARMONICS OF SIGNAL 610 (SHOWN SEPARATELY)




FUNDAMENTAL FREQUENCY 610A

THIRD HARMONIC 610B

FIFTH HARMONIC 610C

FIG. 6F

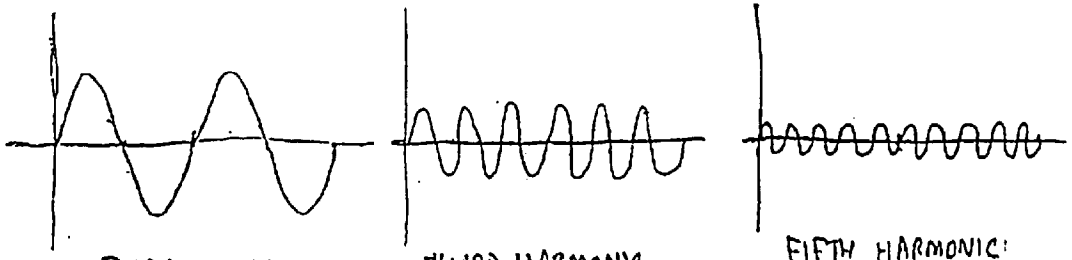HARMONICS OF SIGNAL 612 (SHOWN SEPARATELY)



FUNDAMENTAL FREQUENCY 612A

THIRD HARMONIC 612B

FIFTH HARMONIC 612C

FIG 6G

FIG 6H

FIG. 6I

FIG 6 (cont)

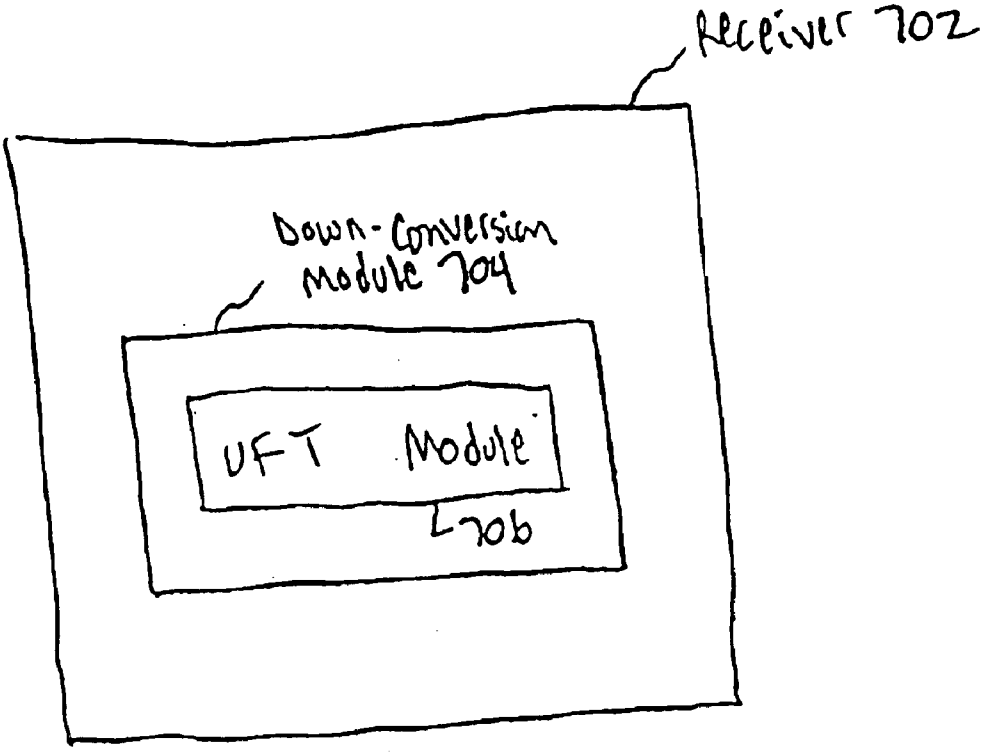


FIG. 7

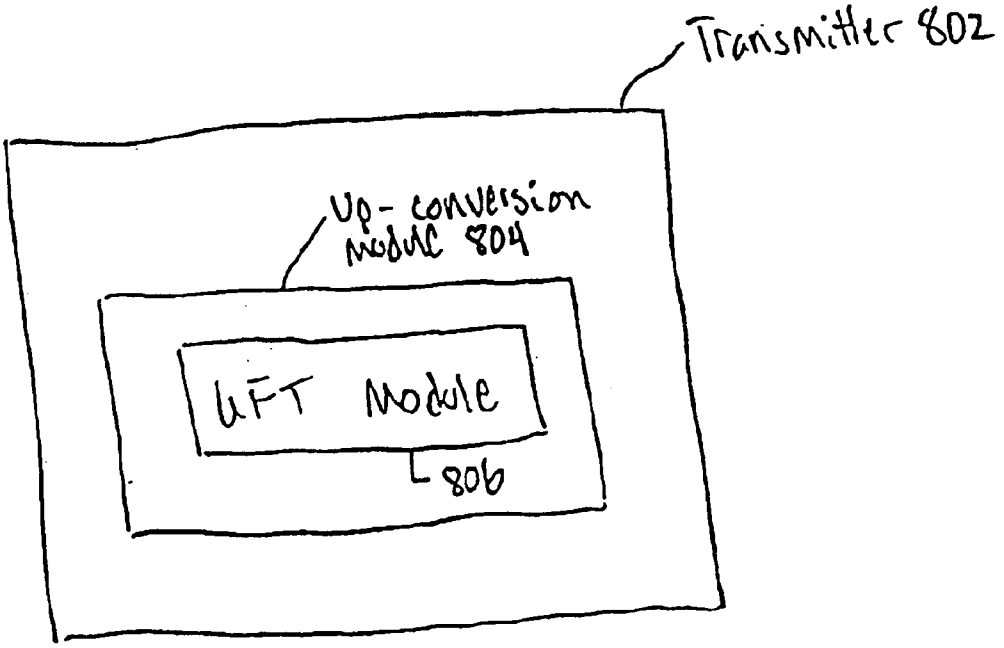


FIG. 8

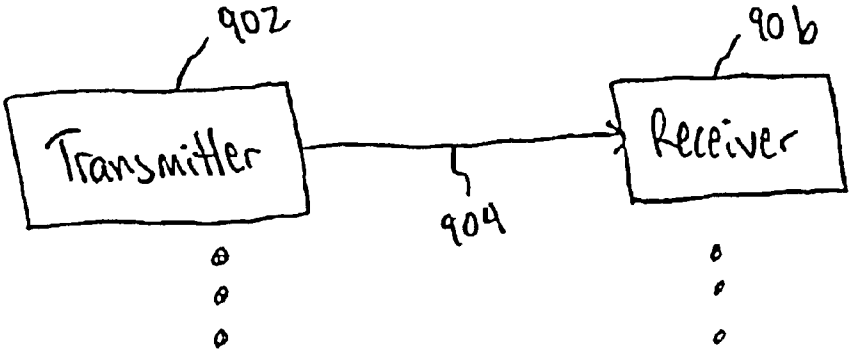


FIG. 9

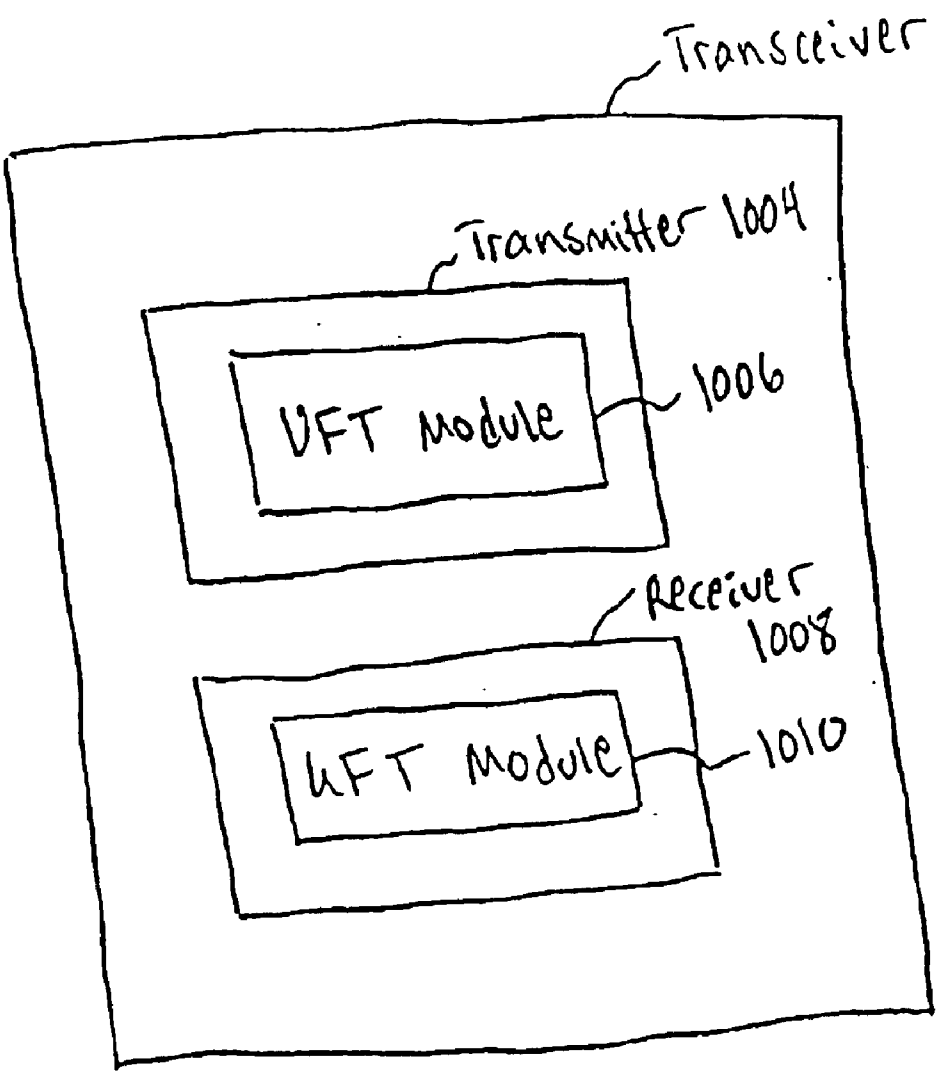

Transceiver 1002
Transmitter 1004
VFT Module
1006
Receiver
1008
UFT Module
1010

FIG. 10

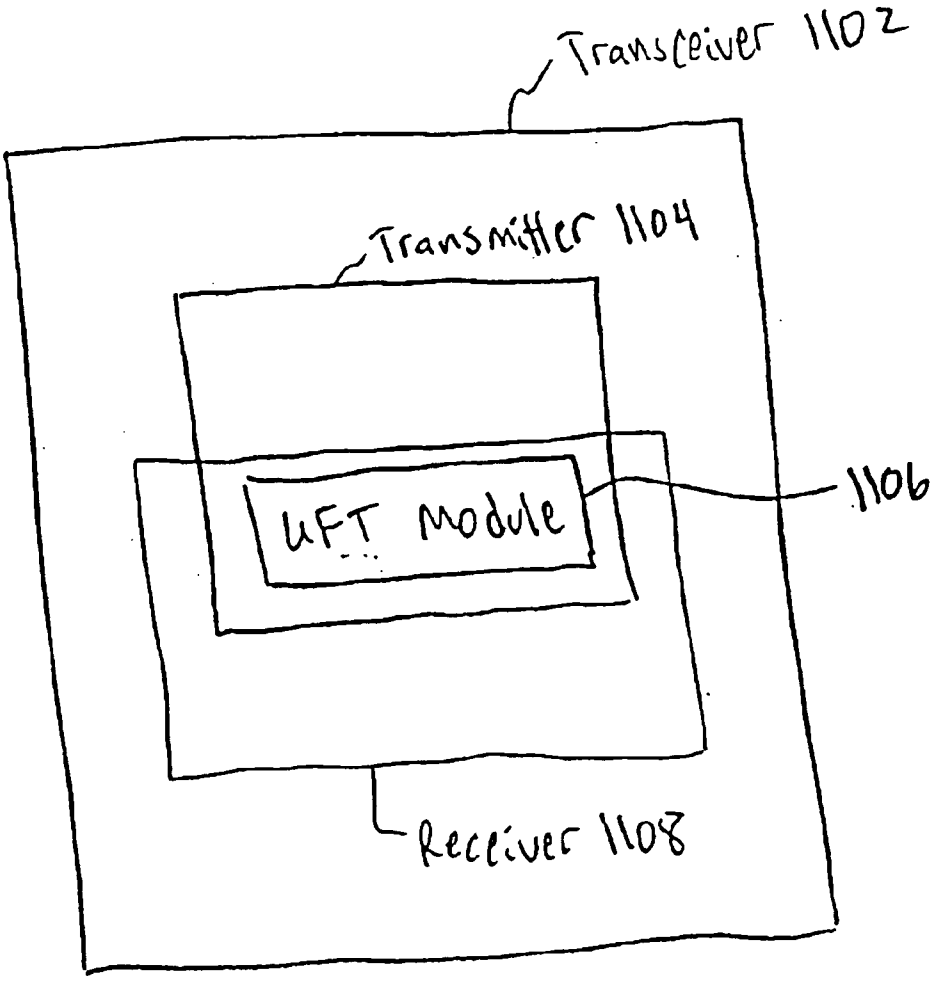

Transceiver 1102
Transmitter 1104
UFT Module
1106
Receiver 1108

FIG. 11

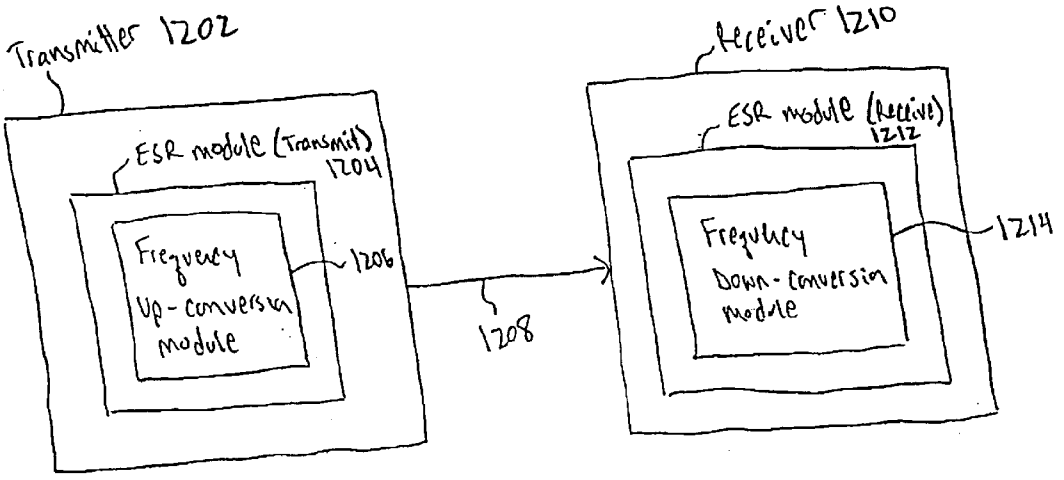

Transmitter 1202
ESR module (Transmit) 1204
Frequency Up-conversion module
1206
1208
Receiver 1210
ESR module (Receive) 1212
Frequency Down-conversion module
1214

FIG. 12

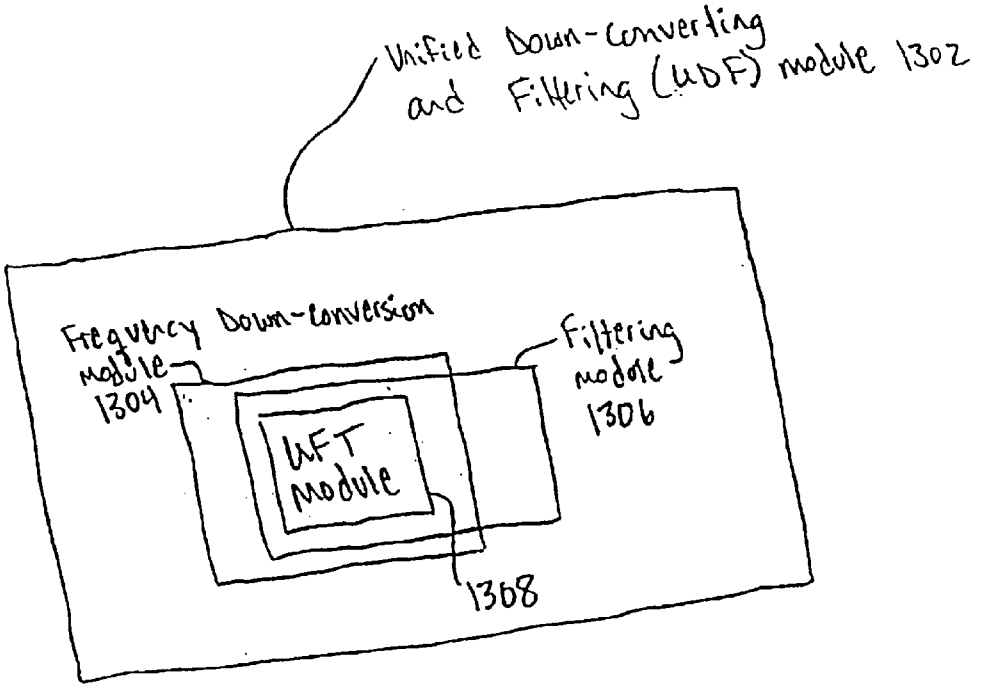

Unified Down-converting and Filtering (UDF) module 1302
Frequency Down-conversion module 1304
Filtering module 1306
UFT module
1308

FIG. 13

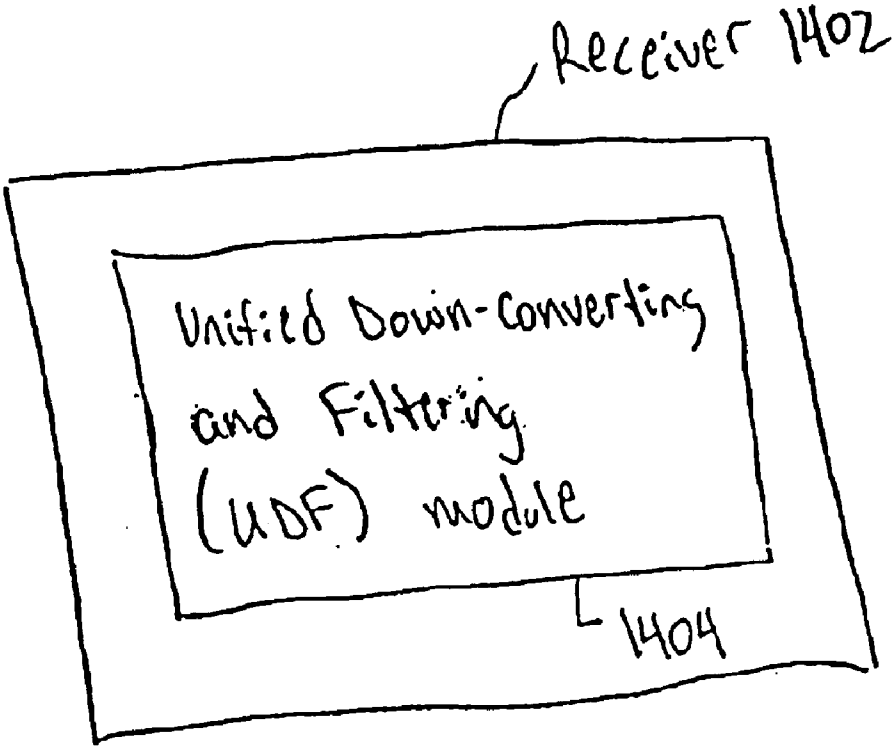

Receiver 1402
Unified Down-Converting and Filtering (UDF) module
1404

FIG. 14

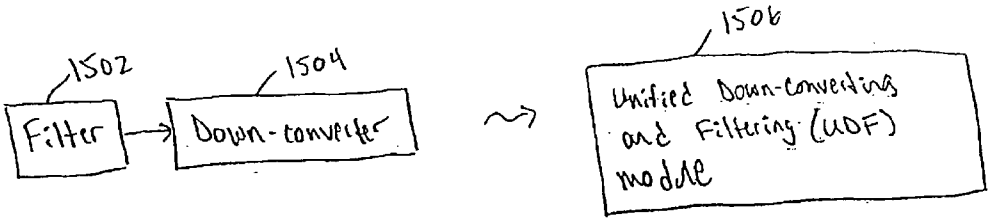


FIG. 15A

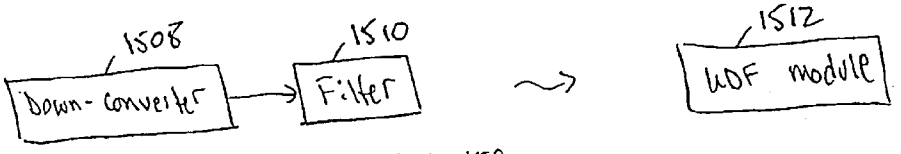


FIG. 15B

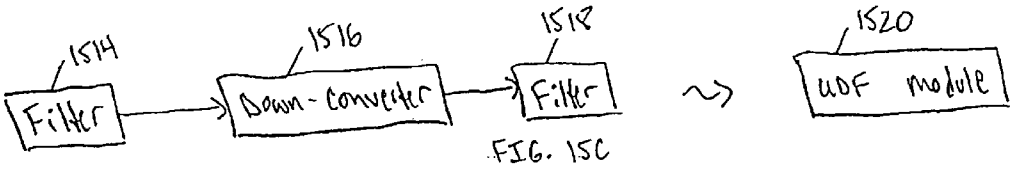


FIG. 15C



FIG. 15D



FIG. 15E



FIG. 15F

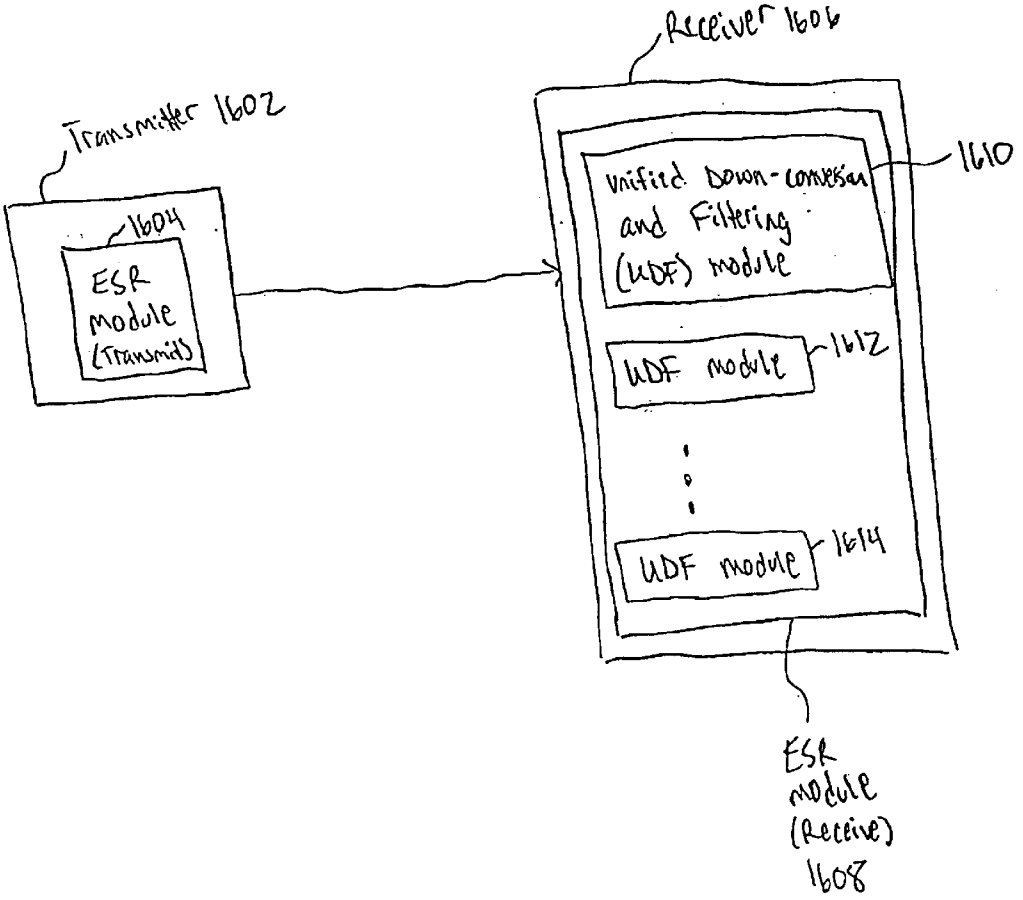

Receiver 1606
Transmitter 1602
1604
ESR module (Transmit)
Unified Down-conversion and Filtering (UDF) module
1610
UDF module
1612
UDF module
1614
ESR module (Receive) 1608

FIG. 16

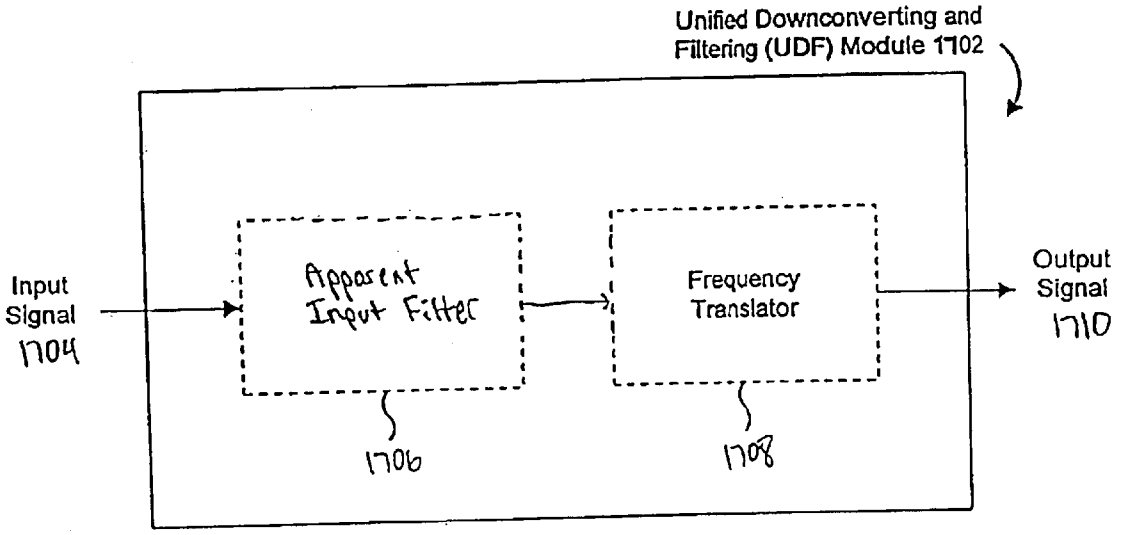

Unified Downconverting and
Filtering (UDF) Module 1702
Input
Signal
1704
Apparent
Input Filter
1706
Frequency
Translator
1708
Output
Signal
1710

FIG. 17

1802

Time Node	t-1 (rising edge of ϕ_1)	t-1 (rising edge of ϕ_2)	t (rising edge of ϕ_1)	t (rising edge of ϕ_2)	t+1 (rising edge of ϕ_1)
1902	VI_{t-1} 1804	VI_{t-1} 1808	VI_t 1816	VI_t 1826	VI_{t+1} 1838
1904	—	VI_{t-1} 1810	VI_{t-1} 1818	VI_t 1828	VI_t 1840
1906	VO_{t-1} 1806	VO_{t-1} 1812	VO_t 1820	VO_t 1830	VO_{t+1} 1842
1908	—	VO_{t-1} 1814	VO_{t-1} 1822	VO_t 1832	VO_t 1844
1910	— 1807	—	VO_{t-1} 1824	VO_{t-1} 1834	VO_t 1846
1912	—	— 1815	—	VO_{t-1} 1836	VO_{t-1} 1848
1918	—	—	—	—	VI_t - 1850 $0.1 * VO_t$ - $0.8 * VO_{t-1}$

FIG. 18

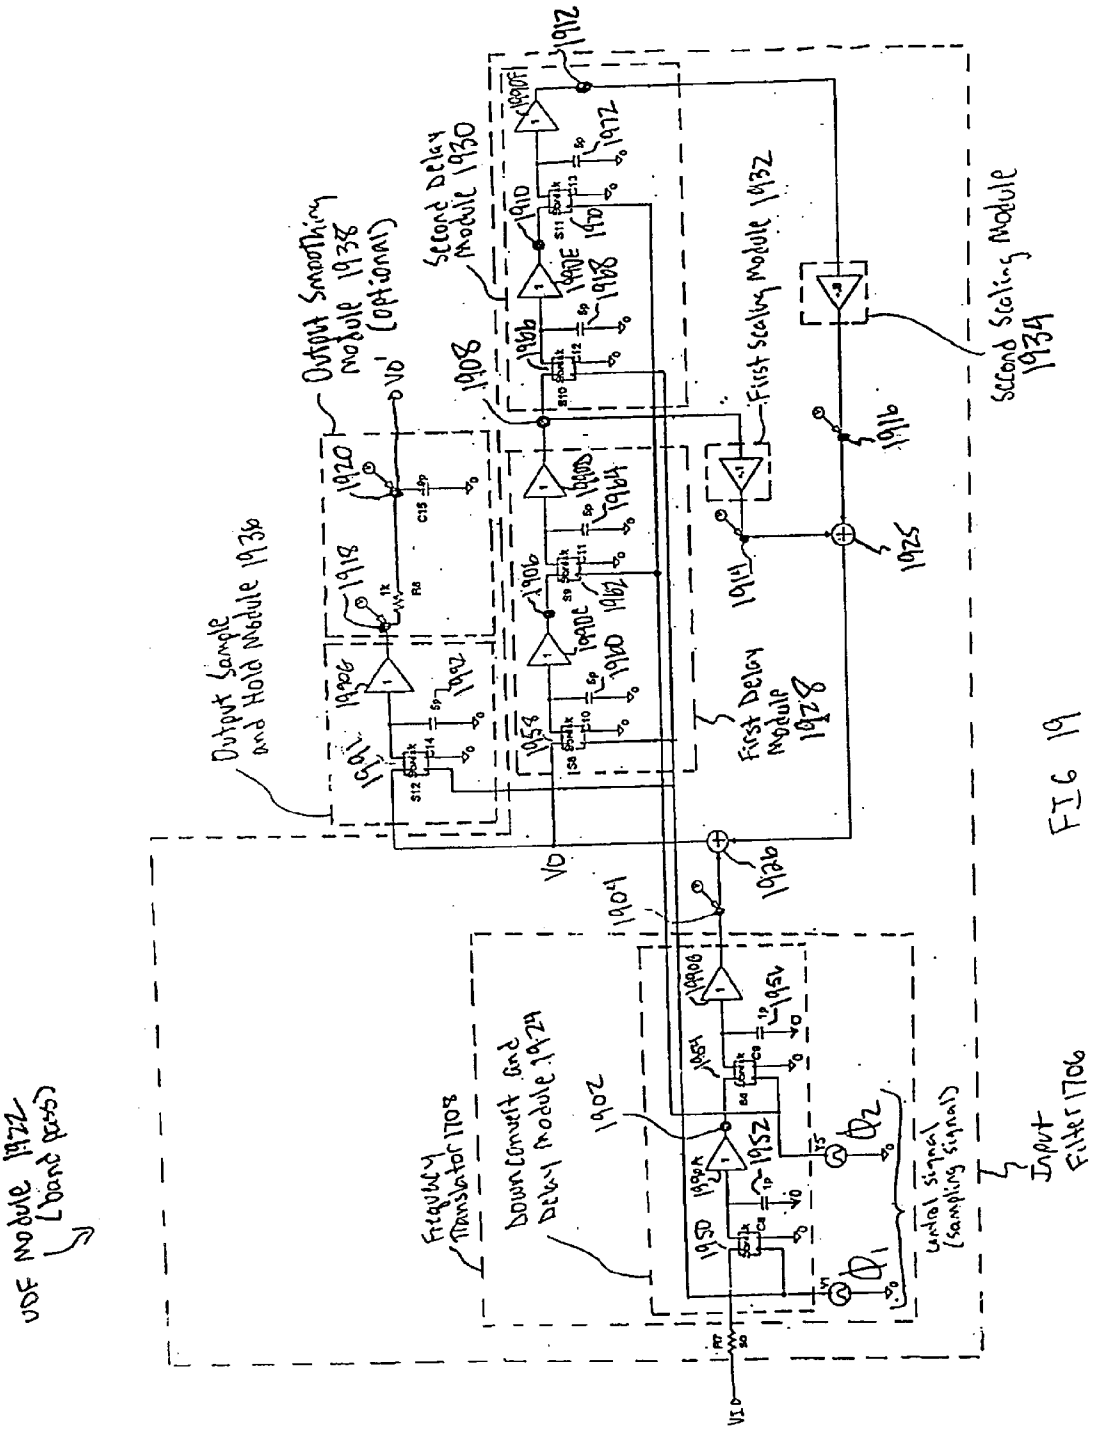

VDE Module 1922
(band pass)
Frequency Translator 1708
Down Convert and Delay Module 1924
Input Filter 1706
Output Sample and Hold Module 1936
Output Smoothing Module 1938 (optional)
Second Delay Module 1930
First Delay Module 1928
First Scaling Module 1932
Second Scaling Module 1934
1902
1904
1906
1908
1910
1912
1914
1916
1918
1920
1922
1924
1925
1926
1927
1928
1930
1932
1934
1936
1938
VD
VD'
Vo
Vi
Control signal (sampling signal)

FIG 19

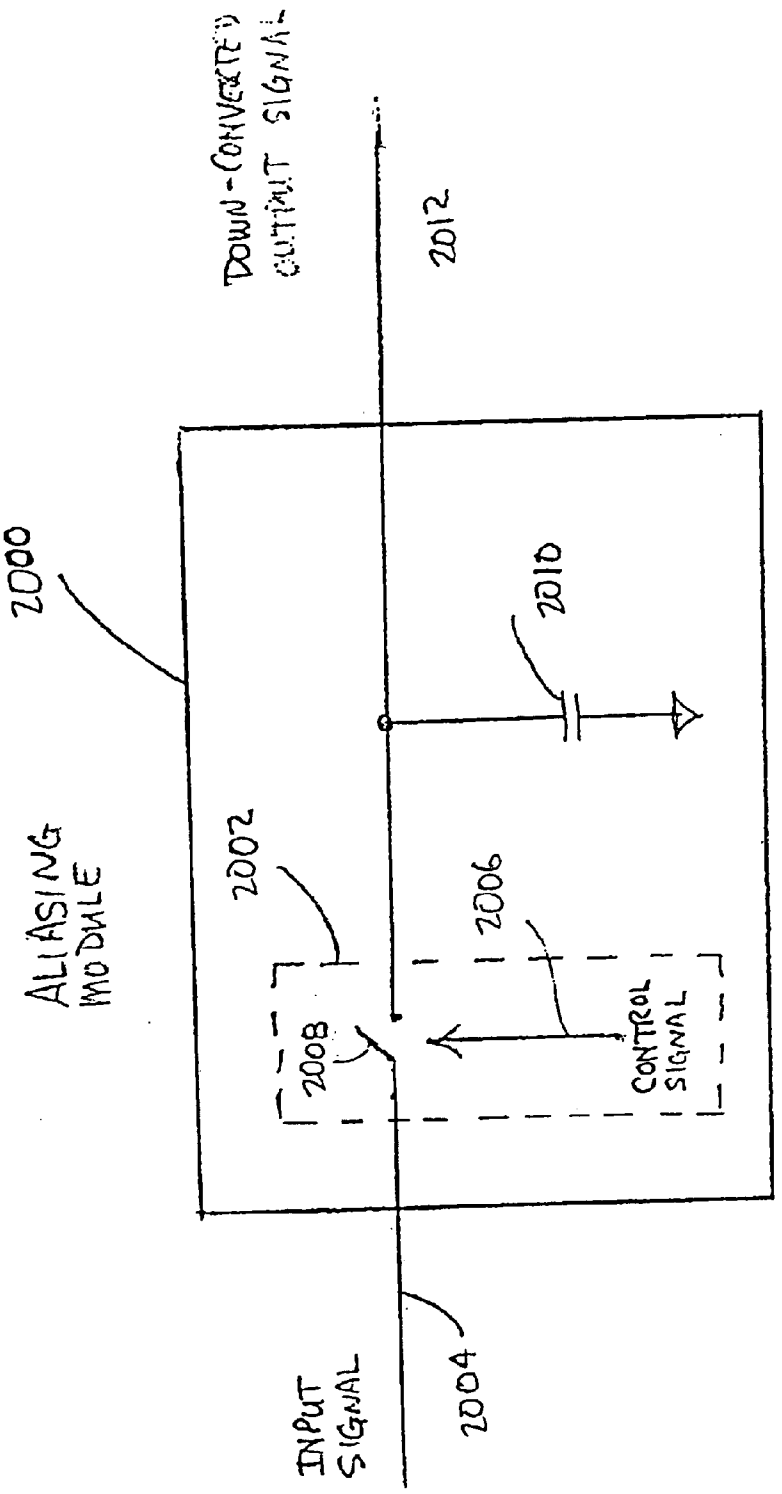

DOWN-CONVERTED OUTPUT SIGNAL
2012
2000
2010
ALIASING MODULE
2002
2006
2008
CONTROL SIGNAL
INPUT SIGNAL
2004

FIG. 2DA

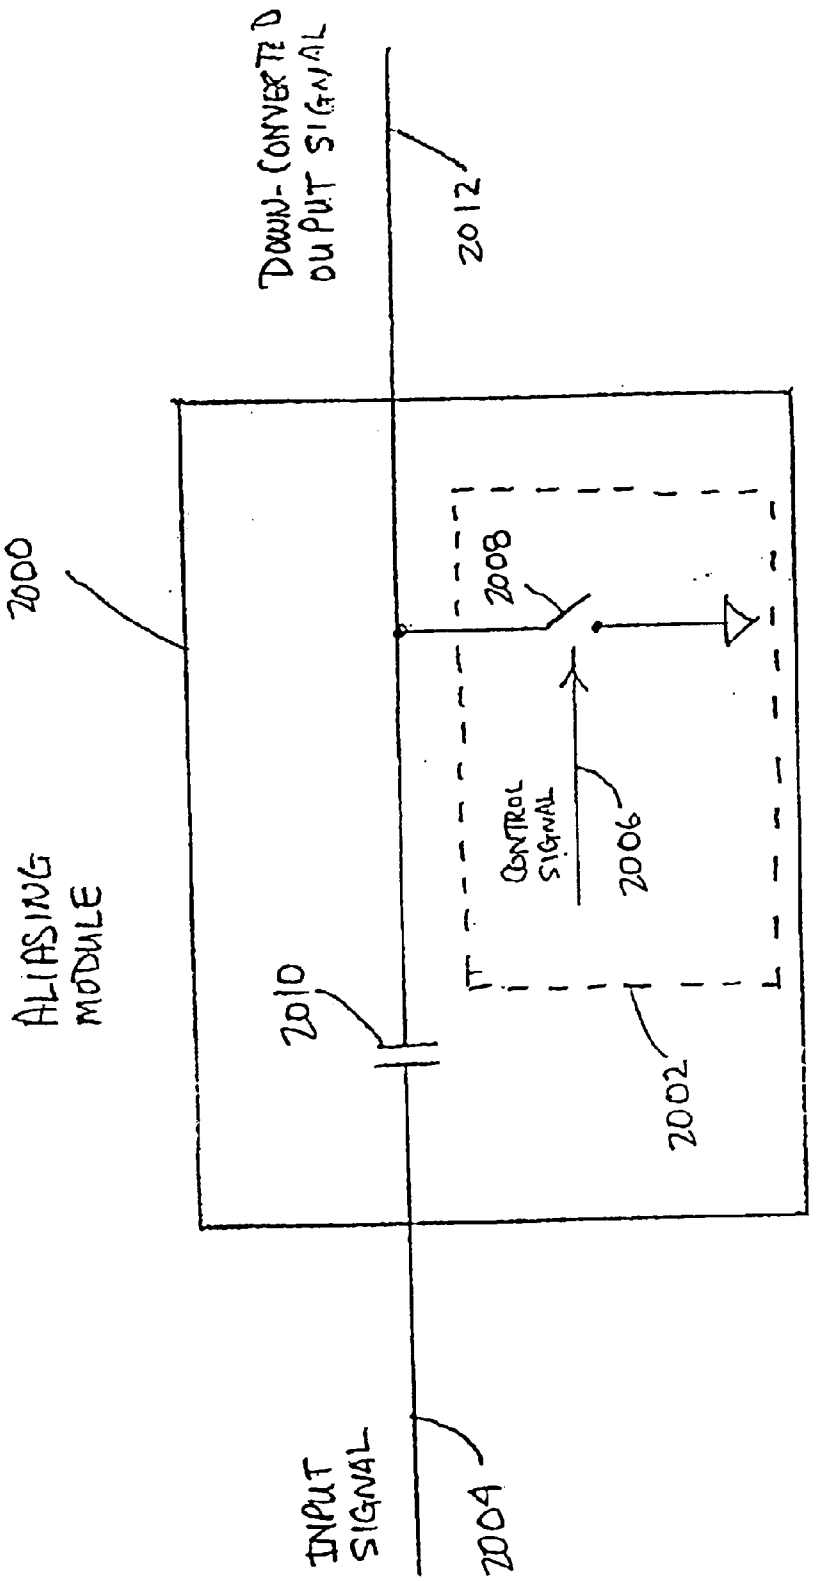

DOWN-CONVERTED OUTPUT SIGNAL
2012
2000
2008
ALIASING MODULE
CONTROL SIGNAL
2006
2010
2002
INPUT SIGNAL
2004

FIG. 20A-1

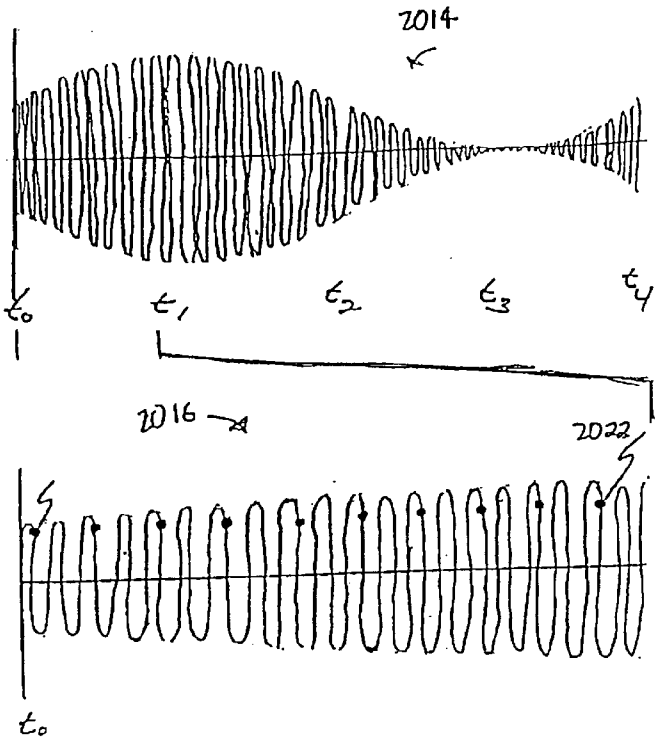


FIG. 20B

FIG. 20C

FIG. 20D

FIG. 20E

FIG. 20F

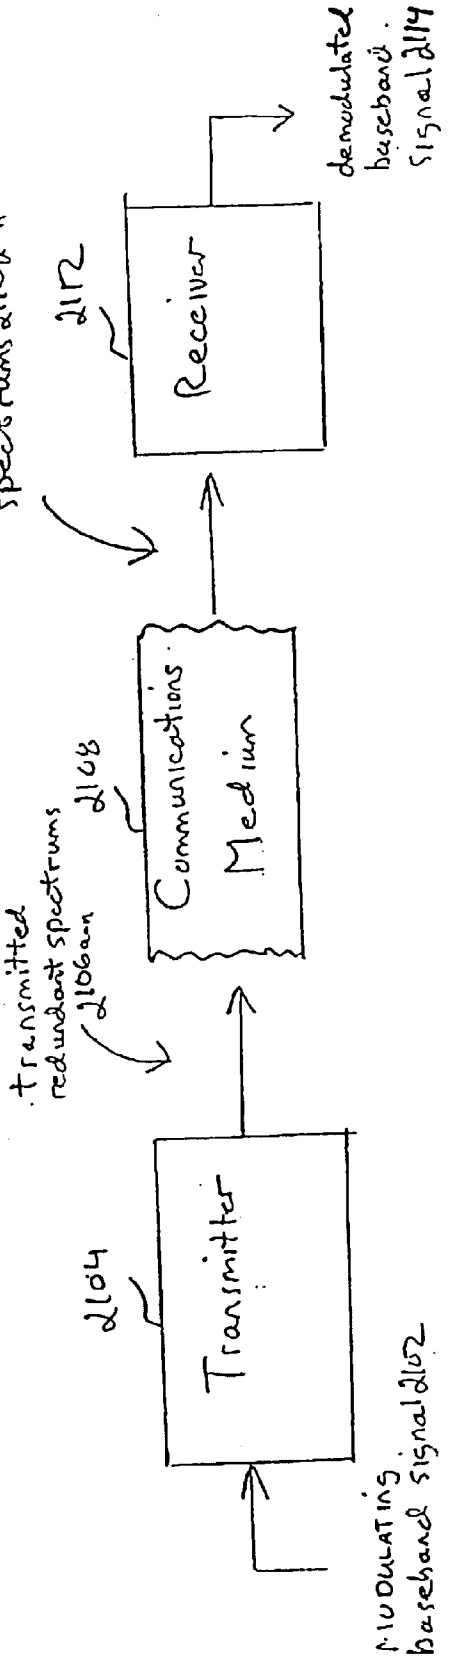
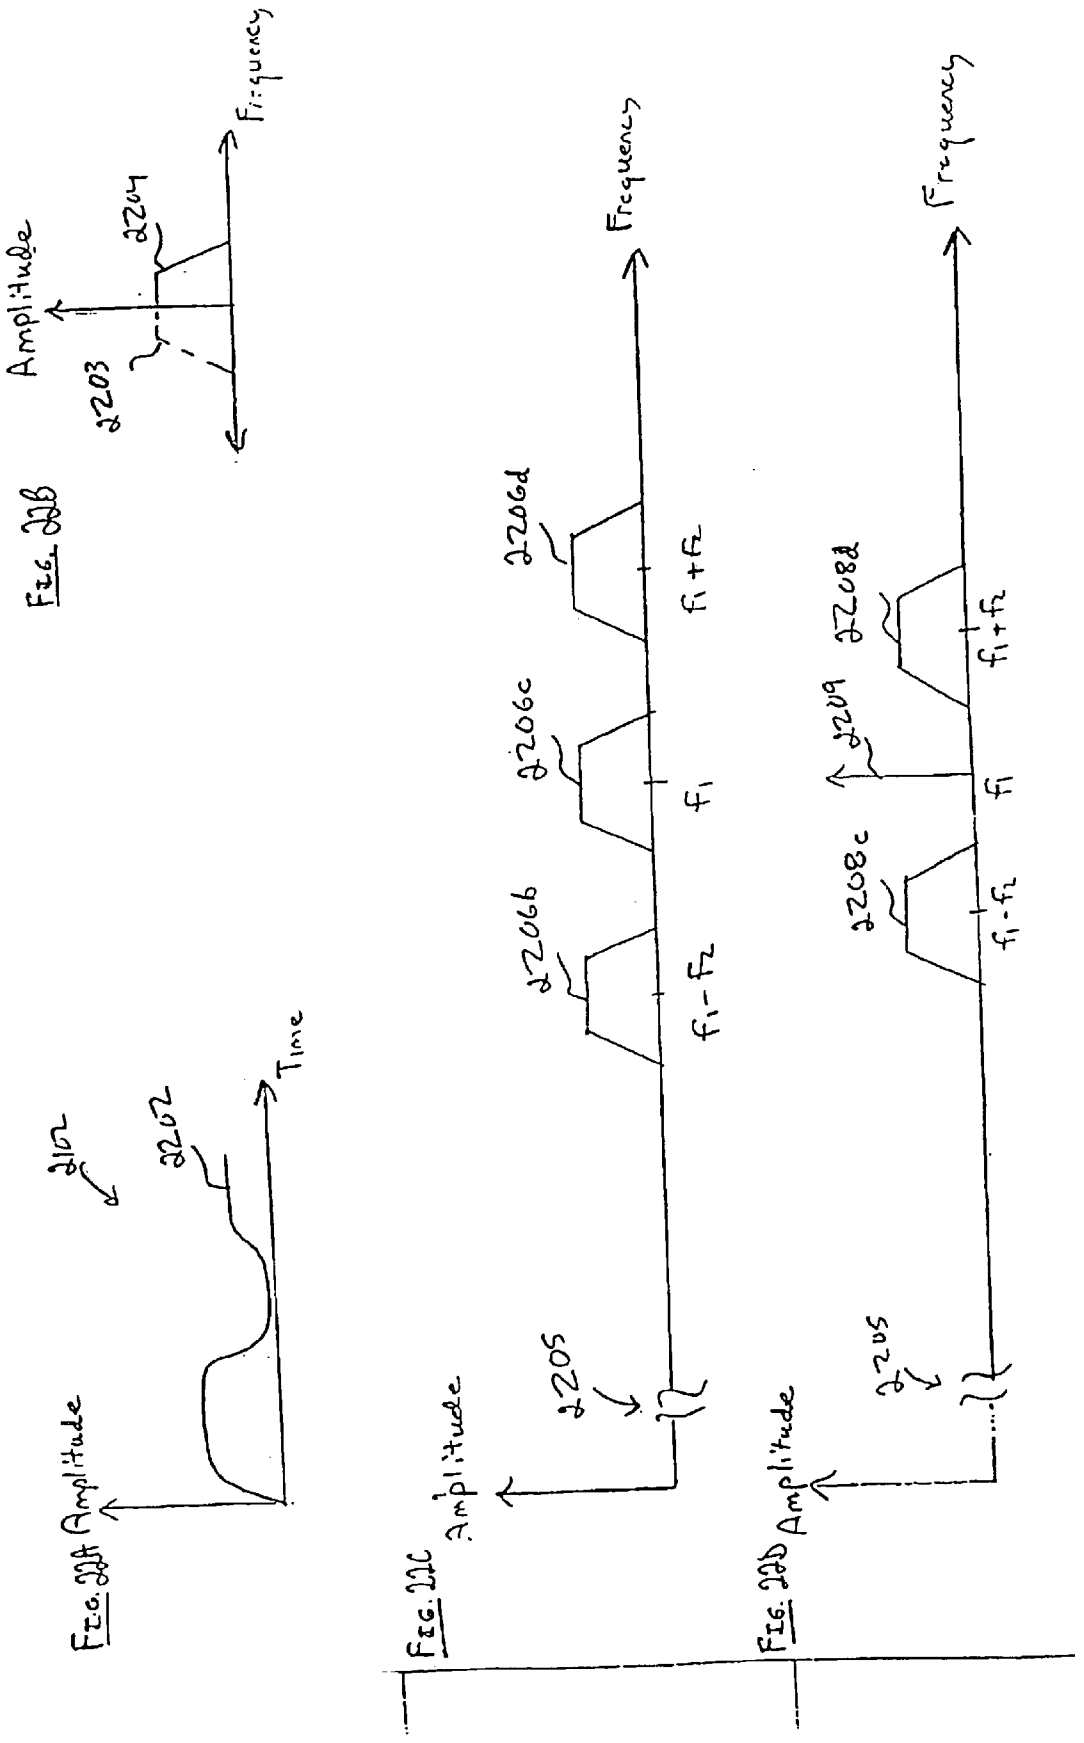

Transmitter
2104
Communications Medium
2108
Receiver
2112
modulating baseband signal 2102
transmitted redundant spectrums 2106a-n
received redundant spectrums 2110a-n
demodulated baseband signal 2114

FIG. 21


Amplitude
Time
2202
2201
Fig. 22A
Amplitude
Frequency
2203
2204
Fig. 22B
Amplitude
Frequency
2205
2206a
2206b
2206c
2206d
f1-f2
f1
f1+f2
Fig. 22C
Amplitude
Frequency
2205
2208a
2208b
2208c
2208d
f1-f2
f1
f1+f2
Fig. 22D



Frequency
Amplitude
Time
f_1
(f_1+f_2)
(f_1-f_2)
2205
2210a
2210b
2210c
2211
2212

Fig. 2E

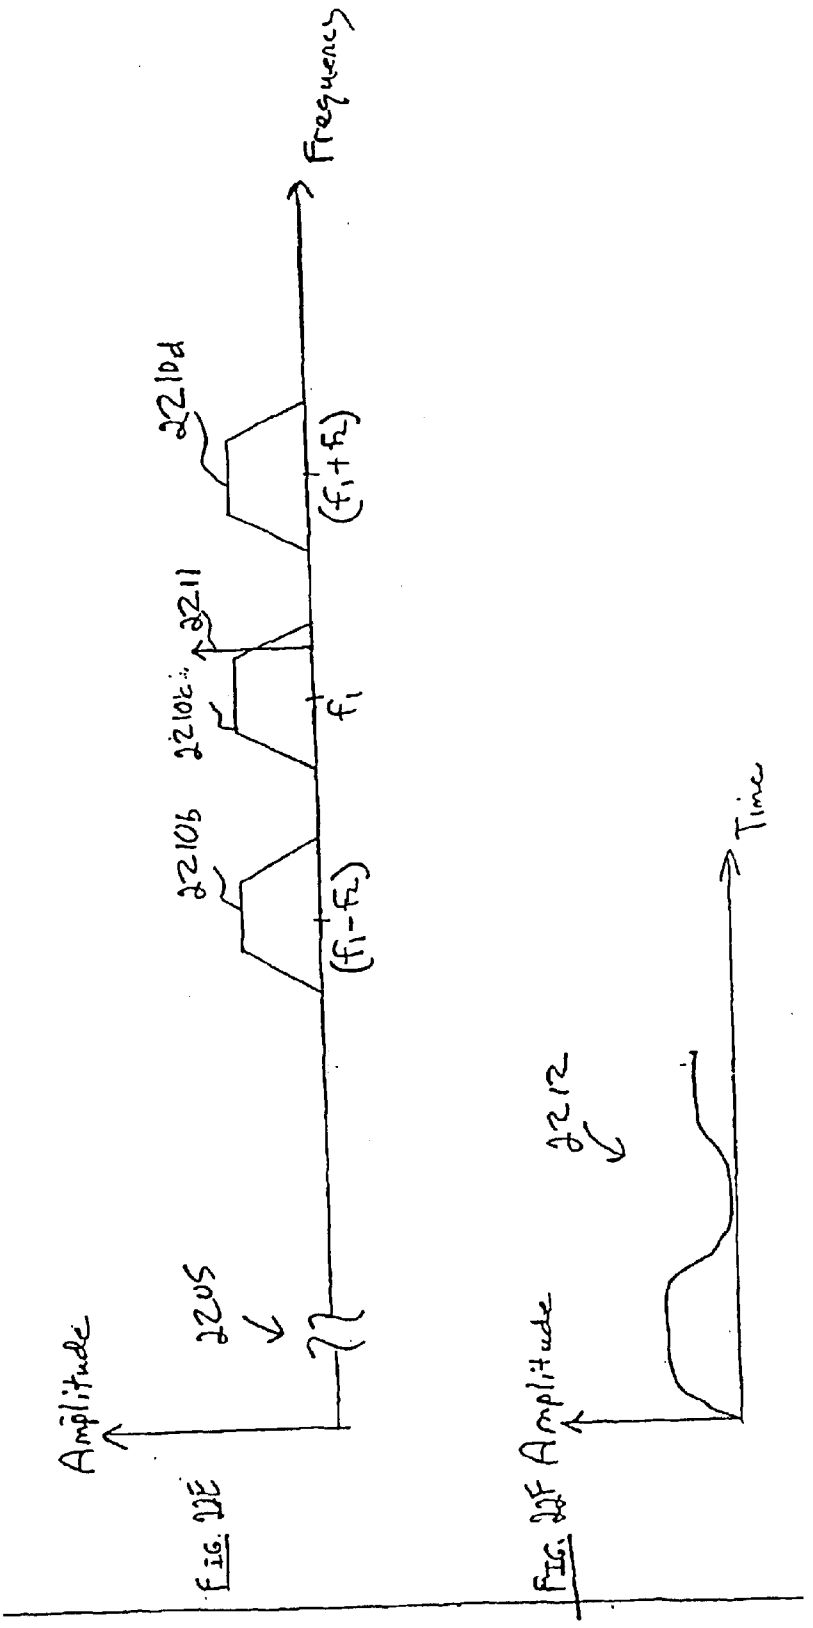Fig. 2F

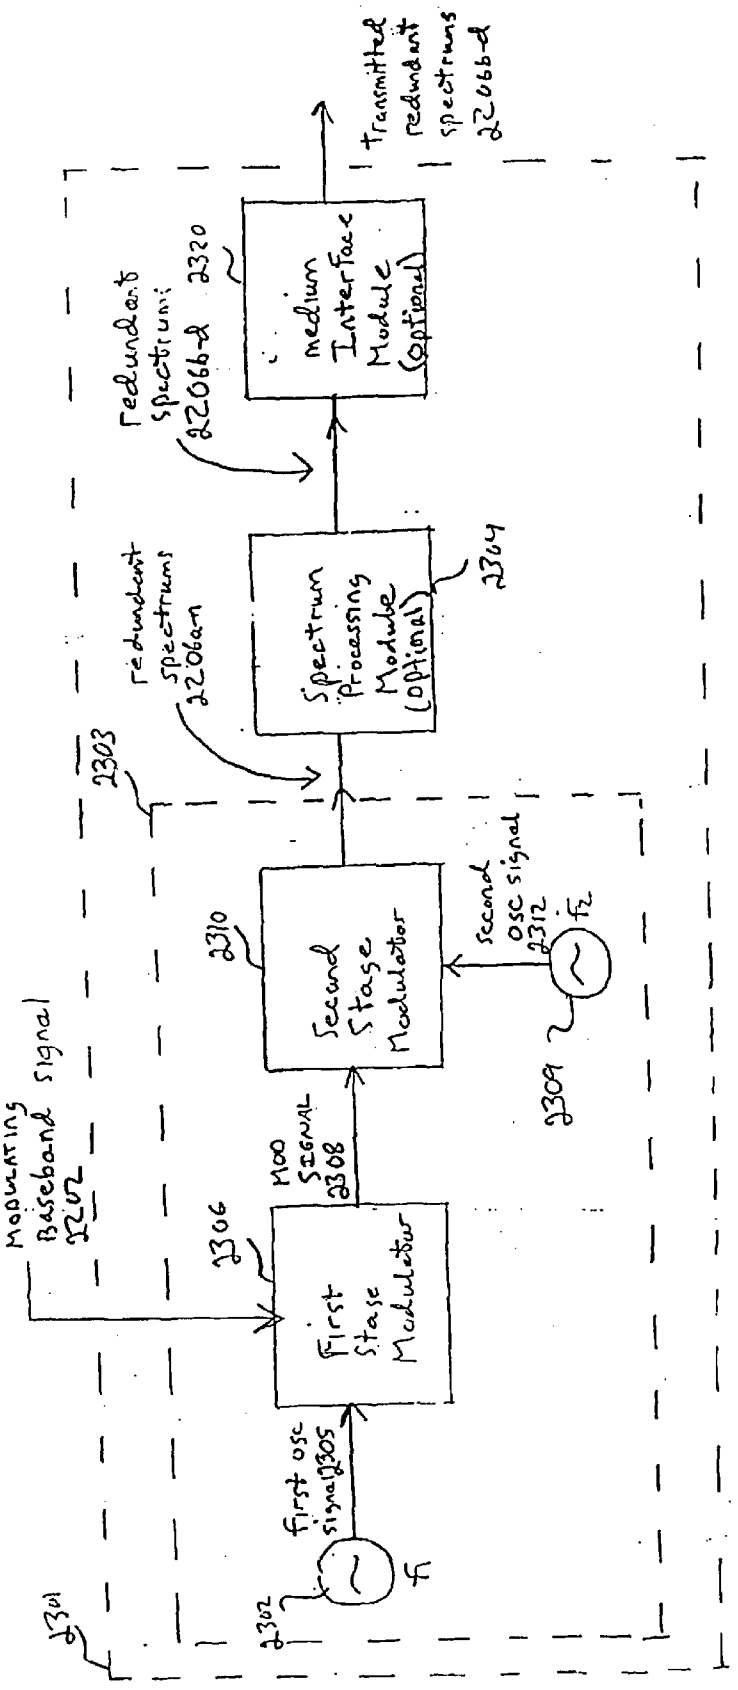

2301
2302
first osc signal 2305
f1
2306
First Stage Modulator
MOD SIGNAL 2308
2310
Second Stage Modulator
second osc signal 2312
f2
2309
Modulating Baseband signal 2307
2303
redundant spectrums 2206a-n
Spectrum Processing Module (optional)
2304
redundant spectrums 2206b-n
2320
medium Interface Module (optional)
transmitted redundant spectrums 2206b-n

FIG. 23A

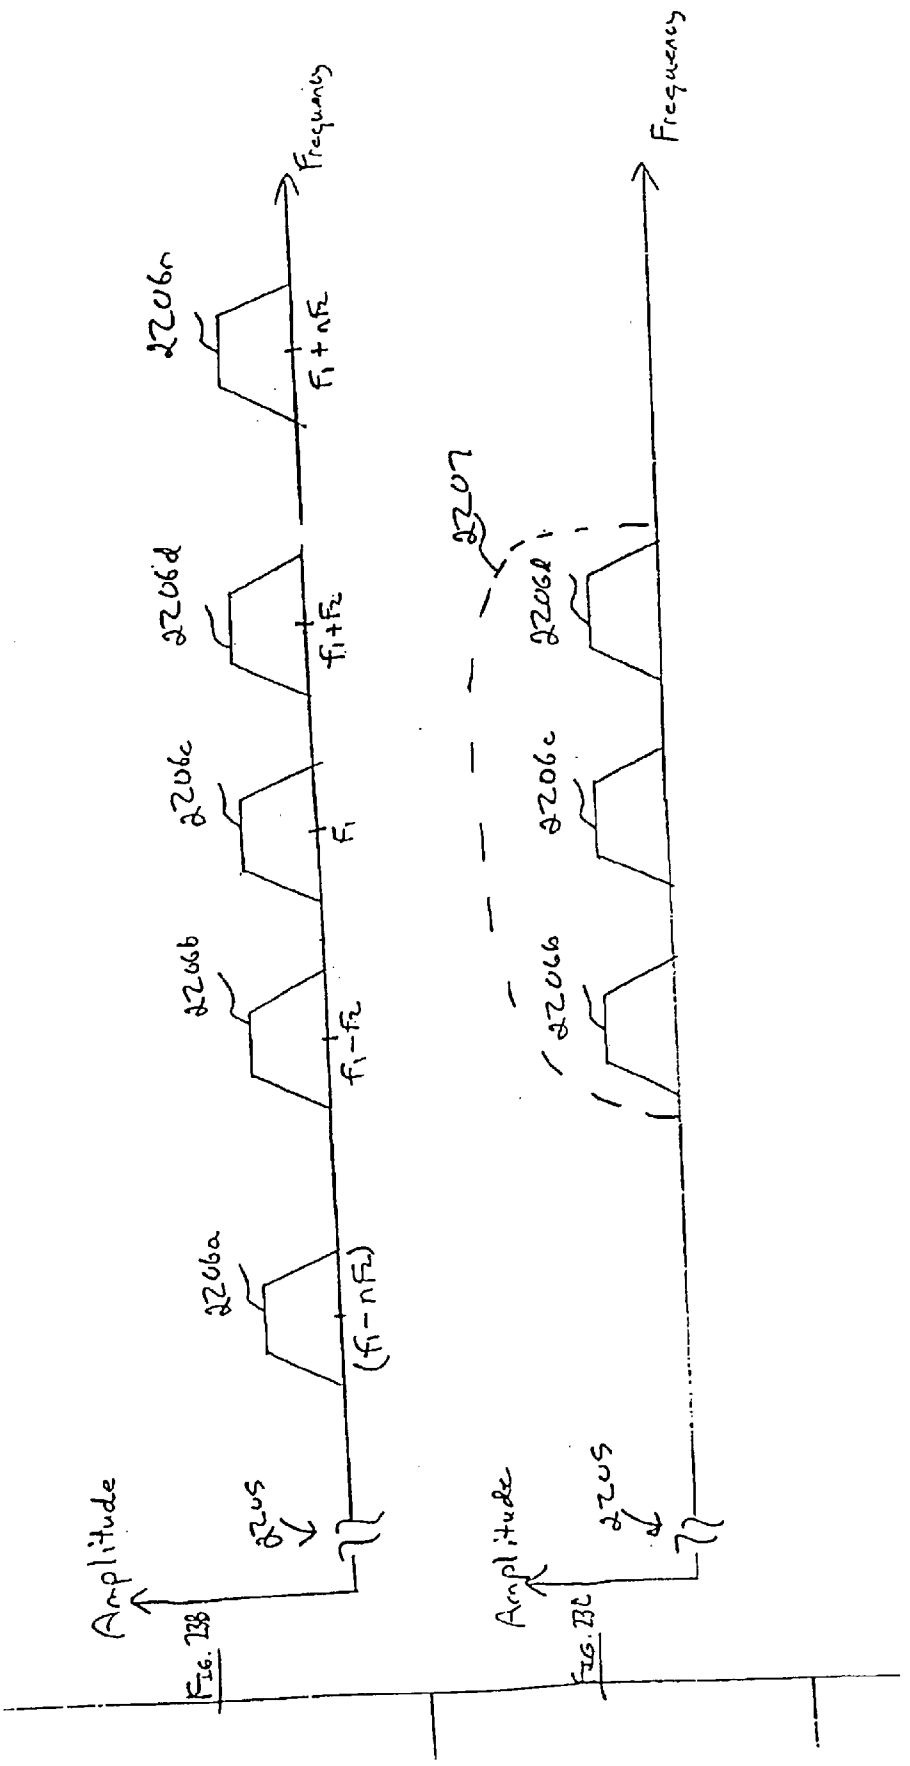


Fig. 12B

Fig. 12C

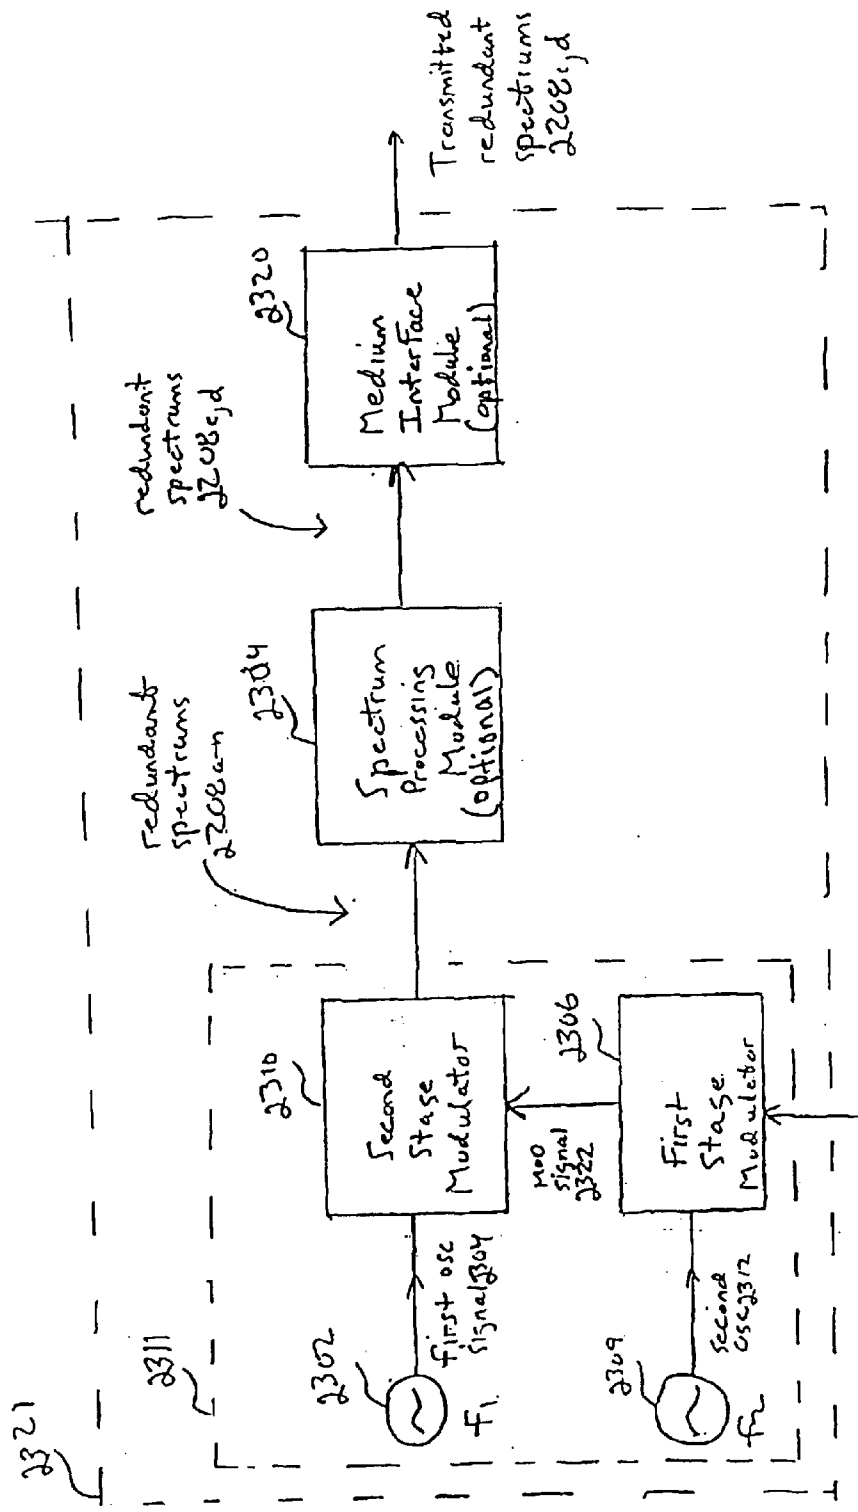

3321
3311
3302
f1
first osc signal 3304
3310
Second Stage Modulator
3306
LO signal 3312
First Stage Modulator
3309
f2
second osc 3312
modulating baseband signal 3262
redundant spectrums 3208a-n
3304
Spectrum Processing Module (optional)
redundant spectrums 3208'a-n
3320
Medium Interface Module (optional)
Transmitted redundant spectrums 3208'a-n

FIG. 23D

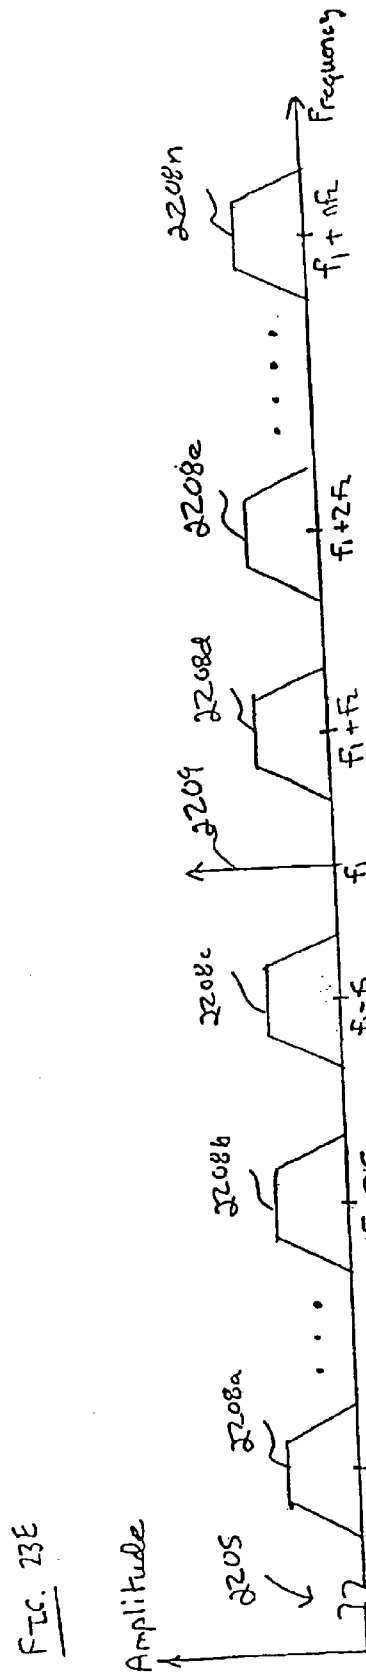


FIG. 23E

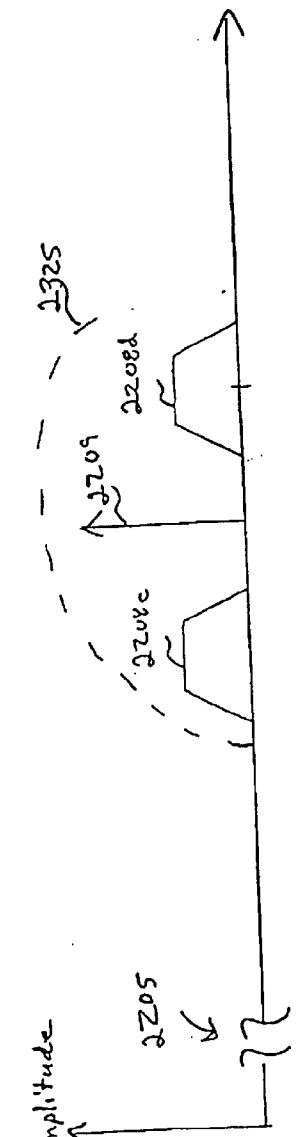


FIG. 23F

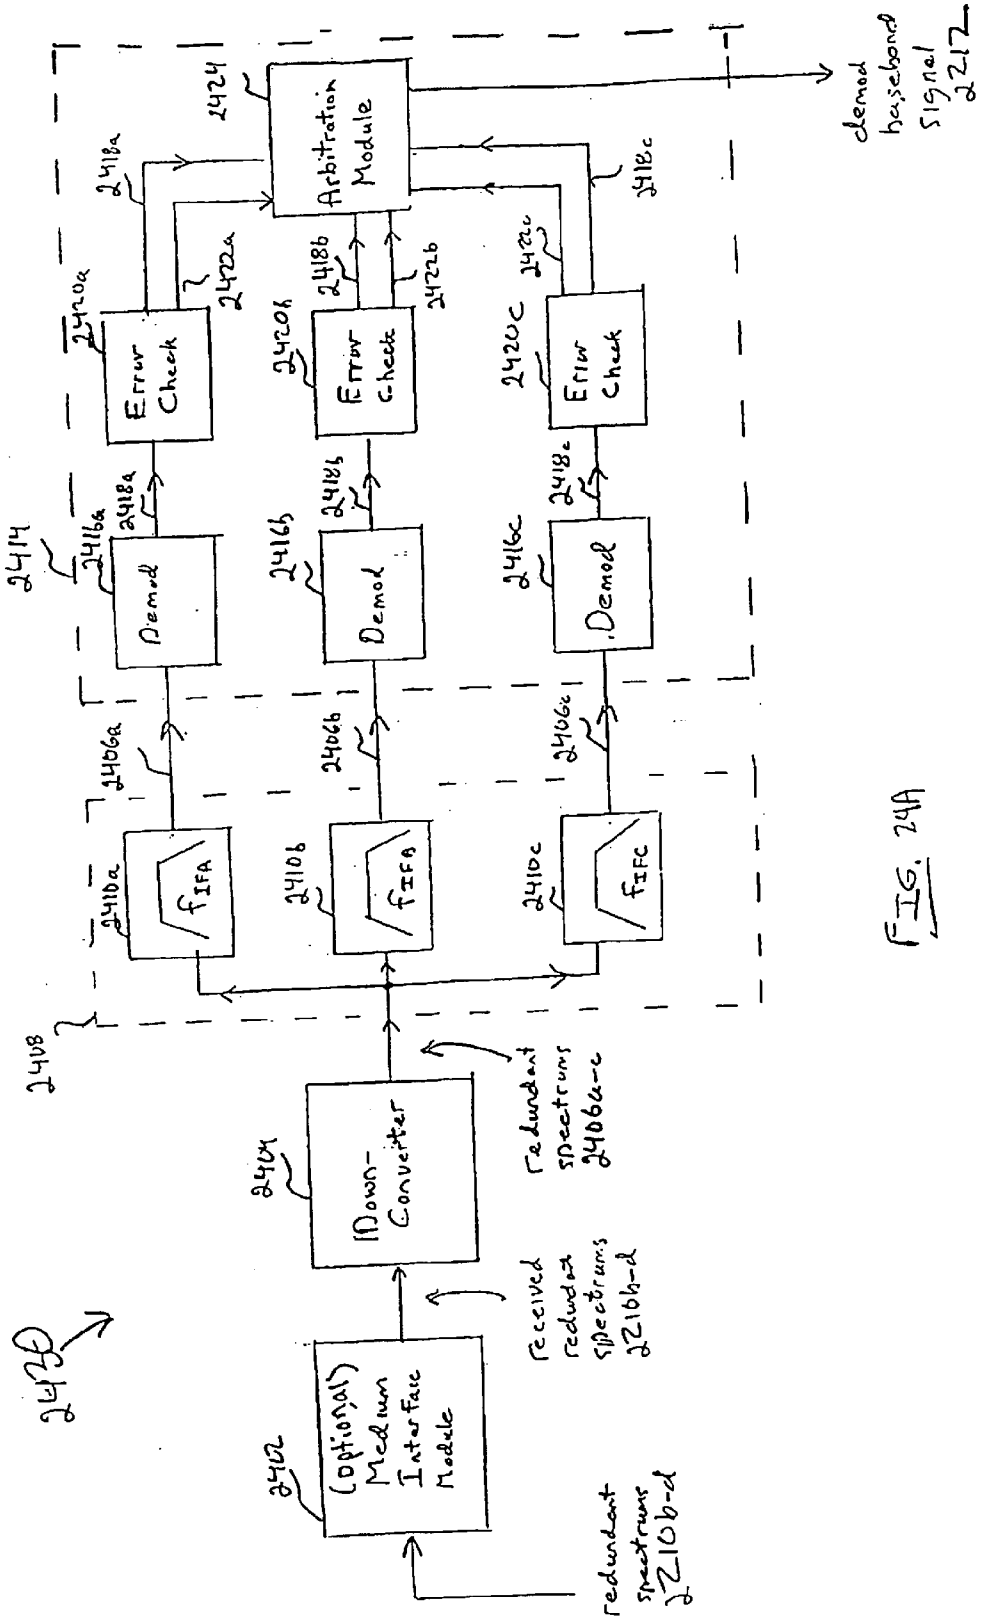

2428
(Optional) Medium Interface Module
2412
Down-Converter
2414
2418
FIFA
FIFB
FIFC
Demod
Demod
Demod
Error Check
Error Check
Error Check
Arbitration Module
received redundant spectrums 2210b-d
redundant spectrums 2406a-c
redundant spectrums 2210b-d
demod baseband signal 2217

FIG. 24A

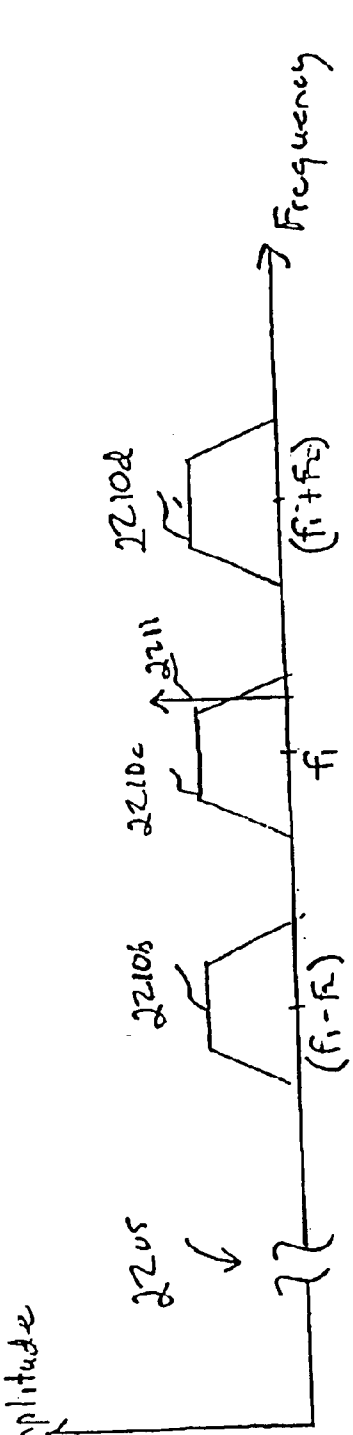


FIG. 24B

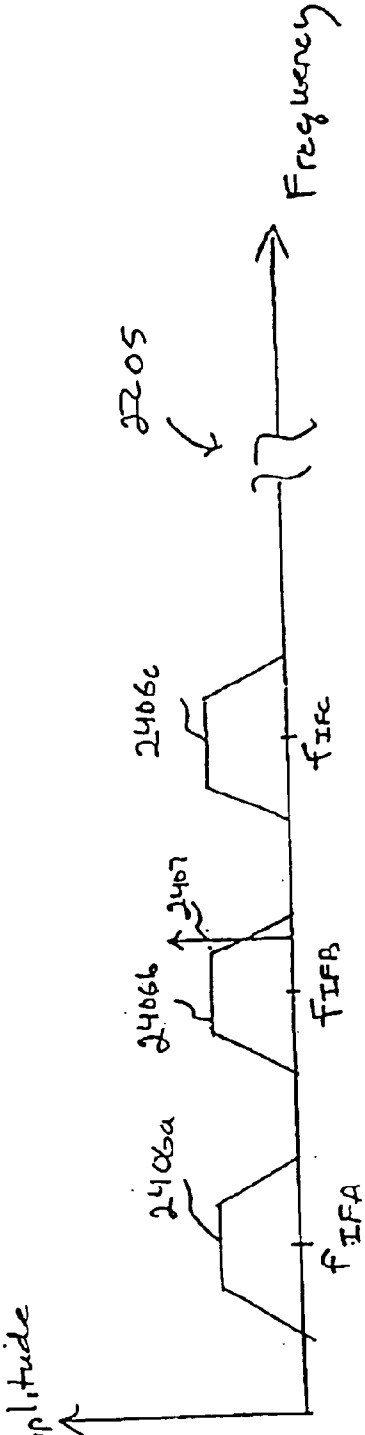


FIG. 24C

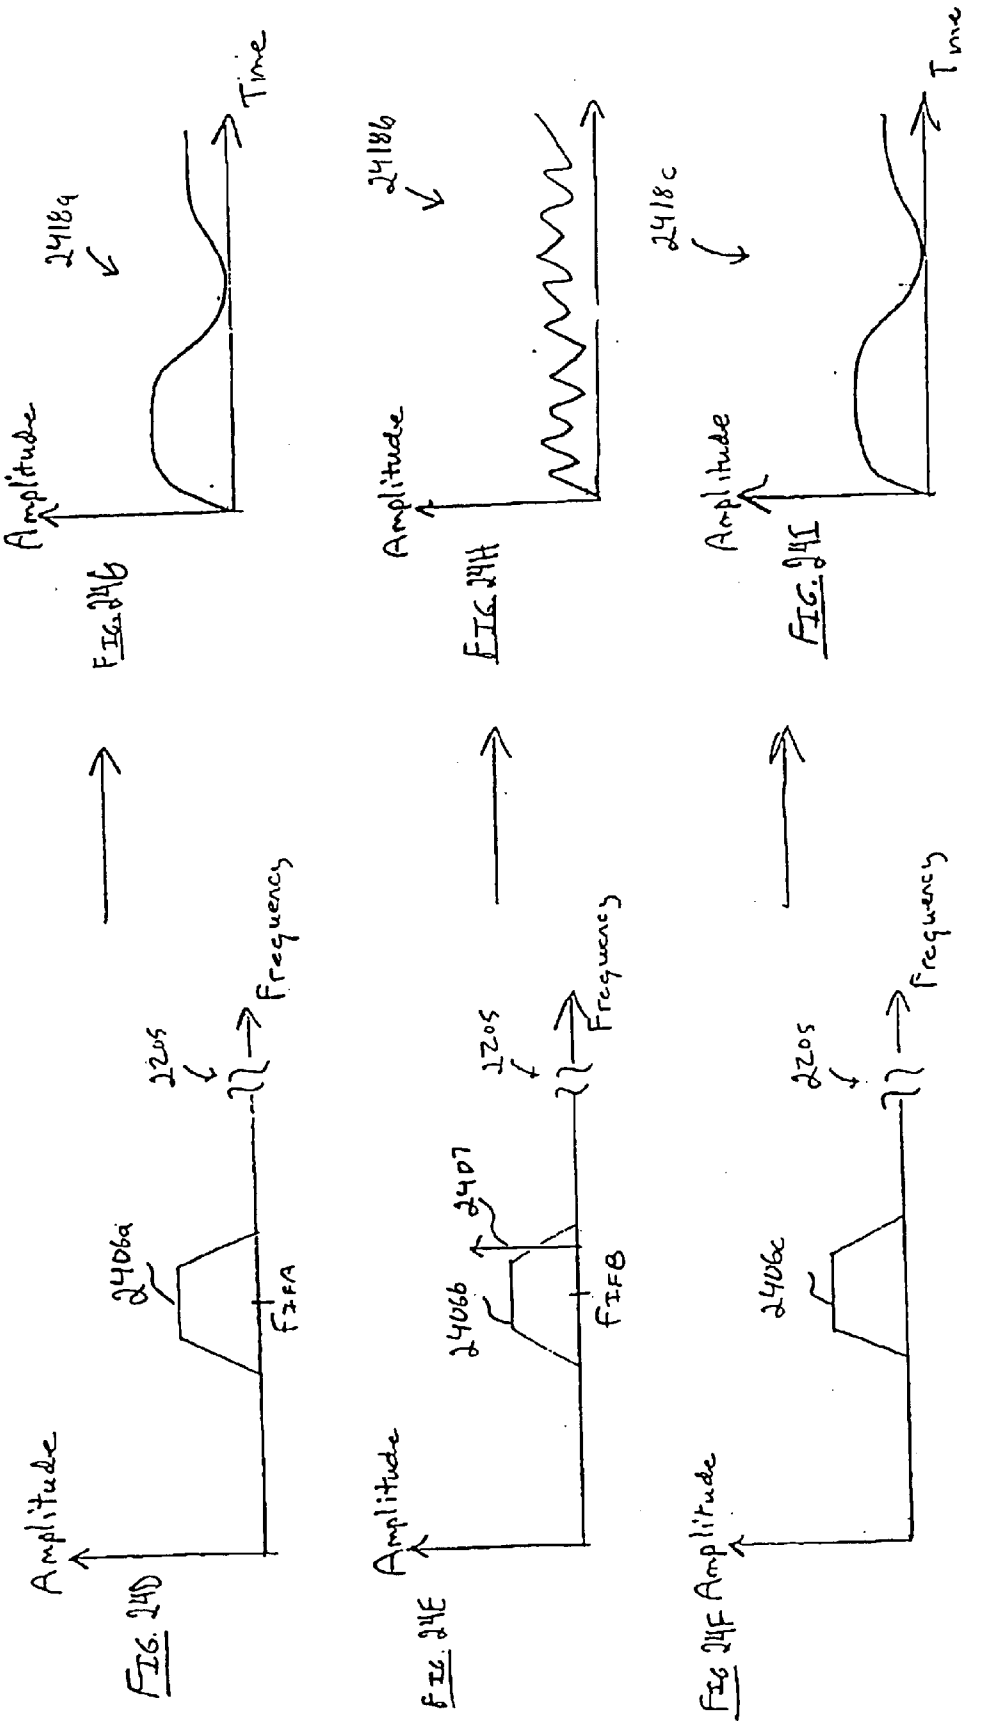


FIG. 24D FIG. 24E FIG. 24F FIG. 24G FIG. 24H FIG. 24I

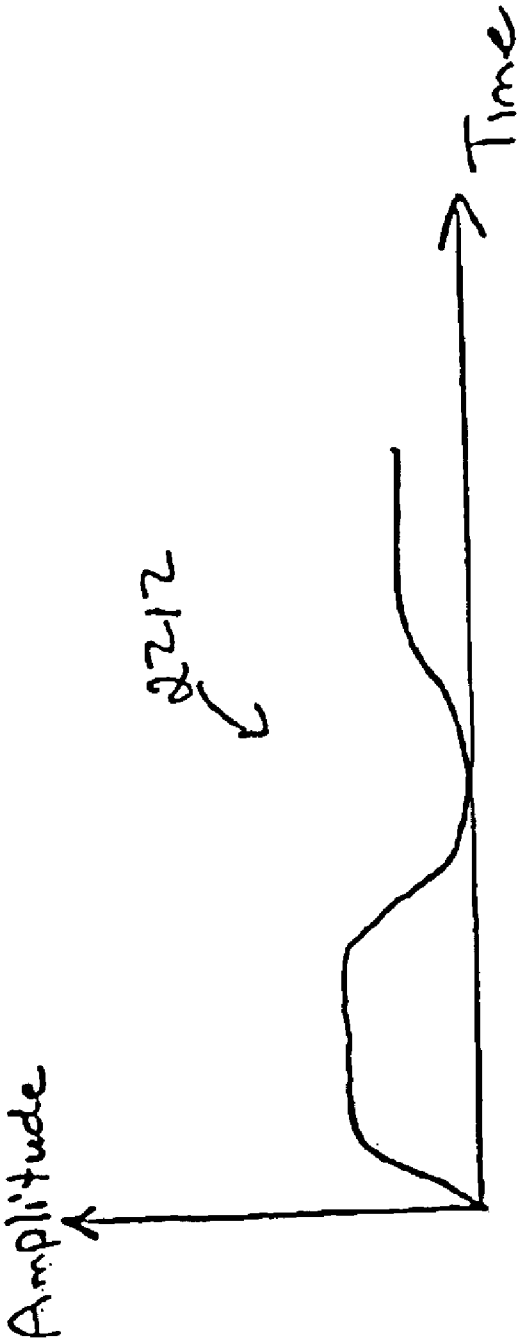


FIG. 24J

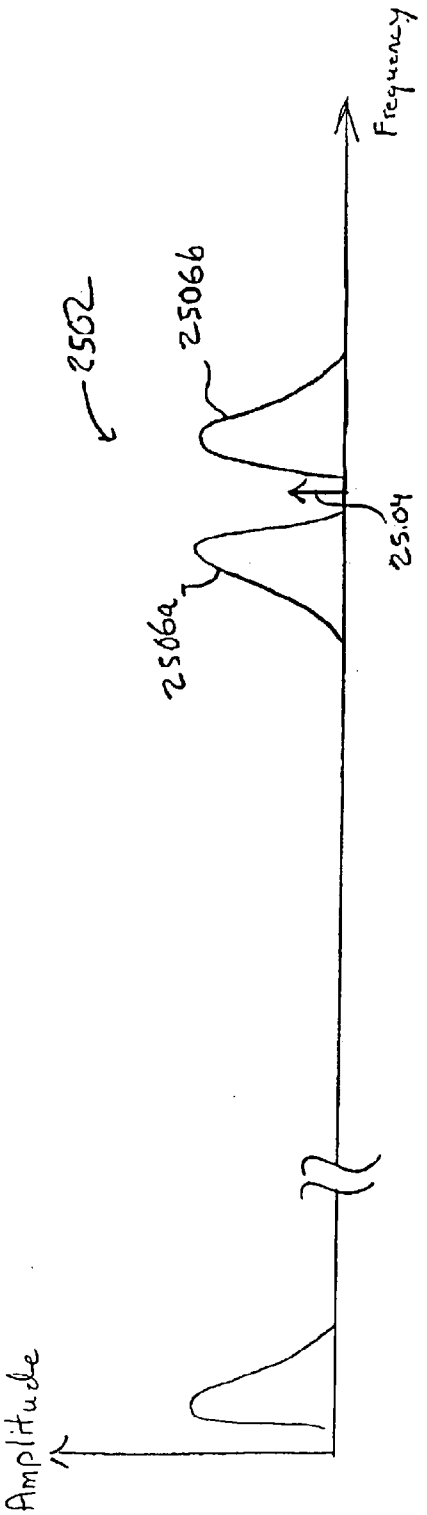


FIG. 25A

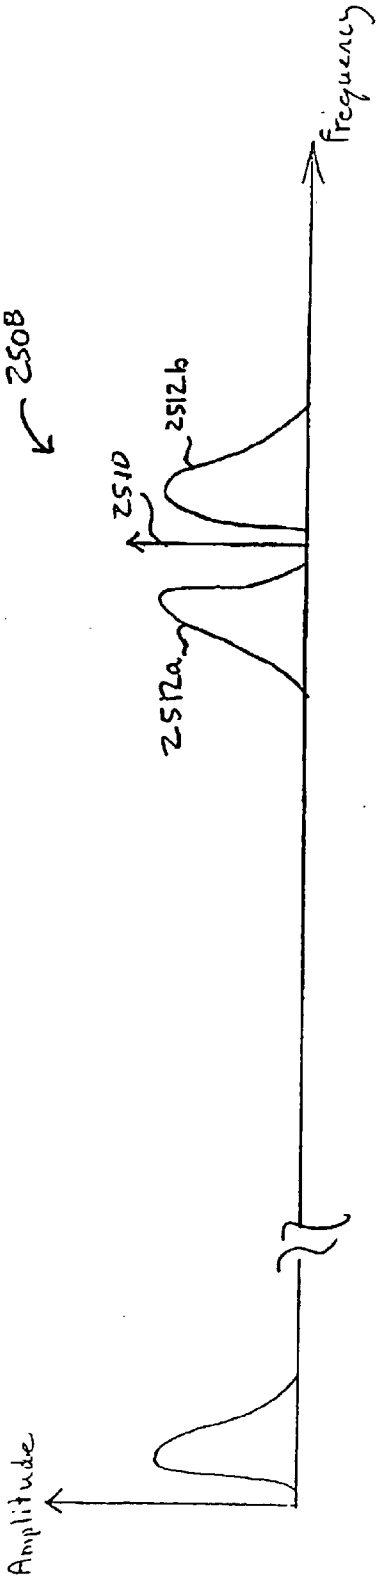


FIG. 25B

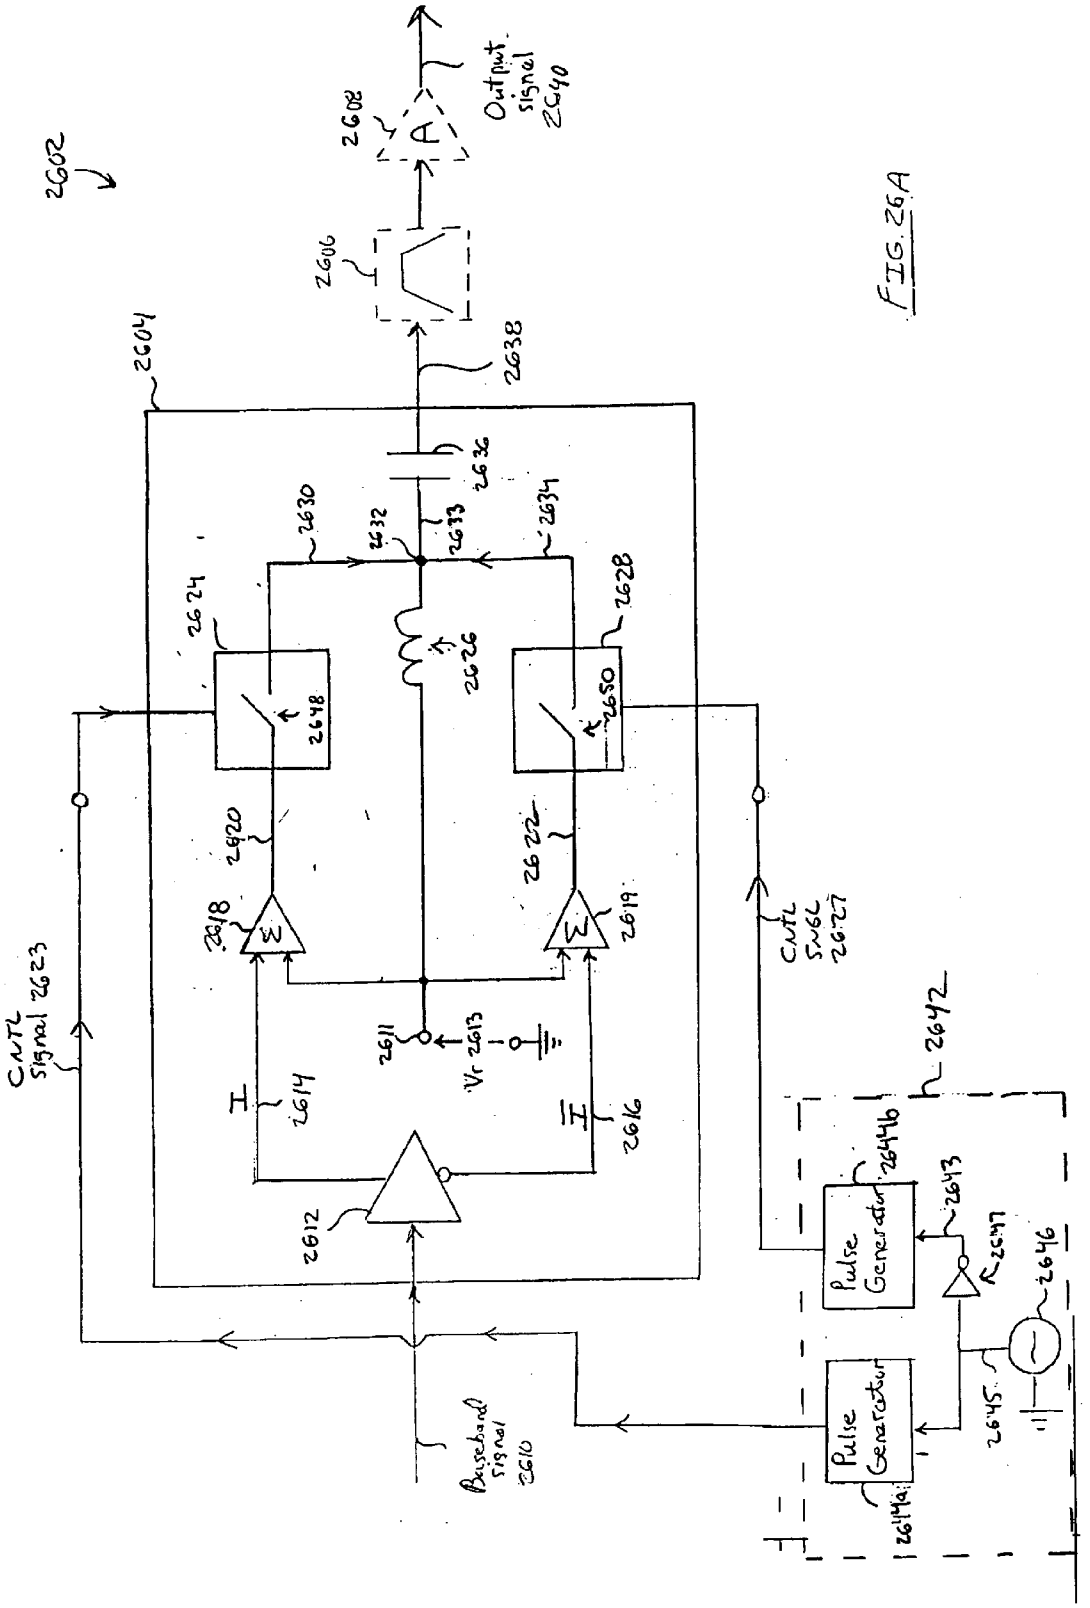

2602
2608
A
Output signal 2640
2606
2638
2604
2636
2630
2632
2633
2634
2624
2626
2628
2648
2650
2620
2622
2618
2619
Cntl signal 2623
Cntl signal 2627
2611
Vr 2613
2614
2616
2612
2642
Pulse Generator 2644b
2643
2647
2646
2645
Pulse Generator 2614a
Baseband signal 2610

FIG. 26A

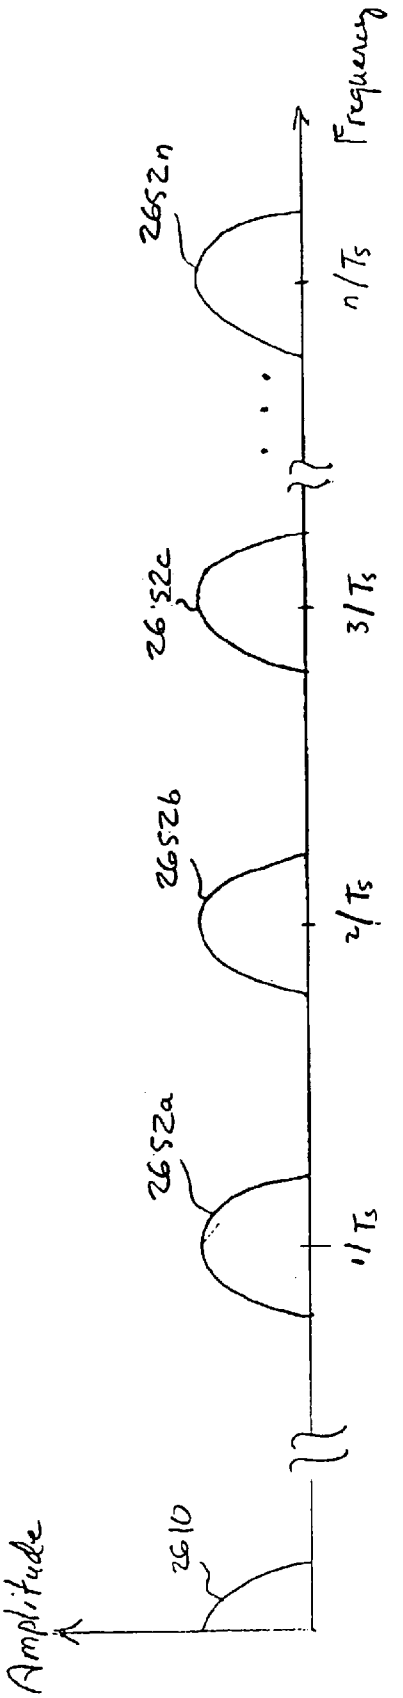

2630
Amplitude
Frequency
2610
2652a
2652b
2652c
2652n
1/Ts
2/Ts
3/Ts
n/Ts

FIG. 26B



2633, 2638
2610
Amplitude
2654a
1/Ts
2654b
2/Ts
2654c
3/Ts
2656
2654n
n/Ts
Frequency

FIG. 26C



2662
2604
2606
2608
A
Output signal 2640
2638
2636
2630
2632
2633
2634
2624
2648
2628
2650
2626
2668
2660
2620
2622
2618
2619
CNTL Signal 2623
CNTL SIG 2627
2611
Vr 2613
2614
2616
2612
2642
Pulse Generator 2644b
2643
2647
2646
2645
Pulse Generator 2644a
Baseband signal 2610

FIG. 26D

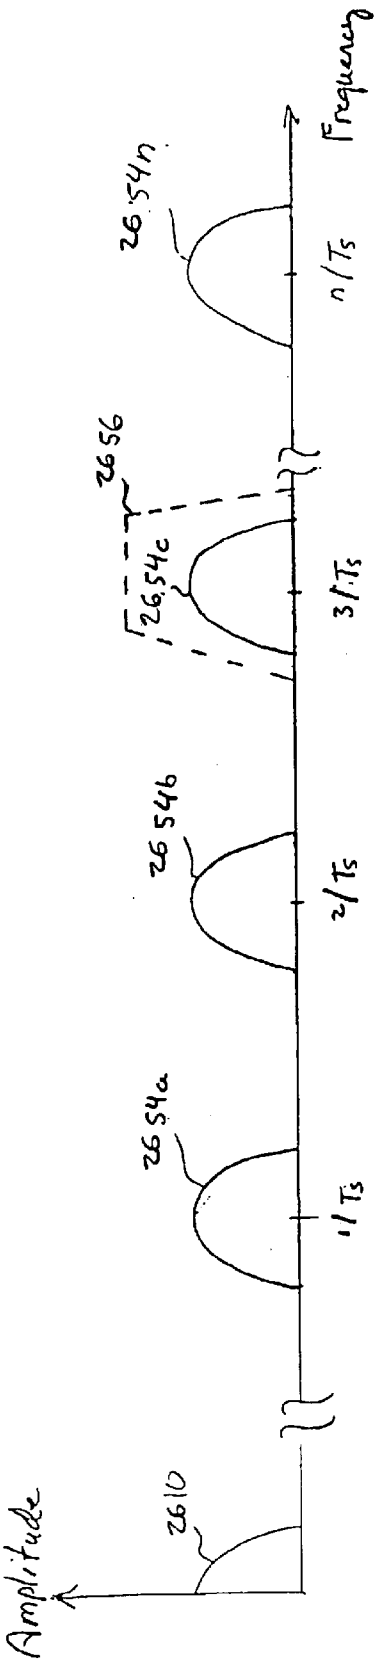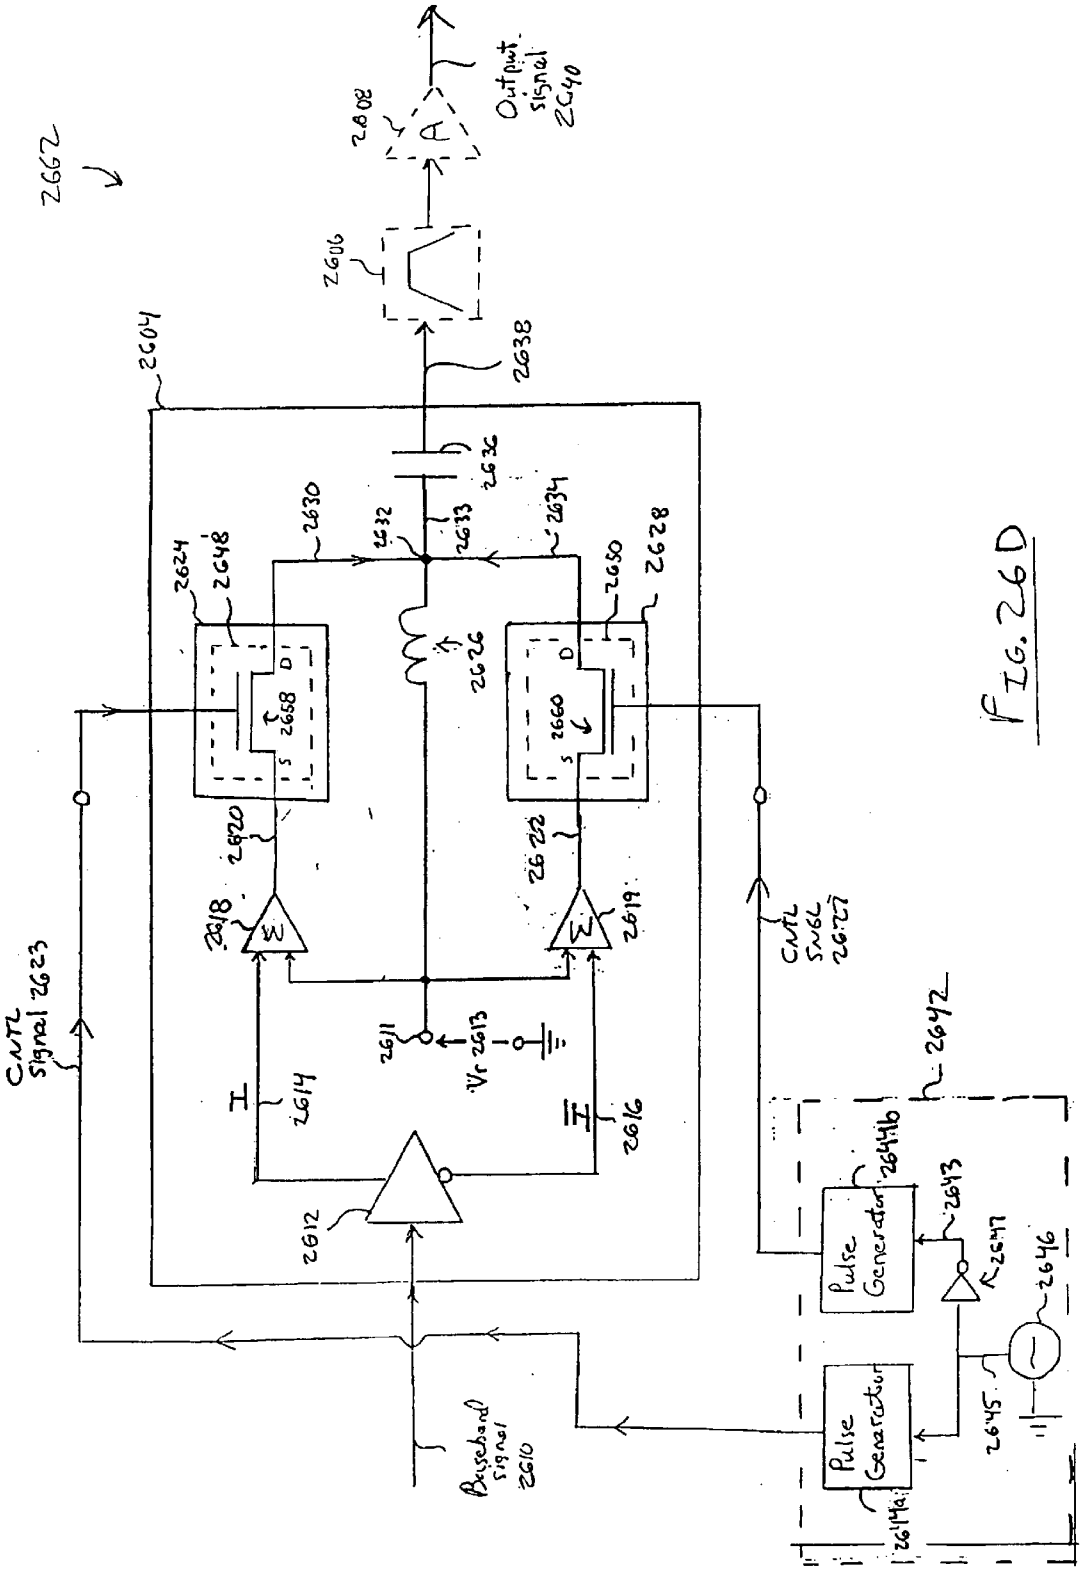FIG. 27A

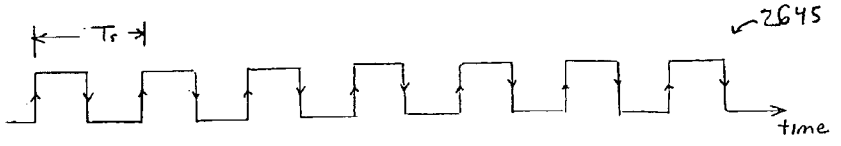


FIG. 27B

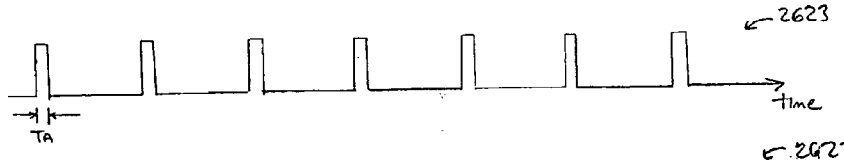


FIG. 27C

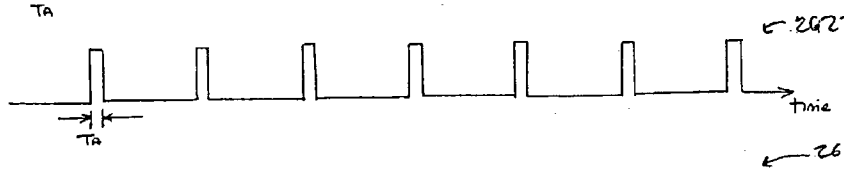


FIG. 27D

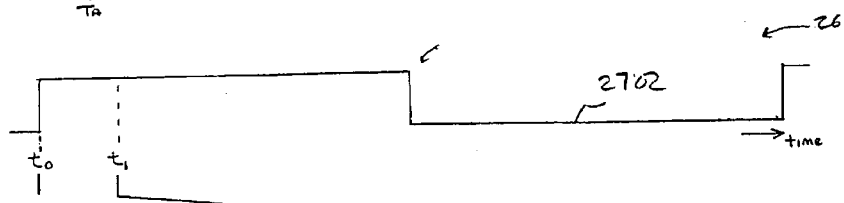


FIG. 27E

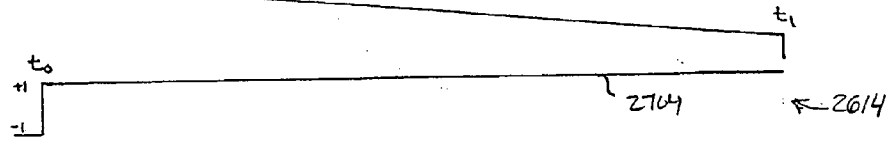


FIG. 27F





FIG. 27G

FIG. 27H

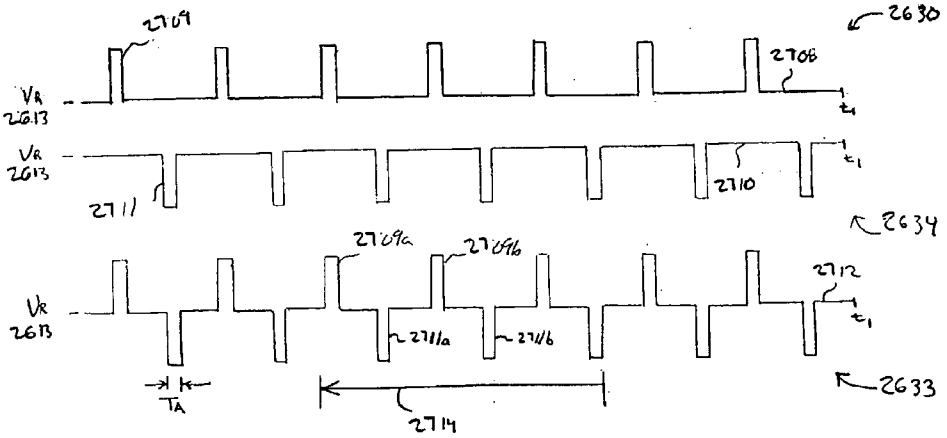FIG. 27I



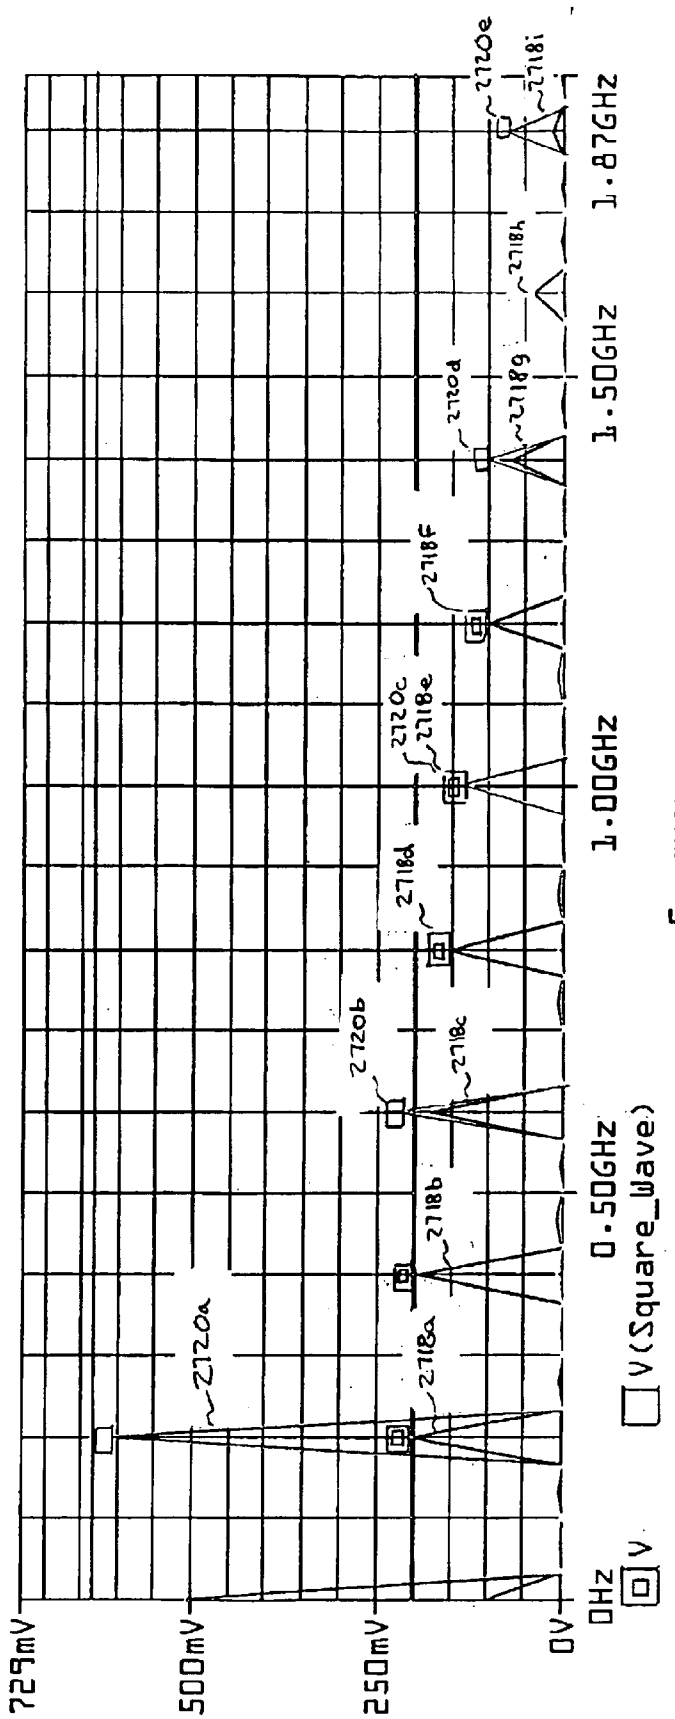

Square Wave Frequency = 200Mhz
Aperture = 500ps
Fundamental Clock = 200Mhz (5th Subharmonic)
729mV
500mV
250mV
0V
0Hz
0.50GHz
1.00GHz
1.50GHz
1.87GHz
Frequency
V
V(Square_Wave)
2120a
2120b
2120c
2120d
2120e
2118a
2118b
2118c
2118d
2118e
2118f
2118g
2118h
2118i

FIG. 27J

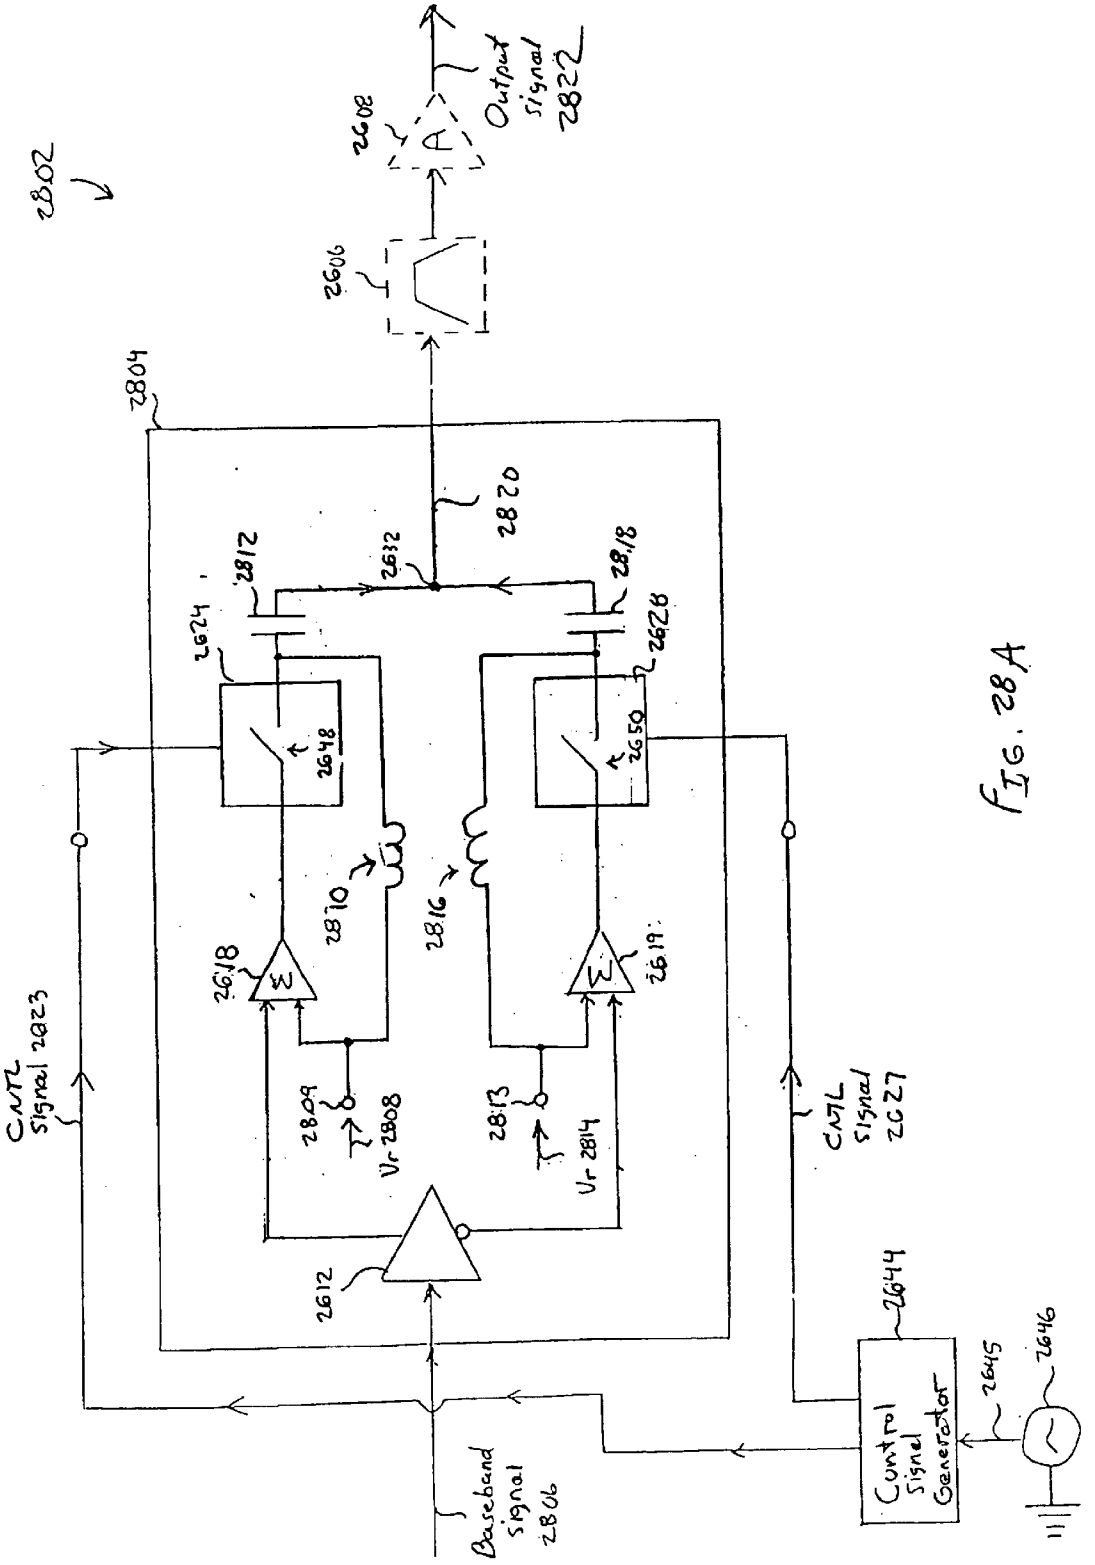

2802
2804
2606
2608
Output signal 2822
2820
2812
2632
2818
2624
2628
2648
2650
2610
2816
2618
2619
2809
2808
Vr 2808
2813
2814
Vr 2814
2612
CNTL signal 2823
CNTL signal 2627
Baseband signal 2806
2644
Control signal Generator
2645
2646

FIG. 28A

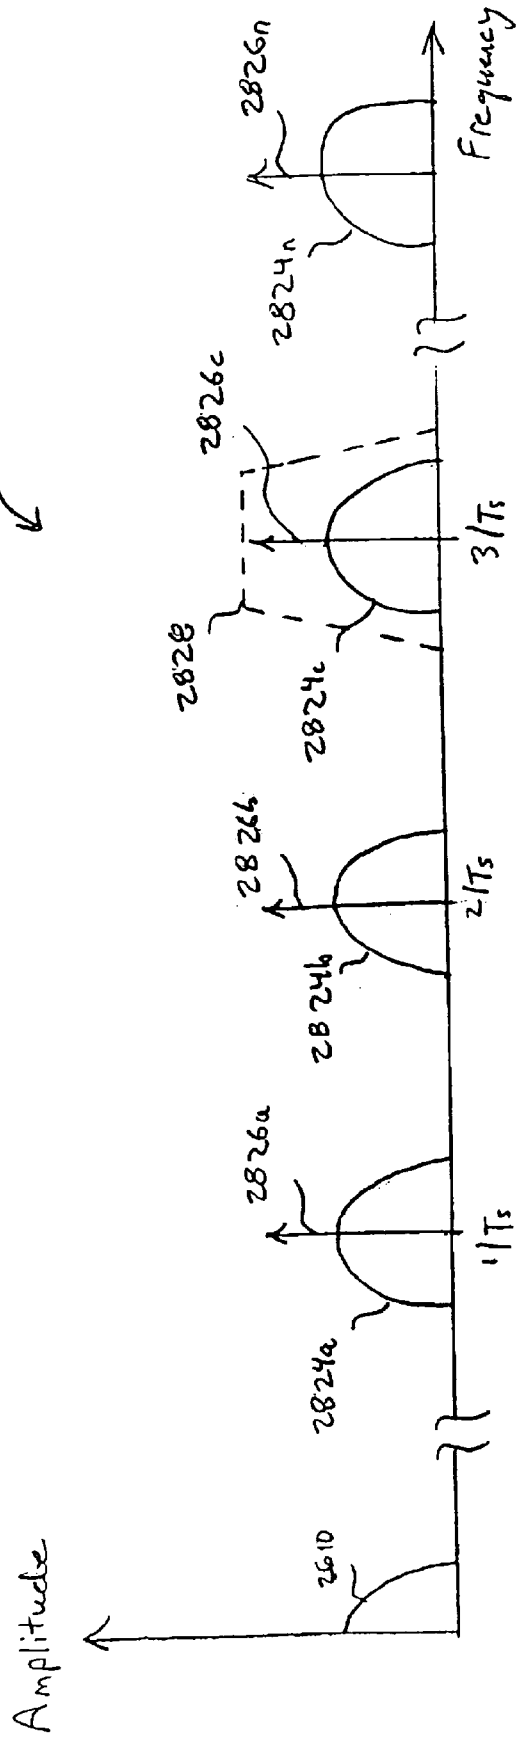

2820
Amplitude
Frequency
2610
2824a
2826a
1/Ts
2824b
2826b
2/Ts
2828
2824c
2826c
3/Ts
2824n
2826n

FIG. 28B

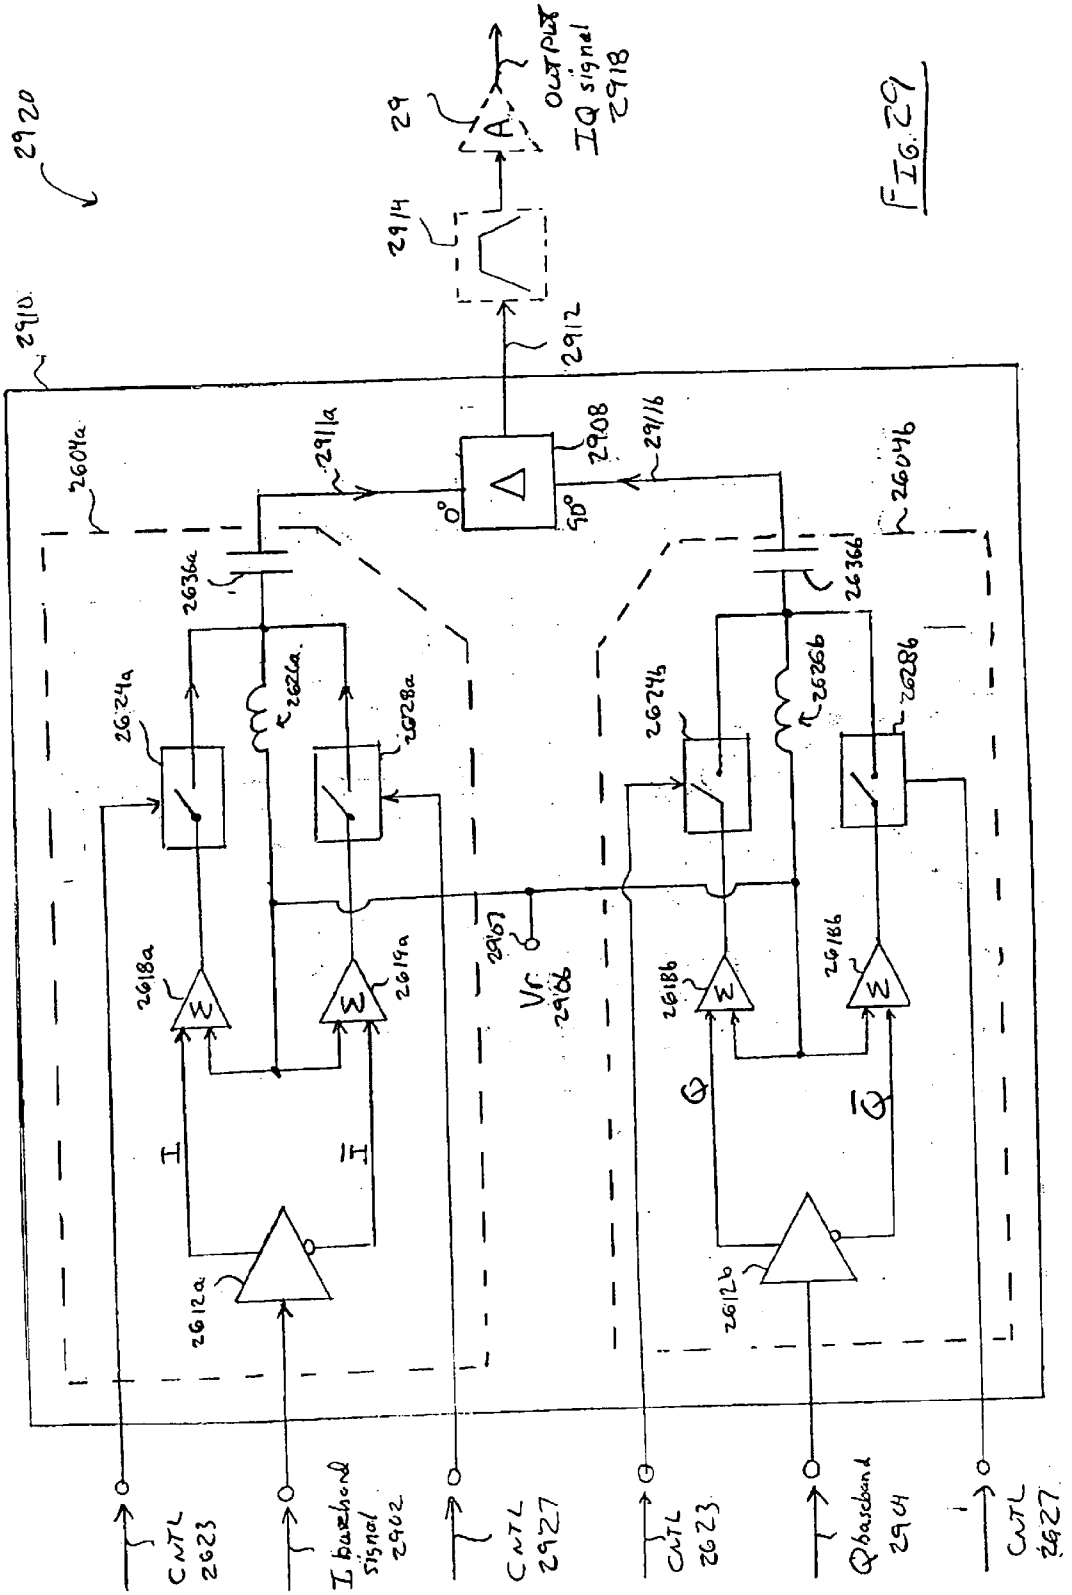
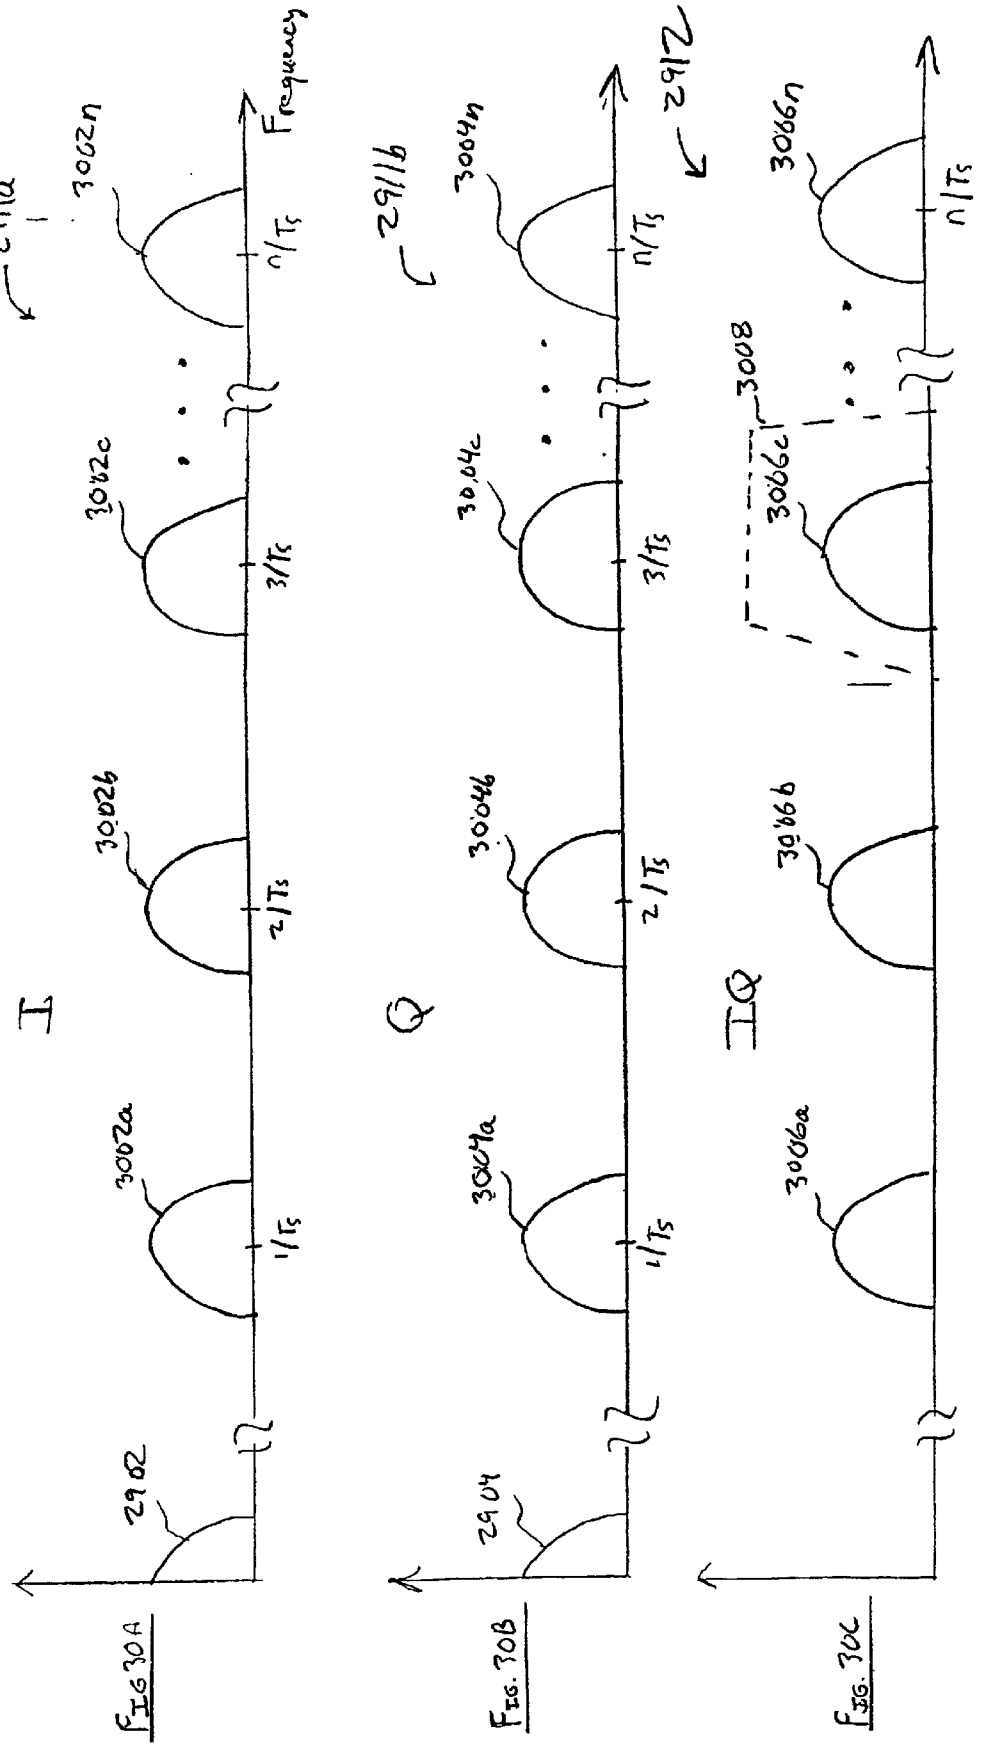

2920
2910
2914
29
A
OUTPUT
IQ signal
2918
2912
2604a
2911a
2908
2916
2604b
0°
90°
2636a
2636b
2624a
2624b
2628a
2628b
2618a
2619a
2618b
2619b
2612a
2612b
2907
Vr
2906
I
Q
CNTL
2623
I baseband
signal
2902
CNTL
2927
CNTL
2623
Q baseband
2904
CNTL
2627

FIG. 29


I
2911a
3002a
3002b
3002c
3002n
2902
1/Ts
2/Ts
3/Ts
n/Ts
Frequency
FIG. 30A
Q
2911b
3004a
3004b
3004c
3004n
2904
2912
FIG. 30B
IQ
3006a
3006b
3006c
3006n
3008
FIG. 30C

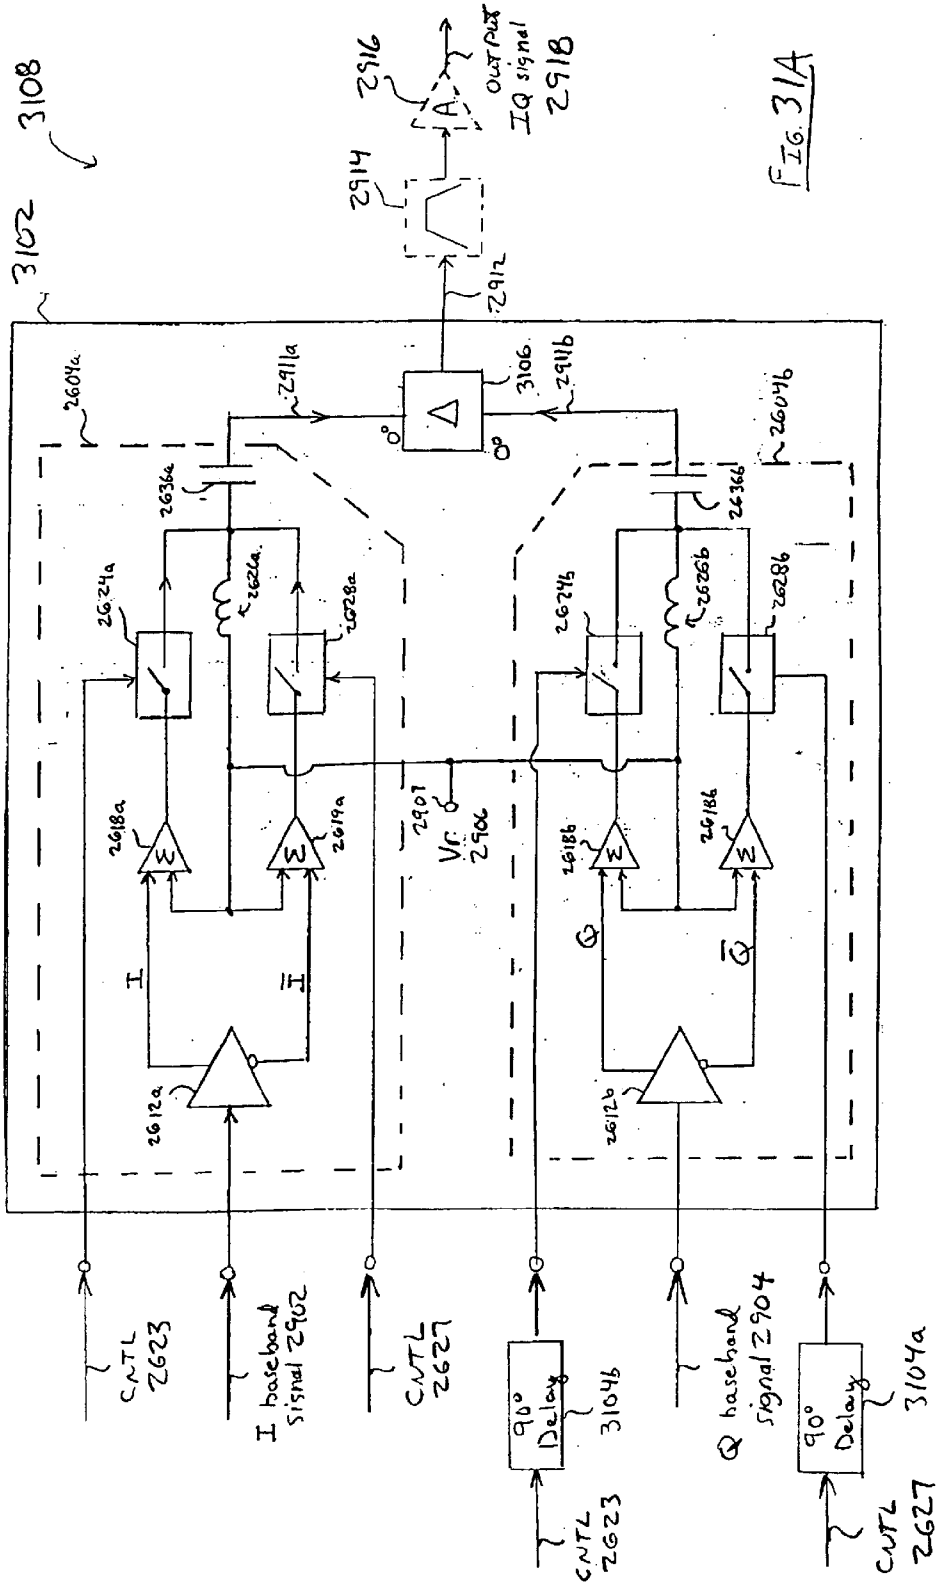

3108
3102
2916
2914
2912
IQ signal
2918
2911a
2911b
3106
2604a
2604b
2636a
2636b
2624a
2624b
2626a
2626b
2628a
2628b
2618a
2618b
2619a
2619b
2901
Vc
2906
2612a
2612b
I
Q
CNTL
2623
I baseband
signal 2902
CNTL
2627
90°
Delay
3104b
Q baseband
signal 2904
3104a

FIG. 31A

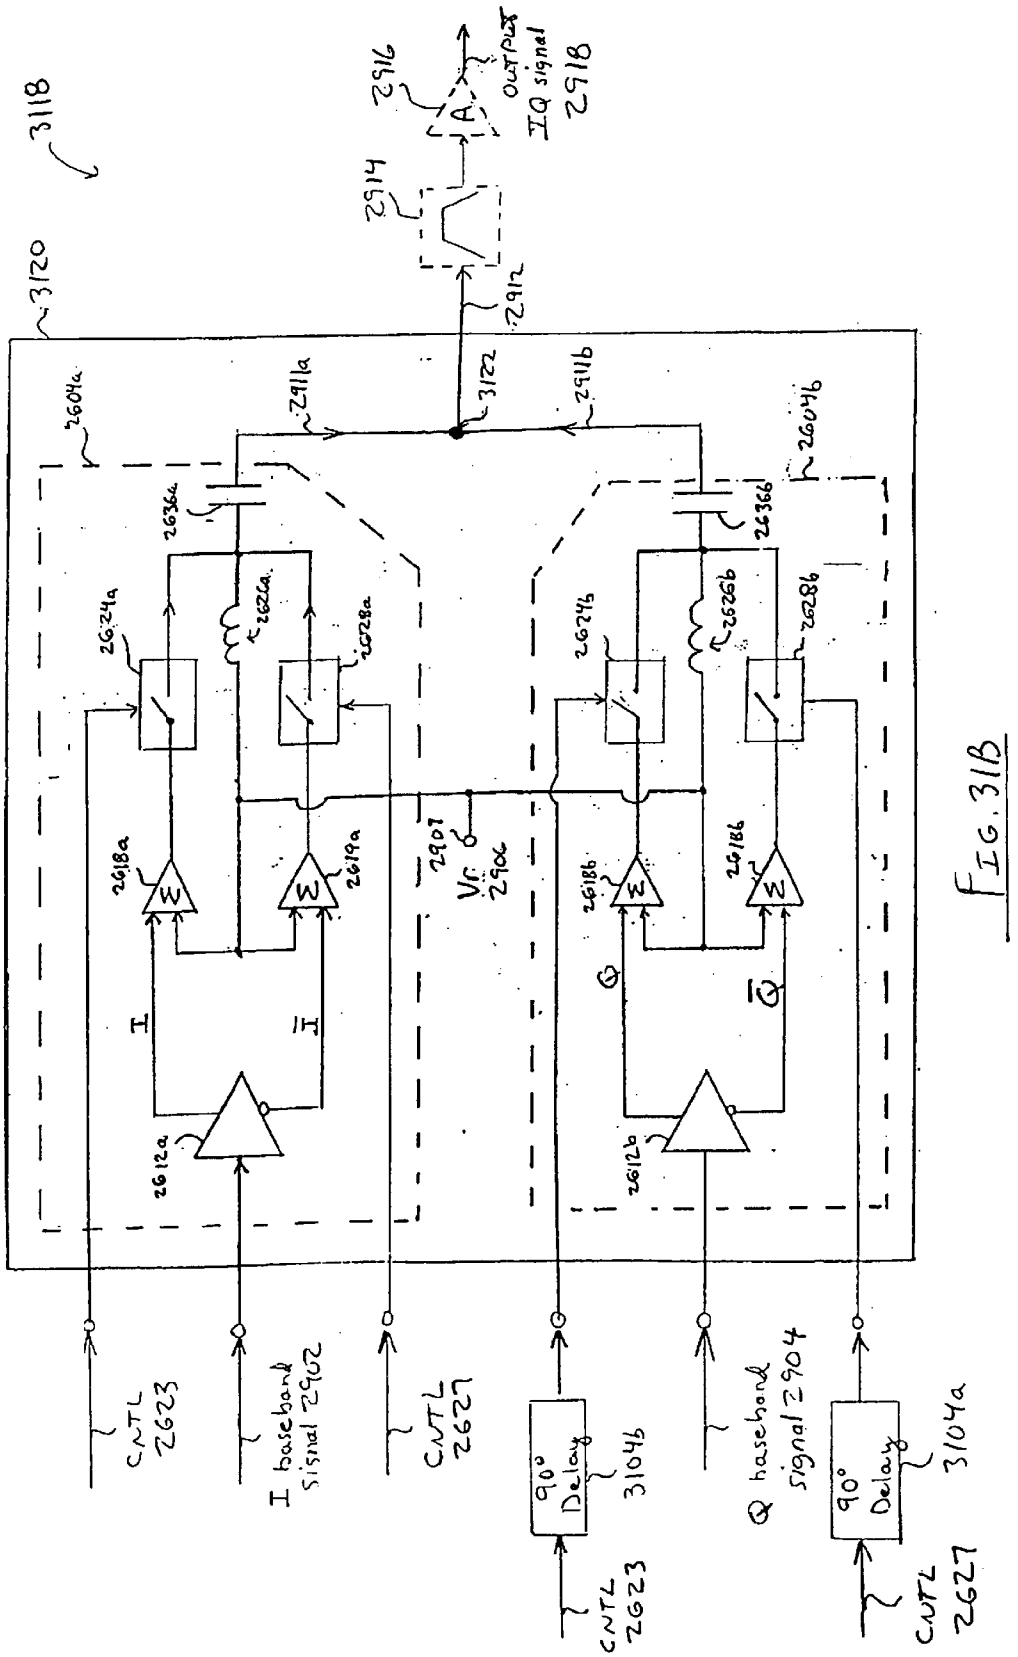

3118
3120
2916
2914
2912
3122
2918
IQ signal
output
2911a
2911b
2604a
2604b
2636a
2636b
2624a
2624b
2626a
2626b
2628a
2628b
2618a
2618b
2619a
2619b
2612a
2612b
2907
Vr
2906
I
Q
CNTL 2623
I baseband signal 2902
CNTL 2627
90° Delay
3104b
Q baseband signal 2904
3104a

FIG. 31B

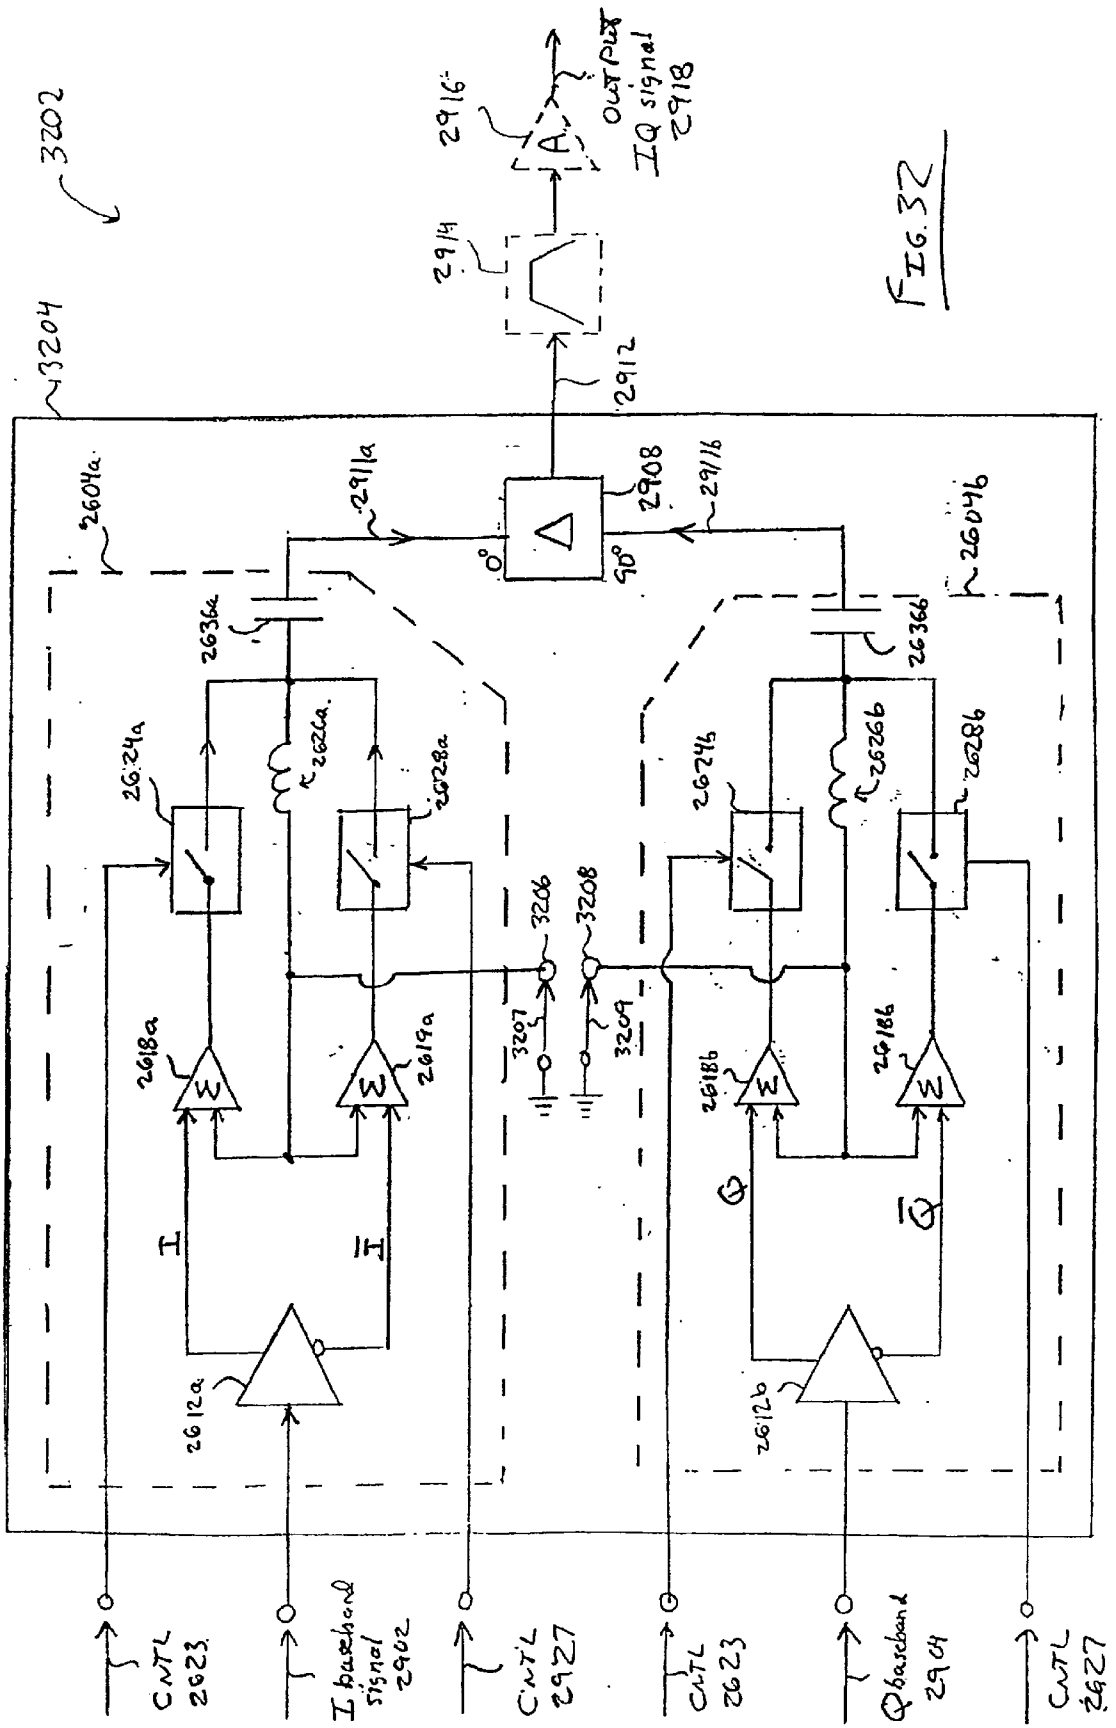

3202
3204
2916
output IQ signal 2918
2914
2912
2908
2911a
2911b
0°
90°
2604a
2604b
2636a
2636b
2624a
2624b
2622a
2622b
2628a
2628b
2626a
2626b
2628b
3206
3208
3207
3209
2618a
2618b
2619a
2619b
2612a
2612b
I
Q
CNTL 2623
I baseband signal 2902
CNTL 2927
CNTL 2623
Q baseband 2904
CNTL 2627

FIG. 32

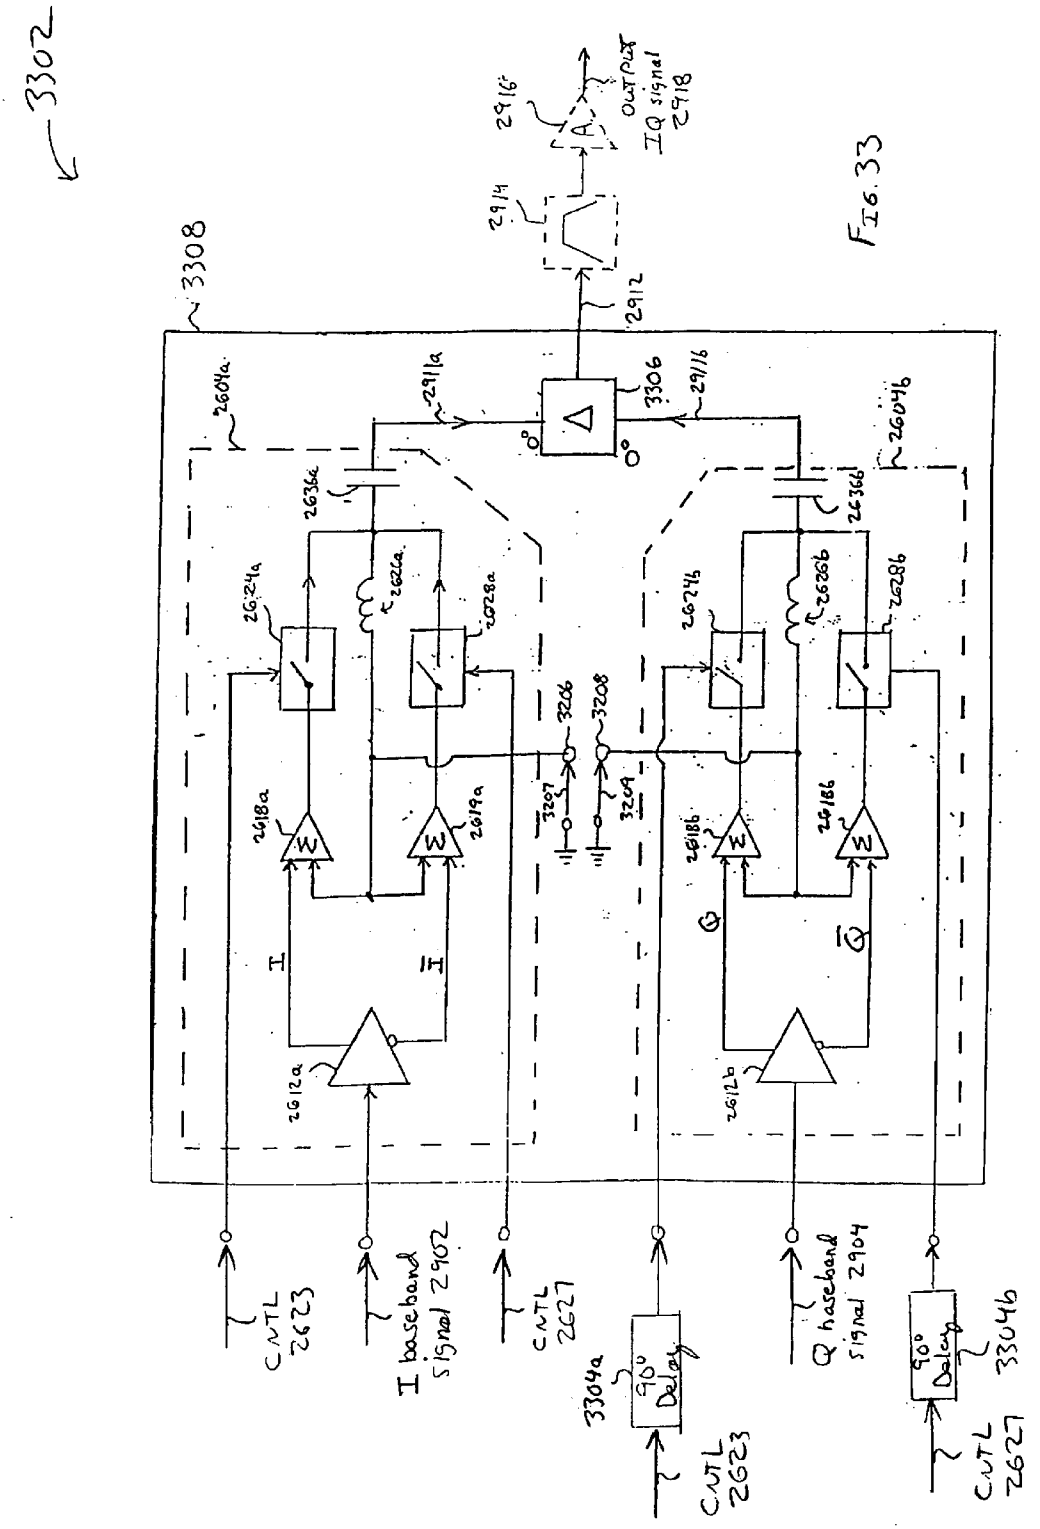

3302
3308
2916
2914
2912
IQ signal 2918
output
3306
2911a
2911b
2609a
2609b
2636a
2636b
2624a
2624b
2622a
2628a
2626a
2626b
2628b
3206
3208
3207
3209
2618a
2619a
2618b
2619b
2612a
2612b
I
Q
CNTL 2623
I baseband signal 2902
CNTL 2627
3304a
90° Delay
CNTL 2623
Q baseband signal 2904
90° Delay
3304b
CNTL 2627

FIG. 33

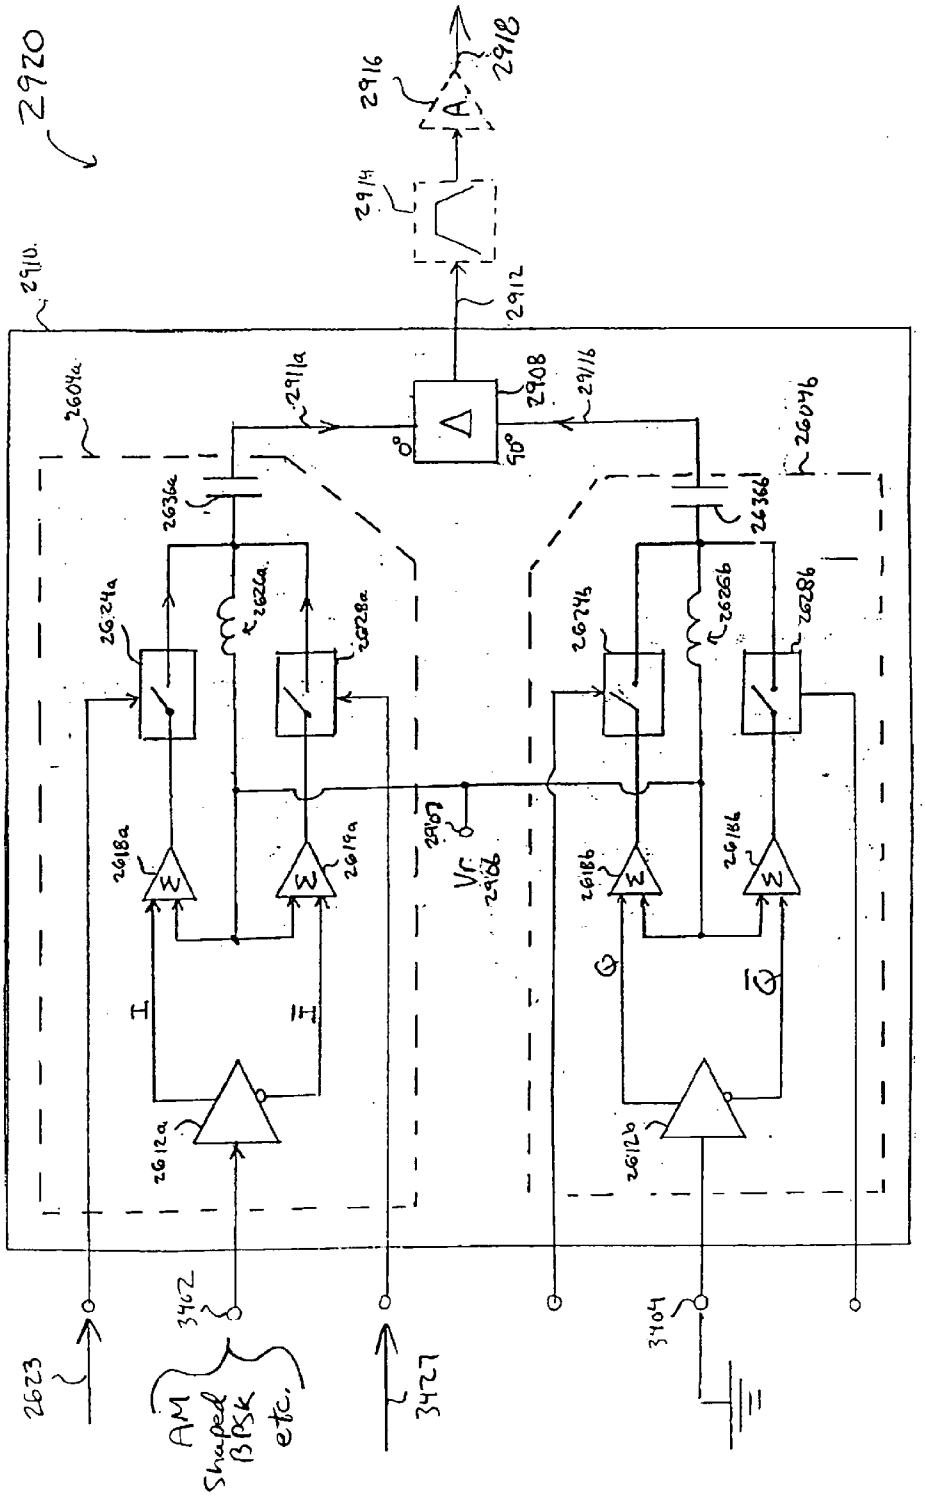

2920
2916
2918
2914
2910
2912
2908
2911a
2911b
2604a
2604b
2636a
2636b
2624a
2624b
2626a
2626b
2628a
2628b
2618a
2618b
2619a
2619b
2612a
2612b
2907
Vr
2906
I
II
Q
$\bar{Q}$
2623
3402
3404
3427
AM
Shaped
BPSK
etc.

FIG 34A

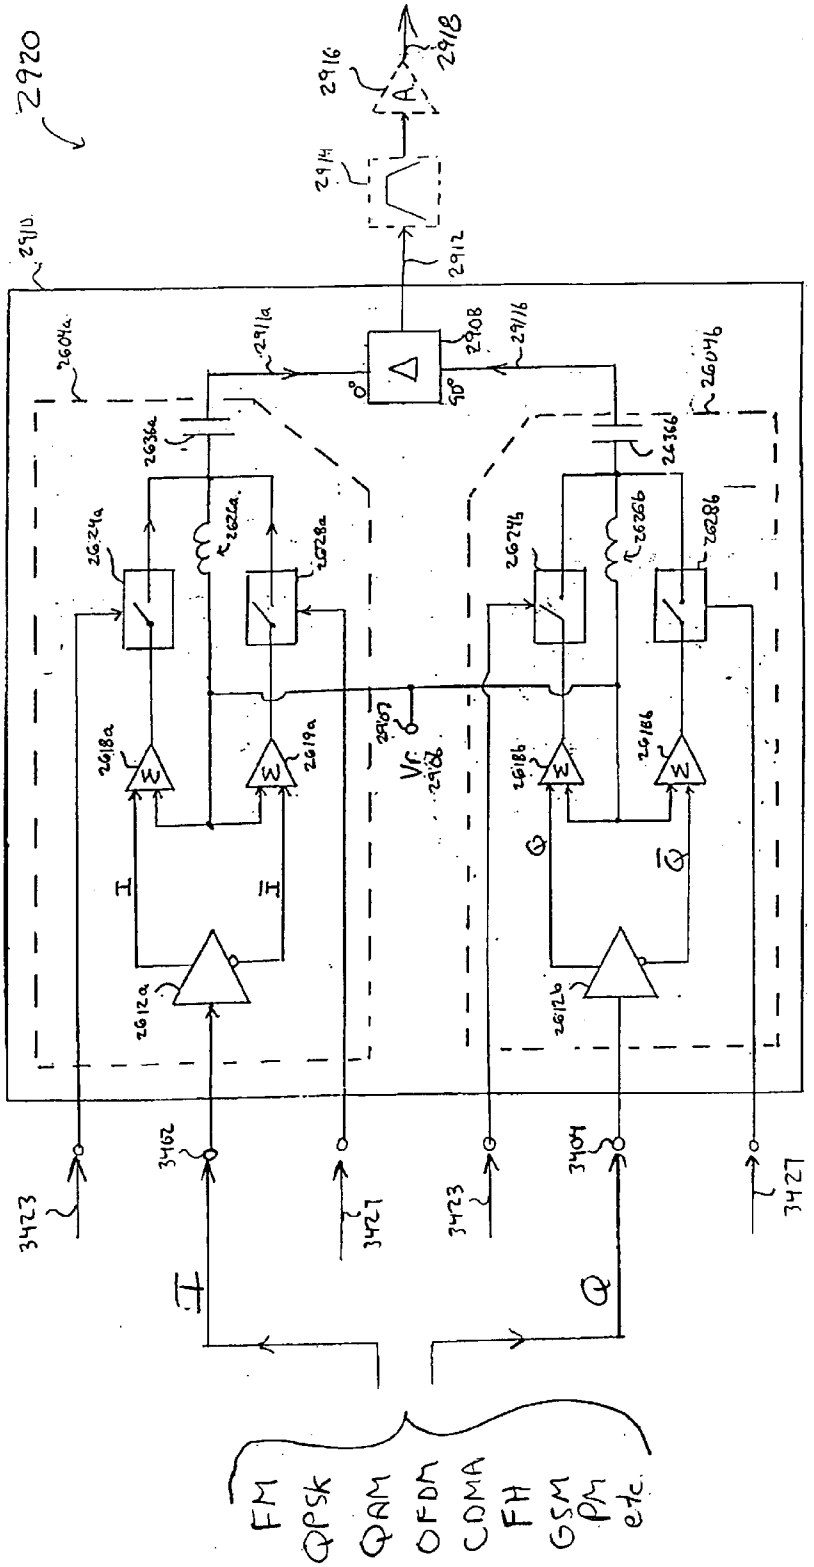

2920
2916
2918
2914
2912
2910
2908
0°
90°
Vc
FM
QPSK
QAM
OFDM
CDMA
FH
GSM
PM
etc.

FIG. 34B

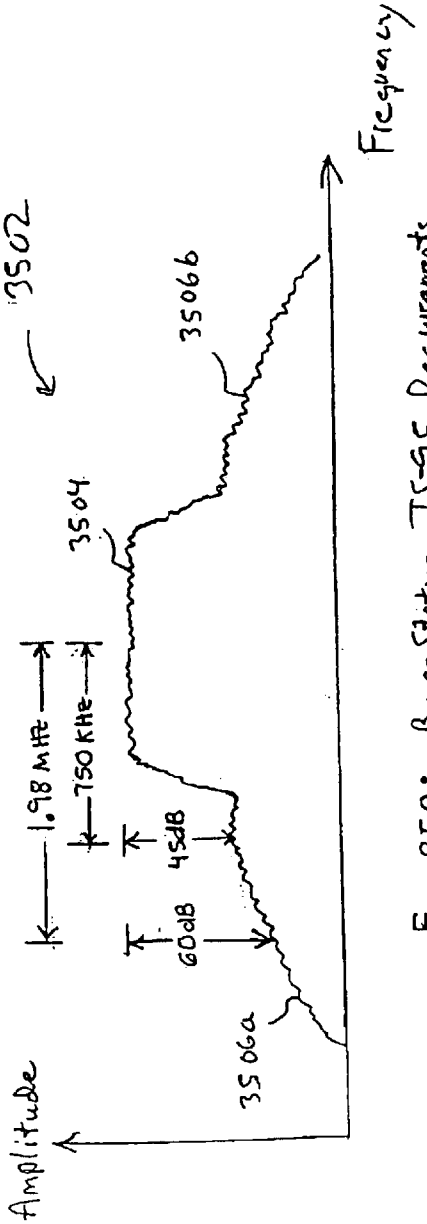


FIG. 35A: Base Station IS-95 Requirements

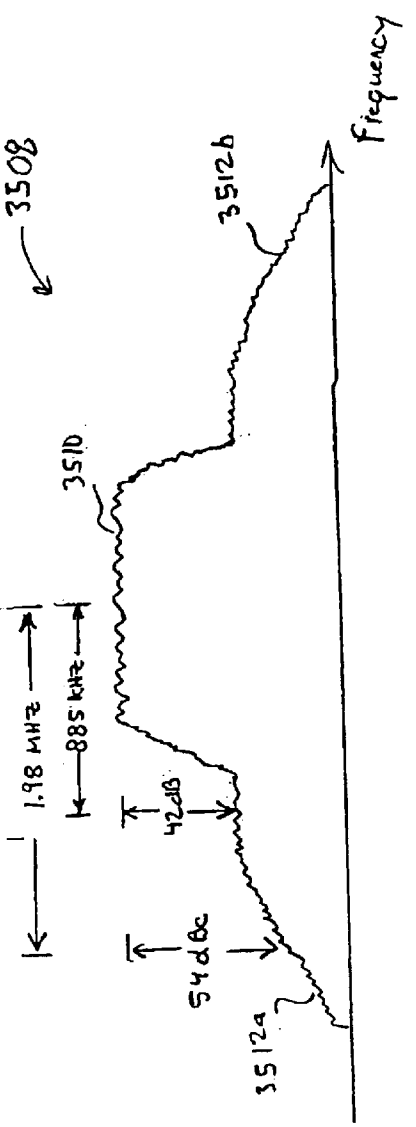


FIG. 35B: Mobile IS-95 Requirements

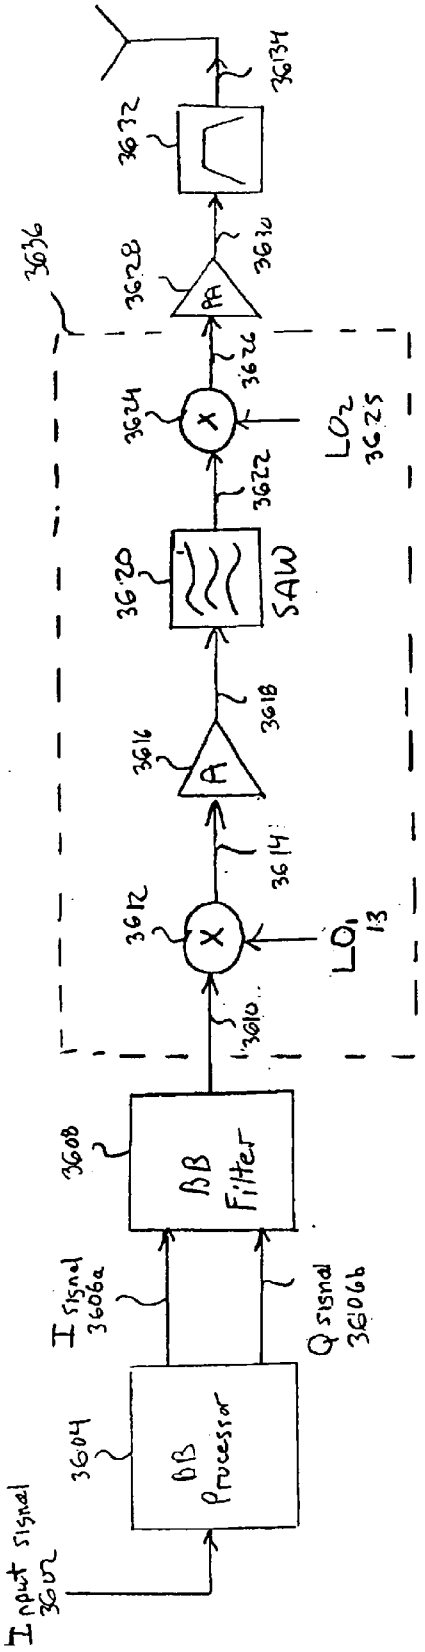


FIG. 36 : Conventional Transmitter

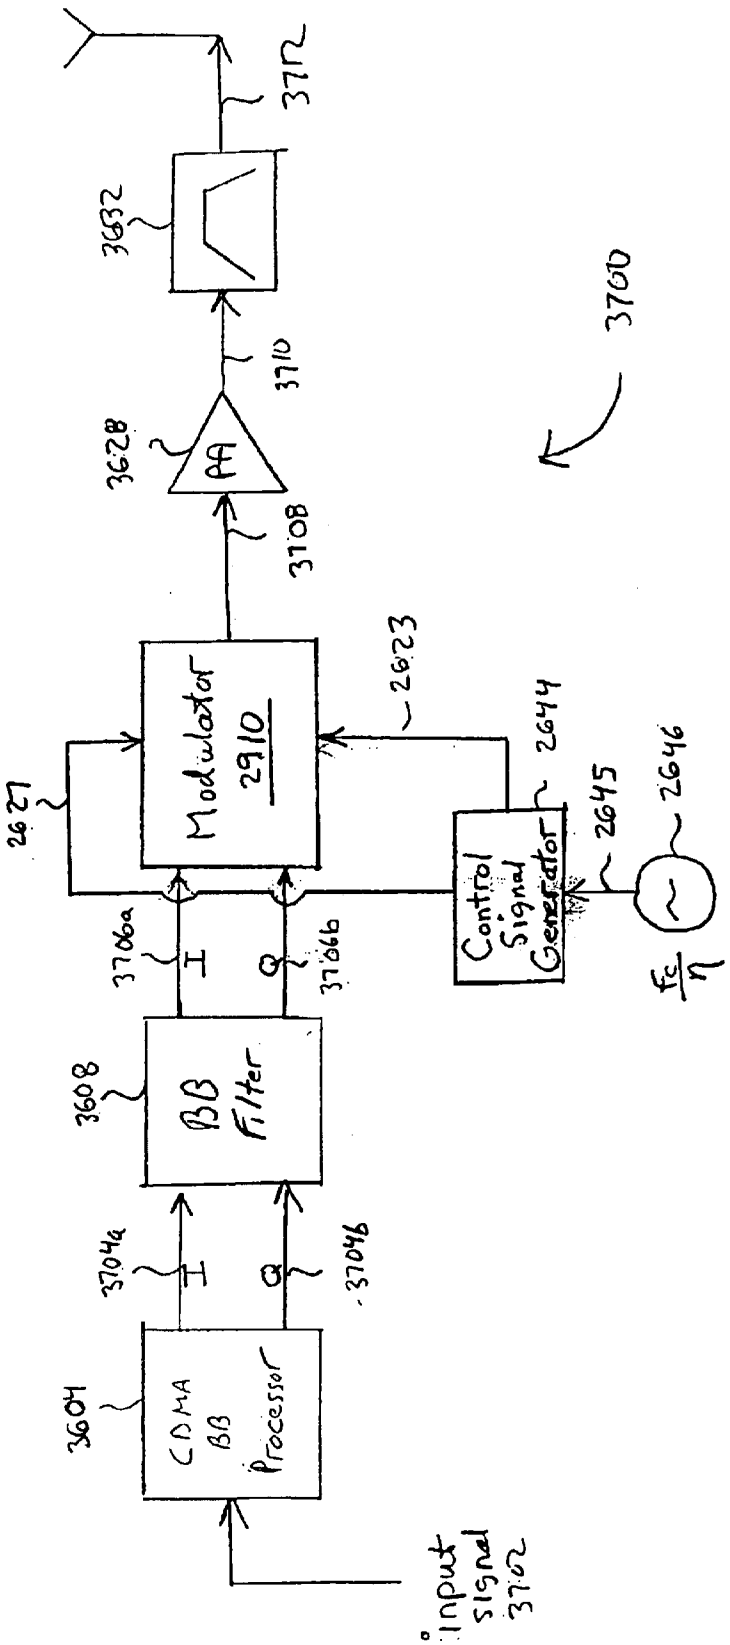


FIG. 37A: CDMA Transmitter

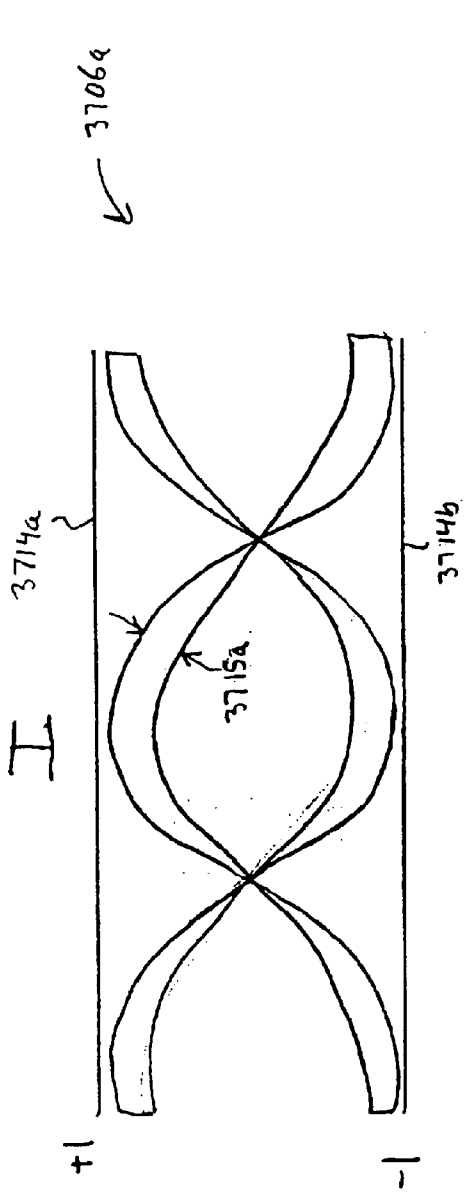


FIG. 37B

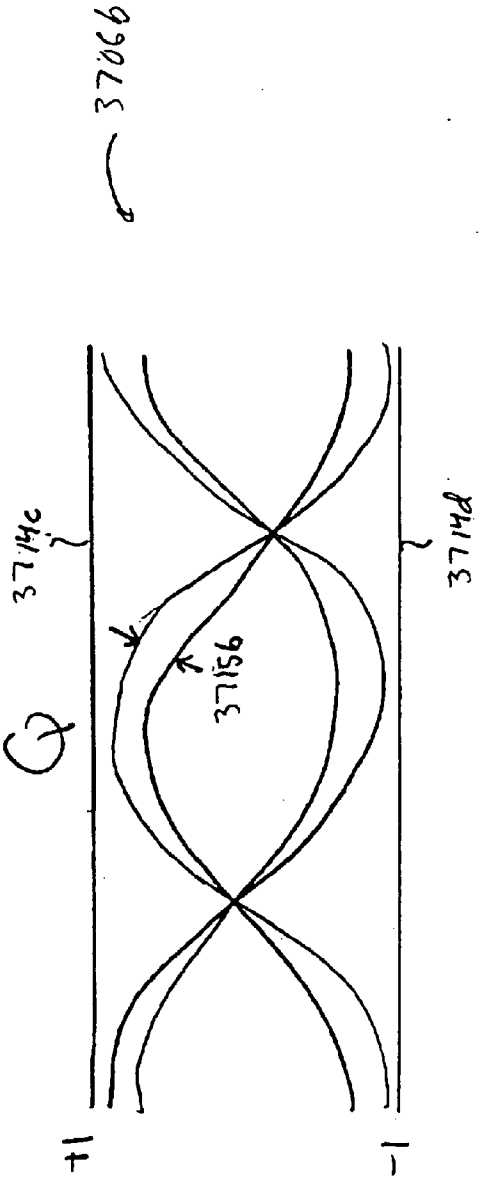


FIG. 37C

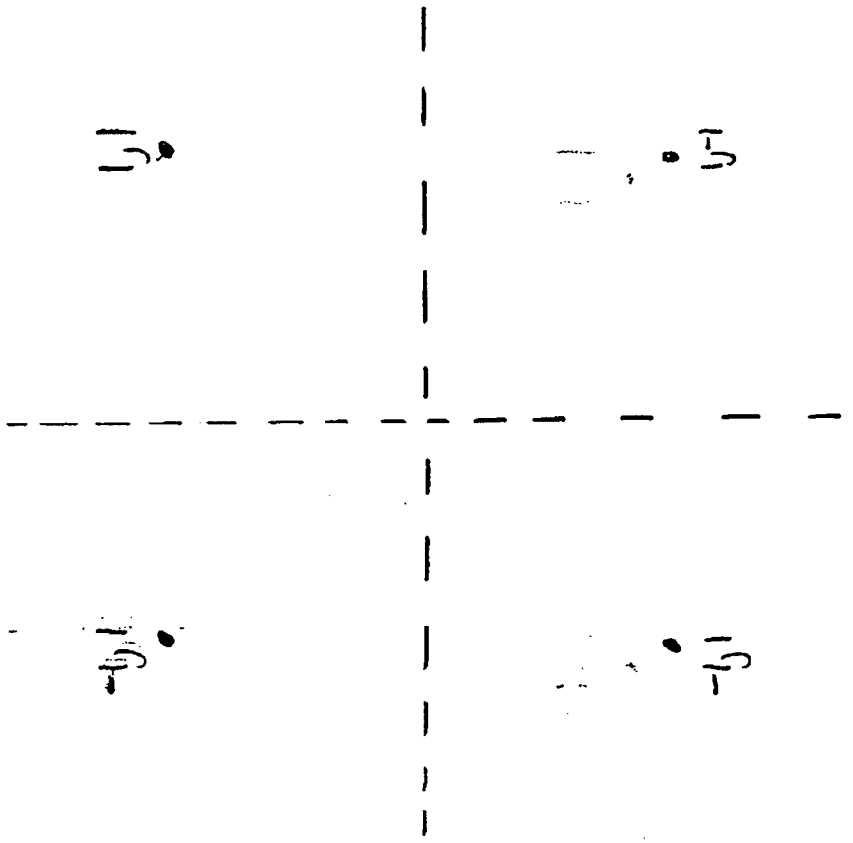


FIG. 370

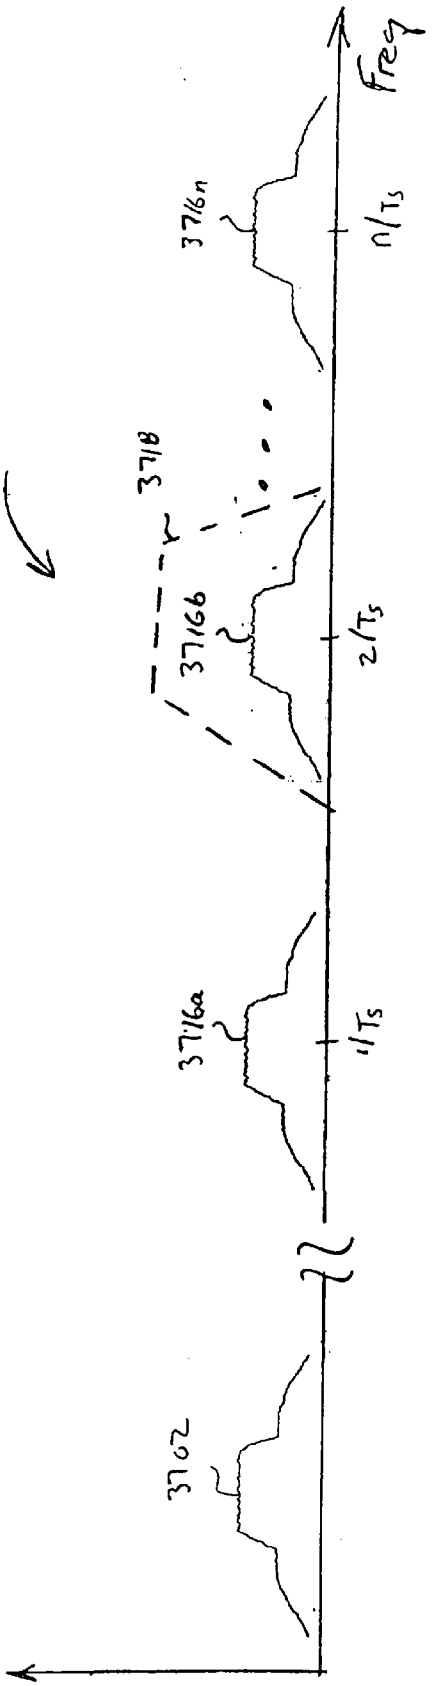


FIG. 37E

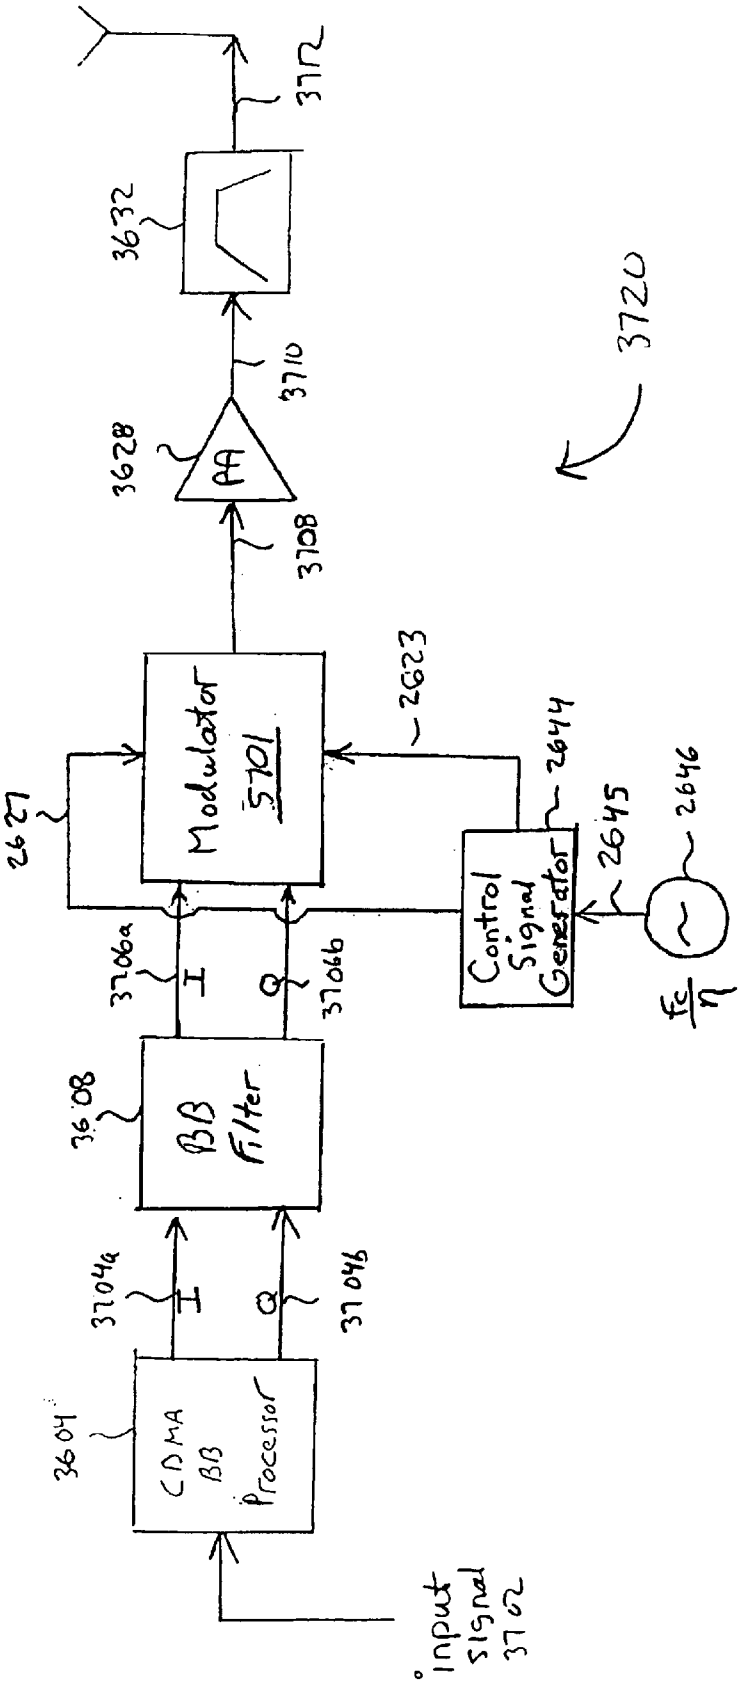


FIG: 37F CDMA Transmitter

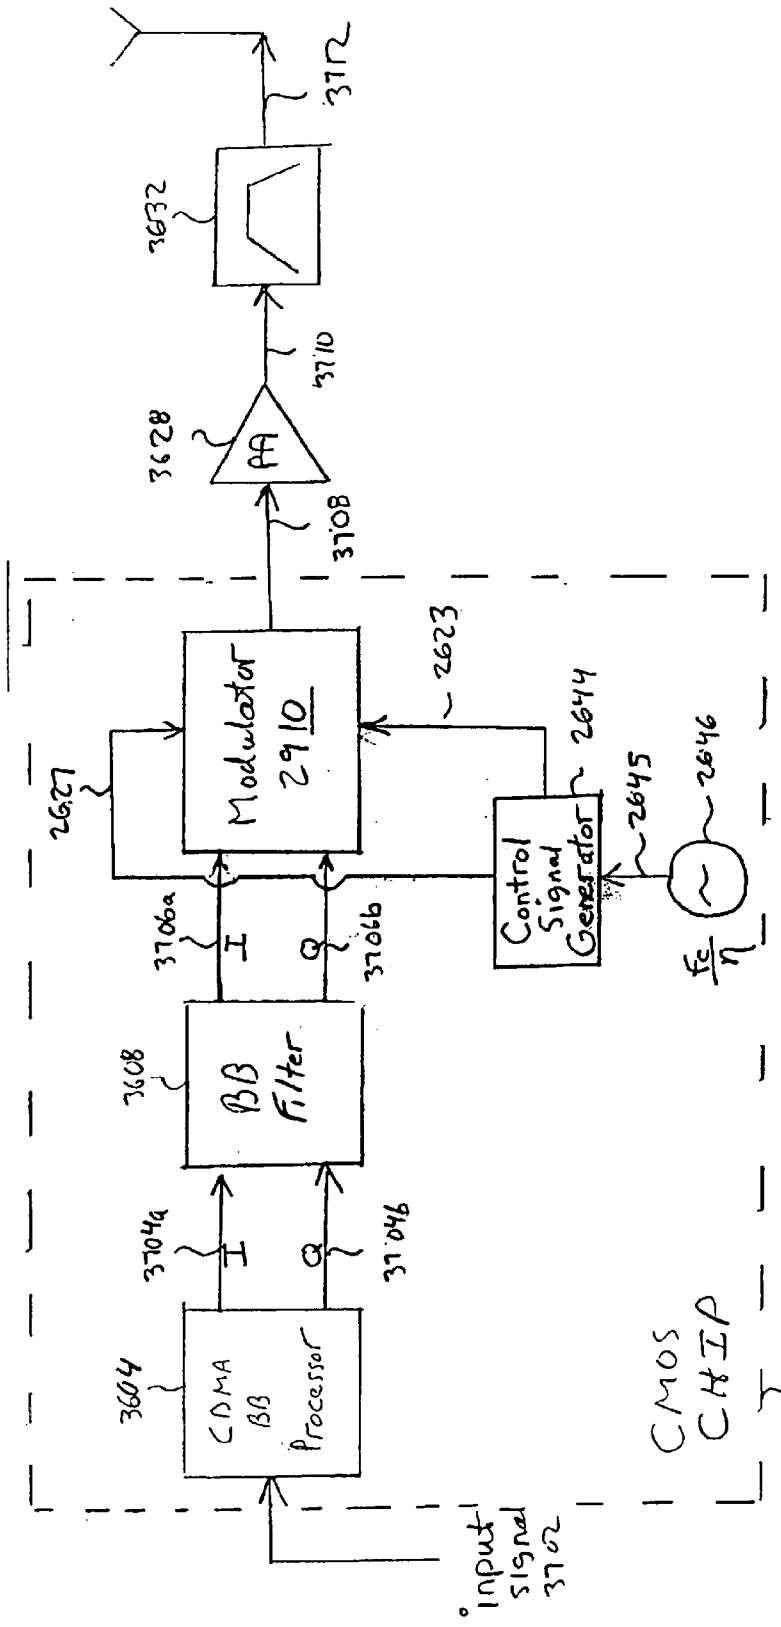


FIG 38 CDMA CMOS CHIP

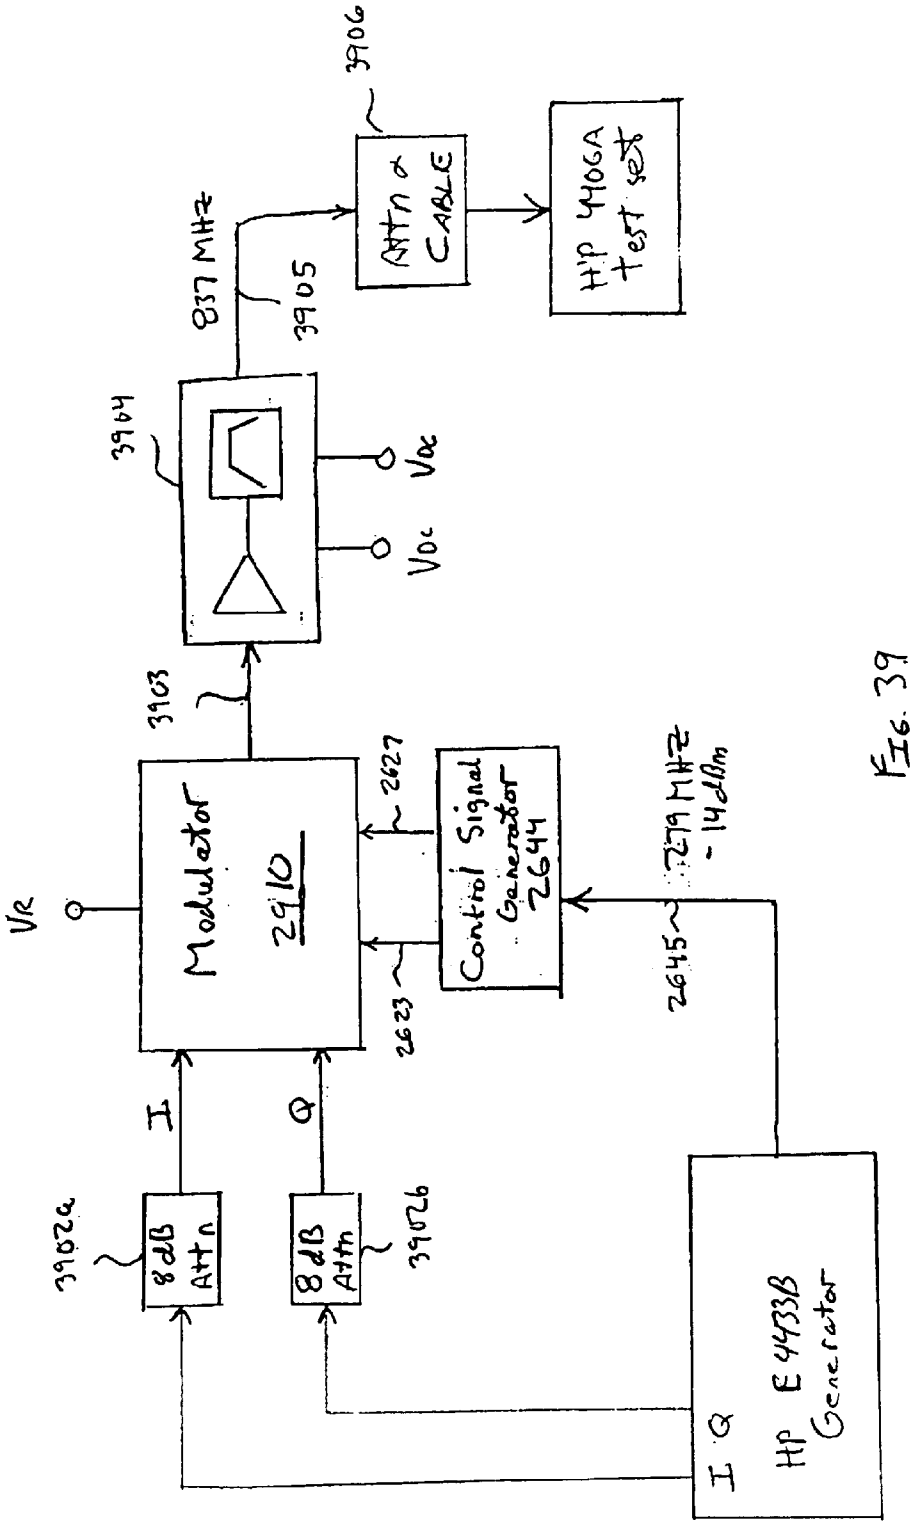

3900
3906
837 MHz
3905
Attn & CABLE
HP 4406A test set
3904
Vac
Vdc
3903
2627
Modulator 2910
Control Signal Generator 2644
2623
2645
279 MHz -14 dBm
Vr
I
Q
8dB Attn
8dB Attn
3902a
3902b
I Q
HP E4433B Generator

FIG. 39

Base Station

4002

RHO	0.9970
EVM	5.51%
PHASE ERROR	1.80°
MAGNITUDE ERROR	4.53%
CARRIER INSERTION	-37.91 dB
PA POWER OUT	28.06 dBm


FIG. 40

FREQUENCY (MHz) (Mobile Station)

4102

	LOW	*MIDDLE*	*HIGH*
RHO	0.9892	0.9969	0.9892
EVM	10.39%	5.54%	10.39%
PHASE ERROR	4.47°	2.24°	4.08°
MAGNITUDE ERROR	6.84%	4.21%	8.27%
CARRIER INSERTION	-40.15 dB	-44.58 dB	-35.27 dB
PA POWER OUT	27.36 dBm	28.11 dBm	27.55 dBm

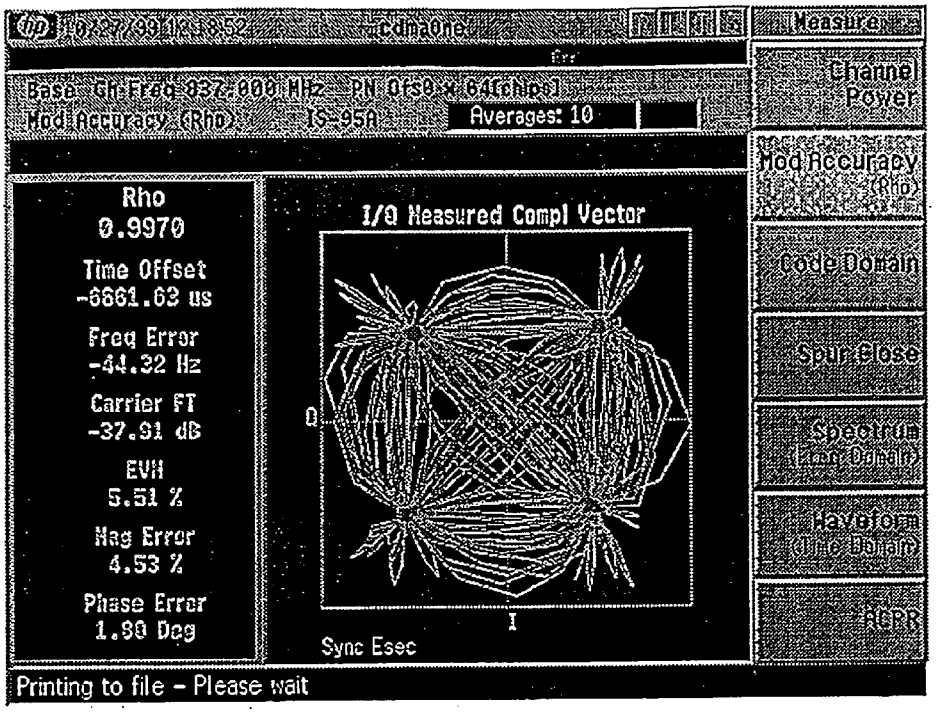
FIG. 41



Base Station Constellation for Pilot Channel Test


FIG. 42

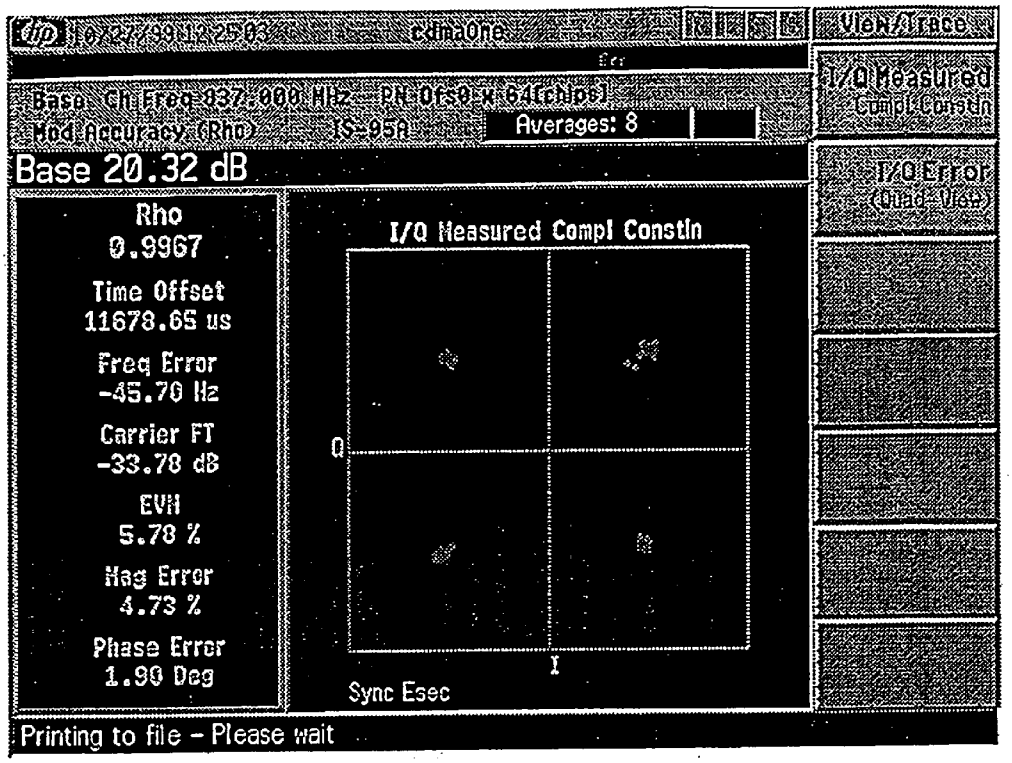4302



Base Station Sampled Constellation

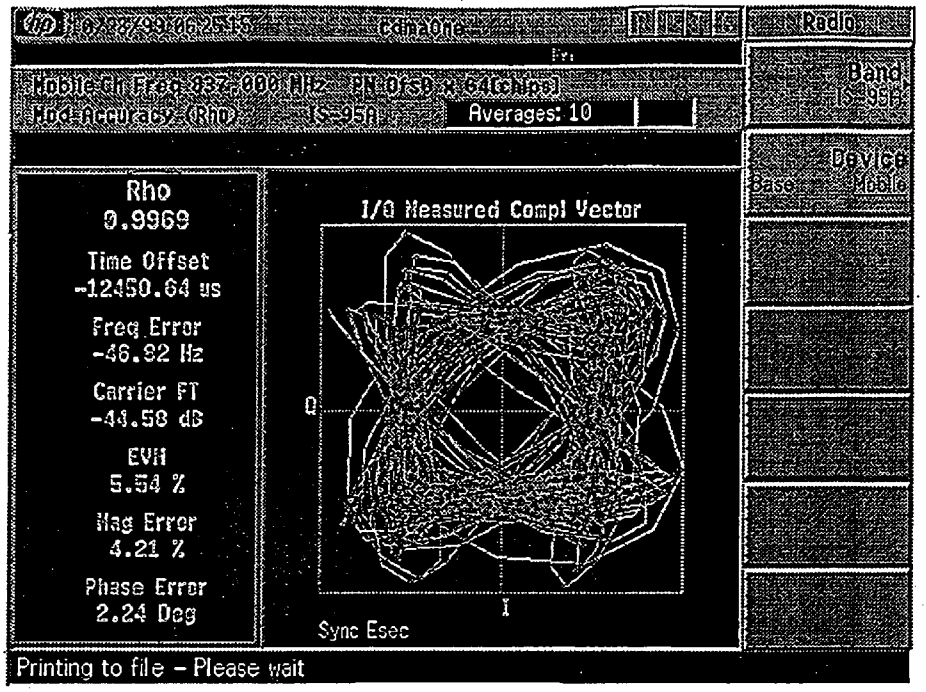
FIG. 43



Mobile Station Constellation for Access Channel Test


FIG. 44

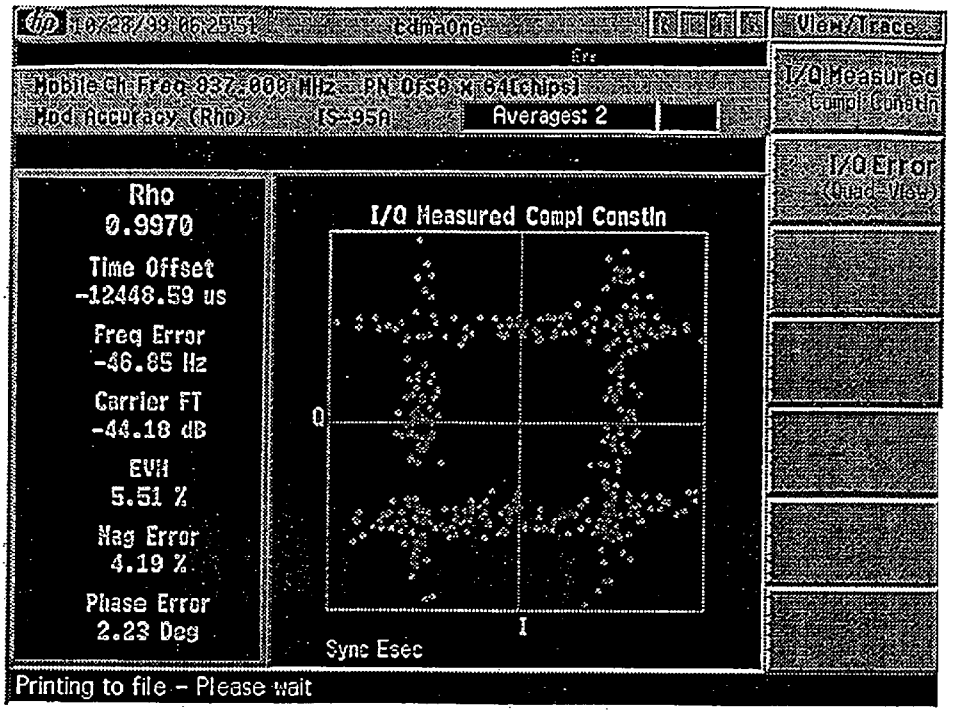4502




Mobile Station Sampled Constellation

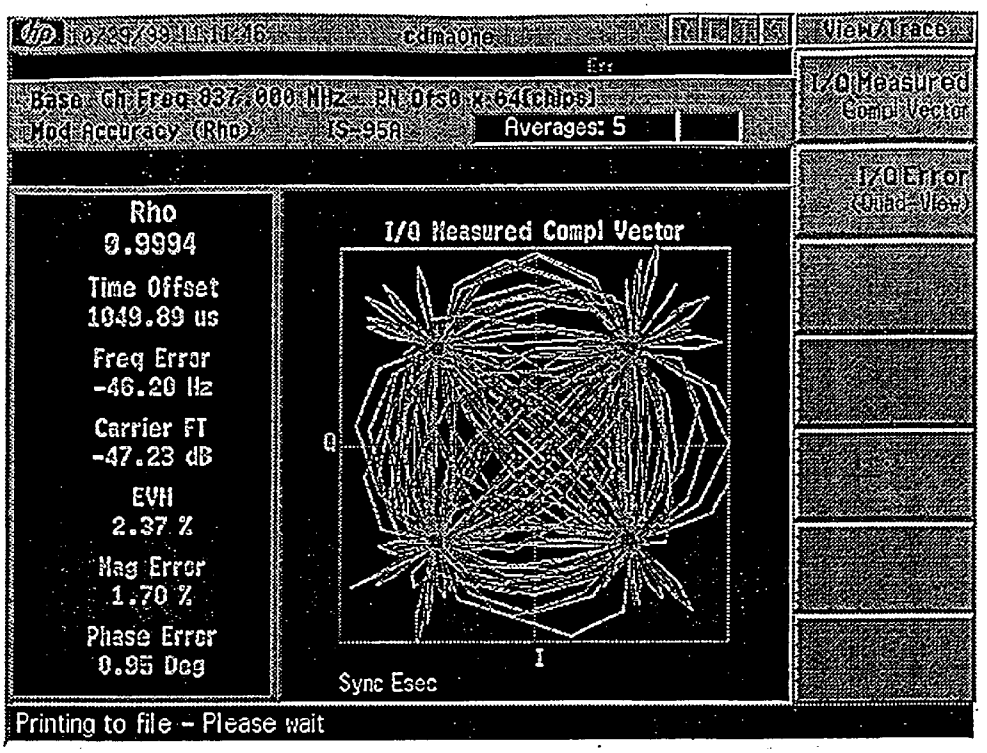FIG. 45



Base Station Constellation using only H/P Test Equipment

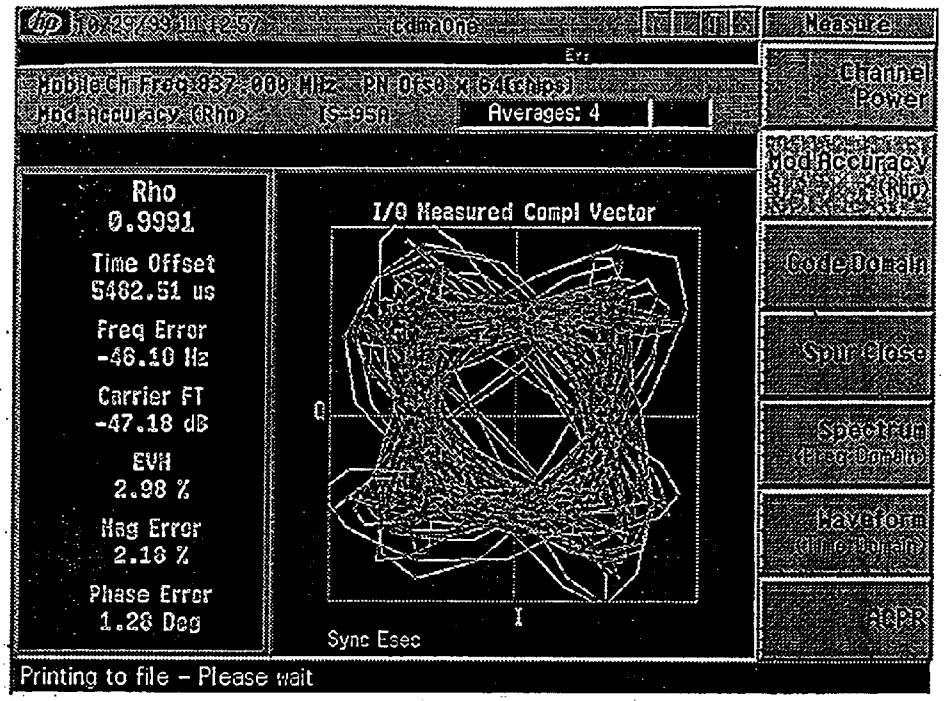FIG. 46



Mobile Constellation using only H/P Test Equipment

FIG. 47


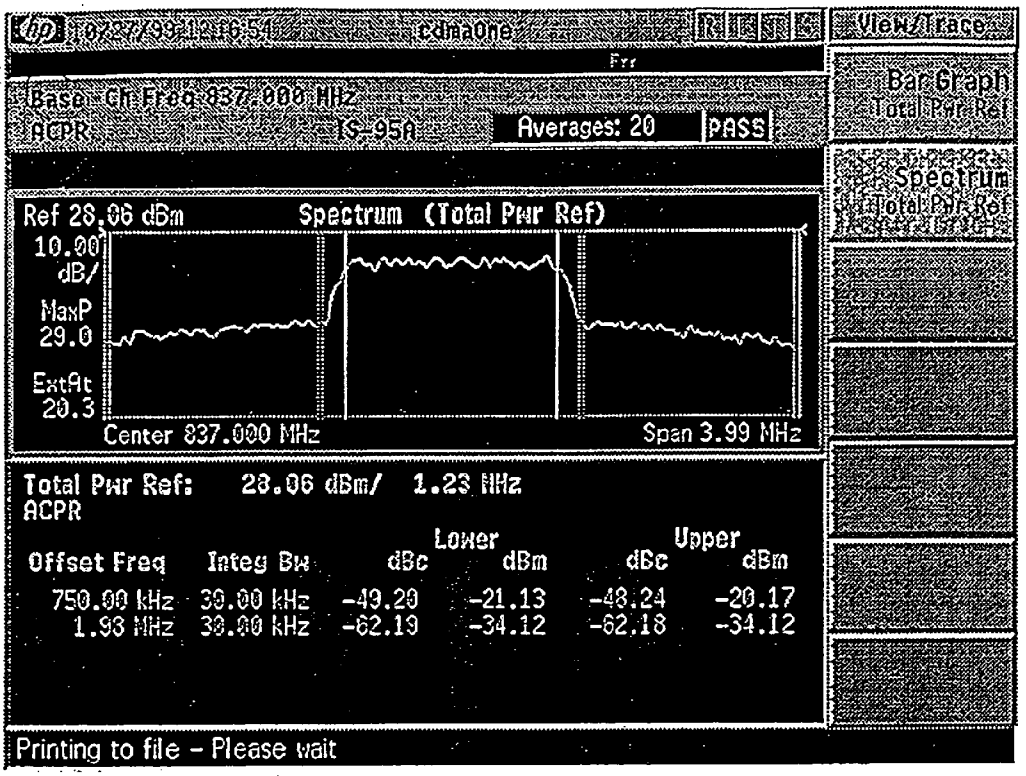

4802
View/Trace
Bar Graph
Total Pwr Ref
Spectrum
Total Pwr Ref
cdmaOne
Base Ch Freq 837.000 MHz
ACPR
IS-95A
Averages: 20
PASS
Ref 28.06 dBm
Spectrum (Total Pwr Ref)
10.00
dB/
MaxP
29.0
ExtAt
20.3
Center 837.000 MHz
Span 3.99 MHz
Total Pwr Ref: 28.06 dBm/ 1.23 MHz
ACPR
Lower
Upper
Offset Freq
Integ Bw
dBc
dBm
dBc
dBm
750.00 kHz 30.00 kHz -49.20 -21.13 -48.24 -20.17
1.98 MHz 30.00 kHz -62.19 -34.12 -62.18 -34.12
Printing to file - Please wait

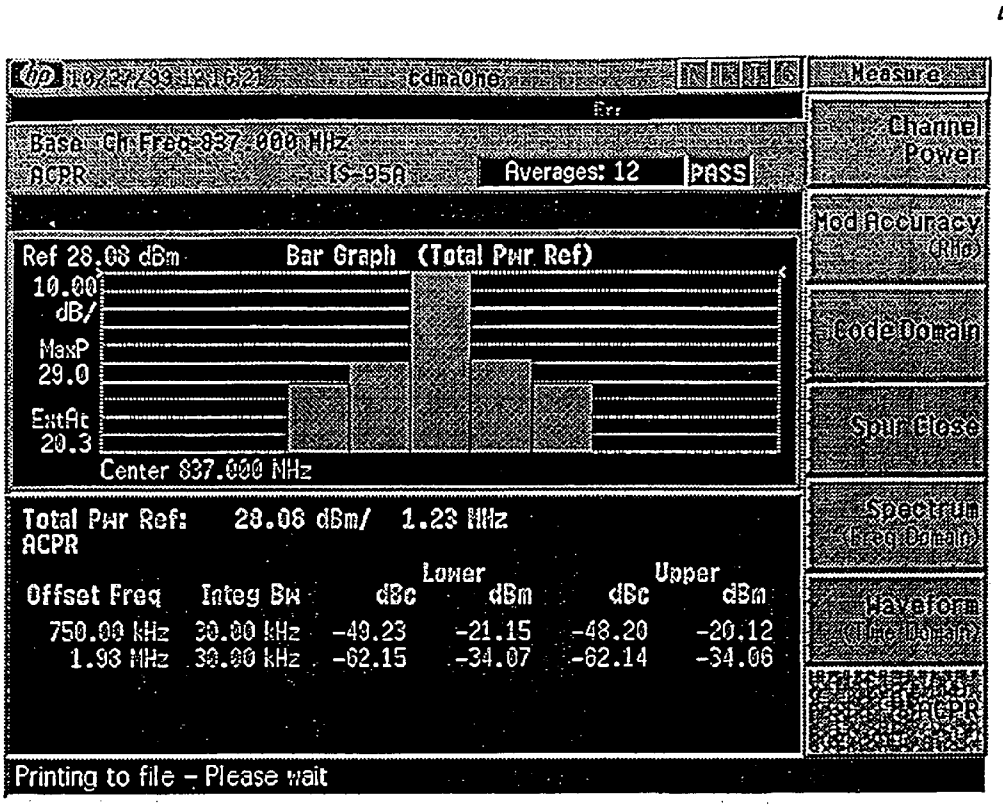FIG. 48



Base Station Spectral Response with Mask

FIG. 49

5002



10/28/99 06:32:51
cdmaOne
View/Trace
Err
Mobile Ch Freq 837.000 MHz
ACPR
IS-95A
Averages: 20
PASS
Bar Graph
Total Pwr Ref
Spectrum
Total Pwr Ref
Ref 28.11 dBm
Spectrum (Total Pwr Ref)
10.00 dB/
MaxP 41.0
ExtAt 20.3
Center 837.000 MHz
Span 3.99 MHz
Total Pwr Ref: 28.11 dBm/ 1.23 MHz
ACPR
Lower
Upper
Offset Freq Integ Bw dBc dBm dBc dBm
885.00 kHz 30.00 kHz -52.82 -24.71 -52.62 -24.51
1.98 MHz 30.00 kHz -60.96 -32.84 -61.64 -33.53
Printing to file - Please wait

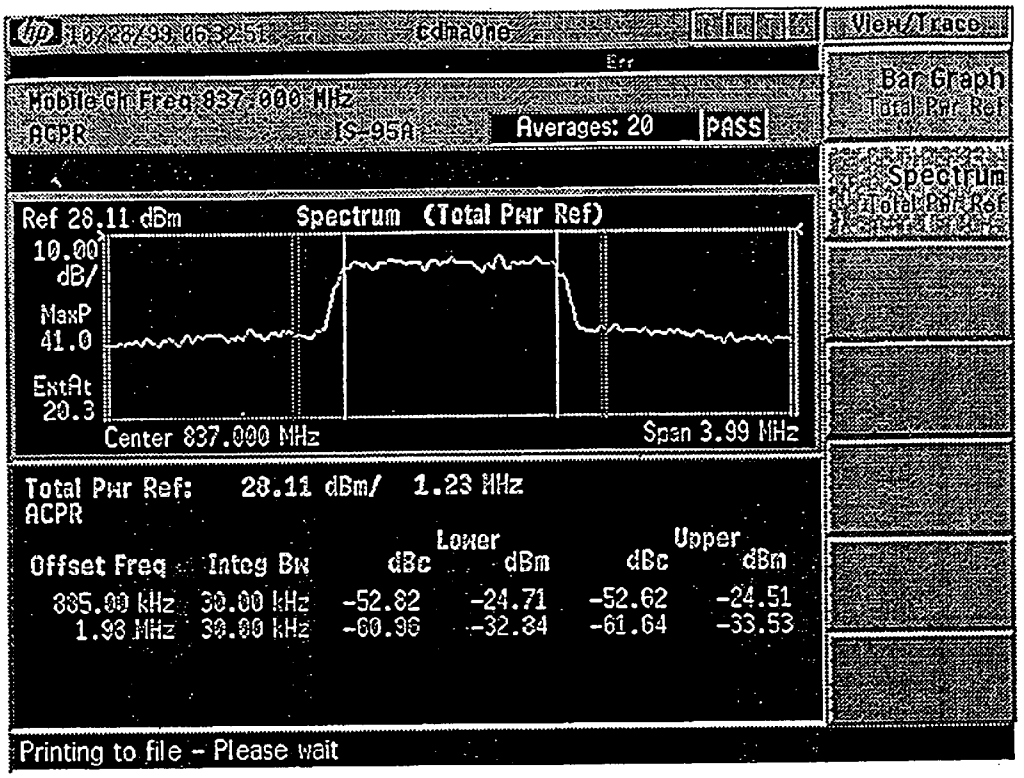FIG 50


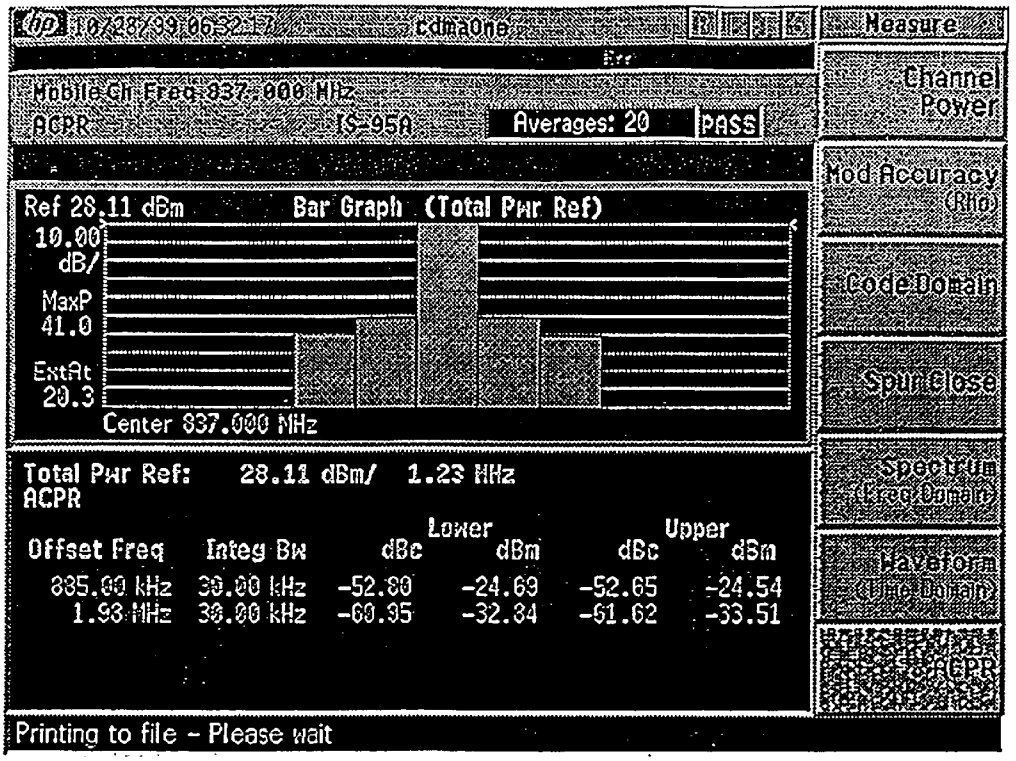


Figure 3.2-2 Mobile Station Spectral Response with Mask

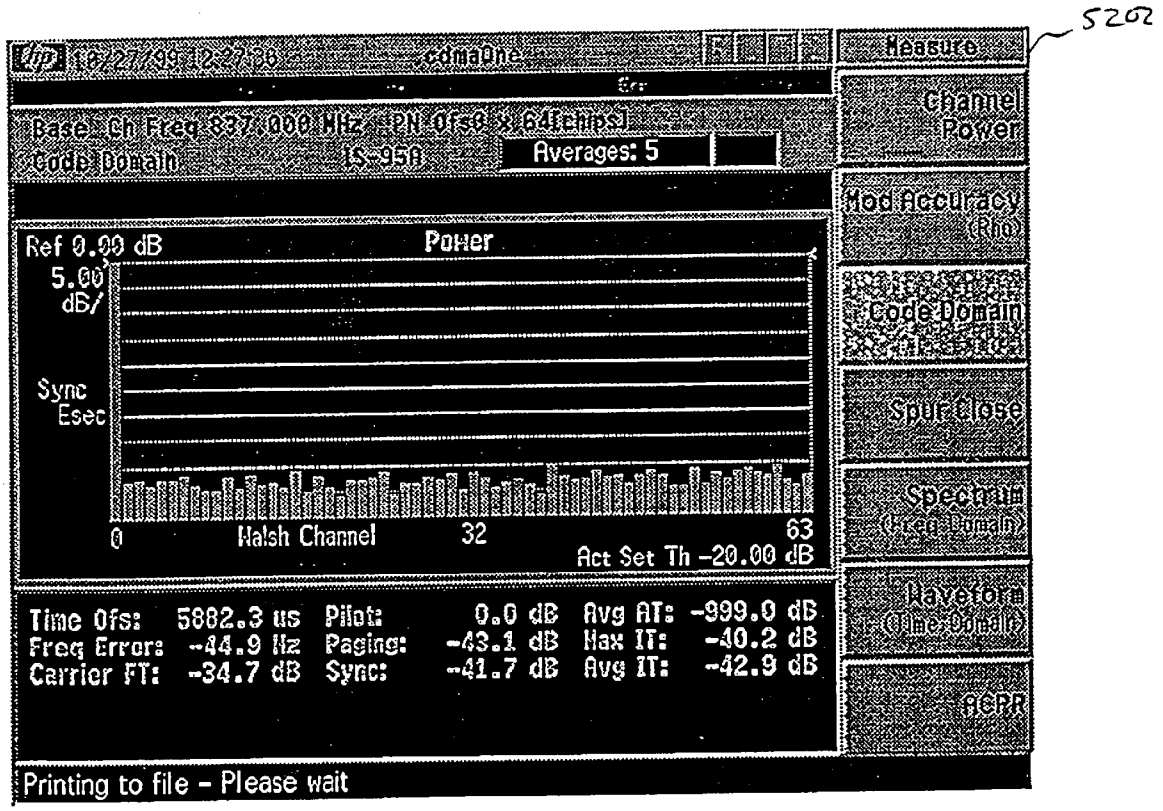FIG. 51



CDMA Crosstalk

FIG. 52A

Sequence for IQ Input Level Variance

FIG 52B

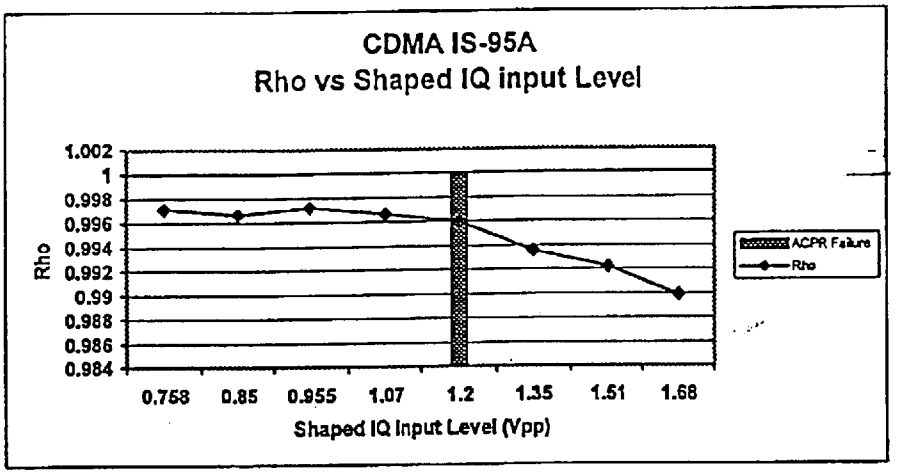


FIG 52C

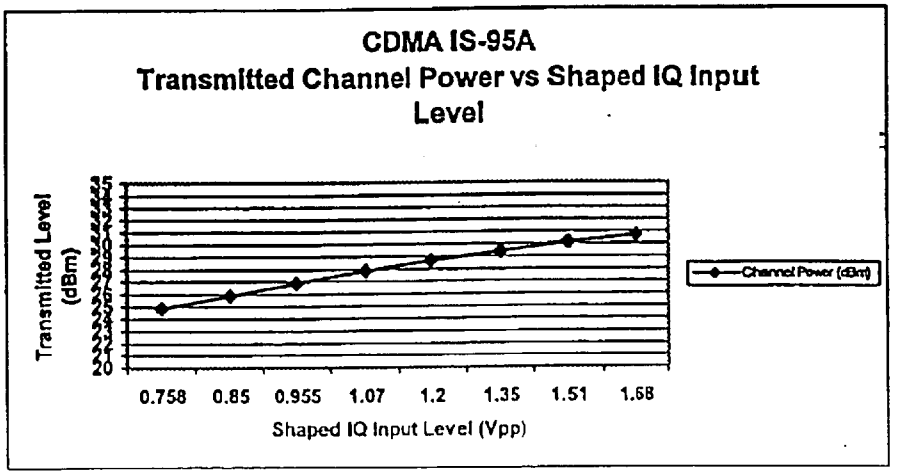


FIG 52D

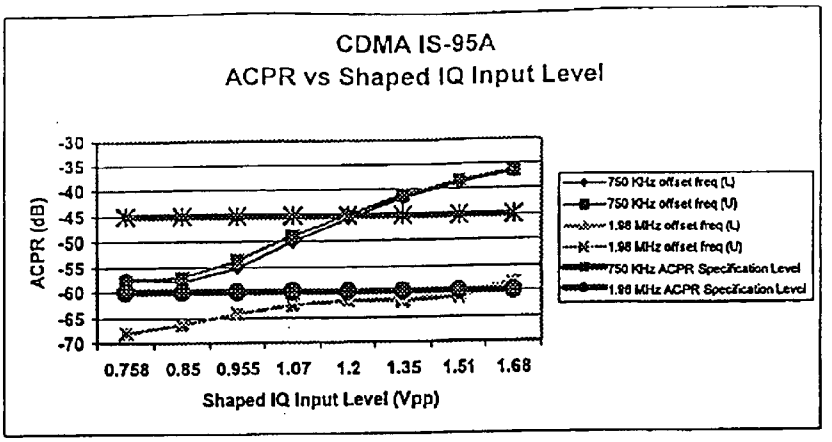


FIG. 52E


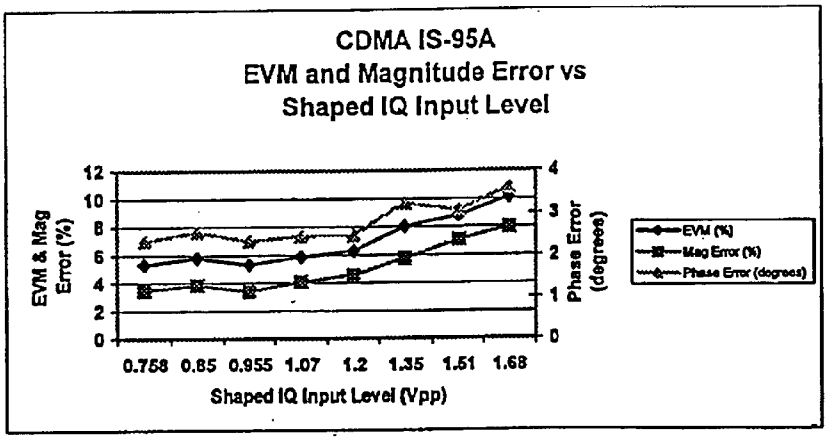


FIG. 52F

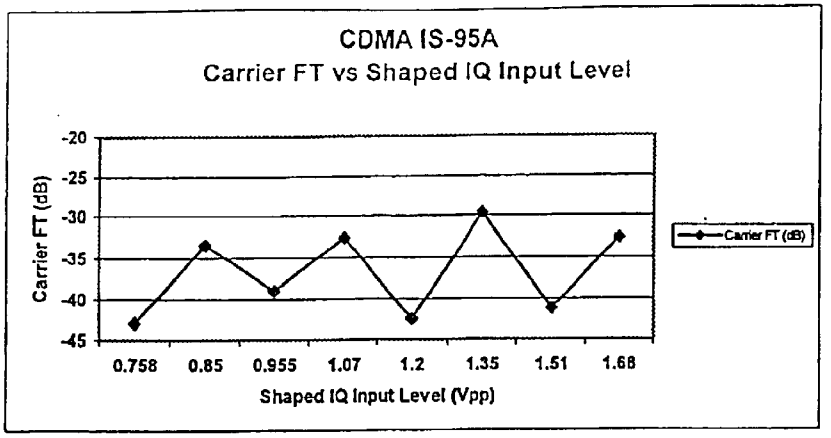

Sequence for LO Variance

FIG. 52G

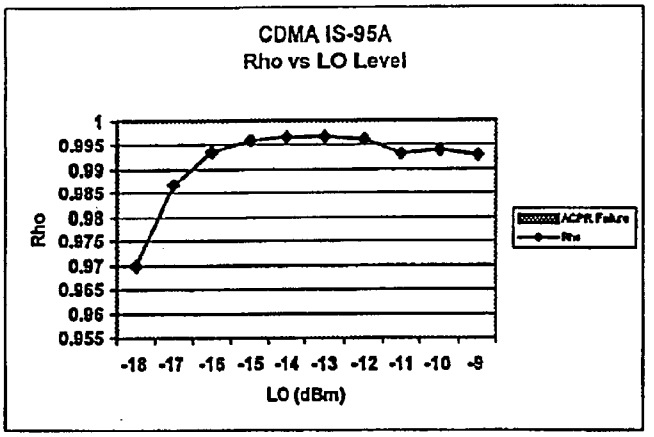


FIG. 52H

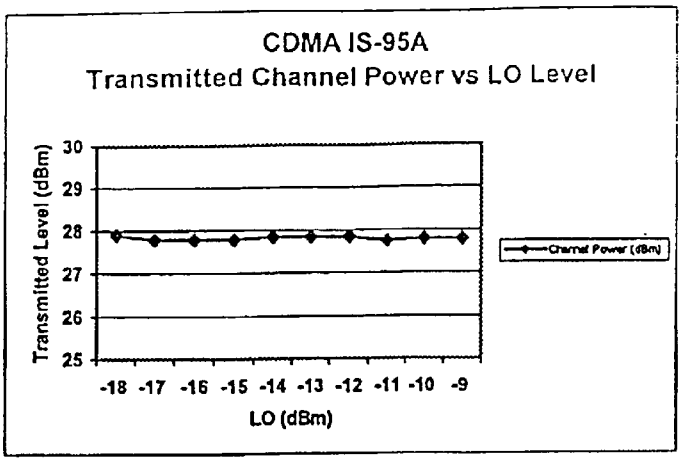


FIG 52I

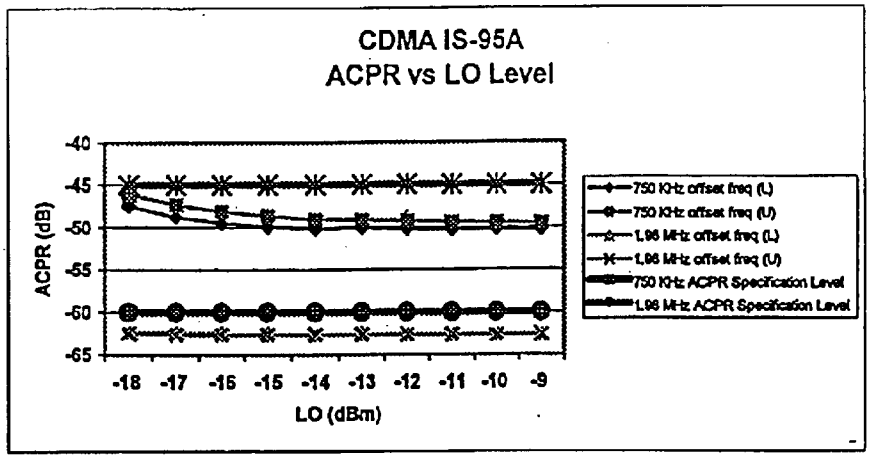


FIG. 52J

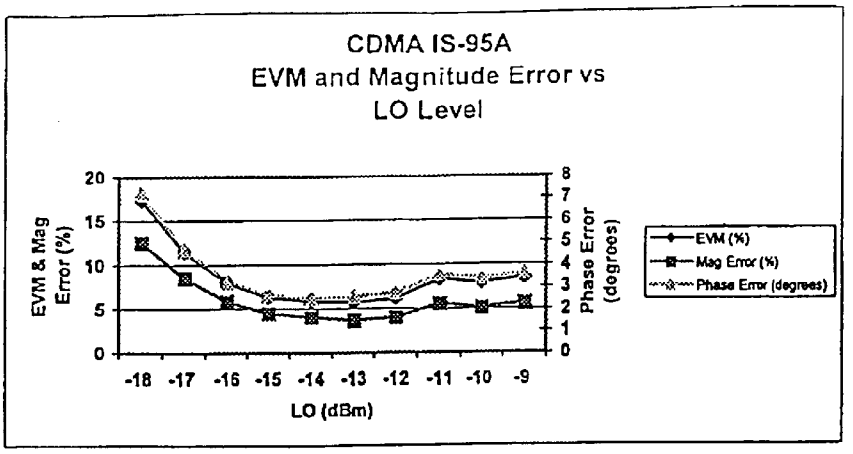


FIG. 52K

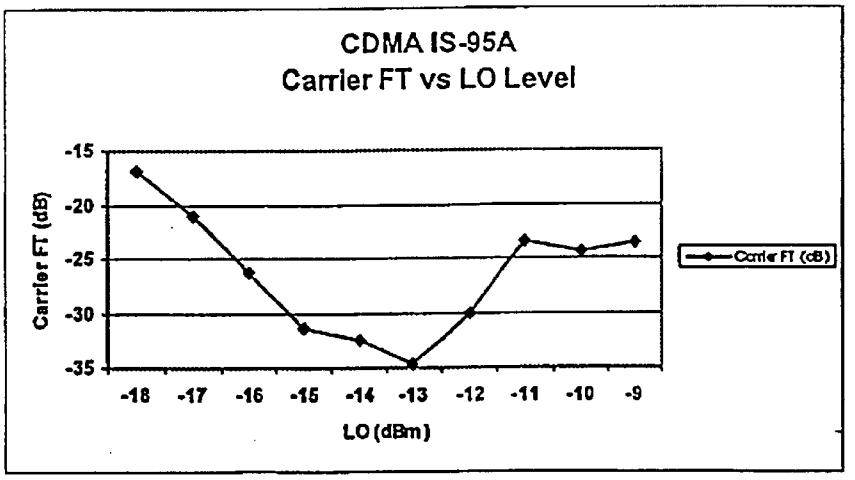


FIG. 52L

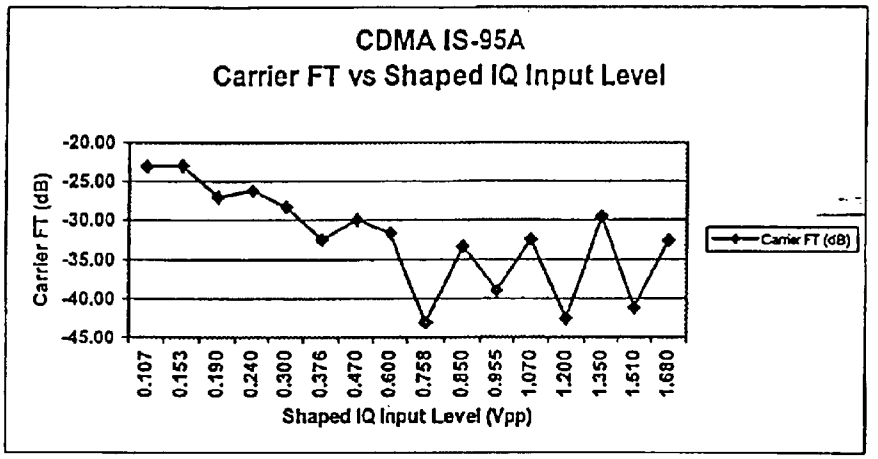


FIG. 52M

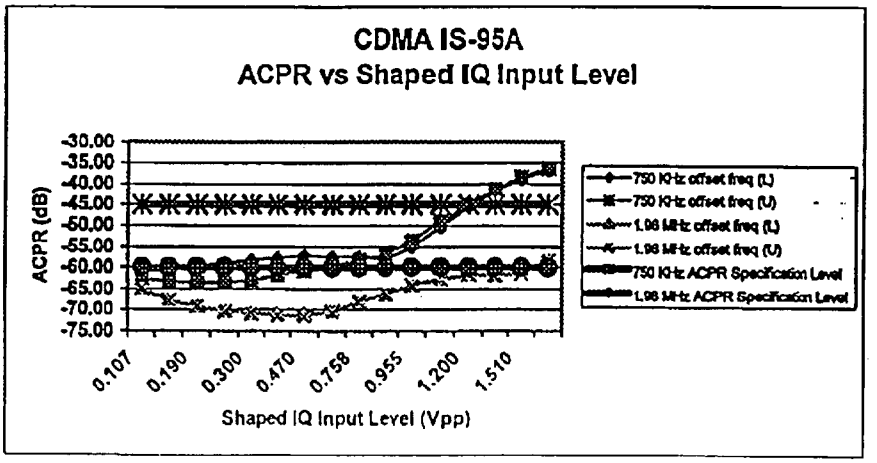


FIG. 52N


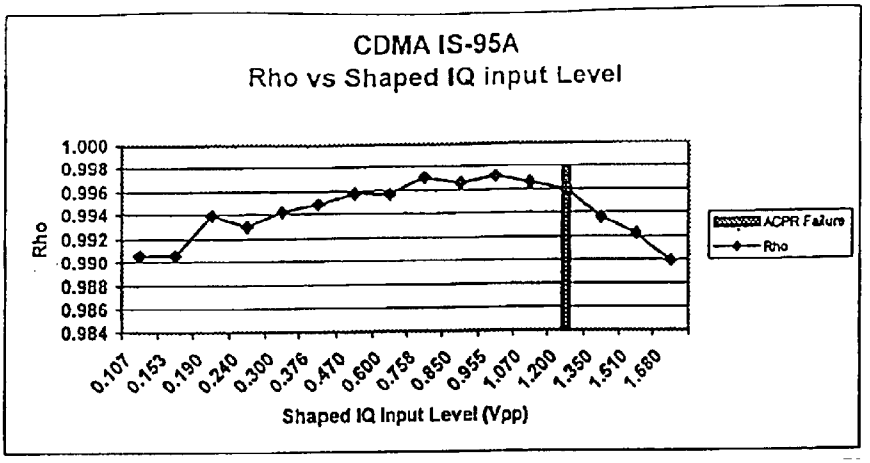


FIG 520

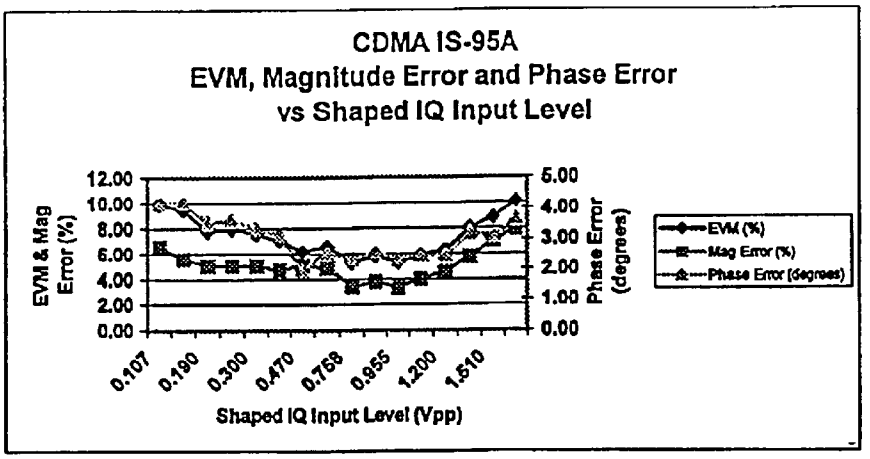

Sequence for IQ Input Level Variance

FIG. 52P

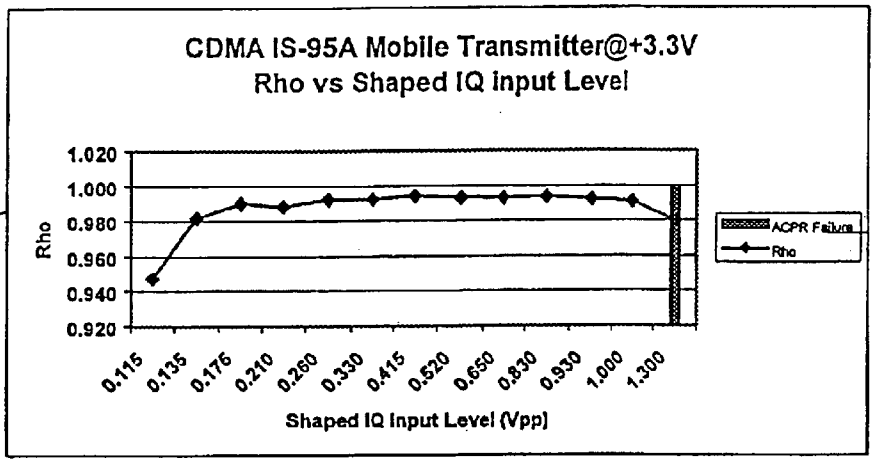


FIG. 52Q

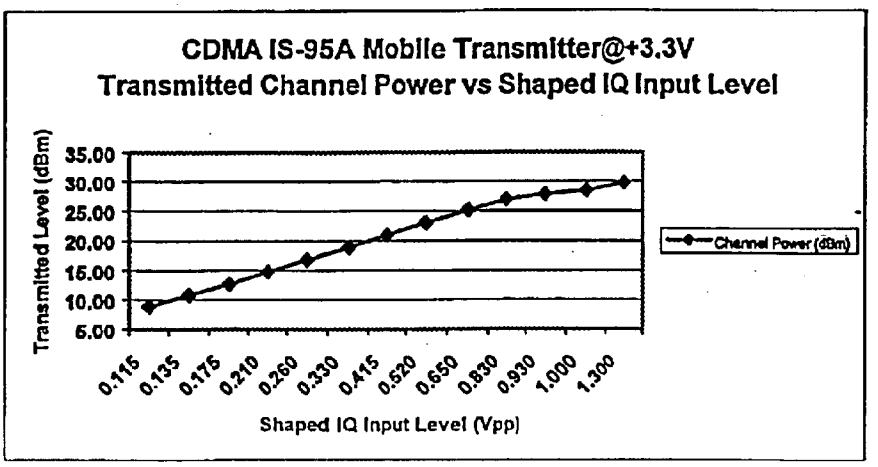


FIG. 52R

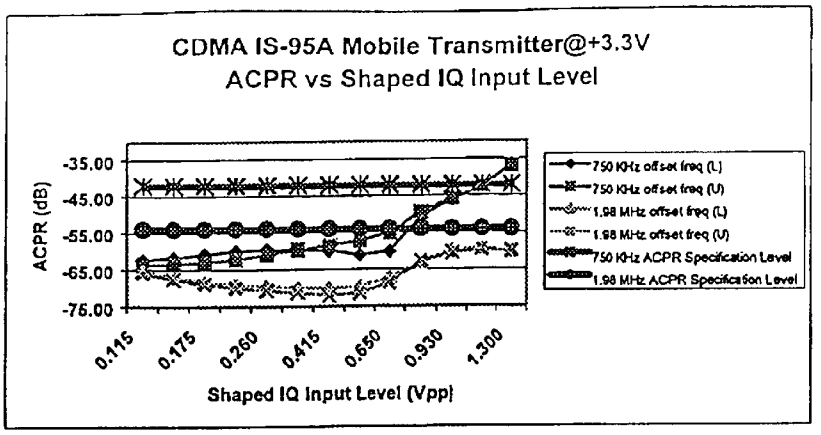


FIG. 52S

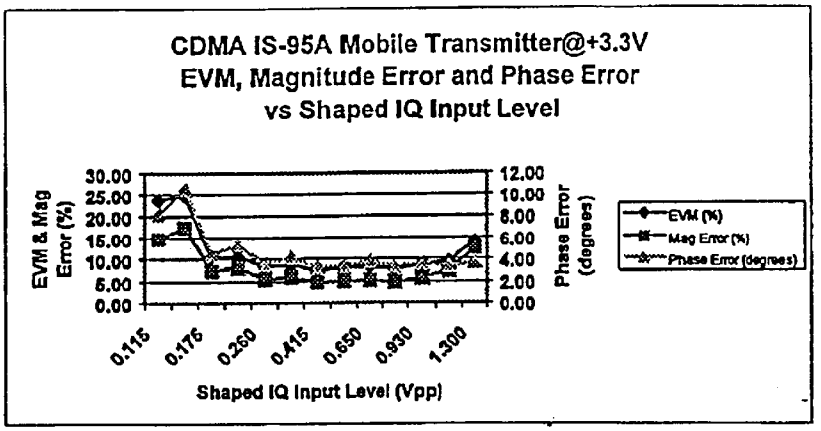


FIG. 52T

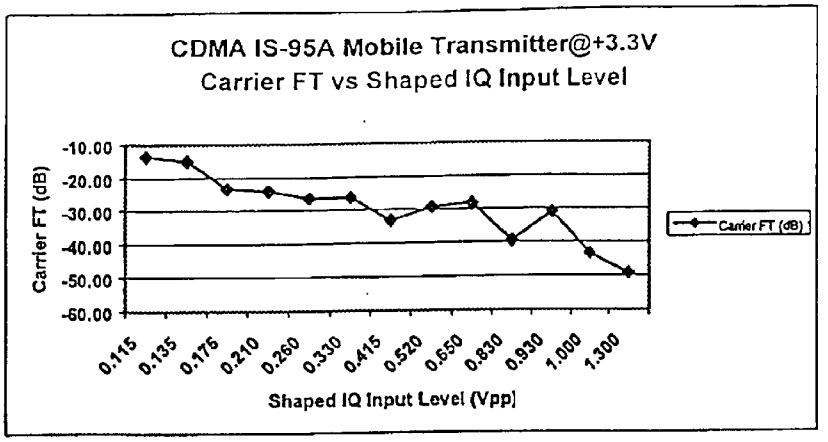


Figure 3.6-5

Sequence for LO Variance

FIG. 52U

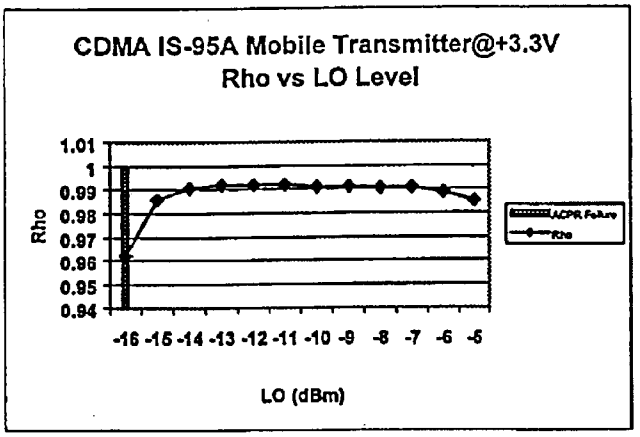


Figure 3.6-6

FIG. 52V

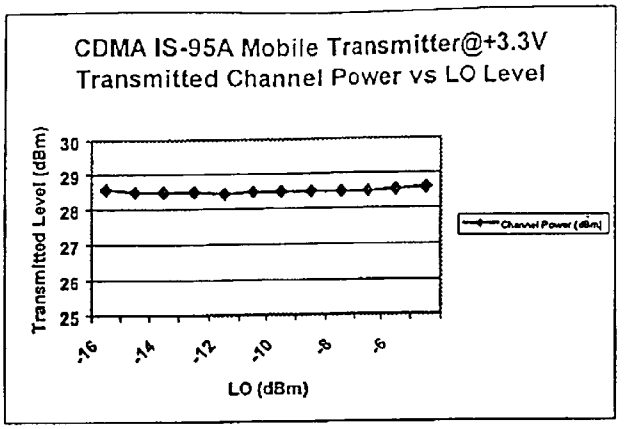


FIG. 52W

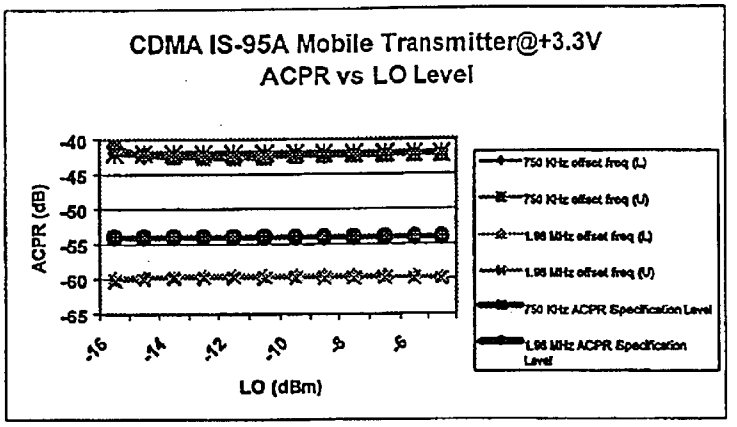


FIG. 52X


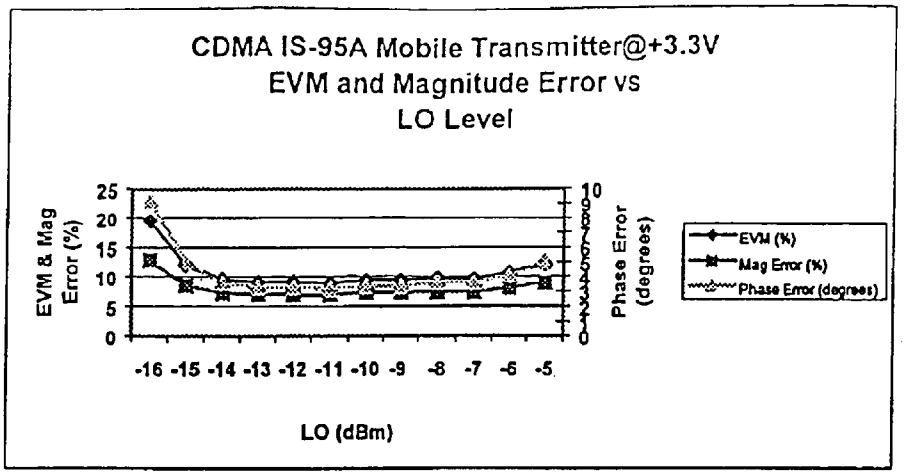


FIG. 52Y

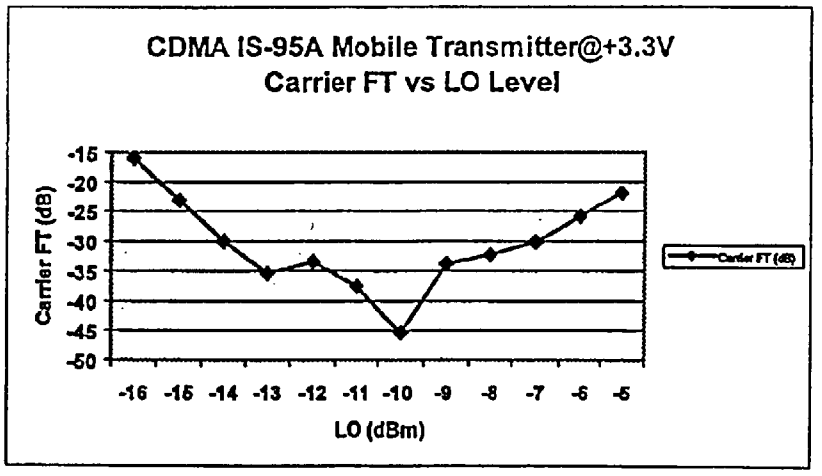

Quantity	*Description*	*Voltage*	*Total Current*	*Power*
2	Cores	3.3	4mA	13.2mW
2	Baseband Interface Circuits with/BW Limit	3.3	6mA	21.8mW
1	Clock Circuit	3.3	5mA	20.0mW
			Sub Total	54.0mW

FIG. 52

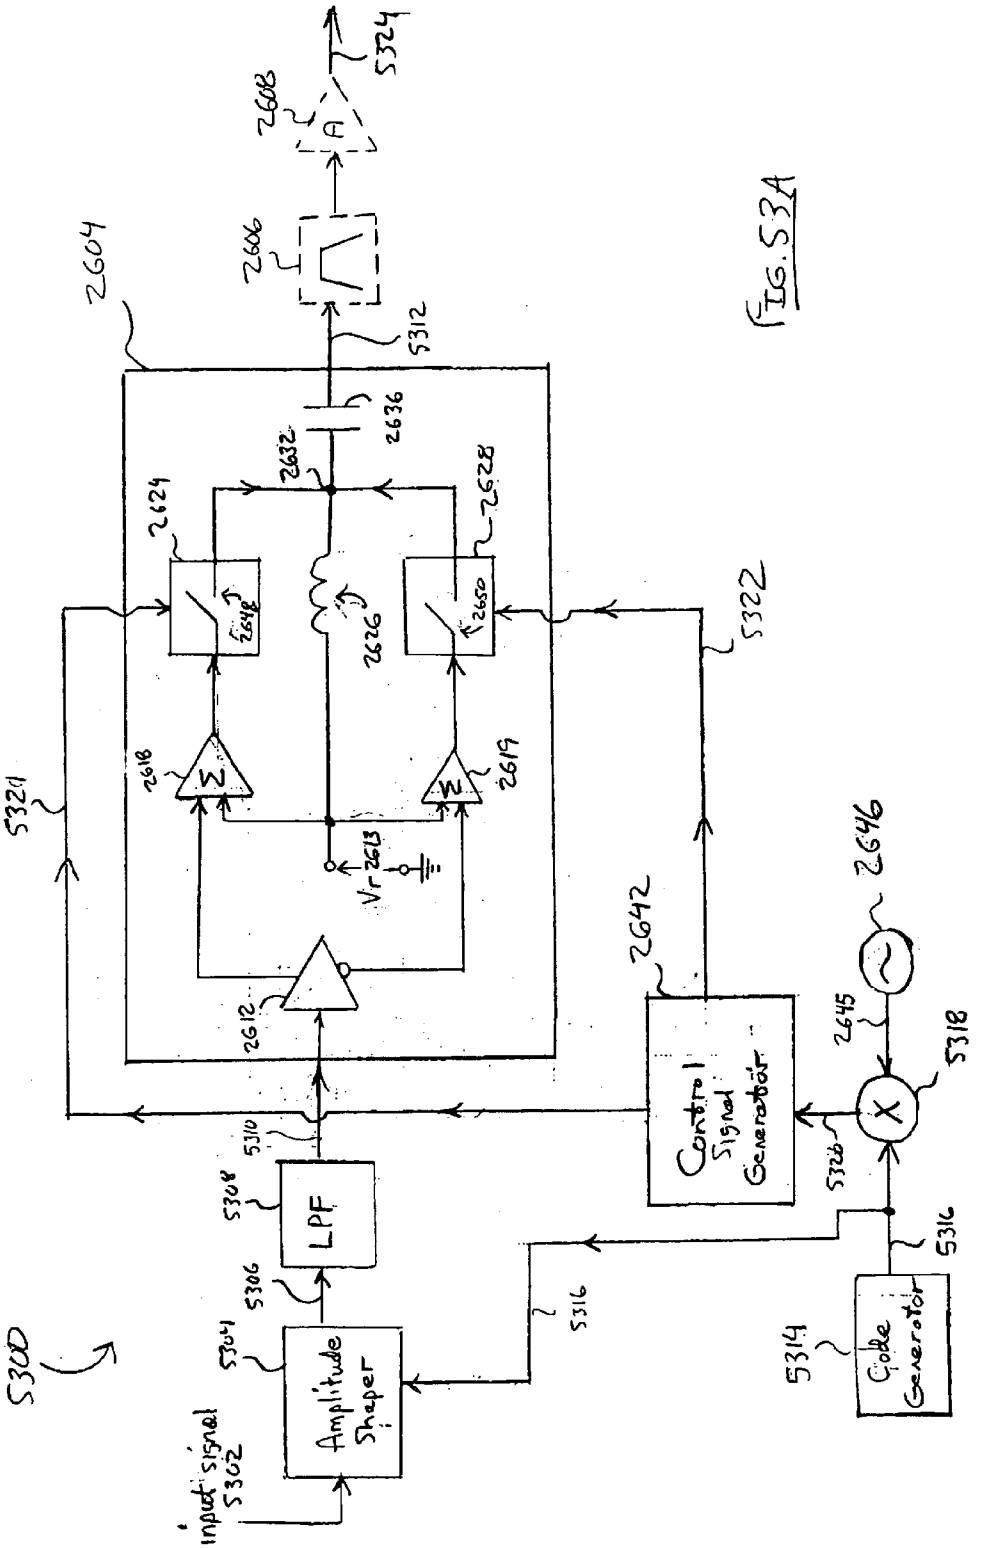

5308
Input signal
5302
Amplitude Shaper
5304
5306
LPF
5310
2604
2606
2608
5324
5312
2636
2632
2624
2628
2626
2618
2619
2612
2613
5321
5322
2642
Control Signal Generator
2646
2645
5318
5316
5314
Code Generator

FIG. 53A

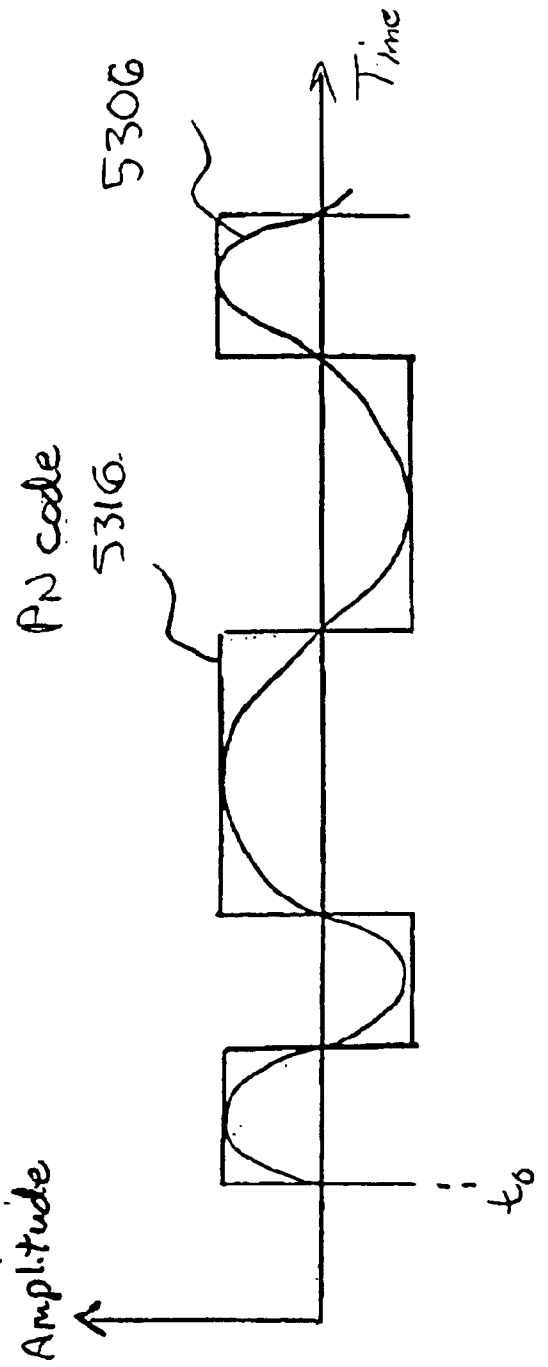


FIG. 53B

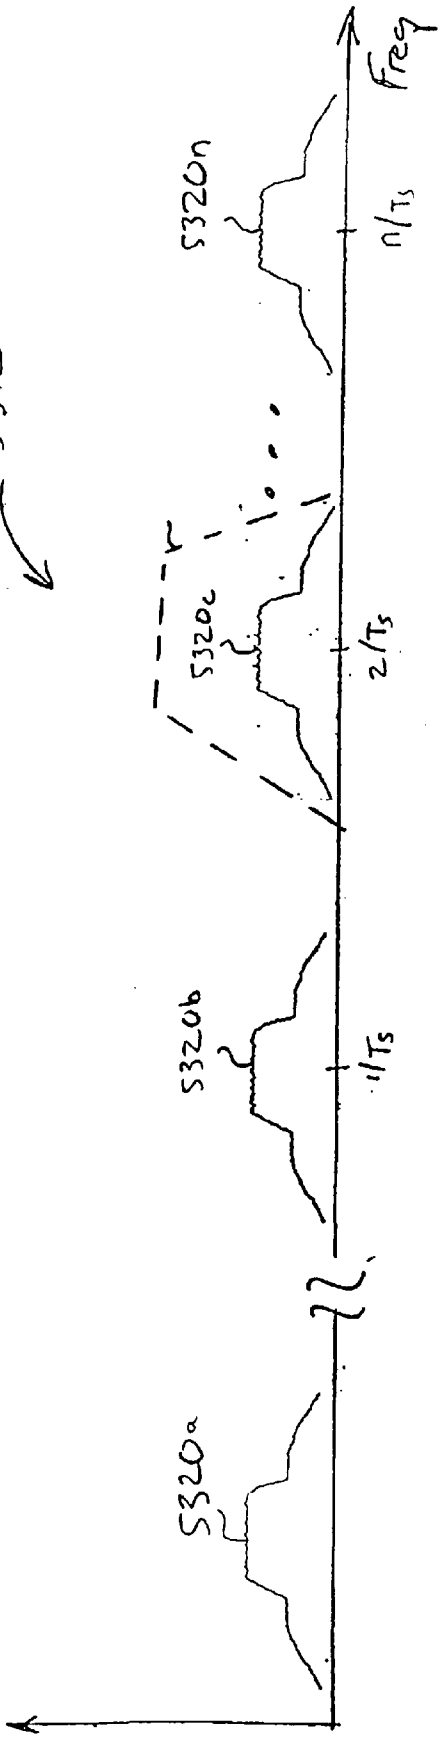


FIG. 53C

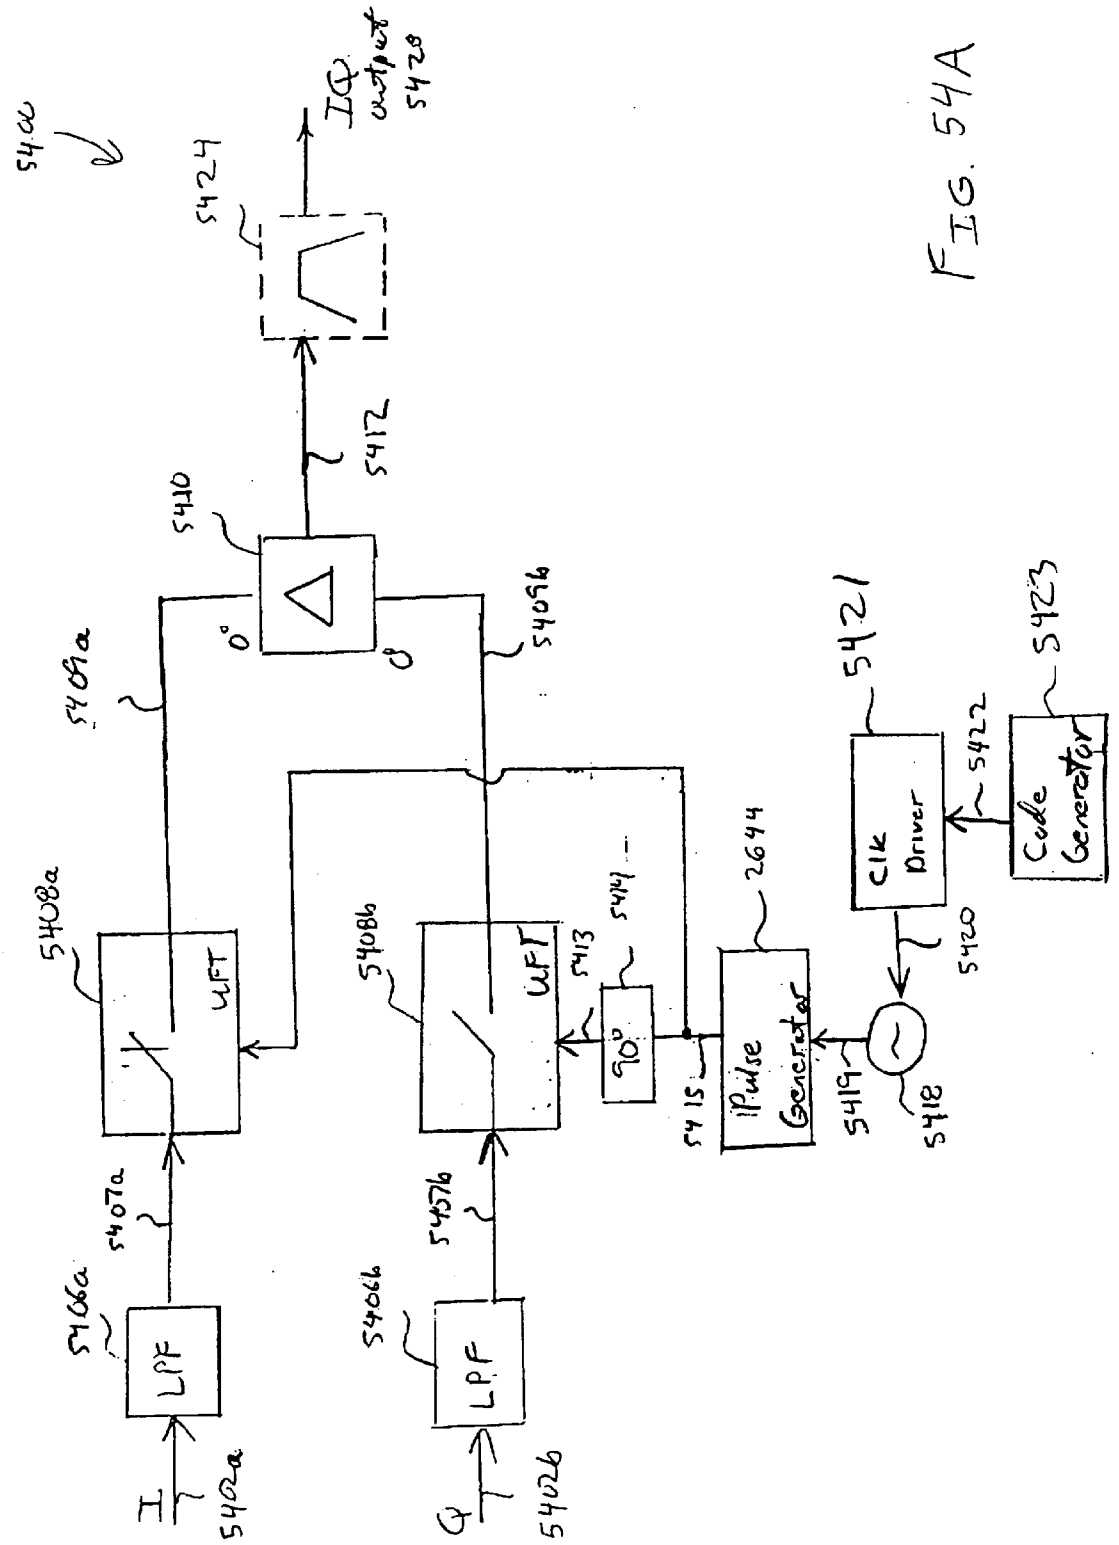

54aa
IQ output
5428
5424
5417
5410
0°
0°
5408a
5409b
5421
5423
5422
Clk Driver
Code Generator
5408a
UFT
5408b
UFT
5413
5414
90°
2644
IPulse Generator
5415
5419
5418
5420
5407a
5407b
5406a
5406b
LPF
LPF
I
Q
5402a
5402b

FIG. 54A

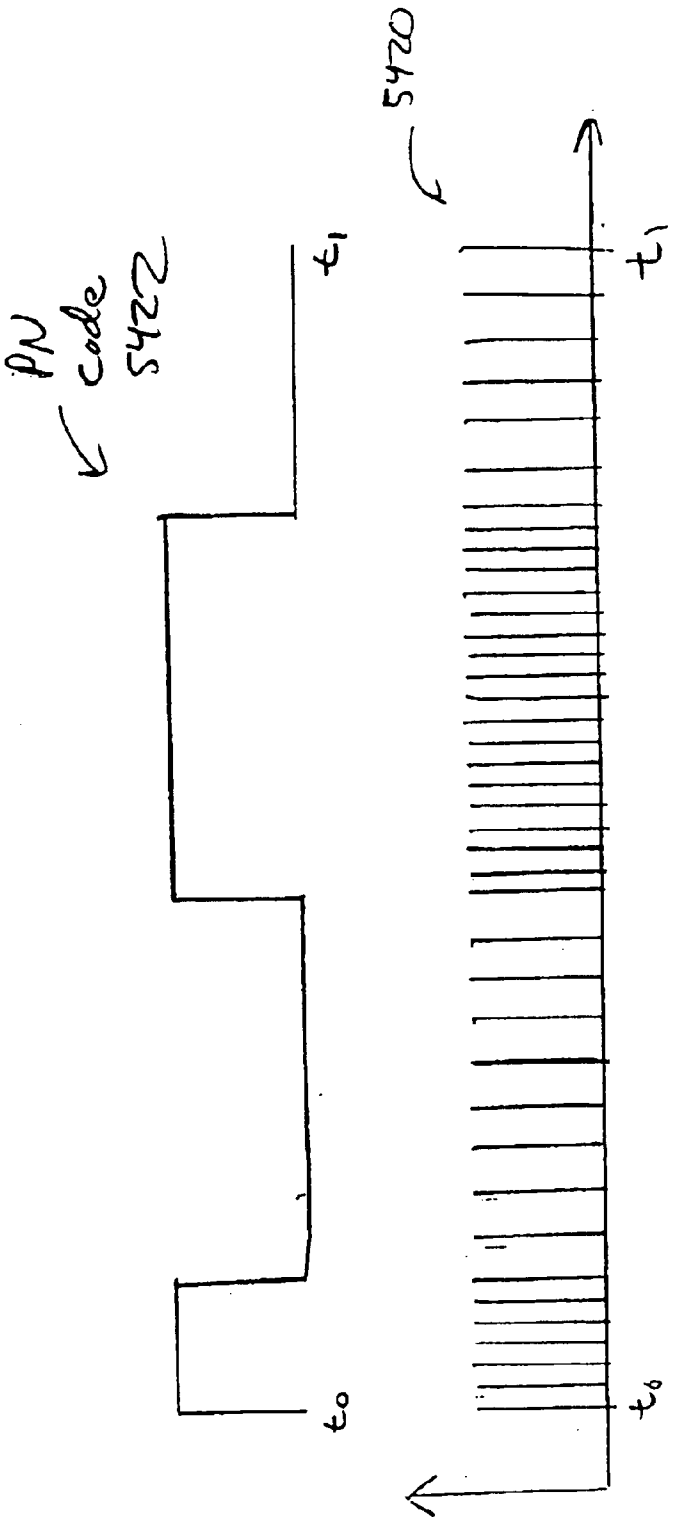


FIG. 54B

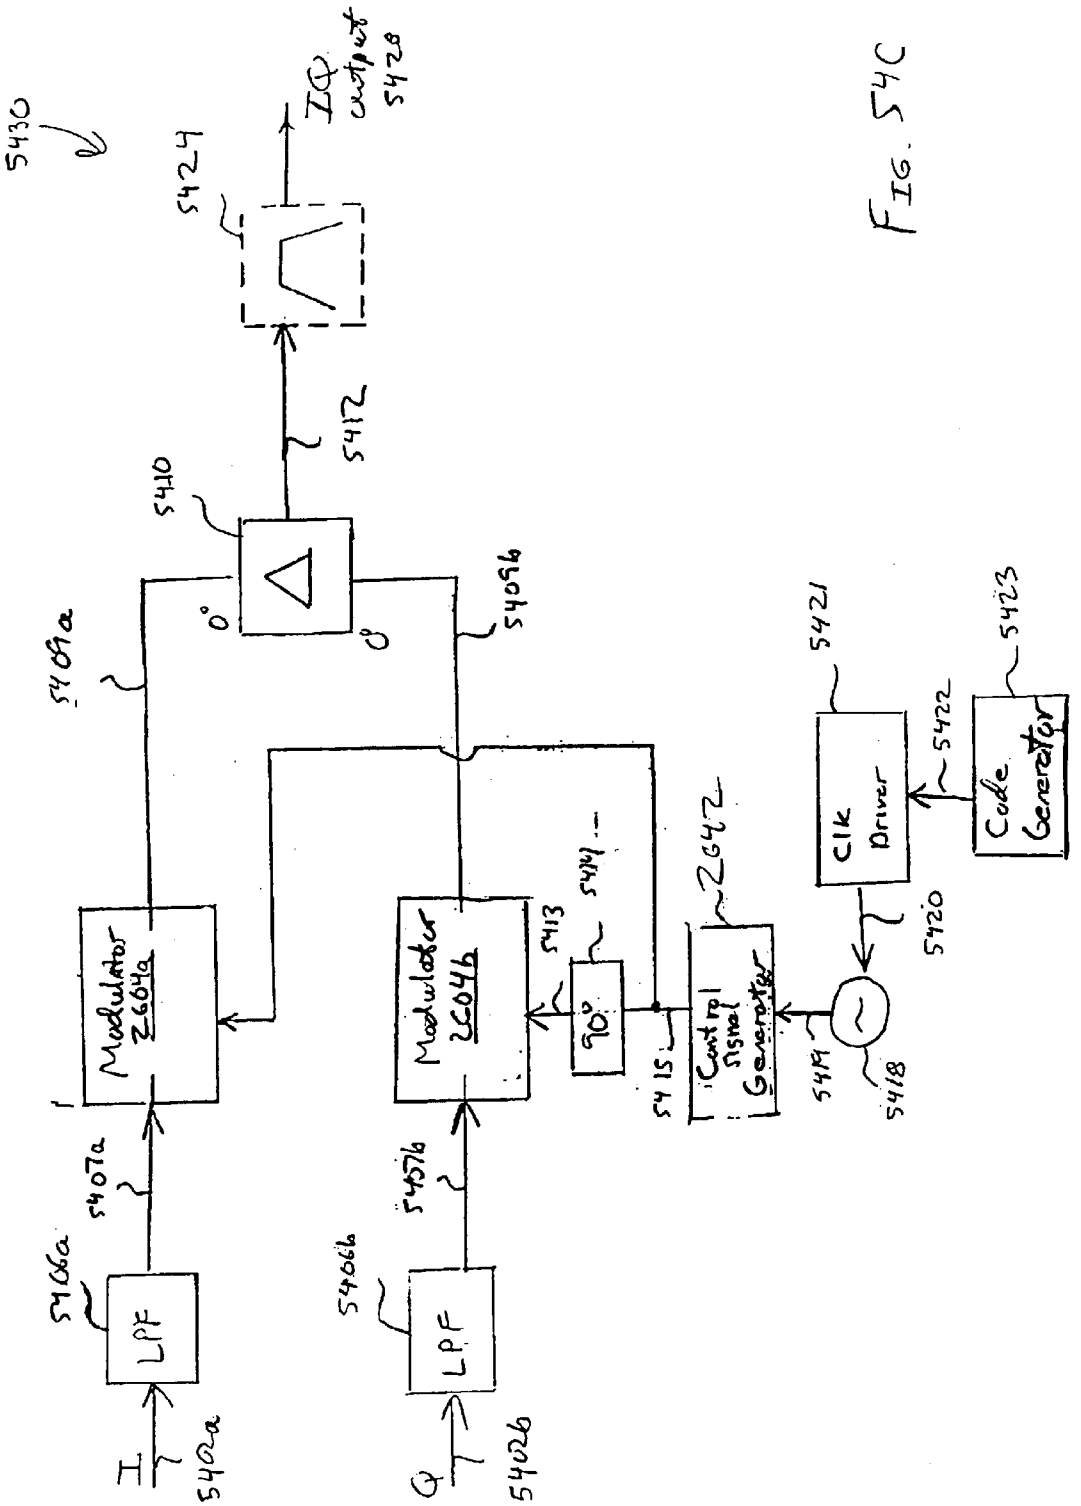

5430
5424
IQ output
5428
5412
5410
0°
θ
5409a
5409b
Modulator 2604a
Modulator 2604b
90°
5413
5414
2642
Control Signal Generator
5415
5419
5418
5420
CLK Driver
5421
5422
Code Generator
5423
5407a
5407b
5406a
5406b
LPF
LPF
I
Q
5402a
5402b

FIG. 54C

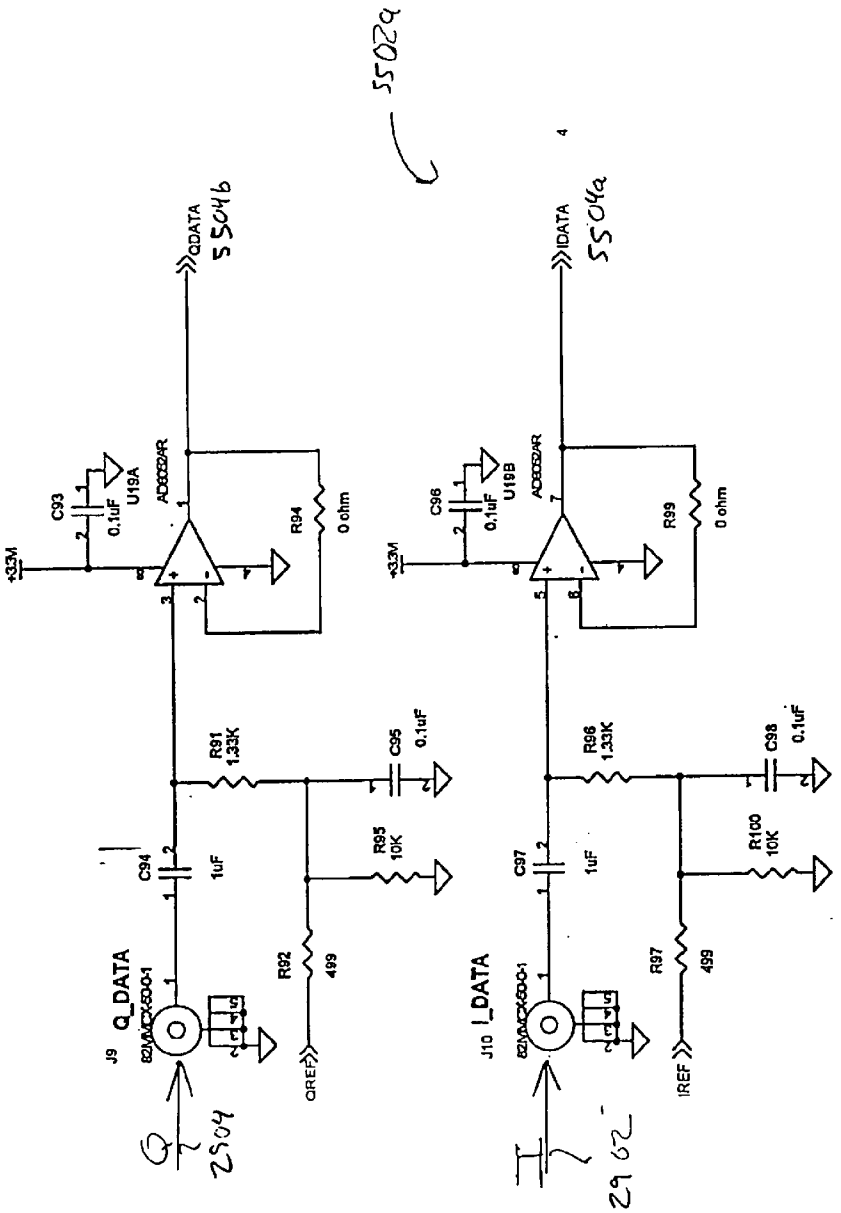

5502b
5502a
5504b
5504a
QDATA
IDATA
C93
0.1uF
U19A
U19B
C96
R94
R99
0 ohm
+3.3M
R91
1.33K
R96
C95
C98
R95
10K
R100
C94
C97
1uF
Q_DATA
I_DATA
J9
J10
R92
R97
499
QREF
IREF
2504
2502

FIG. 55A

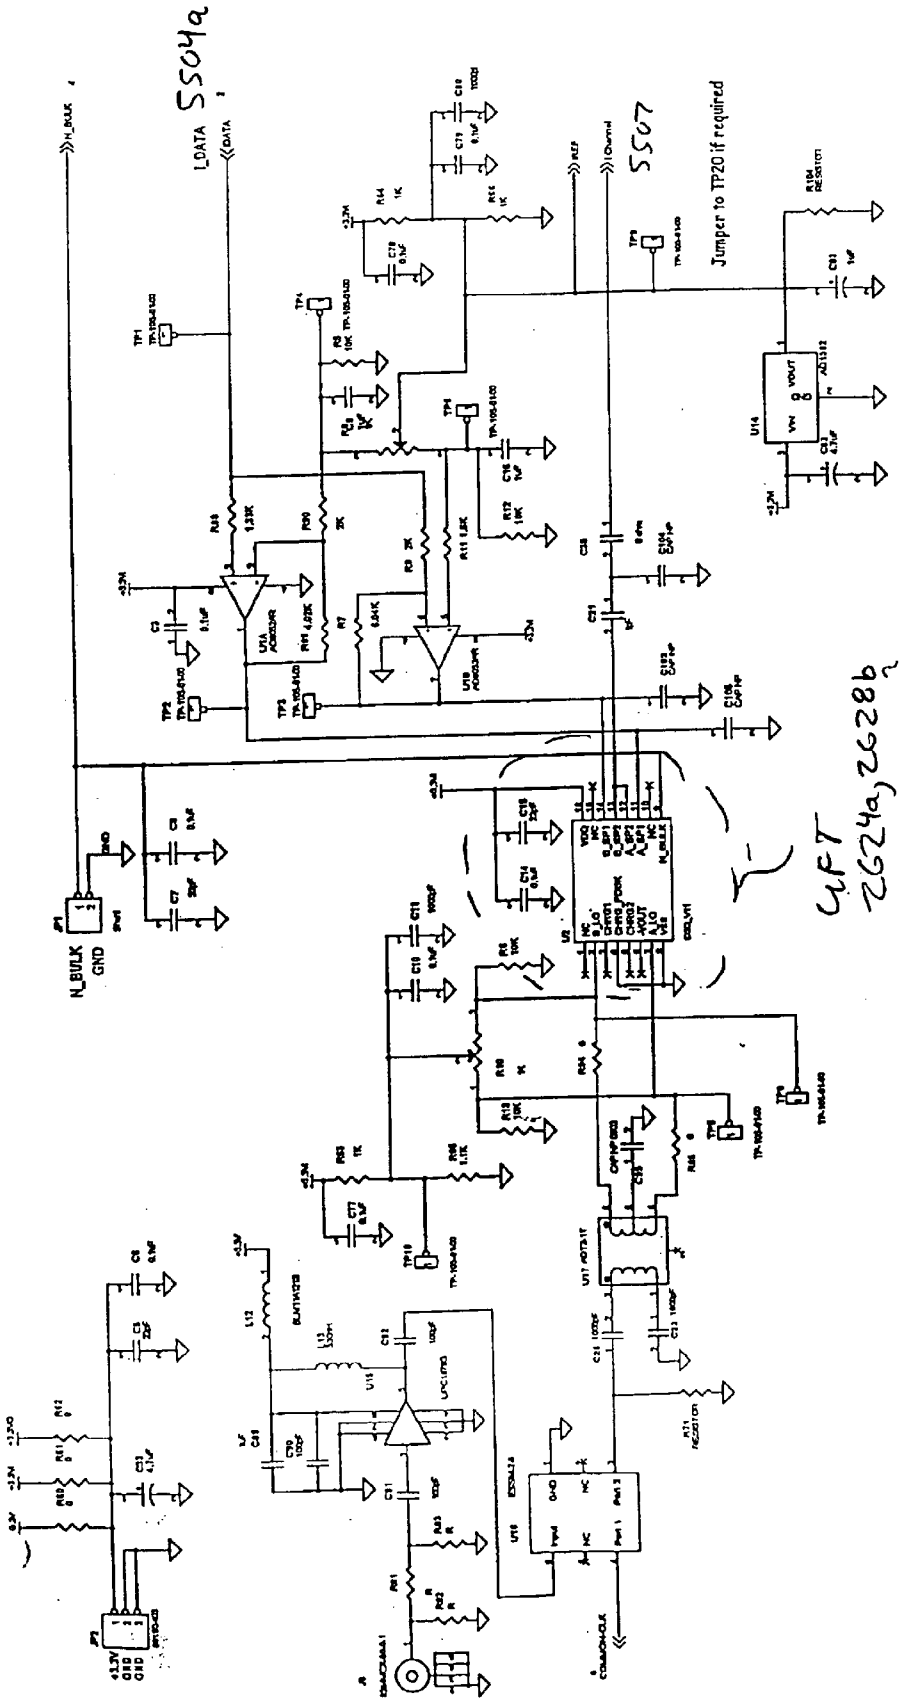

I_DATA
5504a
5507
Jumper to TP20 if required
I channel
5506
N_BULK
GND
U4FT
26724a,26228

FIG. 55B

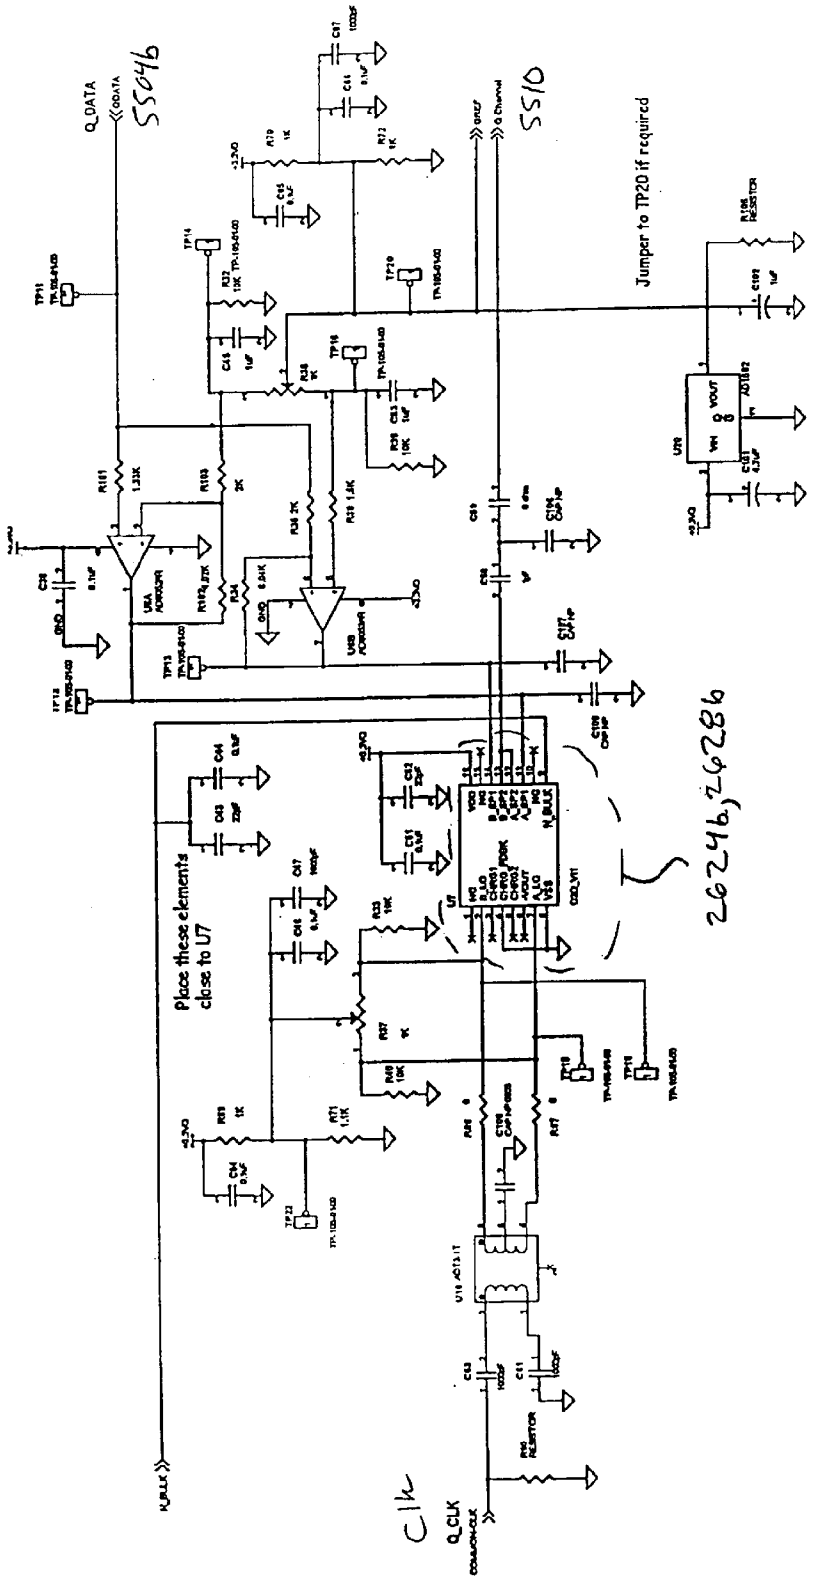

Q DATA
5506
5510
Jumper to TP20 if required
Q Channel
5508
Place these elements close to U7
Clk
Q CLK
26246,26286

FIG. 55C

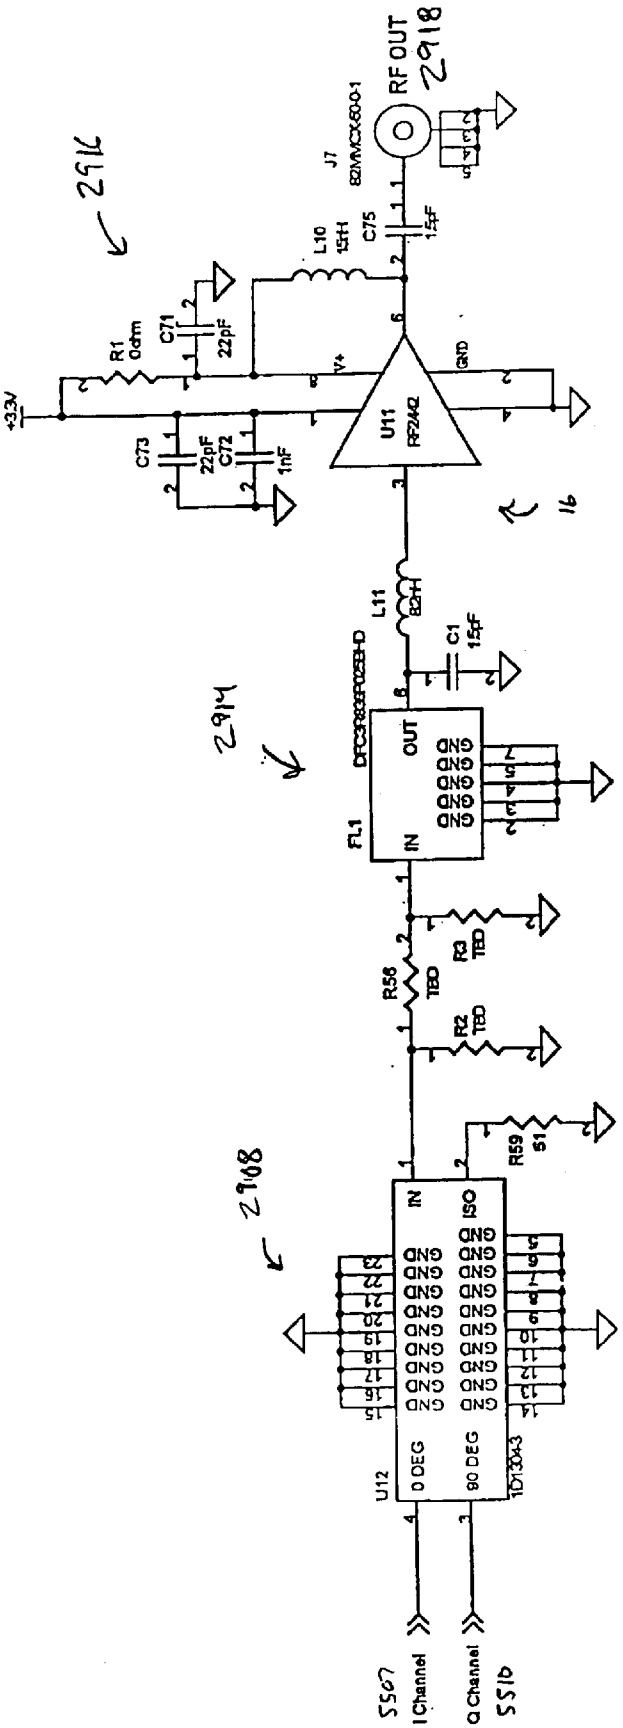

RF OUT
2918
2916
Combiner
5512
2914
2908
5507
I Channel
Q Channel
5510
U12
U11
RF2442
FL1
J7
L10
C75
C71
C73
C72
C1
L11
R1
R56
R3
R2
R59
+3.3V
GND
OUT
IN
ISO
0 DEG
90 DEG

FIG. 550

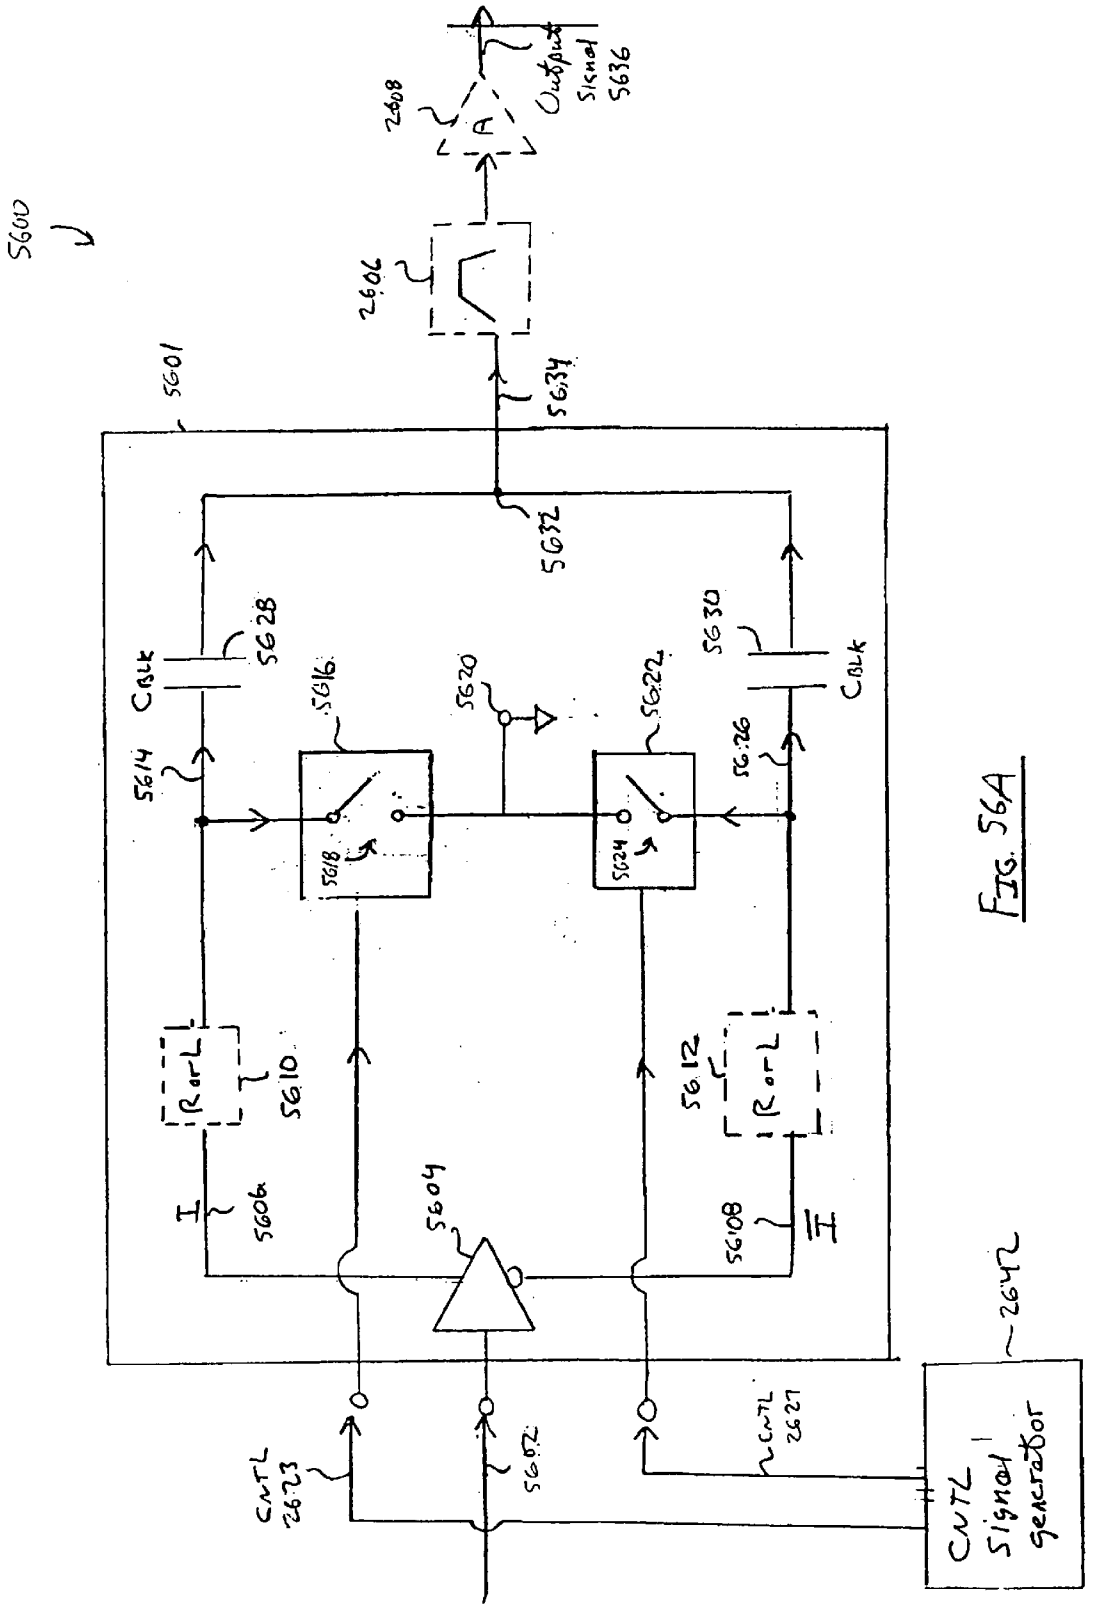

5600
5601
2606
2608
A
Output Signal 5636
5634
5632
5628
Calk
5614
5616
5618
5620
5622
5624
5626
5630
Calk
Ro-L
5610
Ro-L
5612
I
5606
II
5608
5604
CNTL 2623
5602
CNTL 2627
CNTL Signal generator
2642

FIG. 56A

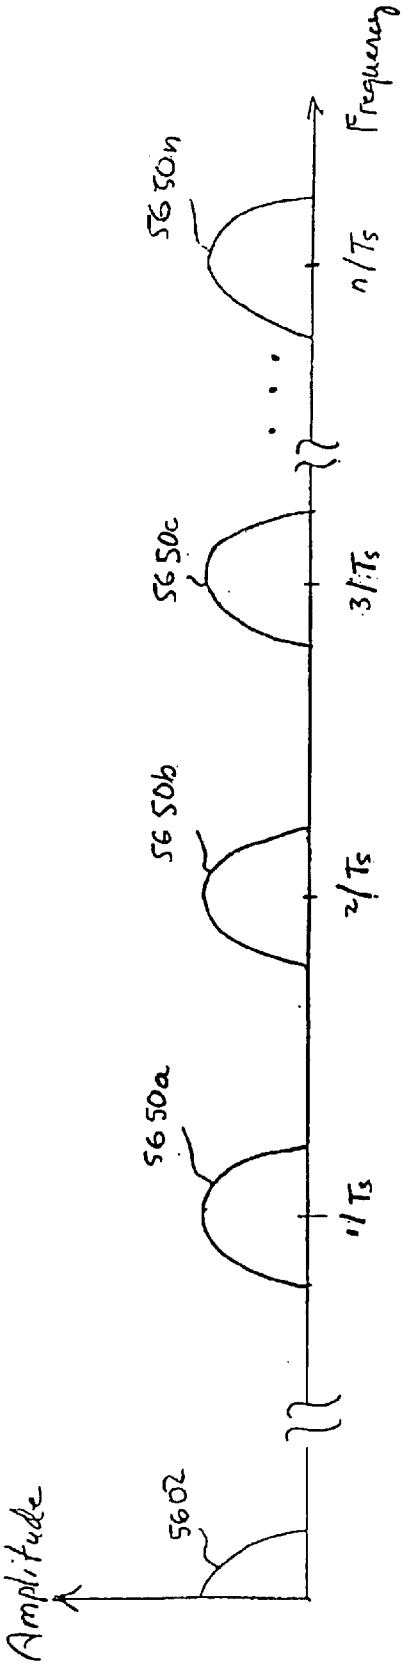

56 14
Amplitude
Frequency
5602
56 50a
56 50b
56 50c
56 50n
1/Ts
2/Ts
3/Ts
n/Ts

FIG. 56B

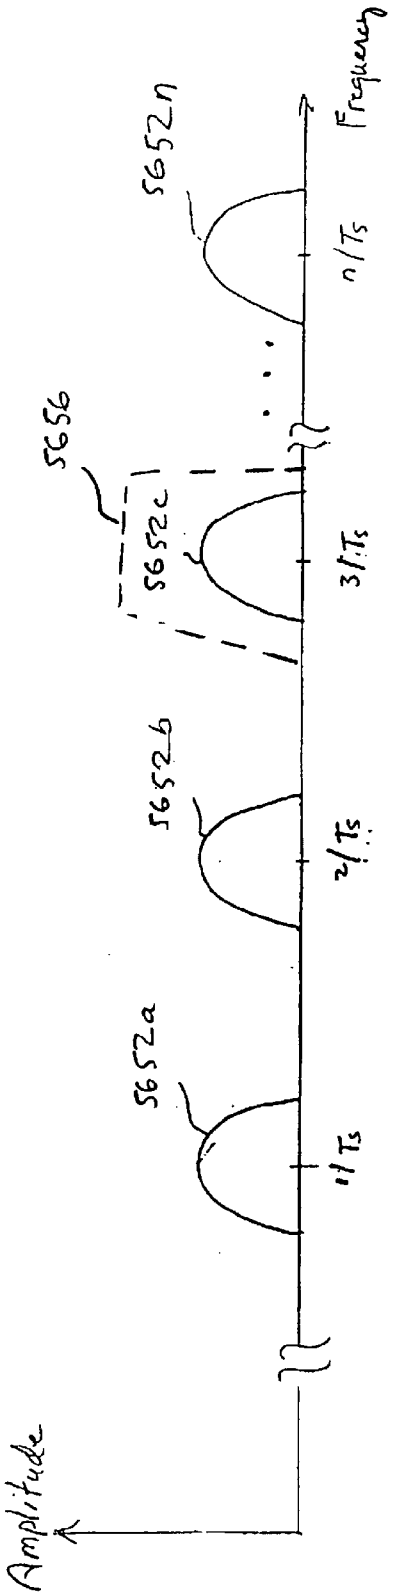

5632
5656
5652a
5652b
5652c
5652n
1/Ts
2/Ts
3/Ts
n/Ts
Frequency
Amplitude

FIG. 56c

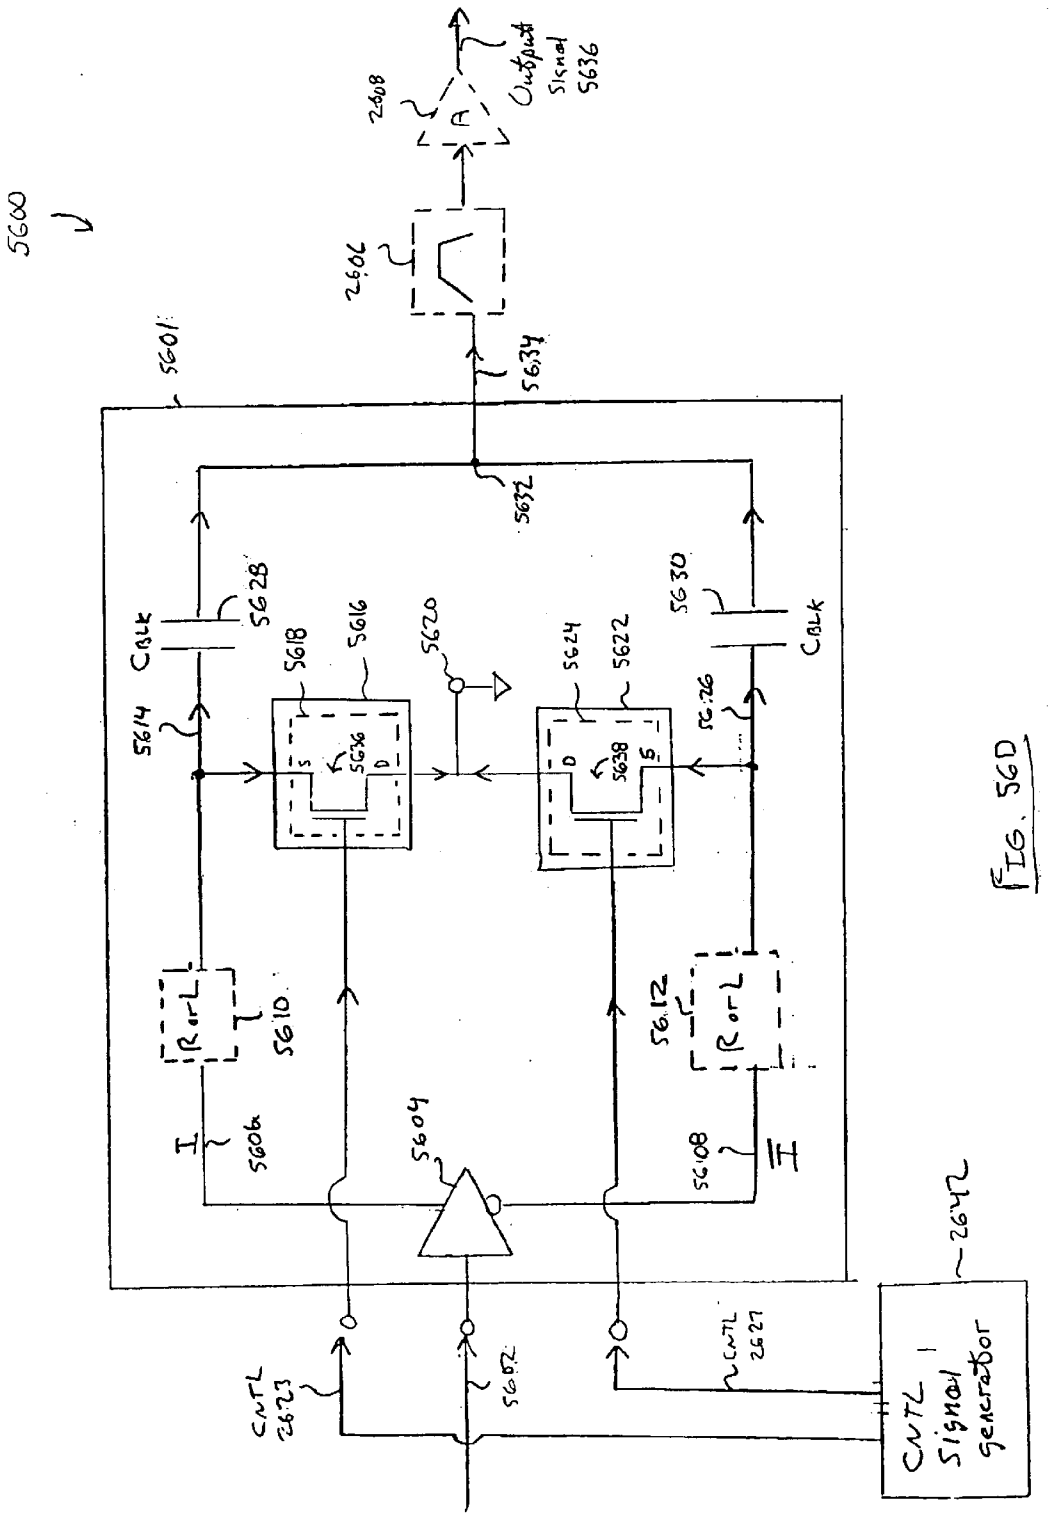

5600
5601
2608
A
Output Signal 5636
2606
5634
5632
5628
Calk
5618
5616
5620
5624
5622
5630
Calk
5614
5636
5638
R or L
5610
5612
R or L
I
5606
5604
5608
II
2642
CNTL Signal generator
CNTL 2623
5602
CNTL 2627

FIG. 56D

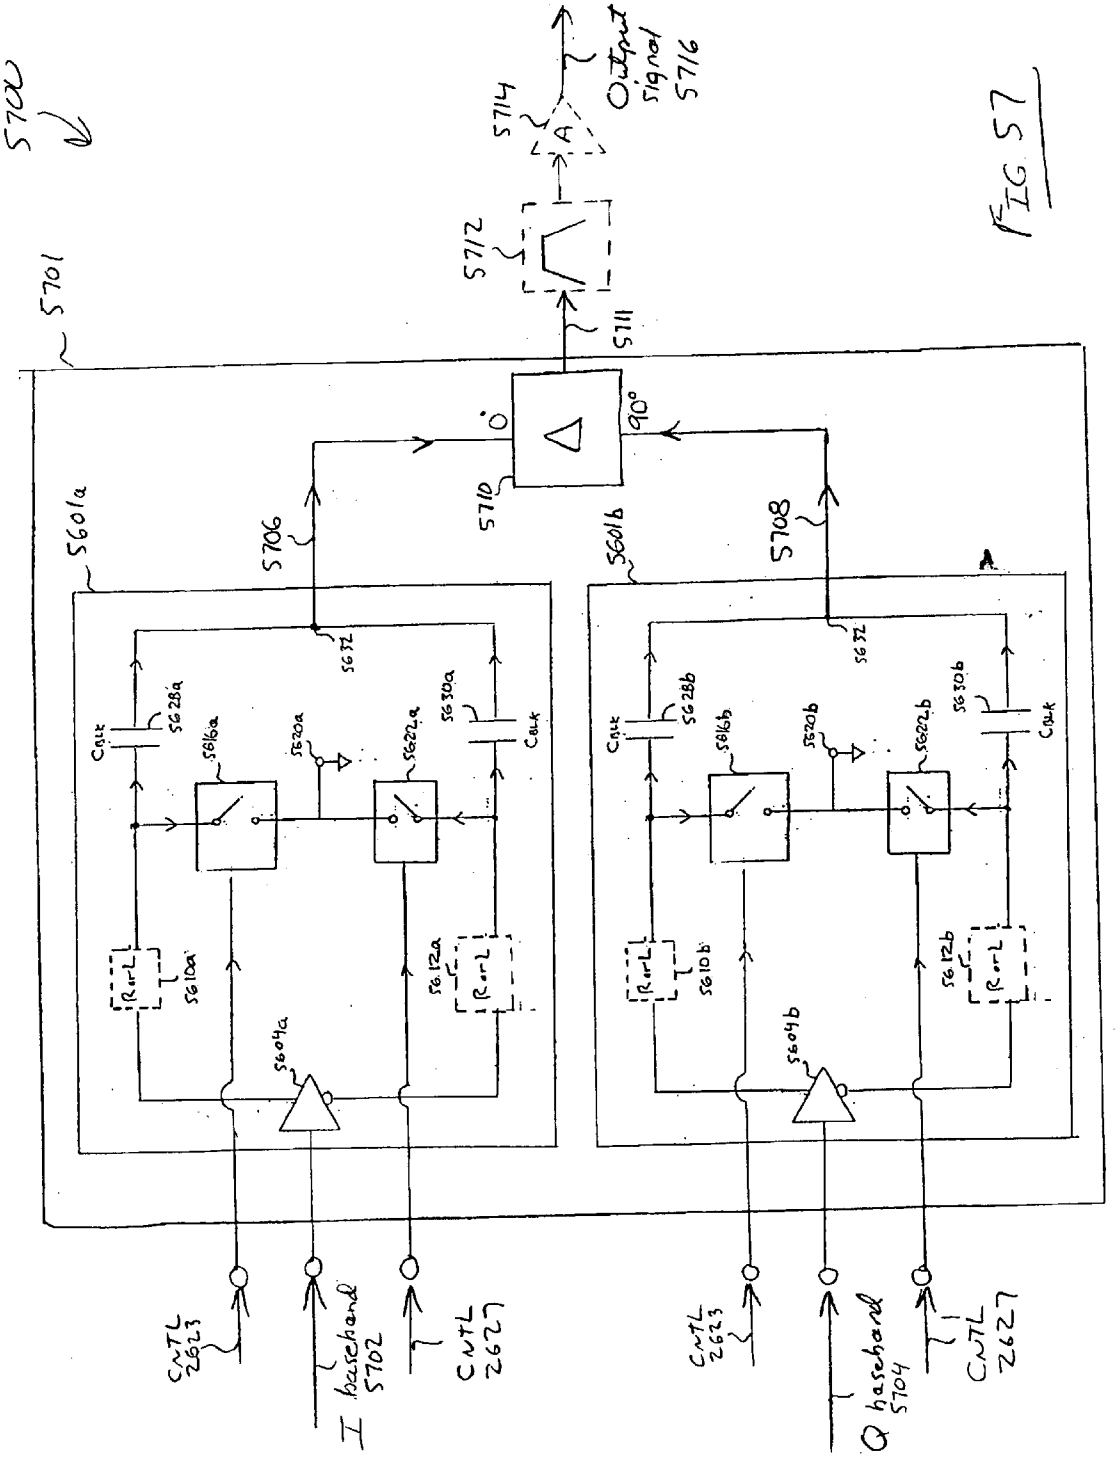

5702
5701
5714
A
Output signal 5716
5712
5711
0°
90°
5710
5706
5708
5601a
5601b
A
5672
5628a
5628b
5616a
5616b
5620a
5620b
5622a
5622b
5630a
5630b
Cblk
5610a
5610b
5612a
5612b
5604a
5604b
CNTL 2623
I baseband 5702
CNTL 2627
CNTL 2623
Q baseband 5704
CNTL 2627

FIG 57

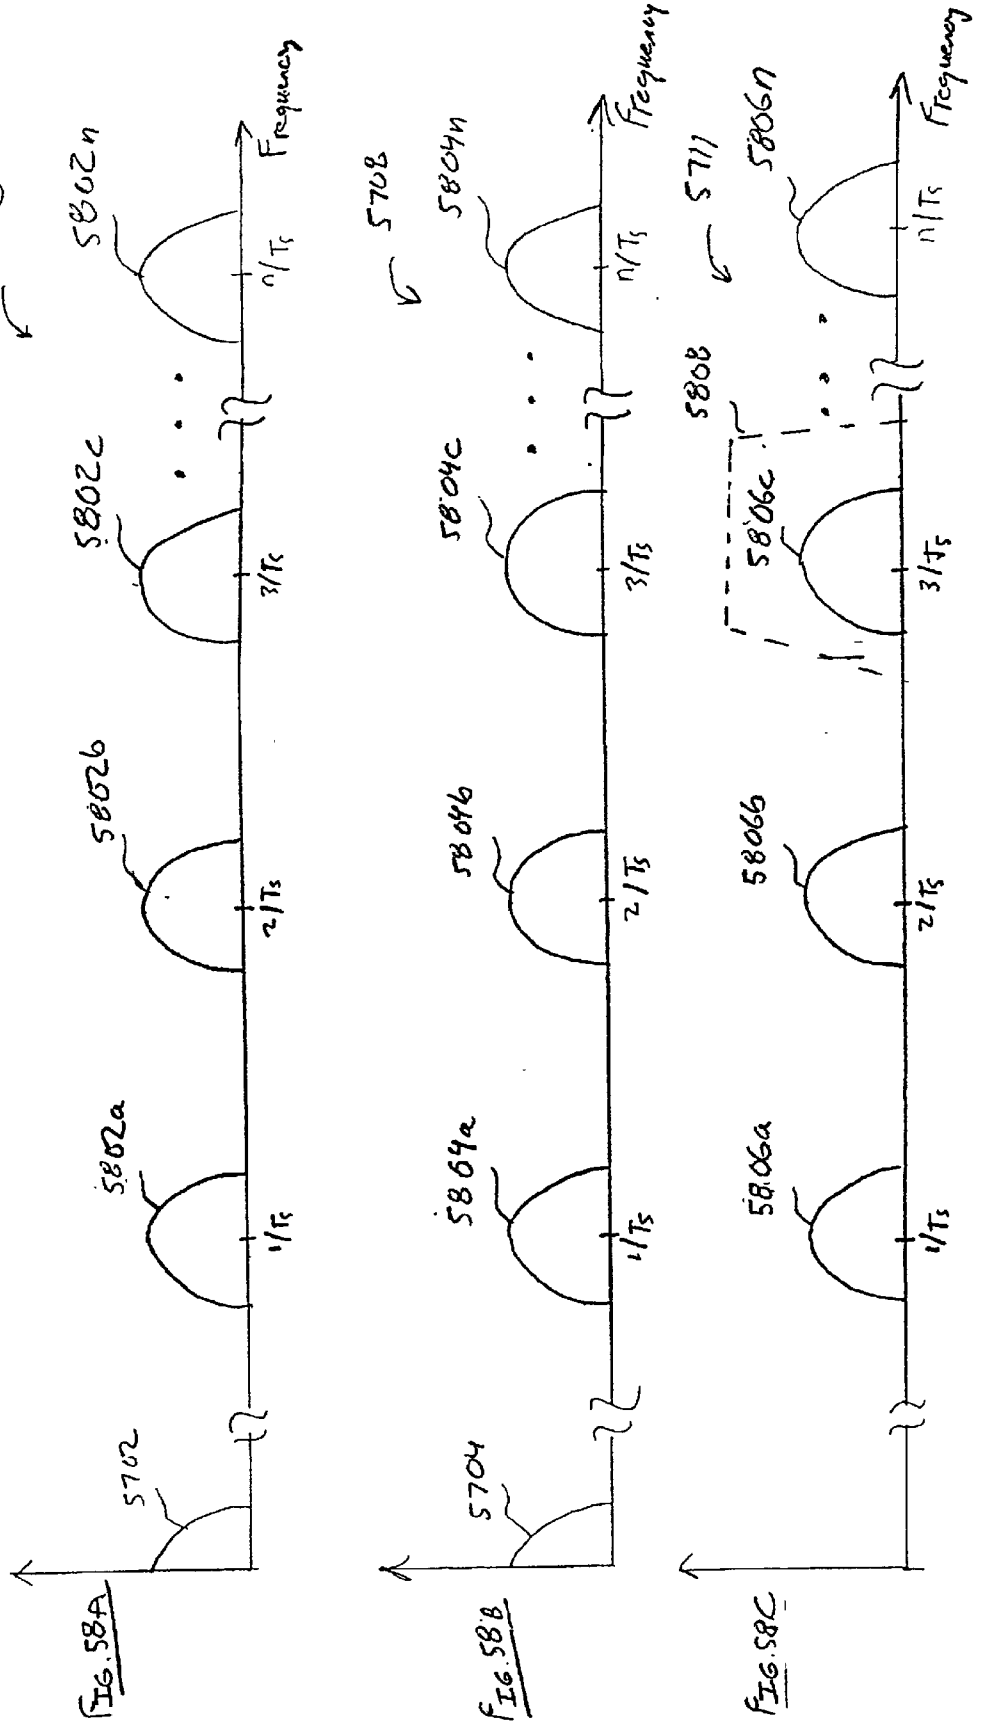


FIG. 58A

FIG. 58B

FIG. 58C

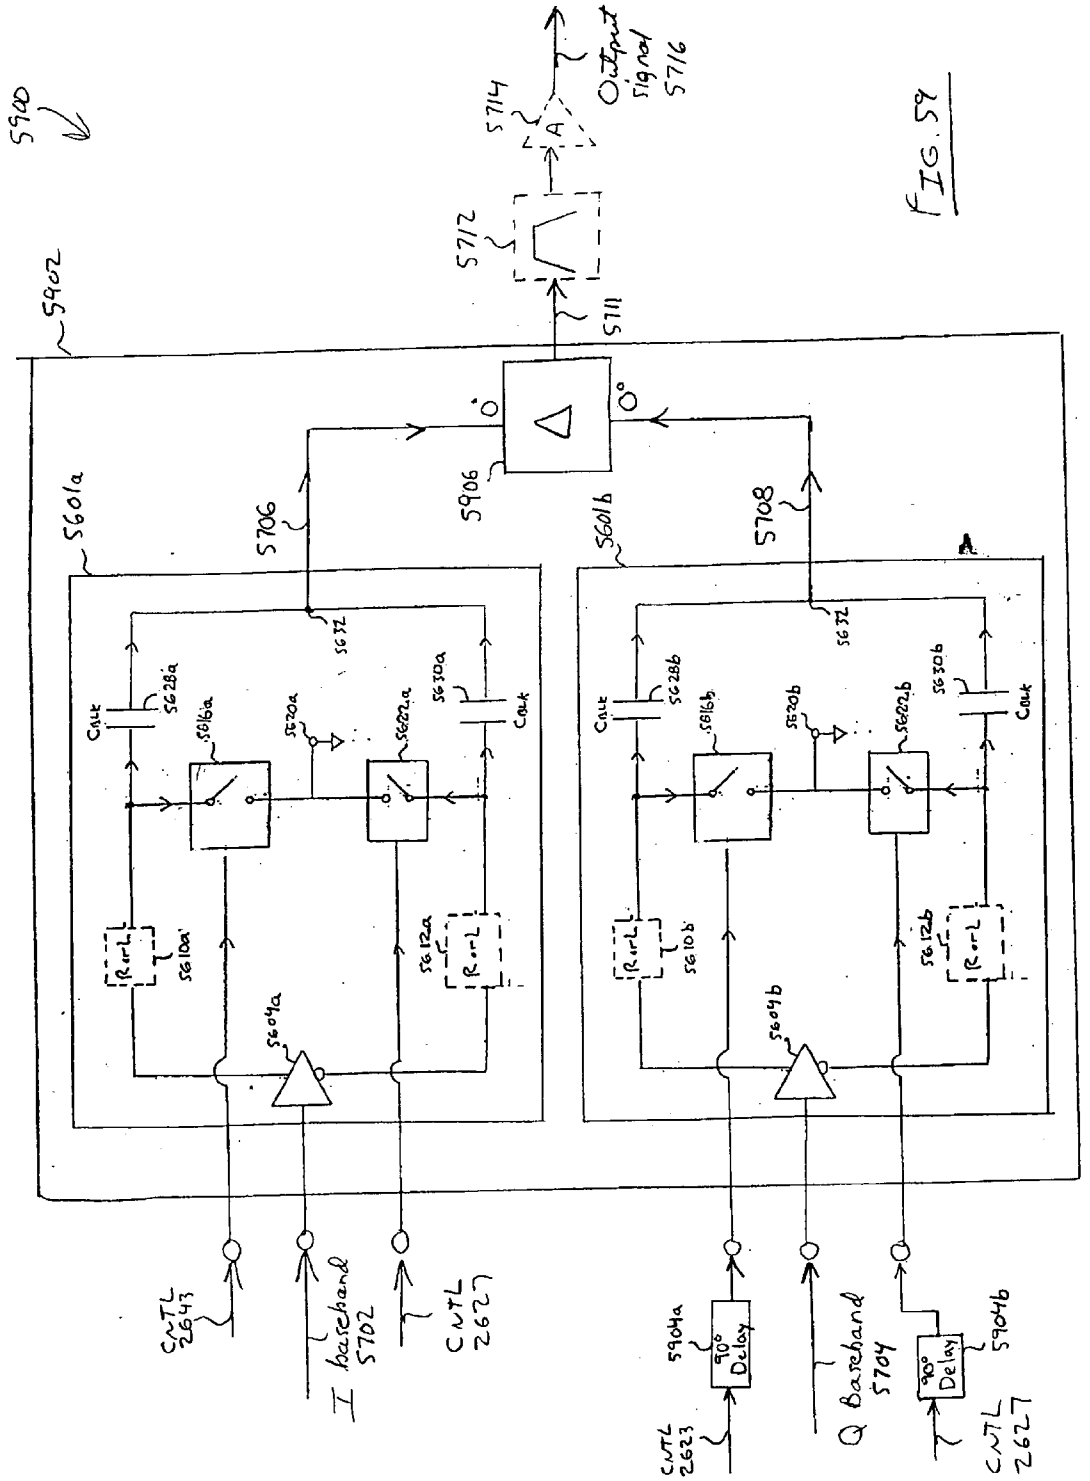

5900
5902
5714
Output signal 5716
5712
5711
5906
5706
5708
5601a
5601b
0°
90°
Delay
CNTL 2643
I baseband 5702
CNTL 2627
Q baseband 5704
CNTL 2623
5904a
5904b

FIG. 59

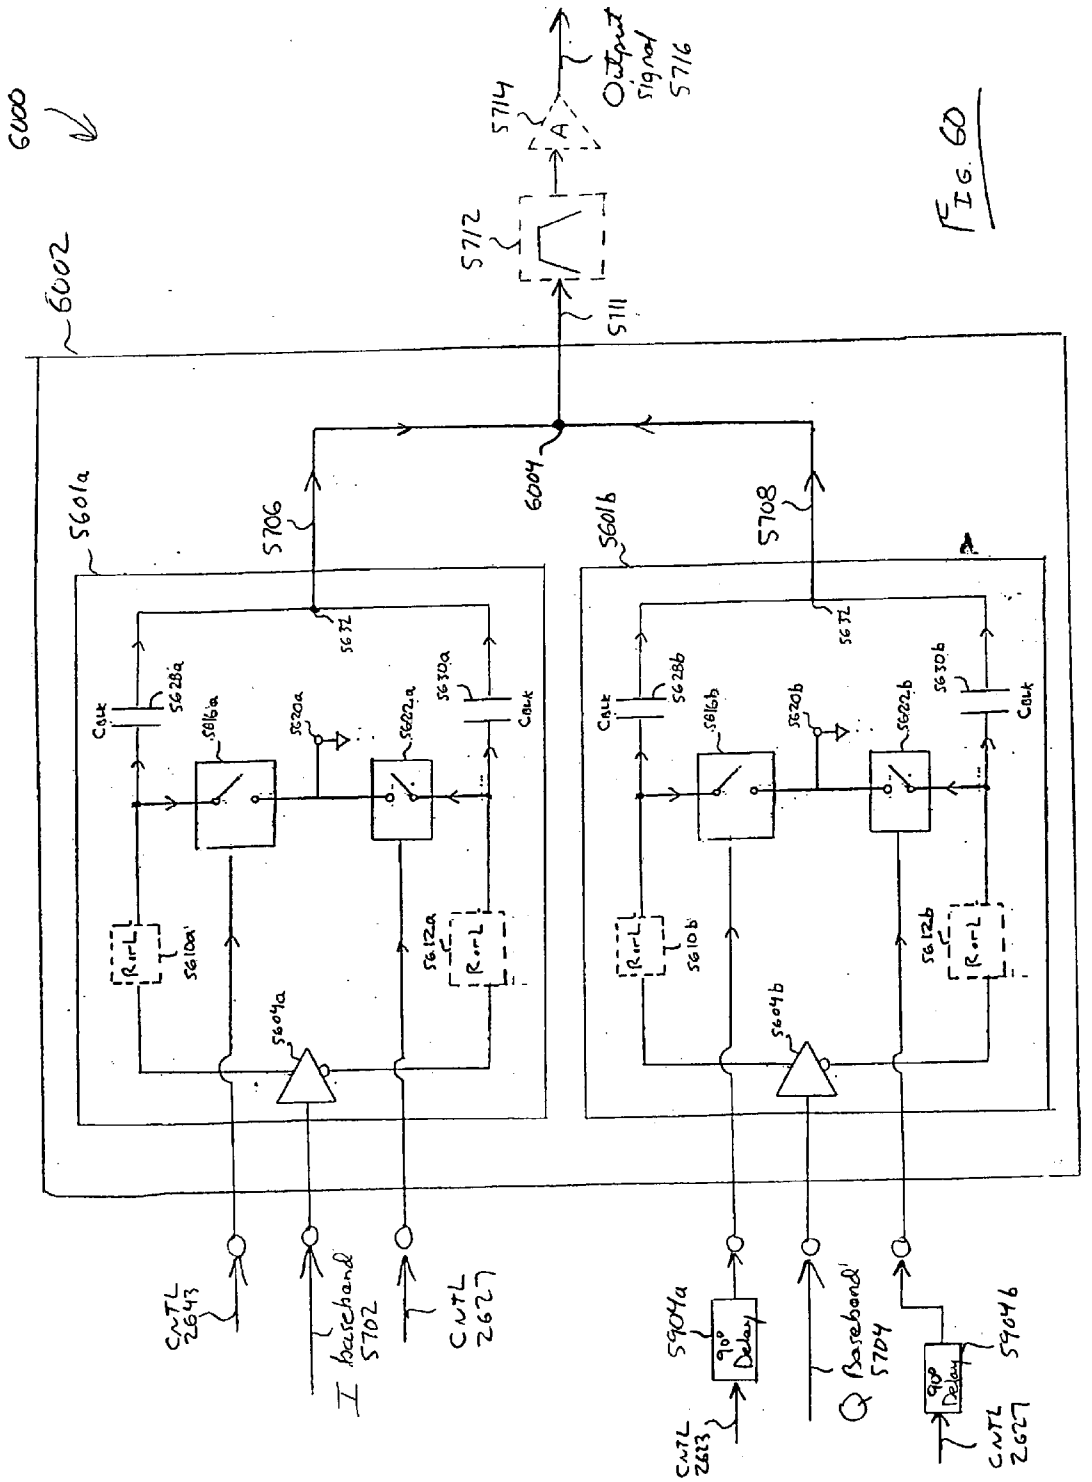

6000
6002
5714
Output signal 5716
5712
5711
6004
5601a
5706
5601b
5708
Cblk
5628a
5616a
5620a
5622a
5630a
5612a
5610a
5604a
5628b
5616b
5620b
5622b
5630b
5612b
5610b
5604b
CNTL 2643
I baseband 5702
CNTL 2627
5904a
90° Delay
CNTL 2613
Q Baseband 5704
5904b
90° Delay
CNTL 2627

FIG. 60

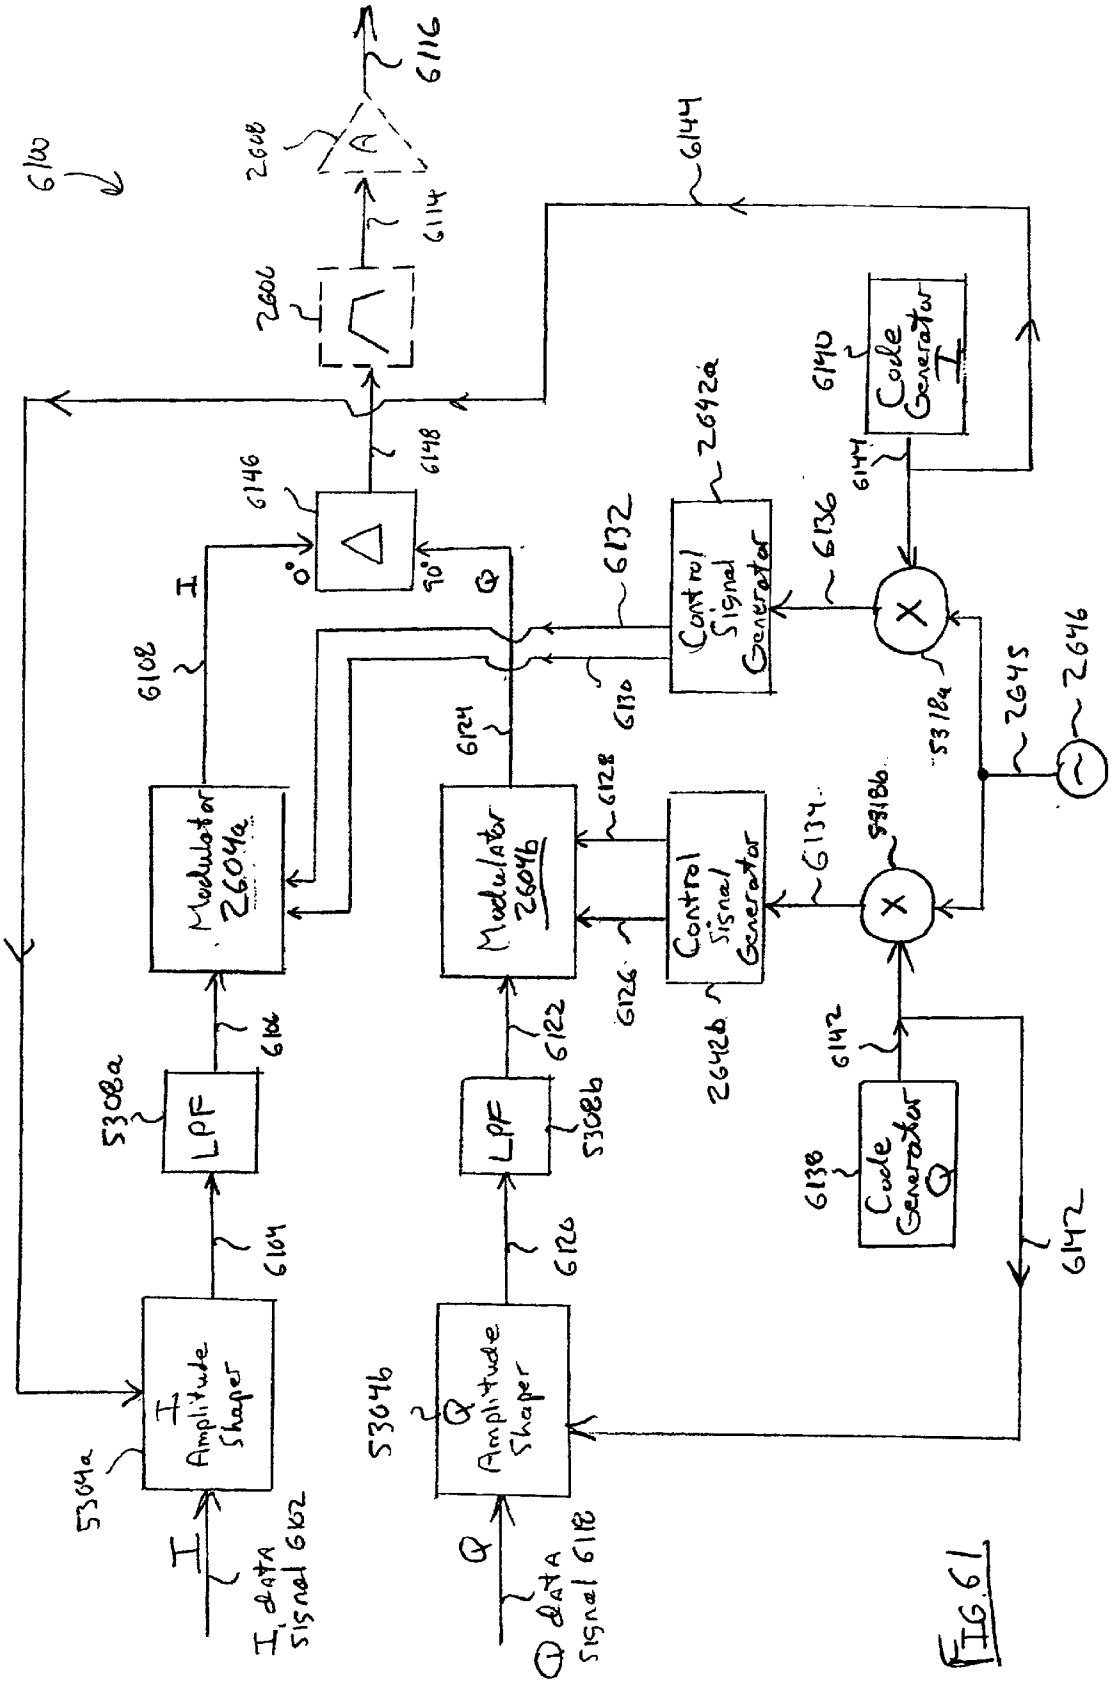

6100
6116
2608
6114
2606
6144
6148
6146
6140
0°
90°
I
Q
6132
6108
6124
6130
6128
6134
6136
6126
6122
6104
6164
6142
6138
6120
5308a
5308b
5304a
5304b
I Amplitude Shaper
Q Amplitude Shaper
LPF
LPF
Modulator 2604a
Modulator 2604b
Control Signal Generator
Control Signal Generator
Code Generator I
Code Generator Q
2642a
2642b
2645
2646
5318a
5318b
I data signal 6102
Q data signal 6118

FIG 61

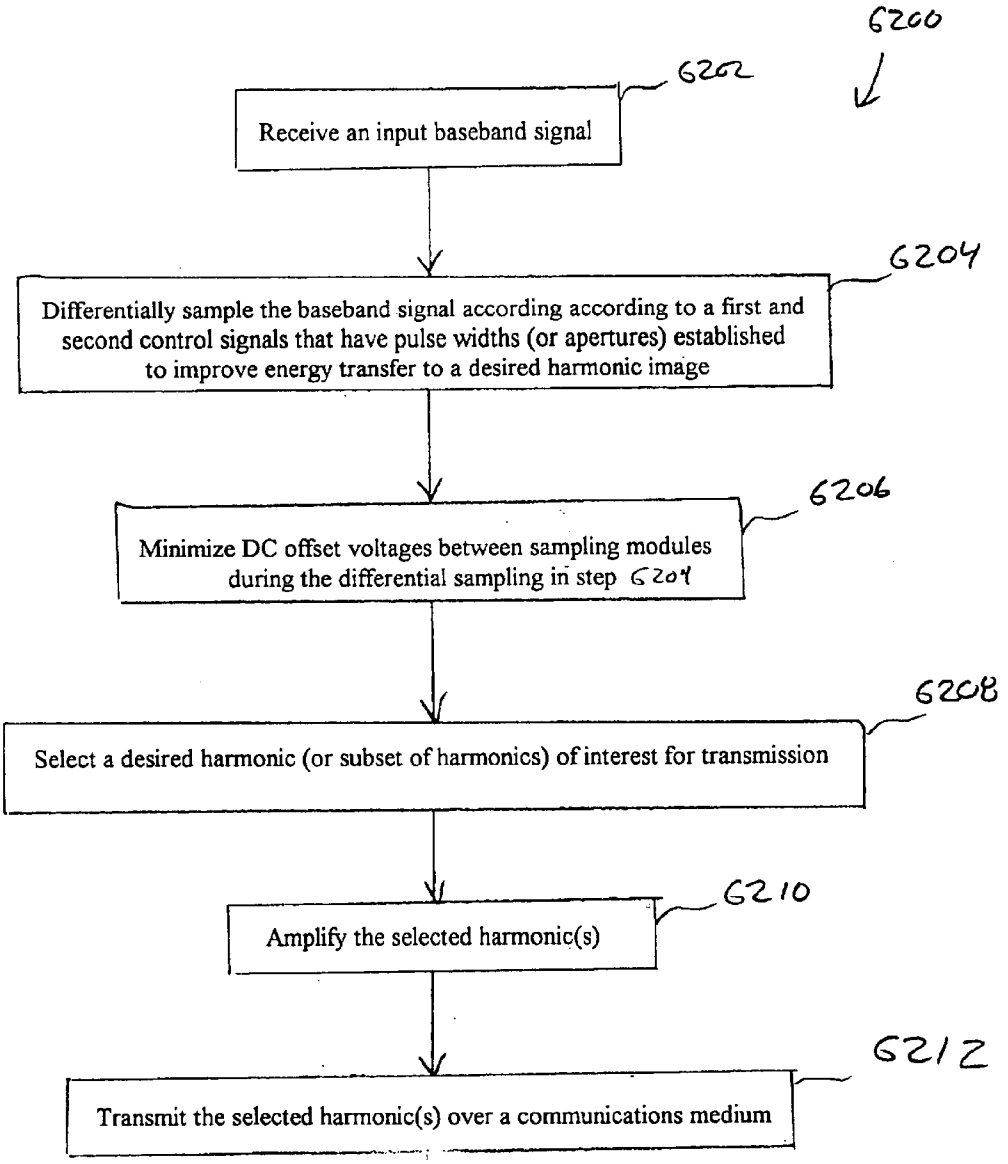

6200
6202
Receive an input baseband signal
6204
Differentially sample the baseband signal according according to a first and second control signals that have pulse widths (or apertures) established to improve energy transfer to a desired harmonic image
6206
Minimize DC offset voltages between sampling modules during the differential sampling in step 6204
6208
Select a desired harmonic (or subset of harmonics) of interest for transmission
6210
Amplify the selected harmonic(s)
6212
Transmit the selected harmonic(s) over a communications medium

FIG. 62

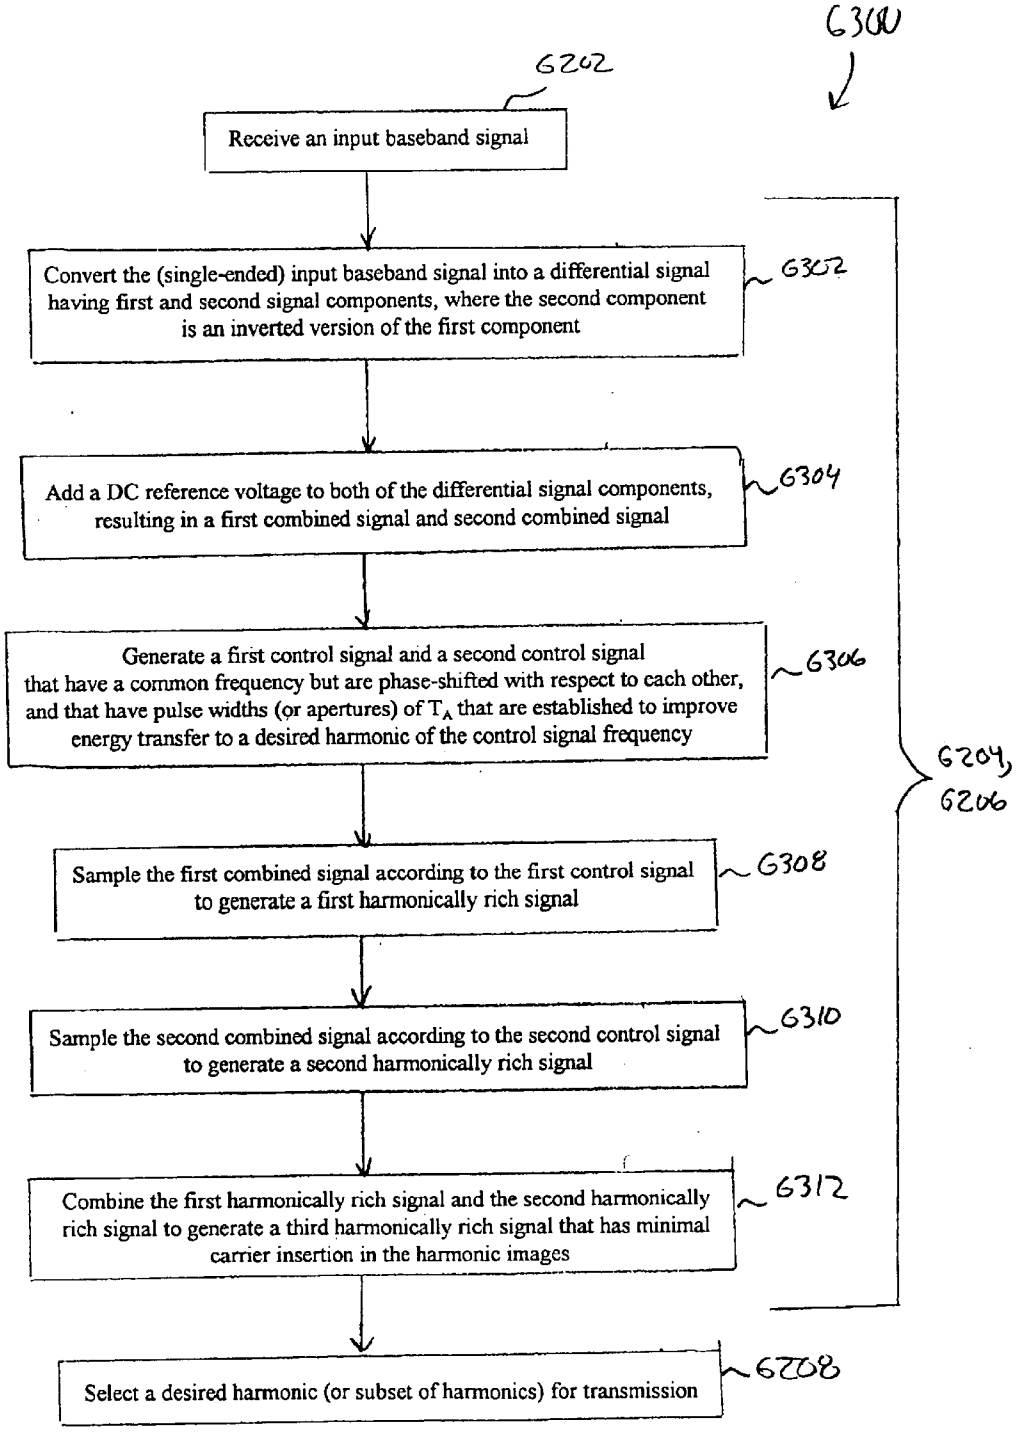

6300
6202
Receive an input baseband signal
Convert the (single-ended) input baseband signal into a differential signal having first and second signal components, where the second component is an inverted version of the first component
6302
Add a DC reference voltage to both of the differential signal components, resulting in a first combined signal and second combined signal
6304
Generate a first control signal and a second control signal that have a common frequency but are phase-shifted with respect to each other, and that have pulse widths (or apertures) of T_A that are established to improve energy transfer to a desired harmonic of the control signal frequency
6306
6204, 6206
Sample the first combined signal according to the first control signal to generate a first harmonically rich signal
6308
Sample the second combined signal according to the second control signal to generate a second harmonically rich signal
6310
Combine the first harmonically rich signal and the second harmonically rich signal to generate a third harmonically rich signal that has minimal carrier insertion in the harmonic images
6312
Select a desired harmonic (or subset of harmonics) for transmission
6208

FIG. 63

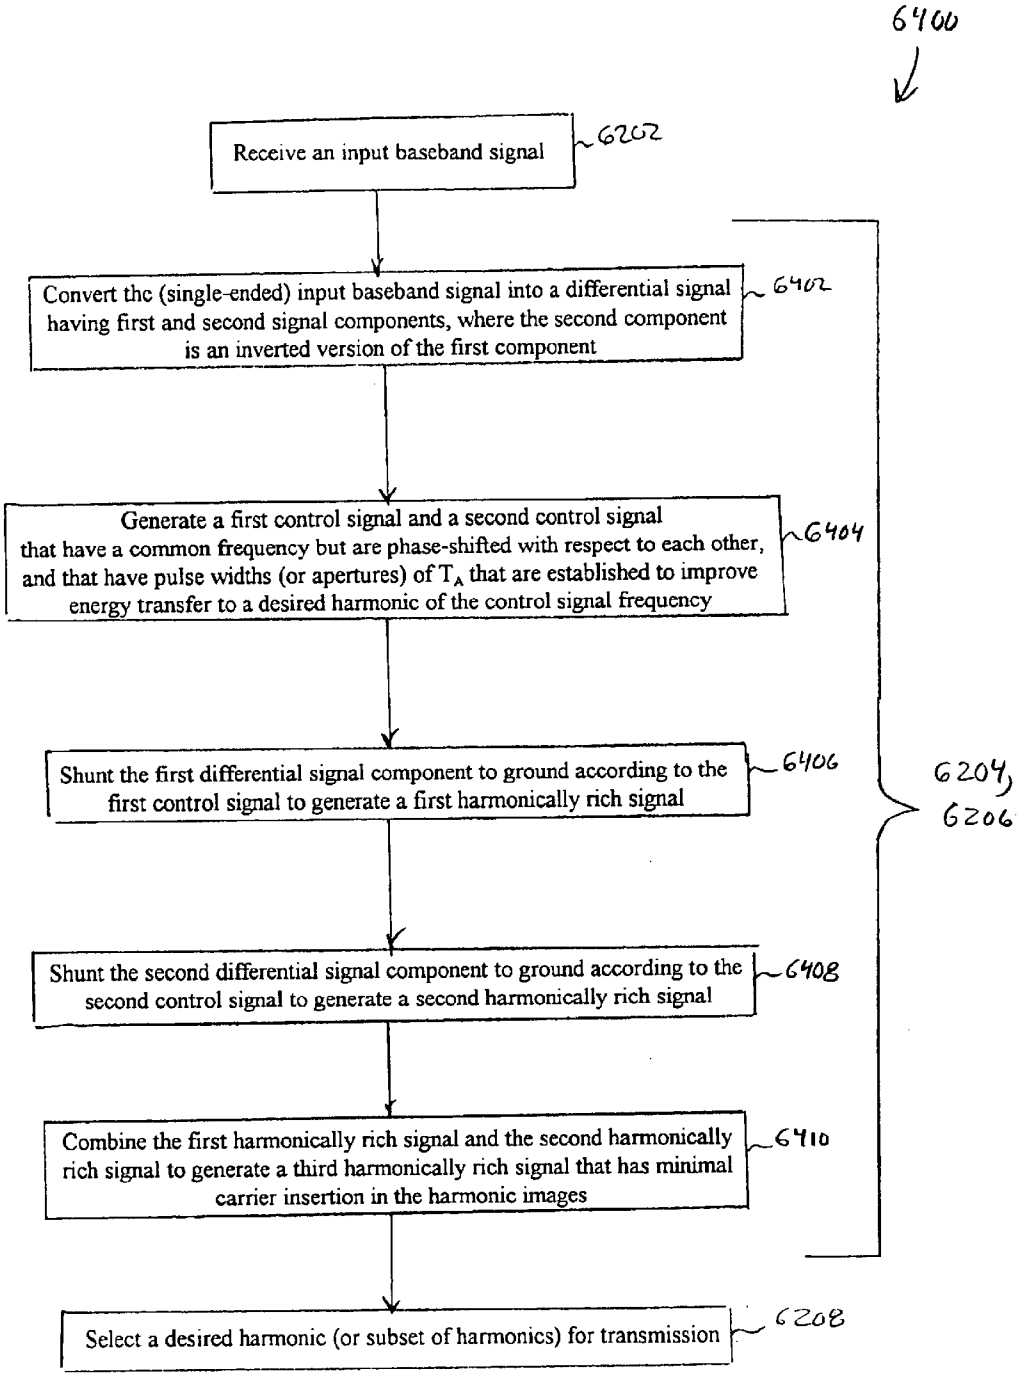

6400
Receive an input baseband signal
6202
Convert the (single-ended) input baseband signal into a differential signal having first and second signal components, where the second component is an inverted version of the first component
6402
Generate a first control signal and a second control signal that have a common frequency but are phase-shifted with respect to each other, and that have pulse widths (or apertures) of T_A that are established to improve energy transfer to a desired harmonic of the control signal frequency
6404
Shunt the first differential signal component to ground according to the first control signal to generate a first harmonically rich signal
6406
Shunt the second differential signal component to ground according to the second control signal to generate a second harmonically rich signal
6408
Combine the first harmonically rich signal and the second harmonically rich signal to generate a third harmonically rich signal that has minimal carrier insertion in the harmonic images
6410
Select a desired harmonic (or subset of harmonics) for transmission
6208
6204, 6206

FIG. 64

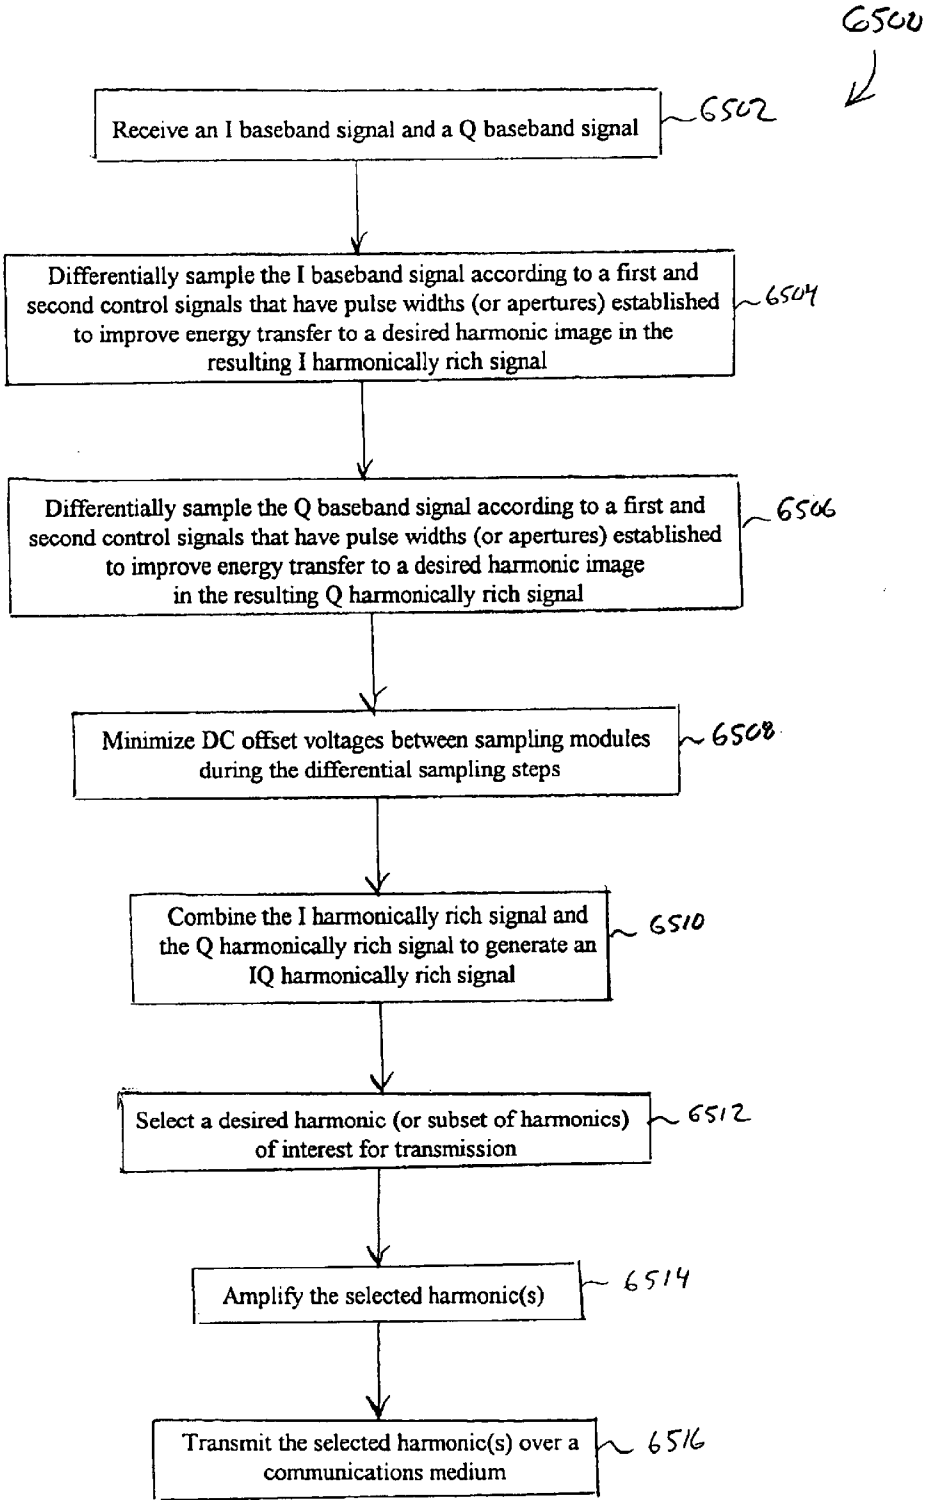

6500
Receive an I baseband signal and a Q baseband signal
6502
Differentially sample the I baseband signal according to a first and second control signals that have pulse widths (or apertures) established to improve energy transfer to a desired harmonic image in the resulting I harmonically rich signal
6504
Differentially sample the Q baseband signal according to a first and second control signals that have pulse widths (or apertures) established to improve energy transfer to a desired harmonic image in the resulting Q harmonically rich signal
6506
Minimize DC offset voltages between sampling modules during the differential sampling steps
6508
Combine the I harmonically rich signal and the Q harmonically rich signal to generate an IQ harmonically rich signal
6510
Select a desired harmonic (or subset of harmonics) of interest for transmission
6512
Amplify the selected harmonic(s)
6514
Transmit the selected harmonic(s) over a communications medium
6516

FIG. 65

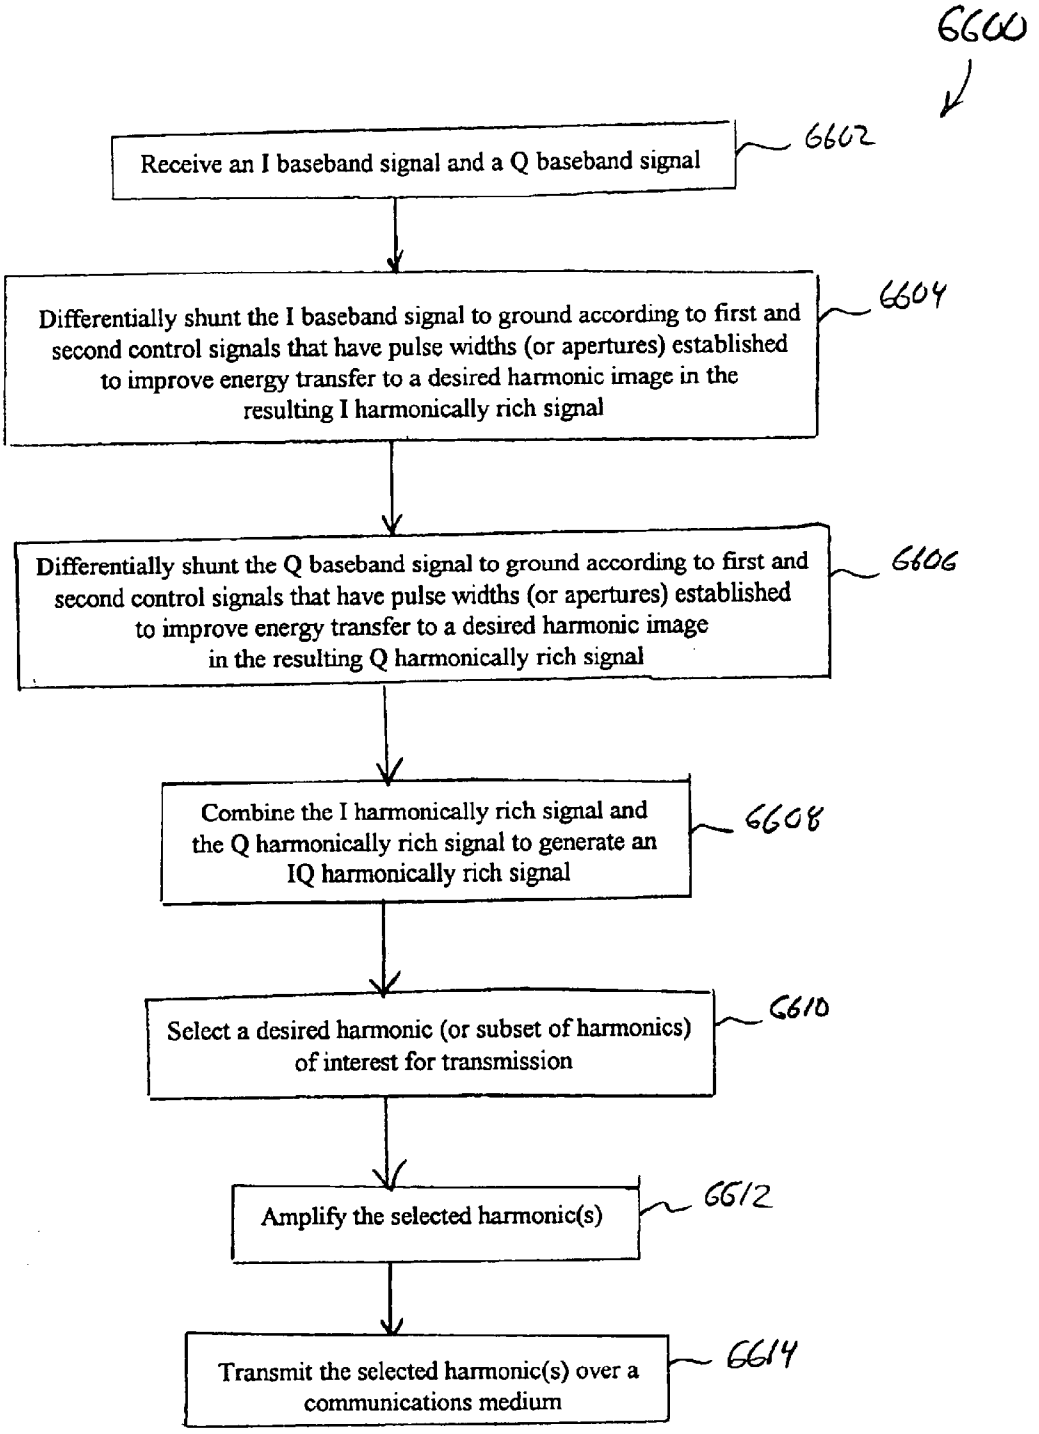

6600
Receive an I baseband signal and a Q baseband signal
6602
Differentially shunt the I baseband signal to ground according to first and second control signals that have pulse widths (or apertures) established to improve energy transfer to a desired harmonic image in the resulting I harmonically rich signal
6604
Differentially shunt the Q baseband signal to ground according to first and second control signals that have pulse widths (or apertures) established to improve energy transfer to a desired harmonic image in the resulting Q harmonically rich signal
6606
Combine the I harmonically rich signal and the Q harmonically rich signal to generate an IQ harmonically rich signal
6608
Select a desired harmonic (or subset of harmonics) of interest for transmission
6610
Amplify the selected harmonic(s)
6612
Transmit the selected harmonic(s) over a communications medium
6614

FIG. 66

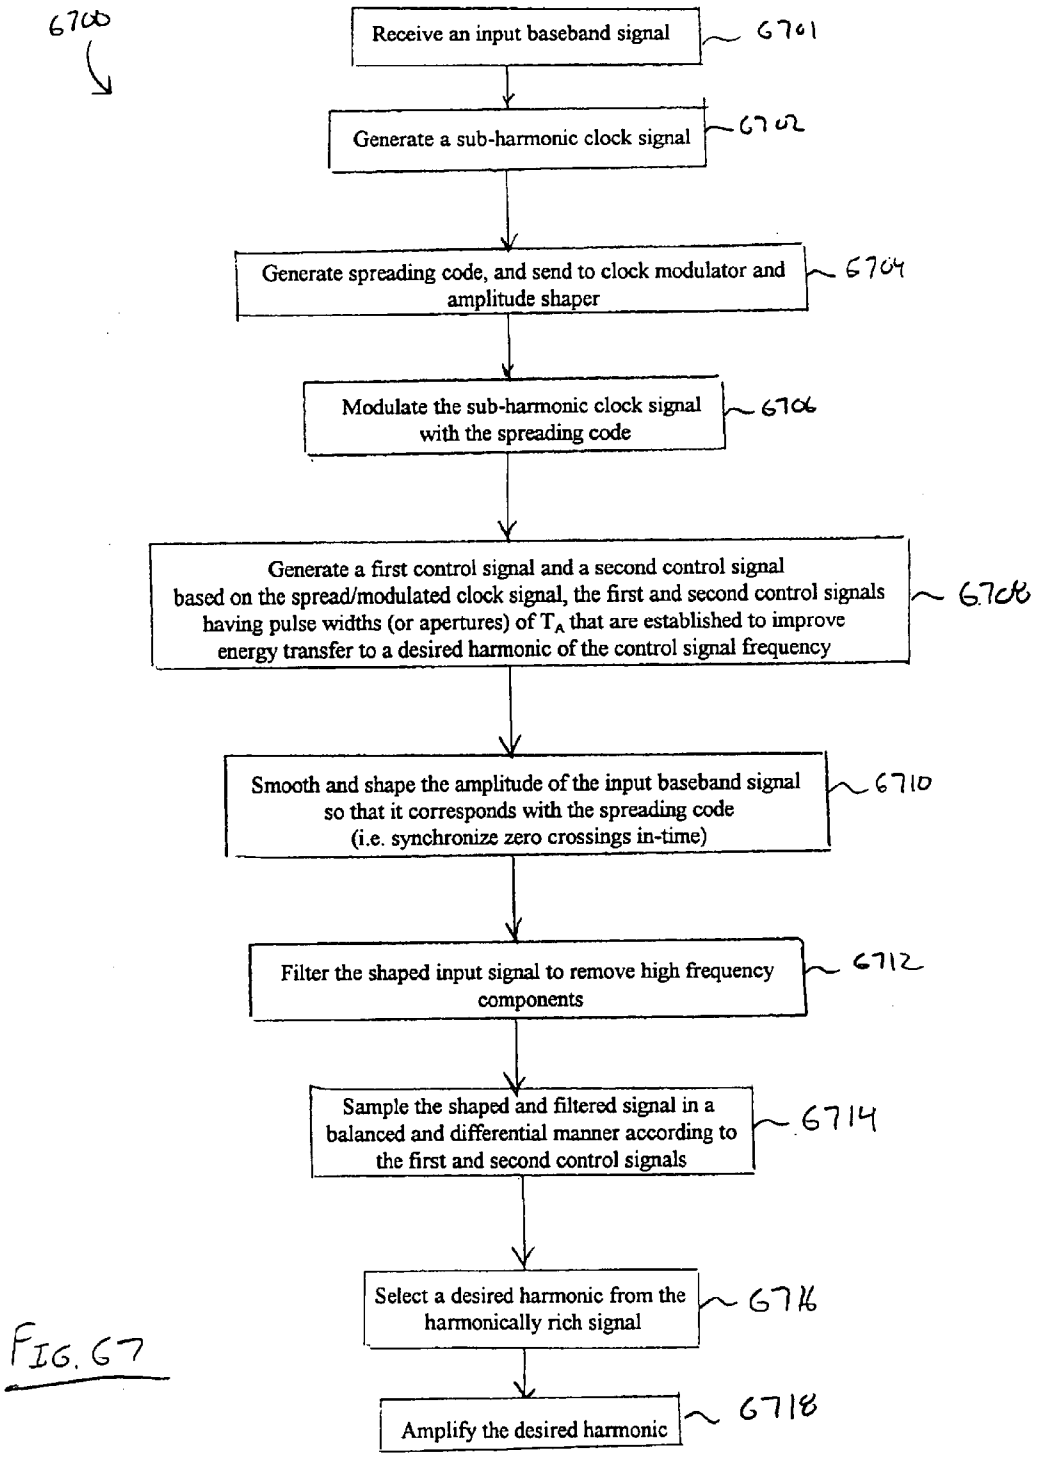

6700
Receive an input baseband signal
6701
Generate a sub-harmonic clock signal
6702
Generate spreading code, and send to clock modulator and amplitude shaper
6704
Modulate the sub-harmonic clock signal with the spreading code
6706
Generate a first control signal and a second control signal based on the spread/modulated clock signal, the first and second control signals having pulse widths (or apertures) of T_A that are established to improve energy transfer to a desired harmonic of the control signal frequency
6708
Smooth and shape the amplitude of the input baseband signal so that it corresponds with the spreading code (i.e. synchronize zero crossings in-time)
6710
Filter the shaped input signal to remove high frequency components
6712
Sample the shaped and filtered signal in a balanced and differential manner according to the first and second control signals
6714
Select a desired harmonic from the harmonically rich signal
6716
Amplify the desired harmonic
6718

FIG. 67

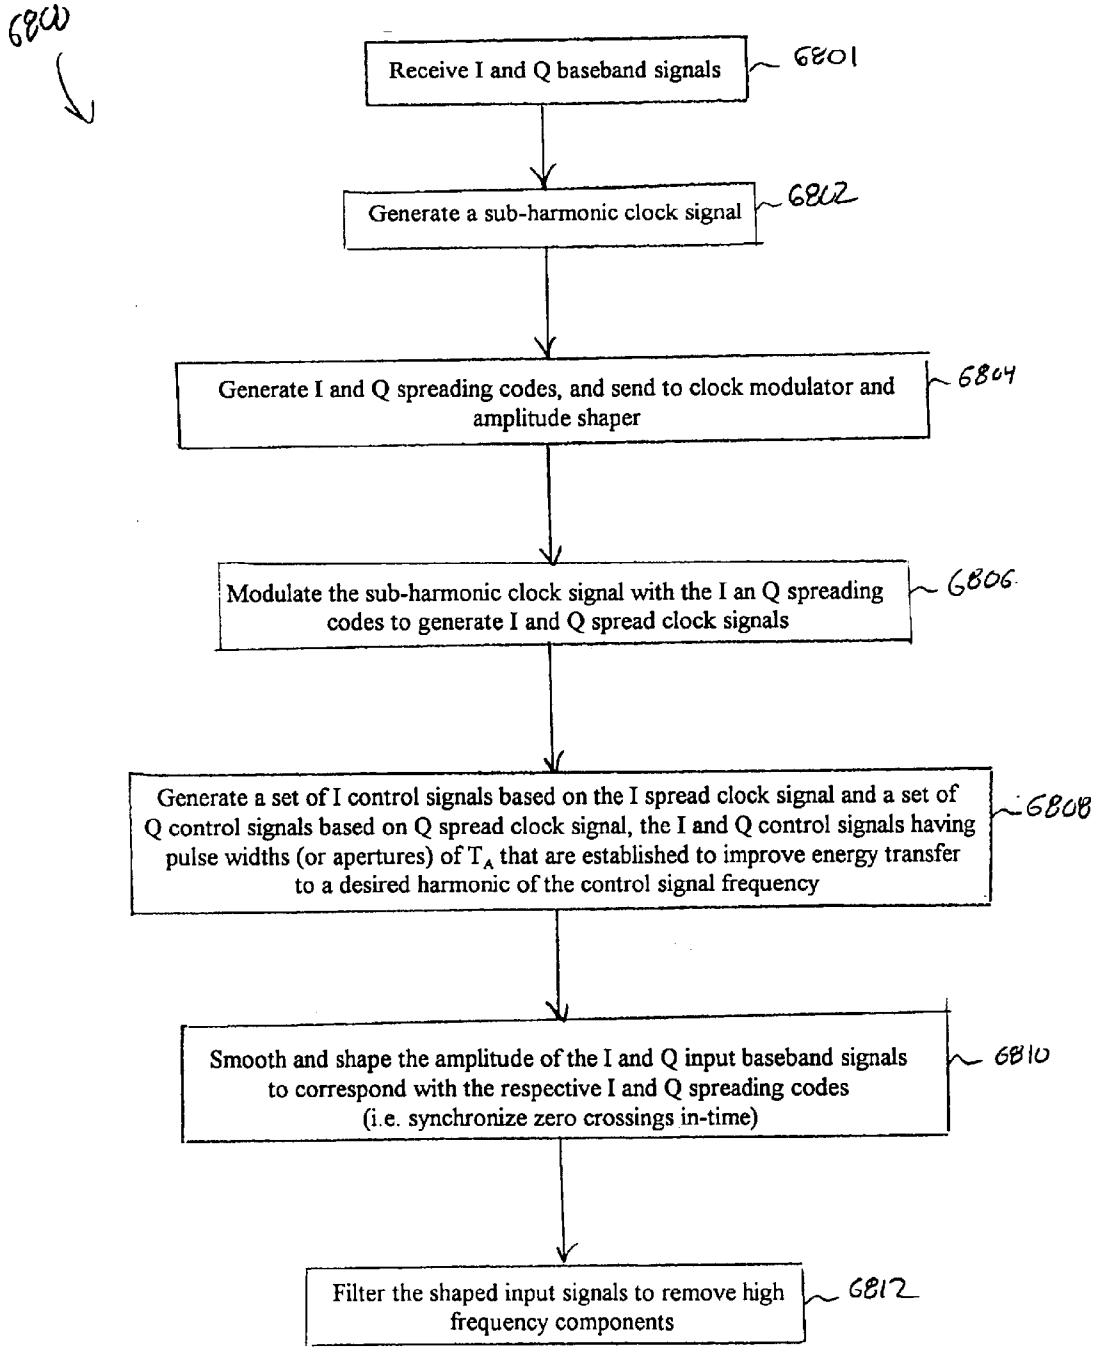

6800
Receive I and Q baseband signals
6801
Generate a sub-harmonic clock signal
6802
Generate I and Q spreading codes, and send to clock modulator and amplitude shaper
6804
Modulate the sub-harmonic clock signal with the I an Q spreading codes to generate I and Q spread clock signals
6806
Generate a set of I control signals based on the I spread clock signal and a set of Q control signals based on Q spread clock signal, the I and Q control signals having pulse widths (or apertures) of T_A that are established to improve energy transfer to a desired harmonic of the control signal frequency
6808
Smooth and shape the amplitude of the I and Q input baseband signals to correspond with the respective I and Q spreading codes (i.e. synchronize zero crossings in-time)
6810
Filter the shaped input signals to remove high frequency components
6812

FIG. 68A

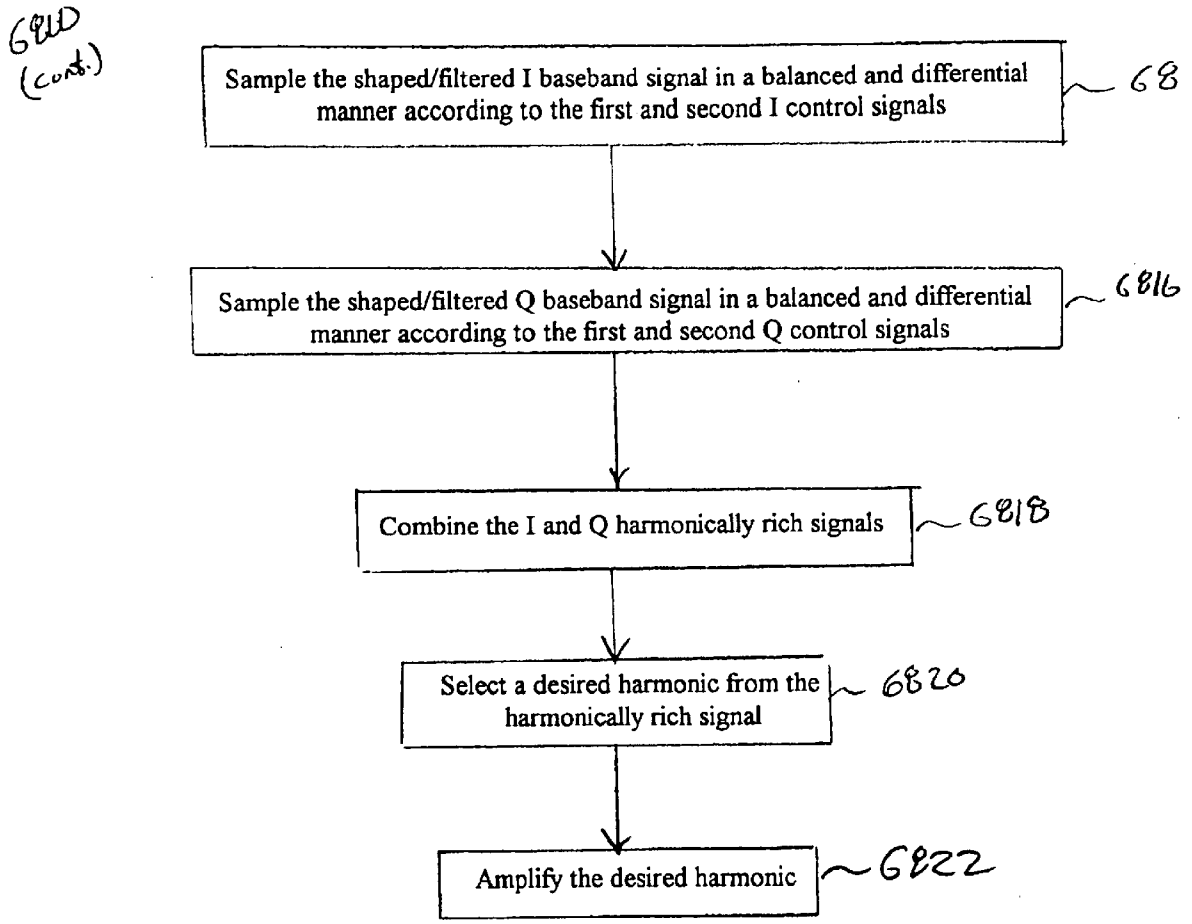

68D (cont.)
Sample the shaped/filtered I baseband signal in a balanced and differential manner according to the first and second I control signals
68
Sample the shaped/filtered Q baseband signal in a balanced and differential manner according to the first and second Q control signals
68I6
Combine the I and Q harmonically rich signals
68I8
Select a desired harmonic from the harmonically rich signal
6820
Amplify the desired harmonic
6822

FIG. 68B

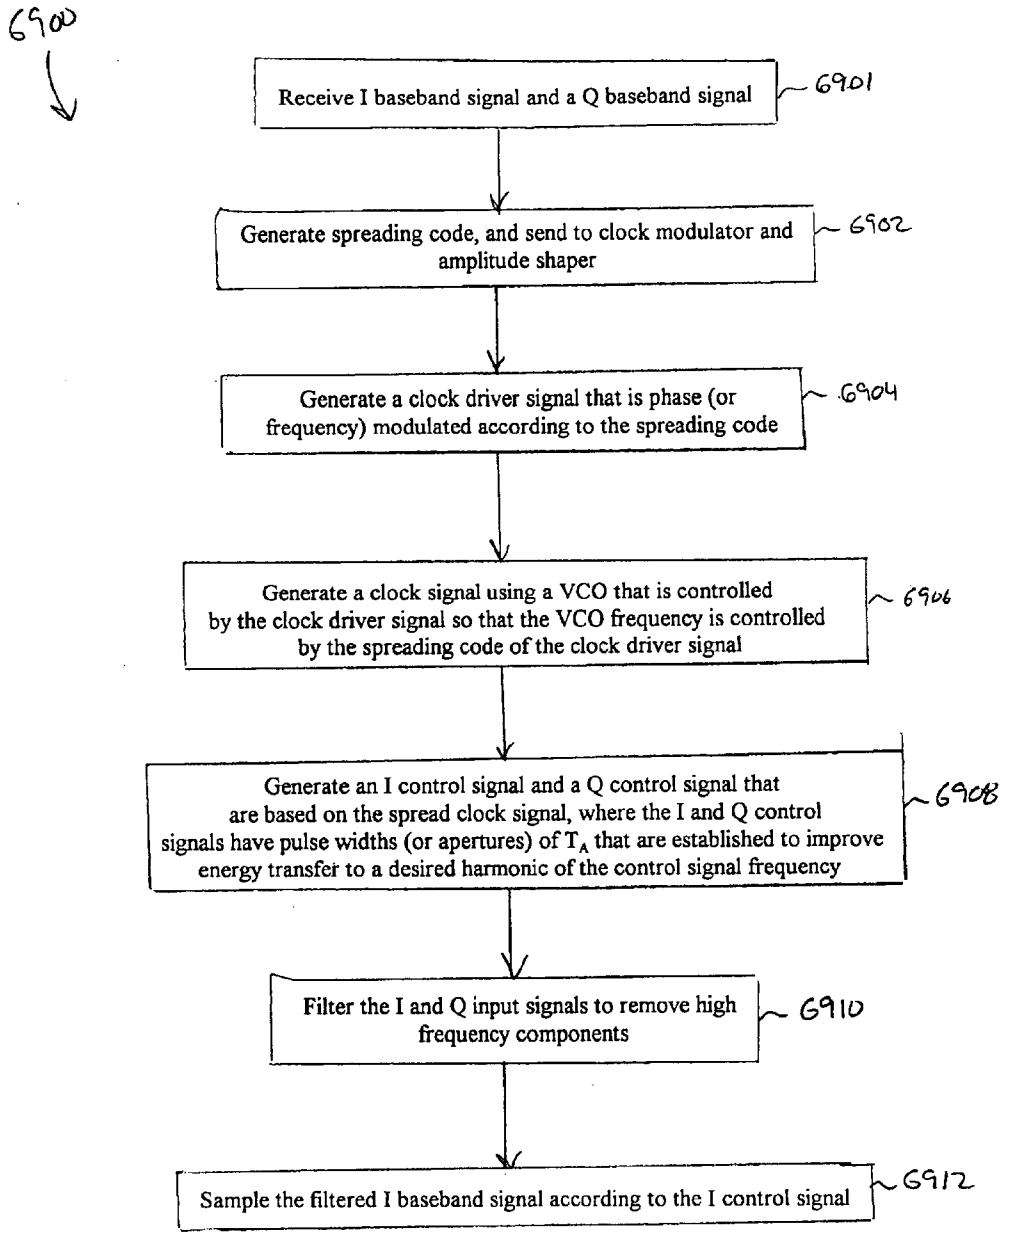

6900
Receive I baseband signal and a Q baseband signal
6901
Generate spreading code, and send to clock modulator and amplitude shaper
6902
Generate a clock driver signal that is phase (or frequency) modulated according to the spreading code
6904
Generate a clock signal using a VCO that is controlled by the clock driver signal so that the VCO frequency is controlled by the spreading code of the clock driver signal
6906
Generate an I control signal and a Q control signal that are based on the spread clock signal, where the I and Q control signals have pulse widths (or apertures) of T_A that are established to improve energy transfer to a desired harmonic of the control signal frequency
6908
Filter the I and Q input signals to remove high frequency components
6910
Sample the filtered I baseband signal according to the I control signal
6912

FIG. 69A

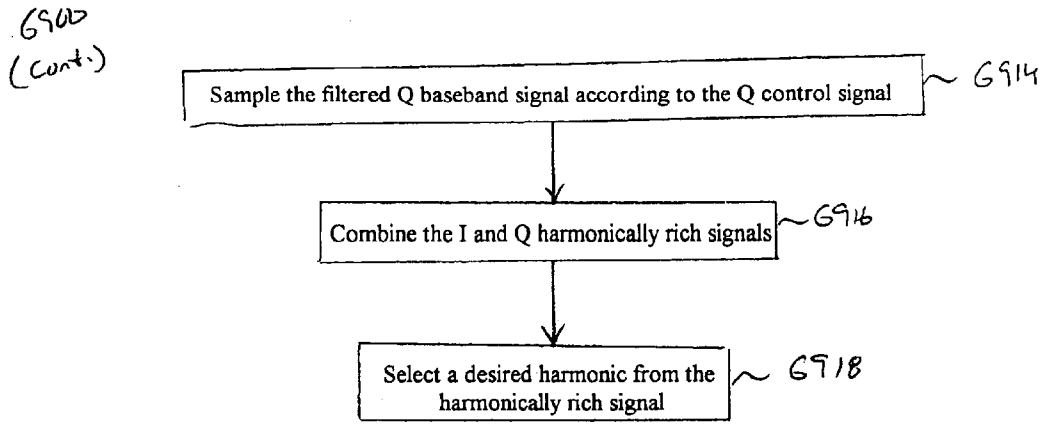

690
(cont.)
Sample the filtered Q baseband signal according to the Q control signal
6914
Combine the I and Q harmonically rich signals
6916
Select a desired harmonic from the harmonically rich signal
6918

FIG. 69B

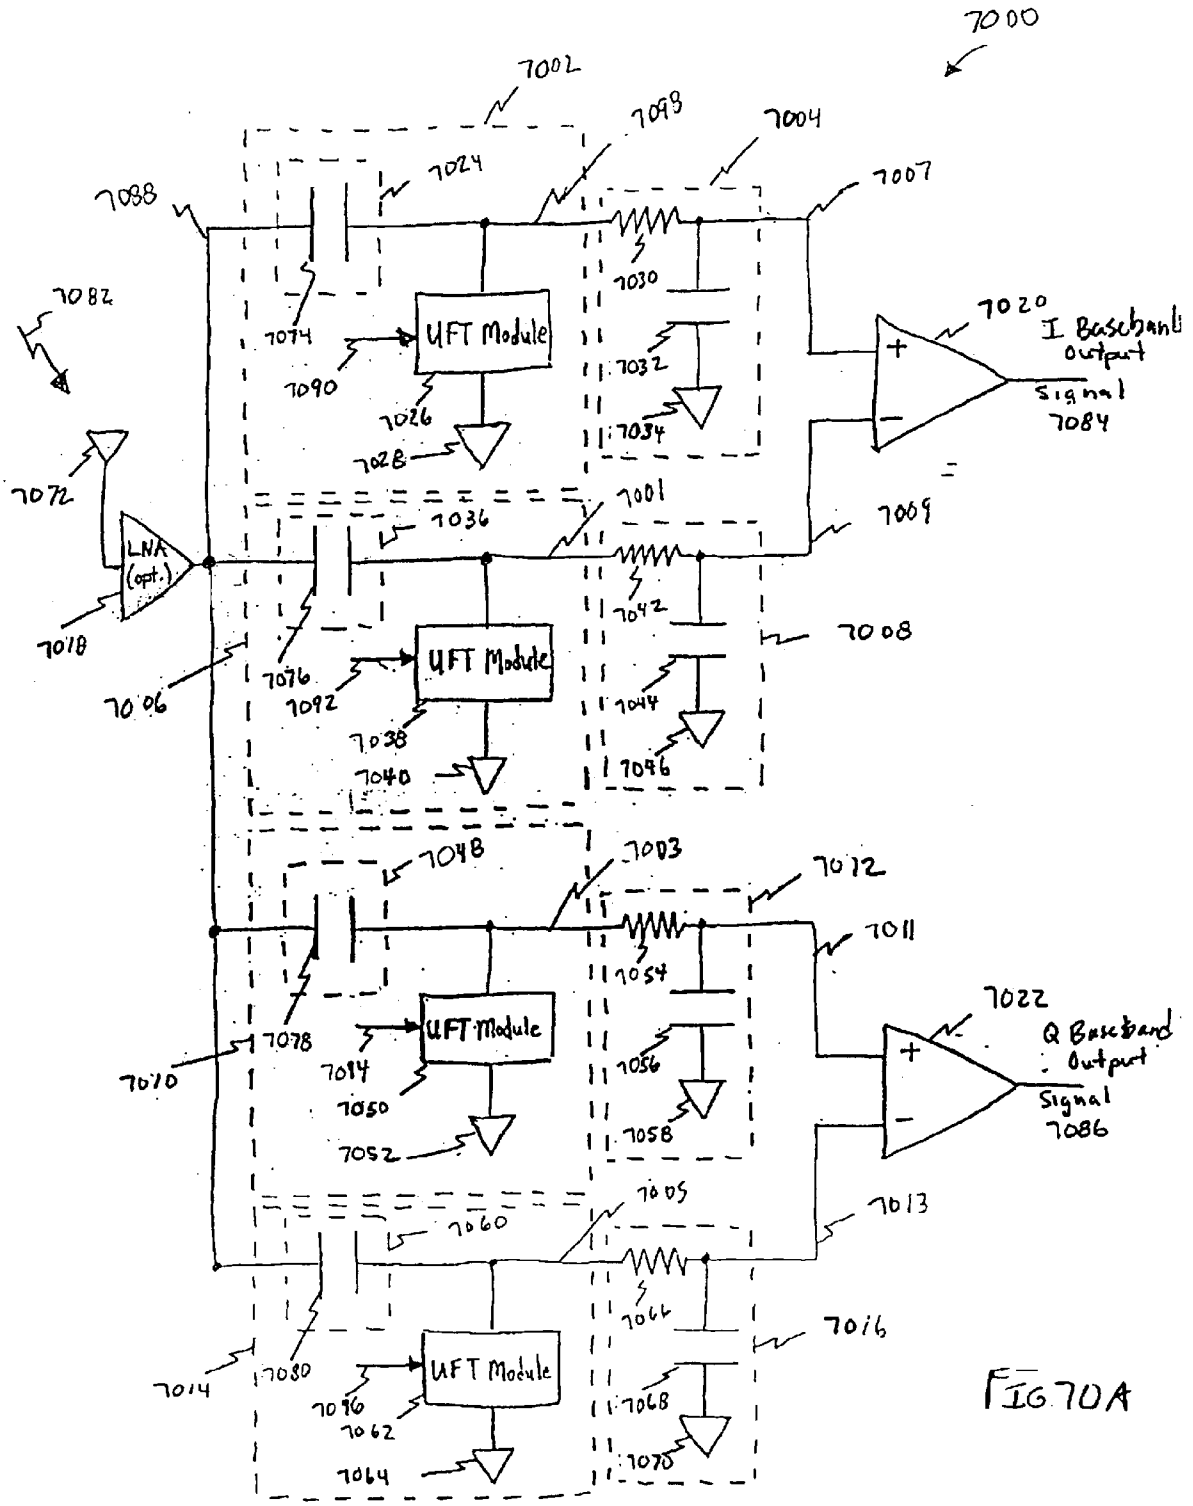

7000
7002
7098
7004
7007
7088
7024
7030
7082
7074
UFT Module
7090
7026
7032
7034
7028
7020
I Baseband Output Signal 7084
7072
7001
7009
7036
LNA (opt.)
7042
7018
7076
7092
7008
7006
7038
7044
7040
7096
7048
7003
7012
7011
7054
7078
7094
7022
Q Baseband Output Signal 7086
7070
7050
7056
7052
7058
7005
7013
7060
7066
7016
7080
7096
7062
7068
7014
7064
7070

FIG 70A

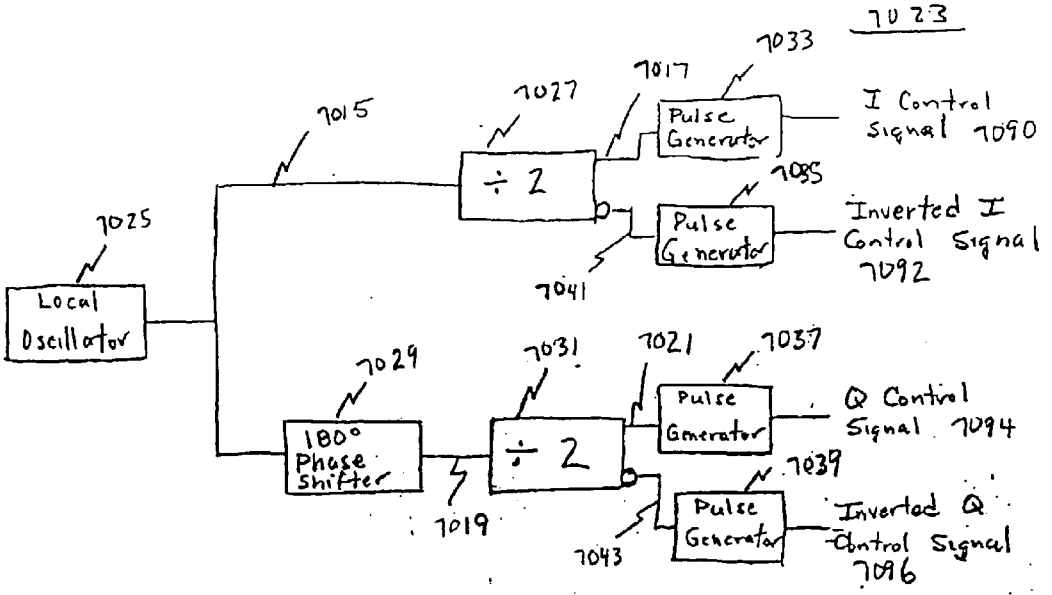


FIG. 70B

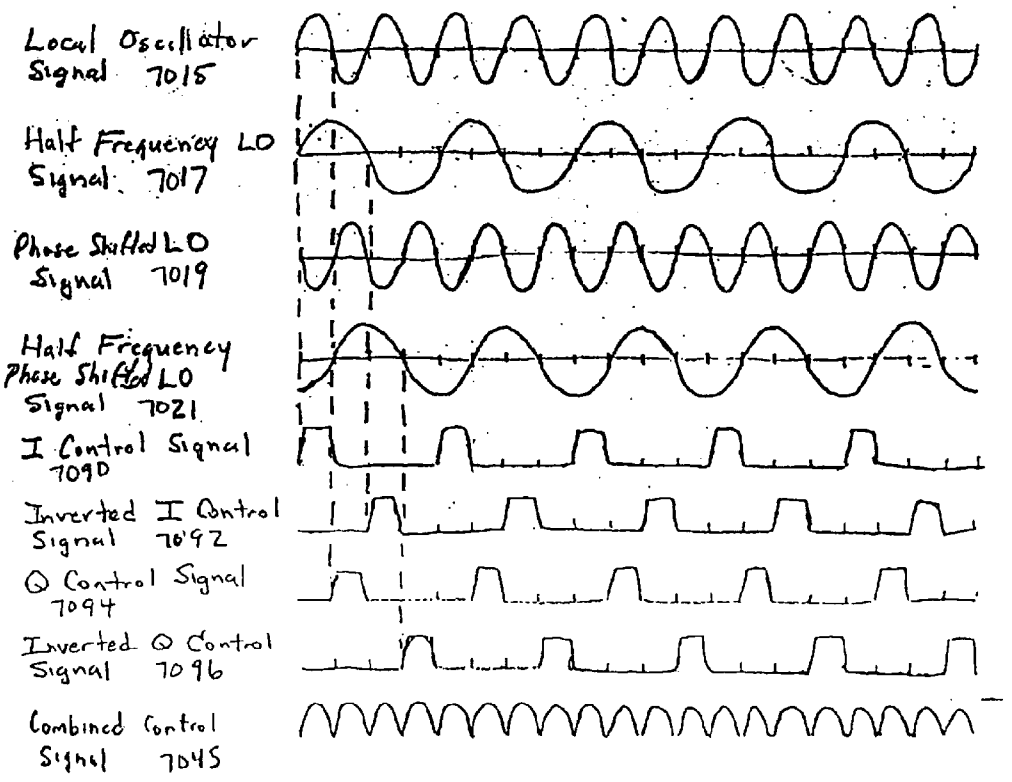


FIG. 70C

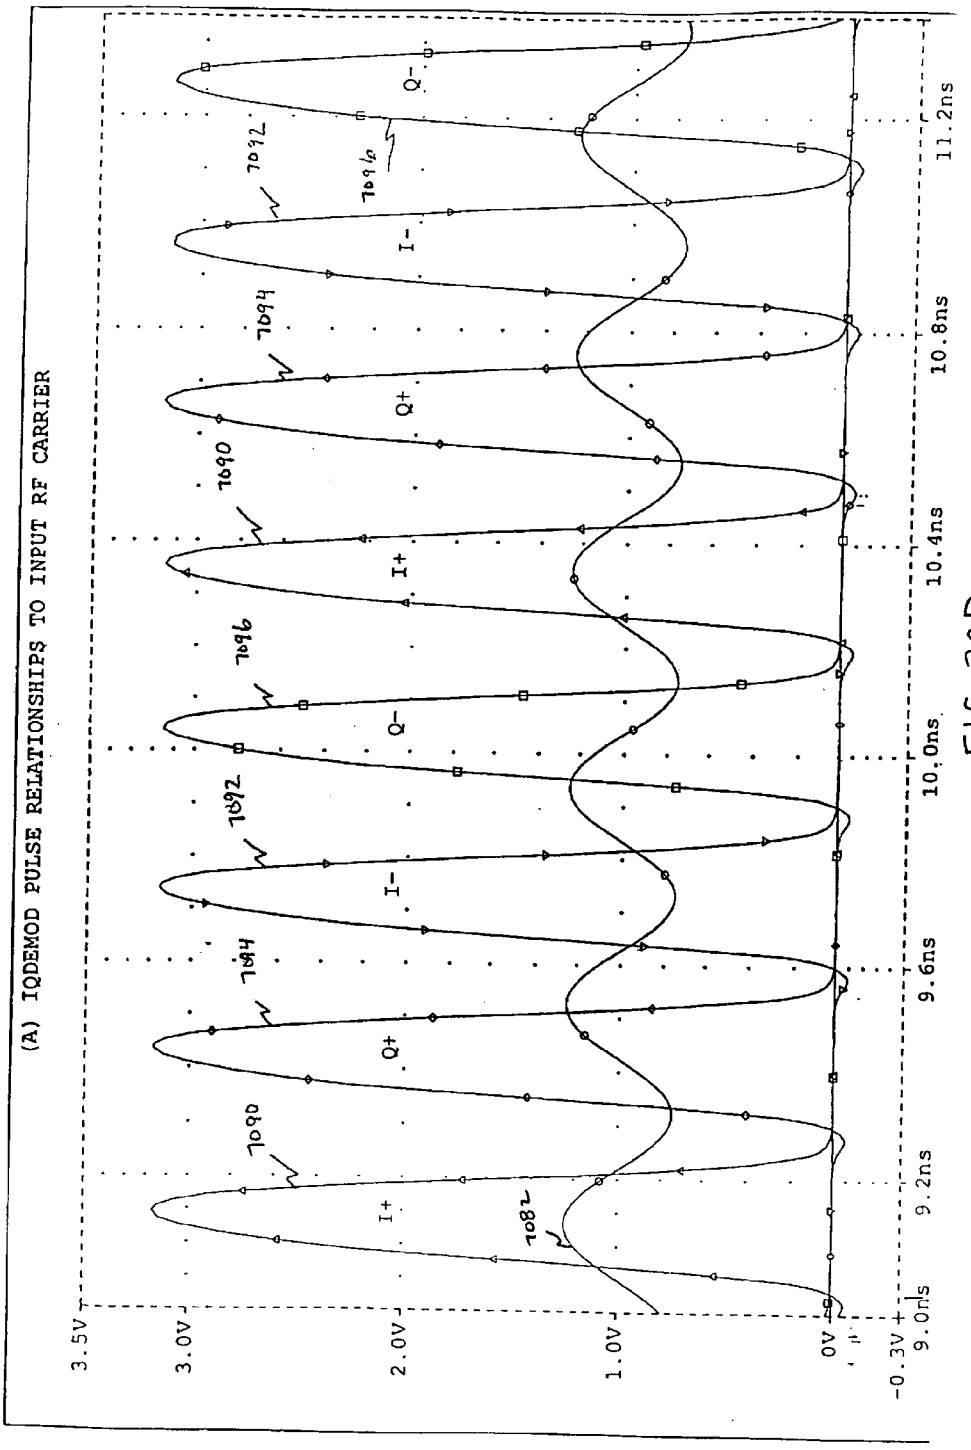

(A) IQDEMOD PULSE RELATIONSHIPS TO INPUT RF CARRIER
3.5V
3.0V
2.0V
1.0V
0V
-0.3V
9.0ns
9.2ns
9.6ns
10.0ns
10.4ns
10.8ns
11.2ns
7082
7090
I+
7084
Q+
7092
I-
7096
Q-
7090
I+
7094
Q+
7092
I-
7096
Q-

FIG. 70D

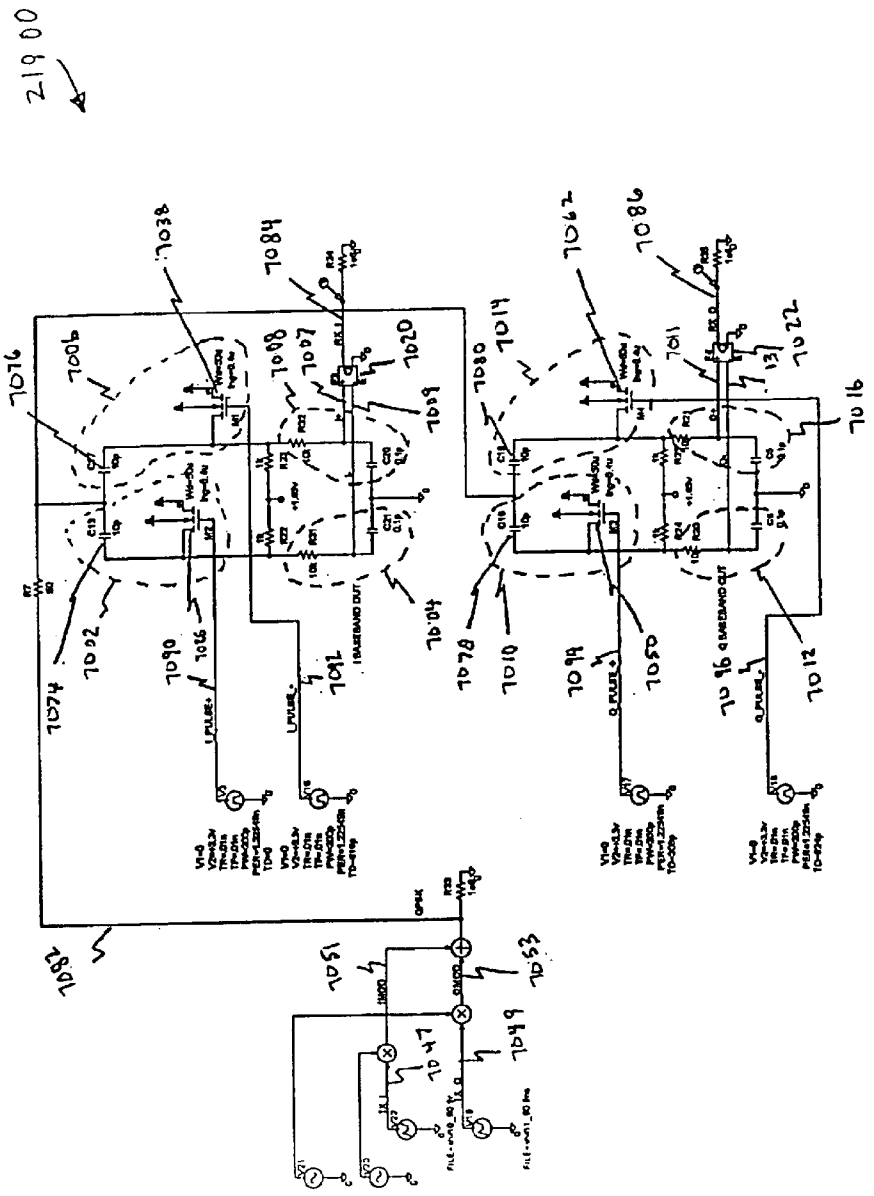

21900
7074
7076
7006
7038
7084
7086
7067
7014
7080
7018
7020
7009
7008
7007
7022
7016
7002
7090
7096
7091
7078
7010
7099
7050
7096
7012
7094
7082
7051
7053
7049
7047

FIG. 70E

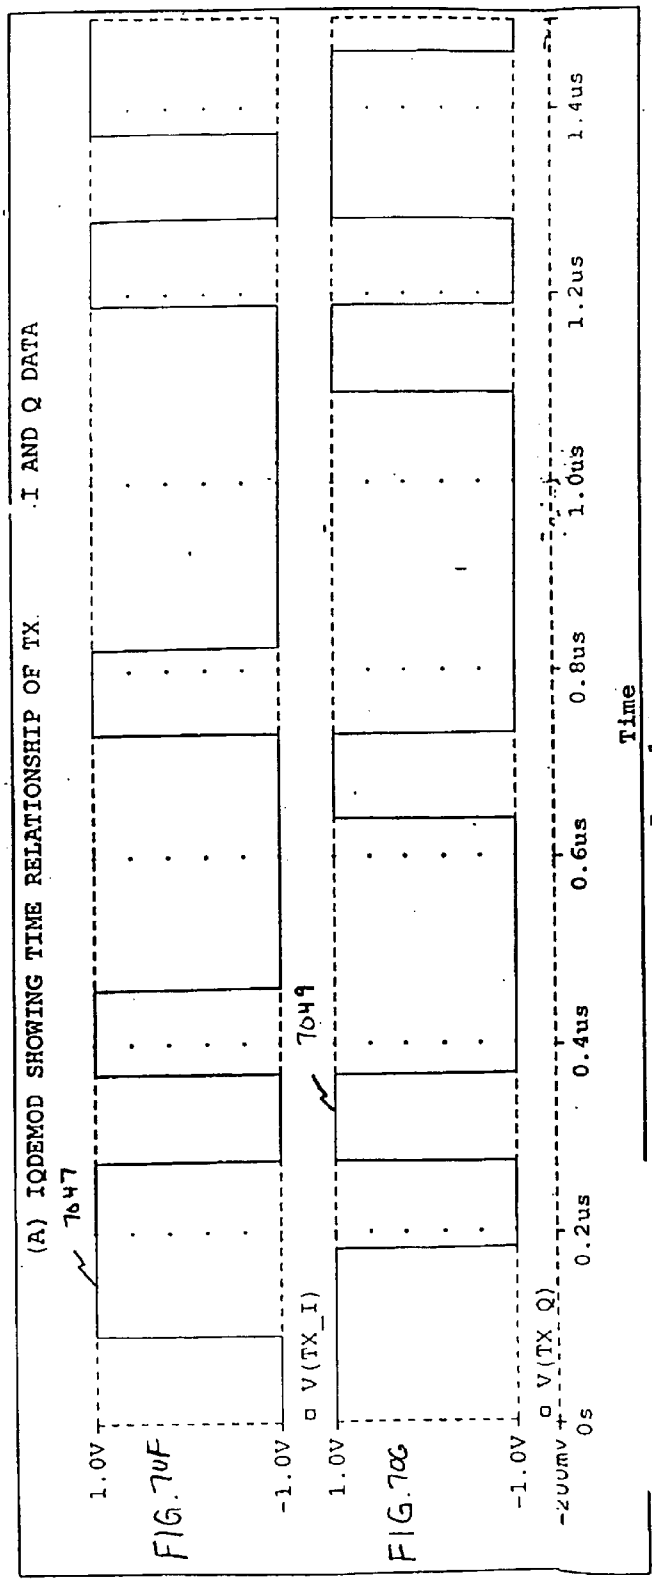
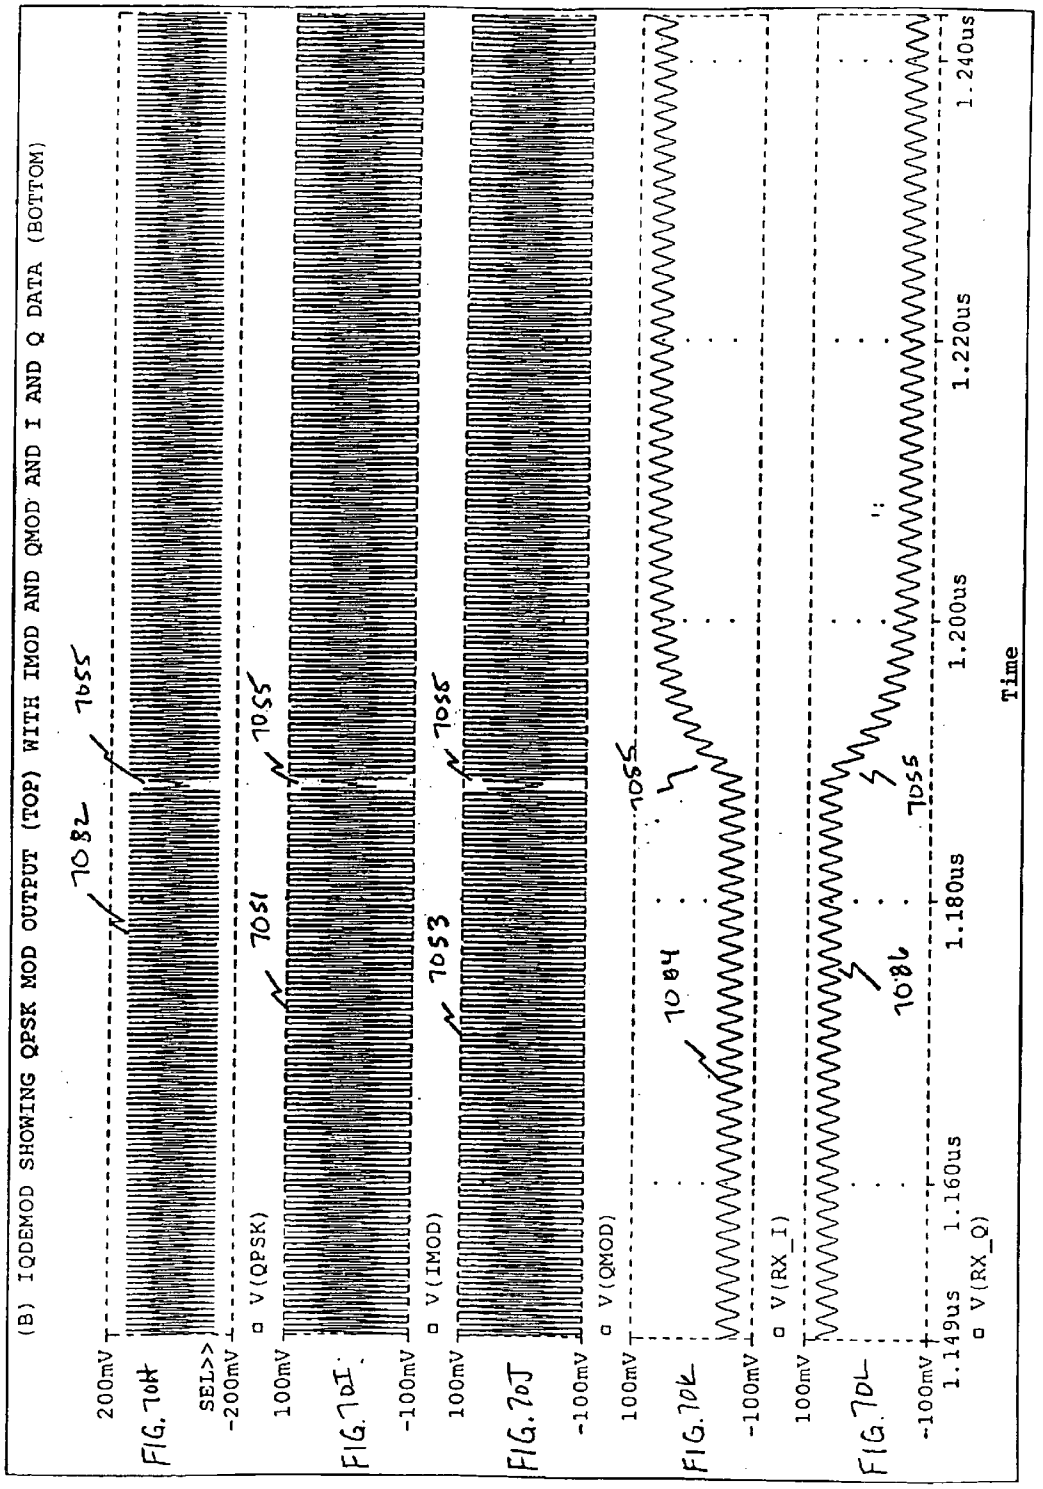
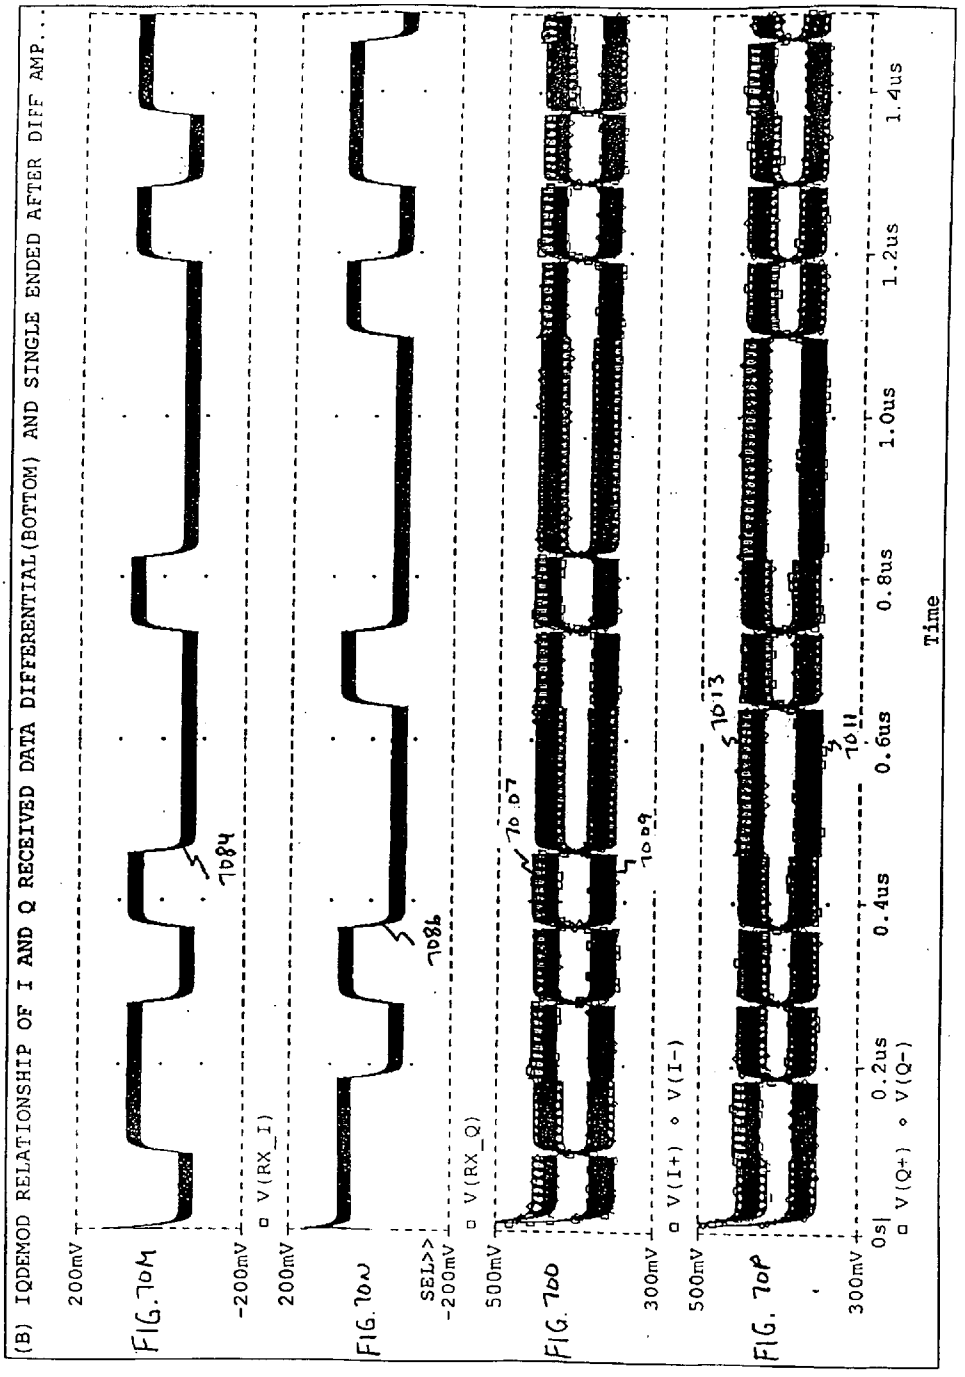


FIG. 7uF

FIG. 7ag


(B) IQDEMOD SHOWING QPSK MOD OUTPUT (TOP) WITH IMOD AND QMOD AND I AND Q DATA (BOTTOM)
200mV
SEL>>
-200mV
V(QPSK)
100mV
-100mV
V(IMOD)
100mV
-100mV
V(QMOD)
100mV
-100mV
V(RX_I)
100mV
-100mV
V(RX_Q)
1.149us
1.160us
1.180us
1.200us
1.220us
1.240us
Time
7082
7055
7051
7055
7053
7058
7055
7084
7086
7055
FIG. 7oH
FIG. 7oI
FIG. 7oJ
FIG. 7oK
FIG. 7oL


(B) IQDEMOD RELATIONSHIP OF I AND Q RECEIVED DATA DIFFERENTIAL(BOTTOM) AND SINGLE ENDED AFTER DIFF AMP.
200mV
-200mV
V(RX_I)
FIG. 70M
7084
200mV
SEL>>
-200mV
V(RX_Q)
FIG. 70J
7086
500mV
300mV
V(I+) V(I-)
FIG. 70D
7087
7089
500mV
300mV
V(Q+) V(Q-)
FIG. 70P
7013
7011
0s
0.2us
0.4us
0.6us
0.8us
1.0us
1.2us
1.4us
Time

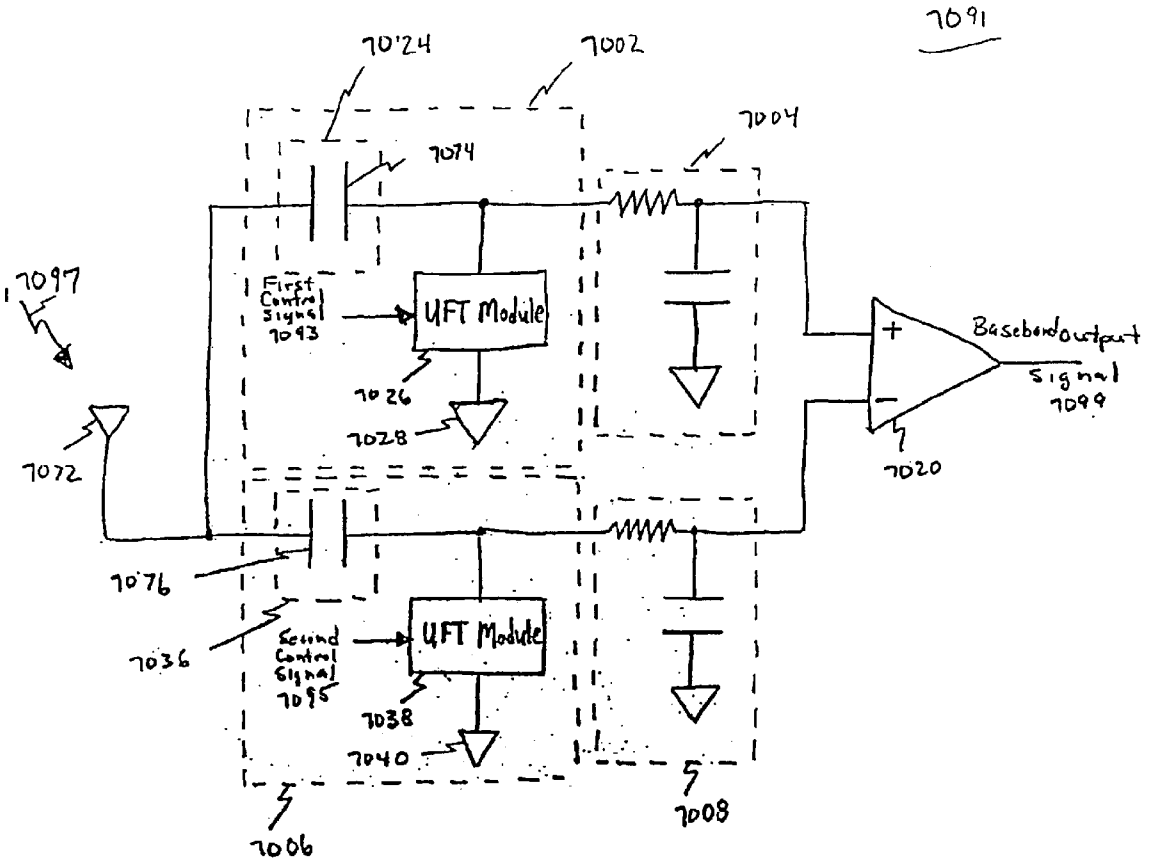

7091
7024
7002
7004
7074
7097
First Control Signal 7093
UFT Module
7026
7028
7072
Baseband output signal 7099
7020
7076
7036
Second Control Signal 7095
UFT Module
7038
7040
7006
7008

FIG. 70Q

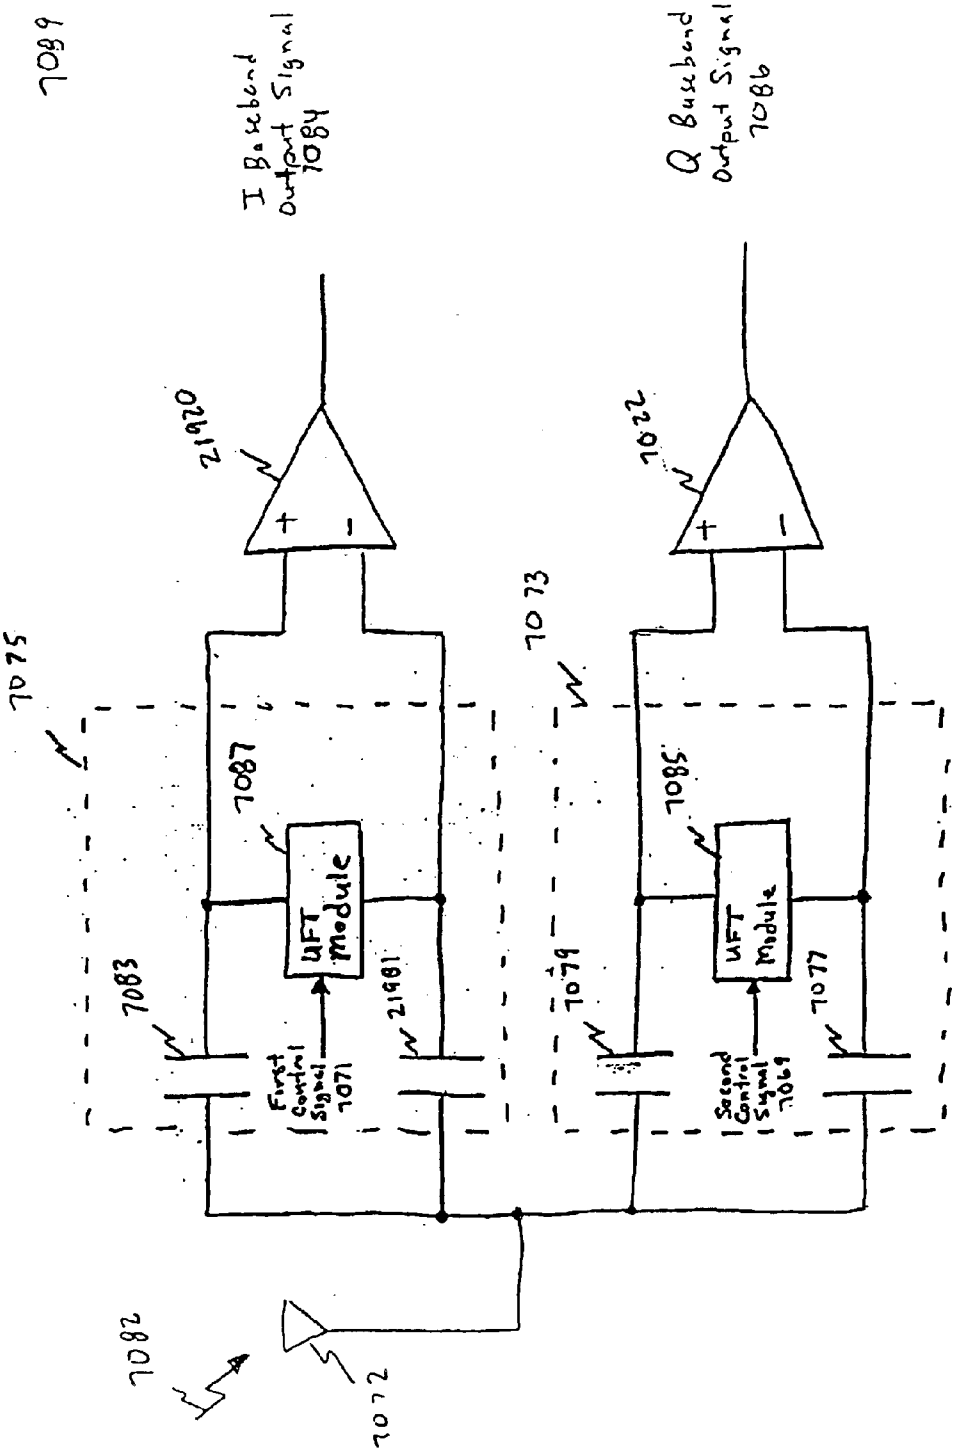

7089
I Baseband Output Signal 7084
Q Baseband Output Signal 7086
21920
7022
7075
7073
7087
7085
UFT Module
UFT Module
7083
21981
7079
7077
First Control Signal 7071
Second Control Signal 7069
7082
7072

FIG. 70 R

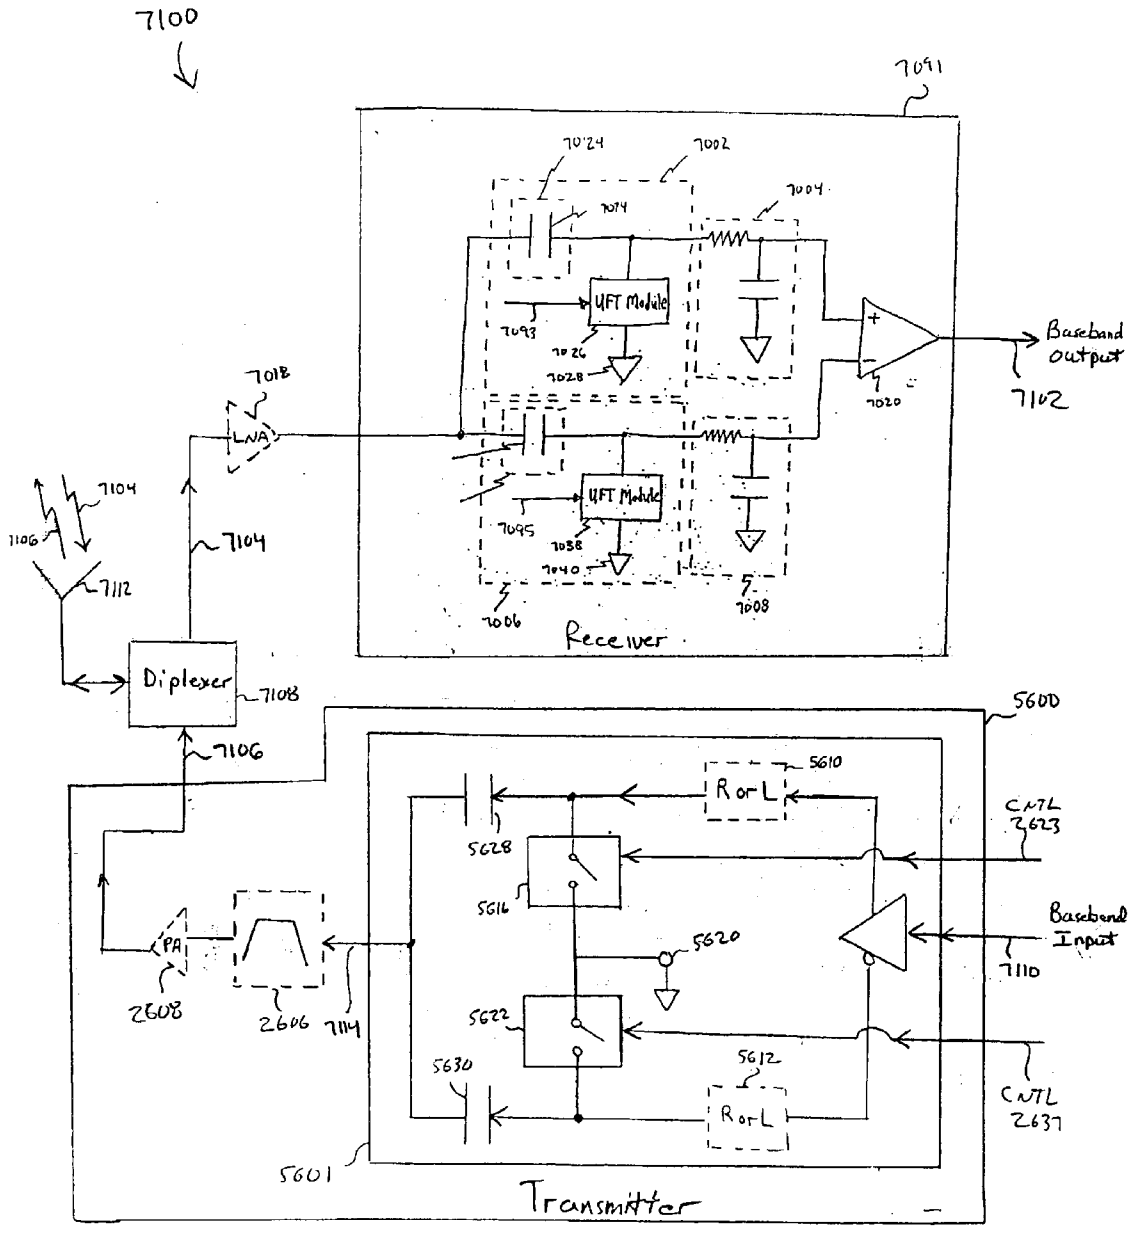


FIG. 71 : Transceiver

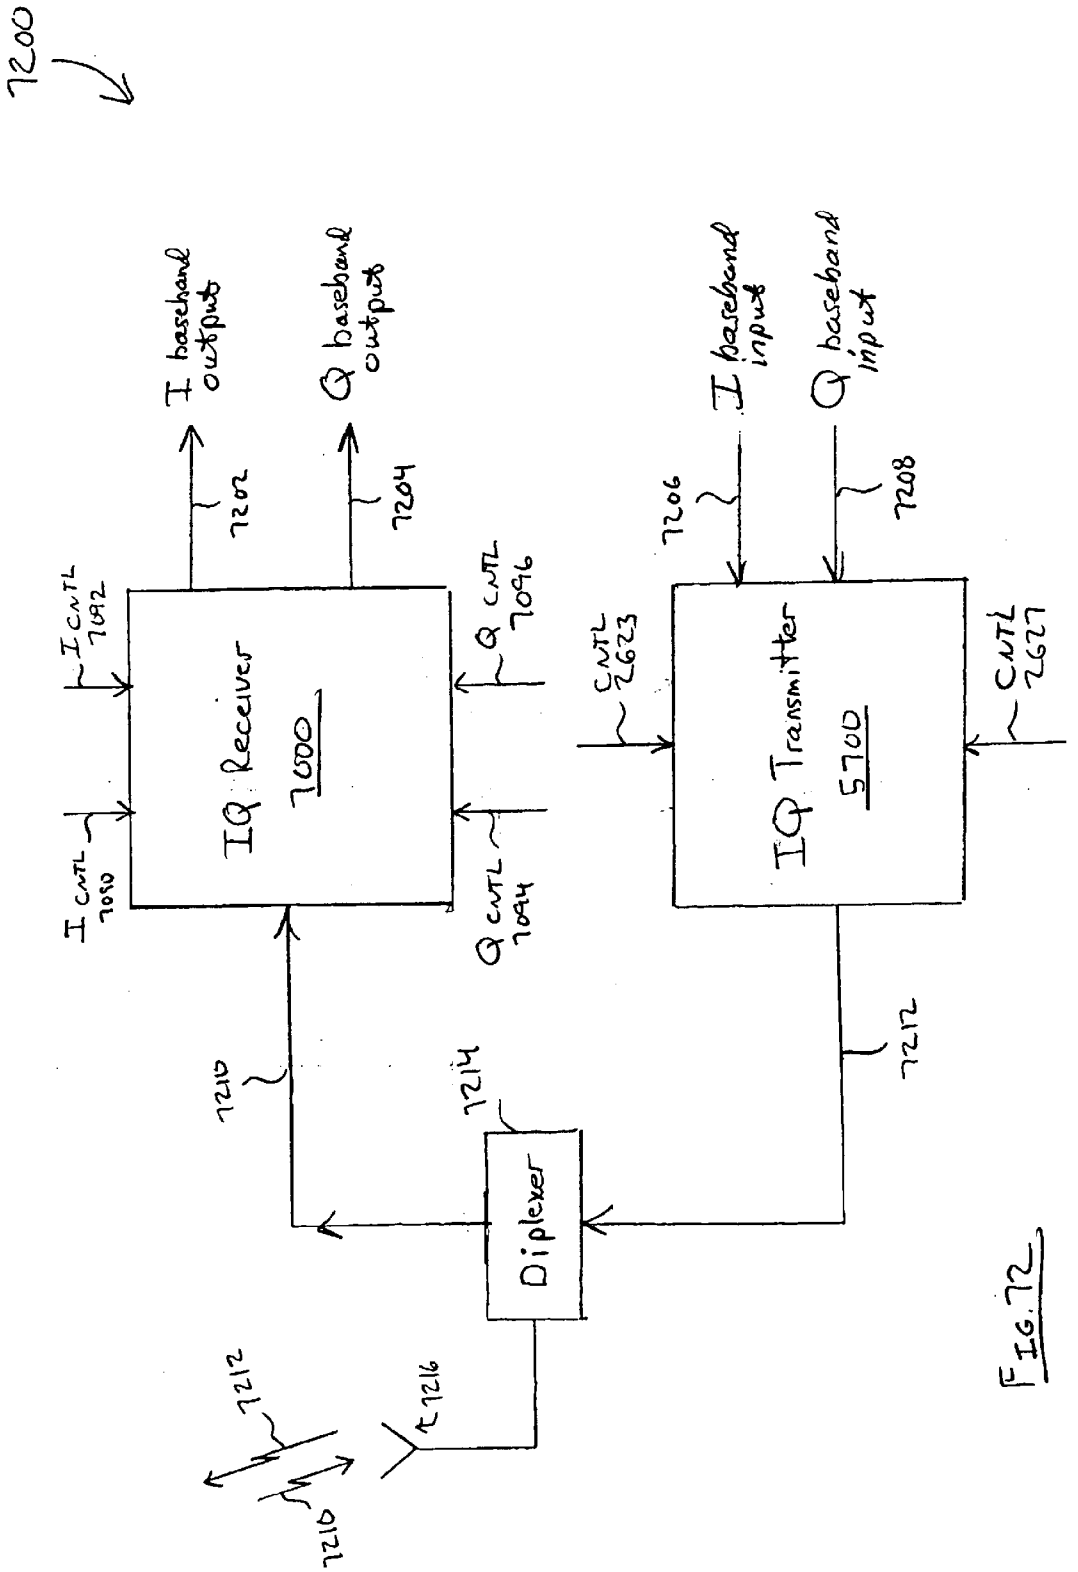

7200
I baseband outputs
Q baseband outputs
7202
7204
I CNTL 7092
Q CNTL 7096
IQ Receiver 7000
I CNTL 7010
Q CNTL 7094
7206
7208
I baseband input
Q baseband input
CNTL 2623
CNTL 2627
IQ Transmitter 5700
7210
7212
7214
Diplexer
7216
7212
7210

FIG. 72

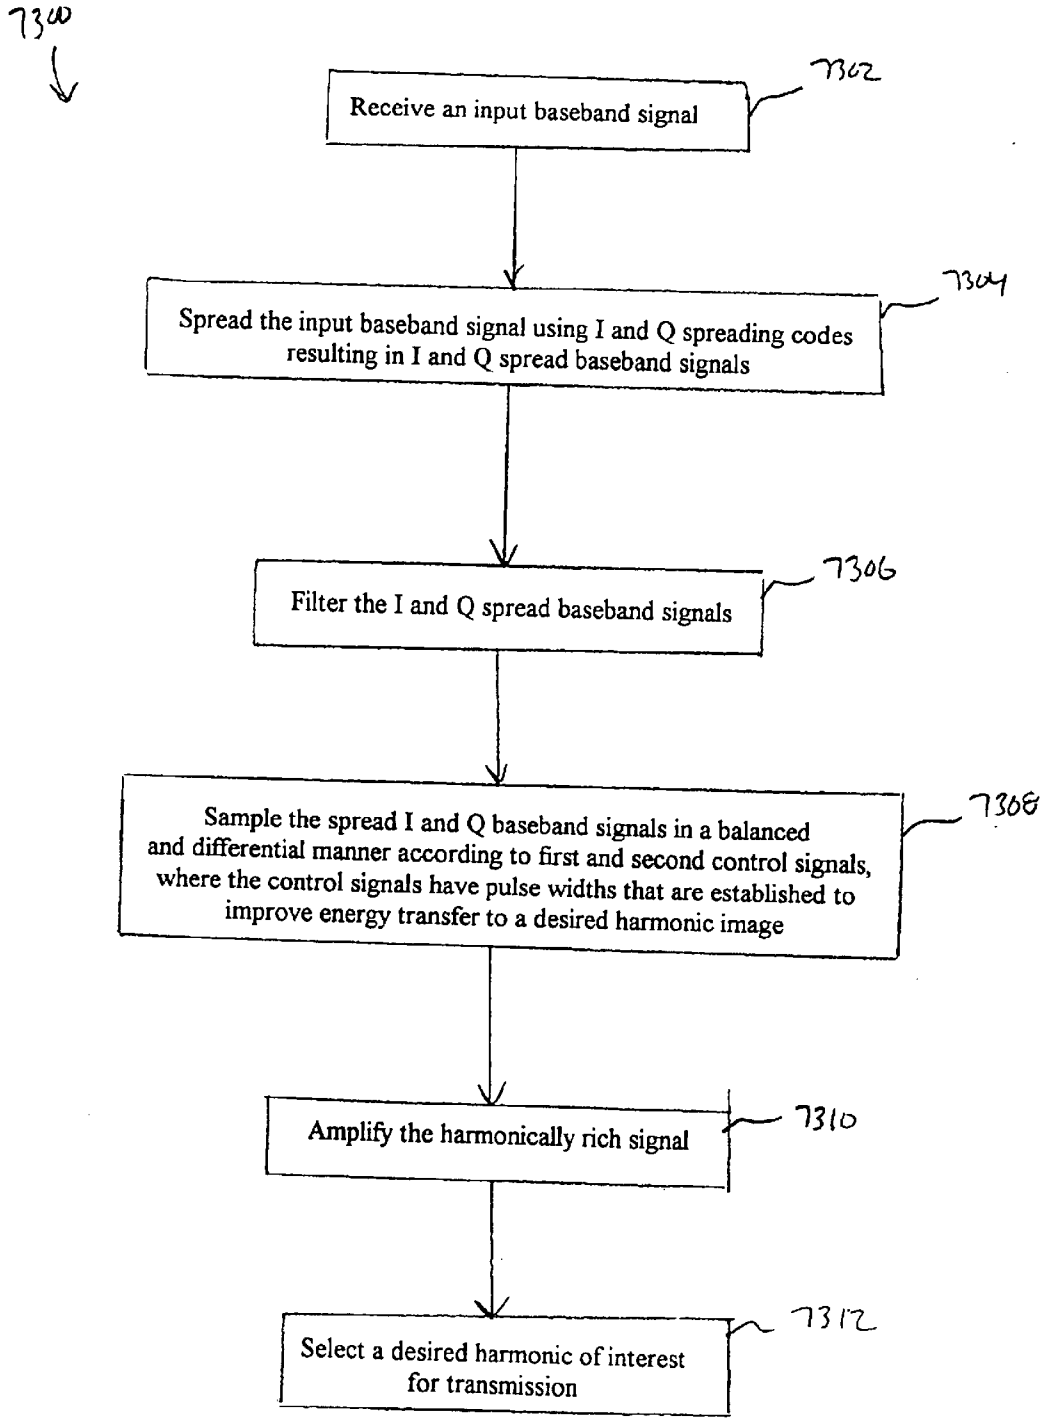

7300
Receive an input baseband signal
7302
Spread the input baseband signal using I and Q spreading codes resulting in I and Q spread baseband signals
7304
Filter the I and Q spread baseband signals
7306
Sample the spread I and Q baseband signals in a balanced and differential manner according to first and second control signals, where the control signals have pulse widths that are established to improve energy transfer to a desired harmonic image
7308
Amplify the harmonically rich signal
7310
Select a desired harmonic of interest for transmission
7312

FIG. 73

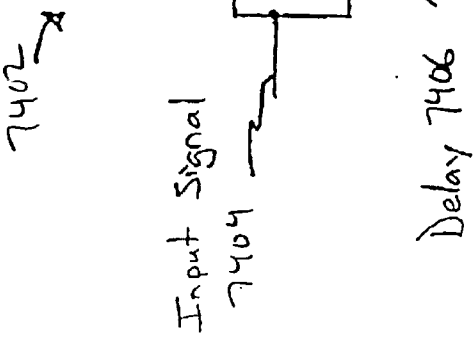


FIG. 74A


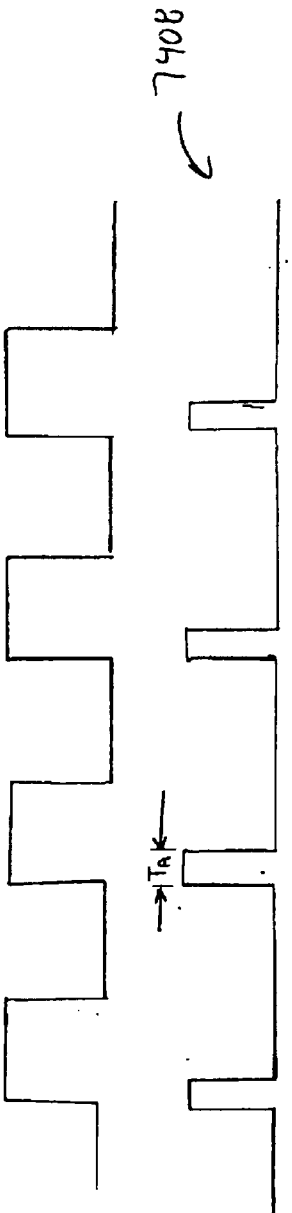



FIG. 74B

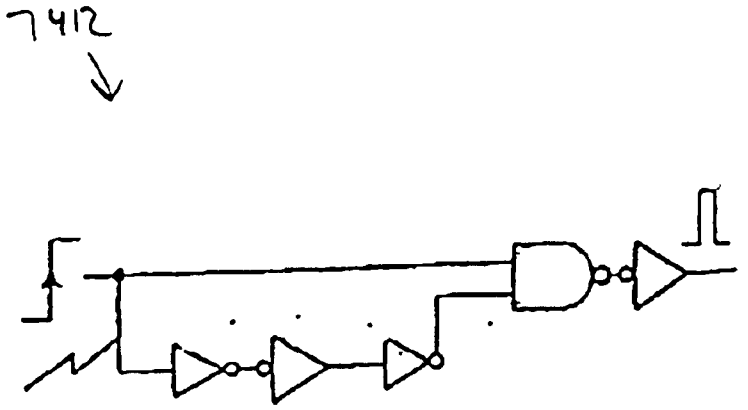FIG. 74C



A. rising edge pulse generator

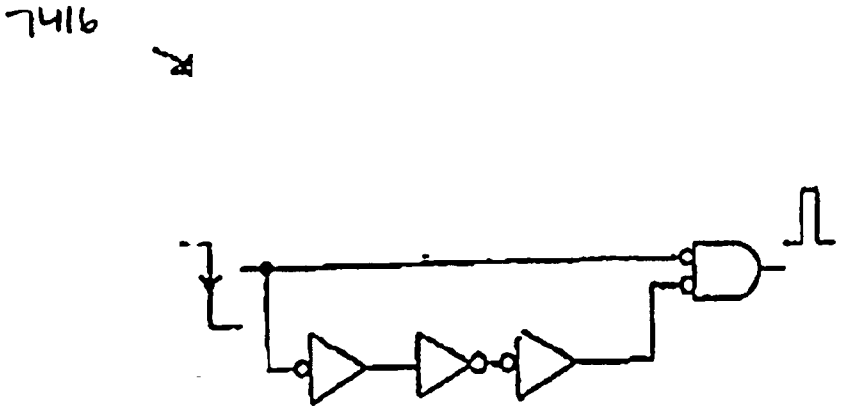FIG. 74D



B. falling-edge pulse generator

FIG. 74E

METHOD, SYSTEM AND APPARATUS FOR BALANCED FREQUENCY UP-CONVERSION OF A BASEBAND SIGNAL AND 4-PHASE RECEIVER AND TRANSCEIVER EMBODIMENTS

This application claims priority to the following: U.S. Provisional Application No. 60/177,381, filed on Jan. 24, 2000; U.S. Provisional Application No. 60/171,502, filed Dec. 22, 1999; U.S. Provisional Application No. 60/177,705, filed on Jan. 24, 2000; U.S. Provisional Application No. 60/129,839, filed on Apr. 16, 1999; U.S. Provisional Application No. 60/158,047, filed on Oct. 7, 1999, U.S. Provisional Application No. 60/171,349, filed on Dec. 21, 1999; U.S. Provisional Application No. 60/177,702, filed on Jan. 24, 2000; U.S. Provisional Application No. 60/180,667, filed on Feb. 7, 2000; and U.S. Provisional Application No. 60/171,496, filed on Dec. 22, 1999; all of which are incorporated by reference herein in their entireties.

CROSS-REFERENCE TO OTHER APPLICATIONS

The following applications of common assignee are related to the present application, and are herein incorporated by reference in their entireties:

"Method and System for Down-Converting Electromagnetic Signals," Ser. No. 09/176,022, filed Oct. 21, 1998;

"Method and System for Frequency Up-Conversion," Ser. No. 09/176,154, filed Oct. 21, 1998;

"Method and System for Ensuring Reception of a Communications Signal," Ser. No. 09/176,415, filed Oct. 21, 1998;

"Integrated Frequency Translation And Selectivity," Ser. No. 09/175,966, filed Oct. 21, 1998;

"Universal Frequency Translation, and Applications of Same," Ser. No. 09/176,027, filed Oct. 21, 1998;

"Applications of Universal Frequency Translation," filed Mar. 3, 1999, Ser. No. 09/261,129, filed Mar. 3, 1999;

"Matched Filter Characterization and Implementation of Universal Frequency Translation Method and Apparatus," Ser. No. 09/521,878, filed Mar. 9, 1999;

"Spread Spectrum Applications of Universal Frequency Translation," Ser. No. 09/525,185; and

"DC Offset, Re-radiation, and I/Q Solutions Using Universal Frequency Translation Technology," Ser. No. 09/526,041.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention is generally related to frequency up-conversion of a baseband signal, and applications of same. The invention is also directed to embodiments for frequency down-conversion, and to transceivers.

2. Related Art

Various communication components and systems exist for performing frequency up-conversion and down-conversion of electromagnetic signals.

SUMMARY OF THE INVENTION

The present invention is related to up-converting a baseband signal, and applications of same. Such applications include, but are not limited to, up-converting a spread spectrum signal directly from baseband to radio frequency (RF) without utilizing any intermediate frequency (IF) processing. The invention is also related to frequency down-conversion.

In embodiments, the invention differentially samples a baseband signal according to first and second control signals, resulting in a harmonically rich signal. The harmonically rich signal contains multiple harmonic images that each contain the necessary amplitude, frequency, and/or phase information to reconstruct the baseband signal. The harmonic images in the harmonically rich signal repeat at the harmonics of the sampling frequency ($1/T_S$) that are associated with the first and second control signals. In other words, the sampling is performed sub-harmonically according to the control signals. Additionally, the control signals include pulses that have an associated pulse width T_A that is established to improve energy transfer to a desired harmonic image in the harmonically rich signal. The desired harmonic image can optionally be selected using a bandpass filter for transmission over a communications medium.

In operation, the invention converts the input baseband signal from a (single-ended) input into a differential baseband signal having first and second components. The first differential component is substantially similar to the input baseband signal, and the second differential component is an inverted version of the input baseband signal. The first differential component is sampled according to the first control signal, resulting in a first harmonically rich signal. Likewise, the second differential component is sampled according to the second control signal, resulting in a second harmonically rich signal. The first and second harmonically rich signals are combined to generate the output harmonically rich signal.

The sampling modules that perform the differentially sampling can be configured in a series or shunt configuration. In the series configuration, the baseband input is received at one port of the sampling module, and is gated to a second port of the sampling module, to generate the harmonically rich signal at the second port of the sampling module. In the shunt configuration, the baseband input is received at one port of the sampling module and is periodically shunted to ground at the second port of the sampling module, according to the control signal. Therefore, in the shunt configuration, the harmonically rich signal is generated at the first port of the sampling module and coexists with the baseband input signal at the first port.

The first control signal and second control signals that control the sampling process are phase shifted relative to one another. In embodiments of the invention, the phase-shift is 180 degree in reference to a master clock signal, although the invention includes other phase shift values. Therefore, the sampling modules alternately sample the differential components of the baseband signal. Additionally as mentioned above, the first and second control signals include pulses having a pulse width T_A that is established to improve energy transfer to a desired harmonic in the harmonically rich signal during the sampling process. More specifically, the pulse width T_A is a non-negligible fraction of a period associated with a desired harmonic of interest. In an embodiment, the pulse width T_A is one-half of a period of the harmonic of interest. Additionally, in an embodiment, the frequency of the pulses in both the first and second control signal are a sub-harmonic frequency of the output signal.

In further embodiments, the invention minimizes DC offset voltages between the sampling modules during the differential sampling. In the serial configuration, this is accomplished by distributing a reference voltage to the input

and output of the sampling modules. The result of minimizing (or preventing) DC offset voltages is that carrier insertion is minimized in the harmonics of the harmonically rich signal. In many transmit applications, carrier insertion is undesirable because the information to be transmitted is carried in the sidebands, and any energy at the carrier frequency is wasted. Alternatively, some transmit applications require sufficient carrier insertion for coherent demodulation of the transmitted signal at the receiver. In these applications, the invention can be configured to generate offset voltages between sampling modules, thereby causing carrier insertion in the harmonics of the harmonically rich signal.

An advantage is that embodiments of the invention up-convert a baseband signal directly from baseband-to-RF without any IF processing, while still meeting the spectral growth requirements of the most demanding communications standards. (Other embodiments may employ if processing.) For example, in an I Q configuration, the invention can up-convert a CDMA spread spectrum signal directly from baseband-to-RF, and still meet the CDMA IS-95 figure-of-merit and spectral growth requirements. In other words, the invention is sufficiently linear and efficient during the up-conversion process that no IF filtering or amplification is required to meet the IS-95 figure-of-merit and spectral growth requirements. As a result, the entire IF chain in a conventional CDMA transmitter configuration can be eliminated, including the expensive and hard to integrate SAW filter. Since the SAW filter is eliminated, substantial portions of a CDMA transmitter that incorporate the invention can be integrated onto a single CMOS chip that uses a standard CMOS process, although the invention is not limited to this example application.

Further features and advantages of the invention, as well as the structure and operation of various embodiments of the invention, are described in detail below with reference to the accompanying drawings. The drawing in which an element first appears is typically indicated by the leftmost character (s) and/or digit(s) in the corresponding reference number.

BRIEF DESCRIPTION OF THE FIGURES

The present invention will be described with reference to the accompanying drawings, wherein:

FIG. **1A** is a block diagram of a universal frequency translation (UFT) module according to an embodiment of the invention;

FIG. **1B** is a more detailed diagram of a universal frequency translation (UFT) module according to an embodiment of the invention;

FIG. **1C** illustrates a UFT module used in a universal frequency down-conversion (UFD) module according to an embodiment of the invention;

FIG. **1D** illustrates a UFT module used in a universal frequency up-conversion (UFU) module according to an embodiment of the invention;

FIG. **2A** is a block diagram of a universal frequency translation (UFT) module according to embodiments of the invention;

FIG. **2B** is a block diagram of a universal frequency translation (UFT) module according to embodiments of the invention,

FIG. **3** is a block diagram of a universal frequency up-conversion (UFU) module according to an embodiment of the invention;

FIG. **4** is a more detailed diagram of a universal frequency up-conversion (UFU) module according to an embodiment of the invention;

FIG. **5** is a block diagram of a universal frequency up-conversion (UFU) module according to an alternative embodiment of the invention;

FIGS. **6A–6I** illustrate example waveforms used to describe the operation of the UFU module;

FIG. **7** illustrates a UFT module used in a receiver according to an embodiment of the invention;

FIG. **8** illustrates a UFT module used in a transmitter according to an embodiment of the invention;

FIG. **9** illustrates an environment comprising a transmitter and a receiver, each of which may be implemented using a UFT module of the invention;

FIG. **10** illustrates a transceiver according to an embodiment of the invention;

FIG. **11** illustrates a transceiver according to an alternative embodiment of the invention;

FIG. **12** illustrates an environment comprising a transmitter and a receiver, each of which may be implemented using enhanced signal reception (ESR) components of the invention;

FIG. **13** illustrates a UFT module used in a unified down-conversion and filtering (UDF) module according to an embodiment of the invention;

FIG. **14** illustrates an example receiver implemented using a UDF module according to an embodiment of the invention,

FIGS. **15A–15F** illustrate example applications of the UDF module according to embodiments of the invention;

FIG. **16** illustrates an environment comprising a transmitter and a receiver, each of which may be implemented using enhanced signal reception (ESR) components of the invention, wherein the receiver may be further implemented using one or more UFD modules of the invention;

FIG. **17** illustrates a unified down-converting and filtering (UDF) module according to an embodiment of the invention;

FIG. **18** is a table of example values at nodes in the UDF module of FIG. **17**;

FIG. **19** is a detailed diagram of an example UDF module according to an embodiment of the invention;

FIGS. **20A** and **20A-1** are example aliasing modules according to embodiments of the invention;

FIGS. **20B–20F** are example waveforms used to describe the operation of the aliasing modules of FIGS. **20A** and **20A-1**;

FIG. **21** illustrates an enhanced signal reception system according to an embodiment of the invention;

FIGS. **22A–22F** are example waveforms used to describe the system of FIG. **21**;

FIG. **23A** illustrates an example transmitter in an enhanced signal reception system according to an embodiment of the invention;

FIGS. **23B** and **23C** are example waveforms used to further describe the enhanced signal reception system according to an embodiment of the invention;

FIG. **23D** illustrates another example transmitter in an enhanced signal reception system according to an embodiment of the invention;

FIGS. **23E** and **23F** are example waveforms used to further describe the enhanced signal reception system according to an embodiment of the invention,

FIG. **24A** illustrates an example receiver in an enhanced signal reception system according to an embodiment of the invention;

FIGS. **24**B–**24**J are example waveforms used to further describe the enhanced signal reception system according to an embodiment of the invention;

FIGS. **25**A–B illustrate carrier insertion;

FIGS. **26**A–C illustrate a balanced transmitter **2602** according to an embodiment of the present invention;

FIG. **26**B–C illustrate example waveforms that are associated with the balanced transmitter **2602** according to an embodiment of the present invention;

FIG. **26**D illustrates example FET configurations of the balanced transmitter **2602**;

FIGS. **27**A–I illustrate various example timing diagrams associated with the transmitter **2602**;

FIG. **27**J illustrates an example frequency spectrum associated with the modulator **2604**;

FIG. **28**A illustrate a balanced modulator **2802** configured for carrier insertion according to embodiments of the present invention;

FIG. **28**B illustrates example signal diagrams associated with the balanced transmitter **2802** according to embodiments of the invention;

FIG. **29** illustrates an I Q balanced transmitter **2920** according to embodiments of the present invention;

FIGS. **30**A–C illustrate various example signal diagrams associated with the balanced transmitter **2920** in FIG. **29**;

FIG. **31**A illustrates an I Q balanced transmitter **3108** according to embodiments of the invention;

FIG. **31**B illustrates an I Q balanced modulator **3118** according to embodiments of the invention;

FIG. **32** illustrates an I Q balanced modulator **3202** configured for carrier insertion according to embodiments of the invention;

FIG. **33** illustrates an I Q balanced modulator **3302** configured for carrier insertion according to embodiments of the invention;

FIGS. **34**A–B illustrate various input configurations for the balanced transmitter **2920** according to embodiments of the present invention;

FIGS. **35**A–B illustrate sidelobe requirements according to the IS-95 CDMA specification;

FIG. **36** illustrates a conventional CDMA transmitter **3600**;

FIG. **37**A illustrates a CDMA transmitter **3700** according to embodiments of the present invention;

FIGS. **37**B–E illustrate various example signal diagrams according to embodiments of the present invention;

FIG. **37**F illustrates a CDMA transmitter **3720** according to embodiments of the present invention;

FIG. **38** illustrates a CDMA transmitter utilizing a CMOS chip according to embodiments of the present invention;

FIG. **39** illustrates an example test set **3900**;

FIGS. **40**–**52**Z illustrate various example test results from testing the modulator **2910** in the test set **3900**;

FIGS. **53**A–C illustrate a transmitter **5300** and associated signal diagrams according to embodiments of the present invention;

FIGS. **54**A–B illustrate a transmitter **5400** and associated signal diagrams according to embodiments of the present invention;

FIG. **54**C illustrates a transmitter **5430** according to embodiments of the invention;

FIGS. **55**A–D illustrates various implementation circuits for the modulator **2910** according to embodiments of the present invention;

FIG. **56**A illustrate a transmitter **5600** according to embodiments of the present invention;

FIGS. **56**B–C illustrate various frequency spectrums that are associated with the transmitter **5600**;

FIG. **56**D illustrates a FET configuration for the modulator **5600**;

FIG. **57** illustrates a IQ transmitter **5700** according to embodiments of the present invention;

FIGS. **58**A–C illustrate various frequency spectrums that are associated with the IQ transmitter **5700**;

FIG. **59** illustrates an IQ transmitter **5900** according to embodiments of the present invention,

FIG. **60** illustrates an IQ transmitter **6000** according to embodiments of the present invention;

FIG. **61** illustrates an IQ transmitter **6100** according to embodiments of the invention;

FIG. **62** illustrates a flowchart **6200** that is associated with the transmitter **2602** in the FIG. **26**A according to an embodiment of the invention;

FIG. **63** illustrates a flowchart **6300** that further defines the flowchart **6200** in the FIG. **62**, and is associated with the transmitter **2602** according to an embodiment of the invention,

FIG. **64** illustrates a flowchart **6400** that further defines the flowchart **6200** in the FIG. **63** and is associated with the transmitter **6400** according to an embodiment of the invention,

FIG. **65** illustrates the flowchart **6500** that is associated with the transmitter **2920** in the FIG. **29** according to an embodiment of the invention;

FIG. **66** illustrates a flowchart **6600** that is associated with the transmitter **5700** according to an embodiment of the invention;

FIG. **67** illustrates a flowchart **6700** that is associated with the spread spectrum transmitter **5300** in FIG. **53**A according to an embodiment of the invention;

FIG. **68**A and FIG. **68**B illustrate a flowchart **6800** that is associated with an IQ spread spectrum modulator **6100** in FIG. **61** according to an embodiment of the invention;

FIG. **69**A and FIG. **69**B illustrate a flowchart **6900** that is associated with an IQ spread spectrum transmitter **5300** in FIG. **54**A according to an embodiment of the invention;

FIG. **70**A illustrates an IQ receiver having shunt UFT modules according to embodiments of the invention,

FIG. **70**B illustrates control signal generator embodiments for receiver **7000** according to embodiments of the invention;

FIGS. **70**C–D illustrate various control signal waveforms according to embodiments of the invention;

FIG. **70**E illustrates an example IQ modulation receiver embodiment according to embodiments of the invention;

FIGS. **70**F–P illustrate example waveforms that are representative of the IQ receiver in FIG. **70**E;

FIGS. **70**Q–R illustrate single channel receiver embodiments according to embodiments of the invention;

FIG. **71** illustrates a transceiver **7100** according to embodiments of the present invention;

FIG. **72** illustrates a transceiver **7200** according to embodiments of the present invention;

FIG. **73** illustrates a flowchart **7300** that is associated with the CDMA transmitter **3720** in FIG. **37** according to an embodiment of the invention;

FIG. **74**A illustrates various pulse generators according to embodiments of the invention;

FIGS. **74**B–C illustrate various example signal diagrams associated with the pulse generator in FIG. **74**A, according to embodiments of the invention; and

FIGS. **74**D–E illustrate various additional pulse generators according to embodiments of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Table of Contents

1. Universal Frequency Translation
2. Frequency Down-conversion
3. Frequency Up-conversion
4. Enhanced Signal Reception
5. Unified Down-conversion and Filtering
6. Other Example Application Embodiments of the Invention
7. Universal Transmitter
   7.1 Universal Transmitter Having 2 UFT Modules
      7.1.1 Balanced Modulator Detailed Description
      7.1.2 Balanced Modulator Example Signal Diagrams and Mathematical Description
      7.1.3 Balanced Modulator Having Shunt Configuration
      7.1.4 Balanced Modulator FET Configuration
      7.1.5 Universal Transmitter Configured for Carrier Insertion
   7.2 Universal Transmitter in an IQ Configuration
      7.2.1 IQ Transmitter Using Series-Type Balanced Modulator
      7.2.2 IQ Transmitter Using Shunt-Type Balanced Modulator
      7.2.3 IQ Transmitters Configured for Carrier Insertion
   7.3 Universal Transmitter and CDMA
      7.3.1 IS-95 CDMA Specifications
      7.3.2 Conventional CDMA Transmitter
      7.3.3 CDMA Transmitter Using the Present Invention
      7.3.4 CDMA Transmitter Measured Test Results
8. Integrated Up-conversion and Spreading of a Baseband Signal
   8.1 Integrated Up-Conversion and Spreading Using an Amplitude Shaper
   8.2 Integrated Up-Conversion and Spreading Using a Smoothing Varying Clock Signal
9. Shunt Receiver Embodiments Utilizing UFT modules
   9.1 Example I/Q Modulation Receiver Embodiments
      9.1.1 Example I/Q Modulation Control Signal Generator Embodiments
      9.1.2 Detailed Example I/Q Modulation Receiver Embodiment with Exemplary Waveforms
   9.2 Example Single Channel Receiver Embodiment
   9.3 Alternative Example I/Q Modulation Receiver Embodiment
10. Shunt Transceiver Embodiments Utilizing UFT Modules
11. Conclusion

1. Universal Frequency Translation

The present invention is related to frequency translation, and applications of same. Such applications include, but are not limited to, frequency down-conversion, frequency up-conversion, enhanced signal reception, unified down-conversion and filtering, and combinations and applications of same.

FIG. **1**A illustrates a universal frequency translation (UFT) module **102** according to embodiments of the invention. (The UFT module is also sometimes called a universal frequency translator, or a universal translator.)

As indicated by the example of FIG. **1**A, some embodiments of the UFT module **102** include three ports (nodes), designated in FIG. **1**A as Port **1**, Port **2**, and Port **3**. Other UFT embodiments include other than three ports.

Generally, the UFT module **102** (perhaps in combination with other components) operates to generate an output signal from an input signal, where the frequency of the output signal differs from the frequency of the input signal. In other words, the UFT module **102** (and perhaps other components) operates to generate the output signal from the input signal by translating the frequency (and perhaps other characteristics) of the input signal to the frequency (and perhaps other characteristics) of the output signal.

An example embodiment of the UFT module **103** is generally illustrated in FIG. **1**B. Generally, the UFT module **103** includes a switch **106** controlled by a control signal **108**. The switch **106** is said to be a controlled switch.

As noted above, some UFT embodiments include other than three ports. For example, and without limitation, FIG. **2** illustrates an example UFT module **202**. The example UFT module **202** includes a diode **204** having two ports, designated as Port **1** and Port **2**/**3**. This embodiment does not include a third port, as indicated by the dotted line around the "Port **3**" label. FIG. **2**B illustrates a second example UFT module **208** having a FET **210** whose gate is controlled by the control signal.

The UFT module is a very powerful and flexible device. Its flexibility is illustrated, in part, by the wide range of applications in which it can be used. Its power is illustrated, in part, by the usefulness and performance of such applications.

For example, a UFT module **115** can be used in a universal frequency down-conversion (UFD) module **114**, an example of which is shown in FIG. **1**C. In this capacity, the UFT module **115** frequency down-converts an input signal to an output signal.

As another example, as shown in FIG. **1**D, a UFT module **117** can be used in a universal frequency up-conversion (UFU) module **116**. In this capacity, the UFT module **117** frequency up-converts an input signal to an output signal.

These and other applications of the UFT module are described below. Additional applications of the UFT module will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. In some applications, the UFT module is a required component. In other applications, the UFT module is an optional component.

2. Frequency Down-Conversion

The present invention is directed to systems and methods of universal frequency down-conversion, and applications of same.

In particular, the following discussion describes down-converting using a Universal Frequency Translation Module. The down-conversion of an EM signal by aliasing the EM signal at an aliasing rate is fully described in co-pending U.S. patent application entitled "Method and System for Down-Converting Electromagnetic Signals," Ser. No. 09/176,022, filed Oct. 21, 1998, the full disclosure of which is incorporated herein by reference. A relevant portion of the above mentioned patent application is summarized below to describe down-converting an input signal to produce a down-converted signal that exists at a lower frequency or a baseband signal.

FIG. **20**A illustrates an aliasing module **2000** (one embodiment of a UFD module) for down-conversion using a universal frequency translation (UFT) module **2002**, which down-converts an EM input signal **2004**. In particular

embodiments, aliasing module **2000** includes a switch **2008** and a capacitor **2010**. The electronic alignment of the circuit components is flexible. That is, in one implementation, the switch **2008** is in series with input signal **2004** and capacitor **2010** is shunted to ground (although it may be other than ground in configurations such as differential mode). In a second implementation (see FIG. **20**A-**1**), the capacitor **2010** is in series with the input signal **2004** and the switch **2008** is shunted to ground (although it may be other than ground in configurations such as differential mode). Aliasing module **2000** with UFT module **2002** can be easily tailored to down-convert a wide variety of electromagnetic signals using aliasing frequencies that are well below the frequencies of the EM input signal **2004**.

In one implementation, aliasing module **2000** down-converts the input signal **2004** to an intermediate frequency (IF) signal. In another implementation, the aliasing module **2000** down-converts the input signal **2004** to a demodulated baseband signal. In yet another implementation, the input signal **2004** is a frequency modulated (FM) signal, and the aliasing module **2000** down-converts it to a non-FM signal, such as a phase modulated (PM) signal or an amplitude modulated (AM) signal. Each of the above implementations is described below.

In an embodiment, the control signal **2006** includes a train of pulses that repeat at an aliasing rate that is equal to, or less than, twice the frequency of the input signal **2004**. In this embodiment, the control signal **2006** is referred to herein as an aliasing signal because it is below the Nyquist rate for the frequency of the input signal **2004**. Preferably, the frequency of control signal **2006** is much less than the input signal **2004**.

A train of pulses **2018** as shown in FIG. **20**D controls the switch **2008** to alias the input signal **2004** with the control signal **2006** to generate a down-converted output signal **2012**. More specifically, in an embodiment, switch **2008** closes on a first edge of each pulse **2020** of FIG. **20**D and opens on a second edge of each pulse. When the switch **2008** is closed, the input signal **2004** is coupled to the capacitor **2010**, and charge is transferred from the input signal to the capacitor **2010**. The charge stored during successive pulses forms down-converted output signal **2012**.

Exemplary waveforms are shown in FIGS. **20**B–**20**F.

FIG. **20**B illustrates an analog amplitude modulated (AM) carrier signal **2014** that is an example of input signal **2004**. For illustrative purposes, in FIG. **20**C, an analog AM carrier signal portion **2016** illustrates a portion of the analog AM carrier signal **2014** on an expanded time scale. The analog AM carrier signal portion **2016** illustrates the analog AM carrier signal **2014** from time to t_0 time t_1.

FIG. **20**D illustrates an exemplary aliasing signal **2018** that is an example of control signal **2006**. Aliasing signal **2018** is on approximately the same time scale as the analog AM carrier signal portion **2016**. In the example shown in FIG. **20**D, the aliasing signal **2018** includes a train of pulses **2020** having negligible apertures that tend towards zero (the invention is not limited to this embodiment, as discussed below). The pulse aperture may also be referred to as the pulse width as will be understood by those skilled in the art(s). The pulses **2020** repeat at an aliasing rate, or pulse repetition rate of aliasing signal **2018**. The aliasing rate is determined as described below, and further described in co-pending U.S. patent application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

As noted above, the train of pulses **2020** (i.e., control signal **2006**) control the switch **2008** to alias the analog AM carrier signal **2016** (i.e., input signal **2004**) at the aliasing rate of the aliasing signal **2018**. Specifically, in this embodiment, the switch **2008** closes on a first edge of each pulse and opens on a second edge of each pulse. When the switch **2008** is closed, input signal **2004** is coupled to the capacitor **2010**, and charge is transferred from the input signal **2004** to the capacitor **2010**. The charge transferred during a pulse is referred to herein as an under-sample. Exemplary under-samples **2022** form down-converted signal portion **2024** (FIG. **20**E) that corresponds to the analog AM carrier signal portion **2016** (FIG. **20**C) and the train of pulses **2020** (FIG. **20**D). The charge stored during successive under-samples of AM carrier signal **2014** form the down-converted signal **2024** (FIG. **20**E) that is an example of down-converted output signal **2012** (FIG. **20**A). In FIG. **20**F, a demodulated baseband signal **2026** represents the demodulated baseband signal **2024** after filtering on a compressed time scale. As illustrated, down-converted signal **2026** has substantially the same "amplitude envelope" as AM carrier signal **2014**. Therefore, FIGS. **20**B–**20**F illustrate down-conversion of AM carrier signal **2014**.

The waveforms shown in FIGS. **20**B–**20**F are discussed herein for illustrative purposes only, and are not limiting. Additional exemplary time domain and frequency domain drawings, and exemplary methods and systems of the invention relating thereto, are disclosed in co-pending U.S. patent application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

The aliasing rate of control signal **2006** determines whether the input signal **2004** is down-converted to an IF signal, down-converted to a demodulated baseband signal, or down-converted from an FM signal to a PM or an AM signal. Generally, relationships between the input signal **2004**, the aliasing rate of the control signal **2006**, and the down-converted output signal **2012** are illustrated below:

(*Freq.* of input signal **2004**)=*n*·(*Freq.* of control signal **2006**)±(*Freq.* of down-converted output signal **2012**)

For the examples contained herein, only the "+" condition will be discussed. The value of n represents a harmonic or sub-harmonic of input signal **2004** (e.g., n=0.5, 1, 2, 3, . . .).

When the aliasing rate of control signal **2006** is off-set from the frequency of input signal **2004**, or off-set from a harmonic or sub-harmonic thereof, input signal **2004** is down-converted to an IF signal. This is because the under-sampling pulses occur at different phases of subsequent cycles of input signal **2004**. As a result, the under-samples form a lower frequency oscillating pattern. If the input signal **2004** includes lower frequency changes, such as amplitude, frequency, phase, etc., or any combination thereof, the charge stored during associated under-samples reflects the lower frequency changes, resulting in similar changes on the down-converted IF signal. For example, to down-convert a 901 MHZ input signal to a 1 MHZ IF signal, the frequency of the control signal **2006** would be calculated as follows:

$$(Freq_{input}-Freq_{IF})/n=Freq_{control}$$

$$(901\ MHZ-1\ MHZ)/n=900/n$$

For n=0.5, 1, 2, 3, 4, etc., the frequency of the control signal **2006** would be substantially equal to 1.8 GHz, 900 MHZ, 450 MHZ, 300 MHZ, 225 MHZ, etc.

Exemplary time domain and frequency domain drawings, illustrating down-conversion of analog and digital AM, PM and FM signals to IF signals, and exemplary methods and systems thereof, are disclosed in co-pending U.S. patent

application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

Alternatively, when the aliasing rate of the control signal **2006** is substantially equal to the frequency of the input signal **2004**, or substantially equal to a harmonic or sub-harmonic thereof, input signal **2004** is directly down-converted to a demodulated baseband signal. This is because, without modulation, the under-sampling pulses occur at the same point of subsequent cycles of the input signal **2004**. As a result, the under-samples form a constant output baseband signal. If the input signal **2004** includes lower frequency changes, such as amplitude, frequency, phase, etc., or any combination thereof, the charge stored during associated under-samples reflects the lower frequency changes, resulting in similar changes on the demodulated baseband signal. For example, to directly down-convert a 900 MHZ input signal to a demodulated baseband signal (i.e., zero IF), the frequency of the control signal **2006** would be calculated as follows:

$$(Freq_{input}-Freq_{IF})/n=Freq_{control}$$

$$(900\ MHZ-0\ MHZ)/n=900\ MHZ/n$$

For n=0.5, 1, 2, 3, 4, etc., the frequency of the control signal **2006** should be substantially equal to 1.8 GHz, 900 MHZ, **450** MHZ, 300 MHZ, 225 MHZ, etc.

Exemplary time domain and frequency domain drawings, illustrating direct down-conversion of analog and digital AM and PM signals to demodulated baseband signals, and exemplary methods and systems thereof, are disclosed in the co-pending U.S. patent application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

Alternatively, to down-convert an input FM signal to a non-FM signal, a frequency within the FM bandwidth must be down-converted to baseband (i.e., zero IF). As an example, to down-convert a frequency shift keying (FSK) signal (a sub-set of FM) to a phase shift keying (PSK) signal (a subset of PM), the mid-point between a lower frequency F_1 and an upper frequency F_2 (that is, $[(F_1+F_2)\div 2]$) of the FSK signal is down-converted to zero IF. For example, to down-convert an FSK signal having F_1 equal to 899 MHZ and F_2 equal to 901 MHZ, to a PSK signal, the aliasing rate of the control signal **2006** would be calculated as follows:

$$\text{Frequency of the input} = (F_1 + F_2) \div 2$$

$$= (899\ \text{MHZ} + 901\ \text{MHZ}) \div 2$$

$$= 900\ \text{MHZ}$$

Frequency of the down-converted signal=0 (i.e., baseband)

$$(Freq_{input} - Freq_{IF})/n = Freq_{control}$$

$$(900\ \text{MHZ} - 0\ \text{MHZ})/n = 900\ \text{MHZ}/n$$

For n=0.5, 1, 2, 3, etc., the frequency of the control signal **2006** should be substantially equal to 1.8 GHz, 900 MHZ, 450 MHZ, 300 MHZ, 225 MHZ, etc. The frequency of the down-converted PSK signal is substantially equal to one half the difference between the lower frequency F_1 and the upper frequency F_2.

As another example, to down-convert a FSK signal to an amplitude shift keying (ASK) signal (a subset of AM), either the lower frequency F_1 or the upper frequency F_2 of the FSK signal is down-converted to zero IF. For example, to down-convert an FSK signal having F_1 equal to 900 MHZ and F_2 equal to 901 MHZ, to an ASK signal, the aliasing rate of the control signal **2006** should be substantially equal to:

$$(900\ \text{MHZ} - 0\ \text{MHZ})/n = 900\ \text{MHZ}/n, \text{ or}$$

$$(901\ \text{MHZ} - 0\ \text{MHZ})/n = 901\ \text{MHZ}/n.$$

For the former case of 900 MHZ/n, and for n=0.5, 1, 2, 3, 4, etc., the frequency of the control signal **2006** should be substantially equal to 1.8 GHz, 900 MHZ, 450 MHZ, 300 MHZ, 225 MHZ, etc. For the latter case of 901 MHZ/n, and for n=0.5, 1, 2, 3, 4, etc., the frequency of the control signal **2006** should be substantially equal to 1.802 GHz, 901 MHZ, 450.5 MHZ, 300.333 MHZ, 225.25 MHZ, etc. The frequency of the down-converted AM signal is substantially equal to the difference between the lower frequency F_1, and the upper frequency F_2 (i.e., 1 MHZ).

Exemplary time domain and frequency domain drawings, illustrating down-conversion of FM signals to non-FM signals, and exemplary methods and systems thereof, are disclosed in the co-pending U.S. patent application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

In an embodiment, the pulses of the control signal **2006** have negligible apertures that tend towards zero. This makes the UFT module **2002** a high input impedance device. This configuration is useful for situations where minimal disturbance of the input signal may be desired.

In another embodiment, the pulses of the control signal **2006** have non-negligible apertures that tend away from zero. This makes the UFT module **2002** a lower input impedance device. This allows the lower input impedance of the UFT module **2002** to be substantially matched with a source impedance of the input signal **2004**. This also improves the energy transfer from the input signal **2004** to the down-converted output signal **2012**, and hence the efficiency and signal to noise (s/n) ratio of UFT module **2002**.

Exemplary systems and methods for generating and optimizing the control signal **2006** and for otherwise improving energy transfer and s/n ratio, are disclosed in the co-pending U.S. patent application entitled "Method and System for Down-converting Electromagnetic Signals," application Ser. No. 09/176,022.

3. Frequency Up-Conversion Using Universal Frequency Translation

The present invention is directed to systems and methods of frequency up-conversion, and applications of same.

An example frequency up-conversion system **300** is illustrated in FIG. **3**. The frequency up-conversion system **300** is now described.

An input signal **302** (designated as "Control Signal" in FIG. **3**) is accepted by a switch module **304**. For purposes of example only, assume that the input signal **302** is a FM input signal **606**, an example of which is shown in FIG. **6**C. FM input signal **606** may have been generated by modulating information signal **602** onto oscillating signal **604** (FIGS. **6**A and **6**B). It should be understood that the invention is not limited to this embodiment. The information signal **602** can be analog, digital, or any combination thereof, and any modulation scheme can be used.

The output of switch module **304** is a harmonically rich signal **306**, shown for example in FIG. **6**D as a harmonically rich signal **608**. The harmonically rich signal **608** has a continuous and periodic waveform.

FIG. **6**E is an expanded view of two sections of harmonically rich signal **608**, section **610** and section **612**. The harmonically rich signal **608** may be a rectangular wave, such as a square wave or a pulse (although, the invention is not limited to this embodiment). For ease of discussion, the term "rectangular waveform" is used to refer to waveforms that are substantially rectangular. In a similar manner, the term "square wave" refers to those waveforms that are substantially square and it is not the intent of the present invention that a perfect square wave be generated or needed.

Harmonically rich signal **608** is comprised of a plurality of sinusoidal waves whose frequencies are integer multiples of the fundamental frequency of the waveform of the harmonically rich signal **608**. These sinusoidal waves are referred to as the harmonics of the underlying waveform, and the fundamental frequency is referred to as the first harmonic. FIG. **6**F and FIG. **6**G show separately the sinusoidal components making up the first, third, and fifth harmonics of section **610** and section **612**. (Note that in theory there may be an infinite number of harmonics; in this example, because harmonically rich signal **608** is shown as a square wave, there are only odd harmonics). Three harmonics are shown simultaneously (but not summed) in FIG. **6**H.

The relative amplitudes of the harmonics are generally a function of the relative widths of the pulses of harmonically rich signal **306** and the period of the fundamental frequency, and can be determined by doing a Fourier analysis of harmonically rich signal **306**. According to an embodiment of the invention, the input signal **606** may be shaped to ensure that the amplitude of the desired harmonic is sufficient for its intended use (e.g., transmission).

A filter **308** filters out any undesired frequencies (harmonics), and outputs an electromagnetic (EM) signal at the desired harmonic frequency or frequencies as an output signal **310**, shown for example as a filtered output signal **614** in FIG. **61**.

FIG. **4** illustrates an example universal frequency up-conversion (UFU) module **401**. The UFU module **401** includes an example switch module **304**, which comprises a bias signal **402**, a resistor or impedance **404**, a universal frequency translator (UFT) **450**, and a ground **408**. The UFT **450** includes a switch **406**. The input signal **302** (designated as "Control Signal" in FIG. **4**) controls the switch **406** in the UFT **450**, and causes it to close and open. Harmonically rich signal **306** is generated at a node **405** located between the resistor or impedance **404** and the switch **406**.

Also in FIG. **4**, it can be seen that an example filter **308** is comprised of a capacitor **410** and an inductor **412** shunted to a ground **414**. The filter is designed to filter out the undesired harmonics of harmonically rich signal **306**.

The invention is not limited to the UFU embodiment shown in FIG. **4**.

For example, in an alternate embodiment shown in FIG. **5**, an unshaped input signal **501** is routed to a pulse shaping module **502**. The pulse shaping module **502** modifies the unshaped input signal **501** to generate a (modified) input signal **302** (designated as the "Control Signal" in FIG. **5**). The input signal **302** is routed to the switch module **304**, which operates in the manner described above. Also, the filter **308** of FIG. **5** operates in the manner described above.

The purpose of the pulse shaping module **502** is to define the pulse width of the input signal **302**. Recall that the input signal **302** controls the opening and closing of the switch **406** in switch module **304**. During such operation, the pulse width of the input signal **302** establishes the pulse width of the harmonically rich signal **306**. As stated above, the relative amplitudes of the harmonics of the harmonically rich signal **306** are a function of at least the pulse width of the harmonically rich signal **306**. As such, the pulse width of the input signal **302** contributes to setting the relative amplitudes of the harmonics of harmonically rich signal **306**.

Further details of up-conversion as described in this section are presented in pending U.S. application "Method and System for Frequency Up-Conversion," Ser. No. 09/176,154, filed Oct. 21, 1998, incorporated herein by reference in its entirety.

4. Enhanced Signal Reception

The present invention is directed to systems and methods of enhanced signal reception (ESR), and applications of same.

Referring to FIG. **21**, transmitter **2104** accepts a modulating baseband signal **2102** and generates (transmitted) redundant spectrums **2106***a–n*, which are sent over communications medium **2108**. Receiver **2112** recovers a demodulated baseband signal **2114** from (received) redundant spectrums **2110***a–n*. Demodulated baseband signal **2114** is representative of the modulating baseband signal **2102**, where the level of similarity between the modulating baseband signal **2114** and the modulating baseband signal **2102** is application dependent.

Modulating baseband signal **2102** is preferably any information signal desired for transmission and/or reception. An example modulating baseband signal **2202** is illustrated in FIG. **22**A, and has an associated modulating baseband spectrum **2204** and image spectrum **2203** that are illustrated in FIG. **22**B. Modulating baseband signal **2202** is illustrated as an analog signal in FIG. **22***a*, but could also be a digital signal, or combination thereof. Modulating baseband signal **2202** could be a voltage (or current) characterization of any number of real world occurrences, including for example and without limitation, the voltage (or current) representation for a voice signal.

Each transmitted redundant spectrum **2106***a–n* contains the necessary information to substantially reconstruct the modulating baseband signal **2102**. In other words, each redundant spectrum **2106***a–n* contains the necessary amplitude, phase, and frequency information to reconstruct the modulating baseband signal **2102**.

FIG. **22**C illustrates example transmitted redundant spectrums **2206***b–d*. Transmitted redundant spectrums **2206***b–d* are illustrated to contain three redundant spectrums for illustration purposes only. Any number of redundant spectrums could be generated and transmitted as will be explained in following discussions.

Transmitted redundant spectrums **2206***b–d* are centered at f_1, with a frequency spacing f_2 between adjacent spectrums. Frequencies f_1 and f_2 are dynamically adjustable in real-time as will be shown below. FIG. **22**D illustrates an alternate embodiment, where redundant spectrums **2208***c,d* are centered on unmodulated oscillating signal **2209** at f_1 (Hz). Oscillating signal **2209** may be suppressed if desired using, for example, phasing techniques or filtering techniques. Transmitted redundant spectrums are preferably above baseband frequencies as is represented by break **2205** in the frequency axis of FIGS. **22**C and **22**D.

Received redundant spectrums **2110***a–n* are substantially similar to transmitted redundant spectrums **2106***a–n*, except for the changes introduced by the communications medium **2108**. Such changes can include but are not limited to signal attenuation, and signal interference. FIG. **22**E illustrates example received redundant spectrums **2210***b–d*. Received redundant spectrums **2210***b–d* are substantially similar to

transmitted redundant spectrums **2206***b–d*, except that redundant spectrum **2210***c* includes an undesired jamming signal spectrum **2211** in order to illustrate some advantages of the present invention. Jamming signal spectrum **2211** is a frequency spectrum associated with a jamming signal. For purposes of this invention, a "jamming signal" refers to any unwanted signal, regardless of origin, that may interfere with the proper reception and reconstruction of an intended signal. Furthermore, the jamming signal is not limited to tones as depicted by spectrum **2211**, and can have any spectral shape, as will be understood by those skilled in the art(s).

As stated above, demodulated baseband signal **2114** is extracted from one or more of received redundant spectrums **2210***b–d*. FIG. **22**F illustrates example demodulated baseband signal **2212** that is, in this example, substantially similar to modulating baseband signal **2202** (FIG. **22**A); where in practice, the degree of similarity is application dependent.

An advantage of the present invention should now be apparent. The recovery of modulating baseband signal **2202** can be accomplished by receiver **2112** in spite of the fact that high strength jamming signal(s) (e.g. jamming signal spectrum **2211**) exist on the communications medium. The intended baseband signal can be recovered because multiple redundant spectrums are transmitted, where each redundant spectrum carries the necessary information to reconstruct the baseband signal. At the destination, the redundant spectrums are isolated from each other so that the baseband signal can be recovered even if one or more of the redundant spectrums are corrupted by a jamming signal.

Transmitter **2104** will now be explored in greater detail. FIG. **23**A illustrates transmitter **2301**, which is one embodiment of transmitter **2104** that generates redundant spectrums configured similar to redundant spectrums **2206***b–d*. Transmitter **2301** includes generator **2303**, optional spectrum processing module **2304**, and optional medium interface module **2320**. Generator **2303** includes: first oscillator **2302**, second oscillator **2309**, first stage modulator **2306**, and second stage modulator **2310**.

Transmitter **2301** operates as follows. First oscillator **2302** and second oscillator **2309** generate a first oscillating signal **2305** and second oscillating signal **2312**, respectively. First stage modulator **2306** modulates first oscillating signal **2305** with modulating baseband signal **2202**, resulting in modulated signal **2308**. First stage modulator **2306** may implement any type of modulation including but not limited to: amplitude modulation, frequency modulation, phase modulation, combinations thereof, or any other type of modulation. Second stage modulator **2310** modulates modulated signal **2308** with second oscillating signal **2312**, resulting in multiple redundant spectrums **2206***a–n* shown in FIG. **23**B. Second stage modulator **2310** is preferably a phase modulator, or a frequency modulator, although other types of modulation may be implemented including but not limited to amplitude modulation. Each redundant spectrum **2206***a–n* contains the necessary amplitude, phase, and frequency information to substantially reconstruct the modulating baseband signal **2202**.

Redundant spectrums **2206***a–n* are substantially centered around f_1, which is the characteristic frequency of first oscillating signal **2305**. Also, each redundant spectrum **2206***a–n* (except for **2206***c*) is offset from f_1 by approximately a multiple of f_2 (Hz), where f_2 is the frequency of the second oscillating signal **2312**. Thus, each redundant spectrum **2206***a–n* is offset from an adjacent redundant spectrum by f_2 (Hz). This allows the spacing between adjacent redundant spectrums to be adjusted (or tuned) by changing f_2 that is associated with second oscillator **2309**. Adjusting the spacing between adjacent redundant spectrums allows for dynamic real-time tuning of the bandwidth occupied by redundant spectrums **2206***a–n*.

In one embodiment, the number of redundant spectrums **2206***a–n* generated by transmitter **2301** is arbitrary and may be unlimited as indicated by the "a–n" designation for redundant spectrums **2206***a–n*. However, a typical communications medium will have a physical and/or administrative limitations (i.e. FCC regulations) that restrict the number of redundant spectrums that can be practically transmitted over the communications medium. Also, there may be other reasons to limit the number of redundant spectrums transmitted. Therefore, preferably, the transmitter **2301** will include an optional spectrum processing module **2304** to process the redundant spectrums **2206***a–n* prior to transmission over communications medium **2108**.

In one embodiment, spectrum processing module **2304** includes a filter with a passband **2207** (FIG. **23**C) to select redundant spectrums **2206***b–d* for transmission. This will substantially limit the frequency bandwidth occupied by the redundant spectrums to the passband **2207**. In one embodiment, spectrum processing module **2304** also up converts redundant spectrums and/or amplifies redundant spectrums prior to transmission over the communications medium **2108**. Finally, medium interface module **2320** transmits redundant spectrums over the communications medium **2108**. In one embodiment, communications medium **2108** is an over-the-air link and medium interface module **2320** is an antenna. Other embodiments for communications medium **2108** and medium interface module **2320** will be understood based on the teachings contained herein.

FIG. **23**D illustrates transmitter **2321**, which is one embodiment of transmitter **2104** that generates redundant spectrums configured similar to redundant spectrums **2208***c–d* and unmodulated spectrum **2209**. Transmitter **2321** includes generator **2311**, spectrum processing module **2304**, and (optional) medium interface module **2320**. Generator **2311** includes: first oscillator **2302**, second oscillator **2309**, first stage modulator **2306**, and second stage modulator **2310**.

As shown in FIG. **23**D, many of the components in transmitter **2321** are similar to those in transmitter **2301**. However, in this embodiment, modulating baseband signal **2202** modulates second oscillating signal **2312**. Transmitter **2321** operates as follows. First stage modulator **2306** modulates second oscillating signal **2312** with modulating baseband signal **2202**, resulting in modulated signal **2322**. As described earlier, first stage modulator **2306** can effect any type of modulation including but not limited to: amplitude modulation frequency modulation, combinations thereof, or any other type of modulation. Second stage modulator **2310** modulates first oscillating signal **2304** with modulated signal **2322**, resulting in redundant spectrums **2208***a–n*, as shown in FIG. **23**E. Second stage modulator **2310** is preferably a phase or frequency modulator, although other modulators could used including but not limited to an amplitude modulator.

Redundant spectrums **2208***a–n* are centered on unmodulated spectrum **2209** (at f_1 Hz), and adjacent spectrums are separated by f_2 Hz. The number of redundant spectrums **2208***a–n* generated by generator **2311** is arbitrary and unlimited, similar to spectrums **2206***a–n* discussed above. Therefore, optional spectrum processing module **2304** may also include a filter with passband **2325** to select, for example, spectrums **2208***c,d* for transmission over commu-

nications medium **2108**. In addition, optional spectrum processing module **2304** may also include a filter (such as a bandstop filter) to attenuate unmodulated spectrum **2209**. Alternatively, unmodulated spectrum **2209** may be attenuated by using phasing techniques during redundant spectrum generation. Finally, (optional) medium interface module **2320** transmits redundant spectrums **2208***c,d* over communications medium **2108**.

Receiver **2112** will now be explored in greater detail to illustrate recovery of a demodulated baseband signal from received redundant spectrums. FIG. **24**A illustrates receiver **2430**, which is one embodiment of receiver **2112**. Receiver **2430** includes optional medium interface module **2402**, down-converter **2404**, spectrum isolation module **2408**, and data extraction module **2414**. Spectrum isolation module **2408** includes filters **2410***a–c*. Data extraction module **2414** includes demodulators **2416***a–c*, error check modules **2420***a–c*, and arbitration module **2424**. Receiver **2430** will be discussed in relation to the signal diagrams in FIGS. **24**B–**24**J.

In one embodiment, optional medium interface module **2402** receives redundant spectrums **2210***b–d* (FIG. **22**E, and FIG. **24**B). Each redundant spectrum **2210***b–d* includes the necessary amplitude, phase, and frequency information to substantially reconstruct the modulating baseband signal used to generated the redundant spectrums. However, in the present example, spectrum **2210***c* also contains jamming signal **2211**, which may interfere with the recovery of a baseband signal from spectrum **2210***c*. Down-converter **2404** down-converts received redundant spectrums **2210***b–d* to lower intermediate frequencies, resulting in redundant spectrums **2406***a–c* (FIG. **24**C). Jamming signal **2211** is also down-converted to jamming signal **2407**, as it is contained within redundant spectrum **2406***b*. Spectrum isolation module **2408** includes filters **2410***a–c* that isolate redundant spectrums **2406***a–c* from each other (FIGS. **24**D–**24**F, respectively). Demodulators **2416***a–c* independently demodulate spectrums **2406***a–c*, resulting in demodulated baseband signals **2418***a–c*, respectively (FIGS. **24**G–**24**I). Error check modules **2420***a–c* analyze demodulate baseband signal **2418***a–c* to detect any errors. In one embodiment, each error check module **2420***a–c* sets an error flag **2422***a–c* whenever an error is detected in a demodulated baseband signal. Arbitration module **2424** accepts the demodulated baseband signals and associated error flags, and selects a substantially error-free demodulated baseband signal (FIG. **24**J). In one embodiment, the substantially error-free demodulated baseband signal will be substantially similar to the modulating baseband signal used to generate the received redundant spectrums, where the degree of similarity is application dependent.

Referring to FIGS. **24**G–I, arbitration module **2424** will select either demodulated baseband signal **2418***a* or **2418***c*, because error check module **2420***b* will set the error flag **2422***b* that is associated with demodulated baseband signal **2418***b*.

The error detection schemes implemented by the error detection modules include but are not limited to: cyclic redundancy check (CRC) and parity check for digital signals, and various error detections schemes for analog signal.

Further details of enhanced signal reception as described in this section are presented in pending U.S. application "Method and System for Ensuring Reception of a Communications Signal," Ser. No. 09/176,415, filed Oct. 21, 1998, incorporated herein by reference in its entirety.

5. Unified Down-Conversion and Filtering

The present invention is directed to systems and methods of unified down-conversion and filtering (UDF), and applications of same.

In particular, the present invention includes a unified down-converting and filtering (UDF) module that performs frequency selectivity and frequency translation in a unified (i.e., integrated) manner. By operating in this manner, the invention achieves high frequency selectivity prior to frequency translation (the invention is not limited to this embodiment). The invention achieves high frequency selectivity at substantially any frequency, including but not limited to RF (radio frequency) and greater frequencies. It should be understood that the invention is not limited to this example of RF and greater frequencies. The invention is intended, adapted, and capable of working with lower than radio frequencies.

FIG. **17** is a conceptual block diagram of a UDF module **1702** according to an embodiment of the present invention. The UDF module **1702** performs at least frequency translation and frequency selectivity.

The effect achieved by the UDF module **1702** is to perform the frequency selectivity operation prior to the performance of the frequency translation operation. Thus, the UDF module **1702** effectively performs input filtering.

According to embodiments of the present invention, such input filtering involves a relatively narrow bandwidth. For example, such input filtering may represent channel select filtering, where the filter bandwidth may be, for example, 50 KHz to 150 KHz. It should be understood, however, that the invention is not limited to these frequencies. The invention is intended, adapted, and capable of achieving filter bandwidths of less than and greater than these values.

In embodiments of the invention, input signals **1704** received by the UDF module **1702** are at radio frequencies. The UDF module **1702** effectively operates to input filter these RF input signals **1704**. Specifically, in these embodiments, the UDF module **1702** effectively performs input, channel select filtering of the RF input signal **1704**. Accordingly, the invention achieves high selectivity at high frequencies.

The UDF module **1702** effectively performs various types of filtering, including but not limited to bandpass filtering, low pass filtering, high pass filtering, notch filtering, all pass filtering, band stop filtering, etc., and combinations thereof.

Conceptually, the UDF module **1702** includes a frequency translator **1708**. The frequency translator **1708** conceptually represents that portion of the UDF module **1702** that performs frequency translation (down conversion).

The UDF module **1702** also conceptually includes an apparent input filter **1706** (also sometimes called an input filtering emulator). Conceptually, the apparent input filter **1706** represents that portion of the UDF module **1702** that performs input filtering.

In practice, the input filtering operation performed by the UDF module **1702** is integrated with the frequency translation operation. The input filtering operation can be viewed as being performed concurrently with the frequency translation operation. This is a reason why the input filter **1706** is herein referred to as an "apparent" input filter **1706**.

The UDF module **1702** of the present invention includes a number of advantages. For example, high selectivity at high frequencies is realizable using the UDF module **1702**. This feature of the invention is evident by the high Q factors that are attainable. For example, and without limitation, the UDF module **1702** can be designed with a filter center frequency f_C on the order of 900 MHZ, and a filter band-

width on the order of 50 KHz. This represents a Q of 18,000 (Q is equal to the center frequency divided by the bandwidth).

It should be understood that the invention is not limited to filters with high Q factors. The filters contemplated by the present invention may have lesser or greater Qs, depending on the application, design, and/or implementation. Also, the scope of the invention includes filters where Q factor as discussed herein is not applicable.

The invention exhibits additional advantages. For example, the filtering center frequency f_C of the UDF module **1702** can be electrically adjusted, either statically or dynamically.

Also, the UDF module **1702** can be designed to amplify input signals.

Further, the UDF module **1702** can be implemented without large resistors, capacitors, or inductors. Also, the UDF module **1702** does not require that tight tolerances be maintained on the values of its individual components, i.e., its resistors, capacitors, inductors, etc. As a result, the architecture of the UDF module **1702** is friendly to integrated circuit design techniques and processes.

The features and advantages exhibited by the UDF module **1702** are achieved at least in part by adopting a new technological paradigm with respect to frequency selectivity and translation. Specifically, according to the present invention, the UDF module **1702** performs the frequency selectivity operation and the frequency translation operation as a single, unified (integrated) operation. According to the invention, operations relating to frequency translation also contribute to the performance of frequency selectivity, and vice versa.

According to embodiments of the present invention, the UDF module generates an output signal from an input signal using samples/instances of the input signal and samples/instances of the output signal.

More particularly, first, the input signal is under-sampled. This input sample includes information (such as amplitude, phase, etc.) representative of the input signal existing at the time the sample was taken.

As described further below, the effect of repetitively performing this step is to translate the frequency (that is, down-convert) of the input signal to a desired lower frequency, such as an intermediate frequency (IF) or baseband.

Next, the input sample is held (that is, delayed).

Then, one or more delayed input samples (some of which may have been scaled) are combined with one or more delayed instances of the output signal (some of which may have been scaled) to generate a current instance of the output signal.

Thus, according to a preferred embodiment of the invention, the output signal is generated from prior samples/instances of the input signal and/or the output signal. (It is noted that, in some embodiments of the invention, current samples/instances of the input signal and/or the output signal may be used to generate current instances of the output signal.). By operating in this manner, the UDF module preferably performs input filtering and frequency down-conversion in a unified manner.

FIG. **19** illustrates an example implementation of the unified down-converting and filtering (UDF) module **1922**. The UDF module **1922** performs the frequency translation operation and the frequency selectivity operation in an integrated, unified manner as described above, and as further described below.

In the example of FIG. **19**, the frequency selectivity operation performed by the UDF module **1922** comprises a band-pass filtering operation according to EQ. 1, below, which is an example representation of a band-pass filtering transfer function.

$$VO=\alpha_1 z^{-1} VI-\beta_1 z^{-1} VO-\beta_0 z^{-2} VO \quad \text{EQ. 1}$$

It should be noted, however, that the invention is not limited to band-pass filtering. Instead, the invention effectively performs various types of filtering, including but not limited to bandpass filtering, low pass filtering, high pass filtering, notch filtering, all pass filtering, band stop filtering, etc., and combinations thereof. As will be appreciated, there are many representations of any given filter type. The invention is applicable to these filter representations. Thus, EQ. 1 is referred to herein for illustrative purposes only, and is not limiting.

The UDF module **1922** includes a down-convert and delay module **1924**, first and second delay modules **1928** and **1930**, first and second scaling modules **1932** and **1934**, an output sample and hold module **1936**, and an (optional) output smoothing module **1938**. Other embodiments of the UDF module will have these components in different configurations, and/or a subset of these components, and/or additional components. For example, and without limitation, in the configuration shown in FIG. **19**, the output smoothing module **1938** is optional.

As further described below, in the example of FIG. **19**, the down-convert and delay module **1924** and the first and second delay modules **1928** and **1930** include switches that are controlled by a clock having two phases, ϕ_1 and ϕ_2. ϕ_1 and ϕ_2 preferably have the same frequency, and are non-overlapping (alternatively, a plurality such as two clock signals having these characteristics could be used). As used herein, the term "non-overlapping" is defined as two or more signals where only one of the signals is active at any given time. In some embodiments, signals are "active" when they are high. In other embodiments, signals are active when they are low.

Preferably, each of these switches closes on a rising edge of ϕ_1 or ϕ_2, and opens on the next corresponding falling edge of ϕ_1 or ϕ_2. However, the invention is not limited to this example. As will be apparent to persons skilled in the relevant art(s), other clock conventions can be used to control the switches.

In the example of FIG. **19**, it is assumed that α_1 is equal to one. Thus, the output of the down-convert and delay module **1924** is not scaled. As evident from the embodiments described above, however, the invention is not limited to this example.

The example UDF module **1922** has a filter center frequency of 900.2 MHZ and a filter bandwidth of 570 KHz. The pass band of the UDF module **1922** is on the order of 899.915 MHZ to 900.485 MHZ. The Q factor of the UDF module **1922** is approximately 1879 (i.e., 900.2 MHZ divided by 570 KHz).

The operation of the UDF module **1922** shall now be described with reference to a Table **1802** (FIG. **18**) that indicates example values at nodes in the UDF module **1922** at a number of consecutive time increments. It is assumed in Table **1802** that the UDF module **1922** begins operating at time t−1. As indicated below, the UDF module **1922** reaches steady state a few time units after operation begins. The number of time units necessary for a given UDF module to reach steady state depends on the configuration of the UDF module, and will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein.

At the rising edge of ϕ_1 at time t−1, a switch **1950** in the down-convert and delay module **1924** closes. This allows a

capacitor **1952** to charge to the current value of an input signal, VI_{t-1}, such that node **1902** is at VI_{t-1}. This is indicated by cell **1804** in FIG. **18**. In effect, the combination of the switch **1950** and the capacitor **1952** in the down-convert and delay module **1924** operates to translate the frequency of the input signal VI to a desired lower frequency, such as IF or baseband. Thus, the value stored in the capacitor **1952** represents an instance of a down-converted image of the input signal VI.

The manner in which the down-convert and delay module **1924** performs frequency down-conversion is further described elsewhere in this application, and is additionally described in pending U.S. application "Method and System for Down-Converting Electromagnetic Signals," Ser. No. 09/176,022, filed Oct. 21, 1998, which is herein incorporated by reference in its entirety.

Also at the rising edge of ϕ_1 at time t−1, a switch **1958** in the first delay module **1928** closes, allowing a capacitor **1960** to charge to VO_{t-1}, such that node **1906** is at VO_{t-1}. This is indicated by cell **1806** in Table **1802**. (In practice, VO_{t-1} is undefined at this point. However, for ease of understanding, VO_{t-1} shall continue to be used for purposes of explanation.)

Also at the rising edge of ϕ_1 at time t−1, a switch **1966** in the second delay module **1930** closes, allowing a capacitor **1968** to charge to a value stored in a capacitor **1964**. At this time, however, the value in capacitor **1964** is undefined, so the value in capacitor **1968** is undefined. This is indicated by cell **1807** in table **1802**.

At the rising edge of ϕ_2 at time t−1, a switch **1954** in the down-convert and delay module **1924** closes, allowing a capacitor **1956** to charge to the level of the capacitor **1952**. Accordingly, the capacitor **1956** charges to VI_{t-1}, such that node **1904** is at VI_{t-1}. This is indicated by cell **1810** in Table **1802**.

The UDF module **1922** may optionally include a unity gain module **1990**A between capacitors **1952** and **1956**. The unity gain module **1990**A operates as a current source to enable capacitor **1956** to charge without draining the charge from capacitor **1952**. For a similar reason, the UDF module **1922** may include other unity gain modules **1990**B–**1990**G. It should be understood that, for many embodiments and applications of the invention, these unity gain modules **1990**A–**1990**G are optional. The structure and operation of the unity gain modules **1990** will be apparent to persons skilled in the relevant art(s).

Also at the rising edge of ϕ_2 at time t−1, a switch **1962** in the first delay module **1928** closes, allowing a capacitor **1964** to charge to the level of the capacitor **1960**. Accordingly, the capacitor **1964** charges to VO_{t-1}, such that node **1908** is at VO_{t-1}. This is indicated by cell **1814** in Table **1802**.

Also at the rising edge of ϕ_2 at time t−1, a switch **1970** in the second delay module **1930** closes, allowing a capacitor **1972** to charge to a value stored in a capacitor **1968**. At this time, however, the value in capacitor **1968** is undefined, so the value in capacitor **1972** is undefined. This is indicated by cell **1815** in table **1802**.

At time t, at the rising edge of ϕ_1, the switch **1950** in the down-convert and delay module **1924** closes. This allows the capacitor **1952** to charge to VI_t, such that node **1902** is at VI_t. This is indicated in cell **1816** of Table **1802**.

Also at the rising edge of ϕ_1 at time t, the switch **1958** in the first delay module **1928** closes, thereby allowing the capacitor **1960** to charge to VO_t. Accordingly, node **1906** is at VO_t. This is indicated in cell **1820** in Table **1802**.

Further at the rising edge of ϕ_1 at time t, the switch **1966** in the second delay module **1930** closes, allowing a capacitor **1968** to charge to the level of the capacitor **1964**. Therefore, the capacitor **1968** charges to VO_{t-1}, such that node **1910** is at VO_{t-1}. This is indicated by cell **1824** in Table **1802**.

At the rising edge of ϕ_2 at time t, the switch **1954** in the down-convert and delay module **1924** closes, allowing the capacitor **1956** to charge to the level of the capacitor **1952**. Accordingly, the capacitor **1956** charges to VI_t, such that node **1904** is at VI_t. This is indicated by cell **1828** in Table **1802**.

Also at the rising edge of ϕ_2 at time t, the switch **1962** in the first delay module **1928** closes, allowing the capacitor **1964** to charge to the level in the capacitor **1960**. Therefore, the capacitor **1964** charges to VO_t, such that node **1908** is at VO_t. This is indicated by cell **1832** in Table **1802**.

Further at the rising edge of ϕ_2 at time t, the switch **1970** in the second delay module **1930** closes, allowing the capacitor **1972** in the second delay module **1930** to charge to the level of the capacitor **1968** in the second delay module **1930**. Therefore, the capacitor **1972** charges to VO_{t-1}, such that node **1912** is at VO_{t-1}. This is indicated in cell **1836** of FIG. **18**.

At time t+1, at the rising edge of ϕ_1, the switch **1950** in the down-convert and delay module **1924** closes, allowing the capacitor **1952** to charge to VI_{t-1}. Therefore, node **1902** is at VI_{t+1}, as indicated by cell **1838** of Table **1802**.

Also at the rising edge of ϕ_1 at time t+1, the switch **1958** in the first delay module **1928** closes, allowing the capacitor **1960** to charge to VO_{t+1}. Accordingly, node **1906** is at VO_{t+1}, as indicated by cell **1842** in Table **1802**.

Further at the rising edge of ϕ_1 at time t+1, the switch **1966** in the second delay module **1930** closes, allowing the capacitor **1968** to charge to the level of the capacitor **1964**. Accordingly, the capacitor **1968** charges to VO_t, as indicated by cell **1846** of Table **1802**.

In the example of FIG. **19**, the first scaling module **1932** scales the value at node **1908** (i.e., the output of the first delay module **1928**) by a scaling factor of −0.1. Accordingly, the value present at node **1914** at time t+1 is $-0.1*VO_t$. Similarly, the second scaling module **1934** scales the value present at node **1912** (i.e., the output of the second scaling module **1930**) by a scaling factor of −0.8. Accordingly, the value present at node **1916** is $-0.8*VO_{t-1}$ at time t+1.

At time t+1, the values at the inputs of the summer **1926** are: VI_t at node **1904**, $-0.1*VO_t$ at node **1914**, and $-0.8*VO_{t-1}$ at node **1916** (in the example of FIG. **19**, the values at nodes **1914** and **1916** are summed by a second summer **1925**, and this sum is presented to the summer **1926**). Accordingly, at time t+1, the summer generates a signal equal to $VI_t-0.1*VO_t-0.8*VO_{t-1}$.

At the rising edge of ϕ_1 at time t+1, a switch **1991** in the output sample and hold module **1936** closes, thereby allowing a capacitor **1992** to charge to $VO_{t+}1$. Accordingly, the capacitor **1992** charges to $VO_{t+}1$, which is equal to the sum generated by the adder **1926**. As just noted, this value is equal to: $VI_t-0.1*VO_t-0.8*VO_{t-1}$. This is indicated in cell **1850** of Table **1802**. This value is presented to the optional output smoothing module **1938**, which smooths the signal to thereby generate the instance of the output signal $VO_{t+}1$. It is apparent from inspection that this value of $VO_{t+}1$ is consistent with the band pass filter transfer function of EQ. 1.

Further details of unified down-conversion and filtering as described in this section are presented in pending U.S. application "Integrated Frequency Translation And Selectivity," Ser. No. 09/175,966, filed Oct. 21, 1998, incorporated herein by reference in its entirety.

6. Example Application Embodiments of the Invention

As noted above, the UFT module of the present invention is a very powerful and flexible device. Its flexibility is illustrated, in part, by the wide range of applications in which it can be used. Its power is illustrated, in part, by the usefulness and performance of such applications.

Example applications of the UFT module were described above. In particular, frequency down-conversion, frequency up-conversion, enhanced signal reception, and unified down-conversion and filtering applications of the UFT module were summarized above, and are further described below. These applications of the UFT module are discussed herein for illustrative purposes. The invention is not limited to these example applications. Additional applications of the UFT module will be apparent to persons skilled in the relevant art(s), based on the teachings contained herein.

For example, the present invention can be used in applications that involve frequency down-conversion. This is shown in FIG. **1**C, for example, where an example UFT module **115** is used in a down-conversion module **1114**. In this capacity, the UFT module **115** frequency down-converts an input signal to an output signal. This is also shown in FIG. **7**, for example, where an example UFT module **706** is part of a down-conversion module **704**, which is part of a receiver **702**.

The present invention can be used in applications that involve frequency up-conversion. This is shown in FIG. **1**D, for example, where an example UFT module **117** is used in a frequency up-conversion module **116**. In this capacity, the UFT module **117** frequency up-converts an input signal to an output signal. This is also shown in FIG. **8**, for example, where an example UFT module **806** is part of up-conversion module **804**, which is part of a transmitter **802**.

The present invention can be used in environments having one or more transmitters **902** and one or more receivers **906**, as illustrated in FIG. **9**. In such environments, one or more of the transmitters **902** may be implemented using a UFT module, as shown for example in FIG. **8**. Also, one or more of the receivers **906** may be implemented using a UFT module, as shown for example in FIG. **7**.

The invention can be used to implement a transceiver. An example transceiver **1002** is illustrated in FIG. **10**. The transceiver **1002** includes a transmitter **1004** and a receiver **1008**. Either the transmitter **1004** or the receiver **1008** can be implemented using a UFT module. Alternatively, the transmitter **1004** can be implemented using a UFT module **1006**, and the receiver **1008** can be implemented using a UFT module **1010**. This embodiment is shown in FIG. **10**.

Another transceiver embodiment according to the invention is shown in FIG. **11**. In this transceiver **1102**, the transmitter **1104** and the receiver **1108** are implemented using a single UFT module **1106**. In other words, the transmitter **1104** and the receiver **1108** share a UFT module **1106**.

As described elsewhere in this application, the invention is directed to methods and systems for enhanced signal reception (ESR). Various ESR embodiments include an ESR module (transmit) in a transmitter **1202**, and an ESR module (receive) in a receiver **1210**. An example ESR embodiment configured in this manner is illustrated in FIG. **12**.

The ESR module (transmit) **1204** includes a frequency up-conversion module **1206**. Some embodiments of this frequency up-conversion module **1206** may be implemented using a UFT module, such as that shown in FIG. **1**D.

The ESR module (receive) **1212** includes a frequency down-conversion module **1214**. Some embodiments of this frequency down-conversion module **1214** may be implemented using a UFT module, such as that shown in FIG. **1**C.

As described elsewhere in this application, the invention is directed to methods and systems for unified down-conversion and filtering (UDF). An example unified down-conversion and filtering module **1302** is illustrated in FIG. **13**. The unified down-conversion and filtering module **1302** includes a frequency down-conversion module **1304** and a filtering module **1306**. According to the invention, the frequency down-conversion module **1304** and the filtering module **1306** are implemented using a UFT module **1308**, as indicated in FIG. **13**.

Unified down-conversion and filtering according to the invention is useful in applications involving filtering and/or frequency down-conversion. This is depicted, for example, in FIGS. **15**A–**15**F. FIGS. **15**A–**15**C indicate that unified down-conversion and filtering according to the invention is useful in applications where filtering precedes, follows, or both precedes and follows frequency down-conversion. FIG. **15**D indicates that a unified down-conversion and filtering module **1524** according to the invention can be utilized as a filter **1522** (i.e., where the extent of frequency down-conversion by the down-converter in the unified down-conversion and filtering module **1524** is minimized). FIG. **15**E indicates that a unified down-conversion and filtering module **1528** according to the invention can be utilized as a down-converter **1526** (i.e., where the filter in the unified down-conversion and filtering module **1528** passes substantially all frequencies). FIG. **15**F illustrates that the unified down-conversion and filtering module **1532** can be used as an amplifier. It is noted that one or more UDF modules can be used in applications that involve at least one or more of filtering, frequency translation, and amplification.

For example, receivers, which typically perform filtering, down-conversion, and filtering operations, can be implemented using one or more unified down-conversion and filtering modules. This is illustrated, for example, in FIG. **14**.

The methods and systems of unified down-conversion and filtering of the invention have many other applications. For example, as discussed herein, the enhanced signal reception (ESR) module (receive) operates to down-convert a signal containing a plurality of spectrums. The ESR module (receive) also operates to isolate the spectrums in the down-converted signal, where such isolation is implemented via filtering in some embodiments. According to embodiments of the invention, the ESR module (receive) is implemented using one or more unified down-conversion and filtering (UDF) modules. This is illustrated, for example, in FIG. **16**. In the example of FIG. **16**, one or more of the UDF modules **1610**, **1612**, **1614** operates to down-convert a received signal. The UDF modules **1610**, **1612**, **1614** also operate to filter the down-converted signal so as to isolate the spectrum (s) contained therein. As noted above, the UDF modules **1610**, **1612**, **1614** are implemented using the universal frequency translation (UFT) modules of the invention.

The invention is not limited to the applications of the UFT module described above. For example, and without limitation, subsets of the applications (methods and/or structures) described herein (and others that would be apparent to persons skilled in the relevant art(s) based on the herein teachings) can be associated to form useful combinations.

For example, transmitters and receivers are two applications of the UFT module. FIG. **10** illustrates a transceiver **1002** that is formed by combining these two applications of the UFT module, i.e., by combining a transmitter **1004** with a receiver **1008**.

Also, ESR (enhanced signal reception) and unified down-conversion and filtering are two other applications of the

UFT module. FIG. **16** illustrates an example where ESR and unified down-conversion and filtering are combined to form a modified enhanced signal reception system.

The invention is not limited to the example applications of the UFT module discussed herein. Also, the invention is not limited to the example combinations of applications of the UFT module discussed herein. These examples were provided for illustrative purposes only, and are not limiting. Other applications and combinations of such applications will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. Such applications and combinations include, for example and without limitation, applications/combinations comprising and/or involving one or more of: (1) frequency translation; (2) frequency down-conversion; (3) frequency up-conversion; (4) receiving; (5) transmitting; (6) filtering; and/or (7) signal transmission and reception in environments containing potentially jamming signals.

Additional example applications are described below.

7. Universal Transmitter

The present invention is directed at a universal transmitter using, in embodiments, two or more UFT modules in a balanced vector modulator configuration. The universal transmitter can be used to create virtually every known and useful waveform used in analog and digital communications applications in wired and wireless markets. By appropriately selecting the inputs to the universal transmitter, a host of signals can be synthesized including but not limited to AM, FM, BPSK, QPSK, MSK, QAM, ODFM, multi-tone, and spread-spectrum signals (including CDMA and frequency hopping). As will be shown, the universal transmitter can up-convert these waveforms using less components than that seen with conventional super-hetrodyne approaches. In other words, the universal transmitter does not require multiple IF stages (having intermediate filtering) to up-convert complex waveforms that have demanding spectral growth requirements. The elimination of intermediate IF stages reduces part count in the transmitter and therefore leads to cost savings. As will be shown, the present invention achieves these savings without sacrificing performance.

Furthermore, the use of a balanced configuration means that carrier insertion can be attenuated or controlled during up-conversion of a baseband signal. Carrier insertion is caused by the variation of transmitter components (e.g. resistors, capacitors, etc.), which produces DC offset voltages throughout the transmitter. Any DC offset voltage gets up-converted, along with the baseband signal, and generates spectral energy (or carrier insertion) at the carrier frequency f_C. In many transmit applications, it is highly desirable to minimize the carrier insertion in an up-converted signal because the sideband(s) carry the baseband information and any carrier insertion is wasted energy that reduces efficiency.

FIGS. **25**A–B graphically illustrate carrier insertion in the context of up-converted signals that carry baseband information in the corresponding signal sidebands. FIG. **25**A depicts an up-converted signal **2502** having minimal carrier energy **2504** when compared to sidebands **2506***a* and **2506***b*. In these transmitter applications, the present invention can be configured to minimize carrier insertion by limiting the relative DC offset voltage that is present in the transmitter. Alternatively, some transmit applications require sufficient carrier insertion for coherent demodulation of the transmitted signal at the receiver. This illustrated by FIG. **25**B, which shows up-converted signal **2508** having carrier energy **2510** that is somewhat larger than sidebands **2512***a* and **2512***b*. In these applications, the present invention can be configured to introduce a DC offset voltage that generates the desired carrier insertion.

7.1 Universal Transmitter Having 2 UFT Modules

FIG. **26**A illustrates a transmitter **2602** according to embodiments of the present invention. Transmitter **2602** includes a balanced modulator/up-converter **2604**, a control signal generator **2642**, an optional filter **2606**, and an optional amplifier **2608**. Transmitter **2602** up-converts a baseband signal **2610** to produce an output signal **2640** that is conditioned for wireless or wire line transmission. In doing so, the balanced modulator **2604** receives the baseband signal **2610** and samples the baseband signal in a differential and balanced fashion to generate a harmonically rich signal **2638**. The harmonically rich signal **2638** includes multiple harmonic images, where each image contains the baseband information in the baseband signal **2610**. The optional bandpass filter **2606** may be included to select a harmonic of interest (or a subset of harmonics) in the signal **2558** for transmission. The optional amplifier **2608** may be included to amplify the selected harmonic prior to transmission. The universal transmitter is further described at a high level by the flowchart **6200** that is shown in FIG. **62**. A more detailed structural and operational description of the balanced modulator follows thereafter.

Referring to flowchart **6200**, in step **6202**, the balanced modulator **2604** receives the baseband signal **2610**.

In step **6204**, the balanced modulator **2604** samples the baseband signal in a differential and balanced fashion according to a first and second control signals that are phase shifted with respect to each other. The resulting harmonically rich signal **2638** includes multiple harmonic images that repeat at harmonics of the sampling frequency, where each image contains the necessary amplitude and frequency information to reconstruct the baseband signal **2610**.

In embodiments of the invention, the control signals include pulses having pulse widths (or apertures) that are established to improve energy transfer to a desired harmonic of the harmonically rich signal. In further embodiments of the invention, DC offset voltages are minimized between sampling modules as indicated in step **6206**, thereby minimizing carrier insertion in the harmonic images of the harmonically rich signal **2638**.

In step **6208**, the optional bandpass filter **2606** selects the desired harmonic of interest (or a subset of harmonics) in from the harmonically rich signal **2638** for transmission.

In step **6210**, the optional amplifier **2608** amplifies the selected harmonic(s) prior to transmission.

In step **6212**, the selected harmonic(s) is transmitted over a communications medium.

7.1.1 Balanced Modulator Detailed Description

Referring to the example embodiment shown in FIG. **26**A, the balanced modulator **2604** includes the following components: a buffer/inverter **2612**, summer amplifiers **2618**, **2619**; UFT modules **2624** and **2628** having controlled switches **2648** and **2650**, respectively; an inductor **2626**; a blocking capacitor **2636**; and a DC terminal **2611**. As stated above, the balanced modulator **2604** differentially samples the baseband signal **2610** to generate a harmonically rich signal **2638**. More specifically, the UFT modules **2624** and **2628** sample the baseband signal in differential fashion according to control signals **2623** and **2627**, respectively. A DC reference voltage **2613** is applied to terminal **2611** and is uniformly distributed to the UFT modules **2624** and **2628**. The distributed DC voltage **2613** prevents any DC offset voltages from developing between the UFT modules, which can lead to carrier insertion in the harmonically rich signal **2638** as described above. The operation of the balanced modulator **2604** is discussed in greater detail with reference to flowchart **6300** (FIG. **63**), as follows.

In step **6302**, the buffer/inverter **2612** receives the input baseband signal **2610** and generates input signal **2614** and inverted input signal **2616**. Input signal **2614** is substantially similar to signal **2610**, and inverted signal **2616** is an inverted version of signal **2614**. As such, the buffer/inverter **2612** converts the (single-ended) baseband signal **2610** into differential input signals **2614** and **2616** that will be sampled by the UFT modules. Buffer/inverter **2612** can be implemented using known operational amplifier (op amp) circuits, as will be understood by those skilled in the arts, although the invention is not limited to this example.

In step **6304**, the summer amplifier **2618** sums the DC reference voltage **2613** applied to terminal **2611** with the input signal **2614**, to generate a combined signal **2620**. Likewise, the summer amplifier **2619** sums the DC reference voltage **2613** with the inverted input signal **2616** to generate a combined signal **2622**. Summer amplifiers **2618** and **2619** can be implemented using known op amp summer circuits, and can be designed to have a specified gain or attenuation, including unity gain, although the invention is not limited to this example. The DC reference voltage **2613** is also distributed to the outputs of both UFT modules **2624** and **2628** through the inductor **2626** as is shown.

In step **6306**, the control signal generator **2642** generates control signals **2623** and **2627** that are shown by way of example in FIG. **27**B and FIG. **27**C, respectively. As illustrated, both control signals **2623** and **2627** have the same period T_S as a master clock signal **2645** (FIG. **27**A), but have a pulse width (or aperture) of T_A. In the example, control signal **2623** triggers on the rising pulse edge of the master clock signal **2645**, and control signal **2627** triggers on the falling pulse edge of the master clock signal **2645**. Therefore, control signals **2623** and **2627** are shifted in time by 180 degrees relative to each other. In embodiments of invention, the master clock signal **2645** (and therefore the control signals **2623** and **2627**) have a frequency that is a sub-harmonic of the desired output signal **2640**. The invention is not limited to the example of FIGS. **27**A–**27**C.

In one embodiment, the control signal generator **2642** includes an oscillator **2646**, pulse generators **2644***a* and **2644***b*, and an inverter **2647** as shown. In operation, the oscillator **2646** generates the master clock signal **2645**, which is illustrated in FIG. **27**A as a periodic square wave having pulses with a period of T_S. Other clock signals could be used including but not limited to sinusoidal waves, as will be understood by those skilled in the arts. Pulse generator **2644***a* receives the master clock signal **2645** and triggers on the rising pulse edge, to generate the control signal **2623**. Inverter **2647** inverts the clock signal **2645** to generate an inverted clock signal **2643**. The pulse generator **2644***b* receives the inverted clock signal **2643** and triggers on the rising pulse edge (which is the falling edge of clock signal **2645**), to generate the control signal **2627**.

FIGS. **74**A–E illustrate example embodiments for the pulse generator **2644**. FIG. **74**A illustrates a pulse generator **7402**. The pulse generator **7402** generates pulses **7408** having pulse width T_A from an input signal **7404**. Example input signals **7404** and pulses **7408** are depicted in FIGS. **74**B and **74**C, respectively. The input signal **7404** can be any type of periodic signal, including, but not limited to, a sinusoid, a square wave, a saw-tooth wave etc. The pulse width (or aperture) T_A of the pulses **7408** is determined by delay **7406** of the pulse generator **7402**. The pulse generator **7402** also includes an optional inverter **7410**, which is optionally added for polarity considerations as understood by those skilled in the arts. The example logic and implementation shown for the pulse generator **7402** is provided for illustrative purposes only, and is not limiting. The actual logic employed can take many forms. Additional examples of pulse generation logic are shown in FIGS. **74**D and **74**E. FIG. **74**D illustrates a rising edge pulse generator **7412** that triggers on the rising edge of input signal **7404**. FIG. **74**E illustrates a falling edge pulse generator **7416** that triggers on the falling edge of the input signal **7404**.

In step **6308**, the UFT module **2624** samples the combined signal **2620** according to the control signal **2623** to generate harmonically rich signal **2630**. More specifically, the switch **2648** closes during the pulse widths T_A of the control signal **2623** to sample the combined signal **2620** resulting in the harmonically rich signal **2630**. FIG. **26**B illustrates an exemplary frequency spectrum for the harmonically rich signal **2630** having harmonic images **2652***a–n*. The images **2652** repeat at harmonics of the sampling frequency $1/T_S$ at infinitum, where each image **2652** contains the necessary amplitude, frequency, and phase information to reconstruct the baseband signal **2610**. As discussed further below, the relative amplitude of the frequency images is generally a function of the harmonic number and the pulse width T_A. As such, the relative amplitude of a particular harmonic **2652** can be increased (or decreased) by adjusting the pulse width T_A of the control signal **2623**. In general, shorter pulse widths of T_A shift more energy into the higher frequency harmonics, and longer pulse widths of T_A shift energy into the lower frequency harmonics. The generation of harmonically rich signals by sampling an input signal according to a controlled aperture have been described earlier in this application in the section titled, "Frequency Up-conversion Using Universal Frequency Translation", and is illustrated by FIGS. **3**–**6**. A more detailed discussion of frequency up-conversion using a switch with a controlled sampling aperture is discussed in the co-pending patent application titled, "Method and System for Frequency Up-Conversion," Ser. No. 09/176,154, field on Oct. 21, 1998, and incorporated herein by reference.

In step **6310**, the UFT module **2628** samples the combined signal **2622** according to the control signal **2627** to generate harmonically rich signal **2634**. More specifically, the switch **2650** closes during the pulse widths T_A of the control signal **2627** to sample the combined signal **2622** resulting in the harmonically rich signal **2634**. The harmonically rich signal **2634** includes multiple frequency images of baseband signal **2610** that repeat at harmonics of the sampling frequency ($1/T_S$), similar to that for the harmonically rich signal **2630**. However, the images in the signal **2634** are phase-shifted compared to those in signal **2630** because of the inversion of signal **2616** compared to signal **2614**, and because of the relative phase shift between the control signals **2623** and **2627**.

In step **6312**, the node **2632** sums the harmonically rich signals **2632** and **2634** to generate harmonically rich signal **2633**. FIG. **26**C illustrates an exemplary frequency spectrum for the harmonically rich signal **2633** that has multiple images **2654***a–n* that repeat at harmonics of the sampling frequency $1/T_S$. Each image **2654** includes the necessary amplitude, frequency and phase information to reconstruct the baseband signal **2610**. The capacitor **2636** operates as a DC blocking capacitor and substantially passes the harmonics in the harmonically rich signal **2633** to generate harmonically rich signal **2638** at the output of the modulator **2604**.

In step **6208**, the optional filter **2606** can be used to select a desired harmonic image for transmission. This is represented for example by a passband **2656** that selects the harmonic image **2654***c* for transmission in FIG. **26**C.

An advantage of the modulator **2604** is that it is fully balanced, which substantially minimizes (or eliminates) any DC voltage offset between the two UFT modules **2624** and **2628**. DC offset is minimized because the reference voltage **2613** contributes a consistent DC component to the input signals **2620** and **2622** through the summing amplifiers **2618** and **2619**, respectively. Furthermore, the reference voltage **2613** is also directly coupled to the outputs of the UFT modules **2624** and **2628** through the inductor **2626** and the node **2632**. The result of controlling the DC offset between the UFT modules is that carrier insertion is minimized in the harmonic images of the harmonically rich signal **2638**. As discussed above, carrier insertion is substantially wasted energy because the information for a modulated signal is carried in the sidebands of the modulated signal and not in the carrier. Therefore, it is often desirable to minimize the energy at the carrier frequency by controlling the relative DC offset.

7.1.2 Balanced Modulator Example Signal Diagrams and Mathematical Description

In order to further describe the invention, FIGS. **27**D–**27**I illustrate various example signal diagrams (vs. time) that are representative of the invention. These signal diagrams are meant for example purposes only and are not meant to be limiting.

FIG. **27**D illustrates a signal **2702** that is representative of the input baseband signal **2610** (FIG. **26**A). FIG. **27**E illustrates a step function **2704** that is an expanded portion of the signal **2702** from time t_0 to t_1, and represents signal **2614** at the output of the buffer/inverter **2612**. Similarly, FIG. **27**F illustrates a signal **2706** that is an inverted version of the signal **2704**, and represents the signal **2616** at the inverted output of buffer/inverter **2612**. For analysis purposes, a step function is a good approximation for a portion of a single bit of data (for the baseband signal **2610**) because the clock rates of the control signals **2623** and **2627** are significantly higher than the data rates of the baseband signal **2610**. For example, if the data rate is in the KHz frequency range, then the clock rate will preferably be in MHZ frequency range in order to generate an output signal in the Ghz frequency range.

Still referring to FIGS. **27**D–I, FIG. **27**G illustrates a signal **2708** that an example of the harmonically rich signal **2630** when the step function **2704** is sampled according to the control signal **2623** in FIG. **27**B. The signal **2708** includes positive pulses **2709** as referenced to the DC voltage **2613**. Likewise, FIG. **27**H illustrates a signal **2710** that is an example of the harmonically rich signal **2634** when the step function **2706** is sampled according to the control signal **2627**. The signal **2710** includes negative pulses **2711** as referenced to the DC voltage **2613**, which are time-shifted relative the positive pulses **2709** in signal **2708**.

Still referring to FIGS. **27**D–I, the FIG. **271** illustrates a signal **2712** that is the combination of signal **2708** (FIG. **27**G) and the signal **2710** (FIG. **27**H), and is an example of the harmonically rich signal **2633** at the output of the summing node **2632**. As illustrated, the signal **2712** spends approximately as much time above the DC reference voltage **2613** as below the DC reference voltage **2613** over a limited time period. For example, over a time period **2714**, the energy in the positive pulses **2709***a–b* is canceled out by the energy in the negative pulses **2711***a–b*. This is indicative of minimal (or zero) DC offset between the UFT modules **2624** and **2628**, which results in minimal carrier insertion during the sampling process.

Still referring to FIG. **27**I, the time axis of the signal **2712** can be phased in such a manner to represent the waveform as an odd function. For such an arrangement, the Fourier series is readily calculated to obtain:

$$I_c(t) = \sum_{n=1}^{\infty} \left(\frac{4\sin\left(\frac{n\pi T_A}{T_s}\right) \cdot \sin\left(\frac{n\pi}{2}\right)}{n\pi} \right) \cdot \sin\left(\frac{2n\pi t}{T_s}\right). \quad \text{Equation 1}$$

where: T_S=period of the master clock **2645**

T_A=pulse width of the control signals **2623** and **2627**

n=harmonic number

As shown by Equation 1, the relative amplitude of the frequency images is generally a function of the harmonic number n, and the ratio of T_A/T_S. As indicated, the T_A/T_S ratio represents the ratio of the pulse width of the control signals relative to the period of the sub-harmonic master clock. The T_A/T_S ratio can be optimized in order to maximize the amplitude of the frequency image at a given harmonic. For example, if a passband waveform is desired to be created at 5× the frequency of the sub-harmonic clock, then a baseline power for that harmonic extraction may be calculated for the fifth harmonic (n=5) as:

$$I_c(t) = \left(\frac{4\sin\left(\frac{5\pi T_A}{T_s}\right)}{5\pi} \right) \cdot \sin(5\omega_s t). \quad \text{Equation 2}$$

As shown by Equation 2, $I_C(t)$ for the fifth harmonic is a sinusoidal function having an amplitude that is proportional to the $\sin(5\pi T_A/T_S)$. The signal amplitude can be maximized by setting $T_A=(1/10 \cdot T_S)$ so that $\sin(5\pi T_A/T_S)=\sin(\pi/2)=1$. Doing so results in the equation:

$$I_c(t)|_{n=5} = \frac{4}{5\pi}(\sin(5\omega_s t)). \quad \text{Equation 3}$$

This component is a frequency at 5× of the sampling frequency of sub-harmonic clock, and can be extracted from the Fourier series via a bandpass filter (such as bandpass filter **2606**) that is centered around $5f_S$. The extracted frequency component can then be optionally amplified by the amplifier **2608** prior to transmission on a wireless or wire-line communications channel or channels.

Equation 3 can be extended to reflect the inclusion of a message signal as illustrated by equation 4 below:

$$m(t) \cdot I_c(t)|_{\theta=\theta(t)}^{n=5} = \frac{4 \cdot m(t)}{5\pi}(\sin(5\omega_s t + 5\theta(t))). \quad \text{Equation 4}$$

Equation 4 illustrates that a message signal can be carried in harmonically rich signals **2633** such that both amplitude and phase can be modulated. In other words, m(t) is modulated for amplitude and θ(t) is modulated for phase. In such cases, it should be noted that θ(t) is augmented modulo n while the amplitude modulation m(t) is simply scaled. Therefore, complex waveforms may be reconstructed from their Fourier series with multiple aperture UFT combinations.

As discussed above, the signal amplitude for the 5th harmonic was maximized by setting the sampling aperture width $T_A=1/10\ T_S$, where T_S is the period of the master clock signal. This can be restated and generalized as setting $T_A=1/2$ the period (or π radians) at the harmonic of interest. In other words, the signal amplitude of any harmonic n can be maximized by sampling the input waveform with a sampling aperture of $T_A=1/2$the period of the harmonic of interest (n).

Based on this discussion, it is apparent that varying the aperture changes the harmonic and amplitude content of the output waveform. For example, if the sub-harmonic clock has a frequency of 200 MHZ, then the fifth harmonic is at 1 Ghz. The amplitude of the fifth harmonic is maximized by setting the aperture width T_A=500 picoseconds, which equates to ½ the period (or π radians) at 1 Ghz.

FIG. **27**J depicts a frequency plot **2716** that graphically illustrates the effect of varying the sampling aperture of the control signals on the harmonically rich signal **2633** given a 200 MHZ harmonic clock. The frequency plot **2716** compares two frequency spectrums **2718** and **2720** for different control signal apertures given a 200 MHZ clock. More specifically, the frequency spectrum **2718** is an example spectrum for signal **2633** given the 200 MHZ clock with the aperture T_A=500 psec (where 500 psec is π radians at the 5th harmonic of 1 GHz). Similarly, the frequency spectrum **2720** is an example spectrum for signal **2633** given a 200 MHZ clock that is a square wave (so T_A=5000 psec). The spectrum **2718** includes multiple harmonics **2718***a–i*, and the frequency spectrum **2720** includes multiple harmonics **2720***a–e*. [It is noted that spectrum **2720** includes only the odd harmonics as predicted by Fourier analysis for a square wave.] At 1 Ghz (which is the 5th harmonic), the signal amplitude of the two frequency spectrums **2718***e* and **2720***c* are approximately equal. However, at 200 MHZ, the frequency spectrum **2718***a* has a much lower amplitude than the frequency spectrum **2720***a*, and therefore the frequency spectrum **2718** is more efficient than the frequency spectrum **2720**, assuming the desired harmonic is the 5th harmonic. In other words, assuming 1 Ghz is the desired harmonic, the frequency spectrum **2718** wastes less energy at the 200 MHZ fundamental than does the frequency spectrum **2718**.

7.1.3 Balanced Modulator Having a Shunt Configuration

FIG. **56**A illustrates a universal transmitter **5600** that is a second embodiment of a universal transmitter having two balanced UFT modules in a shunt configuration. (In contrast, the balanced modulator **2604** can be described as having a series configuration based on the orientation of the UFT modules.) Transmitter **5600** includes a balanced modulator **5601**, the control signal generator **2642**, the optional bandpass filter **2606**, and the optional amplifier **2608**. The transmitter **5600** up-converts a baseband signal **5602** to produce an output signal **5636** that is conditioned for wireless or wire line transmission. In doing so, the balanced modulator **5601** receives the baseband signal **5602** and shunts the baseband signal to ground in a differential and balanced fashion to generate a harmonically rich signal **5634**. The harmonically rich signal **5634** includes multiple harmonic images, where each image contains the baseband information in the baseband signal **5602**. In other words, each harmonic image includes the necessary amplitude, frequency, and phase information to reconstruct the baseband signal **5602**. The optional bandpass filter **2606** may be included to select a harmonic of interest (or a subset of harmonics) in the signal **5634** for transmission. The optional amplifier **2608** may be included to amplify the selected harmonic prior to transmission, resulting in the output signal **5636**.

The balanced modulator **5601** includes the following components: a buffer/inverter **5604**; optional impedances **5610**, **5612**; UFT modules **5616** and **5622** having controlled switches **5618** and **5624**, respectively; blocking capacitors **5628** and **5630**; and a terminal **5620** that is tied to ground. As stated above, the balanced modulator **5601** differentially shunts the baseband signal **5602** to ground, resulting in a harmonically rich signal **5634**. More specifically, the UFT modules **5616** and **5622** alternately shunts the baseband signal to terminal **5620** according to control signals **2623** and **2627**, respectively. Terminal **5620** is tied to ground and prevents any DC offset voltages from developing between the UFT modules **5616** and **5622**. As described above, a DC offset voltage can lead to undesired carrier insertion. The operation of the balanced modulator **5601** is described in greater detail according to the flowchart **6400** (FIG. **64**) as follows.

In step **6402**, the buffer/inverter **5604** receives the input baseband signal **5602** and generates I signal **5606** and inverted I signal **5608**. I signal **5606** is substantially similar to the baseband signal **5602**, and the inverted I signal **5608** is an inverted version of signal **5602**. As such, the buffer/inverter **5604** converts the (single-ended) baseband signal **5602** into differential signals **5606** and **5608** that are sampled by the UFT modules. Buffer/inverter **5604** can be implemented using known operational amplifier (op amp) circuits, as will be understood by those skilled in the arts, although the invention is not limited to this example.

In step **6404**, the control signal generator **2642** generates control signals **2623** and **2627** from the master clock signal **2645**. Examples of the master clock signal **2645**, control signal **2623**, and control signal **2627** are shown in FIGS. **27**A–C, respectively. As illustrated, both control signals **2623** and **2627** have the same period T_S as a master clock signal **2645**, but have a pulse width (or aperture) of T_A. Control signal **2623** triggers on the rising pulse edge of the master clock signal **2645**, and control signal **2627** triggers on the falling pulse edge of the master clock signal **2645**. Therefore, control signals **2623** and **2627** are shifted in time by 180 degrees relative to each other. A specific embodiment of the control signal generator **2642** is illustrated in FIG. **26**A, and was discussed in detail above.

In step **6406**, the UFT module **5616** shunts the signal **5606** to ground according to the control signal **2623**, to generate a harmonically rich signal **5614**. More specifically, the switch **5618** closes and shorts the signal **5606** to ground (at terminal **5620**) during the aperture width T_A of the control signal **2623**, to generate the harmonically rich signal **5614**. FIG. **56**B illustrates an exemplary frequency spectrum for the harmonically rich signal **5618** having harmonic images **5650***a–n*. The images **5650** repeat at harmonics of the sampling frequency $1/T_S$, at infinitum, where each image **5650** contains the necessary amplitude, frequency, and phase information to reconstruct the baseband signal **5602**. The generation of harmonically rich signals by sampling an input signal according to a controlled aperture have been described earlier in this application in the section titled, "Frequency Up-conversion Using Universal Frequency Translation", and is illustrated by FIGS. **3**–**6**. A more detailed discussion of frequency up-conversion using a switch with a controlled sampling aperture is discussed in the co-pending patent application titled, "Method and System for Frequency Up-Conversion," Ser. No. 09/176,154, field on Oct. 21, 1998, and incorporated herein by reference.

The relative amplitude of the frequency images **5650** is generally a function of the harmonic number and the pulse width T_A. As such, the relative amplitude of a particular harmonic **5650** can be increased (or decreased) by adjusting the pulse width T_A of the control signal **2623**. In general, shorter pulse widths of T_A shift more energy into the higher frequency harmonics, and longer pulse widths of T_A shift energy into the lower frequency harmonics. Additionally, the relative amplitude of a particular harmonic **5650** can also be adjusted by adding/tuning an optional impedance **5610**. Impedance **5610** operates as a filter that emphasizes a particular harmonic in the harmonically rich signal **5614**.

In step **6408**, the UFT module **5622** shunts the inverted signal **5608** to ground according to the control signal **2627**, to generate a harmonically rich signal **5626**. More specifically, the switch **5624** closes during the pulse widths T_A and shorts the inverted I signal **5608** to ground (at terminal **5620**), to generate the harmonically rich signal **5626**. At any given time, only one of input signals **5606** or **5608** is shorted to ground because the pulses in the control signals **2623** and **2627** are phase shifted with respect to each other, as shown in FIGS. **27**B and **27**C.

The harmonically rich signal **5626** includes multiple frequency images of baseband signal **5602** that repeat at harmonics of the sampling frequency ($1/T_S$), similar to that for the harmonically rich signal **5614**. However, the images in the signal **5626** are phase-shifted compared to those in signal **5614** because of the inversion of the signal **5608** compared to the signal **5606**, and because of the relative phase shift between the control signals **2623** and **2627**. The optional impedance **5612** can be included to emphasis a particular harmonic of interest, and is similar to the impedance **5610** above.

In step **6410**, the node **5632** sums the harmonically rich signals **5614** and **5626** to generate the harmonically rich signal **5634**. The capacitors **5628** and **5630** operate as blocking capacitors that substantially pass the respective harmonically rich signals **5614** and **5626** to the node **5632**. (The capacitor values may be chosen to substantially block baseband frequency components as well.) FIG. **56**C illustrates an exemplary frequency spectrum for the harmonically rich signal **5634** that has multiple images **5652***a–n* that repeat at harmonics of the sampling frequency I/Ts. Each image **5652** includes the necessary amplitude, frequency, and phase information to reconstruct the baseband signal **5602**. The optional filter **2606** can be used to select the harmonic image of interest for transmission. This is represented by a passband **5656** that selects the harmonic image **5632***c* for transmission.

An advantage of the modulator **5601** is that it is fully balanced, which substantially minimizes (or eliminates) any DC voltage offset between the two UFT modules **5612** and **5614**. DC offset is minimized because the UFT modules **5616** and **5622** are both connected to ground at terminal **5620**. The result of controlling the DC offset between the UFT modules is that carrier insertion is minimized in the harmonic images of the harmonically rich signal **5634**. As discussed above, carrier insertion is substantially wasted energy because the information for a modulated signal is carried in the sidebands of the modulated signal and not in the carrier. Therefore, it is often desirable to minimize the energy at the carrier frequency by controlling the relative DC offset.

7.1.4 Balanced Modulator FET Configuration

As described above, the balanced modulators **2604** and **5601** utilize two balanced UFT modules to sample the input baseband signals to generate harmonically rich signals that contain the up-converted baseband information. More specifically, the UFT modules include controlled switches that sample the baseband signal in a balanced and differential fashion. FIGS. **26**D and **56**D illustrate embodiments of the controlled switch in the UFT module.

FIG. **26**D illustrates an example embodiment of the modulator **2604** (FIG. **26**B) where the controlled switches in the UFT modules are field effect transistors (FET). More specifically, the controlled switches **2648** and **2628** are embodied as FET **2658** and FET **2660**, respectively. The FET **2658** and **2660** are oriented so that their gates are controlled by the control signals **2623** and **2627**, so that the control signals control the FET conductance. For the FET **2658**, the combined baseband signal **2620** is received at the source of the FET **2658** and is sampled according to the control signal **2623** to produce the harmonically rich signal **2630** at the drain of the FET **2658**. Likewise, the combined baseband signal **2622** is received at the source of the FET **2660** and is sampled according to the control signal **2627** to produce the harmonically rich signal **2634** at the drain of FET **2660**. The source and drain orientation that is illustrated is not limiting, as the source and drains can be switched for most FETs. In other words, the combined baseband signal can be received at the drain of the FETs, and the harmonically rich signals can be taken from the source of the FETs, as will be understood by those skilled in the relevant arts.

FIG. **56**D illustrates an embodiment of the modulator **5600** (FIG. **56**) where the controlled switches in the UFT modules are field effect transistors (FET). More specifically, the controlled switches **5618** and **5624** are embodied as FET **5636** and FET **5638**, respectively. The FETs **5636** and **5638** are oriented so that their gates are controlled by the control signals **2623** and **2627**, respectively, so that the control signals determine FET conductance. For the FET **5636**, the baseband signal **5606** is received at the source of the FET **5636** and shunted to ground according to the control signal **2623**, to produce the harmonically rich signal **5614**. Likewise, the baseband signal **5608** is received at the source of the FET **5638** and is shunted to grounding according to the control signal **2627**, to produce the harmonically rich signal **5626**. The source and drain orientation that is illustrated is not limiting, as the source and drains can be switched for most FETs, as will be understood by those skilled in the relevant arts.

7.1.5 Universal Transmitter Configured for Carrier Insertion

As discussed above, the transmitters **2602** and **5600** have a balanced configuration that substantially eliminates any DC offset and results in minimal carrier insertion in the output signal **2640**. Minimal carrier insertion is generally desired for most applications because the carrier signal carries no information and reduces the overall transmitter efficiency. However, some applications require the received signal to have sufficient carrier energy for the receiver to extract the carrier for coherent demodulation. In support thereof, the present invention can be configured to provide the necessary carrier insertion by implementing a DC offset between the two sampling UFT modules.

FIG. **28**A illustrates a transmitter **2802** that up-converts a baseband signal **2806** to an output signal **2822** having carrier insertion. As is shown, the transmitter **2802** is similar to the transmitter **2602** (FIG. **26**A) with the exception that the up-converter/modulator **2804** is configured to accept two DC references voltages. In contrast, modulator **2604** was configured to accept only one DC reference voltage. More specifically, the modulator **2804** includes a terminal **2809** to accept a DC reference voltage **2808**, and a terminal **2813** to accept a DC reference voltage **2814**. Vr **2808** appears at the UFT module **2624** though summer amplifier **2618** and the inductor **2810**. Vr **2814** appears at UFT module **2628** through the summer amplifier **2619** and the inductor **2816**. Capacitors **2812** and **2818** operate as blocking capacitors. If Vr **2808** is different from Vr **2814** then a DC offset voltage will be exist between UFT module **2624** and UFT module **2628**, which will be up-converted at the carrier frequency in the harmonically rich signal **2820**. More specifically, each harmonic image in the harmonically rich signal **2820** will include a carrier signal as depicted in FIG. **28**B.

FIG. **28**B illustrates an exemplary frequency spectrum for the harmonically rich signal **2820** that has multiple harmonic

images **2824***a–n*. In addition to carrying the baseband information in the sidebands, each harmonic image **2824** also includes a carrier signal **2826** that exists at respective harmonic of the sampling frequency $1/T_S$. The amplitude of the carrier signal increases with increasing DC offset voltage. Therefore, as the difference between Vr **2808** and Vr **2814** widens, the amplitude of each carrier signal **2826** increases. Likewise, as the difference between Vr **2808** and Vr **2814** shrinks, the amplitude of each carrier signal **2826** shrinks. As with transmitter **2802**, the optional bandpass filter **2606** can be included to select a desired harmonic image for transmission. This is represented by passband **2828** in FIG. **28**B.

7.2 Universal Transmitter in I Q Configuration:

As described above, the balanced modulators **2604** and **5601** up-convert a baseband signal to a harmonically rich signal having multiple harmonic images of the baseband information. By combining two balanced modulators, IQ configurations can be formed for up-converting I and Q baseband signals. In doing so, either the (series type) balanced modulator **2604** or the (shunt type) balanced modulator can be utilized. IQ modulators having both series and shunt configurations are described below.

7.2.1 IQ Transmitter Using Series-Type Balanced Modulator

FIG. **29** illustrates an IQ transmitter **2920** with an in-phase (I) and quadrature (Q) configuration according to embodiments of the invention. The transmitter **2920** includes an IQ balanced modulator **2910**, an optional filter **2914**, and an optional amplifier **2916**. The transmitter **2920** is useful for transmitting complex I Q waveforms and does so in a balanced manner to control DC offset and carrier insertion. In doing so, the modulator **2910** receives an I baseband signal **2902** and a Q baseband signal **2904** and up-converts these signals to generate a combined harmonically rich signal **2912**. The harmonically rich signal **2912** includes multiple harmonics images, where each image contains the baseband information in the I signal **2902** and the Q signal **2904**. The optional bandpass filter **2914** may be included to select a harmonic of interest (or subset of harmonics) from the signal **2912** for transmission. The optional amplifier **2916** may be included to amplify the selected harmonic prior to transmission, to generate the IQ output signal **2918**.

As stated above, the balanced IQ modulator **2910** up-converts the I baseband signal **2902** and the Q baseband signal **2904** in a balanced manner to generate the combined harmonically rich signal **2912** that carriers the I and Q baseband information. To do so, the modulator **2910** utilizes two balanced modulators **2604** from FIG. **26**A, a signal combiner **2908**, and a DC terminal **2907**. The operation of the balanced modulator **2910** and other circuits in the transmitter is described according to the flowchart **6500** in FIG. **65**, as follows.

In step **6502**, the IQ modulator **2910** receives the I baseband signal **2902** and the Q baseband signal **2904**.

In step **6504**, the I balanced modulator **2604***a* samples the I baseband signal **2902** in a differential fashion using the control signals **2623** and **2627** to generate a harmonically rich signal **2911***a*. The harmonically rich signal **2911***a* contains multiple harmonic images of the I baseband information, similar to the harmonically rich signal **2630** in FIG. **26**B.

In step **6506**, the balanced modulator **2604***b* samples the Q baseband signal **2904** in a differential fashion using control signals **2623** and **2627** to generate harmonically rich signal **2911***b*, where the harmonically rich signal **2911***b* contains multiple harmonic images of the Q baseband signal **2904**. The operation of the balanced modulator **2604** and the generation of harmonically rich signals was fully described above and illustrated in FIGS. **26**A–C, to which the reader is referred for further details.

In step **6508**, the DC terminal **2907** receives a DC voltage **2906** that is distributed to both modulators **2604***a* and **2604***b*. The DC voltage **2906** is distributed to both the input and output of both UFT modules **2624** and **2628** in each modulator **2604**. This minimizes (or prevents) DC offset voltages from developing between the four UFT modules, and thereby minimizes or prevents any carrier insertion during the sampling steps **6504** and **6506**.

In step **6510**, the 90 degree signal combiner **2908** combines the harmonically rich signals **2911***a* and **2911***b* to generate IQ harmonically rich signal **2912**. This is further illustrated in FIGS. **30**A–C. FIG. **30**A depicts an exemplary frequency spectrum for the harmonically rich signal **2911***a* having harmonic images **3002***a–n*. The images **3002** repeat at harmonics of the sampling frequency $1/T_S$, where each image **3002** contains the necessary amplitude and frequency information to reconstruct the I baseband signal **2902**. Likewise, FIG. **30**B depicts an exemplary frequency spectrum for the harmonically rich signal **2911***b* having harmonic images **3004***a–n*. The harmonic images **3004***a–n* also repeat at harmonics of the sampling frequency $1/T_S$, where each image **3004** contains the necessary amplitude, frequency, and phase information to reconstruct the Q baseband signal **2904**. FIG. **30**C illustrates an exemplary frequency spectrum for the combined harmonically rich signal **2912** having images **3006**. Each image **3006** carries the I baseband information and the Q baseband information from the corresponding images **3002** and **3004**, respectively, without substantially increasing the frequency bandwidth occupied by each harmonic **3006**. This can occur because the signal combiner **2908** phase shifts the Q signal **2911***b* by 90 degrees relative to the I signal **2911***a*. The result is that the images **3002***a–n* and **3004***a–n* effectively share the signal bandwidth do to their orthogonal relationship. For example, the images **3002***a* and **3004***a* effectively share the frequency spectrum that is represented by the image **3006***a*.

In step **6512**, the optional filter **2914** can be included to select a harmonic of interest, as represented by the passband **3008** selecting the image **3006***c* in FIG. **30***c*.

In step **6514**, the optional amplifier **2916** can be included to amplify the harmonic (or harmonics) of interest prior to transmission.

In step **6516**, the selected harmonic (or harmonics) is transmitted over a communications medium.

FIG. **31**A illustrates a transmitter **3108** that is a second embodiment for an I Q transmitter having a balanced configuration. Transmitter **3108** is similar to the transmitter **2920** except that the 90 degree phase shift between the I and Q channels is achieved by phase shifting the control signals instead of using a 90 degree signal combiner to combine the harmonically rich signals. More specifically, delays **3104***a* and **3104***b* delay the control signals **2623** and **2627** for the Q channel modulator **2604***b* by 90 degrees relative the control signals for the I channel modulator **2604***a*. As a result, the Q modulator **2604***b* samples the Q baseband signal **2904** with 90 degree delay relative to the sampling of the I baseband signal **2902** by the I channel modulator **2604***a*. Therefore, the Q harmonically rich signal **2911***b* is phase shifted by 90 degrees relative to the I harmonically rich signal. Since the phase shift is achieved using the control signals, an in-phase signal combiner **3106** combines the harmonically rich signals **2911***a* and **2911***b*, to generate the harmonically rich signal **2912**.

FIG. **31**B illustrates a transmitter **3118** that is similar to transmitter **3108** in FIG. **31**A. The difference being that the transmitter **3118** has a modulator **3120** that utilizes a summing node **3122** to sum the signals **2911***a* and **2911***b* instead of the in-phase signal combiner **3106** that is used in modulator **3102** of transmitter **3108**.

FIGS. **55**A–**55**D illustrate various detailed circuit implementations of the transmitter **2920** in FIG. **29**. These circuit implementations are meant for example purposes only, and are not meant to be limiting.

FIG. **55**A illustrates I input circuitry **5502***a* and Q input circuitry **5502***b* that receive the I and Q input signals **2902** and **2904**, respectively.

FIG. **55**B illustrates the I channel circuitry **5506** that processes an I data **5504***a* from the I input circuit **5502***a*.

FIG. **55**C illustrates the Q channel circuitry **5508** that processes the Q data **5504***b* from the Q input circuit **5502***b*.

FIG. **55**D illustrates the output combiner circuit **5512** that combines the I channel data **5507** and the Q channel data **5510** to generate the output signal **2918**.

7.2.2 IQ Transmitter Using Shunt-Type Balanced Modulator

FIG. **57** illustrates an IQ transmitter **5700** that is another IQ transmitter embodiment according to the present invention. The transmitter **5700** includes an IQ balanced modulator **5701**, an optional filter **5712**, and an optional amplifier **5714**. During operation, the modulator **5701** up-converts an I baseband signal **5702** and a Q baseband signal **5704** to generate a combined harmonically rich signal **5711**. The harmonically rich signal **5711** includes multiple harmonics images, where each image contains the baseband information in the I signal **5702** and the Q signal **5704**. The optional bandpass filter **5712** may be included to select a harmonic of interest (or subset of harmonics) from the harmonically rich signal **5711** for transmission. The optional amplifier **5714** may be included to amplify the selected harmonic prior to transmission, to generate the IQ output signal **5716**.

The IQ modulator **5701** includes two balanced modulators **5601** from FIG. **56**, and a 90 degree signal combiner **5710** as shown. The operation of the IQ modulator **5701** is described in reference to the flowchart **6600** (FIG. **66**), as follows. The order of the steps in flowchart **6600** is not limiting.

In step **6602**, the balanced modulator **5701** receives the I baseband signal **5702** and the Q baseband signal **5704**.

In step **6604**, the balanced modulator **5601***a* differentially shunts the I baseband signal **5702** to ground according the control signals **2623** and **2627**, to generate a harmonically rich signal **5706**. More specifically, the UFT modules **5616***a* and **5622***a* alternately shunt the I baseband signal and an inverted version of the I baseband signal to ground according to the control signals **2623** and **2627**, respectively. The operation of the balanced modulator **5601** and the generation of harmonically rich signals was fully described above and is illustrated in FIGS. **56**A–C, to which the reader is referred for further details. As such, the harmonically rich signal **5706** contains multiple harmonic images of the I baseband information as described above.

In step **6606**, the balanced modulator **5601***b* differentially shunts the Q baseband signal **5704** to ground according to control signals **2623** and **2627**, to generate harmonically rich signal **5708**. More specifically, the UFT modules **5616***b* and **5622***b* alternately shunt the Q baseband signal and an inverted version of the Q baseband signal to ground, according to the control signals **2623** and **2627**, respectively. As such, the harmonically rich signal **5708** contains multiple harmonic images that contain the Q baseband information.

In step **6608**, the 90 degree signal combiner **5710** combines the harmonically rich signals **5706** and **5708** to generate IQ harmonically rich signal **5711**. This is further illustrated in FIGS. **58**A–C. FIG. **58**A depicts an exemplary frequency spectrum for the harmonically rich signal **5706** having harmonic images **5802***a–n*. The harmonic images **5802** repeat at harmonics of the sampling frequency $1/T_S$, where each image **5802** contains the necessary amplitude, frequency, and phase information to reconstruct the I baseband signal **5702**. Likewise, FIG. **58**B depicts an exemplary frequency spectrum for the harmonically rich signal **5708** having harmonic images **5804***a–n*. The harmonic images **5804***a–n* also repeat at harmonics of the sampling frequency $1/T_S$, where each image **5804** contains the necessary amplitude, frequency, and phase information to reconstruct the Q baseband signal **5704**. FIG. **58**C illustrates an exemplary frequency spectrum for the IQ harmonically rich signal **5711** having images **5806***a–n*. Each image **5806** carries the I baseband information and the Q baseband information from the corresponding images **5802** and **5804**, respectively, without substantially increasing the frequency bandwidth occupied by each image **5806**. This can occur because the signal combiner **5710** phase shifts the Q signal **5708** by 90 degrees relative to the I signal **5706**.

Inn step **6610**, the optional filter **5712** may be included to select a harmonic of interest, as represented by the passband **5808** selecting the image **5806***c* in FIG. **58**C.

In step **6612**, the optional amplifier **5714** can be included to amplify the selected harmonic image **5806** prior to transmission.

In step **6614**, the selected harmonic (or harmonics) is transmitted over a communications medium.

FIG. **59** illustrates a transmitter **5900** that is another embodiment for an I Q transmitter having a balanced configuration. Transmitter **5900** is similar to the transmitter **5700** except that the 90 degree phase shift between the I and Q channels is achieved by phase shifting the control signals instead of using a 90 degree signal combiner to combine the harmonically rich signals. More specifically, delays **5904***a* and **5904***b* delay the control signals **2623** and **2627** for the Q channel modulator **5601***b* by 90 degrees relative the control signals for the I channel modulator **5601***a*. As a result, the Q modulator **5601***b* samples the Q baseband signal **5704** with a 90 degree delay relative to the sampling of the I baseband signal **5702** by the I channel modulator **5601***a*. Therefore, the Q harmonically rich signal **5708** is phase shifted by 90 degrees relative to the I harmonically rich signal **5706**. Since the phase shift is achieved using the control signals, an in-phase signal combiner **5906** combines the harmonically rich signals **5706** and **5708**, to generate the harmonically rich signal **5711**.

FIG. **60** illustrates a transmitter **6000** that is similar to transmitter **5900** in FIG. **59**. The difference being that the transmitter **6000** has a balanced modulator **6002** that utilizes a summing node **6004** to sum the I harmonically rich signal **5706** and the Q harmonically rich signal **5708** instead of the in-phase signal combiner **5906** that is used in the modulator **5902** of transmitter **5900**. The 90 degree phase shift between the I and Q channels is implemented by delaying the Q clock signals using 90 degree delays **5904**, as shown.

7.2.3 IQ Transmitters Configured for Carrier Insertion

The transmitters **2920** (FIG. **29**) and **3108** (FIG. **31**A) have a balanced configuration that substantially eliminates any DC offset and results in minimal carrier insertion in the IQ output signal **2918**. Minimal carrier insertion is generally desired for most applications because the carrier signal carries no information and reduces the overall transmitter

efficiency. However, some applications require the received signal to have sufficient carrier energy for the receiver to extract the carrier for coherent demodulation. In support thereof, FIG. **32** illustrates a transmitter **3202** to provide any necessary carrier insertion by implementing a DC offset between the two sets of sampling UFT modules.

Transmitter **3202** is similar to the transmitter **2920** with the exception that a modulator **3204** in transmitter **3202** is configured to accept two DC reference voltages so that the I channel modulator **2604***a* can be biased separately from the Q channel modulator **2604***b*. More specifically, modulator **3204** includes a terminal **3206** to accept a DC voltage reference **3207**, and a terminal **3208** to accept a DC voltage reference **3209**. Voltage **3207** biases the UFT modules **2624***a* and **2628***a* in the I channel modulator **2604***a*. Likewise, voltage **3209** biases the UFT modules **2624***b* and **2628***b* in the Q channel modulator **2604***b*. When voltage **3207** is different from voltage **3209**, then a DC offset will appear between the I channel modulator **2604***a* and the Q channel modulator **2604***b*, which results in carrier insertion in the IQ harmonically rich signal **2912**. The relative amplitude of the carrier frequency energy increases in proportion to the amount of DC offset.

FIG. **33** illustrates a transmitter **3302** that is a second embodiment of an IQ transmitter having two DC terminals to cause DC offset, and therefore carrier insertion. Transmitter **3302** is similar to transmitter **3202** except that the 90 degree phase shift between the I and Q channels is achieved by phase shifting the control signals, similar to that done in transmitter **3108**. More specifically, delays **3304***a* and **3304***b* phase shift the control signals **2623** and **2627** for the Q channel modulator **2604***b* relative to those of the I channel modulator **2604***a*. As a result, the Q modulator **2604***b* samples the Q baseband signal **2904** with 90 degree delay relative to the sampling of the I baseband signal **2902** by the I channel modulator **2604***a*. Therefore, the Q harmonically rich signal **2911***b* is phase shifted by 90 degrees relative to the I harmonically rich signal, which is then combined by the in-phase combiner **3306**.

7.3 Universal Transmitter and CDMA

The universal transmitter **2920** (FIG. **29**) and the universal transmitter **5700** (FIG. **57**) can be used to up-convert every known useful analog and digital baseband waveform including but not limited to: AM, FM, PM, BPSK, QPSK, MSK, QAM, ODFM, multi-tone, and spread spectrum signals. For further illustration, FIG. **34**A and FIG. **34**B depict transmitter **2920** configured to up-convert the mentioned modulation waveforms. FIG. **34**A illustrates transmitter **2920** configured to up-convert non-complex waveform including AM and shaped BPSK. In FIG. **34**A, these non-complex (and non-IQ) waveforms are received on the I terminal **3402**, and the Q input **3404** is grounded since only a single channel is needed. FIG. **34**B illustrates a transmitter **2920** that is configured to receive both I and Q inputs for the up-conversion of complex waveforms including QPSK, QAM, OFDM, GSM, and spread spectrum waveforms (including CDMA and frequency hopping). The transmitters in FIGS. **34**A and **34**B are presented for illustrative purposes, and are not limiting. Other embodiments are possible, as will be appreciated in view of the teachings herein.

CDMA is an input waveform that is of particular interest for communications applications. CDMA is the fastest growing digital cellular communications standard in many regions, and now is widely accepted as the foundation for the competing third generation (3G) wireless standard. CDMA is considered to be the among the most demanding of the current digital cellular standards in terms of RF performance requirements.

7.3.1 IS-95 CDMA Specifications

FIG. **35**A and FIG. **35**B illustrate the CDMA specifications for base station and mobile transmitters as required by the IS-95 standard. FIG. **35**A illustrates a base station CDMA signal **3502** having a main lobe **3504** and sidelobes **3506***a* and **3506***b*. For base station transmissions, IS-95 requires that the sidelobes **3506***a,b* are at least 45 dB below the mainlobe **3504** (or 45 dbc) at an offset frequency of 750 kHz, and 60 dBc at an offset frequency of 1.98 MHZ. FIG. **35**B illustrates similar requirements for a mobile CDMA signal **3508** having a main lobe **3510** and sidelobes **3512***a* and **3512***b*. For mobile transmissions, CDMA requires that the sidelobes **3512***a,b* are at least 42 dBc at a frequency offset of 885 kHz, and 54 dBc at a frequency offset 1.98 MHZ.

Rho is another well known performance parameter for CDMA. Rho is a figure-of-merit that measures the amplitude and phase distortion of a CDMA signal that has been processed in some manner (e.g. amplified, up-converted, filtered, etc.) The maximum theoretical value for Rho is 1.0, which indicates no distortion during the processing of the CDMA signal. The IS-95 requirement for the baseband-to-RF interface is Rho=0.9912. As will be shown by the test results below, the transmitter **2920** (in FIG. **29**) can up-convert a CDMA baseband signal and achieve Rho values of approximately Rho=0.9967. Furthermore, the modulator **2910** in the transmitter **2920** achieves these results in standard CMOS (although the invention is not limited to this example implementation), without doing multiple up-conversions and IF filtering that is associated with conventional super-heterodyne configurations.

7.3.2 Conventional CDMA Transmitter

Before describing the CDMA implementation of transmitter **2920**, it is useful to describe a conventional super-heterodyne approach that is used to meet the IS-95 specifications. FIG. **36** illustrates a conventional CDMA transmitter **3600** that up-converts an input signal **3602** to an output CDMA signal **3634**. The conventional CDMA transmitter **3600** includes: a baseband processor **3604**, a baseband filter **3608**, a first mixer **3612**, an amplifier **3616**, a SAW filter **3620**, a second mixer **3624**, a power amplifier **3628**, and a band-select filter **3632**. The conventional CDMA transmitter operates as follows.

The baseband processor **3604** spreads the input signal **3602** with I and Q spreading codes to generate I signal **3606***a* and Q signal **3606***b*, which are consistent with CDMA IS-95 standards. The baseband filter **3608** filters the signals **3606** with the aim of reducing the sidelobes so as to meet the sidelobe specifications that were discussed in FIGS. **35**A and **35**B. Mixer **3612** up-converts the signal **3610** using a first LO signal **3613** to generate an IF signal **3614**. IF amplifier **3616** amplifies the IF signal **3614** to generate IF signal **3618**. SAW filter **3620** has a bandpass response that filters the IF signal **3618** to suppress any sidelobes caused by the non-linear operations of the mixer **3614**. As is understood by those skilled in the arts, SAW filters provide significant signal suppression outside the passband, but are relatively expensive and large compared to other transmitter components. Furthermore, SAW filters are typically built on specialized materials that cannot be integrated onto a standard CMOS chip with other components. Mixer **3624** up-converts the signal **3622** using a second LO signal **3625** to generate RF signal **3626**. Power amplifier **3628** amplifies RF signal **3626** to generate signal **3630**. Band-select filter **3632** bandpass filters RF signal **3630** to suppress any unwanted harmonics in output signal **3634**.

It is noted that transmitter **3602** up-converts the input signal **3602** using an IF chain **3636** that includes the first mixer **3612**, the amplifier **3616**, the SAW filter **3620**, and the second mixer **3624**. The IF chain **3636** up-converts the input signal to an IF frequency and does IF amplification and SAW filtering in order to meet the IS-95 sidelobe and figure-of-merit specifications. This is done because conventional wisdom teaches that a CDMA baseband signal cannot be up-converted directly from baseband to RF, and still meet the IS-95 linearity requirements.

7.3.3 CDMA Transmitter Using the Present Invention

For comparison, FIG. **37**A illustrates an example CDMA transmitter **3700** according to embodiments of the present invention. The CDMA transmitter **3700** includes (it is noted that the invention is not limited to this example): the baseband processor **3604**; the baseband filter **3608**; the IQ modulator **2910** (from FIG. **29**), the control signal generator **2642**, the sub-harmonic oscillator **2646**, the power amplifier **3628**, and the filter **3632**. In the example of FIG. **37**A, the baseband processor **3604**, baseband filter **3608**, amplifier **3628**, and the band-select filter **3632** are the same as that used in the conventional transmitter **3602** in FIG. **36**. The difference is that the IQ modulator **2910** in transmitter **3700** completely replaces the IF chain **3636** in the conventional transmitter **3602**. This is possible because the modulator **2910** up-converts a CDMA signal directly from baseband-to-RF without any IF processing. The detailed operation of the CDMA transmitter **3700** is described with reference to the flowchart **7300** (FIG. **73**) as follows.

In step **7302**, the input baseband signal **3702** is received.

In step **7304**, the CDMA baseband processor **3604** receives the input signal **3702** and spreads the input signal **3702** using I and Q spreading codes, to generate an I signal **3704***a* and a Q signal **3704***b*. As will be understood, the I spreading code and Q spreading codes can be different to improve isolation between the I and Q channels.

In step **7306**, the baseband filter **3608** bandpass filters the I signal **3704***a* and the Q signal **3704***b* to generate filtered I signal **3706***a* and filtered Q signal **3706***b*. As mentioned above, baseband filtering is done to improve sidelobe suppression in the CDMA output signal.

FIGS. **37**B–**37**D illustrate the effect of the baseband filter **3608** on the I an Q inputs signals. FIG. **37**B depicts multiple signal traces (over time) for the filtered I signal **3706***a*, and FIG. **37**C depicts multiple signal traces for the filtered Q signal **3706***b*. As shown, the signals **3706***a,b* can be described as having an "eyelid" shape having a thickness **3715**. The thickness **3715** reflects the steepness of passband roll off of the baseband filter **3608**. In other words, a relatively thick eyelid in the time domain reflects a steep passband roll off in the frequency domain, and results in lower sidelobes for the output CDMA signal. However, there is a tradeoff, because as the eyelids become thicker, then there is a higher probability that channel noise will cause a logic error during decoding at the receiver. The voltage rails **3714** represent the +1/−1 logic states for the I and Q signals **3706**, and correspond to the logic states in complex signal space that are shown in FIG. **37**D.

In step **7308**, the IQ modulator **2910** samples I and Q input signals **3706**A, **3706**B in a differential and balanced fashion according to sub-harmonic clock signals **2623** and **2627**, to generate a harmonically rich signal **3708**. FIG. **37**E illustrates the harmonically rich signal **3708** that includes multiple harmonic images **3716***a–n* that repeat at harmonics of the sampling frequency $1/T_S$. Each image **3716***a–n* is a spread spectrum signal that contains the necessary amplitude, frequency, and phase information to reconstruct the input baseband signal **3702**.

In step **7310**, the amplifier **3628** amplifies the harmonically rich signal **3708** to generate an amplified harmonically rich signal **3710**.

Finally, the band-select filter **3632** selects the harmonic of interest from signal **3710**, to generate an CDMA output signal **3712** that meets IS-95 CDMA specifications. This is represented by passband **3718** selecting harmonic image **3716***b* in FIG. **37**E.

An advantage of the CDMA transmitter **3700** is in that the modulator **2910** up-converts a CDMA input signal directly from baseband to RF without any IF processing, and still meets the IS-95 sidelobe and figure-of-merit specifications. In other words, the modulator **2910** is sufficiently linear and efficient during the up-conversion process that no IF filtering or amplification is required to meet the IS-95 requirements. Therefore, the entire IF chain **3636** can be replaced by the modulator **2910**, including the expensive SAW filter **3620**. Since the SAW filter is eliminated, substantial portions of the transmitter **3702** can be integrated onto a single CMOS chip, for example, that uses standard CMOS process. More specifically, and for illustrative purposes only, the baseband processor **3604**, the baseband filter **3608**, the modulator **2910**, the oscillator **2646**, and the control signal generator **2642** can be integrated on a single CMOS chip, as illustrated by CMOS chip **3802** in FIG. **38**, although the invention is not limited to this implementation example.

FIG. **37**F illustrates a transmitter **3720** that is similar to transmitter **3700** (FIG. **37**A) except that modulator **5701** replaces the modulator **2910**. Transmitter **3700** operates similar to the transmitter **3700** and has all the same advantages of the transmitter **3700**.

Other embodiments discussed or suggested herein can be used to implement other CDMA transmitters according to the invention.

7.3.4 CDMA Transmitter Measured Test Results

As discussed above, the UFT-based modulator **2910** directly up-converts baseband CDMA signals to RF without any IF filtering, while maintaining the required figures-of-merit for IS-95. The modulator **2910** has been extensively tested in order to specifically determine the performance parameters when up-converting CDMA signals. The test system and measurement results are discussed as follows.

FIG. **39** illustrates a test system **3900** that measures the performance of the modulator **2910** when up-converting CDMA baseband signals. The test system **3900** includes: a Hewlett Packerd (HP) generator E4433B, attenuators **3902***a* and **3902***b*, control signal generator **2642**, UFT-based modulator **2910**, amplifier/filter module **3904**, cable/attienuator **3906**, and HP 4406A test set. The HP generator E4433B generates I and Q CDMA baseband waveforms that meet the IS-95 test specifications. The waveforms are routed to the UFT-based modulator **2910** through the 8-dB attenuators **3902***a* and **3902***b*. The HP generator E4433B also generates the sub-harmonic clock signal **2645** that triggers the control signal generator **2642**, where the sub-harmonic clock **2645** has a frequency of 279 MHZ. The modulator **2910** up-converts the I and Q baseband signals to generate a harmonic rich signal **3903** having multiple harmonic images that represent the input baseband signal and repeat at the sampling frequency. The amplifier/filter module **3904** selects and amplifies the 3rd harmonic (of the 279 MHZ clock signal) in the signal **3903** to generate the signal **3905** at 837 MHZ. The HP 4406A test set accepts the signal **3905** for analysis through the cable/attenuator **3906**. The HP 4406A measures CDMA modulation attributes including: Rho, EVM, phase error, amplitude error, output power, carrier insertion, and ACPR. In addition, the signal is

demodulated and Walsh code correlation parameters are analyzed. Both forward and reverse links have been characterized using pilot, access, and traffic channels. For further illustration, FIGS. **40**–**60**Z display the measurement results for the RF spectrum **3905** based on various base station and mobile waveforms that are generated by the HP E443B generator.

FIGS. **40** and **41** summarize the performance parameters of the modulator **2910** as measured by the test set **3900** for base station and mobile station input waveforms, respectively. For the base station, table **4002** includes lists performance parameters that were measured at a base station middle frequency and includes: Rho, EVM, phase error, magnitude error, carrier insertion, and output power. It is noted that Rho=0.997 for the base station middle frequency and exceeds the IS-95 requirement of Rho=0.912. For the mobile station, FIG. **41** illustrates a table **4102** that lists performance parameters that were measured at low, middle, and high frequencies. It is noted that the Rho exceeds the IS-95 requirement (0.912) for each of the low, middle, high frequencies of the measured waveform.

FIG. **42** illustrates a base station constellation **4202** measured during a pilot channel test. A signal constellation plots the various logic combinations for the I and Q signals in complex signal space, and is the raw data for determining the performance parameters (including Rho) that are listed in Table **40**. The performance parameters (in table **40**) are also indicated beside the constellation measurement **4202** for convenience. Again, it is noted that Rho=0.997 for this test. A value of 1 is perfect, and 0.912 is required by the IS-95 CDMA specification, although most manufactures strive for values greater than 0.94. This is a remarkable result since the modulator **2910** up-converts directly from baseband-to-RF without any IF filtering.

FIG. **43** illustrates a base station sampled constellation **4302**, and depicts the tight constellation samples that are associated with FIG. **42**. The symmetry and sample scatter compactness are illustrative of the superior performance of the modulator **2910**.

FIG. **44** illustrates a mobile station constellation **4402** measured during an access channel test. As shown, Rho=0.997 for the mobile station waveforms. Therefore, the modulator **2910** operates very well with conventional and offset shaped QPSK modulation schemes.

FIG. **45** illustrates a mobile station sampled constellation **4502**. Constellation **4502** illustrates excellent symmetry for the constellation sample scatter diagram.

FIG. **46** illustrates a base station constellation **4602** using only the HP test equipment. The modulator **2910** has been removed so that the base station signal travels only through the cables that connect the HP signal generator E4433B to the HP 4406A test set. Therefore, constellation **4602** measures signal distortion caused by the test set components (including the cables and the attenuators). It is noted that Rho=0.9994 for this measurement using base station waveforms. Therefore, at least part of the minimal signal distortion that is indicated in FIGS. **42** and **43** is caused by the test set components, as would be expected by those skilled in the relevant arts.

FIG. **47** illustrates a mobile station constellation **4702** using only the HP test equipment. As in FIG. **46**, the modulator **2910** has been removed so that the mobile station signal travels only through the cables that connect the HP signal generator E4433B to the HP 4406A test set. Therefore, constellation **4602** measures signal distortion caused by the test set components (including the cables and the attenuators). It is noted that Rho=0.9991 for this measurement using mobile station waveforms. Therefore, at least part of the signal distortion indicated in FIGS. **44** and **45** is caused by the test set components, as would be expected.

FIG. **48** illustrates a frequency spectrum **4802** of the signal **3905** with a base station input waveform. The frequency spectrum **4802** has a main lobe and two sidelobes, as expected for a CDMA spread spectrum signal. The adjacent channel power ratio (ACPR) measures the spectral energy at a particular frequency of the side lobes relative to the main lobe. As shown, the frequency spectrum **4802** has an ACPR=−48.34 dBc and −62.18 dBc at offset frequencies of 750 KHz and 1.98 MHZ, respectively. The IS-95 ACPR requirement for a base station waveform is −45 dBc and −60 dBc maximum, at the offset frequencies of 750 kHz and 1.98 MHZ, respectively. Therefore, the modulator **2910** has more than 3 dB and 2 dB of margin over the IS-95 requirements for the 750 kHz and 1.98 MHZ offsets, respectively.

FIG. **49** illustrates a histogram **4902** that corresponds to the spectrum plot in FIG. **48**. The histogram **4902** illustrates the distribution of the spectral energy in the signal **3905** for a base station waveform.

FIG. **50** illustrates a frequency spectrum **5002** of the signal **3905** with a mobile station input waveform. As shown, the ACPR measurement is −52.62 dBc and −60.96 dBc for frequency offsets of 885 kHz and 1.98 MHZ, respectively. The IS-95 ACPR requirement for a mobile station waveform is approximately 42 dBc and −54 dBc, respectively. Therefore, the modulator **2910** has over 10 dB and 6 dB of margin above the IS-95 requirements for the 885 kHz and 1.98 MHZ frequency offsets, respectively.

FIG. **51** illustrates a histogram **5102** that corresponds to the mobile station spectrum plot in FIG. **50**. The histogram **5102** illustrates the distribution of the spectral energy in the signal **3905** for a mobile station waveform.

FIG. **52**A illustrates a histogram **5202** for crosstalk vs. CDMA channel with a base station input waveform. More specifically, the HP E4406A was utilized as a receiver to analyze the orthogonality of codes superimposed on the base station modulated spectrum. The HP E4406A demodulated the signal provided by the modulator/transmitter and determined the crosstalk to non-active CDMA channels. The pilot channel is in slot '0' and is the active code for this test. All non-active codes are suppressed in the demodulation process by greater than 40 dB. The IS-95 requirement is 27 dB of suppression so that there is over 13 dB of margin. This implies that the modulator **2910** has excellent phase and amplitude linearity.

In additions to the measurements described above, measurements were also conducted to obtain the timing and phase delays associated with a base station transmit signal composed of pilot and active channels. Delta measurements were extracted with the pilot signal as a reference. The delay and phase are −5.7 ns (absolute) and 7.5 milli radians, worst case. The standard requires less than 50 ns (absolute) and 50 milli radians, which the modulator **2910** exceeded with a large margin.

The performance sensitivity of modulator **2910** was also measured over multiple parameter variations. More specifically, the performance sensitivity was measured vs. IQ input signal level variation and LO signal level variation, for both base station and mobile station modulation schemes. (LO signal level is the signal level of the subharmonic clock **2645** in FIG. **39**.) FIGS. **52**B–O depict performance sensitivity of the modulator **2910** using the base station modulation scheme, and FIGS. **52**P–Z depict performance sensitivity using the mobile station modulation

scheme. These plots reveal that the modulator **2910** is expected to enable good production yields since there is a large acceptable operating performance range for I/Q and LO peak to peak voltage inputs. The plots are described further as follows.

FIG. **52**B illustrates Rho vs. shaped IQ input signal level using base station modulation.

FIG. **52**C illustrates transmitted channel power vs. shaped IQ input signal level using base station modulation.

FIG. **52**D illustrates ACPR vs. shaped IQ Input signal level using base station modulation.

FIG. **52**E illustrates EVM and Magnitude error vs shaped IQ input level using base station modulation.

FIG. **52**F illustrates carrier feed thru vs. shaped IQ input signal level using base station modulation.

FIG. **52**G illustrates Rho vs. LO signal level using base station modulation.

FIG. **52**H illustrates transmitted channel power vs. LO signal level using base station modulation.

FIG. **52**I illustrates ACPR vs. LO signal level using base station modulation.

FIG. **52**J illustrates EVM and magnitude error vs LO signal level using base station modulation.

FIG. **52**K illustrates carrier feed thru vs. LO signal level using base station modulation.

FIG. **52**L illustrates carrier feed thru vs IQ input level over a wide range using base station modulation.

FIG. **52**M illustrates ACPR vs. shaped IQ input signal level using base station modulation.

FIG. **52**N illustrates Rho vs. shaped IQ input signal level using base station modulation.

FIG. **52**O illustrates EVM, magnitude error, and phase error vs. shaped IQ input signal level using base station modulation.

FIG. **52**P illustrates Rho vs. shaped IQ input signal level using mobile station modulation.

FIG. **52**Q illustrates transmitted channel power vs. shaped IQ input signal level using mobile station modulation.

FIG. **52**R illustrates ACPR vs. shaped IQ Input signal level using mobile station modulation.

FIG. **52**S illustrates EVM, magnitude error, and phase error vs. shaped IQ input level using mobile station modulation.

FIG. **52**T illustrates carrier feed thru vs. shaped I Q input signal level using mobile station modulation.

FIG. **52**U illustrates Rho vs. LO signal level using mobile station modulation.

FIG. **52**V illustrates transmitted channel power vs. LO signal level using mobile station modulation.

FIG. **52**W illustrates ACPR vs. LO signal level using mobile station modulation.

FIG. **52**X illustrates EVM and magnitude error vs. LO signal level using mobile station modulation.

FIG. **52**Y illustrates carrier feed thru vs. LO signal level using mobile station modulation.

FIG. **52**Z illustrates an approximate power budget for a CDMA modulator based on the modulator **2910**.

FIGS. **52**B–Z illustrate that the UFT-based complex modulator **2910** comfortably exceeds the IS-95 transmitter performance requirements for both mobile and base station modulations, even with signal level variations. Testing indicates that Rho as well as carrier feed through and ACPR are not overly sensitive to variations in I/Q levels and LO levels. Estimated power consumption for the modulator **2910** is lower than equivalent two-state superheterodyne architecture. This means that a practical UFT based CDMA transmitter can be implemented in bulk CMOS and efficiently produced in volume.

The UFT architecture achieves the highest linearity per milliwatt of power consumed of any radio technology of which the inventors are aware. This efficiency comes without a performance penalty, and due to the inherent linearity of the UFT technology, several important performance parameters may actually be improved when compared to traditional transmitter techniques.

Since the UFT technology can be implemented in standard CMOS, new system partitioning options are available that have not existed before. As an example, since the entire UFT-based modulator can be implemented in CMOS, it is plausible that the modulator and other transmitter functions can be integrated with the digital baseband processor leaving only a few external components such as the final bandpass filter and the power amplifier. In addition to the UFT delivering the required linearity and dynamic range performance, the technology also has a high level of immunity to digital noise that would be found on the same substrate when integrated with other digital circuitry. This is a significant step towards enabling a complete wireless system-on-chip solution.

It is noted that the test setup, procedures, and results discussed above and shown in the figures were provided for illustrative purposes only, and do not limit the invention to any particular embodiment, implementation or application.

8.0 Integrated Up-Conversion and Spreading of a Baseband Signal

Previous sections focused on up-converting a spread spectrum signal directly from baseband-to-RF, without preforming any IF processing. In these embodiments, the baseband signal was already a spread spectrum signal prior to up-conversion. The following discussion focuses on embodiments that perform the spreading function and the frequency translation function in a simultaneously and in an integrated manner. One type of spreading code is Code Division Multiple Access (or CDMA), although the invention is not limited to this. The present invention can be implemented in CDMA, and other spread spectrum systems as will be understood by those skilled in the arts based on the teachings herein.

8.1 Integrated Up-Conversion and Spreading Using an Amplitude Shaper

FIG. **53**A illustrates a spread spectrum transmitter **5300** that is based on the UFT-based modulator **2604** that was discussed in FIG. **26**A. Spread spectrum transmitter **5300** performs simultaneous up-conversion and spreading of an input baseband signal **5302** to generate an output signal **5324**. As will shown, the spreading is accomplished by placing the spreading code on the control signals that operate the UFT modules in the modulator **2604** so that the spreading and up-conversion are accomplished in an integrated manner. In order to limit sidelobe spectral growth in the output signal **5324**, the amplitude of the input baseband signal **5302** is shaped so as to correspond with the spreading code. The operation of spread spectrum transmitter **5300** is described in detail as follows with reference to flowchart **6700** that is shown in FIG. **67**. The order of the steps in flowchart **6700** are not limiting and may be rearranged as will be understood by those skilled in the arts. (This is generally true of all flowcharts discussed herein).

In step **6701**, the spread spectrum transmitter **5300** receives the input baseband signal **5302**.

In step **6702**, the oscillator **2646** generates the clock signal **2645**. As described earlier, the clock signal **2645** is in embodiments a sub-harmonic of the output signal **5324**. Furthermore, in embodiments of the invention, the clock signal **2645** is a periodic square wave or sinusoidal clock signal.

In step **6704**, a spreading code generator **5314** generates a spreading code **5316**. In embodiments of the invention, the spreading code **5316** is a PN code, or any other type of spreading code that is useful for generating spread spectrum signals.

In step **6706**, the multiplier **5318** modulates the clock signal **2645** with the spreading code **5316** to generate spread clock signal **5320**. As such, the spread clock signal **5320** carries the spreading code **5316**.

In step **6708**, the control signal generator **2642** receives the spread clock signal **5320**, and generates control signals **5321** and **5322** that operate the UFT modules in the modulator **2604**. The control signals **5321** and **5322** are similar to clock signals **2623** and **2627** that were discussed in FIG. **26**. In other words, the clock signals **5321** and **5322** include a plurality of pulses having a pulse width T_A that is established to improve energy transfer to a desired harmonic in the resulting harmonically rich signal. Additionally, the control signals **5321** and **5322** are phase shifted with respect to each other by approximately 180 degrees (although the invention is not limited to this example), as were the control signals **2623** and **2627**. However, the control signals **5321** and **5322** are modulated with (and carry) the spreading code **5316** because they were generated from spread clock signal **5320**.

In step **6710**, the amplitude shaper **5304** receives the input baseband signal **5302** and shapes the amplitude so that it corresponds with the spreading code **5316** that is generated by the code generator **5314**, resulting in a shaped input signal **5306**. This is achieved by feeding the spreading code **5316** back to the amplitude shaper **5304** and smoothing the amplitude of the input baseband signal **5302**, accordingly.

FIG. **53**B illustrates the resulting shaped input signal **5306** and the corresponding spreading code **5316**. The amplitude of the input signal **5302** is shaped such that it is smooth and so that it has zero crossings that are in time synchronization with the spreading code **5316**. By smoothing input signal amplitude, high frequency components are removed from the input signal prior to sampling, which results lower sidelobe energy in the harmonic images produced during sampling. Implementation of amplitude shaper **5304** will be apparent to persons skilled in the art base on the functional teachings combined herein.

In step **6712**, the low pass filter **5308** filters the shaped input signal **5306** to remove any unwanted high frequency components, resulting in a filtered signal **5310**.

In step **6714**, the modulator **2604** samples the signal **5310** in a balanced and differential manner according to the control signals **5320** and **5322**, to generate a harmonically rich signal **5312**. As discussed in reference to FIG. **26**, the control signals **5320** and **5322** trigger the controlled switches in the modulator **2604**, resulting in multiple harmonic images of the baseband signal **5302** in the harmonically rich signal **5312**. Since the control signals carry the spreading code **5316**, the modulator **2604** up-converts and spreads the filtered signal **5310** in an integrated manner during the sampling process. As such, the harmonic images in the harmonically rich signal **5312** are spread spectrum signals. FIG. **53**C illustrates the harmonically rich signal **5312** that includes multiple harmonic images **5320***a–n* that repeat at harmonics of the sampling frequency $1/T_S$. Each image **5320***a–n* is a spread spectrum signal that contains the necessary amplitude and frequency information to reconstruct the input baseband signal **5302**.

In step **6716**, the optional filter **2606** selects a desired harmonic (or harmonics) from the harmonically rich signal **5312**. This is presented by the passband **5322** selecting the spread harmonic **5320***c* in FIG. **53**C.

In step **6718**, the optional amplifier **2608** amplifies the desired harmonic (or harmonics) for transmission.

As mentioned above, an advantage of the spread spectrum transmitter **5300** is that the spreading and up-conversion is accomplished in a simultaneous and integrated manner. This is a result of modulating the control signals that operate the UFT modules in the balanced modulator **2604** with the spreading code prior to sampling of the baseband signal. Furthermore, by shaping the amplitude of the baseband signal prior to sampling, the sidelobe energy in the spread spectrum harmonics is minimized. As discussed above, minimal sidelobe energy is desirable in order to meet the sidelobe standards of the CDMA IS-95 standard (see FIGS. **43**A and **43**B).

FIG. **61** illustrates an IQ spread spectrum modulator **6100** that is based on the spread spectrum transmitter **5300**. Spread spectrum modulator **6100** performs simultaneous up-conversion and spreading of an I baseband signal **6102** and a Q baseband signal **6118** to generate an output signal **6116** that carries both the I and Q baseband information. The operation of the modulator **6100** is described in detail with reference to the flowchart **6800** that is shown in FIGS. **68**A and **68**B. The steps in flowchart **6800** are not limiting and may be re-arranged as will be understood by those skilled in the arts.

In step **6801**, the IQ modulator **6100** receives the I data signal **6102** and the Q data signal **6118**.

In step **6802**, the oscillator **2646** generates the clock signal **2645**. As described earlier, the clock signal **2645** is in embodiments a sub-harmonic of the output signal **6116**. Furthermore, in embodiments of the invention, the clock signal **2645** is a periodic square wave or sinusoidal clock signal.

In step **6804**, an I spreading code generator **6140** generates an I spreading code **6144** for the I channel. Likewise, a Q spreading code generator **6138** generates a Q spreading code **6142** for the Q channel. In embodiments of the invention, the spreading codes are PN codes, or any other type of spreading code that is useful for generating spread spectrum signals. In embodiments of the invention, the I spreading code and Q spreading code can be the same spreading code. Alternatively, the I and Q spreading codes can be different to improve isolation between the I and Q channels, as will be understood by those skilled in the arts.

In step **6806**, the multiplier **5318***a* modulates the clock signal **2645** with the I spreading code **6144** to generate a spread clock signal **6136**. Likewise, the multiplier **5318***b* modulates the clock signal **2645** with the Q spreading code **6142** to generate a spread clock signal **6134**.

In step **6808**, the control signal generator **2642***a* receives the I clock signal **6136** and generates control signals **6130** and **6132** that operate the UFT modules in the modulator **2604***a*. The controls signals **6130** and **6132** are similar to clock signals **2623** and **2627** that were discussed in FIG. **26**. The difference being that signals **6130** and **6132** are modulated with (and carry) the I spreading code **6144**. Likewise, the control signal generator **2642***b* receives the Q clock signal **6134** and generates control signals **6126** and **6128** that operate the UFT modules in the modulator **2604***b*.

In step **6810**, the amplitude shaper **5304***a* receives the I data signal **6102** and the shapes the amplitude so that it corresponds with the spreading code **6144**, resulting in I shaped data signal **6104**. This is achieved by feeding the spreading code **6144** back to the amplitude shaper **5304***a*. The amplitude shaper then shapes the amplitude of the input baseband signal **6102** to correspond to the spreading code **6144**, as described for spread spectrum transmitter **5300**.

More specifically, the amplitude of the input signal **6102** is shaped such that it is smooth and so that it has zero crossings that are in time synchronization with the I spreading code **6144**. Likewise, the amplitude shaper **5304***b* receives the Q data signal **6118** and shapes amplitude of the Q data signal **6118** so that it corresponds with the Q spreading code **6142**, resulting in Q shaped data signal **6120**.

In step **6812**, the low pass filter **5308***a* filters the I shaped data signal **6104** to remove any unwanted high frequency components, resulting in a I filtered signal **6106**. Likewise, the low pass filter **5308***b* filters the Q shaped data signal **6120**, resulting in Q filtered signal **6122**.

In step **6814**, the modulator **2604***a* samples the I filtered signal **6106** in a balanced and differential manner according to the control signals **6130** and **6132**, to generate a harmonically rich signal **6108**. As discussed in reference to FIG. **26**, the control signals **6130** and **6132** trigger the controlled switches in the modulator **2604***a*, resulting in multiple harmonic images in the harmonically rich signal **6108**, where each image contains the I baseband information. Since the control signals **6130** and **6132** also carry the I spreading code **6144**, the modulator **2604***a* up-converts and spreads the filtered signal **6106** in an integrated manner during the sampling process. As such, the harmonic images in the harmonically rich signal **6108** are spread spectrum signals.

In step **6816**, the modulator **2604***b* samples the Q filtered signal **6122** in a balanced and differential manner according to the control signals **6126** and **6128**, to generate a harmonically rich signal **6124**. The control signals **6126** and **6128** trigger the controlled switches in the modulator **2604***b*, resulting in multiple harmonic images in the harmonically rich signal **6124**, where each image contains the Q baseband information. As with modulator **2604***a*, the control signals **6126** and **6128** carry the Q spreading code **6142** so that the modulator **2604***b* up-converts and spreads the filtered signal **6122** in an integrated manner during the sampling process. In other words, the harmonic images in the harmonically rich signal **6124** are also spread spectrum signals.

In step **6818**, a 90 signal combiner **6146** combines the I harmonically rich signal **6108** and the Q harmonically rich signal **6124**, to generate the IQ harmonically rich signal **6148**. The IQ harmonically rich signal **6148** contains multiple harmonic images, where each images contains the spread I data and the spread Q data. The 90 degree combiner phase shifts the Q signal **6124** relative to the I signal **6108** so that no increase in spectrum width is needed for the IQ signal **6148**, when compared the I signal or the Q signal.

In step **6820**, the optional bandpass filter **2606** select the harmonic (or harmonics) of interest from the harmonically rich signal **6148**, to generate signal **6114**.

In step **6222**, the optional amplifier **2608** amplifies the desired harmonic **6114** for transmission.

8.2 Integrated Up-Conversion and Spreading Using a Smoothing Varying Clock Signal

FIG. **54**A illustrates a spread spectrum transmitter **5400** that is a second embodiment of balanced UFT modules that perform up-conversion and spreading simultaneously. More specifically, the spread spectrum transmitter **5400** does simultaneous up-conversion and spreading of an I data signal **5402***a* and a Q data signal **5402***b* to generate an IQ output signal **5428**. Similar to modulator **6100**, transmitter **5400** modulates the clock signal that controls the UFT modules with the spreading codes to spread the input I and Q signals during up-conversion. However, the transmitter **5400** modulates the clock signal by smoothly varying the instantaneous frequency or phase of a voltage controlled oscillator (VCO) with the spreading code. The transmitter **5400** is described in detail as follows with reference to a flowchart **6900** that is shown in FIGS. **69**A and **69**B.

In step **6901**, the transmitter **5400** receives the I baseband signal **5402***a* and the Q baseband signal **5402***b*.

In step **6902**, a code generator **5423** generates a spreading code **5422**. In embodiments of the invention, the spreading code **5422** is a PN code or any other type off useful code for spread spectrum systems. Additionally, in embodiments of the invention, there are separate spreading codes for the I and Q channels.

In step **6904**, a clock driver circuit **5421** generates a clock driver signal **5420** that is phase modulated according to a spreading code **5422**. FIG. **54**B illustrates the clock driver signal **5420** as series of pulses, where the instantaneous frequency (or phase) of the pulses is determined by the spreading code **5422**, as shown. In embodiments of the invention, the phase of the pulses in the clock driver **5420** is varied smoothly in correlation with the spreading code **5422**.

In step **6906**, a voltage controlled oscillator **5418** generates a clock signal **5419** that has a frequency that varies according to a clock driver signal **5420**. As mentioned above, the phase of the pulses in the clock driver **5420** is varied smoothly in correlation with the spreading code **5422** in embodiments of the invention. Since the clock driver **5420** controls the oscillator **5418**, the frequency of the clock signal **5419** varies smoothly as a function of the PN code **5422**. By smoothly varying the frequency of the clock signal **5419**, the sidelobe growth in the spread spectrum images is minimized during the sampling process.

In step **6908**, the pulse generator **2644** generates a control signal **5415** based on the clock signal **5419** that is similar to either one the controls signals **2623** or **2627** (in FIGS. **27**A and **27**B). The control signal **5415** carries the spreading code **5422** via the clock signal **5419**. In embodiments of the invention, the pulse width (T_A) of the control signal **5415** is established to enhance or optimize energy transfer to specific harmonics in the harmonically rich signal **5428** at the output. For the Q channel, a phase shifter **5414** shifts the phase of the control signal **5415** by 90 degrees to implement the desired quadrature phase shift between the I and Q channels, resulting in a control signal **5413**.

In step **6910**, a low pass filter (LPF) **5406***a* filters the I data signal **5402***a* to remove any unwanted high frequency components, resulting in an I signal **5407***a*. Likewise, a LPF **5406***b* filters the Q data signal **5402***b* to remove any unwanted high frequency components, to generate the Q signal **5407***b*.

In step **6912**, a UFT module **5408***a* samples the I data signal **5407***a* according to the control signal **5415** to generate a harmonically rich signal **5409***a*. The harmonically rich signal **5409***a* contains multiple spread spectrum harmonic images that repeat at harmonics of the sampling frequency. Similar to transmitter **5300**, the harmonic images in signal **5409***a* carry the I baseband information, and are spread spectrum due to the spreading code on the control signal **5415**.

In step **6914**, a UFT module **5408***b* samples the Q data signal **5407***b* according to the control signal **5413** to generate harmonically rich signal **5409***b*. The harmonically rich signal **5409***b* contains multiple spread spectrum harmonic images that repeat at harmonics of the sampling frequency. The harmonic images in signal **5409***a* carry the Q baseband information, and are spread spectrum due to the spreading code on the control signal **5413**.

In step **6916**, a signal combiner **5410** combines the harmonically rich signal **5409***a* with the harmonically rich

signal **5409***b* to generate an IQ harmonically rich signal **5412**. The harmonically rich signal **5412** carries multiple harmonic images, where each image carries the spread I data and the spread Q data.

In step **6918**, the optional bandpass filter **5424** selects a harmonic (or harmonics) of interest for transmission, to generate the IQ output signal **5428**.

FIG. **54**C illustrates a transmitter **5430** that is similar to the transmitter **5400** except that the UFT modules are replaced by balanced UFT modulators **2604** that were described in FIG. **26**. Also, the pulse generator is replaced by the control signal generator **2642** to generate the necessary control signals to operate the UFT modules in the balanced modulators. By replacing the UFT modules with balanced UFT modulators, sidelobe suppression can be improved.

9.0 Shunt Receiver Embodiments Utilizing UFT Modules

In this section, example receiver embodiments are presented that utilize UFT modules in a differential and shunt configuration. More specifically, embodiments, according to the present invention, are provided for reducing or eliminating DC offset and/or reducing or eliminating circuit re-radiation in receivers, including I/Q modulation receivers and other modulation scheme receivers. These embodiments are described herein for purposes of illustration, and not limitation. The invention is not limited to these embodiments. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein) will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

9.1 Example I/Q Modulation Receiver Embodiments

FIG. **70**A illustrates an exemplary I/Q modulation receiver **7000**, according to an embodiment of the present invention. I/Q modulation receiver **7000** has additional advantages of reducing or eliminating unwanted DC offsets and circuit re-radiation.

I/Q modulation receiver **7000** comprises a first UFD module **7002**, a first optional filter **7004**, a second UFD module **7006**, a second optional filter **7008**, a third UFD module **7010**, a third optional filter **7012**, a fourth UFD module **7014**, a fourth filter **7016**, an optional LNA **7018**, a first differential amplifier **7020**, a second differential amplifier **7022**, and an antenna **7072**.

I/Q modulation receiver **7000** receives, down-converts, and demodulates a I/Q modulated RF input signal **7082** to an I baseband output signal **7084**, and a Q baseband output signal **7086**. I/Q modulated RF input signal **7082** comprises a first information signal and a second information signal that are I/Q modulated onto an RF carrier signal. I baseband output signal **7084** comprises the first baseband information signal. Q baseband output signal **7086** comprises the second baseband information signal.

Antenna **7072** receives I/Q modulated RF input signal **7082**. I/Q modulated RF input signal **7082** is output by antenna **7072** and received by optional LNA **7018**. When present, LNA **7018** amplifies I/Q modulated RF input signal **7082**, and outputs amplified I/Q signal **7088**.

First UFD module **7002** receives amplified I/Q signal **7088**. First UFD module **7002** down-converts the I-phase signal portion of amplified input I/Q signal **7088** according to an I control signal **7090**. First UFD module **7002** outputs an I output signal **7098**.

In an embodiment, first UFD module **7002** comprises a first storage module **7024**, a first UFT module **7026**, and a first voltage reference **7028**. In an embodiment, a switch contained within first UFT module **7026** opens and closes as a function of I control signal **7090**. As a result of the opening and closing of this switch, which respectively couples and de-couples first storage module **7024** to and from first voltage reference **7028**, a down-converted signal, referred to as I output signal **7098**, results. First voltage reference **7028** may be any reference voltage, and is preferably ground. I output signal **7098** is stored by first storage module **7024**.

In an embodiment, first storage module **7024** comprises a first capacitor **7074**. In addition to storing I output signal **7098**, first capacitor **7074** reduces or prevents a DC offset voltage resulting from charge injection from appearing on I output signal **7098**.

I output signal **7098** is received by optional first filter **7004**. When present, first filter **7004** is in some embodiments a high pass filter to at least filter I output signal **7098** to remove any carrier signal "bleed through". In a preferred embodiment, when present, first filter **7004** comprises a first resistor **7030**, a first filter capacitor **7032**, and a first filter voltage reference **7034**. Preferably, first resistor **7030** is coupled between I output signal **7098** and a filtered I output signal **7007**, and first filter capacitor **7032** is coupled between filtered I output signal **7007** and first filter voltage reference **7034**. Alternately, first filter **7004** may comprise any other applicable filter configuration as would be understood by persons skilled in the relevant art(s). First filter **7004** outputs filtered I output signal **7007**.

Second UFD module **7006** receives amplified I/Q signal **7088**. Second UFD module **7006** down-converts the inverted I-phase signal portion of amplified input I/Q signal **7088** according to an inverted I control signal **7092**. Second UFD module **7006** outputs an inverted I output signal **7001**.

In an embodiment, second UFD module **7006** comprises a second storage module **7036**, a second UFT module **7038**, and a second voltage reference **7040**. In an embodiment, a switch contained within second UFT module **7038** opens and closes as a function of inverted I control signal **7092**. As a result of the opening and closing of this switch, which respectively couples and de-couples second storage module **7036** to and from second voltage reference **7040**, a down-converted signal, referred to as inverted I output signal **7001**, results. Second voltage reference **7040** may be any reference voltage, and is preferably ground. Inverted I output signal **7001** is stored by second storage module **7036**.

In an embodiment, second storage module **7036** comprises a second capacitor **7076**. In addition to storing inverted I output signal **7001**, second capacitor **7076** reduces or prevents a DC offset voltage resulting from charge injection from appearing on inverted I output signal **7001**.

Inverted I output signal **7001** is received by optional second filter **7008**. When present, second filter **7008** is a high pass filter to at least filter inverted I output signal **7001** to remove any carrier signal "bleed through". In a preferred embodiment, when present, second filter **7008** comprises a second resistor **7042**, a second filter capacitor **7044**, and a second filter voltage reference **7046**. Preferably, second resistor **7042** is coupled between inverted I output signal **7001** and a filtered inverted I output signal **7009**, and second filter capacitor **7044** is coupled between filtered inverted I output signal **7009** and second filter voltage reference **7046**. Alternately, second filter **7008** may comprise any other applicable filter configuration as would be understood by persons skilled in the relevant art(s). Second filter **7008** outputs filtered inverted I output signal **7009**.

First differential amplifier **7020** receives filtered I output signal **7007** at its non-inverting input and receives filtered inverted I output signal **7009** at its inverting input. First differential amplifier **7020** subtracts filtered inverted I output

signal **7009** from filtered I output signal **7007**, amplifies the result, and outputs I baseband output signal **7084**. Because filtered inverted I output signal **7009** is substantially equal to an inverted version of filtered I output signal **7007**, **1** baseband output signal **7084** is substantially equal to filtered I output signal **7009**, with its amplitude doubled. Furthermore, filtered I output signal **7007** and filtered inverted I output signal **7009** may comprise substantially equal noise and DC offset contributions from prior down-conversion circuitry, including first UFD module **7002** and second UFD module **7006**, respectively. When first differential amplifier **7020** subtracts filtered inverted I output signal **7009** from filtered I output signal **7007**, these noise and DC offset contributions substantially cancel each other.

Third UFD module **7010** receives amplified I/Q signal **7088**. Third UFD module **7010** down-converts the Q-phase signal portion of amplified input I/Q signal **7088** according to an Q control signal **7094**. Third UFD module **7010** outputs an Q output signal **7003**.

In an embodiment, third UFD module **7010** comprises a third storage module **7048**, a third UFT module **7050**, and a third voltage reference **7052**. In an embodiment, a switch contained within third UFT module **7050** opens and closes as a function of Q control signal **7094**. As a result of the opening and closing of this switch, which respectively couples and de-couples third storage module **7048** to and from third voltage reference **7052**, a down-converted signal, referred to as Q output signal **7003**, results. Third voltage reference **7052** may be any reference voltage, and is preferably ground. Q output signal **7003** is stored by third storage module **7048**.

In an embodiment, third storage module **7048** comprises a third capacitor **7078**. In addition to storing Q output signal **7003**, third capacitor **7078** reduces or prevents a DC offset voltage resulting from charge injection from appearing on Q output signal **7003**.

Q output signal **7003** is received by optional third filter **7012**. When present, in an embodiment, third filter **7012** is a high pass filter to at least filter Q output signal **7003** to remove any carrier signal "bleed through". In an embodiment, when present, third filter **7012** comprises a third resistor **7054**, a third filter capacitor **7056**, and a third filter voltage reference **7058**. Preferably, third resistor **7054** is coupled between Q output signal **7003** and a filtered Q output signal **7011**, and third filter capacitor **7056** is coupled between filtered Q output signal **7011** and third filter voltage reference **7058**. Alternately, third filter **7012** may comprise any other applicable filter configuration as would be understood by persons skilled in the relevant art(s). Third filter **7012** outputs filtered Q output signal **7011**.

Fourth UFD module **7014** receives amplified I/Q signal **7088**. Fourth UFD module **7014** down-converts the inverted Q-phase signal portion of amplified input I/Q signal **7088** according to an inverted Q control signal **7096**. Fourth UFD module **7014** outputs an inverted Q output signal **7005**.

In an embodiment, fourth UFD module **7014** comprises a fourth storage module **7060**, a fourth UFT module **7062**, and a fourth voltage reference **7064**. In an embodiment, a switch contained within fourth UFT module **7062** opens and closes as a function of inverted Q control signal **7096**. As a result of the opening and closing of this switch, which respectively couples and de-couples fourth storage module **7060** to and from fourth voltage reference **7064**, a down-converted signal, referred to as inverted Q output signal **7005**, results. Fourth voltage reference **7064** may be any reference voltage, and is preferably ground. Inverted Q output signal **7005** is stored by fourth storage module **7060**.

In an embodiment, fourth storage module **7060** comprises a fourth capacitor **7080**. In addition to storing inverted Q output signal **7005**, fourth capacitor **7080** reduces or prevents a DC offset voltage resulting from charge injection from appearing on inverted Q output signal **7005**.

Inverted Q output signal **7005** is received by optional fourth filter **7016**. When present, fourth filter **7016** is a high pass filter to at least filter inverted Q output signal **7005** to remove any carrier signal "bleed through". In a preferred embodiment, when present, fourth filter **7016** comprises a fourth resistor **7066**, a fourth filter capacitor **7068**, and a fourth filter voltage reference **7070**. Preferably, fourth resistor **7066** is coupled between inverted Q output signal **7005** and a filtered inverted Q output signal **7013**, and fourth filter capacitor **7068** is coupled between filtered inverted Q output signal **7013** and fourth filter voltage reference **7070**. Alternately, fourth filter **7016** may comprise any other applicable filter configuration as would be understood by persons skilled in the relevant art(s). Fourth filter **7016** outputs filtered inverted Q output signal **7013**.

Second differential amplifier **7022** receives filtered Q output signal **7011** at its non-inverting input and receives filtered inverted Q output signal **7013** at its inverting input. Second differential amplifier **7022** subtracts filtered inverted Q output signal **7013** from filtered Q output signal **7011**, amplifies the result, and outputs Q baseband output signal **7086**. Because filtered inverted Q output signal **7013** is substantially equal to an inverted version of filtered Q output signal **7011**, Q baseband output signal **7086** is substantially equal to filtered Q output signal **7013**, with its amplitude doubled. Furthermore, filtered Q output signal **7011** and filtered inverted Q output signal **7013** may comprise substantially equal noise and DC offset contributions of the same polarity from prior down-conversion circuitry, including third UFD module **7010** and fourth UFD module **7014**, respectively. When second differential amplifier **7022** subtracts filtered inverted Q output signal **7013** from filtered Q output signal **7011**, these noise and DC offset contributions substantially cancel each other.

Additional embodiments relating to addressing DC offset and re-radiation concerns, applicable to the present invention, are described in co-pending Patent Application No., "DC Offset, Re-radiation, and I/Q Solutions Using Universal Frequency Translation Technology," Ser. No. 09/526,041, which is herein incorporated by reference in its entirety.

9.1.1 Example I/Q Modulation Control Signal Generator Embodiments

FIG. **70**B illustrates an exemplary block diagram for I/Q modulation control signal generator **7023**, according to an embodiment of the present invention. I/Q modulation control signal generator **7023** generates I control signal **7090**, inverted I control signal **7092**, Q control signal **7094**, and inverted Q control signal **7096** used by I/Q modulation receiver **7000** of FIG. **70**A. I control signal **7090** and inverted I control signal **7092** operate to down-convert the I-phase portion of an input I/Q modulated RF signal. Q control signal **7094** and inverted Q control signal **7096** act to down-convert the Q-phase portion of the input I/Q modulated RF signal. Furthermore, I/Q modulation control signal generator **7023** has the advantage of generating control signals in a manner such that resulting collective circuit re-radiation is radiated at one or more frequencies outside of the frequency range of interest. For instance, potential circuit re-radiation is radiated at a frequency substantially greater than that of the input RF carrier signal frequency.

I/Q modulation control signal generator **7023** comprises a local oscillator **7025**, a first divide-by-two module **7027**, a 180 degree phase shifter **7029**, a second divide-by-two module **7031**, a first pulse generator **7033**, a second pulse generator **7035**, a third pulse generator **7037**, and a fourth pulse generator **7039**.

Local oscillator **7025** outputs an oscillating signal **7015**. FIG. **70**C shows an exemplary oscillating signal **7015**.

First divide-by-two module **7027** receives oscillating signal **7015**, divides oscillating signal **7015** by two, and outputs a half frequency LO signal **7017** and a half frequency inverted LO signal **7041**. FIG. **70**C shows an exemplary half frequency LO signal **7017**. Half frequency inverted LO signal **7041** is an inverted version of half frequency LO signal **7017**. First divide-by-two module **7027** may be implemented in circuit logic, hardware, software, or any combination thereof, as would be known by persons skilled in the relevant art(s).

180 degree phase shifter **7029** receives oscillating signal **7015**, shifts the phase of oscillating signal **7015** by 180 degrees, and outputs phase shifted LO signal **7019**. 180 degree phase shifter **7029** may be implemented in circuit logic, hardware, software, or any combination thereof, as would be known by persons skilled in the relevant art(s). In alternative embodiments, other amounts of phase shift may be used.

Second divide-by two module **7031** receives phase shifted LO signal **7019**, divides phase shifted LO signal **7019** by two, and outputs a half frequency phase shifted LO signal **7021** and a half frequency inverted phase shifted LO signal **7043**. FIG. **70**C shows an exemplary half frequency phase shifted LO signal **7021**. Half frequency inverted phase shifted LO signal **7043** is an inverted version of half frequency phase shifted LO signal **7021**. Second divide-by-two module **7031** maybe implemented in circuit logic, hardware, software, or any combination thereof, as would be known by persons skilled in the relevant art(s).

First pulse generator **7033** receives half frequency LO signal **7017**, generates an output pulse whenever a rising edge is received on half frequency LO signal **7017**, and outputs I control signal **7090**. FIG. **70**C shows an exemplary I control signal **7090**.

Second pulse generator **7035** receives half frequency inverted LO signal **7041**, generates an output pulse whenever a rising edge is received on half frequency inverted LO signal **7041**, and outputs inverted I control signal **7092**. FIG. **70**C shows an exemplary inverted I control signal **7092**.

Third pulse generator **7037** receives half frequency phase shifted LO signal **7021**, generates an output pulse whenever a rising edge is received on half frequency phase shifted LO signal **7021**, and outputs Q control signal **7094**. FIG. **70**C shows an exemplary Q control signal **7094**.

Fourth pulse generator **7039** receives half frequency inverted phase shifted LO signal **7043**, generates an output pulse whenever a rising edge is received on half frequency inverted phase shifted LO signal **7043**, and outputs inverted Q control signal **7096**. FIG. **70**C shows an exemplary inverted Q control signal **7096**.

In an embodiment, control signals **7090**, **7021**, **7041** and **7043** include pulses having a width equal to one-half of a period of I/Q modulated RF input signal **7082**. The invention, however, is not limited to these pulse widths, and control signals **7090**, **7021**, **7041**, and **7043** may comprise pulse widths of any fraction of, or multiple and fraction of, a period of I/Q modulated RF input signal **7082**.

First, second, third, and fourth pulse generators **7033**, **7035**, **7037**, and **7039** may be implemented in circuit logic, hardware, software, or any combination thereof, as would be known by persons skilled in the relevant art(s).

As shown in FIG. **70**C, in an embodiment, control signals **7090**, **7021**, **7041**, and **7043** comprise pulses that are non-overlapping in other embodiments the pulses may overlap. Furthermore, in this example, pulses appear on these signals in the following order: I control signal **7090**, Q control signal **7094**, inverted I control signal **7092**, and inverted Q control signal **7096**. Potential circuit re-radiation from I/Q modulation receiver **7000** may comprise frequency components from a combination of these control signals.

For example, FIG. **70**D shows an overlay of pulses from I control signal **7090**, Q control signal **7094**, inverted I control signal **7092**, and inverted Q control signal **7096**. When pulses from these control signals leak through first, second, third, and/or fourth UFD modules **7002**, **7006**, **7010**, and **7014** to antenna **7072** (shown in FIG. **70**A), they may be radiated from I/Q modulation receiver **7000**, with a combined waveform that appears to have a primary frequency equal to four times the frequency of any single one of control signals **7090**, **7021**, **7041**, and **7043**. FIG. **70** shows an example combined control signal **7045**.

FIG. **70**D also shows an example I/Q modulation RF input signal **7082** overlaid upon control signals **7090**, **7094**, **7092**, and **7096**. As shown in FIG. **70**D, pulses on I control signal **7090** overlay and act to down-convert a positive I-phase portion of I/Q modulation RF input signal **7082**. Pulses on inverted I control signal **7092** overlay and act to down-convert a negative I-phase portion of I/Q modulation RF input signal **7082**. Pulses on Q control signal **7094** overlay and act to down-convert a rising Q-phase portion of I/Q modulation RF input signal **7082**. Pulses on inverted Q control signal **7096** overlay and act to down-convert a falling Q-phase portion of I/Q modulation RF input signal **7082**.

As FIG. **70**D further shows in this example, the frequency ratio between the combination of control signals **7090**, **7021**, **7041**, and **7043** and I/Q modulation RF input signal **7082** is approximately 4:3. Because the frequency of the potentially re-radiated signal, i.e., combined control signal **7045**, is substantially different from that of the signal being down-converted, i.e., I/Q modulation RF input signal **7082**, it does not interfere with signal down-conversion as it is out of the frequency band of interest, and hence may be filtered out. In this manner, I/Q modulation receiver **7000** reduces problems due to circuit re-radiation. As will be understood by persons skilled in the relevant art(s) from the teachings herein, frequency ratios other than 4:3 may be implemented to achieve similar reduction of problems of circuit re-radiation.

It should be understood that the above control signal generator circuit example is provided for illustrative purposes only. The invention is not limited to these embodiments. Alternative embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein) for I/Q modulation control signal generator **7023** will be apparent to persons skilled in the relevant art(s) from the teachings herein, and are within the scope of the present invention.

Additional embodiments relating to addressing DC offset and re-radiation concerns, applicable to the present invention, are described in co-pending patent application titled "DC Offset, Re-radiation, and I/Q Solutions Using Universal Frequency Translation Technology," which is herein incorporated by reference in its entirety.

9.1.2 Detailed Example I/Q Modulation Receiver Embodiment with Exemplary Waveforms

FIG. **70**E illustrates a more detailed example circuit implementation of I/Q modulation receiver **7000**, according

to an embodiment of the present invention. FIGS. **70**F–P show example waveforms related to an example implementation of I/Q modulation receiver **7000** of FIG. **70**E.

FIGS. **70**F and **70**G show first and second input data signals **7047** and **7049** to be I/Q modulated with a RF carrier signal frequency as the I-phase and Q-phase information signals, respectively.

FIGS. **70**I and **70**J show the signals of FIGS. **70**F and **70**G after modulation with a RF carrier signal frequency, respectively, as I-modulated signal **7051** and Q-modulated signal **7053**.

FIG. **70**H shows an I/Q modulation RF input signal **7082** formed from I-modulated signal **7051** and Q-modulated signal **7053** of FIGS. **70**I and **70**J, respectively.

FIG. **70**O shows an overlaid view of filtered I output signal **7007** and filtered inverted I output signal **7009**.

FIG. **70**P shows an overlaid view of filtered Q output signal **7011** and filtered inverted Q output signal **7013**.

FIGS. **70**K and **70**L show I baseband output signal **7084** and Q baseband output signal **7086**, respectfully. A data transition **7055** is indicated in both I baseband output signal **7084** and Q baseband output signal **7086**. The corresponding data transition **7055** is indicated in I-modulated signal **7051** of FIG. **70**I, Q-modulated signal **7053** of FIG. **70**J, and I/Q modulation RF input signal **7082** of FIG. **70**H.

FIGS. **70**M and **70**N show I baseband output signal **7084** and Q baseband output signal **7086** over a wider time interval.

9.2 Example Single Channel Receiver Embodiment

FIG. **70**Q illustrates an example single channel receiver **7091**, corresponding to either the I or Q channel of I/Q modulation receiver **7000**, according to an embodiment of the present invention. Single channel receiver **7091** can down-convert an input RF signal **7097** modulated according to AM, PM, FM, and other modulation schemes. Refer to section 7.4.1 above for further description on the operation of single channel receiver **7091**.

9.3 Alternative Example I/Q Modulation Receiver Embodiment

FIG. **70**R illustrates an exemplary I/Q modulation receiver **7089**, according to an embodiment of the present invention. I/Q modulation receiver **7089** receives, down-converts, and demodulates an I/Q modulated RF input signal **7082** to an I baseband output signal **7084**, and a Q baseband output signal **7086**. I/Q modulation receiver **7089** has additional advantages of reducing or eliminating unwanted DC offsets and circuit re-radiation, in a similar fashion to that of I/Q modulation receiver **7000** described above.

10. Shunt Transceiver Embodiments Using UFT Modules

In this section, example transceiver embodiments are presented that utilize UFT modules in a shunt configuration for balanced up-conversion and balanced down-conversion. More specifically,

a signal channel transceiver embodiment is presented that incorporates the balanced transmitter **5600** (FIG. **56**A) and the receiver **7091** (FIG. **70**Q). Additionally, an IQ transceiver embodiment is presented that incorporate balanced IQ transmitter **5700** (FIG. **57**) and IQ receiver **7000** (FIG. **70**A). These transceiver embodiments incorporate the advantages described above for the balanced transmitter **5600** and the balanced receiver **7091**. More specifically, during up-conversion, an input baseband signal is up-converted in a balanced and differential fashion, so as to minimize carrier insertion and unwanted spectral growth. Additionally, during down-conversion, an input RF input signal is down-converted so that DC offset and re-radiation is reduced or eliminated. Additionally, since both transmitter and receiver utilize UFT modules for frequency translation, integration and cost saving can be realized.

These embodiments are described herein for purposes of illustration, and not limitation. The invention is not limited to these embodiments. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein) will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

FIG. **71** illustrates a transceiver **7100** according to embodiments of the present invention. Transceiver **7100** includes the single channel receiver **7091**, the balanced transmitter **5600**, a diplexer **7108**, and an antenna **7112**. Transceiver **7100** up-converts a baseband input signal **7110** using the balanced transmitter **5600** resulting in an output RF signal **7106** that is radiated by the antenna **7112**. Additionally, the transceiver **7100** also down-converts a received RF input signal **7104** using the receiver **7091** to output baseband signal **7102**. The diplexer **7108** separates the transmit signal **7106** from the receive signal **7104** so that the same antenna **7112** can be used for both transmit and receive operations. The operation of transmitter **5600** is described above in section 7.1.3, to which the reader is referred for greater detail.

During up-conversion, the transmitter **5600** shunts the input baseband signal **7110** to ground in a differential and balanced fashion according to the control signals **2623** and **2627**, resulting in the harmonically rich signal **7114**. The harmonically rich signal **7114** includes multiple harmonic images that repeat at harmonics of the sampling frequency of the control signals, where each harmonic image contains the necessary amplitude, frequency, and phase information to reconstruct the baseband signal **7110**. The optional filter **2606** can be included to select a desired harmonic from the harmonically rich signal **7114**. The optional amplifier **2608** can be included to amplify the desired harmonic resulting in the output RF signal **7106**, which is transmitted by antenna **7112** after the diplexer **7108**. A detailed description of the transmitter **5600** is included in section 7.1.3, to which the reader is referred for further details.

During down-conversion, the receiver **7091** alternately shunts the received RF signal **7104** to ground according to control signals **7093** and **7095**, resulting in the down-converted output signal **7102**. A detailed description of receiver **7091** is included in sections 9.1 and 9.2, to which the reader is referred for further details.

FIG. **72** illustrates IQ transceiver **7200** according to embodiments of the present invention. IQ transceiver **7200** includes the IQ receiver **7000**, the IQ transmitter **5700**, a diplexer **7214**, and an antenna **7216**. Transceiver **7200** up-converts an I baseband signal **7206** and a Q baseband signal **7208** using the IQ transmitter **5700** (FIG. **57**) to generate an IQ RF output signal **7212**. A detailed description of the IQ transmitter **5700** is included in section 7.2.2, to which the reader is referred for further details. Additionally, the transceiver **7200** also down-converts a received RF signal **7210** using the IQ Receiver **7000**, resulting in I baseband output signal **7202** and a Q baseband output signal **7204**. A detailed description of the IQ receiver **7000** is included in section 9.1, to which the reader is referred for further details.

11. Conclusion

Example implementations of the methods, systems and components of the invention have been described herein. As noted elsewhere, these example implementations have been described for illustrative purposes only, and are not limiting.

Other implementation embodiments are possible and covered by the invention, such as but not limited to software and software/hardware implementations of the systems and components of the invention. Such implementation embodiments will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein.

While various application embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments.

What is claimed is:

1. A method of up-converting a baseband signal, comprising the steps of:

(1) receiving a baseband signal and an inverted baseband signal;

(2) adding a common reference voltage to the baseband signal and the inverted baseband signal, to generate a first combined signal and a second combined signal, respectively;

(2) shunting said first combined signal to ground according to a first control signal to generate a first harmonically rich signal;

(3) shunting said second combined signal to ground according to said second control signal to generate a second harmonically rich signal, wherein said second control signal is phase shifted approximately 180 degrees relative to said first control signal so that second combined signal is not shunted to ground simultaneous with said first combined signal; and

(4) combining said first harmonically rich signal and said second harmonically rich signal to generate a third harmonically rich signal having harmonic images that are representative of said baseband signal;

wherein said pulses of said first and second control signals have a pulse width of T_A, and wherein an amplitude of said harmonics in said third harmonically rich signal are based on $n*(T_A/T_S)$, where T_S is a period of said first and second control signal, and n is a harmonic number of said harmonic.

2. The method of claim **1**, wherein said pulses of said first and second control signals have a pulse width of T_A, and wherein an amplitude of said harmonics in said third harmonically rich signal are represented by the following equation:

$$Amp_n = \left[\frac{4\sin\left(\frac{n\pi T_A}{T_s}\right)\cdot\sin\left(\frac{n\pi}{2}\right)}{n\pi}\right]$$

wherein: T_S=period of said first and second control signals;

T_A=pulse width of said first and second control signals; and

n=harmonic number of said harmonic image whose amplitude is determined.

3. An apparatus for transmitting a baseband signal, said apparatus comprising:

a buffer/inverter, for receiving said baseband signal and generating an inverted baseband signal;

a first controlled switch, coupled to an output of said buffer/inverter, said first controlled switch shunting said baseband signal to ground according to a first control signal, and resulting in a first harmonically rich signal;

a second controlled switch, coupled to a second output of said buffer/inverter, said second controlled switch shunting said inverted baseband signal to ground according to a second control signal, and resulting in a second harmonically rich signal; and

a combiner, coupled to an output of said first controlled switch and an output of said second controlled switch, said combiner combining said first harmonically rich signal and said second harmonically rich signal, resulting in an third harmonically rich signal;

wherein said first control signal and said second control signal comprises pulses having a pulse width T_A;

wherein said first control signal and said second control signal are phase shifted with respect to each other.

4. The apparatus of claim **3**, wherein:

said first controlled switch comprises a first field effect transistor (FET), a gate of said first FET coupled to said first control signal, a source of said first FET receiving said baseband signal and outputting said first harmonically rich signal, and a drain of said first FET coupled to ground; and

said second controlled switch comprises a second field effect transistor (FET), a gate of said second FET coupled to said second control signal, a source of said second FET receiving said inverted baseband signal and outputting said second harmonically rich signal, and a drain of said second FET coupled to ground.

5. The apparatus of claim **4**, wherein said first FET and said second FET alternately shunt said baseband signal baseband and said inverted baseband signal to ground, respectively, according to said first control signal and said second control signal, to generate said harmonically rich signals.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 6,853,690 B1
APPLICATION NO. : 09/525615
DATED : February 8, 2005
INVENTOR(S) : Sorrells et al.

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title page should be deleted and substitute therefor the attached title page as shown on the attached title page.

Drawings
Please replace all of the drawings with the attached 144 pages of formal drawings.

Column 5
In line 65, please replace "FIGS. 55A-D illustrates" with --FIGS. 55A-D, which includes FIGs. 55A, FIGs. 55B1-55B4, FIGs. 55C1-55C3, and FIG. 55D, illustrates--.

In line 67, after "invention;", please insert -- FIGs. 55B1-55B4 should be referred to for all references to FIG. 55B in the specification; FIGs. 55C1-55C3 should be referred to for all references to FIG. 55C in the specification; --.

Column 6
In line 45, please replace "FIG. 70A illustrates" with -- FIG. 70A, which includes FIG. 70A1 and FIG. 70A2, illustrates --.

In line 46, after "invention,", please insert -- FIGs. 70A1 and 70A2 should be referred to for all references to FIG. 70 in the specification; --.

In line 52, please replace "FIG. 70E illustrates" with -- FIG. 70E, which includes FIG. 70E1 and 70E2, illustrates --.

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION


PATENT NO. : 6,853,690 B1
APPLICATION NO. : 09/525615
DATED : February 8, 2005
INVENTOR(S) : Sorrells et al.

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 6 (continued)
In line 53, after "invention;", please insert -- FIGs. 70E1 and 70E2 should be referred to for all references to FIG. 70 in the specification; --.

Signed and Sealed this

Twenty-second Day of January, 2008



JON W. DUDAS
Director of the United States Patent and Trademark Office

(12) **United States Patent**
Sorrells et al.

(10) **Patent No.: US 6,853,690 B1**
(45) **Date of Patent: Feb. 8, 2005**

(54) **METHOD, SYSTEM AND APPARATUS FOR BALANCED FREQUENCY UP-CONVERSION OF A BASEBAND SIGNAL AND 4-PHASE RECEIVER AND TRANSCEIVER EMBODIMENTS**

(75) Inventors: **David F. Sorrells**, Jacksonville, FL (US); **Michael J. Bultman**, Jacksonville, FL (US); **Robert W. Cook**, Switzerland, FL (US); **Richard C. Looke**, Jacksonville, FL (US); **Charley D. Moses, Jr.**, Jacksonville, FL (US); **Gregory S. Rawlins**, Lake Mary, FL (US); **Michael W. Rawlins**, Lake Mary, FL (US)

(73) Assignee: **ParkerVision, Inc.**, Jacksonville, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/525,615**

(22) Filed: **Mar. 14, 2000**

Related U.S. Application Data

(60) Provisional application No. 60/177,381, filed on Jan. 24, 2000, provisional application No. 60/171,502, filed on Dec. 22, 1999, provisional application No. 60/177,705, filed on Jan. 24, 2000, provisional application No. 60/129,839, filed on Apr. 16, 1999, provisional application No. 60/158,047, filed on Oct. 7, 1999, provisional application No. 60/171,349, filed on Dec. 21, 1999, provisional application No. 60/177,702, filed on Jan. 24, 2000, provisional application No. 60/180,667, filed on Feb. 7, 2000, and provisional application No. 60/171,496, filed on Dec. 22, 1999.

(51) **Int. Cl.**[7] **H04L 27/04**; H04L 27/12; H04L 27/20

(52) **U.S. Cl.** **375/295**; 375/298; 375/259; 375/256; 455/76; 455/91

(58) **Field of Search** 375/295–296, 375/298, 309–312, 256, 259, 268; 455/118, 323, 313, 76, 91

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,132,952 A 1/1979 Hongu et al.

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

DE 196 48 915 A1 6/1998

OTHER PUBLICATIONS

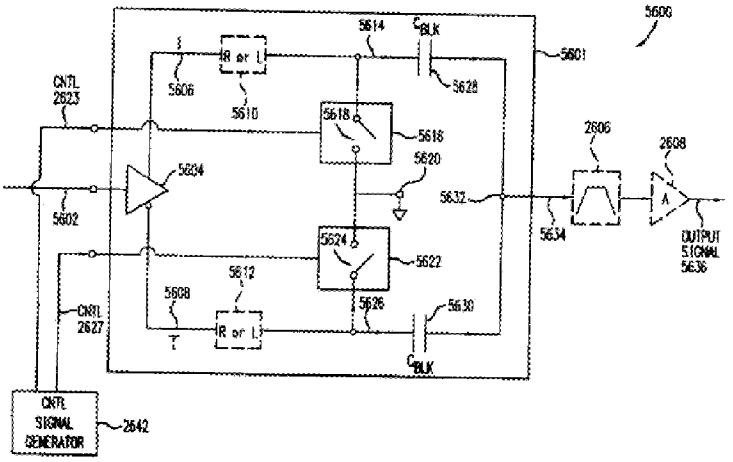
Simoni, A. et al., "A Single-Chip Optical Sensor with Analog Memory for Motion Detection," *IEEE Journal of Solid-State Circuits*, IEEE, vol. 30, No. 7, pp. 800–806 (Jul. 1995).

(List continued on next page.)

Primary Examiner—Phuong Phu
(74) *Attorney, Agent, or Firm*—Sterne, Kessler, Goldstein & Fox PLLC

(57) **ABSTRACT**

A balanced transmitter up-converts a baseband signal directly from baseband-to-RF. The up-conversion process is sufficiently linear that no IF processing is required, even in communications applications that have stringent requirements on spectral growth. In operation, the balanced modulator sub-harmonically samples the baseband signal in a balanced and differential manner, resulting in harmonically rich signal. The harmonically rich signal contains multiple harmonic images that repeat at multiples of the sampling frequency, where each harmonic contains the necessary information to reconstruct the baseband signal. The differential sampling is performed according to a first and second control signals that are phase shifted with respect to each other. In embodiments of the invention, the control signals have pulse widths (or apertures) that operate to improve energy transfer to a desired harmonic in the harmonically rich signal. A bandpass filter can then be utilized to select the desired harmonic of interest from the harmonically rich signal. The sampling modules that perform the sampling can



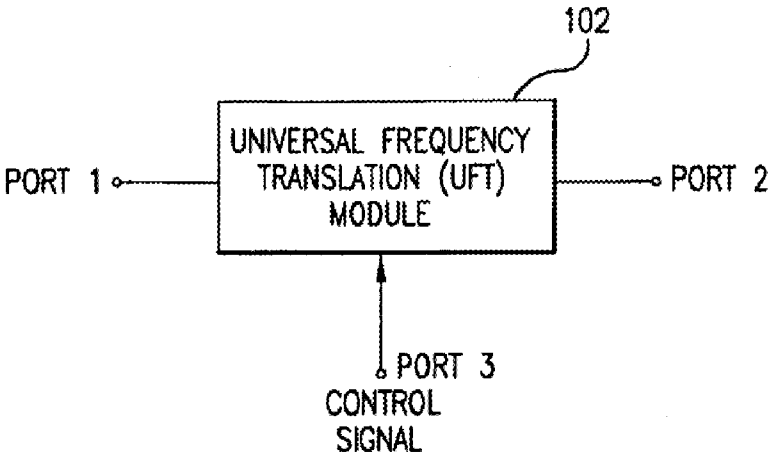

102
UNIVERSAL FREQUENCY TRANSLATION (UFT) MODULE
PORT 1
PORT 2
PORT 3
CONTROL SIGNAL

FIG. 1A

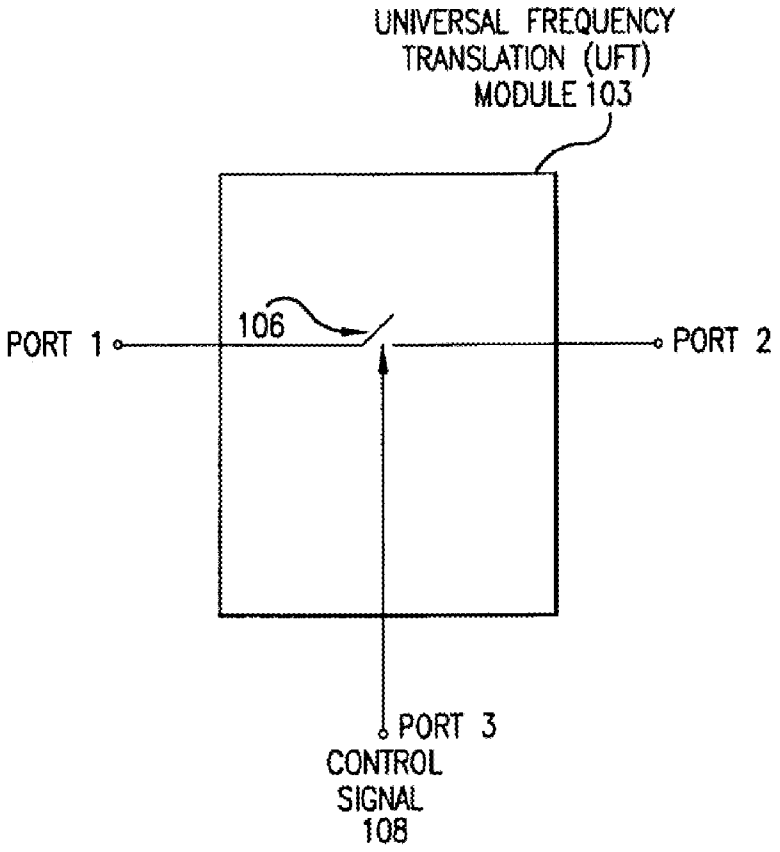

UNIVERSAL FREQUENCY TRANSLATION (UFT) MODULE 103
106
PORT 1
PORT 2
PORT 3
CONTROL SIGNAL 108

FIG. 1B

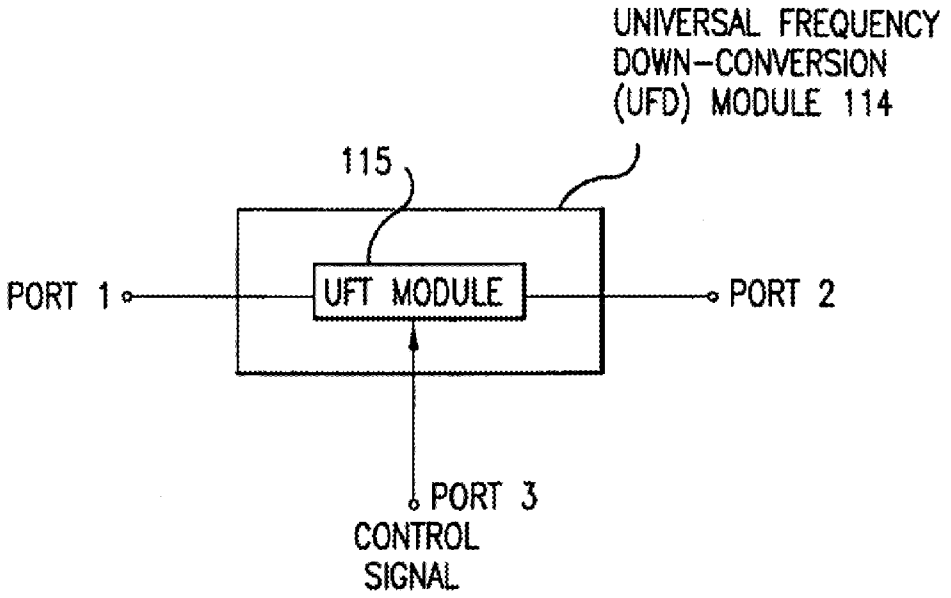

UNIVERSAL FREQUENCY
DOWN-CONVERSION
(UFD) MODULE 114
115
UFT MODULE
PORT 1
PORT 2
PORT 3
CONTROL
SIGNAL

FIG. 1C

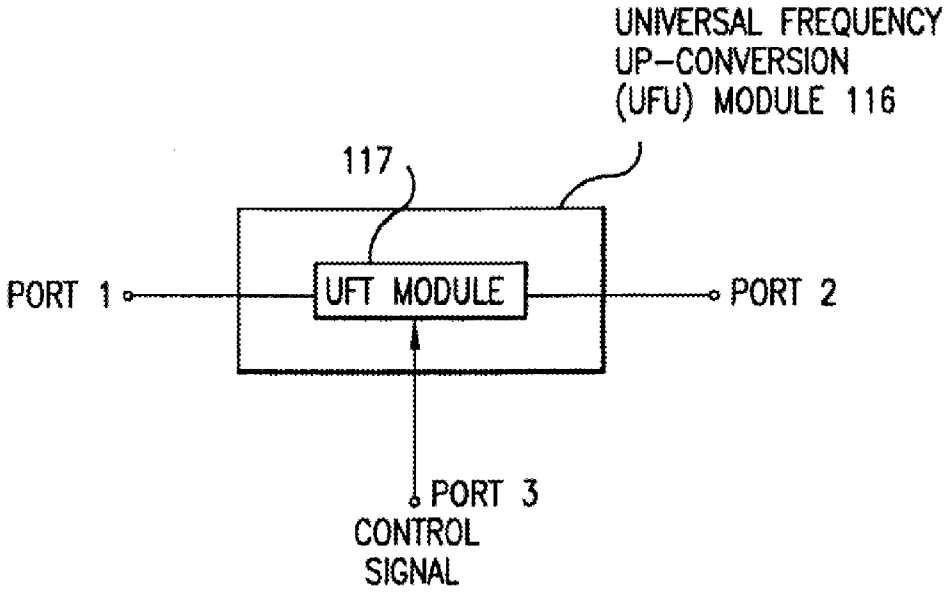

UNIVERSAL FREQUENCY
UP-CONVERSION
(UFU) MODULE 116
117
UFT MODULE
PORT 1
PORT 2
PORT 3
CONTROL
SIGNAL

FIG. 1D

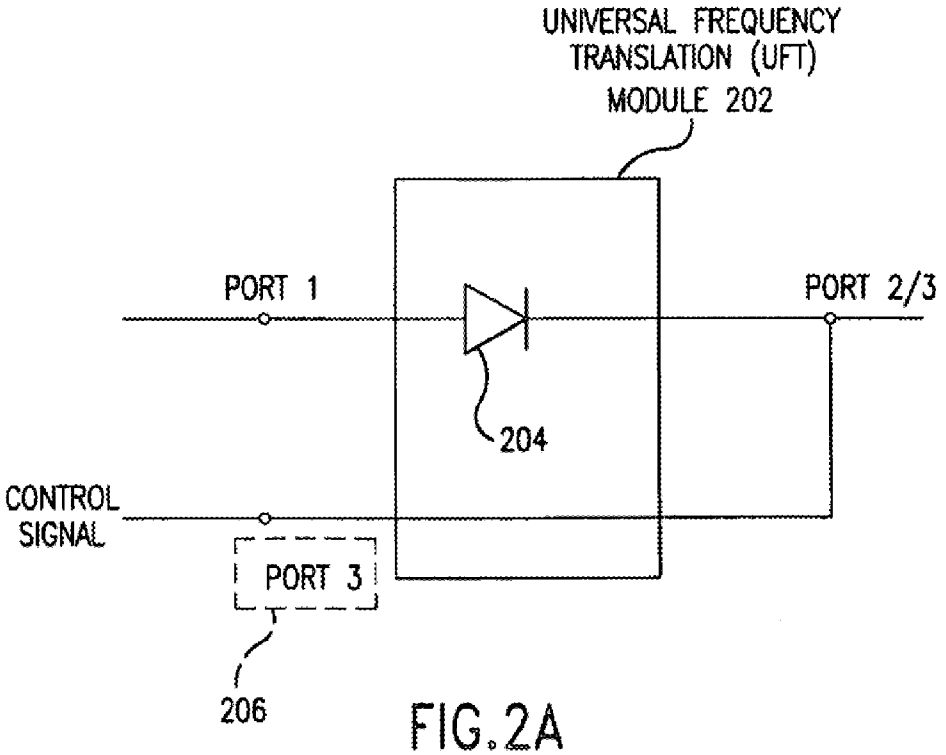

UNIVERSAL FREQUENCY
TRANSLATION (UFT)
MODULE 202
PORT 1
PORT 2/3
204
CONTROL
SIGNAL
PORT 3
206

FIG.2A

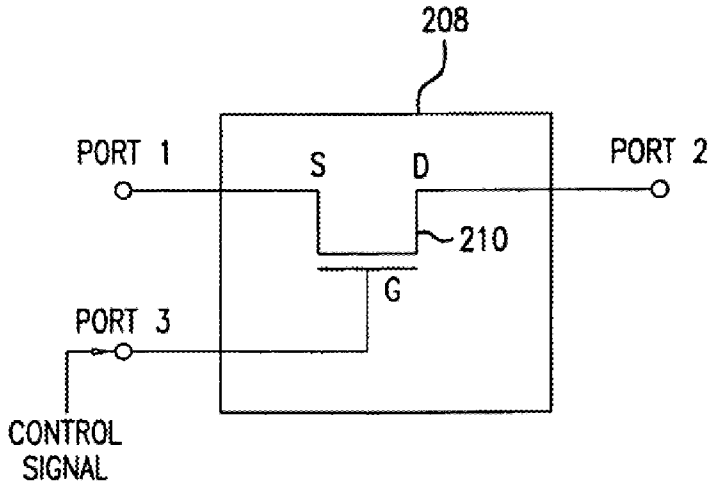

208
PORT 1
S
D
PORT 2
210
G
PORT 3
CONTROL
SIGNAL

FIG.2B

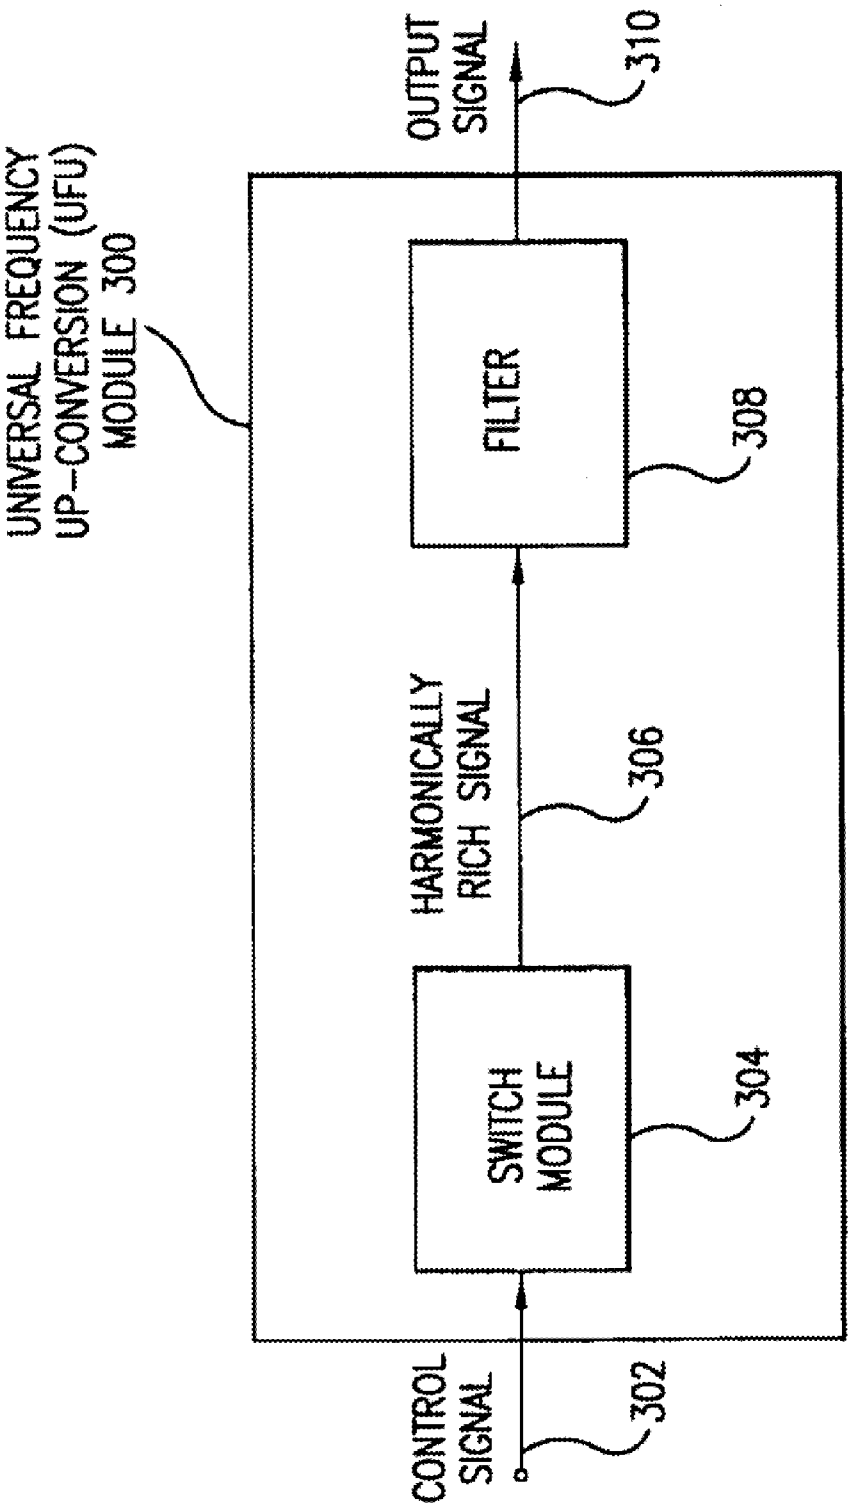

UNIVERSAL FREQUENCY
UP-CONVERSION (UFU)
MODULE 300
OUTPUT
SIGNAL
310
FILTER
308
HARMONICALLY
RICH SIGNAL
306
SWITCH
MODULE
304
CONTROL
SIGNAL
302

FIG. 3

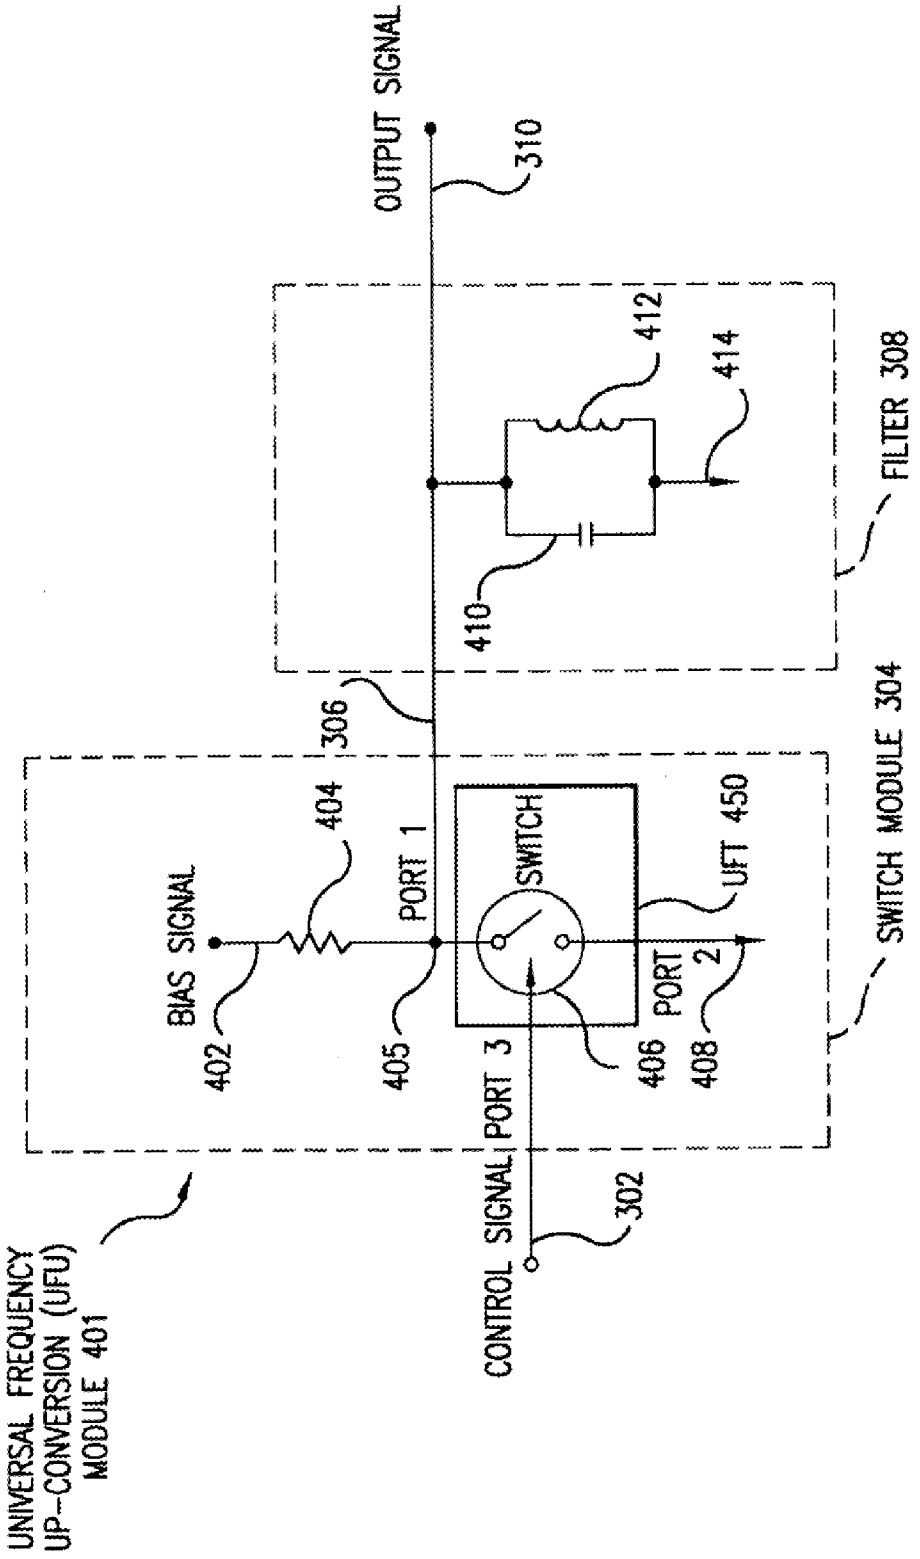

OUTPUT SIGNAL
310
412
414
FILTER 308
410
306
SWITCH MODULE 304
404
BIAS SIGNAL
PORT 1
SWITCH
UFT 450
402
405
406
PORT 2
408
PORT 3
CONTROL SIGNAL
302
UNIVERSAL FREQUENCY UP-CONVERSION (UFU) MODULE 401

FIG. 4

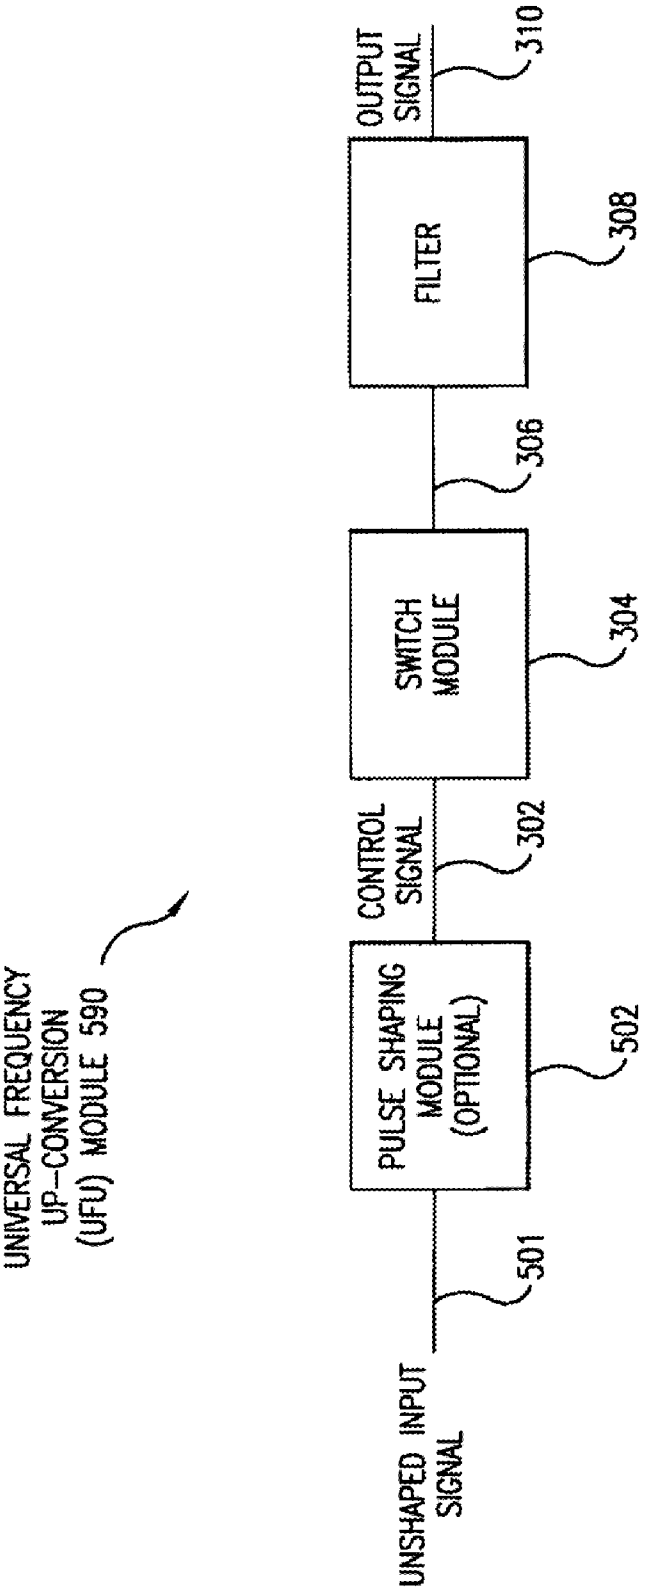

UNIVERSAL FREQUENCY UP-CONVERSION (UFU) MODULE 590
UNSHAPED INPUT SIGNAL
501
PULSE SHAPING MODULE (OPTIONAL)
502
CONTROL SIGNAL
302
SWITCH MODULE
304
306
FILTER
308
OUTPUT SIGNAL
310

FIG. 5

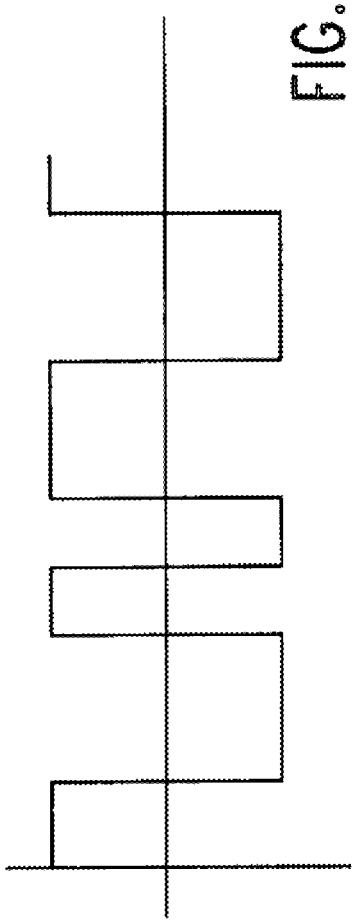


FIG. 6A

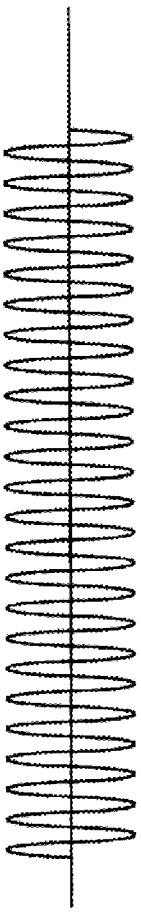


FIG. 6B

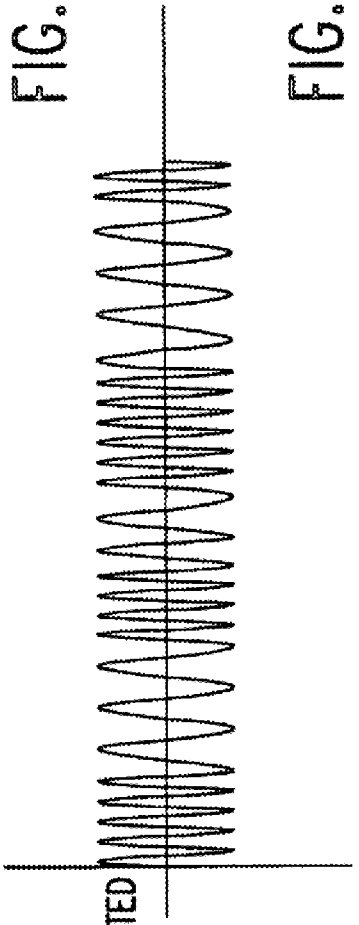


FIG. 6C

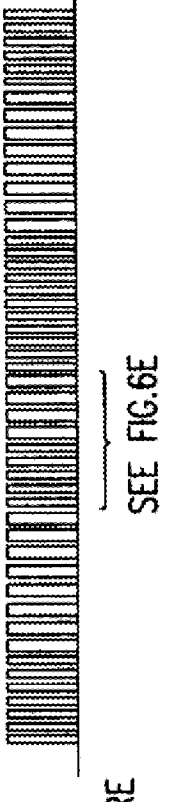


FIG. 6D

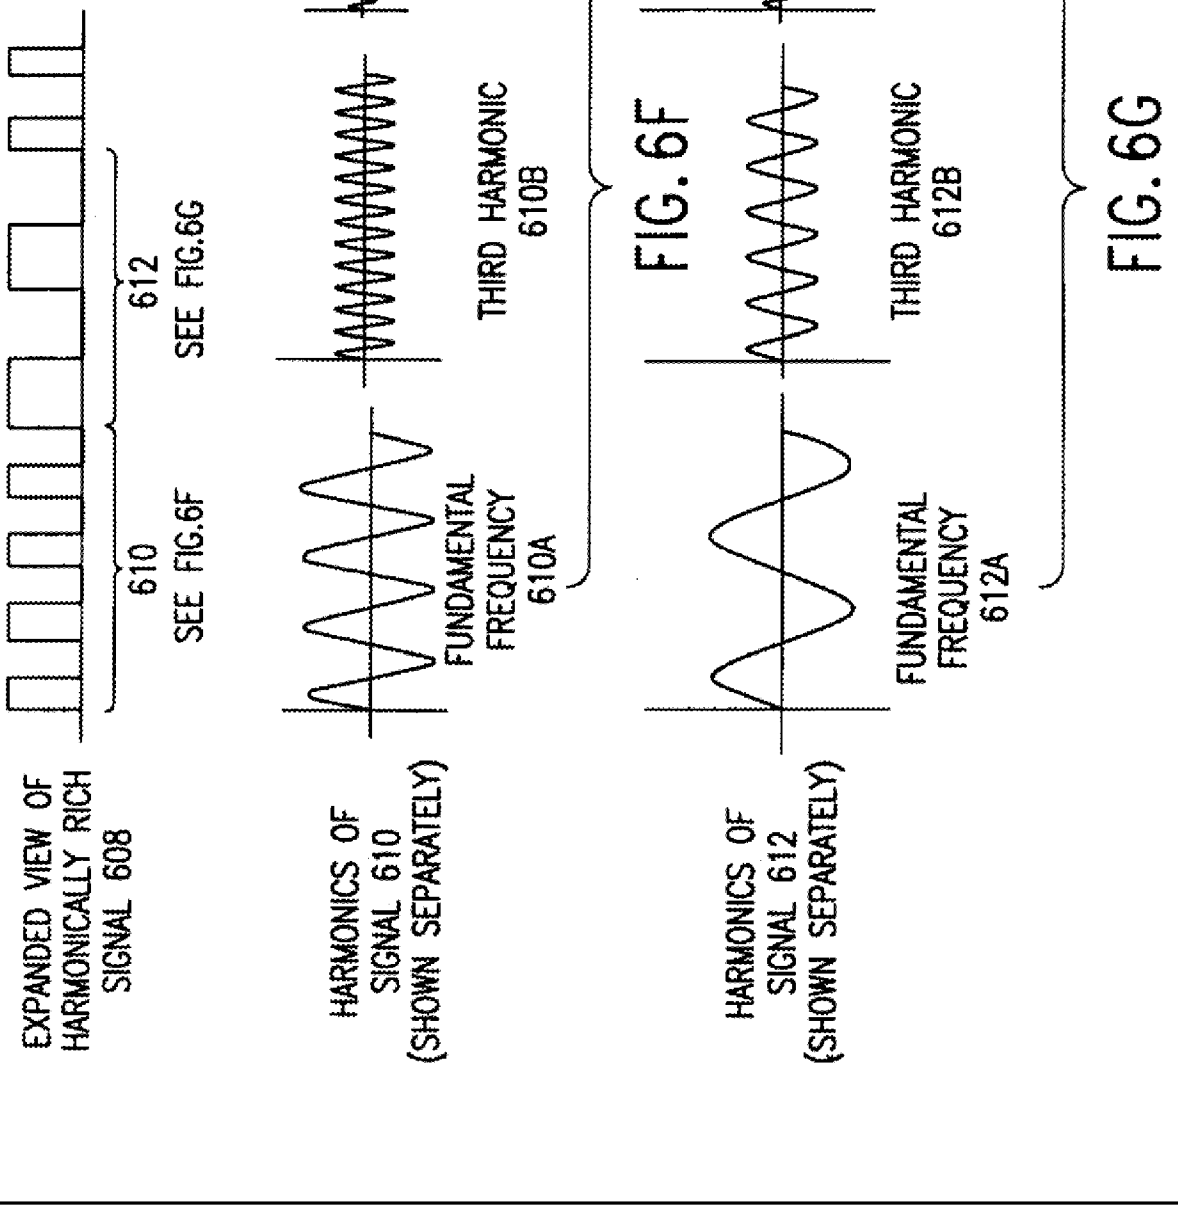


FIG. 6E

FIG. 6F

FIG. 6G

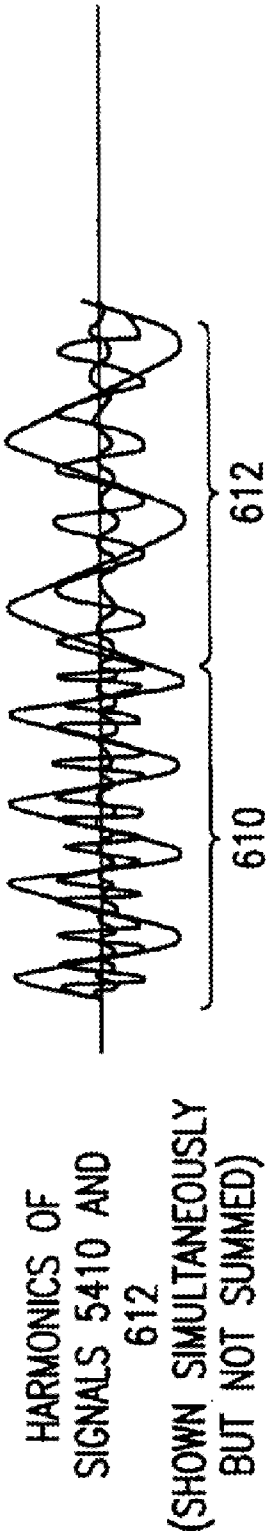

HARMONICS OF
SIGNALS 5410 AND
612
(SHOWN SIMULTANEOUSLY
BUT NOT SUMMED)
610
612

FIG. 6H

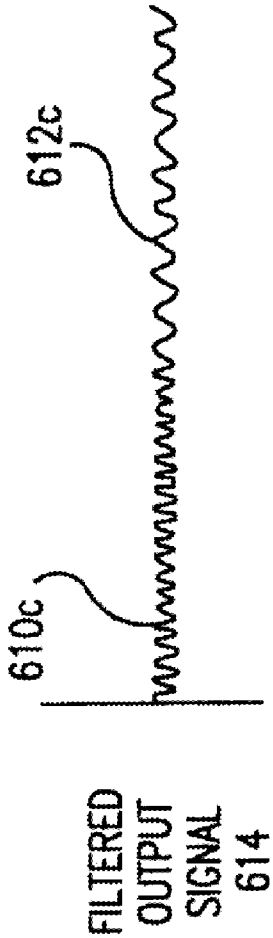

610c
612c
FILTERED
OUTPUT
SIGNAL
614

FIG. 6I

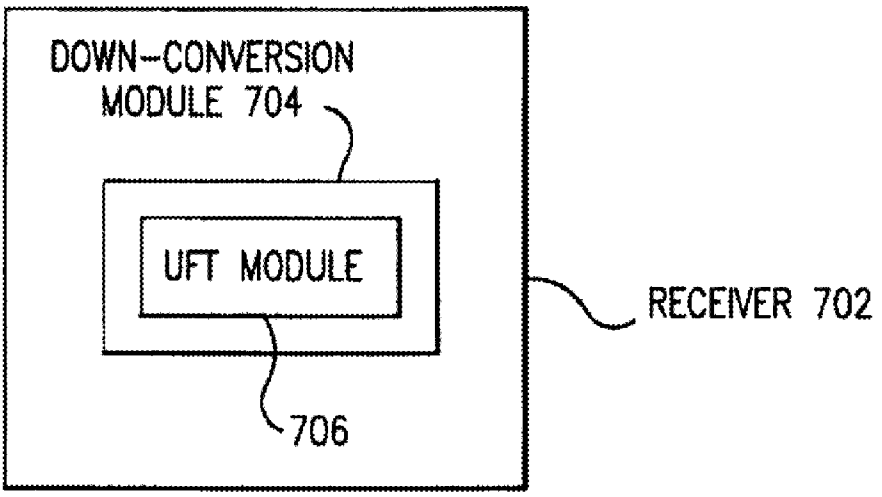

DOWN-CONVERSION MODULE 704
UFT MODULE
706
RECEIVER 702

FIG. 7

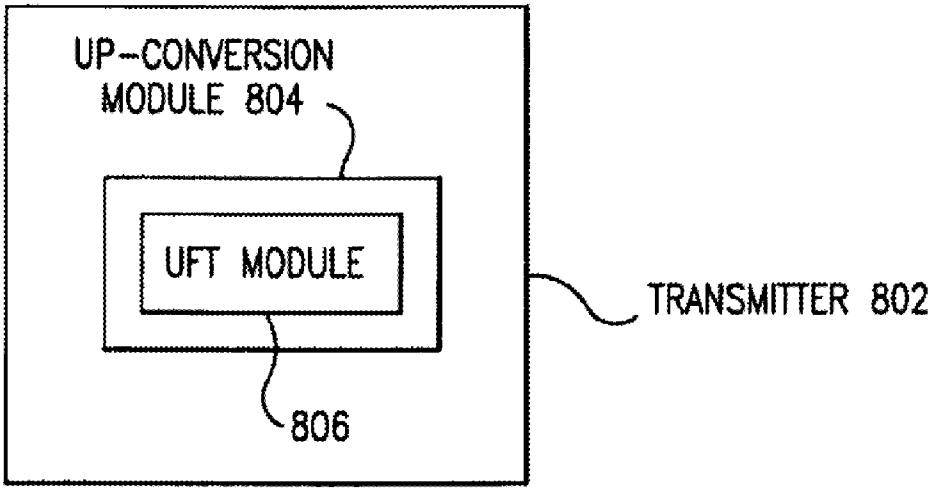

UP-CONVERSION MODULE 804
UFT MODULE
806
TRANSMITTER 802

FIG. 8

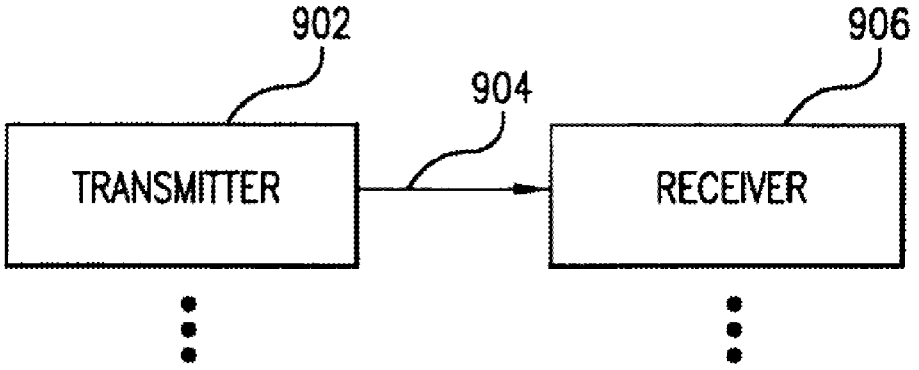

902
904
906
TRANSMITTER
RECEIVER

FIG. 9

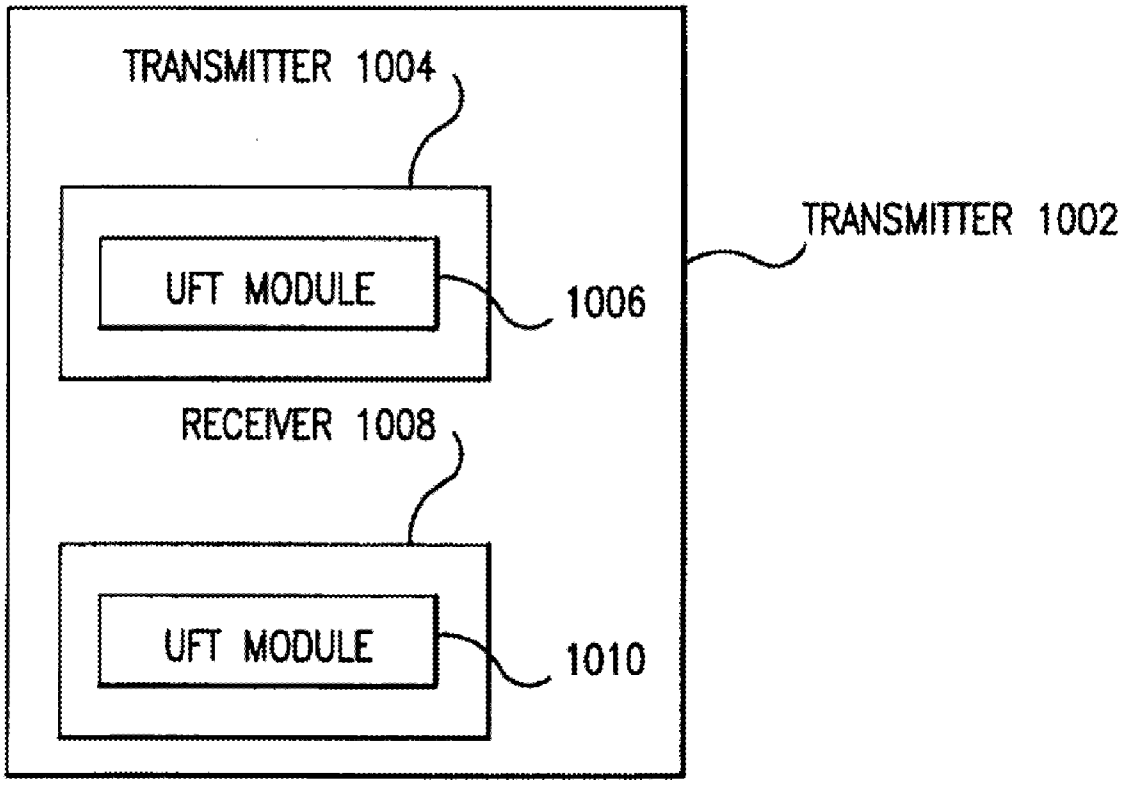

TRANSMITTER 1004
UFT MODULE
1006
TRANSMITTER 1002
RECEIVER 1008
UFT MODULE
1010

FIG. 10

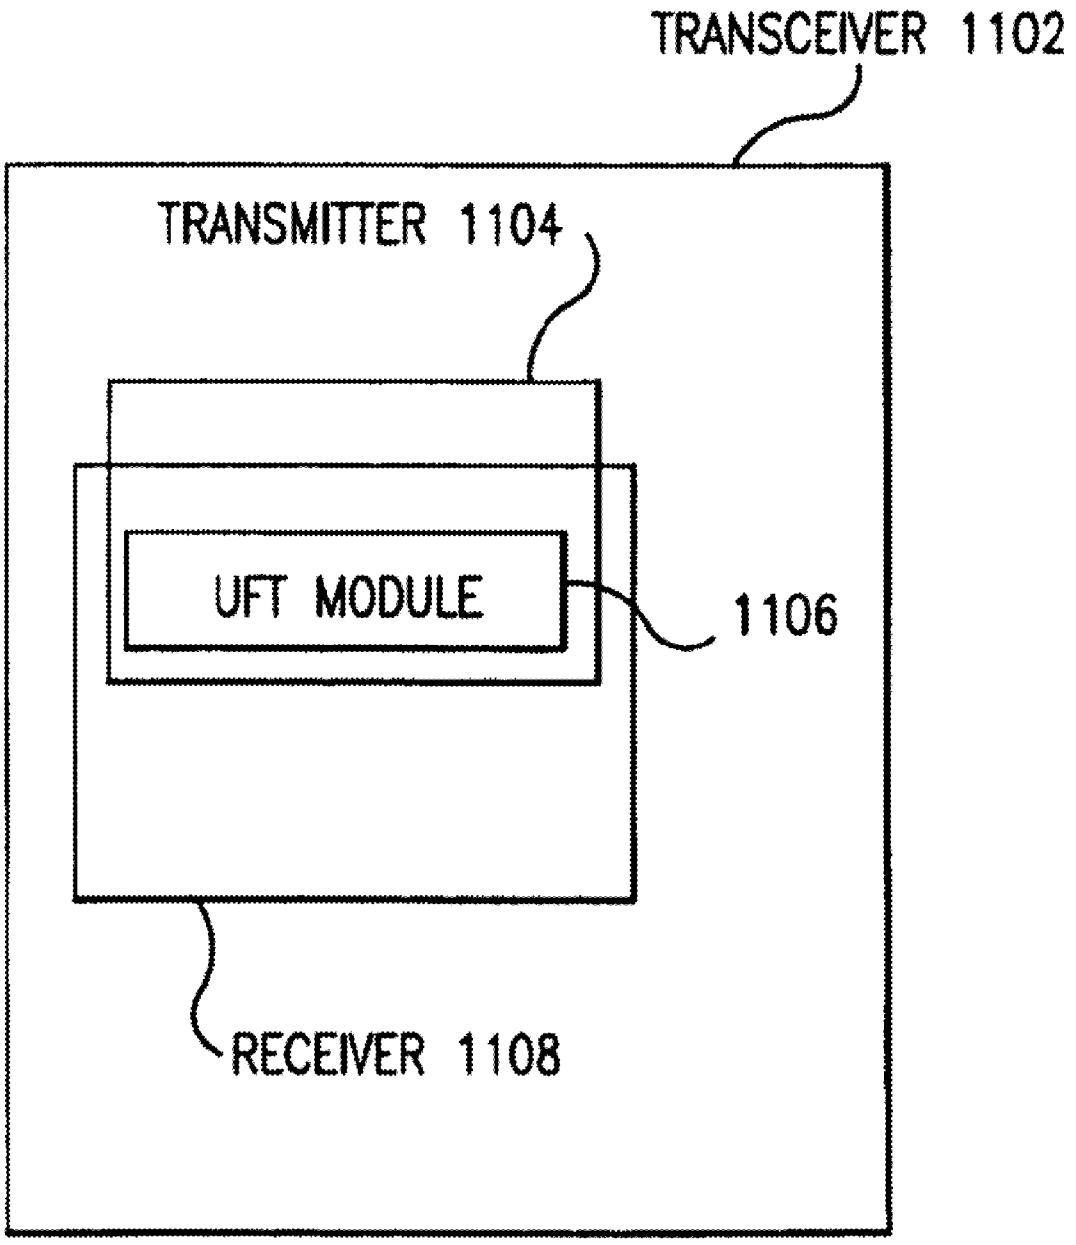

TRANSCEIVER 1102
TRANSMITTER 1104
UFT MODULE
1106
RECEIVER 1108

FIG. 11

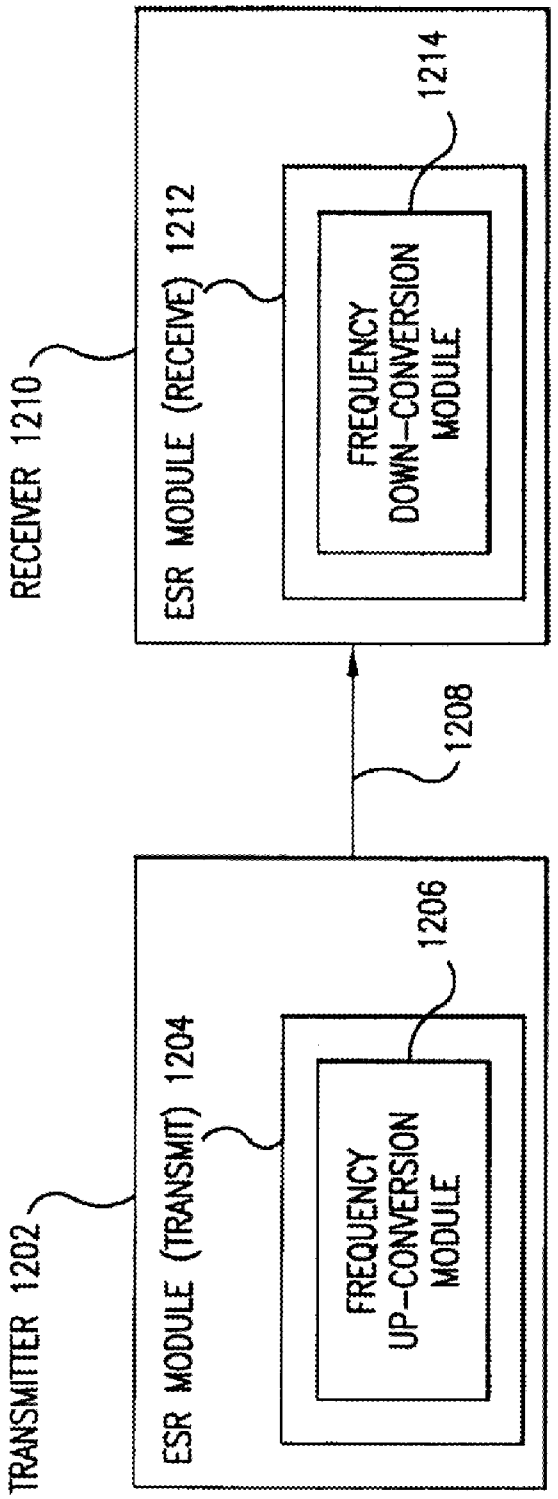

TRANSMITTER 1202
ESR MODULE (TRANSMIT) 1204
FREQUENCY UP-CONVERSION MODULE
1206
1208
RECEIVER 1210
ESR MODULE (RECEIVE) 1212
FREQUENCY DOWN-CONVERSION MODULE
1214

FIG. 12

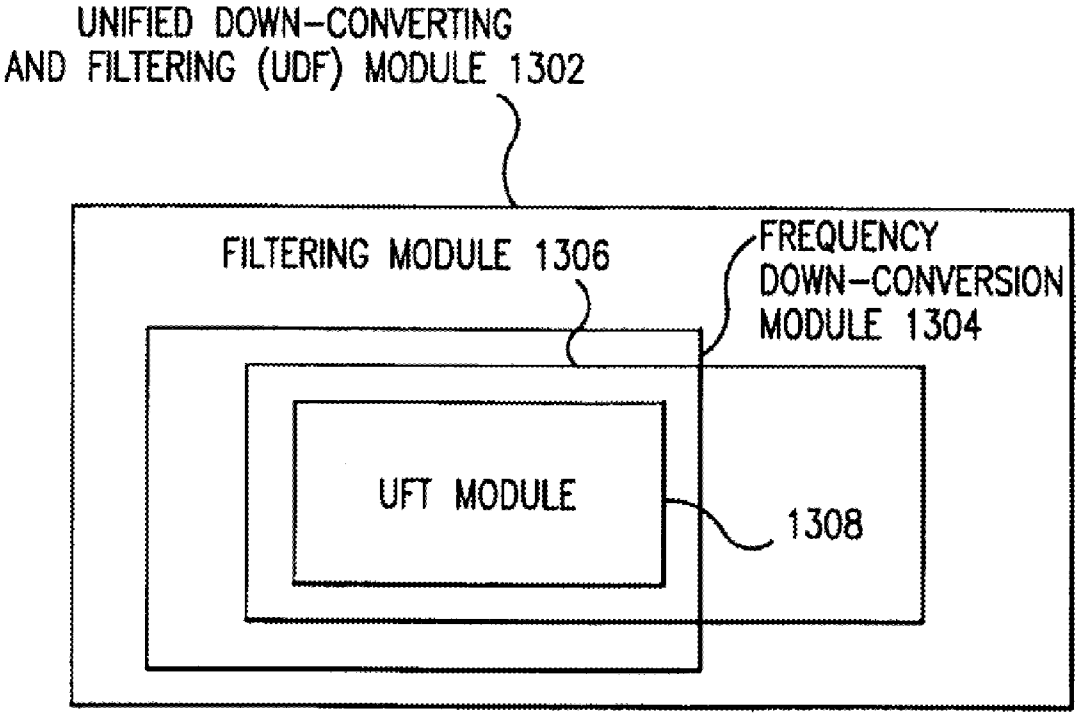

UNIFIED DOWN-CONVERTING
AND FILTERING (UDF) MODULE 1302
FILTERING MODULE 1306
FREQUENCY
DOWN-CONVERSION
MODULE 1304
UFT MODULE
1308

FIG. 13

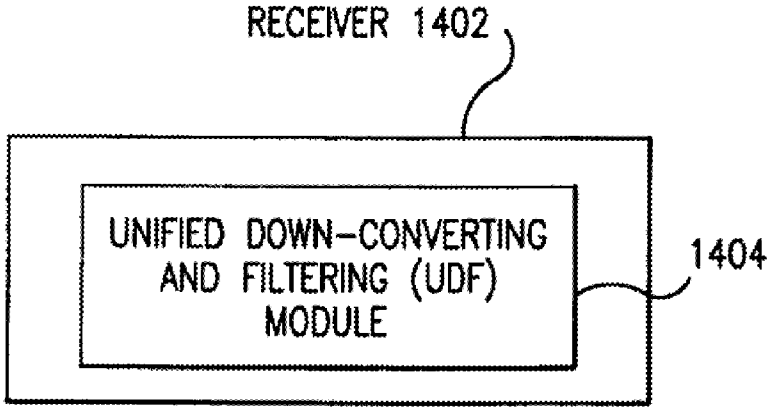

RECEIVER 1402
UNIFIED DOWN-CONVERTING
AND FILTERING (UDF)
MODULE
1404

FIG. 14

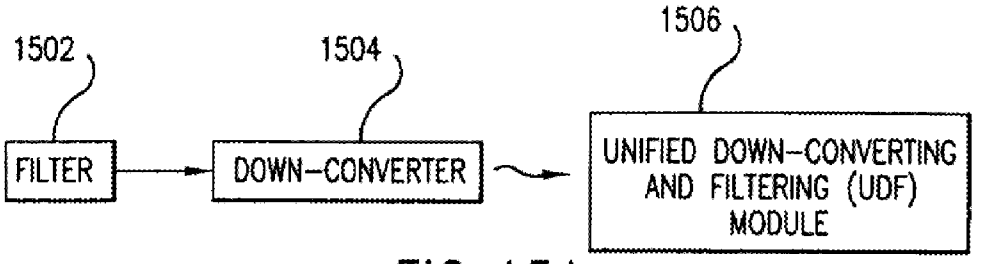


FIG. 15A

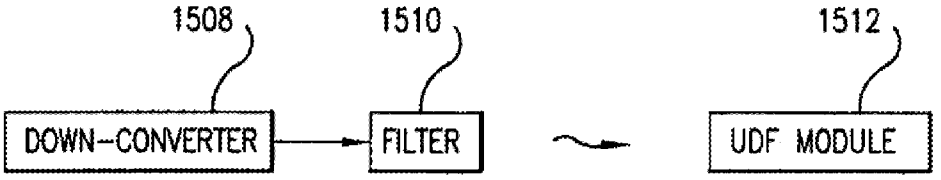


FIG. 15B

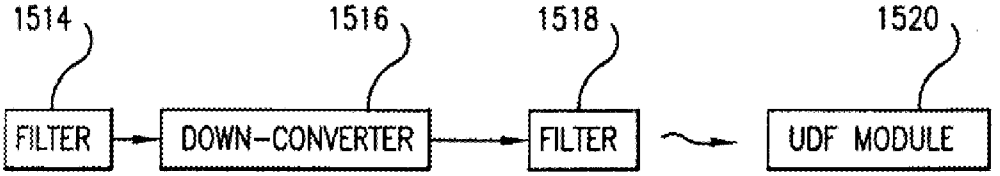


FIG. 15C



FIG. 15D

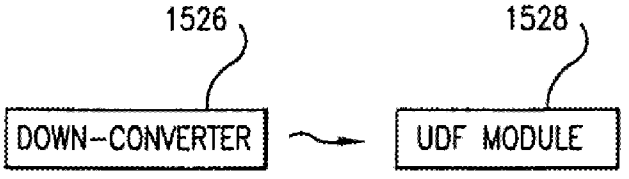


FIG. 15E

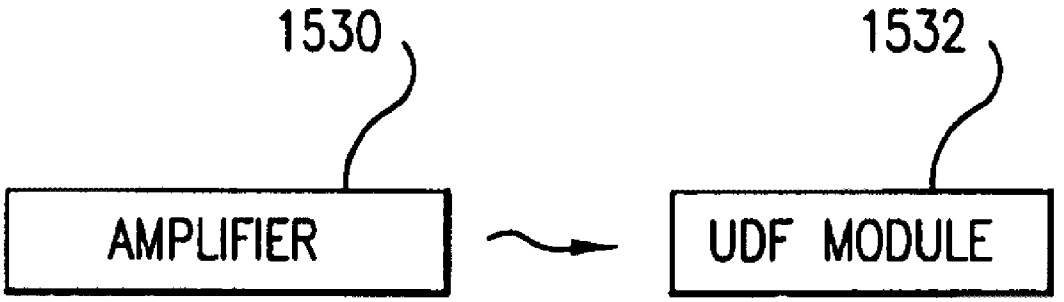


FIG. 15F

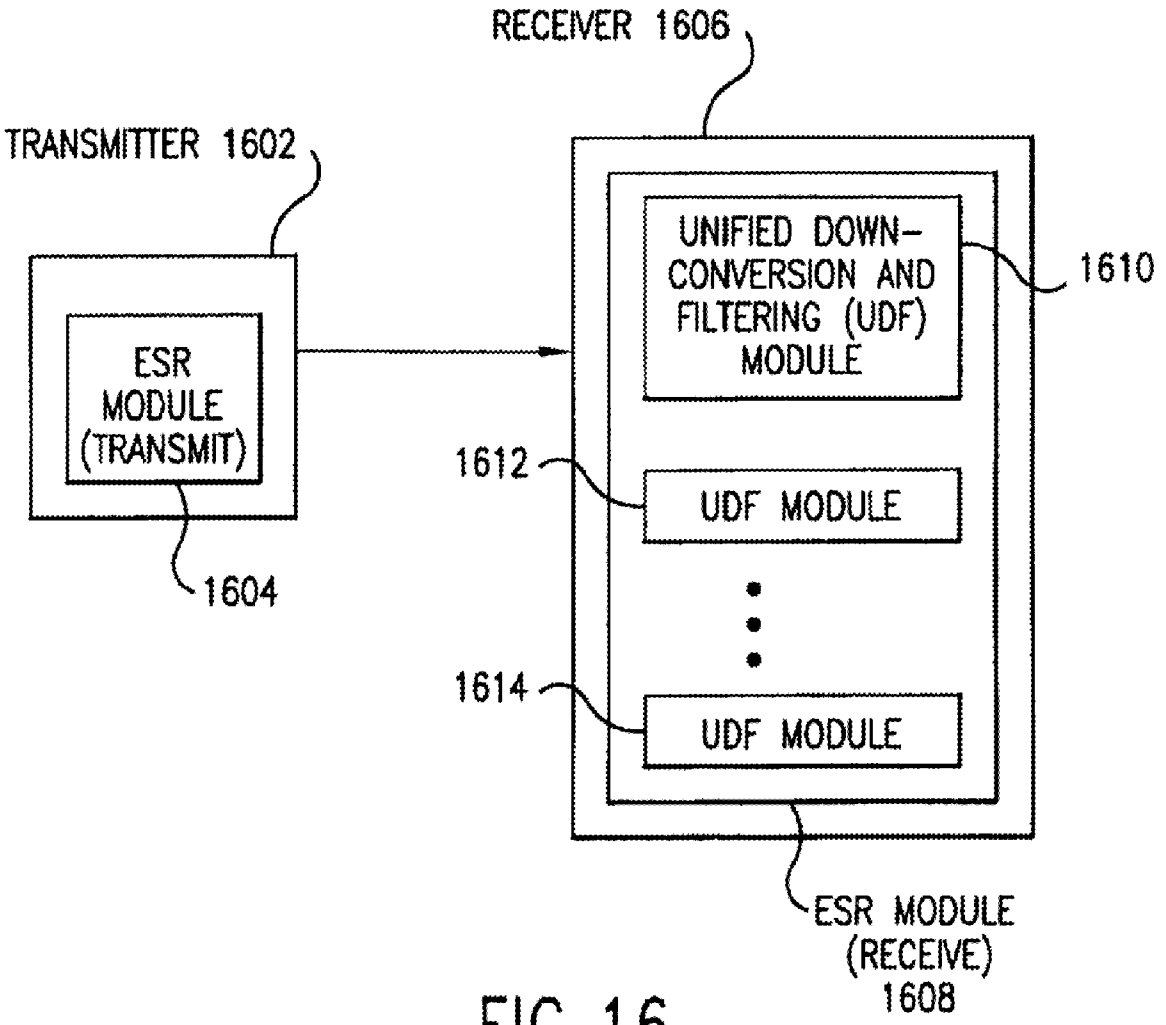

RECEIVER 1606
TRANSMITTER 1602
UNIFIED DOWN-CONVERSION AND FILTERING (UDF) MODULE
1610
ESR MODULE (TRANSMIT)
1612
UDF MODULE
1614
UDF MODULE
1604
ESR MODULE (RECEIVE) 1608

FIG. 16

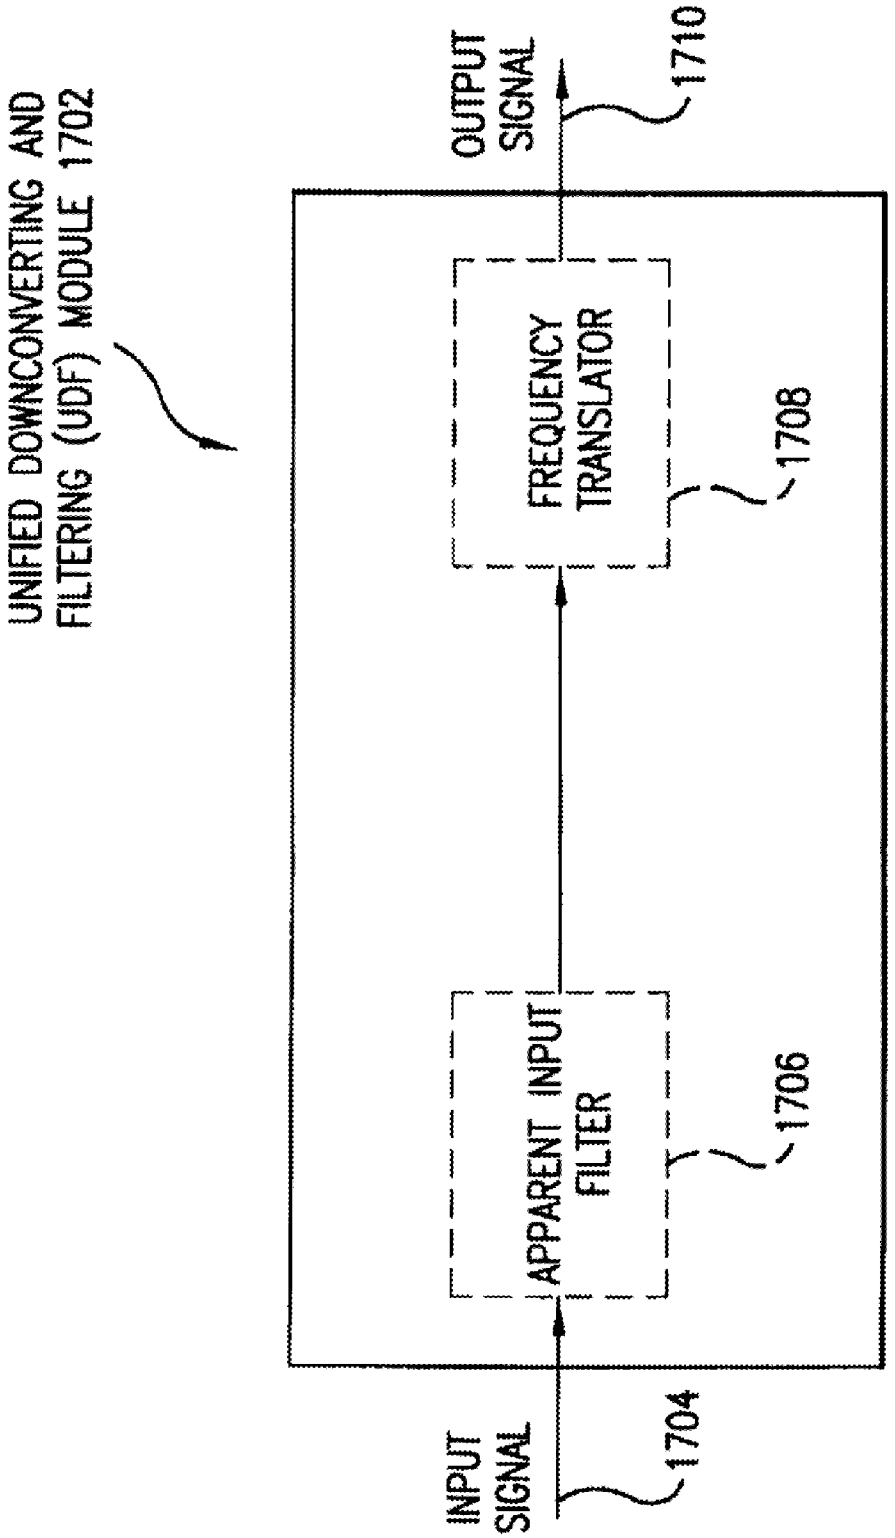

UNIFIED DOWNCONVERTING AND FILTERING (UDF) MODULE 1702
OUTPUT SIGNAL
1710
FREQUENCY TRANSLATOR
1708
APPARENT INPUT FILTER
1706
INPUT SIGNAL
1704

FIG. 17

1802

TIME NODE	t-1 (RISING EDGE OF Φ_1) 1804	t-1 (RISING EDGE OF Φ_2) 1808	t (RISING EDGE OF Φ_1) 1816	t (RISING EDGE OF Φ_2) 1826	t+1 (RISING EDGE OF Φ_1) 1838
1902	VI_{t-1} 1804	VI_{t-1} 1808	VI_t 1816	VI_t 1826	VI_{t+1} 1838
1904	—	VI_{t-1} 1810	VI_{t-1} 1818	VI_t 1828	VI_t 1840
1906	VO_{t-1} 1806	VO_{t-1} 1812	VO_t 1820	VO_t 1830	VO_{t+1} 1842
1908	—	VO_{t-1} 1814	VO_{t-1} 1822	VO_t 1832	VO_t 1844
1910	— 1807	—	VO_{t-1} 1824	VO_{t-1} 1834	VO_t 1846
1912	—	— 1815	—	VO_{t-1} 1836	VO_{t-1} 1848
1918	—	—	—	—	VI_t — 1850 $0.1*VO_t$ — $0.8*VO_{t-1}$

FIG. 18

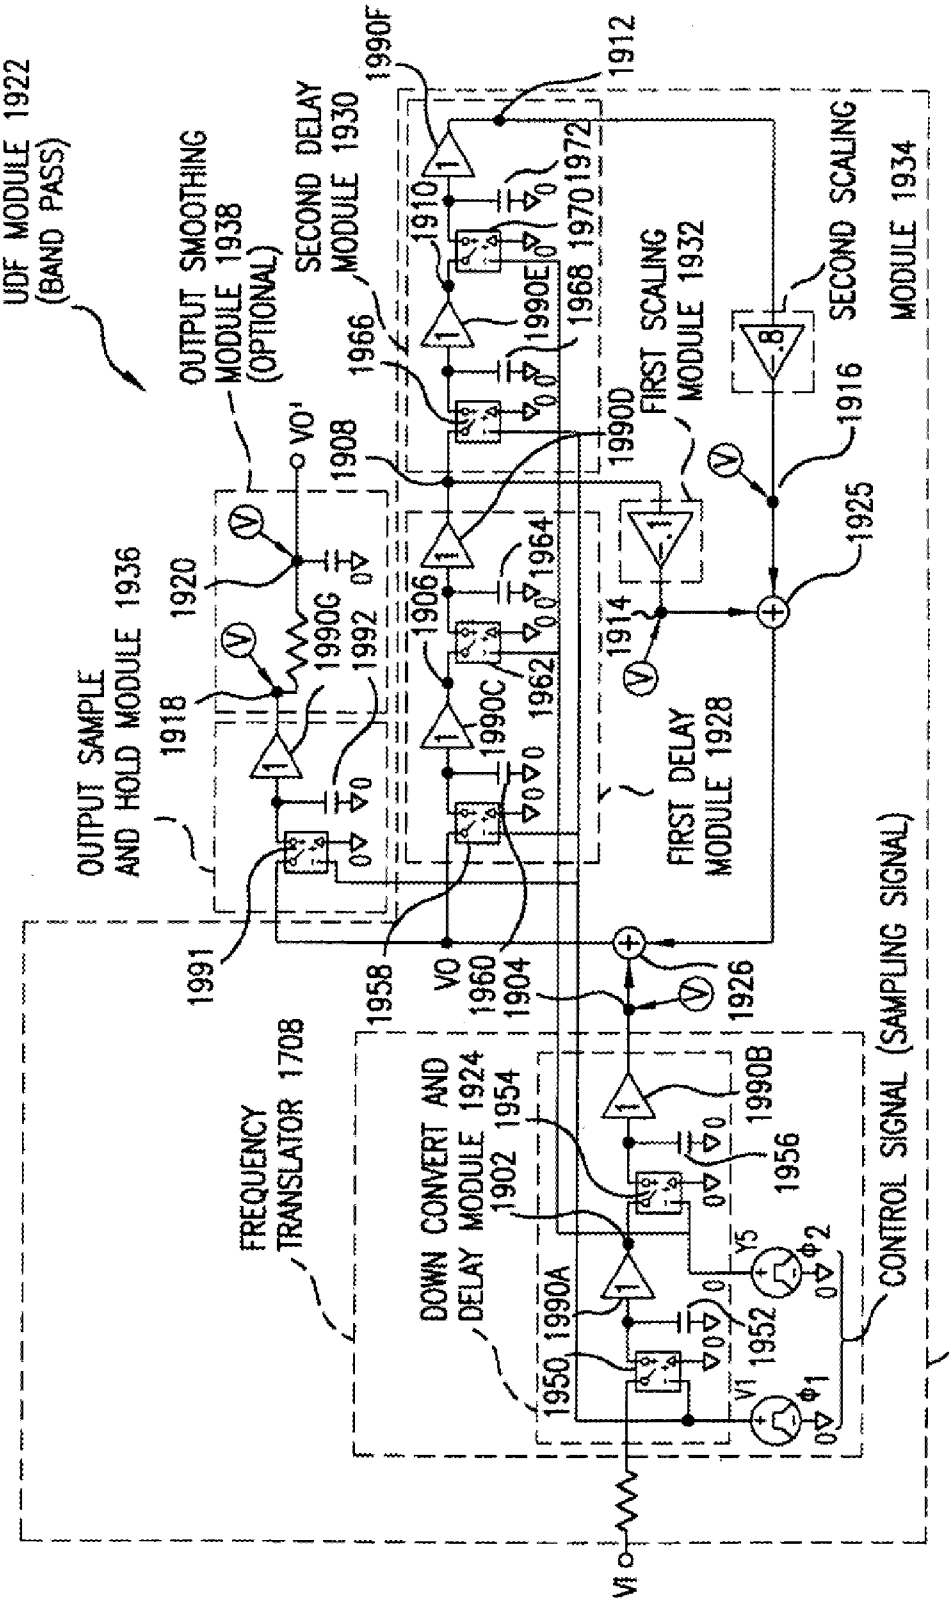

UDF MODULE 1922 (BAND PASS)
OUTPUT SAMPLE AND HOLD MODULE 1936
OUTPUT SMOOTHING MODULE 1938 (OPTIONAL)
SECOND DELAY MODULE 1930
FIRST SCALING MODULE 1932
SECOND SCALING MODULE 1934
FIRST DELAY MODULE 1928
FREQUENCY TRANSLATOR 1708
DOWN CONVERT AND DELAY MODULE 1924
CONTROL SIGNAL (SAMPLING SIGNAL)
INPUT FILTER 1706
VI
VO
VO'
1902
1904
1906
1908
1910
1912
1914
1916
1918
1920
1925
1926
1928
1930
1932
1934
1936
1938
1950
1952
1954
1956
1958
1960
1962
1964
1966
1968
1970
1972
1990A
1990B
1990C
1990D
1990E
1990F
1991
1992
Y1
Y5
Φ1
Φ2

FIG. 19

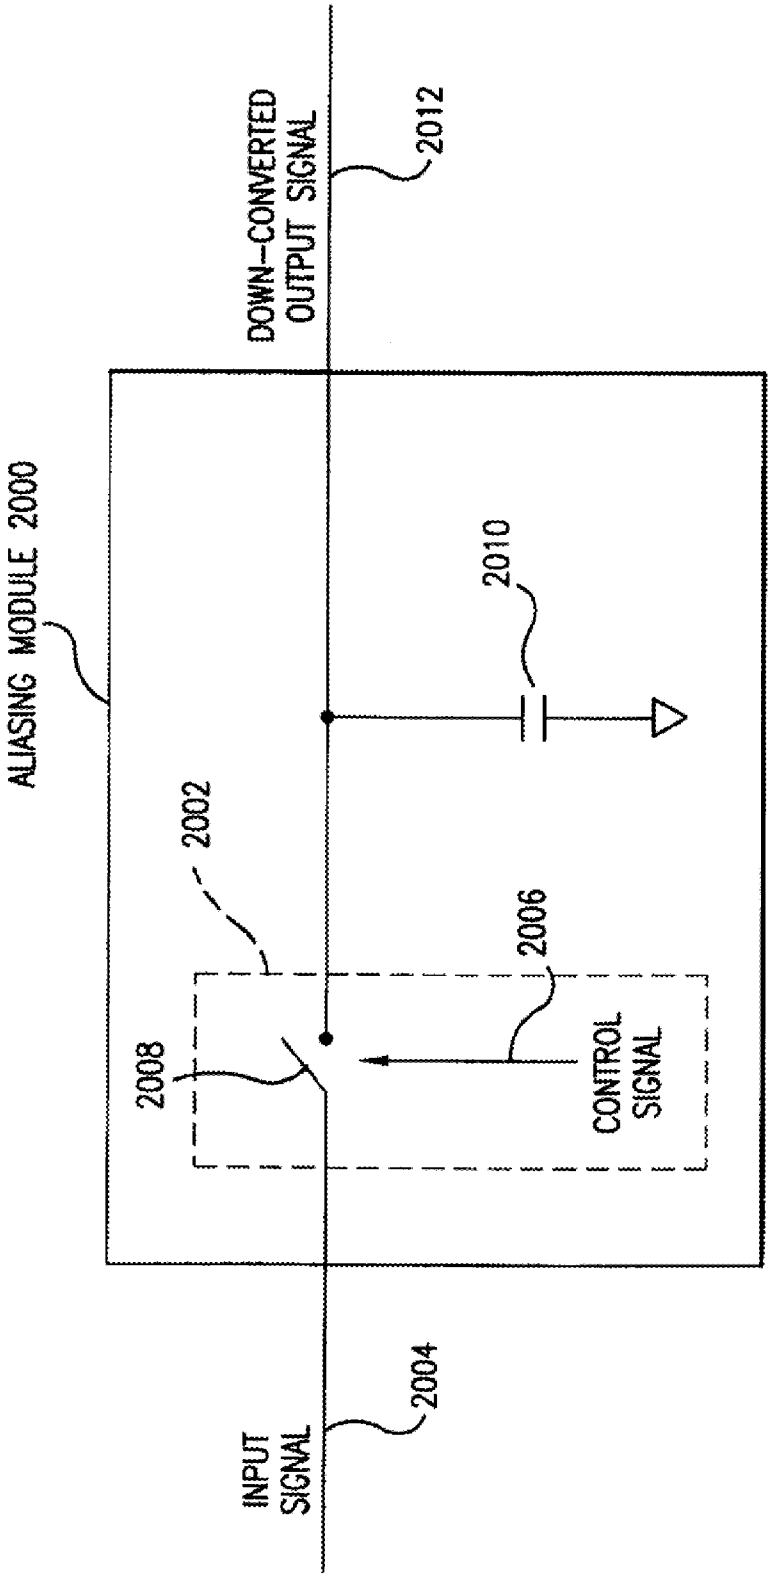

ALIASING MODULE 2000
DOWN-CONVERTED OUTPUT SIGNAL
2012
2010
2002
2006
2008
CONTROL SIGNAL
INPUT SIGNAL
2004

FIG. 20A

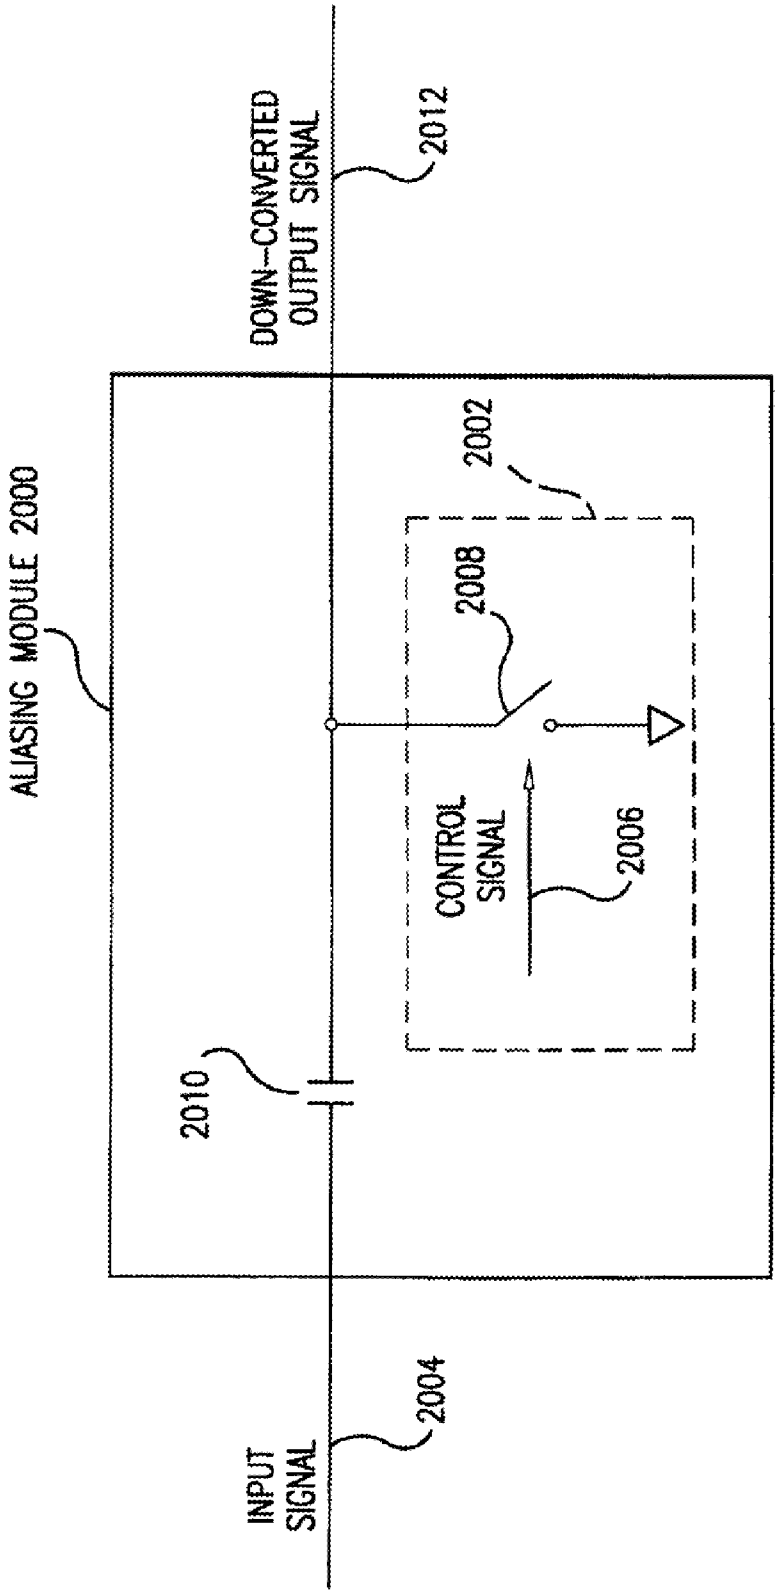

ALIASING MODULE 2000
DOWN-CONVERTED OUTPUT SIGNAL
2012
2002
2008
CONTROL SIGNAL
2006
2010
INPUT SIGNAL
2004

FIG. 20A-1

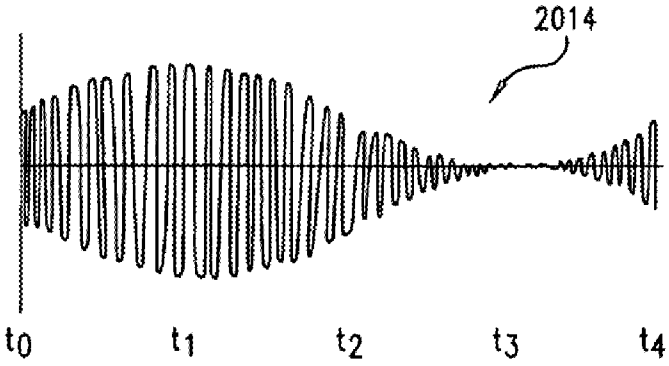


FIG. 20B

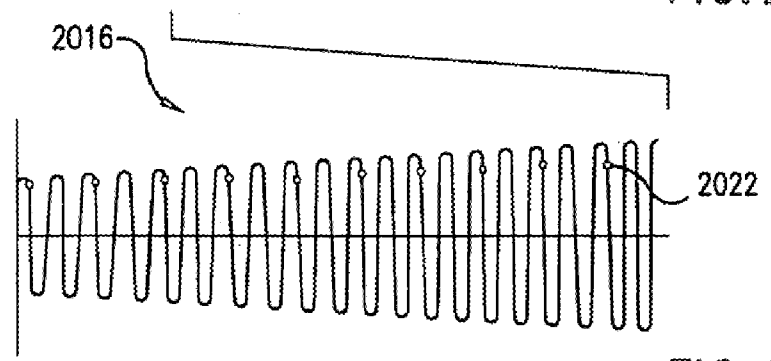


FIG. 20C

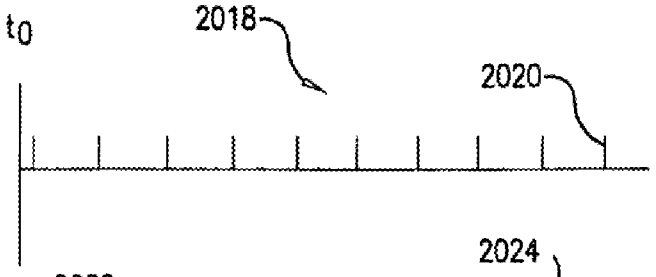


FIG. 20D

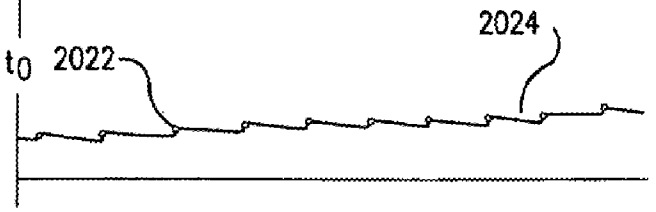


FIG. 20E

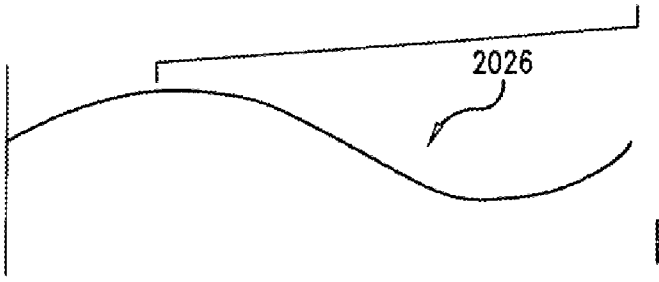


FIG. 20F

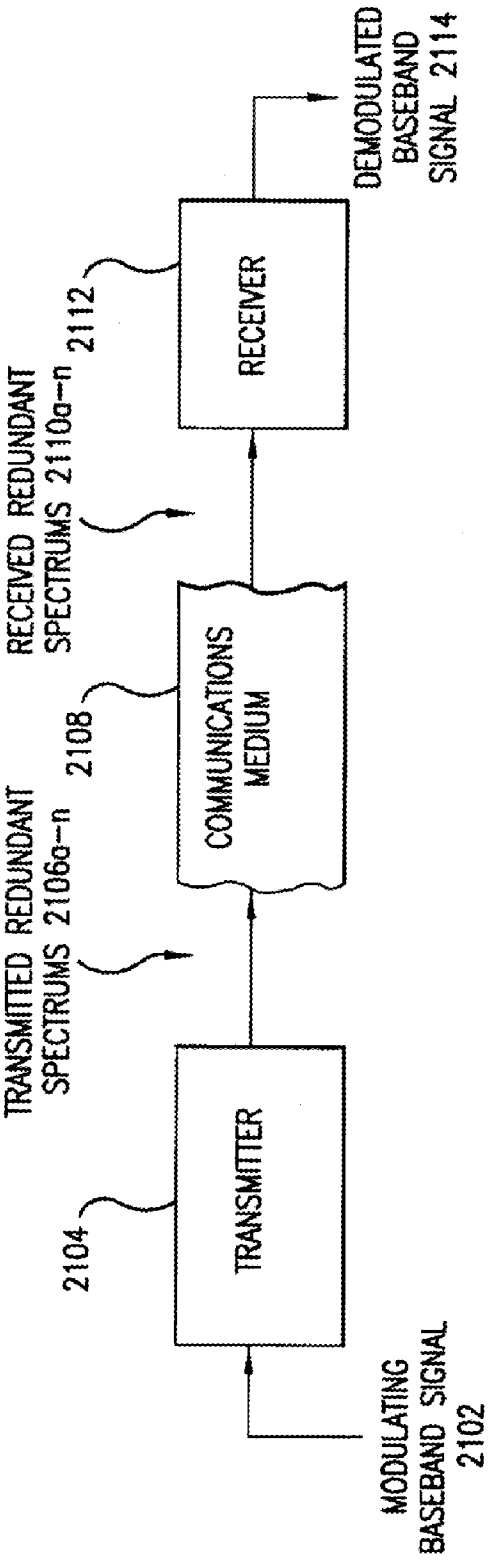

MODULATING BASEBAND SIGNAL 2102
2104
TRANSMITTER
TRANSMITTED REDUNDANT SPECTRUMS 2106a–n
2108
COMMUNICATIONS MEDIUM
RECEIVED REDUNDANT SPECTRUMS 2110a–n
2112
RECEIVER
DEMODULATED BASEBAND SIGNAL 2114

FIG. 21

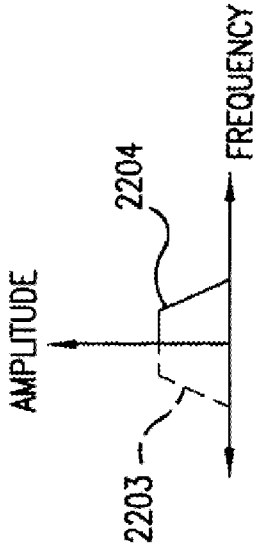


FIG. 22B

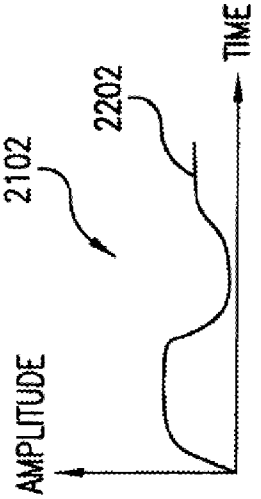


FIG. 22A

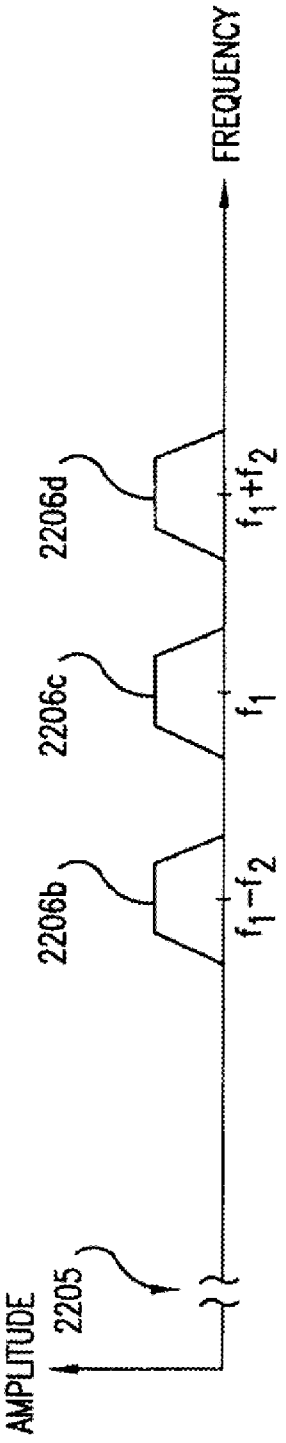


FIG. 22C

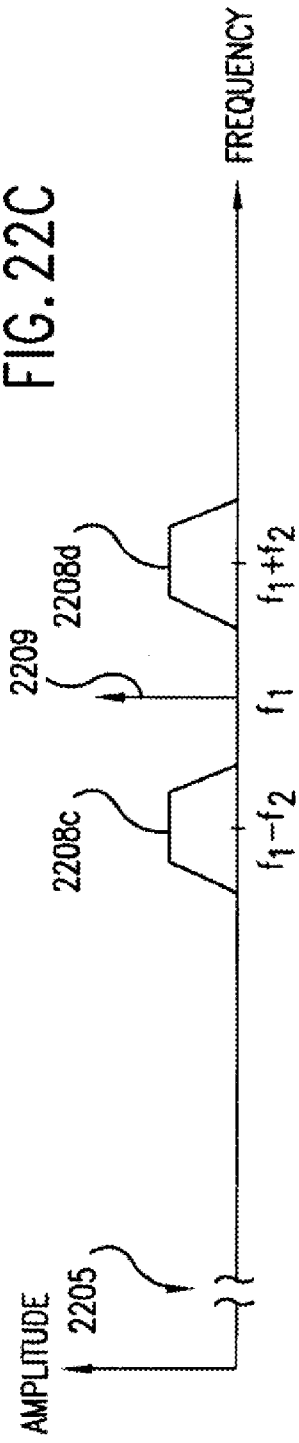


FIG. 22D

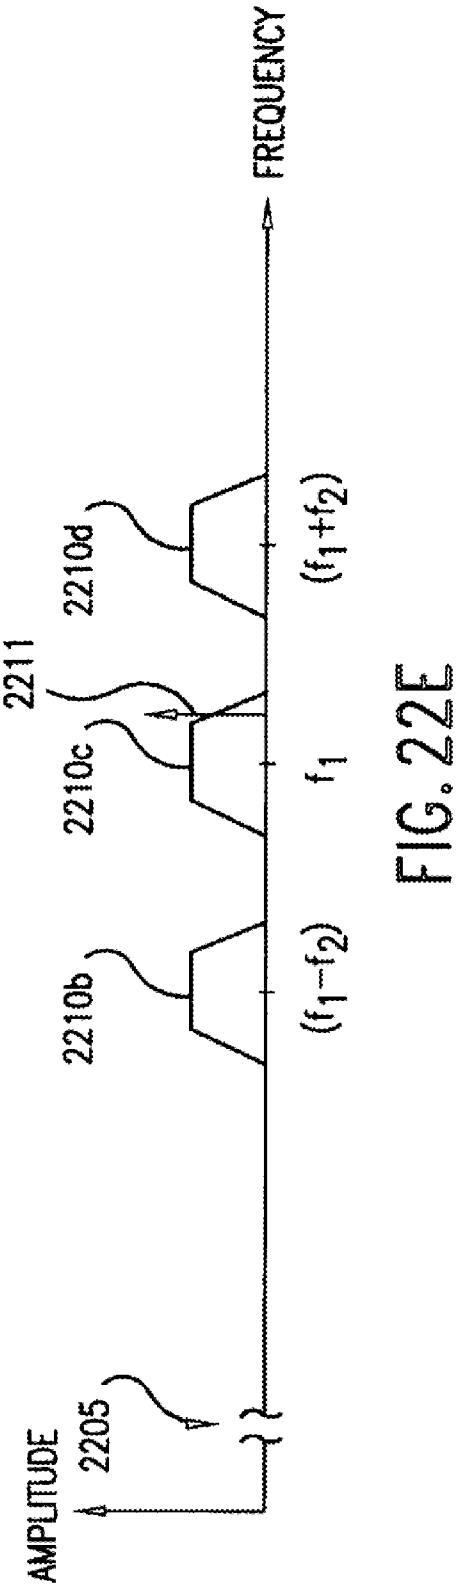


FIG. 22E

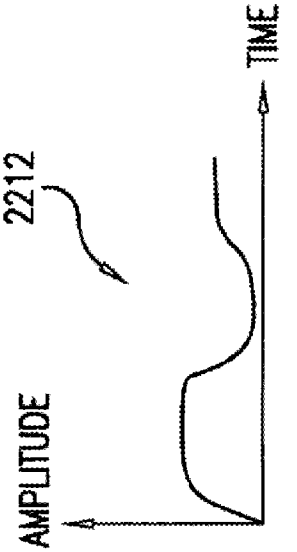


FIG. 22F

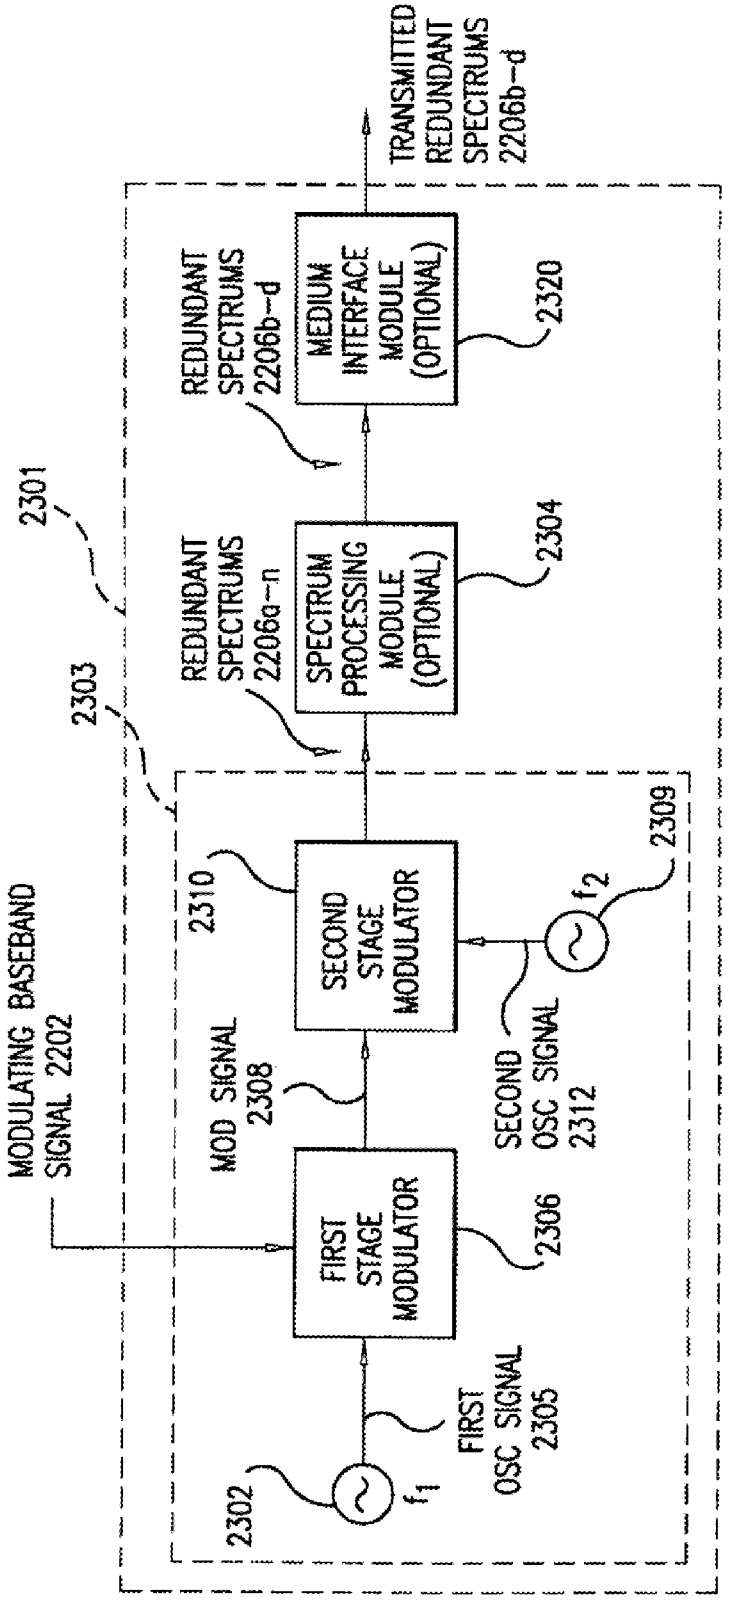

TRANSMITTED REDUNDANT SPECTRUMS 2206b–d
MEDIUM INTERFACE MODULE (OPTIONAL)
2320
REDUNDANT SPECTRUMS 2206b–d
SPECTRUM PROCESSING MODULE (OPTIONAL)
2304
REDUNDANT SPECTRUMS 2206a–n
2301
2303
SECOND STAGE MODULATOR
2310
2309
f_2
SECOND OSC SIGNAL 2312
MOD SIGNAL 2308
FIRST STAGE MODULATOR
2306
MODULATING BASEBAND SIGNAL 2202
FIRST OSC SIGNAL 2305
f_1
2302

FIG. 23A

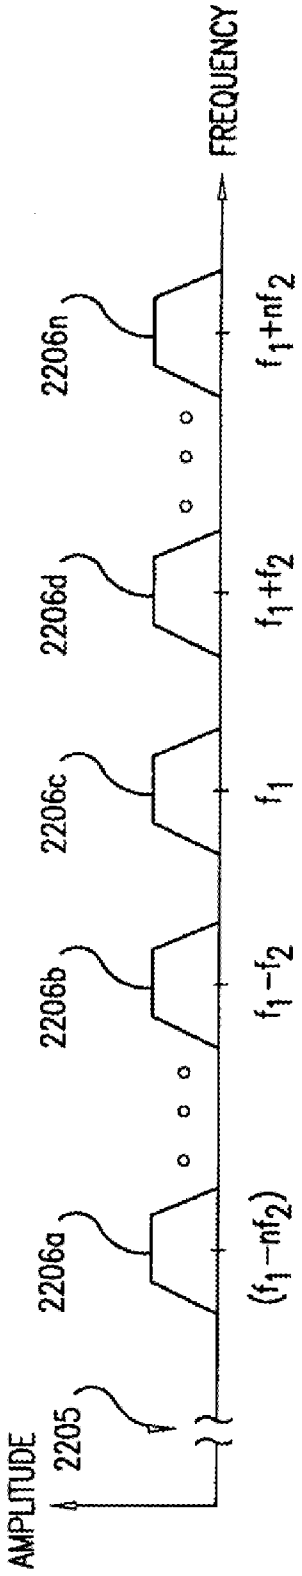


FIG. 23B

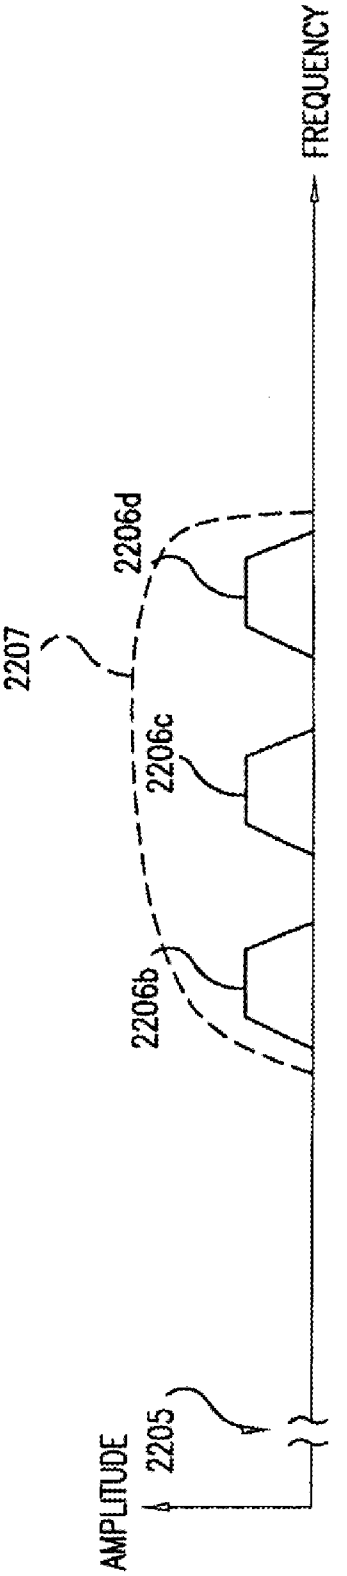


FIG. 23C

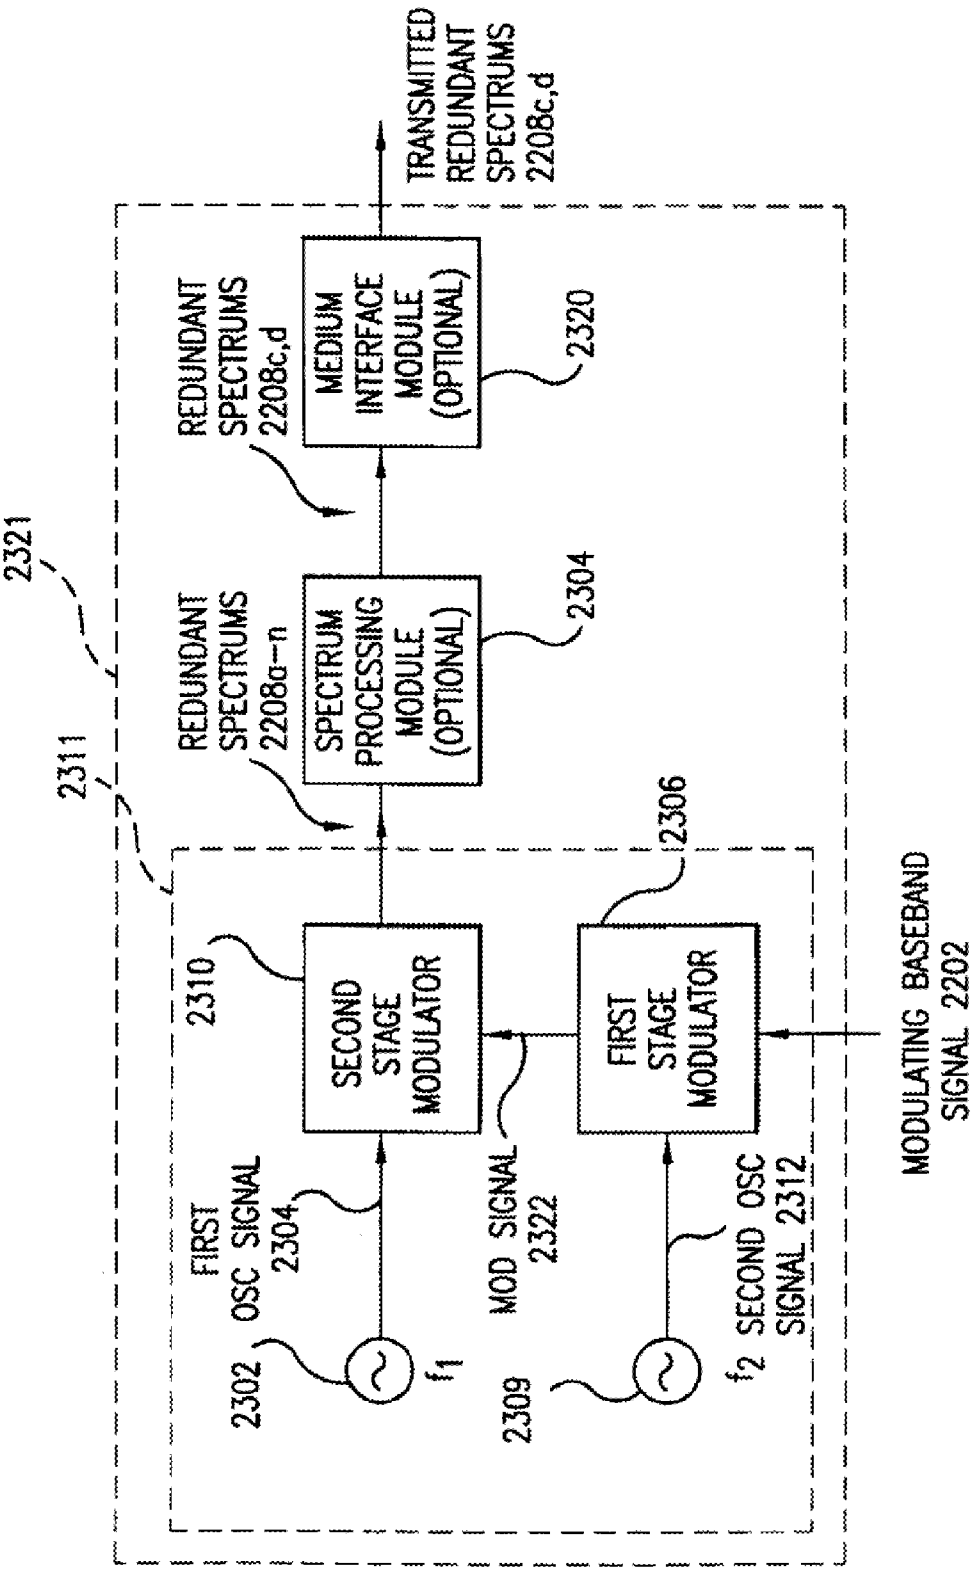

2321
2311
TRANSMITTED REDUNDANT SPECTRUMS 2208c,d
REDUNDANT SPECTRUMS 2208c,d
MEDIUM INTERFACE MODULE (OPTIONAL)
2320
REDUNDANT SPECTRUMS 2208a-n
SPECTRUM PROCESSING MODULE (OPTIONAL)
2304
2306
2310
SECOND STAGE MODULATOR
FIRST STAGE MODULATOR
MODULATING BASEBAND SIGNAL 2202
FIRST OSC SIGNAL 2304
2302
f1
MOD SIGNAL 2322
2309
f2
SECOND OSC SIGNAL 2312

FIG. 23D

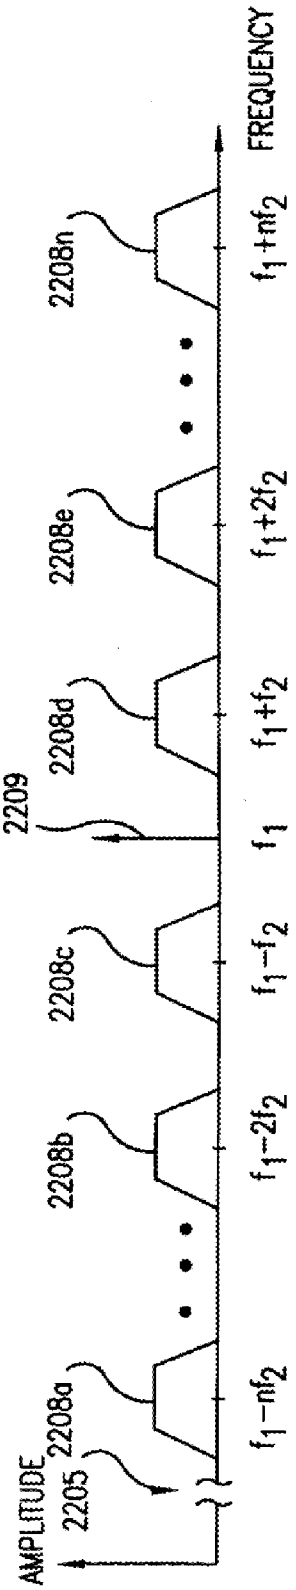


FIG. 23E

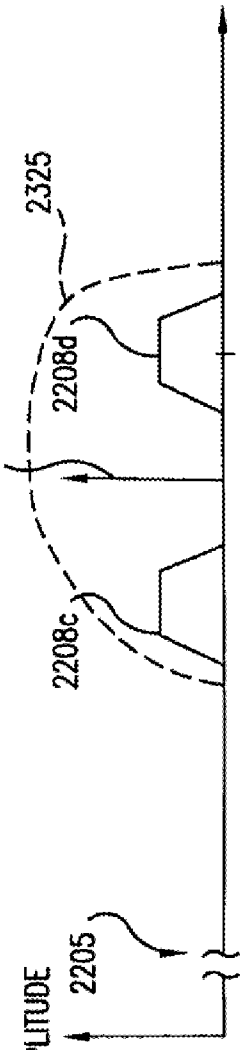


FIG. 23F

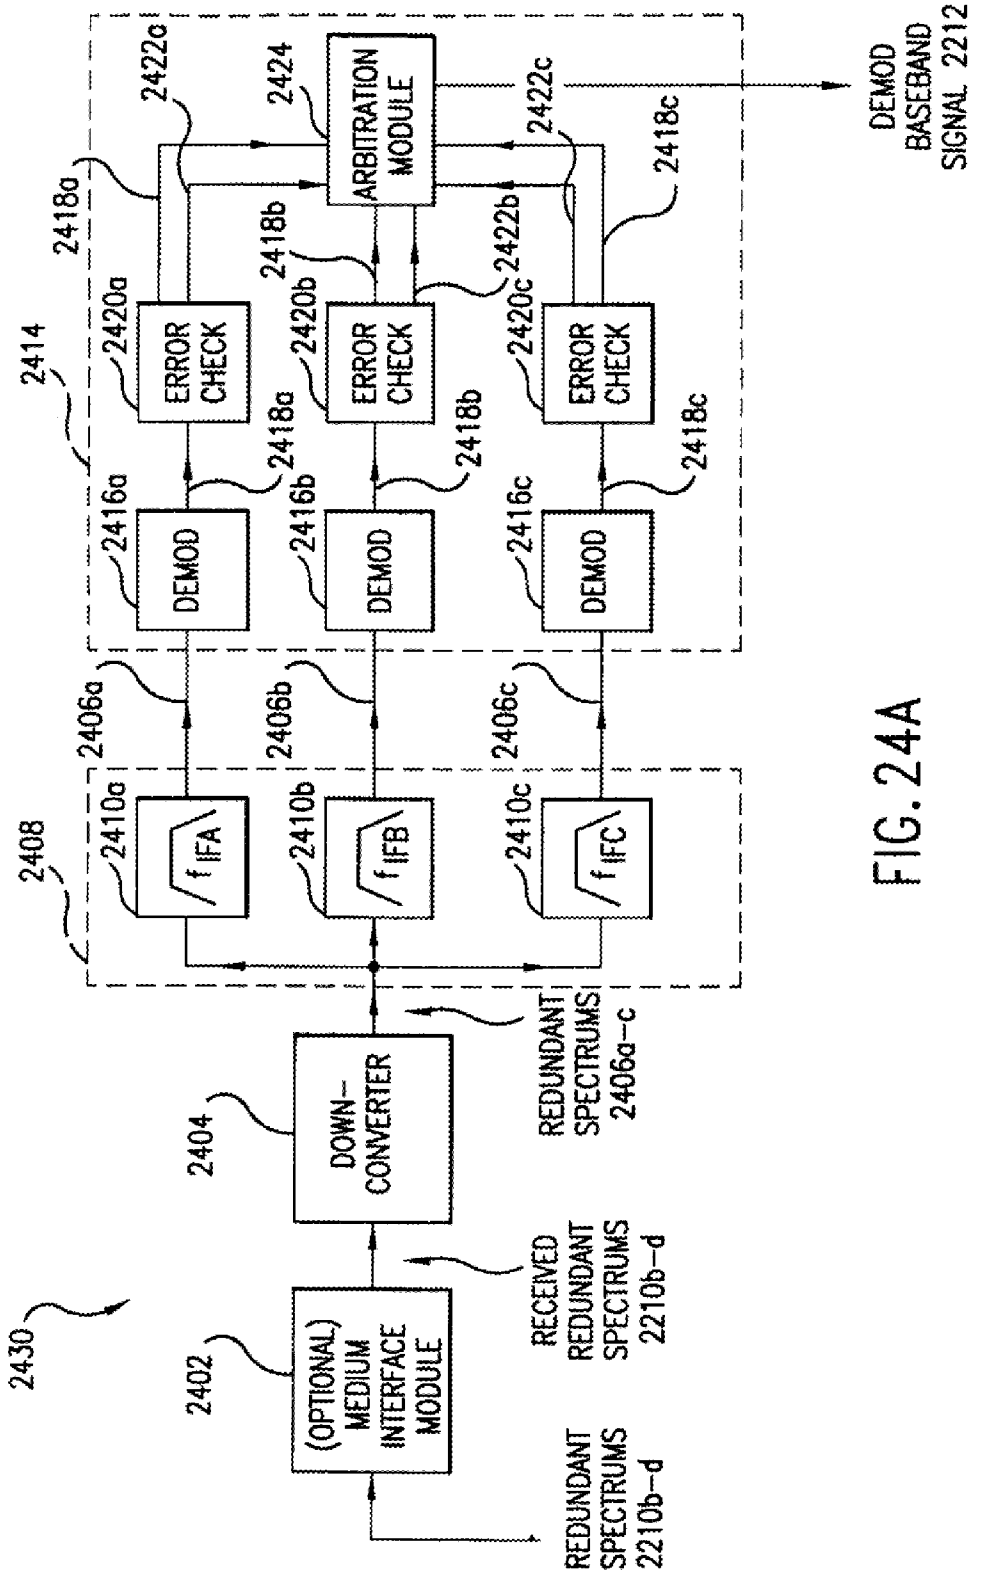

2430
2402
(OPTIONAL) MEDIUM INTERFACE MODULE
RECEIVED REDUNDANT SPECTRUMS 2210b–d
REDUNDANT SPECTRUMS 2210b–d
2404
DOWN-CONVERTER
REDUNDANT SPECTRUMS 2406a–c
2408
2410a
f_{IFA}
2410b
f_{IFB}
2410c
f_{IFC}
2406a
2406b
2406c
2414
2416a
DEMOD
2416b
DEMOD
2416c
DEMOD
2418a
2418b
2418c
2420a
ERROR CHECK
2420b
ERROR CHECK
2420c
ERROR CHECK
2422a
2422b
2422c
2424
ARBITRATION MODULE
DEMOD BASEBAND SIGNAL 2212

FIG. 24A

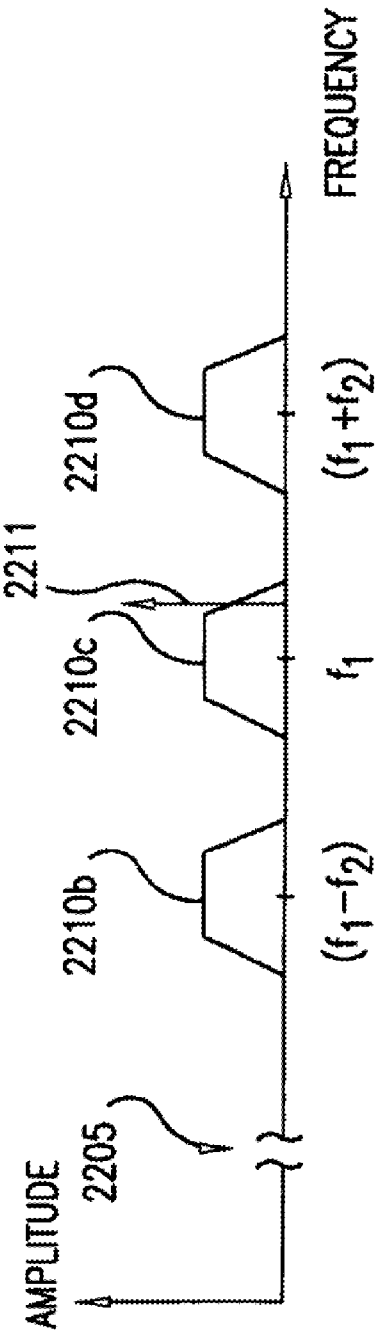


FIG. 24B

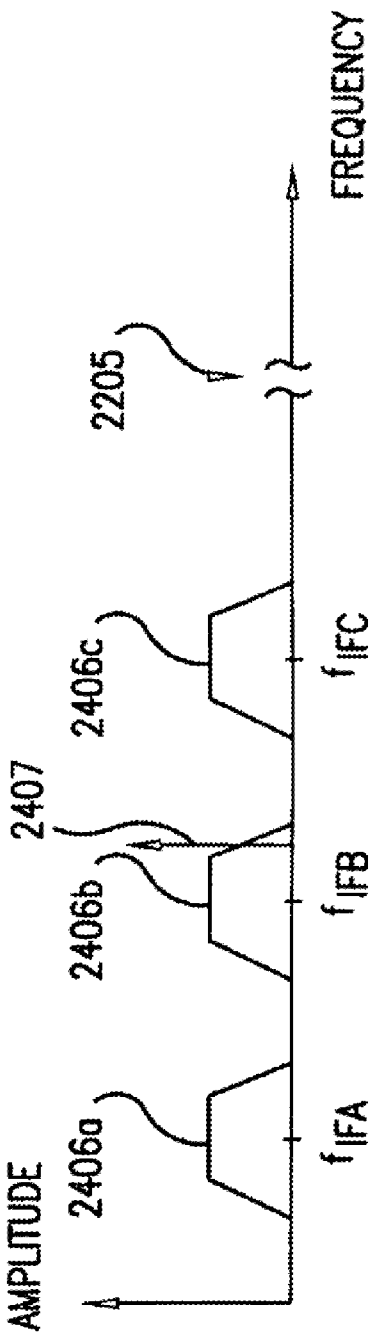


FIG. 24C

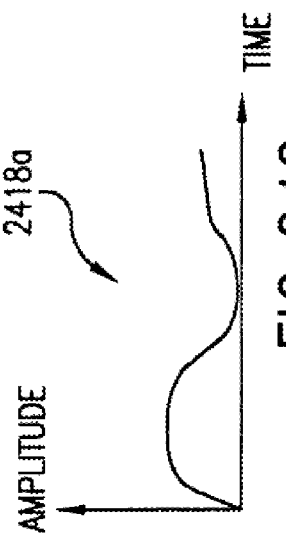


FIG. 24G

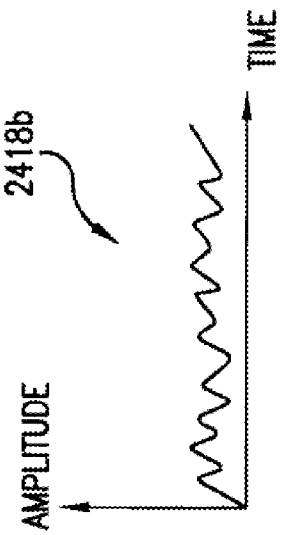


FIG. 24H

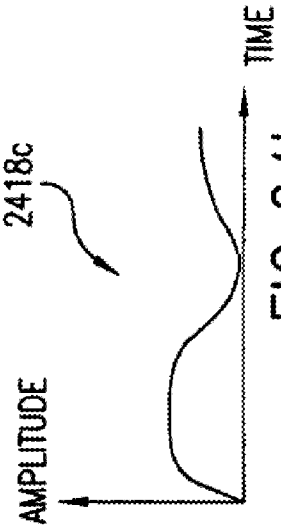


FIG. 24I

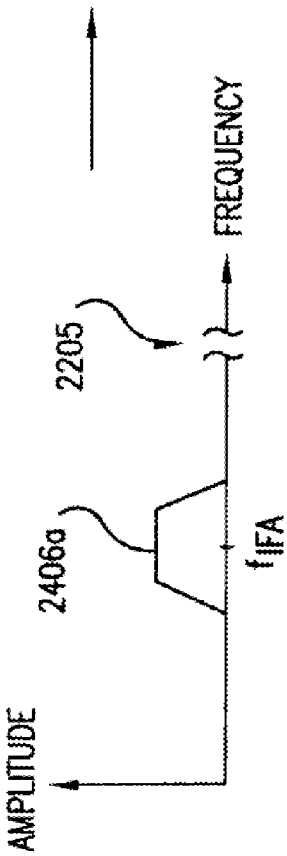


FIG. 24D

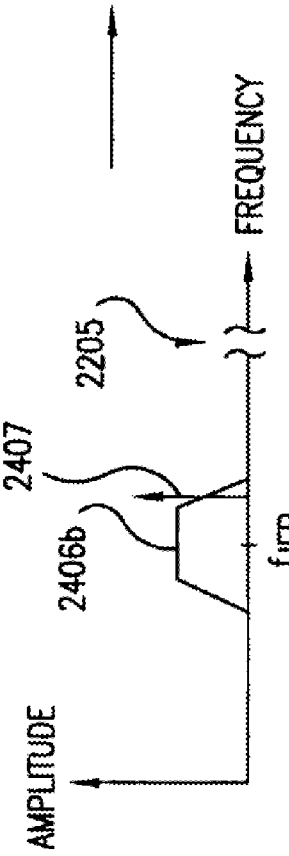


FIG. 24E

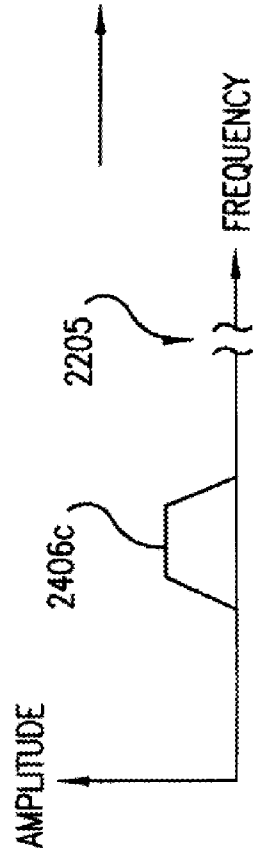


FIG. 24F

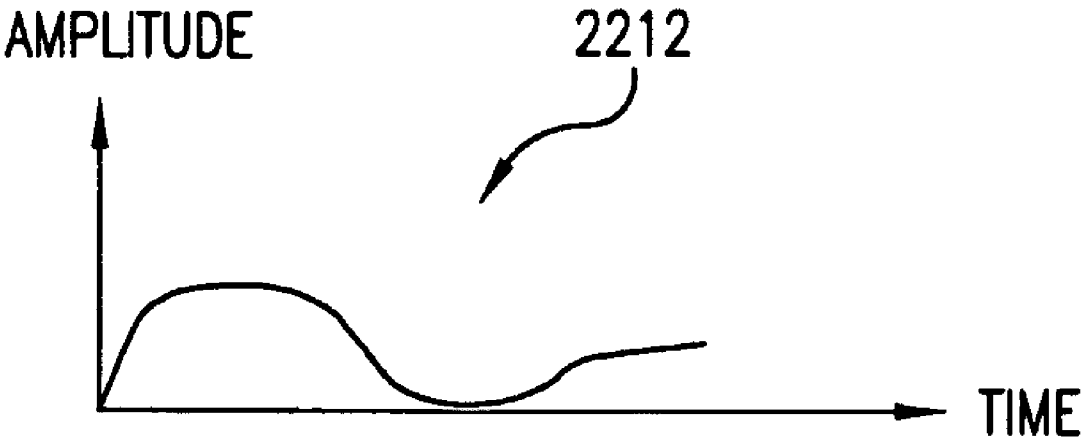


FIG. 24J

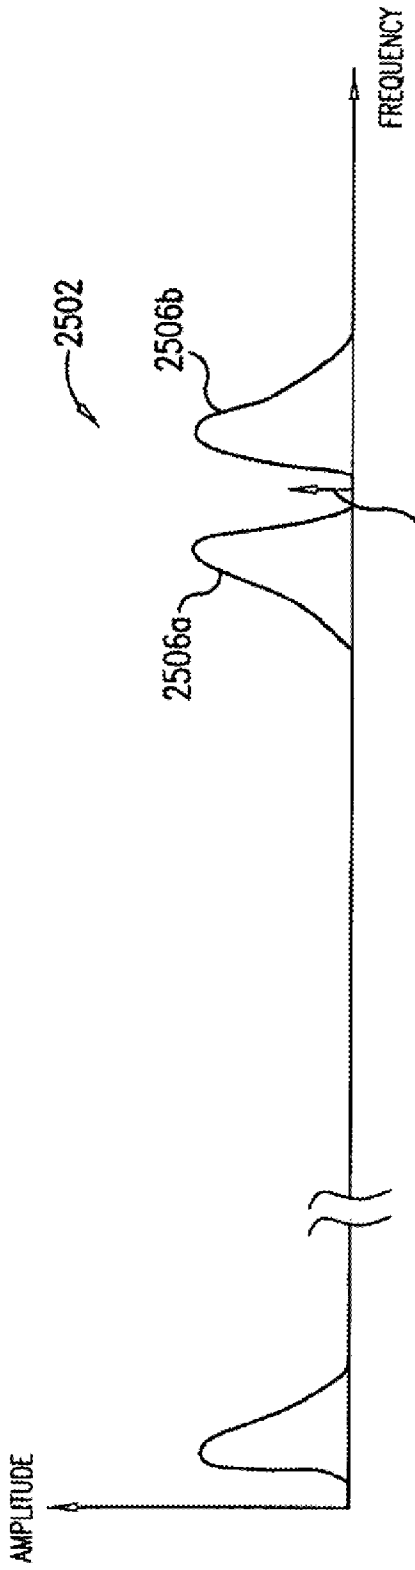


FIG. 25A

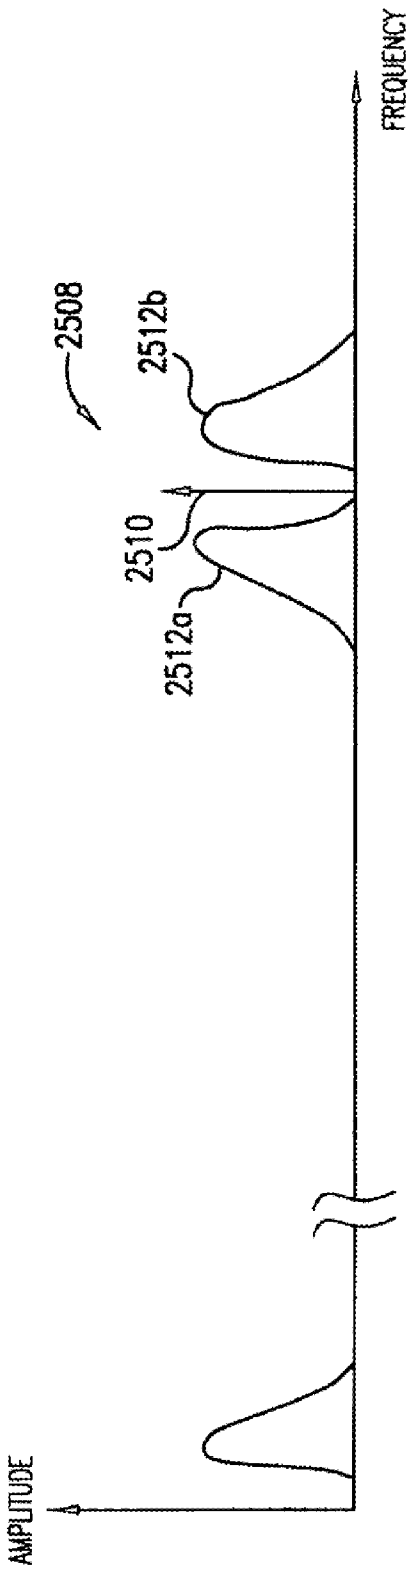


FIG. 25B

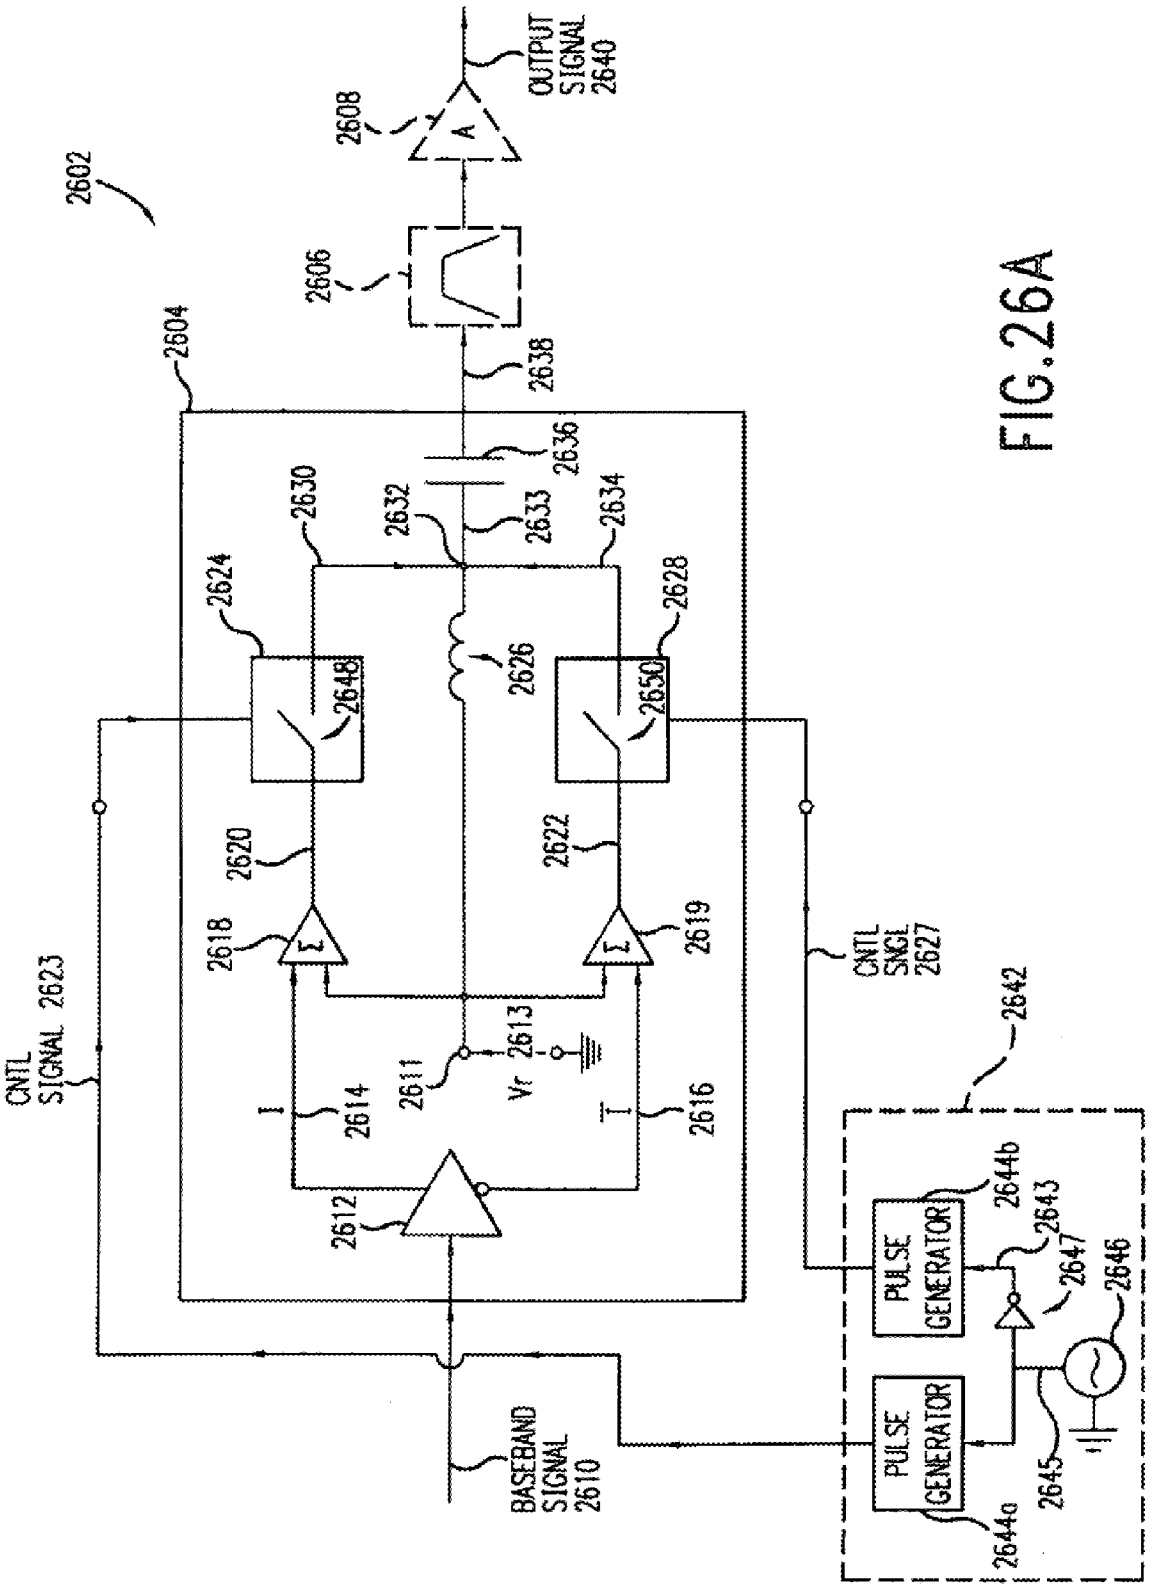

2602
2604
2606
2608
A
OUTPUT SIGNAL 2640
2638
2636
2630
2632
2633
2634
2624
2628
2626
2648
2650
2620
2622
2618
Σ
2619
CNTL SIGNAL 2623
CNTL SNGL 2627
2642
2611
2613
Vr
2614
2616
2612
PULSE GENERATOR
2644b
2643
2647
2646
2645
2644a
BASEBAND SIGNAL 2610

FIG. 26A

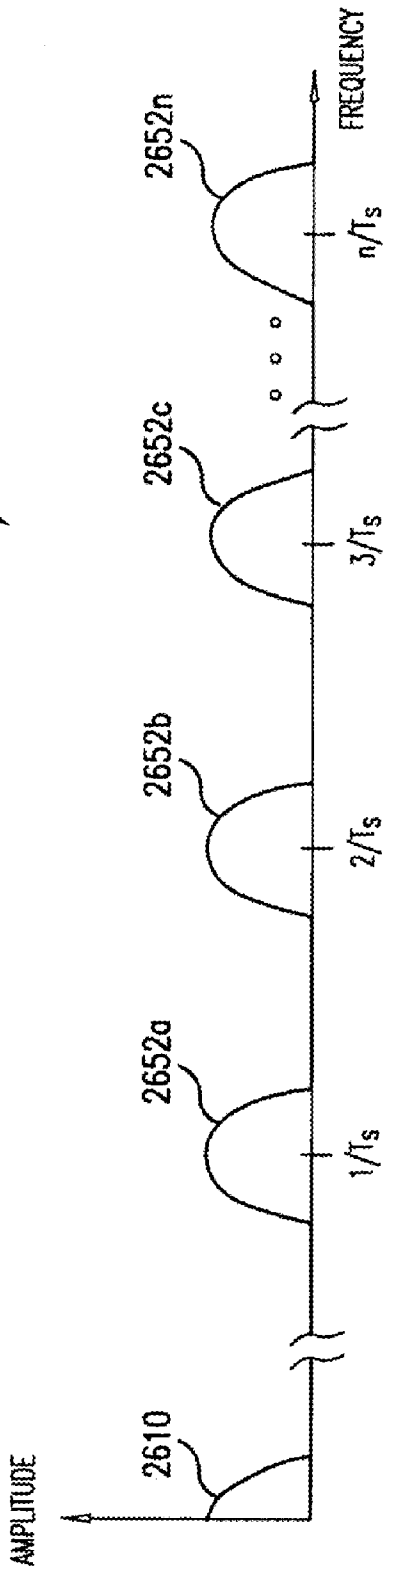

2630
2652n
2652c
2652b
2652a
2610
AMPLITUDE
FREQUENCY
n/Ts
3/Ts
2/Ts
1/Ts

FIG.26B

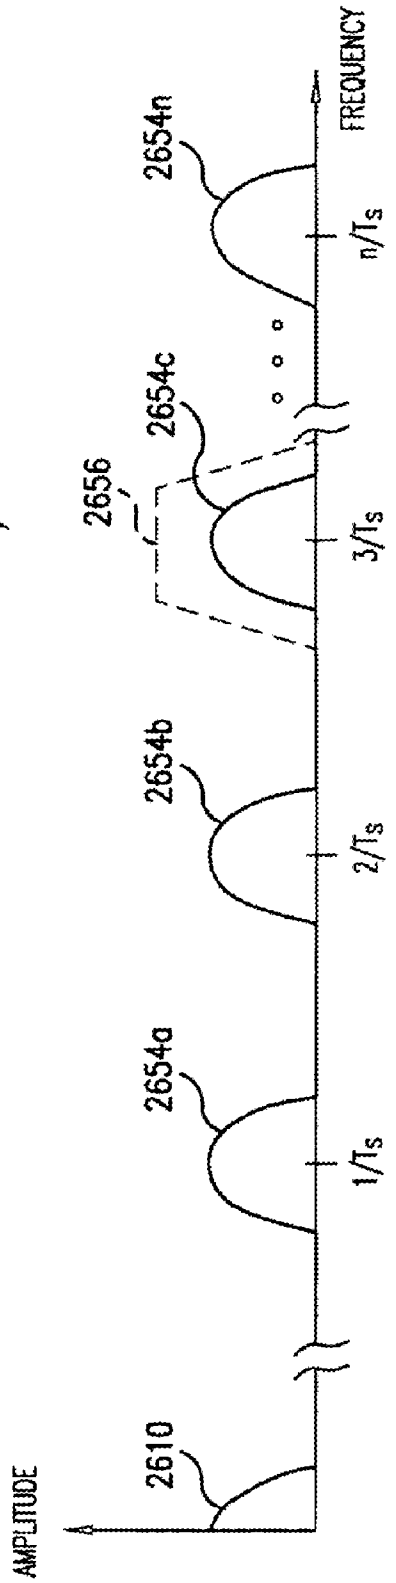

2633,2638
2654n
2654c
2656
2654b
2654a
2610
AMPLITUDE
FREQUENCY
n/Ts
3/Ts
2/Ts
1/Ts

FIG.26C

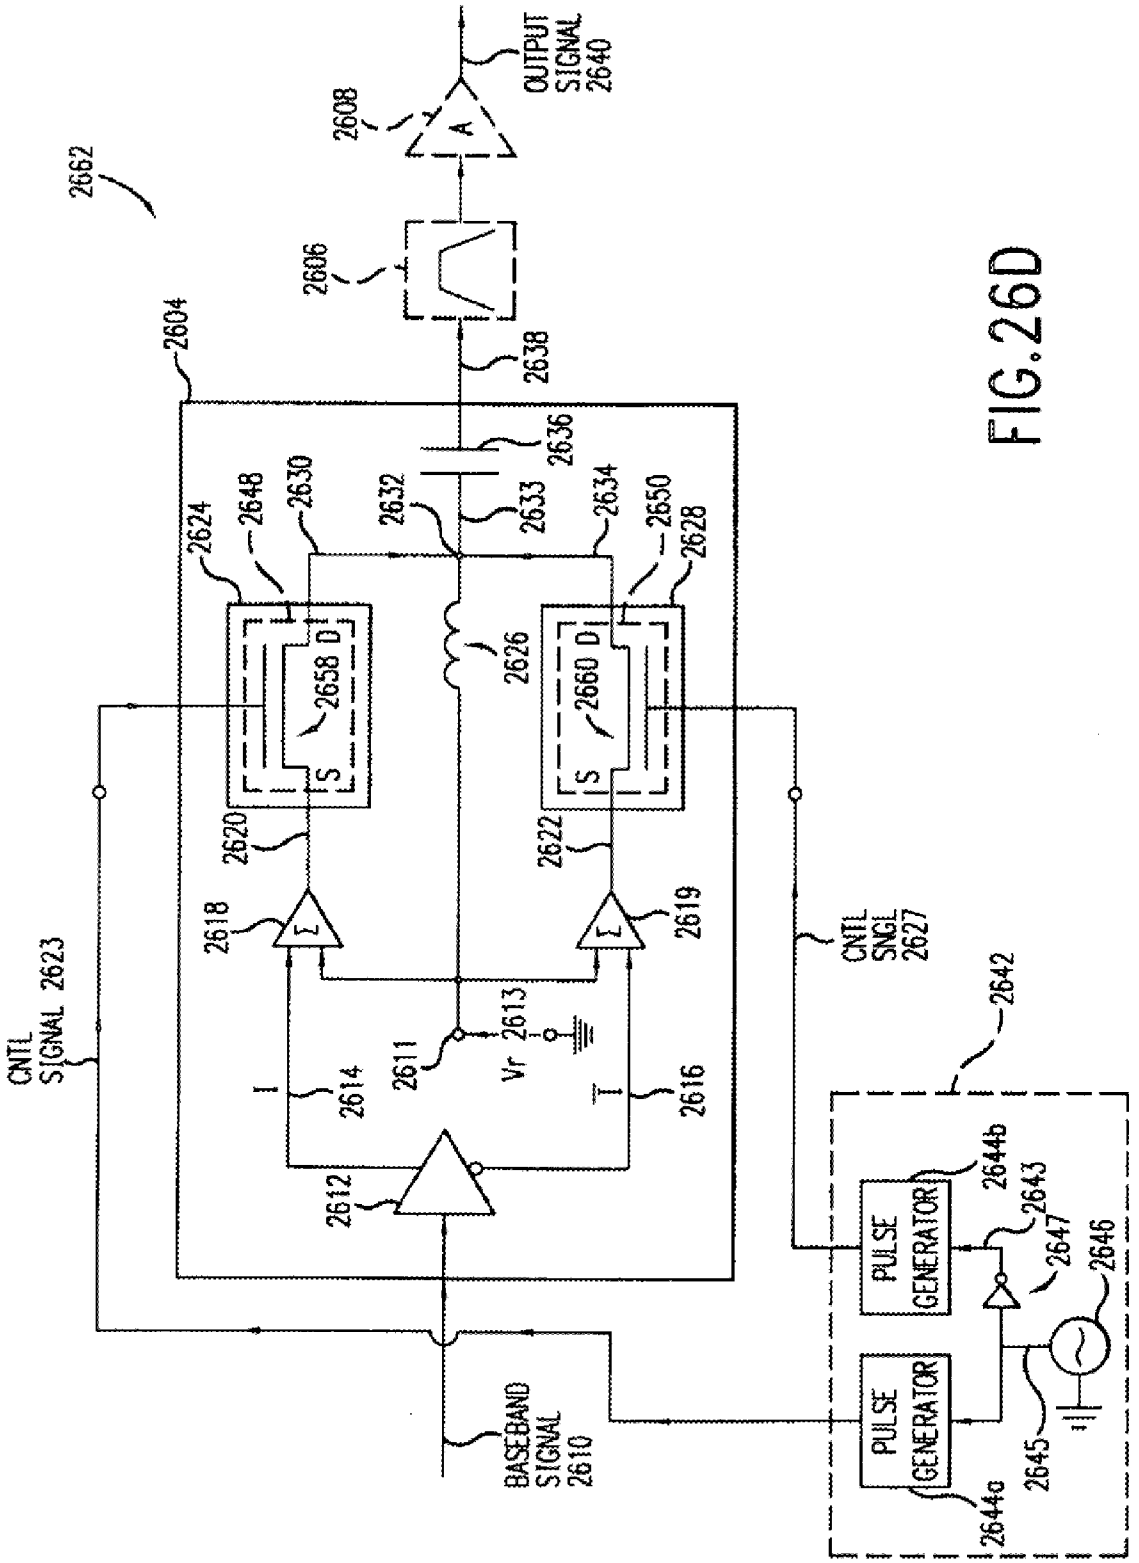

2662
2608
A
OUTPUT SIGNAL 2640
2606
2604
2638
2636
2624
2648
2630
2632
2633
2634
2650
2628
2626
2658 D
S
2660 D
S
2620
2622
2618
Σ
2619
Σ
CNTL SIGNAL 2623
CNTL SNGL 2627
2642
2611
2613
Vr
2614
2616
2612
PULSE GENERATOR
2644b
2643
2647
2646
2645
PULSE GENERATOR
2644a
BASEBAND SIGNAL 2610

FIG. 26D



FIG.27A

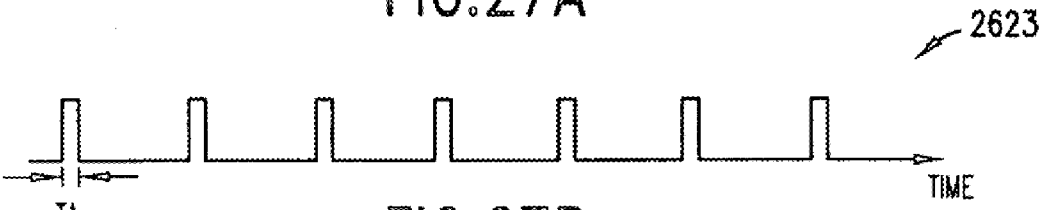


FIG.27B

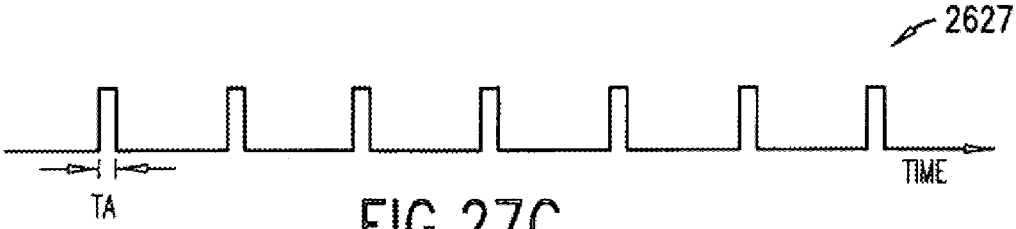


FIG.27C

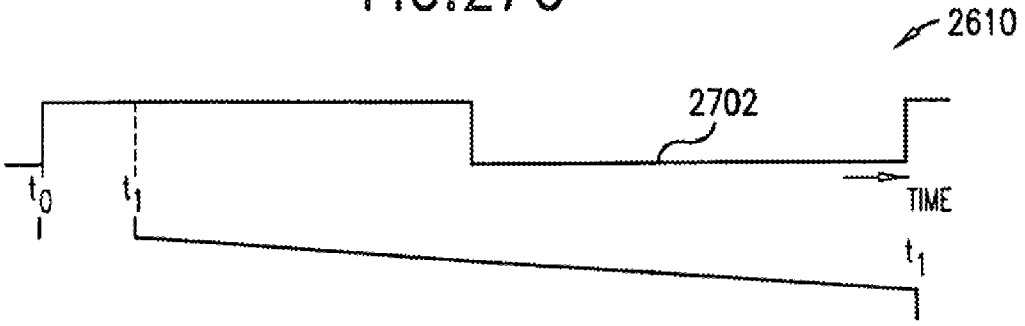


FIG.27D



FIG.27E

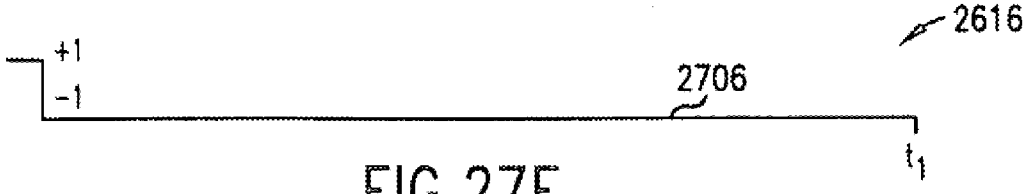


FIG.27F

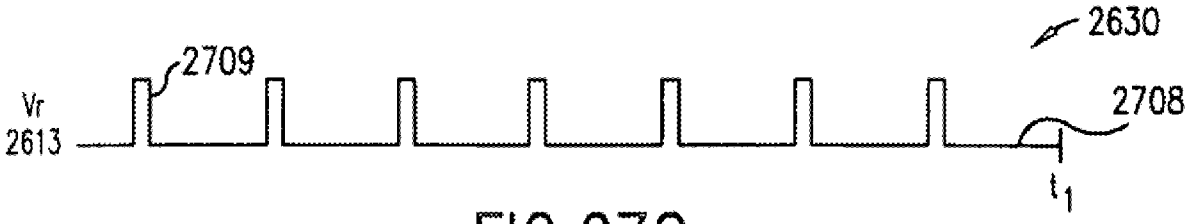


FIG.27G

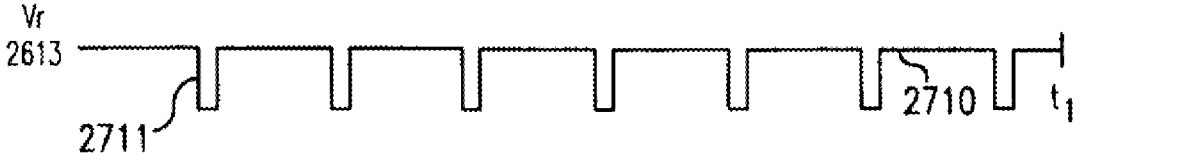


FIG.27H

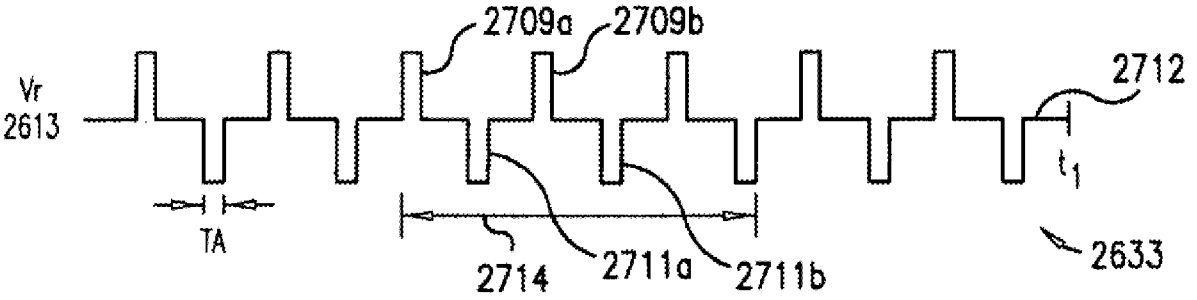


FIG.27I

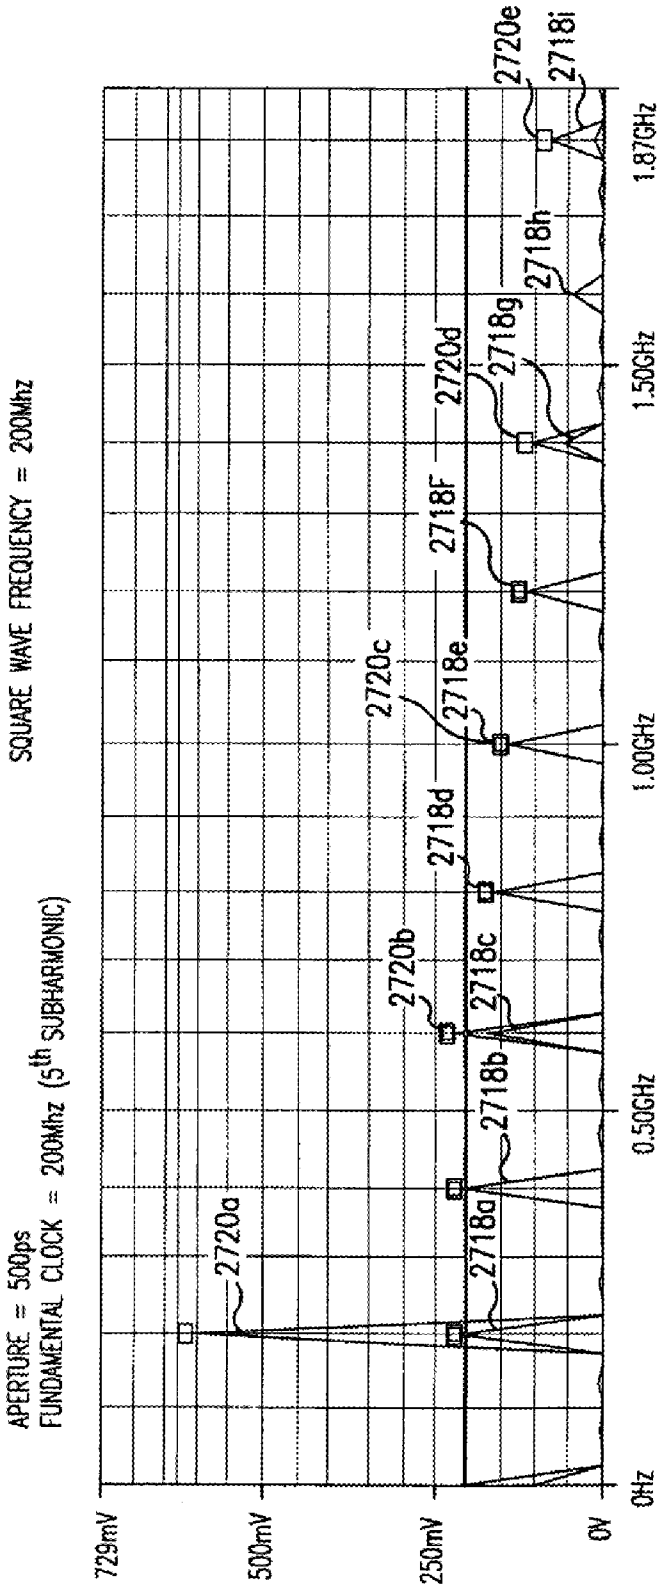

APERTURE = 500ps
FUNDAMENTAL CLOCK = 200Mhz (5th SUBHARMONIC)
SQUARE WAVE FREQUENCY = 200Mhz
729mV
500mV
250mV
0V
0Hz
0.50GHz
1.00GHz
1.50GHz
1.87GHz
FREQUENCY
V
V (SQUARE_WAVE)
2720a
2720b
2720c
2720d
2720e
2718a
2718b
2718c
2718d
2718e
2718F
2718g
2718h
2718i

FIG.27J

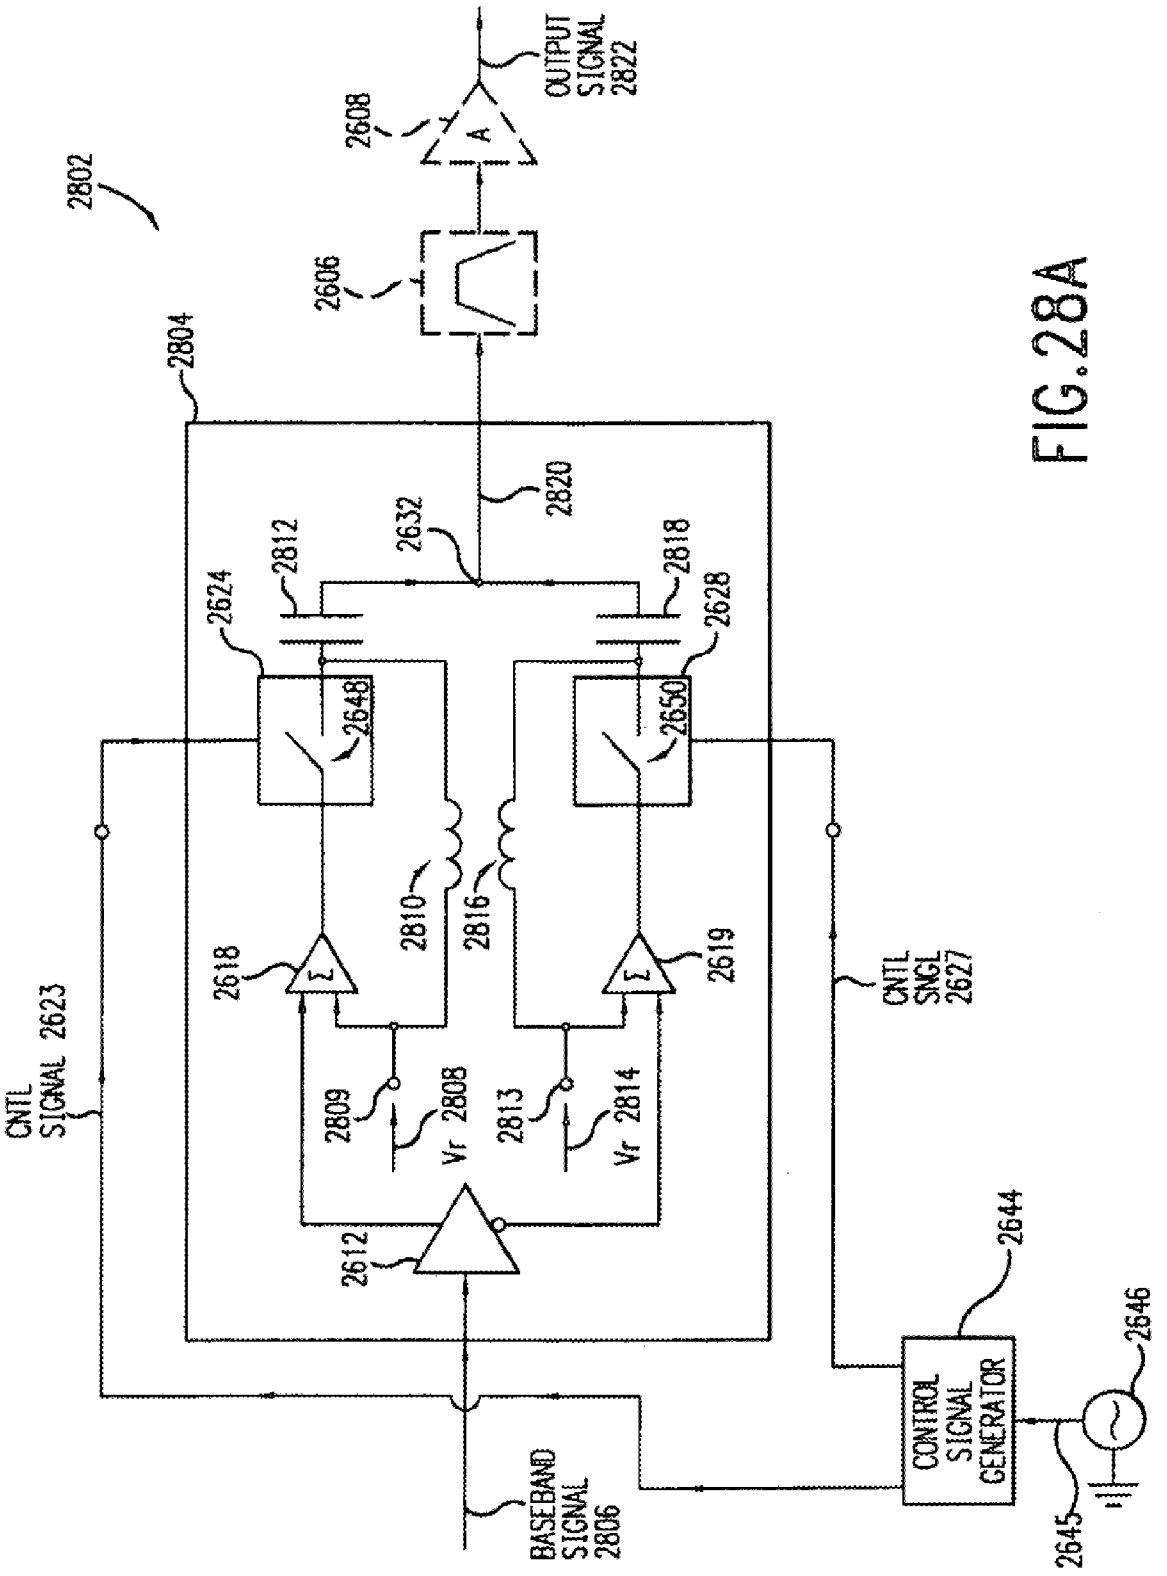

2802
2804
2608
2606
OUTPUT SIGNAL 2822
2820
2632
2812
2818
2624
2628
2648
2650
2618
2619
2810
2816
CNTL SIGNAL 2623
CNTL SNGL 2627
2809
Vr 2808
2813
Vr 2814
2612
2644
2646
2645
CONTROL SIGNAL GENERATOR
BASEBAND SIGNAL 2806

FIG.28A

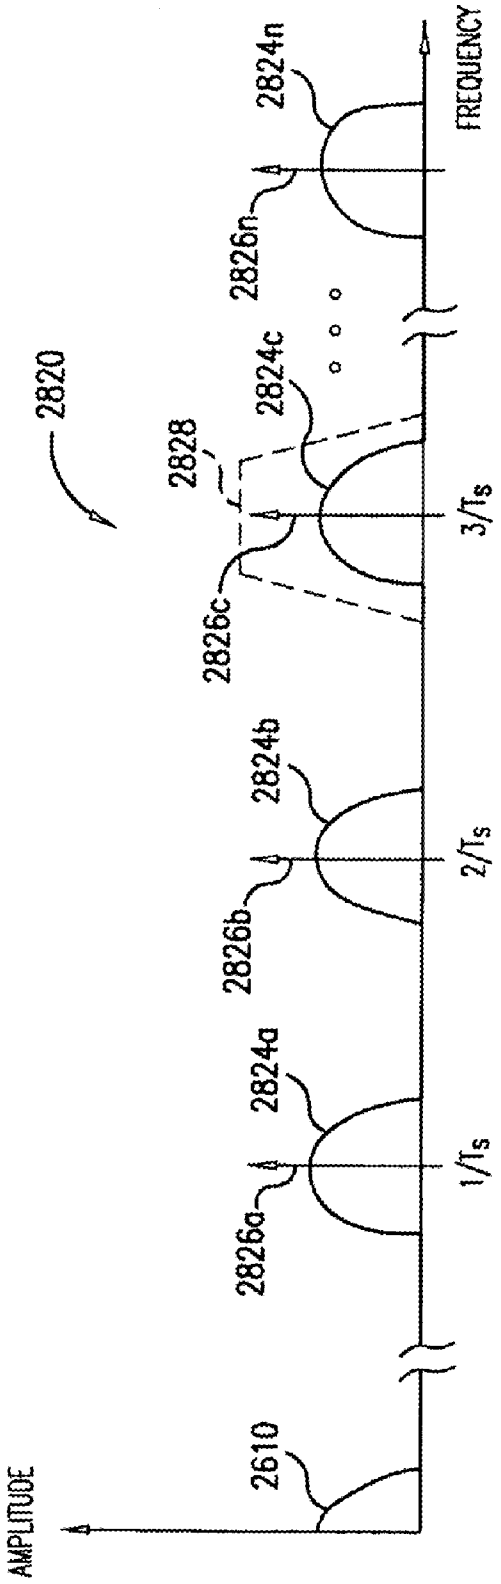

2820
AMPLITUDE
FREQUENCY
2610
2824a
2826a
2824b
2826b
2824c
2826c
2828
2824n
2826n
1/Ts
2/Ts
3/Ts

FIG.28B

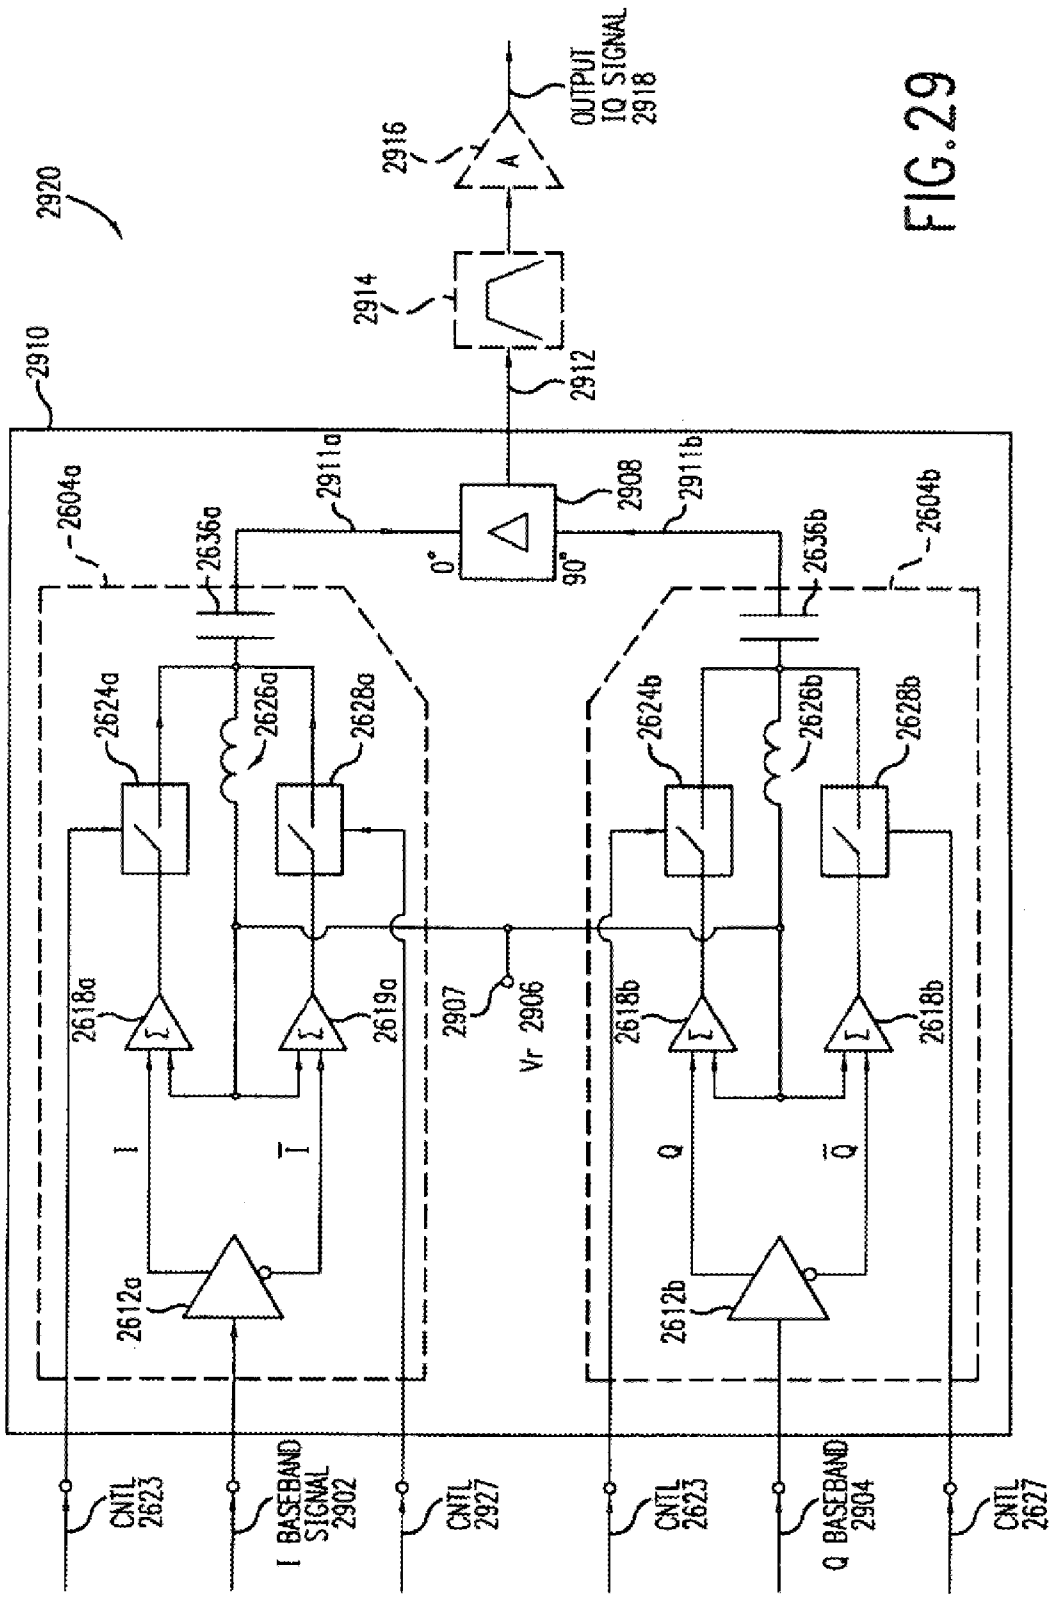

2920
2916
OUTPUT IQ SIGNAL 2918
2914
2912
2910
2911a
2908
2911b
2604a
2636a
0°
90°
2636b
2604b
2624a
2626a
2628a
2624b
2626b
2628b
2618a
2619a
2907
Vr 2906
2618b
I
Ī
Q
Q̄
2612a
2612b
CNTL 2623
I BASEBAND SIGNAL 2902
CNTL 2927
CNTL 2623
Q BASEBAND 2904
CNTL 2627

FIG. 29

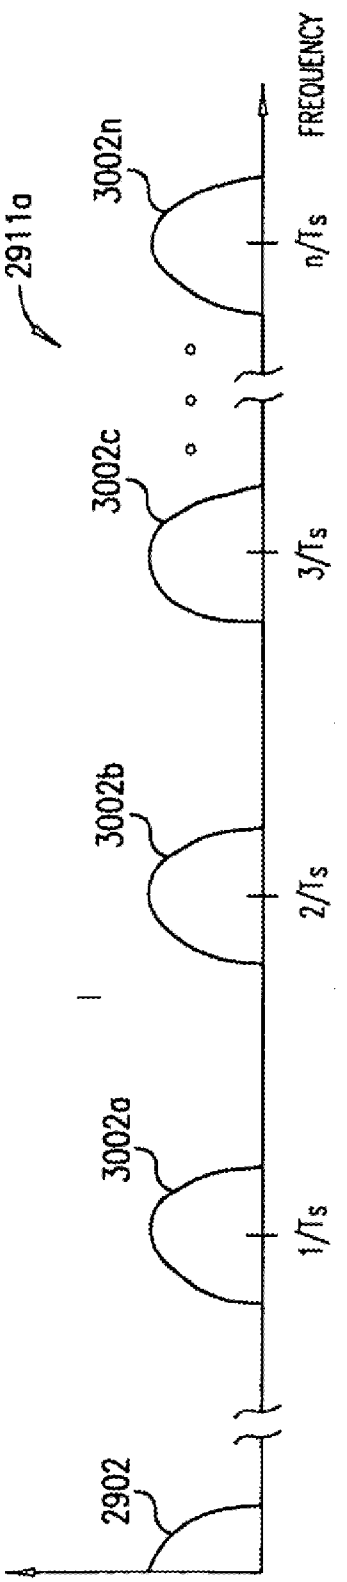


FIG.30A

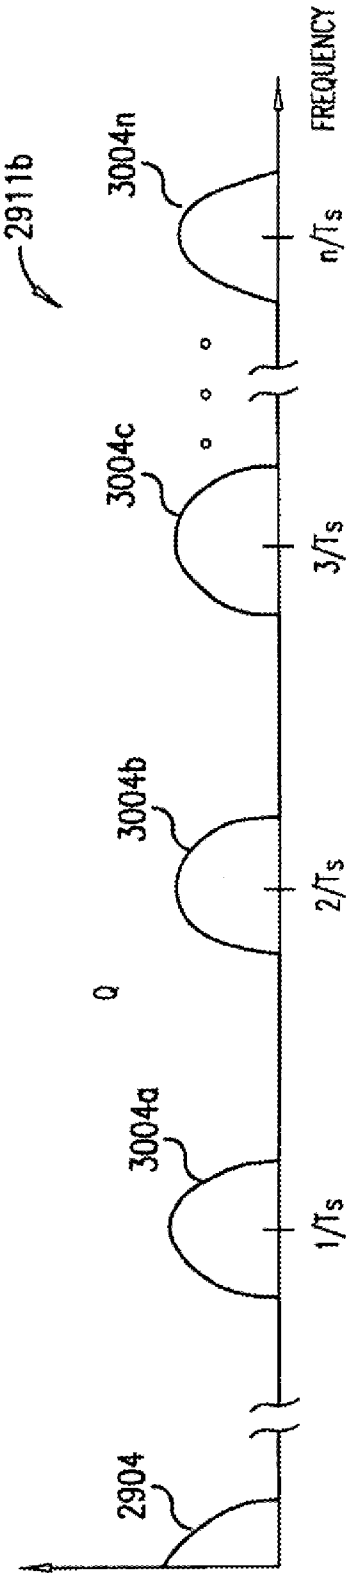


FIG.30B

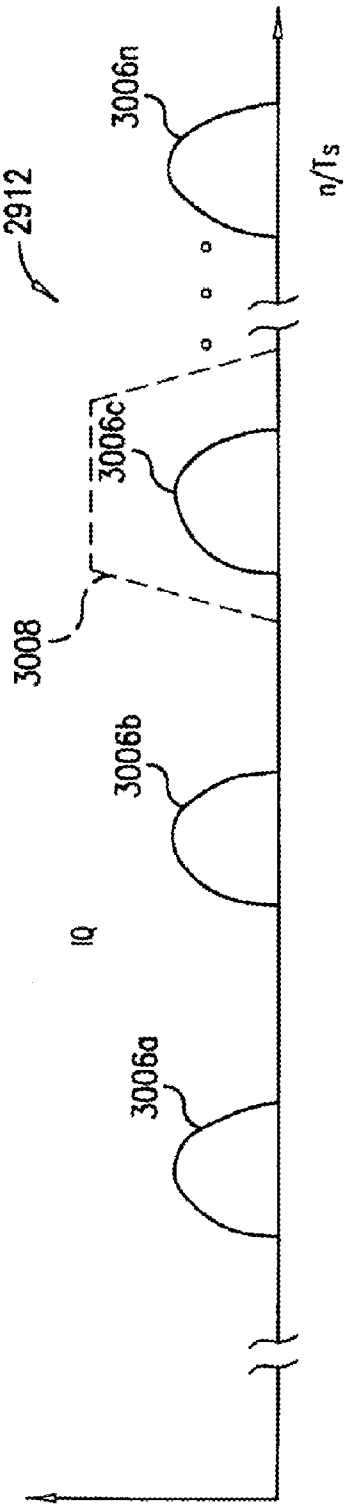


FIG.30C

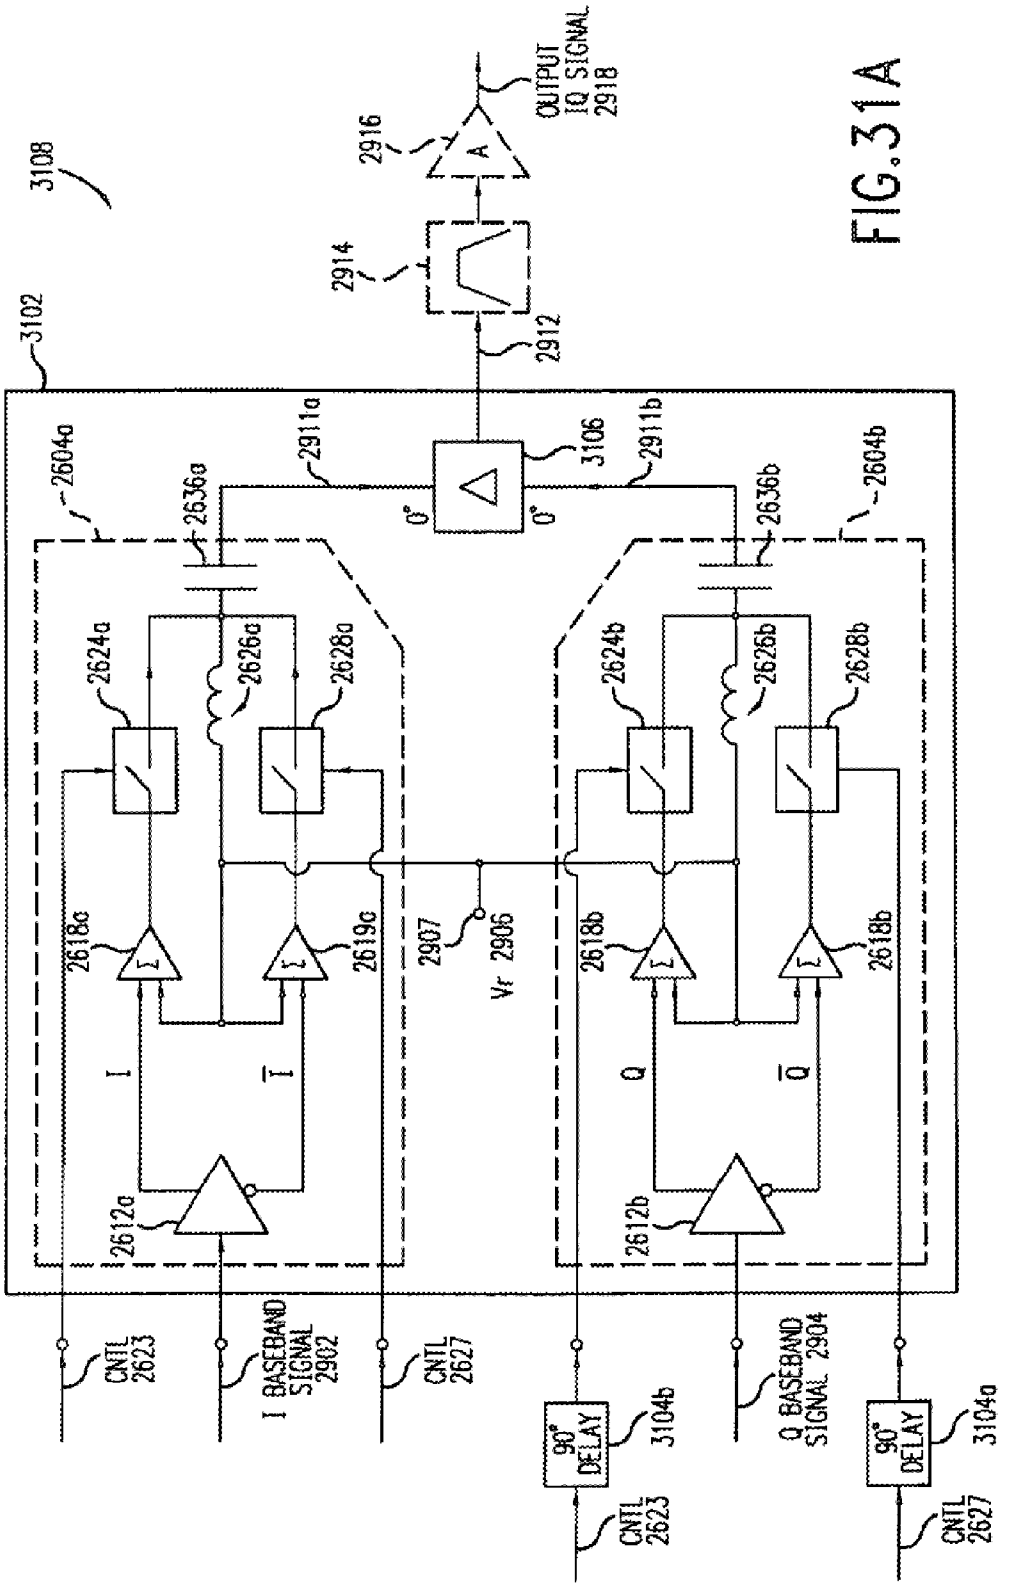

3108
3102
2916
OUTPUT IQ SIGNAL 2918
2914
2912
2911a
2911b
3106
0°
0°
2604a
2604b
2636a
2636b
2624a
2626a
2628a
2624b
2626b
2628b
2618a
2619a
2907
Vr 2905
2618b
I
Ī
Q
Q̄
2612a
2612b
CNTL 2623
I BASEBAND SIGNAL 2902
CNTL 2627
90° DELAY
3104b
Q BASEBAND SIGNAL 2904
90° DELAY
3104a
CNTL 2623
CNTL 2627

FIG.31A

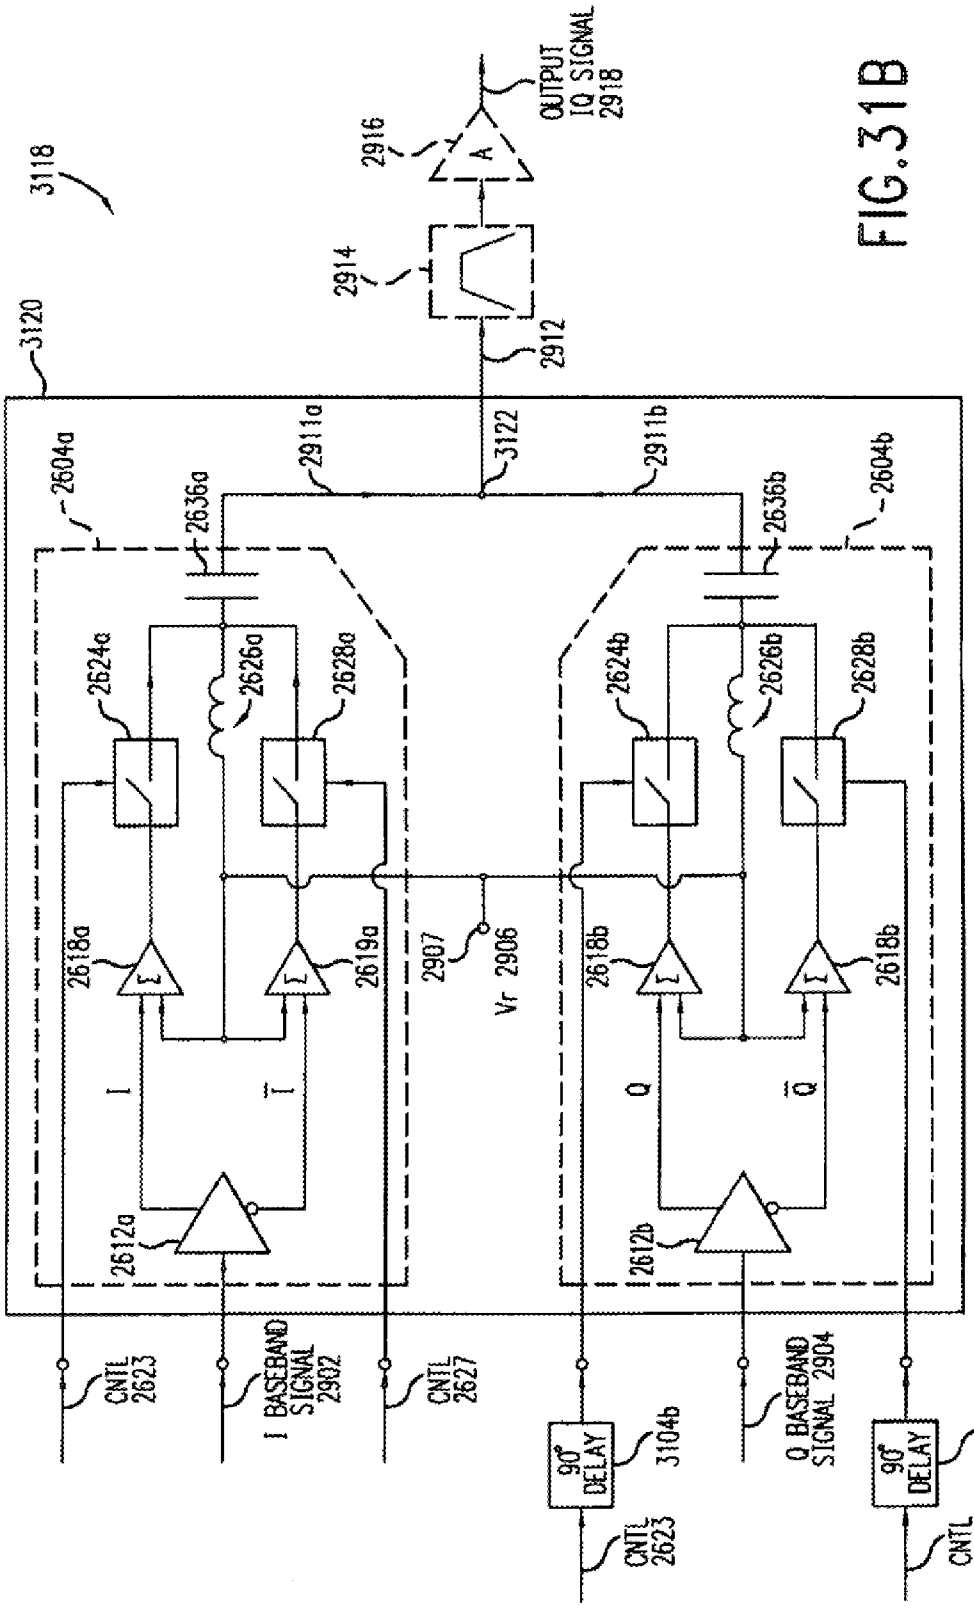

3118
3120
2916
OUTPUT IQ SIGNAL 2918
2914
2912
3122
2911a
2911b
2604a
2604b
2636a
2636b
2624a
2626a
2628a
2624b
2626b
2628b
2618a
2619a
2618b
2907
Vr 2906
I
Ī
Q
Q̄
2612a
2612b
CNTL 2623
I BASEBAND SIGNAL 2902
CNTL 2627
Q BASEBAND SIGNAL 2904
90° DELAY
3104b
3104a

FIG. 31B

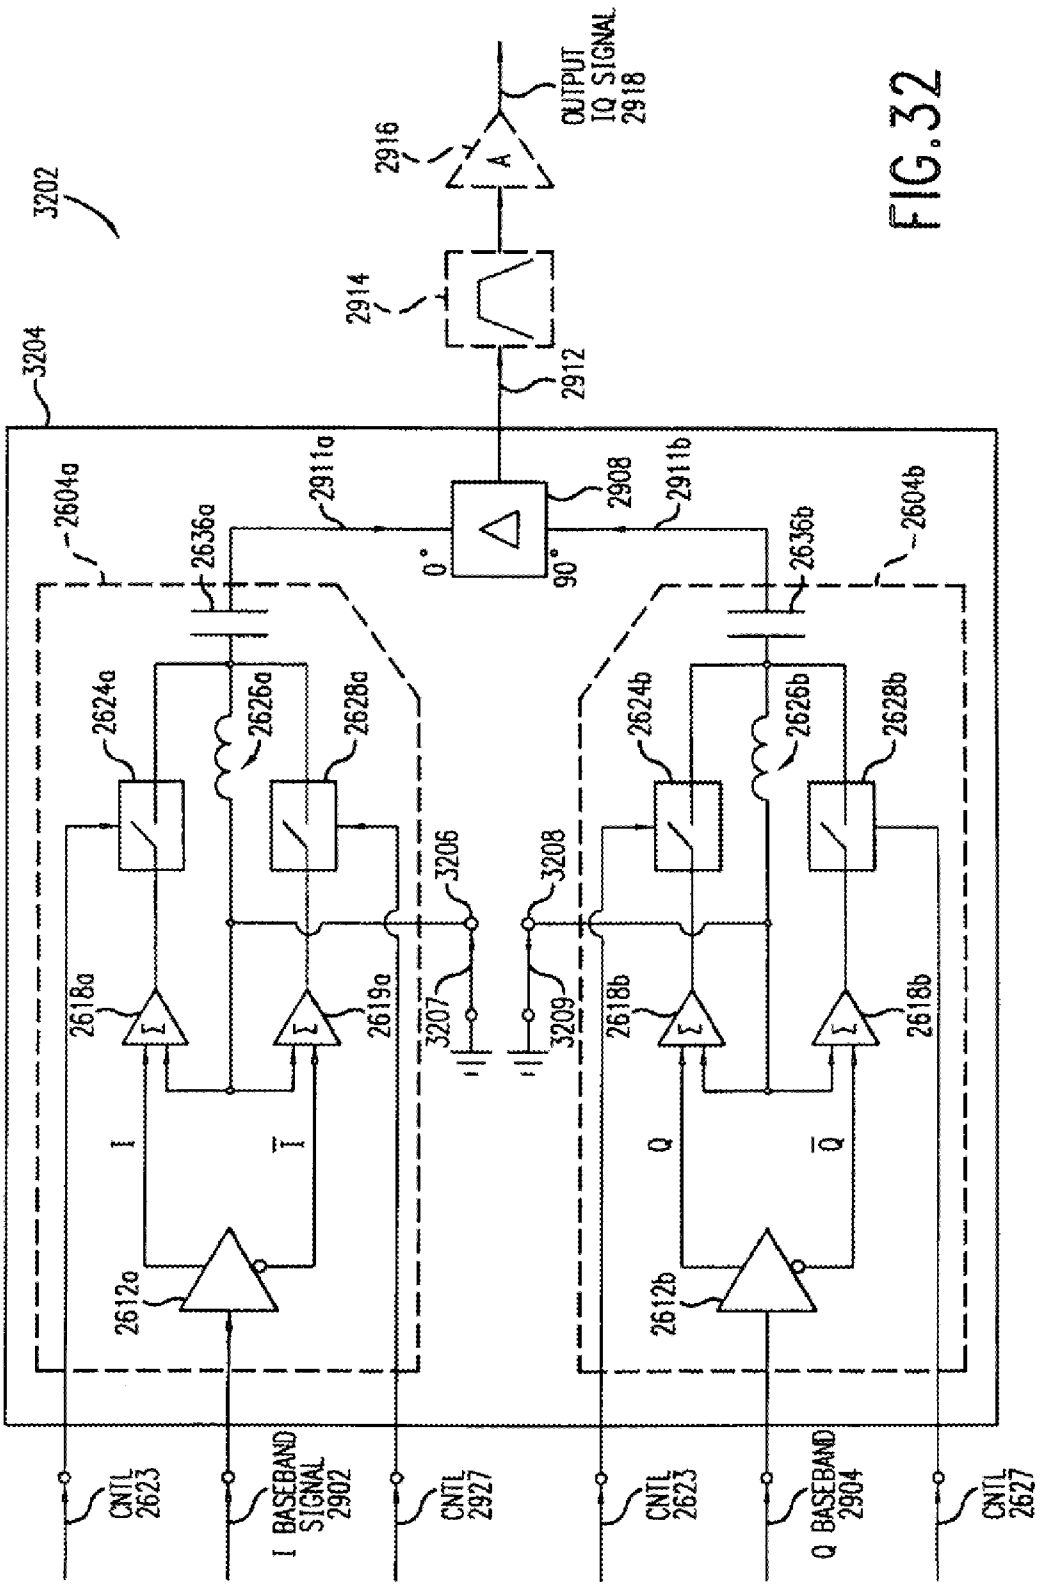

3202
3204
2916
OUTPUT IQ SIGNAL 2918
2914
2912
2911a
2908
2911b
2604a
2636a
2636b
2604b
0°
90°
2624a
2626a
2628a
2624b
2626b
2628b
3206
3208
3207
3209
2618a
2619a
2618b
I
Ī
Q
Q̄
2612a
2612b
CNTL 2623
I BASEBAND SIGNAL 2902
CNTL 2927
CNTL 2623
Q BASEBAND 2904
CNTL 2627

FIG. 32

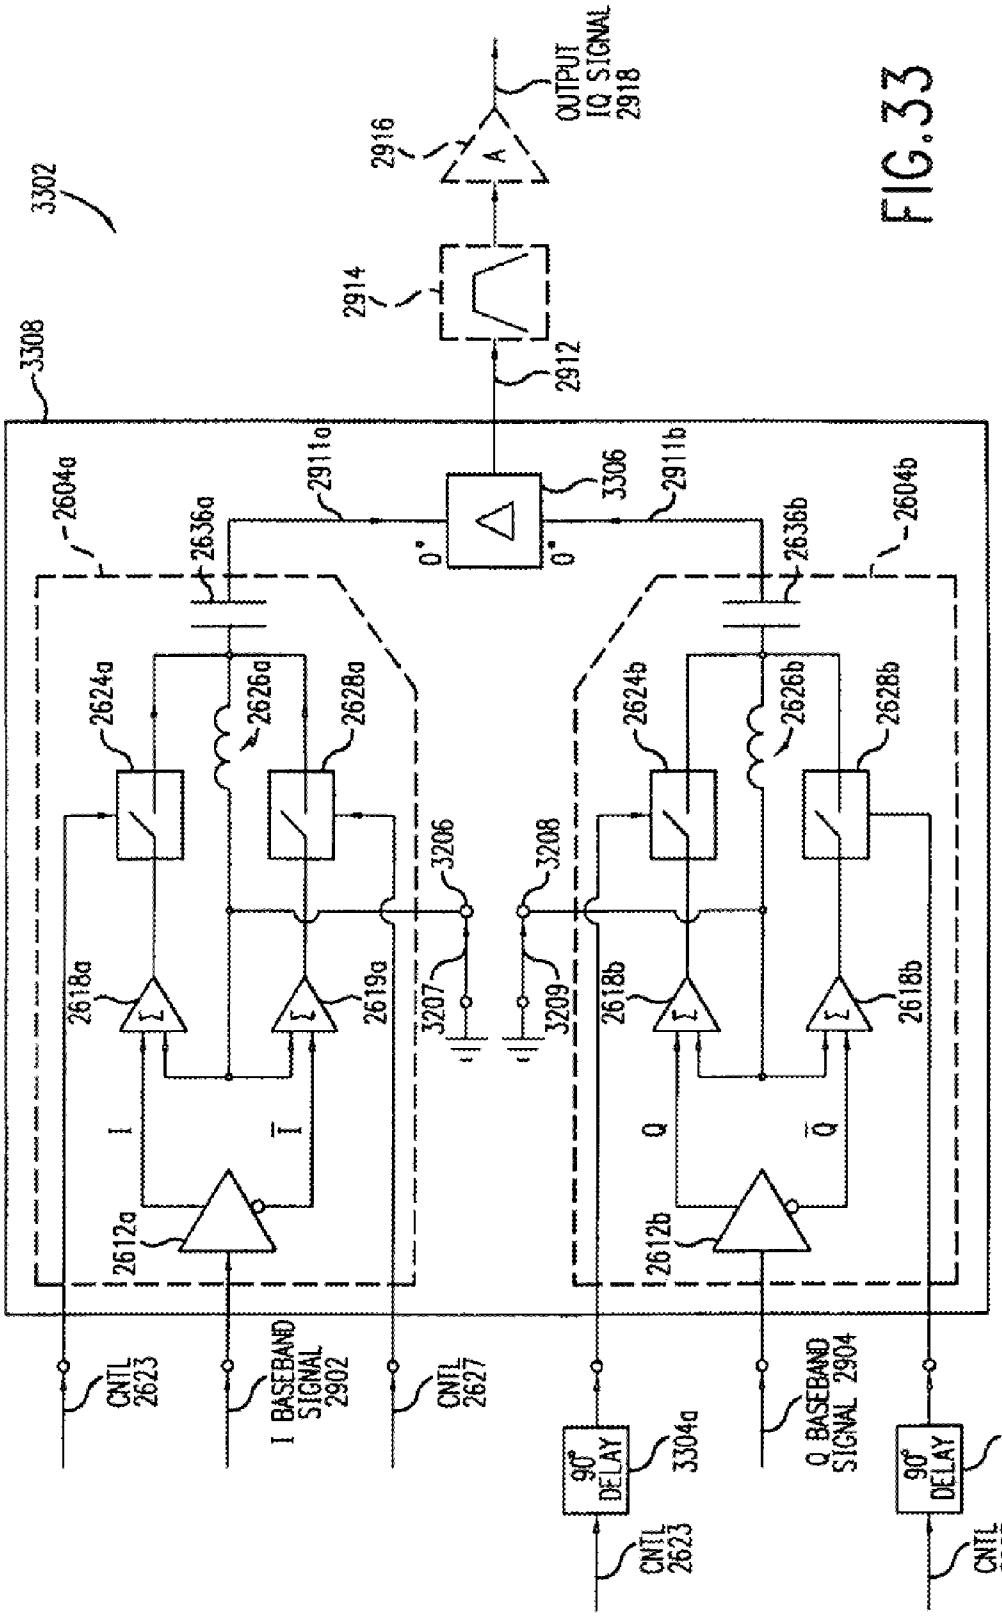

3302
3308
2916
OUTPUT IQ SIGNAL 2918
2914
2912
2911a
2911b
3306
0°
0°
2604a
2604b
2636a
2636b
2624a
2626a
2628a
2624b
2626b
2628b
3206
3208
3207
3209
2618a
2619a
2618b
I
Ī
Q
Q̄
2612a
2612b
CNTL 2623
I BASEBAND SIGNAL 2902
CNTL 2627
Q BASEBAND SIGNAL 2904
90° DELAY
3304a
3304b

FIG. 33

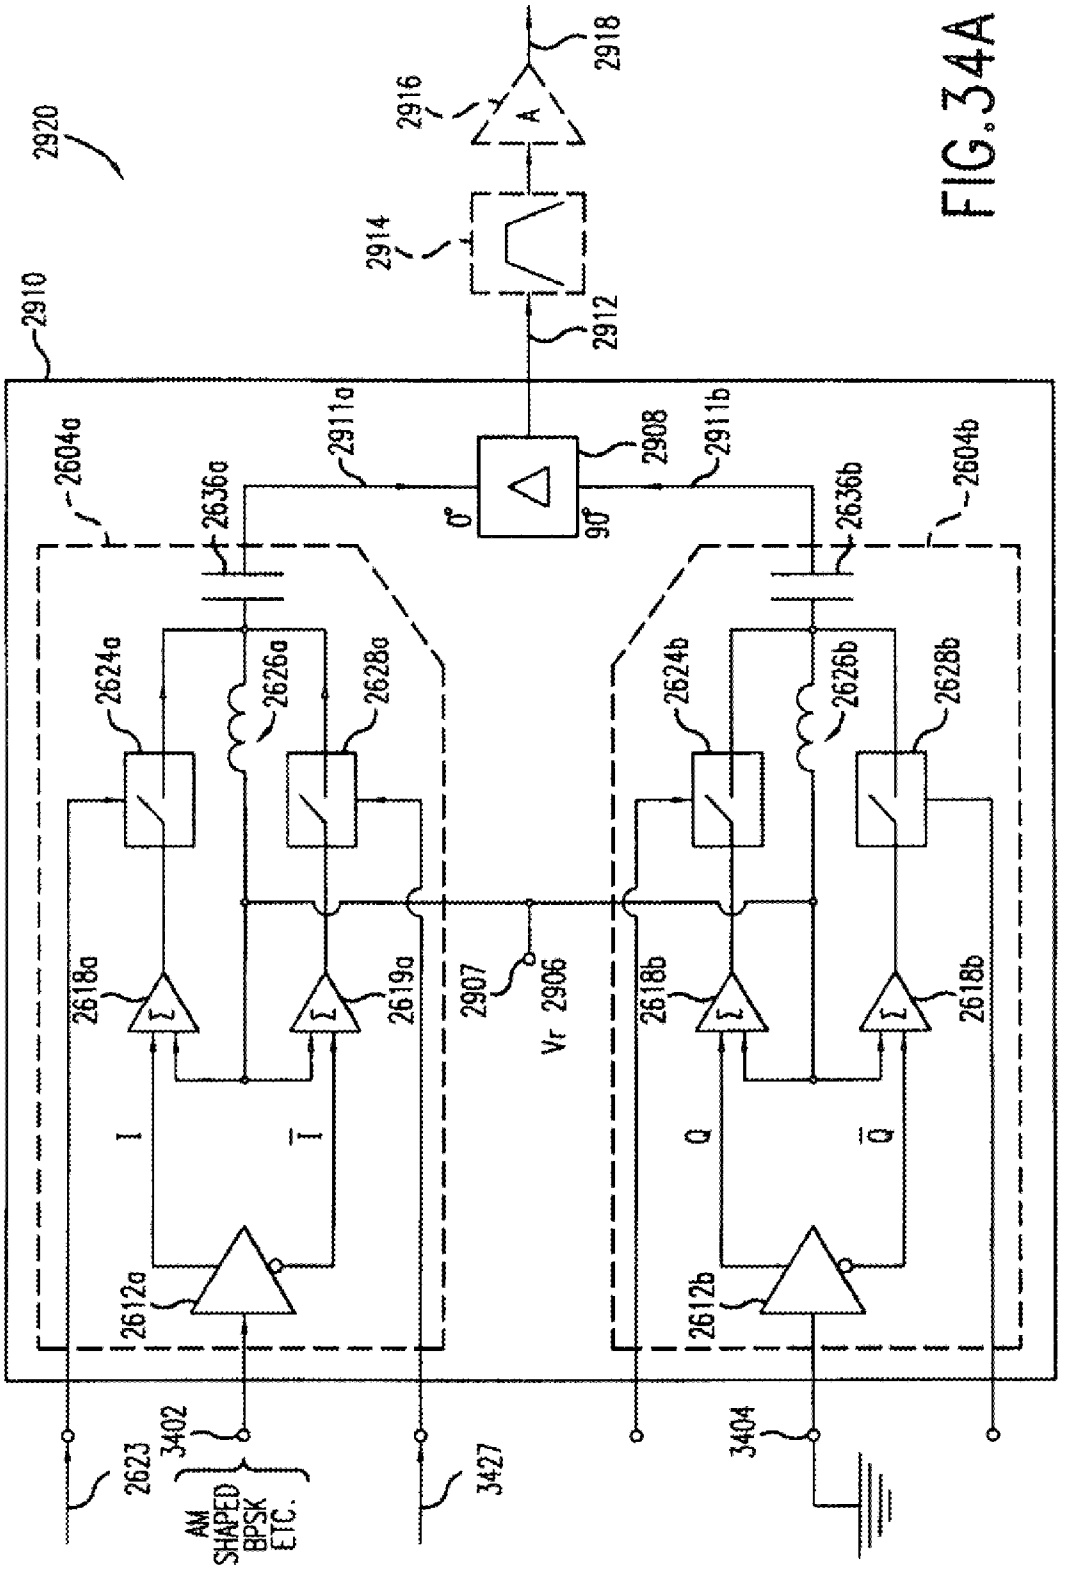

2920
2916
2918
2914
2912
2910
2911a
2908
2911b
2604a
2636a
0°
90°
2636b
2604b
2624a
2626a
2628a
2624b
2626b
2628b
2618a
2619a
2907
Vr 2906
2618b
2618b
I
Ī
Q
Q̄
2612a
2612b
2623
3402
AM SHAPED BPSK ETC.
3427
3404

FIG. 34A

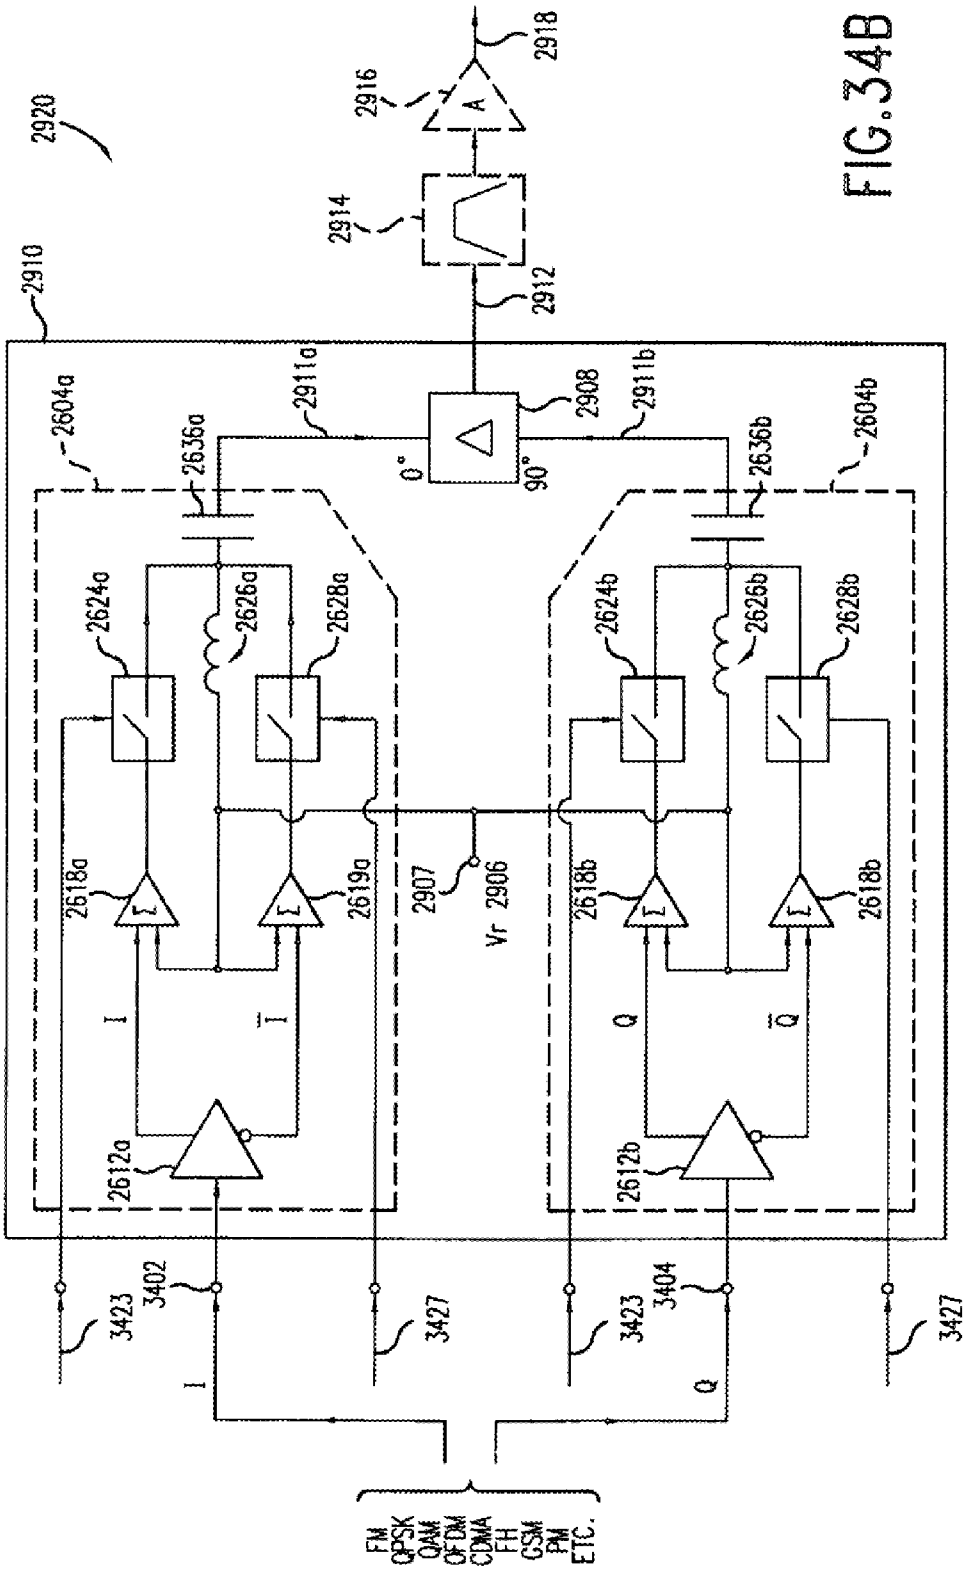

2920
2916
2918
2914
2912
2910
2911a
2908
2911b
2604a
2636a
0°
90°
2636b
2604b
2624a
2626a
2628a
2624b
2626b
2628b
2618a
2619a
2907
Vr 2906
2618b
I
Ī
Q
Q̄
2612a
2612b
3423
3402
3427
3404
FM
QPSK
QAM
OFDM
CDMA
FH
GSM
PM
ETC.

FIG. 34B

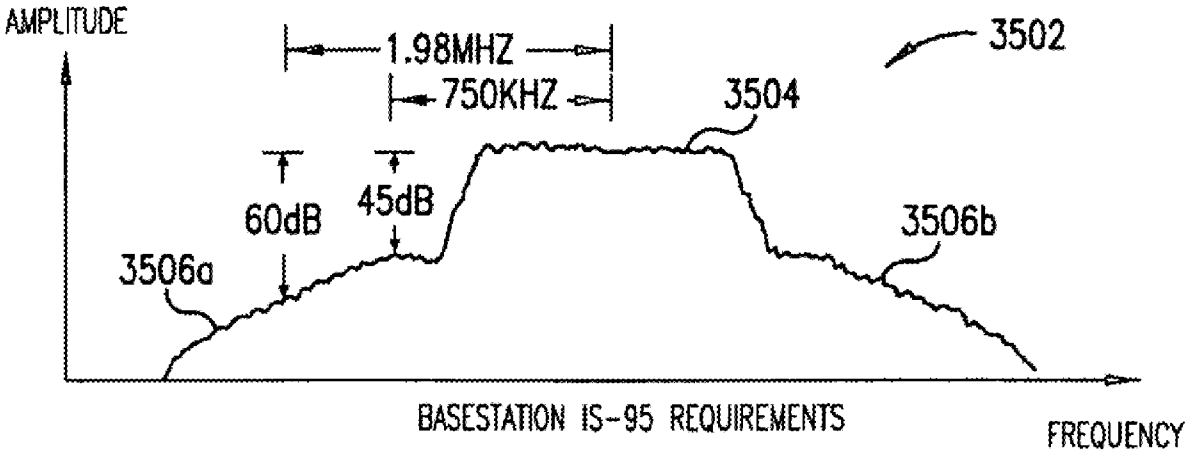


FIG.35A

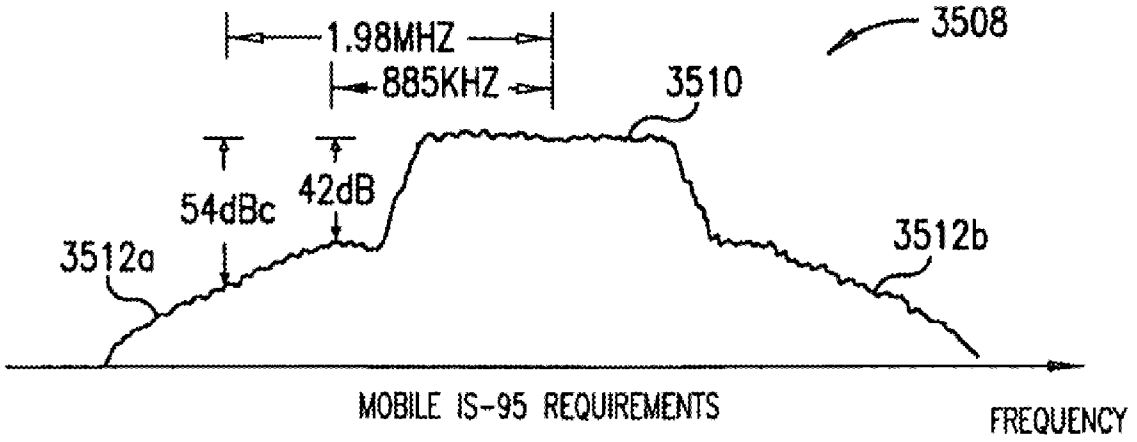


FIG.35B

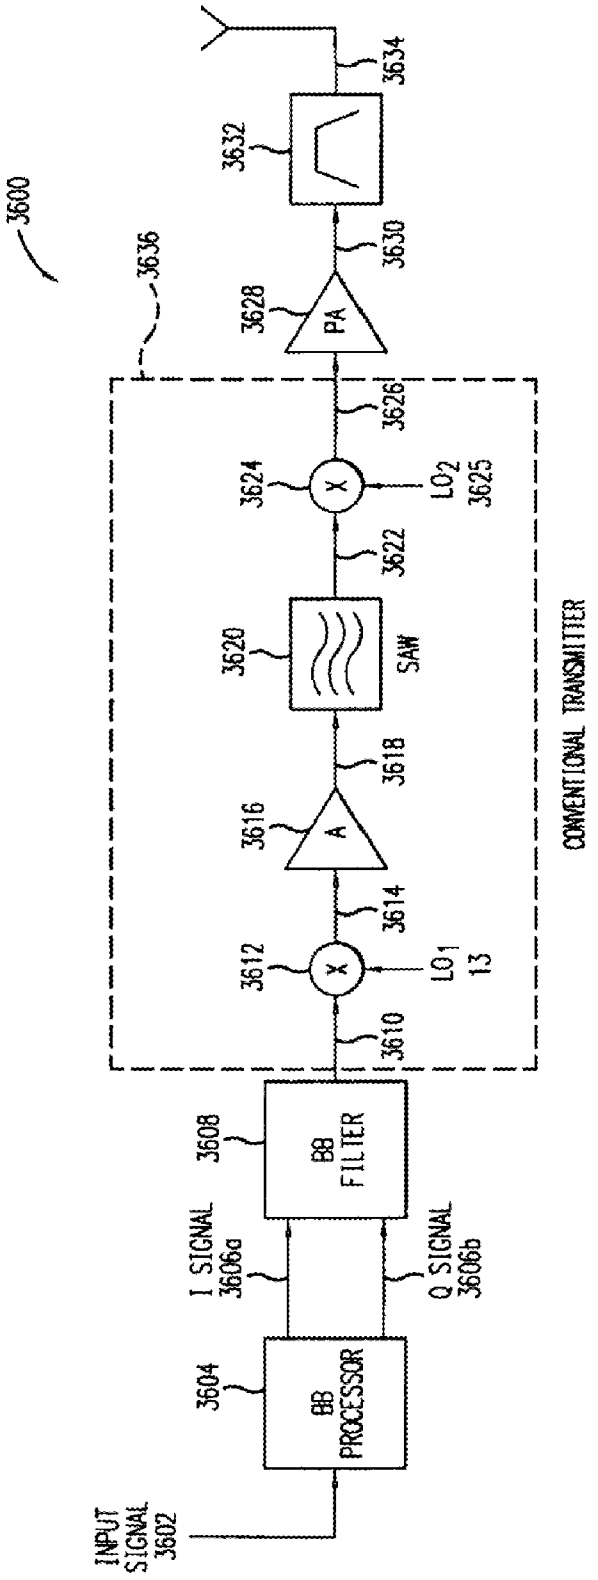

3600
3636
3634
3632
3630
3628
PA
3626
3624
X
LO2
3625
3622
3620
SAW
3618
3616
A
3614
3612
X
LO1
13
3610
CONVENTIONAL TRANSMITTER
3608
BB FILTER
I SIGNAL 3606a
Q SIGNAL 3606b
3604
BB PROCESSOR
INPUT SIGNAL 3602

FIG.36

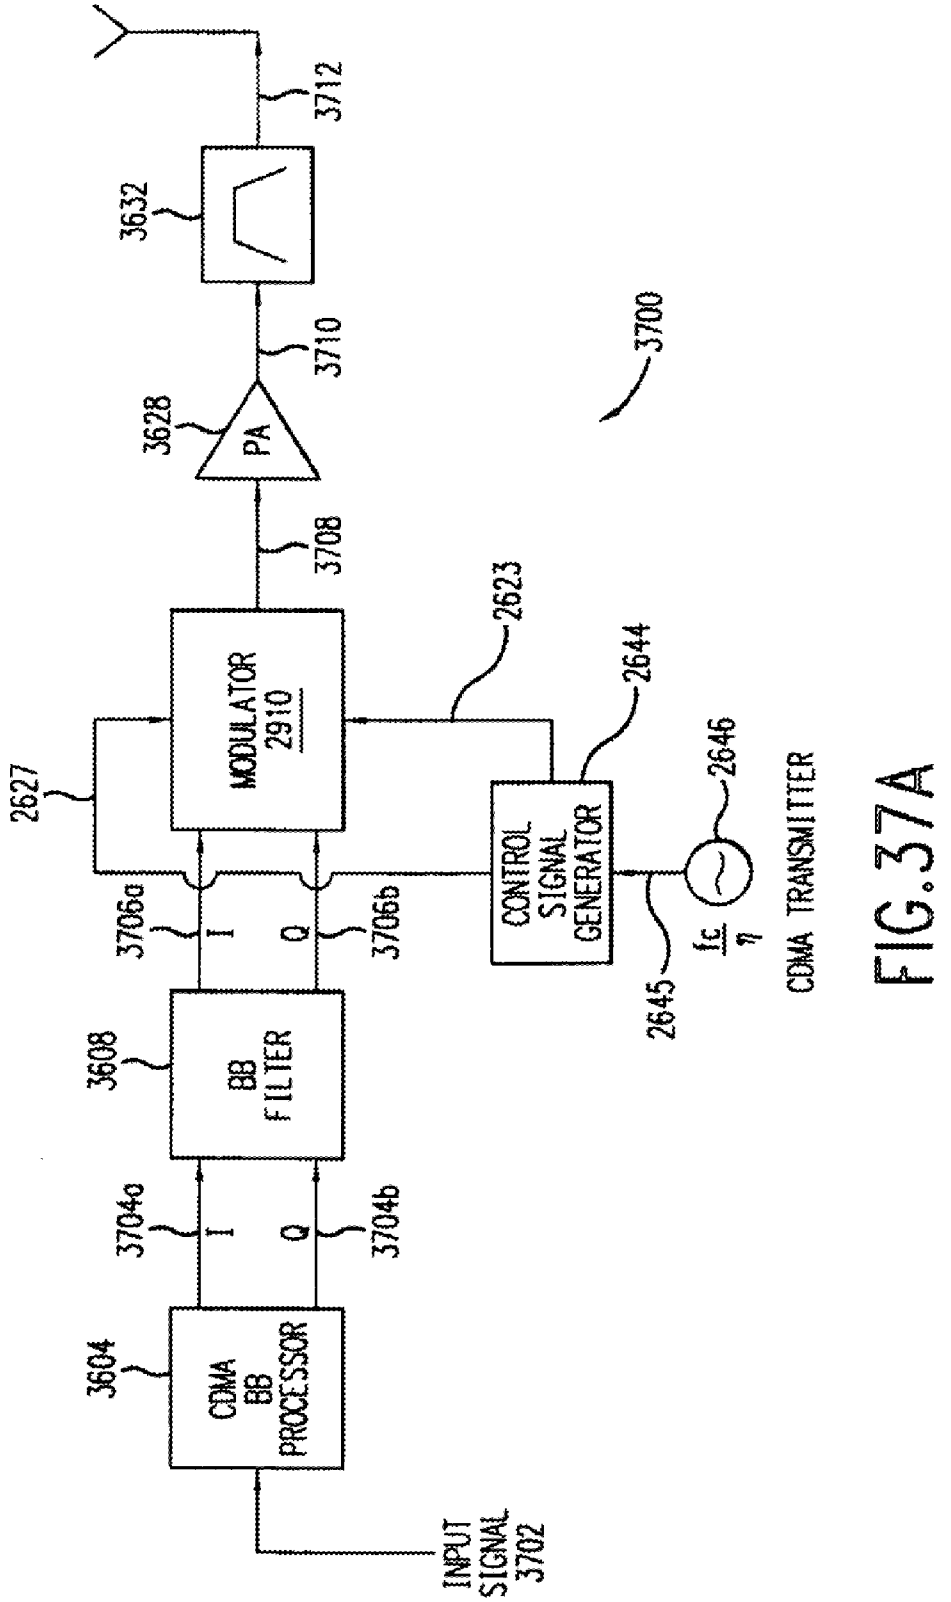

3712
3632
3710
3628
PA
3708
3700
2623
2644
2627
MODULATOR
2910
2646
3706a
I
Q
3706b
CONTROL
SIGNAL
GENERATOR
3608
BB
FILTER
2645
fc
η
CDMA TRANSMITTER
3704a
I
Q
3704b
3604
CDMA
BB
PROCESSOR
INPUT
SIGNAL
3702

FIG. 37A

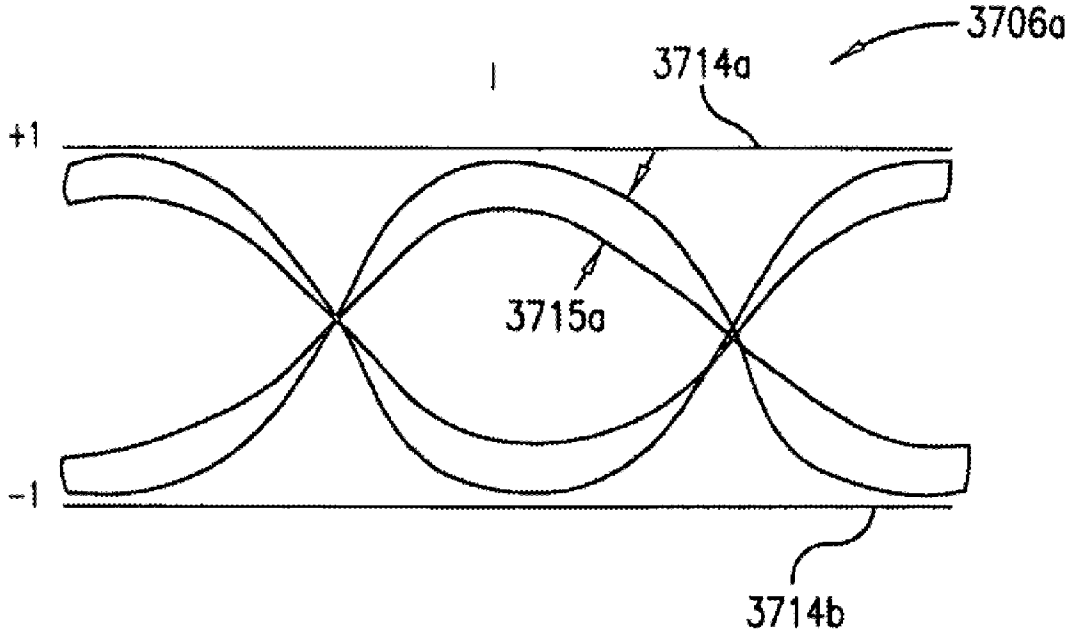


FIG.37B

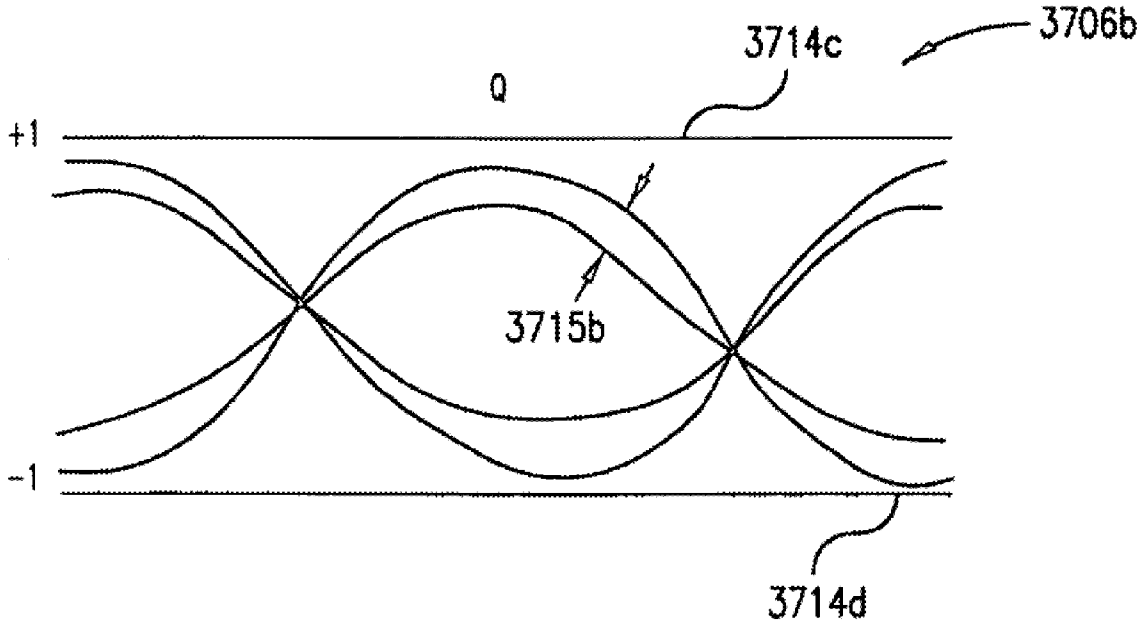


FIG.37C

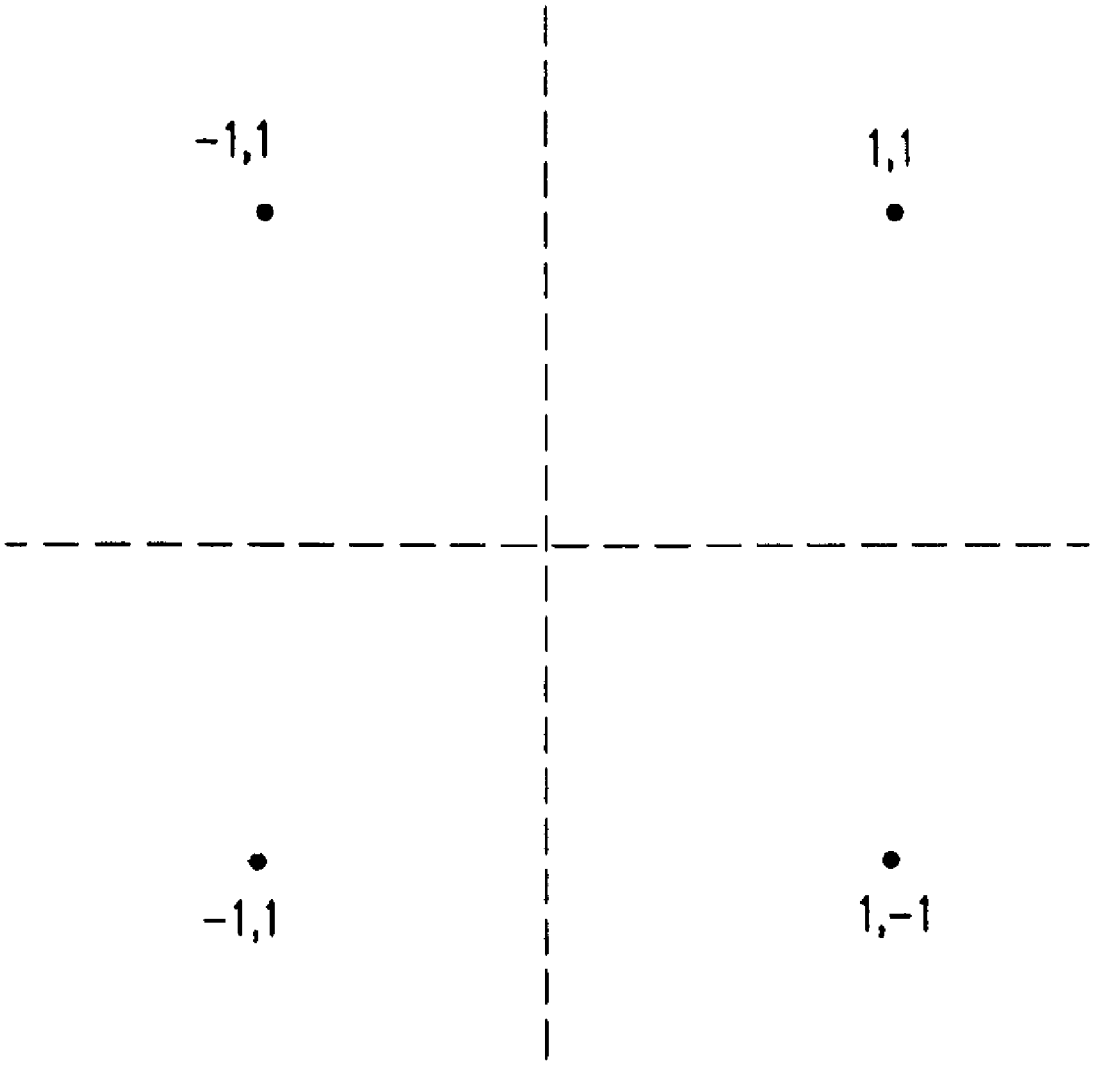


FIG.37D

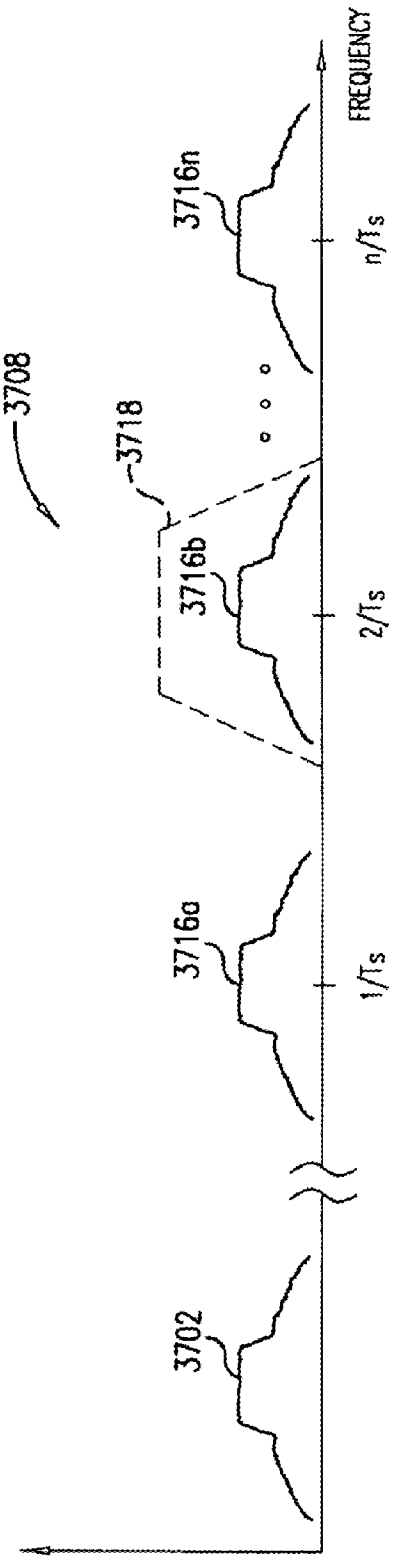


FIG.37E

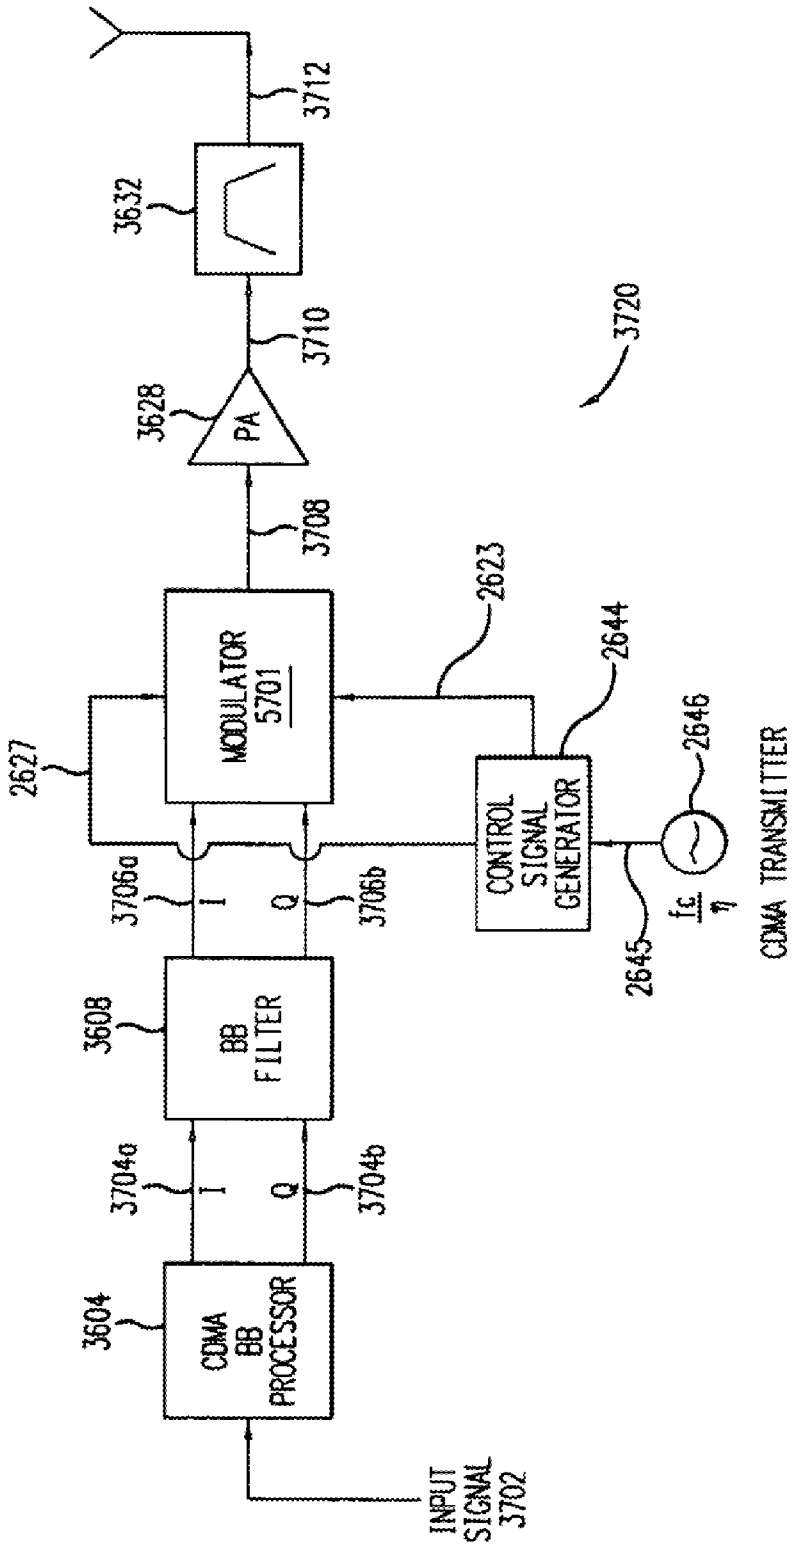

3712
3632
3710
3628
PA
3720
3708
2623
2644
2646
MODULATOR
5701
2627
CONTROL
SIGNAL
GENERATOR
3706a
I
Q
3706b
2645
fc/η
CDMA TRANSMITTER
3608
BB
FILTER
3704a
I
Q
3704b
3604
CDMA
BB
PROCESSOR
INPUT
SIGNAL
3702

FIG.37F

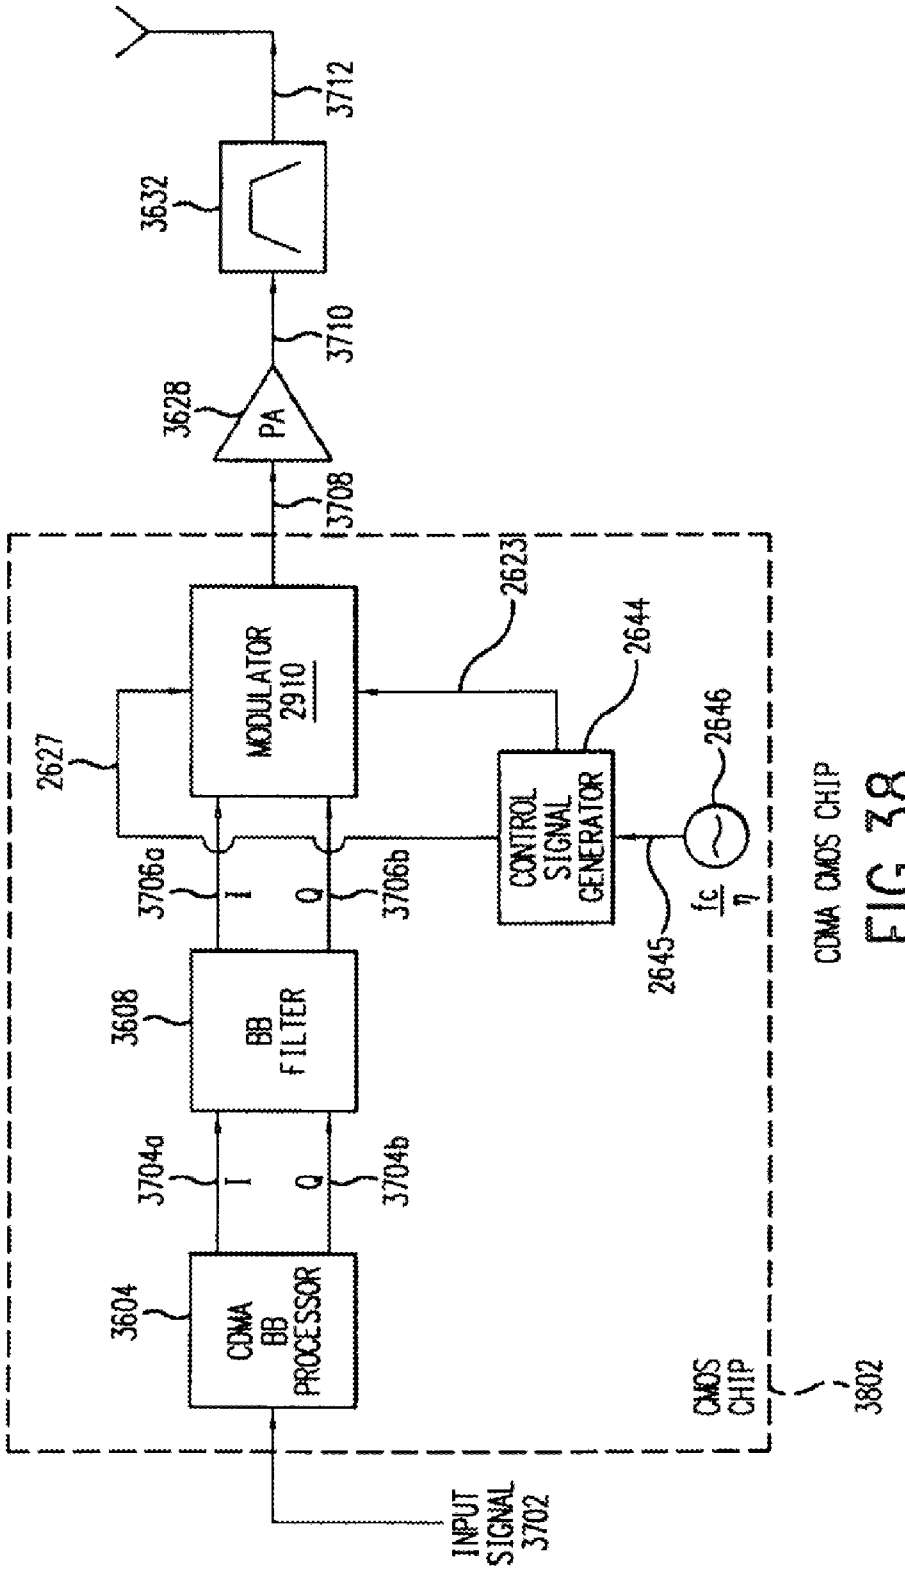

3712
3632
3710
3628
PA
3708
MODULATOR 2910
2623
2644
2627
2646
3706a
I
Q
3706b
CONTROL SIGNAL GENERATOR
fc/η
2645
3608
BB FILTER
3704a
I
Q
3704b
3604
CDMA BB PROCESSOR
CMOS CHIP
3802
CDMA CMOS CHIP
INPUT SIGNAL 3702

FIG. 38

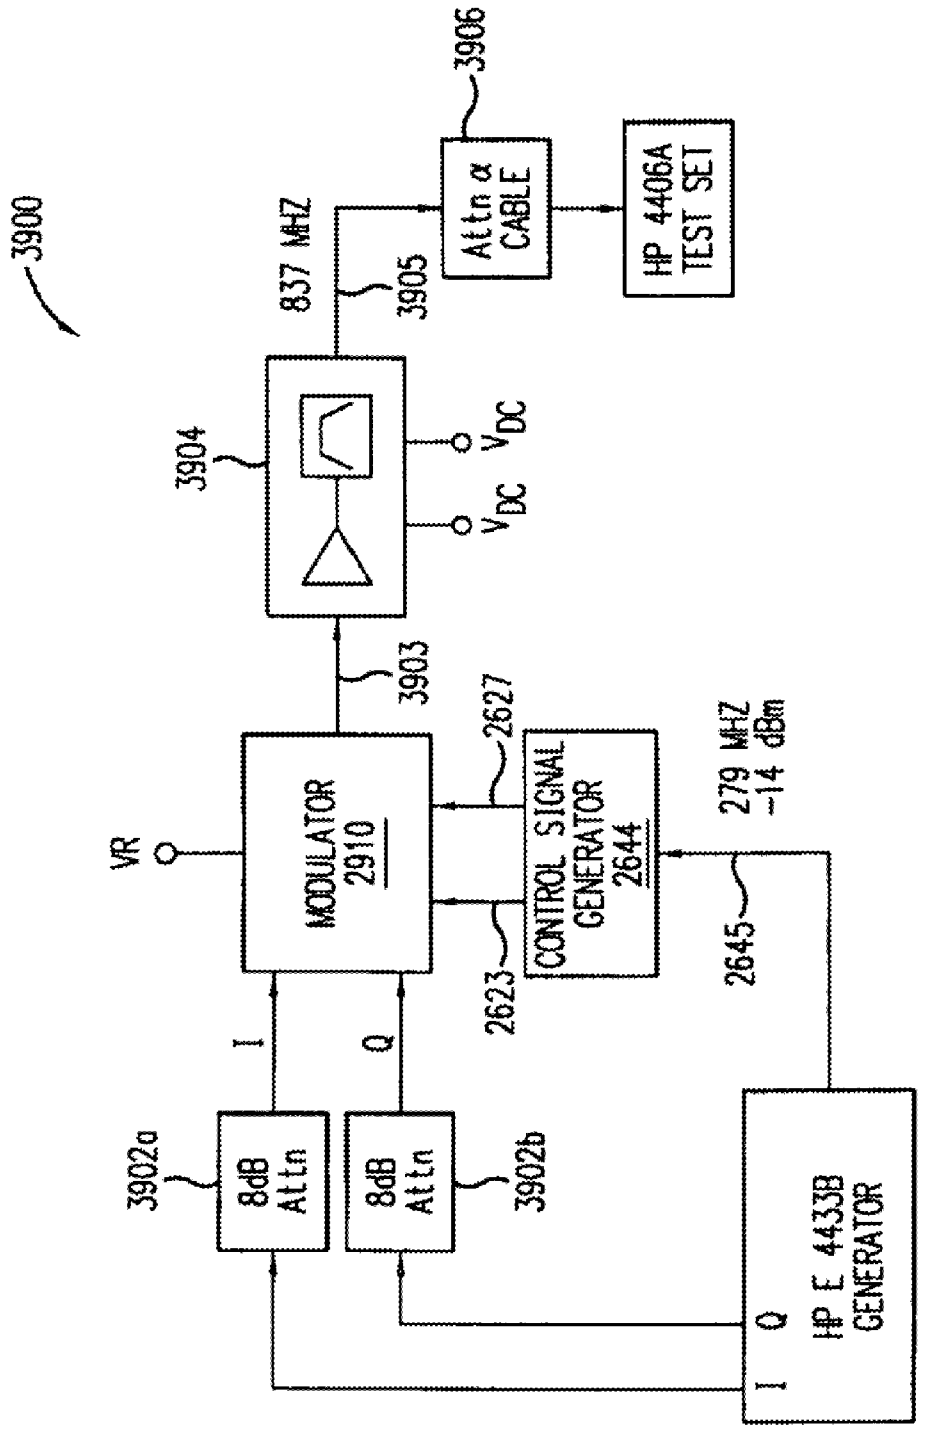

3900
3906
Attn α CABLE
HP 4406A TEST SET
837 MHZ
3905
3904
V_{DC}
V_{DC}
3903
2627
MODULATOR 2910
CONTROL SIGNAL GENERATOR 2644
279 MHZ -14 dBm
VR
2623
2645
I
Q
3902a
8dB Attn
8dB Attn
3902b
I Q
HP E 4433B GENERATOR

FIG. 39

4002

BASE STATION

RHO	0.9970
EVM	5.51%
PHASE ERROR	1.80°
MAGNITUDE ERROR	4.53%
CARRIER INSERTION	-37.91 dB
PA POWER OUT	28.06 dBm


FIG.40

FREQUENCY (MHz) (MOBILE STATION)

4102

	LOW	MIDDLE	HIGH
RHO	0.9892	0.9969	0.9892
EVM	10.39%	5.54%	10.39%
PHASE ERROR	4.47°	2.24°	4.08°
MAGNITUDE ERROR	6.84%	4.21%	8.27%
CARRIER INSERTION	-40.15 dB	-44.58 dB	-35.27 dB
PA POWER OUT	27.36 dBm	28.11 dBm	27.55 dBm

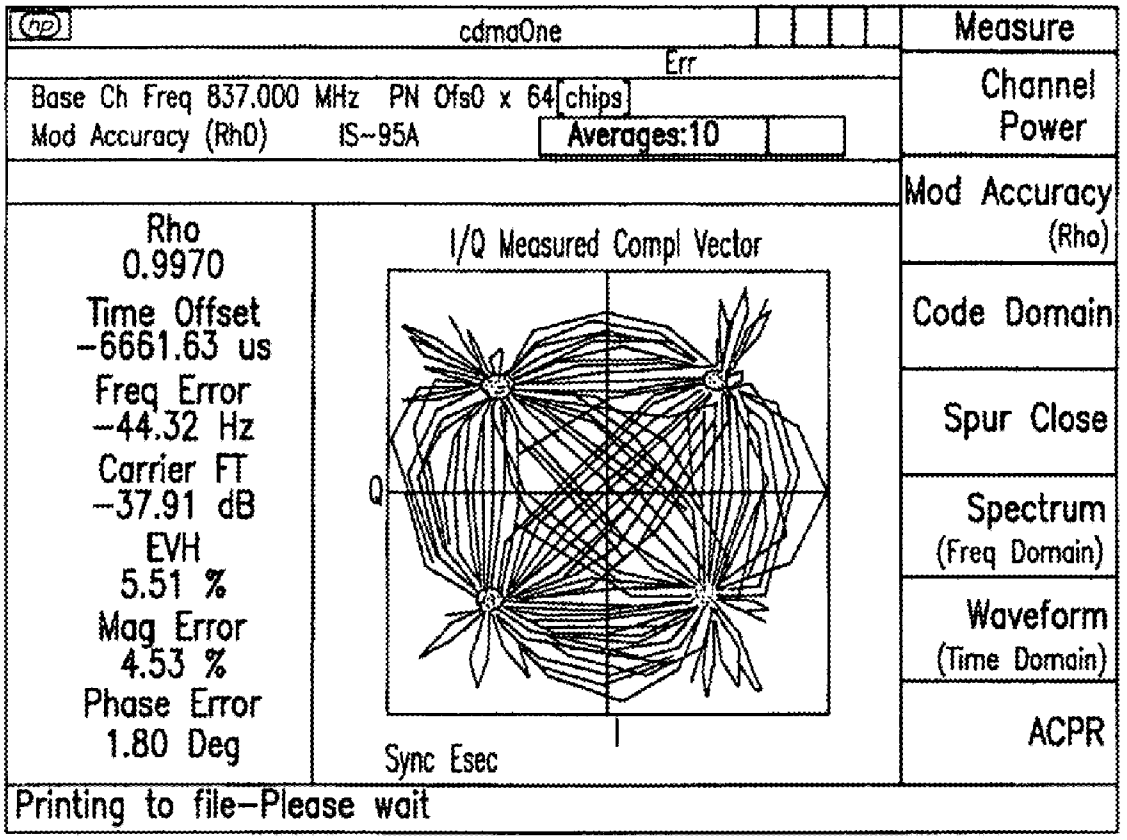
FIG.41



BASE STATION CONSTELLATION FOR PILOT CHANNEL TEST


FIG.42

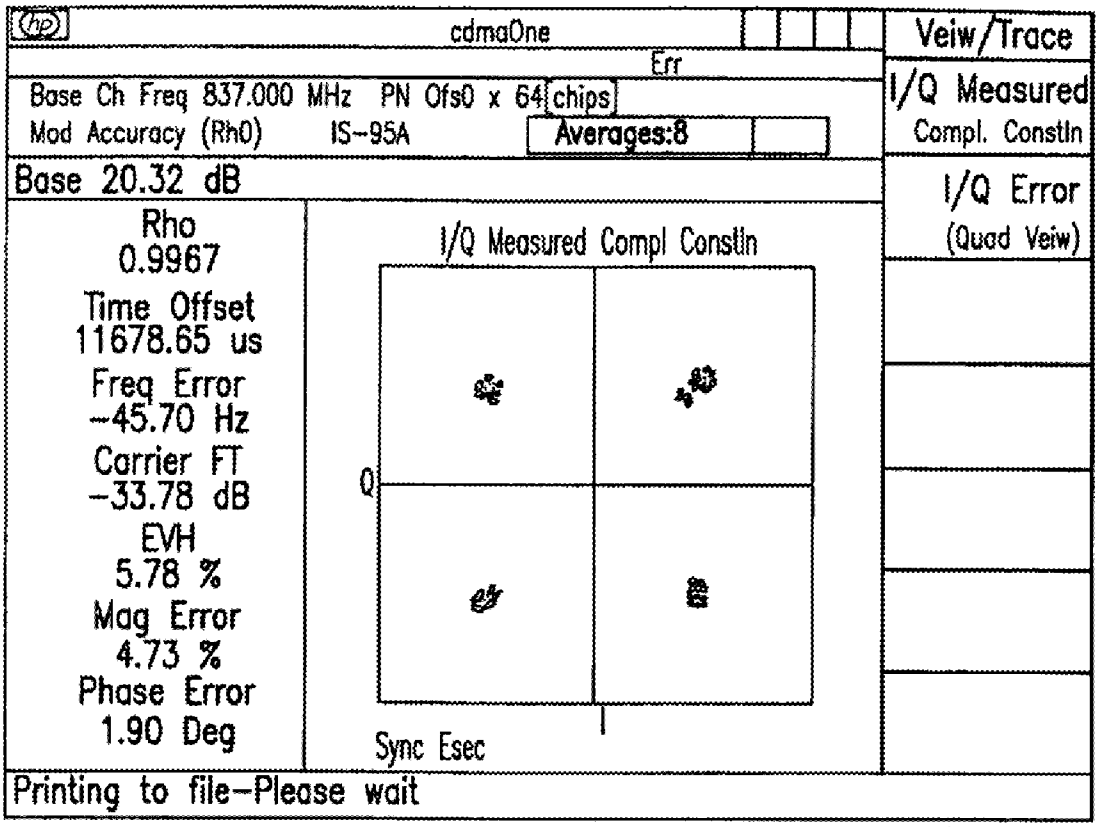4202



BASE STATION SAMPLED CONSTELLATION

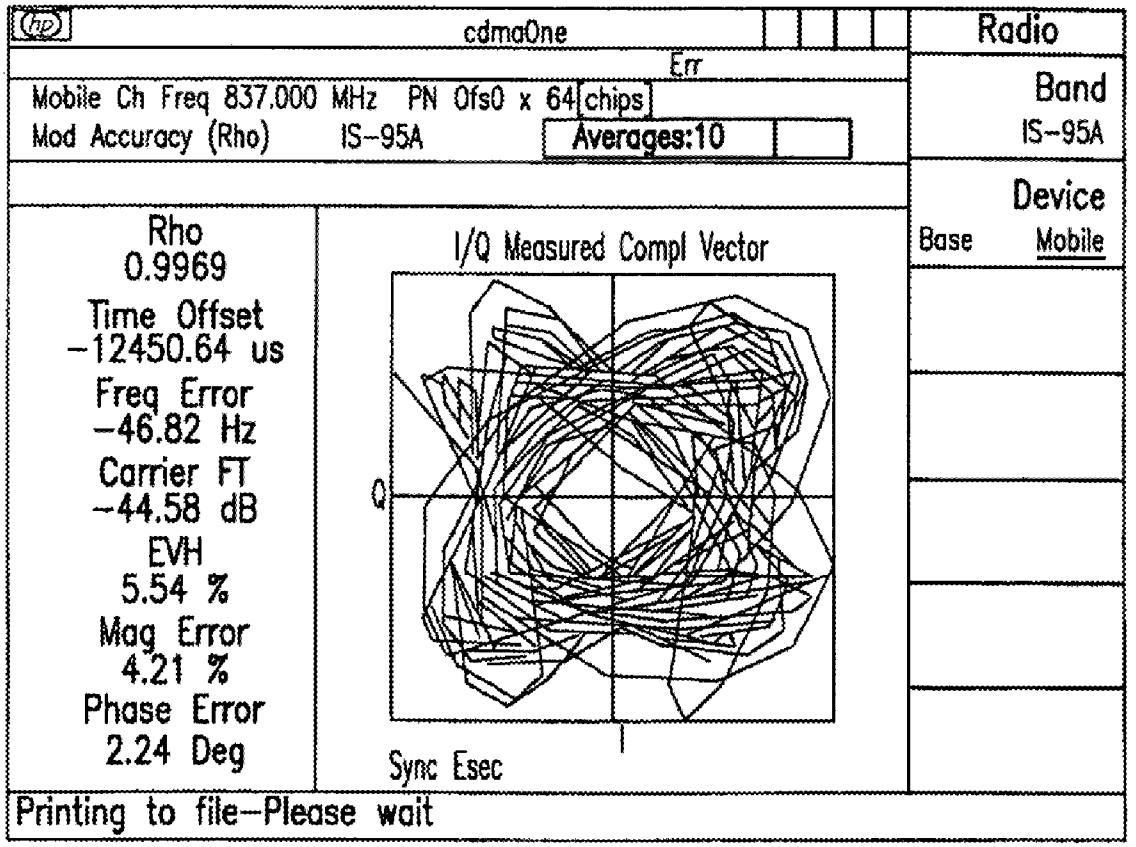
FIG.43



MOBILE STATION CONSTELLATION FOR ACCESS CHANNEL TEST

FIG.44

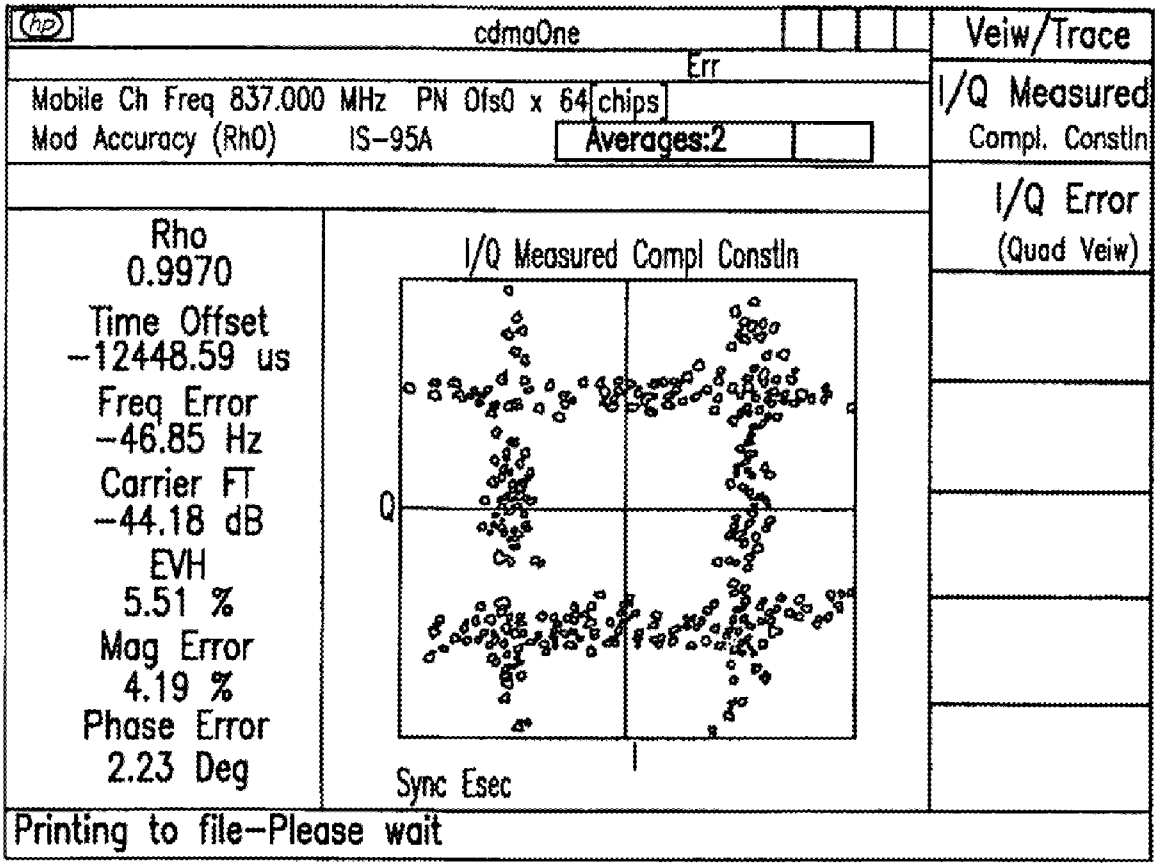
4402



MOBILE STATION SAMPLED CONSTELLATION

FIG. 45

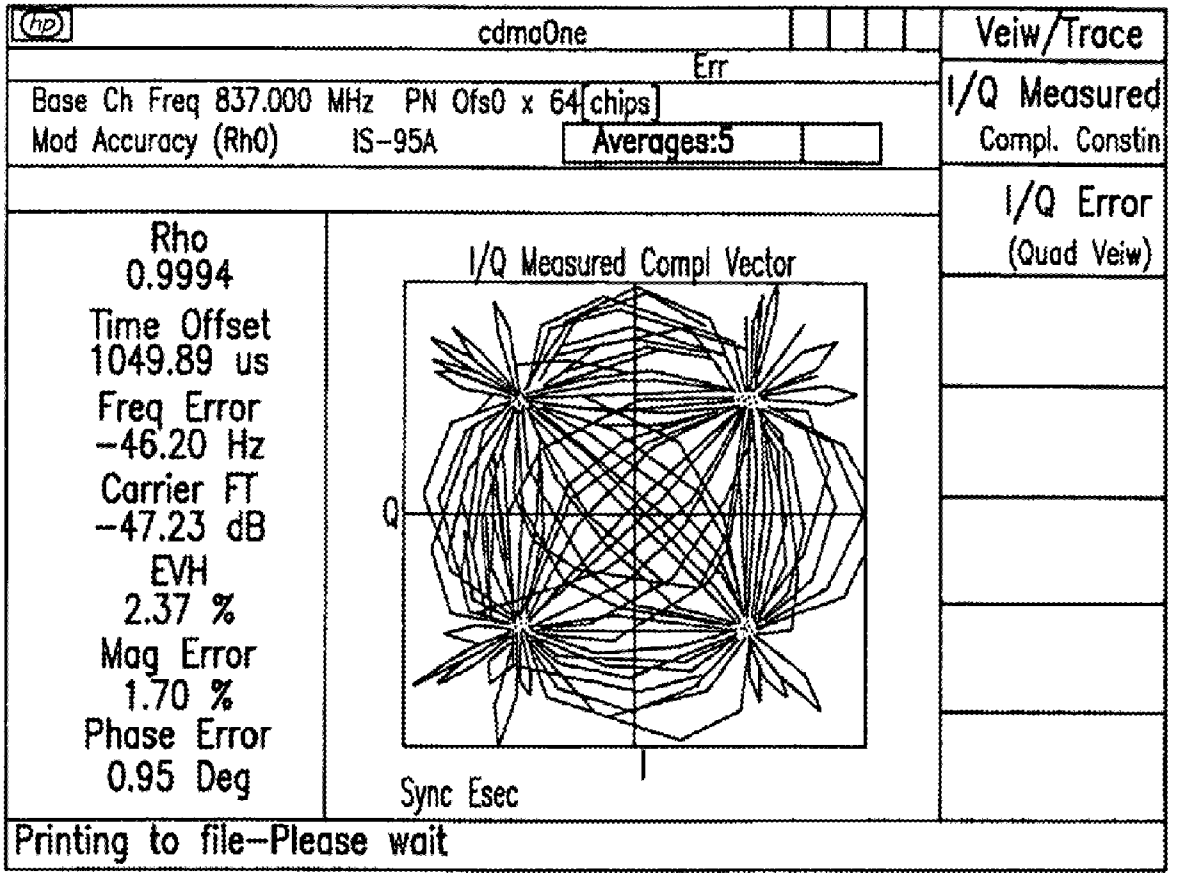
4502



BASE STATION CONSTELLATION USING ONLY H/P TEST EQUIPMENT

FIG.46

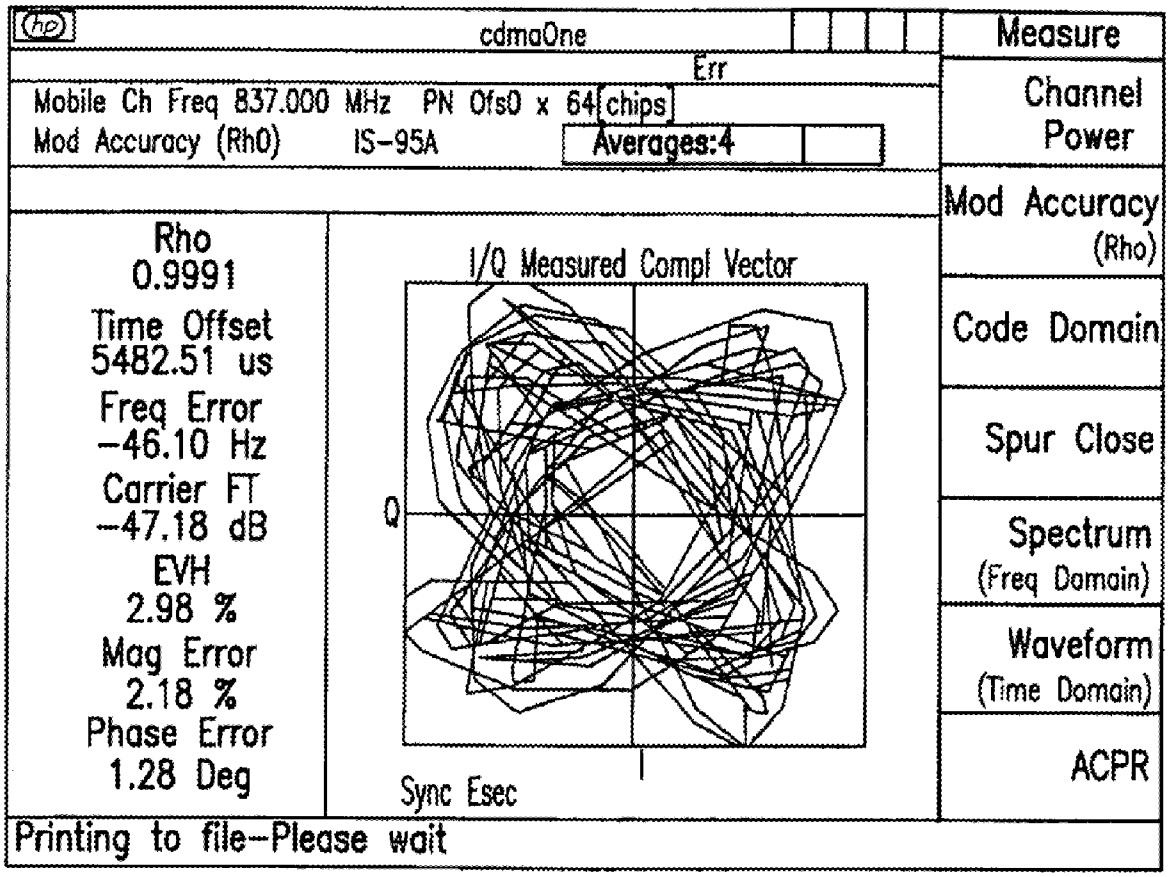4602



MOBILE CONSTELLATION USING ONLY H/P TEST EQUIPMENT

FIG. 47

4702


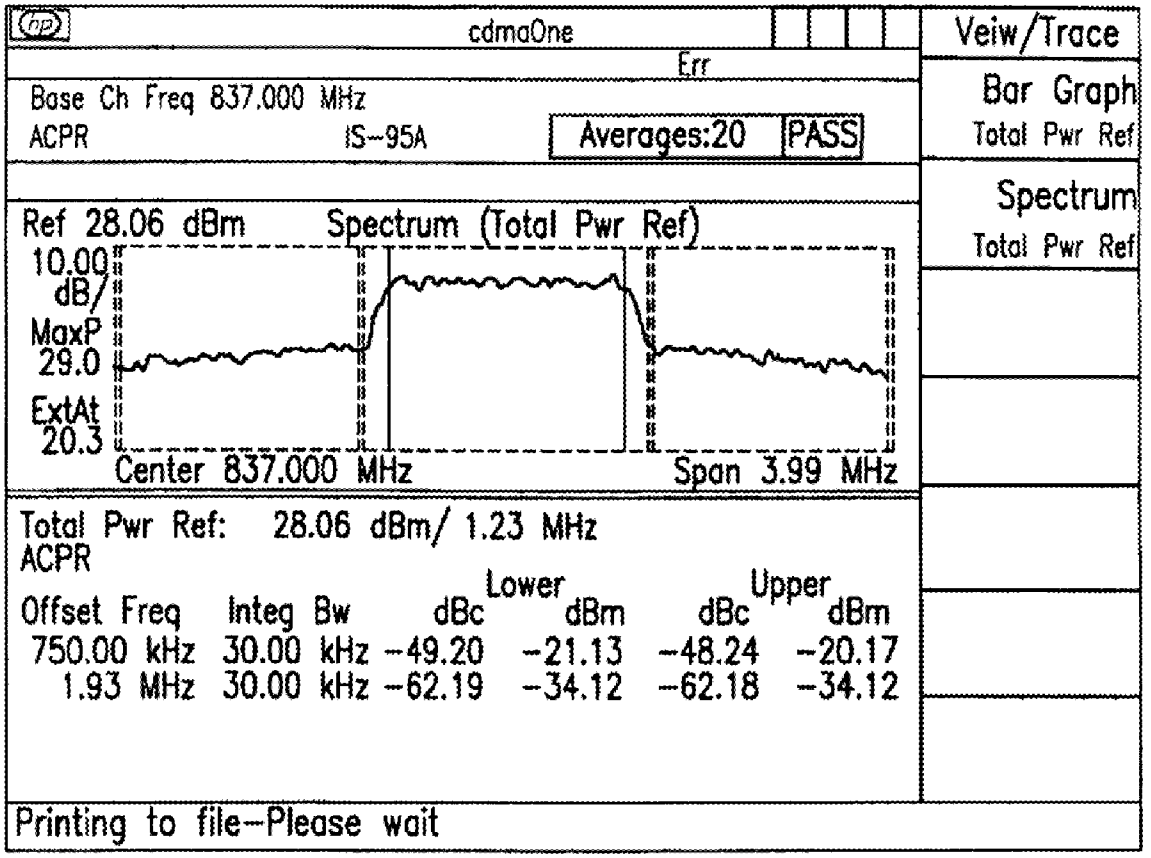

cdmaOne
Err
Veiw/Trace
Base Ch Freq 837.000 MHz
ACPR
IS-95A
Averages:20
PASS
Bar Graph
Total Pwr Ref
Spectrum
Total Pwr Ref
Ref 28.06 dBm
Spectrum (Total Pwr Ref)
10.00 dB/
MaxP 29.0
ExtAt 20.3
Center 837.000 MHz
Span 3.99 MHz
Total Pwr Ref: 28.06 dBm/ 1.23 MHz
ACPR
Lower
Upper
Offset Freq Integ Bw dBc dBm dBc dBm
750.00 kHz 30.00 kHz -49.20 -21.13 -48.24 -20.17
1.93 MHz 30.00 kHz -62.19 -34.12 -62.18 -34.12
Printing to file-Please wait
4802

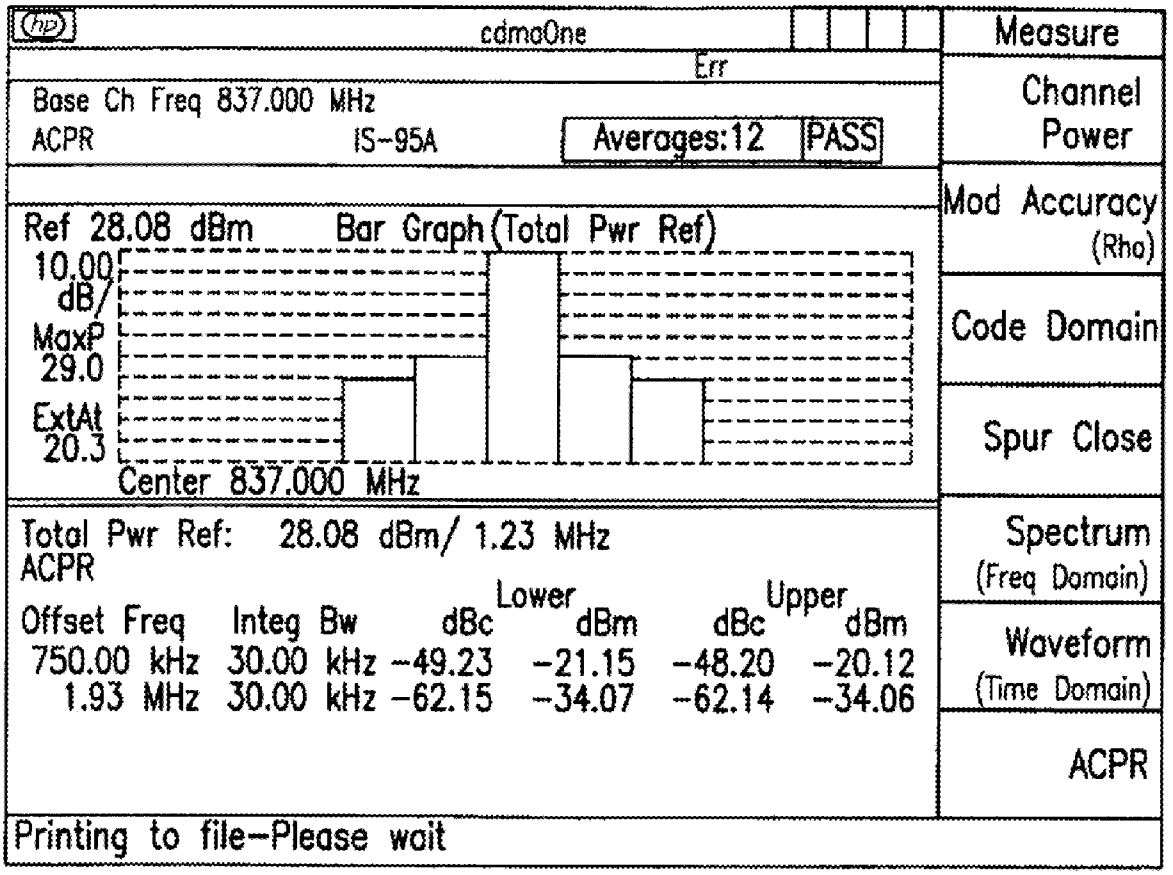FIG. 48



BASE STATION SPECTRAL RESPONSE WITH MASK

FIG.49

4902



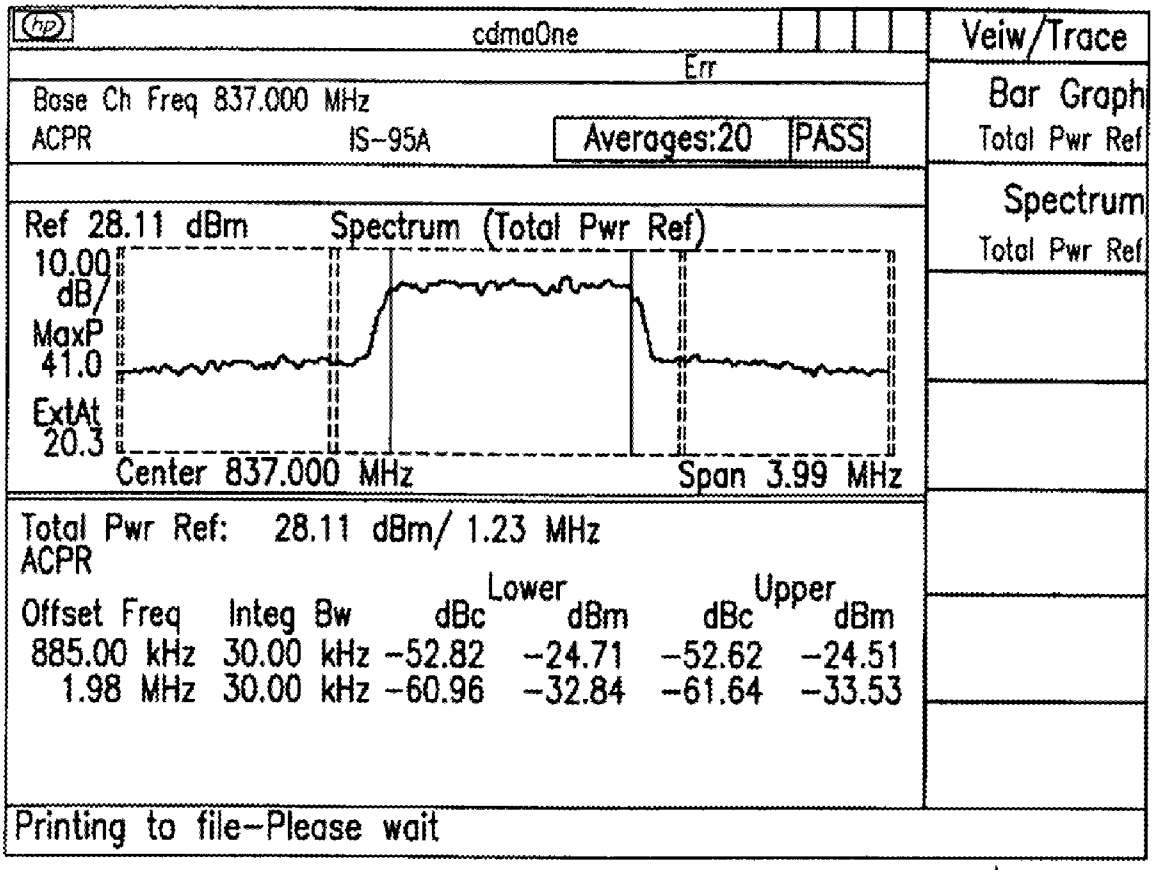

cdmaOne
Err
Veiw/Trace
Base Ch Freq 837.000 MHz
ACPR
IS-95A
Averages:20
PASS
Bar Graph
Total Pwr Ref
Spectrum
Total Pwr Ref
Ref 28.11 dBm
Spectrum (Total Pwr Ref)
10.00 dB/
MaxP 41.0
ExtAt 20.3
Center 837.000 MHz
Span 3.99 MHz
Total Pwr Ref: 28.11 dBm/ 1.23 MHz
ACPR
Lower
Upper
Offset Freq Integ Bw dBc dBm dBc dBm
885.00 kHz 30.00 kHz -52.82 -24.71 -52.62 -24.51
1.98 MHz 30.00 kHz -60.96 -32.84 -61.64 -33.53
Printing to file-Please wait
5002

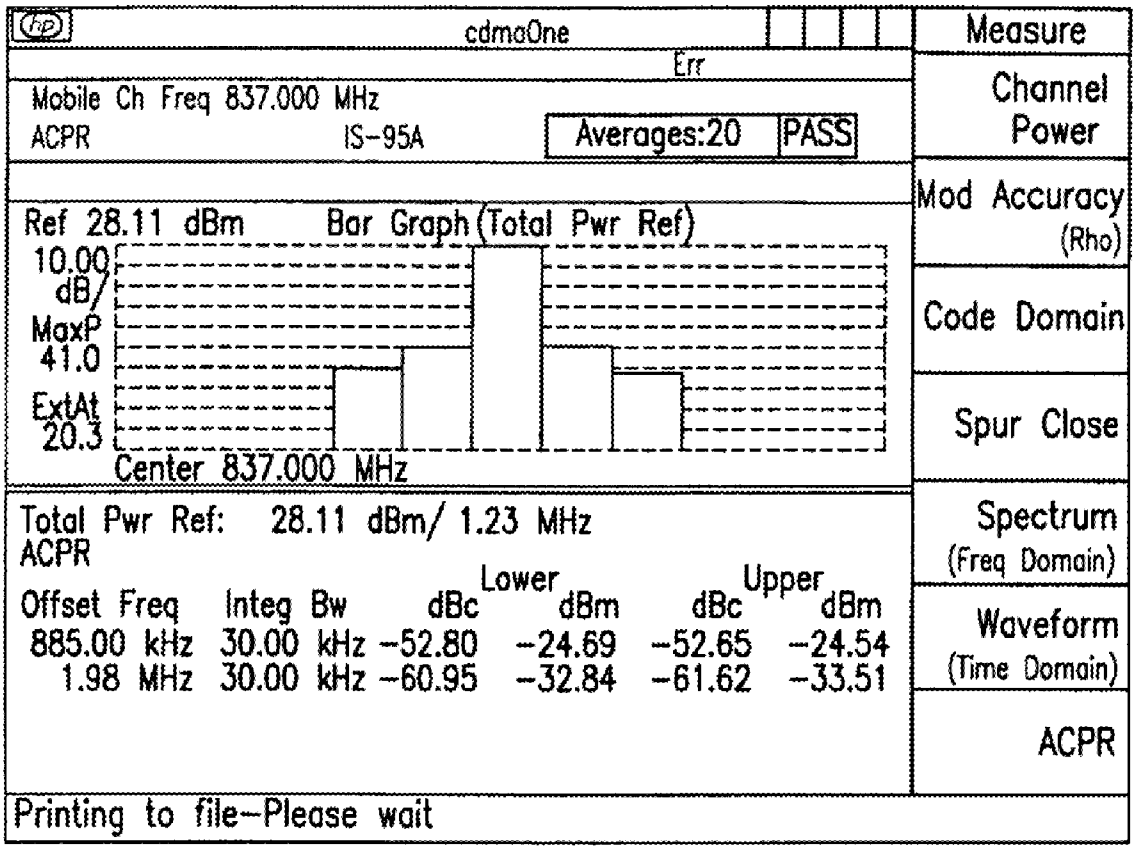FIG.50



MOBILE STATION SPECTRAL RESPONSE WITH MASK

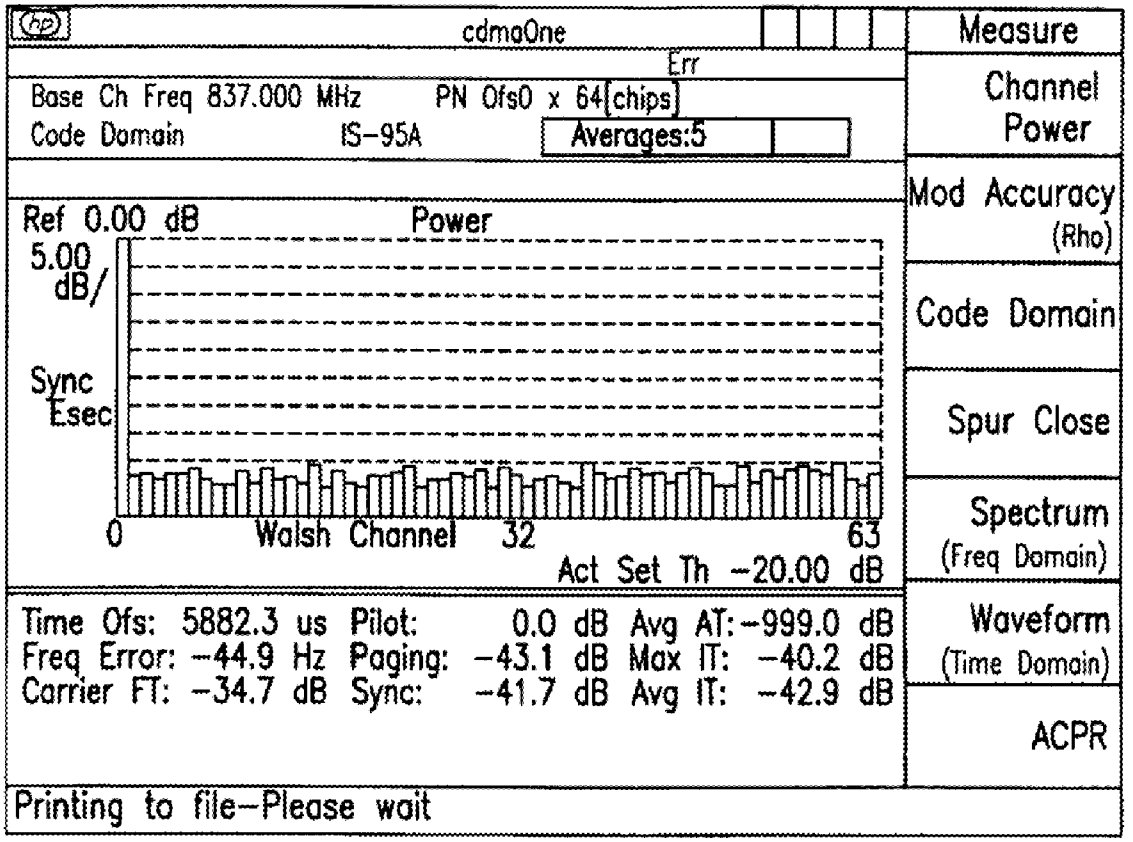FIG.51



CDMA CROSSTALK

FIG.52A

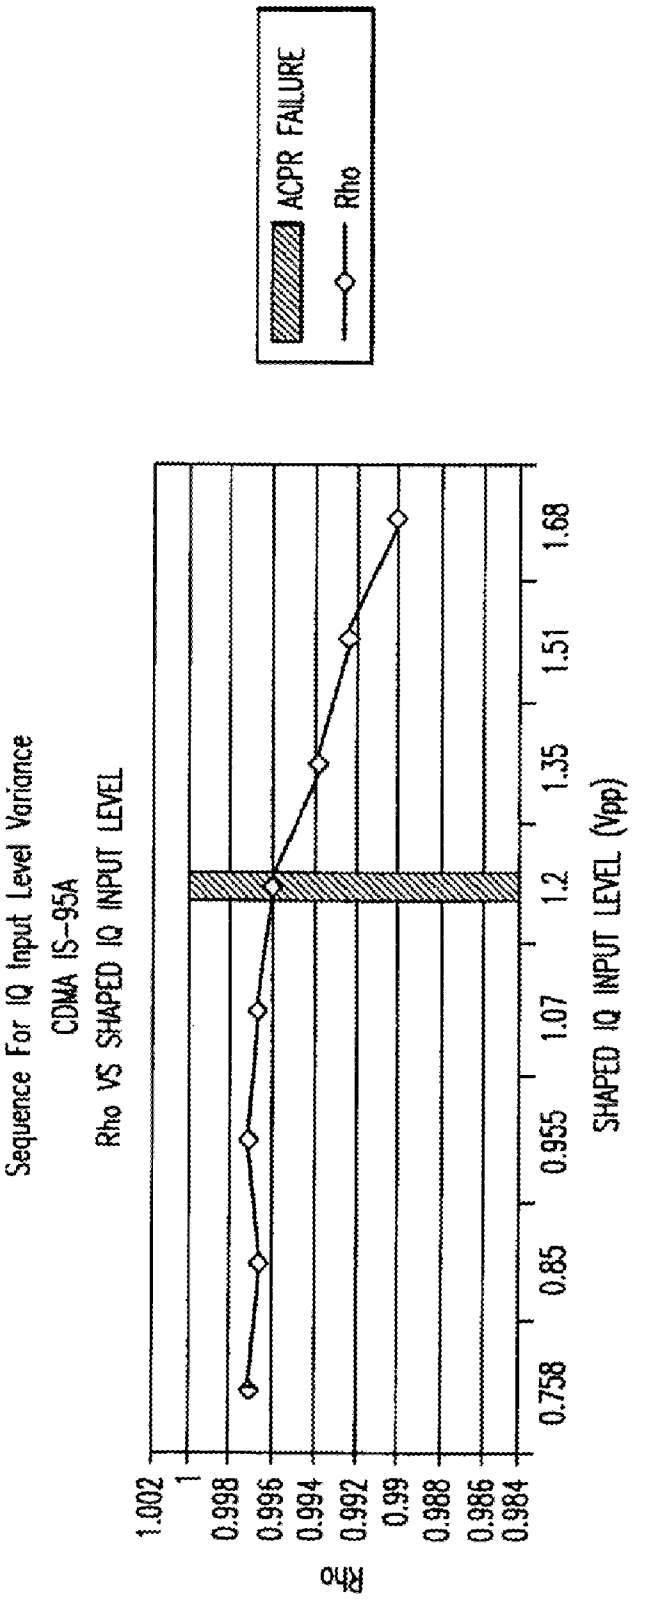

ACPR FAILURE
Rho
Sequence For IQ Input Level Variance
CDMA IS-95A
Rho VS SHAPED IQ INPUT LEVEL
Rho
1.002
1
0.998
0.996
0.994
0.992
0.99
0.988
0.986
0.984
0.758
0.85
0.955
1.07
1.2
1.35
1.51
1.68
SHAPED IQ INPUT LEVEL (Vpp)

FIG.52B

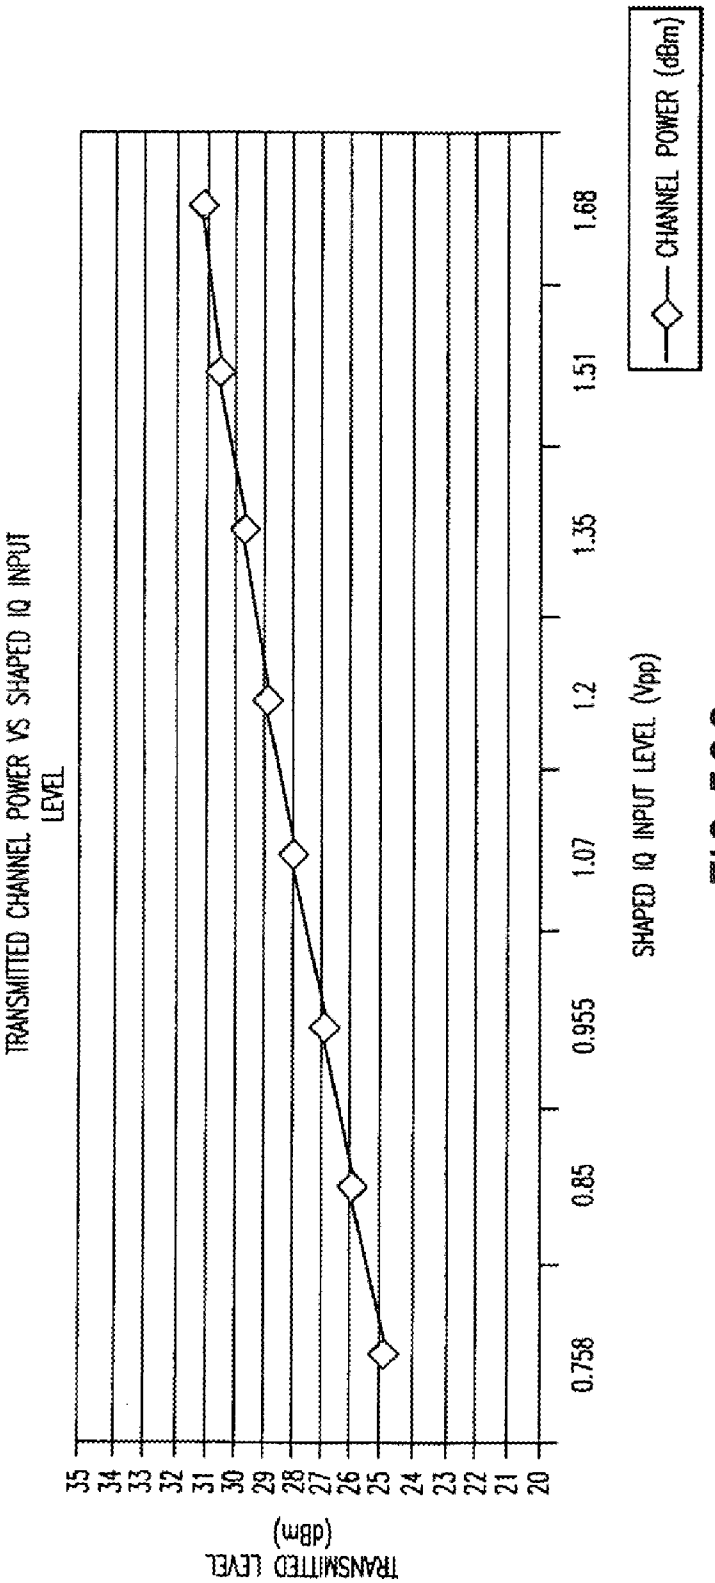

CDMA IS-95A
TRANSMITTED CHANNEL POWER VS SHAPED IQ INPUT LEVEL
TRANSMITTED LEVEL (dBm)
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
0.758
0.85
0.955
1.07
1.2
1.35
1.51
1.68
SHAPED IQ INPUT LEVEL (Vpp)
CHANNEL POWER (dBm)

FIG.52C

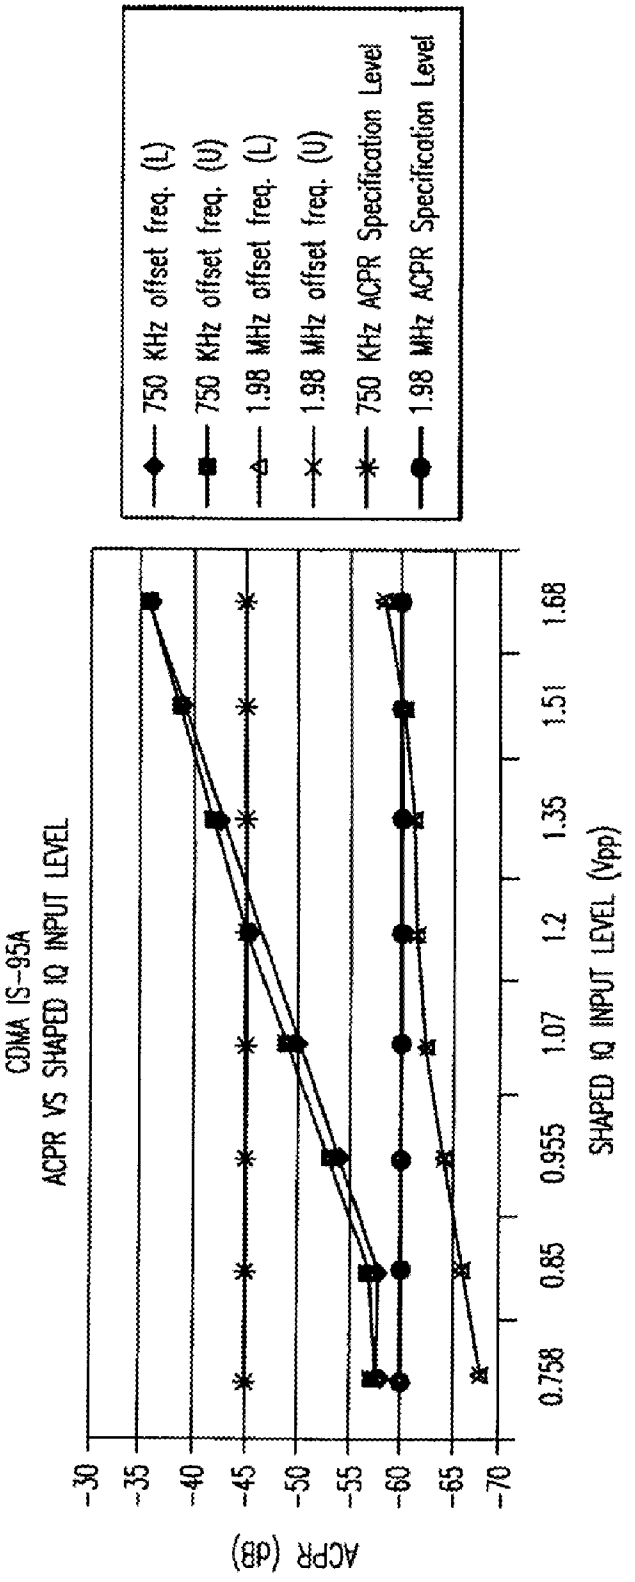

750 KHz offset freq. (L)
750 KHz offset freq. (U)
1.98 MHz offset freq. (L)
1.98 MHz offset freq. (U)
750 KHz ACPR Specification Level
1.98 MHz ACPR Specification Level
CDMA IS-95A
ACPR VS SHAPED IQ INPUT LEVEL
ACPR (dB)
-30
-35
-40
-45
-50
-55
-60
-65
-70
0.758
0.85
0.955
1.07
1.2
1.35
1.51
1.68
SHAPED IQ INPUT LEVEL (Vpp)

FIG.52D

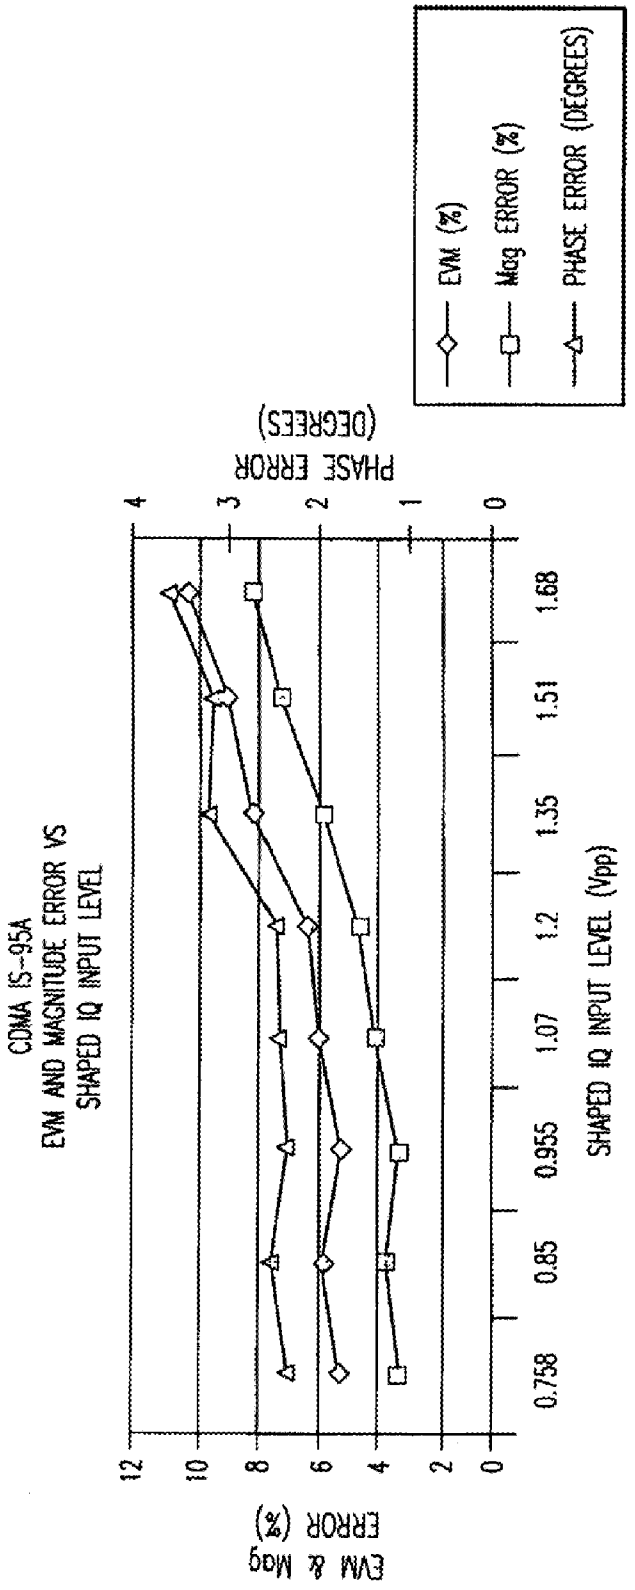

CDMA IS-95A
EVM AND MAGNITUDE ERROR VS
SHAPED IQ INPUT LEVEL
EVM & Mag ERROR (%)
PHASE ERROR (DEGREES)
SHAPED IQ INPUT LEVEL (Vpp)
0.758
0.85
0.955
1.07
1.2
1.35
1.51
1.68
0
2
4
6
8
10
12
0
1
2
3
4
EVM (%)
Mag ERROR (%)
PHASE ERROR (DEGREES)

FIG.52E

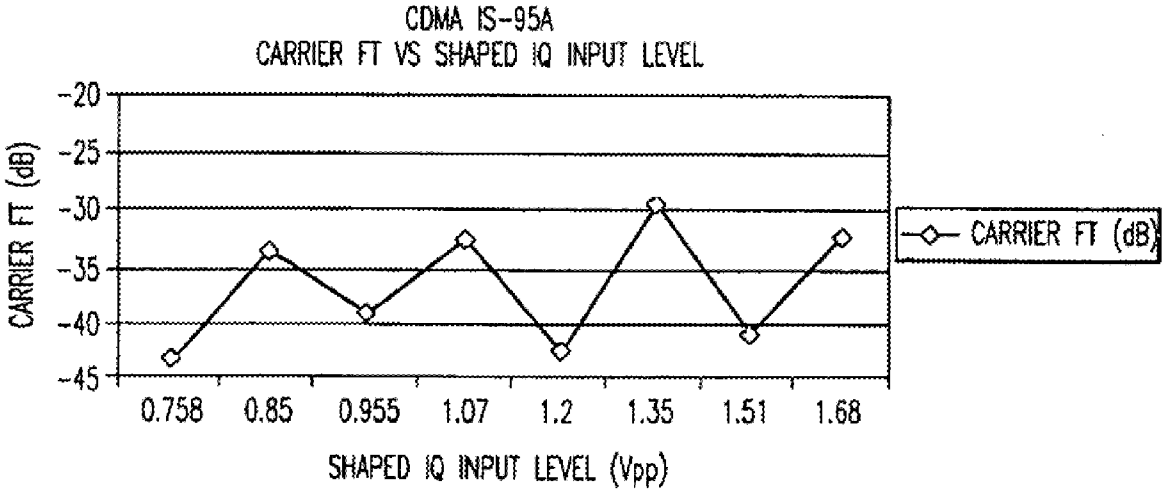


FIG.52F

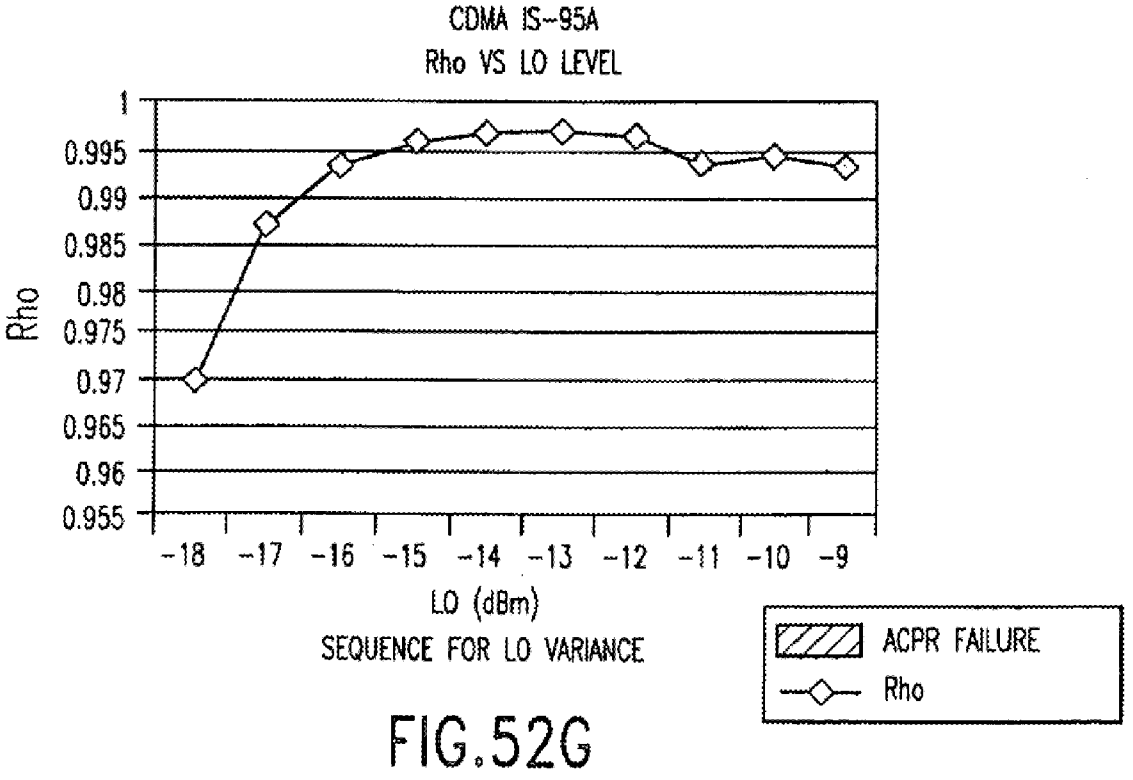


FIG.52G

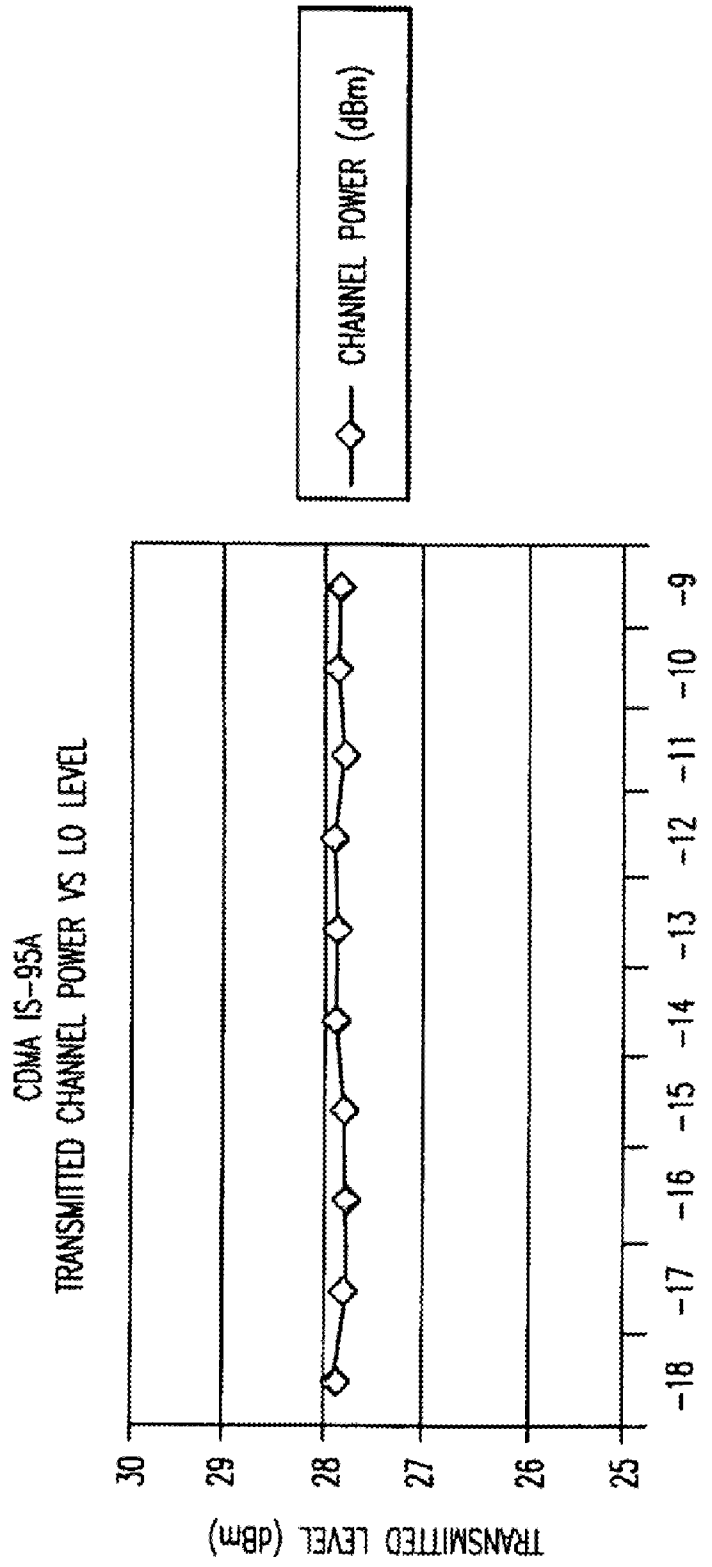

CHANNEL POWER (dBm)
CDMA IS-95A
TRANSMITTED CHANNEL POWER VS LO LEVEL
TRANSMITTED LEVEL (dBm)
30
29
28
27
26
25
-18
-17
-16
-15
-14
-13
-12
-11
-10
-9
LO (dBm)

FIG.52H

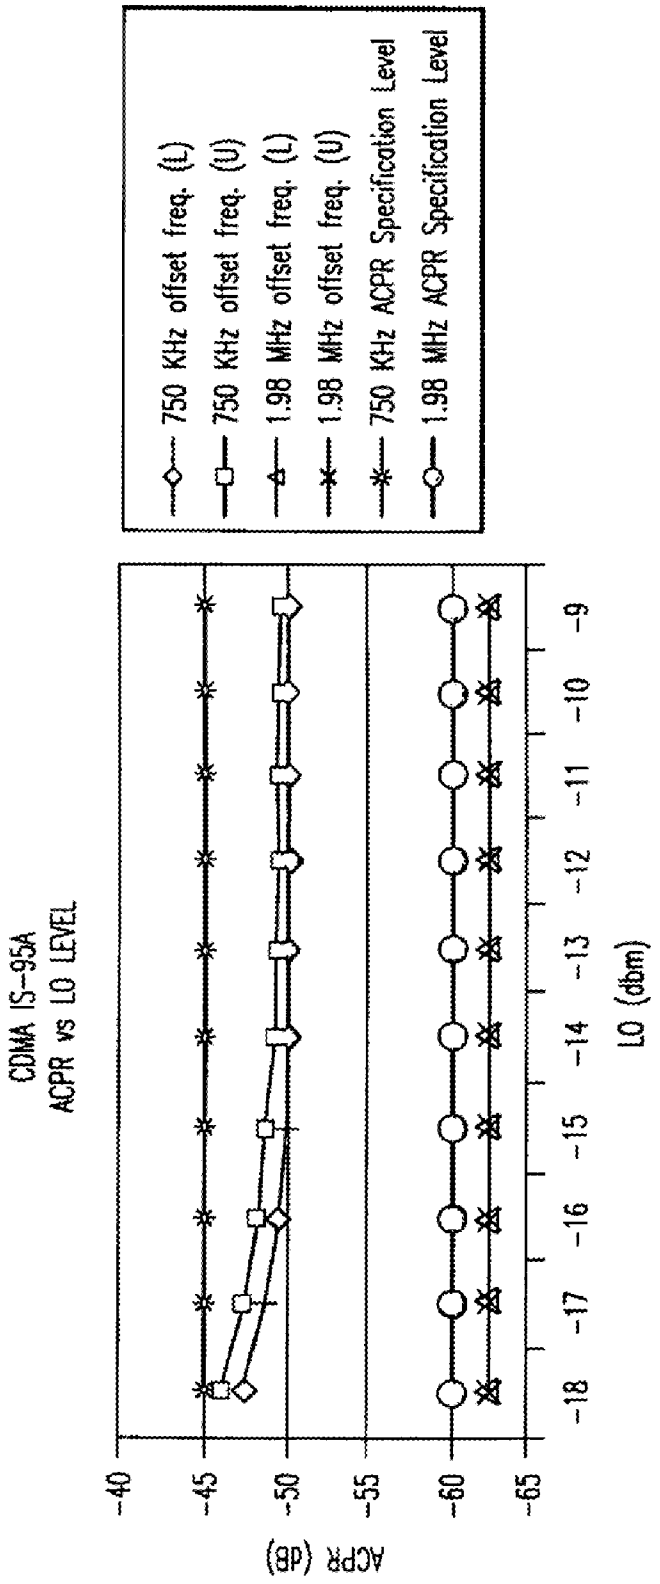

CDMA IS-95A
ACPR vs LO LEVEL
750 KHz offset freq. (L)
750 KHz offset freq. (U)
1.98 MHz offset freq. (L)
1.98 MHz offset freq. (U)
750 KHz ACPR Specification Level
1.98 MHz ACPR Specification Level
ACPR (dB)
-40
-45
-50
-55
-60
-65
-18
-17
-16
-15
-14
-13
-12
-11
-10
-9
LO (dbm)

FIG.52I

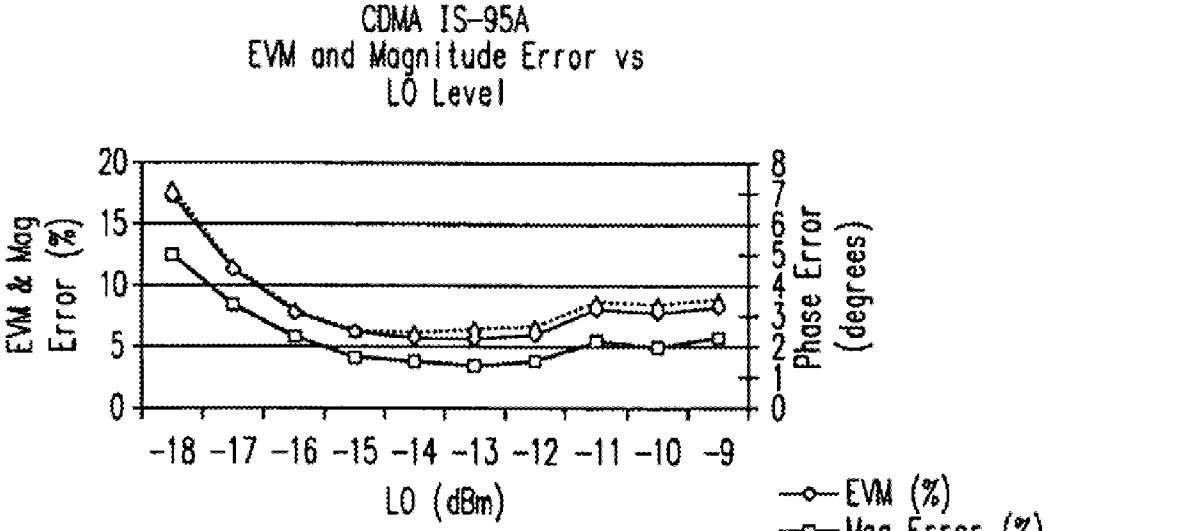


FIG.52J

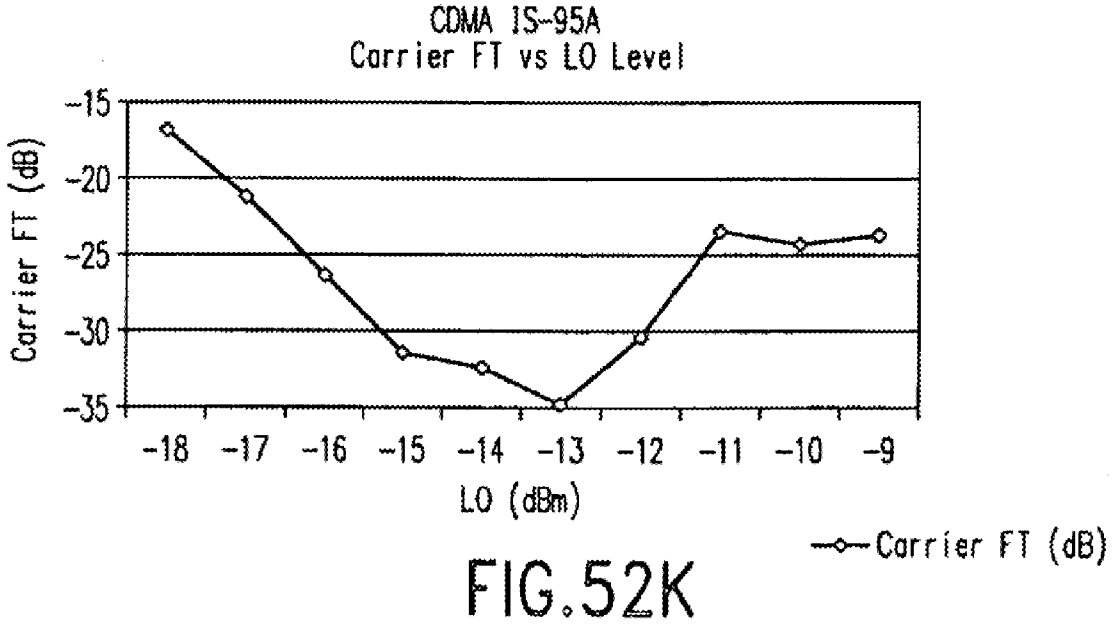


FIG.52K

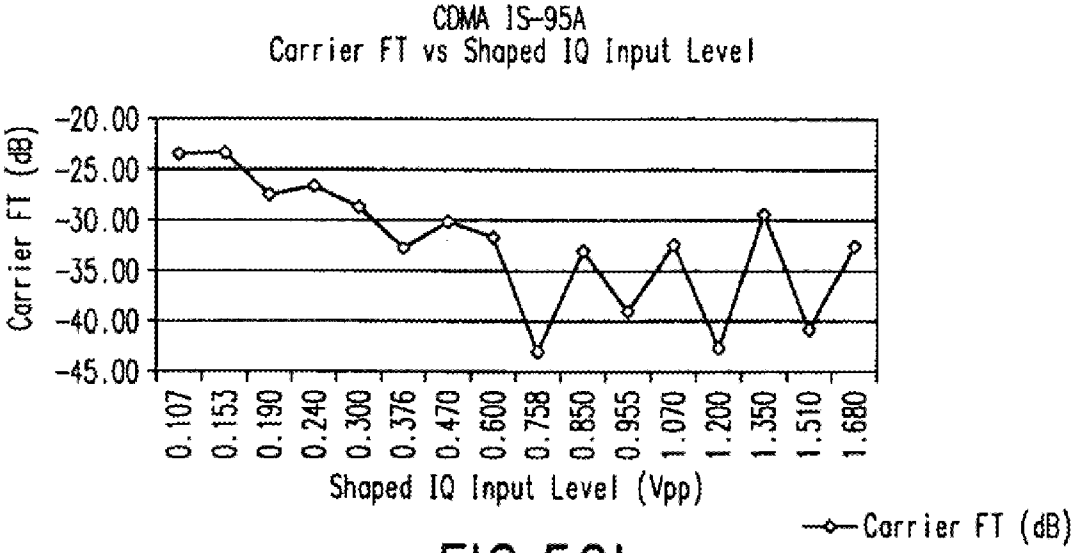


FIG.52L

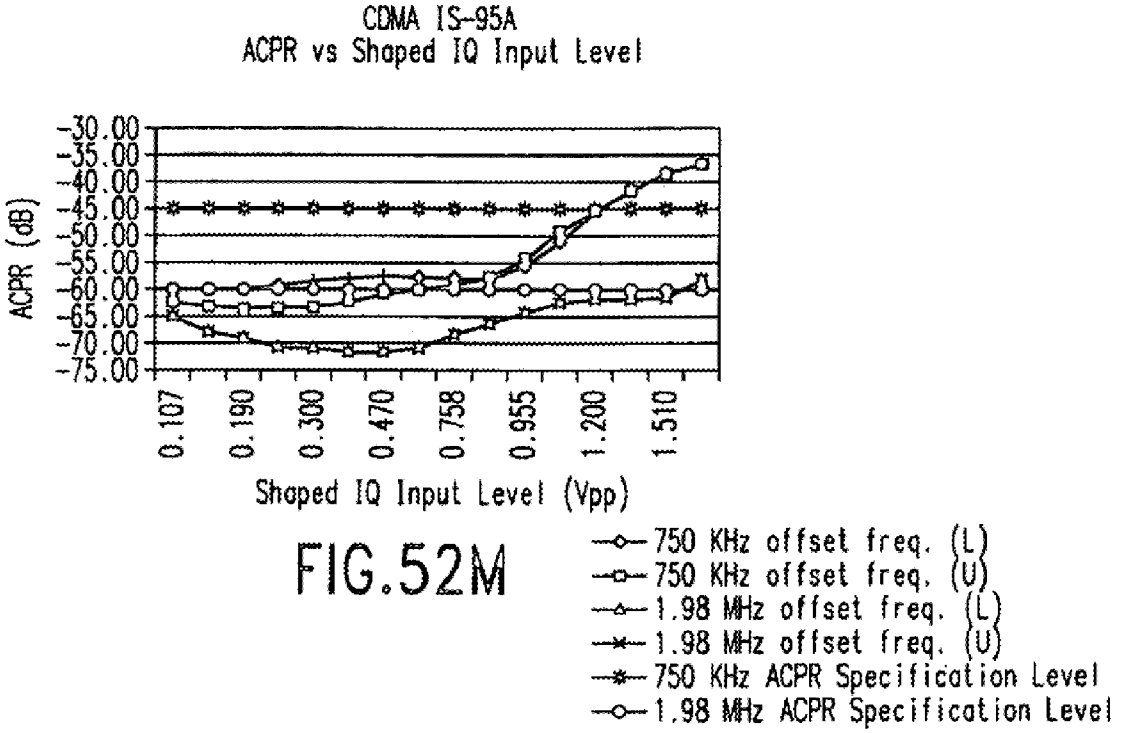


FIG.52M

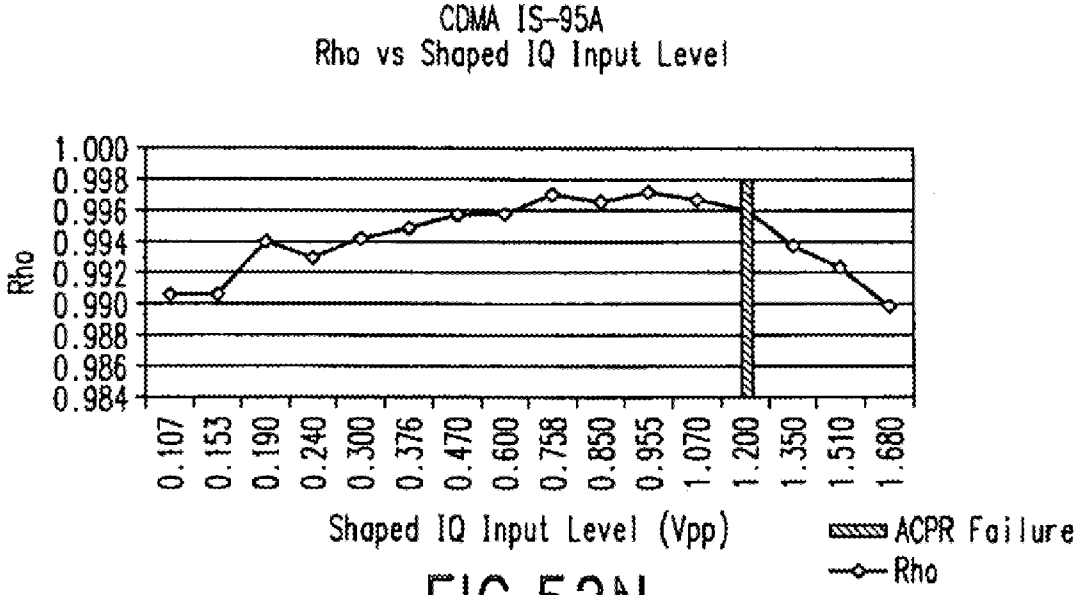


FIG.52N

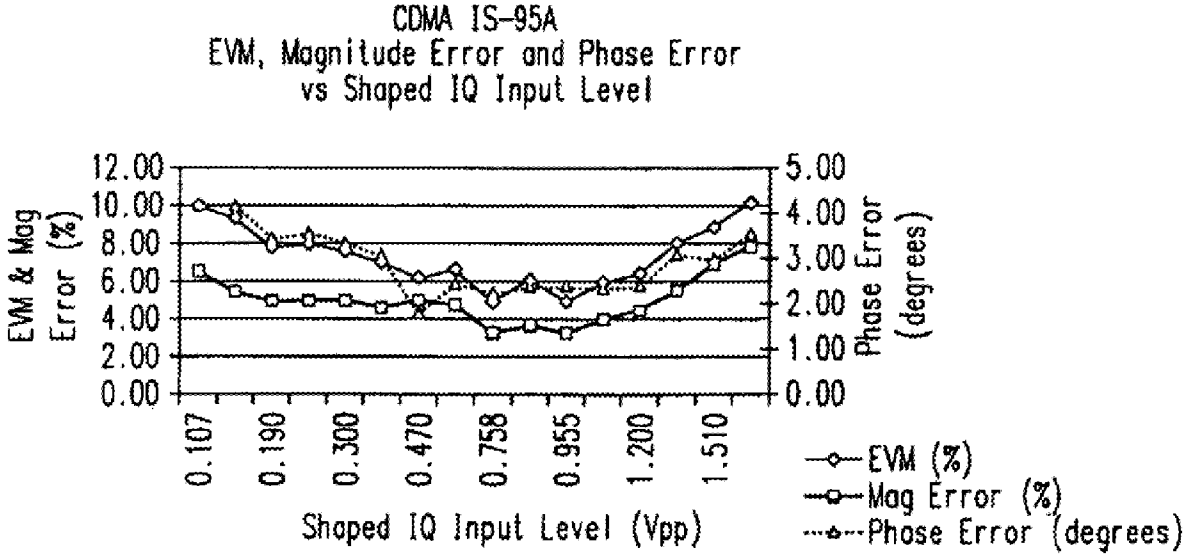


FIG.520

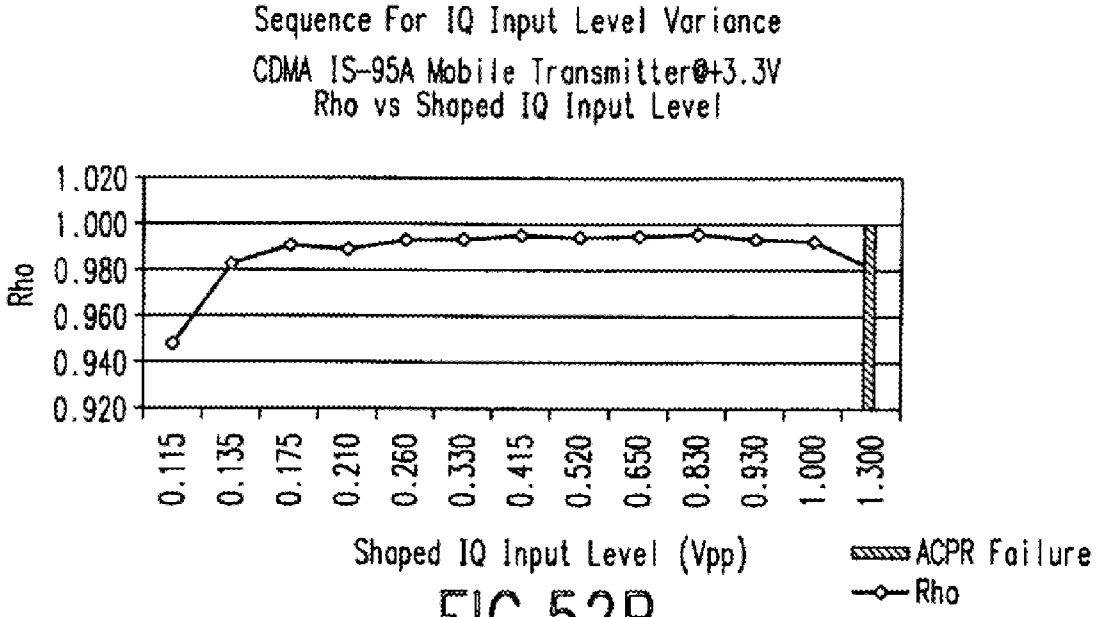


FIG.52P

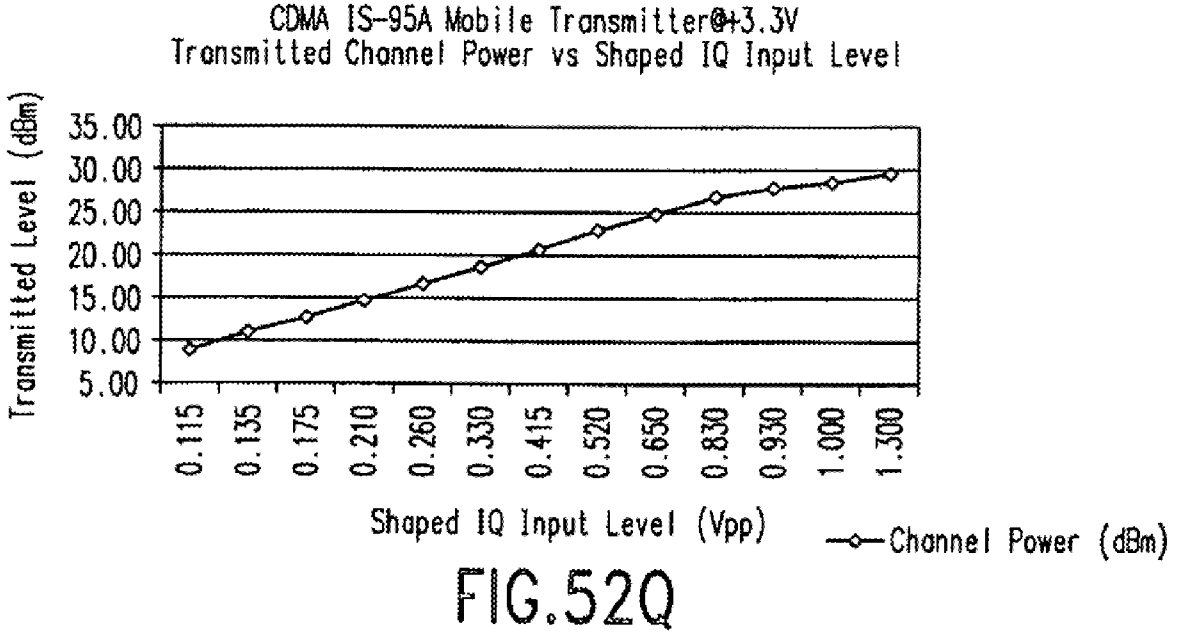


FIG.52Q

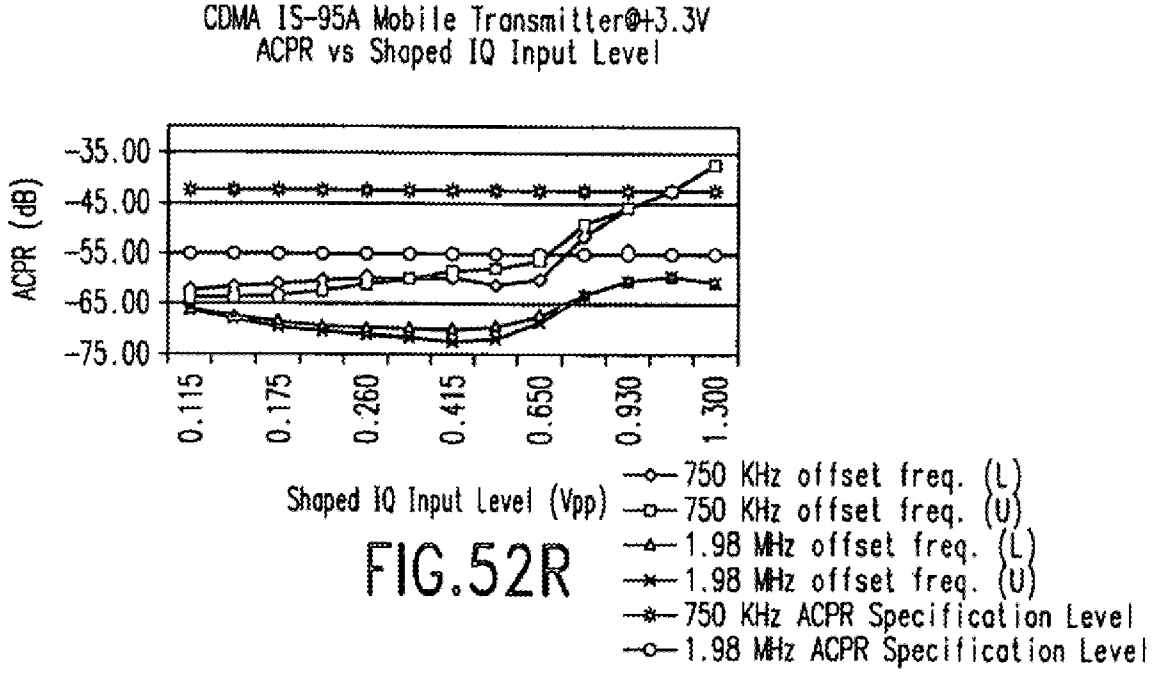


FIG.52R

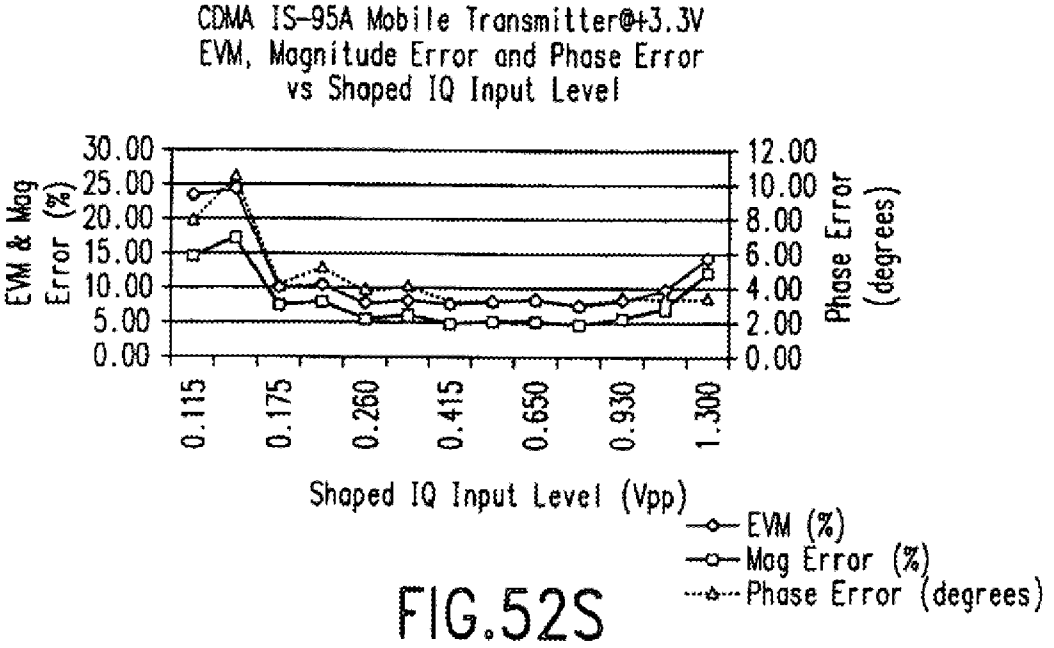


FIG.52S

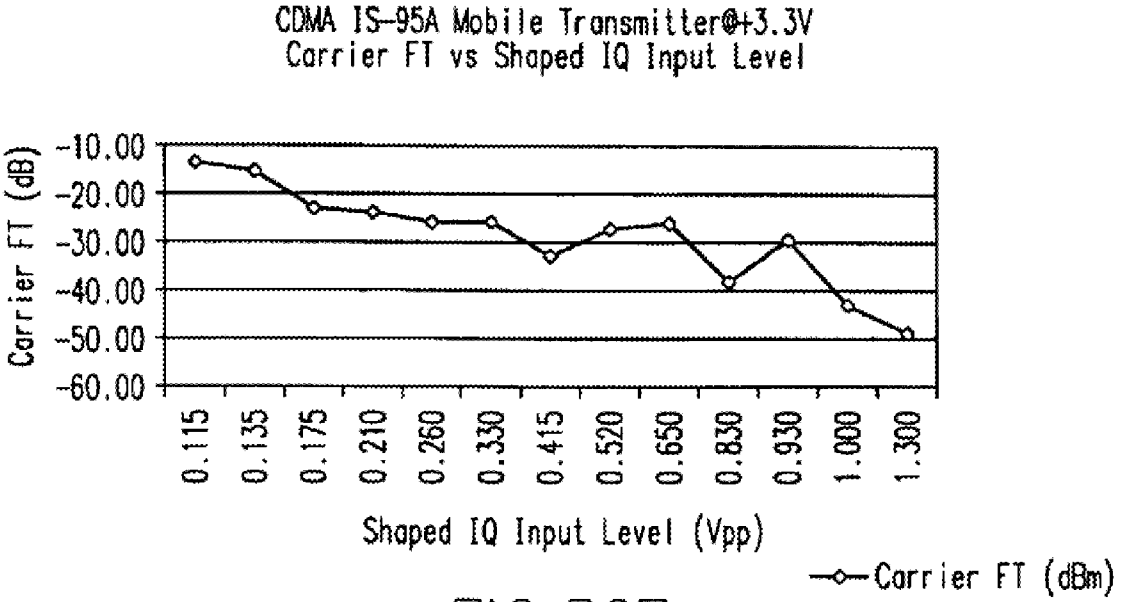


FIG.52T

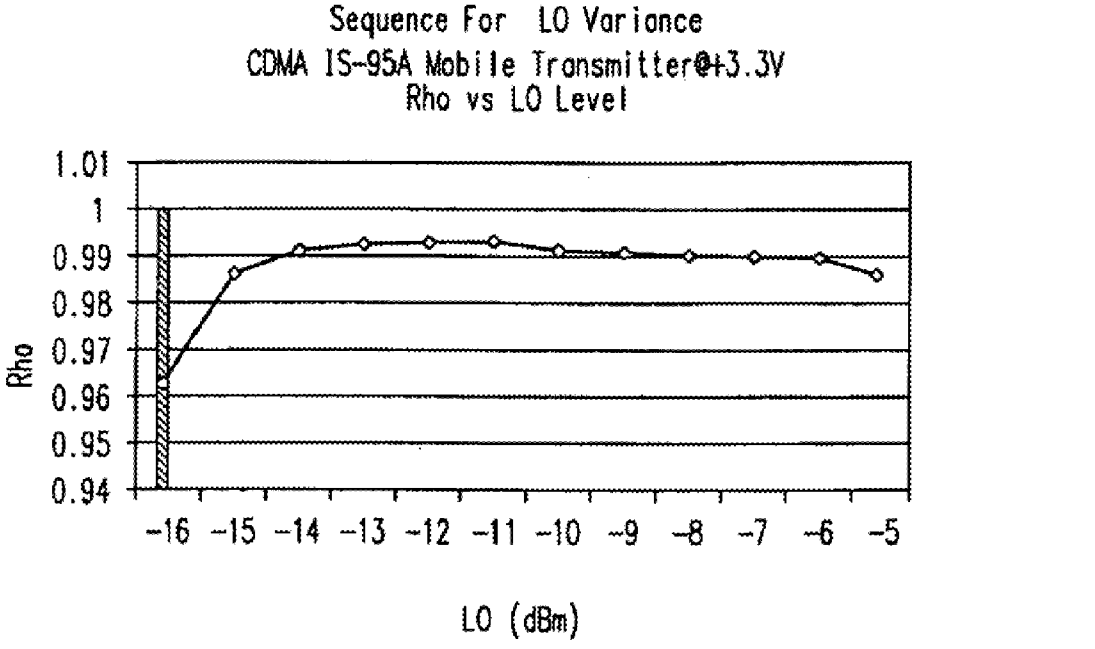


FIG.52U

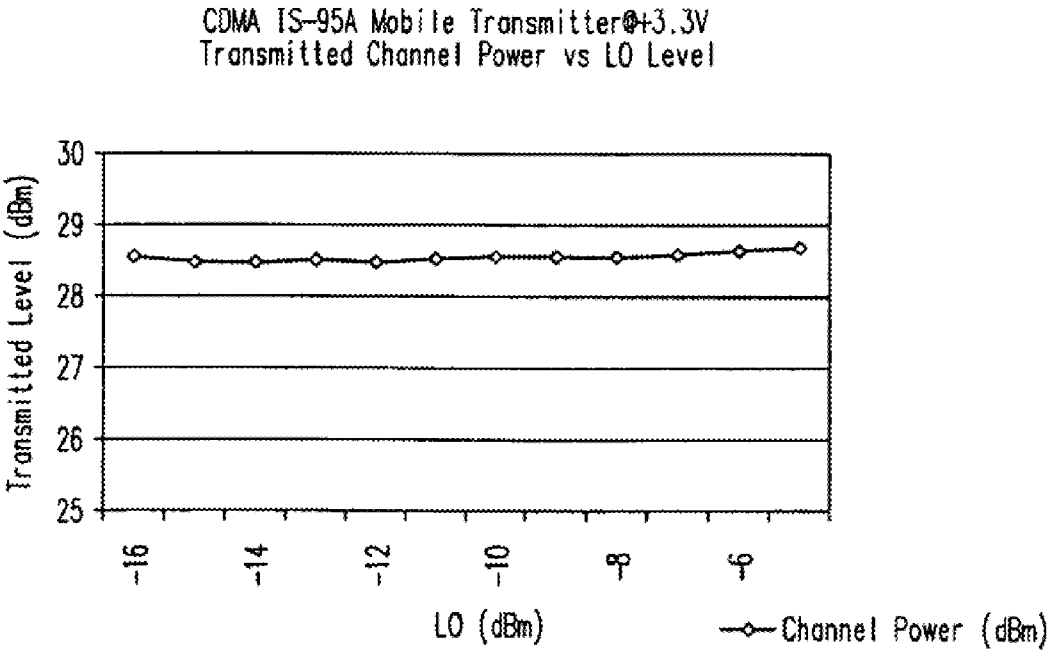


FIG.52V

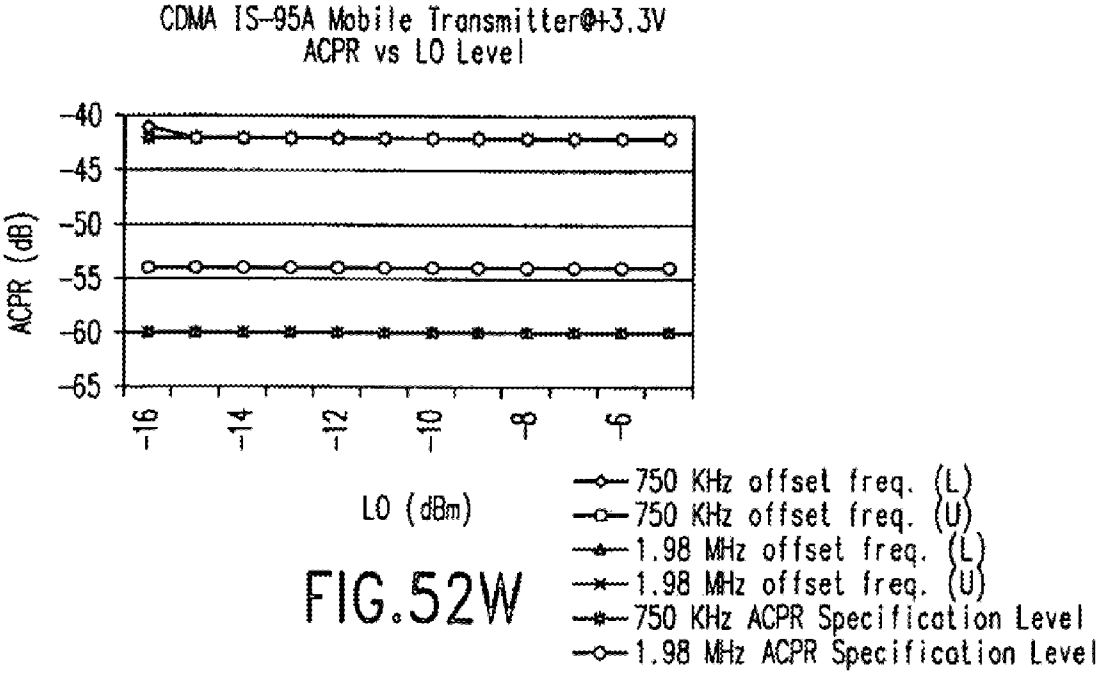


FIG.52W

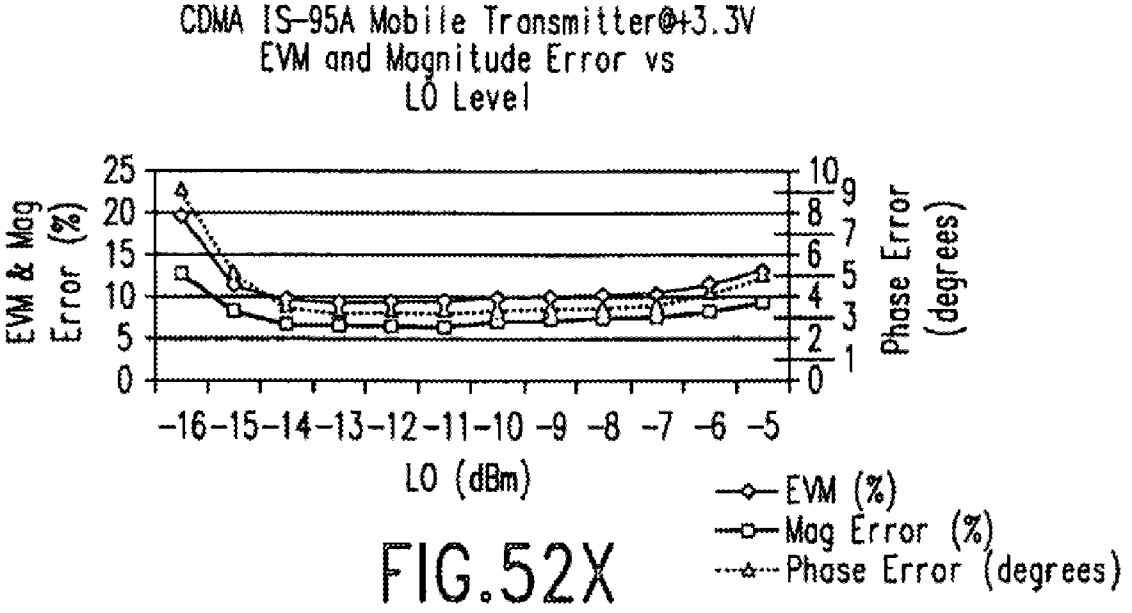


FIG.52X

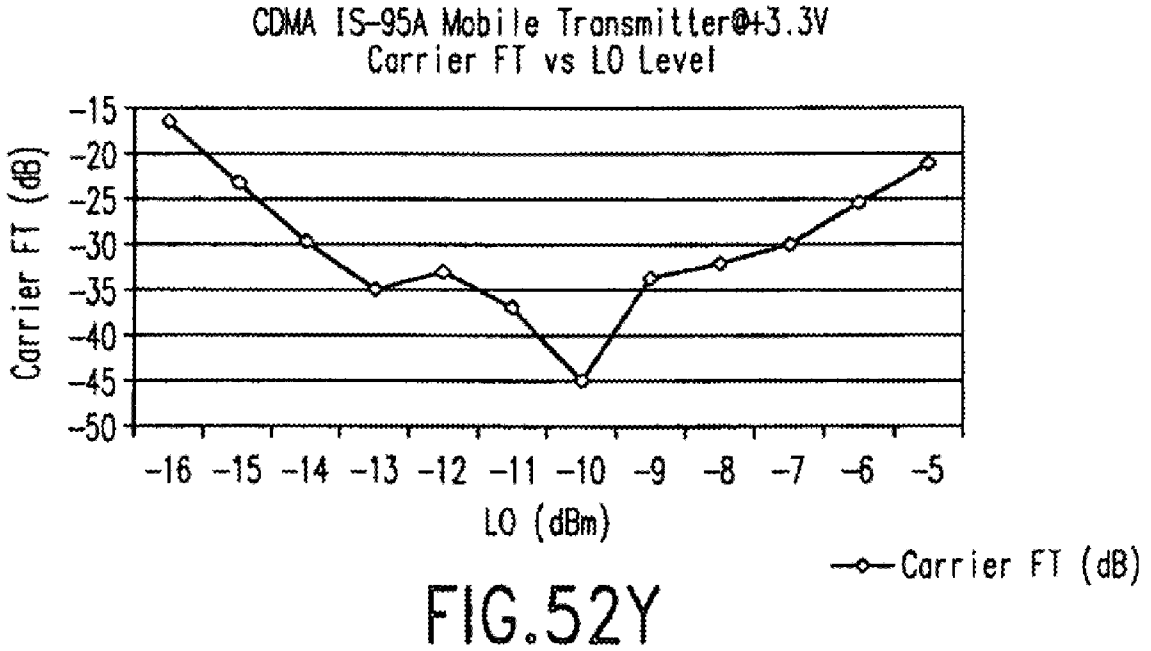


FIG.52Y

QUANTITY	DESCRIPTION	VOLTAGE	TOTAL CURRENT	POWER
2	CORES	3.3	4mA	13.2mW
2	BASEBAND INTERFACE CIRCUITS WITH/BW LIMIT	3.3	6mA	21.8mW
1	CLOCK CIRCUIT	3.3	5mA	20.0mW
			SUB TOTAL	54.0mW

FIG.52Z

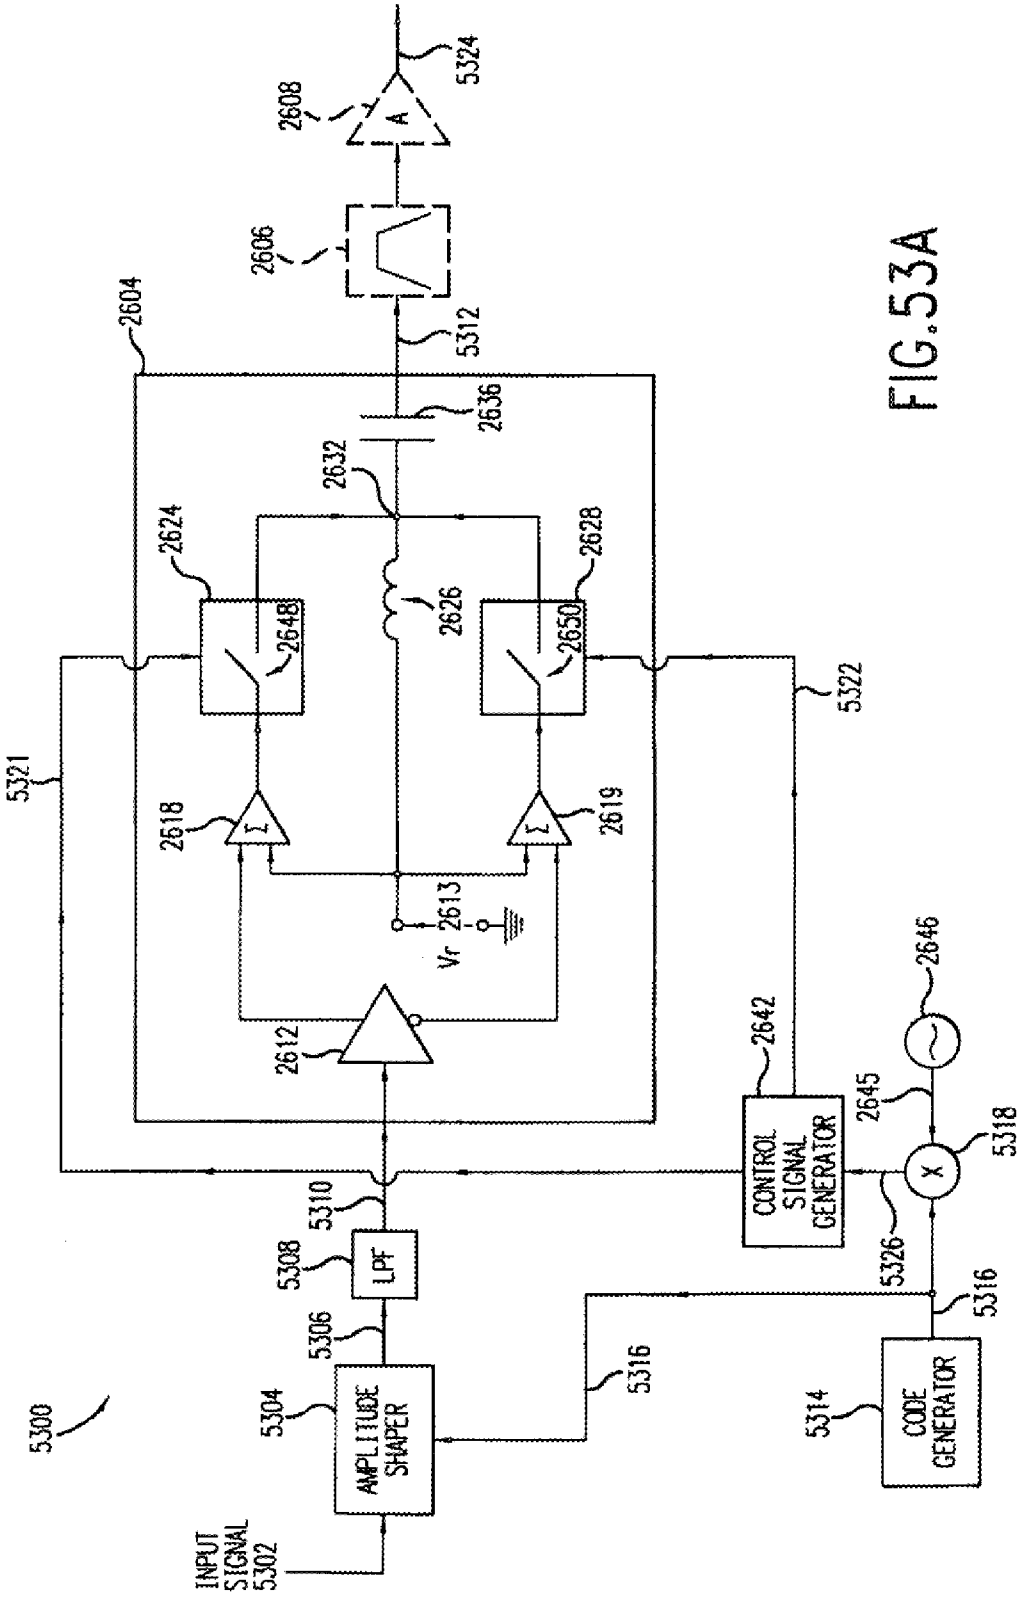

5300
INPUT SIGNAL 5302
AMPLITUDE SHAPER
5304
5306
LPF
5308
5310
5316
CODE GENERATOR
5314
CONTROL SIGNAL GENERATOR
2642
2646
2645
X
5318
5326
5316
2604
2606
2608
A
5324
5312
2636
2632
2624
2626
2628
2648
2650
5322
5321
2618
2619
Σ
Vr
2613
2612

FIG.53A

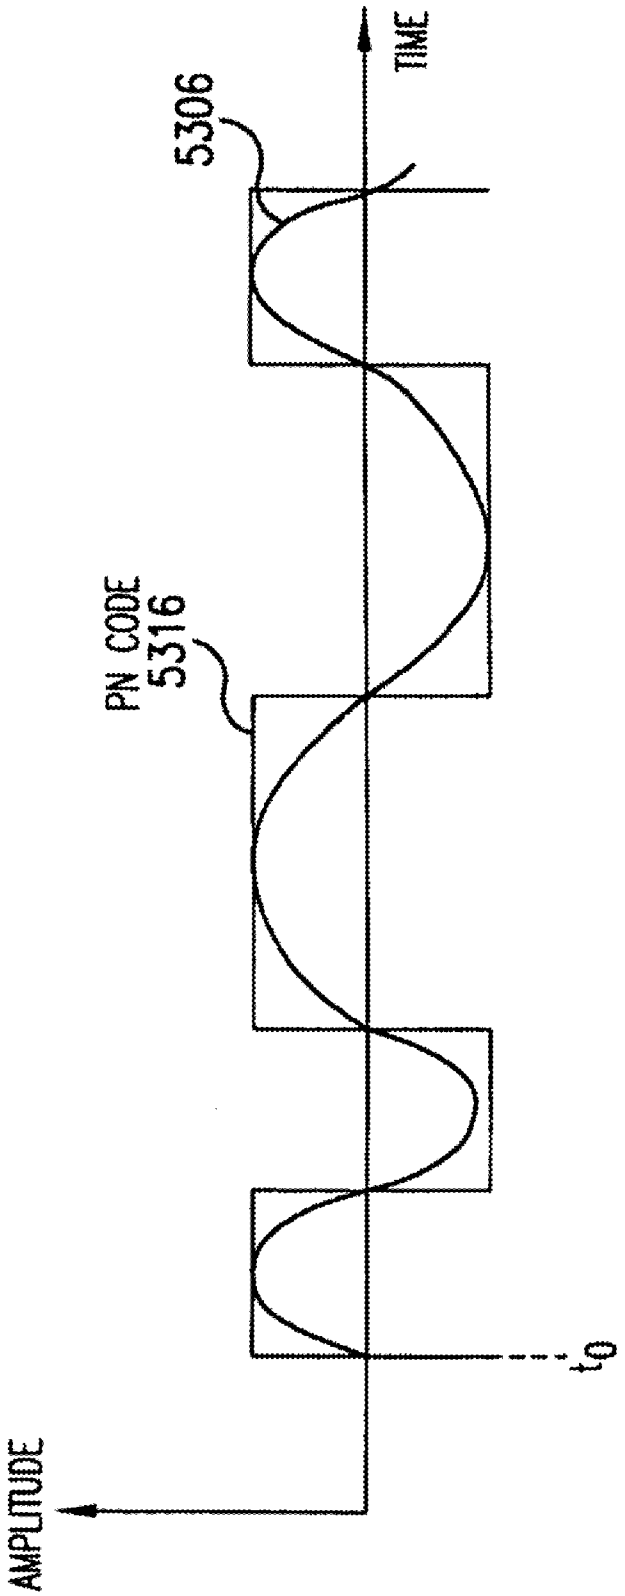


FIG.53B

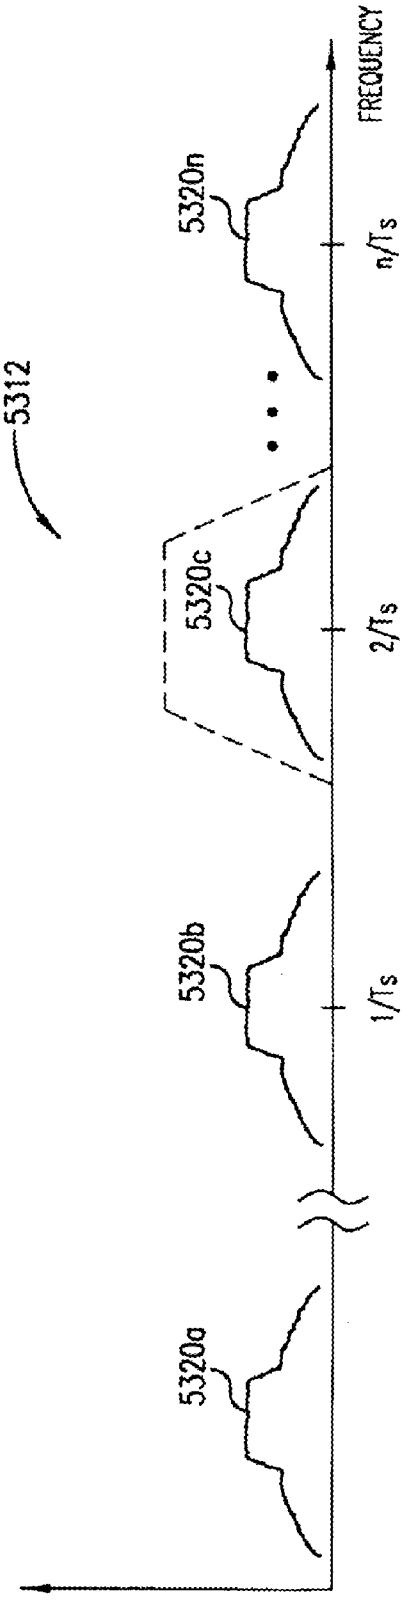


FIG.53C

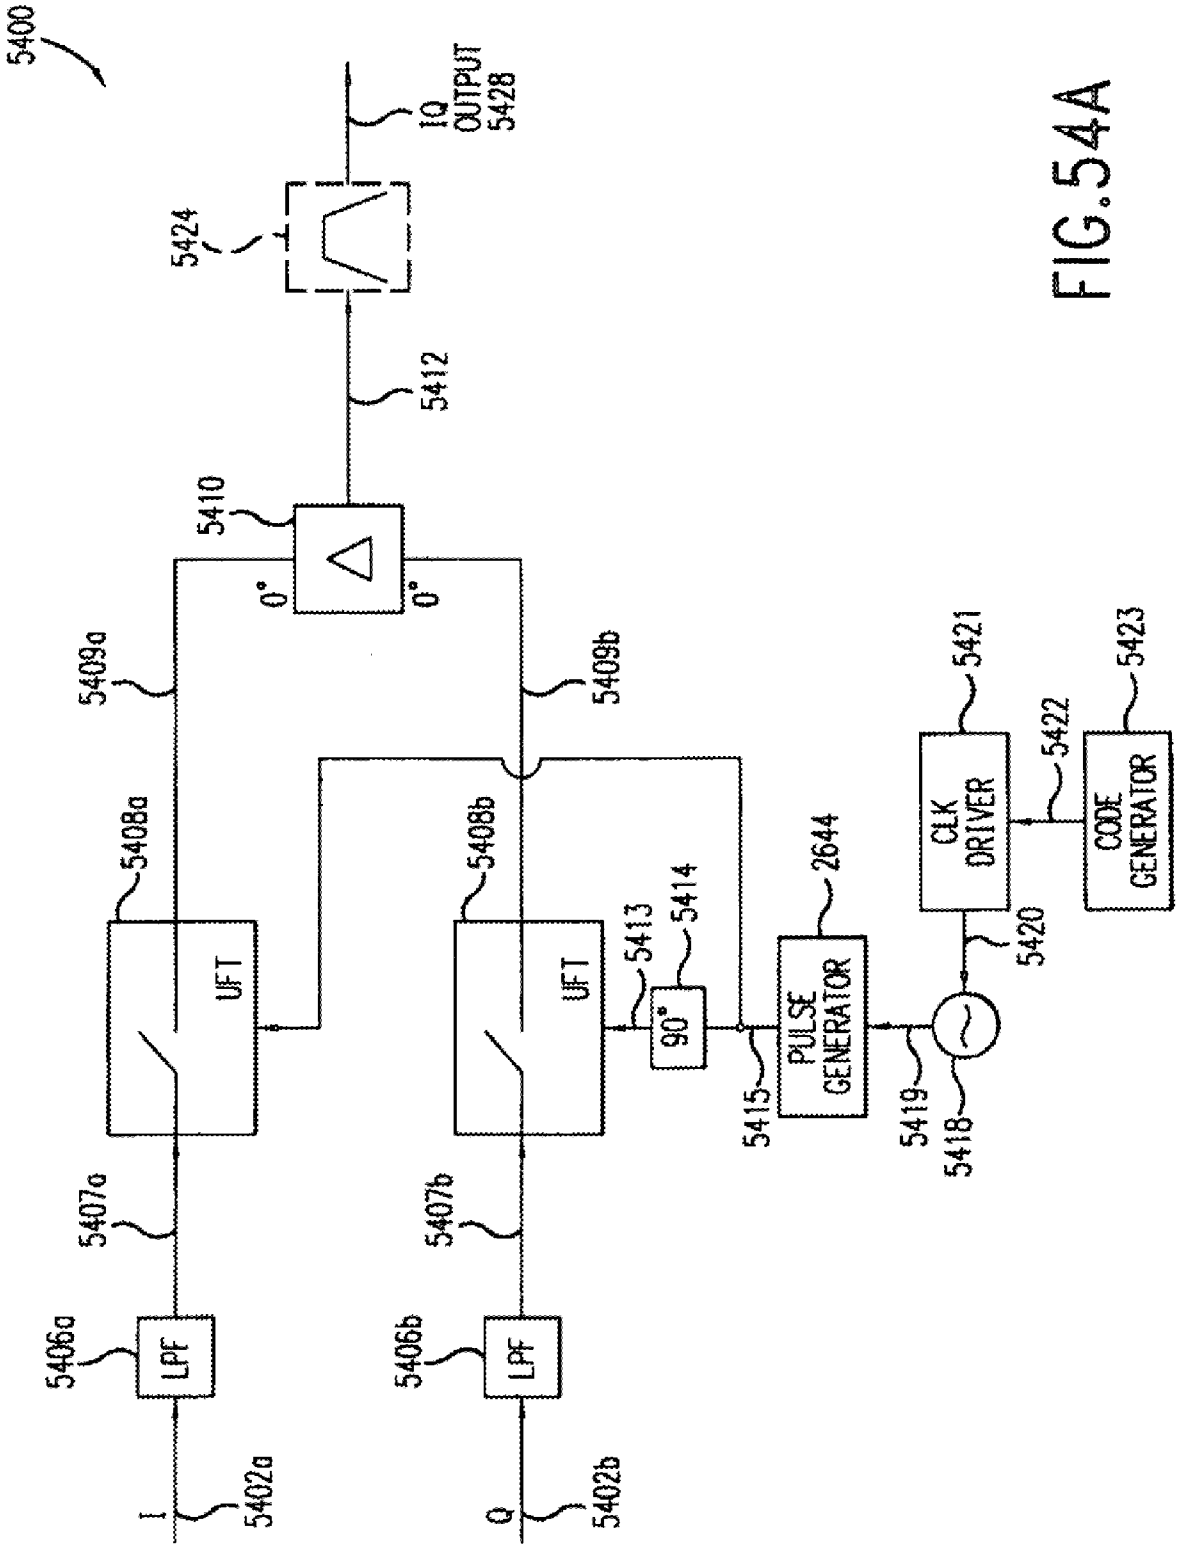

5400
IQ OUTPUT 5428
5424
5412
5410
0°
0°
5409a
5409b
5408a
5408b
UFT
UFT
5413
5414
90°
2644
PULSE GENERATOR
CLK DRIVER
5421
5422
CODE GENERATOR
5423
5420
5419
5418
5415
5407a
5407b
5406a
5406b
LPF
LPF
I
Q
5402a
5402b

FIG.54A

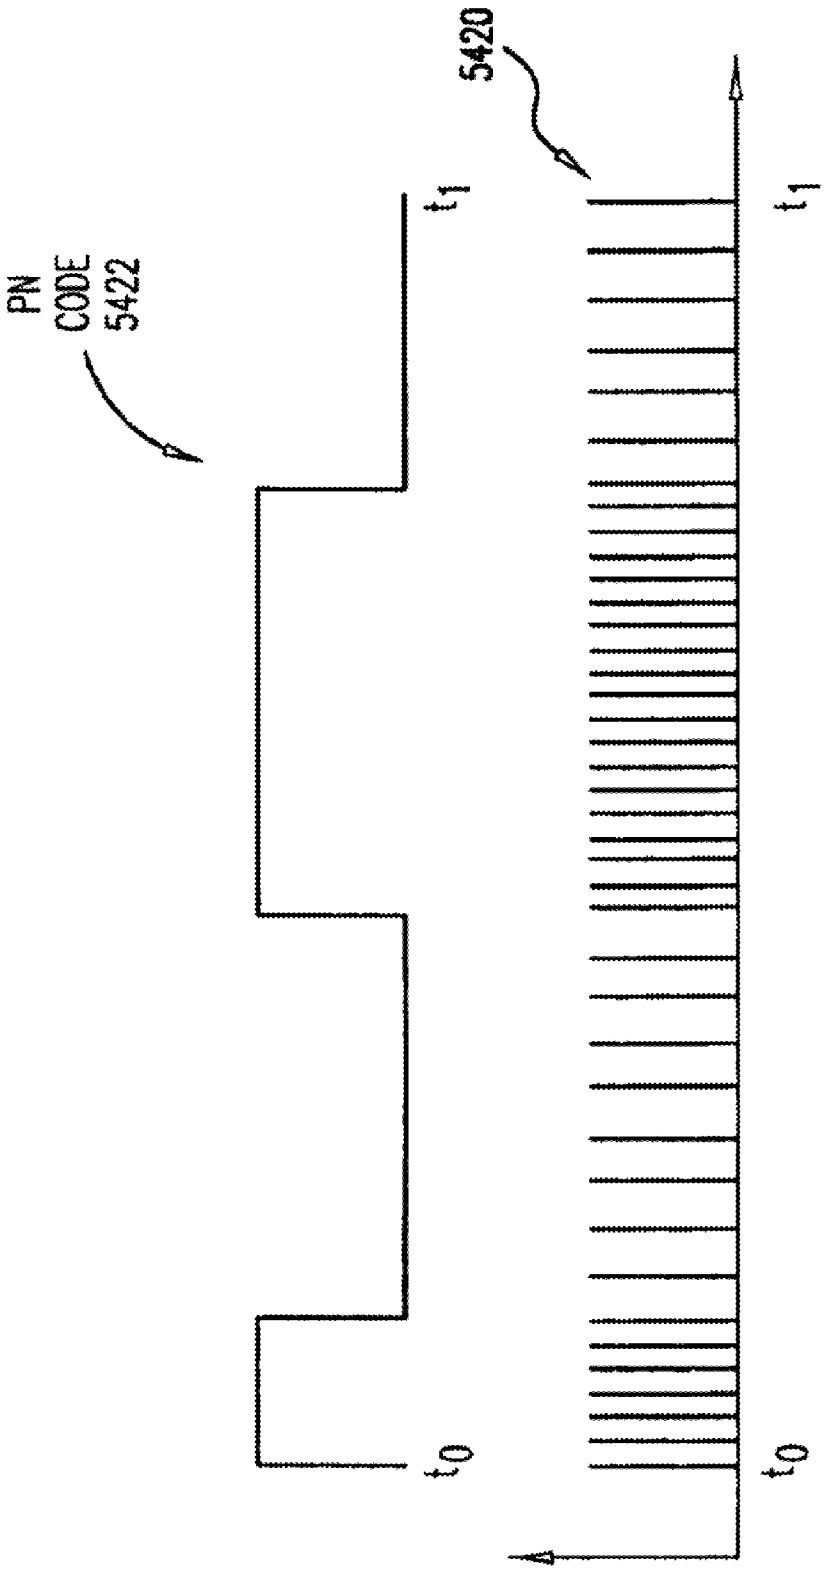


FIG.54B

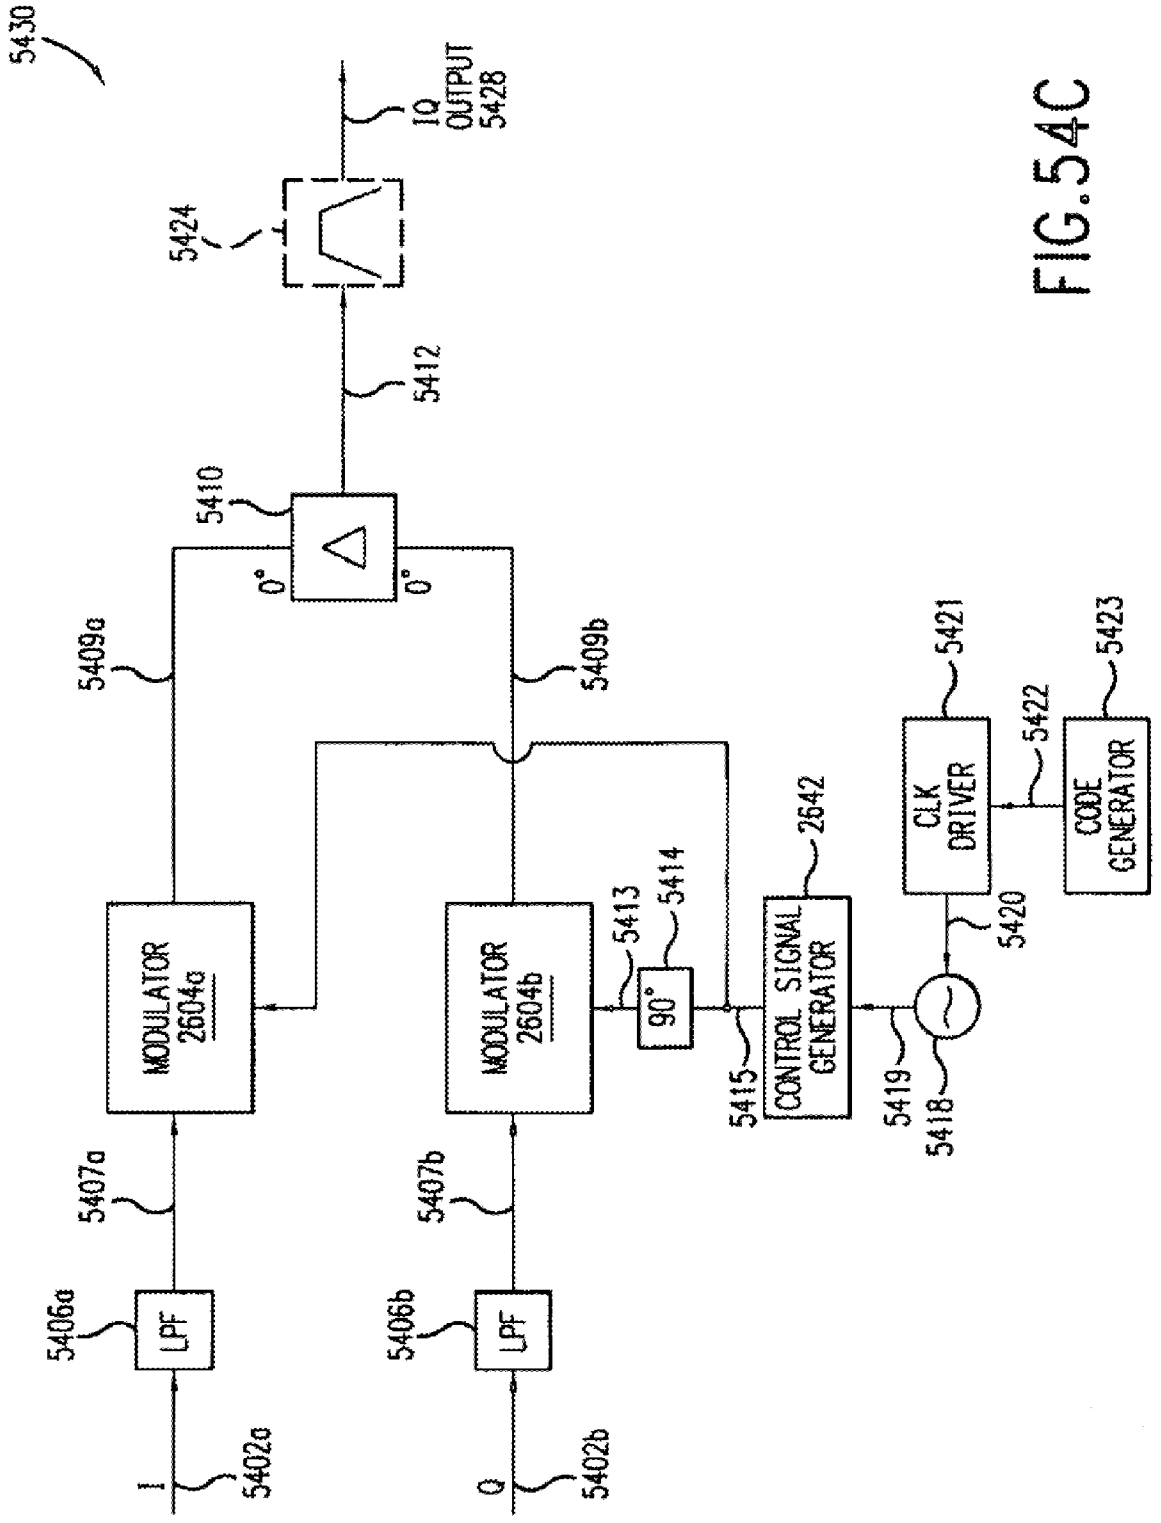

5430
IQ OUTPUT 5428
5424
5412
5410
0°
0°
5409a
5409b
MODULATOR 2604a
MODULATOR 2604b
5413
5414
90°
5415
CONTROL SIGNAL GENERATOR
2642
CLK DRIVER
5421
5422
CODE GENERATOR
5423
5420
5419
5418
5407a
5407b
5406a
5406b
LPF
LPF
I
Q
5402a
5402b

FIG.54C

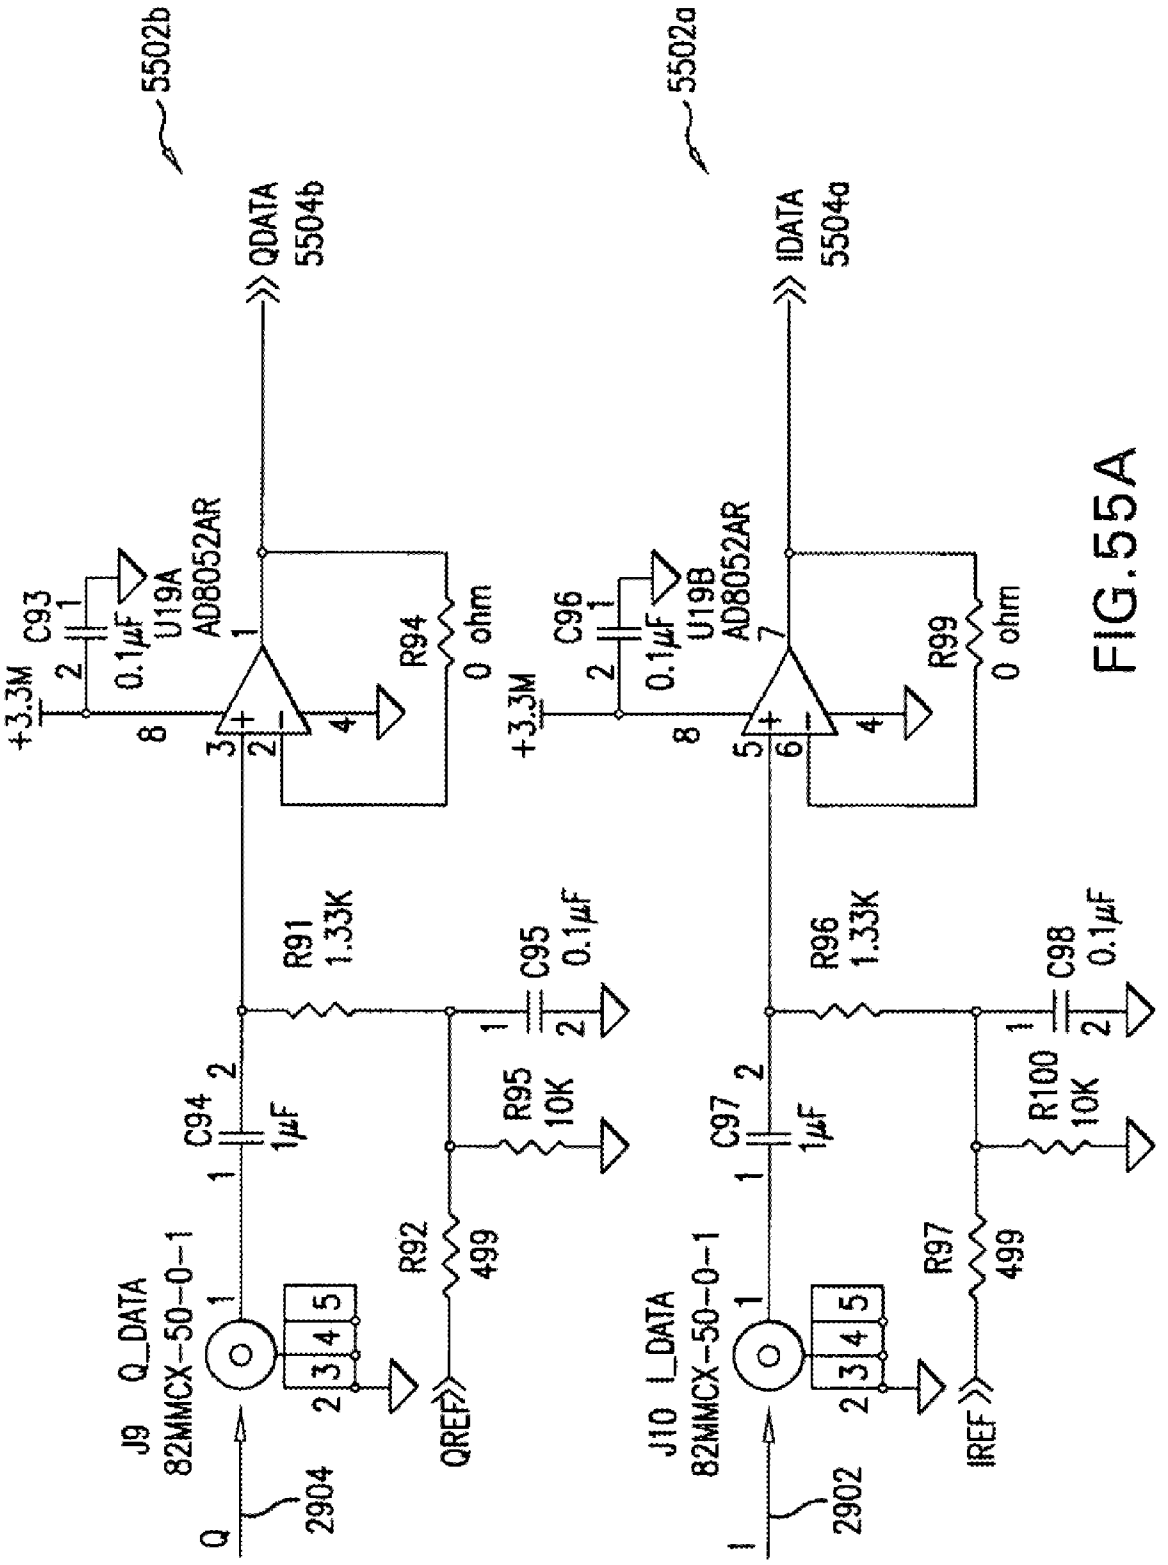

5502b
5502a
QDATA
5504b
IDATA
5504a
+3.3M
C93
0.1μF
U19A
AD8052AR
R94
0 ohm
C96
U19B
R99
R91
1.33K
C95
0.1μF
R96
C98
C94
1μF
C97
R95
10K
R100
R92
499
R97
J9 Q_DATA
82MMCX-50-0-1
J10 I_DATA
QREF
IREF
Q
I
2904
2902

FIG.55A

FIG.55 B-1	FIG.55 B-2	FIG.55 B-3	FIG.55 B-4

FIG.55B

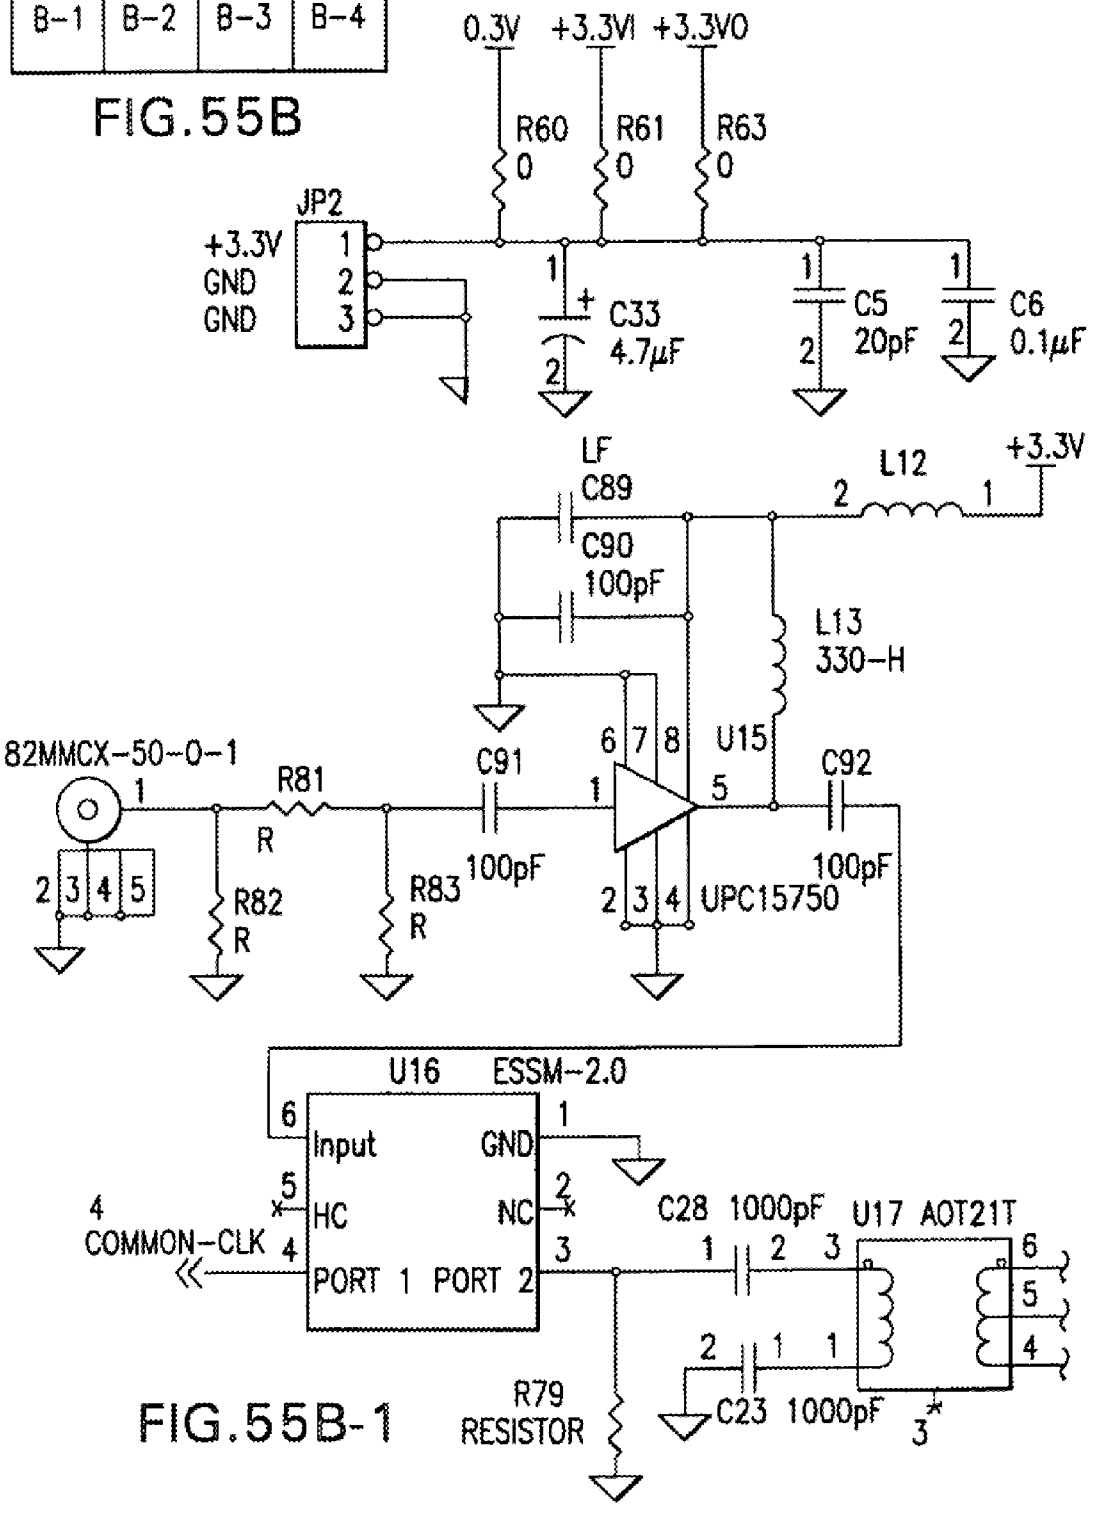


FIG.55B-1

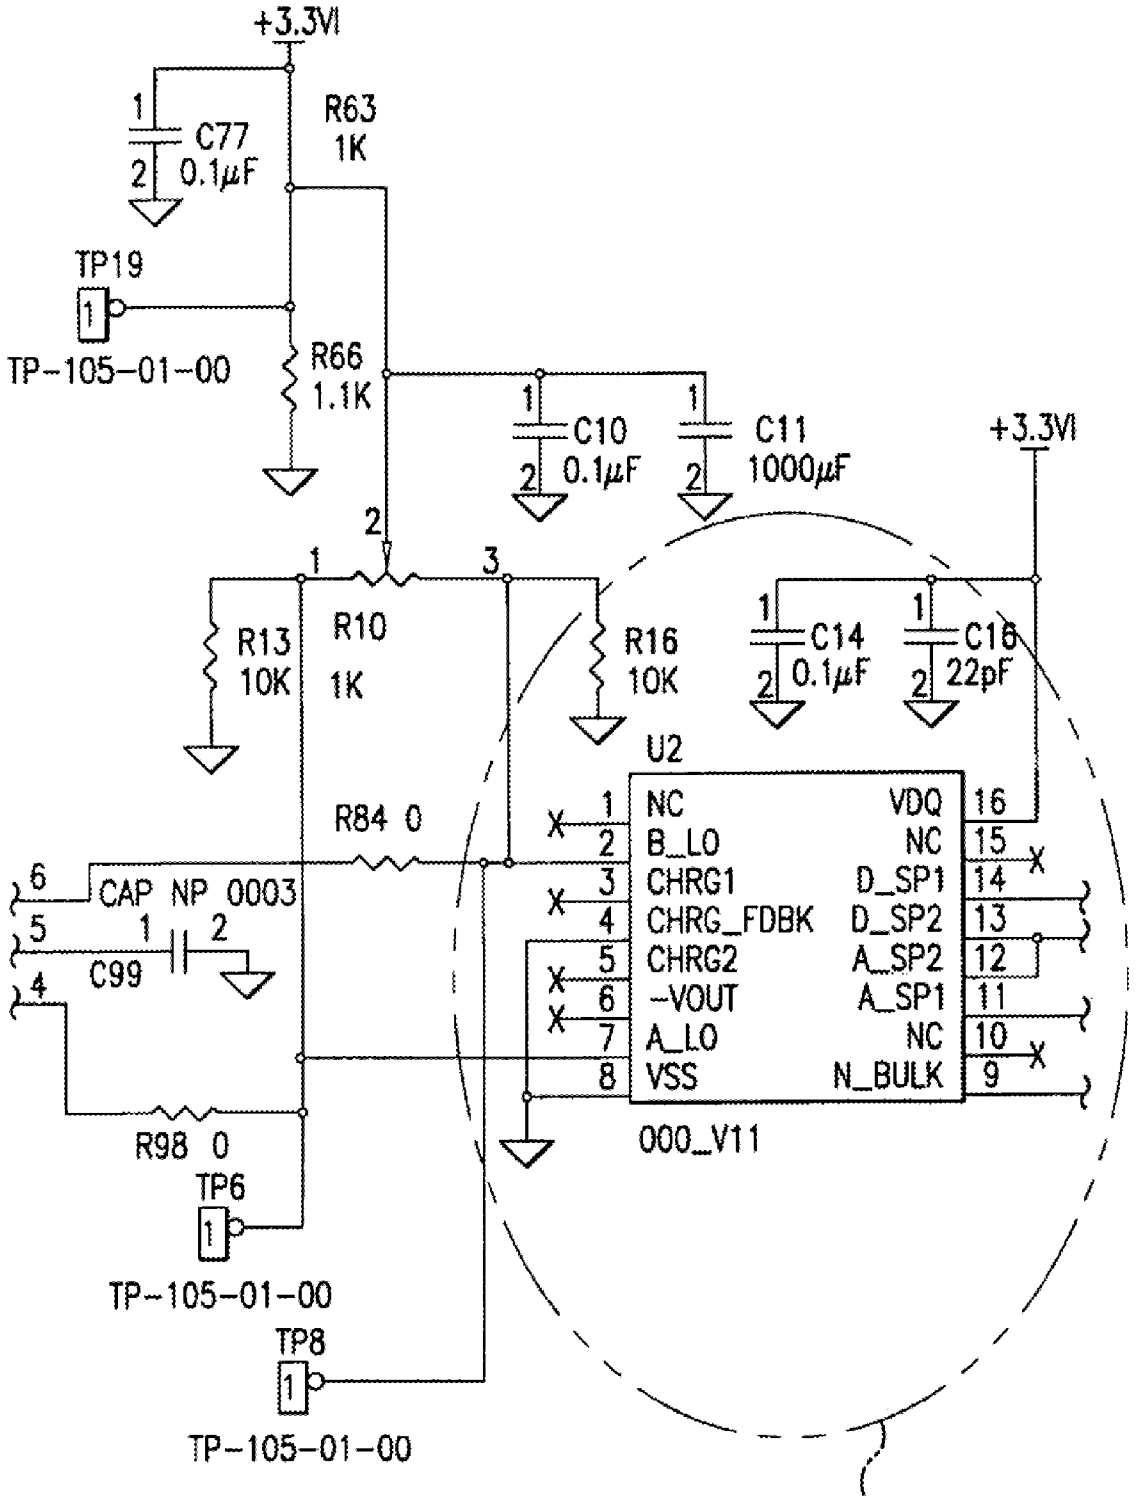

+3.3VI
C77
0.1µF
R63
1K
TP19
TP-105-01-00
R66
1.1K
C10
0.1µF
C11
1000µF
+3.3VI
R13
10K
R10
1K
R16
10K
C14
0.1µF
C16
22pF
U2
R84 0
NC
B_LO
CHRG1
CHRG_FDBK
CHRG2
-VOUT
A_LO
VSS
VDQ
NC
D_SP1
D_SP2
A_SP2
A_SP1
NC
N_BULK
CAP NP 0003
C99
R98 0
TP6
TP-105-01-00
TP8
TP-105-01-00
000_V11
UFT
2624a,2628b

FIG.55B-2

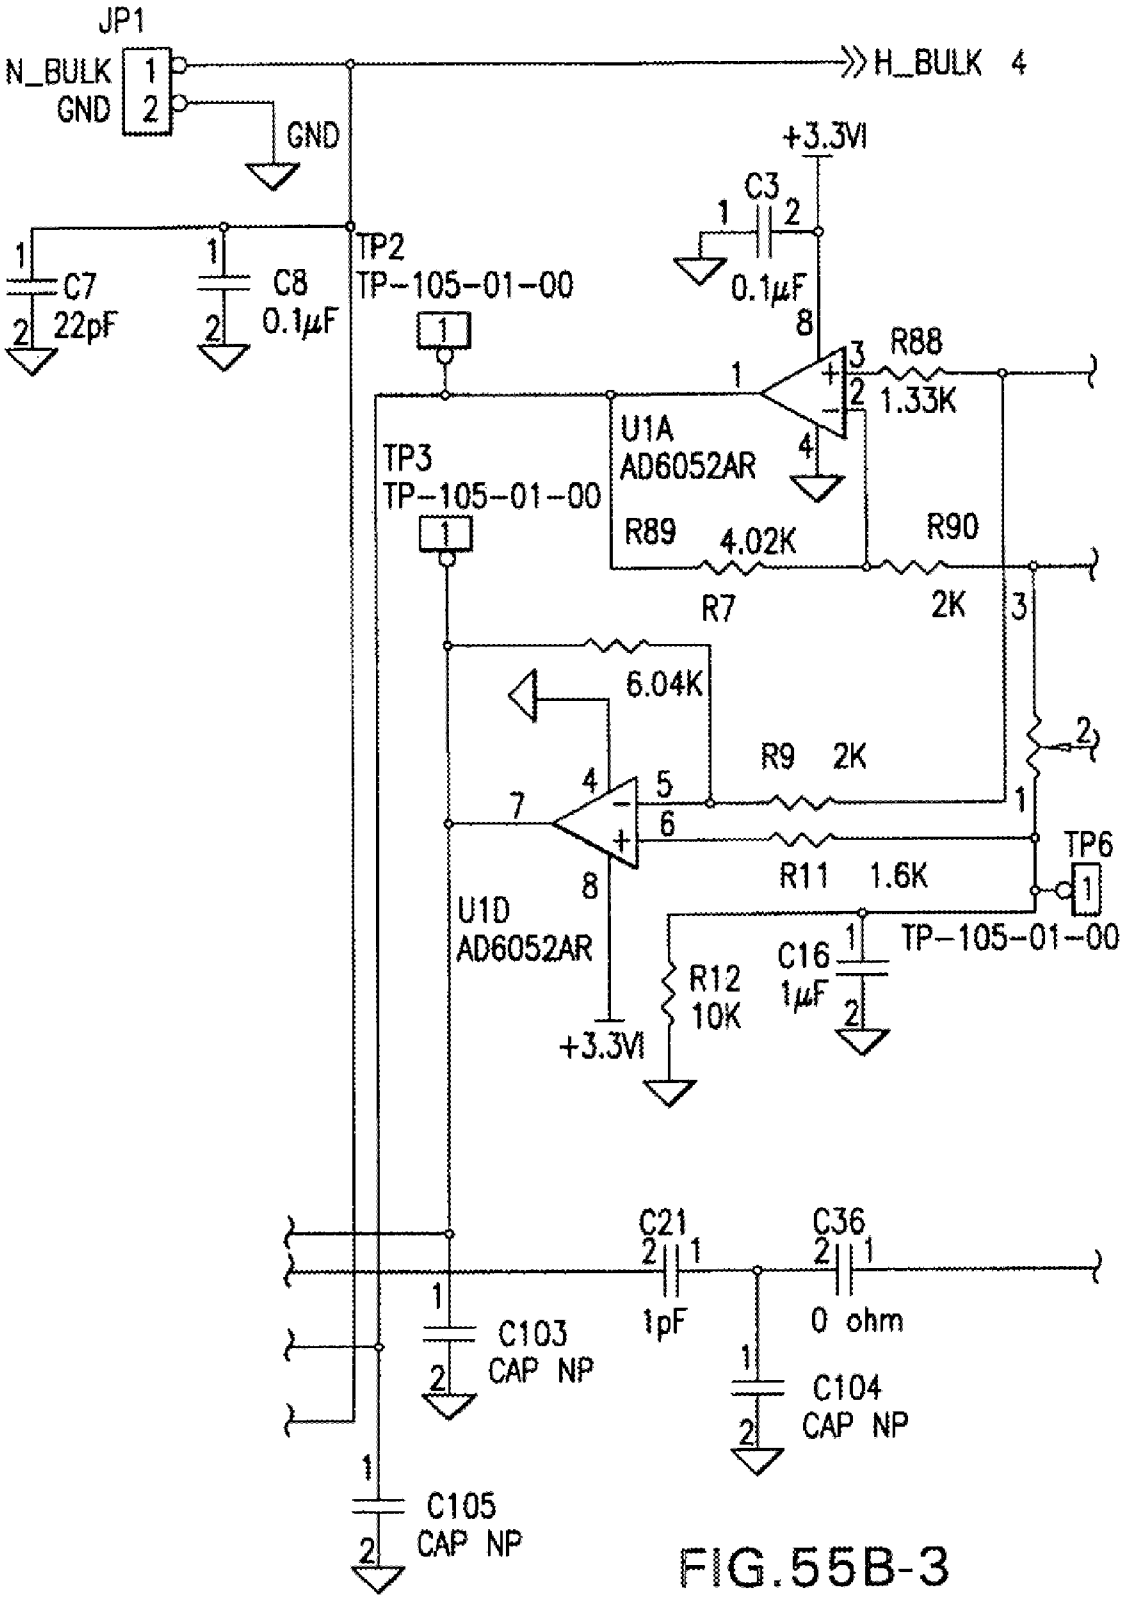

JP1
N_BULK
GND
GND
H_BULK
+3.3VI
C3
0.1µF
C7
22pF
C8
0.1µF
TP2
TP-105-01-00
R88
1.33K
U1A
AD6052AR
TP3
TP-105-01-00
R89
4.02K
R90
2K
R7
6.04K
R9
2K
TP6
R11
1.6K
U1D
AD6052AR
C16
1µF
TP-105-01-00
R12
10K
+3.3VI
C21
1pF
C36
0 ohm
C103
CAP NP
C104
CAP NP
C105
CAP NP

FIG.55B-3

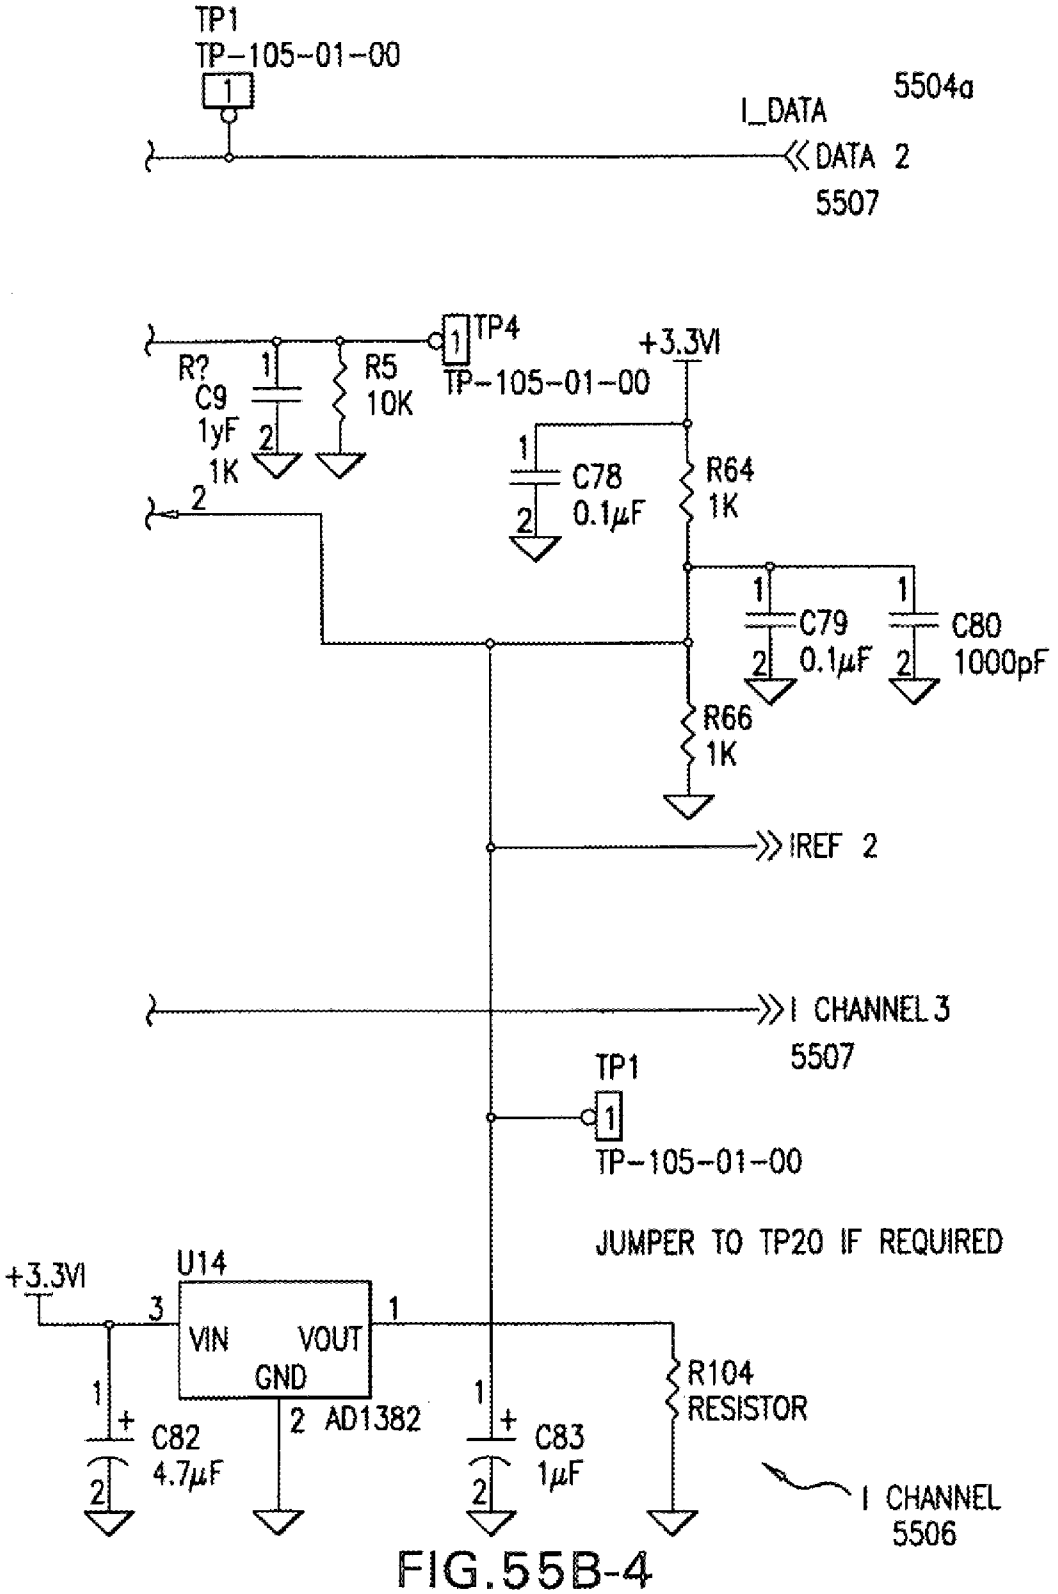

TP1
TP-105-01-00
1
I_DATA
5504a
DATA 2
5507
R?
C9
1yF
1K
2
1
2
R5
10K
TP4
TP-105-01-00
+3.3VI
C78
0.1µF
R64
1K
C79
0.1µF
C80
1000pF
R66
1K
IREF 2
I CHANNEL 3
5507
TP1
TP-105-01-00
JUMPER TO TP20 IF REQUIRED
+3.3VI
U14
VIN
VOUT
GND
AD1382
C82
4.7µF
C83
1µF
R104
RESISTOR
I CHANNEL
5506

FIG.55B-4

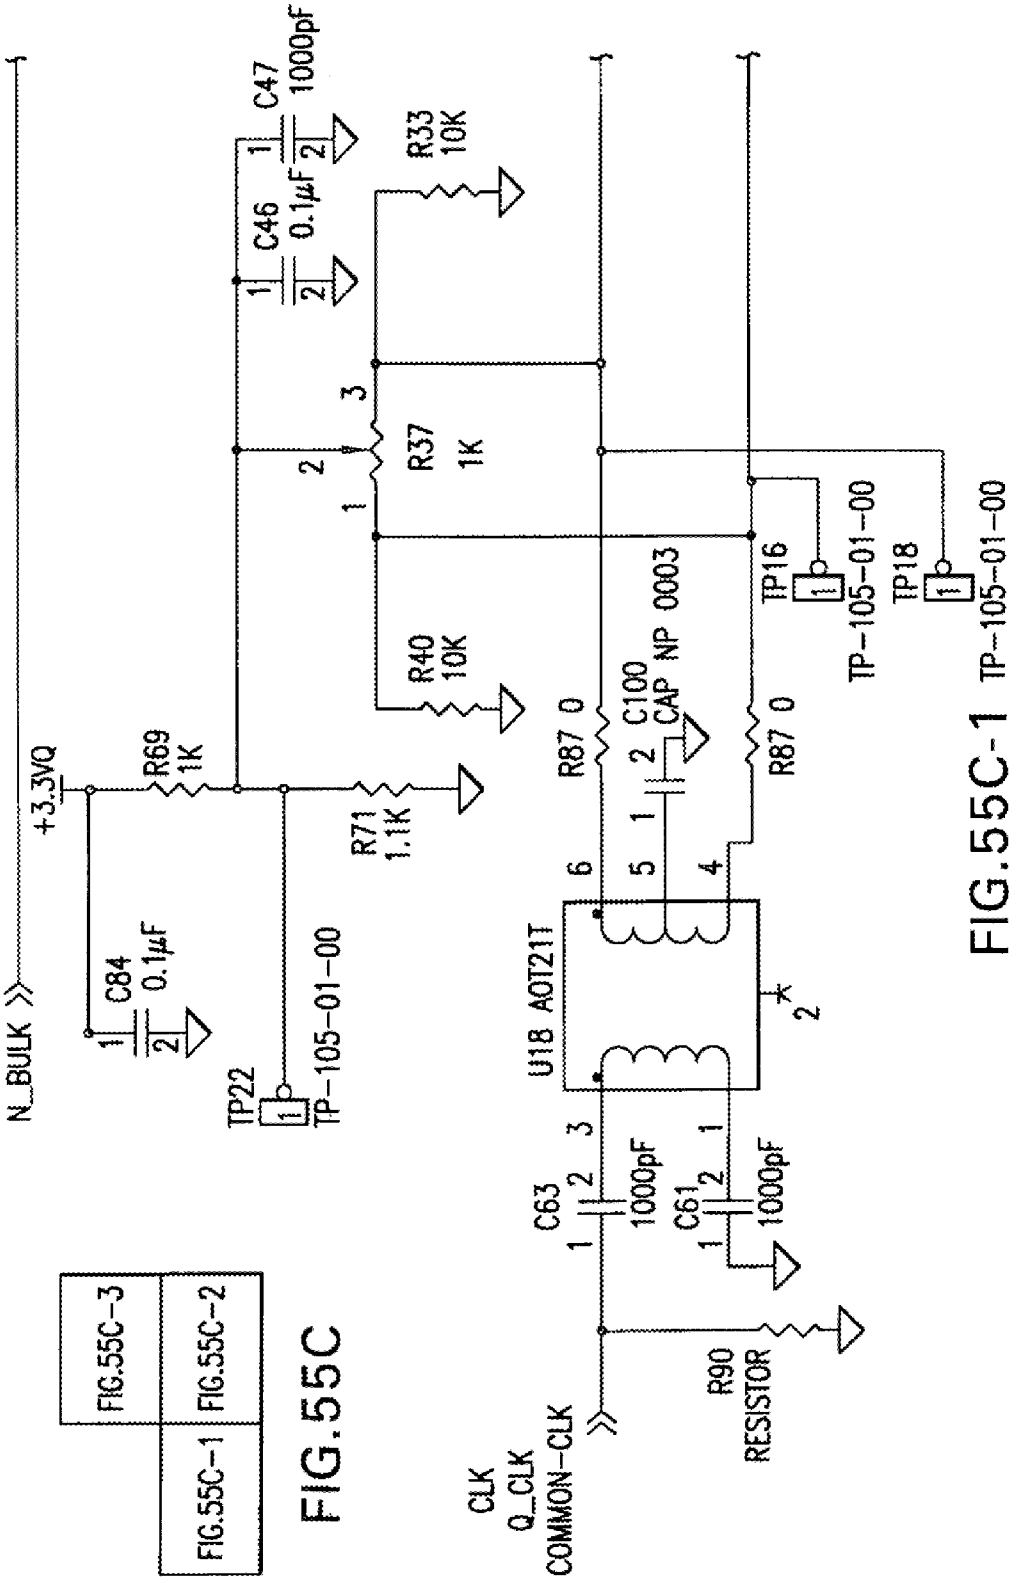


FIG.55C-1

FIG.55C

FIG.55C-3 FIG.55C-2 FIG.55C-1

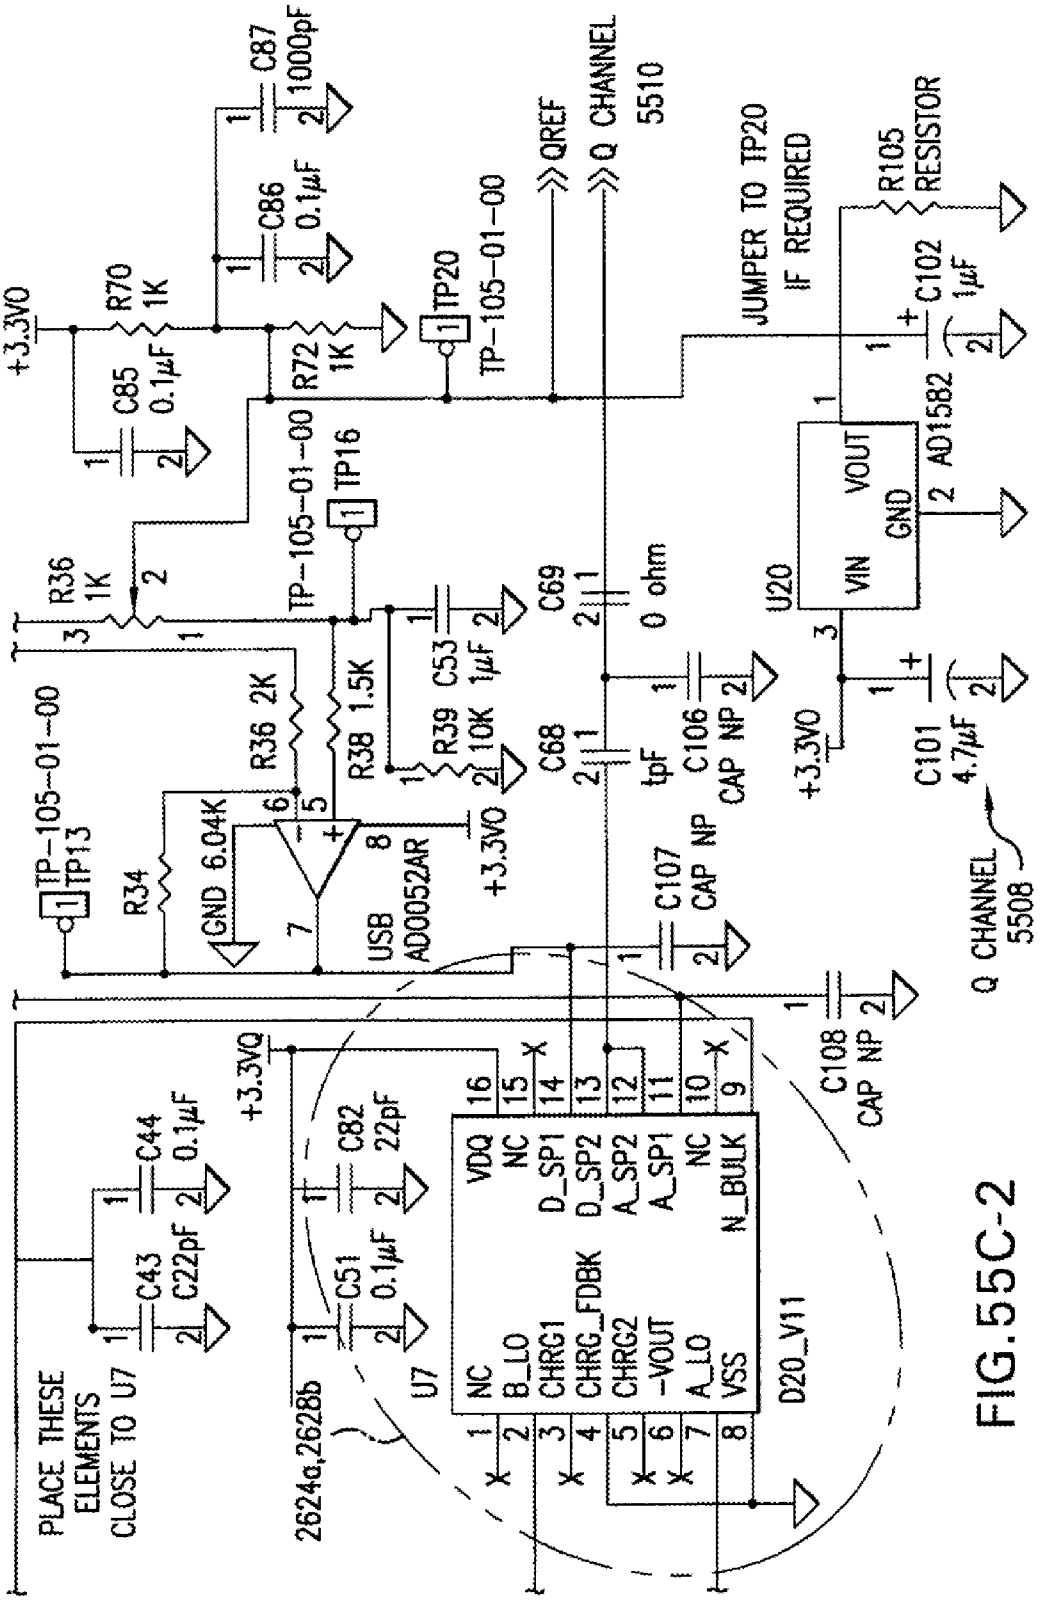

PLACE THESE ELEMENTS CLOSE TO U7
C43 C22pF
C44 0.1µF
C51 0.1µF
C82 22pF
+3.3VQ
2624a,2628b
U7
NC
B_LO
CHRG1
CHRG_FDBK
CHRG2
-VOUT
A_LO
VSS
VDQ
NC
D_SP1
D_SP2
A_SP2
A_SP1
NC
N_BULK
D20_V11
C108 CAP NP
C107 CAP NP
C106 CAP NP
C68 tpF
C69 0 ohm
C53 1µF
R39 10K
R38 1.5K
R36 2K
R34
GND 6.04K
USB AD0052AR
+3.3VO
TP-105-01-00 TP13
TP-105-01-00 TP16
TP-105-01-00 TP20
R36 1K
R72 1K
R70 1K
C85 0.1µF
C86 0.1µF
C87 1000pF
>> QREF
>> Q CHANNEL 5510
JUMPER TO TP20 IF REQUIRED
U20
VIN
GND
VOUT
AD1582
C101 4.7µF
C102 1µF
R105 RESISTOR
Q CHANNEL 5508

FIG.55C-2

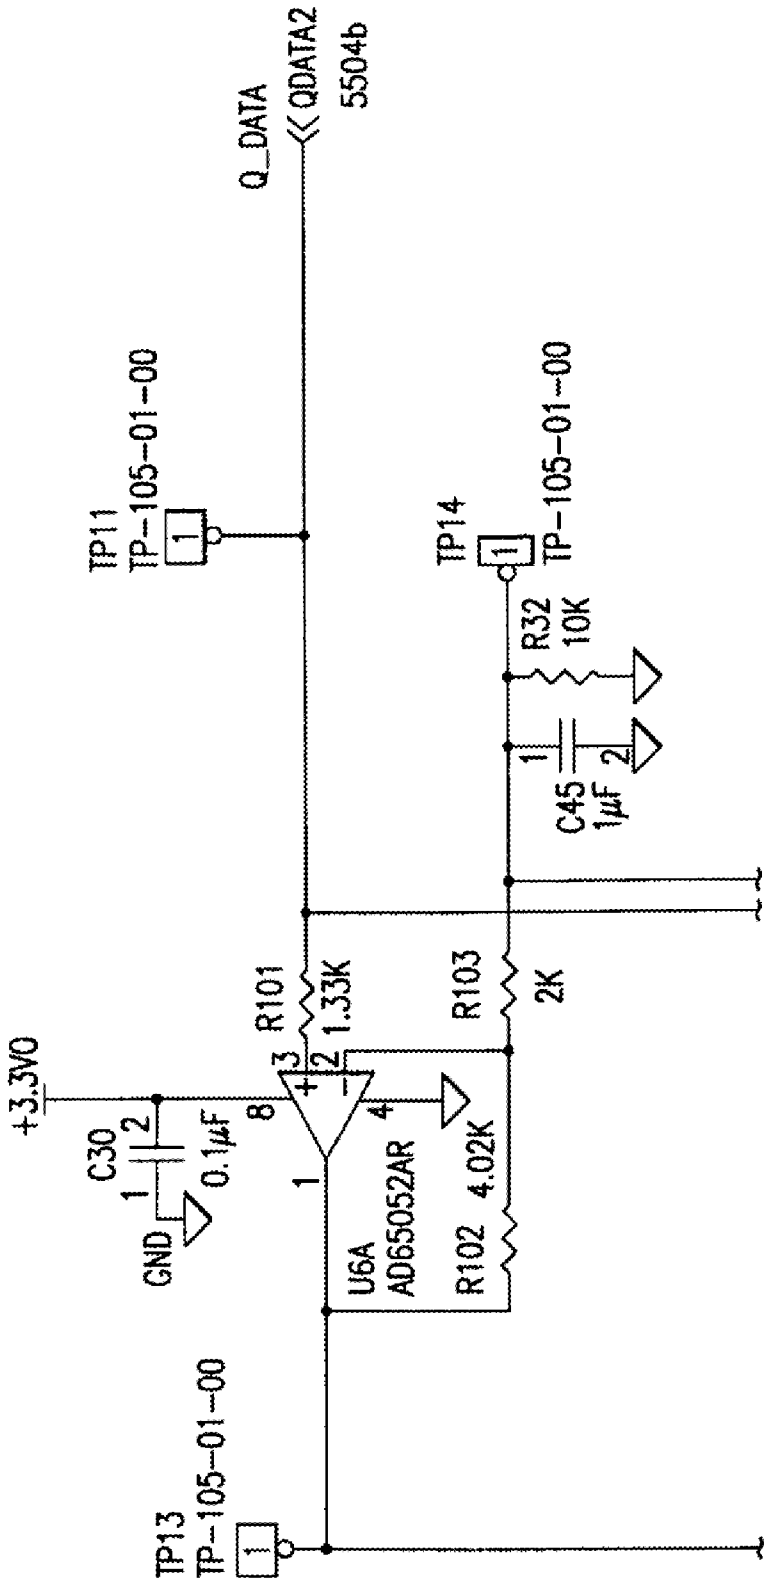

Q_DATA
QDATA2
5504b
TP11
TP-105-01-00
TP14
TP-105-01-00
R32
10K
C45
1μF
R101
1.33K
R103
2K
+3.3VO
C30
0.1μF
GND
U6A
AD65052AR
R102
4.02K
TP13
TP-105-01-00

FIG.55C-3

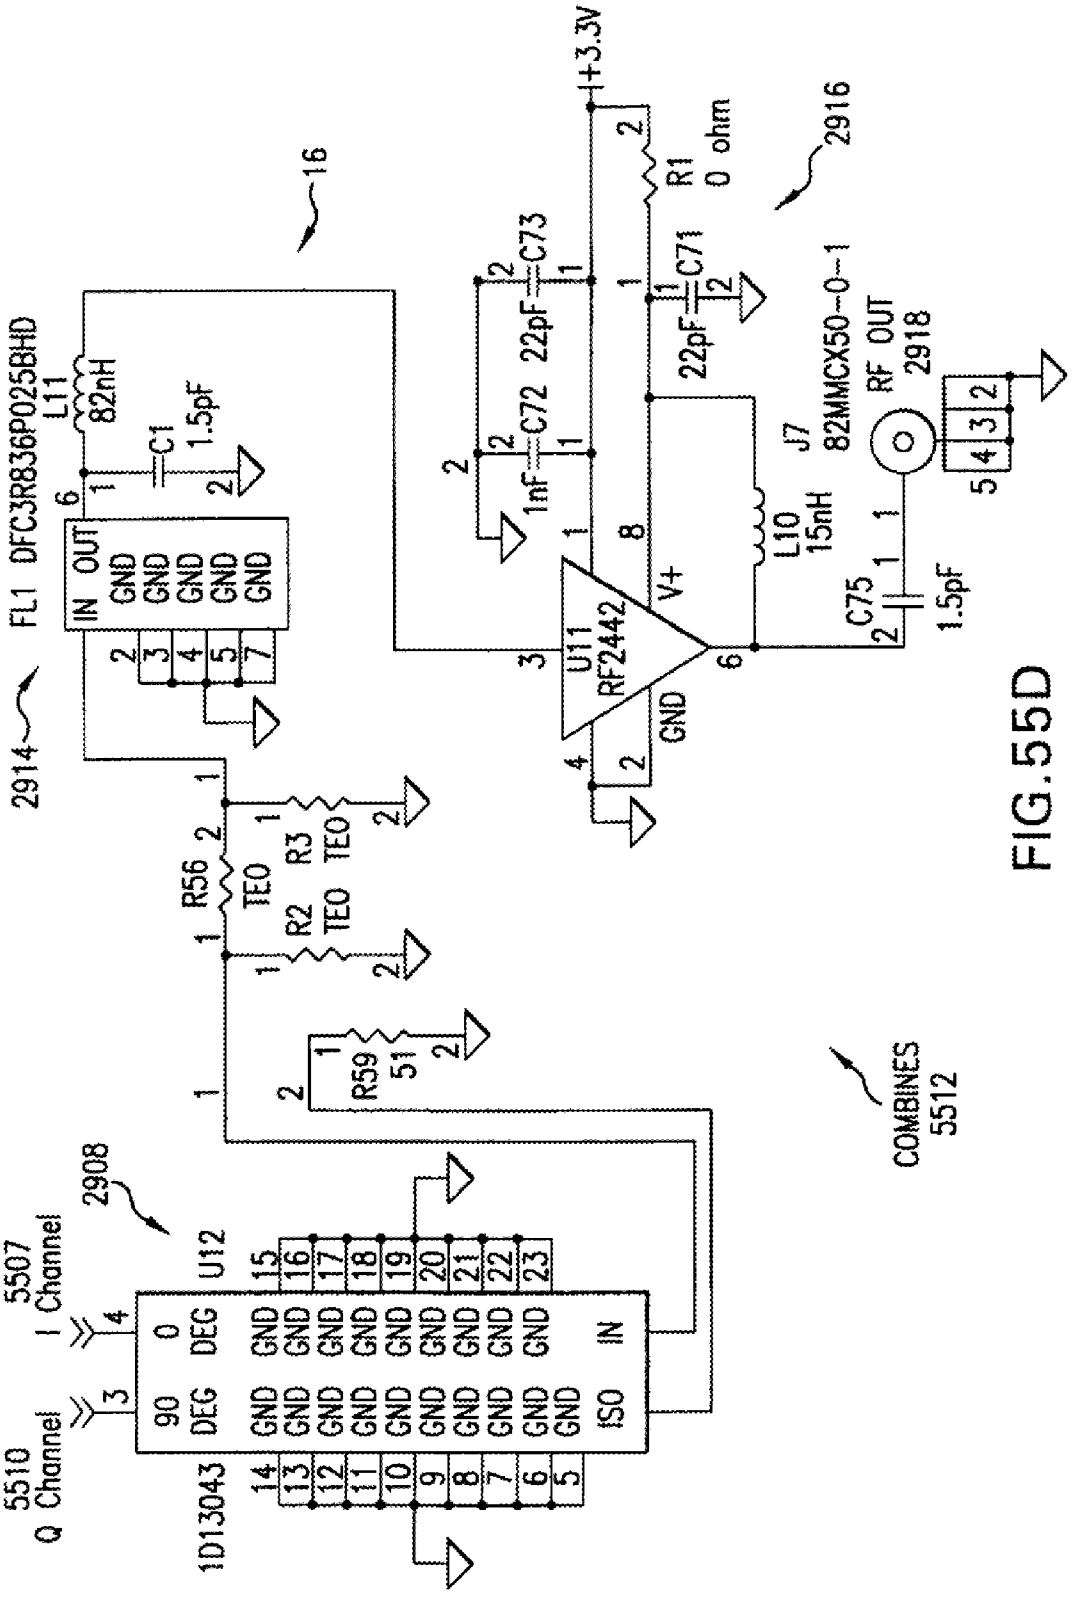

16
2916
+3.3V
R1
0 ohm
C73
22pF
C72
22pF
1nF
C71
22pF
FL1 DFC3R836P025BHD
L11
82nH
C1
1.5pF
IN OUT GND GND GND GND GND
2914
U11
RF2442
V+
GND
L10
15nH
J7
82MMCX50-0-1
RF OUT
2918
C75
1.5pF
R56 TEO
R2 TEO
R3 TEO
R59
51
COMBINES
5512
2908
U12
5507
I Channel
5510
Q Channel
1D13043
0 DEG
90 DEG
IN
ISO
GND

FIG.55D

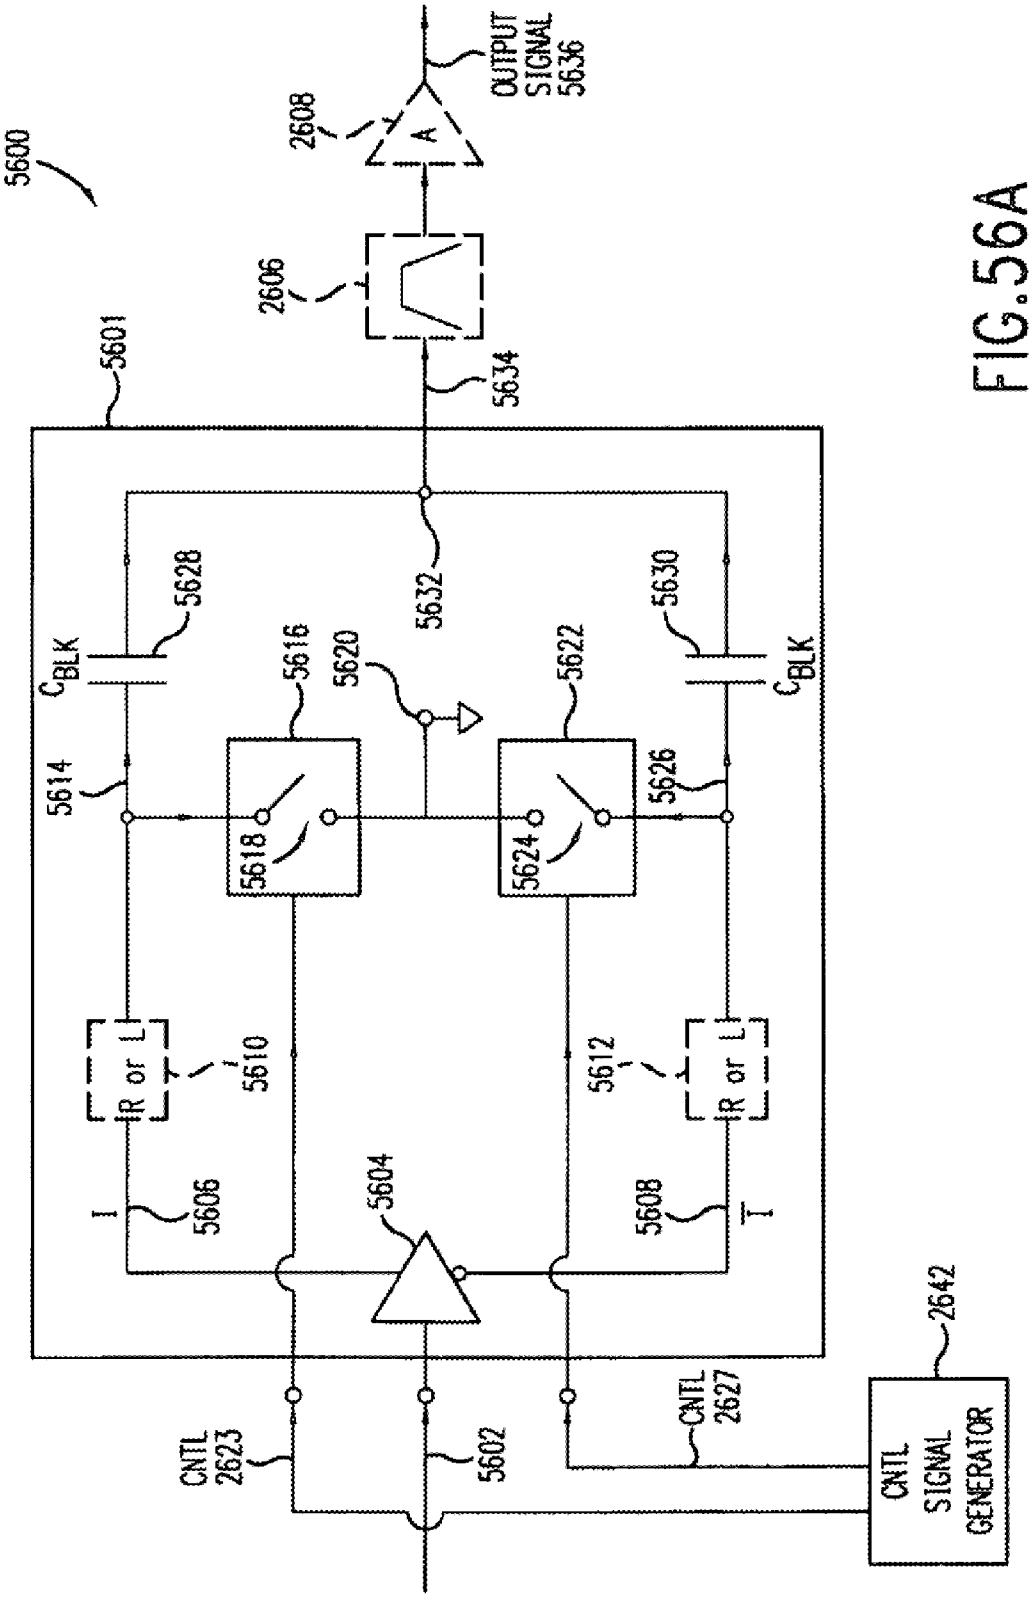

5600
2608
A
OUTPUT SIGNAL 5636
2606
5601
5634
5632
5628
5630
C_{BLK}
C_{BLK}
5616
5620
5622
5614
5626
5618
5624
R or L
5610
R or L
5612
I
5606
5604
5608
$\overline{I}$
2642
CNTL 2627
CNTL 2623
5602
CNTL SIGNAL GENERATOR

FIG.56A

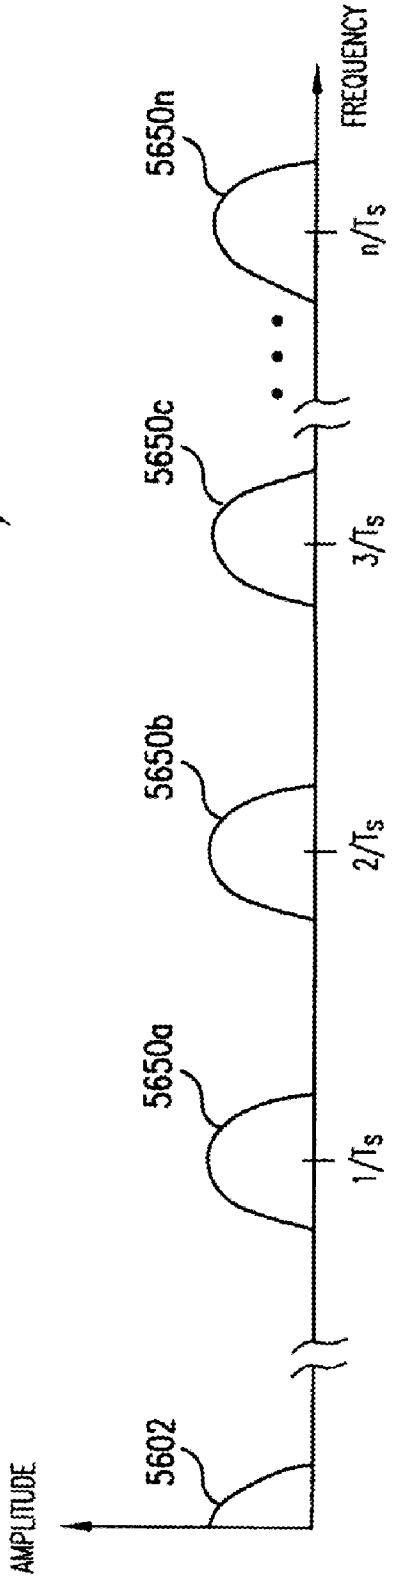

5614
5650n
5650c
5650b
5650a
5602
FREQUENCY
AMPLITUDE
n/Ts
3/Ts
2/Ts
1/Ts

FIG.56B

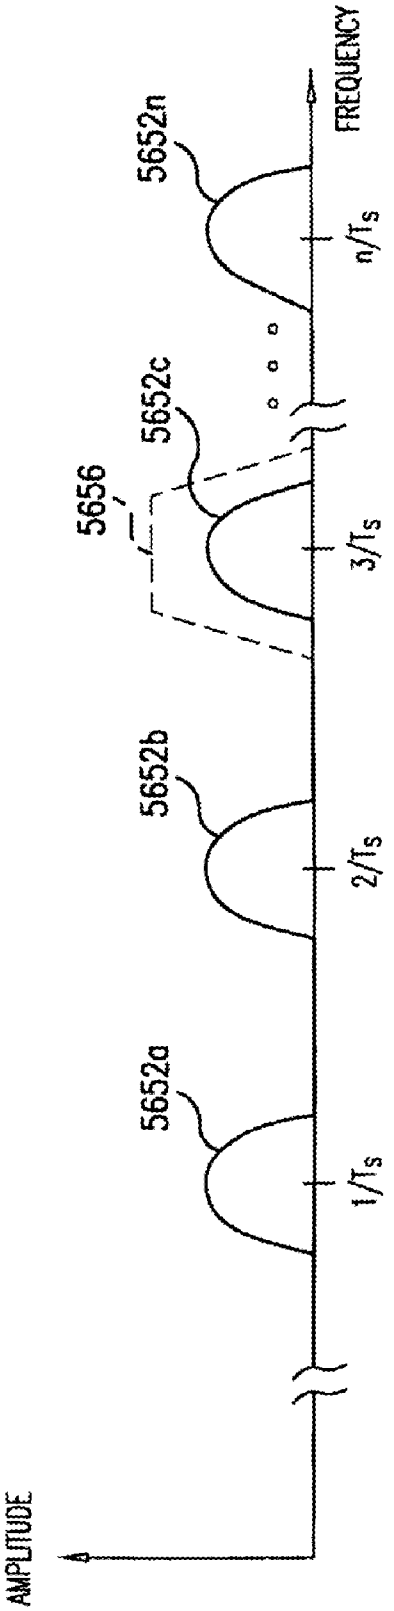

5632
5656
5652a
5652b
5652c
5652n
AMPLITUDE
FREQUENCY
1/Ts
2/Ts
3/Ts
n/Ts

FIG.56C

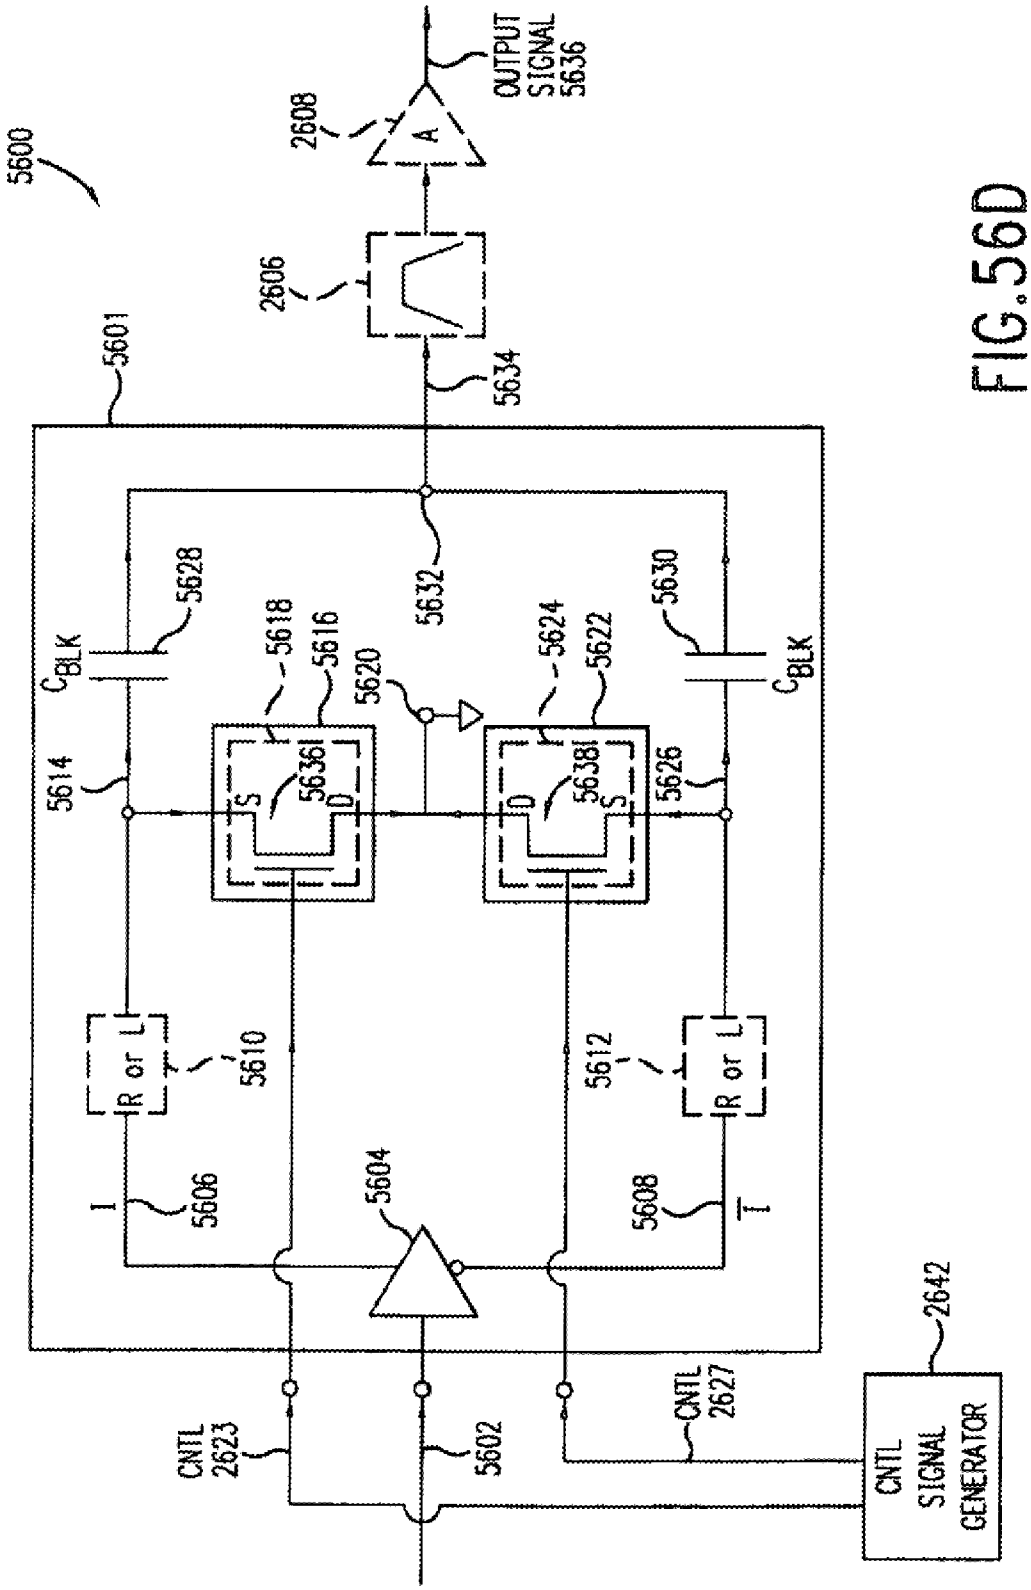

5600
2608
A
OUTPUT SIGNAL 5636
2606
5601
5634
5632
5628
5618
5616
5620
5624
5622
5630
C_{BLK}
C_{BLK}
5614
S
D
5636I
D
S
5626
R or L
5610
5612
R or L
I
5606
5604
5608
$\overline{I}$
2642
CNTL 2623
5602
CNTL 2627
CNTL SIGNAL GENERATOR

FIG.56D

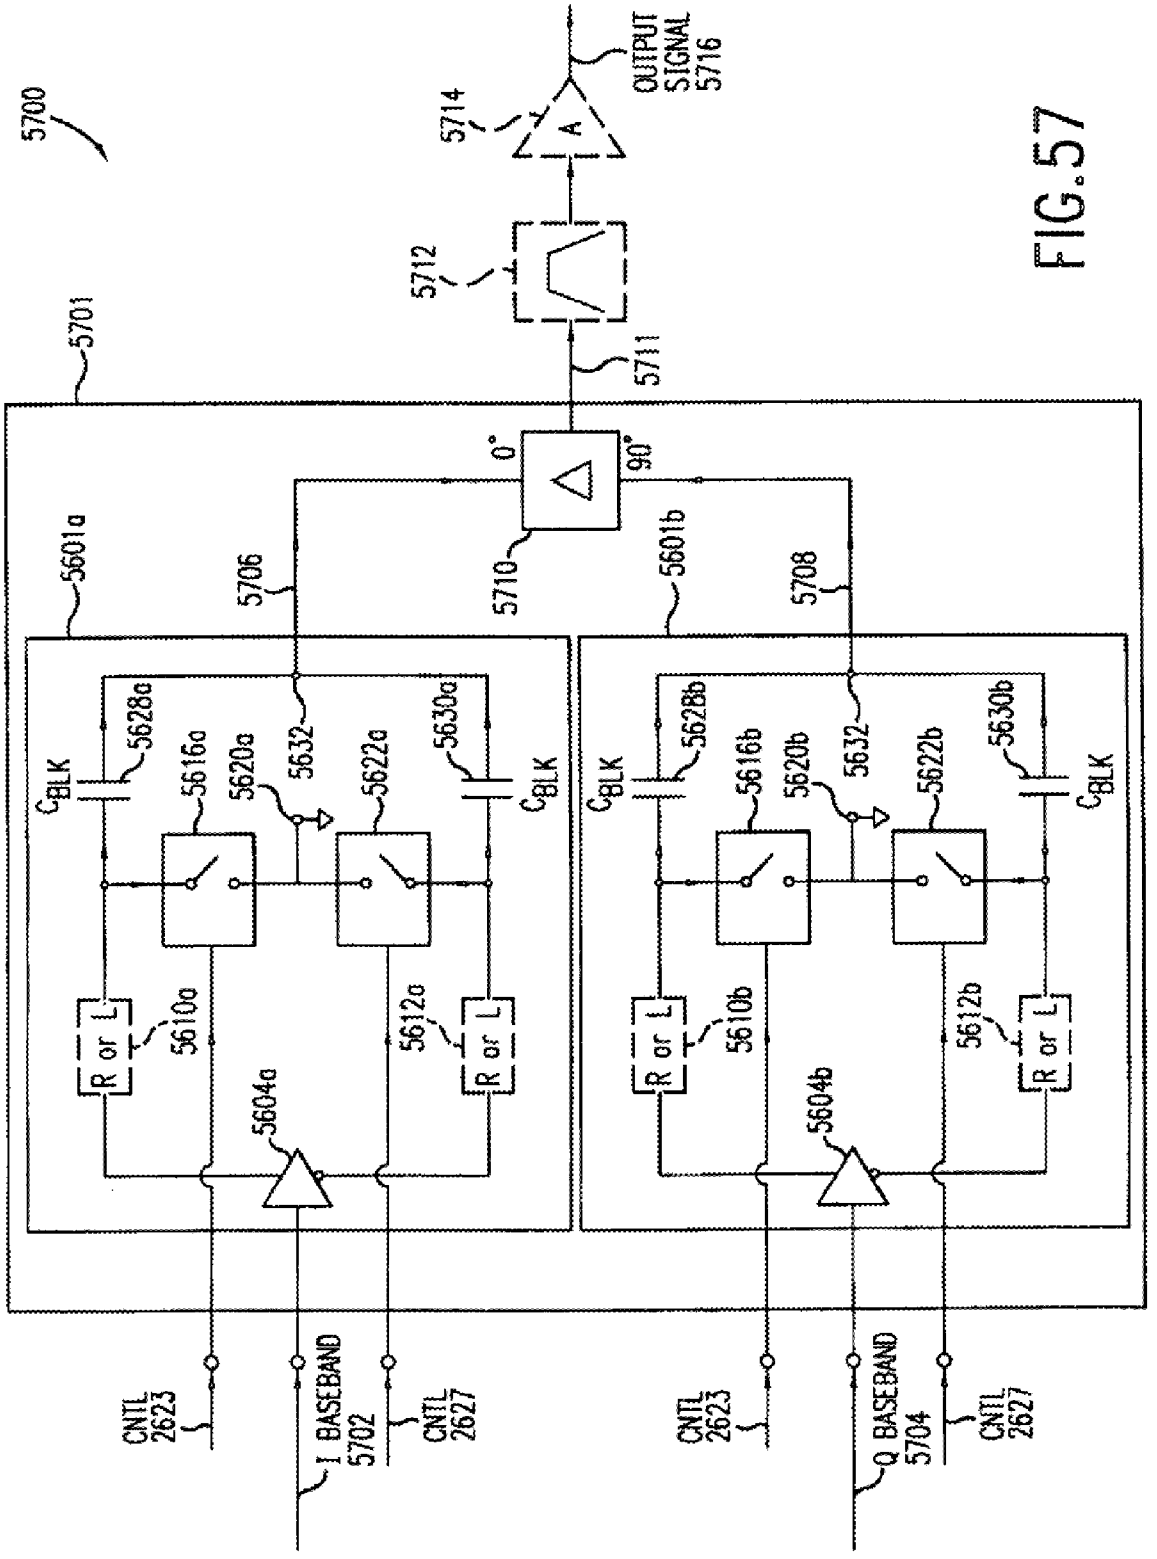

5700
5714
A
OUTPUT SIGNAL 5716
5712
5711
5701
0°
90°
5710
5706
5708
5601a
5601b
C_{BLK}
5628a
5616a
5620a
5632
5622a
5630a
5610a
5612a
R or L
5604a
5628b
5616b
5620b
5622b
5630b
5610b
5612b
5604b
CNTL 2623
I BASEBAND 5702
CNTL 2627
Q BASEBAND 5704

FIG.57

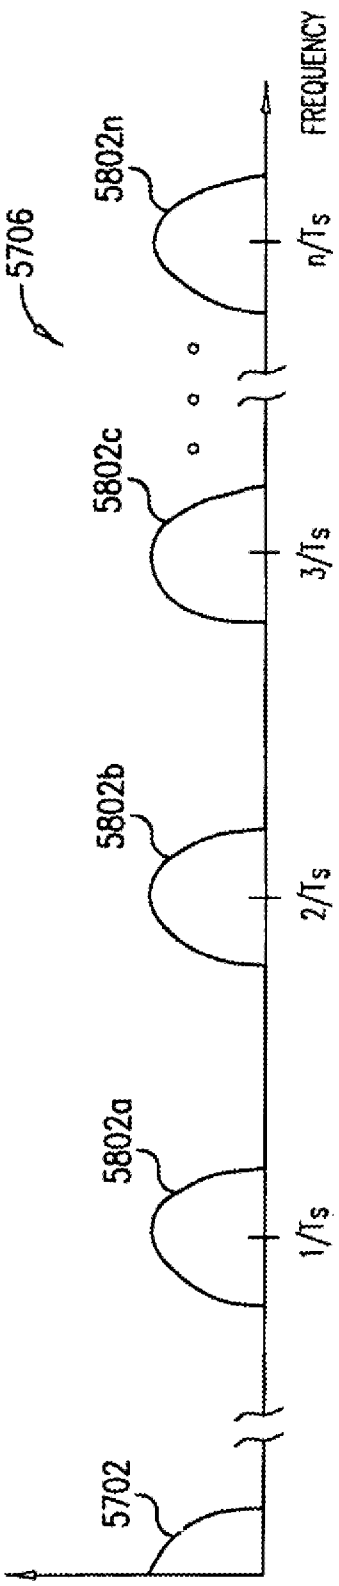


FIG.58A

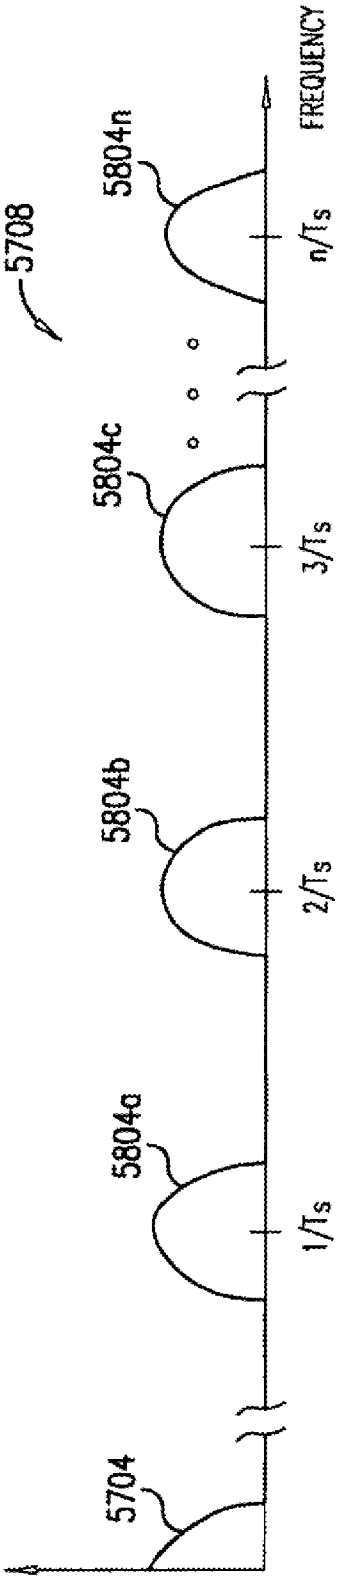


FIG.58B

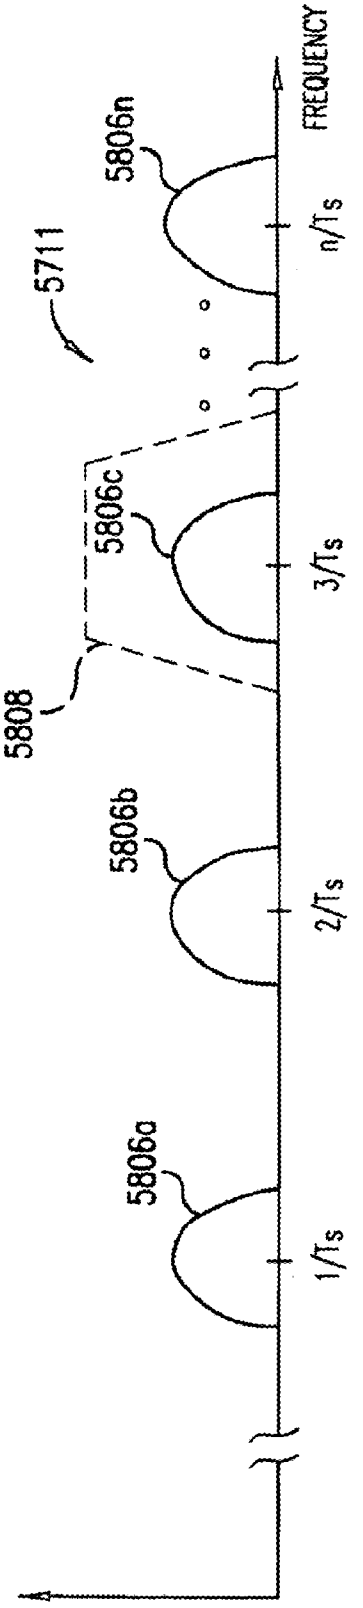


FIG.58C

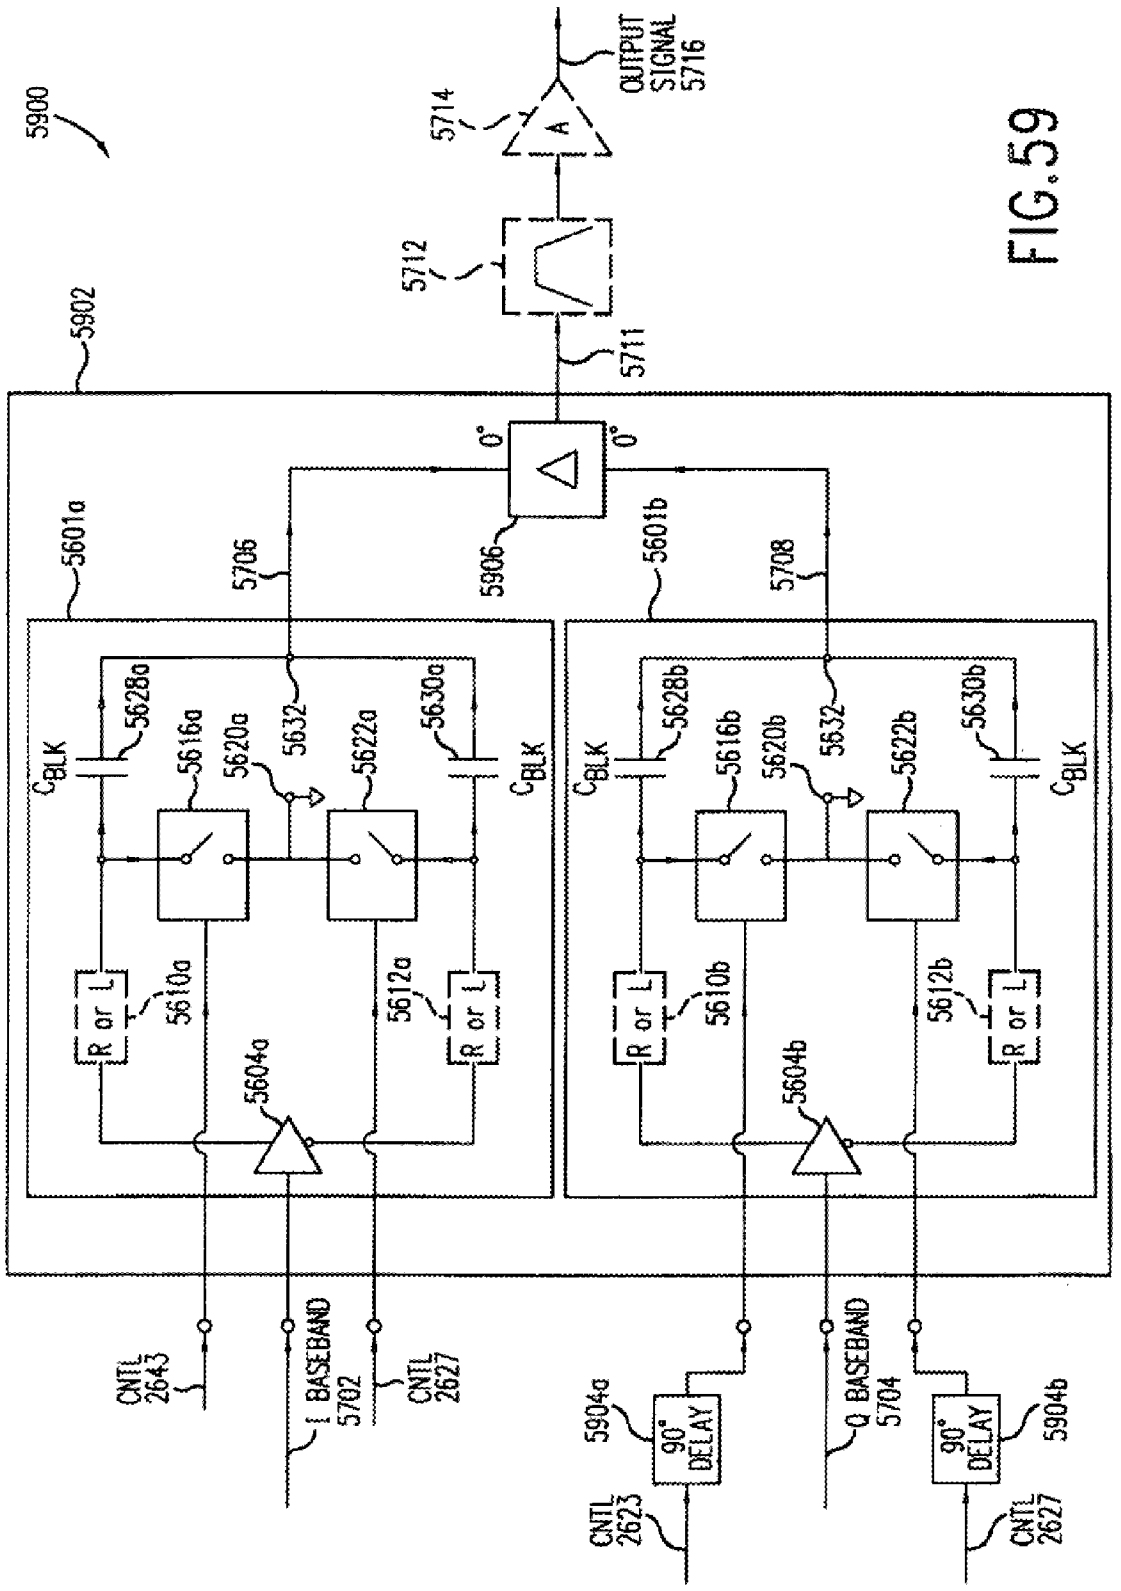

5900
5714
OUTPUT SIGNAL 5716
5712
5711
5902
0°
0°
5906
5601a
5706
5601b
5708
C_{BLK}
5628a
5616a
5620a
5632
5622a
5630a
5610a
5612a
R or L
5604a
5628b
5616b
5620b
5622b
5630b
5610b
5612b
5604b
CNTL 2643
I BASEBAND 5702
CNTL 2627
Q BASEBAND 5704
5904a
90° DELAY
CNTL 2623
5904b

FIG.59

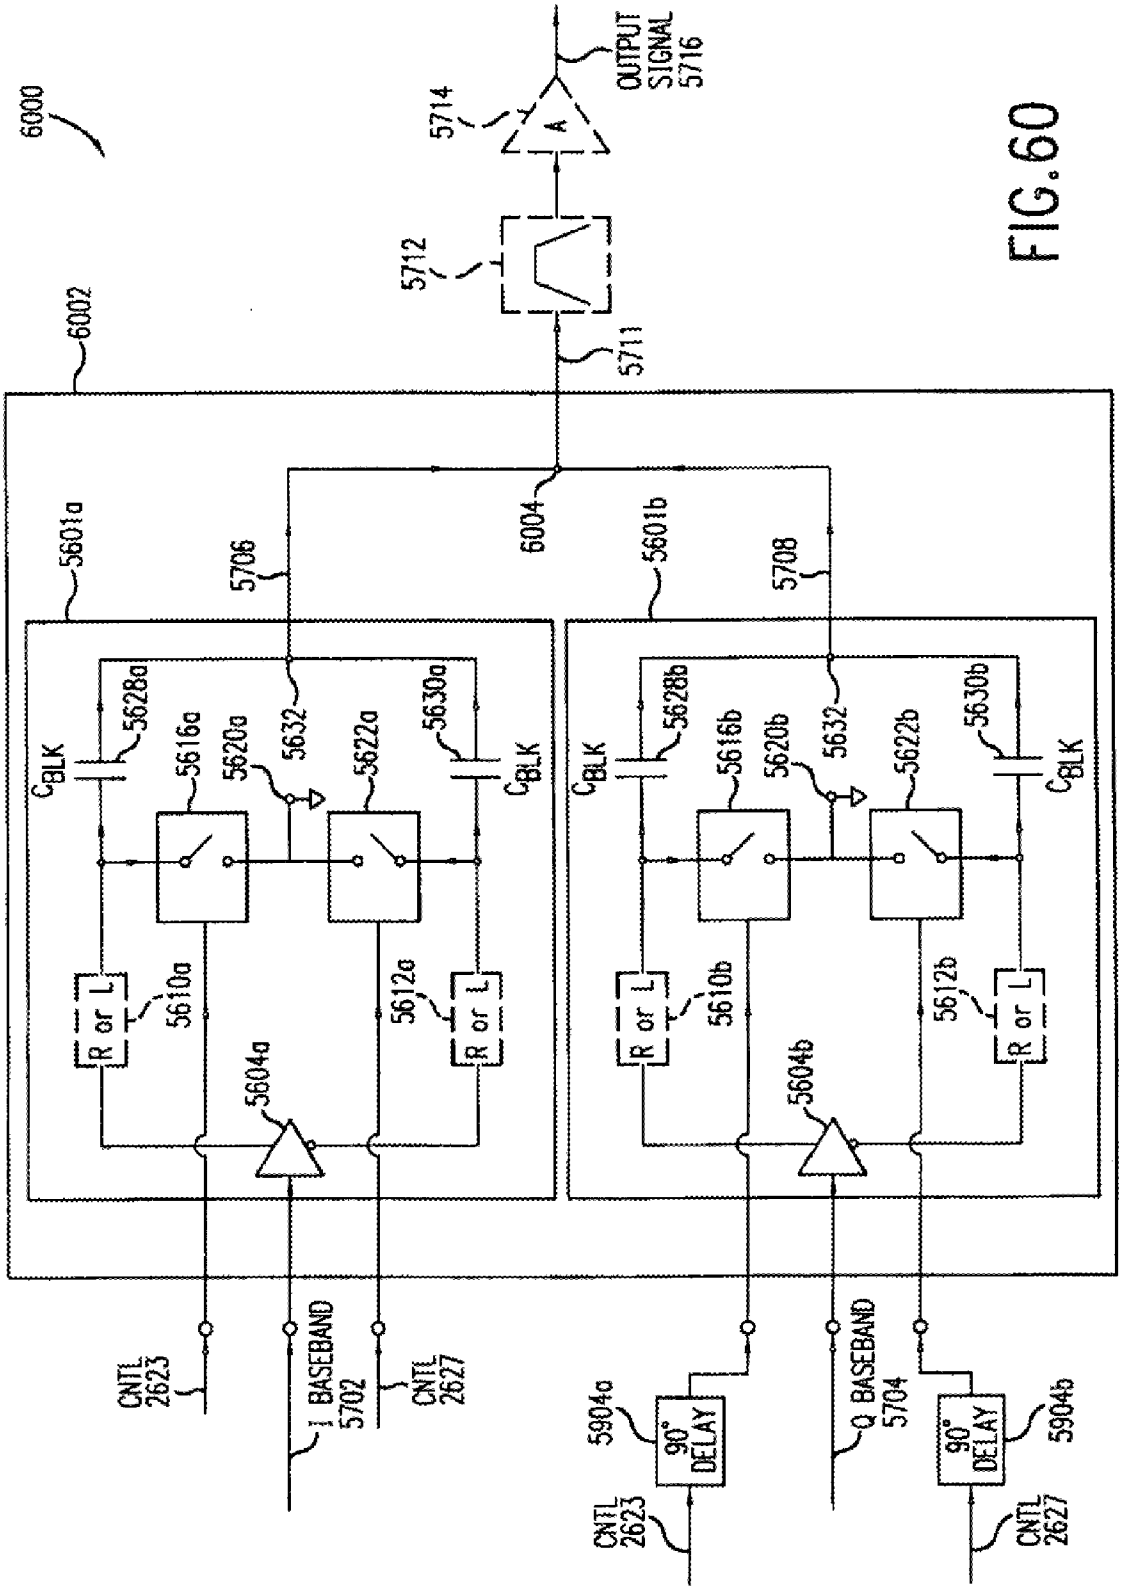

6000
6002
5714
OUTPUT SIGNAL 5716
5712
5711
6004
5601a
5706
5601b
5708
5628a
5616a
5620a
5632
5622a
5630a
C_{BLK}
5610a
5612a
R or L
5604a
5628b
5616b
5620b
5622b
5630b
5610b
5612b
5604b
CNTL 2623
I BASEBAND 5702
CNTL 2627
Q BASEBAND 5704
5904a
5904b
90° DELAY

FIG.60

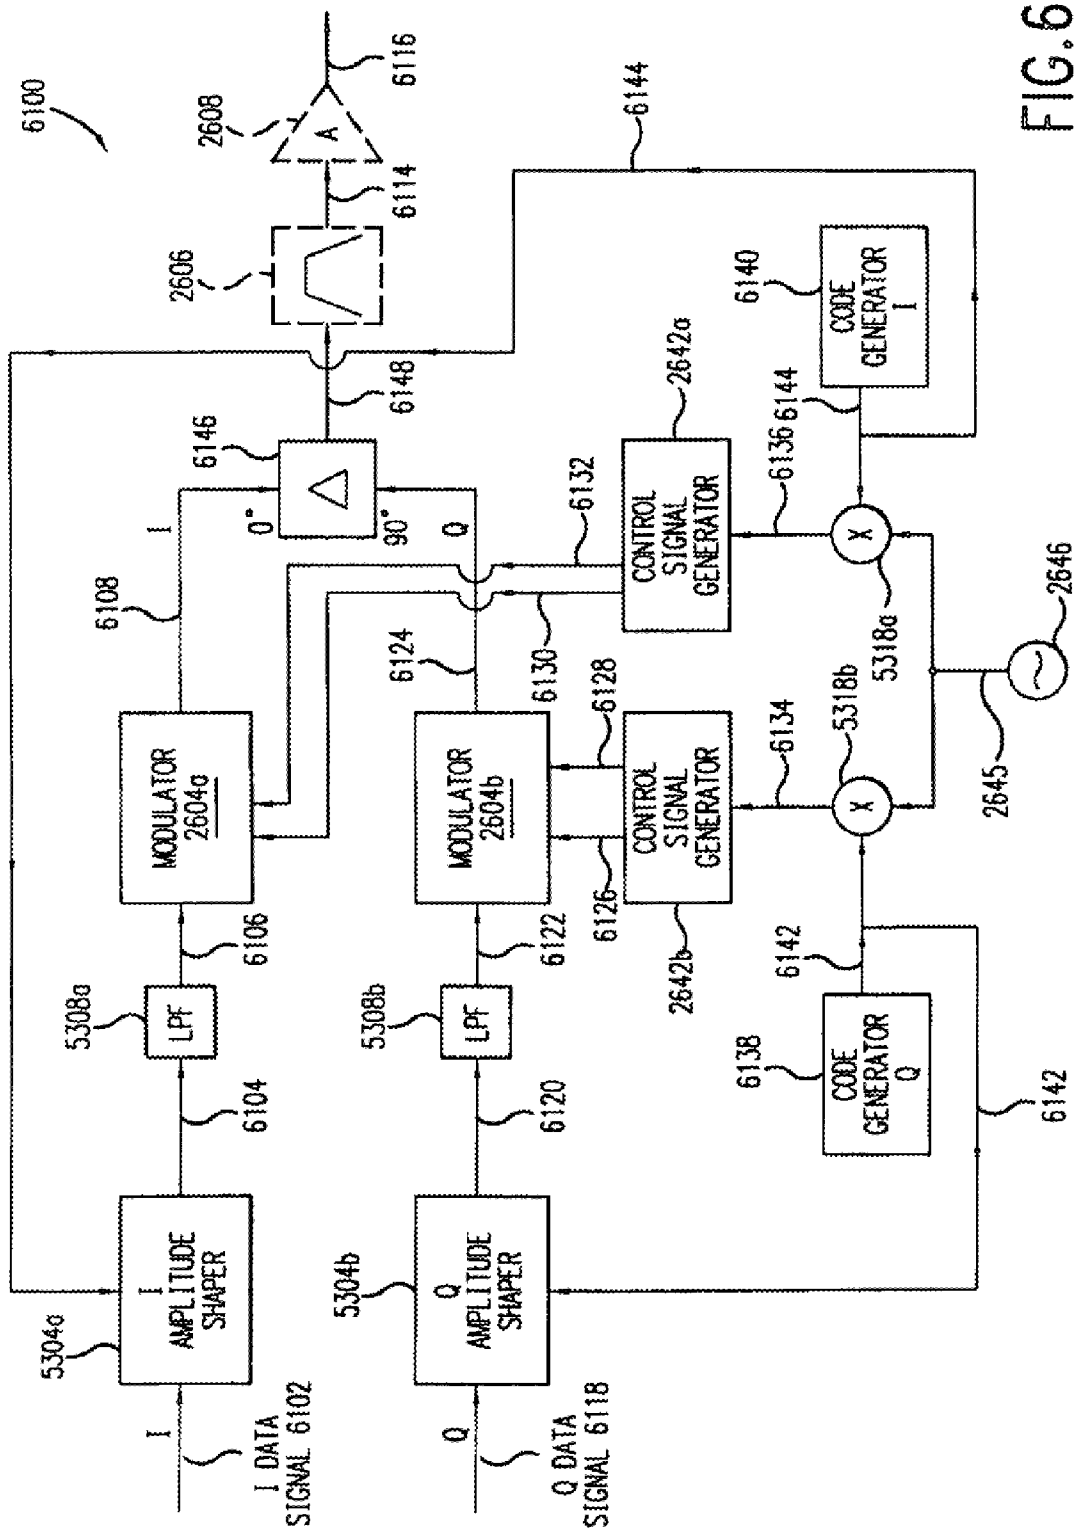

6100
2608
A
6116
6114
6144
2606
6140
CODE GENERATOR I
6148
2642a
6146
6144
6136
6132
CONTROL SIGNAL GENERATOR
0°
90°
I
Q
6108
6124
6130
6128
2646
MODULATOR 2604a
MODULATOR 2604b
CONTROL SIGNAL GENERATOR
5318a
5318b
6134
2645
6106
6122
6126
2642b
6142
5308a
5308b
LPF
LPF
6104
6120
6138
CODE GENERATOR Q
6142
5304a
5304b
I AMPLITUDE SHAPER
Q AMPLITUDE SHAPER
I
Q
I DATA SIGNAL 6102
Q DATA SIGNAL 6118

FIG.61

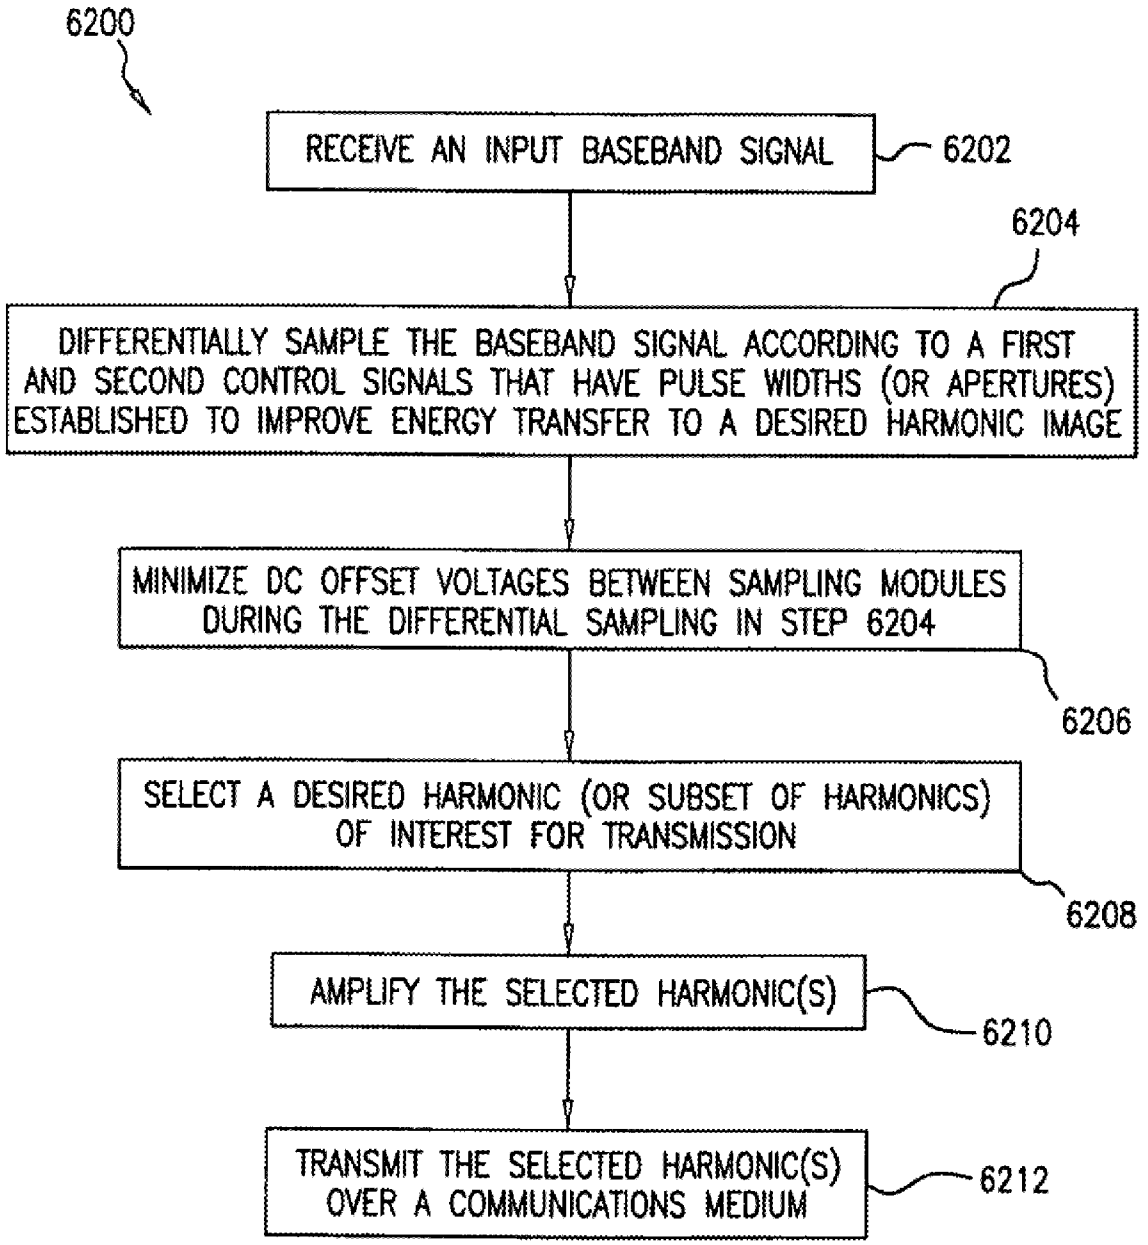

6200
RECEIVE AN INPUT BASEBAND SIGNAL
6202
6204
DIFFERENTIALLY SAMPLE THE BASEBAND SIGNAL ACCORDING TO A FIRST AND SECOND CONTROL SIGNALS THAT HAVE PULSE WIDTHS (OR APERTURES) ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE
MINIMIZE DC OFFSET VOLTAGES BETWEEN SAMPLING MODULES DURING THE DIFFERENTIAL SAMPLING IN STEP 6204
6206
SELECT A DESIRED HARMONIC (OR SUBSET OF HARMONICS) OF INTEREST FOR TRANSMISSION
6208
AMPLIFY THE SELECTED HARMONIC(S)
6210
TRANSMIT THE SELECTED HARMONIC(S) OVER A COMMUNICATIONS MEDIUM
6212

FIG.62

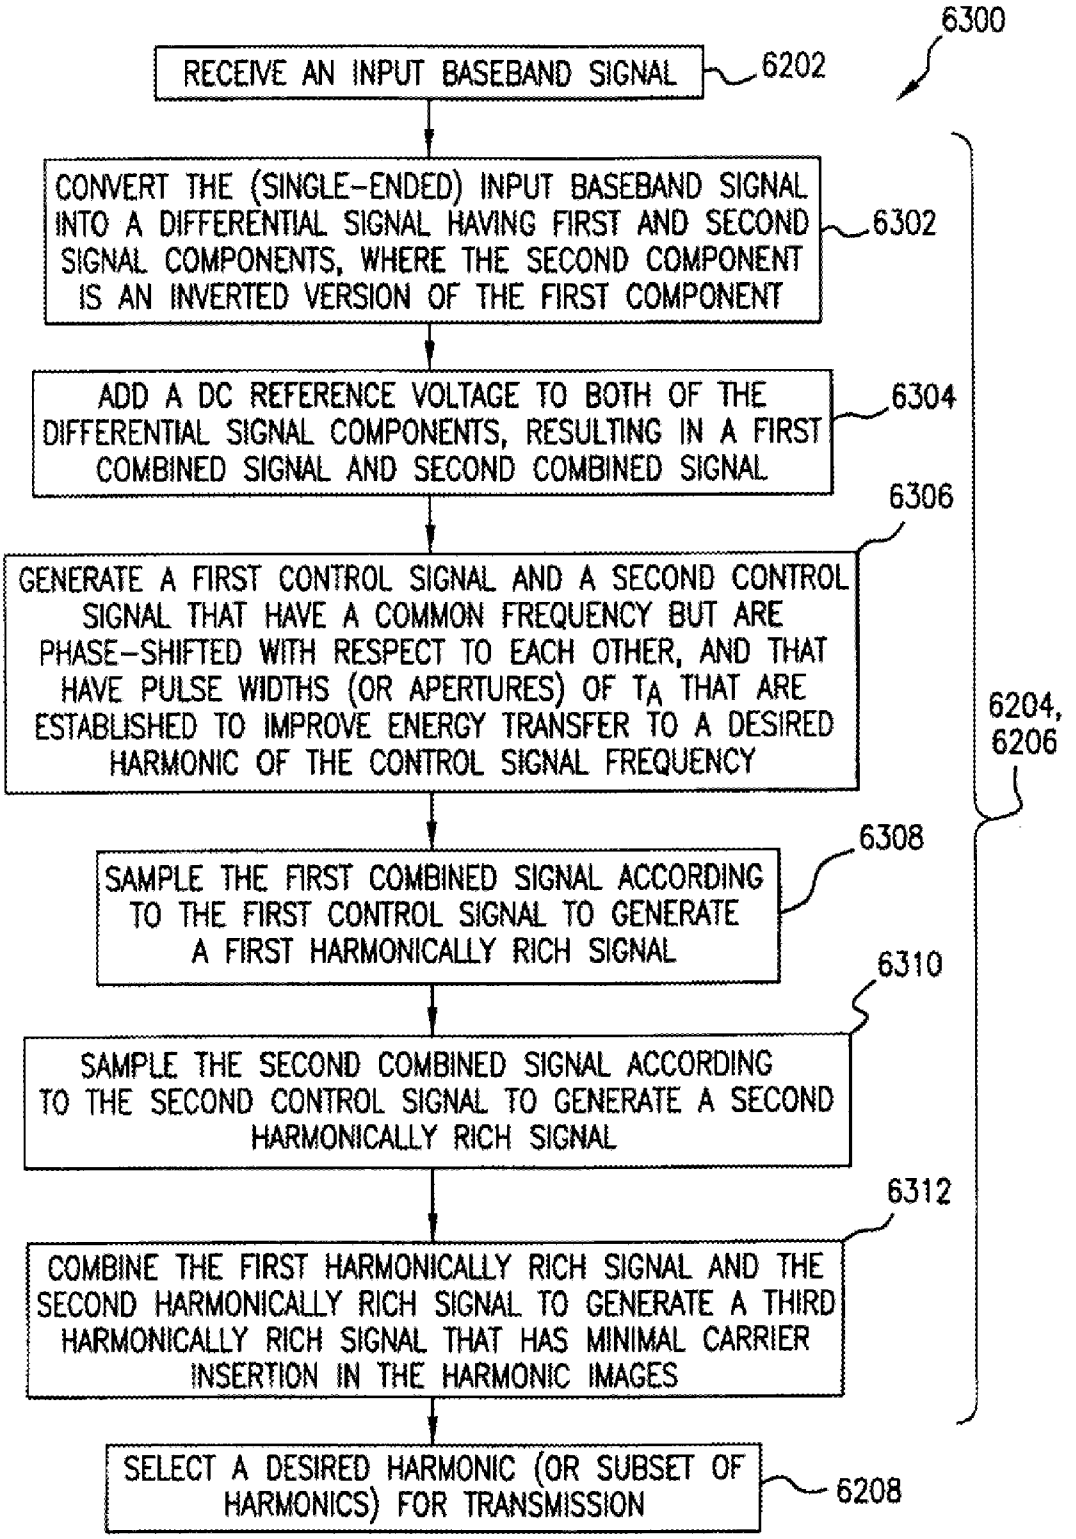

6300
RECEIVE AN INPUT BASEBAND SIGNAL
6202
CONVERT THE (SINGLE-ENDED) INPUT BASEBAND SIGNAL INTO A DIFFERENTIAL SIGNAL HAVING FIRST AND SECOND SIGNAL COMPONENTS, WHERE THE SECOND COMPONENT IS AN INVERTED VERSION OF THE FIRST COMPONENT
6302
ADD A DC REFERENCE VOLTAGE TO BOTH OF THE DIFFERENTIAL SIGNAL COMPONENTS, RESULTING IN A FIRST COMBINED SIGNAL AND SECOND COMBINED SIGNAL
6304
6306
GENERATE A FIRST CONTROL SIGNAL AND A SECOND CONTROL SIGNAL THAT HAVE A COMMON FREQUENCY BUT ARE PHASE-SHIFTED WITH RESPECT TO EACH OTHER, AND THAT HAVE PULSE WIDTHS (OR APERTURES) OF T_A THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC OF THE CONTROL SIGNAL FREQUENCY
6204, 6206
SAMPLE THE FIRST COMBINED SIGNAL ACCORDING TO THE FIRST CONTROL SIGNAL TO GENERATE A FIRST HARMONICALLY RICH SIGNAL
6308
6310
SAMPLE THE SECOND COMBINED SIGNAL ACCORDING TO THE SECOND CONTROL SIGNAL TO GENERATE A SECOND HARMONICALLY RICH SIGNAL
6312
COMBINE THE FIRST HARMONICALLY RICH SIGNAL AND THE SECOND HARMONICALLY RICH SIGNAL TO GENERATE A THIRD HARMONICALLY RICH SIGNAL THAT HAS MINIMAL CARRIER INSERTION IN THE HARMONIC IMAGES
SELECT A DESIRED HARMONIC (OR SUBSET OF HARMONICS) FOR TRANSMISSION
6208

FIG.63

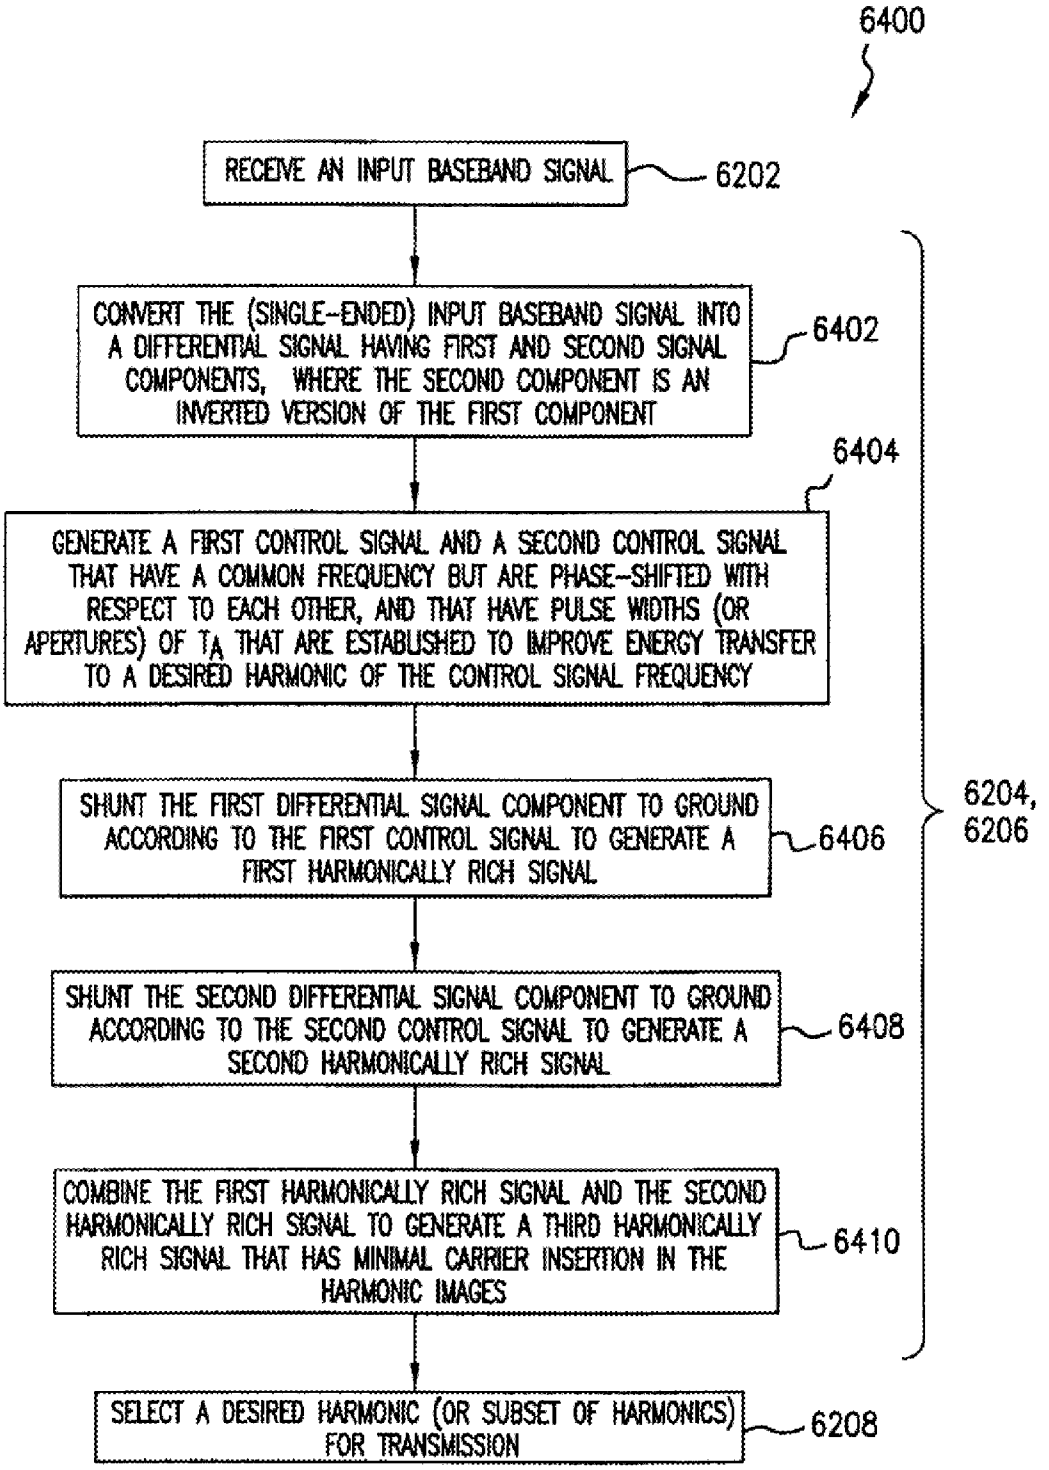

6400
RECEIVE AN INPUT BASEBAND SIGNAL
6202
CONVERT THE (SINGLE-ENDED) INPUT BASEBAND SIGNAL INTO A DIFFERENTIAL SIGNAL HAVING FIRST AND SECOND SIGNAL COMPONENTS, WHERE THE SECOND COMPONENT IS AN INVERTED VERSION OF THE FIRST COMPONENT
6402
6404
GENERATE A FIRST CONTROL SIGNAL AND A SECOND CONTROL SIGNAL THAT HAVE A COMMON FREQUENCY BUT ARE PHASE-SHIFTED WITH RESPECT TO EACH OTHER, AND THAT HAVE PULSE WIDTHS (OR APERTURES) OF T_A THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC OF THE CONTROL SIGNAL FREQUENCY
SHUNT THE FIRST DIFFERENTIAL SIGNAL COMPONENT TO GROUND ACCORDING TO THE FIRST CONTROL SIGNAL TO GENERATE A FIRST HARMONICALLY RICH SIGNAL
6406
SHUNT THE SECOND DIFFERENTIAL SIGNAL COMPONENT TO GROUND ACCORDING TO THE SECOND CONTROL SIGNAL TO GENERATE A SECOND HARMONICALLY RICH SIGNAL
6408
COMBINE THE FIRST HARMONICALLY RICH SIGNAL AND THE SECOND HARMONICALLY RICH SIGNAL TO GENERATE A THIRD HARMONICALLY RICH SIGNAL THAT HAS MINIMAL CARRIER INSERTION IN THE HARMONIC IMAGES
6410
6204, 6206
SELECT A DESIRED HARMONIC (OR SUBSET OF HARMONICS) FOR TRANSMISSION
6208

FIG.64

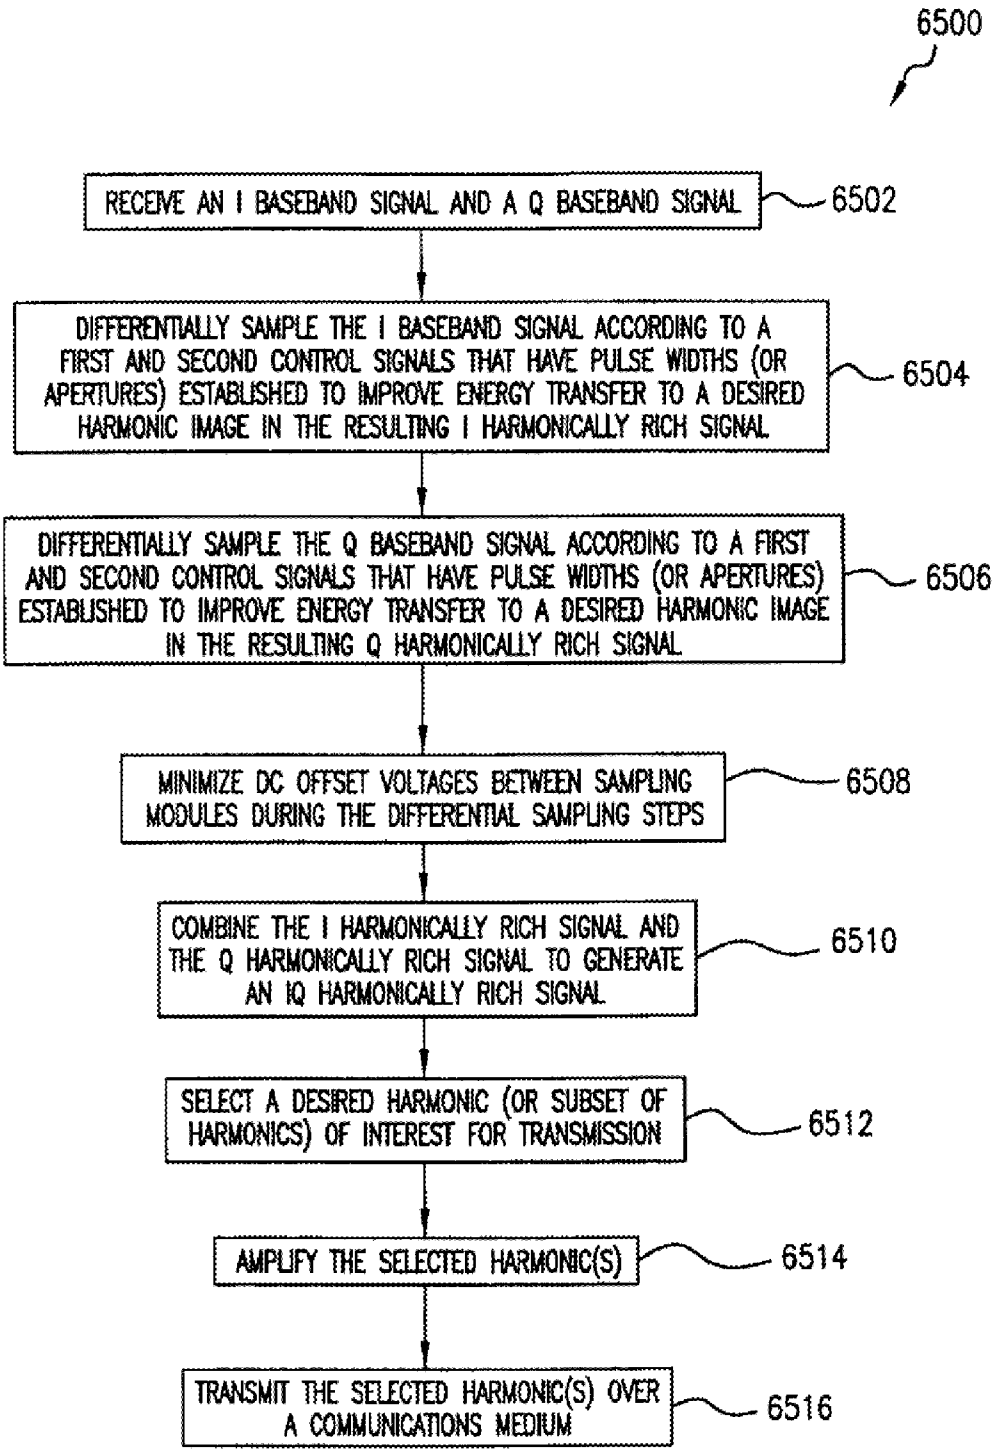

6500
RECEIVE AN I BASEBAND SIGNAL AND A Q BASEBAND SIGNAL
6502
DIFFERENTIALLY SAMPLE THE I BASEBAND SIGNAL ACCORDING TO A FIRST AND SECOND CONTROL SIGNALS THAT HAVE PULSE WIDTHS (OR APERTURES) ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE IN THE RESULTING I HARMONICALLY RICH SIGNAL
6504
DIFFERENTIALLY SAMPLE THE Q BASEBAND SIGNAL ACCORDING TO A FIRST AND SECOND CONTROL SIGNALS THAT HAVE PULSE WIDTHS (OR APERTURES) ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE IN THE RESULTING Q HARMONICALLY RICH SIGNAL
6506
MINIMIZE DC OFFSET VOLTAGES BETWEEN SAMPLING MODULES DURING THE DIFFERENTIAL SAMPLING STEPS
6508
COMBINE THE I HARMONICALLY RICH SIGNAL AND THE Q HARMONICALLY RICH SIGNAL TO GENERATE AN IQ HARMONICALLY RICH SIGNAL
6510
SELECT A DESIRED HARMONIC (OR SUBSET OF HARMONICS) OF INTEREST FOR TRANSMISSION
6512
AMPLIFY THE SELECTED HARMONIC(S)
6514
TRANSMIT THE SELECTED HARMONIC(S) OVER A COMMUNICATIONS MEDIUM
6516

FIG.65

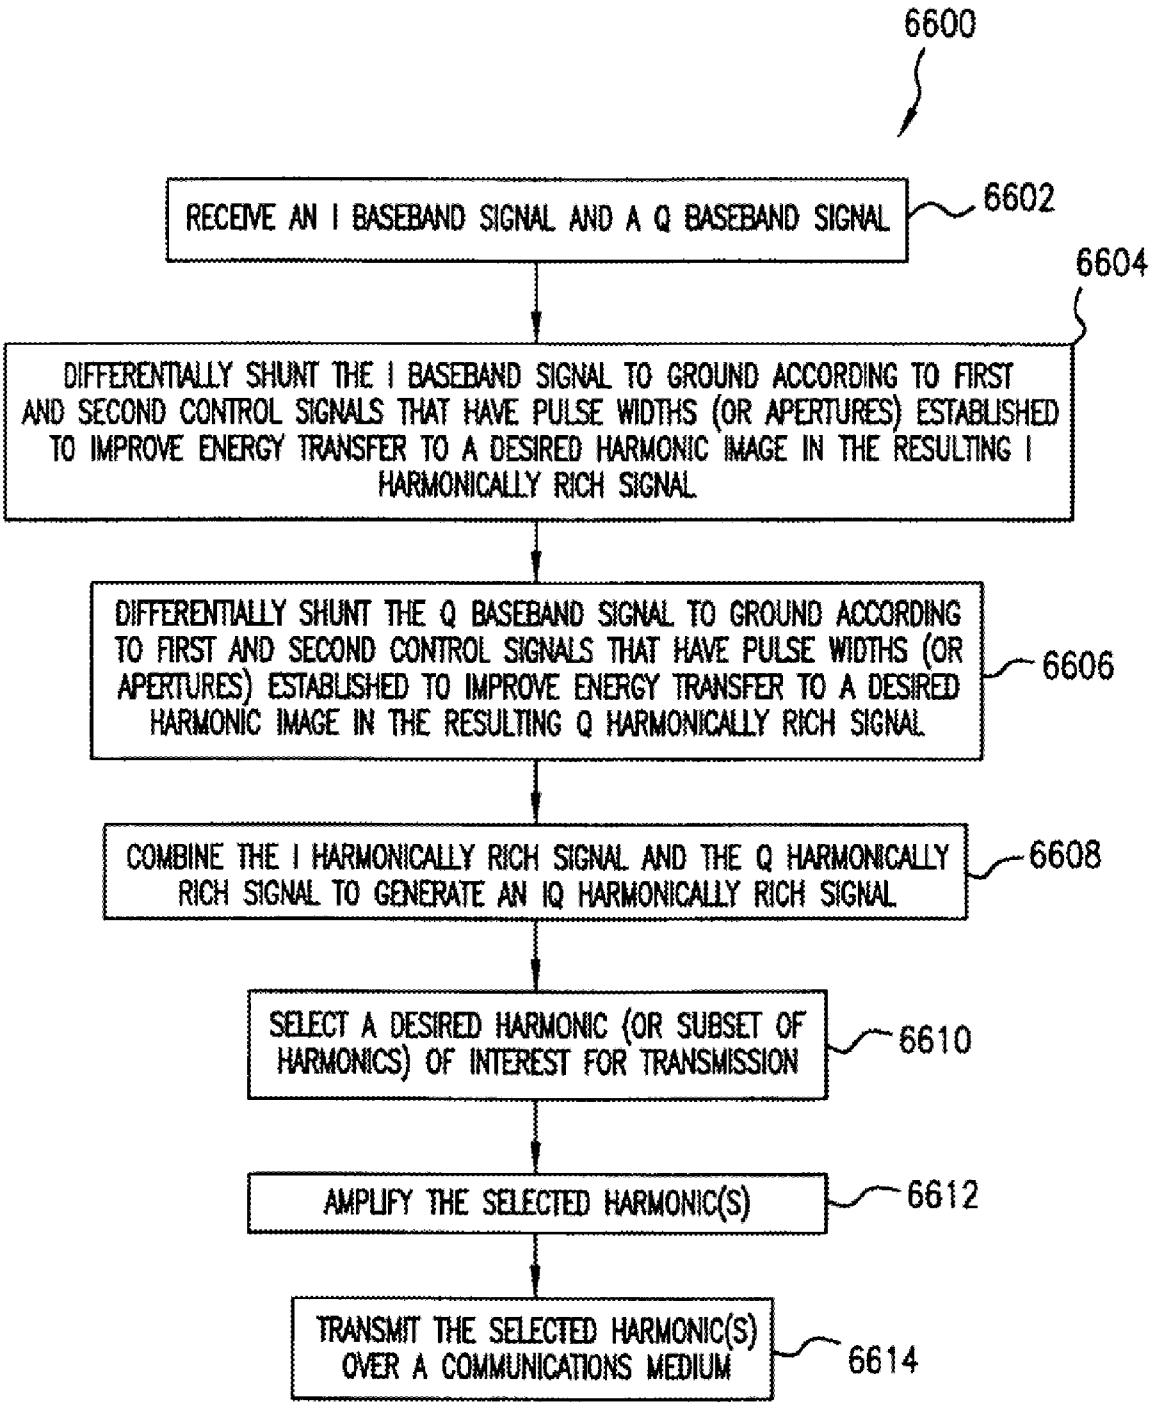

6600
RECEIVE AN I BASEBAND SIGNAL AND A Q BASEBAND SIGNAL
6602
6604
DIFFERENTIALLY SHUNT THE I BASEBAND SIGNAL TO GROUND ACCORDING TO FIRST AND SECOND CONTROL SIGNALS THAT HAVE PULSE WIDTHS (OR APERTURES) ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE IN THE RESULTING I HARMONICALLY RICH SIGNAL
DIFFERENTIALLY SHUNT THE Q BASEBAND SIGNAL TO GROUND ACCORDING TO FIRST AND SECOND CONTROL SIGNALS THAT HAVE PULSE WIDTHS (OR APERTURES) ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE IN THE RESULTING Q HARMONICALLY RICH SIGNAL
6606
COMBINE THE I HARMONICALLY RICH SIGNAL AND THE Q HARMONICALLY RICH SIGNAL TO GENERATE AN IQ HARMONICALLY RICH SIGNAL
6608
SELECT A DESIRED HARMONIC (OR SUBSET OF HARMONICS) OF INTEREST FOR TRANSMISSION
6610
AMPLIFY THE SELECTED HARMONIC(S)
6612
TRANSMIT THE SELECTED HARMONIC(S) OVER A COMMUNICATIONS MEDIUM
6614

FIG.66

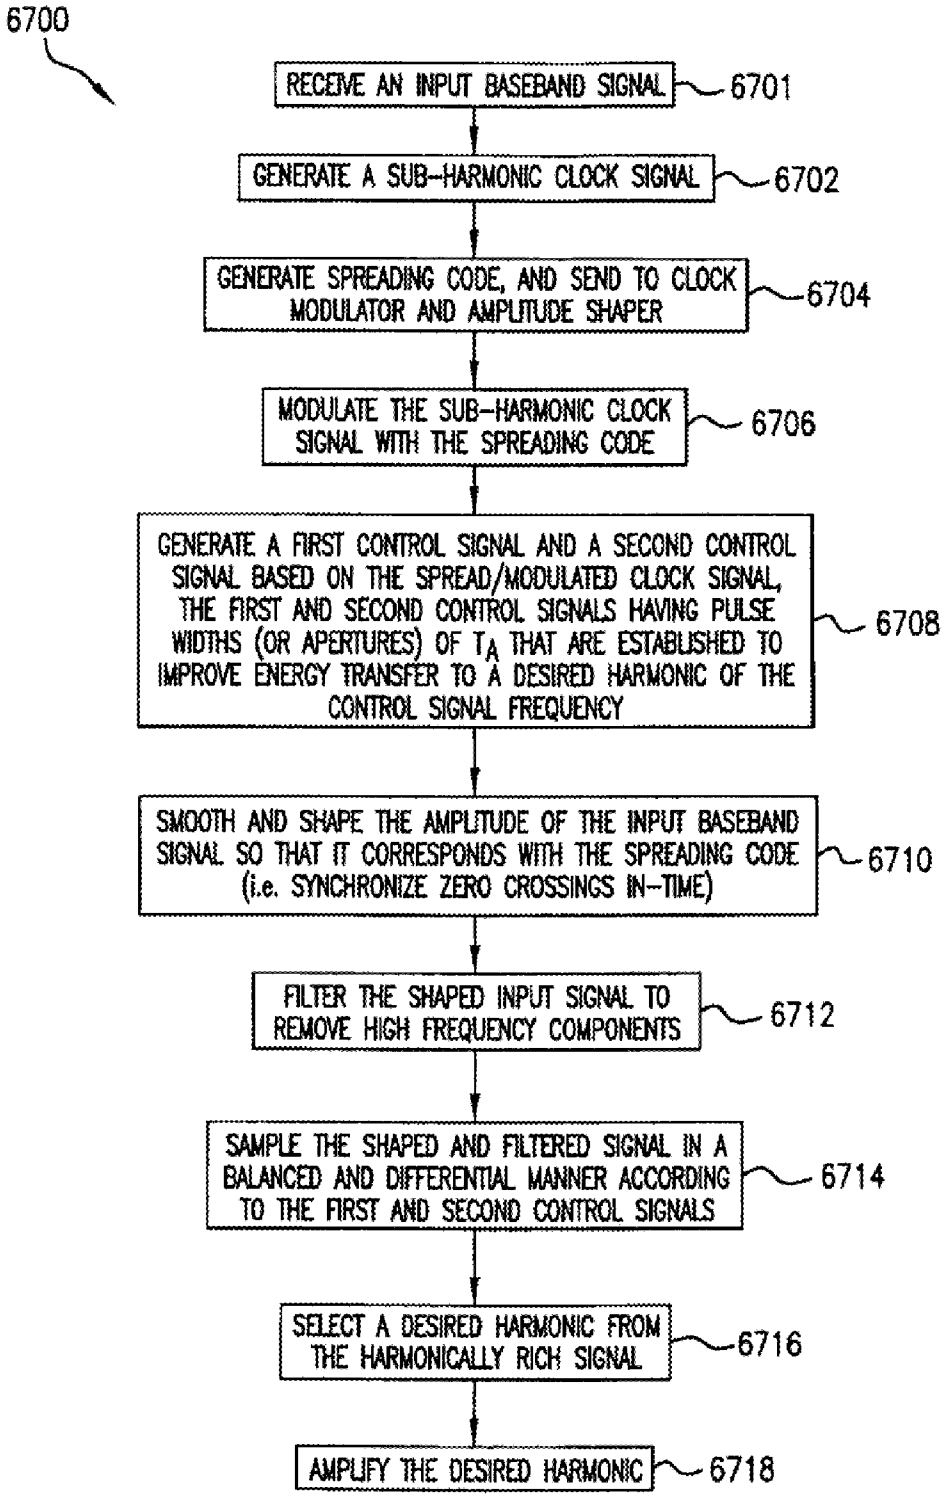

6700
RECEIVE AN INPUT BASEBAND SIGNAL
6701
GENERATE A SUB-HARMONIC CLOCK SIGNAL
6702
GENERATE SPREADING CODE, AND SEND TO CLOCK MODULATOR AND AMPLITUDE SHAPER
6704
MODULATE THE SUB-HARMONIC CLOCK SIGNAL WITH THE SPREADING CODE
6706
GENERATE A FIRST CONTROL SIGNAL AND A SECOND CONTROL SIGNAL BASED ON THE SPREAD/MODULATED CLOCK SIGNAL, THE FIRST AND SECOND CONTROL SIGNALS HAVING PULSE WIDTHS (OR APERTURES) OF T_A THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC OF THE CONTROL SIGNAL FREQUENCY
6708
SMOOTH AND SHAPE THE AMPLITUDE OF THE INPUT BASEBAND SIGNAL SO THAT IT CORRESPONDS WITH THE SPREADING CODE (i.e. SYNCHRONIZE ZERO CROSSINGS IN-TIME)
6710
FILTER THE SHAPED INPUT SIGNAL TO REMOVE HIGH FREQUENCY COMPONENTS
6712
SAMPLE THE SHAPED AND FILTERED SIGNAL IN A BALANCED AND DIFFERENTIAL MANNER ACCORDING TO THE FIRST AND SECOND CONTROL SIGNALS
6714
SELECT A DESIRED HARMONIC FROM THE HARMONICALLY RICH SIGNAL
6716
AMPLIFY THE DESIRED HARMONIC
6718

FIG.67

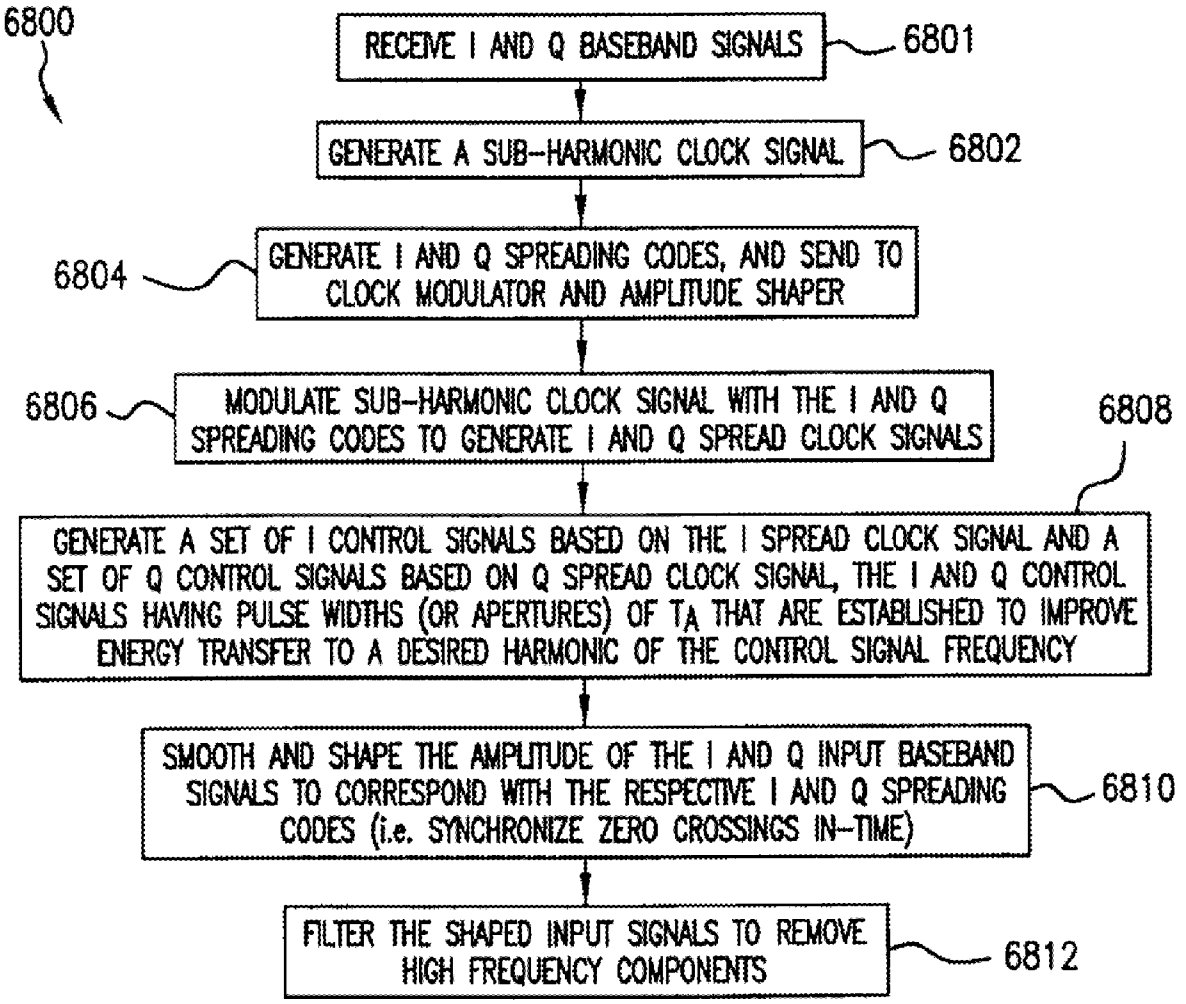

6800
RECEIVE I AND Q BASEBAND SIGNALS
6801
GENERATE A SUB-HARMONIC CLOCK SIGNAL
6802
6804
GENERATE I AND Q SPREADING CODES, AND SEND TO CLOCK MODULATOR AND AMPLITUDE SHAPER
6806
MODULATE SUB-HARMONIC CLOCK SIGNAL WITH THE I AND Q SPREADING CODES TO GENERATE I AND Q SPREAD CLOCK SIGNALS
6808
GENERATE A SET OF I CONTROL SIGNALS BASED ON THE I SPREAD CLOCK SIGNAL AND A SET OF Q CONTROL SIGNALS BASED ON Q SPREAD CLOCK SIGNAL, THE I AND Q CONTROL SIGNALS HAVING PULSE WIDTHS (OR APERTURES) OF T_A THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC OF THE CONTROL SIGNAL FREQUENCY
SMOOTH AND SHAPE THE AMPLITUDE OF THE I AND Q INPUT BASEBAND SIGNALS TO CORRESPOND WITH THE RESPECTIVE I AND Q SPREADING CODES (i.e. SYNCHRONIZE ZERO CROSSINGS IN-TIME)
6810
FILTER THE SHAPED INPUT SIGNALS TO REMOVE HIGH FREQUENCY COMPONENTS
6812

FIG.68A

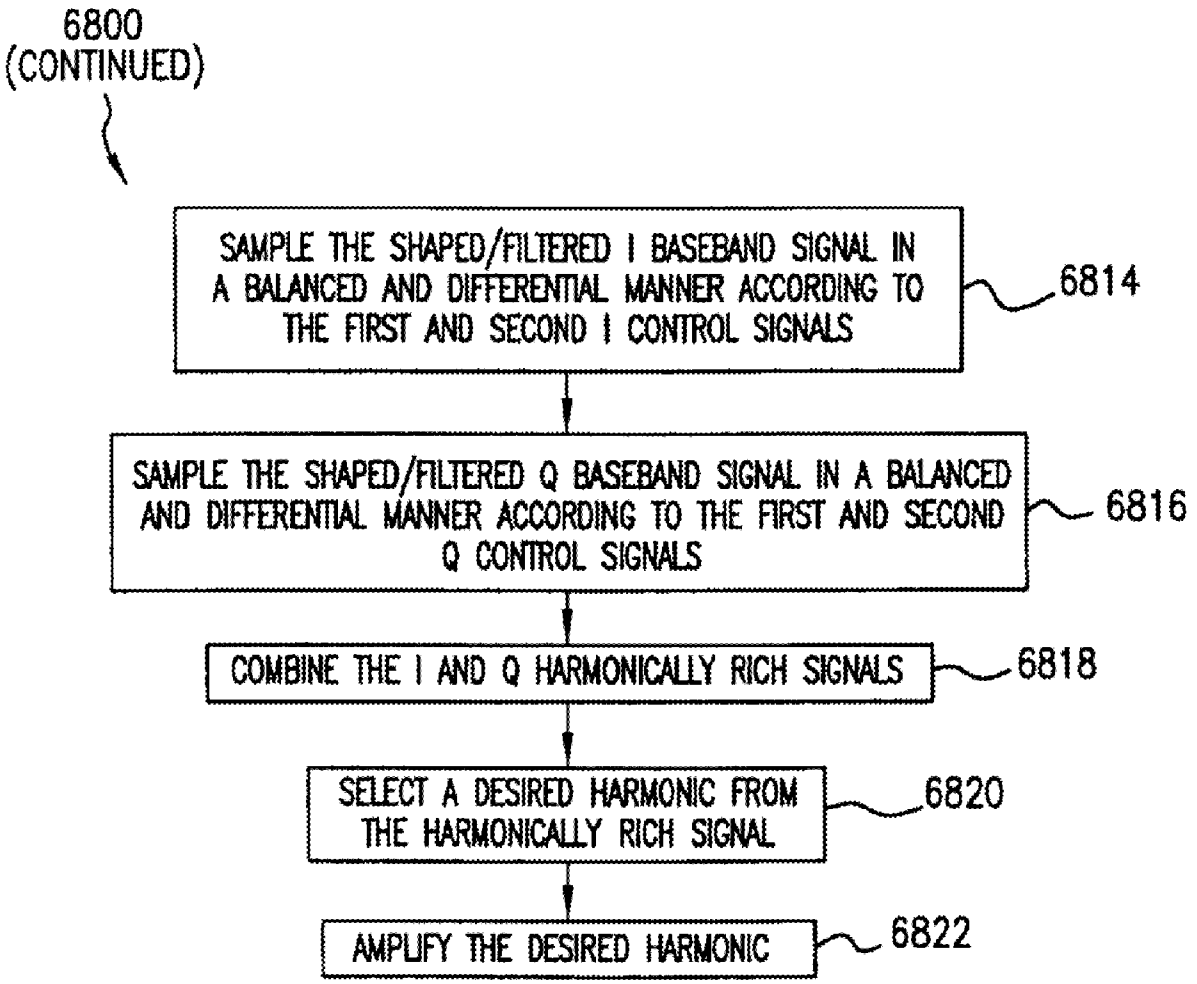

6800
(CONTINUED)
SAMPLE THE SHAPED/FILTERED I BASEBAND SIGNAL IN A BALANCED AND DIFFERENTIAL MANNER ACCORDING TO THE FIRST AND SECOND I CONTROL SIGNALS
6814
SAMPLE THE SHAPED/FILTERED Q BASEBAND SIGNAL IN A BALANCED AND DIFFERENTIAL MANNER ACCORDING TO THE FIRST AND SECOND Q CONTROL SIGNALS
6816
COMBINE THE I AND Q HARMONICALLY RICH SIGNALS
6818
SELECT A DESIRED HARMONIC FROM THE HARMONICALLY RICH SIGNAL
6820
AMPLIFY THE DESIRED HARMONIC
6822

FIG.68B

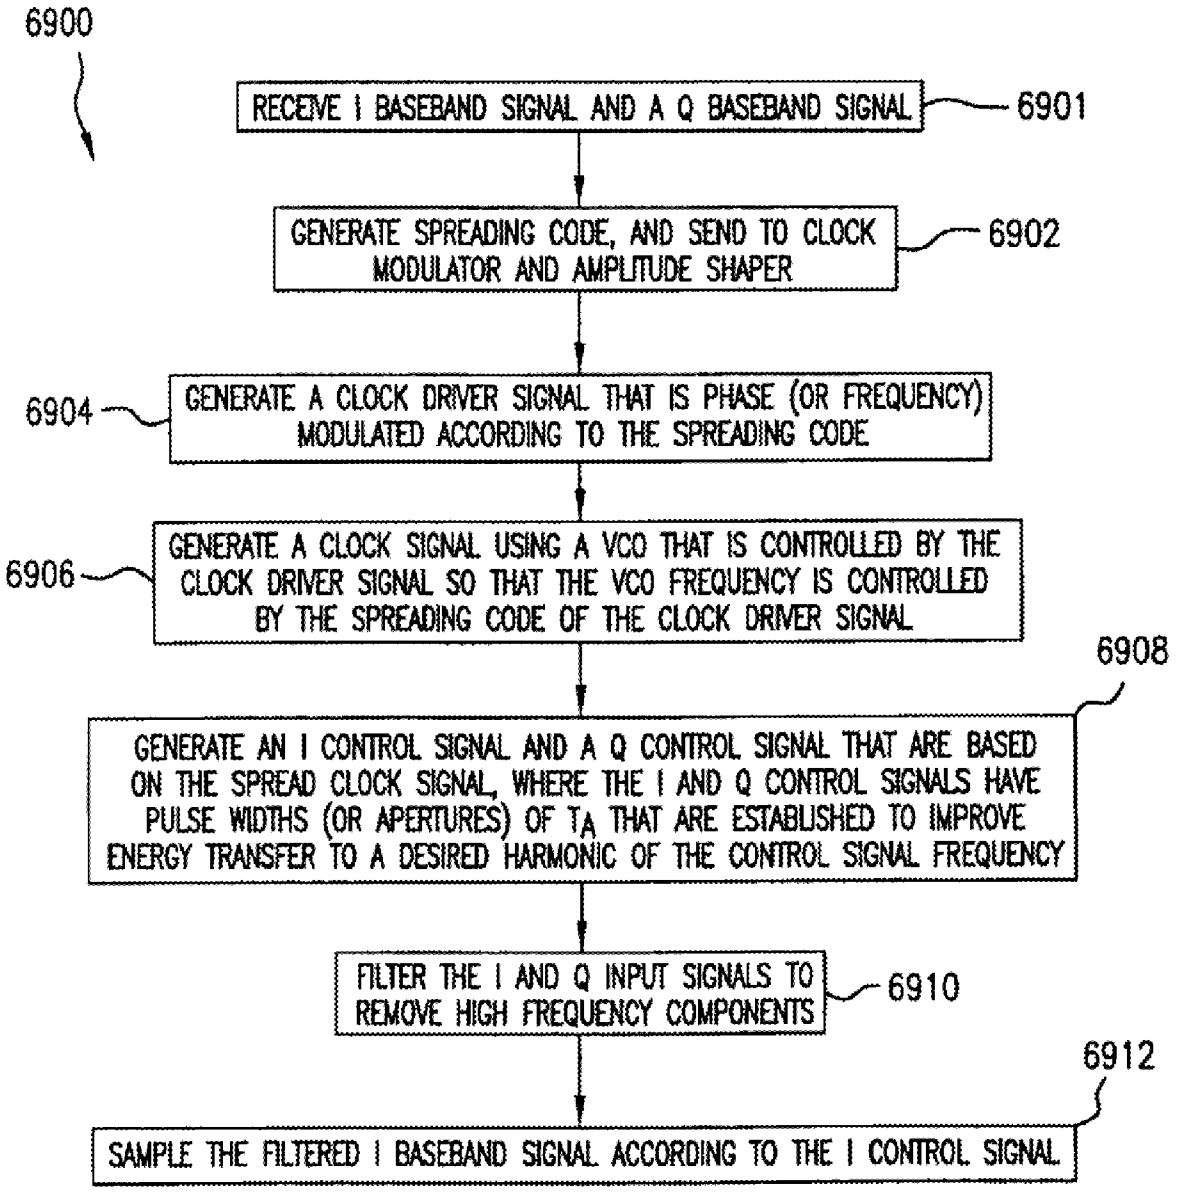

6900
RECEIVE I BASEBAND SIGNAL AND A Q BASEBAND SIGNAL
6901
GENERATE SPREADING CODE, AND SEND TO CLOCK MODULATOR AND AMPLITUDE SHAPER
6902
6904
GENERATE A CLOCK DRIVER SIGNAL THAT IS PHASE (OR FREQUENCY) MODULATED ACCORDING TO THE SPREADING CODE
6906
GENERATE A CLOCK SIGNAL USING A VCO THAT IS CONTROLLED BY THE CLOCK DRIVER SIGNAL SO THAT THE VCO FREQUENCY IS CONTROLLED BY THE SPREADING CODE OF THE CLOCK DRIVER SIGNAL
6908
GENERATE AN I CONTROL SIGNAL AND A Q CONTROL SIGNAL THAT ARE BASED ON THE SPREAD CLOCK SIGNAL, WHERE THE I AND Q CONTROL SIGNALS HAVE PULSE WIDTHS (OR APERTURES) OF T_A THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC OF THE CONTROL SIGNAL FREQUENCY
FILTER THE I AND Q INPUT SIGNALS TO REMOVE HIGH FREQUENCY COMPONENTS
6910
6912
SAMPLE THE FILTERED I BASEBAND SIGNAL ACCORDING TO THE I CONTROL SIGNAL

FIG.69A

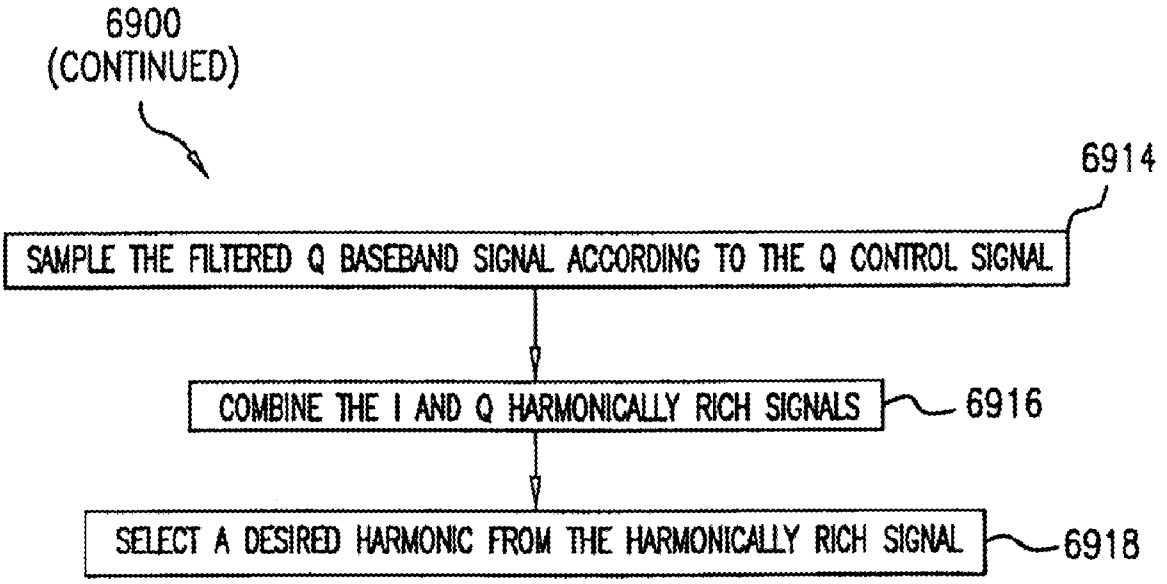

6900
(CONTINUED)
6914
SAMPLE THE FILTERED Q BASEBAND SIGNAL ACCORDING TO THE Q CONTROL SIGNAL
COMBINE THE I AND Q HARMONICALLY RICH SIGNALS
6916
SELECT A DESIRED HARMONIC FROM THE HARMONICALLY RICH SIGNAL
6918

FIG.69B

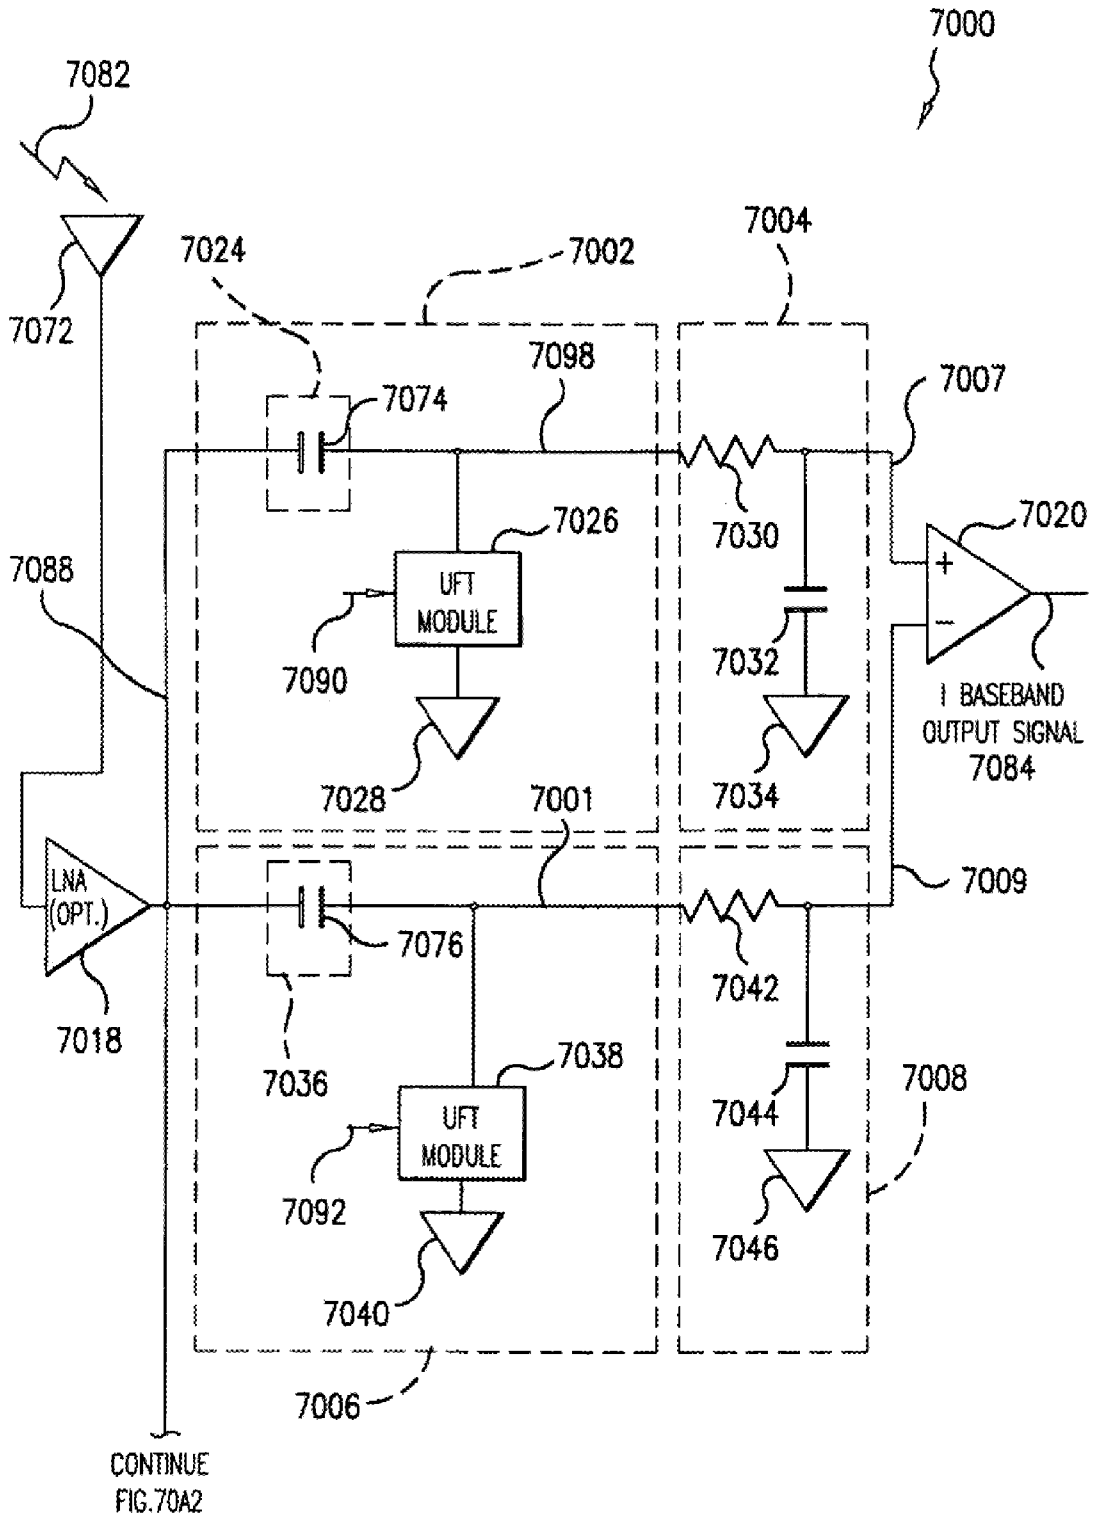

7000
7082
7072
7024
7002
7004
7074
7098
7007
7026
7030
7020
7088
UFT MODULE
7090
7032
I BASEBAND OUTPUT SIGNAL 7084
7028
7001
7034
LNA (OPT.)
7009
7076
7042
7018
7036
7038
7008
7044
UFT MODULE
7092
7046
7040
7006
CONTINUE FIG.70A2

FIG.70A1

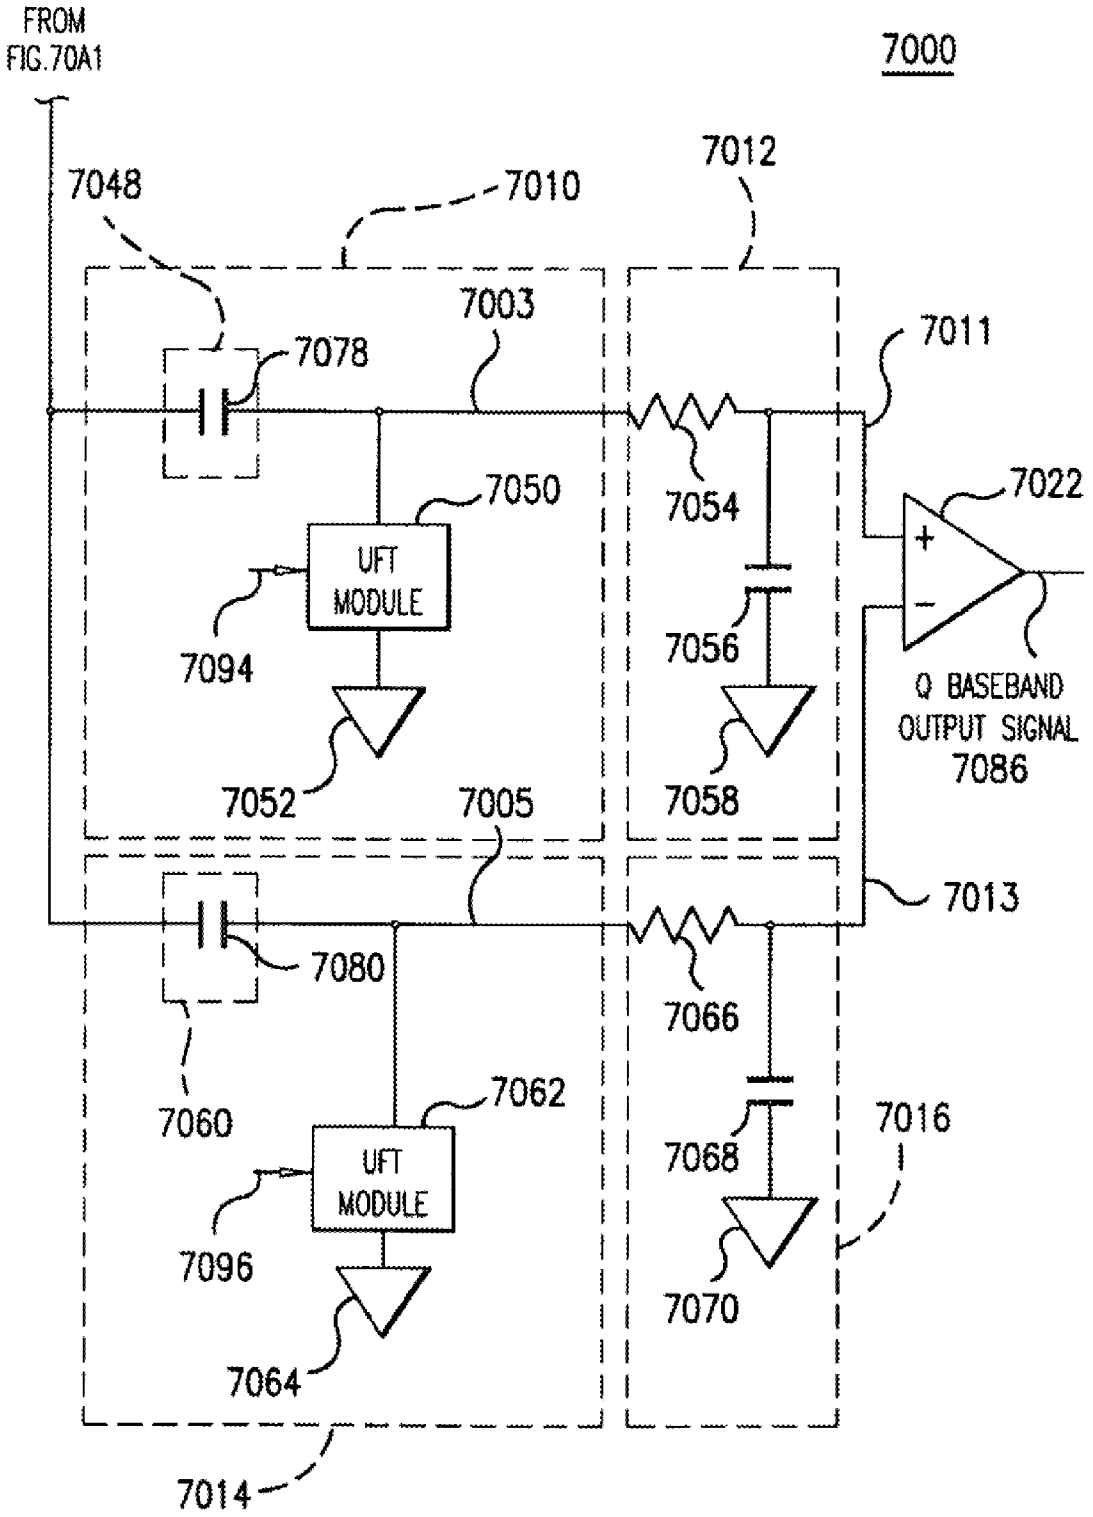

FROM FIG.70A1
7000
7048
7010
7012
7003
7078
7011
7050
7054
7022
UFT MODULE
7094
7056
Q BASEBAND OUTPUT SIGNAL 7086
7052
7005
7058
7013
7080
7066
7062
7060
7016
7068
UFT MODULE
7096
7070
7064
7014

FIG.70A2

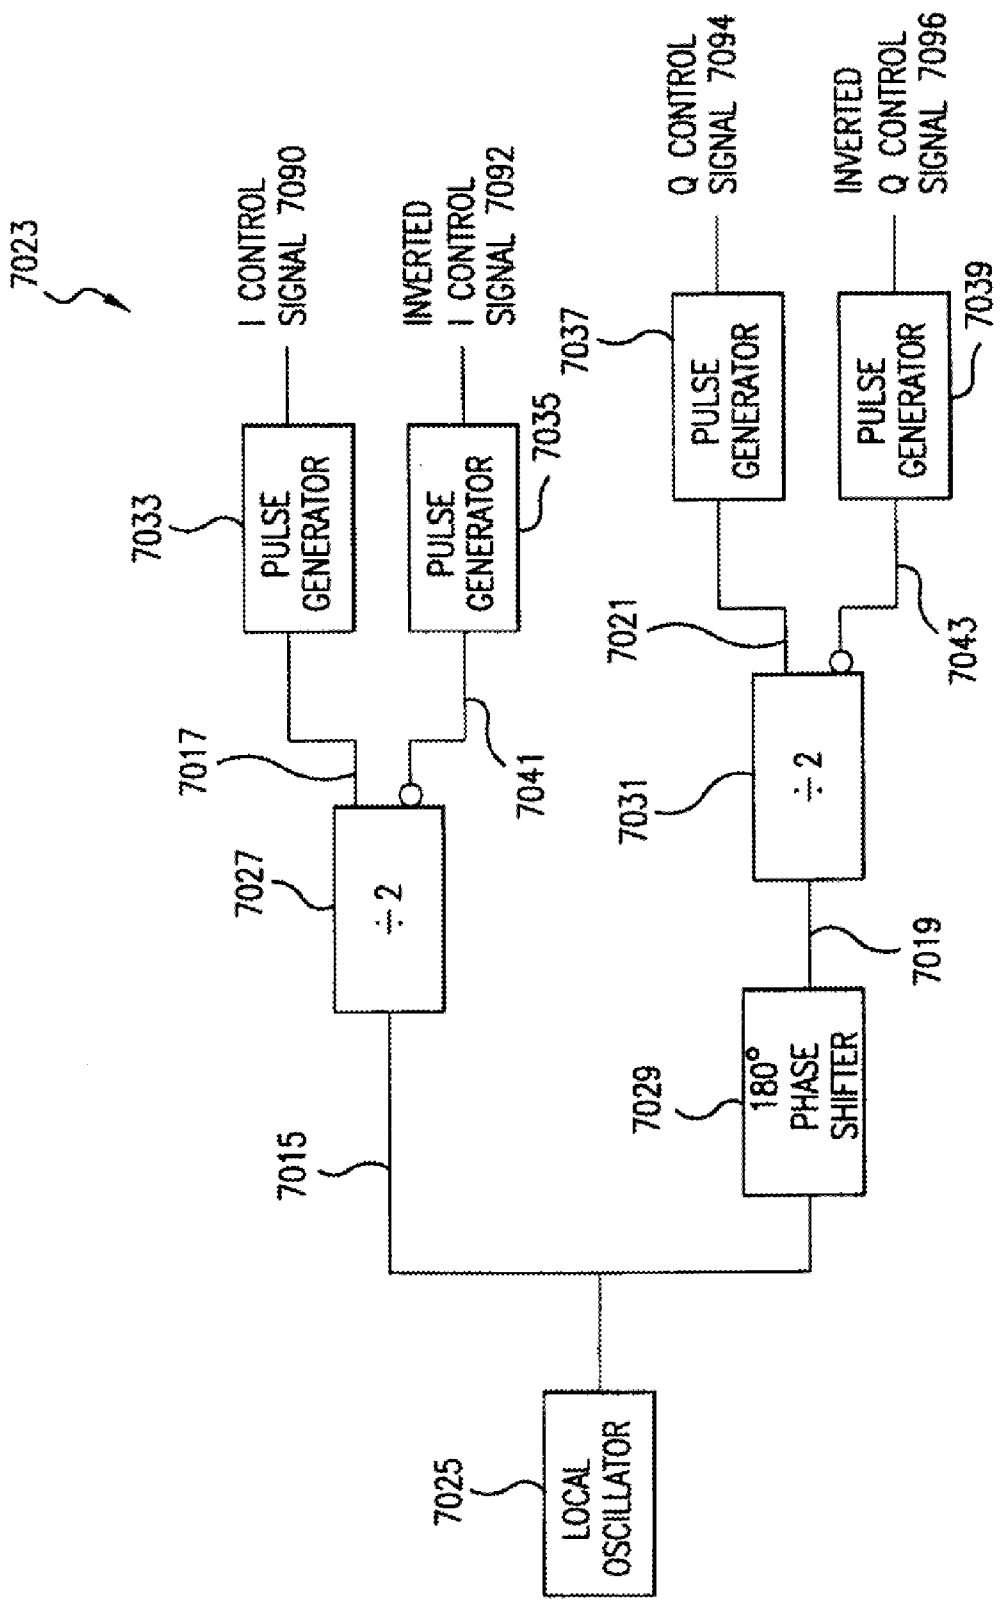

7023
I CONTROL SIGNAL 7090
INVERTED I CONTROL SIGNAL 7092
Q CONTROL SIGNAL 7094
INVERTED Q CONTROL SIGNAL 7096
7033
PULSE GENERATOR
7035
PULSE GENERATOR
7037
PULSE GENERATOR
7039
PULSE GENERATOR
7017
7041
7021
7043
7027
÷ 2
7031
÷ 2
7019
7029
180° PHASE SHIFTER
7015
7025
LOCAL OSCILLATOR

FIG.70B

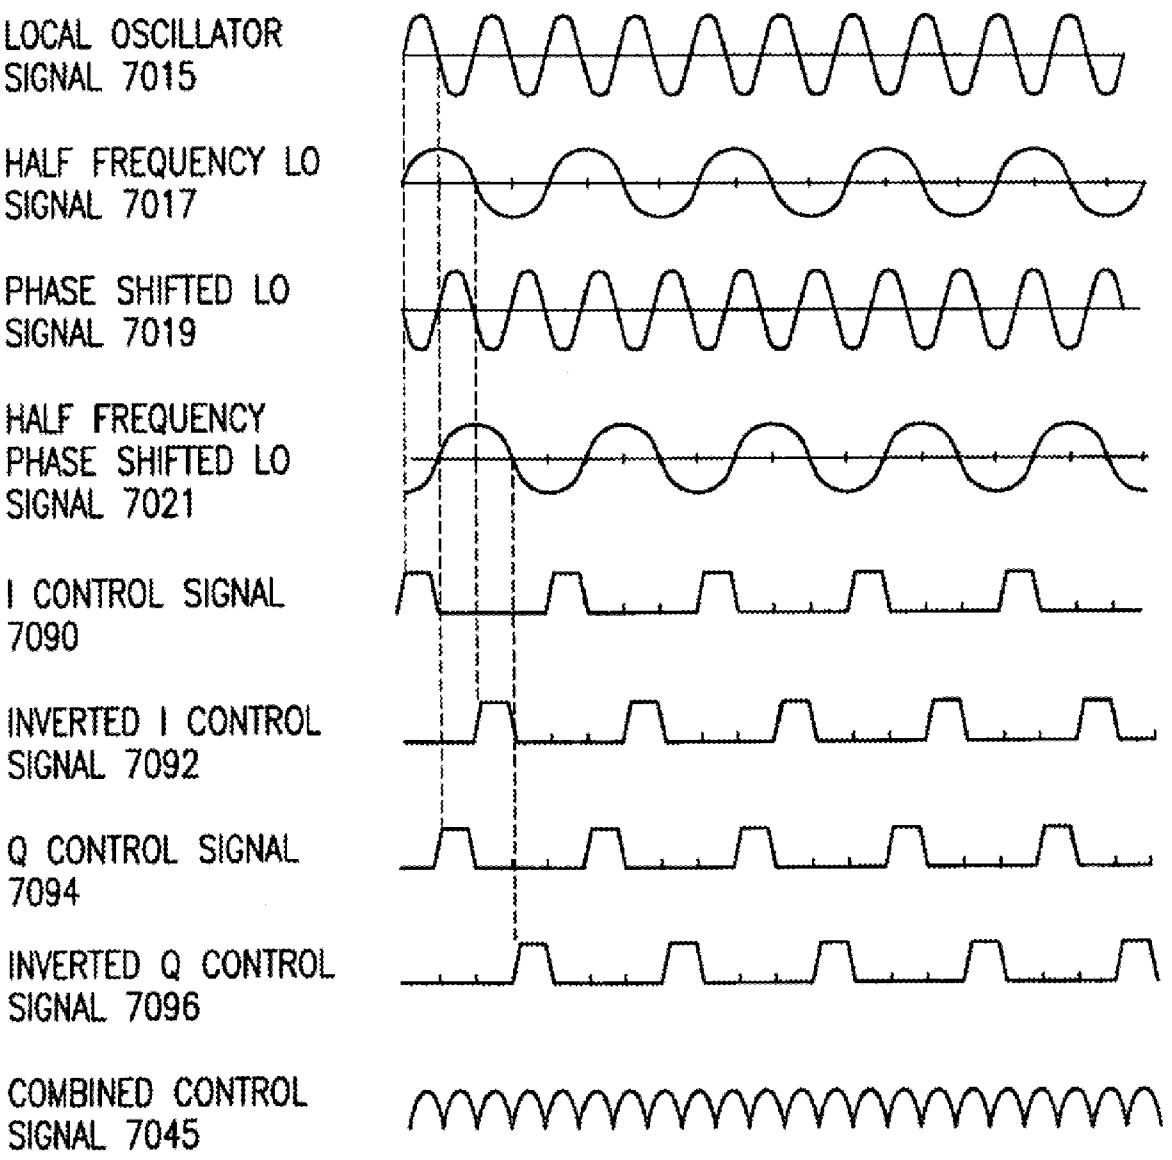

LOCAL OSCILLATOR SIGNAL 7015
HALF FREQUENCY LO SIGNAL 7017
PHASE SHIFTED LO SIGNAL 7019
HALF FREQUENCY PHASE SHIFTED LO SIGNAL 7021
I CONTROL SIGNAL 7090
INVERTED I CONTROL SIGNAL 7092
Q CONTROL SIGNAL 7094
INVERTED Q CONTROL SIGNAL 7096
COMBINED CONTROL SIGNAL 7045

FIG.70C

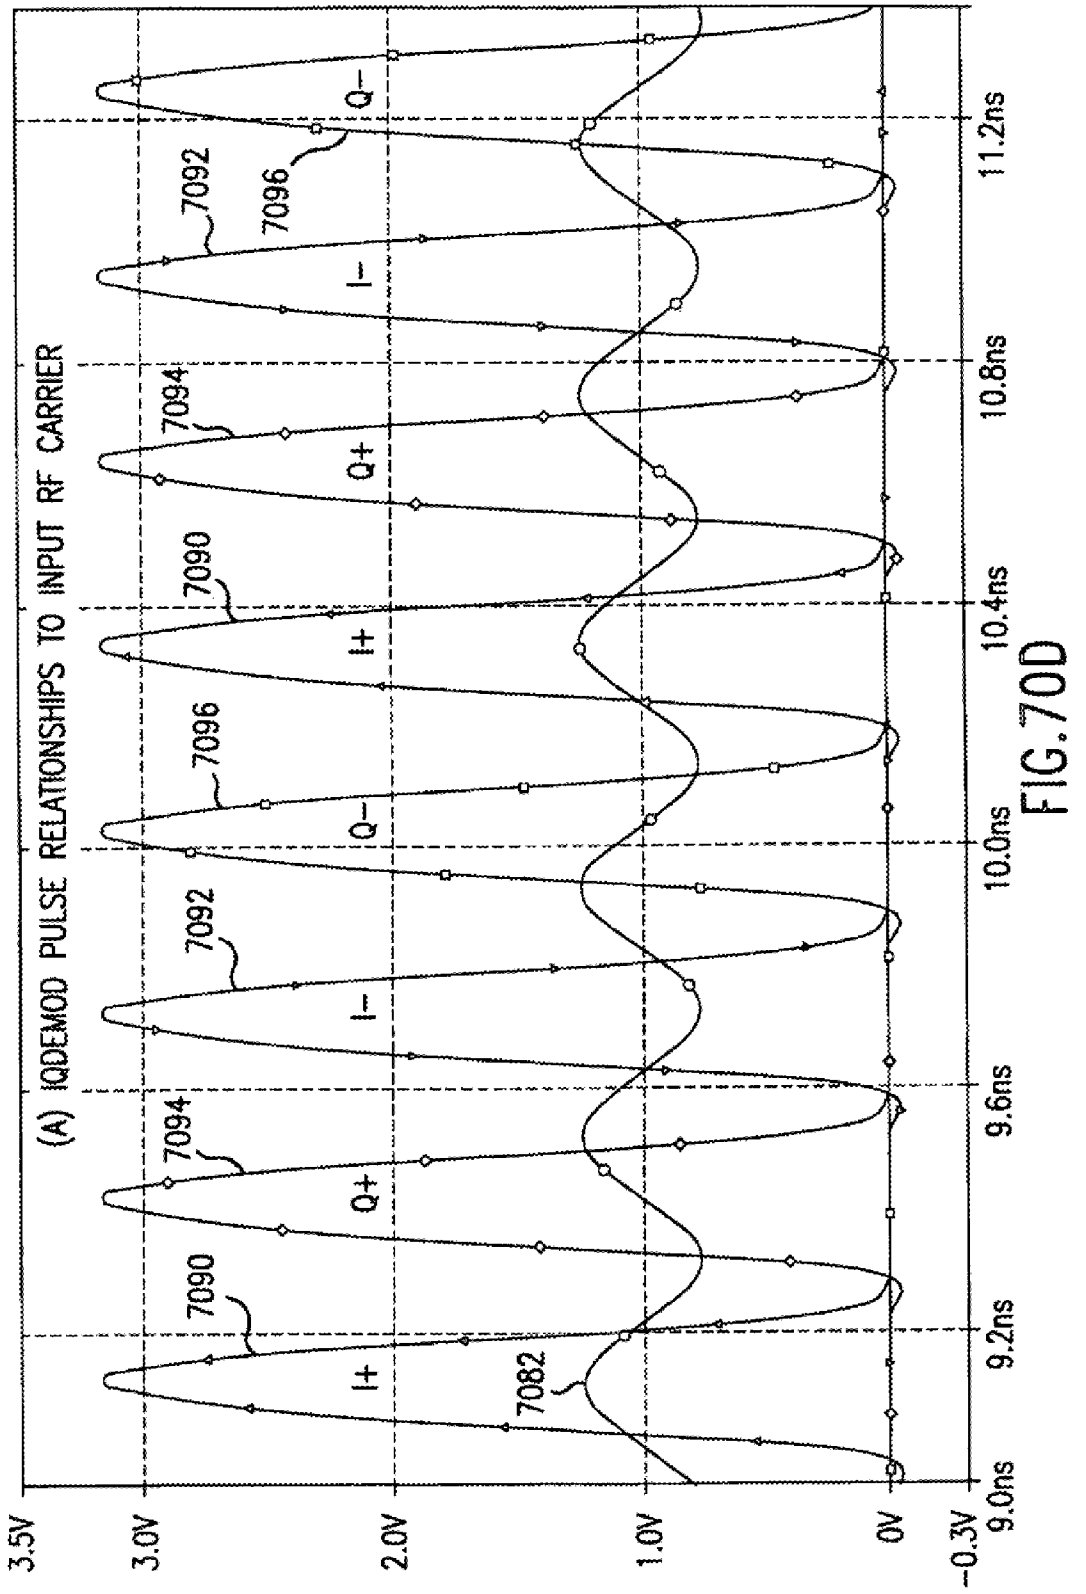

(A) IQDEMOD PULSE RELATIONSHIPS TO INPUT RF CARRIER
3.5V
3.0V
2.0V
1.0V
0V
-0.3V
9.0ns
9.2ns
9.6ns
10.0ns
10.4ns
10.8ns
11.2ns
7090
7092
7094
7096
7082
I+
I-
Q+
Q-

FIG. 70D

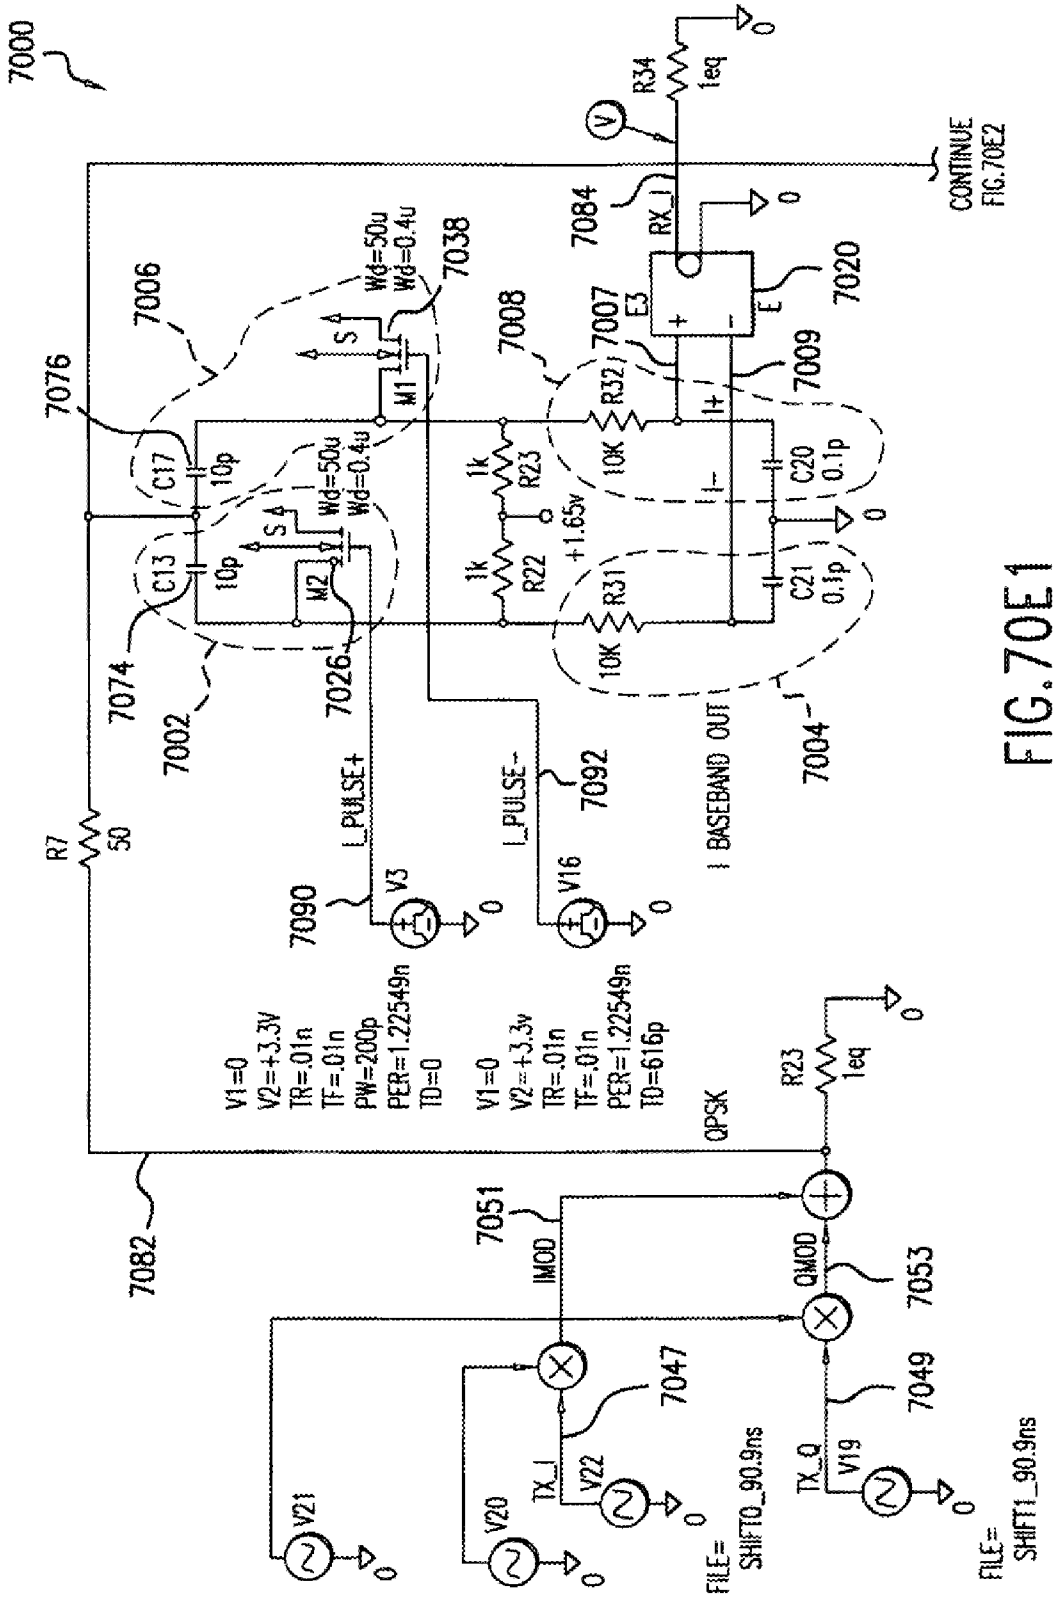

7000
R34
1eq
CONTINUE
FIG.70E2
7084
RX_I
7020
E3
7007
7008
7009
7006
7038
Wd=50u
Wd=0.4u
M1
S
7076
C17
10p
R32
10K
R23
1k
C20
0.1p
C13
10p
M2
R22
1k
+1.65v
R31
10K
C21
0.1p
7074
7026
7002
7004
I BASEBAND OUT
R7
50
L_PULSE+
L_PULSE-
7092
7090
V3
V16
V1=0
V2=+3.3V
TR=.01n
TF=.01n
PW=200p
PER=1.22549n
TD=0
V1=0
V2=+3.3v
TR=.01n
TF=.01n
PER=1.22549n
TD=616p
QPSK
R23
1eq
7082
7051
IMOD
QMOD
7053
7047
7049
V21
V20
TX_I
V22
TX_Q
V19
FILE=
SHIFT0_90.9ns
FILE=
SHIFT1_90.9ns

FIG.70E1

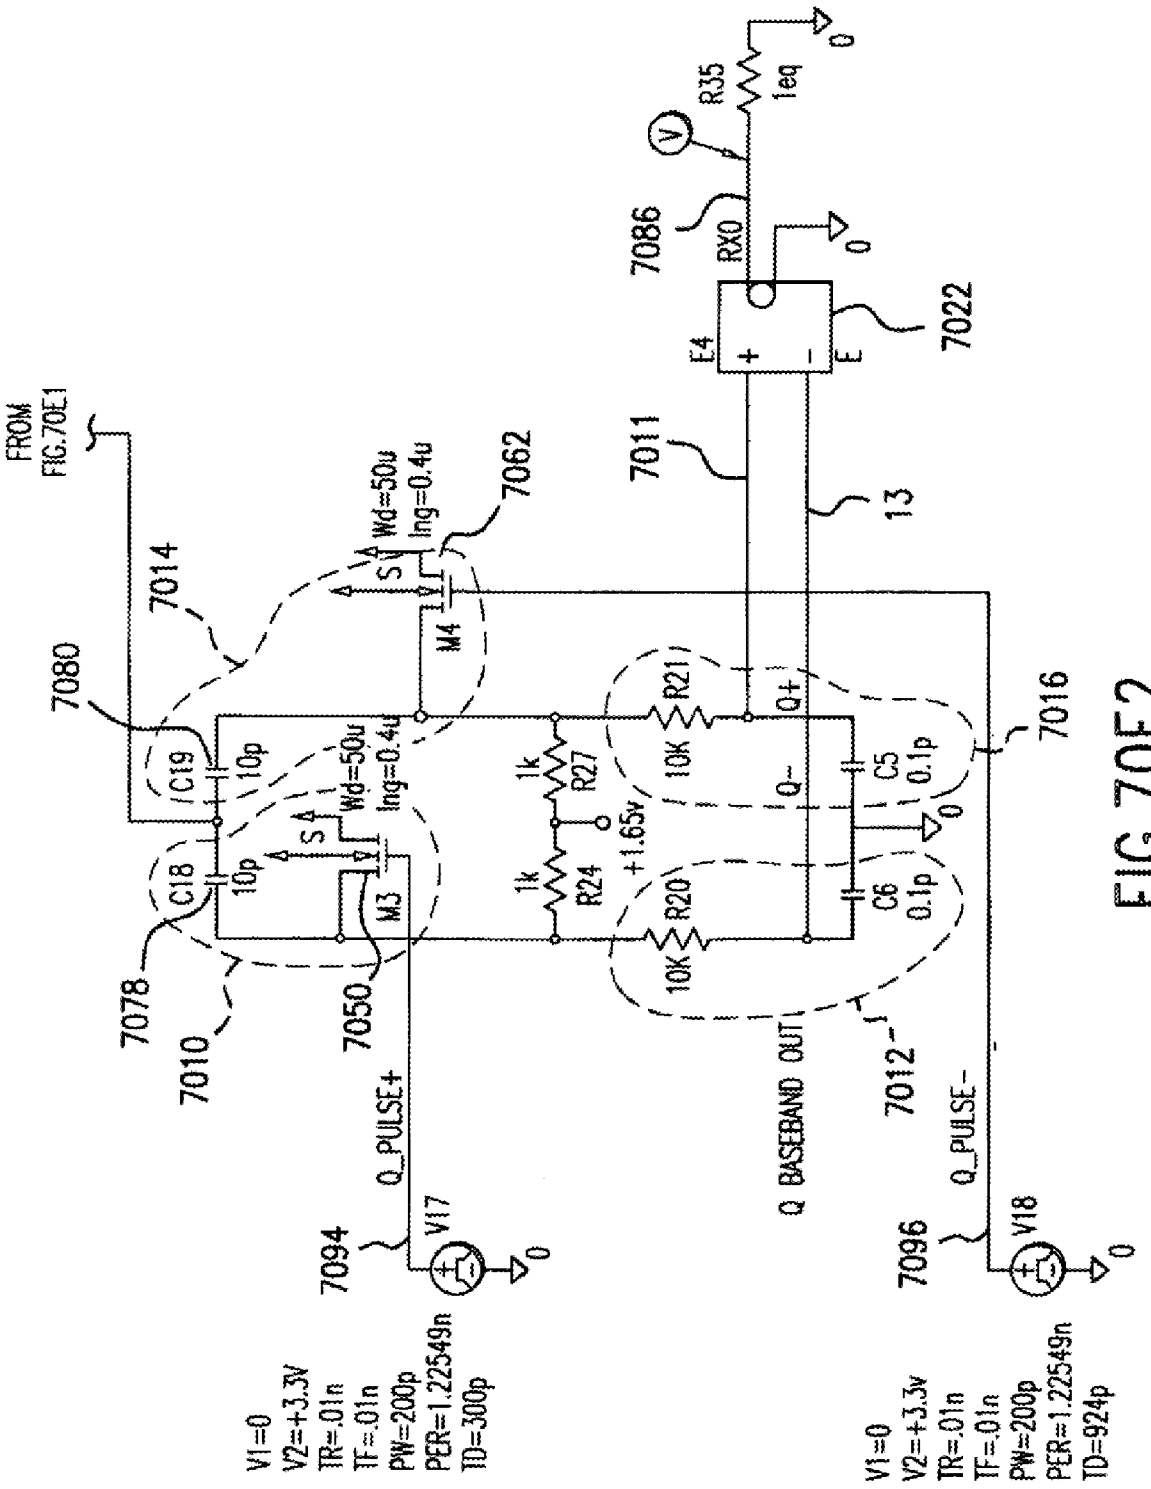

FROM FIG.70E1
7014
7080
7078
7010
7050
7062
7011
7086
7022
7016
7012
7094
7096
C19
10p
C18
10p
M3
M4
Wd=50u
lng=0.4u
Wd=50u
lng=0.4u
1k
R27
1k
R24
+1.65v
R21
10K
R20
10K
Q+
Q-
C5
0.1p
C6
0.1p
R35
1eq
RX0
E4
13
Q BASEBAND OUT
Q_PULSE+
Q_PULSE-
V17
V18
V1=0
V2=+3.3V
TR=.01n
TF=.01n
PW=200p
PER=1.22549n
TD=300p
V1=0
V2=+3.3v
TR=.01n
TF=.01n
PW=200p
PER=1.22549n
TD=924p

FIG.70E2

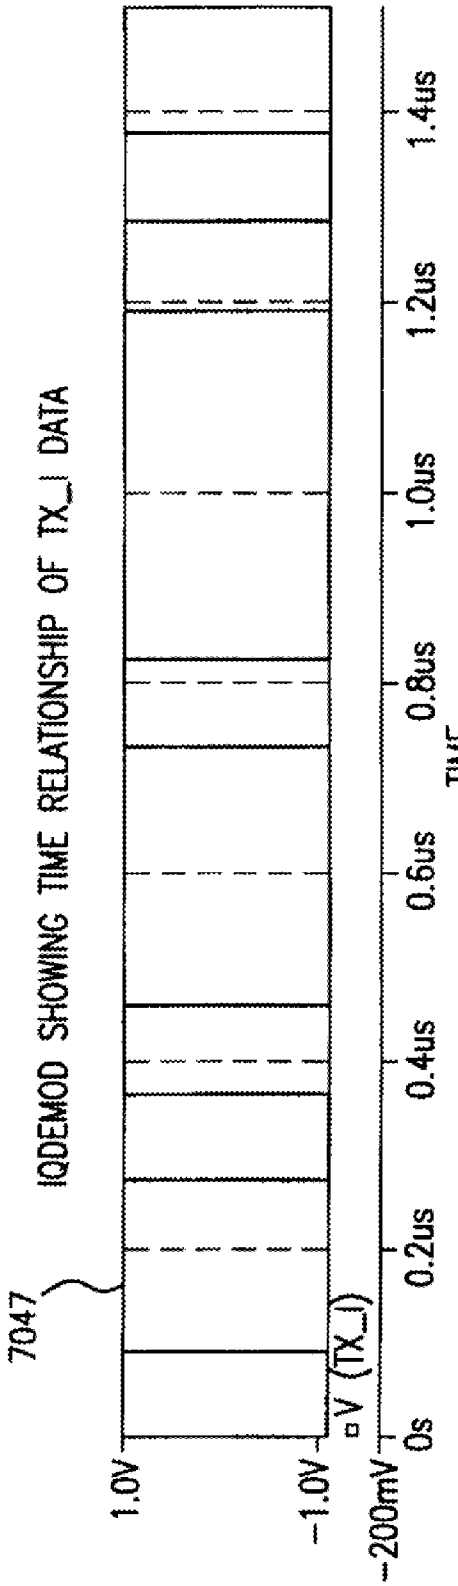


FIG.70F

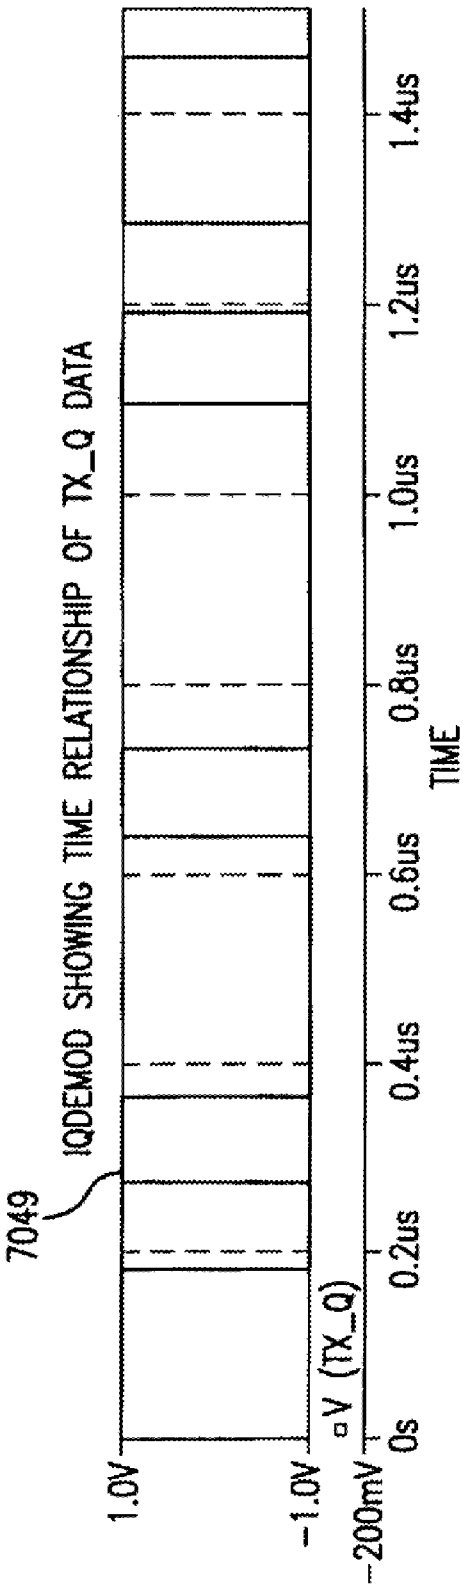


FIG.70G



FIG.70H



FIG.70I



FIG.70J

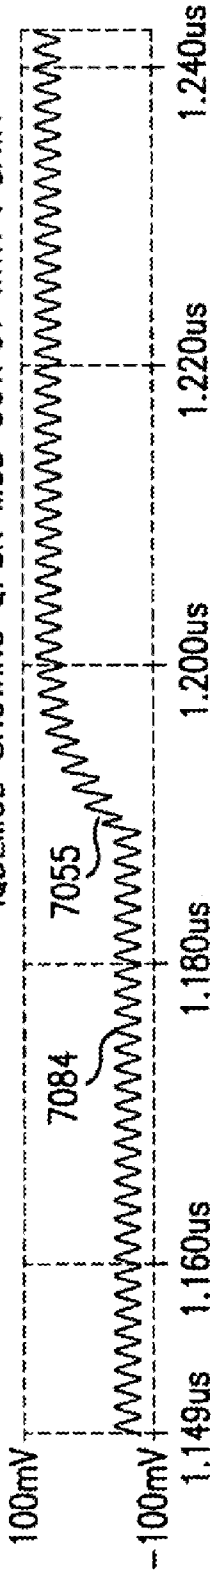


FIG. 70K

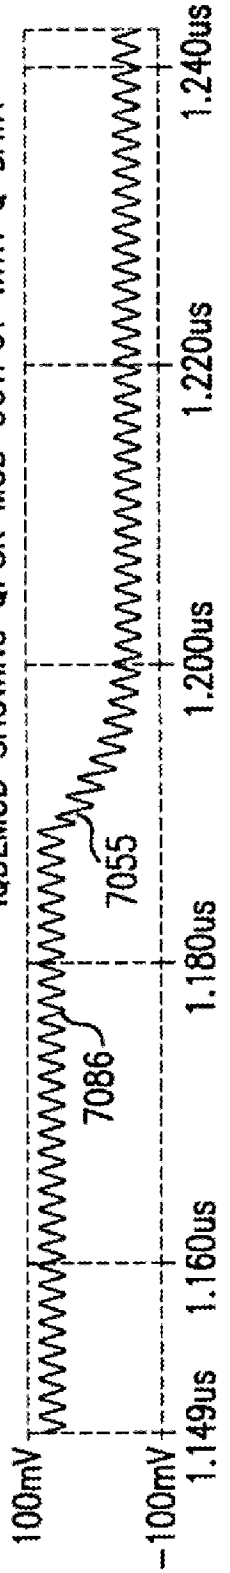


FIG. 70L

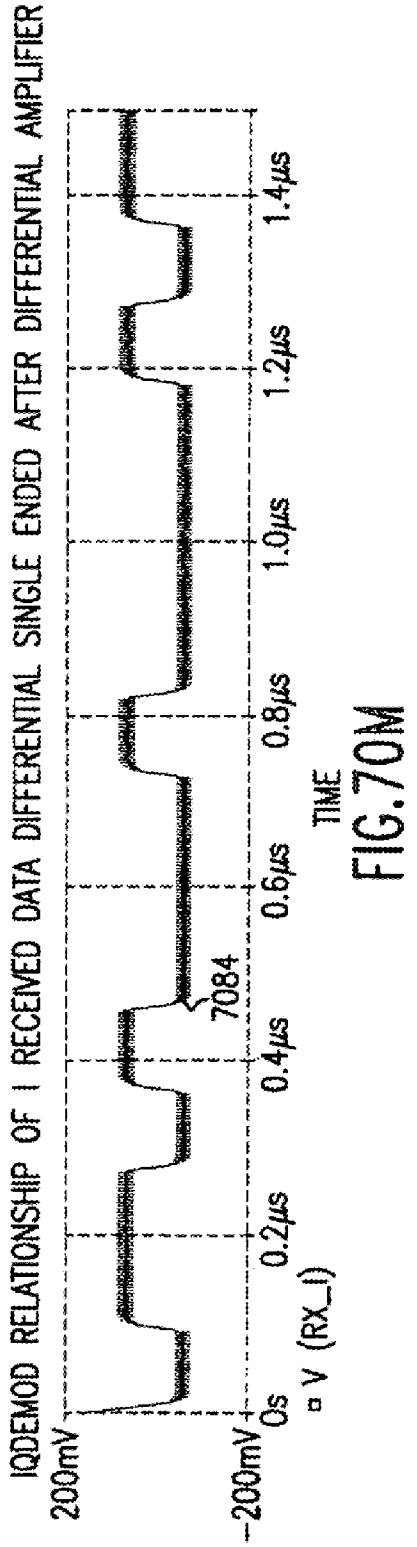


FIG.70M

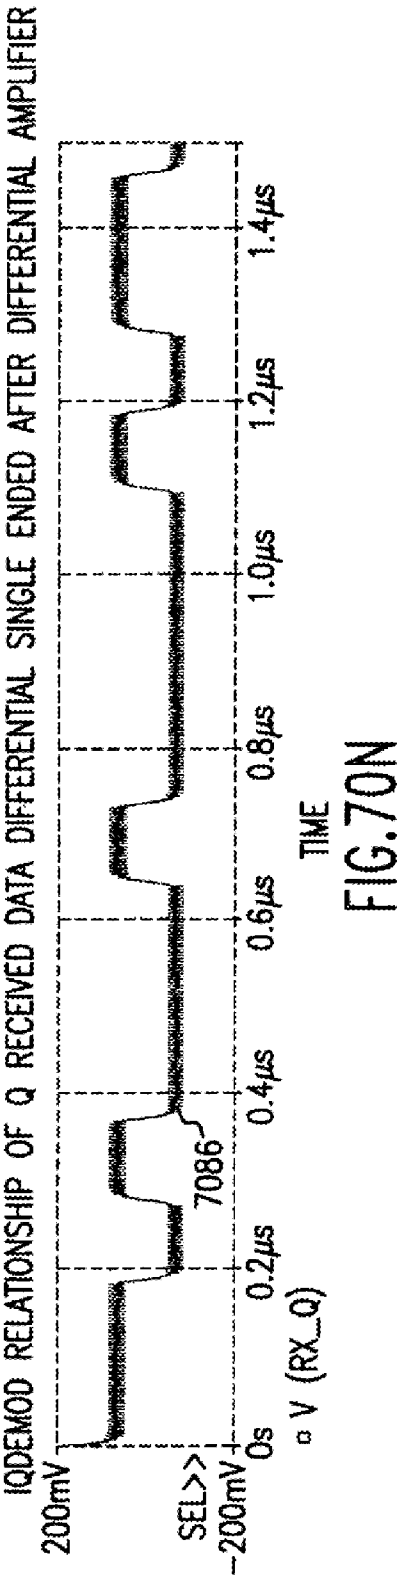


FIG.70N

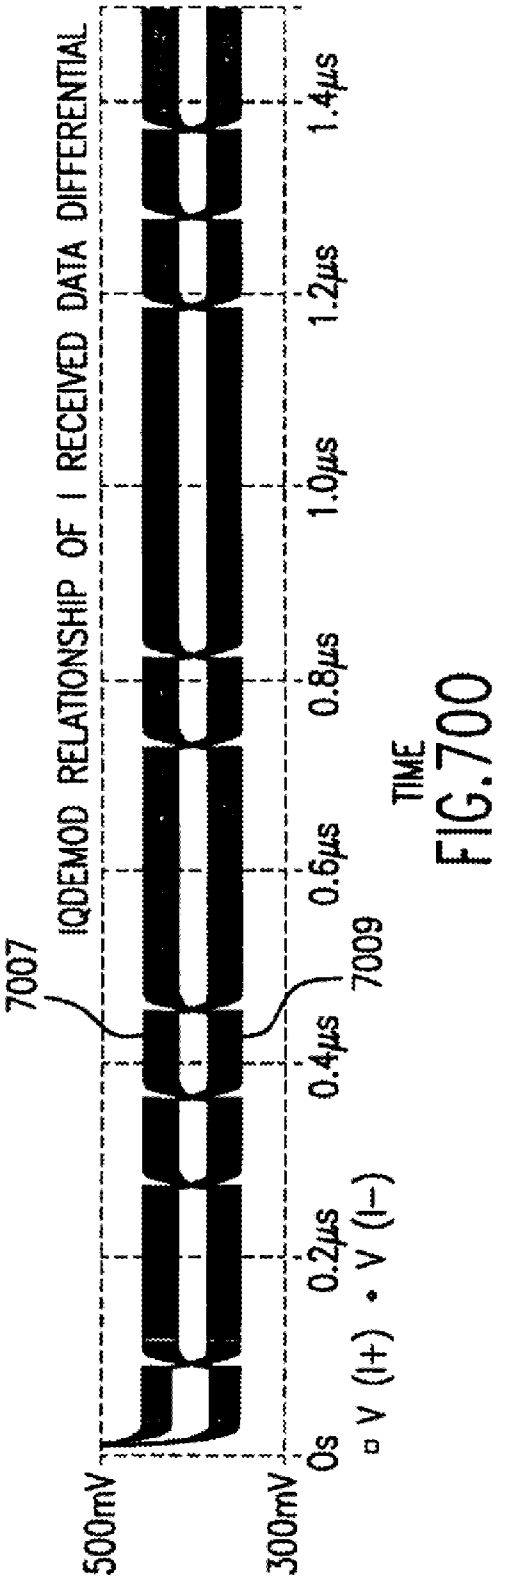


FIG.70O

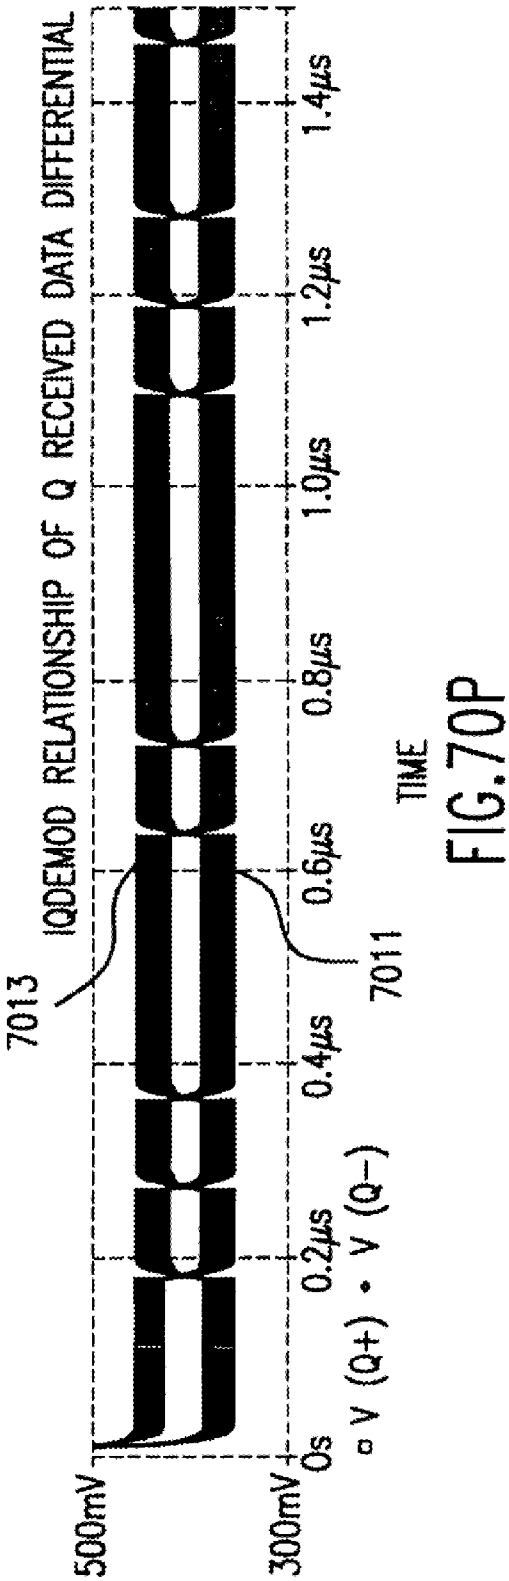


FIG.70P

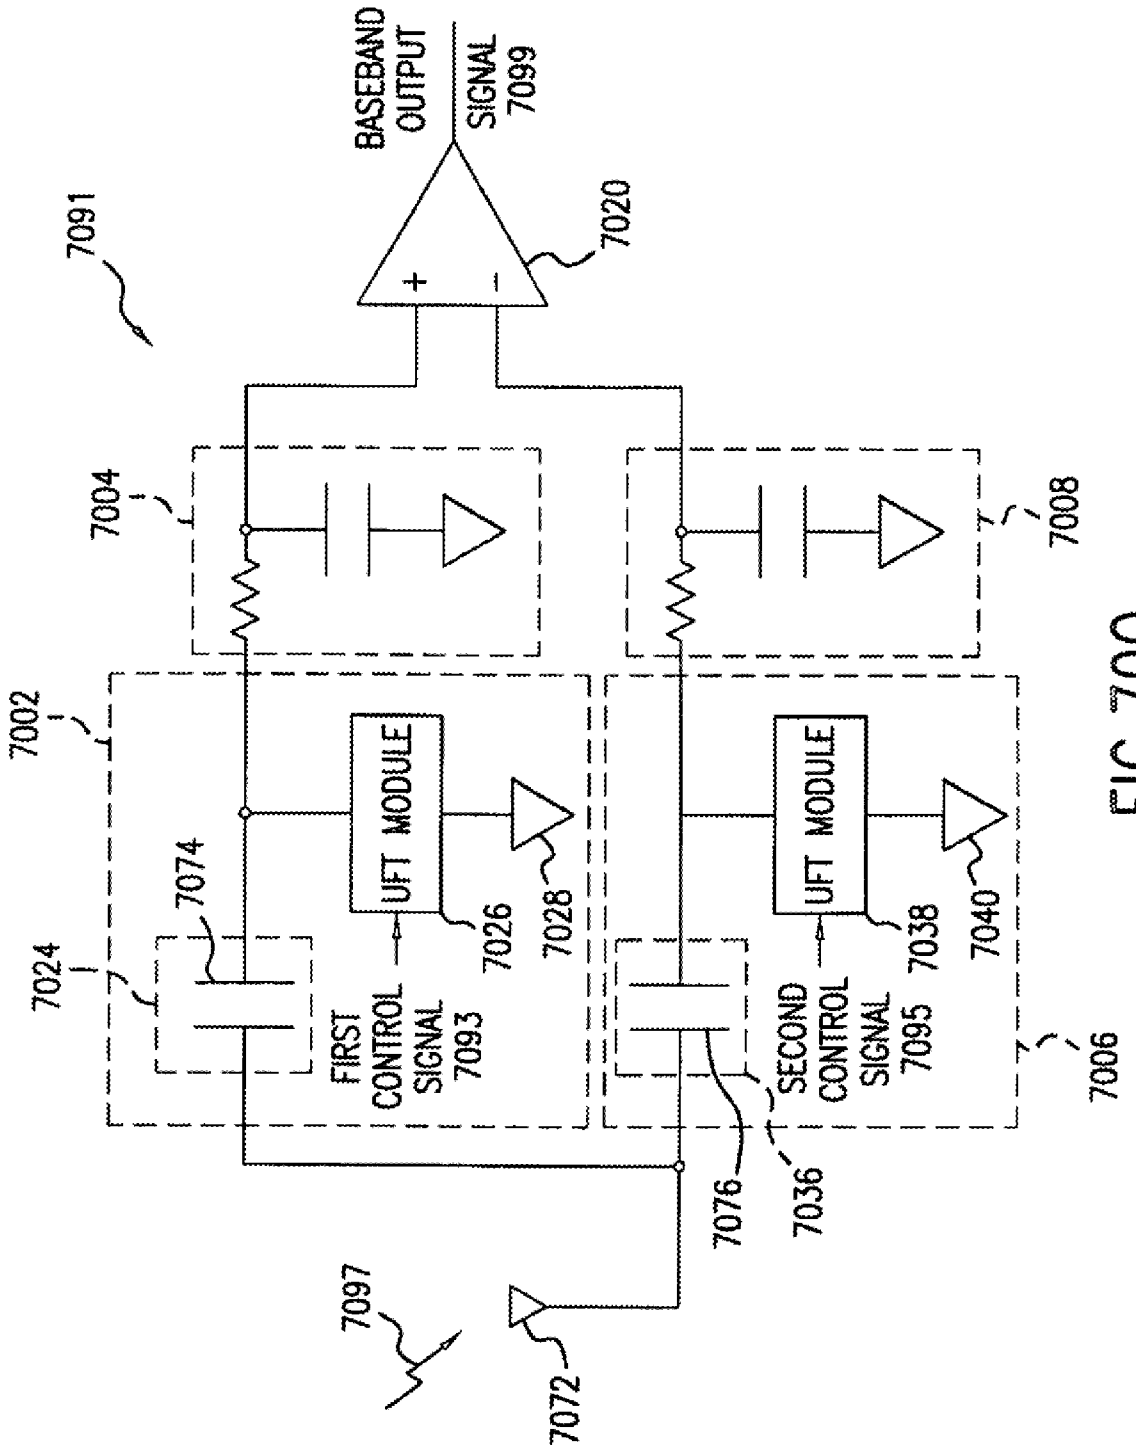

BASEBAND OUTPUT SIGNAL 7099
7091
7020
+
-
7004
7008
7002
UFT MODULE
7074
7026
7028
7024
FIRST CONTROL SIGNAL 7093
UFT MODULE
7038
7040
SECOND CONTROL SIGNAL 7095
7006
7076
7036
7097
7072

FIG. 70Q

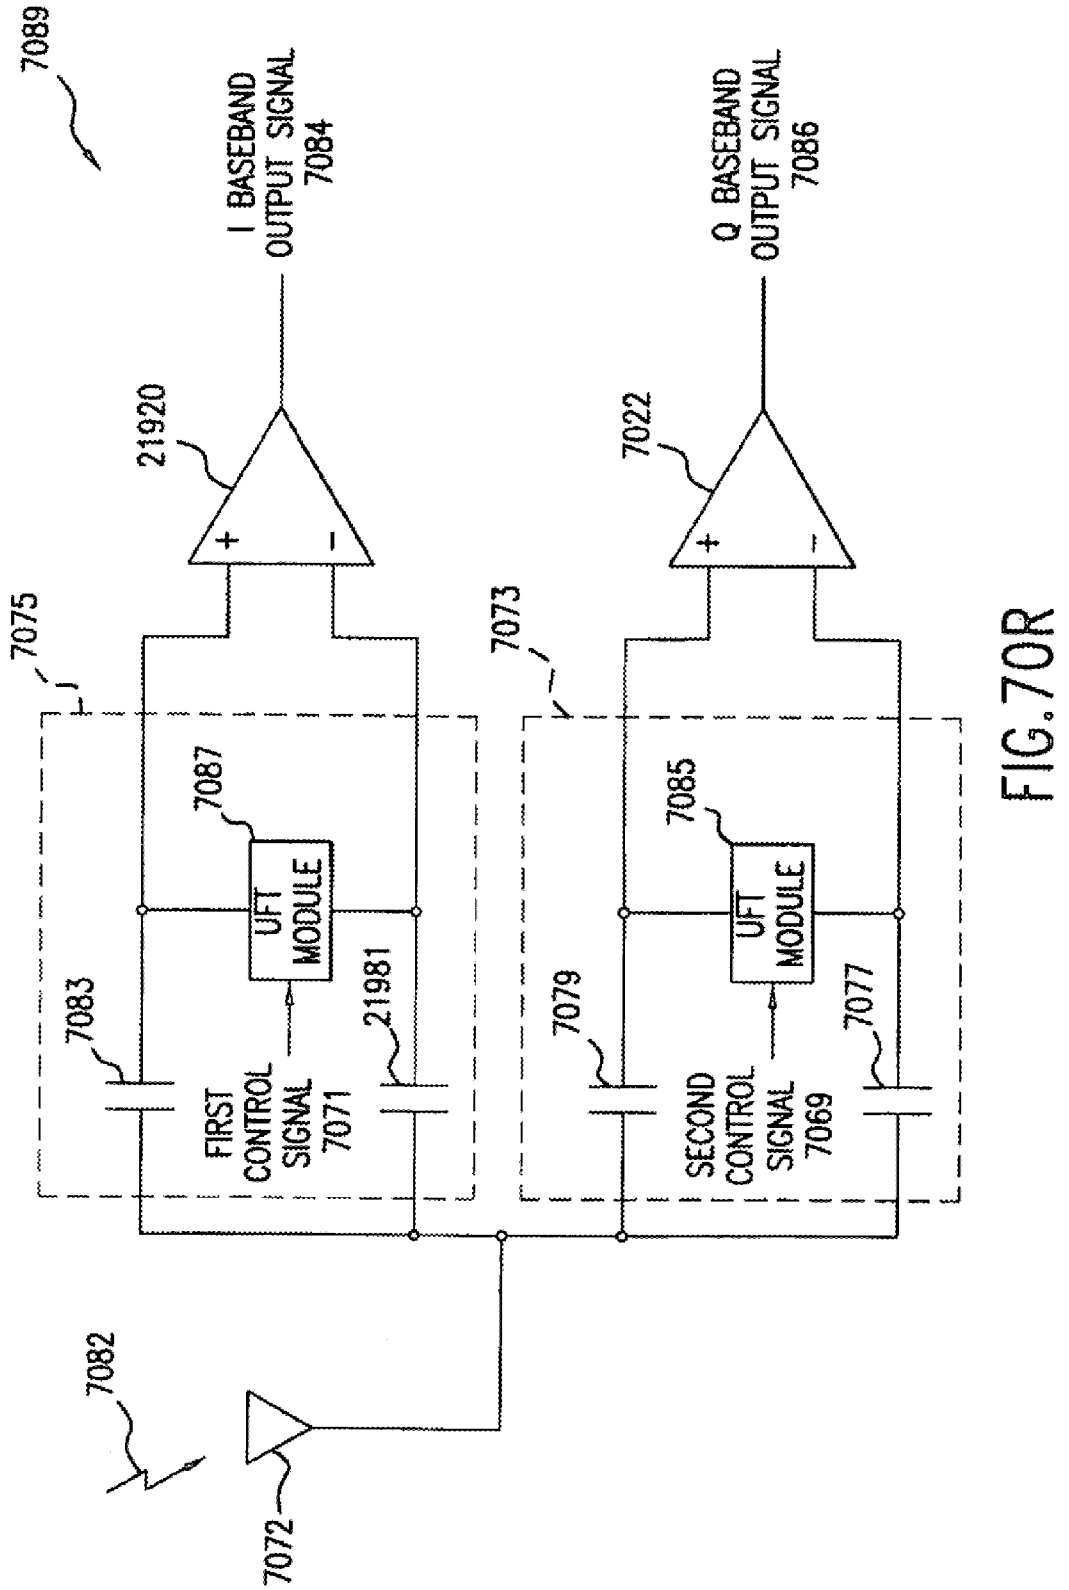

7089
I BASEBAND OUTPUT SIGNAL 7084
Q BASEBAND OUTPUT SIGNAL 7086
21920
7022
+
-
7075
7073
7087
7085
UFT MODULE
UFT MODULE
7083
21981
7079
7077
FIRST CONTROL SIGNAL 7071
SECOND CONTROL SIGNAL 7069
7082
7072

FIG. 70R

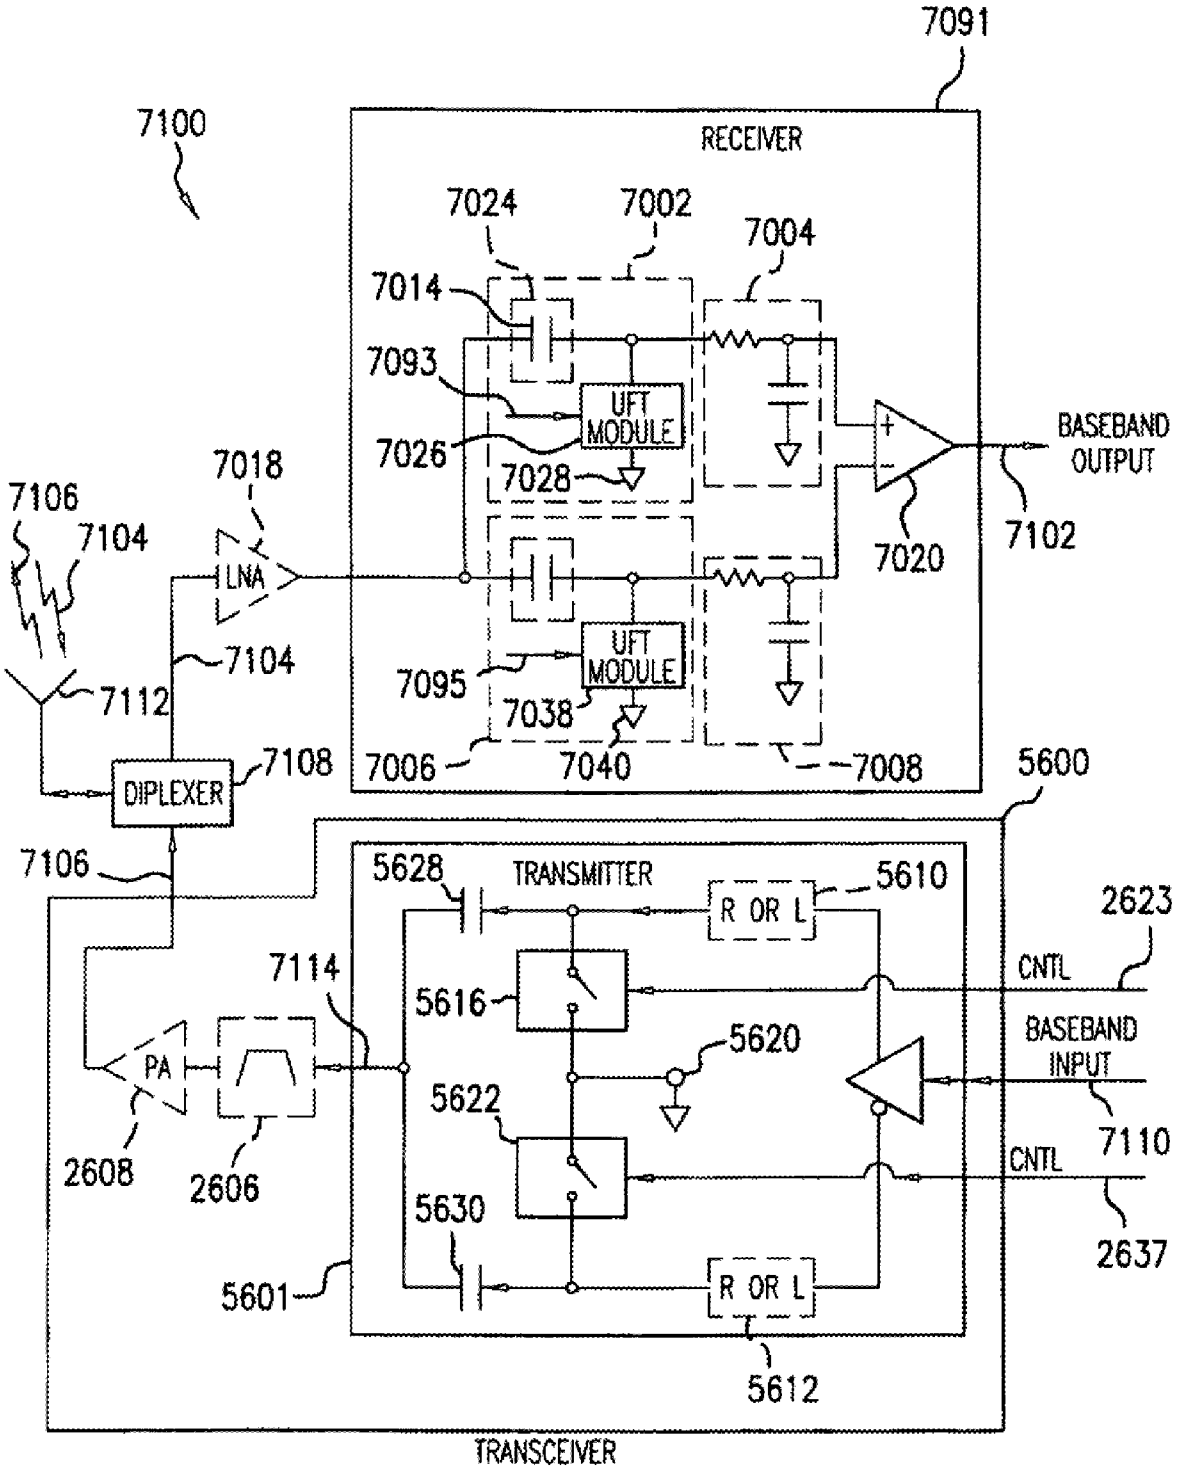

7091
7100
RECEIVER
7024
7002
7004
7014
7093
UFT MODULE
7026
7028
BASEBAND OUTPUT
7018
7106
7104
LNA
7020
7102
7104
7095
UFT MODULE
7112
7038
7040
7006
7008
DIPLEXER
7108
5600
7106
5628
TRANSMITTER
5610
R OR L
2623
CNTL
7114
5616
5620
BASEBAND INPUT
PA
5622
7110
CNTL
2608
2606
5630
2637
5601
R OR L
5612
TRANSCEIVER

FIG.71

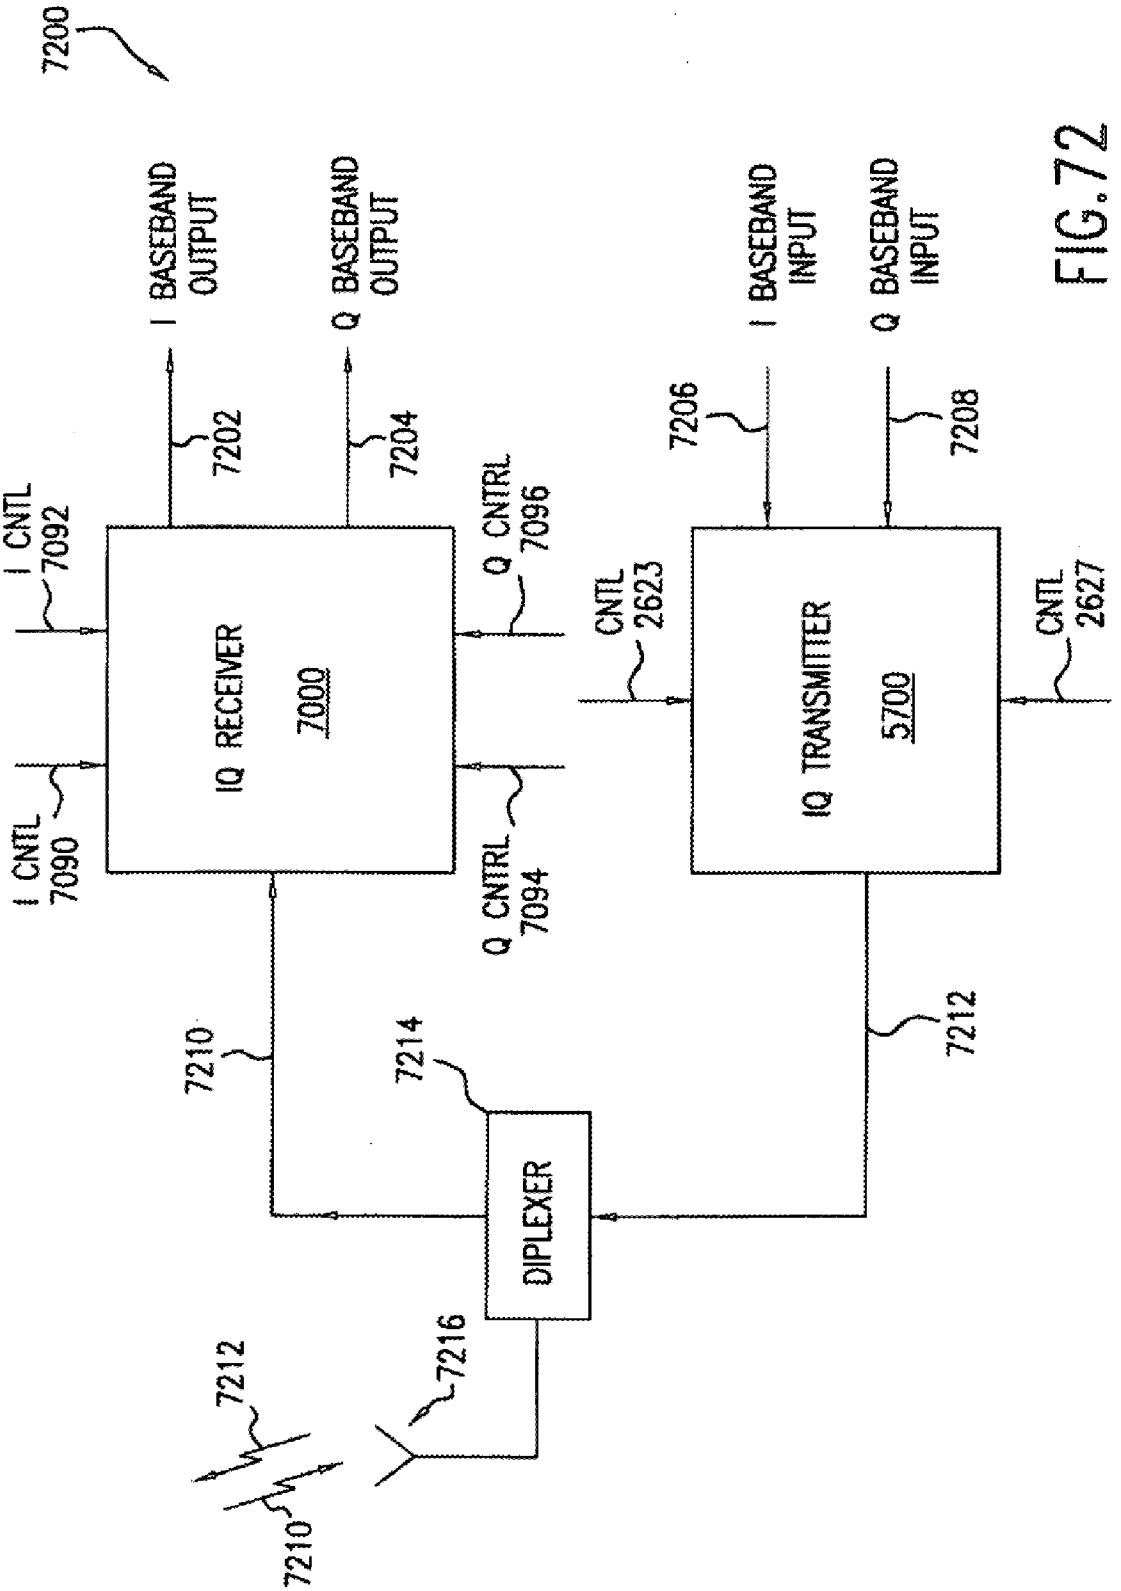

7200
I BASEBAND OUTPUT
Q BASEBAND OUTPUT
I BASEBAND INPUT
Q BASEBAND INPUT
7202
7204
7206
7208
I CNTL 7092
Q CNTRL 7096
CNTL 2623
CNTL 2627
IQ RECEIVER 7000
IQ TRANSMITTER 5700
I CNTL 7090
Q CNTRL 7094
7210
7214
7212
DIPLEXER
7216
7212
7210

FIG. 72

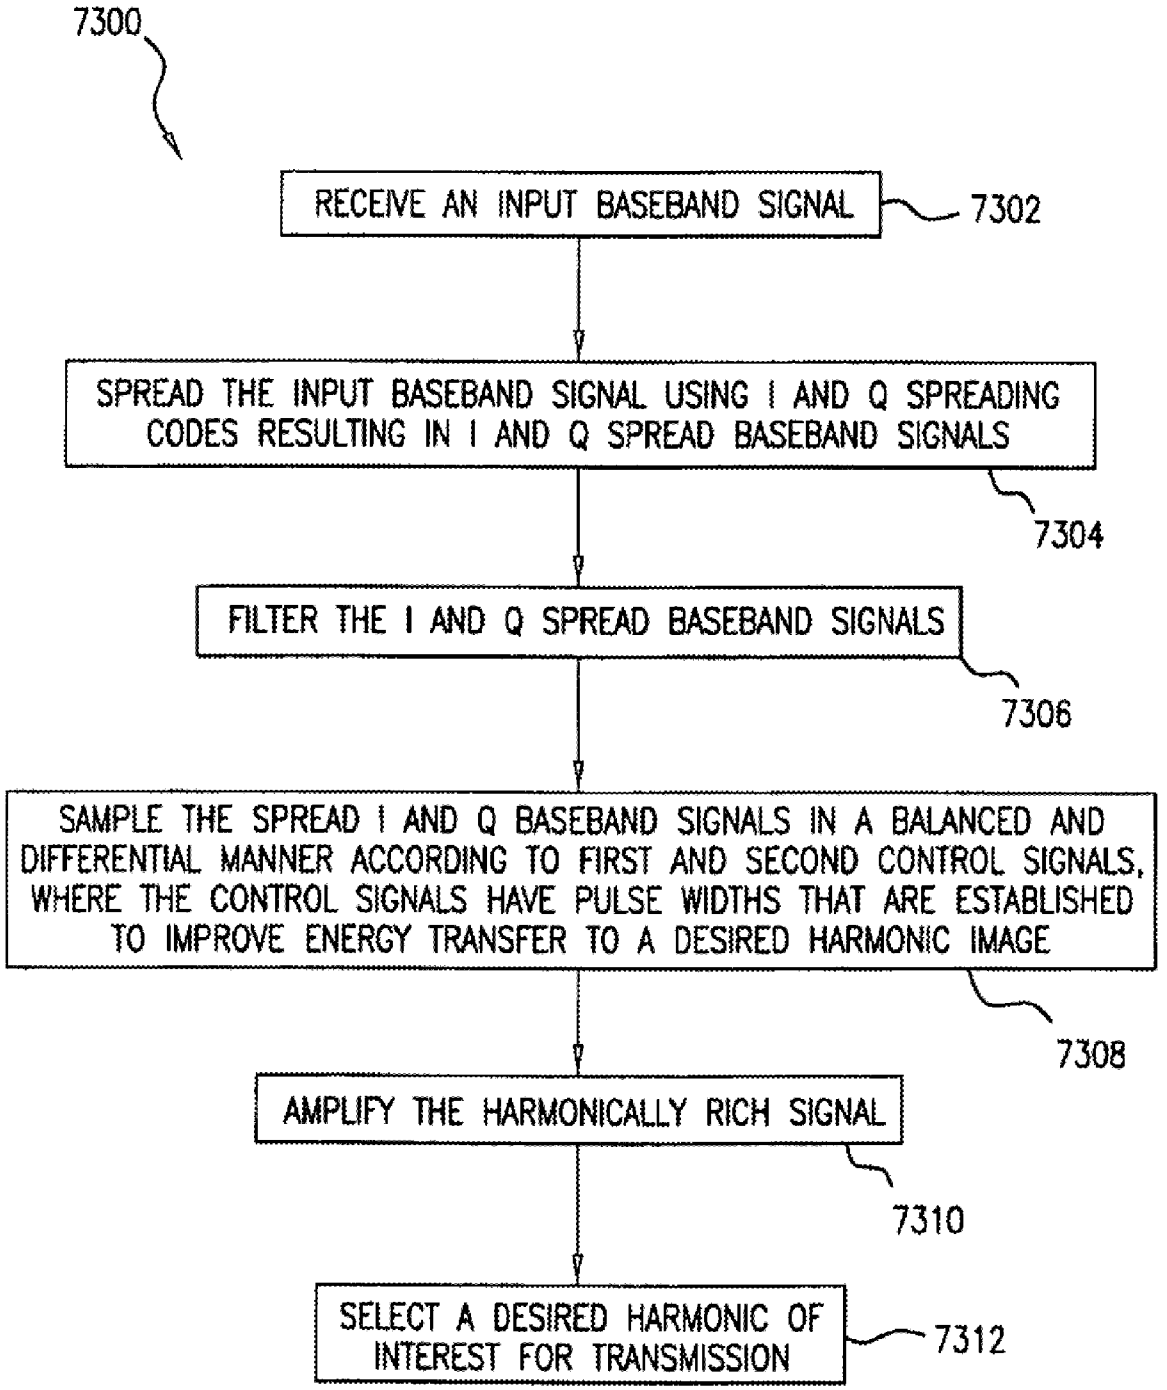

7300
RECEIVE AN INPUT BASEBAND SIGNAL
7302
SPREAD THE INPUT BASEBAND SIGNAL USING I AND Q SPREADING CODES RESULTING IN I AND Q SPREAD BASEBAND SIGNALS
7304
FILTER THE I AND Q SPREAD BASEBAND SIGNALS
7306
SAMPLE THE SPREAD I AND Q BASEBAND SIGNALS IN A BALANCED AND DIFFERENTIAL MANNER ACCORDING TO FIRST AND SECOND CONTROL SIGNALS, WHERE THE CONTROL SIGNALS HAVE PULSE WIDTHS THAT ARE ESTABLISHED TO IMPROVE ENERGY TRANSFER TO A DESIRED HARMONIC IMAGE
7308
AMPLIFY THE HARMONICALLY RICH SIGNAL
7310
SELECT A DESIRED HARMONIC OF INTEREST FOR TRANSMISSION
7312

FIG.73

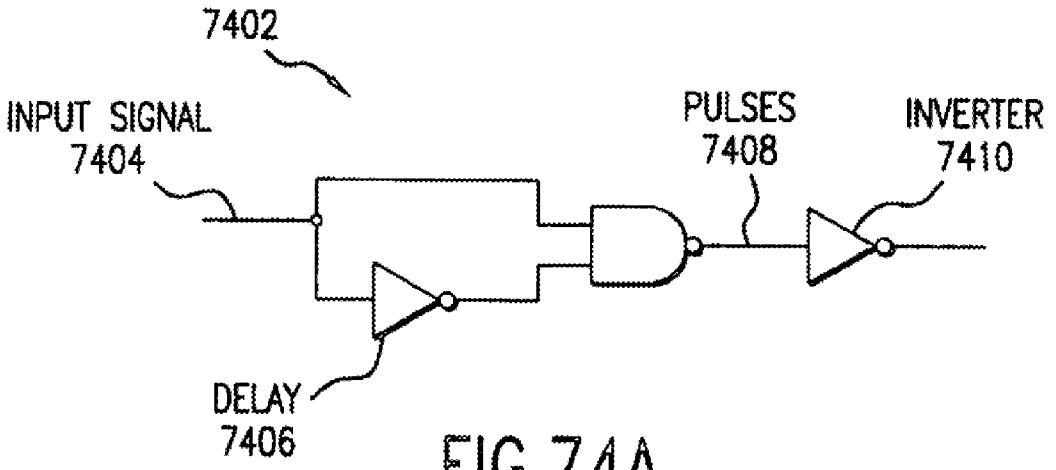


FIG.74A

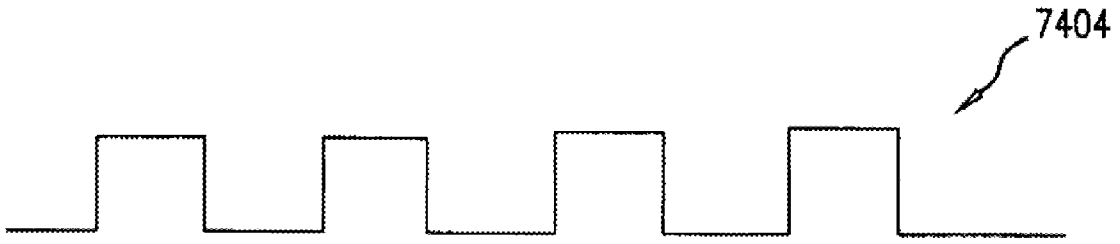


FIG.74B

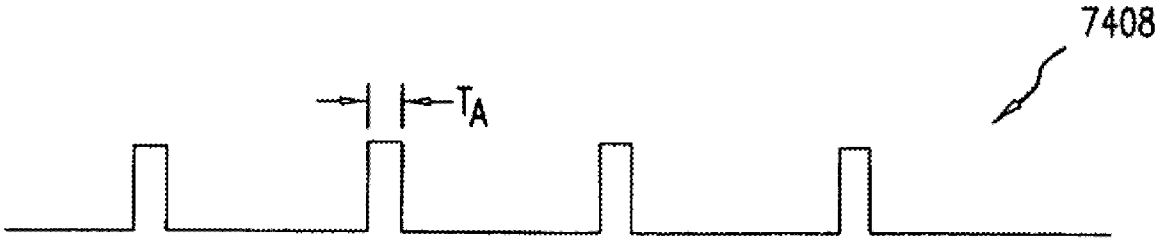


FIG.74C

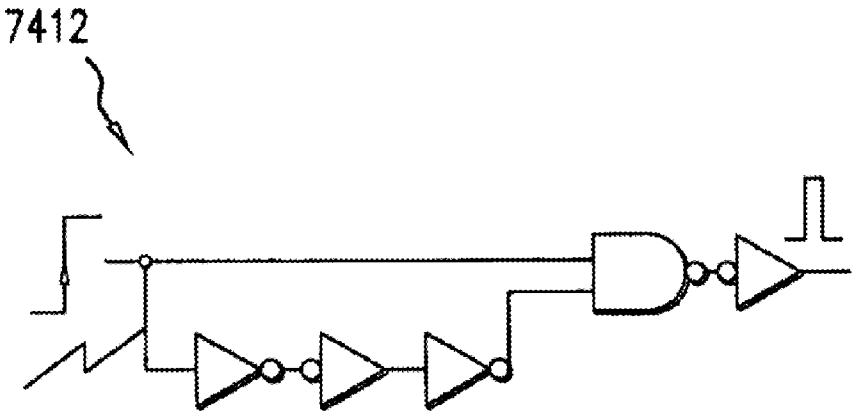


FIG.74D

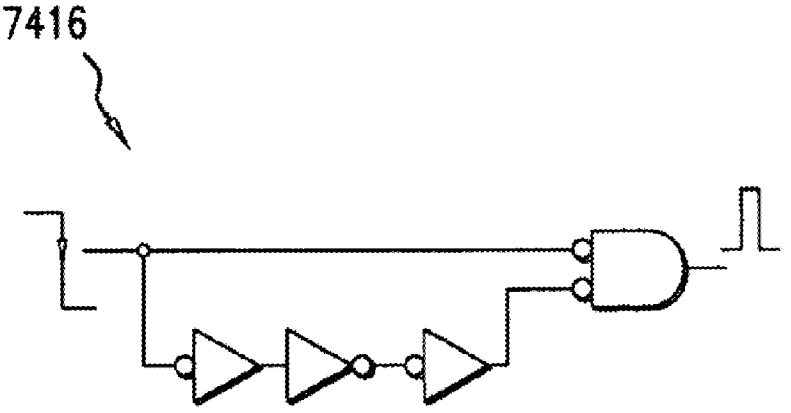


FIG.74E