



US 20110121744A1

(19) **United States**

(12) **Patent Application Publication**
Salvestrini et al.

(10) **Pub. No.: US 2011/0121744 A1**

(43) **Pub. Date: May 26, 2011**

(54) **CONTROLLABLE-LOAD CIRCUIT FOR USE
WITH A LOAD CONTROL DEVICE**

Publication Classification

(51) **Int. Cl.**
H05B 41/16

(2006.01)

(52) **U.S. Cl.** **315/246**

(57) **ABSTRACT**

A load control device for controlling the amount of power delivered from an AC power source to an electrical load is operable to conduct enough current through a thyristor of a connected dimmer switch to exceed rated latching and holding currents of the thyristor. The load control device comprises a controllable-load circuit operable to conduct a controllable-load current through the thyristor of the dimmer switch. The load control device disables the controllable-load circuit when the phase-control voltage received from the dimmer switch is a reverse phase-control waveform. When the phase-control voltage received from the dimmer switch is a forward phase-control waveform, the load control device is operable to decrease the magnitude of the controllable-load current so as to conduct only enough current as is required in order to exceed rated latching and holding currents of the thyristor.

(75) **Inventors:** **Christopher James Salvestrini**,
Allentown, PA (US); **Ryan S. Bedell**, Breinigsville, PA (US);
Matthew V. Harte, Breinigsville, PA (US)


(73) **Assignee:** **Lutron Electronics Co., Inc.**

(21) **Appl. No.:** **12/950,079**

(22) **Filed:** **Nov. 19, 2010**

Related U.S. Application Data

(60) Provisional application No. 61/263,204, filed on Nov. 20, 2009.

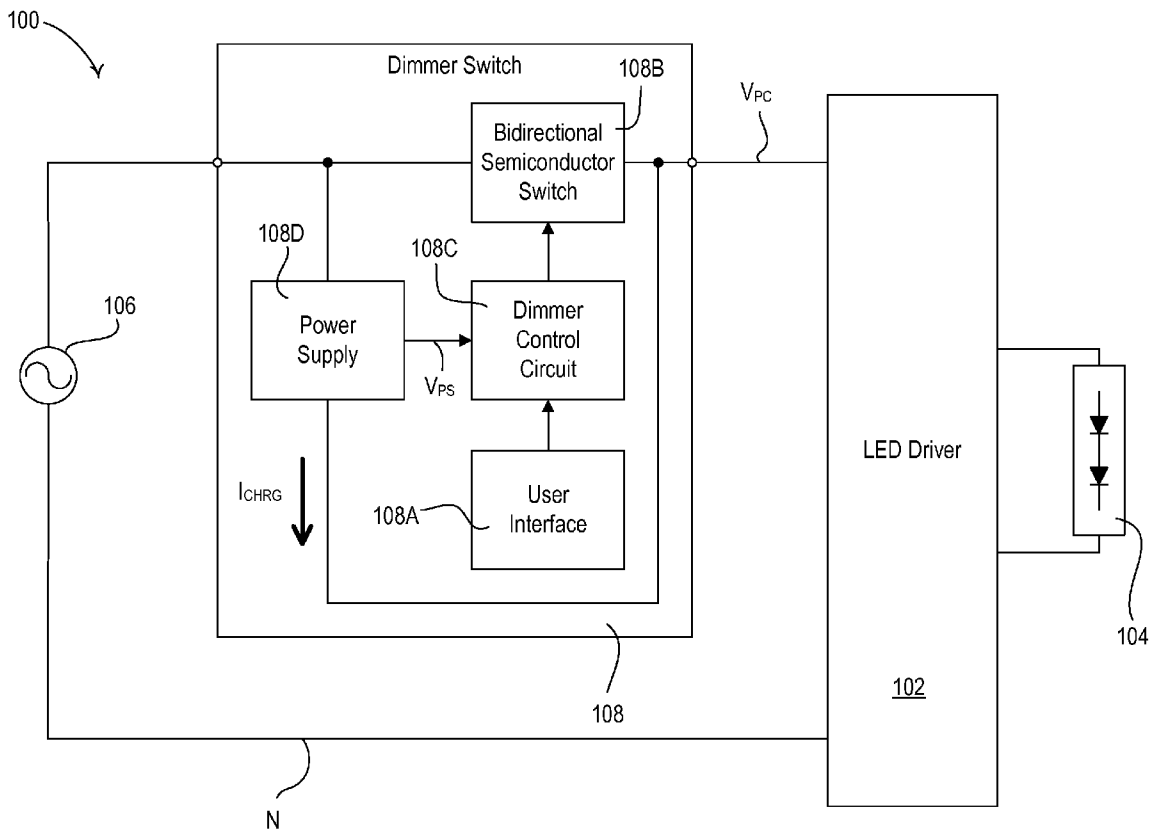

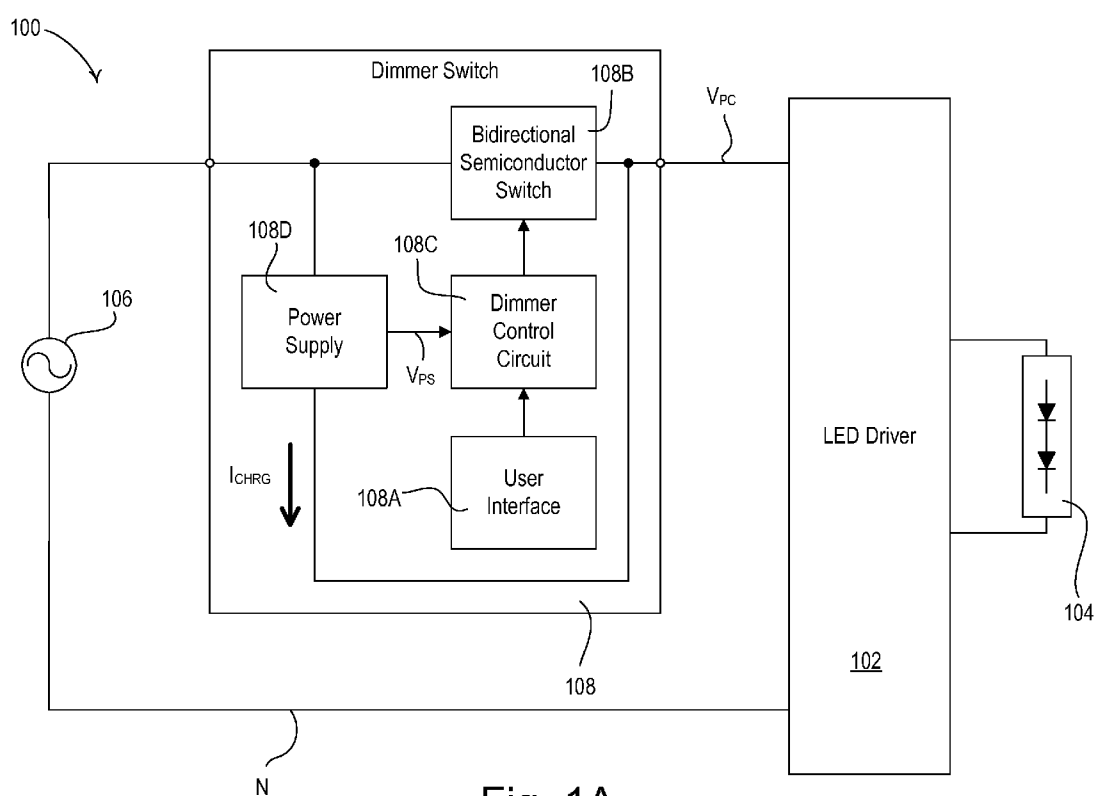


Fig. 1A

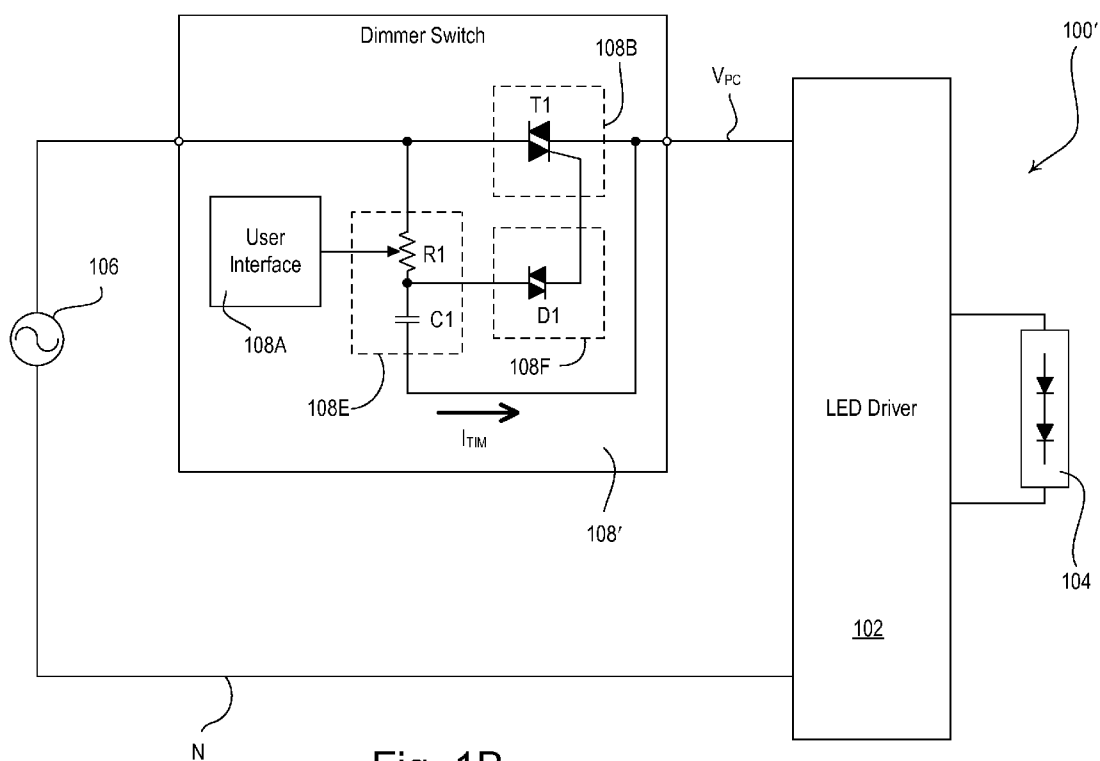


Fig. 1B

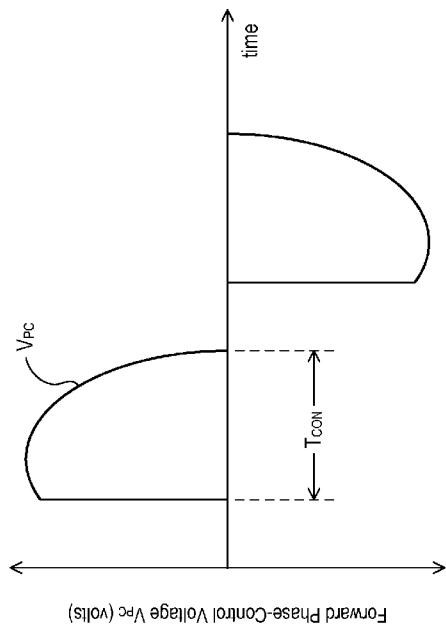


Fig. 2A

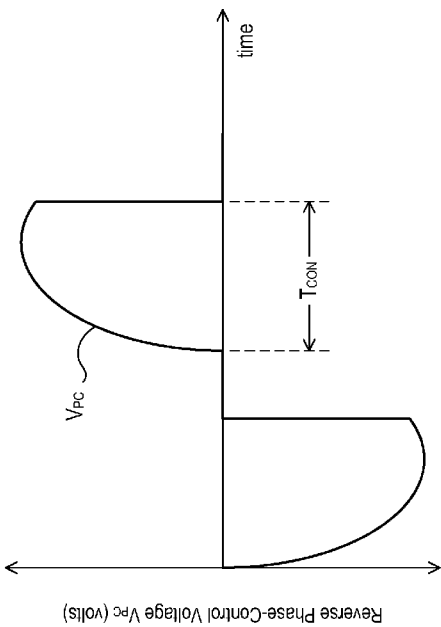


Fig. 2B

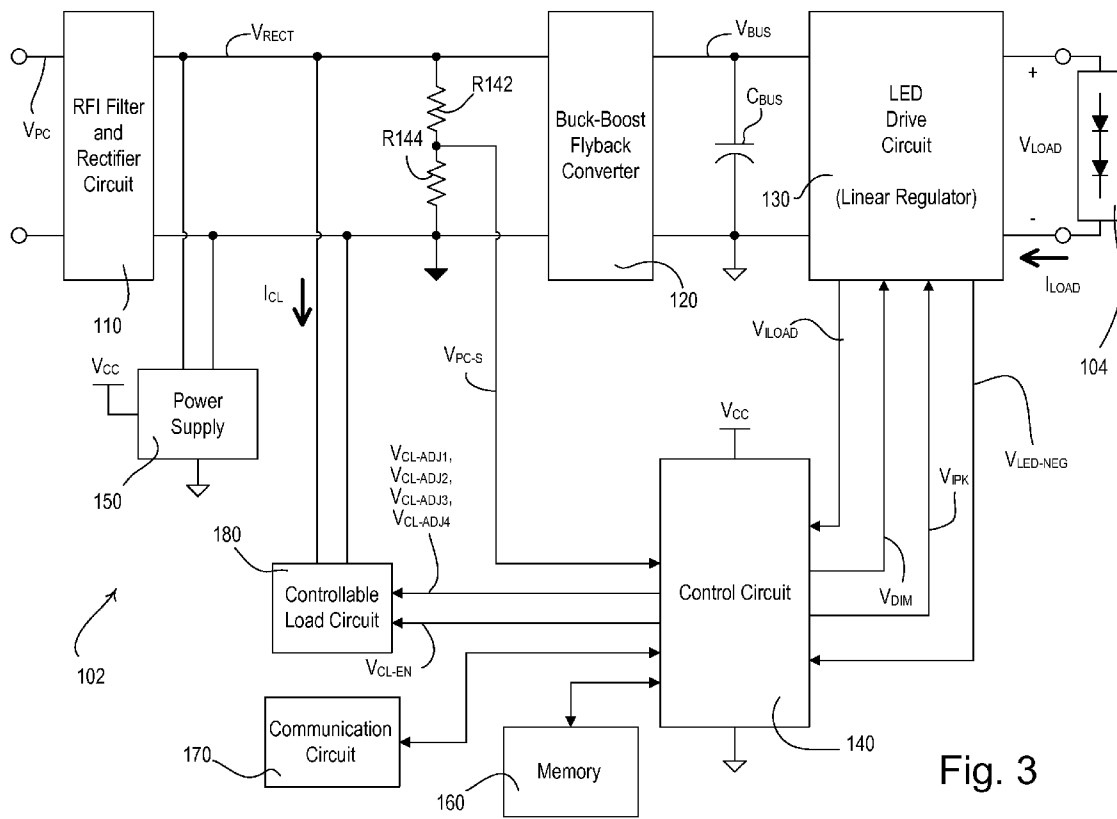


Fig. 3

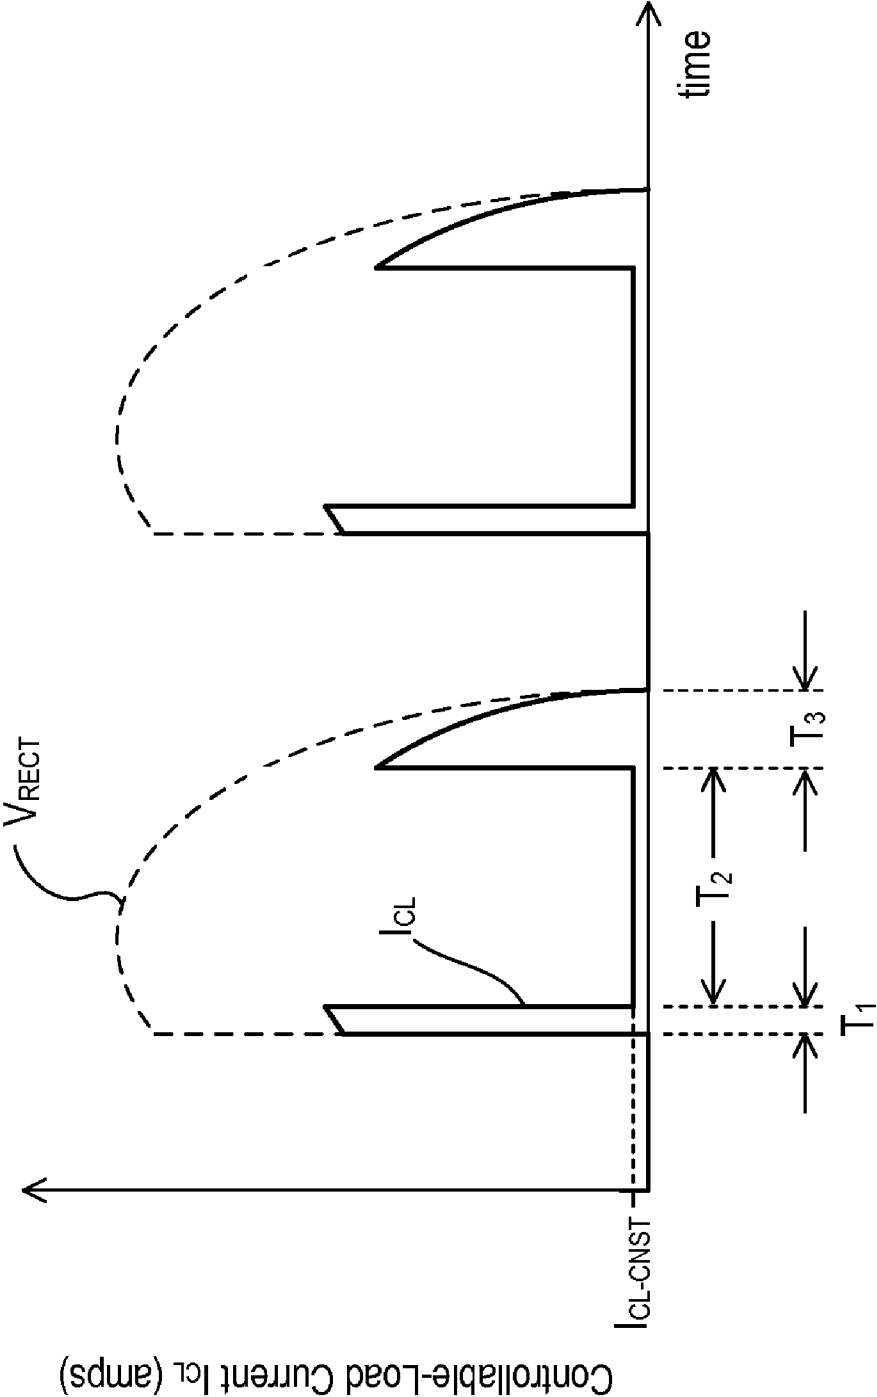
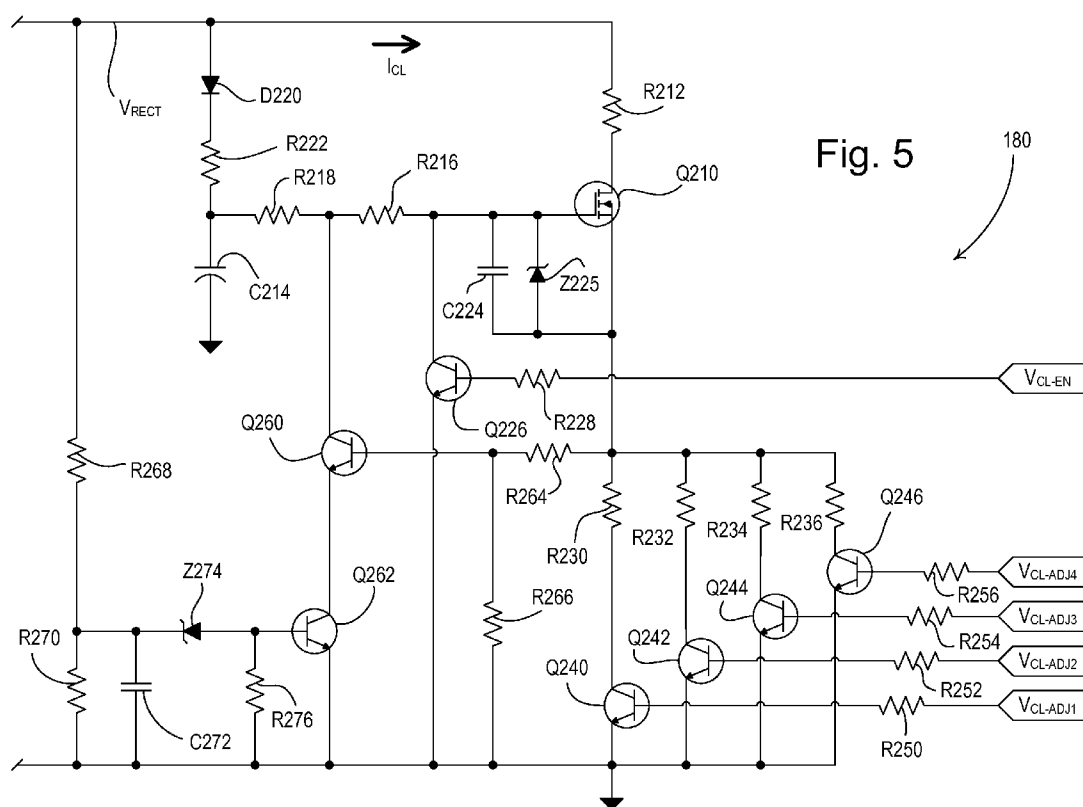


Fig. 4



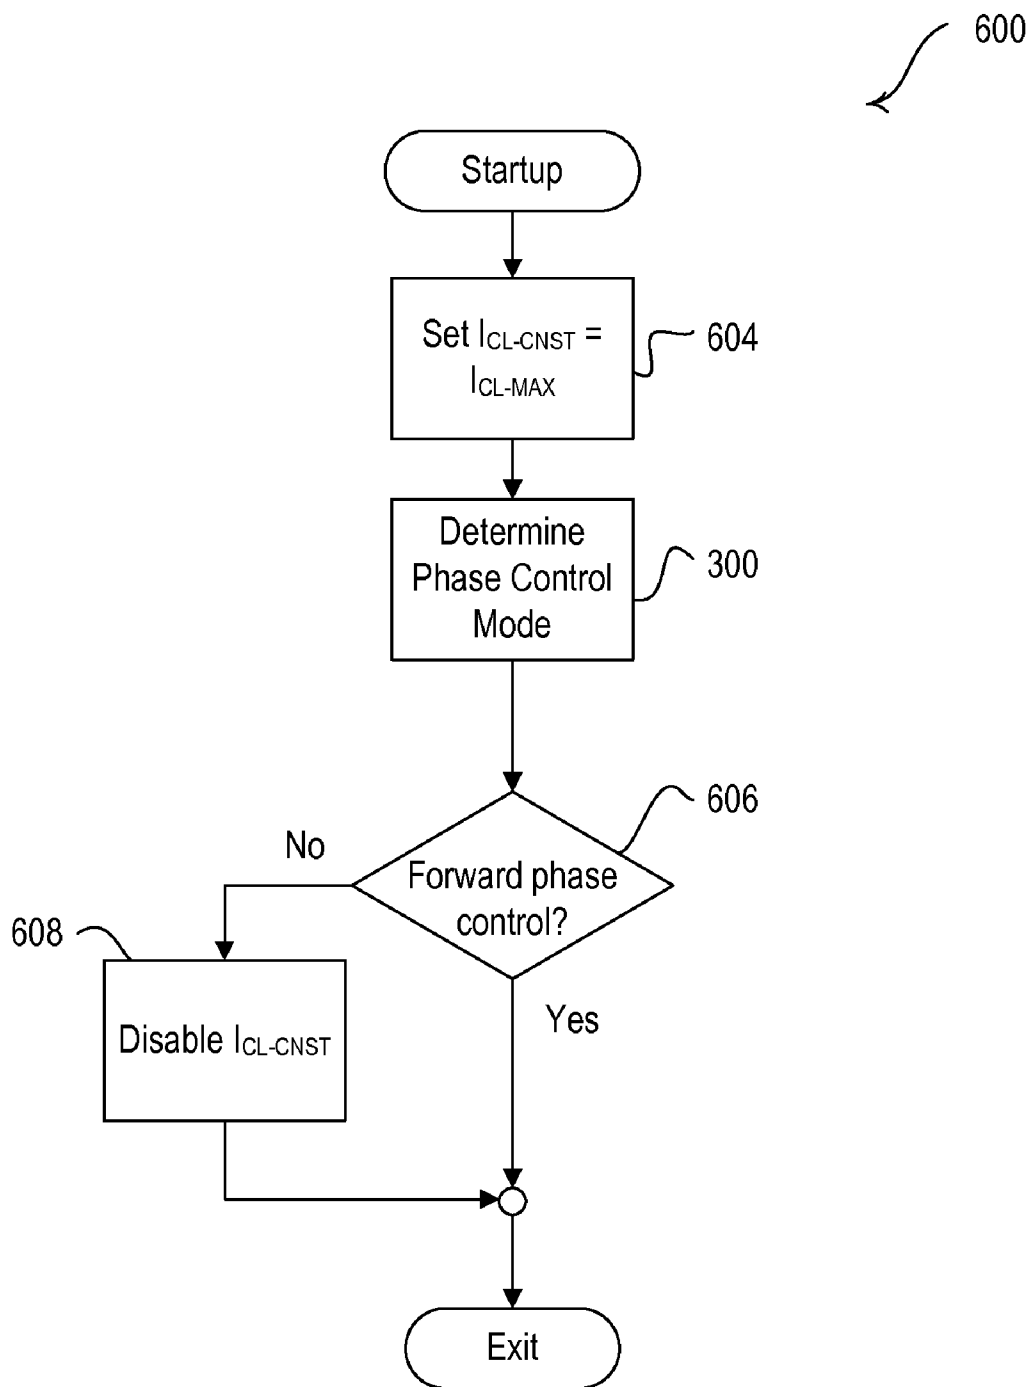


Fig. 6

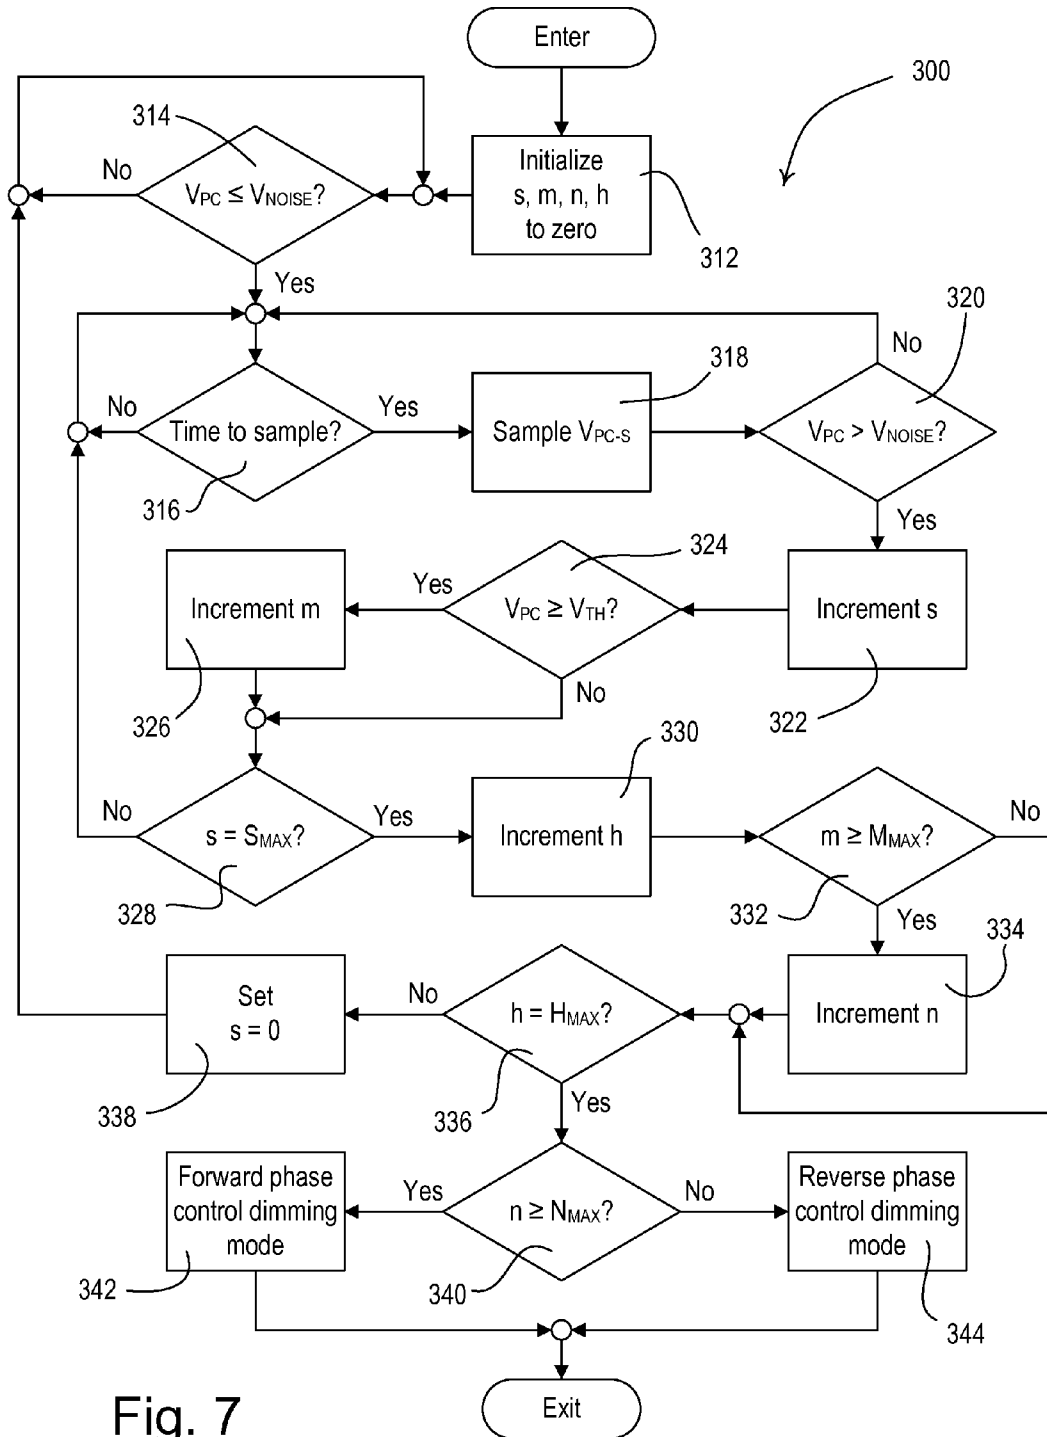


Fig. 7

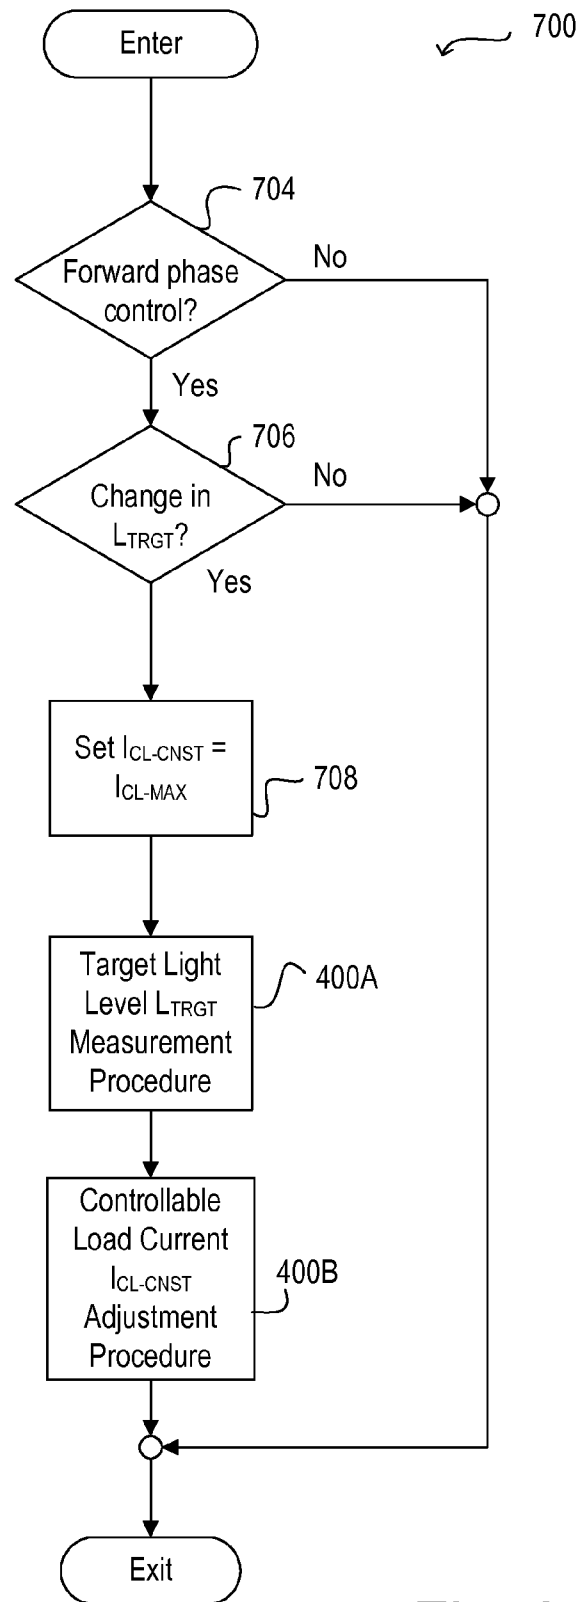


Fig. 8

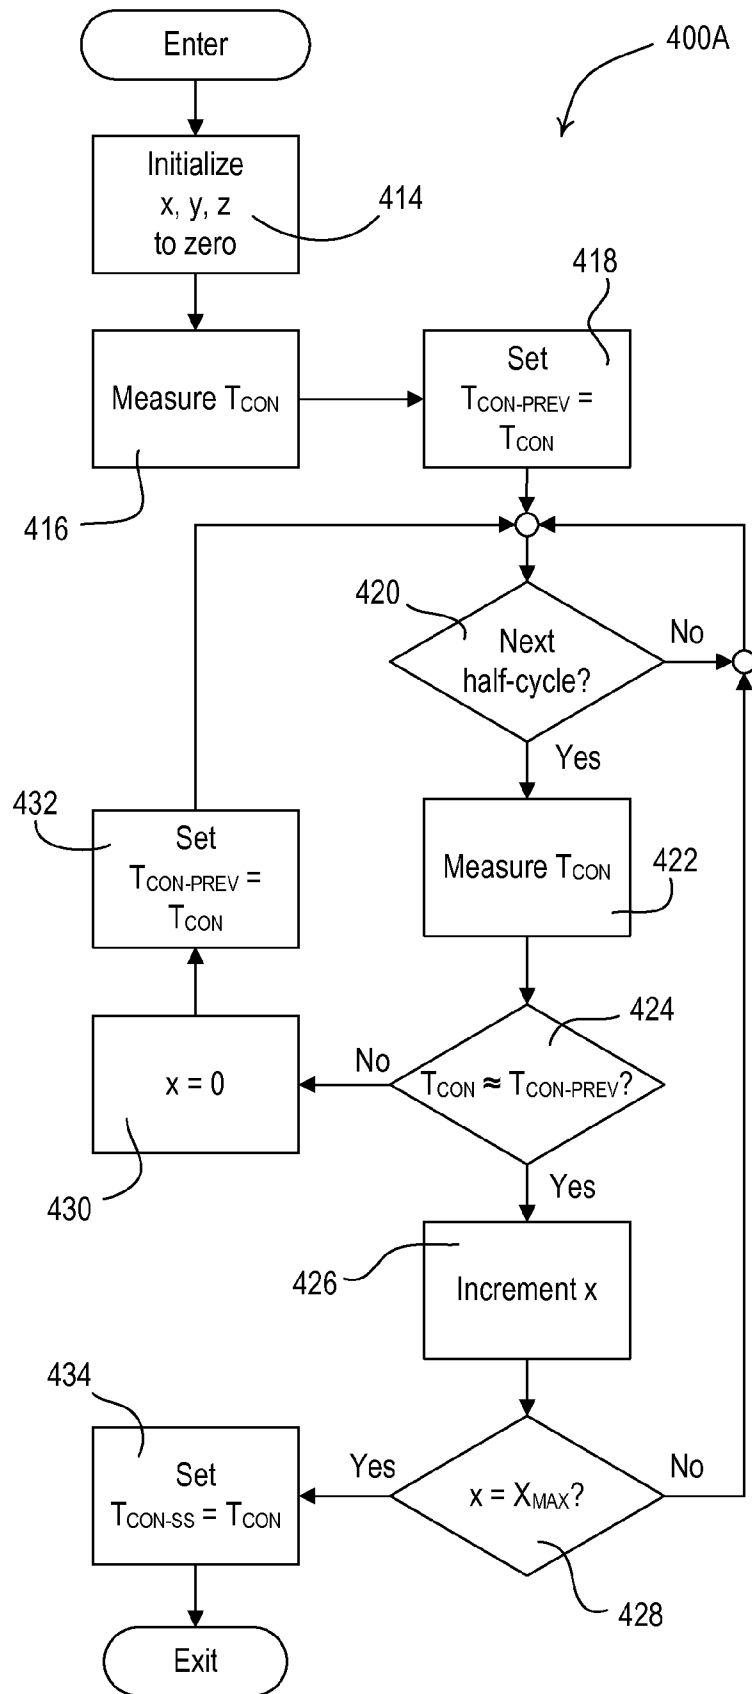


Fig. 9

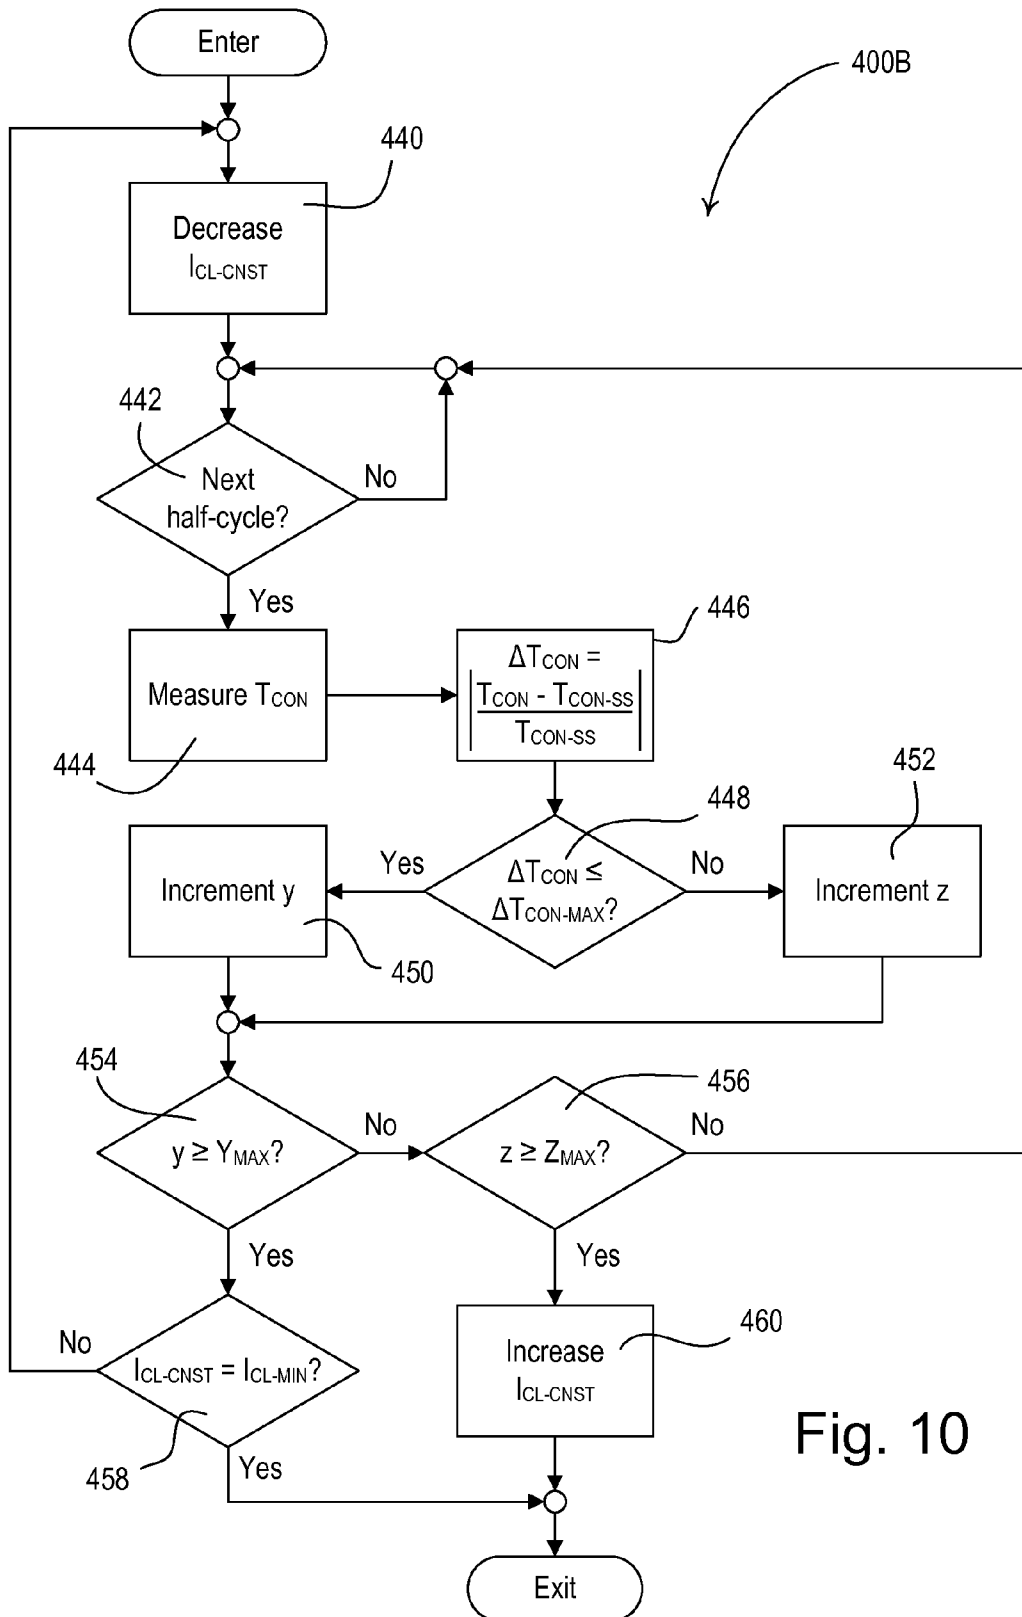


Fig. 10

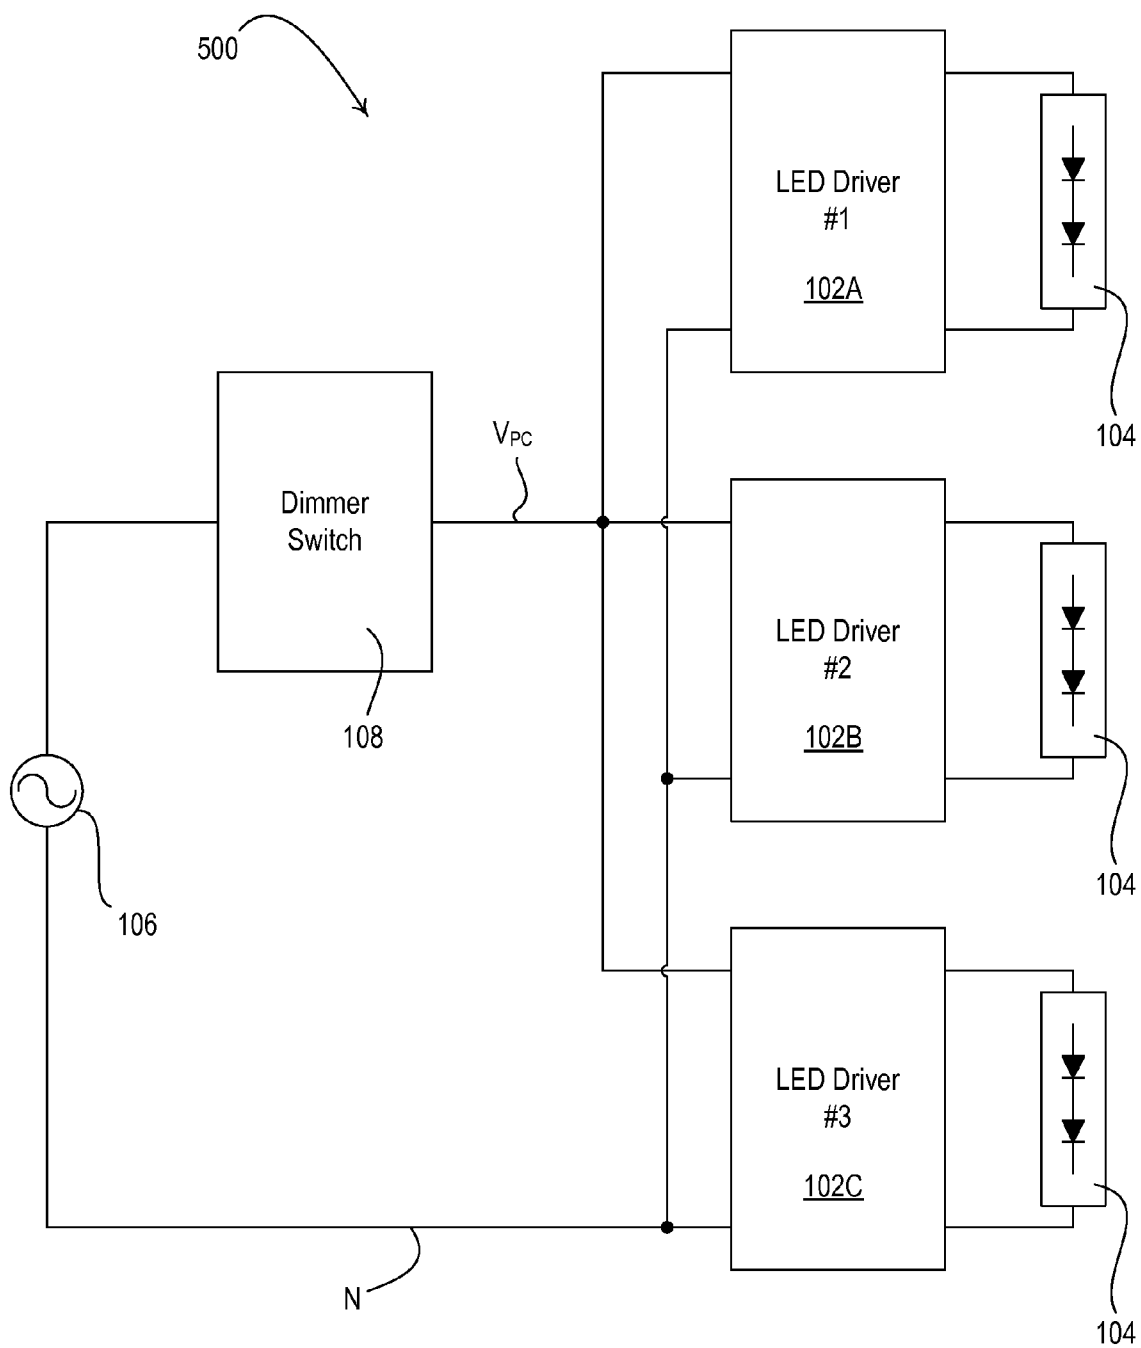


Fig. 11

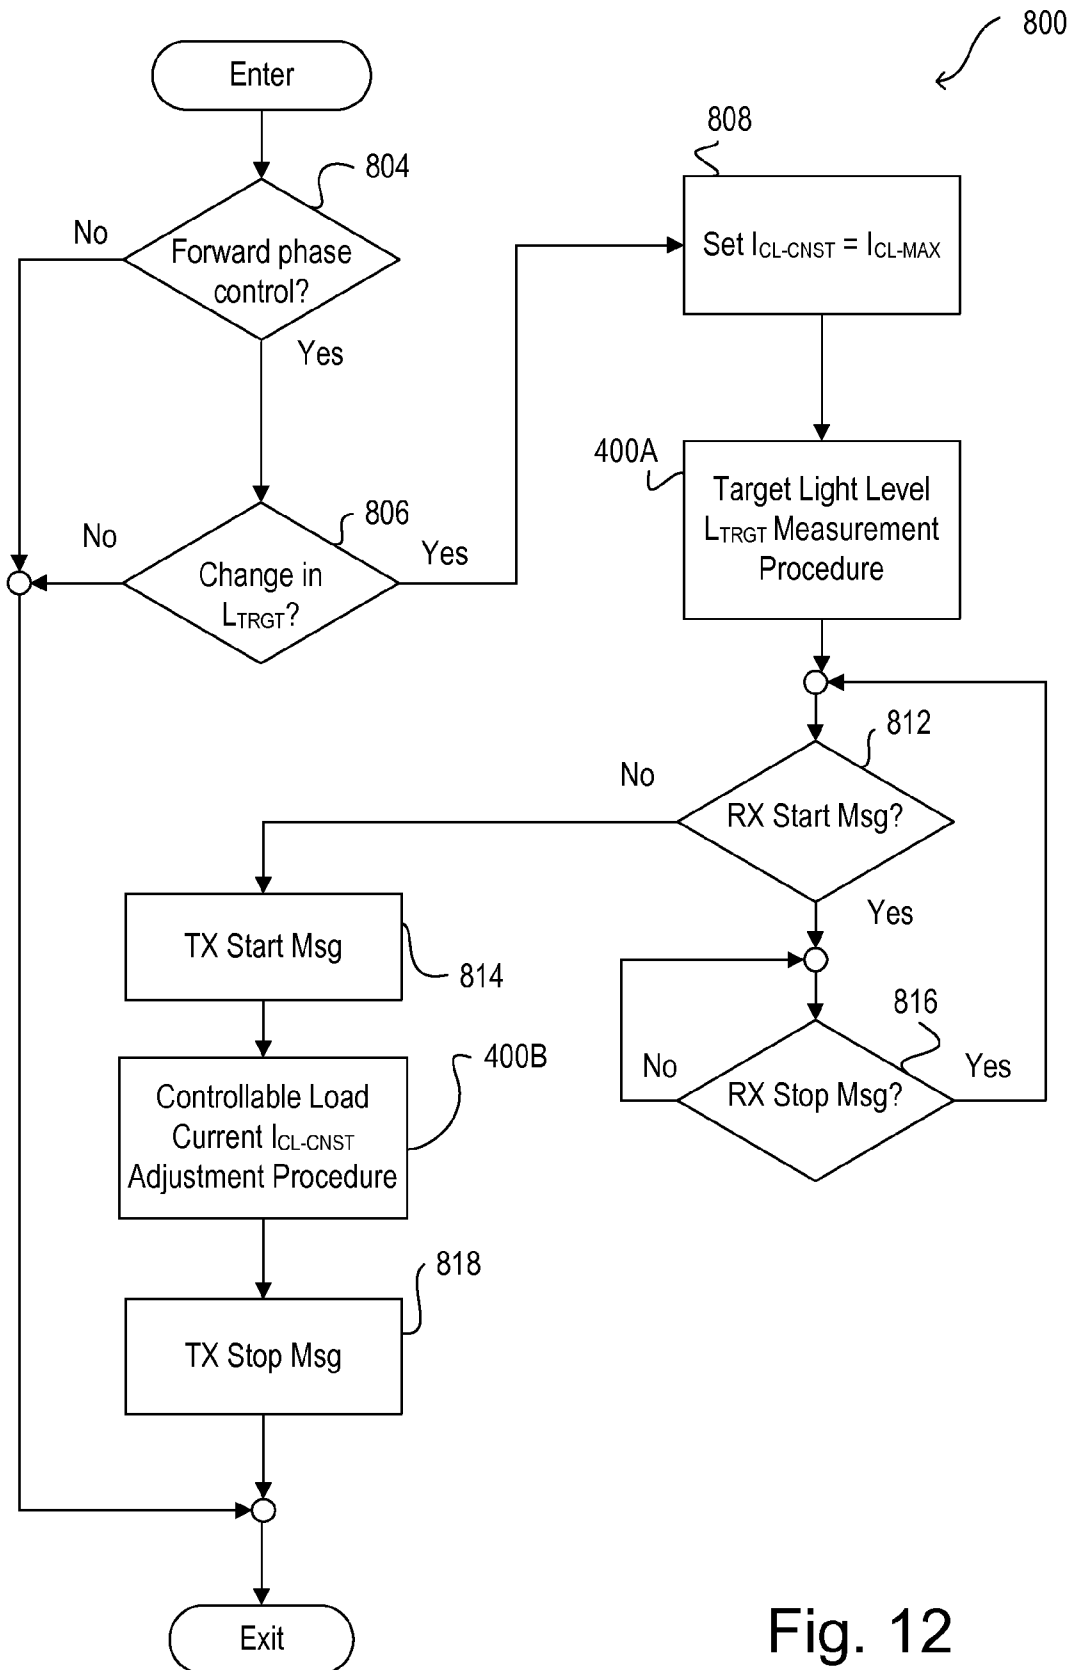
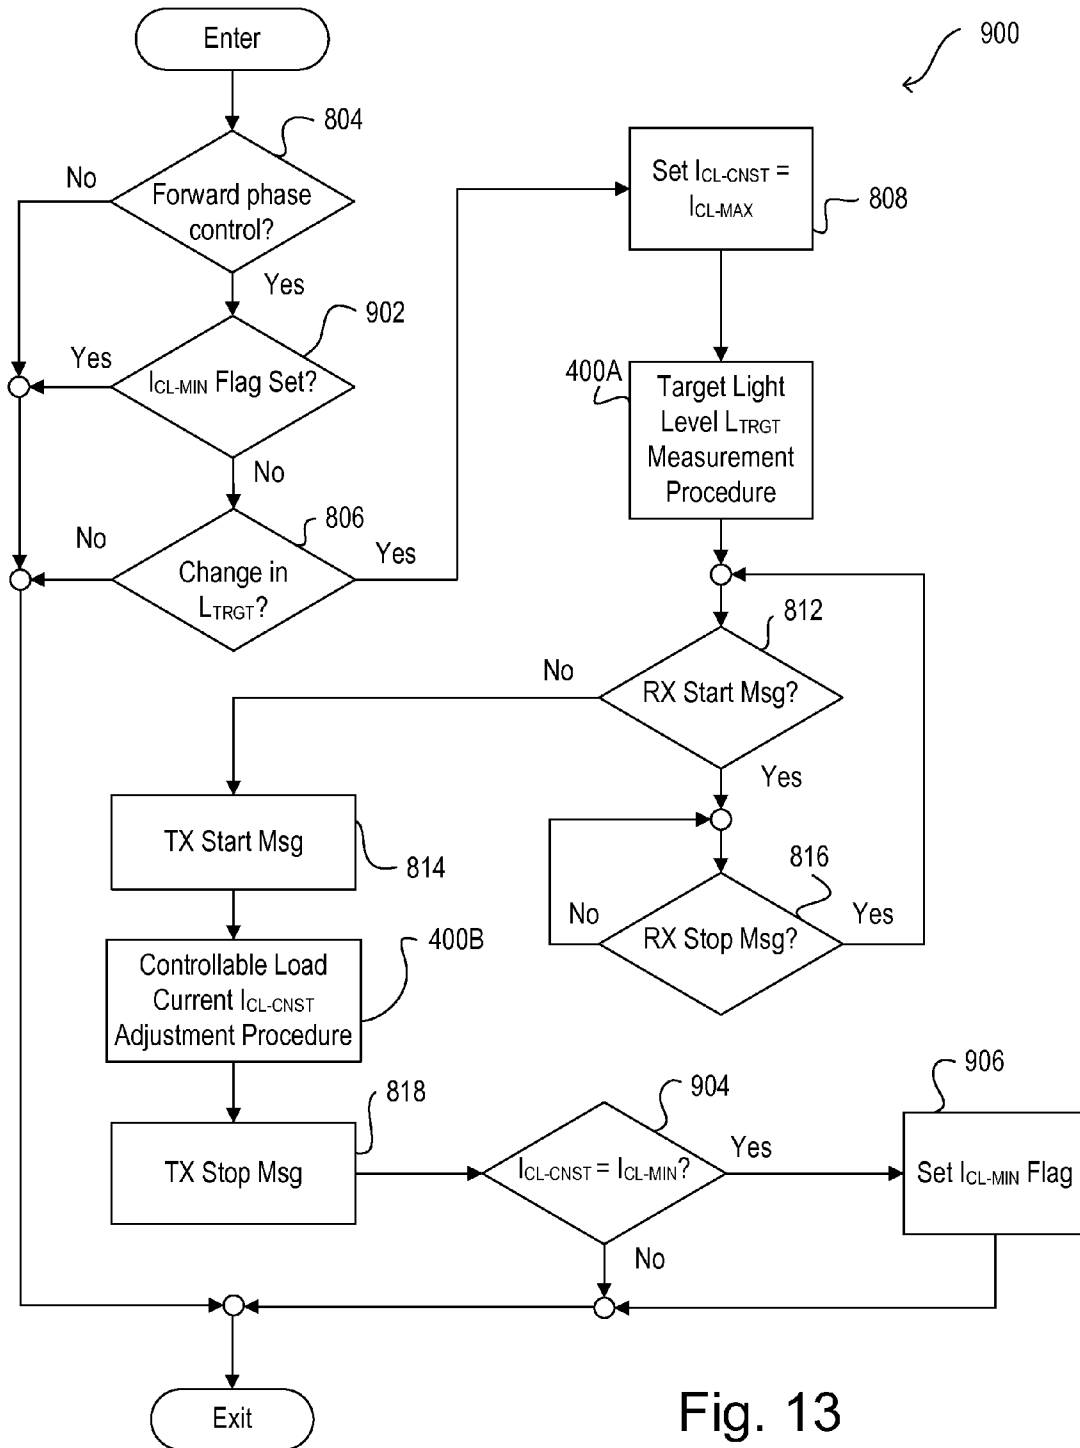


Fig. 12



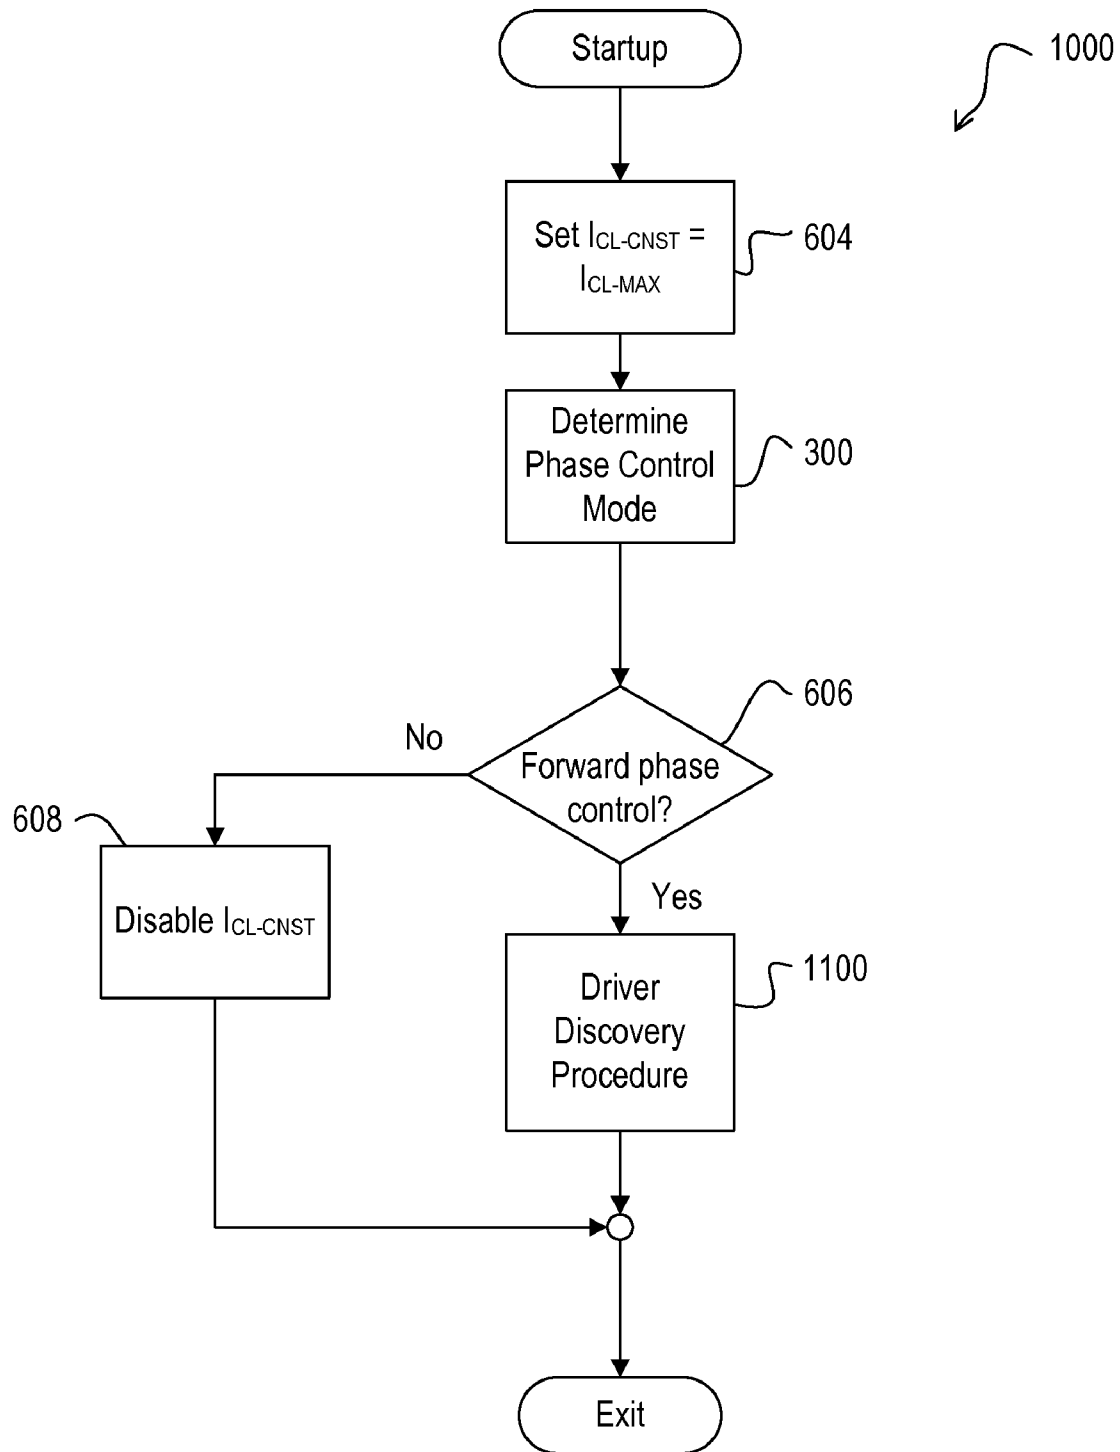


Fig. 14

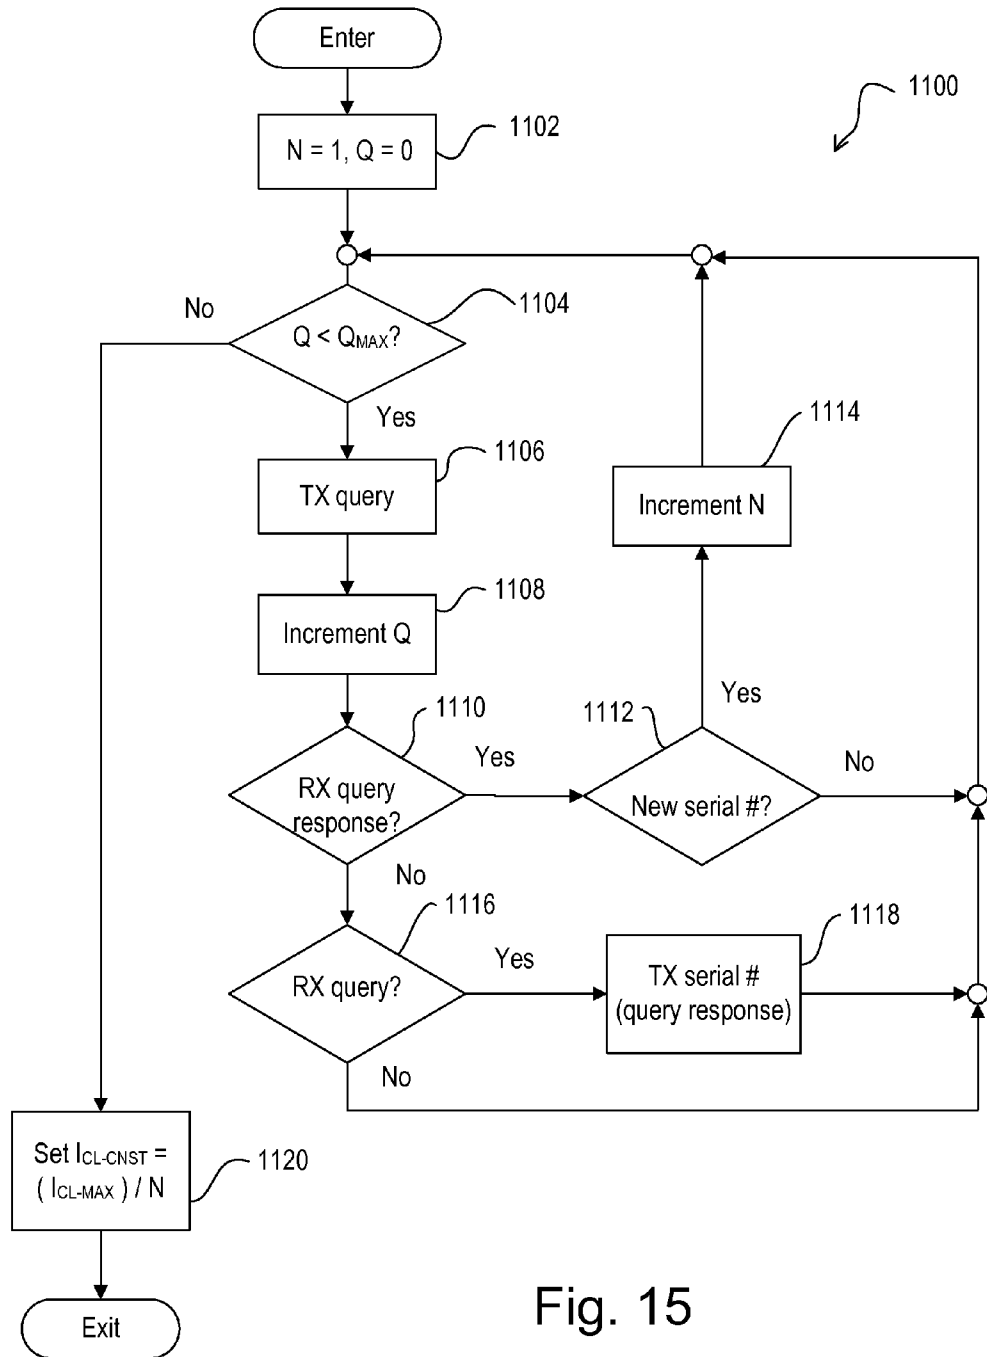


Fig. 15

CONTROLLABLE-LOAD CIRCUIT FOR USE WITH A LOAD CONTROL DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from commonly-assigned U.S. Provisional Patent Application Ser. No. 61/263,204, filed Nov. 20, 2009, entitled CONTROLLABLE-LOAD CIRCUIT FOR USE WITH A LOAD CONTROL DEVICE, the entire contents of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a load control device for a high-efficiency light source, such as a light-emitting diode (LED) light source or a compact fluorescent lamp, and more particularly, to a controllable-load circuit for use in an LED driver for controlling the intensity of an LED light source.

[0004] 2. Description of the Related Art

[0005] Light-emitting diode (LED) light sources are often used in place of or as replacements for conventional incandescent, fluorescent, or halogen lamps, and the like. LED light sources comprise a plurality of light-emitting diodes mounted on a single structure and provided in a suitable housing. LED light sources are typically more efficient and provide longer operational lives as compared to incandescent, fluorescent, and halogen lamps. In order to illuminate properly, an LED driver control device (i.e., an LED driver) is typically coupled between an alternating-current (AC) source and the LED light source for regulating the power supplied to the LED light source. The LED driver may regulate either the voltage provided to the LED light source to a particular value, the current supplied to the LED light source to a specific peak current value, or may regulate both the current and voltage.

[0006] LED drivers may be controlled by standard two-wire dimmer switches. A typical dimmer switch comprises a bidirectional semiconductor switch, e.g., a thyristor (such as a triac) or two field-effect transistors (FETs) in anti-series connection. The bidirectional semiconductor switch is coupled in series between the AC power source and the LED driver and is controlled to be conductive and non-conductive for portions of a half-cycle of the AC power source to thus control the amount of power delivered to the LED driver (e.g., using a phase-control dimming technique). A "smart" dimmer switch (i.e., a digital dimmer switch) comprises a microprocessor (or similar controller) for controlling the semiconductor switch and a power supply for powering the microprocessor. In order to properly charge, the power supply of a two-wire dimmer switch must conduct a charging current I_{CHRG} from the AC power source through the LED driver when the bidirectional semiconductor switch of the dimmer switch is non-conductive each half-cycle to provide an appropriate amount of voltage to the microprocessor (and any other low voltage circuitry).

[0007] Generally, dimmer switches use either a forward phase-control dimming technique or a reverse phase-control dimming technique in order to control when the bidirectional semiconductor switch is rendered conductive and non-conductive to thus control the power delivered to the LED driver. With forward phase-control dimming, the bidirectional semiconductor switch is turned on at some point within each AC

line voltage half-cycle and remains on until the end of the half cycle. Forward phase-control dimming is often used to control the power delivered to a resistive or inductive load, which may include, for example, a magnetic low-voltage transformer or an incandescent lamp. Since a triac becomes non-conductive when the magnitude of the current conducted through the triac decreases to approximately zero amps, triacs are typically used for forward phase-control dimming. With reverse phase-control dimming, the bidirectional semiconductor switch is turned on at the zero-crossing of the AC line voltage and turned off at some point within each half-cycle of the AC line voltage. Reverse phase-control dimming is often used to control the power delivered to a capacitive load, which may include, for example, an electronic low-voltage transformer. Since the bidirectional semiconductor switch must be rendered conductive at the beginning of the half-cycle, and must be able to be turned off within the half-cycle, reverse phase-control dimming typically requires that the dimmer switch have two FETs in anti-serial connection, or the like.

[0008] As previously mentioned, the bidirectional semiconductor switch of the dimmer switch may be implemented as a thyristor, such as a triac or two silicon-controlled rectifiers (SCRs) coupled in anti-parallel connection. Thyristors are typically characterized by a rated latching current and a rated holding current. The current conducted through the main terminals of the thyristor must exceed the latching current for the thyristor to become fully conductive. In addition, the current conducted through the main terminals of the thyristor must remain above the holding current for the thyristor to remain in full conduction. However, when a dimmer switch is controlling a high-efficiency electrical load, such as an LED light source, the current conducted through the main terminals of the thyristor may likely not exceed the rated latching current or the rated holding current.

[0009] Some prior art lighting control systems for LED light engines have included additional load circuits coupled in parallel with the LED light engines for conducting enough current to ensure that the latching current and holding current of the thyristor in the dimmer switch are exceeded. In addition, the load circuit may also conduct the charging current of the power supply of the dimmer switch to ensure that the power supply is able to stay charged. The load circuit may comprise, for example, a fixed load, such as a resistor, or a variable load circuit that can provide two different load characteristics during each half-cycle. An example of a prior art variable load circuit is described in greater detail in co-pending, commonly-assigned U.S. patent application Ser. No. 12/438,587, filed Feb. 24, 2009, entitled VARIABLE LOAD CIRCUITS FOR USE WITH LIGHTING CONTROL DEVICES, the entire disclosure of which is hereby incorporated by reference. The prior art load circuits conduct current through the connected dimmer switches at all times when the load circuits are installed. However, it may not be necessary for the load circuits to conduct the current through the dimmer switch at all times. In other words, the prior art load circuits may unnecessarily waste power by conducting current through the dimmer switch when not required. Therefore, there is a need for a controllable-load circuit that is able to conduct the appropriate amount of current through the connected dimmer switch only when needed.

SUMMARY OF THE INVENTION

[0010] According to a first embodiment of the present invention, a load control device for controlling the amount of

power delivered from an AC power source to an electrical load comprises a load control circuit, a controller, and a controllable-load circuit operable to conduct a controllable-load current having a constant magnitude that may be adjusted by the controller. The load control device is adapted to be coupled to the AC power source through a dimmer switch, such that the controllable-load current is conducted from the AC power source through the dimmer switch. The load control circuit is adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load. The controller is coupled to the load control circuit for controlling the amount of power delivered to the electrical load in response to a conduction time of a phase-control voltage received from the dimmer switch. The controller is operable to monitor the conduction time of the phase-control voltage and to cause the controllable-load circuit to decrease the constant magnitude of the controllable-load current from an initial magnitude to a decreased magnitude, such that the conduction time of the phase-control voltage when the controllable-load current has the decreased magnitude is the same as when the controllable-load current has the initial magnitude.

[0011] According to a second embodiment of the present invention, a load control system for controlling the amount of power delivered from an AC power source to an electrical load comprises a load control device and a dimmer switch. The load control device is adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load. The dimmer switch comprises a thyristor coupled in series electrical connection between the AC power source and the load control device, and the thyristor is characterized by a rated holding current and is operable to conduct a load current from the AC power source to the load control device. The dimmer switch is operable to generate a phase-control voltage that is provided to the load control device, such that the load control device is operable to adjust the amount of power being delivered to the electrical load in response to a conduction time of the phase-control voltage. The load control device is operable to conduct a controllable-load current from the AC power source through the thyristor of the dimmer switch, the controllable-load current having a constant magnitude for at least a portion of each half-cycle of the AC power source. The load control device is operable to decrease the constant magnitude of the controllable-load current from an initial magnitude to a decreased magnitude, such that the decreased magnitude of the load current conducted through the thyristor exceeds the rated holding current.

[0012] According to a third embodiment of the present invention, a load control system for controlling the amount of power delivered from an AC power source to first and second electrical loads, comprises a first load control device, a second load control device, and a dimmer switch. The first load control device is adapted to be coupled to the first electrical load for controlling the amount of power delivered to the first electrical load, and the second load control device is adapted to be coupled to the second electrical load for controlling the amount of power delivered to the second electrical load. The dimmer switch comprises a thyristor coupled in series electrical connection between the AC power source and the first and second load control devices, and the thyristor characterized by a rated holding current and operable to conduct a load current from the AC power source to the first and second load control devices. The dimmer switch is operable to generate a phase-control voltage that is provided to the first and second

load control device, such that the first and second load control devices are operable to adjust the amount of power being delivered to the respective electrical loads in response to a conduction time of the phase-control voltage. The load control devices are operable to conduct respective controllable-load currents from the AC power source through the thyristor of the dimmer switch, and each controllable-load current has a constant magnitude for at least a portion of each half-cycle of the AC power source. The load control devices are each operable to adjust the constant magnitude of the respective controllable-load current from an initial magnitude to a decreased magnitude, such that a total magnitude of the respective controllable-load currents exceeds the rated holding current when the controllable-load currents have the respective decreased magnitudes.

[0013] According to a fourth embodiment of the present invention, a load control device controls the amount of power delivered from an AC power source to an electrical load and is adapted to be coupled to the AC power source through a dimmer switch. The load control device comprises a load control circuit adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load, and a controller coupled to the load control circuit for controlling the amount of power delivered to the electrical load in response to a phase-control voltage received from the dimmer switch. The controller is operable to determine whether the phase-control voltage comprises a forward phase-control waveform or a reverse phase-control waveform such that the controller is operable to operate in a first mode when the phase-control voltage is a forward phase-control waveform, and to operate in a second mode when the phase-control voltage is a reverse phase-control waveform.

[0014] According to a fifth embodiment of the present invention, a load control device for controlling the amount of power delivered from an AC power source to an electrical load comprises a load control circuit, a controller, and a controllable-load circuit operable to conduct a controllable-load current from the AC power source through a dimmer switch, which is adapted to be coupled between the AC power source and the load control device. The load control circuit is adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load. The controller is coupled to the load control circuit for controlling the amount of power delivered to the electrical load in response to a phase-control voltage received from the dimmer switch. The controller is operable to determine whether the phase-control voltage comprises a forward phase-control waveform or a reverse phase-control waveform. The controller is coupled to the controllable-load circuit to enable the controllable-load circuit, such that the controllable-load circuit conducts the controllable-load current through the dimmer switch when the phase-control voltage is a forward phase-control waveform. The controller is further operable to disable the controllable-load circuit, such that the controllable-load circuit does not conduct the controllable-load current through the dimmer switch when the phase-control voltage is a reverse phase-control waveform.

[0015] In addition, a controllable-load circuit for drawing a selected current from a power source is described herein. The controllable-load circuit comprises: (1) a first semiconductor switch having a control input coupled to the power source; (2) a first impedance-forming circuit connected in series with the first semiconductor switch across the power source; (3) a control circuit having an output coupled to a first input of the

first impedance-forming circuit for selecting between at least two impedances to be connected in series with the first semiconductor switch; and (4) a second circuit coupled to the first semiconductor switch for monitoring the power source and for increasing the impedance to current flowing from the power source through the first semiconductor switch at a selected voltage level of the power source, thereby to reduce the current through the first semiconductor switch. The control circuit controls the impedance of the impedance forming circuit to automatically control the current through the first semiconductor switch so that it is at a predefined level.

[0016] Other features and advantages of the present invention will become apparent from the following description of the invention that refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The invention will now be described in greater detail in the following detailed description with reference to the drawings in which:

[0018] FIG. 1A is a simplified block diagram of a load control system including a digital dimmer switch and an LED driver for controlling the intensity of an LED light source according to a first embodiment of the present invention;

[0019] FIG. 1B is a simplified block diagram of an alternative load control system including an analog dimmer switch and an LED driver for controlling the intensity of an LED light source according to the first embodiment of the present invention;

[0020] FIG. 2A is an example waveform of a forward phase-control waveform;

[0021] FIG. 2B is an example waveform of a reverse phase-control waveform;

[0022] FIG. 3 is a simplified block diagram of the LED driver of FIGS. 1A and 1B;

[0023] FIG. 4 is a simplified diagram of the controllable-load current drawn by the controllable-load circuit of the LED driver of FIG. 3 when the received phase-control voltage is a forward phase-control waveform;

[0024] FIG. 5 is a simplified schematic diagram of the controllable-load circuit of the LED driver of FIG. 3;

[0025] FIG. 6 is a simplified flowchart of a startup procedure executed by a control circuit of the LED driver of FIG. 3 when power is first applied to the LED driver;

[0026] FIG. 7 is a simplified flowchart of a phase control determination procedure executed by the control circuit of the LED driver of FIG. 3;

[0027] FIG. 8 is a simplified flowchart of a controllable load current procedure executed periodically by the control circuit of the LED driver of FIG. 3;

[0028] FIG. 9 is a simplified flowchart of a target light level measurement procedure executed by the control circuit of the LED driver of FIG. 3 in response to changes of a target intensity;

[0029] FIG. 10 is a simplified flowchart of a controllable load current adjustment procedure executed by the control circuit of the LED driver of FIG. 3 in response to changes of a target intensity;

[0030] FIG. 11 is a simplified block diagram of a load control system including a dimmer switch and multiple LED drivers for controlling the intensity of respective LED light sources according to a second embodiment of the present invention;

[0031] FIG. 12 is a simplified flowchart of a controllable-load current procedure executed by a control circuit of the LED driver according to a third embodiment of the present invention;

[0032] FIG. 13 is a simplified flowchart of a controllable-load current procedure executed by a control circuit of the LED driver according to a fourth embodiment of the present invention;

[0033] FIG. 14 is a simplified flowchart of a startup procedure executed by a control circuit of the LED driver according to a fifth embodiment of the present invention when power is first applied to the LED driver; and

[0034] FIG. 15 is a simplified flowchart of an LED driver discovery procedure executed by a control circuit of the LED driver according to the fifth embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0035] The foregoing summary, as well as the following detailed description of the preferred embodiments, is better understood when read in conjunction with the appended drawings. For the purposes of illustrating the invention, there is shown in the drawings an embodiment that is presently preferred, in which like numerals represent similar parts throughout the several views of the drawings, it being understood, however, that the invention is not limited to the specific methods and instrumentalities disclosed.

[0036] FIG. 1A is a simplified block diagram of a load control system **100** including a light-emitting diode (LED) driver **102** for controlling the intensity of an LED light source **104** (e.g., an LED light engine) according to a first embodiment of the present invention. The LED driver **102** is coupled to an alternating-current (AC) power source **106** via a dimmer switch **108** (e.g., a two-wire “digital” or “smart” dimmer switch as shown in FIG. 1A). The dimmer switch **108** as shown in FIG. 1A does not require a connection to the neutral side N of the AC power source **106**. Alternatively, the dimmer switch **108** may comprise a three-wire dimmer switch which would require a connection to the neutral side N of the AC power source. The dimmer switch **108** generates a phase-control voltage V_{PC} (e.g., a dimmed-hot voltage), which may comprise a forward phase-control waveform, i.e., a leading-edge phase-control voltage (as shown in FIG. 2A), or a reverse phase-control waveform, i.e., a trailing-edge phase-control voltage (as shown in FIG. 2B). The LED driver **102** is coupled to the dimmer switch **108** (for receipt of the phase-control voltage V_{PC}) and to the neutral side N of the AC power source **106**. The LED driver **102** is operable to control the intensity of the LED light source **104** in response to the phase-control voltage V_{PC} . The dimmer switch **108** comprises a user interface **108A** including an intensity adjustment actuator (not shown), such as a slider control or a rocker switch, for allowing a user to adjust the intensity of the LED light source **104**.

[0037] The dimmer switch **108** comprises a bidirectional semiconductor switch **108B**, such as, for example, a thyristor (such as a triac) or two field-effect transistors (FETs) coupled in anti-series connection, for generating the phase-controlled voltage V_{PC} . Using a standard phase-control dimming technique, a dimmer switch control circuit **108C** renders the bidirectional semiconductor switch **108B** conductive at a specific time each half-cycle of the AC power source, such that the bidirectional semiconductor switch remains conductive for a conduction period T_{CON} during each half-cycle of the AC

power source **106**. The LED driver **102** controls the amount of power delivered to the LED light source **104** in response to the phase-controlled voltage V_{PC} provided by the dimmer switch **108**. The LED driver **102** is operable to turn the LED light source **104** on and off in response to the conductive period T_{CON} of the phase-control voltage V_{PC} received from the dimmer switch **108**. In addition, the LED driver **102** is operable to adjust the intensity of the LED light source **104** to a target intensity L_{TRGT} , which ranges between a low-end intensity L_{LE} (e.g., approximately 1%) and a high-end intensity L_{HE} (e.g., approximately 100%) in response to the phase-control voltage V_{PC} . Specifically, the LED driver **102** controls at least one of a load voltage V_{LOAD} across the LED light source **104** or a load current I_{LOAD} through the LED light source to control the amount of power delivered to the LED light source.

[0038] The dimmer switch **108** also often comprises a power supply **108D** coupled across the bidirectional semiconductor switch **108B** for powering the control circuit **108C**. The power supply **108D** generates a DC supply voltage V_{PS} by drawing a charging current I_{CHRG} from the AC power source **106** through the LED driver **102** when the bidirectional semiconductor switch **108B** is non-conductive each half-cycle. Examples of digital dimmer switches having power supplies are described in greater detail in U.S. Pat. No. 5,248,919, issued Sep. 29, 1993, entitled LIGHTING CONTROL DEVICE, and in U.S. Pat. No. 6,969,959, issued Nov. 29, 2005, entitled ELECTRONIC CONTROL SYSTEMS AND METHODS, the entire disclosures of which are hereby incorporated by reference.

[0039] FIG. 1B is a simplified block diagram of an alternative load control system **100'** comprising a two-wire "analog" dimmer switch **108'** for controlling the intensity of the LED light source **104** through the LED driver **102**. The analog dimmer switch **108'** includes a timing circuit **108E** and a trigger circuit **108F** rather than the dimmer control circuit **108C** and the power supply **108D** of the digital dimmer switch **108** of FIG. 1A. As shown in FIG. 1B, the bidirectional semiconductor switch **108B** of the analog dimmer switch **108'** is implemented as a triac **T1**. The timing circuit **108E** is coupled in parallel electrical connection with the triac **T1** and comprises, for example, a resistor **R1** and a capacitor **C1**. The trigger circuit **108F** is coupled between a gate of the triac **T1** and the junction of the resistor **R1** and the capacitor **C1**, and comprises, for example, a diac **D1**. The capacitor **C1** of the timing circuit **108E** charges by conducting a timing current I_{TIM} from the AC power source **106** and through the resistor **R1** and the LED driver **102** when the triac **T1** is non-conductive each half-cycle. When the voltage across the capacitor **C1** exceeds approximately a break-over voltage of the diac **D1**, the diac conducts current through the gate of the triac **T1**, thus, rendering the triac conductive for the conduction period T_{CON} . After the triac **T1** is fully conductive, the timing current I_{TIM} ceases to flow. As shown in FIG. 1B, the resistor **R1** is a potentiometer having a resistance adjustable in response to the user interface **108A** to control how quickly the capacitor **C1** charges and thus the conduction period T_{CON} of the phase-controlled voltage V_{PC} .

[0040] FIG. 3 is a simplified block diagram of the LED driver **102** according to the first embodiment of the present invention. The LED driver **102** comprises a radio-frequency interference (RFI) filter and rectifier circuit **110**, which receives the phase-control voltage V_{PC} from the dimmer switch **108**. The RFI filter and rectifier circuit **110** operates to

minimize the noise provided on the AC power source **106** and to generate a rectified voltage V_{RECT} . A buck-boost flyback converter **120** receives the rectified voltage V_{RECT} and generates a direct-current (DC) bus voltage V_{BUS} across a bus capacitor C_{BUS} . The flyback converter **120** may alternatively comprise any suitable power converter circuit for generating an appropriate bus voltage. The flyback converter **120** may also provide electrical isolation between the AC power source **106** and the LED light source **104**, and operate as a power factor correction (PFC) circuit to adjust the power factor of the LED driver **102** towards a power factor of one. The LED driver **102** comprises an LED drive circuit **130** comprising a switching power supply such as a convertor or alternatively, a linear regulator, which receives the bus voltage V_{BUS} and controls the amount of power delivered to the LED light source **104** so as to control the intensity of the LED light source. An example of an LED drive circuit is described in greater detail in U.S. patent application Ser. No. 12/813,908, filed Jun. 11, 2010, entitled LOAD CONTROL DEVICE FOR A LIGHT-EMITTING DIODE LIGHT SOURCE, the entire disclosure of which is hereby incorporated by reference.

[0041] The LED driver **102** further comprises a control circuit **140** for controlling the operation of the LED drive circuit **130**. The control circuit **140** may comprise, for example, a microcontroller or any other suitable processing device or controller, such as, for example, a programmable logic device (PLD), a microprocessor, or an application specific integrated circuit (ASIC). A resistive divider comprising two resistors **R142**, **R144** is coupled across the output of the RFI filter and rectifier circuit **110** and generates a scaled phase-control voltage control signal V_{PC-S} , which is provided to the control circuit **140**. The scaled phase-control voltage control signal V_{PC-S} is representative of the magnitude of the phase-control voltage V_{PC} received from the dimmer switch **108**. The control circuit **140** is operable to determine the conduction period T_{CON} of the phase-control voltage V_{PC} (and thus the target intensity L_{TRGT} of the LED light source **104**) from the scaled phase-control voltage control signal V_{PC-S} .

[0042] The LED drive circuit **130** controls a peak magnitude I_{PK} of a load current I_{LOAD} conducted through the LED light source **104** in response to a peak current control signal V_{IPK} . The control circuit **140** receives a load current feedback signal V_{ILOAD} , which is representative of the magnitude of the load current I_{LOAD} flowing through the LED light source **104**. The control circuit **140** also receives a LED voltage feedback signal $V_{LED-NEG}$, which is representative of the magnitude of the voltage at the negative terminal of the LED light source **104**.

[0043] The control circuit **140** is operable to control the LED drive circuit **130**, such that the LED driver **102** is adapted to work with a plurality of different LED light sources, which may be rated to operate using different load control techniques, different dimming techniques, and different magnitudes of load current and voltage. Specifically, the control circuit **140** is operable to control the LED drive circuit **130** to control the amount of power delivered to the LED light source **104** using the two different modes of operation: a current load control mode (i.e., for using a current load control technique) and a voltage load control mode (i.e., for using a voltage load control technique). In addition, the control circuit **140** may also adjust the magnitude to which the LED drive circuit **130** will control the load current I_{LOAD} through

the LED light source **104** in the current load control mode, or the magnitude to which the LED driver **102** will control the load voltage V_{LOAD} across the LED light source **104** in the voltage load control mode. When operating in the current load control mode, the control circuit **140** is operable to control the intensity of the LED light source **104** using two different dimming techniques: a pulse-width modulation (PWM) dimming technique and a constant current reduction (CCR) dimming technique. When operating in the voltage load control mode, the control circuit **140** is only operable to adjust the amount of power delivered to the LED light source **104** using the PWM dimming technique.

[0044] The LED driver **102** also comprises a power supply **150**, which receives the rectified voltage V_{RECT} and generates a direct-current (DC) supply voltage V_{CC} for powering the control circuit **140** and other low-voltage circuitry of the LED driver. The control circuit **140** is also coupled to a memory **160** for storing the operational characteristics of the LED driver **102** (e.g., the load control mode, the dimming mode, and the magnitude of the rated load voltage or current). The LED driver **102** may also comprise a communication circuit **170**, which may be coupled to, for example, a wired communication link or a wireless communication link, such as a radio-frequency (RF) communication link or an infrared (IR) communication link. The control circuit **140** may be operable to update the target intensity I_{TRGT} of the LED light source **104** or the operational characteristics stored in the memory **160** in response to digital messages received via the communication circuit **170**.

[0045] The LED driver **102** further comprises a controllable-load circuit **180** coupled to the output of the RFI filter and rectifier circuit **110** for receipt of the rectified voltage V_{RECT} . The controllable-load circuit **180** is operable to draw a controllable-load current I_{CL} through the dimmer switch **108** to ensure that the current conducted through the thyristor of the dimmer switch exceeds the rated latching and holding currents of the thyristor. The control circuit **140** provides a controllable-load enable control signal V_{CL-EN} to the controllable-load circuit **180** for enabling and disabling the conduction of the controllable-load current I_{CL} , through the dimmer switch **108**. Specifically, the control circuit **140** is operable to enable the controllable-load circuit **180** to conduct the controllable-load current I_{CL} , when the phase-control voltage V_{PC} is a forward phase-control waveform, and to disable the controllable-load circuit **180** when the phase-control voltage V_{PC} is a reverse phase-control waveform. In addition, the control circuit **140** provides a plurality of controllable-load adjustment control signals $V_{CL-ADJ1}$, $V_{CL-ADJ2}$, V_{CL-ADB} , $V_{CL-ADJ4}$ for adjusting the magnitude of the controllable-load current I_{CL} as will be described in greater detail below. In addition, the controllable-load circuit **180** may be operable to conduct the charging current I_{CHRG} of the power supply **108D** of the dimmer switch **108** each half-cycle (i.e., the controllable-load circuit may provide a path for the charging current of the power supply to flow).

[0046] FIG. 4 is a simplified diagram of the controllable-load current I_{CL} drawn by the controllable-load circuit **180** each half-cycle of the AC power source **106** when the phase-control voltage V_{PC} is a forward phase-control waveform received from the dimmer switch **108**. After the thyristor of the dimmer switch **108** is rendered conductive (at the beginning of a first period T_1 of FIG. 4), the voltage across the LED driver **102** and thus, the rectified voltage V_{RECT} quickly increase in magnitude. During the first period T_1 of each

half-cycle, the controllable-load circuit **180** conducts a pulse of current that has a magnitude dependent upon the instantaneous magnitude of the rectified voltage V_{RECT} , which exceeds the rated latching current of the thyristor of the dimmer switch **108** to ensure that the thyristor latches. During a second period T_2 of the half-cycle, the controllable-load circuit **180** operates as a constant current sink to draw a constant current $I_{CL-CNST}$, which has a magnitude that exceeds the rating holding current of the thyristor to ensure that the thyristor remains conductive. The magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} , during the second period T_2 is less than the controllable-load current I_{CL} , during the first period T_1 and is not needlessly large resulting in unnecessary power dissipation in the controllable-load circuit **180** each half-cycle. The control circuit **140** is operable to control the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} during the second period T_2 using the controllable-load adjustment control signals $V_{CL-ADJ1}$ - $V_{CL-ADJ4}$. During a final, third period T_3 of each half-cycle, the magnitude of the controllable-load current I_{CL} is not limited to the constant current $I_{CL-CNST}$ and decreases as the magnitude of the rectified voltage V_{RECT} decreases.

[0047] FIG. 5 is a simplified schematic diagram of the controllable-load circuit **180**. As previously noted, the controllable-load circuit **180** receives the rectified voltage V_{RECT} from the RFI filter and rectifier circuit **110**. The controllable-load circuit **180** comprises a semiconductor switch, e.g., a field-effect transistor (FET) **Q210**, for conducting the controllable-load current I_{CL} when the FET **Q210** is conductive. The drain of the FET **Q210** is coupled to the rectified voltage V_{RECT} through a resistor **R212** (e.g., having a resistance of approximately 330 Ω). The gate of the FET **Q210** is coupled to an energy-storage capacitor **C214** (e.g., having a capacitance of approximately 0.044 μ F) via two resistors **R216**, **R218** (e.g., having resistances of approximately 22 k Ω and 100 k Ω , respectively). The FET **Q210** is rendered conductive when the voltage at the gate of the FET exceeds the rated gate voltage of the FET. The capacitor **C214** charges from the rectified voltage V_{RECT} through a diode **D220** and a resistor **R222** (e.g., having a resistance of approximately 100 k Ω), and operates to maintain the appropriate gate voltage at the gate of the FET **Q210** independent of the instantaneous magnitude of the rectified voltage V_{RECT} . A capacitor **C224** (e.g., having a capacitance of approximately 0.047 μ F) and a zener diode **Z225** are coupled between the gate and the source of the FET **Q210**.

[0048] The controllable-load circuit **180** further comprises an NPN bipolar junction transistor (BJT) **Q226** coupled between the gate of the FET **Q210** and circuit common. The controllable-load enable control signal V_{CL-EN} is coupled to the base of the transistor **Q226** via a resistor **R228** (e.g., having a resistance of approximately 100 k Ω). When the control circuit **140** drives the controllable-load enable control signal V_{CL-EN} high (i.e., to approximately the DC supply voltage V_{CC}), the transistor **Q226** is rendered conductive, thus pulling the gate of the FET **Q210** down towards circuit common. Accordingly, the FET **Q210** is rendered non-conductive and the conduction of the controllable-load current I_{CL} is disabled. When the control circuit **140** drives the controllable-load enable control signal V_{CL-EN} low (i.e., to approximately circuit common), the transistor **Q226** is rendered non-conductive and the FET **Q210** operates to conduct

the controllable-load current I_{CL} , (i.e., the conduction of the controllable-load current I_{CL} , is enabled).

[0049] The source of the FET Q210 is coupled to circuit common via a plurality of resistors R230, R232, R234, R236 and respective NPN bipolar junction transistors Q240, Q242, Q244, Q246 to create an impedance-forming circuit. The bases of the transistors Q240, Q242, Q244, Q246 are coupled to respective resistors R250, R252, R254, R256, which each have a resistance, for example, of approximately 100 k Ω . The controllable-load adjustment control signals $V_{CL-ADJ1}$ - $V_{CL-ADJ4}$ are coupled to the bases of the respective transistors Q240-Q246 via the respective resistors R250-R256. The control circuit 140 is operable to control the controllable-load adjustment control signals $V_{CL-ADJ1}$ - $V_{CL-ADJ4}$; for example, in a digital manner in order to provide fifteen different magnitudes of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} during the second period T_2 of each half-cycle as will be described in greater detail below. For example, the first resistor R230 may have a resistance of approximately 25 Ω , the second resistor R232 may have a resistance of approximately 50 Ω , the third resistor R234 may have a resistance of approximately 100 Ω , and the fourth resistor R236 may have a resistance of approximately 200 Ω . The control circuit 140 controls at least one of the transistors Q240-Q246 to be conductive at all times, but may control more than one of the transistors to be conductive to couple two or more of the resistors R230-R236 in parallel. Accordingly, the impedance provided between the source of the FET Q210 and circuit common may range between approximately a minimum resistance R_{MIN} (e.g., approximately 13.33 Ω) when all of the transistors Q240-Q246 are conductive, and a maximum resistance R_{MAX} (e.g., approximately 200 Ω) when only the fourth transistor Q246 is conductive.

[0050] Two NPN bipolar junction transistors Q260, Q262 are coupled in series between the junction of the resistors R216, R218 and circuit common. The base of the first transistor Q260 is coupled to the source of the FET Q210 via a resistor R264 (e.g., having a resistance of approximately 1 k Ω) and to circuit common via a resistor R266 (e.g., having a resistance of approximately 1 k Ω). The first transistor Q260 operates to control the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} conducted through the FET Q210 during the second period T_2 of each half-cycle as will be described in greater detail below.

[0051] The second transistor Q262 is controlled to be conductive and non-conductive in response to the magnitude of the rectified voltage V_{RECT} to control when the first transistor Q260 limits the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} . A resistive divider comprising two resistors R268, R270 is coupled across the output of the RFI filter and rectifier circuit 110 and generates a scaled version of the rectified voltage V_{RECT} . A capacitor C272 is coupled in parallel with the resistor R270 and has a capacitance of, for example, approximately 47 pF. The base of the transistor Q262 is coupled to the junction of the two resistors R268, R270 through a zener diode Z274 and to circuit common through a resistor R276 (e.g., having a resistance of approximately 100 k Ω). For example, the resistors R268, R270 of the resistive divider may have resistances of approximately 2 M Ω and 392 k Ω , respectively, and the zener diode Z274 may have a breakover voltage of approximately 5.6 V.

[0052] When the phase-control voltage V_{PC} received by the LED driver 102 is a forward phase-control waveform (as shown in FIG. 4), the controllable-load circuit 180 may not

begin to conduct the controllable-load current I_{CL} , at the beginning of each half-cycle of the AC power source 106 since the magnitude of the rectified voltage V_{RECT} may be approximately zero volts at this time and the capacitor C214 may not be charged to an appropriate voltage to render the FET Q210 conductive. When the thyristor of the dimmer switch 108 is rendered conductive (at the beginning of the first period of time T_1), the magnitude of the rectified voltage V_{RECT} increases and the capacitor C214 charges quickly, such that the I-FET Q210 is driven into saturation and the controllable-load circuit 180 begins to conduct the controllable-load current I_{CL} . The controllable-load circuit 180 operates to conduct enough current through the thyristor of the dimmer switch 108 to exceed the rated latching current of the thyristor during the first period of time T_1 . At the beginning of the first period T_1 , the capacitor C272 also begins to charge through the resistor R268. The transistor Q262 is rendered conductive when the magnitude of the voltage across the capacitor C272 exceeds the rated base-emitter voltage of the transistor for the duration of the second period of time T_2 . Accordingly, the length of the first period T_1 is thus determined by the amount of time required to charge the capacitor C272 to the rated base-emitter voltage of the transistor Q262. Similarly, as the magnitude of the rectified voltage V_{RECT} decreases, the magnitude of the voltage across the capacitor C272 drops below the rated base-emitter voltage of the transistor Q262, thus rendering the transistor non-conductive at the beginning of the third period of time T_3 such that the FET Q210 is driven into saturation once again at the end of the half cycle.

[0053] When the transistor Q262 is rendered conductive, the transistor Q260 controls the magnitude of the controllable-load current I_{CL} to the constant current $I_{CL-CNST}$ during the second period of time T_2 in order to conduct enough current through the thyristor of the dimmer switch 108 to exceed the rated holding current of the thyristor. During the second period of time T_2 , the transistor Q260 operates in the linear region and pulls the gate voltage of the FET Q210 down towards circuit common, thus causing the FET Q210 to also operate in the linear region. The magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} is dependent upon the impedance provided between the source of the FET Q210 and circuit common. Accordingly, the control circuit 140 is operable to selectively render the transistors Q240-Q246 conductive and non-conductive to adjust the impedance provided between the source of the FET Q210 and circuit common, and thus to control the magnitude of the constant current $I_{CL-CNST}$ to one of the fifteen different discrete magnitudes.

[0054] The magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} is controlled to a maximum current I_{CL-MAX} (e.g., approximately 50 mA) when the impedance provided between the source of the FET Q210 and circuit common is the minimum resistance R_{MIN} (i.e., when all of the transistors Q240-Q246 are rendered conductive and all of the resistors R230-R236 are coupled in parallel). The magnitude of the constant current $I_{CL-CNST}$ is controlled to a minimum current I_{CL-MIN} (e.g., approximately 3.5 mA) when the impedance provided between the source of the FET Q210 and circuit common is a maximum resistance (i.e., when only the transistor Q246 is rendered conductive and only the resistor R236 is coupled between the source of the FET Q210 and circuit common). The control circuit 140 controls at least one of the transistors Q240-Q246 to be conductive at all times, but

may control more than one of the transistors to be conductive to coupled two or more of the resistors R230-R236 in parallel. The control circuit 140 is operable to turn off the conduction of the controllable-load current I_{CL} , by driving the controllable-load enable control signal V_{CL-EN} high and rendering the transistor Q226 conductive and the FET Q210 non-conductive.

[0055] Immediately after starting up (i.e., when power is first applied to the LED driver 102) when the dimmer switch 108 is on or immediately after the dimmer switch is first turned on, the control circuit 140 is operable to determine whether the phase-control voltage V_{PC} is a forward phase-control waveform or a reverse phase-control waveform. Specifically, the control circuit 140 monitors the magnitude of the phase-control voltage V_{PC} using the scaled phase-control voltage control signal V_{PC-S} to determine whether the phase-control voltage V_{PC} is a forward phase-control waveform or a reverse phase-control waveform. If the phase-control voltage V_{PC} is a forward phase-control waveform, the magnitude of the phase-control voltage will increase very quickly from approximately zero volts to a large magnitude at a specific time each half-cycle depending upon the length of the conduction period T_{CON} . If the phase-control voltage V_{PC} is a reverse phase-control waveform, the magnitude of the phase-control voltage will increase slowly from approximately zero volts at the beginning of each half-cycle.

[0056] Therefore, after detecting a voltage transition of the phase-control voltage V_{PC} (i.e., when the phase-control voltage increases from approximately zero volts to be greater than zero volts), the control circuit 140 is operable to compare the magnitude of the phase-control voltage V_{PC} to a voltage threshold V_{TH} (e.g., approximately 38-40 volts). If the magnitude of the phase-control voltage V_{PC} is consistently larger than the voltage threshold V_{TH} , the control circuit 140 concludes that the phase-control voltage is a forward phase-control waveform and enables the conduction of the controllable-load current I_{CL} . Otherwise, the control circuit 140 concludes that the phase-control voltage is a reverse phase-control waveform and disables the conduction of the controllable-load current I_{CL} . Because reverse phase-control waveforms are typically generated by dimmer switches having FETs and FETs are not limited by latching or holding currents, there is no need to enable the controllable-load circuit 180 when the phase-control voltage is a reverse phase-control waveform.

[0057] FIG. 6 is a simplified flowchart of a startup procedure 600 executed by the control circuit 140 when power is first applied to the LED driver 102 at step 602. The control circuit 140 first enables the controllable load circuit 180 via the controllable-load enable control signal V_{CL-EN} and controls the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the maximum current I_{CL-MAX} (in the event that the phase-control voltage V_{PC} is a forward phase-control waveform.) Then, the control circuit 140 executes a phase control determination procedure 300 to determine whether the phase-control voltage V_{PC} from the dimmer switch 108 is a forward phase-control waveform or a reverse phase-control waveform as shown in FIG. 7 and described further below. Next, if the phase-control voltage V_{PC} is not a forward phase-control waveform (i.e., it is a reverse phase control waveform as shown in FIG. 2B) at step 606, then the control circuit 140 disables the controllable load circuit 180 via the controllable-load enable control signal V_{CL-EN} before the startup procedure 600 exits. If the phase-

control voltage V_{PC} is a forward phase-control waveform as shown in FIG. 2A, then the controllable load circuit 180 remains enabled before the startup procedure 600 exits.

[0058] FIG. 7 is a simplified flowchart of the phase control determination procedure 300 executed by the control circuit 140 of the LED driver 102. The control circuit 140 first initializes a number of counters s, m, n, h to zero at step 312, and then waits for the next voltage transition at step 314. Specifically, the control circuit 140 waits while the magnitude of the phase-control voltage V_{PC} (as determined from the scaled phase-control voltage control signal V_{PC-S}) is greater than a noise threshold V_{NOISE} (e.g., approximately 10 V) at step 314. When the magnitude of the phase-control voltage V_{PC} becomes less than or equal to the noise threshold V_{NOISE} at step 314, the control circuit 140 waits for the next sampling time at step 316 to sample the scaled phase-control voltage control signal V_{PC-S} . For example, the control circuit 140 may sample the scaled phase-control voltage control signal V_{PC-S} using a sampling period T_{SAMPLE} of approximately 35 μ sec. At the next sampling time at step 316, the control circuit 140 samples the scaled phase-control voltage control signal V_{PC-S} at step 318. The control circuit 140 continues to sample the scaled phase-control voltage control signal V_{PC-S} at step 318 until the magnitude of the phase-control voltage V_{PC} becomes greater than the noise threshold V_{NOISE} at step 320.

[0059] When the magnitude of the phase-control voltage V_{PC} rises above the noise threshold V_{NOISE} at step 320, the control circuit 140 samples the scaled phase-control voltage control signal V_{PC-S} a predetermined maximum number S_{MAX} of times (e.g., 10 samples) each half cycle over a predetermined number H_{MAX} of consecutive half-cycles (e.g., 10 half-cycles). If at least a first predetermined number M_{MAX} (e.g., approximately 7) of the samples are above the second voltage threshold V_{TH2} (i.e., approximately 38 V) for at least a second predetermined number N_{MAX} (e.g., approximately 7) of the half-cycles, the control circuit 140 concludes that the phase-control voltage V_{PC} generated by the dimmer switch 108 is a forward phase-control waveform and enables the controllable-load circuit 180. Otherwise, the control circuit 140 assumes that the phase-control voltage V_{PC} is a reverse phase-control waveform and disables the controllable-load circuit 180.

[0060] Referring back to FIG. 7, the control circuit 140 increments the counter s by one at step 322 in order to keep track of the number of times that the scaled phase-control voltage control signal V_{PC-S} has been sampled. If the magnitude of the phase-control voltage V_{PC} is greater than or equal to the voltage threshold V_{TH} at step 324, the control circuit 140 increments the counter m by one at step 326 to keep track of the number of samples greater than the voltage threshold V_{TH} . If the magnitude of the phase-control voltage V_{PC} is less than the voltage threshold V_{TH} at step 324, the control circuit 140 does not increment the counter m. If the value of the counter s is not equal to (i.e., is less than) the predetermined maximum number S_{MAX} of samples (i.e., 10) at step 328, the control circuit 140 waits for the correct time to sample the scaled phase-control voltage control signal V_{PC-S} at step 316 and once again samples the scaled phase-control voltage control signal V_{PC-S} at step 318 and determines if the magnitude of the phase-control voltage V_{PC} is greater than the voltage threshold V_{TH} at step 324.

[0061] When the value of the counter s has increased to the predetermined maximum number S_{MAX} of samples at step 328, the control circuit 140 increments the counter h by one at

step 330 to keep track of the number of consecutive half-cycles during which the control circuit has sampled the scaled phase-control voltage control signal V_{PC-S} . If the value of the counter m (i.e., the number of samples exceeding the voltage threshold V_{TH}) is greater than or equal to the value of the predetermined number M_{MAX} at step 332, the control circuit 140 increments the counter n by one at step 334. If the value of the counter h is not equal to (i.e., less than) the maximum number H_{MAX} (i.e., 10) of half-cycles at step 336, the control circuit 140 resets the counter s to zero at step 338 and then waits for the beginning of the next half-cycle at step 314.

[0062] If the counter h is equal to the maximum number H_{MAX} of half-cycles at step 336, the control circuit 140 determines if the value of the counter n (i.e., the number of half-cycles containing at least the first predetermined number M_{MAX} of samples exceeding the voltage threshold V_{TH}) is greater than or equal to the second predetermined number N_{MAX} at step 340. If so, the control circuit 140 determines that the phase-control voltage V_{PC} is a forward phase-control waveform and thus, begins to operate in a forward phase control mode at step 342. Specifically, when operating in forward phase control mode, the control circuit 140 drives the controllable-load enable control signal V_{CL-EN} low to enable the controllable-load circuit 180 at step 342, before the startup procedure 300 exits. If the value of the counter n is less than the second predetermined number N_{MAX} at step 340, the control circuit 140 determines that the phase-control voltage V_{PC} is a reverse phase-control waveform and thus, begins to operate in a reverse phase control mode at step 342. Specifically, when operating in reverse phase control mode, the control circuit drives the controllable-load enable control signal V_{CL-EN} high to disable the controllable-load circuit 180 at step 344, before the startup procedure 300 exits.

[0063] After the control circuit 140 has determined that the phase-control voltage V_{PC} is a forward phase-control waveform and has enabled the controllable-load circuit 180, the control circuit is operable to gradually reduce the magnitude of the constant current $I_{CL-CNST}$ drawn by the controllable-load circuit during the second period T_2 of each half-cycle until the control circuit determines the lowest current at which the dimmer switch 108 operates properly. The control circuit 140 monitors the conduction period T_{CON} of the phase-control voltage V_{PC} (via the scaled phase-control voltage control signal V_{PC-S}) to determine if changes in the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} affect the operation of the dimmer switch 108. Specifically, large variations in the conduction time T_{CON} may indicate that the operation of the dimmer switch 108 has been affected by the change in the constant current $I_{CL-CNST}$ drawn by the controllable-load circuit 180. If the control circuit 140 determines that the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} has been decreased too low, the control circuit increases the magnitude of the constant current $I_{CL-CNST}$ back to the last suitable level and stops adjusting the magnitude of the constant current $I_{CL-CNST}$.

[0064] FIG. 8 is a simplified flowchart of a controllable-load current procedure 700 executed periodically (e.g., once each line cycle) by the control circuit 140 of the LED driver 102. The control circuit 140 executes the controllable-load current procedure 700 to monitor changes of the target intensity L_{TRGT} (i.e., changes of the conduction period T_{CON} of the phase-control voltage V_{PC}) and to reduce the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the lowest possible magnitude. The magnitude of the

constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} needed to ensure that the thyristor remains conductive may change as a result of a change in the conduction period T_{CON} of the phase-control voltage V_{PC} ; thus, changes of the target intensity L_{TRGT} are closely monitored such that the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} can be updated accordingly. The controllable-load current procedure 700 is also executed immediately after the startup procedure 600 exits.

[0065] Referring to FIG. 8, if the phase-control voltage V_{PC} is a reverse phase-control waveform at step 704, the controllable-load current procedure 700 simply exits. However, if the phase-control voltage V_{PC} is a forward phase-control waveform at step 704, the control circuit 140 determines whether there has been a change in the target intensity L_{TRGT} at step 706. If there is no change, then the controllable-load current procedure 700 exits. Otherwise, the control circuit 140 controls the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the maximum current I_{CL-MAX} at step 708 (to ensure that the thyristor of the dimmer switch 108 remains conductive as the target intensity L_{TRGT} changes).

[0066] Next, the control circuit 140 executes a target light level measurement procedure 400A as shown in FIG. 9 and described in greater detail below. Once the target light measurement procedure 400A is completed, the control circuit 140 considers the target intensity L_{TRGT} to be stabilized (i.e., the phase control signal V_{PC} is no longer changing in response to user adjustment at the dimmer switch 108). Then, the control circuit 140 executes a controllable-load current adjustment procedure 400B as shown in FIG. 10 and described in greater detail below. The controllable-load current adjustment procedure 400B gradually reduces the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the lowest possible magnitude before the controllable-load current procedure 700 exits.

[0067] FIG. 9 is a simplified flowchart of the target light level measurement procedure 400A. The control circuit 140 first initializes counters x, y, z to zero at step 414. Next, the control circuit 140 measures the length of the conduction period T_{CON} of the phase-control voltage V_{PC} (via the scaled phase-control voltage control signal V_{PC-S}) at step 416. At step 418, the control circuit 140 sets a previous conduction period $T_{CON-PREV}$ equal to the length of the conduction period T_{CON} determined at step 416.

[0068] The control circuit 140 then waits for a predetermined number X_{MAX} of consecutive stable half-cycles (i.e., half-cycles having the same conduction period T_{CON}), before attempting to adjust the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} . After the beginning of the next half-cycle at step 420, the control circuit 140 measures the conduction period T_{CON} of the new half-cycle at step 422. If the conduction period T_{CON} (measured at step 422) is approximately equal to the previous conduction period $T_{CON-PREV}$ at step 424 (i.e., within a predetermined tolerance), the control circuit 140 increments the counter x at step 426 to keep track of the number of consecutive half-cycles having the same conduction period T_{CON} . If the value of the counter x is not equal to the predetermined number X_{MAX} at step 428, the controllable-load current procedure 400 loops around to determine the conduction period T_{CON} of the next half-cycle at steps 420 and 422. When the conduction period T_{CON} (measured at step 422) is not equal to the previous conduction period $T_{CON-PREV}$ at step 424, the control

circuit **140** sets the value of the counter x equal to zero at step **430** and sets the previous conduction period $T_{CON-PREV}$ equal to the length of the conduction period T_{CON} (as determined at step **422**) at step **432**, before the controllable-load current procedure **400** loops around to determine the conduction period T_{CON} of the next half-cycle at steps **420** and **422**. When the value of the counter x has become equal to the predetermined number X_{MAX} at step **428**, the control circuit **140** sets at step **434** a steady-state conduction period T_{CON-SS} equal to the value of the conduction period T_{CON} (as last measured at step **424**) before exiting the target light level measurement procedure **400A**.

[0069] FIG. **10** is a simplified flowchart of the controllable-load current adjustment procedure **400B** which is executed by the control circuit **140** to begin to scale back the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} . At step **440**, the control circuit **140** decreases the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} , by controlling the controllable-load adjustment control signals $V_{CL-ADJ1}$ - $V_{CL-ADJ4}$ to appropriately render the transistors **Q240**-**Q246** conductive and non-conductive to control the constant current $I_{CL-CNST}$ to the next lowest of the fifteen possible discrete magnitudes of the constant current $I_{CL-CNST}$. After the beginning of the next half-cycle at step **442**, the control circuit **140** measures the value of the conduction period T_{CON} of the new half-cycle at step **444** and calculates a conduction-period-adjustment value ΔT_{CON} at step **446**, i.e.,

$$\Delta T_{CON} = \left| \frac{T_{CON} - T_{CON-SS}}{T_{CON-SS}} \right| \quad (\text{Equation 1})$$

If the value of the conduction-period-adjustment value ΔT_{CON} is less than or equal to a maximum conduction-period-adjustment tolerance $\Delta T_{CON-MAX}$ (e.g., approximately 3%) at step **448**, the control circuit **140** increments the counter y by one at step **450** to keep track of the number of half-cycles during which the conduction period T_{CON} is within the tolerance of the steady-state conduction period T_{CON-SS} . If the conduction-period-adjustment value ΔT_{CON} is greater than the maximum conduction-period-adjustment tolerance $\Delta T_{CON-MAX}$ at step **448**, the control circuit **140** increments the counter z by one at step **452** to keep track of the number of half-cycles during which the conduction period T_{CON} is outside of the tolerance (i.e., 3%) of the steady-state conduction period T_{CON-SS} .

[0070] After incrementing the counter y at step **450** or the counter z at step **452**, the control circuit **140** determines if the value of the counter y is greater than or equal to a maximum number Y_{MAX} of half-cycles (e.g., approximately 20) at step **454** or if the value of the counter z is greater than or equal to a maximum number Z_{MAX} of half-cycles (e.g., approximately 12) at step **456**. If the value of the counter y is less than the maximum number Y_{MAX} at step **454** and if the value of the counter z is less than the maximum number Z_{MAX} at step **456**, the controllable-load current adjustment procedure **400B** loops around to measure the conduction period T_{CON} at step **444** and calculate the conduction-period-adjustment value ΔT_{CON} once again at step **446**. If the value of the counter y is greater than or equal to the maximum number Y_{MAX} of half-cycles at step **454** and the constant current $I_{CL-CNST}$ is not equal to the minimum current I_{CL-MIN} at step **458**, the controllable-load current adjustment procedure **400B** loops

around to allow the control circuit **140** to decrease the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} , once again at step **440**. If the constant current $I_{CL-CNST}$ is equal to the minimum current I_{CL-MIN} at step **458**, the controllable-load current adjustment procedure **400B** simply exits. If the value of the counter z is greater than or equal to the maximum number Z_{MAX} of half-cycles at step **456** (i.e., the control circuit **140** has determined that the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} has been adjusted too low), the control circuit increases the constant current $I_{CL-CNST}$ back up to the next highest of the fifteen possible discrete magnitudes of the constant current $I_{CL-CNST}$ at step **460** and the controllable-load current adjustment procedure **400B** exits. Alternatively, after the control circuit increases the constant current $I_{CL-CNST}$ back up to the next highest of the fifteen possible discrete magnitudes of the constant current $I_{CL-CNST}$ at step **460**, the controllable-load current procedure **400B** could include additional verification to confirm that the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} has been increased sufficiently (e.g., in a manner similar to steps **442** through **456**).

[0071] During the controllable-load current adjustment procedure **400B**, the control circuit **140** of the LED driver **102** is further operable to maintain the light intensity of the LED light source **104** at a constant intensity while the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} is adjusted such that any user-perceivable changes in the intensity are avoided. In other words, the length of the conduction period T_{CON} of the phase-control voltage V_{PC} (via the scaled phase-control voltage control signal V_{PC-S}) may change in response to the reductions of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} , (as described above). However, the control circuit **140** is operable to disregard such changes in the conduction period T_{CON} during the controllable-load current adjustment procedure **400B** in order to maintain the light intensity of the LED light source **104** at a constant intensity.

[0072] FIG. **11** is a simplified block diagram of a load control system **500** including the dimmer switch **108** and multiple LED drivers **102A**, **102B**, **102C** for controlling the intensity of respective LED light sources **104** according to a second embodiment of the present invention. The LED drivers **102A**, **102B**, **102C** are coupled in parallel and each operate in an identical fashion as the LED driver **102** of the first embodiment so as to control the intensity of the respective LED light sources **104** in unison in response to the single phase-control voltage V_{PC} generated by the dimmer switch **108**. The LED drivers **102A**, **102B**, **102C** are each operable to controllably conduct the controllable-load current I_{CL} through the thyristor of the dimmer switch **108**, such that the magnitude of the total current conducted through the thyristor of the dimmer switch **108** is the sum of the magnitudes of the respective controllable-load currents I_{CL} , of the LED drivers. The LED drivers **102A**, **102B**, **102C** may each be operable to conduct the respective controllable-load current I_{CL} , when the phase-control voltage V_{PC} received from the dimmer switch **108** is a forward phase-control waveform, and not to conduct the controllable-load current I_{CL} when the phase-control voltage V_{PC} is a reverse phase-control waveform. In addition, the LED drivers **102A**, **102B**, **102C** are each operable to reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} independently of each other, such that the total magnitude of the total current conducted through the thyristor of the dimmer switch **108** can

be accordingly reduced per procedure 700 previously described with respect to the first embodiment.

[0073] According to a third embodiment of the present invention, the LED drivers 102A, 102B, and 102C may be operable to communicate with one another via the respective communication circuit 170 in order to reduce the total current conducted through the thyristor of the dimmer switch 108 to the lowest magnitude. For example, the LED drivers 102A, 102B, 102C may be operable to transmit and receive digital messages via a communication link (not shown), such as a wired communication link or a wireless communication link, for example, a radio-frequency (RF) communication link or an infrared (IR) communication link. Examples of a load control system having a communication link are described in greater detail in co-pending, commonly-assigned U.S. patent application Ser. No. 11/644,652, filed Dec. 22, 2006, entitled METHOD OF COMMUNICATING BETWEEN CONTROL DEVICES OF A LOAD CONTROL SYSTEM, and in U.S. Pat. No. 5,905,442, issued May 18, 1999, entitled METHOD AND APPARATUS FOR CONTROLLING AND DETERMINING THE STATUS OF ELECTRICAL DEVICES FROM REMOTE LOCATIONS, the entire disclosures of which are hereby incorporated by reference.

[0074] According to the third embodiment, each LED driver 102A, 102B, 102C is operable to independently reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} , using the target light level measurement procedure 400A (FIG. 9) and the controllable-load current adjustment procedure 400B (FIG. 10) of the first embodiment of the present invention. However, each LED driver 102A, 102B, 102C is also operable to transmit and receive simple digital messages before each LED driver begins the controllable-load current adjustment procedure 400B. Thus, each LED driver 102A, 102B, 102C can gradually reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} one at a time, such that the magnitude of the constant current is efficiently optimized for the load control system 500. According to the third embodiment of the present invention, the minimum amount of current I_{CL-MIN} may be zero amps.

[0075] For example, in response to a change to the target intensity L_{TRGT} , LED driver 102A may first gradually reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} flowing through LED driver 102A. Since LED drivers 102B, 102C may also be conducting a respective controllable-load current I_{CL} , LED driver 102A may be operable to reduce the magnitude of the constant current $I_{CL-CNST}$ of its respective controllable-load current I_{CL} to approximately zero amps. Then LED driver 102B may gradually reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} flowing through LED driver 102B to approximately zero amps since LED driver 102C may still be conducting its respective controllable-load current I_{CL} . Finally, LED driver 102C may begin to reduce the magnitude of the constant current $I_{CL-CNST}$ of its respective controllable-load current I_{CL} . However, since the LED driver 102C is the only LED driver that is still conducting the controllable-load current I_{CL} , the LED driver 102C may not be able to reduce the magnitude of the current to zero amps. Rather, the LED driver 102C would be operable to determine the minimum amount of controllable-load current I_{CL} to be conducted through the thyristor of the dimmer switch 108 in a similar manner as the LED driver 102 of the first embodiment.

[0076] If each LED driver 102A, 102B, 102C were to simultaneously begin to reduce the magnitude of its respective controllable-load current I_{CL} in response to detecting a change in the target intensity L_{TRGT} (as may occur according to the second embodiment), the magnitude of the constant current may not be fully optimized. For example, if each LED driver 102A, 102B, 102C of the second embodiment reduces the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} too much (such that the thyristor no longer remains latched), all three LED drivers 102A, 102B, 102C may then subsequently increase the magnitude of the controllable-load current whereas only a single LED driver may actually need to increase the magnitude of its controllable-load current. Thus, by ensuring that each LED driver 102A, 102B, and 102C reduces the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} one at a time (via the transmission and reception of simple digital messages) according to the third embodiment, the minimum amount of current needed to ensure that the thyristor of the dimmer switch 108 remains latched can be reached.

[0077] FIG. 12 is a simplified flowchart of a controllable-load current procedure 800 executed by each respective control circuit 140 of the LED drivers 102A, 102B, 102C according to the third embodiment of the present invention. The controllable-load current procedure 800 of the third embodiment is similar to the controllable-load current procedure 700 of the first embodiment. If the phase-control voltage V_{PC} is a reverse phase-control waveform at step 804, the controllable-load current procedure 800 simply exits. However, if the phase-control voltage V_{PC} is a forward phase-control waveform at step 804, then each respective control circuit 140 of the LED drivers 102A, 102B, 102C determines whether there is a change in the target intensity L_{TRGT} at step 806. If there is no change, then the controllable-load current procedure 800 exits. Otherwise, each respective control circuit 140 of the LED drivers 102A, 102B, 102C controls the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the maximum current I_{CL-MAX} at step 808 (to ensure that the thyristor of the dimmer switch 108 remains conductive as the target intensity L_{TRGT} changes).

[0078] Next, each respective control circuit 140 of the LED drivers 102A, 102B, 102C executes the target light level measurement procedure 400A previously described. Once the target light measurement procedure 400A is completed, the target intensity L_{TRGT} is considered by each control circuit 140 to be stabilized (i.e., the phase control signal V_{PC} is no longer changing in response to user adjustment at the dimmer switch 108). Then, each respective control circuit 140 of the LED drivers 102A, 102B, 102C checks whether a start adjustment message has been received via the communication link at step 812. The start adjustment message indicates whether one of the LED drivers 102A, 102B, 102C has begun the controllable-load current adjustment procedure 400B. Step 812 may also include a randomized wait period (i.e., a random back-off period) to prevent each respective control circuit 140 of the LED drivers 102A, 102B, 102C from simultaneously progressing to step 814 described in greater below. The random back-off period would be generated from a unique number, such as a serial number, stored in the respective memory 160 of each LED driver 102A, 102B, 102C.

[0079] If one of the control circuits, for example, the control circuit 140 of the LED driver 102A, has not received a start adjustment message from the other respective control

circuits of LED drivers 102B, 102C at step 812 (and if control circuit of the LED driver 102A has the shortest randomized wait period), then the control circuit 140 of LED driver 102A transmits the start adjustment message at step 814. Once the control circuit 140 of the LED driver 102A transmits the start adjustment message, the respective control circuits 140 of the LED drivers 102B, 102C receive the start adjustment message at step 812 shortly thereafter. The control circuits 140 of the LED drivers 102B, 102C then wait to receive a stop adjustment message at step 816. The stop adjustment message indicates that one of the LED drivers 102A, 102B, 102C has completed the controllable-load current adjustment procedure 400B.

[0080] While the respective control circuits 140 of the LED drivers 102B, 102C are waiting at step 816, the control circuit 140 of the LED driver 102A executes the controllable-load current adjustment procedure 400B to reduce the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} through the LED driver 102A to the lowest possible magnitude. Because the remaining control circuits 140 of LED drivers 102B, 102C are still controlling the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the maximum current I_{CL-MAX} (from step 808), the control circuit 140 of the LED driver 102A may be able to reduce the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} through the LED driver 102A to the minimum current I_{CL-MIN} . When the controllable-load current adjustment procedure 400B is complete, the control circuit 140 of the LED driver 102A transmits the stop adjustment message via the communication link at step 818 before the control circuit 140 exits the controllable-load current procedure 800.

[0081] When the control circuit 140 of the LED driver 102A transmits the stop adjustment message at step 818, the remaining respective control circuits 140 of the LED drivers 102B, 102C receive the stop adjustment message at step 816. Then, the remaining control circuits 140 of the LED drivers 102B, 102C check whether another start adjustment message has been received via the communication link at step 812. If a start adjustment message has not been received at step 812, one of the control circuits, for example, the control circuit 140 of LED driver 102B (having a shorter randomized wait period than the LED driver 102C), transmits the start adjustment message at step 814 before beginning the controllable-load current adjustment procedure 400B. Once the control circuit 140 of the LED driver 102C receives the start adjustment message from the LED driver 102B, the control circuit 140 of the LED driver 102C waits at step 816 to receive the stop adjustment message.

[0082] The control circuit 140 of the LED driver 102B completes the controllable-load current adjustment procedure 400B to gradually reduce the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} through the LED driver 102B to the lowest possible magnitude. Again because the remaining LED driver 102C is still controlling the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the maximum current I_{CL-MAX} (from step 808), the control circuit 140 of the LED driver 102B may be able to reduce the respective magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} (through the LED driver 102B) to the minimum current I_{CL-MIN} . After completing the controllable-load adjustment procedure 400B, the control circuit 140 of the LED driver 102B trans-

mits the stop adjustment message at step 818 before the control circuit 140 exits the controllable-load current procedure 800.

[0083] When the LED driver 102B transmits the stop adjustment message at step 818, the remaining control circuit 140 of the LED driver 102C receives the stop adjustment message at step 816. Then, the control circuit 140 of the LED driver 102C checks whether another start adjustment message has been received via the communication link at step 812. If no start adjustment message has been received at step 812, then finally, the control circuit 140 of the LED driver 102C transmits the start adjustment message at step 814 before beginning the controllable-load current adjustment procedure 400B, transmits the stop adjustment message at step 818, and exits controllable-load current procedure 800. Because the control circuit 140 of the LED driver 102C may be the only control circuit in the load control system 500 that is still controlling the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to a non-minimum current value, the control circuit may not be able to completely reduce the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} through the LED driver 102C to the minimum current I_{CL-MIN} . However, the controllable-load current adjustment procedure 400B provides that the control circuit 140 of the LED driver 102C determines the lowest possible magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} while still ensuring proper operation of the thyristor of the dimmer switch 108.

[0084] FIG. 13 is a simplified flowchart of a controllable-load current procedure 900 executed by a control circuit of the LED driver according to a fourth embodiment of the present invention. According to the fourth embodiment, the LED drivers 102A, 102B, and 102C may be operable to communicate with one another in a similar manner as described in the third embodiment. However, the LED drivers 102A, 102B, 102C of the fourth embodiment operate such that if one of the LED drivers has reduced the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the minimum value I_{CL-MIN} (i.e., zero amps), that one of the LED drivers will no longer communicate with the other LED drivers or execute the controllable-load current adjustment procedure 400B on a regular basis. For example, if the LED driver 102C becomes the only driver in the load control system 500 that is still controlling the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to a non-minimum current value, LED driver 102C becomes the only LED driver that continues to execute the controllable-load current adjustment procedure 400B during the controllable-load current procedure 900. In other words, LED drivers 102A and 102B may essentially 'drop-out' from the controllable-load current procedure 900 once they have reduced the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to the minimum value I_{CL-MIN} such that LED driver 102C becomes the only driver that continues to adjust the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} on a regular basis as further described below.

[0085] The controllable-load current procedure 900 of the fourth embodiment is very similar to the controllable-load current procedure 800 of the third embodiment. The controllable-load current procedure 900 includes the use of a minimum controllable-load current I_{CL-MIN} flag to indicate whether the LED drivers 102A, 102B, 102C are controlling the magnitude of the constant current $I_{CL-CNST}$ of the control-

lable-load current I_{CL} to the minimum value. After determining that the phase-control voltage V_{PC} is a forward phase-control waveform at step 804, each respective control circuit 140 of the LED drivers 102A, 102B, 102C will check whether the minimum controllable-load current I_{CL-MIN} flag is set at step 902. When each respective control circuit 140 of the LED drivers 102A, 102B, 102C first executes the controllable-load current procedure 900, the minimum controllable-load current I_{CL-MIN} flag is not set, thus each control circuit will execute steps 806-818 and procedures 400A, 400B in a similar manner as described above with respect to the controllable-load current procedure 800 of the third embodiment.

[0086] However, after each respective control circuit 140 of the LED drivers 102A, 102B, 102C transmits the stop adjustment message at step 818, each control circuit determines whether the magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} (as a result of the controllable load current adjustment procedure 400B) is being controlled to the minimum value I_{CL-MIN} at step 904. If the respective control circuit 140 of LED drivers 102A, 102B, 102C is controlling the controllable current to the minimum value, then the control circuit sets the minimum controllable-load current I_{CL-MIN} flag at step 906 before exiting the controllable-load current procedure 900. Otherwise, each control circuit 140 of the LED drivers 102A, 102B, 102C simply exits the controllable-load current procedure 900 without setting the minimum controllable-load current I_{CL-MIN} flag.

[0087] Thus, if the LED driver 102C becomes the only driver that is still controlling the magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} to a non-minimum current value, the respective control circuits 140 of LED drivers 102A and 102B will have set the minimum controllable-load current I_{CL-MIN} flag, whereas the control circuit of LED driver 102C will not have set the I_{CL-MIN} flag. As a result, the next time that the controllable-load current procedure 900 is executed by the control circuits 140 of the LED drivers 102A, 102B, 102C, the control circuits of LED drivers 102A and 102B will determine that the minimum controllable-load current I_{CL-MIN} flag is set at step 902, and will immediately exit the procedure 900 (i.e., "dropping out"). Further, since the control circuit 140 of the LED driver 102C has not set the minimum controllable-load current I_{CL-MIN} flag, LED driver 102C will continue to control the controllable load current according to steps 806-818, 904-906, and procedures 400A, B of the controllable-load current procedure 900.

[0088] Alternatively, the LED drivers 102A, 102B, 102C may not reduce the magnitude of the constant current $I_{CL-CNST}$ in an incremental fashion (i.e., to one of the plurality of magnitudes between the maximum current I_{CL-MAX} and approximately zero amps). The LED drivers 102A, 102B, 102C may be operable to simply decrease (i.e., step) the magnitude of the constant current $I_{CL-CNST}$ from the initial magnitude (i.e., the maximum current I_{CL-MAX}) to approximately zero amps. The LED drivers 102A, 102B, 102C would each be operable to subsequently monitor the length of the conduction period T_{CON} to determine if there have been any changes in the length of the conduction period T_{CON} , and to increase the magnitude of the constant current $I_{CL-CNST}$ back to the maximum current I_{CL-MAX} if the length of the conduction period T_{CON} has changed. Accordingly, when operating together as part of the lighting control system, the LED drivers 102A, 102B, 102C would one-by-one decrease the magnitude of the constant current $I_{CL-CNST}$ to approximately zero

amps (i.e., disable the respective controllable-load circuits 180) until the last LED driver determines that the magnitude of the constant current $I_{CL-CNST}$ must remain at the maximum current I_{CL-MAX} in order to conduct enough current through the thyristor of the dimmer switch 108 to exceed the rated latching and holding currents of the thyristor.

[0089] According to a fifth embodiment of the present invention, the LED drivers 102A, 102B, 102C may be operable to determine a total number N_{TOTAL} of LED drivers in the load control system 500 by transmitting and receiving digital messages via a discovery process that is executed, for example, upon power-up. Then, each LED driver 102A, 102B, 102C can determine the appropriate magnitude of the constant current $I_{CL-CNST}$ of the controllable-load current I_{CL} that each of the LED drivers should conduct, such that the magnitude of the total current conducted through the thyristor of the dimmer switch 108 will exceed the rated latching and holding currents of the thyristor. For example, each of the LED drivers 102A, 102B, 102C may control the magnitude of the respective constant current $I_{CL-CNST}$ as a function of the maximum current I_{CL-MAX} and the total number N_{TOTAL} of LED drivers in the load control system 500, e.g.,

$$I_{CL-CNST} = I_{CL-MAX} / N_{TOTAL} \quad (\text{Equation 2})$$

Accordingly, the magnitude of the total current conducted through the thyristor of the dimmer switch 108 is reduced to a low magnitude, and power is not needlessly dissipated in each of the LED drivers 102A, 102B, 102C.

[0090] FIG. 14 is a simplified flowchart of a startup procedure 1000, and FIG. 15 is a simplified flowchart of an LED driver discovery procedure 1100 executed by a control circuit 140 of the LED driver 102A, 102B, 102C according to the fifth embodiment. The startup procedure 1000 is very similar to the startup procedure 600 of the first embodiment. However, once each respective control circuit 140 has determined that the phase-control voltage V_{PC} is a forward phase-control waveform at step 606, then each control circuit executes the LED driver discovery procedure 1100 to determine the total number N_{TOTAL} of LED drivers in the load control system 500.

[0091] At step 1102 of the LED driver discovery procedure 1100 as shown in FIG. 15, each respective control circuit 140 initializes the total number N_{TOTAL} of LED drivers to one (i.e., each LED driver counts itself) and a query counter Q to zero. The query counter Q is used to count the number of query attempts, and at step 1104, each respective control circuit 140 determines whether the query counter Q is less than a maximum number of queries Q_{MAX} (e.g., 5). If the query counter Q is less than the maximum number of queries Q_{MAX} , then the control circuit 140 transmits a query message (i.e., a "who's there?" message) via the communication link to determine whether there are other LED drivers in the load control system 500. After transmitting the query message, each respective control circuit 140 increments the query counter at step 1108, and checks to see whether a response to the query message has been received at step 1110. The query message response will include a unique identifier of each LED driver 102A, 102B, 102C such as a serial number stored in each respective memory 160. If a query message response has been received at step 1110, then the control circuit 140 confirms whether the query message response contains a new serial number at step 1112. If the serial number is new at step 1112, then the control circuit 140 will increment the total number N_{TOTAL} of LED drivers at step 1114 before looping back to

step 1104 to check the query counter again. If the serial number is not new at step 1112, then the control circuit simply loops back to step 1104. In other words, each LED driver 102A, 102B, 102C checks the serial number of the query message response to ensure that the same LED driver is not counted more than once when determining the total number N_{TOTAL} of LED drivers.

[0092] If the control circuit 140 does not receive a query message response at step 1110, then the control circuit determines whether it has received a query message from another control circuit at step 1116. If the control circuit 140 has received a query message, then the control circuit sends a query message response (including its respective serial number or unique identifier) at step 1118 before looping back to step 1104 to check the query counter again. Otherwise, the control circuit simply loops back to step 1104. Once the query counter Q is no longer less than the maximum number of queries Q_{MAX} , at step 1104, each respective control circuit 140 calculates the respective constant current $I_{CL-CNST}$ as a function of the maximum current I_{CL-MAX} and the total number N_{TOTAL} of LED drivers in the load control system 500 at step 1120 before exiting procedure 1100. Thus, the fifth embodiment does not require each respective control circuit 140 of the LED drivers 102A, 102B, 102C to regularly execute a controllable-load current procedure as discussed in the previous embodiments.

[0093] According to an alternate embodiment, the LED drivers 102A, 102B, 102C may be operable to communicate with a master control device via their respective communication circuits 170. The master control device may be operable to send digital messages to each LED driver 102A, 102B, 102C to instruct the LED drivers as to the appropriate magnitude of the constant current $I_{CL-CNST}$ of the respective controllable-load current I_{CL} that each LED driver should conduct. The master control device may be implemented as a smart dimmer switch, a handheld programming device (for example, a personal digital assistant or a smart cellular telephone), a central controller (for example, a main repeater device for a wireless load control system), or any type of suitable master control device. Alternatively, one of the LED drivers 102A, 102B, 102C may be operable to act as the master control device through an arbitration process as is well known in the art. An example of such an arbitration process is described in greater detail in co-pending, commonly-assigned U.S. patent application Ser. No. 11/672,884, filed Feb. 8, 2007, entitled COMMUNICATION PROTOCOL FOR A LIGHTING CONTROL SYSTEM, the entire disclosure of which is hereby incorporated by reference.

[0094] While the present invention has been described with reference to the LED drivers 102, 102A, 102B, 102C for controlling the intensity of respective LED light sources 104, the controllable-load circuit 180 disclosed herein could be used in other load control devices, such as electronic dimming ballasts for controlling fluorescent lamps, or motor control devices for controlling motor loads. In addition, the controllable-load circuit 180 need not be implemented as part of the load control device (i.e., as part of the LED driver 102), but could be included in a separate enclosure and simply electrically coupled to the dimmer switch 108 of the load control system 100. Further, the controllable-load circuit 180 could alternatively be implemented as a digital potentiometer or a suitable equivalent.

[0095] In addition, while the phase control determination procedure 300 disclosed herein is performed by the LED

drivers 102, 102A, 102B, 102C in order to appropriately control the controllable-load circuit 180, the phase control determination procedure could alternatively be performed to provide other capabilities. For example, the phase control determination procedure could be used to properly control the LED drive circuit with an appropriate dimming range in response to determining whether the phase control signal is a forward or reverse phase control waveform. For example, once an LED driver has determined that the phase-control voltage V_{PC} is a forward phase-control waveform, the LED driver can operate in a forward phase control mode and use a forward phase control dimming range when controlling the LED drive circuit.

[0096] Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

What is claimed is:

1. A load control device for controlling the amount of power delivered from an AC power source to an electrical load, the load control device adapted to be coupled to the AC power source through a dimmer switch, the load control device comprising:

- a load control circuit adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load;
- a controller coupled to the load control circuit for controlling the amount of power delivered to the electrical load in response to a conduction time of a phase-control voltage received from the dimmer switch; and
- a controllable-load circuit coupled to the controller, the controllable-load circuit operable to conduct a controllable-load current from the AC power source through the dimmer switch, the controllable-load current having a constant magnitude for at least a portion of each half-cycle of the AC power source;

wherein the controller is operable to monitor the conduction time of the phase-control voltage and to cause the controllable-load circuit to decrease the constant magnitude of the controllable-load current from an initial magnitude to a decreased magnitude, such that the conduction time of the phase-control voltage when the controllable-load current has the decreased magnitude is the same as when the controllable-load current has the initial magnitude.

2. The load control device of claim 1, wherein the decreased magnitude is less than the initial magnitude and greater than approximately zero amps.

3. The load control device of claim 2, wherein the controller is operable to monitor the conduction time of the phase-control voltage after the constant magnitude of the controllable-load current has been decreased to the decreased magnitude and to further decrease the constant magnitude of the controllable-load current by an increment if the conduction time of the phase-control voltage has not changed.

4. The load control device of claim 3, wherein the controller is operable to increase the constant magnitude of the controllable-load current by the increment if the conduction time of the phase-control voltage has changed.

5. The load control device of claim 1, wherein the decreased magnitude is approximately zero amps.

6. The load control device of claim 5, wherein the controller is operable to monitor the conduction time of the phase-control voltage after the constant magnitude of the controllable-load current has been decreased to approximately zero amps and to increase the constant magnitude of the controllable-load current back to the initial magnitude if the conduction time of the phase-control voltage has changed.

7. The load control device of claim 1, further comprising a communications circuit coupled to the controller.

8. The load control device of claim 7, wherein the controller is further operable to determine a total number of load control devices coupled to the dimmer switch and receiving the phase-control voltage.

9. The load control device of claim 8, wherein the controller is further operable to transmit a query message and to receive a query response message via the communications circuit to determine the total number of load control devices coupled to the dimmer switch.

10. The load control device of claim 9, wherein the decreased magnitude of the controllable-load current is equal to a maximum magnitude divided by the total number of load control devices coupled to the dimmer switch.

11. The load control device of claim 7, wherein the controller is operable to transmit a first digital message before decreasing the constant magnitude of the controllable-load current and to transmit a second digital message after decreasing the constant magnitude of the controllable-load current.

12. The load control device of claim 1, wherein when the controller causes the controllable-load circuit to decrease the constant magnitude of the controllable-load current from the initial magnitude to the decreased magnitude, the controller is further operable to control the load control circuit to deliver a substantially constant amount of power to the electrical load.

13. A load control system for controlling the amount of power delivered from an AC power source to an electrical load, the load control system comprising:

a load control device adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load; and

a dimmer switch comprising a thyristor coupled in series electrical connection between the AC power source and the load control device, the thyristor characterized by a rated holding current and operable to conduct a load current from the AC power source to the load control device, the dimmer switch operable to generate a phase-control voltage that is provided to the load control device, such that the load control device is operable to adjust the amount of power being delivered to the electrical load in response to a conduction time of the phase-control voltage;

wherein the load control device is operable to conduct a controllable-load current from the AC power source through the thyristor of the dimmer switch, the controllable-load current having a constant magnitude for at least a portion of each half-cycle of the AC power source, the load control device operable to decrease the constant magnitude of the controllable-load current from an initial magnitude to a decreased magnitude, such that the decreased magnitude of the load current conducted through the thyristor exceeds the rated holding current.

14. A load control system for controlling the amount of power delivered from an AC power source to first and second electrical loads, the load control system comprising:

a first load control device adapted to be coupled to the first electrical load for controlling the amount of power delivered to the first electrical load;

a second load control device adapted to be coupled to the second electrical load for controlling the amount of power delivered to the second electrical load; and

a dimmer switch comprising a thyristor coupled in series electrical connection between the AC power source and the first and second load control devices, the thyristor characterized by a rated holding current and operable to conduct a load current from the AC power source to the first and second load control devices, the dimmer switch operable to generate a phase-control voltage that is provided to the first and second load control device, such that the first and second load control devices are operable to adjust the amount of power being delivered to the respective electrical loads in response to a conduction time of the phase-control voltage;

wherein the load control devices are operable to conduct respective controllable-load currents from the AC power source through the thyristor of the dimmer switch, each controllable-load current having a constant magnitude for at least a portion of each half-cycle of the AC power source, the load control devices each operable to adjust the constant magnitude of the respective controllable-load current from an initial magnitude to a decreased magnitude, such that a total magnitude of the respective controllable-load currents exceeds the rated holding current when the controllable-load currents have the respective decreased magnitudes.

15. The load control system of claim 14, wherein the first load control device is operable to adjust the constant magnitude of its respective controllable-load current from the initial magnitude to a minimum magnitude; and

the second load control device is operable to adjust the constant magnitude of its respective controllable-load current from an initial magnitude to a first magnitude greater than the minimum magnitude, such that the total magnitude of the respective controllable-load currents exceeds the rated holding current of the thyristor.

16. The load control system of claim 15, wherein the minimum magnitude is approximately zero amps.

17. The load control system of claim 14, wherein the first and second load control devices are coupled to a communication link.

18. The load control system of claim 17, wherein the first and second load control devices are operable to determine a total number of load control devices in the load control system.

19. The load control system of claim 18, wherein the decreased magnitude of the respective controllable-load current is equal to a maximum magnitude divided by the total number of load control devices.

20. The load control system of claim 19, wherein the initial magnitude of the respective controllable-load current is equal to the maximum magnitude.

21. The load control system of claim 17, wherein the first control device is operable to transmit a first digital message before adjusting the constant magnitude of its respective controllable-load current from the initial magnitude to the decreased magnitude and a second digital message after adjusting the constant magnitude of its respective controllable-load current from the initial magnitude to the decreased magnitude.

22. The load control system of claim **21**, wherein the second control device is operable to adjust the constant magnitude of its respective controllable-load current from the initial magnitude to the decreased magnitude in response to receiving the second digital message from the first control device.

23. A controllable-load circuit for drawing a selected current from a power source comprising:

- a first semiconductor switch having a control input coupled to the power source;
- a first impedance forming circuit connected in series with the first semiconductor switch across the power source, the first impedance forming circuit including a first input for selecting between at least two impedances to be connected in series with the first semiconductor switch;
- a control circuit having an output coupled to said first input for selecting the selected impedance; and
- a second circuit coupled to said first semiconductor switch for monitoring the power source and for increasing the impedance to current flowing from said power source through said first semiconductor switch at a selected voltage level of said power source, thereby to reduce the current through said first semiconductor switch;

wherein said control circuit controls the impedance of said impedance forming circuit to automatically control the current through said first semiconductor switch to be at a predefined level.

24. The controllable-load circuit of claim **23**, wherein the power source comprises an alternating current source.

25. The controllable-load circuit of claim **24**, wherein the power source comprises a source of rectified alternating current.

26. The controllable-load circuit of claim **25**, wherein the rectified alternating current has a phase control component.

27. The controllable-load circuit of claim **26**, wherein the phase control component comprises one of a forward phase control or a reverse phase control.

28. The controllable-load circuit of claim **27**, wherein said control circuit is operable to determine whether said rectified alternating current comprises a forward phase control component or a reverse phase control component.

29. The controllable-load circuit of claim **28**, wherein said control circuit is operable to render the first semiconductor switch conductive when there is a forward phase control component and to render the first semiconductor switch non-conductive when there is a reverse phase control component.

30. The controllable-load circuit of claim **29**, wherein said control circuit is operable to sample the voltage of the power source and increment a first counter each time the voltage of the power source exceeds a noise level threshold to keep track of a number of samples.

31. The controllable-load circuit of claim **30**, wherein, if the voltage of the power source exceeds the noise level, the control circuit increments a second counter each time the voltage of the power source exceeds a predefined voltage level and checks to determine if the number of samples equals a predefined number of samples.

32. The controllable-load circuit of claim **31**, wherein the control circuit increments a third counter each time the number of samples equals the predefined number of samples to keep track of the number of half cycles of said rectified alternating current and checks said second counter to determine if said second counter equals or exceeds a predefined count value of said second counter.

33. The controllable-load circuit of claim **32**, wherein, if the count of said second counter does not equal or exceed said second counter predefined count value, the third counter is checked to determine if the third counter count equals a predefined third counter count and if not resets said first counter and further wherein if said second counter count equals or exceeds said second counter predefined count value, a fourth counter is incremented, said third counter count is checked to determine if it equals said predefined third counter count value and, if not said first counter is reset and if it equals said predefined third counter count value, checks the fourth counter count value to determine if it equals or exceeds a predefined fourth counter count value, and if so, said control circuit determines that the phase control component is a forward phase control component and enables said controllable-load circuit and if not, determines that said phase control component is a reverse phase control component and disables said controllable-load circuit.

34. The controllable-load circuit of claim **28**, wherein the control circuit monitors said power source to determine if a voltage of said power source is above a predefined voltage level for a predefined time to determine if said power source includes a forward phase component or a reverse phase component.

35. The controllable-load circuit of claim **26**, wherein the control circuit controls the impedance of said first impedance forming circuit to set the current through said first semiconductor switch at the predefined level by determining if a conduction period of the phase control component is within a predefined value.

36. The controllable-load circuit of claim **35**, wherein said control circuit determines a steady state value of the conduction period by determining if the conduction period remains substantially constant for a predetermined number of half cycles of said rectified alternating current, and if so, sets the determined conduction period as the steady state conduction period.

37. The controllable-load circuit of claim **36**, wherein to automatically control the current through the first semiconductor switch to the predefined level, the control circuit implements the steps of:

- a) decreasing the current through the first semiconductor switch by controlling the first impedance forming circuit to incrementally increase the impedance of said impedance forming circuit;
- b) determining the present conduction period in the next half cycle of said rectified alternating current;
- c) determining a conduction period adjustment value as a function of said steady state conduction period and the present conduction period;
- d) determining if the conduction period adjustment value is less than or equal to a predefined conduction period adjustment value threshold;
- e) incrementing a within tolerance counter if the conduction period adjustment value is less than the predefined conduction period adjustment value threshold and incrementing an outside tolerance counter if the conduction period adjustment value is greater than the predefined conduction period adjustment value threshold;
- f) determining if the within tolerance counter equals or exceeds a within tolerance maximum value and if so checking to determine if the current through the first semiconductor switch equals a predefined minimum value and if not, decreasing the current through the first

semiconductor switch by controlling the first impedance forming circuit to incrementally increase the impedance of said impedance forming circuit and repeating steps b-f; and

- g) if the within tolerance counter is less than the within tolerance maximum value, determining if the outside tolerance counter equals or exceeds a maximum value for the outside tolerance counter and if not, repeating steps b-f, and if equal to the maximum value, controlling the first impedance forming circuit to incrementally decrease the impedance of said impedance forming circuit to incrementally increase the current through said first semiconductor switch.

38. The controllable-load circuit of claim **37**, wherein the conduction period adjustment value comprises a value expressed as the absolute value of the difference between the determined present conduction period and the steady state conduction period as a percentage of the steady state conduction period.

39. The controllable-load circuit of claim **26**, wherein the phase control component is generated by a phase control circuit including a thyristor series connected with the first semiconductor switch, and wherein the predefined level of the current through the first semiconductor switch minimally exceeds both a latching current and a holding current of said thyristor.

40. The controllable-load circuit of claim **23**, wherein the second circuit comprises a first transistor coupled to the control input of said first semiconductor switch and a second transistor in series with the first transistor, the second transistor having a control input coupled to receive a voltage from said power source and to turn on at the selected voltage level to thereby cause current to be diverted away from the control input of said first semiconductor switch to cause said first semiconductor switch to enable a linear region of operation.

41. The controllable-load circuit of claim **23**, wherein the power source comprises the output of a load control device including a series thyristor having a latching current and holding current, and said control circuit automatically adjusting said impedance of said impedance forming circuit to a value that insures said predefined level of the current through the first semiconductor switch is minimally adequate to maintain the latching current and holding current through said thyristor.

42. The controllable-load circuit of claim **23**, wherein the first impedance forming circuit comprises a plurality of parallel connected series circuits each comprising a resistance and a controlled semiconductor switch, each controlled semiconductor switch having an input for selection by said control circuit, whereby one or more impedances can be disposed in series with said first semiconductor switch to generate a plurality of incrementally different current values through said first semiconductor switch.

43. The controllable-load circuit of claim **23**, wherein the controllable-load circuit is coupled across the power source providing power to a driver circuit driving an LED light source.

44. A load control device for controlling the amount of power delivered from an AC power source to an electrical load, the load control device adapted to be coupled to the AC power source through a dimmer switch, the load control device comprising:

a load control circuit adapted to be coupled to the electrical load for controlling the amount of power delivered to the electrical load; and

a controller coupled to the load control circuit for controlling the amount of power delivered to the electrical load in response to a phase-control voltage received from the dimmer switch;

wherein the controller is operable to determine whether the phase-control voltage comprises a forward phase-control waveform or a reverse phase-control waveform, the controller operable to operate in a first mode when the phase-control voltage is a forward phase-control waveform, and to operate in a second mode when the phase-control voltage is a reverse phase-control waveform.

45. The load control device of claim **44**, wherein the controller monitors a magnitude of the phase-control voltage received from the dimmer switch to determine whether the phase-control voltage is a forward phase-control waveform or a reverse phase-control waveform.

46. The load control device of claim **45**, wherein the control circuit compares the magnitude of the phase-control voltage to a voltage threshold after detecting a voltage transition of the phase-control voltage to determine whether the phase-control voltage is a forward phase-control waveform or a reverse phase-control waveform, the controller determining that the phase-control voltage is a forward phase-control waveform if the magnitude of the phase-control voltage is consistently larger than the voltage threshold.

47. The load control device of claim **44**, further comprising:

a controllable-load circuit coupled to the controller, the controllable-load circuit operable to conduct a controllable-load current from the AC power source through the dimmer switch;

wherein the controller is operable to enable the controllable-load circuit, such that the controllable-load circuit conducts the controllable-load current through the dimmer switch when the controller is operating in the first mode, the controller further operable to disable the controllable-load circuit, such that the controllable-load circuit does not conduct the controllable-load current through the dimmer switch when the controller is operating in the second mode.

48. The load control device of claim **47**, wherein a magnitude of the controllable-load current conducted by the controllable-load circuit through the dimmer switch exceeds at least one of a rated latching current or a rated holding current of the dimmer switch.

49. An LED driver for controlling the amount of power delivered from an AC power source to an LED light source, the LED driver adapted to be coupled to the AC power source through a dimmer switch, the LED driver comprising:

a bus capacitor for storing a DC bus voltage;

an LED drive circuit coupled to the bus capacitor for receiving the DC bus voltage and adapted to be coupled to the LED light source for controlling the amount of power delivered to the LED light source;

a controller coupled to the LED drive circuit for controlling the amount of power delivered to the LED light source to control the intensity of the LED light source in response to a phase-control voltage received from the dimmer switch; and

a controllable-load circuit coupled to the controller, the controllable-load circuit operable to conduct a controllable-load current from the AC power source through the dimmer switch;

wherein the controller is operable to determine whether the phase-control voltage comprises a forward phase-control waveform or a reverse phase-control waveform, the controller operable to enable the controllable-load circuit, such that the controllable-load circuit conducts the controllable-load current through the dimmer switch when the phase-control voltage is a forward phase-control waveform, the controller further operable to disable the controllable-load circuit, such that the controllable-load circuit does not conduct the controllable-load current through the dimmer switch when the phase-control voltage is a reverse phase-control waveform.

50. The LED driver of claim **49**, wherein the controller is further operable to decrease a constant magnitude of the controllable-load current from an initial magnitude to a decreased magnitude when the controllable-load circuit is enabled.

51. The LED driver of claim **50**, wherein the decreased magnitude of the controllable-load current conducted by the

controllable-load circuit through the dimmer switch exceeds at least one of a rated latching current or a rated holding current of the dimmer switch.

52. The LED driver of claim **51**, wherein the controller is operable to monitor a conduction time of the phase-control voltage after the constant magnitude of the controllable-load current has been decreased to the decreased magnitude and to further decrease the constant magnitude of the controllable-load current by an increment if the conduction time of the phase-control voltage has not changed.

53. The LED driver of claim **52**, wherein the controller is operable to increase the constant magnitude of the controllable-load current by the increment if the conduction time of the phase-control voltage has changed.

54. The LED driver of claim **50**, wherein when the controller decreases the constant magnitude of the controllable-load current from the initial magnitude to the decreased magnitude, the controller is further operable to control the LED drive circuit to deliver a substantially constant amount of power to the LED light source.

* * * * *