



US010524202B2

(12) **United States Patent**
Tsividis

(10) **Patent No.:** **US 10,524,202 B2**

(45) **Date of Patent:** ***Dec. 31, 2019**

(54) **POWER DISSIPATION REDUCTION IN WIRELESS TRANSCEIVERS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Theta IP, LLC**, Coppell, TX (US)

3,408,587 A 10/1968 Lancaster

(72) Inventor: **Yannis Tsividis**, New York, NY (US)

4,270,222 A 5/1981 Menant

(Continued)

(73) Assignee: **THETA IP, LLC**, Coppell, TX (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

DE 10026152 2/2001
EP 0795967 9/1997

(Continued)

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

(21) Appl. No.: **15/824,841**

US 6,529,069 B2, 03/2003, Krishnapura et al. (withdrawn)

(22) Filed: **Nov. 28, 2017**

(Continued)

(65) **Prior Publication Data**

US 2018/0084492 A1 Mar. 22, 2018

Primary Examiner — Quochien B Vuong

(74) *Attorney, Agent, or Firm* — Jennifer Hayes; Nixon Peabody LLP

Related U.S. Application Data

(63) Continuation of application No. 15/080,421, filed on Mar. 24, 2016, now Pat. No. 9,838,962, which is a (Continued)

(57) **ABSTRACT**


Methods and circuits for reducing power dissipation in wireless transceivers and other electronic circuits and systems. Embodiments of the present invention use bias current reduction, impedance scaling, and gain changes either separately or in combination to reduce power dissipation. For example, bias currents are reduced in response to a need for reduced signal handling capability, impedances are scaled thus reducing required drive and other bias currents in response to a strong received signal, or gain is increased and impedances are scaled in response to a low received signal in the presence of no or weak interfering signals.

(51) **Int. Cl.**
H04B 1/38 (2015.01)
H04M 1/00 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04W 52/0209** (2013.01); **H04B 1/109** (2013.01); **Y02D 70/00** (2018.01); **Y02D 70/142** (2018.01); **Y02D 70/40** (2018.01)

(58) **Field of Classification Search**
CPC H04B 1/16; H04B 1/1607; H04B 1/40; H04B 17/318; H04W 52/52; H03F 1/56;
(Continued)

23 Claims, 15 Drawing Sheets

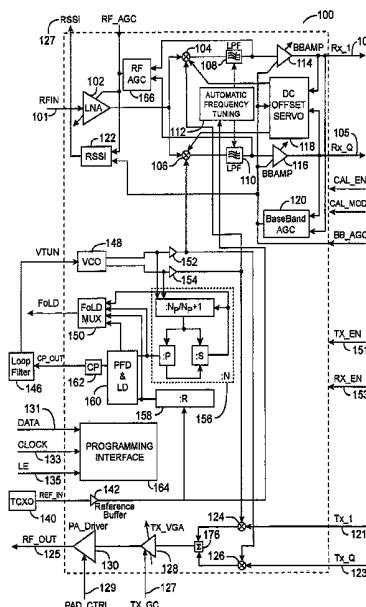

Related U.S. Application Data

continuation of application No. 11/318,646, filed on Dec. 27, 2005, now Pat. No. 9,331,728, which is a continuation of application No. 10/784,613, filed on Feb. 23, 2004, now Pat. No. 7,010,330.

- (60) Provisional application No. 60/451,229, filed on Mar. 1, 2003, provisional application No. 60/451,230, filed on Mar. 1, 2003.

(51) **Int. Cl.**

H04W 52/02 (2009.01)

H04B 1/10 (2006.01)

(58) **Field of Classification Search**

CPC H03F 3/20; H03F 2200/27; H03F 2200/78; H03F 2200/387; H03F 2200/451

USPC 455/63.1, 67.13, 127.1, 127.2, 127.5, 455/226.1, 226.2, 232.1, 234.1, 250.1, 455/251.1, 295, 296, 311, 343.1, 572, 455/574; 370/442; 330/127, 134, 144

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,355,414 A 10/1982 Inoue
4,894,566 A 1/1990 Rush
5,001,776 A 3/1991 Clark
5,020,147 A 5/1991 Okanobu
5,179,724 A 1/1993 Lindoff
5,390,357 A 2/1995 Nobusawa et al.
5,392,457 A 2/1995 Davis et al.
5,406,613 A 4/1995 Peponides et al.
5,406,635 A * 4/1995 Jarvinen G10L 21/0208
381/94.3
5,408,697 A 4/1995 Price et al.
5,412,498 A 5/1995 Arstein et al.
5,564,094 A 10/1996 Anderson et al.
5,600,271 A 2/1997 Erickson et al.
5,638,141 A 6/1997 Bae et al.
5,661,437 A 8/1997 Nishikawa et al.
5,751,148 A 5/1998 Kennedy et al.
5,809,400 A 9/1998 Abramsky et al.
5,854,973 A * 12/1998 Holtvoeth H03G 1/0088
455/250.1
5,864,760 A 1/1999 Gilhousen et al.
5,867,063 A 2/1999 Snider et al.
5,886,547 A 3/1999 Durec et al.
5,907,798 A 5/1999 Abramsky et al.
5,930,692 A 7/1999 Peterzell et al.
5,949,286 A 9/1999 Jones
5,995,853 A 11/1999 Park
6,026,288 A 2/2000 Bronner
6,081,558 A 6/2000 North
6,100,761 A 8/2000 Ezell
6,134,430 A 10/2000 Younis et al.
6,157,668 A 12/2000 Gilhousen et al.
6,175,279 B1 1/2001 Ciccarelli et al.
6,259,901 B1 7/2001 Shinomiya et al.
6,259,928 B1 7/2001 Vembu
6,298,221 B1 10/2001 Nguyen
6,311,048 B1 * 10/2001 Loke H04B 1/109
455/245.1
6,339,711 B1 1/2002 Otake et al.
6,351,172 B1 2/2002 Ouyang et al.
6,360,085 B1 3/2002 Walley
6,370,187 B1 4/2002 Agah
6,370,210 B1 4/2002 Yamamoto
6,388,525 B1 5/2002 Bien
6,389,445 B1 5/2002 Tsvividis
6,400,177 B1 6/2002 Yoshizaki
6,498,926 B1 12/2002 Ciccarelli et al.
6,509,796 B2 1/2003 Nguyen et al.

6,546,058 B1 4/2003 Gilhousen et al.
6,577,677 B1 6/2003 Hara
6,621,339 B2 9/2003 Tripathi et al.
6,633,550 B1 10/2003 Gardenfors et al.
6,639,447 B2 10/2003 Manku et al.
6,657,498 B2 12/2003 Park et al.
6,668,028 B1 12/2003 Wieck
6,670,901 B2 12/2003 Brueske et al.
6,683,492 B2 1/2004 Krishnapura et al.
6,687,491 B2 2/2004 Wieck
6,690,922 B1 * 2/2004 Lindemann H03G 3/3047
455/67.11
6,694,129 B2 2/2004 Peterzell et al.
6,697,611 B1 2/2004 Franca-Neto
6,710,651 B2 3/2004 Forrester
6,714,557 B1 3/2004 Smith et al.
6,724,251 B1 4/2004 Ziazadeh et al.
6,735,424 B1 5/2004 Larson et al.
6,784,738 B1 8/2004 Jin et al.
6,801,760 B2 10/2004 Hutchison et al.
6,807,406 B1 10/2004 Razavi et al.
6,819,938 B2 11/2004 Sahota
6,819,939 B2 11/2004 Masamura
6,826,418 B2 11/2004 Adachi et al.
6,870,425 B2 3/2005 Leifso et al.
6,933,779 B2 8/2005 Lee et al.
6,944,427 B2 9/2005 Haub et al.
6,963,755 B2 11/2005 Chen et al.
6,965,655 B1 11/2005 Mostov et al.
6,993,297 B2 1/2006 Smith, Jr.
7,016,654 B1 3/2006 Bugeja
7,054,605 B1 5/2006 Groe
7,079,825 B2 7/2006 Wieck
7,095,994 B1 8/2006 Aytur et al.
7,130,602 B2 10/2006 Ciccarelli
7,149,246 B1 12/2006 Adams et al.
7,190,935 B2 * 3/2007 Hecht H03F 1/0272
455/234.1
7,248,653 B2 7/2007 Wieck
7,274,760 B2 9/2007 Palaskas et al.
7,283,851 B2 10/2007 Persico et al.
7,299,021 B2 11/2007 Parssinen et al.
7,395,087 B2 7/2008 Watanabe
7,592,873 B2 9/2009 Satoh et al.
7,656,933 B2 * 2/2010 Klinke G10L 21/02
455/63.1
RE41,582 E 8/2010 Larson et al.
7,778,351 B2 8/2010 Hsu et al.
9,350,313 B2 * 5/2016 Wilhelmsson H03G 3/3078
2002/0036519 A1 3/2002 Krishnapura et al.
2002/0050861 A1 5/2002 Nguyen et al.
2002/0137478 A1 9/2002 Masamura
2002/0190796 A1 12/2002 Park et al.
2003/0002452 A1 1/2003 Sahota
2003/0025623 A1 2/2003 Brueske et al.
2003/0076168 A1 4/2003 Forrester
2003/0086383 A1 5/2003 Bremer et al.
2003/0100279 A1 5/2003 Medvid et al.
2003/0112059 A1 6/2003 Krishnapura et al.
2003/0112060 A1 6/2003 Krishnapura et al.
2003/0117212 A1 6/2003 Krishnapura et al.
2003/0124999 A1 7/2003 Parssinen et al.
2003/0169089 A1 9/2003 Manku et al.
2004/0042572 A1 3/2004 Palaskas et al.
2004/0077324 A1 4/2004 Wieck
2004/0091035 A1 5/2004 Palaskas et al.
2004/0152429 A1 8/2004 Haub et al.

FOREIGN PATENT DOCUMENTS

GB 2362523 11/2001
WO WO-02/35756 5/2002
WO WO-02/056470 7/2002

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	WO-02/056558	7/2002
WO	WO-2004/017589	2/2004

OTHER PUBLICATIONS

"Office Action dated Apr. 13, 2018; U.S. Appl. No. 15/080,432", dated Apr. 13, 2018.

"Office Action dated Nov. 1, 2016; U.S. Appl. No. 15/080,432", dated Nov. 1, 2016.

"Office Action dated Sep. 6, 2017; U.S. Appl. No. 15/080,432", dated Sep. 6, 2017.

Aparin, Vladimir et al., "A Highly-Integrated Tri-Band/Quad-Mode SiGe BiCMOS RF-to-Baseband Receiver for Wireless CDMA/VVCDMA/AMPS Applications with GPS Capability", 2002 IEEE International Solid-State Circuits Conference, Session 14, Cellular RF Wireless, 14.3, 2002.

Behbahani, Farbod et al., "A Broad-Band Tunable CMOS Channel-Select Filter for a Low-IF Wireless Receiver", IEEE Journal of Solid-State Circuits, vol. 35, No. 4, Apr. 2000, pp. 476-489.

Behbahani, Farbod et al., "Adaptive Analog IF Signal Processor for a Wide-Band CMOS Wireless Receiver", IEEE Journal of Solid-State Circuits, vol. 36, No. 8, Aug. 2001, pp. 1205-1217.

Behbahani, Farbod, "An Adaptive Scalable 2.4 GHz Frequency Hopping Receiver for Wideband Wireless LAN", A dissertation submitted in partial satisfaction of the requirements for the degree of Doctor of Philosophy in Electrical Engineering, University of California, Los Angeles, 1999.

Behzad, Arya R. et al., "A 5-GHz Direct-Conversion CMOS Transceiver Utilizing Automatic Frequency Control for the IEEE 802.11a Wireless LAN Standard", IEEE Journal of Solid-State Circuits, vol. 38, No. 12, Dec. 2003, pp. 2209-2220.

Christensen, Craig L., "A Low Power, Low Data Rate Integrated 433MHz Wireless Transceiver in CMOS", Proceedings of the 15th Biennial University/Government/Industry Microelectronics Symposium, 2003, pp. 70-73.

Dasgupta, Uday et al., "A CMOS Transmit/Receive IF Chip-Set for WCDMA Mobiles", 2002 IEEE Radio Frequency Integrated Circuits Symposium, MO4A-4, 2002, pp. 195-198.

Gray, P. R. et al., "Future Directions in Silicon ICs for RF Personal Communications", IEEE 1995 Custom Integrated Circuits Conference, 1995, pp. 83-90.

Hollman, Thomas et al., "A 2.7-V CMOS Dual-Mode Baseband Filter for PDC and WCDMA", IEEE Journal of Solid-State Circuits, vol. 36, No. 7, Jul. 2001, pp. 1148-1153.

Lee, Kang-Yoon et al., "Full-CMOS 2-GHz WCDMA Direct Conversion Transmitter and Receiver", IEEE Journal of Solid-State Circuits, vol. 38, No. 1, Jan. 2003, pp. 43-53.

Leung, Vincent et al., "Digital-IF WCDMA Handset Transmitter IC in 0.25um SiGe BiCMOS", 2004 IEEE International Solid-State Circuits Conference, 2004, pp. 182-183.

Orsatti, Paolo et al., "A 20-mA-Receive, 55-mA-Transmit, Single-Chip GSM Transceiver in 0.25-um CMOS", IEEE Journal of Solid-State Circuits, vol. 34, No. 12, Dec. 1999, pp. 1869-1880.

Parssinen, Aarno et al., "A 2-GHz Wide-Band Direct Conversion Receiver for WCDMA Applications", IEEE Journal of Solid-State Circuits, vol. 34, No. 12, Dec. 1999, pp. 1893-1903.

Reynolds, S et al., "A Direct-Conversion Receiver IC for WCDMA Mobile Systems", Proceedings of the 2002 Bipolar/BiCMOS Circuits and Technology Meeting, 2002, pp. 61-64.

Rudell, Jacques C. et al., "Recent Developments in High Integration Multi-Standard CMOS Transceivers for Personal Communication Systems", Proceedings of the 1998 International Symposium on Low Power Electronics and Design, Aug. 10-12, 1998, pp. 149-154.

Rynanen, Jussi et al., "RF Gain Control in Direct Conversion Receivers", IEEE, 2002, pp. IV-117-IV-120.

Sanielevici, Sergio A. et al., "A 900-MHz Transceiver Chipset for Two-Way Paging Applications", IEEE Journal of Solid-State Circuits, vol. 33, No. 12, Dec. 1998, pp. 2160-2168.

Schuchter, Walter et al., "A Single Chip FSK/ASK 900MHz Transceiver in a Standard 0.25um CMOS Technology", 2001 IEEE Radio Frequency Integrated Circuits (RFIC) Symposium, 2001, pp. 183-186.

Tadjipour, Shahrzad, "A 900 MHz Dual Conversion, Low-IF CMOS GSM Receiver", A dissertation submitted in partial satisfaction of the requirements for the degree Doctor of Philosophy in Electrical Engineering, University of California, Los Angeles, 2001.

Tasic, Aleksandar et al., "Concept of Frequency-Transconductance Tuning of Bipolar Voltage-Controlled Oscillators", IEEE, 2002, pp. III-555-III-558.

Tasic, Aleksandar et al., "Concept of Phase-Noise Tuning of Bipolar Voltage-Controlled Oscillators", IEEE, 2002, pp. V-161-V-164.

Tsividis, Y., "Minimising power dissipation in analogue signal processors through syllabic companding", Electronic Letters, vol. 35, No. 21, Oct. 14, 1999, pp. 1805-1807.

Tsividis, Y. et al., "Internally Varying Analog Circuits Minimize Power Dissipation", IEEE Circuits & Devices Magazine, Jan. 2003, pp. 63-72.

Van Den Bos, Chris et al., "Architecture of a reconfigurable radio receiver front-end using overall feedback", Electronics Research Laboratory, Delft University of Technology, 2001.

Xiong, Wei et al., "An S-band Low-Noise Amplifier with Self-Adjusting Bias for Improved Power Consumption and Dynamic Range in a Mobile Environment", 1999 IEEE Radio Frequency Integrated Circuits Symposium, TUE5-4, 1999, pp. 193-196.

Yoshizawa, Atsushi et al., "An Anti-Blocker Structure MOSFET-C Filter for a Direct Conversion Receiver", IEEE 2001 Custom Integrated Circuits Conference, 2001, pp. 5-8.

Zargari, Masoud et al., "A Single-Chip Dual-Band Tri-Mode CMOS Transceiver for IEEE 802.11a/b/g WLAN", 2004 IEEE International Solid-State Circuits Conference, 2004, pp. 96-97.

"Notice of Allowance dated Jul. 18, 2018; U.S. Appl. No. 15/080,432", dated Jul. 18, 2018.

* cited by examiner

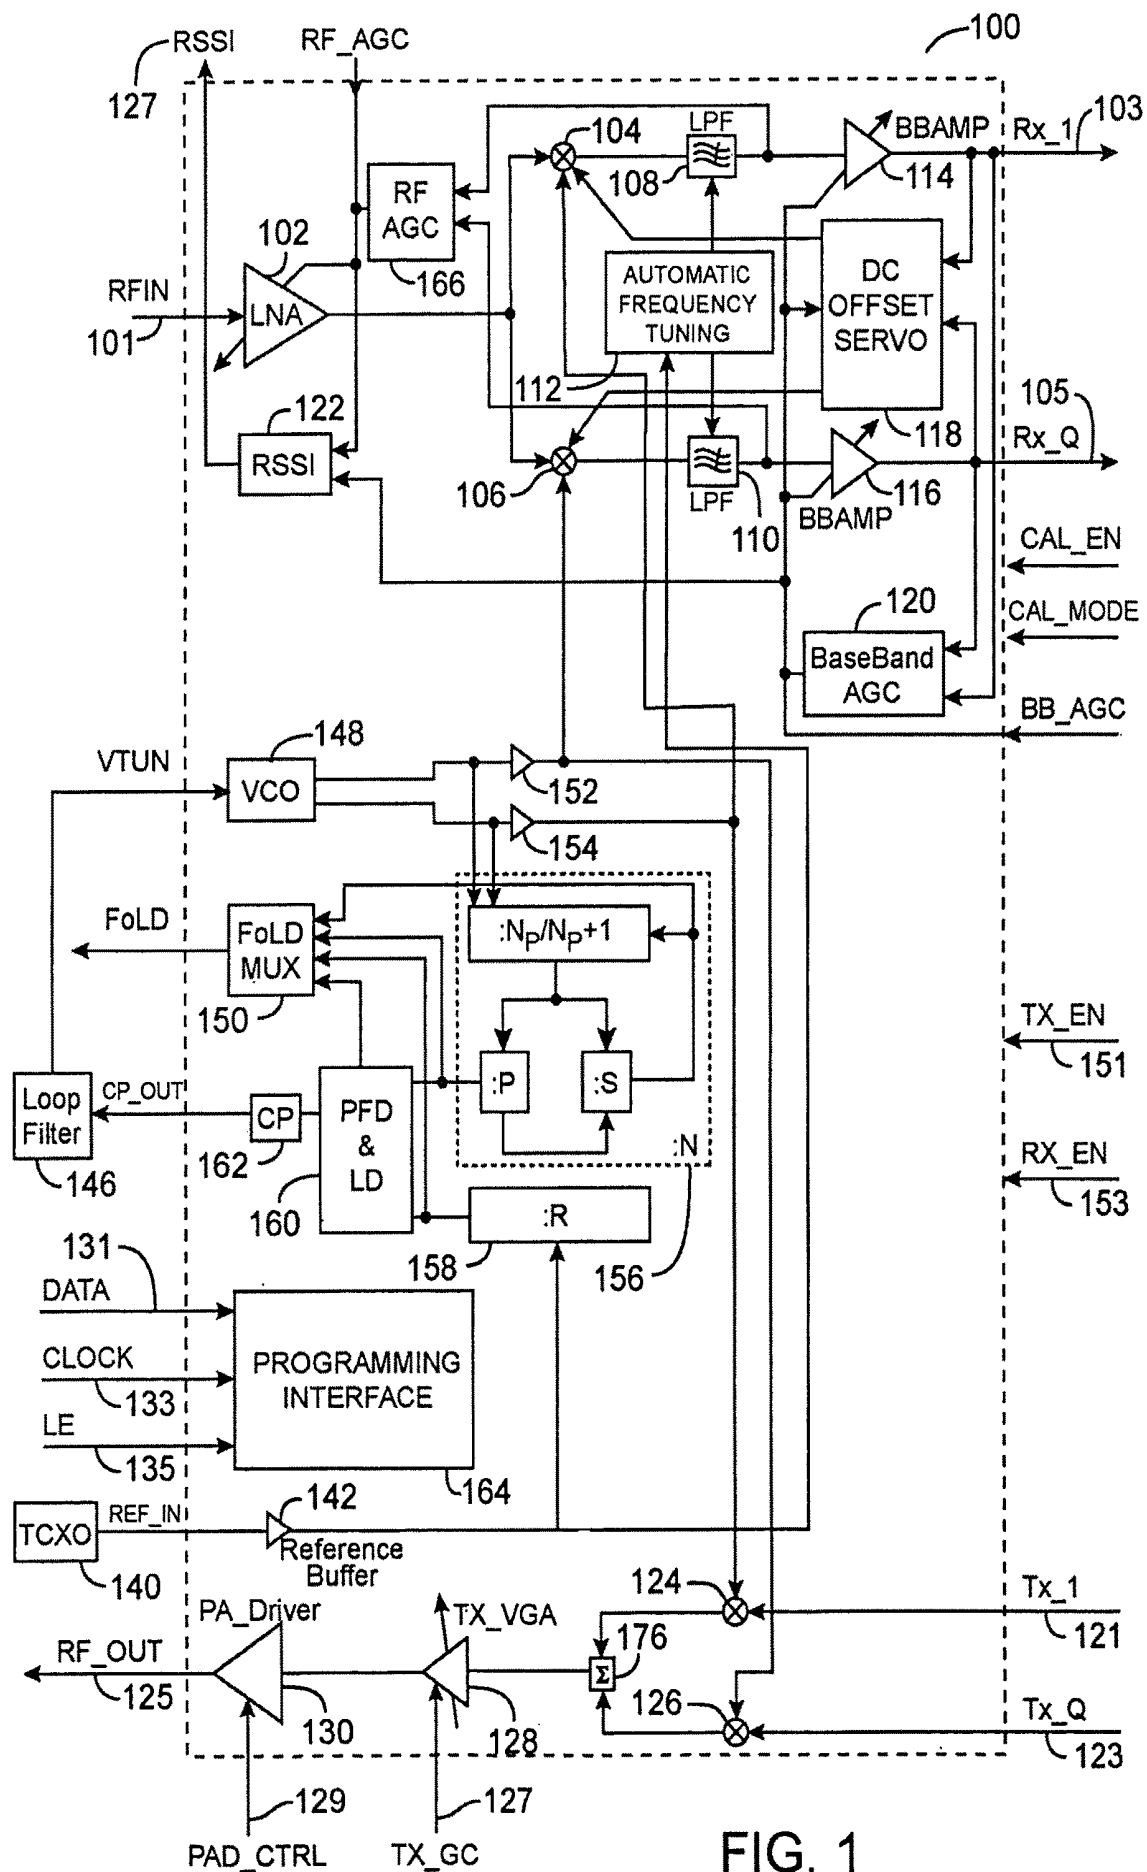


FIG. 1

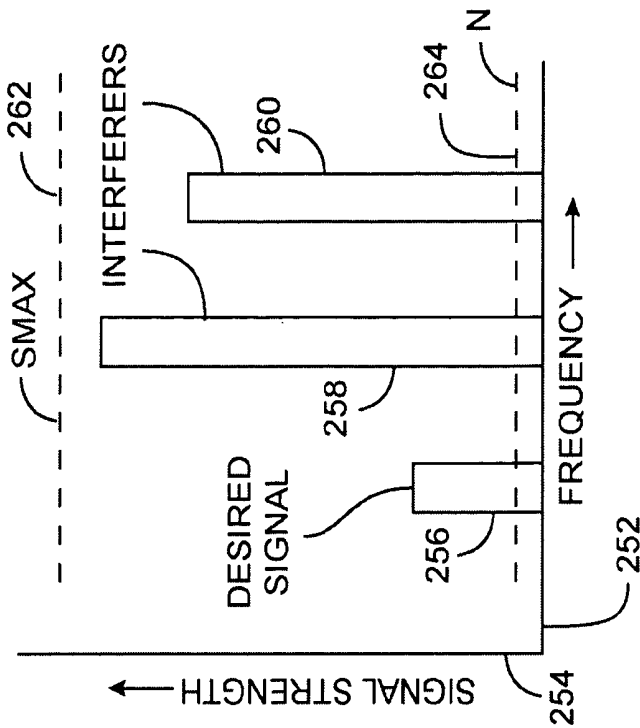


FIG. 2B

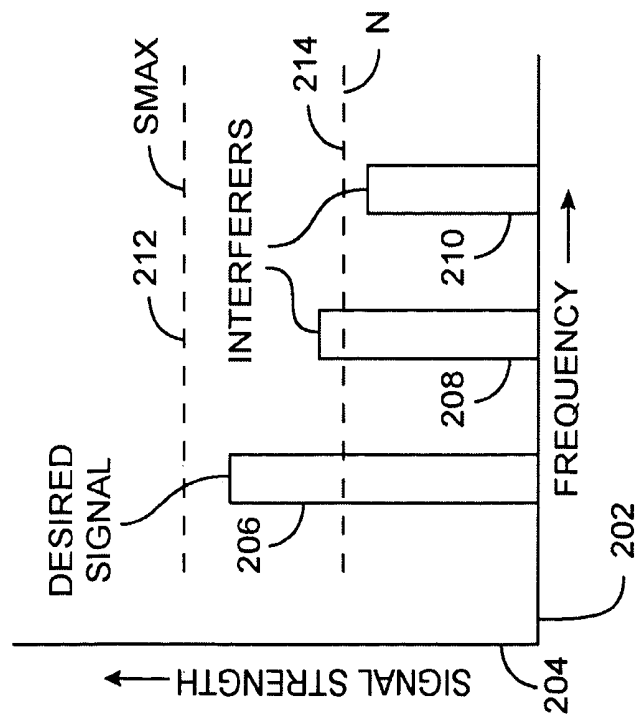


FIG. 2A

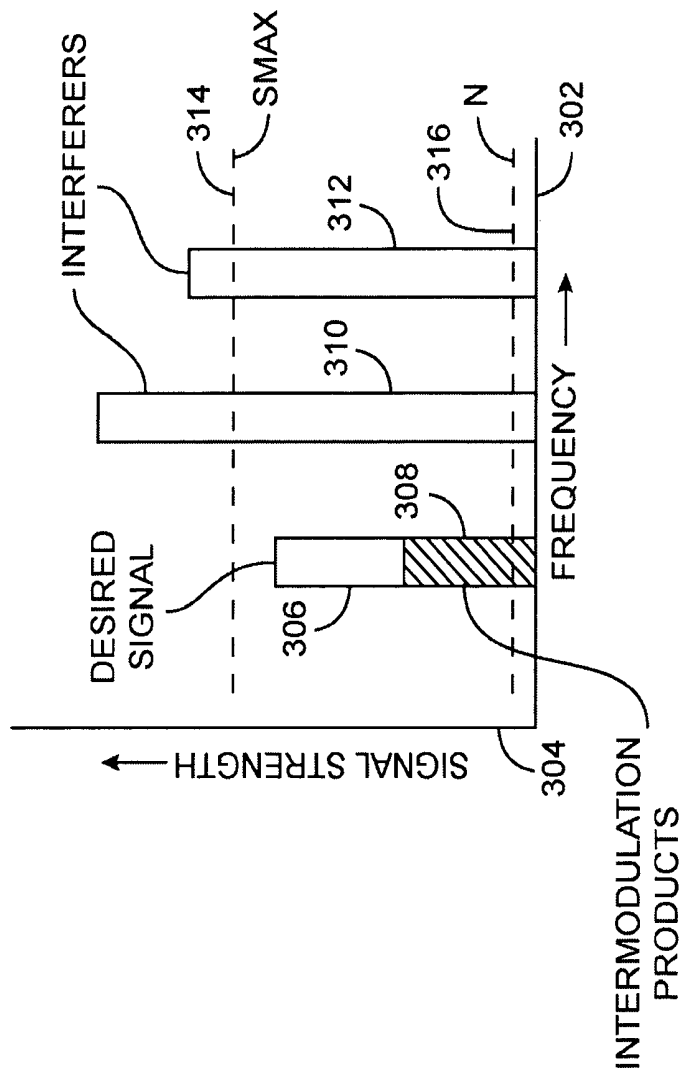


FIG. 3

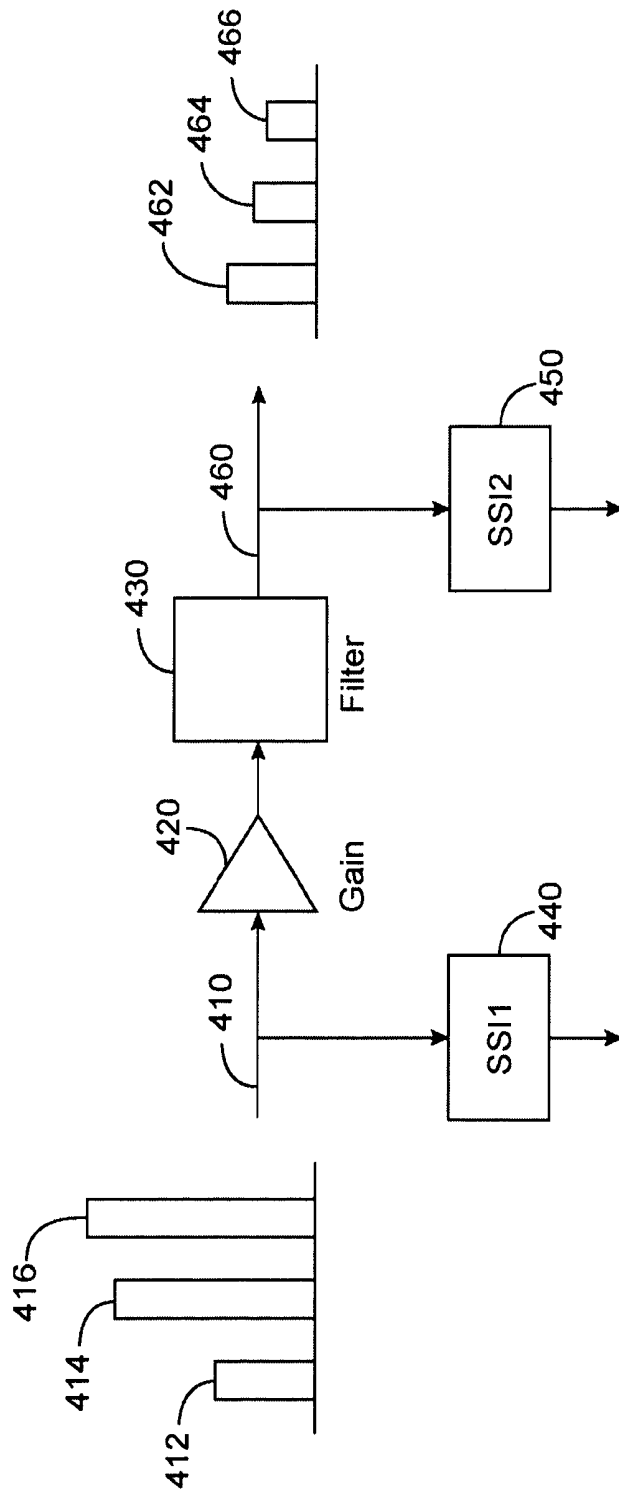


FIG. 4

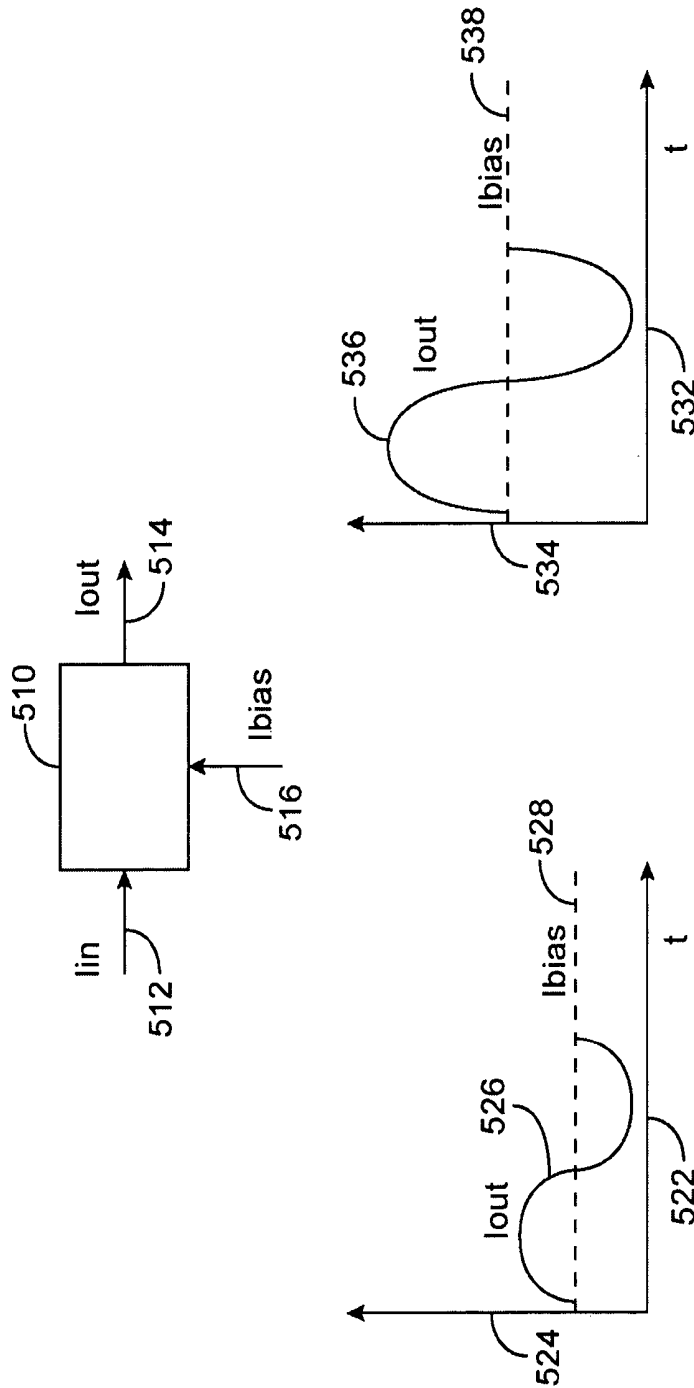


FIG 5

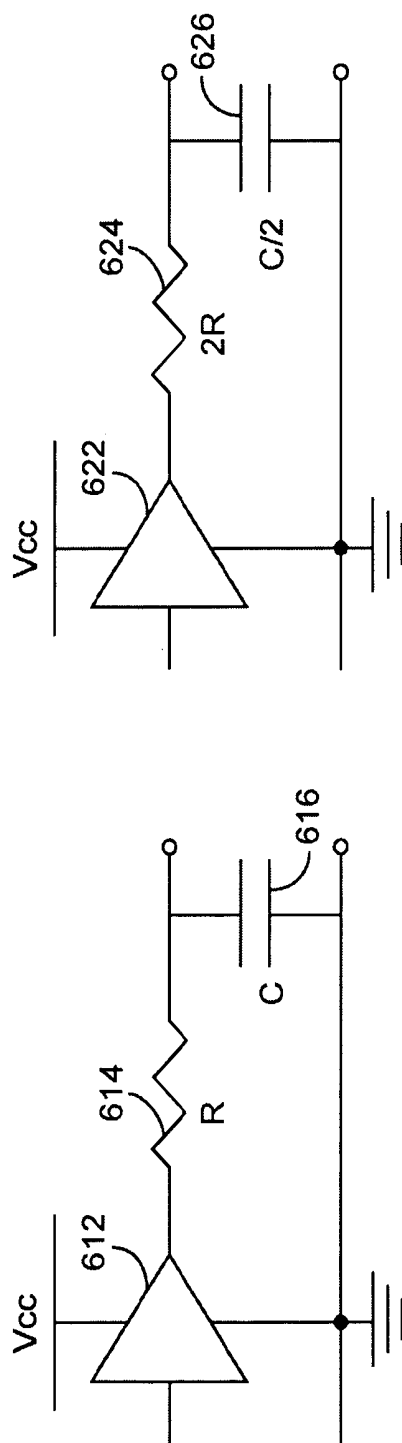


FIG 6

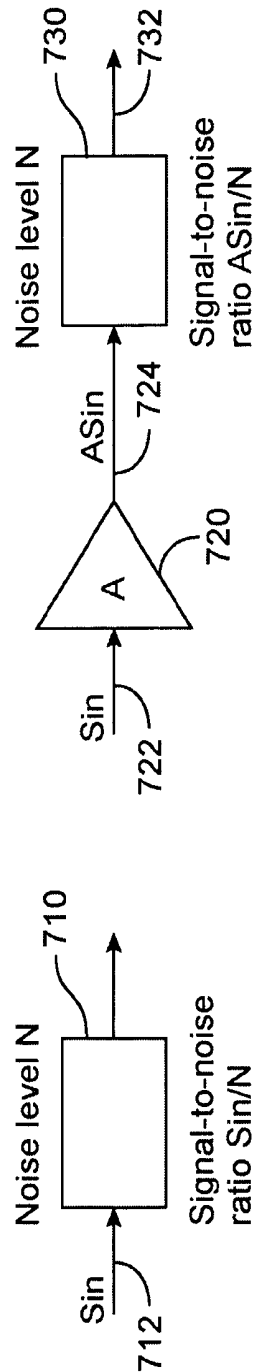


FIG. 7

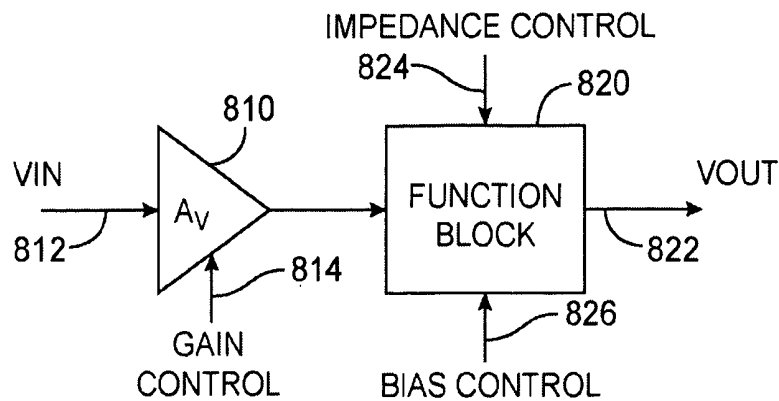


FIG. 8A

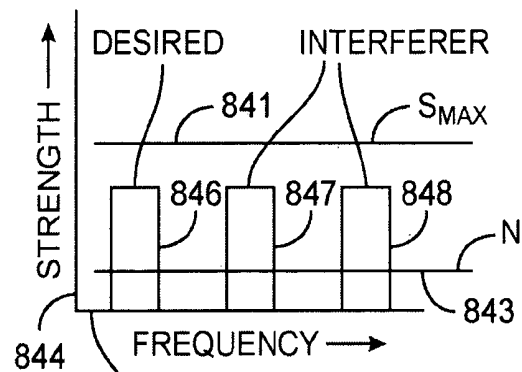


FIG. 8C

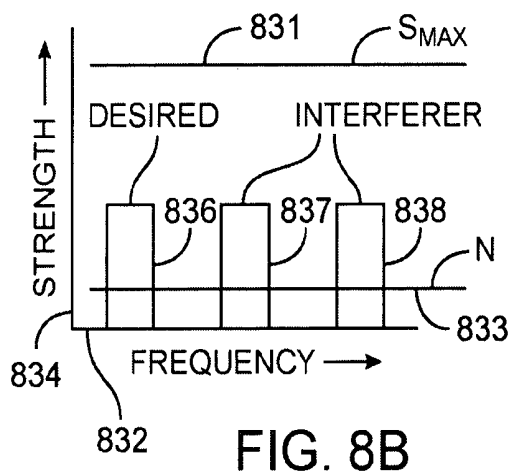


FIG. 8B

DECREASE
BIASING

-AND/OR-

INCREASE GAIN AND IMPEDANCES

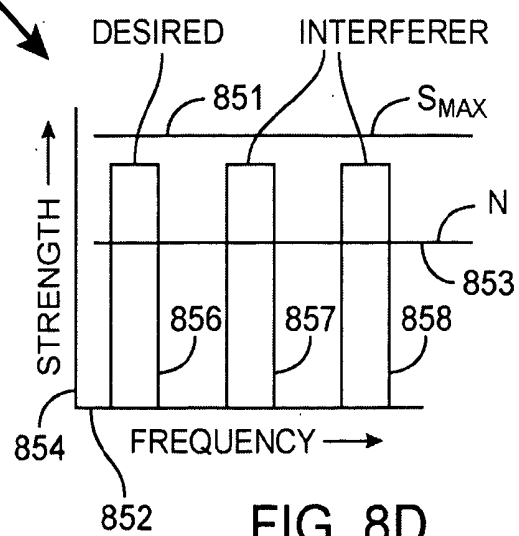


FIG. 8D

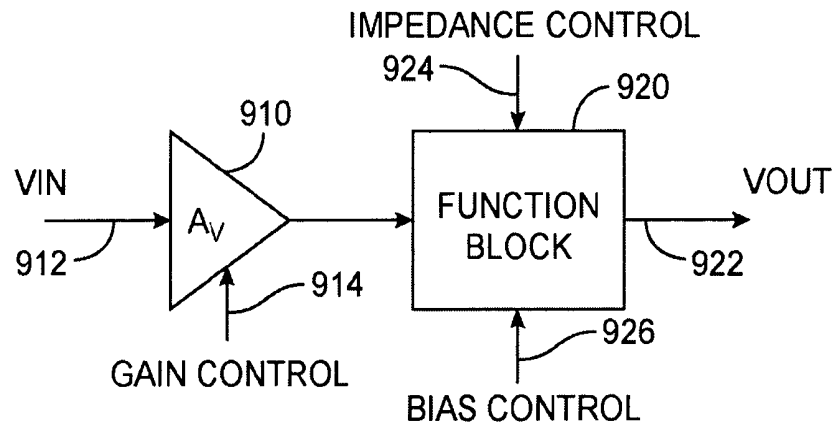


FIG. 9A

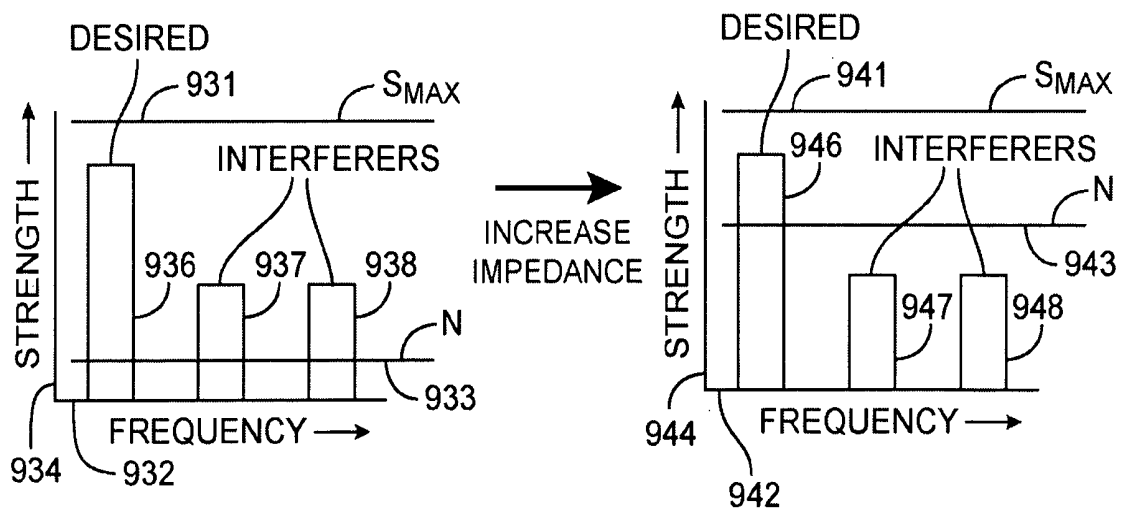


FIG. 9B

FIG. 9C

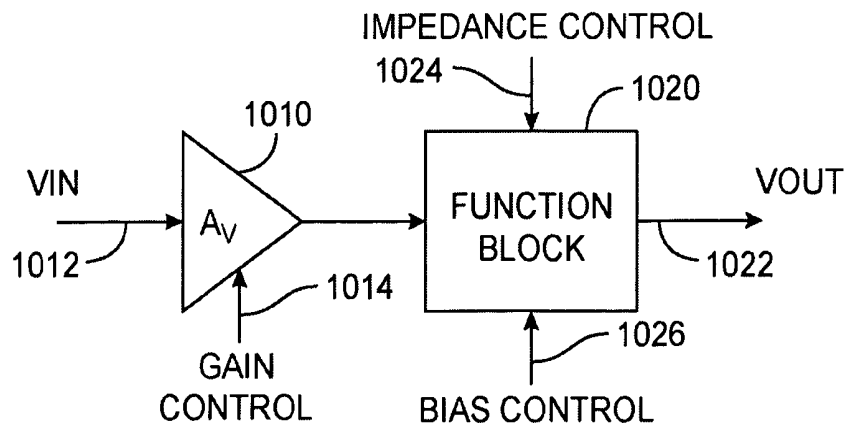


FIG. 10A

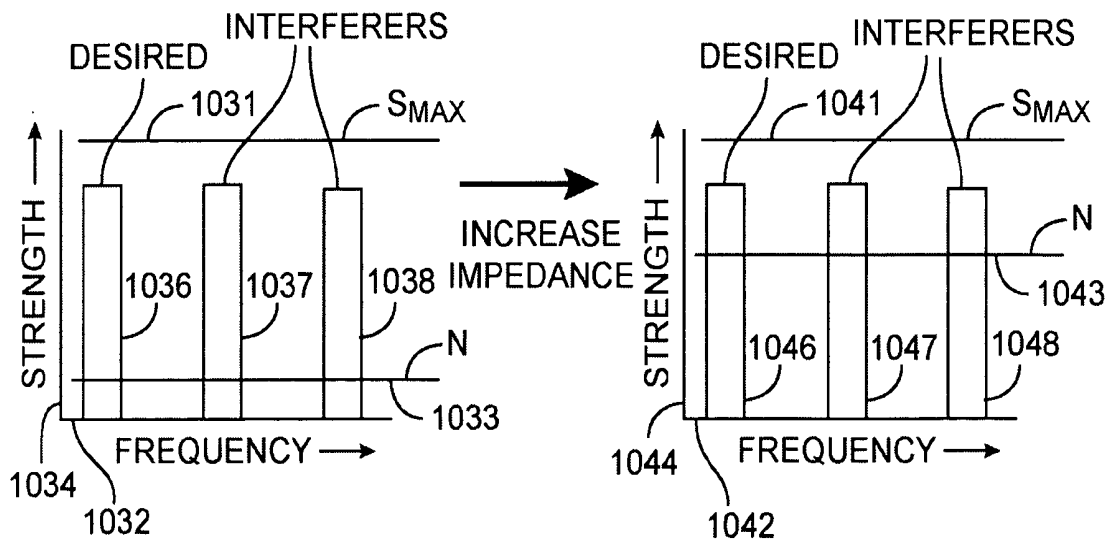


FIG. 10B

FIG. 10C

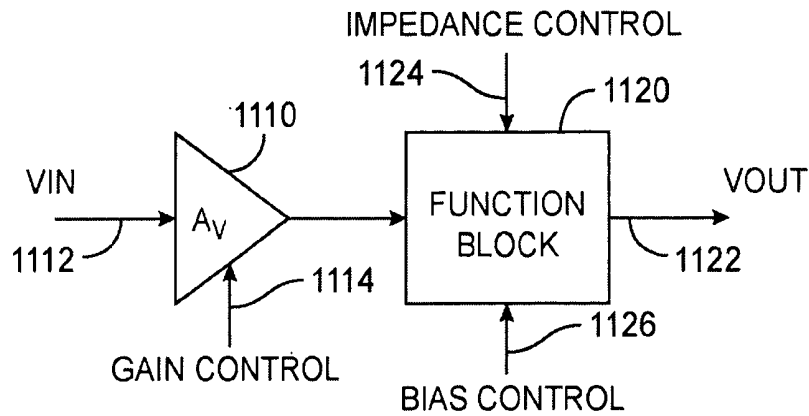


FIG. 11A

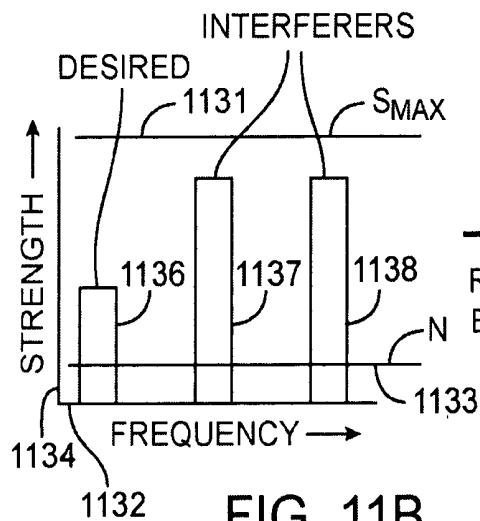


FIG. 11B

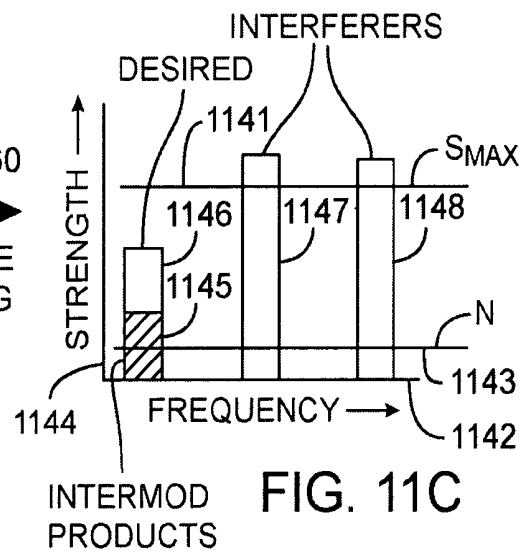


FIG. 11C

- AND/OR -

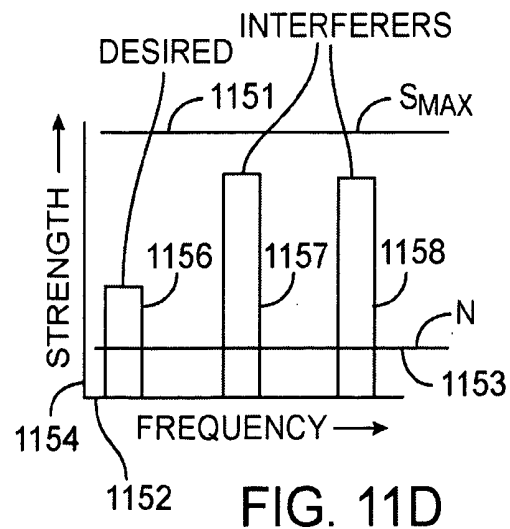
INCREASE
IMPEDANCE

FIG. 11D

1210 RECEIVED SIGNAL		1220 RESPONSE TO RECEIVED SIGNAL		
SIGNAL STRENGTH	INTERFERER STRENGTH	DECREASE SMAX	INCREASE IMPEDANCE NOT GAIN	INCREASE IMPEDANCE AND GAIN
1230 SMALL	SMALL	YES	NO	YES
1240 LARGE	SMALL	NO	YES	NO
1250 LARGE	LARGE	NO	YES	NO
1260 SMALL	LARGE	NO	NO	NO

FIG. 12

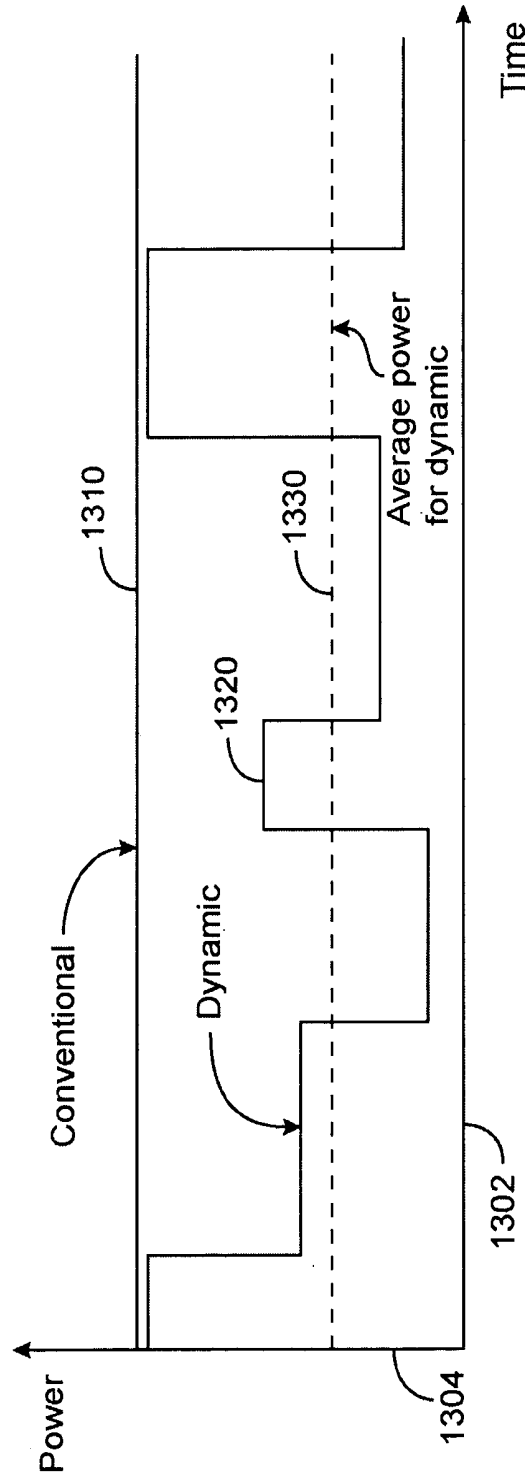


FIG 13

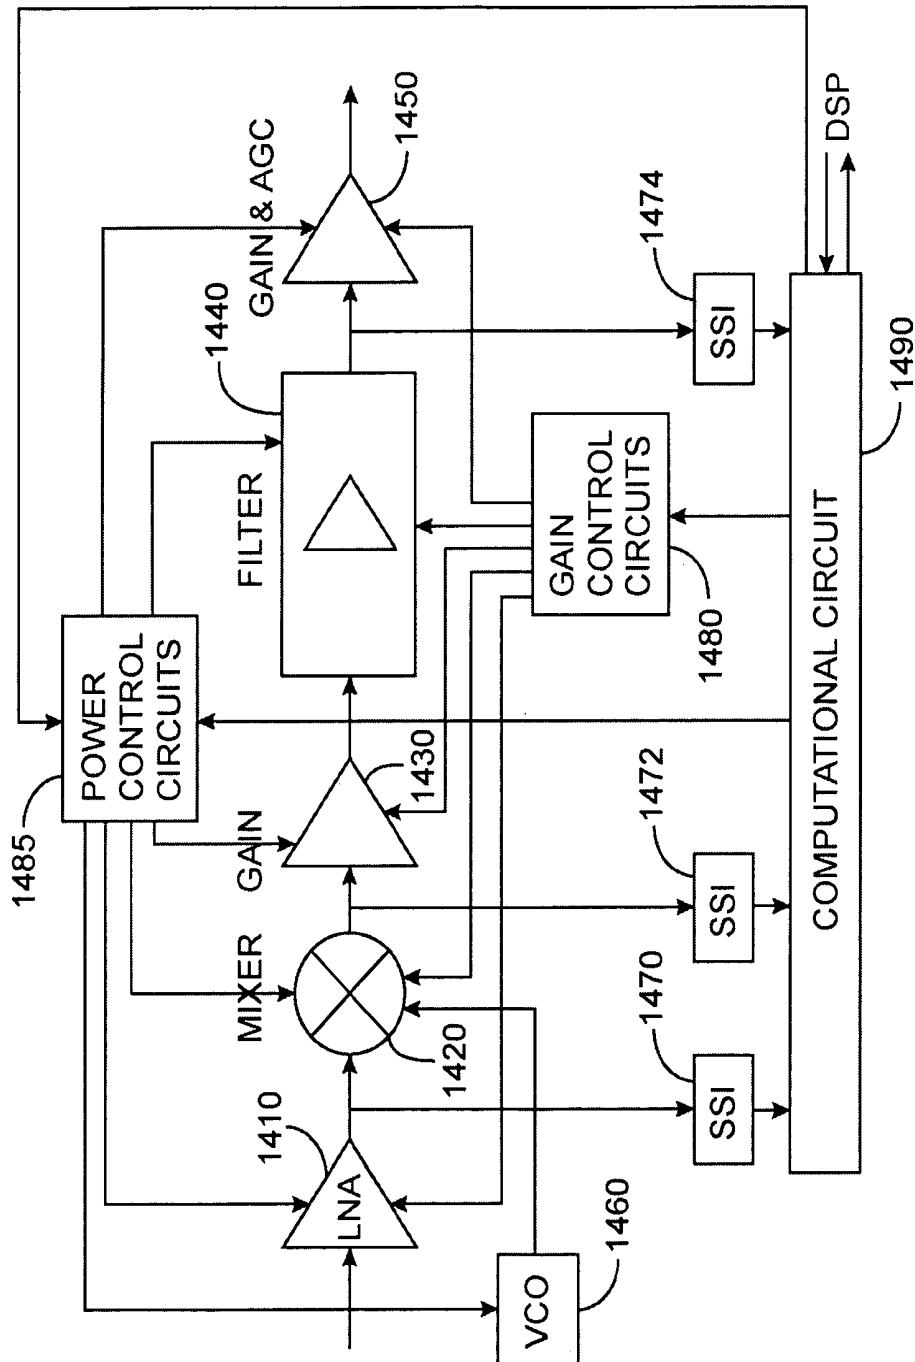


FIG. 14

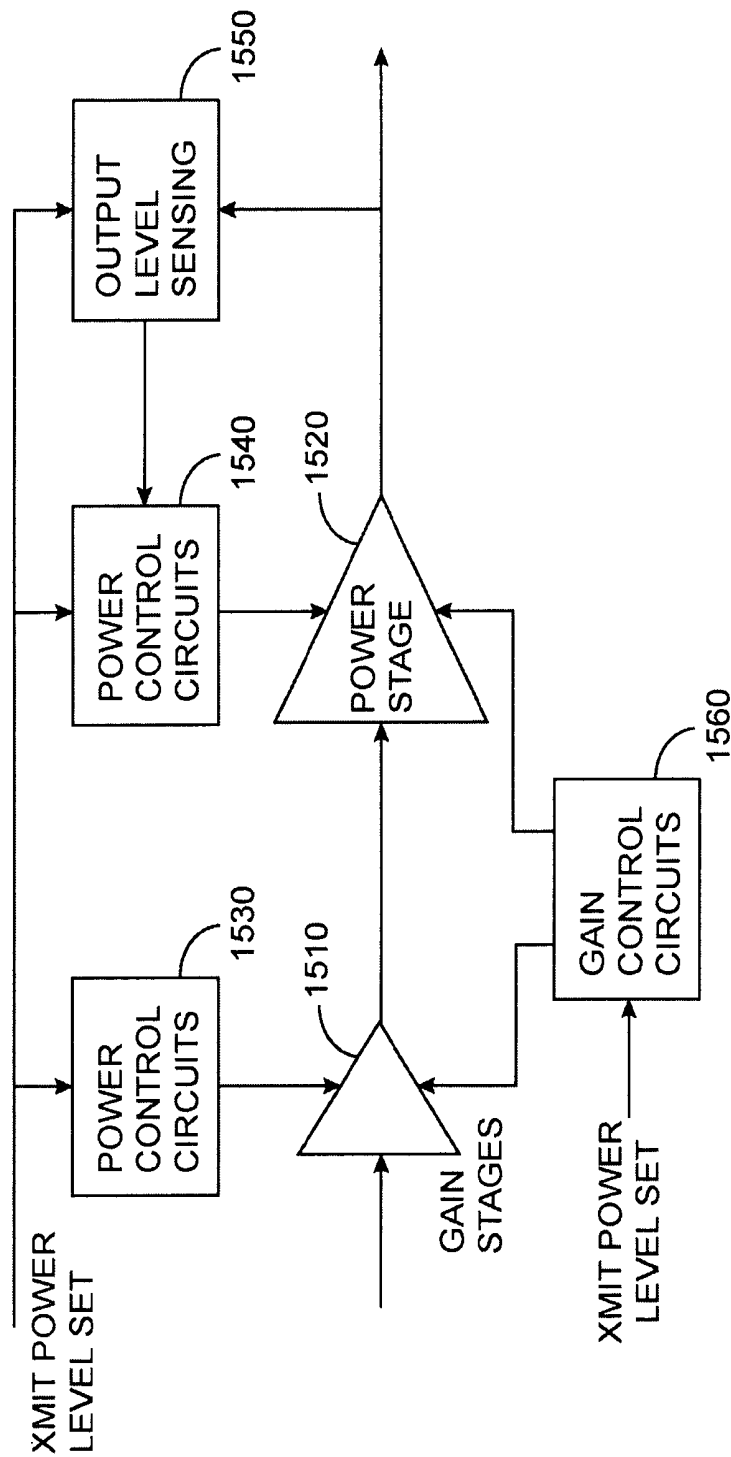


FIG. 15

1

POWER DISSIPATION REDUCTION IN WIRELESS TRANSCEIVERS

CROSS-REFERENCES TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 15/080,421, filed Mar. 24, 2016, which is a continuation of U.S. patent application Ser. No. 11/318,646, filed Dec. 27, 2005, which is a continuation of U.S. patent application Ser. No. 10/784,613, filed Feb. 23, 2004, which claims the benefit of U.S. provisional application No. 60/451,229, filed Mar. 1, 2003, which is incorporated by reference.

This application claims the benefit of U.S. provisional application No. 60/451,230, filed Mar. 1, 2003, which is incorporated by reference.

BACKGROUND

The present invention relates to power dissipation reduction techniques for electronic circuits, for example wireless transceiver integrated circuits.

Wireless networking is quickly becoming ubiquitous, as desktop, notebook, and handheld computers are connected to share Internet access and files. Wireless networking cards compatible with PCMCIA and compact flash form factors are popular for laptops and handhelds respectively, particularly as mobile users connect to the Internet on the road at coffee shops, hotels, and airports.

A downside of this connectivity is a corresponding drain on battery life, especially for these portable devices. The power consumed by a wireless transmitter and receiver reduces the usefulness of a device and sends a user on a hunt for an electrical outlet for recharging.

One reason why this power drain is high is that electronic circuits are typically designed to function properly under worst-case operating conditions. For a wireless transceiver, the worst case condition is when a desired signal reception strength is low, while other transceivers or nearby electronic equipment generate interfering signals and other spurious noise.

But a wireless transceiver does not always operate in these worst-case conditions. For example, a base station, router or access point may be nearby such that the received signal is strong. Also, there may be no interfering signals, or they may be relatively weak. In these situations, receiver circuit currents can be reduced below what is necessary for the worst case condition. If this is done, power dissipation is reduced, and battery life is increased.

Thus, what is needed are circuits and methods that can adapt to a better-than-worst-case condition and reduce circuit currents and therefore power dissipation accordingly.

SUMMARY

Accordingly, embodiments of the present invention provide methods and circuits for reducing power dissipation in wireless transceivers and other electronic circuits and systems. Embodiments of the present invention use bias current reduction, impedance scaling, gain, and other dynamic changes either separately or in combination to reduce power dissipation in response to better-than-worst case conditions. For example, bias currents are reduced in response to a need for reduced signal handling capability, impedances are scaled thus reducing required drive and other bias currents in response to a strong received signal, or gain is varied and

2

impedances are scaled in response to a low received signal in the presence of no or weak interfering signals. Alternately, currents may start low and be increased in response to worse-than-best-case conditions, or they may start at a point in between and vary up or down. These variations may be made to electronic systems generally, and are particularly suited and discussed below in the context of a wireless transceiver that may be used in networking devices, cellular telephones, and other wireless systems.

10 An exemplary embodiment of the present invention provides a method of receiving a signal using an integrated circuit. The integrated circuit includes a signal path having a low-noise amplifier configured to receive the signal, a mixer having an input coupled to an output of the low-noise amplifier, and a low-pass filter having an input coupled to an output of the mixer. The method itself includes determining a first signal strength at a first node in the signal path in the integrated circuit and dynamically changing an impedance of a component in the signal path based on the first signal strength.

20 A further exemplary embodiment of the present invention provides a method of receiving a signal using an integrated circuit. The integrated circuit includes a signal path having a low-noise amplifier configured to receive the signal, a mixer having an input coupled to an output of the low-noise amplifier, and a low-pass filter having an input coupled to an output of the mixer. The method itself includes determining a first signal strength at a first node in the signal path in the integrated circuit and dynamically changing a bias current in the signal path based on the first signal strength.

30 Another exemplary embodiment of the present invention provides a method of receiving a signal using an integrated circuit. The integrated circuit includes a signal path having a first circuit and a second circuit having an input coupled to an output of the first circuit. The method itself includes determining a first signal strength at a first node in the signal path in the integrated circuit. The first node is before the first circuit in the signal path. The method further includes dynamically changing a gain of the first circuit based on the first signal strength and dynamically changing an impedance of a component in the second circuit based on the first signal strength.

40 Still a further exemplary embodiment of the present invention provides a wireless transceiver integrated circuit including a receiver having a signal path, the signal path including a low-noise amplifier, a mixer having an input coupled to an output of the low-noise amplifier, and a low-pass filter having an input coupled to an output of the mixer, as well as a first signal strength indicator circuit coupled to the signal path and configured to determine a first signal strength. An impedance in the signal path is configured to be dynamically adjusted in response to the first signal strength.

50 Yet a further exemplary embodiment of the present invention provides a wireless transceiver integrated circuit. This integrated circuit includes a receiver comprising a signal path, the signal path having a low-noise amplifier, a mixer having an input coupled to an output of the low-noise amplifier, and a low-pass filter having an input coupled to an output of the mixer, as well as a first signal strength indicator circuit coupled to the signal path, and configured to determine a first signal strength. A bias current in the signal path is configured to be dynamically adjusted in response to the first signal strength.

65 Another exemplary embodiment of the present invention provides a wireless transceiver integrated circuit. This circuit includes a receiver comprising a signal path, the signal

path having a first circuit; and a second circuit having an input coupled to an output of the first circuit; as well as a first signal strength indicator circuit coupled to the signal path, and configured to determine a first signal strength. A gain of the first circuit is configured to be dynamically adjusted in response to the first signal strength, and an impedance in the second circuit is configured to be dynamically adjusted in response to the first signal strength.

A better understanding of the nature and advantages of the present invention may be gained with reference to the following detailed description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a wireless transceiver that may benefit by incorporation of embodiments of the present invention;

FIGS. 2A and 2B illustrate examples of desired and interfering signals and noise that may be received by a circuit in a wireless receiver;

FIG. 3 illustrates what can occur as a maximum signal handling capability is reduced in the worst-case signal condition;

FIG. 4 illustrates a portion of a receiver consistent with an embodiment of the present invention;

FIG. 5 illustrates the relationship between a required bias current and a given output signal for a representative circuit;

FIG. 6 is an example of how a circuit's impedances may be scaled to reduce drive currents, and depending on the circuit configuration used, to reduce associated bias currents as well;

FIG. 7 illustrates how gain may be inserted in a signal path to improve a circuit's signal to noise ratio;

FIGS. 8A-8D illustrate some of the possible power saving techniques that may be used when received desired and interferer signals are all at a low power level;

FIGS. 9A-9C illustrate one of the possible power saving techniques that may be used when a received desired signal is strong while all interfering signals are at a low power level;

FIGS. 10A-10C illustrate one of the possible power saving techniques that may be used when received desired and interferer signals are all at a high power level;

FIGS. 11A-11D illustrate one of the possible power saving techniques that may be used when a received desired signal is weak while one or more interfering signals are strong;

FIG. 12 is a summary illustrating four different input conditions and some of the appropriate power-saving changes that may be made in response to those conditions;

FIG. 13 shows how power may be saved as a function of time by employing one or more of the power saving methods consistent with embodiments of the present invention;

FIG. 14 is a block diagram of a portion of a receiver consistent with an embodiment of the present invention; and

FIG. 15 is a block diagram of a portion of a transmitter consistent with an embodiment of the present invention.

DESCRIPTION OF EXEMPLARY EMBODIMENTS

FIG. 1 is a block diagram of a wireless transceiver that may benefit by incorporation of embodiments of the present invention. This wireless transceiver may be designed to send and receive signals consistent with the IEEE 802.11a, 802.11b, 802.11g, or other signaling standard or combina-

tion of standards. This figure, as with all the included figures, is shown for illustrative purposes only and does not to limit either the possible embodiments of the present invention or the claims.

There are three main portions of this transceiver circuit, a receiver, transmitter, and synthesizer. This transceiver may be completely or partially integrated on a semiconductor chip, or it may be integrated onto multiple integrated circuits. In a specific embodiment, the circuitry bounded by dashed line 100 is integrated on a single chip coupled to one or more external components or circuits. The integrated circuit or circuits forming this wireless transceiver may incorporate various integrated circuit devices such as a bipolar, CMOS, or BiCMOS devices made using a silicon, silicon-germanium (SiGe), gallium arsenide or other III-V process, or other manufacturing process. Embodiments of the present invention may also be applicable to circuits manufactured using nanotechnology processing.

The receiver includes a signal path formed by low-noise amplifier 102, I and Q mixers 104 and 106, low pass filters 108 and 110, and baseband amplifiers 114 and 116. Other circuitry in the receiver includes received strength indicator 122, automatic gain control circuit 166, baseband gain control circuit 120, tuning circuit 112, and offset cancellation circuit 118.

The transmitter includes input up-converter mixers 124 and 126, summing node 176, which may be conceptual rather than an actual circuit, transmit variable gain amplifier 128, and power amplifier 130.

The synthesizer includes a voltage-controlled oscillator 148, which drives I and Q buffers 154 and 152, prescaler 156, reference clock buffer 142 and divider 158, phase-frequency detector 160, charge pump 162, and loop filter 146, which in a specific embodiment is formed by external components.

Signals are received on an antenna, not shown, and typically pass through an RF switch and bandpass filter before being received by the low-noise amplifier 102 on line 101. The low noise amplifier gains the received signal and provides it to quadrature mixers 104 and 106. I and Q mixers 104 and 106 down-convert the received signal to baseband by multiplying them with quadrature versions of the oscillator signal provided by buffers 152 and 154. This down conversion also produces a high frequency component at a frequency that is equal to the sum of the frequencies of the received signal and the VCO. This unwanted signal is filtered by low pass filters 108 and 110, which in turn drive baseband amplifiers 114 and 116. The outputs of baseband amplifiers 114 and 116 are typically converted to digital signals by analog-to-digital converters at the front end of a digital signal processing block.

In the transmit mode, I and Q versions of the signal to be transmitted are provided on lines 121 and 123 to up-convert mixers 124 and 126. These up-convert mixers multiply the I and Q portions of the transmit signal by quadrature versions of the VCO signal provided by buffers 152 and 154. The outputs of the up-convert mixers 124 and 126 are summed, and amplified by transmit VGA 128, which in turn drives power amplifier 130. The output of power amplifier 130 is typically filtered, and passes through the RF switch to the antenna for transmission.

A reference clock is received and buffered by the reference buffer 142. The VCO generates quadrature oscillatory signals that are divided by prescaler 156. The reference clock is typically generated by a crystal or other stable periodic clock source. The phase-frequency detector 116 compares the phase or frequency (depending on whether the

synthesizer is tracking or acquiring the correct frequency) of the divided VCO signal and the reference clock, or a divided version of the reference clock, and generates an error signal, which drives the charge pump 162. The output signal of the charge pump 162 is filtered by the loop filter 146, which is commonly a lead-lag filter, and which provides a tuning or correction signal to the VCO 148.

Embodiments of the present invention may be used to reduce the power dissipation of one or more of these included circuits. For example, the power dissipation in the low-noise amplifier 102, down-convert mixers 104 and 106, low pass filters 108 and 110, or baseband amplifiers 114 and 116 may be optimized. Also, power dissipation in up-convert mixers 124 126, variable gain amplifier 128, and power amplifier 130 may also be optimized. Similarly, VCO 148 and prescaler 156 currents may be adjusted. Embodiments of the present invention may also be applied in other circuits which may be included in other integrated circuit receivers, transmitters, transceivers, or other electronic circuits or systems.

When a receiver is actively receiving a desired signal, each block in the signal path has at its input the desired signal as well as noise and possibly interfering signals. The desired signal is the useful, information-carrying portion of a received signal. The noise may be thermal, shot, or other noise generated on the integrated circuit, in addition to received noise generated by sources external to the chip. The noise at the input of a block may be referred to as the equivalent input noise. The interfering signal or signals, or interferers, may be generated by similar transceivers, or other electrical equipment, circuits, or systems.

FIGS. 2A and 2B illustrate examples of desired signals, interferers, and noise that may be received by one of the various circuits in a wireless receiver. In each of these figures, the signal strength is plotted along a Y-axis 204 or 254 as a function of frequency along an X-axis 202 or 252. In the example of FIG. 2A, a received desired signal 206 is large in comparison to interfering signals 208 and 210. In these examples, two interfering signals are shown for illustrative purposes, though there may be no such signals, one such signal, or more than two such signals in the frequency range of interest. Also, while for these examples the interferers are shown as being at a higher frequency than the desired signal, there may be one or more interferers at higher or lower frequencies as the desired signal. In this specific example, the acceptable noise floor 214 is relatively high, while maximum signal handling capability S_{max} 212 (that is the maximum signal power that can be handled with an acceptably low distortion) needs only to be high enough to accommodate the desired signal. For this specific example, the circuit receiving this input spectrum only requires a relatively small dynamic range for proper operation, that is the range between S_{max} 212 and the noise floor 214 is relatively small.

Conversely, in the example shown in FIG. 2B, the desired signal 256 is relatively weak compared to the large interferers 258 and 260. In this example, the noise floor 264 should be relatively low so as to prevent an unacceptable level of error in the recovery the desired signal 256. The maximum signal handling capability S_{max} 262 should be relatively high to accommodate the large interferers in order to avoid the creation of intermodulation products as described below. Accordingly, in this specific example, the circuit receiving this input spectrum should have a large dynamic range, particularly in comparison to the example of FIG. 2A.

It should be noted that the noise level or noise floors shown in these and the other included figures is the noise density integrated over the bandwidth of interest. For simplicity and comparison, this level is shown as a horizontal line, and is not meant to imply noise density.

Often in wireless receivers, a circuit at different times will receive an input spectrum similar to those shown in FIGS. 2A and 2B. The input spectrum of FIG. 2B is generally considered the worst-case input signal, and typical design methodology involves designing a receiver for this condition, specifically the weakest desired signal accompanied by largest interference level. Circuit impedances and currents are set such that the noise floor 264 is sufficiently low for an acceptable bit-error rate, while bias currents are set sufficiently high for the required S_{max} 262.

Conversely, the input spectrum in FIG. 2A is that of the best-case input signal, specifically, a robust desired signal accompanied by no or low-level interferers. In this case, the noise floor 214 may be allowed to rise, while the maximum signal handling capability S_{max} 212 may be reduced. When this is done, the receiver circuit may save significant power. For example, the circuit's impedances may be increased, thus reducing required drive currents. Similarly, bias currents may be lowered, thus reducing the maximum signal in handling capability.

The minimum power dissipation for a circuit is proportional to the required maximum signal-to-noise ratio, which is the ratio between S_{max} 212 or 262 and N 214 and 264. Thus, a circuit receiving an input similar to the one shown in FIG. 2A can dissipate less power than one receiving the input as shown in FIG. 2B, while still achieving an acceptable bit-error rate.

FIG. 3 illustrates what can occur when the maximum signal handling capability S_{max} 314 is reduced in the worst-case condition, that is when a weak desired signal 306 is accompanied by large interferers 310 and 312. Again, signal strength is plotted along a Y-axis 304 as a function of frequency along X-axis 302. In this specific example, S_{max} 314 is reduced below the peak levels of the interferers 310 and 312. Since S_{max} is low, the circuit cannot handle the interferers linearly. The resulting nonlinearities lead to a mixing of the interferers and the creation of intermodulation products 308 (for example, a third-order intermodulation distortion, IM3), one of which in this example occurs at the same frequency as the desired signal 306. As can be seen, if the intermodulation products 308 become excessive, the received signal bit error rate may become excessive, and the desired signal 306 may be lost. Accordingly, while S_{max} may be lowered even under some unfavorable conditions in order to reduce power, care should be taken to avoid corruption of the received desired signal.

FIG. 4 illustrates a portion of a receiver consistent with an embodiment of the present invention. Included is a filter 430. An optional gain element 420 is placed in front of the filter 430 in order to increase signal levels. Signal strength indicator circuits 440 and 450 are connected to input line 410 and output line 460. In this specific example, the input signal spectrum on line 410 is shown as desired signal 412 and interferers 414 and 416. The signal spectrum at the output line 460 is shown as desired signal 462 and interferers 464 and 466. The signal strength indicators 440 and 450 do not provide information as to the relative sizes of the desired and interfering signals. Rather, a cumulative signal level is provided at their outputs. For example, the first signal strength indicator 440 outputs a level corresponding to the sum of desired signal 412 and interfering signals 414 and 416, while the second signal strength indicator 450 provides

a signal level corresponding to the sum of desired signal **462** and interfering signals **464** and **466**. In this specific example, the gain of the gain and filter circuit combinations is shown as approximately one, while the interfering signals **414** and **416** signal levels are reduced.

A comparison of the signal levels provided by the signal strength indicators **440** and **450** indicates that much of the combined received signal on line **410** has been filtered. Accordingly, it may be deduced that large interfering signals present at the input are being filtered by the filter **430**. From this information, as will be shown in greater detail below, the bias, impedance, and gain of the gain stage **420** and filter **430** combination may be optimized to reduce power dissipation.

There are several real world situations where the received signal is better than the worst-case condition such that power can be saved. For example, large interferers may be present only part of the time, that is, on a temporary or transient basis. The interfering equipment may be some distance from the transceiver, or it may be operating in the low power mode. Also, the desired signal may be very strong as compared to the noise and interferers, for example a hub, router, or access point may be nearby.

Some transceivers consistent with embodiments of the present invention are designed to work with more than one data transfer specification or standard. In this case, when a transceiver is operating in a mode having a lower data rate, the power saving techniques described here may be employed.

FIG. 5 illustrates the relationship between a required biased current **516** for a given output signal **514** for a representative circuit **510**. If the output signal current level is relatively low, such as the output current shown as **526**, the corresponding bias current **528** may be low. Conversely, if the output signal current level is larger as with the example **536**, the corresponding bias current level **538** should also be high. Accordingly, if a bias current is initially set high to handle large a large input signal, for example a large interferer, this current may be reduced if the input signal is smaller.

There are many ways by which these bias currents can be reduced. For example, the current may be generated by placing a voltage across a resistor by applying a bias voltage to the base of a device whose emitter is connected to ground through a resistance. In this case, the resistor may be increased by opening switches across portions of the resistance, or lowering the bias voltage applied at the base. Several ways in which this may be done will be readily understood by one skilled in the art.

FIG. 6 is an example of how a circuit's impedances may be scaled to reduce drive currents, and, depending on the circuit configuration used, associated bias currents as well. A driver **612** has a load R **614** and C **616**. The frequency response of this circuit is the same as that seen by driver **622**, which drives an impedance of $2R$ **624** and $C/2$ **626**. But the impedance of the load seen by driver **622** is double that seen by **612**, thus the output current required by the driver **622** is reduced by one-half.

As an example, the output stage of each of these drivers may be a Class A emitter follower formed by an emitter follower connected to a current source. When the outputs are driven high, the emitter of driver **622** need supply only one-half the drive current as driver **612**. In this way, an impedance can be scaled in order to decrease a circuit's required drive current.

Also, the discharge current for driver **622** is only one half that of driver **612** for a given negative-going slew rate. Thus, the current source of **622** may be reduced by the same factor

of one-half as compared to driver **612**. In this example, the bias current, that is the current in the pull-down current source can be reduced. Many other examples where drive currents and possibly bias currents may be reduced will be appreciated by one skilled in the art.

FIG. 7 illustrates another degree of freedom that made be employed to reduce current levels in a transceiver. Specifically, a gain element **720** may be inserted in front of a circuit block **730** in order to improve the combined circuit's signal-to-noise ratio by a factor equal to the gain of the inserted gain block. This is particularly useful when large interferers are absent and the desired received signal is moderate or low. Specifically, gain is added to the signal while impedances are increased, which raise the noise floor. In this way, a given signal-to-noise ratio may be maintained while the power is decreased.

The gain of such an element may be varied by increasing a current in a differential pair or increasing a load resistance using switches. Many other examples where the gain of this element may be varied will be appreciated by one skilled in the art.

These variables, or degrees of freedom, specifically reducing bias currents, increasing impedances, and increasing gain may be used as in the following examples.

FIG. 8A is a block diagram of a functional block **820** and optional gain element **810** in accordance with an embodiment of the present invention. Functional block **820**, like the functional blocks in the following diagrams, may be a filter, mixer, amplifier, or other circuit or circuits in a wireless transceiver or other electronic circuits or system. An input signal is received on line **812** by the optional gain element **814**. When the optional gain block **810** is not used, the input signal may be received directly by the function block **820**. The gain of the optional gain element **812** is controlled by a gain control signal on line **814**. The functional block receives an output signal from the optional gain element **810** and provides an output VOUT on line **822**. The lines in this and the other included figures may be one or more lines, depending on whether single-ended, differential, or other type of signaling is employed.

One or more impedances are under control of signals on impedance control lines **824**. Similarly, one or more bias currents in the function block are under control of one or more signals on bias control lines **826**. These various control lines may be logic signals, analog signals, voltage or currents lines, or other signal or bias lines. In other embodiments of the present invention, the gain control element **810** may be included in the function block **820**. Also, various embodiments may not incorporate either or both the impedance control and bias control.

FIG. 8B is an example input that may be present on line VIN **812**. In this example, a desired signal **836** is relatively weak, as are interfering signals **837** and **838**. The initial bias and circuit configuration is such that the noise floor **833** and maximum signal handling capability S_{max} **831** are adjusted for worst case conditions. The circuit of FIG. 8A, as with all the circuits described here, receives noise at its input which may be referred to as input equivalent noise or input referred noise. Additionally, the circuit of FIG. 8A generates noise which is added to the input referred noise. Depending on the gain characteristics of the circuitry, the output noise at various frequencies may be greater than, equal to, or less than the input referred noise. For simplicity, the noise floor and maximum signal handling capability S_{max} , in this and the other figures, are shown as straight lines, though the noise and S_{max} are typically curved as a function of frequency.

That the input spectrum is as shown in FIG. 8B can be determined, for example, by low signal strength indications on line VIN 812 and VOUT 822. That is, a low level signal strength indication on line VIN 812 indicates that no portion of the input signal is particularly large.

For this exemplary input, there are at least two methods by which the power dissipation for this circuitry may be reduced. Depending on the exact circuits and structures used, one of these methods may be preferred.

In FIG. 8C, the bias current is decreased, thereby lowering the maximum signal handling capability 841 as compared to 831, closer to the desired and interfering signal levels. Again, the bias currents in the function block 820 may be reduced by switching impedances that appear across a voltage thereby changing a resulting bias current, by reducing a voltage at the gate of a MOS or base of a bipolar transistor, or by other methods.

In FIG. 8D, a second method of reducing power dissipation in the function block 820 is employed. Specifically, Smax 851 is held constant as compared Smax 831. The desired and interfering signals are amplified such that they are closer to the available signaling handling capability 851. Also, the noise floor 853 is raised as compared to noise floor 833 in FIG. 8B. Specifically, the noise contributed by the function block 820 is increased, such that the noise at its output is increased to noise floor 853. This is done by increasing one or more impedance in function block 810, such that drive currents inside that block are reduced. Depending on the exact configuration, this may also allow some biasing currents to be reduced, while maintaining the maximum signal handling capability 851 at a sufficient level. Alternately, these two methods of reducing power dissipation in function block 820 may be done in combination.

The included examples are explained for the exemplary situation where biasing and other parameters are set for worst-case conditions, and then changed to save power when it is discovered that the conditions are better-than-worst case. Alternately, the bias currents and other parameters may be set for maximum power savings, or an intermediate point, and the power can be adjusted from there.

FIG. 9A illustrates a block diagram including an optional gain element 910 and function block 920. Again, an input signal is received on line 912 by optional gain element 910 which in turn drives function block 920. The function block provides an output VOUT on line 922, and receives impedance and bias control signals on lines 924 and 926.

FIG. 9B shows the spectrum for what may be considered a best-case received signal. Specifically, the desired signal 936 is strong, while the interfering signals 937 and 938 are relatively weak. This may be determined, for example, by detecting a large signal level at the input line VIN 812 and a large signal level after a filter, since these readings would indicate that a large signal is received, but that it is at the desired signal frequency.

The maximum signaling capability 931 and noise floor 933 are shown as being set for the worst case conditions. In this case, the noise floor 933 is lower than the maximum allowed for proper signal reception. Accordingly, one or more impedance in the function block 920 may be increased, such that the noise floor 943 rises as shown in FIG. 9C. In this way one or more the driving currents in the function block 920 may be reduced. Similarly, since the drive current is reduced, one or more bias current may also be reduced, depending on the exact circuit configuration.

FIG. 10A illustrates a block diagram showing an optional gain element 1010 driving a function block 1020. An input signal is received by the gain element 1010 on line 1012, and

an output is provided by function block 1020 on line VOUT 1022. One or more gain control signals present on lines 1014 control the gain of gain control element 1010, while one or more impedance and bias control signals are received by the function block 1020 on line to 1024 and 1026.

FIG. 10B illustrates a received signal that may be received on line VIN 1012. In this example, the desired signal 1036 and interferers 1037 and 1038 are each relatively large. This may be determined, for example, by detecting a large signal level at the input line VIN 812 and a smaller signal level after a filter, since these readings would indicate that a large signal is received, but that interferers are being reduced.

As before, in this example, the noise floor 1033 and maximum signal handling capability 1031 are initially set for the worst case conditions. Since the desired signal is relatively large in this case, the noise floor may be allowed to rise, as shown by noise floor 1043 in FIG. 10C. Since the desired signal 1046 and interferers 1047 are large, the maximum signal handling capability Smax 1041 remains constant. Again, the noise floor is increased by increasing impedances in the function block 1020. This reduces the required drive current, and may also allow for a reduction in bias currents.

FIG. 11A illustrates a block diagram including an optional gain element 1110 and function block 1120 in accordance with an embodiment of the present convention. An input signal is received on line 1112 by the optional gain control element 1110, while an output signal is provided by the function block 1120 on line VOUT 1122. Gain, impedance, and bias control signals are received on lines 1114, 1124, and 1126.

FIG. 11B is an exemplary input signal that may be received by the gain control element 1110 on line VIN 1112. In this specific example, the desired signal 1136 is relatively low or weak while the interfering signals 1137 and 1138 are large. This may be determined, for example, by detecting a large signal level at the input line VIN 812 and a much smaller signal level after a filter, since these readings would indicate that a large signal is received and that large interferers are being reduced such that the resulting signal, the desired signal, is relatively weak.

Again, the maximum signal handling capability 1131 and noise floor 1133 are initially set for worst case conditions. If the desired signal is sufficiently low, while the interferers are sufficiently high, power savings may not be achievable over the worst case settings, since this is in fact the worst case condition. But, if the desired signal is somewhat larger than the worst case condition, then power may be saved in at least two different ways.

For example, FIG. 11C shows the maximum signal handling capability 1141 being lowered. In this case, the interfering signals 1147 in 1148 began to clip and distort, thereby creating intermodulation products 1145, which distort the desired signal 1146. So long as care is taken to not corrupt the desired signal 1146 beyond an acceptable limit, typically measured by a bit-error rate, power may be reduced in this way.

Similarly, in FIG. 11D, the noise floor 1153 is raised somewhat, thereby saving power. Again, this may be done so long as the noise floor is not sufficiently high that the system bit-error rate becomes unacceptable.

FIG. 12 is a summary of the above four examples. The received signal strengths are shown in column 1210, while appropriate power saving responses are listed in column 1220. Specifically, in row 1230, the desired signal and interferer signal strengths are both weak or small. In this case, proper responses include decreasing Smax, or increas-

ing one or more circuit impedances while increasing the circuit gain. Depending on the exact circuit configuration, one of these options may be preferred over the other. Alternately, they may be done in combination, or done in combination with other power saving techniques. Also, in some specific embodiments, when both desired signal and interferer signal strengths are small, the gain may need to be increased while the impedance is maintained or not increased in order to keep the noise floor low.

In row **1240**, the desired signal strength is strong or large, while the interfering signals are small. In this case, an appropriate response is to increase one or more of the circuit impedances. Again, depending on the exact circuit in question, one or more of the bias currents may also be reduced.

In row **1250**, both the desired signals and interfering signal strengths are large. Again, in this case an appropriate response is to increase one or more of the circuit impedances.

In row **1260**, the received desired signal strength is weak or small, while the interfering signals are large. Since this is the worst case situation for which the circuit is designed, substantial power savings are difficult to achieve. However, again, if the received signal is above a minimum level necessary for proper operation, some distortion of the interferers or raising of the noise floor may be acceptable.

It should be noted that not all possible signal conditions are listed here. For example, either the signal or interferer may be of a relatively medium strength, or the interferer may be absent. Also, these terms are for exemplary purposes and are not meant to convey specific signal conditions, but rather are only qualitative. The proper response to a specific condition depends on the embodiment of the present invention, the particular circuit topology, the requirements of the signaling standard used, as well as other constraints.

FIG. **13** is an example shown how power may be saved as a function of time by employing one or more of these methods consistent with embodiments of the present invention. Power is plotted along a Y-axis **1304** as a function of time along X-axis **1302**. Conventional worst case design would fix power dissipation at line **1310**. As can be seen, dynamic power dissipation **1320** under the control of variable gains, impedances, biasing, or combination thereof, allows for a lower average power **1330** as compared to the power dissipated **1310** by the conventional design.

FIG. **14** is a block diagram of a portion of a receiver consistent with an embodiment of the present invention. Included are low-noise amplifier **1410**, mixer **1420**, gain stage **1430**, filter **1440**, AGC amplifier **1450**, and VCO **1460**. Signal strength detection is done at the output of the low-noise amplifier by signal strength indicator **1470**, at the output of the mixer by signal strength indicator **1472**, and at the output of the filter by signal strength indicator **1474**. The outputs of the signal strength indicator circuits are received by the computational circuit **1470**, which in turn controls gain and power control circuits **1480** and **1485**. Power and gain control circuits **1480** and **1485** control the gain, biasing, and impedance levels of the circuits in the receiver signal path. Also, the gain and power control circuits may control the same parameters in the VCO **1460**. This figure is greatly simplified for purposes of explanation. For example, the quadrature nature of the mixers and following circuits are not shown. Also, power-down and start-up circuits are not included.

The current level in the low-noise amplifier determines a multitude of parameters including voltage gain, linearity, input impedance matching, and noise figure. When condi-

tions are better than worst-case, some of these parameters may be relaxed while maintaining an acceptable bit-error rate, thus saving power.

The bias current in the mixers effect that block's noise figure and linearity. Care is taken in reducing power in this block so as not to increase nonlinearities, particularly the third-order nonlinearity as measured by IP3, the third-order intercept point, beyond an acceptable limit.

A key parameter of the VCO is phase noise, an increase in which increases the sidebands on either side of the oscillation signal. During transmission, the phase noise should be kept low to avoid interference with adjacent channels and for preserving modulation information.

During reception however, if the conditions are better than worst case, the phase noise requirement for the VCO is relaxed, and power can be saved consistent with embodiments of the present invention. The achievable phase noise power spectral density is approximately inversely proportional to the bias current used. Thus, when low phase noise is not required during reception, bias current in the VCO can be reduced.

Most of the power savings in a transceiver in accordance with embodiments of the present invention is achieved in the receiver portion. Additional power may be saved in the transmitter section.

FIG. **15** is a block diagram of a transmitter portion consistent with an embodiment of the present invention. Included is a signal path formed by gain stage **1510** and power amplifier **1520**. The output power level is sensed by output level sensing circuit **1550**, which in turn adjusts the biasing of the power amplifier **1520** through the power control circuit **1540**. Additionally, a transmitter level control signal is received by power control circuits **1530** and **1540**, which in turn control the biasing of gain stage **1510** and power amplifier **1520**. Gain control circuit **1560** also adjusts the gain of gain stage **1510** and power amplifier **1520**. Additional circuitry that varies impedances in each of these circuits may also be included.

Since the gain, impedance and biasing of these blocks are being dynamically varied, care must be taken to not negatively affect the signal being processed. For example, specific embodiments of the present invention perform some or all of these variations during preamble. Also, as changes occur, the circuits in some embodiments are limited such that they may only adapt to an improvement in conditions after frames are completed. If conditions worsen, the circuits may be allowed to change in order to save the data. Alternately, a system may be manually calibrated, for example at set up, and when the network configuration is changed.

The above description of specific embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form described, and many modifications and variations are possible in light of the teaching above. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated.

What is claimed is:

1. A method of reducing the power consumption of a receiver of a battery operated transceiver having a plurality of circuits, wherein the plurality of circuits comprise a receiver signal path comprising at least an amplifier, a mixer and a filter, wherein the plurality of circuits are designed to

13

function between a worst-case operating condition and a best case operating condition, wherein the worst-case operating condition is when a desired signal strength is low and an interferer signal strength is high and the receiver operates with a maximum power dissipation and the best-case operating condition is when the desired signal strength is high and the interferer signal strength is low and the receiver operates with a minimum power dissipation, the method comprising:

receiving a signal comprising a desired signal and an interferer signal;
determining a strength of the desired signal;
determining a strength of the interferer signal;
comparing the strength of the desired signal to the strength of the interferer signal; and
dynamically adjusting at least one of an impedance, a bias or a gain of at least one of the amplifier, filter or mixer in the receiver signal path, responsive to the comparing.

2. The method of claim 1, wherein when the strength of the interferer signal decreases over time, and the strength of the desired signal is low, dynamically decreasing the bias of at least one of the plurality of circuits in the receiver signal path.

3. The method of claim 1, wherein when the strength of the interferer signal is low, and the strength of the desired signal decreases over time, dynamically increasing a gain of at least one of a plurality of circuits in the receiver signal path and dynamically increasing the impedance of at least one of the plurality of circuits in the receiver signal path.

4. The method of claim 1 wherein when the strength of the interferer signal is low and the strength of the desired signal increases over time, dynamically increasing the impedance of one or more of the plurality of circuits in the receiver signal path.

5. The method of claim 1, wherein when the interferer signal is weak and the desired signal is low and the strength of the desired signal increases over time, dynamically decreasing the bias of one or more of the plurality of circuits in the receiver signal path.

6. A method for reducing power consumption in a receiver in a battery operated mobile device, wherein the receiver comprises a plurality of circuits, and wherein the plurality of circuits comprise a signal path including at least an amplifier, a mixer and a filter, the method comprising:

receiving a wireless signal comprising a desired signal and an interferer signal at the receiver;
determining a strength of the desired signal;
determining a strength of the interferer signal;
comparing the strength of the desired signal to the strength of the interferer signal; and
when the strength of the interferer signal is low and the relative strength of the desired signal is greater than the strength of the interferer signal, dynamically increasing an impedance of at least one of the amplifier, filter or mixer in the signal path of the receiver, thereby reducing power dissipation in the receiver.

7. A method for power dissipation control in a receiver of a wireless transceiver of a battery-powered portable wireless device, the receiver having a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, wherein the receiver is configured to receive a wireless signal having a desired signal and an interferer signal, wherein the plurality of circuits are designed to function between a worst-case condition when a strength of the desired signal is low and a strength of the interferer signal is high, and a best-case condition when the strength

14

of the desired signal is high and the strength of the interferer signal is low, the method comprising:

receiving the wireless signal having the desired signal and the interferer signal by the receiver;
determining the strength of the desired signal;
determining the strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal; and
based on the comparison, when the plurality of circuits are functioning at better than the worst-case condition, dynamically adjusting one or more of an impedance, a bias or a gain of one or more of the plurality of circuits in the signal path, thereby controlling power dissipation.

8. The method of claim 7, wherein when the strength of the interferer signal is low and the relative strength of the desired signal with respect to the interferer signal increases, dynamically increasing the impedance of one or more of the plurality of circuits in the signal path to reduce the power dissipation and thereby save power.

9. The method of claim 7, wherein when the strength of the desired signal is low but the relative strength of the desired signal with respect to the interferer signal is better than the worst-case condition and the interferer signal reduces in strength, dynamically reducing the bias of one or more of the plurality of circuits in the signal path, thereby reducing power dissipation and saving power.

10. The method of claim 9, wherein reducing power dissipation reduces a power drain from a battery in the battery-powered portable wireless device.

11. A method for power dissipation reduction in a receiver of a wireless transceiver of a battery powered portable wireless device, the receiver having a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, the plurality of circuits designed to function under at least a worst case condition when a strength of a received desired signal is low and a strength of a received interferer signal is high, the method comprising:

receiving a wireless signal having a desired signal and an interferer signal by the receiver;
determining a strength of the desired signal;
determining a strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal;
based on the comparing, determining a functioning condition of the plurality of circuits; and
when the plurality of circuits are determined to function at a better than the worst case condition in which the strength of the interferer signal is low and the strength of the desired signal is low, causing a bias current of one or more of the plurality of circuits in the receiver signal path of the wireless transceiver to be dynamically decreased relative to the worst-case condition, thereby saving power.

12. A method for power dissipation reduction in a receiver of a wireless transceiver of a battery powered portable wireless device, the receiver configured to function under at least a worst case condition when a received desired signal strength is low and a received interferer signal strength is high, the receiver having a signal path comprising at least an amplifier, a filter, and a mixer, the method comprising:

receiving a wireless signal having a desired signal and an interferer signal by the receiver;
determining a strength of the desired signal;
determining a strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal;

15

based on the comparing, determining a functioning condition of the plurality of circuits; and
when the plurality of circuits are determined to function at a better than the worst case condition in which the strength of the interferer signal is low and the strength of the desired signal is high, causing an impedance of one or more of amplifier, filter or the mixer in the receiver signal path of the wireless transceiver to be increased relative to the worst-case condition, thereby saving power.

13. A method for power dissipation control in a receiver of a wireless transceiver of a battery powered portable wireless device, the receiver having a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, the method comprising:
receiving a wireless signal having a desired signal and an interferer signal by the receiver;
determining the strength of the desired signal;
determining the strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal; and
when the interferer signal is high and the desired signal is low, causing a bias current of one or more of the plurality of circuits in the receiver signal path of the wireless transceiver to be dynamically increased, controlling the power dissipation of the receiver.

14. A method for power dissipation reduction in a receiver of a wireless transceiver of a battery powered portable wireless device based on its operating signal conditions, wherein the receiver has a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, the plurality of circuits designed to function under operating signal conditions that vary based on relative signal strengths of an interferer signal and a desired signal, wherein the operating signal conditions vary between a worst-case operating condition and a best-case operating condition, wherein the worst-case operating condition occurs when a desired signal strength is low and an interferer signal is high and the receiver operates with a maximum power dissipation, wherein the best-case operating condition occurs when the desired signal is high and the interferer signal strength is low and the receiver operates with a minimum power dissipation, the method comprising:

receiving a wireless signal having a desired signal and an interferer signal by the receiver;
determining the strength of the desired signal;
determining the strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal strength;
based on the comparing, when the plurality of circuits are determined to be functioning at better than the worst-case operating signal condition, dynamically adjusting at least one of an impedance, a bias current or a gain of one or more of the amplifier, filter or mixer in the signal path of the receiver, thereby reducing power consumption to save power.

15. The method of claim 14, wherein when the desired signal strength is low and the receiver is operating at better than the worst-case operating signal condition by having the interferer strength lower than that in the worst case operating signal condition, dynamically reducing the bias of one or more of the plurality of circuits in the signal path of the receiver, thereby reducing power dissipation and saving power; and

wherein when the interferer signal strength is high and the receiver is operating at better than the worst-case operating signal condition by having the desired signal

16

higher than that in the worst case operating signal condition, dynamically increasing the impedance of one or more of the plurality of circuits in the signal path of the receiver, thereby reducing power dissipation and saving power.

16. A method for power dissipation optimization in a receiver of a wireless transceiver of a battery powered portable wireless device, the receiver having a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, wherein the plurality of circuits are designed to function between a worst-case operating condition and a best case operating condition, wherein the worst-case operating condition is when a desired signal strength is low and an interferer signal strength is high and the receiver operates with a maximum power dissipation and the best-case operating condition is when the desired signal strength is high and the interferer signal strength is low and the receiver operates with a minimum power dissipation, the method comprising:

receiving a wireless signal having a desired signal and an interferer signal by the receiver;
determining a strength of the desired signal;
determining a strength of the interferer signal;
comparing the strength of the desired signal relative to the strength of the interferer signal; and

based on the comparing, when the plurality of circuits are determined to be functioning at better than the worst-case operating condition, dynamically adjusting at least one of an impedance, a bias current or a gain of one or more of the amplifier, filter or mixer in the signal path of the receiver to optimize power dissipation and save power.

17. The method of claim 16, wherein when the desired signal strength is low and the operating signal condition of the receiver is better than the worst-case operating signal condition and the interferer signal strength is increasing, dynamically increasing a bias current of at least one of the plurality of circuits in the receiver signal path of the wireless transceiver, optimizing the power dissipation;

wherein when the desired signal strength is low and the operating signal condition of the receiver is better than the worst-case operating condition and the interferer signal strength reduces over time, dynamically decreasing a bias current of at least one of the plurality of circuits in the receiver signal path of the wireless transceiver, optimizing the power dissipation, and wherein optimizing the power dissipation under better than the worst-case operating signal condition saves power with respect to the maximum power dissipation of the worst-case operating signal condition.

18. A method for controlling power dissipation in a receiver of a wireless transceiver of a battery powered portable wireless device, the receiver having a signal path comprising a plurality of circuits including at least an amplifier, a filter, and a mixer, wherein the plurality of circuits are designed to function between a worst-case operating condition and a best case operating condition, wherein the worst-case operating condition is when a desired signal strength is low and an interferer signal strength is high and the receiver operates with a maximum power dissipation and the best-case operating condition is when the desired signal strength is high and the interferer signal strength is low and the receiver operates with a minimum power dissipation, the method comprising:

receiving a wireless signal having a desired signal strength and an interferer signal by the receiver;
determining a strength of the desired signal;

17

determining a strength of the interferer signal;
 comparing the strength of the desired signal relative to the
 strength of the interferer signal; and
 wherein when the strength of the interferer signal is low
 and when the strength of the received desired signal is
 higher than the desired signal of the worst-case oper-
 ating signal condition, dynamically adjusting an imped-
 ance of at least one of the plurality of circuits in the
 signal path to reduce power dissipation.

19. A method of power dissipation optimization in a
 receiver of a wireless transceiver of a wireless communica-
 tion device based on its operating signal conditions, wherein
 the transceiver has a signal path comprising a plurality of
 circuits designed to function under operating signal condi-
 tions that vary based on relative signal strengths of an
 interferer signal and a desired signal in a received wireless
 signal, wherein operating conditions vary between a worst-
 case operating signal condition, wherein the receiver oper-
 ates with a maximum power dissipation when a desired
 signal strength is low and an interferer signal strength is high
 and a best-case operating signal condition, wherein the
 receiver operates with minimum power dissipation when the
 desired signal strength is high and the interferer signal
 strength is low, the method comprising:

receiving the wireless signal having the desired signal and
 the interferer signal by the receiver;
 determining the desired signal strength;
 determining the interferer signal strength;
 comparing the desired signal strength to the interferer
 signal strength to determine an operating signal condi-
 tion of the receiver;
 based on the comparing, when the receiver operating
 signal condition is better than the worst case operating
 signal condition, dynamically adjusting one or more of
 an impedance, a bias, or a gain of one or more of the
 plurality of circuits in the receiver signal path, thereby
 optimizing power consumption to save power.

20. The method of claim 19, wherein power saving occurs
 when the desired signal strength is low and the operating
 signal condition is better than the worst-case operating
 signal condition, by dynamically reducing the bias current of
 one or more of the plurality of circuits in the signal path of
 the receiver, thereby reducing power dissipation.

18

21. The method of claim 20, wherein power saving occurs
 when the operating signal condition improves when the
 strength of the interferer signal decreases over time, and the
 bias current is reduced by dynamically adjusting the bias
 current of one or more of the plurality of circuits in the signal
 path of the receiver.

22. A method of power dissipation optimization in a
 receiver of a wireless transceiver of a wireless communica-
 tion device based on its operating signal conditions, wherein
 the transceiver has a signal path comprising a plurality of
 circuits designed to function under operating signal condi-
 tions that vary based on relative signal strengths of an
 interferer signal and a desired signal in a received wireless
 signal received, wherein the operating signal conditions vary
 between a worst-case operating signal condition and a
 best-case operating signal condition, wherein in the worst-
 case operating signal condition the receiver operates with a
 maximum power dissipation when a desired signal strength
 is low and an interferer signal strength is high, and wherein
 in the best-case operating signal condition the receiver
 operates with minimum power dissipation when the desired
 signal strength is high and the interferer signal strength is
 low, the method comprising:

receiving the wireless signal having the desired signal and
 the interferer signal by the receiver;
 determining the desired signal strength;
 determining the interferer signal strength;
 comparing the desired signal strength to the interferer
 signal strength;
 determining an operating signal condition of the receiver
 between the best and worst-case operating signal condi-
 tions based on the comparing;
 when the interferer signal strength is high and the oper-
 ating signal condition is better than the worst-case
 operating signal condition, dynamically increasing an
 impedance of one or more of the plurality of circuits in
 the signal path of the receiver, thereby reducing power
 dissipation.

23. The method of claim 22, wherein when the desired
 signal strength increases over time resulting in an improve-
 ment in the operating condition, dynamically adjusting the
 impedance of one or more of the plurality of circuits in the
 signal path of the receiver results in power saving.

* * * * *