



Q25WRGBX

RAINBOW

\$ 349.99

Length

2

4

DISCONTINUED

A new version of this product has been released and is available! Please either checkout the [Rainbow 2](#) or [Double Rainbow](#).

Should you have found yourself here looking for help with an existing Rainbow, please visit our [Rainbow Support Page](#).

All Rainbow Lamps are 1 pixel and equipped with onboard digital interface giving you command of Intensity, Kelvin, Hue & Saturation. Each lamp has a built in Lumen Radio CRMX chip for wireless control. The Rainbow can also be wired to DMX via Cat5 I/O Port.

The lamp is Self Ballasted AC input utilizing Neutrik True1 locking connector as well as locking Barrel connector for DC input.

(Rainbow LEDs are sold as single units. 5 are shown in the photo to illustrate the RGBX Color System.)

Features:

- **X-fade White Light:** Crossfading our Candlelight diode (2000k) and Daylight diode (6000k) mixing a balanced variable color spectrum. With independent 2000-6000° diodes we give a full range of high quality broad spectrum light and allow color saturation without the muddy effects of RGB derived white light. Includes Kelvin presets at 2000° (2800°) 3200° 4000° (5000°) 5600° 6000°
- **RGB:** A rainbow of color at your finger tips. With a full 360° palette for vibrant fully saturated color or mixed with X-fade white light for soft beautiful pastels. Includes color presets for Blue, Cyan, Green, Yellow, Orange, Red, Magenta, Purple.
- **Low Profile Shape:** Easy to hide when space is at a minimum, the slender linear lamps can be mounted tight against a wall or ceiling.
- **Expandable and Scalable:** Stack them in a column to create large LED panels of any size, or end to end for long linear lighting sources. Create geometric patterns and 3D structures or spell out words the options are endless.
- **Control Panel:** No need to pull out your phone or have a Wi-Fi network. The Rainbow comes equipped with an on-board control panel allowing you to set Intensity, CCT, Saturation, Hue, FX and much more.
- **FX:** Onboard effects with adjustable parameters. Including Fire, Police Light, Short Circuit, Paparazzi, Strobe and Rainbow Color Scroll.
- **DMX Port:** With DMX I/O, the Rainbow can be wired for DMX data control and passed through for chaining multiple lamps together.
- **Wireless Control:** Equipped standard with Lumen Radio CRMX wireless transceivers, Rainbow lamps can be controlled remotely via compatible transmitters.
- **Lead / Follow Mode:** Set a master lamp and control all others. Rainbow LED lamps can be set to send or receive commands to and from any other Rainbow making it easy to change the settings of any multi lamp fixture or rig without dialling each lamp.
- **Energy Efficiency:** The Rainbow Lamps vastly outperform traditional Quartz, Halogen and HMI lighting sources in luminous output to power consumption ratio.

1 item \$ 91.00

- **DC Battery option:** Grab a battery, RGB-X Rainbow Lamps can run off of 10-26 VDC via locking 2.1mm x 5.5 barrel connector.

Length and Wattage:

- 2' - 25 watt - Q25R - **Available Now**
- 4' - 50 watt - Q50R - **Out of Stock**

Power Connect & Voltage:

- Self Ballasted AC range 100VAC to 265VAC via Neutrik True1 connect.
- DC range 10VDC to 26VDC via 5.5 x 2.1mm Locking Barrel connect.

Control:

- OLED screen with digital interface
- Wired DMX via Cat5/6
- Wireless DMX Control by Lumen Radio CRMX Wireless
 - Robust Industry Standard
 - Easy Pairing
 - Compatible with W-DMX Transmitters
- Manual Interface
- Lead/Follow Mode for operation from one tube to control multiple tubes

Included with every lamp:

- 1 - Set of Q Boot-R (1 Power End, 1 Control End)
- 1 - 8' True 1 Power Connector Cable
- 1 - Q-Upgrade USB Cable
- 1 - Instruction Card

Documents:

[Rainbow Photometrics](#)

- [View ETL Certificate](#)
- [View CE EMC Certificate](#)
- [View CE LVD Certificate](#)
- [View RoHS Certificate](#)
- [View FCC Testing](#)
- [View PSE Certificate](#)

1 item \$ 91.00



Click for more info

Specifications

	Q25R	Q50R
Model:	Q25WRGBX	Q50WRGBX
Wattage:	Max 25 watts	Max 50 watts
Weight:	1.65 lbs (0.75 kg)	2.53 lbs (1.15 kg)
Dimensions:	23.1 x 1.75 in (587 x 44.5 mm)	47.0 x 1.75 in (1195 x 44.5 mm)
Power Consumption:	120v = 0.22 amp 240v = 0.11 amp 12v = 1.90 amp 24v = 0.95 amp	120v = 0.44 amp 240v = 0.22 amp 12v = 3.80 amp 24v = 1.90 amp

1 item \$ 91.00

CONTROLLING RAINBOWS

1. Manual Mode with OnScreen Controls



2. Wireless Control from Cintenna TX hard line DMX to Lighting Console



3. Wireless Control from Nova FX RDM hard line DMXto Lighting Console



4. Wireless Control from Cintenna TX hard line DMX Cable to DMXit




5. Wireless Control from AKS to Apple iPad/iTouch over WiFi




1 item \$ 91.00


6. Wired Control hard line DMX cable to Lighting Console

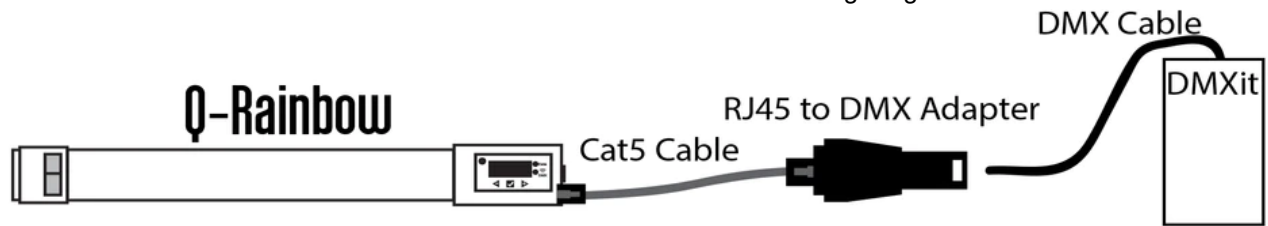

7. Wired Control hard line DMX cable to Lighting Console

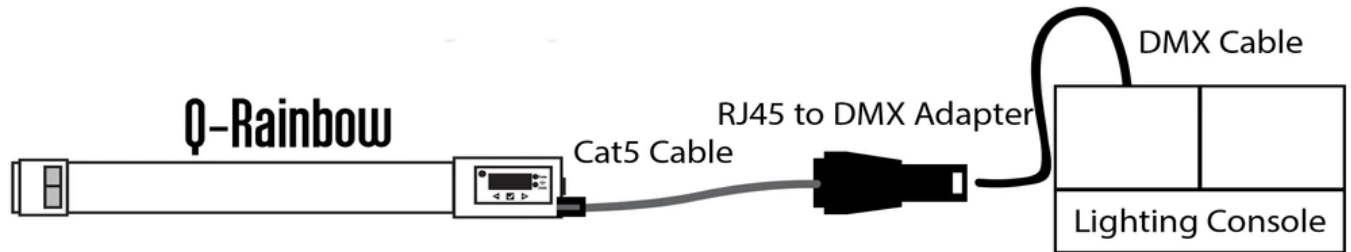

 USD \$ ▾



[About Us](#) [Support](#) [Warranty](#) [Terms & Conditions](#) [Privacy Policy](#) [Subscribe](#)



© 2023 Quasar Science



[Our Brands](#) ▲

1 item \$ 91.00