

(12) **United States Patent**
Sorrells et al.

(10) **Patent No.:** **US 7,496,342 B2**
(45) **Date of Patent:** **Feb. 24, 2009**

(54) **DOWN-CONVERTING ELECTROMAGNETIC SIGNALS, INCLUDING CONTROLLED DISCHARGE OF CAPACITORS**

(58) **Field of Classification Search** 455/313,
455/323, 334, 318; 327/356, 357, 358, 359,
327/360

See application file for complete search history.

(75) Inventors: **David F. Sorrells**, Middleburg, FL (US);
Michael J. Bultman, Jacksonville, FL (US); **Robert W. Cook**, Switzerland, FL (US); **Richard C. Looke**, Jacksonville, FL (US); **Charley D. Moses, Jr.**, DeBary, FL (US); **Gregory S. Rawlins**, Heathrow, FL (US); **Michael W. Rawlins**, Lake Mary, FL (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,057,613 A 10/1936 Gardner

(Continued)

FOREIGN PATENT DOCUMENTS

DE 1936252 1/1971

(Continued)

OTHER PUBLICATIONS

English-language Abstract of Japanese Patent Publication No. JP 58-031622, data supplied by ep.espacenet.com, 1 page (Feb. 24, 1983—Date of publication of application).

(Continued)

Primary Examiner—Sanh D Phu

(74) *Attorney, Agent, or Firm*—Sterne, Kessler, Goldstein & Fox P.L.L.C.

(73) Assignee: **Parkervision, Inc.**, Jacksonville, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 868 days.

(21) Appl. No.: **10/972,133**

(22) Filed: **Oct. 25, 2004**

(65) **Prior Publication Data**

US 2005/0085208 A1 Apr. 21, 2005

Related U.S. Application Data

(60) Division of application No. 09/855,851, filed on May 16, 2001, now Pat. No. 7,010,286, which is a continuation-in-part of application No. 09/550,644, filed on Apr. 14, 2000.

(60) Provisional application No. 60/272,043, filed on Mar. 1, 2001, provisional application No. 60/213,363, filed on Jun. 21, 2000, provisional application No. 60/204,796, filed on May 16, 2000.


(51) **Int. Cl.**
H04B 1/26 (2006.01)

(52) **U.S. Cl.** **455/313; 455/323; 455/334; 455/318; 327/356; 327/357; 327/358; 327/359; 327/360**

(57) **ABSTRACT**

Methods, systems, and apparatuses, for down-converting and up-converting an electromagnetic signal. In embodiments the invention operates by receiving an EM signal and recursively operating on approximate half cycles of the carrier signal. The recursive operations can be performed at a sub-harmonic rate of the carrier signal. The invention accumulates the results of the recursive operations and uses the accumulated results to form a down-converted signal. In embodiments, up-conversion is accomplished by controlling a switch with an oscillating signal, the frequency of the oscillating signal being selected as a sub-harmonic of the desired output frequency. When the invention is being used in the frequency modulation or phase modulation implementations, the oscillating signal is modulated by an information signal before it causes the switch to gate the bias signal. The output of the switch is filtered, and the desired harmonic is output.

23 Claims, 94 Drawing Sheets

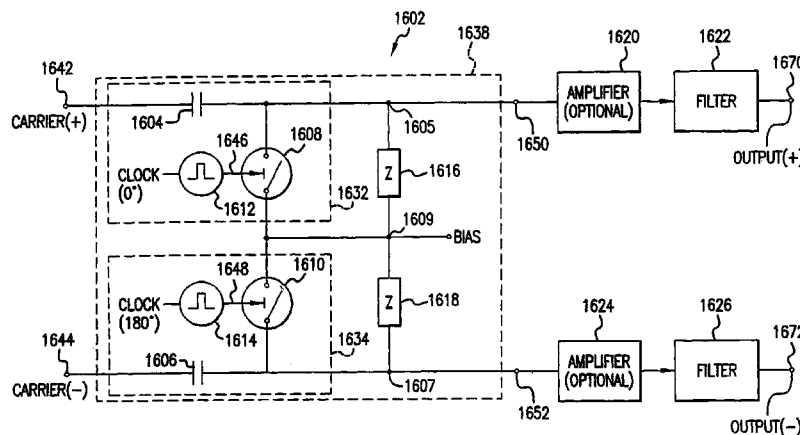

U.S. PATENT DOCUMENTS					
2,241,078	A	5/1941	Vreeland	4,047,121	A 9/1977 Campbell
2,270,385	A	1/1942	Skillman	4,048,598	A 9/1977 Knight
2,283,575	A	5/1942	Roberts	4,051,475	A 9/1977 Campbell
2,358,152	A	9/1944	Earp	4,066,841	A 1/1978 Young
2,410,350	A	10/1946	Labin et al.	4,066,919	A 1/1978 Huntington
2,451,430	A	10/1948	Barone	4,080,573	A 3/1978 Howell
2,462,069	A	2/1949	Chatterjea et al.	4,081,748	A 3/1978 Batz
2,462,181	A	2/1949	Grosselfinger	4,115,737	A 9/1978 Hongu et al.
2,472,798	A	6/1949	Fredendall	4,130,765	A 12/1978 Arakelian et al.
2,497,859	A	2/1950	Boughtwood et al.	4,130,806	A 12/1978 Van Gerwen et al.
2,499,279	A	2/1950	Peterson	4,132,952	A 1/1979 Hongu et al.
2,530,824	A	11/1950	King	4,142,155	A 2/1979 Adachi
2,802,208	A	8/1957	Hobbs	4,143,322	A 3/1979 Shimamura
2,985,875	A	5/1961	Grisdale et al.	4,145,659	A 3/1979 Wolfram
3,023,309	A	2/1962	Foulkes	4,158,149	A 6/1979 Otofujii
3,069,679	A	12/1962	Sweeney et al.	4,170,764	A 10/1979 Salz et al.
3,104,393	A	9/1963	Vogelman	4,204,171	A 5/1980 Sutphin, Jr.
3,114,106	A	12/1963	McManus	4,210,872	A 7/1980 Gregorian
3,118,117	A	1/1964	King et al.	4,220,977	A 9/1980 Yamanaka
3,226,643	A	12/1965	McNair	4,241,451	A 12/1980 Maixner et al.
3,246,084	A	4/1966	Kryter	4,245,355	A 1/1981 Pascoe et al.
3,258,694	A	6/1966	Shepherd	4,250,458	A 2/1981 Richmond et al.
3,383,598	A	5/1968	Sanders	4,253,066	A 2/1981 Fisher et al.
3,384,822	A	5/1968	Miyagi	4,253,067	A 2/1981 Caples et al.
3,454,718	A	7/1969	Perreault	4,253,069	A 2/1981 Nossek
3,523,291	A	8/1970	Pierret	4,286,283	A 8/1981 Clemens
3,548,342	A	12/1970	Maxey	4,308,614	A 12/1981 Fisher et al.
3,555,428	A	1/1971	Perreault	4,313,222	A 1/1982 Katthän
3,614,627	A	10/1971	Runyan et al.	4,320,361	A 3/1982 Kikkert
3,614,630	A	10/1971	Rorden	4,320,536	A 3/1982 Dietrich
3,617,892	A	11/1971	Hawley et al.	4,334,324	A 6/1982 Hoover
3,617,898	A	11/1971	Janning, Jr.	4,346,477	A 8/1982 Gordy
3,621,402	A	11/1971	Gardner	4,355,401	A 10/1982 Ikoma et al.
3,622,885	A	11/1971	Oberdorf et al.	4,356,558	A 10/1982 Owen et al.
3,623,160	A	11/1971	Giles et al.	4,360,867	A 11/1982 Gonda
3,626,417	A	12/1971	Gilbert	4,363,132	A 12/1982 Collin
3,629,696	A	12/1971	Bartelink	4,365,217	A 12/1982 Berger et al.
3,641,442	A	2/1972	Boucher	4,369,522	A 1/1983 Cerny, Jr. et al.
3,643,168	A	2/1972	Manicki	4,370,572	A 1/1983 Cosand et al.
3,662,268	A	5/1972	Gans et al.	4,380,828	A 4/1983 Moon
3,689,841	A	9/1972	Bello et al.	4,384,357	A 5/1983 deBuda et al.
3,694,754	A	9/1972	Baltzer	4,389,579	A 6/1983 Stein
3,702,440	A	11/1972	Moore	4,392,255	A 7/1983 Del Giudice
3,714,577	A	1/1973	Hayes	4,393,395	A 7/1983 Hacke et al.
3,716,730	A	2/1973	Cerny, Jr.	4,430,629	A 2/1984 Betzl et al.
3,717,844	A	2/1973	Barret et al.	4,439,787	A 3/1984 Mogi et al.
3,719,903	A	3/1973	Goodson	4,441,080	A 4/1984 Saari
3,735,048	A	5/1973	Tomsa et al.	4,446,438	A 5/1984 Chang et al.
3,736,513	A	5/1973	Wilson	4,456,990	A 6/1984 Fisher et al.
3,737,778	A	6/1973	Van Gerwen et al.	4,470,145	A 9/1984 Williams
3,739,282	A	6/1973	Bruch et al.	4,472,785	A 9/1984 Kasuga
3,764,921	A	10/1973	Huard	4,479,226	A 10/1984 Prabhu et al.
3,767,984	A	10/1973	Shinoda et al.	4,481,490	A 11/1984 Huntley
3,806,811	A	4/1974	Thompson	4,481,642	A 11/1984 Hanson
3,809,821	A	5/1974	Melvin	4,483,017	A 11/1984 Hampel et al.
3,852,530	A	12/1974	Shen	4,484,143	A 11/1984 French et al.
3,868,601	A	2/1975	MacAfee	4,485,347	A 11/1984 Hirasawa et al.
3,940,697	A	2/1976	Morgan	4,485,488	A 11/1984 Houdart
3,949,300	A	4/1976	Sadler	4,488,119	A 12/1984 Marshall
3,967,202	A	6/1976	Batz	4,504,803	A 3/1985 Lee et al.
3,980,945	A	9/1976	Bickford	4,510,467	A 4/1985 Chang et al.
3,987,280	A	10/1976	Bauer	4,517,519	A 5/1985 Mukaiyama
3,991,277	A	11/1976	Hirata	4,517,520	A 5/1985 Ogawa
4,003,002	A	1/1977	Snijders et al.	4,518,935	A 5/1985 van Roermund
4,013,966	A	3/1977	Campbell	4,521,892	A 6/1985 Vance et al.
4,016,366	A	4/1977	Kurata	4,562,414	A 12/1985 Linder et al.
4,017,798	A	4/1977	Gordy et al.	4,563,773	A 1/1986 Dixon, Jr. et al.
4,019,140	A	4/1977	Swerdlow	4,577,157	A 3/1986 Reed
4,032,847	A	6/1977	Unkauf	4,583,239	A 4/1986 Vance
4,035,732	A	7/1977	Lohrmann	4,591,736	A 5/1986 Hirao et al.
4,045,740	A	8/1977	Baker	4,591,930	A 5/1986 Baumeister
				4,602,220	A 7/1986 Kurihara
				4,603,300	A 7/1986 Welles, II et al.

4,612,464 A	9/1986	Ishikawa et al.	4,931,921 A	6/1990	Anderson
4,612,518 A	9/1986	Gans et al.	4,943,974 A	7/1990	Motamedi
4,616,191 A	10/1986	Galani et al.	4,944,025 A	7/1990	Gehring et al.
4,621,217 A	11/1986	Saxe et al.	4,955,079 A	9/1990	Connerney et al.
4,628,517 A	12/1986	Schwarz et al.	4,965,467 A	10/1990	Bilteerijst
4,633,510 A	12/1986	Suzuki et al.	4,967,160 A	10/1990	Quievy et al.
4,634,998 A	1/1987	Crawford	4,970,703 A	11/1990	Hariharan et al.
4,648,021 A	3/1987	Alberkrack	4,972,436 A	11/1990	Halim et al.
4,651,034 A	3/1987	Sato	4,982,353 A	1/1991	Jacob et al.
4,651,210 A	3/1987	Olson	4,984,077 A	1/1991	Uchida
4,653,117 A	3/1987	Heck	4,995,055 A	2/1991	Weinberger et al.
4,660,164 A	4/1987	Leibowitz	5,003,621 A	3/1991	Gailus
4,663,744 A	5/1987	Russell et al.	5,005,169 A	4/1991	Bronder et al.
4,675,882 A	6/1987	Lillie et al.	5,006,810 A	4/1991	Popescu
4,688,237 A	8/1987	Brault	5,006,854 A	4/1991	White et al.
4,688,253 A	8/1987	Gumm	5,010,585 A	4/1991	Garcia
4,716,376 A	12/1987	Daudelin	5,012,245 A	4/1991	Scott et al.
4,716,388 A	12/1987	Jacobs	5,014,130 A	5/1991	Heister et al.
4,718,113 A	1/1988	Rother et al.	5,014,304 A	5/1991	Nicollini et al.
4,726,041 A	2/1988	Prohaska et al.	5,015,963 A	5/1991	Sutton
4,733,403 A	3/1988	Simone	5,016,242 A	5/1991	Tang
4,734,591 A	3/1988	Ichitsubo	5,017,924 A	5/1991	Guiberteau et al.
4,737,969 A	4/1988	Steel et al.	5,020,149 A	5/1991	Hemmie
4,740,675 A	4/1988	Brosnan et al.	5,020,154 A	5/1991	Zierhut
4,740,792 A	4/1988	Sagey et al.	5,052,050 A	9/1991	Collier et al.
4,743,858 A	5/1988	Everard	5,058,107 A	10/1991	Stone et al.
4,745,463 A	5/1988	Lu	5,062,122 A	10/1991	Pham et al.
4,751,468 A	6/1988	Agoston	5,063,387 A	11/1991	Mower
4,757,538 A	7/1988	Zink	5,065,409 A	11/1991	Hughes et al.
4,761,798 A	8/1988	Griswold, Jr. et al.	5,083,050 A	1/1992	Vasile
4,768,187 A	8/1988	Marshall	5,091,921 A	2/1992	Minami
4,769,612 A	9/1988	Tamakoshi et al.	5,095,533 A	3/1992	Loper et al.
4,771,265 A	9/1988	Okui et al.	5,095,536 A	3/1992	Loper
4,772,853 A	9/1988	Hart	5,111,152 A	5/1992	Makino
4,785,463 A	11/1988	Janc et al.	5,113,094 A	5/1992	Grace et al.
4,789,837 A	12/1988	Ridgers	5,113,129 A	5/1992	Hughes
4,791,584 A	12/1988	Greivenkamp, Jr.	5,115,409 A	5/1992	Stepp
4,801,823 A	1/1989	Yokoyama	5,122,765 A	6/1992	Pataut
4,806,790 A	2/1989	Sone	5,124,592 A	6/1992	Hagino
4,810,904 A	3/1989	Crawford	5,126,682 A	6/1992	Weinberg et al.
4,810,976 A	3/1989	Cowley et al.	5,131,014 A	7/1992	White
4,811,362 A	3/1989	Yester, Jr. et al.	5,136,267 A	8/1992	Cabot
4,811,422 A	3/1989	Kahn	5,140,699 A	8/1992	Kozak
4,814,649 A	3/1989	Young	5,140,705 A	8/1992	Kosuga
4,816,704 A	3/1989	Fiori, Jr.	5,150,124 A	9/1992	Moore et al.
4,819,252 A	4/1989	Christopher	5,151,661 A	9/1992	Caldwell et al.
4,833,445 A	5/1989	Buchele	5,157,687 A	10/1992	Tymes
4,841,265 A	6/1989	Watanabe et al.	5,159,710 A	10/1992	Cusdin
4,845,389 A	7/1989	Pyndiah et al.	5,164,985 A	11/1992	Nysen et al.
4,855,894 A	8/1989	Asahi et al.	5,170,414 A	12/1992	Silvian
4,857,928 A	8/1989	Gailus et al.	5,172,019 A	12/1992	Naylor et al.
4,862,121 A	8/1989	Hochschild et al.	5,172,070 A	12/1992	Hiraiwa et al.
4,866,441 A	9/1989	Conway et al.	5,179,731 A	1/1993	Trankle et al.
4,868,654 A	9/1989	Juri et al.	5,191,459 A	3/1993	Thompson et al.
4,870,659 A	9/1989	Oishi et al.	5,196,806 A	3/1993	Ichihara
4,871,987 A	10/1989	Kawase	5,204,642 A	4/1993	Ashgar et al.
4,873,492 A	10/1989	Myer	5,212,827 A	5/1993	Meszko et al.
4,885,587 A	12/1989	Wiegand et al.	5,214,787 A	5/1993	Karkota, Jr.
4,885,671 A	12/1989	Peil	5,218,562 A	6/1993	Basehore et al.
4,885,756 A	12/1989	Fontanes et al.	5,220,583 A	6/1993	Solomon
4,888,557 A	12/1989	Puckette, IV et al.	5,220,680 A	6/1993	Lee
4,890,302 A	12/1989	Muilwijk	5,222,144 A	6/1993	Whikehart
4,893,316 A	1/1990	Janc et al.	5,230,097 A	7/1993	Currie et al.
4,893,341 A	1/1990	Gehring	5,239,496 A	8/1993	Vancraeynest
4,894,766 A	1/1990	De Agro	5,239,686 A	8/1993	Downey
4,896,152 A	1/1990	Tiemann	5,239,687 A	8/1993	Chen
4,902,979 A	2/1990	Puckette, IV	5,241,561 A	8/1993	Barnard
4,908,579 A	3/1990	Tawfik et al.	5,249,203 A	9/1993	Loper
4,910,752 A	3/1990	Yester, Jr. et al.	5,251,218 A	10/1993	Stone et al.
4,914,405 A	4/1990	Wells	5,251,232 A	10/1993	Nonami
4,920,510 A	4/1990	Senderowicz et al.	5,260,970 A	11/1993	Henry et al.
4,922,452 A	5/1990	Larsen et al.	5,260,973 A	11/1993	Watanabe
4,931,716 A	6/1990	Jovanovic et al.	5,263,194 A	11/1993	Ragan

US 7,496,342 B2

Page 4

5,263,196 A	11/1993	Jasper	5,483,600 A	1/1996	Werrbach
5,263,198 A	11/1993	Geddes et al.	5,483,691 A	1/1996	Heck et al.
5,267,023 A	11/1993	Kawasaki	5,483,695 A	1/1996	Pardoen
5,278,826 A	1/1994	Murphy et al.	5,490,173 A	2/1996	Whikehart et al.
5,282,023 A	1/1994	Scarpa	5,490,176 A	2/1996	Peltier
5,282,222 A	1/1994	Fattouche et al.	5,493,581 A	2/1996	Young et al.
5,287,516 A	2/1994	Schaub	5,493,721 A	2/1996	Reis
5,293,398 A	3/1994	Hamao et al.	5,495,200 A	2/1996	Kwan et al.
5,303,417 A	4/1994	Laws	5,495,202 A	2/1996	Hsu
5,307,517 A	4/1994	Rich	5,495,500 A	2/1996	Jovanovich et al.
5,315,583 A	5/1994	Murphy et al.	5,499,267 A	3/1996	Ohe et al.
5,319,799 A	6/1994	Morita	5,500,758 A	3/1996	Thompson et al.
5,321,852 A	6/1994	Seong	5,512,946 A	4/1996	Murata et al.
5,325,204 A	6/1994	Scarpa	5,513,389 A	4/1996	Reeser et al.
5,337,014 A	8/1994	Najle et al.	5,515,014 A	5/1996	Troutman
5,339,054 A	8/1994	Taguchi	5,517,688 A	5/1996	Fajen et al.
5,339,459 A	8/1994	Schiltz et al.	5,519,890 A	5/1996	Pinckley
5,345,239 A	9/1994	Madni et al.	5,523,719 A	6/1996	Longo et al.
5,353,306 A	10/1994	Yamamoto	5,523,726 A	6/1996	Kroeger et al.
5,355,114 A	10/1994	Sutterlin et al.	5,523,760 A	6/1996	McEwan
5,361,408 A	11/1994	Watanabe et al.	5,535,402 A	7/1996	Leibowitz et al.
5,369,404 A	11/1994	Galton	5,539,770 A	7/1996	Ishigaki
5,369,789 A	11/1994	Kosugi et al.	5,551,076 A	8/1996	Bonn
5,369,800 A	11/1994	Takagi et al.	5,552,789 A	9/1996	Schuermann
5,375,146 A	12/1994	Chalmers	5,555,453 A	9/1996	Kajimoto et al.
5,379,040 A	1/1995	Mizomoto et al.	5,557,641 A	9/1996	Weinberg
5,379,141 A	1/1995	Thompson et al.	5,557,642 A	9/1996	Williams
5,388,063 A	2/1995	Takatori et al.	5,559,809 A	9/1996	Jeon et al.
5,389,839 A	2/1995	Heck	5,563,550 A	10/1996	Toth
5,390,215 A	2/1995	Antia et al.	5,564,097 A	10/1996	Swanke
5,390,364 A	2/1995	Webster et al.	5,574,755 A	11/1996	Persico
5,400,084 A	3/1995	Scarpa	5,579,341 A	11/1996	Smith et al.
5,404,127 A	4/1995	Lee et al.	5,579,347 A	11/1996	Lindquist et al.
5,410,195 A	4/1995	Ichihara	5,584,068 A	12/1996	Mohindra
5,410,270 A	4/1995	Rybicki et al.	5,589,793 A	12/1996	Kassapian
5,410,541 A	4/1995	Hotto	5,592,131 A	1/1997	Labreche et al.
5,410,743 A	4/1995	Seely et al.	5,600,680 A	2/1997	Mishima et al.
5,412,352 A	5/1995	Graham	5,602,847 A	2/1997	Pagano et al.
5,416,449 A	5/1995	Joshi	5,602,868 A	2/1997	Wilson
5,416,803 A	5/1995	Janer	5,604,592 A	2/1997	Kotidis et al.
5,422,909 A	6/1995	Love et al.	5,604,732 A	2/1997	Kim et al.
5,422,913 A	6/1995	Wilkinson	5,606,731 A	2/1997	Pace et al.
5,423,082 A	6/1995	Cygan et al.	5,608,531 A	3/1997	Honda et al.
5,428,638 A	6/1995	Cioffi et al.	5,610,946 A	3/1997	Tanaka et al.
5,428,640 A	6/1995	Townley	RE35,494 E	4/1997	Nicollini
5,434,546 A	7/1995	Palmer	5,617,451 A	4/1997	Mimura et al.
5,438,329 A	8/1995	Gastouniotis et al.	5,619,538 A	4/1997	Sempel et al.
5,438,692 A	8/1995	Mohindra	5,621,455 A	4/1997	Rogers et al.
5,440,311 A	8/1995	Gallagher et al.	5,628,055 A	5/1997	Stein
5,444,415 A	8/1995	Dent et al.	5,630,227 A	5/1997	Bella et al.
5,444,416 A	8/1995	Ishikawa et al.	5,633,610 A	5/1997	Maekawa et al.
5,444,865 A	8/1995	Heck et al.	5,633,815 A	5/1997	Young
5,446,421 A	8/1995	Kechkaylo	5,634,207 A	5/1997	Yamaji et al.
5,446,422 A	8/1995	Mattila et al.	5,636,140 A	6/1997	Lee et al.
5,448,602 A	9/1995	Ohmori et al.	5,638,396 A	6/1997	Klimek
5,451,899 A	9/1995	Lawton	5,640,415 A	6/1997	Pandula
5,454,007 A	9/1995	Dutta	5,640,424 A	6/1997	Banavong et al.
5,454,009 A	9/1995	Fruit et al.	5,640,428 A	6/1997	Abe et al.
5,461,646 A	10/1995	Anvari	5,640,698 A	6/1997	Shen et al.
5,463,356 A	10/1995	Palmer	5,642,071 A	6/1997	Sevenhans et al.
5,463,357 A	10/1995	Hobden	5,648,985 A	7/1997	Bjerede et al.
5,465,071 A	11/1995	Kobayashi et al.	5,650,785 A	7/1997	Rodal
5,465,410 A	11/1995	Hiben et al.	5,659,372 A	8/1997	Patel et al.
5,465,415 A	11/1995	Bien	5,661,424 A	8/1997	Tang
5,465,418 A	11/1995	Zhou et al.	5,663,878 A	9/1997	Walker
5,471,162 A	11/1995	McEwan	5,663,986 A	9/1997	Striffler
5,471,665 A	11/1995	Pace et al.	5,668,836 A	9/1997	Smith et al.
5,479,120 A	12/1995	McEwan	5,675,392 A	10/1997	Nayebi et al.
5,479,447 A	12/1995	Chow et al.	5,678,220 A	10/1997	Fournier
5,481,570 A	1/1996	Winters	5,678,226 A	10/1997	Li et al.
5,483,193 A	1/1996	Kennedy et al.	5,680,078 A	10/1997	Ariie
5,483,245 A	1/1996	Ruinet	5,680,418 A	10/1997	Croft et al.
5,483,549 A	1/1996	Weinberg et al.	5,682,099 A	10/1997	Thompson et al.

US 7,496,342 B2

Page 5

5,689,413	A	11/1997	Jaramillo et al.	5,892,380	A	4/1999	Quist
5,694,096	A	12/1997	Ushiroku et al.	5,894,239	A	4/1999	Bonaccio et al.
5,697,074	A	12/1997	Makikallio et al.	5,894,496	A	4/1999	Jones
5,699,006	A	12/1997	Zelev et al.	5,896,304	A	4/1999	Tiemann et al.
5,703,584	A	12/1997	Hill	5,896,347	A	4/1999	Tomita et al.
5,705,949	A	1/1998	Alelyunas et al.	5,896,562	A	4/1999	Heinonen
5,705,955	A	1/1998	Freeburg et al.	5,898,912	A	4/1999	Heck et al.
5,710,992	A	1/1998	Sawada et al.	5,900,746	A	5/1999	Sheahan
5,710,998	A	1/1998	Opas	5,900,747	A	5/1999	Brauns
5,714,910	A	2/1998	Skoczen et al.	5,901,054	A	5/1999	Leu et al.
5,715,281	A	2/1998	Bly et al.	5,901,187	A	5/1999	Iinuma
5,721,514	A	2/1998	Crockett et al.	5,901,344	A	5/1999	Opas
5,724,002	A	3/1998	Hulick	5,901,347	A	5/1999	Chambers et al.
5,724,041	A	3/1998	Inoue et al.	5,901,348	A	5/1999	Bang et al.
5,724,653	A	3/1998	Baker et al.	5,901,349	A	5/1999	Guegnard et al.
5,729,577	A	3/1998	Chen	5,903,178	A	5/1999	Miyatsuji et al.
5,729,829	A	3/1998	Talwar et al.	5,903,187	A	5/1999	Claverie et al.
5,732,333	A	3/1998	Cox et al.	5,903,196	A	5/1999	Salvi et al.
5,734,683	A	3/1998	Hulkko et al.	5,903,421	A	5/1999	Furutani et al.
5,736,895	A	4/1998	Yu et al.	5,903,553	A	5/1999	Sakamoto et al.
5,737,035	A	4/1998	Rotzoll	5,903,595	A	5/1999	Suzuki
5,742,189	A	4/1998	Yoshida et al.	5,903,609	A	5/1999	Kool et al.
5,745,846	A	4/1998	Myer et al.	5,903,827	A	5/1999	Kennan et al.
5,748,683	A	5/1998	Smith et al.	5,903,854	A	5/1999	Abe et al.
5,751,154	A	5/1998	Tsugai	5,905,433	A	5/1999	Wortham
5,757,858	A	5/1998	Black et al.	5,905,449	A	5/1999	Tsubouchi et al.
5,757,870	A	5/1998	Miya et al.	5,907,149	A	5/1999	Marckini
RE35,829	E	6/1998	Sanderford, Jr.	5,907,197	A	5/1999	Faulk
5,760,629	A	6/1998	Urabe et al.	5,909,447	A	6/1999	Cox et al.
5,760,632	A	6/1998	Kawakami et al.	5,911,116	A	6/1999	Nosswitz
5,760,645	A	6/1998	Comte et al.	5,911,123	A	6/1999	Shaffer et al.
5,764,087	A	6/1998	Clark	5,914,622	A	6/1999	Inoue
5,767,726	A	6/1998	Wang	5,915,278	A	6/1999	Mallick
5,768,118	A	6/1998	Faulk et al.	5,918,167	A	6/1999	Tiller et al.
5,768,323	A	6/1998	Kroeger et al.	5,920,199	A	7/1999	Sauer
5,770,985	A	6/1998	Ushiroku et al.	5,926,065	A	7/1999	Wakai et al.
5,771,442	A	6/1998	Wang et al.	5,926,513	A	7/1999	Suominen et al.
5,777,692	A	7/1998	Ghosh	5,933,467	A	8/1999	Sehier et al.
5,777,771	A	7/1998	Smith	5,937,013	A	8/1999	Lam et al.
5,778,022	A	7/1998	Walley	5,943,370	A	8/1999	Smith
5,784,689	A	7/1998	Kobayashi	5,945,660	A	8/1999	Nakasui et al.
5,786,844	A	7/1998	Rogers et al.	5,949,827	A	9/1999	DeLuca et al.
5,787,125	A	7/1998	Mittel	5,952,895	A	9/1999	McCune, Jr. et al.
5,790,587	A	8/1998	Smith et al.	5,953,642	A	9/1999	Feldtkeller et al.
5,793,801	A	8/1998	Fertner	5,955,992	A	9/1999	Shattil
5,793,817	A	8/1998	Wilson	5,959,850	A	9/1999	Lim
5,793,818	A	8/1998	Claydon et al.	5,960,033	A	9/1999	Shibano et al.
5,801,654	A	9/1998	Traylor	5,970,053	A	10/1999	Schick et al.
5,802,463	A	9/1998	Zuckerman	5,982,315	A	11/1999	Bazarjani et al.
5,805,460	A	9/1998	Greene et al.	5,982,329	A	11/1999	Pittman et al.
5,809,060	A	9/1998	Cafarella et al.	5,986,600	A	11/1999	McEwan
5,812,546	A	9/1998	Zhou et al.	5,994,689	A	11/1999	Charrier
5,818,582	A	10/1998	Fernandez et al.	5,995,030	A	11/1999	Cabler
5,818,869	A	10/1998	Miya et al.	5,999,561	A	12/1999	Naden et al.
5,825,254	A	10/1998	Lee	6,005,506	A	12/1999	Bazarjani et al.
5,825,257	A	10/1998	Klymyshyn et al.	6,005,903	A	12/1999	Mendelovicz
5,834,979	A	11/1998	Yatsuka	6,011,435	A	1/2000	Takeyabu et al.
5,834,985	A	11/1998	Sundegård	6,014,176	A	1/2000	Nayebi et al.
5,834,987	A	11/1998	Dent	6,014,551	A	1/2000	Pesola et al.
5,841,324	A	11/1998	Williams	6,018,262	A	1/2000	Noro et al.
5,841,811	A	11/1998	Song	6,018,553	A	1/2000	Sanielevici et al.
5,844,449	A	12/1998	Abeno et al.	6,026,286	A	2/2000	Long
5,844,868	A	12/1998	Takahashi et al.	6,028,887	A	2/2000	Harrison et al.
5,847,594	A	12/1998	Mizuno	6,031,217	A	2/2000	Aswell et al.
5,859,878	A	1/1999	Phillips et al.	6,034,566	A	3/2000	Ohe
5,864,754	A	1/1999	Hotto	6,038,265	A	3/2000	Pan et al.
5,870,670	A	2/1999	Ripley et al.	6,041,073	A	3/2000	Davidovici et al.
5,872,446	A	2/1999	Cranford, Jr. et al.	6,047,026	A	4/2000	Chao et al.
5,878,088	A	3/1999	Knutson et al.	6,049,573	A	4/2000	Song
5,881,375	A	3/1999	Bonds	6,049,706	A	4/2000	Cook et al.
5,883,548	A	3/1999	Assard et al.	6,054,889	A	4/2000	Kobayashi
5,884,154	A	3/1999	Sano et al.	6,057,714	A	5/2000	Andrys et al.
5,887,001	A	3/1999	Russell	6,061,551	A	5/2000	Sorrells et al.

6,061,555 A	5/2000	Bultman et al.	6,441,694 B1	8/2002	Turcotte et al.
6,064,054 A	5/2000	Waczynski et al.	6,445,726 B1	9/2002	Gharpurey
6,067,329 A	5/2000	Kato et al.	6,459,721 B1	10/2002	Mochizuki et al.
6,072,996 A	6/2000	Smith	6,509,777 B2	1/2003	Razavi et al.
6,073,001 A	6/2000	Sokoler	6,512,544 B1	1/2003	Merrill et al.
6,076,015 A	6/2000	Hartley et al.	6,512,785 B1	1/2003	Zhou et al.
6,078,630 A	6/2000	Prasanna	6,512,798 B1	1/2003	Akiyama et al.
6,081,691 A	6/2000	Renard et al.	6,516,185 B1	2/2003	MacNally
6,084,465 A	7/2000	Dasgupta	6,531,979 B1	3/2003	Hynes
6,084,922 A	7/2000	Zhou et al.	6,542,722 B1	4/2003	Sorrells et al.
6,085,073 A	7/2000	Palermo et al.	6,560,301 B1	5/2003	Cook et al.
6,088,348 A	7/2000	Bell, III et al.	6,560,451 B1	5/2003	Somayajula
6,091,289 A	7/2000	Song et al.	6,567,483 B1	5/2003	Dent et al.
6,091,939 A	7/2000	Banh	6,580,902 B1	6/2003	Sorrells et al.
6,091,940 A	7/2000	Sorrells et al.	6,591,310 B1	7/2003	Johnson
6,091,941 A	7/2000	Moriyama et al.	6,597,240 B1	7/2003	Walburger et al.
6,094,084 A	7/2000	Abou-Allam et al.	6,600,795 B1	7/2003	Ohta et al.
6,097,762 A	8/2000	Suzuki et al.	6,600,911 B1	7/2003	Morishige et al.
6,098,046 A	8/2000	Cooper et al.	6,608,647 B1	8/2003	King
6,098,886 A	8/2000	Swift et al.	6,611,569 B1	8/2003	Schier et al.
6,112,061 A	8/2000	Rapeli	6,618,579 B1	9/2003	Smith et al.
6,121,819 A *	9/2000	Traylor 327/359	6,625,470 B1	9/2003	Fourtet et al.
6,125,271 A	9/2000	Rowland et al.	6,628,328 B1	9/2003	Yokouchi et al.
6,144,236 A	11/2000	Vice et al.	6,633,194 B2	10/2003	Arnborg et al.
6,144,331 A	11/2000	Jiang	6,634,555 B1	10/2003	Sorrells et al.
6,144,846 A *	11/2000	Durec 455/323	6,639,939 B1	10/2003	Naden et al.
6,147,340 A	11/2000	Levy	6,647,250 B1	11/2003	Bultman et al.
6,147,763 A	11/2000	Steinlechner	6,647,270 B1	11/2003	Himmelstein
6,150,890 A	11/2000	Damgaard et al.	6,686,879 B2	2/2004	Shattil
6,151,354 A	11/2000	Abbey	6,687,493 B1	2/2004	Sorrells et al.
6,160,280 A	12/2000	Bonn et al.	6,690,232 B2	2/2004	Ueno et al.
6,169,733 B1	1/2001	Lee	6,694,128 B1	2/2004	Sorrells et al.
6,175,728 B1	1/2001	Mitama	6,697,603 B1	2/2004	Lovinggood et al.
6,178,319 B1	1/2001	Kashima	6,704,549 B1	3/2004	Sorrells et al.
6,182,011 B1	1/2001	Ward	6,704,558 B1	3/2004	Sorrells et al.
6,198,941 B1	3/2001	Aho et al.	6,741,139 B2	5/2004	Pleasant et al.
6,204,789 B1	3/2001	Nagata	6,741,650 B1	5/2004	Painchaud et al.
6,208,636 B1	3/2001	Tawil et al.	6,775,684 B1	8/2004	Toyoyama et al.
RE37,138 E	4/2001	Dent	6,798,351 B1	9/2004	Sorrells et al.
6,211,718 B1 *	4/2001	Souetinov 327/359	6,801,253 B1	10/2004	Yonemoto et al.
6,212,369 B1	4/2001	Avasara	6,813,320 B1	11/2004	Claxton et al.
6,215,475 B1	4/2001	Meyerson et al.	6,813,485 B2	11/2004	Sorrells et al.
6,215,828 B1	4/2001	Signell et al.	6,823,178 B2	11/2004	Pleasant et al.
6,225,848 B1	5/2001	Tilley et al.	6,836,650 B2	12/2004	Sorrells et al.
6,230,000 B1	5/2001	Tayloe	6,850,742 B2	2/2005	Fayyaz
6,246,695 B1	6/2001	Seazholtz et al.	6,853,690 B1	2/2005	Sorrells et al.
6,259,293 B1	7/2001	Hayase et al.	6,865,399 B2	3/2005	Fujioka et al.
6,266,518 B1	7/2001	Sorrells et al.	6,873,836 B1	3/2005	Sorrells et al.
6,275,542 B1	8/2001	Katayama et al.	6,876,846 B2	4/2005	Tamaki et al.
6,298,065 B1	10/2001	Dombkowski et al.	6,879,817 B1	4/2005	Sorrells et al.
6,307,894 B2	10/2001	Eidson et al.	6,882,194 B2	4/2005	Belot et al.
6,308,058 B1	10/2001	Souetinov et al.	6,892,057 B2	5/2005	Nilsson
6,313,685 B1	11/2001	Rabii	6,892,062 B2	5/2005	Lee et al.
6,313,700 B1	11/2001	Nishijima et al.	6,894,988 B1	5/2005	Zehavi
6,314,279 B1	11/2001	Mohindra	6,909,739 B1	6/2005	Eerola et al.
6,317,589 B1	11/2001	Nash	6,910,015 B2	6/2005	Kawai
6,321,073 B1	11/2001	Luz et al.	6,917,796 B2	7/2005	Setty et al.
6,327,313 B1	12/2001	Traylor et al.	6,920,311 B2	7/2005	Rofougaran et al.
6,330,244 B1	12/2001	Swartz et al.	6,959,178 B2	10/2005	Macedo et al.
6,335,656 B1	1/2002	Goldfarb et al.	6,963,626 B1	11/2005	Shaeffer et al.
6,353,735 B1	3/2002	Sorrells et al.	6,963,734 B2	11/2005	Sorrells et al.
6,363,262 B1	3/2002	McNicol	6,973,476 B1	12/2005	Naden et al.
6,366,622 B1	4/2002	Brown et al.	6,975,848 B2	12/2005	Rawlins et al.
6,370,371 B1	4/2002	Sorrells et al.	6,999,747 B2	2/2006	Su
6,385,439 B1	5/2002	Hellberg	7,006,805 B1	2/2006	Sorrells et al.
6,393,070 B1	5/2002	Reber	7,010,286 B2	3/2006	Sorrells et al.
6,400,963 B1	6/2002	Glöckler et al.	7,010,559 B2	3/2006	Rawlins et al.
6,404,758 B1	6/2002	Wang	7,016,663 B2	3/2006	Sorrells et al.
6,404,823 B1	6/2002	Grange et al.	7,027,786 B1	4/2006	Smith et al.
6,421,534 B1	7/2002	Cook et al.	7,039,372 B1	5/2006	Sorrells et al.
6,437,639 B1	8/2002	Nguyen et al.	7,050,508 B2	5/2006	Sorrells et al.
6,438,366 B1	8/2002	Lindfors et al.	7,054,296 B1	5/2006	Sorrells et al.
6,441,659 B1	8/2002	Demone	7,065,162 B1	6/2006	Sorrells et al.

7,072,390	B1	7/2006	Sorrells et al.	EP	0 423 718	A3	8/1992
7,072,427	B2	7/2006	Rawlins et al.	EP	0 512 748	A2	11/1992
7,072,433	B2	7/2006	Bell	EP	0 529 836	A1	3/1993
7,076,011	B2	7/2006	Cook et al.	EP	0 548 542	A1	6/1993
7,082,171	B1	7/2006	Johnson et al.	EP	0 512 748	A3	7/1993
7,085,335	B2	8/2006	Rawlins et al.	EP	0 560 228	A1	9/1993
7,107,028	B2	9/2006	Sorrells et al.	EP	0 632 288	A2	1/1995
7,110,435	B1	9/2006	Sorrells et al.	EP	0 632 577	A1	1/1995
7,110,444	B1	9/2006	Sorrells et al.	EP	0 643 477	A2	3/1995
7,190,941	B2	3/2007	Sorrells et al.	EP	0 643 477	A3	3/1995
7,193,965	B1	3/2007	Nevo et al.	EP	0 411 840	B1	10/1995
7,194,044	B2	3/2007	Birkett et al.	EP	0 696 854	A1	2/1996
7,194,246	B2	3/2007	Sorrells et al.	EP	0 632 288	A3	7/1996
7,197,081	B2	3/2007	Saito	EP	0 732 803	A1	9/1996
7,209,725	B1	4/2007	Sorrells et al.	EP	0 486 095	B1	2/1997
7,212,581	B2	5/2007	Birkett et al.	EP	0 782 275	A2	7/1997
7,218,899	B2	5/2007	Sorrells et al.	EP	0 785 635	A1	7/1997
7,218,907	B2	5/2007	Sorrells et al.	EP	0 789 449	A2	8/1997
7,224,749	B2	5/2007	Sorrells et al.	EP	0 789 449	A3	8/1997
7,233,969	B2	6/2007	Rawlins et al.	EP	0 795 955	A2	9/1997
7,236,754	B2	6/2007	Sorrells et al.	EP	0 795 955	A3	9/1997
7,245,886	B2	7/2007	Sorrells et al.	EP	0 795 978	A2	9/1997
7,272,164	B2	9/2007	Sorrells et al.	EP	0 817 369	A2	1/1998
7,292,835	B2	11/2007	Sorrells et al.	EP	0 817 369	A3	1/1998
7,295,826	B1	11/2007	Cook et al.	EP	0 837 565	A1	4/1998
7,308,242	B2	12/2007	Sorrells et al.	EP	0 862 274	A1	9/1998
7,321,640	B2	1/2008	Milne et al.	EP	0 874 499	A2	10/1998
7,321,735	B1	1/2008	Smith et al.	EP	0 512 748	B1	11/1998
7,321,751	B2	1/2008	Sorrells et al.	EP	0 877 476	A1	11/1998
7,376,410	B2	5/2008	Sorrells et al.	EP	0 977 351	A1	2/2000
7,379,515	B2	5/2008	Johnson et al.	FR	2 245 130		4/1975
7,379,883	B2	5/2008	Sorrells	FR	2 669 787	A1	5/1992
7,386,292	B2	6/2008	Sorrells et al.	FR	2 743 231	A1	7/1997
7,389,100	B2	6/2008	Sorrells et al.	GB	2 161 344	A	1/1986
2001/0015673	A1	8/2001	Yamashita et al.	GB	2 215 945	A	9/1989
2001/0036818	A1	11/2001	Dobrovolsky	GB	2 324 919	A	11/1998
2002/0021685	A1	2/2002	Sakusabe	JP	47-2314		2/1972
2002/0037706	A1	3/2002	Ichihara	JP	55-66057		5/1980
2002/0042257	A1	4/2002	Sorrells et al.	JP	56-114451		9/1981
2002/0080728	A1	6/2002	Sugar et al.	JP	58-7903		1/1983
2002/0132642	A1	9/2002	Hines et al.	JP	58-031622		2/1983
2002/0163921	A1	11/2002	Ethridge et al.	JP	58-133004		8/1983
2003/0045263	A1	3/2003	Wakayama et al.	JP	59-022438		2/1984
2003/0078011	A1	4/2003	Cheng et al.	JP	59-123318		7/1984
2003/0081781	A1	5/2003	Jensen et al.	JP	59-144249		8/1984
2003/0149579	A1	8/2003	Begemann et al.	JP	60-58705		4/1985
2003/0193364	A1	10/2003	Liu et al.	JP	60-130203		7/1985
2004/0125879	A1	7/2004	Jaussi et al.	JP	61-30821		2/1986
2006/0002491	A1	1/2006	Darabi et al.	JP	61-193521		8/1986
2006/0039449	A1	2/2006	Fontana et al.	JP	61-232706		10/1986
FOREIGN PATENT DOCUMENTS				JP	61-245749		11/1986
				JP	62-12381		1/1987
				JP	62-047214		2/1987
DE	35 41 031	A1	5/1986	JP	63-54002		3/1988
DE	42 37 692	C1	3/1994	JP	63-65587		3/1988
DE	196 27 640	A1	1/1997	JP	63-153691		6/1988
DE	692 21 098	T2	1/1998	JP	63-274214		11/1988
DE	196 48 915	A1	6/1998	JP	64-048557		2/1989
DE	197 35 798	C1	7/1998	JP	2-39632		2/1990
EP	0 035 166	A1	9/1981	JP	2-131629		5/1990
EP	0 087 336	A1	8/1983	JP	2-276351		11/1990
EP	0 099 265	A1	1/1984	JP	4-123614		4/1992
EP	0 087 336	B1	7/1986	JP	4-127601		4/1992
EP	0 254 844	A2	2/1988	JP	4-154227		5/1992
EP	0 276 130	A2	7/1988	JP	5-175730		7/1993
EP	0 276 130	A3	7/1988	JP	5-175734		7/1993
EP	0 193 899	B1	6/1990	JP	5-327356		12/1993
EP	0 380 351	A2	8/1990	JP	6-237276		8/1994
EP	0 380 351	A3	2/1991	JP	6-284038		10/1994
EP	0 411 840	A2	2/1991	JP	7-154344		6/1995
EP	0 423 718	A2	4/1991	JP	7-307620		11/1995
EP	0 411 840	A3	7/1991	JP	8-23359		1/1996
EP	0 486 095	A1	5/1992	JP	8-32556		2/1996

JP	8-139524	5/1996
JP	9-36664	2/1997
JP	9-171399	6/1997
JP	10-41860	2/1998
JP	10-96778	4/1998
JP	10-173563	6/1998
JP	11-98205	4/1999
WO	WO 80/01633 A1	8/1980
WO	WO 91/18445 A1	11/1991
WO	WO 94/05087 A1	3/1994
WO	WO 95/01006 A1	1/1995
WO	WO 96/02977 A1	2/1996
WO	WO 96/08078 A1	3/1996
WO	WO 96/39750 A1	12/1996
WO	WO 97/08839 A2	3/1997
WO	WO 97/08839 A3	3/1997
WO	WO 97/38490 A1	10/1997
WO	WO 98/00953 A1	1/1998
WO	WO 98/24201 A1	6/1998
WO	WO 98/40968 A2	9/1998
WO	WO 98/40968 A3	9/1998
WO	WO 98/53556 A2	11/1998
WO	WO 99/23755 A1	5/1999
WO	WO 00/31659 A1	6/2000

OTHER PUBLICATIONS

English-language Abstract of Japanese Patent Publication No. JP 61-245749, data supplied by ep.espacenet.com, 1 page (Nov. 1, 1986—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 64-048557, data supplied by ep.espacenet.com, 1 page (Feb. 23, 1989—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 59-022438, data supplied by ep.espacenet.com, 1 page (Feb. 4, 1984—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 59-123318, data supplied by ep.espacenet.com, 1 page (Jul. 17, 1984—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 61-193521, data supplied by ep.espacenet.com, 1 page (Aug. 28, 1986—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 62-047214, data supplied by ep.espacenet.com, 1 page (Feb. 28, 1987—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 63-274214, data supplied by ep.espacenet.com, 1 page (Nov. 11, 1988—Date of publication of application).

English-language Computer Translation of Japanese Patent Publication No. JP 10-173563, provided by the JPO, 10 pages (Jun. 26, 1998—Date of publication of application) and cited in U.S. Appl. No. 10/305,299, directed to related subject matter.

What is I/Q Data?, printed Sep. 16, 2006, from <http://zone.nl.com>, 8 pages (Copyright 2003).

Gaudiosi, J., "Retailers will bundle Microsoft's Xbox with games and peripherals," *Video Store Magazine*, vol. 23, Issue 36, p. 8, 2 pages (Sep. 2-8, 2001).

English-language Translation of German Patent Publication No. DT 1936252, translation provided by Transperfect Translations, 12 pages (Jan. 28, 1971—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 62-12381, data supplied by the espacenet, 1 page (Jan. 21, 1987—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 4-154227, data supplied by the espacenet, 1 page (May 27, 1992—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 6-284038, data supplied by the espacenet, 1 page (Oct. 7, 1994—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 10-96778, data supplied by the espacenet, 1 page (Apr. 14, 1998—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 11-98205, data supplied by the espacenet, 1 page (Apr. 9, 1999—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 6-284083, data supplied by the espacenet, 1 page (Oct. 7, 1994—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 61-232706, data supplied by the espacenet, 1 page (Oct. 17, 1986—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 9-171399, data supplied by the espacenet 1 page (Jun. 30, 1997—Date of publication of application).

English-language Abstract of Japanese Patent Publication No. JP 10-41860, data supplied by the espacenet, 1 page (Feb. 13, 1998—Date of publication of application).

Aghvami, H. et al., "Land Mobile Satellites Using the Highly Elliptic Orbits- The UK T-SAT Mobile Payload," *Fourth International Conference on Satellite Systems for Mobile Communications and Navigation*, IEE, pp. 147-153 (Oct. 17-19, 1988).

Akers, N.P. et al., "RF Sampling Gates: a Brief Review," *IEEE Proceedings*, IEE, vol. 133, Part A, No. 1, pp. 45-49 (Jan. 1986).

Al-Ahmad, H.A.M. et al., "Doppler Frequency Correction for a Non-Geostationary Communications Satellite, Techniques for CERS and T-SAT," *Electronics Division Colloquium on Low Noise Oscillators and Synthesizers*, IEE, pp. 4/1-4/5 (Jan. 23, 1986).

Ali, I. et al., "Doppler Characterization for LEO Satellites," *IEEE Transactions on Communications*, IEEE, vol. 46, No. 3, pp. 309-313 (Mar. 1998).

Allan, D.W., "Statistics of Atomic Frequency Standards," *Proceedings Of The IEEE Special Issue on Frequency Stability*, IEEE, pp. 221-230 (Feb. 1966).

Allstot, D.J. et al., "MOS Switched Capacitor Ladder Filters," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-13, No. 6, pp. 806-814 (Dec. 1978).

Allstot, D.J. and Black Jr. W.C., "Technological Design Considerations for Monolithic MOS Switched-Capacitor Filtering Systems," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 967-986 (Aug. 1983).

Alouini, M. et al., "Channel Characterization and Modeling for Ka-Band Very Small Aperture Terminals," *Proceedings Of the IEEE*, IEEE, vol. 85, No. 6, pp. 981-997 (Jun. 1997).

Andreyev, G.A. and Ogarev, S.A., "Phase Distortions of Keyed Millimeter-Wave Signals in the Case of Propagation in a Turbulent Atmosphere," *Telecommunications and Radio Engineering*, Scripta Technica, vol. 43, No. 12, pp. 87-90 (Dec. 1988).

Antonetti, A. et al., "Optoelectronic Sampling in the Picosecond Range," *Optics Communications*, North-Holland Publishing Company, vol. 21, No. 2, pp. 211-214 (May 1977).

Austin, J. et al., "Doppler Correction of the Telecommunication Payload Oscillators in the UK T-SAT," *18th European Microwave Conference*, Microwave Exhibitions and Publishers Ltd., pp. 851-857 (Sep. 12-15, 1988).

Auston, D.H., "Picosecond optoelectronic switching and gating in silicon," *Applied Physics Letters*, American Institute of Physics, vol. 26, No. 3, pp. 101-103 (Feb. 1, 1975).

Baher, H., "Transfer Functions for Switched-Capacitor and Wave Digital Filters," *IEEE Transactions on Circuits and Systems*, IEEE Circuits and Systems Society, vol. CAS-33, No. 11, pp. 1138-1142 (Nov. 1986).

Baines, R., "The DSP Bottleneck," *IEEE Communications Magazine*, IEEE Communications Society, pp. 46-54 (May 1995).

Banjo, O.P. and Vilar, E., "Binary Error Probabilities on Earth-Space Links Subject to Scintillation Fading," *Electronics Letters*, IEE, vol. 21, No. 7, pp. 296-297 (Mar. 28, 1985).

Banjo, O.P. and Vilar, E., "The Dependence of Slant Path Amplitude Scintillations on Various Meteorological Parameters," *Fifth International Conference on Antennas and Propagation (ICAP 87) Part 2: Propagation*, IEE, pp. 277-280 (Mar. 30-Apr. 2, 1987).

Banjo, O.P. and Vilar, E., "Measurement and Modeling of Amplitude Scintillations on Low-Elevation Earth-Space Paths and Impact on Communication Systems," *IEEE Transactions on Communications*, IEEE Communications Society, vol. COM-34, No. 8, pp. 774-780 (Aug. 1986).

- Banjo, O.P. et al., "Tropospheric Amplitude Spectra Due to Absorption and Scattering in Earth-Space Paths," *Fourth International Conference on Antennas and Propagation (ICAP 85)*, IEE, pp. 77-82 (Apr. 16-19, 1985).
- Basili, P. et al., "Case Study of Intense Scintillation Events on the OTS Path," *IEEE Transactions on Antennas and Propagation*, IEEE, vol. 38, No. 1, pp. 107-113 (Jan. 1990).
- Basili, P. et al., "Observation of High C^2 and Turbulent Path Length on OTS Space-Earth Link," *Electronics Letters*, IEE, vol. 24, No. 17, pp. 1114-1116 (Aug. 18, 1988).
- Blakey, J.R. et al., "Measurement of Atmospheric Millimetre-Wave Phase Scintillations in an Absorption Region," *Electronics Letters*, IEE, Vol. 21, No. 11, pp. 486-487 (May 23, 1985).
- Burgueño, A. et al., "Influence of rain gauge integration time on the rain rate statistics used in microwave communications," *Annales des télécommunications*, International Union of Radio Science, pp. 522-527 (Sep./Oct. 1988).
- Burgueño, A. et al., "Long-Term Joint Statistical Analysis of Duration and Intensity of Rainfall Rate with Application to Microwave Communications," *Fifth International Conference on Antennas and Propagation (ICAP 87) Part 2: Propagation*, IEE, pp. 198-201 (Mar. 30-Apr. 2, 1987).
- Burgueño, A. et al., "Long Term Statistics of Precipitation Rate Return Periods in the Context of Microwave Communications," *Sixth International Conference on Antennas and Propagation (ICAP 89) Part 2: Propagation*, IEE, pp. 297-301 (Apr. 4-7, 1989).
- Burgueño, A. et al., "Spectral Analysis of 49 Years of Rainfall Rate and Relation to Fade Dynamics," *IEEE Transactions on Communications*, IEEE Communications Society, vol. 38, No. 9, pp. 1359-1366 (Sep. 1990).
- Catalan, C. and Vilar, E., "Approach for satellite slant path remote sensing," *Electronics Letters*, IEE, vol. 34, No. 12, pp. 1238-1240 (Jun. 11, 1998).
- Chan, P. et al., "A Highly Linear 1-GHz CMOS Downconversion Mixer," *European Solid State Circuits Conference*, IEEE Communication Society, pp. 210-213 (Sep. 22-24, 1993).
- Declaration of Micheal J. Bultman filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 2 pages.
- Declaration of Robert W. Cook filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 2 pages.
- Declaration of Alex Holtz filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 3 pages.
- Declaration of Richard C. Looke filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 2 pages.
- Declaration of Charley D. Moses, Jr. filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 2 pages.
- Declaration of Jeffrey L. Parker and David F. Sorrells, with attachment Exhibit 1, filed in U.S. Appl. No. 09/176,022, which is directed to related subject matter, 130 pages.
- Dewey, R.J. and Collier, C.J., "Multi-Mode Radio Receiver," *Electronics Division Colloquium on Digitally Implemented Radios*, IEE, pp. 3/1-3/5 (Oct. 18, 1985).
- Dialog File 347 (JAPIO) English Language Patent Abstract for JP 2-276351, 1 page (Nov. 13, 1990—Date of publication of application).
- Dialog File 347 (JAPIO) English Language Patent Abstract for JP 2-131629, 1 page (May 21, 1990—Date of publication of application).
- Dialog File 347 (JAPIO) English Language Patent Abstract for JP 2-39632, 1 page (Feb. 8, 1990—Date of publication of application).
- Dialog File 348 (European Patents) English Language Patent Abstract for EP 0 785 635 A1, 3 pages (Dec. 26, 1996—Date of publication of application).
- Dialog File 348 (European Patents) English Language Patent Abstract for EP 35166 A1, 2 pages (Feb. 18, 1981—Date of publication of application).
- "DSO takes sampling rate to 1 Ghz," *Electronic Engineering*, Morgan Grampian Publishers, vol. 59, No. 723, pp. 77 and 79 (Mar. 1987).
- Erdi, G. and Henneuse, P.R., "A Precision FET-Less Sample-and-Hold with High Charge-to-Drop Current Ratio," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-13, No. 6, pp. 864-873 (Dec. 1978).
- Faulkner, N.D. and Vilar, E., "Subharmonic Sampling for the Measurement of Short Term Stability of Microwave Oscillators," *IEEE Transactions on Instrumentation and Measurement*, IEEE, vol. IM-32, No. 1, pp. 208-213 (Mar. 1983).
- Faulkner, N.D. et al., "Sub-Harmonic Sampling for the Accurate Measurement of Frequency Stability of Microwave Oscillators," *CPEM 82 Digest: Conference on Precision Electromagnetic Measurements*, IEEE, pp. M-10 and M-11 (1982).
- Faulkner, N.D. and Vilar, E., "Time Domain Analysis of Frequency Stability Using Non-Zero Dead-Time Counter Techniques," *CPEM 84 Digest Conference on Precision Electromagnetic Measurements*, IEEE, pp. 81-82 (1984).
- Filip, M. and Vilar, E., "Optimum Utilization of the Channel Capacity of a Satellite Link in the Presence of Amplitude Scintillations and Rain Attenuation," *IEEE Transactions on Communications*, IEEE Communications Society, vol. 38, No. 11, pp. 1958-1965 (Nov. 1990).
- Fukahori, K., "A CMOS Narrow-Band Signaling Filter with Q Reduction," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-19, No. 6, pp. 926-932 (Dec. 1984).
- Fukuchi, H. and Otsu, Y., "Available time statistics of rain attenuation on earth-space path," *IEE Proceedings-H: Microwaves, Antennas and Propagation*, IEE, vol. 135, Pt. H, No. 6, pp. 387-390 (Dec. 1988).
- Gibbins, C.J. and Chadha, R., "Millimetre-wave propagation through hydrocarbon flame," *IEE Proceedings*, IEE, vol. 134, Pt. H, No. 2, pp. 169-173 (Apr. 1987).
- Gilchrist, B. et al., "Sampling hikes performance of frequency synthesizers," *Microwaves & RF*, Hayden Publishing, vol. 23, No. 1, pp. 93-94 and 110 (Jan. 1984).
- Gossard, E.E., "Clear weather meteorological effects on propagation at frequencies above 1 Ghz," *Radio Science*, American Geophysical Union, vol. 16, No. 5, pp. 589-608 (Sep.-Oct. 1981).
- Gregorian, R. et al., "Switched-Capacitor Circuit Design," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 941-966 (Aug. 1983).
- Groshong et al., "Undersampling Techniques Simplify Digital Radio," *Electronic Design*, Penton Publishing, pp. 67-68, 70, 73-75 and 78 (May 23, 1991).
- Grove, W.M., "Sampling for Oscilloscopes and Other RF Systems: Dc through X-Band," *IEEE Transactions on Microwave Theory and Techniques*, IEEE, pp. 629-635 (Dec. 1966).
- Haddon, J. et al., "Measurement of Microwave Scintillations on a Satellite Down-Link at X-Band," *Antennas and Propagation*, IEE, pp. 113-117 (1981).
- Haddon, J. and Vilar, E., "Scattering Induced Microwave Scintillations from Clear Air and Rain on Earth Space Paths and the Influence of Antenna Aperture," *IEEE Transactions on Antennas and Propagation*, IEEE, vol. AP-34, No. 5, pp. 646-657 (May 1986).
- Hafidallah, H. et al., "2-4 Ghz MESFET Sampler," *Electronics Letters*, IEE, vol. 24, No. 3, pp. 151-153 (Feb. 4, 1988).
- Herben, M.H.A.J., "Amplitude and Phase Scintillation Measurements on 8-2 km Line-Of-Sight Path at 30 Ghz," *Electronics Letters*, IEE, vol. 18, No. 7, pp. 287-289 (Apr. 1, 1982).
- Hewitt, A. et al., "An 18 Ghz Wideband LOS Multipath Experiment," *International Conference on Measurements for Telecommunication Transmission Systems—MTTS 85*, IEE, pp. 112-116 (Nov. 27-28, 1985).
- Hewitt, A. et al., "An Autoregressive Approach to the Identification of Multipath Ray Parameters from Field Measurements," *IEEE Transactions on Communications*, IEEE Communications Society, vol. 37, No. 11, pp. 1136-1143 (Nov. 1989).
- Hewitt, A. and Vilar, E., "Selective fading on LOS Microwave Links: Classical and Spread-Spectrum Measurement Techniques," *IEEE Transactions on Communications*, IEEE Communications Society, vol. 36, No. 7, pp. 789-796 (Jul. 1988).
- Hospitalier, E., "Instruments for Recording and Observing Rapidly Varying Phenomena," *Science Abstracts*, IEE, vol. VII, pp. 22-23 (1904).
- Howard, I.M. and Swansson, N.S., "Demodulating High Frequency Resonance Signals for Bearing Fault Detection," *The Institution of Engineers Australia Vibration and Noise Conference*, Institution of Engineers, Australia, pp. 115-121 (Sep. 18-20, 1990).

- Hu, X., *A Switched-Current Sample-and-Hold Amplifier for FM Demodulation*, Thesis for Master of Applied Science, Dept. of Electrical and Computer Engineering, University of Toronto, UMI Dissertation Services, pp. 1-64 (1995).
- Hung, H.-L. A. et al., "Characterization of Microwave Integrated Circuits Using An Optical Phase-Locking and Sampling System," *IEEE MTT-S Digest*, IEEE, pp. 507-510 (1991).
- Hurst, P.J., "Shifting the Frequency Response of Switched-Capacitor Filters by Nonuniform Sampling," *IEEE Transactions on Circuits and Systems*, IEEE Circuits and Systems Society, vol. 38, No. 1, pp. 12-19 (Jan. 1991).
- Itakura, T., "Effects of the sampling pulse width on the frequency characteristics of a sample-and-hold circuit," *IEE Proceedings Circuits, Devices and Systems*, IEE, vol. 141, No. 4, pp. 328-336 (Aug. 1994).
- Janssen, J.M.L., "An Experimental 'Stroboscopic' Oscilloscope for Frequencies up to about 50 Mc/s: I. Fundamentals," *Philips Technical Review*, Philips Research Laboratories, vol. 12, No. 2, pp. 52-59 (Aug. 1950).
- Janssen, J.M.L. and Michels, A.J., "An Experimental 'Stroboscopic' Oscilloscope for Frequencies up to about 50 Mc/s: II. Electrical Build-Up," *Philips Technical Review*, Philips Research Laboratories, vol. 12, No. 3, pp. 73-82 (Sep. 1950).
- Jondral, V.F. et al., "Doppler Profiles for Communication Satellites," *Frequenz*, Herausberger, pp. 111-116 (May-Jun. 1996).
- Kaleh, G.K., "A Frequency Diversity Spread Spectrum System for Communication in the Presence of In-band Interference," *1995 IEEE Globecom*, IEEE Communications Society, pp. 66-70 (1995).
- Karasawa, Y. et al., "A New Prediction Method for Tropospheric Scintillation on Earth-Space Paths" *IEEE Transactions on Antennas and Propagation*, IEEE Antennas and Propagation Society, vol. 36, No. 11, pp. 1608-1614 (Nov. 1988).
- Kirsten, J. and Fleming, J., "Undersampling reduces data-acquisition costs for select applications," *EDN*, Cahners Publishing, vol. 35, No. 13, pp. 217-222, 224, 226-228 (Jun. 21, 1990).
- Lam, W.K. et al., "Measurement of the Phase Noise Characteristics of an Unlocked Communications Channel identifier," *Proceedings Of the 1993 IEEE International Frequency Control Symposium*, IEEE, pp. 283-288 (Jun. 2-4, 1993).
- Lam, W.K. et al., "Wideband sounding of 11.6 Ghz transhorizon channel," *Electronics Letters*, IEE, vol. 30, No. 9, pp. 738-739 (Apr. 28, 1994).
- Larkin, K.G., "Efficient demodulator for bandpass sampled AM signals," *Electronics Letters*, vol. 32, No. 2, pp. 101-102 (Jan. 18, 1996).
- Lau, W.H. et al., "Analysis of the Time Variant Structure of Microwave Line-of-sight Multipath Phenomena," *IEEE Global Telecommunications Conference & Exhibition*, IEEE, pp. 1707-1711 (Nov. 28-Dec. 1, 1988).
- Lau, W.H. et al., "Improved Prony Algorithm to Identify Multipath Components," *Electronics Letters*, IEE, vol. 23, No. 20, pp. 1059-1060 (Sep. 24, 1987).
- Lesage, P. and Audoin, C., "Effect of Dead-Time on the Estimation of the Two-Sample Variance," *IEEE Transactions on Instrumentation and Measurement*, IEEE Instrumentation and Measurement Society, vol. IM-28, No. 1, pp. 6-10 (Mar. 1979).
- Liechti, C.A., "Performance of Dual-gate GaAs MESFET's as Gain-Controlled Low-Noise Amplifiers and High-Speed Modulators," *IEEE Transactions on Microwave Theory and Techniques*, IEEE Microwave Theory and Techniques Society, vol. MTT-23, No. 6, pp. 461-469 (Jun. 1975).
- Linnenbrink, T.E. et al., "A One Gigasample Per Second Transient Recorder," *IEEE Transactions on Nuclear Science*, IEEE Nuclear and Plasma Sciences Society, vol. NS-26, No. 4, pp. 4443-4449 (Aug. 1979).
- Liou, M.L., "A Tutorial on Computer-Aided Analysis of Switched-Capacitor Circuits," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 987-1005 (Aug. 1983).
- Lo, P. et al., "Coherent Automatic Gain Control," *IEE Colloquium on Phase Locked Techniques*, IEE, pp. 2/1-2/6 (Mar. 26, 1980).
- Lo, P. et al., "Computation of Rain Induced Scintillations on Satellite Down-Links at Microwave Frequencies," *Third International Conference on Antennas and Propagation (ICAP 83)*, pp. 127-131 (Apr. 12-15, 1983).
- Lo, P.S.L.O. et al., "Observations of Amplitude Scintillations on a Low-Elevation Earth-Space Path," *Electronics Letters*, IEE, vol. 20, No. 7, pp. 307-308 (Mar. 29, 1984).
- Madani, K. and Aithison, C.S., "A 20 Ghz Microwave Sampler," *IEEE Transactions on Microwave Theory and Techniques*, IEEE Microwave Theory and Techniques Society, vol. 40, No. 10, pp. 1960-1963 (Oct. 1992).
- Marsland, R.A. et al., "130 Ghz GaAs monolithic integrated circuit sampling head," *Appl. Phys. Lett.*, American Institute of Physics, vol. 55, No. 6, pp. 592-594 (Aug. 7, 1989).
- Martin, K. and Sedra, A.S., "Switched-Capacitor Building Blocks for Adaptive Systems," *IEEE Transactions on Circuits and Systems*, IEEE Circuits and Systems Society, vol. CAS-28, No. 6, pp. 576-584 (Jun. 1981).
- Marzano, F.S. and d'Auria, G., "Model-based Prediction of Amplitude Scintillation variance due to Clear-Air Tropospheric Turbulence on Earth-Satellite Microwave Links," *IEEE Transactions on Antennas and Propagation*, IEEE Antennas and Propagation Society, vol. 46, No. 10, pp. 1506-1518 (Oct. 1998).
- Matricciani, E., "Prediction of fade durations due to rain in satellite communication systems," *Radio Science*, American Geophysical Union, vol. 32, No. 3, pp. 935-941 (May-Jun. 1997).
- McQueen, J.G., "The Monitoring of High-Speed Waveforms," *Electronic Engineering*, Morgan Brothers Limited, vol. XXIV, No. 296, pp. 436-441 (Oct. 1952).
- Merkelo, J. and Hall, R.D., "Broad-Band Thin-Film Signal Sampler," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-7, No. 1, pp. 50-54 (Feb. 1972).
- Merlo, U. et al., "Amplitude Scintillation Cycles in a Sirio Satellite-Earth Link," *Electronics Letters*, IEE, vol. 21, No. 23, pp. 1094-1096 (Nov. 7, 1985).
- Morris, D., "Radio-holographic reflector measurement of the 30-m millimeter radio telescope at 22 Ghz with a cosmic signal source," *Astronomy and Astrophysics*, Springer-Verlag, vol. 203, No. 2, pp. 399-406 (Sep. (II) 1988).
- Moulsley, T.J. et al., "The efficient acquisition and processing of propagation statistics," *Journal of the Institution of Electronic and Radio Engineers*, IERE, vol. 55, No. 3, pp. 97-103 (Mar. 1985).
- Ndizi, D. et al., "Wide-Band Statistical Characterization of an Over-the-Sea Experimental Transhorizon Link," *IEE Colloquium on Radio Communications at Microwave and Millimetre Wave Frequencies*, IEE, pp. 1/1-1/6 (Dec. 16, 1996).
- Ndizi, D. et al., "Wideband Statistics of Signal Levels and Doppler Spread on an Over-The-Sea Transhorizon Link," *IEE Colloquium on Propagation Characteristics and Related System Techniques for Beyond Line-of-Sight Radio*, IEE, pp. 9/1-9/6 (Nov. 24, 1997).
- "New zero IF chipset from Philips," *Electronic Engineering*, United News & Media, vol. 67, No. 825, p. 10 (Sep. 1995).
- Ohara, H. et al., "First monolithic PCM filter cuts cost of telecomm systems," *Electronic Design*, Hayden Publishing Company, vol. 27, No. 8, pp. 130-135 (April 12, 1979).
- Oppenheim, A.V. et al., *Signals and Systems*, Prentice-Hall, pp. 527-531 and 561-562 (1983).
- Ortgies, G., "Experimental Parameters Affecting Amplitude Scintillation Measurements on Satellite Links," *Electronics Letters*, IEE, vol. 21, No. 17, pp. 771-772 (Aug. 15, 1985).
- Pärssinen et al., "A 2-GHz Subharmonic Sampler for Signal Downconversion," *IEEE Transactions on Microwave Theory and Techniques*, IEEE, vol. 45, No. 12, 7 pages (Dec. 1997).
- Peeters, G. et al., "Evaluation of Statistical Models for Clear-Air Scintillation Prediction Using Olympus Satellite Measurements," *International Journal of Satellite Communications*, John Wiley and Sons, vol. 15, No. 2, pp. 73-88 (Mar.-Apr. 1997).
- Perrey, A.G. and Schoenwetter, H.K., *NBS Technical Note 1121: A Schottky Diode Bridge Sampling Gate*, U.S. Dept. of Commerce, pp. 1-14 (May 1980).
- Poulton, K. et al., "A 1-Ghz 6-bit ADC System," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-22, No. 6, pp. 962-969 (Dec. 1987).
- Press Release, "Parkervision, Inc. Announces Fiscal 1993 Results," Lippert/Heilshorn and Associates, 2 Pages (Apr. 6, 1994).

Press Release, "Parkervision, Inc. Announces the Appointment of Michael Baker to the New Position of National Sales Manager," Lippert/Heilshorn and Associates, 1 Page (Apr. 7, 1994).

Press Release, "Parkervision's Cameraman Well-Received By Distance Learning Market," Lippert/Heilshorn and Associates, 2 Pages (Apr. 8, 1994).

Press Release, "Parkervision, Inc. Announces First Quarter Financial Results," Lippert/Heilshorn and Associates, 2 Pages (Apr. 26, 1994).

Press Release, "Parkervision, Inc. Announces The Retirement of William H. Fletcher, Chief Financial Officer," Lippert/Heilshorn and Associates, 1 Page (May 11, 1994).

Press Release, "Parkervision, Inc. Announces New Cameraman System II™ At Infocomm Trade Show," Lippert/Heilshorn and Associates, 3 Pages (June 9, 1994).

Press Release, "Parkervision, Inc. Announces Appointments to its National Sales Force," Lippert/Heilshorn and Associates, 2 Pages (Jun. 17, 1994).

Press Release, "Parkervision, Inc. Announces Second Quarter and Six Months Financial Results," Lippert/Heilshorn and Associates, 3 Pages (Aug. 9, 1994).

Press Release, "Parkervision, Inc. Announces Third Quarter and Nine Months Financial Results," Lippert/Heilshorn and Associates, 3 Pages (Oct. 28, 1994).

Press Release, "Parkervision, Inc. Announces First Significant Dealer Sale of its Cameraman® System II," Lippert/Heilshorn and Associates, 2 Pages (Nov. 7, 1994).

Press Release, "Parkervision, Inc. Announces Fourth Quarter and Year End Results," Lippert/Heilshorn and Associates, 2 Pages (Mar. 1, 1995).

Press Release, "Parkervision, Inc. Announces Joint Product Developments With VTEL," Lippert/Heilshorn and Associates, 2 Pages (Mar. 21, 1995).

Press Release, "Parkervision, Inc. Announces First Quarter Financial Results," Lippert/Heilshorn and Associates, 3 Pages (Apr. 28, 1995).

Press Release, "Parkervision Wins Top 100 Product Districts' Choice Award," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Jun. 29, 1995).

Press Release, "Parkervision National Sales Manager Next President of USDLA," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Jul. 6, 1995).

Press Release, "Parkervision Granted New Patent," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Jul. 21, 1995).

Press Release, "Parkervision, Inc. Announces Second Quarter and Six Months Financial Results," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jul. 31, 1995).

Press Release, "Parkervision, Inc. Expands Its Cameraman System II Product Line," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Sep. 22, 1995).

Press Release, "Parkervision Announces New Camera Control Technology," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (October 25, 1995).

Press Release, "Parkervision, Inc. Announces Completion of VTEL/Parkervision Joint Product Line," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Oct. 30, 1995).

Press Release, "Parkervision, Inc. Announces Third Quarter and Nine Months Financial Results," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Oct. 30, 1995).

Press Release, "Parkervision's Cameraman Personal Locator Camera System Wins Telecon XV Award," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Nov. 1, 1995).

Press Release, "Parkervision, Inc. Announces Purchase Commitment From VTEL Corporation," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Feb. 26, 1996).

Press Release, "ParkerVision, Inc. Announces Fourth Quarter and Year End Results," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Feb. 27, 1996).

Press Release, "ParkerVision, Inc. Expands its Product Line," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Mar. 7, 1996).

Press Release, "ParkerVision Files Patents for its Research of Wireless Technology," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Mar. 28, 1996).

Press Release, "Parkervision, Inc. Announces First Significant Sale of Its Cameraman® Three-Chip System," Parkervision Marketing and Manufacturing Headquarters, 2 pages (Apr. 12, 1996).

Press Release, "Parkervision, Inc. Introduces New Product Line For Studio Production Market," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Apr. 15, 1996).

Press Release, "Parkervision, Inc. Announces Private Placement of 800,000 Shares," Parkervision Marketing and Manufacturing Headquarters, 1 Page (Apr. 15, 1996).

Press Release, "Parkervision, Inc. Announces First Quarter Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Apr. 30, 1996).

Press Release, "ParkerVision's New Studio Product Wins Award," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jun. 5, 1996).

Press Release, "Parkervision, Inc. Announces Second Quarter and Six Months Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Aug. 1, 1996).

Press Release, "Parkervision, Inc. Announces Third Quarter and Nine Months Financial Results," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Oct. 29, 1996).

Press Release, "PictureTel and ParkerVision Sign Reseller Agreement," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Oct. 30, 1996).

Press Release, "CLI and ParkerVision Bring Enhanced Ease-of-Use to Videoconferencing," CLI/Parkervision, 2 Pages (Jan. 20, 1997).

Press Release, "Parkervision, Inc. Announces Fourth Quarter and Year End Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Feb. 27, 1997).

Press Release, "Parkervision, Inc. Announces First Quarter Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Apr. 29, 1997).

Press Release, "NEC and Parkervision Make Distance Learning Closer," NEC America, 2 Pages (Jun. 18, 1997).

Press Release, "Parkervision Supplies JPL with Robotic Cameras, Cameraman Shot Director for Mars Mission," Parkervision Marketing and Manufacturing Headquarters, 2 pages (Jul. 8, 1997).

Press Release, "ParkerVision and IBM Join Forces to Create Wireless Computer Peripherals," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jul. 23, 1997).

Press Release, "ParkerVision, Inc. Announces Second Quarter and Six Months Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Jul. 31, 1997).

Press Release, "Parkervision, Inc. Announces Private Placement of 990,000 Shares," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Sep. 8, 1997).

Press Release, "Wal-Mart Chooses Parkervision for Broadcast Production," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Oct. 24, 1997).

Press Release, "Parkervision, Inc. Announces Third Quarter Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Oct. 30, 1997).

Press Release, "ParkerVision Announces Breakthrough in Wireless Radio Frequency Technology," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Dec. 10, 1997).

Press Release, "Parkervision, Inc. Announces the Appointment of Joseph F. Skovron to the Position of Vice President, Licensing—Wireless Technologies," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jan. 9, 1998).

Press Release, "Parkervision Announces Existing Agreement with IBM Terminates—Company Continues with Strategic Focus Announced in December," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jan. 27, 1998).

Press Release, "Laboratory Tests Verify Parkervision Wireless Technology," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Mar. 3, 1998).

Press Release, "Parkervision, Inc. Announces Fourth Quarter and Year End Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Mar. 5, 1998).

Press Release, "Parkervision Awarded Editors' Pick of Show for NAB 98," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Apr. 15, 1998).

- Press Release, "Parkervision Announces First Quarter Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (May 4, 1998).
- Press Release, "Parkervision 'DIRECT2DATA' Introduced in Response to Market Demand," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Jul. 9, 1998).
- Press Release, "Parkervision Expands Senior Management Team," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Jul. 29, 1998).
- Press Release, "Parkervision Announces Second Quarter and Six Month Financial Results," Parkervision Marketing and Manufacturing Headquarters, 4 Pages (Jul. 30, 1998).
- Press Release, "Parkervision Announces Third Quarter and Nine Month Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Oct. 30, 1998).
- Press Release, "Questar Infocomm, Inc. Invests \$5 Million in Parkervision Common Stock," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Dec. 2, 1998).
- Press Release, "Parkervision Adds Two New Directors," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Mar. 5, 1999).
- Press Release, "Parkervision Announces Fourth Quarter and Year End Financial Results," Parkervision Marketing and Manufacturing Headquarters, 3 Pages (Mar. 5, 1999).
- Press Release, "Joint Marketing Agreement Offers New Automated Production Solution," Parkervision Marketing and Manufacturing Headquarters, 2 Pages (Apr. 13, 1999).
- "Project COST 205: Scintillations in Earth-satellite links," *Alta Frequenza: Scientific Review in Electronics*, AEI, vol. LIV, No. 3, pp. 209-211 (May-Jun. 1985).
- Razavi, B., *RF Microelectronics*, Prentice-Hall, pp. 147-149 (1998).
- Reeves, R.J.D., "The Recording and Collocation of Waveforms (Part 1)," *Electronic Engineering*, Morgan Brothers Limited, vol. 31, No. 373, pp. 130-137 (Mar. 1959).
- Reeves, R.J.D., "The Recording and Collocation of Waveforms (Part 2)," *Electronic Engineering*, Morgan Brothers Limited, vol. 31, No. 374, pp. 204-212 (Apr. 1959).
- Rein, H.M. and Zahn, M., "Subnanosecond-Pulse Generator with Variable Pulsewidth Using Avalanche Transistors," *Electronics Letters*, IEE, vol. 11, No. 1, pp. 21-23 (Jan. 9, 1975).
- Riad, S.M. and Nahman, N.S., "Modeling of the Feed-through Wideband (DC to 12.4 Ghz) Sampling-Head," *IEEE MTT-S International Microwave Symposium Digest*, IEEE, pp. 267-269 (Jun. 27-29, 1978).
- Rizzoli, V. et al., "Computer-Aided Noise Analysis of MESFET and HEMT Mixers," *IEEE Transactions on Microwave Theory and Techniques*, IEEE, vol. 37, No. 9, pp. 1401-1410 (Sep. 1989).
- Rowe, H.E., *Signals and Noise in Communication Systems*, D. Van Nostrand Company, Inc., Princeton, New Jersey, including, for example, Chapter V, Pulse Modulation Systems (1965).
- Rücker, F. and Dintelmann, F., "Effect of Antenna Size on OTS Signal Scintillations and Their Seasonal Dependence," *Electronics Letters*, IEE, vol. 19, No. 24, pp. 1032-1034 (Nov. 24, 1983).
- Russell, R. and Hoare, L., "Millimeter Wave Phase Locked Oscillators," *Military Microwaves '78 Conference Proceedings*, Microwave Exhibitions and Publishers, pp. 238-242 (Oct. 25-27, 1978).
- Sabel, L.P., "A DSP Implementation of a Robust Flexible Receiver/Demultiplexer for Broadcast Data Satellite Communications," *The Institution of Engineers Australia Communications Conference*, Institution of Engineers, Australia, pp. 218-223 (Oct. 16-18, 1990).
- Salous, S., "IF digital generation of FMCW waveforms for wideband channel characterization," *IEE Proceedings-I*, IEE, vol. 139, No. 3, pp. 281-288 (Jun. 1992).
- "Sampling Loops Lock Sources to 23 Ghz," *Microwaves & RF*, Penton Publishing, p. 212 (Sep. 1990).
- Sasikumar, M. et al., "Active Compensation in the Switched-Capacitor Biquad," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 1008-1009 (Aug. 1983).
- Saul, P.H., "A GaAs MESFET Sample and Hold Switch," *Fifth European Solid State Circuits Conference-ESSCIRC 79*, IEE, pp. 5-7 (1979).
- Shen, D.H. et al., "A 900-MHZ RF Front-End with Integrated Discrete-Time Filtering," *IEEE Journal of Solid-State Circuits*, IEEE Solid-State Circuits Council, vol. 31, No. 12, pp. 1945-1954 (Dec. 1996).
- Shen, X.D. and Vilar, E., "Anomalous transhorizon propagation and meteorological processes of a multilink path," *Radio Science*, American Geophysical Union, vol. 30, No. 5, pp. 1467-1479 (Sep.-Oct. 1995).
- Shen, X. and Tawfik, A.N., "Dynamic Behaviour of Radio Channels Due to Trans-Horizon Propagation Mechanisms," *Electronics Letters*, IEE, vol. 29, No. 17, pp. 1582-1583 (Aug. 19, 1993).
- Shen, X. et al., "Modeling Enhanced Spherical Diffraction and Troposcattering on a Transhorizon Path with aid of the parabolic Equation and Ray Tracing Methods," *IEE Colloquium on Common modeling techniques for electromagnetic wave and acoustic wave propagation*, IEE, pp. 4/1-4/7 (Mar. 8, 1996).
- Shen, X. and Vilar, E., "Path loss statistics and mechanisms of transhorizon propagation over a sea path," *Electronics Letters*, IEE, vol. 32, No. 3, pp. 259-261 (Feb. 1, 1996).
- Shen, D. et al., "A 900 MHz Integrated Discrete-Time Filtering RF Front-End," *IEEE International Solid State Circuits Conference*, IEEE, vol. 39, pp. 54-55 and 417 (Feb. 1996).
- Spillard, C. et al., "X-Band Tropospheric Transhorizon Propagation Under Differing Meteorological Conditions," *Sixth International Conference on Antennas and Propagation (ICAP 89) Part 2: Propagation*, IEE, pp. 451-455 (Apr. 4-7, 1989).
- Stafford, K.R. et al., "A Complete Monolithic Sample/Hold Amplifier," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-9, No. 6, pp. 381-387 (Dec. 1974).
- Staruk, W. Jr. et al., "Pushing HF Data Rates," *Defense Electronics*, EW Communications, vol. 17, No. 5, pp. 211, 213, 215, 217, 220 and 222 (May 1985).
- Stephenson, A.G., "Digitizing multiple RF signals requires an optimum sampling rate," *Electronics*, McGraw-Hill, pp. 106-110 (Mar. 27, 1972).
- Sugarman, R., "Sampling Oscilloscope for Statistically Varying Pulses," *The Review of Scientific Instruments*, American Institute of Physics, vol. 28, No. 11, pp. 933-938 (Nov. 1957).
- Sylvain, M., "Experimental probing of multipath microwave channels," *Radio Science*, American Geophysical Union, vol. 24, No. 2, pp. 160-178 (Mar.-Apr. 1989).
- Takano, T., "NOVEL GaAs Pet Phase Detector Operable to Ka Band," *IEEE MTT-S Digest*, IEEE, pp. 381-383 (1984).
- Tan, M.A., "Biquadratic Transconductance Switched-Capacitor Filters," *IEEE Transactions on Circuits and Systems- I: Fundamental Theory and Applications*, IEEE Circuits and Systems Society, vol. 40, No. 4, pp. 272-275 (Apr. 1993).
- Tanaka, K. et al., "Single Chip Multisystem AM Stereo Decoder IC," *IEEE Transactions on Consumer Electronics*, IEEE Consumer Electronics Society, vol. CE-32, No. 3, pp. 482-496 (Aug. 1986).
- Tawfik, A.N., "Amplitude, Duration and Predictability of Long Hop Trans-Horizon X-band Signals Over the Sea," *Electronics Letters*, IEE, vol. 28, No. 6, pp. 571-572 (Mar. 12, 1992).
- Tawfik, A.N. and Vilar, E., "Correlation of Transhorizon Signal Level Strength with Localized Surface Meteorological Parameters," *Eighth International Conference on Antennas and Propagation*, Electronics Division of the IEE, pp. 335-339 (Mar. 30-Apr. 2, 1993).
- Tawfik, A.N. and Vilar, E., "Dynamic Structure of a Transhorizon Signal at X-band Over a Sea Path," *Sixth International Conference on Antennas and Propagation (ICAP.89) Part 2: Propagation*, IEE, pp. 446-450 (Apr. 4-7, 1989).
- Tawfik, A.N. and Vilar, E., "Statistics of Duration and Intensity of Path Loss in a Microwave Transhorizon Sea-Path," *Electronics Letters*, IEE, vol. 26, No. 7, pp. 474-476 (Mar. 29, 1990).
- Tawfik, A.N. and Vilar, E., "X-Band Transhorizon Measurements of CW Transmissions Over the Sea— Part 1: Path Loss, Duration of Events, and Their Modeling," *IEEE Transactions on Antennas and Propagation*, IEEE Antennas and Propagation Society, vol. 41, No. 11, pp. 1491-1500 (Nov. 1993).
- Temes, G.C. and Tsividis, T., "The Special Section on Switched-Capacitor Circuits," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 915-916 (Aug. 1983).

- Thomas, G.B., *Calculus and Analytic Geometry*, Third Edition, Addison-Wesley Publishing, pp. 119-133 (1960).
- Tomassetti, Q., "An Unusual Microwave Mixer," *16th European Microwave Conference*, Microwave Exhibitions and Publishers, pp. 754-759 (Sep. 8-12, 1986).
- Tortoli, P. et al., "Bidirectional Doppler Signal Analysis Based on a Single RF Sampling Channel," *IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control*, IEEE Ultrasonics, Ferroelectrics, and Frequency Control Society, vol. 41, No. 1, pp. 1-3 (Jan. 1984).
- Tsividis, Y. and Antognetti, P. (Ed.), *Design of MOS VLSI Circuits for Telecommunications*, Prentice-Hall, p. 304 (1985).
- Tsividis, Y., "Principles of Operation and Analysis of Switched-Capacitor Circuits," *Proceedings of the IEEE*, IEEE, vol. 71, No. 8, pp. 926-940 (Aug. 1983).
- Tsurumi, H. and Maeda, T., "Design Study on a Direct Conversion Receiver Front-End for 280 MHz, 900 MHz, and 2.6 GHz Band Radio Communication Systems," *41st IEEE Vehicular Technology Conference*, IEEE Vehicular Technology Society, pp. 457-462 (May 19-22, 1991).
- Valdmanis, J.A. et al., "Picosecond and Subpicosecond Optoelectronics for Measurements of Future High Speed Electronic Devices," *IEDM Technical Digest*, IEEE, pp. 597-600 (Dec. 5-7, 1983).
- van de Kamp, M.M.J.L., "Asymmetric signal level distribution due to tropospheric scintillation," *Electronics Letters*, IEE, vol. 34, No. 11, pp. 1145-1146 (May 28, 1998).
- Vasseur, H. and Vanhoenacker, D., "Characterization of tropospheric turbulent layers from radiosonde data," *Electronics Letters*, IEE, vol. 34, No. 4, pp. 318-319 (Feb. 19, 1998).
- Verdone, R., "Outage Probability Analysis for Short-Range Communication Systems at 60 GHz in ATT Urban Environments," *IEEE Transactions on Vehicular Technology*, IEEE Vehicular Technology Society, vol. 46, No. 4, pp. 1027-1039 (Nov. 1997).
- Vierira-Ribeiro, S.A., *Single-IF DECT Receiver Architecture using a Quadrature Sub-Sampling Band-Pass Sigma-Delta Modulator*, Thesis for Degree of Master's of Engineering, Carleton University, UMI Dissertation Services, pp. 1-180 (Apr. 1995).
- Vilar, E. et al., "A Comprehensive/Selective MM-Wave Satellite Downlink Experiment on Fade Dynamics," *Tenth International Conference on Antennas and Propagation*, Electronics Division of the IEE, pp. 2.98-2.101 (Apr. 14-17, 1997).
- Vilar, E. et al., "A System to Measure LOS Atmospheric Transmittance at 19 GHz," *AGARD Conference Proceedings No. 346: Characteristics of the Lower Atmosphere Influencing Radio Wave Propagation*, AGARD, pp. 8-1-8-16 (Oct. 4-7, 1983).
- Vilar, E. and Smith, H., "A Theoretical and Experimental Study of Angular Scintillations in Earth Space Paths," *IEEE Transactions on Antennas and Propagation*, IEEE, vol. AP-34, No. 1, pp. 2-10 (Jan. 1986).
- Vilar, E. et al., "A Wide Band Transhorizon Experiment at 11.6 GHz," *Eighth International Conference on Antennas and Propagation*, Electronics Division of the IEE, pp. 441-445 (Mar. 30-Apr. 2, 1993).
- Vilar, E. and Matthews, P.A., "Amplitude Dependence of Frequency in Oscillators," *Electronics Letters*, IEE, vol. 8, No. 20, pp. 509-511 (Oct. 5, 1972).
- Vilar, E. et al., "An experimental mm-wave receiver system for measuring phase noise due to atmospheric turbulence," *Proceedings of the 25th European Microwave Conference*, Nexus House, pp. 114-119 (1995).
- Vilar, E. and Burgueño, A., "Analysis and Modeling of Time Intervals Between Rain Rate Exceedances in the Context of Fade Dynamics," *IEEE Transactions on Communications*, IEEE Communications Society, vol. 39, No. 9, pp. 1306-1312 (Sep. 1991).
- Vilar, E. et al., "Angle of Arrival Fluctuations in High and Low Elevation Earth Space Paths," *Fourth International Conference on Antennas and Propagation (ICAP 85)*, Electronics Division of the IEE, pp. 83-88 (Apr. 16-19, 1985).
- Vilar, E., "Antennas and Propagation: A Telecommunications Systems Subject," *Electronics Division Colloquium on Teaching Antennas and Propagation to Undergraduates*, IEE, pp. 7/1-7/6 (Mar. 8, 1988).
- Vilar, E. et al., "CERS, Millimetre-Wave Beacon Package and Related Payload Doppler Correction Strategies," *Electronics Division Colloquium on CERS- Communications Engineering Research Satellite*, IEE, pp. 10/1-10/10 (Apr. 10, 1984).
- Vilar, E. and Mouldsley, T.J., "Comment and Reply: Probability Density Function of Amplitude Scintillations," *Electronics Letters*, IEE, vol. 21, No. 14, pp. 620-622 (Jul. 4, 1985).
- Vilar, E. et al., "Comparison of Rainfall Rate Duration Distributions for ILE-IFE and Barcelona," *Electronics Letters*, IEE, vol. 28, No. 20, pp. 1922-1924 (Sep. 24, 1992).
- Vilar, E., "Depolarization and Field Transmittances in Indoor Communications," *Electronics Letters*, IEE, vol. 27, No. 9, pp. 732-733 (Apr. 25, 1991).
- Vilar, E. and Larsen, J.R., "Elevation Dependence of Amplitude Scintillations on Low Elevation Earth Space Paths," *Sixth International Conference on Antennas and Propagation (ICAP 89) Part 2: Propagation*, IEE, pp. 150-154 (Apr. 4-7, 1989).
- Vilar, E. et al., "Experimental System and Measurements of Transhorizon Signal Levels at 11 GHz," *18th European Microwave Conference*, Microwave Exhibitions and Publishers Ltd., pp. 429-435 (Sep. 12-15, 1988).
- Vilar, E. and Matthews, P.A., "Importance of Amplitude Scintillations in Millimetric Radio Links," *Proceedings of the 4th European Microwave Conference*, Microwave Exhibitions and Publishers, pp. 202-206 (Sep. 10-13, 1974).
- Vilar, E. and Haddon, J., "Measurement and Modeling of Scintillation Intensity to Estimate Turbulence Parameters in an Earth-Space Path," *IEEE Transactions on Antennas and Propagation*, IEEE Antennas and Propagation Society, vol. AP-32, No. 4, pp. 340-346 (Apr. 1984).
- Vilar, E. and Matthews, P.A., "Measurement of Phase Fluctuations on Millimetric Radiowave Propagation," *Electronics Letters*, IEE, vol. 7, No. 18, pp. 566-568 (Sep. 9, 1971).
- Vilar, E. and Wan, K.W., "Narrow and Wide Band Estimates of Field Strength for Indoor Communications in the Millimetre Band," *Electronics Division Colloquium on Radiocommunications in the Range 30-60 GHz*, IEE, pp. 5/1-5/8 (Jan. 17, 1991).
- Vilar, E. and Faulkner, N.D., "Phase Noise and Frequency Stability Measurements. Numerical Techniques and Limitations," *Electronics Division Colloquium on Low Noise Oscillators and Synthesizer*, IEE, 5 pages (Jan. 23, 1986).
- Vilar, E. and Senin, S., "Propagation phase noise identified using 40 GHz satellite downlink," *Electronics Letters*, IEE, vol. 33, No. 22, pp. 1901-1902 (Oct. 23, 1997).
- Vilar, E. et al., "Scattering and Extinction: Dependence Upon Rain-drop Size Distribution in Temperate (Barcelona) and Tropical (Belem) Regions," *Tenth International Conference on Antennas and Propagation*, Electronics Division of the IEE, pp. 2.230-2.233 (Apr. 14-17, 1997).
- Vilar, E. and Haddon, J., "Scintillation Modeling and Measurement—A Tool for Remote-Sensing Slant Paths," *AGARD Conference Proceedings No. 332: Propagation Aspects of Frequency Sharing, Interference And System Diversity*, AGARD, pp. 27-1-27-13 (Oct. 18-22, 1982).
- Vilar, E., "Some Limitations on Digital Transmission Through Turbulent Atmosphere," *International Conference on Satellite Communication Systems Technology*, Electronics Division of the IEE, pp. 169-187 (Apr. 7-10, 1975).
- Vilar, E. and Matthews, P.A., "Summary of Scintillation Observations in a 36 GHz Link Across London," *International Conference on Antennas and Propagation Part 2: Propagation*, IEE, pp. 36-40 (Nov. 28-30, 1978).
- Vilar, E. et al., "Wideband Characterization of Scattering Channels," *Tenth International Conference on Antennas and Propagation*, Electronics Division of the IEE, pp. 2.353-2.358 (Apr. 14-17, 1997).
- Vollmer, A., "Complete GPS Receiver Fits on Two Chips," *Electronic Design*, Penton Publishing, pp. 50, 52, 54 and 56 (Jul. 6, 1998).
- Voltage and Time Resolution in Digitizing Oscilloscopes: Application Note 348*, Hewlett Packard, pp. 1-11 (Nov. 1986).
- Wan, K.W. et al., "A Novel Approach to the Simultaneous Measurement of Phase and Amplitude Noises in Oscillator," *Proceedings of the 19th European Microwave Conference*, Microwave Exhibitions and Publishers Ltd., pp. 809-813 (Sep. 4-7, 1989).
- Wan, K.W. et al., "Extended Variances and Autoregressive/Moving Average Algorithm for the Measurement and Synthesis of Oscillator

- Phase Noise," *Proceedings Of the 43rd Annual Symposium on Frequency Control*, IEEE, PP. 331-335 (1989).
- Wan, K.W. et al., "Wideband Transhorizon Channel Sounder at 11 Ghz," *Electronics Division Colloquium on High Bit Rate UHF/SHF Channel Sounders—Technology and Measurement*, IEE, pp. 3/1-3/5 (Dec. 3, 1993).
- Wang, H., "A 1-V Multigigahertz RF Mixer Core in 0.5- μ m CMOS," *IEEE Journal of Solid-State Circuits*, IEEE Solid-State Circuits Society, vol. 33, No. 12, pp. 2265-2267 (Dec. 1998).
- Watson, A.W.D. et al., "Digital Conversion and Signal Processing for High Performance Communications Receivers," *Digital Processing of Signals in Communications*, Institution of Electronic and Radio Engineers, pp. 367-373 (Apr. 22-26, 1985).
- Weast, R.C. et al. (Ed.), *Handbook of Mathematical Tables*, Second Edition, The Chemical Rubber Co., pp. 480-485 (1964).
- Wiley, R.G., "Approximate FM Demodulation Using Zero Crossings," *IEEE Transactions on Communications*, IEEE, vol. COM-29, No. 7, pp. 1061-1065 (Jul. 1981).
- Worthman, W., "Convergence . . . Again," *RF Design*, Primedia, p. 102 (Mar. 1999).
- Young, I.A. and Hodges, D.A., "MOS Switched-Capacitor Analog Sampled-Data Direct-Form Recursive Filters," *IEEE Journal of Solid-State Circuits*, IEEE, vol. SC-14, No. 6, pp. 1020-1033 (Dec. 1979).
- Translation of Specification and Claims of FR Patent No. 2245130, 3 pages (Apr. 18, 1975—Date of publication of application).
- Fest, Jean-Pierre, "Le Convertisseur A/N Revolutionne Le Recepteur Radio," *Electronique*, JMJ (Publisher), No. 54, pp. 40-42 (Dec. 1995).
- Translation of DE Patent No. 35 41 031 A1, 22 pages (May 22, 1986—Date of publication of application).
- Translation of EP Patent No. 0 732 803 A1, 9 pages (Sep. 18, 1996—Date of publication of application).
- Fest, Jean-Pierre, "The A/D Converter Revolutionizes the Radio Receiver," *Electronique*, JMJ (Publisher), No. 54, 3 pages (Dec. 1995). (Translation of Doc. AQ50).
- Translation of German Patent No. DE 197 35 798 C1, 8 pages (Jul. 16, 1998—Date of publication of application).
- Miki, S. and Nagahama, R., *Modulation System II*, Common Edition 7, Kyoritsu Publishing Co., Ltd., pp. 146-154 (Apr. 30, 1956).
- Miki, S. and Nagahama, R., *Modulation System II*, Common Edition 7, Kyoritsu Publishing Co., Ltd., pp. 146-149 (Apr. 30, 1956). (Partial Translation of Doc. AQ51).
- Rabiner, L.R. and Gold, B., *Theory And Application Of Digital Signal Processing*, Prentice-Hall, Inc., pp. v-xii and 40-46 (1975).
- English-language Abstract of Japanese Patent Publication No. 08-032556, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Feb. 2, 1996—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 08-139524, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (May 31, 1996—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 59-144249, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Aug. 18, 1984—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 63-054002, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Mar. 8, 1988—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 06-237276, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Aug. 23, 1994—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 08-023359, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Jan. 23, 1996—Date of publication of application).
- Translation of Japanese Patent Publication No. 47-2314, 7 pages (Feb. 4, 1972—Date of publication of application).
- Partial Translation of Japanese Patent Publication No. 58-7903, 3 pages (Jan. 17, 1983—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 58-133004, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Aug. 8, 1993—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 60-058705, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Apr. 4, 1985—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 04-123614, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Apr. 23, 1992—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 04-127601, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Apr. 28, 1992—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 05-175730, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Jul. 13, 1993—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 05-175734, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Jul. 13, 1993—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 07-154344, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Jun 16, 1995—Date of publication of application).
- English-language Abstract of Japanese Patent Publication of No. 07-307620, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Nov. 21, 1995—Date of publication of application).
- Oppenheim, A.V. and Schafer, R.W., *Digital Signal Processing*, Prentice-Hall, pp. vii-x, 6-35, 45-78, 87-121 and 136-165 (1975).
- English-language Abstract of Japanese Patent Publication No. 55-066057, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (May 19, 1995—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 63-065587, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Mar. 24, 1988—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 63-153691, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Jun. 27, 1988—Date of publication of application).
- Translation of Japanese Patent Publication No. 60-130203, 3 pages (Jul. 11, 1985—Date of publication of application).
- Razavi, B., "A 900-MHz/1.8-GHz CMOS Transmitter for Dual-Band Applications," *Symposium on VLSI Circuits Digest of Technical Papers*, IEEE, pp. 128-131 (1998).
- Ritter, G.M., "SDA, A New Solution for Transceivers," *16th European Microwave Conference*, Microwave Exhibitions and Publishers, pp. 729-733 (Sep. 8, 1986).
- Dialog File 351 (Derwent WPI) English Language Patent Abstract for FR 2 669 787, 1 page (May 29, 1992—Date of publication of application).
- Akos, D.M. et al., "Direct Bandpass Sampling of Multiple Distinct RF Signals," *IEEE Transactions on Communications*, IEEE, vol. 47, No. 7, pp. 983-988 (July. 1999).
- Patel, M. et al., "Bandpass Sampling for Software Radio Receivers, and the Effect of Oversampling on Aperture Jitter," *VTC 2002*, IEEE, pp. 1901-1905 (2002).
- English-language Abstract of Japanese Patent Publication No. 61-030821, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Feb. 13, 1986—Date of publication of application).
- English-language Abstract of Japanese Patent Publication No. 05-327356, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Dec. 10, 1993—Date of publication of application).
- Taylor, D., "A low-noise, High-performance Zero IF Quadrature Detector/Preamplifier," *RF Design*, Primedia Business Magazines & Media, Inc., pp. 58, 60, 62 and 69 (Mar. 2003).
- Dines, J.A.B., "Smart Pixel Optoelectronic Receiver Based on a Charge Sensitive Amplifier Design," *IEEE Journal of Selected Topics in Quantum Electronics*, IEEE, vol. 2, No. 1, pp. 117-120 (Apr. 1996).
- Simoni, A. et al., "A Digital Camera for Machine Vision," *20th International Conference on Industrial Electronics, Control and Instrumentation*, IEEE, pp. 879-883 (Sep. 1994).
- Stewart, R.W. and Pfann, E., "Oversampling and sigma-delta strategies for data conversion," *Electronics & Communication Engineering Journal*, IEEE, pp. 37-47 (Feb. 1998).
- Rudell, J.C. et al., "A 1.9-GHz Wide-Band IF Double Conversion CMOS Receiver for Cordless Telephone Applications," *IEEE Journal of Solid-State Circuits*, IEEE, vol. 32, No. 12, pp. 2071-2088 (Dec. 1997).
- English-language Abstract of Japanese Patent Publication No. 09-036664, from <http://www1.ipdl.jpo.go.jp>, 2 Pages (Feb. 7, 1997—Date of publication of application).

- Simoni, A. et al., "A Single-Chip Optical Sensor with Analog Memory for Motion Detection," *IEEE Journal of Solid-State Circuits*, IEEE, vol. 30, No. 7, pp. 800-806 (Jul. 1995).
English Translation of German Patent Publication No. DE 196 48 915 A1, 10 pages.
- Deboo, Gordon J., *Integrated Circuits and Semiconductor Devices*, 2nd Edition, McGraw-Hill, Inc., pp. 41-45 (1977).
U.S. Appl. No. 10/961,272, filed Oct. 12, 2004, Sorrells et al.
U.S. Appl. No. 10/961,253, filed Oct. 12, 2004, Sorrells et al.
U.S. Appl. No. 10/961,342, filed Oct. 12, 2004, Sorrells et al.
U.S. Appl. No. 10/972,132, filed Oct. 25, 2004, Sorrells et al.
- Valdmanis, J.A. et al., "Picosecond and Subpicosecond Optoelectronics for Measurements of Future High Speed Electronics Devices," *IEDM Technical Digest*, IEEE, pp. 597-600 (Dec. 5-7, 1983).
- van de Kamp, M.M.J.L., "Asymmetric signal level distribution due to tropospheric scintillation," *Electronics Letters*, IEE, vol. 34, No. 11, pp. 1145-1146 (May 28, 1998).
- Vasseur, H. and Vanhoenacker, D., "Characterization of tropospheric turbulent layers from radiosonde data," *Electronics Letters*, vol. 34, No. 4, pp. 318-319 (Feb. 19, 1998).
- Verdone, R., "Outage Probability Analysis for Short-Range Communication Systems at 60 Ghz in ATT Urban Environments," *IEEE Transactions on Vehicular Technology*, IEEE Vehicular Technology Society, vol. 46, No. 4, pp. 1027-1039 (Nov. 1997).
- Vierira-Ribeiro, S.A., *Single-IF DECT Receiver Architecture using a Quadrature Sub-Sampling Band-Pass Sigma-Delta Modulator*, Thesis for Degree of Master's of Engineering, Carleton University, UMI Dissertation Services, pp. 1-180 (Apr. 1995).
- Wan, K.W. et al., "Wideband Transhorizon Channel Sounder at 11 Ghz," *Electronics Division Colloquium on High Bit Rate UHF/SHF Channel Sounders - Technology and Measurement*, IEE, pp. 3/1-3/5 (Dec. 3, 1993).
- Wang, H., "A 1-V Multigigahertz RF Mixer Core in 0.5 - μ m CMOS," *IEEE Journal of Solid-State Circuits*, IEEE Solid-State Circuits Society, vol. 33, No. 12, pp. 2265-2267 (Dec. 1998).
- Watson, A.W.D. et al., "Digital Conversion and Signal Processing for High Performance Communications Receivers," *Digital Processing of Signals in Communications*, Institution of Electronics and Radio Engineers, pp. 367-373 (Apr. 22-26, 1985).
- Weast, R.C. et al. (Ed.), *Handbook of Mathematical Tables*, Second Edition, The Chemical Rubber Co., pp. 480-485 (1964).
- Wiley, R.G., "Approximate FM Demodulation Using Zero Crossings," *IEEE Transactions on Communications*, IEEE, vol. COM-29, No. 7, pp. 1061-1065 (Jul. 1981).
- Hellwarth, G.A. and Jones, G.D., "Automatic Conditioning of Speech Signals," *IEEE Transactions on Audio and Electroacoustics*, vol. AU-16, No. 2, pp. 169-179 (Jun. 1968).
- English Abstract for German Patent No. DE 692 21 098 T2, 1 page, data supplied from the espacenet.

* cited by examiner

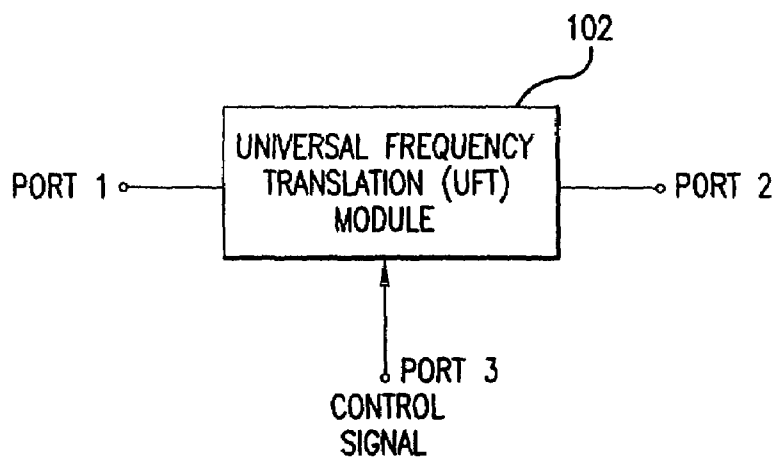


FIG. 1A

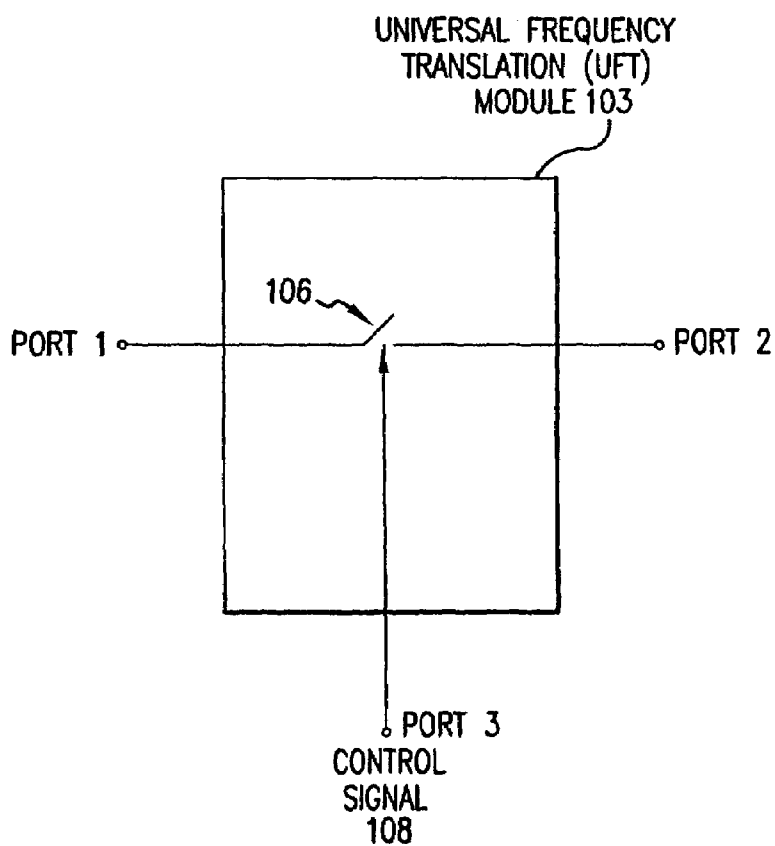


FIG. 1B

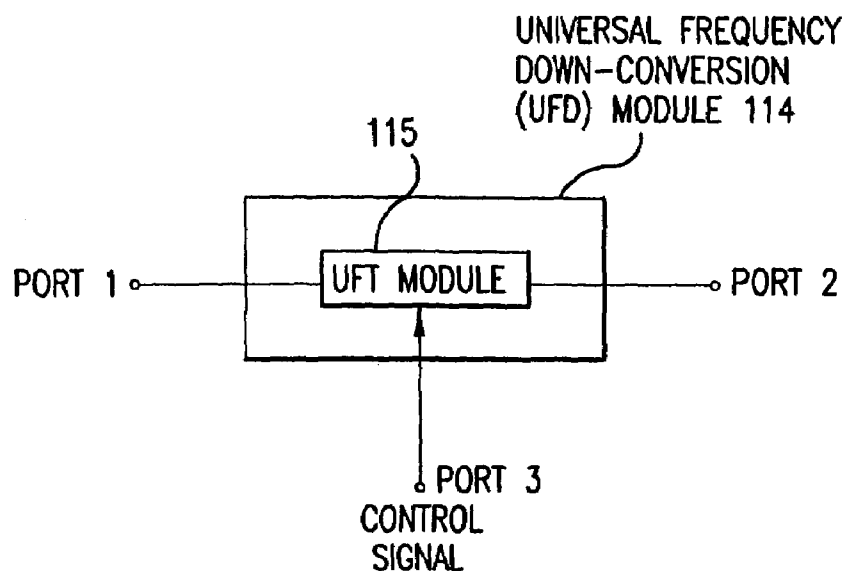


FIG. 1C

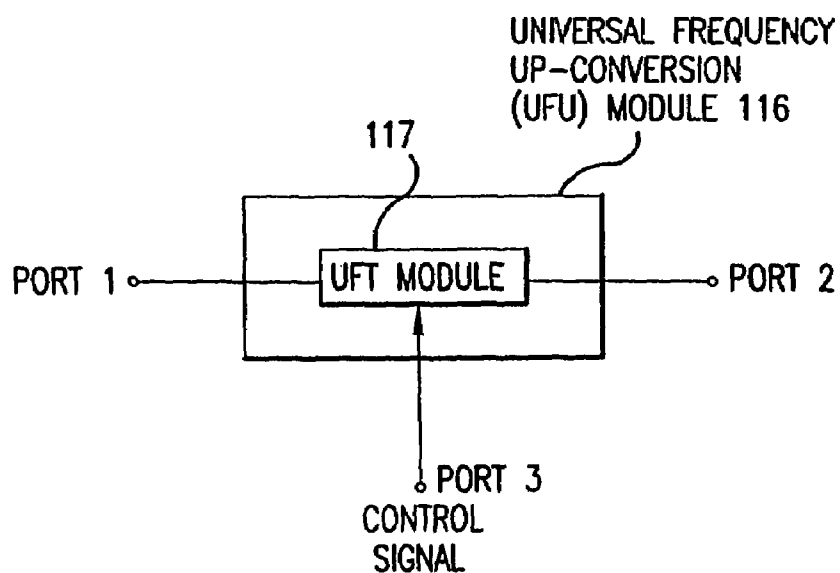
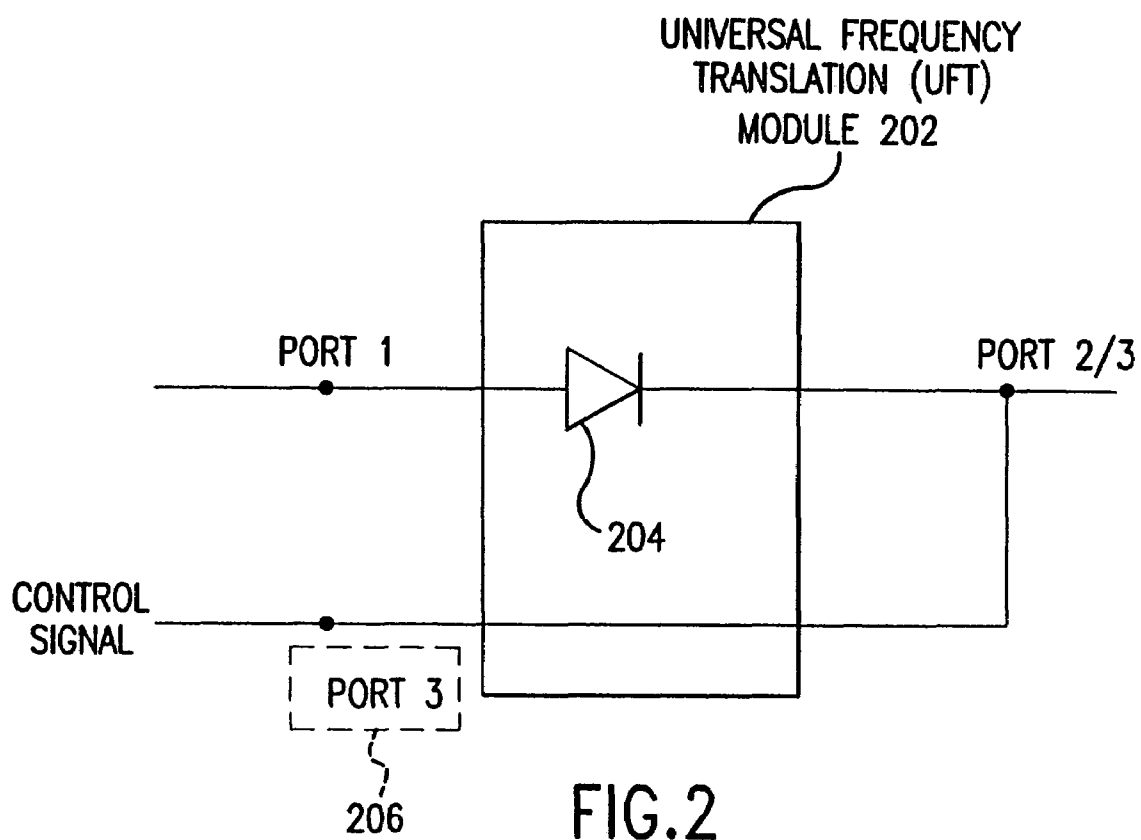


FIG. 1D



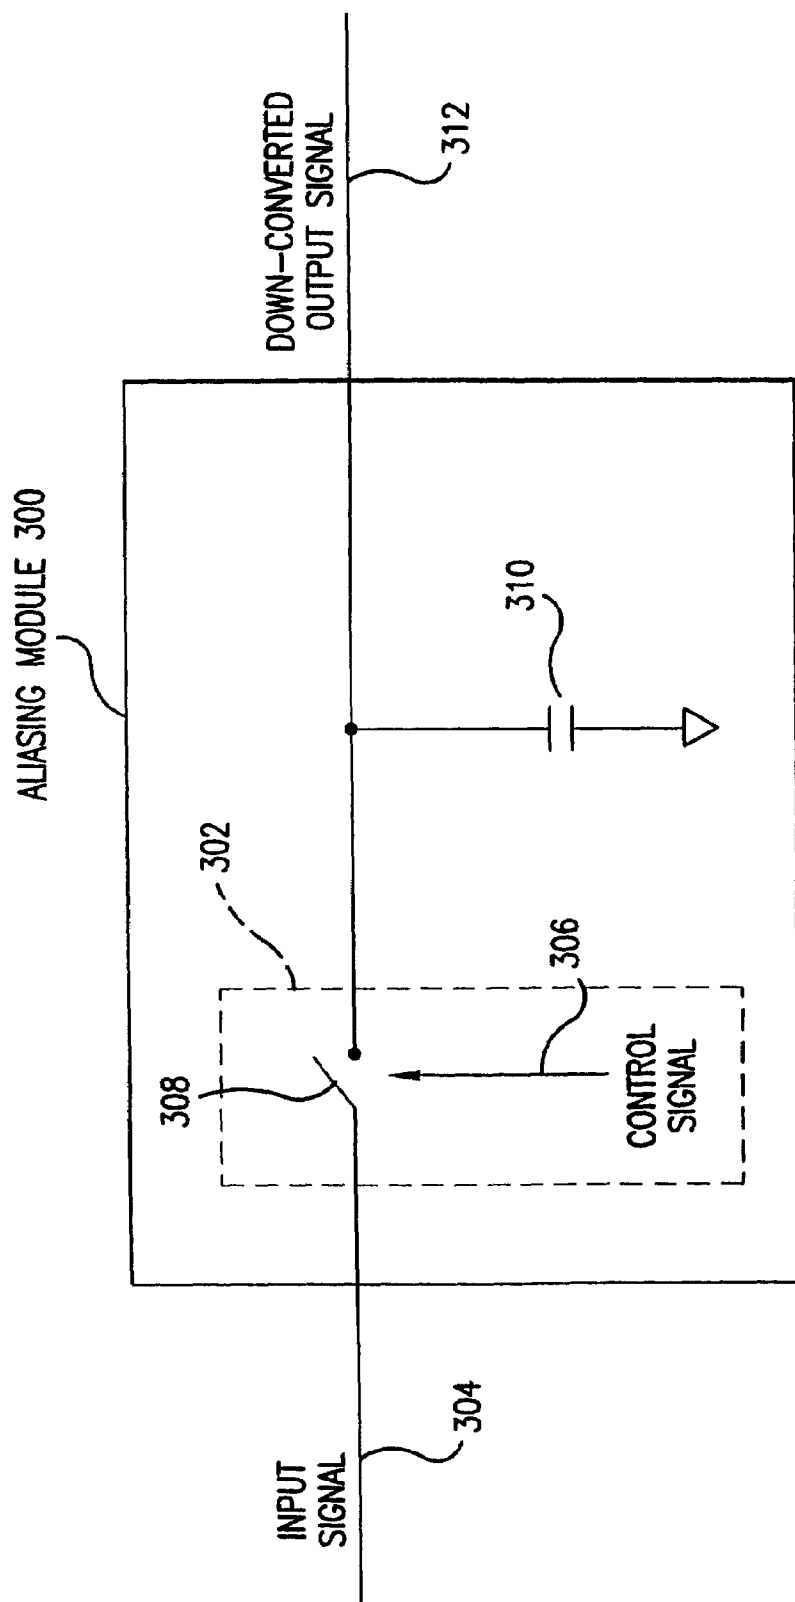


FIG. 3A

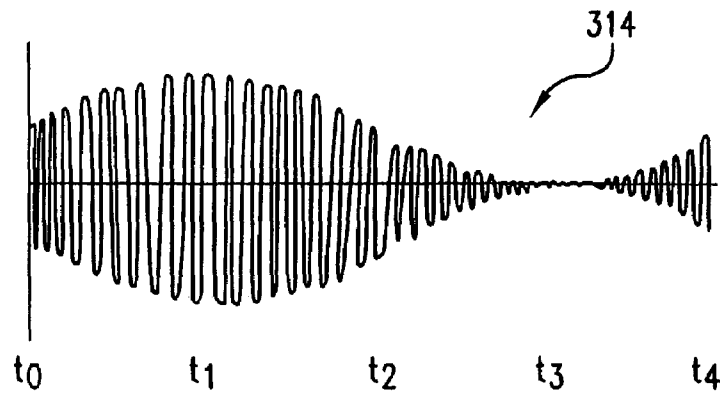


FIG. 3B

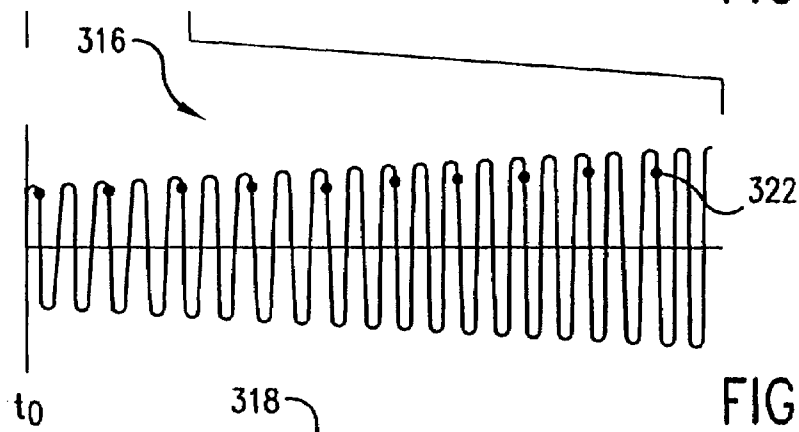


FIG. 3C

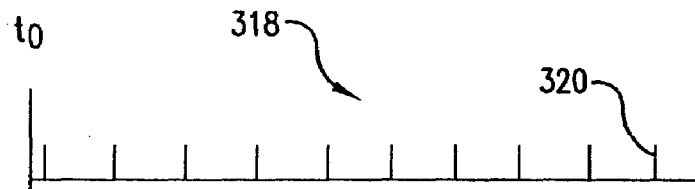


FIG. 3D

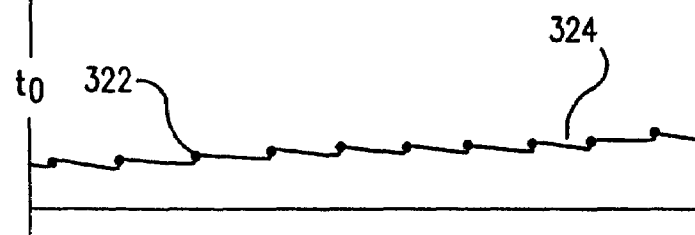


FIG. 3E

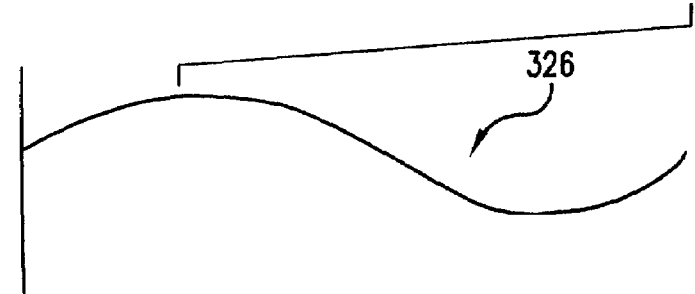


FIG. 3F

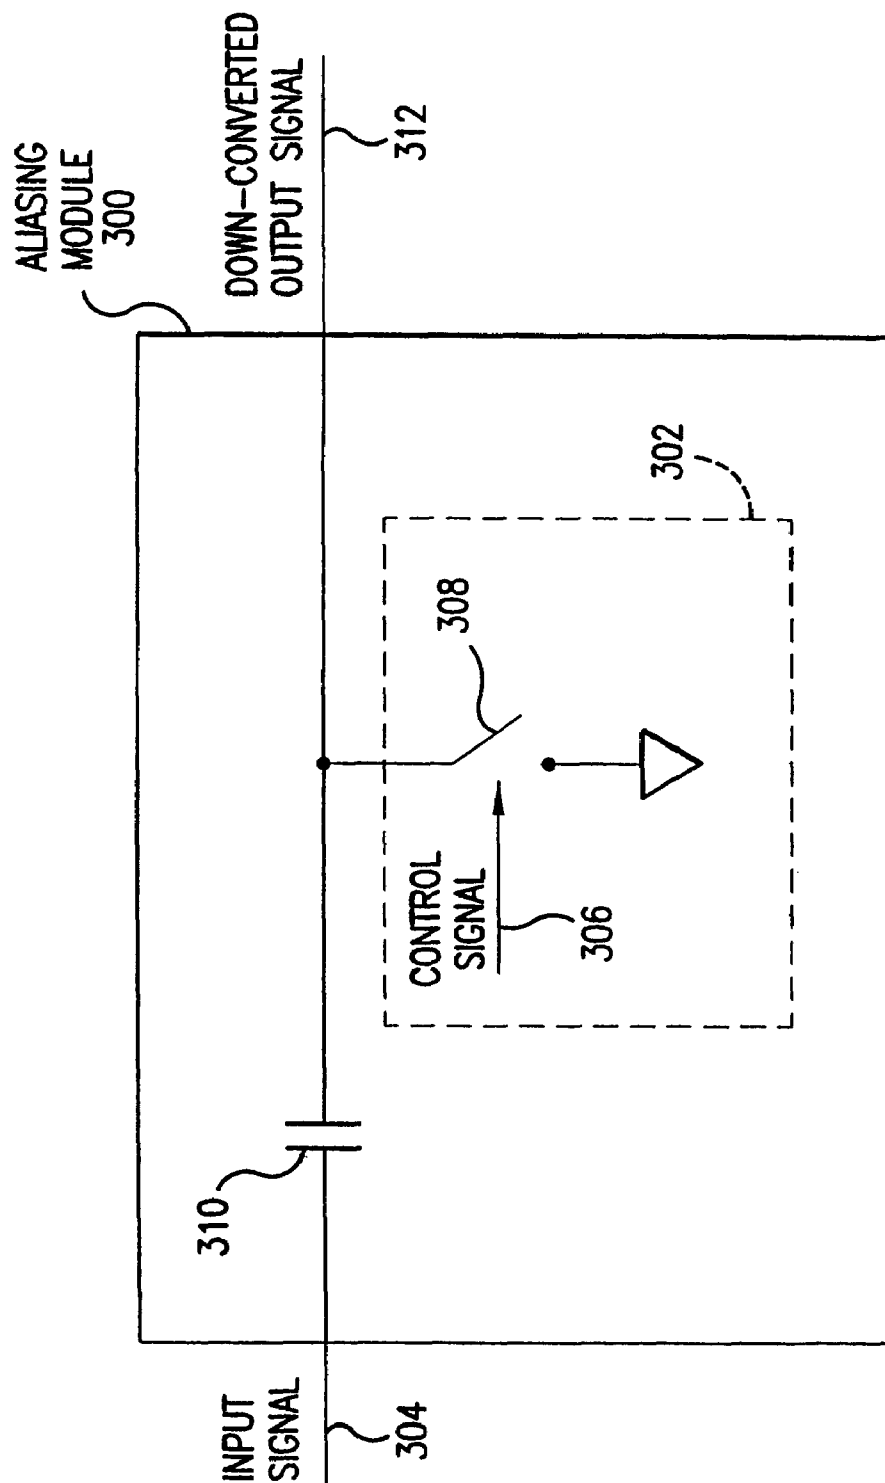


FIG. 3G

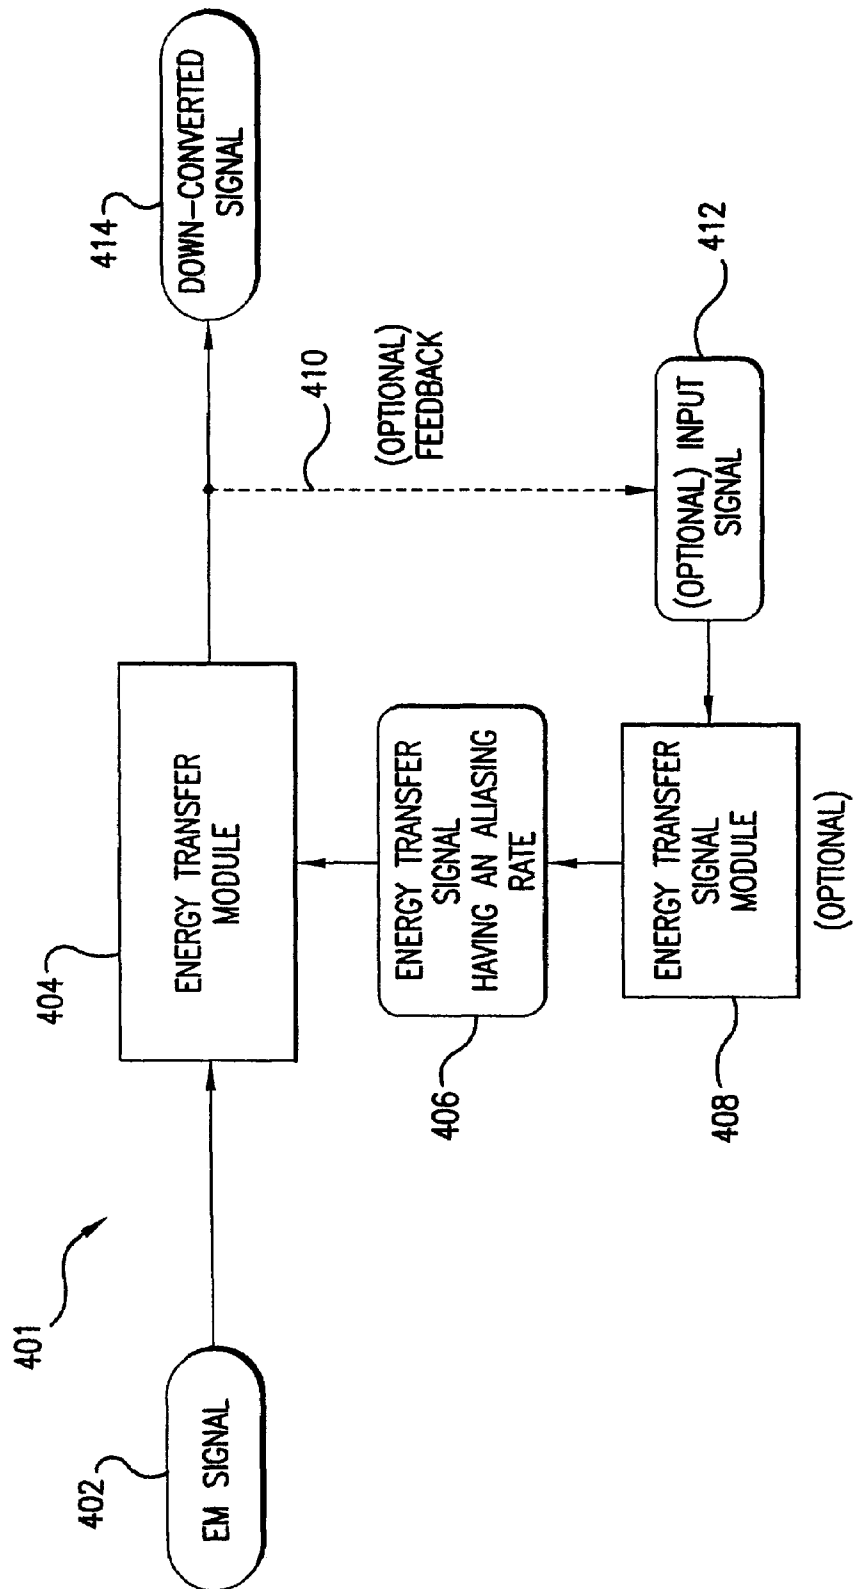


FIG.4

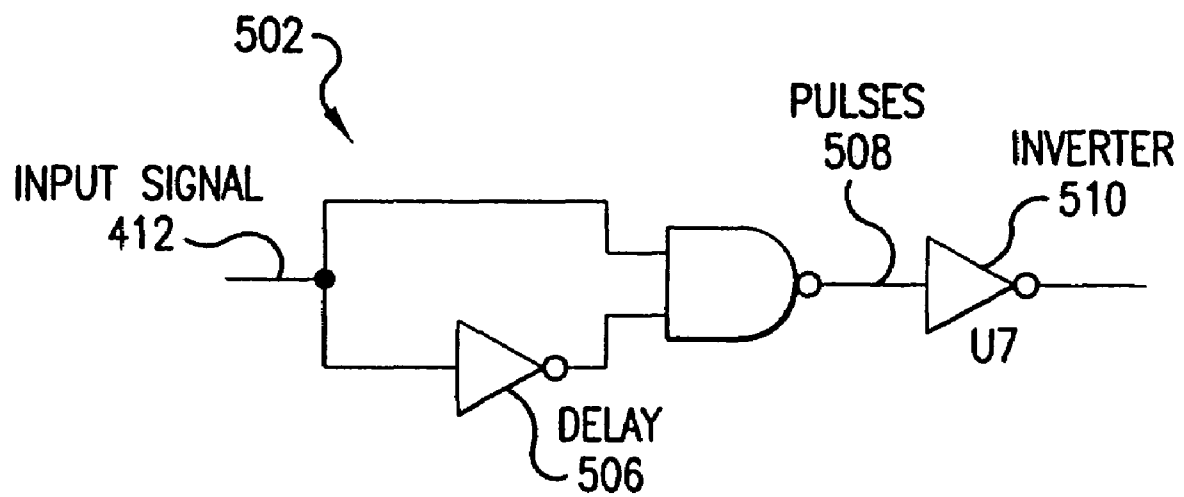


FIG.5

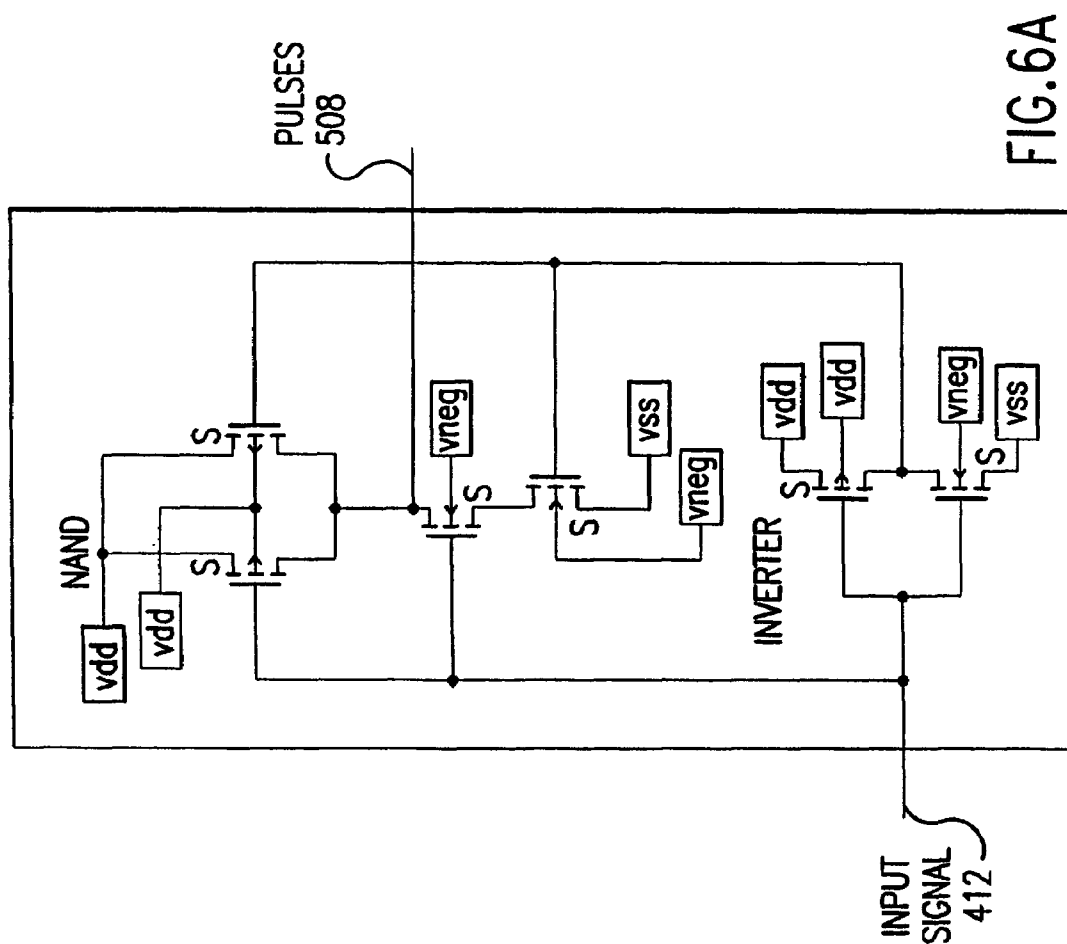


FIG. 6A

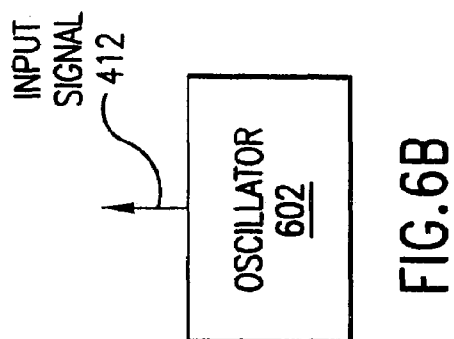


FIG. 6B

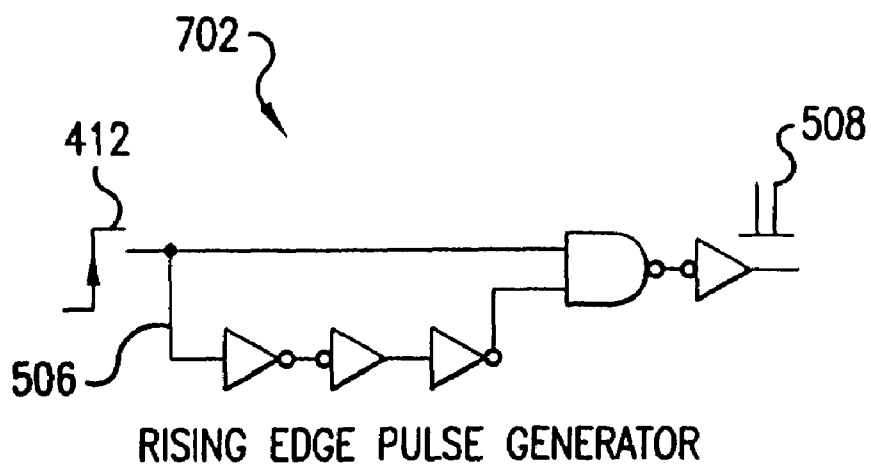


FIG.7A

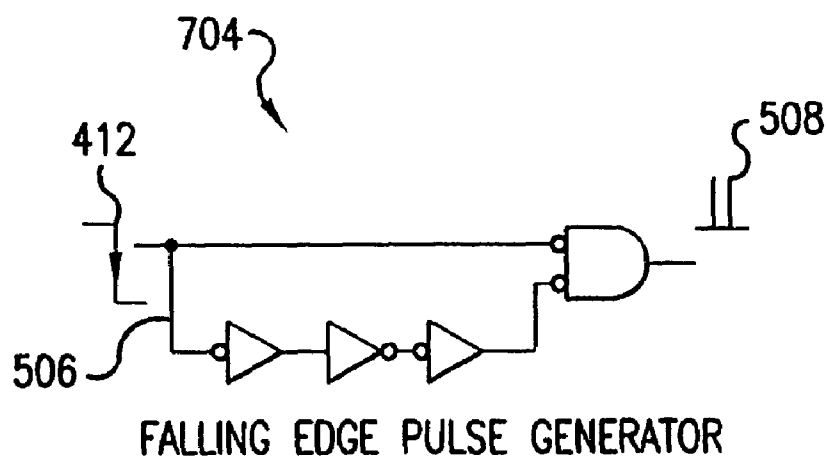


FIG.7B


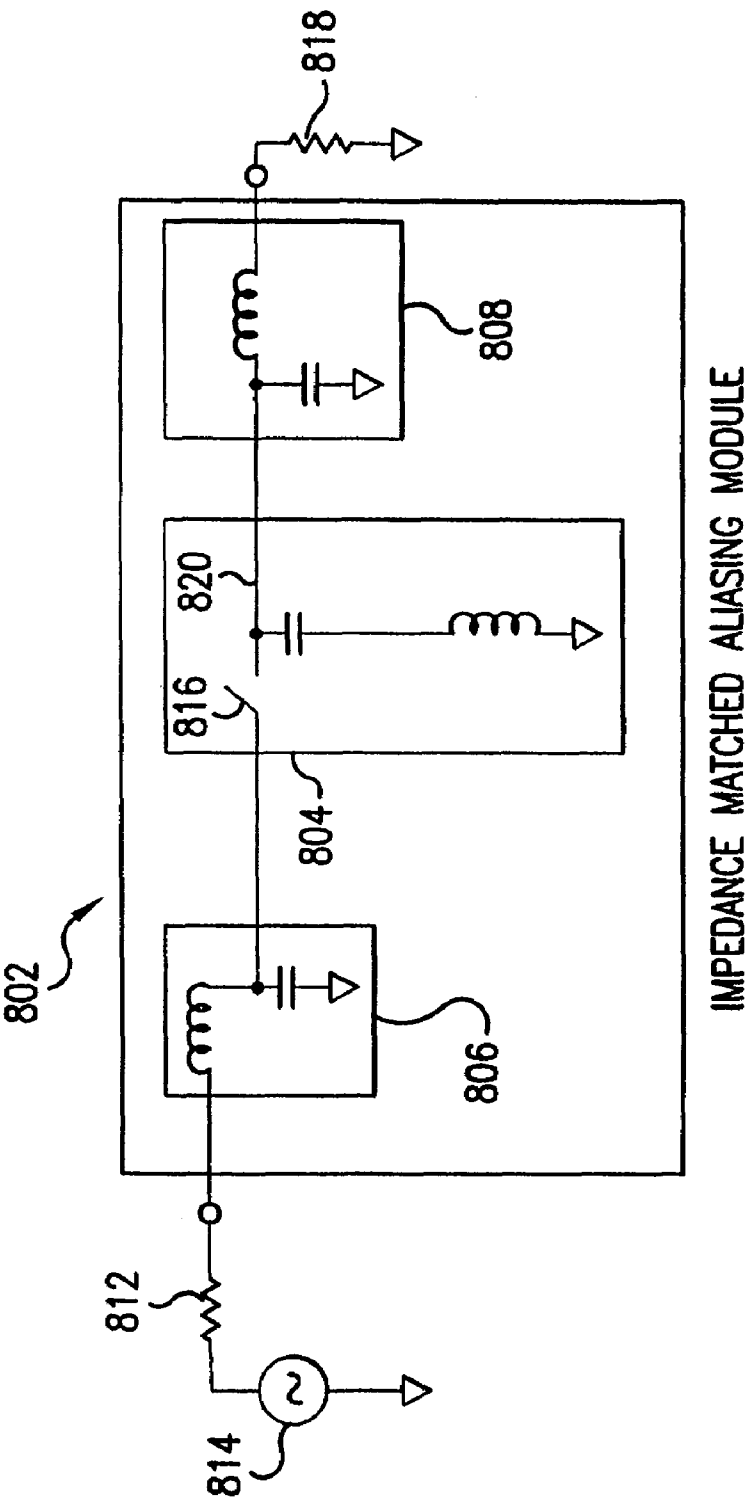


FIG.8

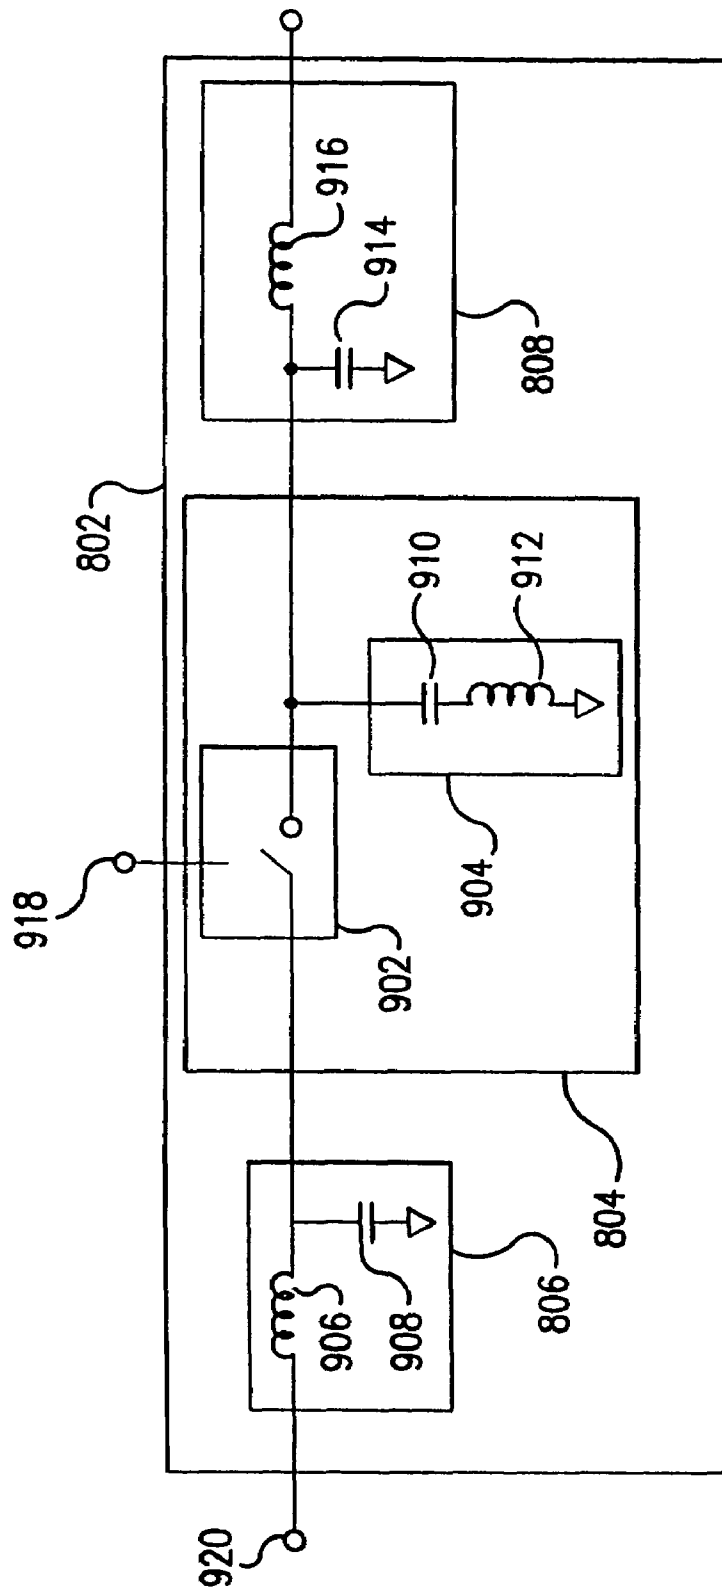

ALIASING MODULE

FIG. 9

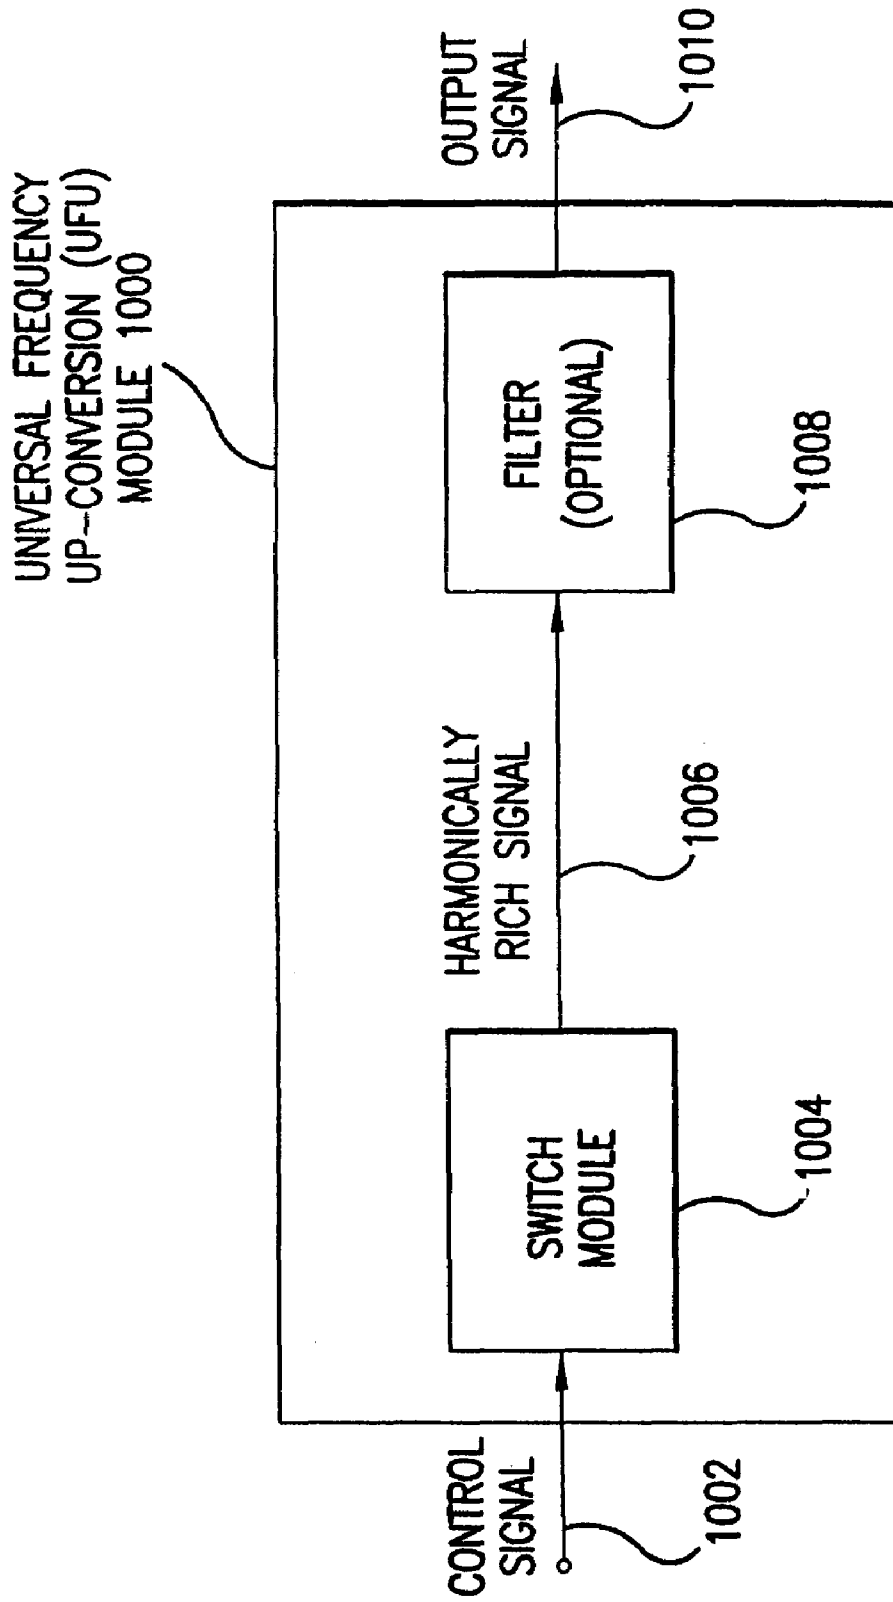


FIG.10

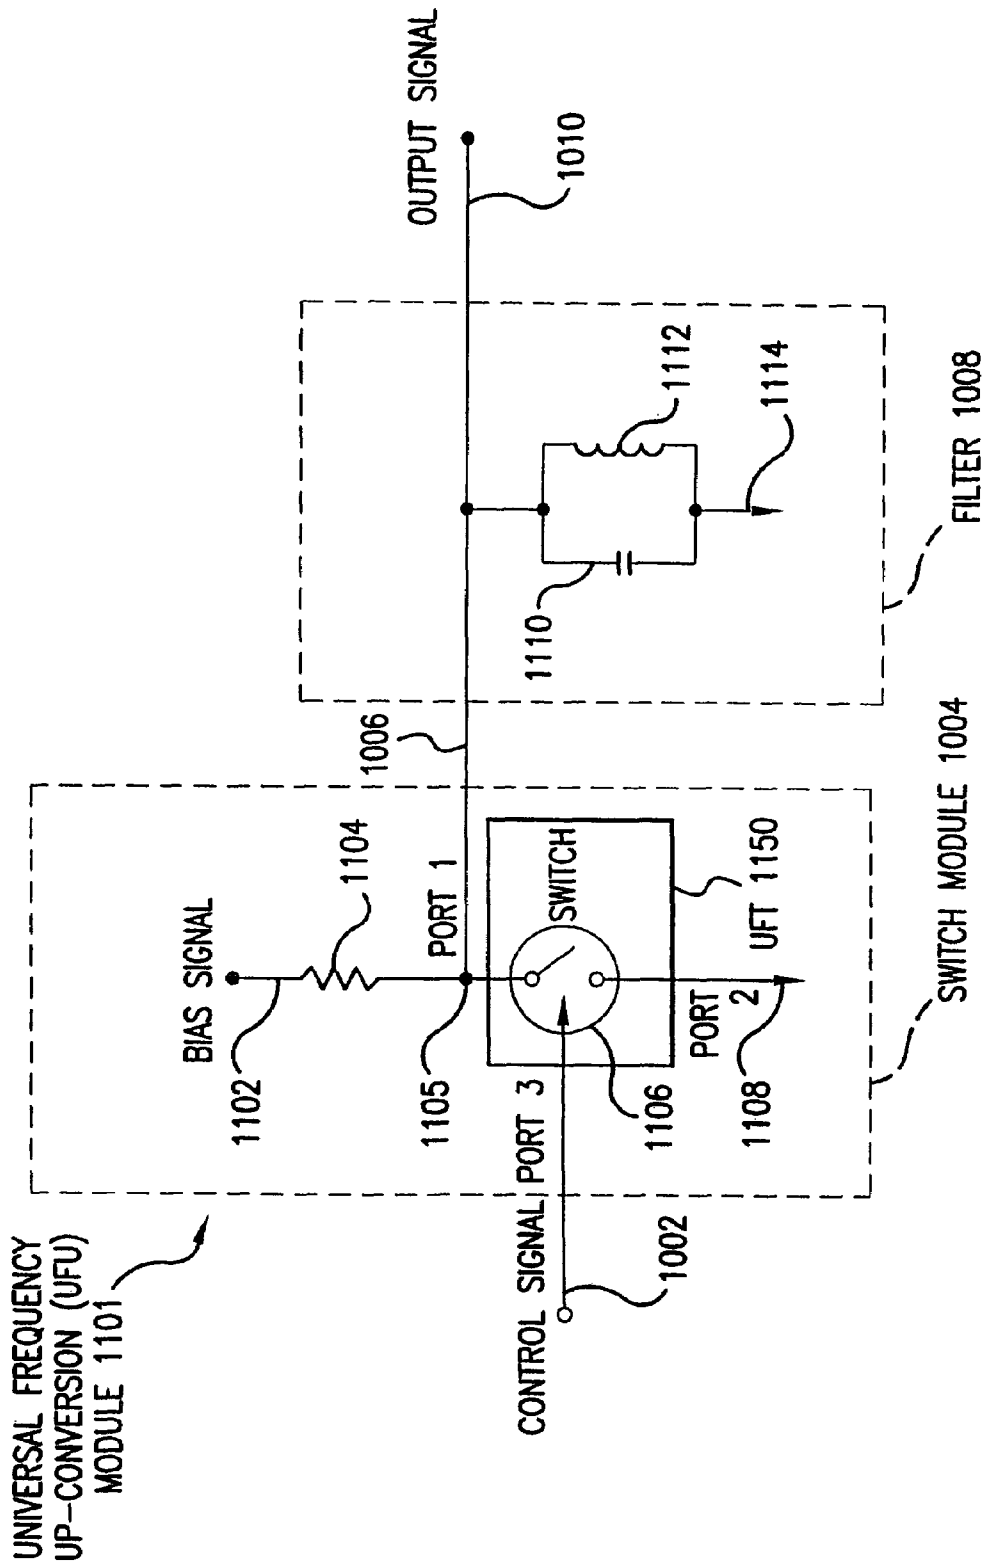


FIG.11





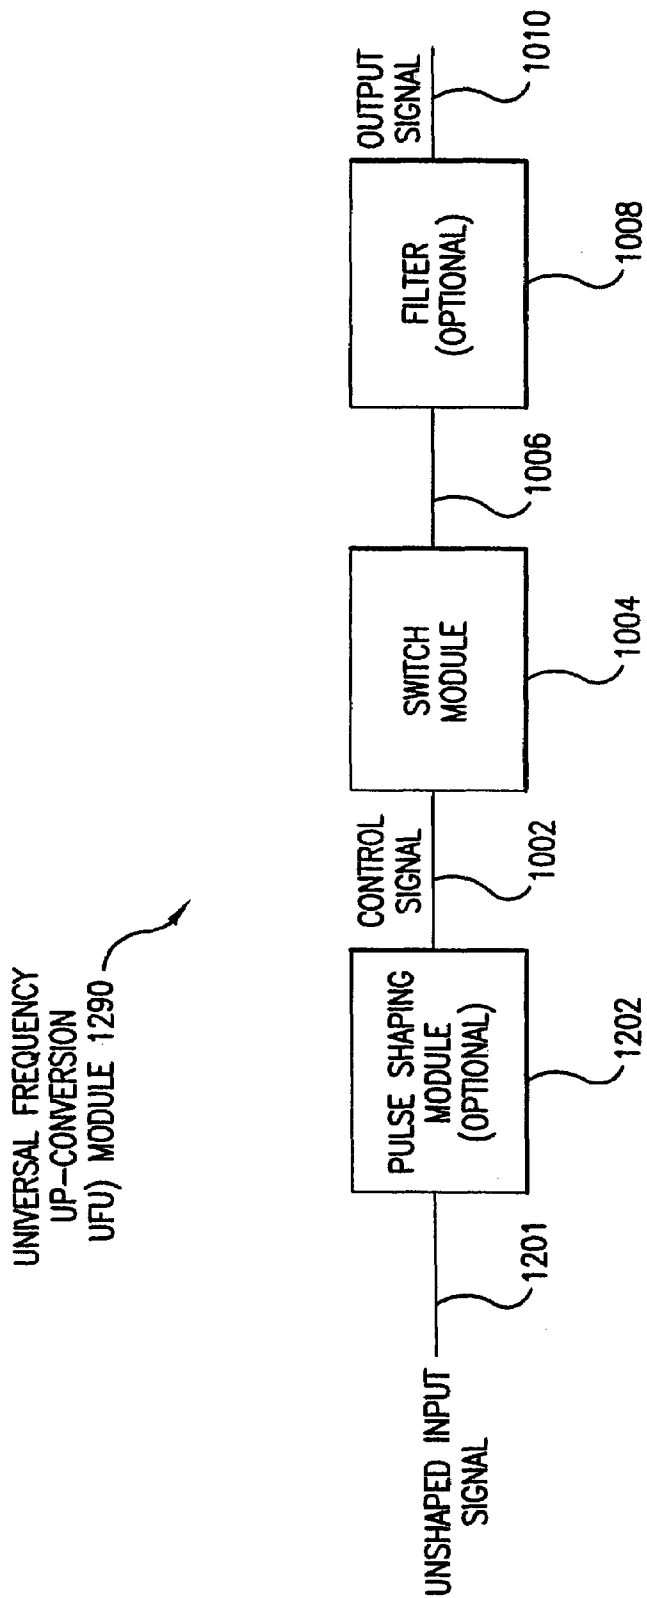


FIG.12

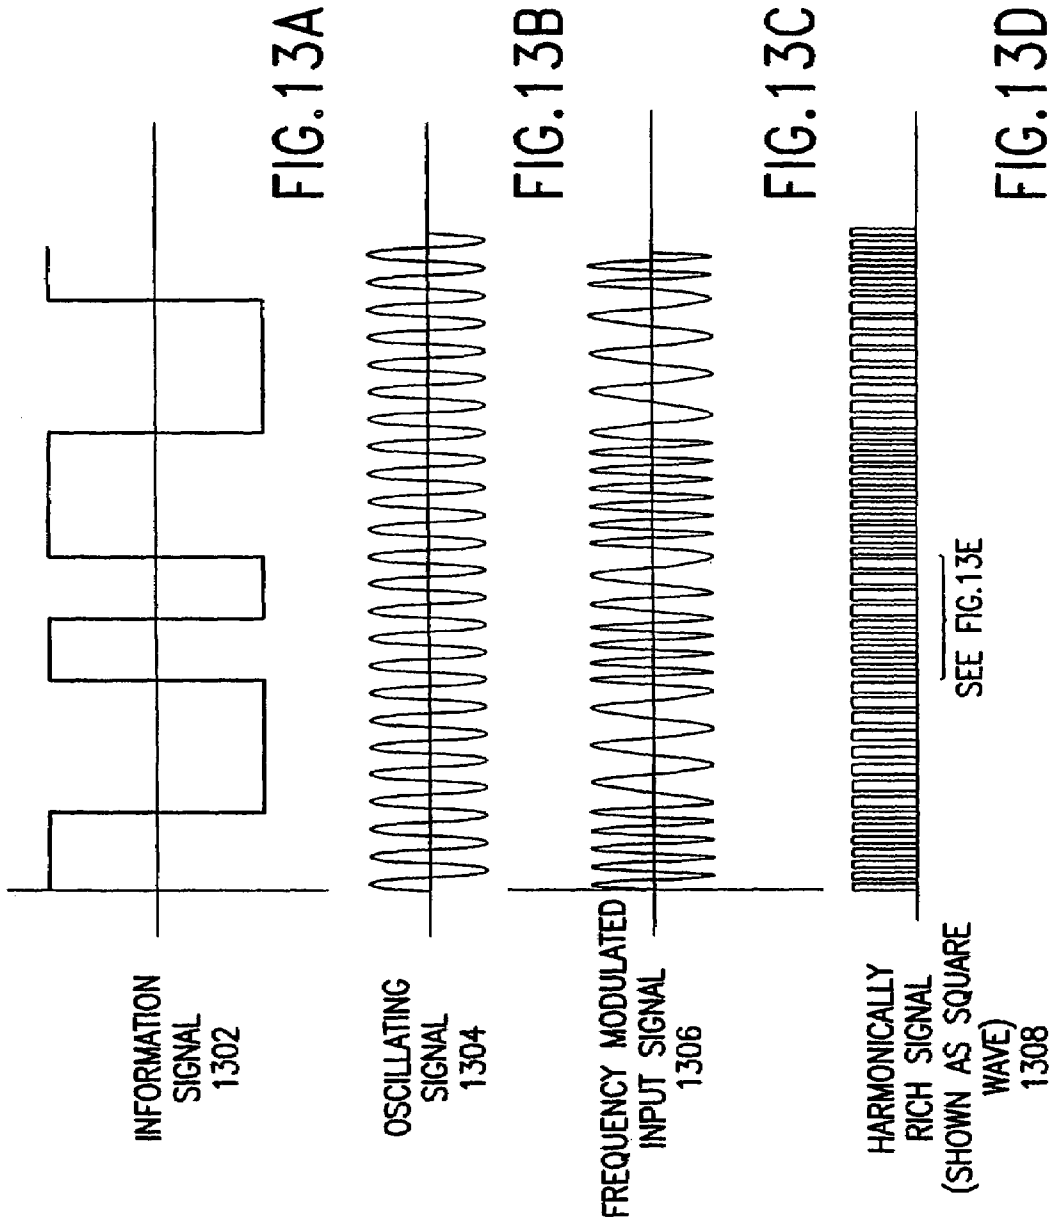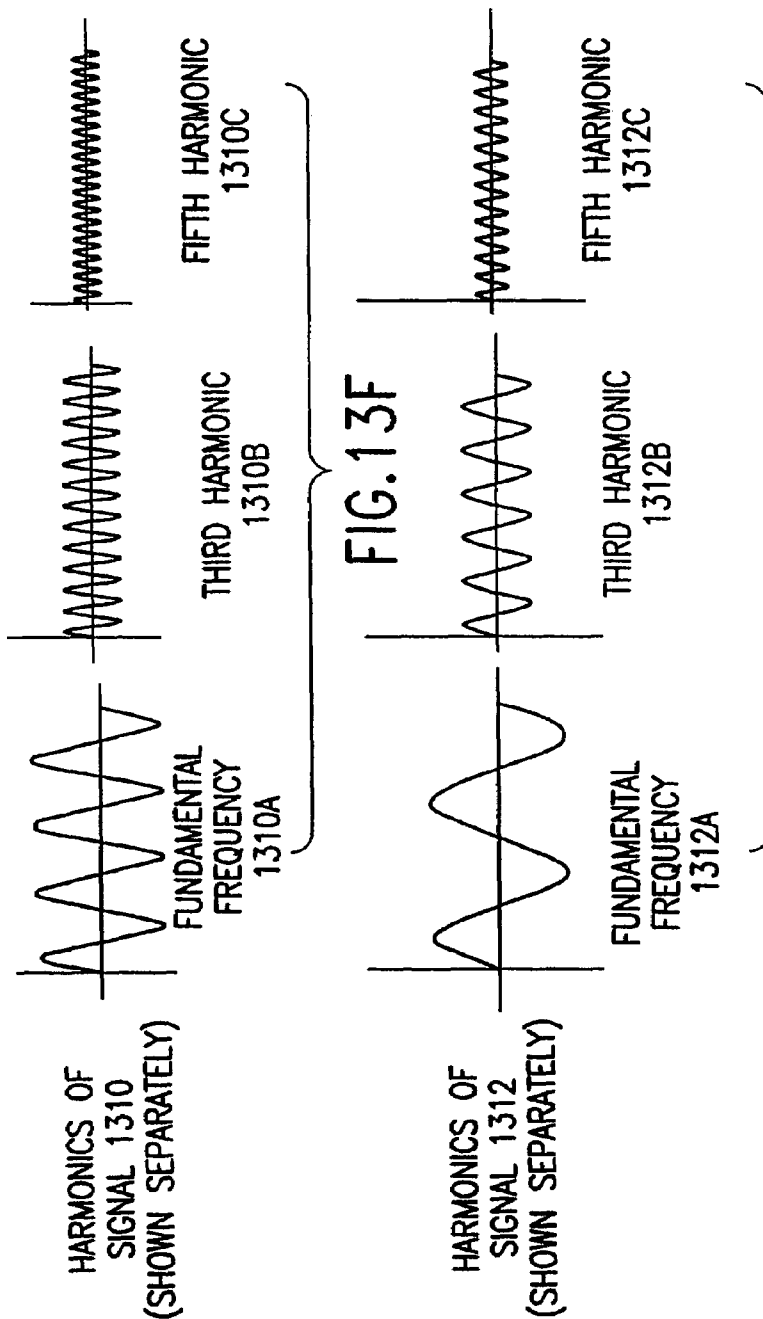


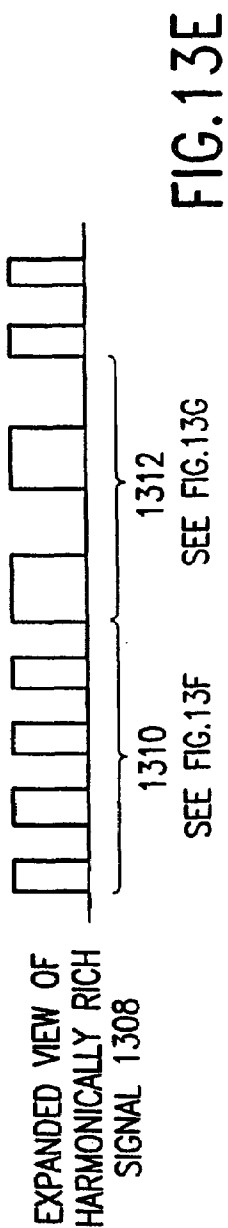

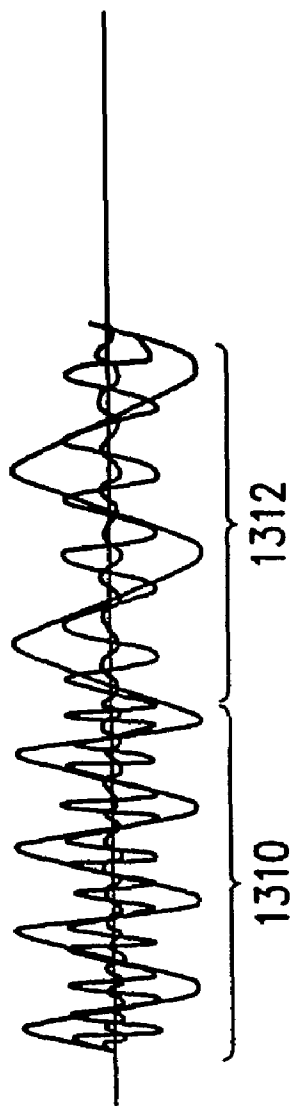

HARMONICS OF
SIGNALS 1310 AND
1312
(SHOWN SIMULTANEOUSLY
BUT NOT SUMMED)

FIG. 13H

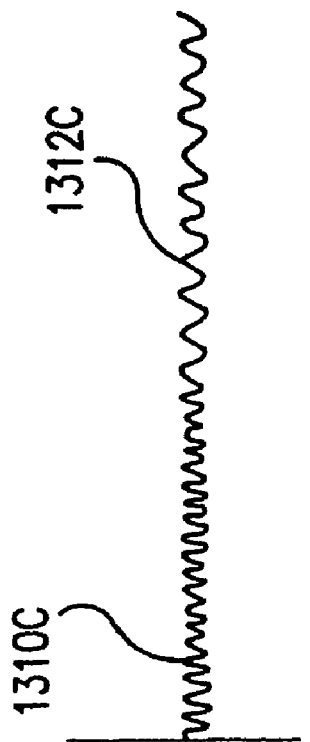

FILTERED
OUTPUT
SIGNAL
1314

FIG. 13I

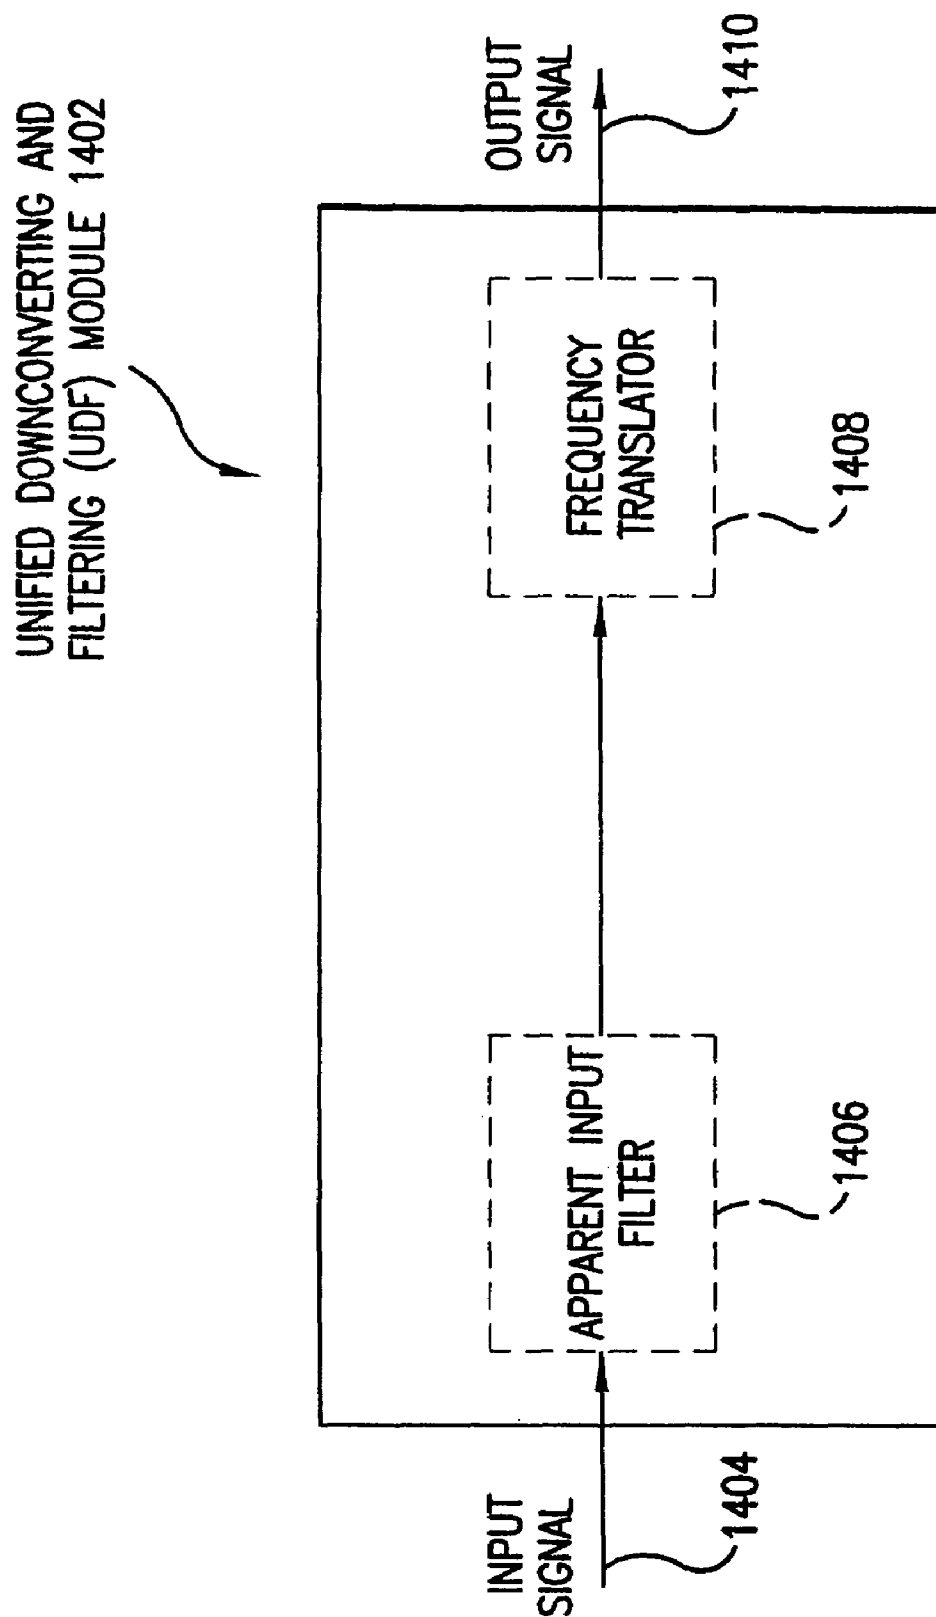


FIG.14

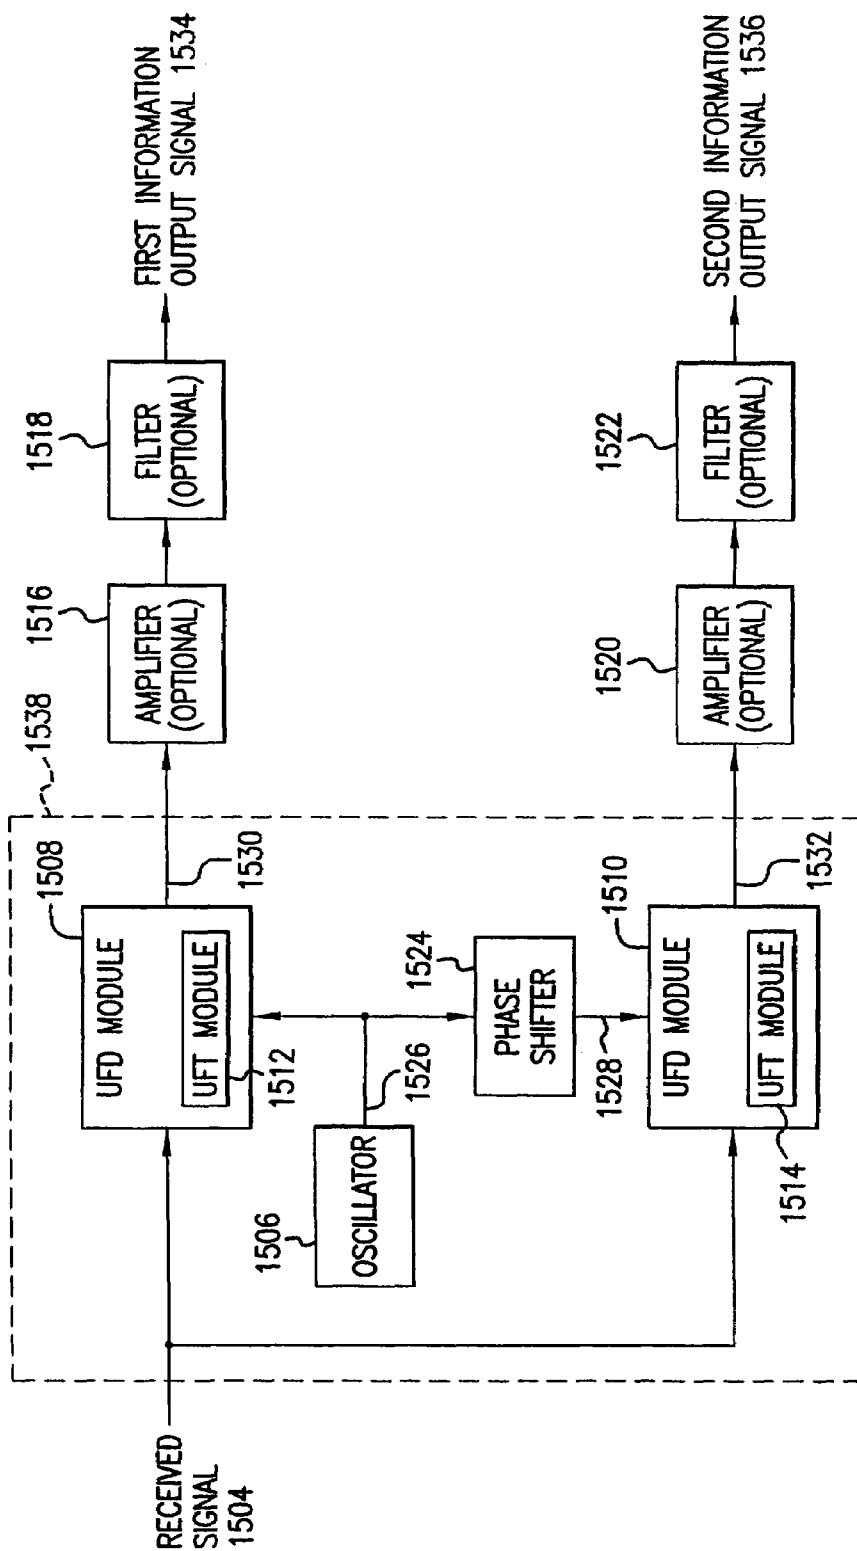
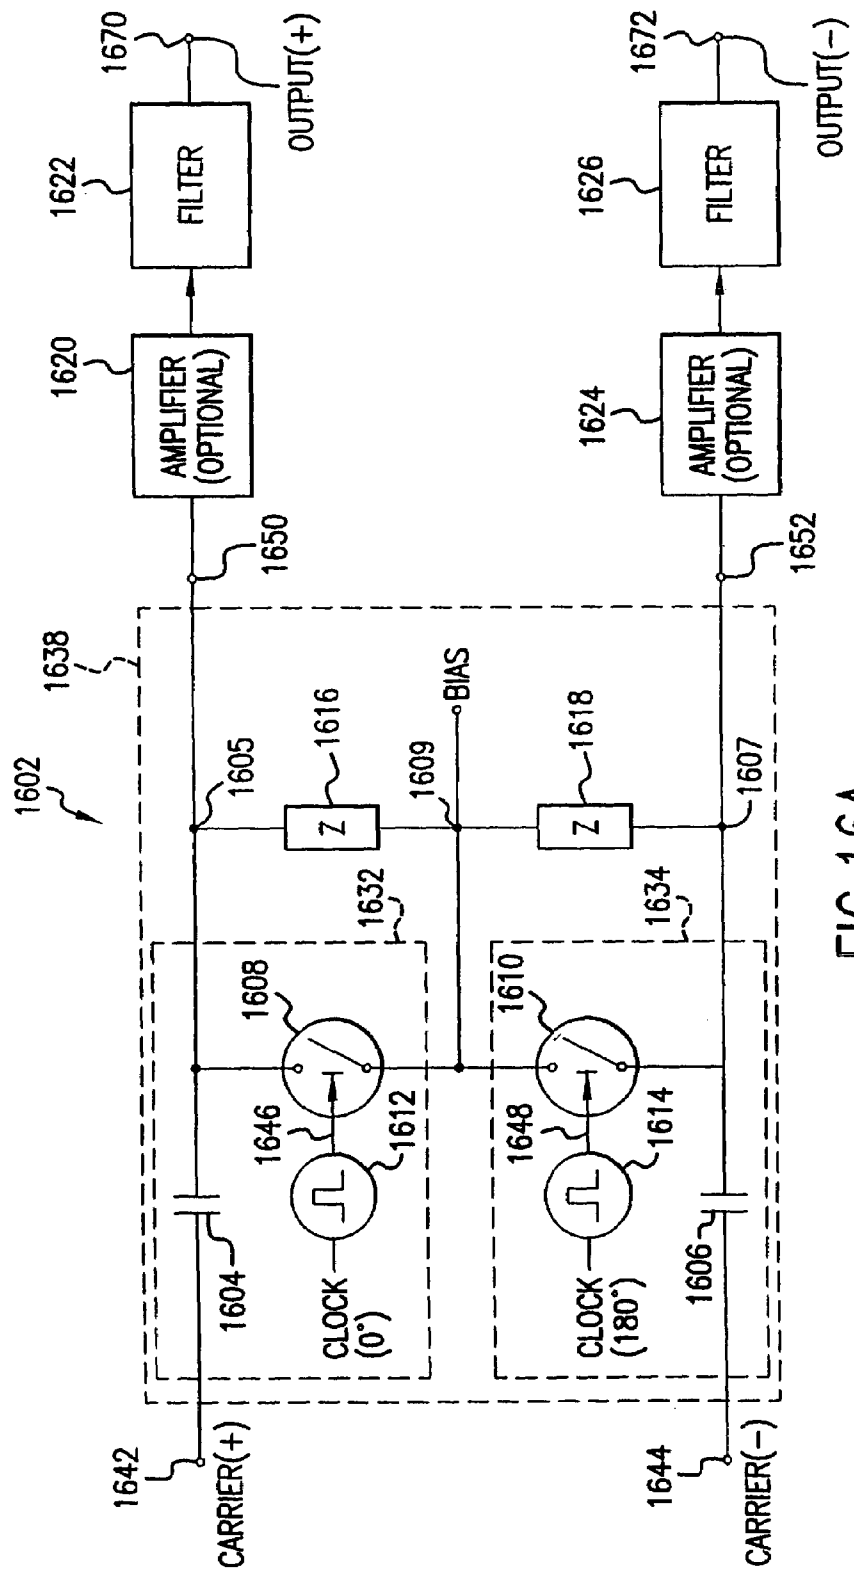


FIG. 15



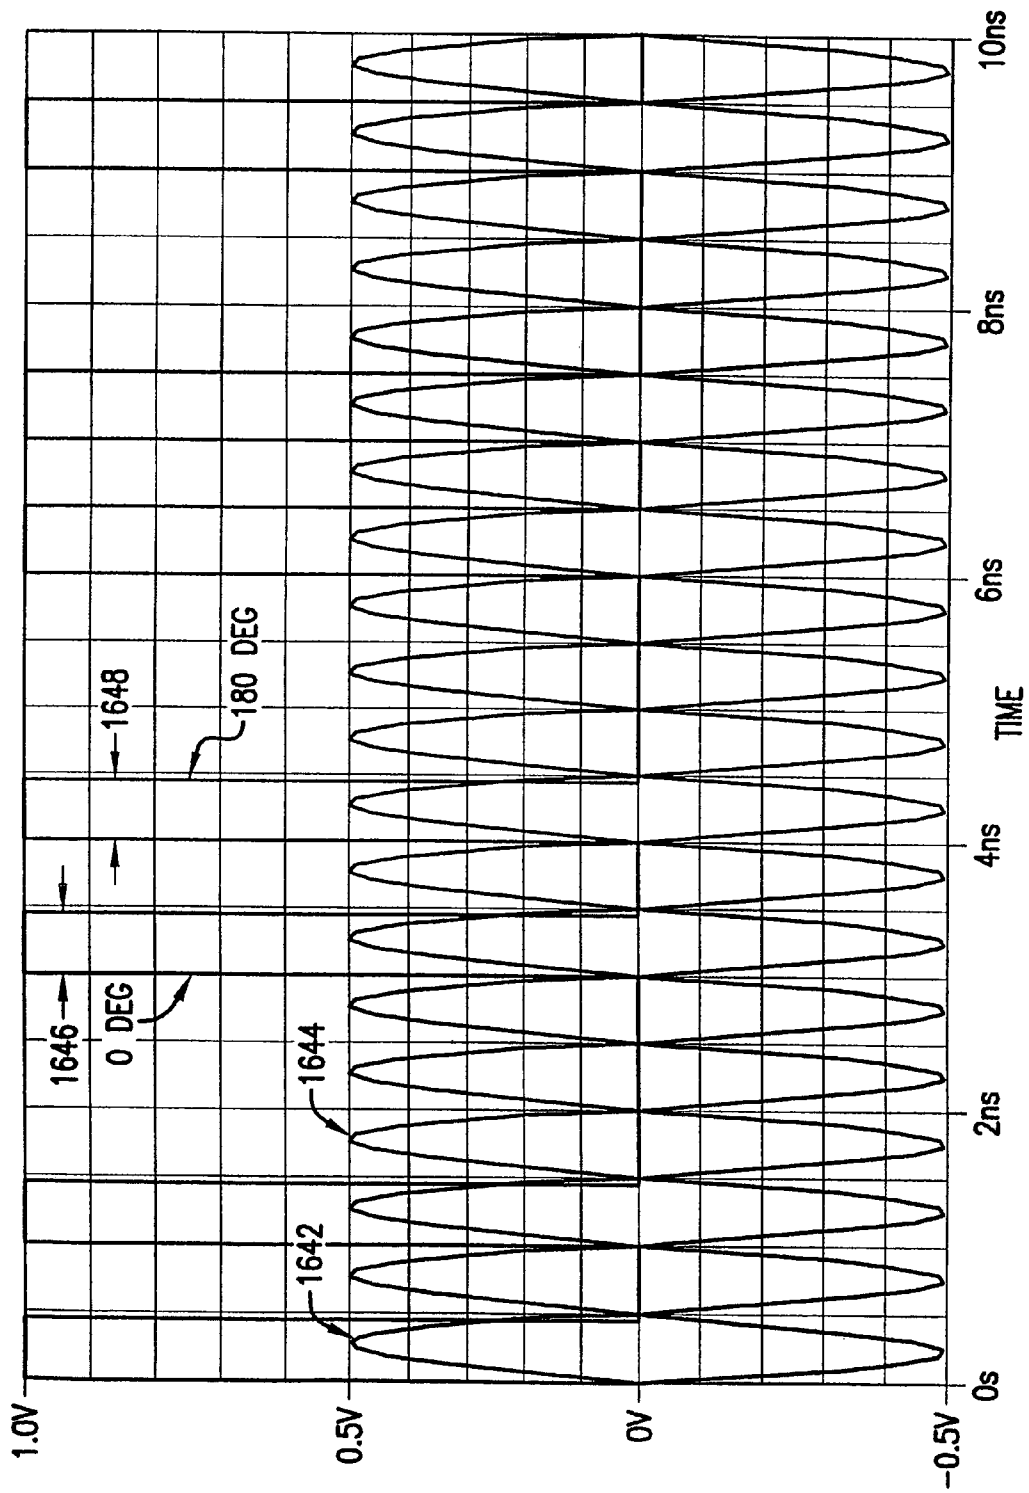


FIG. 16B

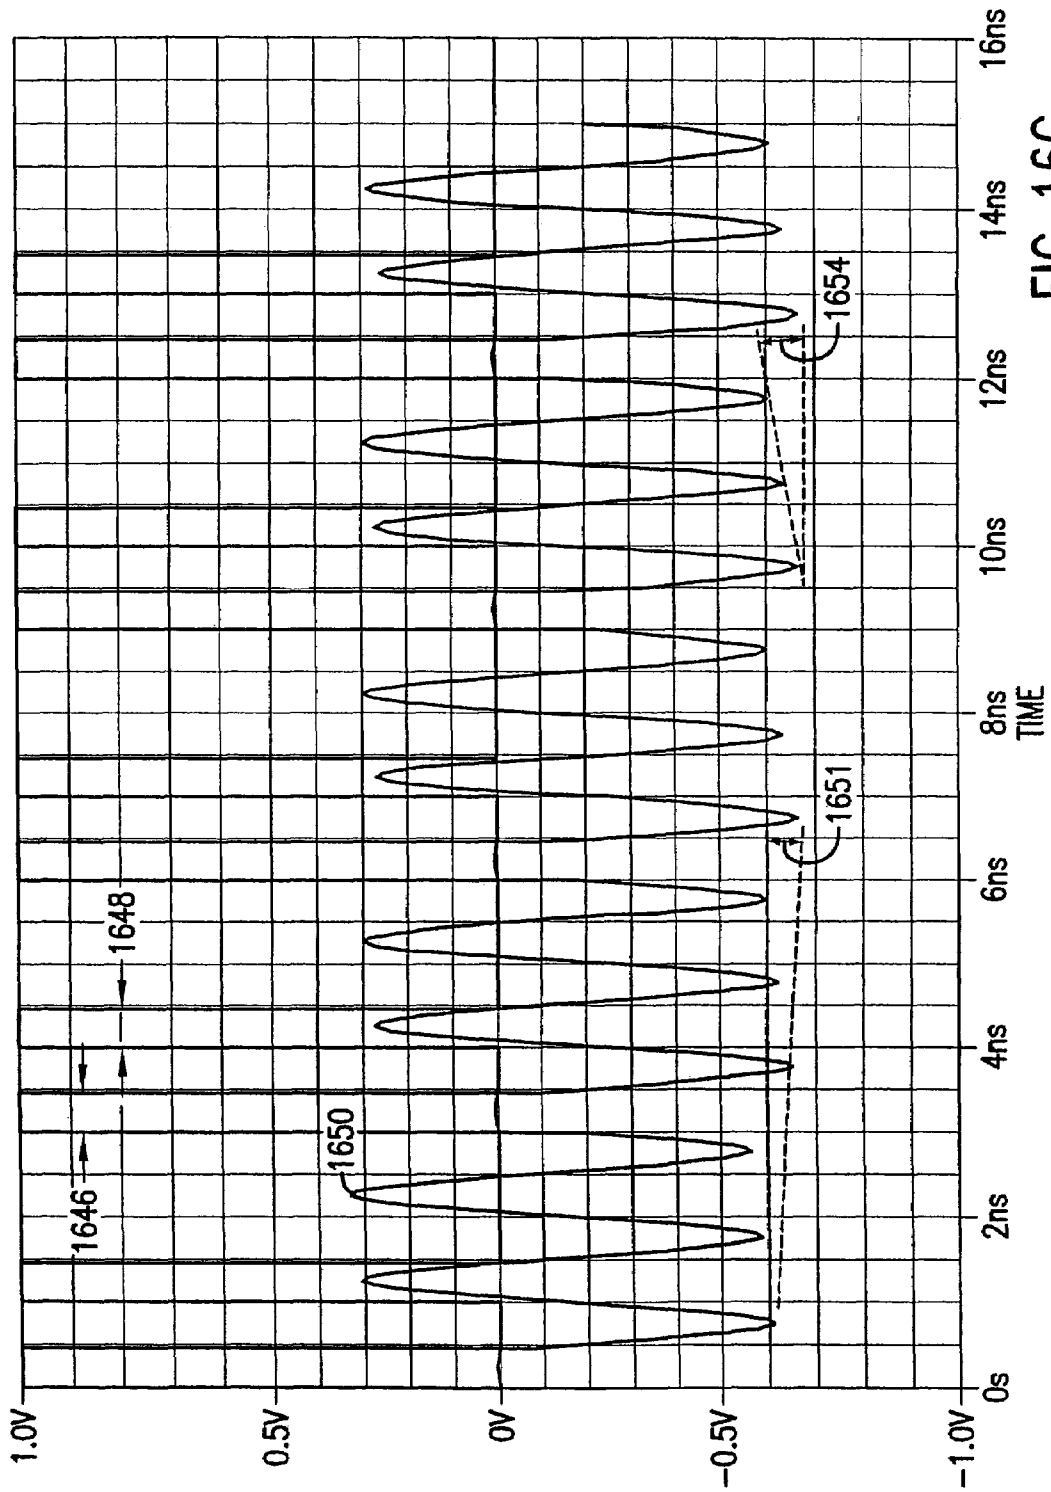


FIG. 16C

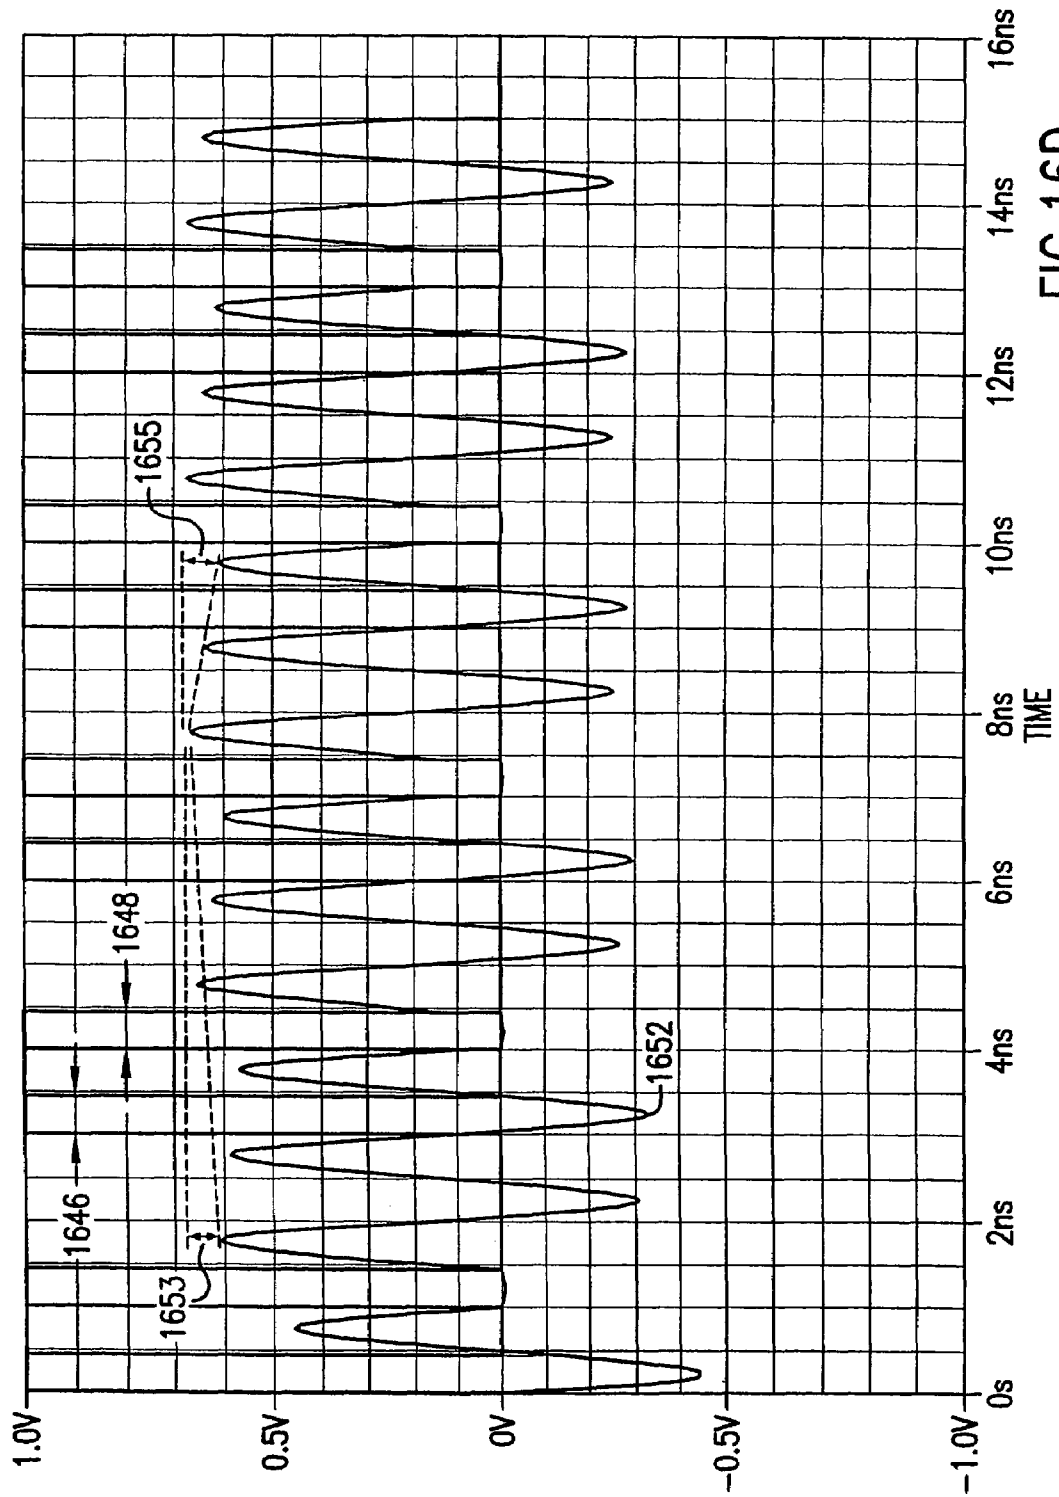


FIG. 16D

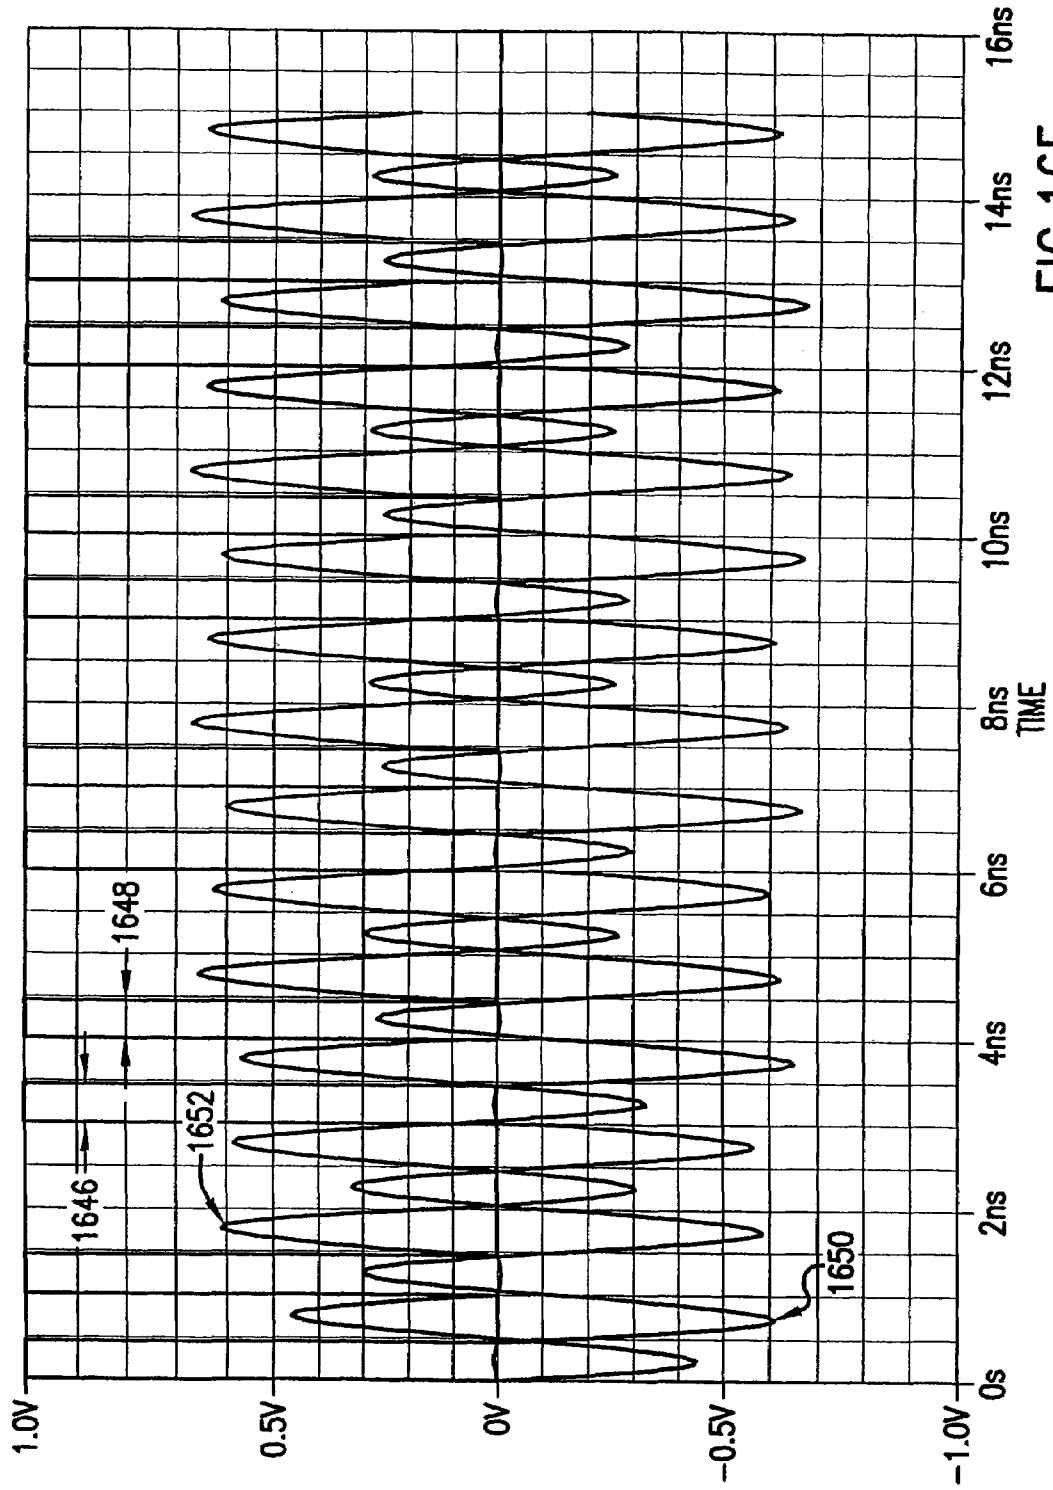


FIG. 16E

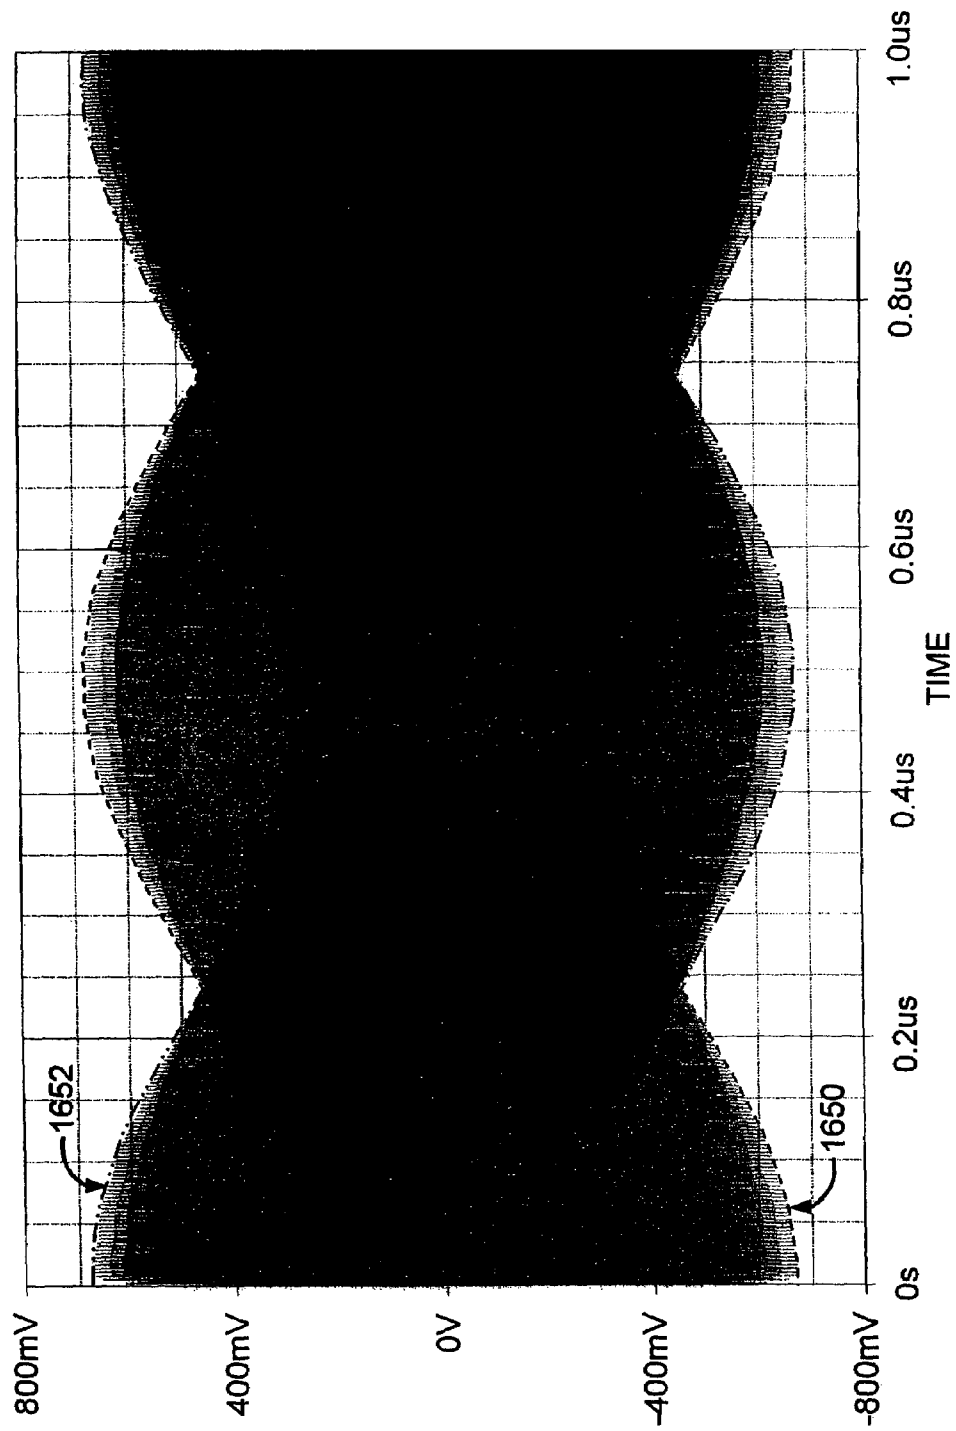


FIG. 16F

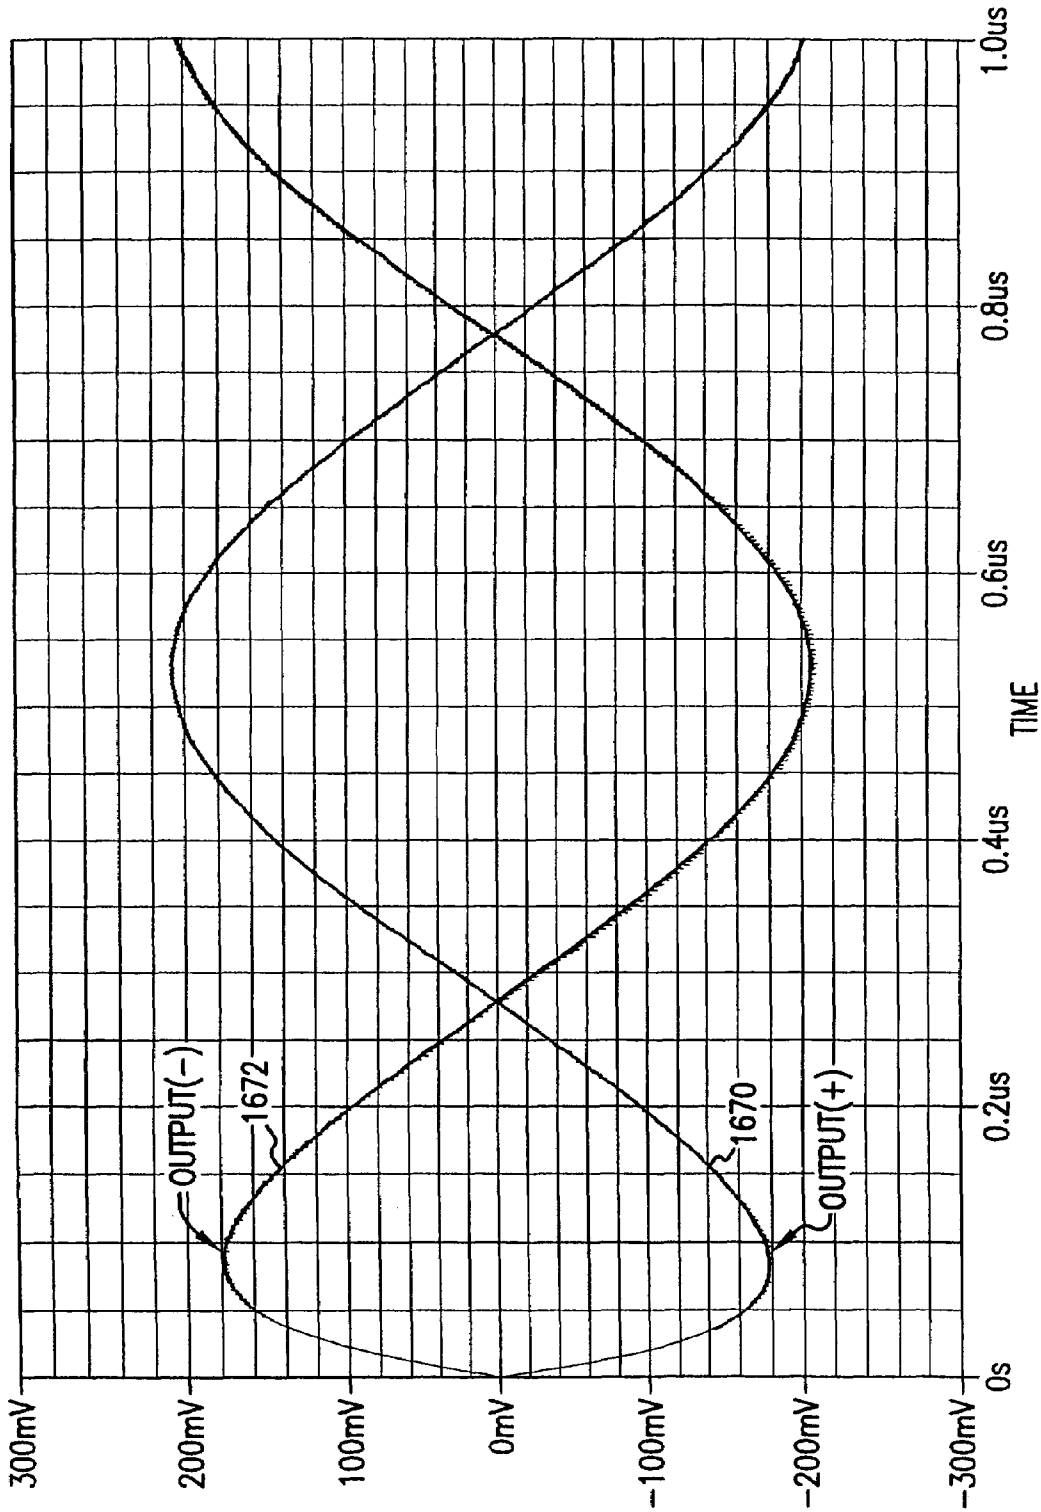


FIG. 16G

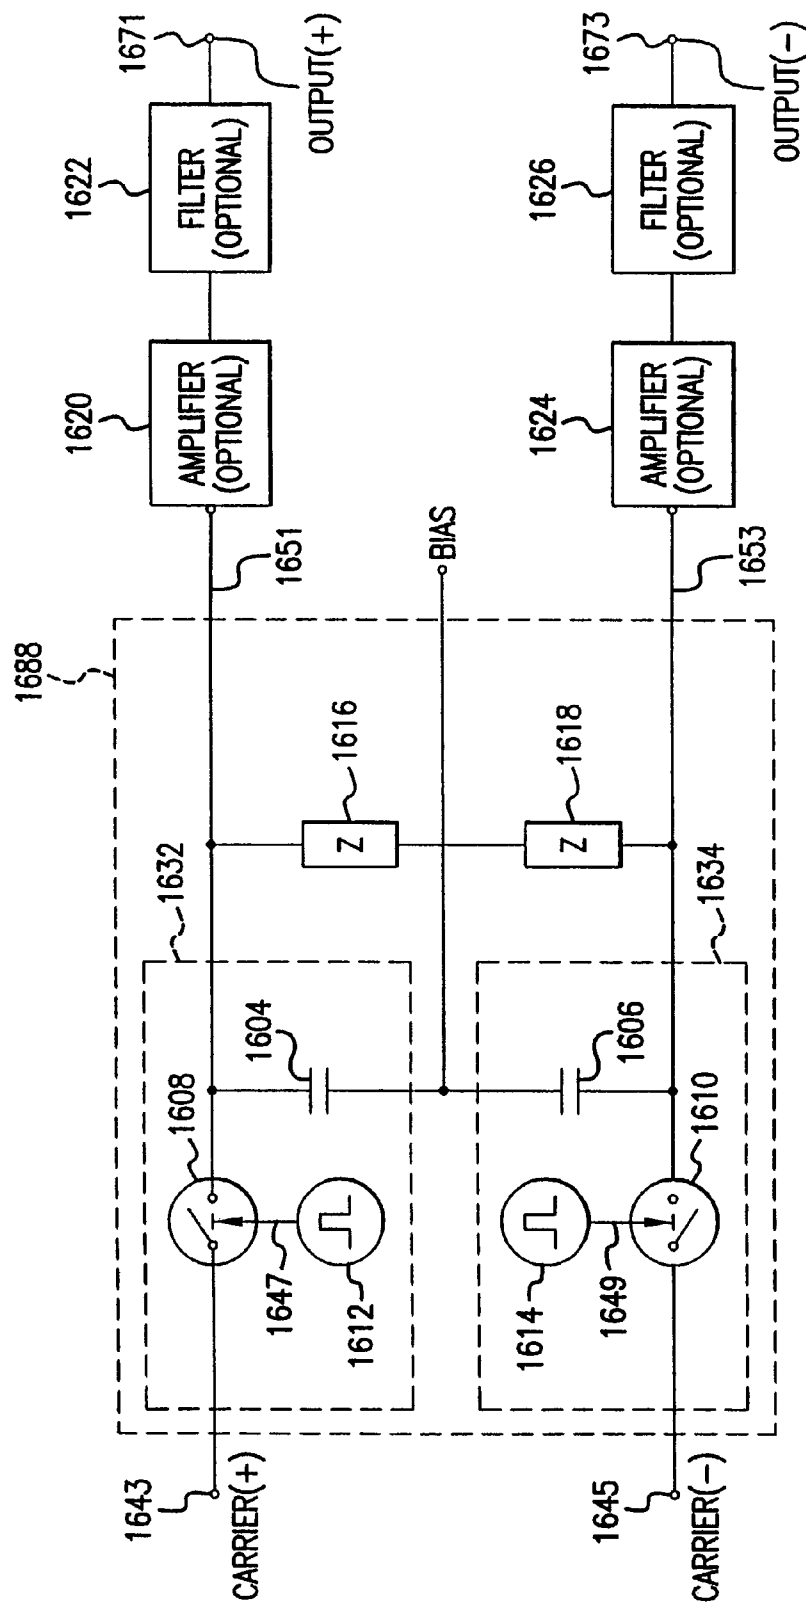
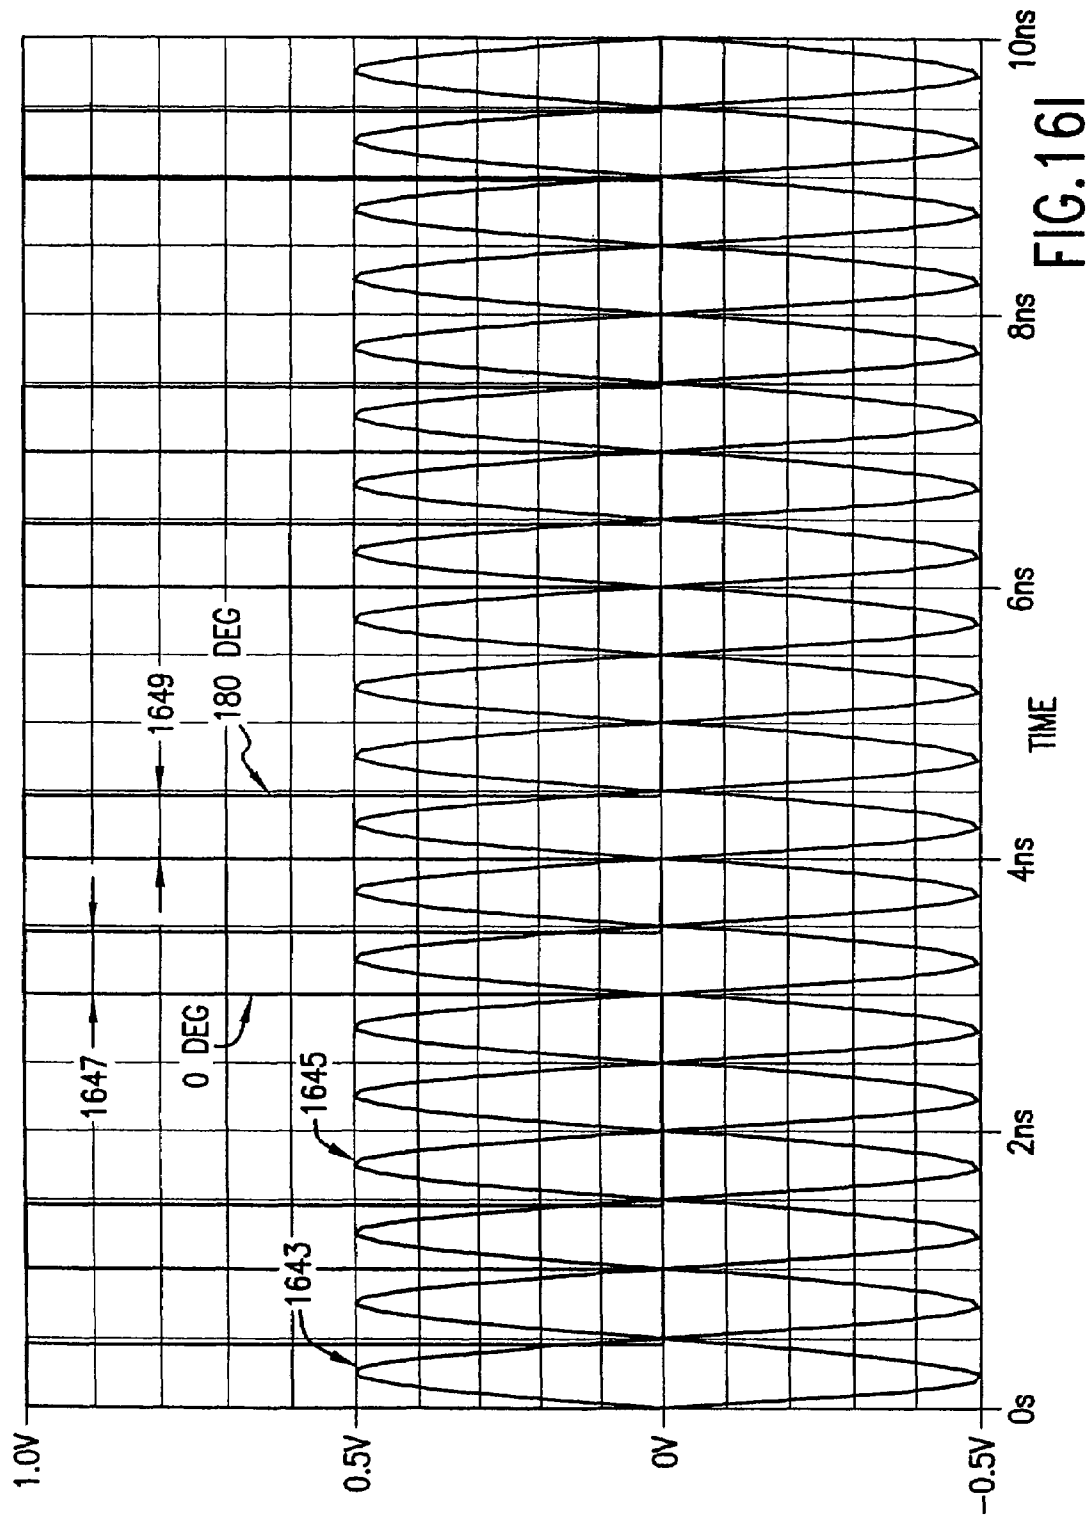


FIG. 16H



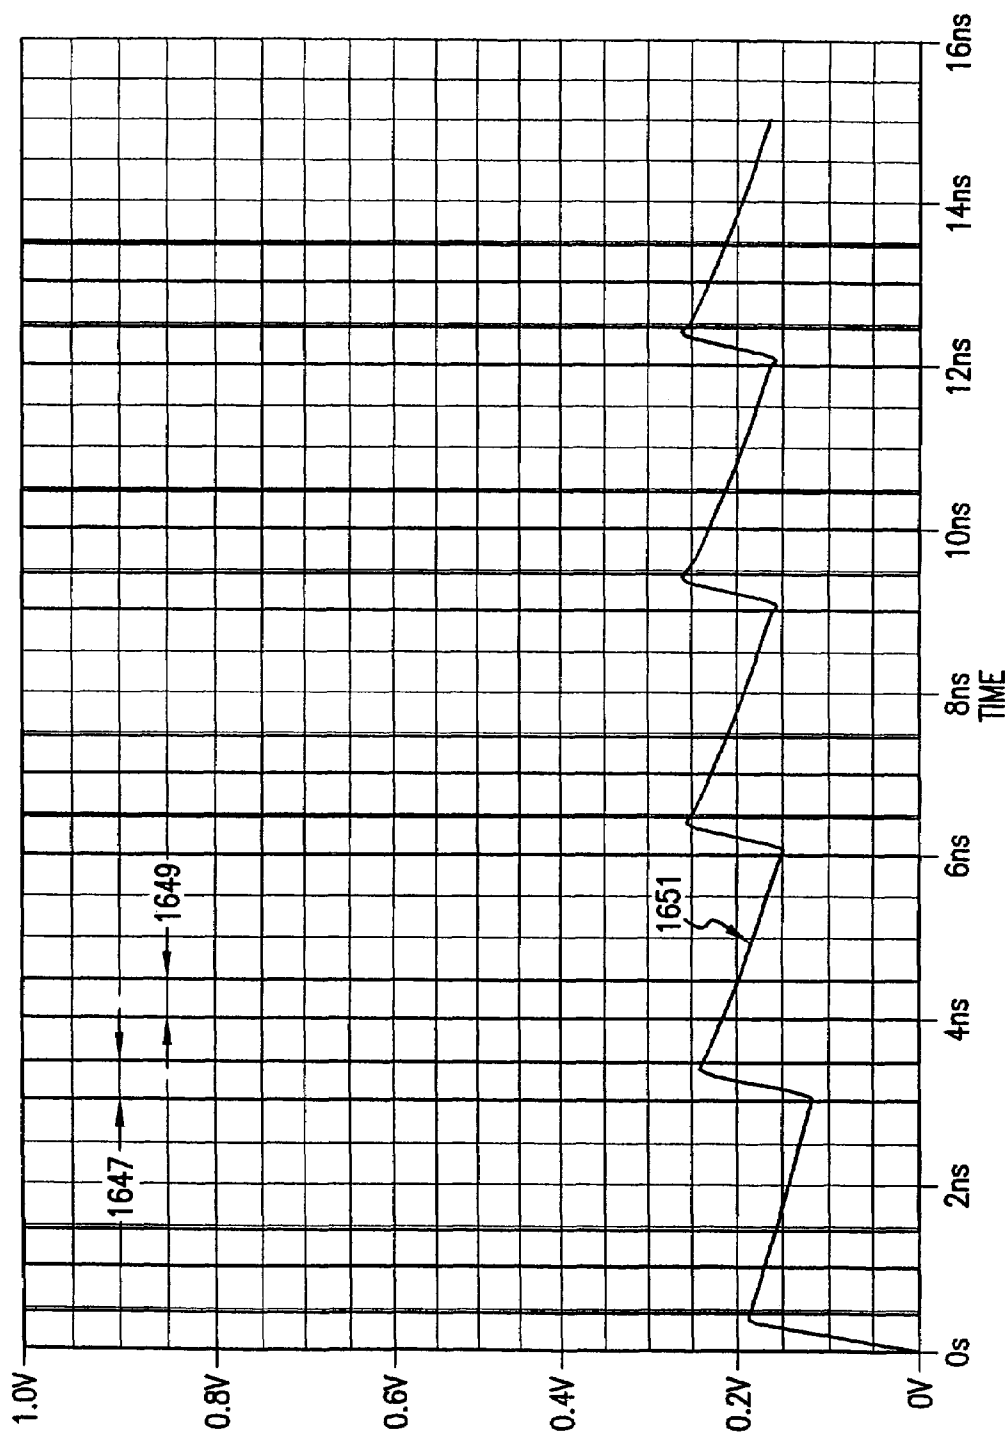


FIG. 16J

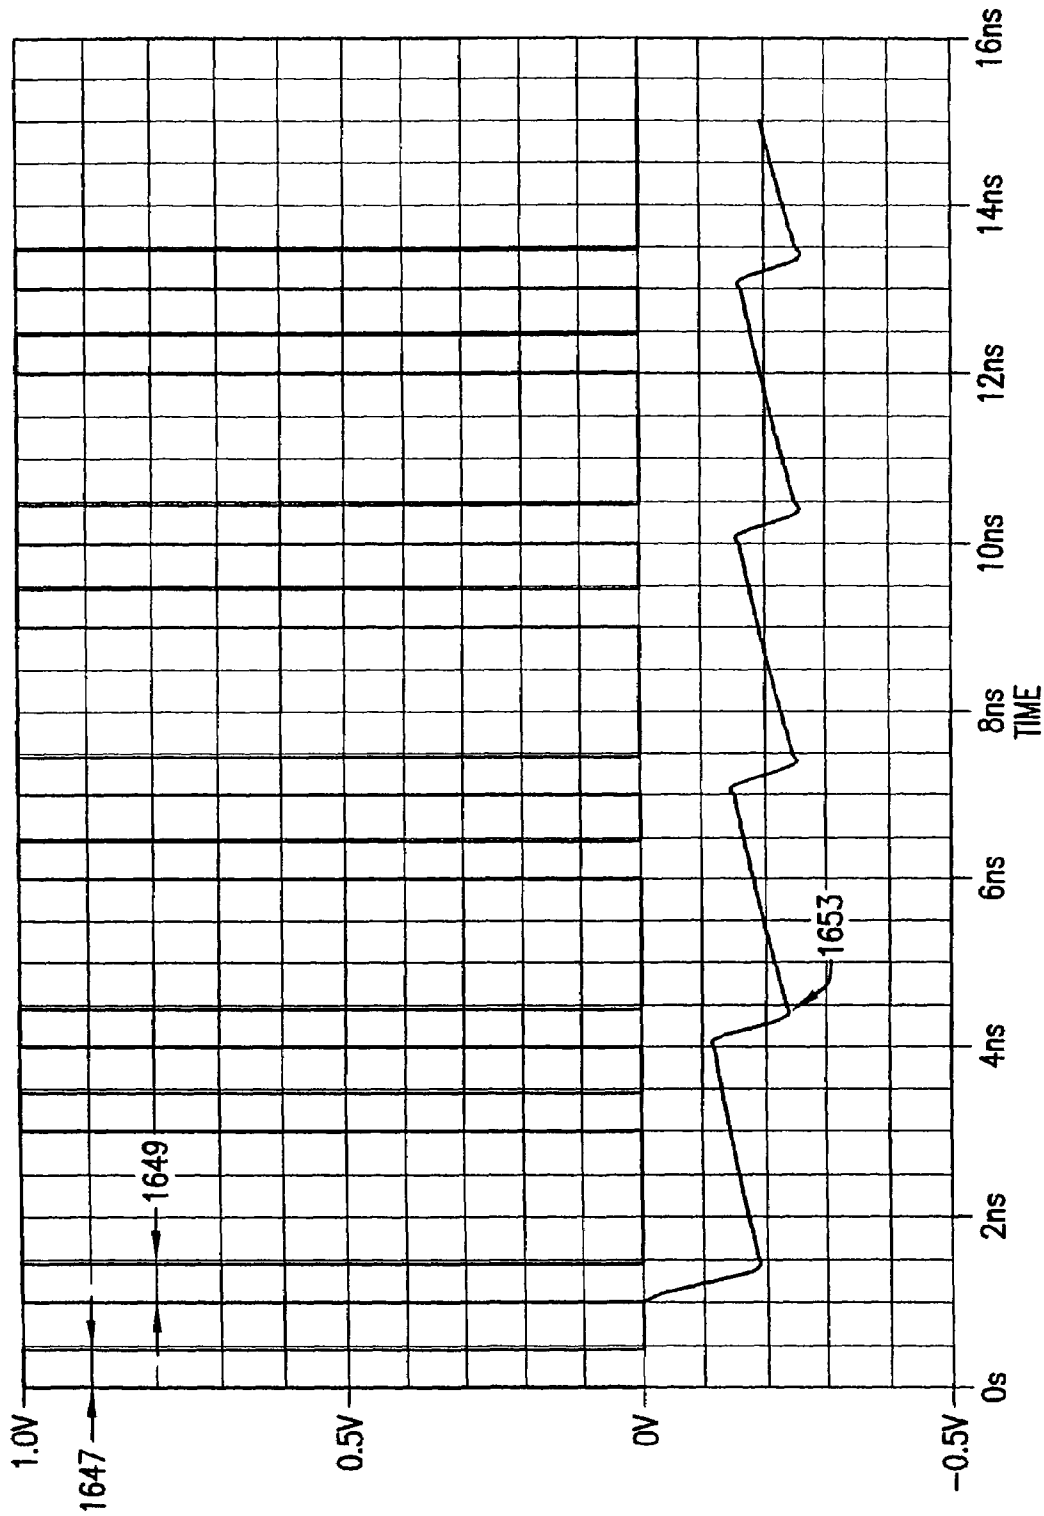


FIG. 16K

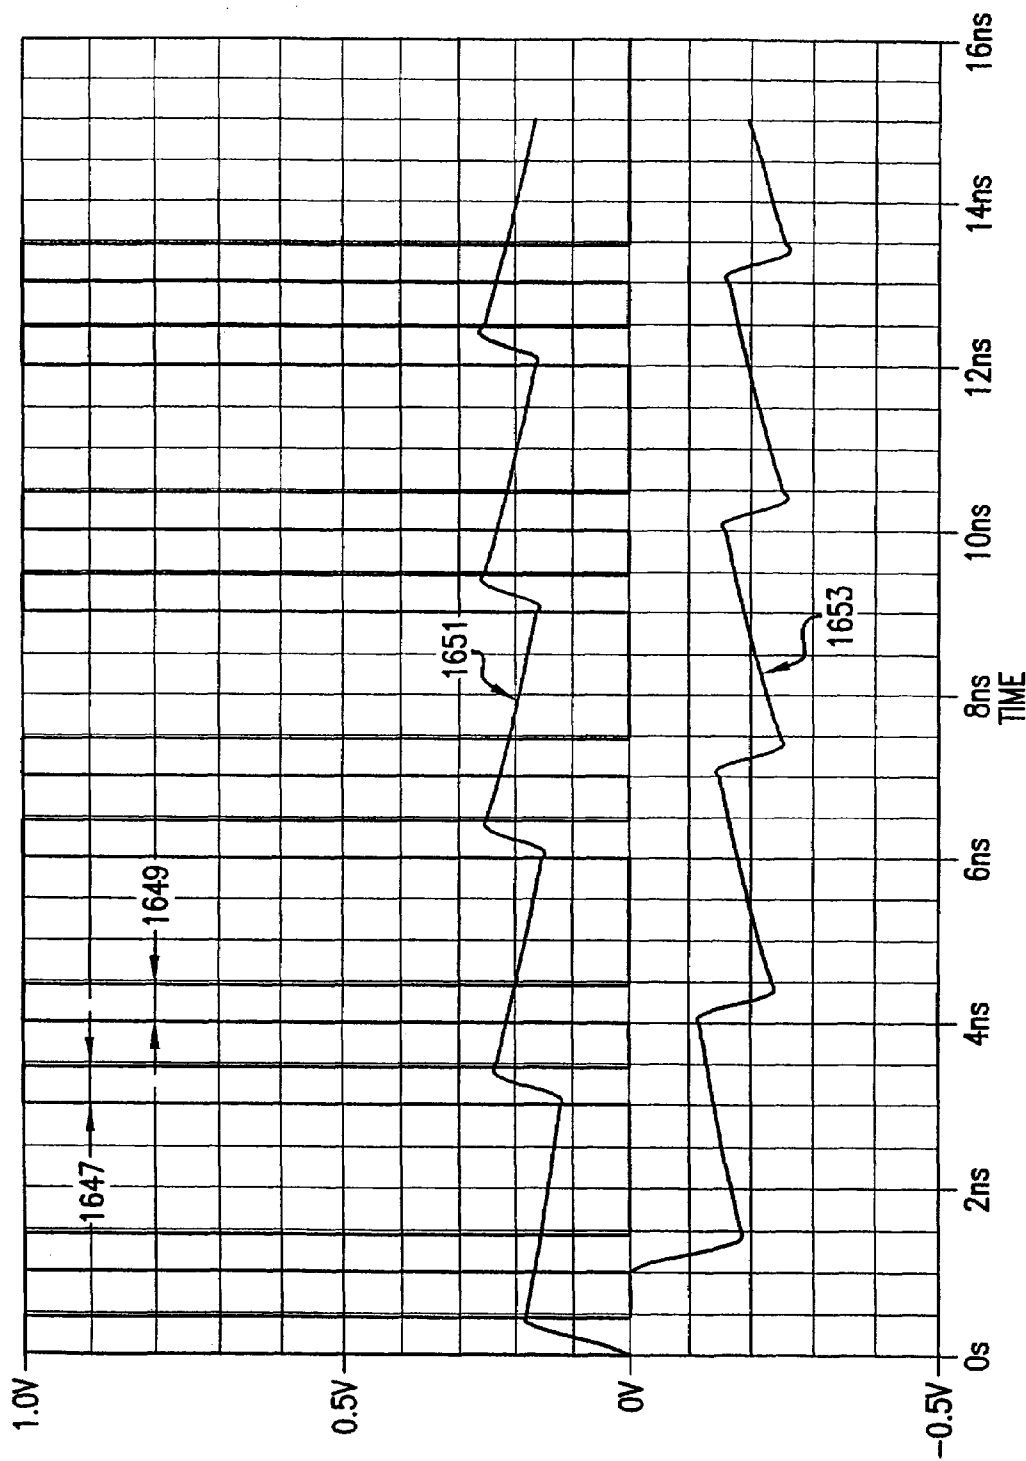


FIG. 16L

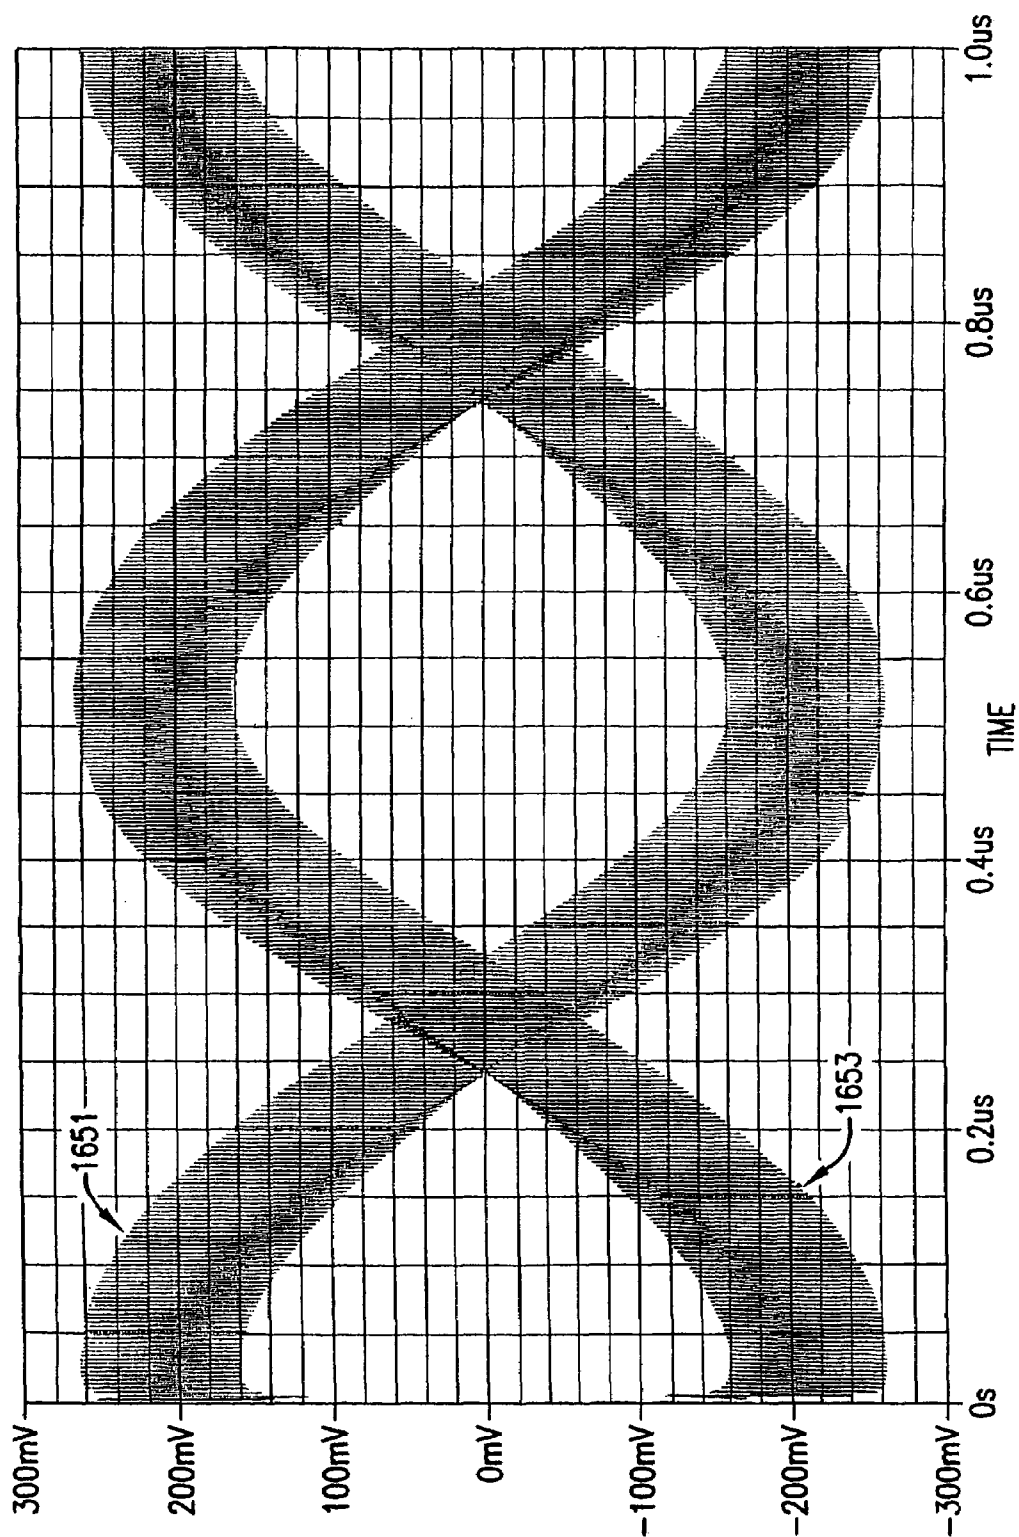


FIG. 16M

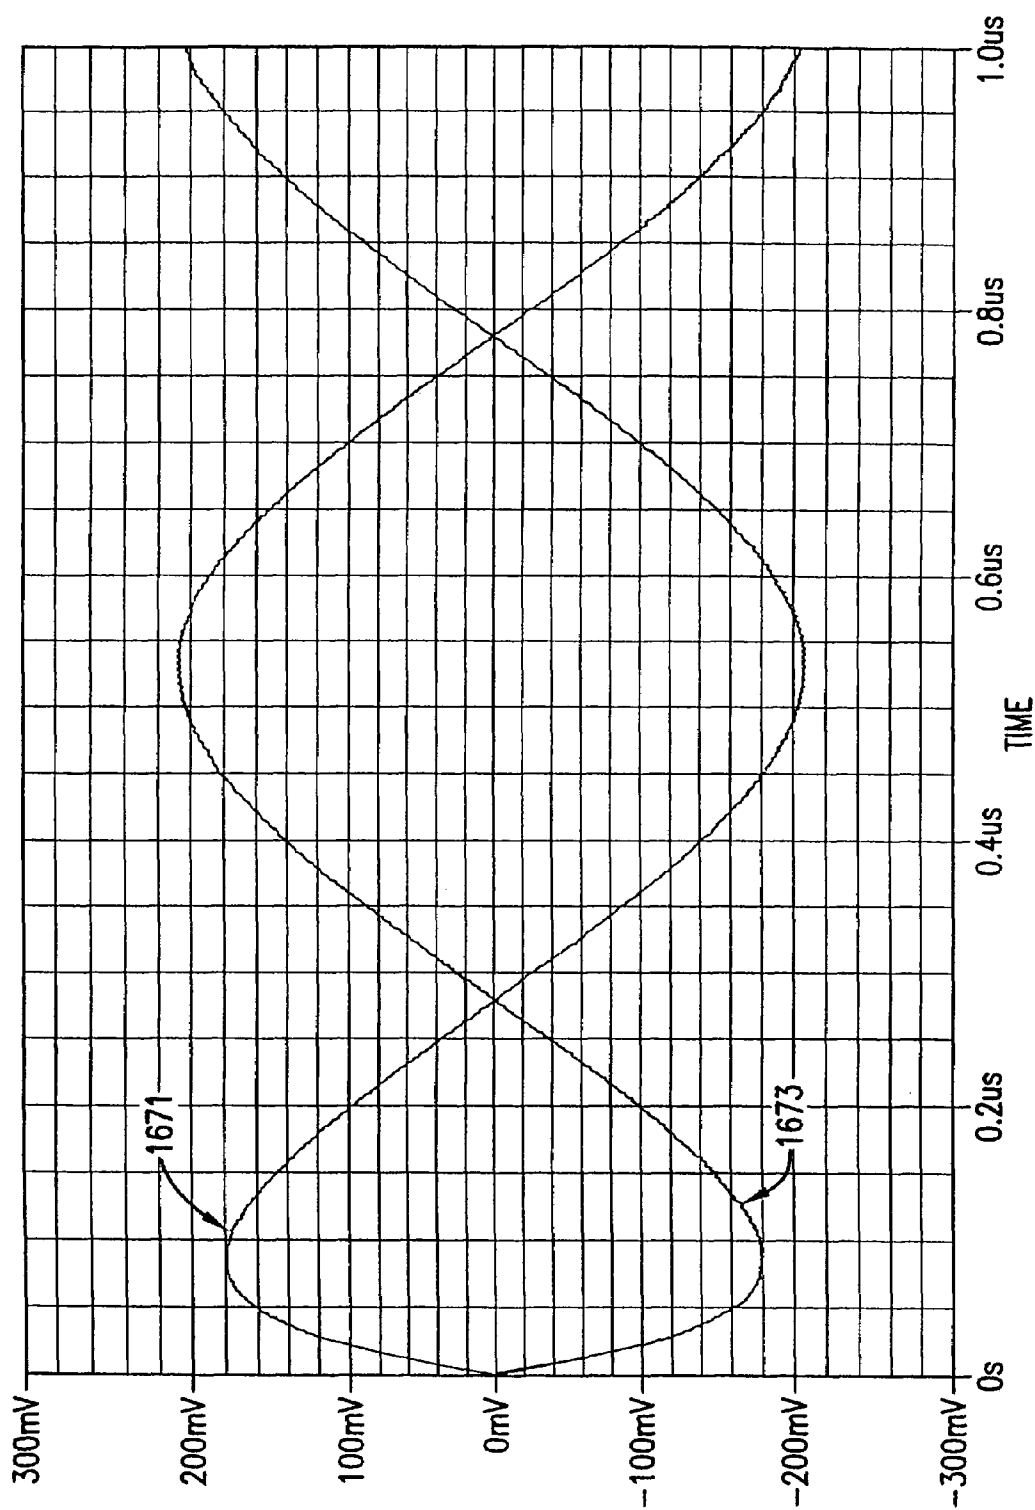


FIG.16N

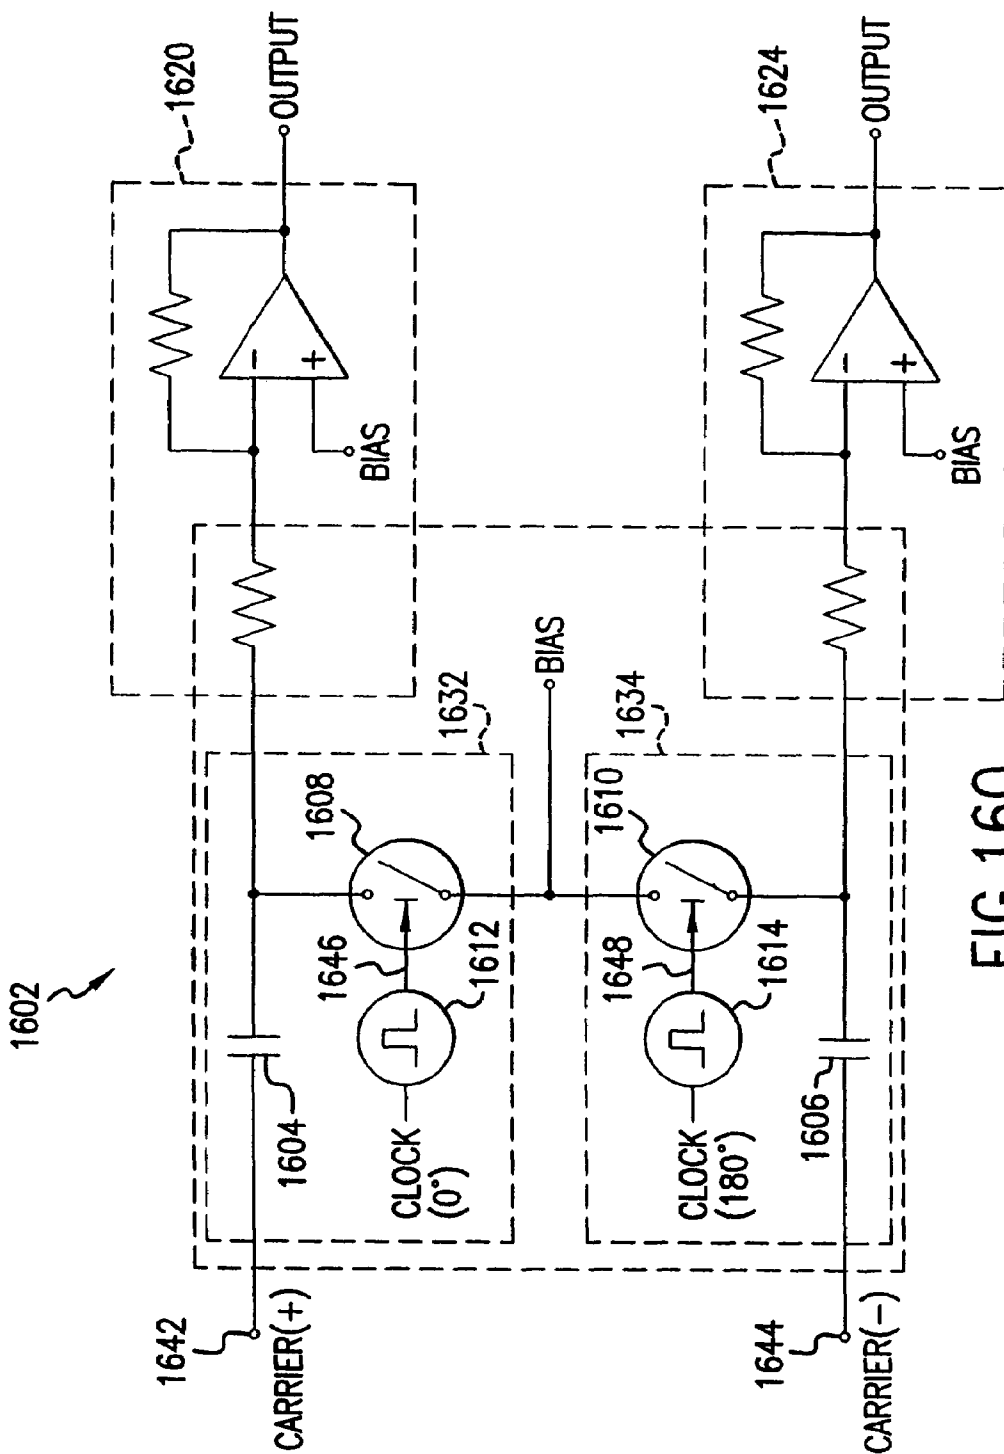


FIG.160

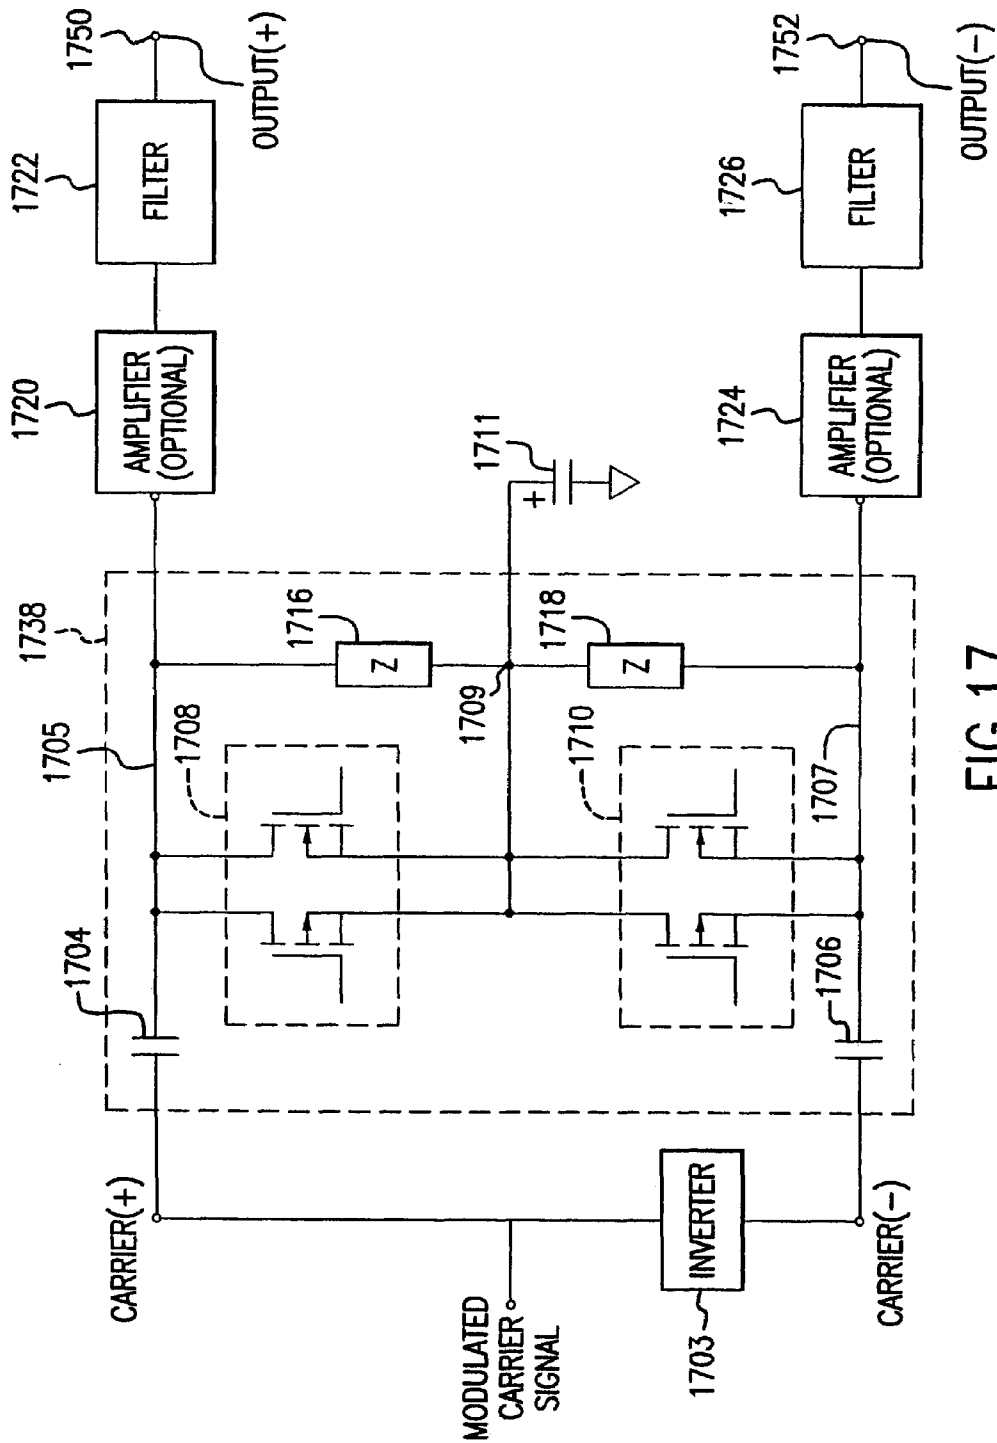
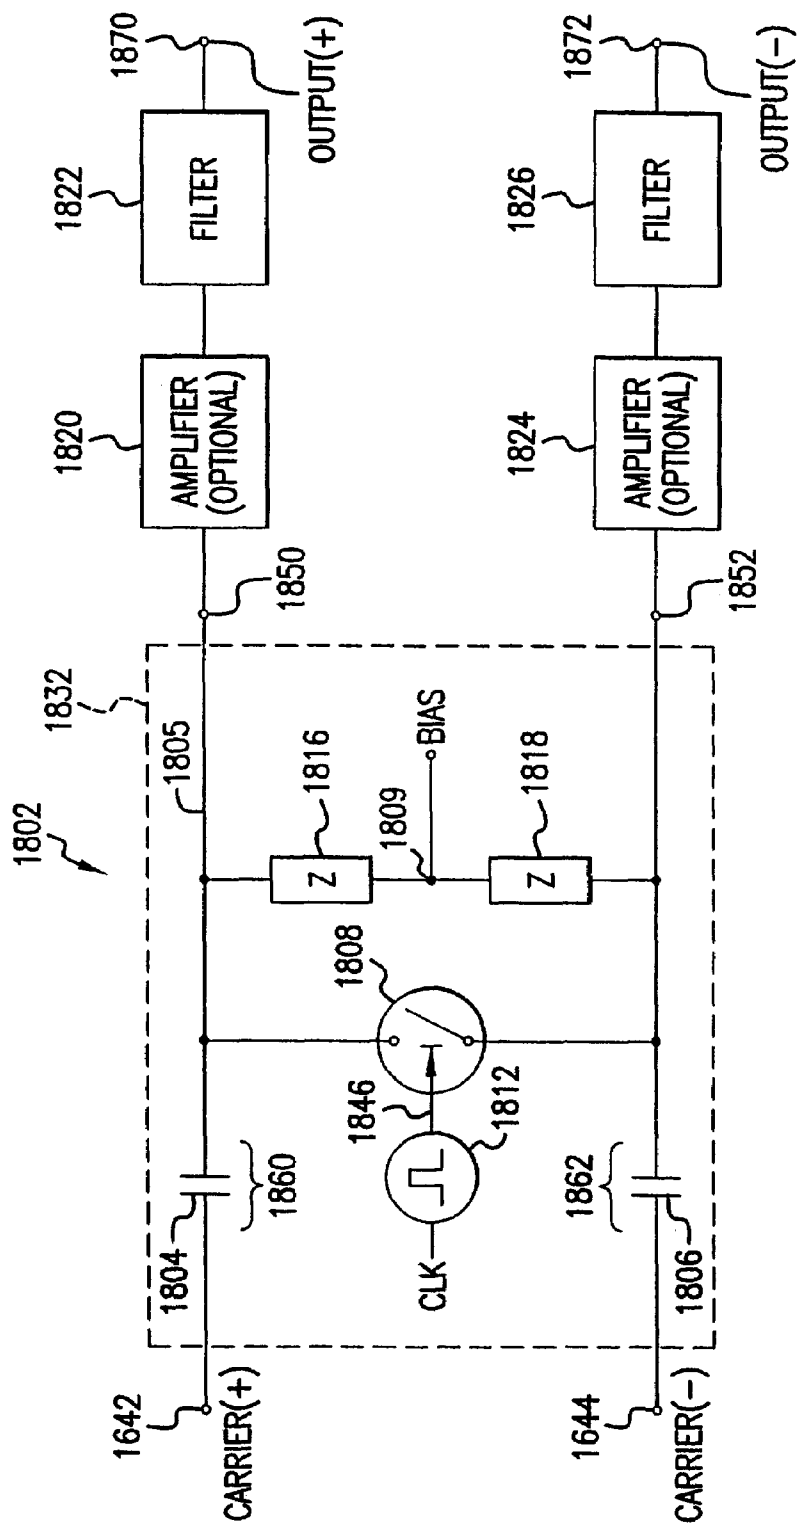


FIG. 17



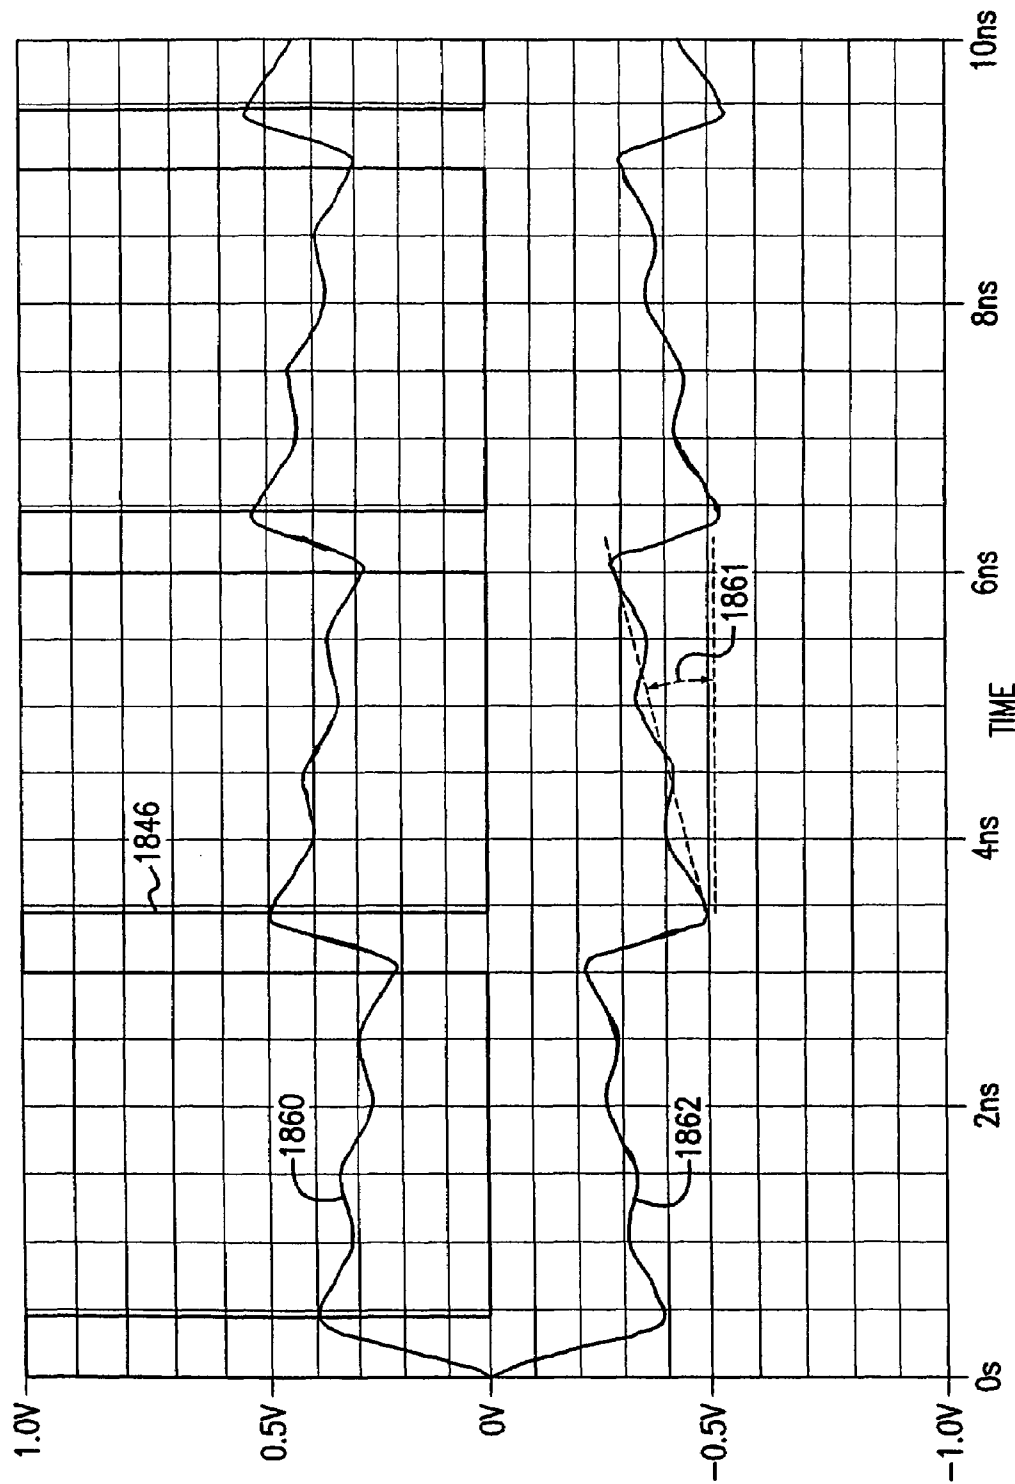


FIG.18B

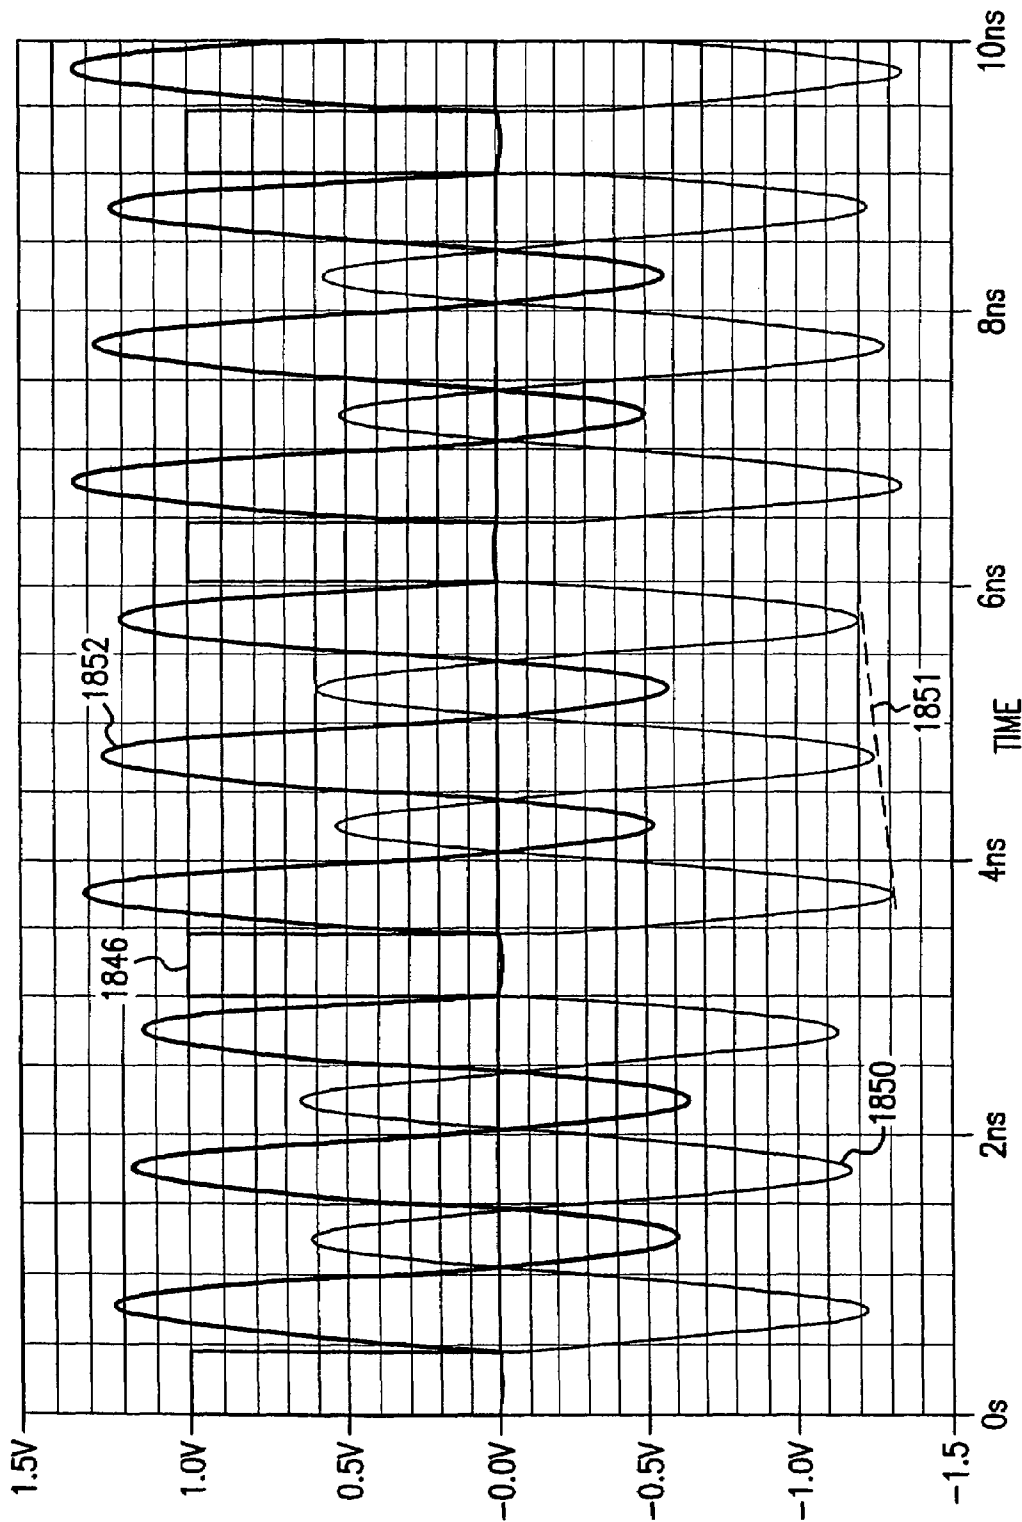


FIG.18C

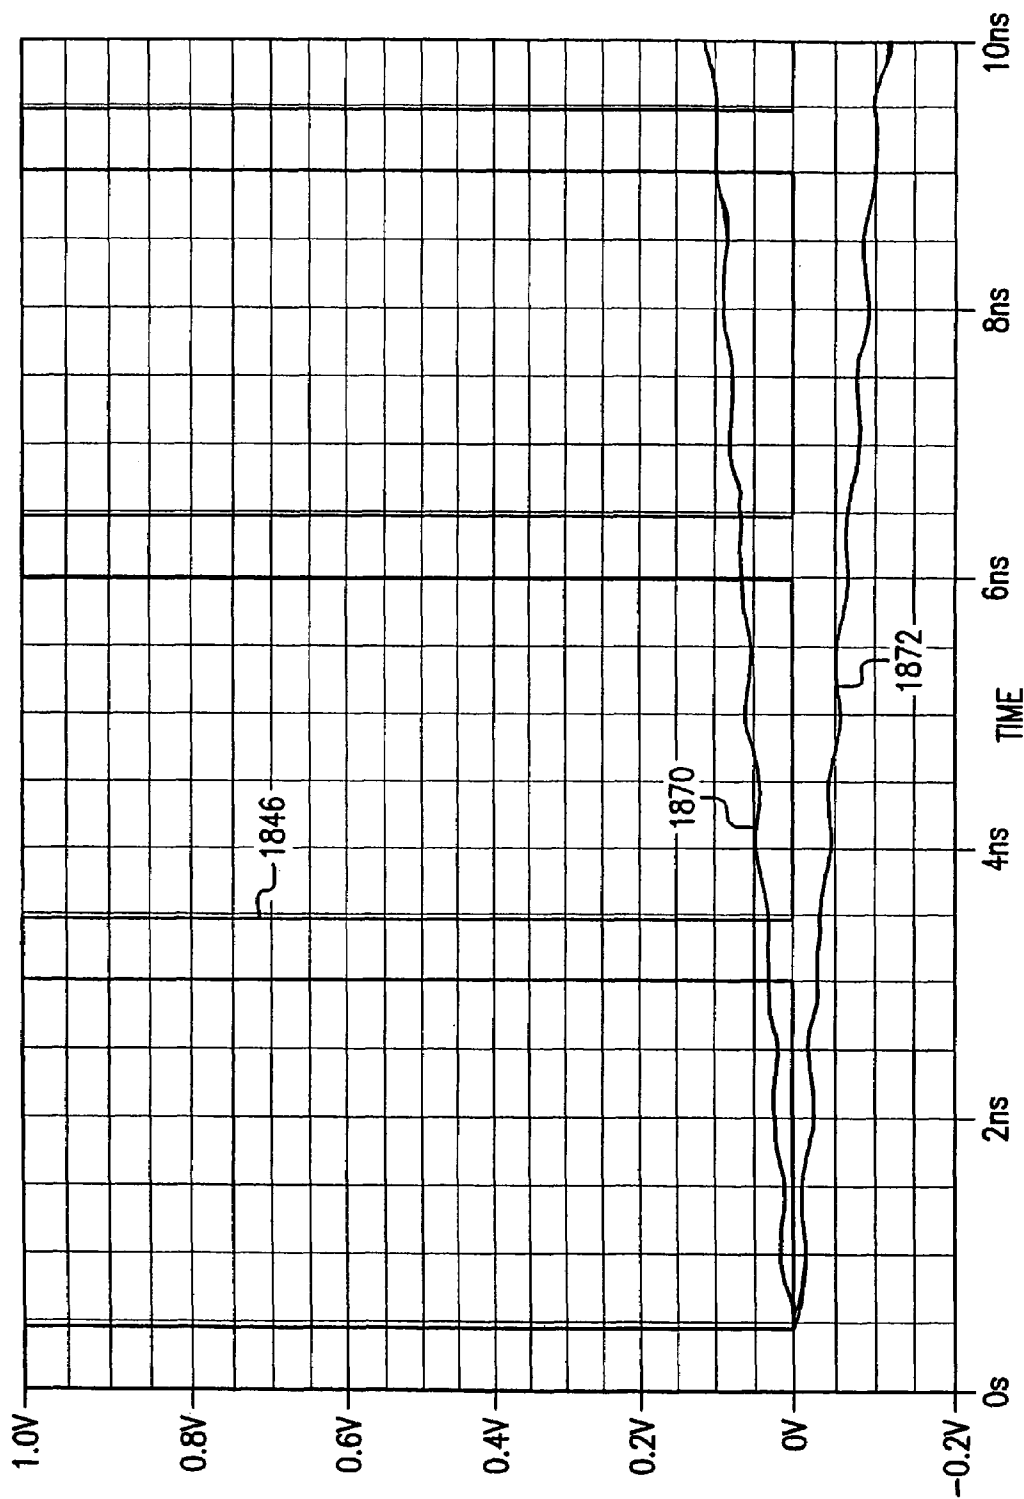


FIG.18D

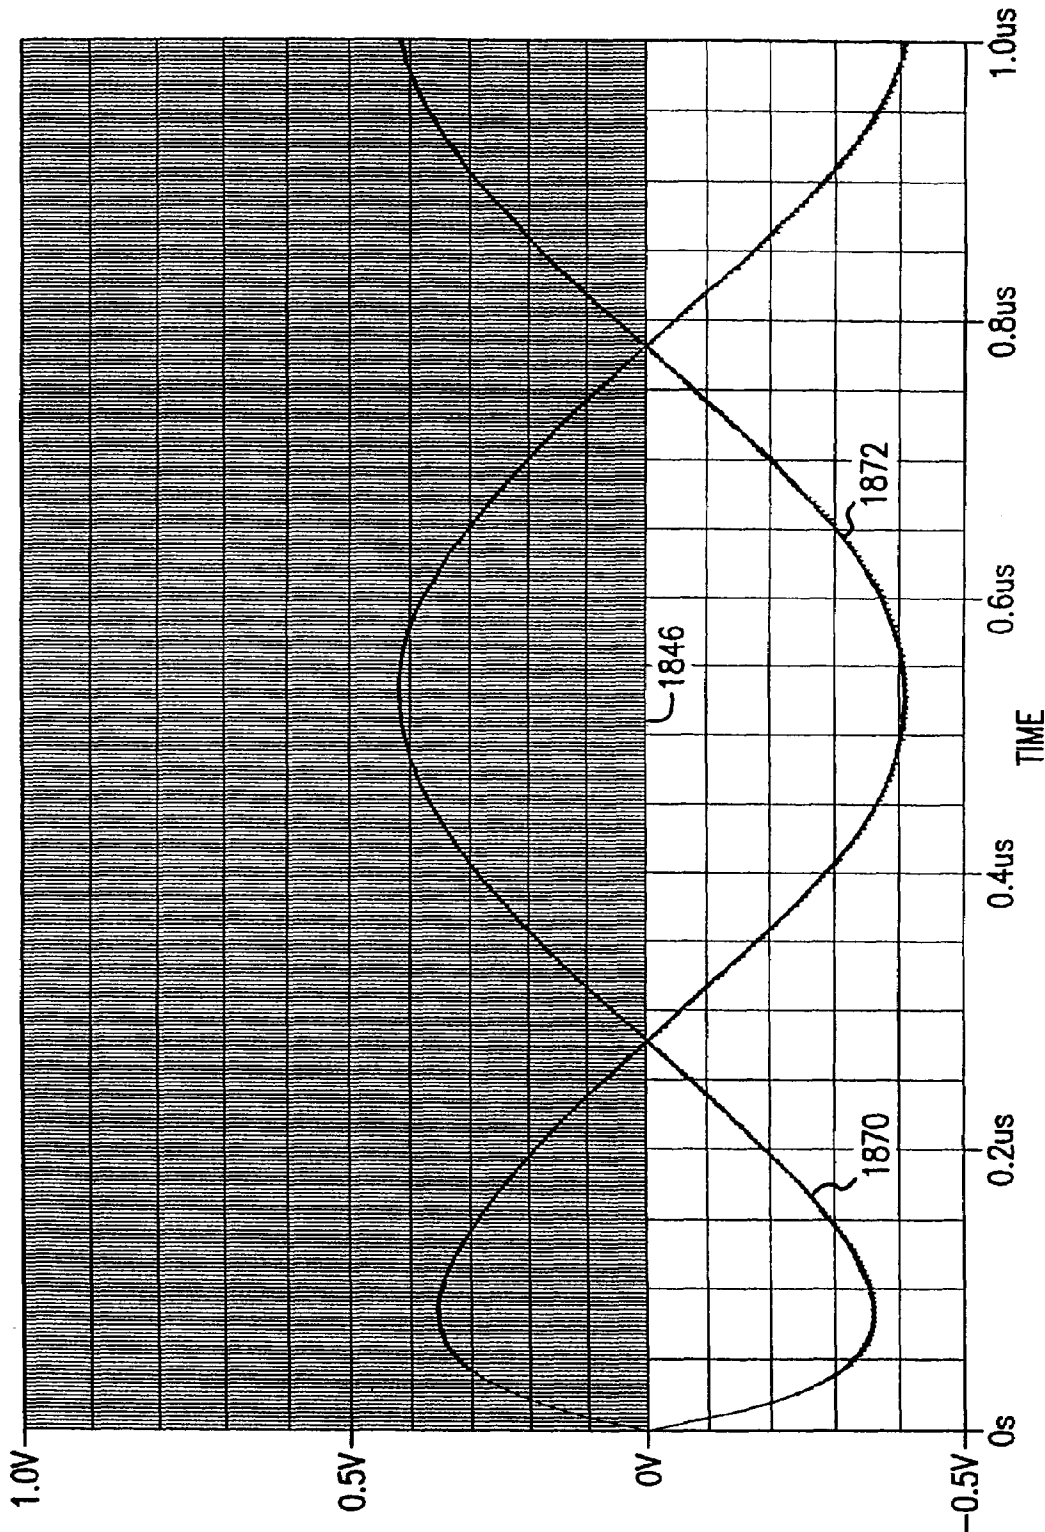


FIG. 18E

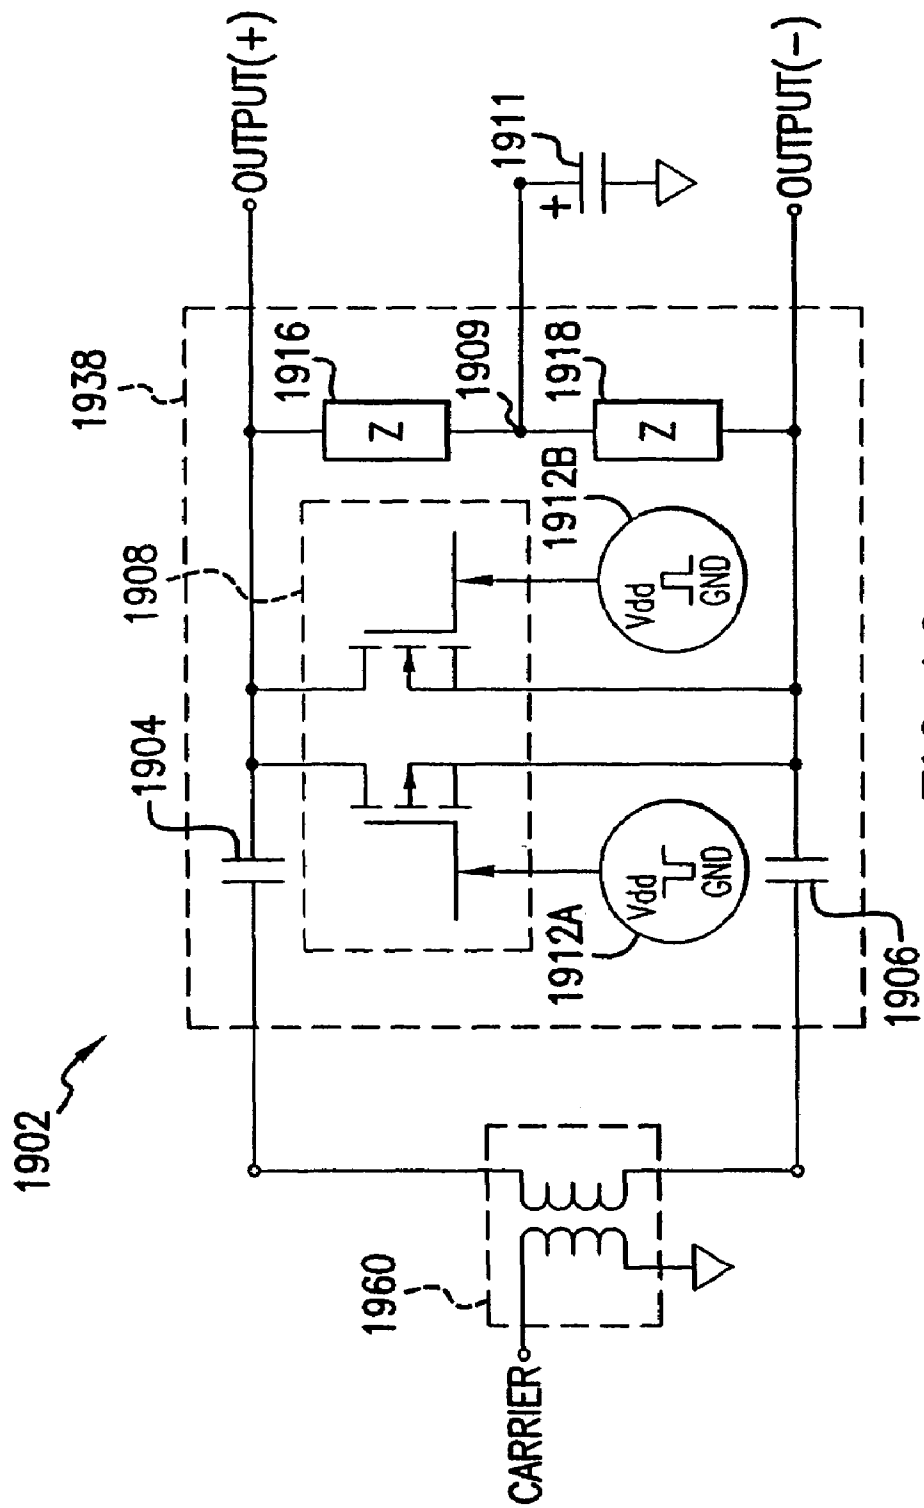


FIG.19

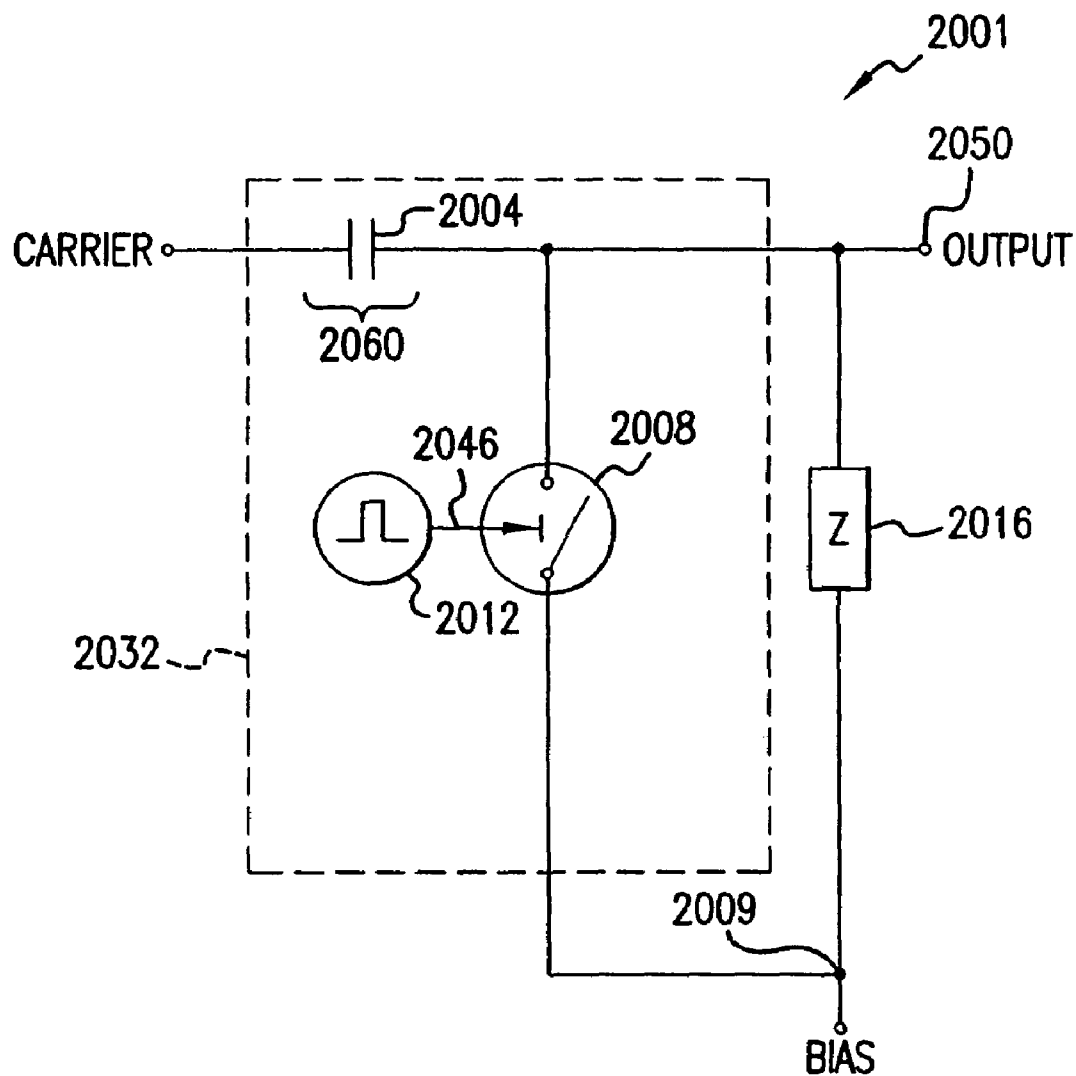


FIG. 20A

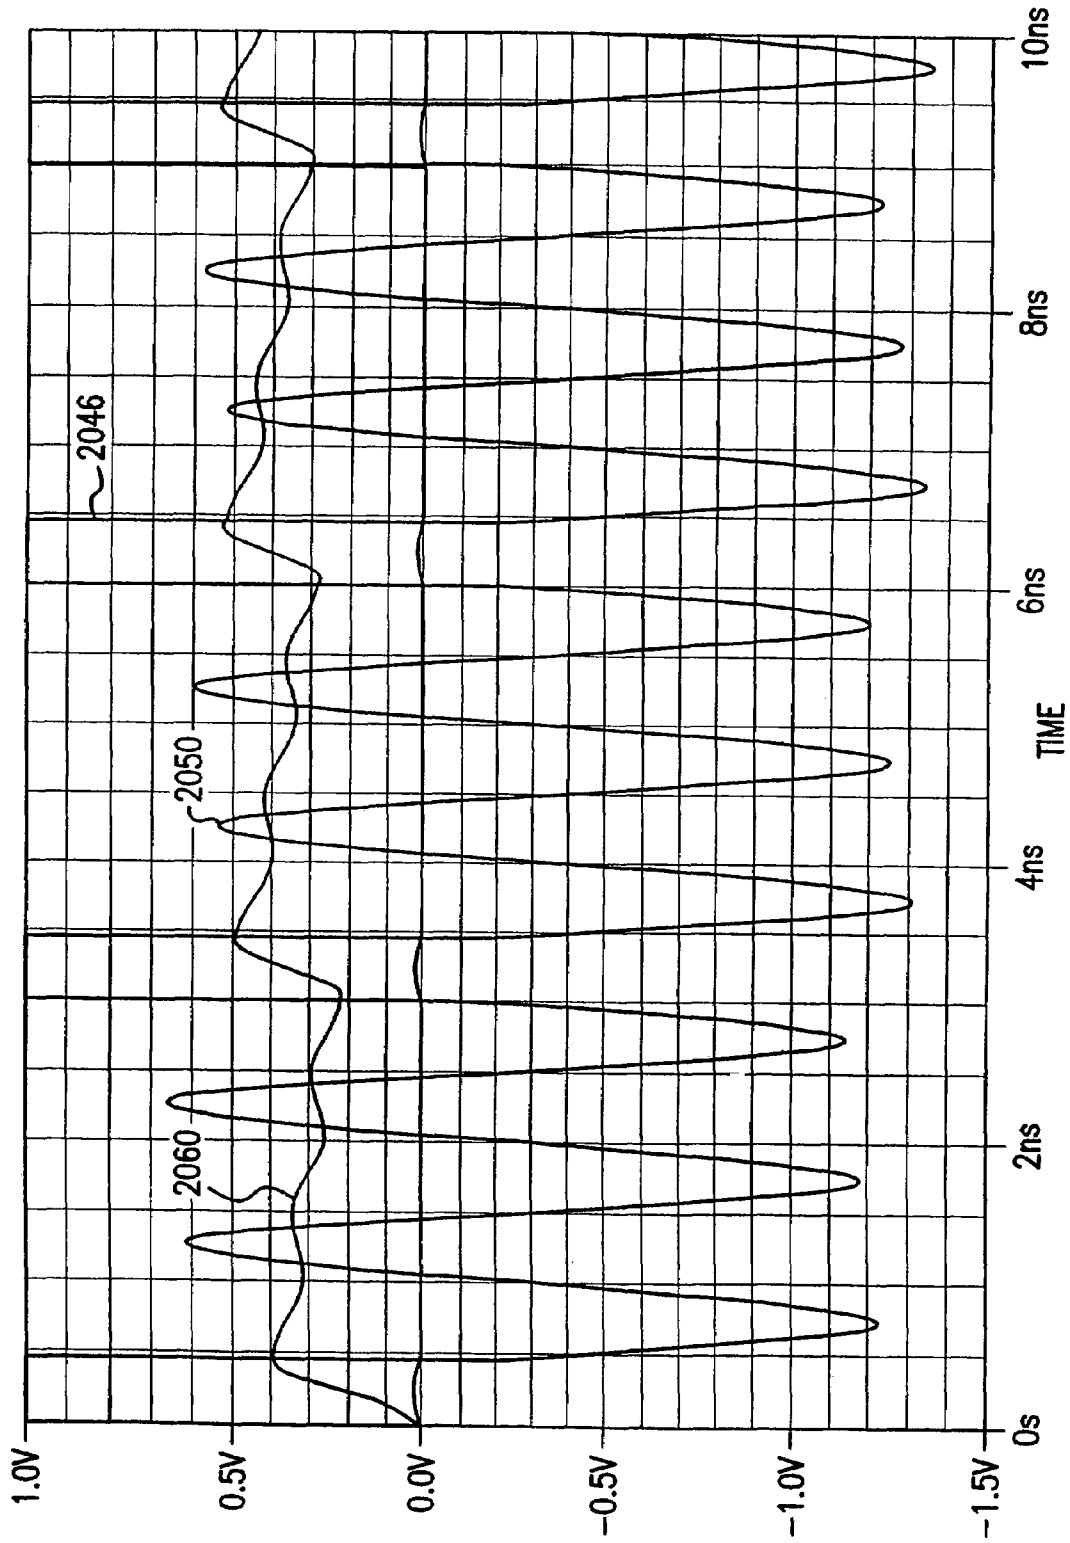


FIG.20B

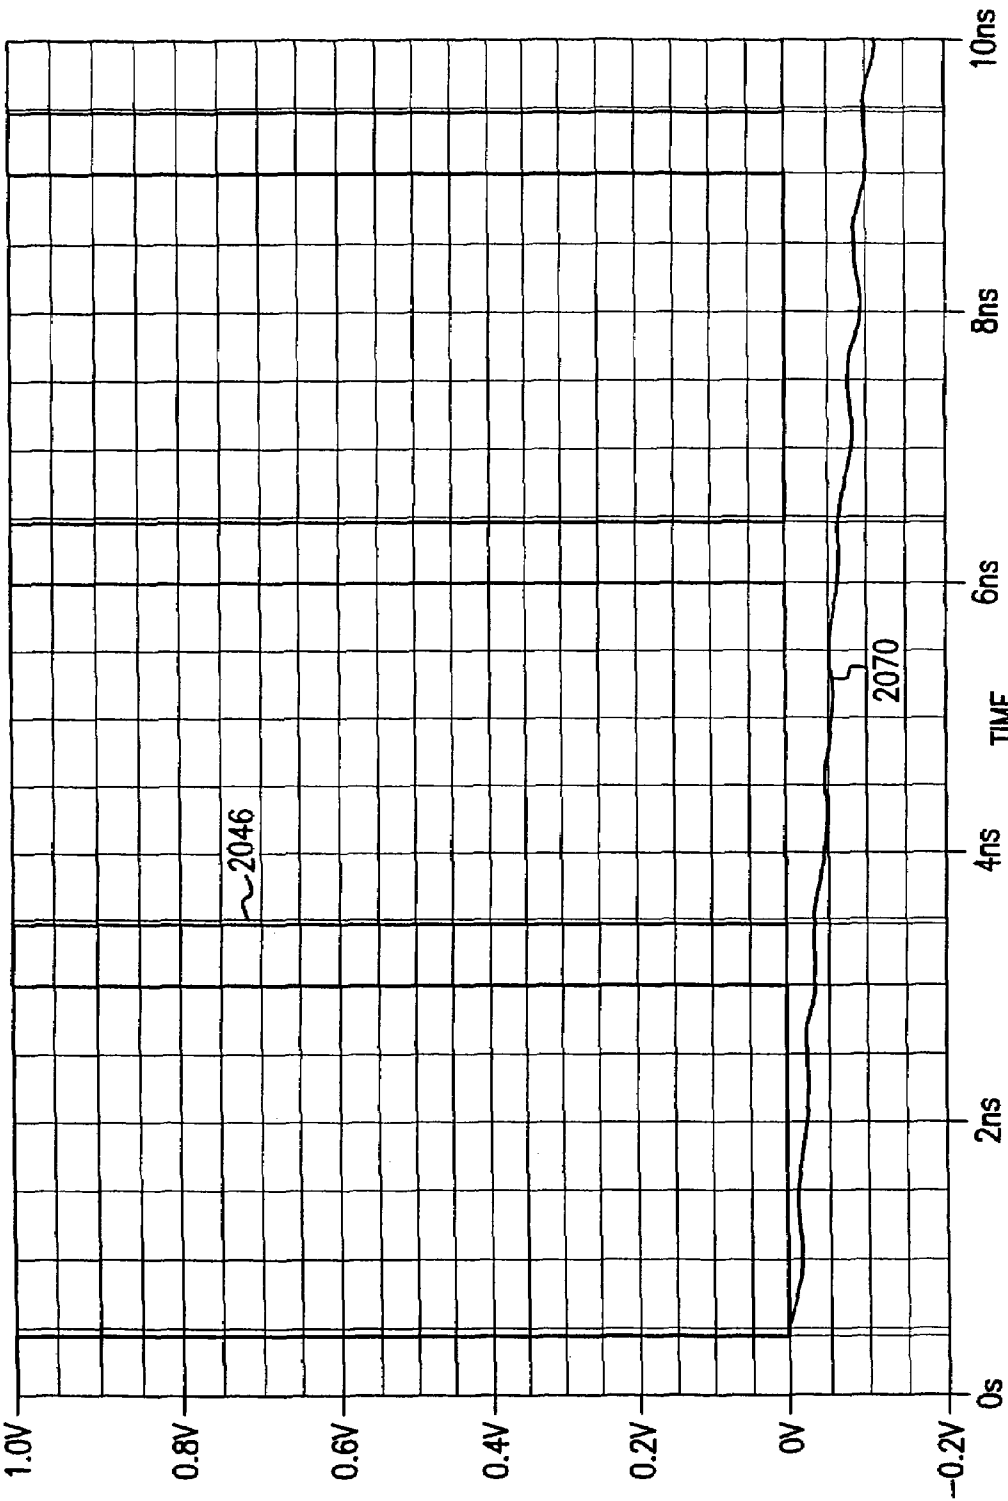


FIG.20C

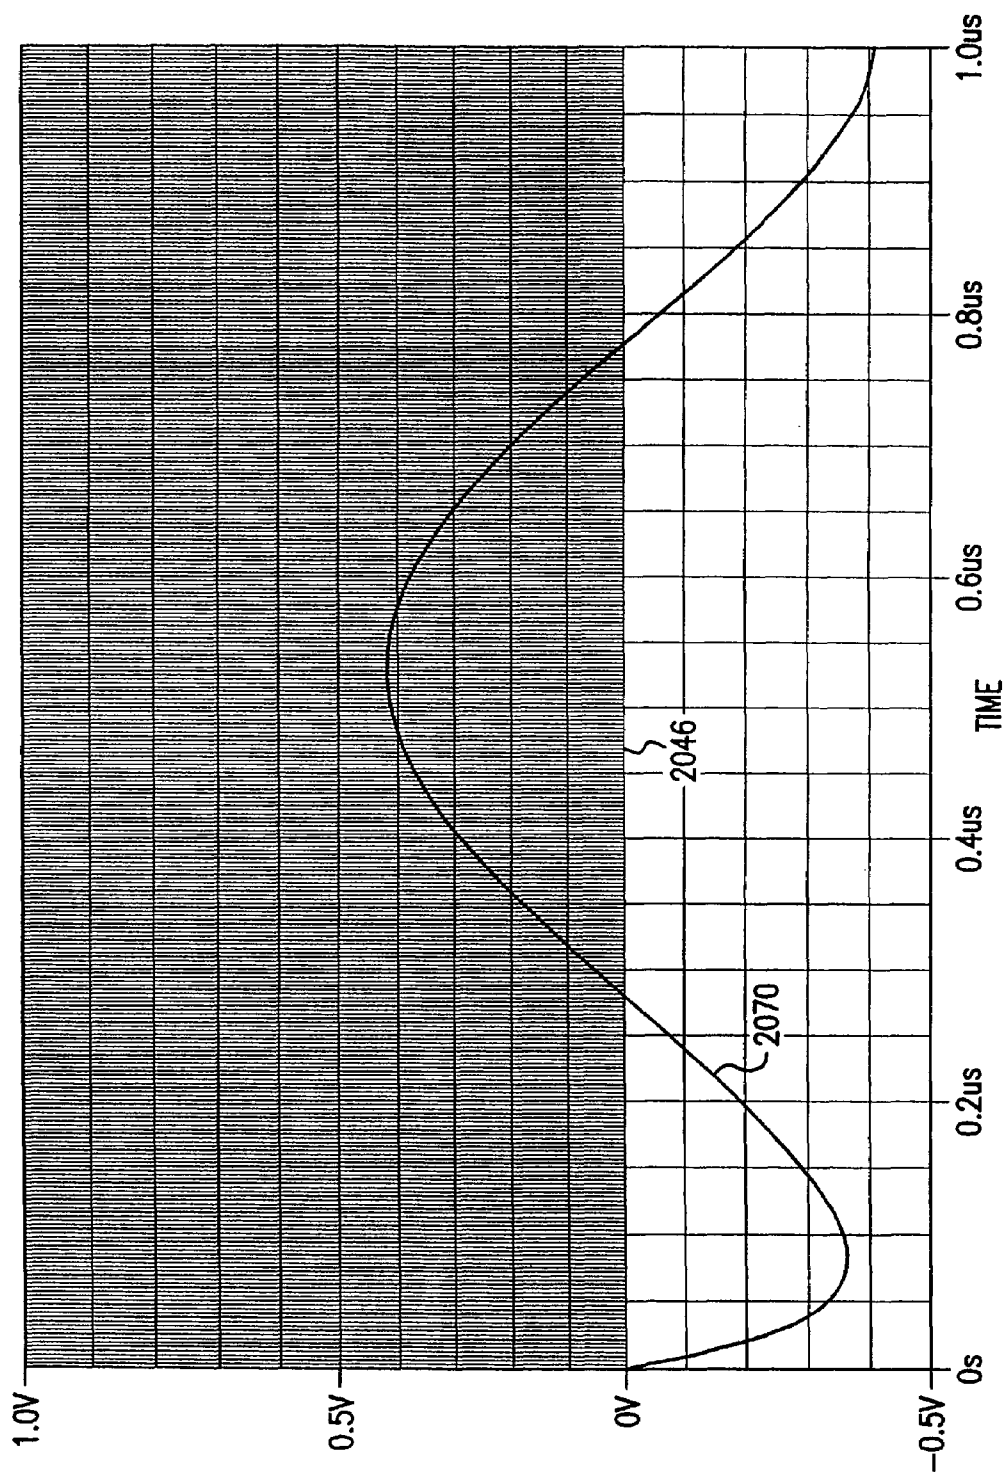
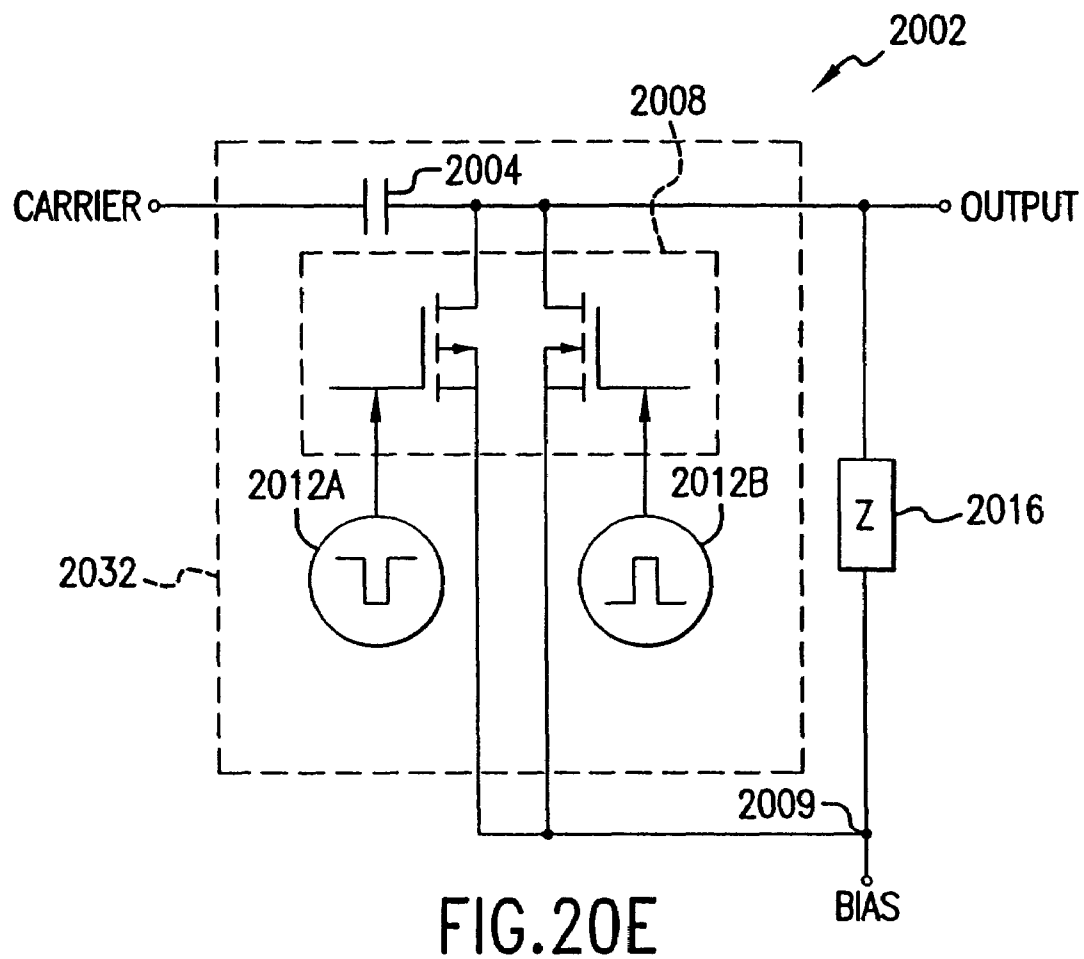


FIG. 20D



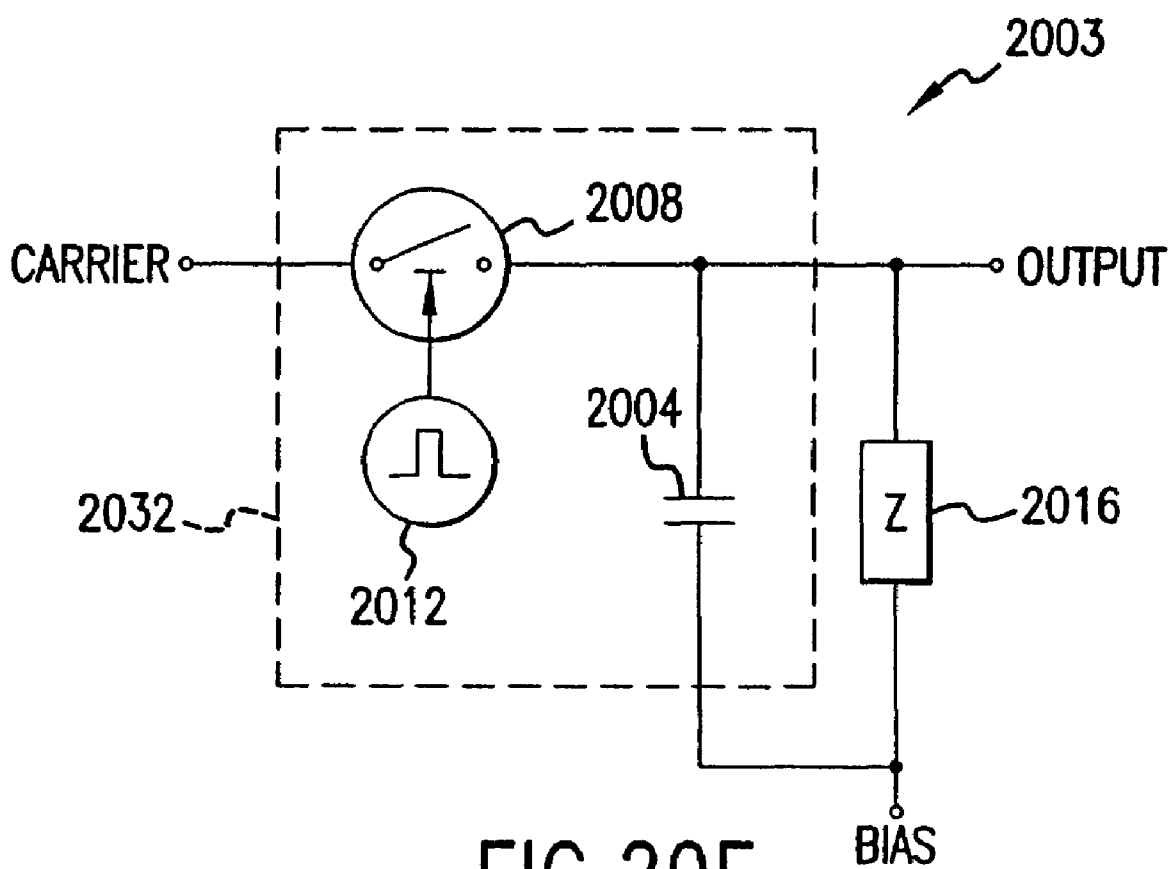


FIG. 20F

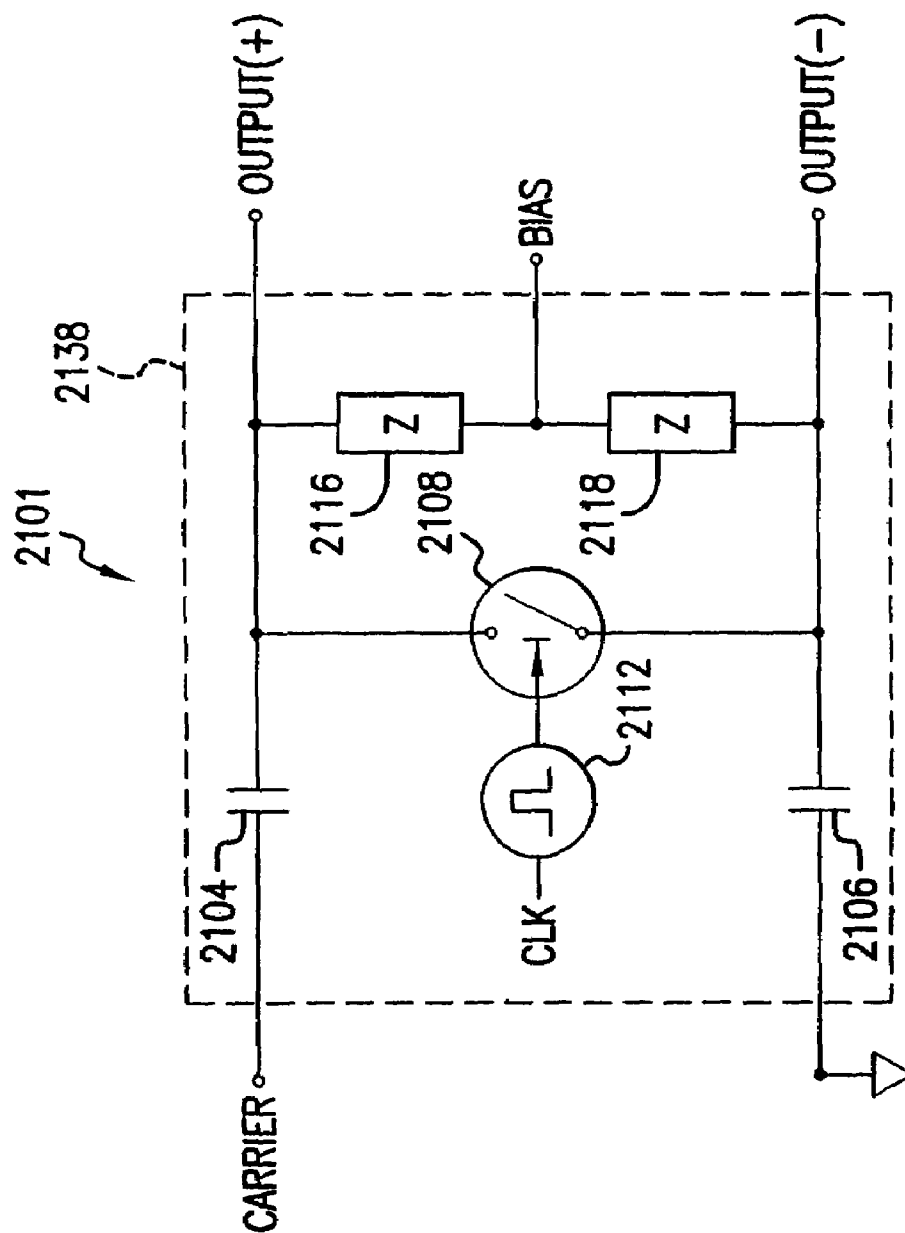


FIG. 21

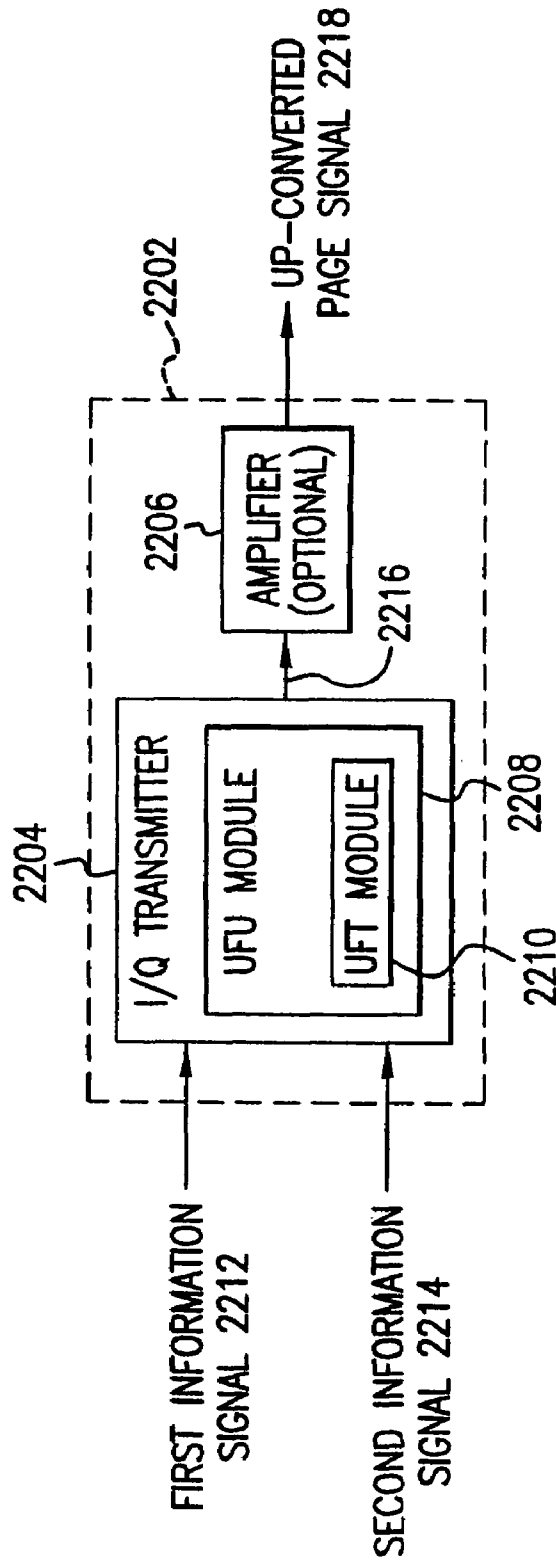


FIG. 22

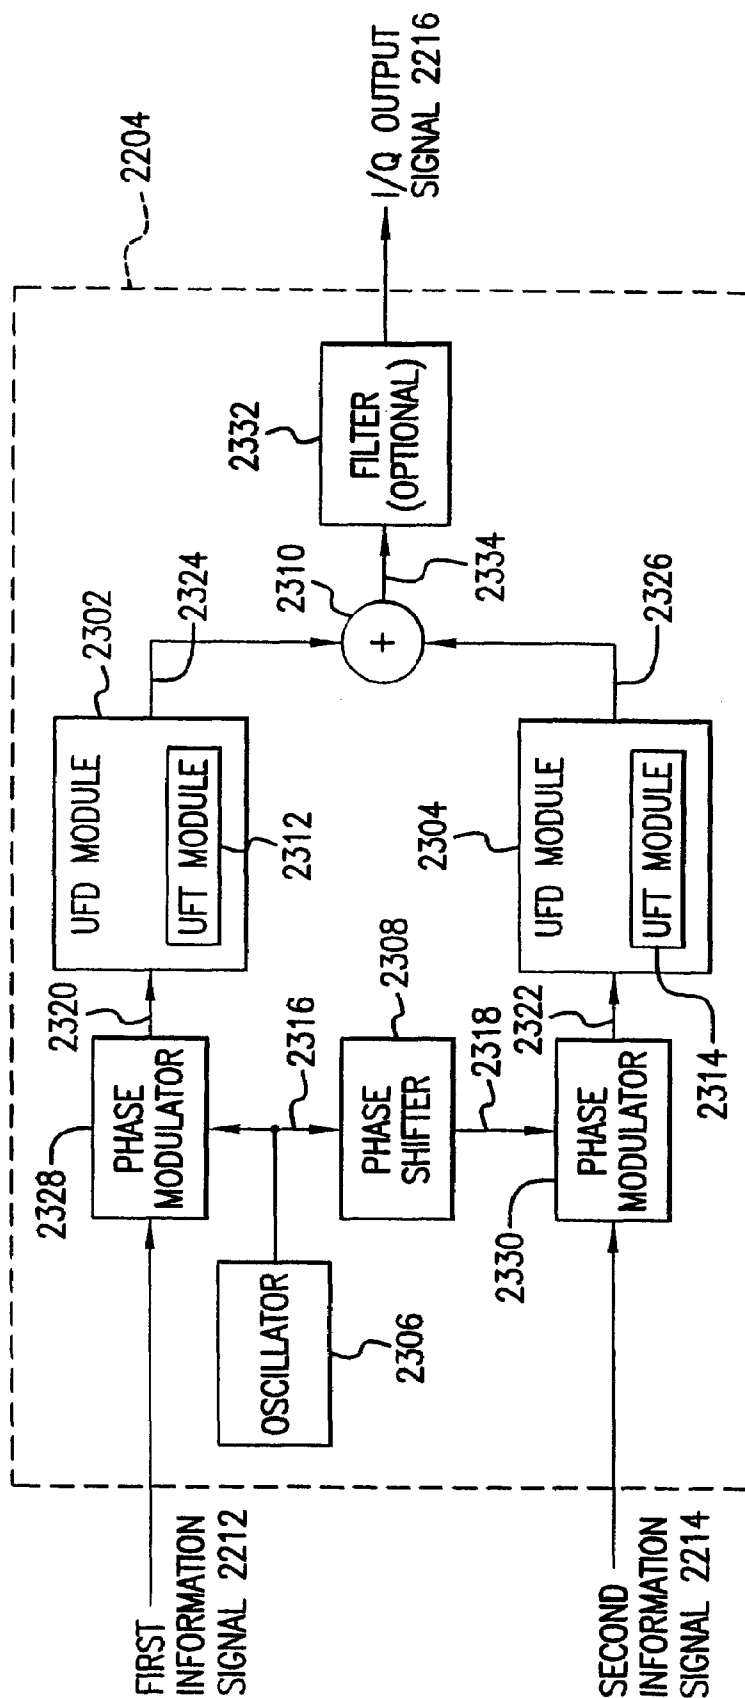


FIG. 23

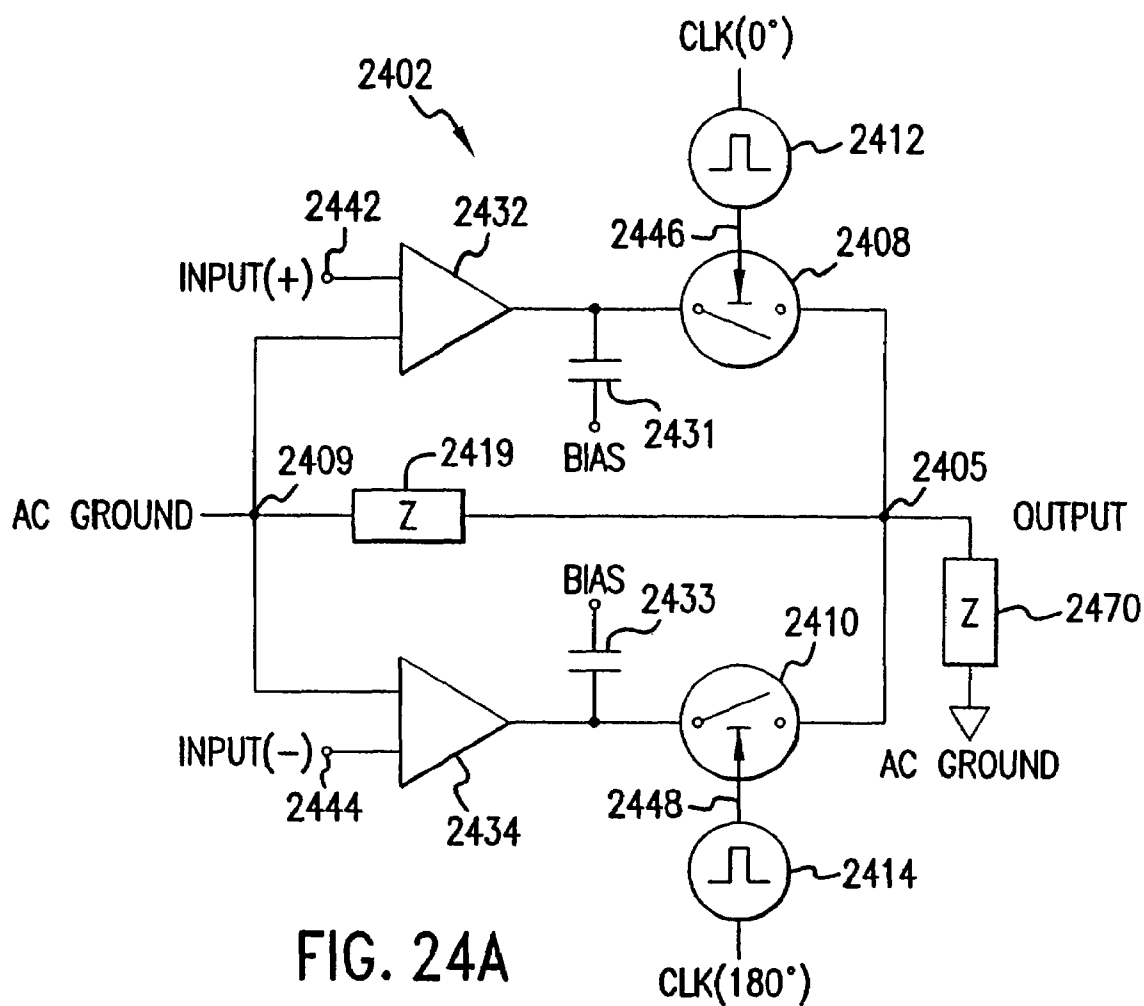


FIG. 24A

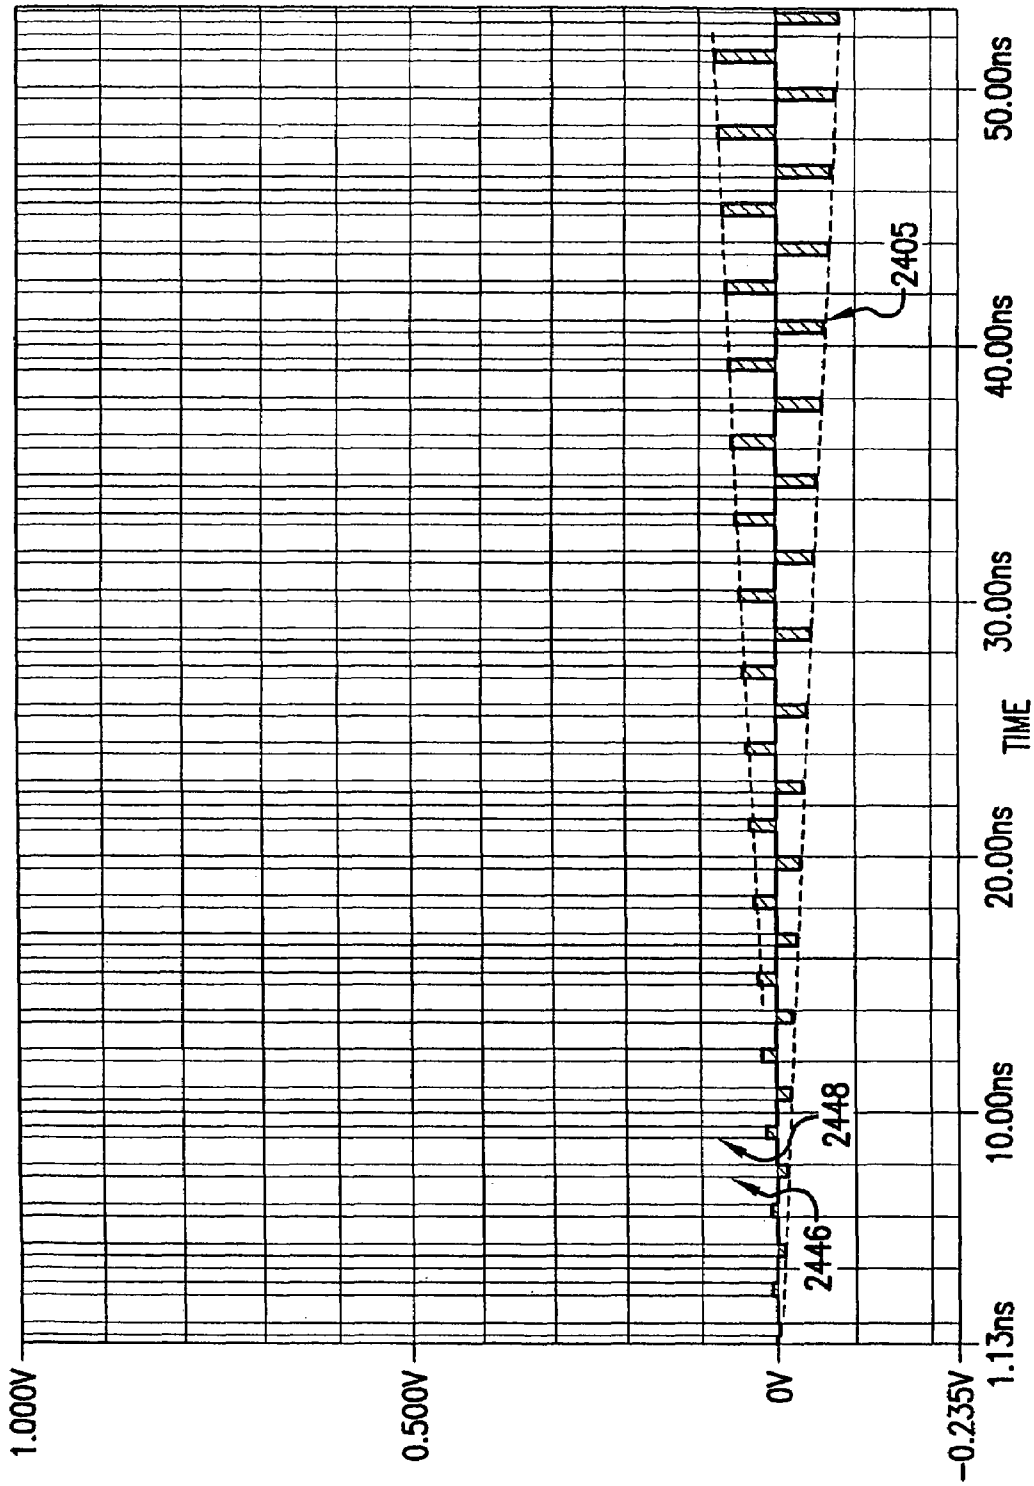


FIG. 24B

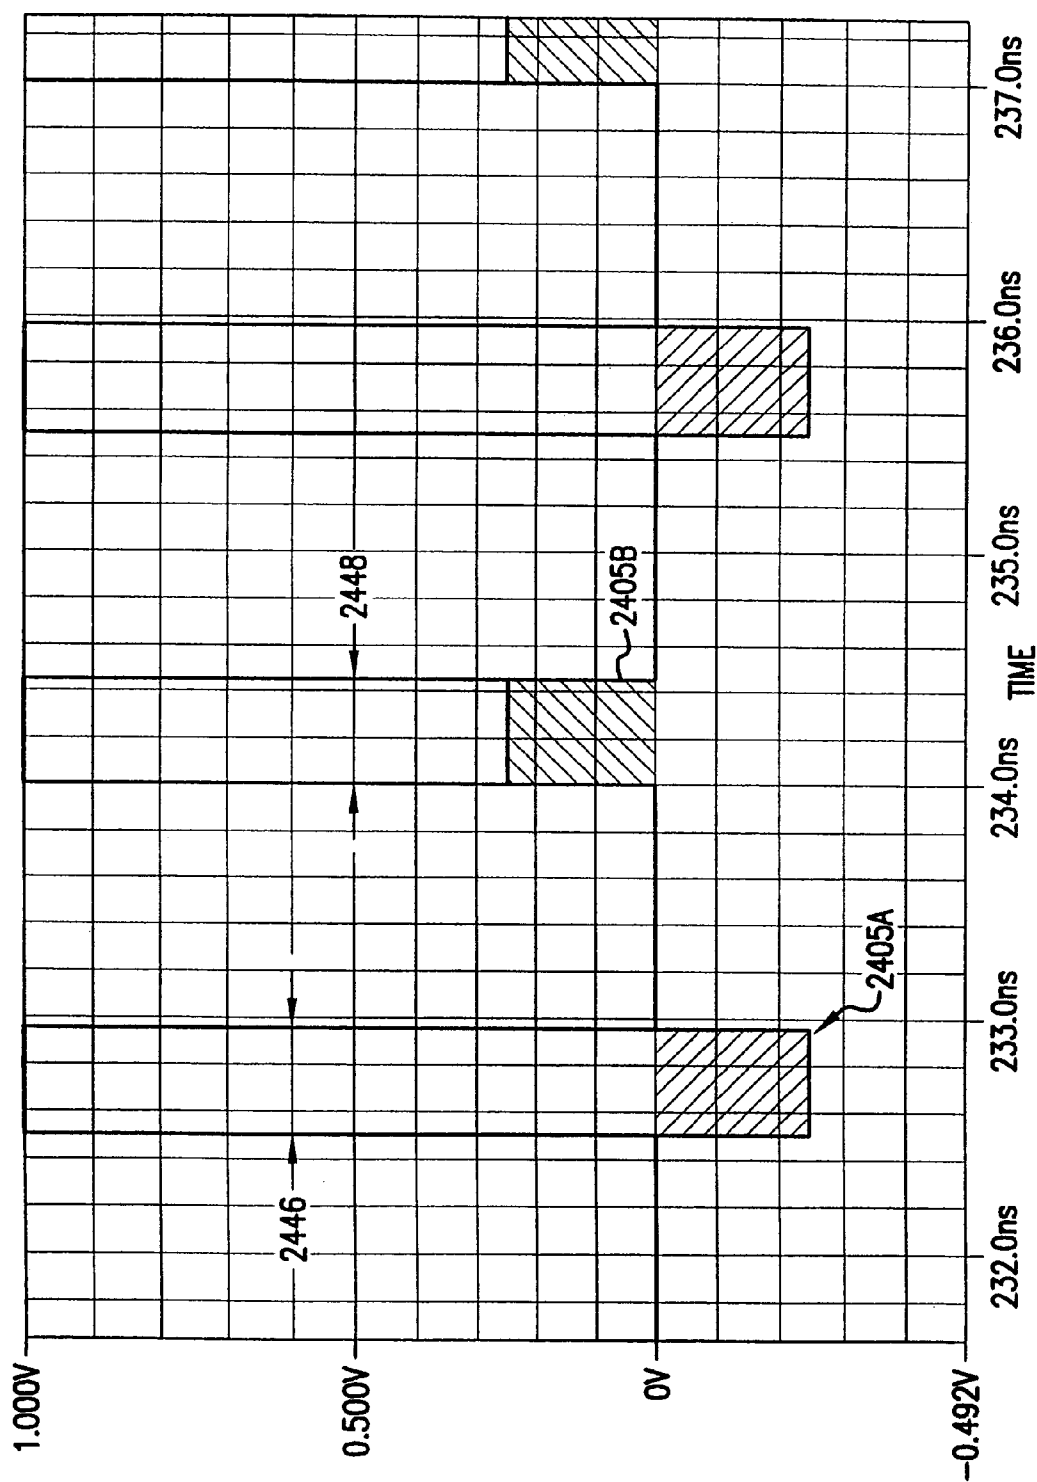


FIG. 24C

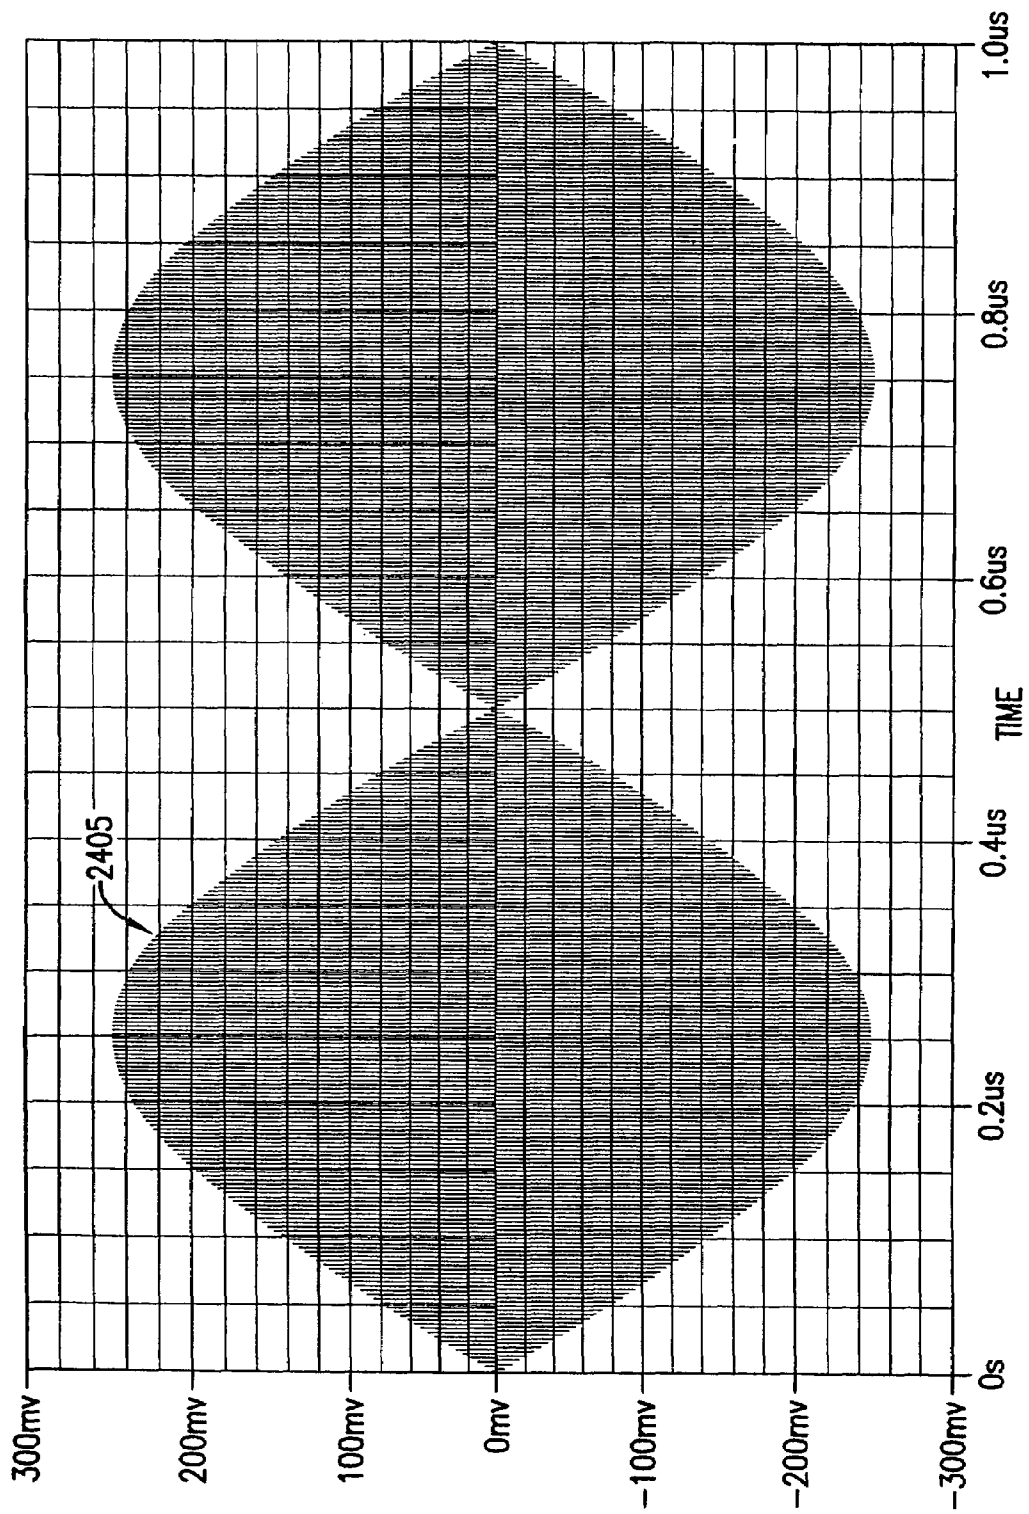


FIG. 24D

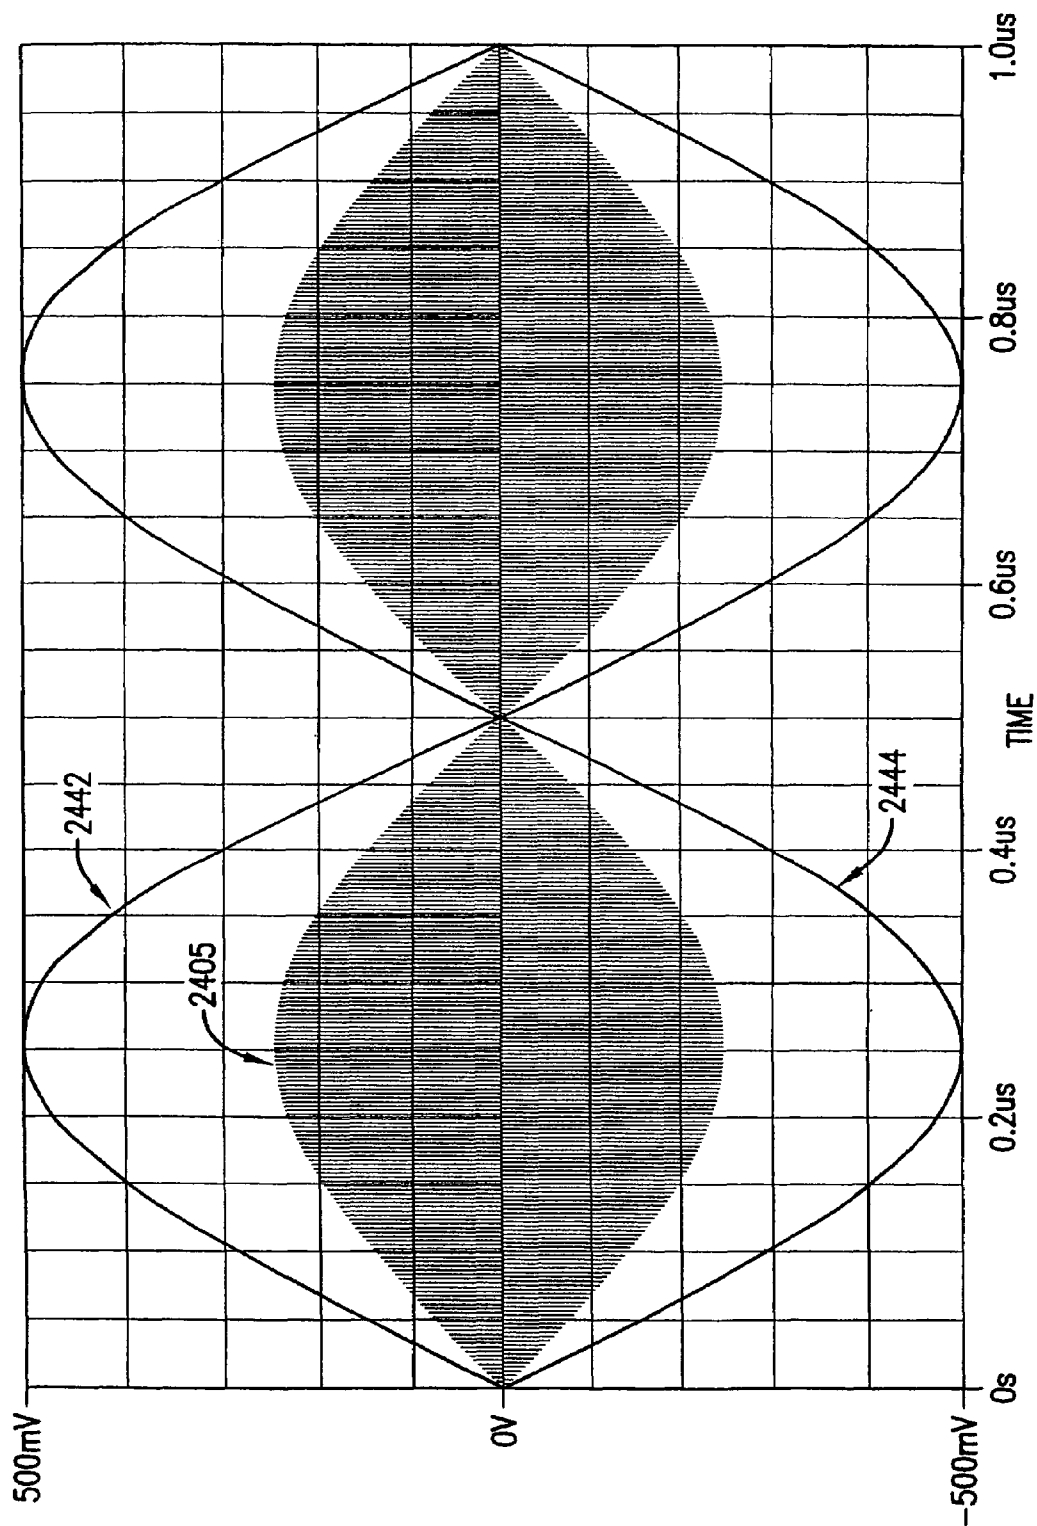


FIG. 24E

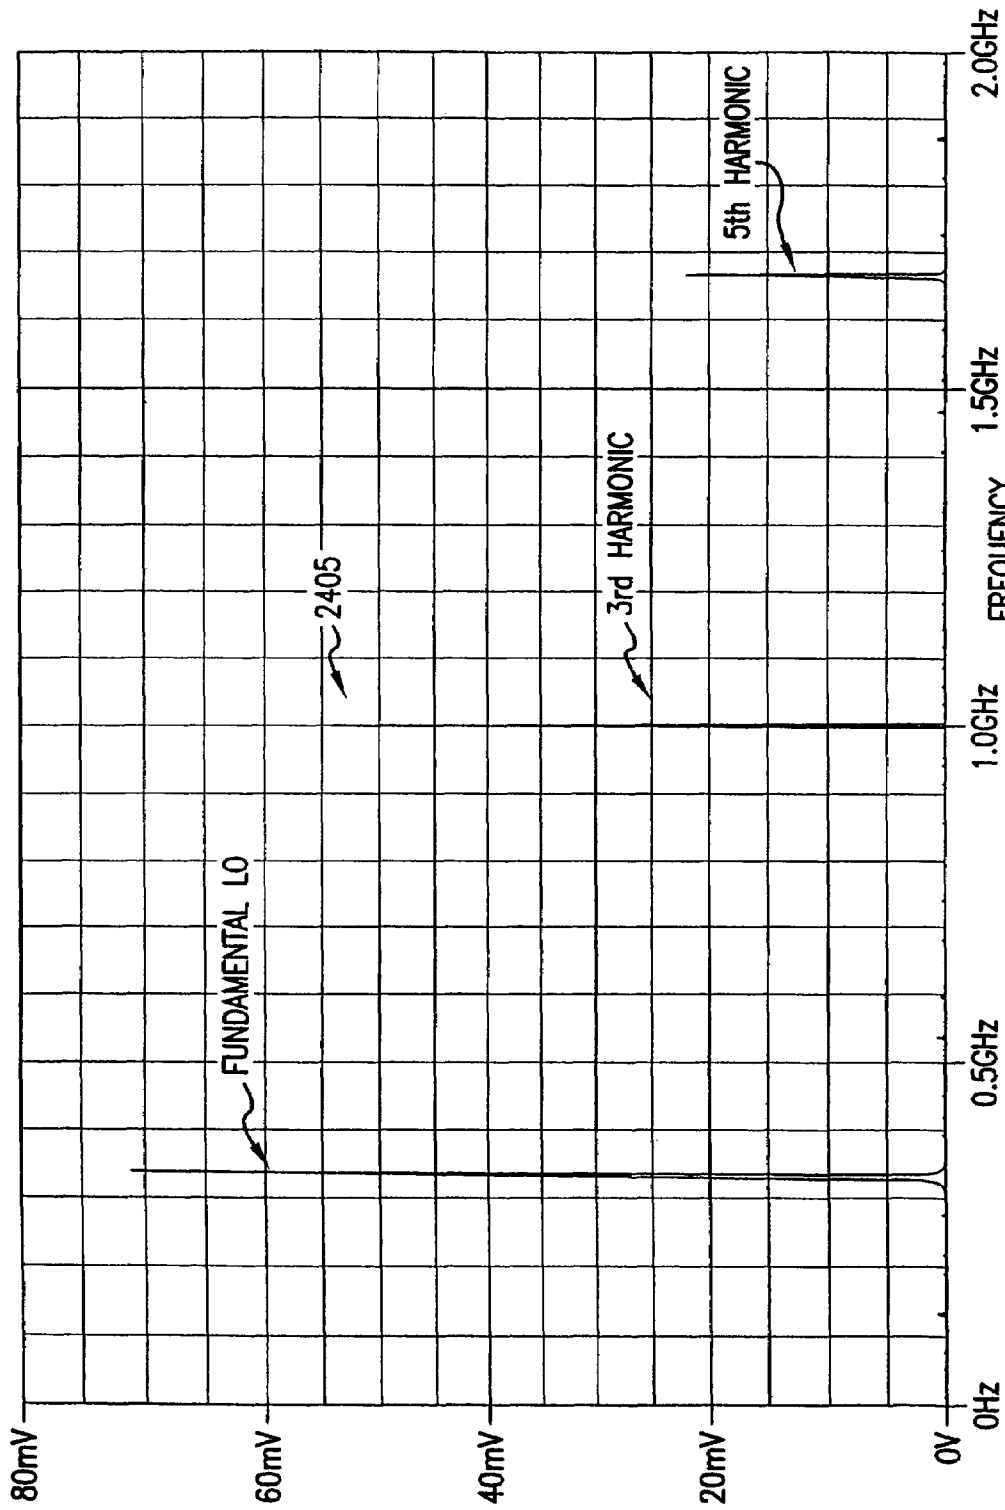
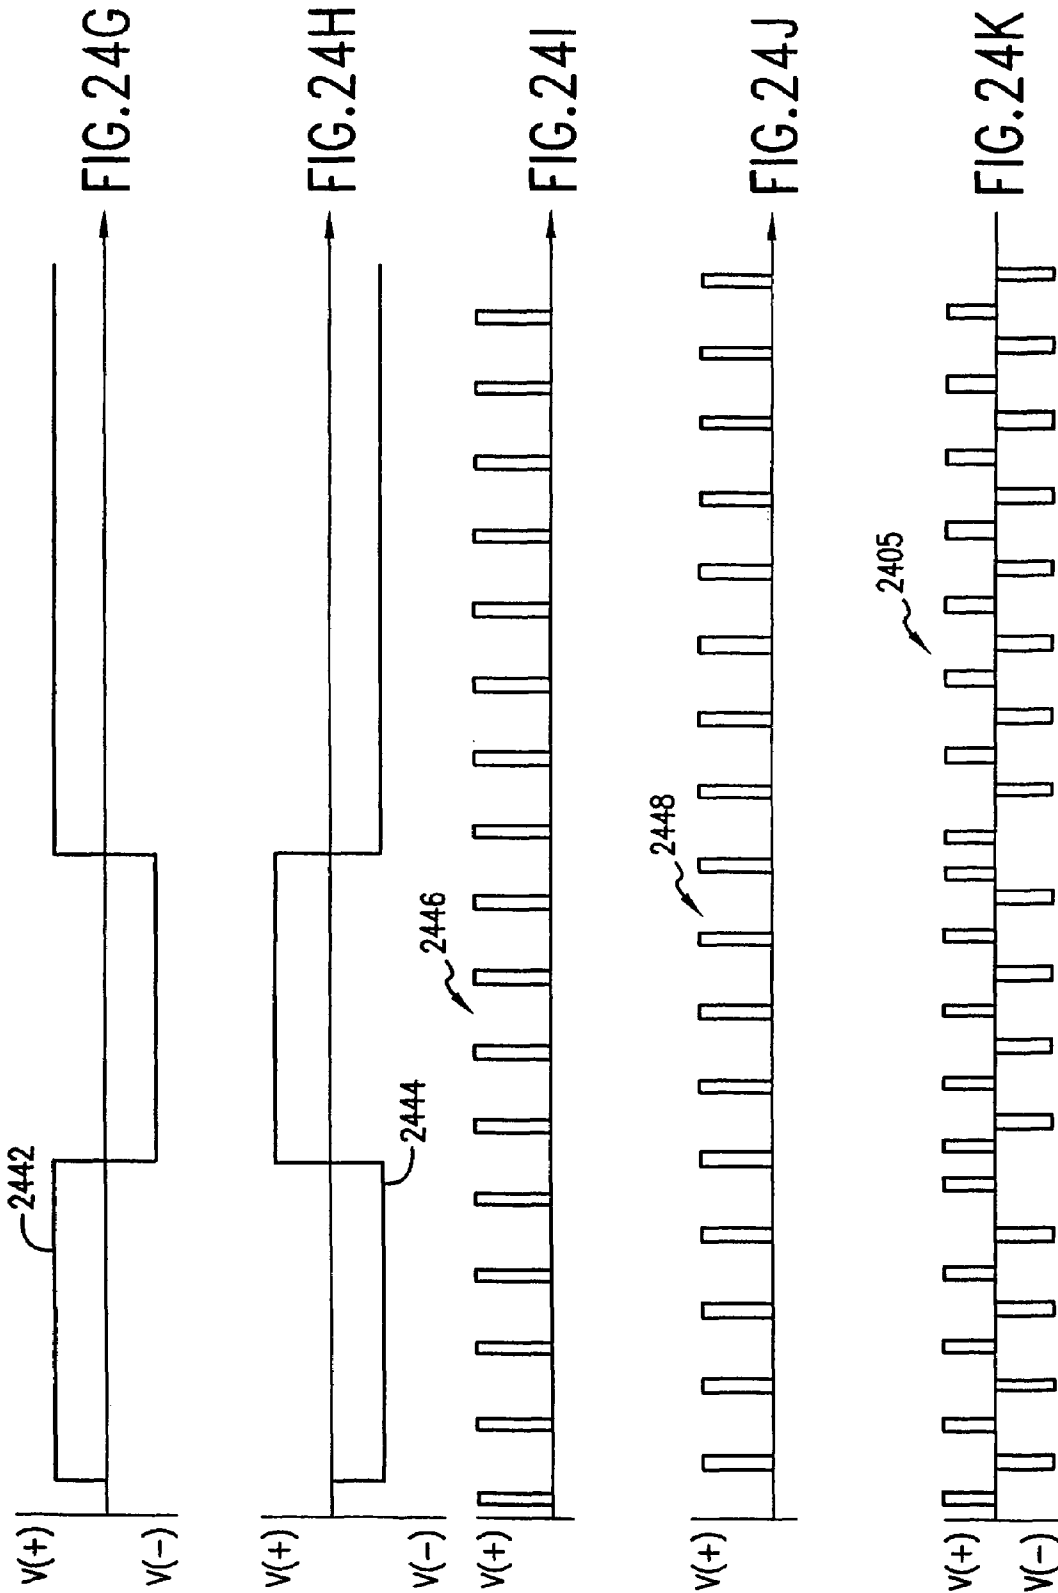


FIG. 24F



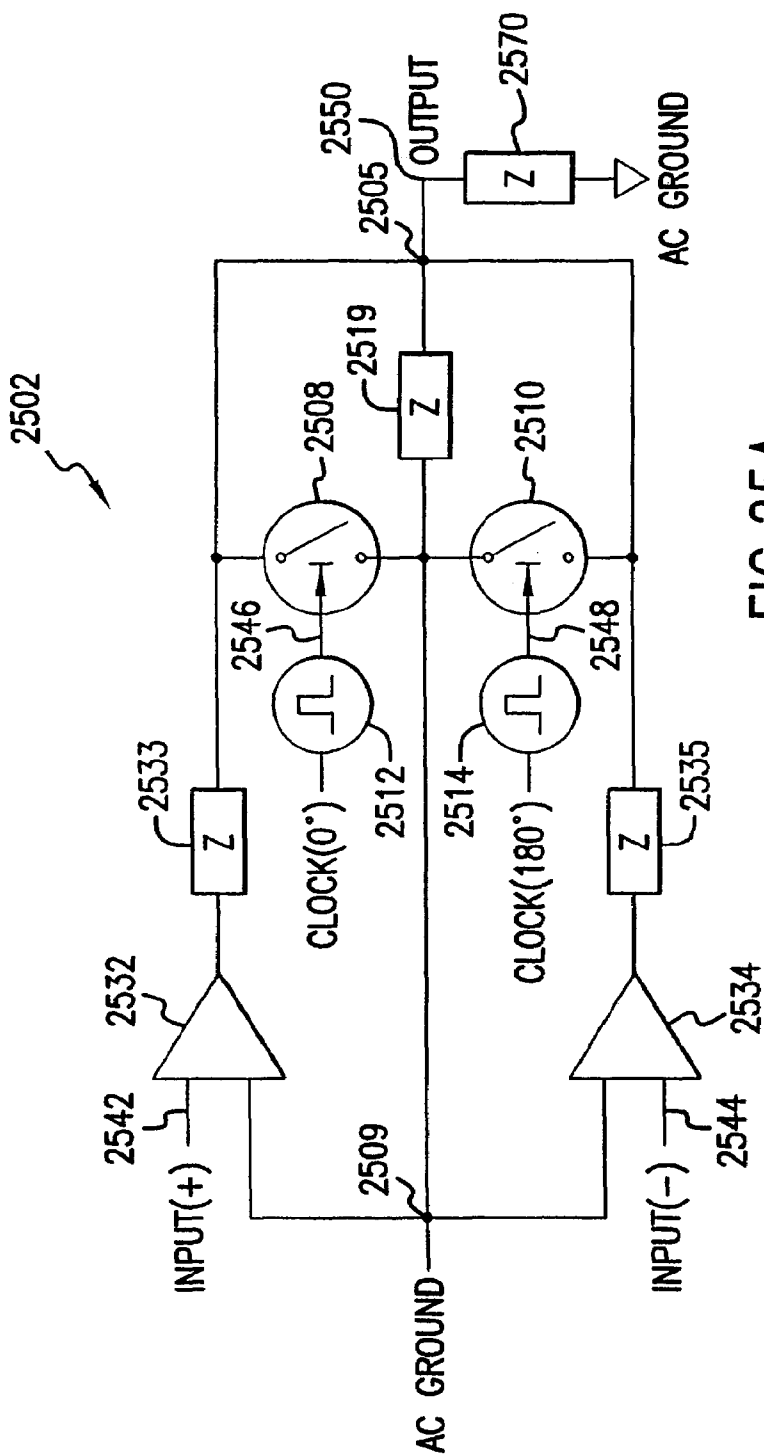
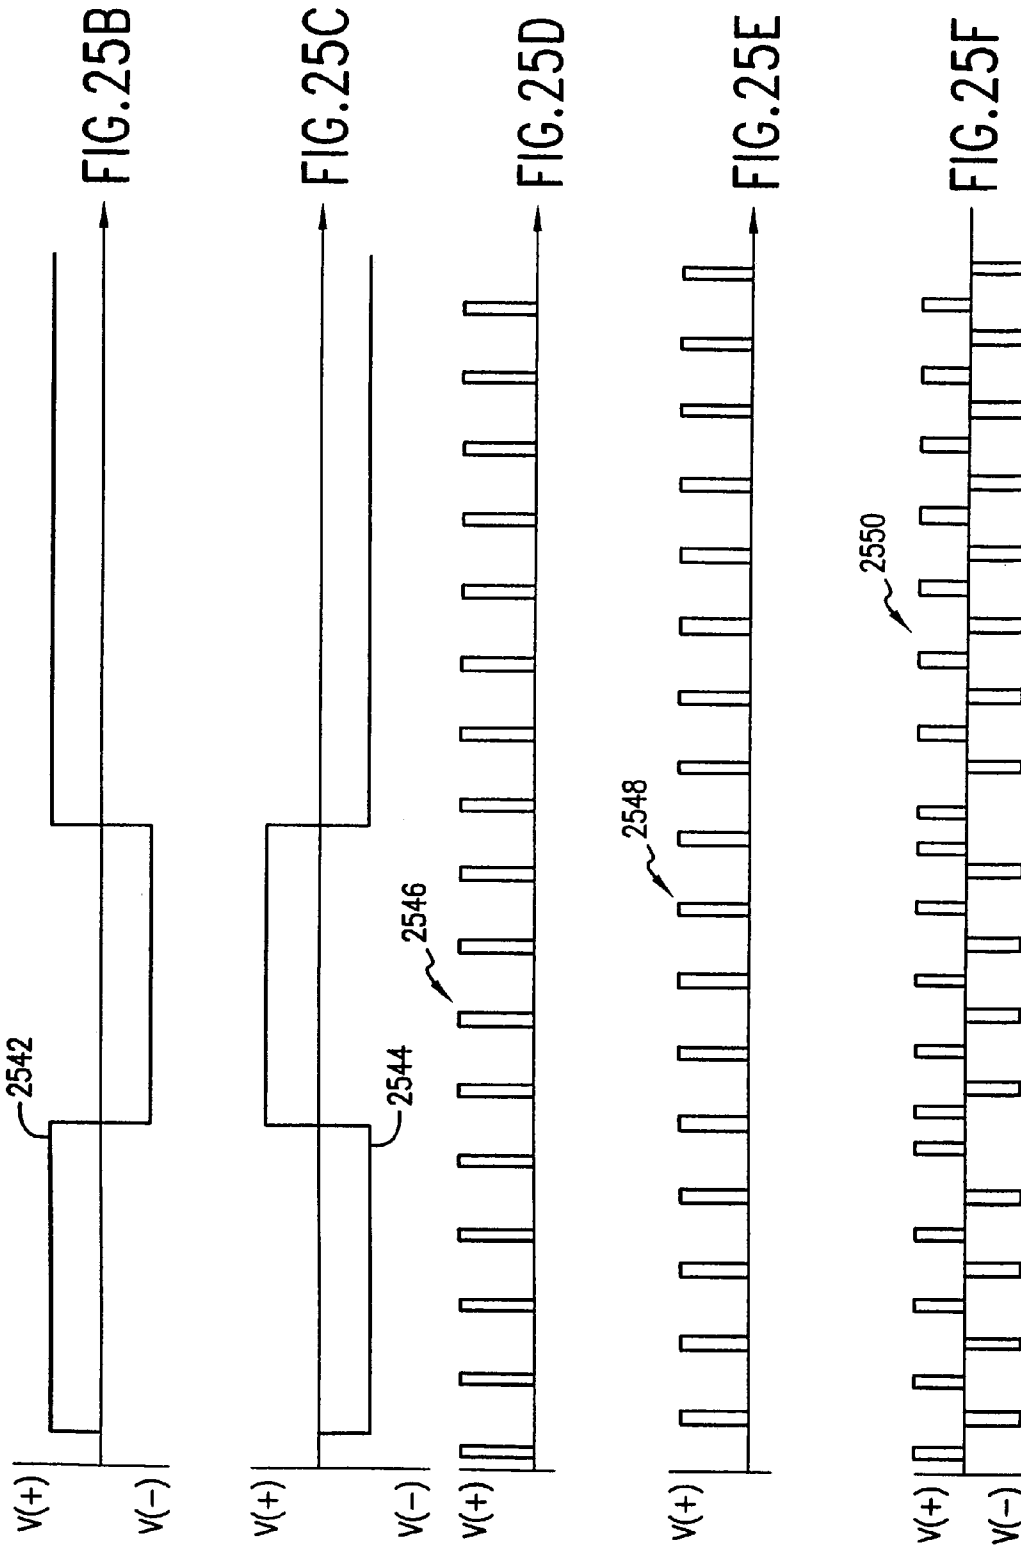


FIG. 25A



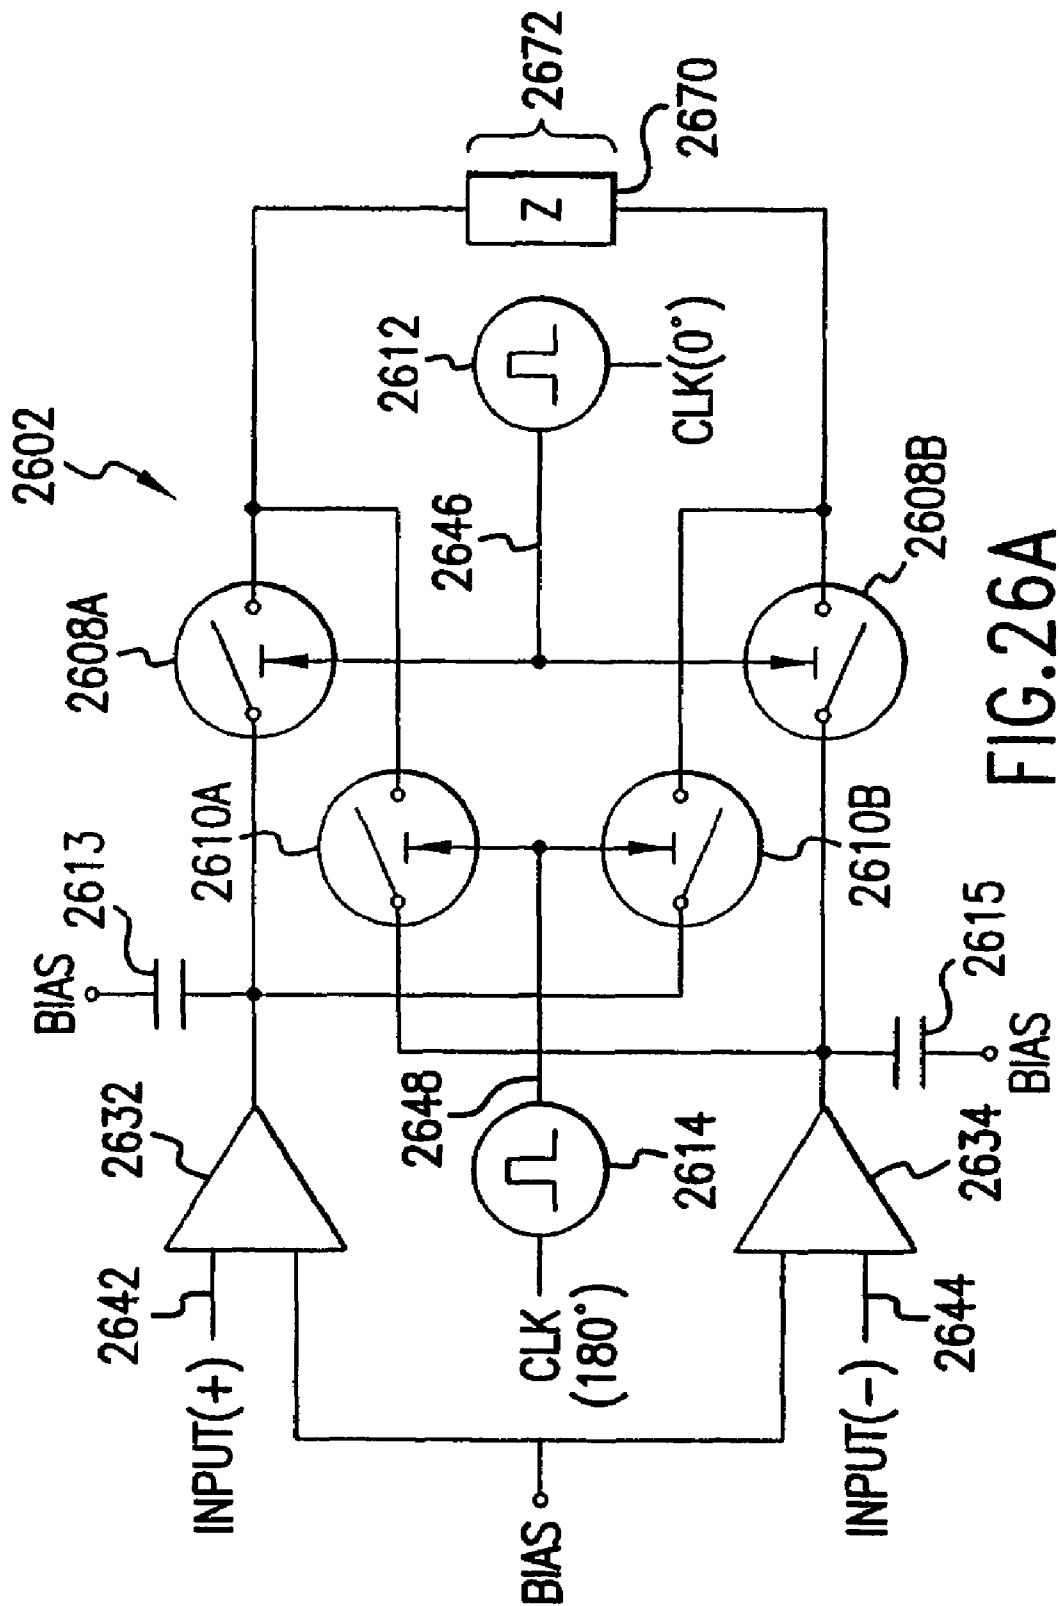
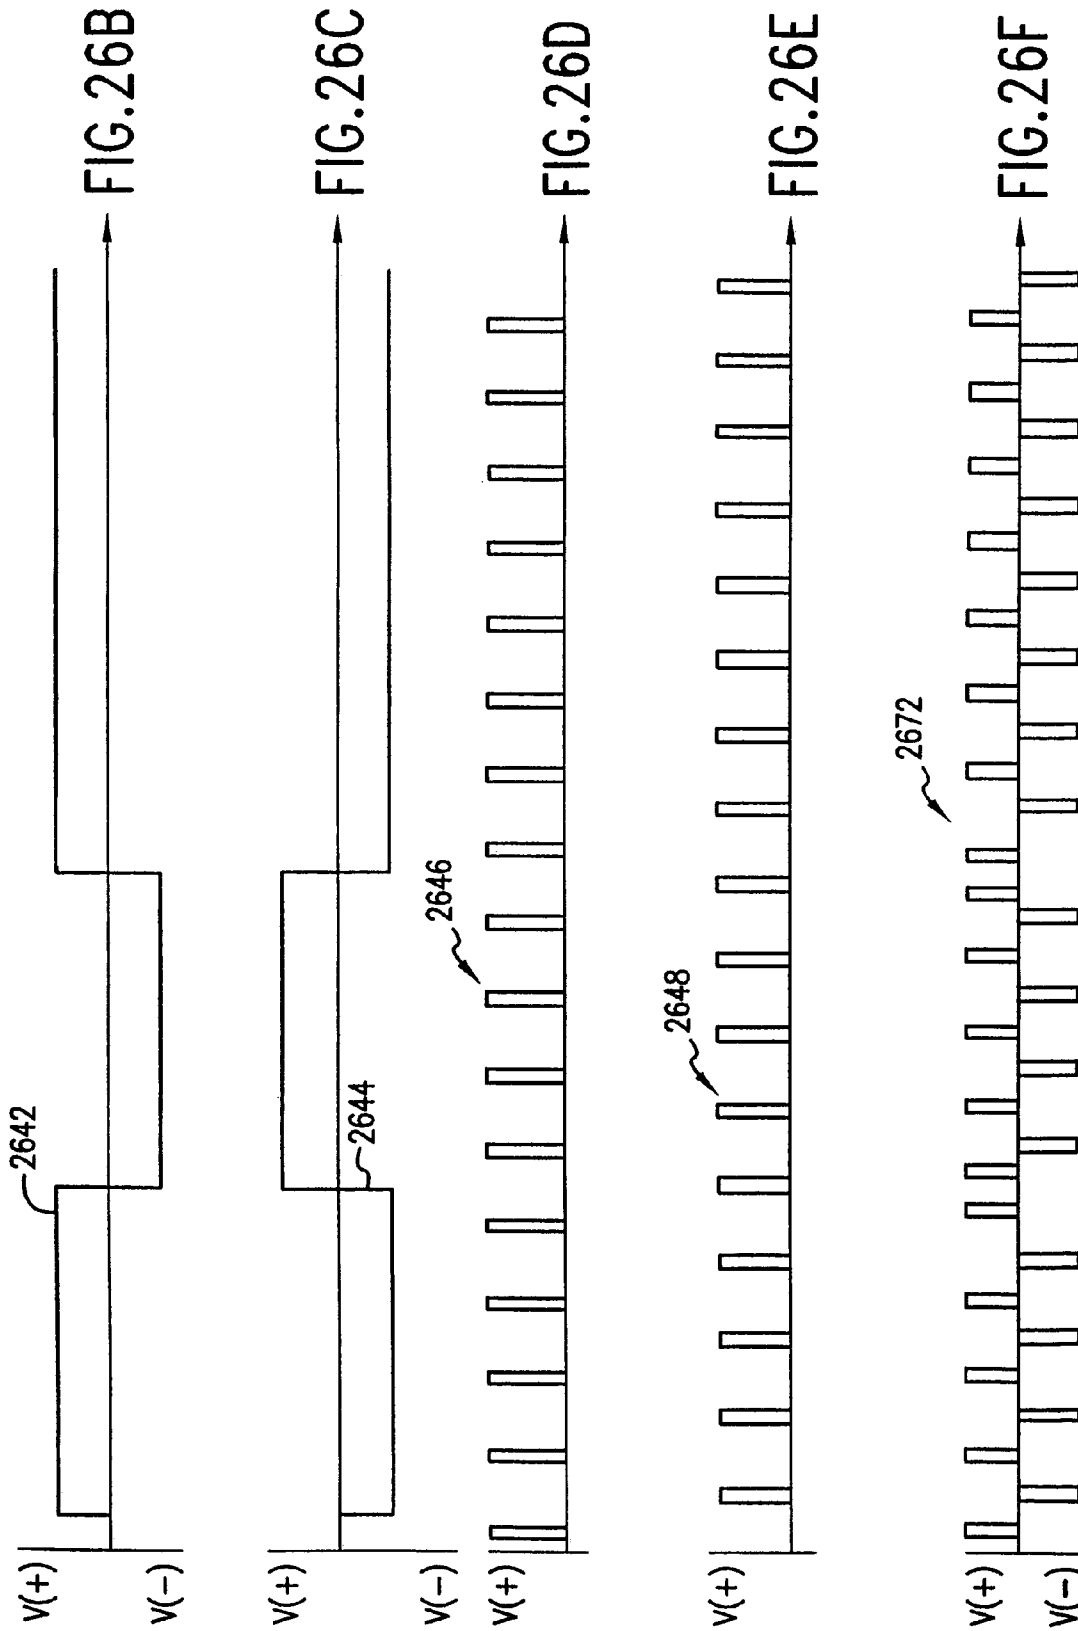


FIG. 26A



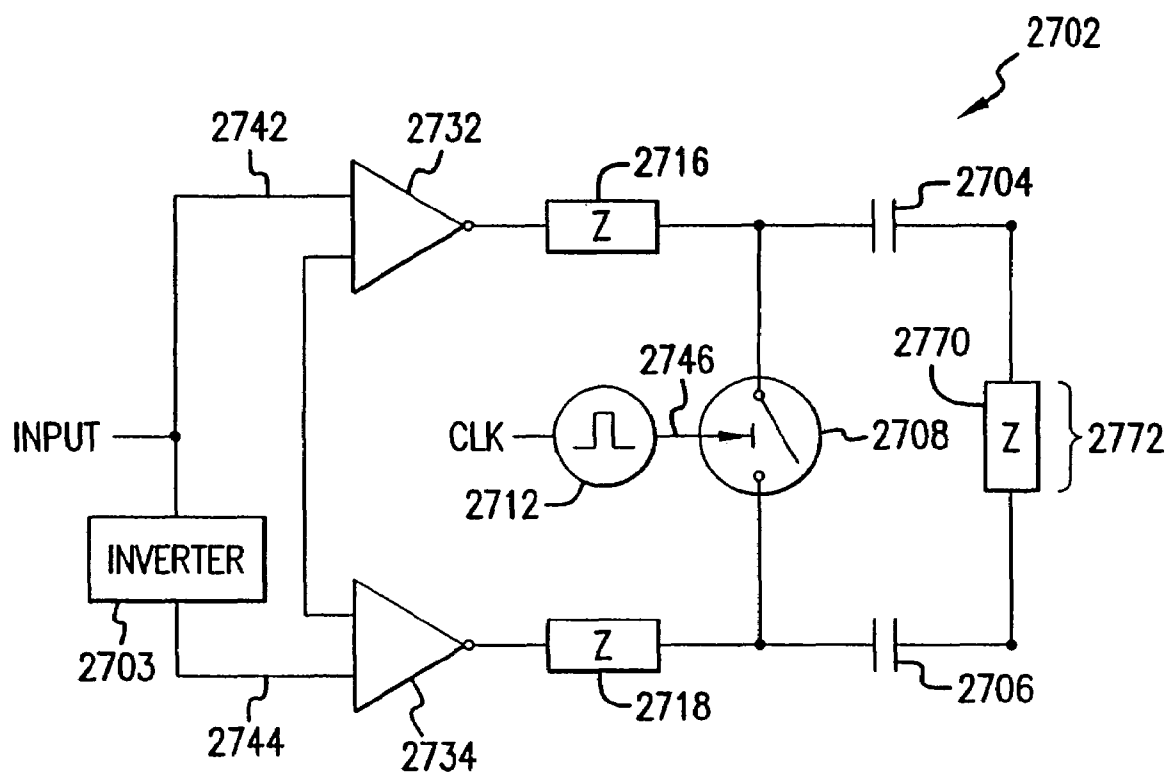
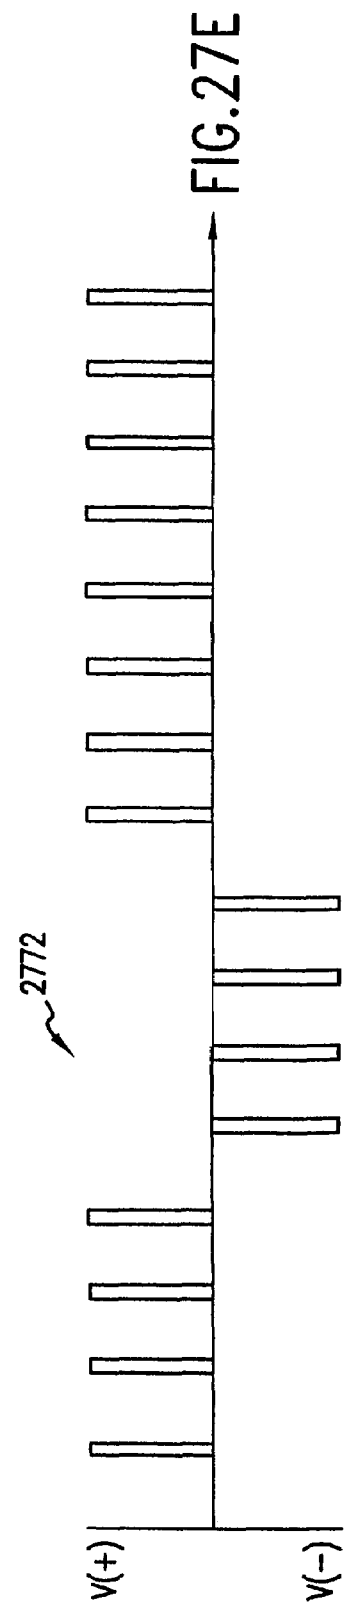
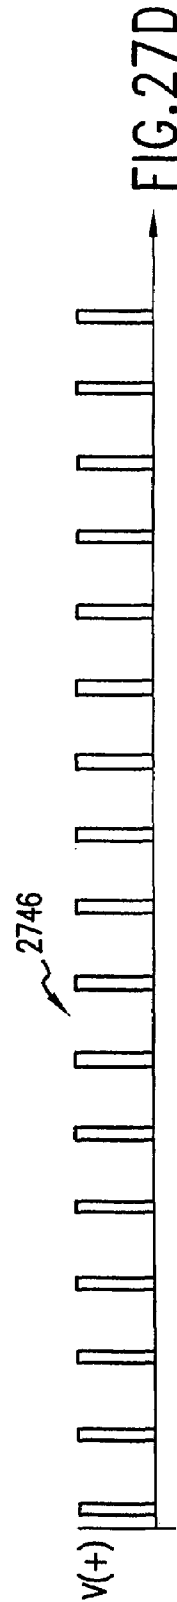
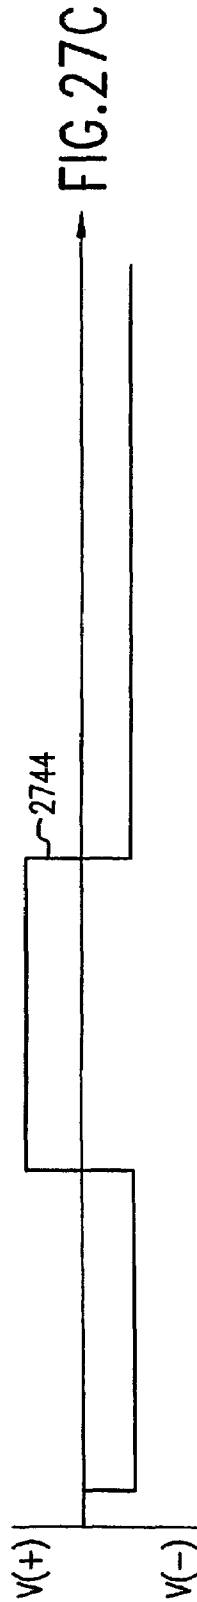
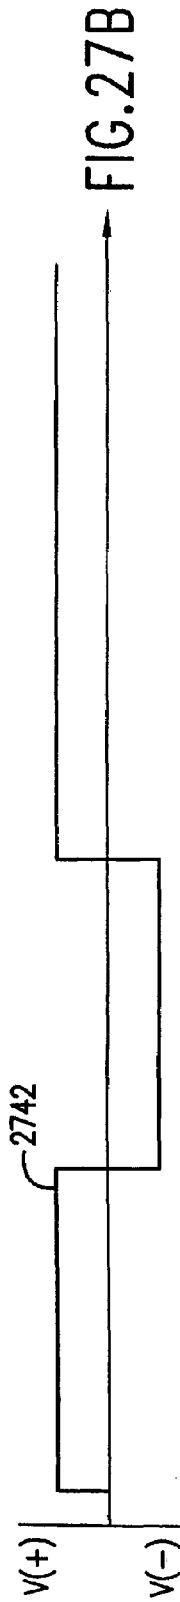


FIG.27A



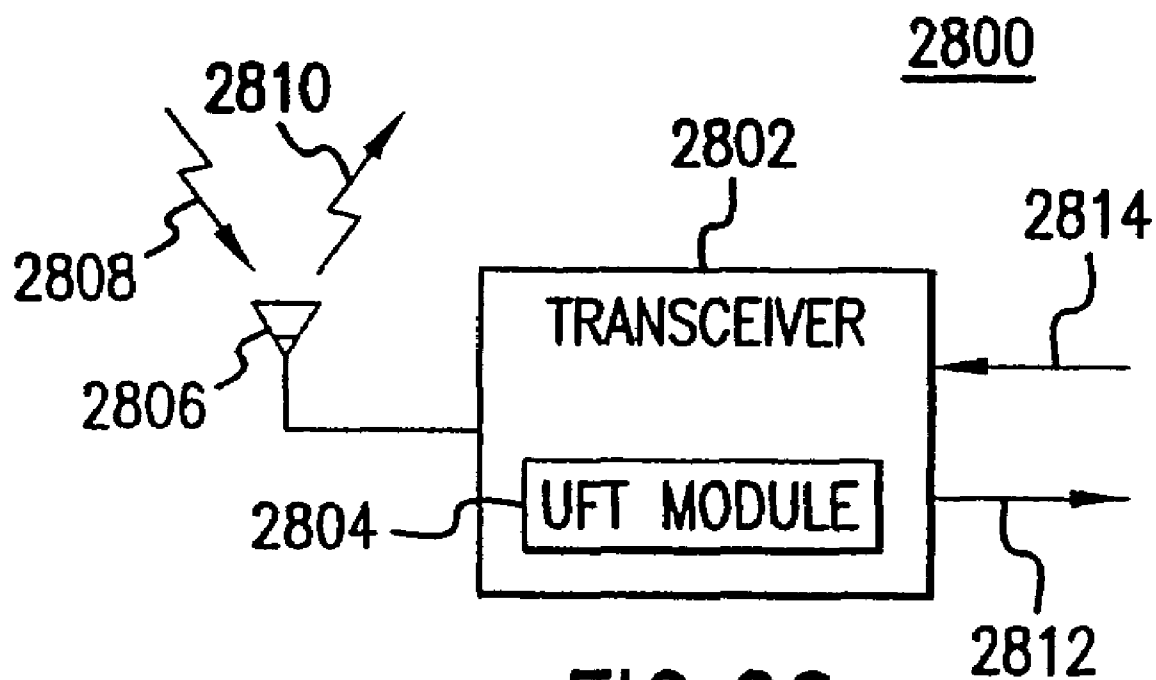


FIG.28

EXEMPLARY RECEIVER FOR
UNIVERSAL FREQUENCY DOWN-CONVERSION

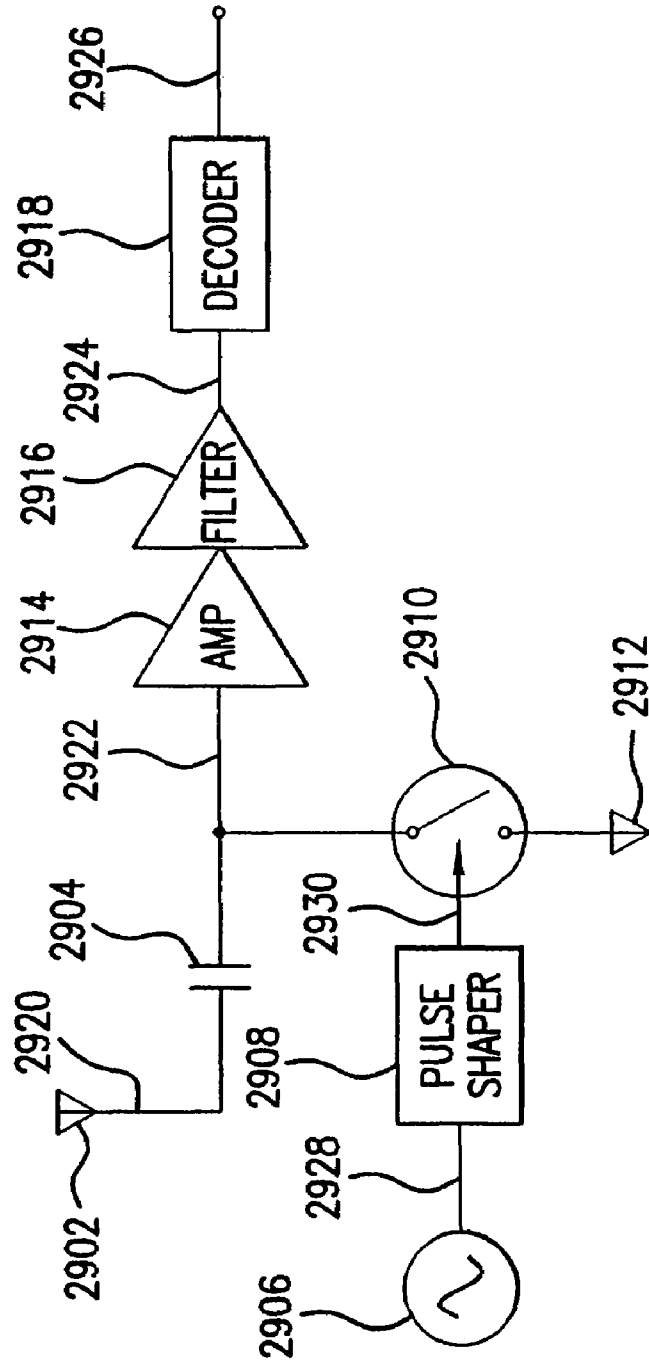


FIG. 29

EXEMPLARY TRANSMITTER USING
THE PRESENT INVENTION

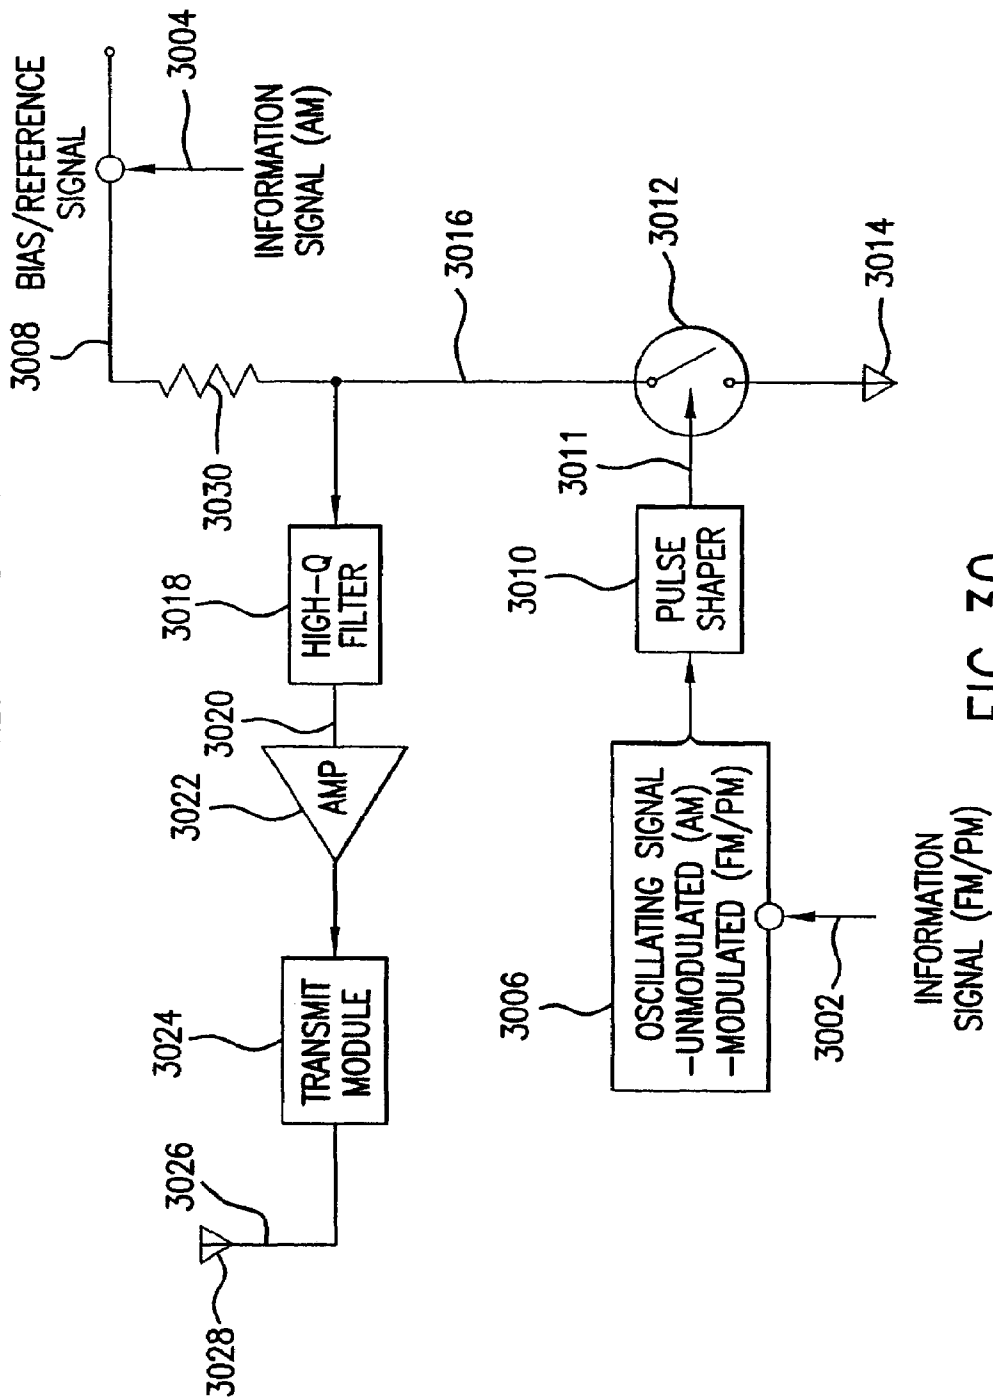
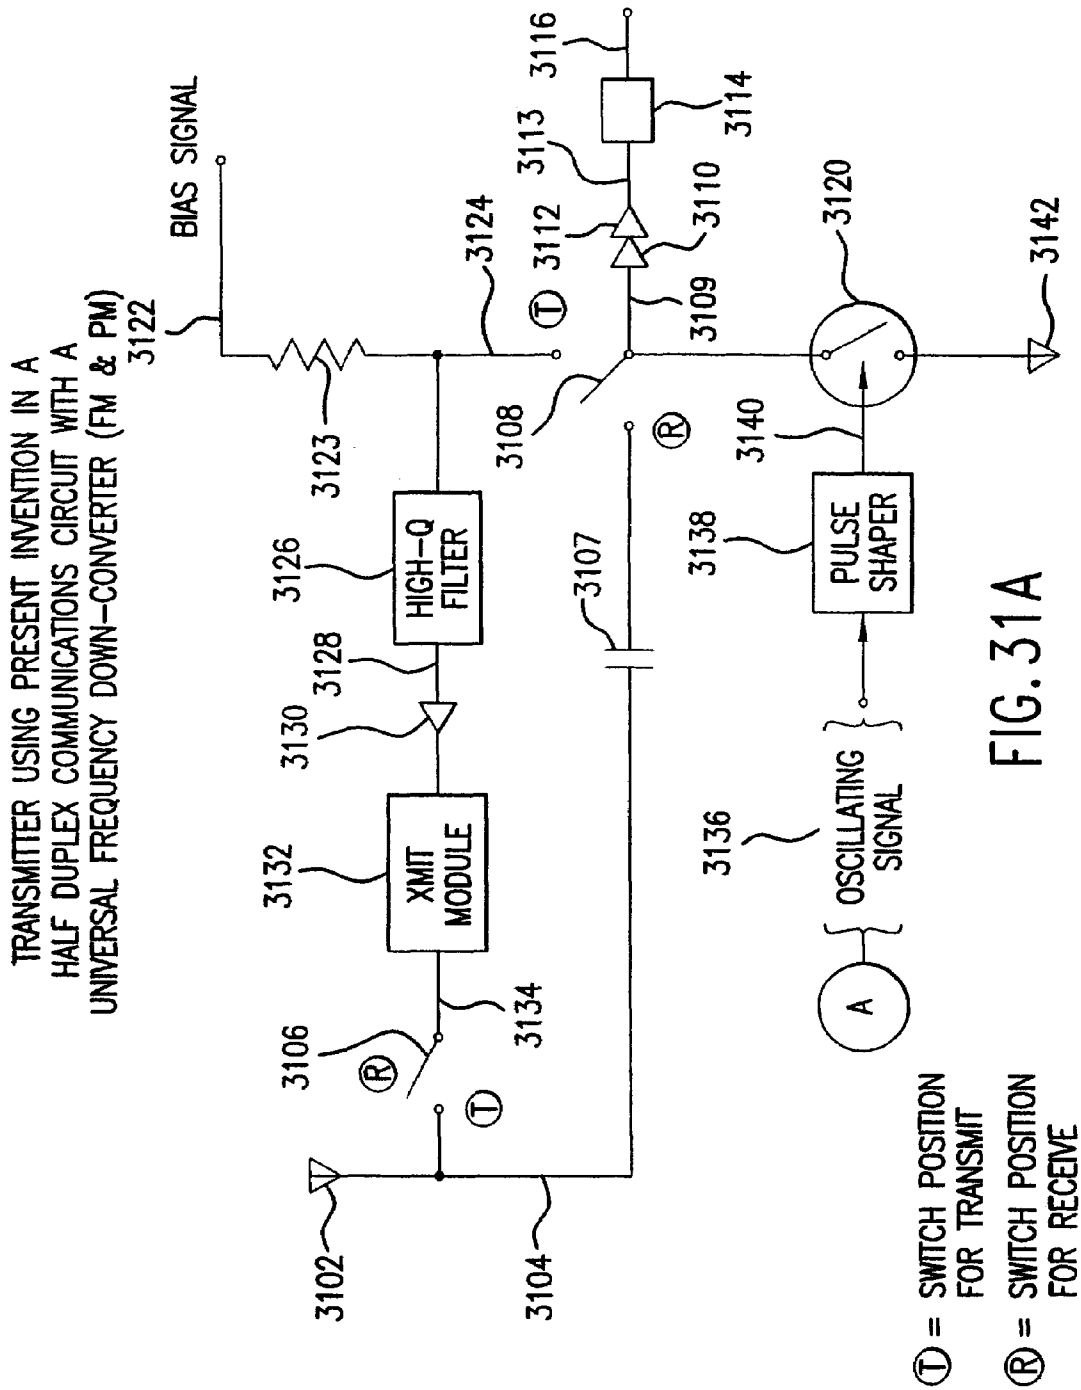


FIG. 30



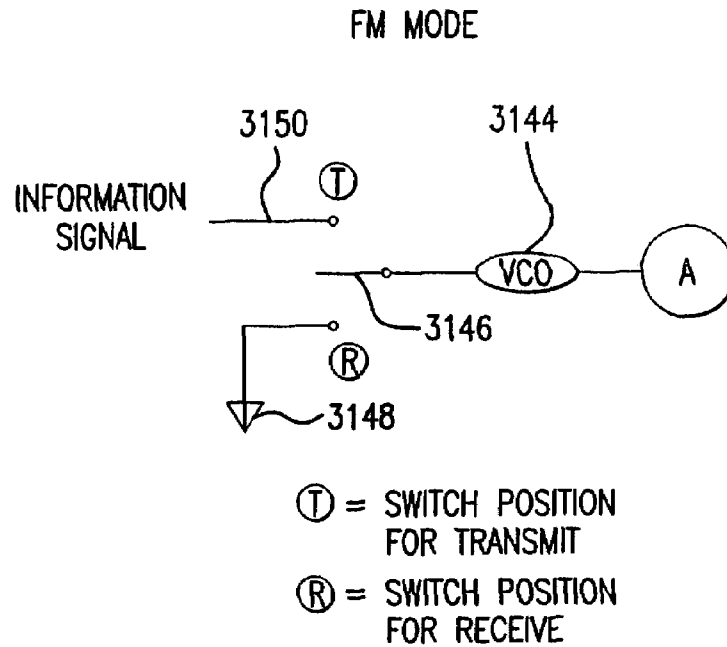


FIG. 31B

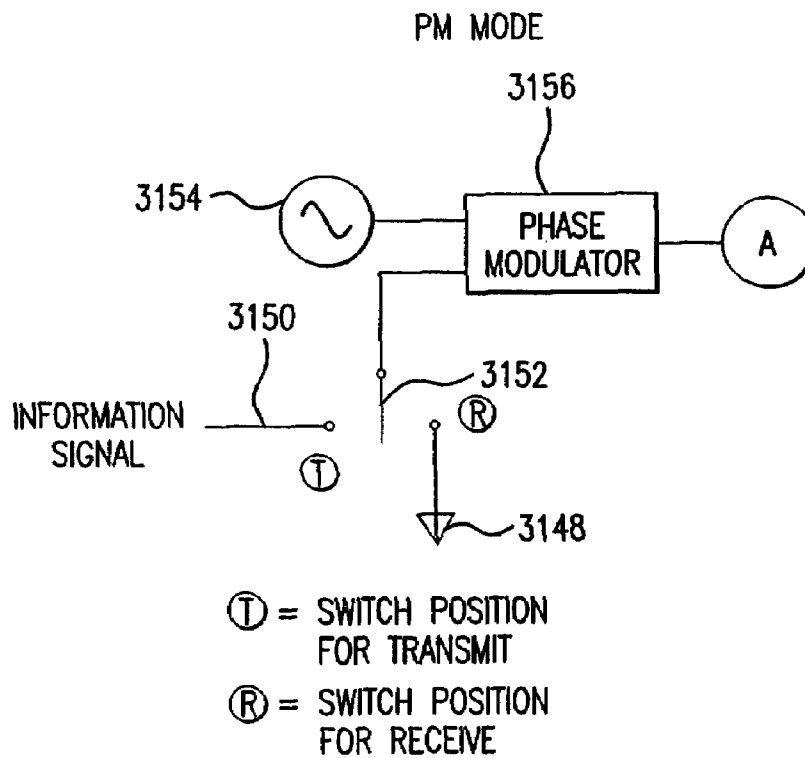
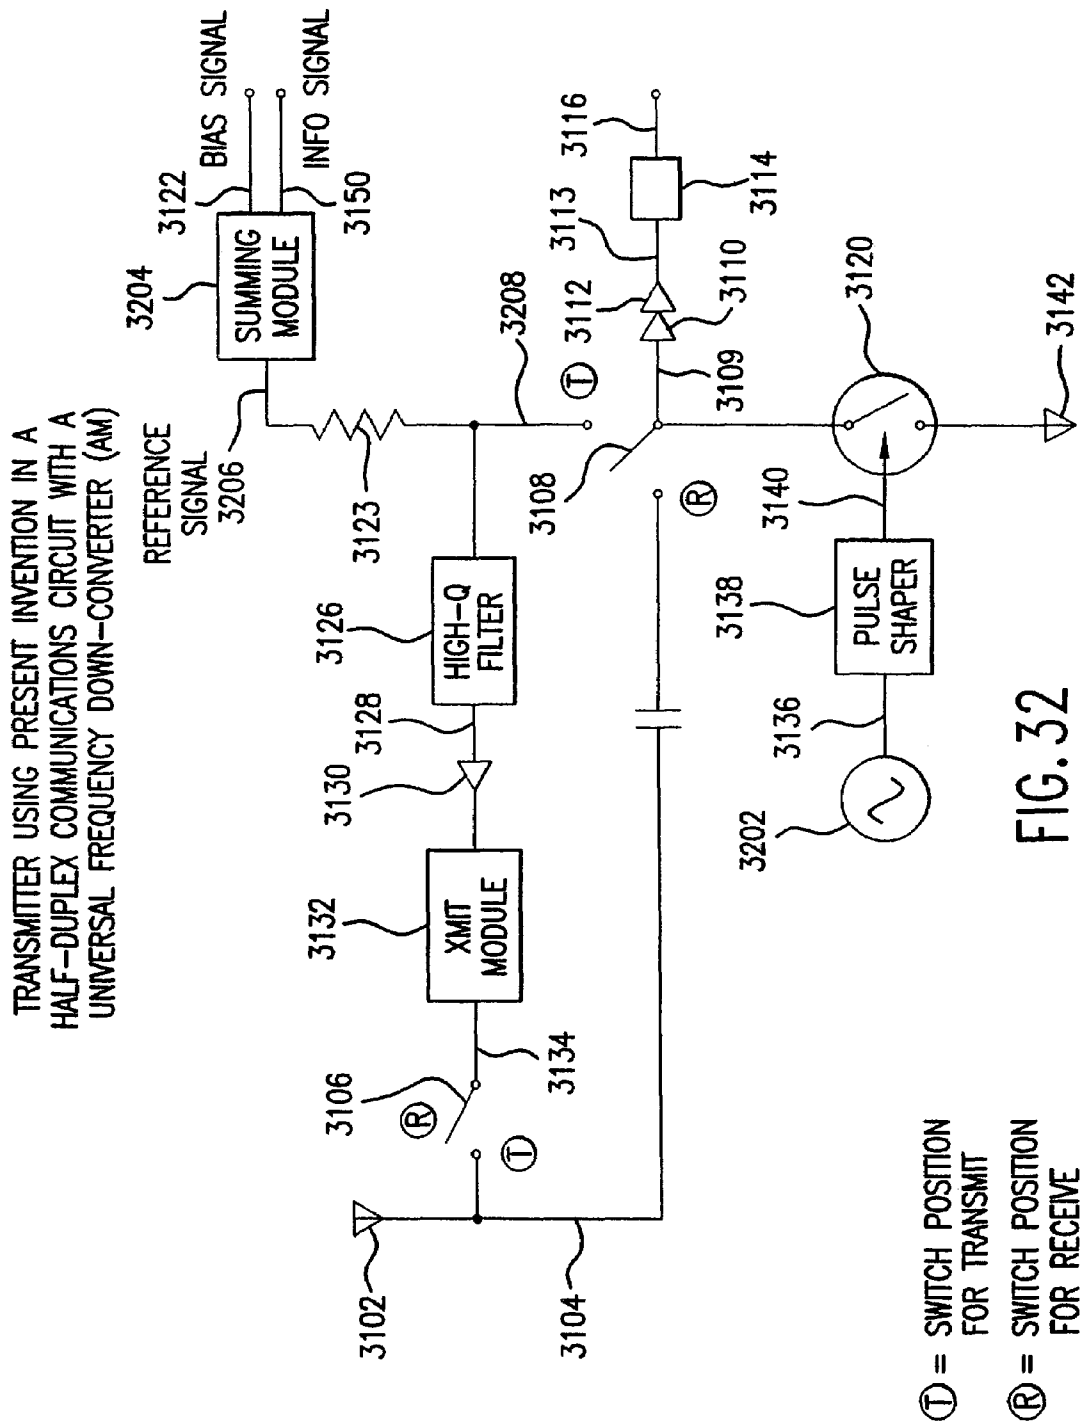


FIG. 31C



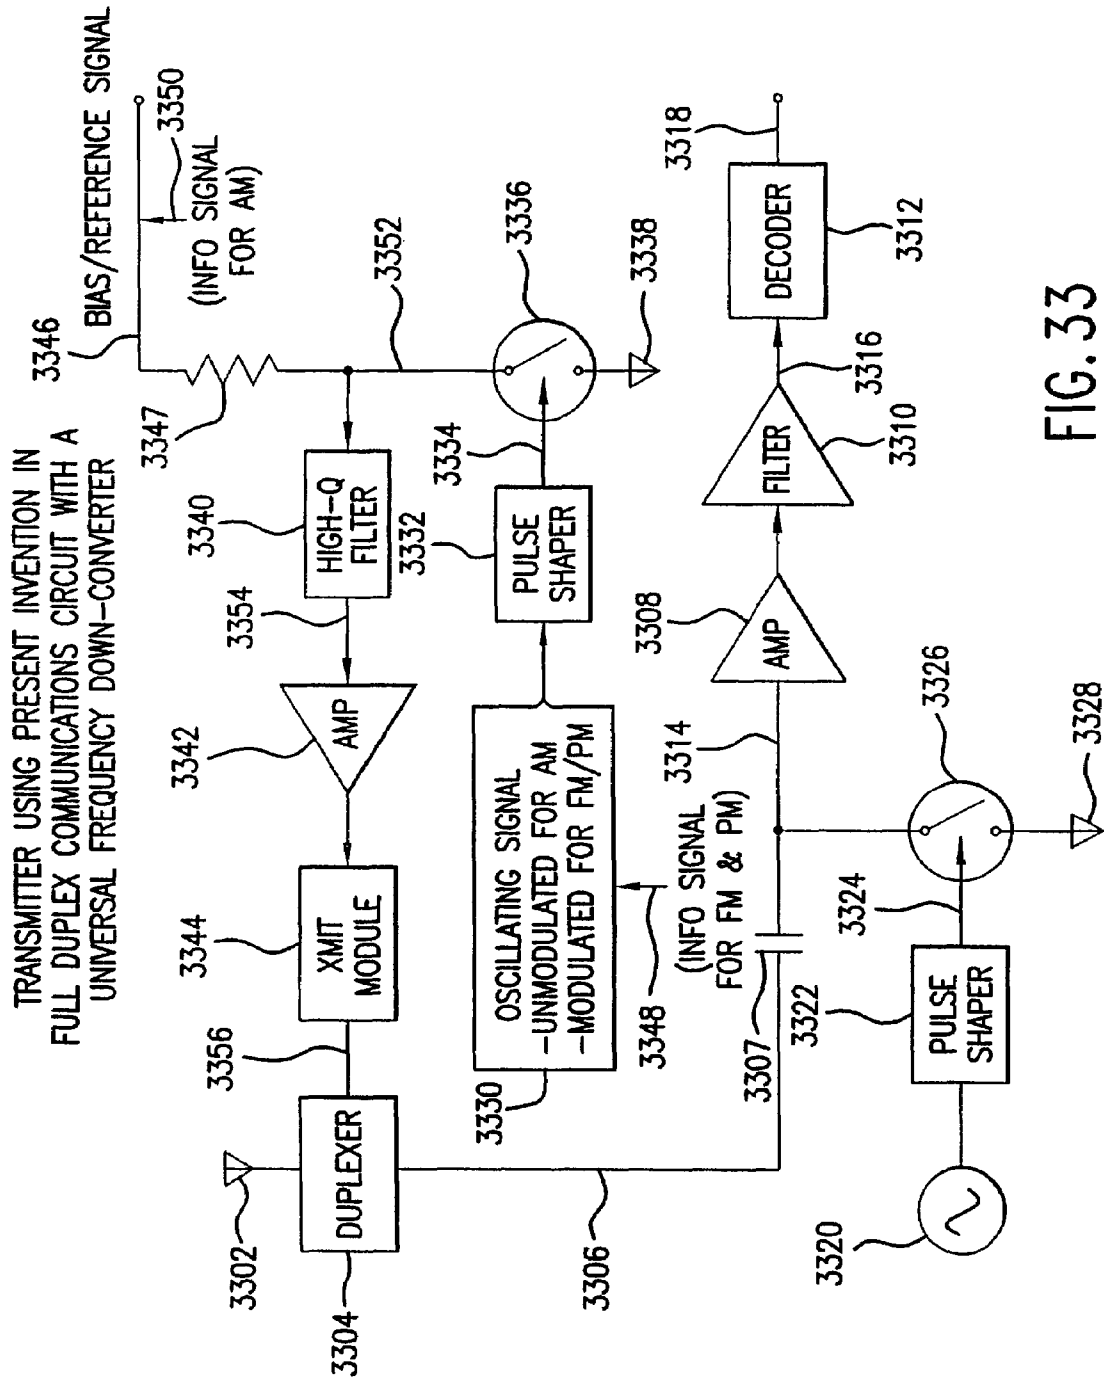


FIG. 33

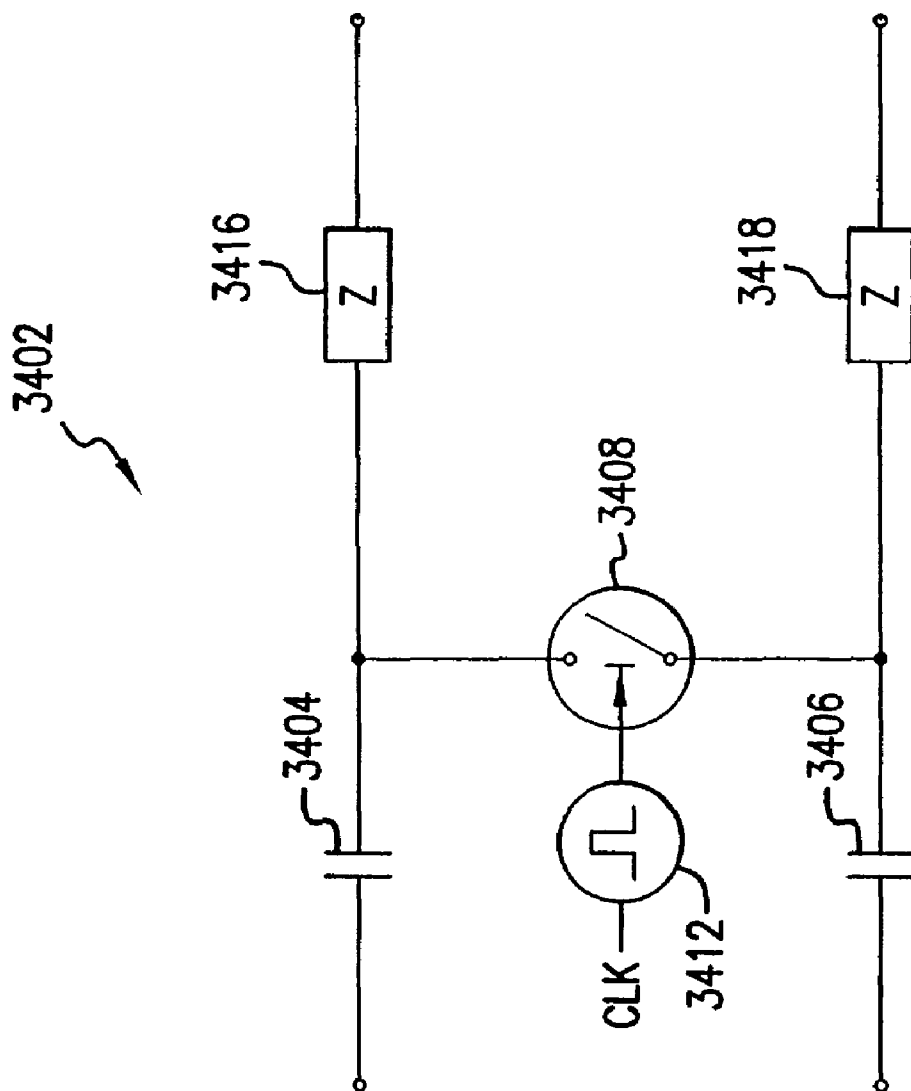


FIG. 34

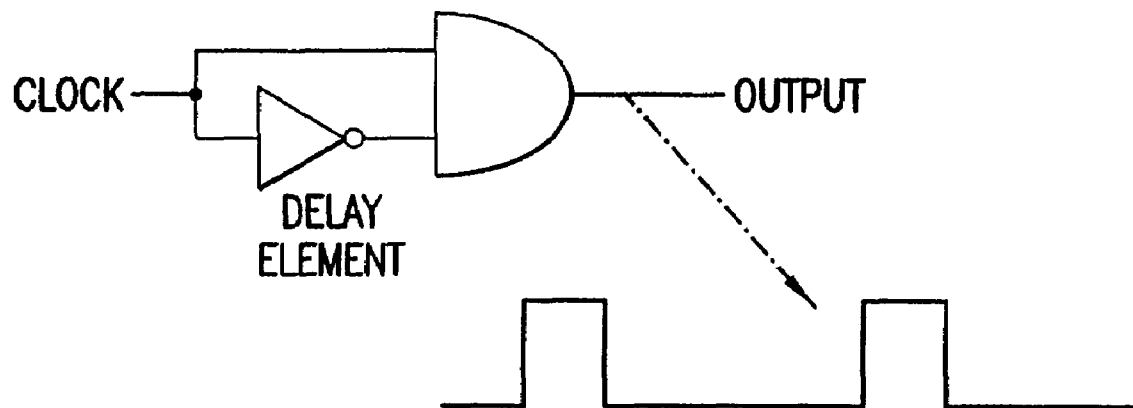
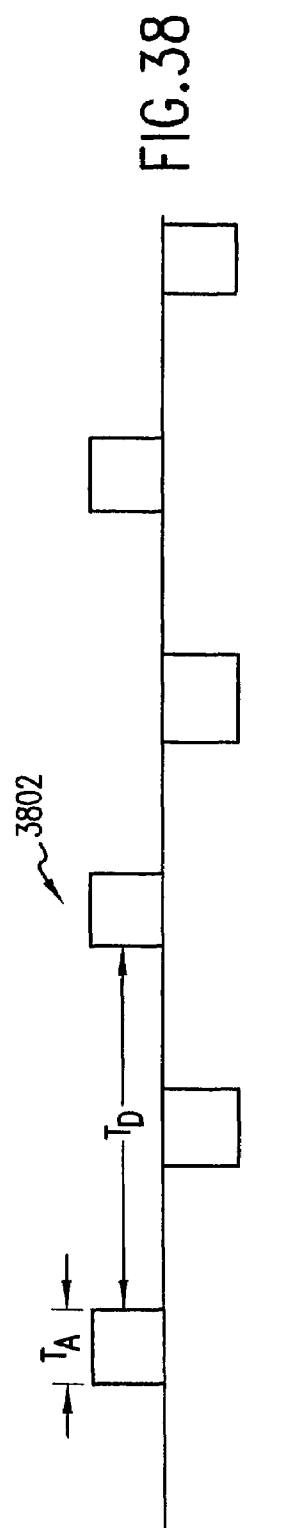
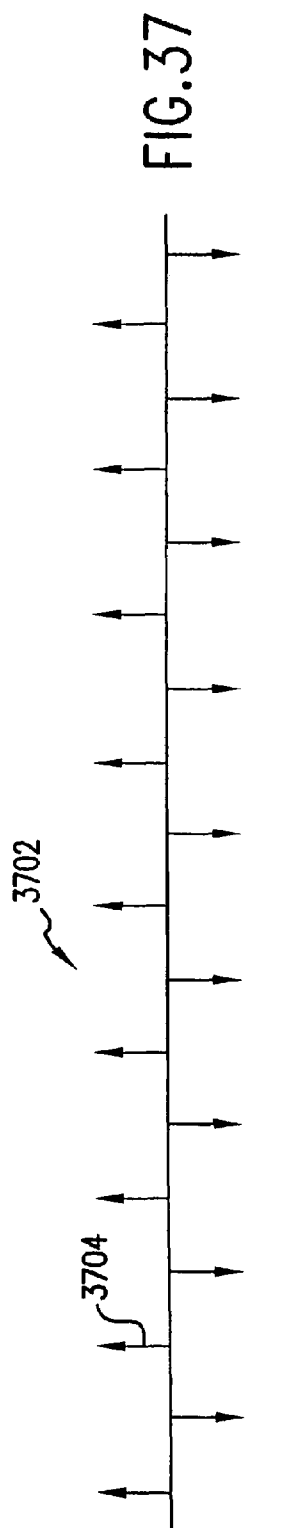
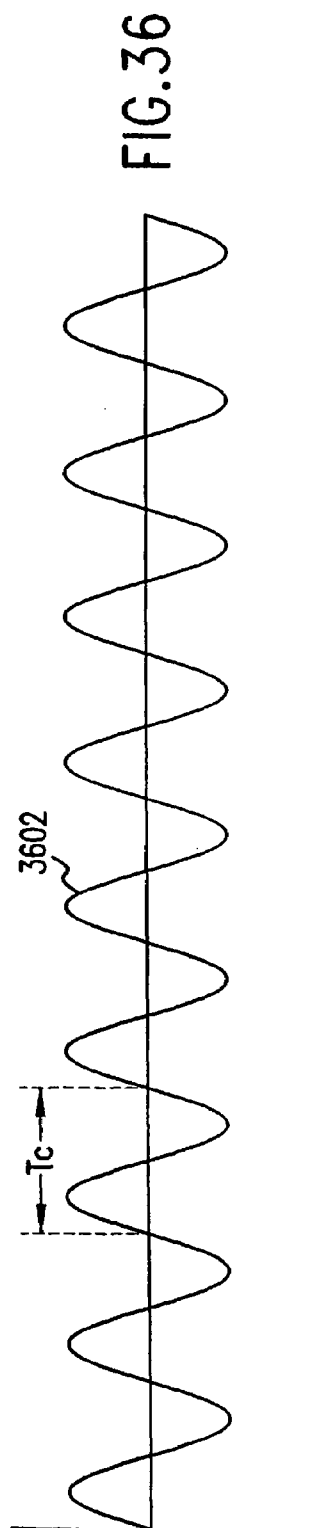
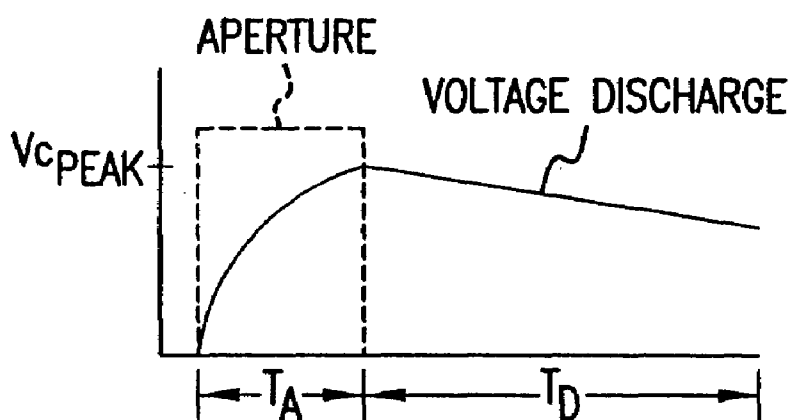
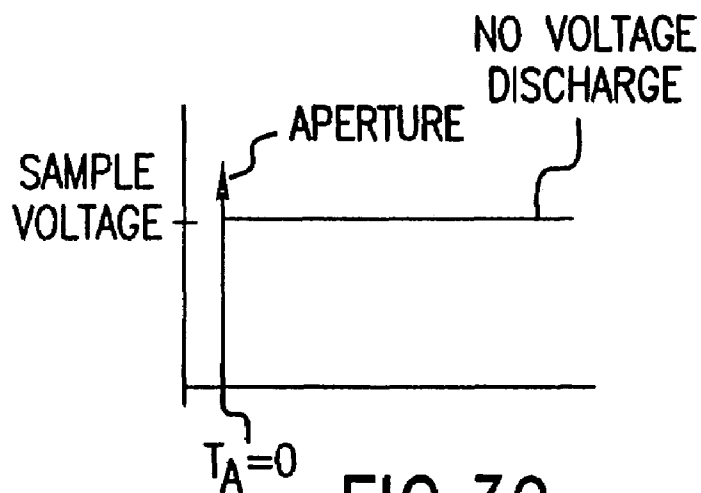


FIG.35





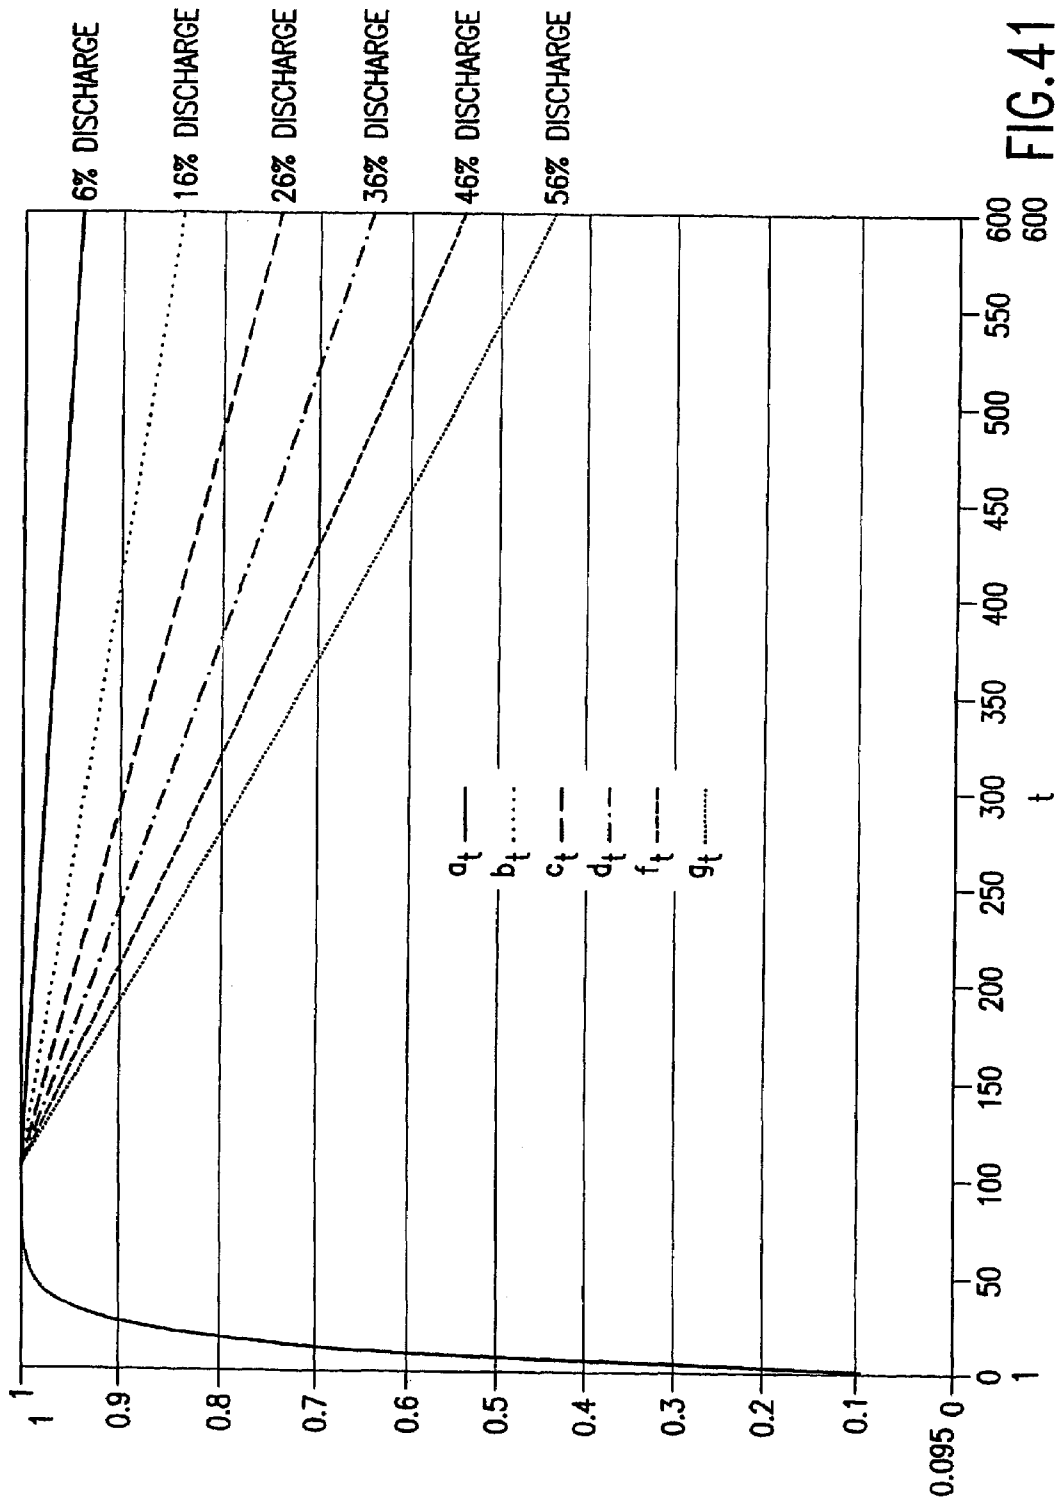


FIG. 41

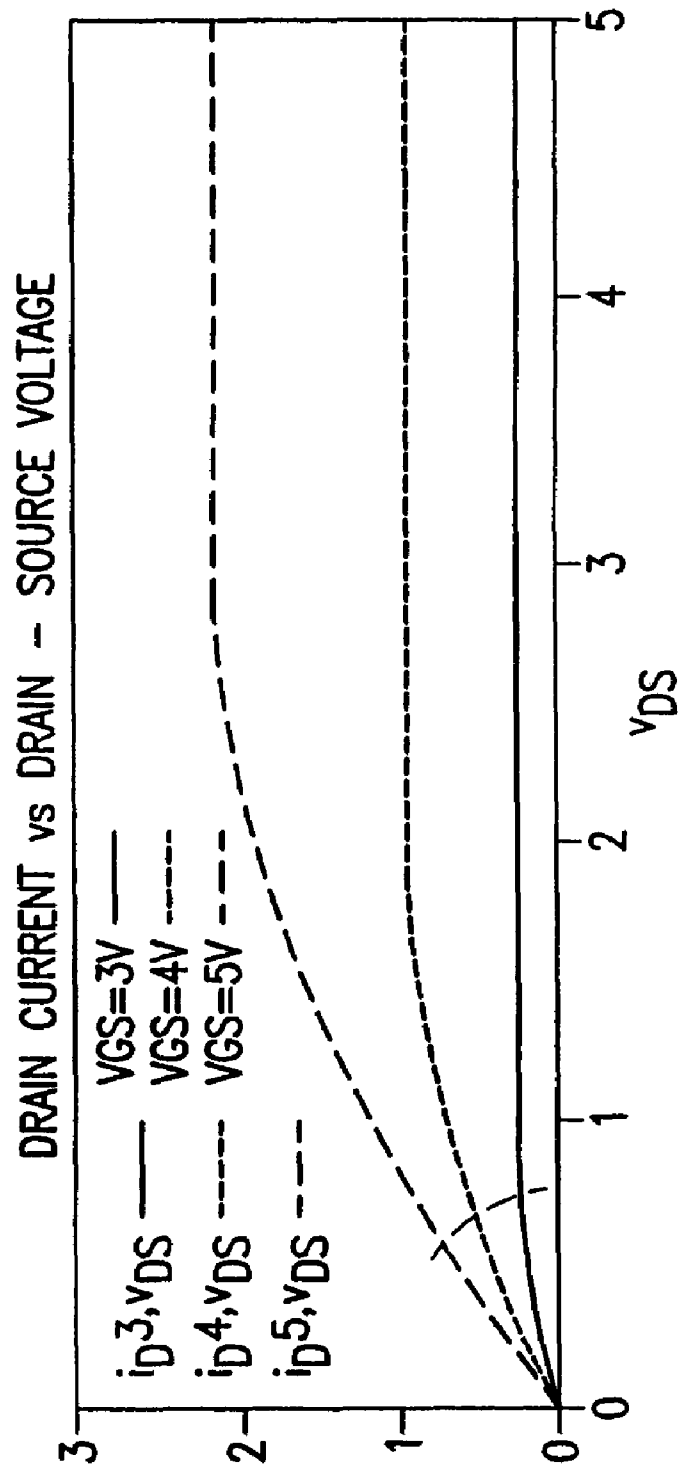
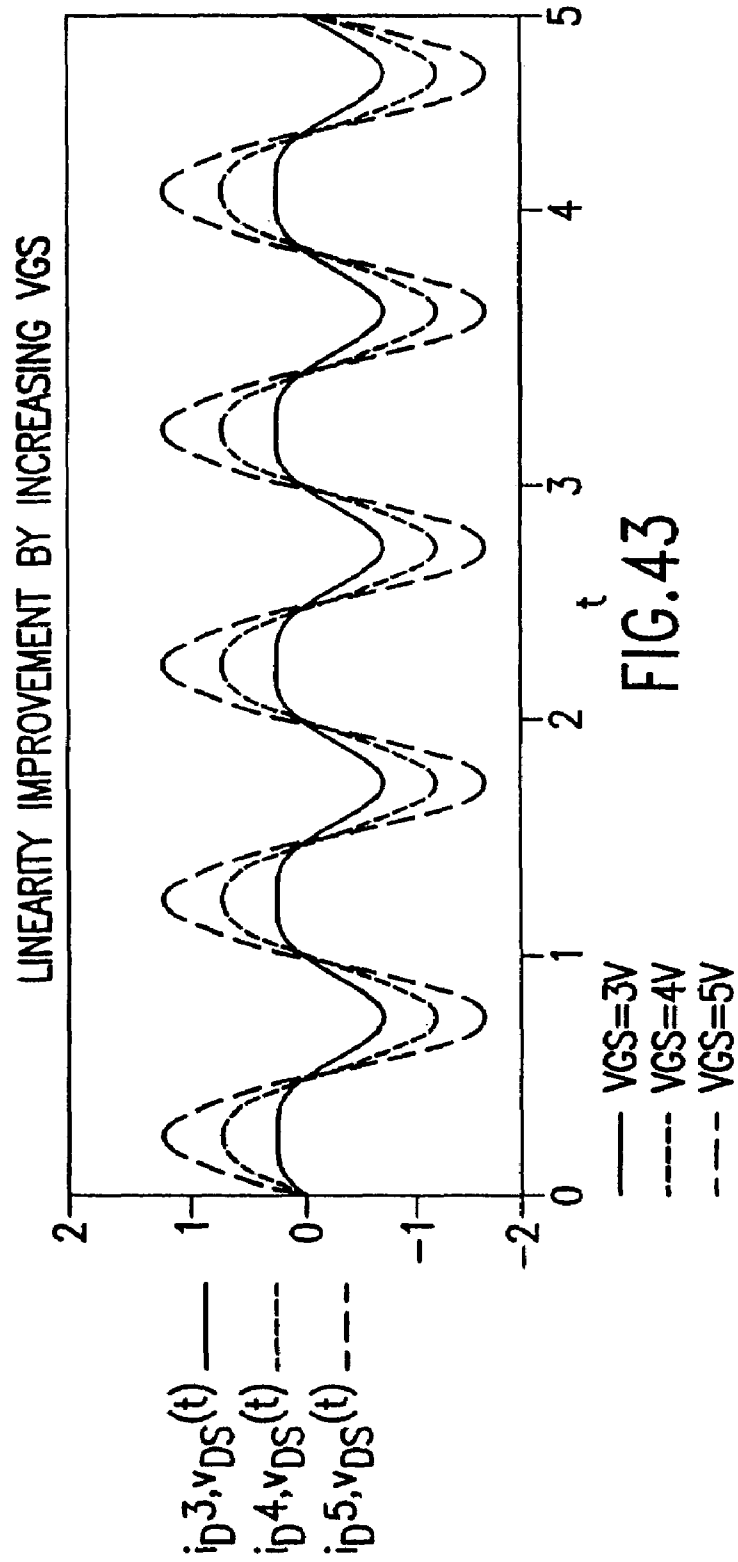


FIG. 42



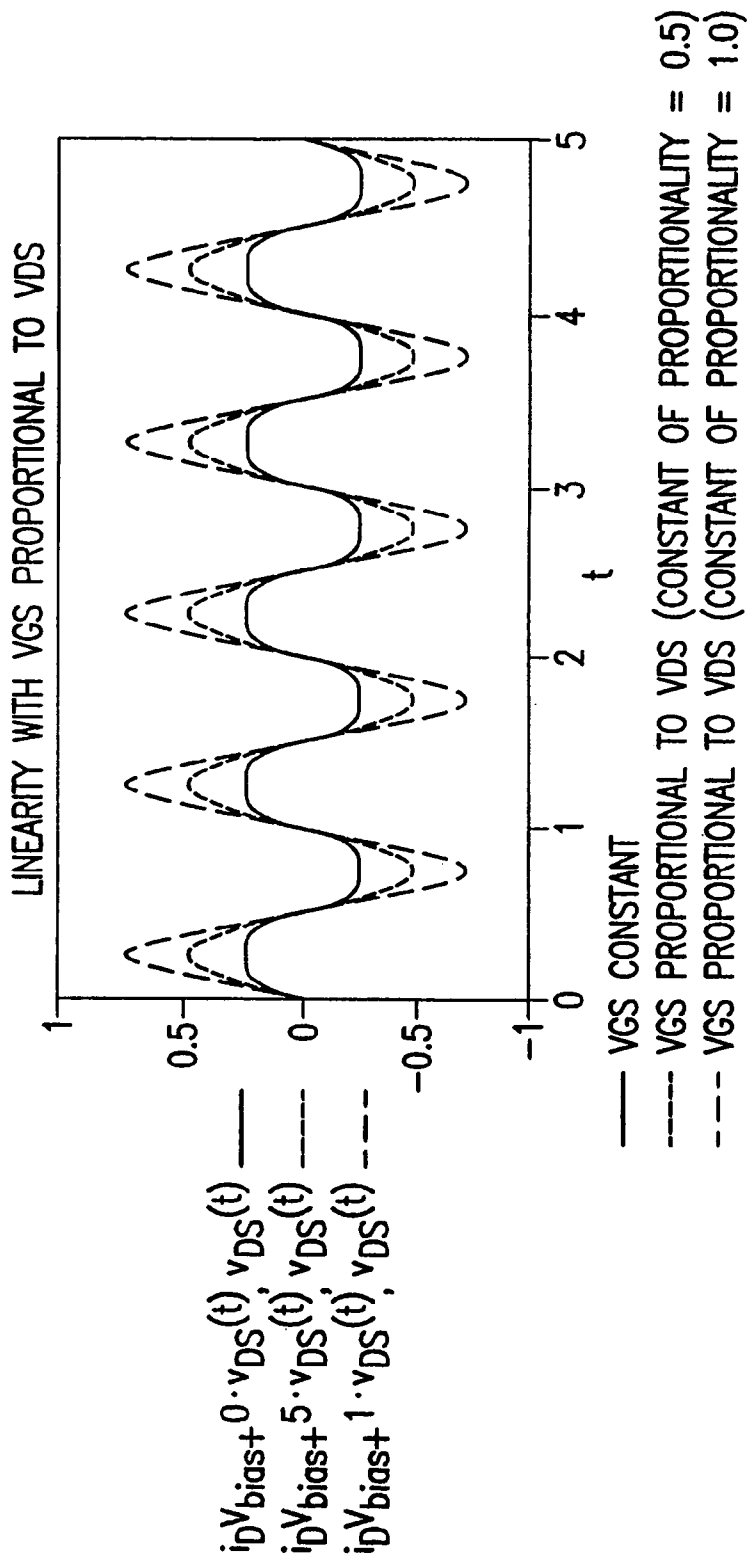


FIG.44

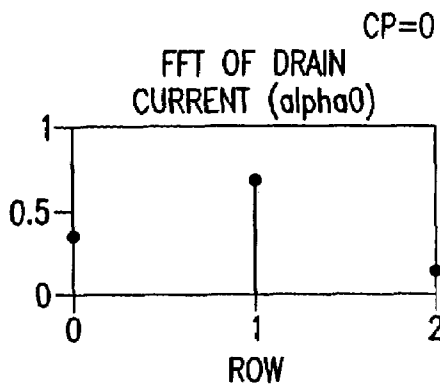


FIG.45A

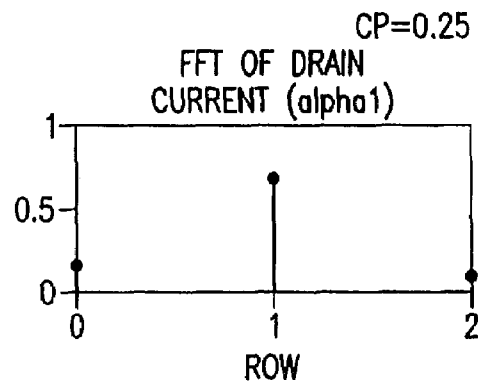


FIG.45B

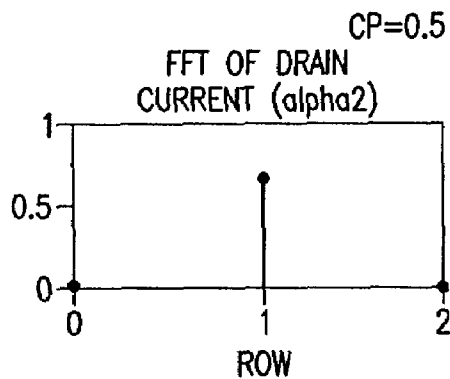


FIG.45C

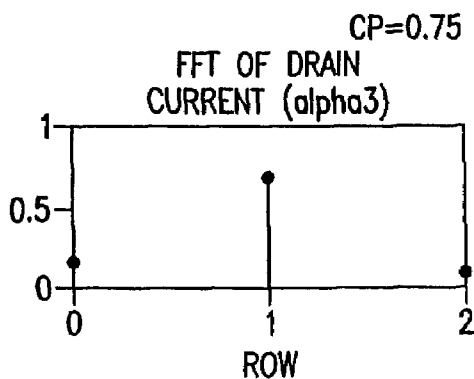


FIG.45D

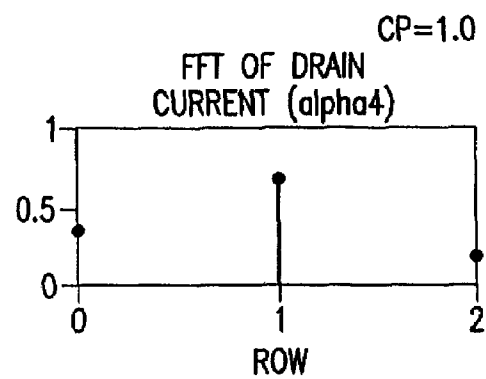
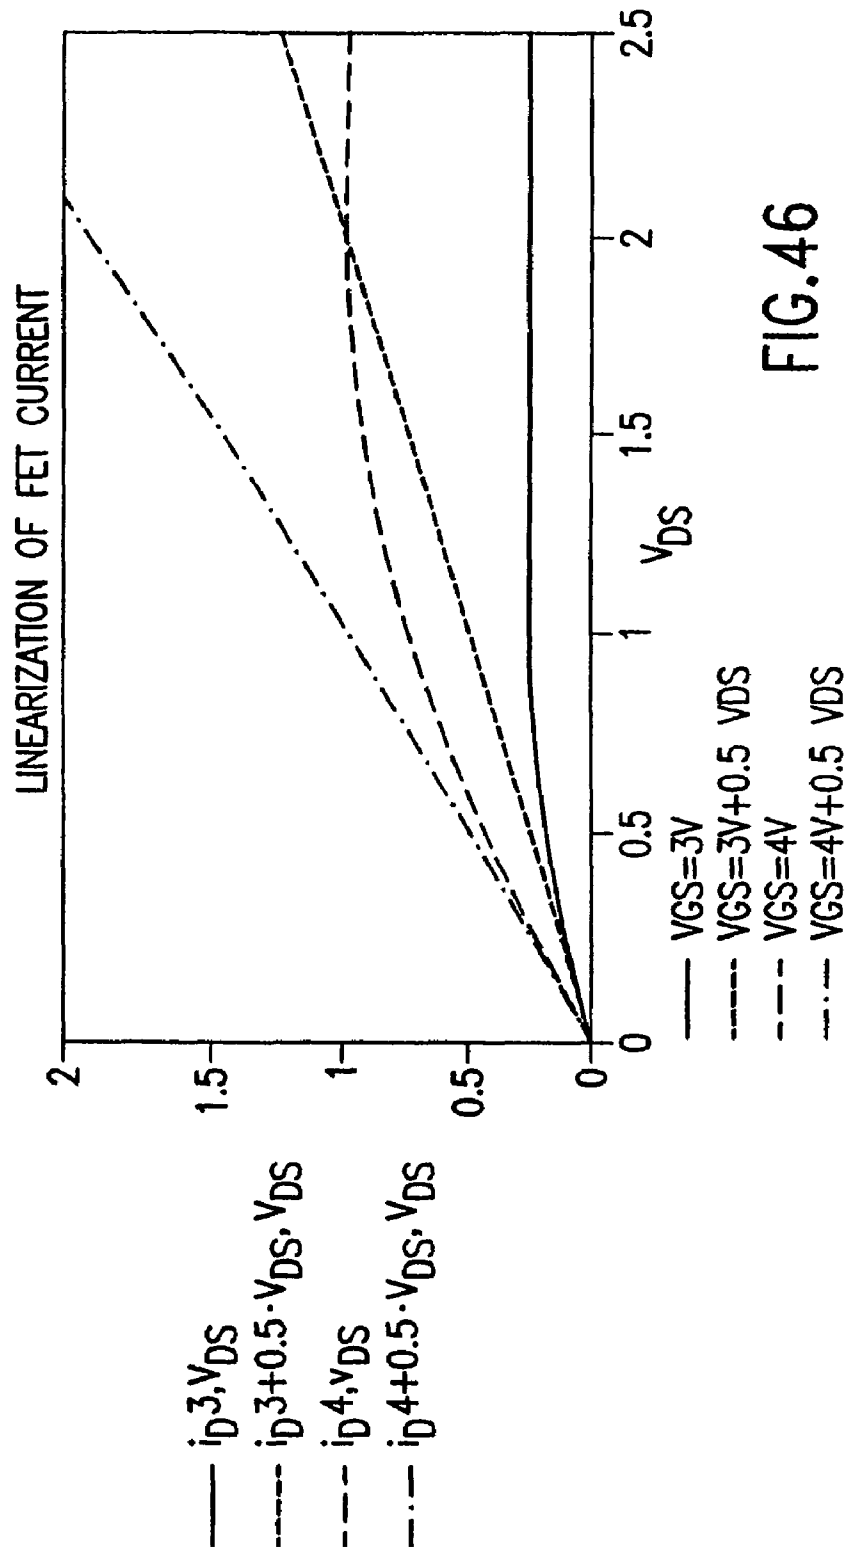


FIG.45E



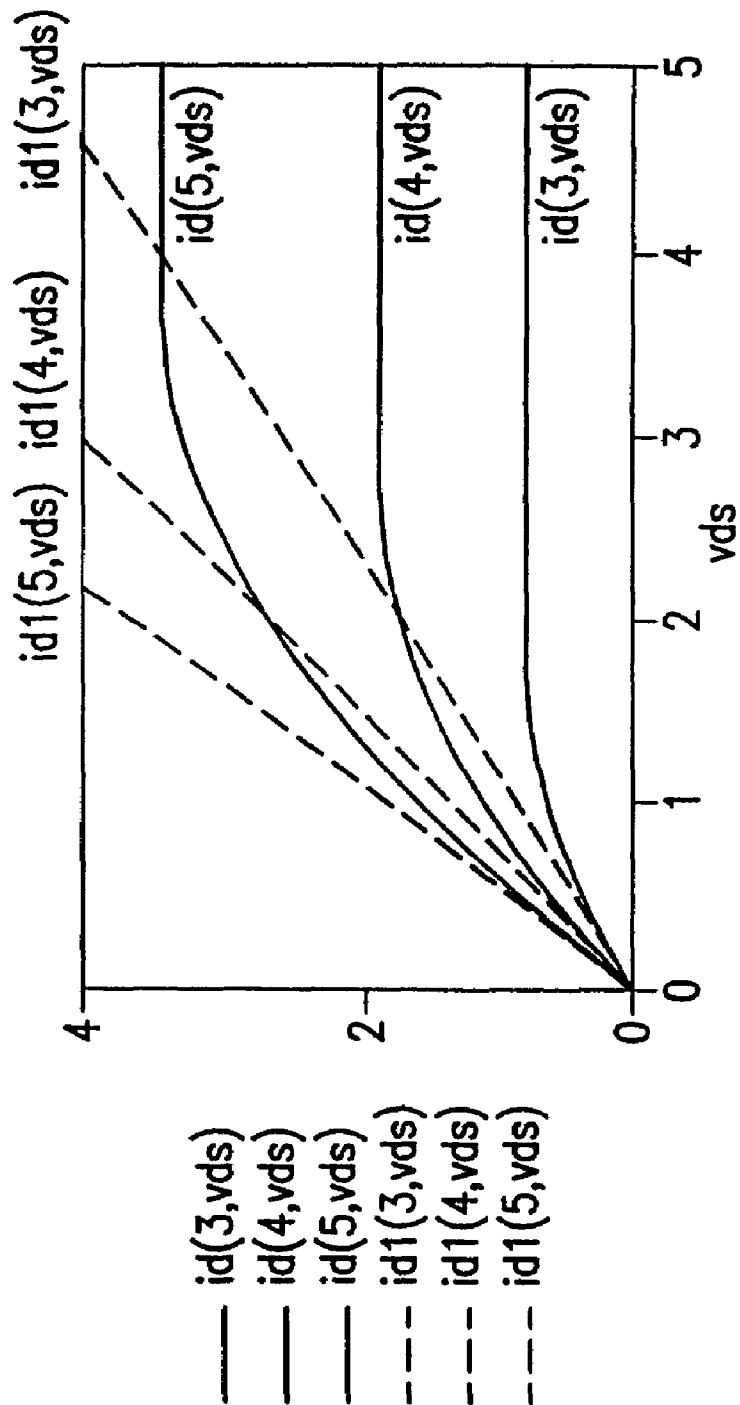


FIG. 47

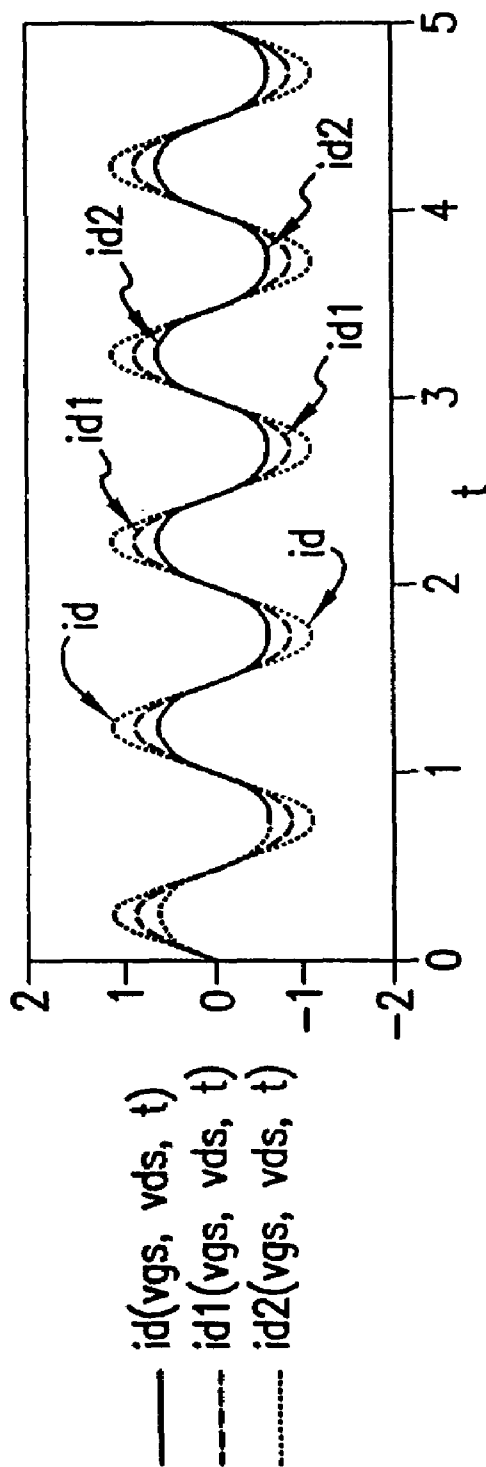


FIG. 48





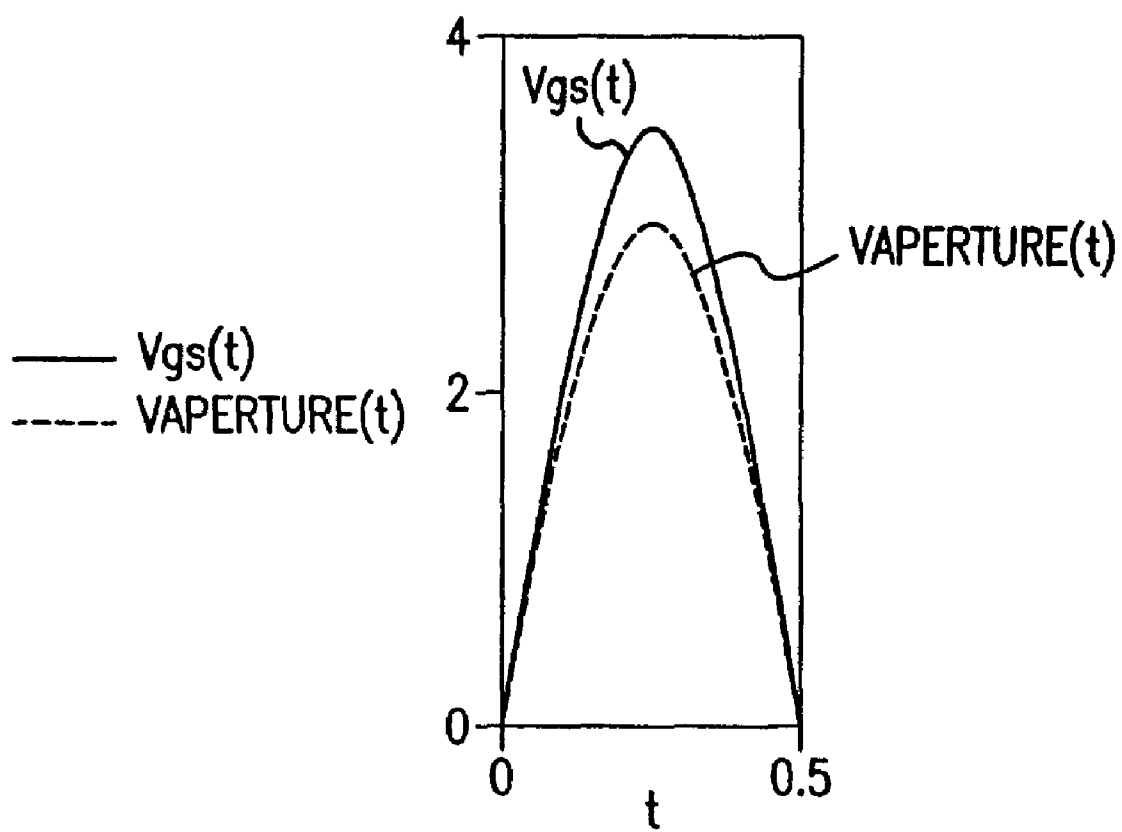


FIG.49

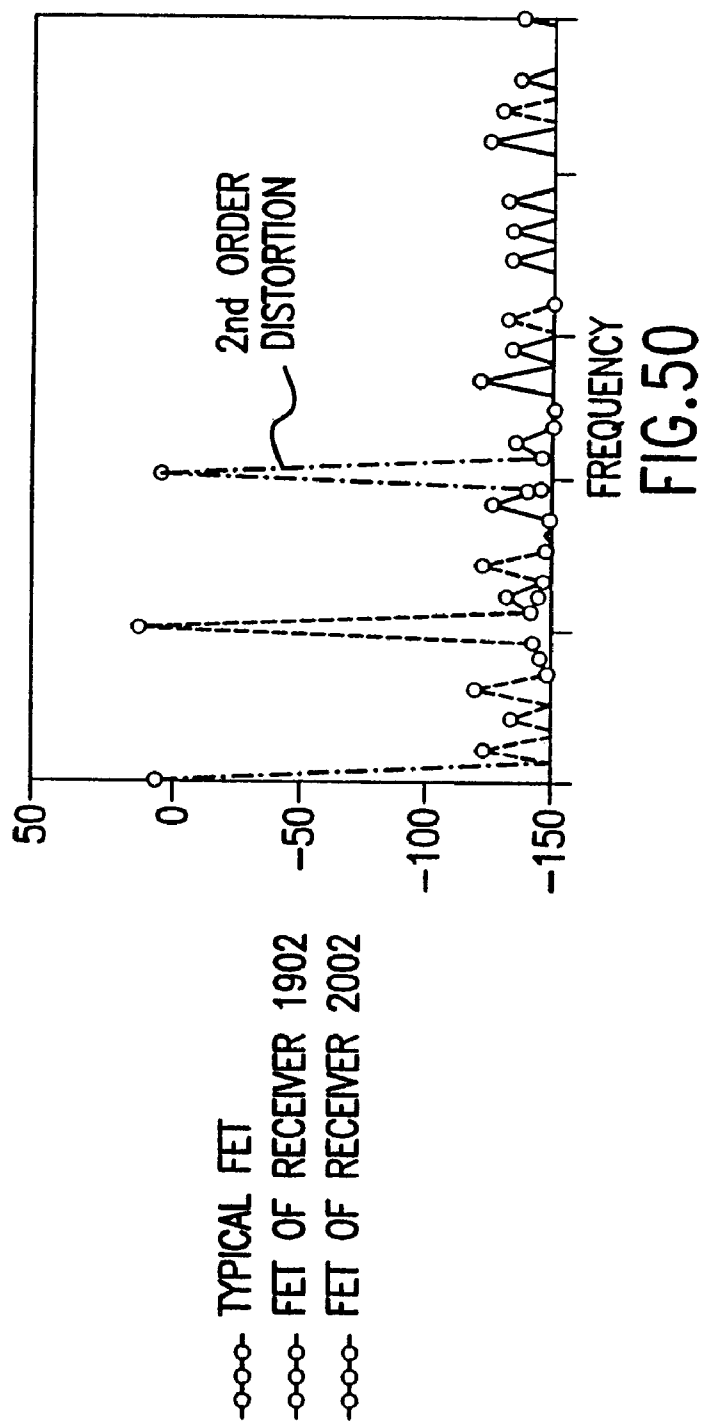

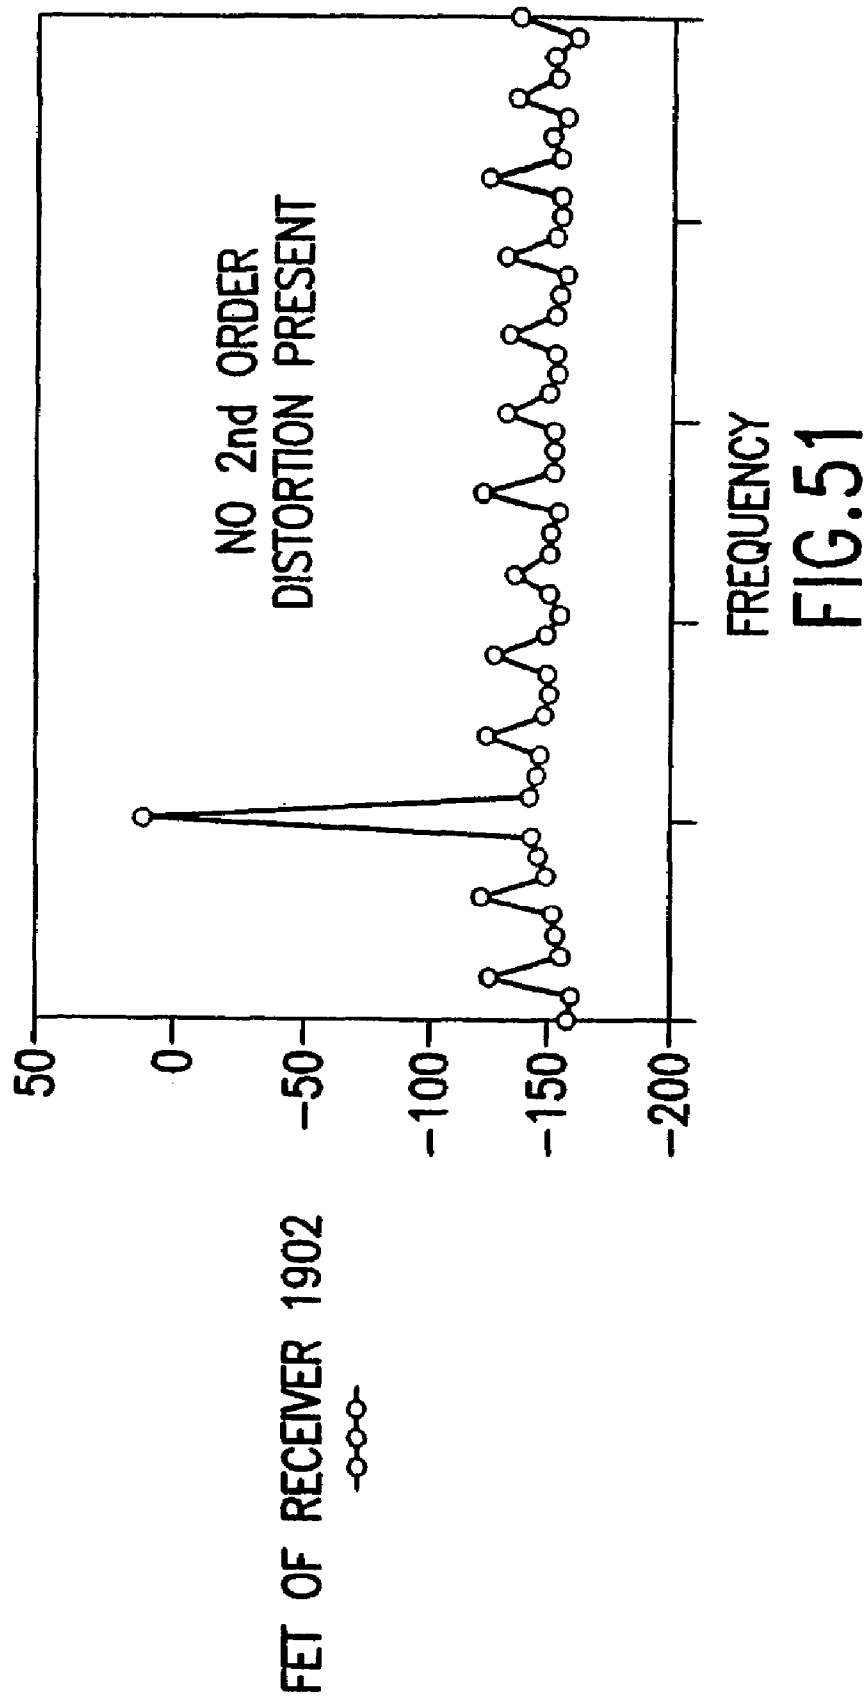

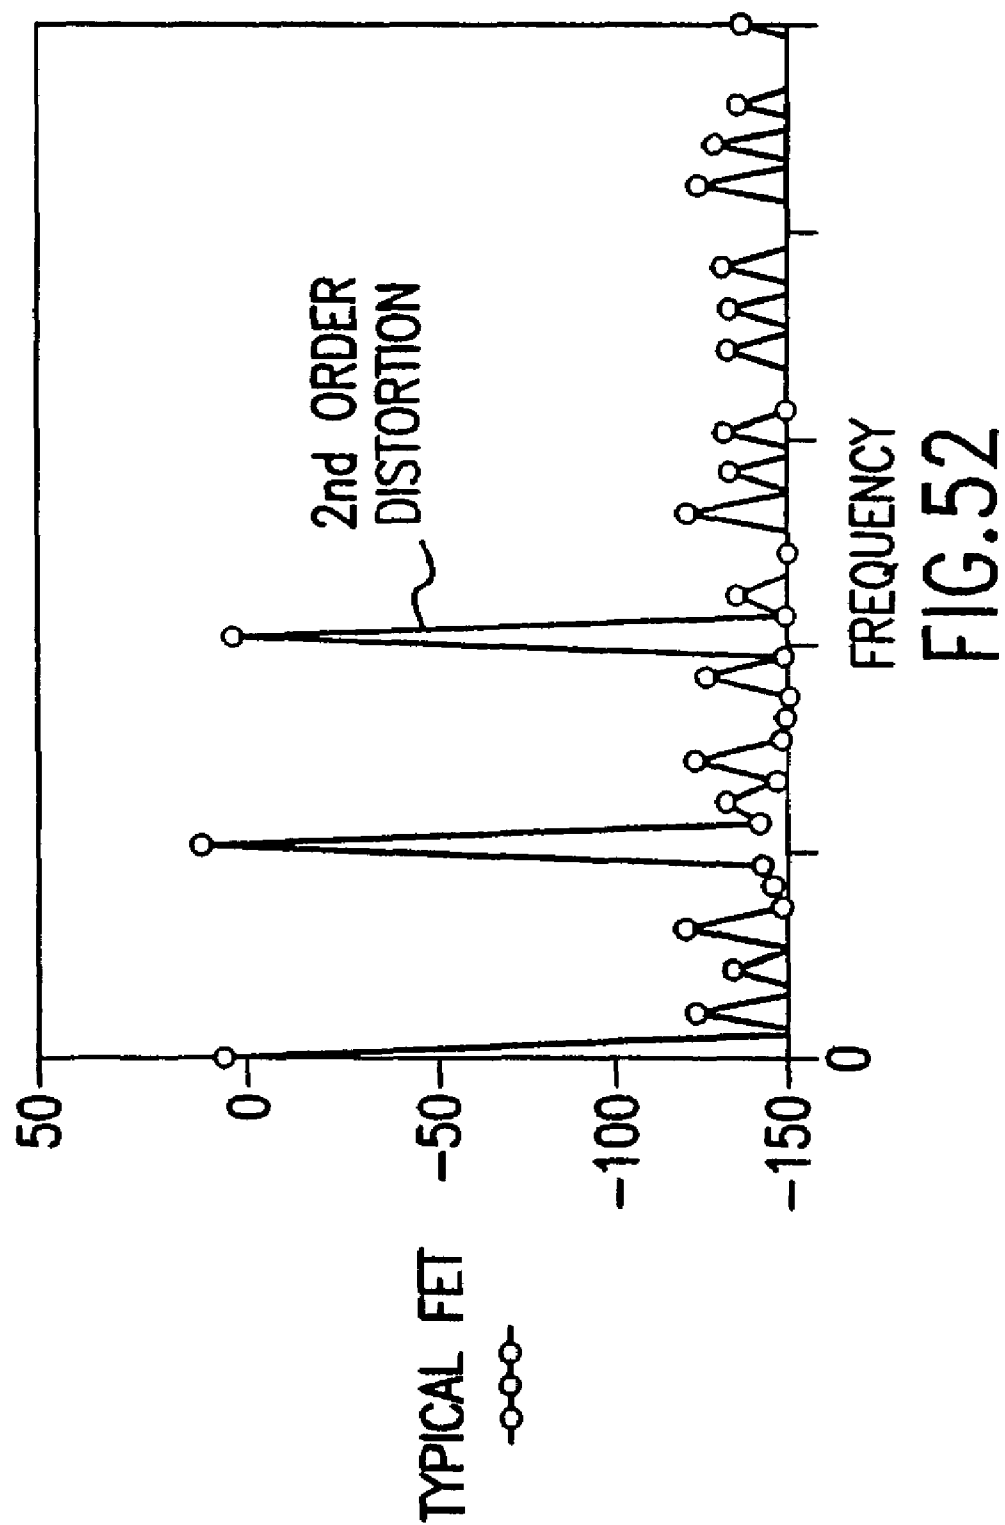

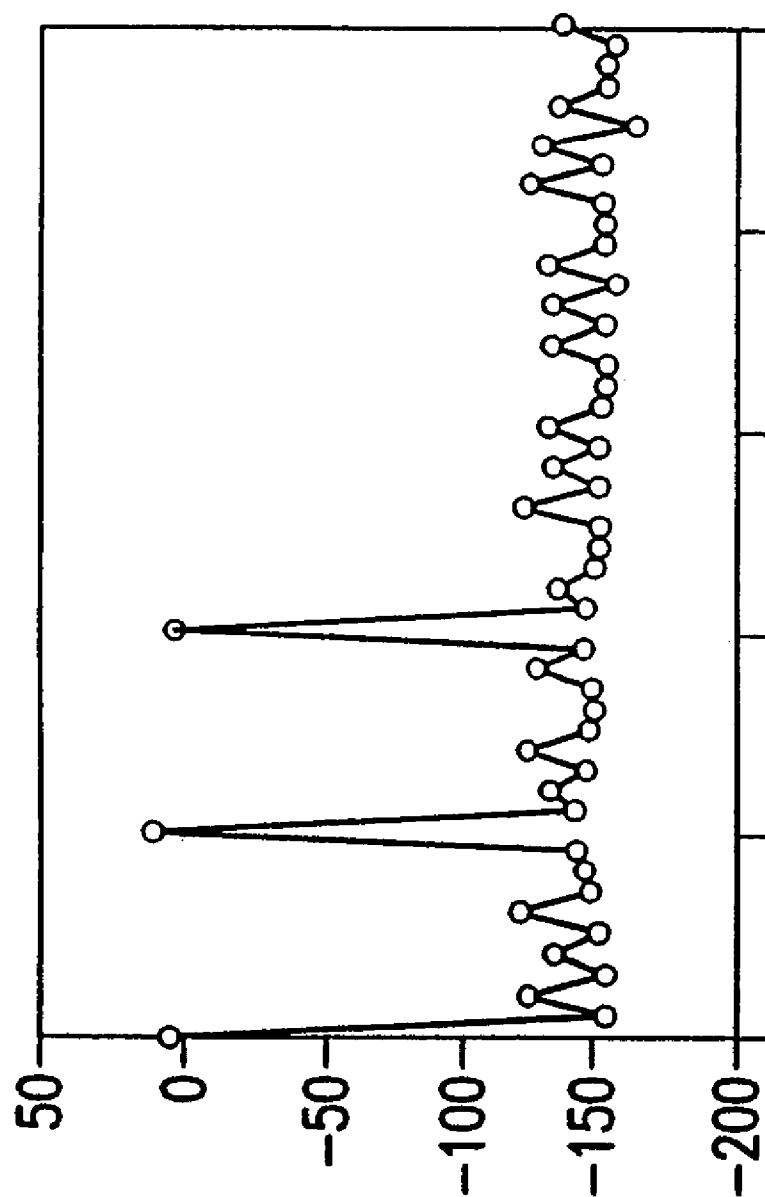

FREQUENCY
FIG. 53

FET OF RECEIVER
-o-o- 2002

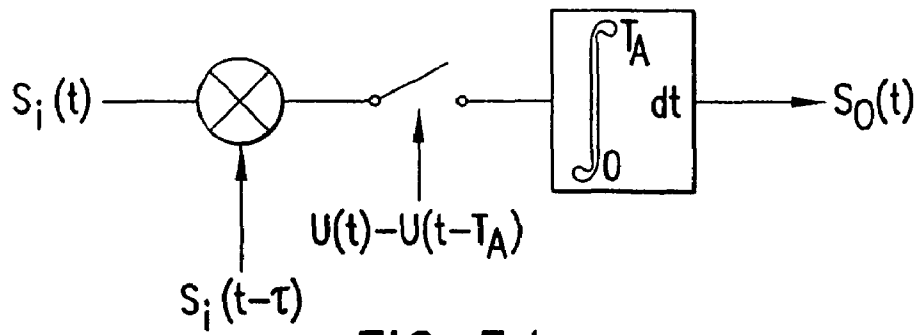


FIG. 54

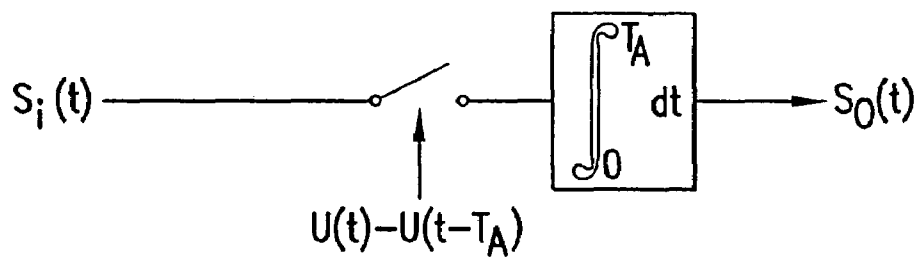


FIG. 55

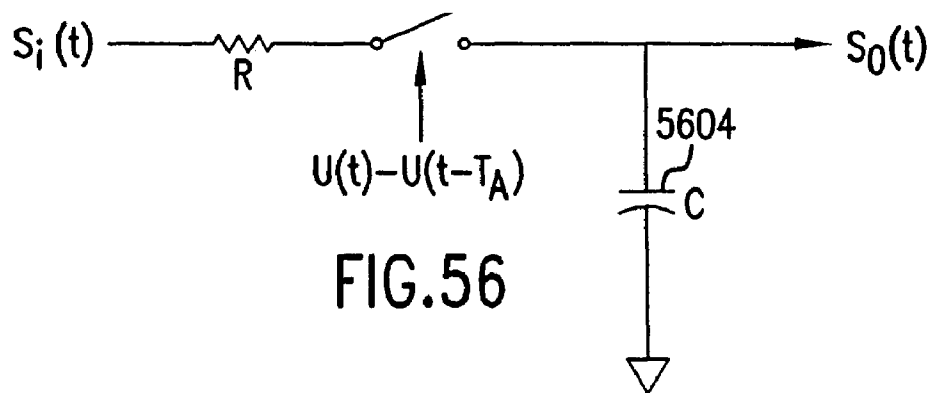
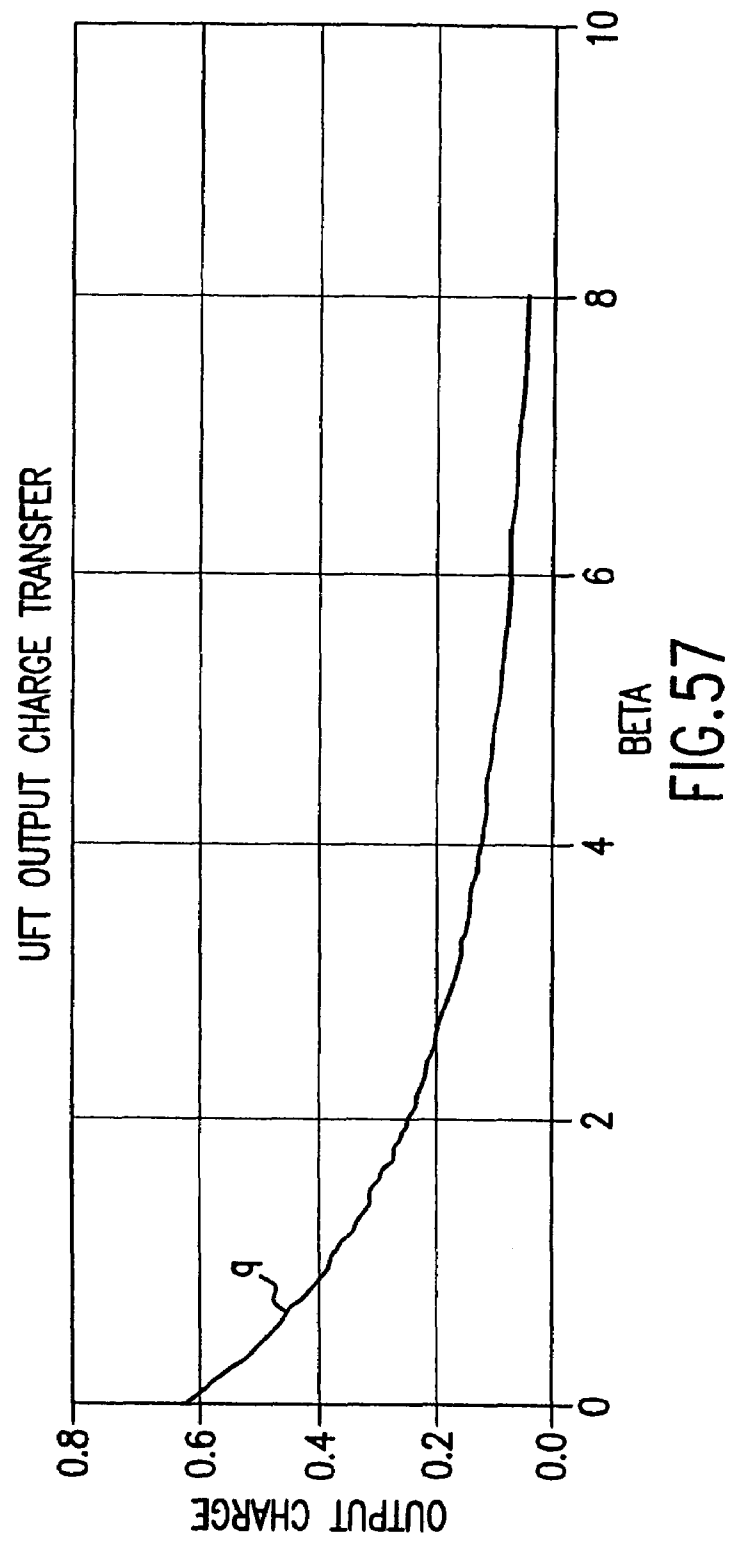


FIG. 56



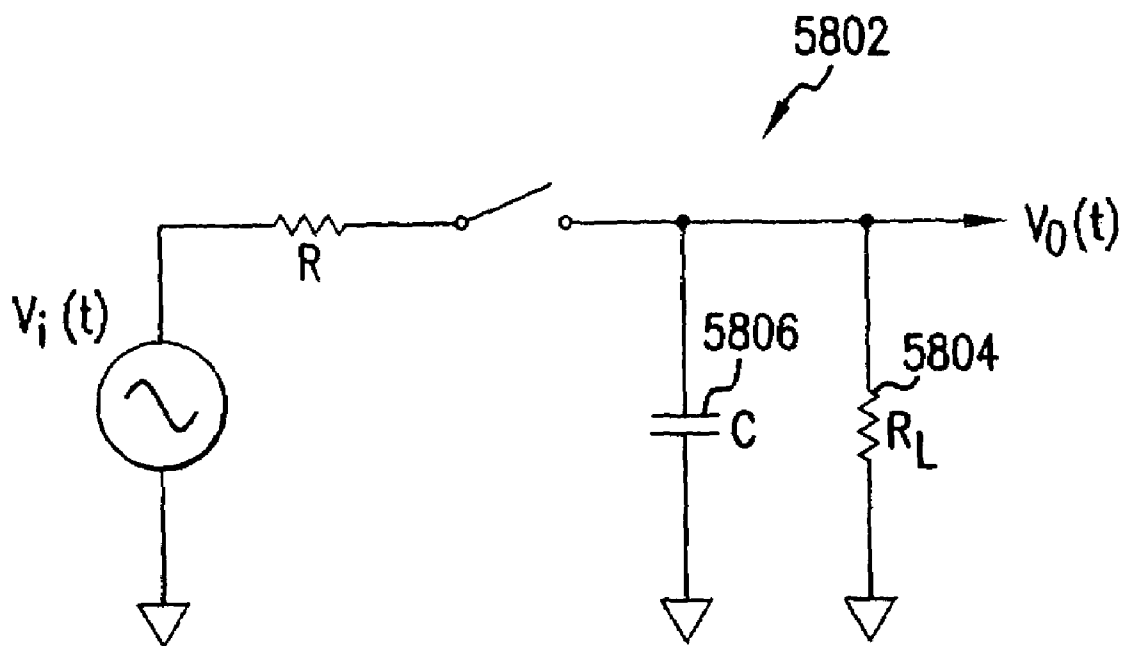


FIG.58

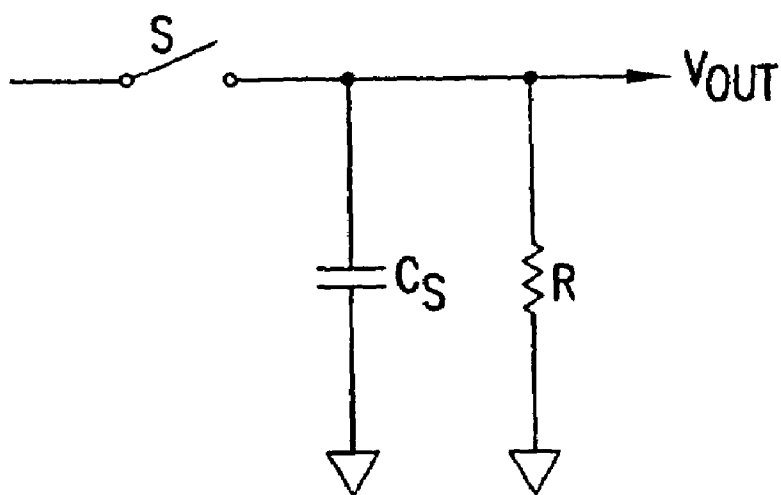


FIG.59

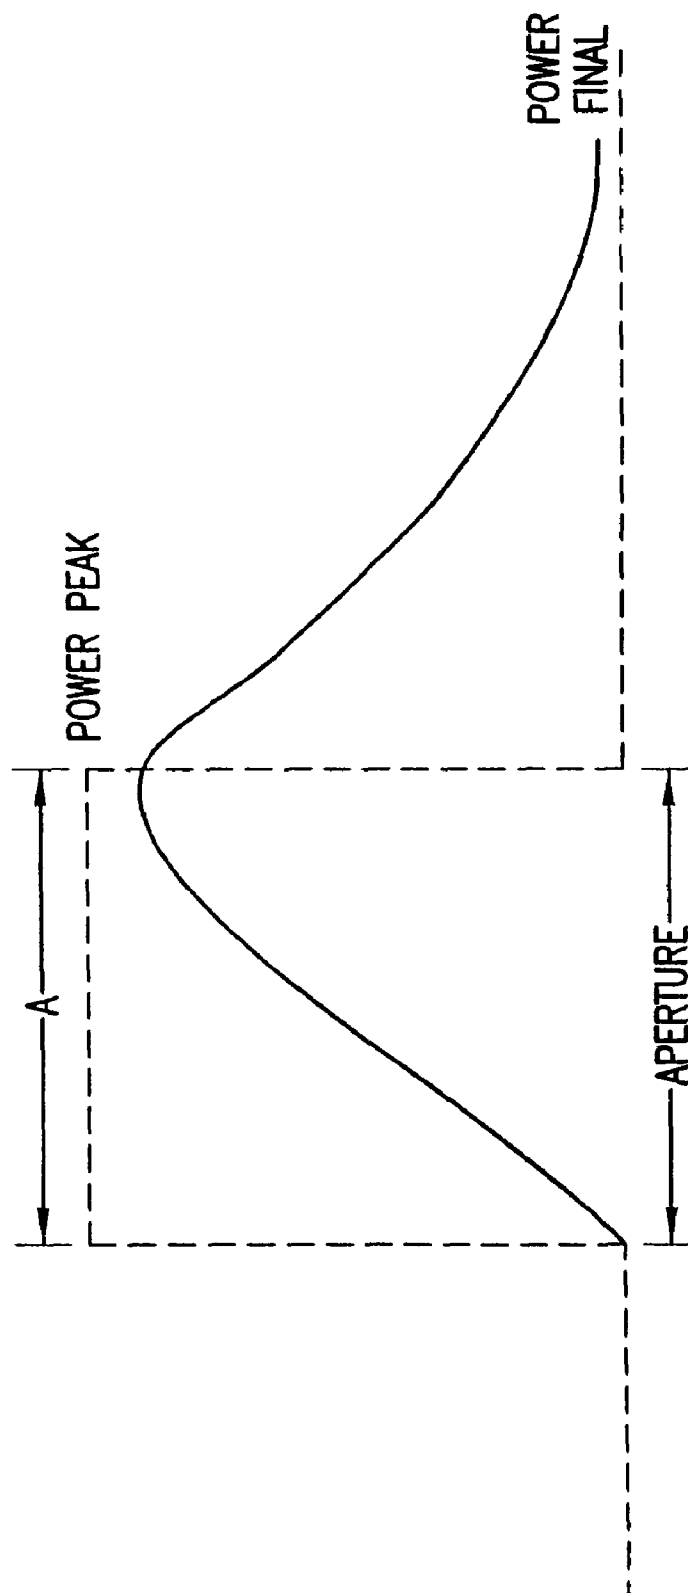
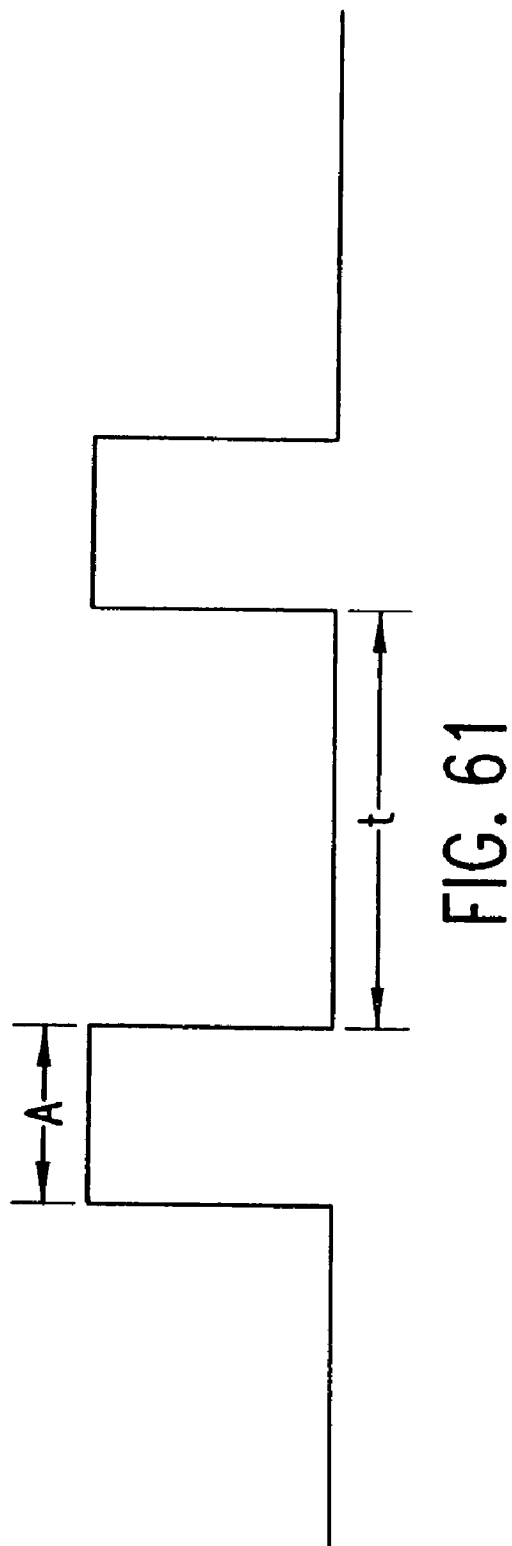


FIG. 60



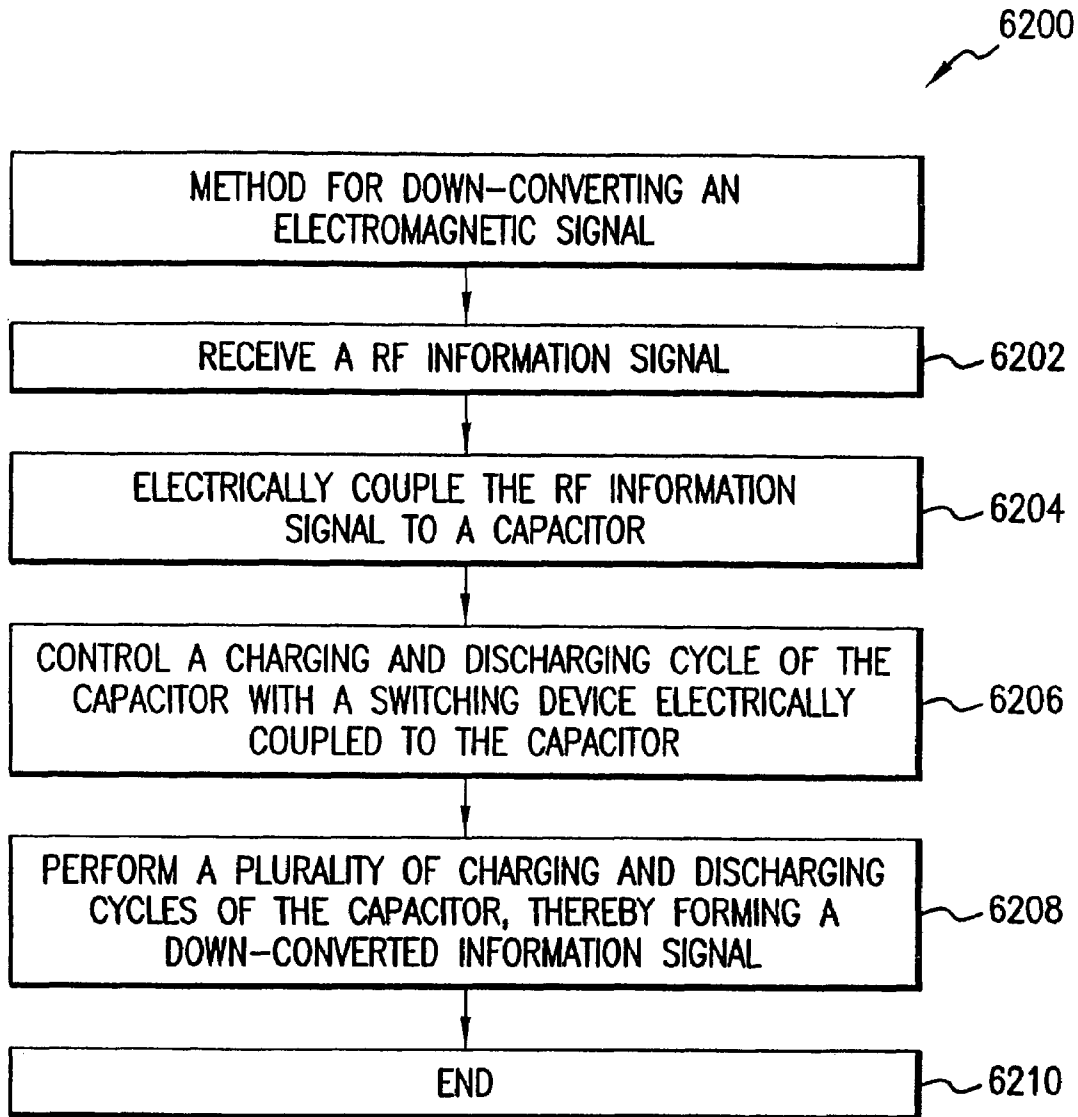


FIG.62

1

DOWN-CONVERTING ELECTROMAGNETIC SIGNALS, INCLUDING CONTROLLED DISCHARGE OF CAPACITORS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a divisional of pending application Ser. No. 09/855,851, filed on May 16, 2001, which is a continuation-in-part of pending U.S. patent application Ser. No. 09/550,644, filed Apr. 14, 2000, which are each herein incorporated by reference in their entireties, and U.S. patent application Ser. No. 09/855,851 claims the benefit of U.S. Provisional Application 60/204,796, filed May 16, 2000, U.S. Provisional Application 60/213,363, filed Jun. 21, 2000, and U.S. Provisional Application 60/272,043, filed Mar. 1, 2001, all of which are herein incorporated by reference in their entireties.

The following patents and patent applications of common assignee are related to the present application, and are herein incorporated by reference in their entireties:

U.S. Pat. No. 6,061,551, entitled "Method and System for Down-Converting Electromagnetic Signals," filed Oct. 21, 1998 and issued May 9, 2000.

U.S. Pat. No. 6,091,940, entitled "Method and System for Frequency Up-Conversion," filed Oct. 21, 1998 and issued Jul. 18, 2000.

U.S. Pat. No. 6,061,555, entitled "Method and System for Ensuring Reception of a Communications Signal," filed Oct. 21, 1998 and issued May 9, 2000.

U.S. Pat. No. 6,049,706, entitled "Integrated Frequency Translation And Selectivity," filed Oct. 21, 1998 and issued Apr. 11, 2000.

"Applications of Universal Frequency Translation," Ser. No. 09/261,129, filed Mar. 3, 1999.

"Method, System, and Apparatus for Balanced Frequency Up-Conversion of a Baseband Signal," Ser. No. 09/525,615, filed Mar. 14, 2000.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to the down-conversion and up-conversion of an electromagnetic signal using a universal frequency translation module.

2. Related Art

Various communication components exist for performing frequency down-conversion, frequency up-conversion, and filtering. Also, schemes exist for signal reception in the face of potential jamming signals.

SUMMARY OF THE INVENTION

Briefly stated, the present invention is directed to methods, systems, and apparatuses for down-converting and/or up-converting an electromagnetic signal, and applications thereof.

In an embodiment, the invention down-converts the electromagnetic signal to an intermediate frequency signal.

In another embodiment, the invention down-converts the electromagnetic signal to a demodulated baseband information signal.

In another embodiment, the electromagnetic signal is a frequency modulated (FM) signal, which is down-converted to a non-FM signal, such as a phase modulated (PM) signal or an amplitude modulated (AM) signal.

2

In one embodiment, the invention uses a stable, low frequency signal to generate a higher frequency signal with a frequency and phase that can be used as stable references.

In another embodiment, the present invention is used as a transmitter. In this embodiment, the invention accepts an information signal at a baseband frequency and transmits a modulated signal at a frequency higher than the baseband frequency.

In an embodiment, the invention operates by receiving an electromagnetic signal and recursively operating on approximate half cycles of a carrier signal. The recursive operations are typically performed at a sub-harmonic rate of the carrier signal. The invention accumulates the results of the recursive operations and uses the accumulated results to form a down-converted signal.

The methods and systems of transmitting vary slightly depending on the modulation scheme being used. For some embodiments using frequency modulation (FM) or phase modulation (PM), the information signal is used to modulate an oscillating signal to create a modulated intermediate signal. If needed, this modulated intermediate signal is "shaped" to provide a substantially optimum pulse-width-to-period ratio. This shaped signal is then used to control a switch that opens and closes as a function of the frequency and pulse width of the shaped signal. As a result of this opening and closing, a signal that is harmonically rich is produced with each harmonic of the harmonically rich signal being modulated substantially the same as the modulated intermediate signal. Through proper filtering, the desired harmonic (or harmonics) is selected and transmitted.

For some embodiments using amplitude modulation (AM), the switch is controlled by an unmodulated oscillating signal (which may, if needed, be shaped). As the switch opens and closes, it gates a reference signal, which is the information signal. In an alternate implementation, the information signal is combined with a bias signal to create the reference signal, which is then gated. The result of the gating is a harmonically rich signal having a fundamental frequency substantially proportional to the oscillating signal and an amplitude substantially proportional to the amplitude of the reference signal. Each of the harmonics of the harmonically rich signal also has amplitudes proportional to the reference signal, and is thus considered to be amplitude modulated. Just as with the FM/PM embodiments described above, through proper filtering, the desired harmonic (or harmonics) is selected and transmitted.

The invention is applicable to any type of electromagnetic signal, including but not limited to, modulated carrier signals (the invention is applicable to any modulation scheme or combination thereof) and unmodulated carrier signals.

Further features and advantages of the invention, as well as the structure and operation of various embodiments of the invention, are described in detail below with reference to the accompanying drawings. It is noted that the invention is not limited to the specific embodiments described herein. Such embodiments are presented herein for illustrative purposes only. Additional embodiments will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein.

BRIEF DESCRIPTION OF THE FIGURES

The invention shall be described with reference to the accompanying figures, wherein:

FIG. 1A is a block diagram of a universal frequency translation (UFT) module according to an embodiment of the invention.

3

FIG. 1B is a more detailed diagram of a universal frequency translation (UFT) module according to an embodiment of the invention.

FIG. 1C illustrates a UFT module used in a universal frequency down-conversion (UFD) module according to an embodiment of the invention.

FIG. 1D illustrates a UFT module used in a universal frequency up-conversion (UFU) module according to an embodiment of the invention.

FIG. 2 is a block diagram of a universal frequency translation (UFT) module according to an alternative embodiment of the invention.

FIGS. 3A and 3G are example aliasing modules according to embodiments of the invention.

FIGS. 3B-3F are example waveforms used to describe the operation of the aliasing modules of FIGS. 3A and 3G.

FIG. 4 illustrates an energy transfer system with an optional energy transfer signal module according to an embodiment of the invention.

FIG. 5 illustrates an example aperture generator.

FIG. 6A illustrates an example aperture generator.

FIG. 6B illustrates an oscillator according to an embodiment of the present invention.

FIGS. 7A-B illustrate example aperture generators.

FIG. 8 illustrates an aliasing module with input and output impedance match according to an embodiment of the invention.

FIG. 9 illustrates an example energy transfer module with a switch module and a reactive storage module according to an embodiment of the invention.

FIG. 10 is a block diagram of a universal frequency up-conversion (UFU) module according to an embodiment of the invention.

FIG. 11 is a more detailed diagram of a universal frequency up-conversion (UFU) module according to an embodiment of the invention.

FIG. 12 is a block diagram of a universal frequency up-conversion (UFU) module according to an alternative embodiment of the invention.

FIGS. 13A-13I illustrate example waveforms used to describe the operation of the UFU module.

FIG. 14 illustrates a unified down-converting and filtering (UDF) module according to an embodiment of the invention.

FIG. 15 illustrates an exemplary I/Q modulation embodiment of a receiver according to the invention.

FIG. 16A is an example two-switch receiver according to an embodiment of the invention.

FIGS. 16B-16G are example waveforms used to describe the operation of the example two-switch receiver of FIG. 16A.

FIG. 16H is an example two-switch receiver according to an embodiment of the invention.

FIGS. 16I-16N are example waveforms used to describe the operation of the example two-switch receiver of FIG. 16H.

FIG. 16O is a two-switch receiver and optional amplifier according to an embodiment of the invention.

FIG. 17 is an example two-switch receiver according to an embodiment of the invention.

FIG. 18A is an example one-switch receiver according to an embodiment of the invention.

FIGS. 18B-18E are example waveforms used to describe the operation of the example one-switch receiver of FIG. 18A.

FIG. 19 is an example one-switch receiver according to an embodiment of the invention.

4

FIG. 20A is an example one-switch receiver according to an embodiment of the invention.

FIGS. 20B-20D are example waveforms used to describe the operation of the example one-switch receiver of FIG. 20A.

FIG. 20E is an example one-switch receiver according to an embodiment of the invention.

FIG. 20F is an example one-switch receiver according to an embodiment of the invention.

FIG. 21 is an example one-switch receiver according to an embodiment of the invention.

FIGS. 22-23 illustrate exemplary block diagrams of a transmitter operating in an I/Q modulation mode, according to embodiments of the invention.

FIG. 24A is an example two-switch transmitter according to an embodiment of the invention.

FIGS. 24B-24K are example waveforms used to describe the operation of the example two-switch transmitter of FIG. 24A.

FIG. 25A is an example two-switch transmitter according to an embodiment of the invention.

FIGS. 25B-25F are example waveforms used to describe the operation of the example two-switch transmitter of FIG. 25A.

FIG. 26A is an example two-switch transmitter according to an embodiment of the invention.

FIGS. 26B-26F are example waveforms used to describe the operation of the example two-switch transmitter of FIG. 26A.

FIG. 27A is an example one-switch transmitter according to an embodiment of the invention.

FIGS. 27B-27E are example waveforms used to describe the operation of the example one-switch transmitter of FIG. 27A.

FIG. 28 illustrates a block diagram of a transceiver implementation according to an embodiment of the present invention.

FIG. 29 illustrates an exemplary receiver using UFD conversion techniques according to an embodiment of the present invention.

FIG. 30 illustrates an exemplary transmitter according to an embodiment of the present invention.

FIGS. 31A, 31B, and 31C illustrate an exemplary transmitter according to an embodiment of the present invention in a transceiver circuit with a universal frequency down conversion receiver operating in a half-duplex mode for an FM and PM modulation embodiment.

FIG. 32 illustrates an exemplary half-duplex mode transceiver implementation according to an embodiment of the present invention.

FIG. 33 illustrates an exemplary full-duplex mode transceiver implementation according to an embodiment of the present invention.

FIG. 34 is an example one-switch transceiver according to an embodiment of the invention.

FIG. 35 is an example digital aperture generator circuit according to an embodiment of the invention.

FIG. 36 is an example modulated carrier signal.

FIG. 37 is an example control signal for a conventional receiver.

FIG. 38 is an example control signal according to the invention.

FIG. 39 illustrates an aperture and a voltage signal for a conventional receiver.

FIG. 40 illustrates an aperture and a voltage signal according to an embodiment of the invention.

FIG. 41 illustrates voltage signals according to embodiments of the invention.

FIG. 42 is a plot of FET drain current as a function of drain-source voltage in embodiments of the invention.

FIG. 43 illustrates how FET linearity is enhanced by increasing drain-source voltage in embodiments of the invention.

FIG. 44 illustrates how FET linearity is enhanced when gate-source voltage is made proportional to drain-source voltage in embodiments of the invention.

FIGS. 45A-E illustrates how FET drain current distortion is reduced in embodiments of the invention.

FIGS. 46-53 further illustrate how FET linearity is enhanced in embodiments of the invention.

FIGS. 54-56 illustrate example processor embodiments according to the present invention.

FIG. 57 illustrates the relationship between beta and the output charge of a processor according to an embodiment of the present invention.

FIG. 58 illustrates an RC processor according to an embodiment of the present invention coupled to a load resistance.

FIG. 59 illustrates an example implementation of the present invention.

FIG. 60 illustrates an example charge/discharge timing diagram according to an embodiment of the present invention.

FIG. 61 illustrates example energy transfer pulses (control signal) according to an embodiment of the present invention.

FIG. 62 illustrates a flowchart of a method for down-converting an electromagnetic signal according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Table of Contents

1.	Introduction
2.	Universal Frequency Translation
2.1	Frequency Down-Conversion
2.2	Optional Energy Transfer Signal Module
2.3	Impedance Matching
2.4	Frequency Up-Conversion
2.5	Enhanced Signal Reception
2.6	Unified Down-Conversion and Filtering
3.	Example Embodiments of the Invention
3.1	Receiver Embodiments
3.1.1	In-Phase/Quadrature-Phase (I/Q) Modulation Mode Receiver Embodiments
3.1.2	Receiver Embodiments Having Two Aliasing Modules
3.1.3	Enhanced Single-Switch Receiver Embodiments
3.1.4	Other Receiver Embodiments
3.2	Transmitter Embodiments
3.2.1	In-Phase/Quadrature-Phase (I/Q) Modulation Mode Transmitter Embodiments
3.2.2	Enhanced Multi-Switch Transmitter Embodiments
3.2.3	Enhanced One-Switch Transmitter Embodiments
3.2.4	Other Transmitter Embodiments
3.3	Transceiver Embodiments
3.3.1	Example Half-Duplex Mode Transceiver
3.3.2	Example Full-Duplex Mode Transceiver
3.3.3	Enhanced Single Switch Transceiver Embodiment
3.3.4	Other Embodiments
4.	Enhanced Operating Features of the Invention
4.1	Enhanced Power and Information Extraction Features
4.2	Charge Transfer and Correlation
4.3	Load Resistor Consideration
4.4	Enhancing the Linear Operating Features of Embodiments of the Invention
5.	Example Method Embodiment of the Invention
6.	Conclusion

1. Introduction

The present invention is directed to the down-conversion and up-conversion of an electromagnetic signal using a universal frequency translation (UFT) module, transforms for same, and applications thereof. The systems described herein each may include one or more receivers, transmitters, and/or transceivers. According to embodiments of the invention, at least some of these receivers, transmitters, and/or transceivers are implemented using universal frequency translation (UFT) modules. The UFT modules perform frequency translation operations. Embodiments of the present invention are described below.

Systems that transmit and receive EM signals using UFT modules exhibit multiple advantages. These advantages include, but are not limited to, lower power consumption, longer power source life, fewer parts, lower cost, less tuning, and more effective signal transmission and reception. These systems can receive and transmit signals across a broad frequency range. The structure and operation of embodiments of the UFT module, and various applications of the same are described in detail in the following sections, and in the referenced documents.

2. Universal Frequency Translation

The present invention is related to frequency translation, and applications of same. Such applications include, but are not limited to, frequency down-conversion, frequency up-conversion, enhanced signal reception, unified down-conversion and filtering, and combinations and applications of same.

FIG. 1A illustrates a universal frequency translation (UFT) module 102 according to embodiments of the invention. (The UFT module is also sometimes called a universal frequency translator, or a universal translator.)

As indicated by the example of FIG. 1A, some embodiments of the UFT module 102 include three ports (nodes), designated in FIG. 1A as Port 1, Port 2, and Port 3. Other UFT embodiments include other than three ports.

Generally, the UFT module 102 (perhaps in combination with other components) operates to generate an output signal from an input signal, where the frequency of the output signal differs from the frequency of the input signal. In other words, the UFT module 102 (and perhaps other components) operates to generate the output signal from the input signal by translating the frequency (and perhaps other characteristics) of the input signal to the frequency (and perhaps other characteristics) of the output signal.

An example embodiment of the UFT module 103 is generally illustrated in FIG. 1B. Generally, the UFT module 103 includes a switch 106 controlled by a control signal 108. The switch 106 is said to be a controlled switch.

As noted above, some UFT embodiments include other than three ports. For example, and without limitation, FIG. 2 illustrates an example UFT module 202. The example UFT module 202 includes a diode 204 having two ports, designated as Port 1 and Port 2/3. This embodiment does not include a third port, as indicated by the dotted line around the "Port 3" label. Other embodiments, as described herein, have more than three ports.

The UFT module is a very powerful and flexible device. Its flexibility is illustrated, in part, by the wide range of applications in which it can be used. Its power is illustrated, in part, by the usefulness and performance of such applications.

For example, a UFT module 115 can be used in a universal frequency down-conversion (UFD) module 114, an example of which is shown in FIG. 1C. In this capacity, the UFT module 115 frequency down-converts an input signal to an output signal.

As another example, as shown in FIG. 1D, a UFT module 117 can be used in a universal frequency up-conversion (UFU) module 116. In this capacity, the UFT module 117 frequency up-converts an input signal to an output signal.

These and other applications of the UFT module are described below. Additional applications of the UFT module will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. In some applications, the UFT module is a required component. In other applications, the UFT module is an optional component.

2.1 Frequency Down-Conversion

The present invention is directed to systems and methods of universal frequency down-conversion, and applications of same.

In particular, the following discussion describes down-converting using a Universal Frequency Translation Module. The down-conversion of an EM signal by aliasing the EM signal at an aliasing rate is fully described in U.S. Pat. No. 6,061,551 entitled "Method and System for Down-Converting Electromagnetic Signals," the full disclosure of which is incorporated herein by reference. A relevant portion of the above-mentioned patent is summarized below to describe down-converting an input signal to produce a down-converted signal that exists at a lower frequency or a baseband signal. The frequency translation aspects of the invention are further described in other documents referenced above, such as application Ser. No. 09/550,644, entitled "Method and System for Down-converting an Electromagnetic Signal, and Transforms for Same, and Aperture Relationships."

FIG. 3A illustrates an aliasing module 300 for down-conversion using a universal frequency translation (UFT) module 302 which down-converts an EM input signal 304. In particular embodiments, aliasing module 300 includes a switch 308 and a capacitor 310 (or integrator). (In embodiments, the UFT module is considered to include the switch and integrator.) The electronic alignment of the circuit components is flexible. That is, in one implementation, the switch 308 is in series with input signal 304 and capacitor 310 is shunted to ground (although it may be other than ground in configurations such as differential mode). In a second implementation (see FIG. 3G), the capacitor 310 is in series with the input signal 304 and the switch 308 is shunted to ground (although it may be other than ground in configurations such as differential mode). Aliasing module 300 with UFT module 302 can be tailored to down-convert a wide variety of electromagnetic signals using aliasing frequencies that are well below the frequencies of the EM input signal 304.

In one implementation, aliasing module 300 down-converts the input signal 304 to an intermediate frequency (IF) signal. In another implementation, the aliasing module 300 down-converts the input signal 304 to a demodulated baseband signal. In yet another implementation, the input signal 304 is a frequency modulated (FM) signal, and the aliasing module 300 down-converts it to a non-FM signal, such as a phase modulated (PM) signal or an amplitude modulated (AM) signal. Each of the above implementations is described below.

In an embodiment, the control signal 306 includes a train of pulses that repeat at an aliasing rate that is equal to, or less than, twice the frequency of the input signal 304. In this embodiment, the control signal 306 is referred to herein as an aliasing signal because it is below the Nyquist rate for the frequency of the input signal 304. Preferably, the frequency of control signal 306 is much less than the input signal 304.

A train of pulses 318 as shown in FIG. 3D controls the switch 308 to alias the input signal 304 with the control signal

306 to generate a down-converted output signal 312. More specifically, in an embodiment, switch 308 closes on a first edge of each pulse 320 of FIG. 3D and opens on a second edge of each pulse. When the switch 308 is closed, the input signal 304 is coupled to the capacitor 310, and charge is transferred from the input signal to the capacitor 310. The charge stored during successive pulses forms down-converted output signal 312.

Exemplary waveforms are shown in FIGS. 3B-3F.

FIG. 3B illustrates an analog amplitude modulated (AM) carrier signal 314 that is an example of input signal 304. For illustrative purposes, in FIG. 3C, an analog AM carrier signal portion 316 illustrates a portion of the analog AM carrier signal 314 on an expanded time scale. The analog AM carrier signal portion 316 illustrates the analog AM carrier signal 314 from time t_0 to time t_1 .

FIG. 3D illustrates an exemplary aliasing signal 318 that is an example of control signal 306. Aliasing signal 318 is on approximately the same time scale as the analog AM carrier signal portion 316. In the example shown in FIG. 3D, the aliasing signal 318 includes a train of pulses 320 having negligible apertures that tend towards zero (the invention is not limited to this embodiment, as discussed below). The pulse aperture may also be referred to as the pulse width as will be understood by those skilled in the art(s). The pulses 320 repeat at an aliasing rate, or pulse repetition rate of aliasing signal 318. The aliasing rate is determined as described below.

As noted above, the train of pulses 320 (i.e., control signal 306) control the switch 308 to alias the analog AM carrier signal 316 (i.e., input signal 304) at the aliasing rate of the aliasing signal 318. Specifically, in this embodiment, the switch 308 closes on a first edge of each pulse and opens on a second edge of each pulse. When the switch 308 is closed, input signal 304 is coupled to the capacitor 310, and charge is transferred from the input signal 304 to the capacitor 310. The charge transferred during a pulse is referred to herein as an under-sample. Exemplary under-samples 322 form down-converted signal portion 324 (FIG. 3E) that corresponds to the analog AM carrier signal portion 316 (FIG. 3C) and the train of pulses 320 (FIG. 3D). The charge stored during successive under-samples of AM carrier signal 314 form the down-converted signal 324 (FIG. 3E) that is an example of down-converted output signal 312 (FIG. 3A). In FIG. 3F, a demodulated baseband signal 326 represents the demodulated baseband signal 324 after filtering on a compressed time scale. As illustrated, down-converted signal 326 has substantially the same "amplitude envelope" as AM carrier signal 314. Therefore, FIGS. 3B-3F illustrate down-conversion of AM carrier signal 314.

The waveforms shown in FIGS. 3B-3F are discussed herein for illustrative purposes only, and are not limiting.

The aliasing rate of control signal 306 determines whether the input signal 304 is down-converted to an IF signal, down-converted to a demodulated baseband signal, or down-converted from an FM signal to a PM or an AM signal. Generally, relationships between the input signal 304, the aliasing rate of the control signal 306, and the down-converted output signal 312 are illustrated below:

$$(\text{Freq. of input signal } 304) = n \cdot (\text{Freq. of control signal } 306) \pm (\text{Freq. of down-converted output signal } 312)$$

For the examples contained herein, only the "+" condition will be discussed. Example values of n include, but are not limited to, $n = \{0.5, 1, 2, 3, 4, \dots\}$.

9

When the aliasing rate of control signal **306** is off-set from the frequency of input signal **304**, or off-set from a harmonic or sub-harmonic thereof, input signal **304** is down-converted to an IF signal. This is because the under-sampling pulses occur at different phases of subsequent cycles of input signal **304**. As a result, the under-samples form a lower frequency oscillating pattern. If the input signal **304** includes lower frequency changes, such as amplitude, frequency, phase, etc., or any combination thereof, the charge stored during associated under-samples reflects the lower frequency changes, resulting in similar changes on the down-converted IF signal. For example, to down-convert a 901 MHz input signal to a 1 MHz IF signal, the frequency of the control signal **306** would be calculated as follows:

$$(\text{Freq}_{\text{input}} - \text{Freq}_{\text{IF}})/n = \text{Freq}_{\text{control}}$$

$$(901 \text{ MHz} - 1 \text{ MHz})/n = 900/n$$

For $n=\{0.5, 1, 2, 3, 4, \dots\}$, the frequency of the control signal **306** would be substantially equal to 1.8 GHz, 900 MHz, 450 MHz, 300 MHz, 225 MHz, etc.

Alternatively, when the aliasing rate of the control signal **306** is substantially equal to the frequency of the input signal **304**, or substantially equal to a harmonic or sub-harmonic thereof, input signal **304** is directly down-converted to a demodulated baseband signal. This is because, without modulation, the under-sampling pulses occur at the same point of subsequent cycles of the input signal **304**. As a result, the under-samples form a constant output baseband signal. If the input signal **304** includes lower frequency changes, such as amplitude, frequency, phase, etc., or any combination thereof, the charge stored during associated under-samples reflects the lower frequency changes, resulting in similar changes on the demodulated baseband signal. For example, to directly down-convert a 900 MHz input signal to a demodulated baseband signal (i.e., zero IF), the frequency of the control signal **306** would be calculated as follows:

$$(\text{Freq}_{\text{input}} - \text{Freq}_{\text{IF}})/n = \text{Freq}_{\text{control}}$$

$$(900 \text{ MHz} - 0 \text{ MHz})/n = 900 \text{ MHz}/n$$

For $n=\{0.5, 1, 2, 3, 4, \dots\}$, the frequency of the control signal **306** should be substantially equal to 1.8 GHz, 900 MHz, 450 MHz, 300 MHz, 225 MHz, etc.

Alternatively, to down-convert an input FM signal to a non-FM signal, a frequency within the FM bandwidth must be down-converted to baseband (i.e., zero IF). As an example, to down-convert a frequency shift keying (FSK) signal (a sub-set of FM) to a phase shift keying (PSK) signal (a subset of PM), the mid-point between a lower frequency F_1 and an upper frequency F_2 (that is, $[(F_1 + F_2)/2]$) of the FSK signal is down-converted to zero IF. For example, to down-convert an FSK signal having F_1 equal to 899 MHz and F_2 equal to 901 MHz, to a PSK signal, the aliasing rate of the control signal **306** would be calculated as follows:

$$\text{Frequency of the input} = (F_1 + F_2) \div 2$$

$$= (899 \text{ MHz} + 901 \text{ MHz}) \div 2$$

$$= 900 \text{ MHz}$$

Frequency of the down-converted signal = 0 (i.e., baseband)

$$(\text{Freq}_{\text{input}} - \text{Freq}_{\text{IF}})/n = \text{Freq}_{\text{control}}$$

$$(900 \text{ MHz} - 0 \text{ MHz})/n = 900 \text{ MHz}/n$$

10

For $n=\{0.5, 1, 2, 3, 4, \dots\}$, the frequency of the control signal **306** should be substantially equal to 1.8 GHz, 900 MHz, 450 MHz, 300 MHz, 225 MHz, etc. The frequency of the down-converted PSK signal is substantially equal to one half the difference between the lower frequency F_1 and the upper frequency F_2 .

As another example, to down-convert a FSK signal to an amplitude shift keying (ASK) signal (a subset of AM), either the lower frequency F_1 or the upper frequency F_2 of the FSK signal is down-converted to zero IF. For example, to down-convert an FSK signal having F_1 equal to 900 MHz and F_2 equal to 901 MHz, to an ASK signal, the aliasing rate of the control signal **306** should be substantially equal to:

$$(900 \text{ MHz} - 0 \text{ MHz})/n = 900 \text{ MHz}/n, \text{ or}$$

$$(901 \text{ MHz} - 0 \text{ MHz})/n = 901 \text{ MHz}/n.$$

For the former case of $900 \text{ MHz}/n$, and for $n=\{0.5, 1, 2, 3, 4, \dots\}$, the frequency of the control signal **306** should be substantially equal to 1.8 GHz, 900 MHz, 450 MHz, 300 MHz, 225 MHz, etc. For the latter case of $901 \text{ MHz}/n$, and for $n=\{0.5, 1, 2, 3, 4, \dots\}$, the frequency of the control signal **306** should be substantially equal to 1.802 GHz, 901 MHz, 450.5 MHz, 300.333 MHz, 225.25 MHz, etc. The frequency of the down-converted AM signal is substantially equal to the difference between the lower frequency F_1 and the upper frequency F_2 (i.e., 1 MHz).

In an embodiment, the pulses of the control signal **306** have negligible apertures that tend towards zero. This makes the UFT module **302** a high input impedance device. This configuration is useful for situations where minimal disturbance of the input signal may be desired.

In another embodiment, the pulses of the control signal **306** have non-negligible apertures that tend away from zero. This makes the UFT module **302** a lower input impedance device. This allows the lower input impedance of the UFT module **302** to be substantially matched with a source impedance of the input signal **304**. This also improves the energy transfer from the input signal **304** to the down-converted output signal **312**, and hence the efficiency and signal to noise (s/n) ratio of UFT module **302**.

Exemplary systems and methods for generating and optimizing the control signal **306**, and for otherwise improving energy transfer and s/n ratio, are disclosed in U.S. Pat. No. 6,061,551 entitled "Method and System for Down-Converting Electromagnetic Signals."

When the pulses of the control signal **306** have non-negligible apertures, the aliasing module **300** is referred to interchangeably herein as an energy transfer module or a gated transfer module, and the control signal **306** is referred to as an energy transfer signal. Exemplary systems and methods for generating and optimizing the control signal **306** and for otherwise improving energy transfer and/or signal to noise ratio in an energy transfer module are described below.

2.2 Optional Energy Transfer Signal Module

FIG. 4 illustrates an energy transfer system **401** that includes an optional energy transfer signal module **408**, which can perform any of a variety of functions or combinations of functions including, but not limited to, generating the energy transfer signal **406**.

In an embodiment, the optional energy transfer signal module **408** includes an aperture generator, an example of which is illustrated in FIG. 5 as an aperture generator **502**. The aperture generator **502** generates non-negligible aperture pulses **508** from an input signal **412**. The input signal **412** can be any type of periodic signal, including, but not limited to, a

11

sinusoid, a square wave, a saw-tooth wave, etc. Systems for generating the input signal **412** are described below.

The width or aperture of the pulses **508** is determined by delay through the branch **506** of the aperture generator **502**. Generally, as the desired pulse width increases, the difficulty in meeting the requirements of the aperture generator **502** decrease (i.e., the aperture generator is easier to implement). In other words, to generate non-negligible aperture pulses for a given EM input frequency, the components utilized in the example aperture generator **502** do not require reaction times as fast as those that are required in an under-sampling system operating with the same EM input frequency.

The example logic and implementation shown in the aperture generator **502** are provided for illustrative purposes only, and are not limiting. The actual logic employed can take many forms. The example aperture generator **502** includes an optional inverter **510**, which is shown for polarity consistency with other examples provided herein.

An example implementation of the aperture generator **502** is illustrated in FIG. 6A. Additional examples of aperture generation logic are provided in FIGS. 7A and 7B. FIG. 7A illustrates a rising edge pulse generator **702**, which generates pulses **508** on rising edges of the input signal **412**. FIG. 7B illustrates a falling edge pulse generator **704**, which generates pulses **508** on falling edges of the input signal **412**. These circuits are provided for example only, and do not limit the invention.

In an embodiment, the input signal **412** is generated externally of the energy transfer signal module **408**, as illustrated in FIG. 4. Alternatively, the input signal **412** is generated internally by the energy transfer signal module **408**. The input signal **412** can be generated by an oscillator, as illustrated in FIG. 6B by an oscillator **602**. The oscillator **602** can be internal to the energy transfer signal module **408** or external to the energy transfer signal module **408**. The oscillator **602** can be external to the energy transfer system **401**. The output of the oscillator **602** may be any periodic waveform.

The type of down-conversion performed by the energy transfer system **401** depends upon the aliasing rate of the energy transfer signal **406**, which is determined by the frequency of the pulses **508**. The frequency of the pulses **508** is determined by the frequency of the input signal **412**.

The optional energy transfer signal module **408** can be implemented in hardware, software, firmware, or any combination thereof.

2.3 Impedance Matching

The example energy transfer module **300** described in reference to FIG. 3A, above, has input and output impedances generally defined by (1) the duty cycle of the switch module (i.e., UFT **302**), and (2) the impedance of the storage module (e.g., capacitor **310**), at the frequencies of interest (e.g. at the EM input, and intermediate/baseband frequencies).

Starting with an aperture width of approximately $\frac{1}{2}$ the period of the EM signal being down-converted as an example embodiment, this aperture width (e.g. the "closed time") can be decreased (or increased). As the aperture width is decreased, the characteristic impedance at the input and the output of the energy transfer module increases. Alternatively, as the aperture width increases from $\frac{1}{2}$ the period of the EM signal being down-converted, the impedance of the energy transfer module decreases.

One of the steps in determining the characteristic input impedance of the energy transfer module could be to measure its value. In an embodiment, the energy transfer module's characteristic input impedance is 300 ohms. An impedance matching circuit can be utilized to efficiently couple an input EM signal that has a source impedance of, for example, 50

12

ohms, with the energy transfer module's impedance of, for example, 300 ohms. Matching these impedances can be accomplished in various manners, including providing the necessary impedance directly or the use of an impedance match circuit as described below.

Referring to FIG. 8, a specific example embodiment using an RF signal as an input, assuming that the impedance **812** is a relatively low impedance of approximately 50 Ohms, for example, and the input impedance **816** is approximately 300 Ohms, an initial configuration for the input impedance match module **806** can include an inductor **906** and a capacitor **908**, configured as shown in FIG. 9. The configuration of the inductor **906** and the capacitor **908** is a possible configuration when going from a low impedance to a high impedance. Inductor **906** and the capacitor **908** constitute an L match, the calculation of the values which is well known to those skilled in the relevant arts.

The output characteristic impedance can be impedance matched to take into consideration the desired output frequencies. One of the steps in determining the characteristic output impedance of the energy transfer module could be to measure its value. Balancing the very low impedance of the storage module at the input EM frequency, the storage module should have an impedance at the desired output frequencies that is preferably greater than or equal to the load that is intended to be driven (for example, in an embodiment, storage module impedance at a desired 1 MHz output frequency is 2K ohm and the desired load to be driven is 50 ohms). An additional benefit of impedance matching is that filtering of unwanted signals can also be accomplished with the same components.

In an embodiment, the energy transfer module's characteristic output impedance is 2K ohms. An impedance matching circuit can be utilized to efficiently couple the down-converted signal with an output impedance of, for example, 2K ohms, to a load of, for example, 50 ohms. Matching these impedances can be accomplished in various manners, including providing the necessary load impedance directly or the use of an impedance match circuit as described below.

When matching from a high impedance to a low impedance, a capacitor **914** and an inductor **916** can be configured as shown in FIG. 9. The capacitor **914** and the inductor **916** constitute an L match, the calculation of the component values being well known to those skilled in the relevant arts.

The configuration of the input impedance match module **806** and the output impedance match module **808** are considered in embodiments to be initial starting points for impedance matching, in accordance with embodiments of the present invention. In some situations, the initial designs may be suitable without further optimization. In other situations, the initial designs can be enhanced in accordance with other various design criteria and considerations.

As other optional optimizing structures and/or components are utilized, their affect on the characteristic impedance of the energy transfer module should be taken into account in the match along with their own original criteria.

2.4 Frequency Up-Conversion

The present invention is directed to systems and methods of frequency up-conversion, and applications of same.

An example frequency up-conversion system **1000** is illustrated in FIG. 10. The frequency up-conversion system **1000** is now described.

An input signal **1002** (designated as "Control Signal" in FIG. 10) is accepted by a switch module **1004**. For purposes of example only, assume that the input signal **1002** is a FM input signal **1306**, an example of which is shown in FIG. 13C. FM input signal **1306** may have been generated by modulat-

13

ing information signal **1302** onto oscillating signal **1304** (FIGS. **13A** and **13B**). It should be understood that the invention is not limited to this embodiment. The information signal **1302** can be analog, digital, or any combination thereof, and any modulation scheme can be used.

The output of switch module **1004** is a harmonically rich signal **1006**, shown for example in FIG. **13D** as a harmonically rich signal **1308**. The harmonically rich signal **1308** has a continuous and periodic waveform.

FIG. **13E** is an expanded view of two sections of harmonically rich signal **1308**, section **1310** and section **1312**. The harmonically rich signal **1308** may be a rectangular wave, such as a square wave or a pulse (although, the invention is not limited to this embodiment). For ease of discussion, the term “rectangular waveform” is used to refer to waveforms that are substantially rectangular. In a similar manner, the term “square wave” refers to those waveforms that are substantially square and it is not the intent of the present invention that a perfect square wave be generated or needed.

Harmonically rich signal **1308** is comprised of a plurality of sinusoidal waves whose frequencies are integer multiples of the fundamental frequency of the waveform of the harmonically rich signal **1308**. These sinusoidal waves are referred to as the harmonics of the underlying waveform, and the fundamental frequency is referred to as the first harmonic. FIG. **13F** and FIG. **13G** show separately the sinusoidal components making up the first, third, and fifth harmonics of section **1310** and section **1312**. (Note that in theory there may be an infinite number of harmonics; in this example, because harmonically rich signal **1308** is shown as a square wave, there are only odd harmonics). Three harmonics are shown simultaneously (but not summed) in FIG. **13H**.

The relative amplitudes of the harmonics are generally a function of the relative widths of the pulses of harmonically rich signal **1006** and the period of the fundamental frequency, and can be determined by doing a Fourier analysis of harmonically rich signal **1006**. According to an embodiment of the invention, the input signal **1306** may be shaped to ensure that the amplitude of the desired harmonic is sufficient for its intended use (e.g., transmission).

An optional filter **1008** filters out any undesired frequencies (harmonics), and outputs an electromagnetic (EM) signal at the desired harmonic frequency or frequencies as an output signal **1010**, shown for example as a filtered output signal **1314** in FIG. **13I**.

FIG. **11** illustrates an example universal frequency up-conversion (UFU) module **1101**. The UFU module **1101** includes an example switch module **1004**, which comprises a bias signal **1102**, a resistor or impedance **1104**, a universal frequency translator (UFT) **1150**, and a ground **1108**. The UFT **1150** includes a switch **1106**. The input signal **1002** (designated as “Control Signal” in FIG. **11**) controls the switch **1106** in the UFT **1150**, and causes it to close and open. Harmonically rich signal **1006** is generated at a node **1105** located between the resistor or impedance **1104** and the switch **1106**.

Also in FIG. **11**, it can be seen that an example optional filter **1008** is comprised of a capacitor **1110** and an inductor **1112** shunted to a ground **1114**. The filter is designed to filter out the undesired harmonics of harmonically rich signal **1006**.

The invention is not limited to the UFU embodiment shown in FIG. **11**.

For example, in an alternate embodiment shown in FIG. **12**, an unshaped input signal **1201** is routed to a pulse shaping module **1202**. The pulse shaping module **1202** modifies the unshaped input signal **1201** to generate a (modified) input

14

signal **1002** (designated as the “Control Signal” in FIG. **12**). The input signal **1002** is routed to the switch module **1004**, which operates in the manner described above. Also, the filter **1008** of FIG. **12** operates in the manner described above.

The purpose of the pulse shaping module **1202** is to define the pulse width of the input signal **1002**. Recall that the input signal **1002** controls the opening and closing of the switch **1106** in switch module **1004**. During such operation, the pulse width of the input signal **1002** establishes the pulse width of the harmonically rich signal **1006**. As stated above, the relative amplitudes of the harmonics of the harmonically rich signal **1006** are a function of at least the pulse width of the harmonically rich signal **1006**. As such, the pulse width of the input signal **1002** contributes to setting the relative amplitudes of the harmonics of harmonically rich signal **1006**.

Further details of up-conversion as described in this section are presented in U.S. Pat. No. 6,091,940, entitled “Method and System for Frequency Up-Conversion,” incorporated herein by reference in its entirety.

2.5 Enhanced Signal Reception

The present invention is directed to systems and methods of enhanced signal reception (ESR), and applications of same, which are described in the above-referenced U.S. Pat. No. 6,061,555, entitled “Method and System for Ensuring Reception of a Communications Signal,” incorporated herein by reference in its entirety.

2.6 Unified Down-Conversion and Filtering

The present invention is directed to systems and methods of unified down-conversion and filtering (UDF), and applications of same.

In particular, the present invention includes a unified down-converting and filtering (UDF) module that performs frequency selectivity and frequency translation in a unified (i.e., integrated) manner. By operating in this manner, the invention achieves high frequency selectivity prior to frequency translation (the invention is not limited to this embodiment). The invention achieves high frequency selectivity at substantially any frequency, including but not limited to RF (radio frequency) and greater frequencies. It should be understood that the invention is not limited to this example of RF and greater frequencies. The invention is intended, adapted, and capable of working with lower than radio frequencies.

FIG. **14** is a conceptual block diagram of a UDF module **1402** according to an embodiment of the present invention. The UDF module **1402** performs at least frequency translation and frequency selectivity.

The effect achieved by the UDF module **1402** is to perform the frequency selectivity operation prior to the performance of the frequency translation operation. Thus, the UDF module **1402** effectively performs input filtering.

According to embodiments of the present invention, such input filtering involves a relatively narrow bandwidth. For example, such input filtering may represent channel select filtering, where the filter bandwidth may be, for example, 50 KHz to 150 KHz. It should be understood, however, that the invention is not limited to these frequencies. The invention is intended, adapted, and capable of achieving filter bandwidths of less than and greater than these values.

In embodiments of the invention, input signals **1404** received by the UDF module **1402** are at radio frequencies. The UDF module **1402** effectively operates to input filter these RF input signals **1404**. Specifically, in these embodiments, the UDF module **1402** effectively performs input, channel select filtering of the RF input signal **1404**. Accordingly, the invention achieves high selectivity at high frequencies.

15

The UDF module **1402** effectively performs various types of filtering, including but not limited to bandpass filtering, low pass filtering, high pass filtering, notch filtering, all pass filtering, band stop filtering, etc., and combinations thereof.

Conceptually, the UDF module **1402** includes a frequency translator **1408**. The frequency translator **1408** conceptually represents that portion of the UDF module **1402** that performs frequency translation (down conversion).

The UDF module **1402** also conceptually includes an apparent input filter **1406** (also sometimes called an input filtering emulator). Conceptually, the apparent input filter **1406** represents that portion of the UDF module **1402** that performs input filtering.

In practice, the input filtering operation performed by the UDF module **1402** is integrated with the frequency translation operation. The input filtering operation can be viewed as being performed concurrently with the frequency translation operation. This is a reason why the input filter **1406** is herein referred to as an "apparent" input filter **1406**.

The UDF module **1402** of the present invention includes a number of advantages. For example, high selectivity at high frequencies is realizable using the UDF module **1402**. This feature of the invention is evident by the high Q factors that are attainable. For example, and without limitation, the UDF module **1402** can be designed with a filter center frequency f_c on the order of 900 MHz, and a filter bandwidth on the order of 50 KHz. This represents a Q of 18,000 (Q is equal to the center frequency divided by the bandwidth).

It should be understood that the invention is not limited to filters with high Q factors. The filters contemplated by the present invention may have lesser or greater Qs, depending on the application, design, and/or implementation. Also, the scope of the invention includes filters where Q factor as discussed herein is not applicable.

The invention exhibits additional advantages. For example, the filtering center frequency f_c of the UDF module **1402** can be electrically adjusted, either statically or dynamically.

Also, the UDF module **1402** can be designed to amplify input signals.

Further, the UDF module **1402** can be implemented without large resistors, capacitors, or inductors. Also, the UDF module **1402** does not require that tight tolerances be maintained on the values of its individual components, i.e., its resistors, capacitors, inductors, etc. As a result, the architecture of the UDF module **1402** is friendly to integrated circuit design techniques and processes.

The features and advantages exhibited by the UDF module **1402** are achieved at least in part by adopting a new technological paradigm with respect to frequency selectivity and translation. Specifically, according to the present invention, the UDF module **1402** performs the frequency selectivity operation and the frequency translation operation as a single, unified (integrated) operation. According to the invention, operations relating to frequency translation also contribute to the performance of frequency selectivity, and vice versa.

According to embodiments of the present invention, the UDF module generates an output signal from an input signal using samples/instances of the input signal and/or samples/instances of the output signal.

More particularly, first, the input signal is under-sampled. This input sample includes information (such as amplitude, phase, etc.) representative of the input signal existing at the time the sample was taken.

As described further below, the effect of repetitively performing this step is to translate the frequency (that is, down-convert) of the input signal to a desired lower frequency, such as an intermediate frequency (IF) or baseband.

16

Next, the input sample is held (that is, delayed).

Then, one or more delayed input samples (some of which may have been scaled) are combined with one or more delayed instances of the output signal (some of which may have been scaled) to generate a current instance of the output signal.

Thus, according to a preferred embodiment of the invention, the output signal is generated from prior samples/instances of the input signal and/or the output signal. (It is noted that, in some embodiments of the invention, current samples/instances of the input signal and/or the output signal may be used to generate current instances of the output signal.) By operating in this manner, the UDF module **1402** preferably performs input filtering and frequency down-conversion in a unified manner.

Further details of unified down-conversion and filtering as described in this section are presented in U.S. Pat. No. 6,049,706, entitled "Integrated Frequency Translation And Selectivity," filed Oct. 21, 1998, and incorporated herein by reference in its entirety.

3. Example Embodiments of the Invention

As noted above, the UFT module of the present invention is a very powerful and flexible device. Its flexibility is illustrated, in part, by the wide range of applications and combinations in which it can be used. Its power is illustrated, in part, by the usefulness and performance of such applications and combinations.

Such applications and combinations include, for example and without limitation, applications/combinations comprising and/or involving one or more of: (1) frequency translation; (2) frequency down-conversion; (3) frequency up-conversion; (4) receiving; (5) transmitting; (6) filtering; and/or (7) signal transmission and reception in environments containing potentially jamming signals. Example receiver, transmitter, and transceiver embodiments implemented using the UFT module of the present invention are set forth below.

3.1 Receiver Embodiments

In embodiments, a receiver according to the invention includes an aliasing module for down-conversion that uses a universal frequency translation (UFT) module to down-convert an EM input signal. For example, in embodiments, the receiver includes the aliasing module **300** described above, in reference to FIG. 3A or FIG. 3G. As described in more detail above, the aliasing module **300** may be used to down-convert an EM input signal to an intermediate frequency (IF) signal or a demodulated baseband signal.

In alternate embodiments, the receiver may include the energy transfer system **401**, including energy transfer module **404**, described above, in reference to FIG. 4. As described in more detail above, the energy transfer system **401** may be used to down-convert an EM signal to an intermediate frequency (IF) signal or a demodulated baseband signal. As also described above, the aliasing module **300** or the energy transfer system **401** may include an optional energy transfer signal module **408**, which can perform any of a variety of functions or combinations of functions including, but not limited to, generating the energy transfer signal **406** of various aperture widths.

In further embodiments of the present invention, the receiver may include the impedance matching circuits and/or techniques described herein for enhancing the energy transfer system of the receiver.

3.1.1 In-Phase/Quadrature-Phase (I/Q) Modulation Mode Receiver Embodiments

FIG. 15 illustrates an exemplary I/Q modulation mode embodiment of a receiver **1502**, according to an embodiment

17

of the present invention. This I/Q modulation mode embodiment is described herein for purposes of illustration, and not limitation. Alternate I/Q modulation mode embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), as well as embodiments of other modulation modes, will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

Receiver 1502 comprises an I/Q modulation mode receiver 1538, a first optional amplifier 1516, a first optional filter 1518, a second optional amplifier 1520, and a second optional filter 1522.

I/Q modulation mode receiver 1538 comprises an oscillator 1506, a first UFD module 1508, a second UFD module 1510, a first UFT module 1512, a second UFT module 1514, and a phase shifter 1524.

Oscillator 1506 provides an oscillating signal used by both first UFD module 1508 and second UFD module 1510 via the phase shifter 1524. Oscillator 1506 generates an "I" oscillating signal 1526.

"I" oscillating signal 1526 is input to first UFD module 1508. First UFD module 1508 comprises at least one UFT module 1512. First UFD module 1508 frequency down-converts and demodulates received signal 1504 to down-converted "I" signal 1530 according to "I" oscillating signal 1526.

Phase shifter 1524 receives "I" oscillating signal 1526, and outputs "Q" oscillating signal 1528, which is a replica of "I" oscillating signal 1526 shifted preferably by 90 degrees.

Second UFD module 1510 inputs "Q" oscillating signal 1528. Second UFD module 1510 comprises at least one UFT module 1514. Second UFD module 1510 frequency down-converts and demodulates received signal 1504 to down-converted "Q" signal 1532 according to "Q" oscillating signal 1528.

Down-converted "I" signal 1530 is optionally amplified by first optional amplifier 1516 and optionally filtered by first optional filter 1518, and a first information output signal 1534 is output.

Down-converted "Q" signal 1532 is optionally amplified by second optional amplifier 1520 and optionally filtered by second optional filter 1522, and a second information output signal 1536 is output.

In the embodiment depicted in FIG. 15, first information output signal 1534 and second information output signal 1536 comprise a down-converted baseband signal. In embodiments, first information output signal 1534 and second information output signal 1536 are individually received and processed by related system components. Alternatively, first information output signal 1534 and second information output signal 1536 are recombined into a single signal before being received and processed by related system components.

Alternate configurations for I/Q modulation mode receiver 1538 will be apparent to persons skilled in the relevant art(s) from the teachings herein. For instance, an alternate embodiment exists wherein phase shifter 1524 is coupled between received signal 1504 and UFD module 1510, instead of the configuration described above. This and other such I/Q modulation mode receiver embodiments will be apparent to persons skilled in the relevant art(s) based upon the teachings herein, and are within the scope of the present invention.

3.1.2 Receiver Embodiments having two Aliasing Modules

As described herein, certain receiver embodiments of the present invention are implemented using two or more aliasing modules 300. These embodiments are described herein for purposes of illustration, and not limitation. Alternate embodi-

18

ments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

FIG. 16A illustrates an exemplary receiver 1602 having two aliasing modules 300 (or, as generally the case herein, having energy transfer modules 404) according to an embodiment of the present invention. Receiver 1602 comprises an UFD module 1638, a first optional amplifier 1620, a first low-pass filter 1622, a second optional amplifier 1624, and a second low-pass filter 1626.

As illustrated in FIG. 16A, UFD module 1638 comprises two aliasing modules 1632 and 1634 and two impedances 1616 and 1618. Aliasing modules 1632 and 1634 are similar to the aliasing module shown in FIG. 3G, whose operation is described herein. The output of aliasing module 1632 is coupled to impedance 1616 at a node 1605. The output of aliasing module 1634 is coupled to impedance 1618 at a node 1607. In an embodiment, impedances 1616 and 1618 are resistors. Impedances 1616 and 1618 are coupled together at a node 1609. A bias voltage is applied to node 1609.

Impedances 1616 and 1618 are illustrative, and not intended to limit the invention. In some embodiments, impedances 1616 and 1618 are a part of optional amplifiers 1620 and 1624, and thus there are no separate impedance devices 1616 and 1618 (see FIG. 16O). Similarly, in some embodiments, optional amplifiers 1620 and 1624 act as filters to the carrier signal riding on top of the down-converted signals 1650 and 1652, and thus there is no need to include filters 1622 and 1626 (see FIG. 16O), as would be understood by a person skilled in the relevant arts given the description of the invention herein.

Aliasing module 1632 comprises a capacitor 1604 and a switching device 1608 controlled by an aperture generator 1612. One end of switching device 1608 is connected to node 1609, as shown in FIG. 16A.

FIG. 35 illustrates one embodiment for aperture generator 1612. In an embodiment, an input signal 1642 is provided to the input of aliasing module 1632. Input signal 1642 and an example control signal 1646 are illustrated in FIG. 16B.

An output signal 1650 of aliasing module 1632, for input signal 1642, is illustrated in FIG. 16C. In FIG. 16C, slope 1651 represents a down-converted signal. Slope 1654 represents the rate of discharge of capacitor 1604 between apertures. In some embodiments of the invention, low-pass filter 1622 is used to remove the carrier signal from the down-converted signal. Similarly, in some embodiments optional amplifier 1620 removes the carrier signal from the down-converted signal.

Aliasing module 1634 comprises a capacitor 1606 and a switching device 1610 controlled by an aperture generator 1614. One end of switching device 1610 is connected to node 1609, as shown in FIG. 16A. FIG. 35 illustrates one embodiment for aperture generator 1612. An input signal 1644 is provided to the input of aliasing module 1634. Input signal 1644 is generated in some embodiments of the invention by inverting signal 1642. Input signal 1644 and an example control signal 1648 are illustrated in FIG. 16B. As shown in FIG. 16B, the apertures of signal 1648 do not overlap the apertures of signal 1646. Note that the apertures of signals 1646 and 1648 are illustrative. Other portions of input signals 1642 and 1644 could be sampled in accordance with the invention to form a down-converted signal, which would involve using apertures other than the apertures shown in FIG. 16B, as will be understood by a person skilled in the relevant arts given the description of the invention herein.

19

An output signal **1652** of aliasing module **1634**, for input signal **1644**, is illustrated in FIG. **16D**. In FIG. **16D**, slope **1653** represents the down-converted signal. Slope **1655** represents the rate of discharge of capacitor **1606** between apertures. As described above, in some embodiments, low-pass filter **1626** is used to remove the carrier signal from the down-converted signal. In some embodiments, optional amplifier **1642** removes the carrier signal.

The output signal for UFD module **1638** (receiver **1602**) is a differential output signal. FIGS. **16E** and **16F** illustrate an example differential output signal of UFD module **1638** (i.e., the sum of signals **1650** and **1652**). An illustrative differential output signal for receiver **1602** is shown in FIG. **16G** (i.e., the sum of signals **1670** and **1672**). As illustrated by signals **1670** and **1672**, embodiments of receiver **1602** can be used to receive and down-convert any communications signal. Carrier amplitude and phase changes relative to the sample aperture(s) are reflected in the output signals **1670** and **1672** as illustrated in FIG. **16G**. FIG. **16G** demonstrates the differential output when the input signal and aperture generator(s) are not related by an exact frequency multiple. As will be understood by a person skilled in the relevant arts, the sample aperture(s) roll over the input signal and capture different portions of the input signal. By illustrating that the aperture(s) can capture any amplitude and/or phase of an input signal, it is demonstrated that embodiments of receiver **1602** can be used to receive and down-convert any communications signal.

In an embodiment, the capacitors **1604** and **1606** are selected in accordance with the criteria described in section **4** below. In an embodiment, capacitors **1604** and **1606** are selected so that they discharge at a rate of between six percent to fifty percent between apertures of the control signals. However, different ranges apply to other embodiments, depending on the particular application, requirements, implementation, purpose, etc. The impedances **1616** and **1618** typically have similar values (e.g., impedances **1616** and **1618** may be resistors having the same nominal values but different actual values).

In an embodiment, the period of control signals **1646** and **1648** operate at a third or a fifth harmonic of the input carrier signal (i.e., input signals **1642** and **1644**). In an embodiment, switching device **1608** is closed for approximately one-half cycle of the input signal **1642** each period of control signal **1646**. Similarly, switching device **1610** is closed for approximately one-half cycle of the input signal **1644** each period of control signal **1648**.

In an embodiment, aperture generator **1614** is coupled to a clock signal that is 180 degrees out of phase with respect to the clock signal coupled to aperture generator **1612**. In an embodiment, the clock signal coupled to aperture generator **1614** has the same period as the clock signal coupled to aperture generator **1612**.

The operation of receiver **1602** will now be described.

A modulated carrier signal **1642** is input to the carrier(+) port of receiver **1602**. The modulated carrier signal causes a charge to be stored on capacitor **1604** when switching device **1608** is closed. Switching device **1608** is opened and closed by control signal **1646**. Aperture generator **1612** generates control signal **1646**.

The modulated carrier signal **1642** is inverted to generate a signal **1644**. Signal **1644** is input to the carrier(-) port of receiver **1602**. Signal **1644** causes a charge to be stored on capacitor **1606** when switching device **1610** is closed. Switching device **1610** is opened and closed by control signal **1648**. Aperture generator **1614** generates control signal **1648**.

20

When switching device **1608** is open, capacitor **1604** discharges. This causes a voltage signal to be generated across impedance **1616**. Similarly, when switching device **1610** is open, capacitor **1606** discharges. This causes a voltage signal to be generated across impedance **1618**. The opening and closing of switching devices **1608** and **1610** in accordance with the invention causes a down-converted signal **1650** (one-half of the output of receiver **1602**) to be formed across impedance **1616** and a down-converted signal **1652** (one-half of the output of receiver **1602**) to be formed across impedance **1618**. Signals **1650** and **1652** are 180 degrees out of phase. The total output of receiver **1602** is the differential output, or the sum of signals **1650** and **1652**. Filters **1622** and **1626** are used to remove the carrier from the down-converted signal. As described herein, in embodiments, optional amplifiers **1620** and **1624** are band limited, and thus act as filters and remove the carrier.

As will be understood by a person skilled in the relevant arts, given the description of the invention herein, UFD module **1638** has several features that make it particularly well adapted for certain applications. It is a feature of UFD module **1638** that it has an impedance in a range of about 50-75 ohms for certain control signals. UFD module **1638** can thus be coupled to other circuit devices that comprise receiver **1602** without using an impedance matching circuit as described herein (although one could optionally be used). This feature of UFD module **1638** allows for a high power or energy transfer, and it minimizes or eliminates interfacing requirements. Another feature of UFD module **1638** is that it may be implemented on a single chip using CMOS technology. This feature of UFD module **1638** is a feature applicable to apparatus embodiments of the invention in general.

FIG. **16H** illustrates another embodiment of a UFD module **1688** according to the invention. In the embodiment of FIG. **16H**, aliasing modules of the type shown in FIG. **3A** are used. This embodiment of the invention operates similarly to UFD module **1638**, except that the carrier signal is removed from the down converted signal by capacitors **1604** and **1606** during down-conversion.

FIG. **16I** illustrates one possible relationship between example input signals **1643** and **1645** and example control signals **1647** and **1649**. As described above, the apertures of signals **1647** and **1649** are illustrative. Other portions of input signals **1643** and **1644** could be sampled in accordance with the invention to form a down-converted signal, which would involve using apertures other than the apertures shown in FIG. **16I**, as will be understood by a person skilled in the relevant arts given the description of the invention herein.

FIGS. **16J-16L** illustrate down-converted signals for the receiver of FIG. **16H**. FIG. **16J** illustrates a down-converted signal **1651**, for input signal **1643**. As can be seen in FIG. **16J**, down-converted signal **1651** is similar to down-converted signal **1652** (note that the carrier has not been removed from signal **1652** and is riding on top of the down-converted signal). Similarly, FIG. **16K** illustrates a down-converted signal **1653**, for input signal **1645**. As can be seen in FIG. **16K**, down-converted signal **1653** is similar to down-converted signal **1651** (note that the carrier has not been removed from signal **1651** and is riding on top of the down-converted signal). Signals **1651** and **1653** are plotted together with control signals **1647** and **1649** in FIG. **16L**.

FIG. **16M** illustrates the outputs of the UFD module **1688** in FIG. **16H**. FIG. **16M** is similar to FIG. **16F**. One significant difference, however, as can be seen between FIGS. **16M** and **16F**, however, is that signals **1651** and **1653** do not go to zero during each period of the control signals **1647** and **1649**. This is not the case for the UFD module **1638** in FIG. **16A**, as can

21

be seen by looking at signals **1650** and **1652**. When the switching devices **1608** and **1610**, as configured in FIG. **16H**, are closed, the output of UFD module **1688** is not connected to a bias point (AC ground).

FIG. **16N** illustrates the filtered output of the receiver of FIG. **16H**. As can be seen by comparing FIGS. **16G** and **16N**, the filtered outputs of the receiver embodiments shown in FIGS. **16A** and **16H** are the same, thereby demonstrating the interchangeability of embodiments of aliasing modules and/or energy transfer modules according to the invention in embodiments of the invention.

As illustrated by signals **1671** and **1673**, in FIG. **16N**, embodiments of the receiver of FIG. **16H** can be used to receive and down-convert any communications signal. Carrier amplitude and phase changes relative to the sample aperture(s) are reflected in the output signals **1671** and **1673** as illustrated in FIG. **16N**. FIG. **16N** demonstrates the differential output when the input signal and aperture generator(s) are not related by an exact frequency multiple. As will be understood by a person skilled in the relevant arts, the sample aperture(s) roll over the input signal and capture different portions of the input signal. By illustrating that the aperture(s) can capture any amplitude and/or phase of an input signal, it is demonstrated that embodiments of the receiver of FIG. **16H** can be used to receive and down-convert any communications signal.

The operation of the receiver of FIG. **16H** is similar to that of receiver **1602**, and thus is not repeated here. A person skilled in the relevant art will understand how the receiver of FIG. **16H** operates given the description of the invention herein.

FIG. **17** illustrates a receiver **1702** according to an embodiment of the invention having two aliasing modules. Receiver **1702** is similar to receiver **1602**. Like receiver **1602**, example receiver **1702** is implemented using aliasing modules similar to the embodiment shown in FIG. **3G**.

Receiver **1702** comprises a UFD **1738**, an inverter **1703**, two optional amplifiers **1720** and **1724**, and two low-pass filters **1722** and **1726**. The aliasing modules of UFD **1738** are implemented using switches **1708** and **1710**. In the embodiment of FIG. **17**, switches **1708** and **1710** are formed using complementary enhancement type MOSFETs. A bias voltage **1711** is coupled to a node **1709** of UFD **1738**.

A modulated carrier signal is supplied to one of the input ports of UFD module **1738**. An inverter **1703** is used to invert the modulated carrier signal and thereby produce a carrier(−) signal. An uninverted modulated carrier signal is referred to herein as a carrier(+) signal. The output of inverter **1703** is supplied to a second input port of UFD module **1738**, as shown in FIG. **17**.

As will be understood by a person skilled in the relevant arts, UFD module **1738** operates in a manner similar to that described herein, for example, for UFD module **1638**. The various signals of receiver **1702** are similar to the signals illustrated in FIGS. **16B-G**.

The operation of receiver **1702** is also similar to that of receiver **1602**, and thus is not repeated here. A person skilled in the relevant art will understand how receiver **1702** operates given the description of the invention herein.

3.1.3 Enhanced Single-Switch Receiver Embodiments

As described herein, single-switch receiver embodiments of the present invention are enhanced to maximize both power transfer and information extraction. These embodiments are described herein for purposes of illustration, and not limitation. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), will be apparent to persons skilled in the

22

relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

FIG. **18A** illustrates an exemplary one-switch receiver **1802** according to an embodiment of the invention. Receiver **1802** comprises a UFD module **1832**, a first optional amplifier **1820**, a first low-pass filter **1822**, a second optional amplifier **1824**, and a second low-pass filter **1826**.

As illustrated in FIG. **18A**, UFD module **1832** comprises two capacitors **1804** and **1806**, a switching device **1808**, a switching signal generator **1812**, and two impedance devices **1816** and **1818**. In an embodiment, impedance devices **1816** and **1818** are resistors. Impedance devices **1816** and **1818** are coupled together at a node **1809**. A bias voltage is applied to node **1809**.

Impedances **1816** and **1818** are illustrative, and not intended to limit the invention. In some embodiment, impedances **1816** and **1818** are a part of optional amplifiers **1820** and **1824**, and thus there are no separate impedance devices **1816** and **1818**. Similarly, in some embodiments, optional amplifiers **1820** and **1824** act as filters to the carrier signal riding on top of the down-converted signals **1850** and **1852**, and thus there is no need to include filters **1822** and **1826**, as would be understood by a person skilled in the relevant arts given the description of the invention herein.

FIG. **35** illustrates one embodiment for switching device (aperture generator) **1812**. An example control signal **1846** is illustrated in FIG. **18B**.

FIGS. **18B-18E** illustrate example waveforms for receiver **1802**. The waveforms are for an embodiment of the invention wherein capacitors **1804** and **1806** have a nominal value of 11 pF and impedance devices **1816** and **1818** are resistors having a nominal value of 547 ohms. The waveforms illustrated are for a 1 GHz input carrier signal.

In an embodiment, the capacitors **1804** and **1806** are selected in accordance with the criteria described in section **4** below. Capacitors **1804** and **1806** are selected so that they discharge at a rate of between six percent to fifty percent between apertures of the switching (control) signal.

In an embodiment, the period of control signal **1846** operates at a third or a fifth harmonic of the input carrier signal (i.e., input signals **1842** and **1844**). As described herein, the received carrier signal is referred to as a carrier(+) signal, and an inverted version of the received signal is referred to as a carrier(−) signal. Switching device **1808** is closed for approximately one-half cycle of the input signal **1842** each period of control signal **1846**.

FIG. **18B** illustrates a switching signal (aperture generator signal) **1846**. Also shown in FIG. **18B** is a voltage signal **1860** across capacitor **1804**, and a voltage signal **1862** across capacitor **1806**. The voltage across capacitors **1804** and **1806** increases when switch **1808** is closed. The voltage across capacitors **1804** and **1806** decreases when switch **1808** is open. Slope **1861** in FIG. **18B** illustrates the discharge of capacitor **1806** between the apertures of switching (control) signal **1846**. A similar discharge occurs for capacitor **1804**, as can be seen from signal **1860**.

FIG. **18C** illustrates the output(+) signal **1850** of UFD module **1832** and the output(−) signal **1852** of UFD module **1832**. These signals contain both a down-converted (information) signal and the carrier signal. Switching signal **1842** is also shown as a point of reference. Slope **1851** in FIG. **18C** is due to the discharge of capacitor **1804**, and illustrates that energy is being transferred in accordance with the invention.

FIG. **18D** illustrates the output signal of UFD module **1832** after the carrier signal has been removed using low-pass filters **1822** and **1826**. Signal **1870** shows the output of filter

23

1822. Signal **1872** shows the output of filter **1826**. Switching signal **1846** is shown in FIG. **18D** for reference.

FIG. **18E** shows the output of receiver **1802** for an extended period of time, as illustrated by switching signal **1846**. In FIG. **18E**, the input carrier signal has a frequency of 1 GHz, but the period of switching signal **1846** has been extended from 3.000 ns (as is the case for the waveforms of FIGS. **18B-D**) to 3.003 ns. Thus, the phase of the input carrier signal is slowly varying relative to switching signal **1846**. Signal **1870** in FIG. **18E** is the output of filter **1822**. Signal **1872** is the output of filter **1826**.

As illustrated by signals **1870** and **1872**, embodiments of receiver **1802** can be used to receive and down-convert any communications signal. Carrier amplitude and phase changes relative to the sample aperture(s) are reflected in the output signals **1870** and **1872** as illustrated in FIG. **18E**. FIG. **18E** demonstrates the differential output when the input signal and aperture generator are not related by an exact frequency multiple. As will be understood by a person skilled in the relevant arts, the sample aperture(s) roll over the input signal and capture different portions of the input signal. By illustrating that the aperture(s) can capture any amplitude and/or phase of an input signal, it is demonstrated that embodiments of receiver **1802** can be used to receive and down-convert any communications signal.

The operation of receiver **1802** will now be described.

A modulated carrier signal **1642** is input to the carrier(+) port of receiver **1802**. The modulated carrier signal causes a charge to be stored on capacitor **1804** when switching device **1808** is closed, thereby generating a voltage signal **1860** across capacitor **1804**. Switching device **1808** is opened and closed by control signal **1846**. Aperture generator **1812** generates control signal **1846**.

The modulated carrier signal **1642** is inverted to generate a signal **1644**. Signal **1644** is input to the carrier(-) port of receiver **1802**. Signal **1644** causes a charge to be stored on capacitor **1806** when switching device **1808** is closed, thereby generating a voltage signal **1862** across capacitor **1806**.

When switching device **1808** is opened, both capacitor **1804** and capacitor **1806** begin to discharge. This causes a voltage signal **1850** to be generated across impedance **1816**, and a voltage signal **1852** to be generated across impedance **1818**.

The opening and closing of switching device **1808** in accordance with the invention causes a down-converted signal **1850** (one-half of the output of receiver **1802**) to be formed across impedance **1816** and a down-converted signal **1852** (one-half of the output of receiver **1802**) to be formed across impedance **1818**. Signals **1850** and **1852** are 180 degrees out of phase. The total output of receiver **1802** is the differential output, or the sum of signals **1850** and **1852**. Filters **1822** and **1826** are used to remove the carrier from the down-converted signal. In embodiments, optional amplifiers **1820** and **1824** are band limited, and thus act as filters and remove the carrier.

As will be understood by a person skilled in the relevant arts, given the description of the invention herein, UFD module **1832** has several features that make it particularly well adapted for certain applications. It is a feature of UFD module **1832** that it provides exceptional linearity per milliwatt. For example, rail to rail dynamic range is possible with minimal increase in power. In an example integrated circuit embodiment, UFD module **1832** provides +55 dmb IP2, +15 dbm IP3, at 3.3V, 4.4 ma, -15 dmb LO. GSM system requirements are +22 dbm IP2, -10.5 dmb IP3. CDMA system requirements are +50 dmb IP2, +10 dbm IP3. Accordingly, the invention satisfies these standards. Another feature of UFD module

24

1832 is that it only requires one switching device **1808** and one aperture generator **1812**. A further feature of UFD module **1832** is that it may be implemented on a single chip using CMOS technology. As described herein, this feature of UFD module **1832** is a feature applicable to apparatus embodiments of the invention in general. Additional features of UFD module **1832** are described elsewhere herein.

FIG. **19** is another example of a one-switch receiver **1902** having a UFD module **1938** according to an embodiment of the invention. As illustrated in FIG. **19**, UFD module **1938** comprises two capacitors **1904** and **1906**, a CMOS switching device **1908**, two switching signal generators **1912A** and **1912B**, and two impedance devices **1916** and **1918**. In an embodiment, impedance devices **1916** and **1918** are resistors. Impedance devices **1916** and **1918** are coupled together at a node **1909**. A bias voltage **1911** (AC Ground) having a nominal value of one-half Vdd is applied to node **1909**. As illustrated in FIG. **19**, in an embodiment, a transformer **1960** is used to couple an input signal to UFD module **1938**.

As already described herein, impedances **1916** and **1918** are illustrative, and not intended to limit the invention. In some embodiment, impedances **1916** and **1918** are a part of optional amplifiers (not shown), and thus there are no separate impedance devices **1916** and **1918**. Similarly, in some embodiments, optional amplifiers (not shown) act as filters to the carrier signal riding on top of the down-converted signals, and thus there is no need to include filters with receiver **1902**.

As will be understood by a person skilled in the relevant arts, UFD module **1938** operates in a manner similar to that described herein, for example, for UFD module **1832**. Features of UFD module **1938** are also described below in section **4**. In particular, the enhanced linear features of UFD module **1938** are described in detail below.

The operation of receiver **1902** is similar to that of receiver **1802**, and thus is not repeated here. A person skilled in the relevant art will understand how receiver **1902** operates given the description of the invention herein.

FIG. **20A** is an example one-switch receiver **2001** having an aliasing module **2032** according to an embodiment of the invention and an impedance device **2016**. Aliasing module **2032** is of the type illustrated in FIG. **3G**. Impedance **2016** is illustrative, and not intended to limit the invention. In some embodiment, impedance **2016** is a part of an optional amplifier (not shown), and thus there is no separate impedance device **2016**.

As illustrated in FIG. **20A**, UFD module **2032** comprises a capacitor **2004**, a switching device **2008** and an aperture generator **2012**. Impedance device **2016** is coupled to switching device **2008**, as shown in FIG. **20A**. A bias voltage (AC ground) is applied to a node **2009**. As will be apparent to a person skilled in the relevant arts, generally speaking, receiver **2001** comprises one-half of receiver **1602**.

In an embodiment, capacitor **2004** is selected in accordance with the criteria described in section **4** below. Capacitor **2004** is selected so that it discharges at a rate of between six percent to fifty percent between apertures of switching (control) signal **2046**. The period of control signal **2046** operates at a third or a fifth harmonic of the input carrier signal. Switching device **2008** is closed for approximately one-half cycle of the input signal during each period of control signal **2046**.

FIGS. **20B-20D** illustrate example waveforms for receiver **2001**. The waveforms are for an embodiment of the invention, wherein capacitor **2004** has a nominal value of 11 pf and impedance device **2016** is resistor having a nominal value of 547 ohms. The waveforms illustrated are for a 1 GHz input carrier signal.

25

FIG. 20B illustrates a switching signal (aperture generator signal) **2046**. Also shown in FIG. 20B is a voltage signal **2060** across capacitor **2004**. The voltage across capacitor **2004** increases when switch **2008** is closed. The voltage across capacitor **2004** decreases when switch **2008** is open. A periodic slope in signal **2060** illustrates the discharge of capacitor **2004** between the apertures of switching (control) signal **2046**. Signal **2050** illustrates the output of receiver **2001**. As can be seen, the output comprises both a down-converter signal and the carrier. The carrier can be removed using a filter (not shown).

FIG. 20C illustrates the output signal **2070** of UFD module **2032** after the carrier signal has been removed. Switching signal **2046** is shown in FIG. 20C for reference.

FIG. 20D shows the output of receiver **2001** for an extended period of time, as illustrated by switching signal **2046**. In FIG. 20D, the input carrier signal has a frequency of 1 GHz, but the period of switching signal **2046** has been extended from 3.000 ns (as is the case for the waveforms of FIGS. 20B-20C) to 3.003 ns. Thus, the phase of the input carrier signal is slowly varying relative to switching signal **2046**. Signal **2070** in FIG. 20D is the output of UFD module **2032** after the carrier has been removed by low-pass filtering.

As illustrated by signal **1870**, in FIG. 29D, embodiments of receiver **2001** can be used to receive and down-convert any communications signal. Carrier amplitude and phase changes relative to the sample aperture(s) are reflected in the output signal **2070** as illustrated in FIG. 20D. FIG. 20D demonstrates the output when the input signal and aperture generator are not related by an exact frequency multiple. As will be understood by a person skilled in the relevant arts, the sample aperture(s) roll over the input signal and capture different portions of the input signal. By illustrating that the aperture(s) can capture any amplitude and/or phase of an input signal, it is demonstrated that embodiments of receiver **2001** can be used to receive and down-convert any communications signal.

The operation of receiver **2001** is similar to that of other receiver embodiments already described herein. A modulated carrier signal is input to the carrier port of receiver **2101**. The modulated carrier signal causes a charge to be stored on capacitor **2104** and capacitor **2106** when switching device **2108** is closed, thereby generating a voltage signal across capacitors **2104** and **2106**. Switching device **2108** is opened and closed by control signal having apertures similar to other control signals illustrated herein. Aperture generator **2112** generates the control signal.

A difference between receiver **2101** and receiver **1802**, for example, is that the modulated carrier signal is not inverted to input to a carrier(-) port. As can be seen in FIG. 21, the second input port of receiver **2101** is coupled to a ground.

When switching device **2108** is opened, both capacitor **2104** and capacitor **2106** begin to discharge. This causes a voltage to be generated across impedance **2116**, and a voltage to be generated across impedance **2118**.

The opening and closing of switching device **2108** in accordance with the invention causes a down-converted signal (one-half of the output of receiver **2101**) to be formed across impedance **2116** and a down-converted signal (one-half of the output of receiver **2101**) to be formed across impedance **2118**. The total output of receiver **2101** is the differential output, or the sum of signals. Filters (not shown) are used to remove the carrier from the down-converted signal. In embodiments, optional amplifiers (not shown) are band limited, and thus act as filters and remove the carrier.

As will be understood by a person skilled in the relevant arts, given the description of the invention herein, receiver

26

2001 has several features that make it particularly well adapted for certain applications. For example, it is a feature of receiver **2001** that it may be implemented using fewer devices than other embodiments and that it may be implemented on a single chip using CMOS technology.

FIG. 20E illustrates a signal switch receiver **2002** having an aliasing module **2032** according to an embodiment of the invention and an impedance device **2016**. Aliasing module **2032** is of the type illustrated in FIG. 3G.

As illustrated in FIG. 20E, UFD module **2032** comprises a capacitor **2004**, a switching device **2008** and two aperture generators **2012A** and **2012B**. Impedance device **2016** is coupled to switching device **2008**, as shown in FIG. 20A. A bias voltage (AC ground) is applied to a node **2009**. Receiver **2002** is similar to receiver **2001**.

The operation of receiver **2002** is similar to that of other receiver embodiments already described herein, and thus is not repeated here. A person skilled in the relevant art will understand how receiver **2001** operates given the description of the invention herein.

FIG. 20F illustrates another embodiment of a single switch receiver **2003** having an aliasing module **2032** according to the invention. In the embodiment of FIG. 20F, an aliasing module of the type shown in FIG. 3A is used. This embodiment of the invention operates similarly to receiver **2001**, except that the carrier signal is removed from the down converted signal by capacitor **2004** during down-conversion.

Since the operation of receiver **2003** is similar to that of other receiver embodiments already described herein, it is not repeated here. A person skilled in the relevant art will understand how receiver **2003** operates given the description of the invention herein.

FIG. 21 is another example one-switch receiver **2101** according to an embodiment of the invention. Receiver **2101** comprises a UFD module **2138**, similar to UFD module **1832**, described above. As seen in FIG. 21, one of the input ports of UFD module **2138** is coupled to ground. It is a feature of receiver **2101** that no carrier(-) input signal is required. The operation of receiver **2101** is similar to that of other receiver embodiments already described herein, and thus is not repeated here. A person skilled in the relevant art will understand how receiver **2101** operates given the description of the invention herein.

3.1.4 Other Receiver Embodiments

The receiver embodiments described above are provided for purposes of illustration. These embodiments are not intended to limit the invention. Alternate embodiments, differing slightly or substantially from those described herein, will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. Such alternate embodiments include, but are not limited to, down-converting different combinations of modulation techniques in an "I/Q" mode. Other embodiments include those shown in the documents referenced above, including but not limited to U.S. patent application Ser. Nos. 09/525,615 and 09/550,644. Such alternate embodiments fall within the scope and spirit of the present invention.

For example, other receiver embodiments may down-convert signals that have been modulated with other modulation techniques. These would be apparent to one skilled in the relevant art(s) based on the teachings disclosed herein, and include, but are not limited to, amplitude modulation (AM), frequency modulation (FM), pulse width modulation, quadrature amplitude modulation (QAM), quadrature phase-shift keying (QPSK), time division multiple access (TDMA), frequency division multiple access (FDMA), code division

27

multiple access (CDMA), down-converting a signal with two forms of modulation embedding thereon, and combinations thereof.

3.2 Transmitter Embodiments

The following discussion describes frequency up-converting signals transmitted according to the present invention, using a Universal Frequency Up-conversion Module. Frequency up-conversion of an EM signal is described above, and is more fully described in U.S. Pat. No. 6,091,940 entitled "Method and System for Frequency Up-Conversion," filed Oct. 21, 1998 and issued Jul. 18, 2000, the full disclosure of which is incorporated herein by reference in its entirety, as well as in the other documents referenced above (see, for example, U.S. patent application Ser. No. 09/525,615).

Exemplary embodiments of a transmitter according to the invention are described below. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein) will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

In embodiments, the transmitter includes a universal frequency up-conversion (UFU) module for frequency up-converting an input signal. For example, in embodiments, the system transmitter includes the UFU module **1000**, the UFU module **1101**, or the UFU module **1290** as described, above, in reference to FIGS. **10**, **11** and **12**, respectively. In further embodiments, the UFU module is used to both modulate and up-convert an input signal.

3.2.1 In-Phase/Quadrature-Phase (I/Q) Modulation Mode Transmitter Embodiments

In FIG. **22**, an I/Q modulation mode transmitter embodiment is presented. In this embodiment, two information signals are accepted. An in-phase signal ("I") is modulated such that its phase varies as a function of one of the information signals, and a quadrature-phase signal ("Q") is modulated such that its phase varies as a function of the other information signal. The two modulated signals are combined to form an "I/Q" modulated signal and transmitted. In this manner, for instance, two separate information signals could be transmitted in a single signal simultaneously. Other uses for this type of modulation would be apparent to persons skilled in the relevant art(s).

FIG. **22** illustrates an exemplary block diagram of a transmitter **2202** in an I/Q modulation mode. In FIG. **22**, a base-band signal comprises two signals, first information signal **2212** and second information signal **2214**. Transmitter **2202** comprises an I/Q transmitter **2204** and an optional amplifier **2206**. I/Q transmitter **2204** comprises at least one UFT module **2210**. I/Q transmitter **2204** provides I/Q modulation to first information signal **2212** and second information signal **2214**, outputting I/Q output signal **2216**. Optional amplifier **2206** optionally amplifies I/Q output signal **2216**, outputting up-converted signal **2218**.

FIG. **23** illustrates a more detailed circuit block diagram for I/Q transmitter **2204**. I/Q transmitter **2204** is described herein for purposes of illustration, and not limitation. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein) will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

I/Q transmitter **2204** comprises a first UFU module **2302**, a second UFU module **2304**, an oscillator **2306**, a phase shifter **2308**, a summer **2310**, a first UFT module **2312**, a second UFT module **2314**, a first phase modulator **2328**, and a second phase modulator **2330**.

28

Oscillator **2306** generates an "I"-oscillating signal **2316**.

A first information signal **2212** is input to first phase modulator **2328**. The "I"-oscillating signal **2316** is modulated by first information signal **2212** in the first phase modulator **2328**, thereby producing an "I"-modulated signal **2320**.

First UFU module **2302** inputs "I"-modulated signal **2320**, and generates a harmonically rich "I" signal **2324** with a continuous and periodic wave form.

The phase of "I"-oscillating signal **2316** is shifted by phase shifter **2308** to create "Q"-oscillating signal **2318**. Phase shifter **2308** preferably shifts the phase of "I"-oscillating signal **2316** by 90 degrees.

A second information signal **2214** is input to second phase modulator **2330**. "Q"-oscillating signal **2318** is modulated by second information signal **2214** in second phase modulator **2330**, thereby producing a "Q" modulated signal **2322**.

Second UFU module **2304** inputs "Q" modulated signal **2322**, and generates a harmonically rich "Q" signal **2326**, with a continuous and periodic waveform.

Harmonically rich "I" signal **2324** and harmonically rich "Q" signal **2326** are preferably rectangular waves, such as square waves or pulses (although the invention is not limited to this embodiment), and are comprised of pluralities of sinusoidal waves whose frequencies are integer multiples of the fundamental frequency of the waveforms. These sinusoidal waves are referred to as the harmonics of the underlying waveforms, and a Fourier analysis will determine the amplitude of each harmonic.

Harmonically rich "I" signal **2324** and harmonically rich "Q" signal **2326** are combined by summer **2310** to create harmonically rich "I/Q" signal **2334**. Summers are well known to persons skilled in the relevant art(s).

Optional filter **2332** filters out the undesired harmonic frequencies, and outputs an I/Q output signal **2216** at the desired harmonic frequency or frequencies.

It will be apparent to persons skilled in the relevant art(s) that an alternative embodiment exists wherein the harmonically rich "I" signal **2324** and the harmonically rich "Q" signal **2326** may be filtered before they are summed, and further, another alternative embodiment exists wherein "I"-modulated signal **2320** and "Q"-modulated signal **2322** may be summed to create an "I/Q"-modulated signal before being routed to a switch module. Other "I/Q"-modulation embodiments will be apparent to persons skilled in the relevant art(s) based upon the teachings herein, and are within the scope of the present invention. Further details pertaining to an I/Q modulation mode transmitter are provided in co-pending U.S. Pat. No. 6,091,940 entitled "Method and System for Frequency Up-Conversion," filed Oct. 21, 1998 and issued Jul. 18, 2000, which is incorporated herein by reference in its entirety.

3.2.2 Enhanced Multi-Switch Transmitter Embodiments

As described herein, multi-switch transmitter embodiments of the present invention are enhanced to maximize both power transfer and information transmission. These embodiments are described herein for purposes of illustration, and not limitation. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

FIG. **24A** is an example two-switch transmitter **2402** according to an embodiment of the invention. Transmitter **2402** comprises two switching devices **2408** and **2410**, two aperture generators **2412** and **2414**, an impedance device **2419**, and two amplifiers **2432** and **2434**.

29

As shown in FIG. 24A, amplifiers 2432 and 2434, and impedance device 2419 are coupled together to form a node 2409. Node 2409 is an AC ground. In an embodiment, impedance device 2419 is an inductor. Impedance device 2419 comprises a feedback path that passes DC signals to the inputs of amplifiers 2432 and 2434, thereby removing the DC signals from the output of transmitter 2402. The output ports of amplifiers 2432 and 2434 are coupled to switching devices 2408 and 2410. Switching devices 2408 and 2410, and impedance device 2419 are coupled together to form a node 2405. The output of transmitter 2402 is generated at node 2405, across a load impedance 2470. Load impedance 2470 is illustrative, and not intended to limit the invention.

In an embodiment, optional energy storage devices (capacitors) 2431 and 2433 are coupled to transmitter 2402, as shown in FIG. 24A, in order to increase the efficiency of transmitter 2402. Energy storage devices 2431 and 2433. These devices store energy when switches 2408 and 2410 are open, thereby enhancing the energy transmitted when switches 2408 and 2410 close. Energy storage devices 2431 and 2433 can be coupled to any bias (AC ground).

It is a feature of example transmitter 2402, as well as a feature of other embodiments of the invention, that no power summer is needed at node 2405 so long as the apertures of switching devices 2408 and 2410 do not overlap. A simple wire can be used to couple transmitter 2402 to load impedance 2470. Other approaches may also be used.

The operation of transmitter 2402 will now be described with reference to the waveforms illustrated in FIGS. 24B-24F.

An information signal 2442 to be up-converted is provided to the input(+) port of amplifier 2442 (see FIG. 24E). As shown in FIG. 24E, information signal 2442 is a sine wave. An inverted version of information signal 2442 (i.e., signal 2444) is provided to the input(-) port of amplifier 2434. Signal 2444 is shown in FIG. 24E.

Input signals 2442 and 2444 are operated on by amplifiers 2432 and 2434 in a manner that would be known to a person skilled in the relevant art to produce signals at the outputs of amplifiers 2432 and 2434 that are a function of (i.e., proportional to) the input signals 2442 and 2444. When switch 2408 is closed, the output signal of amplifier 2432 is coupled to load impedance 2470, and thereby produces a positive voltage at the input of impedance 2470 such as, for example, voltage 2405B shown in FIG. 24C. Similarly, when switch 2410 is closed, the output signal of amplifier 2434 is coupled to load impedance 2470, and thereby produces a negative voltage at the input of impedance 2470 such as, for example, voltage 2405A shown in FIG. 24C. The operation of switching devices 2408 and 2410 are controlled by control signals 2446 and 2448. These signals are illustrated in FIGS. 24B and 24C. Control signal 2446 controls the switching of switching device 2408. Control signal 2448 controls the switching of switching device 2410.

As can be seen in FIG. 24B, the opening and closing of switching devices 2408 and 2410 produce a harmonically rich up-converted signal 2405. Up-converted signal 2405 is also illustrated in FIGS. 24D and 24E. In particular, FIG. 24E illustrates the relationship between input signals 2442 and 2444 and up-converted signal 2405.

FIG. 24F illustrates a portion of Fourier transform of up-converted signal 2405. As illustrated in FIG. 24F, signal 2405 of transmitter 2402 is a harmonically rich signal. The particular portion of signal 2405 that is to be transmitted can be selected using a filter. For example, a high Q filter centered at 1.0 GHz can be used to select the 3rd harmonic portion of signal 2405 for transmission. A person skilled in the relevant

30

arts will understand how to do this given the description of the invention herein. In embodiments, the output signal 2405 is routed to a filter (not shown) to remove the unwanted frequencies that exist as harmonic components of the harmonically rich signal. A desired frequency is optionally amplified by an amplifier module (not shown) and then optionally routed to a transmission module (not shown) for transmission.

As described herein, optional energy storage devices 2431 and 2433 as well as impedance matching techniques can be used to improve the efficiency of transmitter 2402.

FIGS. 24G-24K further illustrate the operation of transmitter 2402 when transmitter 2402 is used, for example, to transmit digital information represented by the input signals shown in FIGS. 24G and 24H. FIG. 24G illustrates an example digital signal 2442 that represents a bit sequence of "1011." The inverse of signal 2442 (i.e., 2444) is illustrated in FIG. 24H. Input signals 2442 and 2444 are input to amplifiers 2432 and 2434, as described above. FIG. 24I illustrates an example control 2446. FIG. 24J illustrates an example control signal 2448. A harmonically rich up-converted signal 2405, for the input signals 2442 and 2444 (shown in FIGS. 24G and 24H), is shown in FIG. 24K. Signal 2405 of FIG. 24K is obtained in the manner described above.

The example waveforms of FIGS. 24B-24K are illustrative, and not intended to limit the invention. Waveforms other than those illustrated in FIGS. 24B-24K are intended to be used with the architecture that comprises transmitter 2402.

FIG. 25A is an example two-switch transmitter 2502 according to an embodiment of the invention. Transmitter 2502 comprises two switching devices 2508 and 2510, two aperture generators 2512 and 2514, three impedance devices 2519, 2533, and 2535, and two amplifiers 2532 and 2534.

As shown in FIG. 25A, amplifiers 2532, 2534, switching devices 2508, 2510, and impedance device 2519 are coupled together to form a node 2509. Node 2509 is an AC ground. In an embodiment, impedance device 2519 is an inductor. Impedance device 2519 comprises a feedback path that passes DC signals to the inputs of amplifiers 2532 and 2534, thereby removing the DC signals from the output of transmitter 2502. The output ports of amplifiers 2532 and 2534 are coupled to impedance devices 2533 and 2535. Impedance devices 2533 and 2535 represent one or more impedance devices that act as an AC choke (low pass filter). Impedance devices 2533, 2535, switching devices 2508, 2510, and impedance device 2519 are also coupled together to form a node 2505. The output of transmitter 2502 is generated at node 2505, across a load impedance 2570.

The operation of switching devices 2508 and 2510 is controlled by control signals 2546 and 2548. Example control signals are illustrated in FIGS. 25D and 25E. Control signal 2546 controls the switching of switching device 2508. Control signal 2548 controls the switching of switching device 2510.

The operation of transmitter 2502 is similar to that of transmitter 2402, and thus is not repeated here. A person skilled in the relevant art will understand how transmitter 2502 operates given the description of the invention herein.

FIGS. 25B-25F illustrate the operation of transmitter 2502 when transmitter 2502 is used, for example, to transmit digital information represented by the input signals shown in FIGS. 25B and 25C. The example waveforms of FIGS. 25B-25F are illustrative, and not intended to limit the invention. Waveforms other than those illustrated in FIGS. 25B-25F are intended to be used with the architecture that comprises transmitter 2502.

FIG. 25B illustrates an example digital signal 2542 that represents a bit sequence of "1011." The inverse of signal

31

2542 (i.e., 2544) is illustrated in FIG. 25C. Input signals 2542 and 2544 are input to amplifiers 2532 and 2534. FIG. 25D illustrates an example control signal 2548. A harmonically rich up-converted signal 2550, for the input signals 2542 and 2544 is shown in FIG. 25F.

As described herein for transmitter 2402, optional energy storage devices (not shown) as well as impedance matching techniques can be used to improve the efficiency of transmitter 2502. How this is achieved in accordance with will be understood by a person skilled in the relevant arts given the description herein.

FIG. 26A is example of a multi-switch transmitter 2602 according to an embodiment of the invention. Transmitter 2602 comprises four switching devices 2608A, 2608B, 2610A, and 2610B, two aperture generators 2612 and 2614, and two amplifiers 2632 and 2634. Transmitter 2602 is shown having two optional energy storage devices 2613 and 2615.

The operation of transmitter 2602 is similar to that of transmitter 2402. An information signal to be up-converted is provided to the input(+) port of amplifier 2642. An inverted version of information signal 2642 (i.e., signal 2644) is provided to the input(-) port of amplifier 2634.

Input signals 2642 and 2644 are operated on by amplifiers 2632 and 2634 in a manner that would be known to a person skilled in the relevant art to produce signals at the outputs of amplifiers 2632 and 2634 that are a function of (i.e., proportional to) the input signals 2642 and 2644. When switches 2608A or 2610B are closed, the output signal of amplifier 2632 is coupled to load impedance 2670, and thereby produces a voltage across load impedance 2670. Similarly, when switches 2608B or 2610A are closed, the output signal of amplifier 2634 is coupled to load impedance 2670, and thereby produces a voltage across load impedance 2670. The operation of switching devices 2608A, 2608B, 2610A and 2610B are controlled by control signals 2646 and 2648, as shown in FIG. 26A. Control signal 2646 controls the switching of switching devices 2608A and 2608B. Control signal 2648 controls the switching of switching devices 2610A and 2610B.

As described herein, the opening and closing of switching devices 2608A, 2608B, 2610A and 2610B produce a harmonically rich up-converted signal. In embodiments, the up-converted signal is routed to a filter (not shown) to remove the unwanted frequencies that exist as harmonic components of the harmonically rich signal. A desired frequency is optionally amplified by an amplifier module (not shown) and then optionally routed to a transmission module (not shown) for transmission.

As described herein, optional energy storage devices 2613 and 2615 as well as impedance matching techniques can be used to improve the efficiency of transmitter 2602.

As seen in FIG. 26A, the architecture of receiver 2602 enhances the amount of energy transferred to the load by using four switches and differential load configurations. Thus, there is about a 3 db gain in the output of transmitter 2602 over that of transmitter 2402. A person skilled in the relevant art will understand how transmitter 2502 operates given the description of the invention herein.

FIGS. 26B-26F are example waveforms that illustrate the operation of transmitter 2602. An information signal 2642 to be up-converted is provided to the input(+) port of amplifier 2632. As shown in FIG. 26B, information signal 2642 is a series of digital bits (1011). An inverted version of information signal 2642 (i.e., signal 2644) is provided to the input(-) port of amplifier 2634. Signal 2644 is shown in FIG. 26C.

32

The operation of switching devices 2608A, 2608B, 2610A and 2610B are controlled by control signals 2646 and 2648. These signals are illustrated in FIGS. 26D and 26E. Control signal 2646 controls the switching of switching devices 2608A and 2608B. Control signal 2648 controls the switching of switching devices 2610A and 2610B.

FIG. 26F illustrates the output signal 2672 of transmitter 2602 for input signals 2642 and 2644. The up-converted signal is obtain from the output signal of transmitter 2602 in a manner similar to that described herein, for example, for a harmonically rich signal.

3.2.3 Enhanced One-Switch Transmitter Embodiments

As described herein, one-switch transmitter embodiments of the present invention are enhanced to maximize both power transfer and information transmission. These embodiments are described herein for purposes of illustration, and not limitation. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments. FIG. 27A is an example one-switch transmitter 2702 according to an embodiment of the invention. Transmitter 2702 comprises one switching device 2708, an aperture generator 2712, two capacitors 2704 and 2706, two impedance devices 2716 and 2718, and two amplifiers 2732 and 2734.

The operation of transmitter 2702 is similar to that of the other transmitters described above. An input signal 2742 is supplied to amplifier 2732. Input signal 2732 is inverted by an inverter 2703 and the output of inverter 2703 is supplied to the input of amplifier 2734. Amplifiers 2732 and 2734 operate on input signals 2742 and 2744 in a manner that would be known to a person skilled in the relevant arts to produce signals at the outputs of amplifiers 2732 and 2734. When switching device 2708 is open, energy is transferred from the outputs of amplifiers 2732 and 2734 to energy storage devices (capacitors) 2704 and 2706. When switching device 2708 is closed, energy storage devices 2704 and 2706 discharge, thereby transferring energy to load impedance 2770. This causes an output signal 2772 (e.g., as shown in FIG. 27E) to be generated across load impedance 2770. Impedance devices 2716 and 2718 operate as AC chokes (filters).

FIGS. 27B-27E are example waveforms that illustrate the operation of transmitter 2702. An information signal 2742 to be up-converted shown in FIG. 27B. As shown in FIG. 27B, information signal 2742 is a series of digital bits (1011). An inverted version of information signal 2742 (i.e., signal 2744) is shown in FIG. 27C.

The operation of switching device 2708 is controlled by control signal 2746. This signal is illustrated in FIG. 27D.

FIG. 27E illustrates the output signal 2772 of transmitter 2702, which is generated across load impedance 2770. The up-converted signal is obtained from the output signal of transmitter 2702 in a manner similar to that described elsewhere herein for a harmonically rich signal.

3.2.4 Other Transmitter Embodiments

The transmitter embodiments described above are provided for purposes of illustration. These embodiments are not intended to limit the invention. Alternate embodiments, differing slightly or substantially from those described herein, will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. Such alternate embodiments include, but are not limited to, combinations of modulation techniques in an "I/Q" mode. Such embodiments also include those described in the documents referenced above, such as U.S. patent application Ser. Nos. 09/525,615 and

33

09/550,644. Such alternate embodiments fall within the scope and spirit of the present invention.

For example, other transmitter embodiments may utilize other modulation techniques. These would be apparent to one skilled in the relevant art(s) based on the teachings disclosed herein, and include, but are not limited to, amplitude modulation (AM), frequency modulation (FM), pulse width modulation, quadrature amplitude modulation (QAM), quadrature phase-shift keying (QPSK), time division multiple access (TDMA), frequency division multiple access (FDMA), code division multiple access (CDMA), embedding two forms of modulation onto a signal for up-conversion, etc., and combinations thereof.

3.3 Transceiver Embodiments

An exemplary embodiment of a transceiver system **2800** of the present invention is illustrated in FIG. **28**. Transceiver **2802** frequency down-converts first EM signal **2808** received by antenna **2806**, and outputs down-converted baseband signal **2812**. Transceiver **2802** comprises at least one UFT module **2804** at least for frequency down-conversion.

Transceiver **2802** inputs baseband signal **2814**. Transceiver **2802** frequency up-converts baseband signal **2814**. UFT module **2804** provides at least for frequency up-conversion. In alternate embodiments, UFT module **2804** only supports frequency down-conversion, and at least one additional UFT module provides for frequency up-conversion. The up-converted signal is output by transceiver **2802**, and transmitted by antenna **2806** as second EM signal **2810**.

First and second EM signals **2808** and **2810** may be of substantially the same frequency, or of different frequencies. First and second EM signals **2808** and **2810** may have been modulated using the same technique, or may have been modulated by different techniques.

Further example embodiments of receiver/transmitter systems applicable to the present invention may be found in U.S. Pat. No. 6,091,940 entitled "Method and System for Frequency Up-Conversion," incorporated by reference in its entirety.

These example embodiments and other alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the example embodiments described herein) will be apparent to persons skilled in the relevant art(s) based on the referenced teachings and the teachings contained herein, and are within the scope and spirit of the present invention. The invention is intended and adapted to include such alternate embodiments.

3.3.1 Example Half-Duplex Mode Transceiver

An exemplary receiver using universal frequency down conversion techniques is shown in FIG. **29** and described below. An antenna **2902** receives an electromagnetic (EM) signal **2920**. EM signal **2920** is routed through a capacitor **2904** to a first terminal of a switch **2910**. The other terminal of switch **2910** is connected to ground **2912** in this exemplary embodiment. A local oscillator **2906** generates an oscillating signal **2928**, which is routed through a pulse shaper **2908**. The result is a string of pulses **2930**. The selection of the oscillator **2906** and the design of the pulse shaper **2908** control the frequency and pulse width of the string of pulses **2930**. The string of pulses **2930** control the opening and closing of switch **2910**. As a result of the opening and closing of switch **2910**, a down converted signal **2922** results. Down converted signal **2922** is routed through an amplifier **2914** and a filter **2916**, and a filtered signal **2924** results. In a preferred embodiment, filtered signal **2924** is at baseband, and a decoder **2918** may only be needed to convert digital to analog or to remove encryption before outputting the baseband information signal. This then is a universal frequency down conversion

34

receiver operating in a direct down conversion mode, in that it receives the EM signal **2920** and down converts it to baseband signal **2926** without requiring an IF or a demodulator. In an alternate embodiment, the filtered signal **2924** may be at an "offset" frequency. That is, it is at an intermediate frequency, similar to that described above for the second IF signal in a typical superheterodyne receiver. In this case, the decoder **2918** would be used to demodulate the filtered signal so that it could output a baseband signal **2926**.

An exemplary transmitter using the present invention is shown in FIG. **30**. In the FM and PM embodiments, an information signal **3002** modulates an oscillating signal **3006** which is routed to a pulse shaping circuit **3010** which outputs a string of pulses **3011**. The string of pulses **3011** controls the opening and closing of the switch **3012**. One terminal of switch **3012** is connected to ground **3014**, and the second terminal of switch **3012** is connected through a resistor **3030** to a bias/reference signal **3008**. In some FM and PM modes, bias/reference signal **3008** is preferably a non-varying signal, often referred to simply as the bias signal. In some AM modes, the oscillating signal **3006** is not modulated, and the bias/reference signal **3008** is a function of the information signal **3004**. In one embodiment, information signal **3004** is combined with a bias voltage to generate the reference signal **3008**. In an alternate embodiment, the information signal **3004** is used without being combined with a bias voltage. Typically, in the AM mode, this bias/reference signal is referred to as the reference signal to distinguish it from the bias signal used in the FM and PM modes. The output of switch **3012** is a harmonically rich signal **3016** which is routed to an optional "high Q" filter which removes the unwanted frequencies that exist as harmonic components of harmonically rich signal **3016**. Desired frequency **3020** is optionally amplified by an optional amplifier module **3022** and routed to transmission module **3024**, which outputs a transmission signal **3026**. Transmission signal is output by antenna **3028** in this embodiment.

For the FM and PM modulation modes, FIGS. **31A**, **31B**, and **31C** show the combination of the present invention of the transmitter and the universal frequency down-conversion receiver in the half-duplex mode according to an embodiment of the invention. That is, the transceiver can transmit and receive, but it cannot do both simultaneously. It uses a single antenna **3102**, a single oscillator **3144/3154** (depending on whether the transmitter is in the FM or PM modulation mode), a single pulse shaper **3138**, and a single switch **3120** to transmit and to receive. In the receive function, "Receiver/transmitter" (R/T) switches **3106**, **3108**, and **3146/3152** (FM or PM) would all be in the receive position, designated by (R). The antenna **3102** receives an EM signal **3104** and routes it through a capacitor **3107**. In the FM modulation mode, oscillating signal **3136** is generated by a voltage controlled oscillator (VCO) **3144**. Because the transceiver is performing the receive function, switch **3146** connects the input to the VCO **3144** to ground **3148**. Thus, VCO **3144** will operate as if it were a simple oscillator. In the PM modulation mode, oscillating signal **3136** is generated by local oscillator **3154**, which is routed through phase modulator **3156**. Since the transceiver is performing the receive function, switch **3152** is connected to ground **3148**, and there is no modulating input to phase modulator. Thus, local oscillator **3154** and phase modulator **3156** operate as if they were a simple oscillator. One skilled in the relevant art(s) will recognize based on the discussion contained herein that there are numerous embodiments wherein an oscillating signal **3136** can be generated to control the switch **3120**.

35

Oscillating signal **3136** is shaped by pulse shaper **3138** to produce a string of pulses **3140**. The string of pulses **3140** cause the switch **3120** to open and close. As a result of the switch opening and closing, a down converted signal **3109** is generated. The down converted signal **3109** is optionally amplified and filtered to create a filtered signal **3113**. In an embodiment, filtered signal **3113** is at baseband and, as a result of the down conversion, is demodulated. Thus, a decoder **3114** may not be required except to convert digital to analog or to decrypt the filtered signal **3113**. In an alternate embodiment, the filtered signal **3113** is at an "offset" frequency, so that the decoder **3114** is needed to demodulate the filtered signal and create a demodulated baseband signal.

When the transceiver is performing the transmit function, the R/T switches **3106**, **3108**, and **3146/3152** (FM or PM) are in the (T) position. In the FM modulation mode, an information signal **3150** is connected by switch **3146** to VCO **3144** to create a frequency modulated oscillating signal **3136**. In the PM modulation mode switch **3152** connects information signal **3150** to the phase modulator **3156** to create a phase modulated oscillating signal **3136**. Oscillation signal **3136** is routed through pulse shaper **3138** to create a string of pulses **3140**, which in turn cause switch **3120** to open and close. One terminal of switch **3120** is connected to ground **3142** and the other is connected through switch R/T **3108** and resistor **3123** to a bias signal **3122**. The result is a harmonically rich signal **3124** which is routed to an optional "high Q" filter **3126** which removes the unwanted frequencies that exist as harmonic components of harmonically rich signal **3124**. Desired frequency **3128** is optionally amplified by amplifier module **3130** and routed to transmission module **3132**, which outputs a transmission signal **3134**. Again, because the transceiver is performing the transmit function, R/T switch **3106** connects the transmission signal to the antenna **3102**.

In the AM modulation mode, the transceiver operates in the half duplex mode as shown in FIG. 32. The only distinction between this modulation mode and the FM and PM modulation modes described above, is that the oscillating signal **3136** is generated by a local oscillator **3202**, and the switch **3120** is connected through the R/T switch **3108** and resistor **3123** to a reference signal **3206**. Reference signal **3206** is generated when information signal **3150** and bias signal **3122** are combined by a summing module **3204**. It is well known to those skilled in the relevant art(s) that the information signal **3150** may be used as the reference signal **3206** without being combined with the bias signal **3122**, and may be connected directly (through resistor **3123** and R/T switch **3108**) to the switch **3120**.

3.3.2 Example Full-Duplex Mode Transceiver

The full-duplex mode differs from the half-duplex mode in that the transceiver can transmit and receive simultaneously. Referring to FIG. 33, to achieve this, the transceiver preferably uses a separate circuit for each function. A duplexer **3304** is used in the transceiver to permit the sharing of an antenna **3302** for both the transmit and receive functions.

The receiver function performs as follows. The antenna **3302** receives an EM signal **3306** and routes it through a capacitor **3307** to one terminal of a switch **3326**. The other terminal of switch **3326** is connected to ground **3328**, and the switch is driven as a result of a string of pulses **3324** created by local oscillator **3320** and pulse shaper **3322**. The opening and closing of switch **3326** generates a down converted signal **3314**. Down converted signal **3314** is routed through an amplifier **3308** and a filter **3310** to generate filtered signal **3316**. Filtered signal **3316** may be at baseband and be demodulated or it may be at an "offset" frequency. If filtered signal **3316** is at an offset frequency, decoder **3312** will demodulate it to

36

create the demodulated baseband signal **3318**. In a preferred embodiment, however, the filtered signal **3316** will be a demodulated baseband signal, and decoder **3312** may not be required except to convert digital to analog or to decrypt filtered signal **3316**. This receiver portion of the transceiver can operate independently from the transmitter portion of the transceiver.

The transmitter function is performed as follows. In the FM and PM modulation modes, an information signal **3348** modulates an oscillating signal **3330**. In the AM modulation mode, the oscillating signal **3330** is not modulated. The oscillating signal is shaped by pulse shaper **3332** and a string of pulses **3334** is created. This string of pulses **3334** causes a switch **3336** to open and close. One terminal of switch **3336** is connected to ground **3338**, and the other terminal is connected through a resistor **3347** to a bias/reference signal **3346**. In the FM and PM modulation modes, bias/reference signal **3346** is referred to as a bias signal **3346**, and it is substantially non-varying. In the AM modulation mode, an information signal **3350** may be combined with the bias signal to create what is referred to as the reference signal **3346**. The reference signal **3346** is a function of the information signal **3350**. It is well known to those skilled in the relevant art(s) that the information signal **3350** may be used as the bias/reference signal **3346** directly without being summed with a bias signal. A harmonically rich signal **3352** is generated and is filtered by a "high Q" filter **3340**, thereby producing a desired signal **3354**. The desired signal **3354** is amplified by amplifier **3342** and routed to transmission module **3344**. The output of transmission module **3344** is transmission signal **3356**. Transmission signal **3356** is routed to duplexer **3304** and then transmitted by antenna **3302**. This transmitter portion of the transceiver can operate independently from the receiver portion of the transceiver.

Thus, as described above, the transceiver embodiment the present invention as shown in FIG. 33 can perform full-duplex communications in all modulation modes.

3.3.3 Enhanced Single Switch Transceiver Embodiment

As described herein, one-switch transceiver embodiments of the present invention are enhanced to maximize power transfer and information extraction and transmission. These embodiments are described herein for purposes of illustration, and not limitation. Alternate embodiments (including equivalents, extensions, variations, deviations, etc., of the embodiments described herein), will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The invention is intended and adapted to include such alternate embodiments.

FIG. 34 is an example one-switch transceiver **3402** according to an embodiment of the invention. The operation of this embodiment as a receiver is described above with regard to FIGS. 18A-E. The operation of this embodiment as a transmitter is described above with regard to FIGS. 27A-E. Also described above is a means for coupling receiver and transmitter embodiments of the invention to an antenna. Thus, given the description herein, a person skilled in the relevant arts will understand the operation of transceiver **3402**.

3.3.4 Other Embodiments

The embodiments described above are provided for purposes of illustration. These embodiments are not intended to limit the invention. Alternate embodiments, differing slightly or substantially from those described herein, will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. Such alternate embodiments fall within the scope and spirit of the present invention.

37

4 Enhanced Operating Features of the Invention

As described herein, embodiments of the present invention enable enhanced operating features. These enhanced features enable receivers and transceivers according to the invention to down-convert a modulated carrier signal while extracting power from the carrier signal. This is in contrast to conventional receivers and transceivers, which ideally extract zero power from a received carrier signal (i.e., conventional receivers are typically designed to operate as impulse samplers). These enhanced features of the present invention also enable the linear operating ranges for embodiments of the invention to be extended.

4.1 Enhanced Power and Information Extraction Features

Enhanced features of the invention enable the invention to down-convert a modulated carrier signal while extracting power from the signal. These features are not found in conventional receivers.

As described herein, embodiments of the invention are implemented using one or more aliasing modules **300** (see for example FIGS. **3A** and **3G**). Differences between receiver embodiments according to the present invention and conventional receivers are illustrated in FIG. **36-41**. For example, consider aliasing module **300** as shown in FIG. **3A**. Aliasing module **300** down-converts an input signal **304** to form an output signal **312** as described herein.

FIG. **36** illustrates a modulated carrier signal **3602** that can be down converted using either an aliasing module **300** or a conventional receiver. Signal **3602** has a period of T_C .

In this example, to down convert signal **3602** using a conventional receiver, signal **3602** is sampled using a control signal **3702** illustrated in FIG. **37**. Control signal **3702** comprises a plurality of sampling impulses **3704**. Each impulse **3704** ideally has a zero-width aperture. The sampling period of control signal **3700** must satisfy Nyquists' sampling criteria (i.e., it must be equal to or less than one-half T_C).

In contrast to a conventional receiver, to down convert signal **3602** according to the invention, a control signal, for example control signal **3802** shown in FIG. **38**, is used. As can be seen in FIG. **38**, control signal **3802** comprises sampling apertures having significant width compared to zero-width sampling impulses **3704** of control signal **3702**. The width of the sampling apertures of control signal **3802** are T_A .

Control signal **3802** is shown having both positive magnitude apertures and negative magnitude apertures. In embodiments of the invention having two aliasing modules **300**, the positive magnitude apertures control one aliasing module **300**, and the negative magnitude apertures control another aliasing module **300**, as described above. For embodiments of the invention having only one aliasing module **300**, a control signal having only the positive magnitude apertures or the negative magnitude apertures of control signal **3802** can be used, as described herein. The period of time between two adjacent positive magnitude apertures or two adjacent negative magnitude apertures is T_D . As shown in FIG. **38**, T_D is greater than T_C .

4.2 Charge Transfer and Correlation

The description of the invention that follows teaches one skilled in the relevant arts how to determine a value for one or more capacitors to be used in embodiments of the invention. As described herein, a significant difference between conventional communications systems and the present invention is that conventional communications systems are not intended to transfer non-negligible amounts of energy from a carrier signal to be used in forming a down-converted information signal (i.e., conventional communications system do not exhibit the capacitor discharge feature of the present invention). As illustrated in FIG. **39**, the voltage signal across a

38

capacitor, for example, of a conventional sample and hold communications system ideally remains constant (i.e., there is no energy transfer or intended discharge of the charge stored by the capacitor.) In contrast, as illustrated in FIG. **40**, and as described herein with regards to embodiments of the invention, energy transfer is a feature of the present invention and capacitors (such as capacitor **310** in FIG. **3A** and capacitor **310** in FIG. **3G**) used in embodiments of the invention are sized to achieve a percent discharge between apertures of a switching (control) signal.

In embodiments of the invention such as, for example, aliasing modules **300**, one or more capacitors are sized to discharge between about six percent to about fifty percent of the total charge stored therein during a period of time that a switching device is open (i.e., between apertures). It is noted that this range is provided for illustrative purposes. Other embodiments of the invention exhibit other discharge percentages. FIG. **41** illustrates the voltage across a capacitor sized according to the invention for different rates of discharge (i.e., charge transfer).

The basic equation for charge transfer is:

$$\frac{dq}{dt} = C \frac{dv}{dt}, \text{ (assuming } C \text{ is constant over time)} \quad \text{EQ. (2)}$$

$$q = CV$$

Similarly the energy u stored by a capacitor can be found from:

$$u = \int_0^q \frac{q_x}{C} dq_x = \frac{q^2}{2C} \quad \text{EQ. (3)}$$

From EQs. (2) and (3):

$$u = \frac{CV^2}{2} \quad \text{EQ. (4)}$$

Thus, the charge stored by a capacitor is proportional to the voltage across the capacitor, and the energy stored by the capacitor is proportional to the square of the charge or the voltage. Hence, by transferring charge, voltage and energy are also transferred. If little charge is transferred, little energy is transferred, and a proportionally small voltage results unless C is lowered.

The law of conservation of charge is an extension of the law of the conservation of energy. EQ. (2) illustrates that if a finite amount of charge must be transferred in an infinitesimally short amount of time then the voltage, and hence voltage squared, tends toward infinity. Furthermore,

$$V_c = \frac{1}{C} \int_0^{T_A} i dt \quad \text{EQ. (5)}$$

This implies an infinite amount of current must be supplied to create the infinite voltage, if T_A is infinitesimally small. As will be understood by a person skilled in the relevant art, such a situation is impractical, especially for a device without gain.

Generally speaking, in radio communications systems, the antenna produces a small amount of power available for the first conversion, even with amplification from an LNA.

39

Hence, if a finite voltage and current restriction do apply to the front end of a radio then a conversion device, which is an impulse sampler, must by definition possess infinite gain. This would not be practical for a switch. What is usually approximated in practice is a fast sample time, charging a small capacitor, then holding the value acquired by a hold amplifier, which preserves the voltage from sample to sample (i.e., a sample and hold system is used).

The analysis that follows shows that given a finite amount of time for energy transfer through a conversion device, the impulse response of the ideal processor, which transfers energy to a capacitor when the input voltage source is a sinusoidal carrier and possesses a finite source impedance, is achieved by embodiments of the present invention. If a significant amount of energy can be transferred in the sampling process, the tolerance on the charging capacitor can be reduced and the requirement for a hold amplifier is significantly reduced or even eliminated.

In embodiments, the maximum amount of energy available over a half sine pulse can be found from:

$$u = \int_0^{T_A} S_i^2(t) dt = \frac{A^2 T_A}{2} \quad (A^2 \pi / 2 \text{ for } \omega_c = 1) \quad \text{EQ. (6)}$$

This points to a correlation processor or matched filter processor. If energy is of interest then a useful processor, which transfers all of the half sine energy, is revealed in EQ. (5), where T_A is an aperture equivalent to the half sine pulse. In embodiments, EQ. (6) provides the insight to an enhanced processor.

Consider the following equation sequence:

$$\int_0^\infty h(\tau) S_i(t - \tau) d\tau \Rightarrow \int_0^{T_A} k S_i^2(T_A - \tau) d\tau \Rightarrow \int_0^{T_A} S_i^2(t) dt \quad \text{EQ. (7)}$$

where $h(\mathcal{G}) = S_i(T_A - \mathcal{G})$ and $t = T_A - \mathcal{G}$. This is a matched filter equation with the far most right hand side revealing a correlator implementation, which is obtained by a change of variables as indicated. Note that the correlator form of the matched filter is a statement of the desired signal energy. Therefore a matched filter/correlator accomplishes acquisition of all the energy available across a finite duration aperture. Such a matched filter/correlator can be implemented as shown in FIG. 54.

In embodiments, when configured for enhanced operation, the example matched filter/correlator of FIG. 54 operates in synchronism with the half sine pulse $S_i(t)$ over the aperture T_A . Phase skewing and phase roll will occur for clock frequencies, which are imprecise. Such imprecision can be compensated for by a carrier recovery loop, such as a Costas Loop. A Costas Loop can develop the control for the acquisition clock, which also serves as a sub-harmonic carrier. However, phase skew and non-coherency does not invalidate the enhanced form of the processor provided that the frequency or phase errors are small, relative to T_A^{-1} . Non-coherent and differentially coherent processors may extract energy from both I and Q with a complex correlation operation followed by a rectifier or phase calculator. It has been shown that phase skew does not alter the optimum SNR processor formulation. The energy that is not transferred to I is transferred to Q and vice versa when phase skew exists. This is an example pro-

40

cessor for a finite duration sample window with finite gain sampling function, where energy or charge is the desired output.

Some matched filter/correlator embodiments according to the present invention might, however, be too expensive and complicated to build for some applications. In such cases, other processes and processors according to embodiments of the invention can be used. The approximation to the matched filter/correlator embodiment shown in FIG. 55 is one embodiment that can be used in such instances. The finite time integrator embodiment of FIG. 55 requires only a switch and an integrator. This embodiment of the present invention has only a 0.91 dB difference in SNR compared to the matched filter/correlator embodiment.

Another low cost and easy to build embodiment of the present invention is an RC processor. This embodiment, shown in FIG. 56, utilizes a low cost integrator or capacitor as a memory across the aperture. If C is suitably chosen for this embodiment, its performance approaches that of the matched filter/correlator embodiment, shown in FIG. 54. Notice the inclusion of the source impedance, R, along with the switch and capacitor. This embodiment nevertheless can approximate the energy transfer of the matched filter/correlator embodiment.

When maximum charge is transferred, the voltage across the capacitor 5604 in FIG. 56 is maximized over the aperture period for a specific RC combination.

Using EQs. (2) and (5) yields:

$$q = C \cdot \frac{1}{C} \int_0^{T_A} i_c dt \quad \text{EQ. (8)}$$

If it is accepted that an infinite amplitude impulse with zero time duration is not available or practical, due to physical parameters of capacitors like ESR, inductance and breakdown voltages, as well as currents, then EQ. (8) reveals the following important considerations for embodiments of the invention:

The transferred charge, q, is influenced by the amount of time available for transferring the charge;

The transferred charge, q, is proportional to the current available for charging the energy storage device; and

Maximization of charge, q, is a function of i_c , C, and T_A .

Therefore, it can be shown that for embodiments:

$$q_{\max} = C v_{\max} = C \left[\frac{1}{C} \int_0^{T_A} i_c dt \right]_{\max} \quad \text{EQ. (9)}$$

The impulse response for the RC processing network is;

$$h(t) = \frac{e^{-\frac{t}{RC}}}{RC} [u(\tau) - u(\tau - T_A)] \quad \text{EQ. (10)}$$

Suppose that T_A is constrained to be less than or equal to $\frac{1}{2}$ cycle of the carrier period. Then, for a synchronous forcing function, the voltage across a capacitor is given by EQ. (11).

41

$$V_0(t) = \int_{-\infty}^t \sin(\pi f_A \tau) \cdot \frac{e^{-\frac{(t-\tau)}{RC}}}{RC} d\tau \quad \text{EQ. (11)}$$

Maximizing the charge, q , requires maximizing $V_0(t)$ with respect to t and β .

$$\frac{\partial^2 V_0(t)}{\partial t \partial \beta} = 0 \quad \text{EQ. (12)}$$

It is easier, however, to set $R=1$, $T_A=1$, $A=1$, $f_A=T_A^{-1}$ and then calculate $q=cV_0$ from the previous equations by recognizing that

$$q = \frac{\beta^{-1}}{R} V_0 = cV_0,$$

which produces a normalized response.

FIG. 57 illustrates that increasing C is preferred in various embodiments of the invention. It can be seen in FIG. 57 that as C increases (i.e., as β decreases) the charge transfer also increases. This is what is to be expected based on the optimum SNR solution. Hence, for embodiments of the present invention, an optimal SNR design results in optimal charge transfer. As C is increased, bandwidth considerations should be taken into account.

In embodiments, EQ. (6) establishes T_A as the entire half sine for an optimal processor. However, in embodiments, optimizing jointly for t and β reveals that the RC processor response creates an output across the energy storage capacitor that peaks for $t_{max} \approx 0.75 T_A$, and $\beta_{max} \approx 2.6$, when the forcing function to the network is a half sine pulse.

In embodiments, if the capacitor of the RC processor embodiment is replaced by an ideal integrator then $t_{max} \rightarrow T_A$.

$$\beta T_A \approx 1.95 \quad \text{EQ. (13)}$$

where $\beta = (RC)^{-1}$

For example, for a 2.45 GHz signal and a source impedance of 50Ω, EQ. (13) above suggests the use of a capacitor of ≈ 2 pf. This is the value of capacitor for the aperture selected, which permits the optimum voltage peak for a single pulse accumulation. For practical realization of some embodiments of the present invention, the capacitance calculated by EQ. (13) is a minimum capacitance. SNR is not considered optimized at $\beta T_A \approx 1.95$. A smaller β yields better SNR and better charge transfer. In embodiments, it turns out that charge can also be enhanced if multiple apertures are used for collecting the charge.

In embodiments, for the ideal matched filter/correlator approximation, βT_A is constant and equivalent for both consideration of enhanced SNR and enhanced charge transfer, and charge is accumulated over many apertures for most practical designs. Consider the following example, $\beta=0.25$, and $T_A=1$. Thus $\beta T_A=0.25$. At 2.45 GHz, with $R=50\Omega$, C can be calculated from:

$$C \geq \frac{T_A}{R(0.25)} \geq 16.3 \text{ pf} \quad \text{EQ. (14)}$$

42

The charge accumulates over several apertures, and SNR is simultaneously enhanced melding the best of two features of the present invention. Checking CV for $\beta T_A \approx 1.95$ vs. $\beta T_A = 0.25$ confirms that charge is enhanced for the latter.

4.3 Load Resistor Consideration

FIG. 58 illustrates an example RC processor embodiment 5802 of the present invention having a load resistance 5804 across a capacitance 5806. As will be apparent to a person skilled in the relevant arts given the description of the invention herein, RC processor 5802 is similar to an aliasing module and/or an energy transfer module according to the invention.

The transfer function of An RC processing embodiment 5802 of the invention (without initial conditions) can be represented by the following equations:

$$H(s) = \frac{1 - e^{-sT_A}}{s} \left(\frac{1}{sCR + k} \right) \quad \text{EQ. (15)}$$

$$k = \left(\frac{R}{R_L} + 1 \right) \quad \text{EQ. (16)}$$

$$h(t) = \left(\frac{e^{-\frac{tk}{RC}}}{RC} \right) [u(t) - (t - T_A)] \quad \text{EQ. (17)}$$

From the equations, it can be seen that R_L 5804, and therefore k , accelerate the exponential decay cycle.

$$V_0(t) = \int_{-\infty}^t \sin(\pi f_A \tau) \cdot \frac{e^{-\frac{k(t-\tau)}{RC}}}{RC} d\tau \quad \text{EQ. (18)}$$

$$V_0(t) = \left(\frac{1}{k^2 + (\pi f_A)^2} \right) \left[k \cdot \sin(\pi f_A t) - \pi f_A RC \cdot \cos(\pi f_A t) + RC e^{-\frac{kt}{RC}} \right] \quad \text{EQ. (19)}$$

$$0 \leq t \leq T_A$$

This result is valid over the acquisition aperture. After the switch is opened, the final voltage that occurred at the sampling instance $t \approx T_A$ becomes an initial condition for a discharge cycle across R_L 5804. The discharge cycle possesses the following response:

$$V_D = \frac{V_A \cdot e^{-\frac{t}{R_L C}}}{R_L C} u(t - T_A) (\text{single event discharge}) \quad \text{EQ. (20)}$$

V_A is defined as $V_0(t \approx T_A)$. Of course, if the capacitor 5806 does not completely discharge, there is an initial condition present for the next acquisition cycle.

FIG. 59 illustrates an example implementation of the invention, modeled as a switch S , a capacitor C_s , and a load resistance R . FIG. 61 illustrates example energy transfer pulses, having apertures A , for controlling the switch S . FIG. 60 illustrates an example charge/discharge timing diagram for the capacitor C_s , where the capacitor C_s charges during the apertures A , and discharges between the apertures A .

Equations (21) through (35) derive a relationship between the capacitance of the capacitor $C_s(C_s(R))$, the resistance of the resistor R , the duration of the aperture A (aperture width), and the frequency of the energy transfer pulses (freq LO) in embodiments of the invention. EQ. (31) illustrates that in an embodiment optimum energy transfer occurs when $x=0.841$

43

(i.e., in this example, the voltage on the capacitor at the start of the next aperture (charging period) is about 84.1 percent of the voltage on the capacitor at the end of the preceding aperture (charging period)). Based on the disclosure herein, one skilled in the relevant art(s) will realize that values other than 0.841 can be utilized (See, for example, FIG. 41).

$$\phi = \frac{1}{C} \int i(t) dt + R i(t)$$

EQ. (21)

$$\frac{\partial}{\partial t} \phi = \frac{\partial}{\partial t} \left[\frac{1}{C} \int i(t) dt + R i(t) \right]$$

EQ. (22)

$$\phi = \frac{i(t)}{C_s} + \frac{R \partial i(t)}{\partial t}$$

EQ. (23)

$$\phi = \frac{1}{C_s} + R \cdot s$$

EQ. (24)

$$s = \frac{-1}{C_s \cdot R}, \text{ by definition: } i_{init}(t) = \frac{V_{C_s} init}{R}$$

EQ. (25)

$$i(t) = \left(\frac{V_{C_s} init}{R} \right) \cdot e^{\left(\frac{-t}{C_s \cdot R} \right)}$$

EQ. (26)

$$V_{out}(t) = R \cdot i(t) = V_{C_s} init \cdot e^{\left(\frac{-t}{C_s \cdot R} \right)}$$

EQ. (27)

Maximum power transfer occurs when:

$$\text{Power\_Final} = \frac{1}{\sqrt{2}} \cdot \text{Peak\_Power}$$

EQ. (28)

$$\text{Power\_Peak} = \frac{(V_{C_s} \text{peak})^2}{R}$$

EQ. (29)

$$\text{Power\_Final} = \frac{(x \cdot V_{C_s} \text{peak})^2}{R}$$

EQ. (30)

Using substitution:

$$\frac{(x \cdot V_{C_s} \text{peak})^2}{R} = \frac{(V_{C_s} \text{peak})^2}{R} \cdot \frac{1}{\sqrt{2}}$$

EQ. (31)

Solving for "x" yields: x=0.841.

Letting $V_{C_s} \text{init}=1$ yields $V_{out}(t)=0.841$ when

$$t = \frac{1}{\text{freqLO}} - \text{Aperture\_Width}$$

EQ. (32)

Using substitution again yields:

$$0.841 = 1 \cdot e^{\left(\frac{\frac{1}{\text{freqLO}} - \text{Aperture\_Width}}{C_s \cdot R} \right)}$$

EQ. (33)

$$\ln(0.841) = \left(\frac{\frac{1}{\text{freqLO}} - \text{Aperture\_Width}}{C_s \cdot R} \right)$$

EQ. (34)

This leads to the following EQ. (35) for selecting a capacitance.

44

$$C_s(R) = \left(\frac{\frac{1}{\text{freqLO}} - \text{Aperture\_Width}}{-\ln(0.841) \cdot R} \right) \quad \text{EQ. (35)}$$

The following equation according to the invention can be solved to find an expression for the energy accumulated over a bit time, Eb, as shown below.

$$D = \int_0^{T_A} (u(t) - u(t - T_A)) \cdot A \sin(2\pi f t + \theta) dt \quad \text{EQ. (36)}$$

$$D = A \cos(\theta) \cdot \frac{(-\cos(2\pi f t))}{(2\pi)f} \quad \text{(Evaluated from 0 to } T_A) \quad \text{EQ. (37)}$$

where u(t), u(t-T_A), and A are in volts, and D is expressed in Volts*Volts/Hz.

Realizing the f equals 1/t, D can be written as:

$$D = A \cos(\theta) \cdot \frac{(-\cos(2\pi f t))}{(2\pi)} \quad \text{EQ. (38)}$$

where D is now expressed in volts*volts*seconds.

Dividing D by the complex impedance Z of an RC processor according to the invention, when the switch (aperture) is closed, results in:

$$\frac{D}{Z} = A \cos(\theta) \cdot \frac{(-\cos(2\pi f t))}{(2\pi)Z} \quad \text{EQ. (39)}$$

(Evaluated from 0 to T_A)

Since (volts*volts)/Z equals power, and since power equals joules/second, D/Z has units of (joules/second)/second. Thus, D/Z is the amount of energy accumulated over a bit time (Eb).

A more useful expression for the energy accumulated over a bit time (Eb) is:

$$E_b = \sum_{n=1}^{\text{aperture\_per\_bit}} A_n \cos(\theta_n) \left(\frac{-\cos(2\pi f t)}{2\pi Z_n} \right) \quad \text{EQ. (40)}$$

(Evaluated from 0 to T_A)

where Eb is expressed in joules per bit.

Referring to the following equation, from above, it can be seen that there is a 2Bf term in the denominator.

$$D = A \cdot \cos(\phi) \cdot \frac{(-\cos(2 \cdot \pi \cdot f \cdot t))}{(2 \cdot \pi) \cdot f} \quad \text{EQ. (41)}$$

Analysis reveals that this term, and other terms, have physical units that allow a person skilled in the relevant art, given the discussion herein, to understand and relate the resultant quantity in a manner consistent with actual measurements of implementations of the present invention.

45

Note that as the aperture time T_a becomes smaller, the absolute value of the energy accumulated over a single aperture period is less. However, what is equally important is the fact that the energy continues to accumulate over multiple aperture periods. The number of aperture periods required to reach an optimum value is dependent on two factors: (1) the aperture period, and (2) the complex impedance (Z) of C and R when the switch is closed, as described elsewhere herein. The values of C and R can, therefore, be selected to optimize the energy transfer during the half sine sample period. By including the Z term in the equation, a person skilled in the relevant art can calculate the Energy per Bit (i.e., E_b) directly and relate the results back to embodiments of the present invention, e.g., hardware performance. This analysis can also be used to show that the optimum system performance in terms of bandwidth and power transfer occurs when the aperture period is equal to one-half of a carrier frequency cycle.

4.4 Enhancing the Linear Operating Features of Embodiments of the Invention

The analysis and description that follow explain how to enhance the linearity of embodiments of the invention. As described herein, embodiments of the present invention provide exceptional linearity per milliwatt. For example, rail to rail dynamic range is possible with minimal increase in power. In an example integrated circuit embodiment, the present invention provides +55 dmb IP2, +15 dmb IP3, @3.3V, 4.4 ma, -15 dmb LO. GSM system requirements are +22 dmb IP2, -10.5 dmb IP3. CDMA system requirements are +50 dmb IP2, +10 dmb IP3.

As described herein, embodiments of the invention can be implemented using MOSFETs (although the invention is not limited to this example). Thus, for purposes of analysis, it is assumed that an embodiment of the invention is implemented using one or more enhancement MOSFETs having the following parameter:

- a channel width (W) equal to 400 microns;
- a channel length (L) of 0.5 microns;
- a threshold voltage (V_t) equal to 2 volts; and
- a k value equal to 0.003 (W/L), or k equal to 0.24.

The drain current (I_D) for an N-Channel Enhancement MOSFET is given by the following 2nd order equation:

$$I_D(V_{GS}, V_{DS}) := \begin{cases} K \cdot [2 \cdot (V_{GS} - V_t) \cdot V_{DS} - V_{DS}^2] & \text{if } V_{DS} \leq V_{GS} - V_t \\ K \cdot (V_{GS} - V_t)^2 & \text{otherwise} \end{cases}$$

Note that since EQ. 42 is only a second order equation, we analyze second order distortion.

FIG. 42 is a plot of drain current (I_D) as a function of drain-source voltage (V_{DS}) for three different gate-source voltages (i.e., V_{GS} equal to 3V, 4V, and 5V). As evident from the I_D versus V_{DS} plot in FIG. 42, the larger the gate-source voltage is, the larger the linear region (larger "ohmic" or "triode" region) is for V_{DS} . The linear region is represented by the sloped lines (linear resistances) just to the left of the knee of the curves. The drain current distorts when V_{DS} starts swinging beyond the sloped line, into the knee of the curve.

46

FIG. 43 is a plot of the drain current of a typical FET as a function of drain-source voltage and gate-source voltage. It illustrates how linearity is improved by increasing the gate-source voltage. Of particular note, FIG. 43 shows that a FET becomes increasingly linear with increasing V_{GS} .

FIG. 43 shows how the drain current of a FET distorts when a sinusoid $V_{DS}(t)$ is applied across the drain and source junction. Therefore, biasing the FET with a larger V_{GS} improves linearity.

FIG. 44 illustrates what happens when, instead of having a large constant V_{GS} , V_{GS} is made to change proportionally to V_{DS} . In FIG. 44, three different constants of proportionality have been plotted to illustrate what happens to the linearity when V_{GS} is made to change proportionally to V_{DS} . Each of the curves is plotted with the same DC bias of 3 volts on V_{GS} . The first curve has a constant of proportionality of zero (i.e., no change of V_{GS} with V_{DS}).

As illustrated by the curves in FIG. 44, in embodiments, one can get an additional, significant linearity improvement over the large and constant V_{GS} case, if one makes V_{GS} change proportionally to V_{DS} . Furthermore, as shown in FIG. 44, there is an optimum constant of proportionality (i.e., 0.5) in embodiments of the invention.

FIGS. 45A-E are plots of the FFTs of the FET drain currents for different constants of proportionality (CPs). These plots illustrate how second order distortion is affected when using different constants of proportionality. The second order distortion in FIG. 45A (PC=0) is -12.041 dBc. The second order distortion in FIG. 45B (PC=0.25) is -18.062 dBc. The second order distortion in FIG. 45C (PC=0.5) is -318.443 dBc. The second order distortion in FIG. 45D (PC=0.75) is -18.062 dBc. The second order distortion in FIG. 45E (PC=1) is -12.041 dBc.

The plots in FIGS. 45A-E show that there is a significant linearity improvement by making V_{GS} change proportional to V_{DS} over the case where V_{GS} is constant. The optimum constant of proportionality is 0.5, or when V_{GS} is proportional to V_{DS} by a factor of 0.5. It can be shown that choosing constants of proportionality greater than 1 will make the FET linearity worse than having a constant V_{GS} (PC=0). FIGS. 45A-E

EQ. (42)

show, as expected, that the DC term increases as the second order distortion gets worse (i.e., second order distortion produces a DC term).

FIG. 46 shows two sets of curves. One set of curves is a plot of the FET drain current with a constant V_{GS} . The other set of curves is a plot of the FET drain current with a V_{GS} signal proportional to one half V_{DS} . The FET linearization effect can be seen in FIG. 46.

The FET linearization effect can also be seen mathematically by substituting $V_{GS} = V_{bias} + 0.5V_{DS}$ into the FET's drain current equation above to obtain:

$$I_D(V_{DS}) := \begin{cases} K \cdot [2 \cdot (V_{bias} + 0.5 \cdot V_{DS} - V_t) \cdot V_{DS} - V_{DS}^2] & \text{if } V_{DS} \leq V_{bias} + 0.5 \cdot V_{DS} - V_t \\ K \cdot (V_{bias} + 0.5 \cdot V_{DS} - V_t)^2 & \text{otherwise} \end{cases} \quad \text{EQ. (43)}$$

47

Simplifying this expression yields:

$$i_D(v_{DS}) := \begin{cases} [2 \cdot K \cdot (V_{bias} - V_t)] \cdot v_{DS} & \text{if } v_{DS} \leq 2 \cdot (V_{bias} - V_t) \\ 0.25 \cdot K \cdot [v_{DS} + 2 \cdot (V_{bias} - V_t)]^2 & \text{otherwise} \end{cases} \quad \text{EQ. (44)}$$

Thus, for v_{DS} less than or equal to $2(V_{bias}-V_t)$, the drain current is a linear function of v_{DS} with a slope of $2K(V_{bias}-V_t)$. In this region, making V_{GS} equal to half of V_{DS} , cancels the square term $(V_{DS})^2$, leaving only linear terms.

As described herein, embodiments of the invention (see, for example, the embodiments illustrated in FIGS. 18A and 19) exhibit enhanced linearity properties. The enhanced linearity properties are achieved where:

(1) $|V_{GS}| \geq 0.5 \cdot V_{dd}$ (i.e., the instantaneous differential voltage $|V_{GS}|$ is made as large as possible for both NMOS and PMOS devices, thus ensuring that voltage differential $|V_{GS}|$ does not swing below $(0.5 \cdot V_{dd})$),

(2) $|V_{GS}| = 0.5 \cdot V_{DS} + 0.5 \cdot V_{dd}$ (i.e., as the RF signal across the drain and source gets larger, the voltage differential $|V_{GS}|$ gets larger by a proportionality factor of 0.5—when the RF signal gets large and one needs more linearity, V_{GS} automatically increases to give more linearity), and/or

(3) The drain and source of the NMOS and PMOS devices swap every half RF cycle so that (1) and (2) above are always satisfied.

If an amplitude imbalance occurs, for example, across the FETS in FIG. 19, it will degrade the 2nd order linearity performance of receiver 1902. This is because the amplitude imbalance will change the constant of proportionality relating v_{GS} to v_{DS} from the optimum value of 0.5 to some other value. However, the only amplitude imbalance possible is at RF because the configuration of receiver 1902 guarantees that the baseband waveform will have perfect phase and amplitude balance.

In addition to the advantages already described herein, additional advantages of receiver 1902 include: lower LO to RF reradiation, lower DC offset, and lower current (only one switch). Furthermore, the architecture of receiver 1902 ensures that the baseband differential signals will be amplitude and phase balanced, regardless of the imbalance at the input of the circuit at RF. This is because when the FET switch

48

turns on, the two input capacitors are shorted together in series with a differential voltage across them. The capacitors have no ground reference and thus do not know there is an imbalance. As will be apparent to a person skilled in the relevant arts, the advantages to the configuration of receiver 1902 and UFD module 1938 are significant. In practice, the differential configuration of UFD 1938 has yielded high linearity that is repeatable.

In summary, to enhance the linearity of embodiments of the invention, one should:

(1) maintain the instantaneous voltage differential V_{GS} as large as possible for both the NMOS and PMOS devices; and/or

(2) make the voltage differential V_{GS} change proportional to V_{DS} so that $|V_{GS}| = V_{bias} + 0.5 \cdot |V_{DS}|$.

The enhanced linearity features described herein are also applicable to single-switch embodiments of the invention. Consider, for example, the embodiment shown in FIG. 20E. For this embodiment, V_{GS} increases with V_{DS} over half of an RF cycle. During the other half of the cycle V_{GS} is constant. During the half RF cycle that V_{GS} does increase with V_{DS} , it increases at the same rate as V_{DS} . The magnitude of V_{GS} is given by EQ. 45 and EQ. 46.

$$|V_{GS}| = |V_{DS}| + 0.5 \cdot V_{dd} \quad (\text{for negative half of RF cycle}) \quad \text{EQ. (45)}$$

$$|V_{GS}| = 0.5 \cdot V_{dd} \quad (\text{for positive half of RF cycle}) \quad \text{EQ. (46)}$$

FIGS. 47-53 further illustrate the enhanced linearity features of embodiments of the invention.

FIG. 47 shows additional plots that illustrate how the linearity of switching devices are enhanced, for example, by the architecture of FIG. 19. FIG. 19 shows the current of the switching device when used according to the architecture of a conventional receiver and the architecture of receiver 1902. As described herein, the current of a typical FET switching device is given by EQ. 47 below, and the current of the FET switching device when used according to the embodiment shown in FIG. 19 is given by EQ. 48.

$$i_d(v_{gs}, v_{ds}) := \begin{cases} K \cdot [2 \cdot (v_{gs} - v_t) \cdot v_{ds} - v_{ds}^2] & \text{if } v_{ds} \leq v_{gs} - v_t \\ K \cdot (v_{gs} - v_t)^2 & \text{otherwise} \end{cases} \quad \text{EQ. (47)}$$

$$i_{d1}(v_{gs}, v_{ds}) := \begin{cases} K \cdot [2 \cdot (v_{gs} + c \cdot v_{ds} - v_t) \cdot v_{ds} - v_{ds}^2] & \text{if } v_{ds} \leq (v_{gs} + c \cdot v_{ds} - v_t) \\ K \cdot (v_{gs} + c \cdot v_{ds} - v_t)^2 & \text{otherwise} \end{cases} \quad \text{EQ. (48)}$$

where $k=0.24$, $v_t=1.2$ volts, $c=0.5$, and $V_{ds}=0$ to 5 volts.

FIG. 47 illustrates the current of a typical FET switching device when used in a conventional receiver (i_d), when used in receiver 1902 (i_{d1}), and when used in receiver 2002 (i_{d2}). EQ. 49 describes the current in a typical FET switching device. EQ. 50 describes the current in a FET of receiver 1902. EQ. 51 describes the current in a FET of receiver 2002.

$$i_d(v_{gs}, v_{ds}, t) := \begin{cases} K \cdot [2 \cdot (v_{gs} - v_t) \cdot v_{ds}(t) - v_{ds}(t)^2] & \text{if } v_{ds}(t) \leq v_{gs} - v_t \\ K \cdot (v_{gs} - v_t)^2 & \text{otherwise} \end{cases} \quad \text{EQ. (49)}$$

$$i_{d2}(v_{gs}, v_{ds}, t) := \begin{cases} K \cdot [2 \cdot (v_{gs} + c \cdot v_{ds}(t) - v_t) \cdot v_{ds}(t) - v_{ds}(t)^2] & \text{if } v_{ds}(t) \leq (v_{gs} + c \cdot v_{ds}(t) - v_t) \\ K \cdot (v_{gs} + c \cdot v_{ds}(t) - v_t)^2 & \text{otherwise} \end{cases} \quad \text{EQ. (50)}$$

where $c = 0.5$

-continued

$$id1(vgs, vds, t) := \begin{cases} K \cdot [2 \cdot (vgs + c \cdot vds(t) - vt) \cdot vds(t) - vds(t)^2] & \text{if } vds(t) \leq (vgs + c \cdot vds(t) - vt) \\ [K \cdot (vgs + c \cdot vds(t) - vt)^2] & \text{otherwise} \end{cases} \quad \text{EQ. (51)}$$

where $c = 1.0$

FIG. 49 illustrates the voltage relationship between V_{gs} and the aperture voltage for receiver 1902.

FIGS. 50-53 illustrate the frequency spectrums for the currents of FIG. 48. FIGS. 50-53 are logarithmic plots. FIG. 50 is a combined plot of the frequency spectrum for all three of the current plots of FIG. 48. FIG. 51 is a plot of the frequency spectrum for the current of a FET switching device of receiver 1902. FIG. 52 is a plot of the frequency spectrum for the current of a FET switching device of receiver 2002. FIG. 53 is a plot of the frequency spectrum for the current of a FET switching device of receiver 2002. As can be seen in the plots, there is an absence of second order distortion for the FET switching device of receiver 1902.

As will be understood by a person skilled in the relevant arts, these plots herein demonstrate the enhanced linearity features of embodiments of the invention.

EXAMPLE METHOD EMBODIMENT OF THE INVENTION

FIG. 62 illustrates a flowchart of a method 6200 for down-converting an electromagnetic signal according to an embodiment of the present invention. This method can be implemented using any of the receiver and/or transceiver embodiments of the present invention described herein. Method 6200 is described with reference to the embodiment illustrated in FIG. 16O. As described below, method 6200 comprises five steps.

In step 6202, a RF information signal is received. The RF signal can be received by any known means, for example, using an antenna or a cable. In embodiments, the RF signal may be amplified using a low-noise amplifier and/or filtered after it is received. These steps, however, are not required in accordance with method 6200.

In step 6204, the received RF information signal is electrically coupled to a capacitor. For the receiver shown in FIG. 16O, the RF signal is electrically coupled to the carrier(+) port of receiver 1602 and capacitor 1604. When used herein, the phrase "A is electrically coupled to B" does not foreclose the possibility that there may be other components physically between A and B. For receiver 1602, the received RF signal is inverted (e.g., using an inverter as shown in FIG. 17), and the inverted RF signal is coupled to the carrier(-) port and capacitor 1606. In embodiments (e.g., 2001), there is no need to invert the received RF information signal. Thus, the step of inverting the received RF signal is not required in accordance with method 6200.

In accordance with method 6200, the RF information signal may also be electrically coupled to a capacitor using a switching device coupled to the capacitor. For example, for receiver 1688 shown in FIG. 16H, the received RF signal is coupled to capacitor 1604 through switching device 1608. Similarly, the inverted RF signal is coupled to capacitor 1606 through switching device 1610. Thus, as will be understood by a person skilled in the relevant arts, two or more devices can be electrically coupled yet not physically coupled.

In step 6206, a switching device, electrically coupled to the capacitor, is used to control a charging and discharging cycle of the capacitor. In FIG. 16O, switching device 1608 is used to control the charging and discharging of capacitor 1604. As

described above, when switching device 1608 is closed, the RF signal coupled to capacitor 1604 causes a charge to be stored on capacitor 1604. This charging cycle is control by the apertures of control signal 1646, as described herein. During a period of time that switching device 1608 is open (i.e., between the apertures of control signal 1646), a percentage of the total charge stored on capacitor 1604 is discharged. As described herein, capacitor 1604 is sized in accordance with embodiments of the invention to discharge between about six percent to about fifty percent of the total charge stored therein during a period of time that switching device 1608 is open (although other ranges apply to other embodiments of the invention). In a similar manner, switching device 1614 is used to control the charging and discharging of capacitor 1606 so that between about six percent to about fifty percent of the total charge stored therein is discharged during a period of time that switching device 1610 is open.

In step 6208, a plurality of charging and discharging cycles of the capacitor is performed in accordance with the techniques and features of the invention described herein, thereby forming a down-converted information signal. The number of charging and discharging cycles needed to down-convert a received information signal is dependent on the particular apparatus used and the RF signal received, as well as other factors. Method 6200 ends at step 6210 when the received RF information signal has been down-converted using the techniques and features of the invention described herein.

In embodiments of the invention, the down-converted signal has a carrier signal riding on top of the down-converted signal. Thus, as described herein, this carrier signal can be removed, for example, by filtering the down-converted signal or by amplifying the down-converted signal with a band-limited amplifier. For the embodiment of the invention shown in FIG. 16O, the carrier signal riding on the down-converted signal is removed using amplifiers 1620 and 1624. As will be understood by a person skilled in the relevant arts, amplifiers 1620 and 1624 are intended to operate on signals having a lower range of frequencies than carrier signals. Thus, amplifiers 1620 and 1624 act as filters to a carrier signal riding on top of a down converted signal. In embodiments of the invention, a low pass filter is used to remove the carrier signal as described herein, and as would be known to a person skilled in the relevant arts.

CONCLUSION

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. It will be apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

What is claimed is:

1. An apparatus for down-converting an electromagnetic signal, comprising:
 - a first and second capacitor each having a first and second port;

51

a first and second switching device each having a first, second, and third port; and
 a first and second impedance device each having a first and second port, wherein
 the second port of the first capacitor is electrically coupled to the second port of the first switching device and the second port of the first impedance device,
 the second port of the second capacitor is electrically coupled to the second port of the second switching device and the second port of the second impedance device, and
 the first port of the first switching device is electrically coupled to the first port of the second switching device and the first port of the first and second impedance devices, and wherein
 a first switching signal is applied to the third port of the first switching device, and
 a second switching signal is applied to the third port of the second switching device.

2. The apparatus of claim 1, wherein
 the first capacitor discharges between six percent to fifty percent of the total charge stored therein during a period of time that the first switching device is open, and
 the second capacitor discharges between six percent to fifty percent of the total charge stored therein during a period of time that the second switching device is open.

3. The apparatus of claim 1, wherein
 the first capacitor discharges between six percent to twenty-five percent of the total charge stored therein during a period of time that the first switching device is open, and
 the second capacitor discharges between six percent to twenty-five percent of the total charge stored therein during a period of time that the second switching device is open.

4. The apparatus of claim 1, wherein
 the first capacitor discharges between ten percent to twenty percent of the total charge stored therein during a period of time that the first switching device is open, and
 the second capacitor discharges between ten percent to twenty percent of the total charge stored therein during a period of time that the second switching device is open.

5. The apparatus of claim 1, wherein
 the first capacitor discharges between fifteen percent to twenty-five percent of the total charge stored therein during a period of time that the first switching device is open, and
 the second capacitor discharges between fifteen percent to twenty-five percent of the total charge stored therein during a period of time that the second switching device is open.

6. The apparatus of claim 1, wherein the first impedance device is an input impedance of a first amplifier and the second impedance device is an input impedance of a second amplifier.

7. The apparatus of claim 1, wherein the first and second switching devices are transistors.

8. The apparatus of claim 1, wherein the first and second switching devices are FETs.

9. The apparatus of claim 1, wherein the first and second switching devices are JFETs.

10. The apparatus of claim 1, wherein the first and second switching devices are MOSFETs.

11. The apparatus of claim 1, wherein the first port of the first switching device, the first port of the second switching device, and the first port of the first and second impedance device are each coupled to an AC ground.

52

12. The apparatus of claim 1, further comprising:
 a first low-pass filter having an input coupled to the second port of the first capacitor, the second port of the first switching device, and the second port of the first impedance device; and
 a second low-pass filter having an input coupled to the second port of the second capacitor, the second port of the second switching device, and the second port of the second impedance device;
 wherein the first and second low-pass filters remove a carrier signal from first and second down-converted signals, respectively.

13. The apparatus of claim 12, wherein the first and second low-pass filters are incorporated into first and second amplifiers, respectively.

14. The apparatus of claim 1, further comprising:
 a first aperture generator having an input coupled to a first clock signal; and
 a second aperture generator having an input coupled to a second clock signal;
 wherein the first and second aperture generators generate the first and second switching signals, respectively.

15. The apparatus of claim 14, wherein the second clock signal is approximately one hundred eighty degrees out of phase with respect to the first clock signal.

16. The apparatus of claim 1, wherein a period of the first switching signal includes at least one of a third or a fifth harmonic of an information signal, and wherein a period of the second switching signal includes at least one of a third or a fifth harmonic of an inverted information signal.

17. The apparatus of claim 1, wherein the first switching device is closed for approximately one-half of a cycle of an information signal per a period of the first switching signal, and wherein the second switching device is closed for approximately one-half of a cycle of an inverted information signal per a period of the second switching signal.

18. A method for down-converting an electromagnetic signal, comprising the steps of:
 (1) receiving an information signal;
 (2) inverting the information signal to generate an inverted information signal;
 (3) electrically coupling the information signal to a first capacitor and the inverted information signal to a second capacitor;
 (4) controlling a charging and discharging cycle of the first and second capacitors with first and second switching devices electrically coupled to the first and second capacitors, respectively; and
 (5) performing a plurality of charging and discharging cycles of the first and second capacitors to generate first and second down-converted information signals across first and second impedance devices, respectively;
 wherein the information signal is used to store a charge on the first capacitor when the first switching device is closed and the inverted information signal is used to store a charge on the second capacitor when the second switching device is closed.

19. The method of claim 18, wherein the first capacitor discharges between six percent to fifty percent of the total charge stored therein during a period of time that the first switching device is open, and wherein the second capacitor discharges between six percent to fifty percent of the total charge stored therein during a period of time that the second switching device is open.

20. The method of claim 18, wherein the first capacitor discharges between ten percent to twenty-five percent of the total charge stored therein during a period of time that the first

53

switching device is open, and wherein the second capacitor discharges between ten percent to twenty-five percent of the total charge stored therein during a period of time that the second switching device is open.

21. The method of claim **18**, wherein the first capacitor discharges between fifteen percent to thirty percent of the total charge stored therein during a period of time that the first switching device is open, and wherein the second capacitor discharges between fifteen percent to thirty percent of the

54

total charge stored therein during a period of time that the second switching device is open.

22. The method of claim **18**, further comprising the step of: amplifying the first and second down-converted information signals.

23. The method of claim **18**, further comprising the step of: removing a carrier signal from the first and second down-converted information signals.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,496,342 B2
APPLICATION NO. : 10/972133
DATED : February 24, 2009
INVENTOR(S) : Sorrells et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page

Title Page, Item (73), Assignee, please remove, "Parkervision, Inc." and replace with --ParkerVision, Inc.--.


Title Page, Item (*), Notice, please add "This patent is subject to a Terminal Disclaimer."

Column 17

Column 17, Line 63, please remove, "having two" and replace with --Having Two--.

Signed and Sealed this

Eighth Day of September, 2009

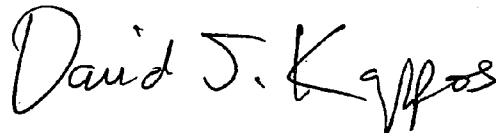A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive, flowing style.

David J. Kappos
Director of the United States Patent and Trademark Office