DECLARATION OF JUNE ANN MUNFORD

1. My name is June Ann Munford. I am over the age of 18, have personal knowledge of the facts set forth herein, and am competent to testify to the same.

2. I earned a Master of Library and Information Science (MLIS) from the University of Wisconsin-Milwaukee in 2009. I have over ten years of experience in the library/information science field. Beginning in 2004, I have served in various positions in the public library sector including Assistant Librarian, Youth Services Librarian and Library Director. I have attached my Curriculum Vitae as Appendix CV.

3. During my career in the library profession, I have been responsible for materials acquisition for multiple libraries. In that position, I have cataloged, purchased and processed incoming library works. That includes purchasing materials directly from vendors, recording publishing data from the material in question, creating detailed material records for library catalogs and physically preparing that material for circulation. In addition to my experience in acquisitions, I was also responsible for analyzing large collections of library materials, tailoring library records for optimal catalog

search performance and creating lending agreements between libraries during my time as a Library Director.

4. I am fully familiar with the catalog record creation process in the library sector. In preparing a material for public availability, a library catalog record describing that material would be created. These records are typically written in Machine Readable Catalog (herein referred to as "MARC") code and contain information such as a physical description of the material, metadata from the material's publisher, and date of library acquisition. In particular, the 008 field of the MARC record is reserved for denoting the date of creation of the library record itself. As this typically occurs during the process of preparing materials for public access, it is my experience that an item's MARC record indicates the date of an item's public availability.

5. Typically, in creating a MARC record, a librarian would gather various bits of metadata such as book title, publisher and subject headings among others and assign each value to a relevant numerical field. For example, a book's physical description is tracked in field 300 while title/attribution is tracked in field 245. The 008 field of the MARC record is reserved for denoting the creation of the library record itself. As this is the only date reflecting the inclusion of said materials within the library's collection, it is my experience

that an item's 008 field accurately indicates the date of an item's public availability.

6. I have reviewed Exhibit DISH-1005, *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method* by The Institute of Electrical and Electronics Engineers (IEEE).

7. Attached hereto as Appendix IEEE02 is a true and correct copy of the MARC record for *IEEE Standards* as held by the Notre Dame University library. I secured this record myself from the library's public catalog. The MARC record contained within Appendix IEEE02 accurately describes the title, author and publisher.

8. Attached hereto as Appendix IEEE01 is a PDF version of *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method*. I secured this copy myself from the IEEE website at https://www.ieee802.org/21/doctree/2006_Meeting_Docs/2006-11_meeting_docs/802.3ah-2004.pdf. In comparing Appendix IEEE01 to Exhibit DISH-1005, it is my determination that Exhibit DISH-1005 is a true

and correct copy of *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method*.

9. The 008 field of the MARC record in Appendix IEEE02 indicates the date of record creation. The 008 field of Appendix IEEE02 indicates the Notre Dame University library first subscribed to this online service as of October 27, 2005 and still offers public access to this resource. The 506 field of Appendix IEEE02 indicates Penn State's copy of *IEEE Standards* is subscription-only service.

10. I am familiar with the Internet Archive, a digital library formally certified by the State of California as a public library. Among other services that the Internet Archive makes available to the general public is the Wayback Machine, an online archive. The Internet Archive's Wayback Machine service archives webpages as of a certain capture date to track changes in the web over time. The Internet Archive has been in operation as a nonprofit library since 1996 and has hosted the Wayback Machine service since its inception in 2001. During my time as a librarian, I frequently used the Internet Archive's Wayback Machine for research and instruction purposes. This includes teaching instructional classes on using the Wayback Machine

to library patrons and using the Wayback Machine to research reference inquiries that require hard-to-find online resources. I consider the Internet Archive's recordskeeping to be as rigorous and detailed as other formal library recordskeeping practices such as MARC records, OCLC records and Dublin Core.

11. Attached hereto as Appendix IEEE03 is a screen capture of the Internet Archive Wayback Machine entry for http://standards.ieee.org/db/status/status.txt. I secured these screen captures myself from https://web.archive.org/web/20040701000000*/http://standards.ieee.org/db/status/status.txt.

12. Appendix IEEE03 contains excerpts from a document entitled "Products and Projects Status Report Thu Aug 12 10:57:31 EDT 2004" found on the IEEE website. This Internet Archive record was captured as of August 13, 2004. Page 4 of Appendix IEEE03 contains the status report for *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method.* The documents includes entries confirming the full publication of the standard, lists a phone number and

email to facilitate purchase of this standard and confirms that the standard was approved as of June 24, 2004.

13. Attached hereto as Appendix IEEE04 is a screen capture of the Internet Archive Wayback Machine entry for http://standards.ieee.org/catalog/sol/index.html. I secured these screen captures myself from http://web.archive.org/web/20041001000000*/http://standards.ieee.org/catalog/sol/index.html.

14. Appendix IEEE04 is a web page entitled "Web Delivery of Individual IEEE Standards" as found on the IEEE website. This Internet Archive record was captured as of October 25, 2004. This web page described multiple methods in which an interested member of the public could purchase individual standards such as *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method.* Page 4 of Appendix IEEE04 also describes the benefits of IEEE's online subscription service, presumably the same online service represented in the Notre Dame University's library catalog as seen in Appendix IEEE02. Features of this online subscription service include "…repeated access to

IEEE standards 365 days a year, 24x7" and "…no additional cost throughout the year as new standards are added to your subscription."

15. Attached hereto as Appendix IEEE05 is a screen capture of the Internet Archive Wayback Machine entry for http://standards.ieee.org/catalog/olis/product_tip.html. I secured these screen captures myself from http://web.archive.org/web/20041027191942/http://standards.ieee.org/catalog/olis/product_tip.html.

16. Appendix IEEE05 is a web page entitled "IEEE Standards Online Product Tip" as found on the IEEE website. This Internet Archive record was captured as of October 27, 2004. Appendix IEEE05 further describes the details of the Standards Online subscription as discussed with Appendices IEEE01 and IEEE04. Page 3 of Appendix IEEE05 indicates subscribers have access to standards as soon as they are available and also indicates that the subscription includes all IEE 802 standards, such as *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method*.

17. Appendix IEEE02 indicates the Notre Dame University library first acquired their IEEE Standards subscription service as of October 27, 2005 and still maintains that subscription. Appendix IEEE03 indicates *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method* was first approved as of June 24, 2004 and was available for purchase as of August 13, 2004. Appendix IEEE04 indicates that interested members of the public could purchase individual IEEE Standards such as *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method* or access all IEEE standards via subscription as of October 25, 2004. Appendix IEEE05 indicates IEEE Online Standards subscribers have access to standards as soon as they are available and also indicates that the subscription includes all IEE 802 standards. As such, it is my determination that *IEEE Standard 802.3ah-2004: Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method* was first made available to the public via the IEEE as of August 13, 2004 and certainly no later than October 27, 2005 via the Notre Dame University library.

18. I have reviewed Exhibit DISH-1008, "MoCA: Ubiquitous Multimedia Networking in the Home" by Schlomo Ovadia as published in *Broadband Access Communication Technologies II*.

19. Attached hereto as Appendix OVADIA01 is a true and correct copy of the MARC record for *Broadband Access Communication Technologies II* as held by the Penn State University library. I secured this record myself from the library's public catalog. The MARC record contained within Appendix OVADIA01 accurately describes the title, author, publisher, and ISBN number of *Broadband Access Communication Technologies II.*

20. Attached hereto as Appendix OVADIA02 is a true and correct copy of "MoCA: Ubiquitous Multimedia Networking in the Home" as published in *Broadband Access Communication Technologies II* as held by the Penn State University library. I secured this PDF copy myself from the library's collection. In comparing Exhibit DISH-1008 to Appendix OVADIA02, it is my determination that Exhibit DISH-1008 is a true and correct copy of *Broadband Access Communication Technologies II* by Shlomo Ovadia.

21. The 008 field of the MARC record in Appendix OVADIA01 indicates the date of record creation. The 008 field of Appendix OVADIA01 indicates the

Penn State University library first acquired these proceedings as of November 5, 2007. Considering this information, it is my determination that *Broadband Access Communication Technologies II* and therefore "MoCA: Ubiquitous Multimedia Networking in the Home" was made available to the public shortly after its initial acquisition as of November 5, 2007.

22. Appendix OVADIA01 includes a record of publication from the SPIE, the publisher of *Broadband Access Communication Technologies II* and therefore "MoCA: Ubiquitous Multimedia Networking in the Home". These SPIE records are attached to the library catalog record when accessing *SPIE* resources on-campus. Page 3 of Appendix OVADIA01 is an SPIE record *Broadband Access Communication Technologies II*. This record indicates that *Broadband Access Communication Technologies II* is a conference proceeding for a conference known as Optics East which was held from September 9 – 12, 2007. Page 5 of Appendix OVADIA01 is an entry for "MoCA: Ubiquitous Multimedia Networking in the Home" on the table of contents as included in *Broadband Access Communication Technologies II*, indicating that this paper was presented at the Optics East conference held from September 9 – 12, 2007. Page 8 of Appendix OVADIA01 is an SPIE record for "MoCA: Ubiquitous Multimedia Networking in the Home",

indicating the paper was published as of September 10, 2007 and presented at the Optics East 2007 conference.

23. Attached hereto as Appendix OVADIA03 is a screen capture of the Internet Archive Wayback Machine entry for http://spie.org/x6084.xml. I secured these screen captures myself from http://web.archive.org/web/20070501000000*/http://spie.org/x6084.xml.

24. Appendix OVADIA03 is a web page entitled "SPIE Optics East" hosted on the SPIE website. This web page was captured by the Internet Archive as of October 17, 2007. Appendix OVADIA03 verifies the date of the SPIE Optics East conference as taking place between September 9 -12, 2007 and verifies that the Broadband Access Communication Technologies II subconference was held as a part of the larger Optics East 2007 conference. Based upon this Internet Archive record, information describing this conference was published online by the SPIE weeks after the conference took place in 2007. By reviewing this page and other piece of related conference material, an interested member of the public would be able to associate the Optics East conference with subjects such as "broadband communications", "nanophotonics", "optical transmission systems",

"nanomaterials", “fiber optics”, “infrared technologies” and “environmental monitoring” among others.

25. Attached hereto as Appendix OVADIA04 is a screen capture of the Internet Archive Wayback Machine entry for http://spie.org/x1848.xml. I secured these screen captures myself from http://web.archive.org/web/20070301000000*/http://spie.org/x1848.xml.

26. Appendix OVADIA04 is a web page entitled “SPIE Conference Proceedings” hosted on the SPIE website. This web page was captured by the Internet Archive as of October 16, 2007. In regards to the publication schedule of conference proceedings, Appendix OVADIA04 includes the following passage: “Original research papers presented at SPIE conference are available online in the SPIE digital library within two to four weeks after the even, with print volumes and CD-ROM collections available a few weeks later. This eFirst publication model gets the author’s work out to the community faster, and provides researchers all over the world with immediate access on publication.” This passage indicates the SPIE has created an institutional policy prioritizing time-sensitive access to conference publications, such as the proceedings of *Broadband Access Communication Technologies II*.

27. Attached hereto as Appendix OVADIA05 is a screen capture of the Internet Archive Wayback Machine entry for http://spie.org/x2836.xml. I secured these screen captures myself from https://web.archive.org/web/20070701000000*/http://spie.org/x2836.xml.

28. Appendix OVADIA05 is a web page entitled "SPIE Digital Library" hosted on the SPIE website. This web page was captured by the Internet Archive as of June 26, 2007. Appendix OVADIA05 the methods that interested member of the public could employ to gain access to SPIE conference publications such as the proceedings of *Broadband Access Communication Technologies II*. The page describes a subscription service granting access to SPIE proceedings and also contains a passage describing how users can purchase individual conference proceedings: "You may browse an buy papers from the SPIE Digital Library for a per-paper fee of only $18 USD for Conference Proceedings…".

29. Appendix OVADIA01 indicates "MoCA: Ubiquitous Multimedia Networking in the Home" was published as of September 10, 2007 in the conference proceedings of *Broadband Access Communication Technologies II*, a conference held during at the broader Optics East 2007 conference.

Appendix OVADIA03 indicates that the conference organizers of Optics East 2007 were interested in advertising these conference proceedings for further access as of October 10, 2007. Appendix OVADIA04 indicates that the SPIE's institutional policy is to expediate the publication of conference proceedings within two to four weeks of the conference taking place. Finally, Appendix OVADIA05 indicates any interested member of the public in June 2007 could purchase conference proceedings such as *Broadband Access Communication Technologies II* from the SPIE for a one-time fee. Considering this information, it is my determination that "MoCA: Ubiquitous Multimedia Networking in the Home" was first published as of September 10, 2007 as part of the Optics East 2007 conference. It is also my determination that the conference proceedings containing "MoCA: Ubiquitous Multimedia Networking in the Home" were again published no more than four weeks after the September 2007 conference taking place (i.e., no later than October 10, 2007). This is in addition to being made further available to the public certainly no later than November 5 based upon the acquisition date found in Appendix OVADIA01.

30. I have been retained on behalf of the Petitioner to provide assistance in the above-illustrated matter in establishing the authenticity and public

availability of the documents discussed in this declaration. I am being compensated for my services in this matter at the rate of $200.00 per hour plus reasonable expenses. My statements are objective, and my compensation does not depend on the outcome of this matter.

31. I declare under penalty of perjury that the foregoing is true and correct. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code.

Dated: 2/9/2024



June Ann Munford

Appendix CV

June A. Munford
Curriculum Vitae

Education

University of Wisconsin-Milwaukee - MS, Library & Information Science, 2009
Milwaukee, WI

- Coursework included cataloging, metadata, data analysis, library systems, management strategies and collection development.
- Specialized in library advocacy, cataloging and public administration.

Grand Valley State University - BA, English Language & Literature, 2008
Allendale, MI

- Coursework included linguistics, documentation and literary analysis.
- Minor in political science with a focus in local-level economics and government.

Professional Experience

Researcher / Expert Witness, October 2017 – present
Freelance ● Pittsburgh, Pennsylvania & Grand Rapids, Michigan

- Material authentication and public accessibility determination. Declarations of authenticity and/or public accessibility provided upon research completion. Experienced with appeals and deposition process.

- Research provided on topics of public library operations, material publication history, digital database services and legacy web resources.

- Past clients include Alston & Bird, Arnold & Porter, Baker Botts, Fish & Richardson, Erise IP, Irell & Manella, O'Melveny & Myers, Perkins-Coie, Pillsbury Winthrop Shaw Pittman and Slayden Grubert Beard.

Library Director, February 2013 - March 2015
Dowagiac District Library ● Dowagiac, Michigan

- Executive administrator of the Dowagiac District Library. Located in

Southwest Michigan, this library has a service area of 13,000, an annual operating budget of over $400,000 and total assets of approximately $1,300,000.

● Developed careful budgeting guidelines to produce a 15% surplus during the 2013-2014 & 2014-2015 fiscal years while being audited.

● Using this budget surplus, oversaw significant library investments including the purchase of property for a future building site, demolition of existing buildings and building renovation projects on the current facility.

● Led the organization and digitization of the library's archival records.

● Served as the public representative for the library, developing business relationships with local school, museum and tribal government entities.

● Developed an objective-based analysis system for measuring library services - including a full collection analysis of the library's 50,000+ circulating items and their records.

November 2010 - January 2013
Librarian & Branch Manager, Anchorage Public Library ● Anchorage, Alaska

● Headed the 2013 Anchorage Reads community reading campaign including event planning, staging public performances and creating marketing materials for mass distribution.

● Co-led the social media department of the library's marketing team, drafting social media guidelines, creating original content and instituting long-term planning via content calendars.

● Developed business relationships with The Boys & Girls Club, Anchorage School District and the US Army to establish summer reading programs for children.

June 2004 - September 2005, September 2006 - October 2013
Library Assistant, Hart Area Public Library
Hart, MI

● Responsible for verifying imported MARC records and original MARC

cataloging for the local-level collection as well as the Michigan Electronic Library.

● Handled OCLC Worldcat interlibrary loan requests & fulfillment via ongoing communication with lending libraries.

Professional Involvement

Alaska Library Association - Anchorage Chapter
- Treasurer, 2012

Library Of Michigan
- Level VII Certification, 2008
- Level II Certification, 2013

Michigan Library Association Annual Conference 2014
- New Directors Conference Panel Member

Southwest Michigan Library Cooperative
- Represented the Dowagiac District Library, 2013-2015

Professional Development

Library Of Michigan Beginning Workshop, May 2008
Petoskey, MI
- Received training in cataloging, local history, collection management, children's literacy and reference service.

Public Library Association Intensive Library Management Training, October 2011
Nashville, TN
- Attended a five-day workshop focused on strategic planning, staff management, statistical analysis, collections and cataloging theory.

Alaska Library Association Annual Conference 2012 - Fairbanks, February 2012
Fairbanks, AK
- Attended seminars on EBSCO advanced search methods, budgeting, cataloging, database usage and marketing.

Depositions

2019 ● Fish & Richardson

Apple v. Qualcomm (IPR2018-001281, 39521-00421IP, IPR2018-01282 and 39521-00421IP2)

2019 ● Erise IP

Implicit, LLC v. Netscout Systems, Inc (Civil Action No. 2:18-cv-53-JRG)

2019 ● Perkins-Coie

Adobe Inc. v. RAH Color Technologies LLC (Cases IPR2019-00627, IPR2019-00628, IPR2019-00629 and IPR2019-00646)

2020 ● O'Melveny & Myers

Maxell, Ltd. v. Apple Inc. (Case No. 5:19-cv-00036-RWS)

2021 ● Pillsbury Winthrop Shaw Pittman LLP

Intel v. SRC (IPR2020-1449)

2022 ● Perkins-Coie

Realtek v. Future Link (IPR2021-01182)

2023 ● Fish & Richardson

Neuroderm Ltd. v. Abbvie, Inc (Case No. PGR2022-00040)

2023 ● Fish & Richardson

Nearmap US Inc. v. Pictometry International Corp. (IPR2022-00735)

2023 ● Fish & Richardson

Samsung Electronics v. MemoryWeb LLC (Case No. 39843-0136PS1)

2023 ● Pillsbury Winthrop Shaw Whitman LLP

Gravel Rating Systems v. Costco Wholesale Corp. (Civil Action No. 4:21-cv-149-ALM)

Limited Case and Clientele History

Alston & Bird

- Ericsson

  v. Collision Communications (IPR2022-01233)

- Nokia

  v. Neptune Subsea, Xtera (Case No. 1:17-cv-01876)

- Universal Electronics Inc

  v. Roku Inc (IPR2022-00818)

Arnold & Porter

- Ivantis

  v. Glaukos (Case No. 8:18-cv-00620)

- Samsung

  v. Jawbone (Case No. 2:21-cv-00186)

Benesch Friedlander Coplan & Aronoff

- Voyis

  v. Cathx (Case No. 5:21-cv-00077-RWS)

Erise I.P.

- Apple
  - v. Ericsson Inc. (IPR2022-00715)
  - v. Future Link Systems (IPRs 6317804, 6622108, 6807505, and 7917680)
  - v. INVT (Case No. 20-1881)
  - v. Navblazer LLC (IPR2020-01253)
  - v. Qualcomm (IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)
  - v. Quest Nettech Corp (Case No. 2:19-cv-00118-JRG)
  - v. Telefonaktiebolaget LM Ericsson (IPR2022-00275)
- Fanduel
  - v. CGT (Case No. 19-1393)
- Garmin
  - v. Phillips North America LLC (Case No. 2:19-cv-6301-AB-KS)
- Netscout
  - v. Longhorn HD LLC (Case No. 2:20-cv-00349)
  - v. Implicit, LLC (Civil Action No. 2:18-cv-53-JRG)
- Sony Interactive Entertainment LLC
  - v. Bot M8 LLC (IPR2020-01288)
  - v. Infernal Technology LLC (Case No. 2:19-CV-00248-JRG)
- Unified Patents

v. GE Video Compression (Civil Action No. 2:19-cv-248)

Fish & Richardson

- Apple

  v. AliveCor (3:21-cv-03958)

  v. LBS Innovations (Case No. 2:19-cv-00119-JRG-RSP)

  v. Koss Corporation (IPR2021-00305)

  v. Masimo (IPR 50095-0012IP1, 50095-0012IP2, 50095-0013IP1, 50095-0013IP2, 50095-0006IP1, 50095-0135IP1)

  v. Neonode (Case No. 21-cv-08872-EMC)

  v. Qualcomm (IPR2018-001281, 39521-00421IP, IPR2018-01282, 39521-00421IP2)

- Dell

  v. Neo Wireless (IPR2022-00616)

- Dish Network

  v. Entropic Communications, LLC (Case No. 2:2023-CV-01043)

  v. Realtime Adaptive Streaming (Case No. 1:17-CV-02097-RBJ)

  v. TQ Delta LLC (Case No. 18-1798)

- Evapco Dry Cooling

  v. SPG Dry Cooling (IPR2021-00688)

- Genetec

  v. Sensormatic Electronics (Case No. 1:20-CV-00760)

- Huawei

v. Bell Northern Research LLC (IPR2019-01174)

- Kianxis

  v. Blue Yonder (Case No. 3:20-cv-03636)

- LG Electronics

  v. Bell Northern Research LLC (Case No. 3:18-cv-2864-CAB-BLM)

- Metaswitch

  v. Sonus Networks (IPR2018-01719)

- Microsoft

  v. Throughputer Inc (IPR2022-00757)

- Mom Enterprises

  v. Ddrops Company (Case No. 1:22-cv-00332)

- MLC Intellectual Property

  v. MicronTech (Case No. 3:14-cv-03657-SI)

- Nearmap Inc

  v. EagleView Technologies (IPR2022-01009)

- Neuroderm Ltd.

  v. Abbvie, Inc (Case No. PGR2022-00040)

- Realtek Semiconductor

v. Future Link (IPR2021-01182)

- Quectel
  - v. Koninklijke Philips (Case No. 1:20-cv-01710)

- Samsung
  - v. Aire Technology (IPR2022-00877)
  - v. Bell Northern Research (Case No. 2:19-cv-00286-JRG)
  - v. Communication Technologies Inc (IPR2022-01221)
  - v. Jawbone Innovations (IPR2022-00865)
  - v. MemoryWeb LLC (IPR2022-00885)
  - v. Dodots Licensing Solutions (IPR2023-00701)
  - v. Telefonaktiebolaget LM Ericsson (IPR2021-00615)

- Texas Instruments
  - v. Vantage Micro LLC (IPR2020-01261)

- Xilinx
  - v. Sentient Sensors LCC (Case No. 1:22-cv-00173)

Irell & Manella

- Curium

O'Melveny & Myers

- Apple
  - v. Maxell (Case No. 5:19-cv-00036-RWS)

- Micron Technology Inc.

  v. Besang Inc (IPR2023-00900)

- Samsung

  v. Daedalus Prime LLC (1335 Investigation)

Perkins-Coie

- Heru Industries

  v. The UAB Research Foundation (IPR2022-01148)

- Intel Corporation

  v. BitMICRO (Case No. 5:23-cv-00625)

- Realtek Semiconductor

  v. Future Link (IPR2021-01182)

- Twitter Inc

  v. VOIP-Pal.com (Case No. 3:20-cv-02397-JD)

- TCL Industries

  v. Koninklijke Philips NV (IPR2021-00495, IPR2021-00496 and IPR2021-00497)

Pillsbury Winthrop Shaw Pittman

- Intel

  v. FG SRC LLC (Case No. 6:20-cv-00315)

- Gravel Rating Systems

v. Costco (Case No. 4:21-cv-149)
v. Lowe's Home Centers (Case No. 4:21-cv-150)
v. T-Mobile USA (Case No. 4:21-cv-152)
v. Kohl's Inc. (Case No. 4:21-cv-258)
v. Under Armor (Case No. 4:21-cv-356)

Quinn Emanuel

- Wolfspeed

  v. The Trustees of Purdue University (Case No. 1:2021-cv-00840)

Stern, Kessler, Goldstein & Fox

- Preliminary Research

Sheppard, Mullin, Richter & Hampton LLP

- Cadence Design Systems Inc.

  v. Semiconductor Design Technologies (Case No. 3:23-cv-01001)

Appendix IEEE01

IEEE Standards

IEEE Std 802.3ah™-2004
(Amendment to IEEE Std 802.3™-2002
as amended by
IEEE Stds 802.3ae™-2002, 802.3af™-2002,
802.3aj™-2003 and 802.3ak™-2004)

802.3ah™

IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements

Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications

Amendment: Media Access Control Parameters, Physical Layers, and Management Parameters for Subscriber Access Networks

IEEE Computer Society

Sponsored by the
LAN/MAN Standards Committee

IEEE

3 Park Avenue, New York, NY 10016-5997, USA

7 September 2004

Print: SH95249
PDF: SS95249

DirecTV Exhibit 1010, Page 30 of 717

IEEE Std 802.3ah™-2004
(Amendment to IEEE Std 802.3™-2002
as amended by
IEEE Stds 802.3ae™-2002, 802.3af™-2002,
802.3aj™-2003, and 802.3ak™-2004)

**IEEE Standard for Information technology—
Telecommunications and information exchange between systems—
Local and metropolitan area networks—
Specific requirements—**

Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications

Amendment: Media Access Control Parameters, Physical Layers, and Management Parameters for Subscriber Access Networks

Sponsor

LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 24 June 2004

IEEE-SA Standards Board

Abstract: This amendment to IEEE Std 802.3-2002 as amended by IEEE Std 802.3ae-2002, IEEE Std 802.3af-2003, IEEE Std 802.3aj-2003, and IEEE Std 802.3ak-2004 combines a minimal set of extensions to the IEEE 802.3 Media Access Control (MAC) and MAC Control sublayers with a family of Physical (PHY) Layers. These Physical Layers include optical fiber and voice grade copper cable Physical Medium Dependent sublayers (PMDs) for point-to-point connections in subscriber access networks. This amendment also introduces the concept of Ethernet Passive Optical Networks (EPONs), in which a point to multi-point (P2MP) network topology is implemented with passive optical splitters, along with optical fiber PMDs that support this topology. In addition, a mechanism for network Operations, Administration and Maintenance (OAM) is included to facilitate network operation and troubleshooting. To support these innovations, options for unidirectional transmission of frames are provided for 100BASE-X, 1000BASE-X, 10GBASE-R, 10GBASE-W, and 10GBASE-X.

Keywords: Ethernet in the First Mile, EFM, Ethernet Passive Optical Network, EPON, Ethernet over DSL, Multi-point MAC Control, MPMC, Operations, Administration, Maintenance, OAM, full duplex MAC, P2MP, P2P, 100BASE-LX10, 100BASE-BX10, 1000BASE-LX10, 1000BASE-BX10, 1000BASE-PX10, 1000BASE-PX20, 10PASS-TS, 2BASE-TL, last mile

---

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2004 by the Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 7 September 2004. Printed in the United States of America.

IEEE is a registered trademark in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 0-7381-4075-9 SH95249
PDF: ISBN 0-7381-4076-7 SS95249

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied "**AS IS**."

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position, explanation, or interpretation of the IEEE.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board

445 Hoes Lane

P.O. Box 1331

Piscataway, NJ 08855-1331USA

NOTE—Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Introduction

(This introduction is not part of IEEE Std 802.3ah-2004, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements— CSMA/CD Access Method and Physical Layer Specifications Amendment: Media Access Control Parameters, Physical Layers, and Management Parameters for Subscriber Access Networks).

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE 802.3ae). A historical listing of all projects that have added to or modified IEEE Std 802.3 follows as a part of this introductory material. The listing is in chronological order of project initiation and for each project describes: subject, clauses added (if any), approval dates, and committee officers.

The media access control (MAC) protocol specified in IEEE Std 802.3 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was included in the experimental Ethernet developed at Xerox Palo Alto Research Center. While the experimental Ethernet had a 2.94 Mb/s data rate, IEEE Std 802.3-1985 specified operation at 10 Mb/s. Since 1985 new media options, new speeds of operation, and new protocol capabilities have been added to IEEE Std 802.3.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3x™ specified full duplex operation and a flow control protocol, IEEE Std 802.3z™ added 1000 Mb/s operation (also called Gigabit Ethernet) and IEEE Std 802.3ad™ specified link aggregation. These major additions are all now included in IEEE Std 802.3-2002 and are not available as separate documents.

Recent additions such as IEEE Std 802.3ae (also called 10 Gigabit Ethernet) and IEEE Std 802.3af (also called Power over Ethernet) are currently published as separate documents. These recent amendments are part of IEEE Std 802.3 and they are dependent on and reference information published in IEEE Std 802.3-2002.

At the date of IEEE Std 802.3ah publication, IEEE Std 802.3 is comprised of the following documents:

IEEE Std 802.3-2002

Section One—Includes Clause 1 through Clause 20 and Annexes A through H. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 32 and Annexes 22A through 32A. Section Two includes the specifications for 100 Mb/s operation and management attributes for multiple protocols and operational speeds.

Section Three—Includes Clause 34 through Clause 43 and Annexes 36A through 43C. Section Three includes the specifications for 1000 Mb/s operation.

IEEE Std 802.3ae-2002

Includes changes to IEEE Std 802.3-2002, and adds Clause 44 through Clause 53 and Annexes 44A through 50A. This amendment includes specifications for 10 Gb/s operation.

IEEE Std 802.3af-2003

Includes changes to IEEE Std 802.3-2002, and adds Clause 33 and Annexes 33A through 33E. This amendment includes specifications for the provision of power over 10BASE-T, 100BASE-TX, and 1000BASE-T cabling.

Copyright © 2004 IEEE. All rights reserved.

IEEE Std 802.3aj-2003
Includes changes to IEEE Std 802.3-2002 and IEEE Std 802.3ae-2002.

IEEE Std 802.3ak-2004
Includes changes to IEEE Std 802.3-2002, and IEEE Std 802.3ae-2002, and adds Clause 54. This amendment adds 10GBASE-CX4 specifications for 10 Gb/s operation over balanced shielded cabling.

IEEE Std 802.3ah-2004
Includes changes to IEEE Std 802.3-2002, IEEE Std 802.3ae-2002, and IEEE Std 802.3af-2003, and adds Clause 56 through Clause 67 and Annex 58A through Annex 67A. This amendment defines services and protocol elements that permit the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network.

IEEE Std 802.3 will continue to evolve. Revisions are anticipated to the above standards within the next few years to integrate approved changes into IEEE Std 802.3, to clarify existing material, to correct possible errors, and to incorporate new related material.

Conformance test methodology

An additional standard, IEEE Std 1802.3™-2001, provides conformance test information for 10BASE-T.

IEEE Std 802.3ah-2004

IEEE Std 802.3ah-2004, Ethernet in the First Mile is an amendment to IEEE Std 802.3. The standard includes changes to IEEE Std 802.3, and these changes are marked in comparison to the last published standard. In some cases, text included in IEEE Std 802.3-2002 has been modified by IEEE Std 802.3ae-2002, IEEE Std 802.3af-2003, then IEEE Std 802.3aj-2003 and again by IEEE Std 802.3ah-2004.

This document defines services and protocol elements that permit the exchange IEEE Std 802.3 format frames between stations in a subscriber access network.

Copyright © 2004 IEEE. All rights reserved.

Notice to users

Errata

Errata, if any, for this and all other standards can be accessed at the following URL: http://standards.ieee.org/reading/ieee/updates/errata/index.html. Users are encouraged to check this URL for errata periodically.

Interpretations

Current interpretations can be accessed at the following URL: http://standards.ieee.org/reading/ieee.interp/index.html.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents or patent applications for which a license may be required to implement an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention. A patent holder or patent applicant has filed a statement of assurance that it will grant licenses under these rights without compensation or under reasonable rates and nondiscriminatory, reasonable terms and conditions to applicants desiring to obtain such licenses. The IEEE makes no representation as to the reasonableness of rates, terms, and conditions of the license agreements offered by patent holders or patent applicants. Further information may be obtained from the IEEE Standards Department.

Participants

The following is a list of voting members when the IEEE 802.3 Working Group balloted this standard.

Robert M. Grow, *Chair*
David Law, *Vice-Chair*
Steve Carlson, *Secretary*
Howard Frazier, *Chair, EFM Task Force*
Wael William Diab, *Editor-in-Chief, EFM Task Force*
Hugh Barrass, *Vice-Chair, EFM Task Force*
Scott Simon, *Recording Secretary, EFM Task Force*
Behrooz Rezvani, *Executive Secretary, EFM Task Force*
Vipul Bhatt, *Chair, EFM Optics Sub Task Force*
Piers Dawe, *Vice-Chair, EFM Optics Sub Task Force*
Barry O'Mahony, *Chair, EFM Copper Sub Task Force*
Gerry Pesavento, *Chair, EFM P2MP Sub Task Force*
Matt Squire, *Chair, EFM OAM Sub Task Force*
Michaël Beck, *Editor, EFM Copper Sub Task Force*
Kevin Q Daines, *Editor, EFM OAM Sub Task Force*
Ariel Maislos, *Editor, EFM P2MP Sub Task Force*

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 36 of 717

Thomas Murphy, *Editor, EFM Optics Sub Task Force*
Ben Brown, *Logic Editor, EFM Task Force*
Glen Kramer, *P2MP Protocol Editor, EFM Task Force*

Ali Abaye
Don Alderrou
Brian Arnold
Simcha Aronson
Doug Artman
Ilan Atias
Eyal Barnea
Bob Barrett
Meir Bartur
Denis Beaudoin
Edward Beili
Randy J. Below
Vincent Bemmel
Mike Bennett
Brad Booth
Peter Bradshaw
Al Braga
Richard Brand
Kevin Brown
Scott Burton
Robert Busse
Jeff Cain
Richard Cam
James T. Carlo
Dan Carnine
Xiaopeng Chen
Jacky Chow
Guss Claessen
George Claseman
Terry Cobb
Charles I. Cook
George Cravens
Chris Cullin
John Dallesasse
Yair Darshan
John De Andrea
Bernard O. Debbasch
Chris Di Minico
Thomas Dineen
Dan Dove
David Dwelley
J. Craig Easley
Edward J. Eckert
John Egan
George Eisler
Kent English
John F. Ewen
Sabina Fanfoni
Robert G. Finch
Alan Flatman
Brian Ford
Yukihiro Fujimoto
Robert D. Gaglianello
Justin Gaither
John George
Floyd Gerhardt
George Ginis
Moty Goldis
Rich Graham
Ajay Gummalla
Jonas Gustafsson
Russ Gyurek
Steven Haas
Stephen Haddock
Chris Hansen
Onn Haran
Adam Healey
Jim Heckroth
Henry Hinrichs
Ryan Hirth
Michael Horvat
Thong Huynh
Steve Jackson
Krista S. Jacobsen
John Jetzt
Wenbin Jiang
Chad Jones
William W. Jones
Ulf Jonsson
Thomas K. Jørgensen
Shinkyo Kaku
Hadriel Kaplan
Roger Karam
John J. Kenny
Lior Khermosh
Chan Kim
Jin H. Kim
Su-Hyung Kim
Marc Kimpe
Neal King
Paul Kolesar
Hans Lackner
Daun Langston
Eric Lawrence
Yannick Le Goff
Ying Lee
Amir Lehr
Amir Leshem
Seyoun Lim
Eric R. Lynskey
Brian MacLeod
Arthur Marris
David W. Martin
Thomas Mathey
Kent McCammon
Michael S. McCormack
Chris McGugan
John Messenger
Tremont Miao
Simon Moseley
Robert Muir
Shimon Muller
Ken Murakami
Gerard Nadeau
Ken Naganuma
Hari Naidu
Nersi Nazari
Erwan Nedellec
Trung Nguyen
Kazuhiro Nojima
Ron Nordin
Bob Noseworthy
Satoshi Obara
John Oberstar
Vladimir Oksman
Aidan O'Rourke
Don Pannell
Glenn Parsons
Antti Pietilainen
Timothy R. Plunkett
Petre Popescu
Carl R. Posthuma
William Quackenbush
Rick Rabinovich
Jerry K. Radcliffe
Ted Rado
Naresh Raman
Robert Reed
Maurice Reintjes
Duane Remein
Lawrence Rennie
Shawn Rogers
Dan Romascanu
Floyd Ross
Dolors Sala
Sam Sambasivan
Concita Saracino
Raj Savara
Sabit Say-Otun
Fred Schindler
Lee Sendelbach
Koichiro Seto
Sunil Shah
Ben Sheppard
Cheng-Chung Shih
Tsuji Shinji
Zion Shohet
Avadhani Shridhar
Ran Soffer
Jaeyeon Song
Massimo Sorbara
Walt Soto
Richard Stuart

Copyright © 2004 IEEE. All rights reserved.

Steve Swanson
Rich Taborek
Mike Tate
Jim Tatum
Pat Thaler
R. Jonathan Thatcher
Walter Thirion
Geoffrey Thompson
David Thorne
Bruce Tolley
Bor-long Twu
Marcos Tzannes
Sterling A. Vaden
Schelto van Doorn
Kumaran Veerayah
Gérard Vergnaud
Chiung Hung Wang
Jeff Warren
Dong Wei
Alan Weissberger
Erica Williamson
Darin Winterton
Tae-Whan Yoo
Osamu Yoshihara
Hong Yu
Nelson Zagalsky
George Zimmerman
Pavel Zivny
Bob Zona

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Roy Bynum
John Barnett
Hugh Barrass
Les Baxter
Michael Beck
Edward Beili
Jacob Ben Ary
Rahul Bhushan
Brad Booth
Benjamin Brown
Steve Carlson
Keith Chow
George Cravens
Guru Dutt Dhingra
Piers Dawe
Wael Diab
Thomas Dineen
Daniel Dove
Sourav Dutta
Edward Eckert
John Ewen
Paul Fitzgerald
David Frattura
Howard Frazier
Yukihiro Fujimoto
Justin Gaither
Robert Grow
Chris Guy
Stephen Haddock
Marian Hargis
Adam Healey
Atsus Hito
Stephen Jackson
Raj Jain
David James
Tony Jeffree
Stanley Johnson
Peter Jones
John Kenny
Stuart Kerry
Marc Kimpe
Neal King
David Law
Pi-Cheng Law
John Lemon
Khermosh Lior
Randolph Little
Robert Love
Eric Lynskey
George Miao
Jose Morales
Ariel Maislos
Roger Marks
Arthur Marris
John Messenger
Steve Methley
Robert Muir
Charles Ngethe
Trung Nguyen
Paul Nikolich
Donald O'Connor
Bob O'Hara
Satoshi Obara
Peter Öhlen
Stephen Palm
Roger Pandanda
Glenn Parsons
Gerry Pesavento
Subbu Ponnuswamy
Vikram Punj
Maximilian Riegel
Floyd Ross
Gyurek Russell
Kevin Schneider
Burkart Schneiderheinze
Marco Scorrano
Gil Shultz
Scott Simon
Gerd Sokolies
Matt Squire
Steven Swanson
Geoffrey Thompson
Scott Valcourt
Frederick Weniger
Oren Yuen
Schelto van Doorn

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 38 of 717

When the IEEE-SA Standards Board approved this standard on 24 June 2004, it had the following membership:

Don Wright, *Chair*
Steve M. Mills, *Vice Chair*
Judith Gorman, *Secretary*

Chuck Adams
H. Stephen Berger
Mark D. Bowman
Joseph A. Bruder
Bob Davis
Roberto de Boisson
Julian Forster*
Arnold M. Greenspan
Mark S. Halpin
Raymond Hapeman
Richard J. Holleman
Richard H. Hulett
Lowell G. Johnson
Joseph L. Koepfinger*
Hermann Koch
Thomas J. McGean
Daleep C. Mohla
Paul Nikolich
T. W. Olsen
Ronald C. Petersen
Gary S. Robinson
Frank Stone
Malcolm V. Thaden
Doug Topping
Joe D. Watson

*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Satish K. Aggarwal, *NRC Representative*
Richard DeBlasio, *DOE Representative*
Alan Cookson, *NIST Representative*

Michelle D. Turner
IEEE Standards Project Editor

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 39 of 717

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 40 of 717

Contents

1. (Changes to) Introduction 2

1.2 Notation 2
1.3 Normative References 2
1.4 Definitions 3
1.5 Abbreviations 5

22. (Changes to) Reconciliation Sublayer (RS) and Media Independent Interface (MII) 7

30. (Changes to) 10 Mb/s, 100 Mb/s, 1000 Mb/s and 10 Gb/s Management 15

30.1 Overview 15
30.11Layer Management for Physical Medium Entity (PME) 57

45. (Changes to) Management Data Input/Output (MDIO) Interface 65

45.1 Overview 65
45.2 MDIO interface registers 65
45.5 Protocol Implementation Conformance Statement (PICS) proforma for Clause 45, MDIO/MDC management interface 124

(Changes to) Annex A (informative) Bibliography 133

(Changes to) Annex 30A (normative) GDMO specification for IEEE 802.3 managed object classes 135

(Changes to) Annex 30B (normative) GDMO and ASN.1 definitions for management 167

(Changes to) Annex 31A (normative) MAC Control opcode assignments 173

(Changes to) Annex 43B (normative) Requirements for support of Slow Protocols 177

56. Introduction to Ethernet for subscriber access networks 179

56.1 Overview 179
56.2 State diagrams 184
56.3 Protocol Implementation Conformance Statement (PICS) proforma 184

57. Operations, Administration, and Maintenance (OAM) 185

57.1 Overview 185
57.2 Functional specifications 187
57.3 Detailed functions and state diagrams 198
57.4 OAMPDUs 209
57.5 OAM TLVs 215
57.6 Variables 224
57.7 Protocol Implementation Conformance Statement (PICS) proforma for Clause 57, Operations, Administration, and Maintenance (OAM) 228

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 41 of 717

58. Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 (Long Wavelength) and 100BASE-BX10 (BiDirectional Long Wavelength) 235

58.1 Overview 235
58.2 PMD functional specifications 237
58.3 PMD to MDI optical specifications for 100BASE-LX10 239
58.4 PMD to MDI optical specifications for 100BASE-BX10 241
58.5 Illustrative 100BASE-LX10 and 100BASE-BX10 channels and penalties (informative) 243
58.6 Jitter at TP1 and TP4 for 100BASE-LX10 and 100BASE-BX10 (informative) 244
58.7 Optical measurement requirements 244
58.8 Environmental, safety and labeling 264
58.9 Characteristics of the fiber optic cabling 265
58.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 58, Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 (Long Wavelength) and 100BASE-BX10 (BiDirectional Long Wavelength) 267

59. Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 (Long Wavelength) and 1000BASE-BX10 (BiDirectional Long Wavelength) 271

59.1 Overview 271
59.2 PMD functional specifications 274
59.3 PMD to MDI optical specifications for 1000BASE-LX10 275
59.4 PMD to MDI optical specifications for 1000BASE-BX10-D and 1000BASE-BX10-U 278
59.5 Illustrative 1000BASE-LX10 and 1000BASE-BX10 channels and penalties (informative) 280
59.6 Jitter specifications 281
59.7 Optical measurement requirements 281
59.8 Environmental, safety and labeling specifications 289
59.9 Characteristics of the fiber optic cabling 290
59.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 59, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 (Long Wavelength) and 1000BASE-BX10 (BiDirectional Long Wavelength) 294

60. Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks) 299

60.1 Overview 299
60.2 PMD functional specifications 302
60.3 PMD to MDI optical specifications for 1000BASE-PX10-D and 1000BASE-PX10-U 304
60.4 PMD to MDI optical specifications for 1000BASE-PX20-D and 1000BASE-PX20-U 306
60.5 Illustrative 1000BASE-PX10 and 1000BASE-PX20 channels and penalties (informative) 308
60.6 Jitter at TP1-4 for 1000BASE-PX10 and 1000BASE-PX20 (informative) 310
60.7 Optical measurement requirements 312
60.8 Environmental, safety, and labeling 318
60.9 Characteristics of the fiber optic cabling 319
60.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 60, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks) 321

61. Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications, type 10PASS-TS and type 2BASE-TL 327

61.1 Overview 327
61.2 PCS functional specifications 336
61.3 TC sublayer functional specifications 350

Copyright © 2004 IEEE. All rights reserved.

61.4 Handshaking and PHY control specification for type 2BASE-TL and 10PASS-TS 368
61.5 Link segment characteristics 373
61.6 MDI specification 374
61.7 System considerations 374
61.8 Environmental specifications 374
61.9 PHY labeling 374
61.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 61, Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications type 10PASS-TS, 2BASE-TL 375

62. Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS 385

62.1 Overview 385
62.2 PMA functional specifications 386
62.3 PMD functional specifications 388
62.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 62, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS 402

63. Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL 407

63.1 2BASE-TL Overview 407
63.2 2BASE-TL PMA functional specifications 410
63.3 2BASE-TL PMD functional specifications 412
63.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 63, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL 417

64. Multi-point MAC Control 421

64.1 Overview 421
64.2 Multi-point MAC Control operation 425
64.3 Multi-Point Control Protocol (MPCP) 439
64.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 64, Multi-point MAC Control 472

65. Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction 477

65.1 Extensions of the Reconciliation Sublayer (RS) for Point to Point Emulation 477
65.2 Extensions of the physical coding sublayer for data detection and forward error correction 481
65.3 Extensions to PMA for 1000BASE-PX 500
65.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 65, Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction 502

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 43 of 717

66. Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport 507

66.1 Modifications to the physical coding sublayer (PCS) and physical medium attachment (PMA) sublayer, type 100BASE-X 507
66.2 Modifications to the physical coding sublayer (PCS) and physical medium attachment (PMA) sublayer, type 1000BASE-X 509
66.3 Modifications to the reconciliation sublayer (RS) for 10 Gb/s operation 510
66.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 66, Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport 512

67. System considerations for Ethernet subscriber access networks 515

67.1 Overview 515
67.2 Discussion and examples of EFM P2MP topologies 516
67.3 Hybrid Media topologies 517
67.4 Topology limitations 517
67.5 Deployment restrictions for subscriber access copper 517
67.6 Operations, Administration, and Maintenance 518

Annex 4A (normative) Simplified full duplex media access control 519

Annex 22D (informative) Clause 22 access to Clause 45 MMD registers 545

Annex 58A (informative) Frame based testing 547

Annex 61A (informative) EFM copper examples 549

Annex 61B (normative) Handshake codepoints for 2BASE-TL and 10PASS-TS 557

Annex 62A (normative) PMD profiles for 10PASS-TS 585

Annex 62B (normative) Performance guidelines for 10PASS-TS PMD profiles 597

Annex 62C (informative) 10PASS-TS Examples 603

Annex 63A (normative) PMD Profiles for 2BASE-TL 609

Annex 63B (normative) Performance guidelines for 2BASE-TL PMD profiles 613

Annex 67A (informative) Environmental characteristics for Ethernet subscriber access networks 619

Copyright © 2004 IEEE. All rights reserved.

List of special symbols

For the benefit of those who have received this document by electronic means, what follows is a list of special symbols and operators. If any of these symbols or operators fail to print out correctly, the editors hope that this table will at least help you to sort out the meaning of the resulting funny-shaped blobs and strokes appearing in the body of the document.

Special symbols and operators

Printed Character	Meaning	Frame V character code	Font
∗	Boolean AND	ALT-042	Symbol
+	Boolean OR, arithmetic addition	ALT-043	Symbol
^	Boolean XOR	^	Times
!	Boolean NOT	ALT-033	Symbol
<	Less than	ALT-060	Symbol
≤	Less than or equal to	ALT-0163	Symbol
=	Equal to	ALT-061	Symbol
≠	Not equal to	ALT-0185	Symbol
≥	Greater than or equal to	ALT-0179	Symbol
>	Greater than	ALT-062	Symbol
⇐	Assignment operator	ALT-0220	Symbol
∈	Indicates membership	ALT-0206	Symbol
∉	Indicates nonmembership	ALT-0207	Symbol
±	Plus or minus (a tolerance)	ALT-0177	Symbol
°	Degrees (as in degrees Celsius)	ALT-0176	Symbol
∑	Summation	ALT-0229	Symbol
—	Big dash (em dash)	Ctrl-q Shft-q	Times
–	Little dash (en dash)	Ctrl-q Shft-p	Times
†	Dagger	ALT-0134	Times
‡	Double dagger	ALT-0135	Times
α	Lower case alpha	a	Symbol
β	Lower case beta	b	Symbol
ε	Lower case epsilon	e	Symbol
γ	Lower case gamma	g	Symbol
√	Square root	ALT-0214	Times

Copyright © 2004 IEEE. All rights reserved.
This is an unapproved IEEE Standards Draft, subject to change

IEEE Standard for Information technology—
Telecommunications and information exchange between systems—
Local and metropolitan area networks—
Specific requirements—

Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications

Amendment: Media Access Control Parameters, Physical Layers, and Management Parameters for Subscriber Access Networks

[These changes are part of IEEE Std 802.3™-2002.]

EDITORIAL NOTE—This amendment is based on the current edition of IEEE Std 802.3-2002 as amended by IEEE Std 802.3ae™-2002, IEEE Std 802.3af™-2003, IEEE Std 802.3aj™-2003, and IEEE Std 802.3ak™-2004. The editing instructions define how to merge the material contained here into this base document set to form the new comprehensive standard as created by the addition of IEEE Std 802.3ah™-2004.

Editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make small corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using ~~strikethrough~~ (to remove old material) or underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. Editorial notes will not be carried over into future editions. ***Replace*** is used to make large changes in existing text, subclauses, tables, or figures by removing existing material and replacing it with new material. Editorial notes will not be carried over into future editions because the changes will be incorporated into the base standard.

Copyright © 2004 IEEE. All rights reserved.

1. Introduction

1.2 Notation

Insert the following to the end of 1.2.5, Hexadecimal notation:

Numerical values designated with a 16 subscript indicate a hexadecimal interpretation of the corresponding-number. For example: $0F_{16}$ represents an 8-bit hexadecimal value of the decimal number 15.

1.3 Normative References

Change existing reference to read as follows:

~~ITU-T Recommendation G.652, 2000—Characteristics of a single-mode opitical fibre cable.~~ITU-T Recommendation G.652, 2003— Characteristics of a single-mode optical fibre and cable.

~~ANSI X3.230-1994 (FC-PH), Information Technology—Fibre Channel—Physical and Signaling Interface.~~ ANSI INCITS 230-1994 (R1999), Information Technology—Fibre Channel—Physical and Signaling Interface (FC-PH) (formerly ANSI X3.230-1994).

Insert the following references in alphabetic order into the reference list in 1.3:

ANSI/EIA-455-95A-2000, Absolute Optical Power Test for Optical Fibers and Cables.

ANSI/EIA/TIA-455-127-1991, FOTP-127 — Spectral Characterization of Multimode Laser Diodes.

ANSI T1.417-2001, Spectrum management for loop transmission systems.

ANSI T1.424-2004, Interface between networks and customer installations - Very-high Speed Digital Subscriber Lines (VDSL) Metallic Interface (Trial-Use Standard).

ETSI TS1 101 270-1 (1999), Transmission and Multiplexing (TM); Access transmission systems on metallic access cables; Very high speed Digital Subscriber Line (VDSL); Part 1: Functional requirements.

ETSI TS 270-2 (2001), Transmission and Multiplexing (TM); Access transmission systems on metallic access cables; Very high speed Digital Subscriber Line (VDSL); Part 2: Transceiver specification.

IEC 61280-2-2 (1998), Fiber optic communication sub-system basic test procedures – Part 2-2: Test procedures for digital systems – Optical eye pattern, waveform, and extinction ratio.

IEC 61754-1:1996, Fibre optic interfaces —Part 1: General and guidance.

ITU-T Recommendation G.991.2 (2001), Amendment 1.

ITU-T Recommendation G.991.2 (2001), Single-Pair High-Speed Digital Subscriber Line (SHDSL) transceivers.

ITU-T Recommendation G.993.1 (2003), Amendment 1.

ITU-T Recommendation G.993.1 (2001), Very high speed digital subscriber line foundation.

ITU-T Recommendation G.994.1 (2004), Handshake procedures for digital subscriber line (DSL) transceivers.

ITU-T Recommendation G.975 (2000), Optical fibre submarine cable systems Forward error correction for submarine systems.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 48 of 717

1.4 Definitions

Change 1.4.10 to the following:

1.4.10 ~~100BASE-FX: IEEE 802.3 Physical Layer specification for a 100 Mb/s CSMA/CD local area network over two optical fibers. (See IEEE 802.3 Clauses 24 and 26.)~~ IEEE 802.3 Physical Layer specification for a 100 Mb/s CSMA/CD local area network over two multimode optical fibers. (See IEEE 802.3 Clauses 24 and 26.)

Insert the following definitions alphabetically into 1.4. Renumber the definitions as required. These definitions will be renumbered in alphabetic order in a future edition of this standard:

1.4.xxx 100BASE-BX10: IEEE 802.3 Physical Layer specification for a 100 Mb/s point to point link over one single mode fiber. The link includes two different specifications for 100BASE-BX10-D and 100BASE-BX10-U. (See IEEE 802.3 Clauses 58 and 66.)

1.4.xxx 100BASE-LX10: IEEE 802.3 Physical Layer specification for a 100 Mb/s point to point link over two single mode optical fibers. (See IEEE 802.3 Clauses 58 and 66.)

1.4.xxx 1000BASE-BX10: IEEE 802.3 Physical Layer specification for a 1000 Mb/s point to point link over one single mode optical fiber. (See IEEE 802.3 Clauses 59 and 66.)

1.4.xxx 1000BASE-LX10: IEEE 802.3 Physical Layer specification for a 1000 Mb/s point to point link over two single-mode or multimode optical fibers. (See IEEE 802.3 Clauses 59 and 66.)

1.4.xxx 1000BASE-PX10: IEEE 802.3 Physical Layer specification for a 1000 Mb/s point to multi-point link over one single mode optical fiber, with a reach of up to 10 km. (See IEEE 802.3 Clauses 60, 65, and 66.)

1.4.xxx 1000BASE-PX20: IEEE 802.3 Physical Layer specification for a 1000 Mb/s point to multi-point link over one single mode optical fiber, with a reach of up to 20 km. (See IEEE 802.3 Clauses 60, 65, and 66.)

1.4.xxx 10PASS-TS: IEEE 802.3 Physical Layer specification up to 100 Mb/s point to point link over single copper wire pair. (See IEEE 802.3 Clauses61 and 62.)

1.4.xxx 2BASE-TL: IEEE 802.3 Physical Layer specification up to 5.696 Mb/s point to point link over single copper wire pair. (See IEEE 802.3 Clauses 61 and 63.)

1.4.xxx Aggregation group: A collection of PMEs that may be aggregated according to a particular implementation of the PME aggregation function. (See IEEE 802.3 subclause 61.2.2.)

1.4.xxx Bandplan: The set of parameters that control the lowest and highest frequencies and power at which 10PASS-TS and 2BASE-TL may operate.

1.4.xxx Coupled Power Ratio (CPR): The ratio (in dB) of the total power coupled into a multimode fiber to the optical power that can be coupled into a single-mode fiber.

1.4.xxx Downstream: In an access network, where there is a clear indication in each deployment as to which end of a link is closer to a subscriber, transmission toward the subscriber end of the link.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 49 of 717

1.4.xxx Grant: Within P2MP protocols, a permission to transmit at a specific time, for a specific duration. Grants are issued by the OLT (master) to ONUs (slaves) by means of GATE messages.

1.4.xxx Logical Link Identifier (LLID): A numeric identifier assigned to a P2MP association between an OLT and ONU established through the Point-to-Point Emulation sublayer. Each P2MP association is assigned a unique LLID. The P2MP association is bound to an ONU DTE, where a MAC would observe a private association.

1.4.xxx OAM Discovery: Process that detects the presence and configuration of the OAM sublayer in the remote DTE.

1.4.xxx Operations, Administration, and Maintenance (OAM): A group of network support functions that monitor and sustain segment operation, activities that are concerned with, but not limited to, failure detection, notification, location, and repairs that are intended to eliminate faults and keep a segment in an operational state and support activities required to provide the services of a subscriber access network to users/ subscribers.

1.4.xxx Optical Line Terminal (OLT): The network-end DTE for an optical access network. The OLT is the master entity in a P2MP network with regard to the MPCP protocol.

1.4.xxx Optical Network Unit (ONU): The subscriber-end DTE to an optical access network. An ONU is a slave entity in a P2MP network with regard to the MPCP protocol.

1.4.xxx P2MP Discovery: Process by which the OLT finds a newly attached and active ONU in the P2MP network, and by which the OLT and ONU exchange registration information. The OLT sends a GATE flagged for discovery.

1.4.xxx P2MP Discovery window: A time period in a given wavelength band reserved by the OLT exclusively for the discovery process.

1.4.xxx P2MP Timestamp: The timestamp used to synchronize slaves (e.g., ONUs) with the master (OLT) and for the ranging process.

1.4.xxx Point to Multi-Point Network (P2MP): A passive optical network providing transport of Ethernet frames (See Clauses 64 and 65).

1.4.xxx Point-to-point emulation (P2PE): Emulation of private communication between two end-stations (e.g., ONU) in a P2MP. Emulation creates the equivalent of a star topology with the OLT in the nexus, and is required for compliance with IEEE 802.1D bridging.

1.4.xxx Ranging: A procedure by which the propagation delay between a master (e.g., OLT) and slave (e.g., ONU) is measured. The round trip delay computation is performed by the OLT, using the timestamp in MPCP messages from the ONU.

1.4.xxx Reflectance: Ratio of reflected to incident power. This is the inverse of return loss.

1.4.xxx Upstream: In an access network, transmission away from the subscriber end of the link. Applicable to networks where there is a clear indication in each deployment as to which end of a link is closer to a subscriber.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 50 of 717

1.5 Abbreviations

Insert the following abbreviations in alphabetic order into the abbreviations list in 1.5:

10P	label to indicate “pertains to 10PASS-TS port-type”
10P/2B	label to indicate “pertains to 10PASS-TS and 2BASE-TL port-types”
2B	label to indicate “pertains to 2BASE-TL port-type”
2-PAM	two level pulse amplitude modulation
CO	central office
CPE	customer premises equipment
CPR	coupled power ratio
DA	destination address
DMT	discrete multi-tone
DSL	digital subscriber line
EFM	Ethernet in the first mile
FEC	forward error correction
FSW	frame synchronization word
IB	indicator bits
LLID	logical link identifier
LT	line termination
MDIO	management data input/output
MPCP	multi-point control protocol
NT	network termination
OAM	operations, administration, and maintenance
OAMPDU	operations, administration, and maintenance protocol data unit
ODN	optical distribution network
OH	overhead
OLT	optical line terminal
ONU	optical network unit
ORLT	optical return loss tolerance
P2MP	point to multi-point
P2P	point to point
P2PE	point-to-point emulation
PAF	PME aggregation function
PAM	pulse amplitude modulation
PME	physical medium entity
PMS-TC	physical media specific - transmission convergence
PSD	power spectral density
SA	source address
SHDSL	single-pair high-speed digital subscriber line
TC	transmission convergence
TCM	trellis coded modulation
TPS-TC	transport protocol specific transmission convergence sublayer
UPBO	upstream power back-off
VDSL	very high speed digital subscriber line
VTU	VDSL transceiver unit
VTU-O	VTU at the central office end
VTU-R	VTU at the remote end
xDSL	generic term covering the family of all DSL technologies

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 51 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 52 of 717

22. Reconciliation Sublayer (RS) and Media Independent Interface (MII)

22.2.4 Management functions

Change the third paragraph of this subclause (IEEE Std 802.3af-2003) as follows:

The MII basic register set consists of two registers referred to as the Control register (Register 0) and the Status register (Register 1). All PHYs that provide an MII shall incorporate the basic register set. All PHYs that provide a GMII shall incorporate an extended basic register set consisting of the Control register (Register 0), Status register (Register 1), and Extended Status register (Register 15). The status and control functions defined here are considered basic and fundamental to 100 Mb/s and 1000 Mb/s PHYs. Registers 2 through ~~12~~14 are part of the extended register set. The format of Registers 4 through 10 are defined for the specific Auto-Negotiation protocol used (Clause 28 or Clause 37). The format of these registers is selected by the bit settings of Registers 1 and 15.

Change Table 22-6 (IEEE Std 802.3af-2003) as follows:

Table 22–6—MII management register set

Register address	Register name	Basic/Extended	
		MII	GMII
0	Control	B	B
1	Status	B	B
2, 3	PHY Identifier	E	E
4	Auto-Negotiation Advertisement	E	E
5	Auto-Negotiation Link Partner Base Page Ability	E	E
6	Auto-Negotiation Expansion	E	E
7	Auto-Negotiation Next Page Transmit	E	E
8	Auto-Negotiation Link Partner Received Next Page	E	E
9	MASTER-SLAVE Control Register	E	E
10	MASTER-SLAVE Status Register	E	E
11	PSE Control Register	E	E
12	PSE Status Register	E	E
~~13,14~~	~~Reserved~~	~~E~~	~~E~~
13	MMD Access Control Register	E	E
14	MMD Access Address Data Register	E	E
15	Extended Status	Reserved	B
16 through 31	Vendor Specific	E	E

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 53 of 717

22.2.4.1 Control register (Register 0)

Change Table 22-7 as follows:

Table 22–7—Control register bit definitions

Bit(s)	Name	Description	R/W[a]
0.15	Reset	1 = PHY reset 0 = normal operation	R/W SC
0.14	Loopback	1 = enable loopback mode 0 = disable loopback mode	R/W
0.13	Speed Selection (LSB)	0.6 0.13 1 1 = Reserved 1 0 = 1000 Mb/s 0 1 = 100 Mb/s 0 0 = 10 Mb/s	R/W
0.12	Auto-Negotiation Enable	1 = ~~E~~enable Auto-Negotiation ~~P~~process 0 = ~~D~~disable Auto-Negotiation ~~P~~process	R/W
0.11	Power Down	1 = power down 0 = normal operation[b]	R/W
0.10	Isolate	1 = electrically Isolate PHY from MII or GMII 0 = normal operation[b]	R/W
0.9	Restart Auto-Negotiation	1 = ~~R~~restart Auto-Negotiation ~~P~~process 0 = normal operation	R/W SC
0.8	Duplex Mode	1 = ~~F~~full ~~D~~duplex 0 = ~~H~~half ~~D~~duplex	R/W
0.7	Collision Test	1 = enable COL signal test 0 = disable COL signal test	R/W
0.6	Speed Selection (MSB)	0.6 0.13 1 1 = Reserved 1 0 = 1000 Mb/s 0 1 = 100 Mb/s 0 0 = 10 Mb/s	R/W
0.5	Unidirectional enable	When bit 0.12 is one or bit 0.8 is zero, this bit is ignored. When bit 0.12 is zero and bit 0.8 is one: 1 = Enable transmit from media independent interface regardless of whether the PHY has determined that a valid link has been established 0 = Enable transmit from media independent interface only when the PHY has determined that a valid link has been established	R/W
~~0.5:0~~ 0.4:0	Reserved	Write as 0, ignore on ~~R~~read	R/W

[a]R/W = Read/Write, SC = Self-Clearing.
[b]For normal operation, both 0.10 and 0.11 must be cleared to zero; see 22.2.4.1.5.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 54 of 717

Change 22.2.4.1.11 to read

22.2.4.1.11 Reserved bits

Bits ~~0.5:0~~0.4:0 are reserved for future standardization. They shall be written as zero and shall be ignored when read; however, a PHY shall return the value zero in these bits.

Insert subclause:

22.2.4.1.12 Unidirectional enable

If a PHY reports via bit 1.7 that it lacks the ability to encode and transmit data from the media independent interface regardless of whether the PHY has determined that a valid link has been established, the PHY shall return a value of zero in bit 0.5, and any attempt to write a one to bit 0.5 shall be ignored.

The ability to encode and transmit data from the media independent interface regardless of whether the PHY has determined that a valid link has been established is controlled by bit 0.5 as well as the status of Auto-Negotiation Enable bit 0.12 and the Duplex Mode bit 0.8 as this ability can only be supported if Auto-Negotiation is disabled and the PHY is operating in full-duplex mode. If bit 0.5 is set to a logic one, bit 0.12 to logic zero and bit 0.8 to logic one, encoding and transmitting data from the media independent interface shall be enabled regardless of whether the PHY has determined that a valid link has been established. If bit 0.5 is set to a logic zero, bit 0.12 to logic one or bit 0.8 to logic zero, encoding and transmitting data from the media independent interface shall be dependent on whether the PHY has determined that a valid link has been established. When bit 0.12 is one or bit 0.8 is zero, bit 0.5 shall be ignored.

A management entity shall set bit 0.5 to a logic one only after it has enabled an associated OAM sublayer (see Clause 57) or if this device is a 1000BASE-PX-D PHY. A management entity shall clear bit 0.5 to a logic zero prior to it disabling an associated OAM sublayer when this device is not a 1000BASE-PX-D PHY. To avoid collisions, a management entity should not set bit 0.5 of a 1000BASE-PX-U PHY to a logic one.

The default value of bit 0.5 is zero, except for 1000BASE-PX-D, where it is one.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 55 of 717

22.2.4.2 Status register (Register 1)

Change the ninth row of Table 22-8:

Table 22–8—Status register bit definitions

Bit(s)	Name	Description	R/W[a]
1.15	100BASE-T4	1 = PHY able to perform 100BASE-T4 0 = PHY not able to perform 100BASE-T4	RO
1.14	100BASE-X Full Duplex	1 = PHY able to perform full duplex 100BASE-X 0 = PHY not able to perform full duplex 100BASE-X	RO
1.13	100BASE-X Half Duplex	1 = PHY able to perform half duplex 100BASE-X 0 = PHY not able to perform half duplex 100BASE-X	RO
1.12	10 Mb/s Full Duplex	1 = PHY able to operate at 10 Mb/s in full duplex mode 0 = PHY not able to operate at 10 Mb/s in full duplex mode	RO
1.11	10 Mb/s Half Duplex	1 = PHY able to operate at 10 Mb/s in half duplex mode 0 = PHY not able to operate at 10 Mb/s in half duplex mode	RO
1.10	100BASE-T2 Full Duplex	1 = PHY able to perform full duplex 100BASE-T2 0 = PHY not able to perform full duplex 100BASE-T2	RO
1.9	100BASE-T2 Half Duplex	1 = PHY able to perform half duplex 100BASE-T2 0 = PHY not able to perform half duplex 100BASE-T2	RO
1.8	Extended Status	1 = Extended status information in Register 15 0 = No extended status information in Register 15	RO
1.7	~~Reserved~~Unidirectional ability	~~ignore when read~~ 1 = PHY able to transmit from media independent interface regardless of whether the PHY has determined that a valid link has been established 0 = PHY able to transmit from media independent interface only when the PHY has determined that a valid link has been established	RO
1.6	MF Preamble Suppression	1 = PHY will accept management frames with preamble suppressed. 0 = PHY will not accept management frames with preamble suppressed.	RO
1.5	Auto-Negotiation Complete	1 = Auto-Negotiation process completed 0 = Auto-Negotiation process not completed	RO
1.4	Remote Fault	1 = remote fault condition detected 0 = no remote fault condition detected	RO/ LH
1.3	Auto-Negotiation Ability	1 = PHY is able to perform Auto-Negotiation 0 = PHY is not able to perform Auto-Negotiation	RO
1.2	Link Status	1 = link is up 0 = link is down	RO/LL
1.1	Jabber Detect	1 = jabber condition detected 0 = no jabber condition detected	RO/LH
1.0	Extended Capability	1 = extended register capabilities 0 = basic register set capabilities only	RO

[a]RO = Read Only, LL = Latching Low, LH = Latching High

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 56 of 717

Replace 22.2.4.2.8 with the following

22.2.4.2.8 Unidirectional ability

When read as a logic one, bit 1.7 indicates that the PHY has the ability to encode and transmit data from the media independent interface regardless of whether the PHY has determined that a valid link has been established. When read as a logic zero, bit 1.7 indicates the PHY is able to transmit data from the media independent interface only when the PHY has determined that a valid link has been established.

A PHY shall return a value of zero in bit 1.7 if it is not a 100BASE-X PHY using the PCS and PMA specified in 66.1 or a 1000BASE-X PHY using the PCS and PMA specified in 66.2.

22.2.4.3 Extended capability registers

Change the first paragraph of this subclause (IEEE Std 802.3af-2003) as follows:

In addition to the basic register set defined in 22.2.4.1 and 22.2.4.2, PHYs may provide an extended set of capabilities that may be accessed and controlled via the MII management interface. Thirteen~~Eleven~~ registers have been defined within the extended address space for the purpose of providing a PHY-specific identifier to layer management, to provide control and monitoring for the Auto-Negotiation process, ~~and~~ to provide control and monitoring of power sourcing equipment, and to provide MDIO Manageable Device (MMD) register access.

Insert the following new subclauses after subclause 22.2.4.3.10, renumber current subclause 22.2.4.3.11 to 22.2.4.3.13. Renumber current tables after the newly inserted tables.

22.2.4.3.11 MMD access control register (Register 13)

The assignment of bits in the MMD access control register is shown in Table 22–9. The MMD access control register is used in conjunction with the MMD access address data register (Register 14) to provide access to the MMD address space using the interface and mechanisms defined in 22.2.4.

Table 22–9—MMD access control register bit definitions

Bit(s)	Name	Description	R/W[a]
13.15:14	Function	13.15 13.14 0 0 = address 0 1 = data, no post increment 1 0 = data, post increment on reads and writes 1 1 = data, post increment on writes only	R/W
13.13:5	Reserved	Write as 0, ignore on read	R/W
13.4:0	DEVAD	Device address	R/W

[a]R/W = Read/Write

Each MMD maintains its own individual address register as described in 45.2.7. The DEVAD field directs any accesses of Register 14 to the appropriate MMD as described in 45.2. If the access of Register 14 is an address access (bits 13.15:14 = 00) then it is directed to the address register within the MMD associated with the value in the DEVAD field (bits 13.4:0). Otherwise, both the DEVAD field and that MMD's address register direct the Register 14 data accesses to the appropriate registers within that MMD.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 57 of 717

The Function field can be set to any of four values:

a) When set to 00, accesses to Register 14 access the MMD's individual address register. This address register should always be initialized before attempting any accesses to other MMD registers.

b) When set to 01, accesses to Register 14 access the register within the MMD selected by the value in the MMD's address register.

c) When set to 10, accesses to Register 14 access the register within the MMD selected by the value in the MMD's address register. After that access is complete, for both read and write accesses, the value in the MMD's address field is incremented.

d) When set to 11, accesses to Register 14 access the register within the MMD selected by the value in the MMD's address register. After that access is complete, for write accesses only, the value in the MMD's address field is incremented. For read accesses, the value in the MMD's address field is not modified.

For additional insight into the operation and usage of this register, see Annex 22D.

22.2.4.3.12 MMD access address data register (Register 14)

The assignment of bits in the MMD access address data register is shown in Table 22–10. The MMD access address data register is used in conjunction with the MMD access control register (Register 13) to provide access to the MMD address space using the interface and mechanisms defined in 22.2.4. Accesses to this register are controlled by the value of the fields in Register 13 and the contents of the MMD's individual address field as described in 22.2.4.3.11.

Table 22–10—MMD access address data register bit definitions

Bit(s)	Name	Description	R/W[a]
14.15:0	Address Data	If 13.15:14 = 00, MMD DEVAD's address register. Otherwise, MMD DEVAD's data register as indicated by the contents of its address register	R/W

[a]R/W = Read/Write

For additional insight into the operation and usage of this register, see Annex 22D.

22.7.2.3 Major capabilities/options

Insert the following major capability/option into 22.7.2.3 after *GM:

Item	Feature	Subclause	Status	Support	Value/Comment
*MUNI	Implementation of unidirectional PCS	22.2.4	O	Yes [ ] No [ ]	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 58 of 717

22.7.3.4 Management functions

Insert the following PICS items into 22.7.3.4 after MF37, and renumber the following PICS items:

Item	Feature	Subclause	Status	Support	Value/Comment
MF38	PHY without unidirectional ability	22.2.4.1.12	M	Yes [ ] NA [ ]	PHY returns a value of 0 in 0.5 if 1.7=0
MF39	PHY without unidirectional ability	22.2.4.1.12	M	Yes [ ] NA [ ]	PHY always maintains a value of 0 in 0.5 if 1.7=0
MF40	Unidirectional enable	22.2.4.1.12	MUNI:M	Yes [ ] NA [ ]	By setting 0.12 = 0, 0.8 = 1 and 0.5 = 1
MF41	Unidirectional disable	22.2.4.1.12	MUNI:M	Yes [ ] NA [ ]	By setting 0.12 = 1, 0.8 = 0 or 0.5 = 0
MF42	Ignore bit 0.5	22.2.4.1.12	MUNI:M	Yes [ ] NA [ ]	Ignore 0.5 when 0.12 = 1 or 0.8 = 0
MF43	Enable unidirectional mode	22.2.4.1.12	MUNI:M	Yes [ ] NA [ ]	Enable only when OAM sub-layer is enabled or when part of 1000BASE-PX-D PHY
MF44	Disable unidirectional mode	22.2.4.1.12	MUNI:M	Yes [ ] NA [ ]	Unidirectional mode is disabled before disabling OAM sublayer when not part of 1000BASE-PX-D PHY
MF45	Unidirectional ability	22.2.4.2.8	M	Yes [ ] NA [ ]	Bit 1.7 = 0 for all PHYs except those using 66.1 and 66.2

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 59 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 60 of 717

30. 10 Mb/s, 100 Mbs, 1000 Mb/s and 10Gb/s Management

Change the title of this clause as follows:

30. ~~10 Mb/s, 100 Mb/s, 1000 Mb/s and 10 Gb/s~~ Management

30.1 Overview

Change the first paragraph of this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3af-2003):

This clause provides the Layer Management specification for DTEs, repeaters, and MAUs based on the CSMA/CD access method. The clause is produced from the ISO framework additions to Clause 5, Layer Management; Clause 19, Repeater Management; and Clause 20, MAU Management. It incorporates additions to the objects, attributes, and behaviours to support 100 Mb/s, 1000 Mb/s and 10 Gb/s, full duplex operation, MAC Control, Link Aggregation, ~~and~~ DTE Power via MDI, and subscriber access networks.

30.1.1 Scope

Change the first paragraph of this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3af-2003):

This clause includes selections from Clauses 5, 19, and 20. It is intended to be an entirely equivalent specification for the management of 10 Mb/s DTEs, 10 Mb/s baseband repeater units, and 10 Mb/s integrated MAUs. It incorporates additions to the objects, attributes, and behaviours to support subsequent additions to this standard.~~It also includes the additions for management of MAC Control, DTEs and repeaters at speeds greater than 10 Mb/s, embedded MAUs, PHYs and DTE Power via MDI.~~ Implementations of management for DTEs, repeater units, and embedded MAUs should follow the requirements of this clause (e.g., a 10 Mb/s implementation should incorporate the attributes to indicate that it is not capable of 100 Mb/s or 1000 Mb/s operation~~,~~; half duplex DTE should incorporate the attributes to indicate that it is not capable of full duplex operation, etc.).

30.1.2 Relationship to objects in IEEE 802.1F

Change the second paragraph of this subclause as follows (as modified by IEEE Std 802.3af-2003):

oResourceTypeID

This object class is mandatory and shall be implemented as defined in IEEE 802.1F. This object is bound to oMAC-Entity, oRepeater, oMidSpan and oMAU as defined by the NAME BINDINGs in 30A.10.1. Note that the binding to oMAU is mandatory only when MII is present. The Entity Relationship Diagrams, Figures 30–3, 30–4, and 30–~~4~~5, shows these bindings pictorially.

30.1.4 Management model

Change the second last paragraph of this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3af-2003):

The above items are defined in 30.3 through ~~30.10~~ 30.3.7 of this clause in terms of the template requirements of ISO/IEC 10165-4: 1991.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 61 of 717

30.2.2.1 Text description of managed objects

Change the following paragraphs of this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3af-2003):

In case of conflict, the formal behaviour definitions in 30.3, 30.4, 30.5, 30.6, and 30.7 take precedence over the text descriptions in this subclause.

oAggPortDebugInformation
If oAggregator is implemented, a single instance of oAggPortDebugInformation may be contained within oAggregationPort. This managed object class provides optional additional information that can assist with debugging and fault finding in Systems that support Link Aggregation.

oAggPortStats If oAggregator is implemented, a single instance of oAggPortStats may be contained within oAggregationPort. This managed object class provides optional additional statistics related to LACP and Marker protocol activity on an instance of an Aggregation Port that is involved in Link Aggregation.

oAggregationPort If oAggregator is implemented, oAggregationPort is contained within oAggregator. An instance of this managed object class is present for each Aggregation Port that is part of the aggregation represented by the oAggregator instance. This managed object class provides the basic management controls necessary to allow an instance of an Aggregation Port to be managed, for the purposes of Link Aggregation.

oAggregator If implemented, oAggregator is the top-most managed object class of the DTE ~~portion of the~~ containment tree shown in Figure 30–3. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this International Standard. The oAggregator managed object class provides the management controls necessary to allow an instance of an Aggregator to be managed.

oAutoNegotiation The managed object of that portion of the containment tree<u>s</u> shown in Figure 30–3<u> and Figure 30–4</u>. The attributes, notifications, and actions defined in this subclause are contained within the MAU managed object.

oGroup The group managed object class is a view of a collection of repeater ports.

oMACControlEntity If implemented<u>, and if oOAM is implemented, a single instance of oMACControlEntity is contained within oOAM. Otherwise, if implemented,</u> and if oAggregator is implemented, oMACControlEntity is contained within oAggregator. Otherwise, if implemented, oMACControlEntity becomes the top-most managed object class of the DTE ~~portion of the~~ containment tree shown in Figure 30–3. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this International Standard.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 62 of 717

oMACControlFunctionEntity

If implemented, oMACControlFunctionEntity is contained within oMACControlEntity. The oMACControlFunctionEntity managed object class provides the management controls necessary to allow an instance of the MAC Control PAUSE function to be managed. ~~Contained within oMACControlEntity. Each function defined and implemented within the MAC Control sublayer has an associated oMACControlFunctionEntity for the purpose of managing that function.~~

oMACEntity — If oMACControlEntity is implemented, oMACEntity is contained within oMACControlEntity. Otherwise, if oOAM is implemented, oMACEntity is contained within oOAM. Otherwise, if oAggregator is implemented, oMACEntity is contained within oAggregator. Otherwise, oMACEntity becomes the top-most managed object class of the DTE ~~portion of the~~ containment tree shown in Figure 30–3. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this International Standard.

oMAU — The managed object of that portion of the containment trees shown in Figure 30–3 and Figure 30–4. The attributes, notifications, and actions defined in this subclause are contained within the MAU managed object. Neither counter values nor the value of MAUAdminState is required to be preserved across events involving the loss of power.

oMidSpan — The top-most managed object class of the Midspan containment tree shown in Figure 30–5~~4~~. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this standard.

oMPCP — If implemented, oMPCP is contained within oMACControlEntity. The oMPCP managed object class provides the management controls necessary to allow an instance of the Multi-Point MAC Control function to be managed.

oOAM — If implemented, and if oAggregator is implemented, oOAM is contained within oAggregator. An instance of this managed object class is present for each Aggregation Port that is part of the aggregation represented by the oAggregator instance. Otherwise, if implemented, oOAM becomes the top-most managed object class of the DTE containment tree shown in Figure 30–3. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this International Standard.

oOMPEmulation — If implemented, oOMPEmulation is contained within oMACEntity. The oOMPEmulation managed object class provides the management controls necessary to allow an instance of an OMPEmulation sublayer to be managed.

oPHYEntity — If oOMPEmulation is implemented, oPHYEntity is contained within oOMPEmulation. Otherwise oPHYEntity is c~~C~~ontained within oMACEntity. Many instances of oPHYEntity may coexist within one instance of oMACEntity; however, only one PHY may be active for data transfer to and from the MAC at any one time. oPHYEntity is the managed object that contains the MAU, PAF and PSE managed objects in a DTE.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 63 of 717

oPAF	The oPAF managed object class provides the management controls necessary to allow an instance of a PME aggregation function (PAF) to be managed. The PAF managed object class also provides a view of a collection of PMEs.
oPME	The oPME managed object class provides the management controls necessary to allow an instance of a PME to be managed. The oPAF managed object contains the PME managed object in a DTE.
oPSE	The managed object of that portion of the containment trees shown in Figure 30–3, Figure 30–4, and Figure 30–54. The attributes and actions defined in this subclause are contained within the oPSE managed object.
oPSEGroup	The PSE Group managed object class is a view of a collection of PSEs.
oRepeater	The top-most managed object class of the repeater ~~portion of the~~ containment tree shown in Figure 30–4~~Figure30-3~~. Note that this managed object class may be contained within another superior managed object class. Such containment is expected, but is outside the scope of this standard.
oRepeaterMonitor	A managed object class called out by IEEE Std 802.1F-1993. See 30.1.2, oEWMAMetricMonitor.
oRepeaterPort	The repeater port managed object class provides a view of the functional link between the data transfer service and a single PMA. The attributes associated with repeater port deal with the monitoring of traffic being handled by the repeater from the port and control of the operation of the port. The Port Enable/Disable function as reported by portAdminState is preserved across events involving loss of power. The oRepeaterPort managed object contains the MAU managed object in a repeater set. NOTE—Attachment to nonstandard PMAs is outside the scope of this standard.
oResourceTypeID	A managed object class called out by IEEE Std 802.1F-1993. It is used within this clause to identify manufacturer, product, and revision of managed components that implement functions and interfaces defined within IEEE 802.3. The Clause 22 MII or Clause 35 GMII specifies two registers to carry PHY Identifier (22.2.4.3.1), which provides succinct information sufficient to support oResourceTypeID.
oWIS	The managed object of that portion of the containment tree shown in Figure 30–3. The attributes defined in this subclause are contained within the oMAU managed object.

30.2.3 Containment

Change the first paragraph of this subclause as follows (as modified by IEEE Std 802.3af-2003):

A containment relationship is a structuring relationship for managed objects in which the existence of a managed object is dependent on the existence of a containing managed object. The contained managed object is said to be the subordinate managed object, and the containing managed object the superior managed object. The containment relationship is used for naming managed objects. The local containment relationships among object classes are depicted in the entity relationship diagrams, Figure 30–3, through Figure 30–5 ~~and Figure 30–4~~. These figures show the names of the object classes and whether a particular containment relationship is one-to-one, ~~or~~ one-to-many, or many-to-one. For further requirements on this topic, see IEEE Std 802.1F-1993. PSE management is only valid in a system that provides management at the next higher containment level, that is, either a DTE, repeater or Midspan with management.

Copyright © 2004 IEEE. All rights reserved.

Replace Figure 30–3 with the following:

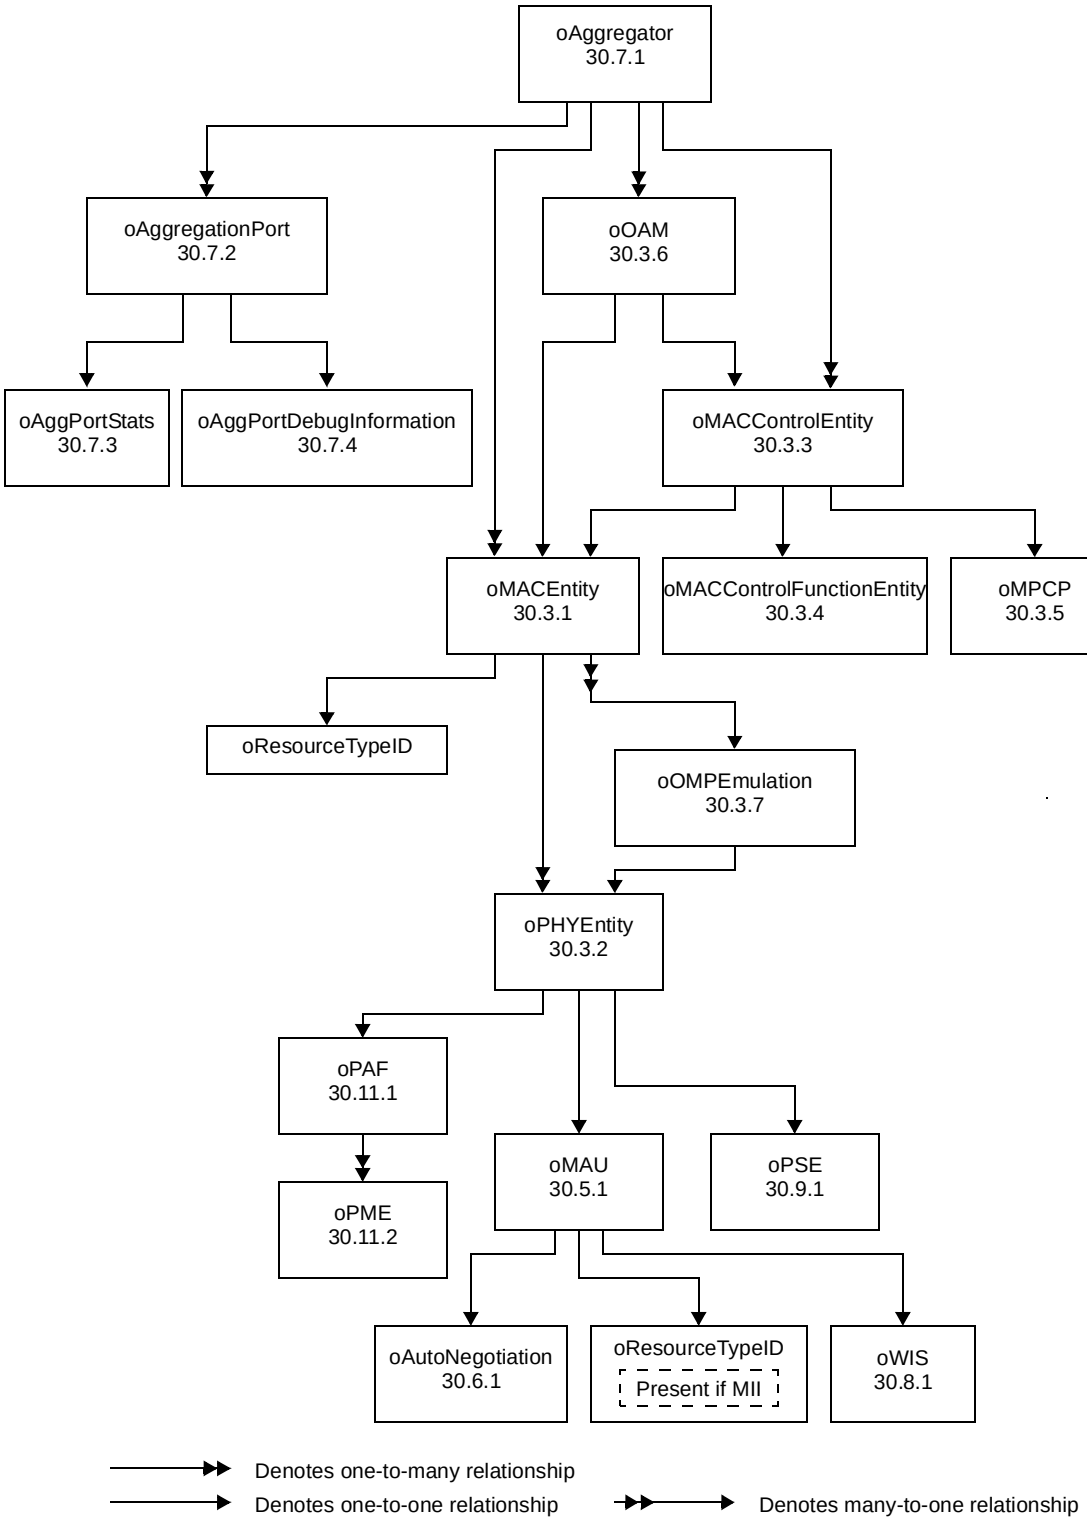


Figure 30–3—DTE System entity relationship diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 65 of 717

Insert new Figure 30–4 as follows. Renumber existing figures as required.

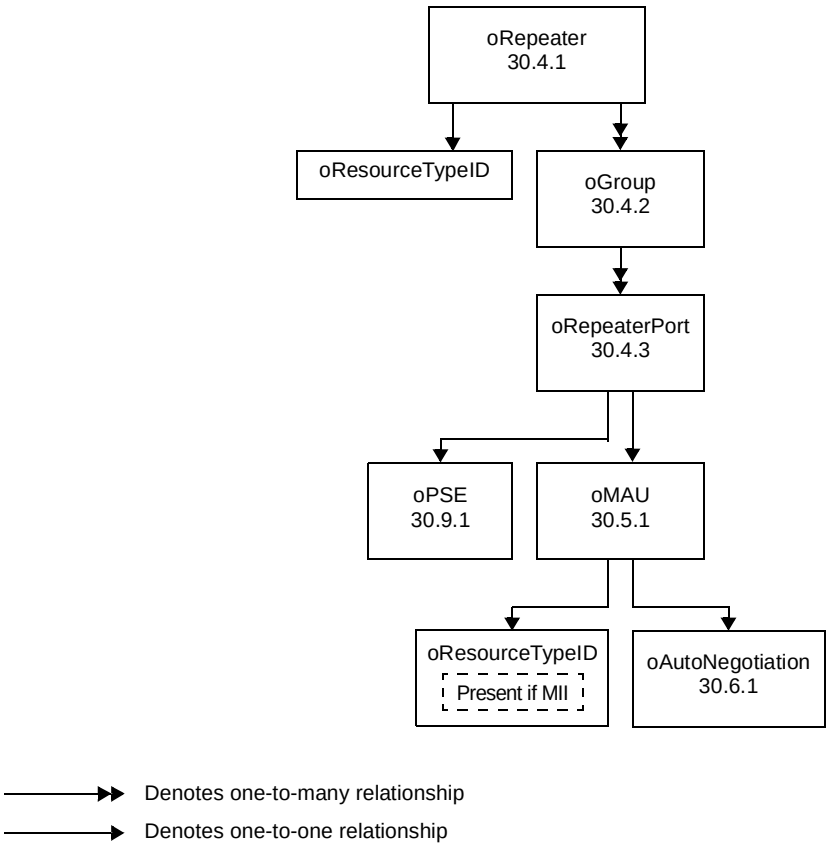


Figure 30–4—Repeater entity relationship diagram

30.2.5 Capabilities

Change the first paragraph of this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3af-2003):

This standard makes use of the concept of *packages* as defined in ISO/IEC 10165-4: 1992 as a means of grouping behaviour, attributes, actions, and notifications within a managed object class definition. Packages may either be mandatory, or be conditional, that is to say, present if a given condition is true. Within this standard *capabilities* are defined, each of which corresponds to a set of packages, which are components of a number of managed object class definitions and which share the same condition for presence. Implementation of the appropriate basic and mandatory packages is the minimum requirement for claiming conformance to IEEE 802.3 Management. Implementation of an entire optional capability is required in order to claim conformance to that capability. The capabilities and packages for IEEE 802.3 Management are specified in Tables 30–1 through ~~30–4~~ 30–5.

In Tables 30-1a, 30-1b, 30-1c, 30-1d and 30-1e change the DTE and MAU column heading ‘100/1000 Mb/s Monitor Capability (Optional)’ ***to read*** ‘PHY Error Monitor Capability (Optional)’.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 66 of 717

Insert the following entries to Table 30–1b after 'aRateControlStatus' (as modified by IEEE Std 802.3ae-2002):

				DTE								Repeater					MAU					
				Basic Package (Mandatory)	Mandatory Package (Mandatory)	Recommended Package (Optional)	Optional Package (Optional)	Array Package (Optional)	Excessive Deferral Package (Optional)	Multiple PHY Package (Optional)	PHY Error Monitor Capability (Optional)	Basic Control Capability (Mandatory)	Performance Monitor Capability (Optional)	Address Tracking Capability (Optional)	100/1000 Mb/s Monitor Capability (Optional)	1000 Mb/s Burst Monitor Capability (Optional)	Basic Package (Mandatory)	MAU Control Package (Optional)	Media Loss Tracking Package (Conditional)	Broadband DTE MAU Package (Conditional)	MII Capability (Conditional)	PHY Error Monitor Capability (Optional)	Auto-Negotiation Package (Mandatory)
	aDeferControlAbility	ATTRIBUTE	GET		X																	
	aDeferControlStatus	ATTRIBUTE	GET-SET		X																	

Change the following entry in Table 30–1c (as modified by IEEE 802.3ae-2002):

				DTE								Repeater					MAU					
				Basic Package (Mandatory)	Mandatory Package (Mandatory)	Recommended Package (Optional)	Optional Package (Optional)	Array Package (Optional)	Excessive Deferral Package (Optional)	Multiple PHY Package (Optional)	PHY Error Monitor Capability (Optional)	Basic Control Capability (Mandatory)	Performance Monitor Capability (Optional)	Address Tracking Capability (Optional)	100/1000 Mb/s Monitor Capability (Optional)	1000 Mb/s Burst Monitor Capability (Optional)	Basic Package (Mandatory)	MAU Control Package (Optional)	Media Loss Tracking Package (Conditional)	Broadband DTE MAU Package (Conditional)	MII Capability (Conditional)	PHY Error Monitor Capability (Optional)	Auto-Negotiation Package (Mandatory)

o<u>MACControlFunction</u>~~PAUSE~~Entity managed object class ~~(instance of oMACControlFunctionEntity)~~ (30.3.4)

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 67 of 717

Insert the following new table after Table 30–4:

Table 30–5—EFM Capabilities

			DTE				MAU		PME		
			Multi-Point Control Protocol Package (Conditional)	Operation Administration Maintenance Package (Conditional)	Optical Multipoint Emulation Package (Conditional)	Optical Multipoint Emulation Monitor Package (Optional)	PCS Code Error Monitor Package (Optional)	Forward Error Correction Package (Conditional)	Basic Package (Mandatory)	PME Aggregation Package (Optional)	10P/2B Package (Mandatory)
oMPCP managed object class (30.3.5)											
aMPCPID	ATTRIBUTE	GET	X								
aMPCPAdminState	ATTRIBUTE	GET	X								
aMPCPMode	ATTRIBUTE	GET	X								
aMPCPLinkID	ATTRIBUTE	GET	X								
aMPCPRemoteMACAddress	ATTRIBUTE	GET	X								
aMPCPRegistrationState	ATTRIBUTE	GET	X								
aMPCPMACCtrlFramesTransmitted	ATTRIBUTE	GET	X								
aMPCPMACCtrlFramesReceived	ATTRIBUTE	GET	X								
aMPCPTxGate	ATTRIBUTE	GET	X								
aMPCPTxRegAck	ATTRIBUTE	GET	X								
aMPCPTxRegister	ATTRIBUTE	GET	X								
aMPCPTxRegRequest	ATTRIBUTE	GET	X								
aMPCPTxReport	ATTRIBUTE	GET	X								
aMPCPRxGate	ATTRIBUTE	GET	X								
aMPCPRxRegAck	ATTRIBUTE	GET	X								
aMPCPRxRegister	ATTRIBUTE	GET	X								
aMPCPRxRegRequest	ATTRIBUTE	GET	X								
aMPCPRxReport	ATTRIBUTE	GET	X								
aMPCPTransmitElapsed	ATTRIBUTE	GET	X								
aMPCPReceiveElapsed	ATTRIBUTE	GET	X								
aMPCPRoundTripTime	ATTRIBUTE	GET	X								
aMPCPDiscoveryWindowsSent	ATTRIBUTE	GET	X								
aMPCPDiscoveryTimeout	ATTRIBUTE	GET	X								
aMPCPMaximumPendingGrants	ATTRIBUTE	GET	X								
acMPCPAdminControl	ACTION		X								
oOAM managed object class (30.3.6)											
aOAMID	ATTRIBUTE	GET		X							

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 68 of 717

Table 30–5—EFM Capabilities *(continued)*

				DTE				MAU		PME		
				Multi-Point Control Protocol Package (Conditional)	Operation Administration Maintenance Package (Conditional)	Optical Multipoint Emulation Package (Conditional)	Optical Multipoint Emulation Monitor Package (Optional)	PCS Code Error Monitor Package (Optional)	Forward Error Correction Package (Conditional)	Basic Package (Mandatory)	PME Aggregation Package (Optional)	10P/2B Package (Mandatory)
	aOAMAdminState	ATTRIBUTE	GET		X							
	aOAMMode	ATTRIBUTE	GET-SET		X							
	aOAMDiscoveryState	ATTRIBUTE	GET		X							
	aOAMRemoteMACAddress	ATTRIBUTE	GET		X							
	aOAMLocalConfiguration	ATTRIBUTE	GET		X							
	aOAMRemoteConfiguration	ATTRIBUTE	GET		X							
	aOAMLocalPDUConfiguration	ATTRIBUTE	GET		X							
	aOAMRemotePDUConfiguration	ATTRIBUTE	GET		X							
	aOAMLocalFlagsField	ATTRIBUTE	GET		X							
	aOAMRemoteFlagsField	ATTRIBUTE	GET		X							
	aOAMLocalRevision	ATTRIBUTE	GET		X							
	aOAMRemoteRevision	ATTRIBUTE	GET		X							
	aOAMLocalState	ATTRIBUTE	GET		X							
	aOAMRemoteState	ATTRIBUTE	GET		X							
	aOAMRemoteVendorOUI	ATTRIBUTE	GET		X							
	aOAMRemoteVendorSpecificInfo	ATTRIBUTE	GET		X							
	aOAMUnsupportedCodesTx	ATTRIBUTE	GET		X							
	aOAMUnsupportedCodesRx	ATTRIBUTE	GET		X							
	aOAMInformationTx	ATTRIBUTE	GET		X							
	aOAMInformationRx	ATTRIBUTE	GET		X							
	aOAMUniqueEventNotificationTx	ATTRIBUTE	GET		X							
	aOAMDuplicateEventNotificationTx	ATTRIBUTE	GET		X							
	aOAMUniqueEventNotificationRx	ATTRIBUTE	GET		X							
	aOAMDuplicateEventNotificationRx	ATTRIBUTE	GET		X							
	aOAMLoopbackControlTx	ATTRIBUTE	GET		X							
	aOAMLoopbackControlRx	ATTRIBUTE	GET		X							
	aOAMVariableRequestTx	ATTRIBUTE	GET		X							
	aOAMVariableRequestRx	ATTRIBUTE	GET		X							
	aOAMVariableResponseTx	ATTRIBUTE	GET		X							
	aOAMVariableResponseRx	ATTRIBUTE	GET		X							
	aOAMOrganizationSpecificTx	ATTRIBUTE	GET		X							
	aOAMOrganizationSpecificRx	ATTRIBUTE	GET		X							

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 69 of 717

Table 30–5—EFM Capabilities *(continued)*

				DTE				MAU		PME		
				Multi-Point Control Protocol Package (Conditional)	Operation Administration Maintenance Package (Conditional)	Optical Multipoint Emulation Package (Conditional)	Optical Multipoint Emulation Monitor Package (Optional)	PCS Code Error Monitor Package (Optional)	Forward Error Correction Package (Conditional)	Basic Package (Mandatory)	PME Aggregation Package (Optional)	10P/2B Package (Mandatory)
	aOAMLocalErrSymPeriodConfig	ATTRIBUTE	GET		X							
	aOAMLocalErrSymPeriodEvent	ATTRIBUTE	GET		X							
	aOAMLocalErrFrameConfig	ATTRIBUTE	GET		X							
	aOAMLocalErrFrameEvent	ATTRIBUTE	GET		X							
	aOAMLocalErrFramePeriodConfig	ATTRIBUTE	GET		X							
	aOAMLocalErrFramePeriodEvent	ATTRIBUTE	GET		X							
	aOAMLocalErrFrameSecsSummaryConfig	ATTRIBUTE	GET		X							
	aOAMLocalErrFrameSecsSummaryEvent	ATTRIBUTE	GET		X							
	aOAMRemoteErrSymPeriodEvent	ATTRIBUTE	GET		X							
	aOAMRemoteErrFrameEvent	ATTRIBUTE	GET		X							
	aOAMRemoteErrFramePeriodEvent	ATTRIBUTE	GET		X							
	aOAMRemoteErrFrameSecsSummaryEvent	ATTRIBUTE	GET		X							
	aFramesLostDueToOAMError	ATTRIBUTE	GET		X							
	acOAMAdminControl	ACTION			X							
oOMPEmulation managed object class (30.3.7)												
	aOMPEmulationID	ATTRIBUTE	GET			X						
	aOMPEmulationType	ATTRIBUTE	GET			X						
	aSLDErrors	ATTRIBUTE	GET			X						
	aCRC8Errors	ATTRIBUTE	GET			X						
	aGoodLLID	ATTRIBUTE	GET				X					
	aONUPONcastLLID	ATTRIBUTE	GET				X					
	aOLTPONcastLLID	ATTRIBUTE	GET				X					
	aBadLLID	ATTRIBUTE	GET				X					
oMAU managed object class (30.5.1)												
	aPCSCodingViolation	ATTRIBUTE	GET					X				
	aFECAbility	ATTRIBUTE	GET						X			
	aFECmode	ATTRIBUTE	GET-SET						X			
	aFECCorrectedBlocks	ATTRIBUTE	GET						X			
	aFECUncorrectableBlocks	ATTRIBUTE	GET						X			
oPAF managed object class (30.11.1)												
	aPAFID	ATTRIBUTE	GET							X		

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 70 of 717

Table 30–5—EFM Capabilities *(continued)*

			DTE				MAU		PME		
			Multi-Point Control Protocol Package (Conditional)	Operation Administration Maintenance Package (Conditional)	Optical Multipoint Emulation Package (Conditional)	Optical Multipoint Emulation Monitor Package (Optional)	PCS Code Error Monitor Package (Optional)	Forward Error Correction Package (Conditional)	Basic Package (Mandatory)	PME Aggregation Package (Optional)	10P/2B Package (Mandatory)
aPhyEnd	ATTRIBUTE	GET							X		
aPHYCurrentStatus	ATTRIBUTE	GET							X		
aPAFSupported	ATTRIBUTE	GET							X		
aPAFAdminState	ATTRIBUTE	GET-SET								X	
aLocalPAFCapacity	ATTRIBUTE	GET								X	
aLocalPMEAvailable	ATTRIBUTE	GET								X	
aLocalPMEAggregate	ATTRIBUTE	GET								X	
aRemotePAFSupported	ATTRIBUTE	GET								X	
aRemotePAFCapacity	ATTRIBUTE	GET								X	
aRemotePMEAggregate	ATTRIBUTE	GET								X	
oPME managed object class (30.11.2)											
aPMEID	ATTRIBUTE	GET									X
aPMEAdminState	ATTRIBUTE	GET-SET									X
aPMEStatus	ATTRIBUTE	GET									X
aPMESNRMgn	ATTRIBUTE	GET									X
aTCCodingViolations	ATTRIBUTE	GET									X
aProfileSelect	ATTRIBUTE	GET-SET									X
aOperatingProfile	ATTRIBUTE	GET									X
aPMEFECCorrectedBlocks	ATTRIBUTE	GET									X
aPMEFECUncorrectableBlocks	ATTRIBUTE	GET									X
Common Attributes Template											
aCMCounter	ATTRIBUTE	GET	X	X	X	X	X	X		X	X

30.3.1.1.20 aFramesWithExcessiveDeferral

Change this subclause as follows:

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 412 counts per second at 10 Mb/s

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 71 of 717

behaviour DEFINED AS:

A count of frames that deferred for an excessive period of time. This counter may only be incremented once per LLC transmission. This counter is incremented when the excessDefer flag is set. The actual update occurs in the LayerMgmtTransmitCounters procedure (5.2.4.2). The contents of this attribute are undefined for MAC entities operating in full duplex mode and also when connected to a PHY utilizing the MAC-PHY Rate Matching defined in 61.2.1.1.;

Insert the following after subclause 30.3.1.1.34 aRateControlStatus:

30.3.1.1.35 aDeferControlAbility

ATTRIBUTE

APPROPRIATE SYNTAX:

BOOLEAN

BEHAVIOUR DEFINED AS:

The enumeration "true" is returned when the interframe spacing is accomplished within the MAC sublayer (see 4A.2.3.2.3), the enumeration "false" is returned otherwise.;

30.3.1.1.36 aDeferControlStatus

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has one of the following entries:

unknown	defer control mode unknown
defer control off	defer control mode disabled
defer control on	defer control mode enabled

BEHAVIOUR DEFINED AS:

A GET operation returns the current Defer Control mode of operation of the MAC. A SET operation changes the mode of operation of the MAC sublayer to the indicated value. A SET operation shall have no effect on a device whose mode cannot be changed through management or that can only operate in a single mode.

This attribute maps to the variable deferenceMode (see 4A.2.7.2).;

30.3.2.1.2 aPhyType

Change this subclause as follows (as modified by IEEE Std 802.3ae-2002):

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has one of the following entries:

other	Undefined
unknown	Initializing, true state or type not yet known
none	MII present and nothing connected
2BASE-TL	Clause 61 0.5 Mb/s to 5.5 Mb/s 64/65-octet
10 Mb/s	Clause 7 10 Mb/s Manchester
10PASS-TS	Clause 61 2.5 Mb/s to 100 Mb/s 64/65-octet
100BASE-T4	Clause 23 100 Mb/s 8B/6T
100BASE-X	Clause 24 or subclause 66.1 100 Mb/s 4B/5B
100BASE-T2	Clause 32 100 Mb/s PAM5X5
1000BASE-X	Clause 36 or subclause 66.2 1000 Mb/s 8B/10B
1000BASE-T	Clause 40 1000 Mb/s 4D-PAM5

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 72 of 717

10GBASE-X	Clause 48 10 Gb/s 4 lane 8B/10B
10GBASE-R	Clause 49 10 Gb/s 64B/66B
10GBASE-W	Clause 49 10 Gb/s 64B/66B and Clause 50 WIS

BEHAVIOUR DEFINED AS:

A read-only value that identifies the PHY type. The enumeration of the type is such that the value matches the clause number of this International Standard that specifies the particular PHY. The value of this attribute maps to the value of aMAUType. The enumeration "none" can only occur in a standard implementation where an MII exists and there is nothing connected. However, the attribute aMIIDetect should be used to determine whether an MII exists or not.;

30.3.2.1.3 aPhyTypeList

Change this subclause as follows (as modified by IEEE Std 802.3ae-2002):

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE that meets the requirements of the description below:

other	Undefined
unknown	Initializing, true state or type not yet known
none	MII present and nothing connected
2BASE-TL	Clause 61 0.5 Mb/s to 5.5 Mb/s 64/65-octet
10 Mb/s	Clause 7 10 Mb/s Manchester
10PASS-TS	Clause 61 2.5 Mb/s to 100 Mb/s 64/65-octet
100BASE-T4	Clause 23 100 Mb/s 8B/6T
100BASE-X	Clause 24 or subclause 66.1 100 Mb/s 4B/5B
100BASE-T2	Clause 32 100 Mb/s PAM5X5
1000BASE-X	Clause 36 or subclause 66.2 1000 Mb/s 8B/10B
1000BASE-T	Clause 40 1000 Mb/s 4D-PAM5
10GBASE-X	Clause 48 10 Gb/s 4 lane 8B/10B
10GBASE-R	Clause 49 10 Gb/s 64B/66B
10GBASE-W	Clause 49 10 Gb/s 64B/66B and Clause 50 WIS

BEHAVIOUR DEFINED AS:

A read-only list of the possible types that the PHY could be, identifying the ability of the PHY. If Clause 28 or Clause 37, Auto-Negotiation, is present, then this attribute will map to the local technology ability or advertised ability of the local device.

NOTE—At 10 Gb/s the ability of the PMD must be taken into account when reporting the possible types that the PHY could be.;

30.3.3.2 aMACControlFunctionsSupported

Change this subclause as follows:

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE that meets the requirements of the description below:

PAUSE	PAUSE command implemented
MPCP	MPCP implemented

BEHAVIOUR DEFINED AS:

A read-write list of the possible MAC Control functions implemented within the device. Each function implemented will have an associated MAC Control Function Entity object class. ~~Currently, the only function defined is the PAUSE command.~~;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 73 of 717

30.3.4 PAUSE entity managed object class

Change this subclause as follows:

This subclause formally defines the behaviours for the oMACControlFunctionEntity ~~oPAUSEEntity~~ managed object class attributes.

Insert the following new subclauses after 30.3.4.3

30.3.5 MPCP managed object class

This subclause formally defines the behaviours for the oMPCP managed object class attributes and actions.

30.3.5.1 MPCP Attributes

30.3.5.1.1 aMPCPID

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

The value of aMPCPID is assigned so as to uniquely identify an MPCP entity among the subordinate managed objects of the containing object.;

30.3.5.1.2 aMPCPAdminState

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:
enabled
disabled

BEHAVIOUR DEFINED AS:

A read-only value that identifies the operational state of the Multi-Point MAC Control sublayer. An interface which can provide the Multi-Point MAC Control sublayer functions specified in Clause 64 will be enabled to do so when this attribute has the enumeration “enabled”. When this attribute has the enumeration “disabled” the interface will act as it would if it had no Multi-Point MAC Control sublayer. The operational state of the Multi-Point MAC Control sublayer can be changed using the acMPCPAdminControl action.;

30.3.5.1.3 aMPCPMode

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:
OLT
ONU

BEHAVIOUR DEFINED AS:

A read-only value that identifies the operational mode of the Multi-Point MAC Control sublayer. An interface which can provide the Multi-Point MAC Control sublayer functions specified in Clause 64 will operate as an OLT when this attribute has the enumeration “OLT”. When this attribute has the enumeration “ONU” the interface will act as an ONU.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 74 of 717

30.3.5.1.4 aMPCPLinkID

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A read-only value that identifies the Logical Link identity (LLID) associated with the MAC port as specified in 65.1.2.3.2.;

30.3.5.1.5 aMPCPRemoteMACAddress

ATTRIBUTE

APPROPRIATE SYNTAX:
MACAddress

BEHAVIOUR DEFINED AS:
A read-only value that identifies the source_address parameter of the last MPCPDU passed to MAC Control.

This value is updated on reception of a valid frame with (1) a destinationField equal to the reserved multicast address for MAC Control specified in 31A, (2) lengthOrType field value equal to the reserved Type for MAC Control as specified in 31A, (3) an opcode value reserved for one of MPCP messages, as specified in 31A.;

30.3.5.1.6 aMPCPRegistrationState

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:

unregistered	unregistered
registering	registering with link-partner
registered	registered with a link-partner

BEHAVIOUR DEFINED AS:
A read-only value that identifies the operational state of an individual instance of Multi-Point MAC Control. When this attribute has the enumeration “unregistered” the interface is ready for registering a link partner. When this attribute has the enumeration “registering” the interface is in the process of registering a link-partner. When this attribute has the enumeration “registered” the interface has an established and operational link-partner.

NOTE—This attribute may be used by layer management mechanisms or OAM client to obtain the status of logical links in P2MP networks. Specifically, in implementations where the OAM sublayer is interfaced with Multi-Point MAC Control, theOAM_CTRL.request
(local_link_status) primitive specified in 57.2.5.3 should be mapped to this attribute as follows:

When the value of this attribute changes from “registering” to “registered”, an OAM_CTRL.request primitive with parameter local_link_status = OK is generated.

When the value of this attribute changes from “registered” to “unregistered”, an OAM_CTRL.request primitive with parameter local_link_status = FAIL is generated.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 75 of 717

30.3.5.1.7 aMPCPMACCtrlFramesTransmitted

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of MPCP frames passed to the MAC sublayer for transmission.

Increment counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating an MPCP frame.;

30.3.5.1.8 aMPCPMACCtrlFramesReceived

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of MPCP frames passed by the MAC sublayer to the MAC Control sublayer.

Increment counter by one when a ReceiveFrame function call returns a valid frame with: (1) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, and (2) an opcode indicating an MPCP frame.;

30.3.5.1.9 aMPCPTxGate

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a GATE MPCP frames transmission occurs.

Increment the counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating a GATE MPCPDU.;

30.3.5.1.10 aMPCPTxRegAck

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER_ACK MPCP frames transmission occurs.

Increment the counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating a REGISTER_ACK MPCPDU.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 76 of 717

30.3.5.1.11 aMPCPTxRegister

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER MPCP frames transmission occurs.

Increment the counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating a REGISTER MPCPDU.;

30.3.5.1.12 aMPCPTxRegRequest

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER_REQ MPCP frames transmission occurs.

Increment the counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating a REGISTER_REQ MPCPDU.;

30.3.5.1.13 aMPCPTxReport

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REPORT MPCP frames transmission occurs.

Increment the counter by one when a MA_CONTROL.request service primitive is generated within the MAC Control sublayer with an opcode indicating a REPORT MPCPDU.;

30.3.5.1.14 aMPCPRxGate

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a GATE MPCP frames reception occurs.

Increment the counter by one when a ReceiveFrame function call returns a valid frame with: (1) a destinationField equal to the reserved multicast address for MAC Control specified in 31A, or unique physical address associated with this station, (2) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, (3) an opcode indicating a GATE MPCPDU.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 77 of 717

30.3.5.1.15 aMPCPRxRegAck

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER_ACK MPCP frames reception occurs.

Increment the counter by one when a ReceiveFrame function call returns a valid frame with: (1) a destinationField equal to the reserved multicast address for MAC Control specified in 31A, (2) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, (3) an opcode indicating a REGISTER_ACK MPCPDU.;

30.3.5.1.16 aMPCPRxRegister

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER MPCP frames reception occurs.

Increment the counter by one when a ReceiveFrame function call returns a valid frame with: (1) a destinationField equal to the unique physical address associated with this station, (2) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, (3) an opcode indicating a REGISTER MPCPDU.;

30.3.5.1.17 aMPCPRxRegRequest

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REGISTER_REQ MPCP frames reception occurs.

Increment the counter by one when a ReceiveFrame function call returns a valid frame with: (1) a destinationField equal to the reserved multicast address for MAC Control specified in 31A, (2) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, (3) an opcode indicating a REGISTER_REQ MPCPDU.;

30.3.5.1.18 aMPCPRxReport

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of the number of times a REPORT MPCP frames reception occurs.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 78 of 717

Increment the counter by one when a ReceiveFrame function call returns a valid frame with: (1) a destinationField equal to the reserved multicast address for MAC Control specified in 31A, (2) a lengthOrType field value equal to the reserved Type for 802.3_MAC_Control as specified in 31.4.1.3, (3) an opcode indicating a REPORT MPCPDU.;

30.3.5.1.19 aMPCPTransmitElapsed

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A read-only value that reports the interval from last MPCP frame transmission in increments of 16 ns. The value returned shall be (interval from last MPCP frame transmission in ns)/16, where this value exceeds (2^{32}–1) the value (2^{32}–1) shall be returned.;

30.3.5.1.20 aMPCPReceiveElapsed

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A read-only value that reports the interval from last MPCP frame reception in increments of 16 ns. The value returned shall be (interval from last MPCP frame reception in ns)/16, where this value exceeds (2^{32}–1) the value (2^{32}–1) shall be returned.;

30.3.5.1.21 aMPCPRoundTripTime

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A read-only value that reports the MPCP round trip time in increments of 16 ns. The value returned shall be (round trip time in ns)/16, where this value exceeds (2^{16}–1) the value (2^{16}–1) shall be returned. This value is only defined for an OLT. The contents of this attribute are undefined for an ONU.;

30.3.5.1.22 aMPCPDiscoveryWindowsSent

ATTRIBUTE

APPROPRIATE SYNTAX:
Generalized nonresettable counter. This counter has a maximum increment rate of 10 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:
A count of discovery windows generated. The counter is incremented by one for each generated discovery window.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 79 of 717

30.3.5.1.23 aMPCPDiscoveryTimeout

ATTRIBUTE

APPROPRIATE SYNTAX:
Generalized nonresettable counter. This counter has a maximum increment rate of 10 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:
A count of the number of times a discovery time-out occurs. The counter is incremented by one for each discovery processing state machine reset resulting from time-out waiting for message arrival.;

30.3.5.1.24 aMPCPMaximumPendingGrants

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A read-only value that indicates the maximum number of grants an ONU can store. The maximum number of grants an ONU can store has a range of 0 to 255.;

30.3.5.2 MPCP Actions

30.3.5.2.1 acMPCPAdminControl

ACTION

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:
enabled
disabled

BEHAVIOUR DEFINED AS:
This action provides a means to alter aMPCPAdminState.;

30.3.6 OAM object class

This subclause formally defines the behaviours for the oOAM managed object class attributes.

30.3.6.1 OAM Attributes

30.3.6.1.1 aOAMID

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of aOAMID is assigned so as to uniquely identify an OAM entity among the subordinate managed objects of the containing object.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 80 of 717

30.3.6.1.2 aOAMAdminState

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:
enabled
disabled

BEHAVIOUR DEFINED AS:
A read-only value that identifies the operational state of the OAM sublayer.

An interface which can provide the OAM sublayer functions specified in Clause 57 will be enabled to do so when this attribute has the enumeration “enabled”. When this attribute has the enumeration “disabled” the interface will act as it would if it had no OAM sublayer. The operational state of the OAM sublayer can be changed using the acOAMAdminControl action.;

30.3.6.1.3 aOAMMode

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has one of the following entries:

passive	passive OAM mode
active	active OAM mode

BEHAVIOUR DEFINED AS:
A GET operation returns the current mode of the OAM sublayer entity (see 57.2.9), either “passive” or “active.” A SET operation changes the mode of operation of the OAM entity to the indicated value. A SET operation shall have no effect on a device whose mode cannot be changed through management or that can only operate in a single mode.;

30.3.6.1.4 aOAMDiscoveryState

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has one of the following entries:
link fault
active send local
passive wait
send local remote
send local remote ok
send any

BEHAVIOUR DEFINED AS:
A read-only value that identifies the current state of the OAM Discovery function. The enumerations match the states within the Discovery state diagram Figure 57–5.;

30.3.6.1.5 aOAMRemoteMACAddress

ATTRIBUTE

APPROPRIATE SYNTAX:
MACAddress

BEHAVIOUR DEFINED AS:
The value of the source_address parameter of the last OAMPDU passed by the OAM subordinate sublayer to the OAM sublayer.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 81 of 717

This value is updated on reception of a valid frame with (1) a destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3.;

30.3.6.1.6 aOAMLocalConfiguration

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (5)]

BEHAVIOUR DEFINED AS:
A string of five bits corresponding to the OAM Configuration field (see Table 57–8) in the most recently transmitted Information OAMPDU.;

The first bit corresponds to the OAM Mode bit in the OAM Configuration field. The second bit corresponds to the Unidirectional Support bit in the OAM Configuration field. The third bit corresponds to the Remote Loopback Support bit in the OAM Configuration field. The fourth bit corresponds to the Link Events bit in the OAM Configuration field. The fifth bit corresponds to the Variable Retrieval bit in the OAM Configuration field.;

30.3.6.1.7 aOAMRemoteConfiguration

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (5)]

BEHAVIOUR DEFINED AS:
A string of five bits corresponding to the OAM Configuration field (see Table 57–8) in the most recently received Information OAMPDU.

The first bit corresponds to the OAM Mode bit in the OAM Configuration field. The second bit corresponds to the Unidirectional Support bit in the OAM Configuration field. The third bit corresponds to the Remote Loopback Support bit in the OAM Configuration field.The fourth bit corresponds to the Link Events bit in the OAM Configuration field. The fifth bit corresponds to the Variable Retrieval bit in the OAM Configuration field.

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAM code equals the OAM Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.8 aOAMLocalPDUConfiguration

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
An eleven bit value corresponding to the Maximum OAMPDU Size value within the OAMPDU Configuration field (see Table 57–9) in the most recently transmitted OAMPDU.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 82 of 717

30.3.6.1.9 aOAMRemotePDUConfiguration

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
An eleven bit value corresponding to the Maximum OAMPDU Size value within the OAMPDU Configuration field (see Table 57–9) in the most recently received Information OAMPDU.

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAM code equals the OAM Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.10 aOAMLocalFlagsField

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (7)]

BEHAVIOUR DEFINED AS:
A string of seven bits corresponding to the Flags field (see Table 57–3) in the most recently transmitted OAMPDU.

The first bit corresponds to the Link Fault bit in the Flags field. The second bit corresponds to the Dying Gasp bit in the Flags field. The third bit corresponds to the Critical Event bit in the Flags field. The fourth bit corresponds to the Local Evaluating bit in the Flags field. The fifth bit corresponds to the Local Stable bit in the Flags field. The sixth bit corresponds to the Remote Evaluating bit in the Flags field. The seventh bit corresponds to the Remote Stable bit in the Flags field.;

30.3.6.1.11 aOAMRemoteFlagsField

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (7)]

BEHAVIOUR DEFINED AS:
A string of seven bits corresponding to the Flags field (see Table 57–3) in the most recently received OAMPDU.

The first bit corresponds to the Link Fault bit in the Flags field. The second bit corresponds to the Dying Gasp bit in the Flags field. The third bit corresponds to the Critical Event bit in the Flags field. The fourth bit corresponds to the Local Evaluating bit in the Flags field. The fifth bit corresponds to the Local Stable bit in the Flags field. The sixth bit corresponds to the Remote Evaluating bit in the Flags field. The seventh bit corresponds to the Remote Stable bit in the Flags field.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 83 of 717

This value is updated on reception of a valid frame with (1) a destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAM code equals one of the codes as specified in Table 57–4.;

30.3.6.1.12 aOAMLocalRevision

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of the Revision field (Table 57–10) in the Local Information TLV of the most recently transmitted Information OAMPDU.;

30.3.6.1.13 aOAMRemoteRevision

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of the Revision field (Table 57–10) in the Local Information TLV of the most recently received Information OAMPDU.

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equal to the Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.14 aOAMLocalState

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (3)]

BEHAVIOUR DEFINED AS:
A string of three bits corresponding to the State field (see Table 57–7) of the most recently transmitted Information OAMPDU. The first and second bits corresponds to the Parser Action bits in the State field. The third bit corresponds to the Multiplexer Action bit in the State field.;

30.3.6.1.15 aOAMRemoteState

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (3)]

BEHAVIOUR DEFINED AS:
A string of three bits corresponding to the State field (see Table 57–7) of the most recently received Information OAMPDU. The first and second bits corresponds to the Parser Action bits in the State field. The third bit corresponds to the Multiplexer Action bit in the State field.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 84 of 717

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equal to the Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.16 aOAMRemoteVendorOUI

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of the OUI variable in the Vendor Identifier field (see Table 57–11) of the most recently received Information OAMPDU.

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) a OAMPDU code equal to the Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.17 aOAMRemoteVendorSpecificInfo

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of the Vendor Specific Information field (see Table 57–11) of the most recently received Information OAMPDU.

This value is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equal to the Information code as specified in Table 57–4, (5) the frame contains a Local Information TLV (see 57.5.2.2).;

30.3.6.1.18 aOAMUnsupportedCodesTx

ATTRIBUTE

APPROPRIATE SYNTAX:
Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:
A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that are not supported by the device. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAM code for a function that is not supported by the device.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 85 of 717

30.3.6.1.19 aOAMUnsupportedCodesRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs received that contain an OAM code from Table 57–4 that are not supported by the device. This counter is incremented on reception of a valid frame with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) an OAMPDU code for a function that is not supported by the device.;

30.3.6.1.20 aOAMInformationTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the OAM Information code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAMPDU code indicating an Information OAMPDU.;

30.3.6.1.21 aOAMInformationRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2

BEHAVIOUR DEFINED AS:

A count of OAMPDUs received that contain the OAM Information code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the OAM Information code and is supported by the device.;

30.3.6.1.22 aOAMUniqueEventNotificationTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Event Notification code specified in Table 57–4. This counter is incremented when a

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 86 of 717

CTL:OAMI.request service primitive is generated within the OAM sublayer, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Event Notification code, (5) the Sequence Number field is not equal to the Sequence Number field of the last transmitted Event Notification OAMPDU.;

30.3.6.1.23 aOAMDuplicateEventNotificationTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Event Notification code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Event Notification code, (5) the Sequence Number field is equal to the Sequence Number field of the last transmitted Event Notification OAMPDU.;

30.3.6.1.24 aOAMUniqueEventNotificationRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of the OAMPDUs received that contain the Event Notification code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Event Notification code, (5) the Sequence Number field is not equal to the Sequence Number field of the last received Event Notification OAMPDU and is supported by the device.;

30.3.6.1.25 aOAMDuplicateEventNotificationRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of the OAMPDUs received that contain the Event Notification code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2)

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 87 of 717

lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Event Notification code, (5) the Sequence Number field is equal to the Sequence Number field of the last received Event Notification OAMPDU.;

30.3.6.1.26 aOAMLoopbackControlTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Loopback Control code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAM code indicating a Loopback Control OAMPDU.;

30.3.6.1.27 aOAMLoopbackControlRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs received that contain the Loopback Control code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Loopback Control code and is supported by the device.;

30.3.6.1.28 aOAMVariableRequestTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Variable Request code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAM code indicating a Variable Request OAMPDU.;

30.3.6.1.29 aOAMVariableRequestRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs received that contain the Variable Request code specified in Table 57–4.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 88 of 717

This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Variable Request code and is supported by the device.;

30.3.6.1.30 aOAMVariableResponseTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Variable Response code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAM code indicating a Variable Response OAMPDU.;

30.3.6.1.31 aOAMVariableResponseRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of OAMPDUs received that contain the Variable Response code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Variable Response code and is supported by the device.;

30.3.6.1.32 aOAMOrganizationSpecificTx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

A count of Organization Specific OAMPDUs passed to the OAM subordinate sublayer for transmission that contain the Organization Specific code specified in Table 57–4. This counter is incremented when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAM code indicating an Organization Specific OAMPDU.;

30.3.6.1.33 aOAMOrganizationSpecificRx

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of Slow_Protocol_Frames as defined in 43B.2.

BEHAVIOUR DEFINED AS:

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 89 of 717

A count of OAMPDUs received that contain the Organization Specific code specified in Table 57–4. This counter is incremented on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) a Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) the OAMPDU code equals the Organization Specific code and is supported by the device.;

30.3.6.1.34 aOAMLocalErrSymPeriodConfig

ATTRIBUTE

APPROPRIATE SYNTAX:
A SEQUENCE of two instances of the type INTEGER

BEHAVIOUR DEFINED AS:
The first integer is an eight-octet value indicating the duration of the Errored Symbol Period Event (see 57.5.3.1) window, in terms of symbols.
The second integer is an eight-octet value indicating the number of errored symbols in the period that must be met or exceeded in order for the Errored Symbol Period Event to be generated.;

30.3.6.1.35 aOAMLocalErrSymPeriodEvent

ATTRIBUTE

APPROPRIATE SYNTAX:
A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Symbol Window field
The third INTEGER represents the Errored Symbol Threshold field
The fourth INTEGER represents the Errored Symbols field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:
A sequence of six integers corresponding to the respective fields in the most recently transmitted Errored Symbol Period Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4 and Event TLV Type field equal to the Errored Symbol Period Event value as specified in Table 57–12.;

30.3.6.1.36 aOAMLocalErrFrameConfig

ATTRIBUTE

APPROPRIATE SYNTAX:
A SEQUENCE of two instances of the type INTEGER

BEHAVIOUR DEFINED AS:
The first integer is a two-octet value indicating the duration of the Errored Frame Event (see 57.5.3.2) window, in terms of number of 100 ms intervals. The second integer is a four-octet value indicating the number of errored frames in the period that must be met or exceeded in order for the Errored Frame Event to be generated.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 90 of 717

30.3.6.1.37 aOAMLocalErrFrameEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Window field
The third INTEGER represents the Errored Frame Threshold field
The fourth INTEGER represents the Errored Frames field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently transmitted Errored Frame Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4 and Event TLV Type field equal to the Errored Frame Event value as specified in Table 57–12.;

30.3.6.1.38 aOAMLocalErrFramePeriodConfig

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of two instances of the type INTEGER

BEHAVIOUR DEFINED AS:

The first integer is a four-octet value indicating the duration of the Errored Frame Period Event (see 57.5.3.3) window, in terms of the number of frames in the window.

The second integer is a four-octet value indicating the number of errored frames in the period that must be met or exceeded in order for the Errored Frame Period Event to be generated.;

30.3.6.1.39 aOAMLocalErrFramePeriodEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Window field
The third INTEGER represents the Errored Frame Threshold field
The fourth INTEGER represents the Errored Frames field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently transmitted Errored Frame Period Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4 and Event TLV Type field equal to the Errored Frame Period Event value as specified in Table 57–12.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 91 of 717

30.3.6.1.40 aOAMLocalErrFrameSecsSummaryConfig

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of two instances of the type INTEGER

BEHAVIOUR DEFINED AS:

The first integer is a two-octet value indicating the duration of the Errored Frame Seconds Summary Event (see 57.5.3.4) window, in terms of number of 100 ms intervals. The second integer is a two-octet value indicating the number of errored frame seconds in the period that must be met or exceeded in order for the Errored Frame Seconds Summary Event to be generated.;

30.3.6.1.41 aOAMLocalErrFrameSecsSummaryEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Seconds Summary Window field
The third INTEGER represents the Errored Frame Seconds Summary Threshold field
The fourth INTEGER represents the Errored Frame Seconds Summary field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently transmitted Errored Frame Seconds Summary Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated when a CTL:OAMI.request service primitive is generated within the OAM sublayer with an OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4 and Event TLV Type field equal to the Errored Frame Seconds Summary Event value as specified in Table 57–12.;

30.3.6.1.42 aOAMRemoteErrSymPeriodEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Symbol Window field
The third INTEGER represents the Errored Symbol Threshold field
The fourth INTEGER represents the Errored Symbols field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently received Errored Symbol Period Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4, (5) an Event TLV Type field equal to the Errored Symbol Period Event value as specified in Table 57–12.

If more than one Event TLV of the same Event Type is present within an Event Notification OAMPDU, the Event with the most recent timestamp should be used.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 92 of 717

30.3.6.1.43 aOAMRemoteErrFrameEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Window field
The third INTEGER represents the Errored Frame Threshold field
The fourth INTEGER represents the Errored Frames field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently received Errored Frame Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4, (5) an Event TLV Type field equal to the Errored Frame Event value as specified in Table 57–12.

If more than one Event TLV of the same Event Type is present within an Event Notification OAMPDU, the Event with the most recent timestamp should be used.;

30.3.6.1.44 aOAMRemoteErrFramePeriodEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Window field
The third INTEGER represents the Errored Frame Threshold field
The fourth INTEGER represents the Errored Frames field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently received Errored Frame Period Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4, (5) an Event TLV Type field equal to the Errored Frame Period Event value as specified in Table 57–12.

If more than one Event TLV of the same Event Type is present within an Event Notification OAMPDU, the Event with the most recent timestamp should be used.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 93 of 717

30.3.6.1.45 aOAMRemoteErrFrameSecsSummaryEvent

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of six instances of the type INTEGER
The first INTEGER represents the Event Time Stamp field
The second INTEGER represents the Errored Frame Seconds Summary Window field
The third INTEGER represents the Errored Frame Seconds Summary Threshold field
The fourth INTEGER represents the Errored Frame Seconds Summary field
The fifth INTEGER represents the Error Running Total field
The sixth INTEGER represents the Event Running Total field

BEHAVIOUR DEFINED AS:

A sequence of six integers corresponding to the respective fields in the most recently received Errored Frame Seconds Summary Event TLV in an Event Notification OAMPDU (see 57.4.3.2).

This sequence is updated on reception of a valid frame, with (1) destinationField equal to the reserved multicast address for Slow_Protocols specified in Table 43B–1, (2) lengthOrType field value equal to the reserved Type for Slow_Protocols as specified in Table 43B–2, (3) Slow_Protocols subtype value equal to the subtype reserved for OAM as specified in Table 43B–3, (4) OAMPDU Code field value equal to the Event Notification code as specified in Table 57–4, (5) an Event TLV Type field equal to the Errored Frame Seconds Summary Event value as specified in Table 57–12.

If more than one Event TLV of the same Event Type is present within an Event Notification OAMPDU, the Event with the most recent timestamp should be used.;

30.3.6.1.46 aFramesLostDueToOAMError

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 16 000 counts per second at 10 Mb/s

BEHAVIOUR DEFINED AS:

A count of frames that would otherwise be transmitted by the OAM sublayer, but could not be due to an internal OAM sublayer transmit error. If this counter is incremented, then none of the other counters in this section are incremented. The exact meaning and mechanism for incrementing this counter is implementation dependent.;

30.3.6.2 OAM Actions

30.3.6.2.1 acOAMAdminControl

ACTION

APPROPRIATE SYNTAX:

Same as aPortAdminState

BEHAVIOUR DEFINED AS:

This action provides a means to alter aOAMAdminState.;

30.3.7 OMPEmulation managed object class

This subclause formally defines the behaviours for the oOMPEmulation managed object class attributes.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 94 of 717

30.3.7.1 OMPEmulation Attributes

30.3.7.1.1 aOMPEmulationID

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of aOAMID is assigned so as to uniquely identify an OMPEmulation entity among the subordinate managed objects of the containing object.;

30.3.7.1.2 aOMPEmulationType

ATTRIBUTE

APPROPRIATE SYNTAX:
A ENUMERATION that meets the requirements of the description below:

unknown	initializing, true state or type not yet known
OLT	sublayer operating in OLT mode
ONU	sublayer operating in ONU mode

BEHAVIOUR DEFINED AS:
A read only value that indicates that mode of operation of the Reconciliation Sublayer for Point to Point Emulation (see 65.1.3.1).;

30.3.7.1.3 aSLDErrors

ATTRIBUTE

APPROPRIATE SYNTAX:
Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s

BEHAVIOUR DEFINED AS:
A count of frames received that do not contain a valid SLD field as defined in 65.1.3.3.1.;

30.3.7.1.4 aCRC8Errors

ATTRIBUTE

APPROPRIATE SYNTAX:
Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s

BEHAVIOUR DEFINED AS:
A count of frames received that contain a valid SLD field, as defined in 65.1.3.3.1, but do not pass the CRC-8 check as defined in 65.1.3.3.3.;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 95 of 717

30.3.7.1.5 aGoodLLID

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of frames received that contain a valid SLD field in an OLT, as defined in 65.1.3.3.1, and pass the CRC-8 check, as defined in 65.1.3.3.3.;

30.3.7.1.6 aONUPONcastLLID

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of frames received that contain a valid SLD field in an ONU, as defined in 65.1.3.3.1, passes the CRC-8 check, as defined in 65.1.3.3.3, and the frame meets the rule for acceptance defined in 65.1.3.3.2.;

30.3.7.1.7 aOLTPONcastLLID

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of frames received that contain a valid SLD field in an OLT, as defined in 65.1.3.3.1, passes the CRC-8 check, as defined in 65.1.3.3.3, and the frame meets the rule for acceptance defined in 65.1.3.3.2.;

30.3.7.1.8 aBadLLID

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 500 000 counts per second at 1000 Mb/s.

BEHAVIOUR DEFINED AS:

A count of frames received that contain a valid SLD field in an OLT, as defined in 65.1.3.3.1, and pass the CRC-8 check, as defined in 65.1.3.3.3, but are discarded due to the LLID check as defined in 65.1.3.3.2.;

30.5.1.1.2 aMAUType

Change this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3ak-2004):

ATTRIBUTE

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 96 of 717

APPROPRIATE SYNTAX:

A GET-SET ENUMERATION that meets the requirements of the following description:

global	undefined
other	See 30.2.5
unknown	Initializing, true state or type not yet known
AUI	no internal MAU, view from AUI
2BASE-TL	Voice grade UTP PHY as specified in Clause 61 and 63
10BASE5	Thick coax MAU as specified in Clause 8
FOIRL	FOIRL MAU as specified in 9.9
10BASE2	Thin coax MAU as specified in Clause 10
10BROAD36	Broadband DTE MAU as specified in Clause 11
10BASE-T	UTP MAU as specified in Clause 14, duplex mode unknown
10BASE-THD	UTP MAU as specified in Clause 14, half duplex mode
10BASE-TFD	UTP MAU as specified in Clause 14, full duplex mode
10PASS-TS	Voice grade UTP PHY as specified in Clause 61 and 62
10BASE-FP	Passive fiber MAU as specified in Clause 16
10BASE-FB	Synchronous fiber MAU as specified in Clause 17
10BASE-FL	Asynchronous fiber MAU as specified in Clause 18, duplex mode unknown
10BASE-FLHD	Asynchronous fiber MAU as specified in Clause 18, half duplex mode
10BASE-FLFD	Asynchronous fiber MAU as specified in Clause 18, full duplex mode
100BASE-T4	Four-pair Category 3 UTP as specified in Clause 23
100BASE-TX	Two-pair Category 5 UTP as specified in Clause 25, duplex mode unknown
100BASE-TXHD	Two-pair Category 5 UTP as specified in Clause 25, half duplex mode
100BASE-TXFD	Two-pair Category 5 UTP as specified in Clause 25, full duplex mode
100BASE-BX10D	One single-mode fiber OLT PHY as specified in Clause 58
100BASE-BX10U	One single-mode fiber ONU PHY as specified in Clause 58
100BASE-FX	X fiber over PMD as specified in Clause 26, duplex mode unknown
100BASE-FXHD	X fiber over PMD as specified in Clause 26, half duplex mode
100BASE-FXFD	X fiber over PMD as specified in Clause 26, full duplex mode
100BASE-LX10	Two fiber PHY as specified in Clause 58
100BASE-T2	Two-pair Category 3 UTP as specified in Clause 32, duplex mode unknown
100BASE-T2HD	Two-pair Category 3 UTP as specified in Clause 32, half duplex mode
100BASE-T2FD	Two-pair Category 3 UTP as specified in Clause 32, full duplex mode
1000BASE-X	X PCS/PMA as specified in Clause 36 over undefined PMD, duplex mode unknown
1000BASE-BX10D	One single-mode fiber OLT PHY as specified in Clause 59
1000BASE-BX10U	One single-mode fiber ONU PHY as specified in Clause 59
1000BASE-XHD	X PCS/PMA as specified in Clause 36 over undefined PMD, half duplex mode
1000BASE-XFD	X PCS/PMA as specified in Clause 36 over undefined PMD, full duplex mode
1000BASE-LX	X fiber over long-wavelength laser PMD as specified in Clause 38, duplex mode unknown
1000BASE-LXHD	X fiber over long-wavelength laser PMD as specified in Clause 38, half duplex mode
1000BASE-LXFD	X fiber over long-wavelength laser PMD as specified in Clause 38, full duplex mode
1000BASE-LX10	Two fiber 10 km PHY as specified in Clause 59
1000BASE-PX10D	One single-mode fiber OMP OLT 10 km PHY as specified in Clause 60
1000BASE-PX10U	One single-mode fiber OMP ONU 10 km PHY as specified in Clause 60
1000BASE-PX20D	One single-mode fiber OMP OLT 20 km PHY as specified in Clause 60
1000BASE-PX20U	One single-mode fiber OMP ONU 20 km PHY as specified in Clause 60
1000BASE-SX	X fiber over short-wavelength laser PMD as specified in Clause 38, duplex mode unknown

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 97 of 717

1000BASE-SXHD	X fiber over short-wavelength laser PMD as specified in Clause 38, half duplex mode
1000BASE-SXFD	X fiber over short-wavelength laser PMD as specified in Clause 38, full duplex mode
1000BASE-CX	X copper over 150-Ohm balanced cable PMD as specified in Clause 39, duplex mode unknown
1000BASE-CXHD	X copper over 150-Ohm balanced cable PMD as specified in Clause 39, half duplex mode
1000BASE-CXFD	X copper over 150-Ohm balanced cable PMD as specified in Clause 39, full duplex mode
1000BASE-T	Four-pair Category 5 UTP PHY to be specified in Clause 40, duplex mode unknown
1000BASE-THD	Four-pair Category 5 UTP PHY to be specified in Clause 40, half duplex mode
1000BASE-TFD	Four-pair Category 5 UTP PHY to be specified in Clause 40, full duplex mode
10GBASE-X	X PCS/PMA as specified in Clause 48 over undefined PMD
10GBASE-LX4	X fibre over 4 lane 1310nm optics as specified in Clause 53
10GBASE-CX4	X copper over 8 pair 100-Ohm balanced cable as specified in Clause 54
10GBASE-R	R PCS/PMA as specified in Clause 49 over undefined PMD
10GBASE-ER	R fibre over 1550nm optics as specified in Clause 52
10GBASE-LR	R fibre over 1310nm optics as specified in Clause 52
10GBASE-SR	R fibre over 850nm optics as specified in Clause 52
10GBASE-W	W PCS/PMA as specified in Clauses 49 and 50 over undefined PMD
10GBASE-EW	W fibre over 1550nm optics as specified in Clause 52
10GBASE-LW	W fibre over 1310nm optics as specified in Clause 52
10GBASE-SW	W fibre over 850nm optics as specified in Clause 52
802.9a	Integrated services MAU as specified in IEEE Std 802.9™ ISLAN-16T

BEHAVIOUR DEFINED AS:

Returns a value that identifies the internal MAU type. If an AUI is to be identified to access an external MAU, the type “AUI” is returned. A SET operation to one of the possible enumerations indicated by aMAUTypeList will force the MAU into the new operating mode. If a Clause 22 MII or Clause 35 GMII is present, then this will map to the mode force bits specified in 22.2.4.1. If a Clause 45 MDIO Interface is present, then this will map to the PCS type selection bit(s) in the 10G WIS Control 2 register specified in 45.2.2.6.6, ~~and in~~ the 10G PCS Control 2 register specified in 45.2.3.6.1, ~~and to~~ the PMA/PMD type selection bits in the 10G PMA/PMD Control 2 register specified in 45.2.1.6.1~~.~~, the PMA/PMD control 1 register specified in 45.2.1.1 and the PCS control 1 register 45.2.3.1. If Clause 28 or Clause 37 Auto-Negotiation is operational, then this will change the advertised ability to the single enumeration specified in the SET operation, and cause an immediate link renegotiation. A change in the MAU type will also be reflected in aPHYType.

The enumerations 1000BASE-X, 1000BASE-XHD, 1000BASE-XFD, 10GBASE-X, 10GBASE-R and 10GBASE-W shall only be returned if the underlying PMD type is unknown.;

30.5.1.1.4 aMediaAvailable

Change this subclause as follows (as modified by IEEE Std 802.3ae-2002 and IEEE Std 802.3aj-2003):

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED value list that has the following entries:

other	undefined

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 98 of 717

unknown	initializing, true state not yet known
available	link or light normal, loopback normal
available reduced	link normal, reduced bandwidth, applies only to 2BASE-TL and 10PASS-TS
not available	link loss or low light, no loopback
remote fault	remote fault with no detail
invalid signal	invalid signal, applies only to 10BASE-FB
remote jabber	remote fault, reason known to be jabber
remote link loss	remote fault, reason known to be far-end link loss
remote test	remote fault, reason known to be test
ready	at least one PME available, applies only to 2BASE-TL and 10PASS-TS
offline	offline, applies only to Clause 37 Auto-Negotiation
auto neg error	Auto-Negotiation Error, applies only to Clause 37 Auto-Negotiation
PMD link fault	PMD/PMA receive link fault
WIS frame loss	WIS loss of frame, applies only to 10GBASE-W
WIS signal loss	WIS loss of signal, applies only to 10GBASE-W
PCS link fault	PCS receive link fault
excessive BER	PCS Bit Error Ratio monitor reporting excessive error ratio
DXS link fault	DTE XGXS receive link fault, applies only to XAUI
PXS link fault	PHY XGXS transmit link fault, applies only to XAUI

BEHAVIOUR DEFINED AS:

If the MAU is a 10M b/s link or fiber type (FOIRL, 10BASE-T, 10BASE-F), then this is equivalent to the link test fail state/low light function. For an AUI, 10BASE2, 10BASE5, or 10BROAD36 MAU, this indicates whether or not loopback is detected on the DI circuit. The value of this attribute persists between packets for MAU types AUI, 10BASE5, 10BASE2, 10BROAD36, and 10BASE-FP.

At power-up or following a reset, the value of this attribute will be "unknown" for AUI, 10BASE5, 10BASE2, 10BROAD36, and 10BASE-FP MAUs. For these MAUs loopback will be tested on each transmission during which no collision is detected. If DI is receiving *input* when DO returns to IDL after a transmission and there has been no collision during the transmission, then loopback will be detected. The value of this attribute will only change during noncollided transmissions for AUI, 10BASE2, 10BASE5, 10BROAD36, and 10BASE-FP MAUs.

~~For 100BASE-T2, 100BASE-T4, 100BASE-TX, and 100BASE-FX the enumerations match the states within the respective link integrity state diagrams, Figures 32–17, 23–12 and 24–15.~~ For 100BASE-T2 and 100BASE-T4 PHYs the enumerations match the states within the respective link integrity state diagrams, Figure 32–16 and Figure 23–12. For 100BASE-TX, 100BASE-FX, 100BASE-LX10 and 100BASE-BX10 PHYs the enumerations match the states within the link integrity state diagram Figure 24–15. Any MAU that implements management of Clause 28 Auto-Negotiation will map remote fault indication to MediaAvailable "remote fault." Any MAU that implements management of Clause 37 Auto-Negotiation will map the received RF1 and RF2 bits as specified in Table 37–2, as follows. Offline maps to the enumeration "offline," Link_Failure maps to the enumeration "remote fault" and Auto-Negotiation Error maps to the enumeration "auto neg error."

The enumeration "remote fault" applies to 10BASE-FB remote fault indication, the 100BASE-X far-end fault indication and nonspecified remote faults from a system running Clause 28 Auto-Negotiation. The enumerations "remote jabber~~,~~", "remote link loss~~,~~", or "remote test" should be used instead of "remote fault" where the reason for remote fault is identified in the remote signaling protocol.

Where a Clause 22 MII or Clause 35 GMII is present, a logic one in the remote fault bit (22.2.4.2.11) maps to the enumeration "remote fault," a logic zero in the link status bit (22.2.4.2.13) maps to the enumeration "not available." The enumeration "not available" takes precedence over "remote fault."

For 2BASE-TL and 10PASS-TS PHYs, the enumeration "unknown" maps to the condition where the PHY is initializing, the enumeration "ready" maps to the condition where at least one PME is

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 99 of 717

available and is ready for handshake, the enumeration "available" maps to the condition where, at the PCS, at least one PME is operationally linked, the enumeration "not available" maps to the condition where the PCS is not operationally linked, the enumeration "available reduced" maps to the condition where a link fault is detected at the receive direction by one or more PMEs in the aggregation group and the enumeration "PMD link fault" maps to the condition where a link fault is detected at the receive direction by all of the PMA/PMDs in the aggregation group.
For 10 Gb/s the enumerations map to value of the link_fault variable within the Link Fault Signaling state diagram (Figure 46–9) as follows: the value OK maps to the enumeration "available", the value Local Fault maps to the enumeration "not available" and the value Remote Fault maps to the enumeration "remote fault". The enumeration "PMD link fault", "WIS frame loss", "WIS signal loss", "PCS link fault", "excessive BER" or "DXS link fault" should be used instead of the enumeration "not available" where the reason for the Local Fault state can be identified through the use of the Clause 45 MDIO Interface. Where multiple reasons for the Local Fault state can be identified only the highest precedence error should be reported. This precedence in descending order is as follows: "PXS link fault", "PMD link fault", "WIS frame loss", "WIS signal loss", "PCS link fault", "excessive BER", "DXS link fault". Where a Clause 45 MDIO interface is present a logic zero in the PMA/PMD Receive link status bit (45.2.1.2.2) maps to the enumeration "PMD link fault", a logic one in the LOF status bit (45.2.2.10.4) maps to the enumeration "WIS frame loss", a logic one in the LOS status bit (45.2.2.10.5) maps to the enumeration "WIS signal loss", a logic zero in the PCS Receive link status bit (45.2.3.2.2) maps to the enumeration "PCS link fault", a logic one in the 10GBASE-R PCS Latched high BER status bit (45.2.3.12.2) maps to the enumeration "excessive BER", a logic zero in the DTE XS receive link status bit (45.2.5.2.2) maps to the enumeration "DXS link fault" and a logic zero in the PHY XS transmit link status bit (45.2.4.2.2) maps to the enumeration "PXS link fault".;

30.5.1.1.6 aJabber

Change this subclause as follows (as modified by IEEE Std 802.3ae-2002):

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of two indications. The first, JabberFlag, consists of an ENUMERATED value list that has the following entries:

other	undefined
unknown	initializing, true state not yet known
normal	state is true or normal
fault	state is false, fault, or abnormal

The second, jabberCounter, is a generalized nonresettable counter. This counter has a maximum increment rate of 40 counts per second

BEHAVIOUR DEFINED AS:

If the MAU is in the JABBER state, the jabberFlag portion of the attribute is set to the "fault" value. The jabberCounter portion of the attribute is incremented each time the flag is set to the "fault" value. This attribute returns the value "other" for type AUI. Note that this counter will increment for 10 Mb/s baseband and broadband MAUs only.~~not increment for a 100 Mb/s, 1000 Mb/s, or 10 Gb/s PHY, as there is no defined JABBER state.~~;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 100 of 717

Insert the following new subclauses after 30.5.1.1.11:

30.5.1.1.12 aPCSCodingViolation

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 25 000 000 counts per second for 100 Mb/s implementations and 125 000 000 counts per second for 1000 Mb/s implementations.

BEHAVIOUR DEFINED AS:

For 100 Mb/s operation it is a count of the number of events that cause the PHY to indicate "Data reception with errors" on the MII (see Table 22–2). For 1000 Mb/s operation it is a count of the number of events that cause the PHY to indicate "Data reception error" or "Carrier Extend Error" on the GMII (see Table 35–2). The contents of this attribute is undefined when FEC is operating.;

30.5.1.1.13 aFECAbility

ATTRIBUTE

APPROPRIATE SYNTAX:

A ENUMERATION that meets the requirement of the description below

unknown	initializing, true state not yet known
supported	FEC supported
not supported	FEC not supported

BEHAVIOUR DEFINED AS:

A read-only value that indicates the if the 1000BASE-PX PHY supports the optional FEC Sublayer for forward error correction (see 65.2).

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the FEC capability register (see 45.2.7.2).;

30.5.1.1.14 aFECmode

ATTRIBUTE

APPROPRIATE SYNTAX:

A ENUMERATION that meets the requirement of the description below

unknown	initializing, true state not yet known
disabled	FEC disabled
enabled	FEC enabled

BEHAVIOUR DEFINED AS:

A read-write value that indicates the mode of operation of the 1000BASE-PX PHY optional FEC Sublayer for Forward error correction (see 65.2).

A GET operation returns the current mode of operation the PHY. A SET operation changes the mode of operation of the PHY to the indicated value.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the FEC control register (see 45.2.7.3).;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 101 of 717

30.5.1.1.15 aFECCorrectedBlocks

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second for 10Mb/s implementations and 500 000 counts per second for 1000 Mb/s implementations.

BEHAVIOUR DEFINED AS:

For 10PASS-TS and 1000BASE-PX PHYs, a count of corrected FEC blocks. This counter will not increment for other PHY types.

Increment the counter by one for each received block that is corrected by the FEC function in the PHY.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the FEC corrected blocks counter (see 45.2.7.5).;

30.5.1.1.16 aFECUncorrectableBlocks

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 1 600 000 counts per second for 10Mb/s implementations and 500 000 counts per second for 1000 Mb/s implementations.

BEHAVIOUR DEFINED AS:

For 10PASS-TS and 1000BASE-PX PHYs, a count of uncorrectable FEC blocks. This counter will not increment for other PHY types.

Increment the counter by one for each FEC block that is determined to be uncorrectable by the FEC function in the PHY.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the FEC uncorrectable blocks counter (see 45.2.7.6).;

30.5.1.3.1 nJabber

Change this subclause as follows:

NOTIFICATION

APPROPRIATE SYNTAX:

The same as used for aJabber

BEHAVIOUR DEFINED AS:

The notification is sent whenever a managed 10 Mb/s <u>baseband or broadband</u> MAU enters the JABBER state.;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 102 of 717

Insert the following new subclauses after 30.10.5.2.1

30.11 Layer Management for Physical Medium Entity (PME)

30.11.1 PAF managed object class

This subclause formally defines the behaviours for the oPAF managed object class attributes.

30.11.1.1 PAFAttributes

30.11.1.1.1 aPAFID

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The value of aTCID is assigned so as to uniquely identify a PAF among the subordinate managed objects of the containing object.

30.11.1.1.2 aPhyEnd

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED value that has one of the following entries:

subscriber	subscriber mode of operation
office	office mode of operation

BEHAVIOUR DEFINED AS:
A read-only value that indicates the subtype of the PHY (see 61.1). The enumeration “subscriber” indicates the PHY is operating as a -R subtype, the enumeration “office” indicates the PHY is operating as a -O subtype.;

30.11.1.1.3 aPHYCurrentStatus

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:

noPMEAssigned	no PME assigned in case of PME aggregation
lossOfFraming	one or more PME in aggregation indicates Loss of Framing
lossOfSignal	one or more PME in aggregation indicates Loss of Signal
lossOfPower	one or more PME in aggregation indicates Loss of Power
configInitFailure	configuration initialization failure
noPeerPMEPresent	one or more PME in aggregation indicates no peer PME present
snrMarginViolation	one or more PME in aggregation indicates SNR Margin Violation
lineAttenViolation	one or more PME in aggregation indicates Loop Attenuation Violation

BEHAVIOUR DEFINED AS:
This read-only value indicates the current operational state of the PHY (see 62.3.4.8 and 63.2.2.3).

The enumeration “noPMEAssigned” indicates that the PAF is enabled but that there are no PMEs available for aggregation (no modems assigned), the enumeration “lossOfFraming” indicates one or more PMEs in the aggregation are reporting loss of framing, the enumeration “lossOfSignal” indicates one or more PMEs in the aggregation are reporting loss of signal, the enumeration

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 103 of 717

"lossOfPower" indicates one or more PMEs in the aggregation are reporting loss of power, the enumeration "configInitFailure" indicates configuration initialization failure, the enumeration "noPeerPMEPresent" indicates one or more PMEs in the aggregation are reporting that there was no handshake message/tones send by the remote end during initialization, the enumeration "snrMarginViolation" indicates one or more PMEs in the aggregation are reporting a SNR margin violation and the enumeration "lineAttenViolation" indicates one or more PMEs in the aggregation are reporting a loop attenuation violation.;

30.11.1.1.4 aPAFSupported

ATTRIBUTE

APPROPRIATE SYNTAX:
BOOLEAN

BEHAVIOUR DEFINED AS:
A read-only value that indicates if the TPS-TC supports the PME aggregation function (see 61.2.2). A TPS-TC that can perform PME aggregation on the available PMEs shall return the enumeration "true". A TPS-TC that is incapable of PME aggregation shall return the enumeration "false".

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the PAF available bit in the 10P/2B capability register (see 45.2.3.17.1).;

30.11.1.1.5 aPAFAdminState

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:
enabled
disabled

BEHAVIOUR DEFINED AS:
A read-write value that indicates the state of the PME aggregation function (see 61.2.2). When "disabled", PME aggregation will not be performed, when "enabled", PME aggregation will be performed when the link is Up, even on a single PME. As changing the state of the PME aggregation function is a traffic disruptive operation this can only occur when the link is down.

A GET operation returns the current state of the PME aggregation function. A SET operation changes the state of the PME aggregation function to the indicated value only if the attribute aPAFSupported is "true" and the link is down. If the attribute aPAFSupported is "false", or the link is not down, a SET operation has no effect.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the PAF enable bit in the 10P/2B capability register (see 45.2.3.18.3).;

30.11.1.1.6 aLocalPAFCapacity

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The aLocalPAFCapacity is the number of PMEs that can be aggregated by the PME aggregation function (PAF) of the PHY. Valid range is 1-32. Within each PHY, the PMEs are uniquely numbered in the range from 1 to aLocalPAFCapacity. Some PMEs may not be present in a given PHY instance, in which case the actual number of PMEs present is less than aLocalPAFCapacity. The number of PMEs present is never greater than aLocalPAFCapacity.;

Copyright © 2004 IEEE. All rights reserved.

30.11.1.1.7 aLocalPMEAvailable

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (32)]

BEHAVIOUR DEFINED AS:
A string of bits that indicates which PMEs are currently available for aggregation by the PME aggregation function (PAF) of the PHY (see 61.1.5.3) and therefore reflects the current configuration of PME managed objects within this PAF. The length of the bitstring is "aLocalPAFCapacity" bits. The first bit relates to PME[0]. A "1" in the bitstring indicates the PME is present and is available to the PAF for aggregation. A "0" in the bitstring indicates the PME is absent and not available to the PAF for aggregation.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the 10P/2B PME available register (see 45.2.3.19).;

30.11.1.1.8 aLocalPMEAggregate

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (32)]

BEHAVIOUR DEFINED AS:
A string of bits that indicates which PMEs are in an active aggregation in the PHY. The length of the bitstring is "aLocalPAFCapacity" bits. The first bit relates to PME[0]. A "1" in the bitstring indicates the PME is in an active aggregation. A "0" in the bitstring indicates the PME is not in an active aggregation.

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the 10P/2B PME available registers (see 45.2.3.20).;

30.11.1.1.9 aRemotePAFSupported

ATTRIBUTE

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:

unknown	initializing, true state not yet know
supported	PAF supported
not supported	PAF not supported

BEHAVIOUR DEFINED AS:
A read-only value that indicates if the link-partner PHY supports the PME aggregation function (see 61.2.2). When the link-partner PHY can perform PME aggregation on its available PMEs the enumeration "supported" shall be returned. When the link-partner PHY is incapable of PME aggregation the enumeration "not supported" shall be returned.

If a Clause 45 MDIO Interface to the local PCS is present, then this attribute will map to the Remote PAF supported bit in the 10P/2B capability register (see 45.2.3.17.2).;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 105 of 717

30.11.1.1.10 aRemotePAFCapacity

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
The aRemotePAFCapacity indicates the number of PME that can be aggregated by the PME aggregation function (PAF) of the link-partner PHY. Valid range is 1–32. Within the link-partner PHY, the PMEs are uniquely numbered in the range from 1 to aRemotePAFCapacity. Some PMEs may not be present in a given PHY instance, in which case the actual number of PMEs present is less than aRemotePAFCapacity. The number of PMEs present is never greater than aRemotePAFCapacity.;

30.11.1.1.11 aRemotePMEAggregate

ATTRIBUTE

APPROPRIATE SYNTAX:
BIT STRING [SIZE (32)]

BEHAVIOUR DEFINED AS:
A string of bits that indicates which PMEs are in an active aggregation in the link-partner PHY. The length of the bitstring is "aRemotePAFCapacity" bits. The first bit relates to PME[0]. A "1" in the bitstring indicates the PME is in an active aggregation. A "0" in the bitstring indicates the PME is not in an active aggregation.

If a Clause 45 MDIO Interface to the local PCS is present, then this attribute will map to the 10P/2B PME available registers (see 45.2.6.10).;

30.11.2 PME managed object class

This subclause formally defines the behaviours for the oPME managed object class attributes.

30.11.2.1 PME Attributes

30.11.2.1.1 aPMEID

ATTRIBUTE

APPROPRIATE SYNTAX:
INTEGER

BEHAVIOUR DEFINED AS:
A value unique within the PAF. The value of aPMEID is assigned so as to uniquely identify a PME among the subordinate managed objects of the containing object (oPAF). This value is never greater than aLocalPAFCapacity.;

30.11.2.1.2 aPMEAdminState

APPROPRIATE SYNTAX:
An ENUMERATED VALUE that has the following entries:
enabled
disabled

BEHAVIOUR DEFINED AS:
A read-write value that indicates the state of the PME. The enumeration "disabled" indicates that the PME is disabled, the enumeration "enabled" indicates that the PME is enabled.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 106 of 717

A GET operation returns the current state of the PME. A SET operation changes the state of the PME to the indicated value. The PME is enabled and link initialization initiated when the a SET operation is performed with the value “enabled” when the current value is “disabled”. A SET operation performed with the value “enabled” when the current value is already “enabled” will have shall have no effect.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this attribute will map to the PMA/PMD link control register (see 45.2.1.11.1).;

30.11.2.1.3 aPMEStatus

ATTRIBUTE

APPROPRIATE SYNTAX:

A ENUMERATED VALUE that has the following entries:

down not ready	link is down, not ready
down ready	link is down, ready
initializing	link is initializing
10PASS-TS	link is up as 10PASS-TS
2BASE-TL	link is up as 2BASE-TL

BEHAVIOUR DEFINED AS:

A read-only value that indicates the PME status. The enumeration “not ready” indicates that the link is down and handshake tones are not being received from a link partner, the enumeration “ready” indicates that the link is down and that handshake tones are being received from a link partner, the enumeration “initializing” indicates that the link is initializing, the enumeration “10PASS-TS” indicates that the link is up and the remote PHY is a 10PASS-TS PHY and the enumeration “2BASE-TL” indicates that the link is up and the remote PHY is a 2BASE-TL PHY.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this attribute will map to the PMA/PMD link status register (see 45.2.1.12.4).;

30.11.2.1.4 aPMESNRMgn

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

A read-only value that indicates the PME current signal-to-noise ratio (SNR) Margin (see 62.3.4.7 and 63.2.2.3) with respect to the received signal in increments of dB rounded down to the nearest dB.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this attribute will map to the 10P/2B RX SNR margin register (see 45.2.1.16).;

30.11.2.1.5 aTCCodingViolations

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 19 230 counts per second for 10 Mb/s implementations.

BEHAVIOUR DEFINED AS:

A count of 64/65-octet encapsulation error. Increment the counter by one for each 64/65-octet encapsulation error detected by the 64/65-octet receive function (see Figure 61–19).;

If a Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the TC coding violations register (see 45.2.6.12).;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 107 of 717

30.11.2.1.6 aProfileSelect

ATTRIBUTE

APPROPRIATE SYNTAX:

SEQUENCE of the type INTEGER

BEHAVIOUR DEFINED AS:

A SEQUENCE of read-write values that indicates the operating profile numbers (see 62A.3.7 and 63A.4) of the PME. A 2BASE-TL PME supports a maximum of six values, 10PASS-TS PME can only support one. The operating profile can only be changed in a PME that is operating within a -O PHY subtype (see 61.1). As changing the operating profile is a traffic disruptive operation this can only occur when the link is down.

A GET operation returns the current operating profile number(s). A SET operation changes the operating profile to the indicated profile number only if the attribute aPHYEnd is "office" and the link is down. If the attribute aPHYEnd is "subscriber", or the link is not down, a SET operation has no effect. If all values are zero, the PME operation is defined via the Clause 45 register settings (Table 45–10aa and Table 45–10ab) rather than a specific profile.

NOTE 1– The profile selected by a particular value is different for 10PASS-TS and 2BASE-TL PHY types.

NOTE 2 – For a 2BASE-TL PHY six profiles per region can be chosen for handshake (see 61.4) and the one with the highest data rate will be used.;

30.11.2.1.7 aOperatingProfile

ATTRIBUTE

APPROPRIATE SYNTAX:

A SEQUENCE of two instances, the first instances PMEProfileState is an ENUMERATED VALUE that has the following entries:

no link	link is down
match	link up using a profile
no match	link up not using a profile
activate failure	link activate failure

The second instances is an INTEGER

BEHAVIOUR DEFINED AS:

The ProfileState portion of the attribute is a read-only value that indicates the state of the operating profile. The enumeration "no link" indicates that the link is down, the enumeration "match" indicates that the link is up and achieved operating parameters match a defined complete profile (63A.3 and Table 63A–1), the enumeration "no match" indicates that the link is up but the achieved operating parameters do not match a defined complete profile and the enumeration "activate failure" indicates that the link failed to come up in any of the selected profiles.

The integer portion of the attribute is a read-only value that indicates the operating profile number. This value is only valid when the ProfileState portion of the attribute is "match";

30.11.2.1.8 aPMEFECCorrectedBlocks

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 5000 counts per second for 10Mb/s implementations.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 108 of 717

BEHAVIOUR DEFINED AS:

For a 10PASS-TS PME, a count of corrected FEC blocks. This counter will not increment for other PHY types.

Increment the counter by one for each received block that is corrected by the FEC function in the PME.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this attribute will map to the 10P FEC correctable errors (see 45.2.1.22).;

30.11.2.1.9 aPMEFECUncorrectableBlocks

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 5000 counts per second for 10Mb/s implementations.

BEHAVIOUR DEFINED AS:

For a 10PASS-TS PME, a count of uncorrectable FEC blocks. This counter will not increment for other PME types.

Increment the counter by one for each FEC block that is determined to be uncorrectable by the FEC function in the PME.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this attribute will map to the 10P FEC uncorrectable errors counter (see 45.2.1.23).;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 109 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 110 of 717

45. Management Data Input/Output (MDIO) Interface

45.1 Overview

Change the third paragraph to read:

This extension to the MDIO interface is applicable to ~~Ethernet~~ the following:

- Implementations that operate at speeds of 10 Gb/s and above
- Implementations of 10PASS-TS and 2BASE-TL subscriber network Physical layer devices
- Implementations of 10, 100 or 1000 Mb/s with additional management functions beyond those defined in Clause 22

45.1.2 Application

Change the first sentence of the subclause:

This clause defines a management interface between Station Management (STA) and the sublayers that form a ~~10 Gb/s~~ Physical Layer device (PHY) entity.

45.2 MDIO interface registers

Insert these sentences at the end of the second paragraph:

For 10PASS-TS and 2BASE-TL, control and monitoring of the TC sublayer is defined in the TC MMD. For 10, 100 and 1000 Mb/s PHYs, further management capability is defined in the Clause 22 extension MMD.

Insert two new paragraphs after the second to read:

10PASS-TS and 2BASE-TL each have two port sub-types, 10PASS-TS-O, 10PASS-TS-R, 2BASE-TL-O and 2BASE-TL-R. Hereafter, referred to generically as -O and -R. The -O sub-type corresponds to the port located at the service provider end of a subscriber link (the central office end). The -R sub-type corresponds to the port located at the subscriber end of a subscriber link (the remote end). See 61.1 for more information.

Some register behaviour may differ based on the port sub-type. In the case where a register's behaviour or definition differs between port sub-types, it is noted in the register description and in the bit definition tables (denoted by "O:" and "R:" in the R/W column).

The Clause 22 extension MMD allows new features to be added to 10, 100 and 1000 Mb/s PHYs beyond those already defined in Clause 22.

Insert a new paragraph after the third to read:

In the case of two registers that together form a 32-bit counter, whenever the most significant 16-bit register of the counter is read, the 32-bit counter value is latched into the register pair, the value being latched before the contents of the most significant 16 bits are driven on the MDIO interface and the contents of both registers is cleared to all zeros. A subsequent read from the least significant 16 bit register will return the least significant 16 bits of the latched value, but will not change the contents of the register pair. Writing to these registers has no effect. Counters that adhere to this behaviour are marked in their bit definition tables with the tag "MW = Multi-word".

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 111 of 717

Change Table 45-1 to read:

Table 45–1—MDIO Manageable Device addresses

Device address	MMD name
0	Reserved
1	PMA/PMD
2	WIS
3	PCS
4	PHY XS
5	DTE XS
6 ~~through 29~~	~~Reserved~~ TC
7 through 28	Reserved
29	Clause 22 extension
30	Vendor specific 1
31	Vendor specific 2

Change Figure 45-2:

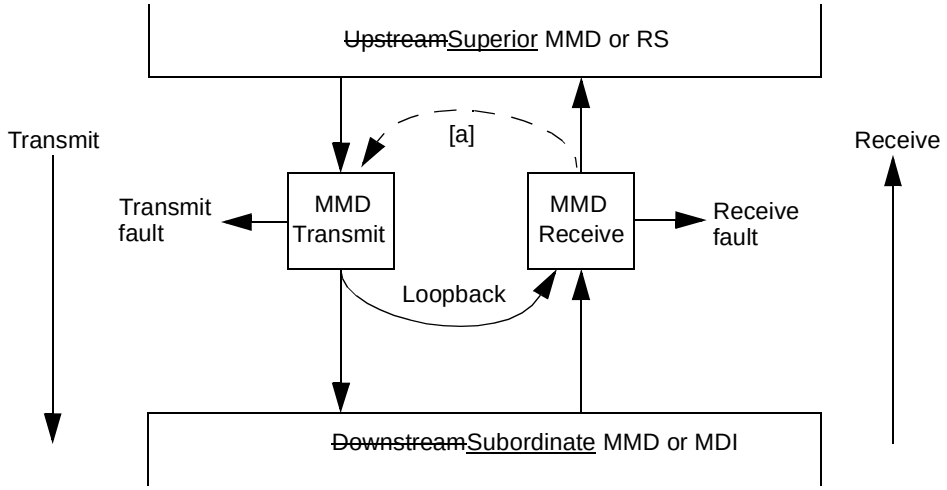


Figure 45–2—MMD signal terminology

[a] Direction of the optional PHY XS loopback

Copyright © 2004 IEEE. All rights reserved.

Insert a new paragraph after the last to read:

Each MMD contains registers 5 and 6, as defined in Table 45–1a. Bits read as a one in this register indicate which MMDs are instantiated within the same package as the MMD being accessed. Bit 5.0 is used to indicate that Clause 22 functionality has been implemented within a Clause 45 electrical interface device. Bit 6.13 indicates that Clause 22 functionality is extended using the Clause 45 electrical interface through MMD 29. The definition of the term package is vendor specific and could be a chip, module, or other similar entity.

Insert the following Table 45–1a after Table 45-1:

Table 45–1a— Devices in package registers bit definitions

Bit(s)[a]	Name	Description	R/W[b]
m.6.15	Vendor specific device 2 present	1 = Vendor specific device 2 present in package 0 = Vendor specific device 2 not present in package	RO
m.6.14	Vendor specific device 1 present	1 = Vendor specific device 1 present in package 0 = Vendor specific device 1 not present in package	RO
m.6.13	Clause 22 extension present	1 = Clause 22 extension present in package 0 = Clause 22 extension not present in package	RO
m.6.12:0	Reserved	Ignore on read	RO
m.5.15:7	Reserved	Ignore on read	RO
m.5.6	TC present	1 = TC present in package 0 = TC not present in package	RO
m.5.5	DTE XS present	1 = DTE XS present in package 0 = DTE XS not present in package	RO
m.5.4	PHY XS present	1 = PHY XS present in package 0 = PHY XS not present in package	RO
m.5.3	PCS present	1 = PCS present in package 0 = PCS not present in package	RO
m.5.2	WIS present	1 = WIS present in package 0 = WIS not present in package	RO
m.5.1	PMD/PMA present	1 = PMA/PMD present in package 0 = PMA/PMD not present in package	RO
m.5.0	Clause 22 registers present	1 = Clause 22 registers present in package 0 = Clause 22 registers not present in package	RO

[a]m = address of MMD accessed (see Table 45–1)
[b]RO = Read Only

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 113 of 717

45.2.1 PMA/PMD registers

Change 802.3ae-2002 Table 45–2 (as modified by 802.3ak-2004) to read:

Table 45–2—PMA/PMD registers

Register address	Register name
1.0	PMA/PMD control 1
1.1	PMA/PMD status 1
1.2, 1.3	PMA/PMD device identifier
1.4	PMA/PMD speed ability
1.5, 1.6	PMA/PMD devices in package
1.7	10G PMA/PMD control 2
1.8	10G PMA/PMD status 2
1.9	10G PMD transmit disable
1.10	10G PMD receive signal detect
1.11	10G PMA/PMD extended ability register
1.12, 1.13	Reserved
1.14, 1.15	PMA/PMD package identifier
1.16 through ~~1.32 767~~1.29	~~Reserved~~
1.30	10P/2B PMA/PMD control
1.31	10P/2B PMA/PMD status
1.32	10P/2B link partner PMA/PMD control[a]
1.33	10P/2B link partner PMA/PMD status[a]
1.34, 1.35	Reserved
1.36	10P/2B link loss counter
1.37	10P/2B RX SNR margin
1.38	10P/2B link partner RX SNR margin[a]
1.39	10P/2B line attenuation
1.40	10P/2B link partner line attenuation[a]
1.41	10P/2B line quality thresholds
1.42	2B link partner line quality thresholds[a]
1.43	10P FEC correctable errors counter
1.44	10P FEC uncorrectable errors counter
1.45	10P link partner FEC correctable errors[a]
1.46	10P link partner FEC uncorrectable errors[a]
1.47	10P electrical length
1.48	10P link partner electrical length[a]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 114 of 717

Table 45–2—PMA/PMD registers *(continued)*

Register address	Register name
1.49	10P PMA/PMD general configuration[a]
1.50	10P PSD configuration[a]
1.51, 1.52	10P downstream data rate configuration[a]
1.53	10P downstream Reed-Solomon configuration[a]
1.54, 1.55	10P upstream data rate[a]
1.56	10P upstream Reed-Solomon configuration[a]
1.57, 1.58	10P tone group
1.59, 1.60, 1.61, 1.62, 1.63	10P tone control parameters[a]
1.64	10P tone control action[a]
1.65, 1.66, 1.67	10P tone status
1.68	10P outgoing indicator bits
1.69	10P incoming indicator bits
1.70	10P cyclic extension configuration
1.71	10P attainable downstream data rate
1.72 through 1.79	Reserved
1.80	2B general parameter
1.81 through 1.88	2B PMD parameters
1.89	2B code violation errors counter
1.90	2B link partner code violation errors[a]
1.91	2B errored seconds counter
1.92	2B link partner errored seconds[a]
1.93	2B severely errored seconds counter
1.94	2B link partner severely errored seconds[a]
1.95	2B LOSW counter
1.96	2B link partner LOSW[a]
1.97	2B unavailable seconds counter
1.98	2B link partner unavailable seconds[a]
1.99	2B state defects
1.100	2B link partner state defects[a]
1.101	2B negotiated constellation
1.102 through 1.109	2B extended PMD parameters
1.110 through 1.32 767	Reserved
1.32 768 through 1.65 535	Vendor specific

[a]Register is defined only for -O port types and is reserved for -R ports

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 115 of 717

45.2.1.1 PMA/PMD control 1 register (Register 1.0)

Change 802.3ae-2002 Table 45–3 read:

Table 45–3—PMA/PMD control 1 register bit definitions

Bit(s)	Name	Description	R/W[a]
1.0.15	Reset	1 = PMA/PMD reset 0 = Normal operation	R/W SC
1.0.14	Reserved	Value always 0, writes ignored	R/W
1.0.13	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
1.0.12	Reserved	Value always 0, writes ignored	R/W
1.0.11	Low power	1 = Low-power mode 0 = Normal operation	R/W
1.0.10:7	Reserved	Value always 0, writes ignored	R/W
1.0.6	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
1.0.5:2	Speed selection	5 4 3 2 1 x x x = Reserved x 1 x x = Reserved x x 1 x = Reserved 0 0 0 1 = 10PASS-TS/2BASE-TL 0 0 0 0 = 10 Gb/s	R/W
1.0.1	Reserved	Value always 0, writes ignored	R/W
1.0.0	PMA loopback	1 = Enable PMA loopback mode 0 = Disable PMA loopback mode	R/W

[a]R/W = Read/Write, SC = Self Clearing

45.2.1.1.3 Speed selection (1.0.13, 1.0.6, 1.05:2)

Insert a new paragraph after the third:

When set to 0001, bits 5:2 select the use of the 10PASS-TS or 2BASE-TL PMA/PMD. More specific mode selection is performed using the 10P/2B PMA control register (45.2.1.11).

45.2.1.1.4 PMA loopback (1.0.0)

Change the second paragraph to read:

The loopback function is mandatory for the 10GBASE-X port type and optional for all other port types, except 2BASE-TL and 10PASS-TS, which do not support loopback. A device's ability to perform the loopback function is advertised in the loopback ability bit of the related speed-dependent status register. A PMA that is unable to perform the loopback function shall ignore writes to this bit and shall return a value of zero when read. For 10 Gb/s operation, the loopback functionality is detailed in 48.3.3 and 51.8, and the loopback ability bit is specified in the 10G PMA/PMD status 2 register.

Copyright © 2004 IEEE. All rights reserved.

45.2.1.2 PMA/PMD status 1 register (Register 1.1)

45.2.1.2.1 Fault (1.1.7)

Insert the following sentence at the end of the paragraph:

For 10PASS-TS or 2BASE-TL operations, when read as a one, a fault has been detected and more detailed information is conveyed in 45.2.1.15, 45.2.1.38, 45.2.1.39, and 45.2.1.54.

45.2.1.2.2 Receive link status (1.1.2)

Insert the following paragraph to the end of the subclause:

While a 10PASS-TS or 2BASE-TL PMA/PMD is initializing, this bit shall indicate receive link down (see 45.2.1.12).

45.2.1.4 PMA/PMD speed ability (Register 1.4)

Change 802.3ae-2002 Table 45–5 to read:

Table 45–5— PMA/PMD speed ability register bit definitions

Bit(s)	Name	Description	R/W[a]
1.4.15:~~1~~3	Reserved for future speeds	Value always 0, writes ignored	RO
1.4.2	10PASS-TS capable	1 = PMA/PMD is capable of operating as 10PASS-TS 0 = PMA/PMD is not capable of operating as 10PASS-TS	RO
1.4.1	2BASE-TL capable	1 = PMA/PMD is capable of operating as 2BASE-TL 0 = PMA/PMD is not capable of operating as 2BASE-TL	RO
1.4.0	10G capable	1 = PMA/PMD is capable of operating at 10 Gb/s 0 = PMA/PMD is not capable of operating at 10 Gb/s	RO

[a]RO = Read Only

Insert the following two subclauses before 802.3ae-2002 45.2.1.4.1. Renumber appropriately

45.2.1.4.1 10PASS-TS capable (1.4.2)

When read as a one, bit 1.4.2 indicates that the PMA/PMD is able to operate as 10PASS-TS. When read as a zero, bit 1.4.2 indicates that the PMA/PMD is not able to operate as 10PASS-TS.

45.2.1.4.2 2BASE-TL capable (1.4.1)

When read as a one, bit 1.4.1 indicates that the PMA/PMD is able to operate as 2BASE-TL. When read as a zero, bit 1.4.1 indicates that the PMA/PMD is not able to operate as 2BASE-TL.

45.2.1.5 PMA/PMD devices in package (Registers 1.5 and 1.6)

Change subclause text to read:

The PMA/PMD devices in package registers are defined in Table 45–1a.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 117 of 717

Delete 802.3ae-2002 Table 45-6.

Insert the following new subclauses and new tables after 45.2.1.11 (as modified by 802.3ak-2004), and renumber the tables accordingly:

45.2.1.11 10P/2B PMA/PMD control register (Register 1.30)

The assignment of bits in the 10P/2B PMA control register is shown in Table 45–10a.

Table 45–10a—10P/2B PMA control register bit definitions

Bit(s)	Name	Description	R/W[a]
1.30.15	PMA/PMD link control	1 = begin initialization, enable link (-R default) 0 = force link down (-O default)	R/W
1.30.14	STFU	Silence the far unit 1 = send silence command 0 = silence command inactive (default)	R/W
1.30.13:8	Silence time	Silence time = 10 × (value of bits + 1) seconds	R/W
1.30.7	Port sub-type select	1 = port operates as an -O sub-type 0 = port operates as a -R sub-type	R/W
1.30.6	Handshake cleardown	1 = send cleardown command 0 = idle (default)	R/W,SC
1.30.5	Ignore incoming hand-shake	1 = PMA/PMD does not respond to handshake tones 0 = PMA/PMD responds to handshake tones	R/W
1.30.4:0	PMA/PMD type selection	3:4 2 1 0 0 0 0 0 = 10PASS-TS PMA/PMD type 0 0 0 1 = 2BASE-TL PMA/PMD type 0 0 1 0 = 2BASE-TL or 10PASS-TS (-R only) 0 0 1 1 = 2BASE-TL preferred, or 10PASS-TS (-O only) 0 1 0 0 = 10PASS-TS preferred, or 2BASE-TL (-O only) all other values are reserved	R/W

[a]R/W = Read/Write, SC = Self Clearing

45.2.1.11.1 PMA/PMD link control (1.30.15)

The STA may enable the PMA/PMD link and initiate link initialization by writing this bit to a one. While link is initializing or up, this bit shall remain a one and writing a one to this bit shall be ignored. The STA may force the link down by writing a zero to this bit. While this bit is set to zero, the PHY shall not send G.994.1 handshake tones. For -O sub-types, upon link drop or MMD reset, the PMA/PMD shall set these bits to zero. For -R sub-types, upon link drop or MMD reset, the PMA/PMD shall set these bits to one.

45.2.1.11.2 STFU (1.30.14)

When this bit is set to a one, the PMA/PMD sends a message to the link partner instructing it to be silent for the silence time (see 45.2.1.11.3). Writing to this bit is valid only when the PMA/PMD link status bits in the PMA/PMD status register (see 45.2.1.12.4) are set to “link is down (ready)”. Writes are otherwise ignored.

This bit clears to zero when the silence command is sent, or upon the execution of an MMD reset.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 118 of 717

45.2.1.11.3 Silence time (1.30.13:8)

The value of these bits sets the silence time conveyed in a STFU operation (see 45.2.1.11.2). The silence time is encoded according to the following formula, where x is the decimal value of the bits:

$$\text{time} = 10 \times (x + 1) \text{ seconds}$$

45.2.1.11.4 Port sub-type select (1.30.7)

This register bit selects the port sub-type for PMA/PMD operation. The bit defaults to a supported mode. The PHY shall ignore writes that select an unsupported mode (see 45.2.1.12).

Changing this bit alters the fundamental operation of the PMA/PMD, therefore, writes to change this bit shall be ignored if the link is up or initializing (see 45.2.1.12.4).

45.2.1.11.5 Handshake cleardown (1.30.6)

Setting this bit to a one shall cause the PMA/PMD to issue a G.994.1 cleardown command to the link partner (see 61.4.3). The PMA/PMD shall clear this bit to zero after the cleardown command has been sent or upon MMD reset. If the PMA/PMD link is not in the “link down (ready)” state (see 45.2.1.12.4), writes to this register shall be ignored.

45.2.1.11.6 Ignore incoming handshake (1.30.5)

When set to a one, the PMA/PMD shall not respond to received handshake tones (see 61.4.3). When set to a zero, the PMA/PMD shall respond to received handshake tones normally, according to 61.4.3 and G.994.1. Upon MMD reset, this bit shall be cleared to zero.

45.2.1.11.7 PMA/PMD type selection (1.30.4:0)

The PMA/PMD type of a 10P/2B PHY may be selected using bits 4 through 0. A PHY shall ignore writes to the type selection bits that select PMA/PMD types it has not advertised in the speed ability register. It is the responsibility of the STA entity to ensure that mutually acceptable port types are applied consistently across all the MMDs on a particular PHY.

A value of 0010 may be set in -R sub-type PMA/PMDs that have both 2BASE-TL and 10PASS-TS capability set in the PMA/PMD speed ability register. The PMA/PMD type of the -R is set upon link initialization by the -O.

Values of 0011 and 0100 may be set in -O sub-type PMA/PMDs that have both 2BASE-TL and 10PASS-TS capabilities set in the PMA/PMD speed ability register. These values indicate whether the -R is set to 10PASS-TS or 2BASE-TL respectively. If the -R is not capable of the “preferred” mode, the -R is set to 10PASS-TS or 2BASE-TL respectively.

The selection is advertised during link initialization G.994 handshake.

The PMA/PMD type selection defaults to a supported ability.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 119 of 717

45.2.1.12 10P/2B PMA/PMD status register (Register 1.31)

The assignment of bits in the 10P/2B PMA/PMD status register is shown in Table 45–10b.

Table 45–10b—10P/2B PMA/PMD status register bit definitions

Bit(s)	Name	Description	R/W[a]
1.31.15:5	Data rate	Current operating bit rate of the PMD n = the value of the bits Data rate = 64n kb/s	RO
1.31.4	CO supported	1 = -O sub-type operation supported 0 = -O sub-type operation not supported	RO
1.31.3	CPE supported	1 = -R sub-type operation supported 0 = -R sub-type operation not supported	RO
1.31.2:0	PMA/PMD link status	2 1 0 0 0 0 = link is Down (not ready) 1 0 0 = link is Down (ready) 0 0 1 = link is Initializing 0 1 0 = link is Up, 10PASS-TS 0 1 1 = link is Up, 2BASE-TL all other values reserved	RO

[a]RO = Read Only

45.2.1.12.1 Data rate (1.31.15:5)

These bits indicate the current bit rate of an operational PMA/PMD link. These bits shall be set to all zeros when the link is down or initializing.

45.2.1.12.2 CO supported (1.31.4)

This bit indicates that the PMA/PMD supports operation as a -O sub-type. This bit is set to a one when the capability is supported and zero otherwise. This bit reflects the signal PMA_PMD_type in 61.3.2.1.

45.2.1.12.3 CPE supported (1.31.3)

This bit indicates that the PMA/PMD supports operation as a -R sub-type. This bit is set to a one when the capability is supported and zero otherwise. This bit reflects the signal PMA_PMD_type in 61.3.2.1.

45.2.1.12.4 PMA/PMD link status (1.31.2:0)

The overall state of the PMA/PMD link is reflected in bits 2:0. After the PMA/PMD is linked to the remote PHY, the PHY shall set these bits to indicate the PMA/PMD port type that is linked (010 for 10PASS-TS and 011 for 2BASE-TL). The corresponding signal, PMA_received_synchronized, is defined in 61.3.2.1.

While the link is initializing, these bits shall be set to 001.

When read as 000, these bits shall indicate that PMA/PMD link is down and the PMA/PMD is not detecting handshake tones from a link partner. This state is known as “not ready”.

When read as 100, these bits shall indicate that the PMA/PMD link is down and the PMA/PMD is detecting handshake tones from a link partner. This state is known as “ready”.

Copyright © 2004 IEEE. All rights reserved.

45.2.1.13 Link Partner PMA/PMD control register (Register 1.32)

The 10PASS-TS-O and 2BASE-TL-O PMA/PMDs allow access to certain register values of their link partner via the local MDIO interface. A summary of link partner parameters that may be sent or retrieved is provided in Table 45–10c.

Table 45–10c—Link partner PMA/PMD registers and PMA/PMD register duals

	Register type	Link partner register	Local register counterpart	
	PHY sub-type	-O	-O	-R
Link partner register name		**Address and access type[a]**		
10P/2B link partner RX SNR margin		1.38 RO	1.37 RO	1.37 RO
10P/2B link partner line attenuation		1.40 RO	1.39 RO	1.39 RO
10P/2B link partner line quality thresholds		1.42 R/W	1.41 R/W	n/a
10P link partner FEC correctable errors		1.45 RO	1.43 RO	1.43 RO
10P link partner FEC uncorrectable errors		1.46 RO	1.44 RO	1.44 RO
10P link partner electrical length		1.48 RO	1.47 RO	1.47 RO
2B link partner code violation errors		1.90 RO	1.89 RO	1.89 RO
2B link partner errored seconds		1.92 RO	1.91 RO	1.91 RO
2B link partner severely errored seconds		1.94 RO	1.93 RO	1.93 RO
2B link partner LOSW		1.96 RO	1.95 RO	1.95 RO
2B link partner unavailable seconds		1.98 RO	1.97 RO	1.97 RO
2B link partner state defects register		1.100 RO	1.99 RO	1.99 RO

[a]R/W = Read/Write, RO = read only, n/a = undefined

The Link partner PMA/PMD control register allows the -O STA to control the transmission and retrieval of parameters from its -R link partner.

The -R STA may read values exchanged by the -O STA in the local register counterpart to the link partner register. For example, the -O 10P link partner electrical length register will be populated with the contents of the -R 10P electrical length register upon a successful “Get link partner parameters” command. Similarly, the -R 10P/2B line quality thresholds register will contain the values sent by the -O in the 10P/2B link partner line quality thresholds register, after a successful “Send link partner parameters” command.

The link partner registers listed in Table 45–10c have the same behaviour upon being read or reset as their local register counterparts.

This register is defined for -O port sub-types only.

Bit definitions for the Link partner PMA/PMD control register are found in Table 45–10d.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 121 of 717

Table 45–10d—Link partner PMA/PMD control register bit definitions

Bits(s)	Name	Description	R/W[a]
1.32.15	Get link partner parameters	1 = get link partner parameters 0 = operation complete, ready	R/W, SC
1.32.14	Reserved	Value always 0, writes ignored	R/W
1.32.13	Send link partner parameters	1 = send link partner parameters 0 = operation complete, ready	R/W, SC
1.32.12:0	Reserved	Value always 0, writes ignored	R/W

[a]R/W = Read/Write, SC = Self Clearing

45.2.1.13.1 Get link partner parameters (1.32.15)

When this bit is set to a one, the -O PHY updates its link partner registers shown in Table 45–10c with values from the link partner. While the operation is in progress, the PHY shall keep the bit set as one. If the "Get link partner parameters" operation does not complete within 10 seconds, its result shall be marked as "failed" (see 45.2.1.14) and the operation marked as "complete". After completion of the operation or upon reset, the PHY shall reset the bit to zero. A write to this bit when link is down shall cause the result to be marked as "failed" and the operation marked as "complete".

45.2.1.13.2 Send link partner parameters (1.32.13)

When this bit is set to a one, the -O PHY sends the contents of the 2B link partner line quality thresholds register (see 45.2.1.20) to the link partner. While the operation is in progress, the PHY shall keep the bit set as one. The "Send Link partner parameters" operation must complete within 10 seconds, or its result shall be marked as "failed" (see 45.2.1.14) and the operation marked as "complete". After completion of the operation or upon reset, the PHY shall reset the bit to zero. A write to this bit when link is down shall cause the result to be marked as "failed" and the operation marked as "complete".

45.2.1.14 Link partner PMA/PMD status register (Register 1.33)

The Link partner PMA/PMD status register reflects the result of the operations that are performed using the Link Partner PMA/PMD control register (1.32).

This register is defined for -O port sub-types only.

Bit definitions for the Link partner PMA/PMD status register are found in Table 45–10e.

Table 45–10e—Link Partner PMA/PMD status register bit definitions

Bits(s)	Name	Description	R/W[a]
1.33.15	Reserved	Value always 0, writes ignored	RO
1.33.14	Get link partner result	1 = operation failed 0 = operation successful	RO, LH
1.33.13	Reserved	Value always 0, writes ignored	RO
1.33.12	Send link partner result	1 = operation failed 0 = operation successful	RO, LH
1.33.11:0	Reserved	Value always 0, writes ignored	RO

[a]RO = Read Only, LH = Latches High

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 122 of 717

45.2.1.14.1 Get link partner result (1.33.14)

After a “Get link partner parameters” operation terminates, this bit reflects the result of the operation. If the operation did not complete successfully, the PHY shall set this bit to a one. Upon being read or a reset, the PHY shall set the bit to zero.

The definition of an unsuccessful “Get link partner parameters” operation is unspecified and left to the implementation.

45.2.1.14.2 Send link partner result (1.33.12)

After a “Send link partner parameters” operation terminates, this bit reflects the result of the operation. If the operation did not complete successfully, the PHY shall set this bit to a one. Upon being read or a reset, the PHY resets the bit to zero.

The definition of an unsuccessful “Send link partner parameters” operation is unspecified and left to the implementation.

45.2.1.15 10P/2B PMA/PMD link loss register (Register 1.36)

The 10P/2B PMA/PMD link loss register is a 16 bit counter that contains the number of times the PMA/PMD link is lost. Link is considered lost when the PMA_receive_synchronized signal (see 61.3.2.1) transitions from up to down. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PMA/PMD link loss register is shown in Table 45–10f.

Table 45–10f—10P/2B PMA/PMD link loss register bit definitions

Bits(s)	Name	Description	R/W[a]
1.36.15:0	Link lost events	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.1.16 10P/2B RX SNR margin register (Register 1.37)

For further information on 2BASE-TL SNR margin, see 63.3. For 10PASS-TS SNR margin, see 62.3.

The bit definitions for the 10P/2B RX SNR margin register are found in Table 45–10g.

Table 45–10g—10P/2B RX SNR margin register bit definition

Bit(s)	Name	Description	R/W[a]
1.37.15:8	Reserved	Value always 0, writes ignored	R/W
1.37.7:0	RX SNR margin	Value of SNR margin in dB	RO

[a]R/W = Read/Write, RO = Read Only

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 123 of 717

45.2.1.17 10P/2B link partner RX SNR margin register (Register 1.38)

The 10P/2B link partner RX SNR margin register provides access to the link partner's receive SNR margin. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10g.

45.2.1.18 10P/2B line attenuation register (Register 1.39)

This register reports the line attenuation as measured by the PMA/PMD. For more information, see the reference documents in 63.3 and 62.3.

The bit definitions for the 10P/2B line attenuation register are found in Table 45–10h.

Table 45–10h—10P/2B line attenuation register bit definitions

Bits(s)	Name	Description	R/W[a]
1.39.15:0	Line attenuation	The value of the line attenuation in dB, as perceived by the local PMD.	RO

[a]RO = Read Only

45.2.1.19 10P/2B link partner line attenuation register (Register 1.40)

The 10P/2B link partner line attenuation register provides access to the link partner's perceived line attenuation margin. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10h.

45.2.1.20 10P/2B line quality thresholds register (Register 1.41)

The 10P/2B line quality thresholds register sets the target environment for the 10PASS-TS/2BASE-TL connection. The line quality is defined by the SNR margin and line attenuation values.

Bit definitions for the 10P/2B line quality threshold register are found in Table 45–10i.

Table 45–10i— 10P/2B line quality thresholds register bit definition

Bit(s)	Name	Description	R/W[a]
1.41.15:8	Loop attenuation threshold	Attenuation threshold in dB	O: R/W R: RO
1.41.7:4	SNR margin threshold	SNR margin threshold in dB	O: R/W R: RO
1.41.3:0	Reserved	Value always 0, writes ignored	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 124 of 717

45.2.1.20.1 Loop attenuation threshold (1.41.15:8)

These bits set the loop attenuation threshold for 2BASE-TL PMA/PMDs. Writing to these bits on a 10PASS-TS PMA/PMD have no effect. The threshold value is in units of dB. For more information on the loop attenuation threshold, see 63.2.2.3.

45.2.1.20.2 SNR margin threshold (1.41.7:4)

These bits set the SNR margin threshold for 10PASS-TS and 2BASE-TL PMA/PMDs. The threshold is expressed in units of dB. For more information of the SNR margin threshold, see 63.2.2.3 for 2BASE-TL and Section 10 of the document referenced in 62.1.3 for 10PASS-TS.

45.2.1.21 2B link partner line quality thresholds register (Register 1.42)

The 2B link partner line quality thresholds register allows the -O STA to set its -R link partner's line quality thresholds. The contents of this register are transmitted to the -R when the STA activates the "Send link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.2).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10i.

45.2.1.22 10P FEC correctable errors counter (Register 1.43)

The 10P FEC correctable errors counter is a 16 bit counter that contains the number of FEC codewords that have been received and corrected. For more information on 10PASS-TS FEC, see 62.2.4.2. These bits shall be reset to all zeroes upon execution of the MMD reset and upon being read. The assignment of bits in the 10P FEC correctable error counter is shown in Table 45–10j.

Table 45–10j—10P FEC correctable errors counter register bit definitions

Bits(s)	Name	Description	R/W[a]
1.43.15:0	Correctable codewords [15:0]	The bytes of the counter	RO

[a]RO = Read Only

45.2.1.23 10P FEC uncorrectable errors counter (Register 1.44)

The 10P FEC uncorrectable errors counter is a 16 bit counter that contains the number of FEC codewords that have been received and are uncorrectable. For more information on 10PASS-TS FEC, see 62.2.4.2. These bits shall be reset to all zeroes upon execution of the MMD reset and upon being read. The assignment of bits in the 10P FEC uncorrectable error counter is shown in Table 45–10k.

Table 45–10k—10P FEC uncorrectable errors counter bit definitions

Bits(s)	Name	Description	R/W[a]
1.44.15:0	Uncorrectable codewords [15:0]	The bytes of the counter	RO

[a]RO = Read Only

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 125 of 717

45.2.1.24 10P link partner FEC correctable errors register (Register 1.45)

The 10P link partner FEC correctable errors register provides the -O STA with a snapshot of the -R link partner's FEC correctable errors counter. Because this register is not a counter, its value will increment only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10j and 45.2.1.22.

45.2.1.25 10P link partner FEC uncorrectable errors register (Register 1.46)

The 10P link partner FEC uncorrectable errors register provides the -O STA a snapshot of the -R link partner's FEC uncorrectable errors counter. Because this register is not a counter, its value will increment only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10k and 45.2.1.23.

45.2.1.26 10P electrical length register (Register 1.47)

The bit definitions for the 10P electrical length register are found in Table 45–10l.

Table 45–10l—10P electrical length register bit definitions

Bits(s)	Name	Description	R/W[a]
1.47.15:0	Electrical length	The electrical length of the medium (in meters), as perceived at the local PMD	RO

[a]RO = Read Only

45.2.1.26.1 Electrical length (1.47.15:0)

After the link is established, these bits contain the measured electrical length (in meters) of the medium as measured by the PMD. If the link is down or the PMD is unable to determine the electrical length, these bits shall be set to all ones (see 62.3.2).

45.2.1.27 10P link partner electrical length register (Register 1.48)

The 10P link partner electrical length register provides access to the link partner's electrical length measurement. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10l and 45.2.1.26.1.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 126 of 717

45.2.1.28 10P PMA/PMD general configuration register (Register 1.49)

The 10P PMA/PMD general configuration register is defined for -O port types only.

The 10P PMA/PMD general configuration register bit definitions are found in Table 45–10m.

Table 45–10m—10P PMA/PMD general configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.49.15:8	Reserved	Value always 0, writes ignored	R/W
1.49.7:0	TX window length	Transmit window length	O: R/W R: undefined

[a]R/W = Read/Write

45.2.1.28.1 TX window length (1.49.7:0)

Bits 7:0 control the PMD transmit window length within the cyclic prefix and suffix in units of number of samples, as defined in 62.3.2.

45.2.1.29 10P PSD configuration register (Register 1.50)

This register is defined for -O port sub-types only.

The 10P PSD configuration register bit definitions may be found in Table 45–10n.

Table 45–10n—10P PSD configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.50.15:9	Reserved	Value always 0, writes ignored	R/W
1.50.8	PBO disable	1 = PBO disabled 0 = PBO normal operation	O: R/W R: undefined
1.50.7:0	Reserved	Value always 0, writes ignored	O: R/W R: undefined

[a]R/W = Read/Write

45.2.1.29.1 PBO disable (1.50.8)

Setting this bit to a one disables UPBO for performance testing purposes. Refer to 62.3.4.4.

45.2.1.30 10P downstream data rate configuration (Registers 1.51, 1.52)

These registers are defined for -O port sub-types only.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 127 of 717

The bit definitions for the 10P downstream data rate configuration registers are found in Table 45–10o.

Table 45–10o—10P downstream data rate configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.51.15:0	Minimum downstream data rate	Sets the minimum required downstream payload data rate M = value of bits Data rate = M × 64000 b/s	O: R/W R: undefined
1.52.15:0	Maximum downstream data rate	Sets the maximum downstream payload data rate M = value of bits Data rate = M × 64000 b/s	O: R/W R: undefined

[a]R/W = Read/Write

45.2.1.31 10P downstream Reed-Solomon configuration (Register 1.53)

This register is defined for -O port sub-types only.

The bit definitions for 10P downstream Reed-Solomon configuration are found in Table 45–10p.

Table 45–10p—10P downstream Reed-Solomon configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.53.15:1	Reserved	Value always 0, writes ignored	O: R/W R: undefined
1.53.0	RS codeword length	1 = codeword length of 144 0 = codeword length of 240	O: R/W R: undefined

[a]R/W = Read/Write

45.2.1.31.1 RS codeword length (1.53.0)

This bit selects the Reed-Solomon forward error correction codeword length used in the downstream direction. For more information, see 62.2.4.2.

45.2.1.32 10P upstream data rate configuration (Registers 1.54, 1.55)

These registers are defined for -O port sub-types only.

The bit definitions for 10P upstream data rate configuration are found in Table 45–10q.

45.2.1.33 10P upstream 10P upstream Reed-Solomon configuration register (Register 1.56)

This register is defined for -O port sub-types only.

The bit definitions for the 10P upstream Reed-Solomon configuration are found in Table 45–10r.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 128 of 717

Table 45–10q—10P upstream data rate configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.54.15:0	Minimum upstream data rate	Sets the required upstream payload data rate M = value of bits Data rate = M × 64000 b/s	O: R/W R: undefined
1.55.15:0	Maximum upstream data rate	Sets the maximum upstream payload data rate M = value of bits Data rate = M × 64000 b/s	O: R/W R: undefined

[a]R/W = Read/Write

Table 45–10r—10P upstream Reed-Solomon configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.56.15:1	Reserved	Value always 0, writes ignored	O: R/W R: undefined
1.56.0	RS codeword length	1 = codeword length = 144 0 = codeword length = 240	O: R/W R: undefined

[a]R/W = Read/Write

45.2.1.33.1 RS codeword length (1.56.0)

This bit selects the Reed-Solomon forward error correction codeword length used in the upstream direction. For more information, see 62.2.4.2.

45.2.1.34 10P tone group registers (Registers 1.57, 1.58)

10PASS-TS operates by modulating 4096 individual tones across the transmission spectrum. Each tone can be assigned a PSD level, desired SNR margin and transmission direction (downstream or upstream). To reduce the complexity of addressing individual tones, tones are addressed by group. The STA sets the lower and upper tones in a group, sets the parameters for that group, and issues a command to activate those parameters for that group. See 62.3.4.7 for details on the mechanism that transfers tone information across the link to and from the -R link partner.

This register allows the STA to specify the range of tones to control. The bit definitions for the 10P tone group register are defined in Table 45–10s.

Table 45–10s—10P tone group register bit definitions

Bit(s)	Name	Description	R/W[a]
1.57.15:0	Lower tone	The number of the lower frequency tone in the group. Valid when ≤ the Upper tone.	R/W
1.58.15:0	Upper tone	The number of the higher frequency tone in the group. Valid when ≥ the Lower tone.	R/W

[a]R/W = Read/Write

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 129 of 717

45.2.1.35 10P tone control parameters (Registers 1.59, 1.60, 1.61, 1.62, 1.63)

These registers allow the STA to specify parameters for the tones selected in the 10P tone group registers. These values do not take effect until the corresponding activation commands are issued in the 10P tone control action register. The bit definitions for the 10P tone control parameters are shown in Table 45–10t.

These registers are defined for -O port sub-types only.

Table 45–10t—10P tone control parameters register bit definitions

Bit(s)	Name	Description	R/W[a]
1.59.15	Tone active	1 = selected tones are active 0 = selected tones are disabled	R/W
1.59.14	Tone direction	1 = selected tones assigned to upstream communication 0 = selected tones assigned to downstream communication	R/W
1.59.13:5	Max SNR margin	Assigns the maximum SNR margin the PMD may achieve M = value of bits Max SNR Margin = M/4 dB	R/W
1.59.4:0	Reserved	Value always 0, writes ignored	R/W
1.60:15:9	Reserved	Value always 0, writes ignored	R/W
1.60.8:0	Target SNR margin	Assigns the target SNR margin for the selected tones M = value of bits Target SNR Margin = M/4 dB	R/W
1.61:15:9	Reserved	Value always 0, writes ignored	R/W
1.61.8:0	Min SNR margin	Assigns the minimum SNR margin for the selected tones M = value of bits Min SNR Margin = M/4 dB	R/W
1.62.15:9	Reserved	Value always 0, writes ignored	R/W
1.62.8:0	PSD level	Assigns a TX PSD level for the selected tones in dBm/Hz P = value of bits (2's complement) PSD Level = P/4 - 100 dBm/Hz	R/W
1.63.15:9	Reserved	Value always 0, writes ignored	R/W
1.63.8:0	USPBO reference	Assigns the level of the USPBO reference at the points represented by the selected tones P = value of bits (2's complement) PSD Level = P/4 - 100 dBm/Hz	R/W

[a]R/W = Read/Write

45.2.1.35.1 Tone active (1.59.15)

These bits are used to control the activity of the selected tones. When the "Change tone activity" command is issued (1.64.4), the selected tones will be either activated or deactivated based on the value set in these bits.

45.2.1.35.2 Tone direction (1.59.14)

These bits are used to control the direction of the selected tones. When the "Change tone direction" command is issued (1.64.3), the selected tones will adopt the direction set in these bits.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 130 of 717

45.2.1.35.3 Max SNR Margin (1.59.13:5)

These bits control the maximum SNR margin for the selected tones. When the “Change SNR margin” command is issued (1.64.2), the PMA/PMD will use the value set in these bits in calculations related to maximum SNR margin. The SNR margin is in units of dB, derived by dividing the value of bits 13:5 by 4.

45.2.1.35.4 Target SNR margin (1.60.8:0)

These bits control the target SNR margin for the selected tones. When the “Change SNR margin” command is issued (1.64.2), the PMA/PMD will use the value set in these bits in calculations related to target SNR margin. The SNR margin is in units of dB, derived by dividing the value of bits 13:5 by 4.

45.2.1.35.5 Minimum SNR margin (1.61.8:0)

These bits control the minimum SNR margin for the selected tones. When the “Change SNR margin” command is issued (1.64.2), the PMA/PMD will use the value set in these bits in calculations related to minimum SNR margin. The SNR margin is in units of dB, derived by dividing the value of bits 13:5 by 4.

45.2.1.35.6 PSD level (1.62.8:0)

These bits control the transmit PSD level of the selected tones. When the “Change PSD level” command is issued (1.64.1), the PMA/PMD will set the PSD level of the selected tones to according to this formula, where x is the value of bits 8:0:

$$power = \frac{x}{4} - 100 \frac{dBm}{Hz} \quad (45–1)$$

45.2.1.35.7 USPBO reference (1.63.8:0)

These bits control the reference level for the upstream power back-off function of the PMA/PMD. When the “Change USPBO reference PSD” command (1.64.0) is issued, the portion of the USPBO reference curve that corresponds to the selected tones is changed to the value specified by these bits. The USPBO reference level is specified according to this formula, where x is the value of bits 8:0:

$$power = \frac{x}{4} - 100 \frac{dBm}{Hz} \quad (45–2)$$

45.2.1.36 10P tone control action register (Register 1.64)

The operations in this register apply to the tones selected in the 10P tone group registers (1.57, 1.58).

This register is defined for -O port sub-types only.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 131 of 717

The bit definitions for the 10P tone control action register are shown in Table 45–10uT

Table 45–10u—10P tone control action register bit definitions

Bit(s)	Name	Description	R/W[a]
1.64.15:6	Reserved	Value always 0, writes ignored	R/W
1.64.5	Refresh tone status	1 = refresh selected tones for the 10P tone status registers 0 = ready, operation complete	R/W, SC
1.64.4	Change tone activity	1 = activate tone active setting as in tone control parameter register 0 = ready, operation complete	R/W, SC
1.64.3	Change tone direction	1 = activate tone direction setting as in tone control parameter register 0 = ready, operation complete	R/W, SC
1.64.2	Change SNR margin	1 = activate min, max and target SNR margin settings as in tone control parameter register 0 = ready, operation complete	R/W, SC
1.64.1	Change PSD level	1 = activate PSD level setting as in tone control parameter register 0 = ready, operation complete	R/W, SC
1.64.0	Change UPBO reference PSD	1 = activate UPBO reference PSD settings as in tone control parameter register 0 = ready, operation complete	R/W, SC

[a]R/W = Read/Write, SC = Self Clearing

45.2.1.36.1 Refresh tone status (1.64.5)

When this bit is set to a one, the tone status information from the local and link partner is gathered so that it may be read using the 10P tone status registers (1.65, 1.66 and 1.67). While the tones are being refreshed, this bit shall remain set as one. This bit shall be reset to zero when the refresh operation is over or upon reset.

NOTE—Refreshing a large number of tones may take a long time to complete.

45.2.1.36.2 Change tone activity (1.64.4)

When this bit is set to a one, the selected tones are enabled or disabled according to the assignment in the tone active bit of the 10P tone control parameters register (1.59.15). While the tones are being activated/ deactivated, this bit shall remain set as one. This bit shall be reset to zero when the operation is over or upon reset.

45.2.1.36.3 Change tone direction (1.64.3)

When this bit is set to a one, the transmission direction of selected tones is changed according to the assignment in the tone direction bit of the 10P tone control parameters register (1.59.14). While the tones are being assigned, this bit shall remain set as one. This bit shall be reset to zero when the operation is over or upon reset.

45.2.1.36.4 Change SNR margin (1.64.2)

When this bit is set to a one, the SNR margin parameters for the selected tones are loaded according the assignment in the Minimum, Target and Maximum SNR margin bits of the 10P tone control parameters register (1.59.13:5, 1.60.8:0, 1.61.8:0). While the parameters are being loaded, this bit shall remain set as one. This bit shall be reset to zero when the operation is over or upon reset.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 132 of 717

45.2.1.36.5 Change PSD level (1.64.1)

When this bit is set to a one, the PSD level for the selected tones is set according to the value in the PSD level bits of the 10P tone control parameters register (1.62.8:0). While the PSD is being set, this bit shall remain set as one. This bit shall be reset to zero when the operation is over or upon reset.

45.2.1.36.6 Change USPBO reference PSD (1.64.0)

When this bit is set to a one, the upstream power back-off reference PSD level for the selected tones is set according to the value in the USPBO PSD reference bits of the 10P tone control parameters register (1.63.8:0). While the reference PSD is being set, this bit shall remain set as one. This bit shall be reset to zero when the operation is over or upon reset.

45.2.1.37 10P tone status registers (Registers 1.65, 1.66, 1.67)

The 10P tone status registers allow the STA to query the status of any individual tone in the link. The values read in the 10P tone status register correspond to the tone whose number is set in the "Lower tone" of the 10P tone group registers (see 45.2.1.34).

The status of some tones is read from the link partner. Because the constant update of these values would be a strain on channel resources, these values are only updated for selected tones when the "Refresh tone table" command is issued in the 10P tone control action register (1.64).

The 10P tone status registers bit definitions are given in Table 45–10v.

Table 45–10v—10P tone status registers bit definitions

Bit(s)	Name	Description	R/W[a]
1.65.15	Refresh status	1 = tone entry has been refreshed 0 = tone entry has not been refreshed since last read	RO
1.65.14	Active	1 = tone is disabled 0 = tone is active	RO
1.65.13	Direction	1 = tone is assigned to upstream communication 0 = tone is assigned to downstream communication	RO
1.65.12:8	Reserved	Value always 0, writes ignored	RO
1.65.7:0	RX PSD	PSD of the tone at the receiver in dBm/Hz	RO
1.66.15:8	TX PSD	PSD of the tone at the transmitter in dBm/Hz	RO
1.66.7:3	Bit load	The number of bits currently loaded on the tone	RO
1.66.2:0	Reserved	Value always 0, writes ignored	RO
1.67.15:10	Reserved	Value always 0, writes ignored	RO
1.67.9:0	SNR margin	Current SNR margin for the tone R = value of bits SNR Margin = R/4 dB	RO

[a]RO = Read Only

45.2.1.37.1 Refresh status (1.65.15)

This bit set to a one indicates that the values for this tone table have not been read since the last "Refresh tone status" command is issued in the 10P tone control action register (1.64). Upon reading this bit or upon reset, the bit shall be reset to zero.

45.2.1.37.2 Active (1.65.14)

When read as a one, this bit indicates that the selected tone is disabled (i.e. powered off and not carrying data).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 133 of 717

45.2.1.37.3 Direction (1.65.13)

When read as a one, this bit indicates that the selected tone is assigned to upstream communication. When read as a zero, the tone is assigned to downstream communication.

45.2.1.37.4 RX PSD (1.65.7:0)

These bits report the PSD of the selected tone as perceived at the receiver in units of dBm/Hz.

45.2.1.37.5 TX PSD (1.66.15:8)

These bits report the PSD of the selected tone as output by the transmitter in units of dBm/Hz.

45.2.1.37.6 RX PSD (1.66.7:3)

These bits report the number of bits encoded on the selected tone.

45.2.1.37.7 SNR Margin (1.67.9:0)

These bits report the current SNR margin for the selected tone, as perceived by the receiver, in units of dB. The value of the SNR margin is obtained by dividing the decimal value of bits 9:0 by 4.

45.2.1.38 10P outgoing indicator bits status register (Register 1.68)

The 10P outgoing indicator bits status register conveys the current state of the indicator bits being sent to the link partner. (See 62.3.4.7) The bit definitions for the 10P indicator bits status register are shown in Table 45–10w.

Table 45–10w—10P outgoing indicator bits status register bit definition

Bit(s)	Name	Description	R/W[a]
1.68.15:9	Reserved	Value always 0, writes ignored	RO
1.68.8	LoM	1 = received signal below SNR margin threshold 0 = normal state	RO
1.68.7	lpr	1 = power supply voltage invalid 0 = normal state	RO
1.68.6	po	1 = PMA/PMD is being powered off 0 = normal state	RO
1.68.5	Rdi	1 = severely errored frames have been received 0 = normal state	RO
1.68.4	los	1 = signal power is lower than the threshold 0 = normal state	RO
1.68.3	fec-f	1 = reserved condition 0 = normal state	RO
1.68.2	be-f	1 = reserved condition 0 = normal state	RO
1.68.1	fec-s	1 = corrected errors have been detected in the received FEC block of slow data 0 = normal state	RO
1.68.0	be-s	1 = non-corrected errors have been detected in the received block of slow data 0 = normal state	RO

[a]RO = Read Only

NOTE—These bit refer to “slow” data. 10PASS-TS uses the slow data channel as referenced in T1.424. The name is kept here to simplify a comparison between the two documents

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 134 of 717

45.2.1.38.1 LoM (1.68.8)

When read as a one, this bit indicates that the PMA/PMD is receiving a signal whose SNR margin is below the set threshold (see 45.2.1.20). The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.2 lpr (1.68.7)

When read as a one, this bit indicates that the PMA/PMD is not receiving sufficient power supply input for proper operation. The specific conditions that cause this bit to be set are implementation specific. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.3 po (1.68.6)

When read as a one, this bit indicates that the PMA/PMD has been instructed to power off. The specific conditions that cause this bit to be set are implementation specific. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.4 Rdi (1.68.5)

When read as a one, this bit indicates that the PMA/PMD has received PMA/PMD frames containing severe errors. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.5 los (1.68.4)

When read as a one, this bit indicates that the PMA/PMD is not receiving a valid signal. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.6 fec-f (1.68.3)

This bit is reserved and shall read as zero for 10PASS-TS.

45.2.1.38.7 be-f (1.68.2)

This bit is reserved and shall read as zero for 10PASS-TS.

45.2.1.38.8 fec-s (1.68.1)

When read as a one, this bit indicates that the PMA/PMD is receiving FEC blocks with one or more correctable errors. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.38.9 be-s (1.68.0)

When read as a one, this bit indicates that the PMA/PMD is receiving FEC blocks with one or more uncorrectable errors. The status of this condition is reported to the link partner PMA/PMD via the 10PASS-TS indicator bits.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 135 of 717

45.2.1.39 10P incoming indicator bits status register (Register 1.69)

The 10P indicator bits status register conveys the current state of the indicator bits being received from the link partner's PMA (see 62.3.4.7). The bit definitions for the 10P incoming indicator bits status register are shown in Table 45–10w.

Table 45–10x—10P incoming indicator bits status register bit definition

Bit(s)	Name	Description	R/W[a]
1.69.15:9	Reserved	Value always 0, writes ignored	RO
1.69.8	LoM	1 = received signal below SNR margin threshold 0 = normal state	RO
1.69.7	Flpr	1 = power supply voltage invalid 0 = normal state	RO
1.69.6	Fpo	1 = PMA/PMD is being powered off 0 = normal state	RO
1.69.5	Rdi	1 = severely errored frames have been received 0 = normal state	RO
1.69.4	Flos	1 = signal power is lower than the threshold 0 = normal state	RO
1.69.3:2	Reserved	Value always 0	RO
1.69.1	Ffec-s	1 = corrected errors have been detected in the received FEC block of slow data 0 = normal state	RO
1.69.0	Febe-s	1 = non-corrected errors have been detected in the received block of slow data 0 = normal state	RO

[a]RO = Read Only

NOTE —These bit refer to "slow" data. 10PASS-TS uses the slow data channel as referenced in T1.424. The name is kept here to simplify a comparison between the two documents.

45.2.1.39.1 LoM (1.69.8)

When read as a one, this bit indicates that the link partner PMA/PMD is receiving a signal whose SNR margin is below the set threshold (see 45.2.1.20). The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.39.2 Flpr (1.69.7)

When read as a one, this bit indicates that the link partner PMA/PMD is not receiving sufficient power supply input for proper operation. The specific conditions that cause this bit to be set are implementation specific. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 136 of 717

45.2.1.39.3 Fpo (1.69.6)

When read as a one, this bit indicates that the link partner PMA/PMD has been instructed to power off. The specific conditions that cause this bit to be set are implementation specific. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.39.4 Rdi (1.69.5)

When read as a one, this bit indicates that the link partner PMA/PMD has received PMA/PMD frames containing severe errors. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.39.5 Flos (1.69.4)

When read as a one, this bit indicates that the link partner PMA/PMD has is not receiving a valid signal. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.39.6 Ffec-s (1.69.1)

When read as a one, this bit indicates that the link partner PMA/PMD is receiving FEC blocks with one or more correctable errors. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.39.7 Febe-s (1.69.0)

When read as a one, this bit indicates that the link partner PMA/PMD is receiving FEC blocks with one or more uncorrectable errors. The status of this condition is reported to the local PMA/PMD via the 10PASS-TS indicator bits.

45.2.1.40 10P cyclic extension configuration register (Register 1.70)

The 10P cyclic extension configuration register controls the length of the cyclic extension for the 10P PMD. For more information, see 62.3.4.2. The value of the cyclic extension is equal to the decimal value set in bits 15:0. Values of decimal 10, 20 and 40 are valid. Writes to set any other values shall be ignored. Upon reset, the PMD shall set these bits to a decimal value of 20.

The bit definitions for this register are shown in Table 45–10y.

Table 45–10y—10P cyclic extension configuration register bit definitions

Bit(s)	Name	Description	R/W[a]
1.70.15:0	Cyclic extension	The value of the cyclic extension	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

45.2.1.41 10P attainable downstream data rate register (Register 1.71)

The 10P attainable downstream data rate register reports the data rate that the -R link partner measures to be the highest data rate for downstream transmission. The data rate is encoded as 1 kb/s times the decimal value of the register bits 15:0. The value of the register bits are not valid until after link is “up” (see 45.2.1.12.4).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 137 of 717

The bit definitions for this register are found in Table 45–10z**.**

Table 45–10z—10P attainable downstream data rate register bit definitions

Bit(s)	Name	Description	R/W[a]
1.71.15:0	Attainable downstream data rate	Data rate in 1 kb/s increments	RO

[a]RO = Read Only

45.2.1.42 2B general parameter register (Register 1.80)

The 2B general parameter register controls various parameters for the operation of the 2BASE-TL PMA/ PMD.

This register is read only for -R ports which may be read so the STA may know the mode selected by the -O port. The selected parameters on the -O are sent to the -R link partner on link initialization. For more information on how these parameters are passed across the physical link using G.994.1 signalling (see 61B.3.2).

The bit definitions for the 2B general parameter register are found in Table 45–10aa.

Table 45–10aa— 2B general parameter register bit definition

Bit(s)	Name	Description	R/W[a]
1.80.15	Reserved	Value always 0, writes ignored	R/W
1.80.14:10	PMMS target margin	margin = 14:10 - 10dB	R/W
1.80.9	Line probing control	1 = use line probing 0 = do not use line probing (default)	R/W
1.80.8	Noise environment	1 = current condition 0 = worst case (default)	R/W
1.80.7:2	Reserved	Value always 0, writes ignored	R/W
1.80.1:0	Region	Selects the regional annex to operate under 00 = Annex A 01 = Annex B 10 = Annex C 11 = reserved, writes ignored	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

45.2.1.42.1 PMMS target margin (1.80.14:10)

The PMMS target margin specified in bits 14:10 specifies the noise margin that the PMMS procedure tries to attain. The margin is expressed in dB as the decimal value of bits 14:10 minus 10dB. The margin specified is measured either against either worst case or current line conditions, based on the value set in 1.80.8.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 138 of 717

The PMMS margin value is transferred during 2BASE-TL initialization via the worst case PMMS margin bits in Table 61B–57 and Table 61B–43, or the current condition PMMS margin bits in Table 61B–48 and Table 61B–44.

45.2.1.42.2 Line probing control (1.80.9)

When set to a one, this bit tells the PMA/PMD to perform line probing the next time link is initialized. When set to a zero, the PMA/PMD does not use line probing. Line probing causes the PMA/PMD to select probe duration and the link data rate. For more information, see the documents referenced in 63.3.

45.2.1.42.3 Noise environment (1.80.8)

This bit controls the reference noise used during line probing. When set to a one, the noise environment is based on the current line conditions. When set to a zero, the noise environment is based on worst case models. For more information, see the documents referenced in 63.3.

45.2.1.42.4 Region (1.80.1:0)

These bits select the regional annex that is used for the operation of the 2BASE-TL PMA/PMD. These annexes refer to clauses in documents referenced by the 2BASE-TL PMA/PMD specification. These are not annexes in IEEE Std 802.3-2002 or its amendments. For details on each annex, see the document referenced in 63.1.3.

45.2.1.43 2B PMD parameters registers (Registers 1.81 through 1.88)

The 2B PMD parameters registers set the transmission parameters for an individual 2BASE-TL PMA/PMD link. When the link is initialized, these parameters are used by the link partner PMA/PMDs in an attempt to achieve specified settings.

These registers allow one to specify a single fixed data rate or up to four data rate ranges at the -O PMA/PMD. An additional set of four data ranges are found in the 2B extended PMD parameters registers (1.102 through 1.109). Bit descriptions for the 2B extended PMD parameters registers are found in 45.2.1.57. Together these sets allow up to eight data rate ranges to be specified.

If at least one data rate range is specified with different Minimum and Maximum data rates, the link is trained with the highest attainable rate. If line probing is enabled, the highest rate is determined by the result of line probing and the “Data rate step” value is ignored. If line probing is disabled, the minimum and maximum rate, “Data rate step” and “Power” values are used to determine the highest attainable rate.

In the case of a single fixed rate specified (Minimum data rate1 equals Maximum data rate1, Data rate step[1:8] set to zero, Minimum/Maximum data rate[2:8] set to zero), the link is trained at the specified rate.

When multiple ranges are specified, the PMD selects the first attainable range, starting sequentially from the first range.

Since writing to this register does not have an immediate effect, reading this register returns the desired parameters, which are not necessarily the current operating parameters.

For more information on how these parameters are passed across the physical link using G.994.1 signalling (see 61B.3.2).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 139 of 717

The bit definitions for the 2B PMD parameters register are found in Table 45–10ab.

Table 45–10ab— 2B PMD parameters registers bit definition

Bit(s)	Name	Description	R/W[a]
1.81.15	Reserved	Value always 0, writes ignored	R/W
1.81.14:8	Min data rate1	Min data rate of the first range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.81.7	Reserved	Value always 0, writes ignored	R/W
1.81.6:0	Max data rate1	Max data rate of the first range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.82.15:14	Reserved	Value always 0, writes ignored	R/W
1.82.13:7	Data rate step1	Data rate step of the first range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.82.6:2	Power1	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.82.1:0	Constellation1	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.83.15	Reserved	Value always 0, writes ignored	R/W
1.83.14:8	Min data rate2	Min data rate of the second range n = value of the bits, n valid 3 to 89 Data Rate =64n kb/s	O: R/W R: RO
1.83.7	Reserved	Value always 0, writes ignored	R/W
1.83.6:0	Max data rate2	Max data rate of the second range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.84.15:14	Reserved	Value always 0, writes ignored	R/W
1.84.13:7	Data rate step2	Data rate step of the second range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.84.6:2	Power2	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.84.1:0	Constellation2	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.85.15	Reserved	Value always 0, writes ignored	R/W
1.85.14:8	Min data rate3	Min data rate of the third range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.85.7	Reserved	Value always 0, writes ignored	R/W

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 140 of 717

Table 45–10ab— 2B PMD parameters registers bit definition *(continued)*

Bit(s)	Name	Description	R/W[a]
1.85.6:0	Max data rate3	Max data rate of the third range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.86.15:14	Reserved	Value always 0, writes ignored	R/W
1.86.13:7	Data rate step3	Data rate step of the third range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.86.6:2	Power3	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.86.1:0	Constellation3	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.87.15	Reserved	Value always 0, writes ignored	R/W
1.87.14:8	Min data rate4	Min data rate of the fourth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.87.7	Reserved	Value always 0, writes ignored	R/W
1.87.6:0	Max data rate4	Max data rate of the fourth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.88.15:14	Reserved	Value always 0, writes ignored	R/W
1.88.13:7	Data rate step4	Data rate step of the fourth range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.88.6:2	Power4	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.88.1:0	Constellation4	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

45.2.1.43.1 Minimum data rate (1.81 through 87.14:8)

Bits 14:8 in registers 1.81 through 1.87 set the minimum data rate for each of the four ranges. Valid values for these bits are decimal 3 through 89, writes to set an invalid value shall be ignored. The rate is expressed in units of kb/s and is derived by multiplying the decimal value of bits 14:8 by 64.

45.2.1.43.2 Max data rate (1.81 through 87.6:0)

Bits 6:0 in registers 1.81 through 1.87 set the maximum data rate for each of the four ranges. Valid values for these bits are decimal 3 through 89, writes to set an invalid value shall be ignored. The rate is expressed in units of kb/s and is derived by multiplying the decimal value of bits 6:0 by 64.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 141 of 717

45.2.1.43.3 Data rate step (1.82 through 88.13:7)

Bits 13:7 in registers 1.82 through 1.88 set the granularity used by the PMA/PMD when determining the line rate. Valid values for these bits are decimal 1 through 86, writes to set an invalid value shall be ignored. The data rate step is expressed in units of kb/s and is derived by multiplying the decimal value of bits 13:7 by 64.

45.2.1.43.4 Power (1.82 through 88.6:2)

Bits 6:2 in registers 1.82 through 1.88 set the allowed power level for each data rate range. The power levels set in these bits override those of the annex selected in the 2B general parameter register (1.80). The power level is expressed in units of dBm and is derived by the following equation, where x equals the value of bits 6:2.

$$power = \left(5 + \frac{x}{2}\right) \text{ dBm} \qquad (45–3)$$

45.2.1.43.5 Constellation (1.82 through 88.1:0)

Bits 1:0 in registers 1.82 through 1.88 set the allowed constellation for each data rate range. Setting a value of 10 or 01 restricts the constellation to 16- or 32-TCPAM respectively. When set to a value of 00, the PMD automatically determines the constellation during initialization. Attempts to set a value of 11 shall be ignored.

45.2.1.44 2B code violation errors counter (Register 1.89)

The 2B code violation errors counter is a 16-bit counter that contains the number of the 2BASE-TL CRC anomalies. See 63.2.2.3 for more information. These bits shall be set to all zeros upon an MMD reset and upon being read.

Bit definitions for the 2B code violation errors counter are found in Table 45–10ac.

Table 45–10ac—2B code violation errors counter bit definitions

Bits(s)	Name	Description	R/W[a]
1.89.15:0	Code violations [15:0]	The bytes of the counter	RO

[a]RO = Read Only

45.2.1.45 2B link partner code violations register (Register 1.90)

The 2B link partner code violations register provides the -O STA with a snapshot of the -R link partner's 2B code violations counter. Because this register is not a counter, its value will be updated only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10ac.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 142 of 717

45.2.1.46 2B errored seconds counter (Register 1.91)

This 8-bit counter contains the number of errored seconds (see 63.2.2.3) These bits shall be set to all zeros when the register is read by management or upon an MMD reset.

Bit definitions for the 2B errored seconds counter are found in Table 45–10ad.

Table 45–10ad—2B errored seconds counter bit definitions

Bits(s)	Name	Description	R/W[a]
1.91.15:8	Reserved	Value always 0, writes ignored	RO
1.91.7:0	Errored seconds [7:0]	The byte of the counter	RO

[a]RO = Read Only

45.2.1.47 2B link partner errored seconds register (Register 1.92)

The 2B link partner errored seconds register provides the -O STA with a snapshot of the -R link partner's 2B errored seconds counter. Because this register is not a counter, its value will be updated only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10ad.

45.2.1.48 2B severely errored seconds counter (Register 1.93)

This 8-bit counter contains the number severely errored seconds (see 63.2.2.3). These bits shall be set to all zeros when the register is read by management or upon an MMD reset.

Bit definitions for the 2B severely errored seconds register are found in Table 45–10ae.

Table 45–10ae—2B severely errored counter register bit definitions

Bits(s)	Name	Description	R/W[a]
1.93.15:8	Reserved	Value always 0, writes ignored	RO
1.93.7:0	Severely errored seconds [7:0]	The byte of the counter	RO

[a]RO = Read Only

45.2.1.49 2B link partner severely errored seconds register (Register 1.94)

The 2B link partner severely errored seconds register provides the -O STA with a snapshot of the -R link partner's 2B severely errored seconds counter. Because this register is not a counter, its value will be updated only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 143 of 717

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10ae.

45.2.1.50 2B LOSW counter (Register 1.95)

This 8-bit counter contains the number of loss of sync seconds (see 63.2.2.3). These bits shall be set to all zeros when the register is read by management or upon an MMD reset.

Bit definitions for the 2B LOSW counter are found in Table 45–10af.

Table 45–10af—2B LOSW counter bit definitions

Bits(s)	Name	Description	R/W[a]
1.95.15:8	Reserved	Value always 0, writes ignored	RO
1.95.7:0	loss of sync seconds [7:0]	The byte of the counter	RO

[a]RO = Read Only

45.2.1.51 2B link partner LOSW register (Register 1.96)

The 2B link partner LOSW register provides the -O STA with a snapshot of the -R link partner's 2B LOSW counter. Because this register is not a counter, its value will be updated only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10af.

45.2.1.52 2B unavailable seconds counter (Register 1.97)

This 8-bit counter contains the number of unavailable seconds (see 63.2.2.3). These bits shall be set to all zeros when the register is read by management or upon an MMD reset.

Bit definitions for the 2B unavailable seconds counter are found in Table 45–10ag.

Table 45–10ag—2B unavailable seconds counter bit definitions

Bits(s)	Name	Description	R/W[a]
1.97.15:8	Reserved	Value always 0, writes ignored	RO
1.97.7:0	unavailable seconds [7:0]	The byte of the counter	RO

[a]RO = Read Only

Copyright © 2004 IEEE. All rights reserved.

45.2.1.53 2B link partner unavailable seconds register (Register 1.98)

The 2B link partner unavailable seconds register provides the -O STA with a snapshot of the -R link partner's 2B unavailable seconds counter. Because this register is not a counter, its value will be updated only when refreshed. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10ag.

45.2.1.54 2B state defects register (Register 1.99)

The 2B state defects register is used to communicate defect states from the 2BASE-TL PMD (see 63.2.2.3). The thresholds for these defects are set using the 2B line quality threshold register (see 45.2.1.20). The register bits are cleared to zero when read by the STA or upon MMD reset. On a -R PMA/PMD, these bits are also cleared to zero upon the successful reception of a "Get link partner parameters" command (see 45.2.1.13.1).

Bit definitions for the 2B state defects register are found in Table 45–10ah.

Table 45–10ah—2B state defects register bit definitions

Bits(s)	Name	Description	R/W[a]
1.99.15	Segment defect	1 = segment defect detected 0 = normal condition	RO, LH
1.99.14	SNR margin defect	1 = SNR margin defect detected 0 = normal condition	RO, LH
1.99.13	Loop attenuation defect	1 = loop attenuation defect detected 0 = normal condition	RO, LH
1.99.12	Loss of sync word	1 = loss of sync word detected 0 = normal condition	RO, LH
1.99.11:0	Reserved	Value always 0, writes ignored	R/W

[a]RO = Read Only, LH = Latching High, R/W = Read/Write

45.2.1.54.1 Segment defect (1.99.15)

When read as a one, this bit indicates that the local PMA/PMD has detected a segment defect.

45.2.1.54.2 SNR margin defect (1.99.14)

When read as a one, this bit indicates that the local PMA/PMD has received a signal whose SNR is below the set threshold (see 45.2.1.20).

45.2.1.54.3 Loop attenuation defect (1.99.13)

When read as a one, this bit indicates that the PMA/PMD has detected that the loop attenuation is below the set threshold (see 45.2.1.20).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 145 of 717

45.2.1.54.4 Loss of sync word (1.99.12)

When read as a one, this bit indicates that the PMA/PMD has lost PMA/PMD frame sync.

45.2.1.55 2B link partner state defects register (Register 1.100)

The 2B link partner state defects register provides the -O STA with a snapshot of the -R link partner's 2B state defects register. The contents of this register are refreshed when the STA activates the "Get link partner parameter" command in the Link Partner PMA/PMD control register (see 45.2.1.13) and the command completes successfully (see 45.2.1.14.1).

This register is defined for -O port sub-types only.

The bit definitions for this register are found in Table 45–10ah.

45.2.1.56 2B negotiated constellation register (Register 1.101)

The bit definitions for this register are shown in Table 45–10ai.

Table 45–10ai—2B register bit definition

Bit(s)	Name	Description	R/W[a]
1.101.15:2	Reserved	Value always 0, writes ignored	R/W
1.101.1:0	Negotiated constellation	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = undetermined	RO

[a]R/W = Read/Write, RO = Read Only

45.2.1.56.1 Negotiated constellation (1.101.1:0)

These bits report the resulting constellation that was obtained after initialization. For more information on configuring 2BASE-TL PMA/PMD link initialization, see the 2B PMD parameter registers (see 45.2.1.43). When read as 10 or 01, the constellation has been set as either 16- or 32-TCPAM respectively. When read as 00, the local PMD has not arrived at a constellation with its link partner (as may be the case while link is down or initializing, after reset or upon a failed initialization).

45.2.1.57 2B extended PMD parameters registers (Registers 1.102 through 1.109)

The 2B extended PMD parameters registers define four additional data range sets to be used in conjunction with the 2B PMD parameters registers when additional PMD configuration detail is desired. For a complete description of the use of these registers, see 45.2.1.43.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 146 of 717

Bit definitions for these registers can be found in Table 45–10aj

Table 45–10aj— 2B extended PMD parameters registers bit definition

Bit(s)	Name	Description	R/W[a]
1.102.15	Reserved	Value always 0, writes ignored	R/W
1.102.14:8	Min data rate5	Min data rate of the fifth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.102.7	Reserved	Value always 0, writes ignored	R/W
1.102.6:0	Max data rate5	Max data rate of the fifth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.103.15:14	Reserved	Value always 0, writes ignored	R/W
1.103.13:7	Data rate step5	Data rate step of the fifth range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.103.6:2	Power5	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.103.1:0	Constellation5	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.104.15	Reserved	Value always 0, writes ignored	R/W
1.104.14:8	Min data rate6	Min data rate of the sixth range n = value of the bits, n valid 3 to 89 Data Rate =64n kb/s	O: R/W R: RO
1.104.7	Reserved	Value always 0, writes ignored	R/W
1.104.6:0	Max data rate6	Max data rate of the sixth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.105.15:14	Reserved	Value always 0, writes ignored	R/W
1.105.13:7	Data rate step6	Data rate step of the sixth range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.105.6:2	Power6	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.105.1:0	Constellation6	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.106.15	Reserved	Value always 0, writes ignored	R/W
1.106.14:8	Min data rate7	Min data rate of the seventh range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.106.7	Reserved	Value always 0, writes ignored	R/W

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 147 of 717

Table 45–10aj— 2B extended PMD parameters registers bit definition *(continued)*

Bit(s)	Name	Description	R/W[a]
1.106.6:0	Max data rate7	Max data rate of the seventh range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.107.15:14	Reserved	Value always 0, writes ignored	R/W
1.107.13:7	Data rate step7	Data rate step of the seventh range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.107.6:2	Power7	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.107.1:0	Constellation7	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO
1.108.15	Reserved	Value always 0, writes ignored	R/W
1.108.14:8	Min data rate8	Min data rate of the eighth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.108.7	Reserved	Value always 0, writes ignored	R/W
1.108.6:0	Max data rate8	Max data rate of the eighth range n = value of the bits, n valid 3 to 89 Data Rate = 64n kb/s	O: R/W R: RO
1.109.15:14	Reserved	Value always 0, writes ignored	R/W
1.109.13:7	Data rate step8	Data rate step of the eighth range n = value of the bits, n valid 1 to 86 Data Rate = 64n kb/s	O: R/W R: RO
1.109.6:2	Power8	x = multiple of 0.5 dBm to add to 5 dBm offset Power = (5 + 0.5x) dBm	O: R/W R: RO
1.109.1:0	Constellation8	11 = reserved 10 = 16-TCPAM 01 = 32-TCPAM 00 = automatically set by the PHY	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

45.2.1.57.1 Minimum data rate (1.102 through 108.14:8)

Bits 14:8 in registers 1.102 through 1.108 set the minimum data rate for each of the four extended ranges. Valid values for these bits are decimal 3 through 89. writes to set an invalid value shall be ignored. The rate is expressed in units of kb/s and is derived by multiplying the decimal value of bits 14:8 by 64.

45.2.1.57.2 Max data rate (1.102 through 108.6:0)

Bits 6:0 in registers 1.102 through 1.108 set the maximum data rate for each of the four extended ranges. Valid values for these bits are decimal 3 through 89, writes to set an invalid value shall be ignored. The rate is expressed in units of kb/s and is derived by multiplying the decimal value of bits 6:0 by 64.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 148 of 717

45.2.1.57.3 Data rate step (1.103 through 109.13:7)

Bits 13:7 in registers 1.102 through 1.109 set the granularity used by the PMA/PMD when determining the line rate. Valid values for these bits are decimal 1 through 86, writes to set an invalid value shall be ignored. The data rate step is expressed in units of kb/s and is derived by multiplying the decimal value of bits 13:7 by 64.

45.2.1.57.4 Power (1.103 through 109.6:2)

Bits 6:2 in registers 1.103 through 1.109 set the allowed power level for each extended data rate range. The power levels set in these bits override those of the annex selected in the 2B general parameter register (1.80). The power level is expressed in units of dBm and is derived by the following equation, where x equals the value of bits 6:2.

$$\text{power} = \left(5 + \frac{x}{2}\right) \text{dBm} \qquad (45–4)$$

45.2.1.57.5 Constellation (1.103 through 109.1:0)

Bits 1:0 in registers 1.103 through 1.109 set the allowed constellation for each extended data rate range. Setting a value of 10 or 01 restricts the constellation to 16- or 32-TCPAM respectively. When set to a value of 00, the PMD automatically determines the constellation during initialization. Attempts to set a value of 11 shall be ignored.

45.2.2.5 WIS devices in package (Registers 2.5 and 2.6)

Replace entire subclause text with the following text:

The WIS devices in package registers are defined in Table 45–1a.

Delete 802.3ae-2002 Table 45-15.

45.2.2.14 10G WIS Far End Line BIP Errors (Register 2.55 and 2.56)

Insert the following NOTE at the end of the subclause:

NOTE—These counters do not follow the behaviour described in 45.2 for 32-bit counters.

45.2.2.15 10G WIS Line BIP Errors (Register 2.57 and 2.58)

Insert the following NOTE at the end of the subclause:

NOTE—These counters do not follow the behaviour described in 45.2 for 32-bit counters.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 149 of 717

45.2.3 PCS registers

Change 802.3ae-2002 Table 45-29 as follows:

Table 45–29—PCS registers

Register address	Register name
3.0	PCS control 1
3.1	PCS status 1
3.2, 3.3	PCS device identifier
3.4	PCS speed ability
3.5, 3.6	PCS devices in package
3.7	10G PCS control 2
3.8	10G PCS status 2
3.9 through 3.13	Reserved
3.14, 3.15	PCS package identifier
3.16 through 23	Reserved
3.24	10GBASE-X PCS status
3.25	10GBASE-X PCS test control
3.26 through 31	Reserved
3.32	10GBASE-R PCS status 1
3.33	10GBASE-R PCS status 2
3.34 through 37	10GBASE-R PCS test pattern seed A
3.38 through 41	10GBASE-R PCS test pattern seed B
3.42	10GBASE-R PCS test pattern control
3.43	10GBASE-R PCS test pattern error counter
3.44 through ~~3.32 767~~3.59	Reserved
3.60	10P/2B capability
3.61	10P/2B PCS control register
3.62, 3.63	10P/2B PME available
3.64, 3.65	10P/2B PME aggregate
3.66	10P/2B PAF RX error counter
3.67	10P/2B PAF small fragment counter
3.68	10P/2B PAF large fragments counter
3.69	10P/2B PAF overflow counter
3.70	10P/2B PAF bad fragment counter
3.71	10P/2B PAF lost fragment counter
3.72	10P/2B PAF lost start of fragment counter
3.73	10P/2B PAF lost end of fragment counter
~~3.44~~3.74 through 3.32 767	Reserved
3.32 768 through 3.65 535	Vendor specific

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 150 of 717

45.2.3.1 PCS control 1 register (Register 3.0)

Change 802.3ae-2002 Table 45-30 to read:

Table 45–30—PCS control 1 register bit definitions

Bit(s)	Name	Description	R/W[a]
3.0.15	Reset	1 = PCS reset 0 = Normal operation	R/W SC
3.0.14	Loopback	1 = Enable Loopback mode 0 = Disable Loopback mode	R/W
3.0.13	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
3.0.12	Reserved	Value always 0, writes ignored	R/W
3.0.11	Low power	1 = Low-power mode 0 = Normal operation	R/W
3.0.10:7	Reserved	Value always 0, writes ignored	R/W
3.0.6	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
3.0.5:2	Speed selection	5 4 3 2 1 x x x = Reserved x 1 x x = Reserved x x 1 x = Reserved 0 0 0 1 = 10PASS-TS/2BASE-TL 0 0 0 0 = 10 Gb/s	R/W
3.0.1:0	Reserved	Value always 0, writes ignored	R/W

[a]RO = Read Only, SC = Self Clearing

45.2.3.1.2 Loopback (3.0.14)

Change the first paragraph to read:

The 10GBASE-R PCS shall be placed in a Loopback mode of operation when bit 3.0.14 is set to a one. When bit 3.0.14 is set to a one, the 10GBASE-R PCS shall accept data on the transmit path and return it on the receive path. The specific behaviour of the 10GBASE-R PCS during loopback is specified in 49.2. For all other port types ~~when operating at 10 Gb/s~~, the PCS loopback functionality is not applicable and writes to this bit shall be ignored and reads from this bit shall return a value of zero.

45.2.3.1.4 Speed selection (3.0.13, 3.0.6, 3.0.5:2)

Insert the following paragraph at the end of the subclause:

The speed selection bits 3.0.5:2, when set to 0001, select the use of the 10PASS-TS and 2BASE-TL PCS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 151 of 717

45.2.3.2.1 Fault (3.1.7)

Insert the following sentence at the end of the subclause:

For 10BASE-TS or 2BASE-TL operation, this bit shall become a one when any 10P/2B PCS registers indicate a fault (see 45.2.3.17 and 45.2.3.21 through 45.2.4.5).

45.2.3.2.2 PCS receive link status (3.1.2)

Insert the following paragraph after the last paragraph:

When a 10PASS-TS or 2BASE-TL PCS is implemented and selected, the PCS sets this bit to a one when the encapsulation function of one or more attached TC sublayers is synchronized, indicated by the TC_synchronized signal, is true as in 61.2.3. For example, when four TC sublayers are attached to the 10P/2B PCS, this bit is set to a one while any of the four TCs are synchronized. In all other cases, this bit latches low.

45.2.3.4 PCS speed ability (Register 3.4)

Change 802.3ae-2002 Table 45–32 to read:

Table 45–32— PCS speed ability register bit definitions

Bit(s)	Name	Description	R/W[a]
3.4.15:2	Reserved for future speeds	Value always 0, writes ignored	RO
3.4.1	10PASS-TS/2BASE-TL capable	1 = PCS is capable of operating as the 10P/2B PCS 0 = PCS is not capable of operating as the 10P/2B PCS	RO
3.4.0	10G capable	1 = PCS is capable of operating at 10 Gb/s 0 = PCS is not capable of operating at 10 Gb/s	RO

[a]RO = Read Only

Insert the following subclause after 802.3ae-2002 45.2.3.4.1:

45.2.3.4.2 10PASS-TS/2BASE-TL capable (3.4.1)

When read as a one, this bit indicates that the PCS is able to operate as the 10PASS-TS/2BASE-TL PCS, as specified in Clause 61.

45.2.3.5 PCS devices in package (Registers 3.5 and 3.6)

Replace entire subclause text with the following text:

The PCS devices in package registers are defined in Table 45–1a.

Delete 802.3ae-2002 Table 45-33.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 152 of 717

Insert the following subclauses, tables, registers and descriptions after 45.2.3.16:

45.2.3.17 10P/2B capability register (3.60)

The 10P/2B capability register reports which functions are supported by the PCS. This register is present at the PCS layer for each PHY. The bit definitions of the 10P/2B capability register are shown in Table 45–42a.

Table 45–42a—10P/2B capability register bit definitions

Bit(s)	Name	Description	R/W[a]
3.60.15:13	Reserved	Value always 0, writes ignored	RO
3.60.12	PAF available	1 = PAF supported 0 = PAF not supported	RO
3.60.11	Remote PAF supported	1 = link partner supports PAF 0 = link partner does not support PAF	RO
3.60.10:0	Reserved	Value always 0, writes ignored	RO

[a]RO = Read Only

45.2.3.17.1 PAF available (3.60.12)

This bit indicates that the PHY supports the PME aggregation function. The PHY sets this bit to a one when the capability is supported and zero otherwise. This bit reflects the signal PAF_available in 61.2.3.

45.2.3.17.2 Remote PAF supported (3.60.11)

This bit indicates that the remote, link-partner PHY supports the PME aggregation function. The PHY sets this bit to a one when the capability is supported and zero otherwise. This bit does not accurately report the capability of the remote PCS until a remote discovery operation has been completed by the -O PHY. In this case, this bit is set if the “Ethernet bonding” NPar(2) bit is set in the capabilities exchange message received from the other device. See 61.4.7, which discusses use of G.994.1 to access remote registers.

45.2.3.18 10P/2B PCS control register (Register 3.61)

The assignment of bits in the 10P/2B PCS control register is shown in Table 45–42b.

Table 45–42b—10B/2B PCS control register bit definitions

Bit(s)	Name	Description	R/W[a]
3.61.15	MII receive during transmit	1 = MII can TX/RX simultaneously 0 = MII cannot TX/RX simultaneously (default)	R/W
3.61.14	TX_EN and CRS infer a collision	1 = MII uses TX_EN and CRS to infer a collision 0 = MII uses COL to indicate a collision (default)	R/W
3.61.13:1	Reserved	Value always 0, writes ignored	R/W
3.61.0	PAF enable	1 = use PAF 0 = do not use PAF	O: R/W R: RO

[a]R/W = Read/Write, RO = Read Only

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 153 of 717

45.2.3.18.1 MII receive during transmit (3.61.15)

This register bit is used to tell the PHY-MAC rate matching function if the MAC is capable of receiving frames from the PHY while the MAC is transmitting (i.e. sending frames to the PHY). The variable tx_rx_simultaneously for the PHY-MAC Rate-Matching function takes on the value of this bit as defined in 61.2.3.

45.2.3.18.2 TX_EN and CRS infer a collision (3.61.14)

This bit is set by the STA to tell the MAC-PHY rate matching function that the MAC-PHY interface does not have a separate collision signal but instead infers a collision when TX_EN and CRS are asserted simultaneously. The variable crs_and_tx_en_infer_col in the PHY-MAC Rate-Matching function takes on the value of this bit as in 61.2.3. This bit will default to a supported mode, and writes to unsupported modes will be ignored.

45.2.3.18.3 PAF enable (3.61.0)

Setting this bit to a one shall activate the PME aggregation function of the PCS when the link is established. Writes to this bit while link is up or initializing (see 45.2.1.12) or if the PAF is not supported shall be ignored. When link is established, handshake indicates the use of PAF to the -R PHY. This bit reflects the signal PAF_enable in 61.2.3.4.

45.2.3.19 10P/2B PME available (Registers 3.62 and 3.63)

The 10P/2B PME available registers are used to indicate which PMEs in the aggregation group are available to be attached to the queried PCS. A PME is marked as unavailable if the PME does not support PME aggregation or if the PME is currently marked to be aggregated with another PMD. For a device that does not support aggregation of multiple PMEs, a single bit of this register shall be set to one and all other bits cleared to zero.

These registers may be writable for -R ports. For PMEs that may be accessed through more than one MII, the availability is limited such that no PME may be mapped to more than one MII prior to enabling the links. In this case, the reset state of the 10P/2B PME available registers shall reflect the capabilities of the device, the management entity should reset appropriate bits to meet the restriction described.

If the -R device is not capable of aggregating PMEs to multiple MIIs then these registers may be read only.

The 10P/2B PME available register shall be available per PCS. For example, a package implementing four PMEs and one MII would have only one set of 10P/2B PME available registers, addressed by a read or write to 3.62 and 3.63 on any of those PHYs.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 154 of 717

For more information, see 61.2.2.8.3.

The assignment of bits in the 10P/2B PME Available registers is shown in Table 45–42c

Table 45–42c—10P/2B PME available register bit definitions

Bit(s)	Name	Description	R/W[a]
3.62.15:0	PME [p = 31:16] available	For each bit in the sequence: 1 = PME[p] is available for aggregating 0 = PME[p] is unavailable	O: RO R: R/W
3.63.15:0	PME [p = 15:0] available	For each bit in the sequence: 1 = PME[p] is available for aggregating 0 = PME[p] is unavailable	O: RO R: R/W

[a]RO = Read Only, R/W = Read/Write

45.2.3.20 10P/2B PME aggregate registers (Registers 3.64 and 3.65)

The 10P/2B PME aggregate registers are used to select PMEs for aggregation. Attempts to activate aggregation with an unavailable PME (see 45.2.3.19) are ignored. The PCS shall use PME aggregation if one or more bits are set to a one and if PME aggregation is supported.

The 10P/2B PME aggregate register shall be available per PCS. For example, a package implementing four PMEs and one MII would have only one set of 10P/2B PME aggregate registers, accessed by a read or write to 3.64, 3.65 on any of those PHYs.

Upon MMD reset, these registers shall be reset to all zeros.

For more information, see 61.2.2.8.3.

The assignment of bits for the 10P/2B PME aggregate registers are shown in Table 45–42d.

Table 45–42d—10P/2B PME aggregate register bit definitions

Bit(s)	Name	Description	R/W[a]
3.64.15:0	Aggregate with PME [p = 31:16]	For each bit in the sequence: 1 = activate aggregation with PME[p] 0 = deactivate aggregation with PME[p]	R/W
3.65.15:0	Aggregate with PME [p = 15:0]	For each bit in the sequence: 1 = activate aggregation with PME[p] 0 = deactivate aggregation with PME[p]	R/W

[a]R/W = Read/Write

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 155 of 717

45.2.3.21 10P/2B PAF RX error register (Register 3.66)

The 10P/2B PAF RX error register is a 16 bit counter that contains the number of fragments that have been received across the gamma interface with RxErr asserted. The corresponding signal, TC_PAF_RxErrorReceived, is defined in 61.2.3. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be reset to all zeroes when the 10P/2B PAF RX error register is read by the management function or upon execution of the MMD reset. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF RX error register is shown in Table 45–42e.

Table 45–42e—10P/2B PAF RX error register bit definitions

Bits(s)	Name	Description	R/W[a]
3.66.15:0	PAF RX errors[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.3.22 10P/2B PAF small fragments register (Register 3.67)

The 10P/2B PAF small fragments register is a 16 bit counter that contains the number of small fragments that have been received across the gamma interface. The corresponding signal, TC_PAF_FragmentTooSmall, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF small fragment register is shown in Table 45–42f.

Table 45–42f—10P/2B PAF small fragments register bit definitions

Bits(s)	Name	Description	R/W[a]
3.67.15:0	PAF small fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.3.23 10P/2B PAF large fragments register (Register 3.68)

The 10P/2B PAF large fragments register is a 16 bit counter that contains the number of large fragments that have been received across the gamma interface. The corresponding signal, TC_PAF_FragmentTooLarge, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF large fragments register is shown in Table 45–42g.

Table 45–42g—10P/2B PAF large fragments register bit definitions

Bits(s)	Name	Description	R/W[a]
3.68.15:0	PAF large fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 156 of 717

45.2.3.24 10P/2B PAF overflow register (Register 3.69)

The 10P/2B PAF overflow register is a 16 bit counter that contains the number of fragments that have been received across the gamma interface which would have caused the receive buffer to overflow. The corresponding signal, TC_PAF_Overflow, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF overflow register is shown in Table 45–42h.

Table 45–42h—10P/2B PAF overflow register bit definitions

Bits(s)	Name	Description	R/W[a]
3.69.15:0	PAF overflow fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.3.25 10P/2B PAF bad fragment register (Register 3.70)

The 10P/2B PAF bad fragment register is a 16 bit counter that contains the number of bad fragments that have been received across the gamma interface. The corresponding signal, TC_PAF_BadFragmentReceived, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF bad fragment register is shown in Table 45–42i.

Table 45–42i—P10P/2B AF bad fragment register bit definitions

Bits(s)	Name	Description	R/W[a]
3.70.15:0	PAF bad fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.3.26 10P/2B PAF lost fragment register (Register 3.71)

The 10P/2B PAF lost fragment register is a 16 bit counter that contains the number of gaps in the sequence of fragments that have been received across the gamma interface. The corresponding signal, TC_PAF_LostFragment, is defined in 61.2.3.

These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF lost fragment register is shown in Table 45–42j.

Table 45–42j—10P/2B PAF lost fragment register bit definitions

Bits(s)	Name	Description	R/W[a]
3.71.15:0	PAF lost fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 157 of 717

45.2.3.27 10P/2B PAF lost start of fragment register (Register 3.72)

The 10P/2B PAF lost start of fragment register is a 16-bit counter that contains the number of missing start of fragment indicators expected by the frame assembly function. The corresponding signal, TC_PAF_LostStart, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF lost start of fragment register is shown in Table 45–42k.

Table 45–42k—10P/2B PAF lost start of fragment register bit definitions

Bits(s)	Name	Description	R/W[a]
3.72.15:0	PAF lost starts of fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.3.28 10P/2B PAF lost end of fragment register (Register 3.73)

The 10P/2B PAF lost end of fragment register is a 16 bit counter that contains the number of missing end of fragment indicators expected by the frame assembly function. The corresponding signal, TC_PAF_LostEnd, is defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. This counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the register retains its previous value. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B PAF lost end of fragment register is shown in Table 45–42l.

Table 45–42l—10P/2B PAF lost end of fragment register bit definitions

Bits(s)	Name	Description	R/W[a]
3.73.15:0	PAF lost ends of fragments[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.4.5 PHY XS devices in package (Registers 4.5 and 4.6)

Replace entire subclause text with the following text:

The PHY XS devices in package registers are defined in Table 45–1a.

Delete 802.3ae-2002 Table 45-48.

45.2.5.5 DTE XS devices in package (Registers 5.5 and 5.6)

Replace entire subclause text with the following text:

The DTE XS devices in package registers are defined in Table 45–1a.

Delete Table 45-56.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 158 of 717

Insert new subclauses 45.2.6 and 45.2.7 (and subordinate subclauses) before 802.3ae-2002 subclause 45.2.6. Renumber 802.3ae-2002 subclauses as appropriate.

45.2.6 TC registers

The assignment of registers in the TC MMD is shown in Table 45–59a.

Table 45–59a—TC registers

Register address	Register name
6.0	TC control
6.1	Reserved
6.2, 6.3	TC device identifier
6.4	TC speed ability
6.5, 6.6	TC devices in package
6.7 through 6.13	Reserved
6.14, 6.15	TC package identifier
6.16	10P/2B aggregation discovery control[a]
6.17	10P/2B aggregation and discovery status[a]
6.18, 6.19, 6.20	10P/2B aggregation discovery code[a]
6.21	10P/2B link partner PME aggregate control[a]
6.22, 6.23	10P/2B link partner PME aggregate data[a]
6.24	10P/2B TC CRC error counter
6.25, 6.26	10P/2B TPS-TC coding violations counter
6.27	10P/2B TC indications
6.28 through 6.32 767	Reserved
6.32 768 through 6.65 535	Vendor specific

[a]Register is defined only for -O port types and is reserved for -R ports

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 159 of 717

45.2.6.1 TC control register (Register 6.0)

The assignment of bits in the TC control register is shown in Table 45–59b. The default value for each bit of the TC control register has been chosen so that the initial state of the device upon power up or completion of reset is a normal operational state without management intervention.

Table 45–59b—TC control register bit definitions

Bit(s)	Name	Description	R/W[a]
6.0.15	Reset	1 = TC reset 0 = Normal operation	R/W SC
6.0.14	Reserved	Value always 0, writes ignored	R/W
6.0.13	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
6.0.12:7	Reserved	Value always 0, writes ignored	R/W
6.0.6	Speed selection	13 6 1 1 = bits 5:2 select speed 0 x = unspecified x 0 = unspecified	R/W
6.0.5:2	Speed selection	5 4 3 2 1 x x x = Reserved x 1 x x = Reserved x x 1 x = Reserved 0 0 0 1 = 10PASS-TS/2BASE-TL 0 0 0 0 = Reserved	R/W
6.0.1:0	Reserved	Value always 0, writes ignored	R/W

[a]R/W = Read/Write, SC = Self Clearing

45.2.6.1.1 Reset (6.0.15)

Resetting a TC is accomplished by setting bit 6.0.15 to a one. This action shall set all TC registers to their default states. As a consequence, this action may change the internal state of the TC and the state of the physical link. This action may also initiate a reset in any other MMDs that are instantiated in the same package. This bit is self-clearing, and a TC shall return a value of one in bit 6.0.15 when a reset is in progress; otherwise, it shall return a value of zero. A TC is not required to accept a write transaction to any of its registers until the reset process is completed. The control and management interface shall be restored to operation within 0.5 s from the setting of bit 6.0.15. During a reset, a TC shall respond to reads from register bit 6.0.15.

NOTE—This operation may interrupt data communication. The data path of a TC, depending on type and temperature, may take many seconds to run at optimum error rate after exiting from reset.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 160 of 717

45.2.6.1.2 Speed selection (6.0.13, 6.0.6, 6.0.5:2)

Speed selection bits 6.0.13 and 6.0.6 shall both be written as a one. Any attempt to change the bits to an invalid setting shall be ignored. These two bits are set to one in order to make them compatible with Clause 22.

The operating mode of the TC may be selected using bits 5 through 2. The abilities of the TC are advertised in the TC speed ability register. A TC may ignore writes to the TC speed selection bits that select speeds it has not advertised in the TC speed ability register. It is the responsibility of the STA entity to ensure that mutually acceptable speeds are applied consistently across all the MMDs on a particular PHY.

The speed selection bits 6.0.5:2, when set to 0001, select the use of the 10PASS-TS and 2BASE-TL TC.

The TC speed selection defaults to a supported ability.

45.2.6.2 TC device identifier (Registers 6.2 and 6.3)

Registers 6.2 and 6.3 provide a 32-bit value, which may constitute a unique identifier for a particular type of TC. The identifier shall be composed of the 3rd through 24th bits of the Organizationally Unique Identifier (OUI) assigned to the device manufacturer by the IEEE, plus a six-bit model number, plus a four-bit revision number. A TC may return a value of zero in each of the 32 bits of the TC device identifier.

The format of the TC device identifier is specified in 22.2.4.3.1.

45.2.6.3 TC speed ability (Register 6.4)

The assignment of bits in the TC speed ability register is shown in Table 45–59c.

Table 45–59c—TC speed ability register bit definitions

Bit(s)	Name	Description	R/W[a]
6.4.15:1	Reserved for future speeds	Value always 0, writes ignored	RO
6.4.1	10PASS-TS/2BASE-TL capable	1 = TC is capable of operating as the 10P/2B TC 0 = TC is not capable of operating as the 10P/2B TC	RO
6.4.0	Reserved	Value always 0, writes ignored	RO

[a]RO = Read Only

45.2.6.3.1 10PASS-TS/2BASE-TL capable (6.4.1)

When read as a one, this bit indicates that the TC is able to operate as the 10PASS-TS/2BASE-TL TC, as specified in Clause 61.

45.2.6.4 TC devices in package registers (Registers 6.5, 6.6)

The TC devices in package registers are defined in Table 45–1a.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 161 of 717

45.2.6.5 TC package identifier registers (Registers 6.14, 6.15)

Registers 6.14 and 6.15 provide a 32-bit value, which may constitute a unique identifier for a particular type of package that the TC MMD is instantiated within. The identifier shall be composed of the 3rd through 24th bits of the Organizationally Unique Identifier (OUI) assigned to the package manufacturer by the IEEE, plus a six-bit model number, plus a four-bit revision number. A TC may return a value of zero in each of the 32 bits of the package identifier.

A non-zero package identifier may be returned by one or more MMDs in the same package. The package identifier may be the same as the device identifier.

The format of the package identifier is specified in 22.2.4.3.1.

45.2.6.6 10P/2B aggregation discovery control register (Register 6.16)

The 10P/2B aggregation discovery control register allows the STA of an -O port to determine the aggregation capabilities of an -R link-partner.

The 10P/2B aggregation discovery control register shall be implemented as a unique register for each TC MMD in a package. For example, a package implementing four PHYs would have four independent instances of the 10P/2B aggregation discovery control register, accessed by a read or write to each PHY.

For information on the encoding of this function on the physical link, see 61.4.7.

This register is defined for -O port sub-types only. The register bit definitions for the 10P/2B aggregation discovery control register are shown in Table 45–59d.

Table 45–59d—10P/2B aggregation discovery control register bit definitions

Bit(s)	Name	Description	R/W[a]
6.16.15:2	Reserved	Value always 0, writes ignored	R/W
6.16.1:0	Discovery operation	01 = Ready (default) 00 = Set if clear 11 = Clear if same 10 = Get	R/W

[a]R/W = Read/Write

45.2.6.6.1 Discovery operation (6.16.1:0)

The Discovery operation bits are used to query and manipulate the remote discovery register. The remote discover register is not a Clause 45 object, but a variable of the PME Aggregation PCS function on -R ports. The Discovery operation makes use of G.994.1 handshaking messages, therefore valid only when the link status is down (i.e., neither Initializing nor Up). Attempts to perform an operation while the link is Initializing or Up shall be ignored.

The default state of these bits is “Ready.” The bits shall indicate “Ready” any time the PME aggregation function is capable of performing an operation on the remote discovery register. If PAF is not supported, the discovery operation bits shall indicate “Ready” and ignore writes. These bits shall return to the “Ready” state upon MMD Reset.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 162 of 717

If the STA sets the bits to "Get," the PME aggregation function queries the remote discovery register and returns its contents to the aggregation discovery code register.

If the STA sets the bits to "Set if clear," the PME aggregation function passes a message to the -R PCS instructing it to set the remote discovery register to the contents of the aggregation discovery code register, but only if the remote discovery register is all zeroes.

If the STA sets the bits to "Clear if same," the PME aggregation function passes a message to the -R PCS instructing it to clear the remote discovery register, but only if the contents of the remote discovery register currently match the contents of the aggregation discovery code register.

While the requested operation is in progress, the PHY maintains the operation value in the bits. After the operation is complete, the PHY shall set the bits to indicate "Ready". If the operation does not complete within a 255 second time-out, the discovery operation result bit (6.17.0) will be set to "1" (operation unsuccessful), and the discovery operation bits will be set to "Ready".

45.2.6.7 10P/2B aggregation and discovery status register (Register 6.17)

The 10P/2B aggregation and discovery status register is defined for -O port sub-types only.

The assignment of bits in the 10P/2B aggregation and discovery status register is shown in Table 45–59e.

Table 45–59e—10P/2B aggregation and discovery status register bit definitions

Bit(s)	Name	Description	R/W[a]
6.17.15:2	Reserved	Value always 0, writes ignored	R/W
6.17.1	Link partner aggregate operation result	1 = operation unsuccessful 0 = operation completed successfully (default)	RO, LH
6.17.0	Discovery operation result	1 = operation unsuccessful 0 = discovery operation completed successfully (default)	RO, LH

[a]R/W = Read/Write, RO = Read Only, LH = Latches High

45.2.6.7.1 Link partner aggregate operation result (6.17.1)

When a link partner aggregate operation is complete, the PHY sets this bit to indicate the result of the operation. A "1" indicates that the operation could not be completed. This may be for a variety of reasons:

a) PMA/PMD link status is initializing or up.
b) the link partner is not present or not responding.

If PAF is not supported, this bit shall remain set to zero.

45.2.6.7.2 Discovery operation result (6.17.0)

When a discovery operation is complete, the PHY sets this bit to indicate the result of the operation. A "1" indicates that the operation could not be completed. This may be for a variety of reasons:

a) PMA/PMD link status is initializing or up
b) a "Set if clear" operation was requested but the remote discovery register was not clear
c) a "Clear if same" operation was requested but the remote discovery register did not match the aggregation discovery code register
d) the link partner is not present or not responding

If PAF is not supported, this bit shall read as zero.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 163 of 717

45.2.6.8 10P/2B aggregation discovery code (Registers 6.18, 6.19, 6.20)

The 10P/2B aggregation discovery code registers store the value of the remote_discovery_register exchanged with the -R link partner.

This register is defined for -O port sub-types only.

These registers shall be implemented as unique registers for each TC MMD in a package. For example, a package implementing four TCs would have four independent instances of the 10P/2B aggregation discovery code registers, accessed by a read or write to each PHY.

For information on the encoding of this function on the physical link, please see 61.4.7.

The assignment of bits for the 10P/2B aggregation discovery code registers are shown in Table 45–59f.

Table 45–59f—10P/2B aggregation discovery code bit definitions

Bit(s)	Name	Description	R/W[a]
6.18.15:0	Code [47:32]	The two most significant octets of the aggregation discovery code	R/W
6.19.15:0	Code [31:16]	The two middle octets of the aggregation discovery code	R/W
6.20.15:0	Code [15:0]	The two least significant octets of the aggregation discovery code	R/W

[a]R/W = Read/Write

45.2.6.9 10P/2B link partner PME aggregate control register (Register 6.21)

The 10P/2B link partner PME aggregate control register allows the STA of an -O port to read and write the remote PME_Aggregate_register (see 61.2.2.8.3).

The 10P/2B link partner PME aggregate control register shall be implemented as a unique register for each TC MMD in a package. For example, a package implementing four TCs would have four independent instances of the 10P/2B link partner PME aggregate control register, accessed by a read or write to each PHY.

This register is defined for -O port sub-types only.

The register bit definitions for the 10P/2B link partner PME aggregate control register are shown in Table 45–59g.

Table 45–59g—10P/2B link partner PME aggregate control register bit definitions

Bit(s)	Name	Description	R/W[a]
6.21.15:2	Reserved	Value always 0, writes ignored	R/W
6.21.1:0	Link partner aggregate operation	01 = Ready (default) 00 = Set 11 = invalid 10 = Get	R/W

[a]R/W = Read/Write

45.2.6.9.1 Link partner aggregate operation (1.21.1:0)

The Link partner aggregate operation bits are used to query and manipulate the remote PME_Aggregate_register. This operation makes use of G.994.1 handshaking messages and therefore must be performed only when the link status is down (i.e., neither Initializing nor Up). Attempts to perform an operation while the link is Initializing or Up shall be ignored.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 164 of 717

The default state of these bits is “Ready.” The bits shall indicate “Ready” any time the PME aggregation function is capable of performing an operation on the remote PME_Aggregate_register. If PAF is not supported, the link partner aggregate operation bits shall indicate “Ready” ignore writes. These bits shall return to the “Ready” state upon MMD Reset.

If the STA sets the bits to “Get,” the PME aggregation function queries the remote PME_Aggregate_register and returns its contents to the 10P/2B link partner PME aggregate data register (see 45.2.6.10).

If the STA sets the bits to “Set,” the PME aggregation function passes a message to the -R PCS instructing it to set the bit location in the remote PME_Aggregate_register corresponding to the TC on which the message was received to the contents of bit 0 of the 10P/2B link partner PME aggregate data register.

While the requested operation is in progress, the PHY maintains the operation value in the bits. After the operation is complete, the PHY shall set the bits to indicate “Ready”.

45.2.6.10 10P/2B link partner PME aggregate data (Registers 6.22, 6.23)

The 10P/2B link partner PME aggregate data registers store the data for the link partner aggregate operation. This register either contains the result of a “Get” operation, the data sent in a “Set” operation, or all zeros following an MMD reset.

These registers are defined for -O port sub-types only.

These registers shall be implemented as unique registers for each TC MMD in a package. For example, a package implementing four TCs would have four independent instances of the registers, accessed by a read or write to each PHY.

The assignment of bits for the 10P/2B link partner PME aggregate data registers are shown in Table 45–59h.

Table 45–59h—10P/2B link partner PME aggregate data registers bit definitions

Bit(s)	Name	Description	R/W[a]
6.22.15:0	Data[31:16]	The two most significant octets of the link partner PME aggregate data	R/W
6.23.15:0	Data[15:0]	The two least significant octets of the link partner PME aggregate data	R/W

[a]R/W = Read/Write

45.2.6.11 10P/2B TC CRC error register (Register 6.24)

The 10P/2B TC CRC error register is a 16 bit counter that contains the number of TC frames received with the TC_CRC_error primitive asserted, defined in 61.2.3. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B TC CRC error register are shown in Table 45–59i.

Table 45–59i—10P/2B TC CRC error register bit definitions

Bits(s)	Name	Description	R/W[a]
6.24.15:0	CRC errors[15:0]	The bytes of the counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 165 of 717

45.2.6.12 10P/2B TPS-TC coding violations counter (Registers 6.25, 6.26)

The 10P/2B TPS-TC coding violations counter is a 32-bit counter that contains the number of 64/64-octet encapsulation errors, defined in 61.3.3.1. This counter increments for each 64/65-octet received with the TC_coding_error signal asserted. These bits shall be reset to all zeroes when the register is read by the management function or upon execution of the MMD reset. These bits shall be held at all ones in the case of overflow. The assignment of bits in the 10P/2B TPS-TC coding violations counter are shown in Table 45–59j.

Table 45–59j—10P/2B TPS-TC coding violations counter bit definitions

Bits(s)	Name	Description	R/W[a]
6.25.15:0	Coding violations[31:16]	The high order bytes of the counter	RO, MW
6.26.15:0	Coding violations[15:0]	The low order bytes of the counter	RO, MW

[a]RO = Read Only, MW = Multi-word

45.2.6.13 10P/2B TC indications register (Register 6.27)

The 10P/2B TC indications register reflects the state of the TC sync detect state machine and the state of the link partner TC sync detect state machine (if present) (see 61.3.3.5). The assignment of bits in the 10P/2B TC indications register is shown in Table 45–59k.

Table 45–59k—10P/2B TC indications register bit definitions

Bit(s)	Name	Description	R/W[a]
6.27.15:9	Reserved	Value always 0	RO
6.27.8	Local TC synchronized	1 = TC_synchronized is TRUE 0 = TC_synchronized is FALSE	RO
6.27.7:1	Reserved	Value always 0	RO
6.27.0	Remote TC synchronized	1 = remote_TC_out_of_sync is FALSE 0 = remote_TC_out_of_sync is TRUE	RO

[a]RO = Read Only

45.2.6.13.1 Local TC synchronized (6.27.8)

This bit is read as a one when the TC_synchronized variable in the TC sync detect state machine is TRUE (see 61.2.3.3.8). In all other cases, this bit is read as zero.

45.2.6.13.2 Remote TC synchronized (6.27.0)

This bit is read as a one when the remote_TC_out_of_sync variable in the link partner TC sync detect state machine is FALSE (see 61.2.3.3.8). In all other cases, this bit is read as zero.

45.2.7 Clause 22 extension registers

As new management features are added to 10, 100 and 1000 Mb/s PHYs, more register space is required beyond that defined in Clause 22. The Clause 22 extension MMD provides this space. This MMD is defined only for 10, 100, 1000 Mb/s PHYs. Since these PHYs do not segment their management by their sublayers, all management extensions to these PHYs will appear in the Clause 22 extension MMD.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 166 of 717

The assignment of registers in the Clause 22 extension MMD is shown in Table 45–59l.

Table 45–59l—Clause 22 extension registers

Register address	Register name
29.0 through 29.4	Reserved
29.5, 29.6	Clause 22 extension devices in package
29.7	FEC capability
29.8	FEC control
29.9	FEC buffer head coding violation counter
29.10	FEC corrected blocks counter
29.11	FEC uncorrected blocks counter
29.12 through 29.32 767	Reserved

45.2.7.1 Clause 22 extension devices in package registers (Registers 29.5, 29.6)

The Clause 22 extension devices in package registers are defined in Table 45–1a.

45.2.7.2 FEC capability register (Register 29.7)

The assignment of bits in the FEC capability register is shown in.Table 45–59m.

Table 45–59m—FEC capability register bit definitions

Bits(s)	Name	Description	R/W[a]
29.7.15:1	Reserved	Value always 0, writes ignored	RO
29.7.0	FEC capable	1 = FEC supported 0 = FEC unsupported	RO

[a]RO = Read Only

45.2.7.2.1 FEC capable (29.7.0)

When read as a one, this bit indicates that the PHY supports forward error correction. When read as a zero, the PHY does not support forward error correction.

45.2.7.3 FEC control register (Register 29.8)

The assignment of bits in the FEC control register is shown in Table 45–59n.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 167 of 717

Table 45–59n—FEC control register bit definitions

Bit(s)	Name	Description	R/W[a]
29.8.15:1	Reserved	Value always 0, writes ignored	R/W
29.8.0	FEC enable	1 = FEC enabled 0 = FEC disabled	R/W

[a]R/W = Read/Write

45.2.7.3.1 FEC enable (29.8.0)

When written as a one, this bit enables the PHY's forward error correction. When written as a zero, FEC is disabled. This bit shall be set to zero upon execution of a PHY reset.

45.2.7.4 FEC buffer head coding violation counter (Register 29.9)

The assignment of bits in the FEC buffer head coding violation counter register is shown in Table 45–59o. See 65.2.3.6.1 for a definition of this register. These bits shall be reset to all zeroes when the register is read by the management function or upon PHY reset. These bits shall be held at all ones in the case of overflow.

Table 45–59o—FEC buffer head coding violation counter register bit definitions

Bit(s)	Name	Description	R/W[a]
29.9.15:0	FEC buffer head coding violation counter	Error counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

45.2.7.5 FEC corrected blocks counter (Register 29.10)

The assignment of bits in the FEC corrected blocks counter register is shown in Table 45–59p. See 65.2.3.6.2 for a definition of this register. These bits shall be reset to all zeroes when the register is read by the management function or upon PHY reset. These bits shall be held at all ones in the case of overflow.

Table 45–59p—FEC corrected blocks counter register bit definitions

Bit(s)	Name	Description	R/W[a]
29.10.15:0	FEC corrected blocks counter	Error counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 168 of 717

45.2.7.6 FEC uncorrected blocks counter (Register 29.11)

The assignment of bits in the FEC uncorrected blocks counter register is shown in Table 45–59q. See 65.2.3.6.3 for a definition of this register. These bits shall be reset to all zeroes when the register is read by the management function or upon PHY reset. These bits shall be held at all ones in the case of overflow.

Table 45–59q—FEC uncorrected blocks counter register bit definitions

Bit(s)	Name	Description	R/W[a]
29.11.15:0	FEC uncorrected blocks counter	Error counter	RO, NR

[a]RO = Read Only, NR = Non Roll-over

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 169 of 717

45.5 Protocol Implementation Conformance Statement (PICS) proforma for Clause 45, MDIO/MDC management interface[1]

45.5.4.3 Major capabilities/options

Insert the following rows to the end of the table:

Item	Feature	Subclause	Status	Support	Value/Comment
*TC	Implementation of the TC MMD	45.2.6	10P*2 B:M	Yes [ ] No [ ]	
*CTT	Implementation of the Clause 22 extension MMD	45.2.7	O	Yes [ ] No [ ]	

45.5.5.2 PMA/PMD options

Insert the following rows to the end of the table:

Item	Feature	Subclause	Status	Support	Value/Comment
*10P	Implementation of the 10PASS-TS PMA/PMD	45.2.1.4	O	Yes [ ] No [ ]	
*2B	Implementation of the 2BASE-TL PMA/PMD	45.2.1.4	O	Yes [ ] No [ ]	

45.5.5.3 PMA/PMD management functions

Insert the following rows to the end of the table:

Item	Feature	Subclause	Status	Support	Value/Comment
MM46	Bit indicates link down while initializing	45.2.1.2.2	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM47	Bit remains a one and writing a one is ignored when link is up or initializing	45.2.1.11.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM48	Bit set to zero upon reset or upon link down	45.2.1.11.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	-O sub-types only
MM49	Bit set to one upon reset or upon link down	45.2.1.11.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	-R sub-types only
MM50	Handshake tones not sent while bit is set to zero	45.2.1.11.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM51	Writes to set unsupported modes or when link is not down are ignored	45.2.1.11.4	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM52	Setting bit to one to one issues a cleardown command	45.2.1.11.5	PMA*10 P*2B:M	Yes [ ] N/A [ ]	

[1]Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 170 of 717

Item	Feature	Subclause	Status	Support	Value/Comment
MM53	MMD clears bit to zero when cleardown command is issued or on reset	45.2.1.11.5	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM54	Writes ignored if link is not in “Link down (ready)” state	45.2.1.11.5	PMA*10 P*2B:M	Yes [ ] N/A [ ]	link state described in 45.2.1.12.4
MM55	PMA/PMD does not respond to handshake tones while bit is set to one	45.2.1.11.6	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM56	PMA/PMD responds to hand-shake tones properly when bit is set to zero	45.2.1.11.6	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM57	Bit set to zero upon MMD reset	45.2.1.11.6	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM58	Writes to set unsupported modes are ignored	45.2.1.11.7	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM59	Bits zero when link is down or initializing	45.2.1.12.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM60	Bits set indicate linked port type or link status	45.2.1.12.4	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM61	Bits indicate 001 while link is initializing	45.2.1.12.4	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM62	Bits indicate 000 when link is down and handshake tones are not detected	45.2.1.12.4	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM63	Bits indicate 100 when link is down and handshake tones are detected	45.2.1.12.4	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM64	Bit held as one during operation, clears to zero after	45.2.1.13.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM65	Result = failed after 10 second timeout	45.2.1.13.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM66	Writes to one while link is down are marked completed and failed	45.2.1.13.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM67	Bit held as one during operation, clears to zero after	45.2.1.13.2	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM68	Result = failed after 10 second timeout	45.2.1.13.2	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM69	Writes to one while link is down are marked completed and failed	45.2.1.13.2	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM70	Bit set to result of the “Get” oper-ation	45.2.1.14.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM71	Bit set to zero on read or reset	45.2.1.14.1	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM72	Bit set to result of the “Send ”operation	45.2.1.14.2	PMA*10 P*2B:M	Yes [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 171 of 717

Item	Feature	Subclause	Status	Support	Value/Comment
MM73	Bits are reset to zero when read or on reset	45.2.1.15	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM74	Bits are held to all ones upon counter overflow	45.2.1.15	PMA*10 P*2B:M	Yes [ ] N/A [ ]	
MM75	Bits are reset to zero when read or reset	45.2.1.22	PMA*10 P:M	Yes [ ] N/A [ ]	
MM76	Bits are reset to zero when read or reset	45.2.1.23	PMA*10 P:M	Yes [ ] N/A [ ]	
MM77	Bits are held at all ones when PHY cannot determine value	45.2.1.26.1	PMA*10 P:M	Yes [ ] N/A [ ]	ex: While link is down
MM78	Bit remain as one while tones are being refreshed	45.2.1.36.1	PMA*10 P:M	Yes [ ] N/A [ ]	
MM79	Bit set to zero when operation completes or upon reset	45.2.1.36.1	PMA*10 P:M	Yes [ ] N/A [ ]	
MM80	Bit remain as one while tones are being activated/deactivated	45.2.1.36.2	PMA*10 P:M	Yes [ ] N/A [ ]	
MM81	Bit set to zero when operation completes or upon reset	45.2.1.36.2	PMA*10 P:M	Yes [ ] N/A [ ]	
MM82	Bit remain as one while tone direction is being changed	45.2.1.36.3	PMA*10 P:M	Yes [ ] N/A [ ]	
MM83	Bit set to zero when operation completes or upon reset	45.2.1.36.3	PMA*10 P:M	Yes [ ] N/A [ ]	
MM84	Bit remain as one while SNR margins parameters are loaded	45.2.1.36.4	PMA*10 P:M	Yes [ ] N/A [ ]	
MM85	Bit set to zero when operation completes or upon reset	45.2.1.36.4	PMA*10 P:M	Yes [ ] N/A [ ]	
MM86	Bit remain as one while PSD level is set	45.2.1.36.5	PMA*10 P:M	Yes [ ] N/A [ ]	
MM87	Bit set to zero when operation completes or upon reset	45.2.1.36.5	PMA*10 P:M	Yes [ ] N/A [ ]	
MM88	Bit remain as one while reference PSD level is set	45.2.1.36.6	PMA*10 P:M	Yes [ ] N/A [ ]	
MM89	Bit set to zero when operation completes or upon reset	45.2.1.36.6	PMA*10 P:M	Yes [ ] N/A [ ]	
MM90	Bits are reset to zero when read or upon reset	45.2.1.37.1	PMA*10 P:M	Yes [ ] N/A [ ]	
MM91	Bits read as zero	45.2.1.38.6	PMA*10 P:M	Yes [ ] N/A [ ]	
MM92	Bits read as zero	45.2.1.38.7	PMA*10 P:M	Yes [ ] N/A [ ]	
MM93	Writes to an invalid value are ignored	45.2.1.40	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 10, 20, or 40
MM94	Bits set to default value on MMD reset	45.2.1.40	PMA*10 P:M	Yes [ ] N/A [ ]	Default value is decimal 20

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 172 of 717

Item	Feature	Subclause	Status	Support	Value/Comment
MM95	Writes to set an invalid value are ignored	45.2.1.43.1	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 3 through 89
MM96	Writes to set an invalid value are ignored	45.2.1.43.2	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 3 through 89
MM97	Writes to set an invalid value are ignored	45.2.1.43.3	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 1through 86
MM98	Writes to set an invalid value are ignored	45.2.1.43.5	PMA*10 P:M	Yes [ ] N/A [ ]	Invalid value is 11
MM99	Bits set to zero when read or reset	45.2.1.44	PMA*2 B:M	Yes [ ] N/A [ ]	
MM100	Bits set to zero when read or reset	45.2.1.46	PMA*2 B:M	Yes [ ] N/A [ ]	
MM101	Bits set to zero when read or reset	45.2.1.48	PMA*2 B:M	Yes [ ] N/A [ ]	
MM102	Bits set to zero when read or reset	45.2.1.50	PMA*2 B:M	Yes [ ] N/A [ ]	
MM103	Bits set to zero when read or reset	45.2.1.52	PMA*2 B:M	Yes [ ] N/A [ ]	
MM104	Writes to set an invalid value are ignored	45.2.1.57.1	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 3 through 89
MM105	Writes to set an invalid value are ignored	45.2.1.57.2	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 3 through 89
MM106	Writes to set an invalid value are ignored	45.2.1.57.3	PMA*10 P:M	Yes [ ] N/A [ ]	Valid values are decimal 1through 86
MM107	Writes to set an invalid value are ignored	45.2.1.57.5	PMA*10 P:M	Yes [ ] N/A [ ]	Invalid value is 11

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 173 of 717

45.5.5.5 PCS options

Insert the following rows to the end of the table:

Item	Feature	Subclause	Status	Support	Value/Comment
*EPC	Implementation of the 10BASE-TS/2BASE-TL PCS	45.2.3.17	PCS: O	Yes [ ] No [ ] N/A [ ]	
*PAF	Implementation of the PME aggregation function	45.2.3.17	PCS* EPC: O	Yes [ ] No [ ] N/A [ ]	

45.5.5.7 PCS management functions

Insert the following rows to the end of the table:

Item	Feature	Subclause	Status	Support	Value/Comment
RM51	Bit indicates fault when any PCS register indicates fault	45.2.3.2.1	PCS* EPC: O	Yes [ ] No [ ] N/A [ ]	If sub-type is supported
RM52	Writes to bit 15 are ignored	45.2.3.17	PCS* EPC: O	Yes [ ] No [ ] N/A [ ]	If sub-type is unsupported
RM53	Writing this bit to a one activates the PAF when link is established	45.2.3.18.3	PCS* PAF: M	Yes [ ] N/A [ ]	
RM54	Writes to bit are ignored while link is active or initializing or if PAF is not supported	45.2.3.18.3	PCS* PAF: M	Yes [ ] N/A [ ]	
RM55	Bits indicate device capabilities upon reset	45.2.3.19	PCS* PAF: M	Yes [ ] N/A [ ]	
RM56	Writes to the register through any PCS MMD in the same package effect the register equally	45.2.3.19	PCS* PAF: M	Yes [ ] N/A [ ]	
RM57	Single bit set to one and all others cleared to zero when device does not support aggregation of multiple PMEs	45.2.3.19	PCS: M	Yes [ ] N/A [ ]	
RM58	PME aggregation used if one or more bits set	45.2.3.20	PCS* PAF: M	Yes [ ] N/A [ ]	
RM59	Registers set to all zeros upon reset	45.2.3.20	PCS* PAF: M	Yes [ ] N/A [ ]	
RM60	Writes to the register through any PCS MMD in the same package effect the register equally	45.2.3.20	PCS* PAF: M	Yes [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 174 of 717

Item	Feature	Subclause	Status	Support	Value/Comment
RM61	Bits reset to zero when read of upon MMD reset	45.2.3.21	PCS* PAF: M	Yes [ ] N/A [ ]	
RM62	Bits held to one upon overflow	45.2.3.21	PCS* PAF: M	Yes [ ] N/A [ ]	
RM63	Bits reset to zero when read of upon MMD reset	45.2.3.22	PCS* PAF: M	Yes [ ] N/A [ ]	
RM64	Bits held to one upon overflow	45.2.3.22	PCS* PAF: M	Yes [ ] N/A [ ]	
RM65	Bits reset to zero when read of upon MMD reset	45.2.3.23	PCS* PAF: M	Yes [ ] N/A [ ]	
RM66	Bits held to one upon overflow	45.2.3.23	PCS* PAF: M	Yes [ ] N/A [ ]	
RM67	Bits reset to zero when read of upon MMD reset	45.2.3.24	PCS* PAF: M	Yes [ ] N/A [ ]	
RM68	Bits held to one upon overflow	45.2.3.24	PCS* PAF: M	Yes [ ] N/A [ ]	
RM69	Bits reset to zero when read of upon MMD reset	45.2.3.25	PCS* PAF: M	Yes [ ] N/A [ ]	
RM70	Bits held to one upon overflow	45.2.3.25	PCS* PAF: M	Yes [ ] N/A [ ]	
RM71	Bits reset to zero when read of upon MMD reset	45.2.3.26	PCS* PAF: M	Yes [ ] N/A [ ]	
RM72	Bits held to one upon overflow	45.2.3.26	PCS* PAF: M	Yes [ ] N/A [ ]	
RM73	Bits reset to zero when read of upon MMD reset	45.2.3.27	PCS* PAF: M	Yes [ ] N/A [ ]	
RM74	Bits held to one upon overflow	45.2.3.27	PCS* PAF: M	Yes [ ] N/A [ ]	
RM75	Bits reset to zero when read of upon MMD reset	45.2.3.28	PCS* PAF: M	Yes [ ] N/A [ ]	
RM76	Bits held to one upon overflow	45.2.3.28	PCS* PAF: M	Yes [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 175 of 717

45.5.5.15 TC management functions

Insert new subclauses 45.5.5.15 through 45.5.5.17 before 45.5.5.15 (inserted by IEEE Std 802.3ae-2002), and renumber following subclauses appropriately:

Item	Feature	Subclause	Status	Support	Value/Comment
TC1	Device responds to all register addresses for that device	45.2	TC:M	Yes [ ] N/A [ ]	
TC2	Writes to undefined and read only register have no effect	45.2	TC:M	Yes [ ] N/A [ ]	
TC3	Operation is not affected by writes to reserved and unsupported bits	45.2	TC:M	Yes [ ] N/A [ ]	
TC4	Reserved and unsupported bits return a value of zero	45.2	TC:M	Yes [ ] N/A [ ]	
TC5	Setting bit to a one sets all TC registers to their default states	45.2.6.1.1	TC:M	Yes [ ] N/A [ ]	
TC6	Bit reads one while reset is in progress otherwise reads zero	45.2.6.1.1	TC:M	Yes [ ] N/A [ ]	
TC7	Control and management interface is restored within 0.5s from setting bit to a one	45.2.6.1.1	TC:M	Yes [ ] N/A [ ]	
TC8	During reset, TC responds to reads from bit	45.2.6.1.1	TC:M	Yes [ ] N/A [ ]	
TC9	Writes that would select an unsupported ability are ignored	45.2.6.1.2	TC:M	Yes [ ] N/A [ ]	
TC10	Identifier composed properly	45.2.6.2	TC:M	Yes [ ] N/A [ ]	
TC11	Identifier composed properly	45.2.6.5	TC:M	Yes [ ] N/A [ ]	
TC12	Register is unique across all PCS MMDs in a package	45.2.6.6	TC:M	Yes [ ] N/A [ ]	
TC13	Operation ignored when link is up or initializing	45.2.6.6.1	TC:M	Yes [ ] N/A [ ]	
TC14	Bits indicate “Ready” when PAF is capable	45.2.6.6.1	TC:M	Yes [ ] N/A [ ]	
TC15	Writes ignored and “Ready” indicated if PAF is unsupported	45.2.6.6.1	TC:M	Yes [ ] N/A [ ]	
TC16	Bits indicate “Ready” when operation is complete or upon reset	45.2.6.6.1	TC:M	Yes [ ] N/A [ ]	
TC17	Bits read as zero if PAF is unsupported	45.2.6.7.1	TC:M	Yes [ ] N/A [ ]	
TC18	Bits read as zero if PAF is unsupported	45.2.6.7.2	TC:M	Yes [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 176 of 717

Item	Feature	Subclause	Status	Support	Value/Comment
TC19	Register is unique across all PCS MMDs in a package	45.2.6.8	TC:M	Yes [ ] N/A [ ]	
TC20	Register is unique across all PCS MMDs in a package	45.2.6.9	TC:M	Yes [ ] N/A [ ]	
TC21	Operation ignored when link is up or initializing	45.2.6.9.1	TC:M	Yes [ ] N/A [ ]	
TC22	Bits indicate “Ready” when PAF is capable	45.2.6.9.1	TC:M	Yes [ ] N/A [ ]	
TC23	Writes ignored and “Ready” indicated if PAF is unsupported	45.2.6.9.1	TC:M	Yes [ ] N/A [ ]	
TC24	Bits indicate “Ready” when operation is complete or on reset	45.2.6.9.1	TC:M	Yes [ ] N/A [ ]	
TC25	Register is unique across all PCS MMDs in a package	45.2.6.10	TC:M	Yes [ ] N/A [ ]	
TC26	Bits reset to zero when read or reset	45.2.6.11	TC:M	Yes [ ] N/A [ ]	
TC27	Bits held to one upon overflow	45.2.6.11	TC:M	Yes [ ] N/A [ ]	
TC28	Bits reset to zero when read or reset	45.2.6.12	TC:M	Yes [ ] N/A [ ]	
TC29	Bits held to one upon overflow	45.2.6.12	TC:M	Yes [ ] N/A [ ]	

45.5.5.16 Clause 22 extension options

Item	Feature	Subclause	Status	Support	Value/Comment
*FEC	Implementation of PHY FEC	65.4.4.6	CTT: O	Yes [ ] No [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 177 of 717

45.5.5.17 Clause 22 extension management functions

Item	Feature	Subclause	Status	Support	Value/Comment
CT1	Device responds to all register addresses for that device	45.2	CTT: M	Yes [ ] N/A [ ]	
CT2	Writes to undefined and read only register have no effect	45.2	CTT: M	Yes [ ] N/A [ ]	
CT3	Operation is not affected by writes to reserved and unsupported bits	45.2	CTT: M	Yes [ ] N/A [ ]	
CT4	Reserved and unsupported bits return a value of zero	45.2	CTT: M	Yes [ ] N/A [ ]	
CT5	Bits set to zero upon PHY reset	45.2.7.3.1	CTT* FEC: M	Yes [ ] N/A [ ]	
CT6	Bits reset to all zeroes when the register is read by the management function or upon PHY reset.	45.2.7.4	CTT* FEC: M	Yes [ ] N/A [ ]	
CT7	Bits held at all ones in the case of overflow	45.2.7.4	CTT* FEC: M	Yes [ ] N/A [ ]	
CT8	Bits reset to all zeroes when the register is read by the management function or upon PHY reset.	45.2.7.5	CTT* FEC: M	Yes [ ] N/A [ ]	
CT9	Bits held at all ones in the case of overflow	45.2.7.5	CTT* FEC: M	Yes [ ] N/A [ ]	
CT10	Bits reset to all zeroes when the register is read by the management function or upon PHY reset.	45.2.7.6	CTT* FEC: M	Yes [ ] N/A [ ]	
CT11	Bits held at all ones in the case of overflow	45.2.7.6	CTT* FEC: M	Yes [ ] N/A [ ]	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 178 of 717

Annex A

(informative)

Bibliography

Insert the following bibliographical entries in alphabetic order and renumber as required.

Editor's note: These bibliographical numbers correspond to IEEE 802.3ah-2004 only. When this admentment is merged into IEEE Std 802.3 all bibliographical citations will be updated.

[B1] IEC 60721-2-1, Classification of environmental conditions — Part 2-1: Environmental conditions appearing in nature - Temperature and humidity, Edition 1.1.

[B2] IEC 62149-1 (2004), Fiber optics active components and devices: Performance standards — Part 1: General and guidance.

[B3] IEC 62255 - Multicore and symmetrical pair/quad cables for broadband digital communications (High bit rate Digital access Telecommunication Network.

[B4] GR-468-CORE, Generic Reliability Assurance Requirements for Optoelectronic Devices Used in Telecommunications Equipment.

[B5] GR-487-CORE, Generic Requirements for Electronic Equipment Cabinets.

[B6] GR-63-CORE, NEBS Requirements: Physical Protection.

[B7] ETSI EN 300 019-1-3, Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment Part 1–3: Classification of environmental conditions Stationary use at weatherprotected locations.

[B8] ETSI EN 300 019-1-4, Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment Part 1–3: Classification of environmental conditions Stationary use at non-weatherprotected locations.

[B9] ITU-T Y.1730 Recommendation, "Requirements for OAM functions in Ethernet based networks" 2004.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 179 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 180 of 717

Annex 30A

(normative)

GDMO specification for IEEE 802.3 managed object classes

Change the first paragraph of this annex as follows:

This annex formally defines the protocol encodings for CMIP and ISO/IEC 15802-2: 1995 [ANSI/IEEE Std 802.1B™ and 802.1k™, 1995 Edition] for the IEEE 802.3 Managed Objects using the templates specified in ISO/IEC 10165-4: 1992. The application of a GDMO template compiler against 30A.1 to ~~30A.8~~30A.19 will produce the proper protocol encodings.

30A.1.1 DTE MAC entity formal definition

Change the package definitions in 30A.1.1 as follows:

oMACEntity MANAGED OBJECT CLASS

```
DERIVED FROM        "CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992":top;
CHARACTERIZED BY
        pBasic      PACKAGE
                ATTRIBUTES  aMACID                          GET;
                ACTIONS     acInitializeMAC;
        ;
;
CONDITIONAL PACKAGES
        pMandatory  PACKAGE
                ATTRIBUTES  aFramesTransmittedOK            GET,
                            aSingleCollisionFrames          GET,
                            aMultipleCollisionFrames        GET,
                            aFramesReceivedOK               GET,
                            aFrameCheckSequenceErrors       GET,
                            aAlignmentErrors                GET,
                            aMACCapabilities                GET,
                            aDuplexStatus                   GET-REPLACE,
                            aRateControlAbility             GET,
                            aRateControlStatus              GET-REPLACE;,
                            aDeferControlAbility            GET,
                            aDeferControlStatus             GET-REPLACE;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) macMandatoryPkg(1)};
PRESENT IF      Conformance to DTE Management is desired. Attributes aMACCapabilities and
                aDuplexStatus are mandatory in systems that can operate in full duplex mode and
                are recommended in systems that can only operate in half duplex mode.,
        pRecommended PACKAGE
                ATTRIBUTES  aOctetsTransmittedOK            GET,
                            aFramesWithDeferredXmissions    GET,
                            aLateCollisions                 GET,
                            aFramesAbortedDueToXSColls      GET,
                            aFramesLostDueToIntMACXmitError GET,
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 181 of 717

```
                                aCarrierSenseErrors                 GET,
                                aOctetsReceivedOK                   GET,
                                aFramesLostDueToIntMACRcvError      GET,
                                aPromiscuousStatus                  GET-REPLACE,
                                aReadMulticastAddressList           GET;
                    ACTIONS     acAddGroupAddress,
                                acDeleteGroupAddress;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    package(4) macRecommendedPkg(2)};
    PRESENT IF      The Recommended Package is implemented.,
            pOptional           PACKAGE
                    ATTRIBUTES  aMulticastFramesXmittedOK           GET,
                                aBroadcastFramesXmittedOK           GET,
                                aMulticastFramesReceivedOK          GET,
                                aBroadcastFramesReceivedOK          GET,
                                aInRangeLengthErrors                GET,
                                aOutOfRangeLengthField              GET,
                                aFrameTooLongErrors                 GET,
                                aMACEnableStatus                    GET-REPLACE,
                                aTransmitEnableStatus               GET-REPLACE,
                                aMulticastReceiveStatus             GET-REPLACE,
                                aReadWriteMACAddress                GET-REPLACE;
                    ACTIONS     acExecuteSelfTest;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    package(4) optionalPkg(3)};
    PRESENT IF      The Optional Package and the Recommended Package are implemented.,
            pArray              PACKAGE
                    ATTRIBUTES  aCollisionFrames                    GET;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    package(4) arrayPkg(4)};
    PRESENT IF      The Array Package and the Recommended Package are implemented.,
            pExcessiveDeferral  PACKAGE
                    ATTRIBUTES  aFramesWithExcessiveDeferral        GET;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    package(4) excessiveDeferralPkg(5)};
    PRESENT IF      The ExcessiveDeferral Package and the Recommended Package are
                    implemented.;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    managedObjectClass(3) macObjectClass(1)};
```

Insert the following text at the end of 30A.1.1:

aDeferControlAbility ATTRIBUTE

```
    WITH ATTRIBUTE SYNTAX   IEEE802Dot3-MgmtAttributeModule.TrueFalse;
    MATCHES FOR             EQUALITY, ORDERING;
    BEHAVIOUR               bDeferControlAbility;
    REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                    attribute(7) deferControlAbility(311)};
```

bDeferControlAbility BEHAVIOUR

```
    DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.1.1.35;
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 182 of 717

aDeferControlStatus **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.DeferControl;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bDeferControlStatus;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) deferControlStatus(312)};

bDeferControlStatus **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.1.1.36;

30A.4.2 DTE MAC Control function entity formal definition

Insert the following text to the end of 30A.4.1:

oMPCP **MANAGED OBJECT CLASS**

DERIVED FROM “CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992”:top;
CHARACTERIZED BY
pMPCPBasic PACKAGE
ATTRIBUTES aMPCPID GET,
aMPCPAdminState GET,
aMPCPMode GET,
aMPCPLinkID GET,
aMPCPRemoteMACAddress GET,
aMPCPRegistrationState GET,
aMPCPMACCtrlFramesTransmitted GET,
aMPCPMACCtrlFramesReceived GET,
aMPCPTxGate GET,
aMPCPTxRegAck GET,
aMPCPTxRegister GET,
aMPCPTxRegRequest GET,
aMPCPTxReport GET,
aMPCPRxGate GET,
aMPCPRxRegAck GET,
aMPCPRxRegister GET,
aMPCPRxRegRequest GET,
aMPCPRxReport GET,
aMPCPTransmitElapsed GET,
aMPCPReceiveElapsed GET,
aMPCPRoundTripTime GET,
aMPCPDiscoveryWindowsSent GET,
aMPCPDiscoveryTimeout GET,
aMPCPMaximumPendingGrants GET;
ACTIONS acMPCPAdminControl;
;
;
REGISTERED AS{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) managedObjectClass(3) mpcpObjectClass(21)};

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 183 of 717

nbMPCP-macControl NAME BINDING

SUBORDINATE OBJECT CLASS oMPCP;
NAMED BY SUPERIOR OBJECT CLASS oMACControlEntity AND SUBCLASSES;
WITH ATTRIBUTE aMPCPID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) nameBinding(6) mpcp-macControl(34)};

aMPCPID ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpID(351)};

bMPCPID BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.1;

aMPCPAdminState ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PortAdminState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPAdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpAdminState(278)};

bMPCPAdminState BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.2;

aMPCPMode ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MPCPMode;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOURBEHAVIOUR bMPCPMode;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpMode(279)};

bMPCPMode BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.3;

aMPCPLinkID ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPLinkID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpLinkID(282)};

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 184 of 717

bMPCPLinkID BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.4;

aMPCPRemoteMACAddress ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MACAddress;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRemoteMACAddress;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpRemoteMACAddress(283)};

bMPCPRemoteMACAddress BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.5;

aMPCPRegistrationState ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MPCPRegState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRegistrationState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpRegistrationState(284)};

bMPCPRegistrationState BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.6;

aMPCPMACCtrlFramesTransmitted ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPMACCtrlFramesTransmitted;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpMACCtrlFramesTransmitted(280)};

bMPCPMACCtrlFramesTransmittedBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.7;

aMPCPMACCtrlFramesReceived ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPMACCtrlFramesReceived;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpMACCtrlFramesReceived(281)};

bMPCPMACCtrlFramesReceivedBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.8;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 185 of 717

aMPCPTxGate ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTxGate;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) txGate(315)};

bMPCPTxGate BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.9;

aMPCPTxRegAck ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTxRegAck;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) txRegAck(316)};

bMPCPTxRegAck BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.10;

aMPCPTxRegister ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTxRegister;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) txRegister(317)};

bMPCPTxRegister BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.11;

aMPCPTxRegRequest ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTxRegRequest;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) txRegRegister(318)};

bMPCPTxRegRequest BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.12;

aMPCPTxReport ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTxReport;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 186 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) txReport(319)};

bMPCPTxReport BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.13;

aMPCPRxGate ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRxGate;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) rxGate(320)};

bMPCPRxGate BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.14;

aMPCPRxRegAck ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRxRegAck;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) rxRegAck(321)};

bMPCPRxRegAck BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.15;

aMPCPRxRegister ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRxRegister;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) rxRegister(322)};

bMPCPRxRegister BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.16;

aMPCPRxRegRequest ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRxRegRequest;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) rxRegRequest(323)};

bMPCPRxRegRequest BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.17;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 187 of 717

aMPCPRxReport ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRxReport;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) rxReport(324)};

bMPCPRxReport BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.18;

aMPCPTransmitElapsed ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPTransmitElapsed;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpTransmitElapsed(285)};

bMPCPTransmitElapsed BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.19;

aMPCPReceiveElapsed ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPReceiveElapsed;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpReceiveElapsed(286)};

bMPCPReceiveElapsed BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.20;

aMPCPRoundTripTime ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPRoundTripTime;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpRoundTripTime(287)};

bMPCPRoundTripTime BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.21;

aMPCPDiscoveryWindowsSent ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPDiscoveryWindowsSent;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 188 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpDiscoveryWindowsSent(288)};

bMPCPDiscoveryWindowsSent BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.22;

aMPCPDiscoveryTimeout ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPDiscoveryTimeout;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpDiscoveryTimeout(290)};

bMPCPDiscoveryTimeout BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.23;

aMPCPMaximumPendingGrants ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bMPCPMaximumPendingGrants;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) mpcpMaximumPendingGrants(291)};

bMPCPMaximumPendingGrantsBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.24;

acMPCPAdminControl ACTION

BEHAVIOUR bMPCPAdminControl;
MODE CONFIRMED;
WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.AdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) action(9) mpcpAdminCtrl(16)};

bMPCPAdminControl BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.2.1;

30A.8.1 MAU, formal definition

Change the package definitions in 30A.8.1 as follows:

oMAU MANAGED OBJECT CLASS

DERIVED FROM “CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 : 1992”:top;
CHARACTERIZED BY
pMAUBasic PACKAGE
ATTRIBUTES aMAUID GET,

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 189 of 717

```
                                    aMAUType                    GET-REPLACE,
                                    aMAUTypeList                GET,
                                    aMediaAvailable             GET,
                                    aJabber                     GET,
                                    aMAUAdminState              GET;
            NOTIFICATIONS           nJabber;
            ;
;
CONDITIONAL PACKAGES
            pMAUControl             PACKAGE
            ACTIONS                 acResetMAU,
                                    acMAUAdminControl;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) mauControlPkg(13)};
PRESENT IF      The pMAUControl package is implemented.,
            pMediaLossTracking      PACKAGE
ATTRIBUTESaLoseMediaCounterGET;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) mediaLossTrackingPkg(14)};
PRESENT IF      MAU TypeValue = AUI or if the pMediaLossTracking package is implemented.,
            pBroadbandDTEMAU        PACKAGE
            ATTRIBUTES              aBbMAUXmitRcvSplitType      GET,
                                    aBroadbandFrequencies       GET;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) broadbandMAUPkg(15)};
PRESENT IF      The MAU is of type 10BROAD36.,
            p100MbpsMonitor         PACKAGE
            ATTRIBUTES              aFalseCarriers              GET,
                                    aIdleErrorCount             GET;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) mau100MbpsMonitor(16)};
PRESENT IF      The MAU is capable of 100 Mb/s operation.;,
            pPCSMonitor             PACKAGE
            ATTRIBUTES              aPCSCodingViolation         GET;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) pcsMonitor(35)};
PRESENT IF      The MAU PCS code error monitoing capability is implemented.,
            pFECMonitor             PACKAGE
            ATTRIBUTES              aFECAbility                 GET,
                                    aFECmode                    GET-REPLACE,
                                    aFECCorrectedBlocks         GET,
                                    aFECUncorrectableBlocks     GET;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                package(4) fecMonitor(30)};
PRESENT IF      The MAU is capable of FEC operation.;
REGISTERED AS   {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30)
                managedObjectClass(3) mauObjectClass(6)};
```

30A.8.2 MAU attributes

Insert the following text at the end of 30A.8.2:

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 190 of 717

aPCSCodingViolation **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPCSCodingViolation;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pcsCodingViolation(292)};

bPCSCodingViolation **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.12;

aFECAbility **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.FECMode;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bFECAbility;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) fecAbility(313)};

bFECAbility **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.13;

aFECmode **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.FECMode;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bFECmode;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) fecMode(314)};

bFECmode **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.14;

aFECCorrectedBlocks **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bFECCorrectedBlocks;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) fecCorrectedBlocks(293)};

bFECCorrectedBlocks **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.15;

aFECUncorrectableBlocks **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bFECUncorrectableBlocks;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 191 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) fecUncorrectableBlocks(294)};

bFECUncorrectableBlocks BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.16;

30A.15.2 WIS attributes

Change the aWISID attribute in subclause 30A.15.2 as follows (inserted by IEEE Std 802.3ae-2002):

aWISID ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY;
BEHAVIOUR bWISID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) wisID(181~~2~~)};

Insert the following new subclauses after the 30A.18:

30A.19 OMP entity formal definition

oOMP MANAGED OBJECT CLASS

DERIVED FROM "CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992":top;
CHARACTERIZED BY
pOMPBasic PACKAGE
ATTRIBUTES aOMPEmulationID GET,
aOMPEmulationType GET,
aSLDErrors GET,
aCRC8Errors GET;
;
;
CONDITIONAL PACKAGES
pOMPOLTMonitor PACKAGE
ATTRIBUTES aGoodLLID GET,
aONUPONcastLLID GET,
aOLTPONcastLLID GET,
aBadLLID GET;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) package(4) oMPError(37)};
PRESENT IF This package is mandatory for a OLT and optional for a ONU.;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) managedObjectClass(3) ompObjectClass(19)};

nbOMP-MACEntity NAME BINDING

SUBORDINATE OBJECT CLASS oOMP;
NAMED BY SUPERIOR OBJECT CLASS oMACEntity;
WITH ATTRIBUTE aOMPEmulationID;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 192 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) nameBinding(6) omp-macEntity(36)};

30A.19.1 OMP attributes

aOMPEmulationID **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOMPEmulationID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) ompEmulationID(231)};

bOMPEmulationID **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.1;

aOMPEmulationType **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OMPEmulationType;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOMPEmulationType;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) ompEmulationType(232)};

bOMPEmulationType **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.2;

aSLDErrors **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bSLDErrors;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) sldErrors(233)};

bSLDErrors **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.3;

aCRC8Errors **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bCRC8Errors;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) crc8Errors(234)};

bCRC8Errors **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.4;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 193 of 717

aGoodLLID **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bGoodLLID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) goodLLID(341)};

bGoodLLID **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.5;

aONUPONcastLLID **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bONUPONcastLLID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) onuPONcastLLID(342)};

bONUPONcastLLID **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.6;

aOLTPONcastLLID **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOLTPONcastLLID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oltPONcastLLID(343)};

bOLTPONcastLLID **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.7;

aBadLLID **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bBadLLID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) badLLID(235)};

bBadLLID **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.7.1.8;

30A.20 OAM entity managed object class

30A.20.1 OAM entity formal definition

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 194 of 717

oOAM **MANAGED OBJECT CLASS**

DERIVED FROM		“CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992”:top;	
CHARACTERIZED BY			
	pOAMBasic	PACKAGE	
		ATTRIBUTES	aOAMID GET,
			aOAMAdminState GET,
			aOAMMode GET-REPLACE,
			aOAMDiscoveryState GET,
			aOAMRemoteMACAddress GET,
			aOAMLocalConfiguration GET,
			aOAMRemoteConfiguration GET,
			aOAMLocalPDUConfiguration GET,
			aOAMRemotePDUConfiguration GET,
			aOAMLocalFlagsField GET,
			aOAMRemoteFlagsField GET,
			aOAMLocalRevision GET,
			aOAMRemoteRevision GET,
			aOAMLocalState GET,
			aOAMRemoteState GET,
			aOAMRemoteVendorOUI GET,
			aOAMRemoteVendorSpecificInfo GET,
			aOAMUnsupportedCodesTx GET,
			aOAMUnsupportedCodesRx GET,
			aOAMInformationTx GET,
			aOAMInformationRx GET,
			aOAMUniqueEventNotificationTx GET,
			aOAMDuplicateEventNotificationTx GET,
			aOAMUniqueEventNotificationRx GET,
			aOAMDuplicateEventNotificationRx GET,
			aOAMLoopbackControlTx GET,
			aOAMLoopbackControlRx GET,
			aOAMVariableRequestTx GET,
			aOAMVariableRequestRx GET,
			aOAMVariableResponseTx GET,
			aOAMVariableResponseRx GET,
			aOAMOrganizationSpecificTx GET,
			aOAMOrganizationSpecificRx GET,
			aOAMLocalErrSymPeriodConfig GET,
			aOAMLocalErrSymPeriodEvent GET,
			aOAMLocalErrFrameConfig GET,
			aOAMLocalErrFrameEvent GET,
			aOAMLocalErrFramePeriodConfig GET,
			aOAMLocalErrFramePeriodEvent GET,
			aOAMLocalErrFrameSecsSummaryConfig GET,
			aOAMLocalErrFrameSecsSummaryEvent GET,
			aOAMRemoteErrSymPeriodEvent GET,
			aOAMRemoteErrFrameEvent GET,
			aOAMRemoteErrFramePeriodEvent GET,
			aOAMRemoteErrFrameSecsSummaryEvent GET,
			aFramesLostDueToOAMError GET;
		ACTIONS	acOAMAdminControl;
	;		
;			

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 195 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) managedObjectClass(3) oamObjectClass(20)};

nbOAM-aggregator NAME BINDING

SUBORDINATE OBJECT CLASS oOAM;
NAMED BY SUPERIOR OBJECT CLASS oAggregator;
WITH ATTRIBUTE aOAMID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) nameBinding(6) oam-aggregator(35)};

30A.20.2 OAM entity attributes

aOAMID ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamID(236)};

bOAMID BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.1;

aOAMAdminState ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PortAdminState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMAdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamAdminState(237)};

bOAMAdminState BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.2;

aOAMMode ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMMode;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMMode;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamMode(238)};

bOAMMode BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.3;

aOAMDiscoveryState ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMDiscoveryState;
MATCHES FOR EQUALITY, ORDERING;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 196 of 717

BEHAVIOUR bOAMDiscoveryState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamDiscoveryState(333)};

bOAMDiscoveryState BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.4;

aOAMRemoteMACAddress ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MACAddress;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteMACAddress;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteMACAddress(239)};

bOAMRemoteMACAddress BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.5;

aOAMLocalConfiguration ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMConfig;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalConfiguration;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalConfiguration(334)};

bOAMLocalConfiguration BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.6;

aOAMRemoteConfiguration ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMConfig;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteConfiguration;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteConfiguration(240)};

bOAMRemoteConfiguration BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.7;

aOAMLocalPDUConfiguration ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalPDUConfiguration;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalPDUConfiguration(335)};

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 197 of 717

bOAMLocalPDUConfiguration BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.8;

aOAMRemotePDUConfiguration ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemotePDUConfiguration;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemotePDUConfiguration(241)};

bOAMRemotePDUConfigurationBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.9;

aOAMLocalFlagsField ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMFlagsField;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalFlagsField;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalFlagsField(242)};

bOAMLocalFlagsField BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.10;

aOAMRemoteFlagsField ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMFlagsField;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteFlagsField;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteFlagsField(243)};

bOAMRemoteFlagsField BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.11;

aOAMLocalRevision ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalRevision;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalRevision(336)};

bOAMLocalRevision BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.12;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 198 of 717

aOAMRemoteRevision **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteRevision;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteRevision(244)};

bOAMRemoteRevision **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.13;

aOAMLocalState **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalState(337)};

bOAMLocalState **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.14;

aOAMRemoteState **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteState(245)};

bOAMRemoteState **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.15;

aOAMRemoteVendorOUI **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OUI;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteVendorOUI;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteVendorOUI(246)};

bOAMRemoteVendorOUI **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.16;

aOAMRemoteVendorSpecificInfo **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOamRemoteVendorSpecificInfo;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 199 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteVendorSpecificInfo(247)};

bOamRemoteVendorSpecificInfo BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.17;

aOAMUnsupportedCodesTx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMUnsupportedCodesTx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamUnsupportedCodesTx(338)};

bOAMUnsupportedCodesTx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.18;

aOAMUnsupportedCodesRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMUnsupportedCodesRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamUnsupportedCodesRx(250)};

bOAMUnsupportedCodesRx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.19;

aOAMInformationTx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMInformationTx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamInformationTx(251)};

bOAMInformationTx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.20;

aOAMInformationRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMInformationRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamInformationRx(252)};

bOAMInformationRx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.21;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 200 of 717

aOAMUniqueEventNotificationTx ATTRIBUTE

DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMUniqueEventNotificationTx;
REGISTERED AS	{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamUniqueEventNotificationTx(339)};

bOAMUniqueEventNotificationTxBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.22;

aOAMDuplicateEventNotificationTx ATTRIBUTE

DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMDuplicateEventNotificationTx;
REGISTERED AS	{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamDuplicateEventNotificationTx(340)};

bOAMDuplicateEventNotificationTxBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.23;

aOAMUniqueEventNotificationRx ATTRIBUTE

DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMUniqueEventNotificationRx;
REGISTERED AS	{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamUniqueEventNotificationRx(254)};

bOAMUniqueEventNotificationRxBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.24;

aOAMDuplicateEventNotificationRx ATTRIBUTE

DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMDuplicateEventNotificationRx;
REGISTERED AS	{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamDuplicateEventNotificationRx(255)};

bOAMDuplicateEventNotificationRxBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.25;

aOAMLoopbackControlTx ATTRIBUTE

DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMLoopbackControlTx;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 201 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLoopbackControlTx(256)};

bOAMLoopbackControlTx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.26;

aOAMLoopbackControlRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLoopbackControlRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLoopbackControlRx(257)};

bOAMLoopbackControlRx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.27;

aOAMVariableRequestTx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMVariableRequestTx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamVariableRequestTx(258)};

bOAMVariableRequestTx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.28;

aOAMVariableRequestRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMVariableRequestRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamVariableRequestRx(259)};

bOAMVariableRequestRx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.29;

aOAMVariableResponseTx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMVariableResponseTx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamVariableResponseTx(260)};

bOAMVariableResponseTx BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.30;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 202 of 717

aOAMVariableResponseRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMVariableResponseRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamVariableResponseRx(261)};

bOAMVariableResponseRx BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.6.1.31;

aOAMOrganizationSpecificTx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMOrganizationSpecificTx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamOrganizationSpecificTx(262)};

bOAMOrganizationSpecificTx BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.6.1.32;

aOAMOrganizationSpecificRx ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMOrganizationSpecificRx;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamOrganizationSpecificRx(263)};

bOAMOrganizationSpecificRx BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.6.1.33;

aOAMLocalErrSymPeriodConfig ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrSymPeriodConfig;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrSymPeriodConfig(264)};

bOAMLocalErrSymPeriodConfigBEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.6.1.34;

aOAMLocalErrSymPeriodEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrSymPeriodEvent;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 203 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrSymPeriodEvent(265)};

bOAMLocalErrSymPeriodEvent BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.35;

aOAMLocalErrFrameConfig ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFrameConfig;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFrameConfig(266)};

bOAMLocalErrFrameConfig BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.36;

aOAMLocalErrFrameEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFrameEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFrameEvent(267)};

bOAMLocalErrFrameEvent BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.37;

aOAMLocalErrFramePeriodConfig ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFramePeriodConfig;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFramePeriodConfig(268)};

bOAMLocalErrFramePeriodConfigBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.38;

aOAMLocalErrFramePeriodEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFramePeriodEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFramePeriodEvent(269)};

bOAMLocalErrFramePeriodEventBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.39;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 204 of 717

aOAMLocalErrFrameSecsSummaryConfigATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFrameSecsSummaryConfig;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFrameSecsSummaryConfig(270)};

bOAMLocalErrFrameSecsSummaryConfigBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.40;

aOAMLocalErrFrameSecsSummaryEventATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMLocalErrFrameSecsSummaryEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamLocalErrFrameSecsSummaryEvent(271)};

bOAMLocalErrFrameSecsSummaryEventBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.41;

aOAMRemoteErrSymPeriodEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteErrSymPeriodEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteErrSymPeriodEvent(272)};

bOAMRemoteErrSymPeriodEventBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.42;

aOAMRemoteErrFrameEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteErrFrameEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteErrFrameEvent(273)};

bOAMRemoteErrFrameEvent BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.43;

aOAMRemoteErrFramePeriodEvent ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteErrFramePeriodEvent;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 205 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteErrFramePeriodEvent(274)};

bOAMRemoteErrFramePeriodEventBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.44;

aOAMRemoteErrFrameSecsSummaryEventATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOAMRemoteErrFrameSecsSummaryEvent;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) oamRemoteErrFrameSecsSummaryEvent(275)};

bOAMRemoteErrFrameSecsSummaryEventBEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.45;

aFramesLostDueToOAMError ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bFramesLostDueToOAMError;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) framesLostDueToOAMError(276)};

bFramesLostDueToOAMError BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.1.46;

30A.20.3 OAM actions

acOAMAdminControl ACTION

BEHAVIOUR bOAMAdminControl;
MODE CONFIRMED;
WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.AdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) action(9) oamAdminControl(15)};

bOAMAdminControl BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.6.2.1;

30A.21 PAF managed object class

30A.21.1 PAF formal definition

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 206 of 717

oPAF **MANAGED OBJECT CLASS**

DERIVED FROM "CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992":top;
CHARACTERIZED BY
pPAFBasic PACKAGE
ATTRIBUTES aPAFID GET,
aPhyEnd GET,
aPHYCurrentStatus GET,
aPAFSupported GET;
;
;
CONDITIONAL PACKAGES
pPAFAggregation PACKAGE
ATTRIBUTES aPAFAdminState GET-REPLACE,
aLocalPAFCapacity GET,
aLocalPMEAvailable GET,
aLocalPMEAggregate GET,
aRemotePAFSupported GET,
aRemotePAFCapacity GET,
aRemotePMEAggregate GET;
REGISTERED AS{iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) package(4) pafAggregation(38)};
PRESENT IF The PAF aggregation capability is implemented.;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) managedObjectClass(3) pafObjectClass(24)};

nbPAF-PHYEntity **NAME BINDING**

SUBORDINATE OBJECT CLASS oPAF;
NAMED BY SUPERIOR OBJECT CLASS oPHYEntity;
WITH ATTRIBUTE aPAFID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) name-Binding(6) paf-phyEntity(39)};

aPAFID **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPAFID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pafID(344)};

bPAFID **BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.11.1.1.1;

aPhyEnd **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PHYEnd;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPhyEnd;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) phyEnd(326)};

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 207 of 717

bPhyEnd BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.2;

aPHYCurrentStatus ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PHYCurrentState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPHYCurrentStatus;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) phyCurrentStatus(296)};

bPHYCurrentStatus BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.3;

aPAFSupported ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.TrueFalse;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPAFSupported;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pAFSupported(304)};

bPAFSupported BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.4;

aPAFAdminState ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PortAdminState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPAFAdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pAFAdminState(305)};

bPAFAdminState BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.5;

aLocalPAFCapacity ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bLocalPAFCapacity;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) localPAFCapacity(327)};

bLocalPAFCapacity BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.6;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 208 of 717

aLocalPMEAvailable **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bLocalPMEAvailable;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) localPMEAvailable(306)};

bLocalPMEAvailable **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.7;

aLocalPMEAggregate **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bLocalPMEAggregate;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) localPMEAggregate(307)};

bLocalPMEAggregate **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.8;

aRemotePAFSupported **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.TrueFalse;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bRemotePAFSupported;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) remotePAFSupported(328)};

bRemotePAFSupported **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.9;

aRemotePAFCapacity **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bRemotePAFCapacity;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) remotePAFCapacity(329)};

bRemotePAFCapacity **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.10;

aRemotePMEAggregate **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bRemotePMEAggregate;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 209 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) remotePMEAggregate(310)};

bRemotePMEAggregate BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.1.1.11;

30A.22 PME managed object class

30A.22.1 PME formal definition

oPME MANAGED OBJECT CLASS

DERIVED FROM “CCITT Rec. X.721 (1992) | ISO/IEC 10165-2: 1992”:top;
CHARACTERIZED BY
pPMEBasic PACKAGE
ATTRIBUTES aPMEID GET,
aPMEAdminState GET-REPLACE,
aPMEStatus GET,
aPMESNRMgn GET,
aTCCodingViolations GET,
aProfileSelect GET-REPLACE,
aOperatingProfile GET,
aPMEFECCorrectedBlocks GET,
aPMEFECUncorrectableBlocks GET;
;
;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) managedObjectClass(3) pmeObjectClass(25)};

nbPME-PAF NAME BINDING

SUBORDINATE OBJECT CLASS oPME;
NAMED BY SUPERIOR OBJECT CLASS oPAF;
WITH ATTRIBUTE aPAFID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) name-Binding(6) pme-paf(40)};

aPMEID ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMEID;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeID(330)};

bPMEID BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.1;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 210 of 717

aPMEAdminState **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PortAdminState;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMEAdminState;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeAdminState(345)};

bPMEAdminState **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.2;

aPMEStatus **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PMEStatus;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMEStatus;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeStatus(346)};

bPMEStatus **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.3;

aPMESNRMgn **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMESNRMgn;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeSNRMgn(331)};

bPMESNRMgn **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.4;

aTCCodingViolations **ATTRIBUTE**

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bTCCodingViolations;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) tcCodingViolations(332)};

bTCCodingViolations **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.5;

aProfileSelect **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PMEProfile;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bProfileSelect;

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 211 of 717

REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) profileSelect(347)};

bProfileSelect BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.6;

aOperatingProfile ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PMEOperatingProfile;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bOperatingProfile;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) operatingProfile(348)};

bOperatingProfile BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.7;

aPMEFECCorrectedBlocks ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMEFECCorrectedBlocks;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeFECCorrectedBlocks(349)};

bPMEFECCorrectedBlocks BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.8;

aPMEFECUncorrectableBlocks ATTRIBUTE

DERIVED FROM aCMCounter;
MATCHES FOR EQUALITY, ORDERING;
BEHAVIOUR bPMEFECUncorrectableBlocks;
REGISTERED AS {iso(1) member-body(2) us(840) ieee802dot3(10006) csmacdmgt(30) attribute(7) pmeFECUncorrectableBlocks(350)};

bPMEFECUncorrectableBlocks BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.9;

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 212 of 717

Annex 30B

(normative)

GDMO and ASN.1 definitions for management

30B.2 ASN.1 module for CSMA/CD managed objects

Change the following ASN.1 definitions of the ASN.1 module:

```
PhyTypeValue::= ENUMERATED {
    other                (1),    --undefined
    unknown              (2),    --initializing, true state or type not yet known
    none                 (3),    --MII present and nothing connected
    10 Mb/s              (7),    --Clause 7 10 Mb/s Manchester
    100BASE-T4           (23),   --Clause 23 100 Mb/s 8B/6T
    100BASE-X            (24),   --Clause 24 100 Mb/s 4B/5B
    100BASE-T2           (32),   --Clause 32 100 Mb/s PAM5x5
    1000BASE-X           (36),   --Clause 36 1000 Mb/s 8B/10B
    1000BASE-T           (40)    --Clause 40 1000 Mb/s 4D-PAM5
    10GBASE-X            (48)    --Clause 48 10 Gb/s 4
    10GBASE-R            (49)    --Clause 49 10 Gb/s 64B/66B
    10GBASE-W            (50),   --Clause 49 10 Gb/s 64B/66B and Clause 50 WIS
    10PASS-TS            (62),   --Clause 61 2.5 Mb/s to 100 Mb/s 64/65-octet
    2BASE-TL             (63)    --Clause 61 0.5 Mb/s to 5.5 Mb/s 64/65-octet
    }
TypeValue::= ENUMERATED {
    global               (0),    --undefined
    other                (1),    --undefined
    unknown              (2),    --initializing, true state not yet known
    AUI                  (7),    --no internal MAU, view from AUI
    2BASE-TL             (63),   --Voice grade UTP PHY as specified in Clause 61 and 63
    10BASE5              (8),    --Thick coax MAU as specified in Clause 8
    FOIRL                (9),    --FOIRL MAU as specified in 9.9
    10BASE2              (10),   --Thin coax MAU as specified in Clause 10
    10BROAD36            (11),   --Broadband DTE MAU as specified in Clause 11
    10BASE-T             (14),   --UTP MAU as specified in Clause 14, duplex mode
                                   unknown
    10BASE-THD           (141),  --UTP MAU as specified in Clause 14, half duplex mode
    10BASE-TFD           (142),  --UTP MAU as specified in Clause 14, full duplex mode
    10PASS-TS            (62),   --Voice grade UTP PHY as specified in Clause 61 and 62
    10BASE-FP            (16),   --Passive fiber MAU as specified in Clause 16
    10BASE-FB            (17),   --Synchronous fiber MAU as specified in Clause 17
    10BASE-FL            (18),   --Asynchronous fiber MAU as specified in Clause 18, duplex
                                   mode unknown
    10BASE-FLHD          (181),  --Asynchronous fiber MAU as specified in Clause 18, half
                                   duplex mode
    10BASE-FLFD          (182),  --Asynchronous fiber MAU as specified in Clause 18, full
                                   duplex mode
    100BASE-T4           (23),   --Four-pair Category 3 UTP as specified in Clause 23
    100BASE-TX           (25),   --Two-pair Category 5 UTP as specified in Clause 25, duplex
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 213 of 717

mode unknown

100BASE-TXHD (251), --Two-pair Category 5 UTP as specified in Clause 25, half duplex mode

100BASE-TXFD (252), --Two-pair Category 5 UTP as specified in Clause 25, full duplex mode

100BASE-BX10D (581), --One-fiber OLT PHY as specified in Clause 58

100BASE-BX10U (582), --One-fiber ONU PHY as specified in Clause 58

100BASE-FX (26), --X fiber over PMD as specified in Clause 26, duplex mode unknown

100BASE-FXHD (261), --X fiber over PMD as specified in Clause 26, half duplex mode

100BASE-FXFD (262), --X fiber over PMD as specified in Clause 26, full duplex mode

100BASE-LX10 (58), --Two-fiber PHY as specified in Clause 58

100BASE-T2 (32), --Two-pair Category 3 UTP as specified in Clause 32, duplex mode unknown

100BASE-T2HD (321), --Two-pair Category 3 UTP as specified in Clause 32, half duplex mode

100BASE-T2FD (322), --Two-pair Category 3 UTP as specified in Clause 32, full duplex mode

1000BASE-X (36), --X PCS/PMA as specified in Clause 36 over unknown PMD, duplex mode unknown

1000BASE-BX10D (591), --One-fiber OLT PHY as specified in Clause 59

1000BASE-BX10U (592), --One-fiber ONU PHY as specified in Clause 59

1000BASE-XHD (361), --X PCS/PMA as specified in Clause 36 over unknown PMD, half duplex mode

1000BASE-XFD (362), --X PCS/PMA as specified in Clause 36 over unknown PMD, full duplex mode

1000BASE-LX (381), --X fiber over long-wavelength laser PMD as specified in Clause 38, duplex mode unknown

1000BASE-LXHD (382), --X fiber over long-wavelength laser PMD as specified in Clause 38, half duplex mode

1000BASE-LXFD (383), --X fiber over long-wavelength laser PMD as specified in Clause 38, full duplex mode

1000BASE-LX10 (59), --Two-fiber 10 km PHY as specified in Clause 59

1000BASE-PX10D (601), --One-fiber OMP OLT 10 km PHY as specified in Clause 60

1000BASE-PX10U (602), --One-fiber OMP ONU 10 km PHY as specified in Clause 60

1000BASE-PX20D (603), --One-fiber OMP OLT 20 km PHY as specified in Clause 60

1000BASE-PX20U (604), --One-fiber OMP ONU 20 km PHY as specified in Clause 60

1000BASE-SX (384), --X fiber over short-wavelength laser PMD as specified in Clause 38, duplex mode unknown

1000BASE-SXHD (385), --X fiber over short-wavelength laser PMD as specified in Clause 38, half duplex mode

1000BASE-SXFD (386), --X fiber over short-wavelength laser PMD as specified in Clause 38, full duplex mode

1000BASE-CX (39), --X copper over 150-Ohm balanced cable PMD as specified in Clause 39, duplex mode unknown

1000BASE-CXHD (391), --X copper over 150-Ohm balanced cable PMD as specified in Clause 39, half duplex mode

1000BASE-CXFD (392), --X copper over 150-Ohm balanced cable PMD as specified in Clause 39, full duplex mode

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 214 of 717

```
        1000BASE-T          (40),   --Four-pair Category 5 UTP PHY as specified in Clause 40,
                                    duplex mode unknown
        1000BASE-THD        (401),  --Four-pair Category 5 UTP PHY as specified in Clause 40,
                                    half duplex mode
        1000BASE-TFD        (402),  --Four-pair Category 5 UTP PHY as specified in Clause 40,
                                    full duplex mode
        10GBASE-X           (48),   --X PCS/PMA as specified in Clause 48 over undefined PMD
        10GBASE-LX4         (481),  --X fibre over WWDM optics as specified in Clause 53
        10GBASE-CX4         (482),  --X copper over 8 pair 100-Ohm balanced cable as specified in
                                    Clause 54
        10GBASE-R           (49),   --R PCS/PMA as specified in Clause 49 over undefined PMD
        10GBASE-ER          (491),  --R fibre over 1550nm optics as specified in Clause 52
        10GBASE-LR          (492),  --R fibre over 1310nm optics as specified in Clause 52
        10GBASE-SR          (493),  --R fibre over 850nm optics as specified in Clause 52
        10GBASE-W           (50),   --W PCS/PMA as specified in Clauses 49 and 50 over
                                      undefined PMD
        10GBASE-EW          (501),  --W fibre over 1550nm optics as specified in Clause 52
        10GBASE-LW          (502),  --W fibre over 1310nm optics as specified in Clause 52
        10GBASE-SW          (503),  --W fibre over 850nm optics as specified in Clause 52
        802.9a              (99)    --Integrated services MAU as specified in IEEE Std 802.9
                                      ISLAN-16T
        }
```

Insert the following ASN.1 definitions into the ASN.1 module, in appropriate alphabetic sequence:

```
DeferControl::= ENUMERATED {
        unknown             (1),    --defer control mode unknown
        defer control off   (2),    --defer control mode disabled
        defer control on    (3)     --defer control mode enabled
        }

FECMode::= ENUMERATED {
        unknown             (1),    --initializing, true state not yet known
        supported           (2),    --FEC supported
        not supported       (3)     --FEC not supported
        }

Integer8::= INTEGER (0..2^8-1)      --8 bit value

Integer16::= INTEGER (0..2^16-1)    --16 bit value

Integer48::= INTEGER (0..2^48-1)    --48 bit value

Integer64::= INTEGER (0..2^64-1)    --64 bit value

MPCPMode::= ENUMERATED {
        OLT                 (1),    --sublayer operating in OLT mode
        ONU                 (2)     --sublayer operating in ONU mode
        }

MPCPRegState::= ENUMERATED {
        unregistered        (1),    --unregistered
        registering         (2),    --registering
        registered          (3)     --registered
        }

OAMConfig::= BIT STRING (SIZE (5))

OAMDiscoveryState::= ENUMERATED {
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 215 of 717

```
        link fault              (1),
        active send local       (2),
        passive wait            (3),
        send local remote       (4),
        send any                (5)
        }

    OAMErrorConf::= SEQUENCE {
        OAMEventWindow      [1]     Integer64,
        OAMEventThreshold   [2]     Integer64
        }

    OAMErrorEvent::= SEQUENCE {
        OAMEventTimeStamp   [1]     Integer16,
        OAMEventWindow      [2]     Integer64,
        OAMEventThreshold   [3]     Integer64,
        OAMErrors           [4]     Integer64,
        OAMErrorRunTotal    [5]     Integer64,
        OAMEventRunTotal    [6]     Integer32
        }

    OAMFlagsField::= BIT STRING (SIZE (7))

    OAMMode::= ENUMERATED {
        passive             (1),    --passive
        active              (2)     --active
        }

    OAMState::= BIT STRING (SIZE (3))

    OMPEmulationType::= ENUMERATED {
        unknown             (1),    --Initializing, true state or type not yet known
        OLT                 (2),    --Sublayer operating in OLT mode
        ONU                 (3)     --Sublayer operating in ONU mode
        }

    OUI::= OCTETSTRING              -- Length 3 octets

    PHYCurrentState::= ENUMERATED {
        noPMEAssigned       (1),    --no PME assigned in case of PME aggregation
        lossOfFraming       (2),    --one or more PME in aggregation indicates Loss of Framing
        lossOfSignal        (3),    --one or more PME in aggregation indicates Loss of Signal
        lossOfPower         (4),    --one or more PME in aggregation indicates Loss of Power,
                                      10PASS-TS only
        configInitFailure   (5),    --configuration initialization failure
        noPeerPMEPresent    (6),    --one or more PME in aggregation indicates no peer PME
                                      present
        snrMarginViolation  (7),    --one or more PME in aggregation indicates SNR Margin
                                      Violation
        lineAttenViolation  (8)     --one or more PME in aggregation indicates Loop Attenuation
                                      Violation
        }

    PHYEnd::= ENUMERATED {
        subscriber          (1),    --Subscriber mode of operation
        office              (2)     --Office mode of operation
        }

    PMEOperatingProfile::= SEQUENCE {
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 216 of 717

```
        PMEProfileState         [1]     PMEProfileState,
        PMEProfileNumber        [2]     Integer8
        }
    PMEProfile::= SEQUENCE {
        profile1                [1]     Integer8,
        profile2                [2]     Integer8,
        profile3                [3]     Integer8,
        profile4                [4]     Integer8,
        profile4                [5]     Integer8,
        profile4                [6]     Integer8
        }
    PMEProfileState::= ENUMERATED {
        no link                 (1),    --link is not up
        match                   (2),    --link up using a profile
        no match                (3),    --link up not using a profile
        activate failure        (4)     --link activate failure
        }
    PMEStatus::= ENUMERATED {
        down not ready          (1),    --link is down, not ready
        down ready              (2),    --link is down, ready
        initializing            (3),    --link is initializing
        10PASS-TS               (4),    --link is up as 10PASS-TS
        2BASE-TL                (5)     --link is up as 2BASE-TL
        }
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 217 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 218 of 717

Annex 31A

(normative)

MAC Control opcode assignments

Change Annex 31A as follows:

Table 31A–1 shows the currently defined opcode values and interpretations:

Table 31A–1—MAC Control opcodes

Opcode (Hexadecimal)	MAC Control function	Specified in ~~annex~~	Value/comment	Timestamp[a]
00-00	Reserved			
00-01	PAUSE	Annex 31B	Requests that the recipient stop transmitting non-control frames for a period of time indicated by the parameters of this function.	No
00-02	GATE	64	Request that the recipient allow transmission of frames at a time, and for a period of time indicated by the parameters of this function.	Yes
00-03	REPORT	64	Notify the recipient of pending transmission requests as indicated by the parameters of this function.	Yes
00-04	REGISTER_REQ	64	Request that the station be recognized by the protocol as participating in a gated transmission procedure as indicated by the parameters of this function.	Yes
00-05	REGISTER	64	Notify the recipient that the station is recognized by the protocol as participating in a gated transmission procedure as indicated by the parameters of this function.	Yes
00-06	REGISTER_ACK	64	Notify the recipient that the station acknowledges participation in a gated transmission procedure.	Yes
00-0~~2~~7 through FF-FF	Reserved			

[a]The timestamp field is generated by MAC Control and is not exposed through the client interface.

Opcodes are transmitted high-order octet first. Within each octet, bits are transmitted least-significant bit first. Reserved opcodes shall not be used by MAC Control sublayer entities.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 219 of 717

The following tables shows the elements and semantics of the indication_operand_list for MA_CONTROL.indication primitives for each currently defined opcode value in Table 31A–1:

Table 31A–2—PAUSE MAC Control indications

PAUSE (opcode 0x0001)		
indication_operand_list element	**Value**	**Interpretation**
pause_status	paused	Indicates that the PAUSE function is inhibiting transmission of data frames by the MAC client.
	not_paused	Indicates that the PAUSE function is not inhibiting transmission of data frames by the MAC client.

Table 31A–3—GATE MAC Control indications

GATE (opcode 0x0002)		
indication_operand_list element	**Value**	**Interpretation**
start	32 bit	Time when transmission should be initiated.
length	16 bit	Interval of time during which transmission is allowed.
status	arrive	Indicates that a grant has been received for future activation.
	active	Indicates that the GATE function is allowing transmission of frames.
	deactive	Indicates that the GATE function is inhibiting transmission of frames.
force_report	true	The OLT expects the ONU to transmit a REPORT message during the transmission opprtunity identified by start and length fields.
	false	The OLT does not request the ONU to transmit a REPORT message during the transmission opprtunity identified by start and length fields.
discovery	true	This grant is reserved for use during discovery.
	false	This grant is not reserved for use by the discovery process, and is available for use by all traffic.

Table 31A–4—REPORT MAC Control indications

REPORT (opcode 0x0003)		
indication_operand_list element	**Value**	**Interpretation**
RTT	32 bit	Indicates the calculated round trip time for the station, as calculated following the REPORT message reception.
n	Integer	Indicates the number of queue status reports present
report_list	valid[8]	Indicates whether the corresponding status element is present when set to true.
	status[8]	Indicates amount of data waiting in the corresponding queue including the associated transmission overhead.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 220 of 717

Table 31A–5—REGISTER_REQ MAC Control indications

REGISTER_REQ (opcode 0x0004)		
indication_operand_list element	**Value**	**Interpretation**
status	incoming	Indicates that a station is requesting recognition.
	retry	Indicates that the station should reattempt registration.
flags	register	Indicates that the station is requesting to register.
	deregister	Indicates that the station is requesting to deregister.
pending_grants	Integer	Indicates the maximal number of future GATES that can be stored by the GATE function.
RTT	32 bit	Indicates the calculated round trip time for the station, as calculated following the REGISTER_REQ message reception.

Table 31A–6—REGISTER MAC Control indications

REGISTER (opcode 0x0005)		
indication_operand_list element	**Value**	**Interpretation**
SA	48 bit	MAC address of OLT to which registration is being performed.
ID	16 bit	LLID assigned by the OLT for use by the ONU.
status	accepted	Indicates that the requested registration is successful.
	denied	Indicates that the requested registration attempt is denied by the higher-layer-entity.
	deregistered	Indicates that the ONU has been deregistered, i.e., the associated LLID has been deallocated.
	reregistered	Indicates that the ONU is explicitly asked to re-register.

Table 31A–7—REGISTER_ACK MAC Control indications

REGISTER_ACK (opcode 0x0006)		
indication_operand_list element	**Value**	**Interpretation**
SA	48 bit	MAC address of ONU to which registration is being performed.
ID	16 bit	Indicates the LLID allocated to the ONU.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 221 of 717

Table 31A–7—REGISTER_ACK MAC Control indications

REGISTER_ACK (opcode 0x0006)		
indication_operand_list element	**Value**	**Interpretation**
status	accepted	Indicates the station has been recognized as participating in gated transmission.
	denied	Indicates the station has been excluded from participating in gated transmission.
	reset	Indicates the station has been requested to resubmit a registration request.
	deregistered	Indicates that the station will no longer be participating in gated transmission.
RTT	32 bit	Indicates the calculated round trip time for the station, as calculated following the REGISTER_ACK message reception.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 222 of 717

Annex 43B

(normative)

Requirements for support of Slow Protocols

43B.2 Slow Protocol transmission characteristics

Change the following section to read as follows:

Protocols that make use of the addressing and protocol identification mechanisms identified in this Annex are subject to the following constraints:

a) No more than ~~5~~ 10 frames shall be transmitted in any one-second period.

b) The maximum number of Slow Protocols is 10.

NOTE—This is the maximum number of Slow Protocols that use the specified protocol type defined here. That is, there may be more than 10 slow protocols in the universe, but no more than 10 may map to the same Ethernet Length/Type field.

c) The MAC Client data generated by any of these protocols shall be in the normal length range for an IEEE 802.3 MAC frame, as specified in 4.4.2. It is recommended that the maximum length for a Slow Protocol frame be limited to 128 octets.

NOTE—The Slow Protocols specified in Clause 43 (i.e., LACP and Marker) conform to this recommended maximum. The OAM protocol specified in Clause 57 may generate frames greater than 128 octets.

d) PDUs generated by these protocols shall use the Basic and not the Tagged frame format (see Clause 3).

The effect of these restrictions is to restrict the bandwidth consumed and performance demanded by this set of protocols; the absolute maximum traffic loading that would result is ~~50~~ 100 maximum length frames per second per point-to-point link and 100 maximum length frames per ONU for point-to-multipoint ~~link~~ topologies.

43B.4 Protocol identification

Change the fourth row of the following table to read as follows:

Table 43B–3—Slow Protocols subtypes

Protocol Subtype value	Protocol name
0	Unused—Illegal value
1	Link Aggregation Control Protocol (LACP)
2	Marker Protocol
3	~~Reserved for future use~~ Operations, Administration, and Maintenance (OAM)
4	Reserved for future use
5	Reserved for future use
6	Reserved for future use
7	Reserved for future use
8	Reserved for future use
9	Reserved for future use
10	Reserved for future use
11 through 255	Unused—Illegal values

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 223 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 224 of 717

56. Introduction to Ethernet for subscriber access networks

56.1 Overview

Ethernet for subscriber access networks, also referred to as “Ethernet in the First Mile”, or EFM, combines a minimal set of extensions to the IEEE 802.3 Media Access Control (MAC) and MAC Control sublayers with a family of Physical Layers. These Physical Layers include optical fiber and voice grade copper cable Physical Medium Dependent sublayers (PMDs) for point to point (P2P) connections in subscriber access networks. EFM also introduces the concept of Ethernet Passive Optical Networks (EPONs), in which a point to multipoint (P2MP) network topology is implemented with passive optical splitters, along with extensions to the MAC Control sublayer and Reconciliation sublayer as well as optical fiber PMDs to support this topology. In addition, a mechanism for network Operations, Administration and Maintenance (OAM) is included to facilitate network operation and troubleshooting. 100BASE-LX10 extends the reach of 100BASE-X to achieve 10 km over conventional single-mode two-fiber cabling. The relationships between these EFM elements and the ISO/IEC Open System Interconnection (OSI) reference model are shown in Figure 56–1 for point to point topologies, and Figure 56–2 for point to multi-point topologies.


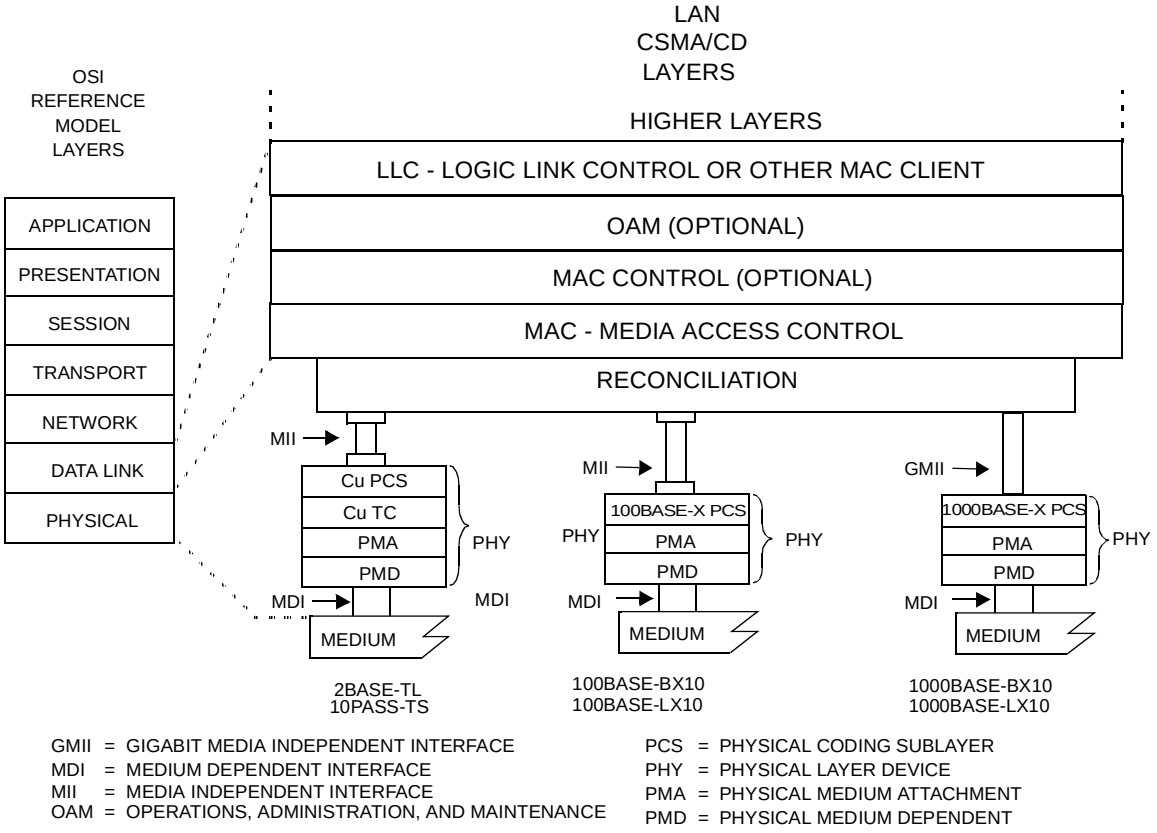


Figure 56–1—Architectural positioning of EFM: P2P Topologies

An important characteristic of EFM is that only full duplex links are supported. A simplified full duplex MAC is defined in Annex 4A for use in EFM networks. P2MP applications must use this simplified full duplex MAC. EFM Copper applications may use either this simplified full duplex MAC or the Clause 4 MAC operating in half duplex mode as described in 61.1.4.1.2. All other EFM P2P applications may use either this simplified full duplex MAC or the Clause 4 MAC operating in full duplex mode.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 225 of 717

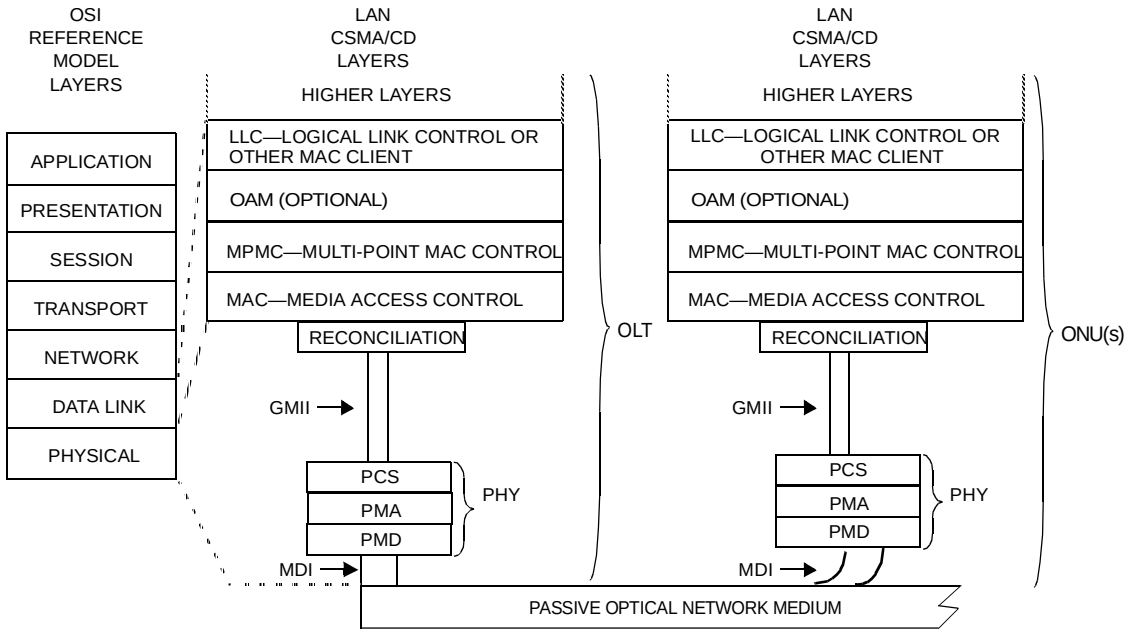

GMII = GIGABIT MEDIA INDEPENDENT INTERFACE
MDI = MEDIUM DEPENDENT INTERFACE
OAM = OPERATIONS, ADMINISTRATION, AND MAINTENANCE
OLT = OPTICAL LINE TERMINAL
ONU = OPTICAL NETWORK UNIT
PCS = PHYSICAL CODING SUBLAYER
PHY = PHYSICAL LAYER DEVICE
PMA = PHYSICAL MEDIUM ATTACHMENT
PMD = PHYSICAL MEDIUM DEPENDENT

Figure 56–2—Architectural positioning of EFM: P2MP Topologies

56.1.1 Summary of P2P sublayers

EFM P2P supports operation at several different bit rates, depending on the characteristics of the underlying medium. In the case of point to point optical fiber media, bit rates of 100 Mb/s and 1000 Mb/s are supported, using the 100BASE-X and 1000BASE-X Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayers defined in 66.1 and 66.2, respectively. In the case of point to point copper, EFM supports a variety of bit rates, depending on the span and the Signal to Noise Ratio (SNR) characteristics of the medium as described in Clauses 61 through 63. 2BASE-TL supports a nominal bit rate of 2 Mb/s at a nominal reach of 2700 meters[2]. 10PASS-TS supports a nominal bit rate of 10 Mb/s at a nominal reach of 750 meters[3].

56.1.2 Summary of P2MP sublayers

For P2MP optical fiber topologies, EFM supports a nominal bit rate of 1000 Mb/s, shared amongst the population of Optical Network Units (ONUs) attached to the P2MP topology. The P2MP PHYs use the 1000BASE-X Physical Coding Sublayer (PCS), the Physical Medium Attachment (PMA) sublayer defined in Clause 65, and an optional FEC function defined in Clause 65.

56.1.2.1 Multi-Point MAC Control Protocol (MPCP)

The Multi-Point MAC Control Protocol (MPCP) uses messages, state machines, and timers, as defined in Clause 64, to control access to a P2MP topology. Every P2MP topology consists of one Optical Line Terminal (OLT) plus one or more ONUs, as shown in Figure 56–2. One of several instances of the MPCP in

[2]Refer to Annex 63B for a more detailed discussion of bit rates and reach.
[3]Refer to Annex 62B for a more detailed discussion of bit rates and reach.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 226 of 717

the OLT communicates with the instance of the MPCP in the ONU. A pair of MPCPs that communicate between the OLT and ONU are a distinct and associated pair.

56.1.2.2 Reconciliation Sublayer (RS) and media independent interfaces

The Clause 22 RS and MII, and Clause 35 RS and GMII, are both employed for the same purpose in EFM, that being the interconnection between the MAC sublayer and the PHY sublayers. Extensions to the Clause 35 RS for P2MP topologies are described in Clause 65. The combination of MPCP and the extension of the Reconciliation Sublayer (RS) for P2P Emulation allows an underlying P2MP network to appear as a collection of point to point links to the higher protocol layers (at and above the MAC Client). It achieves this by prepending a Logical Link Identification (LLID) to the beginning of each data frame, replacing two octets of the preamble. This is described in Clause 65. EFM Copper links use the MII of Clause 22 operating at 100 Mb/s. This is described in 61.1.4.1.2.

56.1.3 Physical layer signaling systems

EFM extends the family of 100BASE-X Physical Layer signaling systems to include 100BASE-LX10 (long wavelength), plus the combination of the 100BASE-BX10-D (Bidirectional long wavelength Downstream) and the 100BASE-BX10-U (Bidirectional long wavelength Upstream), as defined in Clause 58. All of these systems employ the 100BASE-X PCS and PMA as defined in Clause 66.

EFM also extends the family of 1000BASE-X Physical Layer signaling systems to include 1000BASE-LX10 (long wavelength), plus the combination of the 1000BASE-BX10-D (Bidirectional long wavelength Downstream) and the 1000BASE-BX10-U (Bidirectional long wavelength Upstream), as defined in Clause 59. All of these systems employ the 1000BASE-X PCS and PMA as defined in Clause 66. 1000BASE-LX10 is interoperable with 1000BASE-LX on single-mode and multimode fiber, and offers greater reach than 1000BASE-LX on single-mode fiber.

For P2MP topologies, EFM introduces a family of Physical Layer signaling systems which are derived from 1000BASE-X, but which include extensions to the RS, PCS and PMA, along with an optional Forward Error Correction (FEC) capability, as defined in Clause 65. The family of P2MP Physical Layer signaling systems includes the combination of 1000BASE-PX10-D (Passive Optical Network Downstream 10 km), plus 1000BASE-PX10-U (PON Upstream 10 km), and the combination of 1000BASE-PX20-D (PON Downstream 20 km) plus 1000BASE-PX20-U (PON Upstream 20 km), as defined in Clause 60.

For copper cabling, EFM introduces a family of Physical Layer signaling systems. There are two distinct signaling systems specified for copper cabling. Both of them share a set of common functions and interfaces as described in Clause 61. Clause 61 also includes an optional specification that supports combined operation on multiple copper pairs, affording greater data rate capability for a given link span. Underlying these functions, two Physical Layer signaling system specific PMAs and PMDs are described in Clause 62 and Clause 63. Non-loaded cable is a requirement of the signaling methods employed.

For high speed applications, the 10PASS-TS signaling system is defined in Clause 62. 10PASS-TS relies on a technique referred to as Frequency Division Duplexing (FDD) to accomplish full duplex communication on a single wire pair. 10PASS-TS is a passband signaling system derived from the Very-high-speed Digital Subscriber Line (VDSL) standard defined in American National Standard T1.424, using Multiple Carrier Modulation (MCM, also referred to as Discrete Multi-Tone or DMT). This PHY supports a nominal full duplex data rate of 10 Mb/s, hence the identifier 10PASS-TS. For the 10PASS-TS PHY, two subtypes are defined: 10PASS-TS-O and 10PASS-TS-R. A connection can be established only between a 10PASS-TS-O PHY on one end of the voice-grade copper line, and a 10PASS-TS-R PHY on the other end. In public networks, a 10PASS-TS-O PHY is used at a central office (CO), a cabinet or other centralized distribution point; a 10PASS-TS-R PHY is used at the subscriber premises. In private networks, the network administrator will designate one end of each link as the network end. A PHY implementation may be equipped to support both subtypes and provide means to be configured as a 10PASS-TS-O or a 10PASS-TS-R.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 227 of 717

For long distance applications, the 2BASE-TL signaling system is defined in Clause 63. 2BASE-TL is a baseband signaling system derived from the Single-Pair High-Speed Digital Subscriber Line (SHDSL) standards defined by ITU-T. The 2BASE-TL PMD supports a nominal full duplex data rate of approximately 2 Mb/s. As is the case with the 10PASS-TS PHY, the 2BASE-TL PHY consists of two subtypes: 2BASE-TL-O (network end) and 2BASE-TL-R (subscriber end).

System considerations for Ethernet subscriber access networks are described in Clause 67.

Specifications unique to the operation of each physical layer device are shown in Table 56–1.

Table 56–1—Summary of EFM physical layer signaling systems

Name	Location	Rate (Mb/s)	Nominal Reach (km)	Medium	Clause
100BASE-LX10	ONU/OLT[a]	100	10	Two single-mode fibers	58
100BASE-BX10-D	OLT	100	10	One single-mode fiber	58
100BASE-BX10-U	ONU				
1000BASE-LX10	ONU/OLT[a]	1000	10 0.55	Two single-mode fibers Two multimode fibers	59
1000BASE-BX10-D	OLT	1000	10	One single-mode fiber	59
1000BASE-BX10-U	ONU				
1000BASE-PX10-D	OLT	1000	10	One single-mode fiber PON	60
1000BASE-PX10-U	ONU				
1000BASE-PX20-D	OLT	1000	20	One single-mode fiber PON	60
1000BASE-PX20-U	ONU				
10PASS-TS-O	CO[b]	10[c]	0.75[d]	One or more pairs of voice grade copper cable	62
10PASS-TS-R	Subscriber[b]				
2BASE-TL-O	CO[b]	2[e]	2.7[f]	One or more pairs of voice grade copper cable	63
2BASE-TL-R	Subscriber[b]				

[a]Symmetric
[b]In private networks, the network administrator will designate one end of each link as the network end.
[c]Nominal rate stated at the nominal reach. Rate may vary depending on plant. Refer to Annex 62B for more information.
[d]Reach may vary depending on plant. Refer to Annex 62B for further information.
[e]Nominal rate stated at the nominal reach. Rate may vary depending on plant. Refer to Annex 63B for more information.
[f]Reach may vary depending on plant. Refer to Annex 63B for further information.

Table 56–2 specifies the correlation between nomenclature and clauses. A complete implementation conforming to one or more nomenclatures meets the requirements of the corresponding clauses.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 228 of 717

Table 56–2—Nomenclature and clause correlation

Nomenclature	Clause														
	57	58		59		60		61	62	63	64	65		66	
	OAM	100BASE-LX10 PMD	100BASE-BX10 PMD	1000BASE-LX10 PMD	1000BASE-BX10 PMD	1000BASE-PX10 PMD	1000BASE-PX20 PMD	Cu PCS	10PASS-TS PMA & PMD	2BASE-TL PMA & PMD	P2MP MPMC	P2MP RS, PCS, PMA	FEC	100BASE-X PCS, PMA	1000BASE-X PCS, PMA
2BASE-TL	O[a]							M		M					
10PASS-TS	O							M	M						
100BASE-LX10	O	M												M	
100BASE-BX10	O		M											M	
1000BASE-LX10	O			M											M
1000BASE-BX10	O				M										M
1000BASE-PX10-D	O					M					M	M	O		M
1000BASE-PX10-U	O					M					M	M	O		
1000BASE-PX20-D	O						M				M	M	O		M
1000BASE-PX20-U	O						M				M	M	O		

[a]O = Optional, M = Mandatory

56.1.4 Management

Managed objects, attributes, and actions are defined for all EFM components in Clause 30. That Clause consolidates all IEEE 802.3 management specifications so that agents can be managed by existing network management stations with little or no modification to the agent code, regardless of the operating speed of the network.

In addition to the management objects, attributes, and actions defined in Clause 30, EFM introduces Operations, Administration, and Maintenance (OAM) for subscriber access networks to Ethernet. OAM, as defined in Clause 57, includes a mechanism for communicating management information using OAM frames, as well as functions for performing low level diagnostics on a per link basis in an Ethernet subscriber access network.

56.1.5 Unidirectional transmission

In contrast to previous editions of 802.3, in certain circumstances a DTE is allowed to transmit frames while not receiving a satisfactory signal. It is necessary for a 1000BASE-PX-D OLT to do this to bring a PON into operation (although it is highly inadvisable for a 1000BASE-PX-U ONU to transmit without receiving). Clause 66 describes optional modifications to the 100BASE-X PHY, 1000BASE-X PHY and 10GBASE RS so that a DTE may signal remote fault using OAMPDUs. When unidirectional operation is not enabled, the sublayers in Clause 66 are precisely the same as their equivalents in Clause 24, Clause 36, and Clause 46.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 229 of 717

56.2 State diagrams

State machine diagrams take precedence over text.

The conventions of 1.2 are adopted, along with the extensions listed in 21.5.

56.3 Protocol Implementation Conformance Statement (PICS) proforma

The supplier of a protocol implementation that is claimed to conform to any part of IEEE 802.3, Clauses 57 through 66, demonstrates compliance by completing a Protocol Implementation Conformance Statement (PICS) proforma.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. A PICS is included at the end of each clause as appropriate. Each of the EFM PICS conforms to the same notation and conventions used in 100BASE-T (see 21.6).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 230 of 717

57. Operations, Administration, and Maintenance (OAM)

57.1 Overview

57.1.1 Scope

This clause defines the Operations, Administration, and Maintenance (OAM) sublayer, which provides mechanisms useful for monitoring link operation such as remote fault indication and remote loopback control. In general, OAM provides network operators the ability to monitor the health of the network and quickly determine the location of failing links or fault conditions. The OAM described in this clause provides data link layer mechanisms that complement applications that may reside in higher layers.

OAM information is conveyed in Slow Protocol frames (see Annex 43B) called OAM Protocol Data Units (OAMPDUs). OAMPDUs contain the appropriate control and status information used to monitor, test and troubleshoot OAM-enabled links. OAMPDUs traverse a single link, being passed between peer OAM entities, and as such, are not forwarded by MAC clients (e.g., bridges or switches).

OAM does not include functions such as station management, bandwidth allocation or provisioning functions, which are considered outside the scope of this standard.

For the remainder of this clause, the term OAM is specific to the link level OAM described here.

57.1.2 Summary of objectives and major concepts

This section provides details and functional requirements for the OAM objectives:

a) Remote Failure Indication
   1) A mechanism is provided to indicate to a peer that the receive path of the local DTE is non-operational.
   2) Physical layer devices using Clause 66 may support unidirectional operation that allows OAM remote failure indication during fault conditions.
   3) Subscriber access physical layer devices using Clause 65 support unidirectional operation in the direction from OLT to ONU that allows OAM remote failure indication from OLT during fault conditions.
   4) Physical layer devices other than those listed above do not support unidirectional operation allowing OAM remote failure indication during fault conditions. Some physical layer devices have specific remote failure signaling mechanisms in the physical layer.

b) Remote Loopback—A mechanism is provided to support a data link layer frame-level loopback mode.

c) Link Monitoring
   1) A mechanism is provided to support event notification that permits the inclusion of diagnostic information.
   2) A mechanism is provided to support polling of any variable in the Clause 30 MIB.

d) Miscellaneous
   1) Implementation and activation of OAM is optional.
   2) A mechanism is provided that performs OAM capability discovery.
   3) An extension mechanism is provided and made available for higher layer management applications.

These objectives support a subset of the user-plane OAM requirements found in [B9] Recommendation ITU-T Y.1730—Requirements for OAM functions in Ethernet based networks.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 231 of 717

57.1.3 Summary of non-objectives

This section explicitly lists certain functions that are not addressed by OAM. These functions, while valuable, do not fall within the scope of this standard.

a) Management functions not pertaining to a single link such as protection switching and station management are not covered by this clause. Such functions could be addressed using the extension mechanism.
b) Provisioning and negotiation functions such as bandwidth allocation, rate adaptation and speed/ duplex negotiation are not supported by OAM.
c) Issues related to privacy of OAM data and authentication of OAM entities are beyond the scope of this standard.
d) The ability to set/write remote MIB variables is not supported.

57.1.4 Positioning of OAM within the IEEE 802.3 architecture

OAM comprises an optional sublayer between a superior sublayer (e.g., MAC client or optional Link Aggregation) and a subordinate sublayer (e.g., MAC or optional MAC Control sublayer). Figure 57–1 shows the relationship of the OAM sublayer to the ISO/IEC (IEEE) OSI reference model.

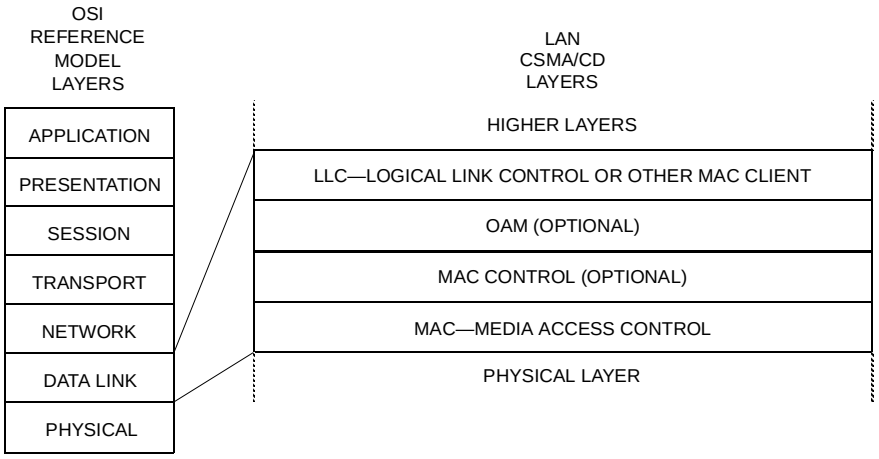


Figure 57–1—OAM sublayer relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model and the IEEE 802.3 CSMA/CD LAN model

57.1.5 Compatibility considerations

57.1.5.1 Application

OAM is intended for point-to-point and emulated point-to-point IEEE 802.3 links. Implementation of OAM functionality is optional. A conformant implementation may implement the optional OAM sublayer for some ports within a system while not implementing it for other ports.

57.1.5.2 Interoperability between OAM capable DTEs

A DTE is able to determine whether or not a remote DTE has OAM functionality enabled. The OAM Discovery mechanism ascertains the configured parameters, such as maximum allowable OAMPDU size, and supported functions, such as OAM remote loopback, on a given link.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 232 of 717

DirecTV Exhibit 1010, Page 233 of 717

57.1.5.3 MAC Control PAUSE

MAC Control PAUSE, commonly referred to as Flow Control as defined in Annex 31B, inhibits the transmission of all MA_DATA.request service primitives, including OAMPDUs. This may delay or prevent the signaling of critical events such as unrecoverable failure conditions and link faults.

57.1.5.4 Interface to MAC Control client

MAC Control clients that generate MA_CONTROL.request service primitives (and which expect MA_CONTROL.indication service primitives in response) are not acted upon by the OAM sublayer. They communicate directly with the MAC Control entity as though no OAM sublayer exists.

57.1.5.5 Frame loss during OAM remote loopback

Invocations of OAM remote loopback may result in data frame loss. OAM remote loopback is an intrusive operation that prevents a link from passing frames between the MAC client of the local DTE and the MAC client of the remote DTE. Refer to 57.2.11 for a complete description of OAM remote loopback operation.

57.1.6 State diagram conventions

Many of the functions specified in this clause are presented in state diagram notation. All state diagrams contained in this clause use the notation and conventions defined in 21.5. In the event of a discrepancy between the text description and the state diagram formalization of a function, the state diagrams take precedence.

57.2 Functional specifications

57.2.1 Interlayer service interfaces

Figure 57–2 depicts the usage of interlayer interfaces by the OAM sublayer.

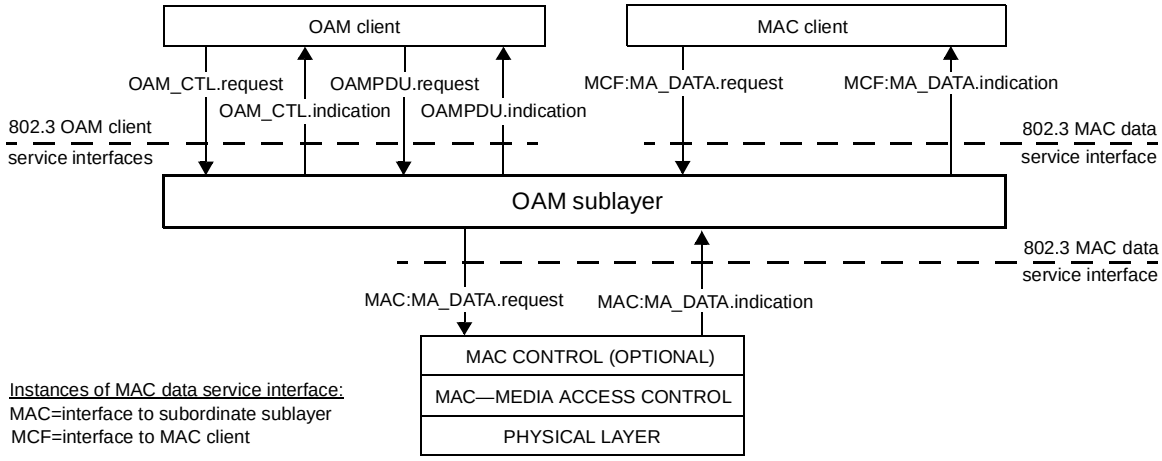


Figure 57–2—OAM sublayer support of interlayer service interfaces

Copyright © 2004 IEEE. All rights reserved.

57.2.2 Principles of operation

OAM employs the following principles and concepts:

a) The OAM sublayer presents a standard IEEE 802.3 MAC service interface to the superior sublayer. Superior sublayers include MAC client and Link Aggregation.
b) The OAM sublayer employs a standard IEEE 802.3 MAC service interface to the subordinate sublayer. Subordinate sublayers include MAC and MAC Control.
c) Frames from superior sublayers are multiplexed within the OAM sublayer with OAMPDUs.
d) The OAM sublayer parses received frames and passes OAMPDUs to the OAM client. In general, non-OAMPDUs are passed to the superior sublayer. When in OAM remote loopback mode, non-OAMPDUs are looped back to the subordinate sublayer. When the peer OAM entity is in OAM remote loopback mode, non-OAMPDUs are discarded by the OAM sublayer so that higher layer functions (e.g., bridging) do not process the looped back frames.
e) Knowledge of the underlying physical layer device is not required by the OAM sublayer.
f) OAMPDUs traverse a single link and are passed between OAM client entities or OAM sublayer entities. OAMPDUs are not forwarded by OAM clients.
g) OAM is extensible through the use of an Organization Specific OAMPDU, Organization Specific Information TLV, and Organization Specific Event TLV. These can be used for functions outside the scope of this standard.

57.2.3 Instances of the MAC data service interface

A superior sublayer such as the MAC client communicates with the OAM sublayer using the standard MAC data service interface specified in Clause 2. Similarly, the OAM sublayer communicates with a subordinate sublayer such as the MAC Control or MAC using the same standard service interfaces.

Since this clause uses two instances of the MAC data service interface, it is necessary to introduce a notation convention so that the reader can be clear as to which interface is being referred to at any given time. A prefix is therefore assigned to each service primitive, indicating which of the two interfaces is being invoked, as depicted in Figure 57–2. The prefixes are as follows:

a) MCF:, for primitives issued on the interface between the superior sublayer and the OAM sublayer (MCF is an abbreviation for MAC client frame)
b) MAC:, for primitives issued on the interface between the underlying subordinate sublayer (e.g., MAC) and the OAM sublayer

57.2.4 Responsibilities of OAM client

The OAM client plays an integral role in establishing and managing OAM on a link. The OAM client enables and configures the OAM sublayer entity. During the OAM Discovery process (see 57.3.2.1), the OAM client monitors received OAMPDUs from the remote DTE and based upon local and remote state and configuration settings allows OAM functionality to be enabled on the link.

After OAM has been established, the OAM client is responsible for adhering to the OAMPDU response rules. For example, the OAM client does not respond to illegal requests such as Variable Request and Loopback Control OAMPDUs from Passive DTEs. The OAM client is also expected to manage the OAM remote loopback mode (see 57.2.11). It does so by reacting to particular OAMPDUs and altering local configuration parameters.

Link events are signalled between peer OAM client entities. The OAM client transfers events by sending and receiving particular OAMPDUs. To increase the likelihood that a specific event is received by the remote DTE, the OAM client may send the event multiple times.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 234 of 717

57.2.5 OAM client interactions

The OAM sublayer entity communicates with the OAM client using the following new interlayer service interfaces:

OAMPDU.request
OAMPDU.indication
OAM_CTL.request
OAM_CTL.indication

The OAMPDU.request, OAMPDU.indication, OAM_CTL.request and OAM_CTL.indication service primitives described in this subclause are mandatory.

57.2.5.1 OAMPDU.request

57.2.5.1.1 Function

This primitive defines the transfer of data from an OAM client entity to a peer OAM client entity.

57.2.5.1.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAMPDU.request      (
                    source_address,
                    flags,
                    code,
                    data
                    )
```

The source_address parameter specifies an individual MAC address. The flags parameter is used to create the Flags field within the OAMPDU to be transmitted. Only the indications corresponding to the Flags field bits 15:3 are contained in the flags parameter since the indications corresponding to Flags field bits 2:0 are contained in the OAM_CTL.request service primitive. The code parameter is used to create the Code field within the OAMPDU to be transmitted. The data parameter is used to create the Data field within the OAMPDU to be transmitted.

57.2.5.1.3 When generated

This primitive is generated by the OAM client entity whenever an OAMPDU is to be transferred to a peer entity. This can be in response to a request from the peer entity or from data generated internally to the OAM client.

57.2.5.1.4 Effect of receipt

The receipt of this primitive will cause the OAM sublayer entity to insert all OAMPDU specific fields, including DA, SA, Length/Type and Subtype, and pass the properly formed OAMPDU to the lower protocol layers for transfer to the peer OAM client entity according to the transmit rules as described in 57.3.2.2.6.

57.2.5.2 OAMPDU.indication

57.2.5.2.1 Function

This primitive defines the transfer of data from an OAM sublayer entity to an OAM client entity.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 235 of 717

57.2.5.2.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAMPDU.indication    (
                     source_address,
                     flags,
                     code,
                     data
                     )
```

The source_address parameter is the MAC source address of the incoming OAMPDU. The flags parameter is the entire Flags field of the incoming OAMPDU. The code parameter is the Code field of the incoming OAMPDU. The data parameter is the Data field of the incoming OAMPDU.

57.2.5.2.3 When generated

This primitive is passed from the OAM sublayer entity to the OAM client entity to indicate the arrival of an OAMPDU to the local OAM sublayer entity that is destined for the OAM client. Such OAMPDUs are reported only if they are validly formed and received without error.

57.2.5.2.4 Effect of receipt

The effect of receipt of this primitive by the OAM client is unspecified.

57.2.5.3 OAM_CTL.request

57.2.5.3.1 Function

This primitive defines the transfer of control information from an OAM client entity to an OAM sublayer entity.

57.2.5.3.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAM_CTL.request      (
                     local_unidirectional,
                     local_link_status,
                     local_dying_gasp,
                     local_critical_event,
                     local_satisfied,
                     remote_state_valid,
                     remote_stable,
                     local_mux_action,
                     local_par_action,
                     information_data
                     )
```

When set, the local_undirectional parameter is used to indicate the sending station supports transmission of OAMPDUs on unidirectional links as supported by some physical coding layers (see 57.2.12).

The local_link_status, local_dying_gasp, and local_critical_event parameters are used to indicate immediate event situations that should be transmitted to the peer OAM entity. The local_link_status parameter is used

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 236 of 717

to convey the status of the link as determined by the underlying physical layer. When set to FAIL, the local_link_status parameter will cause the OAM sublayer entity to transmit an Information OAMPDU with the Link Fault bit of the Flags field set and no Information TLVs. The local_dying_gasp parameter is used to signal a local unrecoverable failure condition. When set, the local_dying_gasp parameter will cause the OAM sublayer to transmit an Information OAMPDU with the Dying Gasp bit of the Flags field set. The local_critical_event parameter is used to signal an unspecified critical link event condition. When set, the local_critical_event parameter will cause the OAM sublayer to transmit an Information OAMPDU with the Critical Event bit of the Flags field set.

The local_satisfied, remote_state_valid, and remote_stable parameters are used in the Discovery process. The local_satisfied parameter is set by the OAM client as a result of comparing its local configuration and the remote configuration found in the received Local Information TLV (see 57.3.2.1).

The local_mux_action and local_par_action parameters are used to control the state of the Multiplexer and Parser functions of the OAM sublayer (see 57.3.3 and 57.3.4).

The information_data parameter contains the Local Information TLV fields, and, if available, the Remote Information and Organization Specific Information TLV fields, to be included in Information OAMPDUs generated by the Transmit process (see 57.3.2.2).

57.2.5.3.3 When generated

This primitive is passed from the OAM client entity to the OAM sublayer to update control information.

57.2.5.3.4 Effect of receipt

The receipt of this primitive will cause the OAM sublayer to generate Information OAMPDUs or update specific fields of future Information OAMPDUs. Also, OAM functions will be re-evaluated based upon any changing control information.

57.2.5.4 OAM_CTL.indication

57.2.5.4.1 Function

This primitive defines the transfer of control information from an OAM sublayer entity to an OAM client entity.

57.2.5.4.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAM_CTL.indication      (
                        local_pdu,
                        local_stable,
                        local_lost_link_timer_done
                        )
```

The local_pdu and local_stable parameters are used by the OAM sublayer to indicate to the OAM client state information in the Discovery process (see 57.3.2.1). The local_lost_link_timer_done parameter is used to convey the expiration of the local_lost_link_timer.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 237 of 717

57.2.5.4.3 When generated

This primitive is passed from the OAM sublayer entity to the OAM client entity to indicate local state information has changed.

57.2.5.4.4 Effect of receipt

The effect of receipt of this primitive by the OAM client is unspecified.

57.2.6 Instances of the OAM internal service interface

The OAM sublayer communicates internally using the OAM internal service interface. Since two instances of the OAM internal service interface are used, it is necessary to introduce a notation convention so that the reader can be clear as to which interface is being referred to at any given time. A prefix is therefore assigned to each service primitive, indicating which of the two interfaces is being invoked (see Figure 57–3). The prefixes are as follows:

a) LBF:, for primitives issued on the interface between the Parser and the Multiplexer (LBF is an abbreviation for Loopback frame).
b) CTL:, for primitives issued on the interface between the Control and other OAM functions (CTL is an abbreviation for Control function).

57.2.7 Internal block diagram

Figure 57–3 depicts the major blocks within the OAM sublayer and their interrelationships.

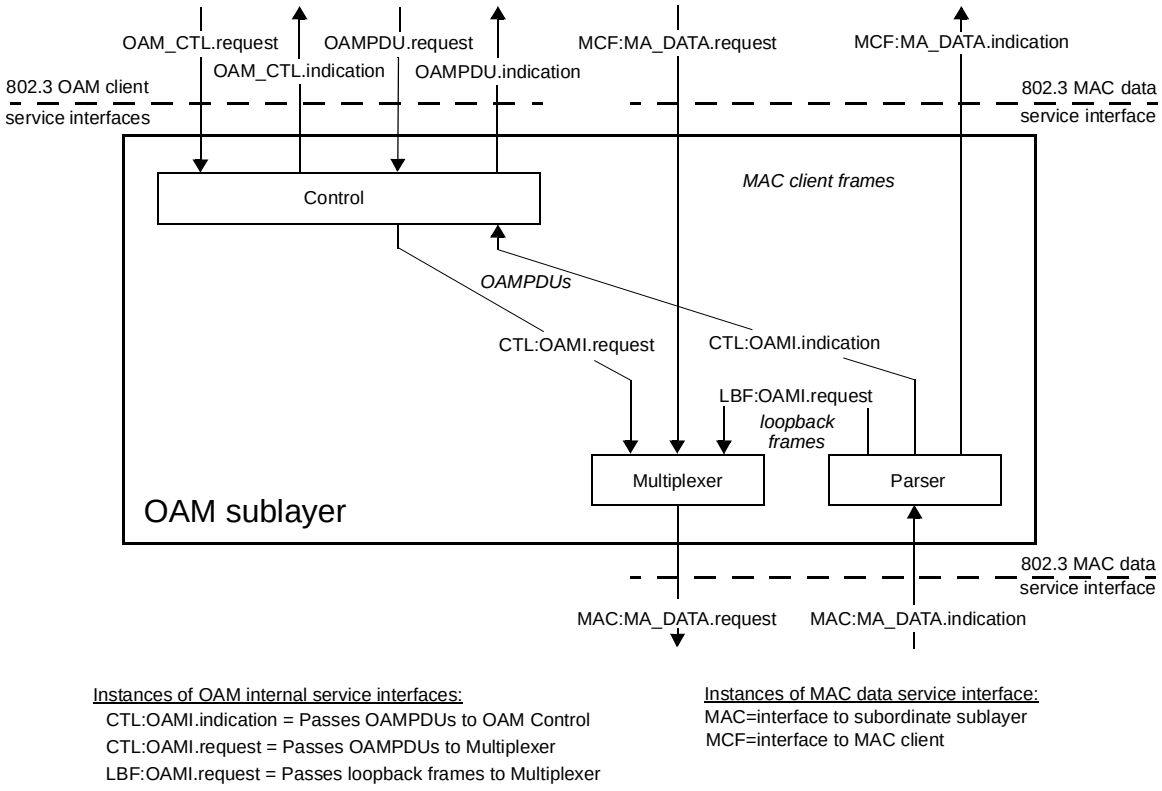


Figure 57–3—OAM sublayer block diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 238 of 717

57.2.8 OAM internal interactions

The OAM sublayer entity employs the following new internal service interfaces:
OAMI.request
OAMI.indication

The OAMI.request and OAMI.indication service primitives described in this subclause are mandatory.

57.2.8.1 OAMI.request

57.2.8.1.1 Function

This primitive defines the transfer of frames to the Multiplexer function internal to the OAM sublayer.

57.2.8.1.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAMI.request        (
                    destination_address,
                    source_address,
                    oam_service_data_unit,
                    frame_check_sequence
                    )
```

The destination_address parameter specifies the Slow Protocols Multicast Address. The source_address parameter must specify an individual MAC address. The oam_service_data_unit parameter specifies the OAM service data unit to be transmitted within the OAM sublayer entity. This parameter includes the Length/Type, Subtype, Flags, Code and Data/Pad fields. There is sufficient information associated with the oam_service_data_unit for the OAM sublayer entity to determine the length of the data unit. The frame_check_sequence parameter, if present, must specify the frame check sequence field for the frame (see 3.2.8).

57.2.8.1.3 When generated

This primitive is generated by the Parser function whenever a frame is intended to be looped back to the remote DTE via the Multiplexer function. This primitive is also generated by the Control function whenever an OAMPDU is to be conveyed to the peer OAM entity via the Multiplexer function, internal to the OAM sublayer.

57.2.8.1.4 Effect of receipt

The receipt of this primitive will cause the Multiplexer function to pass the properly formed frame, subject to Figure 57–7, to the subordinate sublayer via the MAC data service interface (see 57.2.3).

57.2.8.2 OAMI.indication

57.2.8.2.1 Function

This primitive defines the transfer of frames to the Control function internal to the OAM sublayer.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 239 of 717

57.2.8.2.2 Semantics of the service primitive

The semantics of the primitive are as follows:

```
OAMI.indication      (
                     destination_address,
                     source_address,
                     oam_service_data_unit,
                     frame_check_sequence,
                     reception_status
                     )
```

The destination_address parameter is the Slow Protocols Multicast Address as specified by the DA field of the incoming frame. The source_address parameter is an individual address as specified by the SA field of the incoming frame. The oam_service_data_unit parameter specifies the OAM service data unit as received by the internal OAM function. The frame_check_sequence parameter, if present, is the cyclic redundancy check value (see 3.2.8) as specified by the FCS field of the incoming frame. The reception_status parameter is used to pass status information to the internal OAM function. Values for the reception_status parameter can be found in 4.3.2.

57.2.8.2.3 When generated

This primitive is generated whenever the Parser function intends to pass a received OAMPDU to the Control function, internal to the OAM sublayer. Frames are reported only if they are validly formed and received without error.

57.2.8.2.4 Effect of receipt

The receipt of this primitive will cause the Control function to update internal state variables and pass the OAMPDU to the OAM client via the OAMPDU.indication service primitive (see 57.2.5.2).

57.2.9 Modes

DTEs incorporating the OAM sublayer support Active and/or Passive mode. When OAM is enabled, a DTE capable of both Active and Passive modes shall select either Active or Passive. Table 57–1 contains the behaviour of Active and Passive mode DTEs.

Table 57–1—Active and passive mode behaviour

Capability	Active DTE	Passive DTE
Initiates OAM Discovery process	Yes	No
Reacts to OAM Discovery process initiation	Yes	Yes
Required to send Information OAMPDUs	Yes	Yes
Permitted to send Event Notification OAMPDUs	Yes	Yes
Permitted to send Variable Request OAMPDUs	Yes	No
Permitted to send Variable Response OAMPDUs	Yes[a]	Yes
Permitted to send Loopback Control OAMPDUs	Yes	No
Reacts to Loopback Control OAMPDUs	Yes[a]	Yes
Permitted to send Organization Specific OAMPDUs	Yes	Yes

[a]Requires the peer DTE to be in Active mode.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 240 of 717

57.2.9.1 Active mode

DTEs configured in Active mode initiate the exchange of Information OAMPDUs as defined by the Discovery state diagram (see Figure 57–5). Once the Discovery process completes, Active DTEs are permitted to send any OAMPDU while connected to a remote OAM peer entity in Active mode. Active DTEs operate in a limited respect if the remote OAM entity is operating in Passive mode (see Table 57–1). Active devices should not respond to OAM remote loopback commands and variable requests from a Passive peer.

57.2.9.2 Passive mode

DTEs configured in Passive mode do not initiate the Discovery process. Passive DTEs react to the initiation of the Discovery process by the remote DTE. This eliminates the possibility of passive to passive links. Passive DTEs shall not send Variable Request or Loopback Control OAMPDUs.

57.2.10 OAM events

OAM defines a set of events that may impact link operation. OAM contains mechanisms to communicate such events to the remote DTE. The following sections provide an overview of these events and mechanisms.

57.2.10.1 Critical link events

Table 57–2 lists the defined critical link events. Critical link events are carried within the Flags field of each OAMPDU. Refer to 57.4.2.1 for the definition and encoding of the Flags field.

Table 57–2—Critical link event

Critical link event	Description
Link fault	The PHY has determined a fault has occurred in the receive direction of the local DTE.
Dying gasp	An unrecoverable local failure condition has occurred.
Critical event	An unspecified critical event has occurred.

NOTE—The definition of the specific faults comprising the Critical Event, Dying Gasp, and Link Fault flags is implementation specific and beyond the scope of this standard.

57.2.10.2 Link events

Link events are signaled via Link Event TLVs that are defined in 57.5.3. Examples of link events include Errored Symbol Period Event and Errored Frame Event.

57.2.10.3 Local event procedure

Local events are communicated to the remote DTE via one of two mechanisms described below:

a) Critical link events, defined in 57.2.10.1, are communicated to the OAM sublayer via the OAM_CTL.request service primitive. The OAM sublayer shall respond to critical link events by setting or clearing the appropriate bits within the Flags field on any subsequently generated OAMPDUs of any type.
b) The OAM client sends an Event Notification OAMPDU (see 57.4.3.2) containing a Link Event TLV (see Table 57–12) for every event not yet signaled to the remote DTE. The OAM client uses the OAMPDU.request service primitive to send Event Notification OAMPDUs. The OAM client may send duplicate Event Notification OAMPDUs to increase the probability of reception at the remote DTE on deteriorating links.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 241 of 717

57.2.10.4 Remote event procedure

Remote events are detected by the local OAM client via one of two mechanisms described below:

a) Critical link events, defined in 57.2.10.1, shall be detected by the local OAM sublayer via the Flags field of any received OAMPDU. The OAM sublayer signals the Flags field to the OAM client using the OAMPDU.indication service primitive. When receiving Information OAMPDUs indicating Link Fault from the remote DTE, it is recommended that the local OAM client set the local_link_status parameter in the OAM_CTL.request service primitive to OK. This avoids the situation where both ends of a link are in a deadlock condition where neither DTE will be capable of receiving frames.
b) All other link events shall be detected by the local OAM sublayer via the reception of an Event Notification OAMPDU and the subsequent passing of the OAMPDU to the OAM client via the OAMPDU.indication service primitive. The OAM client discards any duplicate received Event Notification OAMPDU.

57.2.11 OAM remote loopback

OAM provides an optional data link layer frame-level loopback mode, which is controlled remotely. OAM remote loopback can be used for fault localization and link performance testing. Statistics from both the local and remote DTE can be queried and compared at any time while the remote DTE is in OAM remote loopback mode. These queries can take place before, during or after loopback frames have been sent to the remote DTE. In addition, an implementation may analyze loopback frames within the OAM sublayer to determine additional information about the health of the link (i.e. determine which frames are being dropped due to link errors). Figure 57–4 shows the path of frames traversing the layer stack of both the local and remote DTEs.

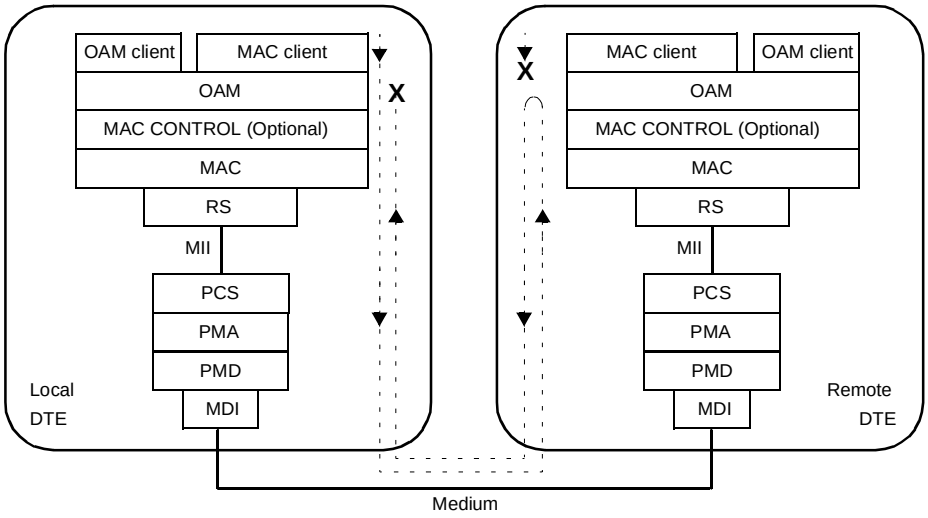


Figure 57–4—OAM remote loopback

57.2.11.1 Initiating OAM remote loopback

To initiate OAM remote loopback, the local OAM client sets its local_mux_action parameter to DISCARD and the local_par_action parameter to DISCARD via the OAM_CTL.request service primitive. The local OAM client sends a Loopback Control OAMPDU (see 57.4.3.5) with the Enable OAM Remote Loopback command. After receiving the Loopback Control OAMPDU, the remote OAM client first sets its local_par_action parameter to LB and its local_mux_action parameter to DISCARD via the OAM_CTL.request service primitive, and then sends an Information OAMPDU with updated state

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 242 of 717

information reflecting its local_par_action set to LB and its local_mux_action parameter set to DISCARD. On the reception of an Information OAMPDU from the remote OAM client with updated state information, the local OAM client sets the local_mux_action to FWD.

If an OAM client has sent a Loopback Control OAMPDU and is waiting for the peer DTE to respond with an Information OAMPDU that indicates it is in OAM remote loopback mode, and that OAM client receives an OAM remote loopback command from the peer device, the following procedures are recommended:

a) If the local DTE has a higher source_address than the peer, it should enter OAM remote loopback mode at the command of its peer.
b) If the local DTE has a lower source_address than the peer, it should ignore the OAM remote loopback command from its peer and continue as if it were never received.

If OAM clients do not follow these guidelines, it may be possible for two OAM clients to issue simultaneous OAM remote loopback commands with indeterminate results.

57.2.11.2 During OAM remote loopback

This section elaborates on Figure 57–4 and describes the flow of frames within the local and remote DTEs and across the link during OAM remote loopback mode. While in OAM remote loopback mode:

a) The local DTE transmits frames from the MAC client and OAMPDUs from the local OAM client or OAM sublayer.
b) Within the remote OAM sublayer entity, every non-OAMPDU, including other Slow Protocol frames, is looped back without altering any field of the frame.
c) OAMPDUs received by the remote DTE are passed to the remote OAM client.
d) Both DTEs are required to send OAMPDUs to the peer DTE in order to keep the Discovery process from re-starting. Both are also permitted to send other OAMPDUs to the peer DTE.
e) Frames received by the local DTE are parsed by the OAM sublayer. OAMPDUs are passed to the OAM client and all other frames are discarded.

57.2.11.3 Exiting OAM remote loopback

When the local DTE wishes to end the OAM remote loopback test, the local OAM client sets its local_mux_action parameter to DISCARD. The local OAM client then sends a Loopback Control OAMPDU with the Disable OAM Remote Loopback command. After receiving a Loopback Control OAMPDU with the Disable OAM Remote Loopback command, the remote OAM client first sets the local_par_action and local_mux_action parameters to FWD via the OAM_CTL.request service primitive and then sends an Information OAMPDU with updated state information reflecting the local_par_action and local_mux_action parameters set to FWD. After receiving an Information OAMPDU with local_par_action and local_mux_action set to FWD, the local OAM client sets its local_par_action and local_mux_action parameters to FWD via the OAM_CTL.request service primitive. The remote Parser resumes passing received non-OAMPDUs up to the MAC client and the local Multiplexer resumes forwarding any frames sourced by the local MAC client.

57.2.11.4 Loss of OAMPDUs during OAM remote loopback

There is the possibility of OAMPDU loss before, during and after OAM remote loopback tests. Of particular interest to the operation of OAM remote loopback is the loss of Loopback Control OAMPDUs and Information OAMPDUs. The local OAM client is able to determine whether or not the remote OAM client received Loopback Control OAMPDUs by examining all received Information OAMPDUs. Since Information OAMPDUs are continually sent to keep the OAM Discovery process from re-starting, the occasional loss of an Information OAMPDU should not adversely impact the operation of OAM remote loopback mode.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 243 of 717

57.2.11.5 Loss of frames during OAM remote loopback

While the link is operating in OAM remote loopback mode, MAC client frames originating from the remote DTE are not transmitted by the remote OAM sublayer entity. Depending upon the remote DTE's implementation of OAM remote loopback, not every frame received is guaranteed to be looped back to the local DTE. Clock differences between the local and remote DTEs may also be a source of lost frames, as the delta in the rate of frames transmitted and received may overrun buffers within either DTE. As always, frames that incur errors during transit will be dropped by the MAC sublayer receiving the frame. Also, OAMPDUs inserted by the remote DTE impacts the bandwidth available to loopback frames. Implementations should take into account the topology (e.g., emulated point-to-point, asymmetrical links) when determining the rate at which to send frames during OAM remote loopback. When a bidirectional link has asymmetric data rates, frame loss may occur if the receive bandwidth is less than the transmit bandwidth.

Loopback frames that are discarded by the OAM sublayer within the remote DTE are counted and, if Clause 30 is present, are reflected in 30.3.6.1.46. This helps determine the health of the link by distinguishing between frames discarded due to link errors and those discarded within the OAM sublayer.

57.2.11.6 Timing considerations for OAM remote loopback

For effective OAM remote loopback operation, it is necessary to place an upper bound on the response time of the remote OAM client after receiving Loopback Control OAMPDUs.

To ensure correct operation, the OAM client needs to, within one second of receiving a Loopback Control OAMPDU with the Enable OAM Remote Loopback command:

a) Set its local_par_action parameter to LB and the local_mux_action to DISCARD via the OAM_CTL.request service primitive.
b) Send an Information OAMPDU.

To ensure correct operation, the OAM client needs to, within one second of receiving a Loopback Control OAMPDU with the Disable OAM Remote Loopback command:

c) Set its local_par_action and local_mux_action parameters to FWD via the OAM_CTL.request service primitive.
d) Send an Information OAMPDU.

It is possible for the remote MAC client to send frames before the remote OAM client can send the Information OAMPDU instructing the local DTE to change its local_par_action variable. As a result these remote MAC client frames will be discarded by the local DTE.

57.2.12 Unidirectional OAM operation

OAM provides an OAMPDU-based mechanism to notify the remote DTE when one direction of a link is non-operational and therefore data transmission is disabled. The ability to operate a link in a unidirectional mode for diagnostic purposes supports the maintenance objective of failure detection and notification.

Some physical layer devices support Unidirectional OAM operation (see 22.2.4.1.12, 22.2.4.2.8, and Clause 66). When a link is operating in Unidirectional OAM mode, the OAM sublayer ensures that only Information OAMPDUs with the Link Fault critical link event indication set and no Information TLVs are sent once per second across the link.

57.3 Detailed functions and state diagrams

As depicted in Figure 57–3, the OAM sublayer comprises the following functions:

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 244 of 717

a) ***Multiplexer***. This function is responsible for passing frames received from the superior sublayer (e.g., MAC client sublayer), OAMPDUs from the Control function and loopback frames from the Parser, to the subordinate sublayer (e.g., MAC sublayer).
b) ***Parser***. This function distinguishes among OAMPDUs, MAC client frames and loopback frames and passes each to the appropriate entity (Control, superior sublayer and Multiplexer, respectively).
c) ***Control***. This function is responsible for providing the interface between the OAM client entity and the functions internal to the OAM sublayer. It incorporates the Discovery process which detects the existence and capabilities of OAM at the remote DTE. Also, it includes the Transmit process, which governs the transmission of OAMPDUs to the Multiplexer function and a set of Receive rules, which govern the reception of OAMPDUs.

57.3.1 State diagram variables

57.3.1.1 Constants

OAM_subtype
The value of the Subtype field for OAMPDUs (see Table 43B–3).

Slow_Protocols_Multicast
The value of the Slow Protocols Multicast Address. (see Table 43B–1.)

Slow_Protocols_Type
The value of the Slow Protocols Length/Type field. (see Table 43B–2.)

57.3.1.2 Variables

BEGIN
A variable that resets the functions within OAM.
Values: TRUE; when the OAM sublayer is reset, or when local_oam_enable is set to DISABLE.
FALSE; When (re-)initialization has completed and local_oam_enable is set to ENABLE.

ind_DA
ind_SA
ind_mac_service_data_unit
ind_reception_status
The parameters of the MA_DATA.indication service primitive, as defined in Clause 2.

ind_subtype
The value of the octet following the Length/Type field in a Slow Protocol frame (see Annex 43B).
Value: Integer

local_critical_event
A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This indicates the DTE has experienced an unspecified critical event condition.
Values: FALSE; A critical event condition has not occurred.
TRUE; A critical event condition has occurred.

local_dying_gasp
A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This indicates the DTE has experienced an unrecoverable failure condition.
Values: FALSE; An unrecoverable local failure condition has not occurred.
TRUE; An unrecoverable local failure condition has occurred.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 245 of 717

local_link_status

A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This indicates the status of the established link (see 67.6.3).

Values: FAIL; A link fault condition does exist.
OK; A link fault condition does not exist.

local_lost_link_timer_done

A parameter of the OAM_CTL.indication service primitive, as defined in 57.2.5.4. This is used to indicate the local_lost_link_timer has expired.

Values: TRUE; local_lost_link_timer has expired.
FALSE; local_lost_link_timer has not expired.

local_mux_action

A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This governs the flow of frames from the MAC client through the Multiplexer function (see 57.3.3).

Values: FWD; Multiplexer passes MAC client frames to subordinate sublayer.
DISCARD; Multiplexer discards MAC client frames.

local_oam_enable

Used to enable and disable the OAM sublayer entity. If Clause 30 is present, this maps to 30.3.6.1.2 aOAMAdminState.

Values: DISABLE; The interface acts as it would if it had no OAM sublayer.
ENABLE; The interface employs the OAM sublayer and its functions.

local_oam_mode

Used to configure the OAM sublayer entity in either Active or Passive mode. If Clause 30 is present, this maps to 30.3.6.1.3 aOAMMode.

Values: PASSIVE; The OAM sublayer entity is configured in Passive mode.
ACTIVE; The OAM sublayer entity is configured in Active mode.

local_par_action

A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This governs the flow of non-OAMPDUs through the Parser function (see 57.3.4).

Values: FWD; Parser passes received non-OAMPDUs to superior sublayer.
LB; Parser passes received non-OAMPDUs to Multiplexer during remote loopback test.
DISCARD; Parser discards received non-OAMPDUs.

local_pdu

This is used to govern the transmission and reception of OAMPDUs as part of the Discovery process (see 57.3.2.1).

Values: LF_INFO; Only Information OAMPDUs with the Link Fault critical link event set and without Information TLVs are allowed to be transmitted; only Information OAMPDUs are allowed to be received.
RX_INFO; No OAMPDUs are allowed to be transmitted; only Information OAMPDUs are allowed to be received.
INFO; Only Information OAMPDUs are allowed to be transmitted and received.
ANY; Any permissible OAMPDU is allowed to be transmitted and received (see Table 57–1).

local_satisfied

A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This indicates the OAM client finds the local and remote OAM configuration settings are agreeable.

Values: FALSE; OAM client either has not seen or is not satisfied with local and remote settings.
TRUE; OAM client is satisfied with local and remote settings.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 246 of 717

local_stable
: A variable set by the Discovery state diagram (see Figure 57–5). This is used to indicate local OAM client acknowledgment of and satisfaction with remote OAM state information.
Values: FALSE; Indicates that local DTE either has not seen or is unsatisfied with remote state information.
TRUE; Indicates that local DTE has seen and is satisfied with remote state information.

local_unidirectional
: A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This indicates the DTE is capable of sending OAMPDUs when the link in the receive direction is not operational.
Values: FALSE; DTE is unable to send OAMPDUs when receive path is not operational.
TRUE; DTE is capable of sending OAMPDUs when receive path is not operational.

pdu_req
: This represents a request to send an OAMPDU and is used within the Transmit state diagram (see Figure 57–6).
Values: NONE: No OAMPDU.request
CRITICAL: OAMPDU.request with one or more critical link event OAM_CTL.request parameters set (local_dying_gasp, local_link_status, local_critical_event).
NORMAL: OAMPDU.request with no critical link event(s) set

remote_stable
: A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. OAM client extracts remote state information from received OAMPDUs. This is used to indicate remote OAM client acknowledgment of and satisfaction with local OAM state information.
Values: FALSE; Indicates that remote DTE either has not seen or is unsatisfied with local state information.
TRUE; Indicates that remote DTE has seen and is satisfied with local state information.

remote_state_valid
: A parameter of the OAM_CTL.request service primitive, as defined in 57.2.5.3. This is used to indicate OAM client has received remote state information found within Local Information TLVs of received Information OAMPDUs.
Values: FALSE; Indicates that OAM client has not seen remote state information.
TRUE; Indicates that OAM client has seen remote state information.

req_DA
req_SA
req_mac_service_data_unit
req_frame_check_sequence
: The parameters of the MA_DATA.request service primitive, as defined in Clause 2.

57.3.1.3 Messages

CTL:OAMI.indication
: The service primitive used to pass a received frame to an internal OAM function with the specified parameters.

CTL:OAMI.request
LBF:OAMI.request
: The service primitives used to transmit a frame with the specified parameters.

MAC:MA_DATA.indication

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 247 of 717

MCF:MA_DATA.indication
The service primitives used to pass a received frame to a client with the specified parameters.

MAC:MA_DATA.request
MCF:MA_DATA.request
The service primitives used to transmit a frame with the specified parameters.

MADI
Alias for
MA_DATA.indication(ind_DA, ind_SA, ind_mac_service_data_unit, ind_reception_status)

MADR
Alias for
MA_DATA.request(req_DA, req_SA, req_mac_service_data_unit, req_frame_check_sequence)

OAMII
Alias for
OAMI.indication(DA, SA, oam_service_data_unit, frame_check_sequence, reception_status)

OAMIR
Alias for
OAMI.request(DA, SA, oam_service_data_unit, frame_check_sequence)

RxOAMPDU
Alias for ind_DA = Slow_Protocols_Multicast * ind_Length/Type = Slow_Protocols_Type * ind_subtype = OAM_subtype

rxOK
Alias for ind_reception_status = receiveOK

valid_pdu_req
Alias for the following term:
(local_pdu≠RX_INFO * pdu_req=NORMAL * pdu_cnt≠0)
+ (local_pdu=ANY * pdu_req=CRITICAL)

57.3.1.4 Counters

pdu_cnt
This counter is used to limit the number of OAMPDUs transmitted per second and ensure at least one OAMPDU is sent each second within the Transmit state diagram (see Figure 57–6).

57.3.1.5 Timers

All timers operate in a manner consistent with 14.2.3.2.

local_lost_link_timer
Timer used to reset the Discovery state diagram (see Figure 57–5).
Duration: 5 s ± 10%.

pdu_timer
Timer used to ensure OAM sublayer adheres to maximum number of OAMPDUs per second and emits at least one OAMPDU per second.
Duration: 1 s ± 10%.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 248 of 717

57.3.2 Control

The Control function provides the interfaces with the OAM client necessary to transmit and receive OAMPDUs and convey control and status parameters. The Control function also contains the Discovery process, which enables OAM to be established on a link, and the Transmit process, which governs the transmission of OAMPDUs to the Multiplexer block. Rules governing the reception of OAMPDUs are also contained within the Control function.

57.3.2.1 OAM Discovery

OAM provides a mechanism to detect the presence of an OAM sublayer at the remote DTE. This mechanism is called Discovery. OAM sublayer entities shall implement the OAM Discovery state diagram shown in Figure 57–5.

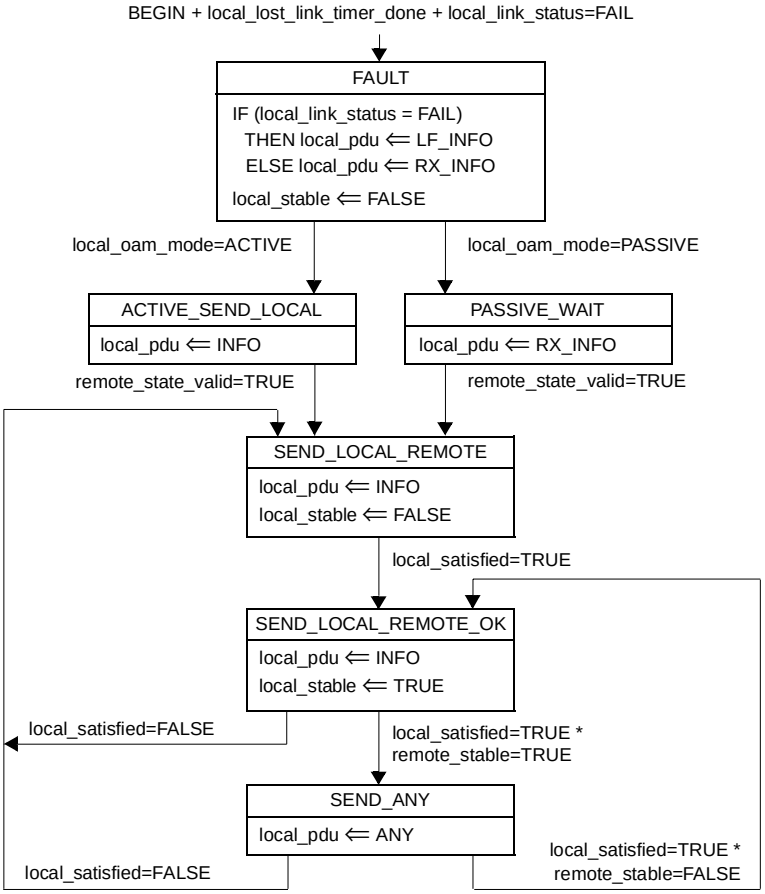


Figure 57–5—OAM Discovery state diagram

In each state, the OAM sublayer sends specified OAMPDUs in a periodic fashion, normally once a second. When local_pdu is set to LF_INFO, the OAM sublayer sends Information OAMPDUs with the Link Fault bit of the Flags field set and without any Information TLVs. When local_pdu is set to RX_INFO, the OAM sublayer does not send any OAMPDUs. When local_pdu is set to INFO, only Information OAMPDUs are sent. When local_pdu is set to ANY, all permissible OAMPDUs may be sent, subject to the restrictions found in Table 57–1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 249 of 717

57.3.2.1.1 FAULT state

Upon entering the FAULT state, local_pdu is set based on the value of local_link_status. If it is set to FAIL, local_pdu is set to LF_INFO, otherwise is it set to RX_INFO. Then, local_stable is set to FALSE. While local_link_status is set to FAIL, the DTE will remain in this state indicating to the remote DTE there is link fault. This is accomplished by sending Information OAMPDUs once per second with the Link Fault bit of the Flags field set and no Information TLVs in the Data field. The unidirectional transmission of Information OAMPDUs is supported by some physical coding sublayers (see 57.2.12).

If OAM is reset, disabled, the local_lost_link_timer expires or the local_link_status equals FAIL, the Discovery process returns to the FAULT state.

57.3.2.1.2 ACTIVE_SEND_LOCAL state

Once local_link_status is set to OK, the DTE evaluates local_oam_mode. A DTE configured in Active mode (see 57.2.9.1) sends Information OAMPDUs that only contain the Local Information TLV (see 57.5.2.1). This state is called ACTIVE_SEND_LOCAL. While in this state, the local DTE waits for Information OAMPDUs received from the remote DTE.

57.3.2.1.3 PASSIVE_WAIT state

A DTE configured in Passive mode (see 57.2.9.2) waits until receiving Information OAMPDUs with Local Information TLVs before sending any Information OAMPDUs with Local Information TLVs. This state is called PASSIVE_WAIT. By waiting until first receiving an Information OAMPDU with the Local Information TLV, a Passive DTE cannot complete the OAM Discovery process when connected to another Passive DTE.

57.3.2.1.4 SEND_LOCAL_REMOTE state

Once the local DTE has received an Information OAMPDU with the Local Information TLV from the remote DTE, the local DTE begins sending Information OAMPDUs that contain both the Local and Remote Information TLVs. This state is called SEND_LOCAL_REMOTE. If at any time the settings on either the local or remote DTE change resulting in the local OAM client becoming unsatisfied with the settings, the Discovery process returns to the SEND_LOCAL_REMOTE state.

57.3.2.1.5 SEND_LOCAL_REMOTE_OK state

If the local OAM client deems the settings on both the local and remote DTEs are acceptable, it enters the SEND_LOCAL_REMOTE_OK state. If at any time the settings on the local OAM client change resulting in the remote OAM client becoming unsatisfied with the settings, the OAM Discovery process returns to the SEND_LOCAL_REMOTE_OK state.

57.3.2.1.6 SEND_ANY state

Finally, once an OAMPDU has been received indicating the remote device is satisfied with the respective settings, the local device enters the SEND_ANY state. This is the expected normal operating state for OAM on fully operational links.

57.3.2.1.7 Sending Discovery status to peer

The Local Stable and Local Evaluating bits of the Flags field communicate the status of the local Discovery process to the peer. When the OAM Discovery process is started, the local DTE sets the Local Stable to 0 and Local Evaluating bits to 1 indicating OAM Discovery has not completed.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 250 of 717

If, after learning of the remote OAM settings, the local OAM client determines it is unsatisfied it sets the Local Stable and Local Evaluating bits to 0 indicating Discovery cannot successfully complete. If the local OAM client is satisfied, the local DTE sets the Local Stable bit to 1 and Local Evaluating bit to 0 indicating the local OAM client is satisfied.

When Local Stable is set to 1 and Local Evaluating is set to 0 and Remote Stable is set to 1 and Remote Evaluating is set to 0 indicating that both OAM clients are satisfied, the OAM Discovery process has successfully completed and local_pdu is set to ANY. See Table 57–3 for more information.

57.3.2.2 Transmit

OAM sublayer entities shall implement the Transmit state diagram shown in Figure 57–6.

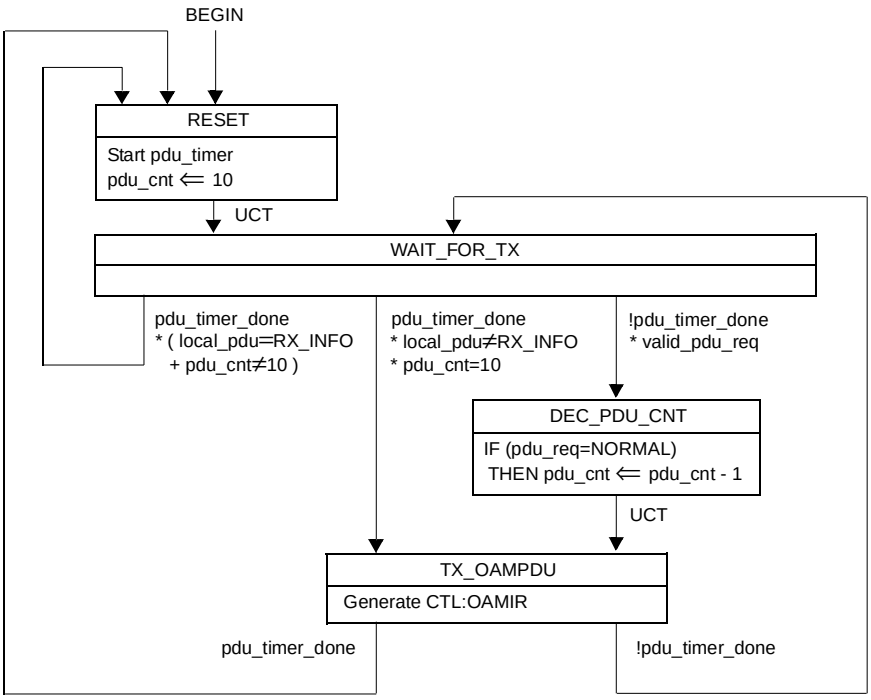


Figure 57–6—Transmit state diagram

57.3.2.2.1 RESET state

Upon initialization, the RESET state is entered. A one second timer is started called pdu_timer. The pdu_cnt variable is reset with a value of ten, the maximum number of OAMPDUs that may be sent in one second. Following RESET, the WAIT_FOR_TX state is entered.

57.3.2.2.2 WAIT_FOR_TX state

While in the WAIT_FOR_TX state, the Transmit process waits for the occurrence of one of three conditions. These three conditions are summarized below:

a) Expiration of pdu_timer:
   1) With one or more OAMPDUs sent within the last second
   2) Without any OAMPDUs being sent within the last second and without a valid pending request to send an OAMPDU
b) Valid request to send an OAMPDU present

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 251 of 717

57.3.2.2.3 Expiration of pdu_timer

While in the WAIT_FOR_TX state, if the pdu_timer expires and one or more OAMPDUs have been sent within the last second, the Transmit process transitions to the RESET state. If, however, the pdu_timer expires and no OAMPDUs have been sent within the last second and there is no valid request to send an OAMPDU present, the Transmit process transitions to the TX_OAMPDU state sending an Information OAMPDU. This prevents the Discovery process from restarting. If local_pdu is set to LF_INFO, the Transmit process ensures the Information OAMPDU has the Link Fault bit of the Flags field set and has no Information TLVs in the Data field.

If, however, the OAM sublayer entity is configured to not send any OAMPDUs, as indicated by the local_pdu variable set to RX_INFO, the Transmit function will simply restart the pdu_timer by returning to the RESET state.

57.3.2.2.4 Valid request to send an OAMPDU

While in the WAIT_FOR_TX state, if a valid request to send an OAMPDU is present, the Transmit process transmits the requested OAMPDU in the TX_OAMPDU state. If the Flags field of the OAMPDU to be sent does not contain any critical link events, the pdu_cnt variable is decremented in the DEC_PDU_CNT state. A valid request is either one of the following:

a) An OAMPDU.request service primitive from the OAM client with the local_pdu variable set to INFO or ANY and pdu_cnt not equal to zero.
b) An OAM_CTL.request service primitive from the OAM client with one or more critical event parameters set and the local_pdu variable set to ANY. When the local_pdu variable is set to ANY, the Discovery process has completed and is in the SEND_ANY state. The Discovery process needs to complete before critical events, other than Link Fault, may be sent to the peer OAM entity.

57.3.2.2.5 TX_OAMPDU state

The TX_OAMDPU state generates the CTL:OAMI.request service primitive, which requests the transmission of an OAMPDU to the Multiplexer process. After generating the request, the Transmit process returns to the RESET state if the pdu_timer is expired or the WAIT_FOR_TX state if the pdu_timer has not expired.

57.3.2.2.6 Transmit rules

The following rules govern the generation of the CTL:OAMIR service primitive:

a) While local_pdu is set to LF_INFO, only Information OAMPDUs with the Link Fault bit of the Flags field set and without any Information TLVs shall be generated.
b) While local_pdu is set to RX_INFO, CTL:OAMIR service primitives shall not be generated.
c) While local_pdu is set to INFO, only Information OAMPDUs shall be generated.
d) While local_pdu is set to ANY:
    1) An OAM_CTL.request service primitive with one or more of the critical link event parameters set shall generate a CTL:OAMIR service primitive, requesting the transmission of an Information OAMPDU with the appropriate bit(s) of the Flags field set.
    2) An OAMPDU.request service primitive shall generate a CTL:OAMIR service primitive, requesting the transmission of the particular OAMPDU.

57.3.2.3 Receive rules

CTL:OAMII service primitives indicate a received OAMPDU and in turn generate an OAMPDU.indication service primitive to the OAM client entity subject to the following rules:

a) When local_pdu is not set to ANY, Information OAMPDUs shall be passed to the OAM client and non-Information OAMPDUs are discarded.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 252 of 717

b) When local_pdu is set to ANY, all OAMPDUs, including those with unknown Code fields shall be passed to the OAM client.[4] It is anticipated that the OAM client will ignore unknown or unsupported OAMPDUs.

57.3.3 Multiplexer

OAM sublayer entities shall implement the Multiplexer state diagram shown in Figure 57–7.

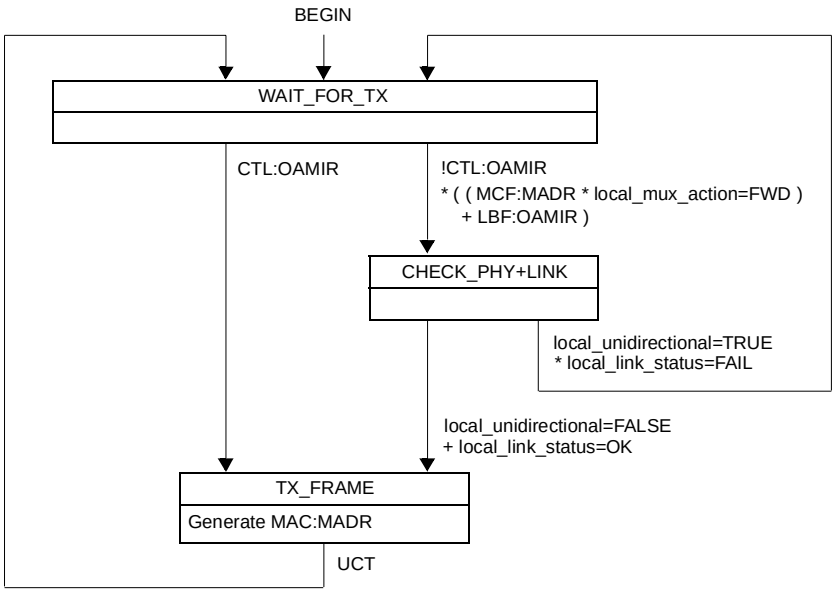


Figure 57–7—Multiplexer state diagram

57.3.3.1 WAIT_FOR_TX state

Upon initialization, the WAIT_FOR_TX state is entered. While in the WAIT_FOR_TX state, the Multiplexer waits for the occurrence of one of two conditions. These two conditions are summarized below:

a) Valid request to send an OAMPDU present
b) Valid request to forward a MAC client frame or loop back frame from Parser

57.3.3.1.1 Valid request to send an OAMPDU

While in the WAIT_FOR_TX state, if a request to send an OAMPDU is present, the Multiplexer function transmits the requested OAMPDU in the TX_FRAME state.

57.3.3.1.2 Valid request to forward or loop back frame

While in the WAIT_FOR_TX state, if a valid request to forward or loop back a frame is present and no request to send an OAMPDU is present, the Multiplexer will then check the status of the underlying physical layer and unidirectional configuration (in the CHECK_PHY+LINK state) and either transmit the frame in the TX_FRAME state or simply return to the WAIT_FOR_TX state.

[4]The behaviour of the OAM sublayer is different in this regard from the behaviour of the MAC Control sublayer (see Clauses 31 and 64).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 253 of 717

A valid request to forward a frame from the superior sublayer is indicated by the variable MCF:MADR with the Multiplexer configured to forward frames as indicated by the local_mux_action variable set to FWD. A request to loop back a frame from the Parser function is indicated by the variable LBF:OAMIR. When either request occurs, the local_unidirectional variable needs to be FALSE or the local_link_status variable needs to be OK in order for the frame to be sent to the subordinate sublayer via the TX_FRAME state. Since only Information OAMPDUs with the Link Fault critical link event indication set and no Information TLVs are sent on a unidirectional link, the status of the link is evaluated to ensure the same behaviour as devices that do not support the optional Unidirectional OAM capability. When the local_link_status variable is OK, the MAC client frame will be transmitted regardless of the Unidirectional OAM capability or setting (see 57.2.12).

57.3.3.2 TX_FRAME state

Once the Multiplexer process reaches the TX_FRAME state, it shall provide transparent pass-through of frames submitted by the superior sublayer, the Transmit process and the Parser process. The transmission of an OAMPDU shall not affect the transmission of a frame that has been submitted to the subordinate sublayer (i.e., the MAC's TransmitFrame function is synchronous, and is never interrupted). After the frame has been sent to the subordinate sublayer, the Multiplexer process returns to the WAIT_FOR_TX state.

57.3.4 Parser

OAM sublayer entities shall implement the Parser state diagram shown in Figure 57–8.

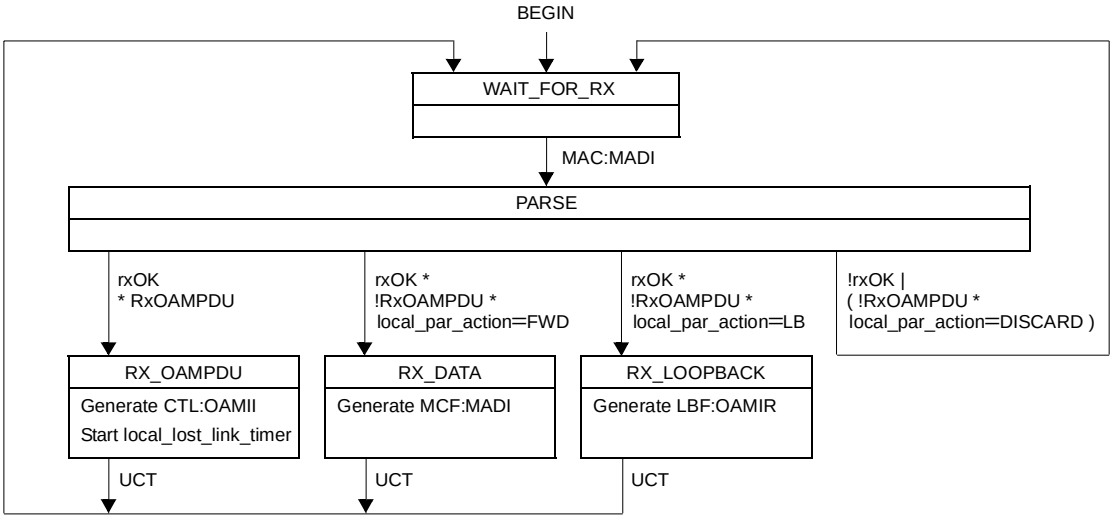


Figure 57–8—Parser state diagram

The Parser decodes frames received from the subordinate sublayer, passes OAMPDUs to the Control function, MAC client frames to the superior sublayer and loop back frames to the Multiplexer function. After reset, the Parser function enters the WAIT_FOR_RX state. The reception of a frame is detected when the MAC:MADI service primitive occurs. When a frame is received, the Parser function enters the PARSE state.

57.3.4.1 Reception of OAMPDU

The RX_OAMPDU state is entered when the receive frame is identified as an OAMPDU. Received OAMPDUs are sent to the OAM Control function via the CTL:OAMII service primitive. Following the

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 254 of 717

receive rules in 57.3.2.3, the OAM Control function then passes the received OAMPDU to the OAM client. In addition, the local_lost_link_timer is reset. The Parser function then returns to the WAIT_FOR_RX state.

57.3.4.2 Reception of non-OAMPDUs

Received non-OAMPDUs are handled according to the setting of the local_par_action parameter. Refer to 57.2.11 for a complete description of OAM remote loopback operation and the local_par_action variable.

57.3.4.2.1 Reception of non-OAMPDU in FWD mode

The RX_DATA state is entered if the frame is determined to not be an OAMPDU and the local_par_action variable is set to FWD. The received frame is passed up to the superior sublayer via the MCF:MADI service primitive. The Parser then returns to the WAIT_FOR_RX state.

57.3.4.2.2 Reception of non-OAMPDU in LB mode

The RX_LOOPBACK state is entered if the frame is determined to not be an OAMPDU and the local_par_action parameter is set to LB. The received loopback frame is passed to the Multiplexer function via the LBF:OAMIR service primitive to be looped back to the remote DTE. After the frame is passed to the Multiplexer function, the Parser function returns to the WAIT_FOR_RX state.

57.3.4.2.3 Reception of non-OAMPDU in DISCARD mode

If the local_par_action parameter is set to DISCARD, the Parser function simply returns to the WAIT_FOR_RX state.

57.4 OAMPDUs

57.4.1 Ordering and representation of octets

All OAMPDUs comprise an integral number of octets. When the encoding of (an element of) an OAMPDU is depicted in a diagram:

a) Octets are transmitted from top to bottom.
b) Within an octet, bits are shown with bit 0 to the left and bit 7 to the right.
c) When consecutive octets are used to represent a binary number, the octet transmitted first has the more significant value.
d) When consecutive octets are used to represent a MAC address, the least significant bit of the first octet is assigned the value of the first bit of the MAC address, the next most significant bit the value of the second bit of the MAC address, and so on for all the octets of the MAC address.

When the encoding of an element of an OAMPDU is depicted in a table, the least significant bit is bit 0.

The bit/octet ordering of any Organizationally Unique Identifier (OUI) field within an OAMPDU is identical to the bit/octet ordering of the OUI portion of the DA/SA. Additional detail defining the format of OUIs can be found in IEEE Std 802-2001 Clause 9.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 255 of 717

57.4.2 Structure

OAMPDUs are basic frames; they shall not be tagged (see Clause 3). The OAMPDU structure shall be as shown in Figure 57–9.

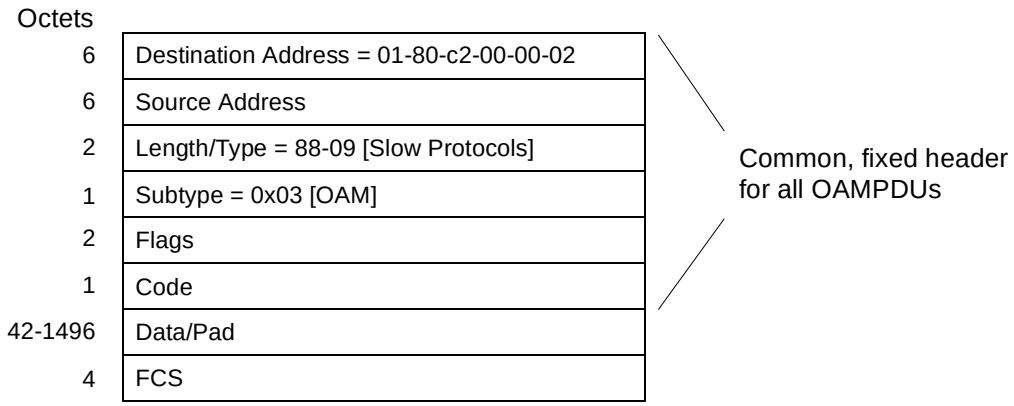


Figure 57–9—OAMPDU frame structure

OAMPDUs shall have the following fields:

a) ***Destination Address*** (DA). The DA in OAMPDUs is the Slow_Protocols_Multicast address. Its use and encoding are specified in Annex 43B.
b) ***Source Address*** (SA). The SA in OAMPDUs carries the individual MAC address associated with the port through which the OAMPDU is transmitted.
c) ***Length/Type***. OAMPDUs are always Type encoded, and carry the Slow_Protocols_Type field value. The use and encoding of this type is specified in Annex 43B.
d) ***Subtype***. The Subtype field identifies the specific Slow Protocol being encapsulated. OAMPDUs carry the Subtype value 0x03.
e) ***Flags***. The Flags field contains status bits as defined in 57.4.2.1.
f) ***Code***. The Code field identifies the specific OAMPDU. The use and encoding of this field is specified in Table 57–4.
g) ***Data/Pad***. This field contains the OAMPDU data and any necessary pad. Implementations shall support OAMPDUs at least minFrameSize in length.
h) ***FCS***. This field is the Frame Check Sequence, as defined in Clause 4.

57.4.2.1 Flags field

The Flags field is encoded as individual bits within two octets as shown in Table 57–3. Additional diagnostic information may be sent using the Event Notification OAMPDU.

Table 57–3—Flags field

Bit(s)	Name	Description
15:7	*Reserved*	Reserved bits shall be set to zero when sending an OAMPDU, and should be ignored on reception for compatibility with future use of reserved bits.
6	Remote Stable	When remote_state_valid is set to TRUE, the Remote Stable and Remote Evaluating values shall be a copy of the last received Local Stable and Local Evaluating values from the remote OAM peer. Otherwise, the Remote Stable and Remote Evaluating bits shall be set to 0.
5	Remote Evaluating	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 256 of 717

Table 57–3—Flags field *(continued)*

Bit(s)	Name	Description
4	Local Stable	Local Stable and Local Evaluating form a two-bit encoding shown below: 4:3 0x0 = Local DTE Unsatisfied, Discovery can not complete 0x1 = Local DTE Discovery process has not completed 0x2 = Local DTE Discovery process has completed 0x3 = Reserved. This value shall not be sent. If the value 0x3 is received, it should be ignored and not change the last received value.
3	Local Evaluating	
2	Critical Event	1 = A critical event has occurred. 0 = A critical event has not occurred.
1	Dying Gasp	1 = An unrecoverable local failure condition has occurred. 0 = An unrecoverable local failure condition has not occurred.
0	Link Fault	The PHY has detected a fault has occurred in the receive direction of the local DTE (e.g., link, Physical layer). 1 = Local device's receive path has detected a fault. 0 = Local device's receive path has not detected a fault.

NOTE—The definition of the specific faults comprising the Critical Event, Dying Gasp, and Link Fault flags is implementation specific and beyond the scope of this standard.

57.4.2.2 Code field

The value of the Code field is set by the Transmit process in the Control function for Information OAMPDUs it generates. The OAM client sets the Code field for all OAMPDUs it generates. Table 57–4 contains the defined OAMPDU codes.

Table 57–4—OAMPDU codes

Code	OAMPDU	Comment	Source
00	Information	Communicates local and remote OAM information.	OAM client / OAM sublayer
01	Event Notification	Alerts remote DTE of link event(s).	OAM client
02	Variable Request	Requests one or more specific MIB variables.	OAM client
03	Variable Response	Returns one or more specific MIB variables.	OAM client
04	Loopback Control	Enables/disables OAM remote loopback.	OAM client
05-FD	*Reserved*	*Reserved*	OAM client
FE	Organization Specific	Reserved for Organization Specific Extensions, distinguished by Organizationally Unique Identifier	OAM client
FF	*Reserved*	*Reserved*	OAM client

57.4.3 OAMPDU descriptions

The local OAM sublayer communicates with the remote OAM sublayer via OAMPDUs. OAMPDUs are identified with a specific code. OAMPDUs are formatted as compliant IEEE 802.3 frames, where the IEEE 802.3 frame header format is described in Clause 3. OAMPDUs are further defined, as shown in Figure 57–9, to include a Subtype field, a Flags field, and a Code field following the IEEE 802.3 defined Length/Type field. The Data field begins in a fixed location within the OAMPDU. The Data field contents are unique to the particular OAMPDU. The following sections provide a detailed description of each OAMPDU and its corresponding Data field. All received OAMPDUs, including those with reserved Code fields, are passed to the OAM client. OAMPDUs with reserved Code field values shall not be transmitted.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 257 of 717

57.4.3.1 Information OAMPDU

The Information OAMPDU, identified by the Code field 0x00, is used to send OAM state information to the remote DTE. The Information OAMPDU frame structure shall be as depicted in Figure 57–10.

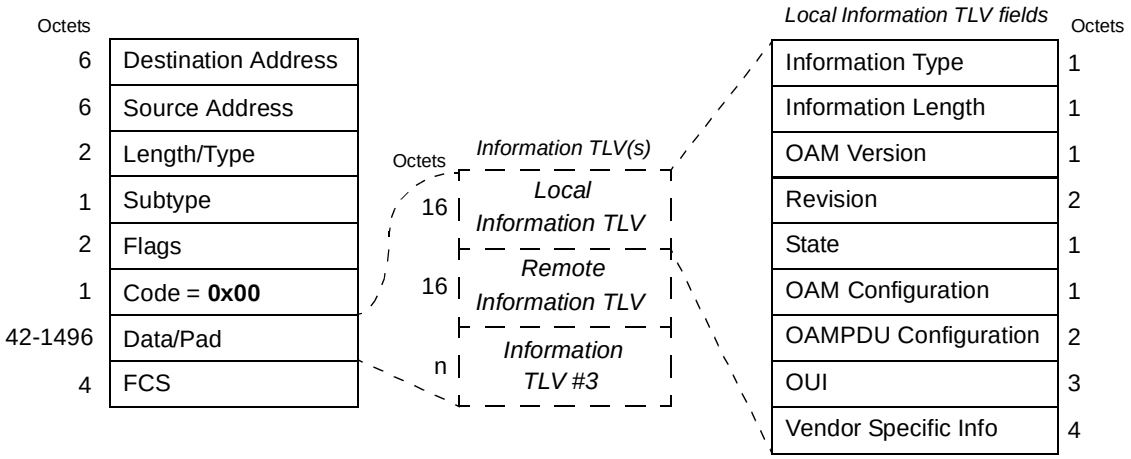


Figure 57–10—Information OAMPDU frame structure

When local_pdu is set to LF_INFO, the Information OAMPDU Data field shall not have any Information TLVs. When local_pdu is not set to LF_INFO, the Information OAMPDU Data field shall consist of the Local Information TLV (see 57.5.2.1) immediately following the Code field. In addition, if the Discovery state diagram variable remote_state_valid is TRUE, the Data field shall also contain the Remote Information TLV (see 57.5.2.2), immediately following the Local Information TLV and may also contain other Information TLVs found in Table 57–6.

57.4.3.2 Event Notification OAMPDU

The optional Event Notification OAMPDU, identified with the Code field set to 0x01, is used to alert the remote DTE of link events introduced in 57.2.10.2. The Event Notification OAMPDU frame structure shall be as depicted in Figure 57–11.

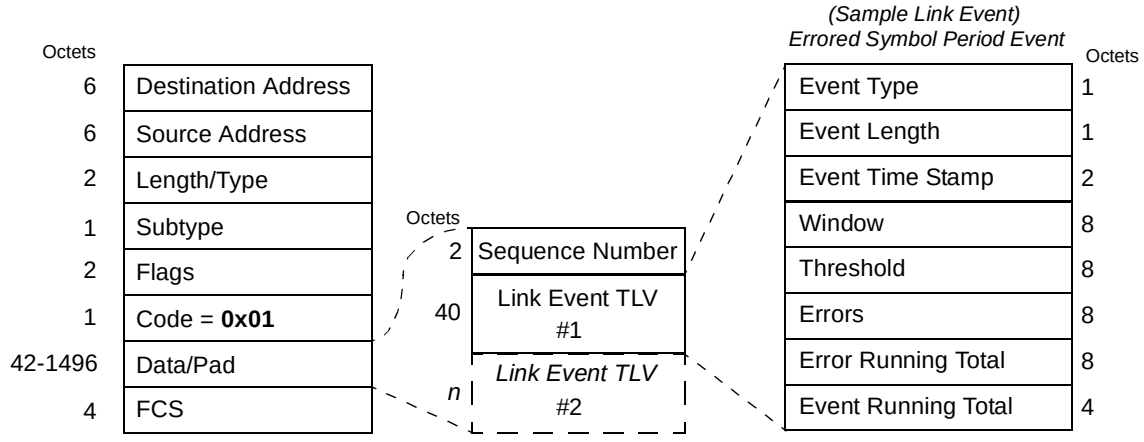


Figure 57–11—Event Notification OAMPDU frame structure

The first two octets of the Data field shall contain a Sequence Number, encoded as a 16-bit unsigned integer. As described in 57.2.3, the OAM client may send duplicate Event Notification OAMPDUs to increase the likelihood the remote DTE receives a particular event. The OAM client increments the Sequence Number

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 258 of 717

for each unique Event Notification OAMPDU formed by the OAM client. A particular Event Notification OAMPDU may be sent multiple times with the same sequence number. It is recommended that any duplicate Event Notification OAMPDUs follow its original without a different, intervening Event Notification OAMPDU. A duplicate Event Notification OAMPDU should not be transmitted if a new Event Notification OAMPDU has already followed the original OAMPDU. Any particular event can be signaled in only one unique Event Notification OAMPDU (though that OAMPDU may be transmitted multiple times). Upon receiving an Event Notification OAMPDU, the OAM client compares the Sequence Number with the last received Sequence Number. If equal, the current event is a duplicate and is ignored by the OAM client.

Following the Sequence Number field, the Data field shall contain one or more optional Link Event TLVs which may provide useful information for troubleshooting events and faults. Link Event TLVs are defined in 57.5.3.

57.4.3.3 Variable Request OAMPDU

The optional Variable Request OAMPDU, identified with a Code field of 0x02, is used to request one or more MIB variables from the remote DTE. The Variable Request OAMPDU frame structure shall be as depicted in Figure 57–12.

The Variable Request OAMPDU Data field shall contain one or more Variable Descriptors. Variable Descriptors are defined in 57.6.1.

.

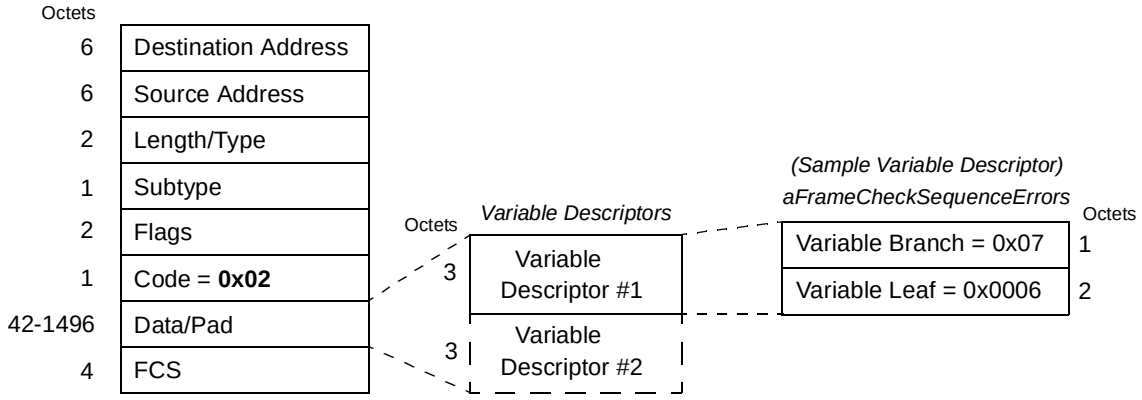


Figure 57–12—Variable Request OAMPDU frame structure

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 259 of 717

57.4.3.4 Variable Response OAMPDU

The optional Variable Response OAMPDU, identified with the Code field of 0x03, is used to return one or more MIB variables. The Variable Response OAMPDU frame structure shall be as depicted in Figure 57–13.

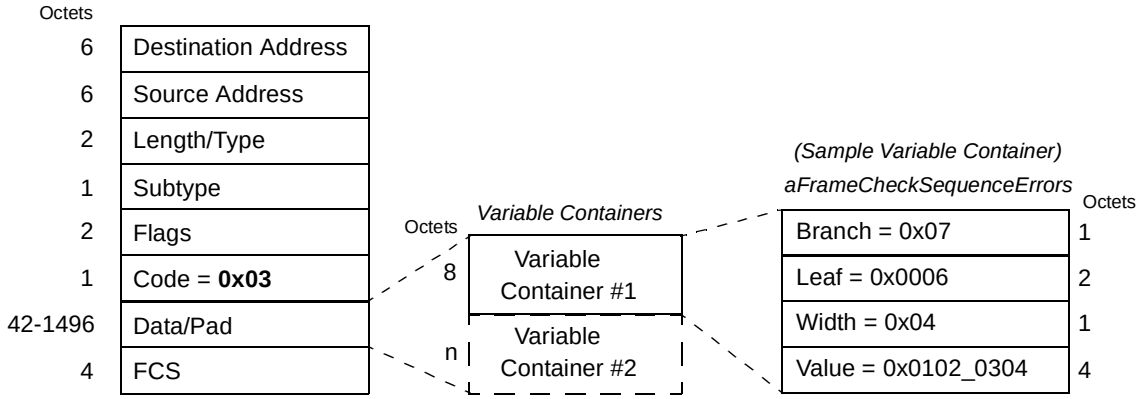


Figure 57–13—Variable Response OAMPDU frame structure

The Variable Response OAMPDU Data field shall contain one or more Variable Containers. Variable Containers are defined in 57.6.2. A Variable Response OAMPDU needs to be sent by the OAM client within one second of receipt of a Variable Request OAMPDU. If a DTE is unable to retrieve one or more variables, it needs to respond within one second and indicate the appropriate error(s) as found in Table 57–17. If a DTE is unable to retrieve one or more attributes within a package or object, it needs to either a) return the appropriate Variable Indication for the particular attribute(s) and return all other requested variables or b) return a Variable Indication for the entire package or object.

57.4.3.5 Loopback Control OAMPDU

The optional Loopback Control OAMPDU, identified with the Code field set to 0x04, is used to control the remote DTE's OAM remote loopback state. The Loopback Control OAMPDU frame structure shall be as depicted in Figure 57–14.

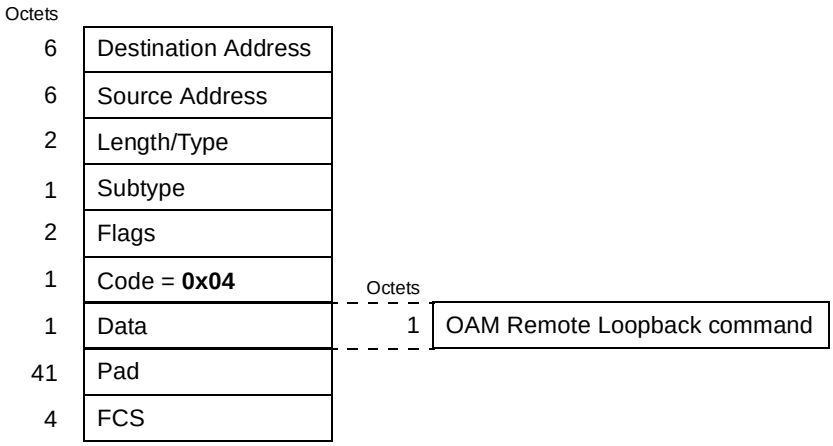


Figure 57–14—Loopback Control OAMPDU frame structure

The Loopback Control OAMPDU Data field shall consist of an OAM remote loopback command. Table 57–5 lists the defined OAM remote loopback commands.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 260 of 717

Table 57–5—OAM remote loopback commands

Command	Description
0x00	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
0x01	Enable OAM Remote Loopback
0x02	Disable OAM Remote Loopback
0x03-0xFF	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*

For a complete description of OAM remote loopback refer to 57.2.11.

57.4.3.6 Organization Specific OAMPDU

The optional Organization Specific OAMPDU, identified with the Code field set to 0xFE, is used for organization specific extensions. The Organization Specific OAMPDU frame structure shall be as depicted in Figure 57–15.

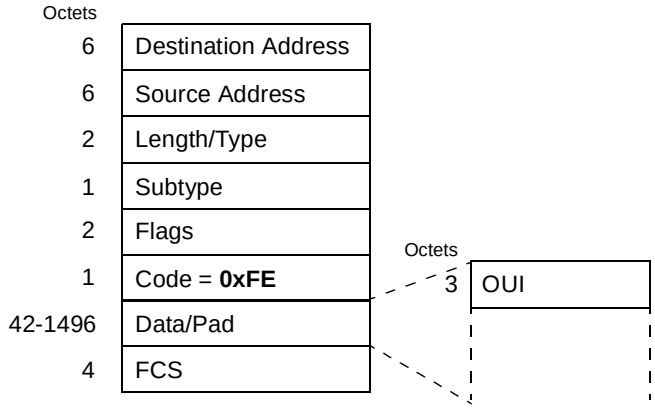


Figure 57–15—Organization Specific OAMPDU frame structure

The first three octets of the Organization Specific OAMPDU Data field shall contain the Organizationally Unique Identifier (OUI).[5] The format and function of the rest of the Organization Specific OAMPDU Data field is dependent on OUI value and is beyond the scope of this standard.

57.5 OAM TLVs

57.5.1 Parsing

The OAM client parses OAM TLVs. All OAM TLVs contain a single octet Type field and a single octet Length field. The Length field encompasses the entire TLV including the Type and Length fields. TLV processing should follow these recommendations:

a) Detection of a TLV type 0x00 should indicate there are no more TLVs to process (the length and value of the Type 0x00 TLV can be ignored).
b) TLVs with lengths 0x00 or 0x01 should be considered invalid, and the OAMPDU should be considered to have no more TLVs.
c) TLVs with unknown or unexpected types should be ignored.
d) If the length of a TLV is not equal to that defined for the Type, it should be ignored, and the remainder of the frame may be ignored.
e) If a TLV length indicates that the TLV extends beyond the frame (e.g., the length cannot fit into the frame given its length and starting point), then the TLV should be ignored.

[5]Interested applicants should contact the IEEE Standards Department, Institute of Electrical and Electronics Engineers, http://standards.ieee.org/regauth/index.html, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331, USA.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 261 of 717

57.5.2 Information TLVs

This subclause contains the definitions for Information TLVs. Information TLVs are found in Information OAMPDUs. Table 57–6 contains the defined Information TLVs.

Table 57–6—Information TLV types

Type	Description
0x00	*End of TLV marker*
0x01	Local Information
0x02	Remote Information
0x03-0xFD	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
0xFE	Organization Specific Information
0xFF	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*

The following sub-clauses describe the defined Information TLVs.

57.5.2.1 Local Information TLV

The Local Information TLV shall have the following fields:

a) ***Information Type*** = *Local Information*. This one-octet field indicates the nature of the data carried in this TLV-tuple. The encoding of this field is found in Table 57–6.
b) ***Information Length***. The one-octet field indicates the length (in octets) of this TLV-tuple. Local Information TLV uses a length value of 16 (0x10).
c) ***OAM Version***. This one-octet field indicates the version supported by the DTE. This field shall contain the value 0x01 to claim compliance with Version 1 of this protocol.
d) ***Revision.*** This two-octet field indicates the current revision of the Information TLV. The value of this field shall start at zero and be incremented each time something in the Information TLV changes. Upon reception of an Information TLV from a peer, an OAM client may use this field to decide if it needs to be processed (an Information TLV that is identical to the previous Information TLV doesn't need to be parsed as nothing in it has changed).
e) ***State***. This one-octet field contains OAM state information and shall be as shown in Table 57–7.
f) ***OAM Configuration***. This one-octet field contains OAM configuration variables and shall be as shown in Table 57–8.
g) ***OAMPDU Configuration***. This two-octet field contains OAMPDU configuration variables and shall be as shown in Table 57–9 and encoded as specified in 57.4.1 (c).
h) ***OUI***. This three-octet field contains the 24-bit Organizationally Unique Identifier and shall be as shown in Table 57–10.
i) ***Vendor Specific Information***. This four-octet field contains the Vendor Specific Information field and shall be as shown in Table 57–11.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 262 of 717

Table 57–7—State field

Bit(s)	Name	Description
7:3	*Reserved*	In Local Information TLVs, reserved bits shall be set to zero when sending an OAMPDU, and should be ignored on reception for compatibility with future use of reserved bits.
2	Multiplexer Action	0 = Device is forwarding non-OAMPDUs to the lower sublayer (local_mux_action = FWD). 1 = Device is discarding non-OAMPDUs (local_mux_action = DISCARD).
1:0	Parser Action	00 = Device is forwarding non-OAMPDUs to higher sublayer (local_par_action = FWD). 01 = Device is looping back non-OAMPDUs to the lower sublayer (local_par_action = LB). 10 = Device is discarding non-OAMPDUs (local_par_action = DISCARD). 11 = Reserved. In Local Information TLVs, this value shall not be sent. If the value 11 is received, it should be ignored and not change the last received value.

Table 57–8—OAM Configuration field

Bit(s)	Name	Description
7:5	*Reserved*	In Local Information TLVs, reserved bits shall be set to zero when sending an OAMPDU, and should be ignored on reception for compatibility with future use of reserved bits.
4	Variable Retrieval	1 = DTE supports sending Variable Response OAMPDUs. 0 = DTE does not support sending Variable Response OAMPDUs.
3	Link Events	1 = DTE supports interpreting Link Events. 0 = DTE does not support interpreting Link Events.
2	OAM Remote Loopback Support	1 = DTE is capable of OAM remote loopback mode. 0 = DTE is not capable of OAM remote loopback mode.
1	Unidirectional Support	1 = DTE is capable of sending OAMPDUs when the receive path is non-operational. 0 = DTE is not capable of sending OAMPDUs when the receive path is non-operational.
0	OAM Mode	1 = DTE configured in Active mode. 0 = DTE configured in Passive mode.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 263 of 717

Table 57–9—OAMPDU Configuration field

Bit(s)	Name	Description
15:11	*Reserved*	In Local Information TLVs, reserved bits shall be set to zero when sending an OAMPDU, and should be ignored on reception for compatibility with future use of reserved bits.
10:0	Maximum OAMPDU Size	11-bit field which represents the largest OAMPDU, in octets, supported by the DTE. This value is compared to the remote's Maximum PDU Size and the smaller of the two is used. Prior to exchanging and agreeing upon a Maximum OAMPDU Size, a DTE sends minFrameSize OAMPDUs. The minimum value is minFrameSize / 8. The maximum value is equal to maxUntaggedFrameSize, which is defined in 4.4.2. The OAMPDUs transmitted by a DTE are limited by both the local DTE's Maximum OAMPDU size and the remote DTE's Maximum OAMPDU size as indicated in received Information OAMPDUs. A DTE is not required to change the value transmitted in this field after negotiation to an agreed size as each end will dynamically determine the correct maximum OAMPDU size to use.

Table 57–10—OUI field

Bit(s)	Name	Description
23:0	OUI [a]	24-bit Organizationally Unique Identifier of the vendor.

[a]Organizations that have previously received OUIs from the IEEE Registration Authority should use one of their allocated OUIs consistently as the company identifier.

Table 57–11—Vendor Specific Information field

Bit(s)	Name	Description
31:0	Vendor Specific Information	32-bit identifier that may be used to differentiate a vendor's product models/versions.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 264 of 717

57.5.2.2 Remote Information TLV

The Remote Information TLV shall be a copy of the last received Local Information TLV from the remote OAM peer, with the exception of the Information Type field. The encoding of this field is found in Table 57–6.

57.5.2.3 Organization Specific Information TLV

The Organization Specific Information TLV shall have the following fields:

a) ***Information Type*** = *Organization Specific Information*. This one-octet field indicates the nature of the data carried in this TLV-tuple. The encoding of this field is found in Table 57–6.
b) ***Information Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. The length of an Organization Specific Information TLV is unspecified.
c) ***Organizationally Unique Identifier.*** This three-octet field shall contain the 24-bit Organizationally Unique Identifier (OUI).
d) ***Organization Specific Value***. This field indicates the value of the Organization Specific Information TLV. This field's length and contents are unspecified.

57.5.3 Link Event TLVs

This subclause contains the definitions for Link Event TLVs. Link Event TLVs are found in Event Notification OAMPDUs. Table 57–12 contains the defined Link Event TLVs.

Table 57–12—Link Event TLV type value

Type	Description
0x00	*End of TLV marker*
0x01	Errored Symbol Period Event
0x02	Errored Frame Event
0x03	Errored Frame Period Event
0x04	Errored Frame Seconds Summary Event
0x05-0xFD	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
0xFE	Organization Specific Event
0xFF	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*

The following subclauses describe the defined Link Event TLVs.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 265 of 717

57.5.3.1 Errored Symbol Period Event TLV

The Errored Symbol Period Event TLV counts the number of symbol errors that occurred during the specified period. The period is specified by the number of symbols that can be received in a time interval on the underlying physical layer. This event is generated if the symbol error count is equal to or greater than the specified threshold for that period.

The Errored Symbol Period Event TLV shall have the following fields:

a) ***Event Type*** = *Errored Symbol Period Event*. This one-octet field indicates the nature of the information carried in this TLV tuple. The encoding of this field is found in Table 57–12.

b) ***Event Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. Errored Symbol Period Event uses a length value of 40 (0x28).

c) ***Event Time Stamp.*** This two-octet field indicates the time reference when the event was generated, in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.

d) ***Errored Symbol Window***. This eight-octet field indicates the number of symbols in the period, encoded as a 64-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.
   1) The default value is the number of symbols in one second for the underlying physical layer.
   2) The lower bound is the number of symbols in one second for the underlying physical layer.
   3) The upper bound is the number of symbols in one minute for the underlying physical layer.

e) ***Errored Symbol Threshold***. This eight-octet field indicates the number of errored symbols in the period is required to be equal to or greater than in order for the event to be generated, encoded as a 64-bit unsigned integer. When generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.
   1) The default value is one symbol error.
   2) The lower bound is zero symbol errors.
   3) The upper bound is unspecified.

f) ***Errored Symbols***. This eight-octet field indicates the number of symbol errors in the period, encoded as a 64-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.

g) ***Error Running Total***. This eight-octet field indicates the sum of symbol errors since the OAM sublayer was reset. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.

h) ***Event Running Total***. This four-octet field indicates the number of Errored Symbol Period Event TLVs that have been generated since the OAM sublayer was reset, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.35. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.42.

This event is generated at the end of the event window rather than when the threshold is crossed.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 266 of 717

57.5.3.2 Errored Frame Event TLV

The Errored Frame Event TLV counts the number of errored frames detected during the specified period. The period is specified by a time interval. This event is generated if the errored frame count is equal to or greater than the specified threshold for that period. Errored frames are frames that had transmission errors as detected at the Media Access Control sublayer as communicated via the reception_status parameter of the MA_DATA.indication service primitive. Refer to 4.2.9 for the definition of detectable transmission errors during reception.

The Errored Frame Event TLV shall have the following fields:

a) ***Event Type*** = *Errored Frame Event*. This one-octet field indicates the nature of the information carried in this TLV tuple. The encoding of this field is found in Table 57–12.
b) ***Event Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. Errored Frame Event uses a length value of 26 (0x1A).
c) ***Event Time Stamp.*** This two-octet field indicates the time reference when the event was generated, in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.
d) ***Errored Frame Window***. This two-octet field indicates the duration of the period in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.
    1) The default value is one second.
    2) The lower bound is one second.
    3) The upper bound is one minute.
e) ***Errored Frame Threshold***. This four-octet field indicates the number of detected errored frames in the period is required to be equal to or greater than in order for the event to be generated, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.
    1) The default value is one frame error.
    2) The lower bound is zero frame errors.
    3) The upper bound is unspecified.
f) ***Errored Frames***. This four-octet field indicates the number of detected errored frames in the period, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.
g) ***Error Running Total***. This eight-octet field indicates the sum of errored frames that have been detected since the OAM sublayer was reset. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.
h) ***Event Running Total***. This four-octet field indicates the number of Errored Frame Event TLVs that have been generated since the OAM sublayer was reset, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.37. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.43.

This event is generated at the end of the event window rather than when the threshold is crossed.

57.5.3.3 Errored Frame Period Event TLV

The Errored Frame Period Event TLV counts the number of errored frames detected during the specified period. The period is specified by a number of received frames. This event is generated if the errored frame count is greater than or equal to the specified threshold for that period (for example, if the errored frame count is greater than or equal to 10 for the last 1,000,000 frames received). Errored frames are frames that had transmission errors as detected at the Media Access Control sublayer as communicated via the reception_status parameter of the MA_DATA.indication service primitive. Refer to 4.2.9 for the definition of detectable transmission errors during reception.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 267 of 717

The Errored Frame Period Event TLV shall have the following fields:

a) ***Event Type*** = *Errored Frame Period Event*. This one-octet field indicates the nature of the information carried in this TLV tuple. The encoding of this field is found in Table 57–12.
b) ***Event Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. Errored Frame Period Event uses a length value of 28 (0 x 1C).
c) ***Event Time Stamp.*** This two-octet field indicates the time reference when the event was generated, in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.39. When received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.
d) ***Errored Frame Window***. This four-octet field indicates the duration of period in terms of frames, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.39. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.
    1) The default value is the number of minFrameSize frames that can be received in one second on the underlying physical layer.
    2) The lower bound is the number of minFrameSize frames that can be received in 100 ms on the underlying physical layer.
    3) The upper bound is the number of minFrameSize frames that can be received in one minute on the underlying physical layer.
e) ***Errored Frame Threshold***. This four-octet field indicates the number of errored frames in the period is required to be equal to or greater than in order for the event to be generated, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.39. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.
    1) The default value is one frame error.
    2) The lower bound is zero frame errors.
    3) The upper bound is unspecified.
f) ***Errored Frames***. This four-octet field indicates the number of frame errors in the period, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.39. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.
g) ***Error Running Total***. This eight-octet field indicates the sum of frame errors that have been detected since the OAM sublayer was reset. When this event is generated by the local DTE and if Clause 30 is present, this maps to 330.3.6.1.39. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.
h) ***Event Running Total***. This four-octet field indicates the number of Errored Frame Period Event TLVs that have been generated since the OAM sublayer was reset, encoded as a 32-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.39. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.44.

This event is generated at the end of the event window rather than when the threshold is crossed.

57.5.3.4 Errored Frame Seconds Summary Event TLV

The Errored Frame Seconds Summary Event TLV counts the number of errored frame seconds that occurred during the specified period. The period is specified by a time interval. This event is generated if the number of errored frame seconds is equal to or greater than the specified threshold for that period. An errored frame second is a one second interval wherein at least one frame error was detected. Errored frames are frames that had transmission errors as detected at the Media Access Control sublayer and communicated via the reception_status parameter of the MA_DATA.indication service primitive. Refer to 4.2.9 for the definition of detectable transmission errors during reception.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 268 of 717

The Errored Frame Seconds Summary Event TLV shall have the following fields:

a) ***Event Type*** = *Errored Frame Seconds Summary Event*. This one-octet field indicates the nature of the information carried in this TLV tuple. The encoding of this field is found in Table 57–12.
b) ***Event Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. Errored Frame Seconds Summary Event uses a length value of 18 (0x12).
c) ***Event Time Stamp.*** This two-octet field indicates the time reference when the event was generated, in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.
d) ***Errored Frame Seconds Summary Window***. This two-octet field indicates the duration of the period in terms of 100 ms intervals, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.
    1) The default value is 60 seconds.
    2) The lower bound is 10 seconds.
    3) The upper bound is 900 seconds.
e) ***Errored Frame Seconds Summary Threshold***. This two-octet field indicates the number of errored frame seconds in the period is required to be equal to or greater than in order for the event to be generated, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.
    1) The default value is one errored second.
    2) The lower bound is zero errored seconds.
    3) The upper bound is unspecified.
f) ***Errored Frame Seconds Summary***. This two-octet field indicates the number of errored frame seconds in the period, encoded as a 16-bit unsigned integer. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.
g) ***Error Running Total***. This four-octet field indicates the sum of errored frame seconds that have been detected since the OAM sublayer was reset. When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.
h) ***Event Running Total***. This four-octet field indicates the number of Errored Frame Seconds Summary Event TLVs that have been generated since the OAM sublayer was reset, encoded as a 32-bit unsigned integer.When this event is generated by the local DTE and if Clause 30 is present, this maps to 30.3.6.1.41. When this event is received from the remote DTE and if Clause 30 is present, this maps to 30.3.6.1.45.

This event is generated at the end of the event window rather than when the threshold is crossed.

57.5.3.5 Organization Specific Event TLVs

The optional Organization Specific Event TLV may be used by organizations to define extensions to the Event mechanisms in this clause. Organization Specific Event TLVs shall have the following fields:

a) ***Event Type*** = *Organization Specific Event*. This one-octet field indicates the nature of the information carried in this TLV tuple. The encoding of this field is found in Table 57–12.
b) ***Event Length***. This one-octet field indicates the length (in octets) of this TLV_tuple. The length of the Organization Specific Event is unspecified.
c) ***Organizationally Unique Identifier.*** This three-octet field shall contain a 24-bit Organizationally Unique Identifier.
d) ***Organization Specific Value***. This field indicates the value of the Organization Specific Event. This field's length and contents are unspecified.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 269 of 717

57.6 Variables

MIB variables are queried through the use of Variable Request OAMPDUs and returned through the use of Variable Response OAMPDUs. Variable Request OAMPDUs, defined in 57.4.3.3, use data structures called Variable Descriptors (see 57.6.1). An OAM client may request one or more variables in each Variable Request OAMPDU.

Variable Response OAMPDUs, defined in 57.4.3.4, use data structures called Variable Containers (see 57.6.2). Each returned Variable Container resides within a single Variable Response OAMPDU. If a Variable Container does not fit within a Variable Response OAMPDU, an error code is returned. In returning requested variables, an OAM client generates at least one and perhaps additional Variable Response OAMPDUs per received Variable Request OAMPDU. The following sections describe the format of Variable Descriptors and Variable Containers.

See 57.6.3 for a description of the parsing rules for Variable Descriptors and Variable Containers.

57.6.1 Variable Descriptors

A Variable Descriptor is used to request MIB attributes, objects and packages and uses the CMIP protocol encodings as found in Annex 30A. The Variable Descriptor structure shall be as shown in Table 57–13.

Table 57–13—Variable Descriptor format

Octet(s)	Name	Description
1	Variable Branch	Derived from the CMIP protocol encodings in Annex 30A, Variable Branches may reference attributes, objects or packages. If an object or package is referenced, only the attributes within the object or package shall be found within the Variable Container. Actions shall not be found within Variable Containers.
2	Variable Leaf	The Variable Leaf field is derived from the CMIP protocol encodings in Annex 30A.

57.6.2 Variable Containers

Variable Containers are used to return MIB attributes, objects and packages. One or more Variable Containers may exist in the Data field of a Variable Response OAMPDU (see 57.4.3.4).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 270 of 717

57.6.2.1 Format of Variable Containers when returning attributes

The Variable Container structure for an attribute shall be as shown in Table 57–14.

Table 57–14—Variable Container format when returning an attibute

Octet(s)	Name	Description
1	Variable Branch	Derived from the CMIP protocol encodings in Annex 30A, Variable Branches may reference attributes, objects or packages. If an object or package is referenced, only the attributes within the object or package shall be found within the Variable Container. Actions shall not be found within Variable Containers.
2	Variable Leaf	The Variable Leaf field is derived from the CMIP protocol encodings in Annex 30A.
1	Variable Width	When bit 7 = 1, bits 6:0 represent a Variable Indication. Refer to Table 57–17 for the encoding of bits 6:0. There is no Variable Value field when bit 7 = 1. When bit 7 = 0, bits 6:0 represent the length of the Variable Value field in octets. An encoding of 0x00 equals 128 octets. All other encodings represent actual lengths.
varies	Variable Value	The Variable Value field may be 1 to 128 octets in length. Its width is determined by the Variable Width field.

The first field is the one-octet Variable Branch field. The second field is the two-octet Variable Leaf field. See Table 57–16 for examples of Variable Branch and Variable Leaves. The third field is the dual purpose one-octet Variable Width field. This field either contains the actual width of the attribute or a Variable Indication providing information as to the reason this particular attribute could not be returned. See Table 57–17 for the defined Variable Indications. If the Variable Width field contains a width value, the fourth field is the Variable Value field, which contains the attribute. This field may be up to 128 octets in length. Octets of the attribute are ordered most significant first, followed by each successive octet. If the Variable Width field contains a Variable Indication, the Variable Value field does not exist.

57.6.2.2 Format of Variable Containers when returning packages and objects

The Variable Container structure for packages and objects shall be as shown in Table 57–15.

Table 57–15—Variable Container format when returning packages and objects

Octet(s)	Name	Description
1	Variable Branch	Derived from the CMIP protocol encodings in Annex 30A, Variable Branches may reference attributes, objects or packages. If an object or package is referenced, only the attributes within the object or package shall be found within the Variable Container. Actions shall not be found within Variable Containers.
2	Variable Leaf	The Variable Leaf field is derived from the CMIP protocol encodings in Annex 30A.
1	Variable Width	When bit 7 = 1, bits 6:0 represent a Variable Indication. Refer to Table 57–17 for the encoding of bits 6:0. There is no Variable Value field when bit 7 = 1. When bit 7 = 0, bits 6:0 represent the length of the Variable Value field in octets. An encoding of 0×00 equals 128 octets. All other encodings represent actual lengths.
varies	Variable Value	The Variable Value field may be 1 to 128 octets in length. Its width is determined by the Variable Width field.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 271 of 717

A package is defined as a set of MIB attributes and/or actions. An object is a set of packages, which in turn are made up of MIB attributes and/or actions. Variable Containers provide an efficient method for returning packages and objects. Attributes within packages and objects are returned in the order those attributes are listed in Annex 30A.

The Variable Container structure for packages and objects is similar to the structure for attributes. The first field is the one-octet Variable Branch field for the specific package or object being returned. The second field is the two-octet Variable Leaf field for the specific package or object being returned. See Table 57–16 for examples of Variable Branch and Variable Leaves. The third field is the dual purpose one-octet Variable Width field of the first attribute within the package or object being returned. This field either contains the actual width of the attribute or a Variable Indication providing information as to the reason this particular attribute could not be returned. See Table 57–17 for the defined Variable Indications. If the Variable Width field contains a width value, the fourth field is the Variable Value field, which contains the first attribute of the package or object being returned. This field may be up to 128 octets in length. Octets of the attribute are ordered most significant first, followed by each successive octet. If the Variable Width field contains a Variable Indication, the Variable Value field does not exist.

For each successive attribute within the package, the third field (Variable Width) and fourth field (Variable Value), if applicable, are repeated.

For each successive attribute within each successive package of the object, the third field (Variable Width) and fourth field (Variable Value), if applicable, are repeated.

57.6.3 Parsing

The OAM client parses Variable Descriptors and Variable Containers. All Variable Descriptors/Containers contain a one-octet Variable Branch field and a two-octet Variable Leaf field. Variable Descriptor/Container processing should follow these recommendations:

a) Detection of a Variable Branch field equal to 0x00 should indicate there are no more Variable Descriptors/Containers to process (subsequent fields can be ignored).
b) Variable Branch or Variable Leaf fields with unknown or unexpected values should be ignored.
c) If a Variable Width field indicates Variable Container extends beyond the frame (e.g., the length cannot fit into the frame given its length and starting point), then the Variable Container should be ignored.
d) Detection of a Variable Indication value equal to 0x40 should indicate there are no more attributes within the object to process.
e) Detection of a Variable Indication value equal to 0x60 should indicate there are no more objects within the package to process.

57.6.4 Variable Branch/Leaf examples

Table 57–16 contains a set of example branch and leaf values for attributes, packages and objects.

Table 57–16—Variable Branch/Leaf Examples

Variable Type	Variable Name	Variable	
		Branch	Leaf
attribute	aFramesTransmittedOK	0x07	0x0002
attribute	aFramesReceivedOK	0x07	0x0005
package	pMandatory	0x04	0x0001
package	pRecommended	0x04	0x0002

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 272 of 717

Table 57–16—Variable Branch/Leaf Examples

Variable Type	Variable Name	Variable	
		Branch	Leaf
object	oMACEntity	0x03	0x0001
object	oPHYEntity	0x03	0x0002

57.6.5 Variable Indications

If a DTE is unable to retrieve one or more variables, the Variable Container is used to return the appropriate Variable Indication for the particular variable(s). The Variable Indications are defined in Table 57–17.

Table 57–17—Variable Indications

Coding	Indication
0x00	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
0x01	Length of requested Variable Container(s) exceeded OAMPDU data field.
0x02-1F	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
Attribute Indications	
0x20	Requested attribute was unable to be returned due to an undetermined error.
0x21	Requested attribute was unable to be returned because it is not supported by the local DTE.
0x22	Requested attribute may have been corrupted due to reset.
0x23	Requested attribute unable to be returned due to a hardware failure.
0x24	Requested attribute experienced an overflow error.
0x25-3F	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
Object Indications	
0x40	End of object indication.
0x41	Requested object was unable to be returned due to an undetermined error.
0x42	Requested object was unable to be returned because it is not supported by the local DTE.
0x43	Requested object may have been corrupted due to reset.
0x44	Requested object unable to be returned due to a hardware failure.
0x45-5F	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*
Package Indications	
0x60	End of package indication.
0x61	Requested package was unable to be returned due to an undetermined error.
0x62	Requested package was unable to be returned because it is not supported by the local DTE.
0x63	Requested package may have been corrupted due to reset.
0x64	Requested package unable to be returned due to a hardware failure.
0x65-7F	*Reserved - shall not be transmitted, should be ignored on reception by OAM client*

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 273 of 717

57.7 Protocol Implementation Conformance Statement (PICS) proforma for Clause 57, Operations, Administration, and Maintenance (OAM)[6]

57.7.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 57, Operations, Administration, and Maintenance (OAM), shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

57.7.2 Identification

57.7.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Name(s)	
NOTES 1—Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. 2—The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

57.7.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Clause 57, Operations, Administration, and Maintenance (OAM)
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	

Date of Statement	

57.7.2.3 Major capabilities/options

57.7.3 PICS proforma Tables for Operation, Administration, and Maintenance (OAM)

[6]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 274 of 717

Item	Feature	Subclause	Value/Comment	Status	Support
OM	OAM object class	30.3.6		O	Yes [ ] No [ ]
CSI	OAM client service interfaces	57.2.5		M	Yes [ ]
ISI	Internal service interfaces	57.2.8		M	Yes [ ]
*ACTV	Active mode	57.2.9		O.1	Yes [ ] No [ ]
*PASS	Passive mode	57.2.9		O.1	Yes [ ] No [ ]
*LB	OAM remote loopback	57.2.11, Table 57–8		O	Yes [ ] No [ ]
UNI	Unidirectional operation	57.2.12, Table 57–8	Requires support for unidirectional operation as defined in Clause 66.	O	Yes [ ] No [ ]
*EVNT	Link Events	57.4.3.2, 57.5.3		O	Yes [ ] No [ ]
*VAR	Variable Retrieval	57.4.3.3, 57.4.3.4		O	Yes [ ] No [ ]
*OSP	Organization Specific OAMPDU	57.4.3.6		O	Yes [ ] No [ ]
*OSE	Organization Specific Events	57.5.3.5		O	Yes [ ] No [ ]
OSI	Organization Specific Information TLV	57.5.2.3		O	Yes [ ] No [ ]

57.7.3.1 Functional Specifications

Item	Feature	Subclause	Value/Comment	Status	Support
OFS1	Passive mode limited transmission	57.2.9.2	Cannot send Variable Request or Loopback Control OAMPDUs	PASS:M	Yes [ ] No [ ] N/A [ ]
OFS2	Discovery state diagram	57.3.2.1	Implemented as defined in Figure 57–5	M	Yes [ ]
OFS3	Transmit state diagram	57.3.2.2	Implemented as defined in Figure 57–6	M	Yes [ ]
OFS4	OAMPDU transmission when local_pdu is set to LF_INFO	57.3.2.2.6	Only Information OAMPDUs with Link Fault bit of Flags field and without Information TLVs can be transmitted	M	Yes [ ]
OFS5	OAMPDU transmission when local_pdu is set to RX_INFO	57.3.2.2.6	No OAMPDU transmission allowed	M	Yes [ ]
OFS6	OAMPDU transmission when local_pdu is set to INFO	57.3.2.2.6	Only Information OAMPDUs can be transmitted	M	Yes [ ]
	OAMPDU transmission when local_pdu is set to ANY:				
OFS7	OAM_CTL.request service primitive with one or more critical link event parameters	57.3.2.2.6	Requests transmission of Information OAMPDU with appropriate bits of Flags field set	M	Yes [ ]
OFS8	OAMPDU.request service primitive	57.3.2.2.6	Requests transmission of OAMPDU	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 275 of 717

Item	Feature	Subclause	Value/Comment	Status	Support
	OAMPDU Flags field reserved encodings				
OFS9	Remote Stable and Remote Evaluating bits	Table 57–3	Encoding of 0x3 is not transmitted	M	Yes [ ]
OFS10	Local Stable and Local Evaluating bits	Table 57–3	Encoding of 0x3 is not transmitted	M	Yes [ ]
OFS11	Reserved bits	Table 57–3	Reserved bits are zero on transmission	M	Yes [ ]
OFS12	OAMPDU Code field	57.4.2.2	Only defined Code field values are permitted in transmitted OAMPDUs	M	Yes [ ]
OFS13	OAMPDU reception when local_pdu is not set to ANY	57.3.2.3	Only Information OAMPDUs are sent to OAM client entity	M	Yes [ ]
OFS14	OAMPDU reception when local_pdu is set to ANY	57.3.2.3	All OAMPDUs are sent to OAM client entity	M	Yes [ ]
OFS15	Multiplexer state diagram	57.3.3	Implemented as defined in Figure 57–7	M	Yes [ ]
OFS16	Multiplexer transparent pass-through	57.3.3.2	Provide transparent pass-through of frames from superior sublayer to subordinate sublayer	M	Yes [ ]
OFS17	Effect of OAMPDU on a frame already submitted to subordinate sublayer	57.3.3.2	Has no effect	M	Yes [ ]
OFS18	Parser state diagram	57.3.4	Implemented as defined in Figure 57–8	M	Yes [ ]

57.7.3.2 Event Notification Generation and Reception

Item	Feature	Subclause	Value/Comment	Status	Support
EV1	Response to Critical Events	57.2.10.3	Set/clear Flag bits based on OAM_CTL.request service primitive	M	Yes [ ]
EV2	Critical Event reception	57.2.10.4	Indicated via Flags field of OAMPDU.indication service primitive	M	Yes [ ]
EV3	Link Event reception	57.2.10.4	Indicated via OAMPDU.indication service primitive with all received Event Notification OAMPDUs	EVNT: M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 276 of 717

57.7.3.3 OAMPDUs

Item	Feature	Subclause	Value/Comment	Status	Support
PDU1	Tagging	57.4.2	OAMPDUs cannot be tagged	M	Yes [ ]
PDU2	OAMPDU structure	57.4.2	As defined in Figure 57–9 and field definitions	M	Yes [ ]
PDU3	Minimum OAMPDU size	57.4.2	Support OAMPDUs minFrame-Size in length	M	Yes [ ]
PDU4	Information OAMPDU frame structure	57.4.3.1	Shown in Figure 57–10	M	Yes [ ]
PDU5	Information OAMPDU when local_pdu set to LF_INFO	57.4.3.1	Data field contains zero Information TLVs	M	Yes [ ]
	Information OAMPDU when local _pdu not set to LF_INFO				
PDU6	remote_state_valid=FALSE	57.4.3.1	Data field contains Local Information TLV	M	Yes [ ]
PDU7	remote_state_valid=TRUE	57.4.3.1	Data field contains Local and Remote Information TLVs	M	Yes [ ]
PDU8	Type values 0x03-0xFD	Table 57–6	Not to be sent	M	Yes [ ]
PDU9	Type value 0xFF	Table 57–6	Not to be sent	M	Yes [ ]
PDU10	Event Notification OAMPDU frame structure	57.4.3.2	Shown in Figure 57–11	EVNT: M	Yes [ ] N/A [ ]
PDU11	Event Notification OAMPDU Sequence Number	57.4.3.2	The first two bytes of the Data field contain a Sequence Number encoded as an unsigned 16-bit integer	EVNT: M	Yes [ ] N/A [ ]
PDU12	Event Notification OAMPDU Event(s)	57.4.3.2	Data field containing one or more Link Event TLVs following the Sequence Number	EVNT: M	Yes [ ] N/A [ ]
PDU13	Variable Request OAMPDU frame structure	57.4.3.3	Shown in Figure 57–12	VAR * ACTV: M	Yes [ ] No [ ] N/A [ ]
PDU14	Variable Request OAMPDU Data field	57.4.3.3	Data field contains one or more Variable Descriptors	VAR * ACTV: M	Yes [ ] N/A [ ]
PDU15	Variable Response OAMPDU frame structure	57.4.3.4	Shown in Figure 57–13	VAR:M	Yes [ ] N/A [ ]
PDU16	Variable Response OAMPDU Data field	57.4.3.4	Data field contains one or more Variable Containers	VAR:M	Yes [ ] N/A [ ]
PDU17	Loopback Control OAMPDU frame structure	57.4.3.5	Shown in Figure 57–14	!PASS * LB:M	Yes [ ] N/A [ ]
PDU18	Loopback Control OAMPDU Data field	57.4.3.5	Data field contains a single OAM Remote Loopback command from Table 57–5.	!PASS * LB:M	Yes [ ] N/A [ ]
PDU19	Command value 0x00	Table 57–5	Not to be sent	!PASS * LB:M	Yes [ ] N/A [ ]
PDU20	Command values 0x03-0xFF	Table 57–5	Not to be sent	!PASS * LB:M	Yes [ ] N/A [ ]
PDU21	Organization Specific OAMPDU frame structure	57.4.3.6	Shown in Figure 57–15	OSP:M	Yes [ ] N/A [ ]
PDU22	Organization Specific OAMPDU Organizationally Unique Identifier field	57.4.3.6	Contains 24-bit Organizationally Unique Identifier	OSP:M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 277 of 717

57.7.3.4 Local Information TLVs

Item	Feature	Subclause	Value/Comment	Status	Support
LIT1	Local Information TLV	57.5.2.1	Contains the following fields: Information Type, Information Length, OAM Version, Revision, State, OAM Configuration, OAMPDU Configuration, OUI, Vendor Specific Information	M	Yes [ ]
LIT2	Local Information TLV OAM Version field	57.5.2.1	Contains 0x01 to claim compliance to this specification	M	Yes [ ]
LIT3	Local Information TLV Revision Field	57.5.2.1	Starts at zero and incremented each time a Local Information TLV field changes.	M	Yes [ ]
LIT4	Local Information TLV State field	57.5.2.1	As defined in Table 57–7	M	Yes [ ]
LIT5	Local Information TLV State field Parser Action 0x3 value	57.5.2.1	Is not transmitted	M	Yes [ ]
LIT6	Reserved bits	Table 57–7	Reserved bits are zero on transmission	M	Yes [ ]
LIT7	Local Information TLV OAM Configuration field	57.5.2.1	As defined in Table 57–8	M	Yes [ ]
LIT8	Reserved bits	Table 57–8	Reserved bits are zero on transmission	M	Yes [ ]
LIT9	Local Information TLV OAMPDU Configuration field	57.5.2.1	As defined in Table 57–9	M	Yes [ ]
LIT10	Local Information TLV OUI field	57.5.2.1	As defined in Table 57–10	M	Yes [ ]
LIT11	Reserved bits	Table 57–9	Reserved bits are zero on transmission	M	Yes [ ]
LIT12	Local Information TLV Vendor Specific Information field	57.5.2.1	As defined in Table 57–11	M	Yes [ ]

57.7.3.5 Remote Information TLVs

Item	Feature	Subclause	Value/Comment	Status	Support
RIT1	Remote Information TLV	57.5.2.2	Contains the Information Type field specifying the Remote Information TLV Type value and all remaining fields are copied from the last received Local Information TLV from remote OAM peer	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 278 of 717

57.7.3.6 Organization Specific Information TLVs

Item	Feature	Subclause	Value/Comment	Status	Support
OIT1	Organization Specific Information TLV	57.5.2.3	Contains the following fields: Information Type, Information Length, OUI, Organization Specific Value	M	Yes [ ]
OIT2	Organization Specific Information TLV OUI field	57.5.2.3	Contains 24-bit OUI	M	Yes [ ]

57.7.4 Link Event TLVs

Item	Feature	Subclause	Value/Comment	Status	Support
ET1	Errored Symbol Period Event TLV structure	57.5.3.1	Contains the following fields: Event Type, Event Length, Event Time Stamp, Errored Symbol Window, Errored Symbol Threshold, Errored Symbols, Error Running Total, Event Running Total	EVNT: M	Yes [ ] N/A [ ]
ET2	Errored Frame Event TLV structure	57.5.3.2	Contains the following fields: Event Type, Event Length, Event Time Stamp, Errored Frame Window, Errored Frame Threshold, Errored Frames, Error Running Total, Event Running Total	EVNT: M	Yes [ ] N/A [ ]
ET3	Errored Frame Period Event TLV structure	57.5.3.3	Contains the following fields: Event Type, Event Length, Event Time Stamp, Errored Frame Window, Errored Frame Threshold, Errored Frames, Error Running Total, Event Running Total	EVNT: M	Yes [ ] N/A [ ]
ET4	Errored Frame Seconds Summary Event TLV structure	57.5.3.4	Contains the following fields: Event Type, Event Length, Event Time Stamp, Errored Frame Seconds Summary Window, Errored Frame Seconds Summary Threshold, Errored Frame Seconds Summary, Error Running Total, Event Running Total	EVNT: M	Yes [ ] N/A [ ]
ET5	Organization Specific Event TLV structure	57.5.3.5	Contains the following fields: Event Type, Event Length, Organizationally Unique Identifier, Organization Specific Value	EVNT * OSE:M	Yes [ ] N/A [ ]
ET6	Organization Specific Event Organizationally Unique Identifier field	57.5.3.5	Contains 24-bit Organizationally Unique Identifier	EVNT * OSE:M	Yes [ ] N/A [ ]
ET7	Type values 0x05-0xFD	Table 57–12	Not to be sent	EVNT: M	Yes [ ] N/A [ ]
ET8	Type value 0xFF	Table 57–12	Not to be sent	EVNT: M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 279 of 717

57.7.5 Variables Descriptors and Containers

Item	Feature	Subclause	Value/Comment	Status	Support
VAR1	Variable Descriptor structure	57.6.1	As defined in Table 57–13	VAR * ACTV: M	Yes [ ] N/A [ ]
	Variable Descriptor / Variable Branch				
VAR2	references attributes	57.6.1	If an object or package is referenced, only attributes can be found within Variable Container	VAR * ACTV: M	Yes [ ] N/A [ ]
VAR3	does not reference actions	57.6.1	Actions are not found in Variable Containers	VAR * ACTV: M	Yes [ ] N/A [ ]
VAR4	Variable Container structure for an attribute	57.6.2	As defined in Table 57–14	VAR:M	Yes [ ] N/A [ ]
	Variable Container / Variable Branch				
VAR5	references attributes	57.6.2	If an object or package is referenced, only attributes can be found within Variable Container	VAR:M	Yes [ ] N/A [ ]
VAR6	does not reference actions	57.6.2	Actions are not found in Variable Containers	VAR:M	Yes [ ] N/A [ ]
VAR7	Type value 0x00	Table 57–16	Not to be sent	VAR:M	Yes [ ] N/A [ ]
VAR8	Type values 0x02-0x1F	Table 57–16	Not to be sent	VAR:M	Yes [ ] N/A [ ]
VAR9	Type values 0x25-0x2F	Table 57–16	Not to be sent	VAR:M	Yes [ ] N/A [ ]
VAR10	Type values 0x45-0x5F	Table 57–16	Not to be sent	VAR:M	Yes [ ] N/A [ ]
VAR11	Type values 0x65-0x7F	Table 57–16	Not to be sent	VAR:M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 280 of 717

58. Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 (Long Wavelength) and 100BASE-BX10 (BiDirectional Long Wavelength)

58.1 Overview

The 100BASE-LX10 and 100BASE-BX10 PMD sublayers provide point-to-point 100 Mb/s Ethernet links over a pair of single-mode fibers or an individual single-mode fiber, respectively, up to at least 10 km. They complement 100BASE-TX (twisted-pair cable, see Clause 25) and 100BASE-FX (multimode fiber, see Clause 26).

This clause specifies the 100BASE-LX10 PMD and the 100BASE-BX10 PMDs for operation over single-mode fiber. A PMD is connected to the 100BASE-X PMA of 66.1, and to the medium through the MDI. A PMD is optionally combined with the management functions that may be accessible through the management interface defined in Clause 22 or by other means.

Table 58–1 shows the primary attributes of each PMD type.

Table 58–1—Classification of 100BASE-LX10 and 100BASE-BX10

Description	100BASE-LX10	100BASE-BX10-D	100BASE-BX10-U	Unit
Fiber type	B1.1, B1.3 SMF[a]			
Number of fibers	2	1		
Typical transmit direction	Any	Downstream	Upstream	
Nominal transmit wavelength	1310	1550	1310	nm
Minimum range	0.5 m to 10 km			
Maximum channel insertion loss[b]	6.0	5.5	6.0	dB

[a]Specified in IEC 60793-2
[b]At the nominal wavelength

A 100BASE-LX10 link uses 100BASE-LX10 PMDs at each end while a 100BASE-BX10 link uses a 100BASE-BX10-D PMD at one end and a 100BASE-BX10-U PMD at the other. Typically the 1550 nm band is used to transmit away from the center of the network (“downstream”) and the 1310 nm band towards the center (“upstream”), although this arrangement, or the notion of hierarchy, is not required. The suffixes “D” and “U” indicate the PMDs at each end of a link which transmit in these directions and receive in the opposite directions.

Two optional temperature ranges are defined; see 58.8.4 for further details. Implementations may be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

58.1.1 Goals and objectives

The following are the objectives of 100BASE-LX10 and 100BASE-BX10:

a) Point to point on optical fiber
b) 100BASE-X up to at least 10 km over single-mode fiber (SMF)
c) BER better than or equal to 10^{-12} at the PHY service interface.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 281 of 717

58.1.2 Positioning of this PMD set within the IEEE 802.3 architecture

Figure 58–1 depicts the relationships of the PMD (shown shaded) with other sublayers and the ISO/IEC Open System Interconnection (OSI) reference model.

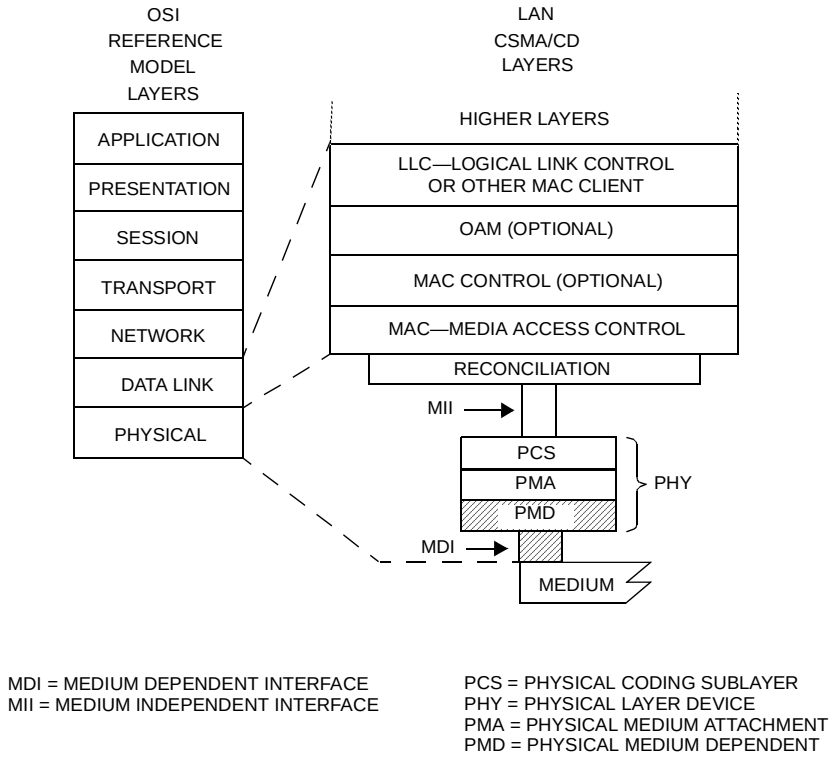


Figure 58–1—100BASE-LX10 and 100BASE-BX10 PMDs relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model and the IEEE 802.3 CSMA/CD LAN model

58.1.3 Terminology and conventions

The following list contains references to terminology and conventions used in this clause:

Basic terminology and conventions, see 1.1 and 1.2.

Normative references, see 1.3.

Definitions, see 1.4.

Abbreviations, see 1.5.

Informative references shown referenced in the format [Bn], see Annex A.

Introduction to 100 Mb/s baseband networks, see Clause 21.

Introduction to Ethernet for subscriber access networks, see Clause 56..

58.1.4 Physical Medium Dependent (PMD) sublayer service interface

The following specifies the services provided by the 100BASE-LX10 and 100BASE-BX10 PMDs. These PMD sublayer service interfaces are described in an abstract manner and do not imply any particular implementation.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 282 of 717

The PMD service interface supports the exchange of NRZI encoded 4B/5B bit streams between the PMA and PMD entities. The PMD translates the serialized data of the PMA to and from signals suitable for the specified medium.

The following primitives are defined:

PMD_UNITDATA.request

PMD_UNITDATA.indicate

PMD_SIGNAL.indicate

58.1.4.1 Delay constraints

Delay requirements which affect the PMD layer are specified in 24.6. Of the budget, up to 12 ns is reserved for each of the transmit and receive functions of the PMD to account for those cases where the PMD includes a pigtail.

58.1.4.2 PMD_UNITDATA.request

This primitive defines the transfer of a serial data stream from the PMA to the PMD.

The semantics of the service primitive are PMD_UNITDATA.request(tx_bit). The data conveyed by PMD_UNITDATA.request is a continuous stream of bits where the tx_bit parameter can take one of two values: ONE or ZERO. The PMA continuously sends the appropriate stream of bits to the PMD for transmission on the medium, at a nominal 125 MBd signaling speed. Upon receipt of this primitive, the PMD converts the specified stream of bits into the appropriate signals at the MDI.

58.1.4.3 PMD_UNITDATA.indicate

This primitive defines the transfer of data from the PMD to the PMA.

The semantics of the service primitive are PMD_UNITDATA.indicate(rx_bit). The data conveyed by PMD_UNITDATA.indicate is a continuous stream of bits where the rx_bit parameter can take one of two values: ONE or ZERO. The PMD continuously sends a stream of bits to the PMA corresponding to the signals received from the MDI.

58.1.4.4 PMD_SIGNAL.indicate

This primitive is generated by the PMD to indicate the status of the signal being received from the MDI.

The semantics of the service primitive are PMD_SIGNAL.indicate(SIGNAL_DETECT). The SIGNAL_DETECT parameter can take on one of two values: OK or FAIL, indicating whether the PMD is detecting light at the receiver (OK) or not (FAIL). When SIGNAL_DETECT = FAIL, PMD_UNITDATA.indicate(rx_bit) is undefined. The PMD generates this primitive to indicate a change in the value of SIGNAL_DETECT.

NOTE—SIGNAL_DETECT = OK does not guarantee that PMD_UNITDATA.indicate(rx_bit) is known good. It is possible for a poor quality link to provide sufficient light for a SIGNAL_DETECT = OK indication and still not meet the specified bit error ratio.

58.2 PMD functional specifications

The 100BASE-X PMDs perform the transmit and receive functions that convey data between the PMD service interface and the MDI.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 283 of 717

58.2.1 PMD block diagram

The PMD sublayer is defined at the four reference points shown in Figure 58–2. Two points, TP2 and TP3, are compliance points. TP1 and TP4 are reference points for use by implementers. The optical transmit signal is defined at the output end of a patch cord (TP2), between 2 and 5 m in length, of single-mode fiber. Unless specified otherwise, all transmitter measurements and tests defined in 58.7 are made at TP2. The optical receive signal is defined at the output of the fiber optic cabling (TP3) connected to the receiver. Unless specified otherwise, all receiver measurements and tests defined in 58.7 are made at TP3.

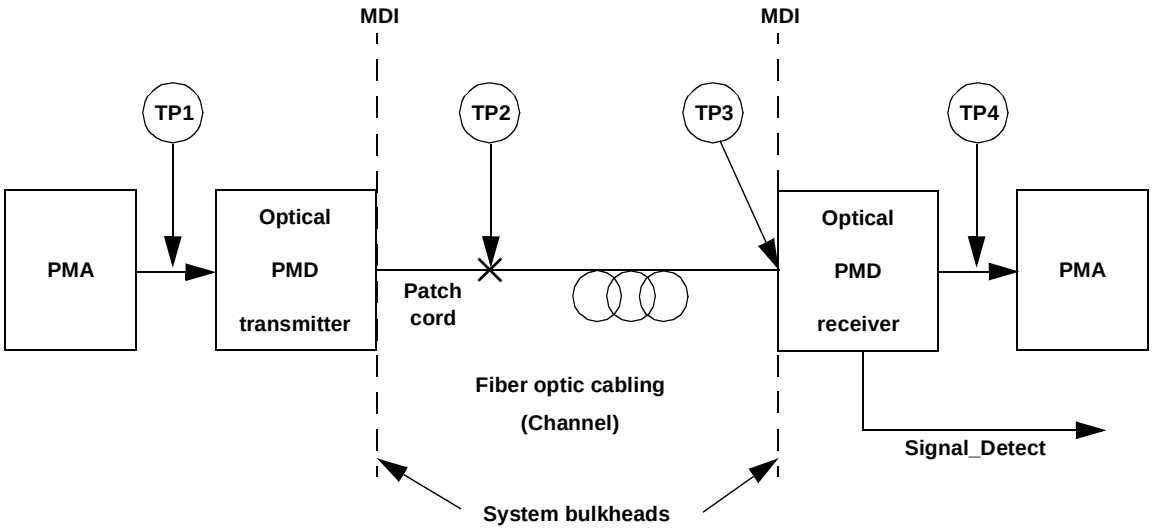


Figure 58–2—100BASE-X block diagram

The electrical specifications of the PMD service interface (TP1 and TP4) are not system compliance points (these are not readily testable in a system implementation). It is expected that in many implementations, TP1 and TP4 will be common between 100BASE-LX10, 100BASE-BX10-D, 100BASE-BX10-U, and 100BASE-FX (multimode fiber, see Clause 26).

58.2.2 PMD transmit function

The PMD transmit function shall convey the bits requested by the PMD service interface message PMD_UNITDATA.request(tx_bit) to the MDI according to the optical specifications in this clause. The higher optical power level should correspond to tx_bit = ONE.

NOTE—Because the NRZI coding distinguishes between a transition and no transition on the line, as opposed to 0 and 1, an inverted signal is usable.

58.2.3 PMD receive function

The PMD receive function shall convey the bits received from the MDI according to the optical specifications in this clause to the PMD service interface using the message PMD_UNITDATA.indicate(rx_bit). The higher optical power level should correspond to rx_bit = ONE.

NOTE—Because the NRZI coding distinguishes between a transition and no transition on the line, as opposed to 0 and 1, an inverted signal is usable.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 284 of 717

58.2.4 100BASE-LX10 and 100BASE-BX10 signal detect function

The PMD signal detect function shall report to the PMD service interface, using the message PMD_SIGNAL.indicate(SIGNAL_DETECT) which is signaled continuously. PMD_SIGNAL.indicate is intended to be an indicator of optical signal presence.

The value of the SIGNAL_DETECT parameter for 100BASE-LX10 and 100BASE-BX10 shall be generated according to the conditions defined in Table 58–2. The PMD receiver is not required to verify whether a compliant 100BASE-LX10 signal or 100BASE-BX10 signal is being received. This standard imposes no response time requirements on the generation of the SIGNAL_DETECT parameter.

Table 58–2—100BASE-LX10 and 100BASE-BX10 SIGNAL_DETECT value definition

Receive conditions		SIGNAL_DETECT value
100BASE-LX10	**100BASE-BX10**	
Average input optical power ≤ Signal detect threshold (min) in Table 58–4	Average input optical power ≤ Signal detect threshold (min) in Table 58–6	FAIL
Average input optical power ≥ Receiver sensitivity (max) in Table 58–4 with a compliant 100BASE-LX10 signal input	Average input optical power ≥ Receiver sensitivity (max) in Table 58–6 with a compliant 100BASE-BX10 signal input at the specified receiver wavelength	OK
All other conditions		Unspecified

As an unavoidable consequence of the requirements for the setting of the SIGNAL_DETECT parameter, implementations must provide adequate margin between the input optical power level at which the SIGNAL_DETECT parameter is set to OK, and the inherent noise level of the PMD due to cross talk, power supply noise, etc.

Various implementations of the signal detect function are permitted by this standard, including implementations that generate the SIGNAL_DETECT parameter values in response to the amplitude of the modulation of the optical signal and implementations that respond to the average optical power of the modulated optical signal.

58.3 PMD to MDI optical specifications for 100BASE-LX10

The operating range for 100BASE-LX10 is defined in Table 58–1. A 100BASE-LX10 compliant transceiver operates over the media types listed in Table 58–1 according to the specifications described in 58.9. A transceiver which exceeds the operational range requirement while meeting all other optical specifications is considered compliant.

NOTE—In this subclause and 58.4, the specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is explained in 58.7.6.

58.3.1 Transmitter optical specifications

The 100BASE-LX10 transmitter's signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 58–3 per measurement techniques described in 58.7. Its RIN_{12}OMA should meet the value listed in Table 58–3 per measurement techniques described in 58.7.7.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 285 of 717

Table 58–3—100BASE-LX10 transmit characteristics

Description	Type B1.1, B1.3 SMF	Unit
Transmitter type[a]	Longwave laser	
Signaling speed (range)	125 ± 50 ppm	MBd
Operating wavelength range[b]	1260 to 1360	nm
RMS spectral width (max)	7.7	nm
Average launch power (max)	–8	dBm
Average launch power (min)	–15	dBm
Average launch power of OFF transmitter (max)	–45	dBm
Extinction ratio (min)	5	dB
$RIN_{12}OMA$[c] (max)	–110	dB/Hz
Optical return loss tolerance (max)	12	dB
Launch OMA (min)	–14.8 (33.1)	dBm (μW)
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3, Y4}	{0.18, 0.29, 0.35, 0.35, 0.38, 0.4, 0.55}	UI
Transmitter and dispersion penalty (max)	4.5	dB
Decision timing offsets for transmitter and dispersion penalty (min)	±1.6	ns

[a]The nominal transmitter type is not intended to be a requirement on the source type, and any transmitter meeting the transmitter characteristics specified may be substituted for the nominal transmitter type.
[b]The great majority of the transmitted spectrum must fall within the operating wavelength range, see 58.7.2.
[c]The $RIN_{12}OMA$ recommendation is informative not mandatory.

58.3.2 Receiver optical specifications

The 100BASE-LX10 receiver's signaling speed, operating wavelength, damage, overload, sensitivity, reflectivity and signal detect shall meet the specifications defined in Table 58–4 per measurement techniques defined in 58.7. Its stressed receive characteristics should meet the values listed in Table 58–4 per measurement techniques described in 58.7.11. The receiver sensitivity includes the extinction ratio penalty.

A compliant receiver may be shown to deliver an error ratio lower than that in the table at the received power shown in the table, or shown to deliver an error ratio lower than 10^{-10} at a received power 1 dB lower than the value in the table. Sensitivity measurement is described in 58.7.10. Similarly, stressed receiver conformance may be shown for the error ratio and power shown in the table, or for 10^{-10} and 1 dB lower power. The 10^{-10} limits are more demanding but can be verified more accurately with reasonable test times.

Table 58–4—100BASE-LX10 receive characteristics

Description	Type B1.1, B1.3 SMF	Unit
Signaling speed (range)	125 ± 50 ppm	MBd
Operating wavelength range	1260 to 1360	nm
Bit error ratio (max)	10^{-12}	

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 286 of 717

Table 58–4—100BASE-LX10 receive characteristics *(continued)*

Description	Type B1.1, B1.3 SMF	Unit
Average received power[a] (max)	–8	dBm
Receiver sensitivity (max)	–25	dBm
Receiver sensitivity as OMA (max)	–24.8 (3.3)	dBm (μW)
Receiver reflectance[b] (max)	–12	dB
Stressed receiver sensitivity[c]	–20.1	dBm
Stressed receiver sensitivity as OMA (max)	–19.9 (10.2)	dBm (μW)
Vertical eye-closure penalty[d] (min)	3.7	dB
Stressed eye jitter (min)	0.25	UI pk-pk
Jitter corner frequency	20	kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15	UI
Signal detect threshold (min)	–45	dBm

[a]The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having a power level equal to the average received power (max) plus at least 1 dB.
[b]See 1.4 for definition of reflectance.
[c]The stressed receiver sensitivity is optional.
[d]Vertical eye closure penalty and the jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.

58.4 PMD to MDI optical specifications for 100BASE-BX10

The operating range for 100BASE-BX10 is defined in Table 58–1. A 100BASE-BX10-D or 100BASE-BX10-U compliant transceiver operates over the media types listed in Table 58–1 according to the specifications described in 58.9. A transceiver which exceeds the operational range requirement while meeting all other optical specifications is considered compliant.

NOTE—In this subclause and 58.3, the specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is explained in 58.7.6.

58.4.1 Transmit optical specifications

The 100BASE-BX10 transmitters' signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 58–5 per measurement techniques described in 58.7. Its $RIN_{12}OMA$ should meet the value listed in Table 58–5 per measurement techniques described in 58.7.7.

Table 58–5—100BASE-BX10 transmit characteristics

Description	100BASE-BX10-D	100BASE-BX10-U	Unit
Nominal transmitter type[a]	Longwave laser		
Signaling speed (range)	125 ± 50 ppm		MBd
Operating wavelength range[b]	1480 to 1580	1260 to 1360	nm
RMS spectral width (max)	4.6	7.7	nm

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 287 of 717

Table 58–5—100BASE-BX10 transmit characteristics *(continued)*

Description	100BASE-BX10-D	100BASE-BX10-U	Unit
Average launch power (max)	–8		dBm
Average launch power (min)	–14		dBm
Average launch power of OFF transmitter (max)	–45		dBm
Extinction ratio (min)	6.6		dB
$RIN_{12}OMA$[c] (max)	–110		dB/Hz
Optical return loss tolerance (max)	12		dB
Launch OMA (min)	–12.9 (51.0)		dBm (μW)
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3, Y4}	{0.18, 0.29, 0.35, 0.35, 0.38, 0.4, 0.55}		UI
Transmitter and dispersion penalty (max)	4.5		dB
Decision timing offsets for transmitter and dispersion penalty (min)	±1.6		ns

[a]The nominal transmitter type is not intended to be a requirement on the source type, and any transmitter meeting the transmitter characteristics specified may be substituted for the nominal transmitter type.
[b]The great majority of the transmitted spectrum must fall within the operating wavelength range, see 58.7.2.
[c]The $RIN_{12}OMA$ recommendation is informative not mandatory.

58.4.2 Receiver optical specifications

The 100BASE-BX10 receivers' signaling speed, operating wavelength, damage, overload, sensitivity, reflectivity and signal detect shall meet the specifications defined in Table 58–6 per measurement techniques defined in 58.7. Its stressed receive characteristics should meet the values listed in Table 58–6 per measurement techniques described in 58.7.11. The receiver sensitivity includes the extinction ratio penalty.

Table 58–6—100BASE-BX10 receive characteristics

Description	100BASE-BX10-D	100BASE-BX10-U	Unit
Signaling speed (range)	125 ± 50 ppm		MBd
Operating wavelength range[a]	1260 to 1360	1480 to 1600	nm
Bit error ratio (max)	10^{-12}		
Average received power[b] (max)	–8		dBm
Receiver sensitivity (max)	–28.2		dBm
Receiver sensitivity as OMA (max)	–27.1 (1.94)		dBm (μW)
Receiver reflectance[c] (max)	–12		dB
Stressed receiver sensitivity[d]	–23.3		dBm
Stressed receiver sensitivity as OMA (max)	–22.3 (6.0)		dBm (μW)
Vertical eye-closure penalty[e] (min)	3.8		dB

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 288 of 717

Table 58–6—100BASE-BX10 receive characteristics *(continued)*

Description	100BASE-BX10-D	100BASE-BX10-U	Unit
Stressed eye jitter (min)	0.25		UI pk-pk
Jitter corner frequency	20		kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15		UI
Signal detect threshold (min)	–45		dBm

[a]The receiver wavelength range of 100BASE-BX10-U is wider than the associated transmitter to allow interoperation with existing implementations of 100 Mb/s bi-directional transceivers.
[b]The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having a power level equal to the average received power (max) plus at least 1 dB.
[c]See 1.4 for definition of reflectance.
[d]The stressed receiver sensitivity is optional.
[e]Vertical eye closure penalty and jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.

A compliant receiver may be shown to deliver an error ratio lower than that in the table at the received power shown in the table, or shown to deliver an error ratio lower than 10^{-10} at a received power 1 dB lower than the value in the table. Sensitivity measurement is described in 58.7.10. Similarly, stressed receiver conformance may be shown for the error ratio and power shown in the table, or for 10^{-10} and 1 dB lower power. The 10^{-10} limits are more demanding but can be verified more accurately with reasonable test times.

58.5 Illustrative 100BASE-LX10 and 100BASE-BX10 channels and penalties (informative)

Illustrative channels and penalties for 100BASE-LX10 and 100BASE-BX10 are shown in Table 58–7.

NOTE—The budgets include an allowance for –12 dB reflection at the receiver.

Table 58–7—Illustrative 100BASE-LX10 and 100BASE-BX10 channels and penalties

Description	100BASE-LX10	100BASE-BX10-D	100BASE-BX10-U	Unit
Fiber type	B1.1, B1.3 SMF			
Measurement wavelength for fiber	1310	1550	1310	nm
Nominal distance	10			km
Available power budget	10	14.2		dB
Maximum channel insertion loss[a]	6.0	5.5	6.0	dB
Allocation for penalties[b]	4.0	8.7	8.2	dB

[a]The maximum channel insertion loss is based on the cable attenuation at the target distance and nominal measurement wavelength. The channel insertion loss also includes the loss for connectors, splices and other passive components.
[b]The allocation for penalties is the difference between the available power budget and the channel insertion loss; insertion loss difference between nominal and worst-case operating wavelength is considered a penalty. For 100BASE-X, it is possible for the allocation for penalties to be less than the TDP limit, as some penalties measured by TDP may arise in the receiver and need not be counted twice.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 289 of 717

58.6 Jitter at TP1 and TP4 for 100BASE-LX10 and 100BASE-BX10 (informative)

The entries in Table 58–8 represent high-frequency jitter (above 20 kHz) and do not include low frequency jitter or wander. The informative Table 58–8 shows jitter specifications which may be of interest to implementers. High probability jitter at TP2 is constrained by the eye mask. Total jitter at TP3 (and therefore at TP2 also) is constrained by the error detector timing offsets. High levels of high probability jitter at TP2, TP3 and TP4 are expected, caused by high probability baseline wander. The jitter difference between TP2 and TP3 is expected to be lower than for higher speed PMDs.

Table 58–8—100BASE-LX10 and 100BASE-BX10 jitter budget (informative)

[a]	Total jitter		High probability jitter (*W*)	
Reference point	**UI**	**ns**	**UI**	**ns**
TP1	0.09	0.72	0.05	0.40
TP2	0.40	3.2	0.305	2.44
TP3	0.43	3.54	0.305	2.44
TP4	0.51	4.04	0.305	2.44

[a]Informative jitter values are chosen to be compatible with the limits for eye mask and TDP (see 58.7.9). Because of the way the different components may interact, the differences in jitter between test points cannot be used to indicate a performance level of the intervening sections.

Total jitter in this table is defined at 10^{-12} BER. In a commonly used model,

$$TJ_{12} = 14.1\sigma + W \text{ at } 10^{12}. \quad (45\text{-}1)$$

The total jitter at 10^{-10} BER may be calculated assuming

$$TJ_{10} = 12.7\sigma + W \quad (45\text{-}2)$$

NOTE—As an example, TJ_{10} at TP1 is 0.085 UI (0.69 ns).

W is similar but not necessarily identical to deterministic jitter (DJ). A jitter measurement procedure is described in 58.7.12. Jitter at TP2 or TP3 is defined with a receiver of the same bandwidth as specified for the transmitted eye.

58.7 Optical measurement requirements

The following sections describe definitive patterns and test procedures for certain PMDs of this standard. Implementers using alternative verification methods must ensure adequate correlation and allow adequate margin such that specifications are met by reference to the definitive methods.

All optical measurements, except TDP and RIN, shall be made through a short patch cable, between 2 and 5 m in length.

NOTE—58.7.5, 58.7.6, 58.7.7, 58.7.9, 58.7.10, 58.7.11, and 58.7.12 apply to Clause 58, Clause 59, and Clause 60. Clause 59 (1000BASE-LX10) uses multimode fiber, although Clause 58 (100BASE-LX10 and 100BASE-BX10) and Clause 60 (1000BASE-PX10 and 1000BASE-PX20) do not.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 290 of 717

58.7.1 Test patterns

Compliance is to be achieved in normal operation. The definitive patterns for testing are shown in Table 58–9.

Table 58–9—List of test patterns and tests

Test pattern	Test	Related subclause
Valid 100BASE-X signal	Wavelength Spectral width	58.7.2
Valid balanced NRZI encoded 4B/5B bit stream	Optical power	58.7.3
Idle or far-end fault indication (see Clause 24)	Extinction ratio OMA RIN_xOMA	58.7.4 58.7.5 58.7.7
Optical frame based test pattern of 58.7.1.1	Eye mask TDP Receiver sensitivity Stressed receiver sensitivity Jitter measurements	58.7.8 58.7.9 58.7.10 58.7.11 58.7.12

58.7.1.1 100BASE-X optical frame based test pattern

Transmit eye mask, TDP and sensitivity are to be assured against the test pattern defined below. This represents an extremely untypical pattern. The BER in service can be expected to be lower than with the test pattern. In this clause, extinction ratio, OMA and RIN_xOMA are referred to the idle pattern (1010… for 4B/5B NRZI) or the nearly identical far-end fault indication.

The following test pattern is intended for frame based testing of the 100BASE-LX10 and 100BASE-BX10 PMDs. It contains compliant Ethernet frames with adequate user defined fields to allow them to be passed through a system to the point of the test. Further information on frame based testing is included in Annex 58A. The test suite and the recommended patterns are shown in Table 58–9.

NOTE—Users are advised to take care that the system under test is not connected to a network in service.

The test pattern shall be constructed as follows.

A test pattern for base line wander is composed of a sequence of three frames continuously repeated. Each frame has a 1500 octet length client data field and a zero length pad field. The contents of the destination address, source address, length/type fields and the first 32 octets of the client data field are at the discretion of the tester and may be implementation specific. The remaining 1468 octets of the client data field are filled with symbols with an even number of ones in the 4B/5B encoded data prior to NRZI transmission as shown in Table 58–10.

Frames are separated by a near minimum inter-packet gap (IPG) of 14 octets.

Within the limits of the three bit maximum run length of the 4B/5B code this sequence gives a near worst case ISI pattern and provides alternating periods of high and low transition density to test clock and data recovery (CDR) performance.

The first 32 octets of the client data field are configured such that, after the frame check sequence (FCS) is added, there are an even number of ones in the first two packets and an odd number of ones in the third packet. This results in a six frame sequence on the line (after NRZI) with three frames containing near 40% ones density and three frames with near 60% ones density. Table 58–11 shows a pattern, nearly identical to the pattern in Table 58–10, that ends in 0 rather than 1 and can be used to join a 40% section to a 60% section. The “flipping” content causes a different frame check sequence which in turn causes the following idle to be inverted.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 291 of 717

When transmitted with a near minimum inter-packet gap the resulting data stream has baseline wander at 1.35 kHz. In the example shown, IEEE Std 802.2 logical link control headers are used to form TEST command PDUs with null DSAP and SSAP addresses.

Table 58–10—Example unbalanced pattern

Item	Number of octets	Code-group name or hexa-decimal value	TXD<3:0>[a] (binary)		4B/5B encoded (binary)		NRZI encoded (binary)			
			1st nibble	2nd nibble	1st code-group[b]	2nd code-group	40% mark ratio		60% mark ratio	
Idle	13	I	Idle	Idle	11111	11111	10101	01010	01010	10101
Start-of-stream delimiter (SSD)	1	/J/K/			11000	10001	10000	11110	01111	00001
Remainder of preamble	6	55	0101	0101	01011	01011	01101	10010	10010	01101
Start of frame delimiter	1	D5	0101	1101	01011	11011	01101	01101	10010	10010
Destination address[c]	6	FF	1111	1111	11101	11101	01001	01001	10110	10110
Source address	6	00	0000	0000	11110	11110	01011	01011	10100	10100
Length/type	2	05	0101	0000	01011	11110	10010	10100	01101	01011
		DC	1100	1101	11010	11011	10011	01101	01100	10010
DSAP	1	00	0000	0000	11110	11110	01011	01011	10100	10100
SSAP	1	00	0000	0000	11110	11110	01011	01011	10100	10100
Control	1	F3	0011	1111	10101	11101	11001	01001	00110	10110
Implementation specific (example)	1	06	0110	0000	01110	11110	10100	10100	01011	01011
	28	00	0000	0000	11110	11110	10100	10100	01011	01011
Low transition density[d]	968	42	0010	0100	10100	01010	11000	01100	00111	10011
		24	0100	0010	01010	10100	01100	11000	10011	00111
Mixed	8	00	0000	0000	11110	11110	10100	10100	01011	01011
		D2	0010	1101	10100	11011	11000	10010	00111	01101
High transition density	484	07	0111	0000	01111	11110	01010	10100	10101	01011
		70	0000	0111	11110	01111	10100	01010	01011	10101
Mixed	8	00	0000	0000	11110	11110	10100	10100	01011	01011
		D2	0010	1101	10100	11011	11000	10010	00111	01101
Frame check sequence 1[e]	1	FF	1111	1111	11101	11101	10110	10110	01001	01001
Frame check sequence 2	1	13	0011	0001	10101	01001	00110	01110	11001	10001
Frame check sequence 3	1	9E	1110	1001	11100	10011	10111	00010	01000	11101
Frame check sequence 4	1	59	1001	0101	10011	01011	11101	10010	00010	01101

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 292 of 717

Table 58–10—Example unbalanced pattern *(continued)*

Item	Number of octets	Code-group name or hexa-decimal value	TXD<3:0>[a] (binary)		4B/5B encoded (binary)		NRZI encoded (binary)			
			1st nibble	2nd nibble	1st code-group[b]	2nd code-group	40% mark ratio		60% mark ratio	
End-of-stream delimiter (ESD)	1	/T/R/			01101	00111	01001	11010	10110	00101

[a]See Table 24–1
[b]The five bit code-groups are transmitted left most bit first.
[c]Use of the example broadcast address may cause problems in a system test; any unicast address is preferable. Other source and destination addresses may be chosen.
[d]The first row precedes the second row and the sub-sequence is repeated 16 times. This pattern can be varied to cause the disparity to remain the same or flip.
[e]The frame check sequence for another pattern may be calculated following 3.2.8 and Clause 24.

Table 58–11— Example unbalanced pattern to flip polarity

Item	Number of octets	Code-group name or hexa-decimal value	TXD<3:0> (binary)		4B/5B encoded (binary)		NRZI encoded (binary)			
			1st nibble	2nd nibble	1st code-group	2nd code-group	40% mark ratio		60% mark ratio	
Idle, SSD, preamble, SFD, DA, SA, Length/ type, DSAP, SSAP, Con-trol	38	As in Table 58–10								
Flipping	1	05	0101	0000	01011	11110	10010	10100	01101	01011
Implementa-tion specific, and pattern	1496	As in Table 58–10								
Frame check sequence 1	1	0B	1011	0000	10111	11110	11010	10100	00101	01011
Frame check sequence 2	1	E2	0010	1110	10100	11100	11000	10111	00111	01000
Frame check sequence 3	1	08	1000	0000	10010	11110	00011	01011	11100	10100
Frame check sequence 4	1	3B	1011	0011	10111	10101	00101	11001	11010	00110
End-of-stream delimiter (ESD)	1	/T/R/			01101	00111	10110	00101	01001	11010

NOTE—While it is expected that these frames will be counted by a DTE under test, the likelihood of additional behaviour means that the DTE should not be connected to a network in service while being tested.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 293 of 717

58.7.2 Wavelength and spectral width measurements

The wavelength and spectral width (RMS) shall meet specifications according to ANSI/EIA/TIA-455-127, under modulated conditions using a valid 100BASE-X signal.

NOTE—The great majority of the transmitted spectrum must fall within the operating wavelength range. The allowable range of central wavelengths is narrower than the operating wavelength range by the actual RMS spectral width at each extreme.

58.7.3 Optical power measurements

Optical power shall meet specifications according to the methods specified in ANSI/EIA-455-95. A measurement may be made with the port transmitting any valid balanced NRZI encoded 4B/5B bit stream.

58.7.4 Extinction ratio measurements

Extinction ratio shall meet specifications according to ANSI/TIA/EIA-526-4A with the port transmitting the NRZI encoded 4B/5B idle pattern (1010…) or far-end fault indication, that may be interspersed with OAM packets per 43B.2 and with minimal back reflections into the transmitter, lower than –20 dB. The extinction ratio is expected to be similar for other valid balanced NRZI encoded 4B/5B bit streams. The test receiver has the frequency response as specified for the transmitter optical waveform measurement.

58.7.5 Optical modulation amplitude (OMA) measurements (informative)

The normative way of measuring transmitter characteristics is extinction ratio and mean power. The following clause is intended to inform on how the OMA measurement is performed.

In this clause, OMA is the difference in optical power for “1” and “0” levels of the optical signal in an idle (10101… for 100BASE-LX10 and 100BASE-BX10) sequence or far-end fault indication. It may be found using waveform averaging or histogram means. The measurement is recommended to be equivalent to that described below.

The recommended technique for measuring optical modulation amplitude is illustrated in Figure 58–3. A fourth-order Bessel-Thomson filter as specified for measuring the transmitter concerned is to be used with the O/E converter. The measurement system consisting of the O/E converter, the filter and the oscilloscope is calibrated at the appropriate wavelength for the transmitter under test.

With the device under test transmitting the idle pattern or far-end fault indication, use the following procedure to measure optical modulation amplitude:

a) Configure the test equipment as illustrated in Figure 58–3.
b) Measure the mean optical power P_1 of the logic “1” as defined over the center 20% of the time interval, here 1 UI long, where the signal is in the high state.
c) Measure the mean optical power P_0 of the logic “0” as defined over the center 20% of the time interval, here 1 UI long, where the signal is in the low state.
d) OMA = $P_1 – P_0$.

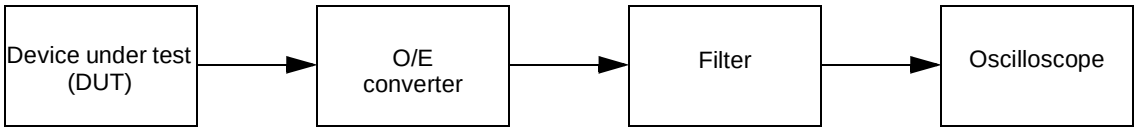


Figure 58–3—Recommended test equipment for measurement of optical modulation amplitude

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 294 of 717

A method of approximating OMA is shown in Figure 58–9.

Similarly, the optical power measure A_N is to be measured with a square wave pattern consisting of four to eleven consecutive ones followed by an equal run of zeros. Five ones followed by five zeroes is convenient (the /H/ code-group in 24, or K28.7 in 1000BASE-X which is the "Low-frequency test pattern" of 36A.2). The OMA of 52 is A_N, and OMA here may differ.

NOTE—This OMA measurement procedure applies to Clause 58, Clause 59, and Clause 60.

58.7.6 OMA relationship to extinction ratio and power measurements (informative)

The normative way of measuring transmitter characteristics is extinction ratio and mean power. The following clause is intended to inform on how the three quantities OMA, extinction ratio, and mean power, are related to each other.

Optical modulation amplitude (OMA) is the difference between light levels for "1" and "0". Extinction ratio is the ratio between light levels for "1" and "0". If a signal contains equal density of "1" and "0" bits, and does not suffer from duty cycle distortion, the mean power is close to the mean of the light levels for "1" and "0".

$$OMA = P_1 - P_0 \tag{45-3}$$

OMA may be expressed in Watts or dBm.

$$ER = \frac{P_1}{P_0} \tag{45-4}$$

Extinction ratio may be expressed in dB, as $10 \times \log_{10} (P_1 / P_0)$, or directly as a ratio. Sometimes extinction ratio is defined as P_0 / P_1.

$$P_{mean} \approx \frac{P_1 + P_2}{2} \tag{45-5}$$

Mean power may be expressed in Watts or dBm.

P_1 and P_0 are usually measured with a standardized instrument bandwidth to reduce the effects of overshoot. It should be noted that the values of P_1 and P_0 depend on the measurement technique and pattern to be used, which vary with PMD type. For some PMD types, e.g. 10GBASE, different patterns leading to different values of P_1 and P_0 are used for OMA on the one hand, and extinction ratio on the other.

Aside from these differences:

$$P_1 \approx 2 \times P_{mean} \times \frac{ER}{ER + 1} \tag{45-6}$$

$$P_0 \approx 2 \times \frac{P_{mean}}{ER + 1} \tag{45-7}$$

$$OMA \approx 2 \times P_{mean} \times \frac{ER - 1}{ER + 1} \tag{45-8}$$

Receiver sensitivity, which is an optical power, can be expressed in OMA or mean power terms according to the same relations.

NOTE—The OMA relationship to extinction ratio and power measurements applies to Clauses 52, 53, 58, 59, and 60.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 295 of 717

58.7.7 Relative intensity noise optical modulation amplitude (RIN_xOMA) measuring procedure

This procedure describes a component test that may not be appropriate for a system level test depending on the implementation. If used, the procedure is performed as described in 58.7.7.1, 58.7.7.2, and 58.7.7.3.

NOTE—This RIN_xOMA measurement procedure applies to Clause 58, Clause 59, and Clause 60.

58.7.7.1 General test description

The test arrangement is shown in Figure 58–4. The optical path between the Device Under Test (DUT) and the detector has a single discrete reflection with the specified optical return loss as seen by the DUT.

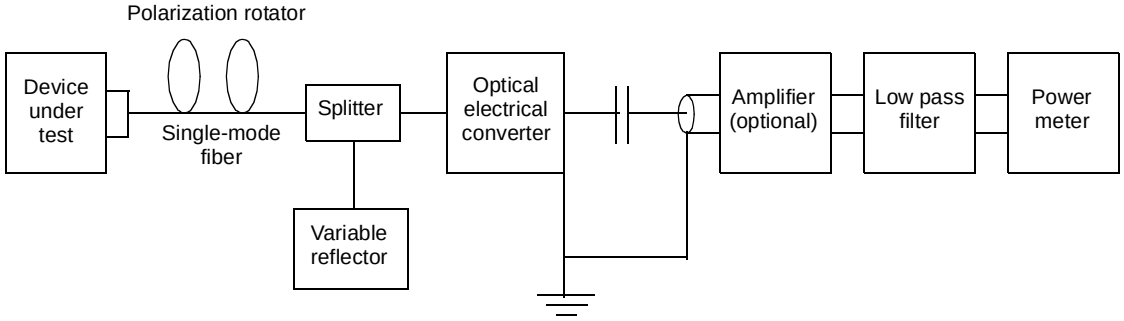


Figure 58–4—RIN_xOMA measurement setup

Both the OMA power and noise power are measured by AC coupling the O/E converter into the electrical power meter. If needed, an amplifier may be used to boost the signal to the power meter. A low pass filter is used between the photo detector and the power meter to limit the noise measured to the passband appropriate to the data rate of interest. In order to measure the noise, the modulation to the DUT is turned off.

58.7.7.2 Component descriptions

The optical path and detector combination must be configured for a single dominant reflection with an optical return loss as specified in the appropriate transmitter table, e.g. Table 58–3 (The optical return loss may be determined by the method of FOTP-107). The length of the fiber is not critical but should be in excess of 2 m.

The polarization rotator is capable of transforming an arbitrary orientation elliptically polarized wave into a fixed orientation linearly polarized wave.

If necessary, the noise may be amplified to a level consistent with accurate measurement by the power meter.

The upper –3 dB limit of the measurement apparatus is as specified for the transmitter optical waveform test. The bandwidth used in the RIN calculation takes the low-frequency cutoff of the DC blocking capacitor into consideration. The low-frequency cutoff is recommended to be less than 1 MHz. The filter should be placed in the circuit as the last component before the power meter so that any high-frequency noise components generated by the detector/amplifier are eliminated. If the power meter used has a very wide bandwidth, care should be taken to ensure that the filter does not lose its rejection at extremely high frequencies.

The RMS electrical power meter should be capable of being zeroed in the absence of input optical power to remove any residual noise.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 296 of 717

58.7.7.3 Test procedure

Use the following procedure to test relative intensity noise optical modulation amplitude:

a) With the DUT disconnected, zero the power meter;
b) Connect the DUT, turn on the laser, and ensure that the laser is not modulated;
c) Operate the polarization rotator while observing the power meter output to maximize the noise read by the power meter. Note the maximum power, P_N;
d) Turn on the modulation to the laser using the pattern specified for the PMD type (e.g. in 58.7.1 and 59.9.1) and note the power measurement, P_M. It may be necessary to change or remove the effective reflection to obtain an accurate reading;
e) Calculate RIN from the observed electrical signal power and noise power by use of the equation:

$$RIN_xOMA = 10 \times \log_{10} \frac{P_N}{BW \times P_M} \text{ [dB/Hz]} \quad (45\text{-}9)$$

Where:
RIN_xOMA = Relative Intensity Noise referred to optical modulation amplitude measured with x dB reflection,
P_N = Electrical noise power in Watts with modulation off,
P_M = Electrical power in Watts with modulation on,
BW = Low pass bandwidth of apparatus - high pass bandwidth of apparatus due to DC blocking capacitor [noise bandwidth of the measuring system (Hz)].

For testing multimode components or systems, the polarization rotator is removed from the setup and the single-mode fiber replaced with a multimode fiber. Step c) of the test procedure is eliminated.

58.7.8 Transmitter optical waveform (transmit eye)

The required transmitter pulse shape characteristics are specified in the form of a mask of the transmitter eye diagram as shown in Figure 58–5 for 100BASE-LX10 and 100BASE-BX10. Compliance is to be assured during system operation. The transmitter optical waveform of a port transmitting the test pattern specified for the PMD type, e.g. in 58.7.1, shall meet specifications according to the methods specified below.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 297 of 717

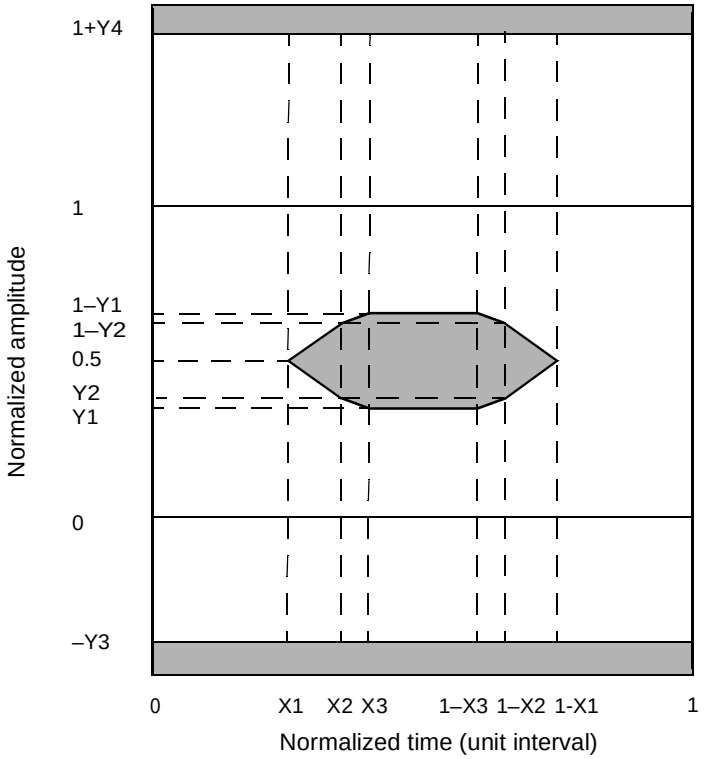


Figure 58–5—Transmitter eye mask definition

NOTE—This transmitter optical waveform measurement procedure applies to Clause 58, Clause 59, and Clause 60.

Normalized amplitudes of 0 and 1 represent the amplitudes of logic ZERO and ONE respectively. These are defined by the means of the lower and upper halves of the central 0.2 UI of the eye. 0 and 1 on the unit interval scale are to be determined by the eye crossing means. A clock recovery unit (CRU) may be used to trigger the scope for mask measurements as shown in Figure 58–6. It should have a high frequency corner bandwidth of less than or equal to the jitter corner frequency in the appropriate table for the transmitter's peer receiver, e.g. Table 58–4 or Table 58–6, and a slope of –20 dB/decade. The CRU tracks acceptable levels of low frequency jitter and wander. The frequency response of the measurement instrument (e.g. oscilloscope) extends substantially lower than the test pattern repetition frequency. A DC coupled instrument is convenient.

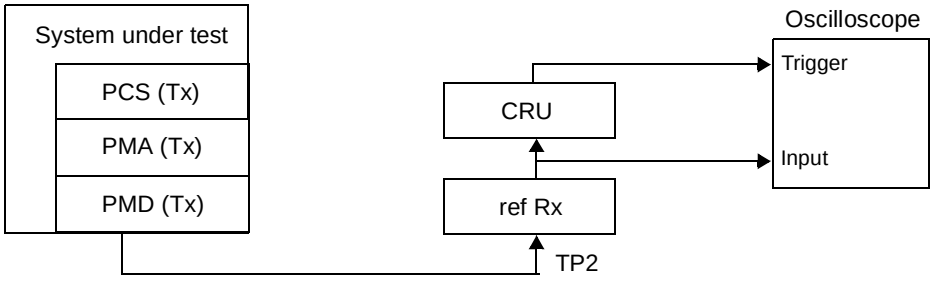


Figure 58–6—Transmitter optical waveform test block diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 298 of 717

For 100BASE-LX10 and 100BASE-BX10, the eye is measured with respect to the mask of the eye using a receiver with a fourth-order Bessel-Thomson response with nominal *fr* of 116.64 MHz as specified for STM-1 in ITU-T G.957, with the tolerances there specified. Receiver responses for other PMD types are specified in the appropriate clause. The Bessel-Thomson receiver is not intended to represent the noise filter used within a compliant optical receiver, but is intended to provide uniform measurement conditions at the transmitter.

The transmitter shall achieve a hit ratio lower than 5×10^{-5} hits per sample, where "hits" are the number of samples within the grey areas of Figure 58–5, and the sample count is the total number of samples from 0 to 1 UI.

NOTE—As an example, if an oscilloscope records 1350 samples/screen, and the timebase is set to 0.2 UI/div with 10 divisions across the screen, and the measurement is continued for 200 waveforms, then a transmitter with an expectation of less than 6.75 hits is compliant:

$$5 \times 10^{-5} \times 200 \times \frac{1350}{(0.2 \times 10)} = 6.75 \quad (45\text{-}10)$$

Likewise, if a measurement is continued for 1000 waveforms, then an expectation of less than 33.75 hits is compliant. An extended measurement is expected to give a more accurate result, and a single reading of 6 hits in 200 waveforms would not give a statistically significant pass or fail. Measurements to "zero hits", which involve finding the position of the worst single sample in the measurement, have degraded reproducibility because random processes cause the position of such a single low-probability event to vary.

The hit ratio limit has been chosen to avoid misleading results due to transmitter and oscilloscope noise, and to give the best correlation to transmitter penalty; see 58.7.9.5.

Further information on optical eye pattern measurement procedures may be found in IEC 61280-2-2.

58.7.9 Transmitter and dispersion penalty (TDP) measurement

The TDP of a port transmitting the appropriate test pattern test shall meet specifications according to the methods specified below. The transmitter and dispersion penalty (TDP) measurement tests for transmitter impairments with chromatic effects for a transmitter to be used with single-mode fiber, and for transmitter impairments with modal (not chromatic) dispersion effects for a transmitter to be used with multimode fiber. Possible causes of impairment include intersymbol interference, jitter, RIN and mode partition noise. Meeting the separate requirements (e.g. eye mask, spectral characteristics) does not in itself guarantee the TDP. The procedure tests for pattern dependent effects; for 100BASE-LX10 and 100BASE-BX10, a standardized element of pattern dependent baseline wander is included in the reference channel.

Transmitter and dispersion penalty may be measured with apparatus shown in Figure 58–7, consisting of a reference transmitter, the transmitter under test, a controlled optical reflection, an optical attenuator, a test fiber, and a reference receiver system containing a reference receiver front end (optical to electrical converter), a transversal filter to emulate multimode fiber, if appropriate, and a bit error ratio tester. All BER and sensitivity measurements are made with the test patterns specified for the PMD type, e.g. in 58.7.1.

NOTES

1—This TDP measurement procedure applies to Clause 58, Clause 59, and Clause 60.

2—Multimode fiber is not used with 100BASE-LX10 or 100BASE-BX10.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 299 of 717

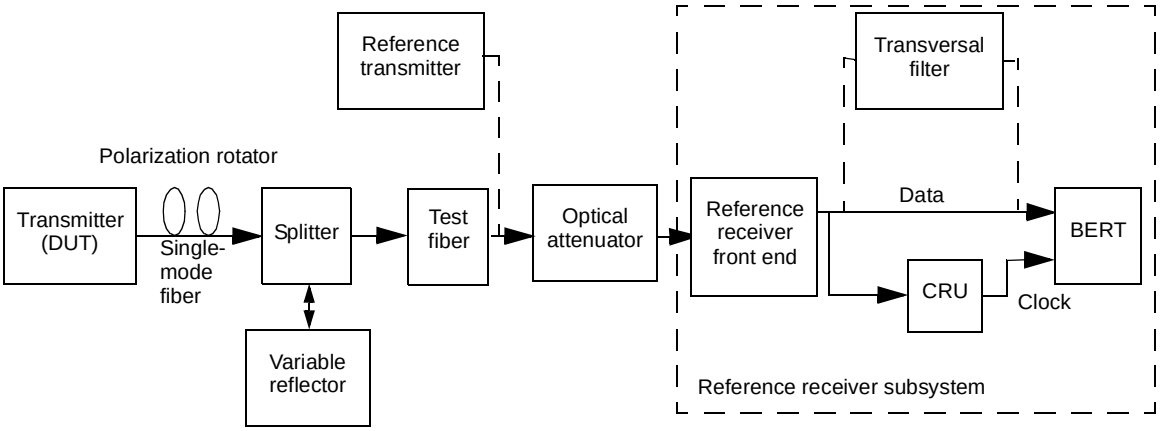


Figure 58–7—Test setup for measurement of transmitter and dispersion penalty

58.7.9.1 Reference transmitter requirements

The reference transmitter is a high-quality instrument-grade device, which can be implemented by a CW laser modulated by a high-performance modulator. It should meet the following basic requirements:

a) The rise/fall times should be less than 0.15 UI at 20% to 80%.
b) The output optical eye is symmetric and with good margin to the eye mask test for the transmitter (PMD) type under test.
c) In the center 20% region of the eye, the worst-case vertical eye closure penalty, as defined in 58.7.11.2, is less than 0.5 dB.
d) Jitter less than 0.20 UI peak-peak.
e) $RIN_{12}OMA$ should be minimized to less than –120 dB/Hz for 100BASE-X and –125 dB/Hz for 1000BASE-X.

58.7.9.2 Channel requirements

The transmitter is tested using an optical and electrical channel that meets the requirements specified for the PMD type listed in Table 58–12.

Table 58–12—Transmitter compliance channel specifications

PMD transmitter wavelength, fiber type	Optical channel			Electrical channel
	Dispersion[a] (ps/nm)		Optical return loss[b] (max)	Differential delay (ps)
	Minimum	Maximum		
1310 nm band for SMF	$0.02325 \cdot L^{c} \cdot \lambda \cdot [1-(1324/\lambda)^4]$	$0.02325 \cdot L \cdot \lambda \cdot [1-(1300/\lambda)^4]$	See ORLT in Transmitter spec	N/A
1550 nm band for SMF	0	$0.02325 \cdot L \cdot \lambda \cdot [1-(1300/\lambda)^4]$		N/A

[a]The dispersion is specified for the actual wavelength of the device under test.
[b]The optical return loss is applied with respect to TP2.
[c]L is the upper operating range limit (reach) as defined e.g. in Table 58–1.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 300 of 717

A transmitter is to be compliant with a total dispersion at least as negative as the “minimum dispersion” and at least as positive as the “maximum dispersion” columns specified for the wavelength of the device under test. This may be achieved with a channel or channels consisting of fibers with lengths chosen to meet the dispersion requirements.

To verify that the fiber has the correct amount of dispersion, the measurement method defined in ANSI/TIA/EIA-455-175A-92 may be used. The measurement is made in the linear power regime of the fiber.

When emulating a multimode fiber link, the optical channel is a 2 to 5 m patch cord meeting the appropriate specifications. In this case, the link bandwidth is emulated in the electrical domain.

The channel provides a maximum optical return loss specified as “Optical return loss tolerance (maximum)” in the specification of the transmitter under test. For a single-mode fiber channel, the state of polarization of the back reflection is adjusted to create the greatest RIN. The methods of 58.7.7.2 and 58.7.7.3 may be used.

The BERT’s receiver sensitivity must be adequate to meet the BER with the worst-case test signal and minimum attenuation.

58.7.9.3 Reference receiver requirements

The reference receiver system should have the bandwidth specified for the transmitter optical waveform measurement for the transmitter under test. The sensitivity of the reference receiver system should be limited by Gaussian noise. The receiver system should have minimal threshold offset, deadband, hysteresis, deterministic jitter or other distortions. Decision sampling should be instantaneous with minimal uncertainty and setup/hold properties. When testing 100BASE-X optical transmitters, the receiver should have a passband not extending below 10 kHz at the –3 dBe (electrical) point, so as to emulate the pattern-induced baseline wander expected in a compliant receiver.

For all transmitter and dispersion penalty measurements, determination of the center of the eye is required. The center of the eye is defined as the time halfway between the left and right sampling points within the eye where the measured BERs are equal to each other, and greater than or equal to 10^{-3} (the BER at the eye center is much lower). The decision threshold is to occur at the average signal level.

For a transmitter to be used with multimode fiber the reference receiver is followed by a transversal filter with two equal amplitude paths with a differential delay as specified for the transmitter. In this case, the receiver front end should be operating in its linear regime (not clipping). For a transmitter to be used with single-mode fiber, the transversal filter is not used.

The clock recovery unit (CRU) used in the TDP measurement has a corner frequency of less than or equal to the jitter tolerance frequency specified for the appropriate receiver (the peer PMD to the transmitter under test), and a slope of 20 dB/decade. When using a clock recovery unit as a clock for BER measurements, passing of low-frequency jitter from the data to the clock removes this low-frequency jitter from the measurement.

The nominal sensitivity of the reference receiver system, S, is measured in OMA using the apparatus described above but with a short patchcord in place of the test fiber and without any transversal filter. The sensitivity S must be corrected for any significant reference transmitter impairments including any vertical eye closure. It should be measured while sampling at the eye center or corrected for off-center sampling. It is calibrated at the wavelength of the transmitter under test. For 100BASE-LX10 and 100BASE-BX10, TDP includes a pattern dependent penalty. It may be inconvenient or impossible to obtain reference transmitters and receivers which are immune to this penalty. For these cases S may be measured with a benign pattern e.g. PRBS7.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 301 of 717

58.7.9.4 Test procedure

To measure the transmitter and dispersion penalty (TDP) the following procedure is used. The sampling instant is displaced from the eye center by the amount specified for decision timing offsets in e.g. Table 58–3 or Table 58–5. The following procedure is repeated for early and late decision and the larger TDP value is used:

a) Configure the test equipment as described above and illustrated in Figure 58–7.
b) Adjust the attenuation of the optical attenuator to obtain a BER of 10^{-12}. Extrapolation techniques may be used with care.
c) Record the optical power in OMA at the input to the reference receiver, P_DUT, in dBm.
d) If P_DUT is larger than S, the transmitter and dispersion penalty (TDP) for the transmitter under test is the difference between P_DUT and S, TDP = P_DUT - S. Otherwise the transmitter and dispersion penalty is zero, TDP = 0.

It is to be ensured that the measurements are made in the linear power regime of the fiber.

58.7.9.5 Approximate measures of TDP (informative)

Transmitter and dispersion penalty may be considered as a transmitter penalty (TP) followed by a dispersion penalty, which is also attributable to the transmitter. Measurements at TP2 can reveal the transmitter penalty. TP can be related to eye mask margin (MM) as follows.

In the absence of any noise or significant jitter,

$$\mathrm{TP} = 10 \times \log_{10}\left(\frac{1}{H}\right) \tag{45-11}$$

$$MM = \frac{H - M}{1 - M} \tag{45-12}$$

where H is height of inner eye and M is the height of the central polygon of the mask.

Transmitter noise or noise-like impairments degrade both apparent MM and actual TP. To obtain a useful correlation between the two, MM is defined to an appropriate percentile of measured samples, to give the right weight to this noise; see 58.7.8. Oscilloscope noise degrades apparent MM only. This would distort the correlation, but in many measurement circumstances the error is reduced at the appropriate percentile. The one-dimensional statistics of MM measurement and the hit ratio are related by the frequency of relevant bit patterns in a stream (typically 1/4 of bits are flanked by two opposite bits) and by a factor related to mask dimensions.

This approach could be applied to a situation with combinations of noise of jitter.

It may be feasible to correlate TDP to eye measurements at TP3. However, the signal at TP3 is weaker, so oscilloscope noise is more of a concern.

The following suggestions apply to 100 Mb/s optical PMDs.

In practice it may be necessary to do without the clock recovery unit at 100 Mb/s. Experimentally, timing stability at this rate may be acceptable, and the jitter due to the CRU could be accounted for by adjusting the eye mask length and the TDP decision timing offsets.

A significant component of TDP is baseline wander. A wander of ± OMA/10 will be created by many receivers if it is not already present in the transmitted signal. Higher levels of pattern dependent penalty can

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 302 of 717

in some cases be estimated from the mask margin (if necessary, by ignoring the upper and lower mask regions). The mask margin may also be measured with an AC coupled measurement instrument with a high pass filter of 10 kHz. It is likely that compliant implementations will pass the transmitter mask with both DC and AC coupling. Certain implementations may be characterized by comparing the transmitted signal with the STM-1 mask, using a benign pattern such as PRBS7.

The accuracy of these approaches have not been established by the committee. Oscilloscope measurements at TP3 may be degraded by instrument noise.

58.7.10 Receiver sensitivity measurements

Receiver sensitivity is defined for an ideal input signal. The test signal should have negligible impairments such as intersymbol interference (ISI), jitter and RIN (but see the end of this subclause). The test pattern shall be as specified in 58.7.1, 59.7.1 or 60.7.1 as appropriate. Sensitivity is defined by the specified bit error ratio, which may be determined by counting bit or byte errors or errored frames. Extrapolation techniques may be used with care. Sensitivity is measured at a low but compliant extinction ratio, and correction made for any difference between the measurement extinction ratio and the specified minimum extinction ratio. This assurance should be met with asynchronous data flowing out of the optical transmitter of the system under test. The output data pattern from the transmitter of the system under test is the same pattern as defined for this measurement.

The sampling point is set by the system under test. While this standard applies to complete data terminal equipment (DTE), the test may be used as a diagnostic for testing components with appropriate margin, in which case the sampling point should be set at the average optical power level and at the specified timing offsets from the eye center, which may be found as the mid-point between the 10^{-3} BER points.

An implementer may use a combination of extrapolation and margin to assure compliance. This can entail a statistical analysis which could be implementation specific. As an example, with a small margin, it might not be advisable to extrapolate beyond a limited optical power difference; this represents an extrapolation in BER terms which varies according to circumstance.

In the case of 100BASE-X, systematic baseline wander of the input signal is to be expected. This may be generated with AC coupling above 10 kHz within the transmitter, and/or with the interfering signal technique as described in 58.7.11.2. A standardized baseline wander of ± OMA/10 is defined for these PMD types. This causes some jitter in the test signal, which is acceptable.

For 100BASE-LX10 and 100BASE-BX10 only, sensitivities are defined for 10^{-12} and 10^{-10} bit error rates. It is sufficient to show compliance to either of these. The 10^{-10} limit is the more demanding but can be verified more accurately with reasonable test times.

NOTE—This receiver sensitivity measurement applies to Clause 58, Clause 59 and Clause 60.

58.7.11 Stressed receiver conformance test

The stressed receiver conformance test is intended to screen against receivers with poor frequency response or timing characteristics which could cause errors when combined with a distorted but compliant signal at TP3. Modal (MMF) or chromatic (SMF) dispersion can cause distortion. Stressed receiver tolerance testing may be performed in accordance with the requirements of 58.7.11.1, 58.7.11.2, and 58.7.11.3. If this test is applied the receiver shall be compliant to for example Table 58–4.

A receiver should receive a conditioned input signal that combines vertical eye closure and jitter according to this clause with BER specified in the receiver tables. This assurance should be met with asynchronous data flowing out of the optical transmitter of the system under test. The output data pattern from the transmitter of the system under test is to be the same pattern as defined for this measurement.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 303 of 717

NOTES—

1—The length of the test pattern, low signaling rate and narrow rate tolerance of 100BASE-X means that the input and output patterns beat very slowly. Long test times or a slight modification to the length of one pattern may be appropriate.

2—This stressed receiver conformance test applies to Clause 58, Clause 59 and Clause 60.

58.7.11.1 Stressed receiver conformance test block diagram

A block diagram for the receiver conformance test is shown in Figure 58–8. A pattern generator continuously generates a signal or test pattern as specified for the receiver under test, e.g. in 58.7.1. The optical test signal is conditioned (stressed) using the methodology, as defined in 58.7.11.2, while applying sinusoidal jitter, as specified e.g. in 58.7.11.4. The receiver of the system under test is tested for conformance by counting bit or byte errors or errored frames. The optical power penalty for the stressed eye is intended to be similar to its vertical eye closure penalty. This is not necessarily the same as the highest TDP anticipated in service, but represents a standardized test condition for the receiver.

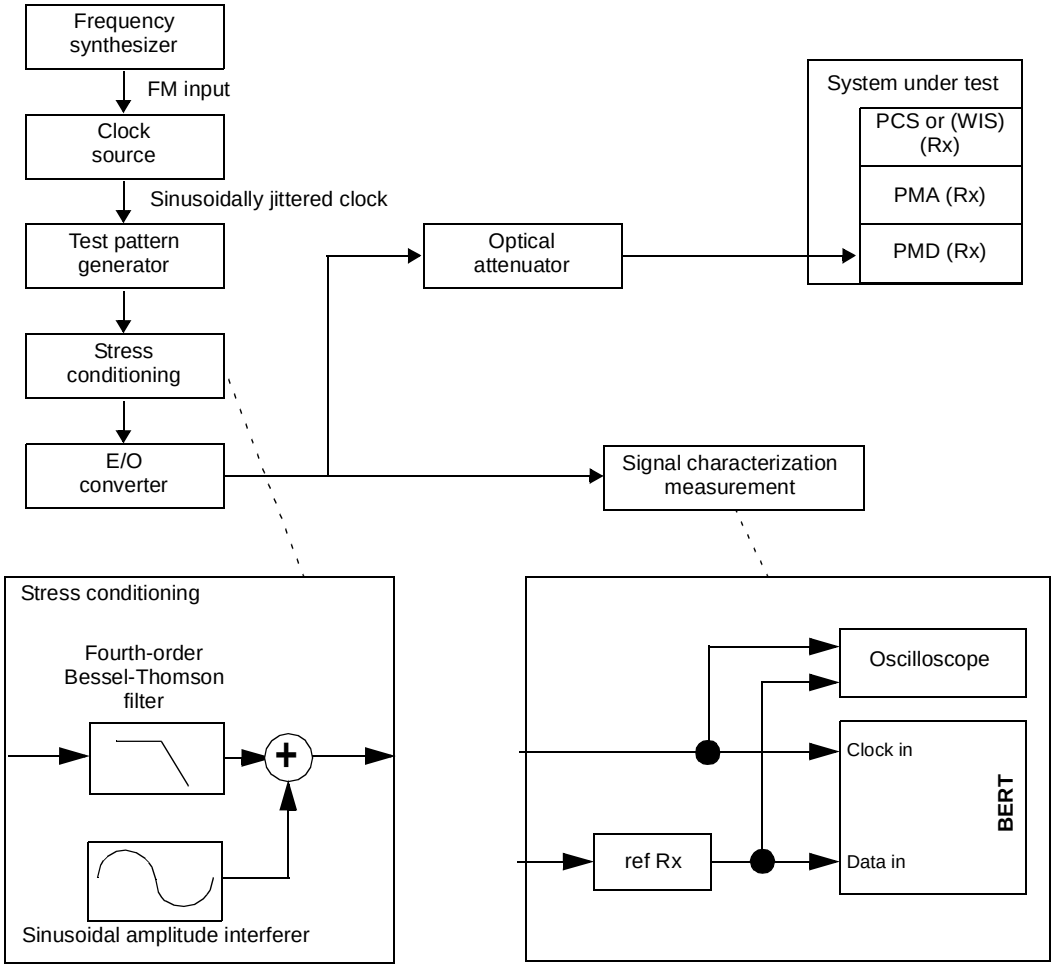


Figure 58–8—Stressed receiver conformance test block diagram

A suitable test set is needed to characterize and verify that the signal used to test the receiver has the appropriate characteristics. The test fiber called out for single-mode fiber based PMD layers and the transversal filter called out to emulate multimode fiber are not needed to characterize the receiver input signal; nor are they used during testing.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 304 of 717

The fourth-order Bessel-Thomson filter is used to create ISI-induced vertical eye closure. The sinusoidal amplitude interferer causes additional eye closure, but in conjunction with the slowed edge rates from the filter, also causes jitter. The nature of the jitter is intended to emulate instantaneous bit shrinkage that can occur with DDJ. This type of jitter cannot be created by simple phase modulation. The sinusoidal phase modulation represents other forms of jitter and also verifies that the receiver under test can track low-frequency jitter.

For improved visibility for calibration, it is imperative that the Bessel-Thomson filter and all other elements in the signal path (cables, DC blocks, E/O converter, etc.) have wide and smooth frequency response and linear phase response throughout the spectrum of interest. Overshoot and undershoot should be minimized. If this is achieved, then data dependent effects should be minimal, and short data patterns can be used for calibration with the benefit of providing much improved trace visibility on sampling oscilloscopes. Actual patterns for testing the receiver are specified in the appropriate clause.

To further improve visibility for calibration, random noise effects, such as RIN and random clock jitter, should also be minimized. A small amount of residual noise and jitter from all sources is unavoidable, but should be less than 0.25 UI peak-peak of jitter.

The test pattern generator, filter and E/O converter should together have a frequency response to result in the appropriate level of initial ISI eye closure before the sinusoidal terms are added. The E/O converter should have a linear response if electrical summing is used, linearity of all elements including the E/O modulator is critical. Summing with an optical coupler after the modulator is an option that eases linearity requirements, but requires a second source for the interfering signal, will complicate settings of extinction ratio, and will add more RIN. In either case, a typical optical transmitter with built-in driver is not linear and not suitable.

The vertical and horizontal eye closures to be used for receiver conformance testing are verified using an optical reference receiver with the response specified for the appropriate transmitter (the peer PMD to the receiver under test) e.g. in 58.7.8. Use of standard tolerance filters may significantly degrade this calibration. Care should be taken to ensure that all the light from the fiber is collected by the fast photo detector and (if using multimode fiber) that there is negligible mode selective loss, especially in the optical attenuator and the optical coupler, if used. The reference receiver and oscilloscope should achieve adequately low noise and jitter.

The clock output from the clock source in Figure 58–8 will be modulated with the sinusoidal jitter. To use an oscilloscope to calibrate the final stressed eye jitter that includes the sinusoidal jitter component, a separate clock source (clean clock of Figure 58–8) is required that is synchronized to the source clock, but not modulated with the jitter source.

58.7.11.2 Stressed receiver conformance test signal characteristics and calibration

The conformance test signal is used to validate that the PMD receiver meets BER requirements with near worst case waveforms at TP3 including pulse width shrinkage, power, simulated channel penalties, and a swept frequency sinusoidal jitter contribution.

Signal characteristics are described below along with a suggested approach for calibration.

The test signal includes vertical eye closure and high-probability jitter components. Vertical eye closure is measured at the time center of the eye (halfway between 0 and 1 on the unit interval scale as determined by the eye crossing means) and is the vertical eye closure penalty (VECP) when calculated relative to the measured A_N value. J is measured at the average optical power, which can be obtained with AC coupling. The values of these components are defined as below by their histogram results. The vertical eye closure penalty is given in Equation 58-13:

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 305 of 717

$$\text{Vertical eye closure penalty [dB, optical]} = 10 \times \log_{10}\frac{A_N}{A_O} \quad (45\text{-}13)$$

where, A_O is the amplitude of the eye opening and A_N is the normal amplitude without ISI, as shown in Figure 58–9. A_N can be approximated with histograms as suggested in Figure 58–9. However, the definition for A_N is given in 58.7.5.

For this test, VECP is defined by the 99.95th percentile of the histogram of the lower half of the signal and the 0.05th percentile of the histogram of the upper half of the signal, and jitter is defined by the 0.5th and 99.5th percentiles of the jitter histogram. Histograms should include at least 10 000 hits, and should be about 1%-width in the direction not being measured. Residual low-probability noise and jitter should be minimized —that is, the outer slopes of the final histograms should be as steep as possible down to very low probabilities.

The following steps describe a suggested method for calibrating a stressed eye generator:

a) Set the signalling speed of the test-pattern generator as specified for the appropriate transmitter. Sinusoidal interference and jitter signals should be turned off at this point.
b) Turn on the calibration pattern. A repetitive pattern may be used for calibration if the conditions described in 58.7.11.1 are met, but this increases the risk that the longer test pattern used during testing will overstress the device under test.
c) Set the extinction ratio to approximately the extinction ratio (minimum) value as specified for the appropriate transmitter. If optical summing is used, the extinction ratio may need to be adjusted after the sinusoidal interference signal is added below.
d) Measure the settled signal amplitude A_N of the test signal (without attenuation). A_N may be measured according to 58.7.5 using a square wave pattern, although for the purposes of this clause, OMA is to be measured with a different pattern; A_N and OMA are not likely to be equal.
e) The requirements for vertical eye closure and jitter of the stressed eye test signal are given by the vertical eye closure penalty (VECP) and stressed eye jitter (J) values given in the appropriate receiver specification table.

   There are three components involved in calibration for vertical closure and J. These are a linear phase filter, sinusoidal interference, and sinusoidal jitter.

   In general, the majority of the vertical eye closure penalty value should be created by use of a linear phase, low jitter filter (such as Bessel-Thomson). In the case of 100BASE-X, the majority of the vertical eye closure penalty value should be created by baseline wander or sinusoidal interference. The filter should be tested with the prescribed test patterns to verify that residual jitter is small, less than 0.25 UI peak-peak. If not, the stress may be more than desired, leading to conservative results. However, compensation is not allowed. Once done, revert to the calibration pattern, if different than the specified test pattern.

   Any remaining vertical eye closure required must be created with sinusoidal interference or sinusoidal jitter.

   To emulate the effects of DCD or data-dependent jitter, at least 0.05 but no more than 0.15 UI peak-peak of pulse shrinkage jitter should have been achieved. This imposes a limit of less than 1.2 dB of vertical closure from sinusoidal interference, applied after vertical closure created by filtering.

   The frequency of the sinusoidal interference may be set at any frequency between B / 100 and B / 5 where B is the signalling speed, although care should be taken to avoid a harmonic relationship between the sinusoidal interference, the sinusoidal jitter, the signalling speed and the pattern repetition rate.
   Sinusoidal jitter (phase modulation) must be added according to the appropriate jitter specification. For calibration purposes, sinusoidal jitter frequencies must be well within the flat portion of the tem-

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 306 of 717


plate above the corner frequency.

Iterate the filter bandwidth and the settings for sinusoidal interference and/or jitter until all constraints are met, including jitter (J), vertical eye closure penalty (VECP), and that sinusoidal jitter above the corner frequency is as specified.

Verify that the optical power penalty for the stressed eye (relative to the reference transmitter per 58.7.9.1) is greater than or equal to VECP.

f) Decrease the amplitude with the optical attenuator until the OMA complies with the OMA values specified for the receiver under test.

g) For testing, turn on the actual required test pattern(s).

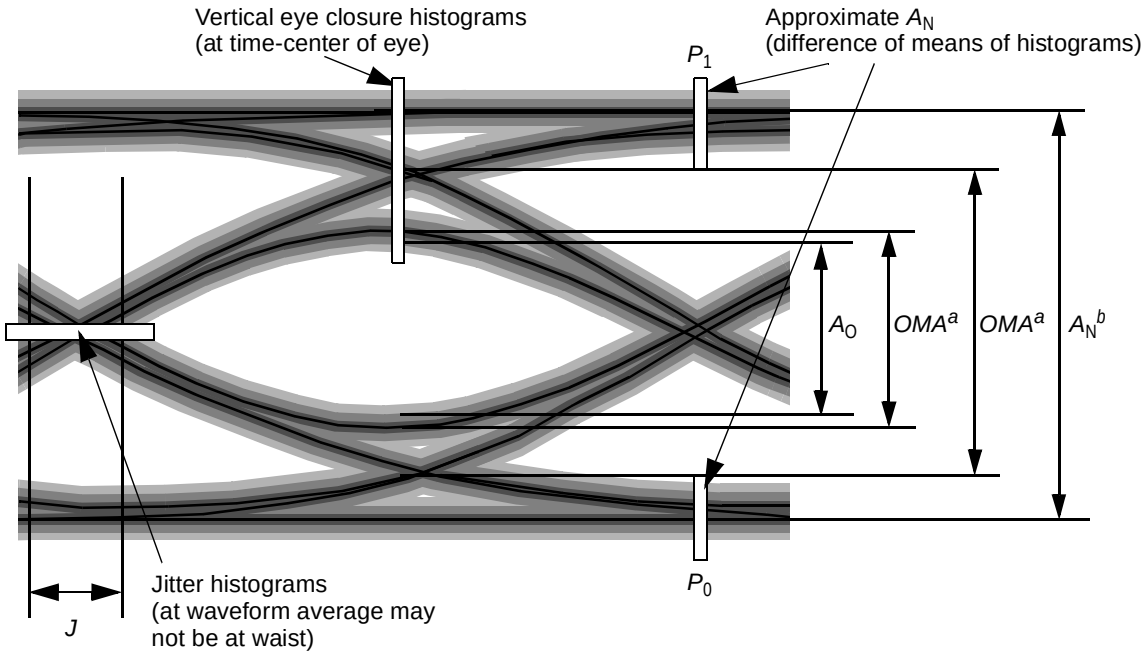

[a]This measure of OMA on the eye of the conformance test signal differs between 100BASE-X, 1000BASE-X and 10GBASE-R/W.
[b]This is also OMA for 10GBASE-R/W.

Figure 58–9—Required characteristics of the conformance test signal at TP3

Care should be taken when characterizing the signal used to make receiver tolerance measurements. In the case of a transmit jitter measurement, excessive and/or uncalibrated noise/jitter in the test system makes it more difficult to meet the specification and may have a negative impact on yield but will not effect interoperability. Running the receiver tolerance test with a signal that is under-stressed may result in the deployment of non-compliant receivers. Care should be taken to minimize and/or correct for the noise/jitter introduced by the reference receiver, filters, oscilloscope, and BERT. While the details of measurement and test equipment are beyond the scope of this standard it is recommended that the implementers fully characterize their test equipment and apply appropriate guard bands to ensure that the receive input signal meets the specified requirements.

58.7.11.3 Stressed receiver conformance test procedure

The test apparatus is set up as described in 58.7.11.1 and 58.7.11.2. The sinusoidal jitter is then stepped across the specified frequency and amplitude range while monitoring errors at the receiver. The BER is to be

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 307 of 717

compliant at all jitter frequencies in the specified frequency range. This method does not result in values for jitter contributed by the receiver. It does, however, ensure that a receiver meeting the requirements of this test will operate with the worst-case optical input.

58.7.11.4 Sinusoidal jitter for receiver conformance test

The sinusoidal jitter is used to test receiver jitter tolerance. Sinusoidal jitter may vary over a magnitude range as required to accurately calibrate a stressed eye per 58.7.11.2. The range is limited by the constraints of Table 58–13 as illustrated in Figure 58–10, where f2, SJ1 and SJ2 are specified in the appropriate receiver table: Table 58–4, Table 58–6, Table 59–6, Table 59–8, Table 60–5, Table 60–6 or Table 60–9. The frequency f2 is specified as "Jitter corner frequency" in the receiver tables. SJ1 and SJ2 are defined as "sinusoidal jitter limits for stressed receiver conformance test (min, max)" in e.g. Table 58–4.

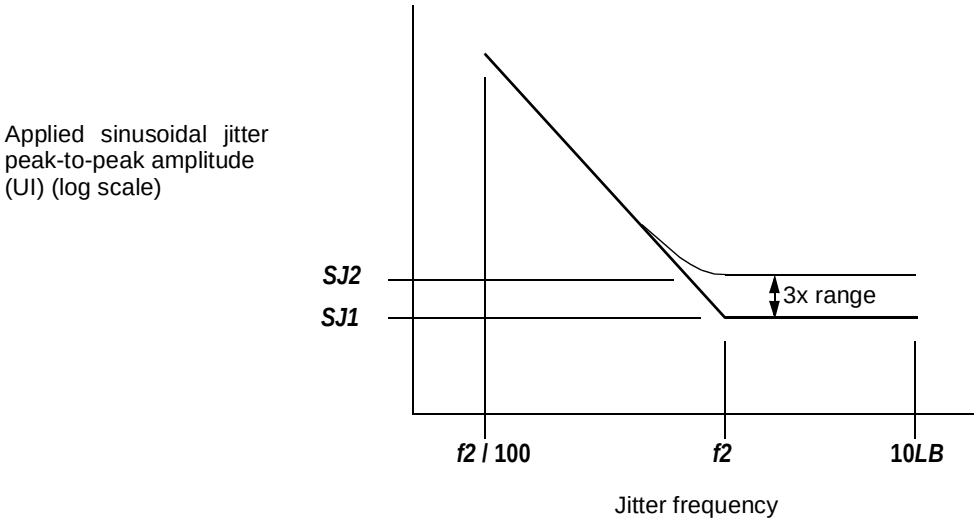


Figure 58–10—Mask of the sinusoidal component of jitter tolerance (informative)

Table 58–13—Applied sinusoidal jitter

Frequency range	Sinusoidal jitter (UI pk-pk)
$f < f2 / 100$	N/A
$f2 / 100 < f \le f2$	$0.05 \times f2 / f + S - 0.05$[a]
$f2 < f < 10 \times LB$[b]	$SJ1 \le S \le SJ2$[a]

[a] S is the magnitude of sine jitter actually used in the calibration of the stressed eye per the methods of 58.7.11.2.
[b] LB = Loop Bandwidth; Upper frequency bound for added sine jitter should be at least 10 times the loop bandwidth of the receiver being tested.

58.7.12 Jitter measurements (informative)

A jitter measurement method for use at 100 or 1000 Mb/s is described in this subclause. The measurement is performed after any relevant fiber dispersion (at virtual TP3). The test pattern is specified in 58.7.1 or 59.7.1 as appropriate.

The transmit jitter is tested using a bit error ratio tester (BERT), where the tester scans the eye opening horizontally (varying the decision time) at the average optical power, at a virtual TP3 (hereafter referred to as simply TP3) and measures the bit error ratio at each point in time. The plot of BER as a function of

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 308 of 717

sampling time is called the "bathtub curve." The channel and receiver are as specified in e.g. 58.7.9.2 and 58.7.9.3. The receiver includes a defined filter function. The test pattern is the same as for receiver sensitivity measurements.

NOTE—The parameter *W* may also be estimated from jitter histograms using an oscilloscope. Jitter of an optical signal is measured with a test optical receiver with the receiver bandwidth specified (e.g. for eye mask conformance) for the transmitter under test concerned.

The experimental curve is compared with a mask defined by the following equations and illustrated in Figure 58–11:

$$\log_{10}(BER) \le A - B\left(\frac{t - 0.5W}{\sigma}\right)^2 \quad (45\text{-}14)$$

$$\log_{10}(BER) \le A - B\left(\frac{1 - t - 0.5W}{\sigma}\right)^2 \quad (45\text{-}15)$$

where:

$$A = -1.75, B = \frac{\log_{10}(e)}{2} \approx 0.217$$

and t is the decision time specified in unit intervals (UI). $t = 0$ at the mean crossing time which may be estimated as the mid-point between the 10^{-3} BER points.

The BER mask is defined for $10^{-12} < \text{BER} < 10^{-6}$. All points on the BER "bathtub curve" must fall within the white area or below. It can be seen that in the case of an asymmetric measured bathtub curve, the worse side determines W and σ.

W ("high probability jitter") and deterministic jitter (DJ) are not necessarily the same, but may be similar. The quantity σ can be similar to random jitter (RJ) although it is determined by low probability pattern dependent jitter also. "Total jitter" (TJ) is taken to be $W + 14\sigma$

.

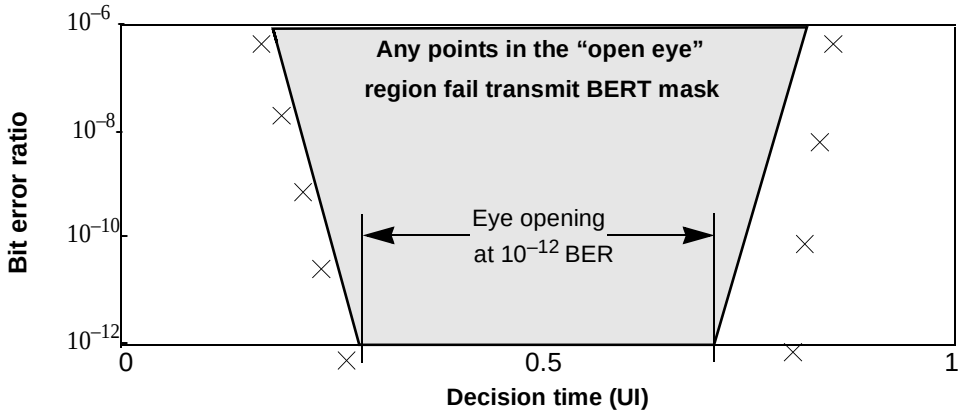


Figure 58–11—Example transmit BER mask at TP3

NOTE—This jitter measurement method applies to Clause 58, Clause 59, and Clause 60.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 309 of 717

58.8 Environmental, safety and labeling

58.8.1 General safety

All equipment meeting this standard shall conform to IEC 60950.

58.8.2 Laser safety

100BASE-LX10 and 100BASE-BX10 optical transceivers shall conform to Class 1 laser requirements as defined in IEC 60825-1, under any condition of operation. This includes single fault conditions whether coupled into a fiber or out of an open bore. Conformance to additional laser safety standards may be required for operation within specific geographical regions.

Laser safety standards and regulations require that the manufacturer of a laser product provide information about the product's laser, safety features, labeling, use, maintenance and service. This documentation shall explicitly define requirements and usage restrictions on the host system necessary to meet these safety certifications.

58.8.3 Installation

It is recommended that proper installation practices, as defined by applicable local codes and regulation, be followed in every instance in which such practices are applicable.

58.8.4 Environment

Two optional temperature ranges are defined in Table 58–14. Implementations shall be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

Table 58–14—Component case temperature classes

Class	Low temperature (°C)	High temperature (°C)
Warm extended	–5	+85
Cool extended	–40	+60
Universal extended	–40	+85

Reference Annex 67A for additional environmental information.

58.8.5 PMD labeling requirements

It is recommended that each PHY (and supporting documentation) be labeled in a manner visible to the user, with at least the applicable safety warnings and the applicable port type designation (e.g., 100BASE-BX10-U).

Labeling requirements for Class 1 lasers are given in the laser safety standards referenced in 58.8.2.

Compliant systems and field pluggable components shall be clearly labeled with the operating temperature range over which their compliance is ensured.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 310 of 717

58.9 Characteristics of the fiber optic cabling

The 100BASE-LX10 and 100BASE-BX10 fiber optic cabling shall meet the dispersion specifications of IEC 60793-2 and ITU-T G.652, as shown in Table 58–15. The fiber cable attenuation is for information only; the end-to-end channel loss shall meet the requirements of Table 58–1. The fiber optic cabling consists of one or more sections of fiber optic cable and any intermediate connections required to connect sections together. The fiber optic cabling spans from one MDI to another MDI, as shown in Figure 58–12.

58.9.1 Fiber optic cabling model

The fiber optic cabling model is shown in Figure 58–12.

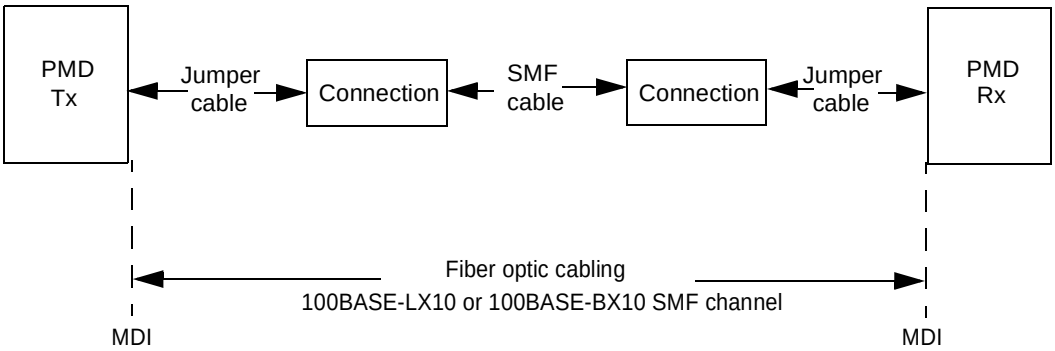


Figure 58–12—Fiber optic cabling model

The maximum channel insertion losses shall meet the requirements specified in Table 58–1. The minimum loss for 100BASE-LX10 and 100BASE-BX10 is zero. A channel may contain additional connectors or other optical elements as long as the optical characteristics of the channel, such as attenuation, dispersion and reflections, meet the specifications. Insertion loss measurements of installed fiber cables are made in accordance with ANSI/TIA/EIA-526-7 [B15], method A-1. The fiber optic cabling model (channel) defined here is the same as a simplex fiber optic link segment. The term channel is used here for consistency with generic cabling standards.

NOTE—In extreme cases with minimum length links (less than 2 m), care may be taken to avoid excess optical power delivered through cladding modes to the receiver.

58.9.2 Optical fiber and cable

The fiber optic cable requirements are satisfied by the fibers specified in IEC 60793-2, Types B1.1 (dispersion un-shifted single-mode) and B1.3 (low water peak single-mode) and ITU-T G.652 as noted in Table 58–15.

Table 58–15—Optical fiber and cable characteristics

Description[a]	B1.1, B1.3 SMF		Unit
Nominal fiber specification wavelength[b]	1310	1550	nm
Fiber cable attenuation (max)[c]	0.4	0.35	dB/km
Zero dispersion wavelength (λ_0)[d]	$1300 \le \lambda_0 \le 1324$		nm
Dispersion slope (max) (S_0)	0.093		ps/nm^2km

[a]The fiber dispersion values are normative, all other values in the table are informative.
[b]Wavelength specified is the nominal fiber specification wavelength which is the typical measurement wavelength. Power penalties at other wavelengths are accounted for.
[c]Attenuation values are informative not normative. Attenuation for single-mode optical fiber cables is defined in ITU-T G.652.
[d]See IEC 60793 or G.652 for correct use of zero dispersion wavelength and dispersion slope.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 311 of 717

58.9.3 Optical fiber connection

The maximum link distances for single-mode fiber are calculated based on an allocation of 2 dB total connection and splice loss. Connections with different loss characteristics may be used provided the requirements of Table 58–1 are met.

The maximum discrete reflectance of e.g. a connection or splice shall be less than –26 dB.

58.9.4 Medium Dependent Interface (MDI)

The 100BASE-LX10, 100BASE-BX10-D or 100BASE-BX10-U PMD is coupled to the fiber optic cabling at the MDI. The MDI is the interface between the PMD and the "fiber optic cabling" (as shown in Figure 58–12). Examples of an MDI include:

a) Connectorized fiber pigtail;
b) PMD receptacle.

The MDI carries the signal in both directions. For 100BASE-BX10 it couples a single fiber and for 100BASE-LX10 it couples dual fibers.

When the MDI is a remateable connection it shall meet the interface performance specifications of IEC 61753-1.

NOTE—Compliance testing is performed at TP2 and TP3 as defined in 58.2.1, not at the MDI.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 312 of 717

58.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 58, Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 (Long Wavelength) and 100BASE-BX10 (BiDirectional Long Wavelength)[7]

58.10.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 58, Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 and 100BASE-BX10, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

58.10.2 Identification

58.10.2.1 Implementation identification

Supplier[1]	
Contact point for enquiries about the PICS[1]	
Implementation Name(s) and Version(s)[1,3]	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Name(s)[2]	
NOTES 1—Required for all implementations. 2—May be completed as appropriate in meeting the requirements for the identification. 3—The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

58.10.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Clause 58, Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 and 100BASE-BX10
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	

Date of Statement	

[7]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 313 of 717

58.10.2.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
HT	High temperature operation	58.8.4	–5 to 85 °C	O	Yes [ ] No [ ]
LT	Low temperature operation	58.8.4	–40 to 60 °C	O	Yes [ ] No [ ]
*LX	100BASE-LX10 PMD	58.3	Device supports long wavelength (1310 nm) over dual single-mode fiber operation	O/1	Yes [ ] No [ ]
*BD	100BASE-BX10-D	58.4	Device operates with one single single-mode fiber and transmits at downstream wavelength (1550 nm)	O/1	Yes [ ] No [ ]
*BU	100BASE-BX10-U	58.4	Device operates with one single single-mode fiber and transmits at upstream wavelength (1310 nm)	O/1	Yes [ ] No [ ]
*INS	Installation / Cable	58.9	Items marked with INS include installation practices and cable specifications not applicable to a PHY manufacturer	O	Yes [ ] No [ ]

58.10.3 PICS proforma tables for Physical Medium Dependent (PMD) sublayer and medium, type 100BASE-LX10 and 100BASE-BX10

58.10.3.1 PMD functional specifications

Item	Feature	Subclause	Value/Comment	Status	Support
FN1	Transmit function	58.2.2	Conveys bits from PMD service interface to MDI	M	Yes [ ]
FN2	Transmitter optical signal	58.2.2	Higher optical power transmitted is a logic 1	O	Yes [ ] No [ ]
FN3	Receive function	58.2.3	Conveys bits from MDI to PMD service interface	M	Yes [ ]
FN4	Receiver optical signal	58.2.3	Higher optical power received is a logic 1	O	Yes [ ] No [ ]
FN5	Signal detect function	58.2.4	Mapping to PMD service interface	M	Yes [ ]
FN6	Signal detect behaviour	58.2.4	Generated according to Table 58–2	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 314 of 717

58.10.3.2 PMD to MDI optical specifications for 100BASE-LX10

Item	Feature	Subclause	Value/Comment	Status	Support
LX1	100BASE-LX10 transmitter	58.3.1	Meets specifications in Table 58–3	LX:M	Yes [ ] N/A [ ]
LX2	100BASE-LX10 receiver	58.3.2	Meets specifications in Table 58–4	LX:M	Yes [ ] N/A [ ]
LX3	100BASE-LX10 stressed receiver sensitivity	58.3.2	Meets specification in Table 58–4	LX:O	Yes [ ] No [ ] N/A [ ]

58.10.3.3 PMD to MDI optical specifications for 100BASE-BX10-D

Item	Feature	Subclause	Value/Comment	Status	Support
BD1	100BASE-BX10 transmitter	58.4.1	Meets specifications in Table 58–5	BD:M	Yes [ ] N/A [ ]
BD2	100BASE-BX10 receiver	58.4.2	Meets specifications in Table 58–6	BD:M	Yes [ ] N/A [ ]
BD3	100BASE-BX10 stressed receiver sensitivity	58.4.2	Meets specification in Table 58–6	BD:O	Yes [ ] No [ ] N/A [ ]

58.10.3.4 PMD to MDI optical specifications for 100BASE-BX10-U

Item	Feature	Subclause	Value/Comment	Status	Support
BU1	100BASE-BX10 transmitter	58.4.1	Meets specifications in Table 58–5	BU:M	Yes [ ] N/A [ ]
BU2	100BASE-BX10 receiver	58.4.2	Meets specifications in Table 58–6	BU:M	Yes [ ] N/A [ ]
BU3	100BASE-BX10 stressed receiver sensitivity	58.4.2	Meets specification in Table 58–6	BU:O	Yes [ ] No [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 315 of 717

58.10.3.5 Optical measurement requirements

Item	Feature	Subclause	Value/Comment	Status	Support
OM1	Measurement cable	58.7	2 to 5 meters in length	M	Yes [ ]
OM2	Test pattern	58.7.1, 58.7.8, 58.7.10	For eye, sensitivity, TDP, stressed sensitivity, jitter	M	Yes [ ]
OM3	Wavelength and spectral width	58.7.2	Per TIA/EIA-455-127 under modulated conditions	M	Yes [ ]
OM4	Average optical power	58.7.3	Per TIA/EIA-455-95	M	Yes [ ]
OM5	Extinction ratio	58.7.4	Per ANSI/TIA/EIA-526-4A	M	Yes [ ]
OM6	Transmit eye	58.7.8	Per ANSI/TIA/EIA-526-4A with test pattern and fourth-order Bessel-Thomson receiver	M	Yes [ ]
OM7	Receiver sensitivity	58.7.10	With specified pattern	M	Yes [ ]
OM8	Transmitter and dispersion penalty	58.7.9	With dispersion, reflection and decision timing offsets	M	Yes [ ]
OM9	Stressed receiver conformance test	58.7.11	According to 58.7.11.1, 58.7.11.2, and 58.7.11.3	O	Yes [ ] No [ ]

58.10.3.6 Environmental specifications

Item	Feature	Subclause	Value/Comment	Status	Support
ES1	General safety	58.8.1	Conforms to IEC-60950	M	Yes [ ]
ES2	Laser safety —IEC Class 1	58.8.2	Conform to Class 1 laser requirements defined in IEC 60825-1	M	Yes [ ]
ES3	Documentation	58.8.2	Explicitly defines requirements and usage restrictions to meet safety certifications	M	Yes [ ]
ES4	Operating temperature range labelling	58.8.5	If required	M	Yes [ ] N/A [ ]

58.10.3.7 Characteristics of the fiber optic cabling and MDI

Item	Feature	Subclause	Value/Comment	Status	Support
FO1	Fiber optic cabling	58.9	Dispersion specifications of Table 58–15	INS:M	Yes [ ] N/A [ ]
FO2	End-to-end channel loss	58.1, 58.9	Meet the requirements of Table 58–1	INS:M	Yes [ ] N/A [ ]
FO3	Maximum discrete reflectance	58.9.3	Less than –26 dB	INS:M	Yes [ ] N/A [ ]
FO4	MDI requirements	58.9.4	IEC 61753-1 if rematable	INS:O	Yes [ ] No [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 316 of 717

59. Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 (Long Wavelength) and 1000BASE-BX10 (BiDirectional Long Wavelength)

59.1 Overview

The 1000BASE-LX10 and 1000BASE-BX10 PMD sublayers provide point-to-point (P2P) 1000BASE-X links over a pair of fibers or a single fiber, respectively, up to 10 km.

This clause specifies the 1000BASE-LX10 PMD for both single-mode and multimode fiber, and the 1000BASE-BX10 PMD for single-mode fiber. A PMD is connected to the 1000BASE-X PMA of 66.2, and to the medium through the MDI. A PMD is optionally combined with the management functions that may be accessible through the management interface defined in Clause 22 or by other means.

Table 59–1 shows the primary attributes of each PMD type.

Table 59–1—Classification of 1000BASE-LX10 and 1000BASE-BX10 PMDs

Description	1000BASE-LX10		1000BASE-BX10-D	1000BASE-BX10-U	Unit
Fiber type[a]	B1.1, B1.3 SMF	50, 62.5 μm MMF	B1.1, B1.3 SMF		
Number of fibers	2	2	1		
Typical transmit direction	N/A		Downstream	Upstream	
Nominal transmit wavelength	1310	1310	1490	1310	nm
Minimum range	0.5 m to 10 km	0.5 m to 550 m[b]	0.5 m to 10 km		
Maximum channel insertion loss[c]	6.0	2.4	5.5	6.0	dB

[a]per IEC 60793-2
[b]see Table 59–16 for fiber and cable characteristics
[c]at the nominal operating wavelength

A 1000BASE-LX10 link uses 1000BASE-LX10 PMDs at each end while a 1000BASE-BX10 link uses a 1000BASE-BX10-D PMD at one end and a 1000BASE-BX10-U PMD at the other. Typically the 1490 nm band is used to transmit away from the center of the network (“downstream”) and the 1310 nm band towards the center (“upstream”), although this arrangement, or the notion of hierarchy, is not required. The suffixes “D” and “U” indicate the PMDs at each end of a link which transmit in these directions and receive in the opposite directions.

1000BASE-LX10 is interoperable with 1000BASE-LX (see Clause 38). If used on single mode fiber, operation is not ensured by this standard beyond the reach given in Table 38-6.

Two optional temperature ranges are defined; see 59.8.4 for further details. Implementations may be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 317 of 717

59.1.1 Goals and objectives

The following are the objectives of 1000BASE-LX10 and 1000BASE-BX10:

a) Point to point on optical fiber

b) 1000BASE-LX extended temperature range optics

c) 1000BASE-X up to 10km over SM fiber

d) BER better than or equal to 10^{-12} at the PHY service interface

59.1.2 Positioning of 1000BASE-LX10 and 1000BASE-BX10 PMDs within the IEEE 802.3 architecture

Figure 59–1 depicts the relationships of the PMD (shown shaded) with other sublayers and the ISO/IEC Open System Interconnection (OSI) reference model.

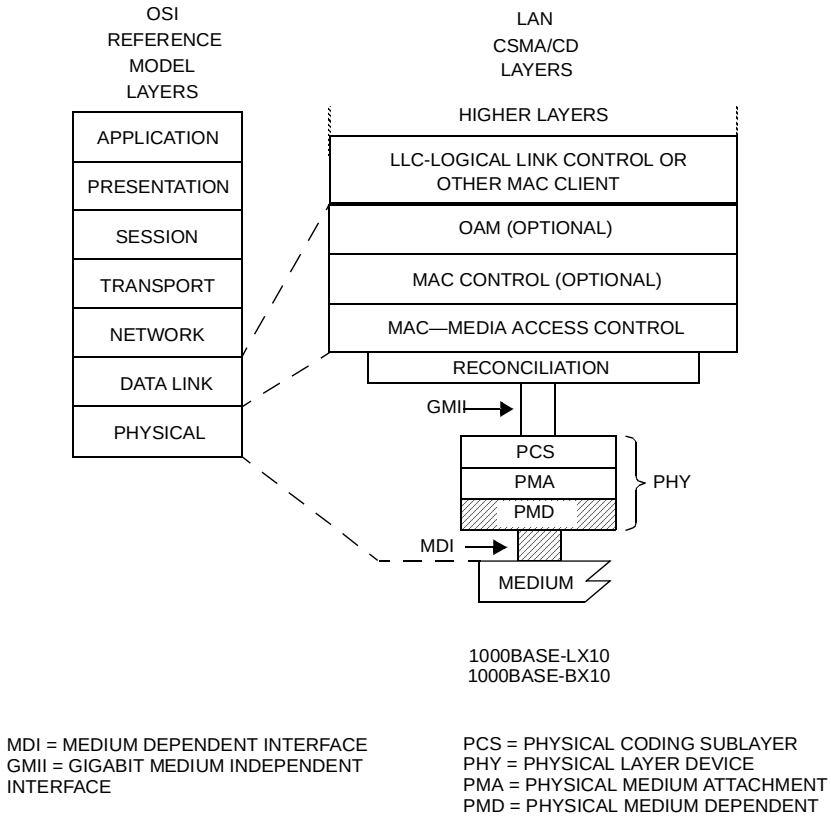


Figure 59–1—1000BASE-LX10 and 1000BASE-BX10 PMDs relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model and the IEEE 802.3 CSMA/CD LAN model

59.1.3 Terminology and conventions

The following list contains references to terminology and conventions used in this clause:

Basic terminology and conventions, see 1.1 and 1.2.

Normative references, see 1.3.

Definitions, see 1.4.

Abbreviations, see 1.5.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 318 of 717

Informative references, see Annex A.

Introduction to 1000 Mb/s baseband networks, see Clause 34.

Introduction to Ethernet for subscriber access networks, see Clause 56.

59.1.4 Physical Medium Dependent (PMD) sublayer service interface

The following specifies the services provided by the 1000BASE-LX10 and 1000BASE-BX10 PMDs. These PMD sublayers are described in an abstract manner and do not imply any particular implementation. The PMD service interface supports the exchange of encoded 8B/10B code-groups between the PMA and PMD entities. The PMD translates the serialized data of the PMA to and from signals suitable for the specified medium.

The following primitives are defined

PMD_UNITDATA.request

PMD_UNITDATA.indicate

PMD_SIGNAL.indicate

59.1.5 Delay constraints

Delay requirements from the MDI to the GMII which include the PMD layer are specified in clause 36. Of the budget, up to 20 ns is reserved for each of the transmit and receive functions of the PMD to account for those cases where the PMD includes a pigtail.

59.1.5.1 PMD_UNITDATA.request

This primitive defines the transfer of a serial data stream from the PMA to the PMD.

The semantics of the service primitive are PMD_UNITDATA.request(tx_bit). The data conveyed by PMD_UNITDATA.request is a continuous stream of bits where the tx_bit parameter can take one of two values: ONE or ZERO. The PMA continuously sends the appropriate stream of bits to the PMD for transmission on the medium, at a nominal 1.25 GBd signaling speed. Upon receipt of this primitive, the PMD converts the specified stream of bits into the appropriate signals at the MDI.

59.1.5.2 PMD_UNITDATA.indicate

This primitive defines the transfer of data from the PMD to the PMA.

The semantics of the service primitive are PMD_UNITDATA.indicate(rx_bit). The data conveyed by PMD_UNITDATA.indicate is a continuous stream of bits where the rx_bit parameter can take one of two values: ONE or ZERO. The PMD continuously sends a stream of bits to the PMA corresponding to the signals received from the MDI.

59.1.5.3 PMD_SIGNAL.indicate

This primitive is generated by the PMD to indicate the status of the signal being received from the MDI.

The semantics of the service primitive are PMD_SIGNAL.indicate(SIGNAL_DETECT). The SIGNAL_DETECT parameter can take on one of two values: OK or FAIL, indicating whether the PMD is detecting light at the receiver (OK) or not (FAIL). When SIGNAL_DETECT = FAIL, PMD_UNITDATA.indicate(rx_bit) is undefined. The PMD generates this primitive to indicate a change in the value of SIGNAL_DETECT.

SIGNAL_DETECT = OK does not guarantee that PMD_UNITDATA.indicate(rx_bit) is known good. It is possible for a poor quality link to provide sufficient light for a SIGNAL_DETECT = OK indication and still not meet the specified bit error ratio.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 319 of 717

59.2 PMD functional specifications

The 1000BASE-X PMDs perform the transmit and receive functions that convey data between the PMD service interface and the MDI.

59.2.1 PMD block diagram

The PMD sublayer is defined at the four reference points shown in Figure 59–2. Two points, TP2 and TP3, are compliance points. TP1 and TP4 are reference points for use by implementers. The optical transmit signal is defined at the output end of a patch cord (TP2), between 2 and 5 m in length, of a fiber type consistent with the link type connected to the transmitter. If a single-mode fiber offset-launch mode-conditioning patch cord is used, the optical transmit signal is defined at the end of this single-mode fiber offset-launch mode-conditioning patch cord at TP2. Unless specified otherwise, all transmitter measurements and tests defined in 59.7 are made at TP2. The optical receive signal is defined at the output of the fiber optic cabling (TP3) connected to the receiver. Unless specified otherwise, all receiver measurements and tests defined in 59.7 are made at TP3.

The electrical specifications of the PMD service interface (TP1 and TP4) are not system compliance points (these are not readily testable in a system implementation). It is expected that in many implementations, TP1 and TP4 will be common between 1000BASE-X PMD types.

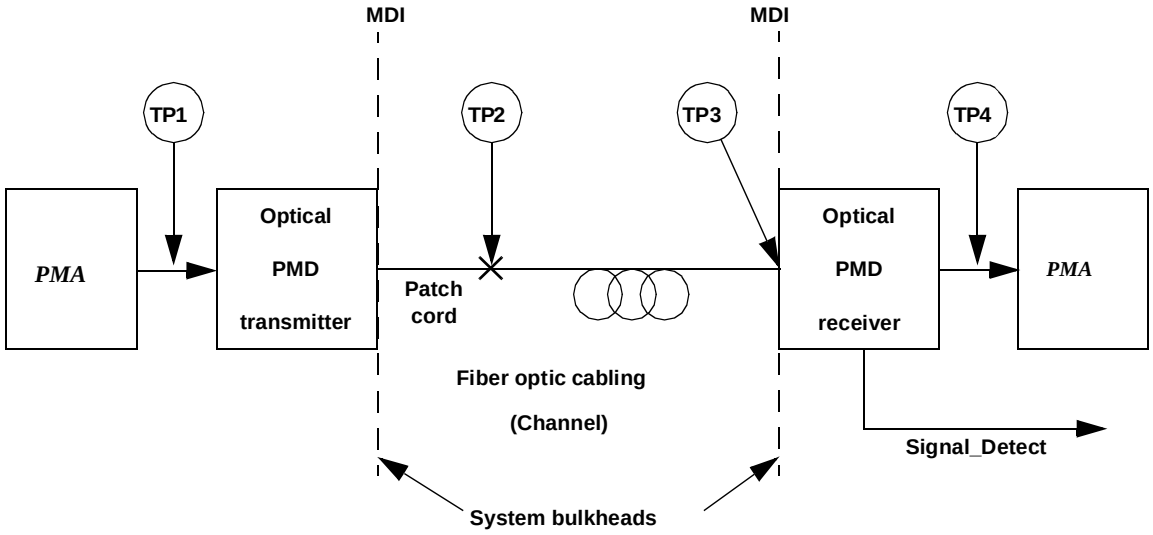


Figure 59–2—1000BASE-X block diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 320 of 717

59.2.2 PMD transmit function

The PMD Transmit function shall convey the bits requested by the PMD service interface message PMD_UNITDATA.request(tx_bit) to the MDI according to the optical specifications in this clause. The higher optical power level shall correspond to tx_bit =ONE.

59.2.3 PMD receive function

The PMD receive function shall convey the bits received from the MDI according to the optical specifications in this clause to the PMD service interface using the message PMD_UNITDATA.indicate(rx_bit). The higher optical power level shall correspond to rx_bit =ONE.

59.2.4 PMD signal detect function

The PMD signal detect function shall report to the PMD service interface using the message PMD_SIGNAL.indicate(SIGNAL DETECT) which is signaled continuously. PMD_SIGNAL.indicate is intended to be an indicator of optical signal presence.

The value of the SIGNAL_DETECT parameter shall be generated according to the conditions defined in Table 59–2. The PMD receiver is not required to verify whether a compliant 1000BASE-X signal is being received. This standard imposes no response time requirements on the generation of the SIGNAL_DETECT parameter.

As an unavoidable consequence of the requirements for the setting of the SIGNAL_DETECT parameter, implementations must provide adequate margin between the input optical power level at which the SIGNAL_DETECT parameter is set to OK, and the inherent noise level of the PMD due to cross talk, power supply noise, etc.

Various implementations of the Signal Detect function are permitted by this standard, including implementations which generate the SIGNAL_DETECT parameter values in response to the amplitude of the 8B/10B modulation of the optical signal and implementations which respond to the average optical power of the 8B/10B modulated optical signal.

Table 59–2—1000BASE-LX10 and 1000BASE-BX10 SIGNAL_DETECT value definition

Receive conditions		Signal_detect value
1000BASE-LX10	**1000BASE-BX10**	
Average input optical power ≤ signal detect threshold (min) in Table 59–5	Average input optical power ≤ signal detect threshold (min) in Table 59–7	FAIL
Average input optical power ≥ receiver sensitivity (max) in Table 59–5 with a compliant 1000BASE-LX or 1000BASE-LX10 signal input	Average input optical power ≥ receiver sensitivity (max) in Table 59–7 with a compliant 1000BASE-BX10 signal input at the specified receiver wavelength	OK
All other conditions		Unspecified

59.3 PMD to MDI optical specifications for 1000BASE-LX10

The operating range for 1000BASE-LX10 is defined in Table 59–1. A 1000BASE-LX10 compliant transceiver operates over the media types listed in Table 59–1 according to the specifications described in 59.9. A transceiver which exceeds the operational range requirement while meeting all other optical specifications is considered compliant

NOTE—In this subclause and Table 59–5, the specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is explained in 58.7.6.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 321 of 717

59.3.1 Transmitter optical specifications

The 1000BASE-LX10 transmitter's signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 59–3 per measurement techniques described in 59.7. Its $RIN_{12}OMA$ should meet the value listed in Table 59–3 per measurement techniques described in 58.7.7. To ensure that the specifications of Table 59–3 are met with MMF links, the 1000BASE-LX10 transmitter output shall be coupled through a single-mode fiber offset-launch mode-conditioning patch cord, as defined in 59.9.5.The maximum RMS spectral width vs. center wavelength for 1000BASE-LX10 is shown in Table 59–4 and Figure 59–3. The equation used to generate these values is included in 59.7.2. The values in bold are normative, the others informative.

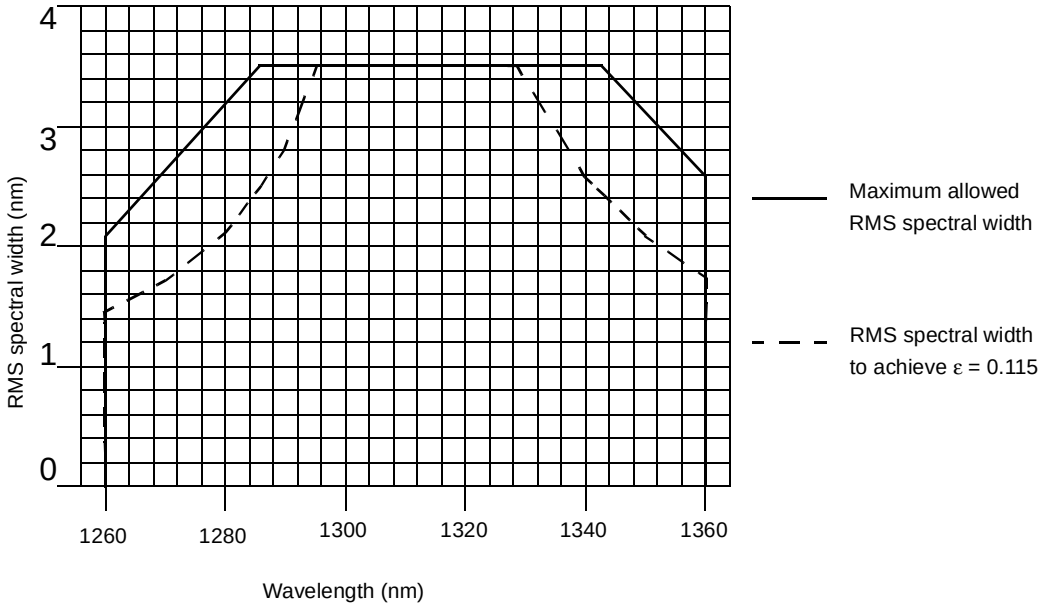


Figure 59–3—1000BASE-LX-10 Transmitter spectral limits

Table 59–3—1000BASE-LX10 transmit characteristics

Description	SMF	50 µm MMF	62.5 µm MMF	Unit
Nominal transmitter type[a]	Longwave Laser			
Signaling speed (range)	1.25 ± 100 ppm			GBd
Operating wavelength range[b]	1260 to 1360			nm
T rise /T fall (max, 20–80% response time)	0.30			ns
RMS spectral width (max)	See Table 59–4			nm
Average launch power (max)	–3			dBm
Average launch power (min)	–9	–11.0	–11.0	dBm
Average launch power of OFF transmitter (max)	–45			dBm
Extinction ratio (min)	6			dB
$RIN_{12}OMA$ (max)	–113			dB/Hz
Optical return loss tolerance (max)	12			dB
Launch OMA (min)	–8.7 (130)	–10.2 (100)	–10.2 (100)	dBm (µW)
Transmitter eye mask definition {X1, X2, Y1, Y2, Y3}	0.22, 0.375, 0.20, 0.20, 0.30			UI

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 322 of 717

Table 59–3—1000BASE-LX10 transmit characteristics *(continued)*

Description	SMF	50 µm MMF	62.5 µm MMF	Unit
Decision timing offsets for transmitter and dispersion penalty (min)	±80			ps
Transmitter reflectance (max)	–6			dB
Transmitter and dispersion penalty, TDP (max)	3.3	3.5		dB
Differential delay, reference receiver for TDP (min)[c]	NA	367		ps

[a]The nominal device type is not intended to be a requirement on the source type, and any device meeting the transmitter characteristics specified may be substituted for the nominal device type.
[b]The great majority of the transmitted spectrum must fall within the operating wavelength range. The allowable range of central wavelengths is narrower than the operating wavelength range by the actual RMS spectral width at each extreme.
[c]Delay is calculated as Td=L/(3.BWf) where BWf is defined to –3 dB (optical). 1000BASE-LX is rated for 550 m of 500 MHz.km fiber while 1000BASE-LX also covered 550 m of 400 MHz.km fiber, but this is now seen as a historical bandwidth requirement.

Table 59–4—1000BASE-LX10 and 1000BASE-BX10 transmitter spectral limits

Center wavelength	RMS spectral width (max)[a]	RMS spectral width to achieve ε ≤0.115 (informative)
nm	**nm**	**nm**
1260	**2.09**	1.43
1270	**2.52**	1.72
1280	**3.13**	2.14
1286	**3.50**	2.49
1290		2.80
1297		3.50
1329		
1340		2.59
1343		2.41
1350	**3.06**	2.09
1360	**2.58**	1.76
1480 to 1500	**0.88**	0.60

[a]These limits for the 1000BASE-LX10 transmitter are illustrated in Figure 59–3. Limits at intermediate wavelengths may be found by interpolation.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 323 of 717

59.3.2 Receiver optical specifications

The 1000BASE-LX10 receiver's signaling speed, operating wavelength, damage, overload, sensitivity, stressed receive characteristics, reflectivity and signal detect shall meet the specifications defined in Table 59–5 per measurement techniques defined in 59.7.

Table 59–5—1000BASE-LX10 receive characteristics

Description	Value	Unit
Signaling speed (range)	1.25 ± 100 ppm	GBd
Wavelength (range)	1260 to 1360	nm
Average receive power (max)	–3	dBm
Receive sensitivity (max)	–19.5	dBm
Receiver sensitivity as OMA (max)	–18.7 (13.4)	dBm (μW)
Bit error ratio (max)	10^{-12}	
Receiver reflectance (max)[a]	–12	dB
Stressed receive sensitivity (max)	–15.4	dBm
Stressed receiver sensitivity as OMA (max)	–14.6 (35)	dBm (μW)
Vertical eye-closure penalty (min)	3.6	dB
Receive electrical 3 dB upper cutoff frequency (max)	1500	MHz
Signal detect threshold (min)	–45	dBm
Stressed eye jitter (min)[b]	0.3	UI pk-pk
Jitter corner frequency	637	kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15	UI

[a]See 1.4 for definition of reflectance.
[b]Vertical eye closure penalty and jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.

59.4 PMD to MDI optical specifications for 1000BASE-BX10-D and 1000BASE-BX10-U

The operating range for 1000BASE-BX10-D and 1000BASE-BX10-U is defined in Table 59–1. A 1000BASE-BX10 compliant transceiver operates over all single-mode fibers listed in Table 59–1. A transceiver which exceeds the operational range requirement while meeting all other optical specifications is considered compliant.

NOTE—In this subclause and 59.3, the specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is explained in 58.7.6.

59.4.1 Transmit optical specifications

The 1000BASE-BX10-D and 1000BASE-BX10-U transmitter's signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 59–6 per measurement techniques described in 59.7. Its $RIN_{12}OMA$ should meet the value listed in Table 59–6 per measurement techniques described in 59.7.7.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 324 of 717

Table 59–6—1000BASE-BX10-D and 1000BASE-BX10-U transmit characteristics

Description	1000BASE-BX10-D	1000BASE-BX10-U	Unit
Nominal transmitter type[a]	Longwave Laser		
Signaling speed (range)	1.25 ± 100 ppm		GBd
Operating wavelength range[b]	1480 to 1500	1260 to 1360	nm
RMS spectral width (max)	See Table 59–4		nm
Average launch power (max)	-3		dBm
Average launch power (min)	–9		dBm
Average launch power of OFF transmitter (max)	–45		dBm
Extinction ratio (min)	6		dB
$RIN_{12}OMA$ (max)	–113		dB/Hz
Optical return loss tolerance (max)	12		dB
Launch OMA	–8.2 (151)		dBm (μW)
Transmitter eye mask definition {X1, X2, Y1, Y2, Y3}	0.22, 0.375, 0.20, 0.20, 0.30		UI
Transmitter reflectance (max)	–10	–6	dB
Transmitter and dispersion penalty, TDP (max)	3.3		dB
Decision timing offsets for transmitter and dispersion penalty (min)	± 80		ps

[a]The nominal device type is not intended to be a requirement on the source type, and any device meeting the transmitter characteristics specified may be substituted for the nominal device type.
[b]The great majority of the transmitted spectrum must fall within the operating wavelength range. The allowable range of central wavelengths is narrower than the operating wavelength range by the actual RMS spectral width at each extreme.

59.4.2 Receiver optical specifications

The 1000BASE-BX10-D and 1000BASE-BX10-U receiver's signaling speed, operating wavelength, damage, overload, sensitivity, reflectivity and signal detect shall meet the specifications defined in Table 59–7 per measurement techniques defined in 59.7. Its stressed receive characteristics should meet the values listed in Table 59–7 per measurement techniques described in 59.7.11.

Table 59–7—1000BASE-BX10-D and 1000BASE-BX10-U receive characteristics

Description	1000BASE-BX10-D	1000BASE-BX10-U	Unit
Signaling speed (range)	1.25 ± 100 ppm		GBd
Wavelength (range)	1260 to 1360	1480 to 1500	nm
Bit error ratio (max)	10^{-12}		
Average receive power (max)	–3		dBm
Receive sensitivity (max)	–19.5		dBm

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 325 of 717

Table 59–7—1000BASE-BX10-D and 1000BASE-BX10-U receive characteristics *(continued)*

Description	1000BASE-BX10-D	1000BASE-BX10-U	Unit
Receiver sensitivity as OMA (max)	–18.7 (13.4)		dBm (µW)
Receiver reflectance (max)	–12		dB
Stressed receive sensitivity (max)[a]	–15.4		dBm
Stressed receiver sensitivity as OMA (max)	–14.6 (35)		dBm (µW)
Vertical eye-closure penalty (min)[b]	2.6		dB
Receive electrical 3 dB upper cutoff frequency (max)	1500		MHz
Signal detect threshold (min)	–45		dBm
Stressed eye jitter (min)	0.3		UI pk-pk
Jitter corner frequency	637		kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15		UI

[a]The stressed receiver sensitivity is optional
[b]Vertical eye closure penalty and jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.

59.5 Illustrative 1000BASE-LX10 and 1000BASE-BX10 channels and penalties (informative)

The illustrative channel and penalties for 1000BASE-LX10 and 1000BASE-BX10 PMDs are shown in Table 59–8.

Table 59–8—Illustrative 1000BASE-LX10 and 1000BASE-BX10 channel and penalties

PMD type	1000BASE-LX10		1000BASE-BX10-D	1000BASE-BX10-U	Unit
Fiber type	B1.1, B1.3 SMF	50µm, 62.5µm MMF	B1.1, B1.3 SMF		
Measurement wavelength for fiber	1310	1300	1550	1310	nm
Nominal distance	10	0.55	10		km
Available power budget	10.5	8.5	10.5		dB
Maximum channel insertion loss[a]	6.0	2.4	5.5	6.0	dB
Allocation for penalties[b]	4.5	6.1	5.0	4.5	dB

[a]The maximum channel insertion loss is based on the cable attenuation at the target distance and nominal measurement wavelength. The channel insertion loss also includes the loss for connectors, splices and other passive components.
[b]The allocation for penalties is the difference between the available power budget and the channel insertion loss; insertion loss difference between nominal and worse case operating wavelength is considered a penalty.

NOTE—The budgets include an allowance for –12 dB reflection at the receiver.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 326 of 717

59.6 Jitter specifications

The entries for the 1000BASE-LX10 jitter budget on MMF in Table 59–9 and the 1000BASE-LX10 and 1000BASE-BX10 jitter budget on SMF in Table 59–10 represent high-frequency jitter (above 637 kHz) and do not include low frequency jitter or wander. All values are informative.

Table 59–9—1000BASE-LX10 jitter budget on MMF (informative)

	Total jitter		*W*	
Reference Point	**UI**	**ps**	**UI**	**ps**
TP1	0.240	192	0.100	80
TP1 to TP2	0.284	227	0.100	80
TP2	0.431	345	0.200	160
TP2 to TP3	0.170	136	0.050	40
TP3	0.510	408	0.250	200
TP3 to TP4	0.332	266	0.212	170
TP4	0.749	599	0.462	370

W is similar but not necessarily identical to deterministic jitter (DJ). A jitter measurement procedure is described in 58.7.12. Other jitter measurements are described in 59.7.12 and 59.7.13. Jitter at TP2 or TP3 is defined with a receiver of the same bandwidth as specified for the transmitted eye.

Table 59–10—1000BASE-LX10 and 1000BASE-BX10 jitter budget on SMF (informative)

	Total jitter		*W*	
Reference point	**UI**	**ps**	**UI**	**ps**
TP1	0.240	192	0.100	80
TP1 to TP2	0.334	267	0.150	120
TP2	0.481	385	0.250	200
TP2 to TP3	0.119	95	0	0
TP3	0.510	408	0.250	200
TP3 to TP4	0.332	266	0.212	170
TP4	0.749	599	0.462	370

NOTE—Informative jitter values are chosen to be compatible with the limits for eye mask and TDP (see 58.7.9). A margin between the total jitter at TP4 and the eye opening imposed by the decision point offsets for TDP is intended to allow for the performance of test equipment used for TDP measurement, to avoid very involved jitter calibrations.

Total jitter in this table is defined at 10^{-12} BER. In a commonly used model,

$$TJ = 14.1\sigma + DJ \text{ at } 10^{12} \quad (45\text{-}1)$$

59.7 Optical measurement requirements

All optical measurements, except TDP and RIN, shall be made through a short patch cable, between 2 and 5 m in length.

The following sections describe definitive patterns and test procedures for certain PMDs of this standard. Implementers using alternative verification methods must ensure adequate correlation and allow adequate margin such that specifications are met by reference to the definitive methods.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 327 of 717

59.7.1 Test patterns

The frame based test patterns defined here are suitable for testing all Clause 59 and Clause 60 PMDs. Further information on frame based testing in included in Annex 58A. The test suite and the patterns are shown in Table 59–11.

Table 59–11—List of test patterns and tests

Test pattern	Tests	Related subclauses
Any valid 8B/10B encoded signal	Eye mask Optical power Central wavelength Spectral width	59.7.8 59.7.3 59.7.2 59.7.2
Idles	Extinction ratio $RIN_{12}OMA$ OMA	59.7.4 59.7.7
Random pattern test frame	Receiver sensitivity Stressed receiver sensitivity Receiver 3dB upper cutoff frequency TDP	59.7.11 59.7.14 59.7.15 59.7.10
Jitter pattern test frame	All jitter tests	59.7.12

The following test patterns are intended for frame based testing of the 1000BASE-X PMDs of Clause 59 and Clause 60. They are compliant Ethernet packets with adequate user defined fields to allow them to be routed through a system to the point of the test. The common portions of the frames are given in Table 59–12.

Table 59–12—Common portion of frame based test pattern

Field	Number of Octets	Hexadecimal	8B10B Encoded binary[a]	
			Starting Disparity +	Starting Disparity–
SPD (/S/)	1	N/A[b]	N/A[c]	110110 1000
Remainder of preamble	6	55	N/A[c]	101010 0101
SFD	1	D5	N/A[c]	101010 0110
Destination address	6	User defined	User defined	User defined
Source address	6	User defined	User defined	User defined
Length / type	2	User defined	User defined	User defined
First portion of MAC client data	32	User defined	User defined	User defined
Second portion of MAC client data	456	See Table 59–13 or Table 59–14	See Table 59–13 or Table 59–14	See Table 59–13 or Table 59–14
Frame check sequence[d]	4	As required by frame	As required by frame	As required by frame
EPD (/T/R/)[e]	2	N/A[b]	010001 0111 000101 0111	101110 1000 111010 1000
Idle (/I1/ or /I2/)[e]	2	N/A[b]	110000 0101 101001 0110	001111 1010 100100 0101
Idle (/I2/)[e]	10	N/A[b]	N/A[f]	001111 1010 100100 0101

[a]The binary bits are transmitted left most bit first.
[b]The SPD, EPD, and Idle code-groups are generated by the PCS and their hexadecimal octet values have no meaning without relation to the signals transmitted across the GMII.
[c]Except when operating in a half-duplex mode, it is not possible to transmit an SPD with a positive starting disparity. The first code-group that could begin with a positive running disparity would be the second octet of the destination address.
[d]The frame check sequence may be calculated using the method described in 3.2.8.
[e]The first row precedes the second row.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 328 of 717

[f]The first idle code-group following the frame will be an /I1/ if the running disparity is positive and an /I2/ if the running disparity is negative. All subsequent idle code-groups will be /I2/.

NOTE—Users are advised to take care that the system under test is not connected to a network in service.

Two payloads are defined. The first, which emulates a random pattern with broad spectral content and minimal peaking, is shown in Table 59–13.T

Table 59–13—Payload for Random Pattern Test Frame

Number of Octets	Hexadecimal	8B10B Encoded Binary	
		Starting Disparity +	Starting Disparity –
Repeat 19 times for 228 bytes	BE	100001 1010	011110 1010
	D7	111010 0110	000101 0110
	23	110001 1001	110001 1001
	47	000111 0101	111000 0101
	6B	110100 0011	110100 1100
	8F	101000 1101	010111 0010
	B3	110010 1010	110010 1010
	14	001011 0100	001011 1011
	5E	011110 0101	100001 0101
	FB	001001 1110	110110 0001
	35	101010 1001	101010 1001
	59	100110 0101	100110 0101
Transmit once for 12 bytes	BC	001110 1010	001110 1010
	D7	000101 0110	111010 0110
	23	110001 1001	110001 1001
	47	111000 0101	000111 0101
	6B	110100 1100	110100 0011
	8F	010111 0010	101000 1101
	B3	110010 1010	110010 1010
	14	001011 1011	001011 0100
	5E	100001 0101	011110 0101
	FB	110110 0001	001001 1110
	35	101010 1001	101010 1001
	59	100110 0101	100110 0101
Repeat 18 times for 216 bytes	BE	011110 1010	100001 1010
	D7	000101 0110	111010 0110
	23	110001 1001	110001 1001
	47	111000 0101	000111 0101
	6B	110100 1100	110100 0011
	8F	010111 0010	101000 1101
	B3	110010 1010	110010 1010
	14	001011 1011	001011 0100
	5E	100001 0101	011110 0101
	FB	110110 0001	001001 1110
	35	101010 1001	101010 1001
	59	100110 0101	100110 0101

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 329 of 717

The payload for the second pattern is shown in Table 59–14.

Table 59–14—Payload for jitter test frame

Field	Hexadecimal	8B10B Encoded Binary	
		Starting Disparity +	Starting Disparity –
Low Transition Density, Repeat 96 times for 192 bytes	7E	100001 1100	011110 0011
	7E	011110 0011	100001 1100
Phase Jump, Repeat one time for 8 bytes	F4	001011 0001	001011 0111
	EB	110100 1110	110100 1000
	F4	001011 0001	001011 0111
	EB	110100 1110	110100 1000
	F4	001011 0001	001011 0111
	EB	110100 1110	110100 1000
	F4	001011 0001	001011 0111
	AB	110100 1010	110100 1010
High Transition Density, Repeat 20 times for 20 bytes	B5	101010 1010	101010 1010
Phase Jump, Repeat 4 times for 8 bytes	EB	110100 1110	110100 1000
	F4	001011 0001	001011 0111
Low Transition Density, Repeat 96 times for 192 bytes	7E	011110 0011	100001 1100
	7E	100001 1100	011110 0011
Phase Jump, Repeat one time for 9 bytes	F4	001011 0111	001011 0001
	EB	110100 1000	110100 1110
	F4	001011 0111	001011 0001
	EB	110100 1000	110100 1110
	F4	001011 0111	001011 0001
	EB	110100 1000	110100 1110
	F4	001011 0111	001011 0001
	AB	110100 1010	110100 1010
High Transition Density, Repeat 20 times for 20 bytes	B5	101010 1010	101010 1010
Phase Jump, Repeat 4 times for 8 bytes.	EB	110100 1000	110100 1110
	F4	001011 0111	001011 0001

This pattern has areas of high and low transition density to aggravate jitter susceptibility.

Frames are separated by a near minimum inter-packet gap (IPG) of 14 octets.

Copyright © 2004 IEEE. All rights reserved.

59.7.2 Wavelength and spectral width measurements

The wavelength and spectral width (RMS) shall meet the specifications according to ANSI/EIA/TIA-455-127, under modulated conditions using a valid 1000BASE-X signal.

NOTES

1—The great majority of the transmitted spectrum must fall within the operating range. The allowable range of central wavelengths is narrower than the operating wavelength range by the actual RMS spectral width at each extreme.

2—The 20 dB width for SLM lasers is taken as 6.07 times the RMS width.

The interaction between the transmitter and the chromatic dispersion of the fiber is accounted for by a parameter ε (epsilon), which is defined as the product of 10^{-3} times the signaling speed (in GBd) times the path dispersion (in ps/nm) times the RMS spectral width (in nm).

$$\varepsilon = \text{dispersion} \times \text{length} \times \text{RMS spectral width} \times \text{signaling speed} \times 10^{-3} \quad (45\text{-}2)$$

A maximum ε close to 0.168 is imposed by column 2 of Table 59–5. If the spectral width is kept below the limits of column 3, ε will not exceed 0.115, and the chromatic dispersion penalty is expected to be below 2 dB. The chromatic dispersion penalty is a component of transmitter and dispersion penalty (TDP) which is specified in Table 59–3, Table 59–6 and described in 58.7.9.

59.7.3 Optical power measurements

Optical power shall meet specifications according to the methods specified in ANSI/EIA-455-95. A measurement may be made with the port transmitting any valid encoded 8B/10B data stream.

59.7.4 Extinction ratio measurements

Extinction ratio shall meet specifications according to ANSI/TIA/EIA-526-4A with the port transmitting a repeating idle pattern /I2/ ordered_set (see 36.2.4.12) that may be interspersed with OAM packets per 43B.2, and with minimal back reflections into the transmitter, lower than –20 dB. The /I2/ ordered_set is defined in Clause 36, and is coded as /K28.5/D16.2/ which is binary 001111 1010 100100 0101 within idles. The extinction ratio is expected to be similar for other valid 8B/10B bit streams. The test receiver has the frequency response as specified for the transmitter optical waveform measurement.

59.7.5 OMA measurements (informative)

58.7.5 provides a reference technique for performing OMA measurements.

59.7.6 OMA relationship to extinction ratio and power measurements (informative)

The normative way of measuring transmitter characteristics is extinction ratio and mean power. Clause 58 provides information on how OMA, extinction ratio, and mean power, are related to each other (see 58.7.6).

59.7.7 Relative intensity noise optical modulation amplitude ($RIN_{12}OMA$)

$RIN_{12}OMA$ is the ratio of noise to modulated optical signal in the presence of a back reflection. The measurement procedure is described in 58.7.7.

59.7.8 Transmitter optical waveform (transmit eye)

The required transmitter pulse shape characteristics are specified in the form of a mask of the transmitter eye diagram as shown in Figure 59–4.

The measurement procedure is described in 58.7.8 and references therein.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 331 of 717

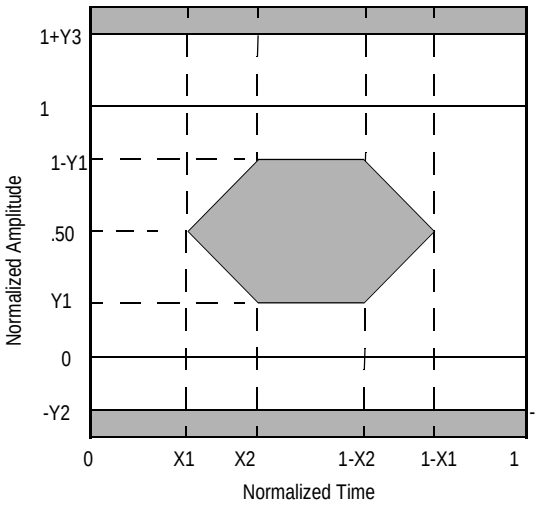


Figure 59–4—Transmitter eye mask definition

The eye shall comply to the mask of the eye using a fourth-order Bessel-Thomson receiver response with *fr* = 0.9375 GHz, and where the relative response vs. relative frequency is defined in ITU-T G.957, Table B.2 (STM-16 values), along with the allowed tolerances for its physical implementation.

NOTES

1—This Bessel-Thomson filter is not intended to represent the noise filter used within an optical receiver, but is intended to provide uniform measurement conditions on the transmitter.

2—The fourth order Bessel-Thomson filter is reactive. In order to suppress reflections, a 6 dB attenuator may be required at the filter input and/or output.

59.7.9 Transmit rise/fall characteristics

Optical response time specifications are based on unfiltered waveforms. Some lasers have overshoot and ringing on the optical waveforms, which, if unfiltered, reduce the accuracy of the 20–80% response times. For the purpose of standardizing the measurement method, measured waveforms shall conform to the mask defined in 59.7.8. If a filter is needed to conform to the mask, the filter response should be removed using the equation:

$$T_{rise,\,fall} = \sqrt{(T_{rise,\,fall,\,measured})^2 - (T_{rise,\,fall,\,filter})^2} \qquad (45\text{-}3)$$

where the filter may be different for rise and fall. Any filter should have an impulse response equivalent to a fourth order Bessel-Thomson filter. The fourth order Bessel-Thomson filter describe in 59.7.8 may be a convenient filter for this measurement, however its low bandwidth adversely impacts the accuracy of the rise and fall time measurements.

59.7.10 Transmitter and dispersion penalty (TDP)

This measurement tests for transmitter impairments with modal (not chromatic) dispersion effects for a transmitter to be used with multimode fiber, and for transmitter impairments with chromatic effects for a transmitter to be used with single mode fiber. Possible causes of impairment include intersymbol interference, jitter, RIN and mode partition noise. Meeting the separate requirements (e.g. eye mask, spectral characteristics) does not in itself guarantee the transmitter and dispersion penalty (TDP). The TDP limit shall be met. See 59.7.9 for details of the measurement.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 332 of 717

59.7.11 Receive sensitivity measurements

Receiver sensitivity is defined for the random pattern test frame (see 59.7.1) and an ideal input signal quality with the specified extinction ratio. The measurement procedure is described in 58.7.10. The sensitivity shall be met for the bit error ratio defined in Table 59–5 or Table 59–7 as appropriate. Stressed sensitivity is described in 59.7.14 and 58.7.11.

59.7.12 Total jitter measurements (informative)

Total jitter measurements may be made according to the method in ANSI X3.230 [B20](FC-PH), Annex A, A.4.2, or according to 58.7.12. Total jitter at TP2 should be measured utilizing a BERT (Bit Error Ratio Tester). References to use of the Bessel-Thomson filter should substitute use of the Bessel-Thomson filter defined in this clause (see 59.7.8). The test should utilize the mixed frequency test pattern specified in 59.7.1.

Total jitter at TP4 should be measured using the conformance test signal at TP3, as specified in 59.7.14. The optical power should be at the stressed receive sensitivity level in Table for 1000BASE-LX10 and in Table 59–7 for 1000BASE-BX10. This power level should be corrected if the extinction ratio differs from the specified extinction ratio (minimum). Measurements at TP4 should be taken directly without additional Bessel-Thomson filters.

Jitter measurement may use a clock recovery unit (commonly referred to in the industry as a “golden PLL”) to remove low-frequency jitter from the measurement as shown in Figure 59–5. The clock recovery unit has a low pass filter with 20 dB/decade rolloff with –3 dB point of 637 kHz. For this measurement, the recovered clock will run at the signaling speed. The golden PLL is used to approximate the PLL in the deserializer function of the PMA. The PMA deserializer is able to track a large amount of low-frequency jitter (such as drift or wander) below its bandwidth. This low-frequency jitter would create a large measurement penalty, but does not affect operation of the link.

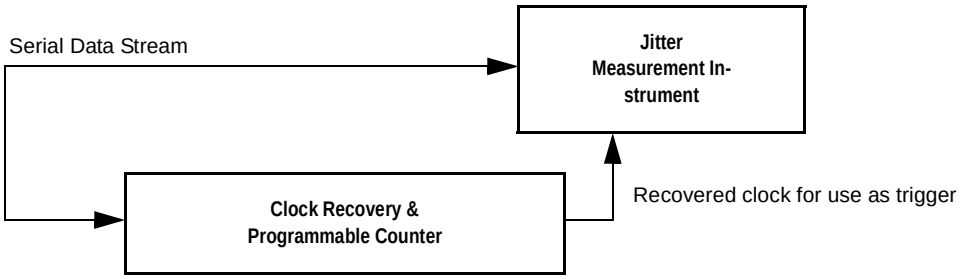


Figure 59–5—Utilization of clock recovery unit during measurement

59.7.13 Deterministic or high probability jitter measurement (informative)

Deterministic jitter may be measured according to ANSI X3.230-1994 [B20] (FC-PH), Annex A, A.4.3, DJ Measurement or high probability jitter may be measured according to 58.7.12. The test utilizes the mixed frequency test pattern specified in 36A.3. This method utilizes a digital sampling scope to measure actual vs. predicted arrival of bit transitions of the 36A.3 data pattern (alternating K28.5 code-groups).

It is convenient to use the clock recovery unit described in 59.7.12 for purposes of generating a trigger for the test equipment. This recovered clock should have a frequency equivalent to 1/20th of the signaling speed.

Measurements at TP2 and TP3 use the filter specified in 59.7.8, measurements at TP1 and TP4 do not use this filter.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 333 of 717

59.7.14 Stressed receiver conformance test

The stressed receiver conformance test is intended to screen against receivers with poor frequency response or timing characteristics which could cause errors when combined with a distorted but compliant signal at TP3. Modal (MMF) or chromatic (SMF) dispersion can cause distortion. The conformance test signal uses the random pattern test frame and is conditioned by applying deterministic jitter and intersymbol interference. If the option for stressed receiver compliance is chosen, the receiver shall meet the specified bit error ratio at the power level and signal quality defined in Table 59–5 and Table 59–7 as appropriate, according to the measurement procedures of 58.7.11.

59.7.15 Measurement of the receiver 3 dB electrical upper cutoff frequency

The receiver 3 dB electrical upper cutoff frequency shall meet specifications according to the methods specified below. The test setup is shown in Figure 59–6. The test is performed with a laser that is suitable for analog signal transmission. The laser is modulated by a digital data signal. In addition to the digital modulation, the laser is modulated with an analog signal. The analog and digital signals should be asynchronous. The data pattern to be used for this test is the random pattern test frame defined in 59.7.1. The frequency response of the laser must be sufficient to allow it to respond to both the digital modulation and the analog modulation. The laser should be biased so that it remains linear when driven by the combined signals. Alternatively the two signals may be combined in the optical domain.

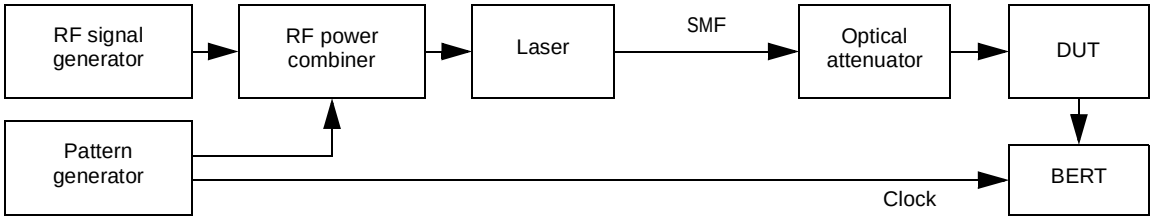


Figure 59–6—Test setup for receiver bandwidth measurement

The 3 dB upper cutoff frequency is measured using the following steps a) through e):

a) Calibrate the frequency response characteristics of the test equipment including the analog radio frequency (RF) signal generator, RF power combiner, and laser source. Measure the laser's extinction ratio according to 59.7.4. With the exception of extinction ratio, the optical source shall meet the requirements of Clause 59.
b) Configure the test equipment as shown in Figure 59–6. Take care to minimize changes to the signal path that could affect the system frequency response after the calibration in step a. Connect the laser output with no RF modulation applied to the receiver under test through an optical attenuator and taking into account the extinction ratio of the source, set the optical power to a level that approximates the stressed receive sensitivity level in Table for 1000BASE-LX10 and in Table 59–7 for 1000BASE-BX10.
c) Locate the center of the eye with the BERT. Turn on the RF modulation while maintaining the same average optical power established in step (b).
d) Measure the necessary RF modulation amplitude (in dBm) required to achieve a constant BER (e.g., 10^{-8}) for a number of frequencies.
e) The receiver 3 dB electrical upper cutoff frequency is that frequency where the corrected RF modulation amplitude (the measured amplitude in step (d) corrected with the calibration data in step (a) increases by 3 dB (electrical). If necessary, interpolate between the measured response values.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 334 of 717

59.8 Environmental, safety and labeling specifications

59.8.1 General Safety

All equipment meeting this standard shall conform to IEC 60950.

59.8.2 Laser safety

1000BASE-BX10 and 1000BASE-LX10 optical transceivers shall conform to Class 1 laser requirements as defined in IEC 60825-1, under any condition of operation. This includes single fault conditions whether coupled into a fiber or out of an open bore. Conformance to additional laser safety standards may be required for operation within specific geographical regions.

Laser safety standards and regulations require that the manufacturer of a laser product provide information about the product's laser, safety features, labeling, use, maintenance and service. This documentation shall explicitly define requirements and usage restrictions on the host system necessary to meet these safety certifications.

59.8.3 Installation

It is recommended that proper installation practices, as defined by applicable local codes and regulations, be followed in every instance in which such practices are applicable.

59.8.4 Environment

Reference Annex 67A for additional environmental information.

Two optional temperature ranges are defined in Table 59–15. Implementations shall be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

Table 59–15—Component case temperature classes

Class	Low temperature (°C)	High temperature (°C)
Warm extended	–5	+85
Cool extended	–40	+60
Universal extended	–40	+85

59.8.5 PMD labelling requirements

It is recommended that each PHY (and supporting documentation) be labeled in a manner visible to the user, with at least the applicable safety warnings and the applicable port type designation (e.g., 1000BASE-BX10-U).

Labeling requirements for Class 1 lasers are given in the laser safety standards referenced in 59.8.2.

Compliant systems and field pluggable components shall be clearly labeled with the operating temperature range over which their compliance is ensured.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 335 of 717

59.9 Characteristics of the fiber optic cabling

The 1000BASE-BX10 and 1000BASE-LX10 fiber optic cabling shall meet the dispersion and modal bandwidth specifications defined in IEC 60793-2 and ITU-T G.652, as shown in Table 59–16. The fiber cable attenuation is shown for information only; the end-to-end channel loss shall meet the requirements of Table 59–1. The fiber optic cabling consists of one or more sections of fiber optic cable and any intermediate connections required to connect sections together. The fiber optic cabling spans from one MDI to another MDI, as shown in Figure 59–7.

59.9.1 Fiber optic cabling model

The fiber optic cabling model is shown in Figure 59–7.

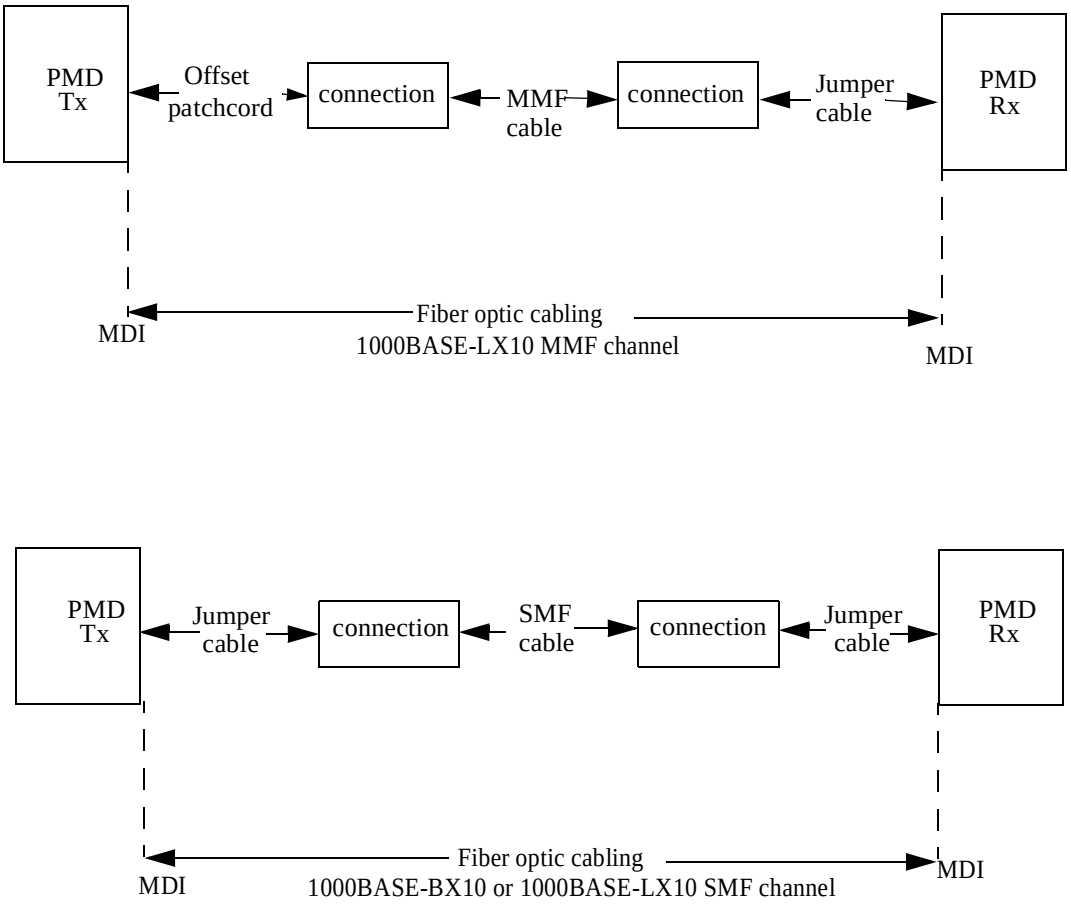


Figure 59–7—Fiber optic cable model

The maximum channel insertion loss shall meet the requirements specified in Table 59–1. The minimum loss for 1000BASE-BX10 and 100BASE-LX10 is zero. A channel may contain additional connectors or other optical elements as long as the optical characteristics of the channel, such as attenuation, dispersion and reflections, meet the specifications. Insertion loss measurements of installed fiber cables are made in accordance with ANSI/TIA/EIA-526-14A [B14], method B for multimode cabling and ANSI/TIA/EIA-526-7 [B15], method A-1 for single-mode cabling. The fiber optic cabling model (channel) defined here is the same as a simplex fiber optic link segment. The term channel is used here for consistency with generic cabling standards.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 336 of 717

59.9.2 Optical fiber and cable

The fiber optic cable requirements are satisfied by the fibers specified in IEC 60793-2 Type B1.1 (dispersion un-shifted single-mode fiber) and Type B1.3 (low water peak single-mode fiber) and ITU-T G.652 as noted in Table 59–16.

Table 59–16—Optical fiber and cable characteristics

Description[a]	B1.1, B1.3 SMF		50 µm MMF	62.5 µm MMF	Unit
Nominal fiber specification wavelength[b]	1310	1550	1300		nm
Fiber cable attenuation (max)[c]	0.4	0.35	1.5		dB/km
Modal Bandwidth (min; overfilled launch)	N/A		500[d]		MHz· km
Zero dispersion wavelength[e]	$1300 \le \lambda_0 \le 1324$		$1295 \le \lambda_0 \le 1320$	$1320 \le \lambda_0 \le 1365$	nm
Dispersion slope (max)	0.093		0.11 for $1300 \le \lambda_0 \le 1320$ and $0.001(\lambda_0-1190)$ for $1295 \le \lambda_0 \le 1300$	0.11 for $1320 \le \lambda_0 \le 1348$ and $0.001(1458-\lambda_0)$ for $1348 \le \lambda_0 \le 1365$	ps /nm^2 · km

[a]The fiber dispersion values are normative, all other values in the table are informative.
[b]The wavelength specified is the nominal fiber specification wavelength which is the typical measurement wavelength. Power penalties at other wavelengths are accounted for.
[c]Attenuation values are informative. Attenuation for single-mode optical fiber cables is defined in ITU-T G.652 and for multimode fiber cables is defined in ISO/IEC 11801.
[d]1000BASE-LX10 is rated for 550 m of 500 MHz·km fiber, while 1000BASE-LX also covered 550 m of 400 MHz·km, but this now seen as a historical bandwidth requirement.
[e]See IEC 60793 or G.652 for correct use of zero dispersion wavelength and dispersion slope.

59.9.3 Optical fiber connection

The maximum link distances for multimode fiber are calculated based on the allocation of 1.5 dB total connection and splice loss. Connections with different loss characteristics may be used provided the requirements of Table 59–1 are met.

The maximum link distances for single mode fiber are calculated based on the allocation of 2 dB total connection and splice loss for 1000BASE-LX10 and 1000BASE-BX10. Connections with different loss characteristics may be used provided the requirements of Table 59–1 are met.

The maximum discrete reflectance for multi-mode connections shall be less than –20 dB.

The maximum discrete reflectance for single mode connections shall be less than –26 dB.

59.9.4 Medium Dependent Interface (MDI)

The 1000BASE-LX10 or 1000BASE-BX10 PMD is coupled to the fiber cabling at the MDI. The MDI is the interface between the PMD and the “fiber optic cabling” as shown in Figure 59–7. Examples of an MDI include:

a) Connectorized fiber pigtail
b) PMD receptacle

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 337 of 717

When the MDI is a remateable connection, it shall meet the interface performance specifications of IEC 61753-1. The MDI carries the signal in both directions. For 1000BASE-BX10 it couples a single fiber and for 1000BASE-LX10 it couples dual fibers.

NOTE—Compliance testing is performed at TP2 and TP3 as defined in 59.2.1, not at the MDI.

59.9.5 Single-mode fiber offset-launch mode-conditioning patch cord for MMF operation of 1000BASE-LX10

This subclause specifies an example embodiment of a mode conditioner for 1000BASE-LX10 operation with MMF cabling. The mode conditioner consists of a single-mode fiber permanently coupled off-center to a graded index fiber. This example embodiment of a patch cord is not intended to exclude other physical implementations of offset-launch mode conditioners. However, any implementation of an offset-launch mode conditioner used for 1000BASE-LX10 shall meet the specifications of Table 59–17. The offset launch shall be contained within the patch cord assembly and is not adjustable by the user.

NOTE—The single-mode fiber offset-launch mode-conditioning patch cord described in Clause 38 may be used, although its labeling and coloring requirements are not mandatory here. See 38.11.4.

Table 59–17—Single-mode fiber offset-launch mode conditioner specifications

Description	62.5 μm MMF	50 μm MMF	Unit
Maximum insertion loss	0.5	0.5	dB
Coupled Power Ratio (CPR)	28 < CPR < 40	12 < CPR < 20	dB
Optical center offset between SMF and MMF	17 < Offset < 23	10 < Offset < 16	μm
Maximum angular offset	1	1	degree

Patch cord connectors and ferrules for the single-mode-to-multimode offset launch shall have single-mode tolerances, float and other mechanical requirements according to IEC 61754-1.

The single-mode fiber used in the construction of the single-mode fiber offset-launch mode conditioner shall meet the requirements of 59.9.2. The multimode fiber used in the construction of the single-mode fiber offset-launch mode conditioner shall be of the same type as the cabling over which the 1000BASE-LX10 link is to be operated. If the cabling is 62.5 μm MMF then the MMF used in the construction of the mode conditioner is of type 62.5 μm MMF. If the cabling is 50 μm MMF, then the MMF used in the construction of the mode conditioner is of type 50 μm MMF.

Figure 59–8 shows an example of an embodiment of the single-mode fiber offset-launch mode-conditioning patch cord. This patch cord consists of duplex fibers including a single-mode-to-multimode offset launch fiber connected to the transmitter MDI and a second conventional graded index MMF connected to the receiver MDI. The preferred configuration is a plug-to-plug patch cord since it maximizes the power budget margin of the 1000BASE-LX10 link. The single-mode end of the patch cord is labeled “To Equipment”. The multimode end of the patch cord is labeled “To Cable.” The recommended color identifier of the single-mode fiber connector is blue. The recommended color identifier of all multimode fiber connector plugs is beige. The patch cord assembly is labeled “Offset-launch mode-conditioning patch cord assembly.” Labelling identifies which size multimode fiber is used in the construction of the patch cord. The keying of this duplex optical plug ensures that the single-mode fiber end is automatically aligned to the transmitter MDI.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 338 of 717

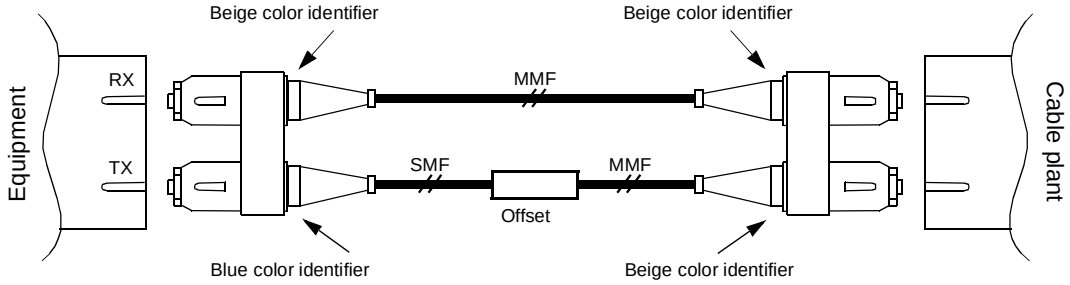


Figure 59–8—1000BASE-LX10 single-mode fiber offset-launch mode-conditioning patch cord assembly

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 339 of 717

59.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 59, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 (Long Wavelength) and 1000BASE-BX10 (BiDirectional Long Wavelength)[8]

59.10.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 59, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 and type 1000BASE-LX10, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

59.10.2 Identification

59.10.2.1 Implementation identification

Supplier[1]	
Contact point for enquiries about the PICS[1]	
Implementation Name(s) and Version(s)[1, 3]	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Name(s)[2]	
NOTES 1—Required for all implementations. 2—May be completed as appropriate in meeting the requirements for the identification. 3—The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

[8]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 340 of 717

59.10.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Clause 59, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-LX10 and 1000BASE-BX10
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	

Date of Statement	

59.10.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
HT	High temperature operation	59.8.4	–5 to 85°C	O	Yes [ ] No [ ]
LT	Low temperature operation	59.8.4	–40 to 60°C	O	Yes [ ] No [ ]
*LX	1000BASE-LX10 PMD	59.3	Device supports long wavelength (1310 nm) over dual multimode and single-mode fibers.	O/1	Yes [ ] No [ ]
*BXD	1000BASE-BX10-D PMD	Table	Device operates with one single single-mode fiber and transmits at downstream wavelength (1490 nm).	O/1	Yes [ ] No [ ]
*BXU	1000BASE-BX10-U PMD	Table	Device operates with one single single-mode fiber and transmits upstream wavelength (1310 nm).	O/1	Yes [ ] No [ ]
*INS	Installation / cable	59.9	Items marked with INS include installation practices and cable specifications not applicable to a PHY manufacturer.	O	Yes [ ] No [ ]
*OFP	Single-mode offset-launch mode-conditioning patch cord	59.9.5	Items marked with OFP include installation practices and cable specifications not applicable to a PHY manufacturer.	O	Yes [ ] No [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 341 of 717

59.10.3.1 PMD functional specifications

Item	Feature	Subclause	Value/Comment	Status	Support
FN1	Transmit function	59.2.2	Convey bits requested by PMD_UNITDATA.request() to the MDI.	M	Yes [ ]
FN2	Transmitter optical signal	59.2.2	Higher optical power is a logical 1.	M	Yes [ ]
FN3	Receive function	59.2.3	Convey bits received from the MDI to PMD_UNITDATA.indicate().	M	Yes [ ]
FN4	Receiver optical signal	59.2.3	Higher optical power is a logical 1.	M	Yes [ ]
FN5	Signal detect function	59.2.4	Mapping to PMD interface.	M	Yes [ ]
FN6	Signal detect behaviour	59.2.4	Generated according to Table 59–2.	M	Yes [ ]

59.10.3.2 PMD to MDI optical specifications for 1000BASE-LX10

Item	Feature	Subclause	Value/Comment	Status	Support
LX1	1000BASE-LX10 transmitter	59.3.1	Transmitter meets specifications in Table 59–3.	LX:M	Yes [ ] N/A [ ]
LX2	Offset-launch mode-conditioning patch cord	59.3.1	Required for LX10 multi-mode operation.	OFP:M	Yes [ ] N/A [ ]
LX3	1000BASE-LX10 receiver	59.3.2	Receiver meets mandatory specifications in Table 59–5.	LX:M	Yes [ ] N/A [ ]
LX4	1000BASE-LX10 stressed receiver sensitivity	59.3.2	Receiver meets mandatory specifications in Table 59–5	LX:M	Yes [ ] N/A [ ]

59.10.3.3 PMD to MDI optical specifications for 1000BASE-BX10-D

Item	Feature	Subclause	Value/Comment	Status	Support
BXD1	1000BASE-BX10-D transmitter	59.4.1	Transmitter meets specifications in Table 59–6.	BXD:M	Yes [ ] N/A [ ]
BXD2	1000BASE-BX10-D receiver	59.4.2	Receiver meets mandatory specifications in Table 59–7.	BXD:M	Yes [ ] N/A [ ]
BXD3	1000BASE-BX10-D stressed receiver sensitivity	59.4.2	Receiver meets specifications in Table 59–7.	BXD:O	Yes [ ] No [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 342 of 717

59.10.3.4 PMD to MDI optical specifications for 1000BASE-BX10-U

Item	Feature	Subclause	Value/Comment	Status	Support
BXU1	1000BASE-BX10-U transmitter	59.4.1	Transmitter meets specifications in Table 59–6.	BXU:M	Yes [ ] N/A [ ]
BXU2	1000BASE-BX10-U receiver	59.4.2	Receiver meets mandatory specifications in Table 59–7.	BXU:M	Yes [ ] N/A [ ]
BXU3	1000BASE-BX10-U stressed receiver sensitivity	59.4.2	Receiver meets specifications in Table 59–7.	BXU:O	Yes [ ] No [ ] N/A [ ]

59.10.3.5 Optical Measurement Requirements

Item	Feature	Subclause	Value/Comment	Status	Support
OM1	Measurement cable		2 to 5 m in length	M	Yes [ ]
OM2	Test patterns	59.7.1	See Table 59–11	M	Yes [ ]
OM3	Wavelength and spectral width	59.7.2	Per TIA/EIA-455-127 under modulated conditions.	M	Yes [ ]
OM4	Average optical power	59.7.3	Per TIA/EIA-455-95	M	Yes [ ]
OM5	Extinction ratio	59.7.4	Per ANSI/TIA/EIA-526-4A with minimal back reflections and fourth-order Bessel-Thomson receiver.	M	Yes [ ]
OM6	$RIN_{12}OMA$	58.7.7	As described in 58.7.7	M	Yes [ ]
OM7	Transmit optical waveform (transmit eye)	59.7.8	Per ANSI/TIA/EIA-526-4A with test pattern and fourth-order Bessel-Thomson receiver.	M	Yes [ ]
OM8	Transmit rise/fall characteristics	59.7.9	Waveforms conform to mask in Figure 59–4, measure from 20% to 80%, using patch cable per 59.7.	LX:M	Yes [ ]
OM9	Transmitter and dispersion penalty	59.7.10	As described in 58.7.9	M	Yes [ ]
OM10	Receive sensitivity	59.7.11	With specified pattern	M	Yes [ ]
*OM11	Stressed receiver conformance	59.7.14	As described in 59.7.14	O	Yes [ ] N/A[ ]
OM12	Receiver 3dB electrical upper cutoff frequency	59.7.15	As described in 59.7.15	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 343 of 717

59.10.3.6 Environmental, safety and labeling specifications

Item	Feature	Subclause	Value/Comment	Status	Support
ES1	General safety	59.8.1	Conforms to IEC 60950.	M	Yes [ ]
ES2	Laser safety - IEC Class 1	59.8.2	Conforms to Class 1 laser requirements defined in IEC 60825-1.	M	Yes [ ]
ES3	Documentation	59.8.2	Explicitly define requirements and usage restrictions to meet safety certifications.	M	Yes [ ]
ES4	Operating temperature range labeling	59.8.5	If required, label range over which compliance is ensured.	M	Yes [ ] N/A[ ]

59.10.3.7 Characteristics of the fiber optic cabling

Item	Feature	Subclause	Value/Comment	Status	Support
FO1	Fiber optic cabling	59.9	Meets specifications in Table 59–16.	INS:M	Yes [ ] N/A [ ]
FO2	End-to-end channel loss	59.9.1	Meet the requirements specified in Table 59–1.	INS:M	Yes [ ] N/A [ ]
FO3	Maximum discrete reflectance for multimode connections	59.9.3	Less than –20 dB	INS:M	Yes [ ] N/A [ ]
FO4	Maximum discrete reflectance for single-mode connections	59.9.3	Less than –26 dB	INS:M	Yes [ ] N/A [ ]
FO5	MDI Requirements	59.9.4	Meet the interface performance specifications of IEC 61753-1, if remateable.	INS:O	Yes [ ] No[ ] N/A [ ]

59.10.3.8 Offset-launch mode-conditioning patch cord

Item	Feature	Subclause	Value/Comment	Status	Support
LPC1	Offset-launch mode-conditioning patch cord	59.9.5	Meet conditions of 59.9.5	OFP:M	Yes [ ] N/A [ ]
LPC2	Single-mode mechanics in offset-launch mode-conditioning patch cords	59.9.5	IEC 61754-1: 1997 [B25] grade 1 ferrule	OFP:M	Yes [ ] N/A [ ]
LPC3	Single-mode fiber in offset-launch mode-conditioning patch cords	59.9.5	Per 59.9.5	OFP:M	Yes [ ] N/A [ ]
LPC4	Multimode fiber in offset-launch mode-conditioning patch cords	59.9.5	Same type as used in cable plant	OFP:M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.

60. Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks)

60.1 Overview

The 1000BASE-PX10 and 1000BASE-PX20 PMD sublayers provide point-to-multipoint (P2MP) 1000BASE-X connections over passive optical networks (PONs) up to at least 10 km and 20 km, respectively and with a typical split ratio of 1:16. In an Ethernet PON, a single downstream (D) PMD broadcasts to multiple upstream (U) PMDs and receives bursts from each "U" PMD over a single branched topology, single-mode fiber network. The same fibers are used simultaneously in both directions. This clause specifies the 1000BASE-PX10-D PMD, 1000BASE-PX10-U PMD, 1000BASE-PX20-D PMD and the 1000BASE-PX20-U PMD (including MDI) and the medium, single-mode fiber. A 1000BASE-PX-U PMD or a 1000BASE-PX-D PMD is connected to the appropriate 1000BASE-X PMA of Clause 65, and to the medium through the MDI. A PMD is optionally combined with the management functions that may be accessible through the management interface defined in Clause 22 or by other means.

A 1000BASE-PX10 link uses a 1000BASE-PX10-U PMD at one end and a 1000BASE-PX10-D PMD at the other. A 1000BASE-PX20 link uses a 1000BASE-PX20-U PMD at one end and a 1000BASE-PX20-D PMD at the other. A 1000BASE-PX20-D PMD is interoperable with a 1000BASE-PX10-U PMD. This allows certain upgrade possibilities from 10 km to 20 km PONs. Typically, the 1490 nm band is used to transmit away from the center of the network D and the 1310 nm band towards the center U. The suffixes D and U indicate the PMDs at each end of a link which transmit in these directions and receive in the opposite directions. The splitting ratio or reach length may be increased in an FEC enabled link. FEC refers to Forward Error Correction for P2MP optical links and is described in 65.2. The maximum reach length is not limited by the protocol, see 64.3.3.

Two optional temperature ranges are defined; see 60.8.4 for further details. Implementations may be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

Table 60–1 shows the primary attributes of each PMD type.

Table 60–1—PMD types specified in this Clause

Description	1000BASE-PX10-U	1000BASE-PX10-D	1000BASE-PX20-U	1000BASE-PX20-D	Unit
Fiber type	B1.1, B1.3 SMF				
Number of fibres	1				
Nominal transmit wavelength	1310	1490	1310	1490	nm
Transmit direction	Upstream	Downstream	Upstream	Downstream	
Minimum range[a]	0.5 m –10 km		0.5 m –20 km		
Maximum channel insertion loss[b]	20	19.5	24	23.5	dB
Minimum channel insertion loss[c]	5		10		dB

[a]In an FEC enabled link, the minimum range may be increased, or, links with a higher channel insertion loss may be used.
[b]at nominal transmit wavelength
[c]the differential insertion loss for a link is the difference between the maximum and minimum channel insertion loss

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 345 of 717

60.1.1 Goals and objectives

The following are the objectives of 1000BASE-PX10 and 1000BASE-PX20:

a) Point to multipoint on optical fiber.
b) 1000 Mbps up to 10 km on one single-mode fiber supporting a fiber split ratio of 1:16.
c) 1000 Mbps up to 20 km on one single-mode fiber supporting a fiber split ratio of 1:16.
d) BER better than or equal to 10^{-12} at the PHY service interface.

60.1.2 Positioning of this PMD set within the IEEE 802.3 architecture

Figure 60–1 depicts the relationships of the PMD (shown shaded) with other sublayers and the ISO/IEC Open System Interconnection (OSI) reference model.

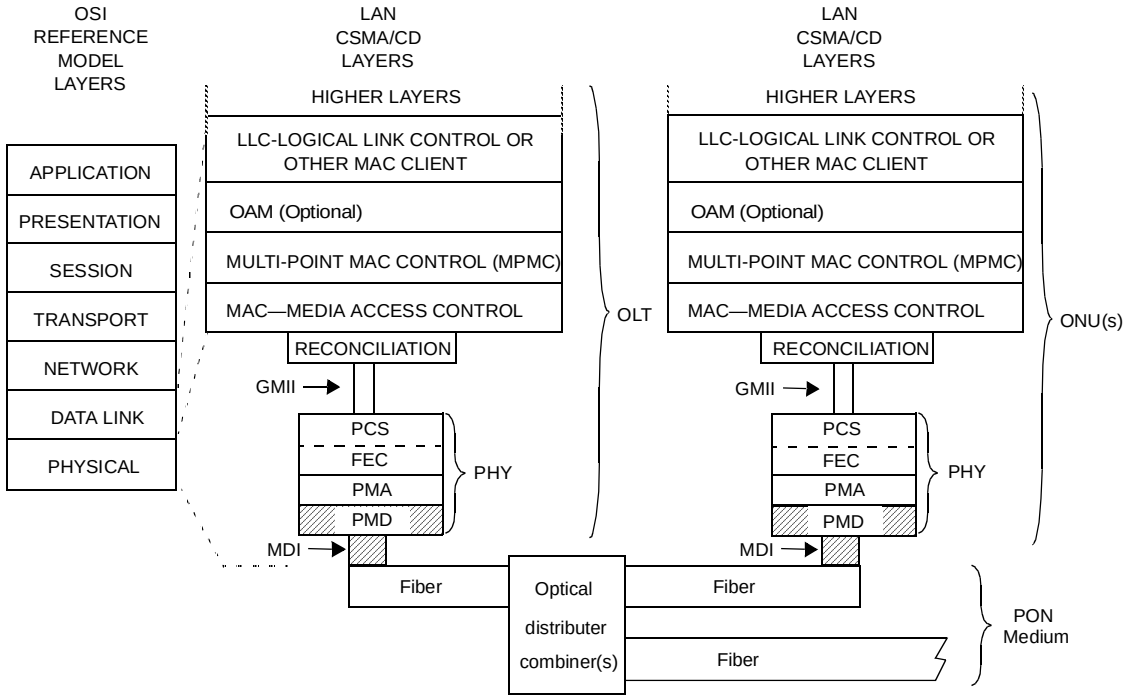


Figure 60–1—P2MP PMDs relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model and the IEEE 802.3 CSMA/CD LAN model

60.1.3 Terminology and conventions

The following list contains references to terminology and conventions used in this clause:

Basic terminology and conventions, see 1.1 and 1.2.

Normative references, see 1.3.

Definitions, see 1.4.

Abbreviations, see 1.5.

Informative references, see Annex A.

Introduction to 1000 Mb/s baseband networks, see Clause 34.

Introduction to Ethernet for subscriber access networks, see Clause 56.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 346 of 717

60.1.4 Physical Medium Dependent (PMD) sublayer service interface

The following specifies the services provided by the 1000BASE-PX10 and 1000BASE-PX20 PMDs. These PMD sublayer service interfaces are described in an abstract manner and do not imply any particular implementation. The PMD Service Interface supports the exchange of 8B/10B code-groups between the PMA and PMD entities. The PMD translates the serialized data of the PMA to and from signals suitable for the specified medium. The following primitives are defined:

PMD_UNITDATA.request

PMD_UNITDATA.indicate

PMD_SIGNAL.request

PMD_SIGNAL.indicate

60.1.5 Delay constraints

Delay requirements from the MDI to the GMII which include the PMD layer are specified in Clause 36. Of the budget, up to 20 ns is reserved for each of the transmit and receive functions of the PMD to account for those cases where the PMD includes a pigtail.

60.1.5.1 PMD_UNITDATA.request

This primitive defines the transfer of a serial data stream from the PMA to the PMD.

The semantics of the service primitive are PMD_UNITDATA.request(tx_bit). The data conveyed by PMD_UNITDATA.request is a continuous stream of bits. The tx_bit parameter can take one of two values: ONE or ZERO. The PMA continuously sends the appropriate stream of bits to the PMD for transmission on the medium, at a nominal 1.25 GBd signaling speed. Upon receipt of this primitive, the PMD converts the specified stream of bits into the appropriate signals at the MDI.

60.1.5.2 PMD_UNITDATA.indicate

This primitive defines the transfer of data from the PMD to the PMA.

The semantics of the service primitive are PMD_UNITDATA.indicate(rx_bit). The data conveyed by PMD_UNITDATA.indicate is a continuous stream of bits. The rx_bit parameter can take one of two values: ONE or ZERO. The PMD continuously sends a stream of bits to the PMA corresponding to the signals received from the MDI.

60.1.5.3 PMD_SIGNAL.request

In the upstream direction, this primitive is generated by the PCS to turn on and off the transmitter according to the granted time. A signal for laser control is generated in 65.3.1.1.

The semantics of the service primitive are PMD_SIGNAL.request(tx_enable). The tx_enable parameter can take on one of two values: ENABLE or DISABLE, determining whether the PMD transmitter is on (enabled) or off (disabled). The PCS generates this primitive to indicate a change in the value of tx_enable. Upon receipt of this primitive, the PMD turns the transmitter on or off as appropriate.

60.1.5.4 PMD_SIGNAL.indicate

This primitive is generated by the PMD to indicate the status of the signal being received from the MDI.

The semantics of the service primitive are PMD_SIGNAL.indicate(SIGNAL_DETECT). The SIGNAL_DETECT parameter can take on one of two values: OK or FAIL, indicating whether the PMD is detecting light at the receiver (OK) or not (FAIL). When SIGNAL_DETECT = FAIL, PMD_UNITDATA.indicate(rx_bit) is undefined. The PMD generates this primitive to indicate a change in the value of SIGNAL_DETECT. If the MDIO interface is implemented, then PMD_global_signal_detect shall be continuously set to the value of SIGNAL_DETECT.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 347 of 717

NOTE—SIGNAL_DETECT = OK does not guarantee that PMD_UNITDATA.indicate(rx_bit) is known good. It is possible for a poor quality link to provide sufficient light for a SIGNAL_DETECT = OK indication and still not meet the specified bit error ratio. PMD_SIGNAL.indicate(SIGNAL_DETECT) has different characteristics for upstream and downstream links, see 60.2.4.

60.2 PMD functional specifications

The 1000BASE-PX PMDs perform the transmit and receive functions that convey data between the PMD service interface and the MDI.

60.2.1 PMD block diagram

The PMD sublayer is defined at the four reference points shown in Figure 60–2 where the first digit represents the downstream direction and the second the upstream. Two points, TP2 and TP3, are compliance points. TP1 and TP4 are reference points for use by implementers. The optical transmit signal is defined at the output end of a patch cord (TP2), between 2 and 5 m in length, of a fibre type consistent with the link type connected to the transmitter. Unless specified otherwise, all transmitter measurements and tests defined in Figure 60-2 are made at TP2. The optical receive signal is defined at the output of the fiber optic cabling (TP3) connected to the receiver. Unless specified otherwise, all receiver measurements and tests defined in Figure 60-2 are made at TP3.

The electrical specifications of the PMD service interface (TP1 and TP4) are not system compliance points (these are not readily testable in a system implementation). It is expected that in many implementations, TP1 and TP4 will be common between 1000BASE-PX PMDs.

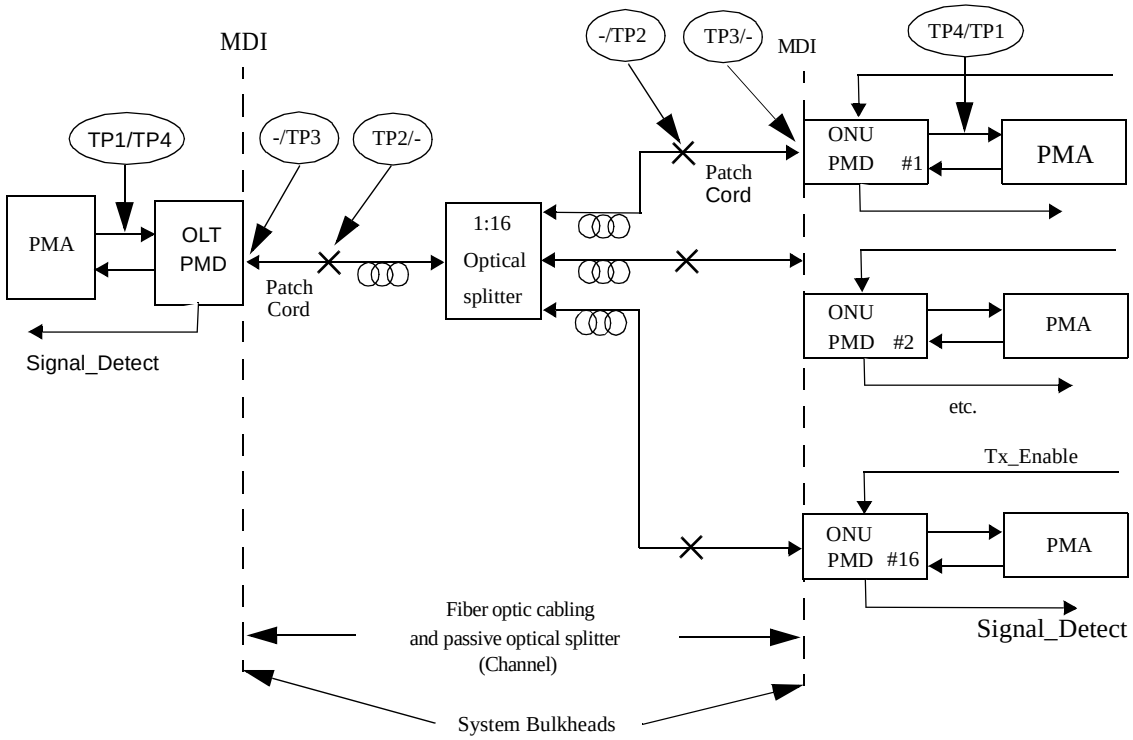


Figure 60–2—1000BASE-PX block diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 348 of 717

60.2.2 PMD transmit function

The PMD Transmit function shall convey the bits requested by the PMD service interface message PMD_UNITDATA.request(tx_bit) to the MDI according to the optical specifications in this clause. The higher optical power level shall correspond to tx_bit =ONE.

In the upstream direction, the flow of bits is interrupted according to PMD_SIGNAL.request(tx_enable). This implies three optical levels, 1, 0, and dark, the latter corresponding to the transmitter being in the OFF state.

60.2.3 PMD receive function

The PMD Receive function shall convey the bits received from the MDI according to the optical specifications in this clause to the PMD service interface using the message PMD_UNITDATA.indicate(rx_bit). The higher optical power level shall correspond to rx_bit = ONE.

60.2.4 PMD signal detect function

60.2.4.1 ONU PMD signal detect (downstream)

The PMD Signal Detect function for the continuous mode downstream signal shall report to the PMD service interface, using the message PMD_SIGNAL.indicate(SIGNAL_DETECT) which is signaled continuously. PMD_SIGNAL.indicate is intended to be an indicator of optical signal presence.

The value of the SIGNAL_DETECT parameter shall be generated according to the conditions defined in Table 60–2 for 1000BASE-PX. The PMD receiver is not required to verify whether a compliant 1000BASE-PX signal is being received.

60.2.4.2 OLT PMD signal detect (upstream)

The response time for the PMD Signal Detect function for the burst mode upstream signal may be longer or shorter than a burst length, thus, it may not fulfill the traditional requirements placed on Signal Detect. PMD_SIGNAL.indicate is intended to be an indicator of optical signal presence. The signal detect function in the OLT may be realized in the PMD or PMA layer.

The value of the SIGNAL_DETECT parameter shall be generated according to the conditions defined in Table 60–2 for 1000BASE-PX. The PMD receiver is not required to verify whether a compliant 1000BASE-PX signal is being received.

60.2.4.3 1000BASE-PX Signal detect functions

The Signal Detect value definitions for the 1000BASE-PX PMDs are shown in Table 60–2

Table 60–2—1000BASE-PX SIGNAL_DETECT value definition

Receive conditions		Signal_detect value
1000BASE-PX10	**1000BASE-PX20**	
Average input optical power ≤ Signal Detect Threshold (min) in Table 60–5 at the specified receiver wavelength	Average input optical power ≤ Signal Detect Threshold (min) in Table 60–8 at the specified receiver wavelength	FAIL
Average input optical power ≥ Receive sensitivity (max) in Table 60–5 with a compliant 1000BASE-X signal input at the specified receiver wavelength	Average input optical power ≥ Receive sensitivity (max) in Table 60–8 with a compliant 1000BASE-X signal input at the specified receiver wavelength	OK
All other conditions	All other conditions	Unspecified

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 349 of 717

60.2.5 PMD transmit enable function for ONU

PMD_SIGNAL.request(tx_enable) is defined for the two ONU PMDs. PMD_SIGNAL.request(tx_enable) is asserted prior to data transmission by the ONU PMDs.

60.3 PMD to MDI optical specifications for 1000BASE-PX10-D and 1000BASE-PX10-U

The operating range for 1000BASE-PX10 is defined in Table 60–1. A 1000BASE-PX10 compliant transceiver supports all media types listed in Table 60–14 according to the specifications described in 60.9. A transceiver which exceeds the operational range requirement while meeting all other optical specifications is considered compliant (e.g., a single-mode solution operating at 10.5 km meets the minimum range requirement of 0.5 m to 10 km for 1000BASE-PX10).

NOTE—The specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is defined in 58.7.6.

60.3.1 Transmitter optical specifications

The 1000BASE-PX10-D and 1000BASE-PX10-U transmitter's signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 60–3 per measurement techniques described in 60.7. Its RIN_{15}OMA should meet the value listed in Table 60–3 per measurement techniques described in 60.7.7.

Table 60–3—1000BASE-PX10-D and 1000BASE-PX10-U transmit characteristics

Description	1000BASE-PX10-D	1000BASE-PX10-U	Unit
Nominal transmitter type[a]	Longwave Laser	Longwave Laser	
Signaling speed (range)	1.25 ± 100 ppm	1.25 ± 100 ppm	GBd
Wavelength[b] (range)	1480 to 1500	1260 to 1360	nm
RMS spectral width (max)	see Table 60–4		nm
Average launch power (max)	+2	+4	dBm
Average launch power (min)	–3	–1	dBm
Average launch power of OFF transmitter (max)	–39	–45	dBm
Extinction ratio (min)	6	6	dB
RIN_{15}OMA (max)	–118	–113	dB/Hz
Launch OMA (min)	–2.2 (0.6)	–0.22 (0.95)	dBm (mW)
Transmitter eye mask definition {X1, X2, Y1, Y2, Y3}	{0.22, 0.375, 0.20, 0.20, 0.30}	{0.22, 0.375, 0.20, 0.20, 0.30}	UI
Ton (max)	N/A	512	ns
Toff (max)	N/A	512	ns
Optical return loss tolerance (max)	15	15	dB
Optical return loss of ODN (min)	20	20	dB
Transmitter reflectance (max)	–10	–6	dB
Transmitter and dispersion penalty (max)	1.3	2.8	dB
Decision timing offset for transmitter and dispersion penalty (min)	± 0.1	± 0.125	UI

[a]The nominal device type is not intended to be a requirement on the source type, and any device meeting the transmitter characteristics specified may be substituted for the nominal device type.
[b]This represents the range of centre wavelength ±1σ of the rms spectral width.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 350 of 717

The maximum The maximum RMS spectral width vs. wavelength for 1000BASE-PX10 is shown in Table 60–4 and for 1000BASE-PX10-U in Figure 60–3. The equation used to generate these values is included in 60.7.2. The central column values are normative, the right hand column is informative.

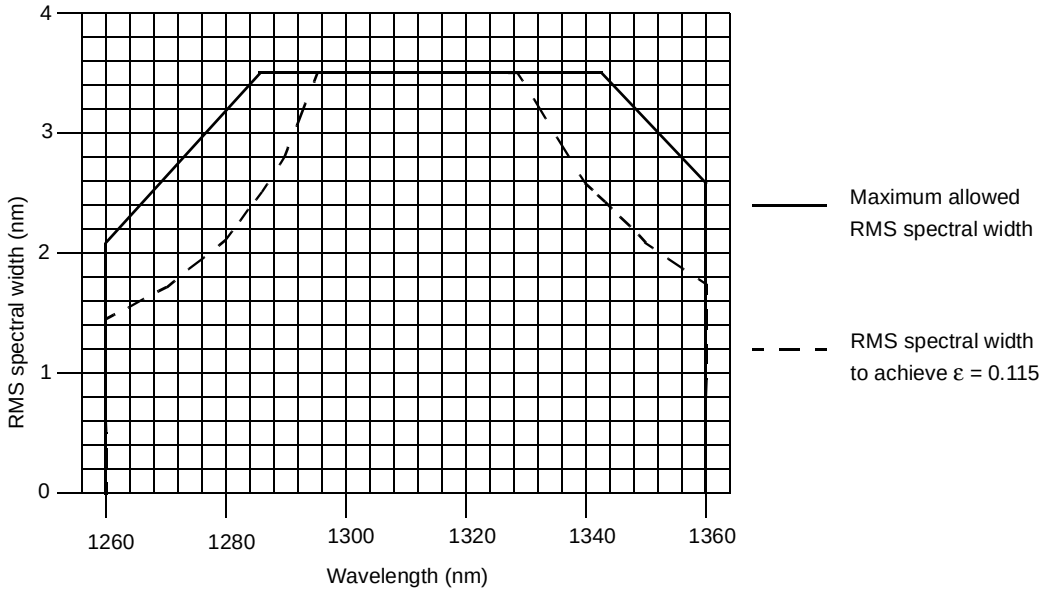


Figure 60–3—1000BASE-PX10-U transmitter spectral limits

Table 60–4—1000BASE-PX10-D and 1000BASE-PX10-U transmitter spectral limits

Center Wavelength	RMS spectral width (max)[a]	RMS spectral width to achieve epsilon ε <=0.115 (informative)
nm	**nm**	**nm**
1260	**2.09**	1.43
1270	**2.52**	1.72
1280	**3.13**	2.14
1286	**3.50**	2.49
1290		2.80
1297		3.50
1329		
1340		2.59
1343		2.41
1350	**3.06**	2.09
1360	**2.58**	1.76
1480 to 1500	**0.88**	0.60

[a]These limits for the 1000BASE-PX10-U transmitter are illustrated in Figure 60–3. The equation used to calculate these values is detailed in 60.7.2. Limits at intermediate wavelengths may be found by interpolation.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 351 of 717

60.3.2 Receiver optical specifications

The 1000BASE-PX10-D and 1000BASE-PX10-U receiver's signaling speed, operating wavelength, overload, sensitivity, reflectivity and signal detect shall meet the specifications defined in Table 60–5 per measurement techniques defined in 60.7.10. Its stressed receive characteristics should meet the values listed in Table 60–5 per measurement techniques described in 60.7.11 Either the damage threshold included in Table 60–5 shall be met, or, the receiver shall be labelled to indicate the maximum optical input power level to which it can be continuously exposed without damage..

Table 60–5—1000BASE-PX10-D and 1000BASE-PX10-U receive characteristics

Description	1000BASE-PX10-D	1000BASE-PX10-U	Unit
Signaling speed (range)	1.25 ± 100 ppm	1.25 ± 100 ppm	GBd
Wavelength (range)	1260 to 1360	1480 to 1500	nm
Bit error ratio (max)	10^{-12}		
Average receive power (max)	–1	–3	dBm
Damage threshold (max)	+4	+2	dBm
Receiver sensitivity (max)	–24	–24	dBm
Receiver sensitivity OMA (max)	–23.2 (5.0)	–23.2 (5.0)	dBm (μW)
Signal detect threshold (min)	–45	– 44	dBm
Receiver reflectance (max)	–12	–12	dB
Stressed receive sensitivity (max)[a]	–22.3	–21.4	dBm
Stressed receive sensitivity OMA (max)	–21.5 (7.0)	–20.7 (8.6)	dBm (μW)
Vertical eye-closure penalty (min)[b]	1.2	2.2	dB
Treceiver_settling[c] (max)	400	N/A	ns
Stressed eye jitter (min)	0.25	0.25	UI pk to pk
Jitter corner frequency	637	637	kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15	0.05, 0.15	UI

[a]The stressed receiver sensitivity is optional.
[b]Vertical eye closure penalty and the jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.
[c]Treceiver_settling is informative. The combined Treceiver_settling and CDR lock time is normative. See 65.3 for CDR lock times.

60.4 PMD to MDI optical specifications for 1000BASE-PX20-D and 1000BASE-PX20-U

The operating range for 1000BASE-PX20 is defined in Table 60–1. A 1000BASE-PX20 compliant transceiver supports all media types listed in Table 60–14 according to the specifications described in 60.9.2. A transceiver which exceeds the operational range requirement while meeting all other optical specifications

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 352 of 717

is considered compliant (e.g., a single-mode solution operating at 20.5 km meets the minimum range requirement of 0.5 m –20 km for 1000BASE-PX20).

NOTE—The specifications for OMA have been derived from extinction ratio and average launch power (minimum) or receiver sensitivity (maximum). The calculation is explained in 58.7.6.

60.4.1 Transmit optical specifications

The 1000BASE-PX20-D and 1000BASE-PX20-U transmitter's signaling speed, operating wavelength, spectral width, average launch power, extinction ratio, return loss tolerance, OMA, eye and TDP shall meet the specifications defined in Table 60–6 per measurement techniques described in 60.7. Its RIN_{15}OMA should meet the value listed in Table 60–6 per measurement techniques described in 60.7.7.

Table 60–6—1000BASE-PX20-D and 1000BASE-PX20-U transmit characteristics

Description	1000BASE-PX20-D	1000BASE-PX20-U	Unit
Nominal transmitter type[a]	Longwave Laser	Longwave Laser	
Signaling speed (range)	1.25 ± 100 ppm	1.25 ± 100 ppm	GBd
Wavelength[b] (range)	1480 to 1500	1260 to 1360	nm
RMS spectral width (max)	see Table 60–7		nm
Average launch power (max)	+7	+4	dBm
Average launch power (min)	+2	–1	dBm
Average launch power of OFF transmitter (max)	–39	–45	dBm
Extinction ratio (min)	6	6	dB
RIN_{15}OMA (max)	–115	–115	dB/Hz
Launch OMA (min)	2.8 (1.9)	–0.22 (0.95)	dBm (mW)
Transmitter eye mask definition {X1, X2, Y1, Y2, Y3}	{0.22, 0.375, 0.20, 0.20, 0.30}	{0.22, 0.375, 0.20, 0.20, 0.30}	UI
Ton (max)	N.A.	512	ns
Toff (max)	N.A.	512	ns
Optical return loss tolerance (max)	15	15	dB
Optical return loss of ODN (min)	20	20	dB
Transmitter reflectance (max)	–10	–10	dB
Transmitter and dispersion penalty (max)	2.3	1.8	dB
Decision timing offset for transmitter and dispersion penalty (min)	± 0.1	± 0.125	UI

[a]The nominal device type is not intended to be a requirement on the source type, and any device meeting the transmitter characteristics specified may be substituted for the nominal device type.
[b]This represents the range of centre wavelength ±1σ of the rms spectral width.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 353 of 717

The maximum RMS spectral width vs. wavelength for 1000BASE-PX20 is shown in Table 60–7 and for 1000BASE-PX20-U in Figure 60–4. The equation used to generate these values is included in 60.7.2. The central column values are normative, the right hand column is informative.

Table 60–7—1000BASE-PX20-D and 1000BASE-PX20-U transmitter spectral limits

Center Wavelength	RMS spectral width (max) [a]	RMS spectral width to achieve epsilon ε <=0.10 (informative)
nm	nm	nm
1260	**0.72**	0.62
1270	**0.86**	0.75
1280	**1.07**	0.93
1290	**1.40**	1.22
1300	**2.00**	1.74
1304	**2.5**	2.42
1305	**2.55**	2.5
1308	**3.00**	
1317		
1320	**2.53**	2.2
1321	**2.41**	
1330	**1.71**	1.48
1340	**1.29**	1.12
1350	**1.05**	0.91
1360	**0.88**	0.77
1480 to 1500	**0.44**	0.30

[a]These limits for the 1000BASE-PX20-U are illustrated in Figure 60–4. The equation used to calculate these values is detailed in 60.7.2. Limits at intermediate wavelengths may be found by interpolation.

60.4.2 Receiver optical specifications

The 1000BASE-PX20-D and 1000BASE-PX20-U receiver's signaling speed, operating wavelength, overload, sensitivity, reflectivity and signal detect shall meet the specifications defined in Table 60–8 per measurement techniques defined in 60.7.10. Its stressed receive characteristics should meet the values listed in Table 60–8 per measurement techniques described in 60.7.11. Either the damage threshold included in Table 60–8 shall be met, or, the receiver shall be labelled to indicate the maximum optical input power level to which it can be continuously exposed without damage.

60.5 Illustrative 1000BASE-PX10 and 1000BASE-PX20 channels and penalties (informative)

Illustrative power budget for 1000BASE-PX10 and 1000BASE-PX20 channels are shown in Table 60–9.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 354 of 717

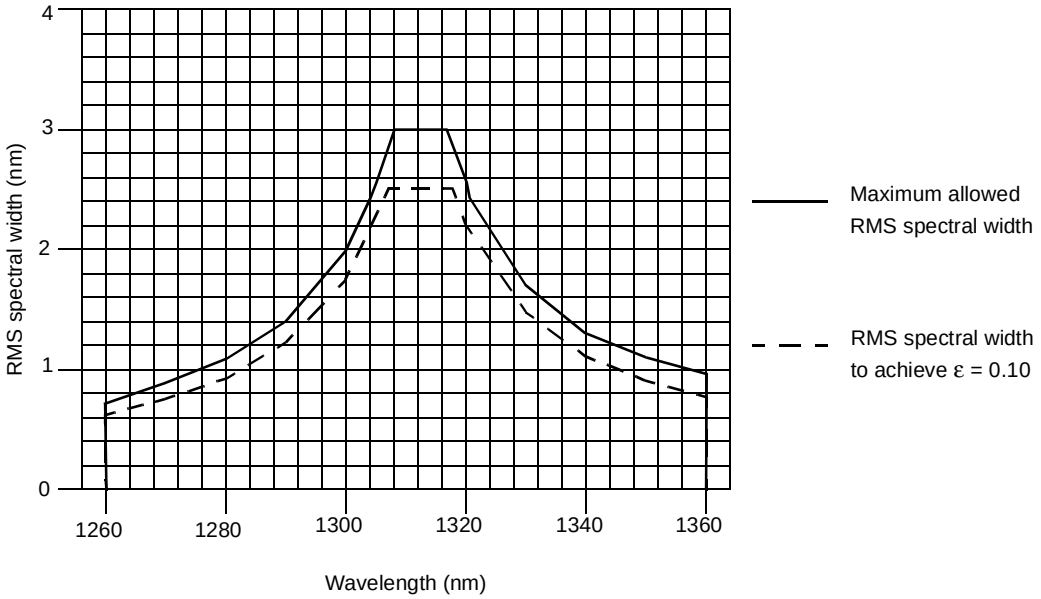


Figure 60–4—1000BASE-PX20-U transmitter spectral limits

Table 60–8—1000BASE-PX20-D and 1000BASE-PX20-U receive characteristics

Description	1000BASE-PX20-D	1000BASE-PX20-U	Unit
Signaling speed (range)	1.25 ± 100 ppm	1.25 ± 100 ppm	GBd
Wavelength (range)	1260 to 1360	1480 to 1500	nm
Bit error ratio (max)	10^{-12}		
Average receive power (max)	–6	–3	dBm
Damage threshold (max)	+4	+7	dBm
Receive sensitivity (max)	–27	–24	dBm
Receiver sensitivity OMA (max)	–26.2 (2.4)	–23.2 (5)	dBm (μW)
Signal detect threshold (min)	– 45	– 44	dBm
Receiver reflectance (max)	–12	–12	dB
Stressed receive sensitivity (max)[a]	–24.4	–22.1	dBm
Stressed receive sensitivity OMA (max)	–23.6 (4.3)	–21.3 (7.4)	dBm (μW)
Vertical eye-closure penalty (min)[b]	2.2	1.5	dB
Treceiver_settling[c] (max)	400	N.A.	ns
Stressed eye jitter (min)	0.28	0.25	UI pk to pk
Jitter corner frequency	637	637	kHz
Sinusoidal jitter limits for stressed receiver conformance test (min, max)	0.05, 0.15	0.05, 0.15	UI

[a]The stressed receiver sensitivity recommendation is optional.
[b]Vertical eye closure penalty and the jitter specifications are test conditions for measuring stressed receiver sensitivity. They are not required characteristics of the receiver.
[c]Treceiver_settling is informative. The combined Treceiver_settling and CDR lock time is normative. See 65.3 for CDR lock times.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 355 of 717

Table 60–9—Illustrative 1000BASE-PX10 and 1000BASE-PX20 channel insertion loss and penalties

Description	1000BASE-PX10		1000BASE-PX20		Units
	Upstream	Downstream	Upstream	Downstream	
Fiber Type	B1.1, B1.3 SMF				
Measurement wavelength for fibre	1310	1550[a]	1310	1550[a]	nm
Nominal distance	10		20		km
Available power budget[b]	23.0	21.0	26.0	26.0	dB
Channel insertion loss (max)[c]	20	19.5	24	23.5	dB
Channel insertion loss (min)[d]	5		10		dB
Allocation for penalties[e]	3	1.5	2	2.5	dB
Optical return loss of ODN (min)	20				dB

[a]The nominal transmit wavelength is 1490 nm.
[b]In an FEC enabled link, when not operating at the dispersion limit, the available power budget is increased by 2.5 dB.
[c]The channel insertion loss is based on the cable attenuation at the target distance and nominal measurement wavelength. The channel insertion loss also includes the loss for connectors, splices and other passive components such as splitters.
[d]The power budgets for PX10 and PX20 links are such that a minimum insertion loss is assumed between transmitter and receiver. This minimum attenuation is required for PMD testing.
[e]The allocation for penalties is the difference between the available power budget and the channel insertion loss; insertion loss difference between nominal and worst case operating wavelength is considered a penalty. This allocation may be used to compensate for transmission related penalties. Further details are given in 60.7.2.

NOTE—The budgets include an allowance for –12 dB reflection at the receiver.

60.6 Jitter at TP1-4 for 1000BASE-PX10 and 1000BASE-PX20 (informative)

The entries in Table 60–10 and Table 60–11 represent high-frequency jitter (above 637 kHz) and do not include low frequency jitter or wander. They are two sided (peak-to-peak) measures. Table 60–10 applies to the downstream direction (D to U) while Table 60–11 applies to the upstream direction (U to D). All values are informative. For the 1000BASE-PX upstream jitter budget, the jitter transfer function is defined by Equation (60-2) where the value is given in Figure 60–5 when input sinusoidal jitter according to the mask defined in 58.7.11.4 and values in Table 60–5 and Table 60–8 are applied to the receiver input of the ONU. Two sets of upstream jitter values are defined in Table 60–11, one set corresponds to testing the upstream link with no jitter on the downstream (jitter generation) and the other set with maximum jitter on the downstream (generated and transfered jitter).

NOTE—Informative jitter values are chosen to be compatible with the limits for eye mask and TDP (see 58.7.9).

Total jitter in this table is defined at 10^{-12} BER. In a commonly used model,

$$TJ = 14.1\sigma + DJ \text{ at } 10^{12} \quad (60\text{-}1)$$

W is similar but not necessarily identical to deterministic jitter (DJ). A jitter measurement procedure is described in 58.7.12. Other jitter measurements are described in 59.7.12 and 59.7.13. Jitter at TP2 or TP3 is defined with a receiver of the same bandwidth as specified for the transmitted eye.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 356 of 717

Table 60–10—1000BASE-PX10 and 1000BASE-PX20 downstream jitter budget (informative)

	Total jitter		Deterministic jitter	
Reference point	**UI**	**ps**	**UI**	**ps**
TP1	0.24	192	0.10	80
TP1 to TP2	0.191	153	0.15	120
TP2	0.431	345	0.25	200
TP2 to TP3	0.009	7	0	0
TP3	0.44	352	0.25	200
TP3 to TP4	0.309	247	0.212	170
TP4	0.749	599	0.462	370

Table 60–11—1000BASE-PX10 and 1000BASE-PX20 upstream jitter budget (informative)

	No Jitter input to ONU				Jitter input to ONU			
	Total jitter		*W*		Total jitter		*W*	
Reference point	**UI**	**ps**	**UI**	**ps**	**UI**	**ps**	**UI**	**ps**
TP1	0.19	152	0.06	48	0.24	192	0.11	88
TP1 to TP2	0.16	128	0.14	112	0.16	128	0.14	112
TP2	0.35	280	0.20	160	0.40	320	0.25	200
TP2 to TP3	0.09	72	0.05	40	0.09	72	0.05	40
TP3	0.44	352	0.25	200	0.49	392	0.30	24
TP3 to TP4	0.18	144	0.15	120	0.18	144	0.15	120
TP4	0.62	496	0.40	320	0.67	536	0.45	360

$$\text{Jitter Transfer} = 20\log_{10}\left[\frac{\text{Jitter on upstream signal (UI)}}{\text{Jitter on downstream signal (UI)}}\right] \quad (60\text{-}2)$$

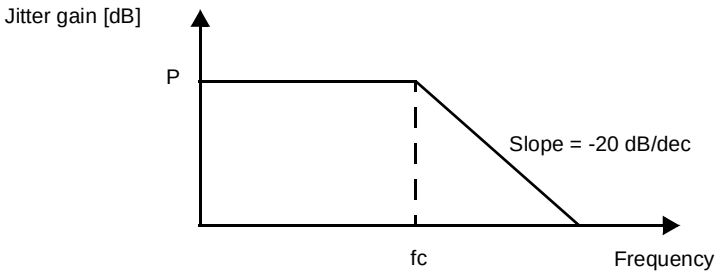


Figure 60–5—Jitter gain curve values for 1000BASE-PX10-U and 1000BASE-PX20-U

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 357 of 717

Table 60–12—Jitter gain curve values for 1000BASE-PX10-U and 1000BASE-PX20-U

	Value	Unit
P	0.3	dB
fc	1274	kHz

60.7 Optical measurement requirements

The following sections describe definitive patterns and test procedures for certain PMDs of this standard. Implementers using alternative verification methods must ensure adequate correlation and allow adequate margin such that specifications are met by reference to the definitive methods. All optical measurements, except TDP and $RIN_{15}OMA$, shall be made through a short patch cable between 2 and 5 m in length.

60.7.1 Frame based test patterns

59.7.1 provides suitable patterns for frame based testing.

NOTE—Users are advised to take care that the system under test is not connected to a network in service.

60.7.2 Wavelength and spectral width measurements

The wavelength and spectral width (RMS) shall meet specifications according to ANSI/EIA/TIA-455-127, under modulated conditions using a valid 1000BASE-X signal.

NOTES

1—The allowable range of central wavelengths is narrower than the operating wavelength range by the actual RMS spectral width at each extreme.

2—The 20 dB width for SLM lasers is taken as 6.07 times the RMS width.

The interaction between the transmitter and the chromatic dispersion of the fiber is accounted for by a parameter ε (epsilon), which is defined as the product of 10^{-3} times the signaling speed (in GBd) times the path dispersion (in ps/nm) times the RMS spectral width (in nm).

$$\varepsilon = \text{dispersion} \times \text{length} \times \text{RMS spectral width} \times 10^{-3} \quad (60\text{-}3)$$

For the 1000BASE-PX10-D and 1000BASE-PX10-U links, a maximum ε close to 0.168 is imposed by the middle column of Table 60–4. If the spectral width is kept below the limits of the right hand column, ε will not exceed 0.115, and the chromatic dispersion penalty is expected to be below 2 dB when all link parameters are simultaneously at worst case values. For the 1000BASE-PX20-D and 1000BASE-PX20-U links, a maximum ε close to 0.115 is imposed by the middle column of Table 60–7. If the spectral width is kept below the limits of the right hand column, ε will not exceed 0.10, and the chromatic dispersion penalty is expected to be below 1.5 dB when all link parameters are simultaneously at worst case values.

The chromatic dispersion penalty is a component of transmitter and dispersion penalty (TDP) which is specified in Table 60–3, Table 60–6 and described in 58.7.9.

60.7.3 Optical power measurements

Optical power shall meet specifications according to the methods specified in ANSI/EIA-455-95. A measurement may be made with the port transmitting any valid encoded 8B/10B data stream.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 358 of 717

60.7.4 Extinction ratio measurements

Extinction ratio shall meet specifications according to ANSI/TIA/EIA-526-4A with the port transmitting a repeating idle pattern /I2/ ordered_set (see 36.2.4.12) that may be interspersed with OAM packets per 43B.2, and with minimal back reflections into the transmitter, lower than –20 dB. The /I2/ ordered_set is defined in Clause 36, and is coded as /K28.5/D16.2/ which is binary 001111 1010 100100 0101 within idles. The extinction ratio is expected to be similar for other valid 8B/10B bit streams. The test receiver has the frequency response as specified for the transmitter optical waveform measurement.

60.7.5 OMA measurements (informative)

58.7.5 provides a reference technique for performing OMA measurements.

60.7.6 OMA relationship to extinction ratio and power measurements (informative)

The normative way of measuring transmitter characteristics is extinction ratio and mean power. Clause 58 provides information on how OMA, extinction ratio and mean power are related to each other (see 58.7.6).

60.7.7 Relative intensity noise optical modulation amplitude ($RIN_{15}OMA$)

$RIN_{15}OMA$ is the ratio of noise to modulated optical signal in the presence of a back reflection. The measurement procedure is described in 58.7.7.

60.7.8 Transmitter optical waveform (transmit eye)

The required transmitter pulse shape characteristics are specified in the form of a mask of the transmitter eye diagram as shown in Figure 60–6.

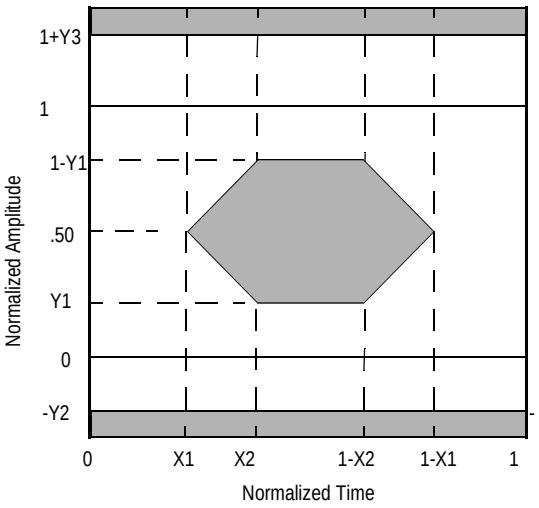


Figure 60–6—Transmitter eye mask definition

The measurement procedure is described in 58.7.8 and references therein.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 359 of 717

The eye shall comply to the mask of the eye using a fourth-order Bessel-Thomson receiver response with *fr* = 0.9375 GHz, and where the relative response vs. relative frequency is defined in ITU-T G.957, Table B.2 (STM-16 values), along with the allowed tolerances for its physical implementation.

NOTES

1—This Bessel-Thomson filter is not intended to represent the noise filter used within an optical receiver, but is intended to provide uniform measurement conditions on the transmitter.

2—The fourth order Bessel-Thomson filter is reactive. In order to suppress reflections, a 6 dB attenuator may be required at the filter input and/or output.

59.7.9 Transmitter and dispersion penalty (TDP)

TDP measurement tests for transmitter impairments with chromatic effects for a transmitter to be used with single mode fiber. Possible causes of impairment include intersymbol interference, jitter, RIN and mode partition noise. Meeting the separate requirements (e.g. eye mask, spectral characteristics) does not in itself guarantee the transmitter and dispersion penalty (TDP). The TDP limit shall be met. See 58.7.9 for details of the measurement.

60.7.10 Receive sensitivity measurement

Receiver sensitivity is defined for the random pattern test frame and an ideal input signal quality with the specified extinction ratio. The measurement procedure is described in 58.7.10. The sensitivity shall be met for the bit error ratio defined in Table 60–5 or Table 60–8 as appropriate.

60.7.11 Stressed receive conformance test

The stressed receiver conformance test is intended to screen against receivers with poor frequency response or timing characteristics which could cause errors when combined with a distorted but compliant signal at TP3. Modal (MMF) or chromatic (SMF) dispersion can cause distortion. The conformance test signal uses the random pattern test frame and is conditioned by applying deterministic jitter and intersymbol interference. If the option for stressed receiver compliance is chosen, the receiver shall meet the specified bit error ratio at the power level and signal quality defined in Table 60–5 and Table 60–8 as appropriate, according to the measurement procedures of 58.7.11.

60.7.12 Jitter measurements (informative)

Jitter measurements for 1000 Mb/s are described in 58.7.12.

60.7.13 Other measurements

60.7.13.1 Laser On/Off timing measurement

Ton is defined in section 60.7.13.1.1, value is less than 512 ns (defined in Table 60–3 and Table 60–6).

Treceiver_settling is defined in section 60.7.13.2.1 (informative), value is less than 400 ns (defined in Table 60–5 and Table 60–8).

Tcdr is defined in section 65.3.2.1 value is less than 400 ns (defined in 60.2.2).

Tcode_group_align is defined in section 36.3.2.4 value is less than 4 octets.

Toff is defined in section 60.7.13.1.1, value is less than 512 ns (defined in Table 60–3 and Table 60–6).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 360 of 717

60.7.13.1.1 Definitions

Denote Ton as the time beginning from the falling edge of the Tx_Enable line to the ONU PMD and ending at the time that the optical signal at TP2 of the ONU PMD is within 15% of its steady state parameters (average launched power, wavelength, RMS spectral width, transmitter and dispersion penalty, optical return loss tolerance, jitter, $RIN_{15}OMA$, extinction ratio and eye mask opening) as defined in Table 60–3 for 1000BASE-PX10-U and Table 60–6 for 1000BASE-PX20-U. Ton is presented in Figure 60–7. The data transmitted may be any valid 8B/10B symbols.

Denote Toff as the time beginning from the rising edge of the Tx_Enable line to the ONU PMD and ending at the time that the optical signal at TP2 of the ONU PMD reaches the specified average launch power of off transmitter as defined in Table 60–3 for 1000BASE-PX10-U and Table 60–6 for 1000BASE-PX20-U. Toff is presented in Figure 60–7. The data transmitted may be any valid 8B/10B symbols.

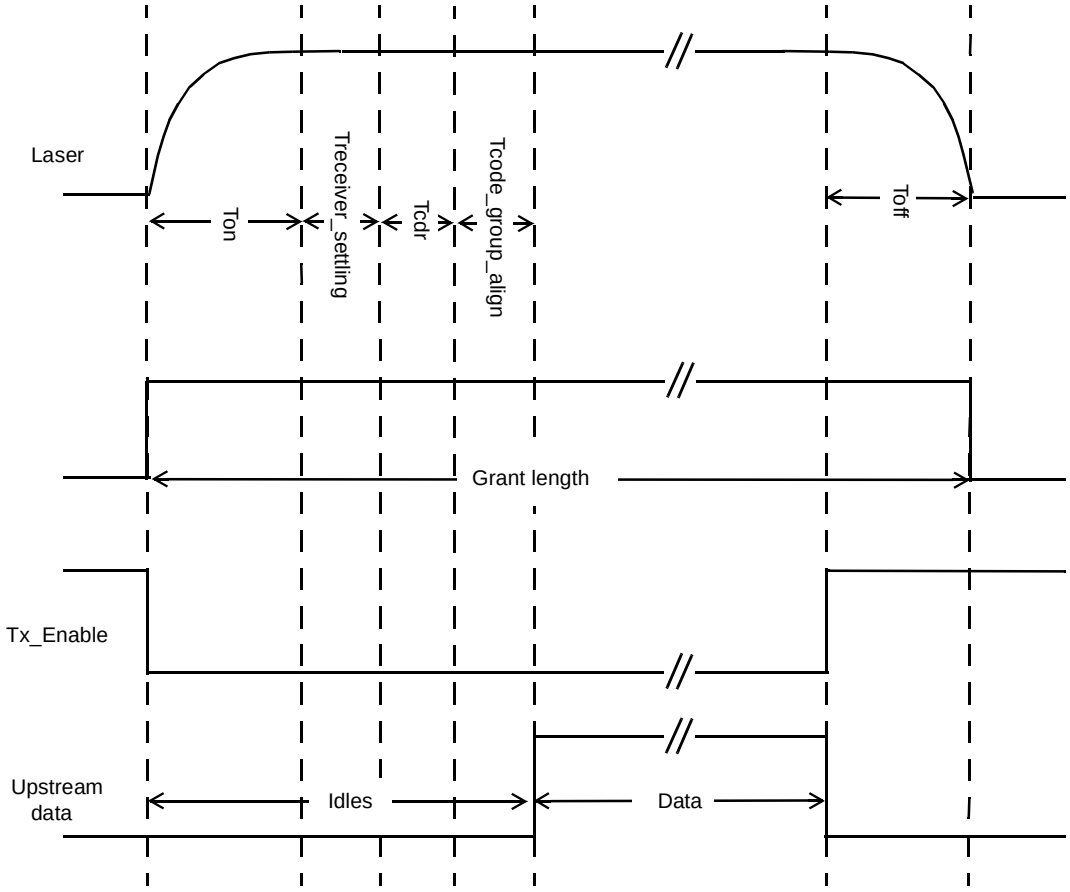


Figure 60–7—P2MP timing parameter definition

60.7.13.1.2 Test specification

The test setup for measuring Ton and Toff is described in Figure 60–8. An O/E converter is used to convert the optical signal at TP3 to an electrical signal at TP4 where it is assumed that the response time of the converter is considerably shorter that the Ton value under measurement. A scope, with a variable delay, can measure the time from the Tx_Enable trigger to the time the optical signal reaches all its specified conditions. The delay to the scope trigger is adjusted until the point that the received signal meets all its specified conditions. This is the Ton in question.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 361 of 717

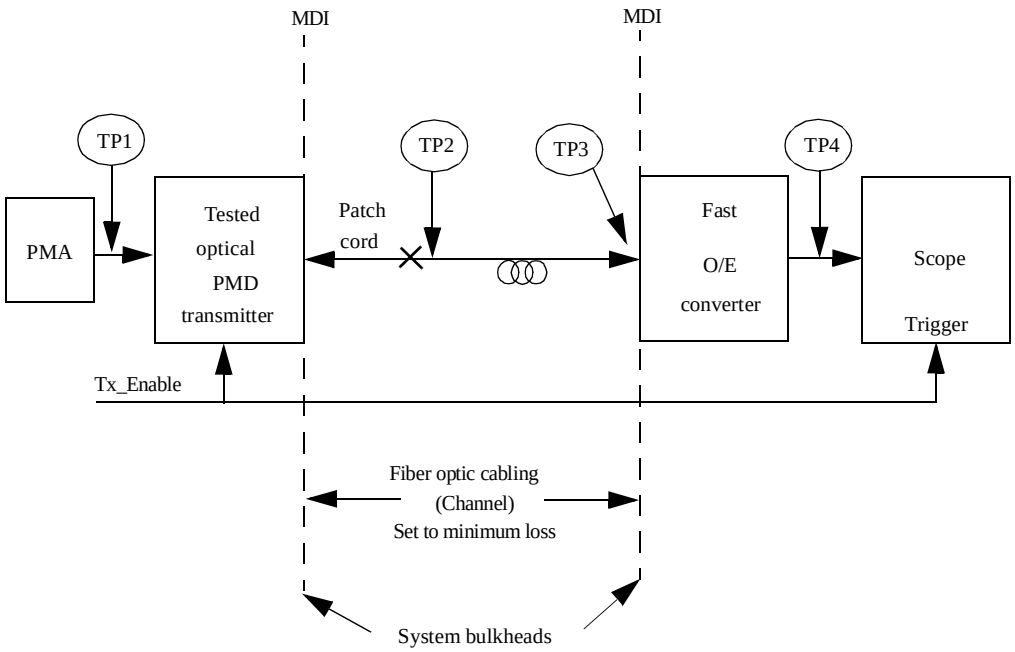


Figure 60–8—ONU PMD Laser on/off time measurement setup

A non-rigorous way to describe this test setup would be: for a PMD with a declared Ton and Toff, measure all PMD optical parameter after Ton and Toff from the Tx_Enable trigger, reassuring conformance 15% of the steady state values. Notice that only the steady state optical OFF power must be conformed when measuring Toff time, since that is the only relevant parameter.

60.7.13.2 Receiver settling timing measurement (informative)

60.7.13.2.1 Definitions

Denote Treceiver_settling as the time beginning from the time that the optical power in the receiver at TP3 reaches the conditions specified in 38.6.11, 58.7.11.2 and ending at the time that the electrical signal after the PMD at TP4, reaches within 15% of its steady state parameter, (average power, jitter), see Table 60–5 and Table 60–8. Treceiver_settling is presented in Figure 60–7. The data transmitted may be any valid 8B/10B symbols (or a specific power synchronization sequence). The optical signal at TP3, at the beginning of the locking, may have any valid 8B/10B pattern, optical power level, jitter, or frequency shift matching the standard specifications.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 362 of 717

60.7.13.2.2 Test specification

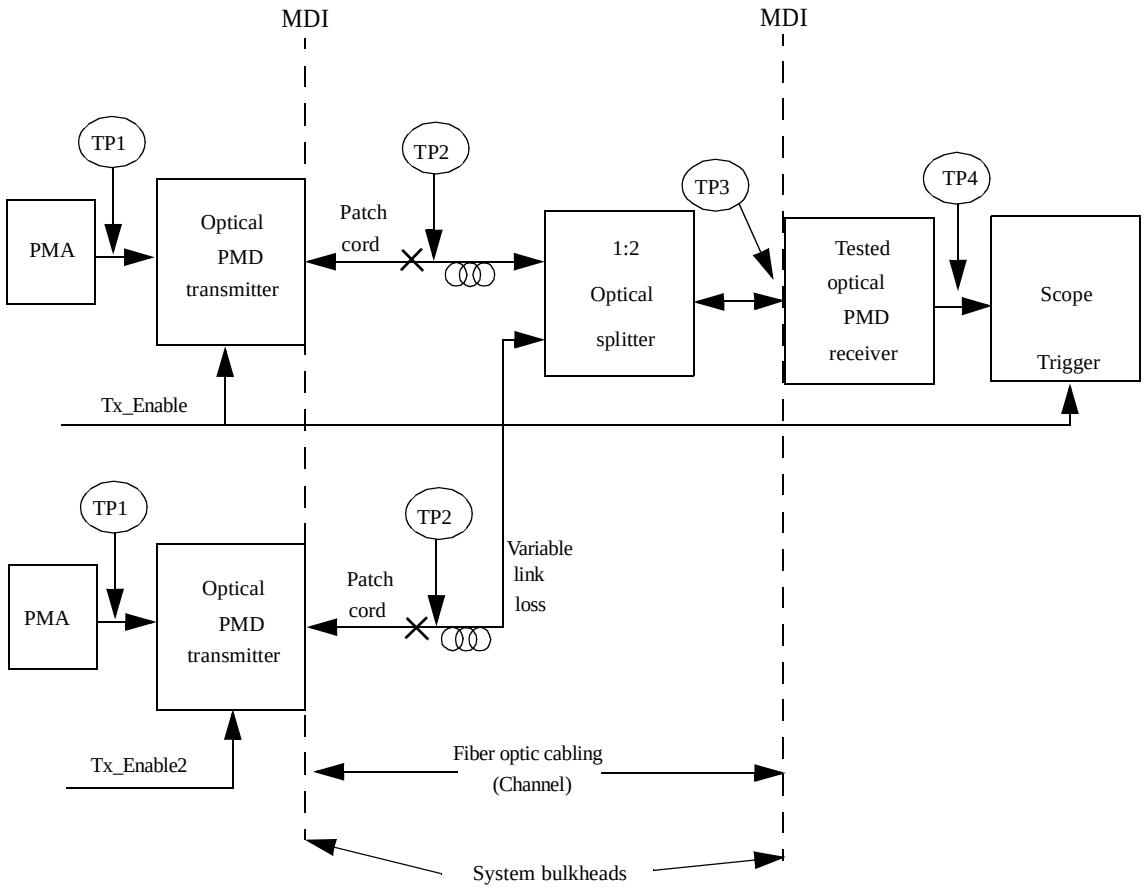


Figure 60–9—Receiver settling time measurement setup

Figure 60–9 illustrates the tests setup for the OLT PMD receiver (upstream) Treceiver_settling time. The optical PMD transmitter has well known parameters, with a fixed known Ton time. After Ton time the parameters of the reference transmitter, at TP2 and therefore at TP3, reach within 15% of its steady state values as specified in Table 60–3 for 1000BASE-PX10-U and Table 60–6 for 1000BASE-PX20-U.

Define Treceiver_settling time as the time from the Tx_Enable assertion, minus the known Ton time, to the time the electrical signal at TP4 reaches within 15% of its steady state conditions.

Conformance should be assured for an optical signal at TP3 with any level of its specified parameters before the Tx_Enable assertion. Especially the Treceiver_settling time must be met in the following scenarios:

— Switching from a ‘weak’ (minimal received power at TP3) ONU to a ‘strong’ (maximal received power at TP3) ONU, with minimal guard band between.
— Switching from a ‘strong’ ONU to a ‘weak’ ONU, with minimal guard band between.
— Switching from noise level, with maximal duration interval, to ‘strong’ ONU power level.

A non-rigorous way to describe this test setup would be (using a transmitter with a known Ton).

For a tested PMD receiver with a declared Treceiver_settling time, measure all PMD receiver electrical parameters at TP4 after Treceiver_settling from the TX_ENABLE trigger minus the reference transmitter Ton, reassuring conformance to within 15% of its specified steady state values.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 363 of 717

60.8 Environmental, safety, and labeling

60.8.1 General safety

All equipment meeting this standard shall conform to IEC 60950.

60.8.2 Laser safety

1000BASE-PX10 and 1000BASE-PX20 optical transceivers shall conform to Class 1 laser requirements as defined in IEC 60825-1, under any condition of operation. This includes single fault conditions whether coupled into a fiber or out of an open bore. Conformance to additional laser safety standards may be required for operation within specific geographic regions.

Laser safety standards and regulations require that the manufacturer of a laser product provide information about the product's laser, safety features, labeling, use, maintenance and service. This documentation shall explicitly define requirements and usage restrictions on the host system necessary to meet these safety certifications.

60.8.3 Installation

It is recommended that proper installation practices, as defined by applicable local codes and regulation, be followed in every instance in which such practices are applicable.

60.8.4 Environment

Reference Annex 67A for additional environmental information.

Two optional temperature ranges are defined in Table 60–13. Implementations shall be declared as compliant over one or both complete ranges, or not so declared (compliant over parts of these ranges or another temperature range).

Table 60–13—Component case temperature classes

Class	Low temperature (°C)	High temperature (°C)
Warm extended	–5	+85
Cool extended	–40	+60
Universal extended	–40	+85

60.8.5 PMD labelling requirements

It is recommended that each PHY (and supporting documentation) be labeled in a manner visible to the user, with at least the applicable safety warnings and the applicable port type designation (e.g., 1000BASE-PX10-U).

Labeling requirements for Class 1 lasers are given in the laser safety standards referenced in 60.8.2.

Each systems and field pluggable component shall be clearly labeled with its operating temperature range over which their compliance is ensured.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 364 of 717

60.9 Characteristics of the fiber optic cabling

The 1000BASE-PX fiber optic cabling shall meet the dispersion specifications defined in IEC 60793-2 and ITU-T G.652, as shown in Table 60–14. The fiber optic cabling consists of one or more sections of fiber optic cable and any intermediate connections required to connect sections together. It also includes a connector plug at each end to connect to the MDI. The fiber optic cabling spans from one MDI to another MDI, as shown in Figure 60–10.

60.9.1 Fiber optic cabling model

The fiber optic cabling model is shown in Figure 60–10.

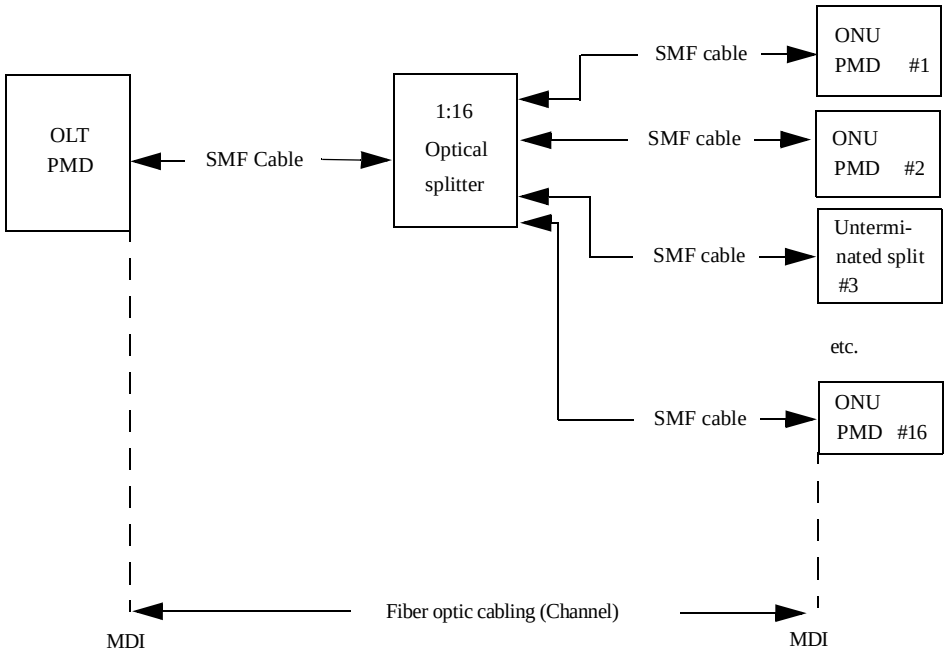


Figure 60–10—Fiber optic cable model

NOTE—The 1:16 optical splitter may be replaced by a number of smaller 1:n splitters such that a different topology may be implemented while preserving the link characteristics and power budget as defined in Table 60–9.

The maximum channel insertion losses shall meet the requirements specified in Table 60–1. Insertion loss measurements of installed fiber cables are made in accordance with ANSI/TIA/EIA-526-7 [B15], method A-1. The fiber optic cabling model (channel) defined here is the same as a simplex fiber optic link segment. The term channel is used here for consistency with generic cabling standards.

60.9.2 Optical fiber and cable

The fiber optic cable requirements are satisfied by the fibers specified in IEC 60793-2 Type B1.1 (dispersion un-shifted single-mode fiber) and Type B1.3 (low water peak single-mode fiber) and ITU G.652 as noted in Table 60–14.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 365 of 717

60.9.3 Optical fiber connection

Table 60–14—Optical fiber and cable characteristics

Description[a]	Type B1.1, B1.3 SMF		Unit
Nominal wavelength[b]	1310	1550	nm
Cable attenuation (max)[c]	0.4	0.35	dB/km
Zero dispersion wavelength[d]	$1300 \leq \lambda_0 \leq 1324$		nm
Dispersion slope (max)	0.093		ps / $nm^2 \cdot km$

[a]The fiber dispersion values are normative, all other values in the table are informative.
[b]Wavelength specified is the nominal wavelength and typical measurement wavelength. Power penalties at other wavelengths are accounted for.
[c]Attenuation for single-mode optical fiber cables is defined in ITU-T G.652.
[d]See IEC 60793 or G.652 ITU-T.

An optical fiber connection as shown in Figure 60–10 consists of a mated pair of optical connectors. The 1000BASE-PX is coupled to the fiber optic cabling through an optical connection and any optical splitters into the MDI optical receiver, as shown in Figure 60–10. The channel insertion loss includes the loss for connectors, splices and other passive components such as splitters, see Table 60–9.

The link attenuations have been calculated on the assumption of 14.5 dB for a 16:1 splitter; 3.5, 4, 7.5, or 8 dB (at the appropriate measurement wavelength where these attenuations are a combination of the minimum range given in Table 60–1 and the values in Table 60–14) for fiber cable attenuation and 1.5 dB for connectors and splices. For example, this allocation supports three connections with an average insertion loss equal to 0.5 dB (or less) per connection, or two connections with a maximum insertion loss of 0.75 dB. Other arrangements, such as a shorter link length and a higher split ratio in the case of 1000BASE-PX20, may be used provided the requirements of Table 60–1 are met.

The maximum discrete reflectance for single-mode connections shall be less than –26 dB.

60.9.4 Medium Dependent Interface (MDI)

The 1000BASE-PX10 or 1000BASE-PX20 PMD is coupled to the fiber cabling at the MDI. The MDI is the interface between the PMD and the “fiber optic cabling” as shown in Figure 60–10. Examples of an MDI include:

a) Connectorized fiber pigtail
b) PMD receptacle

When the MDI is a remateable connection, it shall meet the interface performance specifications of IEC 61753-1. The MDI carries the signal in both directions for 1000BASE-PX10 and 1000BASE-PX20 and couples to a single fiber.

NOTE—Compliance testing is performed at TP2 and TP3 as defined in 60.2.1, not at the MDI.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 366 of 717

60.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 60, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks)[9]

60.10.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 60, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks), shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

60.10.2 Identification

60.10.2.1 Implementation identification

Supplier[1]	
Contact point for enquiries about the PICS[1]	
Implementation Name(s) and Version(s)[1,3]	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Name(s)[2]	
NOTES 1—Required for all implementations. 2—May be completed as appropriate in meeting the requirements for the identification. 3—The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

60.10.2.2 Protocol Summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Clause 60, Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	

Date of Statement	

[9]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 367 of 717

60.10.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
HT	High temperature operation	60.8.4	–5 to 85 °C	O	Yes [ ] No [ ]
LT	Low temperature operation	60.8.4	–40 to 60 °C	O	Yes [ ] No [ ]
*PX10U	1000BASE-PX10-D or 1000BASE-PX10-U PMD	60.2	Device supports 10 km	O/1	Yes [ ] No [ ]
*PX10D	1000BASE-PX10-D or 1000BASE-PX10-U PMD	60.2	Device supports 10 km	O/1	Yes [ ] No [ ]
*PX20U	1000BASE-PX20-D or 1000BASE-PX20-U PMD	60.3	Device supports 20 km	O/1	Yes [ ] No [ ]
*PX20D	1000BASE-PX20-D or 1000BASE-PX20-U PMD	60.3	Device supports 20 km	O/1	Yes [ ] No [ ]
*INS	Installation / Cable	60.3.1	Items marked with INS include installation practices and cable specifications not applicable to a PHY manufacturer.	O	Yes [ ] No [ ]

60.10.4 PICS proforma tables for Physical Medium Dependent (PMD) sublayer and medium, type 1000BASE-PX10 and 1000BASE-PX20 (long wavelength passive optical networks)

60.10.4.1 PMD functional specifications

Item	Feature	Subclause	Value/Comment	Status	Support
FN1	Transmit function	60.2.2	Conveys bits from PMD service interface to MDI	M	Yes [ ]
FN2	Transmitter optical signal	60.2.2	Higher optical power transmitted is a logic 1	M	Yes [ ]
FN3	Receive function	60.2.3	Conveys bits from MDI to PMD service interface	M	Yes [ ]
FN4	Receiver optical signal	60.2.3	Higher optical power received is a logic 1	M	Yes [ ]
FN5	Signal detect function (down-stream)	60.2.4.1	Mapping to PMD service interface	M	Yes [ ]
FN6	Signal detect parameter (down-stream)	60.2.4.1	Generated according to Table 60–2	M	Yes [ ]
FN7	Signal detect function (upstream)	60.2.4.2	Mapping to PMD service interface	O/2	Yes [ ]
FN7	Signal detect function (upstream)	60.2.4.2	Provided by higher layer	O/2	Yes [ ]
FN8	Signal detect parameter (upstream)	60.2.4.1	Generated according to Table 60–2	O	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 368 of 717

60.10.4.2 PMD to MDI optical specifications for 1000BASE-PX10-D

Item	Feature	Subclause	Value/Comment	Status	Support
PX10D1	1000BASE-PX10-D transmitter	60.3.1	Meets specifications in Table 60–3	PX10D: M	Yes [ ] N/A [ ]
PX10D2	1000BASE-PX10-D receiver	60.3.2	Meets specifications in Table 60–5	PX10D: M	Yes [ ] N/A [ ]
PX10D3	1000BASE-PX10-D stressed receiver sensitivity	60.3.2	Meets specifications in Table 60–5	PX10D: O	Yes [ ] No [ ] N/A[ ]
PX10D4	1000BASE-PX10-D receiver damage threshold	60.3.2	If the receiver does not meet the damage requirements in Table 60–5 then label accordingly	PX10D: M	Yes [ ] N/A [ ]

60.10.4.3 PMD to MDI optical specifications for 1000BASE-PX10-U

Item	Feature	Subclause	Value/Comment	Status	Support
PX10U1	1000BASE-PX10-U transmitter	60.3.1	Meets specifications in Table 60–3	PX10U: M	Yes [ ] N/A [ ]
PX10U2	1000BASE-PX10-U receiver	60.3.2	Meets specifications in Table 60–5	PX10U: M	Yes [ ] N/A [ ]
PX10U3	1000BASE-PX10-U stressed receiver sensitivity	60.3.2	Meets specifications in Table 60–5	PX10U: O	Yes [ ] No [ ] N/A[ ]
PX10U4	1000BASE-PX10-U receiver damage threshold	60.3.2	If the receiver does not meet the damage requirements in Table 60–5 then label accordingly	PX10U: M	Yes [ ] N/A [ ]

60.10.4.4 PMD to MDI optical specifications for 1000BASE-PX20-D

Item	Feature	Subclause	Value/Comment	Status	Support
PX20D1	1000BASE-PX20-D trans-mitter	60.4.1	Meets specifications in Table 60–6	PX20D: M	Yes [ ] N/A [ ]
PX20D2	1000BASE-PX20-D receiver	60.4.2	Meets specifications in Table 60–8	PX20D: M	Yes [ ] N/A [ ]
PX20D3	1000BASE-PX20-D stressed receiver sensitivity	60.4.2	Meets specifications in Table 60–8	PX20D: O	Yes[ ] No [ ] N/A[ ]
PX20D4	1000BASE-PX20-D receiver damage threshold	60.4.2	If the receiver does not meet the damage requirements in Table 60–8 then label accordingly	PX20D: M	Yes [ ] N/A [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 369 of 717

60.10.4.5 PMD to MDI optical specifications for 1000BASE-PX20-U

Item	Feature	Subclause	Value/Comment	Status	Support
PX20U1	1000BASE-PX20-U transmitter	60.4.1	Meets specifications in Table 60–6	PX20U: M	Yes [ ] N/A [ ]
PX20U2	1000BASE-PX20-D receiver	60.4.2	Meets specifications in Table 60–8	PX20U: M	Yes [ ] N/A [ ]
PX20U3	1000BASE-PX20-U stressed receiver sensitivity	60.4.2	Meets specifications in Table 60–8	PX20U: O	Yes[ ] No [ ] N/A[ ]
PX20U4	1000BASE-PX20-U receiver damage threshold	60.4.2	If the receiver does not meet the damage requirements in Table 60–8 then label accordingly	PX20U: M	Yes [ ] N/A [ ]

60.10.4.6 Optical measurement requirements

Item	Feature	Subclause	Value/Comment	Status	Support
OM1	Measurement cable	60.7	2 to 5 meters in length	M	Yes [ ]
OM2	Wavelength and spectral width measurement	60.7.2	Per TIA/EIA-455-127 under modulated conditions	M	Yes [ ]
OM3	Average optical power	60.7.3	Per TIA/EIA-455-95	M	Yes [ ]
OM4	Extinction ratio	60.7.4	Per ANSI/TIA/EIA-526-4A with minimal back reflections and fourth-order Bessel-Thomson receiver	M	Yes [ ]
OM5	$RIN_{15}OMA$	60.7.7	As described in 58.8.7	M	Yes [ ]
OM6	Transmit optical waveform (transmit eye)	60.7.8	Per ANSI/TIA/EIA-526-4A with test pattern and fourth-order Bessel-Thomson receiver	M	Yes [ ]
OM7	Transmitter and dispersion penalty measurements	59.7.9	As described in 58.7.9	M	Yes [ ]
OM8	Receive sensitivity	60.7.10	With specified pattern	M	Yes [ ]
*OM9	Stressed receiver conformance test	60.7.11	As described in 60.7.11	O	Yes[ ] N/A[ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 370 of 717

60.10.4.7 Characteristics of the fiber optic cabling and MDI

Item	Feature	Subclause	Value/Comment	Status	Support
FO1	Fiber optic cabling	60.9	Specified in Table 60–14	INS:M	Yes [ ] N/A[ ]
F02	End -to-end channel loss	60.9	Meeting the requirements of Table 60–1	INS:M	Yes [ ] N/A[ ]
FO3	Maximum discrete reflectance - single mode fiber	60.9.2	Less than –26 dB	INS:M	Yes [ ] N/A [ ]
FO4	MDI requirements	60.9.4	Meet the interface performance specifications of IEC 61753-1, if remateable	INS:O	Yes [ ] No [ ] N/A [ ]

60.10.4.8 Environmental specifications

Item	Feature	Subclause	Value/Comment	Status	Support
ES1	General safety	60.8.1	Conforms to IEC-60950	M	Yes [ ]
ES2	Laser safety —IEC Class 1	60.8.2	Conform to Class 1 laser requirements defined in IEC 60825-1	M	Yes [ ]
ES3	Documentation	60.8.2	Explicitly defines requirements and usage restrictions to meet safety certifications	M	Yes [ ]
ES4	Operating temperature range labelling	60.8.5	If required	M	Yes [ ] N/A[ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 371 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 372 of 717

61. Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications, type 10PASS-TS and type 2BASE-TL

61.1 Overview

This clause specifies the Physical Coding Sublayer (PCS), Transmission Convergence sublayer (TC), and handshaking mechanisms that are common to a family of Physical Layer implementations for Ethernet over voice-grade copper known as 10PASS-TS and 2BASE-TL. These PHYs deliver a minimum of 10 Mb/s over distances of up to 750 m, and a minimum of 2 Mb/s over distances of up to 2700 m, using a single copper pair. Optionally, transmission over multiple copper pairs is supported.

The copper category of EFM PHYs is based on Digital Subscriber Line (DSL) PMDs defined for use in the access network according to ATIS T1, ETSI, and ITU-T standards. These systems are intended to be used in public as well as private networks; therefore they shall be capable of compliance with appropriate regulatory, governmental and regional requirements.

Unlike the specified copper categories for 10BASE-T, 100BASE-T and 1000BASE-T, existing common carrier voice-grade copper has channel characteristics that are very diverse. Therefore it is conventional to discuss the channel behaviour only in terms of averages, standard deviations and percentage worst case.

The 10PASS-TS and 2BASE-TL EFM Copper PHYs, in conjunction with the MAC specified in Clause 4 and Annex 4A, are used for point-to-point communications on a subscriber access network, typically between centralized distribution equipment, such as a Central Office (CO), and equipment located at the subscriber premises [Customer Premises Equipment, (CPE)].

For the 10PASS-TS and 2BASE-TL EFM Copper PHYs, two subtypes are defined: 10PASS-TS-O and 10PASS-TS-R are the subtypes of 10PASS-TS; 2BASE-TL-O and 2BASE-TL-R are the subtypes of 2BASE-TL. A connection can only be established between a 10PASS-TS-O PHY on one end of the voice-grade copper line, and a 10PASS-TS-R PHY on the other end, or between a 2BASE-TL-O PHY on one end and a 2BASE-TL-R PHY on the other end. In public networks, a 10PASS-TS-O or 2BASE-TL-O PHY is used at a CO, a cabinet or other centralized distribution point; a 10PASS-TS-R or 2BASE-TL-R PHY is used as CPE. In private networks, the network administrator will designate one end of each link as the network end. In this clause, 10PASS-TS-O and 2BASE-TL-O are collectively referred to as “CO-subtypes”; 10PASS-TS-R and 2BASE-TL-R are collectively referred to as “CPE-subtypes”. The CO and CPE subtypes of a 10PASS-TS or 2BASE-TL PHY may be implemented in a single physical device.

10PASS-TS and 2BASE-TL PHYs don’t provide support for unidirectional links as described in 57.2.12. If a particular anomaly or failure occurs in either downstream or upstream, sublayer-specific signaling will alert the remote end of this condition. In the case of a sustained anomaly or failure, the link will reinitialize.

61.1.1 Scope

This clause defines the Physical Coding Sublayer (PCS) and Transmission Convergence sublayer (TC) for 2BASE-TL and 10PASS-TS. The PCS has similarities to other 802.3 PCS types, but also differs since new sublayers are added within the PCS sublayer to accommodate the operation of Ethernet over access network copper channels. The TC contains additional functions specific to the EFM Copper PHYs. This clause also defines the common startup and handshaking mechanism used by both PHYs. Parts of register 3.0, parts of register 3.4, and registers 3.60 through 3.73 specified in Clause 45 may be used to control the PCS specified in this clause. The remaining PCS registers defined in Clause 45 do not have any effect on the PCS specified in this clause. Parts of register 6.0 and registers 6.16 through 6.23 specified in Clause 45 may be used to control the TC sublayer specified in this clause.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 373 of 717

61.1.2 Objectives

The following are the objectives for 2BASE-TL and 10PASS-TS:

a) To provide 100 Mb/s burst data rate at the MII using Rate Matching.
b) To provide support for simultaneous transmission and reception without interference.
c) To provide for operating over unshielded voice grade twisted pair cable.
d) To provide a communication channel with a mean BER at the PMA service interface of less than 10^{-7} with a noise margin of 6dB (10PASS-TS) or 5dB (2BASE-TL).
e) To provide optional support for operation on multiple pairs.
f) To provide functional layering in the PCS which ensures compatibility with the layering and frame interfaces for xDSL systems, including a γ-interface based on that used for the PTM-TC sublayer as defined in ITU-T Recommendation G.993.1.

61.1.3 Relation of 2BASE-TL and 10PASS-TS to other standards

The relation of 2BASE-TL and 10PASS-TS to other standards is shown schematically in Figure 61–1.

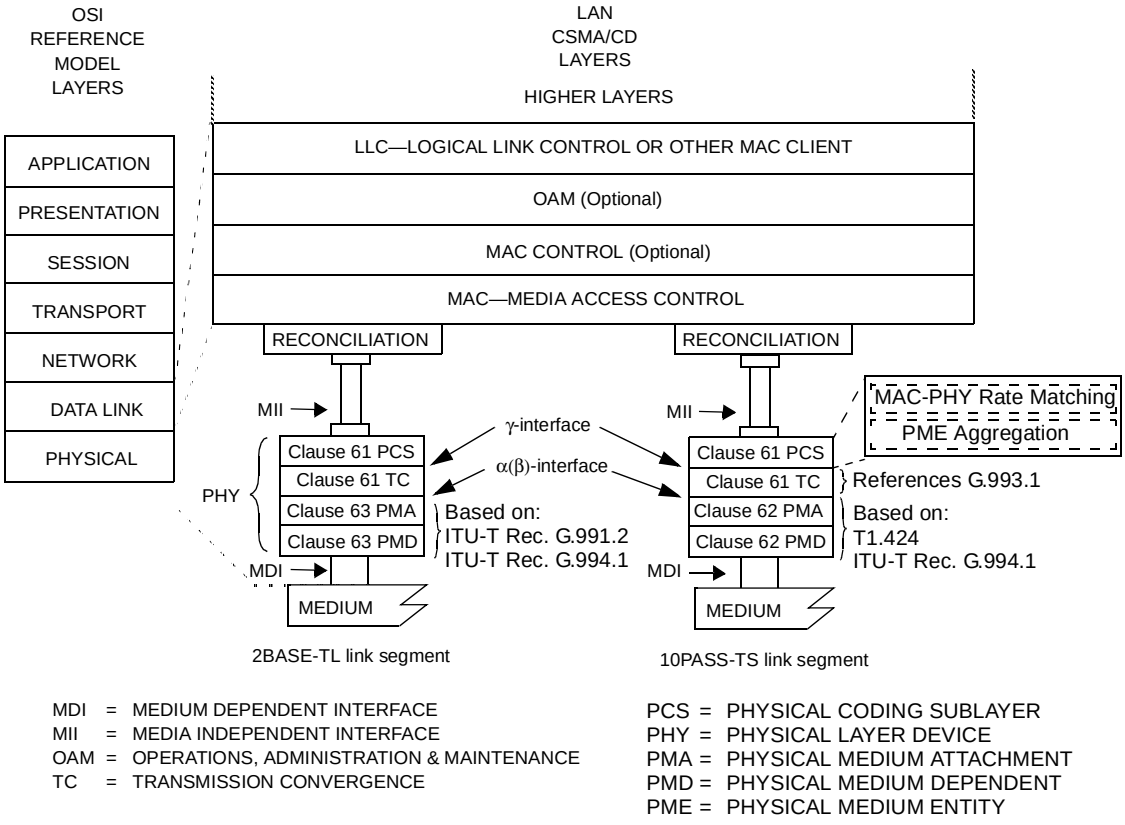


Figure 61–1—Relation of this clause to other standards

NOTE—The PCS shown in the 2BASE-TL PHY and the PCS shown in the 10PASS-TS PHY are two instances of one unique PCS, specified in this Clause. The TC shown in the 2BASE-TL PHY and the TC shown in the 10PASS-TS PHY are two instances of one unique TC, specified in this Clause.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 374 of 717

61.1.4 Summary

61.1.4.1 Summary of Physical Coding Sublayer (PCS) specification

The Physical Coding Sublayer (PCS) for 2BASE-TL and 10PASS-TS contains two functions: MAC-PHY rate matching and PME aggregation. The functional position of the PCS is shown in Figure 61–2.

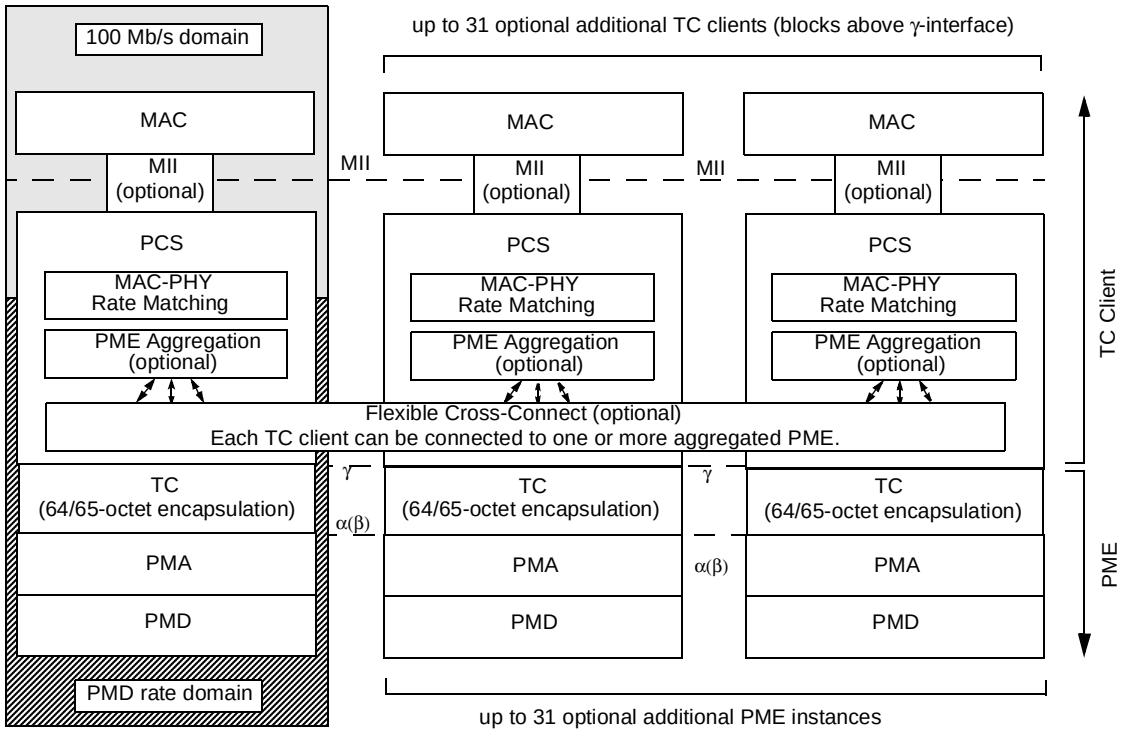


Figure 61–2—Overview of PCS functions

The γ-interface and α(β)-interface are specified in 61.3.1 and 61.3.2, respectively. They are generic interfaces used in various xDSL specifications, such as the ones referenced in Clause 62 and Clause 63. The α(β)-interface is a simple octet-synchronous data interface; the γ-interface adds protocol-awareness (in the case of the TC sublayer defined in this Clause, the γ-interface can signal packet boundaries).

The bit rates in the shaded area labeled "PMD rate domain" are derived from the DSL bit rates. Data is transferred across the γ-interface at the rate imposed by the lower layers. The bit rates in the shaded area labeled "100 Mb/s domain" are synchronous to the MII rate. Data is transferred across the MII at the rate of one nibble per MII clock cycle. The MAC-PHY rate matching function adjusts the inter packet gap so that the net data rate across these interface matches the sum of rates across the γ-interfaces.[10]

In the transmit direction, frames are transferred from the MAC to the PCS across the MII when the MAC-PHY rate matching function allows this. In the PCS, preamble and SFD octets are removed. If the optional PME aggregation function (PAF) is present, the data frame is fragmented by the PAF, and fragments are forwarded, optionally through a flexible cross-connect, towards each of the aggregated Physical Medium Entity (PME) instances via their γ-interfaces. If the PAF is not present, the data frame is forwarded to the TC sublayer via the γ-interface. The TC sublayer accepts data from the MAC-PHY rate matching function or the PAF, at the rate at which it can be processed by the TC sublayer, by asserting Tx_Enbl on the γ-interface.

[10]Bit rate domains and physical clock domains don't necessarily coincide. The TC sublayer receives a clock signal from the PMA via the α(β)-interface, and a clock signal from the optional PAF or the MAC-PHY Rate Matching function via the γ-interface. The TC provides matching between these two clock domains.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 375 of 717

In the receive direction the TC sublayer pushes data to the PAF (if present) or the MAC-PHY rate matching function by asserting Rx_Enbl on the γ-interface. If multiple links are aggregated, the PAF reassembles the received fragments into data frames. Preamble and SFD octets are generated and prepended to the data frame prior to passing it up to the MAC across the MII. The MAC-PHY Rate Matching function may delay the transfer of the frame to avoid simultaneous transfer of Transmit and Receive frames if required.

61.1.4.1.1 Implementation of Media Independent Interface

10PASS-TS and 2BASE-TL specify the optional use of the MII electrical interface as defined in Clause 22 (see also 61.1.5.2). 10PASS-TS and 2BASE-TL do not utilize the MII management interface as described in 22.2.4. The use of the MDIO interface specified in Clause 45 or an equivalent management interface is recommended.

Notwithstanding the specifications in 22.2.2.9, CRS may be asserted by a full-duplex EFM Copper PHY to reduce the effective MAC rate to that of the PHY.

61.1.4.1.2 Summary of MAC-PHY Rate Matching specification

The 10PASS-TS and 2BASE-TL PCS is specified to work with a MAC operating at 100 Mb/s using the MII as defined in Clause 22. The PCS matches the MAC's rate of data transmission to the transmission data rate of the medium, if slower. This is achieved using deference as defined in Annex 4A.

The MAC transmits data at a rate of 100 Mb/s, which is buffered by the PCS before being transmitted onto the medium. Prior to transmission, the MAC checks the carrierSense variable (mapped from the MII signal CRS), and will not transmit another frame as long as CRS is asserted. In order to prevent the PCS's transmit buffer from overflowing, the PCS keeps CRS asserted until it has space to receive a maximum length frame. The PCS forces COL to logic zero to prevent the MAC from dropping the frame and performing a re-transmission.

The transmitter MAC-PHY Rate Matching function strips the Preamble and SFD fields from the MAC frame, and forwards the resulting data frame to the PME Aggregation Function or to the TC sublayer.

For reception the PHY buffers a complete frame, prepends the Preamble and SFD fields, and sends it to the MAC at 100 Mb/s.

It is recognized that some MAC implementations have to be configured for half duplex operation to support deference (according to 4.2.3.2.1), and that these may not allow the simultaneous transmission and reception of data while operating in half duplex mode. To permit operation with these MACs the PHY has an operating mode where MAC data transmission is deferred using CRS when received data is sent from the PHY to the MAC. This mode of operation is defined in Figure 61–8 which describes the MAC-PHY rate matching receive state machine. This state machine gives receive frames priority over transmitted frames to ensure the receive buffer does not overflow.

The definition of MAC-PHY rate matching is presented in 61.2.1.

61.1.4.1.3 Summary of PME Aggregation specification

An optional PME Aggregation Function (PAF) allows one or more PMEs to be combined together to form a single logical Ethernet link. The PAF is located in the PCS, between the MAC-PHY Rate Matching function and the TC sublayer. It interfaces with the PMEs across the γ-interface, and to the MAC-PHY Rate Matching function using an abstract interface. The definition of the PAF is presented in 61.2.2.

61.1.4.1.4 Overview of management

Ethernet OAM (Clause 57) runs over a MAC service which uses a PHY consisting of either a single physical link, or more than one physical 2BASE-TL or 10PASS-TS links, aggregated as described in 61.2.2. The Ethernet OAM operates as long as there is at least one PME in the PHY that is operational. The physical xDSL PMEs in Clause 62 and Clause 63 each have their own management channel that operates per loop (eoc, VOC and IB for 10PASS-TS; EOC and IB for 2BASE-TL).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 376 of 717

61.1.4.2 Summary of Transmission Convergence (TC) specification

The Transmission Convergence sublayer (TC) resides between the γ-interface of the PCS and α(β)-interface of the PMA. It is intended to convert the data frame to be sent into the format suitable to be mapped into PMA, and to recognize the received frame at the other end of the link. Since PMA and MII clocks may be unequal, the TC also provides clock rate matching. The definition of the TC sublayer is presented in 61.3.

61.1.4.3 Summary of handshaking and PHY control specification

Both 2BASE-TL and 10PASS-TS use handshake procedures defined in ITU-T G.994.1 at startup. Devices implementing both 2BASE-TL and 10PASS-TS port types may use G.994.1 to determine a common mode of operation.

61.1.5 Application of 2BASE-TL, 10PASS-TS

61.1.5.1 Compatibility considerations

The PCS, TC, PMA, and the MDI are defined to provide compatibility among devices designed by different manufacturers. Designers are free to implement circuitry within the PCS, TC, and PMA in an application-dependent manner provided the MDI and MII specifications are met.

61.1.5.2 Incorporating the 2BASE-TL, 10PASS-TS PHY into a DTE

When the PHY is incorporated within the physical bounds of a DTE, conformance to the MII is optional, provided that the observable behaviour of the resulting system is identical to that of a system with a full MII implementation. For example, an integrated PHY may incorporate an interface between PCS and MAC that is logically equivalent to the MII, but does not have the full output current drive capability called for in the MII specification.

61.1.5.3 Application and examples of PME Aggregation

The PME Aggregation Function defined in 61.2.2 allows multiple PME instances to be aggregated together to form one logical link underneath one MII (or MAC). Additionally, the control mechanism allows multi-MAC devices to be built with flexible connections between the MACs and the PMEs. Clause 45 defines a mechanism for addressing and controlling this flexible connectivity. The relationship between the flexible connectivity and the other functions within the PCS is shown in Figure 61–2.

The connection relationship between the PCS instances (including MIIs) and the PME instances is defined in two registers: PME_Available_register (see 45.2.3.19) and PME_Aggregate_register (see 45.2.3.20). The PME_Available_register controls which PMEs may be aggregated into a particular PCS (and MII). This register value is limited by the physical connectivity in the device, may be further constrained by management, and is additionally constrained as PMEs are aggregated into other PCSs (which causes their bit to be cleared to zero in the PCS instances that they are not aggregated into). The register represents the potential for connectivity into this PCS at the particular point in time. The PME_Aggregate_register indicates the actual connectivity, i.e. which PMEs are being aggregated into the particular PCS.

NOTE—The addressing of PCS instances is independent of the addressing of PME instances in order to support the flexible connectivity. Each PCS consumes one of the 32 available port addresses.

Bits corresponding to the same PME may appear in multiple PME_Available_registers but the PME_Aggregate_register for each MII shall be set such that each PME is only actively connected to at most one MII. A particular bit set in one PME_Aggregate_register shall exclude the same corresponding bit in all other PME_Aggregate_registers for the same MDIO connected system.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 377 of 717

61.1.5.3.1 Addressing PCS and PME instances

The addressing of the MDIO management interface is defined in 45.1. It is assumed that the reader is familiar with the definition of this interface. The examples here assume that only three MMDs are used: PCS (MMD = 3), TC (MMD = 6), and PMA/PMD (MMD = 1). The combination of TC, PMA and PMD is shown as PME in Figure 61–3. The difference between these examples and the example shown in 45.1 is that the PCS instances are addressed independently of the PME instances. Up to 32 PCS instances and up to 32 PME instances may be addressed by one MDIO bus. These instances may make up one or more aggregateable sub-domains. The connection of the MDIO bus to the MMDs is shown in Figure 61–3.

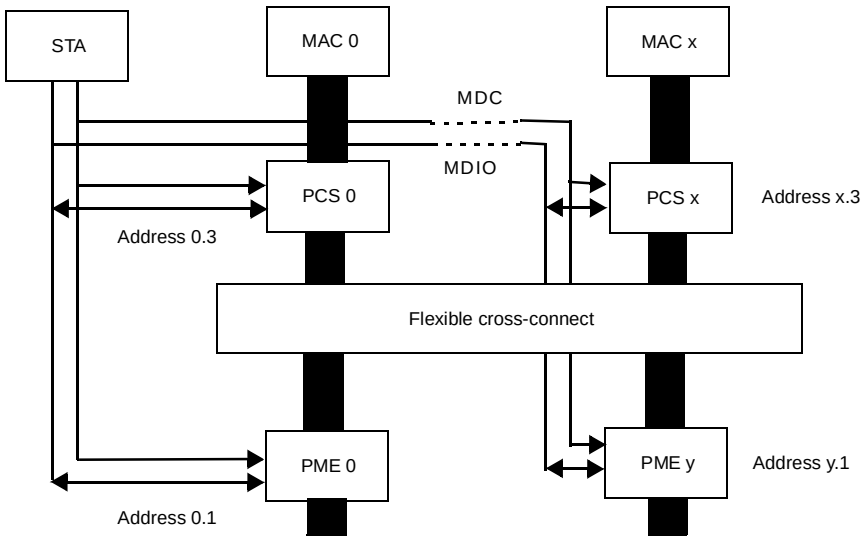


Figure 61–3—Connection of MDIO bus to MMD instances

In the example shown in Figure 61–3 there is no necessary connection between the PCS address and the PME address. The number of PCS instances may be different from the number of PME instances.

61.1.5.3.2 Indicating PME aggregation capability

The PME aggregation capability is indicated by the state of the PME_Available_register (see 45.2.3.19). An instance of this register is readable for each PAF instance *x* at register addresses *x*.3.62 and *x*.3.63. (Device address 3 of every port *x* is assigned to the PCS. The PAF specific registers reside under the *x*.3 register tree, because the PAF is part of the PCS as shown in Figure 61–2.) A bit is set in this register corresponding to the PME address for each PME which can be aggregated through the PAF in that PCS. Some examples are given which show register contents and connectivity for some popular configurations:

a) Simple two PME per MII connections, 32 PMEs are available for aggregation into 16 MIIs (PCS instances). PME_Available_register contents are shown in Table 61–1. A diagram of the connectivity is shown in Figure 61–4.
b) Pairs of 4-to-1 connections, 32 PMEs are available for aggregation into 16 MIIs (PCS instances) in a manner that allows each PME to connect to one of 2 MIIs and each MII to aggregate up to 4 PMEs. PME_Available_register contents are shown in Table 61–2. A diagram of the connectivity is shown in Figure 61–5.
c) 24-to-12 fully flexible connections, 24 PMEs are available for aggregation into 12 MIIs (PCS instances) in a manner that allows any PME to connect to any MII. PME_Available_register contents are shown in Table 61–3. No connectivity diagram is shown as any connection is possible between PMEs and MIIs.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 378 of 717

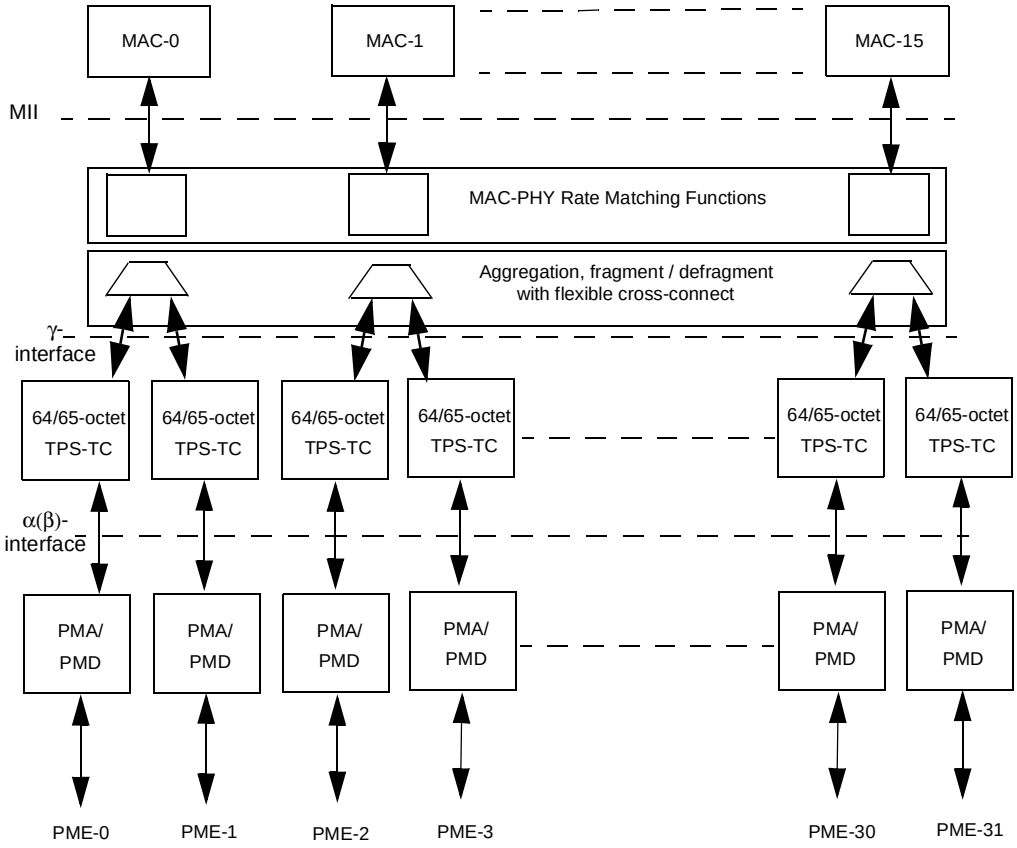


Figure 61–4—2 PME for each MII connectivity

Table 61–1—PME_Available_register contents (example a)

PME_Available_register	Contents
0.3.62 / 63	b11000000_00000000_00000000_00000000
1.3.62 / 63	b00110000_00000000_00000000_00000000
etc.	etc.
15.3.62 / 63	b00000000_00000000_00000000_00000011

Table 61–2—PME_Available_register contents (example b)[a]

PME_Available_register	Contents
0.3.62 / 63	b11110000_00000000_00000000_00000000
1.3.62 / 63	b11110000_00000000_00000000_00000000
etc.	etc.
15.3.62 / 63	b00000000_00000000_00000000_00001111

[a]NOTE—A mapping in which the same PME is available for connection to several PCS instances (as shown) is only allowed at the CO-side.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 379 of 717

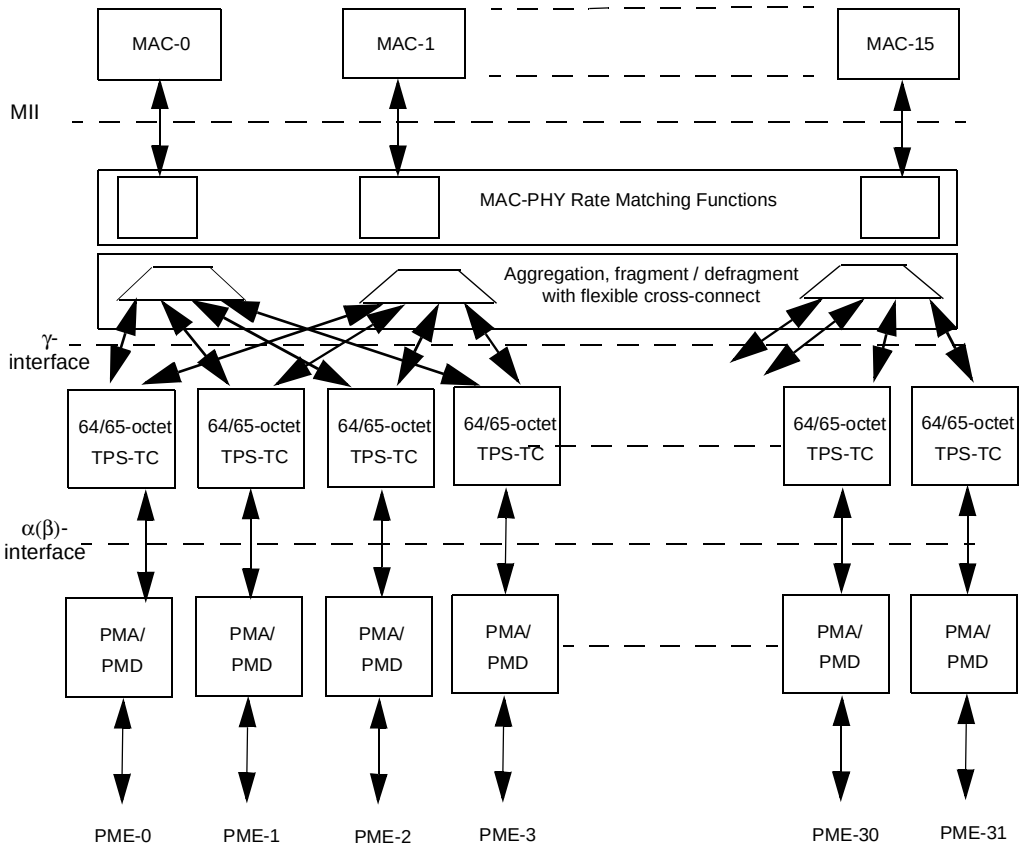


Figure 61–5—4 PME for each 2 MII connectivity

Table 61–3—PME_Available_register contents (example c)[a]

PME_Available_register	Contents
0.3.62 / 63	b11111111_11111111_11111111_00000000
1.3.62 / 63	b11111111_11111111_11111111_00000000
etc.	etc.
11.3.62/ 63	b11111111_11111111_11111111_00000000

[a]NOTE—A mapping in which the same PME is available for connection to several PCS instances (as shown) is only allowed at the CO-side.

61.1.5.3.3 Setting PME aggregation connection

The PME aggregation connection is set using the PME_Aggregate_register (see 45.2.3.20). This register is writeable for each PCS instance (*x*) at register addresses *x*.3.64 and *x*.3.65. A bit is set in this register corresponding to the PME address for each PME that is to be aggregated through that PCS. Some examples are given that show register contents and connectivity for some popular configurations:

a) Simple two PME per MII connections (as shown in example a above), the first MII aggregates 2 PMEs, the second MII only connects through 1 PME, as does the sixteenth. PME_Aggregate_register contents are shown in Table 61–4.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 380 of 717

b) Pairs of 4-to-1 connections (as shown in example b above), the first MII aggregates 3 PMEs, the second MII only connects through 1 PME, the sixteenth MII aggregates 2 PMEs. PME_Aggregate_register contents are shown in Table 61–5.
c) 24-to-12 fully flexible connections (as shown in example c above), the first MII aggregates 5 PMEs, the second MII only connects through the 24th PME, the eleventh MII is not used, twelfth MII aggregates 2 PMEs. PME_Aggregate_register contents are shown in Table 61–6.

Table 61–4—PME_Aggregate_register contents (example a)

PME_Aggregate_register	Contents
0.3.64 / 65	b11000000_00000000_00000000_00000000
1.3.64 / 65[a]	b00010000_00000000_00000000_00000000
etc.	etc.
15.3.64 / 65	b00000000_00000000_00000000_00000010

[a]NOTE—The PME Aggregation functions have to be performed when PAF_enable is set, even if only 1 bit is set in the PME_Aggregate_register.

Table 61–5—PME_Aggregate_register contents (example b)

PME_Aggregate_register	Contents
0.3.64 / 65	b11100000_00000000_00000000_00000000
1.3.64 / 65[a]	b00010000_00000000_00000000_00000000
etc.	etc.
15.3.64 / 65	b00000000_00000000_00000000_00000110

[a]NOTE—The PME Aggregation functions have to be performed when PAF_enable is set, even if only 1 bit is set in the PME_Aggregate_register.

Table 61–6—PME_Aggregate_register contents (example c)

PME_Aggregate_register	Contents
0.3.64 / 65	b11111000_00000000_00000000_00000000
1.3.64 / 65[a]	b00000000_00000000_00000001_00000000
etc.	etc.
10.3.64 / 65	b00000000_00000000_00000000_00000000
11.3.64 / 65	b00000000_00000000_00000110_00000000

[a]NOTE—The PME Aggregation functions have to be performed when PAF_enable is set, even if only 1 bit is set in the PME_Aggregate_register.

61.1.5.4 Support for handshaking

It is the goal of the ITU-T that all specifications for digital transceivers for use on public telephone network copper subscriber lines use G.994.1 for startup. G.994.1 procedures allow for a common startup mechanism for identification of available features, exchange of capabilities and configuration information, and selection of operating mode. As the two loop endpoints are usually separated by a large distance (e.g., in separate buildings) and often owned and installed by different entities, G.994.1 also aids in diagnosing interoperability problems. G.994.1 codespaces have been assigned by ITU-T to ATIS T1, ETSI, and IEEE 802.3 in support of this goal.

The description of how G.994.1 procedures are used for Ethernet in the First Mile handshaking and PHY control are contained in 61.4.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 381 of 717

61.2 PCS functional specifications

61.2.1 MAC-PHY Rate Matching functional specifications

61.2.1.1 MAC-PHY Rate Matching functions

The PHY shall use CRS to match the MAC's faster rate of data transmission to the PHY's slower rate.

Upon receipt of a MAC frame on the MII, the PHY shall discard the Preamble and SFD fields, and transmit the resulting data frame across the physical link.

The PHY shall prepend the Preamble and the SFD fields to a received frame before sending it to the MAC.

The PHY shall support a mode of operation where it does not send data to the MAC while the MAC is transmitting (see MII receive during transmit register, defined in 45.2.3.18).

If the PAF is disabled or not present, transmit frames shall not be forwarded to the TC sublayer unless TC_link_state is true for the whole frame. If the PAF is enabled, transmit fragments shall not be forwarded from the PAF to a TC sublayer unless the TC_link_state value of that TC sublayer instance is true for the whole fragment.

NOTE—This implies that in the absence of an active PAF, frames being transmitted over the MII when TC_link_state becomes true are never forwarded to the TC sublayer. A frame being transmitted over the MII when TC_link_state becomes false is aborted.

61.2.1.2 MAC-PHY Rate Matching functional interfaces

61.2.1.2.1 MAC-PHY Rate Matching – MII signals

MII signals are defined in 22.2.2 and listed in Table 23–1 in 23.2.2.1.

COL shall be forced to logic zero by the PCS.

CRS behaves as defined in 61.2.1.3.2.

61.2.1.2.2 MAC-PHY Rate Matching–Management entity signals

See 61.2.3.

61.2.1.3 MAC-PHY Rate Matching state diagrams

61.2.1.3.1 MAC-PHY Rate Matching state diagram constants

No constants are defined for the MAC-PHY rate matching state diagrams.

61.2.1.3.2 MAC-PHY Rate Matching state diagram variables

CRS
: CRS signal of the MII as specified in Clause 22. It is asserted when either of crs_tx or crs_rx are true: CRS ⇐ crs_tx + crs_rx

crs_and_tx_en_infer_col
: True if a reduced-pin MAC-PHY interface is present that infers a collision when TX_EN and CRS are both true simultaneously.

crs_rx
: Asserted by the MAC-PHY rate matching receive state machine to control CRS

crs_tx
: Asserted by the MAC-PHY rate matching transmit state machine to control CRS

power_on
: 'power_on' is true while the device is powering up. It becomes false once the device has

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 382 of 717

reached full power. Values:
FALSE; The device is completely powered (default).
TRUE; The device has not been completely powered.

Reset
True when the PCS is reset via control register bit 3.0.15.

RX_DV
RX_DV signal of the MII as specified in Clause 22

rx_frame_available
Set when the PHY's receive FIFO contains one or more complete frames

transferFrameCompleted
Variable of type boolean
TRUE if the transmission of the received frame over the MII has been completed,
FALSE otherwise.
The variable returns to the default state (FALSE) upon entry into any state.

tx_buffer_available
Set when the PHY's transmit FIFO has space to receive a maximum length packet from the MAC

TX_EN
TX_EN signal of the MII as specified in Clause 22

tx_rx_simultaneously
False if the MAC is configured in half duplex mode to support deference and it is not capable of transmitting and receiving simultaneously in this mode.

61.2.1.3.3 MAC-PHY Rate Matching state diagram timers

ipg_timer
Timer used to generate a gap between receive packets across the MII.
Duration: 960 ns, tolerance ±100 ppm.

rate_matching_timer
Timer used in rate matching state machine
Duration: 1120 ns, tolerance ±100 ppm.

The rate_matching_timer operates in a manner consistent with 14.2.3.2. The timer is restarted on entry to the WAIT_FOR_TIMER_DONE state with the action: 'Start rate_matching_timer'. It is then tested in the exit condition with the expression "rate_matching_timer_done".

The duration is set to 1120 ns to allow 960 ns for the inter frame gap plus 160 ns for the MAC to recognize CRS. 160 ns is equivalent to 16 bit times and is consistent with the assumptions about MAC performance listed in Table 21-2 in 21.8.

61.2.1.3.4 MAC-PHY Rate Matching state diagram functions

transferFrame()
This function transmits a packet to the MAC across the MII, according to the MII protocol as described in 22.2. This function generates RX_DV to delimit the frame in accordance with 22.2.2.6. Upon completion of frame transfer to the MAC, this function sets the variable transferFrameCompleted to TRUE.

61.2.1.3.5 MAC-PHY Rate Matching state diagrams

The state diagrams for the MAC-PHY Rate Matching functions are shown in Figure 61–6, Figure 61–7 and Figure 61–8.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 383 of 717

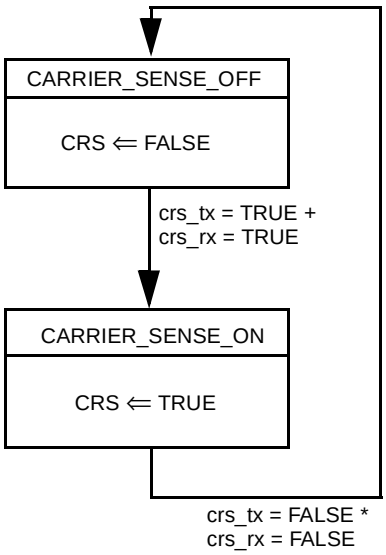


Figure 61–6—Carrier Sense state diagram

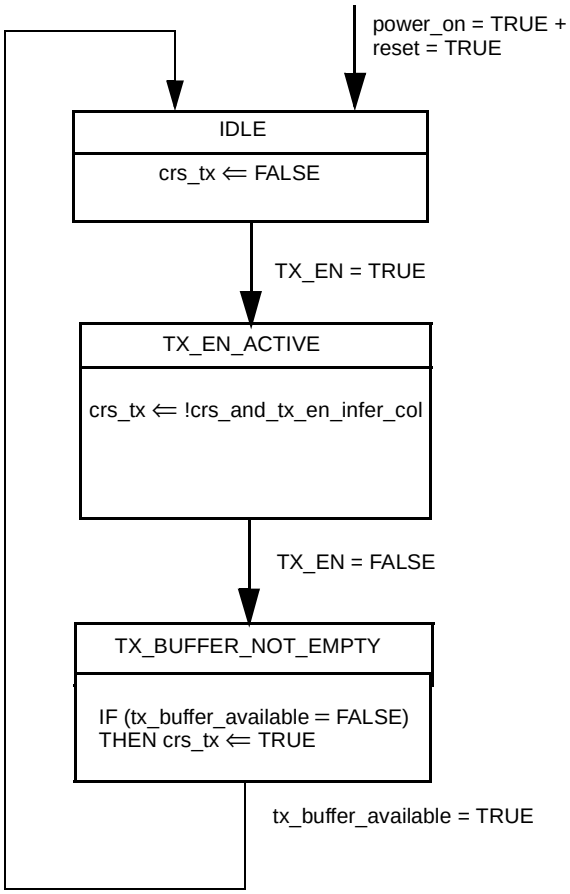


Figure 61–7—MAC-PHY rate matching transmit state machine

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 384 of 717

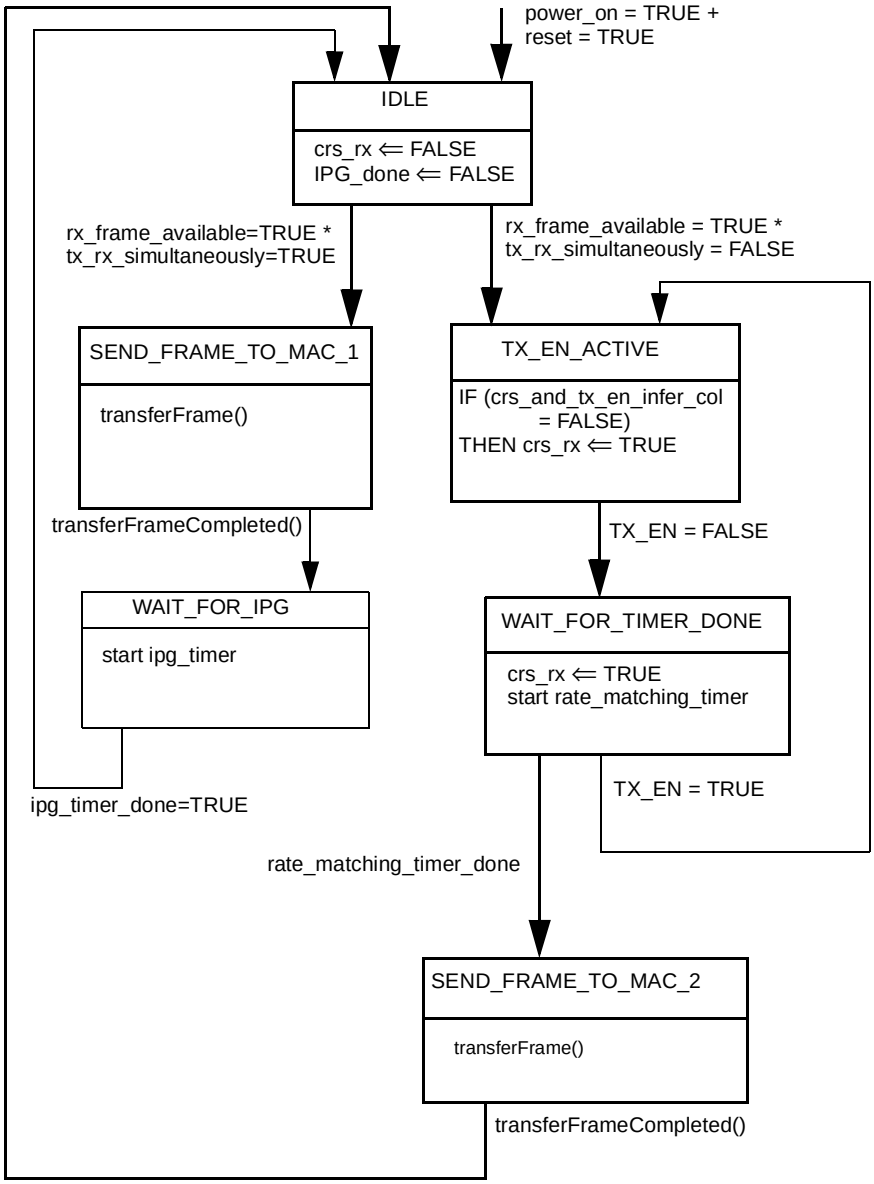


Figure 61–8—MAC-PHY rate matching receive state machine

61.2.2 PME Aggregation functional specifications

This subclause defines an optional PME Aggregation Function (PAF) for use with CSMA/CD MACs in EFM copper PHYs. PME Aggregation allows one or more PMA/PMDs to be combined together to form a single logical Ethernet link.

The PAF is located between the MAC-PHY Rate Matching function and the TC sublayer as shown in Figure 61–2. The PAF interfaces with the TC sublayer instances across the γ-interface. The PAF interfaces to the MAC-PHY Rate Matching function using an abstract interface whose physical realization is left to the implementor, provided the requirements of this standard are met.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 385 of 717

DirecTV Exhibit 1010, Page 386 of 717

The PME Aggregation function has the following characteristics:

a) Supports aggregation of up to 32 PMA/PMDs
b) Supports individual PMA/PMDs having different data rates
c) Ensures low packet latency and preserves packet sequence
d) Scalable and resilient to PME failure
e) Independent of type of EFM copper PHY
f) Allows vendor discretionary algorithms for fragmentation

61.2.2.1 PAF Enable and Bypass

For systems that do not have the ability to aggregate loops PAF_available will not be asserted. Additionally, a system may have PAF_available asserted but PAF_enable will be deasserted to indicate that aggregation is not activated.

In both of these cases, the entire data frame is passed across the γ-interface to the TC sublayer without any fragmentation and without fragmentation header. On the receive end, entire data frames are transferred from the γ-interface to the MAC-PHY rate matching function without any reference to the PAF error detecting rules (see 61.2.2.7). If an error has been detected by the FCS in the TC then the MAC-PHY rate matching function shall assert RX_ER during at least one octet of the frame across the MII.

Systems that have the ability to aggregate but are not enabled for aggregation will have the connectivity between the PCS and one PME set either by default, by local management (for CO-subtype devices) or by remote management (for CPE-subtype devices). This will define which γ-interface is used for the transfer of non-fragmented frames. Refer to 61.2.2.8.3 for the function of PAF_available and PAF_enable and Clause 45 for access to these registers.

61.2.2.2 PME Aggregation functions

The PME Aggregation functions provide a fragmentation procedure at the transmitter and a reassembly procedure at the receiver. The fragmentation and reassembly procedures take a data frame and partition it into one or more fragments as shown in Figure 61–9. Each fragment is given a fragmentation header and transmitted over a specific TC sublayer instance. A Frame Check Sequence, known as the TC-CRC, is added to each fragment by the TC sublayer. The fragmentation header has the format shown in Figure 61–10. Short data frames can be transported over a single fragment, and consequently both StartOfPacket and EndOfPacket can be set to ‘1’ simultaneously.

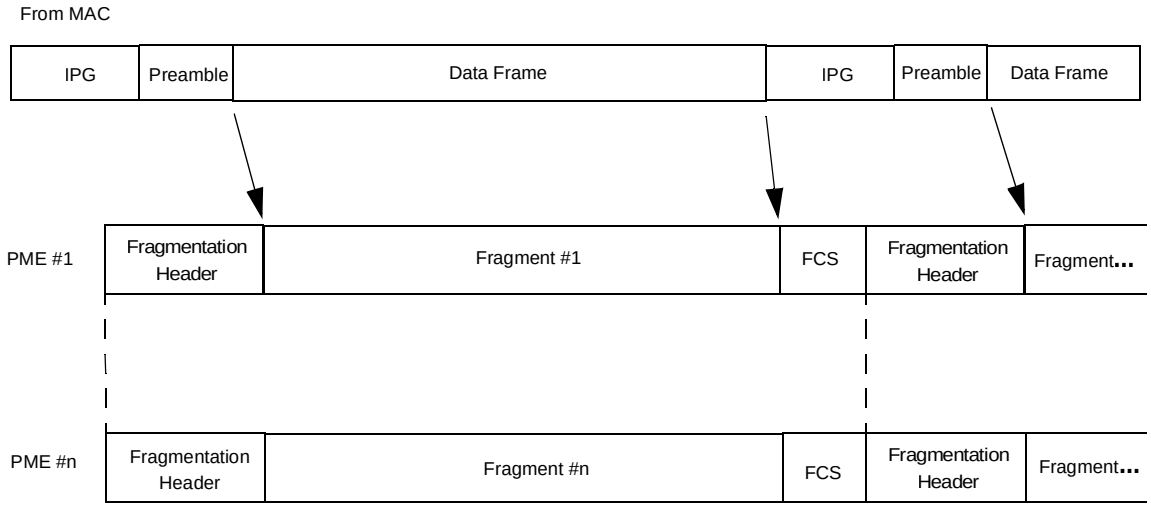


Figure 61–9—Data frame fragmentation

 Copyright © 2004 IEEE. All rights reserved.




Figure 61–10—Fragment format

61.2.2.3 PME Aggregation Transmit function

The PME Aggregation transmit functions uses the following algorithm:

a) Select an active PME (i.e., one with TC_link_state asserted, see 61.3.1) for the next transmission.
b) Select the number of octets to transmit on that PME (shall not be less than minFragmentSize nor greater than maxFragmentSize, see 61.2.2.6).
c) Increment by one (modulo 2^{14}) and set fragment sequence number in the Fragmentation Header. There is a single sequence number stream for each aggregation, not one per PME. It is this sequence number stream that the receiver uses for fragment reassembly.
d) Set the start-of-packet and end-of-packet bits in the Fragmentation Header as appropriate.
e) Transmit fragment to the TC sublayer.

It is important to note that the selection of the next PME to use in transmission (step (a)) and the number of octets to transmit (step (b)) is implementation dependent. However, implementations shall follow the restrictions as outlined in 61.2.2.6.

61.2.2.4 PME Aggregation Receive function

The PME aggregation receive function requires per-PME queues as well as a per-MAC fragment buffer for fragment reassembly. The algorithm assumes only “good” fragments are placed on the per-PME receive queues (“bad” fragments are discarded according to the rules in 61.2.2.7).

The sequence number rolls over after it reaches the maximum value, thus all sequence number comparisons shall use “split horizon” calculations. Split horizon calculations are defined for comparisons that are valid for numbers that roll over after reaching the maximum value. Generically, “x is less than y” is defined as $x < y \leq x + (\text{maxSequenceNumber}+1)/2$.

61.2.2.4.1 Expected sequence number

During initial start-up and in the event of certain errors, the receive algorithm has to determine which sequence number is expected next (expectedFragmentSequenceNumber). When the link state is changed to UP, the expected sequence number is unknown and no errors in fragment sequencing (see 61.2.2.7.2) shall be recorded.

61.2.2.4.2 PME Aggregation Receive function state diagram variables

The following variables are used in the PME Aggregation Receive function state diagram.

allQueuesNonEmpty
: variable of type boolean that indicates whether any active queue is currently empty.
TRUE if none of the active queues is currently empty
FALSE if at least one active queue is currently empty

expectedFragmentSequenceNumber
: the sequence number expected in the receive process that would not result in a fragment error, initialized to the smallest sequence number of fragments at the head of per-PME queues when either all active queues are non-empty or at least one queue has been non-empty for maxDifferentialDelay bit times at the bit rate of the PMD associated with that queue

frameLengthOverflow
: variable of type boolean, indicating that the reassembly buffer is overflowing due to a received frame that is too long, as described in 61.2.2.7.3.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 387 of 717

TRUE if the overflow condition exists
FALSE during normal operation

missingStartOfPacket
: variable of type boolean, indicating that a fragment was received with the StartOfPacket bit deasserted while the packet assembly function was between frames (i.e., waiting for a Start of Packet).

nextFragmentSequenceNumber
: smallest sequence number of fragments at the head of per-PME queues

noFragmentProcessed_Timer
: variable of type boolean that indicates whether at least one active queue has been non-empty for maxDifferentialDelay bit times at the bit rate of the PMD associated with that queue. Each fragment processed on any queue restarts all per-queue timers.
TRUE if a timeout of maxDifferentialDelay bit times has expired
FALSE if the timeout of maxDifferentialDelay bit times has not yet expired

oneQueueNonEmpty_Timer
: variable of type boolean that indicates whether at least one active queue has been non-empty for at least maxDifferentialDelay bit times.
TRUE if at least one active queue has been non-empty for at least maxDifferentialDelay bit times
FALSE otherwise

smallestFragmentSequenceNumber
: smallest sequence number of fragments at the head of per-PME queues

unexpectedEndOfPacket
: variable of type boolean, indicating that a fragment was received with the EndOfPacket bit asserted and the StartofPacket bit deasserted while the packet assembly function was between frames (i.e. waiting for a Start of Packet)

unexpectedStartOfPacket
: variable of type boolean, indicating that a fragment is received with the StartOfPacket bit asserted while the packet assembly function was mid-frame (i.e. waiting for an End of Packet)

The following functions are used in the PME Aggregation Receive function state diagram.

errorDetection()
: function comprising the process described in 61.2.2.7.2

fragmentError()
: function comprising the process described in 61.2.2.7.3

61.2.2.4.3 PME Aggregation Receive function state diagram

The receive function executes the algorithm as shown in Figure 61–11. The initial state of the state machine is INITIALIZING. This state is entered when at least one TC_link_state is asserted for the first time after system power-on, and each time when at least one TC_link_state is asserted after all having been deasserted for any reason.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 388 of 717

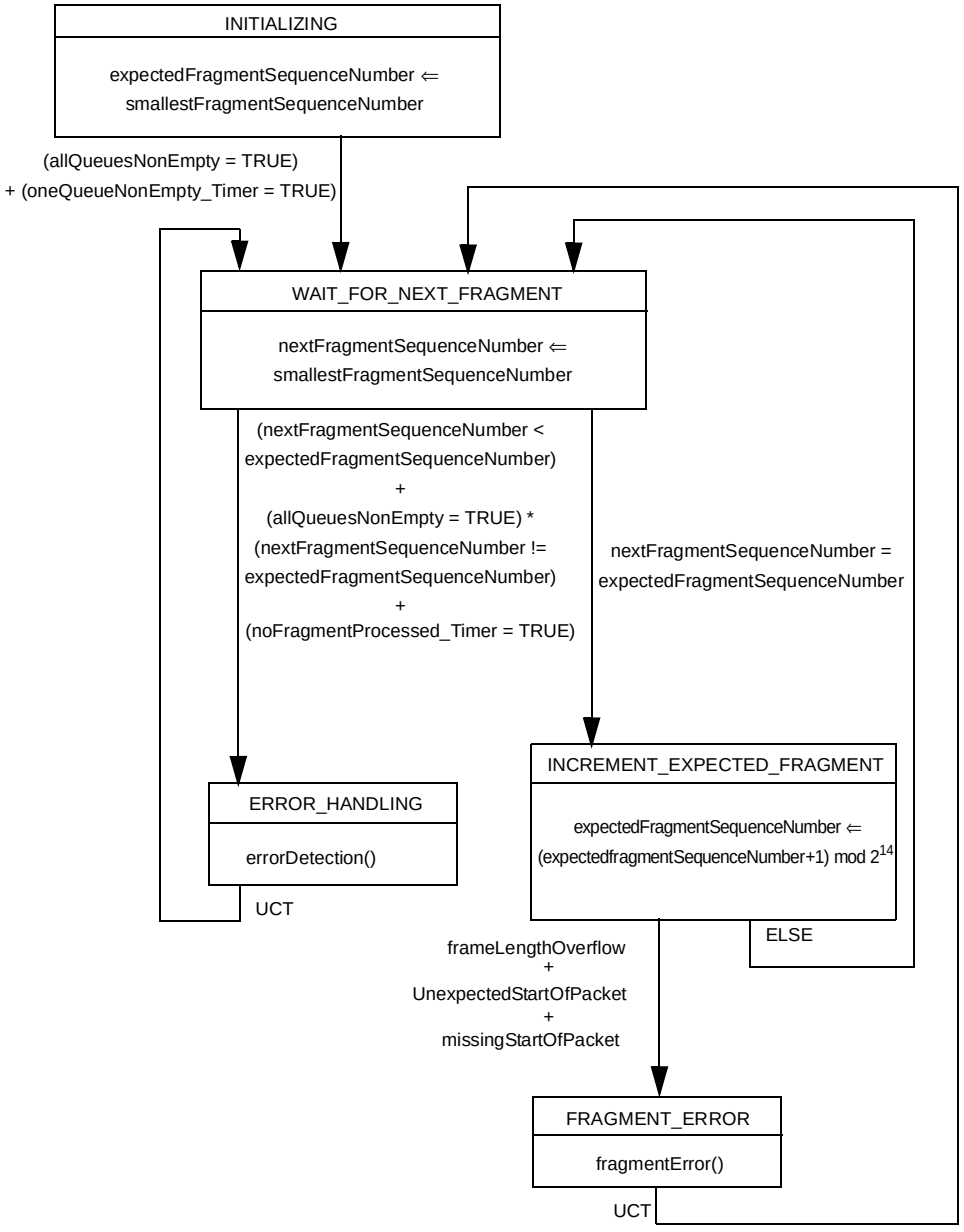


Figure 61–11—Aggregation receive function.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 389 of 717

61.2.2.4.4 PME Aggregation Receive function state diagram description

Aggregation receive algorithm:

a) Determine the nextFragmentSequenceNumber via the algorithm in 61.2.2.4.1.
b) If the nextFragmentSequenceNumber is equal to the expectedFragmentSequenceNumber, process that fragment and continue to step c). If (nextFragmentSequenceNumber is less than expectedFragmentSequenceNumber) or (all the active PME queues are non-empty and nextFragmentSequenceNumber ≠ expectedFragmentSequenceNumber) or (any PME queue has been non-empty for maxDifferentialDelay bit times without any fragment being processed) follow the fragment sequence error handling rules described in 61.2.2.7.2 before returning to normal fragment processing.
c) Accept the fragment into the fragment buffer. If (accepting the fragment into the fragment buffer causes a frame length overflow) or (the fragment is an unexpected start of packet) or (the fragment is an unexpected end of packet) or (the fragment has the StartOfPacket bit deasserted when the start of a new packet is expected) then follow the error handling procedures described in 61.2.2.7.3. Else if that fragment is an end-of-packet, pass the packet to the MAC-PHY Rate Matching layer.
d) Increment (modulo 2^{14}) the expectedFragmentSequenceNumber.
e) Repeat processing.

61.2.2.5 PME Aggregation restrictions

In order to guarantee correct receiver operation, a transmitter must ensure that pairs in an aggregate group obey certain restrictions.

NOTE—These restrictions ensure that buffer sizes for receivers of 2^{14} bits per PME are sufficient.

One factor is the differential latency between multiple PMEs in an aggregated group. Differential latency measures the variation in the time required to transmit across different PMEs. To normalize the latency measurement for high and low speed links it is measured in bit times. A differential latency between two PMEs is defined as the number of bits, N, that can be sent across the fast link, in the time that it takes one maxFragmentSize fragment to be sent across the slow link. Large differential latencies generate greater variance in bit delivery times across aggregated PMEs, which in turn require large sequence number ranges. The PMD control of aggregated links controls the maximum latency difference between any two aggregated links. This is achieved by configuring the bit rate, error correction and interleaving functions in the PMA/PMD of each link. The burst noise protection offered by the error correction and interleaving[11] functions is directly proportional to the latency, therefore it is logical that multiple aggregated links in the same environment should be optimized to have similar latencies. Differences in electrical length will not contribute significantly to the differential latency; no additional per-PME buffer size is required for this variation.

NOTE—The value for differential latency for two identical links will be 4096 bit times because the definition includes the length of a maximum size fragment.

The speed ratio of the links also restricts what PMEs can be aggregated together. The speed ratio is defined as the ratio of the bit rate of the faster link divided by the bit rate of the slower link.

The restrictions that govern which PMEs can be aggregated are:

a) The differential latency between any two PMEs in an aggregated group shall be no more than maxDifferentialDelay.
b) The highest ratio of speeds between any two aggregated links shall be maxSpeedRatio. A speed ratio of 4 may only be used if the latency is controlled to meet the restriction.

[11]Interleaving is the relevant issue here, since it affects latency. While 2BASE-TL does not have block error correction, it does use trellis coding, which is sometimes considered forward error correction.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 390 of 717

Table 61–7 specifies the values for constants maxDifferentialDelay and maxSpeedRatio.

Table 61–7—PME Aggregation constants

Constant name	Value
maxDifferentialDelay	15 000 bit times
maxSpeedRatio	4

61.2.2.6 PME Aggregation transmit function restrictions

There are factors that limit the freedom of the transmission algorithm specified in 61.2.2.3.

A first factor is the size of the fragments being transmitted across the PMEs. Very small fragments require larger sequence number ranges as there can be more fragments within the same number of bit times.

Another restriction on the size of the fragments, is that fragments shall be a multiple of 4 octets in size when possible.

The restrictions for the transmission algorithm in 61.2.2.3 are:

a) Fragments shall not be less than minFragmentSize not including PAF header.
b) Fragments shall not be more than maxFragmentSize not including PAF header.
c) The fragment size, not including PAF header, shall be a multiple of 4 octets except for the last fragment of a data frame.

NOTE—A fragment size of maxFragmentSize may only be used if the latency is controlled to meet the restriction (a) in 61.2.2.5.

These restrictions allow the use of a 14-bit sequence number space. As a consequence, the maximum sequence number is 2^{14}–1 (maxSequenceNumber).

Table 61–8 specifies the values for constants maxFragmentSize and minFragmentSize.

Table 61–8—Fragment size constants

Constant name	Value
maxFragmentSize	512 octets
minFragmentSize	64 octets

61.2.2.7 Error-detecting rules

There are three classes of error detected by the PAF: Errors during fragment reception; Errors in fragment sequencing; and Errors during packet reassembly. In the case of an error detected by the PAF, it sends the frame or part of frame to the MAC with RX_ER asserted. When the PAF is unable to reconstruct or partially reconstruct a frame due to such errors, it sends a garbage frame up to the MAC, in order to allow higher-layer event counters to register the error. The garbage frame shall consist of 64 octets of 00 (including CRC). Preamble and SFD are prepended before the frame is sent to the MII according to 61.2.1.1.

The rules described in this subclause are applied by the functions errorDetection() and fragmentError() referenced in Figure 61–11.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 391 of 717

61.2.2.7.1 Errors during fragment reception

The receive TC function passes all decapsulated fragments to the PAF across the γ-interface. If the TC detects an error in the encapsulation, it asserts Rx_Err on the γ-interface. If the TC detects an error in the TC-CRC, it asserts Rx_Err on the γ-interface. Asserting Rx_Err during fragment reception invalidates the entire fragment.

For each PMA (α(β)-interface), the per-PMA buffering mechanism shall discard the fragment if any of the following conditions occur:

a) Rx_Err is asserted during the reception of the fragment across the γ-interface.
b) The fragment is too small - less than minFragmentSize as defined in 61.2.2.6.
c) The fragment is too large - more than maxFragmentSize as defined in 61.2.2.6.
d) The fragment would cause the per-PMA received buffer to overflow.

The PAF shall then assert one of the per-PMA error flags as appropriate:

a) TC_PAF_RxErrorReceived
b) TC_PAF_FragmentTooSmall
c) TC_PAF_FragmentTooLarge
d) TC_PAF_Overflow

61.2.2.7.2 Errors in fragment sequencing

If nextFragmentSequenceNumber is outside the range (expectedFragmentSequenceNumber through expectedFragmentSequenceNumber + (maxSequenceNumber+1)/2) then assert PAF_BadFragmentReceived. Discard the fragment, do not increment ExpectedFragmentSequenceNumber.

If all active PMA buffers are non empty and nextFragmentSequenceNumber is greater than expectedFragmentSequenceNumber then assert PAF_LostFragment, set expectedFragmentSequenceNumber equal to nextFragmentSequenceNumber.

If any PMA buffer is non empty for maxDifferentialDelay bit times (for that PMA/PMD) and no fragment is transferred then assert PAF_LostFragment, set expectedFragmentSequenceNumber equal to nextFragment-SequenceNumber.

Having detected one of the above fragment sequencing errors, the packet assembly function shall act as follows:

—If the packet assembly function was mid-frame (i.e. waiting for an End of Packet), the first part of the frame shall be transferred across the MII, then assert RX_ER signal on the MII, abort frame transfer and flush PMA buffers until the next Start of Packet is received.

—If the packet assembly function was between frames (i.e. waiting for a Start of Packet), assert RX_ER signal on the MII and send a garbage frame as defined in 61.2.2.7 to the MAC.

61.2.2.7.3 Errors in packet reassembly

If a fragment is received with the StartofPacket bit deasserted while the packet assembly function was between frames (i.e. waiting for a Start of Packet), discard the offending fragment, assert RX_ER signal on the MII and send a garbage frame as defined in 61.2.2.7 to the MAC. Assert PAF_LostStart.

If a fragment is received with the StartOfPacket bit asserted while the packet assembly function was mid-frame (i.e. waiting for an End of Packet), the first part of the frame shall be transferred across the MII, then assert RX_ER signal on the MII, abort frame transfer and flush the PMA buffers, starting the next frame with the Start of Packet fragment just received. Assert PAF_LostEnd.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 392 of 717

If a fragment is received while the packet assembly function was mid-frame (i.e. waiting for an End of Packet) and would cause the frame size to exceed the maximum allowable frame size (i.e. maxUntagged-FrameSize + qTagPrefixSize, currently 1522 octets (see 3.5, 4.2.7.1 and 4.4)) then the first part of the frame, excluding the error causing fragment, shall be transferred across the MII, then assert RX_ER signal on the MII, abort frame transfer and flush PMA buffers until the next Start of Packet is received. Assert PAF_LostEnd.

61.2.2.8 PME aggregation functional interfaces

The PAF interfaces with the TC sublayer instances across the γ-interface. The PAF interfaces to the MAC-PHY Rate Matching function using an abstract interface whose physical realization is left to the implementor, provided the requirements of this standard are met.

61.2.2.8.1 PME aggregation–γ-interface signals

The PAF interfaces with the PMA/PMDs across the γ-interface. The γ-interface specification is defined in 61.3.1. This subclause specifies the data, synchronization and control signals that are transmitted between the TC sublayer and the PAF.

61.2.2.8.2 PME aggregation–management entity signals

The management entity signals pertaining to PME aggregation are specified in 61.2.3.

61.2.2.8.3 PME aggregation register functions

If an MDIO interface is provided (see Clause 22 and Clause 45), PME aggregation registers are accessed via that interface. If not, it is recommended that an equivalent access be provided.

Clause 45 defines one bit each in the EFM 10P/2B capability register and the 10P/2B PCS control register to control the PAF function (see 45.2.3.17 and 45.2.3.18 respectively). PAF_available is used to indicate that the system has the capability to aggregate PMEs, PAF_enable is used to control whether this ability is enabled or not. In all cases, the PAF_available bit is read-only; the PAF_enable bit is read-only when the PAF_available bit is not asserted.

For CO-subtype devices, both the PAF_available and the PAF_enable bits are only accessible locally, the PAF_enable bit is writeable.

For CPE-subtype devices, both the PAF_available and the PAF_enable bits are locally read only and remotely readable. Additionally, the PAF_enable bit is remotely writeable.

Clause 45 defines access to two registers which relate to the PME aggregation function: the PME_Available_register (see 45.2.3.19) and the PME_Aggregate_register (see 45.2.3.20). Additionally the remote_discovery_register and Aggregation_link_state_register shall be implemented.

NOTE—The remote_discovery_register is a variable which is defined for CPE-subtypes only. It is used during the PME aggregation discovery process. The Aggregation_link_state_register is a variable with significance for the PCS only. These variables have no associated management interface registers.

The PME_Available_register is read-only for CO-subtype and may be writeable for CPE-subtype (in order to restrict CPE-subtype connection capability according to 45.2.3.19). It indicates whether an aggregateable link is possible between this PCS and multiple PMD's. For a device that does not support aggregation of multiple PMEs, a single bit of this register shall be set and all other bits clear. The position of bits indicating aggregateable PME links correspond to the PMA/PMD sub-address defined in Clause 45.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 393 of 717

For CPE-subtype devices, the PME_Available_register may optionally be writeable by the local management entity. The reset state of the register reflects the capabilities of the device. The management entity (through Clause 45 access) may clear bits which are set, in order to limit the mapping between MII and PME for PME aggregation. For CPE-subtype devices, PMD links shall not be enabled (such that it shall not respond to or initiate any G.994.1 handshaking sessions, on any of its PMEs) until the PME_Available register has been set to limit the connectivity such that each PME maps to at most one MII (see 45.2.3.19). This condition is necessary so that remote commands from the network-end which affect PCS registers have a defined target. PMDs that are not associated to any PCS shall not respond to or initiate any G.994.1 handshaking signals. Multiple PMEs per MII are allowed.

The PME_Aggregate_register is defined in Clause 45. For CO-subtype devices, access to this register is through Clause 45 register read and write mechanisms. For CPE-subtype devices the register may be read locally through Clause 45, and reads and writes shall be allowed from remote devices via the remote access signals passed across the γ-interface from the PMA (see 61.3.1). The operation of the PME_Aggregate_register for CPE-subtype devices is defined as follows:

a) If the remote_discovery_register is clear then the PME_Aggregate_register shall be cleared.
b) If write_remote_Aggregation_reg is asserted, the contents of remote_write_data bit zero is written to PME_Aggregate_register in the bit location corresponding to the PMA/PMD from which the request was received. Acknowledge_read_write is asserted for one octet clock cycle.
c) If read_remote_Aggregation_reg is asserted, the contents of PME_Aggregate_register are placed onto remote_read_data_bus, bits 31 through 0. Unsupported bits are written as zero if the full width of PME_Aggregate_register is not supported. Acknowledge_read_write is asserted for one octet clock cycle.

61.2.2.8.4 PME aggregation discovery register functions

The remote_discovery_register shall be implemented for CPE-subtype devices. The remote_discovery_register shall support atomic write operations and reads from remote devices via the remote access signals passed across the γ-interface from the PMA (see 61.3.1). The operation of the remote_discovery_register for CPE-subtype devices is defined as follows:

a) If read_remote_discovery_reg is asserted, which corresponds to a “Get” command as described in 61.4.7.1, the contents of remote_discovery_register are placed onto remote_read_data_bus. Acknowledge_read_write is asserted for one octet clock cycle[12].
b) If write_remote_discovery_reg is asserted, which corresponds to a “Set if Clear” command as described in 61.4.7.1, the action depends on the contents of remote_discovery_register. If the remote_discovery_register is currently clear (no bits asserted), the contents of the remote_write_data bus are placed into the remote_discovery_register. The new contents of remote_discovery_register are placed on the remote_read_data_bus. Acknowledge_read_write is asserted for one octet clock cycle. Else if the remote_discovery_register is not currently clear (any bit asserted), no data is written. The old contents of remote_discovery_register are placed on the remote_read_data_bus. NAcknowledge_read_write is asserted for one octet clock cycle. If multiple write_remote_discovery_reg signals are asserted (from multiple γ-interfaces) they shall be acted upon serially.
c) If clear_remote_discovery_reg is asserted, which corresponds to a “Clear if Same” command as described in 61.4.7.1, the action depends on the contents of remote_discovery_register. If the contents of the remote_write_data bus match that of the remote_discovery_register, the remote_discovery_register is cleared, the PME_Aggregate_register is cleared, the new contents of remote_discovery_register are placed on the remote_read_data_bus, and Acknowledge_read_write is asserted for one octet clock cycle. If the contents of the remote_write_data bus do not match that of the the remote_discovery_register, the remote_discovery_register is unchanged, its contents are placed on the remote_read_data_bus, and NAcknowledge_read_write is asserted for one octet clock cycle.

[12]If the CPE device fails to respond, NAcknowledge_read_write is asserted with remote_read_data_bus set to 000000000000_{16}.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 394 of 717

d) If the logical AND of the Aggregation_link_state_register and the PME_Aggregate_register is clear then a timeout counter shall be started. If this condition continues for 30 seconds (the timeout period) then the remote_discovery_register shall be cleared.

A single device may be implemented which has multiple MIIs and (therefore) multiple PCS instances. There shall be one remote_discovery_register per PCS instance. The PME_Available_register shall be set prior to the enabling of links so that each PMA/PMD is linked to only one PCS. Access to the remote_discovery_register (read or write) shall be restricted to PMA/PMD instances for which the corresponding PME_Available_register bit is asserted.

The Aggregation_link_state_register is a pseudo-register corresponding to the TC_link_state bits from each γ-interface in the appropriate bit positions according to the PMA/PMD from which the signal is received. Bits corresponding to unsupported aggregation connections are zero.

The remote access mechanisms for the PME aggregation registers are defined in 61.4.7.

61.2.3 PCS sublayer: Management entity signals

The management interface has pervasive connections to all functions. Operation of the management control lines MDC and MDIO is specified in Clause 22 and Clause 45, and requirements for managed objects inside the PCS and PMA are specified in Clause 30

The following MAC-PHY Rate Matching function signals are mapped to Clause 45 registers:

tx_rx_simultaneously
: this signal is asserted by the management entity to indicate that the MAC which is connected to the PHY is capable of receiving and transmitting simultaneously while in half-duplex mode. The corresponding register (“MII receive during transmit”) is defined in 45.2.3.18.

crs_and_tx_en_infer_col
: this signal is asserted by the management entity to indicate that the MAC uses simultaneous detection of TX_EN and CRS to infer a collision. This signal is used in the rate matching state diagrams (Figure 61–7 and Figure 61–8). The corresponding register (“TX_EN and CRS infer a collision”) is defined in 45.2.3.18.

The following PAF signals are mapped to Clause 45 registers or cause Clause 45 counters to increment:

PAF_available
: this signal indicates to the management whether the PAF function is available for use. The corresponding register is defined in 45.2.3.17.1.

PAF_enable
: this signal is asserted by the management entity to indicate that the PAF function is enabled. The corresponding register is defined in 45.2.3.18.3.

TC_PAF_RxErrorReceived
: (for each PMA, γ-interface) this signal is asserted to indicate that a fragment has been received across the γ-interface with Rx_Err asserted. The errored fragment has been discarded. The corresponding register is defined in 45.2.3.21.

TC_PAF_FragmentTooSmall
: (for each PMA, γ-interface) this signal is asserted to indicate that a fragment has been received across the γ-interface which was smaller than the minFragmentSize defined. The errored fragment has been discarded. The corresponding register is defined in 45.2.3.22.

TC_PAF_FragmentTooLarge
: (for each PMA, γ-interface) this signal is asserted to indicate that a fragment has been received across the γ-interface which was larger than the maxFragmentSize defined. The errored fragment has been discarded. The corresponding register is defined in 45.2.3.23.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 395 of 717

TC_PAF_Overflow
: (for each PMA, γ-interface) this signal is asserted to indicate that a fragment has been received across the γ-interface which would have caused the receive buffer to overflow. The errored fragment has been discarded. The corresponding register is defined in 45.2.3.24.

PAF_BadFragmentReceived
: this signal is asserted to indicate that a fragment has been received which does not fit into the sequence expected by the frame assembly function. The errored fragment has been discarded and the frame buffer flushed to the next valid frame start. The corresponding register is defined in 45.2.3.25.

PAF_LostFragment
: this signal is asserted to indicate that a fragment (or fragments) expected according to sequence has not been received by the frame assembly function. The missing fragment (or fragments) has been skipped and the frame buffer flushed to the next valid frame start. The corresponding register is defined in 45.2.3.26.

PAF_LostStart
: this signal is asserted to indicate that the packet reassembly function did not receive a StartOf Packet indicator in the appropriate sequence. The corresponding register is defined in 45.2.3.27.

PAF_LostEnd
: this signal is asserted to indicate that the packet reassembly function did not receive an EndOfPacket indicator in the appropriate sequence. The corresponding register is defined in 45.2.3.28.

PCS_link_state
: this signal is asserted to indicate that at least one TC_link_state in the assigned aggregation group is up.

Additionally, the following PAF register is mapped to a Clause 45 register:

remote_discovery_register
: this register is implemented in CPE-subtype devices. It is written or read by the PME via the γ-interface. The PME relays this information to and from the associated CO-subtype device via the handshake messages described in 61.4.7. The CO-subtype device interprets the contents of the remote_discovery_register to determine which remote PMEs connect to the same PCS and may be aggregated. The corresponding Clause 45 register is defined in 45.2.6.6.1.

61.3 TC sublayer functional specifications

The functional model of the TC sublayer is presented in Figure 61–12. The term “TPS-TC” (Transport Protocol Specific - Transmission Convergence) is used in ITU-T Recommendation G.993.1. In this context the term “TC” (Transmission Convergence) is sufficient as no other types of TC are defined in this subclause (e.g. PMS-TC).

Because the PAF function is optional, either entire data frames or data frame fragments may be passed across the γ-interface. In this section, the term “fragment” will be used to describe either fragments or data frames depending on the existence of the PAF. Also, the term PAF is used to represent the superior function to the TC, regardless of whether the PAF actually exists.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 396 of 717

DirecTV Exhibit 1010, Page 397 of 717

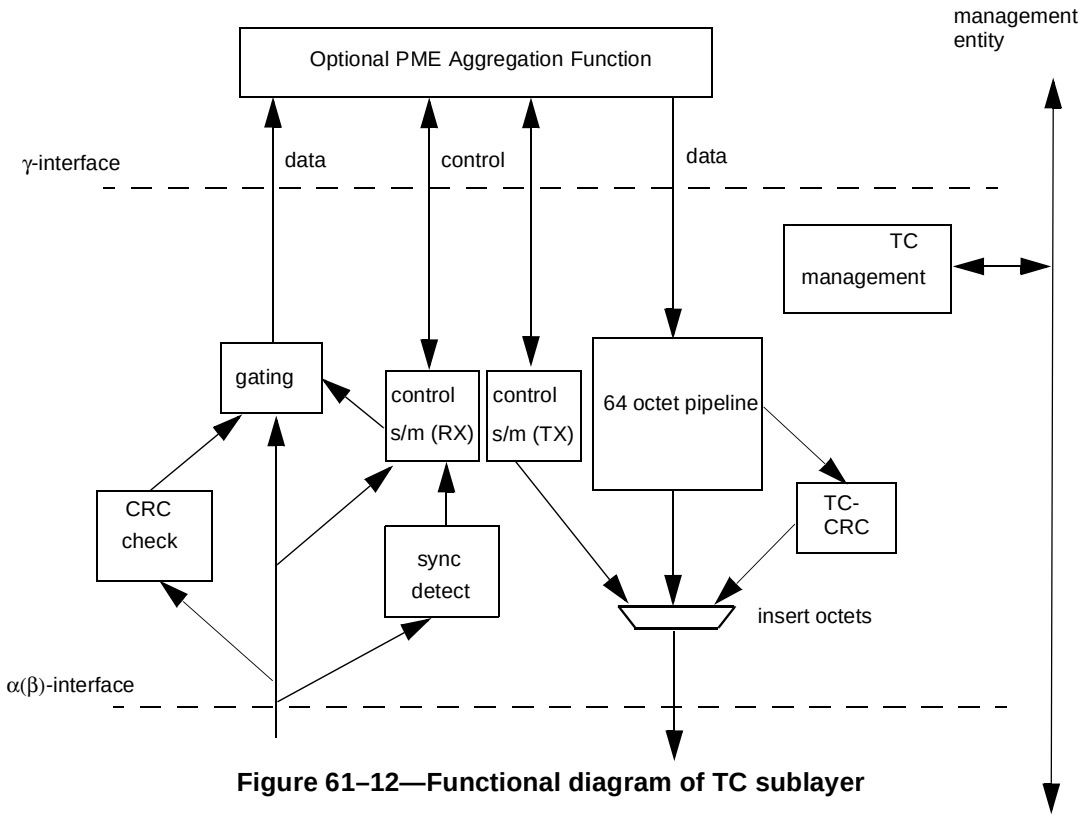


Figure 61–12—Functional diagram of TC sublayer

61.3.1 The γ-interface

The γ-interface is specified by incorporating section H.3.1 and all subsubsections of ITU-T Recommendation G.993.1 (Annex H) by reference, with the following exceptions and additions:

The PAF shall assert Tx_Avbl when an entire data fragment is available for transmission, and de-assert Tx_Avbl when there are no data fragments to transmit. Tx_Avbl shall never be de-asserted during the transmission of a data fragment.

OAM Information flow across the γ-interface supports access to registers referenced in Clause 45. Refer to Clause 45 for a complete description of access to TC, PMA and PMD registers from the MDIO interface.

Additional signals, which would be represented in the referenced document section H.3.1.4, are described in Table 61–9. Some of these signals may be unused when Clause 45 is not implemented.

Table 61–9—Additional γ-interface signals for OAM[a]

Signal	Size	Description	Direction
TC_link_state	1 bit	Control signal asserted when link is active and framing has synchronized according to the definition in 61.3.3 (TC_synchronized = TRUE) and remote_TC_out_of_sync (see 61.3.3.7) is not asserted.	TC → PAF
write_remote_aggregation_reg[b]	1 bit	Control signal to write PME_Aggregate_register. Active (min) 1 octet clock cycle	to PAF

Copyright © 2004 IEEE. All rights reserved.

Table 61–9—Additional γ-interface signals for OAM[a] *(continued)*

Signal	Size	Description	Direction
write_remote_discovery_reg[b]	1 bit	Control signal to write remote_discovery_register. Active (min) 1 octet clock cycle	to PAF
clear_remote_discovery_reg[b]	1 bit	Control signal to clear remote_discovery_register. Active (min) 1 octet clock cycle	to PAF
read_remote_aggregation_reg[b]	1 bit	Control signal to read PME_Aggregate_register. Active (min) 1 octet clock cycle	to PAF
read_remote_discovery_reg[b]	1 bit	Control signal to read remote_discovery_register. Active (min) 1 octet clock cycle	to PAF
remote_write_data_bus[b]	48 bit	Data bus for writing to PME aggregation registers. Valid during octet clock cycle when write control is asserted	to PAF
remote_read_data_bus[b]	48 bit	Data bus for the results of a read or atomic write function. Valid during octet clock cycle when Acknowledge_read_write or NAcknowledge read_write is asserted	from PAF
Acknowledge_read_write[b]	1 bit	Control signal responding (positively) to read or write. Active 1 octet clock cycle	from PAF
NAcknowledge read_write[b]	1 bit	Control signal responding (negatively) to read or write. Active 1 octet clock cycle	from PAF

[a]The term "OAM" as used here refers to the OAM facilities as defined in the referenced G.993.1 document.
[b]These signals are defined only if PAF is implemented, and then only in CPE subtypes. They are used only during G.994.1 handshake. For CO subtypes, pervasive access by management may be used to obtain the corresponding information. In case of read/write collision the PAF has to process the read/write-requests sequentially.

61.3.2 The α(β)-interface

The α(β)-interface is specified by incorporating section 7.1 and all subsections of ITU-T Recommendation G.993.1 by reference.

NOTE—An identical α(β)-interface is defined in ITU-T G.991.2.

The α and β reference points define interfaces between the PCS and PMA in the 2BASE-TL-O/10PASS-TS-O and the 2BASE-TL-R/10PASS-TS-R, respectively. Both interfaces are functional, application independent and identical. Both interfaces are defined by the following signal flow:

a) Data flow
b) Synchronization flow
c) OAM flow[13]

61.3.2.1 α(β) data flow: reference G.993.1 section 7.1.1

Referenced as is, with the additions shown in Table 61–10.

61.3.2.2 α(β) synchronization flow

The synchronization flow comprises the following synchronization signals:

a) Transmission data flow octet synchronization (Osync_t)

[13]The term "OAM" as used here refers to the OAM facilities as defined in the referenced G.993.1 document.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 398 of 717

Table 61–10— Additional α(β)-Interface signals

Signal(s)	Size	Description	Direction
PMA_receive_synchronized	1 bit	Receive PMA state machine synchronized	PMA → TC
PMA_PMD_type	8 bit[a]	Signal indicating PMA/PMD mode of operation. Defined values: 00_{16} — 10PASS-TS CO subtype 01_{16} — 2BASE-TL CO subtype 02_{16}–$7B_{16}$ — reserved for allocation by IEEE 802.3 $7C_{16}$–$7F_{16}$ — reserved for allocation by ATIS T1E1.4 80_{16} – 10PASS-TS CPE subtype 81_{16} – 2BASE-TL CPE subtype 82_{16}–FB_{16} — reserved for allocation by IEEE 802.3 FC_{16}–FF_{16} — reserved for allocation by ATIS T1E1.4	PMA → TC

[a]NOTE—The MSB of this octet-wide signal is used to differentiate between CO-subtype and CPE-subtype.

b) Reception data flow octet synchronization (Osync_r)
c) Transmit and receive data flow bit-synchronization (Clk_t, Clk_r), optional
d) Transmit and receive data flow frame-synchronization (Fsync_t, Fsync_r), optional.
e) Receive PMA state machine synchronized (PMA_receive_synchronized)

The synchronization signals are asserted by the PMA and directed towards the PCS. The synchronization flow signals are described in Table 61–10.

61.3.2.3 α(β) OAM flow[14]

The OAM Flow across the α(β)-interface exchanges OAM information between the PHY-OAM entity, the PMA and the PMD. The OAM flow is bidirectional and transports line related primitives, parameters, configuration setup and maintenance signals or commands.

Refer to Clause Clause 62 and Clause 63 for definitions of the G.994.1 messaging, Operation Channel (OC) and Indicator Bits (IB) mechanisms for accessing remote parameters.

Refer to Annex 61A for an example of aggregation discovery.

61.3.3 TC functions

The TC shall provide full transparent transfer of data fragments between γ_O-interface and γ_R-interface (except non-correctable errors caused by the transmission medium). It shall also provide fragment integrity and fragment error monitoring capability.

In the transmit direction, the TC receives fragments from the PAF via the γ-interface. An additional 16- or 32-bit CRC is calculated on the data and appended. The TC then performs 64/65-octet encapsulation, and sends the resulting codewords to the PMA via the α(β)-interface. In the receive direction, the TC receives codewords from the PMA via α(β)-interface, recovers the transported TC fragment, checks the CRC, and submits the extracted fragment to the PAF via the γ-interface.

An implementation is shown in Figure 61–13 and some example timing diagrams are shown in Figure 61–14.

[14]The term “OAM” as used here refers to the OAM facilities as defined in the referenced G.993.1 document.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 399 of 717

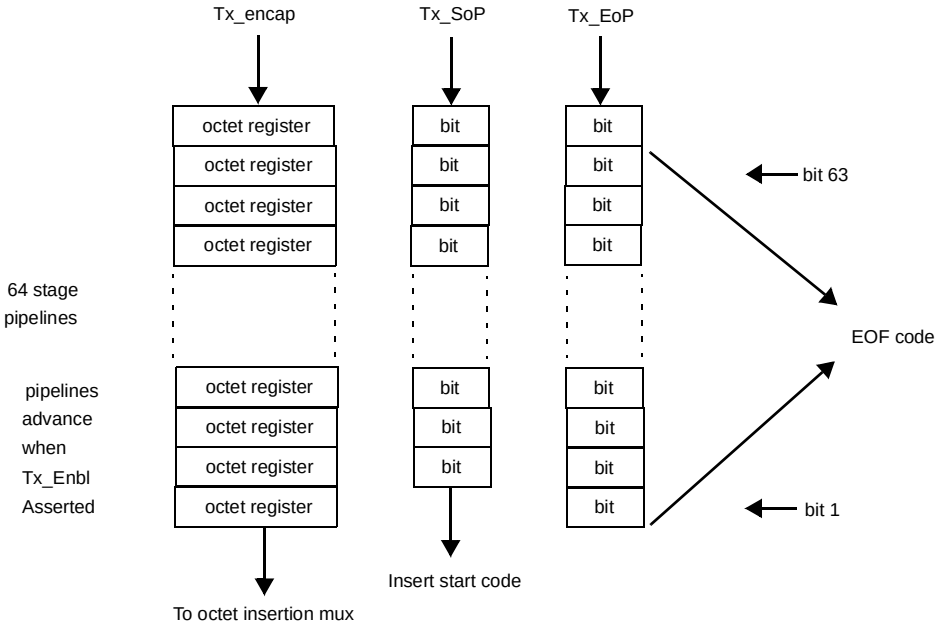


Figure 61–13—Example transmit pipeline

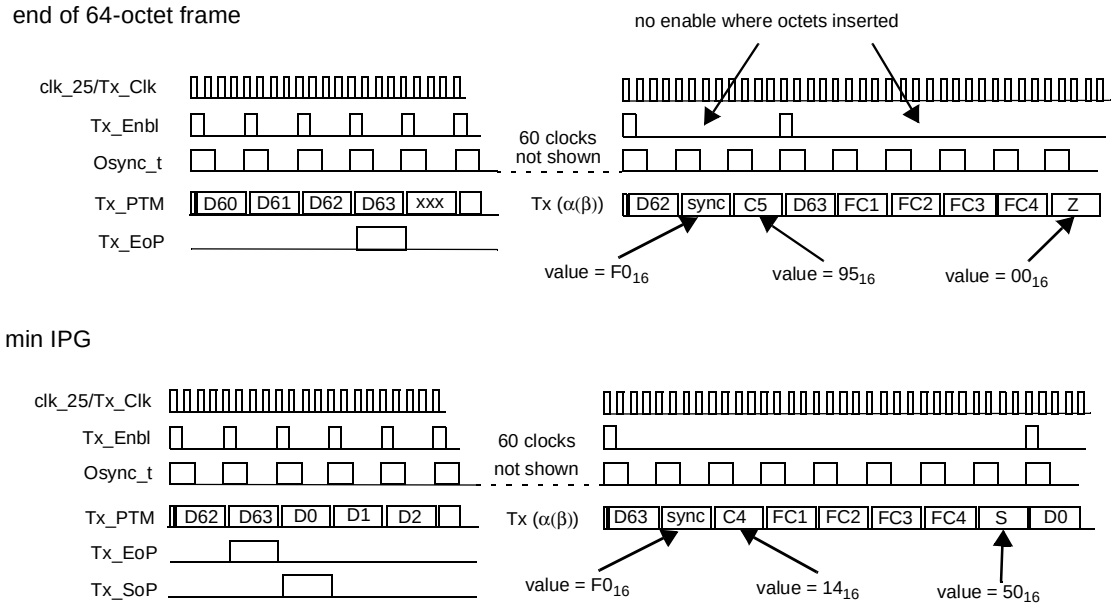


Figure 61–14—Example transmit timing

61.3.3.1 TC encapsulation and coding

A TC fragment consists of a fragment, followed by a 16- or 32-bit CRC (referred to as the TC-CRC) as defined in 61.3.3.3.

The TC coding function generates codewords with a fixed length of 65 octets (64/65-octet coding). A codeword consists of a Sync Octet and one of the following combinations:

a) all data: all of the octets in the codeword belong to the same TC fragment.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 400 of 717

b) end of frame (go to idle): up to 63 octets in the codeword belong to the same TC fragment, the rest of the codeword consists of Idle octets.
c) end of frame (start new frame): up to 62 octets in the codeword belong to the same TC fragment, a number of Idle octets and a single Start of Frame octet precede the first data octets of the next TC fragment.
d) idle: all of the octets in the codeword are Idle octets.
e) idle (start new frame): a number of Idle octets and a single Start of Frame octet precede up to 63 data octets of the next TC fragment.
f) out-of-sync idle: all of the octets in the codeword are idle octets and the 64/65-octet receive state machine is out-of-sync (TC_synchronized = FALSE).

Both transmit and receive data may be transferred across both the α(β) and the γ-interfaces at rates that are different from the rate across the MII; the frame buffering is managed in the sublayer above the γ-interface. The TC layer uses the γ-interface flow control signal, Tx_Enbl, to slow transmit data to the rate required for the encapsulated data across the α(β)-interface. The TC layer uses the γ-interface flow control signal, Rx_Enbl, to allow idle cycles in the flow of receive data across the γ-interface.

When a fragment arrives from the γ-interface while an End of Frame codeword is being transmitted, a Start of Frame octet shall be inserted prior to the transmission of data octets belonging to the next fragment. The Start of Frame octet *S* is distinct from the Idle octet *Z*. Valid locations for *S* are any valid location for *Z*, and the presence of an *S* rather than a *Z* octet indicates that what follows is the commencement of data for a new fragment.

No new fragment shall be transmitted when TC_link_state = FALSE (TC_link_state is defined in 61.3.3.7). If a fragment is being transmitted when TC_link_state becomes false, the End of Frame codeword completing the fragment shall not contain an *S* symbol after the end of the fragment. If an Idle codeword is being transmitted when TC_link_state becomes false, it shall be completed with *Z* symbols only. After the completed End of Frame or Idle codeword, only Out-of-Sync Idle codewords shall be transmitted until TC_link_state becomes true again.

The data and sync format of the encapsulated data is shown in Table 61–11.

Table 61–11—Codeword formats

Type	Frame Data	Sync Octet	Octet fields 1–64									
all data	*DDDD—DDDD*	$0F_{16}$	D_0	D_1	D_2	D_3	D_4	D_5	...	D_{61}	D_{62}	D_{63}
end of frame	contains *k D*'s, where *k* = 0 to 63	$F0_{16}$	C_k	D_0	D_1	D_2	D_3	...	D_{k-1}	*Z*	...	*Z*
start of frame while transmit-ting	contains last *k D*'s of 1st frame, where *k*=0 to 62; & first *j D*'s of 2nd frame, where *j*=0 to 62-*k*	$F0_{16}$	C_k	D_0	...	D_{k-1}	*Z*	...	*S*	D_0	...	D_{j-1}
all idle	ZZZZ—ZZZZ	$F0_{16}$	*Z*	*Z*	*Z*	*Z*	*Z*	*Z*	...	*Z*	*Z*	*Z*
start of frame while idle	contains *k D*'s, where *k*=0 to 63, and contains *j* Z's, where *j*=63-*k*	$F0_{16}$	*Z*	*Z*	*S*	D_0	D_1	...	...	D_{k-3}	D_{k-2}	D_{k-1}
all idle out-of-sync	YZZZ—ZZZZ	$F0_{16}$	*Y*	*Z*	*Z*	*Z*	*Z*	*Z*	...	*Z*	*Z*	*Z*

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 401 of 717


The end of a TC fragment is always marked with an "end of frame" or "start of frame while transmitting" codeword; e.g., the received sequence [All Data codeword][All Idle codeword] is considered a sequencing error. When any of the following events occur, signal TC_coding_error shall be asserted:

a) An incorrect octet is received when a Sync Octet is expected.
b) Outside a fragment, the received octet following a valid $F0_{16}$ sync is not a *Z*, *Y*, *S*;
c) Inside a fragment, the received octet following a valid $F0_{16}$ sync is not a valid value of C_k;
d) *Z* or *S* is expected, and a value different from *Z* and *S* is received.

Signal remote_TC_out_of_sync shall be asserted when *Y* is received after an expected $F0_{16}$ sync symbol, and remain asserted until the beginning of a codeword other than All Idle Out-of-Sync is detected.

NOTE—When the local TC is not synchronized (TC_synchronized = FALSE), it may fail to detect incoming "All Idle Out-of-Sync" codewords. However, this does not affect the behaviour of the local TC, which is sending "All Idle Out-of-Sync" codewords itself. Higher sublayers only use the combined signal TC_link_state, defined in 61.3.1.

Figure 61–15 illustrates two interesting examples. In the first example, the last 60 octets of a data frame, plus the 4 encapsulation CRC octets, are transmitted in an All Data codeword. In other words, the end of the (TC-CRC-augmented) frame coincides with the end of the codeword. In this case, the next codeword begins with Sync Octet equal to $F0_{16}$, C_k equal to C_0 (90_{16}). The second codeword indicates an End Of Frame, but with no additional data; in other words, the data in the previous codeword were the last of the frame. In the second example, the first octet of a frame is aligned with the first octet of an All Data codeword.

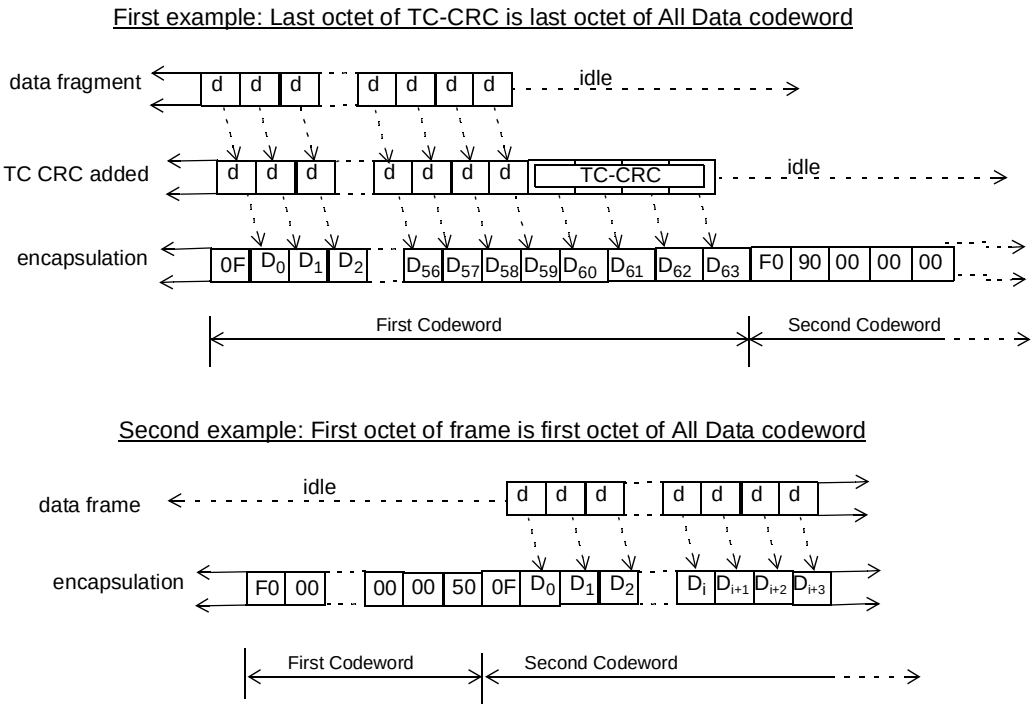

All octets other than D_x are written in hexadecimal notation.

Figure 61–15—TC Encapsulation examples

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 402 of 717

The values of the TC control characters are shown in Table 61–12.

Table 61–12—TC control character values

Character	Value
Z	00_{16}
C_k, k=0–63	$C_k = k+10_{16}$, with MSB set so that resulting value has even parity; $C_0=90_{16}$, $C_1=11_{16}$, $C_2=12_{16}$, $C_3=93_{16}$, ... $C_{62}=4E_{16}$, $C_{63}=CF_{16}$
Y	$D1_{16}$
S	50_{16}
R	All other values[a]

[a]See the state diagram for the 64/65-octet receive function (Figure 61–19) for required action when receiving reserved codewords.

61.3.3.2 Sync insertion and transmit control

The transmit data path needs a 64 stage pipeline in order to generate the appropriate sync octet along with an end-of-frame indicator when required. The flow control signal, Tx_Enbl, is used to slow the flow of data across the γ-interface to cater for the difference in clock speed between the α(β)-interface and the γ-interface and also to allow for the insertion of sync octets and CRC codes into the data stream.

A simple implementation may use a 64 bit pipeline for the Tx_EOP control signal. In that case, an end of frame sync code ($F0_{16}$, then C_k) would be inserted whenever a bit is set in stages 63 to 1 of the pipeline (stage 64 is the first stage). The value of C_k inserted would be such that k is equal to the stage number of the bit that is set.

Some implementations may optimize the insertions of idles between fragments. In particular an implementation may remove idle characters between fragments to increase the effective bandwith of the channel.

If PMA/PMD link status is not Up (i.e. either Down or Initializing), the TC sublayer shall transmit only Out-of-Sync Idle codewords. The PMA/PMD link status is defined in 45.2.1.12.4.

61.3.3.3 TC-CRC functions

The TC-CRC is generated for the entire payload fragment including any attached header (from PAF), including the Ethernet CRC; i.e., the TC-CRC is computed over octets from the first octet of the PAF header (if present), or the first octet of the DestinationAddress (in the case where the PAF header not present), to the last octet of the Ethernet CRC (for a frame) or the last octet of the fragment (if PAF fragmentation is operating), inclusive. The TC-CRC is added to the data stream after the end of the fragment in the transmit direction. The TC-CRC is checked against the last 2 or 4 octets of the fragment in the receive direction. If the receive TC-CRC is incorrect then Rx_Err is asserted to signal that the fragment is errored.

The encoding for 2BASE-TL is defined by the following generating polynomial.

$$x^{32}+x^{28}+x^{27}+x^{26}+x^{25}+x^{23}+x^{22}+x^{20}+x^{19}+ \quad (61\text{–}1)$$
$$x^{18}+x^{14}+x^{13}+x^{11}+x^{10}+x^{9}+x^{8}+x^{6}+1 =$$
$$(x+1)(x^{31}+x^{30}+x^{29}+x^{28}+x^{26}+x^{24}+x^{23}+x^{21}+x^{20}+x^{18}+x^{13}+x^{10}+x^{8}+x^{5}+x^{4}+x^{3}+x^{2}+x+1)$$

The encoding for 10PASS-TS is defined by the following generating polynomial.[15]

$$x^{16}+x^{12}+x^{5}+1 \quad (61\text{–}2)$$

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 403 of 717

Mathematically, the TC-CRC value corresponding to a given payload fragment (including any attached header) is defined by the following procedure:

a) The first 32 bits (in the case of 2BASE-TL) or the first 16 bits (in the case of 10PASS-TS) of the payload are complemented.
b) The n bits of the payload are then considered to be the coefficients of a polynomial M(x) of degree n–1. (e.g., the first bit of the fragment corresponds to the x^{n-1} term and the last bit of the fragment corresponds to the x^0 term.)
c) $M(x)$ is multiplied by x^{32} (in the case of 2BASE-TL), or by x^{16} (in the case of 10PASS-TS), and divided by $G(x)$, the TC-CRC polynomial, producing a remainder $R(x)$ of degree 31 (in the case of 2BASE-TL), or degree 15 (in the case of 10PASS-TS).
d) The coefficients of $R(x)$ are considered to be a 32-bit sequence (in the case of 2BASE-TL), or a 16-bit sequence (in the case of 10PASS-TS).
e) The bit sequence is complemented and the result is the TC-CRC.

In the case of 2BASE-TL, the 32 bits of the TC-CRC value are placed so that the x^{31} term is the bit in position b_8 on the α(β)-interface (as shown in Figure 61–16) of the first octet, and the x^0 term is the bit in position b_1 on the α(β)-interface (as shown in Figure 61–16) of the last octet. (The bits of the CRC are thus transmitted in the order x^{31}, x^{30},.., x^1, x^0). At the receiver, a payload received without error will result in the remainder $1C2D19ED_{16}$ when divided by $G(x)$.

In the case of 10PASS-TS, the 16 bits of the TC-CRC value are placed so that the x^{15} term is the bit in position b_8 on the α(β)-interface (as shown in Figure 61–16) of the first octet, and the x^0 term is the bit in position b_1 on the α(β)-interface (as shown in Figure 61–16) of the last octet. (The bits of the CRC are thus transmitted in the order x^{15}, x^{14},.., x^1, x^0). At the receiver, a payload received without error will result in the remainder $1D0F_{16}$ when divided by $G(x)$.

If, in the transmitter, the TX_Err signal is asserted during the transmission of the fragment across the γ-interface, the last octet of the TC-CRC shall be ones-complemented (i.e., intentionally corrupted by inverting all the bits of the last octet).

61.3.3.4 Bit ordering

In the transmitter, after encapsulation into 64/65-octet codewords, bits within each octet are labelled from b_1 to b_8, with the MSB labelled as b_1, the LSB labelled as b_8, and intervening bits labelled accordingly. In keeping with the labelling convention for the α(β)-interface in ITU-T Recommendations, bit b_8 is regarded as the MSB at the α(β)-interface, and is transmitted first if the α(β)-interface is serial by implementation.

Observe that the TC functionality defines a correspondence between the LSB at the γ-interface and b_8, between the next-order bit and b_7, etc., in order to conform to the Ethernet bit order convention of transmitting LSB first. See also H.4.1.1 in Annex H of ITU-T Recommendation G.993.1. In transmitting and calculating the TC-CRC, the octets at the γ-interface are processed LSB first.

[15]For 10PASS-TS, a 16-bit TC-CRC is sufficient for detecting payload errors, as the error-detecting capabilities of its Reed-Solomon decoder is also employed (see 61.2.3.3.8). In 2BASE-TL PHYs, a Reed-Solomon decoder is not present, hence a stronger TC-CRC is required.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 404 of 717

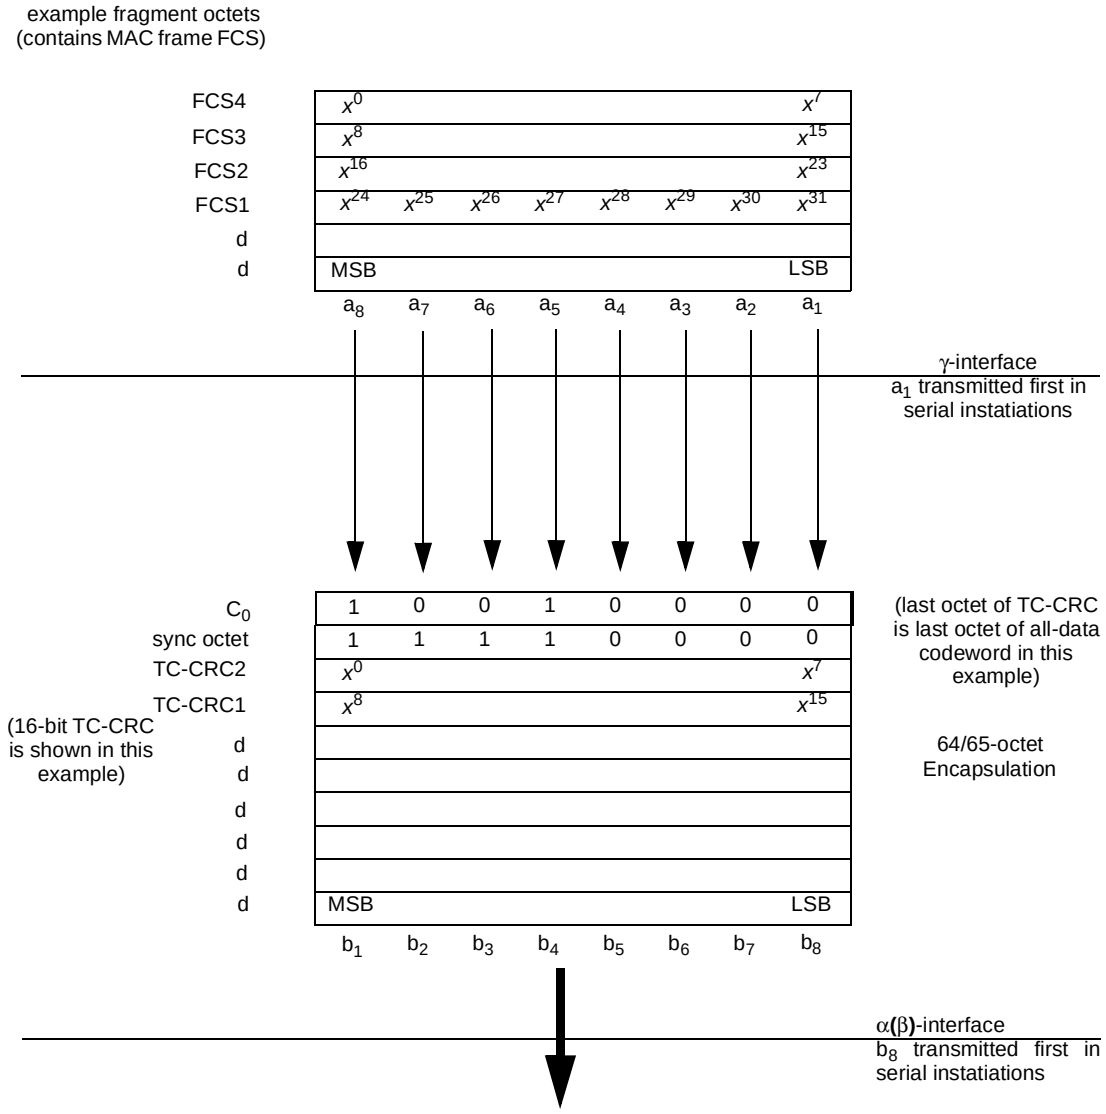


Figure 61–16—γ-interface to α(β)-interface bit ordering

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 405 of 717

61.3.3.5 Sync detection

The sync detection function serves two purposes. Firstly, the synchronization is acquired from the incoming data stream, the sync detection function controls the initial acquisition and maintenance of the synchronization. Secondly, the sync detection is needed so that the receive control state machine can extract framing information from the receive data stream and remove the sync characters and CRC codes. The sync detection state machine is shown in Figure 61–17.

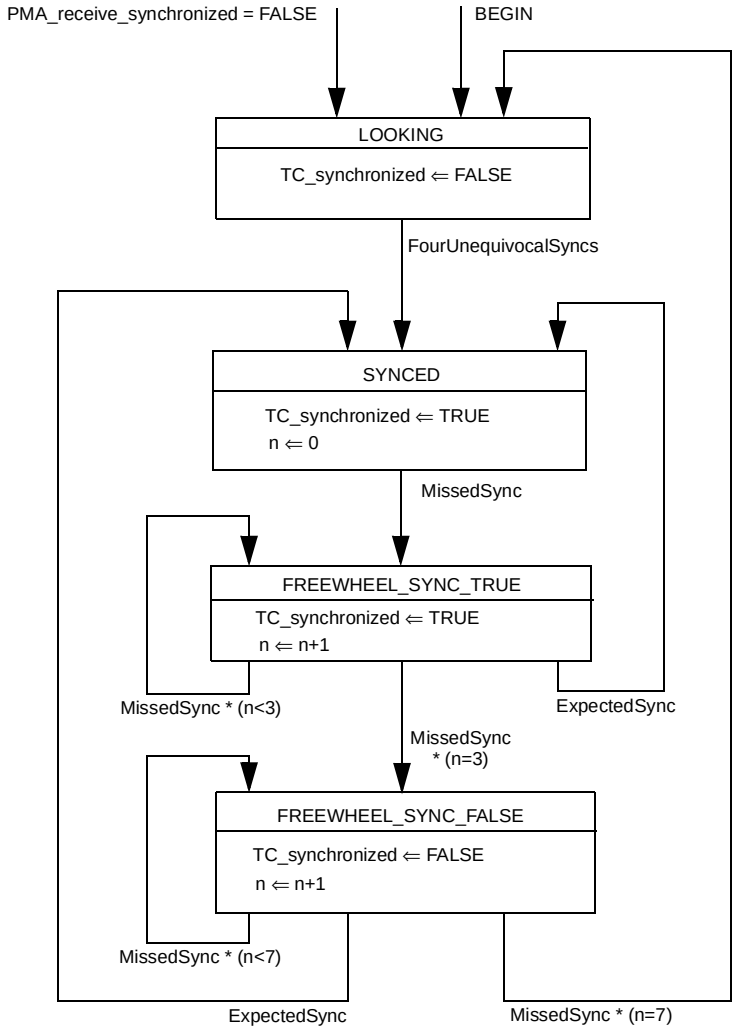


Figure 61–17—Sync detect state machine

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 406 of 717

61.3.3.5.1 State diagram variables

BEGIN

A variable that resets the functions within the sync detection function(see 45.2.6.1.1.)
TRUE when the TC sublayer is reset.
FALSE when (re-)initialization has completed.

ExpectedSync

variable of type boolean, TRUE indicating the occurrence of a sync character in the correct position in the octet stream. The default value of this variable is FALSE; the value of the variable resets to FALSE on every state transition.

FourUnequivocalSyncs

variable of type boolean, TRUE indicating the occurrence of a 196-octet sequence with the following two characteristics:

a) the sequence is of the form <sync><data><sync><data><sync><data><sync>, where each <sync> is $0F_{16}$ or $F0_{16}$ and each <data> is 64 octets of any value;
b) the pattern <sync><data><sync><data><sync> occurs nowhere in the sequence, where <sync> and <data> are as defined in (a, unless the <sync> values are coincident with those in (a;

The default value of this variable is FALSE; the value of the variable resets to FALSE on every state transition.

MissedSync

variable of type boolean, TRUE indicating the occurrence of a non-sync character in the octet stream position where a sync character is expected. The default value of this variable is FALSE; the value of the variable resets to FALSE on every state transition.

n

variable of type integer, counting the occurrences of MissedSync = TRUE, used to determine when to leave state FREEWHEEL_SYNC_TRUE or FREEWHEEL_SYNC_FALSE.

PMA_receive_synchronized

signal of the $\alpha(\beta)$-interface, see 61.3.2.

TC_synchronized

variable of type boolean, TRUE indicating that the state machine is in state SYNCED or FREEWHEEL_SYNC_TRUE. This variable is used to calculate the value of signal TC_link_state on the γ-interface (see 61.3.1), and to generate “All Idle Out Of Sync” codewords in the 64/65-octet transmit function (see Figure 61–18).

61.3.3.5.2 State diagram

The receiver shall implement the sync detect state machine shown in Figure 61–17.

61.3.3.6 Receive control

The receive control function removes the sync characters and encapsulation CRC octets from the data stream and passes it upward across the γ-interface. If TC_synchronized = false then signal RX_Enbl shall be de-asserted. If a CRC error is detected the receive controller shall assert signal TC_CRC_error. The receive controller shall assert signal RX_Err at the γ-interface during at least one octet of a fragment as it is passed up across the γ-interface, if TC_CRC_error is asserted, or if the fragment contains data from a block of data in which the PMA detected errors, but did not correct them (the means by which the PHY passes this information from the PMA to the TC is unspecified).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 407 of 717

61.3.3.7 State diagrams for 64/65-octet encapsulation

This subclause contains the state diagrams for the 64/65-octet encapsulation function. Only the signals that affect the operation of the state machines are explicitly mentioned in the state diagrams. Other signals are to be set and read in accordance with the specifications of the γ-interface (see 61.3.1) and the α(β)-interface (see 61.3.2).

61.3.3.7.1 Transmit state diagram

The following variables are used in the state diagram.

BEGIN
: A variable that resets the functions within the sync detection function.
TRUE when the TC-sublayer sublayer is reset.
FALSE when (re-)initialization has completed.

k
: variable of type integer, used to keep track of the number of octets used in the current code-word, not including the sync symbols

loop
: variable of type boolean, keeping track of the fact that an Out-of-Sync Idle codeword is being transmitted, thus preventing a Start-of-Frame to occur within this codeword (initial value is TRUE).

TC_link_state
: variable of type boolean, indicating the current state of the TC_link_state signal on the γ-interface

TC_link_stateCHANGE
: This function monitors the TC_link_state variable for a state change. The function is set to TRUE on state change detection.
Values:
TRUE; A TC_link_state variable state change has been detected.
FALSE; A TC_link_state variable state change has not been detected (default).

NOTE—TC_link_stateCHANGE is set by this function definition; it is not set explicitly in the state diagrams. TC_link_stateCHANGE evaluates to its default value upon state entry.

TC_synchronized
: variable of type boolean, indicating whether synchronization has been acquired (as used in Figure 61–17)

Tx_Avbl
: variable of type boolean, indicating the current state of the Tx_Avbl (transmit data available) signal on γ-interface

Tx_EoP
: variable of type boolean, indicating the current state of the Tx_EoP (end of packet) signal on γ-interface

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 408 of 717

The following functions are used in the state diagram.

flushBuffer()
: function that removes any octets that have been pulled from the PCS by the function pullOctet() from the transmit fifo.

pullOctet()
: function that receives a single octet of data from the γ-interface. This function takes one cycle of the Tx_Enbl (transmit enable) signal (see 61.3.1) to complete. At the end of a fragment, this function returns the octets of the TC-CRC in the order specified in 61.3.3.3.

transmitAllDataSync()
: function that transmits the all-data sync symbol ($0F_{16}$) to the α(β)-interface. This function takes one cycle of the Osync_t signal (see 61.3.2.2) to complete.

transmitC(int k)
: function that transmits the C_k symbol as specified in Table 61-10 to the α(β)-interface. This function takes one cycle of the Osync_t signal (see 61.3.2.2) to complete.

transmitData()
: function that transmits all data currently in the transmit fifo to the α(β)-interface. This function takes one cycle of the Osync_t signal (see 61.3.2.2) per octet of data transmitted to complete.

transmitS()
: function that transmits the *S* symbol as specified in Table 61–12 to the α(β)-interface. This function takes one cycle of the Osync_t signal (see 61.3.2.2) to complete.

transmitSync()
: function that transmits the regular sync symbol ($F0_{16}$) to the α(β)-interface. This function takes one cycle of the Osync_t signal (see 61.3.2.2) to complete.

transmitZ(int k, boolean loop)
: function that transmits the *Y* symbol ($D1_{16}$) to the α(β)-interface if (k=1) and (loop=TRUE), and transmits the *Z* symbol (00_{16}) to the α(β)-interface otherwise. This function takes one cycle of the Osync_t signal (see 61.3.2.2) to complete.

Figure 61–18 specifies the 64/65-octet encapsulation (transmit) function.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 409 of 717

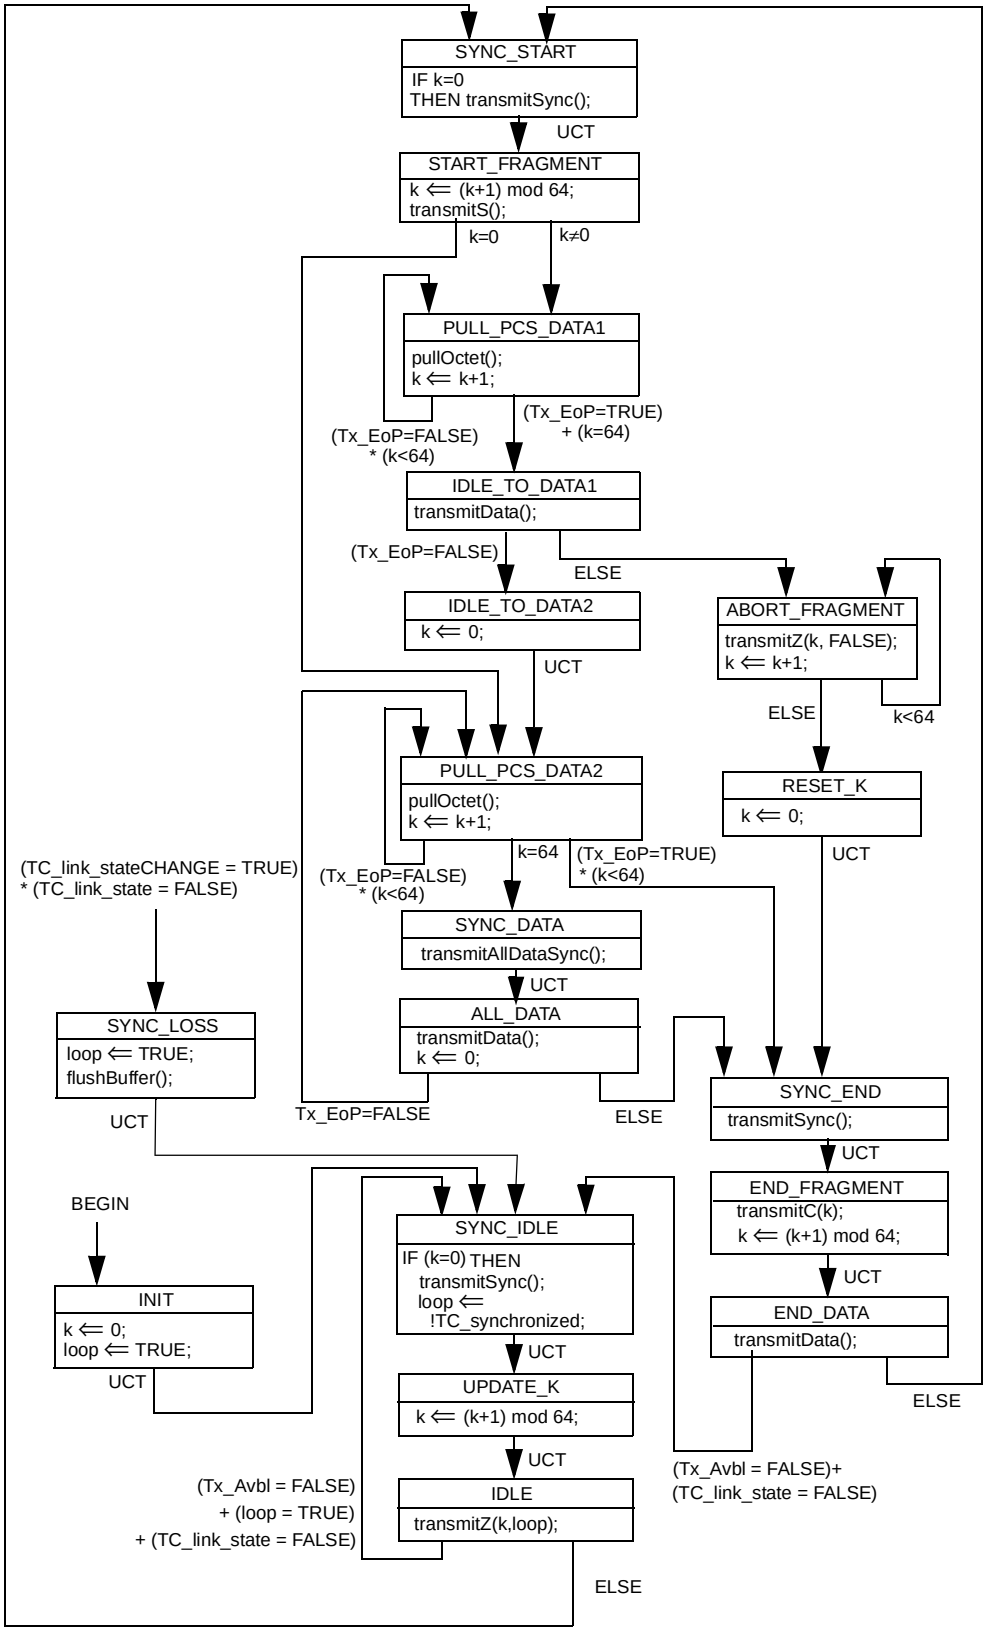


Figure 61–18—State diagram for 64/65-octet transmit function

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 410 of 717

61.3.3.7.2 Receive state diagram

The following variables are used in the state diagram.

B
: variable of type octet, used to store a single received octet

C
: variable of type octet, used to store a received C_k symbol

codingViolation
: variable of type boolean, used to mark detection of a coding violation when a sync octet was expected

expectedSync
: variable of type boolean, used to mark successful sync octet detections, which are counted towards achieving synchronization as specified in Figure 61–17. The default value of this variable is FALSE; it returns to FALSE on every state transition.

k
: variable of type integer, used to keep track of the number of octets received in the current code-word, not including the sync symbols

kmax
: variable of type integer, used to store the decoded value of a C_k symbol

missedSync
: variable of type boolean, used to mark unsuccessful sync octet detections, which are counted towards losing synchronization as specified in Figure 61–17. The default value of this variable is FALSE; it returns to FALSE on every state transition.

remote_TC_out_of_sync
: variable of type boolean, representing the state of the remote TC synchronization state machine (see 45.2.6.13).
TRUE if the remote TC has lost synchronization according to 61.3.3.5
FALSE if the remote TC has acquired synchronization according to 61.3.3.5

Rx_Err
: variable of type boolean, representing the corresponding signal (receive error) on the γ-interface

TC_coding_error
: when this signal is asserted, the TPS-TC coding violations counter register is incremented (see 45.2.6.12). The default value of this variable is FALSE; it returns to FALSE on every state transition. If TC_coding_error becomes true during the reception of a fragment, Rx_Err is asserted on the γ-interface to signal this condition to the PCS, thus invalidating the entire fragment.

TC_synchronized
: variable of type boolean, identical to the variable TC_synchronized defined in 61.3.3.7.1.

TC_synchronizedCHANGE
: This function monitors the TC_synchronized variable for a state change. The function is set to TRUE on state change detection.
Values:
TRUE; A TC_synchronized variable state change has been detected.
FALSE; A TC_synchronized variable state change has not been detected (default).

NOTE—TC_synchronizedCHANGE is set by this function definition; it is not set explicitly in the state diagrams. TC_synchronizedCHANGE evaluates to its default value upon state entry.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 411 of 717

The following functions are used in the state diagram.

decode(octet B)
: function that decodes the C_k symbol as specified in Table 61–12. A return value between 0 and 63 indicates a valid C_k symbol was read.

receiveOctet()
: function that receives a single octet of data over the $\alpha(\beta)$-interface. This function takes one cycle of the Osync_r signal (see 61.3.2.2) to complete.

sendOctetToPCS()
: function that sends a single octet of data over an internal γ-interface to an intermediate fifo. The size of the intermediate fifo is more than 2 octets for 10PASS-TS and more than 4 octets for 2BASE-TL. Data is transmitted at the same rate from the intermediate fifo to the PAF (if present) over the γ-interface. This function takes one cycle of the Rx_clk (receive clock) signal (see 61.3.1) to complete. At the end of a fragment, the fifo contains the TC_CRC octets. The TC_CRC octets are never forwarded over the γ-interface. After verification of the TC_CRC octets, the result of the TC_CRC verification is signalled to the PAF (if present) over the γ-interface.

Figure 61–19 specifies the 64/65-octet decapsulation (receive) function.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 412 of 717

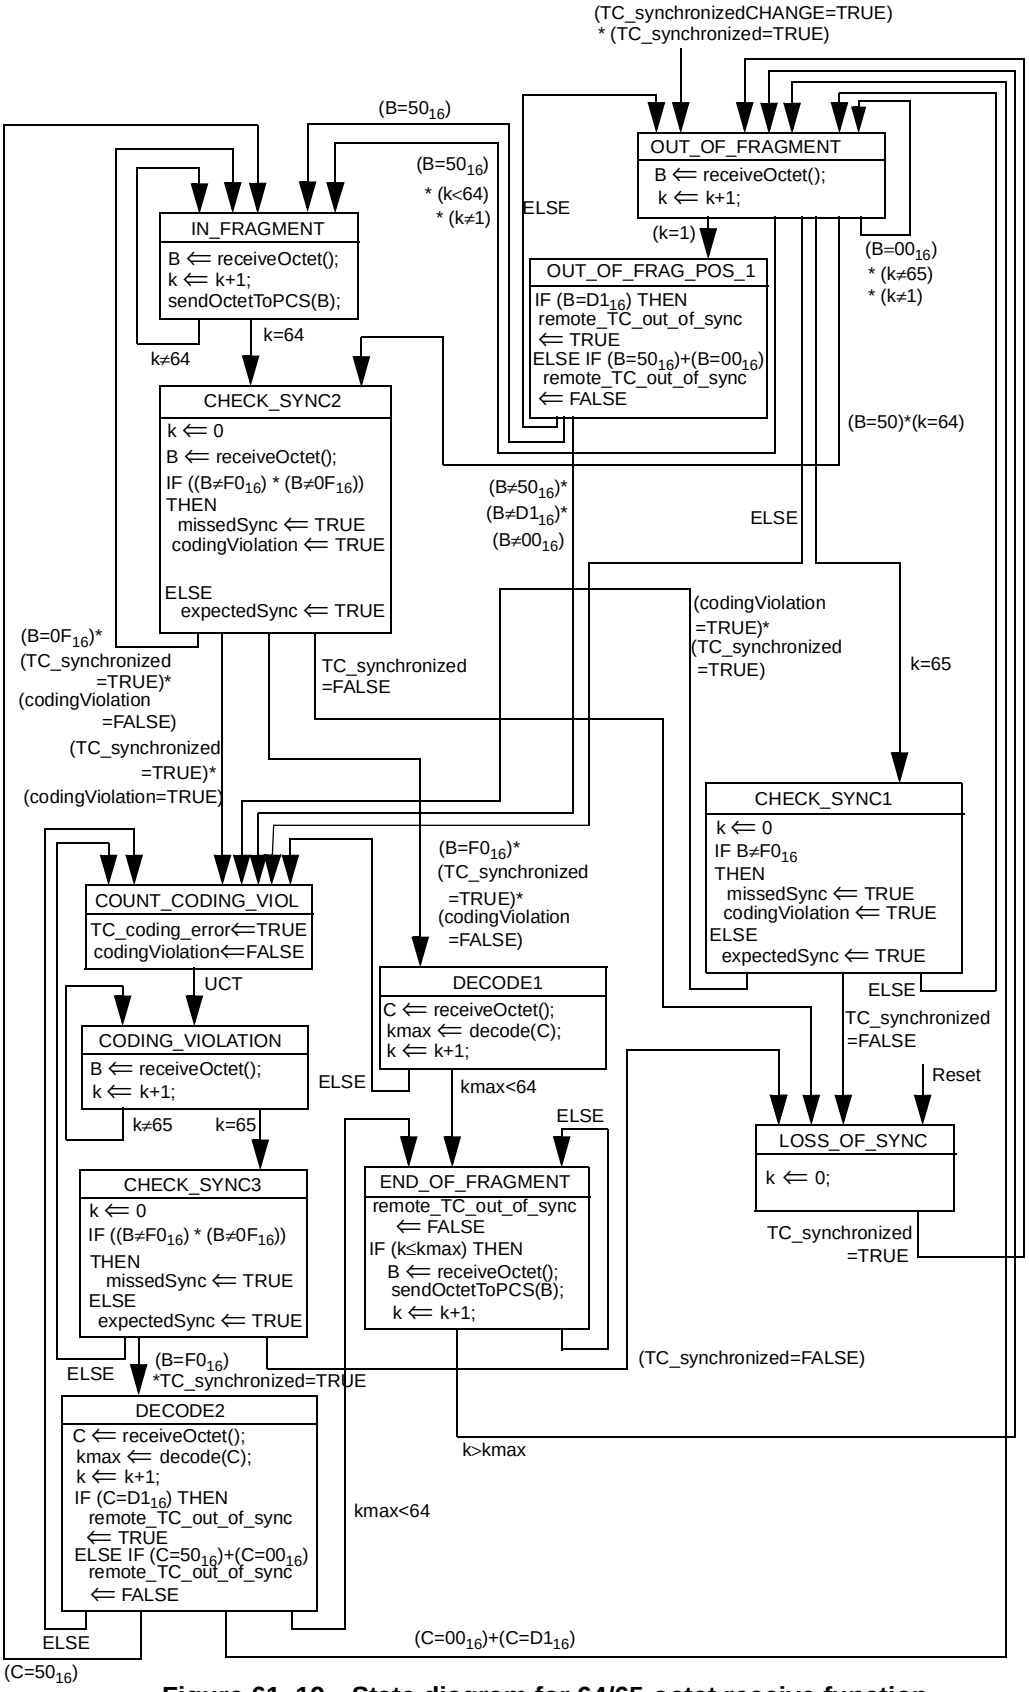


Figure 61–19—State diagram for 64/65-octet receive function

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 413 of 717

61.3.3.8 TC sublayer management entity signals

The following TC sublayer signals are mapped to Clause 45 registers or cause Clause 45 counters to increment:

remote_TC_out_of_sync
: (for each PMA, γ-interface) this signal is asserted to indicate that the remote TC has signaled loss-of-sync. See Figure 61–19 and 45.2.6.13.

TC_synchronized
: (for each PMA, γ-interface) this signal is asserted to indicate that the state machine has achieved codeword synchronization. See Figure 61–17 and 45.2.6.10.

TC_CRC_error
: (for each PMA, γ-interface) this signal is asserted to indicate that the synchronization state machine has detected a false CRC code for a received frame (see 45.2.6.11).

TC_coding_error
: (for each PMA, γ-interface) this signal is asserted to indicate that a coding violation has been detected in the received octet stream (see 45.2.6.12).

61.4 Handshaking and PHY control specification for type 2BASE-TL and 10PASS-TS

61.4.1 Overview

This subclause defines the startup and handshaking procedures by incorporating ITU-T Recommendation G.994.1 by reference, with the exceptions listed below. Where there is conflict between specifications in G.994.1 and those in this standard, those of this standard will prevail. The G.994.1 parameter values and options to be used by 2BASE-TL and 10PASS-TS are specified here.

At the time of publication, G.994.1 Revision 3 (2004) is in force. Earlier Revisions of this Recommendation shall not be implemented in 2BASE-TL or 10PASS-TS.

61.4.2 Replacement of 1, “Scope”

61.4.2.1 Scope

This subclause defines signals, messages, and procedures for exchanging these between 2BASE-TL and 10PASS-TS port types, when the modes of operation of the equipment need to be automatically established and selected, but before signals are exchanged which are specific to a particular port type.

The startup procedures defined here are compatible with those used by other equipment on the public access network, such as DSL transceivers compliant with ITU-T Recommendations. For interrelationships of this subclause with ITU-T G.99x-series Recommendations, see Recommendation G.995.1 (informative).

The principal characteristics of this subclause are as follows:

a) use over metallic local loops;
b) provisions to exchange capabilities information between DSL equipment and EFM PHYs to identify common modes of operation;
c) provisions for equipment at either end of the loop to select a common mode of operation or to request the other end to select the mode;
d) provisions for exchanging non-standard information between equipment;
e) provisions to exchange and request service and application related information;
f) support for both duplex and half-duplex transmission modes;
g) support for multi-pair operation;
h) provisions for equipment at the remote end of the loop (xTU-R) to propose a common mode of operation.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 414 of 717

61.4.2.2 Purpose

It is the goal of the ITU-T that all specifications for digital transceivers for use on public telephone network copper subscriber lines use G.994.1 for startup. G.994.1 procedures allow for a common mechanism for identification of available features, exchange of capabilities and configuration information, and selection of operating mode. As the two loop endpoints are usually separated by a large distance (e.g., in separate buildings) and often owned and installed by different entities, G.994.1 also aids in diagnosing interoperability problems. G.994.1 codespaces have been assigned by ITU-T to ATIS, ETSI, and IEEE 802.3 in support of this goal.

In private networks, the management entity may additionally use G.994.1 tones or messages to autoconfigure the subtype (CO or CPE) in devices which implement both (see 61.1).

61.4.3 Changes to 6.1, "Description of signals"

NOTE 4 and NOTE 5 are not applicable.

Replace paragraph 3 of 6.1.1, "4.3125 kHz signalling family" with the following.

The carrier sets in this family are mandatory for the port types listed in Table 61–13. One or more carriers listed in Reference Table 1 or Reference Table 3 may be transmitted in addition to the mandatory carrier set listed in Table 61–13. Carriers not listed in Reference Table 1 or Reference Table 3 shall not be transmitted.

Table 61–13—Mandatory carrier sets

Port Types	Carrier set designation
10PASS-TS	V43

Replace paragraph 3 of section 6.1.2, "4 kHz signalling family" with the following.

The carrier sets in this family are mandatory for the port types listed in Table 61–14. One or more carriers listed in Reference Table 1 or Reference Table 3 may be transmitted in addition to the mandatory carrier set listed in Table 61–14. Carriers not listed in Reference Table 1 or Reference Table 3 shall not be transmitted.

Table 61–14—Mandatory carrier sets

Port Types	Carrier set designation
2BASE-TL	A4

61.4.4 Changes to 9.4, "Standard information field (S)"

Paragraphs 1–5: referenced as is.

Table 11.1 to Table 11.52 and Table 11-57 and beyond are not applicable.

The Standard information field (S) codepoints specified in Annex 61B shall be used in the transactions specified in this subclause.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 415 of 717

61.4.5 Changes to 9.5, "Non-standard information field (NS)"

Add this paragraph: The contents of the NS information field are outside the scope of this standard.

61.4.6 Changes to Annex A–B and Appendix I–VI

Annex A / G.994.1 - Support for legacy non-G.994.1 devices - not applicable

Annex B / G.994.1 - operation over multiple wire pairs - not applicable to the multipair operation for EFM

Appendix I / G.994.1 - not applicable

Appendix II / G.994.1 - Provider Code contact Information - Referenced as is.

Appendix III / G.994.1 - support for legacy DMT-based devices - not applicable

Appendix IV / G.994.1 - Procedure for the assignment of additional G.994.1 parameters - not applicable

Appendix V / G.994.1 - Rules for code point table numbering - not applicable

Appendix VI / G.994.1 - Bibliography

61.4.7 PME Aggregation – remote access of PME Aggregation registers

As the CO-subtype accesses PME Aggregation registers (i.e., remote_discovery_register and PME_Aggregate_register) in the CPE-subtype prior to training and establishment of the PMD-to-PMD link, it is performed using G.994.1 handshake messages.

The G.994.1 handshake messages described in this subclause shall assert the "Ethernet bonding" NPar(2) codepoint if and only if PAF_available is asserted. The "TDIM Bonding" NPar(2) bit shall be deasserted. In addition, the "Ethernet bonding" NPar(2) codepoint shall be asserted by the -O device in an MS message if and only if PAF_enable is asserted.

NOTES
1—A G.994.1 session including configuration of the PME Aggregation Function may violate the maximum activation time specified for SHDSL transceivers by ITU-T Recommendation G.991.2.
2—In the transactions specified in this subclause, each CLR message may be preceded by MR/REQ-CLR messages. Each CL message is followed by an ACK(1). These messages are not shown in the diagrams.

61.4.7.1 Remote_discovery_register

2BASE-TL-R and 10PASS-TS-R PHYs shall assert the PME Aggregation Discovery SPar(2) bit in all G.994.1 CLR messages, if and only if its local PAF_available bit is set. CPE-subtypes shall place the contents of the remote_discovery_register in the corresponding NPar(3) bits in the outgoing CLR message, with the "Clear if Same" NPar(3) set to zero.

In response to a "Get" command, the CO-subtype shall perform a G.994.1 capabilities exchange with the CPE-subtype. The contents of the NPar(3) remote_discovery_register bits in the CLR message received from the CPE-subtype shall be reported as the result. The CL message sent by the CO-subtype in response to the CLR shall have the PME Aggregation Discovery SPar(2) bit set to zero.

In response to a "Set if Clear" command, the CO-subtype shall perform two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar(3) remote_discovery_register bits in the first CLR message received from the CPE-subtype shall be ignored. The CL message sent by the CO-subtype in response to this first CLR shall have the PME Aggregation Discovery SPar(2) bit set to one, the Clear if Same NPar(3) bit set to zero, and the NPar(3) remote_discovery_register bits set to the CO-subtype

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 416 of 717

PME Aggregation Discovery Code register. The CPE-subtype shall set the remote_discovery register to this value if it is currently clear. The contents of the NPar(3) remote_discovery_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange shall be reported as the result. The CL message sent by the CO-subtype in response to this second CLR shall have the PME Aggregation Discovery SPar(2) bit set to zero.

In response to a "Clear if Same" command, the CO-subtype shall perform two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar(3) remote_discovery_register bits in the first CLR message received from the CPE-subtype shall be ignored. The CL message sent by the CO-subtype in response to this first CLR shall have the PME Aggregation Discovery SPar(2) bit set to one, the Clear if Same NPar(3) bit set to one, and the NPar(3) remote_discovery_register bits set to the CO-subtype PME Aggregation Discovery Code register. The CPE-subtype shall clear the remote_discovery register if it is currently equal to this value. The contents of the NPar(3) remote_discovery_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange shall be reported as the result. The CL message sent by the CO-subtype in response to this second CLR shall have the PME Aggregation Discovery SPar(2) bit set to zero.

Figure 61–20 illustrates the relevant sequences of G.994.1 transactions.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 417 of 717

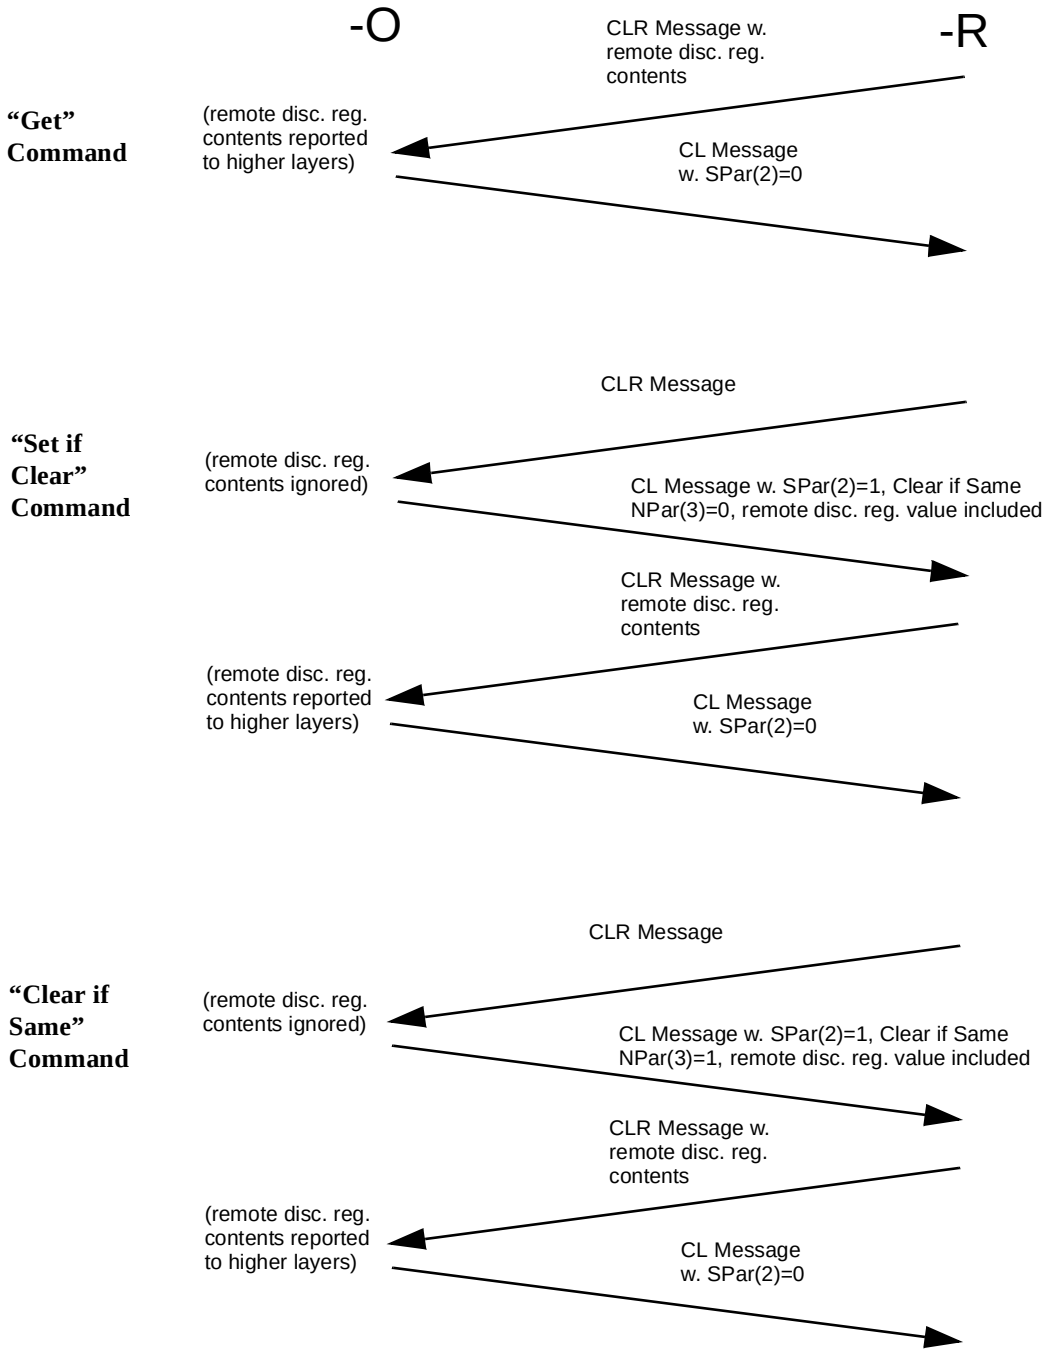


Figure 61–20—G.994.1 transactions for remote_discovery_register access

61.4.7.2 PME_Aggregate_register

2BASE-TL-R and 10PASS-TS-R PHYs shall assert the PME Aggregation SPar(2) bit in all G.994.1 CLR messages, if and only if its local PAF_available bit is set. CPE-subtypes shall place the contents of the PME_Aggregate_register in the corresponding NPar(3) bits in the outgoing CLR message.

In response to a "get" command, the CO-subtype shall perform a G.994.1 capabilities exchange with the CPE-subtype. The contents of the NPar(3) PME_Aggregate_register bits in the CLR message received from the CPE-subtype shall be reported as the result. The CL message sent by the CO-subtype in response to the CLR shall have the PME Aggregation SPar(2) bit set to zero.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 418 of 717

In response to a “set” command, the CO-subtype shall perform two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar(3) PME_Aggregate_register bits in the first CLR message received from the CPE-subtype shall be ignored. The CL message sent by the CO-subtype in response to this first CLR shall have the PME Aggregation SPar(2) bit set to one and the NPar(3) PME_Aggregate_register bit zero. The -R device sets the bit position in the PME_Aggregate_register corresponding to the PME upon which the G.994.1 exchange takes place. The contents of the NPar(3) PME_Aggregate_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange shall be reported as the result. The CL message sent by the CO-subtype in response to this second CLR shall have the PME Aggregation SPar(2) bit set to zero.

61.4.7.3 Timing and preferred transactions

This subclause is applicable to devices in which 10PASS-TS and/or 2BASE-TL are the only G.994.1-initiated PHYs implemented and enabled. Start-up procedures for devices which include additional G.994.1-initiated modes of operation are outside the scope of this standard.

NOTE—Handshake operations specified in this subclause occur autonomously in the PHY, without intervention of the STA. They may however be triggered by an STA using the management interface.

If the PMA/PMD link control bit is set to 1 in the -O device (Table 45–10a), or discovery register operations are initiated (Table 45–59d), or link partner aggregation register operations are initiated (Table 45–59g), the -O device initiates G.994.1 startup procedures by transmitting C-TONES.

If the PMA/PMD link control bit is set to 1 in the -R device (Table 45–10a), the -R device initiates G.994.1 startup procedures by transmitting R-TONES-REQ.

At the conclusion of G.994.1 startup, the -R device shall begin G.994.1 transactions by transmitting an MR message. The -O device responds by sending C-TONES if the Ignore incoming handshake register bit (see 45.2.1.11) is set to 0_b.

If the G.994.1 session was initiated by the PMA/PMD link control bit (signifying that the link is to be brought up) in either the -O or -R device, then the -O device shall respond with an MS message specifying the configured mode of operation. However, if the PMA/PMD type selection bits in the -O device are set to the value 0011 or 0100, and a capabilities exchange has not previously taken place, the -O device shall instead respond with an REQ-CLR so that a capabilities exchange is performed. Following the final message of the capabilities exchange (i.e., an ACK(1)), the -R device once again sends an MR message. The -O device shall respond with an MS message specifying the configured mode of operation.

If the G.994.1 session was initiated in response to discovery register operations (Table 45–59d), or link partner aggregation register operations (Table 45–59g), then the -O device shall respond with an REQ-CLR message (MR received before) or with a CL message (CLR received before). This is then followed by one or two capability exchanges as described in the previous two subclauses. Following the final message of the final capabilities exchange (i.e., an ACK(1)), the CPE device once again sends an MR message. If neither the PMA/PMD control bit nor the discovery or link partner aggregation register operations are activated within the next 0.5 seconds, the -O shall transmit an MS message with the SPar(1) silent bit set.

NOTE—It is understood that the entire activation sequence consisting of PAF Discovery, PAF and line activation is time-consuming, therefore 2BASE-TL and 10PASS-TS devices are encouraged to exchange only relevant information in G.994.1 sessions during various stages of initialization.

61.5 Link segment characteristics

As stated in 61.1, the channel characteristics of voice grade copper are very diverse. Some typical channels are defined as part of the Performance Guidelines contained in Annex 62B (for 10PASS-TS) and Annex 63B (for 2BASE-TL). These annexes also define the reference performance levels for each PHY in these conditions. Behaviour in other voicegrade installations may be interpolated or extrapolated from that set of references.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 419 of 717

61.6 MDI specification

The MDI interface for 10PASS-TS and the Service Splitter and Electrical Characteristics for 10PASS-TS are defined in 62.3.5.

The Electrical Characteristics of the MDI interface for 2BASE-TL are defined in 63.3.2.

The local regulations may dictate interface characteristics in addition to or in place of some or all of these requirements.

61.7 System considerations

Both EFM Copper port types are defined for full duplex operation only, although certain MACs may still require to be configured for half duplex operation in order to respond to the carrier Sense signal, as required by the specification of MAC-PHY Rate Matching. The requirements of 31B.1 restrict the transmission of PAUSE frames to DTEs configured to the full duplex mode of operation. If PAUSE frames are used on an EFM Copper link, consideration should be given to the link latency, and the fact that the MAC-PHY Rate Matching mechanism can interfere with the expected operation of the PAUSE frame mechanism.

NOTE—It is recognized that an EFM Copper system may have to comply with additional requirements and/or restrictions outside the scope of this standard (see 61.6 and 61.8 for examples) in order to be allowed to be connected to a public infrastructure in a certain geographic area or regulatory environment. These additional requirements and/or restrictions may prohibit operation under certain profiles, or degrade the performance of the system when working under certain profiles.This may limit the system's compliance with this standard, as compliant systems support all profiles (see Annex 62A for 10PASS-TS and Annex 63A for 2BASE-TL) and meet all performance guidelines (see Annex 62B for 10PASS-TS and Annex 63B for 2BASE-TL).

A compliant CPE-side system cannot distinguish a CO-side system designed to operate under a limited set of profiles from a fully compliant CO-side system, as the selection of profiles is under control of the CO-side. A CPE-side system designed to operate under a limited set of profiles cannot be guaranteed to correctly interoperate with compliant CO-side systems.

It is recommended that vendors of systems that support a limited set of profiles provide PICS forms to indicate which profiles are supported, in order to allow users to assess the impact on interoperability.

61.8 Environmental specifications

The requirements of 14.7 should be considered as baseline Environmental Specifications for types 10PASS-TS and type 2BASE-TL. Since equipment specified in this Clause will typically be deployed into public network environments, the specific requirements of the network operator or the local authority having jurisdiction shall prevail in all cases, and shall be considered in the development of such equipment. Such requirements may be statutory and may include product safety, electromagnetic compatibility and protection of the public network against harms from attached equipment.

61.9 PHY labeling

It is recommended that PHY equipment (and supporting documentation) be labeled in a manner visible to the user with at least the following parameters.

a) PMA/PMD (sub-)type. A type (e.g., 10PASS-TS) can be specified if both -O and -R subtypes are supported. A subtype should be specified (e.g. 10PASS-TS-R) if only a single subtype is supported.
b) PAF capability if supported. The following information should be provided: number of MII/PCS ports provided; maximum number of PMEs per MII/PCS; total number of PMEs. For example:
    1) x8 or 1x8:8 for a single MII port with 8 PMEs
    2) 2x2:4 for a device with 2 MII ports and 4 PMEs, which can be aggregated up to 2 PMEs per port
    3) 4x4:4 for a device with 4 MII ports and 4 PMEs, which can be aggregated up to 4 PMEs per port
c) Homologation information
d) Applicable safety warnings

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 420 of 717

61.10 Protocol Implementation Conformance Statement (PICS) proforma for Clause 61, Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications type 10PASS-TS, 2BASE-TL[16]

61.10.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 61, Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications type 10PASS-TS, 2BASE-TL, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

61.10.2 Identification

61.10.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

61.10.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Physical Coding Sublayer (PCS) and common specifications, type 10PASS-TS and 2BASE-TL.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[16]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 421 of 717

61.10.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
RM	MAC-PHY Rate Matching	61.2.1	CRS deference mechanism supported.	M	Yes [ ]
TC	64/65-octet Encapsulation	61.3	The Ethernet-specific TPS-TC, between $\alpha(\beta)$-interface and γ-interface is implemented.	M	Yes [ ]
*PAF	PME Aggregation	61.2.2	Up to 32 PMA/PMD instances can be aggregated into a single MAC.	O	Yes [ ] No [ ]
HS	Support for G.994.1 handshake	61.4	PHY uses G.994.1 handshake to identify remote transceiver and exchange capabilities.	M	Yes [ ]
*2BO	2BASE-TL-O subtype	61, 63	The 2BASE-TL CO subtype is implemented.	O.1	Yes [ ] No [ ]
*2BR	2BASE-TL-R subtype	61, 63	The 2BASE-TL CPE subtype is implemented.	O.1	Yes [ ] No [ ]
*10PO	10PASS-TS-O subtype	61, 62	The 10PASS-TS CO subtype is implemented.	O.1	Yes [ ] No [ ]
*10PR	10PASS-TS-R subtype	61, 62	The 10PASS-TS CPE subtype is implemented.	O.1	Yes [ ] No [ ]

61.10.4 PICS proforma tables for the Physical Coding Sublayer (PCS), Transmission Convergence (TC) sublayer, and common specifications type 10PASS-TS, 2BASE-TL

61.10.4.1 MAC-PHY Rate Matching

Item	Feature	Subclause	Value/Comment	Status	Support
RM-1	MAC-PHY Rate Matching functions	61.2.1.1	The PHY uses CRS to match the MAC's faster rate of data transmission to the PHY's slower rate.	M	Yes [ ]
RM-2	MAC-PHY Rate Matching functions	61.2.1.1	Upon receipt of a MAC frame from the MII, the PHY discards the Preamble and SFD fields, and transmits the resulting data frame across the physical link.	M	Yes [ ]
RM-3	MAC-PHY Rate Matching functions	61.2.1.1	The PHY prepends the Preamble and the SFD fields to a received frame before sending it to the MAC.	M	Yes [ ]
RM-4	MAC-PHY Rate Matching functions	61.2.1.1	The PHY supports a mode of operation where it does not send data to the MAC while the MAC is transmitting.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 422 of 717

61.10.4.2 64/65-octet Encapsulation

Item	Feature	Subclause	Value/Comment	Status	Support
TC-1	The γ-interface	61.3.1	The PAF asserts Tx_Avbl when it has a whole data fragment available for transmission, and de-assert Tx_Avbl when there are no data fragments to transmit.	M	Yes [ ]
TC-2	TC functions	61.3.3	The TC provides full transparent transfer of data frames between γ_O-interface and γ_R-interface.	M	Yes [ ]
TC-3	TC functions	61.3.3	The TC provides fragment integrity and fragment error monitoring capability.	M	Yes [ ]
TC-4	TC functions	61.3.3	The bit rate of data transport in the upstream and downstream directions are set independently of each other to any eligible value up to the maximum rate determined by the PMD.	M	Yes [ ]
TC-5	TC Encapsulation and Coding	61.3.3.1	When a frame arrives from the γ-interface while an End of Frame codeword is being transmitted, a Start of Frame octet is inserted prior to the transmission of data octets belonging to the next frame.	M	Yes [ ]
TC-6	Sync detection	61.3.3.5	The synchronization is acquired from the incoming data stream.	M	Yes [ ]
TC-7	Sync detection	61.3.3.5.2	The receiver implements the sync detect state machine shown in Figure 61–17.	M	Yes [ ]
TC-8	Receive control	61.3.3.6	If TC_synchronized = false then signal RX_Enbl is de-asserted.	M	Yes [ ]
TC-9	Receive control	61.3.3.6	If a TC-CRC error is detected, the receive controller asserts signal RX_Err during at least one octet of the fragment as it is passed up across the γ-interface.	M	Yes [ ]
TC-10	Receive control	61.3.3.6	If the fragment contains data from a block in which the PMA detected errors but did not correct them, the receive controller asserts signal RX_Err during at least one octet of a fragment as it is passed up across the γ-interface.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 423 of 717

61.10.4.3 PME Aggregation[17]

Item	Feature	Subclause	Value/Comment	Status	Support
PAF-1	PME Aggregation Receive function	61.2.2.4	When the link state is changed to UP, the expected sequence number is unknown and no frame sequence errors are recorded.	*PAF:M	Yes [ ]
PAF-2	PME Aggregation Transmit Function Restrictions	61.2.2.6	The differential latency between any two PMEs in an aggregated group is no more than 15 000 bit times.	*PAF:M	Yes [ ]
PAF-3	PME Aggregation Transmit Function Restrictions	61.2.2.6	Fragments are not less than 64 octets.	*PAF:M	Yes [ ]
PAF-4	PME Aggregation Transmit Function Restrictions	61.2.2.6	Fragments are not more than 512 octets.	*PAF:M	Yes [ ]
PAF-5	PME Aggregation Transmit Function Restrictions	61.2.2.6	The highest ratio of speeds between any two aggregated links is 4.	*PAF:M	Yes [ ]
PAF-6	PME Aggregation Transmit Function Restrictions	61.2.2.6	The fragment size is a multiple of 4 octets except for the last fragment of a data frame.	*PAF:M	Yes [ ]
PAF-7	Error-detecting Rules	61.2.2.7	For each PMA, the per-PMA buffering mechanism discards the fragment if any of the listed conditions occur, and asserts the PAF error flags as appropriate. If the packet assembly function was mid-frame, the first part of the frame is transferred across the MII, then the RX_ER signal is asserted on the MII, the frame transfer is aborted and PMA buffers are flushed until the next Start of Packet is received.	*PAF:M	Yes [ ]
PAF-8	Error-detecting Rules	61.2.2.7	If a fragment is received with the StartOfPacket bit asserted while the packet assembly function was mid-frame, the first part of the frame is transferred across the MII, then the RX_ER signal is asserted on the MII, the frame transfer is aborted and PMA buffers are flushed until the next Start of Packet is received.	*PAF:M	Yes [ ]
PAF-9	PME aggregation register functions	61.2.2.8.3	The remote_discovery_register and Aggregation_link_state_register are implemented.	*PAF:M	Yes [ ]
PAF-10	PME aggregation register functions	61.2.2.8.3	The PME_Available_register is read-only.	*PAF: *2BO:M *10PO:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 424 of 717

PAF-11	PME aggregation register functions	61.2.2.8.3	The PME_Available_register is writable.	*PAF: *2BR:O *10PR:O	Yes [ ] No [ ]
PAF-12	PME aggregation register functions	61.2.2.8.3	For a device that does not support aggregation of multiple PMEs, a single bit of the PME_Available_register is set and all other bits clear.	*PAF:M	Yes [ ]
PAF-13	PME aggregation register functions	61.2.2.8.3	The PME_Available_register is read-only.	*PAF: *2BO:M *10PO:M	Yes [ ]
PAF-14	PME aggregation register functions	61.2.2.8.3	The PME_Available_register is writable.	*PAF: *2BR:O *10PR:O	Yes [ ] No [ ]
PAF-15	PME aggregation register functions	61.2.2.8.3	For CPE-subtype devices, PMD links are not enabled until the PME_Available_register has been set to limit the connectivity such that each PME maps to one, and only one MII.	*PAF:M	Yes [ ]
PAF-16	PME aggregation register functions	61.2.2.8.3	If the remote_discovery_register is clear then the PME_Aggregate_register is cleared.	*PAF:M	Yes [ ]
PAF-17	PME aggregation register functions	61.2.2.8.3	The remote_discovery_register is implemented for CPE-sub-type devices.	*PAF: *2BR:M *10PR:M	Yes [ ]
PAF-18	PME aggregation register functions	61.2.2.8.3	The remote_discovery_register supports atomic write operations and reads from remote devices via the remote access signals passed across the γ-interface from the PMA.	*PAF:M	Yes [ ]
PAF-19	PME aggregation register functions	61.2.2.8.3	If multiple write_remote_discovery_reg signals are asserted they are acted upon serially.	*PAF:M	Yes [ ]
PAF-20	PME aggregation register functions	61.2.2.8.3	If the logical AND of the Aggregation_link_state_register and the PME_Aggregate_register is clear then a time-out counter is started. If this condition continues for 30 seconds then the remote_discovery_register is cleared.	*PAF:M	Yes [ ]
PAF-21	Remote access of PME Aggregation registers	61.4.7	The “TDIM Bonding” SPar(1) bit is deasserted.	*PAF:M	Yes [ ]

[17]All items listed in this section are only applicable if the optional PME Aggregation Function is supported.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 425 of 717

PAF-22	Remote_discovery_register	61.4.7.1	2BASE-TL-R and 10PASS-TS-R PHYs assert the PME Aggregation Discovery SPar bit in all G.994.1 CLR messages, if and only if its local PAF_available bit is set.	*PAF:M	Yes [ ]
PAF-23	Remote_discovery_register	61.4.7.1	CPE-subtypes place the contents of the remote_discovery_register in the corresponding NPar bits in the outgoing CLR message, with the “Clear if Same” NPar set to zero.	*PAF:M	Yes [ ]
PAF-24	Remote_discovery_register	61.4.7.1	In response to a “Get” command, the CO-subtype performs a G.994.1 capabilities exchange with the CPE-subtype. The contents of the NPar remote_discovery_register bits in the CLR message received from the CPE-subtype are reported as the result.	*PAF:M	Yes [ ]
PAF-25	Remote_discovery_register	61.4.7.1	The CL message sent by the CO-subtype in response to the CLR has the PME Aggregation Discovery SPar bit set to zero.	*PAF:M	Yes [ ]
PAF-26	Remote_discovery_register	61.4.7.1	In response to a “Set if Clear” command, the CO-subtype performs two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar remote_discovery_register bits in the first CLR message received from the CPE-subtype are ignored.	*PAF:M	Yes [ ]
PAF-27	Remote_discovery_register	61.4.7.1	The CL message sent by the CO-subtype in response to the first CLR has the PME Aggregation Discovery SPar bit set to one, the Clear if Same NPar bit set to zero, and the NPar remote_discovery_register bits set to the CO-subtype PME Aggregation Discovery Code register.	*PAF:M	Yes [ ]
PAF-28	Remote_discovery_register	61.4.7.1	In a set-if-clear exchange, the CPE-subtype sets the remote_discovery register to the value of the Remote Discovery register NPar(3) if it is currently clear.	*PAF:M	Yes [ ]
PAF-29	Remote_discovery_register	61.4.7.1	The contents of the NPar remote_discovery_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange are reported as the result.	*PAF:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 426 of 717

PAF-30	Remote_discovery_register	61.4.7.1	The CL message sent by the CO-subtype in response to the second CLR has the PME Aggregation Discovery SPar bit set to zero.	*PAF:M	Yes [ ]
PAF-31	Remote_discovery_register	61.4.7.1	In response to a “Clear if Same” command, the CO-subtype performs two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar remote_discovery_register bits in the first CLR message received from the CPE-subtype are ignored.	*PAF:M	Yes [ ]
PAF-32	Remote_discovery_register	61.4.7.1	The CL message sent by the CO-subtype in response to the first CLR has the PME Aggregation Discovery SPar bit set to one, the Clear if Same NPar bit set to one, and the NPar remote_discovery_register bits set to the CO-subtype PME Aggregation Discovery Code register.	*PAF:M	Yes [ ]
PAF-33	Remote_discovery_register	61.4.7.1	In a clear-if-same exchange, the CPE-subtype clears the remote_discovery register if it is currently equal to the value of the Remote Discovery register NPar(3).	*PAF:M	Yes [ ]
PAF-34	Remote_discovery_register	61.4.7.1	The contents of the NPar remote_discovery_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange are reported as the result.	*PAF:M	Yes [ ]
PAF-35	Remote_discovery_register	61.4.7.1	The CL message sent by the CO-subtype in response to the second CLR has the PME Aggregation Discovery SPar bit set to zero.	*PAF:M	Yes [ ]
PAF-36	PME_Aggregate_register	61.4.7.2	2BASE-TL-R and 10PASS-TS-R PHYs assert the PME Aggregation SPar bit in all G.994.1 CLR messages, if and only if their local PAF_available bit is set.	*PAF:M	Yes [ ]
PAF-37	PME_Aggregate_register	61.4.7.2	CPE-subtypes place the contents of the PME_Aggregate_register in the corresponding NPar bits in the outgoing CLR message.	*PAF:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 427 of 717

PAF-38	PME_Aggregate_register	61.4.7.2	In response to a “get” command, the CO-subtype performs a G.994.1 capabilities exchange with the CPE-subtype. The contents of the NPar PME_Aggregate_register bits in the CLR message received from the CPE-subtype are reported as the result.	*PAF:M	Yes [ ]
PAF-39	PME_Aggregate_register	61.4.7.2	The CL message sent by the CO-subtype in response to the CLR has the PME Aggregation SPar bit set to zero.	*PAF:M	Yes [ ]
PAF-40	PME_Aggregate_register	61.4.7.2	In response to a “set” command, the CO-subtype performs two back-to-back G.994.1 capabilities exchanges with the CPE-subtype. The contents of the NPar PME_Aggregate_register bits in the first CLR message received from the CPE-subtype are ignored.	*PAF:M	Yes [ ]
PAF-41	PME_Aggregate_register	61.4.7.2	The CL message sent by the CO-subtype in response to the first CLR has the PME Aggregation SPar bit set to one and the NPar PME_Aggregate_register bit zero.	*PAF:M	Yes [ ]
PAF-42	PME_Aggregate_register	61.4.7.2	The contents of the NPar PME_Aggregate_register bits in the CLR message received from the CPE-subtype during the second capabilities exchange are reported as the result.	*PAF:M	Yes [ ]
PAF-43	PME_Aggregate_register	61.4.7.2	The CL message sent by the CO-subtype in response to the second CLR has the PME Aggregation SPar bit set to zero.	*PAF:M	Yes [ ]
PAF-44	Timing and preferred transactions	61.4.7.3	At the conclusion of G.994.1 startup, the -R device begins G.994.1 transactions by transmitting an MR message.	*PAF:M	Yes [ ]
PAF-45	Timing and preferred transactions	61.4.7.3	If the G.994.1 session was initiated by the PMA/PMD link control bit in either the -O or -R device, then the -O device responds with an MS message specifying the configured mode of operation.	*PAF:M	Yes [ ]
PAF-46	Timing and preferred transactions	61.4.7.3	If the PMA/PMD type selection bits in the -O device are set to the value 0011 or 0100, and a capabilities exchange has not previously taken place, the -O device instead responds with an REQ-CLR so that a capabilities is performed.	*PAF:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 428 of 717

PAF-47	Timing and preferred transactions	61.4.7.3	The -O device responds with an MS message specifying the configured mode of operation.	*PAF:M	Yes [ ]
PAF-48	Timing and preferred transactions	61.4.7.3	If the G.994.1 session was initiated in response to discovery register operations, or link partner aggregation register operations, then the -O device responds with an REQ-CLR message or with a CL message.	*PAF:M	Yes [ ]
PAF-49	Timing and preferred transactions	61.4.7.3	If neither the PMA/PMD control bit nor the discovery or link partner aggregation register operations are activated within 0.5 seconds after an MR message, the -O transmits an MS message with the SPar silent bit set.	*PAF:M	Yes [ ]

61.10.4.4 Handshaking

Item	Feature	Subclause	Value/Comment	Status	Support
HS-1	Revision number: reference G.994.1 section 9.3.2	61.4.1	G.994.1 Revision Number 3 or higher is implemented.	M	Yes [ ]
HS-2	Summary of handshaking and PHY control specification	61.1.4.3	Devices implementing both 2BASE-TL and 10PASS-TS port types use G.994.1 to determine a common mode of operation.	O	Yes [ ] No [ ]
HS-3	4.3125 kHz signalling family: reference G.994.1 section 6.1.1	61.4.3	The mandatory carrier set listed in Table 61–13 is transmitted.	10PR:M 10PO:M	Yes [ ]
HS-4	4 kHz signalling family: reference G.994.1 section 6.1.2	61.4.3	The mandatory carrier set listed in Table 61–14 is transmitted.	2BR:M 2BO:M	Yes [ ]
HS-5	prohibited carrier sets	61.4.3	Carriers not listed in Reference Table 1 or Reference Table 3 are not transmitted.	M	Yes [ ]
HS-6	optional carrier sets	61.4.3	One or more carriers listed in Reference Table 1 or Reference Table 3 are transmitted in addition to a mandatory carrier set listed in Table 61–13 or Table 61–14.	O	Yes [ ] No [ ]
HS-7	Standard information field coding	61.4.4	The Standard information field (S) codepoints specified in Annex 61B are used in the transactions specified in 61.4.4.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 429 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 430 of 717

62. Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS

62.1 Overview

62.1.1 Scope

This clause specifies the 10PASS-TS Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD) for voice grade twisted-pair wiring. In order to form a complete 10PASS-TS PHY, the 10PASS-TS PMA and PMD are integrated with the TC and PCS of Clause 61. Parts of register 3.0, parts of register 3.4, and registers 3.60 through 3.73 specified in Clause 45 may be used to control the PCS of Clause 61. Parts of register 6.0 and registers 6.16 through 6.23 specified in Clause 45 may be used to control the TC sublayer of Clause 61. Registers 1.16 through 1.71 may be used to control the 10PASS-TS PMA and PMD.

62.1.2 Objectives

The following are the objectives for the 10PASS-TS PMA and PMD:

a) To provide 10Mb/s encapsulated packet data rate at the $\alpha(\beta)$-interface.
b) To provide full duplex operation.
c) To provide for operating over non-loaded voice grade twisted pair cable at distances up to 750 m.
d) To provide a communication channel with a mean bit error ratio, at the $\alpha(\beta)$-interface, of less than one part in 10^7 with 6 dB noise margin.

62.1.3 Relation of 10PASS-TS to other standards

The specifications of 10PASS-TS PMA and PMD are based on the VDSL transceiver specified in ANSI T1.424.

62.1.4 Summary of Physical Medium Attachment (PMA) specification

This layer is defined by the $\alpha(\beta)$-interface and the I-interface.

62.1.4.1 $\alpha(\beta)$-interface

A complete definition of the $\alpha(\beta)$-interface is contained in 61.3.2.

62.1.4.2 The I-interface

The I_O and I_R reference points define interfaces between the PMA and PMD in the 10PASS-TS-O and 10PASS-TS-R, respectively. Both interfaces are functional, application independent and identical. Both interfaces are defined by the following signal flows:

a) Data flow
b) Synchronization flow

62.1.4.2.1 The I Data Flow

The data flow consists of two octet-oriented streams, both with the PMA frame format, with the bit rates defined by the PMD transmission profile:

a) Transmitted data (Tx)
b) Received data (Rx).

If data streams are implemented serially, the MSB of each octet is sent first.

Each stream bit rate value is set during PMD configuration.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 431 of 717

62.1.4.2.2 The I Synchronization Flow

The synchronization flow consists of the transmitted and received octet synchronization signals (Clko_t, Clko_r). Optional transmit and receive bit-synchronization signals (Clkp_t, Clkp_r) are defined too.

Synchronization signals are asserted by the PMD and directed towards the PMA.

The synchronization flow signals are described in Table 62–1.

Table 62–1—I-interface signals

Signal(s)	Description	Direction	Notes
Data signals			
Tx	Transmitted data stream	PMA → PMD	Transmission frame format.
Rx	Received data stream	PMA ← PMD	
Synchronization signals			
Clko_t	Transmitted octet timing	PMA ← PMD	
Clko_r	Received octet timing	PMA ← PMD	
Clkp_t	Transmitted bit timing	PMA ← PMD	Optional
Clkp_r	Received bit timing	PMA ← PMD	Optional

62.2 PMA functional specifications

For the purpose of transmission over a serial implementation of the α(β)-interface or the I-interface, bit b_8 as defined in Figure 61–16 is considered MSB and shall therefore be transmitted first. However, for the purpose of all serial processing (e.g.: scrambling, CRC calculation) bit b_8 is considered LSB and shall therefore be the first bit processed. Thus, the outside world MSB is considered as the 10PASS-TS LSB.

62.2.1 PMA functional diagram

Figure 62–1 shows a diagram of the PMA sublayer.

62.2.2 PMA functional specifications

The 10PASS-TS PMA is specified by incorporating the VDSL standard, American National Standard T1.424, by reference, with the modifications noted below. This standard provides support for voice-grade twisted pair. For improved legibility in this clause, American National Standard T1.424, will henceforth be referred to as MCM-VDSL.

62.2.3 General exceptions

The 10PASS-TS PMA is precisely the PMS-TC specified in MCM-VDSL, with the following general modifications:

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 432 of 717

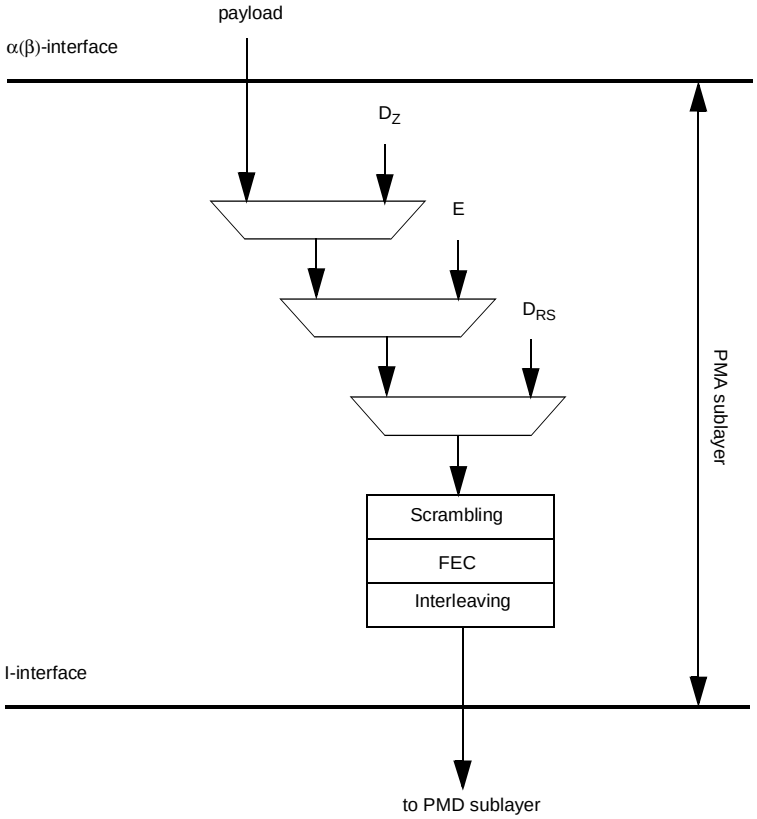


Figure 62–1—Diagram of PMA sublayer

a) There are minor terminology differences between this standard and MCM-VDSL that do not cause ambiguity. The terminology used in 10PASS-TS was chosen to be consistent with other IEEE 802® standards, rather than with MCM-VDSL. Terminology is both defined and consistent within each standard. Special note should be made of the interpretations shown in Table 62–2.
b) The 10PASS-TS PMA does not support the “fast path”.

Table 62–2—Interpretation of general MCM-VDSL terms and concepts

MCM-VDSL term or concept	Interpretation for 10PASS-TS
PMS-TC	PMA
VTU-O, LT	10PASS-TS-O
VTU-R, NT	10PASS-TS-R
Transmission medium dependent interface	MDI
U1-interface (splitter present)	
U2-interface (splitter absent)	

62.2.4 Specific requirements and exceptions

The 10PASS-TS PMA shall comply to the requirements of MCM-VDSL Section 9.3 with the exceptions listed below. Where there is conflict between specifications in MCM-VDSL and those in this standard, those of this standard shall prevail.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 433 of 717

62.2.4.1 Replacement of 9.3.1, "PMS-TC functional diagram"

Replace 9.3.1 of MCM-VDSL by the PMA functional diagram in 62.2.1.

62.2.4.2 Changes to 9.3.3, "Forward error correction"

Referenced as is, with the exception of required Reed-Solomon encoder and interleaver settings.

The mandatory settings in MCM-VDSL (144,128) and (240,224) shall be supported. Other values are out of scope.

The following interleaver parameters shall be supported:

a) For (*N*,*K*)=(144,128) the following values for *M* and *I* shall be supported: *I*=36 and *M* between 2 and 52
b) For (*N*,*K*)=(240,224) the following values for *M* and *I* shall be supported: *I*=30 and *M* between 2 and 62

Other settings for *M* and *I* are out of scope.

62.2.4.3 Changes to 9.3.5, "Framing"

Referenced as is, with following exceptions:

a) the "fast" buffer is not supported
b) there shall be 1 VOC byte per packet; other values of V as defined in 9.3.5.5 are outside the scope of this standard
c) 9.3.5.5.4 (NTR) is not applicable
d) in Table 9-4 (9.3.5.5.3), following changes apply
    1) bits B2, B3 of Byte #2 are reserved
    2) bits B1, B2, B3, B4 of Byte #3 shall be set to 0

Additional text: the signal PMA_receive_synchronized, defined in 61.3.2.2, shall be asserted when 10PASS-TS is in the state "STEADY_STATE_TRANSMISSION" (see Figure 62–4), and deasserted when 10PASS-TS is in any other state.

62.3 PMD functional specifications

62.3.1 PMD Overview

The 10PASS-TS PMD functional model is presented in Figure 62–2. In the transmit direction, the PMD layer receives frames from the PMA layer. It sends a DMT modulated signal towards the physical medium over the MDI.

The bytes within the frame are encoded to a set of QAM constellation points that are used to modulate the carriers of the DMT symbol. The time-domain symbol is cyclically extended and then windowed to reduce sidelobe energy.

In the receive direction, a modulated signal is received from the transmission medium over the MDI. The PMD layer outputs a data frame to the PMA layer. The receiver is responsible for equalization and demodulation of the signal.

62.3.2 PMD functional specifications

The 10PASS-TS PMD (and MDI) is specified by incorporating the MCM-VDSL standard, ANSI T1.424, by reference, with the modifications noted below. This standard provides support for voice-grade twisted pair.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 434 of 717

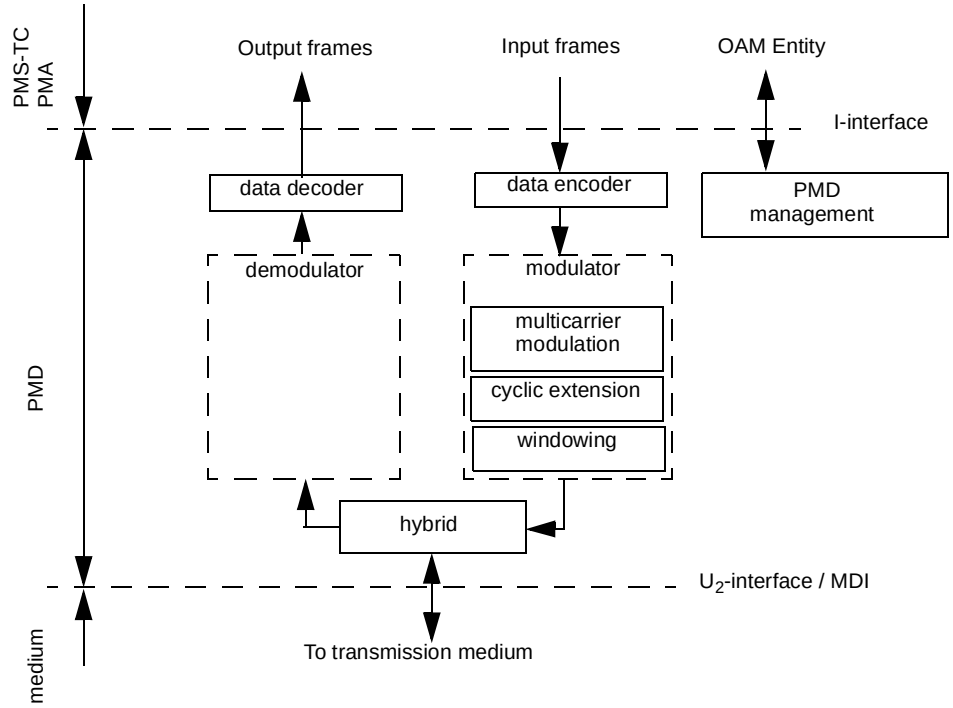


Figure 62–2—Functional diagram of PMD sublayer

62.3.3 General exceptions

The 10PASS-TS PMD is precisely the PMD specified as MCM-VDSL, with the following general modifications:

There are minor terminology differences between this standard and MCM-VDSL that do not cause ambiguity. The terminology used in 10PASS-TS was chosen to be consistent with other IEEE 802 standards, rather than with MCM-VDSL. Terminology is both defined and consistent within each standard. Special note should be made of the interpretations shown in Table 62–3.

Table 62–3—Interpretation of general MCM-VDSL terms and concepts

MCM-VDSL term or concept	Interpretation for 10PASS-TS
PMS-TC	PMA
VTU-O, LT	10PASS-TS-O
VTU-R, NT	10PASS-TS-R
Transmission medium dependent interface	MDI
U1-interface (splitter present)	
U2-interface (splitter absent)	

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 435 of 717

62.3.4 Specific requirements and exceptions

The 10PASS-TS PMD (including MDI) shall comply to the requirements of MCM-VDSL Section 8 (Physical medium dependent (PMD) sublayer), Section 10 (Operations and maintenance), Section 11 (Link activation and deactivation) and Section 18 (Normative Annex 4 - Handshake procedure for VDSL) with the exceptions listed below. Section 12 (Test procedures and requirements), Section 13 (Physical conditions), Section 14 (Environmental conditions), Section 15 (Normative Annex 1: International amateur bands), Section 16 (Informative Annex 2: VDSL PSD templates figures), Section 17 (Informative Annex 3: Utopia implementation of the ATM-TC interface), Section 19 (Informative Annex 5: FMT implementation), Section 20 (Informative Annex 6: 8.625kHz tone spacing), Section 21 (Normative Annex 7: Electrical characteristics of service splitter at remote subscriber end), Section 22 (Informative Annex 8: Electrical characteristics of service splitter at network end), and Section 23 (Informative Annex 9: Alien crosstalk descriptions), are outside the scope of this standard. Where there is conflict between specifications in MCM-VDSL and those in this standard, those of this standard shall prevail. Optional specifications in MCM-VDSL are out of scope unless explicitly referenced in this document as mandatory. If out-of-scope optional features are implemented, the mode of operation of the PHY cannot be labeled "10PASS-TS" when these features are activated.

NOTE—If optional features are implemented, their use is negotiated during initialization.

62.3.4.1 Replacement of 8.2.1, "Multi-carrier Modulation"

10PASS-TS transceivers shall use Frequency Division Duplexing (FDD) to separate upstream and downstream transmission. 10PASS-TS transceivers shall support modulation of N_{SC} = 4,096 subcarriers (n = 4). Disjoint subsets of the N_{SC} sub-carriers shall be defined for use in the downstream and upstream directions. These subsets are determined by the choice of frequency plan. The exact subsets of sub-carriers used to modulate data in each direction shall be determined during initialization and shall be based on management system settings and the signal-to-noise ratios (SNRs) of the sub-channels. In many cases the number of sub-carriers used in a direction will be less than the maximum number allowed by the partitioning.

Frequency plans are defined in Annex 62A. In standard frequency plans, frequency bands are allocated as shown in Figure 62–3. The values of the splitting frequencies are given in Annex 62A. Adherence to a particular frequency plan may be mandatory under local regulations when 10PASS-TS is deployed in public networks. Other frequency plans, for use in private networks, can be supported by means of Clause 45 register settings (see Annex 62C for examples).

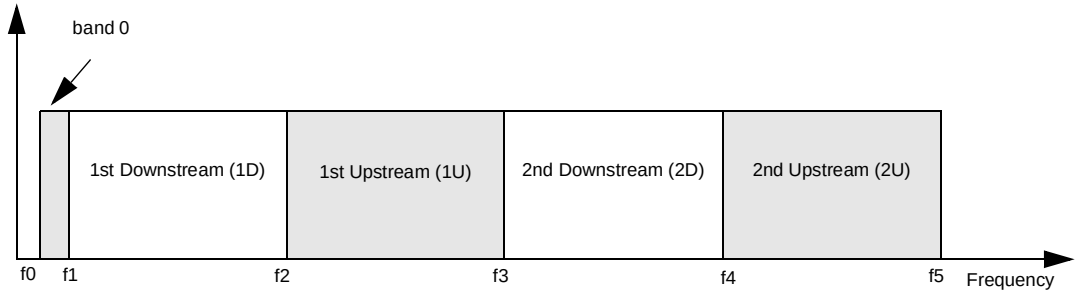


Figure 62–3—10PASS-TS band allocation

8.2.1.1 (Tone Spacing) is referenced as is.

8.2.1.2 (Data Sub Carriers) is referenced as is.

8.2.1.3 (IDFT modulation) is referenced as is.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 436 of 717

62.3.4.2 Changes to 8.2.2, "Cyclic extension"

8.2.2 of MCM-VDSL is further restricted by the following normative text:

The cyclic extension length is specified by the value of parameter *m*. In 10PASS-TS, support for the values $m = 10$, $m = 20$, and $m = 40$ is mandatory. The value $m=20$ is the default setting. Support for other values is out of scope.

62.3.4.3 Changes to 8.2.3, "Synchronization"

8.2.3.1 of MCM-VDSL is further clarified by the following text:

Support for pilot tones is mandatory. 10PASS-TS-O PHYs shall support the transmission of a pilot tone on any downstream tone.

8.2.3.2 (Loop Timing) is referenced as is.

8.2.3.3 (Timing Advance) is referenced as is.

8.2.3.4 of MCM-VDSL is replaced with the following:

The use of synchronous mode as defined in MCM-VDSL 8.2.3.4 may improve operation in certain binder environments and is a system implementation item which is outside the scope of this standard.

62.3.4.4 Replacement of 8.2.4, "Power back-off in the upstream direction"

To mitigate the effects of FEXT from short lines into long lines in distributed cable topologies, upstream power back-off shall be applied. Transceivers shall be capable of performing frequency-dependent power back-off.

It shall be possible to temporarily disable UPBO for performance testing purposes (as required by Annex 62B). In normal operation, only one UPBO mode shall be supported as described below:

a) It shall be possible for the network management system to set the limiting transmit PSD template PSD_0 for the 10PASS-TS-R to one of the standard transmit PSD templates as defined in the applicable section of 62A.3.3.
b) The 10PASS-TS-R shall perform UPBO autonomously, i.e., without sending any significant information to the 10PASS-TS-O until the UPBO is applied.
c) After UPBO has been applied as described in b), the 10PASS-TS-O shall be capable of adjusting the transmit PSD selected by the 10PASS-TS-R; the adjusted transmit PSD shall be subject to the limitations given in the applicable section of 62A.3.3.

To enable the 10PASS-TS-R to initiate a connection with the 10PASS-TS-O, which will occur before UPBO has been applied, the 10PASS-TS-R shall be allowed to cause more degradation to other loops than expected when using the mode described below.

NOTE—Initiation refers to a request from the 10PASS-TS-R to start the initialization of the link. The particular method is in MCM-VDSL 11.2.

The 10PASS-TS-R shall explicitly estimate the electrical length of its line, kl_0, and use this value to calculate the transmit PSD template $TxPSD(kl_0,f)$. The 10PASS-TS-R shall then adapt its transmit signal PSD to conform to the template $TxPSD(kl_0,f)$ and the corresponding PSD mask which is defined in the applicable section of 62A.3.3.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 437 of 717

The transmit PSD template shall be calculated as:

$$TxPSD(kl_0,f) = \min (PSD\_REF(f) + LOSS(kl_0,f), PSD_0), \text{ in dBm/Hz} \quad (62–1)$$

where PSD_0 as defined in a) above, and:

$$LOSS = kl_0 \, \mathrm{sqrt}(f), \text{ in dB} \quad (62–2)$$

where the *LOSS* function is an approximation of the loop attenuation (insertion loss).

NOTE—The estimation of the electrical length should be sufficiently accurate to avoid spectrum management problems and additional performance loss.

PSD_REF will depend on the limiting transmit PSD template PSD_0 and on the noise model that is relevant for a given deployment scenario. The values of *PSD_REF* depend on the selected UPBO Reference PSD profile, as shown in Table 62A-3. The same bandwidth as for all regular transmit PSD masks defined in the applicable section of 62A.3.3 shall be used to check the conformance of *TxPSD* with power back-off. The general methodology for testing PSD conformance is defined in 6.1 of T1.417. Conformance with the PSD template shall be verified using a 100 kHz sliding window in the in-band frequency range below 1 MHz and a 1 MHz sliding window in the in-band frequency range above 1 MHz.

PSD_REF shall be input via the management interface (by means of the UPBO Reference PSD field in the 10P tone control parameter register, see 45.2.1.35) and shall be transmitted from the 10PASS-TS-O to the 10PASS-TS-R.

The 10PASS-TS-R shall estimate the insertion losses of the upstream bands based on the received downstream signals. From this, the shape of the *LOSS* function (or, equivalently, the electrical length) as defined above shall be derived. The 10PASS-TS-R shall then compute the transmit PSD by dividing the reference PSD in the upstream bands by the estimated *LOSS* function. Next, the 10PASS-TS-R shall take a tone-by-tone minimum of this computed PSD and the maximum allowed transmit PSD in the upstream direction. The result shall be used as the initial upstream transmit PSD. The PSD received by the 10PASS-TS-O should approximate the reference PSD. Upon receiving signals from the 10PASS-TS-R, the 10PASS-TS-O shall compare the actual received PSD to the reference PSD. If necessary, it shall instruct the 10PASS-TS-R to fine-tune its PSD.

The 10PASS-TS-O shall also have the capability to directly impose a maximum allowed transmit PSD at the 10PASS-TS-R. This maximum transmit PSD shall also be input via the management interface and shall be transmitted from 10PASS-TS-O to 10PASS-TS-R in the early stages of the initialization. The 10PASS-TS-O shall allow the operator to select one of these two methods. If the PBO is defined as a maximum transmit PSD at the 10PASS-TS-R, the 10PASS-TS-R shall adjust its transmit PSD such that it does not exceed the maximum allowed transmit PSD. The restrictions specified in the previous paragraph shall also apply in this case (i.e. the 10PASS-TS-O shall not impose a transmit PSD mask that violates the mask specified there).

62.3.4.5 Changes to 8.2.5, “Constellation encoder”

In 8.2.5 of MCM-VDSL, the constraints on B_{max_d} and B_{max_u} are replaced by the following constraints:

$$B_{max\_d} = 12 \quad (62–3)$$

$$B_{max\_u} = 12 \quad (62–4)$$

62.3.4.6 Changes to 8.2.8, “U-interface characteristics”

8.2.8 is replaced with the requirements specified in 62A.3.5.

All other subclauses in MCM-VDSL Clause 8 are referenced as is.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 438 of 717

62.3.4.7 Changes to section 10, “Operations and maintenance”

Referenced as is, with the addition of the mapping between VTU-R data registers and Clause 45 register access shown in Table 62–4.

Table 62–4—Mapping of VTU-R data registers to Clause 45

VTU-R data register (eoc)		Clause 45 register access 10PASS-TS-O		Clause 45 register access 10PASS-TS-R	
Register number	**Description[a]**	**register**	**Subclause**	**Clause 45 register**	**Subclause**
0_{16}	VTU-R vendor ID	not applicable			
1_{16}	VTU-R revision number	not applicable			
2_{16}	VTU-R serial number	not applicable			
3_{16}	Self-test results	PMA/PMD link status[b]	45.2.1.12.4	PMA/PMD link status[c]	45.2.1.12.4
4_{16}	Performance[d]	bytes 00_{16}–03_{16}: attainable DS rate	45.2.1.41	bytes 00_{16}–03_{16}: attainable DS rate	45.2.1.41
		bytes 04_{16}–05_{16}: FEC correctable errors	45.2.1.24	bytes 04_{16}–05_{16}: FEC correctable errors	45.2.1.22
		bytes 08_{16}–09_{16}: FEC uncorrectable errors	45.2.1.25	bytes 08_{16}–09_{16}: FEC uncorrectable errors	45.2.1.23
5_{16}	Vendor-discretionary	not applicable			
6_{16}	Loop attenuation	10P/2B line attenuation	45.2.1.19	10P/2B line attenuation	45.2.1.18
7_{16}	SNR margin	10P/2B RX SNR margin	45.2.1.17	10P/2B RX SNR margin	45.2.1.16
8_{16}	VTU-R configuration	not applicable			
9-F_{16}	For future use	not applicable			

[a]This is the description of the VTU-R data registers as given in MCM-VDSL.
[b]A non-zero value of the Self-test results register shall cause PMA/PMD link status to be cleared to 0.
[c]A non-zero value of the Self-test results register shall cause PMA/PMD link status to be cleared to 0.
[d]This field contains 16 bytes in total. The bytes that are not mapped to a Clause 45 register in this table, are reserved.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 439 of 717

62.3.4.8 Changes to 11.1, "VDSL Link State and Timing Diagram"

See Figure 62–4.

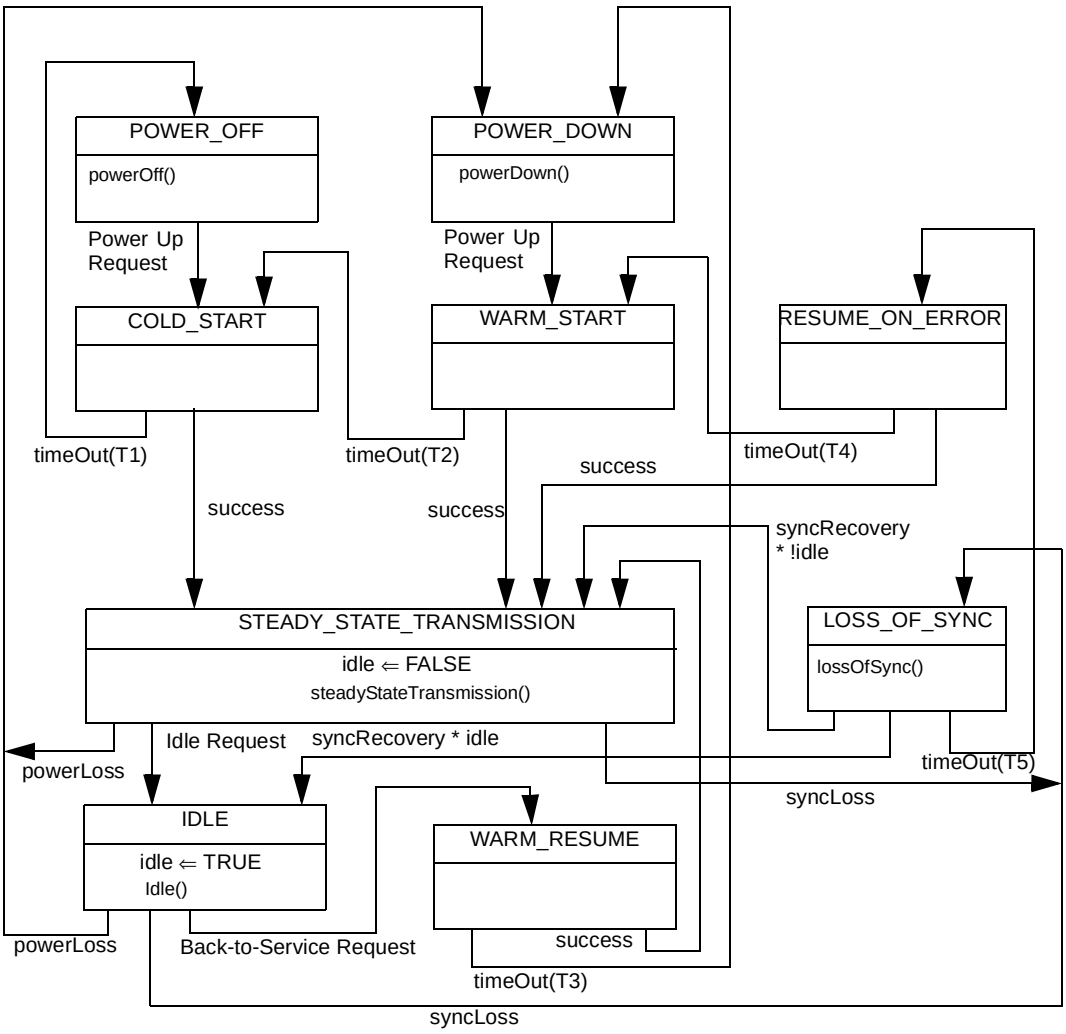


Figure 62–4—Link state and timing diagram

The function timeOut (time) returns FALSE upon entry of the associated state, and returns TRUE as soon as the interval specified by the argument "time" has expired. In addition, the state diagram uses following variables and constants.

T1
: Constant indicating the maximum cold-start activation time, equal to 10000 ms

T2
: Constant indicating the maximum warm-start activation time, equal to 5000 ms

T3
: Constant indicating the maximum warm-resume activation time, equal to 100 ms

T4
: Constant indicating the maximum resume-on-error activation time, equal to 300 ms

T5
: Constant indicating the maximum sync-loss recovery time, equal to 200 ms

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 440 of 717

idle Variable which indicates if the PMD has transitioned from STEADY_STATE_TRANSMISSION to IDLE. The idle variable becomes TRUE when the PMD enters the IDLE state, and becomes FALSE when the PMD enters the STEADY_STATE_TRANSMISSION mode.

success
Variable which is TRUE if and only if the procedures in the associated state were completed without error.

The following procedures are introduced to represent the actions associated with various states, as defined in MCM-VDSL.

powerOff()
See description of *Power-off* in MCM-VDSL section 11.1.1.1

steadyStateTransmission()
See description of *Steady-State Transmission* in MCM-VDSL section 11.1.1.1

lossOfSync()
See description of *Loss of Sync (Loss of Signal)* in MCM-VDSL section 11.1.1.1

powerDown()
See description of *Power Down* in MCM-VDSL section 11.1.1.1

idle()
See description of *Idle* in MCM-VDSL section 11.1.1.1

The remaining actions and transitions are documented in MCM-VDSL section 11.1, referenced as is.

62.3.4.9 Changes to section 18 (Annex 4), "Handshake procedure for VDSL"

62.3.4.9.1 Replacement of 18.1, "Introduction"

The 10PASS-TS handshake procedure is based on ITU-T Recommendation G.994.1 (G.hs). The carrier set used is specified in 61.3. During the handshake procedure, the following parameters shall be transmitted:

a) The size of IDFT/DFT;
b) the initial length of the cyclic extension;
c) flags indicating the use of the optional band, 25 – 138 kHz.

The parameters above shall be encoded using the information fields specified in 61.4.

62.3.4.9.2 Replacement of 18.2, "Description of signals"

The carrier set and signals used are specified in 61.4.

62.3.4.9.3 Replacement of 18.3, "Message coding format"

The message coding format and field definition tables are specified in 61.4.

62.3.4.9.4 Replacement of 18.4.1. "Handshake - 10PASS-TS-O"

The detailed procedures for handshake at the 10PASS-TS-O are defined in Recommendation G.994.1. A 10PASS-TS-O, after power-up, loss of signal, recovery from errors during the initialization procedure, shall enter the initial G.994.1 state C-SILENT1. The 10PASS-TS-O may transition to the Initialization Reset Procedure under instruction from the network. From either state, operation shall proceed according to the procedures defined in G.994.1.

If Recommendation G.994.1 procedures select 10PASS-TS as the mode of operation, the10PASS-TS-O shall transition to state O-QUIET at the conclusion of G.994.1 operation.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 441 of 717

A 10PASS-TS-O wishing to indicate 10PASS-TS capabilities during in a G.994.1 CL message shall do so by setting to 1_b the Level 1 SPar(1)10PASS-TS bit as defined in G.994.1. The NPar(2) and SPar(2) fields corresponding to the "10PASS-TS" Level 1 bit are defined in 61.4. For each Level 2 SPar(2) bit set to 1_b, a corresponding NPar(3) field shall also be present. These NPar(3) fields are defined in 61.4. The Level 2 bits in a CL message are defined in Table 62–5 and Table 62–6.

Table 62–5—10PASS-TS-O CL message NPar(2) bit definitions

NPar(2) bit	Definition
Upstream use of 25 kHz–138kHz band	If set to 1_b, signifies that the 10PASS-TS-O is capable of using the band between 25 kHz and 138 kHz and that the band can be used for the upstream transmission.
Downstream use of 25 kHz 138kHz band	If set to 1_b, signifies that the 10PASS-TS-O is capable of using the band between 25 kHz and 138 kHz and that the band can be used for the downstream transmission.
EOC-Clear	If set to 1_b, signifies that the 10PASS-TS-O supports transmission and reception of G.997.1 OAM frames.

Table 62–6—10PASS-TS-O CL message SPar(2) bit definitions

NPar(2) bit	Definition
Used bands in upstream	The use of this bit is optional. If set to 1_b, indicates the used upstream bands. The optional band between 25 kHz and 138 kHz shall not be included.
Used bands in downstream	The use of this bit is optional. If set to 1_b, indicates the used down-stream bands. The optional band between 25 kHz and 138 kHz shall not be included.
IDFT/DFT size	Always set to 1_b in a CL message. Indicates the maximum IDFT/DFT size that 10PASS-TS-O can support. The value shall be present in the corresponding NPar(3) field.
Initial length of *CE*	If set to 0_b, it signifies that the 10PASS-TS-O can support only the mandatory cyclic extension length of $40*2^n$ for a number of tones equal to $256*2^n$. If set to 1_b in a CL message, it indicates the initial sample length of the cyclic extension that 10PASS-TS-O can support. It also signifies that the 10PASS-TS-O can support CE lengths other than the mandatory length. The value shall be present in the corresponding NPar(3) field. If one of the modems supports only the mandatory value, then this value shall be used.
RFI bands	The use of this bit is optional. If set to 1_b, indicates the RFI bands.

A PHY selecting 10PASS-TS mode of operation in a G.994.1 MS message shall do so by setting to 1_b the Level 1 SPar(1) 10PASS-TS-O bit as defined in G.994.1. The NPar(2) and SPar(2) fields corresponding to this bit are defined in 61.3. For each Level 2 SPar(2) bit set to 1b, a corresponding NPar(3) field shall also be present, as defined in 61.3. The Level 2 bits in an MS message from the 10PASS-TS-O are defined in Table 62–7 and Table 62–8.

If both bits Upstream use of optional band and Downstream use of optional band are enabled in the CL and CLR message, one and only one of the bits shall be set to 1_b in an MS message sent from the 10PASS-TS-O, and the use of the band between 25 kHz and 138 kHz is at the 10PASS-TS-O's discretion. If the 10PASS-TS-O and 10PASS-TS-R have no common usage of the optional band, both bits shall be set to 0_b in an MS message sent from the 10PASS-TS-O.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 442 of 717

Table 62–7—10PASS-TS-O MS message NPar(2) bit definitions

NPar(2) bit	Definition
Upstream use of 25 kHz-138 kHz band	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It signifies that the band between 25kHz and 138kHz shall be used for the upstream transmission.
Downstream use of 25 kHz-138kHz band	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It signifies that the band between 25kHz and 138kHz shall be used for the downstream transmission.
EOC-Clear	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. Signifies that both 10PASS-TS-O and 10PASS-TS-R may transmit and receive G.997.1 OAM frames.

Table 62–8—10PASS-TS-O MS message SPar(2) bit definitions

NPar(2) bit	Definition
Used bands in upstream	Always set to 0_b in an MS message.
Used bands in downstream	Always set to 0_b in an MS message.
IDFT/DFT size	Always set to 1_b in an MS message. Indicates the maximum IDFT/ DFT size that both 10PASS-TS-O and 10PASS-TS-R can support. The value shall be present in the corresponding NPar(3) field.
Initial length of *CE*	Set to 0_b if and only if this bit was set to 0_b in the last previous CL message or the last previous CLR message, or both. It signifies that both 10PASS-TS-O and 10PASS-TS-R shall use only the mandatory cyclic extension length. Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It indicates the initial sample length of the cyclic extension. It also signifies that both 10PASS-TS-O and 10PASS-TS-R can support CE lengths other than the mandatory length. The value shall be given in the corresponding NPar(3) field.
RFI bands	Always set to 0_b in an MS message.

62.3.4.9.5 Replacement of 18.4.2, “Handshake - 10PASS-TS-R”

The detailed procedures for handshake at the 10PASS-TS-R are defined in Recommendation G.994.1. An 10PASS-TS-R, after power-up, loss of signal, recovery from errors during the initialization procedure, shall enter the initial G.994.1 state R-SILENT0. Upon command from the host controller, the 10PASS-TS-R shall initiate handshaking by invoking the Initialization Reset Procedure. Operation shall then proceed according to the procedures defined in G.994.1.

If Recommendation G.994.1 procedures select 10PASS-TS as the mode of operation, the 10PASS-TS-R shall transition to state R-QUIET at the conclusion of G.994.1 operation.

A 10PASS-TS-R wishing to indicate 10PASS-TS capabilities during in a G.994.1 CLR message shall do so by setting to 1_b the Level 1 SPar(1) 10PASS-TS bit as defined in G.994.1. The NPar(2) and SPar(2) fields corresponding to the “10PASS-TS” Level 1 bit are defined in 61.4. For each Level 2 SPar(2) bit set to 1_b, a corresponding NPar(3) field shall also be present. These NPar(3) fields are defined in 61.4. The Level 2 bits in a CLR message are defined in Table 62–9 and Table 62–10.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 443 of 717

Table 62–9—10PASS-TS-R CLR message NPar(2) bit definitions

NPar(2) bit	Definition
Upstream use of 25 kHz-138 kHz band	If set to 1_b, signifies that the 10PASS-TS-R is capable of using the band between 25 kHz and 138 kHz and that the band can be used for the upstream transmission.
Downstream use of 25 kHz-138kHz band	If set to 1_b, signifies that the 10PASS-TS-R is capable of using the band between 25 kHz and 138 kHz and that the band can be used for the downstream transmission.
EOC-Clear	If set to 1_b, signifies that the 10PASS-TS-R supports transmission and reception of G.997.1 OAM frames.

Table 62–10—10PASS-TS-R CLR message SPar(2) bit definitions

NPar(2) bit	Definition
Used bands in upstream	Always set to 0_b in a CLR message.
Used bands in downstream	Always set to 0_b in a CLR message.
IDFT/DFT size	Always set to 1_b in a CLR message. Indicates the maximum IDFT/ DFT size that 10PASS-TS-R can support. The value shall be present in the corresponding NPar(3) field.
Initial length of *CE*	If set to 0_b, it signifies that the 10PASS-TS-R can support only the mandatory cyclic extension length of $40*2^n$ for a number of tones equal to $256*2^n$. If set to 1_b in a CLR message, it indicates the initial sample length of the cyclic extension that 10PASS-TS-R can support. It also signifies that the 10PASS-TS-R can support CE lengths other than the mandatory length. The value shall be present in the corresponding NPar(3) field. If one of the modems supports only the mandatory value, then this value shall be used.
RFI bands	Always set to 0_b in a CLR message.

A 10PASS-TS-R selecting 10PASS-TS mode of operation in a G.994.1 MS message shall do so by setting to 1_b the Level 1 SPar(1) 10PASS-TS bit as defined in G.994.1. The NPar(2) and SPar(2) fields corresponding to this bit are defined in 61.4. For each Level 2 SPar(2) bit set to 1_b, a corresponding NPar(3) field shall also be present, as defined in 61.4. The Level 2 bits in an MS message from the 10PASS-TS-R are defined in Table 62–11 and Table 62–12.

If both bits Upstream use of optional band and Downstream use of optional band are enabled in the CL and CLR message, one and only one of the bits shall be set to 1_b in an MS message sent from the 10PASS-TS-R, and the use of the band between 25 kHz and 138 kHz shall be at the 10PASS-TS-R's discretion. If the 10PASS-TS-O and 10PASS-TS-R have no common usage of the optional band, both bits shall be set to 0_b in an MS message sent from the 10PASS-TS-R.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 444 of 717

Table 62–11—10PASS-TS-R MS message NPar(2) bit definitions

NPar(2) bit	Definition
Upstream use of 25kHz-138kHz band	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It signifies that the band between 25kHz and 138kHz shall be used for the upstream transmission.
Downstream use of 25kHz-138kHz band	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It signifies that the band between 25kHz and 138kHz shall be used for the downstream transmission.
EOC-Clear	Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. Signifies that both 10PASS-TS-O and 10PASS-TS-R may transmit and receive G.997.1 OAM frames.

Table 62–12—10PASS-TS-R MS message SPar(2) bit definitions

NPar(2) bit	Definition
Used bands in upstream	Always set to 0_b in an MS message.
Used bands in downstream	Always set to 0_b in an MS message.
IDFT/DFT size	Always set to 1_b in an MS message. Indicates the maximum IDFT/DFT size that both 10PASS-TS-O and 10PASS-TS-R can support. The value shall be present in the corresponding NPar(3) field.
Initial length of *CE*	Set to 0_b if and only if this bit was set to 0_b in the last previous CL message or the last previous CLR message, or both. It signifies that both 10PASS-TS-O and 10PASS-TS-R shall use only the mandatory cyclic extension length. Set to 1_b if and only if this bit was set to 1_b in both the last previous CL message and the last previous CLR message. It indicates the initial sample length of the cyclic extension. It also signifies that both 10PASS-TS-O and 10PASS-TS-R can support CE lengths other than the mandatory length. The value shall be given in the corresponding NPar(3) field.
RFI bands	Always set to 0_b in an MS message.

62.3.5 Transmission medium interface characteristics

This subclause specifies the interface between the transceiver and the transmission medium (U2 reference point). The interface at U1 reference point (see MCM-VDSL Section 5.1 for VDSL reference model) is specified by the corresponding characteristics of the service splitter. The definition of the service splitter is outside the scope of this standard. Relevant specifications may be found in MCM-VDSL Clause 21 and Clause 22.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 445 of 717

62.3.5.1 Transmit signal characteristics

62.3.5.1.1 Wide-band power

The average wide-band power of the transmitted 10PASS-TS signal measured over the frequency range between 25 kHz to 12 MHz shall be no greater than the values listed in Table 62–13 when terminated with resistive impedance of R_V = 100 Ohm.

Table 62–13—10PASS-TS maximum transmit power

Central office deployment scenario		Cabinet deployment scenario	
Downstream [dBm]	**Upstream [dBm]**	**Downstream [dBm]**	**Upstream [dBm]**
14.5	14.5	11.5	14.5

NOTES
1—For compliance with this requirement, the 10PASS-TS transceiver is terminated with the impedance R_V and configured to transmit pseudo-random data with any repetitive framing patterns enabled.
2—Power is measured across the termination resistance of R_V. No energy is inserted into the POTS/ISDN port of the splitter (if applied) during this test.

62.3.5.1.2 Power spectral density (PSD)

Transmit PSD is characterized by the PSD template and PSD mask. PSD templates and masks are defined in Annex 62A.

62.3.5.1.3 Egress control

To avoid potential harm to amateur radio service due to radiated emission from 10PASS-TS, it shall be possible to reduce the PSD of the transmit signal within the amateur radio bands. Specifications for egress power control are described in Annex 62A.

62.3.5.2 Termination impedance

A termination impedance of R_v = 100 Ohm (purely resistive, either source or load) shall be used over the entire 10PASS-TS frequency band for both the 10PASS-TS-O and 10PASS-TS-R when matching to the metallic wire-pair.

This termination impedance approximates (and is based upon) the insertion-point impedance of the 10PASS-TS test loop. It enables a compromise high-frequency impedance match to the various types of unshielded cable in metallic access networks.

62.3.5.3 Return loss

The return loss requirement is defined to limit signal power uncertainties due to the tolerance of the line interface impedance. The return loss *RL* specifies the amount of reflected differential signal upon a reference impedance R_V

$$RL = 20 \times \log \left| \frac{Z + R_V}{Z - R_V} \right| \quad (62–5)$$

where Z is the internal impedance of the VTU. Note that in Equation (62–5), the log is taken to base 10, such that *RL* is expressed in dB.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 446 of 717

The in-band return loss value of the 10PASS-TS transceiver shall be greater than or equal to 12 dB. The out-of-band return loss value shall be greater than or equal or 3 dB. In-band and out-of-band frequencies are defined by the frequency plan as shown in Figure 62–3 and by the transmit direction.

The value of 12 dB assumes a flat transmit PSD is applied over the entire in-band region. Requirements may be relaxed in the frequency ranges of reduced PSD values. The exact value requirements are outside the scope of this standard.

The return loss shall be measured on a resistive test load of R_V = 100 Ohm while the tested implementation of the 10PASS-TS transceiver is powered.

NOTE—If a splitter is used, the return-loss requirements should be met for the full range of possible values of the POTS/ISDN port termination.

62.3.5.4 Output signal balance

Output signal balance (*OSB*) is a measure of unwanted longitudinal signals at the output of the transceiver, as defined by Equation (62–6). The longitudinal output voltage (V_{cm}) to the differential output voltage (V_{diff}) ratio shall be measured while the 10PASS-TS transmitter is active in accordance with ITU-T Recommendation G.117 and ITU-T Recommendation O.9.

$$OSB = 20\log\left|\frac{V_{diff}}{V_{cm}}\right| \quad (62–6)$$

The *OSB* of the 10PASS-TS transceiver shall be equal to or greater than 35 dB in the entire 10PASS-TS band.

NOTE—The equipment balance should be better than the anticipated cable balance in order to minimize the unwanted emissions and susceptibility to external RFI. The typical worst case balance for an aerial drop-wire has been observed to be in the range 30 dB – 35 dB, therefore the balance of the 10PASS-TS equipment should be equal or better.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 447 of 717

62.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 62, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS[18]

62.4.1 Introduction

The supplier of a protocol implementation that claimed to conform to Clause 62, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed desription of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

62.4.2 Identification

62.4.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

62.4.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[18]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 448 of 717

62.4.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
10PPMA	MCM-VDSL based PMA	62.2	The PMA based on the PMS-TC specified in American National Standard T1.424 is implemented.	M	Yes [ ]
10PPMD	MCM-VDSL based PMD	62.3	The PMD based on the PMD specified in American National Standard T1.424 is implemented.	M	Yes [ ]

62.4.4 PICS proforma tables for the Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 10PASS-TS

62.4.4.1 MCM-VDSL based PMA

Item	Feature	Subclause	Value/Comment	Status	Support
10PPMA-1	DMT PMA functional specifications	62.2	All data bytes are transmitted MSB first.	M	Yes [ ]
10PPMA-2	DMT PMA functional specifications	62.2	All serial processing is performed LSB first, with the outside world MSB considered as the VDSL LSB.	M	Yes [ ]
10PPMA-3	Specific requirements and exceptions	62.2.4	The 10PASS-TS PMA complies to the requirements of MCM-VDSL Section 9.3, with the exception of support for the fast path, support for V>1, NTR, and TPS-TC specific bits as listed.	M	Yes [ ]
10PPMA-4	Specific requirements and exceptions: Reed-Solomon	62.2.4.2	The 10PASS-TS PMA supports Reed-Solomon settings (144,128) and (240, 224).	M	Yes [ ]
10PPMA-5	Specific requirements and exceptions: Interleaver	62.2.4.2	For (N,K) = (144,128) the following values for M and I are supported: I=36 and M between 2 and 52. For (N,K)=(240,224) the following values for M and I are supported: I=30 and M between 2 and 62.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 449 of 717

62.4.4.2 MCM-VDSL based PMD

Item	Feature	Subclause	Value/Comment	Status	Support
10PPMD-1	Specific requirements and exceptions	62.3.4	The PMD complies to the requirements of MCM-VDSL Section 8, Section 10, Section 11 and Section 12, with the exceptions listed.	M	Yes [ ]
10PPMD-2	Duplexing and Modulation	62.3.4.1	The PMD uses Frequency Division Duplexing to separate upstream and downstream transmission.	M	Yes [ ]
10PPMD-3	Duplexing and Modulation	62.3.4.1	The PMD supports modulation of N_{SC} = 4,096 subcarriers.	M	Yes [ ]
10PPMD-4	Duplexing and Modulation	62.3.4.1	The PMD supports modulation of B_{max_d} = 12 bits per downstream subcarrier and B_{max_u} = 12 bits per upstream subcarrier.	M	Yes [ ]
10PPMD-5	Duplexing and Modulation	62.3.4.1	Disjoint subsets of the N_{SC} sub-carriers are defined for use in the downstream and upstream directions.	M	Yes [ ]
10PPMD-6	Duplexing and Modulation	62.3.4.1	The exact subsets of sub-carriers used to modulate data in each direction are determined during initialization, based on management system settings and the signal-to-noise ratios of the sub-channels.	M	Yes [ ]
10PPMD-7	Duplexing and Modulation	62.3.4.1	The use of the band between 25 kHz and 138 kHz is negotiated during the initialization to indicate if the capability exists and select one of the following options: use for upstream transmission, use for downstream transmission, not used.	M	Yes [ ]
10PPMD-8	Duplexing and Modulation	62.3.4.1	10PASS-TS-O PMD supports the transmission of a pilot tone on any downstream tone.	M	Yes [ ]
10PPMD-9	Upstream Power Back-Off	62.3.4.1	Upstream power back-off is applied to mitigate the effects of FEXT from short lines into long lines in distributed cable topologies.	M	Yes [ ]
10PPMD-10	Upstream Power Back-Off	62.3.4.1	The PMD is capable of performing frequency-dependent power back-off.	M	Yes [ ]
10PPMD-11	Upstream Power Back-Off	62.3.4.1	It is possible for the network management system to set the limiting transmit PSD template PSD_0 for the 10PASS-TS-R to one of the standard transmit PSD templates as defined in the applicable section of 62A.3.4.	M	Yes [ ]
10PPMD-12	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-R PMD performs UPBO autonomously, i.e., without sending any significant information to the 10PASS-TS-O until the UPBO is applied.	M	Yes [ ]
10PPMD-13	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-O is capable of adjusting the transmit PSD selected by the 10PASS-TS-R, after UPBO has been applied. The adjusted transmit PSD is subject to the limitations given in the applicable section of 62A.3.3.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 450 of 717

10PPMD-14	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-R estimates the insertion losses of the upstream bands based on the received downstream signals. The 10PASS-TS-R explicitly estimates the electrical length of its line, kl_0, and uses this value to calculate the transmit PSD template TxPSD per Equation (62–1) and Equation (62–2).	M	Yes [ ]
10PPMD-15	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-R adapts its transmit signal PSD to conform to the template TxPSD and the corresponding PSD mask which is defined in the applicable section of 62A.3.3. The same bandwidth as for all regular transmit PSD masks defined in the applicable section of 62A.3.3 are used to check the conformance of TxPSD with power back-off. Conformance with the PSD template is verified using a 100 kHz sliding window in the in-band frequency range below 1 MHz and a 1 MHz sliding window in the in-band frequency range above 1 MHz.	M	Yes [ ]
10PPMD-16	Upstream Power Back-Off	62.3.4.1	PSD_REF is input via the management interface.	M	Yes [ ]
10PPMD-17	Upstream Power Back-Off	62.3.4.1	PSD_REF is transmitted from the 10PASS-TS-O to the 10PASS-TS-R.	M	Yes [ ]
10PPMD-18	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-R takes a tone-by-tone minimum of this computed PSD and the maximum allowed transmit PSD in the upstream direction. The result is used as the initial upstream transmit PSD.	M	Yes [ ]
10PPMD-19	Upstream Power Back-Off	62.3.4.1	Upon receiving signals from the 10PASS-TS-R, the 10PASS-TS-O compares the actual received PSD to the reference PSD. If necessary, it instructs the 10PASS-TS-R to fine-tune its PSD.	M	Yes [ ]
10PPMD-20	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-O has the capability to directly impose a maximum allowed transmit PSD at the 10PASS-TS-R.	M	Yes [ ]
10PPMD-21	Upstream Power Back-Off	62.3.4.1	The maximum transmit PSD is input via the management interface.	M	Yes [ ]
10PPMD-22	Upstream Power Back-Off	62.3.4.1	The maximum transmit PSD is transmitted from 10PASS-TS-O to 10PASS-TS-R during initialization.	M	Yes [ ]
10PPMD-23	Upstream Power Back-Off	62.3.4.1	The 10PASS-TS-O allows the operator to select between the UPBO method based on Reference PSD and the UPBO method based on maximum transmit PSD.	M	Yes [ ]
10PPMD-24	Handshake	62.3.4.9	The handshake uses the 4.3125kHz signalling family and the duplex transmission mode.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 451 of 717

10PPMD-25	Handshake	62.3.4.9	The handshake proceeds as specified in 61.4.	M	Yes [ ]
10PPMD-26	Wide-band power	62.3.5.1.1	The average wide-band power of the transmitted 10PASS-TS signal measured over the frequency range between 25 kHz to 12 MHz is no greater than the values listed in Table 62–13 when terminated with resistive impedance of RV = 100 Ohm.	M	Yes [ ]
10PPMD-27	Egress control	62.3.5.1.3	To avoid potential harm to amateur radio service due to radiated emission from 10PASS-TS, it is possible to reduce the PSD of the transmit signal within the amateur radio bands.	M	Yes [ ]
10PPMD-28	Termination impedance	62.3.5.2	A termination impedance of Rv = 100 Ohm is used over the entire 10PASS-TS frequency band for both the 10PASS-TS-O and 10PASS-TS-R when matching to the metallic wire-pair.	M	Yes [ ]
10PPMD-29	Return loss	62.3.5.3	The in-band return loss value of the 10PASS-TS transceiver are greater than or equal to 12 dB.	M	Yes [ ]
10PPMD-30	Return loss	62.3.5.3	The out-of-band return loss value are greater than or equal or 3 dB.	M	Yes [ ]
10PPMD-31	Return loss	62.3.5.3	Requirements are relaxed in the frequency ranges of reduced PSD values.	O	Yes [ ] No [ ]
10PPMD-32	Return loss	62.3.5.3	The return loss are measured on a resistive test load of R_V = 100 Ohm while the tested implementation of the 10PASS-TS transceiver is powered.	M	Yes [ ]
10PPMD-33	Output signal balance	62.3.5.4	The longitudinal output voltage to the differential output voltage ratio is measured while the VTU transmitter is active in accordance with ITU-T Recommendation G.117 and ITU-T Recommendation O.9.	M	Yes [ ]
10PPMD-34	Output signal balance	62.3.5.4	The OSB of the 10PASS-TS transceiver is equal to or greater than 35 dB in the entire 10PASS-TS band.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 452 of 717

63. Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL

63.1 2BASE-TL Overview

63.1.1 Scope

This clause specifies the 2BASE-TL Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD) sublayer for voice grade twisted-pair wiring. In order to form a complete 2BASE-TL PHY, the 2BASE-TL PMA and PMD are integrated with the TC and PCS of Clause 61. Parts of register 3.0, parts of register 3.4 and registers 3.60 through 3.73 specified in Clause 45 may be used to control the PCS of Clause 61. Parts of register 6.0 and registers 6.16 through 6.23 specified in Clause 45 may be used to control the TC sublayer of Clause 61. Registers 1.16 through 1.42 and 1.80 through 1.109 specified in Clause 45 may be used to control the 2BASE-TL PMA and PMD.

63.1.2 Objectives

The following are the objectives for the 2BASE-TL PMA and PMD:

a) To provide 2 Mb/s encapsulated packet data rate at the $\alpha(\beta)$-interface.

b) To provide full duplex operation.

c) To provide for operating over non-loaded voice grade twisted pair cable at distances up to 2700 m.

d) To provide a communication channel with a mean bit error ratio, at the $\alpha(\beta)$-interface, of less than one part in 10^7 with 5 dB noise margin.

63.1.3 Relation of 2BASE-TL to other standards

The specifications of the 2BASE-TL PMA and PMD are based on the SHDSL transceiver (PMD and PMS-TC) specified in ITU-T Recommendation G.991.2 “Single-Pair High-Speed Digital Subscriber Line (SHDSL) transceivers”.

63.1.4 Summary of Physical Medium Attachment (PMA) specification

This layer is defined by the $\alpha(\beta)$-interface and the I-interface. Figure 63–1 shows a functional diagram of the 2BASE-TL PMA layer functionality. The payload is formed into a 2BASE-TL PMA frame with overhead added (for example, the PME aggregation Header). The framed data is then scrambled and sent to the PMD sublayer. One distinguishes between the data mode PMA specification which is used during normal data operation and the activation PMA specification which is used when the PMD is training.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 453 of 717

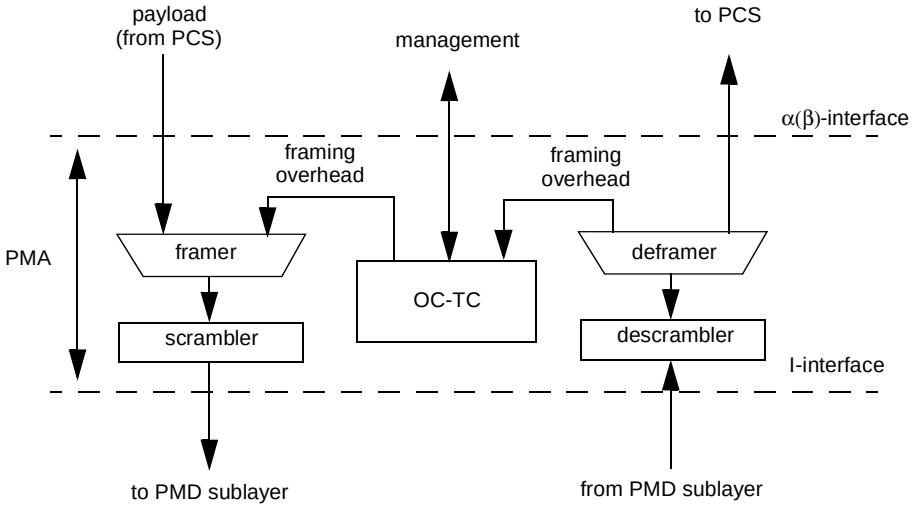


Figure 63–1—Diagram of PMA sublayer

63.1.4.1 α(β)-interface

A complete definition of the α(β)-interface is contained in 61.3.2. The signal PMA_receive_synchronized, defined in 61.3.2.2, shall be asserted when the LOSW bit is set to 0 (see 63.2.2.2), and deasserted when the LOSW is set to 1.

63.1.4.2 The I-interface

The I_O and I_R reference points define interfaces between the PMA and PMD in the 2BASE-TL-O and 2BASE-TL-R, respectively. Both interfaces are functional, application independent and identical. Both interfaces are defined by the following signal flows:

a) Data flow
b) Synchronization flow

The specification of the I-interface is implicit in ITU-T Recommendation G.991.2.

63.1.4.2.1 The I Data Flow

The data flow consists of two octet-oriented streams, both with the PMA frame format, with the bit rates defined by the PMD transmission profile:

a) Transmit data (Tx)
b) Receive data (Rx)

If data streams are implemented serially, the LSB of each octet (i.e. b_8 of Figure 61–16) shall be sent first. In section 7.1.1 of G.991.2, with i = 0, the payload blocks are made of a stream of octets. Each octet consists of 8 bits. The first bit of each octet (i.e. lowest frame bit number in an octet) maps to b_8 in Figure 61–16 and the last bit of each octet maps to b_1 of Figure 61–16.

Each stream bit rate value is set during PMD configuration.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 454 of 717

63.1.4.2.2 The I Synchronization Flow

The synchronization flow consists of the transmitted and received octet synchronization signals (Clko_t, Clko_r). Optional transmit and receive bit-synchronization signals (Clkp_t, Clkp_r) are defined too.

Synchronization signals are asserted by the PMD and directed towards the PMA.

The synchronization signals are described in Table 63–1.

Table 63–1—I-interface signals

Signal(s)	Description	Direction	Notes
Data Signals			
Tx	Transmit data stream	PMA → PMD	Transmission frame format.
Rx	Receive data stream	PMA ← PMD	
Synchronization Signals			
Clko_t	Transmitted octet timing	PMA ← PMD	
Clko_r	Received octet timing	PMA ← PMD	
Clkp_t	Transmitted bit timing	PMA ← PMD	Optional
Clkp_r	Received bit timing	PMA ← PMD	Optional

63.1.4.3 Operation Channel (OC)

The OC-TC function of the PMA shall receive the EOC and overhead indicators over the OC-TC interface. For each 2BASE-TL PMA frame, the OC shall deliver a fixed number of embedded operations channel (EOC) and overhead indicators bits to the framer. These bits shall be included in the overhead sections of the 2BASE-TL PMA frames.

63.1.5 Summary of Physical Medium Dependent (PMD) specification

The PMD specification is based on Pulse Amplitude Modulation (PAM) and is divided into three consecutive phases, summarized as:

a) Preactivation: during this phase, the PMDs determine each other capabilities and the bit rate they will operate at in data mode. Reference section 6.3.1 (included in this standard per 63.3.2.2) describes the preactivation reference model. The preactivation uses G.994.1 as a handshake mechanism to exchange parameters in accordance with the specifications in 61.4. It also offers an optional line probing capability. The line probe uses 2-level PAM signals to determine a suitable bit rate to run at on the copper link.

b) Activation: during this phase, the PMDs train and exchange information necessary to adapt and operate the various filters and processes necessary during data mode operation. Reference section 6.2.1 describes the Activation reference model. The activation uses 2-level PAM to train the various filters.

c) Data Mode: once pre-activation and activation are complete, the PMD can start transmitting payload data. Reference section 6.1.1 describes the Data Mode reference model.

NOTE—Line activation takes place after entire discovery and PME aggregation operation.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 455 of 717

63.2 2BASE-TL PMA functional specifications

The 2BASE-TL PMA is specified by incorporating the SHDSL standard, ITU-T Recommendation G.991.2 (02/2001) with the changes specified in G.991.2 Amendment 1 (11/2001), by reference, with the modifications noted below. This standard provides support for voice-grade twisted pair. For improved legibility in this clause, ITU-T Recommendation G.991.2 and G.991.2 Amendment 1, will henceforth be referred to as G.991.2.

63.2.1 General exceptions

The 2BASE-TL PMA is precisely the PMS-TC specified in G.991.2, with the following general modifications:

a) There are minor terminology differences between this standard and G.991.2 that do not cause ambiguity. The terminology used in 2BASE-TL was chosen to be consistent with other IEEE 802 standards, rather than with G.991.2. Terminology is both defined and consistent within each standard. Special note should be made of the interpretations shown in Table 63–2.

Table 63–2—Interpretation of general G.991.2 terms and concepts

G.991.2 term or concept	Interpretation for 2BASE-TL
PMS-TC	PMA
STU-C, LT	2BASE-TL-O
STU-R, NT	2BASE-TL-R
Transmission medium dependent interface, U-interface	MDI
byte	octet

b) The 2BASE-TL PMA supports only one channel of user data with an associated γ-interface.
c) The 2BASE-TL PMA does not support the optional “four-wire mode”. Operation over multiple pairs is optional; if implemented, multi-pair operation shall comply to the specifications in 61.2.2.
d) The 2BASE-TL PMA does not support “plesiochronous mode”.
e) The 2BASE-TL PMA shall be octet oriented; hence, the bit oriented parameter *i* defined for Equation (63–1) shall be equal to *0* in all cases.
f) The 2BASE-TL PMA does not support the notion of “sub-blocks” in the Payload Block. Each payload block consists of a contiguous sequence of 12*n* octets, with parameter *n* as defined for Equation (63–1).

63.2.2 Specific requirements and exceptions

The 2BASE-TL PMA shall comply to the requirements of G.991.2 Section 7 and Section 9 with the exceptions listed below. Where there is conflict between specifications in G.991.2 and those in this standard, those of this standard shall prevail.

Implementation of optional specifications in G.991.2 is not required for compliance with this standard. Reference Section 8 (TPS-TC Layer Functional Characteristics), Reference Annex D (Signal Regenerator Operation), Reference Annex E (Application-specific TPS-TC Framing) and Reference Appendices I, II and III are out of scope for 2BASE-TL PMA. Deployment of compatible versions of G.991.2 Annex D is an implementation specific option for the purposes of 2BASE-TL.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 456 of 717

63.2.2.1 Changes to 7.1, “Data Mode Operation”

Reference 7.1.1 (Frame Structure) is replaced with the following:

Table 7-1 of the Reference summarizes the SHDSL frame structure. Complete bit definitions may be found in Reference 7.1.2. The size of each payload block is defined as k bits, where $k = 96n$. The payload rate r (in kb/s) is given by Equation (63–1) and Equation (63–3), with $i = 0$. The value of n is limited by Equation (63–2) and Equation (63–4).

Reference 7.1.2.6 (Stuff Indicator bits) is replaced with the following:

2BASE-TL operates in synchronous mode, therefore *sbid1* and *sbid2* are spare bits.

Reference 7.1.2.7 (Stuffing Bits) is replaced with the following:

2BASE-TL operates in synchronous mode, therefore *stb1* and *stb2* shall be present in every frame, and *stb3* and *stb4* shall not be present.

Reference 7.1.4 (Frame synchronization) is replaced with the following:

The precise manner in which frame synchronization is acquired or maintained is the choice of the receiver designer. Since different frame synchronization algorithms may require different values for the bits of the FSW, a provision has been made to allow the receiver to inform the far end transmitter of the particular values that are to be used for this field in the transmitted PMS-TC frame.

All other subsections of Reference 7.1 are referenced as is.

63.2.2.2 Changes to Section 9, “Management”

Referenced as is, with the exception of 9.5.5.6 where Message IDs 17 “ATM Cell Status Request”, 20 “ISDN Request”, 145 “ATM Cell Status Information” and 148 “ISDN Response” are out of scope.

63.2.2.3 Relation between the 2BASE-TL registers and the SHDSL management functions

The parameters of the various 2BASE-TL registers of the -R device, defined in Clause 45, are gathered via the SHDSL management. SNR margin, code violations, ES, SES, LOSW, UAS, SNR margin defect, Loop attenuation defect and loss of sync word failure shall be obtained in the following way:

The 2BASE-TL-O shall send a Status Request (Msg ID 11) EOC message. If there has been any change in performance status other than SNR margin since the last time a unit was polled, the peer 2BASE-TL-R shall respond with an SHDSL Network Side Performance Status (Msg ID 140) EOC message.

The following octets and bits are then mapped to the Clause 45 registers (see Table 63–3):

Otherwise, the peer 2BASE-TL-R shall respond with a Status/SNR (Msg ID 139) EOC message, in which the SNR margin is communicated in octet 2.

Loop attenuation and SNR margin threshold for both 2BASE-TL-O and 2BASE-TL-R devices shall be set in the Clause 45 register of the 2BASE-TL-O device; the 2BASE-TL-R thresholds will be passed to the 2BASE-TL-R using message ID 3.

The segment defect is defined in section 9.2.4 and uses a dedicated framing bit rather than the EOC messaging.

The retrieval of the remote vendor ID is defined in G.997.1. The use of this mechanism is outside the scope of this standard.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 457 of 717

Table 63–3—Mapping of registers to "Network Side Performance Status" EOC message octets

register	octets / bits
LOSW failure	octet 2 / bit 1
Loop attenuation defect	octet 2 / bit 2
SNR margin defect	octet 2 / bit 3
SNR margin	octet 3
Loop attenuation	octet 4
ES	octet 5
SES	octet 6
Code violations	octet 7 and 8
LOSW	octet 9
UAS	octet 10
See footnote[a].	octet 11

[a]NOTE—Bit 6 and 7 of octet 11 indicate that either an overflow or reset condition has occurred on any of the code violations / ES/ SES / LOSW / UAS registers.

NOTE—The code violation, ES, SES, LOSW and UAS in SHDSL are modulo counters. The absolute value of the counter is meaningless, however the difference in between 2 consecutive readings provides the change in code violation/ ES/SES/LOSW/UAS. If there are no changes in the performance registers, message ID 139 rather than 140 will be sent by the 2BASE-TL-R. It only contains the SNR value and none of the other parameters.

63.3 2BASE-TL PMD functional specifications

The 2BASE-TL PMD (and MDI) is specified by incorporating the SHDSL standard, ITU-T Recommendation G.991.2 (02/2001) with the changes specified in G.991.2 Amendment 1 (11/2001), by reference, with the modifications noted below. This standard provides support for voice-grade twisted pair. For improved legibility in this clause, ITU-T Recommendation G.991.2 and G.991.2 Amendment 1, will henceforth be referred to as G.991.2.

63.3.1 General exceptions

The 2BASE-TL PMD is precisely the PMD specified in G.991.2, with the following general modifications:

a) There are minor terminology differences between this standard and G.991.2 that do not cause ambiguity. The terminology used in 2BASE-TL was chosen to be consistent with other IEEE 802 standards, rather than with G.991.2. Terminology is both defined and consistent within each standard. Special note should be made of the interpretations shown in Table 63–4.
b) The 2BASE-TL PMD does not support the optional "four-wire mode". Operation over multiple pairs is optional; if implemented, multi-pair operation shall comply to the specifications in 61.2.2.
c) The 2BASE-TL PMD does not support "plesiochronous mode".
d) The 2BASE-TL PMD shall be octet oriented; hence, the bit oriented parameter *i* defined for Equation (63–1) shall be equal to *0* in all cases.
e) The 2BASE-TL PMD shall support the use of the 32-TCPAM constellation for specific rates (see 63.3.2.1).
f) The 2BASE-TL PMD shall support the use of the enhanced SHDSL[19] extended bandwidths.

[19]"Enhanced SHDSL" refers to 32TC-PAM modulation and higher values of *n* as defined in Equation (63–2) and Equation (63–4), which are not part of ITU-T Recommendation G.991.2.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 458 of 717

Table 63–4—Interpretation of general G.991.2 terms and concepts

G.991.2 term or concept	Interpretation for 2BASE-TL
PMS-TC	PMA
STU-C, LT	2BASE-TL-O
STU-R, NT	2BASE-TL-R
Transmission medium dependent interface, U-interface	MDI

63.3.2 Specific requirements and exceptions

The 2BASE-TL PMD (including MDI) shall comply to the requirements of G.991.2 Section 5 (Transport Capacity), Section 6 (PMD Layer Functional Characteristics), Section 10 (Clock Architecture), Section 11 (Electrical Characteristics), Section 12 (Conformance Testing) with the exceptions listed below. The 2BASE-TL PMD supports the requirements of G.991.2 Annex A (Regional Requirements - Region 1) and Annex B (Regional Requirements - Region 2) with the exception of performance requirements, which are replaced by Annex 63B. Where there is conflict between specifications in G.991.2 and those in this standard, those of this standard shall prevail.

Implementation of optional specifications in G.991.2 is not required for compliance with this standard. Reference Section 8 (TPS-TC Layer Functional Characteristics), Reference Annex D (Signal Regenerator Operation), Reference Annex E (Application-specific TPS-TC Framing) and Reference Appendices I, II and III are out of scope for the 2BASE-TL PMD.

63.3.2.1 Replacement of section 5, “Transport Capacity”

This recommendation specifies a two-wire operational mode for 2BASE-TL transceivers that is capable of supporting user (payload) data rates from 192 kb/s to 3.840 Mb/s, using the 16-TCPAM constellation, and 768 kb/s to 5.696 Mb/s, using the 32-TCPAM constellation. The allowed rates r (in kb/s), using the 16-TCPAM constellation, are given by:

$$r = n \times 64 + i \times 8 \quad (63–1)$$

where

$$3 \le n \le 60 . \quad (63–2)$$

The allowed rates r (in kb/s), using the 32-TCPAM constellation, are given by:

$$r = n \times 64 + i \times 8 \quad (63–3)$$

where

$$12 \le n \le 89 . \quad (63–4)$$

In all cases, i is restricted to the value of 0. See 63.3.2.4, 63.3.2.5 and 63.3.2.6 for details of specific regional requirements.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 459 of 717

63.3.2.2 Changes to section 6, "PMD Layer Functional Characteristics"

Referenced as is, with the exception of subsection 6.4 (G.994.1 Preactivation Sequence), which is supplanted by 61.4.

Section 6.1.2.3 is superseded by the following text:

Mapper:

The K+1 bits $Y_K(m)$, …, $Y_1(m)$, and $Y_0(m)$ shall be mapped to a level $x(m)$. In section 6.1.2.3 of G.991.2, the mapper function is specified for 16-TCPAM. This text extends that mapping to include both 16- and 32-TCPAM encodings. Table 63–5 shows the bit to level mapping for 16 and 32 level mapping.

Table 63–5—Mapping of bits to PAM levels

$Y_4(m)$	$Y_3(m)$	$Y_2(m)$	$Y_1(m)$	$Y_0(m)$	32-PAM (5 Bits)	16-PAM (4 Bits)
0	0	0	0	0	–31/32	–15/16
0	0	0	0	1	–29/32	–13/16
0	0	0	1	0	–27/32	–11/16
0	0	0	1	1	–25/32	–9/16
0	0	1	0	0	–23/32	–7/16
0	0	1	0	1	–21/32	–5/16
0	0	1	1	0	–19/32	–3/16
0	0	1	1	1	–17/32	–1/16
0	1	1	0	0	–15/32	1/16
0	1	1	0	1	–13/32	3/16
0	1	1	1	0	–11/32	5/16
0	1	1	1	1	–9/32	7/16
0	1	0	0	0	–7/32	9/16
0	1	0	0	1	–5/32	11/16
0	1	0	1	0	–3/32	13/16
0	1	0	1	1	–1/32	15/16
1	1	0	0	0	1/32	—
1	1	0	0	1	3/32	—
1	1	0	1	0	5/32	—
1	1	0	1	1	7/32	—
1	1	1	0	0	9/32	—
1	1	1	0	1	11/32	—

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 460 of 717

Table 63–5—Mapping of bits to PAM levels *(continued)*

1	1	1	1	0	13/32	—
1	1	1	1	1	15/32	—
1	0	1	0	0	17/32	—
1	0	1	0	1	19/32	—
1	0	1	1	0	21/32	—
1	0	1	1	1	23/32	—
1	0	0	0	0	25/32	—
1	0	0	0	1	27/32	—
1	0	0	1	0	29/32	—
1	0	0	1	1	31/32	—

63.3.2.3 Changes to section 10, “Clock Architecture”

Referenced as is, with the exception of Reference Table 10-1, which is replaced by Table 63–6.

Table 63–6—Clock Synchronization Configurations

Mode Number	2BASE-TL-O Symbol Clock Reference	2BASE-TL-R Symbol Clock Reference	Example Application	Mode
3a	Transmit data clock	Received symbol clock	Main application is synchronous transport in both directions.	Synchronous

63.3.2.4 Changes to Annex A, “Regional Requirements – Region 1”

63.3.2.4.1 General Changes

Referenced as is, with the exception of optional support for asymmetric PSD masks. Asymmetric PSD masks are not supported by 2BASE-TL.

Section A.5.3 “Span Powering” is out of scope.

63.3.2.4.2 Additional requirement: wetting current

The 2BASE-TL-R shall be capable of sustaining 20 mA of wetting (sealing) current. The maximum rate of change of the wetting current shall be no more than 20 mA per second.

NOTE—The -R device cannot be guaranteed to operate correctly if more than 20 mA (tip to ring) is sourced.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 461 of 717

63.3.2.5 Changes to Annex B, "Regional Requirements – Region 2"

63.3.2.5.1 General Changes

Referenced as is, with the exception of optional support for asymmetric PSD masks. Asymmetric PSD masks are not supported by 2BASE-TL.

Section B.5.3. "Span Powering" is out of scope.

The RL_{min} value of section B.5.2 is modified from 14 to 12 dB for the purpose of 2BASE-TL.

63.3.2.5.2 Additional requirement: wetting current

The 2BASE-TL-R shall be capable of sustaining 20 mA of wetting (sealing) current. The maximum rate of change of the wetting current shall be no more than 20 mA per second.

NOTE—The -R device cannot be guaranteed to operate correctly if more than 20 mA (tip to ring) is sourced.

63.3.2.6 Changes to Annex C, "Regional Requirements – Region 3"

Referenced as is, with the exception of optional support for asymmetric PSD masks. Asymmetric PSD masks are not supported by 2BASE-TL.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 462 of 717

63.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 63, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL[20]

63.4.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 63, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

63.4.2 Identification

63.4.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

63.4.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD), type 2BASE-TL.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[20]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 463 of 717

63.4.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
2BPMA	SHDSL based PMA	63.2	The PMA based on the PMS-TC specified in ITU-T Recommendation G.991.2 is implemented.	M	Yes [ ]
2BPMD	SHDSL based PMD	63.3	The PMD based on the PMD specified in ITU-T Recommendation G.991.2 is implemented.	M	Yes [ ]

63.4.4 PICS proforma tables for the Physical Medium Attachment (PMA) and Physical Medium Dependent (PMD) sublayers, type 2BASE-TL

63.4.4.1 SHDSL based PMA

Item	Feature	Subclause	Value/Comment	Status	Support
2BPMA-1	$\alpha(\beta)$-interface	63.1.4.1	The PMA_receive_synchronized is asserted when LOSW is “0” and deasserted when LOSW is “1”	M	Yes [ ]
2BPMA-2	The I-data flow	63.1.4.2.1	If data streams are implemented serially, the LSB of each octet (i.e. b_8 of Figure 61–16) is sent first.	M	Yes [ ]
2BPMA-3	Operation Channel	63.1.4.3	The OC-TC function of the PMA receives the EOC and overhead indicators over the OC-TC interface.	M	Yes [ ]
2BPMA-4	Operation Channel	63.1.4.3	The EOC and overhead indicators are included in the overhead sections of the 2BASE-TL PMA frames.	M	Yes [ ]
2BPMA-5	General exceptions	63.2.1	The 2BASE-TL PMA is octet oriented.	M	Yes [ ]
2BPMA-6	General exceptions	63.2.1	The bit oriented parameter i defined for Equation (63–1) and Equation (63–3) is equal to 0 in all cases.	M	Yes [ ]
2BPMA-7	Specific requirements and exceptions	63.2.2	The 2BASE-TL PMA complies to the requirements of G.991.2 Section 7.	M	Yes [ ]
2BPMA-8	Specific requirements and exceptions	63.2.2	The 2BASE-TL PMA complies to the requirements of G.991.2 Section 9.	M	Yes [ ]
2BPMA-9	Reference 7.1	63.2.2.1	2BASE-TL operates in synchronous mode. Bits stb1 and stb2 are present in every frame, and stb3 and stb4 are not present.	M	Yes [ ]
2BPMA-10	Reference 7.1	63.2.2.1	Since different frame synchronization algorithms require different values for the bits of the FSW, a provision has been made to allow the receiver to inform the far end transmitter of the particular values that are to be used for this field according to 61.4.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 464 of 717

63.4.4.2 SHDSL based PMD

Item	Feature	Subclause	Value/Comment	Status	Support
2BPMD-1	General exceptions	63.3.1	The 2BASE-TL PMD is octet oriented.	M	Yes [ ]
2BPMD-2	General exceptions	63.3.1	The 2BASE-TL PMD supports the use of the 32-TCPAM constellation for specific rates.	M	Yes [ ]
2BPMD-4	General exceptions	63.3.1	The 2BASE-TL PMD supports the use of the enhanced SHDSL extended bandwidths.	M	Yes [ ]
2BPMD-5	General exceptions	63.3.1	The bit oriented parameter *i* defined for Equation (63–1) and Equation (63–3) is equal to 0 in all cases.	M	Yes [ ]
2BPMD-6	Specific requirements and exceptions	63.3.2	The 2BASE-TL PMD complies to the requirements of G.991.2 Section 5, Section 6, Section 10, Section 11, Section 12.	M	Yes [ ]
2BPMD-7	Specific requirements and exceptions	63.3.2	The 2BASE-TL PMD complies to at least one of the three regional annexes: Annex A, Annex B, or Annex C with the exception of performance, which is defined in Annex 63B.	M	Yes [ ]
2BPMD-8	Reference section 6	63.3.2.2	The 16 & 32 TC-PAM mappings are per Table 63–5.	M	Yes [ ]
2BPMD-9	Changes to Annex A/B	63.3.2.4.2 63.3.2.5.2	The DC resistance of the 2BASE-TL-R is 1000 ohms plus or minus 10%.	M	Yes [ ]
2BPMD-10	Changes to Annex A/B	63.3.2.4.2 63.3.2.5.2	The 2BASE-TL-R is capable of sustaining 20 mA of wetting (sealing) current.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 465 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 466 of 717

64. Multi-point MAC Control

64.1 Overview

This clause deals with the mechanism and control protocols required in order to reconcile the P2MP topology into the Ethernet framework. The P2MP medium is a passive optical network (PON), an optical network with no active elements in the signal's paths from source to destination. The only interior elements used in a PON are passive optical components, such as optical fiber, splices, and splitters. When combined with the Ethernet protocol, such a network is referred to as Ethernet passive optical network (EPON).

P2MP is an asymmetrical medium based on a tree (or tree-and-branch) topology. The DTE connected to the trunk of the tree is called optical line terminal (OLT) and the DTEs connected at the branches of the tree are called optical network units (ONU). The OLT typically resides at the service provider's facility, while the ONUs are located at the subscriber premises.

In the downstream direction (from the OLT to an ONU), signals transmitted by the OLT pass through a 1:N passive splitter (or cascade of splitters) and reach each ONU. In the upstream direction (from the ONUs to the OLT), the signal transmitted by an ONU would only reach the OLT, but not other ONUs. To avoid data collisions and increase the efficiency of the subscriber access network, ONU's transmissions are arbitrated. This arbitration is achieved by allocating a transmission window (grant) to each ONU. An ONU defers transmission until its grant arrives. When the grant arrives, the ONU transmits frames at wire speed during its assigned time slot.

A simplified P2MP topology example is depicted in Figure 64–1. Clause 67 provides additional examples of P2MP topologies.

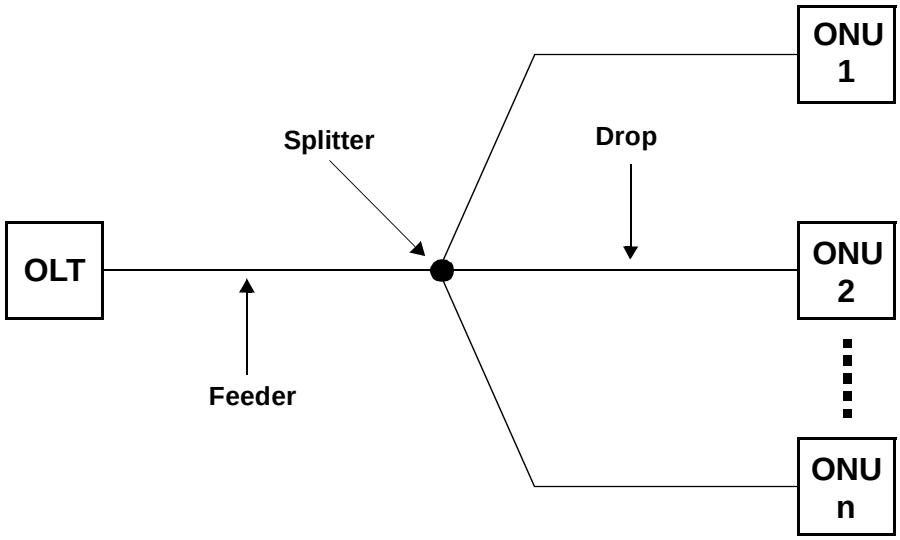


Figure 64–1—PON topology example

Topics dealt with in this clause include allocation of upstream transmission resources to different ONUs, discovery and registration of ONUs into the network, and reporting of congestion to higher layers to allow for dynamic bandwidth allocation schemes and statistical multiplexing across the PON.

This clause does not deal with topics including bandwidth allocation strategies, authentication of end-devices, quality-of-service definition, provisioning, or management.

This clause specifies the multi-point control protocol (MPCP) to operate an optical multi-point network by defining a Multi-point MAC Control sublayer as an extension of the MAC Control sublayer defined in Clause 31, and supporting current and future operations as defined in Clause 31 and annexes.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 467 of 717

Each PON consists of a node located at the root of the tree assuming the role of OLT, and multiple nodes located at the tree leaves assuming roles of ONUs. The network operates by allowing only a single ONU to transmit in the upstream direction at a time. The MPCP located at the OLT is responsible for timing the different transmissions. Reporting of congestion by the different ONUs may assist in optimally allocating the bandwidth across the PON.

Automatic discovery of end stations is performed, culminating in registration through binding of an ONU to an OLT port by allocation of a Logical Link ID (see LLID in 65.1.3.3.2), and dynamic binding to a MAC connected to the OLT.

The Multi-point MAC Control functionality shall be implemented for subscriber access devices containing point-to-multipoint physical layer devices defined in Clause 60.

64.1.1 Goals and objectives

The goals and objectives of this clause are the definition of a point-to-multi-point Ethernet network utilizing an optical medium.

Specific objectives met include:

a) Support of Point to Point Emulation (P2PE) as specified
b) Support multiple LLIDs and MAC Clients at the OLT
c) Support a single LLID per ONU
d) Support a mechanism for single copy broadcast
e) Flexible architecture allowing dynamic allocation of bandwidth
f) Use of 32 bit timestamp for timing distribution
g) MAC Control based architecture
h) Ranging of discovered devices for improved network performance
i) Continuous ranging for compensating round trip time variation

64.1.2 Position of Multi-point MAC Control within the IEEE 802.3 hierarchy

Multi-point MAC Control defines the MAC control operation for optical point-to-multi-point networks. Figure 64–2 depicts the architectural positioning of the Multi-point MAC Control sublayer with respect to the MAC and the MAC Control client. The Multi-point MAC Control sublayer takes the place of the MAC Control sublayer to extend it to support multiple clients and additional MAC control functionality.

Multi-point MAC Control is defined using the mechanisms and precedents of the MAC Control sublayer. The MAC Control sublayer has extensive functionality designed to manage the real-time control and manipulation of MAC sublayer operation. This clause specifies the extension of the MAC Control mechanism to manipulate multiple underlying MACs simultaneously. This clause also specifies a specific protocol implementation for MAC Control.

The Multi-point MAC Control sublayer is specified such that it can support new functions to be implemented and added to this standard in the future. Multi-Point Control Protocol (MPCP), the management protocol for P2MP is one of these protocols. Non-real-time, or quasi-static control (e.g., configuration of MAC operational parameters) is provided by Layer Management. Operation of the Multi-point MAC Control sublayer is transparent to the MAC.

As depicted in Figure 64–2, the layered system instantiates multiple MAC entities, using a single physical layer. The individual MAC instances offer a Point-to-point emulation service between the OLT and the ONU. An additional MAC is instantiated to communicate to all ONUs at once. This instance takes maximum advantage of the broadcast nature of the downstream channel by sending a single copy of a frame that is received by all ONUs. This MAC instance is referred to as Single Copy Broadcast (SCB).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 468 of 717

The ONU only requires one MAC instance since frame filtering operations are done at the RS layer before reaching the MAC. Therefore, MAC and layers above are emulation-agnostic at the ONU (see 65.1.3.3).

Although Figure 64–2 and supporting text describe multiple MACs within the OLT, a single unicast MAC address may be used by the OLT. Within the EPON Network, MACs are uniquely identified by their LLID which is dynamically assigned by the registration process.

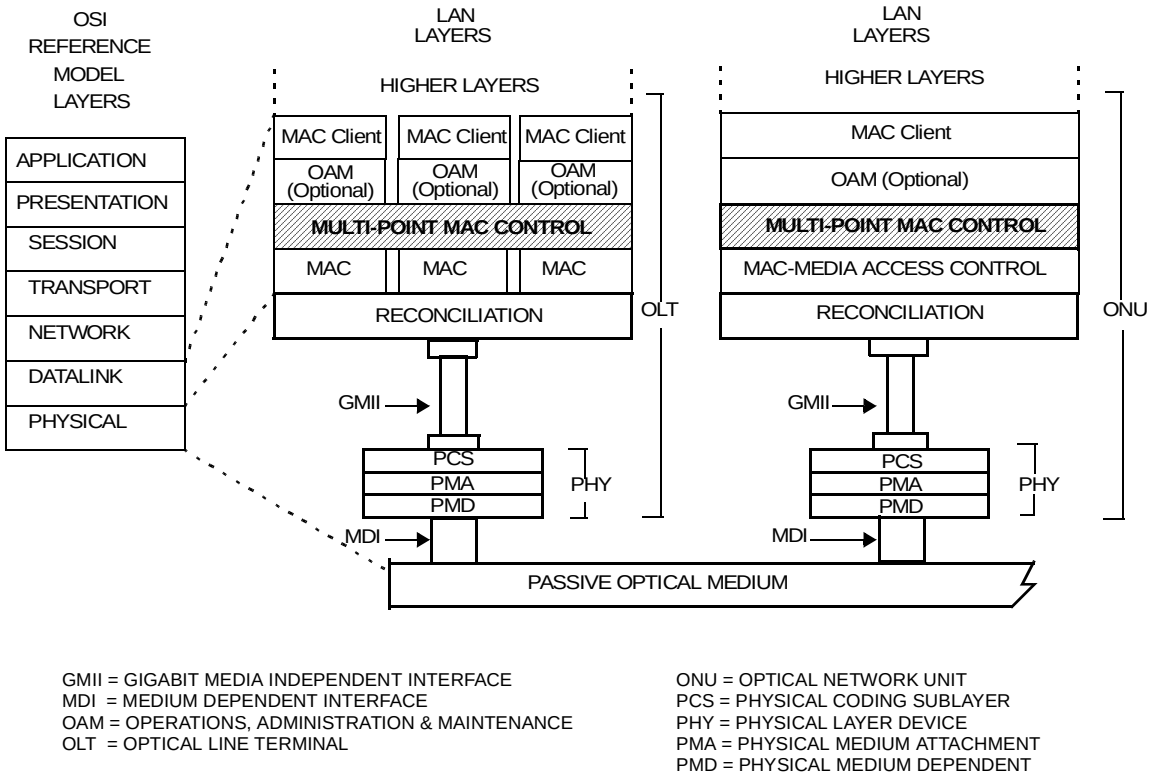


Figure 64–2—Relationship of Multi-point MAC Control and the OSI protocol stack

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 469 of 717

64.1.3 Functional block diagram

Figure 64–3 provides a functional block diagram of the Multi-point MAC Control architecture.

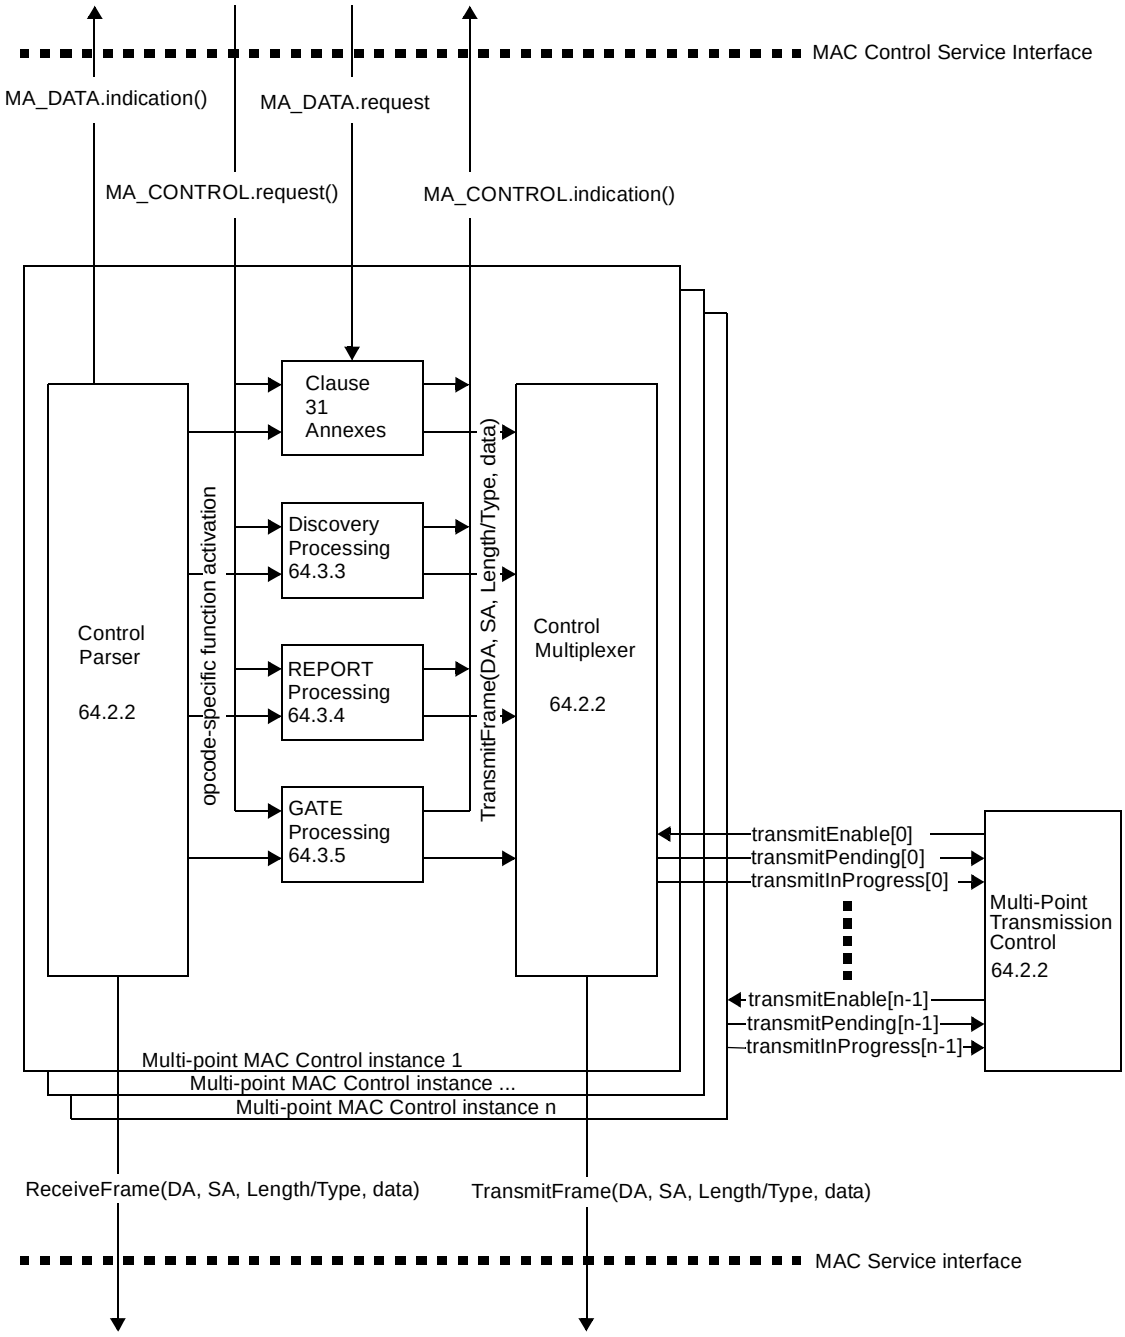


Figure 64–3—Multi-point MAC Control Functional Block Diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 470 of 717

64.1.4 Service interfaces

The MAC Client communicates with the Control Multiplexer using the standard service interface specified in Clause 2.3. Multi-point MAC Control communicates with the underlying MAC sublayer using the standard service interface specified in 4A.3.2. Similarly, Multi-point MAC Control communicates internally using primitives and interfaces consistent with definitions in Clause 31.

64.1.5 State diagram conventions

The body of this standard comprises state diagrams, including the associated definitions of variables, constants, and functions. Should there be a discrepancy between a state diagram and descriptive text, the state diagram prevails.

The notation used in the state diagrams follows the conventions of 21.5. State diagram timers follow the conventions of 14.2.3.2 augmented as follows:

a) [start x_timer, y] sets expiration of *y* to timer *x_timer.*
b) [stop x_timer] aborts the timer operation for *x_timer* asserting *x_timer_not_done* indefinitely.

The state diagrams use an abbreviation MACR as a shorthand form for MA_CONTROL.request and MACI as a shorthand form for MA_CONTROL.indication.

The vector notations used in the state diagrams for bit vector use 0 to mark the first received bit and so on (for example data[0:15]), following the conventions of 3.1 for bit ordering. When referring to an octet vector, 0 is used to mark the first received octet and so on (for example m_sdu[0..1]).

a < *b:* A function that is used to compare two (cyclic) time values. Returned value is true when *b* is larger than *a* allowing for wrap around of *a* and *b*. The comparison is made by subtracting *b* from *a* and testing the MSB. When MSB(*a*-*b*) = 1 the value true is returned, else false is returned. In addition, the following functions are defined in terms of *a* < *b*:

a>*b* is equivalent to !(*a*<*b* or *a*=*b*)
a≥*b* is equivalent to !(*a*<*b*)
a≤*b* is equivalent to !(*a*>*b*)

64.2 Multi-point MAC Control operation

As depicted in Figure 64–3, the Multi-point MAC Control functional block comprises the following functions:

a) *Multi-point Transmission Control*. This block is responsible for synchronizing Multi-point MAC Control instances associated with the Multi-point MAC Control. This block maintains the Multi-point MAC Control state and controls the multiplexing functions of the instantiated MACs.
b) *Multi-point MAC Control Instance n*. This block is instantiated for each MAC and respective MAC and MAC Control clients associated with the Multi-point MAC Control. It holds all the variables and state associated with operating all MAC Control protocols for the instance.
c) *Control Parser*. This block is responsible for parsing MAC Control frames, and interfacing with Clause 31 entities, the opcode specific blocks, and the MAC Client.
d) *Control Multiplexer*. This block is responsible for selecting the source of the forwarded frames.
e) *Clause 31 Annexes*. This block holds MAC Control actions as defined in Clause 31 annexes for support of legacy and future services.
f) *Discovery, Report and Gate Processing*. These blocks are responsible for handling the MPCP in the context of the MAC.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 471 of 717

64.2.1 Principles of Multi-point MAC Control

As depicted in Figure 64–3, Multi-point MAC Control sublayer may instantiate multiple Multi-point MAC Control instances in order to interface multiple MAC and MAC Control clients above with multiple MACs below. A unique unicast MAC instance is used at the OLT to communicate with each ONU. The individual MAC instances utilize the point-to-point emulation service between the OLT and the ONU as defined in 65.1.

At the ONU, a single MAC instance is used to communicate with a MAC instance at the OLT. In that case, the Multi-point MAC Control contains only a single instance of the Control Parser/Multiplexer function.

Multi-point MAC Control protocol supports several MAC and client interfaces. Only a single MAC interface and Client interface is enabled for transmission at a time. There is a tight mapping between a MAC service interface and a Client service interface. In particular, the assertion of the ReceiveFrame interface in MAC *j* enables the indication interface of Client *j*. Conversely, the assertion of the request service interface in Client *i* enables the TransmitFrame interface of MAC *i*. Note that the Multi-Point MAC sublayer need not receive and transmit packets associated with the same interface at the same time. Thus the Multi-point MAC Control acts like multiple MAC Controls bound together with common elements.

The scheduling algorithm is implementation dependent, and is not specified for the case where multiple transmit requests happen at the same time.

The reception operation is as follows. The Multi-point MAC Control instances generate ReceiveFrame function calls continuously to the underlying MAC instances. Since these MACs are receiving frames from a single PHY only one frame is passed from the MAC instances to Multi-point MAC Control. The MAC instance responding to the ReceiveFrame is referred to as the enabled MAC, and its service interface is referred to as the enabled MAC interface. The MAC passes to the Multi-point MAC Control sublayer all valid frames. Invalid frames, as specified in 3.4, are not passed to the Multi-point MAC Control sublayer in response to a ReceiveFrame function call.

The enabling of a transmit service interface is performed by the Multi-point MAC Control instance in collaboration with the Multi-Point Transmission Control. Frames generated in the MAC Control are given priority over MAC Client frames, in effect, prioritizing the MA_CONTROL primitive over the MA_DATA primitive, and for this purpose MA_DATA.request primitives may be delayed, discarded or modified in order to perform the requested MAC Control function. For the transmission of this frame, the Multi-point MAC Control instance enables forwarding by the MAC Control functions, but the MAC Client interface is not enabled. The reception of a frame in a MAC enables the ReceiveFrame interface of the MAC. Only one receive MAC interface will be enabled at any given time since there is only one PHY interface.

The information of the enabled interfaces is stored in the controller state variables, and accessed by the Multiplexing Control block.

The Multi-point MAC Control sublayer uses the services of the underlying MAC sublayer to exchange both data and control frames.

Receive operation at each instance:

a) A frame is received from the underlying MAC.
b) The frame is parsed according to Length/Type field
c) MAC Control frames are demultiplexed according to opcode and forwarded to the relevant processing functions
d) Data frames are forwarded to the MAC Client by asserting MA_DATA.indication primitives

Transmit operation at each instance:

a) The MAC Client signals a frame transmission by asserting MA_DATA.request, or
b) A protocol processing block attempts to issue a frame, as a result of a previous MA_CONTROL.request or as a result of an MPCP event that generates a frame.
c) When allowed to transmit by the Multi-Point Transmission Control block, the frame is forwarded.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 472 of 717

64.2.1.1 Ranging and Timing Process

Both the OLT and the ONU have 32-bit counters that increment every 16 ns. These counters provide a local time stamp. When either device transmits an MPCPDU, it maps its counter value into the timestamp field. The time of transmission of the first octet of the MPCPDU frame from the MAC Control to the MAC is taken as the reference time used for setting the timestamp value.


When the ONU receives MPCPDUs, it sets its counter according to the value in the timestamp field in the received MPCPDU.

When the OLT receives MPCPDUs, it uses the received timestamp value to calculate or verify a round trip time between the OLT and the ONU. The RTT is equal to the difference between the timer value and the value in the timestamp field. The calculated RTT is notified to the client via the MA_CONTROL.indication primitive. The client can use this RTT for the ranging process.

A condition of *timestamp drift error* occurs when the difference between OLT's and ONU's clocks exceeds some predefined threshold. This condition can be independently detected by the OLT or an ONU. The OLT detects this condition when an absolute difference between new and old RTT values measured for a given ONU exceeds the value of guardThresholdOLT (see 64.2.2.1), as shown in Figure 64–10. An ONU detects the timestamp drift error condition when absolute difference between a timestamp received in an MPCPDU and the localTime counter exceeds guardThresholdONU (see 64.2.2.1), as is shown in Figure 64–11.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 473 of 717

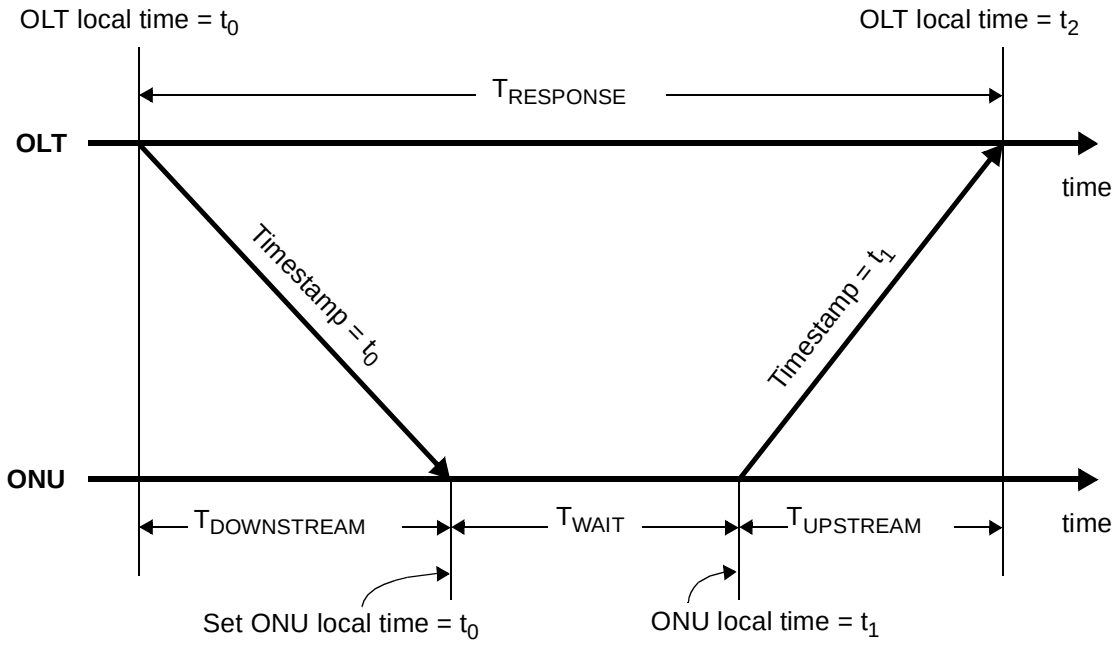

$T_{DOWNSTREAM}$ = downstream propagation delay

$T_{UPSTREAM}$ = upstream propagation delay

T_{WAIT} = wait time at ONU = $t_1 - t_0$

$T_{RESPONSE}$ = response time at OLT = $t_2 - t_0$

$$RTT = T_{DOWNSTREAM} + T_{UPSTREAM} = T_{RESPONSE} - T_{WAIT} = (t_2 - t_0) - (t_1 - t_0) = t_2 - t_1$$

Figure 64–4—Round trip time calculation

64.2.2 Multi-point transmission control, Control Parser, and Control Multiplexer

The purpose of the multi-point transmission control is to allow only one of the multiple MAC clients to transmit to its associated MAC and subsequently to the RS layer at one time by only asserting one transmitEnable signal at a time.

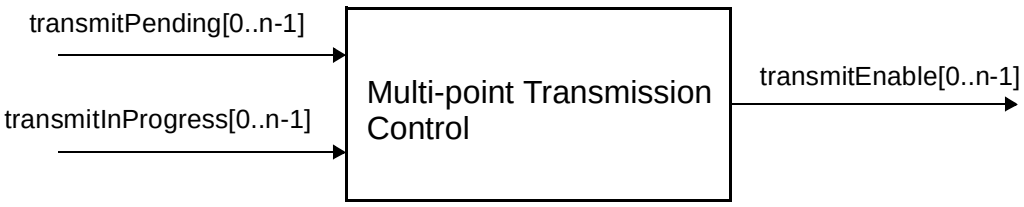


Figure 64–5—Multi-point Transmission Control Service Interfaces

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 474 of 717

Multi-point MAC Control Instance n function block communicates with the Multi-Point Transmission Control using transmitEnable[n], transmitPending[n], and transmitInProgress[n] state variables (see Figure 64–3).

The Control Parser is responsible for opcode independent parsing of MAC frames in the reception path. By identifying MAC Control frames, demultiplexing into multiple entities for event handling is possible. Interfaces are provided to existing Clause 31 entities, functional blocks associated with MPCP, and the MAC Client.

The Control Multiplexer is responsible for forwarding frames from the MAC Control opcode-specific functions and the MAC Client to the MAC. Multiplexing is performed in the transmission direction. Given multiple MA_DATA.request primitives from the MAC Client, and MA_CONTROL.request primitives from the MAC Control Clients, a single TransmitFrame is generated for transmission. At the OLT, multiple MAC instances share the same Multi-point MAC Control, as a result, the transmit block is enabled based on an external control signal housed in Multi-Point Transmission Control for transmission overlap avoidance. At the ONU the Gate Processing functional block interfaces for upstream transmission administration.


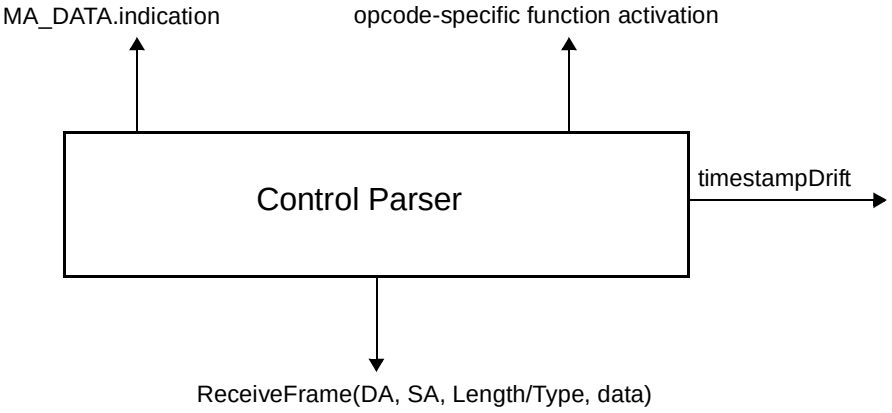


Figure 64–6—Control Parser Service Interfaces

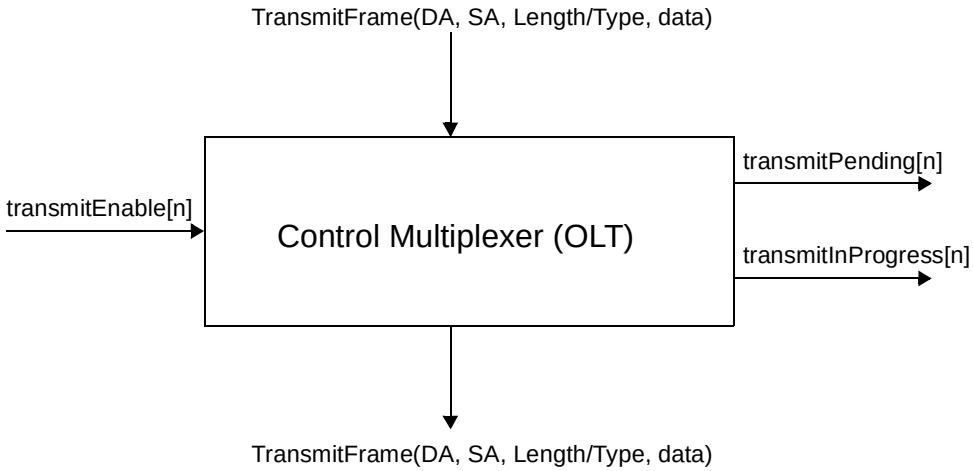


NOTE—TransmitFrame primitive may be issued from multiple MAC Control processing blocks.

Figure 64–7—OLT Control Multiplexer Service Interfaces

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 475 of 717

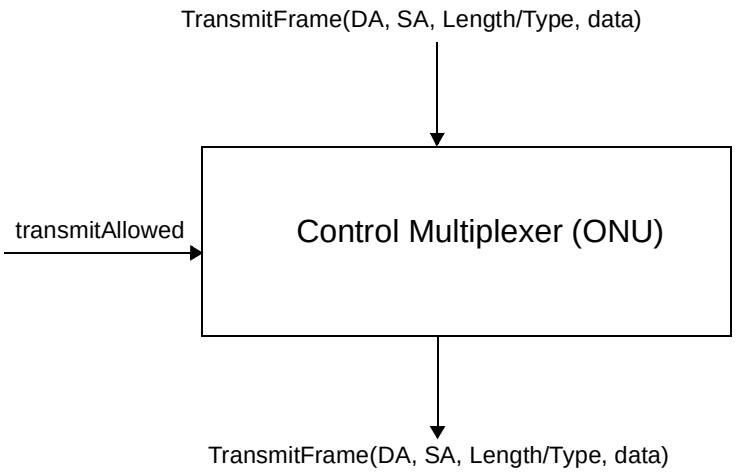

NOTE—TransmitFrame primitive may be issued from multiple MAC Control processing blocks.

Figure 64–8—ONU Control Multiplexer Service Interfaces

64.2.2.1 Constants

defaultOverhead

This constant holds the size of packet transmission overhead. This overhead is measured in units of time quanta.

TYPE: integer
VALUE: 6

guardThresholdOLT

This constant holds the maximal amount of drift allowed for a timestamp received at the OLT. This value is measured in units of time_quantum (16 bit times).

TYPE: integer
VALUE: 8

guardThresholdONU

This constant holds the maximal amount of drift allowed for a timestamp received at the ONU. This value is measured in units of time_quantum (16 bit times)

TYPE: integer
VALUE: 12

MAC_Control_type

The value of the Length/Type field as defined in Clause 31.4.1.3.

TYPE: integer
VALUE: 0x8808

tailGuard

This constant holds the value used to reserve space at the end of the upstream transmission at the ONU in addition to the size of last MAC service data unit (m_sdu) in units of octets. Space is reserved for the MAC overheads including: preamble, SFD, DA, SA, Length/Type, FCS, and the End of Packet Delimiter (EPD). The sizes of the above listed MAC overhead items are described in Clause 3.1.1. The size of the EPD is described in Clause 36.2.4.14.

TYPE: integer
VALUE: 29

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 476 of 717

time_quantum

The unit of time_quantum is used by all mechanisms synchronized to the advancement of the localTime variable. All variables that represent counters and time intervals are defined using time_quantum. Each time_quantum is equal 16ns.

TYPE: integer
VALUE: 16

tqSize

This constant represents time_quantum in octet transmission times.

TYPE: integer
VALUE: 2

64.2.2.2 Counters

localTime

This variable holds the value of the local timer used to control MPCP operation. This variable is advanced by a timer at 62.5MHz, and counts in time_quanta. At the OLT the counter shall track the transmit clock, while at the ONU the counter shall track the receive clock. For accuracy of receive clock see 65.3.1.2. It is reloaded with the received timestamp value (from the OLT) by the Control Parser (see Figure 64–11). Changing the value of this variable while running using Layer Management is highly undesirable and is unspecified.

TYPE: 32 bit unsigned

64.2.2.3 Variables

BEGIN

This variable is used when initiating operation of the functional block state machine. It is set to true following initialization and every reset.

TYPE: boolean

data_rx

This variable represents a 0-based bit array corresponding to the payload of a received MPCPDU. This variable is used to parse incoming MPCPDU frames.

TYPE: bit array

data_tx

This variable represents a 0-based bit array corresponding to the payload of an MPCPDU being transmitted. This variable is used to access payload of outgoing MPCPDU frames, for example to set the timestamp value.

TYPE: bit array

fecEnabled

This variable represents whether the FEC function is enabled. If FEC function is enabled, this variable equals true, otherwise it equals false.

TYPE: boolean

newRTT

This variable temporary holds a newly-measured Round Trip Time to the ONU. The new RTT value is represented in units of time_quanta.

TYPE: 16 bit unsigned

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 477 of 717

nextTxTime

This variable represents a total transmission time of next packet and is used to check whether the next packet fits in the remainder of ONU's transmission window. The value of nextTxTime includes packet transmission time, tailGuard defined in 64.2.2.1, and FEC parity data overhead, if FEC is enabled. This variable is measured in units of time quanta.

TYPE: 16 bit unsigned

opcode_rx

This variable holds an opcode of the last received MPCPDU.

TYPE: 16 bit unsigned

opcode_tx

This variable holds an opcode of an outgoing MPCPDU.

TYPE: 16 bit unsigned

packet_initiate_delay

This variable is used to set the time-out interval for packet_initiate_timer defined in 64.2.2.5. The packet_initiate_delay value is represented in units of time_quanta.

TYPE: 16 bit unsigned

RTT

This variable holds the measured Round Trip Time to the ONU. The RTT value is represented in units of time_quanta.

TYPE: 16 bit unsigned

stopTime

This variable holds the value of the localTime counter corresponding to the end of the nearest grant. This value is set by the Gate Processing function as described in 64.3.5.

TYPE: 32 bit unsigned

timestamp

This variable holds the value of timestamp of the last received MPCPDU frame.

TYPE: 32 bit unsigned

timestampDrift

This variable is used to indicate whether an error is signaled as a result of uncorrectable timestamp drift.

TYPE: boolean

transmitAllowed

This variable is used to control PDU transmission at the ONU. It is set to true when the transmit path is enabled, and is set to false when the transmit path is being shut down. transmitAllowed changes its value according to the state of the Gate Processing functional block.

TYPE: boolean

transmitEnable[j]

These variables are used to control the transmit path in a Multi-point MAC Control instance at the OLT. Setting them to on indicates that the selected instance is permitted to transmit a frame. Setting it to off inhibits the transmission of frames in the selected instance. Only one of transmitEnable[j] should be set to on at a time.

TYPE: boolean

transmitInProgress[j]

This variable indicates that the Multi-point MAC Control instance *j* is in a process of transmitting a frame.

TYPE: boolean

transmitPending[j]

This variable indicates that the Multi-point MAC Control instance *j* is ready to transmit a frame.

TYPE: boolean

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 479 of 717

64.2.2.4 Functions

abs(n)
This function returns the absolute value of the parameter n.

Opcode-specific function(opcode)
Functions exported from opcode specific blocks that are invoked on the arrival of a MAC Control message of the appropriate opcode.

FEC_Overhead(length)
This function calculates the size of additional overhead to be added by the FEC encoder while encoding a frame of size length. Parameter length represents the size of an entire frame including preamble, SFD, DA, SA, Length/Type, and FCS. As specified in 65.2.3, FEC encoder adds 16 parity octets for each block of 239 data octets. Additionally, 26 code-groups are required to accommodate IPG and longer start-of-frame and end-of-frame sequences, which are used to allow reliable packet boundary detection in presence of high bit error ratio. The function returns the value of FEC overhead in units of time quanta. The following formula is used to calculate the overhead:

$$FEC\_Overhead = 13 + \left\lceil \frac{length}{239} \right\rceil \times 8$$

NOTE–The notation $\lceil x \rceil$ represents a *ceiling* function, which returns the value of its argument x rounded up to the nearest integer.

ReceiveFrame(DA, SA, Length/Type, data)
The MAC Sublayer function that is called to receive a frame with the specified parameters.

select
This function selects the next Multi-point MAC Control instance allowed to initiate transmission of a frame. The function returns an index to the transmitPending array for which the value is not false. The selection criteria in the presence of multiple active elements in the list is implementation dependent.

SelectFrame()
This function enables the interface, which has a pending frame. If multiple interfaces have frames waiting at the same time, only one interface will be enabled. The selection criteria is not specified, except for the case when some of the pending frames have Length/Type = MAC_Control. In this case, one of the interfaces with a pending MAC Control frame shall be enabled.

sizeof(sdu)
This function returns the size of the sdu in octets.

transmissionPending()
This function returns true if any of the Multi-point MAC Control instances has a frame waiting to be transmitted. The function can be represented as

```
transmissionPending() =   transmitPending[0] +
                          transmitPending[1] +
                          ... +
                          transmitPending[n-1]
```

where n is the total number of Multi-point MAC Control instances.

TransmitFrame(DA, SA, Length/Type, data)
The MAC Sublayer function that is called to transmit a frame with the specified parameters.

Copyright © 2004 IEEE. All rights reserved.

64.2.2.5 Timers

packet_initiate_timer
: This timer is used to delay frame transmission from MAC Control to avoid variable MAC delay while MAC enforces IPG after a previous frame. In addition, when FEC is enabled, this timer increases interframe spacing just enough to accommodate the extra parity data to be added by the FEC encoder.

64.2.2.6 Messages

MA_DATA.indication(DA, SA, m_sdu, receiveStatus)
: The service primitive is defined in 2.3.2.

64.2.2.7 State Diagrams

The Multi-point transmission control function in the OLT shall implement state diagram shown in Figure 64–9. Control parser function in the OLT shall implement state diagram shown in Figure 64–10. Control parser function in the ONU shall implement state diagram shown in Figure 64–11. Control multiplexer function in the OLT shall implement state diagram shown in Figure 64–12. Control multiplexer function in the ONU shall implement state diagram shown in Figure 64–13.


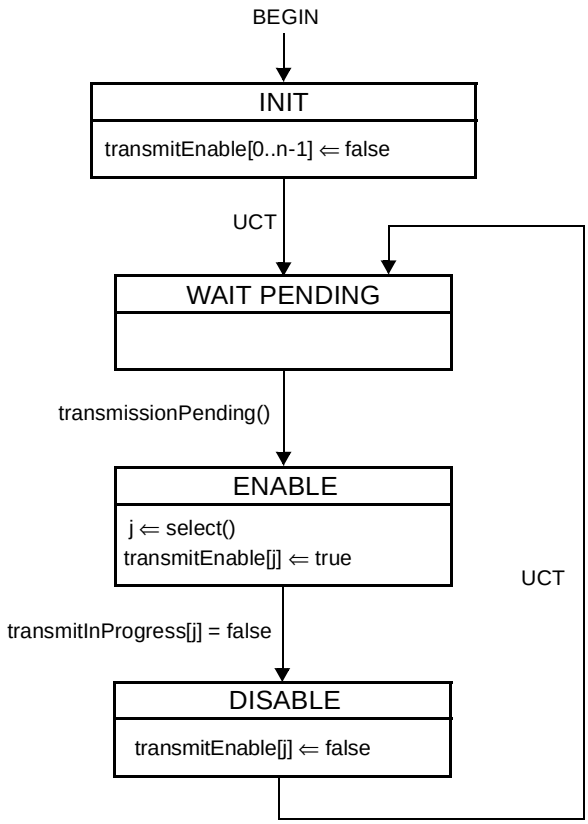


Figure 64–9—OLT Multi-Point Transmission Control state diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 480 of 717

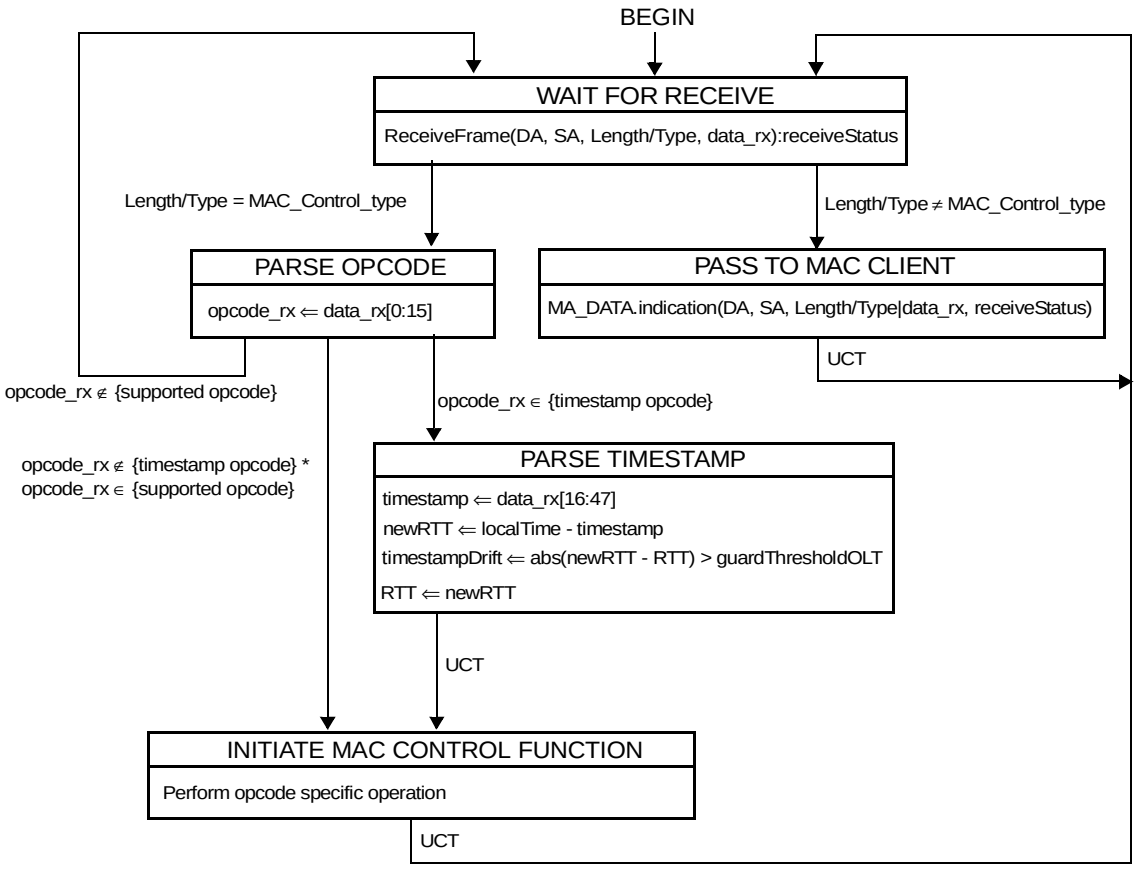


NOTE–The opcode-specific operation is launched as a parallel process by the MAC Control sublayer, and not as a synchronous function. Progress of the generic MAC Control Receive state machine (as shown in this figure) is not implicitly impeded by the launching of the opcode specific function.

Refer to Annex 31A for list of supported opcodes and timestamp opcodes.

Figure 64–10—OLT Control Parser state diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 481 of 717

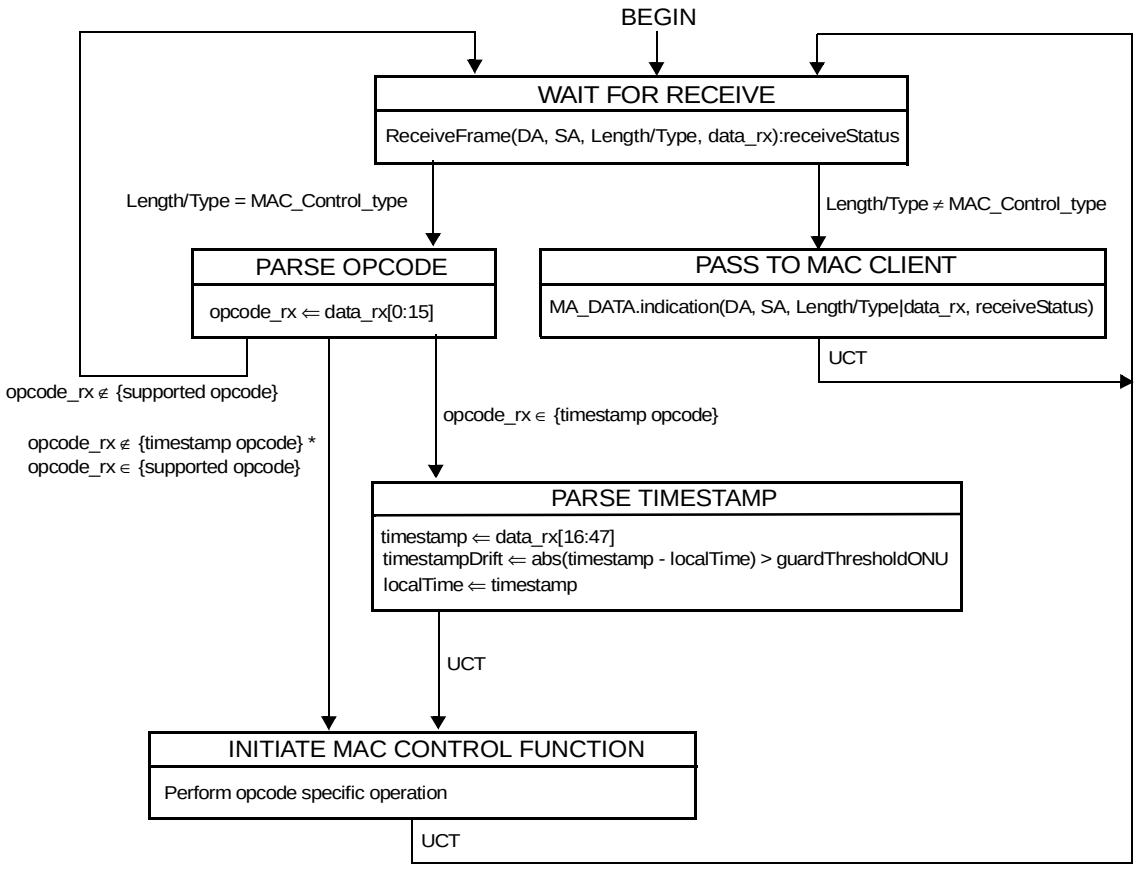

NOTE– The opcode-specific operation is launched as a parallel process by the MAC Control sublayer, and not as a synchronous function. Progress of the generic MAC Control Receive state machine (as shown in this figure) is not implicitly impeded by the launching of the opcode specific function.

Refer to Annex 31A for list of supported opcodes and timestamp opcodes.

Figure 64–11—ONU Control Parser state diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 482 of 717

DirecTV Exhibit 1010, Page 483 of 717

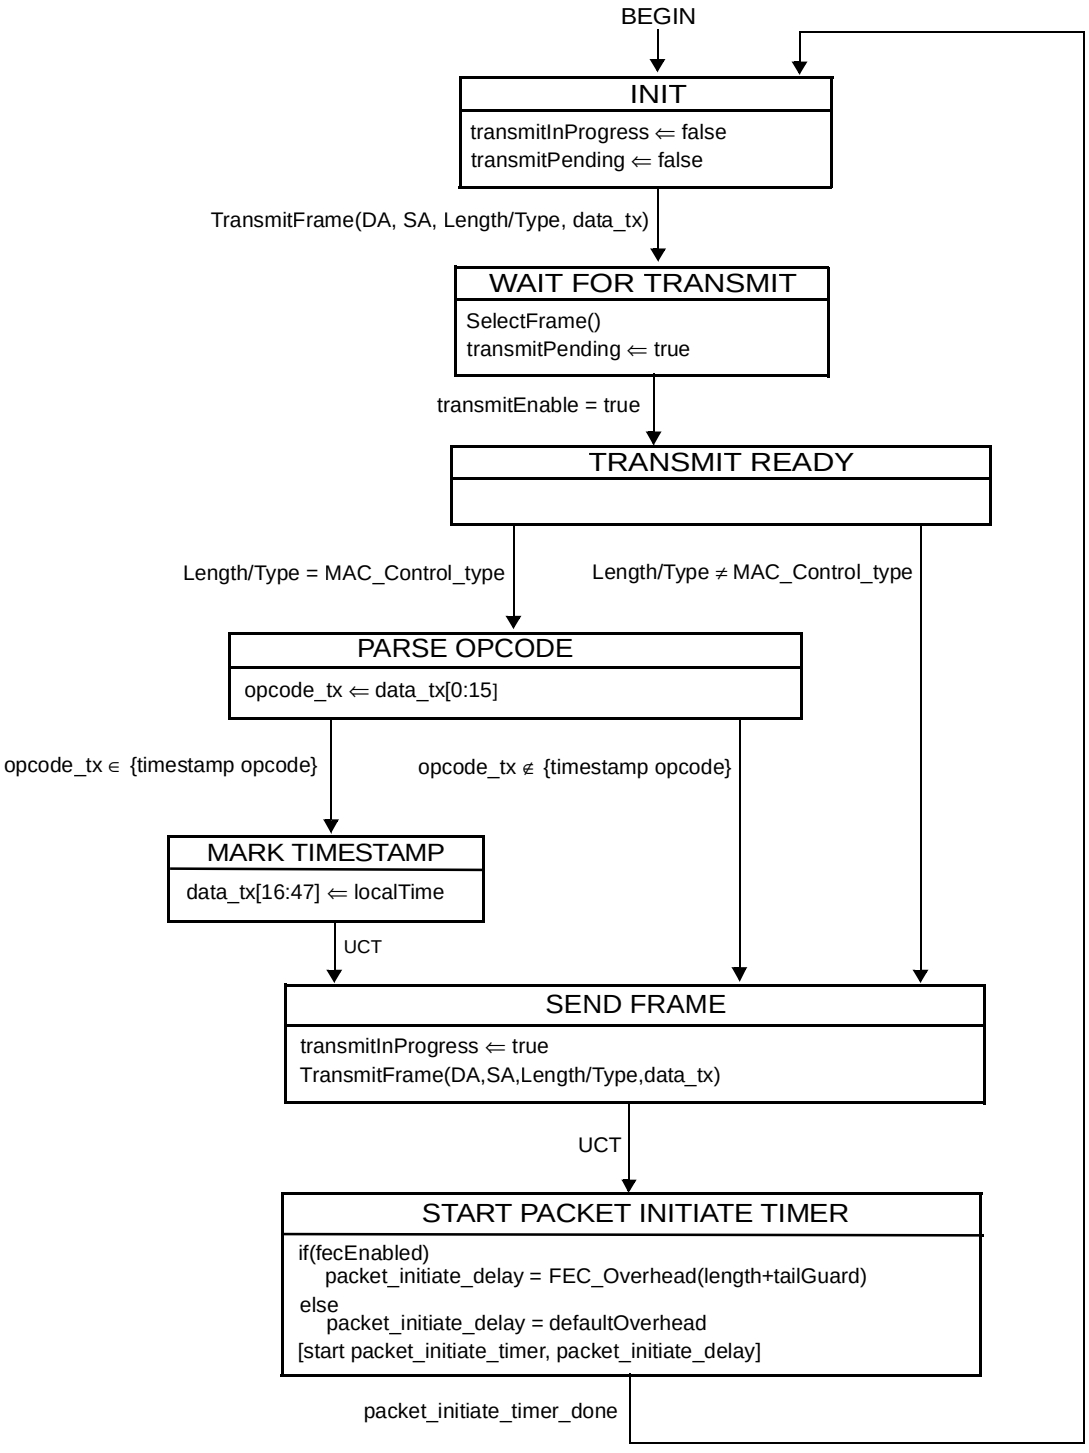


Figure 64–12—OLT Control Multiplexer state diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 484 of 717

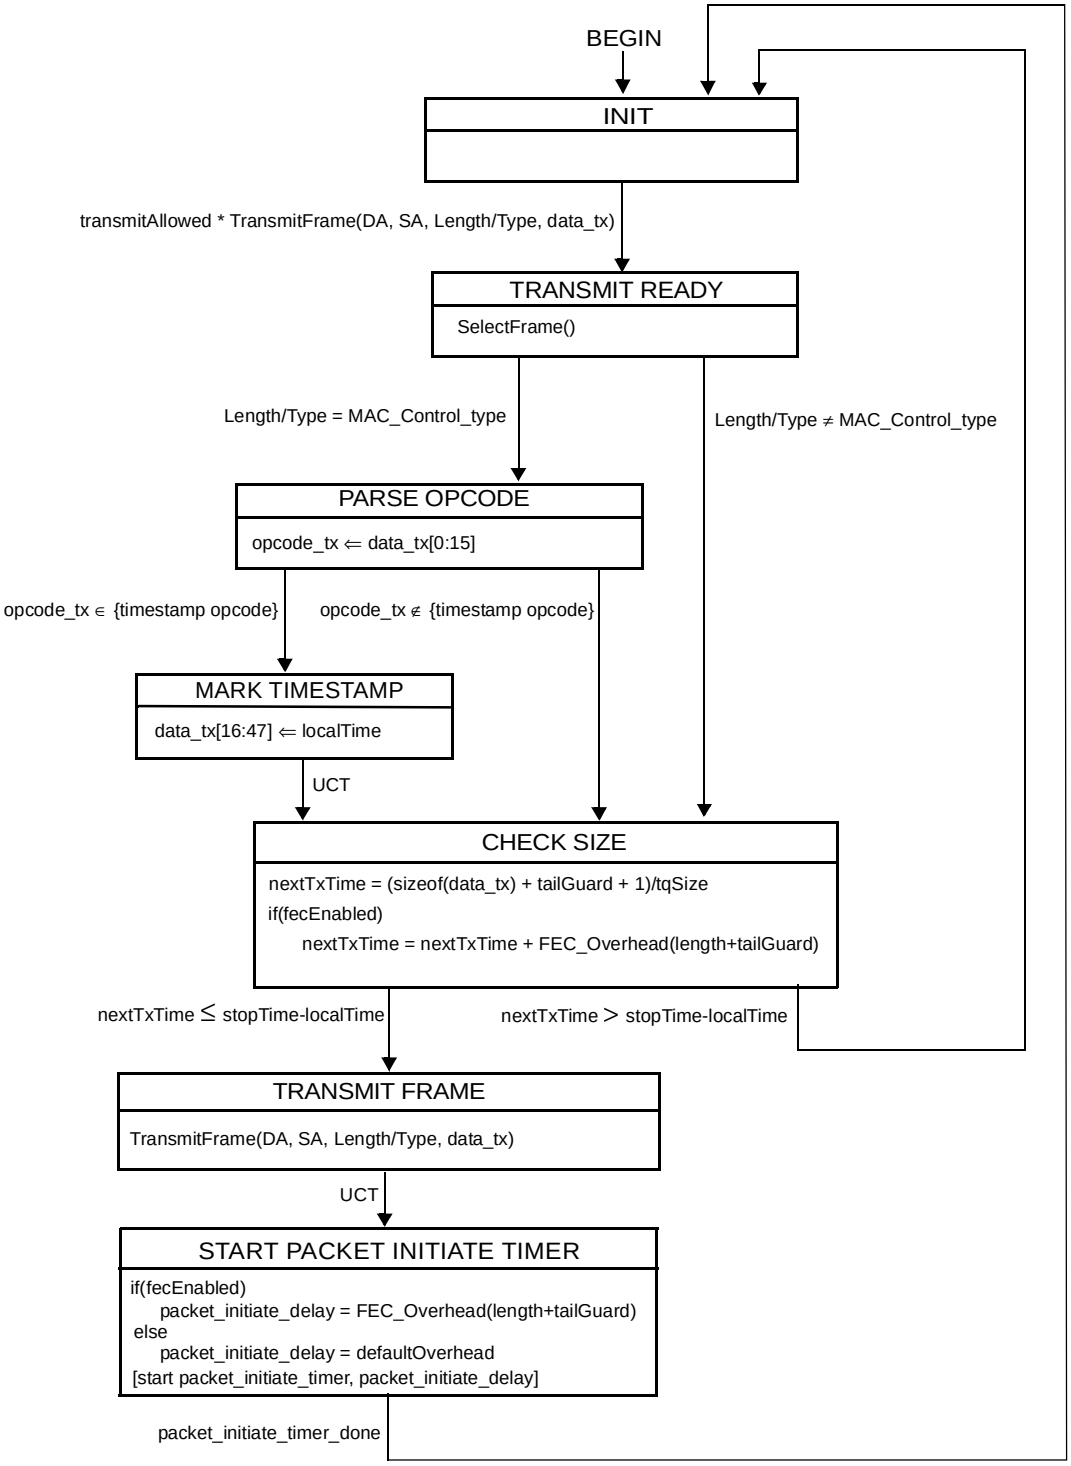


Figure 64–13—ONU Control Multiplexer state diagram

Copyright © 2004 IEEE. All rights reserved.

64.3 Multi-Point Control Protocol (MPCP)

As depicted in Figure 64–3, the Multi-point MAC Control functional block comprises the following functions:

a) *Discovery Processing*. This block manages the discovery process, through which an ONU is discovered and registered with the network while compensating for RTT.
b) *Report Processing*. This block manages the generation and collection of report messages, through which bandwidth requirements are sent upstream from the ONU to the OLT.
c) *Gate Processing*. This block manages the generation and collection of gate messages, through which multiplexing of multiple transmitters is achieved.

As depicted in Figure 64–3, the layered system may instantiate multiple MAC entities, using a single physical layer. Each instantiated MAC communicates with an instance of the opcode specific functional blocks through the Multi-point MAC Control. In addition some global variables are shared across the multiple instances. Common state control is used to synchronize the multiple MACs using MPCP procedures. Operation of the common state control is generally considered outside the scope of this document.

64.3.1 Principles of Multi-Point Control Protocol

Multi-point MAC Control enables a MAC Client to participate in a point-to-multi-point optical network by allowing it to transmit and receive frames as if it was connected to a dedicated link. In doing so, it employs the following principles and concepts:

a) A MAC client transmits and receives frames through the Multi-point MAC Control sublayer.
b) The Multi-point MAC Control decides when to allow a frame to be transmitted using the client interface Control Multiplexer.
c) Given a transmission opportunity, the MAC Control may generate control frames that would be transmitted in advance of the MAC Client's frames, utilizing the inherent ability to provide higher priority transmission of MAC Control frames over MAC Client frames.
d) Multiple MACs operate on a shared medium by allowing only a single MAC to transmit upstream at any given time across the network using a time-division multiple access (TDMA) method.
e) Such gating of transmission is orchestrated through the Gate Processing function.
f) New devices are discovered in the network and allowed transmission through the Discovery Processing function.
g) Fine control of the network bandwidth distribution can be achieved using feedback mechanisms supported in the Report Processing function.
h) The operation of P2MP network is asymmetrical, with the OLT assuming the role of master, and the ONU assuming the role of slave.

64.3.2 Compatibility considerations

64.3.2.1 PAUSE operation

Even though MPCP is compatible with flow control, optional use of flow control may not be efficient in the case of large propagation delay. If flow control is implemented, then the timing constraints in Clause 31B supplement the constraints found at 64.3.2.4.

NOTE—MAC at an ONU can receive frames from unicast channel and single-copy-broadcast (SCB) channel. If the SCB channel is used to broadcast data frames to multiple ONUs, the ONU's MAC may continue receiving data frames from SCB channel even after the ONU has issued a PAUSE request to its unicast remote-end.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 485 of 717

64.3.2.2 Optional Shared LAN Emulation

By combining P2PE, suitable filtering rules at the ONU, and suitable filtering and forwarding rules at the OLT, it is possible to emulate an efficient shared LAN. Support for shared LAN emulation is optional, and requires an additional layer above the MAC, which is out of scope for this document. Thus, shared LAN emulation is introduced here for informational purposes only.

Specific behaviour of the filtering layer at the RS is specified in 65.1.3.3.2.

64.3.2.3 Multicast and single copy broadcast support

In the downstream direction, the PON is a broadcast medium. In order to make use of this capability for forwarding broadcast frames from the OLT to multiple recipients without multiple duplication for each ONU, the single-copy broadcast (SCB) support is introduced.

The OLT has at least one MAC associated with every ONU. In addition one more MAC at the OLT is marked as the SCB MAC. The SCB MAC handles all downstream broadcast traffic, but is never used in the upstream direction for client traffic, except for client registration. Optional higher layers may be implemented to perform selective broadcast of frames. Such layers may require additional MACs (multicast MACs) to be instantiated in the OLT for some or all ONUs increasing the total number of MACs beyond the number of ONUs + 1.

When connecting the SCB MAC to an 802.1D bridge port it is possible that loops may be formed due to the broadcast nature. Thus it is recommended that this MAC not be connected to an 802.1D bridge port.

SCB channel configuration as well as filtering and marking of frames for support of SCB is defined in 65.1.3.3.2.

64.3.2.4 Delay requirements

The MPCP protocol relies on strict timing based on distribution of timestamps. A compliant implementation needs to guarantee a constant delay through the MAC and PHY in order to maintain the correctness of the timestamping mechanism. The actual delay is implementation dependent, however, a complying implementation shall maintain a delay variation of no more than 16 bit times through the implemented MAC stack.

The OLT shall not grant less than 1024 time_quanta into the future, in order to allow the ONU processing time when it receives a gate message. The ONU shall process all messages in less than this period. The OLT shall not issue more than one message every 1024 time_quanta to a single ONU. The unit of time_quantum is defined as 16 ns.

64.3.3 Discovery Processing

Discovery is the process whereby newly connected or off-line ONUs are provided access to the PON. The process is driven by the OLT, which periodically makes available Discovery Time Windows during which off-line ONU's are given the opportunity to make themselves known to the OLT. The periodicity of these windows is unspecified and left up to the implementer. The OLT signifies that a discovery period is occurring by broadcasting a discovery gate message, which includes the starting time and length of the discovery window. Off-line ONUs, upon receiving this message, wait for the period to begin and then transmit a REGISTER_REQ message to the OLT. Discovery windows are unique in that they are the only times where multiple ONUs can access the PON simultaneously, and transmission overlap can occur. In order to reduce transmission overlaps, a contention algorithm is used by all ONUs. Measures are taken to reduce the probability for overlaps by artificially simulating a random distribution of distances from the OLT. Each ONU shall wait a random amount of time before transmitting the REGISTER_REQ message that

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 486 of 717


is shorter than the length of the discovery time window. It should be noted that multiple valid REGISTER_REQ messages can be received by the OLT during a single discovery time period. Included in the REGISTER_REQ message is the ONU's MAC address and number of maximum pending grants. Upon receipt of a valid REGISTER_REQ message, the OLT registers the ONU, allocating and assigning new port identities (LLIDs), and bonding corresponding MACs to the LLIDs.

The next step in the process is for the OLT to transmit a Register message to the newly discovered ONU, which contains the ONU's LLID, and the OLT's required synchronization time. Also, the OLT echoes the maximum number of pending grants. The OLT now has enough information to schedule the ONU for access to the PON and transmits a standard GATE message allowing the ONU to transmit a REGISTER_ACK. Upon receipt of the REGISTER_ACK, the discovery process for that ONU is complete, the ONU is registered and normal message traffic can begin. It is the responsibility of Layer Management to perform the MAC bonding, and start transmission from/to the newly registered ONU. The discovery message exchange is illustrated in Figure 64–14.

There may exist situations when the OLT requires that an ONU go through the discovery sequence again and reregister. Similarly, there may be situations where an ONU needs to inform the OLT of its desire to deregister. The ONU can then reregister by going through the discovery sequence. For the OLT, the REGISTER message may indicate a value, Reregister or Deregister, that if either is specified will force the receiving ONU into reregistering. For the ONU, the REGISTER_REQ message contains the Deregister bit that signifies to the OLT that this ONU should be deregistered.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 487 of 717

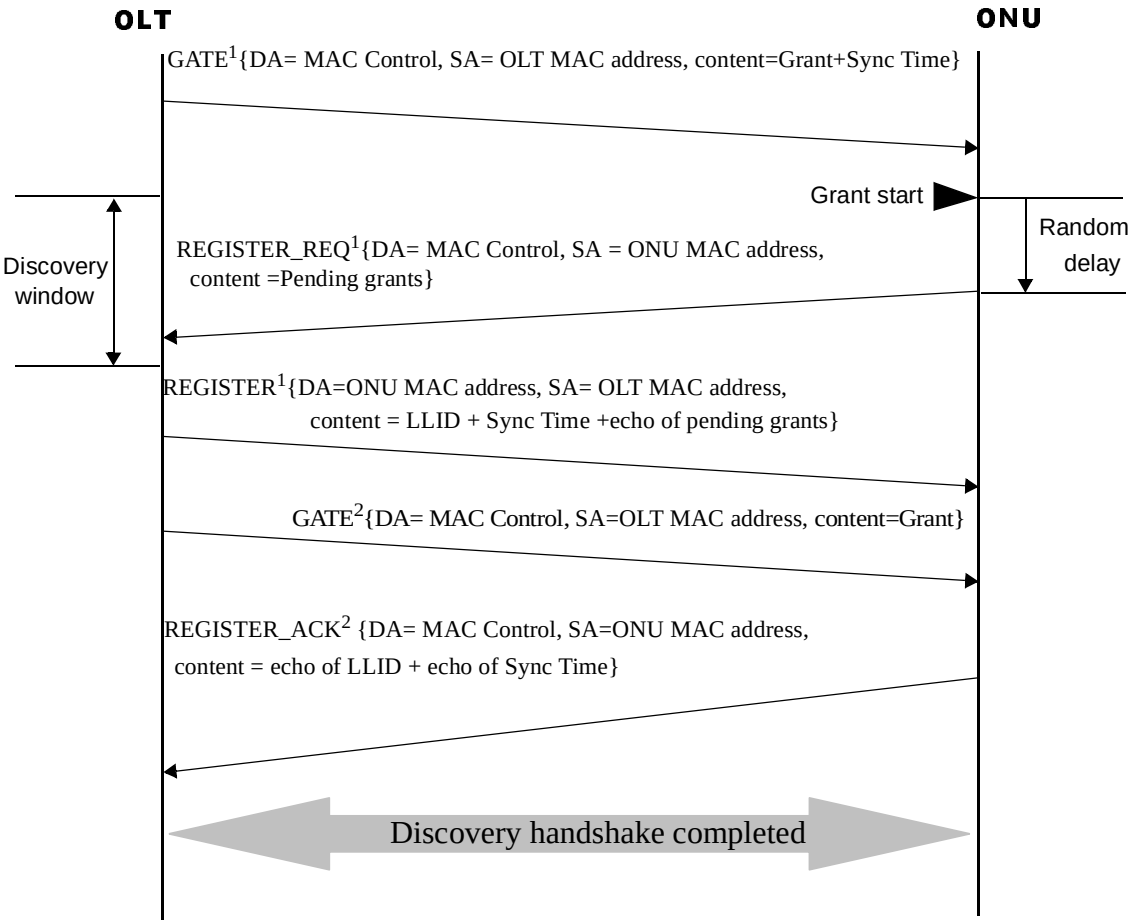

[1] Messages sent on broadcast channel
[2] Messages sent on unicast channels

Figure 64–14—Discovery Handshake Message Exchange

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 488 of 717

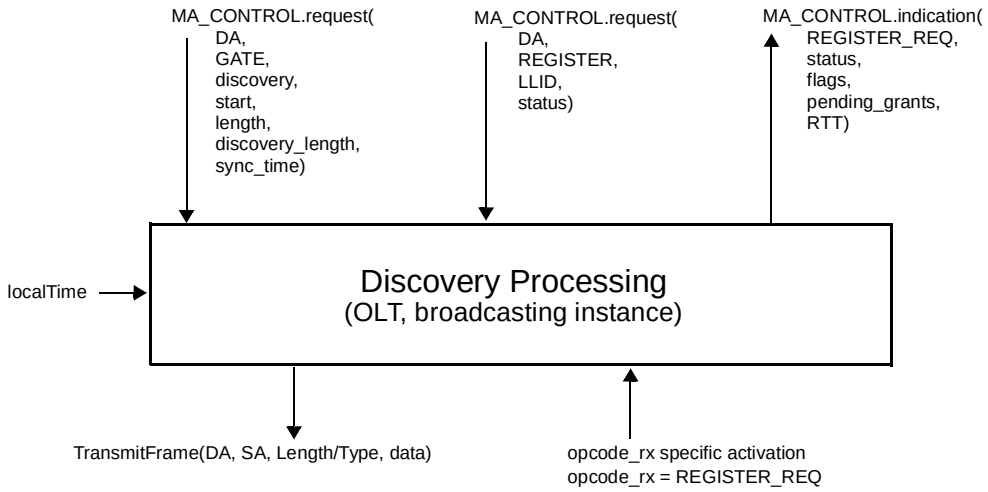


Figure 64–15—Discovery Processing Service Interfaces (OLT, broadcasting instance)

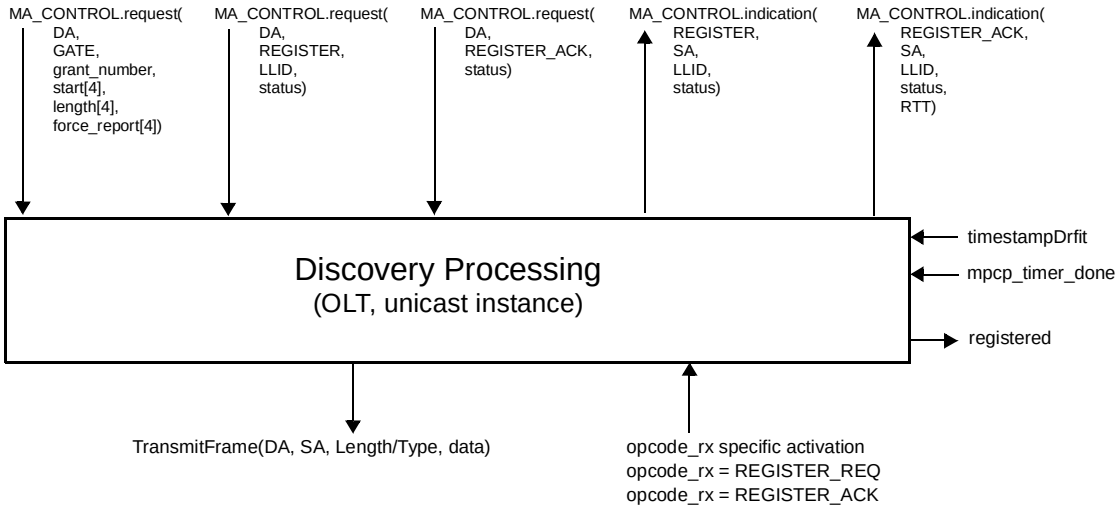


Figure 64–16—Discovery Processing Service Interfaces (OLT, unicasting instance)

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 489 of 717

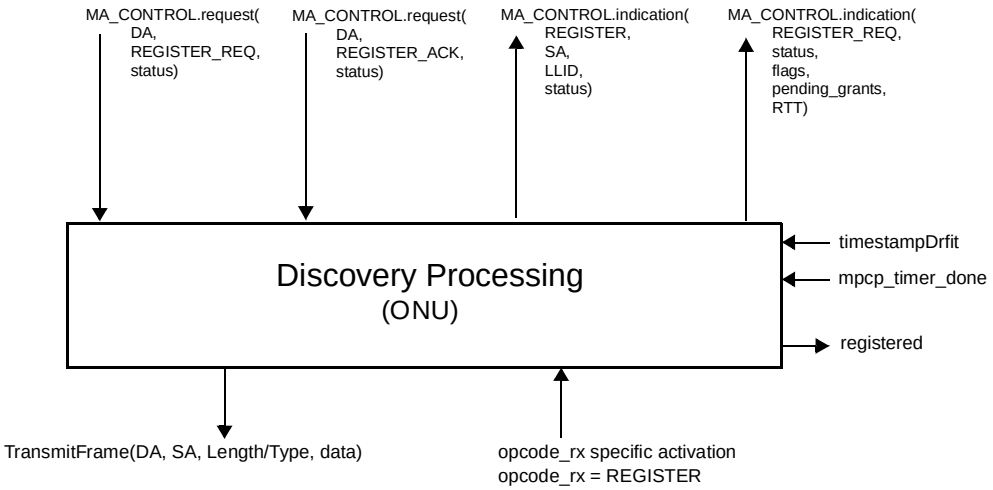


Figure 64–17—Discovery Processing Service Interfaces (ONU)

64.3.3.1 Constants

No constants defined.

64.3.3.2 Variables

BEGIN
: This variable is defined in 64.2.2.3.

data_rx
: This variable is defined in 64.2.2.3.

data_tx
: This variable is defined in 64.2.2.3.

grantEndTime
: This variable holds the time at which the OLT expects the ONU grant to complete. Failure of a REGISTER_ACK message from an ONU to arrive at the OLT before grantEndTime is a fatal error in the discovery process, and causes registration to fail for the specified ONU, who may then retry to register. The value of grantEndTime is measured in units of time_quantum.
  TYPE: 32-bit unsigned

insideDiscoveryWindow
: This variable holds the current status of the discovery window. It is set to true when the discovery window opens, and is set to false when the discovery window closes.
  TYPE: boolean

localTime
: This variable is defined in 64.2.2.2.

opcode_rx
: This variable is defined in 64.2.2.3.

opcode_tx
: This variable is defined in 64.2.2.3.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 490 of 717

pendingGrants
This variable holds the maximum number of pending grants that an ONU is able to queue.
TYPE: 16 bit unsigned

registered
This variable holds the current result of the Discovery Process. It is set to true once the discovery process is complete and registration is acknowledged.
TYPE: boolean

syncTime
This variable holds the time required to stabilize the receiver at the OLT. It counts time_quanta units from the point where transmission output is stable to the point where synchronization has been achieved. The value of syncTime includes laser on time (T_{on}), gain adjustment interval ($T_{receiver\_settling}$), clock synchronization interval (T_{cdr}), and code-group alignment interval ($T_{code\_group\_align}$), as specified in 60.7.13.2. The OLT conveys the value of syncTime to ONUs in Discovery GATE and REGISTER messages. During the synchronization time only IDLE patterns can be transmitted by an ONU.
TYPE: 16 bit unsigned

timestampDrift
This variable is defined in 64.2.2.3.

64.3.3.3 Functions

ReceiveFrame(DA, SA, Length/Type, data)
This function is defined in 64.2.2.4.

TransmitFrame(DA, SA, Length/Type, data)
This function is defined in 64.2.2.4.

64.3.3.4 Timers

discovery_window_size_timer
This timer is used to wait for the event signalling the end of the discovery window.
VALUE: The timer value is set dynamically based on the parameters received in a DISCOVERY GATE message.

mpcp_timer
This timer is used to measure the arrival rate of MPCP frames in the link. Failure to receive frames is considered a fatal fault and leads to deregistration.

64.3.3.5 Messages

MA_CONTROL.request(DA, GATE, discovery, start, length, discovery_length, sync_time)
The service primitive used by the MAC Control client at the OLT to initiate the Discovery Process. This primitive takes the following parameters:

DA:	multicast or unicast MAC address.
GATE:	opcode for GATE MPCPDU as defined in Table 31A–1.
discovery:	flag specifying that the given GATE message is to be used for discovery only.
start:	start time of the discovery window.
length:	length of the grant given for discovery.
discovery_length:	length of the discovery window process.
sync_time:	the time interval required to stabilize the receiver at the OLT.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 491 of 717

MA_CONTROL.request(DA, GATE, grant_number, start[4], length[4], force_report[4])

This service primitive is used by the MAC Control client at the OLT to issue the GATE message to an ONU. This primitive takes the following parameters:

DA:	unicast MAC address.
GATE:	opcode for GATE MPCPDU as defined in Table 31A–1.
grant_number:	number of grants issued with this GATE message. The number of grants ranges from 0 to 4.
start[4]:	start times of the individual grants. Only the first grant_number elements of the array are used.
length[4]:	lengths of the individual grants. Only the first grant_number elements of the array are used.
force_report[4]:	flags indicating whether a REPORT message should be generated in the corresponding grant. Only the first grant_number elements of the array are used.

MA_CONTROL.request(DA, REGISTER_REQ, status)

The service primitive used by a client at the ONU to request the Discovery Process to perform a registration. This primitive takes the following parameters:

DA:	multicast MAC Control address as defined in Annex 31B.
REGISTER_REQ:	opcode for REGISTER_REQ MPCPDU as defined in Table 31A–1.
status:	This parameter takes on the indication supplied by the flags field in the REGISTER_REQ MPCPDU as defined in Table 64–3.

MA_CONTROL.indication(REGISTER_REQ, status, flags, pending_grants, RTT)

The service primitive issued by the Discovery Process to notify the client and Layer Management that the registration process is in progress. This primitive takes the following parameters:

REGISTER_REQ:	opcode for REGISTER_REQ MPCPDU as defined in Table 31A–1.
status:	This parameter holds the values incoming or retry. Value incoming is used at the OLT to signal that a REGISTER_REQ message was received successfully. The value retry is used at the ONU to signal to the client that a registration attempt failed and will be repeated.
flags:	This parameter holds the contents of the flags field in the REGISTER_REQ message. This parameter holds a valid value only when the primitive is generated by the Discovery Process is in the OLT.
pending_grants:	This parameters holds the contents of the pending_grants field in the REGISTER_REQ message. This parameter holds a valid value only when the primitive is generated by the Discovery Process in the OLT.
RTT:	The measured round trip time to/from the ONU is returned in this parameter. RTT is stated in time_quanta units. This parameter holds a valid value only when the primitive is generated by the Discovery Process in the OLT.

MA_CONTROL.request(DA, REGISTER, LLID, status, pending_grants)

The service primitive used by the MAC Control client at the OLT to initiate acceptance of an ONU. This primitive takes the following parameters:

DA:	multicast MAC Control address as defined in Annex 31B.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 492 of 717

REGISTER: opcode for REGISTER MPCPDU as defined in Table 31A–1.
LLID: This parameter holds the logical link identification number assigned by the MAC Control client.
status: This parameter takes on the indication supplied by the flags field in the REGISTER MPCPDU as defined in Table 64–4.
pending_grants: This parameters echoes back the pending_grants field that was previously received in the REGISTER_REQ message.

MA_CONTROL.indication(REGISTER, SA, LLID, status)

This service primitive is issued by the Discovery Process at the OLT or an ONU to notify the MAC Control client and Layer Management of the result of the change in registration status. This primitive takes the following parameters:

REGISTER: opcode for REGISTER MPCPDU as defined in Table 31A–1.
SA This parameter represents is the MAC address of the OLT.
LLID This parameter holds the logical link identification number assigned by the MAC Control client.
status This parameter holds the value of accepted/denied/deregistered/reregistered.

MA_CONTROL.request(DA, REGISTER_ACK, status)

This service primitive is issued by the MAC Control clients at the ONU and the OLT to acknowledge the registration. This primitive takes the following parameters:

DA: multicast MAC Control address as defined in Annex 31B.
REGISTER_ACK: opcode for REGISTER_ACK MPCPDU as defined in Table 31A–1.
status: This parameter takes on the indication supplied by the flags field in the REGISTER MPCPDU as defined in Table 64–5.

MA_CONTROL.indication(REGISTER_ACK, SA, LLID, status, RTT)

This service primitive is issued by the Discovery Process at the OLT to notify the client and Layer Management that the registration process has completed. This primitive takes the following parameters:

REGISTER_ACK: opcode for REGISTER_ACK MPCPDU as defined in Table 31A–1.
SA This parameter represents the MAC address of the reciprocating device (ONU address at the OLT, and OLT address at the ONU).
LLID This parameter holds the logical link identification number assigned by the MAC Control client.
status This parameter holds the value of accepted/denied/reset/deregistered.
RTT The measured round trip time to/from the ONU is returned in this parameter. RTT is stated in time_quanta units. This parameter holds a valid value only when the invoking Discovery Process is in the OLT

Opcode-specific function(opcode)

Functions exported from opcode specific blocks that are invoked on the arrival of a MAC Control message of the appropriate opcode.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 493 of 717

64.3.3.6 State Diagram

Discovery process in the OLT shall implement the discovery window setup state diagram shown in Figure 64–18, request processing state diagram as shown in Figure 64–19, register processing state diagram as shown in Figure 64–20, and final registration state diagram as shown in Figure 64–21. The discovery process in the ONU shall implement registration state diagram as shown in Figure 64–22.

Instantiation of state machines as described in Figure 64–18, Figure 64–19, and Figure 64–20 is performed only at the Multi-point MAC Control instance attached to the broadcast LLID. Instantiation of state machines as described in Figure 64–21 and Figure 64–22 is performed for every Multi-point MAC Control instance, except the instance attached to the broadcast channel.

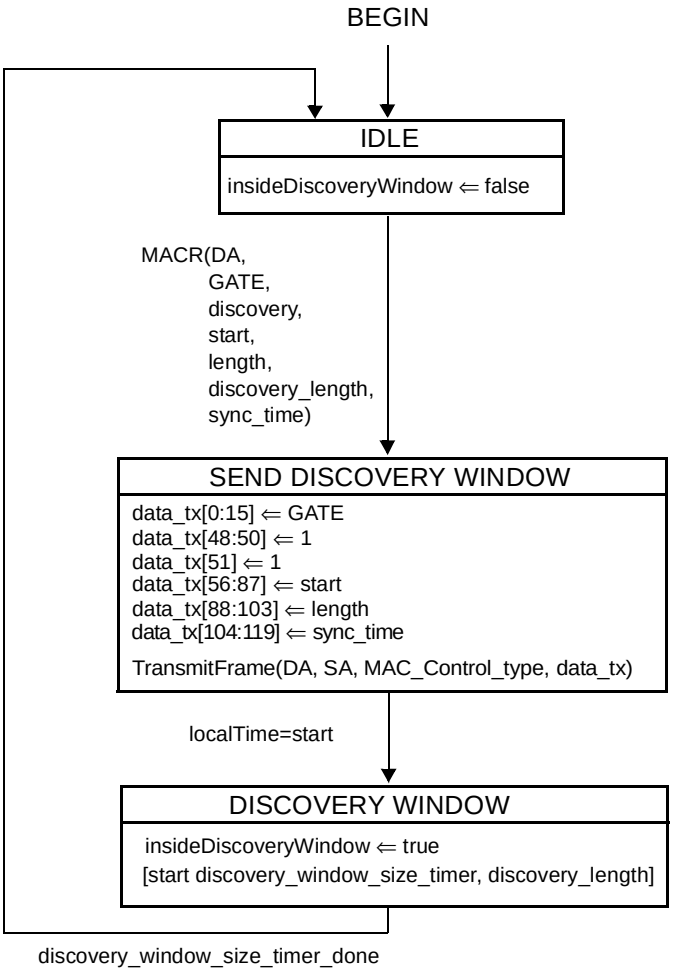


Figure 64–18—Discovery Processing OLT Window Setup State Diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 494 of 717

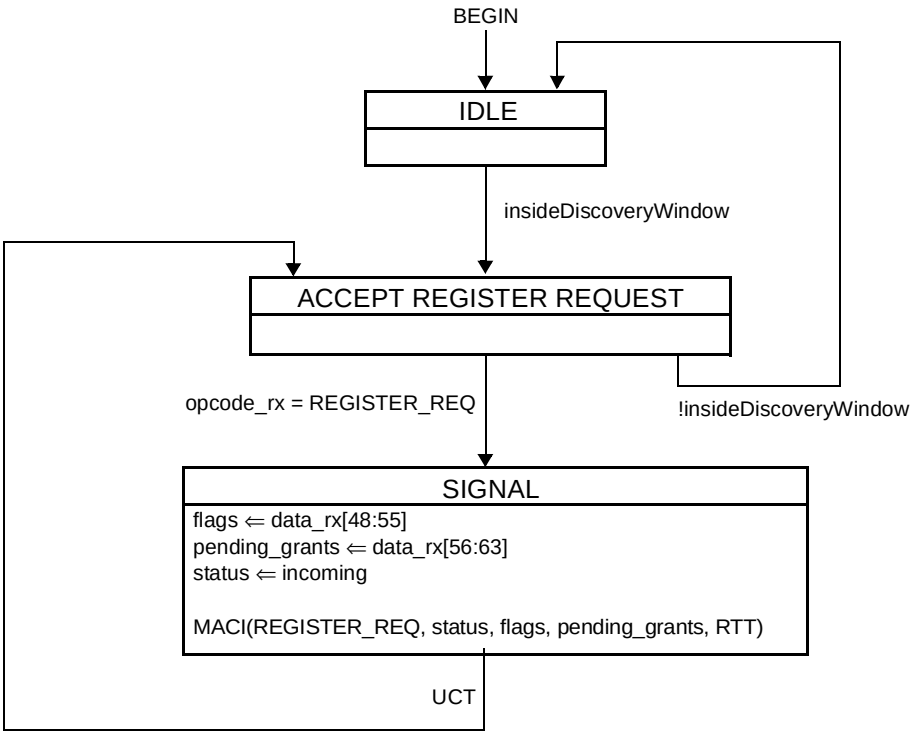


Figure 64–19—Discovery Processing OLT Process Requests State Diagram


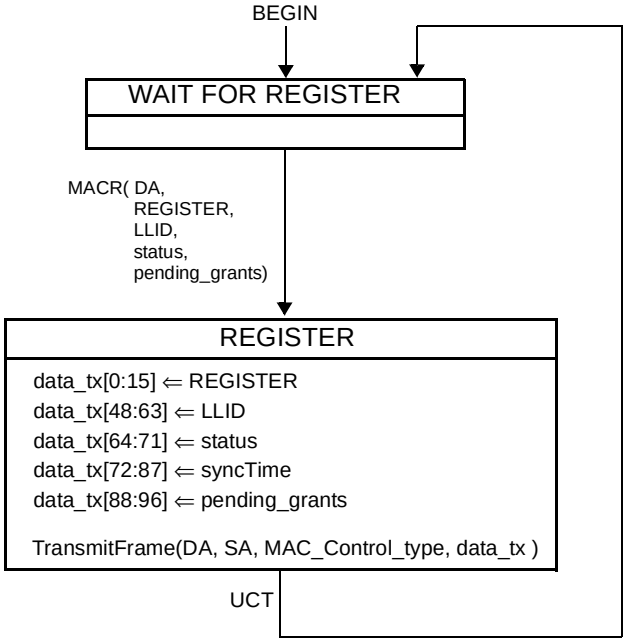


Figure 64–20—Discovery Processing OLT Register State Diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 495 of 717

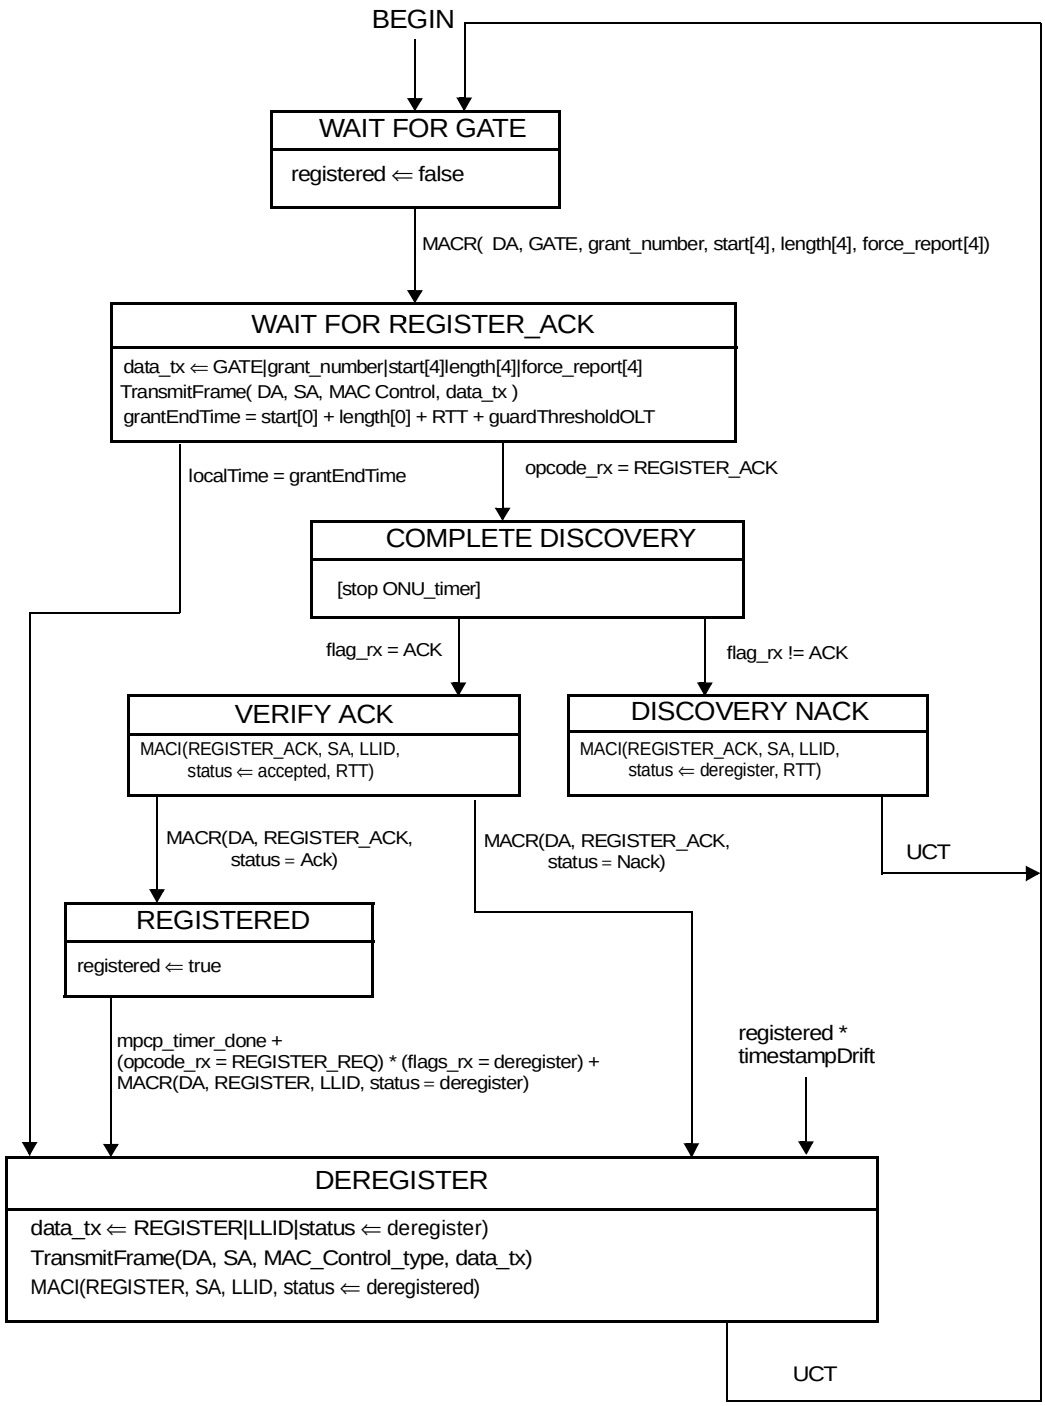

NOTE— The MAC Control Client issues the grant following the REGISTER message, taking the ONU processing delay of REGISTER message into consideration.

Figure 64–21—Discovery Processing OLT Final Registration State Diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 496 of 717

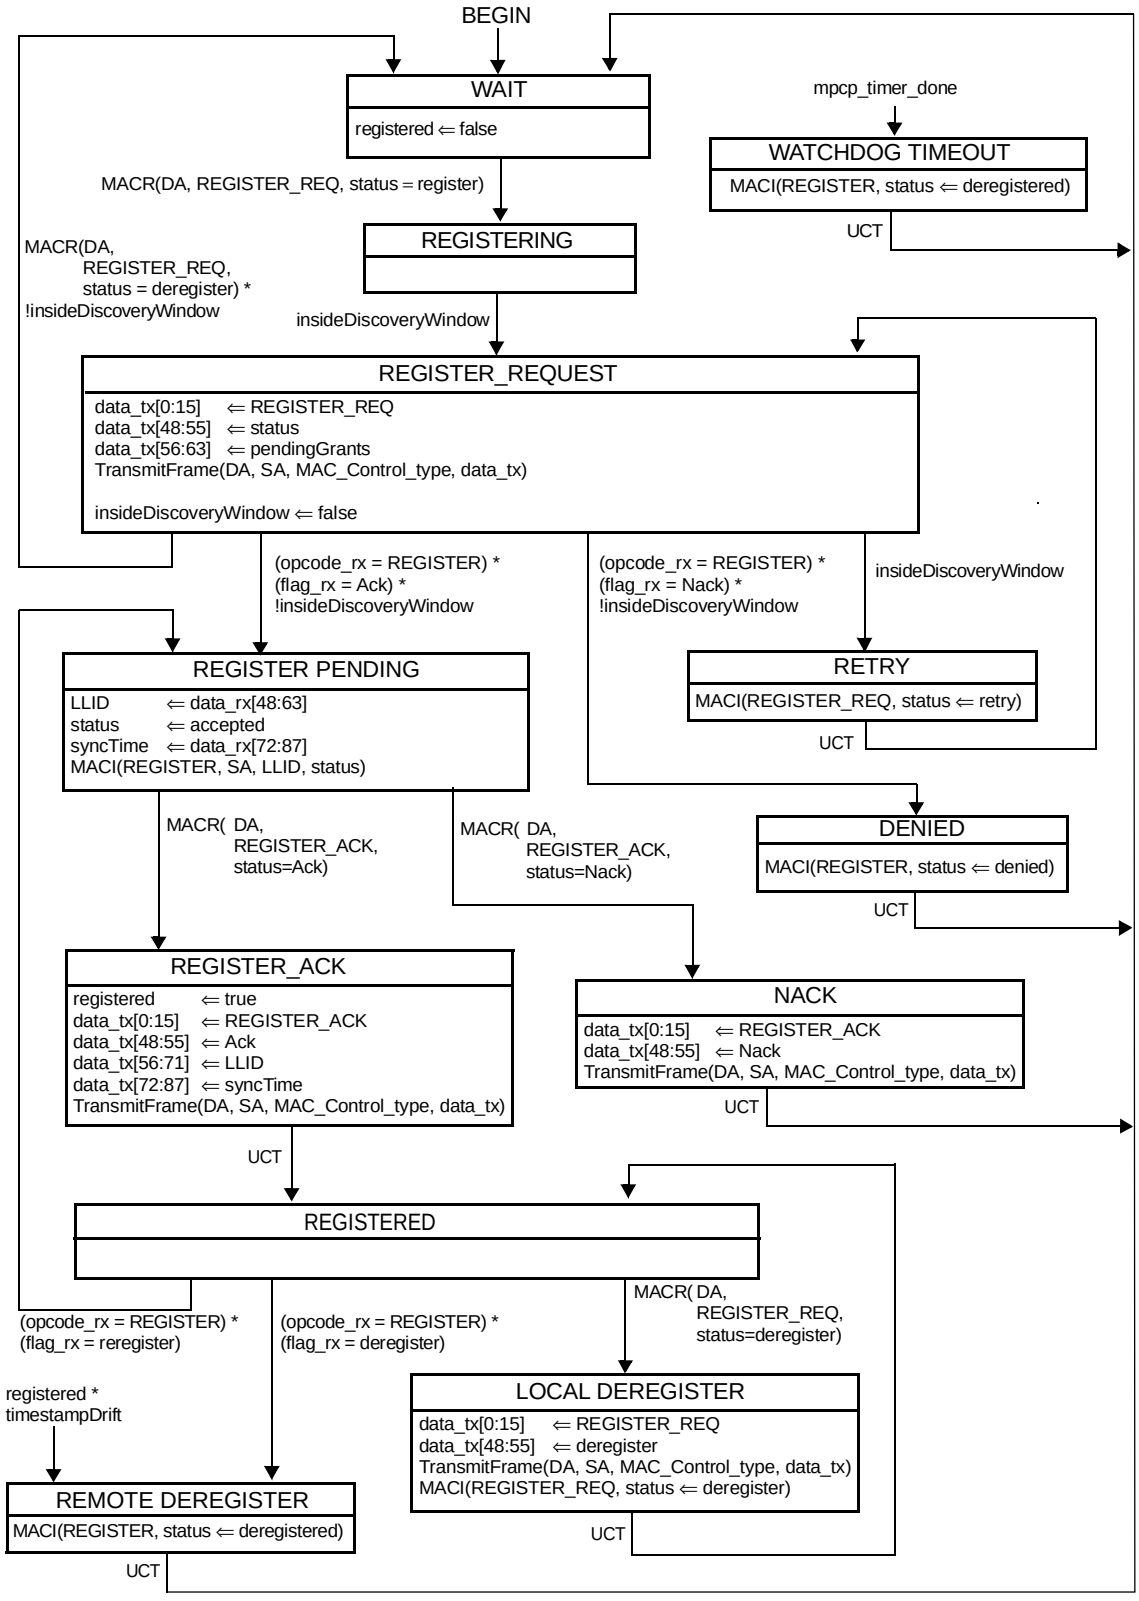


Figure 64–22—Discovery Processing ONU Registration State Diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 497 of 717

64.3.4 Report Processing

The Report Processing functional block has the responsibility of dealing with queue report generation and termination in the network. Reports are generated by higher layers and passed to the MAC Control sublayer by the MAC Control clients. Status reports are used to signal bandwidth needs as well as for arming the OLT watchdog timer.

Reports shall be generated periodically, even when no request for bandwidth is being made. This keeps a watchdog timer in the OLT from expiring and deregistering the ONU. For proper operation of this mechanism the OLT shall grant the ONU periodically.

The Report Processing functional block, and its MPCP protocol elements are designed for use in conjunction with an 802.1P capable bridge.

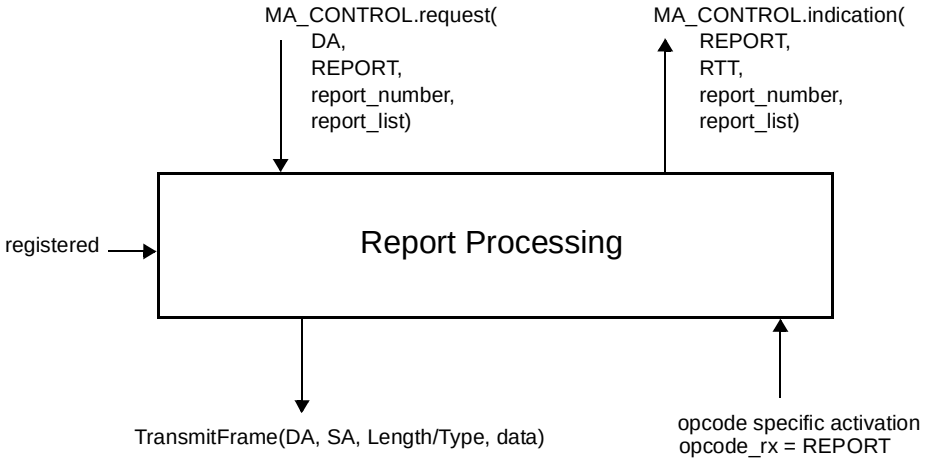


Figure 64–23—Report Processing Service Interfaces

64.3.4.1 Constants

mpcp_timeout

This constant represents the maximum allowed interval of time between two MPCPDU messages. Failure to receive at least one frame within this interval is considered a fatal fault and leads to deregistration.

TYPE 32-bit unsigned
VALUE 03-B9-AC-A0 (1 second)

report_timeout

This constant represents the maximum allowed interval of time between two REPORT messages generated by the ONU.

TYPE 32-bit unsigned
VALUE 00-2F-AF-08 (50 milliseconds)

64.3.4.2 Variables

BEGIN

This variable is used when initiating operation of the functional block state machine. It is set to true following initialization and every reset.

TYPE: boolean

data_rx

This variable is defined in 64.2.2.3.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 498 of 717

data_tx
This variable is defined in 64.2.2.3.

opcode_rx
This variable is defined in 64.2.2.3.

opcode_tx
This variable is defined in 64.2.2.3.

registered
This variable is defined in 64.3.3.2.

64.3.4.3 Functions

TransmitFrame(DA, SA, Length/Type, data)
This function is defined in 64.2.2.4.

64.3.4.4 Timers

report_periodic_timer
ONUs are required to generate REPORT MPCPDUs with a periodicity of less than report_timeout value. This timer counts down time remaining before a forced generation of a REPORT message in an ONU.

mpcp_timer
This timer is defined in 64.3.3.4.

64.3.4.5 Messages

MA_CONTROL.request(DA, REPORT, report_number, report_list)
This service primitive is used by a MAC Control client to request the Report Process at the ONU to transmit a queue status report. This primitive may be called at variable intervals, independently of the granting process, in order to reflect the time varying aspect of the network. This primitive uses the following parameters:

DA:	multicast MAC Control address as defined in Annex 31B.
REPORT:	opcode for REPORT MPCPDU as defined in Table 31A–1.
report_number:	the number of queue status report sets located in report list. The report_number value ranges from 0 to a maximum of 13.
report_list:	the list of queue status reports. A queue status report consists of two fields: valid and status. The parameter valid, is a boolean array with length of 8, ‘0’ or false indicates that the corresponding status field is not present (the length of status field is 0), while ‘1’ or true indicates that the corresponding status field is present (the length of status field is 2 octets). The index of the array is meant to reflect the same numbered priority queue in the 802.1P nomenclature. The parameter status is an array of 16-bit unsigned integer values. This array consists only of entries whose corresponding bit in filed valid is set to true.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 499 of 717

DirecTV Exhibit 1010, Page 500 of 717

MA_CONTROL.indication(REPORT, RTT, report_number, report_list)

The service primitive issued by the Report Process at the OLT to notify the MAC Control client and higher layers the queue status of the MPCP link partner. This primitive may be called multiple times, in order to reflect the time-varying aspect of the network. This primitive uses the following parameters:

REPORT:	opcode for REPORT MPCPDU as defined in Table 31A–1.
RTT:	this parameter holds an updated round trip time value which is recalculated following each REPORT message reception.
report_number:	the number of queue status report sets located in report list. The report_number value ranges from 0 to a maximum of 13.
report_list:	the list of queue status reports. A queue status report consists of two fields: valid and status. The parameter valid, is a boolean array with length of 8, '0' or false indicates that the corresponding status field is not present (the length of status field is 0), while '1' or true indicates that the corresponding status field is present (the length of status field is 2 octets). The index of the array is meant to reflect the same numbered priority queue in the 802.1P nomenclature. The parameter status is an array of 16-bit unsigned integer values. This array consists only of entries whose corresponding bit in filed valid is set to true.

Opcode-specific function(opcode)

Functions exported from opcode specific blocks that are invoked on the arrival of a MAC Control message of the appropriate opcode.

64.3.4.6 State Diagram

The report process in the OLT shall implement the report processing state diagram as shown in Figure 64–23. The report process in the ONU shall implement the report processing state diagram as shown in Figure 64–24. Instantiation of state machines as described is performed for Multi-point MAC Control instances attached to unicast LLIDs only.

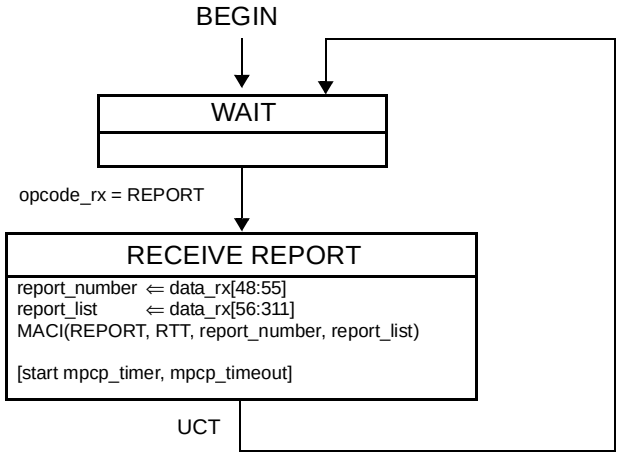


Figure 64–24—Report Processing State Diagram at OLT

 Copyright © 2004 IEEE. All rights reserved.

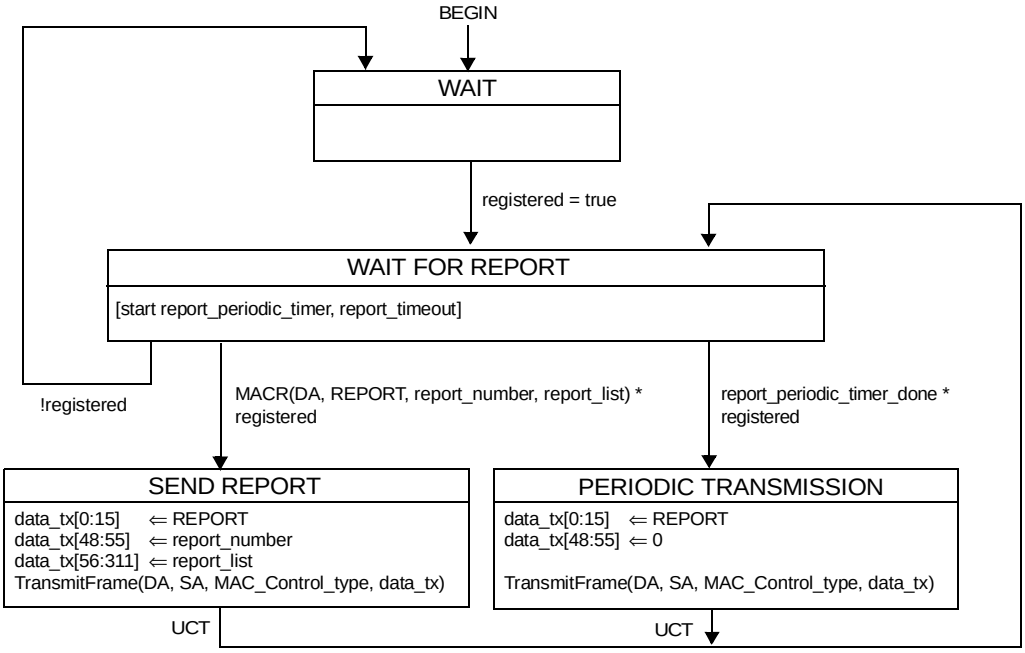


Figure 64–25—Report Processing State Diagram at ONU

64.3.5 Gate Processing

A key concept pervasive in Multi-point MAC Control is the ability to arbitrate a single transmitter out of a plurality of ONUs. The OLT controls an ONU's transmission by the assigning of grants.

The transmitting window of an ONU is indicated in GATE message where start time and length are specified. An ONU will begin transmission when its localTime counter matches start_time value indicated in the GATE message. An ONU will conclude its transmission with sufficient margin to ensure that the laser is turned off before the grant length interval has elapsed.

Multiple outstanding grants may be issued to each ONU. The OLT shall not issue more than the maximal supported maximal outstanding grants as advertised by the ONU during registration (see pending grants in 64.3.6.3).

In order to maintain the watchdog timer at the ONU, grants are periodically generated. For this purpose empty GATE messages may be issued periodically.

When registered, the ONU ignores all gate messages where the discovery flag is set.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 501 of 717

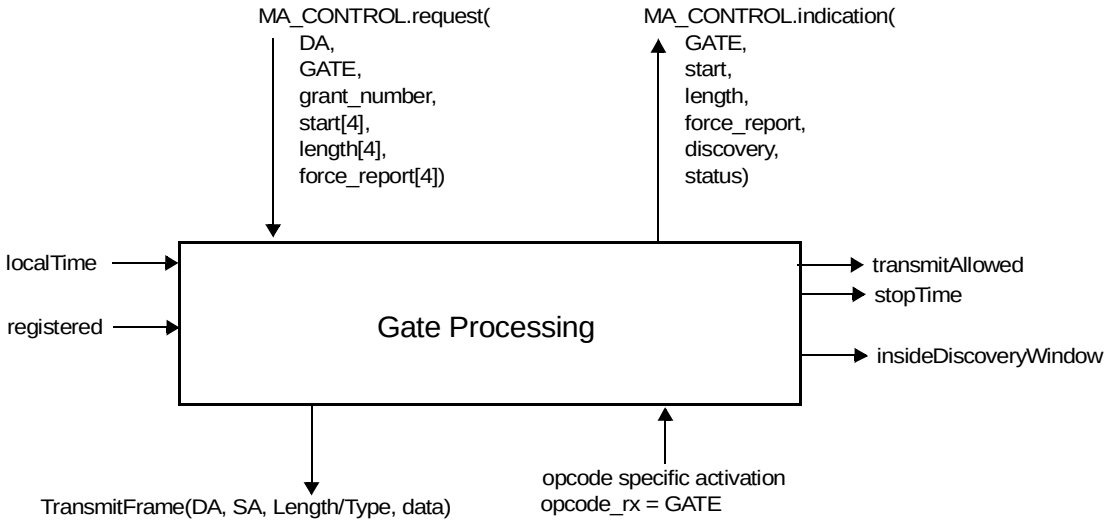


Figure 64–26—Gate Processing Service Interface

64.3.5.1 Constants

discoveryGrantLength

This constant represents the duration of ONU's transmission during discovery attempt. The value of discoveryGrantLength includes MPCPDU transmission time and tailGuard as defined in 64.2.2.1. discoveryGrantLength is represented in units of time_quanta.

TYPE: 32 bit unsigned
VALUE: 00-00-00-26 (608 ns)

gate_timeout

This constant represents the maximum allowed interval of time between two GATE messages generated by the OLT to the same ONU.

TYPE 32-bit unsigned
VALUE 00-2F-AF-08 (50 milliseconds)

laserOffTime

This constant holds the time required to terminate the laser. It counts in time_quanta units the time period required for turning off the PMD, as specified in 60.7.13.1.

TYPE: 32 bit unsigned
VALUE: 00-00-00-20 (512 ns)

laserOnTime

This constant holds the time required to initiate the PMD. It counts in time_quanta units the time period required for turning on the PMD, as specified in 60.7.13.1.

TYPE: 32 bit unsigned
VALUE: 00-00-00-20 (512 ns)

max_future_grant_time

This constant holds the time limiting the future time horizon for a valid incoming grant.

TYPE: 32 bit unsigned
VALUE: 03-B9-AC-A0 (1 second)

min_processing_time

This constant is the time required for the ONU processing time.

TYPE: 32 bit unsigned
VALUE: 00-00-04-00 (16.384 us)

tqSize

This constant is defined in 64.2.2.1.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 502 of 717

64.3.5.2 Variables

BEGIN

This variable is used when initiating operation of the functional block state machine. It is set to true following initialization and every reset.

TYPE: boolean

counter

This variable is used as a loop iterator counting the number of incoming grants in a GATE message.

TYPE: integer

currentGrant

This variable is used for local storage of a pending grant state during processing. It is dynamically set by the Gate Processing functional block and is not exposed.

The state is a structure field composed of multiple subfields.

TYPE: structure {

DA	48 bit unsigned, a.k.a MAC address type
start	32 bit unsigned
length	16 bit unsigned
force_report	boolean
discovery	boolean}

data_rx

This variable is defined in 64.2.2.3.

data_tx

This variable is defined in 64.2.2.3.

effectiveLength

This variable is used for temporary storage of a normalized net time value. It holds the net effective length of a grant normalized for elapsed time, and compensated for the periods required to turn the laser on and off, and waiting for receiver lock.

TYPE: 32 bit unsigned

fecEnabled

This variable is defined in 64.2.2.3.

grantList

This variable is used for storage of the list of pending grants. It is dynamically set by the Gate Processing functional block and is not exposed. Each time a grant is received it is added to the list.

The list elements are structure fields composed of multiple subfields.

The list is indexed by the start subfield in each element for quick searches.

TYPE: list of elements having the structure define in currentGrant

insideDiscoveryWindow

This variable is defined in 64.3.3.2.

maxDelay

This variable holds the maximum delay that can be applied by an ONU before sending the REGISTER MPCPDU. This delay is calculated such that the ONU would have sufficient time to transmit the REGISTER message and its associated overhead (FEC parity date, end-of-frame sequence, etc.) and terminate the laser before the end of the discovery grant.

TYPE 16 bit unsigned

nextGrant

This variable is used for local storage of a pending grant state during processing. It is dynamically set by the Gate Processing functional block and is not exposed. The content of the variable is the next grant to become active.

TYPE: element having same structure as defined in currentGrant

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 503 of 717

nextStopTime
: This variable holds the value of the localTime counter corresponding to the end of the next grant.
TYPE: 32 bit unsigned

registered
: This variable is defined in 64.3.3.2.

stopTime
: This variable is defined in 64.2.2.3.

syncTime
: This variable is defined in 64.3.3.2.

transmitAllowed
: This variable is defined in 64.2.2.3.

64.3.5.3 Functions

empty(list)
: This function is use to check whether the list is empty. When there are no elements queued in the list, the function returns true. Otherwise, a value of false is returned.

InsertInOrder(sorted_list, inserted_element)
: This function is used to queue an element inside a sorted list. The queueing order is sorted. In the condition that the list is full the element may be discarded. The length of the list is dynamic and it's maximal size equals the value advertised during registration as maximum number of pending grants.

IsBroadcast(grant)
: This function is used to check whether its argument represents a broadcast grant, i.e., grant given to multiple ONUs. This is determined by the destination MAC address of the corresponding GATE message. The function returns the value true when MAC address is a global assigned MAC Control address as defined in Annex 31B, and false otherwise.

PeekHead(sorted_list)
: This function is used to check the content of a sorted list. It returns the element at the head of the list without dequeuing the element.

Random(r)
: This function is used to compute a random integer number uniformly distributed between 0 and r. The randomly generated number is then returned by the function.

RemoveHead(sorted_list)
: This function is used to dequeue an element from the head of a sorted list. The return value of the function is the dequeued element.

TransmitFrame(DA, SA, Length/Type, data)
: This function is defined in 64.2.2.4.

64.3.5.4 Timers

gntStTmr
: This timer is used to wait for the event signalling the start of a grant window.
VALUE: The timer value is dynamically set according to the signaled grant start time.

gntWinTmr
: This timer is used to wait for the event signalling the end of a grant window.
VALUE: The timer value is dynamically set according to the signaled grant length.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 504 of 717

gate_periodic_timer

The OLT is required to generate GATE MPCPDUs with a periodicity of less than gate_timeout value. This timer counts down time remaining before a forced generation of a GATE message in the OLT.

mpcp_timer

This timer is defined in 64.3.3.4.

rndDlyTmr

This timer is used to measure a random delay inside the discovery window. The purpose of the delay is to apriori reduce the probability of transmission overlap during the registration process, and thus lowering the expectancy of registration time in the PON.

VALUE: A random value less than the net discovery window size less the REGISTER_REQ MPCPDU frame size less the idle period and laser turn on and off delays less the preamble size less the IFG size. The timer value is set dynamically based on the parameters passed from the client.

64.3.5.5 Messages

MA_CONTROL.request(DA, GATE, grant_number, start[4], length[4], force_report[4])

This service primitive is defined in 64.3.3.5.

MA_CONTROL.indication(GATE, start, length, force_report, discovery, status)

This service primitive issued by the Gate Process at the ONU to notify the MAC Control client and higher layers that a grant is pending. This primitive is invoked multiple times when a single GATE message arrives with multiple grants. It is also generated at the start and end of each grant as it becomes active. This primitive uses the following parameters:

GATE:	opcode for GATE MPCPDU as defined in Table 31A–1.
start:	start time of the grant. This parameter is not present when the status value is deactive.
length:	length of the grant. This parameter is not present when the status value is deactive.
force_report:	flags indicating whether a REPORT message should be transmitted in this grant. This parameter is not present when the status value is deactive.
discovery:	This parameter holds the value true when the grant is to be used for the discovery process, and false otherwise. This parameter is not present when the status value is deactive.
status:	This parameter takes the value *arrive* on grant reception, *active* when a grant becomes active, and *deactive* at the end of a grant.

Opcode-specific function(opcode)

Functions exported from opcode specific blocks that are invoked on the arrival of a MAC Control message of the appropriate opcode.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 505 of 717

64.3.5.6 State Diagrams

The gating process in the OLT shall implement the gate processing state diagram as shown in Figure 64–26. The gating process in the ONU shall implement the gate processing state diagram as shown in Figure 64–27. Instantiation of state machines as described is performed for all Multi-Point MAC Control instances.

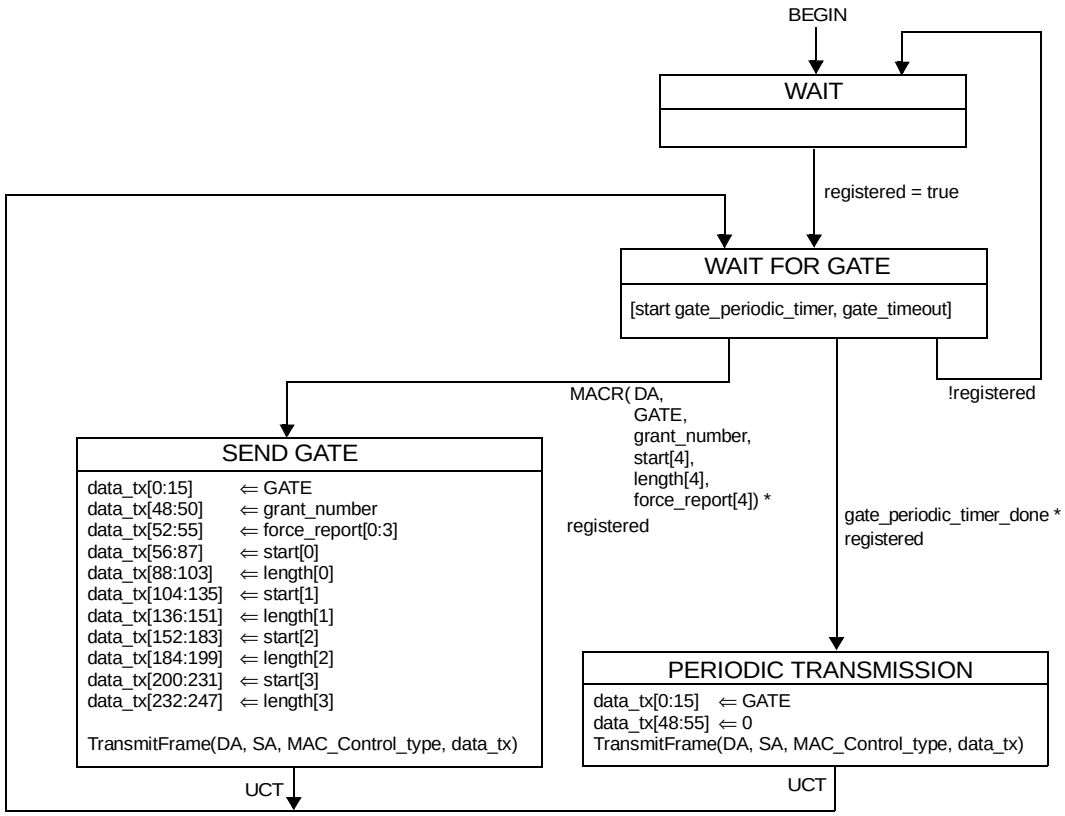


Figure 64–27—Gate Processing State Diagram at OLT

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 506 of 717

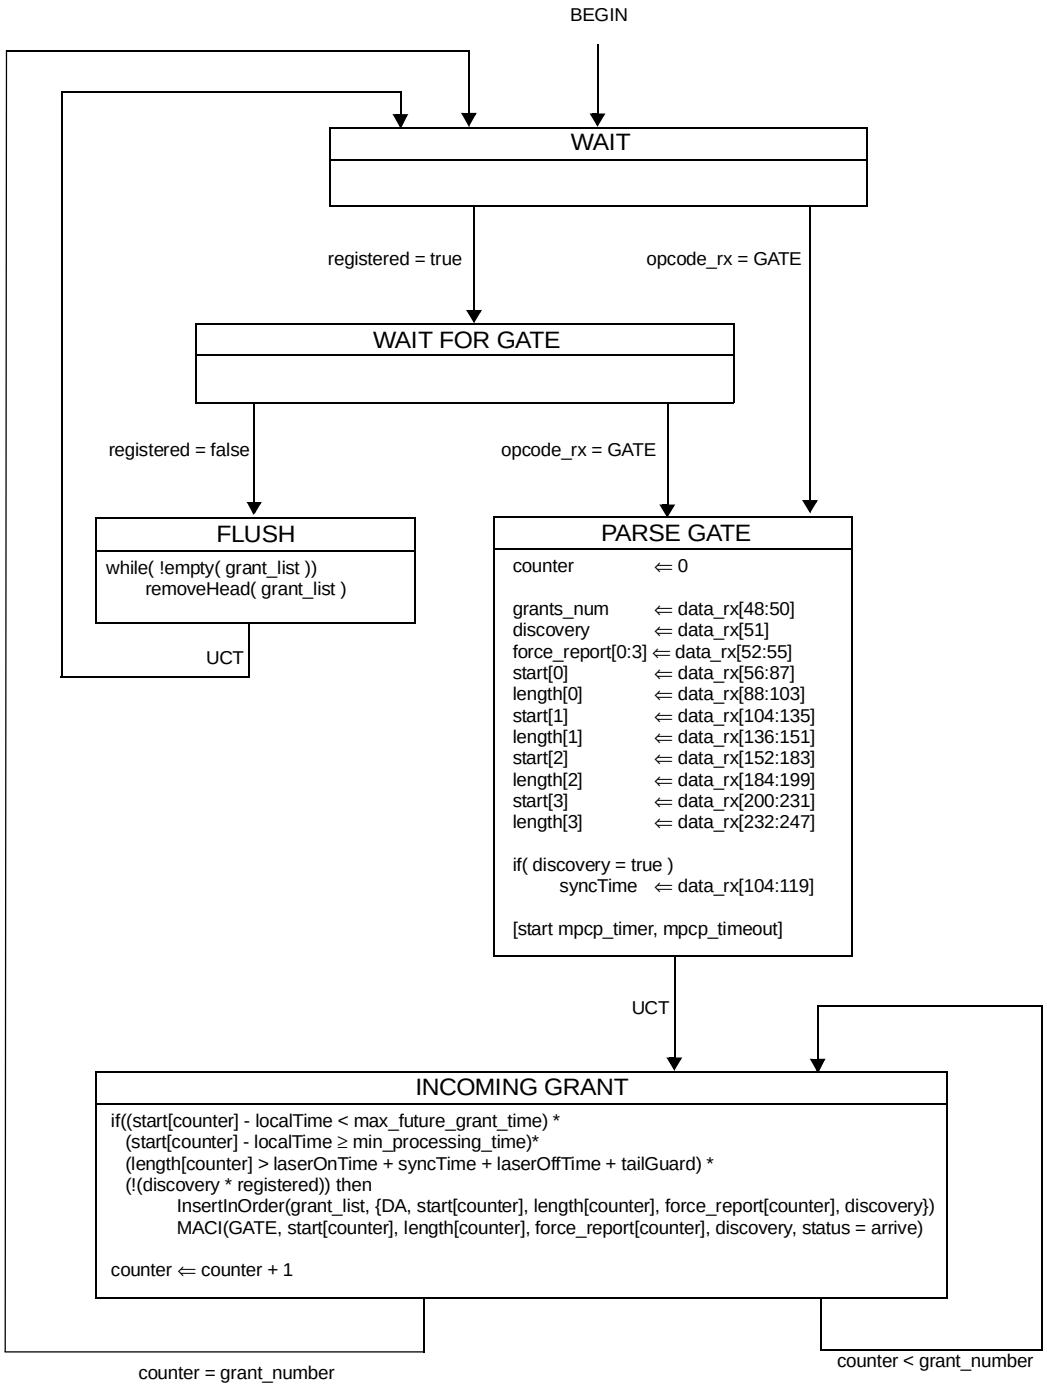


Figure 64–28—Gate Processing ONU Programing State Diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 507 of 717

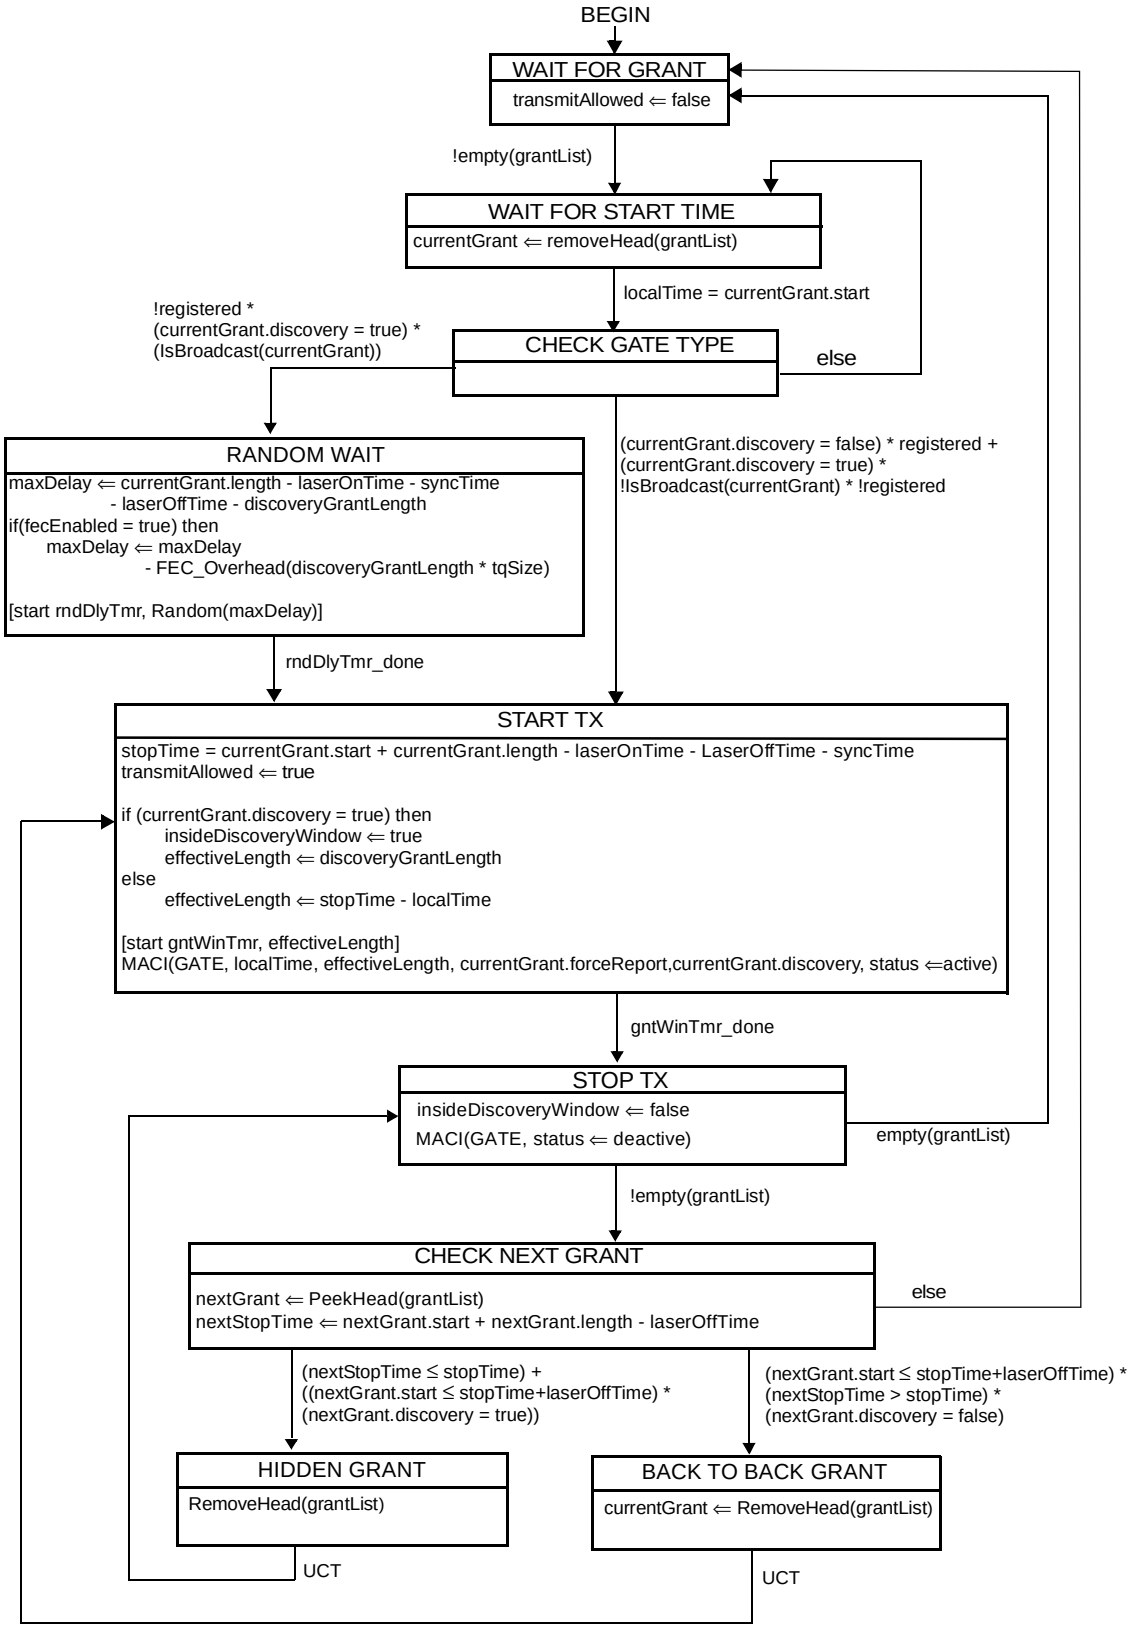


Figure 64–29—Gate Processing ONU Activation State Diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 508 of 717

64.3.6 MPCPDU structure and encoding

MPCP PDU (MPCPDU) are basic IEEE 802.3 frames; they shall not be tagged (see Clause 3). The MPCPDU structure is shown in Figure 64–30, and is further defined in the following definitions:

a) Destination Address (DA). The DA in MPCPDU is the MAC Control Multicast address as specified in the annexes to Clause 31, or the individual MAC address associated with the port to which the MPCPDU is destined.
b) Source Address (SA). The SA in MPCPDU is the individual MAC address associated with the port through which the MPCPDU is transmitted. For MPCPDUs originating at the OLT end, this can be the address any of the individual MACs. These MACs may all share a single unicast address, as explained in 64.1.2.
c) Length/Type. MPCPDUs are always Type encoded, and carry the MAC_Control_Type field value as specified in 31.4.1.3.
d) Opcode. The opcode identifies the specific MPCPDU being encapsulated. Values are defined in Table 31A–1.
e) Timestamp. The timestamp field conveys the content of the localTime register at the time of transmission of the MPCPDUs. This field is 32 bits long, and counts 16 bit transmissions. The timestamp counts time in 16 bit time granularity.
f) Data/Reserved/PAD. These 40 octets are used for the payload of the MPCPDUs. When not used they would be filled with zeros on transmission, and be ignored on reception.
g) FCS. This field is the Frame Check Sequence, typically generated by the underlying MAC.

Based on the MAC instance used to generate the specific MPCPDU, the appropriate LLID shall be generated by the RS.

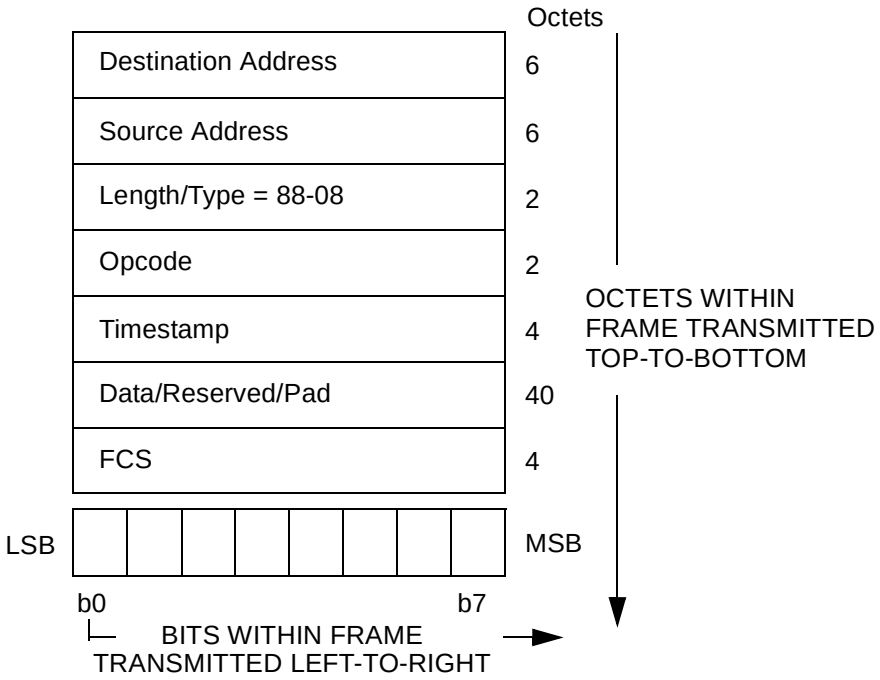


Figure 64–30—Generic MPCPDU

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 509 of 717

64.3.6.1 GATE description

The purpose of GATE message is to grant transmission windows to ONUs for both discovery messages and normal transmission. Up to four grants can be included in a single GATE message. The number of grants can also be set to zero for using the GATE message as an MPCP keep alive from OLT to the ONU.

The GATE MPCPDU is an instantiation of the Generic MPCPDU, and is further defined using the following definitions:

a) Opcode. The opcode for the GATE MPCPDU is 00-02.
b) Flags. This is an 8 bit flag register that holds the following flags: The Number of grants field contains the number of grants, composed of valid Length, Start Time pairs in this MPCPDU. This is a number between 0 and 4. Note: when Number of grants is set to 0, sole purpose of message is conveying of timestamp to ONU.
   The Discovery flag field indicates that the signaled grants would be used for the discovery process, in which case a single grant shall be issued in the gate message.
   The Force Report flag fields ask the ONU to issue a REPORT message related to the corresponding grant number at the corresponding transmission opportunity indicated in this GATE.
c) Grant #n Length. Length of the signaled grant, this is an 16 bit unsigned field. The length is counted in 16 bit time increments. There are 4 Grants that are possibly packed into the GATE MPCPDU. The laserOnTime, syncTime, and laserOffTime are included in and thus consume part of Grant #n Length.
d) Grant #n Start Time. Start time of the grant, this is an 32 bit unsigned field. The start time is compared to the local clock, to correlate the start of the grant. Transmitted values shall satisfy the condition Grant #n Start Time < Grant #n+1 Start Time for consecutive grants within the same GATE MPCPDU.
e) Sync Time. This is an unsigned 16 bit value signifying the required synchronization time of the OLT receiver. During the synchronization time the ONU shall send IDLE code-pairs. The value is counted in 16 bit time increments. The advertised value includes synchronization requirement on all receiver elements including PMD, PMA and PCS. This field is present only when the gate is a discovery gate, as signaled by the Discovery flag and is not present otherwise.

Pad/Reserved. This is an empty field that is transmitted as zeros, and ignored on reception when constructing a complying MPCP protocol implementation. The size of this field depends on the used Grant #n Length/Start Time entry-pairs, and varies in length from 13 – 39 accordingly. The GATE MPCPDU shall be generated by a MAC Control instance mapped to an active ONU, and as such shall be marked with a unicast type of LLID, except when the discovery flag is set where the MAC Control instance is mapped to all ONUs and such frame is marked by the broadcast LLID.

Table 64–1—GATE MPCPDU Number of grants/Flags Fields

Bit	Flag Field	Values
0-2	Number of grants	0–4
3	Discovery	0 - Normal GATE 1 - Discovery GATE
4	Force Report Grant 1	0 - No action required 1 - A REPORT frame should be issued at the corresponding transmission opportunity indicated in Grant 1
5	Force Report Grant 2	0 - No action required 1 - A REPORT frame should be issued at the corresponding transmission opportunity indicated in Grant 2
6	Force Report Grant3	0 - No action required 1 - A REPORT frame should be issued at the corresponding transmission opportunity indicated in Grant 3
7	Force Report Grant 4	0 - No action required 1 - A REPORT frame should be issued at the corresponding transmission opportunity indicated in Grant 4

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 510 of 717

.

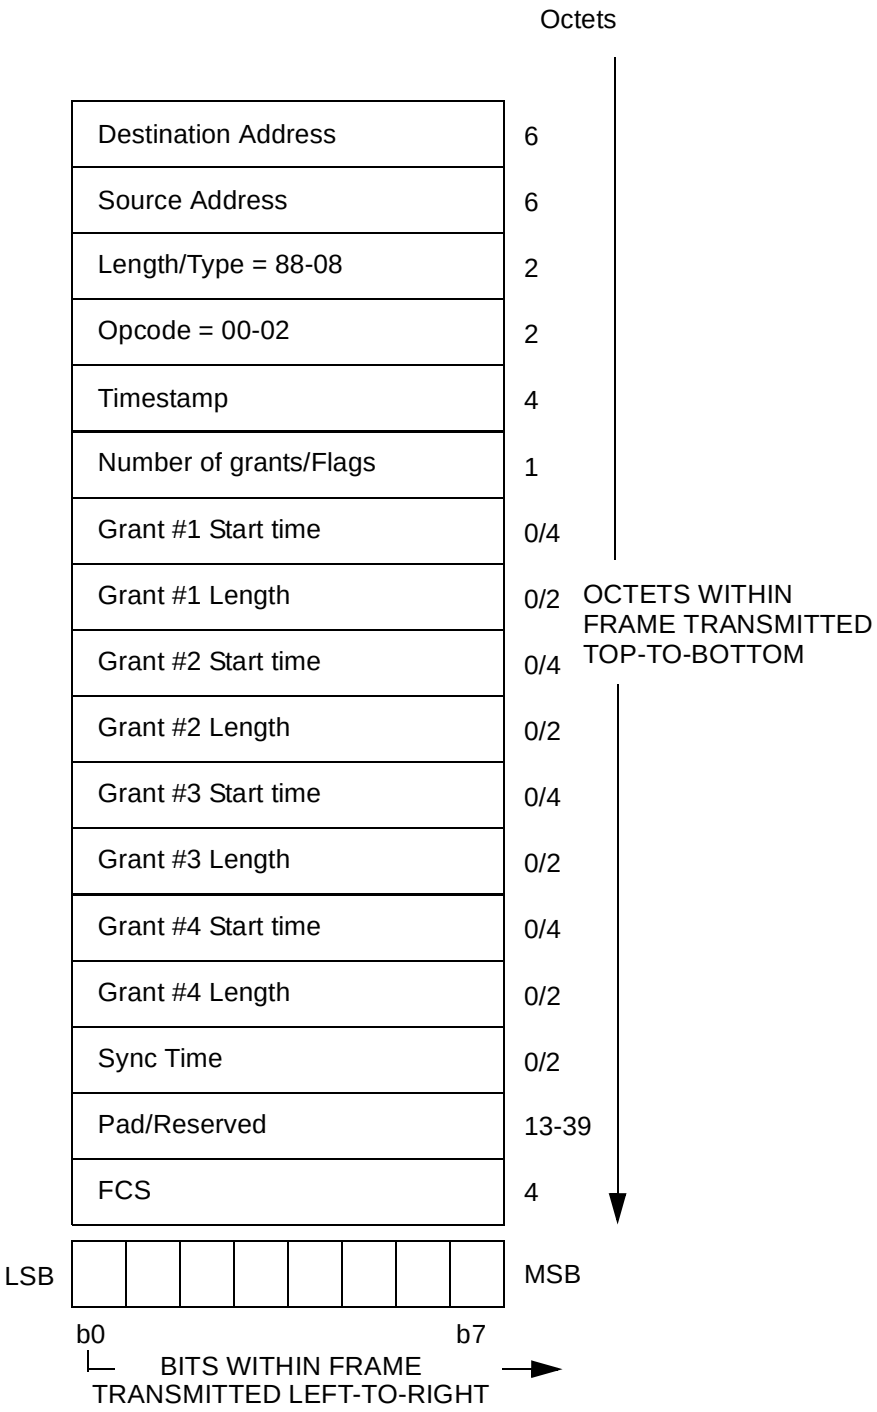


Figure 64–31—GATE MPCPDU

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 511 of 717

64.3.6.2 REPORT description

REPORT messages have several functionalities. Time stamp in each REPORT message is used for round trip (RTT) calculation. In the REPORT messages ONUs indicate the upstream bandwidth needs they request per 802.1Q priority queue. REPORT messages are also used as keep-alives from ONU to OLT. ONUs issue REPORT messages periodically in order to maintain link health at the OLT as defined in 64.3.4. In addition, the OLT may specifically request a REPORT message.

The REPORT MPCPDU is an instantiation of the Generic MPCPDU, and is further defined using the following definitions:

a) Opcode. The opcode for the REPORT MPCPDU is 00-03.
b) Number of Queue Sets. This field specifies the number of requests in the REPORT message. A REPORT frame may hold multiple sets of Report bitmap and Queue #n as specified in the Number of Queue Sets field
c) Report bitmap. This is an 8 bit flag register that indicates which queues are represented in this REPORT MPCPDU.

Table 64–2—REPORT MPCPDU Report bitmap fields

Bit	Flag Field	Values
0	Queue 0	0 - queue 0 report is not present 1 - queue 0 report is present
1	Queue 1	0 - queue 1 report is not present 1 - queue 1 report is present
2	Queue 2	0 - queue 2 report is not present 1 - queue 2 report is present
3	Queue 3	0 - queue 3 report is not present 1 - queue 3 report is present
4	Queue 4	0 - queue 4 report is not present 1 - queue 4 report is present
5	Queue 5	0 - queue 5 report is not present 1 - queue 5 report is present
6	Queue 6	0 - queue 6 report is not present 1 - queue 6 report is present
7	Queue 7	0 - queue 7 report is not present 1 - queue 7 report is present

d) Queue #n Report. This value represents the length of queue# n at time of REPORT message generation. The reported length shall be adjusted to account for the necessary inter-frame spacing and FEC parity data overhead, if FEC is enabled. The Queue #n Report field is an unsigned 16 bit integer representing transmission request in units of time quanta. This field is present only when the corresponding flag in the Report bitmap is set.
e) Pad/Reserved. This is an empty field that is transmitted as zeros, and ignored on reception when constructing a complying MPCP protocol implementation. The size of this field depends on the used Queue Report entries, and accordingly varies in length from 0 to 39.

The REPORT MPCPDU shall be generated by a MAC Control instance mapped to an active ONU, and as such shall be marked with a unicast type of LLID.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 512 of 717

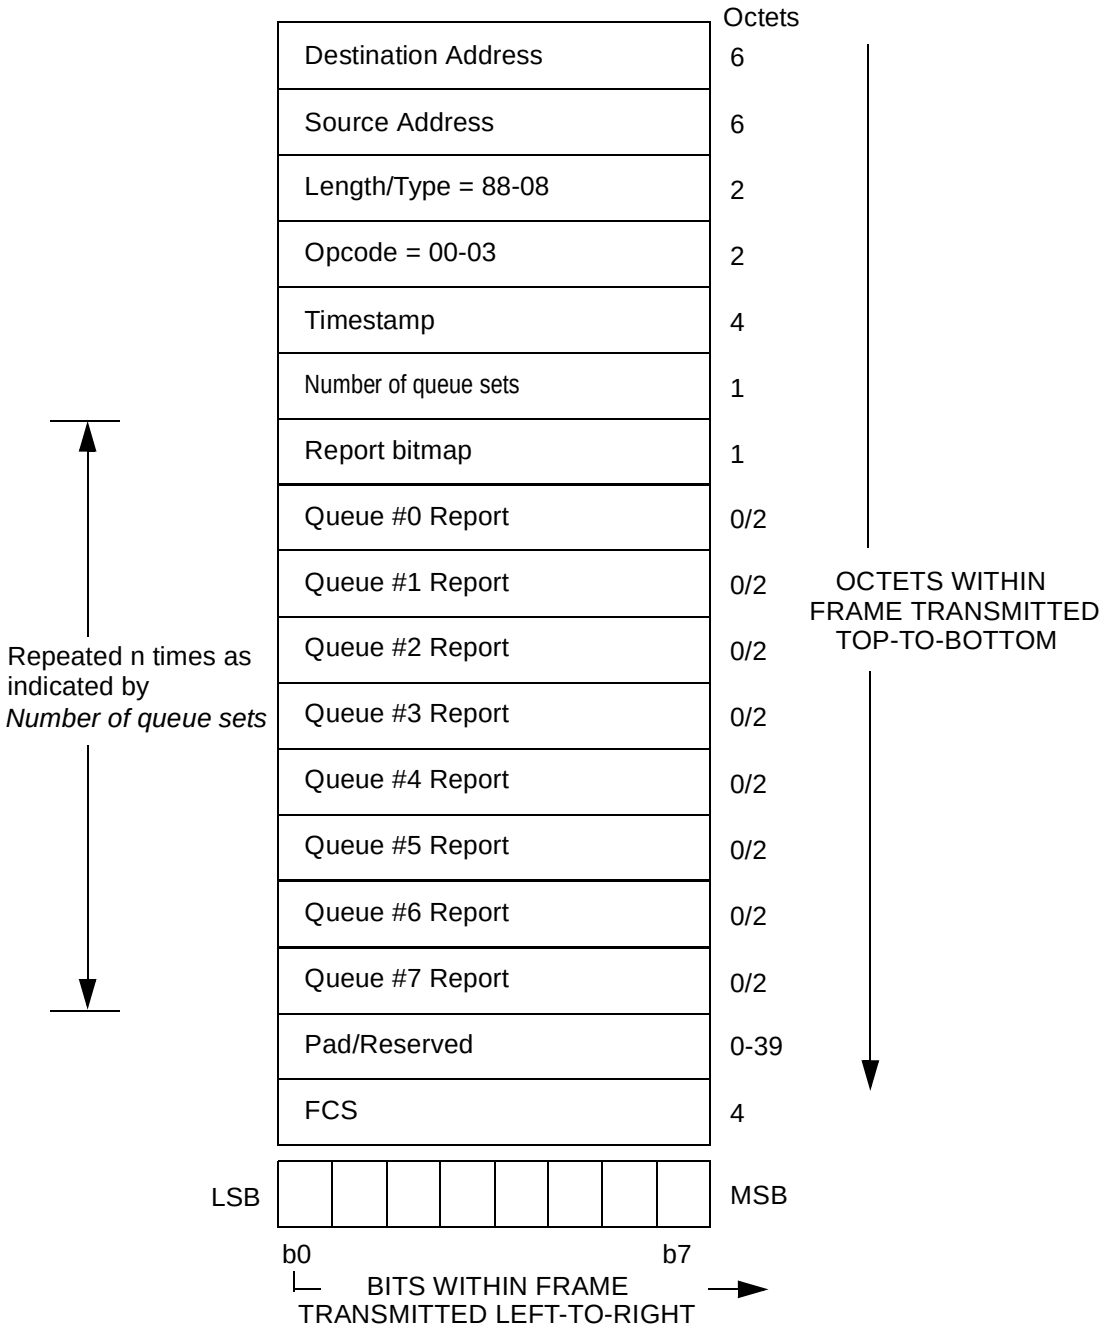


Figure 64–32—REPORT MPCPDU

64.3.6.3 .REGISTER_REQ description

The REGISTER_REQ MPCPDU is an instantiation of the Generic MPCPDU, and is further defined using the following definitions:

a) Opcode. The opcode for the REGISTER_REQ MPCPDU is 00-04.
b) Flags. This is an 8 bit flag register that indicates special requirements for the registration

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 513 of 717

.

Table 64–3—REGISTER_REQ MPCPDU Flags fields

Value	Indication	Comment
0	reserved	Ignored on reception.
1	Register	Registration attempt for ONU.
2	reserved	Ignored on reception.
3	Deregister	This is a request to deregister the ONU. Subsequently, the MAC is deallocated and the LLID may be reused.
4-255	reserved	Ignored on reception.

c) Pending grants. This is an unsigned 8 bit value signifying the maximum number of future grants the ONU is configured to buffer. The OLT should not grant the ONU more than this maximum number of Pending grants vectors comprised of {start, length, force_report, discovery} into the future.

d) Pad/Reserved. This is an empty field that is transmitted as zeros, and ignored on reception when constructing a complying MPCP protocol implementation.

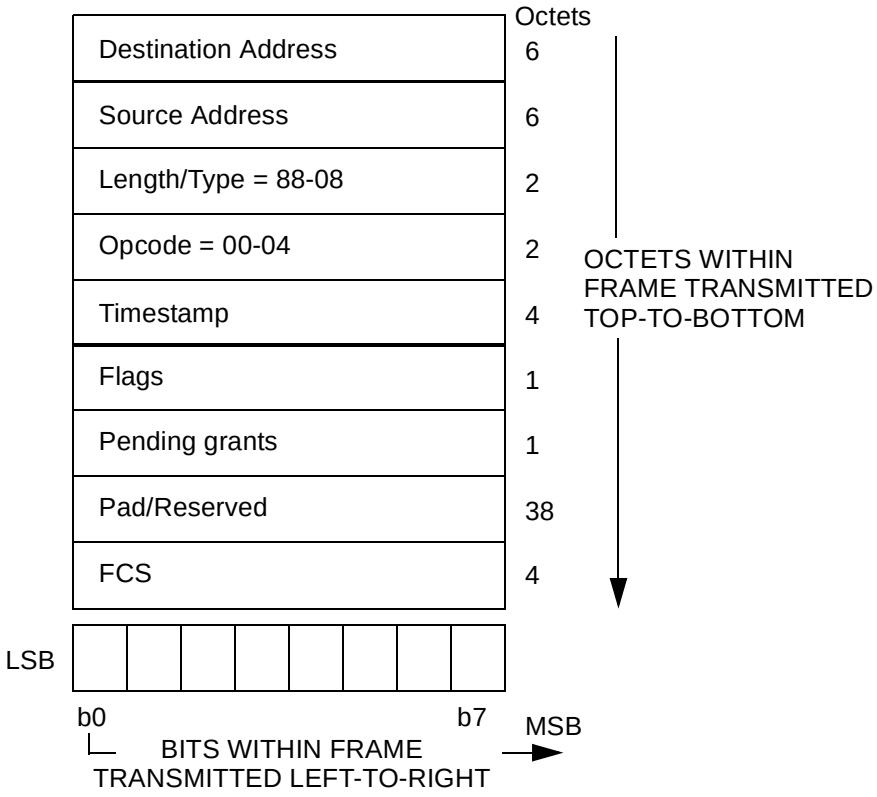


Figure 64–33—REGISTER_REQ MPCPDU

The REGISTER_REQ MPCPDU shall be generated by a MAC Control instance mapped to an undiscovered ONU, and as such shall be marked with a broadcast type of LLID.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 514 of 717

64.3.6.4 REGISTER description

The REGISTER MPCPDU is an instantiation of the Generic MPCPDU, and is further defined using the following definitions:

a) DA. The destination address used shall be an individual MAC address.
b) Opcode. The opcode for the REGISTER MPCPDU is 00-05.
c) Assigned Port. This field holds a 16 bit unsigned value reflecting the LLID of the port assigned following registration.
d) Flags. this is an 8 bit flag register that indicates special requirements for the registration.

Table 64–4—REGISTER MPCPDU Flags field

Value	Indication	Comment
0	Reserved	Ignored on reception.
1	Reregister	The ONU is explicitly asked to re-register.
2	Deregister	This is a request to deallocate the port and free the LLID. Subsequently, the MAC is deallocated.
3	Ack	The requested registration is successful.
4	Nack	The requested registration attempt is denied by the higher-layer-entity.
5–255	Reserved	Ignored on reception.

e) Sync Time. This is an unsigned 16 bit value signifying the required synchronization time of the OLT receiver. During the synchronization time the ONU transmits only IDLE code-pairs. The value is counted in 16 bit time increments. The advertised value includes synchronization requirement on all receiver elements including PMD, PMA and PCS.
f) Echoed pending grants. This is an unsigned 8 bit value signifying the number of future grants the ONU may buffer before activating. The OLT should not grant the ONU more than this number of grants into the future.
g) Pad/Reserved. This is an empty field that is transmitted as zeros, and ignored on reception when constructing a complying MPCP protocol implementation.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 515 of 717

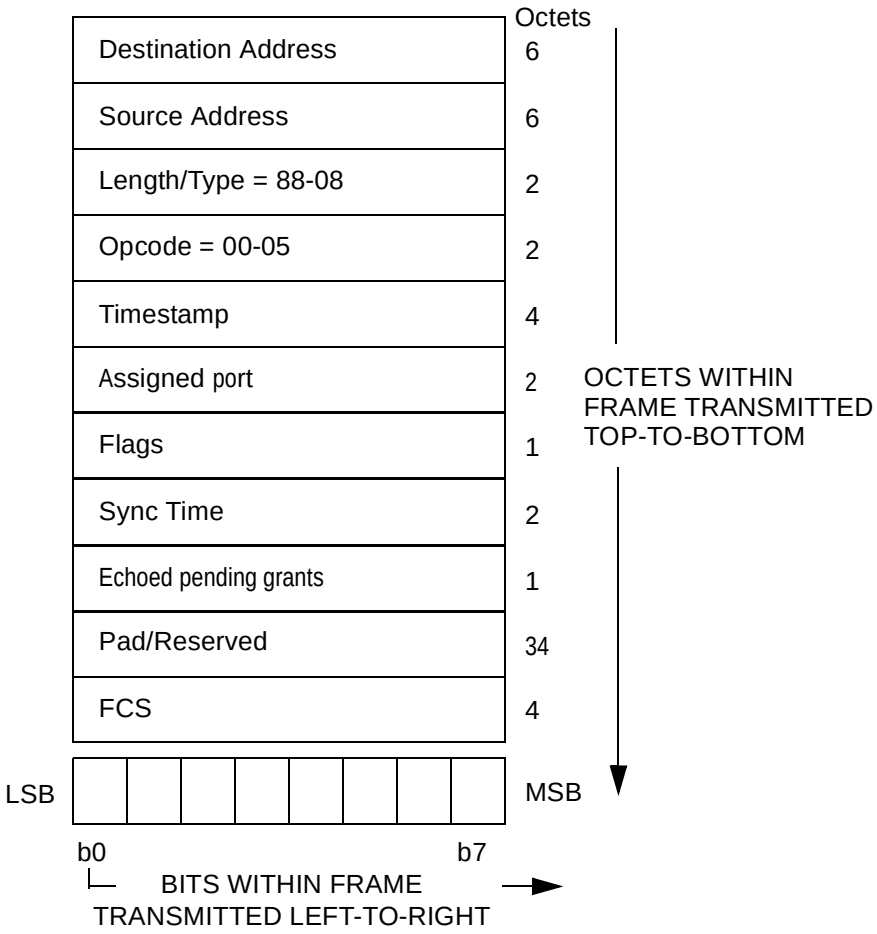


Figure 64–34—REGISTER MPCPDU

The REGISTER MPCPDU shall be generated by a MAC Control instance mapped to all ONUs and such frame is marked by the broadcast LLID.

64.3.6.5 REGISTER_ACK description

The REGISTER_ACK MPCPDU is an instantiation of the Generic MPCPDU, and is further defined using the following definitions:

a) Opcode. The opcode for the REGISTER_ACK MPCPDU is 00-06.
b) Flags. this is an 8 bit flag register that indicates special requirements for the registration.Echoed assigned port. This field holds a 16 bit unsigned value reflecting the LLID of the port assigned following registration.
c) Echoed Sync Time. This is an unsigned 16 bit value echoing the required synchronization time of the OLT receiver as previously advertised (see 64.3.6.4).
d) Pad/Reserved. This is an empty field that is transmitted as zeros, and ignored at reception when constructing a complying MPCP protocol implementation.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 516 of 717

.

Table 64–5—REGISTER_ACK MPCPDU Flags fields

Value	Indication	Comment
0	Nack	The requested registration attempt is denied by the higher-layer-entity.
1	Ack	The registration process is successfully acknowledged.
2–255	Reserved	Ignored on reception.

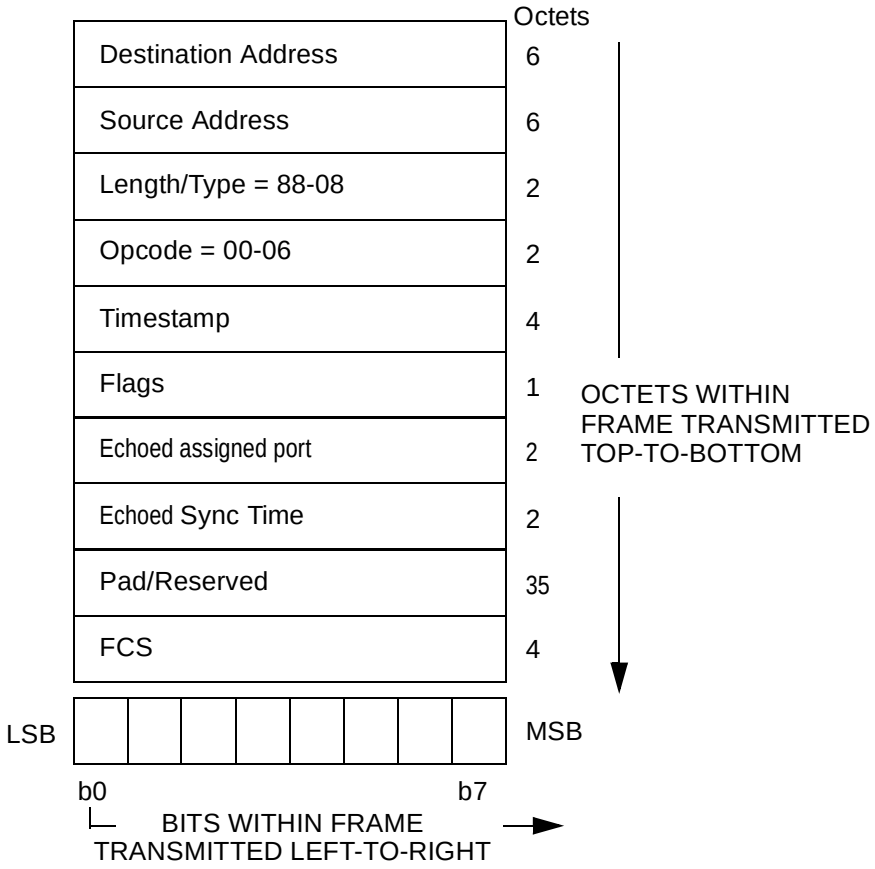


Figure 64–35—REGISTER_ACK MPCPDU

The REGISTER_ACK MPCPDU shall be generated by a MAC Control instance mapped to an active ONU, and as such shall be marked with a unicast type of LLID.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 517 of 717

64.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 64, Multi-point MAC Control[21]

64.4.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 64 Multi-point MAC Control, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

64.4.2 Identification

64.4.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Names(s)	
NOTES 1—Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. 2—The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

64.4.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Clause 64, Multi-point MAC Control
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[21]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 518 of 717

64.4.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
*OLT	OLT Functionality	64.1	Device supports functionality required for OLT	O/1	Yes [ ] No [ ]
*ONU	ONU Functionality	64.1	Device supports functionality required for ONU	O/1	Yes [ ] No [ ]

64.4.4 PICS proforma tables for Multi-point MAC Control

64.4.4.1 Compatibility Considerations

Item	Feature	Subclause	Value/Comment	Status	Support
CC1	Delay through MAC and PHY	64.3.2.4	Maximum delay variation of 16 ns (1 time_quantum)	M	Yes [ ]
CC2	OLT grant time delays	64.3.2.4	Not grant nearer than 1024 time_quanta into the future	OLT:M	Yes [ ]
CC3	ONU processing delays	64.3.2.4	Must process all messages in less than 1024 time_quanta	ONU:M	Yes [ ]
CC4	OLT grant issuance	64.3.2.4	Not grant more than one message every 1024 time_quanta	OLT:M	Yes [ ]

64.4.4.2 Multi-point MAC Control

Item	Feature	Subclause	Value/Comment	Status	Support
OM1	OLT localTime	64.2.2.2	Track transmit clock	OLT:M	Yes [ ]
OM2	ONU localTime	64.2.2.2	Track receive clock	ONU:M	Yes [ ]
OM3	Random wait for transmitting REGISTER_REQ messages	64.3.3	Shorter than length of discovery time window	ONU:M	Yes [ ]
OM4	Periodic report generation	64.3.4	Reports are generated periodically	ONU:M	Yes [ ]
OM5	Periodic granting	64.3.4	Grants are issued periodically	OLT:M	Yes [ ]
OM6	Issuing of grants	64.3.5	Not issue more than maximal supported grants	OLT:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 519 of 717

64.4.4.3 State Machines

Item	Feature	Subclause	Value/Comment	Status	Support
SM1	Multi-Point Transmission Control	64.2.2.7	Meets the requirements of Figure 64–9	M	Yes [ ]
SM2	OLT Control Parser	64.2.2.7	Meets the requirements of Figure 64–10	M	Yes [ ]
SM3	ONU Control Parser	64.2.2.7	Meets the requirements of Figure 64–11	M	Yes [ ]
SM4	OLT Control Multiplexer	64.2.2.7	Meets the requirements of Figure 64–12	OLT:M	Yes [ ]
SM5	ONU Control Multiplexer	64.2.2.7	Meets the requirements of Figure 64–13	OLT:M	Yes [ ]
SM6	Discovery Processing OLT Window Setup	64.3.3.6	Meets the requirements of Figure 64–18	OLT:M	Yes [ ]
SM7	Discovery Processing OLT Process Requests	64.3.3.6	Meets the requirements of Figure 64–19	OLT:M	Yes [ ]
SM8	Discovery Processing OLT Register	64.3.3.6	Meets the requirements of Figure 64–20	ONU:M	Yes [ ]
SM9	Discovery Processing OLT Final Registration	64.3.3.6	Meets the requirements of Figure 64–21	OLT:M	Yes [ ]
SM10	Discovery Processing ONU Registration	64.3.3.6	Meets the requirements of Figure 64–22	ONU:M	Yes [ ]
SM11	Report Processing at OLT	64.3.4.6	Meets the requirements of Figure 64–24	OLT:M	Yes [ ]
SM12	Report Processing at ONU	64.3.4.6	Meets the requirements of Figure 64–25	ONU:M	Yes [ ]
SM13	Gate Processing at OLT	64.3.5.6	Meets the requirements of Figure 64–27	OLT:M	Yes [ ]
SM14	Gate Processing at ONU	64.3.5.6	Meets the requirements of Figure 64–28	ONU:M	Yes [ ]
SM15	Gate Processing ONU Activation	64.3.5.6	Meets the requirements of Figure 64–29	ONU:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 520 of 717

64.4.4.4 MPCP

Item	Feature	Subclause	Value/Comment	Status	Support
MP1	VLAN Tags	64.3.6	MPCPDU are not tagged	M	Yes [ ]
MP2	LLID for MPCPDU	64.3.6	RS generates LLID for MPCPDU	M	Yes [ ]
MP3	Grants during discovery	64.3.6.1	Single grant in GATE message during discovery	OLT:M	Yes [ ]
MP4	Grant start time	64.3.6.1	Grants within one GATE MPCPDU are sorted by their Start time values	OLT:M	Yes [ ]
MP5	TX during synchronization	64.3.6.1	Transmit IDLE code groups	ONU:M	Yes [ ]
MP6	GATE generation	64.3.6.1	GATE generated for active ONU except during discovery	OLT:M	Yes [ ]
MP7	GATE LLID	64.3.6.1	Unicast LLID except for discovery	OLT:M	Yes [ ]
MP8	REPORT issuing	64.3.6.2	Issues REPORT periodically	ONU:M	Yes [ ]
MP9	REPORT generation	64.3.6.2	Generated by active ONU	ONU:M	Yes [ ]
MP10	REPORT LLID	64.3.6.2	REPORT has unicast LLID	ONU:M	Yes [ ]
MP11	REGISTER_REQ generation	64.3.6.3	Generated by undiscovered ONU	ONU:M	Yes [ ]
MP12	REGISTER_REQ LLID	64.3.6.3	Use broadcast LLID	ONU:M	Yes [ ]
MP13	REGISTER DA address	64.3.6.4	Use individual MAC address	OLT:M	Yes [ ]
MP14	REGISTER generation	64.3.6.4	Generated for all ONUs	OLT:M	Yes [ ]
MP15	REGISTER_ACK generation	64.3.6.5	Generated by active ONU	ONU:M	Yes [ ]
MP16	REGISTER_ACK LLID	64.3.6.5	Use unicast LLID	ONU:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 521 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 522 of 717

65. Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction

This clause describes functions for use in a 1000BASE-PX Point to Multi-Point (P2MP) networks. This is an optical multi-point network that connects multiple DTEs using a single shared fiber. The architecture is asymmetrical, based on a tree and branch topology utilizing passive optical splitters. This type of network requires that the Multi-Point MAC Control sublayer exists above the MACs, as described in Clause 64.

65.1 Extensions of the Reconciliation Sublayer (RS) for Point to Point Emulation

65.1.1 Overview

This subclause extends Clause 35 to enable multiple data link layers to interface with a single physical layer. The number of MACs supported is limited only by the implementation. It is acceptable for only one MAC to be connected to this Reconciliation Sublayer. Figure 65–1 shows the relationship of this RS to the ISO/IEC OSI reference model. The mapping of GMII signals to PLS service primitives is described in 35.2.1.

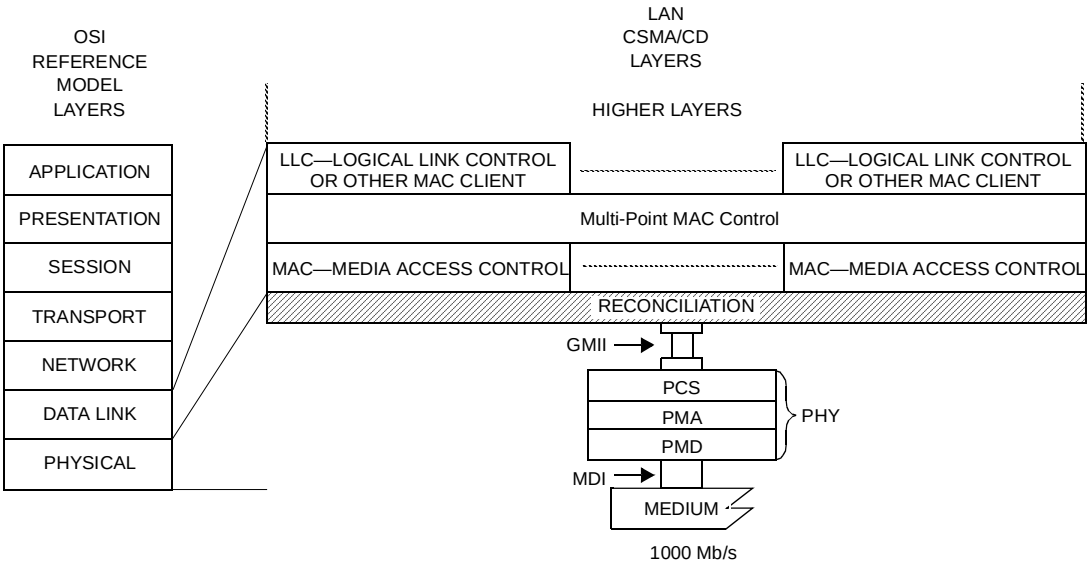


Figure 65–1—RS location in the OSI protocol stack

65.1.2 Principle of operation

A successful registration process, described in 64.3.3, results in the assignment of values to the MODE and LLID variables associated with a MAC. This may be one of many MACs in an Optical Line Terminal (OLT) or a single MAC in an Optical Network Unit (ONU). The MODE and LLID variables are used to identify a packet transmitted from that MAC and how received packets are directed to that MAC. The PCS of OLT shall operate in unidirectional mode as defined in 66.2.2.

As described in 64.1.2, multiple MACs within an OLT are bound to a single GMII, while at the ONU a single MAC is bound to the GMII. The multi-point control protocol (MPCP) ensures that only one MAC is transmitting at any one time. Correspondingly, only one PLS_DATA.request primitive is active at any time. The active PLS_DATA.request is mapped to the GMII signals, TXD<7:0>, TX_EN, TX_ER, and GTX_CLK. The RS replaces octets of preamble with the values of the transmitting MAC's MODE and LLID variables.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 523 of 717

In the receive direction, these MODE and LLID values, embedded within the preamble, identify the MAC to which this frame should be directed. The RS establishes a temporal mapping of the GMII signals, RXD<7:0>, RX_ER, RX_CLK, and RX_DV, to the correct PLS_DATA.indicate and PLS_DATA_VALID.indication primitives.

65.1.3 Functional specifications

The variables below provide a mapping between MODE and LLID variables and multiple MACs. While the usage of this mapping is less interesting in the ONU, it is critical in the OLT. This mapping is used to replace transmitted preambles with MODE and LLID fields as well as to steer received packets to the appropriate MAC.

65.1.3.1 Variables

enable
: Value: Boolean
: This variable shall be TRUE for an ONU MAC. For an OLT MAC, this variable is defined as below:
: TRUE when management has assigned a value to mode and logical_link_id. Indicates the MAC is enabled to receive frames.
: FALSE when the MAC is not in use.

mode
: Value: 1 bit
: This variable shall be 0 for an ONU MAC and may be 0 or 1 for an OLT MAC.
: When the LLID is used to emulate a single copy broadcast or multicast channel, this variable will be set to 1. When emulating a unicast channel, this variable will be set to 0.

logical_link_id
: Value: 15 bits
: This variable shall be set to the broadcast value of 0x7FFF for the unregistered ONU MAC. Enabled OLT MACs may use any value for this variable. Registered ONU MACs may use any value other than 0x7FFF for this variable.

65.1.3.2 Transmit

The transmit function of this extended RS replaces some of the octets of the preamble as transmitted by the MAC with several fields: SLD (start of LLID delimiter), LLID and CRC8. The SLD field is used by the receiver function to locate the LLID and CRC8 fields. The LLID field identifies the source or destination MAC. The CRC8 field provides a level of integrity on the LLID field. Table 65–1 shows the replacement mapping.

Table 65–1—Preamble/SFD replacement mapping

Offset	Field	Preamble/SFD	Modified preamble/SFD
1	-	0x55	same
2	-	0x55	same
3	SLD	0x55	0xd5
4	-	0x55	same
5	-	0x55	same
6	LLID[15:8]	0x55	<mode,logical_link_id[14:8]>[a]
7	LLID[7:0]	0x55	<logical_link_id[7:0]>[b]
8	CRC8	0xd5	The 8 bit CRC calculated over offsets 3 through 7

[a]mode maps to TXD[7], logical_link_id[14] maps to TXD[6], logical_link_id[8] maps to TXD[0]

[b]logical_link_id[7] maps to TXD[7], logical_link_id[0] maps to TXD[0]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 524 of 717

65.1.3.2.1 SLD

The SLD field is one octet in length and replaces the third octet of the preamble.

NOTE 1 – The 1000BASE-X PCS transmit function replaces the first octet of preamble with the /S/ code-group or it discards the first octet and replaces the second octet of preamble with the /S/ code-group. This decision is based upon the even or odd alignment of the PCS's transmit state diagram (see Figure 36-5). The 1000BASE-X PCS receive function replaces the /S/ code-group with an octet of preamble. The third octet of preamble is the first octet passed through the 1000BASE-X PHY without modification.

65.1.3.2.2 LLID


The LLID field is two octets in length and replaces the last two octets of preamble. The LLID field is a concatenation of the mode and logical_link_id variables for the associated MAC.

65.1.3.2.3 CRC-8

The CRC8 field contains an 8-bit Cyclic Redundancy Check value. This value is computed as a function of the contents of the modified preamble beginning with the SLD field (offset 3) through the LLID field (offset 7). The encoding is defined by the following generating polynomial:

$$G(x) = x^8 + x^2 + x + 1 \qquad (65\text{-}1)$$

This CRC calculation shall produce the same result as the serial implementation shown in Figure 65–2. Before calculation begins, the shift register shall be initialized to the value 0x00. The content of the shift register is transmitted without inversion.

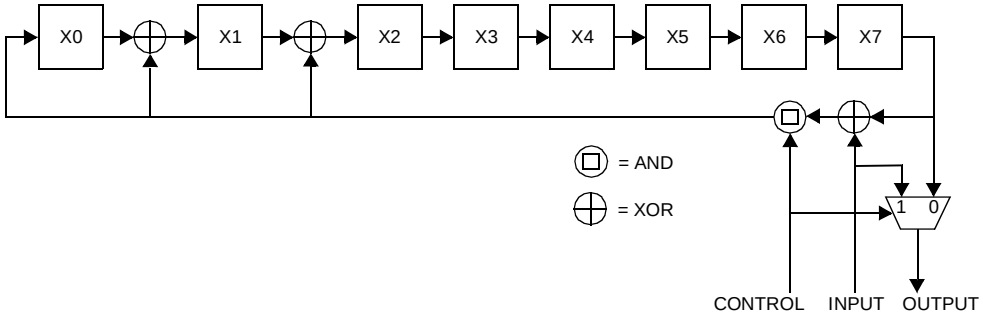

CONTROL = 1 when shifting the modified preamble and calculating the CRC
CONTROL = 0 when transmitting the CRC8 field

Figure 65–2—CRC8 field generation

65.1.3.3 Receive function

The receive function of this extended RS is responsible for the following functions:

a) locate the SLD field;
b) use the location of the SLD field to locate the CRC8 field and verify that the received value matches the CRC calculated using the received data;
c) use the location of the SLD field to locate the LLID field and parse it to determine the destination MAC;
d) if the packet is not discarded due to incorrect CRC or unknown LLID, then replace the SLD and LLID fields with normal preamble and the CRC8 field with the SFD and transfer the packet to the appropriate MAC;
e) otherwise, discard the entire packet, replacing it with normal inter-frame.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 525 of 717

Table 65–2 shows the mapping of the modified preamble/SFD to RXD.

Table 65–2—Preamble/SFD replacement mapping

Signal	Bit values of octets received through GMII[a]									
RXD0	X	1[b]	1	1[c]	1	1	logical_link_id[8][d]	logical_link_id[0][e]	X7[f]	D0[g]
RXD1	X	0	0	0	0	0	logical_link_id[9]	logical_link_id[1]	X6	D1
RXD2	X	1	1	1	1	1	logical_link_id[10]	logical_link_id[2]	X5	D2
RXD3	X	0	0	0	0	0	logical_link_id[11]	logical_link_id[3]	X4	D3
RXD4	X	1	1	1	1	1	logical_link_id[12]	logical_link_id[4]	X3	D4
RXD5	X	0	0	0	0	0	logical_link_id[13]	logical_link_id[5]	X2	D5
RXD6	X	1	1	1	1	1	logical_link_id[14]	logical_link_id[6]	X1	D6
RXD7	X	0	0	1	0	0	mode	logical_link_id[7]	X0	D7
RX_DV	0	1	1	1	1	1	1	1	1	1

[a]Leftmost octet is the first received
[b]This octet may be missing per 1000BASE-X PCS transmit state diagram (see Figure 36-5)
[c]SLD field
[d]First octet of LLID field
[e]Second octet of LLID field
[f]CRC8 field
[g]D0 through D7 is the first octet of the PDU (first octet of the Destination Address)

65.1.3.3.1 SLD

Recall that the 1000BASE-X transmit function must maintain an even alignment for its Start_of_Packet delimiters. It may replace the first octet of preamble with the /S/ code-group and pass the second octet unchanged or it may discard the first octet of preamble and replace the second octet of preamble with the /S/ code-group. The SLD is transmitted in the third octet. These are the only two possibilities considered when parsing the incoming octet stream for the SLD. If the SLD field isn't found then the packet shall be discarded. If the packet is transferred, the SLD shall be replaced with a normal preamble octet and the one or two octets preceding the SLD and the two octets following the SLD are passed without modification.

65.1.3.3.2 LLID

The third and fourth octets following the SLD contain the mode and logical_link_id values. These values are acted upon differently for OLTs and ONUs.

If the device is an OLT then the following comparison is made:

a) the received mode bit is ignored.
b) if the received logical_link_id value matches 0x7FFF and an enabled MAC exists with a logical_link_id variable with the same value then the comparison is considered a match to that MAC.
c) if the received logical_link_id value is any value other than 0x7FFF and an enabled MAC exists with a mode variable with a value of 0 and a logical_link_id variable with a value matching the received logical_link_id value then the comparison is considered a match to that MAC.

If the device is an ONU then the following comparison is made:

a) if the received mode bit is 0 and the received logical_link_id value matches the logical_link_id variable then the comparison is considered a match;
b) if the received mode bit is 1 and the received logical_link_id value doesn't match the logical_link_id variable, or the received logical_link_id matches 0x7FFF, then the comparison is considered a match.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 526 of 717

If no match is found, then the packet shall be discarded within the RS. If a match is found, then the packet is intended to be transferred. If the packet is transferred, then both octets of the LLID field shall be replaced with normal preamble octets.

65.1.3.3.3 CRC-8

The octet following the LLID field contains the CRC8 field. The value of this field is compared against the calculated CRC of the received octets, beginning with the SLD field and ending with the last octet of the LLID field. If the received and calculated CRC values do not match, then the packet shall be discarded. If the values match then the packet is transferred. If the packet is transferred, then the CRC8 field shall be replaced with the SFD.

65.2 Extensions of the physical coding sublayer for data detection and forward error correction

65.2.1 Overview

This subclause extends the physical coding sublayer Clause 36 to support burst mode operation of the point-to-multipoint physical medium. This subclause also specifies an optional Forward Error Correction (FEC) mechanism to increase the optical link budget or the fiber distance. Figure 65–3 shows the relationship between the extended PCS sublayer and the ISO/IEC OSI reference model. Auto-Negotiation, as defined in Clause 37, establishes a point to point handshaking mechanism for allowing 1000BASE-X devices to achieve a highest common denominator link. The P2MP aspect of a 1000BASE-PX network prohibits the use of the auto-negotiation protocol.

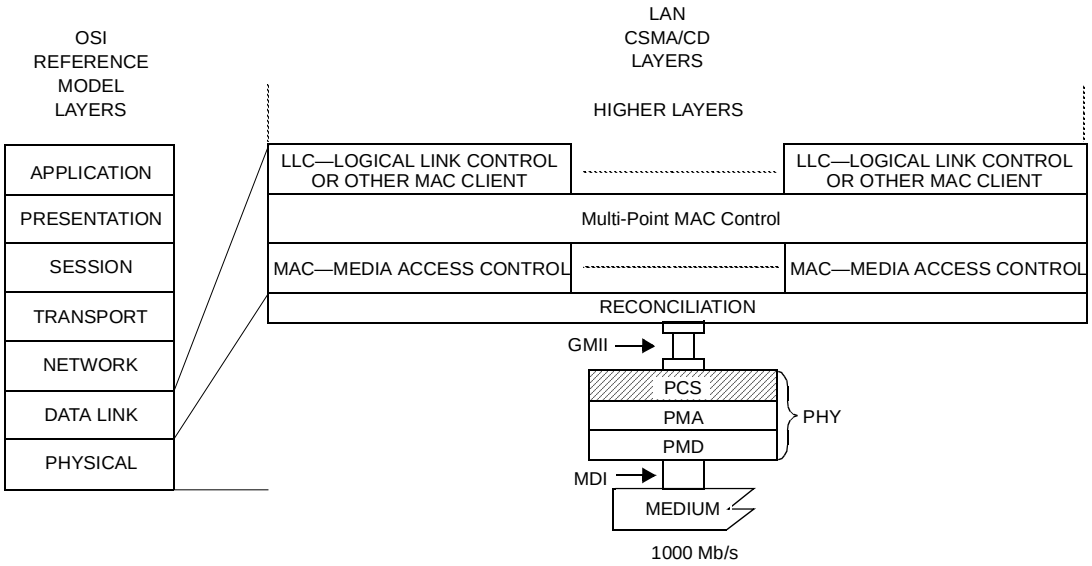


Figure 65–3—PCS location in the OSI protocol stack

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 527 of 717

65.2.2 Burst-mode operation

To avoid spontaneous emission noise from near ONUs obscuring signal from a distant ONU, the ONUs' lasers should be turned off between their transmissions. To control the laser, the PCS is extended to detect the presence of transmitted data and generate the PMD_SIGNAL.request(tx_enable) primitive to turn the laser on and off at the correct times. This function is performed by the Data Detector shown in the functional block diagram in Figure 65–4.

65.2.2.1 Principle of operation

The Data Detector contains a delay line (FIFO buffer) storing code-groups to be transmitted. The length of the FIFO buffer shall be chosen such that the delay introduced by the buffer together with any delay introduced by the PMA sublayer is long enough to turn the laser on and to allow a predefined number of idle characters to be transmitted. This number of idle characters is needed by the receiver to adjust its gain ($T_{receiver\_settling}$), synchronize its receiving clock (T_{cdr}), and complete the synchronization process (T_{sync}).

Upon initialization, the FIFO buffer is filled with /I/ ordered_sets and the laser is turned off. When the first code-group that is not /I/ arrives at the buffer, the Data Detector sets the PMD_SIGNAL.request(tx_enable) primitive to the value ON, instructing the PMD sublayer to start the process of turning the laser on (see Figure 65–4).

When the buffer empties of data (i.e., contains only /I/ ordered_sets), the Data Detector sets the PMD_SIGNAL.request(tx_enable) primitive to the value OFF, instructing the PMD sublayer to start the process of turning the laser off. Between packets, /I/ or /R/ ordered_sets will arrive at the buffer. If the number of these /I/ or /R/ ordered_sets is insufficient to fill the buffer then the laser is not turned off.

Figure 65–5 shows the relationship of filling the buffer and the generation of laser_control. In the OLT, the laser always remains turned on. Correspondingly, therefore the OLT's Data Detector does not need a delay line or buffer in the data path for this purpose.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 528 of 717

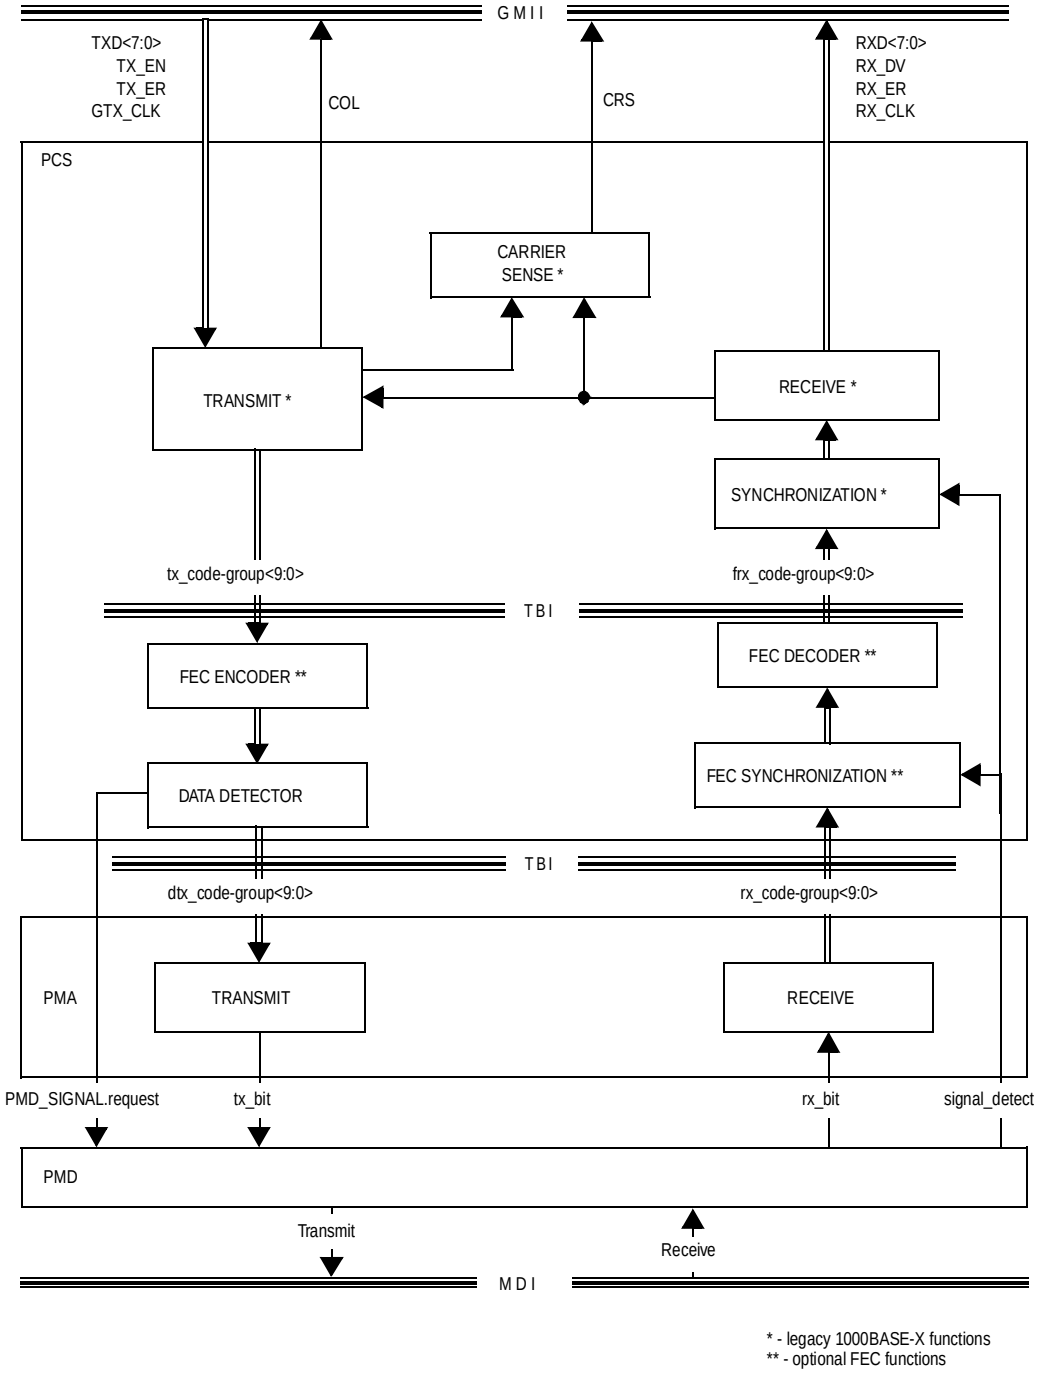


Figure 65–4—PCS Extension Functional block diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 529 of 717

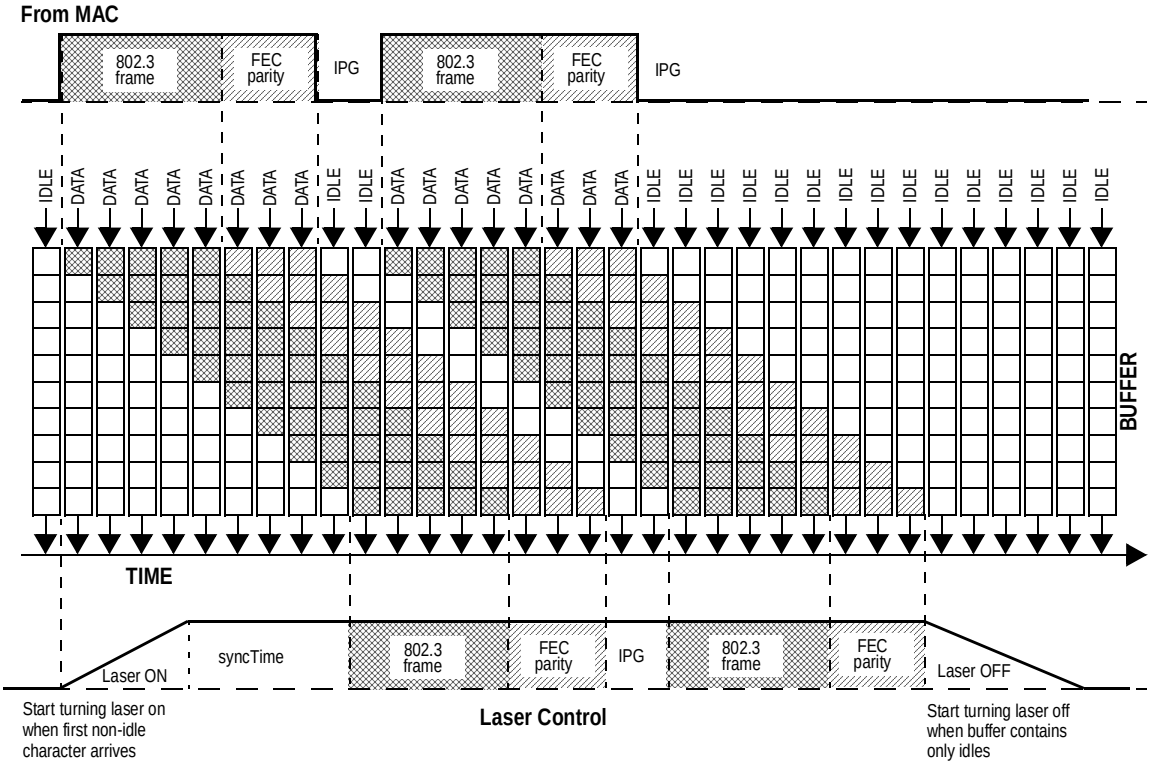


Figure 65–5—Laser control as a function of buffer fill

65.2.2.2 Detailed functions and state diagrams

The body of this clause comprises state diagrams, including the associated definitions of variables, constants, and functions. Should there be a discrepancy between a state diagram and descriptive text, the state diagram prevails. The notation used in the state diagrams in this clause follows the conventions in 21.5. State diagram variables follow the conventions of 21.5.2 except when the variable has a default value. Variables in a state diagram with default values evaluate to the variable default in each state where the variable value is not explicitly set.

65.2.2.2.1 Variables

BEGIN

TYPE: Boolean

This variable is used when initiating operation of the state machine. It is set to true following initialization and every reset.

DelayBound

TYPE: 16-bit unsigned

DEFAULT VALUE: 00-6A (106 code-groups = 848 ns)

This represents the delay sufficient to initiate the laser and to stabilize the receiver at the OLT. The default value of DelayBound is based on default values of laserOnTime (64.3.5.1) and SyncTime (64.3.3.2). This variable is only used by the ONU.

dtx_code-group

A 10-bit vector representing one code-group, as specified in Tables 36–1a through 36–2, which has been prepared for transmission by the Data Detector process. This vector is conveyed to

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 530 of 717

the PMA as the parameter of a PMA_UNITDATA.request(dtx_code-group) service primitive. The element dtx_code-group<0> is the first bit transmitted and dtx_code-group<9> is the last bit transmitted.

laser_control

This variable represents the status of the laser. The value on corresponds to the laser being turned on, and the value off corresponds to laser being off.

TYPE: boolean.

tx_code-group

A 10-bit vector of bits representing one code-group, as specified in Table 36-1a or Table 36-2, which has been prepared for transmission by the PCS Transmit process. The element tx_code-group<0> is the first tx_bit transmitted; tx_code-group<9> is the last tx_bit transmitted.

65.2.2.2.2 Functions

IsIdle(tx_code-group)

This function is used to determine whether tx_code-group is /T/, /R/, /K28.5/ or any code-group other than /D21.5/ or /D2.2/ that follows a /K28.5/.

FIFO.RemoveHead()

This function removes the first code-group from the FIFO buffer and advances all remaining code-groups one position ahead. This function returns the 10-bit vector representing the removed code-group.

FIFO.Append(tx_code-group)

This function appends a new 10-bit vector to the end of the FIFO buffer.

65.2.2.2.3 Messages

PMD_SIGNAL.request(tx_enable)

This primitive is used to turn the laser on and off at the PMD sublayer. In the OLT, this primitive shall always take the value ON. In the ONU, the value of this variable is controlled by the Data detector state diagram (see Figure 65–6).

PUDR

Alias for PMA_UNITDATA.request(tx_code-group<9:0>).

65.2.2.2.4 Counters

IdleLength

This counter represents the length of the consecutive interval of idles ending with the most recent tx_code-group. If the most recent tx_code-group represents a non-idle character, the IdleLength is reset to 0.

TYPE: 32-bit unsigned

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 531 of 717

65.2.2.3 State Diagrams

The Data Detector shall be implemented for an ONU as depicted in Figure 65–6, including compliance with the associated state variables as specified in 65.2.2.2.

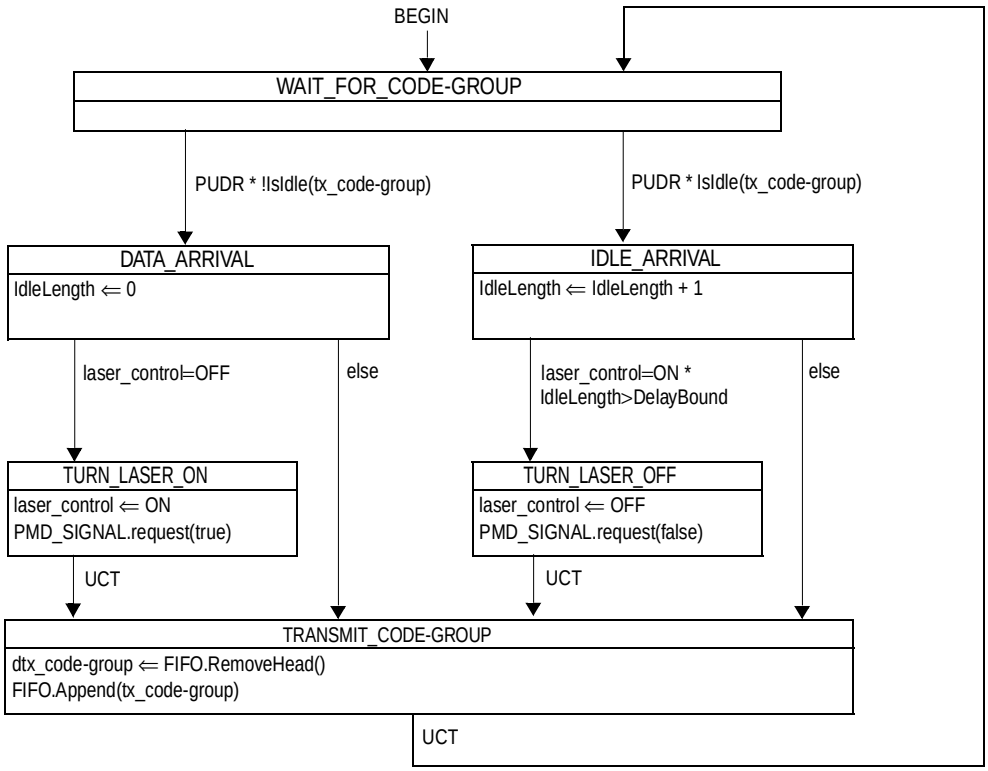


Figure 65–6—ONU data decoder state diagram

65.2.3 Forward error correction

This subclause specifies an optional Forward Error Correction (FEC) mechanism to increase the optical link budget or the fiber distance. The FEC appends to the Ethernet frame additional data that is a result of a set of non-binary arithmetic functions (known as Galois arithmetic) performed on the data of the Ethernet frame. This additional data (known as the FEC parity octets) is used to correct errors at the receiving end of the link that may occur when the data is transferred through the link.

The FEC function comprises three functional blocks: FEC Encoder, FEC Decoder, and FEC Synchronization, as shown in Figure 65–4. These blocks have Ten Bit Interface (TBI) to both sides and can be omitted for implementations not requiring FEC. Though the FEC functionality is optional, if implemented for operation over a multi-point optical link, it shall behave as specified in 65.2.3.

The following are the objectives of FEC:

a) Keep frame format compliant to 1000BASE-X PCS;
b) Support optional functionality;
c) Allow backwards compatibility with legacy 1000BASE-X devices;
d) Support BER objective of 10^{-12} at PCS;
e) Support BER objective of 10^{-4} at FEC sublayer.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 532 of 717

65.2.3.1 FEC code

The FEC code specification, properties and performance analysis are specified in the "ITU-T Recommendation G.975".

The FEC code used is a linear Cyclic Block code - the Reed-Solomon code (255, 239, 8) over the Galois Field of GF(2^8) - a non-binary code operating on 8-bit symbols. The code encodes 239 information symbols and adds 16 parity symbols. The code is systematic - meaning that the information symbols are not disturbed in any way in the encoder and the parity symbols are added separately to each block.

The code is the systematic form of the RS code based on the generating polynomial $G(x) = \prod_{i=0}^{15}(x - \alpha^i)$

where α is equal to 0x02 and is a root of the binary primitive polynomial $x^8+x^4+x^3+x^2+1$.

A code word of the systematic code is presented by D(x) + P(x) = G(x) * L(x) where:

D(x) is the data vector – $D(x)=D_{238}X^{254} + ... + D_0X^{16}$. D_{238} is the first data octet and D_0 is the last.

P(x) is the parity vector – $P(x)=P_{15}X^{15} + ... + P_0$. P_{15} is the first parity octet and P_0 is the last.

A data octet (d_7, d_6, ..., d_1, d_0) is identified with the element: $d_7*\alpha^7 + d_6*\alpha^6 + ... d_1*\alpha^1 + d_0$ in GF(2^8), the finite field with 2^8 elements. The code has a correction capability of up to eight symbols.

NOTE—The (255,239,8) Reed-Solomon code, the symbol size equals one octet. d_0 is identified as the LSB and d_7 is identified as the MSB bit in accordance with the conventions of 3.1.1.

The FEC decoder shall replace all octets in an uncorrectable block with /V/ to clearly propagate the error condition to the PCS.

65.2.3.2 FEC frame format

The frame format of an FEC coded Ethernet frame is herein described.

65.2.3.2.1 Placing parity octets

Ethernet packets are received from the PCS. The data is partitioned into 239-symbol frames (blocks), with the first block beginning with the first symbol after the /S/ code-group and the last block ending with the last symbol before the /T/ code-group. Each block is encoded using the (255, 239 ,8) Reed-Solomon encoder, which results in an additional 16 parity symbols for each block. The block plus the associated 16 parity symbols form the 255 symbol Reed Solomon codeword. The additional 16 parity symbols, which are generated from this encoding process for each block, are gathered and added at the end of the packet.

65.2.3.2.2 Shortened last block

When dividing the data into blocks there might be a case where the last block is shorter than 239 symbols. This block is noted as a shortened block. A shortened block of length r octets results in the data vector assignment of D_{238} to D_r as zeros and D_{r-1} to D_0 as valid data, where D_{r-1} is the first octet of the shortened block and D_0 is the last. This full size block is then encoded and the 16 parity symbols are generated. The data is then sent without the zero symbols. At the receiver, the decoder completes the block again into the full block (by adding back the zeroes) for decoding.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 533 of 717

65.2.3.2.3 Special frame markers

The Ethernet frame consists of a number of blocks plus special frame start and stop markers. In order to decode the FEC code, the receiver must first synchronize on the Ethernet frame. The Ethernet frame markers are not protected by the FEC code and are exposed to higher BER. Therefore, special start and stop marker symbols are added at the beginning and the end of the FEC coded frame that are capable of being correctly detected in a high noise environment. The special symbol noise immunity is made possible by the implementation of a simple correlator. The marker framing sequences used are at least 5 octets long, long enough to be detected with very high probability. The start FEC framing sequence is denoted by /S_FEC/ and the end FEC framing sequence is denoted by /T_FEC/.

In order to determine that an FEC coded frame has started, the input symbol stream is scanned for a match with the /S_FEC/ ordered_set with fewer than d/2 errors. In order to determine that an FEC coded frame has ended, the input symbol stream is scanned for a match with the /T_FEC_O/ or /T_FEC_E/ ordered_sets with fewer than d/2 errors.

The value chosen for d is 10, the number of bits that are different between these ordered_sets and any other regularly occurring 5 consecutive code-groups when considered in the 10-bit domain.

The sequence can flow through non-FEC PCS transparently (in a False_Carrier_Sense mode).

The start and end symbols are constructed from 8B/10B code-groups:

— /S_FEC/ - start of FEC coded packet - /K28.5/D6.4/K28.5/D6.4/S/
— /T_FEC_E/ - end of FEC coded packet with even alignment - /T/R/I/T/R/
— /T_FEC_O/ - end of FEC coded packet with odd alignment - /T/R/R/I/T/R/

/S/, /T/, /R/ and /I/ are described in Table 36-3. The /I/ in both the /T_FEC_E/ and the /T_FEC_O/ ordered_sets can be either an /I1/ (a disparity correcting IDLE) or an /I2/ (a disparity preserving IDLE).

Figure 65–7 describes the FEC coded Ethernet frame. Between the FCS and PARITY fields, the T_FEC can be either the /T_FEC_E/ or the /T_FEC_O/ ordered_set. After the PARITY field, the T_FEC can only be a /T_FEC_E/ ordered_set.



Figure 65–7—FEC coded Ethernet Frame

65.2.3.3 FEC sublayer operation

This section describes the functionality and operation of the FEC sublayer.

65.2.3.3.1 Principles of operation

At transmission, the FEC sublayer receives the packets from the PCS, performs the FEC coding, appends the parity octets in place of the stretched IPG and sends the data to the PMA. At reception, the FEC sublayer receives the data from the PMA, performs the octet alignment, detects the Start FEC Framing Sequence, decodes the FEC code, correcting data where necessary and possible, replaces the parity octets with IDLE and sends the data to the PCS.

NOTE—To ensure correct MPCP operation, FEC function must maintain constant and equal delay for all code-groups and all signals transmitted from PMA to PCS. Timing effects of adding FEC function should be indistinguishable from an increased propagation delay.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 534 of 717

65.2.3.3.2 Functional block diagram

As depicted in Figure 65–4, the FEC sublayer comprises a transmit side and a receive side. The following sections define the functionality of each block in the sublayer. See 36.3.3 for a complete description of the TBI.

65.2.3.3.3 Transmission

Figure 65–8 describes a block diagram of the FEC sublayer transmit data path. The packet delimiters of the packets from the PCS are detected. The /I/I/S/ is replaced with the /S_FEC/ ordered_set. The data in the frame is then 8B/10B decoded so that the FEC coding can take place and the parity octets buffered. The /T/R/I/I/ or /T/R/R/I/I/ is detected and replaced with the /T_FEC_E/ or /T_FEC_O/, respectively. Then the parity octets and another /T_FEC_E/ is appended, replacing the stretched interframe spacing.

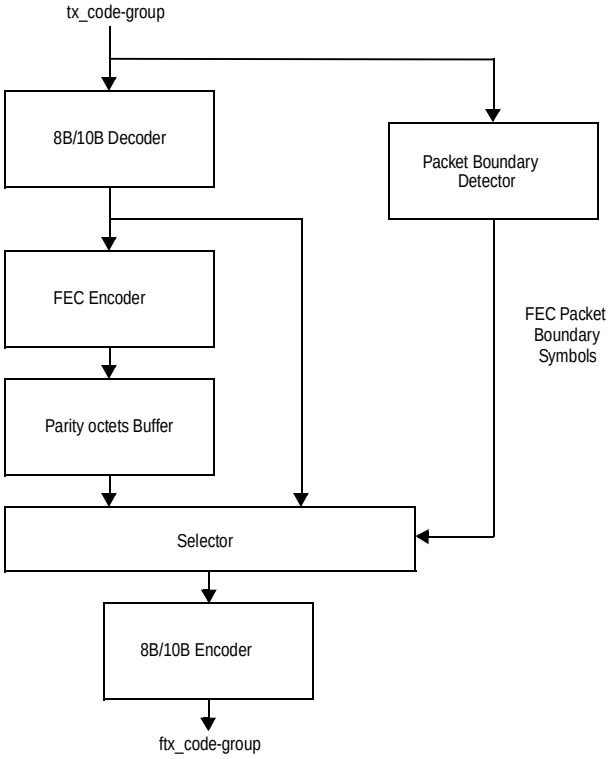


Figure 65–8—Transmit block diagram

The FEC Transmit process continually generates code-groups based upon information provided in the PMA_UNITDATA.request primitive with the tx_code-group<9:0> parameter, sending them immediately to the PMA Service Interface via the same primitive with the ftx_code-group<9:0> parameter.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 535 of 717

65.2.3.3.4 Reception

Figure 65–9 describes the receive synchronization block diagram of the FEC sublayer receive data path. The FEC Synchronization process continually accepts code-groups via the PMA_UNITDATA.indicate service primitive and conveys received code-groups to the FEC Receive process via the SYNC_UNITDATA.indicate service primitive. The FEC Synchronization process sets the sync_status flag to indicate whether the PMA is functioning dependably (as well as can be determined without exhaustive error-rate analysis).

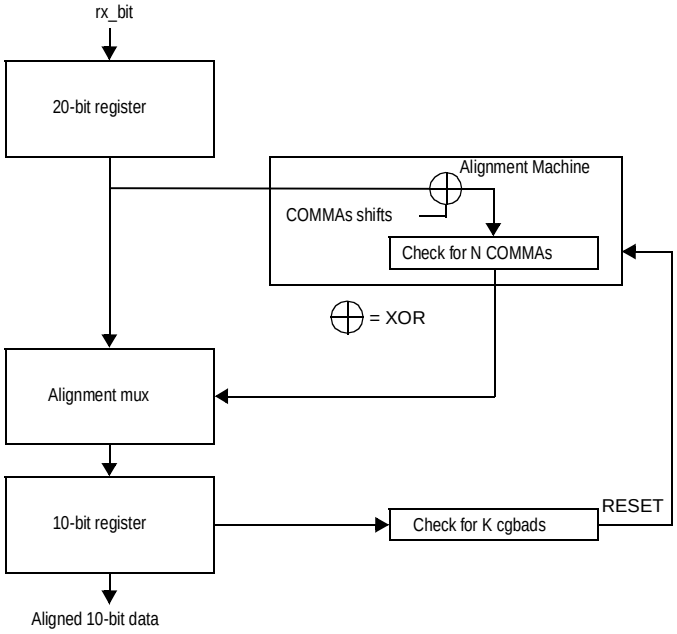


Figure 65–9—Receive synchronization block diagram

Figure 65–10 describes a block diagram of the FEC sublayer receive data path. The FEC Receive process continuously accepts code-groups via the SYNC_UNITDATA.indicate service primitive. It fills a buffer with these code-groups, converting an /S_FEC/ with fewer than d/2 errors to /I/I/S/ and converting all /T_FEC/ with fewer than d/2 errors to a clean /T_FEC/. This buffer exists in order to store all necessary data until the parity octets are available for performing data correction. Data correction is performed within the buffer. While emptying the buffer, the parity octets, along with the latter /T/R/ of the first /T_FEC/ and the entire second /T_FEC/ are converted to /I/.

NOTE—Under specific conditions, the PCS may generate a large number of FALSE_CARRIER events. FEC encryption only protects Ethernet frames. The IDLEs are not FEC-protected. During idle periods, excessive bit errors may results in FALSE_CARRIER events. Additionally, when FEC and non-FEC devices are combined in the same EPON, a non-FEC device will treat FEC parity data as FALSE_CARRIER events.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 536 of 717

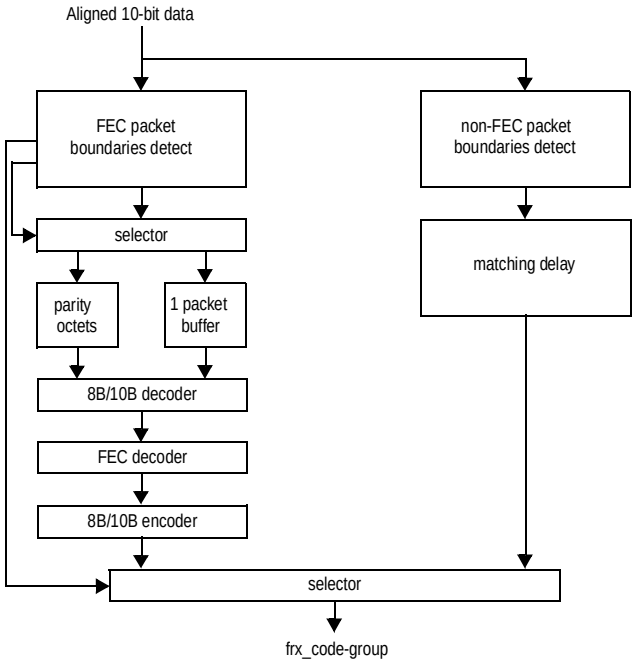


Figure 65–10—Receive data block diagram

65.2.3.4 Detailed functions and state diagrams

The body of this clause comprises state diagrams, including the associated definitions of variables, constants, and functions. Should there be a discrepancy between a state diagram and descriptive text, the state diagram prevails. The notation used in the state diagrams in this clause follows the conventions in 21.5. State diagram variables follow the conventions of 21.5.2 except when the variable has a default value. Variables in a state diagram with default values evaluate to the variable default in each state where the variable value is not explicitly set.

65.2.3.4.1 State variables

65.2.3.4.2 Notation Conventions

/x/

Denotes the constant code-group specified in 36.2.5.1.2 (valid code-groups must follow the rules of running disparity as per 36.2.4.5 and 36.2.4.6).

[/x/]

Denotes the latched received value of the constant code-group (/x/) specified in 36.2.5.1.2 and conveyed by the SYNC_UNITDATA.indicate message described in 36.2.5.1.6.

65.2.3.4.3 Constants

/COMMA/

The set of special code-groups which include a comma as specified in 36.2.4.9 and listed in Table 36-2.

/D/

The set of 256 code-groups corresponding to valid data, as specified in 36.2.4.11.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 537 of 717

/Dx.y/
One of the set of 256 code-groups corresponding to valid data, as specified in 36.2.4.11.

/I/
The IDLE ordered_set group, comprising either the /I1/ or /I2/ ordered_sets, as specified in 36.2.4.12.

/INVALID/
The set of invalid data or special code-groups, as specified in 36.2.4.6.

/Kx.y/
One of the set of 12 code-groups corresponding to valid special code-groups, as specified in Table 36-2.

/R/
The code-group used as either: End_of_Packet delimiter part 2; End_of_Packet delimiter part 3; Carrier_Extend; and /I/ alignment.

/S/
The code-group corresponding to the Start_of_Packet delimiter (SPD) as specified in 36.2.4.13.

/T/
The code-group used for the End_of_Packet delimiter part 1.

/V/
The Error_Propagation code-group, as specified in 36.2.4.16.

65.2.3.4.4 Variables

buffer
The Receive process buffer of undefined length containing code-groups.

buffer_head
The code-group at the head of the Receive process buffer.

cgbad
Alias for the following terms: ((rx_code-group∈ /INVALID/) + (rx_code-group=/COMMA/ *rx_even=TRUE)) * PMA_UNITDATA.indicate

cggood
Alias for the following terms: !((rx_code-group∈ /INVALID/) + (rx_code-group=/COMMA/ *rx_even=TRUE)) * PMA_UNITDATA.indicate

fec_encode
A boolean set by the FEC Transmit process to indicate the status of the RS_Encode(Data) function.

Values: TRUE; data is acted upon by the RS_Encode(Data) function.
FALSE; data is not being acted upon by the RS_Encode(Data) function.

ftx_bit
A binary parameter used to convey data from the PMA to the PMD via the PMD_UNITDATA.request service primitive as specified in 60.1.5.1.

Values: ZERO; Data bit is a logical zero.
ONE; Data bit is a logical one.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 538 of 717

ftx_code-group<9:0>

A vector of bits representing one code-group, as specified in Tables 36–1a through 36–2, which has been prepared for transmission by the FEC Transmit process. This vector is conveyed to the PMA as the parameter of a PMA_UNITDATA.request(ftx_code-group) service primitive. The element ftx_code-group<0> is the first ftx_bit transmitted; ftx_code-group<9> is the last ftx_bit transmitted.

parity<D7:D0>

An 8-bit array that contains the current parity bits to be encoded in the FEC Transmit Process. The elements within the array are updated with the next 8-bits to be encoded upon each entry into the XMIT_PARITY state.

Values for each element in the array: ZERO; Data bit is a logical zero.
ONE; Data bit is a logical one.

parity_buffer_empty

A boolean set by the FEC Transmit process to indicate if more parity octets need to be encoded.

Values: TRUE; No more parity octets need to be encoded.
FALSE; More parity octets need to be encoded.

rx_disparity

A boolean set by the FEC Receive process to indicate the running disparity at the end of code-group reception as a binary value. Running disparity is described in 36.2.4.3.

Values: POSITIVE
NEGATIVE

rx_even

A boolean set by the FEC Synchronization process to designate received code-groups as either even- or odd-numbered code-groups as specified in 36.2.4.2.

Values: TRUE; Even-numbered code-group being received.
FALSE; Odd-numbered code-group being received.

rx_code-group<9:0>

A 10-bit vector represented by the most recently received code-group from the PMA. The element rx_code-group<0> is the least recently received (oldest) rx_bit; rx_code-group<9> is the most recently received rx_bit (newest). When code-group alignment has been achieved, this vector contains precisely one code-group.

signal_detect

A boolean set by the PMD continuously via the PMD_SIGNAL.indicate(signal_detect) message to indicate the status of the incoming link signal.

Values: FAIL; A signal is not present on the link.
OK; A signal is present on the link.

sync_status

A parameter set by the FEC Synchronization process to reflect the status of the link as viewed by the receiver.

Values: FAIL; The receiver is not synchronized to code-group boundaries.
OK; The receiver is synchronized to code-group boundaries.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 539 of 717

tx_bit

A binary parameter used to convey data from the PMA to the PMD via the PMD_UNITDATA.request service primitive as specified in 60.1.5.1.

Values: ZERO; Data bit is a logical zero.
ONE; Data bit is a logical one.

tx_code-group<9:0>

A vector of bits representing one code-group, as specified in Tables 36-1a or 36-2, which has been prepared for transmission by the PCS Transmit process. This vector is conveyed to the PMA as the parameter of a PMD_UNITDATA.request(tx_bit) service primitive. The element tx_code-group<0> is the first tx_bit transmitted; tx_code-group<9> is the last tx_bit transmitted.

tx_disparity

A boolean set by the FEC Transmit process to indicate the running disparity at the end of code-group transmission as a binary value. Running disparity is described in 36.2.4.3.

Values: POSITIVE
NEGATIVE

65.2.3.4.5 Functions

check_ahead_tx

Prescient function used by the FEC Transmit process to find the Start_of_Packet in order to replace the Start_of_Packet and its two preceding IDLE ordered_sets with /S_FEC/.

check_ahead_rx

Prescient function used by the FEC Receive process to find the /S_FEC/ and /T_FEC/, with fewer than d/2 errors.

DECODE ([/x/])

In the PCS Receive process, this function takes as its argument the latched value of rx_code-group<9:0> ([/x/]) and the current running disparity, and returns the corresponding GMII RXD<7:0>, rx_Config_Reg<D7:D0>, or rx_Config_Reg<D15:D8> octet, per Table 36-1a–e. DECODE also updates the current running disparity per the running disparity rules outlined in 36.2.4.4.

ENCODE(x)

In the PCS Transmit process, this function takes as its argument (x), where x is a GMII TXD<7:0>, tx_Config_Reg<D7:D0>, or tx_Config_Reg<D15:D8> octet, and the current running disparity, and returns the corresponding ten-bit code-group per Table 36-1a. ENCODE also updates the current running disparity per Table 36-1a–e.

POP_BUFFER

Removes the octet at the head of the Receive process buffer, making the next octet available.

RS_Encode(Data)

This function is used to encode the Reed Solomon (255, 239, 8) code. The encoder encodes the 239 octets data frame and generates 16 parity octets for each data frame. Before being passed to the Reed Solomon encoder, this function passes the data through DECODE([/x/]).

RS_Decode(Data)

This function is used to decode the Reed Solomon (255, 239, 8) code. The decoder decodes the 255 symbols data frame and generates 239 corrected data octets for each frame and an error signal.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 540 of 717

signal_detectCHANGE
: In the PCS Synchronization process, this function monitors the signal_detect variable for a state change. The function is set upon state change detection.

  Values: TRUE; A signal_detect variable state change has been detected.
  FALSE; A signal_detect variable state change has not been detected (default).

65.2.3.4.6 Counters

good_cgs
: Count of consecutive valid code-groups received.

loop_count
: A 3-bit counter used to keep track of the number of loops in the receive synchronization process.

65.2.3.4.7 Messages

FEC_UNITDATA.indicate(frx_code-group<9:0>)
: A signal sent by the FEC Receive process conveying the next code-group received over the medium.

FUDI
: Alias for FEC_UNITDATA.indicate(frx_code-group<9:0>).

PMA_UNITDATA.indicate(rx_code-group<9:0>)
: A signal sent by the PMA Receive process conveying the next code-group received over the medium (see 36.3.1.2).

PMA_UNITDATA.request(tx_code-group<9:0>)
: A signal sent to the PMA or FEC Transmit process conveying the next code-group ready for transmission over the medium (see 36.3.1.1).

PUDI
: Alias for PMA_UNITDATA.indicate(rx_code-group<9:0>).

PUDR
: Alias for PMA_UNITDATA.request(tx_code-group<9:0>).

SUDI
: Alias for SYNC_UNITDATA.indicate(parameters).

SYNC_UNITDATA.indicate(parameters)
: A signal sent by the FEC Synchronization process to the FEC Receive process conveying the following parameters:

  Parameters: [/x/]; the latched value of the indicated code-group (/x/);
  EVEN/ODD; The latched state of the rx_even variable;

  Value: EVEN; Passed when the latched state of rx_even=TRUE.
  ODD; Passed when the latched state of rx_even=FALSE.

65.2.3.5 State diagrams

65.2.3.5.1 Transmit state diagram

The FEC shall implement its transmit process as depicted in Figure 65–11, including compliance with the associated state variables as specified in 65.2.3.4.1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 541 of 717

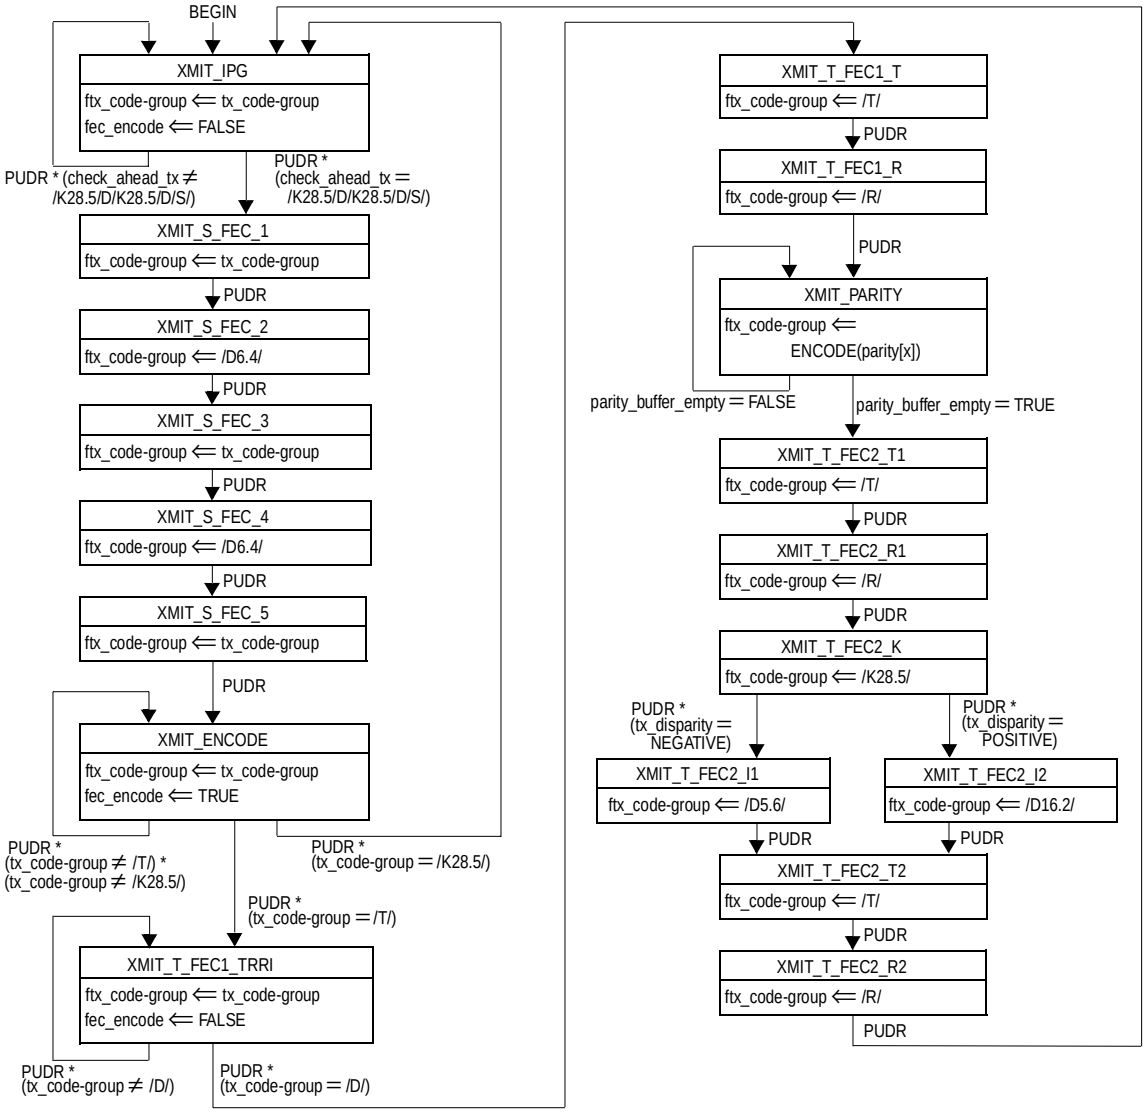


Figure 65–11—Transmit state diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 542 of 717

65.2.3.5.2 Receive synchronization state diagram

The FEC shall implement its synchronization process as depicted in Figure 65–12, including compliance with the associated state variables in 65.2.3.4.1.

65.2.3.5.3 Receive state diagram

The FEC shall implement its receive process as depicted in Figure 65–13 and Figure 65–14, including compliance with the associated state variables in 65.2.3.4.1.

It is expected that the FEC decoding is performed while the data is in the buffer.

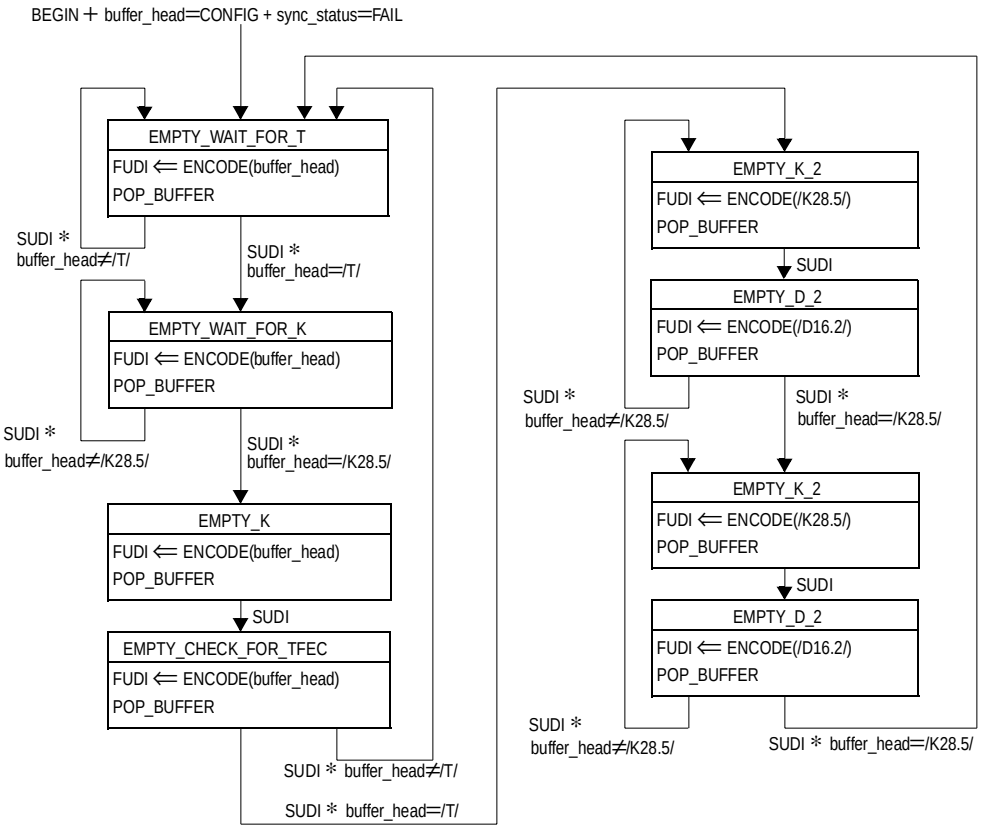


Figure 65–14—Receive buffer-empty state diagram

65.2.3.6 Error monitoring capability

The following counters apply to FEC sublayer management and error monitoring. If an MDIO interface is provided (see Clause 22), it is accessed via that interface. If not, it is recommended that an equivalent access be provided. These counters are reset to zero upon read or upon reset of the FEC sublayer. When a counter reaches all ones, it stops counting. The counters' purpose is to help monitor the quality of the link.

65.2.3.6.1 buffer_head_coding_violation_counter

32-bit counter. buffer_head_coding_violation_counter counts once for each invalid code-group received directly from the link. This variable is provided by a management interface that may be mapped to the 45.2.7.4 register (29.9.15:0).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 543 of 717

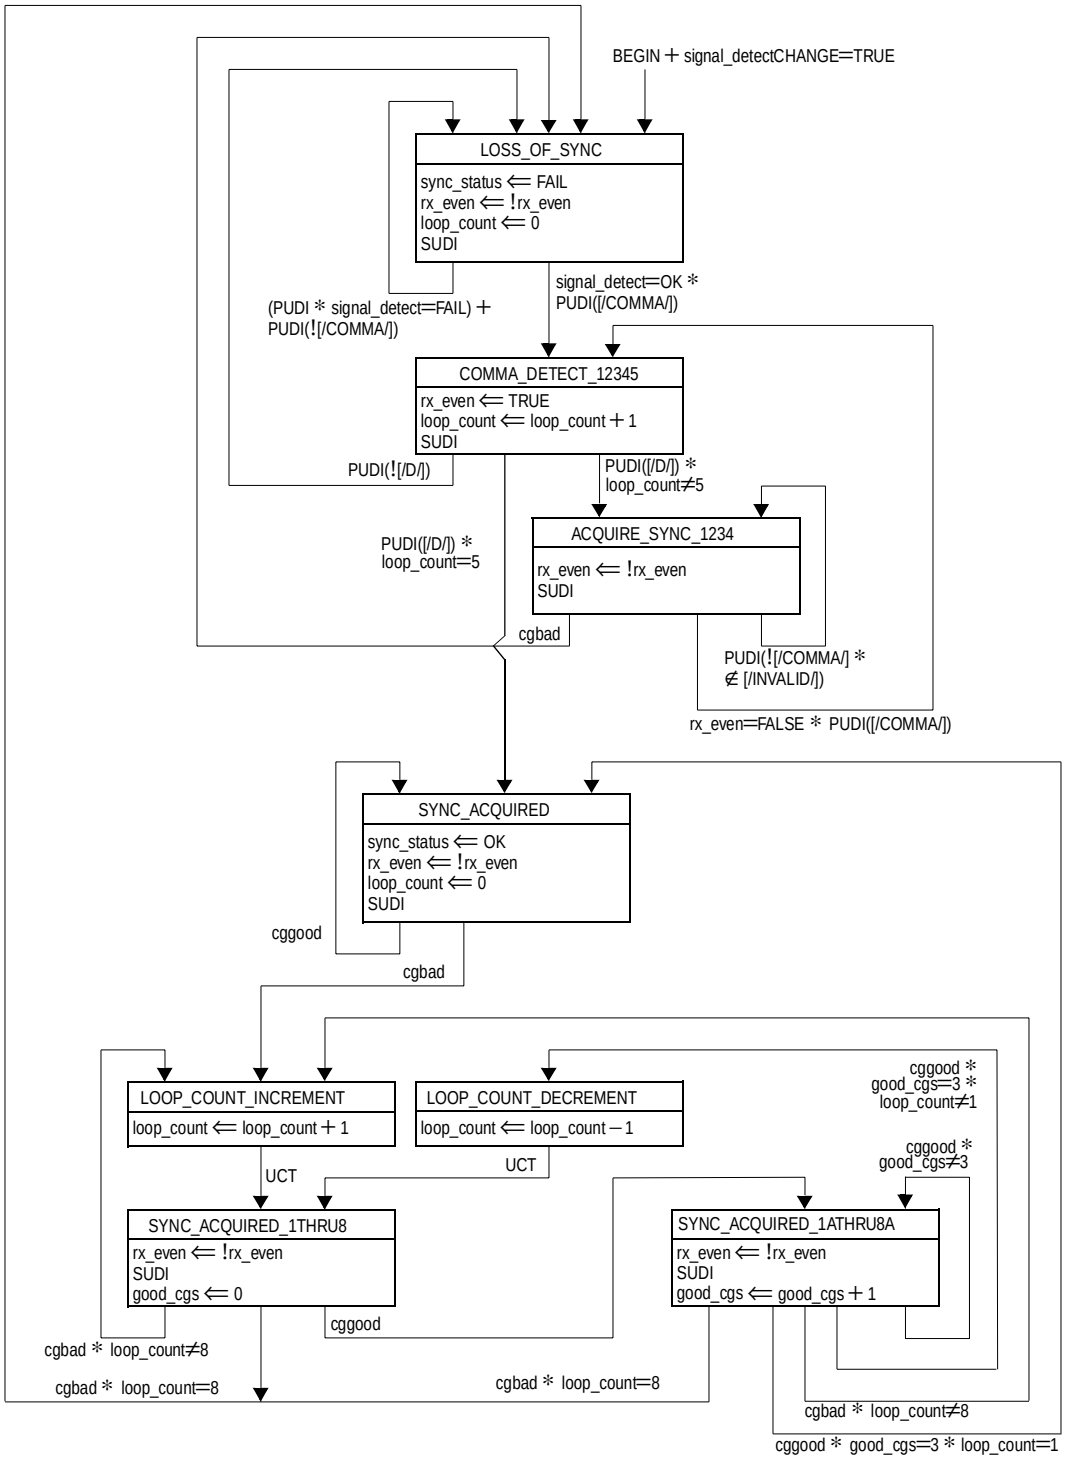


Figure 65–12—Receive synchronization state diagram

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 544 of 717

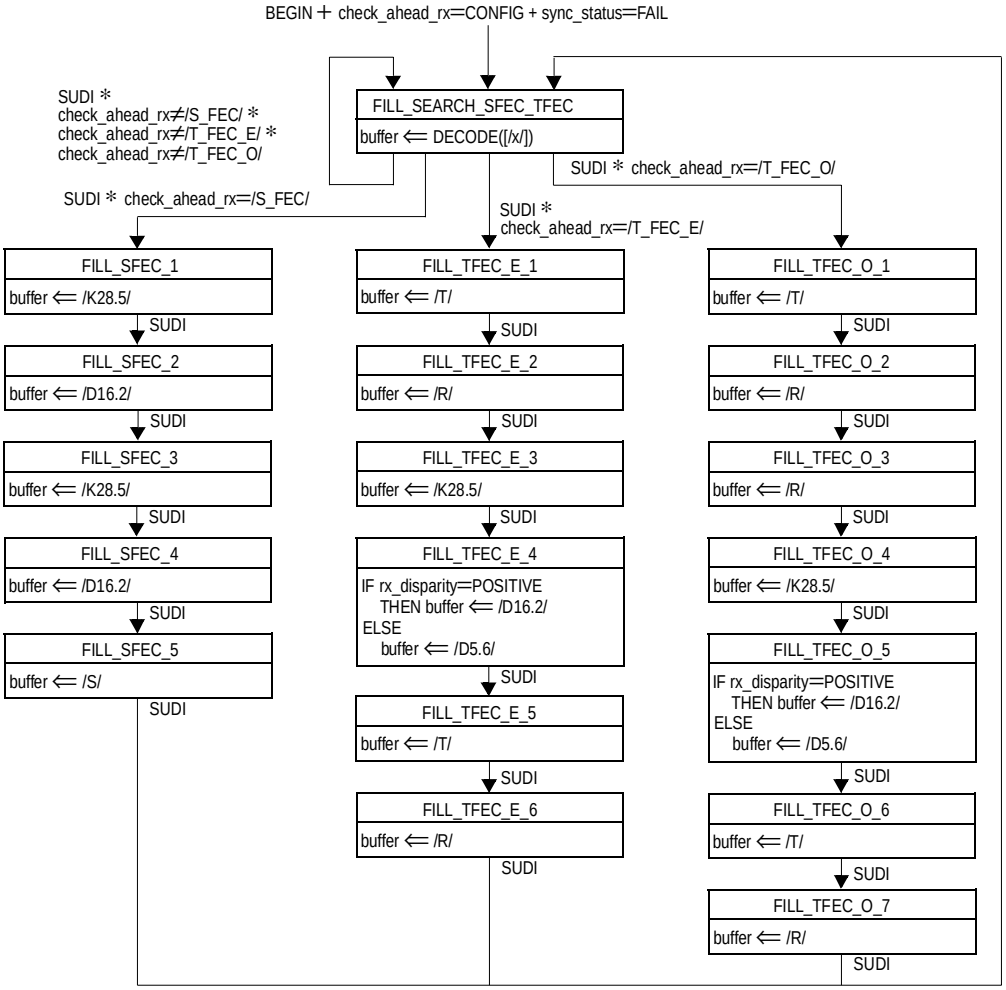


Figure 65–13—Receive buffer-fill state diagram

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 545 of 717

65.2.3.6.2 FEC_corrected_blocks_counter

32-bit counter. FEC_corrected_blocks_counter counts once for each corrected FEC blocks in the decoding. This variables is provided by a management interface that may be mapped to the 45.2.7.5 register (29.10.15:0).

65.2.3.6.3 FEC_uncorrected_Blocks_counter

32-bit counter. FEC_uncorrected_blocks_counter counts once for each uncorrected FEC blocks in the decoding. This variables is provided by a management interface that may be mapped to the 45.2.7.6 register (29.11.15:0).

65.3 Extensions to PMA for 1000BASE-PX

In addition to the requirements defined in Clause 36, P2MP operation imposes the following requirement on the PMA sublayer of the OLT and ONU.

65.3.1 Extensions for 1000BASE-PX-U

65.3.1.1 Physical Medium Attachment (PMA) sublayer interfaces

In addition to the primitives of Clause 36, the following primitive is defined:

PMD_SIGNAL.request(tx_enable)

This primitive controls PMD emission of light. It is generated by the PCS's data detector (see 65.2.2.2.3) and the effect of its receipt is defined in 60.1.5.3. This primitive is received from the PCS and passed in timely fashion and without modification to the PMD. It takes the following parameter:

tx_enable The tx_enable parameter can take one of two values, ON or OFF.

65.3.1.2 Loop-timing specifications for ONUs

ONUs shall operate at the same time basis as the OLT, i.e., the ONU TX clock tracks the ONU RX clock. Jitter transfer masks are defined in 60.6.

65.3.2 Extensions for 1000BASE-PX-D

65.3.2.1 CDR lock timing measurement

A PMA instantiated in an OLT becomes synchronized at the bit level within 400 ns (T_{cdr}) and code-group level within an additional 32 ns ($T_{code\_group\_alignment}$) of the appearance of a valid 1000BASE-X IDLE pattern at TP4 when the PMA_TX_CLK frequency is equal to twice the PMA_RX_CLK frequency.

65.3.2.1.1 Definitions

CDR Lock Time (denoted T_{CDR}) is defined as a time interval required by the receiver to acquire phase and frequency lock on the incoming data stream. T_{CDR} is measured as the time elapsed from the moment when electrical signal after the PMD at TP4 reaches the conditions specified in 60.7.13.2.1 for receiver settling time to the moment when the phase and frequency are recovered and jitter is maintained for a network with BER of no more than 10^{-12} for non-FEC systems, or no more than 10^{-4} for FEC enabled systems.

The combined value of measured T_{CDR} and $T_{code\_group\_alignment}$ shall not exceed 432 ns.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 546 of 717

65.3.2.1.2 Test specification

Figure 60–2 illustrates the tests setup for the OLT PMA receiver (upstream) T_{CDR} time. The test assumes that there is an optical PMD transmitter at the ONU with well known parameters, having a fixed known T_{On} time as defined in 60.7.13.1, and an optical PMD receiver at the OLT with well-known parameters, having a fixed known $T_{Receiver\_settling}$ time as defined in 60.7.13.2. After $T_{On} + T_{Receiver\_settling}$ time the parameters at TP4 reach within 15% of their steady state values.

Measure T_{CDR} as the time from the TX_ENABLE assertion, minus the known $T_{On} + T_{Receiver\_settling}$ time, to the time the electrical signal at the output of the PMA reaches up to phase difference from the input signal of the transmitting PMA, assuring BER of 10^{-12} for non-FEC systems, or BER of 10^{-4} for FEC enabled systems, and maintaining its jitter specifications. The signal throughout this test, is the 1000BASE-X IDLE pattern.

A non-rigorous way to describe this test setup would be (using a transmitter PMD at the ONU, with a known T_{On} time and a receiver PMD at the OLT, with a known $T_{Receiver\_settling}$ time):

For a tested PMA receiver with a declared T_{CDR} time, measure the phase and jitter of the recovered PMA receiver signal after T_{CDR} time from the TX_ENABLE trigger minus the reference $T_{On} + T_{Receiver\_settling}$ time, reassuring synchronization to the ONU PMA input signal and conformance to the specified steady state phase, frequency, and jitter values for BER of 10^{-12} for non-FEC systems, or BER of 10^{-4} for FEC enabled systems.

65.3.3 Delay variation requirements

The MPCP relies on strict timing based on the distribution of timestamps. The actual delay is implementation dependent but an implementation shall maintain a combined delay variation through RS, PCS, and PMA sublayers of no more than 16 bit times so as to comply with this mechanism.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 547 of 717

65.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 65, Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction[22]

65.4.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 65, Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

65.4.2 Identification

65.4.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Names(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

65.4.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Extensions of the Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004)	
Date of Statement	

[22]Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 548 of 717

65.4.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
*OLT	OLT Functionality	65.1.1	Device supports functionality required for OLT	O.1	Yes [ ] No [ ]
*ONU	ONU Functionality	65.1.1	Device supports functionailty required for ONU	O.1	Yes [ ] No [ ]
*FEC	Forward Error Correction for Multipoint Optical Links	65.2.3	Device supports FEC for Multipoint Optical Links	O	Yes [ ] No [ ]

65.4.4 PICS proforma tables for Extensions of Reconciliation Sublayer (RS) and Physical Coding Sublayer (PCS) / Physical Media Attachment (PMA) for 1000BASE-X for Multi-Point Links and Forward Error Correction.

65.4.4.1 Operating modes of OLT MACs

Item	Feature	Subclause	Value/Comment	Status	Support
OM1	Unidirectional mode	65.1.2	Device operates in unidirectional transmission mode	OLT:M	Yes [ ]

65.4.4.2 ONU and OLT variables

Item	Feature	Subclause	Value/Comment	Status	Support
FS1	enable variable	65.1.3.1	True for ONU MAC, TRUE for OLT MAC if enabled, FALSE for OLT MAC if not enabled	M	Yes [ ]
FS2	mode variable	65.1.3.1	0 for ONU MAC, 0 or 1 for enabled OLT MAC	M	Yes [ ]
FS3	logical_link_id variable	65.1.3.1	Set to 0x7FFF until ONU MAC is registered Set to any value for enabled OLT MAC. Set to any value other then 0x7FFF for registered ONU MAC	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 549 of 717

65.4.4.3 Preamble mapping and replacement

Item	Feature	Subclause	Value/Comment	Status	Support
PM1	CRC-8 generation	65.1.3.2.3	CRC calculation produces same result as serial implementation	M	Yes [ ] No [ ]
PM2	CRC-8 initial value	65.1.3.2.3	CRC shift register initialized to 0x00 before each new calculations	M	Yes [ ] No [ ]
PM3	SLD parsing	65.1.3.3.1	If SLD is not found then discard packet	M	Yes [ ] No[ ]
PM4	SLD replacement	65.1.3.3.1	Replace SLD with preamble	M	Yes [ ] No [ ]
PM5	LLID matching	65.1.3.3.2	If LLID does not match then discard packet	M	Yes [ ] No [ ]
PM6	LLID Replacement	65.1.3.3.2	Replace LLID with preamble	M	Yes [ ] No [ ]
PM7	CRC-8 checking	65.1.3.3.3	If CRC does not match then discard packet	M	Yes [ ] No [ ]
PM8	CRC-8 replacement	65.1.3.3.3	Replace CRC with preamble	M	Yes [ ] No [ ]

65.4.4.4 Data detection

Item	Feature	Subclause	Value/Comment	Status	Support
DD1	Buffer depth	65.2.2.1	Depth sufficient to turn on laser and settle receiver	ONU:M	Yes [ ] No [ ]
DD2	OLT laser control	65.2.2.2.3	Always takes the value ON	OLT:M	Yes [ ] No [ ]
DD3	State diagrams	65.2.2.3	Meets the requirements of Figure 65–6	ONU:M	Yes [ ] No[ ]

65.4.4.5 FEC requirements

Item	Feature	Subclause	Value/Comment	Status	Support
FE1	FEC Coding Choice	65.2.3	If FEC is used, it is this one	FEC:M	Yes [ ] No [ ]
FE2	Uncorrectable block replacement	65.2.3.1	Replace all code-groups in an uncorrectable block with /V/	FEC:M	Yes [ ] No [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 550 of 717

65.4.4.6 FEC state machines

Item	Feature	Subclause	Value/Comment	Status	Support
SM1	Transmit	65.2.3.5.1	Meets the requirements of Figure 65–11	FEC:M	Yes [ ]
SM2	Receive synchronization	65.2.3.5.2	Meets the requirements of Figure 65–12	FEC:M	Yes [ ]
SM3	Receive	65.2.3.5.3	Meets the requirements of Figure 65–13 for buffer fill and Figure 65–14 for buffer empty	FEC:M	Yes [ ]

65.4.4.7 PMA

Item	Feature	Subclause	Value/Comment	Status	Support
BMC1	Loop Timing	65.3.1.2	ONU RX clock tracks OLT TX clock	ONU:M	Yes [ ] No [ ]

65.4.4.8 Delay variation

Item	Feature	Subclause	Value/Comment	Status	Support
DV1	Delay variation	65.3.3	Combined delay variation through RS, PCS, and PMA sublayers is limited to 16 bit times	M	Yes [ ] No [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 551 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 552 of 717

66. Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport

In the absence of unidirectional operation, the sublayers in this clause are precisely the same as their equivalents in Clause 24, Clause 36, and Clause 46. Otherwise, this clause describes additions and modifications to the 100BASE-X, 1000BASE-X, 10GBASE-R, 10GBASE-W and 10GBASE-X physical layers, making them capable of unidirectional operation, which is required to initialize a 1000BASE-PX network, and allows the transmission of Operations, Administration and Management (OAM) frames regardless of whether the PHY has determined that a valid link has been established.

However, unidirectional operation may only be enabled under very limited circumstances. Before enabling this mode, the MAC shall be operating in full-duplex mode and Auto-Negotiation, if applicable, shall be disabled. In addition, the OAM sublayer above the MAC (see Clause 57) shall be present and enabled or (for 1000BASE-X), the PCS shall be part of a 1000BASE-PX-D PHY (see Clause 60 and Clause 64). Unidirectional operation shall not be invoked for a PCS that is part of a 1000BASE-PX-U PHY (except for out-of-service test purposes or where the PON contains just one ONU). Failure to follow these restrictions results in an incompatibility with the assumptions of 802.1 protocols, a PON that cannot initialize, or collisions, which are unacceptable in the P2MP protocol.

66.1 Modifications to the physical coding sublayer (PCS) and physical medium attachment (PMA) sublayer, type 100BASE-X

66.1.1 Overview

This subclause specifies the 100BASE-X PCS and PMA for support of subscriber access networks.

66.1.2 Functional specifications

The 100BASE-X PCS and PMA for subscriber access networks shall conform to the requirements of the 100BASE-X PCS specified in 24.2 and the 100BASE-X PMA specified in 24.3 with the following exception: The 100BASE-X PCS for subscriber access networks may have the ability to transmit data regardless of whether the PHY has determined that a valid link has been established. The following are the detailed changes to Clause 24 in order to support this additional ability.

66.1.2.1 Variables

Insert a new variable among those already described in 24.2.3.2:

mr_unidirectional_enable

A control variable that enables the unidirectional mode of operation. This variables is provided by a management interface that may be mapped to the Clause 22 Control register Unidirectional enable bit (0.5).

Values: FALSE; Unidirectional capability is not enabled
TRUE; Unidirectional capability is enabled

66.1.2.2 Transmit state diagram

The description of the transmit state diagram is changed to include the contribution of the new mr_unidirectional_enable variable. The third paragraph of 24.2.4.2 is changed to read (~~strikethroughs~~ show deleted text and underscores show inserted text):

> The indication of link_status ≠ OK by the ~~PMA at any time~~ PMA, when mr_unidirectional_enable = FALSE, causes an immediate transition to the IDLE state and supersedes any other Transmit process operations. When mr_unidirectional_enable = TRUE, the Transmit process ignores the value of link_status. This enables the ability to transmit data from the MII when link_status ≠ OK.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 553 of 717

Additionally, the functionality of figure 24-8 shall be changed as represented by Figure 66–1.

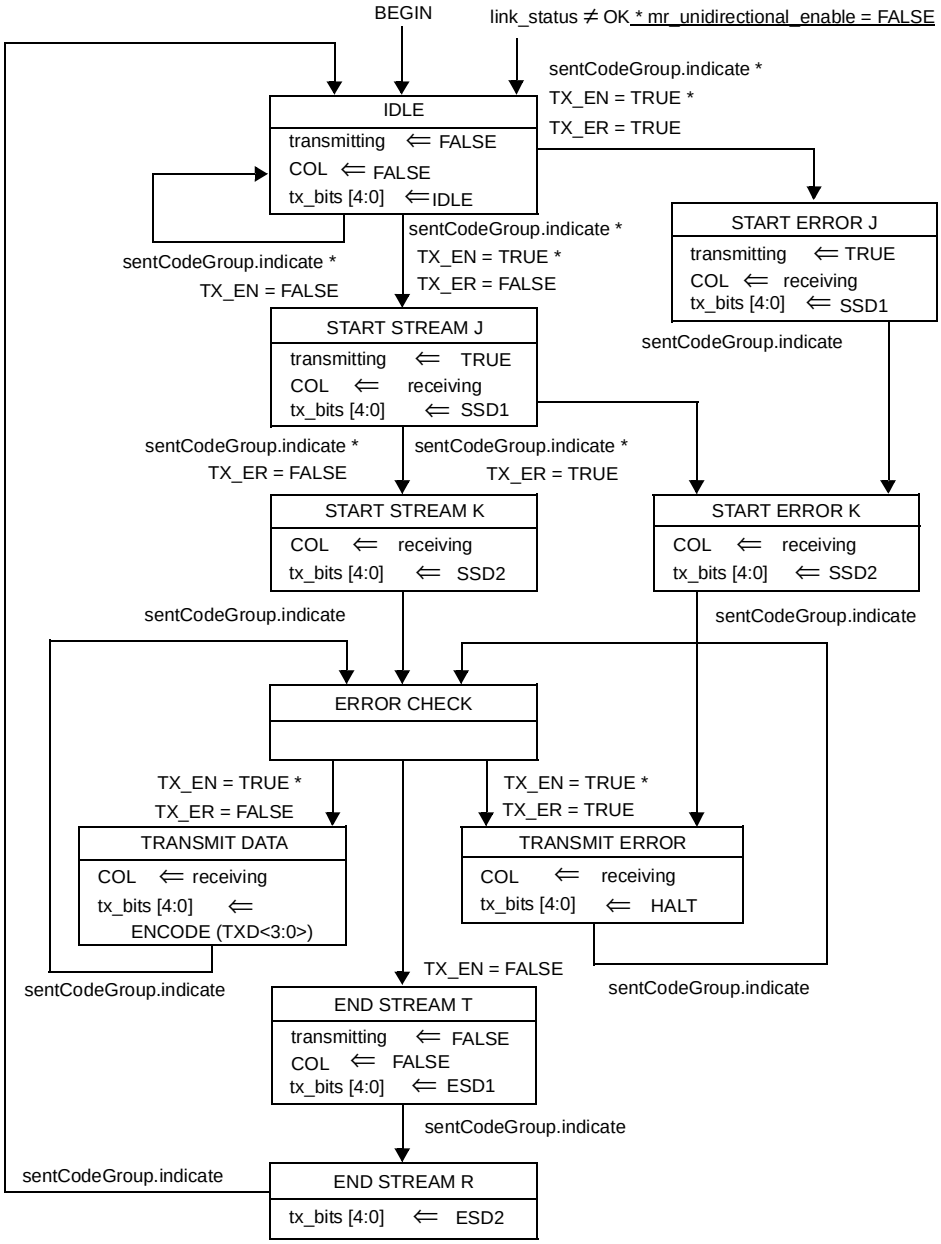


Figure 66–1—Transmit state diagram

66.1.2.3 Far-end fault generate

The description of the far-end fault generate state diagram is also changed to include the contribution of the new mr_unidirectional_enable variable. The first paragraph of 24.3.4.5 is changed to read (~~strikethroughs~~ show deleted text and underscores show inserted text):

> Far-End Fault Generate simply passes tx_code-bits to the TX process when signal_status=ON or when mr_unidirectional_enable=TRUE. When signal_status=OFF and mr_unidirectional_enable=FALSE, it repetitively generates each cycle of the Far-End Fault Indication until signal_status is reasserted or mr_unidirectional_enable is set to TRUE.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 554 of 717

Additionally, the functionality of figure 24-16 shall be changed as represented by Figure 66–2.

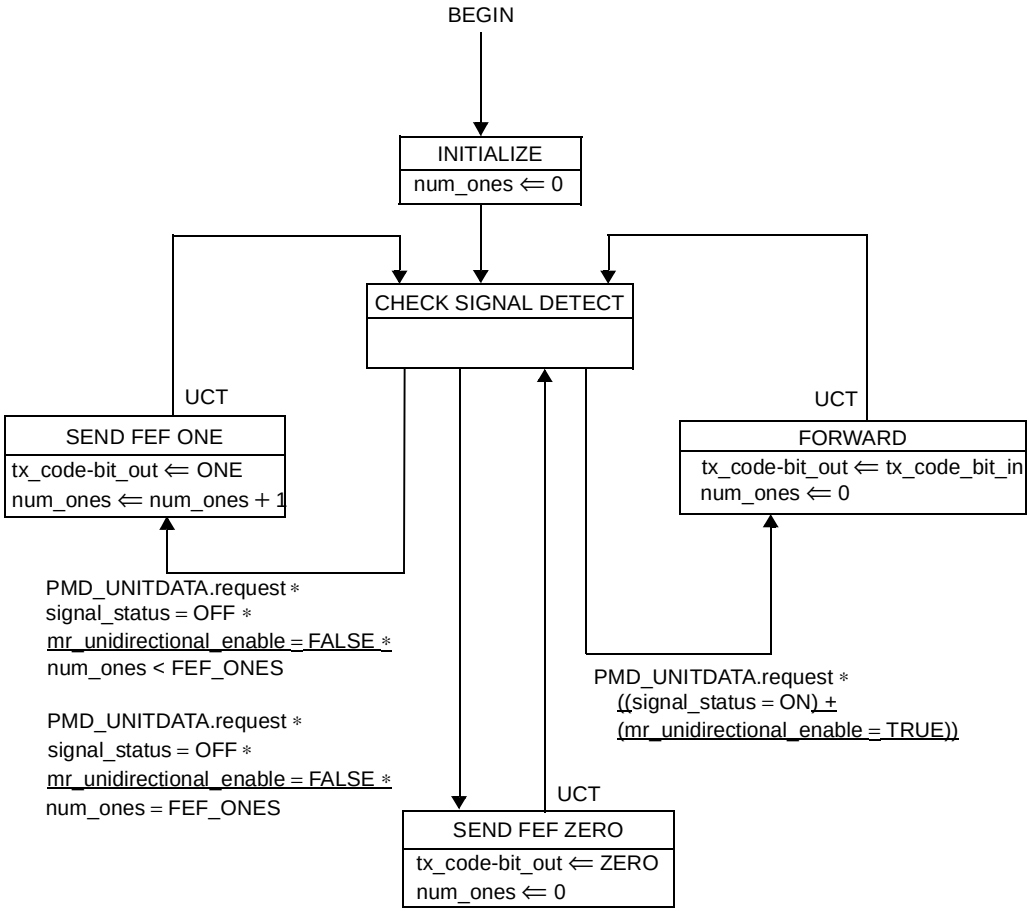


Figure 66–2—Far-End Fault Generate state diagram

66.2 Modifications to the physical coding sublayer (PCS) and physical medium attachment (PMA) sublayer, type 1000BASE-X

66.2.1 Overview

This subclause specifies the 1000BASE-X PCS and PMA for support of subscriber access networks.

66.2.2 Functional specifications

The 1000BASE-X PCS for subscriber access networks shall conform to the requirements of the 1000BASE-X PCS specified in 36.2 with the following exception: The 1000BASE-X PCS for subscriber access networks may have the ability to transmit data regardless of whether the PHY has determined that a valid link has been established. The 1000BASE-X PMA for subscriber access networks shall conform to the requirements of the 1000BASE-X PMA specified in 36.3 with no changes. The following are the detailed changes to Clause 36 in order to support this additional ability.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 555 of 717

66.2.2.1 Variables

Insert a new variable among those already described in 36.2.5.1.3:

mr_unidirectional_enable

A control variable that enables the unidirectional mode of operation. This variable is provided by a management interface that may be mapped to the Clause 22 Control register Unidirectional enable bit (0.5).

Values: FALSE; Unidirectional capability is not enabled
TRUE; Unidirectional capability is enabled

Additionally, modify the existing xmit variable from 36.2.5.1.3 as follows (~~strikethroughs~~ show deleted text and underscores show inserted text):

xmit

When mr_unidirectional_enable=FALSE, xmit is d~~D~~efined in 37.3.1.1. When mr_unidirectional_enable=TRUE, xmit always takes the value DATA.

66.2.2.2 Transmit

The description of the transmit state diagram is changed to include the contribution of the new mr_unidirectional_enable variable. The second paragraph of 36.2.5.2.1 is changed to read (~~strikethroughs~~ show deleted text and underscores show inserted text):

The Transmit ordered_set process continuously sources ordered_sets to the Transmit code-group process. When mr_unidirectional_enable = TRUE, the Auto-Negotiation process xmit flag always takes the value DATA and the Auto-Negotiation process is never invoked. Otherwise, when initially invoked, and when the Auto-Negotiation process xmit flag indicates CONFIGURATION, the Auto-Negotiation process is invoked. When the Auto-Negotiation process xmit flag indicates IDLE, and between packets (as delimited by the GMII), /I/ is sourced. Upon the assertion of TX_EN by the GMII when the Auto-Negotiation process xmit flag indicates DATA, the SPD ordered_set is sourced. Following the SPD, /D/ code-groups are sourced until TX_EN is deasserted. Following the de-assertion of TX_EN, EPD ordered_sets are sourced. If TX_ER is asserted when TX_EN is deasserted and carrier extend error is not indicated by TXD, /R/ ordered_sets are sourced for as many GTX_CLK periods as TX_ER is asserted with a delay of two GTX_CLK periods to first source the /T/ and /R/ ordered sets. If carrier extend error is indicated by TXD during carrier extend, /V/ ordered_sets are sourced. If TX_EN and TX_ER are both de-asserted, the /R/ ordered_set may be sourced, after which the sourcing of /I/ is resumed. If, while TX_EN is asserted, the TX_ER signal is asserted, the /V/ ordered_set is sourced except when the SPD ordered set is selected for sourcing.

66.2.2.3 Transmit state diagram

The 1000BASE-X PCS for subscriber access networks shall implement the transmit process as depicted in Figure 36-5 and Figure 36-6, including compliance with the associated state variables as specified in 36.2.5.1 and as modified in 66.2.2.1.

66.3 Modifications to the reconciliation sublayer (RS) for 10 Gb/s operation

66.3.1 Overview

This subclause specifies the 10 Gb/s RS for support of subscriber access networks.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 556 of 717

66.3.2 Functional specifications

The 10 Gb/s RS for subscriber access networks shall conform to the requirements of the 10 Gb/s RS specified in Clause 46 with the following exception: The 10 Gb/s RS for subscriber access networks may have the ability to transmit data regardless of whether the PHY has determined that a valid link has been established. The following are the detailed changes to Clause 46 in order to support this additional ability.

66.3.2.1 Link fault signaling

The description of the link fault signaling functional specification is changed to include the contribution of the new mr_unidirectional_enable variable. The second paragraph of 46.3.4 is changed to read (~~strikethroughs~~ show deleted text and underscores show inserted text):

> Sublayers within the PHY are capable of detecting faults that render a link unreliable for communication. Upon recognition of a fault condition a PHY sublayer indicates Local Fault status on the data path. When this Local Fault status reaches an RS, the RS tests the unidirectional_enable variable. If this variable is FALSE, the RS stops sending MAC data, and continuously generates a Remote Fault status on the transmit data path (possibly truncating a MAC frame being transmitted). If this variable is TRUE, the RS continues to allow the transmission of MAC data but replaces IPG with a Remote Fault status. When Remote Fault status is received by an RS, the RS tests the unidirectional_enable variable. If this variable is FALSE, the RS stops sending MAC data, and continuously generates Idle control characters. If this variable is TRUE, the RS continues to allow the transmission of MAC data. When the RS no longer receives fault status messages, it returns to normal operation, sending MAC data.

66.3.2.2 Variables

Insert a new variable among those already described in 46.3.4.2:

unidirectional_enable

A control variable that enables the unidirectional mode of operation.

Values: FALSE; Unidirectional capability is not enabled
TRUE; Unidirectional capability is enabled

66.3.2.3 State Diagram

The description of what the RS outputs onto TXC<3:0> and TXD<31:0> is changed to include the contribution of the new mr_unidirectional_enable variable. The lettered list of 46.3.4.3 is changed to read (~~strikethroughs~~ show deleted text and underscores show inserted text):

a) link_fault = OK
The RS shall send MAC frames as requested through the PLS service interface. In the absence of MAC frames, the RS shall generate Idle control characters.

b) link_fault = Local Fault
If unidirectional_enable=FALSE, t~~T~~he RS shall continuously generate Remote Fault Sequence ordered_sets.
If unidirectional_enable=TRUE, the RS shall send MAC frames as requested through the PLS service interface. After a MAC frame and before transition to generation of Remote Fault Sequence the RS shall ensure a column of idles has been sent. In the absence of MAC frames, the RS shall generate Remote Fault Sequence ordered_sets.

c) link_fault = Remote Fault
If unidirectional_enable=FALSE, t~~T~~he RS shall continuously generate Idle control characters.
If unidirectional_enable=TRUE, the RS shall send MAC frames as requested through the PLS service interface. In the absence of MAC frames, the RS shall generate Idle control characters.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 557 of 717

66.4 Protocol Implementation Conformance Statement (PICS) proforma for Clause 66, Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport[23]

66.4.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Clause 66, Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

66.4.2 Identification

66.4.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification—e.g., name(s) and version(s) for machines and/or operating systems; System Names(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

66.4.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004)	
Date of Statement	

[23]Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 558 of 717

66.4.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
*PUNI	Unidirectional operation	66	Device supports unidirectional operation	O	Yes [ ] No [ ]
*HUN	100BASE-X Functionality	66.1	Device supports functionality required for 100BASE-X PHY for subscriber access networks	O	Yes [ ] No [ ]
*GIG	1000BASE-X Functionality	66.2	Device supports functionality required for 1000BASE-X PCS for subscriber access networks	O	Yes [ ] No [ ]
*XG	10 Gb/s Functionality	66.3	Device supports functionality required for 10 Gb/s RS for subscriber access networks	O	Yes [ ] No [ ]

66.4.4 PICS proforma tables for Extensions of the 10 Gb/s Reconciliation Sublayer (RS), 100BASE-X PHY, and 1000BASE-X PHY for unidirectional transport

66.4.4.1 Maintaining compatibility with 802.1 protocols

Item	Feature	Subclause	Value/Comment	Status	Support
MC1	Unidirectional mode enabled	66	Full duplex and disable AutoNeg and ((OAM present and enabled) or 1000BASE-PX-D) and not 1000BASE-PX-U	M	Yes [ ] No [ ]

66.4.4.2 Extensions of the 100BASE-X PHY

Item	Feature	Subclause	Value/Comment	Status	Support
H1	Integrates 100BASE-X PCS and PMA	66.1.2	See Clause 24	HUN:M	Yes [ ]
H2	Transmit state machine	66.1.2.2	Replaces Figure 24–8	PUNI* HUN:M	Yes [ ]
H3	Far-End Fault Generate state machine	66.1.2.3	Replaces Figure 24–16	PUNI* HUN:M	Yes [ ]

66.4.4.3 Extensions of the 1000BASE-X PHY

Item	Feature	Subclause	Value/Comment	Status	Support
G1	Integrates 1000BASE-X PCS and PMA	66.2.2	See Clause 36	GIG:M	Yes [ ]
G2	Transmit state machine	66.2.2.3	As modified by the new variables	PUNI* GIG:M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 559 of 717

66.4.4.4 Extensions of the 10 Gb/s RS

Item	Feature	Subclause	Value/Comment	Status	Support
LF1	Integrates 10 Gb/s RS	66.3.2	See Clause 46	XG:M	Yes [ ]
LF2	link_fault = OK and MAC frames	66.3.2.3	RS services MAC frame transmission requests	PUNI* XG:M	Yes [ ] No [ ]
LF3	link_fault = OK and no MAC frames	66.3.2.3	In absence of MAC frames, RS transmits Idle control characters	PUNI* XG:M	Yes [ ] No [ ]
LF4	link_fault = Local Fault and unidirectional_enable = FALSE	66.3.2.3	RS transmits continuous Remote Fault Sequence ordered_sets	PUNI* XG:M	Yes [ ] No[ ]
LF5	link_fault = Local Fault and unidirectional_enable = TRUE and MAC frames	66.3.2.3	RS services MAC frame transmission requests	PUNI* XG:M	Yes [ ] No[ ]
LF6	link_fault = Local Fault and unidirectional_enable = TRUE and MAC frame ends	66.3.2.3	RS transmits one full column of IDLE after frame	PUNI* XG:M	Yes [ ] No[ ]
LF7	link_fault = Local Fault and unidirectional_enable = TRUE and no MAC frames	66.3.2.3	RS transmits continuous Remote Fault Sequence ordered_sets	PUNI* XG:M	Yes [ ] No[ ]
LF8	link_fault = Remote Fault and unidirectional_enable = FALSE	66.3.2.3	RS transmits continuous Idle control characters	PUNI* XG:M	Yes [ ] No [ ]
LF9	link_fault = Remote Fault and unidirectional_enable = TRUE and MAC frames	66.3.2.3	RS services MAC frame transmission requests	PUNI* XG:M	Yes [ ] No [ ]
LF10	link_fault = Remote Fault and unidirectional_enable = TRUE and no MAC frames	66.3.2.3	RS transmits continuous Idle control characters	PUNI* XG:M	Yes [ ] No[ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 560 of 717

67. System considerations for Ethernet subscriber access networks

67.1 Overview

This clause provides information on building Ethernet subscriber access networks, also referred to as "Ethernet in the First Mile", or EFM networks.

EFM encompasses a family of technologies that vary in media type and signalling speed. EFM is designed to be deployed in networks of one or multiple EFM media type(s) as well as interact with mixed 10/100/1000/10000 Mb/s Ethernet networks. Any network topology defined in IEEE Std 802.3 can be used within the subscriber premises and then connected to an Ethernet subscriber access network via an IEEE Std 802.1D compliant bridge, or a router.

Further, within a given EFM domain, the specific EFM technologies allow for a variety of topologies affording the subscriber access network maximum flexibility. For example, a 1000BASE-PX10 P2MP system with 16 ONUs can be built with a 1:16 splitter or as a tree-and-branch network utilizing more than one splitter.

The design of multiple-domain networks is governed by the rules defining each of the transmission systems incorporated into the design. The physical size of a network is limited by the characteristics of individual network components. These characteristics include the media lengths and type.

Table 67–1 summarizes the various EFM media characteristics.

Table 67–1—Characteristics of the various EFM network media segments

Media type	Rate (Mb/s)	Number of PHYs per segment	Nominal Reach (km)
Optical 100 Mb/s Fiber Segment (100BASE-LX10, 100BASE-BX10)	100	2	10
Optical 1000 Mb/s Fiber Segment (1000BASE-LX10, 1000BASE-BX10)	1000	2	10
Optical 1000 Mb/s P2MP Segment (1000BASE-PX10)	1000	17[a] [b]	10
Optical 1000 Mb/s P2MP Segment (1000BASE-PX20)	1000	17[a] [b]	20
Copper High Speed Segment (10PASS-TS)	10[c]	2	0.75
Copper Long Reach Segment (2BASE-TL)	2[c]	2	2.7

[a]P2MP segments may be implemented with a trade off between link span and split ratio listed. Refer to 67.2.1.
[b]The number of PHYs in the P2MP segment includes the OLT PHY.
[c]Nominal rate stated at the nominal reach in this table. Rate and reach can vary depending on the plant. For 2BASE-TL please refer to Annex 63B for more information. For 10PASS-TS, please refer to Annex 62B for more information.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 561 of 717

67.2 Discussion and examples of EFM P2MP topologies

This section discusses EFM P2MP topologies. It details flexibility of trading off split ratio for link span. This section also shows some examples of different P2MP topologies.

67.2.1 Trade off between link span and split ratio

While the P2MP PMDs are nominally described in terms of a link span of either 10 km or 20 km with a 1:16 split ratio, other link spans and split ratios can be implemented provided that the requirements of Table 60–1 are met.

67.2.2 Single splitter topology

A P2MP topology implemented with a single optical splitter is shown in Figure 67–1.

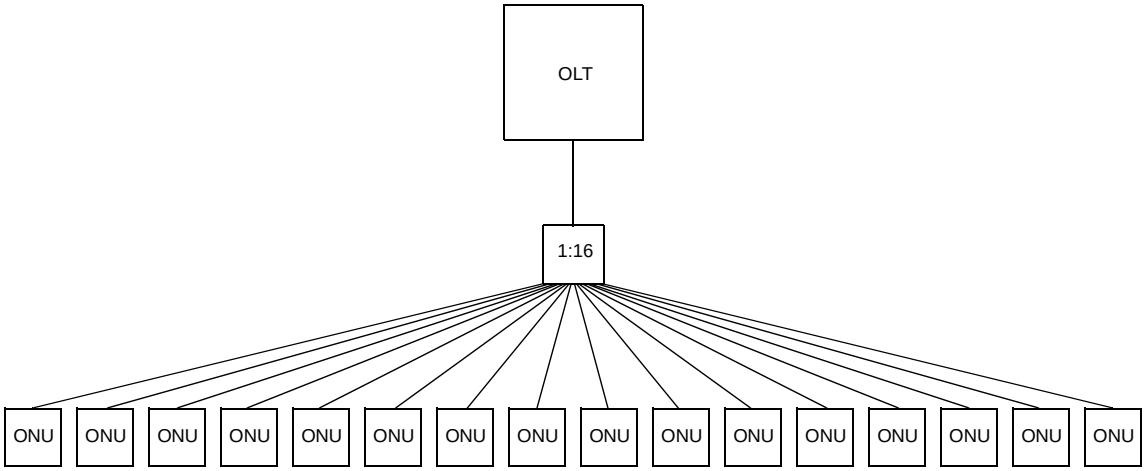


Figure 67–1—Single splitter topology

67.2.3 Tree-and-branch topology

A P2MP topology implemented with a tree-and-branches of optical splitters is shown in Figure 67–2.

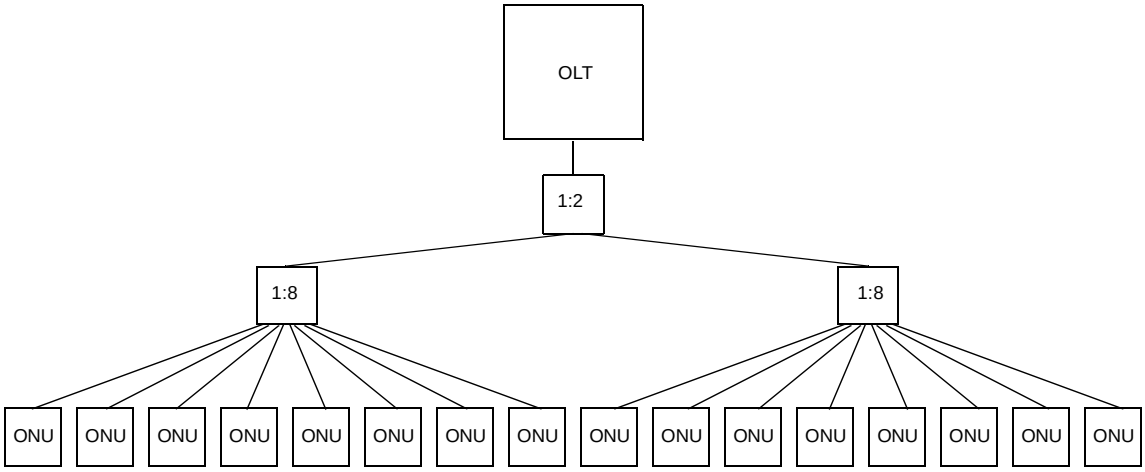


Figure 67–2—Tree-and-branch topology


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 562 of 717

67.2.4 Interoperability between certain 1000BASE-PX10 and 1000BASE-PX20

1000BASE-PX20-D PMD is interoperable with a 1000BASE-PX10-U PMD, this allows certain upgrade possibilities from 10 km to 20 km P2MP networks.

67.3 Hybrid Media topologies

Hybrid media topologies, such as those shown in Figure 67–3, can be implemented using a combination of P2P or P2MP optical links and copper links.

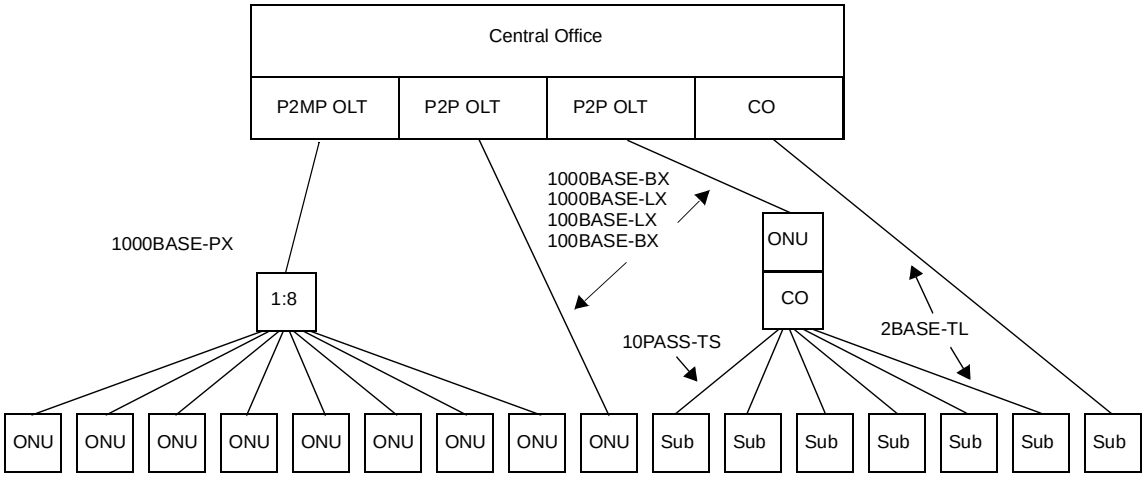

CO = central office
ONU = optical network unit
Sub = subscriber premise equipment
OLT = optical line terminal

Figure 67–3—Hybrid Media Topologies

67.4 Topology limitations

The physical size of EFM networks is not limited by the round-trip collision propagation delay. Instead, the maximum link length between DTEs is limited by the signal transmission characteristics of the specific link.

67.5 Deployment restrictions for subscriber access copper

10PASS-TS and 2BASE-TL PHYs have been specified to allow deployment on public access networks. Non-loaded cable is a requirement of the signalling methods employed. The 10PASS-TS do not preclude coexistence with POTS. However, it is important that systems are designed and configured to comply with all appropriate regulatory, governmental and regional requirements. Refer to Annex 62A (10PASS-TS) and Annex 63A (2PASS-TL) for further information regarding configuration profiles.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 563 of 717

67.6 Operations, Administration, and Maintenance

All P2P and emulated P2P links, including all of the EFM network media segments, support the optional OAM sublayer as defined in Clause 57. 2BASE-TL and 10PASS-TS PHYs do not support unidirectional links as defined in 57.2.9 (see 61.1).

67.6.1 Unidirectional links

Some physical layer devices have the optional ability to encode and transmit data while one direction of the link is non-operational.

This ability should be used only when the OAM sublayer is present and enabled or for a 1000BASE-PX-D PHY. Otherwise, MAC Client frames will be sent across a unidirectional link potentially causing havoc with bridge and other higher layer protocols. The feature should not be enabled for 1000BASE-PX-U PHYs in service, to avoid simultaneous transmission by more than one ONU.

67.6.2 Active and Passive modes

A device may be configured to be in either Active or Passive OAM mode. At least one end of a given link is required to be in Active mode.

In an access network, customer premises devices will commonly be configured as Passive devices. All other devices in an access network will commonly be configured as Active devices. For a detailed description of Active and Passive mode, refer to 57.2.6.

67.6.3 Link status signaling in P2MP networks

In P2MP networks the local_link_status parameter should reflect the status of a logical link associated with the underlying instance of Multi-point MAC Control. This is achieved by mapping the local_link_status parameter to variable 'registered' defined in 64.3.3.2 as follows:

local_link_status = OK if registered = true

local_link_status = FAIL if registered = false

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 564 of 717

Annex 4A

(normative)

Simplified full duplex media access control

This annex is based on the Clause 4 MAC, with simplifications for use in networks that don't require the half duplex operational mode. This annex stands alone and does not rely on information within Clause 4 to be implemented.

4A.1 Functional model of the MAC method

4A.1.1 Overview

The architectural model described in Clause 1 is used in this clause to provide a functional description of the LAN full duplex MAC sublayer.

The MAC sublayer defines a medium-independent facility, built on the medium-dependent physical facility provided by the Physical Layer, and under the access-layer-independent LAN LLC sublayer (or other MAC client). It is applicable to a general class of media suitable for use with the full duplex media access discipline.

The LLC sublayer and the MAC sublayer together are intended to have the same function as that described in the OSI model for the Data Link Layer alone. The partitioning of functions presented in this standard requires two main functions generally associated with a data link control procedure to be performed in the MAC sublayer. They are as follows:

a) Data encapsulation (transmit and receive)
    1) Framing (frame boundary delimitation, frame synchronization)
    2) Addressing (handling of source and destination addresses)
    3) Error detection (detection of physical medium transmission errors)
b) Media access management (physical layer congestion)

This MAC does not support the *half duplex* mode of operation so there is no need for collision avoidance or handling. However, this MAC does have the ability to avoid congestion within the physical layer. Therefore, Media Access Management comprises the transmission of bits to the physical layer and optionally delaying any transmission for an interframe gap or for a longer period of time based on congestion within the physical layer.

An optional MAC control sublayer, architecturally positioned between LLC (or other MAC client) and the MAC, is specified in Clause 31 and Clause 64. This MAC Control sublayer is transparent to both the underlying MAC and its client (typically LLC). The MAC sublayer operates independently of its client; i.e., it is unaware whether the client is LLC or the MAC Control sublayer. This allows the MAC to be specified and implemented in one manner, whether or not the MAC Control sublayer is implemented. References to LLC as the MAC client in text and figures apply equally to the MAC Control sublayer, if implemented.

The remainder of this clause provides a functional model of this MAC method.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 565 of 717

4A.1.2 Full duplex operation

This subclause provides an overview of frame transmission and reception in terms of the functional model of the architecture. This overview is descriptive, rather than definitional; the formal specifications of the operations described here are given in 4A.2 and 4A.3. Specific implementations for full duplex mechanisms that meet this standard are given in 4A.4. Figure 1-1 provides the architectural model described functionally in the subclauses that follow.

The Physical Layer Signaling (PLS) component of the Physical Layer provides an interface to the MAC sublayer for the serial transmission of bits onto the physical media. For completeness, in the operational description that follows some of these functions are included as descriptive material. The concise specification of these functions is given in 4A.2 for the MAC functions and in Clause 7 for PLS.

Transmit frame operations are independent from receive frame operations and respond to different signals from the Physical Layer. The carrierSense signal indicates that the transmit function must defer because of congestion at the physical layer (see 4A.2.3.2.1). The receiveDataValid signal indicates the presence of incoming data to the the receive function (see 4A.2.4.2).

4A.1.2.1 Transmission

When a MAC client requests the transmission of a frame, the Transmit Data Encapsulation component of the full duplex MAC sublayer constructs the frame from the client-supplied data. It prepends a preamble and a Start Frame Delimiter to the beginning of the frame. Using information provided by the client, the MAC sublayer also appends a PAD at the end of the MAC information field of sufficient length to ensure that the transmitted frame length satisfies a minimum frame-size requirement (see 4A.2.3.2.4). It also prepends destination and source addresses, the length/type field, and appends a frame check sequence to provide for error detection. If the MAC supports the use of client-supplied frame check sequence values, then it shall use the client-supplied value, when present. If the use of client-supplied frame check sequence values is not supported, or if the client-supplied frame check sequence value is not present, then the MAC shall compute this value. Frame transmission may be initiated once the carrierSense signal has been removed and after the interframe delay, regardless of the presence of receive activity.

The Physical Layer performs the task of generating the signals on the medium that represent the bits of the frame. Once the Physical Layer has indicated its readiness to transmit another frame by removing the carrierSense signal, it shall accept a complete frame from the MAC layer. A functional description of the Physical Layer is given in Clause 7 and beyond.

When transmission has completed, the MAC sublayer so informs the MAC client and awaits the next request for frame transmission.

4A.1.2.2 Reception

At each receiving station, the arrival of a frame is first detected by the Physical Layer, which responds by synchronizing with the incoming preamble, and by turning on the receiveDataValid signal. As the encoded bits arrive from the medium, they are decoded and translated back into binary data. The Physical Layer passes subsequent bits up to the MAC sublayer, where the leading bits are discarded, up to and including the end of the preamble and Start Frame Delimiter.

Meanwhile, the Receive Media Access Management component of the MAC sublayer, having observed receiveDataValid, has been waiting for the incoming bits to be delivered. Receive Media Access Management collects bits from the Physical Layer entity as long as the receiveDataValid signal remains on. When the receiveDataValid signal is removed, the frame is truncated to an octet boundary, if necessary, and passed to Receive Data Decapsulation for processing.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 566 of 717


Receive Data Decapsulation checks the frame's Destination Address field to decide whether the frame should be received by this station. If so, it passes the Destination Address (DA), the Source Address (SA), the Length/Type, the Data, and (optionally) the Frame Check Sequence (FCS) fields to the MAC client, along with an appropriate status code, as defined in 4A.3.2. It also checks for invalid MAC frames by inspecting the FCS to detect any damage to the frame enroute, and by checking for proper octet-boundary alignment of the end of the frame. Frames with a valid FCS may also be checked for proper octet-boundary alignment.

4A.1.3 Relationships to the MAC client and physical layers

The MAC sublayer provides services to the MAC client required for the transmission and reception of frames. Access to these services is specified in 4A.3. The MAC sublayer makes a best effort to transfer a serial stream of bits to the Physical Layer. Although certain errors are reported to the client, error recovery is not provided by MAC. Error recovery may be provided by the MAC client or higher (sub)layers.

4A.1.4 Access method functional capabilities

The following summary of the functional capabilities of the MAC sublayer is intended as a quick reference guide to the capabilities of the standard, as shown in Figure 4A–1:

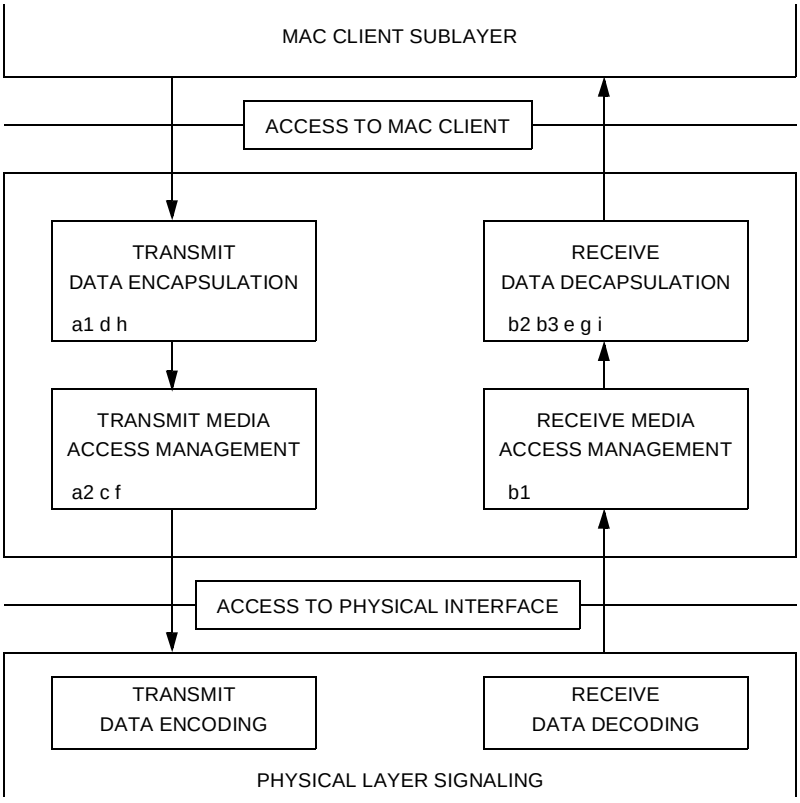

NOTE—a1, b2, etc., refer to functions listed in 4A.1.4.

Figure 4A–1—Media access control functions

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 567 of 717

a) For Frame Transmission
   1) Accepts data from the MAC client and constructs a frame.
   2) Presents a bit-serial data stream to the Physical Layer for transmission on the medium.

   NOTE—Assumes data passed from the client sublayer are octet multiples.

b) For Frame Reception
   1) Receives a bit-serial data stream from the Physical Layer.
   2) Presents to the MAC client sublayer frames that are either broadcast frames or directly addressed to the local station.
   3) Discards or passes to Network Management all frames not addressed to the receiving station.

c) Defers transmission of a bit-serial stream whenever the physical layer is busy.
d) Appends proper FCS value to outgoing frames and verifies full octet boundary alignment.
e) Checks incoming frames for transmission errors by way of FCS and verifies octet boundary alignment
f) Delays transmission of frame bit stream for specified interframe gap period.
g) Discards received transmissions that are less than a minimum length.
h) Appends preamble, Start Frame Delimiter, DA, SA, Length/Type field, and FCS to all frames, and inserts PAD field for frames whose data length is less than a minimum value.
i) Removes preamble, Start Frame Delimiter, DA, SA, Length/Type field, FCS, and PAD field (if necessary) from received frames.

4A.2 Media access control (MAC) method: precise specification

4A.2.1 Introduction

A precise algorithmic definition is given in this subclause, providing a procedural model for the MAC process with a program in the computer language Pascal. See references [B11] and [B34] for resource material. Note whenever there is any apparent ambiguity concerning the definition of some aspect of the MAC method, it is the Pascal procedural specification in 4A.2.7 through 4A.2.10 that should be consulted for the definitive statement. Subclauses 4A.2.2 through 4A.2.6 provide, in prose, a description of the access mechanism with the formal terminology to be used in the remaining subclauses.

4A.2.2 Overview of the procedural model

The functions of the MAC method are presented below, modeled as a program written in the computer language Pascal. This procedural model is intended as the primary specification of the functions to be provided in any MAC sublayer implementation. It is important to distinguish, however, between the model and a real implementation. The model is optimized for simplicity and clarity of presentation, while any realistic implementation shall place heavier emphasis on such constraints as efficiency and suitability to a particular implementation technology or computer architecture. In this context, several important properties of the procedural model shall be considered.

4A.2.2.1 Ground rules for the procedural model

a) First, it shall be emphasized that *the description of the MAC sublayer in a computer language is in no way intended to imply that procedures shall be implemented as a program executed by a computer.* The implementation may consist of any appropriate technology including hardware, firmware, software, or any combination.
b) Similarly, it shall be emphasized that it is the behaviour of any MAC sublayer implementations that shall match the standard, not their internal structure. The internal details of the procedural model are useful only to the extent that they help specify that behaviour clearly and precisely.
c) The handling of incoming and outgoing frames is rather stylized in the procedural model, in the sense that frames are handled as single entities by most of the MAC sublayer and are only serialized for presentation to the Physical Layer. In reality, many implementations will instead handle frames serially on a bit, octet or word basis. This approach has not been reflected in the procedural model, since this only complicates the description of the functions without changing them in any way.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 568 of 717

d) The model consists of algorithms designed to be executed by a number of concurrent processes; these algorithms collectively implement the MAC procedure. The timing dependencies introduced by the need for concurrent activity are resolved in two ways:

   1) *Processes Versus External Events.* It is assumed that the algorithms are executed "very fast" relative to external events, in the sense that a process never falls behind in its work and fails to respond to an external event in a timely manner. For example, when a frame is to be received, it is assumed that the Media Access procedure ReceiveFrame is always called well before the frame in question has started to arrive.
   2) *Processes Versus Processes.* Among processes, no assumptions are made about relative speeds of execution. This means that each interaction between two processes shall be structured to work correctly independent of their respective speeds. Note, however, that the timing of interactions among processes is often, in part, an indirect reflection of the timing of external events, in which case appropriate timing assumptions may still be made.

It is intended that the concurrency in the model reflect the parallelism intrinsic to the task of implementing the MAC client and MAC procedures, although the actual parallel structure of the implementations is likely to vary.

4A.2.2.2 Use of Pascal in the procedural model

Several observations need to be made regarding the method with which Pascal is used for the model. Some of these observations are as follows:

a) The following limitations of the language have been circumvented to simplify the specification:
   1) The elements of the program (variables and procedures, for example) are presented in logical groupings, in top-down order. Certain Pascal ordering restrictions have thus been circumvented to improve readability.
   2) The *process* and *cycle* constructs of Concurrent Pascal, a Pascal derivative, have been introduced to indicate the sites of autonomous concurrent activity. As used here, a process is simply a parameterless procedure that begins execution at "the beginning of time" rather than being invoked by a procedure call. A cycle statement represents the main body of a process and is executed repeatedly forever.
   3) The lack of variable array bounds in the language has been circumvented by treating frames as if they are always of a single fixed size (which is never actually specified). The size of a frame depends on the size of its data field, hence the value of the "pseudo-constant" frameSize should be thought of as varying in the long term, even though it is fixed for any given frame.
   4) The use of a variant record to represent a frame (as fields and as bits) follows the spirit but not the letter of the Pascal Report, since it allows the underlying representation to be viewed as two different data types.

b) The model makes no use of any explicit interprocess synchronization primitives. Instead, all interprocess interaction is done by way of carefully stylized manipulation of shared variables. For example, some variables are set by only one process and inspected by another process in such a manner that the net result is independent of their execution speeds. While such techniques are not generally suitable for the construction of large concurrent programs, they simplify the model and more nearly resemble the methods appropriate to the most likely implementation technologies (microcode, hardware state machines, etc.)

4A.2.2.3 Organization of the procedural model

The procedural model used here is based on five cooperating concurrent processes. The Frame Transmitter process and the Frame Receiver process are provided by the clients of the MAC sublayer (which may include the LLC sublayer) and make use of the interface operations provided by the MAC sublayer. The other three processes are defined to reside in the MAC sublayer. The five processes are as follows:

a) Frame Transmitter process
b) Frame Receiver process
c) Bit Transmitter process
d) Bit Receiver process
e) Deference process

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 569 of 717

DirecTV Exhibit 1010, Page 570 of 717

This organization of the model is illustrated in Figure 4A–2 and reflects the fact that the communication of entire frames is initiated by the client of the MAC sublayer, while the timing of individual bit transfers is based on interactions between the MAC sublayer and the Physical-Layer-dependent bit time.


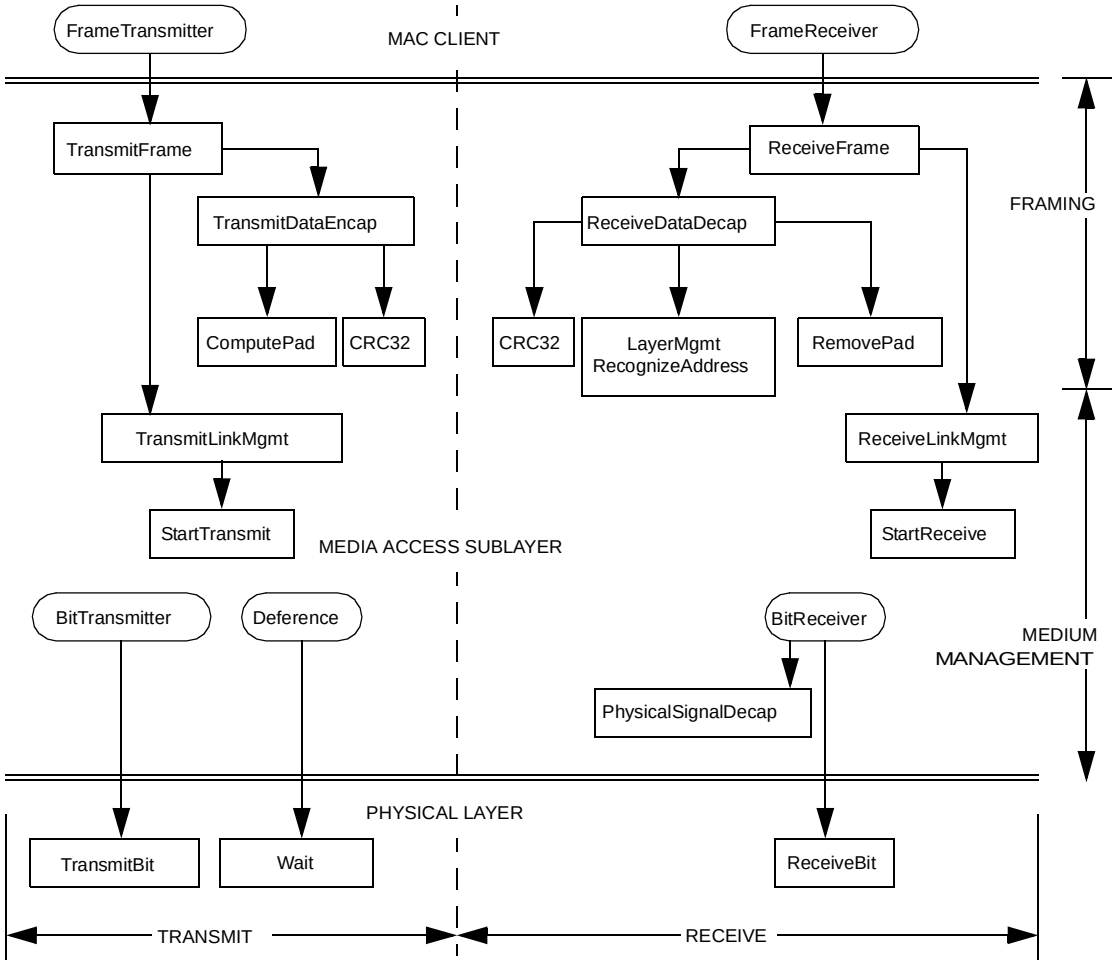


Figure 4A–2—Relationship among MAC procedures

Figure 4A–2 depicts the static structure of the procedural model, showing how the various processes and procedures interact by invoking each other. Figure 4A–3a, Figure 4A–3b, and Figure 4A–3c summarize the dynamic behaviour of the model during transmission and reception, focusing on the steps that shall be performed, rather than the procedural structure that performs them. The usage of the shared state variables is not depicted in the figures, but is described in the comments and prose in the following subclauses.

Copyright © 2004 IEEE. All rights reserved.

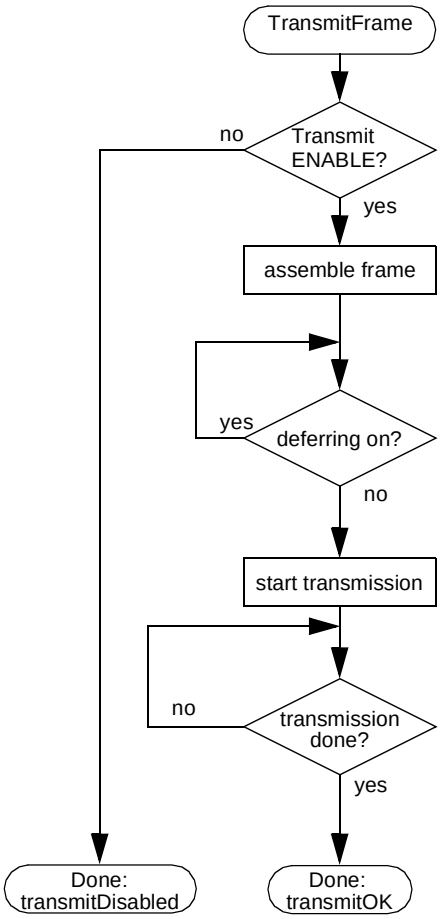


a) TransmitFrame

Figure 4A–3a—Control flow summary

Copyright © 2004 IEEE. All rights reserved.


DirecTV Exhibit 1010, Page 571 of 717

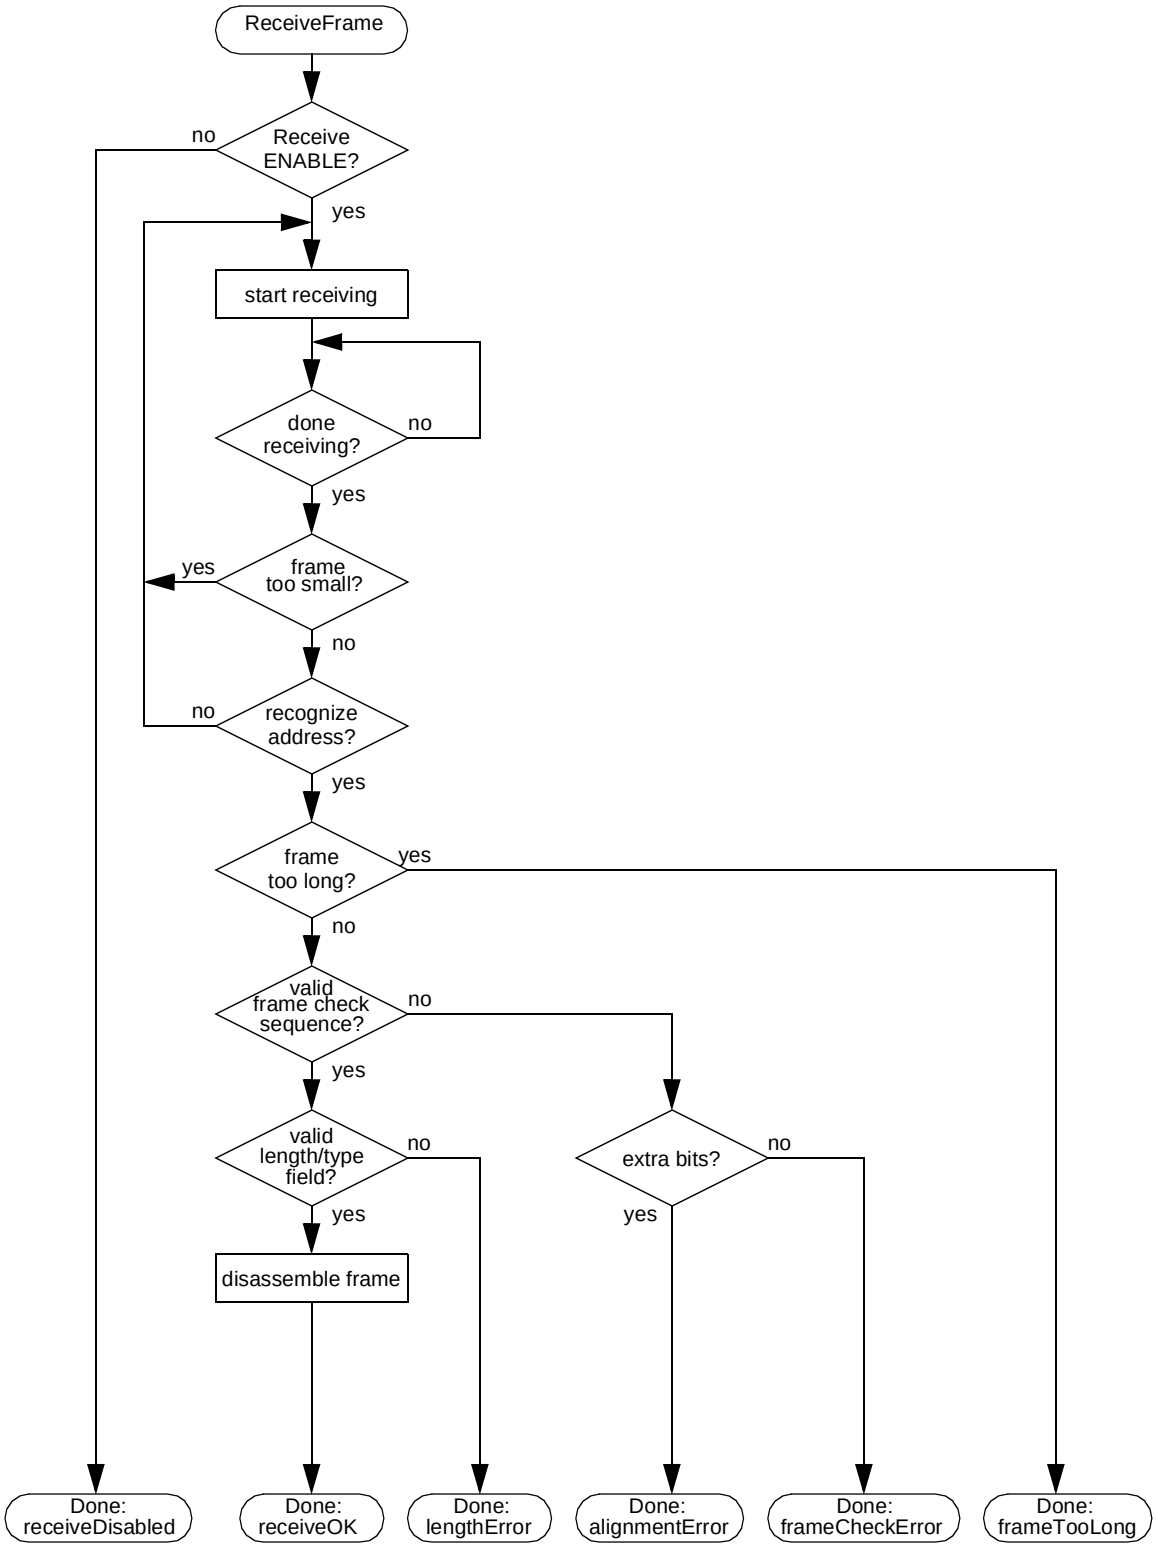

b) ReceiveFrame

Figure 4A–3b—Control flow summary

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 572 of 717

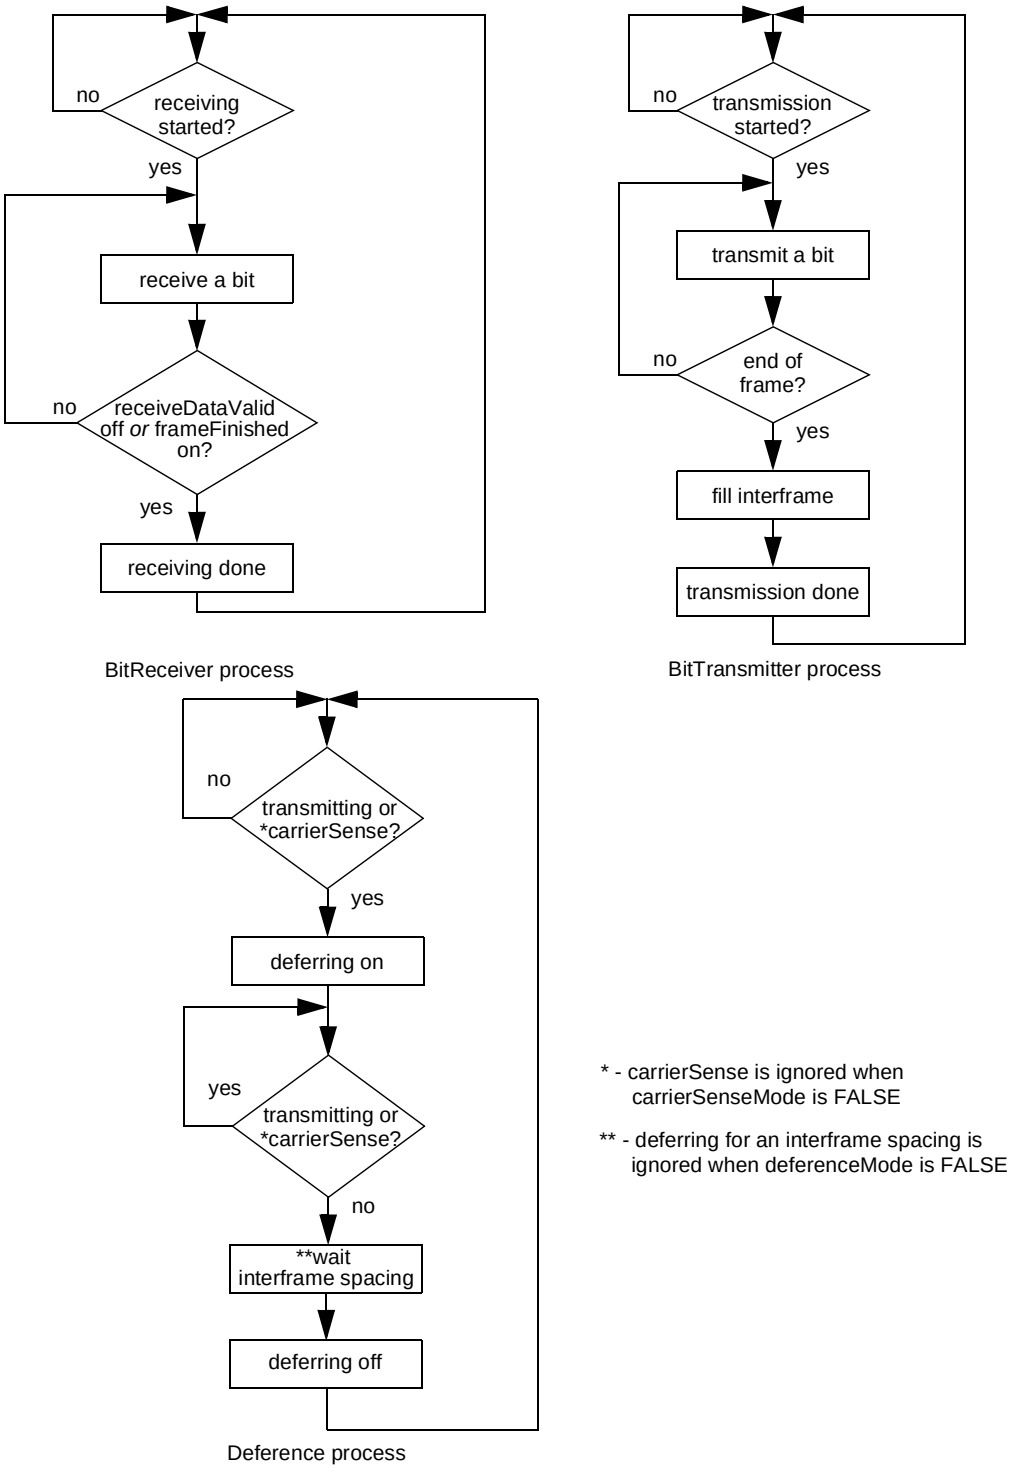

c) MAC sublayer

Figure 4A–3c—Control flow

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 573 of 717

4A.2.2.4 Layer management extensions to procedural model

In order to incorporate network management functions, this Procedural Model has been expanded beyond that provided in ISO/IEC 8802-3: 1990. Network management functions have been incorporated in two ways. First, 4A.2.7–4A.2.10, 4A.3.2, Figure 4A–3a, and Figure 4A–3b have been modified and expanded to provide management services. Second, Layer Management procedures have been added as 5.2.4. The Pascal variables are shared between Annex 4A and Clause 5.

The Pascal procedural specification shall be consulted for the definitive statement when there is any apparent ambiguity concerning the definition of some aspect of the MAC access method.

The Layer Management facilities provided by the MAC and Physical Layer management definitions provide the ability to manipulate management counters and initiate actions within the layers. The managed objects within this standard are defined as sets of attributes, actions, notifications, and behaviours in accordance with IEEE Std 802.1F-1993, and ISO/IEC International Standards for network management.

4A.2.3 Frame transmission model

Frame transmission includes data encapsulation and Media Access management aspects:

a) Transmit Data Encapsulation includes the assembly of the outgoing frame (from the values provided by the MAC client) and frame check sequence generation.
b) Transmit Media Access Management includes carrier deference, interframe spacing and bit transmission.

4A.2.3.1 Transmit data encapsulation

The fields of the MAC frame are set to the values provided by the MAC client as arguments to the TransmitFrame operation (see 4A.3) with the following possible exceptions: the padding field and the frame check sequence. The padding field is necessary to enforce the minimum frame size. The frame check sequence field may be (optionally) provided as an argument to the MAC sublayer. It is optional for a MAC to support the provision of the frame check sequence in such an argument. If this field is provided by the MAC client, the padding field shall also be provided by the MAC client, if necessary. If this field is not provided by the MAC client, or if the MAC does not support the provision of the frame check sequence as an external argument, it is set to the CRC value as generate by the MAC sublayer, after appending the padding field, if necessary.

4A.2.3.2 Transmit media access management

4A.2.3.2.1 Deference

When a frame is submitted by the MAC client for transmission, the transmission is initiated as soon as possible, but in conformance with the following rules. The variable carrierSense is ignored in process Deference when the variable carrierSenseMode is FALSE.

The MAC sublayer monitors the transmitting variable, which indicates the MAC is transmitting data to the physical layer, as well as the carrierSense signal provided by the PLS, which indicates the physical layer is not ready for the next frame. When either transmitting or carrierSense is true, the MAC delays any pending transmission. When both are false, the MAC continues to defer for a proper interFrameSpacing (see 4A.2.3.2.2).

If, at the end of the interFrameSpacing, a frame is waiting to be transmitted, transmission is initiated. When transmission has completed (or immediately, if there was nothing to transmit) the MAC sublayer resumes its original monitoring of transmitting and carrierSense.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 574 of 717

4A.2.3.2.2 Interframe spacing

As defined in 4A.2.3.2.1, the rules for deferring ensure a minimum interframe spacing of interFrameSpacing bit times. This is intended to provide interframe recovery time to aid in frame delineation on the physical medium.

Note that interFrameSpacing is the minimum value of the interframe spacing. If necessary for implementation reasons, a transmitting sublayer may use a larger value with a resulting decrease in its throughput. The larger value is determined by the parameters of the implementation, see 4A.4.

4A.2.3.2.3 Transmission

Transmissions may be initiated whenever the station has a frame queued, subject only to the physical layer congestion and interframe spacing required to allow recovery for the physical medium. In certain implementations, interframe spacing is accomplished outside this layer. These implementations are allowed to ignore the deference process and always initiate transmissions immediately, subject only to conditions enforced outside this sublayer.

4A.2.3.2.4 Minimum frame size

The MAC requires that a minimum frame length of minFrameSize bits be transmitted. If frameSize is less than minFrameSize, then the MAC sublayer shall append extra bits in units of octets (pad), after the end of the MAC client data field but prior to calculating, and appending, the FCS (if not provided by the MAC client). The number of extra bits shall be sufficient to ensure that the frame, from the DA field through the FCS field inclusive, is at least minFrameSize bits. If the FCS is (optionally) provided by the MAC client, the pad shall also be provided by the MAC client. The content of the pad is unspecified.

4A.2.4 Frame reception model

The MAC sublayer frame reception includes both data decapsulation and Media Access management aspects:

a) Receive data decapsulation comprises address recognition, frame check sequence validation, and frame disassembly to pass the fields of the received frame to the MAC client.

b) Receive media access management comprises recognition of collision fragments from incoming frames and truncation of frames to octet boundaries.

4A.2.4.1 Receive data decapsulation

4A.2.4.1.1 Address recognition

The MAC sublayer is capable of recognizing individual and group addresses.

a) *Individual Addresses.* The MAC sublayer recognizes and accepts any frame whose DA field contains the individual address of the station.

b) *Group Addresses*. The MAC sublayer recognizes and accepts any frame whose DA field contains the Broadcast address.

The MAC sublayer is capable of activating some number of group addresses as specified by higher layers. The MAC sublayer recognizes and accepts any frame whose Destination Address field contains an active group address. An active group address may be deactivated.

The MAC sublayer may also provide the capability of operating in the promiscuous receive mode. In this mode of operation, the MAC sublayer recognizes and accepts all valid frames, regardless of their Destination Address field values.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 575 of 717

4A.2.4.1.2 Frame check sequence validation

FCS validation is essentially identical to FCS generation. If the bits of the incoming frame (exclusive of the FCS field itself) do not generate a CRC value identical to the one received, an error has occurred and the frame is identified as invalid.

4A.2.4.1.3 Frame disassembly

Upon recognition of the Start Frame Delimiter at the end of the preamble sequence, the MAC sublayer accepts the frame. If there are no errors, the frame is disassembled and the fields are passed to the MAC client by way of the output parameters of the ReceiveFrame operation.

4A.2.4.2 Receive media access management

The MAC sublayer recognizes the boundaries of an incoming frame by monitoring the receiveDataValid signal provided by the Physical Layer. Two possible length errors can occur that indicate ill-framed data: the frame may be too long, or its length may not be an integer number of octets.

a) *Maximum Frame Size.* The receiving MAC sublayer is not required to enforce the frame size limit, but it is allowed to truncate frames longer than maxUntaggedFrameSize octets and report this event as an (implementation-dependent) error. A receiving MAC sublayer that supports tagged MAC frames (see 3.5) may similarly truncate frames longer than (maxUntaggedFrameSize + qTagPrefix-Size) octets in length, and report this event as an (implementation-dependent) error.

b) *Integer Number of Octets in Frame.* Since the format of a valid frame specifies an integer number of octets, only a collision or an error can produce a frame with a length that is not an integer multiple of 8 bits. Complete frames (that is, not rejected for being too small) that do not contain an integer number of octets are truncated to the nearest octet boundary. If frame check sequence validation detects an error in such a frame, the status code alignmentError is reported

4A.2.5 Preamble generation

In a LAN implementation, most of the Physical Layer components are allowed to provide valid output some number of bit times after being presented valid input signals. Thus it is necessary for a preamble to be sent before the start of data, to allow the PLS circuitry to reach its steady state. Upon request by TransmitLinkMgmt to transmit the first bit of a new frame, BitTransmitter shall first transmit the preamble, a bit sequence used for physical medium stabilization and synchronization, followed by the Start Frame Delimiter. The preamble pattern is:

10101010 10101010 10101010 10101010 10101010 10101010 10101010

The bits are transmitted in order, from left to right. The nature of the pattern is such that, for Manchester encoding, it appears as a periodic waveform on the medium that enables bit synchronization. It should be noted that the preamble ends with a 0.

4A.2.6 Start frame sequence

The receiveDataValid signal is the indication to the MAC that the frame reception process should begin. Upon reception of the sequence 10101011 following the assertion of receiveDataValid, PhysicalSignalDecap shall begin passing successive bits to ReceiveLinkMgmt for passing to the MAC client.

4A.2.7 Global declarations

This subclause provides detailed formal specifications for the MAC sublayer. It is a specification of generic features and parameters to be used in systems implementing this media access method. 4A.4 provides values for these sets of parameters for recommended implementations of this media access mechanism.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 576 of 717

4A.2.7.1 Common constants, types, and variables

The following declarations of constants, types and variables are used by the frame transmission and reception sections of each MAC sublayer:

```
const
   addressSize = 48; {In bits, in compliance with 3.2.3}
   lengthOrTypeSize = 16; {In bits}
   clientDataSize = ...; {In bits, size of MAC client data; see 4A.2.2.2, a) 3)}
   padSize = ...; {In bits, = max (0, minFrameSize — (2 x addressSize + lengthOrTypeSize +
                                                    clientDataSize + crcSize))}
   dataSize = ...; {In bits, = clientDataSize + padSize}
   crcSize = 32; {In bits, 32-bit CRC}
   frameSize = ...; {In bits, = 2 x addressSize + lengthOrTypeSize + dataSize + crcSize; see 4A.2.2.2, a)}
   minFrameSize = ...; {In bits, implementation-dependent, see 4A.4}
   maxUntaggedFrameSize = ...; {In octets, implementation-dependent, see 4A.4}
   qTagPrefixSize = 4; {In octets, length of QTag Prefix, see 3.5}
   minTypeValue = 1536; {Minimum value of the Length/Type field for Type interpretation}
   maxValidFrame = maxUntaggedFrameSize — (2 x addressSize + lengthOrTypeSize + crcSize) / 8;
                   {In octets, the maximum length of the MAC client data field. This constant is
                   defined for editorial convenience, as a function of other constants}
   preambleSize = 56; {In bits, see 4A.2.5}
   sfdSize = 8; {In bits, start frame delimiter}
   headerSize = 64; {In bits, sum of preambleSize and sfdSize}
type
   Bit = (0, 1);
   AddressValue = array [1..addressSize] of Bit;
   LengthOrTypeValue = array [1..lengthOrTypeSize] of Bit;
   DataValue = array [1..dataSize] of Bit; {Contains the portion of the frame that starts with the first bit
                                            following the Length/Type field and ends with the last bit
                                            prior to the FCS field. For VLAN Tagged frames, this value
                                            includes the Tag Control Information field and the original
                                            MAC client Length/Type field. See 3.5}
   CRCValue = array [1..crcSize] of Bit;
   PreambleValue = array [1..preambleSize] of Bit;
   SfdValue = array [1..sfdSize] of Bit;
   ViewPoint = (fields, bits); {Two ways to view the contents of a frame}
   HeaderViewPoint = (headerFields, headerBits);
   Frame = record {Format of Media Access frame}
      case view: ViewPoint of
         fields: (
            destinationField: AddressValue;
            sourceField: AddressValue;
            lengthOrTypeField: LengthOrTypeValue;
            dataField: DataValue;
            fcsField: CRCValue);
         bits: (contents: array [1..frameSize] of Bit)
      end; {Frame}

   Header = record {Format of preamble and start frame delimiter}
      case headerView: HeaderViewPoint of
         headerFields: (
            preamble: PreambleValue;
            sfd: SfdValue);
         headerBits: (headerContents: array [1..headerSize] of Bit)
      end; {Defines header for MAC frame}
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 577 of 717

4A.2.7.2 Transmit state variables

The following items are specific to frame transmission. (See also 4A.4.)

```
const
    interFrameSpacing = ...; {In bit times, minimum gap between frames. Equal to interFrameGap, see
                              4A.4}
var
    outgoingFrame: Frame; {The frame to be transmitted}
    outgoingHeader: Header;
    currentTransmitBit, lastTransmitBit: 1..frameSize; {Positions of current and last outgoing bits in
                                                        outgoingFrame}
    lastHeaderBit: 1..headerSize;
    deferring: Boolean; {Implies any pending transmission must wait for the physical layer to be ready for
                         the next packet and for the interframe spacing}
    deferenceMode: Boolean; {Indicates the desired mode of operation, and enables waiting for interframe
                             spacing during the deference process}
    carrierSenseMode: Boolean; {Indicates the desired mode of operation, and enables using carrierSense
                                to extend deference due to congestion in the PHY}
```

4A.2.7.3 Receive state variables

The following items are specific to frame reception. (See also 4A.4.)

```
var
    incomingFrame: Frame; {The frame being received}
    receiving: Boolean; {Indicates that a frame reception is in progress}
    excessBits: 0..7; {Count of excess trailing bits beyond octet boundary}
    receiveSucceeding: Boolean; {Running indicator of whether reception is succeeding}
    validLength: Boolean; {Indicator of whether received frame has a length error}
    exceedsMaxLength: Boolean; {Indicator of whether received frame has a length longer than the
                                maximum permitted length}
    passReceiveFCSMode: Boolean; {Indicates the desired mode of operation, and enables passing of
                                  the frame check sequence field of all received frames from the
                                  MAC sublayer to the MAC client. passReceiveFCSMode is a
                                  static variable}
```

4A.2.7.4 Summary of interlayer interfaces

a) The interface to the MAC client, defined in 4A.3.2, is summarized below:

```
type
    TransmitStatus = (transmitDisabled, transmitOK, excessiveCollisionError, lateCollisionErrorStatus);
                     {Result of TransmitFrame operation, the values excessiveCollisionError and
                       lateCollisionError are never generated by this MAC but maintained here as
                       artifacts of the original CSMA/CD MAC}
    ReceiveStatus = (receiveDisabled, receiveOK, frameTooLong, frameCheckError, lengthError,
                     alignmentError); {Result of ReceiveFrame operation}
function TransmitFrame (
    destinationParam: AddressValue;
    sourceParam: AddressValue;
    lengthOrTypeParam: LengthOrTypeValue;
    dataParam: DataValue;
    fcsParamValue: CRCValue;
    fcsParamPresent: Bit): TransmitStatus;  {Transmits one frame}
function ReceiveFrame (
    var destinationParam: AddressValue;
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 578 of 717

```
    var sourceParam: AddressValue;
    var lengthOrTypeParam: LengthOrTypeValue;
    var dataParam: DataValue;
    var fcsParamValue: CRCValue;
    var fcsParamPresent: Bit): ReceiveStatus; {Receives one frame}
```

b) The interface to the Physical Layer, defined in 4A.3.3, is summarized in the following:

```
var
    receiveDataValid: Boolean; {Indicates incoming bits}
    carrierSense: Boolean; {Indicates that physical layer is not ready for the next packet and that
                            transmission should defer}
    transmitting: Boolean; {Indicates outgoing bits}
    collisionDetect: Boolean; {Unused by this MAC but maintained as an artifact of the CSMA/CD MAC}
procedure TransmitBit (bitParam: Bit); {Transmits one bit}
function ReceiveBit: Bit; {Receives one bit}
procedure Wait (bitTimes: integer); {Waits for indicated number of bit times}
```

4A.2.7.5 State variable initialization

The procedure Initialize must be run when the MAC sublayer begins operation, before any of the processes begin execution. Initialize sets certain crucial shared state variables to their initial values. (All other global variables are appropriately reinitialized before each use.) Initialize then waits for the medium to be idle, and starts operation of the various processes.

NOTE—Care should be taken to ensure that the time from the completion of the Initialize process to when the first packet transmission begins is at least an interFrameGap.

If Layer Management is implemented, the Initialize procedure shall only be called as the result of the initializeMAC action (30.3.1.2.1).

```
procedure Initialize;
begin
    deferring := false;
    transmitting := false; {An interface to Physical Layer; see below}
    receiving := false;
    passReceiveFCSMode := ...; {True when enabling the passing of the frame check sequence of all
                                received frames from the MAC sublayer to the MAC client is desired and
                                supported, false otherwise}
    deferenceMode := ...; {False for implementations that cannot rely on deference within the MAC to
                           provide an interframe gap, true otherwise}
    carrierSenseMode := ...; {True for implementations that use carrierSense to indicate congestion in the
                              PHY, false otherwise.}
    while ((carrierSenseMode and carrierSense) or receiveDataValid) do nothing
    {Start execution of all processes}
end; {Initialize}
```

4A.2.8 Frame transmission

The algorithms in this subclause define MAC sublayer frame transmission. The function TransmitFrame implements the frame transmission operation provided to the MAC client:

```
function TransmitFrame (
    destinationParam: AddressValue;
    sourceParam: AddressValue;
    lengthOrTypeParam: LengthOrTypeValue;
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 579 of 717

```
    dataParam: DataValue;
    fcsParamValue: CRCValue;
    fcsParamPresent: Bit): TransmitStatus;
  procedure TransmitDataEncap; {Nested procedure; see body below}
  begin
    if transmitEnabled then
      begin
        TransmitDataEncap;
        TransmitFrame := TransmitLinkMgmt
      end
    else TransmitFrame := transmitDisabled
  end; {TransmitFrame}
```

If transmission is enabled, TransmitFrame calls the internal procedure TransmitDataEncap to construct the frame. Next, TransmitLinkMgmt is called to perform the actual transmission. The TransmitStatus returned indicates the success or failure of the transmission attempt.

TransmitDataEncap builds the frame and places the 32-bit CRC in the frame check sequence field:

```
  procedure TransmitDataEncap;
  begin
    with outgoingFrame do
      begin {Assemble frame}
        view := fields;
        destinationField := destinationParam;
        sourceField := sourceParam;
        lengthOrTypeField := lengthOrTypeParam;
        if fcsParamPresent then
          begin
            dataField := dataParam; {No need to generate pad if the FCS is passed from MAC client}
            fcsField := fcsParamValue {Use the FCS passed from MAC client}
          end
        else
          begin
            dataField := ComputePad(dataParam);
            fcsField := CRC32(outgoingFrame)
          end;
        view := bits
      end {Assemble frame}
    with outgoingHeader do
      begin
        headerView := headerFields;
        preamble := ...; {* '1010...10,' LSB to MSB*}
        sfd := ...; {* '10101011,' LSB to MSB*}
        headerView := headerBits
      end
  end; {TransmitDataEncap}
```

If the MAC client chooses to generate the frame check sequence field for the frame, it passes this field to the MAC sublayer via the fcsParamValue parameter. If the fcsParamPresent parameter is true, TransmitDataEncap uses the fcsParamValue parameter as the frame check sequence field for the frame. Such a frame shall not require any padding, since it is the responsibility of the MAC client to ensure that the frame meets the minFrameSize constraint. If the fcsParamPresent parameter is false, the fcsParamValue

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 580 of 717

parameter is unspecified. TransmitDataEncap first calls the ComputePad function, followed by a call to the CRC32 function to generate the padding (if necessary) and the frame check sequence field for the frame internally to the MAC sublayer.

ComputePad appends an array of arbitrary bits to the MAC client data to pad the frame to the minimum frame size:

```
function ComputePad(var dataParam: DataValue): DataValue;
begin
   ComputePad := {Append an array of size padSize of arbitrary bits to the MAC client dataField}
end; {ComputePad}
```

TransmitLinkMgmt attempts to transmit the frame. When deferenceMode is true, it first defers to the physical layer if it is not ready for the next packet and to ensure proper interframe spacing. When deferenceMode is false, it begins transmitting immediately:

```
function TransmitLinkMgmt: TransmitStatus;
begin
   while deferring do nothing {Defer to physical layer congestion and IFS}
   StartTransmit;
   while transmitting do nothing
   LayerMgmtTransmitCounters; {Update transmit and transmit error counters in 5.2.4.2}
   TransmitLinkMgmt := transmitOK
end; {TransmitLinkMgmt}
```

Each time a frame transmission attempt is initiated, StartTransmit is called to alert the BitTransmitter process that bit transmission should begin:

```
procedure StartTransmit;
begin
   currentTransmitBit := 1;
   lastTransmitBit := frameSize;
   lastHeaderBit:= headerSize;
   transmitting := true
end; {StartTransmit}
```

The Deference process runs asynchronously to continuously compute the proper value for the variable deferring:

```
process Deference;
begin
   cycle {Main loop}
      while (not transmitting and not (carrierSenseMode and carrierSense)) do nothing; {Wait for the start
                                                                                        of transmission or congestion}
      deferring := true; {Inhibit future transmissions}
      while (transmitting or (carrierSenseMode and carrierSense)) do nothing; {Wait for the end of
                                                                               transmission and congestion}
      if deferenceMode then Wait(interFrameSpacing); {Time out entire interframe gap if enabled}
      deferring := false {Don't inhibit transmission}
   end {Main loop}
end; {Deference}
```

The BitTransmitter process runs asynchronously, transmitting bits at a rate determined by the Physical Layer's TransmitBit operation:

```
process BitTransmitter;
begin
   cycle {Outer loop}
      if transmitting then
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 581 of 717

```
            begin {Inner loop}
               while (currentTransmitBit ≤ lastHeaderBit) do
                  begin
                     TransmitBit(outgoingHeader[currentTransmitBit]);
                     currentTransmitBit := currentTransmitBit + 1
                  end;
               currentTransmitBit := 1;
               while transmitting do
                  begin
                     TransmitBit(outgoingFrame[currentTransmitBit]);
                     currentTransmitBit := currentTransmitBit + 1;
                     transmitting := (currentTransmitBit ≤ lastTransmitBit)
                  end
            end {Inner loop}
      end {Outer loop}
   end; {BitTransmitter}
```

4A.2.9 Frame reception

The algorithms in this subclause define the MAC sublayer frame reception.

The function ReceiveFrame implements the frame reception operation provided to the MAC client:

```
   function ReceiveFrame (
      var destinationParam: AddressValue;
      var sourceParam: AddressValue;
      var lengthOrTypeParam: LengthOrTypeValue;
      var dataParam: DataValue;
      var fcsParamValue: CRCValue;
      var fcsParamPresent: Bit): ReceiveStatus;

   function ReceiveDataDecap: ReceiveStatus; {Nested function; see body below}
   begin
      if receiveEnabled then
         repeat
            ReceiveLinkMgmt;
            ReceiveFrame := ReceiveDataDecap;
         until receiveSucceeding
      else ReceiveFrame := receiveDisabled
   end; {ReceiveFrame}
```

If enabled, ReceiveFrame calls ReceiveLinkMgmt to receive the next valid frame, and then calls the internal function ReceiveDataDecap to return the frame's fields to the MAC client if the frame's address indicates that it should do so. The returned ReceiveStatus indicates the presence or absence of detected transmission errors in the frame.

```
   function ReceiveDataDecap: ReceiveStatus;
      var status: ReceiveStatus; {Holds receive status information}
   begin
      with incomingFrame do
         begin
            view := fields;
            receiveSucceeding := LayerMgmtRecognizeAddress(destinationField);
            if receiveSucceeding then
               begin {Disassemble frame}
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 582 of 717

```
                destinationParam := destinationField;
                sourceParam := sourceField;
                lengthOrTypeParam := lengthOrTypeField;
                dataParam := RemovePad(lengthOrTypeField, dataField);
                fcsParamValue := fcsField;
                fcsParamPresent := passReceiveFCSMode;
                exceedsMaxLength := ...; {Check to determine if receive frame size exceeds the maximum
                                          permitted frame size. MAC implementations may use either
                                          maxUntaggedFrameSize or (maxUntaggedFrameSize +
                                          qTagPrefixSize) for the maximum permitted frame size,
                                          either as a constant or as a function of whether the frame being
                                          received is a basic or tagged frame (see 3.2, 3.5). In
                                          implementations that treat this as a constant, it is recommended
                                          that the larger value be used. The use of the smaller value
                                          in this case may result in valid tagged frames exceeding the
                                          maximum permitted frame size.}
                if exceedsMaxLength then status := frameTooLong
                else if fcsField = CRC32(incomingFrame) then
                        if validLength then status := receiveOK else status := lengthError
                else if excessBits = 0 then status := frameCheckError
                else status := alignmentError;
                LayerMgmtReceiveCounters(status); {Update receive counters in 5.2.4.3}
                view := bits
            end {Disassemble frame}
        end; {With incomingFrame}
    ReceiveDataDecap := status
end; {ReceiveDataDecap}

function LayerMgmtRecognizeAddress(address: AddressValue): Boolean;
begin
    if {promiscuous receive enabled} then LayerMgmtRecognizeAddress := true;
    else if address = ... {MAC station address} then LayerMgmtRecognizeAddress := true;
    else if address = ... {Broadcast address} then LayerMgmtRecognizeAddress := true;
    else if address = ... {One of the addresses on the multicast list and multicast reception is enabled} then
                                                        LayerMgmtRecognizeAddress := true;
    else LayerMgmtRecognizeAddress := false
end; {LayerMgmtRecognizeAddress}
```

The function RemovePad strips any padding that was generated to meet the minFrameSize constraint, if possible. When the MAC sublayer operates in the mode that enables passing of the frame check sequence field of all received frames to the MAC client (passReceiveFCSMode variable is true), it shall not strip the padding and it shall leave the data field of the frame intact. Length checking is provided for Length interpretations of the Length/Type field. For Length/Type field values in the range between maxValidFrame and minTypeValue, the behaviour of the RemovePad function is unspecified:

```
function RemovePad(var lengthOrTypeParam: LengthOrTypeValue; dataParam: DataValue): DataValue;
begin
    if lengthOrTypeParam ≥ minTypeValue then
        begin
            validLength := true; {Don't perform length checking for Type field interpretations}
            RemovePad := dataParam
        end
    else if lengthOrTypeParam ≤ maxValidFrame then
        begin
            validLength := {For length interpretations of the Length/Type field, check to determine if value
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 583 of 717

```
                                represented by Length/Type field matches the received clientDataSize};
            if validLength and not passReceiveFCSMode then
               RemovePad := {Truncate the dataParam (when present) to the value represented by the
                                lengthOrTypeParam (in octets) and return the result}
            else RemovePad := dataParam
         end
   end; {RemovePad}
```

ReceiveLinkMgmt attempts repeatedly to receive the bits of a frame, discarding any fragments smaller than the minimum valid frame size:

```
   procedure ReceiveLinkMgmt;
   begin
      repeat
         StartReceive;
         while receiving do nothing; {Wait for frame to finish arriving}
         excessBits := frameSize mod 8;
         frameSize := frameSize – excessBits; {Truncate to octet boundary}
         receiveSucceeding := (frameSize ≥ minFrameSize) {Reject frames too small}
      until receiveSucceeding
   end; {ReceiveLinkMgmt}

   procedure StartReceive;
   begin
      receiving := true
   end; {StartReceive}
```

The BitReceiver process runs asynchronously, receiving bits from the medium at the rate determined by the Physical Layer's ReceiveBit operation, partitioning them into frames, and optionally receiving them:

```
   process BitReceiver;
      var   b: Bit;
            currentReceiveBit: 1..frameSize; {Position of current bit in incomingFrame}
   begin
      cycle {Outer loop}
         if receiveEnabled then
            begin {Receive next frame from physical layer}
               currentReceiveBit := 1;
               PhysicalSignalDecap; {Skip idle, strip off preamble and sfd}
               while receiveDataValid do
                  begin {Inner loop to receive the rest of an incoming frame}
                     b := ReceiveBit; {Next bit from physical medium}
                     if receiving then {Append to frame}
                     begin
                        incomingFrame[currentReceiveBit] := b;
                        currentReceiveBit := currentReceiveBit + 1
                     end; {append bit to frame}
                     receiving := receiveDataValid
                  end; {Inner loop}
               frameSize := currentReceiveBit – 1
            end {Enabled}
      end {Outer loop}
   end; {BitReceiver}

   procedure PhysicalSignalDecap;
   begin
      {Receive one bit at a time from physical medium until a valid sfd is detected, discard bits and return.}
   end; {PhysicalSignalDecap}
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 584 of 717

4A.2.10 Common procedures

The function CRC32 is used by both the transmit and receive algorithms to generate a 32-bit CRC value:

```
function CRC32(f: Frame): CRCValue;
begin
   CRC32 := {The 32-bit CRC for the entire frame as defined in 3.2.8, excluding the FCS field (if
            present)}
end; {CRC32}
```

Purely to enhance readability, the following procedure is also defined:

```
procedure nothing; begin end;
```

The idle state of a process (that is, while waiting for some event) is cast as repeated calls on this procedure.

4A.3 Interfaces to/from adjacent layers

4A.3.1 Overview

The purpose of this clause is to provide precise definitions of the interfaces between the architectural layers defined in Clause 1 in compliance with the Media Access Service Specification given in Clause 2. In addition, the services required from the physical medium are defined.

The notation used here is the Pascal language, in keeping with the procedural nature of the precise MAC sublayer specification (see 4A.2). Each interface is described as a set of procedures or shared variables, or both, that collectively provide the only valid interactions between layers. The accompanying text describes the meaning of each procedure or variable and points out any implicit interactions among them.

The description of the interfaces in Pascal is a notational technique, and in no way implies that they can or should be implemented in software. This point is discussed more fully in 4A.2, that provides complete Pascal declarations for the data types used in the remainder of this clause. The synchronous (one frame at a time) nature of the frame transmission and reception operations is a property of the architectural interface between the MAC client and MAC sublayers, and need not be reflected in the implementation interface between a station and its sublayer.

4A.3.2 Services provided by the MAC sublayer

The services provided to the MAC client by the MAC sublayer are transmission and reception of frames. The interface through which the MAC client uses the facilities of the MAC sublayer therefore consists of a pair of functions.

Functions:

TransmitFrame

ReceiveFrame

Each of these functions has the components of a frame as its parameters (input or output), and returns a status code as its result.

NOTES

1—The frame_check_sequence parameter defined in 2.3.1 and 2.3.2 is mapped here into two variables: fcsParamValue and fcsParamPresent. This mapping has been defined for editorial convenience. The fcsParamPresent variable indicates the presence or absence of the fcsParamValue variable in the two function calls. If the fcsParamPresent variable is true, the fcsParamValue variable contains the frame check sequence for the corresponding frame. If the fcsParamPresent variable is false, the fcsParamValue variable is unspecified. If the MAC sublayer does not support client-supplied frame check sequence values, then the fcsParamPresent variable in TransmitFrame shall always be false.

2—The mac_service_data_unit parameter defined in 2.3.1 and 2.3.2 is mapped here into two variables: lengthOrTypeParam and dataParam. This mapping has been defined for editorial convenience. The first two octets of the mac_service_data_unit parameter contain the lengthOrTypeParam variable. The remaining octets of the mac_service_data_unit parameter form the dataParam variable.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 585 of 717

The MAC client transmits a frame by invoking TransmitFrame:

function TransmitFrame (
destinationParam: AddressValue;
sourceParam: AddressValue;
lengthOrTypeParam: LengthOrTypeValue;
dataParam: DataValue;
fcsParamValue: CRCValue;
fcsParamPresent: Bit): TransmitStatus;

The TransmitFrame operation is synchronous. Its duration is the entire attempt to transmit the frame; when the operation completes, transmission has either succeeded or failed, as indicated by the resulting status code:

type TransmitStatus = (transmitDisabled, transmitOK, excessiveCollisionError,
lateCollisionErrorStatus*);*

The transmitDisabled status code indicates that the transmitter is not enabled. Successful transmission is indicated by the status code transmitOK. The codes excessiveCollisionError and lateCollisionErrorStatus are artifacts of the CSMA/CD MAC and maintained here for historical purposes. These codes are never generated by this full duplex MAC. TransmitStatus is not used by the service interface defined in 2.3.1. TransmitStatus may be used in an implementation dependent manner.

The MAC client accepts incoming frames by invoking ReceiveFrame:

function ReceiveFrame (
var destinationParam: AddressValue;
var sourceParam: AddressValue;
var lengthOrTypeParam: LengthOrTypeValue;
var dataParam: DataValue;
var fcsParamValue: CRCValue;
var fcsParamPresent: Bit): ReceiveStatus;

The ReceiveFrame operation is synchronous. The operation does not complete until a frame has been received. The fields of the frame are delivered via the output parameters with a status code:

type ReceiveStatus = (receiveDisabled, receiveOK, frameTooLong, frameCheckError,
lengthError, alignmentError);

The receiveDisabled status indicates that the receiver is not enabled. Successful reception is indicated by the status code receiveOK. The frameTooLong error indicates that a frame was received whose frameSize was beyond the maximum allowable frame size. The code frameCheckError indicates that the frame received was damaged by a transmission error. The lengthError indicates that the lengthOrTypeParam value was both consistent with a length interpretation of this field (i.e., its value was less than or equal to maxValidFrame), and inconsistent with the frameSize of the received frame. The code alignmentError indicates that the frame received was damaged, and that in addition, its length was not an integer number of octets. ReceiveStatus is not mapped to any MAC client parameter by the service interface defined in 2.3.2. ReceiveStatus may be used in an implementation dependent manner.

The maxValidFrame represents the maximum number of octets that can be carried in the MAC client data field of a frame and is a constant, regardless of whether the frame is a basic or tagged frame (see 3.2 and 3.5). The maximum length of a frame (including all fields from the Destination address through the FCS, inclusive) is either maxUntaggedFrameSize (for basic frames) or maxUntaggedFrameSize + qTagPrefix-Size, for tagged frames.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 586 of 717

4A.3.3 Services required from the physical layer

The interface through which the MAC sublayer uses the facilities of the Physical Layer consists of a function, a pair of procedures and four Boolean variables as described in Table 4A–1.

Table 4A–1—Full duplex MAC functions, procedures and variables

Function	Procedures	Variables
ReceiveBit	**TransmitBit**	**collisionDetect**
	Wait	**carrierSense**
		receiveDataValid
		transmitting

During transmission, the contents of an outgoing frame are passed from the MAC sublayer to the Physical Layer by way of repeated use of the TransmitBit operation:

procedure TransmitBit (bitParam: Bit);

Each invocation of TransmitBit passes one new bit of the outgoing frame to the Physical Layer. The TransmitBit operation is synchronous. The duration of the operation is the entire transmission of the bit. The operation completes when the Physical Layer is ready to accept the next bit and it transfers control to the MAC sublayer.

The overall event of data being transmitted is signaled to the Physical Layer by way of the variable transmitting:

var transmitting: Boolean*;*

Before sending the first bit of a frame, the MAC sublayer sets transmitting to true, to inform the physical layer that a stream of bits will be presented via the TransmitBit operation. After the last bit of the frame has been presented, the MAC sublayer sets transmitting to false to indicate the end of the frame.

The collisionDetect variable is not used by this full duplex MAC but maintained as an artifact of the CSMA/CD MAC's interface to the physical layer.

var collisionDetect: Boolean*;*

During reception, the contents of an incoming frame are retrieved from the Physical Layer by the MAC sublayer via repeated use of the ReceiveBit operation:

function ReceiveBit: Bit;

Each invocation of ReceiveBit retrieves one new bit of the incoming frame from the Physical Layer. The ReceiveBit operation is synchronous. Its duration is the entire reception of a single bit. Upon receiving a bit, the MAC sublayer shall immediately request the next bit until all bits of the frame have been received (see 4A.2 for details).

The overall event of data being received is signaled to the MAC sublayer by the variable receiveDataValid:

var receiveDataValid: Boolean*;*

When the Physical Layer sets receiveDataValid to true, the MAC sublayer shall immediately begin retrieving the incoming bits by the ReceiveBit operation. When receiveDataValid subsequently becomes false, the MAC sublayer can begin processing the received bits as a completed frame. If an invocation of ReceiveBit is pending when receiveDataValid becomes false, ReceiveBit returns an undefined value, which should be discarded by the MAC sublayer (see 4A.2 for details).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 587 of 717

The overall event of congestion at the physical layer, indicating that the physical layer is not ready to accept the next packet, is signaled to the MAC sublayer by the variable carrierSense:

var carrierSense: Boolean*;*

When the value of variable carrierSenseMode is set to TRUE, the MAC sublayer shall monitor the value of carrierSense to defer its own transmissions when the physical layer is busy. The physical layer sets carrierSense to true immediately upon congestion within the physical layer. After the congestion ceases, carrierSense is set to false. When the value of variable carrierSenseMode is set to FALSE, the carrierSense variable is ignored by the MAC.

While the label carrierSense does not accurately describe the condition presented by this variable, the name is maintained as an artifact of the CSMA/CD MAC interface to the physical layer.

The Physical Layer also provides the procedure Wait:

procedure Wait (bitTimes: integer)*;*

This procedure waits for the specified number of bit times. This allows the MAC sublayer to measure time intervals in units of the (physical-medium-dependent) bit time.

4A.4 Specific implementations

4A.4.1 Compatibility overview

To provide total compatibility at all levels of the standard, it is required that each network component implementing the MAC sublayer procedure adheres rigidly to these specifications. The information provided in 4A.4.2 provides design parameters for specific implementations of this access method. Variations from these values result in a system implementation that violates the standard. See the warning in 4A.4.2.

4A.4.2 Allowable implementations

The parameter values shown in Table 4A–2 shall be used for their corresponding implementations:

Table 4A–2—Full duplex MAC parameter values

Parameters	Values
interFrameGap	**96 bits**
maxUntaggedFrameSize	**1518 octets**
minFrameSize	**512 bits (64 octets)**

The minimum interFrameGap shall be enforced in this sublayer, when the deferenceMode variable is set to TRUE, or outside this sublayer, when the deferenceMode variable is set to FALSE.

NOTES—

1—For 10 Mb/s implementations, the spacing between two successive non-colliding packets, from start of idle at the end of the first packet to start of preamble of the subsequent packet, can have a minimum value of 47 BT (bit times), at the AUI receive line of the DTE. This interFrameGap shrinkage is caused by variable network delays, added preamble bits, and clock skew.

2—For 1 Gb/s implementations, the spacing between two non-colliding packets, from the last bit of the FCS field of the first packet to the first bit of the preamble of the second packet, can have a minimum value of 64 BT (bit times), as measured at the GMII receive signals at the DTE. This interFrameGap shrinkage may be caused by variable network delays, added preamble bits, and clock tolerances.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 588 of 717

3—For 10 Gb/s implementations, the spacing between two packets, from the last bit of the FCS field of the first packet to the first bit of the preamble of the second packet, can have a minimum value of 40 BT (bit times), as measured at the XGMII receive signals at the DTE. This interFrameGap shrinkage may be caused by variable network delays and clock tolerances.

WARNING

Any deviation from the above specified values may affect proper operation of the network.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 589 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 590 of 717

Annex 22D

(informative)

Clause 22 access to Clause 45 MMD registers

Clause 22 provides access to registers in a Clause 45 MMD using Registers 13 and 14. This informative annex provides users with some insight how these registers can be utilized to access Clause 45 MMD registers. Accesses to Registers 13 and 14, for the purpose of accessing registers in a Clause 45 MMD, should be performed atomically to avoid the chance of another process changing the Function, DEVAD or address fields within the MMD. This is the same requirement of Clause 45 accesses.

22D.1 Write operation

To write a Clause 45 register using the Clause 22 access mechanism, perform the following accesses using the appropriate PHY address for the PHY of interest:

a) To Register 13, write the Function field to 00 (address) and DEVAD field to the device address value for the desired MMD;
b) To Register 14, write the desired address value to the MMD's address register;
c) To Register 13, write the Function field to 01 (Data, no post increment) and DEVAD field to the same device address value for the desired MMD;
d) To Register 14, write the content of the MMD's selected register.

Step a) and Step b) can be skipped if the MMD's address register was previously configured.

22D.2 Read operation

To read a Clause 45 register using the Clause 22 access mechanism, perform the following accesses using the appropriate PHY address for the PHY of interest:

a) To Register 13, write the Function field to 00 (address) and DEVAD field to the device address value for the desired MMD;
b) To Register 14, write the desired address value to the MMD's address register;
c) To Register 13, write the Function field to 01 (Data, no post increment) and DEVAD field to the same device address value for the desired MMD;
d) From Register 14, read the content of the MMD's selected register.

Step a) and Step b) can be skipped if the MMD's address register was previously configured.

22D.3 MMD address operations

22D.3.1 Address

While the Function field contains the value 00 (address):

a) subsequent writes to Register 14 continue to rewrite MMD DEVAD's address register;
b) subsequent reads from Register 14 continue to reread MMD DEVAD's address register.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 591 of 717

22D.3.2 Data, no post increment

While the Function field contains the value 01 (Data, no post increment):

a) subsequent writes to Register 14 continue to rewrite the data register selected by the value in MMD DEVAD's address register;
b) subsequent reads from Register 14 continue to reread the data register selected by the value in MMD DEVAD's address register.

22D.3.3 Data, post increment on reads and writes

While the Function field contains the value 10 (Data, post increment on reads and writes):

a) subsequent writes to Register 14 write the next higher addressed data register selected by the value in MMD DEVAD's address register, i.e. MMD DEVAD's address register is incremented after each access;
b) subsequent reads from Register 14 read the next higher addressed data register selected by the value in MMD DEVAD's address register, i.e. MMD DEVAD's address register is incremented after each access.

22D.3.4 Data, post increment on writes only

While the Function field contains the value 11 (Data, post increment on writes only):

a) subsequent writes to Register 14 write the next higher addressed data register selected by the value in MMD DEVAD's address register, i.e. MMD DEVAD's address register is incremented after each access;
b) subsequent reads from Register 14 continue to reread the data register selected by the value in MMD DEVAD's address register.

This Function enables a read-modify-write capability for successively addressed registers within a MMD.

22D.4 PHY Coexistence and bus conflict avoidance

There are multiple levels of coexistence on the MDIO bus:

a) PHYs accessible via the Clause 22 access mechanism can coexist on the same bus using different PHY address values;
b) Ports accessible via the Clause 45 access mechanism can coexist on the same bus using different port address values;
c) PHYs accessible via the Clause 22 access mechanism can coexist on the same bus with ports accessible via the Clause 45 access mechanism, even with identical PHY/port address values due to the different ST (start of frame) encodings of the frame structures (see 45A.3 and 45A.4, which discuss the need for protocol aware voltage translators for this type of coexistence);
d) MMDs accessible via the Clause 45 access mechanism with the same port address can coexist on the same bus using different device address values.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 592 of 717

Annex 58A

(informative)

Frame based testing

The use of the frame based test patterns described in Clause 58, Clause 59, and Clause 60 provides for the most general testing of the external interfaces. They combine patterns appropriate for testing the desired parameters with a flexible frame structure that allows the test pattern to be passed through a compliant system. However, the frame based nature of the patterns may cause difficulties with some bit oriented test systems if care is not taken.

The concern is that streams of data that are passed through a system under test may have their inter-frame gap altered by rate control mechanisms. This changes the bit sequence, even in the presence of no errors, and causes difficulties with bit sequence oriented test systems. There are several methods of addressing this issue. The solutions fall roughly into three categories:

a) Error detection internal to the equipment under test
b) Use of frame based test equipment
c) Synchronized systems

An example of the first type of test where the internal error detection would be used is a receiver sensitivity test. The input pattern may be generated by any method, including a bit oriented serial pattern generator or a frame based pattern generator. Errored frames would be rejected internal to the system under test based on FCS errors. This type of test has the advantage of testing all of the components of an input interface. The error count may be made by accessing the error counters internal to the system under test.

The number of bit errors may be assumed to be the same as the number of frame errors to a 90% confidence level as long as frame error ratio is less than 0.2. The bit error ratio may be determined by dividing the frame error ratio by the number of bits in the test frame that are used in the computation of the FCS.

If the internal error counters are not accessible, the test frames may be passed to an output port and the number of received frames may the counted. Any missing frames may be assumed to have had errors. The frame count may be made by conventional frame based test equipment. The missing frames render the use of bit stream oriented test equipment inappropriate.

When testing transmitter outputs, frames may be passed to the port under test from another port in the system under test. In this case, loss of frames within the system is not expected and testing may be done using a bit oriented test system by making the system synchronous. This may be done by recovering the clock from the output under test and using this as a clock source for the input. If there are no variable delays in the system under test, such as variable queuing delays, the input data stream will be reproduced in the output and conventional Bit Error Ratio Testing (BERT) systems may be used. In the case of 100BASE-X, the output bit stream may be inverted.

Two frame based alternatives avoid the need for synchronization. The first is to use a frame based tester for both the pattern generation and the error detection. The optical signal will need to be received by an optical receiver with the proper characteristics for the specific test. The processed data stream would then be sent to the frame based receiver to determine possible frame errors.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 593 of 717

Another method would be to use a bit oriented test system suitable for burst mode operation. This type of tester will examine only the frame contents for errors. Two methods are used for determining the frame contents. An external gating signal may be used. This must be triggered by the data source and include any latency associated with the system under test. Alternately, the test set may recognize the frame boundaries in the incoming data stream.

As the behaviour above the MAC is not specified by this standard, the system under test might not be able to forward, return or respond to incoming frames at line rate. Diluting the frame rate is thought to be acceptable for 1000BASE-X but for 100BASE-X testing, groups of 12 frames should be kept together. A system might emit additional frames from a port and may need to be configured so that it does not.

NOTE—Users are advised to take care that the system under test is not connected to a network in service.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 594 of 717

Annex 61A

(informative)

EFM Copper examples

61A.1 Purpose and scope

The purpose of this informative annex is to provide practical examples of the use of

a) Aggregation Discovery, for aggregated operation of 10PASS-TS PHYs (Clause 62) or 2BASE-TL PHYs (Clause 63); see 61A.2.
b) 64/65-octet encapsulation, as specified in 61.3.3; see 61A.3.

61A.2 Aggregation Discovery example

An example procedure for PME aggregation discovery is described for system components as shown in Figure 61A–1, connected as in Figure 61A–2. Additional information on example discovery transactions are shown in Figure 61A–3.An example procedure for discovering this connectivity follows:

a) -O system writes remote_discovery_register to value *alpha* (*alpha* may be any 48-bit value, but would benefit from being locally unique e.g. MAC address) using PME-1.
b) -O system reads remote_discovery_register for all other PMEs.
c) -O system discovers that PME-2, PME-6 and PME-7 are associated with the same remote MAC device as PME-1.
d) -O system writes remote_discovery_register to value *alpha* using PME-3 - the next non-associated PME.
e) -O system reads remote_discovery_register for all other PMEs.
f) -O system expects that PME-1, PME-2, PME-3, PME-6 and PME-7 will already be written to value *alpha*.
g) -O system discovers that no other PME is associated with the same remote MAC device as PME-3.
h) -O system writes remote_discovery_register to value *alpha* using PME-4 - the next non-associated PME.
i) -O system reads remote_discovery_register for all other PMEs.
j) -O system expects that PME-1, PME-2, PME-3, PME-4, PME-6 and PME-7 will already be written to value *alpha*.
k) -O system discovers that PME-5, PME-9 and PME-11 are associated with the same remote MAC device as PME-4.
l) This procedure repeats for all of the PMEs connected to -O system.

An alternate example procedure for discovering this connectivity uses two different 48-bit values:

a) -O system writes remote_discovery_register to value *alpha* (*alpha* may be any 48-bit value, but would benefit from being locally unique e.g. MAC address) using PME-1.
b) -O system reads remote_discovery_register for all other PMEs.
c) -O system discovers that PME-2, PME-6 and PME-7 are associated with the same remote MAC device as PME-1.
d) -O system rewrites remote_discovery_register to value *beta* (*beta* may be any 48-bit value, different to *alpha*) using PME-1.
e) -O system writes remote_discovery_register to value *alpha* using PME-3 - the next non-associated PME.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 595 of 717

f) -O system reads remote_discovery_register for all other PMEs.
g) -O system discovers that no other PME is associated with the same remote MAC device as PME-3.
h) -O system rewrites remote_discovery_register to value *beta* using PME-3.
i) -O system writes remote_discovery_register to value *alpha* using PME-4 - the next non-associated PME.
j) -O system reads remote_discovery_register for all other PMEs.
k) -O system discovers that PME-5, PME-9 and PME-11 are associated with the same remote MAC device as PME-4.
l) -O system rewrites remote_discovery_register to value *beta* using PME-4.
m) This procedure repeats for all of the PMEs connected to -O system.

NOTE— This procedure can be expanded at the -O end to provide up to 32 unique alpha values. The -O end would then write a different alpha value on each port and then read all remote_discovery_register. Since the write operation is an atomic write, only one alpha value for each remote PCS will be written. All other subsequent write operations on that PCS will fail.

Observe also that a large and complex -O system may perform multiple discovery operations in parallel by using multiple unique 48-bit values for writing the remote_discovery_register.

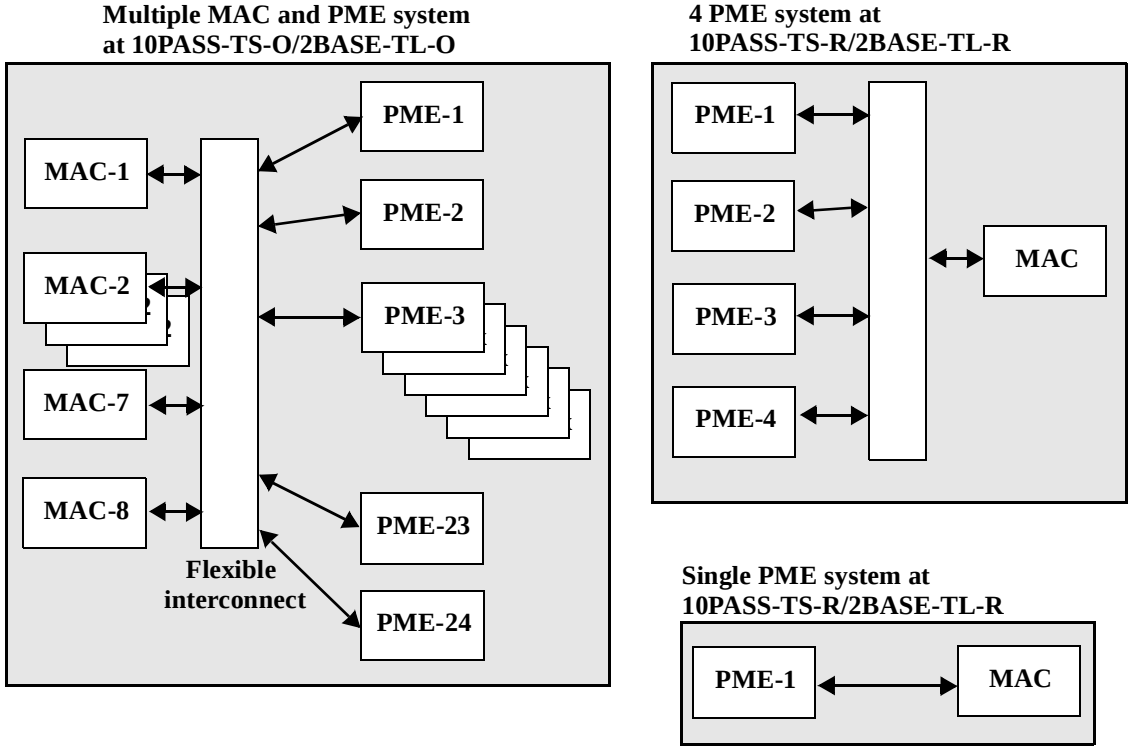


Figure 61A–1—Example systems for discovery

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 596 of 717

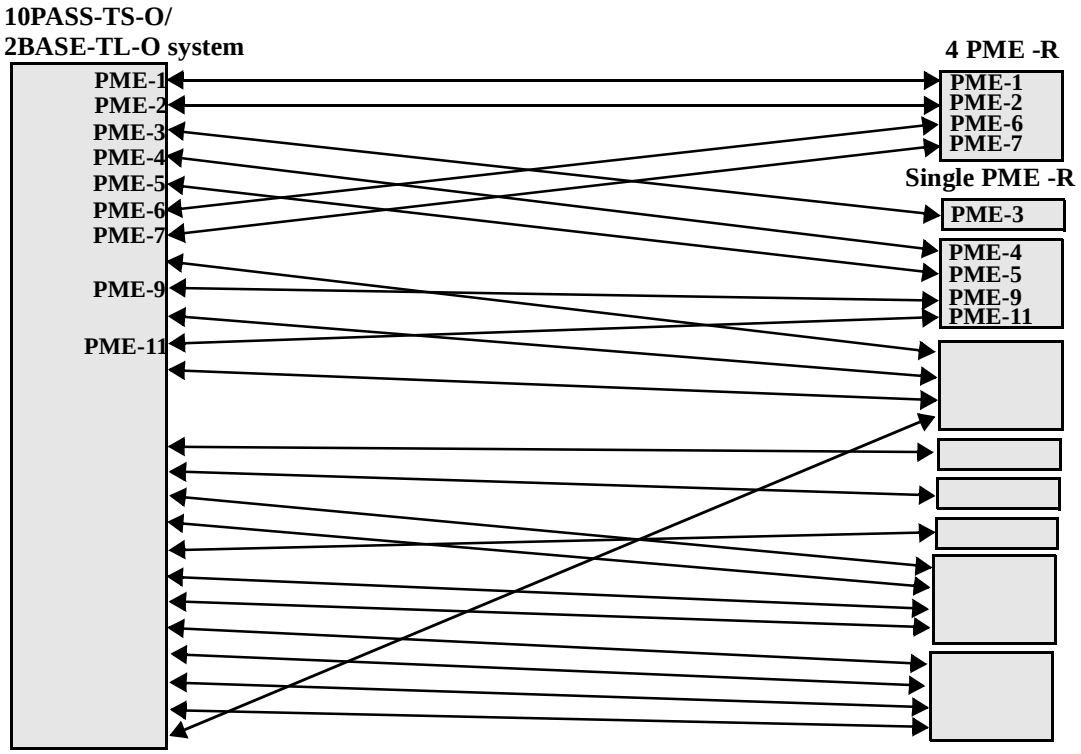


Figure 61A–2—System connectivity for discovery example

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 597 of 717

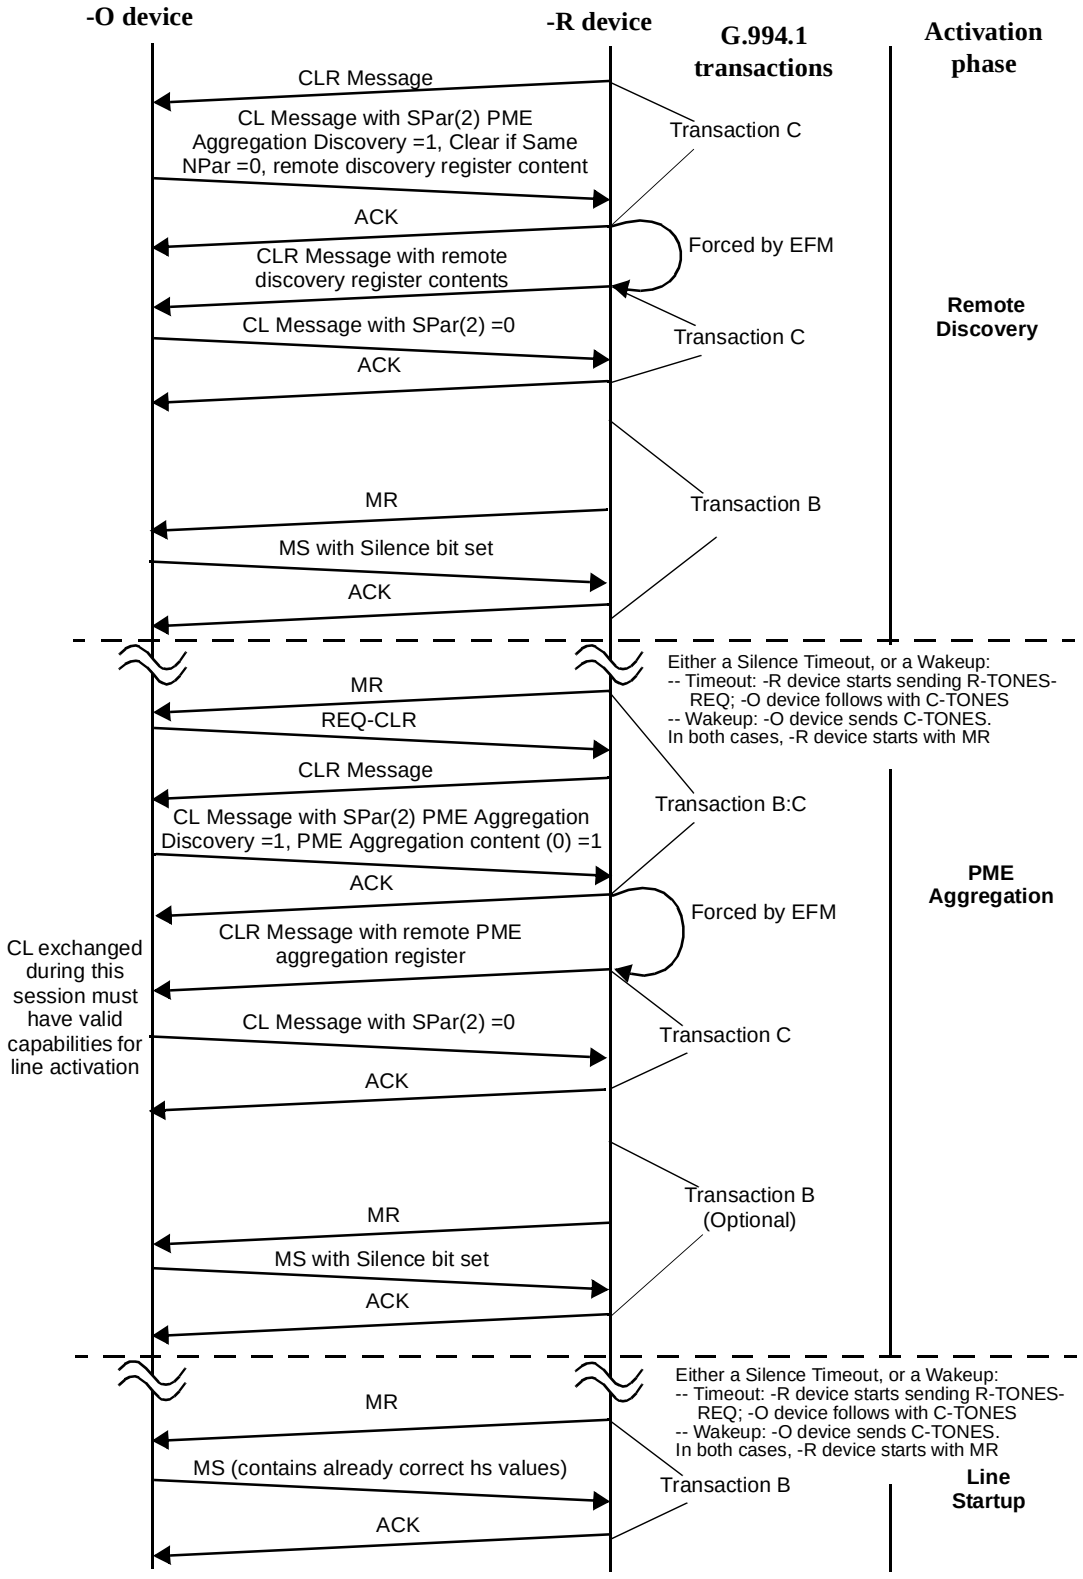


Figure 61A–3—Example activation sequence example

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 598 of 717

61A.3 Example of 64/65-octet encapsulation

The code below (Equation (61A–1)) consists of an example “C” implementation of the 64/65-octet encapsulation specified in 61.3.3.

NOTE—The example implementation operates under the assumption that the receiver is synchronized at all times.

```
/*
*   802.3ah (EFM) 2BASE-TL (SHDSL) TC Transmitter simulator from 61.2.3
*/

#include <stdio.h>

/* test frame data */
char p0[] = {0x00, 0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x07,
 0x08, 0x09, 0x0a, 0x0b, 0x0c, 0x0d, 0x0e, 0x0f,
 0x10, 0x11, 0x12, 0x13, 0x14, 0x15, 0x16, 0x17,
 0x18, 0x19, 0x1a, 0x1b, 0x1c, 0x1d, 0x1e, 0x1f,
 0x20, 0x21, 0x22, 0x23, 0x24, 0x25, 0x26, 0x27,
 0x28, 0x29, 0x2a, 0x2b, 0x2c, 0x2d, 0x2e, 0x2f,
 0x30, 0x31, 0x32, 0x33, 0x34, 0x35, 0x36, 0x37,
 0x38, 0x39, 0x3a, 0x3b, 0x3c, 0x3d, 0x3e, 0x3f};

char p1[] = {0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47,
 0x48, 0x49, 0x4a, 0x4b, 0x4c, 0x4d, 0x4e, 0x4f,
 0x50, 0x51, 0x52, 0x53, 0x54, 0x55, 0x56, 0x57,
 0x58, 0x59, 0x5a, 0x5b, 0x5c, 0x5d, 0x5e, 0x5f,
 0x60, 0x61, 0x62, 0x63, 0x64, 0x65, 0x66, 0x67,
 0x68, 0x69, 0x6a, 0x6b, 0x6c, 0x6d, 0x6e, 0x6f,
 0x70, 0x71, 0x72, 0x73, 0x74, 0x75, 0x76, 0x77,
 0x78, 0x79, 0x7a, 0x7b, 0x7c, 0x7d, 0x7e, 0x7f,
 0x80, 0x81, 0x82, 0x83, 0x84, 0x85, 0x86, 0x87,
 0x88, 0x89, 0x8a, 0x8b, 0x8c, 0x8d, 0x8e, 0x8f};

char p2[] = {0x65, 0x43, 0x21};

#define NUM_CODEWORDS 14    /* number of 65 byte EFM codewords to transmit */

/*
* Define a list of user frames to transmit
*  NOTE: This list defines the set of test cases to transmit.
*/

struct frame {
 int  startingByteNum;    /* byte position at which frame is available to send */
 int  length;             /* number of bytes in ethernet frame */
 char *theBytes;          /* pointer to ethernet frame bytes */
} FrameList[] = {      /* To test: */
 {200, 64, p0},   /* vanilla frame, scrambler, C(k), crc */
 {389, 64, p0},   /* all data sync byte, sync splitting S/data/crc */
 {465, 50, p1},   /* end frame & start new frame in same codeword, C(0) */
 {530,  3, p2},   /* align small frame to span sync byte */
 {650, 64, p0},   /* S following sync byte */
 {700, 55, p1},   /* back-to-back frames, sync byte within crc */
 {0,0,0}          /* end test */
};

/* constants as per TC spec */

#define CODEWORD_BYTE_COUNT     65
#define SYNC_ALL_DATA           0x0f     /* all data sync byte */
#define SYNC_NOT_ALL_DATA       0xf0     /* not all data sync byte */
#define START_OF_FRAME_BYTE     0x50     /* start data byte */
#define IDLE_BYTE               0x00     /* idle data byte */
#define EFM_CRC_POLY 0x82f63b78  /* X**28 + X**27 + X**26 + X**25 + X**23 +
 X**22 + X**20 + X**19 + X**18 + X**14 +
 X**13 + X**11 + X**10 + X**09 + X**08 +
 X**06 + X**00  (lsb is x**31) */

/* the EFM TC crc accumulator */
unsigned long CrcAccum;

void EfmCrcReset(void) {
 CrcAccum = 0xffffffff;
}

void EfmCrc(unsigned char TheByte) {
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 599 of 717

```
    int i;
    /* for all the bits in TheByte, lsb first */
    for( i=0; i<8; i++) {
        /* xor the lsb of TheByte with the x**31 of CrcAccum */
        int FeedBack = 0x01 & (CrcAccum ^ TheByte);
        TheByte  = TheByte  >> 1;
        CrcAccum = CrcAccum >> 1;
        if(FeedBack) {
            CrcAccum = CrcAccum ^ EFM_CRC_POLY;
        }
    }
}

/* run with an argument to get test tags in output, else just the numbers */
main(int argc, char * argv[])
{
    int   ByteNum;
    int   UserFrameIndex   = 0;
    int   HaveUserFrame    = 0;
    int   FrameBytesToGo   = 0;
    char *FrameBytePointer = 0;
    int   NeedCZero        = 0;
    int   b;
    char  Foo[50];

    for(ByteNum=0; ByteNum < (CODEWORD_BYTE_COUNT * NUM_CODEWORDS) ; ByteNum++) {
        unsigned char ByteToSend;
        int BytesLeftInCodeword = CODEWORD_BYTE_COUNT - (ByteNum % CODEWORD_BYTE_COUNT);
        char *FrameTag = 0;
        /* decide what I'm doing */
        switch(ByteNum % CODEWORD_BYTE_COUNT) {
            case 0: /* output start of a codeword */
                if(FrameBytesToGo >= (CODEWORD_BYTE_COUNT-1)) {
                    /* 64 or more bytes to go, send an all data codeword */
                    ByteToSend = SYNC_ALL_DATA;
                    FrameTag = "CODEWORD START (all data)";
                } else {
                    ByteToSend = SYNC_NOT_ALL_DATA;
                    FrameTag = "CODEWORD START (not all data)";
                    if( ByteNum == 0) FrameTag = "EFM bitstream reading right to left.";
                }
                break;
            case 1: /* if a C(k) byte is needed */
                if((FrameBytesToGo && (FrameBytesToGo < (CODEWORD_BYTE_COUNT-1))) ||
NeedCZero) {
                    int kVal = FrameBytesToGo;
                    /* output a C(k) */
                    ByteToSend = 0x10 + kVal;
                    /* calculate even parity */
                    for(b=0x40; b; b=b>>1) {
                    if(ByteToSend & b) {
                        ByteToSend ^= 0x80;
                    }
                }
                NeedCZero = 0;
                /* display C(k) with decimal k */
                sprintf(Foo,"    C(%d)",kVal);
                FrameTag = Foo;
                break;
            }
            /* else fall into default case */
            default:
                /* if I'm
                *   not sending a frame and
                *   there are more to send, and
                *   it's time to start (next frame is available), and
                *   the frame is not too short to start now (including S and crc bytes)
                */
                if(   (FrameBytesToGo == 0)
                && (FrameList[UserFrameIndex].length != 0)
                && (ByteNum >= FrameList[UserFrameIndex].startingByteNum)
                && ((FrameList[UserFrameIndex].length+5) >= BytesLeftInCodeword) )
                {
                    /* then start a new frame */
                    FrameTag = "  Start Frame";
                    ByteToSend = START_OF_FRAME_BYTE;
                    FrameBytesToGo = FrameList[UserFrameIndex].length + 4;
                    FrameBytePointer = FrameList[UserFrameIndex].theBytes;
                    UserFrameIndex++;
                    EfmCrcReset();
                } else if(FrameBytesToGo) {
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 600 of 717

```
                /* else if inside a frame then handle outputting
                 * a data byte (or the crc to go with it) */
                switch(FrameBytesToGo) {
                case 4: /* send first crc byte */
                    FrameTag = "    First Crc Byte";
                    ByteToSend = 0xff & ~CrcAccum;
                    break;
                case 3:
                    ByteToSend = 0xff & ~(CrcAccum >> 8);
                    break;
                case 2:
                    ByteToSend = 0xff & ~(CrcAccum >> 16);
                    break;
                case 1: /* send last crc byte */
                    FrameTag = "    Last Crc Byte";
                    ByteToSend = 0xff & ~(CrcAccum >> 24);
                    /* if crc ends just before sync byte,
                     * prepare to send C(0) byte */
                    if (ByteNum % CODEWORD_BYTE_COUNT == 64) {
                    NeedCZero = 1;
                    }
                    break;
                default: /* just send next data byte and update crc */
                    ByteToSend = (unsigned char)*FrameBytePointer++;
                    /* calculate CRC on data (61.2.3.3) */
                    EfmCrc(ByteToSend);
                    break;
                }
            FrameBytesToGo--;
        } else {
            /* else just output an idle byte */
            ByteToSend = IDLE_BYTE;
        }
    }
    /* output the byte (msb on left) (transmission order is right to left)*/
    printf("%05.5d: %02.2X ", ByteNum, ByteToSend);
    for(b=0x80; b; b = b >> 1) {
        if(ByteToSend & b) {
            printf("1");
        } else {
            printf("0");
        }
    }
    if((argc > 1) && FrameTag) {
        printf("    ;%s", FrameTag);
    }
    printf("\n");
  }
  return(0);
}
```

(61A–1)

The following data represents a valid data stream generated by the 64/65-octet encapsulation function (read left-to-right, then top-to-bottom).

```
F0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 F0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 F0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 F0 00 00 00 00 50 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15 16
17 18 19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33 34 35 36
37 38 39 3A F0 99 3B 3C 3D 3E 3F EB 36 6D FB 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 F0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 50 0F 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15 16 17 18
19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33 34 35 36 37 38
39 3A 3B 3C 3D 3E 3F F0 14 EB 36 6D FB 00 00 00 00 50 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D
4E 4F 50 51 52 53 54 55 56 57 58 59 5A 5B 5C 5D 5E 5F 60 61 62 63 64 65 66 67 68 69 6A 6B 6C 6D
6E 6F 70 71 55 A6 27 CE F0 90 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 50 65 43 21 93 8D FC 64 F0 90 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 F0 50 00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13
14 15 16 17 18 19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33
34 35 36 37 38 39 3A 3B 3C 3D 3E F0 95 3F EB 36 6D FB 50 40 41 42 43 44 45 46 47 48 49 4A 4B 4C
4D 4E 4F 50 51 52 53 54 55 56 57 58 59 5A 5B 5C 5D 5E 5F 60 61 62 63 64 65 66 67 68 69 6A 6B 6C
6D 6E 6F 70 71 72 73 74 75 76 16 7C F0 12 07 58 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 601 of 717

```
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 F0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
```


Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 602 of 717

Annex 61B

(normative)

Handshake codepoints for 2BASE-TL and 10PASS-TS

61B.1 Purpose and scope

This Annex contains the G.994.1 “standard information field” codepoints to be used by 2BASE-TL and 10PASS-TS in the procedures described in 61.4.

61B.2 Level-1 S field codepoints for 2BASE-TL and 10PASS-TS

The Npar(1) codepoints common to 2BASE-TL and 10PASS-TS are specified in Table 10 of G.994.1.

The SPar(1) codepoints to be used by 2BASE-TL and 10PASS-TS transceivers are specified in ITU-T Recommendation G.994.1. The EFM-specific codepoints are shown in Table 61B–1 for information only.

Table 61B–1—Standard information field — SPar(1) coding – Octet 4

Bits								
8	7	6	5	4	3	2	1	**SPar(1)s – Octet 4**
x	x	1	x	x	x	x	x	2BASE-TL
x	1	x	x	x	x	x	x	10PASS-TS
x	0	0	0	0	0	0	0	No parameters in this octet

61B.3 Codepoints for 2BASE-TL

61B.3.1 Level-2 S field codepoints for 2BASE-TL

Table 61B–2 through Table 61B–5 contain the level-2 codepoints specific to 2BASE-TL.

To support a wide range of data rates and multiple encodings, this section introduces a new way to encode data rates in G.994.1 code points. This method of encoding rates is used for both the PMMS rates and the training rates. Data rates are encoded as a set of ranges, where each range is expressed as a 3-tuple (minimum, maximum, step). The 3-tuple represents all rates of the form (m+ks)(64 kb/s) where m is the minimum value, s is the step value, and k is the set of all integers greater than or equal to zero such that m+ks is less than or equal to the maximum value. Thus, for example, the 3-tuple (40, 70, 10) represents the rates (40)(64 kb/s), (50)(64 kb/s), (60)(64 kb/s), and (70)(64 kb/s).

Each data rate parameter can be expressed as a set of between 1 to 8 ranges, where the supported rates are the union of those supported by the individual ranges. Thus, for example, the 3-tuples (20,30,4), (40,70,10) represent the rates (20)(64 kb/s), (24)(64 kb/s), (28)(64 kb/s), (40)(64 kb/s), (50)(64 kb/s), (60)(64 kb/s), and (70)(64 kb/s). If all bits of the extended base data rate minimum and maximum are set to zero, then those rates are not supported for line probe. If only one range of rates is required, then only the octets associated with (min1,max1,step1) shall be sent.

Also, in many cases, the values in the data range 3-tuple can be less than or equal to 89 (representing the maximum data rate of 5696 kb/s supported by 2BASE-TL). When using G.994.1 code point representation, only 6 bits are available for the value of an NPar(3). To support numbers greater than 63, the value must be split across multiple octets. When encoding a data range using G.994.1, 4 octets are used, where the first octet contains the highest order bit from each of the values in the 3-tuple.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 603 of 717

The following definition is added to the G.994.1 code point definitions in §6.4.1 of G.991.2 for the support of the extended data rates specified in this subclause.

Extended Base Data Rate These octets are used to specify payload rates, as follows:

— The PMMS octets indicate rates for line probing segments. Note that while PMMS uses 2-PAM modulation, the PMMS symbol rates are specified assuming 32 TC-PAM encoding, so the PMMS symbol rate (in kbaud) would be equal to the (payload data rate (kb/s) + 8 kb/s)/4. Valid values for minimum and maximum shall be between 4 and 89, inclusive, and valid values for step shall be between 1 and 89, inclusive. The variables j_5 and j_6 associated with the PMMS rates shall be independent, and shall range from 2 to 8, inclusive. If only one range of rates is required, then only the octets associated with (min1,max1,step1) shall be sent. If more than one range of rates is required, then j_5*4 and j_6*4 correspond to the number of octets sent.
— The training parameter octets indicate extended payload data rates supported.
— In CLR, upstream training parameters indicate which data mode rates the 2BASE-TL-R is capable of transmitting and downstream training parameters indicate which data mode rates the 2BASE-TL-R is capable of receiving. If the optional line probe is used, the receiver training parameters will be further limited by the probe results. Valid values for minimum and maximum shall be between 3 and 60, inclusive, for 16-TCPAM and between 12 and 89, inclusive, for 32-TCPAM. Valid values for step shall be between 1 and 89, inclusive. The variables j_1, j_2, j_3 and j_4 associated with the training rates shall be independent, and shall range from 2 to 8, inclusive. If only one range of rates is required, then only the octets associated with (min1,max1,step1) shall be sent. If more than one range of rates is required, then j_1*4, j_2*4, j_3*4 and j_4*4 correspond to the number of octets sent.
— In CL, downstream training parameters indicate which data mode rates the 2BASE-TL-O is capable of transmitting and upstream training parameters indicate which data mode rates the 2BASE-TL-O is capable of receiving. Valid values for minimum and maximum shall be between 3 and 60, inclusive, for 16-TCPAM and between 12 and 89, inclusive, for 32-TCPAM. Valid values for step shall be between 1 and 89, inclusive. The variables j_1, j_2, j_3 and j_4 associated with the training rates shall be independent, and shall range from 2 to 8, inclusive. If only one range of rates is required, then only the octets associated with (min1,max1,step1) shall be sent. If more than one range of rates is required, then j_1*4, j_2*4, j_3*4 and j_4*4 correspond to the number of octets sent. If optional line probe is used, the receiver training parameters will be further limited by the probe results.
— Data rate selections shall be specified in MP and MS messages by setting the maximum and minimum rates to the same value.

Table 61B–2—Standard information field – 2BASE-TL - NPar(2) coding – Octet 1

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL NPar(2)s - Octet 1**
x	x	x	x	x	x	x	1	2BASE-TL Training mode[a]
x	x	x	x	x	x	1	x	2BASE-TL PMMS mode[a]
x	x	x	x	x	1	x	x	2BASE-TL G.991.2 Annex A Operation
x	x	x	x	1	x	x	x	2BASE-TL G.991.2 Annex B Operation
x	x	x	1	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	0	0	0	0	0	0	No parameters in this octet

[a]Only one of these bits shall be set at any given time.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 604 of 717

Table 61B–3—Standard information field – 2BASE-TL - NPar(2) coding – Octet 2

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL NPar(2)s - Octet 2**
x	x	x	x	x	x	x	1	Regenerator silent period[a,b]
x	x	x	x	x	x	1	x	SRU[b]
x	x	x	x	x	1	x	x	Diagnostic Mode[b]
x	x	x	x	1	x	x	x	Reserved for allocation by IEEE 802.3
x	x	x	1	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	0	0	0	0	0	0	No parameters in this octet

[a]This bit shall be set to 0_b if the 2BASE-TL PMMS mode NPar(2) bit is set to 1_b or the 2BASE-TL Training mode NPar(2) bit is set to 1_b.
[b]The specification and use of regenerators is outside the scope of this standard.

Table 61B–4—Standard information field – 2BASE-TL - SPar(2) coding – Octet 1

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL SPar(2)s – Octet 1**
x	x	x	x	x	x	x	1	2BASE-TL Downstream training parameters
x	x	x	x	x	x	1	x	2BASE-TL Downstream training rates - 16-TCPAM
x	x	x	x	x	1	x	x	2BASE-TL Downstream training rates - 32-TCPAM
x	x	x	x	1	x	x	x	2BASE-TL Upstream training parameters
x	x	x	1	x	x	x	x	2BASE-TL Upstream training rates - 16-TCPAM
x	x	1	x	x	x	x	x	2BASE-TL Upstream training rates - 32-TCPAM
x	x	0	0	0	0	0	0	No parameters in this octet

61B.3.2 Level-3 S field codepoints for 2BASE-TL

61B.3.2.1 Training parameter codepoints

Tables 61B–6 through 61B–39 contain the level-3 codepoints specific to 2BASE-TL training parameters.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 605 of 717

Table 61B–5—Standard information field – 2BASE-TL SPar(2) coding – Octet 2

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL SPar(2)s – Octet 2**
x	x	x	x	x	x	x	1	2BASE-TL Downstream PMMS parameters
x	x	x	x	x	x	1	x	2BASE-TL Downstream PMMS rates
x	x	x	x	x	1	x	x	2BASE-TL Upstream PMMS parameters
x	x	x	x	1	x	x	x	2BASE-TL Upstream PMMS rates
x	x	x	1	x	x	x	x	2BASE-TL Downstream framing parameters
x	x	1	x	x	x	x	x	2BASE-TL Upstream framing parameters
x	x	0	0	0	0	0	0	No parameters in this octet

Table 61B–6—Standard information field – 2BASE-TL - Downstream training parameters - NPar(3) coding – Octet 1

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL downstream training NPar(3)s – Octet 1**
x	x	0	x	x	x	x	x	Downstream PBO (dB) (bits 5-1 x 1.0 dB)
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3

Table 61B–7—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM- NPar(3) coding – Octet 1

Bits								
8	7	6	5	4	3	2	1	**2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet 1**
x	x						x	Downstream base data rate -16-TCPAM Minimum 1 (bit 7)
x	x					x		Downstream base data rate -16-TCPAM Maximum 1 (bit 7)
x	x				x			Downstream base data rate -16-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 606 of 717

Table 61B–8—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM- NPar(3) coding – Octet 2

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -16-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–9—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM - NPar(3) coding – Octet 3

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -16-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–10—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM - NPar(3) coding – Octet 4

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s Octet 4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -16-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–11—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM- NPar(3) coding – Octet j_1*4-3

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet j_1*4-3
8	7	6	5	4	3	2	1	
x	x						x	Extended Downstream base data rate -16-TCPAM Minimum j_1 (bit 7)
x	x					x		Extended Downstream base data rate -16-TCPAM Maximum j_1 (bit 7)
x	x				x			Extended Downstream base data rate -16-TCPAM Step j_1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 607 of 717

Table 61B–12—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM- NPar(3) coding – Octet j_1*4-2

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet j_1*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate -16-TCPAM Minimum j_1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–13—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM - NPar(3) coding – Octet j_1*4-1

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s – Octet j_1*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate -16-TCPAM Maximum j_1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–14—Standard information field – 2BASE-TL - Downstream training rate - 16-TCPAM - NPar(3) coding – Octet j_1*4

Bits								2BASE-TL downstream training rate - 16-TCPAM NPar(3)s Octet j_1*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate -16-TCPAM Step j_1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–15—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM- NPar(3) coding – Octet 1

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x						x	Downstream base data rate -32-TCPAM Minimum 1 (bit 7)
x	x					x		Downstream base data rate -32-TCPAM Maximum 1 (bit 7)
x	x				x			Downstream base data rate -32-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 608 of 717

Table 61B–16—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM- NPar(3) coding – Octet 2

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -32-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–17—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM - NPar(3) coding – Octet 3

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -32-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–18—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM - NPar(3) coding – Octet 4

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s Octet 4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate -32-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–19—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM- NPar(3) coding – Octet j_2*4-3

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet j_2*4-3
8	7	6	5	4	3	2	1	
x	x						x	Extended Downstream base data rate - 32-TCPAM Minimum j_2 (bit 7)
x	x					x		Extended Downstream base data rate - 32-TCPAM Maximum j_2 (bit 7)
x	x				x			Extended Downstream base data rate - 32-TCPAM Step j_2 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 609 of 717

Table 61B–20—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM- NPar(3) coding – Octet j_2*4-2

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet j_2*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate - 32-TCPAM Minimum j_2 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–21—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM - NPar(3) coding – Octet j_2*4-1

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s – Octet j_2*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate - 32-TCPAM Maximum j_2 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–22—Standard information field – 2BASE-TL - Downstream training rate - 32-TCPAM - NPar(3) coding – Octet j_2*4

Bits								2BASE-TL downstream training rate - 32-TCPAM NPar(3)s Octet j_2*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Downstream base data rate - 32-TCPAM Step j_2 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–23—Standard information field – 2BASE-TL - Upstream training parameters - NPar(3) coding – Octet 1

Bits								2BASE-TL upstream training NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x	0	x	x	x	x	x	Upstream PBO (dB) (bits 5-1 x 1.0 dB)
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 610 of 717

Table 61B–24—Standard information field – 2BASE-TL - upstream training rate - 16-TCPAM-NPar(3) coding – Octet 1

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x						x	Upstream base data rate -16-TCPAM Minimum 1 (bit 7)
x	x					x		Upstream base data rate -16-TCPAM Maximum 1 (bit 7)
x	x				x			Upstream base data rate -16-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–25—Standard information field – 2BASE-TL - upstream training rate - 16-TCPAM-NPar(3) coding – Octet 2

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -16-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–26—Standard information field – 2BASE-TL - upstream training rate - 16-TCPAM - NPar(3) coding – Octet 3

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -16-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–27—Standard information field – 2BASE-TL - Upstream training rate - 16-TCPAM - NPar(3) coding – Octet 4

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s Octet 4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -16-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 611 of 717

Table 61B–28—Standard information field – 2BASE-TL - Upstream training rate - 16-TCPAM-NPar(3) coding – Octet j_3*4-3

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet j_3*4-3
8	7	6	5	4	3	2	1	
x	x						x	Extended Upstream base data rate - 16-TCPAM Minimum j_3 (bit 7)
x	x					x		Extended Upstream base data rate -16-TCPAM Maximum j_3 (bit 7)
x	x				x			Extended Upstream base data rate -16-TCPAM Step j_3 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–29—Standard information field – 2BASE-TL - Upstream training rate - 16-TCPAM-NPar(3) coding – Octet j_3*4-2

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet j_3*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate -16-TCPAM Minimum j_3 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–30—Standard information field – 2BASE-TL - Upstream training rate - 16-TCPAM - NPar(3) coding – Octet j_3*4-1

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s – Octet j_3*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate -16-TCPAM Maximum j_3 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–31—Standard information field – 2BASE-TL - Upstream training rate - 16-TCPAM - NPar(3) coding – Octet j_3*4

Bits								2BASE-TL upstream training rate - 16-TCPAM NPar(3)s Octet j_3*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate -16-TCPAM Step j_3 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 612 of 717

Table 61B–32—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM-NPar(3) coding – Octet 1

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x						x	Upstream base data rate -32-TCPAM Minimum 1 (bit 7)
x	x					x		Upstream base data rate -32-TCPAM Maximum 1 (bit 7)
x	x				x			Upstream base data rate -32-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–33—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM-NPar(3) coding – Octet 2

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -32-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–34—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM - NPar(3) coding – Octet 3

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -32-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–35—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM - NPar(3) coding – Octet 4

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s Octet 4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate -32-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 613 of 717

Table 61B–36—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM-NPar(3) coding – Octet j_4*4-3

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet j_4*4-3
8	7	6	5	4	3	2	1	
x	x						x	Extended Upstream base data rate - 32-TCPAM Minimum j_4 (bit 7)
x	x					x		Extended Upstream base data rate - 32-TCPAM Maximum j_4 (bit 7)
x	x				x			Extended Upstream base data rate - 32-TCPAM Step j_4 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–37—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM-NPar(3) coding – Octet j_4*4-2

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet j_4*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate - 32-TCPAM Minimum j_4 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–38—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM - NPar(3) coding – Octet j_4*4-1

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s – Octet j_4*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate -32-TCPAM Maximum j_4 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–39—Standard information field – 2BASE-TL - Upstream training rate - 32-TCPAM - NPar(3) coding – Octet j_4*4

Bits								2BASE-TL upstream training rate - 32-TCPAM NPar(3)s Octet j_4*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Extended Upstream base data rate -32-TCPAM Step j_4 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 614 of 717

61B.3.2.2 PMMS parameter codepoints

Tables 61B–40 through 61B–67 contain the level-3 codepoints specific to 2BASE-TL PMMS parameters.

Table 61B–40—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 1

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x	0	x	x	x	x	x	Downstream PBO (dB) (bits 5-1 x 1.0 dB)
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3

Table 61B–41—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 2

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	0	0	0	0	0	0	Downstream PMMS duration unspecified by terminal
x	x	x	x	x	x	x	x	Downstream PMMS duration (bits 6-1 x 50 ms)
x	x	1	1	1	1	1	1	Reserved for allocation by IEEE 802.3

Table 61B–42—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 3

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	0	0	0	x	x	x	Downstream PMMS scrambler polynomial Index (i2, i1, i0)

Table 61B–43—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 4

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 4
8	7	6	5	4	3	2	1	
x	x	1	x	x	x	x	x	Worst-case PMMS target margin (dB) (bits 5-1 x 1.0 dB - 10 dB)
x	x	0	0	0	0	0	0	Worst-case PMMS target margin unspecified by terminal (values of bits 6-1 from 1 to 31 reserved for allocation by IEEE 802.3)

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 615 of 717

Table 61B–44—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 5

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 5
8	7	6	5	4	3	2	1	
x	x	1	x	x	x	x	x	Current-condition PMMS target margin (dB) (bits 5-1 x 1.0 dB - 10 dB)
x	x	0	0	0	0	0	0	Current-condition PMMS target margin unspecified by terminal (values of bits 6-1 from 1 to 31 reserved for allocation by IEEE 802.3)

Table 61B–45—Standard information field – 2BASE-TL - Downstream PMMS parameters - NPar(3) coding – Octet 6

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 6
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	1	Reserved for allocation by IEEE 802.3
x	x	x	x	x	x	1	x	Transmit Silence
x	x	x	x	x	1	x	x	Reserved for allocation by IEEE 802.3
x	x	x	x	1	x	x	x	Reserved for allocation by IEEE 802.3
x	x	x	1	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	0	0	0	0	0	0	No parameters in this octet

Table 61B–46—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet 1

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x						x	Downstream base data rate- 32-TCPAM Minimum 1 (bit 7)
						x		Downstream base data rate- 32-TCPAM Maximum 1 (bit 7)
x	x				x			Downstream base data rate- 32-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.

Table 61B–47—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet 2

Bits								2BASE-TL downstream PMMS rates NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–48—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet 3

Bits								2BASE-TL downstream PMMS rates NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–49—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet 4

Bits								2BASE-TL downstream PMMS NPar(3)s Octet 6
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–50—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet j_5*4-3

Bits								2BASE-TL downstream PMMS NPar(3)s – Octet j_5*4-3
8	7	6	5	4	3	2	1	
x	x						x	Downstream base data rate- 32-TCPAM Minimum j_5 (bit 7)
x	x					x		Downstream base data rate- 32-TCPAM Maximum j_5 (bit 7)
x	x				x			Downstream base data rate- 32-TCPAM Step j_5 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 617 of 717

Table 61B–51—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet j_5*4-2

Bits								2BASE-TL downstream PMMS rates NPar(3)s – Octet j_5*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Minimum j_5 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–52—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet j_5*4-1

Bits								2BASE-TL downstream PMMS rates NPar(3)s – Octet j_5*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Maximum j_5 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–53—Standard information field – 2BASE-TL - Downstream PMMS rates - NPar(3) coding – Octet j_5*4

Bits								2BASE-TL downstream PMMS NPar(3)s Octet j_5*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Downstream base data rate- 32-TCPAM Step j_5 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–54—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 1

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x	0	x	x	x	x	x	Upstream PBO (dB) (bits 5-1 x 1.0 dB)
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3

Table 61B–55—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 2

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	0	0	0	0	0	0	Upstream PMMS duration unspecified by terminal
x	x	x	x	x	x	x	x	Upstream PMMS duration (bits 6-1 x 50 ms)
x	x	1	1	1	1	1	1	Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 618 of 717

Table 61B–56—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 3

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	0	0	0	x	x	x	Upstream PMMS scrambler polynomial Index (i2, i1, i0)

Table 61B–57—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 4

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 4
8	7	6	5	4	3	2	1	
x	x	1	x	x	x	x	x	Worst-case PMMS target margin (dB) (bits 5-1 x 1.0 dB - 10 dB)
x	x	0	0	0	0	0	0	Worst-case PMMS target margin unspecified by terminal (values of bits 6-1 from 1 to 31 reserved for allocation by IEEE 802.3)

Table 61B–58—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 5

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 5
8	7	6	5	4	3	2	1	
x	x	1	x	x	x	x	x	Current-condition PMMS target margin (dB) (bits 5-1 x 1.0 dB – 10 dB)
x	x	0	0	0	0	0	0	Current-condition PMMS target margin unspecified by terminal (values of bits 6-1 from 1 to 31 reserved for allocation by IEEE 802.3)

Table 61B–59—Standard information field – 2BASE-TL - Upstream PMMS parameters - NPar(3) coding – Octet 6

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 6
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	1	Reserved for allocation by IEEE 802.3
x	x	x	x	x	x	1	x	Transmit Silence
x	x	x	x	x	1	x	x	Reserved for allocation by IEEE 802.3
x	x	x	x	1	x	x	x	Reserved for allocation by IEEE 802.3
x	x	x	1	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	1	x	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	0	0	0	0	0	0	No parameters in this octet

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 619 of 717

Table 61B–60—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet 1

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x						x	Upstream base data rate- 32-TCPAM Minimum 1 (bit 7)
x	x					x		Upstream base data rate- 32-TCPAM Maximum 1 (bit 7)
x	x				x			Upstream base data rate- 32-TCPAM Step 1 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–61—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet 2

Bits								2BASE-TL upstream PMMS rates NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Minimum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–62—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet 3

Bits								2BASE-TL upstream PMMS rates NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Maximum 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–63—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet 4

Bits								2BASE-TL upstream PMMS NPar(3)s Octet 6
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Step 1 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 620 of 717

Table 61B–64—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet j_6*4-3

Bits								2BASE-TL upstream PMMS NPar(3)s – Octet j_6*4-3
8	7	6	5	4	3	2	1	
x	x						x	Upstream base data rate- 32-TCPAM Minimum j_6 (bit 7)
x	x					x		Upstream base data rate- 32-TCPAM Maximum j_6 (bit 7)
x	x				x			Upstream base data rate- 32-TCPAM Step j_6 (bit 7)
x	x	x	x	x				Reserved for allocation by IEEE 802.3

Table 61B–65—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet j_6*4-2

Bits								2BASE-TL upstream PMMS rates NPar(3)s – Octet j_6*4-2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Minimum j_6 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–66—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet j_6*4-1

Bits								2BASE-TL upstream PMMS rates NPar(3)s – Octet j_6*4-1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Maximum j_6 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Table 61B–67—Standard information field – 2BASE-TL - Upstream PMMS rates - NPar(3) coding – Octet j_6*4

Bits								2BASE-TL upstream PMMS NPar(3)s Octet j_6*4
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Upstream base data rate- 32-TCPAM Step j_6 (bit 1-6)[a]

[a]Note that the rates are determined by combining (bit 7) and the 6-bits in this octet to create a 7-bit number.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 621 of 717

61B.3.2.3 Framing parameter codepoints

Tables 61B–68 through 61B–73 contain the level-3 codepoints specific to 2BASE-TL framing parameters.

Table 61B–68—Standard information field – 2BASE-TL - Downstream framing parameters - NPar(3) coding – Octet 1

Bits								2BASE-TL Downstream framing NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x					x	x	Sync Word (bits 14 and 13)
x	x			x	x			Stuff Bits (bits 1 to 2)
		x	x					Reserved for allocation by IEEE 802.3

Table 61B–69—Standard information field – 2BASE-TL - Downstream framing parameters - NPar(3) coding – Octet 2

Bits								2BASE-TL Downstream framing NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Sync Word (bits 12 to 7)

Table 61B–70—Standard information field – 2BASE-TL - Downstream framing parameters - NPar(3) coding – Octet 3

Bits								2BASE-TL Downstream framing NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Sync Word (bits 6 to 1)

Table 61B–71—Standard information field – 2BASE-TL - Upstream framing parameters - NPar(3) coding – Octet 1

Bits								2BASE-TL Upstream framing NPar(3)s – Octet 1
8	7	6	5	4	3	2	1	
x	x					x	x	Sync Word (bits 14 and 13)
x	x			x	x			Stuff Bits (bits 1 to 2)
		x	x					Reserved for allocation by IEEE 802.3

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 622 of 717

Table 61B–72—Standard information field – 2BASE-TL - Upstream framing parameters - NPar(3) coding – Octet 2

Bits								2BASE-TL Upstream framing NPar(3)s – Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Sync Word (bits 12 to 7)

Table 61B–73—Standard information field – 2BASE-TL - Upstream framing parameters - NPar(3) coding – Octet 3

Bits								2BASE-TL Upstream framing NPar(3)s – Octet 3
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Sync Word (bits 6 to 1)

61B.4 Codepoints for 10PASS-TS

61B.4.1 Level-2 S field codepoints for 10PASS-TS

Table 61B–74 and Table 61B–75 contain the level-2 codepoints specific to 10PASS-TS.

Table 61B–74—Standard information field – 10PASS-TS NPar(2) coding – Octet 1

Bits								10PASS-TS NPar(2)s
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	1	Upstream use of 25-138 KHz band
x	x	x	x	x	x	1	x	Downstream use of 25-138 KHz band
x	x	x	x	x	1	x	x	Reserved for allocation by IEEE 802.3
x	x	x	x	1	x	x	x	Reserved for allocation by IEEE 802.3
x	x	x	1	x	x	x	x	Reserved for allocation by IEEE 802.3
x	x	1	x	x	x	x	x	G.997.1 - Clear EOC OAM
x	x	0	0	0	0	0	0	No parameters in this octet

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 623 of 717

Table 61B–75—Standard information field – 10PASS-TS SPar(2) coding – Octet 1

Bits								10PASS-TS SPar(2)s
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	1	Reserved for allocation by IEEE 802.3
x	x	x	x	x	x	1	x	Used bands in upstream[a]
x	x	x	x	x	1	x	x	Used bands in downstream[a]
x	x	x	x	1	x	x	x	IDFT/DFT size
x	x	x	1	x	x	x	x	Initial length of CE
x	x	1	x	x	x	x	x	MCM RFI bands[a]
x	x	0	0	0	0	0	0	No parameters in this octet

[a]The length of the corresponding NPar(3) field is variable and is a multiple of 4 octets. The length depends on the total number of bands to be specified.

61B.4.2 Level-3 S field codepoints for 10PASS-TS

61B.4.2.1 Used bands in upstream codepoints

Tables 61B–76 through 61B–79 contain the level-3 codepoints specific to 10PASS-TS Used bands in upstream.

Table 61B–76—Standard information field – Used bands in upstream NPar(3) coding – Octet 4n-3 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in upstream NPar(3)s Octet 4n-3 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Table 61B–77—Standard information field – Used bands in upstream NPar(3) coding – Octet 4n-2 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in upstream NPar(3)s Octet 4n-2 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 624 of 717

Table 61B–78—Standard information field – Used bands in upstream NPar(3) coding – Octet 4n-1 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in upstream NPar(3)s Octet 4n-1 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Table 61B–79—Standard information field – Used bands in upstream NPar(3) coding – Octet 4n (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in upstream NPar(3)s Octet 4n (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

61B.4.2.2 Used bands in downstream codepoints

Table 61B–80 through Table 61B–83 contain the level-3 codepoints specific to 10PASS-TS Used bands in downstream.

Table 61B–80—Standard information field – Used bands in downstream NPar(3) coding – Octet 4n-3 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in downstream NPar(3)s Octet 4n-3 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Table 61B–81—Standard information field – Used bands in downstream NPar(3) coding – Octet 4n-2 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in downstream NPar(3)s Octet 4n-2 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 625 of 717

Table 61B–82—Standard information field – Used bands in downstream NPar(3) coding – Octet 4n-1 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in downstream NPar(3)s Octet 4n-1 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Table 61B–83—Standard information field – Used bands in downstream NPar(3) coding – Octet 4n (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS Used bands in downstream NPar(3)s Octet 4n (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

61B.4.2.3 IDFT/DFT size codepoints

Table 61B–84 contains the level-3 codepoints specific to 10PASS-TS IDFT/DFT size.

Table 61B–84—Standard information field – IDFT/DFT size NPar(3) coding – Octet 1

Bits								10PASS-TS IDFT/DFT size NPar(3)s Octet 1
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	IDFT/DFT size (bits 6-1 x 256 points)

61B.4.2.4 Initial length of CE codepoints

Table 61B–85 through Table 61B–86 contain the level-3 codepoints specific to 10PASS-TS Initial length of CE.

Table 61B–85—Standard information field – Initial length of CE NPar(3) coding – Octet 1

Bits								10PASS-TS Initial length of CE NPar(3)s Octet 1
8	7	6	5	4	3	2	1	
x	x	0	0	x	x	x	x	Initial sample length of cyclic extension (bits 7 to 10)

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 626 of 717

Table 61B–86—Standard information field – Initial length of CE NPar(3) coding – Octet 2

Bits								10PASS-TS Initial length of CE NPar(3)s Octet 2
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Initial sample length of cyclic extension (bits 6-1)

61B.4.2.5 MCM RFI band codepoints

Table 61B–87 through Table 61B–90 contain the level-3 codepoints specific to 10PASS-TS MCM RFI bands.

Table 61B–87—Standard information field – MCM RFI bands NPar(3) coding – Octet 4n-3 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS MCM RFI bands NPar(3)s Octet 4n-3 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Table 61B–88—Standard information field – MCM RFI bands NPar(3) coding – Octet 4n-2 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS MCM RFI bands NPar(3)s Octet 4n-2 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	End tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

Table 61B–89—Standard information field – MCM RFI bands NPar(3) coding – Octet 4n-1 (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS MCM RFI bands NPar(3)s Octet 4n-1 (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 7 to 12)[a]

[a]n is the band index, starting from 1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 627 of 717

Table 61B–90—Standard information field – MCM RFI bands NPar(3) coding – Octet 4n (n = 1, 2, 3, 4, 5)

Bits								10PASS-TS MCM RFI bands NPar(3)s Octet 4n (n = 1, 2, 3, 4, 5)
8	7	6	5	4	3	2	1	
x	x	x	x	x	x	x	x	Start tone index of band n (bits 1 to 6)[a]

[a]n is the band index, starting from 1.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 628 of 717

61B.5 Protocol Implementation Conformance Statement (PICS) proforma for Annex 61B, Handshake codepoints for 2BASE-TL and 10PASS-TS[24]

61B.5.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Annex 61B, Handshake codepoints for 2BASE-TL and 10PASS-TS, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

61B.5.2 Identification

61B.5.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

61B.5.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Handshake codepoints for 2BASE-TL and 10PASS-TS.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

61B.5.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
HSCP	Handshake Codepoints	61B	The coding rules for 2BASE-TL handshake messages are implemented.	M	Yes [ ]

[24]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this clause so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 629 of 717

61B.5.4 2BASE-TL handshake coding rules

Item	Feature	Subclause	Value/Comment	Status	Support
HSCP-1	PMMS coding	61B.3.1	Values for min and max are between 4 and 89, inclusive.	M	Yes [ ]
HSCP-2	PMMS coding	61B.3.1	Valid values for step are between 1 and 89, inclusive.	M	Yes [ ]
HSCP-3	PMMS coding	61B.3.1	The variables j_5 and j_6 associated with the PMMS rates are independent, and range from 2 to 8, inclusive.	M	Yes [ ]
HSCP-4	PMMS coding	61B.3.1	If only one range of rates is required, then only the octets associated with (min1,max1,step1) are sent.	M	Yes [ ]
HSCP-5	CLR coding	61B.3.1	Valid values for minimum and maximum are between 3 and 60, inclusive, for 16-TCPAM and between 12 and 89, inclusive, for 32-TCPAM.	M	Yes [ ]
HSCP-6	CLR coding	61B.3.1	Valid values for step are between 1 and 89, inclusive.	M	Yes [ ]
HSCP-7	CLR coding	61B.3.1	The variables j_1, j_2, j_3 and j_4 associated with the training rates are independent, and range from 2 to 8, inclusive.	M	Yes [ ]
HSCP-8	CLR coding	61B.3.1	If only one range of rates is required, then only the octets associated with (min1,max1,step1) is sent. If more than one range of rates is required, then j_1*4, j_2*4, j_3*4 and j_4*4 correspond to the number of octets sent.	M	Yes [ ]
HSCP-9	CL coding	61B.3.1	Valid values for minimum and maximum are between 3 and 60, inclusive, for 16-TCPAM and between 12 and 89, inclusive, for 32-TCPAM.	M	Yes [ ]
HSCP-10	CL coding	61B.3.1	Valid values for step are between 1 and 89, inclusive.	M	Yes [ ]
HSCP-11	CL coding	61B.3.1	The variables j_1, j_2, j_3 and j_4 associated with the training rates are independent, and range from 2 to 8, inclusive.	M	Yes [ ]
HSCP-12	CL coding	61B.3.1	If only one range of rates is required, then only the octets associated with (min1,max1,step1) is sent. If more than one range of rates is required, then j_1*4, j_2*4, j_3*4 and j_4*4 correspond to the number of octets sent.	M	Yes [ ]
HSCP-13	SPar(2) coding	61B.3.1	Only one of the bits 2BASE-TL training mode and 2BASE-TL PMMS mode is set at any given time.	M	Yes [ ]
HSCP-14	SPar(2) coding	61B.3.1	The Regenerator silent period bit is set to 0_b if the 2BASE-TL PMMS mode NPar(2) bit is set to 1_b or the 2BASE-TL Training mode NPar(2) bit is set to 1_b.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 630 of 717

Annex 62A

(normative)

PMD profiles for 10PASS-TS

62A.1 Introduction and rationale

Annex 62A defines the PMD profiles for 10PASS-TS. These profiles define the transmission characteristics of the PHY on the media. 10PASS-TS PHYs are required to operate across varying media quality, regulatory and noise environments.

The profiles defined in this clause have two purposes. The first is to describe a bounded set of operating modes that a party might choose from when implementing, integrating and installing 10PASS-TS equipment. 10PASS-TS PHYs are inherently flexible in their transmission capabilities. The possible combination of transmission parameters are nearly infinite. The defined profiles collect a small subset of these parameters into modes that work well in most deployments. For deployments that require an operating mode not defined in this Annex, profiles can be overridden by setting PHY PMD registers directly, via Clause 45 for example. Informative Annex 62C contains examples of such user-defined modes of operation.

The second purpose of profiles is to define a set of operating modes against which PHY performance compliance may be tested. The topic of performance compliance is addressed for 10PASS-TS in Annex 62B.

62A.2 Relationship to other clauses

Clause 30 describes how the selection of Annex 62A profiles is exported to a management entity.

Clause 45 registers describe an optional mechanism for configuring a 10PASS-TS PHY to use a particular profile. The register settings for each profile are contained in 62A.4.

62A.3 Profile definitions

The following sections define the mandatory profiles for 10PASS-TS operation, in terms of bandplan, PSD mask, UPBO Reference PSD, notching parameters and payload rate.

62A.3.1 Bandplan and PSD mask profiles

The spectral characteristics of 10PASS-TS communication on the copper medium are defined by a choice of bandplans and PSD Masks.

Each of 5 standard frequency bands (Band 0, D1, U1, D2, U2) used for 10PASS-TS communication are defined in a bandplan. 10PASS-TS PHYs operating in the same cable bundle should use the same bandplan to ensure spectral compatibility. Furthermore, the selection of bandplan may be governed by regional regulations that pertain to the deployment. While all 10PASS-TS PHYs may operate in any of the below bandplans, installers should be aware of any regulations that might restrict their choice of modes. Bandplan profiles specify the use of 2, 3, 4, or 5 standard frequency bands.

PSD Masks further define the spectral environment by specifying the maximum transmit power spectral density at a given frequency. Like bandplans, the PSD mask should be selected to be compatible with applicable regulations and to match other PHYs operating in the same cable bundle.

Profiles are defined here for various regulatory environments as well as for private installation. Additionally, operation with a bandplan or PSD mask not defined in this clause is supported by configuration through Clause 45 registers. All 10PASS-TS PHYs shall be capable of operating in all profiles listed in this clause. Profile definitions are listed in Table 62A-1.

.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 631 of 717

Table 62A-1—Bandplan and PSD Mask Profiles

Profile Number	PSD Mask	Band Assignment[a]	Bandplan
1	T1.424 FTTCab.M1	x/D/U/D/U	G.993.1 Bandplan A
2	T1.424 FTTEx.M1		
3	T1.424 FTTCab.M2		
4	T1.424 FTTEx.M2		
5	T1.424 FTTCab.M1	D/D/U/D/U	
6	T1.424 FTTEx.M1		
7	T1.424 FTTCab.M2		
8	T1.424 FTTEx.M2		
9	T1.424 FTTCab.M1	U/D/U/D/x	
10	T1.424 FTTEx.M1		
11	T1.424 FTTCab.M2		
12	T1.424 FTTEx.M2		
13	TS1 101 270-1 Pcab.M1.A	x/D/U/D/U	G.993.1 Bandplan B
14	TS1 101 270-1 Pcab.M1.B		
15	TS1 101 270-1 Pex.P1.M1		
16	TS1 101 270-1 Pex.P2.M1		
17	TS1 101 270-1 Pcab.M2		
18	TS1 101 270-1 Pex.P1.M2		
19	TS1 101 270-1 Pex.P2.M2		
20	TS1 101 270-1 Pcab.M1.A	U/D/U/D/x	
21	TS1 101 270-1 Pcab.M1.B		
22	TS1 101 270-1 Pex.P1.M1		
23	TS1 101 270-1 Pex.P2.M1		
24	TS1 101 270-1 Pcab.M2		
25	TS1 101 270-1 Pex.P1.M2		
26	TS1 101 270-1 Pex.P2.M2		
27	G.993.1 F.1.2.1 (VDSL over POTS)	x/D/U/D/U	G.993.1 Annex F
28	G.993.1 F.1.2.2 (VDSL over TCM-ISDN)		
29	G.993.1 F.1.2.3 (PSD reduction)		
30	T1.424 FTTCab.M1 (extended)	x/D/U/D/U/D	G.993.1 Annex A[b]

[a]For each band in the bandplan, the Band Assignment indicates the use or direction of communication for that band. U=upstream, D=downstream, x=band is unused. Bands are listed in this order: 0/1/2/3/4.

[b]This profile uses a 5th band (12 MHz—16.5 MHz) for downstream transmission at –60 dBm/Hz.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 632 of 717

62A.3.2 Bandplan definitions

The management entity should load the appropriate Clause 45 registers according to the bandplan specified by the selected profile. 62A.4 contains examples of the use of Clause 45 registers for the purpose of setting profiles.

The VDSL bandplans defined in ITU-T Recommendation G.993.1 shall be supported by all 10PASS-TS PMDs. These bandplans are represented for information in Table 62A-2.

Table 62A-2—Bandplans defined by ITU-T Recommendation G.993.1

Plan	Band 0 (optional) US/DS	Band D1	Band U1	Band D2	Band U2
Bandplan A (formerly Plan 998)	25 kHz – 138 kHz	138 kHz – 3.75 MHz	3.75 Mhz – 5.2 MHz	5.2 MHz – 8.5 MHz	8.5 MHz – 12 MHz
Bandplan B (formerly Plan 997)	25 kHz – 138 kHz	138 kHz – 3.0 MHz	3.0 MHz – 5.1 MHz	5.2 MHz – 7.05 MHz	7.05 MHz – 12 MHz
Bandplan C[a]	25 kHz – 138 kHz	138 kHz – 2.5MHz	2.5 MHz – 3.75 MHz	3.75 MHz – *Fx*	*Fx* – 12MHz
Annex F[b,c]	25 kHz – 138 kHz	138 kHz – 3.75 MHz	3.75 Mhz – 5.2 MHz	5.2 MHz – 8.5 MHz	8.5 MHz – 12 MHz

[a]Bandplan C is characterized by a variable split frequency between band D2 and band U2, represented as "*Fx*". 10PASS-TS shall support operation in Bandplan C for $Fx = 3750\text{kHz} + n \times 250\text{kHz}$, where $0 \le n \le 33$.

[b]Subsets composed of at least one downstream band and one upstream band among D1, U1, D2 and U2 may be implemented.

[c]Band 1D starts at 640kHz when operating in the frequency region above TCM-ISDN DSL band. Band 1D starts at 1.104MHz when operating with PSD reduction function in the frequency region below 1.104Mhz.

62A.3.3 PSD mask definitions

The management entity should load the appropriate Clause 45 registers according to the PSD Mask specified by the selected profile. 62A.4 contains examples of the use of Clause 45 registers for the purpose of setting profiles.

The VDSL PSD Masks defined in ITU-T Recommendation G.993.1, T1.424 and ETSI TS 101 270-1 shall be supported by all 10PASS-TS PMDs.

NOTE—The reference documents in which the PSD Masks are specified also specify the relationship between PSD Mask and PSD template, and the appropriate method to assess compliance with a PSD Mask or a PSD template.

62A.3.4 UPBO Reference PSD Profiles

Upstream Power Back-Off (UPBO) is defined in 62.3.4.1. Its operation requires the specification of a Reference PSD, by means of which the 10PASS-TS-R calculates the maximum upstream transmit PSD. Different UPBO Reference PSDs have been standardized in T1.424 and ETSI TS 101 270-1, as shown in Table 62A-3. 10PASS-TS implementations shall support all UPBO Reference PSDs listed in Table 62A-3. The 10PASS-TS PHY shall additionally allow a profile value of "0" to be selected, which indicates that UPBO is to be disabled.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 633 of 717

62A.3.5 Band Notch Profiles

In certain deployments, 10PASS-TS operation may interfere with nearby amateur radio equipment. The Band Notch profiles specify notches that 10PASS-TS PHYs shall add to their transmit PSDs when selected.

Table 62A-3—UPBO Reference PSD Profiles
(f is in MHz, the PSD level is in dBm/Hz)

#	Reference PSD			1U	2U
1	T1.424	Noise A	M1	$-60-22.00\sqrt{f}$	$-60-17.18\sqrt{f}$
2			M2	$-53-24.47\sqrt{f}$	$-54-18.93\sqrt{f}$
3		Noise F	M1	$-60-18.54\sqrt{f}$	$-60-16.865\sqrt{f}$
4			M2	$-53-21.19\sqrt{f}$	$-54-18.69\sqrt{f}$
5	ETSI TS 101 270-1	Noise A&B		$-47.3-28.01\sqrt{f}$	$-54-19.22\sqrt{f}$
6		Noise C		$-47.3-21.14\sqrt{f}$	$-54-16.29\sqrt{f}$
7		Noise D		$-47.3-26.21\sqrt{f}$	$-54-17.36\sqrt{f}$
8		Noise E		$-47.3-27.27\sqrt{f}$	$-54-18.1\sqrt{f}$
9		Noise F		$-47.3-19.77\sqrt{f}$	$-54-15.77\sqrt{f}$

When a notch is activated, the transmitter shall reduce its PSD to less than –80 dBm/Hz in the frequencies of the notch. More than one notch may be activated at one time.

All Band Notches specified in the following standards shall be supported:

a) ITU-T Recommendation G.993.1 Annex F, Table F-5
b) T1.424, Clause 15
c) ETSI TS1 101 270 subclause 9.3.3.6.1

The Band Notch Profiles are listed for information in Table 62A-4. This table includes notches that are above 12MHz, that are therefore outside the scope of this standard.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 634 of 717

Table 62A-4—Band Notch Profile Definitions

Band Notch Profile	Specification			Start Frequency (MHz)	End Frequency (MHz)
	ITU-T Rec. G.993.1	T1.424	TS 101 270-1		
1	Table F-5 #01	—	—	1.810	1.825
2	Table 6-2	Table 15-1	Table 17	1.810	2.000
3	Table F-5 #02	—	—	1.9075	1.9125
4	Table F-5 #03	—	—	3.500	3.575
5	Table 6-2	—	Table 17	3.500	3.800
6	—	Table 15-1	—	3.500	4.000
7	Table F-5 #04	—	—	3.747	3.754
8	Table F-5 #05	—	—	3.791	3.805
9	Table 6-2	—	Table 17	7.000	7.100
10	Table F-5 #06	Table 15-1	—	7.000	7.300
11	Table 6-2	Table 15-1	Table 17	10.100	10.150
—	Table 6-2 Table F-5 #08	Table 15-1	Table 17	14.000	14.350
—	Table 6-2 Table F-5 #09	Table 15-1	Table 17	18.068	18.168
—	Table 6-2 Table F-5 #10	Table 15-1	Table 17	21.000	21.450
—	Table 6-2 Table F-5 #11	Table 15-1	Table 17	24.890	24.990
—	Table 6-2	—	Table 17	28.000	29.100
—	Table F-5 #12	Table 15-1	—	28.000	29.700

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 635 of 717

62A.3.6 Payload rate profiles

The Payload Rate Profile describes the payload bitrate as seen at the MII interface.

The Payload Rate Profile consists of a payload rate for each of the downstream and upstream directions. The profile is specified in the format Drate/Urate as the payload bitrate that the PHY link shall provide, where *Drate* and *Urate* are expressed in Mb/s. For example a Payload Rate Profile of 10/2.5 corresponds to a downstream payload rate of 10 Mb/s and an upstream payload rate of 2.5 Mb/s. *Drate* values of 2.5, 5, 7.5, 10, 12.5, 15, 25, 35, 50, 70, and 100 shall be supported where the loop environment, bandplan and PSD mask allow this. *Urate* values of 2.5, 5, 7.5, 10, 12.5, 15, 25, 35, and 50 shall be supported where the loop environment, bandplan and PSD mask allow this. This leads to a total of 9 symmetric and 90 asymmetric Payload Rate Profiles.

The selected Payload Rate Profile sets a target for the PHY's operation. If the payload rates of the selected profile cannot be achieved based on the loop environment, bandplan and PSD mask, the PHY shall drop the link.

62A.3.7 Complete profiles

The complete PMD operation of the 10PASS-TS PHY can be selected by choosing one Bandplan and PSD Mask profile, one UPBO Reference PSD profile, one Payload Rate profile, and any number of Band Notch profiles.

62A.3.8 Default profile

A 10PASS-TS device that is not managed (i.e., no management functions are provided, or enabled) shall operate in the default profile and the default mode specified in this subclause and summarized in Table 62A-5.

Table 62A-5—Default profile and default mode settings

Profile / Setting	Value
Payload bitrate profile	10/10
Bandplan and PSD mask profile	#1
Band notch profiles	#2, #6, #10, and #11
UPBO reference PSD profile	#3
Reed-Solomon setting	(240, 224)
Interleaver setting	I=30, M=62

The default profile shall consist of the 10/10 payload bitrate profile, bandplan and PSD mask profile #1, band notch profiles #2, #6, #10, and #11 enabled, and UPBO reference PSD profile #3.

In addition, the default mode of 10PASS-TS implementations shall use Reed-Solomon setting (240, 224)[25], and interleaver setting I=30, M=62.

NOTE—The default profile may not be spectrally compatible to any particular regional requirement, nor may it be the optimal profile for a particular cable segement.

[25]See 62.2.4.2.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 636 of 717

62A.4 Register settings

Tables 62A-6 through 62A-8 contain the register settings required to implement the profiles described in this Annex. The referenced registers are defined in 45.2.

Table 62A-6 contains the MCM tone group definitions to be used in order to support the band plan profiles described in 62A.3.2. For each of the listed tone groups, the Tone Active and/or Tone Direction bits in the 10P MCM tone control parameter register shall be set according to the use indicated in the first column of the table.

Table 62A-6—MCM register settings implementing bandplan profiles

Band Allocation	Band Plan A 10P MCM Tone Group Register		Band Plan B 10P MCM Tone Group Register		Band Plan C 10P MCM Tone Group Register		Band Plan Ann. F 10P MCM Tone Group Register	
	lower	upper	lower	upper	lower	upper	lower	upper
0 (upstream, downstream or not used)	0007_{16}	$001F_{16}$	0007_{16}	$001F_{16}$	0007_{16}	$001F_{16}$	0007_{16}	$001F_{16}$
1D (downstream)	0021_{16}	0365_{16}	0021_{16}	$02B7_{16}$	0021_{16}	0243_{16}	0021_{16}	0365_{16}
1U (upstream)	0367_{16}	$04B5_{16}$	$02B9_{16}$	$049E_{16}$	0245_{16}	0365_{16}	0367_{16}	$04B5_{16}$
2D (downstream)	$04B7_{16}$	$07B2_{16}$	$04A0_{16}$	0662_{16}	0367_{16}	fx1[a]	$04B7_{16}$	$07B2_{16}$
2U (upstream)	$07B4_{16}$	$0ADE_{16}$	0664_{16}	$0ADE_{16}$	fx2[b]	$0ADE_{16}$	$07B4_{16}$	$0ADE_{16}$
3D (down-stream)[c]	$0ADF_{16}$	$0EF2_{16}$	—	—	—	—	—	—

[a]Values for fx1 shall be in the range 0369_{16} to $0ADA_{16}$
[b]Values for fx2 shall be in the range (fx1 + 2) to $0ADE_{16}$
[c]Band 3D is only used in Band Plan and PSD Mask profile #30.

Unlike the other parameters governed by the profiles specified in the Annex, PSDs are typically defined by means of a functional expression, rather than a set of values. Transmit PSDs and Reference PSDs typically vary for each individual tone. A pseudo-C procedure for setting a PSD profile and a Reference PSD profile is shown in Equation (62A–1) below. It assumes the existence of the functions getPSDLevel(float frequencyInKHz) and getReferencePSD(float frequencyInKHz) specifying the transmit PSD and Reference PSD respectively, both expressed as a floating-point value in dBm/Hz. Registers are addressed by means of pointers ToneGroupRegister, ToneControlParameterRegister and ToneControlActionRegister.

```
for (int tone=0;tone<4096;tone++) {
 ToneGroupRegister[0] = tone;               // set lower bound of tone group
 ToneGroupRegister[1] = tone;               // set upper bound of tone group
                                            // to the same value
 short TxPSD = floor(4*(getPSDLevel(tone*4.3125)+100)) & 0x01FF;
                                            // convert to 9-bit value
 ToneControlParameterRegister[1] &= 0xFFFC; // clear first two bits of PSD level
 ToneControlParameterRegister[2] &= 0x01FF; // clear remaining 7 bits of PSD level
 ToneControlParameterRegister[1] |= TxPSD >> 7;// store first two bits of PSD level
 ToneControlParameterRegister[2] |= (TxPSD << 9) & 0xFE00;
                                            // store remaining 7 bits of PSD level
 short RefPSD = floor(4*(getReferencePSD(tone*4.3125)+100)) & 0x01FF;
                                            // convert to 9-bit value
 ToneControlParameterRegister[2] &= 0xFFE0; // clear Reference PSD level
 ToneControlParameterRegister[2] |= RefPSD; // store Reference PSD level
 *ToneControlActionRegister |= 0x0020;      // refresh contents of the selected
                                            // tones entries in table
}
*ToneControlActionRegister |= 0x0002;       // activates PSD level setting as in
                                            // ToneControlParameterRegister
*ToneControlActionRegister |= 0x0001;       // activates UPBO Ref. PSD level
                                            // setting as in
                                            // ToneControlParameterReg          (62A–1)
```

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 637 of 717

Functions specifying standard transmit PSDs can be found in the documents referenced in 62A.3.3. Functions specifying UPBO Reference PSDs can be found in Table 62A-3.

Table 62A-7 contains the MCM tone group definitions to be used in order to support the band notch profiles desribed in 62A.3.5. For each of the listed tone groups, the Tone Active bit in the 10P MCM tone control parameter register shall be cleared to activate the corresponding band notch.

Table 62A-7—MCM register settings implementing band notch profiles

Band Notch Profile	10P MCM Tone Group Register	
	lower	upper
1	$01A3_{16}$	$01A7_{16}$
2	$01A3_{16}$	$01D0_{16}$
3	$01B9_{16}$	$01BB_{16}$
4	$032B_{16}$	$033D_{16}$
5	$032B_{16}$	0371_{16}
6	$032B_{16}$	$03A0_{16}$
7	0364_{16}	0366_{16}
8	$036E_{16}$	0372_{16}
9	0656_{16}	$066E_{16}$
10	0656_{16}	$069D_{16}$
11	0925_{16}	0932_{16}

Table 62A-8 contains the MCM register settings for the payload rate profiles listed in 62A.3.6. When operating under a payload rate profile, the minimum and maximum data rates in the 10P MCM upstream/ downstream data rate configuration registers shall be set to the same value.

Table 62A-8—MCM register settings implementing payload rate profiles

Profile (payload rate in Mb/s)	Downstream Data Rate Configuration Register setting (bits 15:0)	Upstream Data Rate Configuration Register setting (bits 15:0)
2.5	0027_{16}	0027_{16}
5	$004E_{16}$	$004E_{16}$
7.5	0075_{16}	0075_{16}
10	$009C_{16}$	$009C_{16}$
12.5	$00C3_{16}$	$00C3_{16}$
15	$00EA_{16}$	$00EA_{16}$
25	0186_{16}	0186_{16}
35	0222_{16}	0222_{16}
50	$030D_{16}$	$030D_{16}$
70	0445_{16}	no profile defined
100	$061A_{16}$	no profile defined

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 638 of 717

62A.5 Protocol Implementation Conformance Statement (PICS) proforma for Annex 62A, PMD profiles for 10PASS-TS[26]

62A.5.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Annex 62A, PMD profiles for 10PASS-TS, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

62A.5.2 Identification

62A.5.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification.

The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).

62A.5.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, PMD profiles for 10PASS-TS.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

62A.5.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
10PProf	PMD profiles for 10PASS-TS	Annex 62A	The PMD profiles listed in Annex 62A are supported.	10PASS-TS: M	Yes [ ]

[26]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 639 of 717

62A.5.4 PICS proforma tables for PMD profiles for 10PASS-TS

Item	Feature	Subclause	Value/Comment	Status	Support
10PProf-1	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHYs is capable of operating in all profiles listed in this Clause.	M	Yes [ ]
10PProf-2	Bandplan and PSD mask profiles	62A.3.1	The VDSL bandplans defined in ITU-T Recommendation G.993.1 are supported.	M	Yes [ ]
10PProf-3	Bandplan and PSD mask profiles	62A.3.1	The VDSL PSD Masks defined in ITU-T Recommendation G.993.1, T1.424 and ETSI TS 101 270-1 are supported by all 10PASS-TS PMDs.	M	Yes [ ]
10PProf-4	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #1 as specified in Table 62A-1.	M	Yes [ ]
10PProf-5	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #2 as specified in Table 62A-1.	M	Yes [ ]
10PProf-6	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #3 as specified in Table 62A-1.	M	Yes [ ]
10PProf-7	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #4 as specified in Table 62A-1.	M	Yes [ ]
10PProf-8	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #5 as specified in Table 62A-1.	M	Yes [ ]
10PProf-9	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #6 as specified in Table 62A-1.	M	Yes [ ]
10PProf-10	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #7 as specified in Table 62A-1.	M	Yes [ ]
10PProf-11	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #8 as specified in Table 62A-1.	M	Yes [ ]
10PProf-12	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #9 as specified in Table 62A-1.	M	Yes [ ]
10PProf-13	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #10 as specified in Table 62A-1.	M	Yes [ ]
10PProf-14	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #11 as specified in Table 62A-1.	M	Yes [ ]
10PProf-15	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #12 as specified in Table 62A-1.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 640 of 717

10PProf-16	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #13 as specified in Table 62A-1.	M	Yes [ ]
10PProf-17	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #14 as specified in Table 62A-1.	M	Yes [ ]
10PProf-18	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #15 as specified in Table 62A-1.	M	Yes [ ]
10PProf-19	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #16 as specified in Table 62A-1.	M	Yes [ ]
10PProf-20	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #17 as specified in Table 62A-1.	M	Yes [ ]
10PProf-21	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #18 as specified in Table 62A-1.	M	Yes [ ]
10PProf-22	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #19 as specified in Table 62A-1.	M	Yes [ ]
10PProf-23	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #20 as specified in Table 62A-1.	M	Yes [ ]
10PProf-24	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #21 as specified in Table 62A-1.	M	Yes [ ]
10PProf-25	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #22 as specified in Table 62A-1.	M	Yes [ ]
10PProf-26	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #23 as specified in Table 62A-1.	M	Yes [ ]
10PProf-27	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #24 as specified in Table 62A-1.	M	Yes [ ]
10PProf-28	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #25 as specified in Table 62A-1.	M	Yes [ ]
10PProf-29	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #26 as specified in Table 62A-1.	M	Yes [ ]
10PProf-30	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #27 as specified in Table 62A-1.	M	Yes [ ]
10PProf-31	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #28 as specified in Table 62A-1.	M	Yes [ ]
10PProf-32	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #29 as specified in Table 62A-1.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 641 of 717

10PProf-33	Bandplan and PSD mask profiles	62A.3.1	The 10PASS-TS PHY is capable of operating in profile #30 as specified in Table 62A-1.	M	Yes [ ]
10PProf-34	UPBO Reference PSD Profiles	62A.3.4	The implementation supports all UPBO Reference PSDs listed in Table 62A-3.	M	Yes [ ]
10PProf-35	Band Notch Profiles	62A.3.5	The 10PASS-TS PHY adds the notches specified by the band notch profile to their transmit PSDs when selected.	M	Yes [ ]
10PProf-36	Band Notch Profiles	62A.3.5	When a notch is activated, the transmitter reduces its PSD to less than -80 dBm/Hz in the frequencies of the notch.	M	Yes [ ]
10PProf-37	Band Notch Profiles	62A.3.5	All Band Notches specified in the following standards are supported: -ITU-T Recommendation G.993.1 Annex F, Table F-5 -T1.424, Clause 15 -ETSI TS1 101 270 subclause 9.3.3.6.1	M	Yes [ ]
10PProf-38	Payload rate profiles	62A.3.6	Drate values of 2.5, 5, 7.5, 10, 12.5, 15, 25, 35, 50, 70, and 100 are supported where the loop environment, bandplan and PSD mask allow this.	M	Yes [ ]
10PProf-39	Payload rate profiles	62A.3.6	Urate values of 2.5, 5, 7.5, 10, 12.5, 15, 25, 35, and 50 are supported where the loop environment, bandplan and PSD mask allow this.	M	Yes [ ]
10PProf-40	Payload rate profiles	62A.3.6	If the payload rates of the selected profile cannot be achieved based on the loop environment, bandplan and PSD mask, the PHY drops the link.	M	Yes [ ]
10PProf-41	Default profile	62A.3.8	A 10PASS-TS device that is not managed operates in the default profile and the default mode specified in 62A.3.8 and summarized in Table 62A-5.	M	Yes [ ]
10PProf-42	Register settings	62A.4	For each of the listed tone groups, the Tone Active and/or Tone Direction bits in the 10P MCM tone control parameter register are set according to the use indicated in the first column of Table 62A-6.	M	Yes [ ]
10PProf-43	Register settings	62A.4	For each of the listed tone groups, the Tone Active bit in the 10P MCM tone control parameter register are cleared to activate the corresponding band notch.	M	Yes [ ]
10PProf-44	Register settings	62A.4	When operating under a payload rate profile, the minimum and maximum data rates in the 10P MCM upstream/ downstream data rate configuration registers are set to the same value.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 642 of 717

Annex 62B

(normative)

Performance guidelines for 10PASS-TS PMD profiles

62B.1 Introduction and rationale

Annex 62B defines performance guidelines for 10PASS-TS PMD profiles. The definition of these guidelines is challenging due to the varying nature of the access network. The access network has large variations in cable characteristics from region to region. In addition, the make-up of a cable can encompass multiple cable gauges and/or different configuration of bridged taps. Finally, services may vary from region to region creating different noise scenarios. Typically, deployment guidelines are a function of the telecommunications operator, which is operating a loop and the regional spectrum management policies, which govern deployment on that loop.

Given that one cannot test every possible combination of loop make-up and noise conditions, the performance guidelines are covered from two perspectives. Firstly, 62B.3 lists a suite of artificial tests crafted to test the 10PASS-TS PHYs under representative worst-case noise and loop conditions. Secondly, 62B.4 defines a deployment guideline rule which allows a service provider to determine whether a given loop will support a given profile.

62B.2 Relationship to other clauses

Annex 62A lists a set of PMD profiles for 10PASS-TS. Clause 30 describes how the selection of Annex 62A profiles is exported to a management entity. Clause 45 registers describe an optional mechanism for configuring a 10PASS-TS PHY to use a particular profile. The register settings for each profile are contained in 62A.4.

62B.3 Performance test cases

The performance test cases are derived from the standard definition of test loops in T1.424/Trial-Use, part 1, section 13.2, the noise models are defined in T1.424/Trial-Use, part 1, section 13.3 and the profiles are defined in 62A.3.1. In all cases the PHYs shall attain link in the specified profile in the presence of noise and impairments and maintain link with a Bit Error Ratio less than 10^{-7} with the noise raised by 6dB.

During the test the PHY shall meet the requirements of the bandplan, PSD and Upstream Power Back Off (where appropriate) specified. The control of the profile shall be through the Clause 30 MIB if supported. If the PHY under test includes any implementation options defined in the reference document (but out of scope for this standard) these options shall be disabled in such a manner as to render the behaviour identical to implementations without such options.

If a PHY is capable of operating as both CO-subtype and CPE-subtype then both modes of operation shall be tested. If the PHY is capable of supporting PME aggregation then each PME shall be capable of passing the performance tests independently.

Table 62B-1 lists the performance test cases. The test loops are described in T1.424/Trial-Use, part 1, section 13.2. For tests using test loop “VDSL1” the table specifies which of the two cable types (TP1 or TP2) is used. The length value refers to the dimension “x”, “y”, “z”, “u” or “v” depending on the test loop. If “notch” is specified to be “on” then the RF notches specified in T1.424/Trial-Use, part 1, Annex 1 are applied as described in section 13.3.3. If “UPBO” is specified to be “on” then the Power Back Off specified in 62.3.4.1 is applied. The noise model applied will be noise model “A” or “F” as described in T1.424/Trial-Use, part 1, section 13.3.1.1 (also 13.3.1.4.2). The definition of self crosstalk is in section 13.3.1.4.1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 643 of 717

Table 62B-1—Test cases for 10PASS-TS

Test	Test Loop	L (m)	Profile	Payload Data Rate down/up (Mb/s)	Notch	UPBO	Noise Model[a]
1	TP1	750	13	10/10	—	5	AWGN
2	TP2	750	13	10/10	—	5	ETSI A
3	TP2	300	1	10/10	—	1	T1.424 A
4	TP2	200	16	50/50	—	—	AWGN
5	TP2	100	16	35/25	—	—	self
6	TP1	650	6	25/5	—	—	self
7	TP2	700	17	15/15	—	—	self
8	TP1	1000	8	15/2.5	—	—	self
9	TP2	400	4	12.5/12.5	—	—	self
10	TP2	750	4	7.5/7.5	—	—	self
11	TP2	1000	23	5/5	—	—	self
12	TP2	1200	23	2.5/2.5	—	—	self
13	TP2	150	16	50/50	2, 5, 9, 11	—	AWGN
14	TP2	100	16	35/25	2, 5, 9, 11	—	self
15	TP1	650	6	25/5	2, 6, 10, 11	—	self
16	TP2	600	17	15/15	2, 5, 9, 11	—	self
17	TP1	1000	8	15/2.5	2, 6, 10, 11	—	self
18	TP2	400	4	12.5/12.5	2, 6, 10, 11	—	self
19	TP2	750	4	7.5/7.5	2, 6, 10, 11	—	self
20	TP2	900	23	5/5	2, 5, 9, 11	—	self
21	TP2	1200	23	2.5/2.5	2, 5, 9, 11	—	self
22	TP2	150	30	100/25	—	—	AWGN

[a]"AWGN" means that only white gaussian noise at -140dBm/Hz is present. "Self" means that the equivalent crosstalk generated by 20 10PASS-TS transceivers operating in the same mode (assuming the same loop length and the same UPBO configuration) as the device under test is present in addition to white gaussian noise at -140dBm/Hz. "T1.424 A" means that alien crosstalk according to T1.424 Noise Model A is present in addition to white gaussian noise at –140dBm/Hz. "ETSI A" means that alien crosstalk according to ETSI TS 101 270-1 Noise Model A is present in addition to white gaussian noise. Self crosstalk and alien crosstalk are not to be applied simultaneously.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 644 of 717

62B.3.1 Additional tests

Additional testing to prove the requirements for link establishment, UPBO, burst noise immunity, link state and error reporting, etc. may be performed using any test scenarios from Table 62B-1.

62B.4 Deployment guidelines

The relationship between specific cable parameters and performance is complex and cannot be guaranteed. The performance tests described in section 62B.3 are designed to ensure that compliant PHYs will achieve a similar level of performance when applied in similar environments. The tests are designed to represent realistic worst case conditions but real world installations may sometimes experience worse performance for apparently similar conditions.

Reference specification TS 101 270, part 1, Annex A contains some additional information regarding performance expectations related to cable parameters.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 645 of 717

62B.5 Protocol Implementation Conformance Statement (PICS) proforma for Annex 62B, Performance guidelines for 10PASS-TS PMD profiles[27]

62B.5.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Annex 62B, Performance guidelines for 10PASS-TS PMD profiles, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

62B.5.2 Identification

62B.5.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	
Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification. The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).	

62B.5.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Performance guidelines for 10PASS-TS PMD profiles.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[27] *Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 646 of 717

62B.5.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
10PPerf	Performance guidelines for 10PASS-TS PMD profiles	Annex 62B	The performance guidelines listed in Annex 62B are supported.	10PASS-TS: M	Yes [ ]

62B.5.4 PICS proforma tables for Performance guidelines for 10PASS-TS PMD profiles

Item	Feature	Subclause	Value/Comment	Status	Support
10PPerf-1	Performance test cases	62B.3	In all cases the PHY attains link in the specified profile in the presence of noise and impairments and maintains link with a Bit Error Ratio less than 10^{-7} with the noise raised by 6dB.	M	Yes [ ]
10PPerf-2	Performance test cases	62B.3	During the test the PHY meets the requirements of the bandplan, PSD and Upstream Power Back Off specified.	M	Yes [ ]
10PPerf-3	Performance test cases	62B.3	The control of the profile is through the Clause 30 MIB if supported.	MDIO: M	Yes [ ] No [ ]
10PPerf-4	Performance test cases	62B.3	If the PHY under test includes any implementation options defined in the reference document these options are disabled in such a manner as to render the behaviour identical to implementations without such options.	M	Yes [ ]
10PPerf-5	Performance test cases	62B.3	If a PHY is capable of operating as both CO-subtype and CPE-subtype then both modes of operation are tested.	M	Yes [ ]
10PPerf-6	Performance test cases	62B.3	If the PHY is capable of supporting PME aggregation then each PME is capable of passing the performance tests independently.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 647 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 648 of 717

Annex 62C

(informative)

10PASS-TS Examples

62C.1 Introduction

Annex 62A contains profiles for deployment of 10PASS-TS in typical environments, as well as for testing purposes. Certain situations may require the full use of the 10PASS-TS PHY's flexibility, going beyond what is offered by the predefined profiles, in order to obtain optimal performance. Examples of such circumstances:

a) the 10PASS-TS system shares a cable bundle with a legacy system; the PSD mask can be configured to minimize crosstalk between 10PASS-TS and the legacy system
b) for a specific application, a particular symmetry ratio is required, which is not easily obtained with the standard band plans
c) the desired payload bit rates are beyond the ones that can be set by means of the standard payload rate profiles
d) other unanticipated situations

To use this flexibility, the 10PASS-TS equipment is configured by means of the appropriate Clause 45 registers. This Annex provides examples of such configurations.

62C.2 Bandplan configuration

Example situation: a user wishes to implement a custom bandplan for a 10PASS-TS deployment in a private network, in order to minimize near-end crosstalk to and from a certain legacy system.

Band plans can be configured by selecting any group of tones in the Tone Group register (45.2.1.34), and allocating them to either upstream or downstream by setting the tone direction bit to the appropriate value (0 = downstream, 1 = upstream) in the Tone Control Parameter register (45.2.1.35). This procedure is repeated until the desired number of frequency bands has been allocated. The new configuration is applied by writing binary 1 to the Change Tone Direction bit in the Tone Control Action register (45.2.1.36).

An example of a custom bandplan and PSD is shown in Figure 62C–1 (the solid line represents the upstream PSD, the dashed line represents the downstream PSD). The overall transmission power is assumed to be 14.5 dBm in either direction which is similar to the T1.424/Trial-Use M2 mask and SHDSL transmit power. The example defined here is such that it should meet VDSL compatibility requirements for up to 1524 m (5000 ft).

The example PSD was tested for spectral compatibility with existing VDSL systems using ITU-T Bandplan A (formerly known as plan 998). The spectral compatibility guideline was obtained by assuring that the new service will not disturb the guaranteed data rates for VDSL basis system as shown in Table 62C–1.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 649 of 717

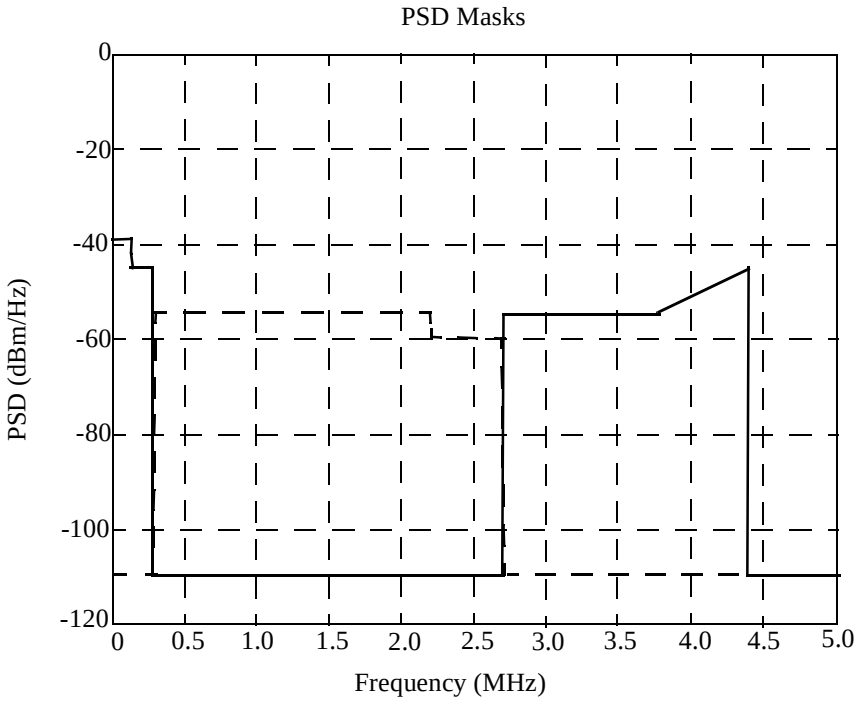


Figure 62C–1—Example PSD Masks for MCM 10PASS-TS

Table 62C–1—Required VDSL performance for spectral compatibility

Performance Level	Loop length (m)[a]	Upstream (Mb/s)	Downstream (Mb/s)
A	152.4	15.66	42.29
B	304.8	14.01	42.29
C	457.2	12.86	38.85
D	609.6	11.97	36.29
E	762.0	9.08	32.5
F	914.4	5.47	26.3
G	1066.8	3.66	22.12
H	1219.2	1.65	18.70
I	1371.6	0.42	15.40
J	1524.0	0.074	11.67

[a]NOTE—The performance requirements are taken from American National Standard T1.417, which specifies loop lengths in 500 ft (152.4 m) increments.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 650 of 717

The results of the spectral compatibility analysis are shown in Figures 62C–1 through 62C–4.

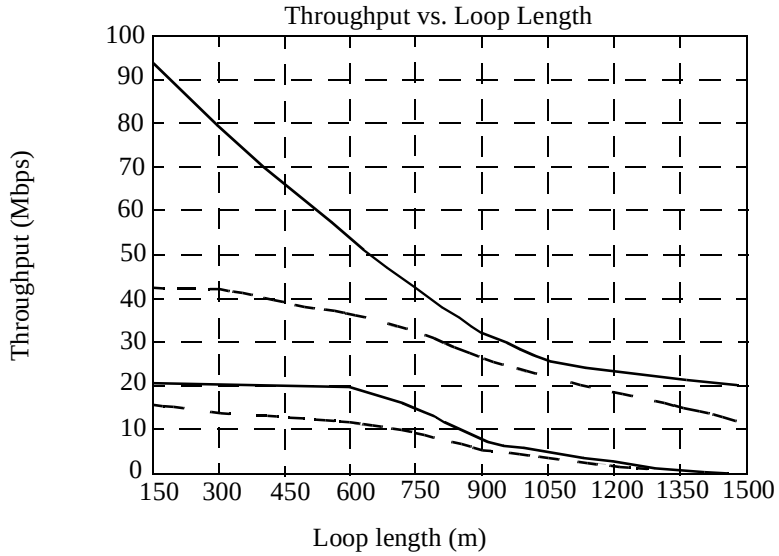


Figure 62C–2—Simulated performance of a VDSL system (using ITU-T Bandplan A) in the presence of 24 disturbers using the example PSD of this subclause.

NOTE—Dashed line = minimum VDSL performance required for spectral compatibility;
solid line = simulated VDSL performance in presence of new disturbers.

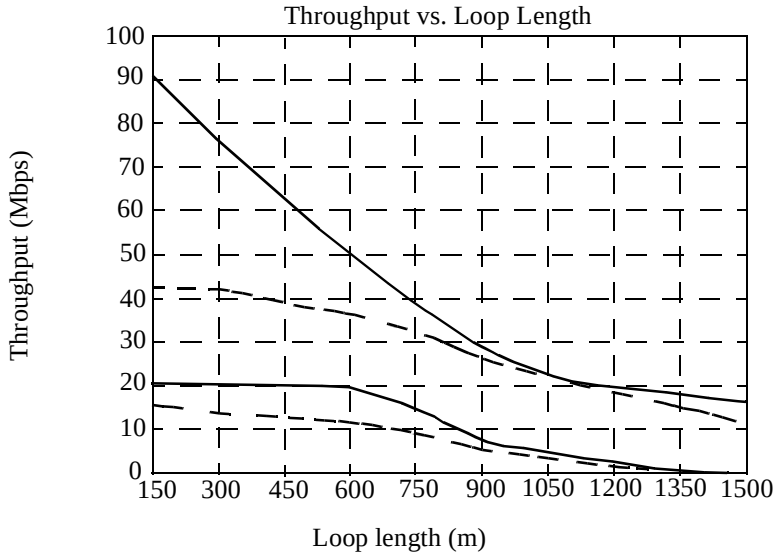


Figure 62C–3—Simulated performance of a VDSL system (using ITU-T Bandplan A) in the presence of 12 disturbers using the example PSD of this subclause and 12 disturbers using T1.417 mask SM9.

NOTE—Dashed line = minimum VDSL performance required for spectral compatibility;
solid line = simulated VDSL performance in presence of new disturbers.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 651 of 717

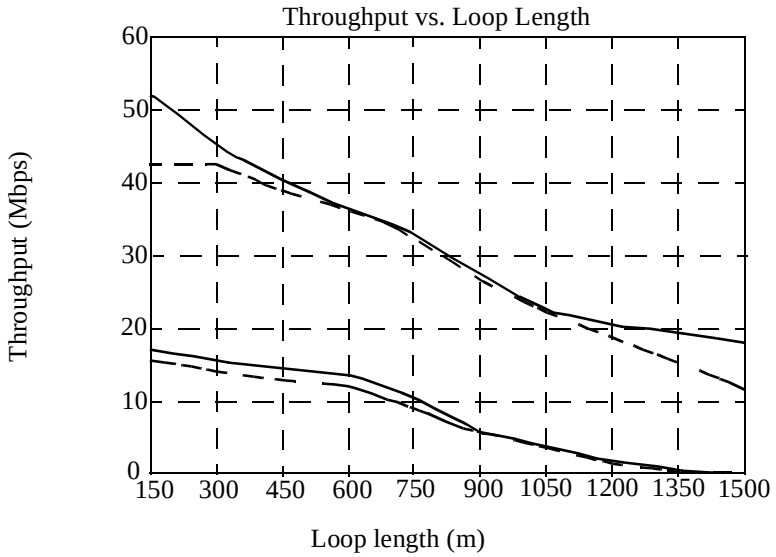


Figure 62C–4—Simulated performance of a VDSL system (using ITU-T Bandplan A) in the presence of 12 disturbers using the example PSD of this subclause and 12 disturbers using T1.417 mask SM6.

NOTE—Dashed line = minimum VDSL performance required for spectral compatibility; solid line = simulated VDSL performance in presence of new disturbers.

62C.2.1 Plan A with variable LF region

As an additional example, this subclause describes a modified version of ITU-T Bandplan A (formerly known as 998) with variable low-frequency region. Its target is to improve the reach of symmetric bitrates using 10PASS-TS or VDSL.

Plan A with variable LF region is shown in Figure 62C–5. The transition frequency between band 0 (used in upstream) and band 1D can be varied between 25 kHz and 490 kHz to boost the upstream channel bitrate. This principle is similar to the variable bandwidth capability of 2BASE-TL and SHDSL. A supporting PSD which observes spectral compatibility requirements is described in 62C.3.2.

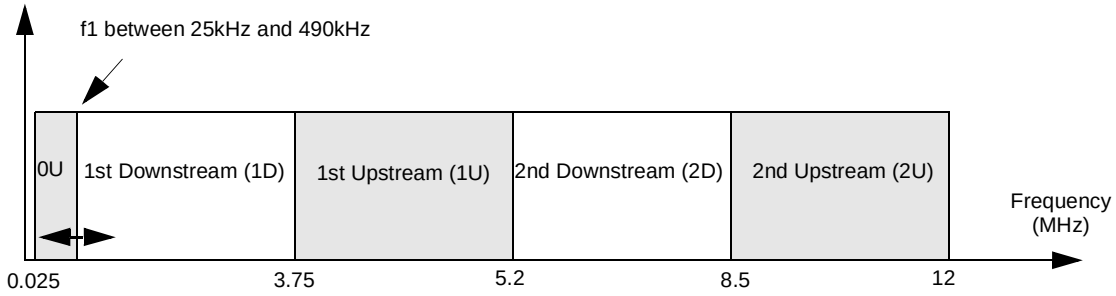


Figure 62C–5—Plan A with variable LF region

This family of bandplans can be implemented by assigning the appropriate tones to upstream and downstream, as shown in Table 62C–2.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 652 of 717

Table 62C–2—Implementation of Plan A with variable LF region

Band	Tone Group
0 (upstream)	$6 \rightarrow \lfloor f_1/(4.3125\text{kHz}) \rfloor$
1D (downstream)	$\lceil f_1/(4.3125\text{kHz}) \rceil \rightarrow 869$
1U (upstream)	$870 \rightarrow 1205$
2D (downstream)	$1206 \rightarrow 1970$
2U (upstream)	$1972 \rightarrow 2782$

62C.3 PSD mask configuration

62C.3.1 General procedure

Example situation: a mixed (transitional) deployment where certain subscribers are served with a 10PASS-TS line from a central office (longer lines), while others are served with a 10PASS-TS line from a cabinet (shorter lines). In order to guarantee high link quality for all subscribers, the transmit PSDs from the cabinet are reduced to mimic a longer line (downstream power back-off).

The properties of the different tones are configured by means of the Tone Group register (1.x.15:0; 1.x+1.15:0, defined in 45.2.1.34). The 8-bit PSD Level field in the Tone Control Parameter register (45.2.1.35) is used to set the TX PSD level for the selected group of tones. Given the tone spacing of 4.3125 kHz, a very fine-grained PSD control is possible. To implement a gradual frequency-dependent power back-off, a narrow sliding window is defined in the Tone Group register; each time the window is moved towards higher frequencies, the allowed TX PSD for that frequency range is set. The new configuration is applied by writing binary 1 to the Change PSD Level bit in the Tone Control Action register (45.2.1.36). This approach is illustrated by the algorithm in Equation (62C–1).[28]

```
for (tone=0;tone<4096;tone+=16) {
 ToneGroupRegister[0] = tone;
 ToneGroupRegister[1] = tone+16;
 ToneControlParameterRegister[1] &= 0xFFFC; // clear first 2 bits
 ToneControlParameterRegister[2] &= 0x01FF; // clear last 7 bits
 ToneControlParameterRegister[1] |= TxPSD[tone] >> 7;
 ToneControlParameterRegister[2] |= (TxPSD[tone] << 9) & 0xFE00;
}
*ToneControlActionRegister |= 0x0002; // activate PSD level setting
```

(62C–1)

62C.3.2 PSD Masks for Plan A with variable LF region

As an additional example, this subclause describes PSD masks for Plan A with variable LF region, as introduced in 62C.2.1.

In band 0 (up to f_1 between 25 kHz and 490 kHz), the PSD is limited to –50 dBm/Hz, as is the case for 2.32 Mb/s SHDSL.

The PSD in bands 1D, 1U, 2D and 2U is limited to comply with mask M2 as defined in T1.424.

[28] Variables and pointers are used as described in 62A.4.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 653 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 654 of 717

Annex 63A

(normative)

PMD Profiles for 2BASE-TL

63A.1 Introduction and rationale

Annex 63A defines the PMD profiles for 2BASE-TL. These profiles define the transmission characteristics of the PHY on the media. 2BASE-TL PHYs are required to operate across varying media quality, regulatory and noise environments. The profiles defined in this clause have two purposes.

The first is to describe a bounded set of operating modes that a party might choose from when implementing, integrating and installing 2BASE-TL equipment. 2BASE-TL PHYs are inherently flexible in their transmission capabilities. The defined profiles collect a subset of these parameters into modes that work well in most deployments. For deployments that require an operating mode not defined in this Annex, profiles can be overridden by setting PHY PMD registers directly, via Clause 45 for example.

The second purpose of the profiles is to define a set of operating modes against which PHY performance compliance may be tested. The topic of performance compliance is addressed for 2BASE-TL in Annex 63B.

63A.2 Relationship to other clauses

Clause 30 describes how the selection of Annex 63A profiles is exported to a management entity.

Clause 45 registers describe an optional mechanism for configuring a 2BASE-TL PHY to use a particular profile. The register settings for each profile are contained in 63A.4.

63A.3 Profile definitions

A 2BASE-TL profile is characterized by 4 parameters: data rate, power, constellation size and region. Different regions have different constraints on the PHY. ITU-T Recommendation G.991.2 distinguishes 3 regions and lists regional requirements in three annexes labeled A, B, C. Reference Annex A generally describes those specifications that are unique to SHDSL systems operating under conditions such as those typically encountered within the North American network; Reference Annex B, within European networks; and Reference Annex C, within networks with existing TCM-ISDN service.

The profiles of Table 63A–1 will generate a net data rate greater than 2 Mb/s at the MII interface on 1 to 4 pairs. Note that the profiles are defined on a single pair basis. The aggregation mechanism is specified in Clause 61. The data rate is the closest multiple of 64 kb/s greater than a net data rate of 2 Mb/s plus the corresponding 64/65-octet encapsulation overhead divided by the number of pairs. The line rate has an additional 8 kb/s of SHDSL overhead.

The default profile shall be profile #7 (Annex B).

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 655 of 717

Table 63A–1—2BASE-TL profiles

Profile #	Data rate per pair (kb/s)	Line rate per pair (kb/s)	Power (dBm)	Region	Constellation
1	5696	5704	13.5	Annex A sec. A.4.1	32-TCPAM
2	3072	3080	13.5	Annex A sec. A.4.1	32-TCPAM
3	2048	2056	13.5	Annex A sec. A.4.1	16-TCPAM
4	1024	1032	13.5	Annex A sec. A.4.1	16-TCPAM
5	704	712	13.5	Annex A sec. A.4.1	16-TCPAM
6	512	520	13.5	Annex A sec. A.4.1	16-TCPAM
7	5696	5704	14.5	Annex B sec. B.4.1	32-TCPAM
8	3072	3080	14.5	Annex B sec. B.4.1	32-TCPAM
9	2048	2056	14.5	Annex B sec. B.4.1	16-TCPAM
10	1024	1032	13.5	Annex B sec. B.4.1	16-TCPAM
11	704	712	13.5	Annex B sec. B.4.1	16-TCPAM
12	512	520	13.5	Annex B sec. B.4.1	16-TCPAM

63A.4 Register settings

This subclause contains Clause 45 register settings required to comply with the profiles defined in 63A.3. The 2B general parameter register (see 45.2.1.42) selects a region. The 2B PMD parameters register (see 45.2.1.43) selects values for data rate, power and constellation size. The 2B extended PMD parameters registers (see 45.2.1.57) define four additional data range sets to be used in conjunction with the 2B PMD parameters registers when additional PMD configuration detail is desired. Detailed register settings are shown in Table 63A–2.

Table 63A–2—2BASE-TL register settings

Profile #	2B general parameter register	2B PMD parameters register	
		1.81.15:0	1.82.15:0
1	0000_{16}	5959_{16}	0045_{16}
2	0000_{16}	3030_{16}	0045_{16}
3	0000_{16}	2020_{16}	0046_{16}
4	0000_{16}	1010_{16}	0046_{16}
5	0000_{16}	$0B0B_{16}$	0046_{16}
6	0000_{16}	0808_{16}	0046_{16}
7	0001_{16}	5959_{16}	$004D_{16}$
8	0001_{16}	3030_{16}	$004D_{16}$
9	0001_{16}	2020_{16}	$004E_{16}$
10	0001_{16}	1010_{16}	0046_{16}
11	0001_{16}	$0B0B_{16}$	0046_{16}
12	0001_{16}	0808_{16}	0046_{16}

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 656 of 717

63A.5 Protocol Implementation Conformance Statement (PICS) proforma Annex 63A, PMD Profiles for 2BASE-TL[29]

63A.5.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Annex 63A, PMD Profiles for 2BASE-TL, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

63A.5.2 Identification

63A.5.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification—e.g., names and versions for machines and/or operating systems; System Name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification.

The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).

63A.5.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, 2BASE-TL PMD profiles.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21; the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[29] *Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 657 of 717

63A.5.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
2BProf	2BASE-TL PMD profiles	Annex 63A	The PMD profiles listed in Annex 63A are supported.	2BASE-TL: M	Yes [ ]

63A.5.4 PICS proforma tables for Performance guidelines for 2BASE-TL PMD profiles

Item	Feature	Subclause	Value/Comment	Status	Support
2BProf-1	Default Profile	63A.3	The default profile shall be profile #7.	M	Yes [ ]
2BProf-2	Register settings	63A.4	The register settings comply with Table 63A–2.	M	Yes [ ]
2BProf-3	Profiles	63A.3	A 2BASE-TL PHY supports all profiles listed in Table 63A–1.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 658 of 717

Annex 63B

(normative)

Performance guidelines for 2BASE-TL PMD profiles

63B.1 Introduction and rationale

Annex 63B defines performance guidelines for 2BASE-TL PMD profiles. The definition of those guidelines is challenging due to the varying nature of the access network. The access network has large variations in cable characteristics from region to region. In addition, the make-up of a cable can encompass multiple cable gauges and/or different configuration of bridged taps. Finally, services may vary from region to region creating different noise scenarios. Typically, deployment guidelines are a function of the telecommunications operator, which is operating a loop and the regional spectrum management policies, which govern deployment on that loop.

Given that one cannot test every possible combination of loop make-up and noise conditions, the performance guidelines are covered from two perspectives. Firstly, 63B.3 lists a suite of artificial tests crafted to test the 2BASE-TL PHYs under representative worst-case noise and loop conditions. Secondly, 63B.4 defines a deployment guideline rule which allows a service provider to determine whether a given loop will support a given profile.

63B.2 Relationship to other clauses

Annex 63A lists a set of PMD profiles for 2BASE-TL.

Clause 30 describes how the selection of Annex 63A profiles is exported to a management entity.

Clause 45 registers describe an optional mechanism for configuring a 2BASE-TL PHY to use a particular profile. The register settings for each profile are contained in 63A.4.

63B.3 Performance test cases.

The profiles associated with the 5696, 3072, 1024, 704 and 512 kb/s (profiles 1, 2, 4, 5 and 6) shall satisfy the tests described in Table 63B-1. The same test methodology defined in G.991.2 Annex A shall be applied. The test cases are numbered 57 to 78 to differentiate them from the existing tests 1 to 56 in Table A-1 of G.991.2. Profile 3 shall successfully pass the corresponding tests described in Table A-1 of G.991.2.

Table 63B-1—Additional tests for the Annex A data rate

Test	Test loop	L (km)	Test unit	Payload data rate (kb/s)	PSD	Interferer Combination	Required Margin (dB)
57	S	2.80	2BASE-TL-O	1024	symmetric	49-HDSL	5 + Δ*
58	BT1-C	2.47	2BASE-TL-O	1024	symmetric	49-SHDSL_768_sym	5 + Δ*
59	BT1-C	2.47	2BASE-TL-O	1024	symmetric	49-HDSL	5 + Δ*
60	S	2.83	2BASE-TL-R	1024	symmetric	49-HDSL	5 + Δ*
61	BT1-R	2.47	2BASE-TL-R	1024	symmetric	49-SHDSL_768_sym	5 + Δ*
62	BT1-R	2.47	2BASE-TL-R	1024	symmetric	49-HDSL	5 + Δ*

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 659 of 717

Table 63B-1—Additional tests for the Annex A data rate *(continued)*

Test	Test loop	L (km)	Test unit	Payload data rate (kb/s)	PSD	Interferer Combination	Required Margin (dB)
63	S	3.44	2BASE-TL-O	704	symmetric	49-HDSL	5 + Δ*
64	BT1-C	3.17	2BASE-TL-O	704	symmetric	49-SHDSL_768_sym	5 + Δ*
65	BT1-C	3.17	2BASE-TL-O	704	symmetric	49-HDSL	5 + Δ*
66	S	3.44	2BASE-TL-R	704	symmetric	49-HDSL	5 + Δ*
67	BT1-R	3.17	2BASE-TL-R	704	symmetric	49-SHDSL_768_sym	5 + Δ*
68	BT1-R	3.17	2BASE-TL-R	704	symmetric	49-HDSL	5 + Δ*
69	S	4.08	2BASE-TL-O	512	symmetric	49-HDSL	5 + Δ*
70	BT1-C	3.75	2BASE-TL-O	512	symmetric	49-SHDSL_768_sym	5 + Δ*
71	BT1-C	3.75	2BASE-TL-O	512	symmetric	49-HDSL	5 + Δ*
72	S	4.08	2BASE-TL-R	512	symmetric	49-HDSL	5 + Δ*
73	BT1-R	3.75	2BASE-TL-R	512	symmetric	49-SHDSL_768_sym	5 + Δ*
74	BT1-R	3.75	2BASE-TL-R	512	symmetric	49-HDSL	5 + Δ*
75	S	1.37	2BASE-TL-O	3072	symmetric	49-SHDSL_2304 (case 11)	5 + Δ*
76	S	1.37	2BASE-TL-R	3072	symmetric	49-SHDSL_2304 (case 11)	5 + Δ*
77	S	0.85	2BASE-TL-O	5696	symmetric	24-HDSL2+24-T1 (case 4)	5 + Δ*
78	S	0.85	2BASE-TL-R	5696	symmetric	24-HDSL2+24-T1 (case 14)	5 + Δ*

Profiles 7 and 8 shall be tested using tests B-1 to B-4 defined in Table 63B-2. The same test methodology defined in G.991.2 Annex B shall be applied. Profile 9, 10 and 12 shall be tested using the tests defined in Annex B of ITU-T Recommendation G.991.2. The loops defined in Annex B do not scale as well as the loops of Annex A because they are defined in terms of insertion loss at a given frequency (with a granularity of 0.5 dB), rather than a length in meters. The 704 kb/s data rate (profile 11) is expected to successfully pass the test associated with the 768 kb/s data rate. Therefore, for Annex B testing, the 704 kb/s data rate shall be tested using the 768 kb/s test.

Table 63B-2—Additional tests for the Annex B data rate

Test	Test loop	L (km)	Test unit	Payload data rate (kb/s)	PSD	Interferer Combination[a]	Required Margin (dB)
B-1	Loop 2	1.37	2BASE-TL-O	3072	symmetric	C2048sD2	5 + Δ*
B-2	Loop 2	1.37	2BASE-TL-R	3072	symmetric	R1536sB2	5 + Δ*
B-3	Loop 2	0.85	2BASE-TL-O	5696	symmetric	C2304sD2	5 + Δ*
B-4	Loop 2	0.85	2BASE-TL-R	5696	symmetric	R2048sA2	5 + Δ*

[a]The following nomenclature is used to describe Annex B noise shapes: ABBBCDE; where A is the Side (either C or R), BBB, the rate, C the PSD type (either ‘s’ for symmetric or ‘a’ for asymmetric), D the Noise type (A,B,C or D) and E, the loop number (from 1 to 7).

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 660 of 717

63B.4 Deployment Guidelines

The ITU-T G.991.2 defines an equivalent loop attenuation which can be used to determine whether a cable insertion loss function 1/H(f), can support a given profile associated with a nominal transmit signal power spectral density S(f). The loop attenuation should not be confused with another popular metric called the loop insertion loss at a given frequency. The latter specifies the insertion loss of the loop at a single frequency while the former weights the transmitted signal PSD and insertion loss of the loop over a frequency range corresponding to the transmitted signal bandwidth. The loop attenuation provides a more precise estimate of the loop capability to support a given data rate.

The SHDSL Loop Attenuation shall be defined as follows (section 9.5.5.7.5 of G.991.2):

$$LoopAtten_{SHDSL}(H) = \frac{2}{f_{\text{Baud}}}\left(\int_{0}^{\frac{f_{\text{Baud}}}{2}} 10\log\left[\sum_{n=0}^{1} S(f - nf_{\text{Baud}}) \right] df - \int_{0}^{\frac{f_{\text{Baud}}}{2}} 10\log\left[\sum_{n=0}^{1} S(f - nf_{\text{Baud}}) \left| H(f - nf_{\text{Baud}}) \right|^2 \right] df \right) \quad \text{(63B–1)}$$

where f_{Baud} is the symbol rate, $1/H(f)$ is the insertion loss of the loop, and $S(f)$ is the nominal transmit PSD.

Table 63B-3 lists the maximum loop attenuation for a margin of 5 dB assuming the presence of 49 and 12 self-interferers for the profiles defined in Annex 63A. The 49 self-interferer case corresponds to a very conservative deployment reach.

Assuming a data rate of 2048 kb/s, the deployment reach for AWG24 gauge cable corresponds to 2.8 km for the 49-self number and 3.2 km for the 12-self number.

Table 63B-3—Loop attenuation guideline

Profile	Data rate (kb/s)	Maximum SHDSL Loop Attenuation for 49-self-interferers	Maximum SHDSL Loop Attenuation for 12-self-interferers
2 and 7	2048	24.0	27.7
3 and 8	1024	28.6	32.1
4 and 9	704	31.0	34.7
5 and 10	512	33.1	36.7

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 661 of 717

63B.5 Protocol Implementation Conformance Statement (PICS) proforma for Annex 63B, Performance guidelines for 2BASE-TL PMD profiles[30]

63B.5.1 Introduction

The supplier of a protocol implementation that is claimed to conform to Annex 63B, Performance guidelines for 2BASE-TL PMD profiles, shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A detailed description of the symbols used in the PICS proforma, along with instructions for completing the PICS proforma, can be found in Clause 21.

63B.5.2 Identification

63B.5.2.1 Implementation identification

Supplier	
Contact point for enquiries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification--e.g., names and versions for machines and/or operating systems; System Name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirements for the identification.

The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).

63B.5.2.2 Protocol summary

Identification of protocol standard	IEEE Std 802.3ah-2004, Performance guidelines for 2BASE-TL PMD profiles.
Identification of amendments and corrigenda to this PICS proforma that have been completed as part of this PICS	
Have any Exception items been required? No [ ] Yes [ ] (See Clause 21, the answer Yes means that the implementation does not conform to IEEE Std 802.3ah-2004.)	
Date of Statement	

[30]*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Copyright © 2004 IEEE. All rights reserved.

63B.5.3 Major capabilities/options

Item	Feature	Subclause	Value/Comment	Status	Support
2BPerf	Performance guidelines for 2BASE-TL PMD profiles	Annex 63B	The performance guidelines listed in Annex 63B are supported.	2BASE-TL: M	Yes [ ]

63B.5.4 PICS proforma tables for Performance guidelines for 2BASE-TL PMD profiles

Item	Feature	Subclause	Value/Comment	Status	Support
2BPerf-1	Performance	63B.3	A 2BASE-TL PHY successfully passes the performance tests described in 63B.3.	M	Yes [ ]

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 663 of 717

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 664 of 717

Annex 67A

(informative)

Environmental characteristics for Ethernet subscriber access networks

67A.1 Introduction

The purpose of EFM and its distinction from traditional Ethernet networks, is that it specifies functionality required for the subscriber access network, i.e., public network access. Network design considerations for "public" access that may differ from traditional Ethernet LANs include the operations, administration and management (OAM) function, and the regulatory requirements, as well as the environmental factors which are addressed in this annex. This annex applies to all sections of 802.3ah with particular relevance for Clause 58, Clause 59, and Clause 60.

The optical link is expected to operate over a reasonable range of environmental conditions related to temperature, humidity, and physical handling (such as shock and vibration). Implementers are expected to indicate in their literature the operating environmental conditions to facilitate selection, installation, and maintenance, and may also give summary information on a product label. The normative specifications of this standard are understood to apply over the range of conditions defined by the implementer.

This informative annex provides information, to both the design engineer and the eventual user of specific product implementations, on the environmental factors to be considered when designing EFM network topologies. It is intended to record the assumptions used in developing the specifications contained in the normative specifications. The following sections give an example of likely deployment of the different physical layer types, followed by a discussion of temperature issues. Informative references may be found in Annex A.

It is believed that the most critical environmental factor on an Ethernet terminal will be temperature and that the most temperature sensitive element in a link is the semiconductor laser. The temperature sensitivity of these components may impact potential deployment scenarios if not considered. The remaining environmental factors (humidity, vibration, etc.) are not considered to be of such major importance and may be handled by conventional design practice. Therefore, the remainder of this annex addresses temperature.

67A.1.1 Terminal deployment scenarios

The terminal equipment of a link may or may not be in a weather-protected environment. 100BASE-LX10 and 1000BASE-LX10 links may be widely deployed with conventional building cabling for general purpose IT applications, as well as in Ethernet subscriber access applications. The other link types in Table 67A–1 are intended for Ethernet subscriber access applications. The table gives an example deployment scenario. Other scenarios are also supported by this standard, and may be deployed in significant numbers.

This example scenario places the customer premises equipment in a non-weather-protected position, e.g. the outside wall of a house, to allow ease of access for installation and maintenance. Where the premises is a large building such as a hotel, apartment block or office, a weather-protected space such as a basement within the building may be accessible enough.

It is expected that the physical format of the equipment at each end of the link will be different; however, this is outside the scope of the standard. The physical layer type (e.g. 2BASE-TL) and the PMD type (e.g. 1000BASE-PX20-U) are classifications of the signal on the line, and do not imply a temperature range or physical format.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 665 of 717

Table 67A–1—Informative deployment examples

Head end (nearer the center of the network)	Customer premises (nearer the periphery of the network)
Weather-protected	**Not weather-protected or weather-protected**
100BASE-LX10	100BASE-LX10
100BASE-BX10-D	100BASE-BX10-U
1000BASE-LX10	1000BASE-LX10
1000BASE-BX10-D	1000BASE-BX10-U
1000BASE-PX10-D	1000BASE-PX10-U
1000BASE-PX20-D	1000BASE-PX20-U
10PASS-TS-O	10PASS-TS-R
2BASE-TL-O	2BASE-TL-R

67A.2 Temperature

Large portions of Ethernet Subscriber Access optical and copper links are expected to operate in environmental conditions consistent with the outside plant. However, it is recognized that the exact requirements for a particular deployment will vary greatly depending on the geographic location, system structure, and governing regulations. It is also recognized that portions of the network may be deployed in more benign and protected environments and that in some geographic location the outside environment may also be considered benign.

There are many factors. The temperatures in coastal regions are not usually extreme. Tropical regions are usually hot or hot and wet. The widest temperature swings are found in dry regions in the interior of large continents, e.g. central North America or central Asia. High altitude may reduce the efficacy of air cooling systems. To an extent, this is offset by the typically cooler air temperature at high altitude. Direct sunshine can add up to 1120 W/m^2 heating - see Table 1 of ETSI EN 300 019-1-3.

As a reference, Table 67A–2 shows the annual extreme air temperature values for the nine classes of climates from IEC 60721-2-1.

The climate is the basic determining factor in the component temperature. However, the temperature of the equipment using the component is significantly modified by a number of factors related to the location of the equipment. Some of these are:

— Is the equipment location weather-protected or non-weather-protected
— Is the building temperature controlled
— Are locations without temperature control subject to solar heating

Equipment temperatures for a number of locations from ETSI and Telcordia documents are shown in Table 67A–3.

An additional factor is the internal thermal design of the equipment using the optical component. The component temperature will be higher than the equipment ambient and the increase will be implementation dependant. For equipment with the complexity of EFM systems an internal temperature rise of 15ºC to 20ºC may be anticipated.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 666 of 717

Table 67A–2—Informative listing of climate types

Type of climate	Low temperature (°C)	High temperature (°C)
Extremely cold (except the Central Antarctic)	–65	+32
Cold	–50	+32
Cold temperate	–33	+34
Warm temperate	–20	+35
Warm dry	–20	+40
Mild warm dry	–5	+40
Extremely warm dry	+3	+55
Warm damp	+5	+40
Warm damp, equable	+13	+35

Table 67A–3—Informative listing of equipment temperature ranges

Climate or location	Specified ambient temperature	Reference
Weather-protected		
Telecom control rooms	15 – 30°C	ETSI Class 3.6
Temperature controlled	5 – 40°C (–5 – 45°C with cooling failure)	ETSI Class 3.1
Controlled - long term	5 – 40°C (–5 – 50°C short term)	Telcordia GR-63
Partly temperature-controlled	–5 – 45°C	ETSI Class 3.2
Not temperature-controlled	–25 – 55°C	ETSI Class 3.3
Sheltered locations	–40 – 40°C	ETSI Class 3.5
Extended/uncontrolled	–40 – 46°C (-40 to 65°C inside enclosure)	Telcordia GR-487, GR-468
Sites with heat trap	–40 – 70°C	ETSI Class 3.4
Non-weather-protected		
Temperate	–33 – 40°C	ETSI Class 4.1
Extended	–45 – 45°C	ETSI Class 4.1E
Extremely cold	–65 – 35°C	ETSI Class 4.2L
Extremely warm dry	–20 – 55°C	ETSI Class 4.2H

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 667 of 717

67A.3 Temperature impact on optical components

Components are often commercially available in two grades, 0 to 70°C and –40 to 85°C, although optoelectronic components are also available in –20 or –10 to 85°C grade, depending on format. The GBIC MSA requires an operating temperature range of 0 to 50°C in moving air. Because of the varied physical format of equipment and components, the reader is advised to refer to specific product literature or multi source agreements for precise information.

The most temperature sensitive sub-component in an Ethernet terminal is expected to be the semiconductor laser, if for a fiber optic link. There are two categories of laser presently commonplace in the physical layers addressed here; Fabry-Perot (FP), a type of multi longitudinal mode (MLM) laser, and distributed feedback (DFB), a type of single longitudinal mode (SLM) laser.

Fabry-Perot lasers may have a temperature coefficient of wavelength around 0.45 nm/K, so the operating wavelength of a particular FP may vary by 55 nm over the range –40 to 85°C. The operating wavelength windows within this standard are generally 100 nm wide where FPs are anticipated, allowing adequate margin for manufacturing tolerances. To allow for the widest variety of implementation the spectral width is specified as a function of wavelength where appropriate. However, the requirement for low error rates over substantial distances of fiber, as specified by transmitter and dispersion penalty (TDP), forces the implementer of 1000 Mb/s FP laser based implementations to pay careful attention to both wavelength and spectral width to avoid excessive mode partition noise. In practice, the full range of wavelengths in the standard is not actually available for use because at the temperature extremes the required spectral width would be too narrow. It can be seen that the wider the temperature range required, the more precisely the wavelength and spectral width must be contained to achieve a particular reach. This may have an impact on cost. This consideration would be expected to apply to 1000BASE-LX10, 1000BASE-BX10-U and 1000BASE-PX10-U.

Where the dispersion of the link or the wavelength limits are more demanding than can be met cost-effectively with FPs, DFBs may be used. They may have a temperature coefficient of wavelength under 0.1 nm/K and much narrower spectral widths than FPs. Because only a single longitudinal mode is present, a DFB does not suffer from mode partition noise. DFBs are generally more expensive than FPs. A DFB's lasing wavelength varies at 0.1 nm/K while its gain peak varies at around 0.45 nm/K. At extremes of temperature these two wavelengths are far apart and the laser may perform poorly. For this reason, DFBs for extended temperature range may be more expensive again. This consideration would be expected to apply to 1000BASE-BX10-D, 1000BASE-PX10-D and 1000BASE-PX20.

67A.3.1 Component case temperature recommendations

67A.2 discussed the temperature progression from climate to equipment to component. 67A.3 discussed the impact of temperature, and particularly temperature range, on the design and cost of laser based optical components. In order to balance these two effects, contain costs, and yet cover the widest range of climates to allow access to the greatest markets the following recommendations are made.

Two component case temperature ranges, and by inference a third, are developed. These are defined as follows:

— Warm Extended: Intended for outdoor application in warmer climate locations.
— Cool Extended: Intended for outdoor applications in cooler climate locations.
— Universal Extended: (This is not a separate class, but is defined by simultaneously complying with the Warm and Cool Extended temperature ranges) This is a combination of the requirements for the Warm Extended and Cool Extended Classes and is intended for general outdoor applications in areas with wide seasonal variations or those designs intended for deployment in multiple geographic locations.

Copyright © 2004 IEEE. All rights reserved.
DirecTV Exhibit 1010, Page 668 of 717

The recommended component case temperature ranges for these two classes are shown in Table 67A–4.

Table 67A–4—Component case temperature class recommendations

Class	Low temperature (°C)	High temperature (°C)
Warm extended	–5	+85
Cool extended	–40	+60
Universal extended	–40	+85

It will be noted that the recommendations of Table 67A–4 do not address the extremely cold climates of Table 67A–2 or the cold non-weather-protected equipment requirements of Table 67A–3. In these geographic locations it is common practice to avoid non-weather-protected locations for systems of EFM complexity and place the equipment indoors.

These temperature ranges are optional and conformance with these ranges is not required. This allows lower cost components to be had for those applications that require less extreme temperature ranges. This may be done by taking advantage of the reduced wavelength change to ease the central wavelength tolerance and spectral width requirements from the trade-off curves and more particularly, the TDP limit. This allows equipment and component suppliers, at their discretion, to develop systems and components that tolerate less severe environmental conditions that they view as suitable for their market as long as the PMD is consistent with the PICS proforma of the relevant clause. This limitation assures interoperability while allowing the equipment to be developed for specific markets. It is to be noted that the PMD specifications included in the optics Clause 58, Clause 59, and Clause 60 are based on a temperature range of –40 to 85°C in terms of the wavelength ranges and spectral widths defined.

Copyright © 2004 IEEE. All rights reserved.

DirecTV Exhibit 1010, Page 669 of 717

Appendix IEEE02

screenshot-onesearch.library.nd.edu-2024.02.05-19_02_07
https://onesearch.library.nd.edu/primo-explore/sourceRecord?vid=NDU&docId=ndu_aleph002248393
05.02.2024

```
Leader 00000nai a2200685Ia 4500
005    20170810094233.0
006    m        d
007    cr unu   uuuuu
008    051027c20009999nyuuu d s     0    2eng d
035    ##$a(OCoLC)62163828
040    ##$aWAU$cWAU$dIND
049    ##$aINDU
090    ##$aTK275$b.I33
110    2#$aIEEE Standards Association.
245    10$a[IEEE standards]$h[electronic resource].
246    3#$aIEEE standards
260    ##$a[New York, N.Y.] :$bIEEE :$bIEEE Xplore
362    1#$aBegan in 2000?
500    ##$aTitle supplied by cataloguer (IEEE Xplore, viewed Oct. 27, 2005).
506    ##$aAvailable to subscribers only.
520    ##$aContains searchable documents authored by the IEEE Standards Association, as well as standards developed in conjunction with or dually approved
538    ##$aSystem requirements: Adobe Reader.
538    ##$aMode of access: World Wide Web.
592    11$aThe Dorene and Jerry Hammes Library Endowment for Critical Technologies in Engineering Dedicated to Rev. Theodore Hesburgh.
592    11$aThe Leo and Verna Wahl Library Endowment in Engineering.
592    11$aThe Carl and Louise Pettersch Library Endowment in Critical Technologies.
592    11$aThe Richard and Angela Wolohan Family Endowment for Engineering.
592    11$aThe Chicago Rivet Foundation.
592    11$aThe Chicago Rivet Foundation Library Collection in Engineering in Memory of John A. Morrissey.
599    99$anew$d20061212
599    99$aauth$d20090728
650    #0$aElectrical engineering$xStandards.
650    #0$aTechnology$xStandards.
650    #0$aElectronics$xStandards.
650    #0$aTelecommunication$xStandards.
650    #0$aInformation technology$xStandards.
710    2#$aInstitute of Electrical and Electronics Engineers.
710    2#$aAmerican National Standards Institute.
710    2#$aIEEE Xplore (Online service)
740    02$aIEEE standards.
740    02$aANSI/IEEE standards.
740    02$aANSI standards.
740    02$aIEEE draft standards.
856    40$uhttps://eresources.library.nd.edu/databases/ieeestandards$yNotre Dame Online Access
994    ##$aC0$bIND
AUT    ##$aInstitute of Electrical and Electronics Engineers.$bStandards Association
AUT    ##$aIEEE-SA
AUT    ##$aAmerican National Standards Institute
AUT    ##$aANSI (American National Standards Institute)
AUT    ##$aA.N.S.I. (American National Standards Institute)
AUT    ##$aIgud mehandese ḥashmal ve-elektronikah
AUT    ##$aInstitute of Electrical and Electronic Engineers
AUT    ##$aInstitute of Electrical & Electronics Engineers
AUT    ##$aInstitute of Electronics Engineers (U.S.)
AUT    ##$aIEEE
AUT    ##$aI.E.E.E.
AUT    ##$aInstitute of Electronical and Electronics Engineers
AUT    ##$aIEEE Explore (Online service)
FMT    SE
LDR         nai a2200685Ia 4500
SUB    ##$aElectric engineering$xStandards
SUL    ##$aElectric engineering$xStandards
TYP    ##$aElectronic Resource
TYP    ##$aBook
TYP    ##$aSerial
TYP    ##$aIntegrating
TYP    ##$aElectronic Journal
XYZ    ##$aScience, Applied
XYZ    ##$aApplied science
XYZ    ##$aTelecommunications
XYZ    ##$aElectric communication
XYZ    ##$aTelecom
XYZ    ##$aTelecommunication industry
XYZ    ##$aIT (Information technology)
XYZ    ##$aElectric engineering
```


DirecTV Exhibit 1010, Page 671 of 717

https://onesearch.library.nd.edu/primo-explore/fulldisplay?docid=ndu_aleph002248393&vid=NDU&search_scope=nd_campus&tab=nd_campus&lang=en_US&context=L 2024-02-05T18:59:21-05:00

There may be delays in processing Interlibrary Loan requests due to technical difficulties.

DATABASE

[IEEE standards]

IEEE Standards Association., Institute of Electrical and Electronics Engineers., American National Standards Institute., IEEE Xplore [Online service]
New York, N.Y. : IEEE : IEEE Xplore, 2000

Export

EXPORT BIBTEX | EXPORT RIS | REFWORKS | MENDELEY | ENDNOTE | EASYBIB | CITATION | PERMALINK | PRINT | E-MAIL

Online Access

Notre Dame Online Access

Details

Title	[IEEE standards]
Author	IEEE Standards Association.
Contributor	Institute of Electrical and Electronics Engineers. American National Standards Institute. IEEE Xplore [Online service]
Published	New York, N.Y. : IEEE : IEEE Xplore 2000 Began in 2000?
Language	English
Rights	Available to subscribers only.
Description	Contains searchable documents authored by the IEEE Standards Association, as well as standards developed in conjunction with or dually approved by other standards organizations. Includes ANSI/IEEE standards, ANSI standards, and AIEE standards. Also includes IEEE draft standards.
Contents	AIEE standards. ANSI/IEEE standards. ANSI standards. IEEE draft standards.
General Notes	Title supplied by cataloguer (IEEE Xplore, viewed Oct. 27, 2005). **Technical Details:** System requirements: Adobe Reader. **Technical Details:** Mode of access: World Wide Web. **Made Available by:** The Dorene and Jerry Hammes Library Endowment for Critical Technologies in Engineering Dedicated to Rev. Theodore Hesburgh. **Made Available by:** The Leo and Verna Wahl Library Endowment in Engineering. **Made Available by:** The Carl and Louise Pettersch Library Endowment in Critical Technologies. **Made Available by:** The Richard and Angela Wolohan Family Endowment for Engineering. **Made Available by:** The Chicago Rivet Foundation. **Made Available by:** The Chicago Rivet Foundation Library Collection in Engineering in Memory of John A. Morrissey.


Subjects	Electrical engineering -- Standards › Technology -- Standards › Electronics -- Standards › Telecommunication -- Standards › Information technology -- Standards ›
Variant Title	IEEE standards
Identifier	OCLC : 62163828
Record ID	002248393 (Notre Dame Catalog Classic)
Type	Database

Report a problem with this record ›

More Links

Notre Dame Catalog [electronic resource]. ›
This item in WorldCat ›
This item in Google Books ›
Staff MARC View ›

Virtual Shelf

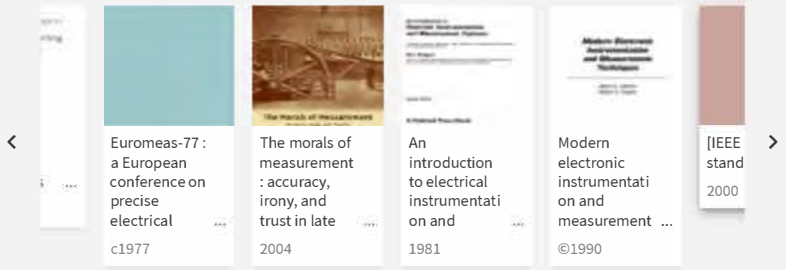

Euromeas-77 : a European conference on precise electrical
c1977

The morals of measurement : accuracy, irony, and trust in late
2004

An introduction to electrical instrumentati on and
1981

Modern electronic instrumentati on and measurement ...
©1990

[IEEE stand
2000

Appendix IEEE03

https://web.archive.org/web/20040701000000*/http://standards.ieee.org/db/status/status.txt 2024-02-05T19:10:57-05:00

INTERNET ARCHIVE

SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE

INTERNET ARCHIVE WayBackMachine


Explore more than 866 billion web pages saved over time

http://standards.ieee.org/db/status/status.txt

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **67 times** between May 29, 1997 and January 3, 2023.

1996 1997 1998 1999 2000 2001 2002 2003 **2004** 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014

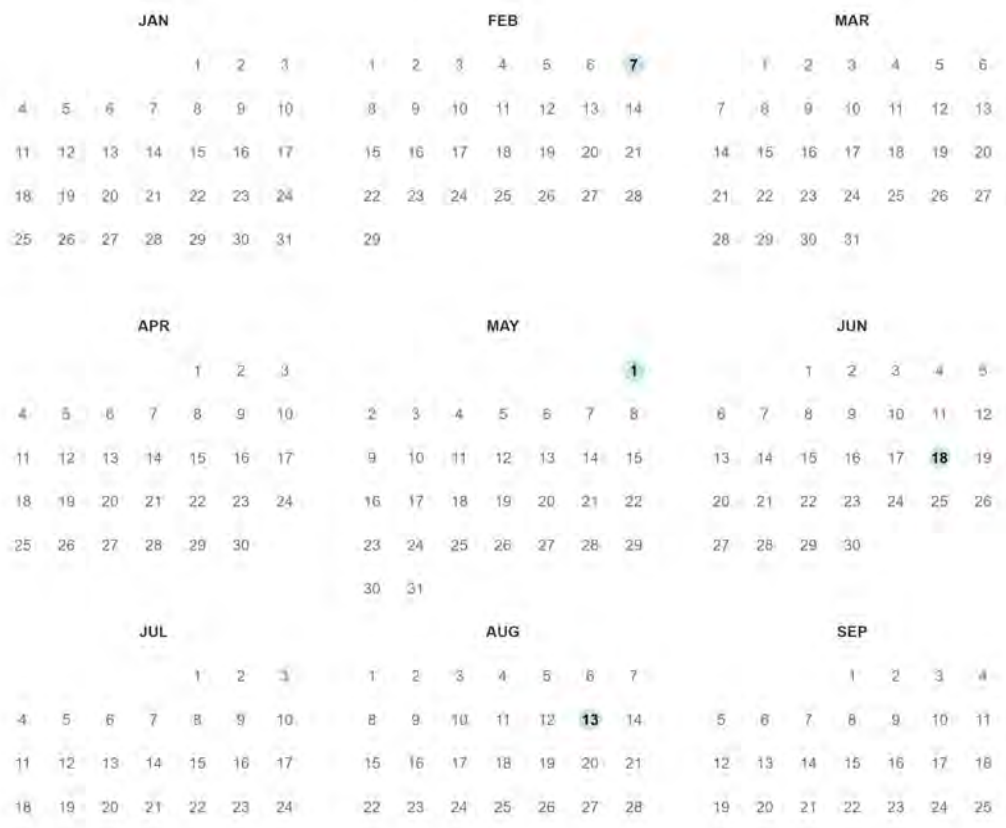

Note

This calendar view maps the number of times **http://standards.ieee.org/db/status/status.txt** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)



The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

screenshot-web.archive.org-2024.02.05-19_09_30
https://web.archive.org/web/20040813211757/http://standards.ieee.org:80/db/status/status.txt
05.02.2024



Products and Projects Status Report Thu Aug 12 10:57:31 EDT 2004

Title: IEEE Standards Stationary Battery Collection - 1993 Edition
Status: Approved Publication of IEEE
Publication type: Collection
Abstract: Because stationary batteries play such a vital role of providing reliable backup and emergency power, their design, installation and maintenance must be reliable and sound. The best way to make sound design decisions and to maximize service expected from an installed battery system is to comply with the most current standards used throughout industry today, IEEE stationary battery standards. Containing 10 standards, this collection includes the complete set of lead-acid and nickel-cadmium battery standards used in the planning, design and maintenance of today's battery installations.

Title: IEEE Standards Operations Manual
Status: Superseded
Publication type: Special Publication

Title: Electric Machinery Collection
Status: Superseded
Publication type: Collection

Title: Fourth Interim Collection of the National Electrical Safety Code®
Interpretations, 1991-1993

screenshot-web.archive.org-2024.02.05-19_09_30
https://web.archive.org/web/20040813211757/http://standards.ieee.org:80/db/status/status.txt
05.02.2024



characterized by low power requirements and LAN connectivity.

Designation: 802.3ah-2004
Sponsor: Computer Society/Local and Metropolitan Area Networks
Title: Amendment to Standard [for] Information Technology - Telecommunications and Information Exchange Between Systems - Local and Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access With Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications - Media Access Control Parameters, Physical Layers and Management Parameters for Subscriber Access Networks
Status: Approved Publication of IEEE
Technical Contact: Howard M Frazier, Phone:925-461-9709, Email:<A HREF="mailto:millardo@dominetsystems.com">millardo@dominetsystems.com</A>
**For non-technical questions, including pricing, availability and ordering, please contact IEEE Customer Service at 1-800-678-IEEE (in U.S.and Canada); or 1-732-981-0060 (outside the U.S. and Canada); or send an email <A HREF="mailto:customer.service@ieee.org">customer.service@ieee.org</A>
History: PAR APP: Sep 27, 2001, BD APP: Jun 24, 2004
Project Scope: Define 802.3 Media Access Control (MAC) parameters and minimal augmentation of the MAC operation, physical layer specifications, and management parameters for the transfer of 802.3 format frames in subscriber access networks at operating speeds within the scope of the current IEEE Std 802.3 and approved new projects.
Project Purpose: To expand the application of Ethernet to include subscriber access networks in order to provide a significant increase in performance while minimizing equipment, operation, and maintenance costs.

Appendix IEEE04

http://web.archive.org/web/20041001000000*/http://standards.ieee.org/catalog/sol/index.html 2024-02-05T19:13:33-05:00

INTERNET ARCHIVE

SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE


INTERNET ARCHIVE WayBackMachine

Explore more than 866 billion web pages saved over time

http://standards.ieee.org/catalog/sol/index.html

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **58 times** between April 20, 1999 and November 9, 2022.

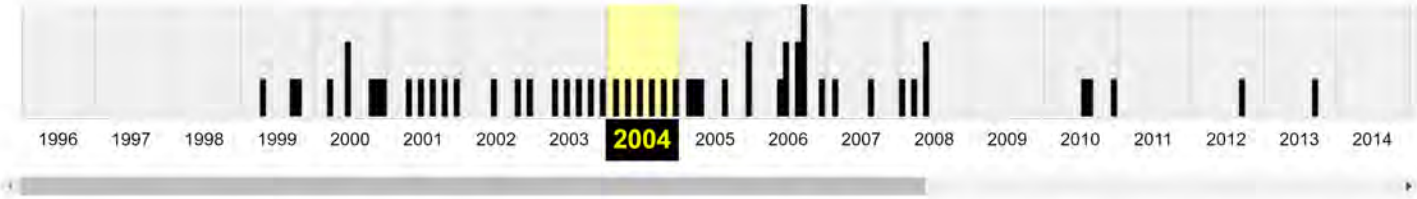

JAN

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

FEB

1	2	3	4	5	6	7
8	9	10	11	12	13	**14**
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29						

MAR

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

APR

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	

MAY

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

JUN

		1	2	3	**4**	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30			

JUL

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

AUG

1	2	3	4	5	6	7
8	9	10	11	**12**	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

SEP

			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30		

OCT

				1	2	
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	**25**	26	27	28	29	30

NOV

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30				

DEC

			1	2	3	**4**
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

Note

This calendar view maps the number of times **http://standards.ieee.org/catalog/sol/index.html** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)



The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

http://web.archive.org/web/20041025023829/http://standards.ieee.org/catalog/sol/index.html 2024-02-05T19:13:07-05:00

http://standards.ieee.org/catalog/sol/index.html Go AUG OCT DEC
58 captures
20 Apr 1999 - 9 Nov 2022
2003 25 2004 2005 About this capture

Products/Services
Catalog
Standards Development
Solutions
More...

IEEE Standards On-Line

Membership
Join IEEE-SA

Registration/Certification
OUI
Ethertype
POSIX
ITS Data Registry

Standards Development
Working Groups and Committees
Patents Database
Balloting
Policies and Procedures

About IEEE-SA
Board of Governors
Standards Board

Newsroom

FAQs

Web Delivery of Individual IEEE Standards

Welcome! IEEE standards are available for download via the Web. Prior to making an individual standard purchase, the IEEE encourages you to review the benefits of the online subscription program.

- How the Service Works
- Software Requirements
- Terms of Use
- How to Order
- IEEE Customer Service Information
- Zip/Unzip (Compression/ Decompression) Information
- Online Demo
- Purchase Considerations
- FAQ
- Comments? Questions?

How the Service Works

When your prepaid order is received, IEEE will quickly e-mail you the URL you need, to access the standard(s) you purchased. When you click on the URL, the delivery process will start. The standard(s) which you have ordered will download in the zip format you select. You can unzip them using decompression tools available to you. That is all it takes for you to download and open the standards you need.

Software Requirements

The web delivery service requires the following:

- Internet connection
- Web browser (Netscape Navigator 2.02 or higher, Internet Explorer 3.0 or higher)
- PDF Reader (Adobe Acrobat Reader 3.0 or higher)
- E-mail
- Decompression (unzipping) tools

Terms of Use

Important! Please read the **Terms of Use** which accompany the use of this service.

How to Order

- **Over the Phone:**
  Call IEEE Customer Service
  Phone: +1 800 701 4333 (within the US and Canada) or +1 732 981 0060 (worldwide)

  Know the product number and have your email address handy.

- **By Fax/Mail:**
  Print the **Online Order Form** (pdf format), complete the information requested and fax/mail completed form to:

  IEEE Customer Service
  445 Hoes Lane
  PO Box.1331
  Piscataway NJ 08855-1331

USA
Fax: +1 732 981.9667
E-mail: e-products@ieee.org

- **Online:**
  Place your order at the **IEEE Online Catalog & Store.** Enter product number or standard number in the field and add selected standard(s) to shopping cart.

IEEE Customer Service Information

IEEE Customer Service
445 Hoes Lane
PO Box 1331
Piscataway NJ 08855-1331
USA
Phone: +1 800 678 4333 (within the US and Canada)
Phone: +1 732 981 0060 (outside the US and Canada)
Fax: +1 732 981 9667
E-mail: e-product@ieee.org

Orders for the individual IEEE standards via the Web are processed only during normal IEEE business operating hours *(Mon-Fri; 8:30 am to 5:00 pm EST)*.

Zip/Unzip (Compression/Decompression) Information

We use standard zipping (compression) techniques to minimize the size of the documents you download, so your download time is reduced. Please click on **Zip Information** for detailed information and sources on compression techniques and shareware/freeware zip tools.

Online Demo of the Download Service

Want to experience Web Delivery of IEEE Standards? Click the **Online Demo** to get a ***real*** feel for our download service. Click "Yes" to the Record Check, click "Accept" to accept the Terms of Use, and choose the zip format suitable for your system. You will be able to download IEEE Standard 2001-1999 ***at no charge***, in pdf format.

Purchase Considerations

Prior to making a purchase of an individual standard, we encourage you to review the benefits of an online subscription.

- Your IEEE standards will be packaged according to topical category
- You are granted repeated access to IEEE standards 365 days a year, 24X7.
- You incur no additional cost throughout the year as new standards are added to your subscription
- You receive automatic e-mail updates when new standards are added to your subscription
- You benefit from generous price discounts when compared to purchasing the subscriptions standards separately

You can review the Standards Online here: **Subscription Portfolio.**

Copyright © 2001-2003 IEEE

(olis-query@ieee.org)
URL: http://standards.ieee.org/catalog/sol/index.html
(Modified: 04 March 03)

Appendix IEEE05

http://web.archive.org/web/20040515000000*/http://standards.ieee.org/catalog/olis/product_tip.html 2024-02-05T19:15:52-05:00

INTERNET ARCHIVE

SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE

INTERNET ARCHIVE WayBackMachine

Explore more than 866 billion web pages saved over time

http://standards.ieee.org/catalog/olis/product_tip.html

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **28 times** between November 6, 2001 and November 9, 2022.

1996 1997 1998 1999 2000 2001 2002 2003 **2004** 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014

JAN

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

FEB

1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	**26**	27	28
29						

MAR

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

APR

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	**22**	23	24
25	26	27	28	29	30	

MAY

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

JUN

		1	2	3	**4**	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30			

JUL

			1	2	3	
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

AUG

1	2	**3**	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

SEP

			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30		

OCT

				1	2	
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	**27**	28	29	30

NOV

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30				

DEC

			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

Note

This calendar view maps the number of times **http://standards.ieee.org/catalog/olis/product_tip.html** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)

The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

http://web.archive.org/web/20041027191942/http://standards.ieee.org/catalog/olis/product_tip.html 2024-02-05T19:15:35-05:00

http://standards.ieee.org/catalog/olis/product_tip.html Go AUG OCT FEB

28 captures 6 Nov 2001 - 9 Nov 2022

2003 27 2004 2005 About this capture

IEEE Standards Online
Product Tip

"Get IEEE 802™" or an IEEE Standards Online Subscription: What's the Difference?

In deciding which IEEE 802® program will meet your needs, we have prepared an overview of how the IEEE Standards Online subscription to 802 LAN/MAN+Drafts compares with the "Get IEEE 802" program, which makes select IEEE 802 standards available at no cost via the Web.

New IEEE 802 standards are consistently being developed. The "Get IEEE 802" program makes select standards available at no cost; however, the online subscription offers unique features and benefits, as enumerated in the table below.

FEATURES & BENEFITS COMPARISON	IEEE 802® (LAN/MAN +Drafts) Subscription	Get IEEE 802™ Program
Access to standards as soon as they become available	**YES!**	NO (6-month delay until their no-cost availability)
Access to draft IEEE 802 standards	**YES!**	NO
Access to archived IEEE 802 standards *(those that have been superseded and/or withdrawn)*	**YES!**	NO
All IEEE 802 standards (draft, active, and withdrawn) located in one central place	**YES!**	NO
IEEE Standards Online e-mail alerts vis-a-vis new IEEE 802 standards becoming available	**YES!**	NO
IEEE Standards Online e-mail newsletter about how IEEE 802 standards are being applied in the marketplace	**YES!**	NO

For more information about the IEEE 802 online subscription click here.

If you have additional questions, feel free to contact us at olis-query@ieee.org.

Appendix OVADIA01

MARC View

LEADER 02053cam a2200421Ia 4500				
001 4580662				
003 SIRSI				
005 20151215100202.0				
006 m d				
007 cr cnu---uuuuu				
008 071105t20072007waua sb 101 0 eng d				
019			a| MARS	
020			a| 9780819469366	
020			a| 081946936X	
035			a| (OCoLC)180702624	
040			a| NHM c| NHM d| SPIED d| CUS d| UtOrBLW	
049			a| UPMM	
245	0	0	a| Broadband access communication technologies II h| [electronic resource] : b| 10-11 September 2007, Boston, Massachusetts, USA / c| Raj Jain [and others], editors ; sponsored and published by SPIE.	
264		1	a| Bellingham, Wash. : b| SPIE, c| [2007]	
264		4	c| ©2007	
300			a| 1 volume (various pagings) : b| illustrations (some color) ; c| 28 cm.	
336			a| text b| txt 2| rdacontent	
337			a| computer b| c 2| rdamedia	
338			a| online resource b| cr 2| rdacarrier	
490	1		a| Proceedings of SPIE, x| 0277-786X ; v| 6776	
504			a| Includes bibliographical references and author index.	
530			a| Also available in print.	
650		0	a| Broadband communication systems v| Congresses.	
650		0	a| Data transmission systems x| Technological innovations v| Congresses.	
700	1		a| Jain, Raj.	
710	2		a| Society of Photo-optical Instrumentation Engineers.	
730	0		a| SPIE digital library.	
776	0	8	i| Print version: t| Broadband access communication technologies II. d| Bellingham, Wash. : SPIE, c2007 z| 9780819469366 w| (OCoLC)177038579	
830		0	a| Proceedings of SPIE--the International Society for Optical Engineering ; v| v. 6776.	
856	4	0	u| https://ezaccess.libraries.psu.edu/login?url=http://link.spie.org/PSISDG/6776/1	
533			a| Electronic reproduction. b| Bellingham, Wash. : c| SPIE--the International Society for Optical Engineering, d| 2007. n| Mode of access: World Wide Web. n| Access restricted to SPIE Digital Library subscribers.	
590			a| AVAILABLE ONLINE TO AUTHORIZED PSU USERS.	
949			a| Electronic resource w| ASIS c| 1 i| 4580662-1001 l| ONLINE m| ONLINE r| Y s| Y t| ONLINE u| 7/11/2008 o| .STAFF. SPIE 20080529	

ASK A LIBRARIAN

PennState

Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.

Legal Statements | PSU Hotlines

PENN STATE UNIVERSITY LIBRARIES

Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory

Broadband access communication technologies II [electronic resource] : 10-11 September 2007, Boston, Massachusetts, USA / Raj Jain [and others], editors ; sponsored and published by SPIE

Published:	Bellingham, Wash. : SPIE, [2007]
Copyright Date:	©2007
Physical Description:	1 volume (various pagings) : illustrations (some color) ; 28 cm.
Additional Creators:	Jain, Raj and Society of Photo-optical Instrumentation Engineers

ASK A LIBRARIAN

Access Online

ezaccess.libraries.psu.edu

Series:
Proceedings of SPIE--the International Society for Optical Engineering ; v. 6776

Subject(s):
Broadband communication systems—Congresses
Data transmission systems—Technological innovations—Congresses

ISBN:
9780819469366
081946936X

Related Titles:
SPIE digital library

Note:
AVAILABLE ONLINE TO AUTHORIZED PSU USERS.

Bibliography Note:
Includes bibliographical references and author index.

Other Forms:
Also available in print.

Reproduction Note:
Electronic reproduction. Bellingham, Wash. : SPIE--the International Society for Optical Engineering, 2007. Mode of access: World Wide Web. Access restricted to SPIE Digital Library subscribers.

PennState

Copyright @2019 The Pennsylvania State University. All rights reserved. Except where otherwise noted, this work is subject to a Creative Commons Attribution 4.0 license. Details and exceptions.

Legal Statements | PSU Hotlines

PENN STATE UNIVERSITY LIBRARIES
Libraries Home (814) 865-6368
Libraries Intranet (Staff Only)
Accessibility Help
Website Feedback
Policies and Guidelines
Staff Directory

PROCEEDINGS VOLUME 6776
OPTICS EAST | 9-12 SEPTEMBER 2007

Broadband Access Communication Technologies II

Editor(s): Raj Jain (/profile/Raj.Jain-9828), Benjamin B. Dingel (/profile/Benjamin.Dingel-9935), Shozo Komaki, Shlomo Ovadia (/profile/Shlomo.Ovadia-1973)

Editor Affiliations + ()

Proceedings Volume 6776 is from: Logo (x16338.xml)

OPTICS EAST
9-12 September 2007
Boston, MA, United States

View the SPIE Conference + Exhibitions Calendar (https://spie.org/conferences-and-exhibitions?webSyncID=bd471d4b-3ab6-5600-07c5-b1801c57c161&sessionGUID=a19461b2-1539-8595-0c63-35769d384a66)

IN THIS VOLUME

7 Sessions, 21 Papers, 0 Presentations

Front Matter: Volume 6776 (1)

Advances in Wireless Broadband Access and Sensor Networks (3)

Hybrid Broadband Access and Sensor Network Technologies (3)

Advances and Challenges in FTTX Access (2)

Emerging Broadband Data Transport and Advances in Cable/DSL-based Access Technologies (5)

Broadband Access Devices and Industrial Sensor Networks (1)

Poster Session (6)

DirecTV Exhibit 1010, Page 691 of 717

Subscribe to Digital Library (/subscribe-page)

VIEW ALL ABSTRACTS + ()

FRONT MATTER: VOLUME 6776

Front Matter: Volume 6776 (/conference-proceedings-of-spie/6776/677601/Front-Matter-Volume-6776/10.1117/12.768253.full)

Open Access Paper

Proceedings Volume Broadband Access Communication Technologies II, 677601 (2007) https://doi.org/10.1117/12.768253 (https://doi.org/10.1117/12.768253)

Read Abstract +

ADVANCES IN WIRELESS BROADBAND ACCESS AND SENSOR NETWORKS

R&D on wireless broadband communication systems: new generation ubiquitous mobile network (/conference-proceedings-of-spie/6776/677603/RD-on-wireless-broadband-communication-systems--new-generation-ubiquitous/10.1117/12.726809.full)

Paper

Hiroyo Ogawa (/profile/Hiroyo.Ogawa-12343)

Proceedings Volume Broadband Access Communication Technologies II, 677603 (2007) https://doi.org/10.1117/12.726809 (https://doi.org/10.1117/12.726809)

Read Abstract +

The influence of interference networks in QoS parameters in a WLAN 802.11g: a Bayesian approach (/conference-proceedings-of-spie/6776/677604/The-influence-of-interference-networks-in-QoS-parameters-in-a/10.1117/12.734604.full) Paper

Jasmine P. L. Araújo (/profile/Jasmine.Araujo-83028), *Josiane C. Rodrigues*, *Simone G. C. Fraiha*, *Hermínio S. Gomes*, *Jacklyn Reis (/profile/Jacklyn.Reis-9694)*, *Nandamudi L. Vijaykumar*, *Gervásio P. S. Cavalcante*, *Carlos R. L. Francês*

Proceedings Volume Broadband Access Communication Technologies II, 677604 (2007) https://doi.org/10.1117/12.734604 (https://doi.org/10.1117/12.734604)

Read Abstract +

On optimal contention-based access scheme in WLAN for next generation networks (/conference-proceedings-of-spie/6776/677605/On-optimal-contention-based-access-scheme-in-WLAN-for-next/10.1117/12.752565.full) Paper

Hsi-Hsun Yeh (/profile/Hsi-Hsun.Yeh-58850), *Chih-Chuan Cheng (/profile/Chih-Chuan.Cheng-30331)*, *Mau-Shi Chen*, *Bo-Chou Cheng*, *Huan Chen (/profile/Huan.Chen-42570)*

Proceedings Volume Broadband Access Communication Technologies II, 677605 (2007) https://doi.org/10.1117/12.752565 (https://doi.org/10.1117/12.752565)

Read Abstract +

HYBRID BROADBAND ACCESS AND SENSOR NETWORK TECHNOLOGIES

Development project of radio on free space optics (/conference-proceedings-of-spie/6776/677606/Development-project-of-radio-on-free-space-optics/10.1117/12.726810.full) Paper

Katsutoshi Tsukamoto (/profile/Katsutoshi.Tsukamoto-13498), *Shozo Komaki*, *Mitsuji Matsumoto (/profile/Mitsuji.Matsumoto-71176)*

Proceedings Volume Broadband Access Communication Technologies II, 677606 (2007) https://doi.org/10.1117/12.726810 (https://doi.org/10.1117/12.726810)

Read Abstract +

A novel fair queuing algorithm for hybrid wired/wireless architecture with wireless compensation to provide end-to-end quality of service support (/conference-proceedings-of-spie/6776/677607/A-novel-fair-queuing-algorithm-for-hybrid-wired-wireless-architecture/10.1117/12.735366.full) Paper

Ajaz Sana (/profile/Ajaz.Sana-75836), *Xin Ye (/profile/Xin.Ye-86852)*, *Shahab Hussain (/profile/Shahab.Hussain-112372)*, *Mohammed A. Ali*, *Samir Ahmed (/profile/Sam.Ahmed-12511)*

Proceedings Volume Broadband Access Communication Technologies II, 677607 (2007) https://doi.org/10.1117/12.735366 (https://doi.org/10.1117/12.735366)

Read Abstract +

DirecTV Exhibit 1010, Page 692 of 717

Generation of arbitrarily shaped pulse for optical wireless communication (/conference-proceedings-of-spie/6776/677608/Generation-of-arbitrarily-shaped-pulse-for-optical-wireless-communication/10.1117/12.738147.full) Paper
S. You (/profile/Shanhong.You-146126), M. Kavehrad (/profile/Mohsen.Kavehrad-11948)
Proceedings Volume Broadband Access Communication Technologies II, 677608 (2007) https://doi.org/10.1117/12.738147 (https://doi.org/10.1117/12.738147)

Read Abstract +

ADVANCES AND CHALLENGES IN FTTX ACCESS

Let there be light and broadband internet: You will have a happier life, I bet. (/conference-proceedings-of-spie/6776/677609/Let-there-be-light-and-broadband-internet--you-will/10.1117/12.726193.full) Paper
Mohsen Kavehrad (/profile/Mohsen.Kavehrad-11948)
Proceedings Volume Broadband Access Communication Technologies II, 677609 (2007) https://doi.org/10.1117/12.726193 (https://doi.org/10.1117/12.726193)

Read Abstract +

A cost model for broadband access networks: FTTx versus WiMAX (/conference-proceedings-of-spie/6776/67760B/A-cost-model-for-broadband-access-networks--FTTx-versus/10.1117/12.746250.full) Paper
João Paulo Ribeiro Pereira (/profile/Joao-Paulo.Pereira-85411)
Proceedings Volume Broadband Access Communication Technologies II, 67760B (2007) https://doi.org/10.1117/12.746250 (https://doi.org/10.1117/12.746250)

Read Abstract +

EMERGING BROADBAND DATA TRANSPORT AND ADVANCES IN CABLE/DSL-BASED ACCESS TECHNOLOGIES

MoCA: ubiquitous multimedia networking in the home (/conference-proceedings-of-spie/6776/67760C/MoCA-ubiquitous-multimedia-networking-in-the-home/10.1117/12.726808.full) Paper
Shlomo Ovadia (/profile/Shlomo.Ovadia-1973)
Proceedings Volume Broadband Access Communication Technologies II, 67760C (2007) https://doi.org/10.1117/12.726808 (https://doi.org/10.1117/12.726808)

Read Abstract +

Terahertz technology for space exploration and data communications (/conference-proceedings-of-spie/6776/67760D/Terahertz-technology-for-space-exploration-and-data-communications/10.1117/12.752266.full) Paper
Michael S. Shur (/profile/Michael.Shur-6463)
Proceedings Volume Broadband Access Communication Technologies II, 67760D (2007) https://doi.org/10.1117/12.752266 (https://doi.org/10.1117/12.752266)

Read Abstract +

MDP-based resource allocation for triple-play transmission on xDSL systems (/conference-proceedings-of-spie/6776/67760F/MDP-based-resource-allocation-for-triple-play-transmission-on-xDSL/10.1117/12.750205.full) Paper
Lamartine V. de Souza (/profile/Lamartine.Souza-76288), Glaucio H. S. de Carvalho, Diego L. Cardoso, Solon V. de Carvalho, Carlos R. L. Frances, João C. W. A. Costa (/profile/Joao.Weyl-Costa-4260527), Jaume Rius i Riu
Proceedings Volume Broadband Access Communication Technologies II, 67760F (2007) https://doi.org/10.1117/12.750205 (https://doi.org/10.1117/12.750205)

Read Abstract +

Performance evaluation of IPTV traffic over pDSL (/conference-proceedings-of-spie/6776/67760G/Performance-evaluation-of-IPTV-traffic-over-pDSL/10.1117/12.751924.full) Paper
Diego L. Cardoso (/profile/Diego.Lisboa-Cardoso-84752), Marcelino S. da Silva, Marcos C. Seruffo, Lamartine V. de Souza (/profile/Lamartine.Souza-76288), Carlos R. L. Francês, Jorge A. M. de Souza, João C. W. A Costa (/profile/Joao.Weyl-Costa-4260527)
Proceedings Volume Broadband Access Communication Technologies II, 67760G (2007) https://doi.org/10.1117/12.751924 (https://doi.org/10.1117/12.751924)

Read Abstract +

Enhanced dynamic bandwidth allocation in WDM-PON (/conference-proceedings-of-spie/6776/67760H/Enhanced-dynamic-bandwidth-allocation-in-WDM-PON/10.1117/12.753476.full) Paper
Xin Ye (/profile/Xin.Ye-86852), Ajaz Sana (/profile/Ajaz.Sana-75836), Chadi M. Assi, Mohamed A. Ali
Proceedings Volume Broadband Access Communication Technologies II, 67760H (2007) https://doi.org/10.1117/12.753476 (https://doi.org/10.1117/12.753476)

Read Abstract +

BROADBAND ACCESS DEVICES AND INDUSTRIAL SENSOR NETWORKS

DirecTV Exhibit 1010, Page 693 of 717

Large optical 3D MEMS switches in access networks (/conference-proceedings-of-spie/6776/67760I/Large-optical-3D-MEMS-switches-in-access-networks/10.1117/12.732491.full) Paper
Nicholas Madamopoulos (/profile/Nicholas.Madamopoulos-15951), *Volkan Kaman*, *Shifu Yuan (/profile/ShiFu.Yuan-10385)*, *Olivier Jerphagnon*, *Roger Helkey*, *John E. Bowers*
Proceedings Volume Broadband Access Communication Technologies II, 67760I (2007) https://doi.org/10.1117/12.732491 (https://doi.org/10.1117/12.732491)

Read Abstract +

POSTER SESSION

Secure encapsulation of nonsecure middleware (/conference-proceedings-of-spie/6776/67760J/Secure-encapsulation-of-nonsecure-middleware/10.1117/12.733248.full) Paper
Jian-min Zhao (/profile/Jianmin.Zhao-84751), *Fang-zhou Zhang (/profile/Fangzhou.Zhang-57665)*, *Tian-ge Li (/profile/Tianshu.Li-85942)*
Proceedings Volume Broadband Access Communication Technologies II, 67760J (2007) https://doi.org/10.1117/12.733248 (https://doi.org/10.1117/12.733248)

Read Abstract +

Triple play service under the impact of nonstationary noise in a DSL system: an Amazon approach (/conference-proceedings-of-spie/6776/67760K/Triple-play-service-under-the-impact-of-nonstationary-noise-in/10.1117/12.734756.full) Paper
Lamartine V. de Souza (/profile/Lamartine.Souza-76288), *Diego Cardoso (/profile/Diego.Lisboa-Cardoso-84752)*, *Marcelino Silva*, *Marcos Seruffo*, *Carlos R. L. Francês*, *João C. W. A. Costa (/profile/Joao.Weyl-Costa-4260527)*, *Agostinho L. S. Castro*, *Gervásio Cavalcante*, *Jaume Rius i Riu*
Proceedings Volume Broadband Access Communication Technologies II, 67760K (2007) https://doi.org/10.1117/12.734756 (https://doi.org/10.1117/12.734756)

Read Abstract +

Sequence and spread spectrum time domain reflectometry for transmission line analysis (/conference-proceedings-of-spie/6776/67760L/Sequence-and-spread-spectrum-time-domain-reflectometry-for-transmission-line/10.1117/12.735873.full) Paper
Jacklyn Reis (/profile/Jacklyn.Reis-9694), *Agostinho L. S. Castro*, *João C. W. A. Costa (/profile/Joao.Weyl-Costa-4260527)*, *Jaume R. I. Riu*, *Klas Ericson*
Proceedings Volume Broadband Access Communication Technologies II, 67760L (2007) https://doi.org/10.1117/12.735873 (https://doi.org/10.1117/12.735873)

Read Abstract +

A tutorial on optimization techniques applied to DSM algorithms (/conference-proceedings-of-spie/6776/67760N/A-tutorial-on-optimization-techniques-applied-to-DSM-algorithms/10.1117/12.736398.full) Paper
Darlene Maciel Neves (/profile/Darlene.Neves-83923), *Aldebaro Barreto da Klautau Jr.*, *Marcio Murilo Conte*, *Eduardo Lins de Medeiros*, *Jacklyn Dias Reis*, *Boris Dortschy*
Proceedings Volume Broadband Access Communication Technologies II, 67760N (2007) https://doi.org/10.1117/12.736398 (https://doi.org/10.1117/12.736398)

Read Abstract +

A system-awareness decision classifier to automated MSN forensics (/conference-proceedings-of-spie/6776/67760O/A-system-awareness-decision-classifier-to-automated-MSN-forensics/10.1117/12.752591.full) Paper
Yin-Teshou Tsao Chu (/profile/Yin-Teshou.Tsao-Chu-86703), *Kuo-Pao Fan*, *Ya-Wen Cheng (/profile/Huan.Chen-42570)*, *Po-Kai Tseng (/profile/Po-Kai.Tseng-86691)*
Proceedings Volume Broadband Access Communication Technologies II, 67760O (2007) https://doi.org/10.1117/12.752591 (https://doi.org/10.1117/12.752591)

Read Abstract +

Process scheduling with fuzzy inference models (/conference-proceedings-of-spie/6776/67760P/Process-scheduling-with-fuzzy-inference-models/10.1117/12.734653.full) Paper
Diego L. Cardoso (/profile/Diego.Lisboa-Cardoso-84752), *Ádamo L. Santana (/profile/Adamo.Santana-75828)*, *Carlos R. Francês*, *Jorge A. Souza (/profile/Jorge.Souza-78367)*, *João W. Costa*
Proceedings Volume Broadband Access Communication Technologies II, 67760P (2007) https://doi.org/10.1117/12.734653 (https://doi.org/10.1117/12.734653)

Read Abstract +

DirecTV Exhibit 1010, Page 694 of 717

DirecTV Exhibit 1010, Page 695 of 717

Paper

10 September 2007

MoCA: ubiquitous multimedia networking in the home

Shlomo Ovadia (/profile/Shlomo.Ovadia-1973)

Author Affiliations + ()

Proceedings Volume 6776, Broadband Access Communication Technologies II; (/conference-proceedings-of-spie/6776.toc) 67760C (2007) https://doi.org/10.1117/12.726808 (https://doi.org/10.1117/12.726808)

Event: Optics East, 2007, Boston, MA, United States

ARTICLE CITED BY

Abstract

The Multimedia-over-Coax Alliance (MoCA) standard is rapidly emerging as the de-facto standard in North America for multimedia home networking. This is driven by the desire to have digital content from various sources such as DVRs, audio devices and PCs reliably available anywhere in the home using the in-home existing coaxial cable wiring. The MoCA technology coexists with other services at the home such as cable TV, cable modem, and satellite services. This technology achieves MAC throughputs exceeding 100 Mb/s in 97% of all outlets in the home with no changes to the home coax infrastructure, and with packet error rates less than 10^{-5}, and with an average latency of less than 3.5 milliseconds based on extensive field trial results.

© (2007) COPYRIGHT Society of Photo-Optical Instrumentation Engineers (SPIE). Downloading of the abstract is permitted for personal use only.

Citation Download Citation

Shlomo Ovadia (/profile/Shlomo.Ovadia-1973) "MoCA: ubiquitous multimedia networking in the home", Proc. SPIE 6776, Broadband Access Communication Technologies II, 67760C (10 September 2007); https://doi.org/10.1117/12.726808 (https://doi.org/10.1117/12.726808)

PROCEEDINGS
5 PAGES

DOWNLOAD STARTED

SAVE TO MY LIBRARY

urlId=10.1117%2F12.726808)

GET CITATION

CITATIONS
Cited by 2 patents.
Explore citations on Lens.org (https://www.lens.org/lens/scholar/article/010-326-384-046-596/main)

Advertisement

Advertisement

RIGHTS & PERMISSIONS

Get copyright permission (https://marketplace.copyright.com/rs-ui-web/mp/search/all/10.1117%2f12.726808)

KEYWORDS

Multimedia

Standards development

Home networking

Digital video recorders

Satellites

Data modeling

Modulation

Show All Keywords

RELATED CONTENT

Performance analysis of passive optical network systems based on the... (/conference-proceedings-of-spie/10029/100291L/Performance-analysis-of-passive-optical-network-systems-based-on-the/10.1117/12.2247857.full)
Proceedings of SPIE (November 03 2016)

Research on HFC network broadband access using WLAN technology (/conference-proceedings-of-spie/6784/67843N/Research-on-HFC-network-broadband-access-using-WLAN-technology/10.1117/12.744963.full)
Proceedings of SPIE (November 19 2007)

Design and implementation of the broadband network access system over... (/conference-proceedings-of-spie/7514/75140E/Design-and-implementation-of-the-broadband-network-access-system-over/10.1117/12.843109.full)
Proceedings of SPIE (October 29 2009)

DirecTV Exhibit 1010, Page 697 of 717

A smart broadband satellite system with elastic capacity (/conference-proceedings-of-spie/7651/76512Y/A-smart-broadband-satellite-system-with-elastic-capacity/10.1117/12.855400.full)
Proceedings of SPIE (April 02 2010)

A multichannel, multi-encoding transmission scheme for wireless video streaming (/conference-proceedings-of-spie/6504/65040N/A-multichannel-multi-encoding-transmission-scheme-for-wireless-video-streaming/10.1117/12.706160.full)
Proceedings of SPIE (January 29 2007)

Multimedia application performance on a WiMAX network (/conference-proceedings-of-spie/7253/725309/Multimedia-application-performance-on-a-WiMAX-network/10.1117/12.815557.full)
Proceedings of SPIE (January 19 2009)

The architecture and design of ethernet passive electronic network (/conference-proceedings-of-spie/7137/71373N/The-architecture-and-design-of-ethernet-passive-electronic-network/10.1117/12.802979.full)
Proceedings of SPIE (November 19 2008)

✓ Subscribe to Digital Library (/subscribe-page)

! Receive Erratum Email Alert ()

DirecTV Exhibit 1010, Page 698 of 717

Appendix OVADIA02

PROCEEDINGS OF SPIE

SPIEDigitalLibrary.org/conference-proceedings-of-spie

MoCA: ubiquitous multimedia networking in the home

Shlomo Ovadia

Shlomo Ovadia, "MoCA: ubiquitous multimedia networking in the home," Proc. SPIE 6776, Broadband Access Communication Technologies II, 67760C (10 September 2007); doi: 10.1117/12.726808

SPIE.

Event: Optics East, 2007, Boston, MA, United States

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024 Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

MoCA: Ubiquitous Multimedia Networking in the Home

Shlomo Ovadia
Entropic Communications, Inc., 9276 Scranton Road, Suite 200, San Diego, CA 92121
Tel: (858) 625-3200x267, Fax: (858) 546-2411, E-mail: shlomo.ovadia@entropic.com

ABSTRACT

The Multimedia-over-Coax Alliance (MoCA) standard is rapidly emerging as the de-facto standard in North America for multimedia home networking. This is driven by the desire to have digital content from various sources such as DVRs, audio devices and PCs reliably available anywhere in the home using the in-home existing coaxial cable wiring. The MoCA technology coexists with other services at the home such as cable TV, cable modem, and satellite services. This technology achieves MAC throughputs exceeding 100 Mb/s in 97% of all outlets in the home with no changes to the home coax infrastructure, and with packet error rates less than 10^{-5}, and with an average latency of less than 3.5 milliseconds based on extensive field trial results.

1. INTRODUCTION

The Multimedia-over-Coax Alliance (MoCA) standard is emerging as the de-facto standard in North America for multimedia home networking [1]. It has been adopted and deployed to the mass market initially through the Verizon fiber optic service (FiOS) deployment. The market for multimedia home networking is driven by the desire to have digital multimedia content from various sources such as DVRs, audio devices and PCs reliably available anywhere in the home. While consumers may be willing to accept degraded multimedia content viewed on mobile and handheld devices, visual degradations will not be tolerated for digital entertainment in a home with multimedia consumer devices such as digital TVs, DVRs, STBs, and media center devices. This paper is organized as follows. In section 2, the home usage model and the MoCA channel characteristics are explained. Section 3 provides an overview of the MoCA physical (PHY) layer and media access control (MAC) layer features based on the MoCA MAC/PHY Specification v1.0 for the home networking. The current development of the next-generation MoCA specification is reviewed in section 5. The MoCA field test results are briefly discussed in section 6, and the MoCA certification process is explained in section 7.

2. MoCA USAGE MODEL

Figure 1 shows an example of a home usage model with triple play services (voice, video, and data). The multimedia signal enters the home via an optical termination unit (ONT) or via cable gateway, digital subscriber line (DSL) gateway, or via a satellite dish. The multimedia content is distributed to each room in the home using the in-home coaxial network. The home must support multiple simultaneous HDTV, SDTV, audio, data, voice-over IP, gaming, and other multimedia usages both from the broadcast network and from the in-home DVR or storage devices. Each room and device may be either, or both, a source or sink of multimedia content both to and from multiple simultaneous entertainment devices in the home.

The in-home coaxial network connectivity model must provide a reliable room-to-room, peer-to-peer, full-mesh connectivity among all sources and sinks in the home. In order to support multiple simultaneous HDTV and SDTV multimedia streams, the in-home network is required to have at least 60 Mb/s, and in many cases greater than 100 Mb/s MAC throughput with low packet error rate (PER $\leq 10^{-5}$) and low average latency ($\leq$ 3.5 milliseconds). These network performance requirements must be satisfied when other services are added or when a neighbor or a housemate runs services in the home.

Broadband Access Communication Technologies II, edited by Raj Jain, Benjamin B. Dingel, Shozo Komaki, Shlomo Ovadia
Proc. of SPIE Vol. 6776, 67760C, (2007) · 0277-786X/07/$18 · doi: 10.1117/12.726808

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024
Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

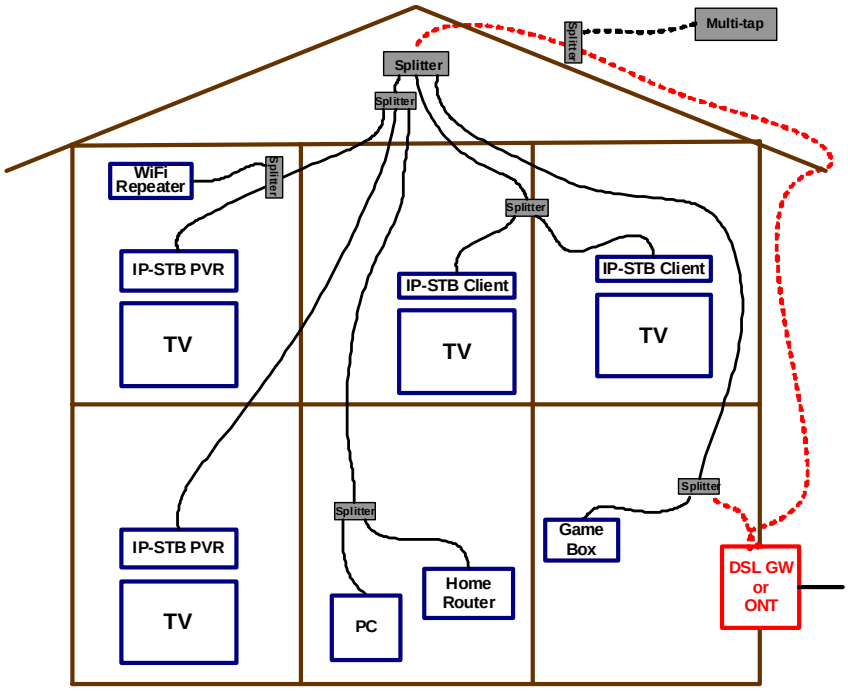


Figure 1: A home usage model using the in-home coaxial network connecting to external networks.

3. MoCA PHY AND MAC LAYER FEATURES

The MoCA technology, which uses the existing in-home coaxial network, is based on the MoCA MAC/PHY Specification v1.0 standard [1]. Although the in-home coax is a relatively static channel, the presence of coaxial splitters creates a highly dispersive multipath channel that can cause significant echoes in addition to high signal attenuation when communicating between various MoCA devices.

3.1 MoCA PHY Layer Features

To overcome multipath degradations and achieve a PER less than or equal to 10^{-5} for large packets (>1500 bytes), the MoCA PHY layer defines a broadband orthogonal frequency division multiplexing (OFDM) signal in a 50 MHz channel where each subcarrier can be independently modulated from BPSK to 256-QAM modulation is defined. Knowledge of the channel at the MoCA receiver enables adaptive bitloading on all the subcarriers at the transmitter. Different probes are used to characterize critical information about the MoCA channel condition. After a probe analysis, modulation profiles are selected to optimize all the point-to-point links while maintaining a low PER. To provide robustness against system impairments, Reed-Solomon forward error correction is applied to all the data packets. All PHY layer transmissions over the coax are achieved using time-division duplexing (TDD) with PHY data rates in a two-node network exceeding 250 Mb/s. The MoCA specification defines MoCA channels at seven MoCA bands located between 875 MHz and 1550 MHz.

3.2 MoCA MAC Layer Features

The MAC layer operation is based on distributed mesh network architecture with time domain multiple access (TDMA) based on a fully scheduled access. The MoCA network supports communications up to 8

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024
Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

nodes. Any MoCA node can become a network coordinator (NC) node, which is automatically selected. Any node in the MoCA network is capable to become the NC node. The NC node broadcasts beacons every 10 milliseconds to enable other MoCA nodes to detect the presence of a network, and join the network. It controls all the transmissions in the network by broadcasting scheduled transmission opportunities to every node in a control packet called a MAP. Every MoCA node must go through an admission process, before becoming part of the MoCA network. Every node gets a reservation opportunity to send a certain number of packets per MAP, which is transmitted by the NC node approximately every one millisecond. For robust network operation, every node in the network periodically updates it's transmit power levels and PHY profiles using the link maintenance operation (LMO). After a new node is admitted to the network, it goes through an LMO. In addition, for seamless network recovery, a node is designated to be the backup NC node, which is communicated to all the nodes so they are aware of which node will take on the role of NC node if the current NC node were to fail. The MoCA network is a secured network, which means that all the transmitted data packets in the MoCA network are encrypted. The NC node generates periodically the link privacy keys and distributes them to all the nodes. The MoCA protocol supports the transport of Ethernet packets across the MoCA network using the Ethernet Convergence Layer. When receiving Ethernet packets from upper layers, the ECL performs the functions of packet encapsulation and forwarding to the destination address of the MoCA nodes.

4. MoCA DEVICE CATEGORIES

MoCA devices are classified into four main categories, intermediate devices, terminal devices, operator-service provider (OSP) devices and non-OSP devices. The primary function of an intermediate device is to bridging of user content between the MoCA network and an external device using an industry standard interface such as Ethernet or USB. In contrast, the primary function of a terminal device is to source or sink user content over the MoCA network. Both intermediate and terminal devices can be either OSP or non-OSP devices. If OSP MoCA network has privacy enabled, then the OSP devices must provide the end-user the means to read the password so that non-OSP devices can be configured by the end-user to join the MoCA network.

5. MoCA SPECIFICATION DEVELOPMENT

The MoCA spec working Group (SWG) is developing the MoCA MAC/PHY Specification standard. The initial MoCA specification v1.0 draft was released in February 2006. The SWG is developing the next-generation of MoCA specifications, which includes the following features:

1. Parameterized quality of service (QoS) to enable guaranteed bandwidth support.
2. Support for 16 node MoCA network
3. Packet aggregation to improve MAC throughput.

Service Providers anticipating the convergence of consumer/retail devices with OSP networks have driven the need for guaranteeing network bandwidth. This is achieved through the use of applications that can take advantage of PQoS features in the Layer 2 protocols. A QoS Manager requests reserved bandwidth for traffic flows from the Layer 2 resource scheduler. If the bandwidth is available, a PQoS flow is set up and the bandwidth, typically reserved for OSP premium content traffic, is guaranteed. PQoS flows can also be updated and torn down.

The MoCA 1.0 specification supports throughputs up to about 135 Mbps on a two-node network using 1518 bytes packets and up to about120 Mbps on a four-node network. The MoCA specification v1.1 draft provides

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024
Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

significantly higher net throughputs through the use of packet aggregation. For example, a two-node MoCA 1.1 network can support up to about 160 Mbps of net throughput.

6. FIELD TEST RESULTS

The purpose of conducting field tests was to validate the performance and coverage of the MoCA technology in real world conditions. Field tests were conducted in about 250 homes in 15 cities across the U.S. All MoCA members including multiple operators and service providers participated in these tests. The tests were conducted under normal living conditions without modifications to the existing cable plant. Existing devices and service were connected to the cable plant. Multiple MoCA nodes were deployed at each home cable outlet, and the tests were coordinated by a laptop with multiple statistics on coverage, performance, and links collected. Figure 2 shows the measured MAC throughput and PHY rates versus the percentage of the in-home paths. Net usable MAC data rates with no changes to the home coax system in 97% of all paths in all homes achieved ≥ 100 Mbps. Furthermore, the net usable MAC data rates with a simple remediation to the installed coax cable system in 100% of the homes achieved ≥ 95 Mbps on every path in the home. The

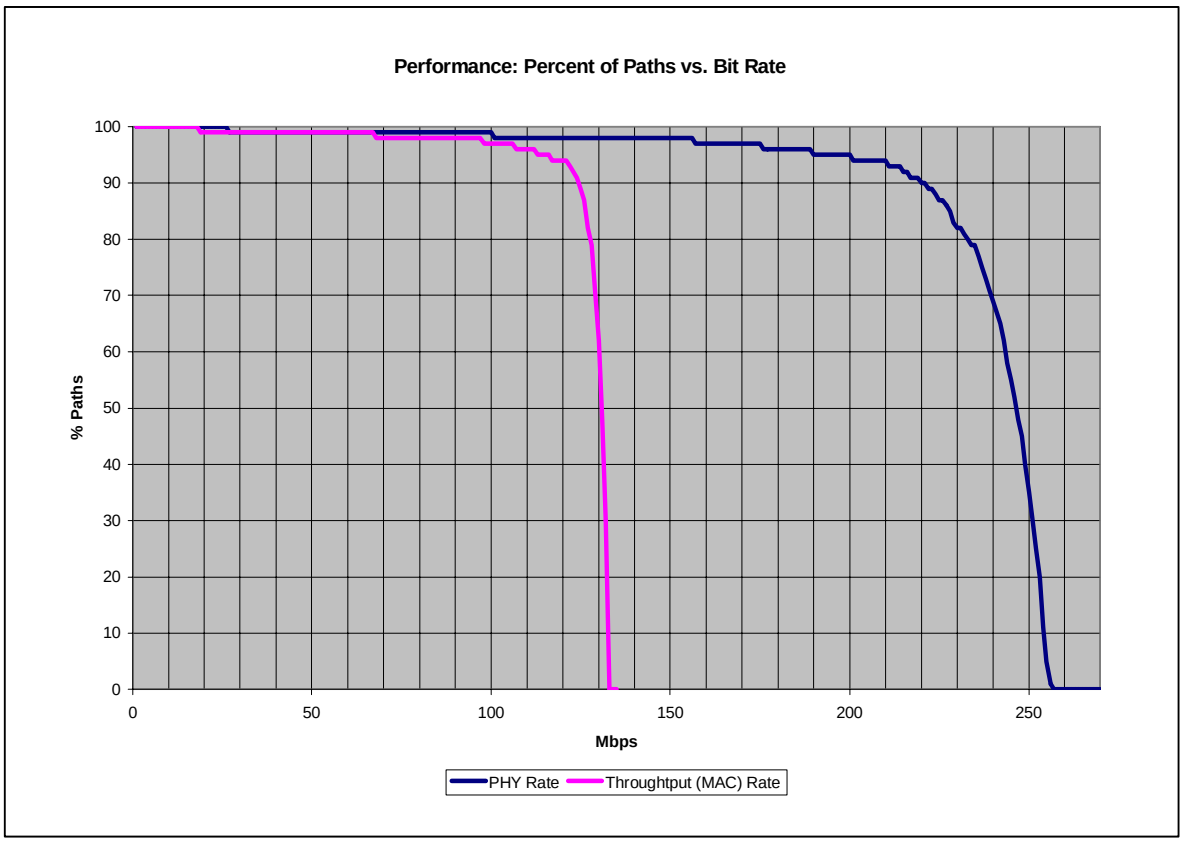


Figure 2: The percentage of paths versus the measured PHY and MAC rates.

measured PER was less than 10^{-5} with an average one-way latency less than 3.5 milliseconds. These field test results provide a real-world validation of MoCA as a robust home networking technology.

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024
Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

7. MoCA CERTIFICATION

The MoCA Certification Working Group (CWG) has developed a certification test plan for both intermediate and terminal devices that covers both OSP and non-OSP devices. To obtain MoCA certification for a product, each vendor must submit the self-test results for the product according to the MoCA test plan to the designated MoCA certification lab before it can start the official certification testing. The submitted product is tested in every MoCA channel that the product is designed to operate. If the submitted product failed one or more of the MoCA certification test cases, then the vendor must take a corrective action and resubmit its product with the self-test results to the designated MoCA certification lab for MoCA certification.

8. CONCLUSIONS

In summary, the MoCA technology was shown to provide a reliable room-to-room, peer-to-peer full mesh connectivity of digital content among MoCA devices using existing in-home coaxial cables. Field test results show MAC throughputs exceeding 100 Mb/s in 97% of all the paths in the home with PER less than 10^{-6} for large packets (> 1500 bytes). Furthermore, the MoCA technology coexists with other services such as cable TV and satellite TV services at the consumer home. The MoCA network is a robust and secured network with multiple layers of redundancy. The Verizon FiOS fiber-to-the-home (FTTH) deployment is based on the use of MoCA technology in the home. This large scale deployment of MoCA technology with more than one million consumers provides a real-world validation of the MoCA technology as a robust home networking technology.

9. REFERENCES

[1] For more details about MoCA see www.mocalliance.org.

[2] MoCA MAC/PHY Specification v1.0 (April 5, 2007).

Downloaded From: https://www.spiedigitallibrary.org/conference-proceedings-of-spie on 06 Feb 2024
Terms of Use: https://www.spiedigitallibrary.org/terms-of-use

Appendix OVADIA03

http://web.archive.org/web/20070501000000*/http://spie.org/x6084.xml 2024-02-09T06:32:00-05:00

INTERNET ARCHIVE

SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE

INTERNET ARCHIVE WayBackMachine

Explore more than 866 billion web pages saved over time

http://spie.org/x6084.xml

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **6 times** between July 15, 2007 and October 18, 2008.

2006 **2007** 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024

JAN

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

FEB

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28			

MAR

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

APR

1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30					

MAY

		1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30	31		

JUN

					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30

JUL

1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

AUG

			1	2	3	4
5	6	7	8	**9**	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

SEP

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

OCT

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	**17**	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

NOV

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	**16**	17
18	19	20	21	22	23	24
25	26	27	28	29	30	

DEC

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29

Note

This calendar view maps the number of times **http://spie.org/x6084.xml** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)



The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

http://web.archive.org/web/20071017044322/http://spie.org/x6084.xml 2024-02-09T06:31:46-05:00

http://spie.org/x6084.xml Go AUG OCT SEP
6 captures
15 Jul 2007 - 18 Oct 2008
2006 17 2007 2008 About this capture

Upcoming Conferences & Exhibitions

Optics East 2007
Event Overview
Program
Conferences
Courses
Special Forums and Events
Schedule
Exhibition Overview
Venue and Travel
Registration

Calls for Papers

Past Conferences & Exhibitions

Information for:
Authors and Presenters
Chairs & Committee Members
Exhibitors, Sponsors, Advertisers

SPIE Optics East

9 - 12 September 2007
Seaport World Trade Center
Boston, MA, USA

Conferences

Attend 26 Conferences covering the latest topics in sensor technologies, fiber optics, nanosensors, and more.

Program Tracks

Communications/ITCom
Sensor Technologies and Applications

Communications/ITCom

6777: Multimedia Systems and Applications X
6773: Next-Generation Communication and Sensor Networks 2007
6779: Nanophotonics for Communication: Materials, Devices, and Systems IV
6776: Broadband Access Communication Technologies II
6780: Quantum Communications Realized
6774: Optical Transmission Systems and Equipment for Networking VI
6778: Three-Dimensional TV, Video, and Display VI
6775: Active and Passive Optical Components for Communications VII

Back to top

Sensor Technologies and Applications

6767: Photonic Crystals and Photonic Crystal Fibers for Sensing Applications III
6764: Intelligent Robots and Computer Vision XXV: Algorithms, Techniques, and Active Vision
6771: Advanced Photon Counting Techniques II
6768: Nanomaterials Synthesis, Interfacing, and Integrating in Devices, Circuits, and Systems II
6761: Optics for Natural Resources, Agriculture, and Foods II
6765: Next-Generation Spectroscopic Technologies
6758: Photonics in the Transportation Industry: Auto to Aerospace
6760: Infrared, Mid-IR, and Terahertz Technologies for Health and the Environment II
6770: Fiber Optic Sensors and Applications V
6755: Advanced Environmental, Chemical, and Biological Sensing Technologies V
6759: Smart Biomedical and Physiological Sensor Technology V
6766: Optoelectronic Devices: Physics, Fabrication, and Application IV
6772: Terahertz Physics, Devices, and Systems II
6763: Wavelet Applications in Industrial Processing V
6769: Nanosensing: Materials, Devices, and Systems III
6757: Sensors for Harsh Environments III
6756: Chemical and Biological Sensors for Industrial and Environmental Monitoring III
6762: Two- and Three-Dimensional Methods for Inspection and Metrology V

Back to top

SPIE © 2007

Appendix OVADIA04

http://web.archive.org/web/20070301000000*/http://spie.org/x1848.xml 2024-02-09T06:33:43-05:00

INTERNET ARCHIVE SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE


INTERNET ARCHIVE WayBackMachine

Explore more than 866 billion web pages saved over time

http://spie.org/x1848.xml

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **138 times** between May 10, 2007 and May 20, 2022.

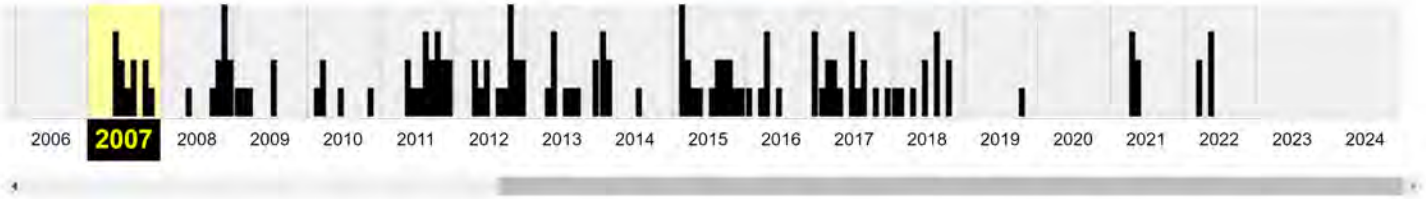

JAN

	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

FEB

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28			

MAR

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

APR

1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30					

MAY

		1	2	3	4	5
6	7	8	9	**10**	11	**12**
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30	31		

JUN

					1	2
3	4	5	6	7	8	9
10	11	12	**13**	14	15	16
17	18	19	20	21	22	23
24	25	**26**	27	28	29	30

JUL

1	2	3	4	5	6	7
8	9	10	11	12	13	**14**
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

AUG

			1	2	3	4
5	6	**7**	8	9	10	11
12	13	14	15	16	17	18
19	20	**21**	22	23	24	25
26	27	28	29	30	31	

SEP

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

OCT

	1	2	3	4	5	6
7	8	9	10	**11**	12	13
14	15	**16**	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31			

NOV

				1	2	3
4	5	6	7	8	9	**10**
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	

DEC

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29

30 31

Note

This calendar view maps the number of times **http://spie.org/x1848.xml** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)

The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

http://web.archive.org/web/20071016042419/http://spie.org/x1848.xml 2024-02-09T06:33:23-05:00

http://spie.org/x1848.xml Go AUG OCT MAY
138 captures 2006 16 2007 2008 About this capture
10 May 2007 - 20 May 2022

SPIE
Connecting minds. Advancing light.

SPIE is an international society advancing an interdisciplinary approach to the science and application of light.

Conference Proceedings

Browse by Conference
Browse by Year
Browse by Volume Number

Research Papers

Journals

Books

Special Collections

Contact SPIE Publications

Information for:
Proceedings Authors

SPIE Conference Proceedings

Original research papers presented at SPIE conferences are available online in the SPIE Digital Library within two to four weeks after the event, with print volumes and CD-ROM collections available a few weeks later. This eFirst publication model gets the author's work out to the community faster, and provides researchers all over the world with immediate access on publication.

Proceedings of SPIE are among the most cited references in the patent literature, and are indexed in numerous online databases including INSPEC, Ei Compendex, Physics Abstracts, Chemical Abstracts, SPIN, International Aerospace Abstracts, ISI Index to Scientific and Technical Proceedings, and the Smithsonian/NASA Astrophysics Data System Abstract Service (ADS).

With 235,000 papers covering 1990 to the present, the SPIE Digital Library is the world's largest collection of research papers in optics and photonics. The more than 18,000 new papers added annually are written by engineers and scientists doing advanced R&D in areas such as micro- and nano-technologies, communications and information technologies, defense and industrial sensing, lasers and electro-optics, biomedical optics, optical system design, and electronic imaging.

In addition to proceedings of SPIE-sponsored conferences, SPIE provides publishing services to other organizations that hold conferences relevant to optics and photonics. Click here for more information about SPIE Contracted Publishing Services.

Use the navigation to the left to search by conference, year, or volume number.

SPIE Digital Library

INNOVATION STARTS HERE

Access over 245,000 papers and keep pace with the latest technological advancements relevant to your work.

SPIE Digital Library

MILESTONE SERIES



Milestone Series volumes are collections of seminal papers covering important developments in optics.

Milestone Series

PUBLISH YOUR WORK

Thousands of people from academia, industry, and national labs publish their work with SPIE every year. Get the recognition you deserve.

Proceedings Authors
Journal Authors
Book Authors

Appendix OVADIA05

http://web.archive.org/web/20070615000000*/http://spie.org/x2836.xml 2024-02-09T06:35:42-05:00

INTERNET ARCHIVE

SIGN UP | LOG IN UPLOAD Search

ABOUT BLOG PROJECTS HELP DONATE CONTACT JOBS VOLUNTEER PEOPLE

DONATE


INTERNET ARCHIVE WayBackMachine


Explore more than 866 billion web pages saved over time

http://spie.org/x2836.xml

Calendar · Collections · Changes · Summary · Site Map · URLs

Saved **198 times** between May 1, 2007 and March 31, 2022.

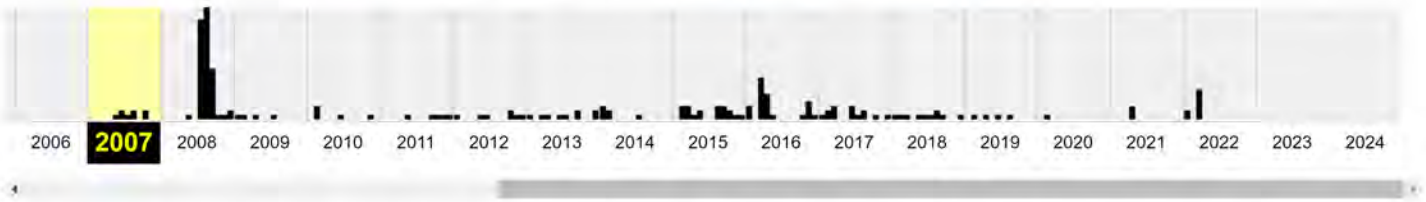

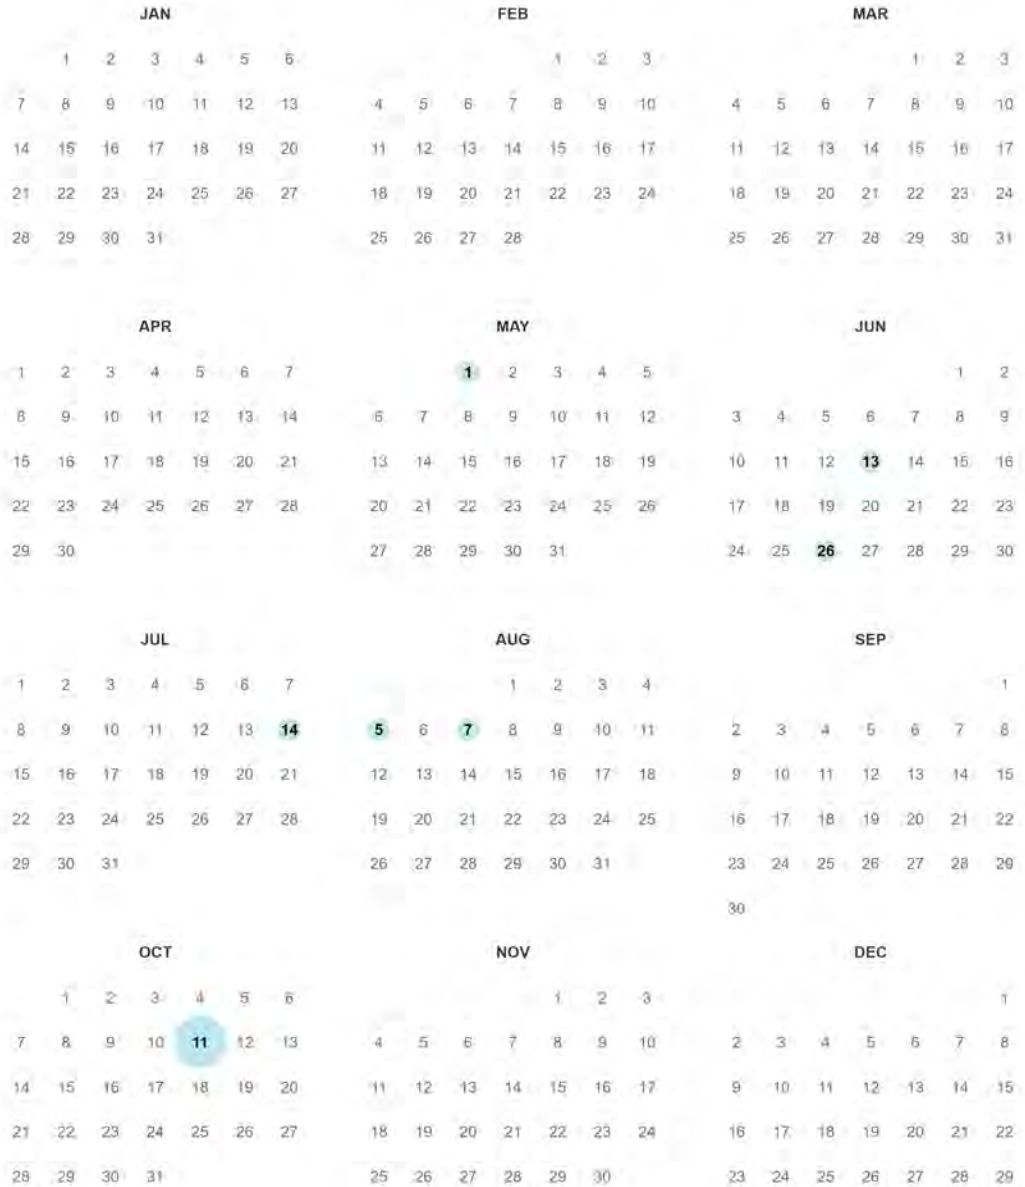

Note

This calendar view maps the number of times **http://spie.org/x2836.xml** was crawled by the Wayback Machine, *not* how many times the site was actually updated. More info in the FAQ.

FAQ | Contact Us | Terms of Service (Dec 31, 2014)



The Wayback Machine is an initiative of the Internet Archive, a 501(c)(3) non-profit, building a digital library of Internet sites and other cultural artifacts in digital form. Other projects include Open Library & archive-it.org.

Your use of the Wayback Machine is subject to the Internet Archive's Terms of Use.

http://web.archive.org/web/20070626111859/http://spie.org/x2836.xml 2024-02-09T06:35:32-05:00

http://spie.org/x2836.xml Go MAY JUN AUG
198 captures 26
1 May 2007 - 31 Mar 2022 2006 2007 2008 About this capture

SPIE
Connecting minds. Advancing light.

SPIE is an international society advancing an interdisciplinary approach to the science and application of light.

SPIE Digital Library

Keep pace with the latest technological advancements—and your competition—with the most extensive, dynamic, and essential resource available for today's innovators:

SPIE Digital Library

Fuel for Thought
Subscribe to the SPIE Digital Library today and save precious time, leverage 50 years of experience, and benefit from the preeminent source for photonics-based content.

- Powerful search and browse tools
- New content added daily
- Rapid publication, utilizing e-First
- E-mail Alerts for the latest published articles
- Reference and forward linking via CrossRef
- Citation meta data available for easy download
- Article collections for group collaboration

Browse and choose from over 235,000 Journal and Proceedings articles from 1990 to present.

Institutional and Corporate Subscriptions
Request pricing information for your organization.

Personal Subscriptions
Personal subscriptions to the SPIE Digital Library include 50 article downloads, which provides a significant savings over single paper purchases.

- Subscription details and pricing
- Subscribe now

Pay Per Download
Even with the cost savings, an annual subscription may not be right for you. You may browse and buy papers from the SPIE Digital Library for a per-paper fee of only $18 USD for Conference Proceedings and $25 USD for Journal articles.

PUBLISH YOUR WORK

Thousands of people from academia, industry, and national labs publish their work with SPIE every year. Get the recognition you deserve.

Proceedings Authors
Journal Authors
Book Authors

FIELD GUIDES



Written for the practicing engineer or scientist, SPIE Field Guides provide focused information at your fingertips.

Field Guides

SPIE © 2007

ABOUT SPIE | PRIVACY POLICY | SPIEWORKS JOB SITE