US007821372B2

(12) **United States Patent**
Ho-Hsiang

(10) **Patent No.: US 7,821,372 B2**
(45) **Date of Patent: Oct. 26, 2010**

(54) **ON-CHIP TRANSFORMER BALUN STRUCTURES**

(75) Inventor: **Chen Ho-Hsiang**, Hsinchu (TW)

(73) Assignee: **Taiwan Semiconductor Manufacturing Co., Ltd.**, Hsin-Chu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 62 days.

(21) Appl. No.: **12/347,569**

(22) Filed: **Dec. 31, 2008**

(65) **Prior Publication Data**

US 2010/0164667 A1 Jul. 1, 2010

(51) **Int. Cl.**
H01F 5/00 (2006.01)

(52) **U.S. Cl.** **336/200**

(58) **Field of Classification Search** 336/65, 336/200, 206–208, 232; 257/531
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,816,784	A *	3/1989	Rabjohn	333/24 R
5,877,667	A	3/1999	Wollesen	
6,097,273	A *	8/2000	Frye et al.	336/200
6,188,306	B1	2/2001	Wollesen	
6,380,821	B1	4/2002	Imbornnone et al.	
6,577,219	B2 *	6/2003	Visser	336/200
6,603,383	B2	8/2003	Gevorgian et al.	
6,653,910	B2 *	11/2003	Escalera et al.	333/26
6,794,977	B2 *	9/2004	Christensen	336/200
6,943,658	B2 *	9/2005	Gardner	336/200
7,088,214	B2 *	8/2006	Castaneda et al.	336/200
7,164,339	B2	1/2007	Huang	
7,171,739	B2	2/2007	Yang et al.	
7,184,735	B2	2/2007	Bhatti et al.	
7,253,712	B1	8/2007	Papananos	

* cited by examiner

Primary Examiner—Tuyen Nguyen
(74) *Attorney, Agent, or Firm*—Duane Morris LLP

(57) **ABSTRACT**

An electronic device includes a first winding having a first port and a second port. The first winding formed in a first metal layer. A second winding has a third port and a fourth port. The second winding includes a plurality of segments formed in the first metal layer. The second plurality of winding segments are connected by a bridge formed in a second metal layer. The first and second ports of the first winding are connected to the inner-portion of the first winding.

18 Claims, 17 Drawing Sheets

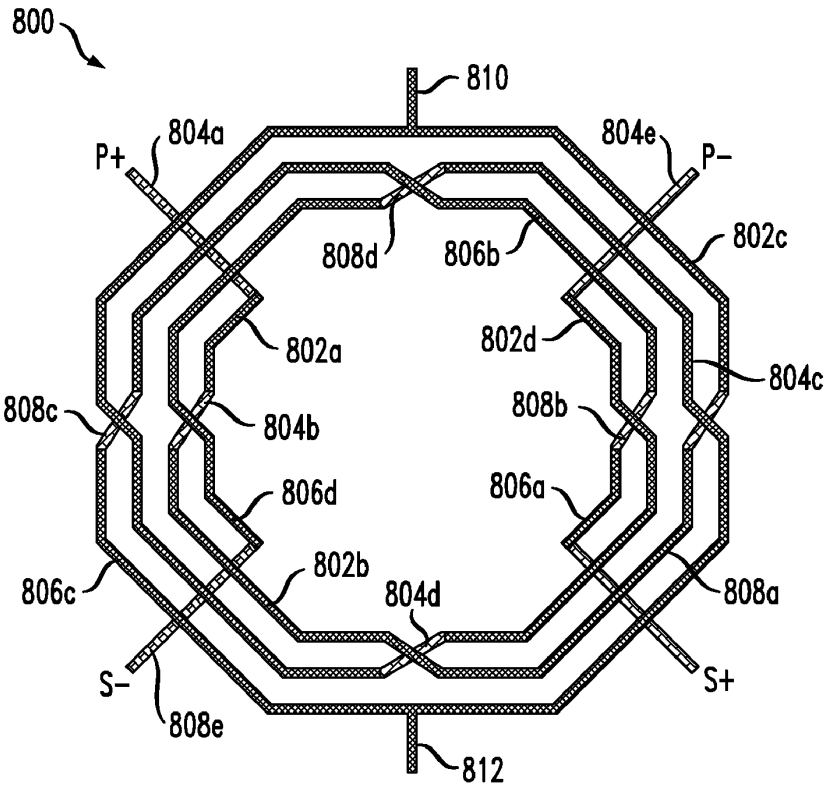

FIG. 1B
(PRIOR ART)

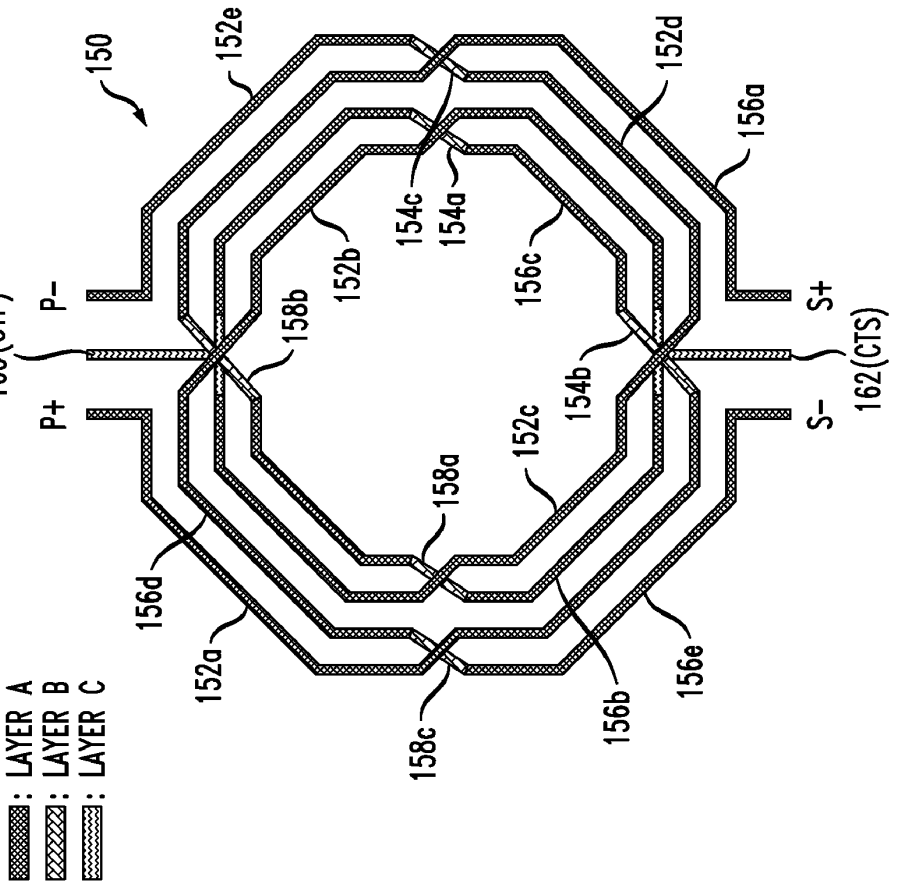

FIG. 1A
(PRIOR ART)

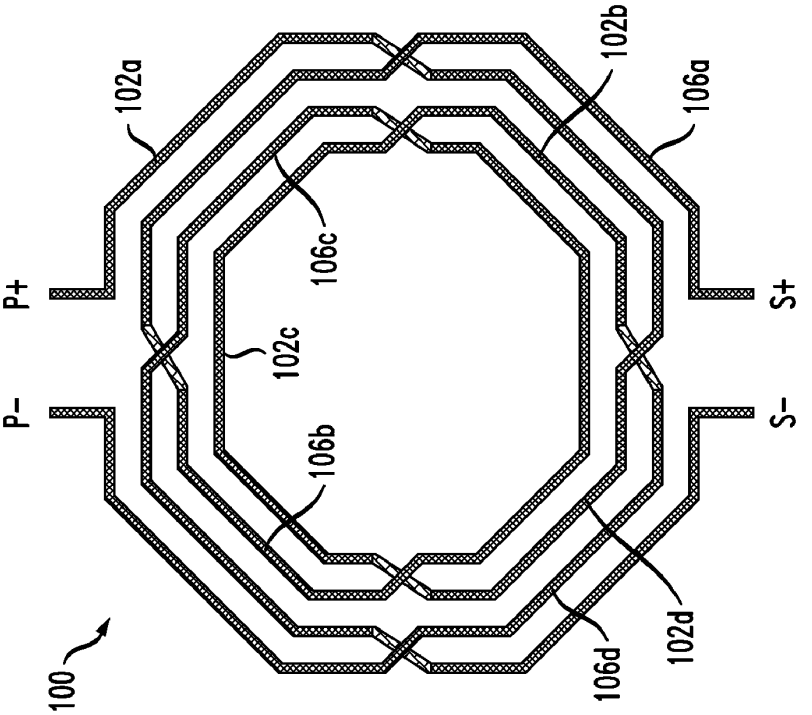

FIG. 2A

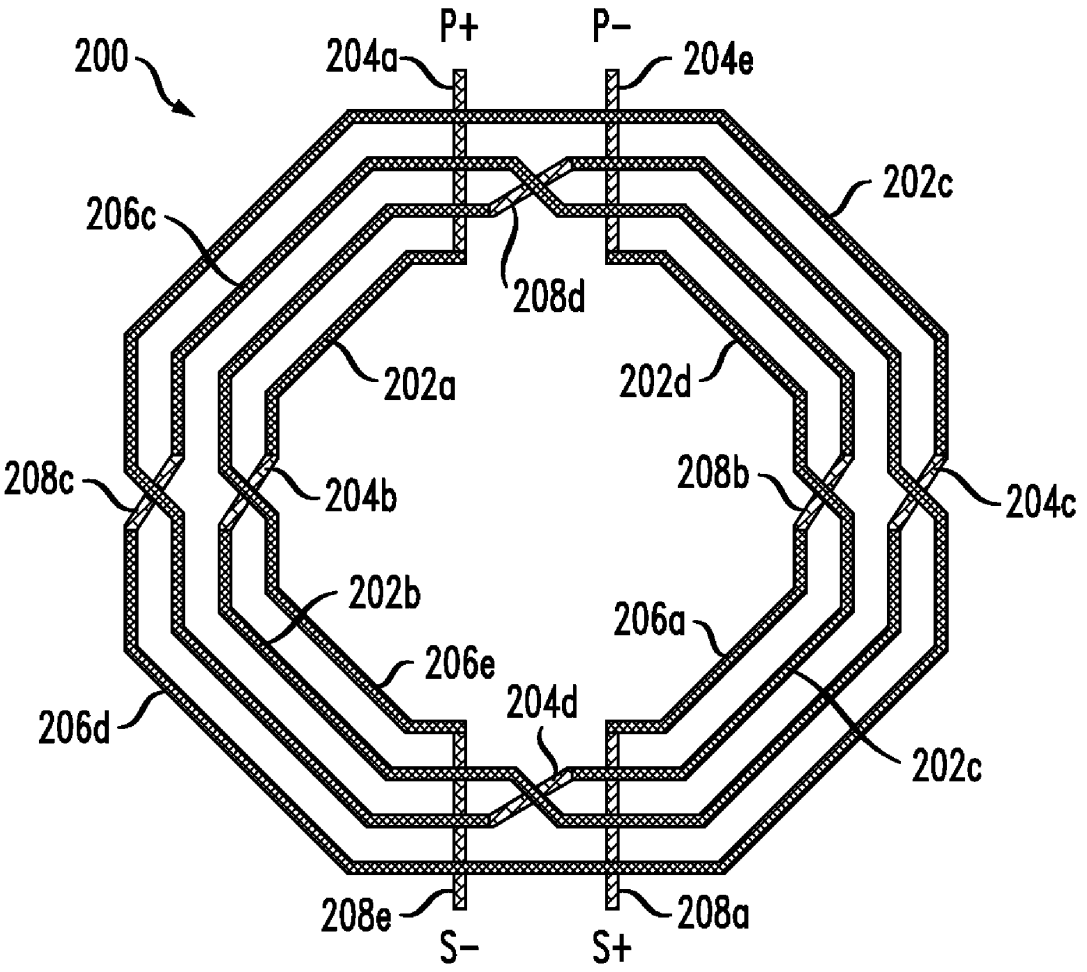
200
P+
P−
204a
204e
206c
202c
208d
202a
202d
208c
204b
208b
204c
202b
206a
206e
204d
206d
202c
208e
208a
S−
S+

FIG. 2B

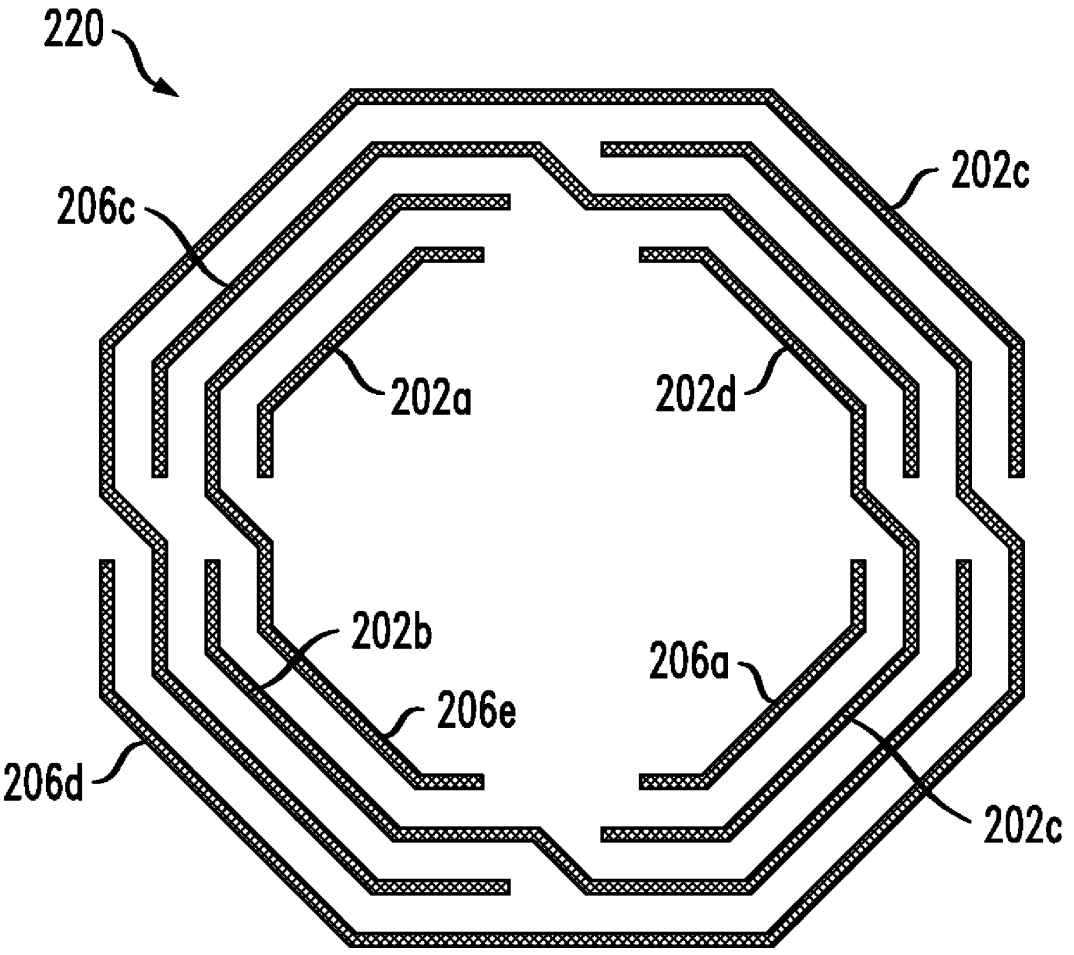

FIG. 2C

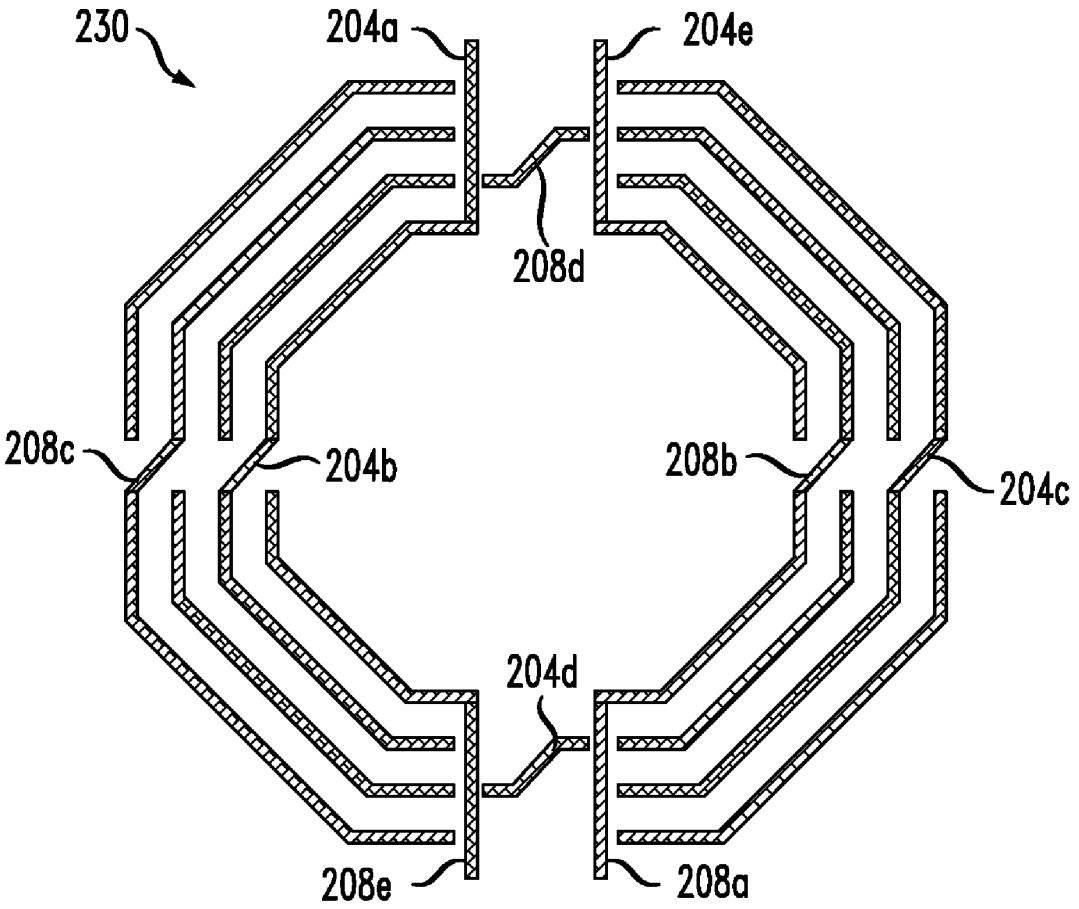

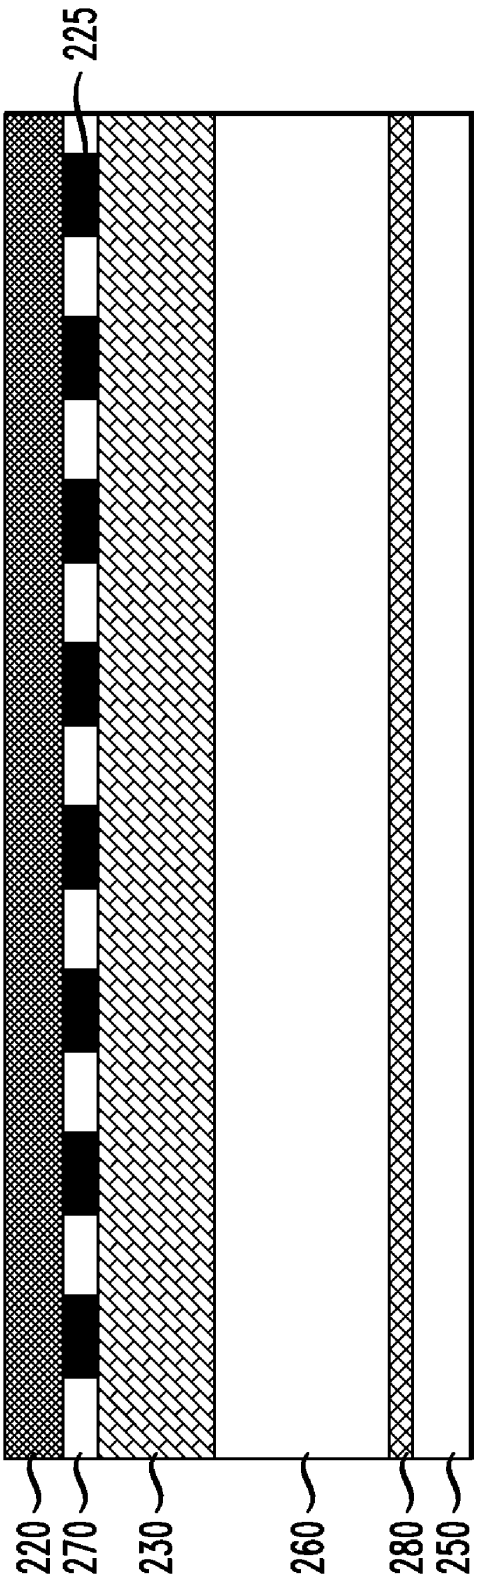

FIG. 2D

FIG. 3

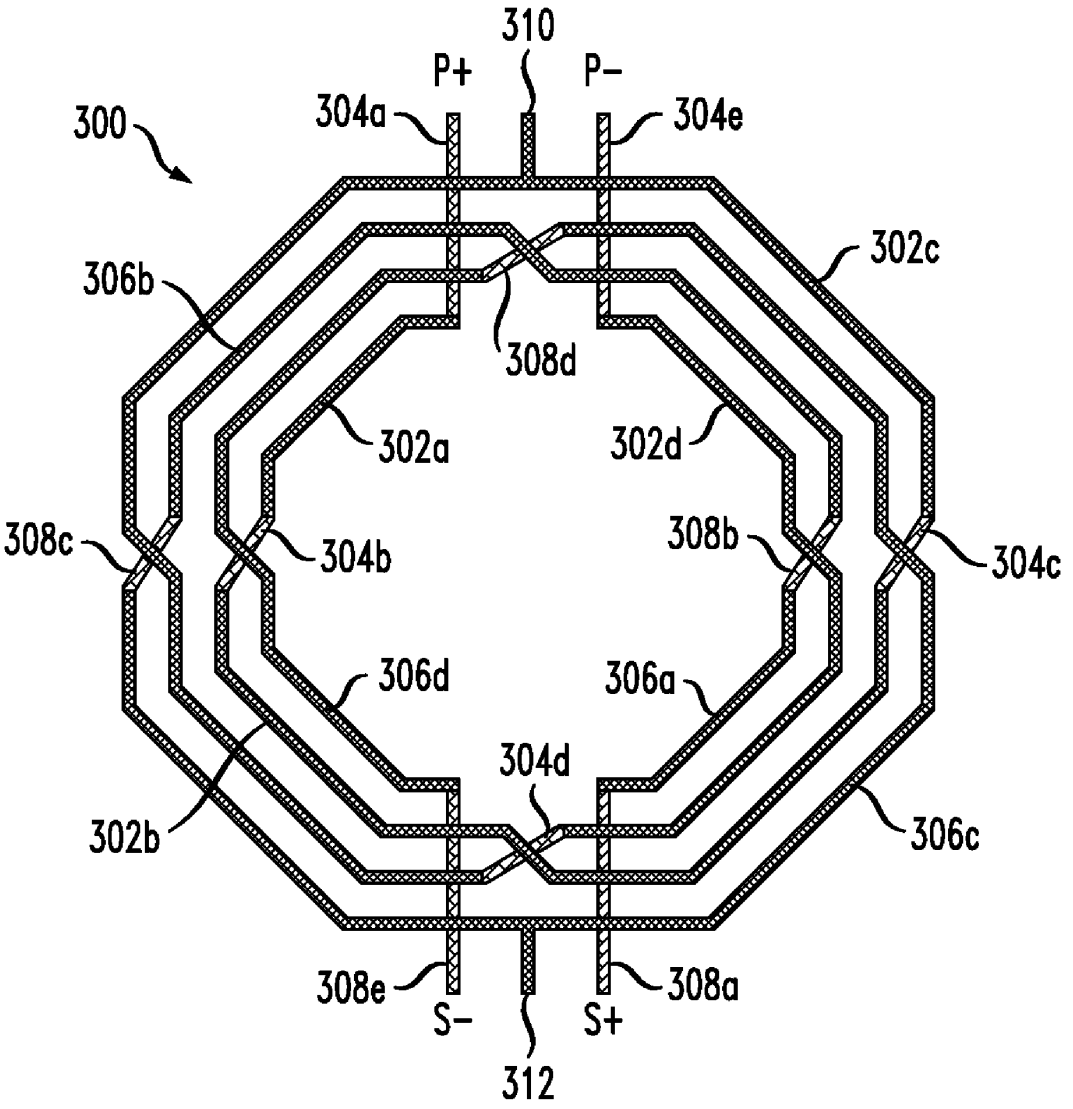
310
P+
P−
304a
304e
300
306b
302c
308d
302a
302d
308c
304b
308b
304c
306d
306a
304d
302b
306c
308e
308a
S−
S+
312

FIG. 4

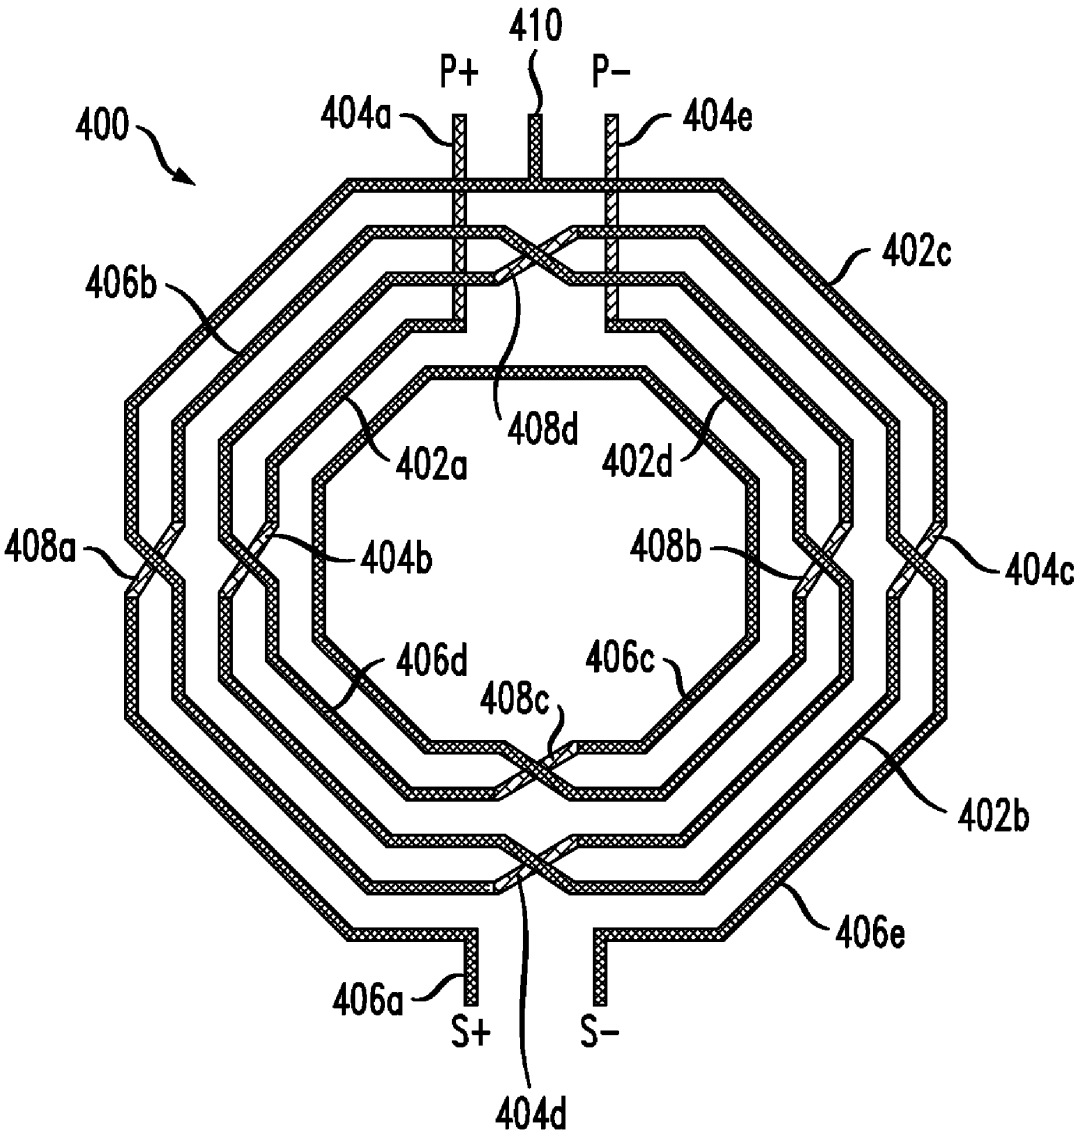
410
P+
P−
400
404a
404e
406b
402c
408d
402a
402d
408a
404b
408b
404c
406d
406c
408c
402b
406e
406a
S+
S−
404d

FIG. 5

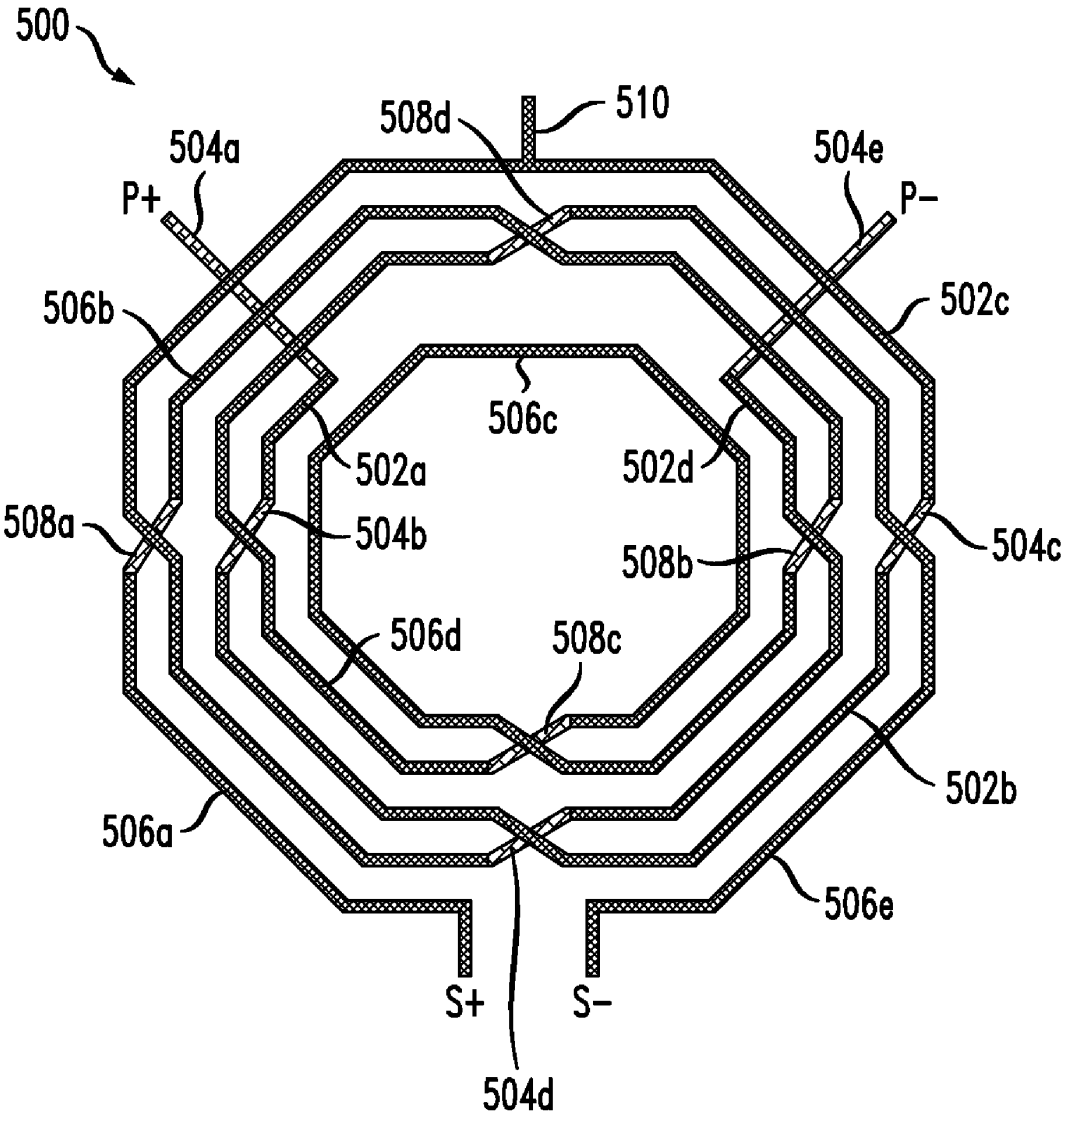
500
508d
510
504a
P+
504e
P−
506b
502c
506c
502a
502d
508a
504b
504c
508b
506d
508c
502b
506a
506e
S+
S−
504d

FIG. 6

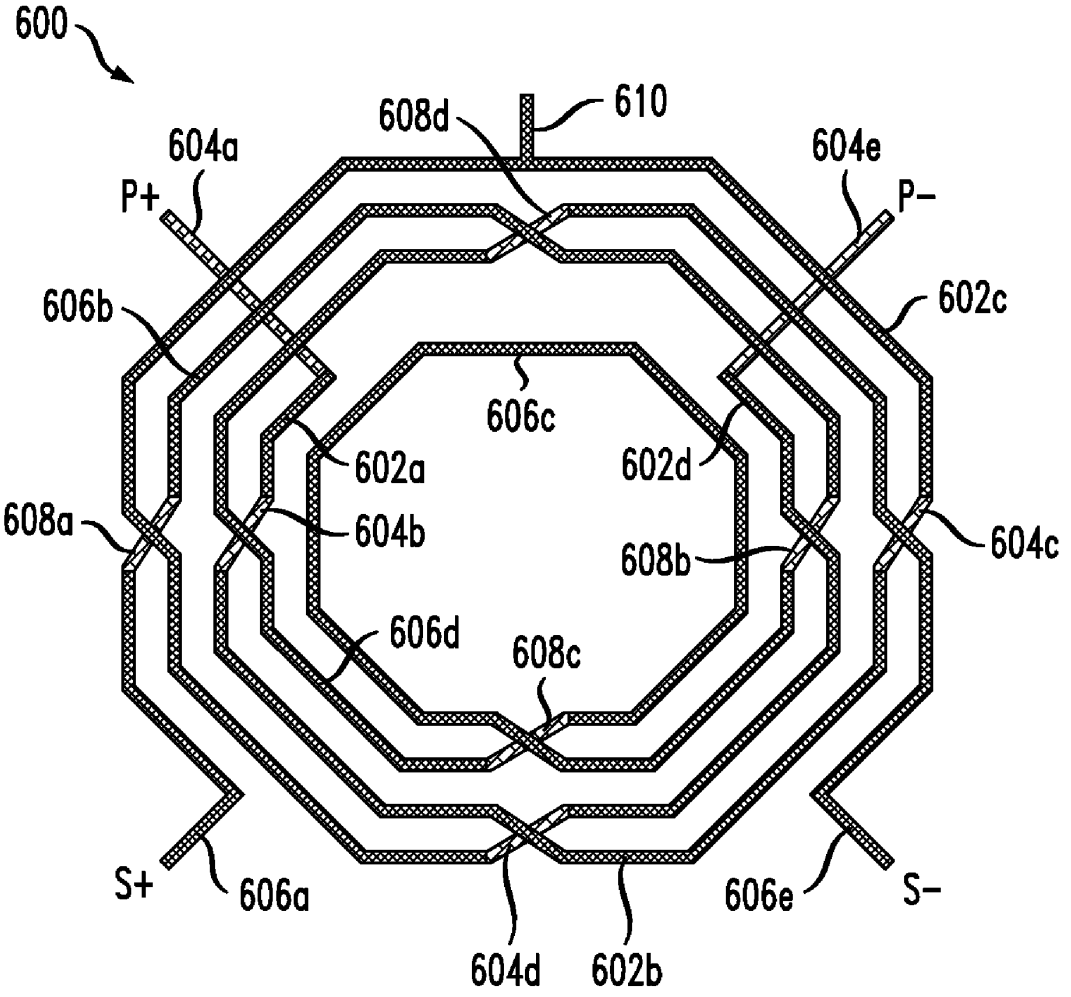
600
608d
610
604a
P+
604e
P−
606b
602c
606c
602a
602d
608a
604b
604c
608b
606d
608c
S+
606a
606e
S−
604d
602b

FIG. 7

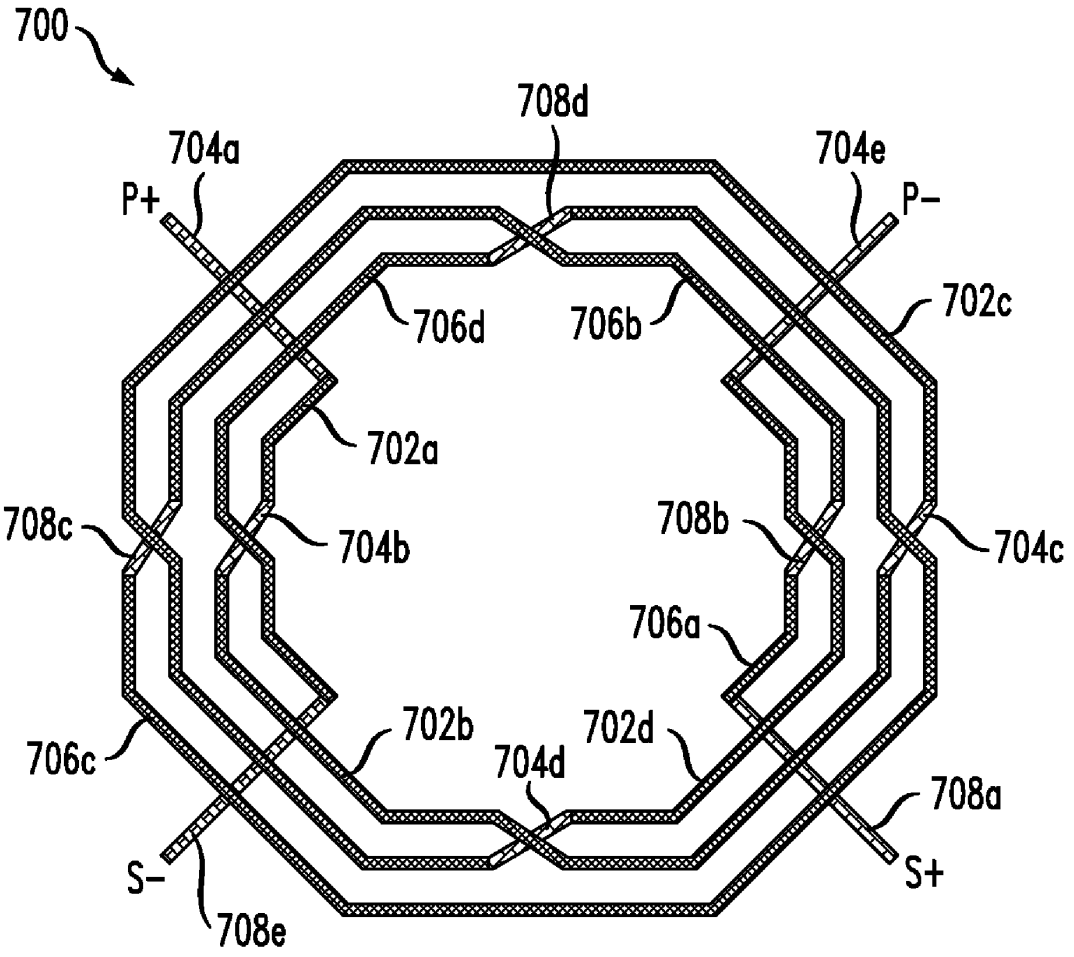
700
708d
704a
P+
704e
P−
706d
706b
702c
702a
708c
704b
708b
704c
706a
706c
702b
702d
704d
708a
S−
S+
708e

FIG. 8

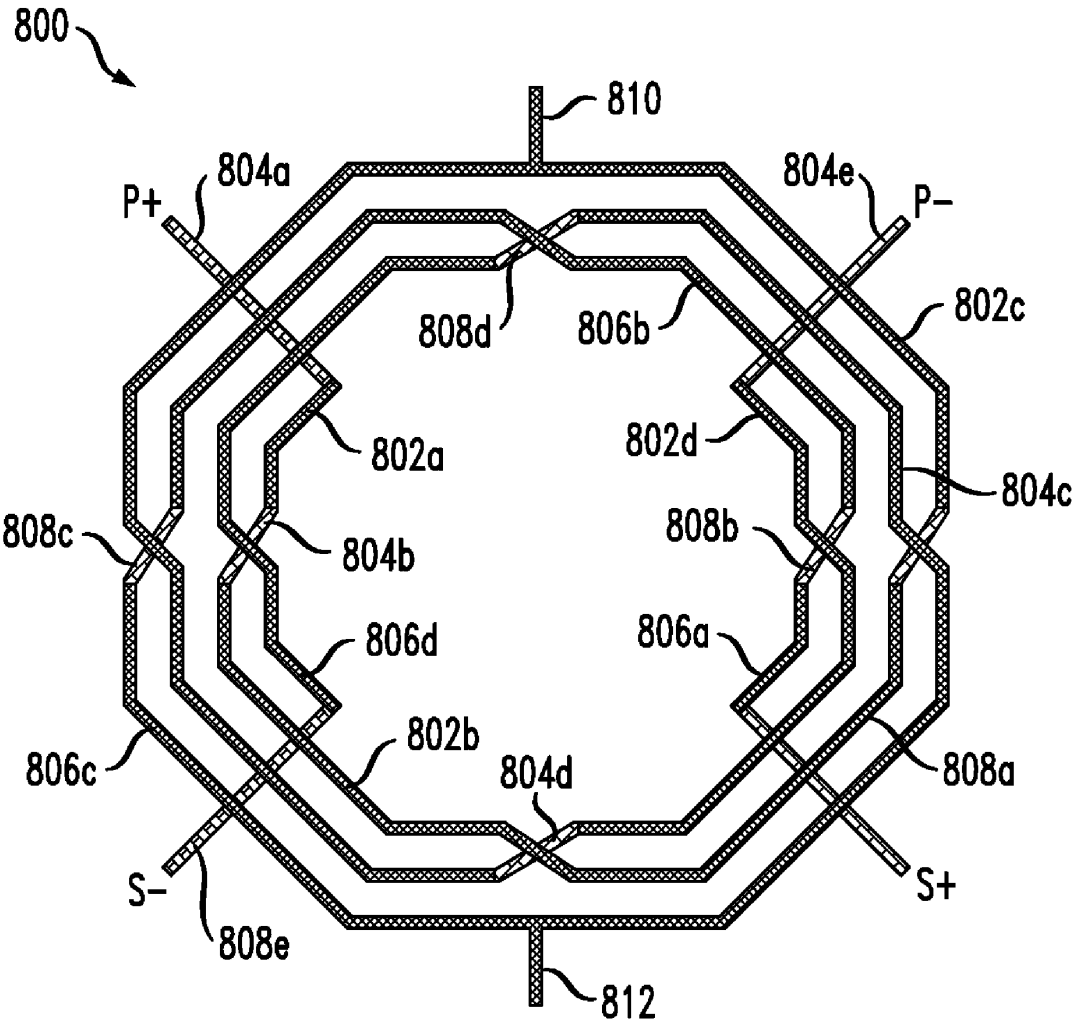
800
810
804a
P+
804e
P−
808d
806b
802c
802a
802d
804c
808c
804b
808b
806d
806a
802b
806c
804d
808a
S−
S+
808e
812

FIG. 9A

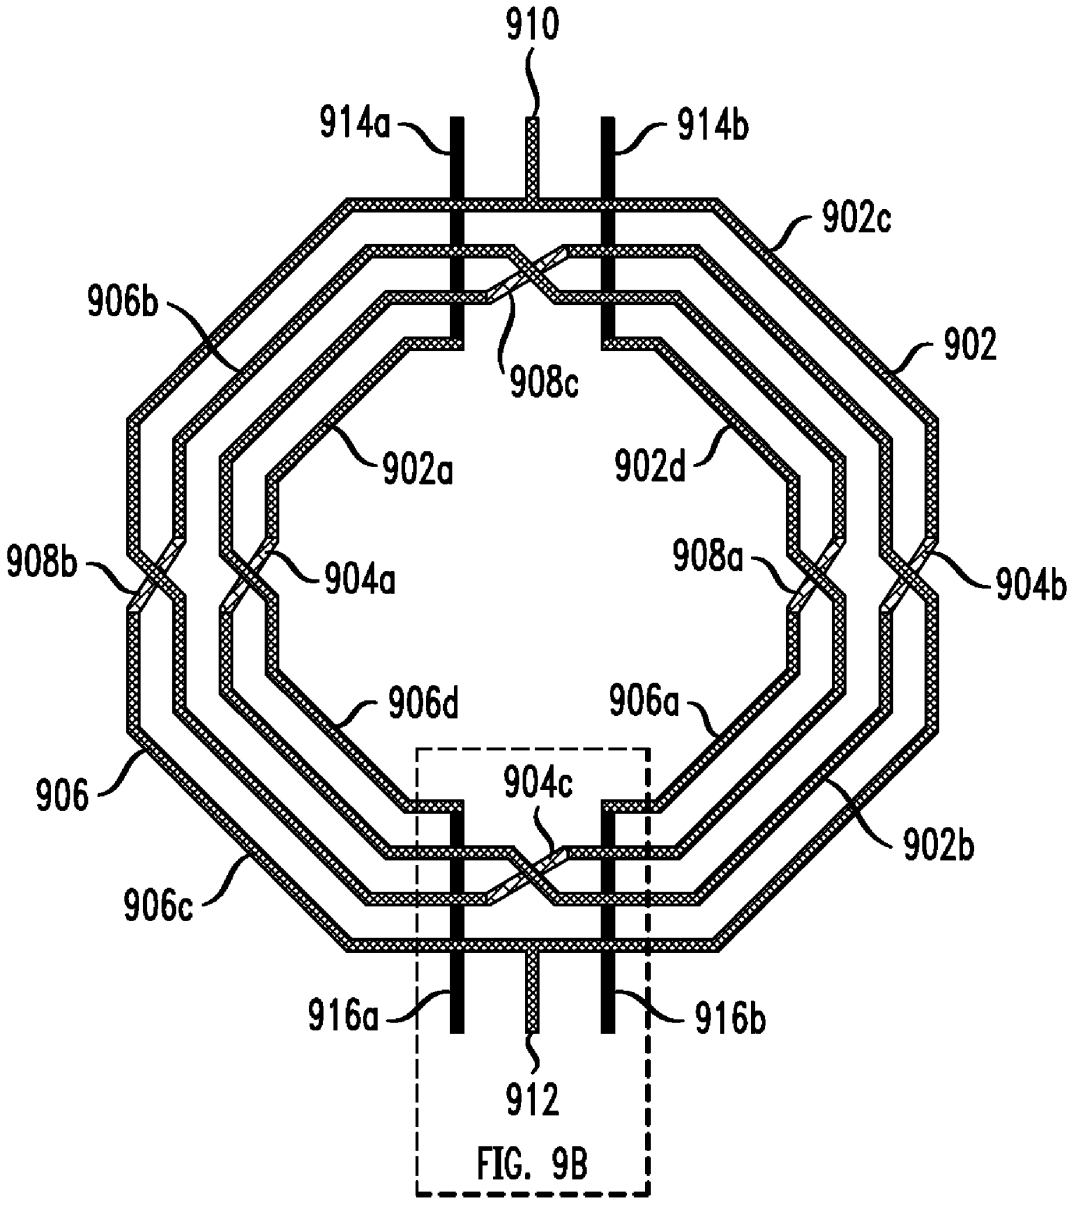
910
914a
914b
902c
906b
902
908c
902a
902d
908b
908a
904b
904a
906d
906a
906
904c
902b
906c
916a
916b
912
FIG. 9B

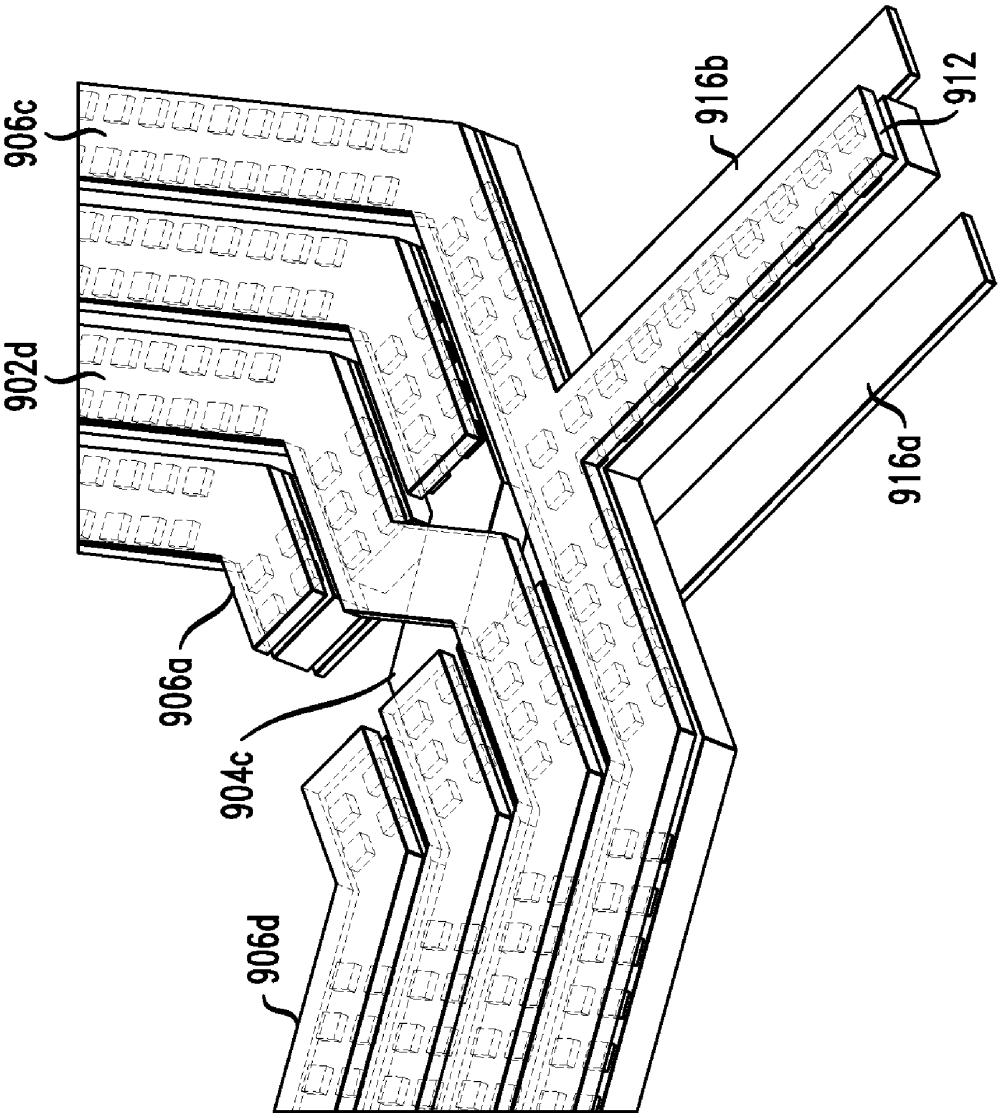

FIG. 9B

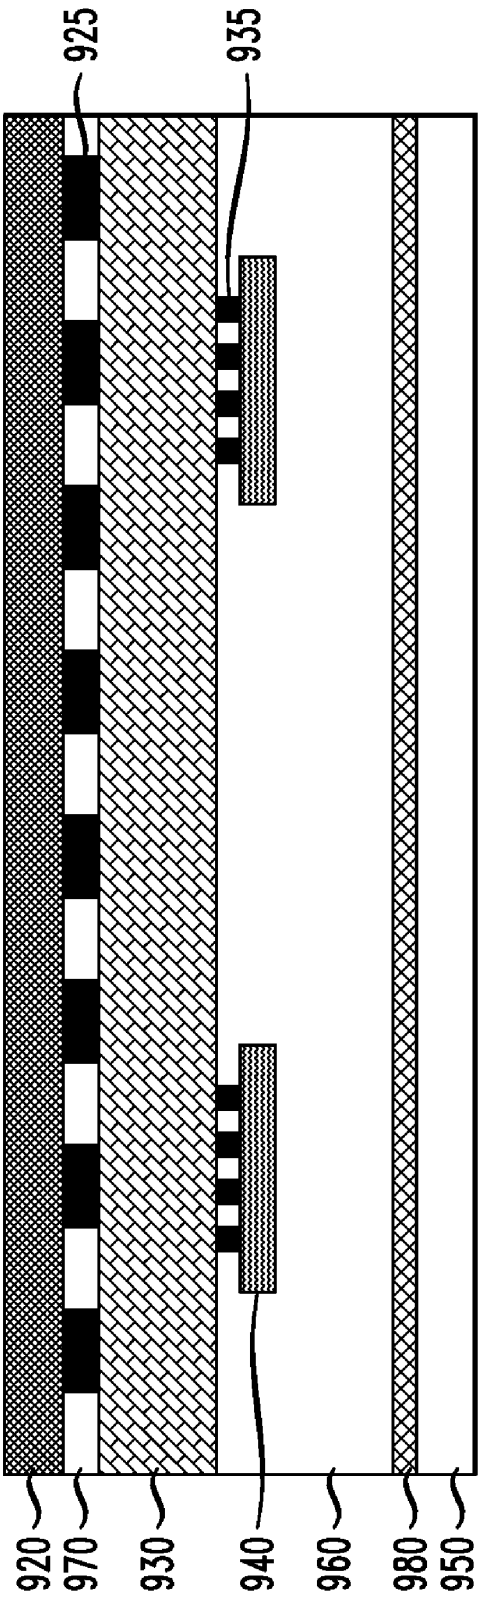

FIG. 9C

FIG. 10

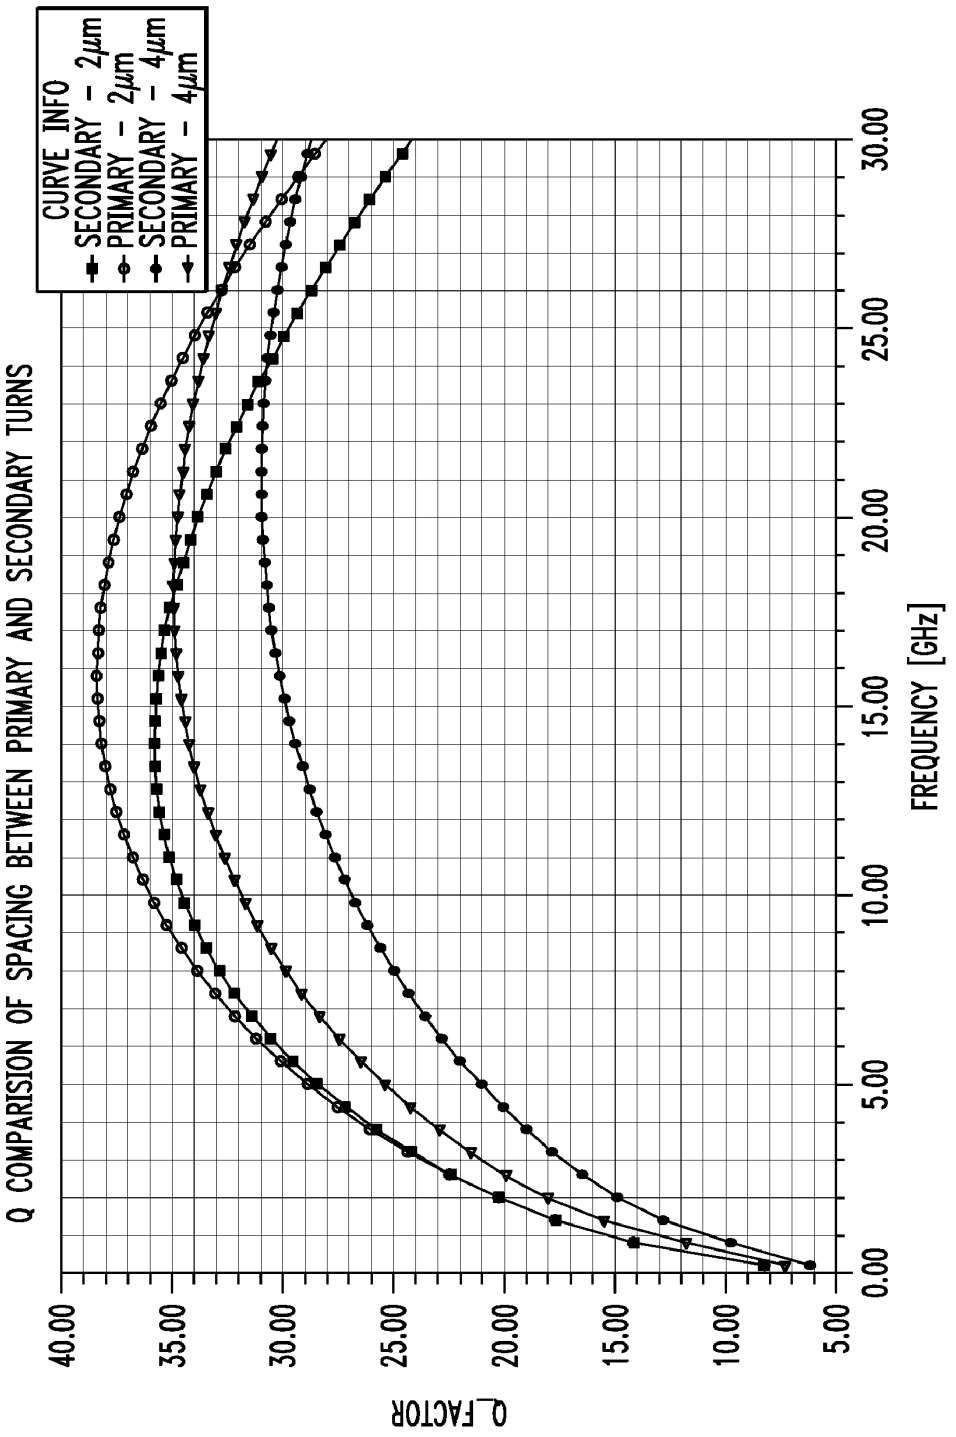
Q COMPARISION OF SPACING BETWEEN PRIMARY AND SECONDARY TURNS
CURVE INFO
SECONDARY - 2μm
PRIMARY - 2μm
SECONDARY - 4μm
PRIMARY - 4μm
Q_FACTOR
40.00
35.00
30.00
25.00
20.00
15.00
10.00
5.00
FREQUENCY [GHz]
0.00
5.00
10.00
15.00
20.00
25.00
30.00

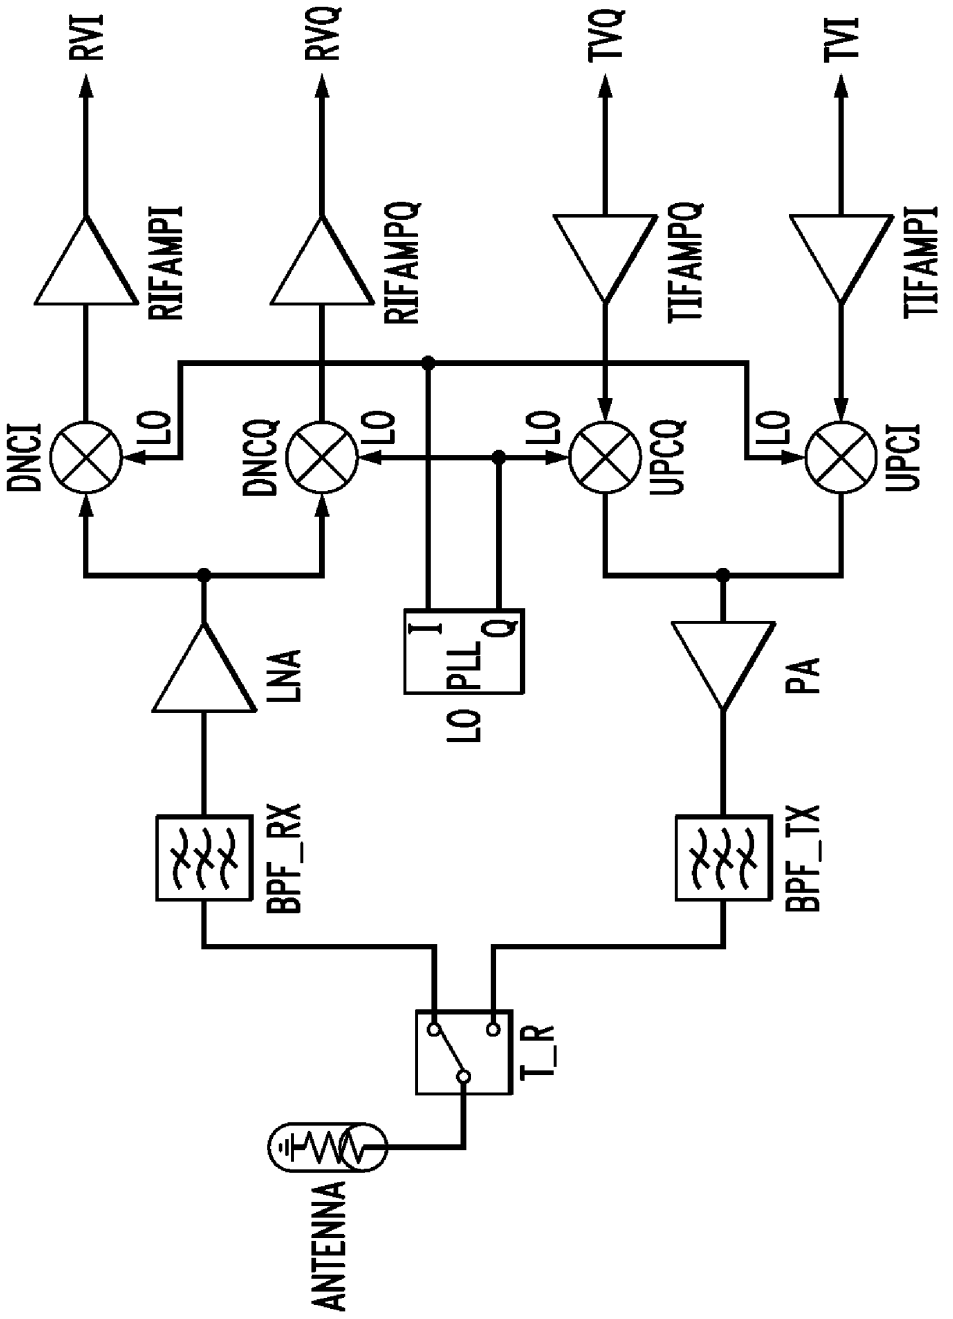
RVI
RVQ
TVQ
TVI
RIFAMPI
RIFAMPQ
TIFAMPQ
TIFAMPI
DNCI
DNCQ
UPCQ
UPCI
LO
LNA
PLL
I
Q
LO
PA
BPF_RX
BPF_TX
T_R
ANTENNA

FIG. 11

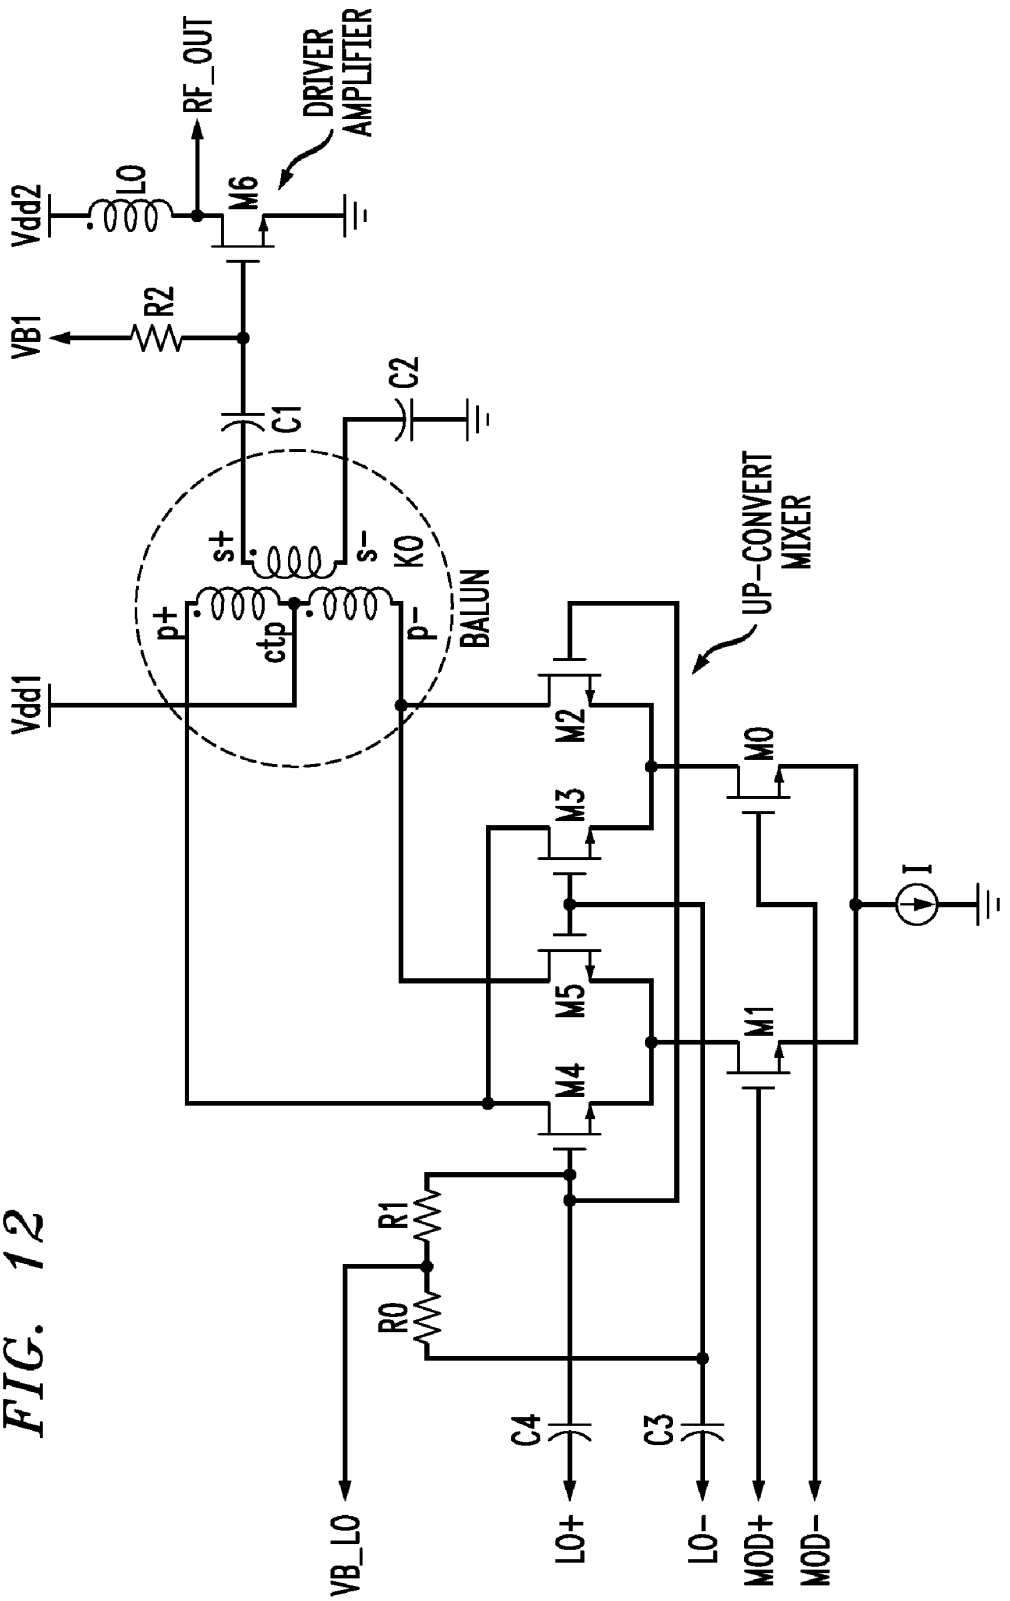
RF_OUT
DRIVER AMPLIFIER
Vdd2
LO
M6
VB1
R2
C1
C2
s+
s-
KO
p+
ctp
p-
BALUN
Vdd1
UP-CONVERT MIXER
M2
M0
M3
I
M5
M1
M4
R1
R0
C4
C3
VB_LO
LO+
LO-
MOD+
MOD-

FIG. 12

ON-CHIP TRANSFORMER BALUN STRUCTURES

FIELD OF DISCLOSURE

The disclosed system and method relate to transformers and balanced-to-unbalanced (BALUN) devices. More specifically, the disclosed system and method relate to on-chip symmetrical transformers and BALUN devices.

BACKGROUND

Transformers and balanced-to-unbalanced (BALUN) devices are commonly used in wireless communications. For example, transformers and BALUNS are frequently used in transceivers in wireless communication devices as illustrated in FIGS. **11** and **12**. As shown in FIG. **12**, the modulator includes a conventional BALUN K**0** having a center tap CTP connected to Vdd**1**. Conventional coplanar interleaved transformers used in such applications have the primary and secondary windings interleaved on the same integrated circuit layer. The primary and secondary windings are constructed of planar metal traces.

FIG. **1**A illustrates a conventional coplanar symmetric transformer **100** having a 2:2 turn ratio. As shown in FIG. **1**A, the transformer **100** includes a primary winding **102** and a secondary winding **106**, which are both located on the same metal layer. The segments **102***a*, **102***b*, **102***c*, and **102***d* that comprise primary winding **102** are connected by metal bridges **104***a*, **104***b*, and **104***c* formed on a separate metal layer and connecting vias (not shown). Similarly, the secondary winding **106** is comprised of segments **106***a*, **106***b*, **106***c*, and **106***d* that are formed on the same metal layer as the segments comprising the primary winding **106**. Additionally, metal bridges **108***a*, **108***b*, and **108***c* that connect the segments **106***a*, **106***b*, **106***c*, and **106** that form secondary winding **106** are formed on the same metal layer on which metal bridges **104***a*, **104***b*, and **104***c* are formed. While conventional coplanar interleaved transformers reduce the size and resistance, they suffer from low quality (Q) factors and small coupling coefficients.

FIG. **1**B illustrates a conventional coplanar BALUN device **150** having a 2:2 turn ratio. BALUN device **150** includes a primary winding **152** and a secondary winding **156**. Primary winding **152** includes winding segments **152***a*, **152***b*, **152***c*, **152***d*, and **152***e*, which are formed on a first metal layer and are connected by metal bridges **104***a*, **104***b*, and **104***c* formed on a second metal layer. Center tap **160** is formed on a third metal layer and connects primary winding segments **152***b* and **152***c*.

Secondary winding **156** is also formed from a plurality of winding segments **156***a*, **156***b*, **156***c*, **156***d*, and **156***e* formed on the same metal layer as primary winding **152**. Secondary winding segments **156***a-e* are connected by metal bridges **158***a*, **158***b*, and **158***c* located on the same metal layer as metal bridges **154***a-c*. Center tap **162** is formed on the same metal layer as center tap **160** and connects winding segments **156***b* and **156***c*.

As shown in FIG. **1**B, the center taps **160** and **162** are connected at the inner-most portion of the BALUN **150** and extend to the outer-most portion. This center tap location is an undesirable location as it may result in high current density on the center taps **160**, **162**, which may have a detrimental affect on the reliability of the circuit due to electromigration. For example, the reliability of a transceiver circuit as illustrated in FIG. **12** would be detrimentally affected if a BALUN **150**, as illustrated in FIG. **1**B, were implemented as the BALUN in FIG. **12** as the location of the center tap **160**, e.g., CTP in FIG. **12**, would have a high current density. Additionally, if the BALUN illustrated in FIG. **12** included a center tap on the secondary winding (CTS) as shown in FIG. **1**B, e.g., center tap **162** in FIG. **1**B, the reliability of the transceiver circuit would be reduced.

Accordingly, improved transformers and BALUNs are desired.

SUMMARY

In one embodiment, an electronic device includes a first winding having a first port and a second port. The first winding formed in a first metal layer formed over a semiconductor substrate. A second winding has a third port and a fourth port. The second winding includes a plurality of segments formed in the first metal layer. The second plurality of winding segments is connected by a bridge formed in a second metal layer. The first and second ports of the first winding are connected to the inner-portion of the first winding.

In one embodiment, a two metal-layer electronic device comprises a primary winding having a first set of ports. The primary winding includes a first plurality of winding segments formed in a first metal layer formed over a semiconductor substrate. A first plurality of bridges is formed in a second metal layer. The first plurality of bridges connects the first plurality of winding segments. A secondary winding has a second set of ports. The secondary winding includes a second plurality of winding segments formed in the first metal layer. A second plurality of bridges is formed in the second metal layer. The second plurality of bridges connects the second plurality of winding segments. The first set of ports is located at the innermost portion of the primary winding.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1**A is a top view of a conventional on-chip transformer.

FIG. **1**B is a top view of a conventional on-chip BALUN.

FIG. **2**A is a top view of a transformer having a 2:2 turn ratio in accordance with the present disclosure.

FIG. **2**B illustrates the first metal layer pattern of the transformer illustrated in FIG. **2**A.

FIG. **2**C illustrates the second metal layer pattern of the transformer illustrated in FIG. **2**A.

FIG. **2**D is a cross-sectional view of the transformer illustrated in FIG. **2**A.

FIG. **3** is a top view of a BALUN device having a 2:2 turn ratio in accordance with the present disclosure.

FIG. **4** is a top view of a BALUN having a 2:3 turn ratio in accordance with the present disclosure.

FIG. **5** is a top view of a BALUN having an inductor with a non-integer number of turns in accordance with the present disclosure.

FIG. **6** is a top view of a BALUN with both inductors having non-integer number of turns in accordance with the present disclosure.

FIG. **7** is a top view of a transformer with both inductors having non-integer number of turns and non-parallel ports in accordance with the present disclosure.

FIG. **8** is a top view of a BALUN with both inductors having non-integer number of turns and non-parallel ports in accordance with the present disclosure.

FIG. **9**A is a top view of a transformer having a 2:2 turn ratio in accordance with the present disclosure.

FIG. **9**B is an isometric cross-sectional view of the transformer shown in FIG. **9**A.

FIG. **9**C is a cross-sectional view of the transformer illustrated in FIG. **9**A.

FIG. **10** is a combined graph of quality factor versus frequency and inductance versus frequency.

FIG. **11** is a block diagram of a transceiver in which a BALUN or transformer may be implemented.

FIG. **12** is a circuit diagram of a mixer circuit of the transceiver illustrated in FIG. **11**.

DETAILED DESCRIPTION

An improved system and method of on-chip symmetrical transformers/BALUNS devices are now described. FIG. **2**A illustrates one exemplary layout of a symmetric on-chip transformer **200** having a 2:2 turn ratio. Transformer **200** includes a primary winding **202** and a secondary winding **206**. Primary winding **202** is formed from winding segments **202***a*, **202***b*, **202***c*, and **202***d* formed on a first metal layer **220** as shown in FIGS. **2**B and **2**D and on a second metal layer **230** as shown in FIGS. **2**C and **2**D. Secondary winding **206** is formed on the same metal layers and comprises winding segments **206***a*, **206***b*, **206***c*, and **206***d*. In some embodiments, the primary and secondary windings **202**, **206** are formed on a first metal layer **220** which has a thickness between one and three microns and a second metal layer **230** having a thickness between one an three microns. One skilled in the art will understand that the primary and secondary windings **202**, **206** may be formed on metal layers having other thicknesses. For example, in some embodiments, the metal patterns shown in FIG. **2**B may be formed on the second metal layer **230**, and the metal patterns shown in FIG. **2**C may be formed on the first metal layer **220**. In some embodiments, first metal layer **220** and second metal layer **230** may be connected by one or more vias **225**.

The Q-factor of a transformer or BALUN improves as the thickness of the metal layer on which the windings are formed is increased. FIG. **10** is a graph showing both the Q-factor versus frequency and the inductance versus frequency for primary and secondary windings made using metal layers having different thickness in a transformer having a 2:2 turn ratio. The thin metal layer plot was created with metal layers having a thickness of 1 micron, and the thick metal layer plot was created with metal layers having thickness of microns. As shown in FIG. **10**, the Q-factor is higher for the thick metal layers than for thin metal layers for all frequencies.

The winding segments **202***a*-**202***d* that comprise the primary winding **202** are connected by metal bridges **204***a*, **204***b*, **204***c*, **204***d*, and **204***e*, which are formed on a second metal layer **230** as illustrated in FIG. **2**C. The winding segments **206***a*, **206***b*, **206***c*, and **206***d* that form secondary winding **206** are also connected by metal bridges **208***a*, **208***b*, **208***c*, **208***d*, and **208***e* that are formed on the second metal layer **230** as the layer on which the metal bridges **204***a*-**204***c* are formed. The second metal layer **230** on which the metal bridges **204***a*-**204***c*, **208***a*-**208***c* are formed may also have a thickness between one and three microns although the metal layer may have other thicknesses.

FIG. **2**D is a cross-sectional view of the transformer **200** illustrated in FIG. **2**A. As shown in FIG. **2**D, the two metal layers **220**, **230** are vertically stacked over one another and are separated by a dielectric layer **270**. Examples of dielectric materials suitable for these layers include, but are not limited to, SiO_2, PSG, BPSG, and SiN. The metal layers **220**, **230** are formed over a second dielectric layer **260**, which is formed over a guard ring **280**. Guard ring **280** is formed over a semiconductor substrate **250**.

Referring again to FIG. **2**A, transformer **200** is formed so that current flows from the inner part of transformer **200** to the outer part of transformer **200**. For example, when connected to another circuit or device, current will flow into metal bridge **204***a*, which serves as a port to primary winding **202**, and out of metal bridge **204***e* which serves as a second port to primary winding **202**. In this manner, current flows from the inner portion to the outer portion of transformer **200**. Forming the transformer such that current flows from the inside to the outside of the transformer **200** reduces the current density at the center of the transformer. Reducing the current density at the center of the transformer improves the reliability of the transformer **200** by reducing the likelihood of electromigration. For example, implementing a BALUN or transformer using a metal layer having a thickness of one micron may reduce the current density by a factor of seven, and using a metal layer having a thickness of approximately three microns may reduce the current density by a factor of twenty-five.

A BALUN device **300** may be formed in a similar manner to the transformer **200** shown in FIG. **2**. Features in FIG. **3** which are identical to those in FIG. **2** are identified by having reference numerals with the same two least significant digits as the features in FIG. **2**, but increased by 100. For example, FIG. **3** illustrates a BALUN device **300** having a 2:2 turn ratio formed on only two metal layers, unlike conventional BALUN devices which are formed on three or four metal layers. As shown in FIG. **3**, BALUN **300** includes a primary winding **302** comprising winding segments **302***a*, **302***b*, **302***c*, and **302***d*, which are formed on a first metal layer. The primary winding segments **302***a*-**302***d* are connected with bridges **304***a*, **304***b*, **304***c*, **304***d*, and **304***e*, which are formed on a second metal layer, which may be formed vertically above or below the first metal layer.

Secondary winding **306** is formed on the same metal layer as primary winding **302** and comprises winding segments **306***a*, **306***b*, **306***c*, and **306***d*. Secondary winding segments **306***a*-**306***d* are connected with bridges **308***a*, **308***b*, **308***c*, **308***d*, and **308***e*, which are formed on the second metal layer.

Both the primary winding **302** and the secondary winding **306** have a center tap **310**, **312** connected to the outermost portion of the BALUN **306**. For example, primary inductor **302** has a center tap **310** connected to winding segment **302***c* located at the outer portion of the BALUN **300**, and center tap **312** is connected to winding segment **306***c* located at the outer part of BALUN **300**. The configuration of BALUN **300** shown in FIG. **3** enables the BALUN **300** to be formed on only two metal layers thereby reducing the number of metal layers and masking steps needed to create the BALUN. Additionally, locating the center taps at the exterior of the BALUN **300** decreases the current density in center taps **310**, **312**, which in turn reduces the likelihood of electromigration. Accordingly, as the likelihood of electromigration decreases, the reliability of the BALUN **300** increases.

FIG. **4** illustrates one example of a BALUN **400** having a 2:3 turn ratio. Features in FIG. **4** which are identical to those in FIG. **2** are identified by having reference numerals with the same two least significant digits as the features in FIG. **2**, but increased by 200. As shown in FIG. **4**, BALUN **400** has a primary winding **402** comprising a plurality of winding segments **402***a*, **402***b*, **402***c*, and **402***d* formed on a first metal layer connected by a metal bridges **404***a*, **404***b*, **404***c*, **404***d*, and **404***e* formed on a second metal layer. BALUN **400** also includes a secondary winding **406** comprising a plurality of winding segments **406***a*, **406***b*, **406***c*, **406***d*, and **406***e* formed on the same metal layer as primary winding **402**. The windings segments **406***a*-**404***e* of secondary winding **406** are con-

nected by metal bridges **408***a*, **408***b*, **408***c*, and **408***d*, which are formed on the same metal layer as metal bridges **404***a*-**404***e* that connected primary winding **402**. BALUN **400** also includes a center tap **410** connected to primary winding segment **402***c* located at the outer-most portion of the BALUN **400**.

In addition to having different turn ratios, transformers and BALUNS in accordance with the present disclosure may include windings having a non-integer number of turns. For example, FIG. **5** illustrates a BALUN device **500** having a turn ratio of 1.75:3. Features in FIG. **5** which are identical to those in FIG. **2** are identified by having reference numerals with the same two least significant digits as the features in FIG. **2**, but increased by 300. As shown in FIG. **5**, primary winding **502** includes a plurality of winding segments **502***a*, **502***b*, **502***c*, and **502***d* formed on a first metal layer connected by metal bridges **504***a*, **504***b*, **504***c*, **504***d*, and **504***e* formed on a second metal layer. The primary winding **502** makes a total of 1.75 turns and has its ports **504***a*, **504***e* located at an angle of 90 degrees from one another.

Secondary winding **506** also includes a plurality of winding segments **506***a*, **506***b*, **506***c*, **506***d*, and **506***e* formed on the same metal layer as primary winding **502**. The winding segments **506***a*-**506***e* are connected by metal bridges **508***a*, **508***b*, **508***c*, and **508***d*, which are formed on the same metal layer as metal bridges **504***a*-**504***d*. The secondary winding makes three turns and has its two ports located parallel to one another. A center tap **510** is connected to primary winding segment **502***c*, which is at the outer-most portion of the BALUN **500**.

FIG. **6** illustrates another embodiment of a BALUN device **600** having windings with non-integer numbers of turns and non-parallel ports. Features in FIG. **6** which are identical to those in FIG. **5** are identified by having reference numerals with the same two least significant digits as the features in FIG. **5**, but increased by 100. As shown in FIG. **6**, the primary winding **602** of BALUN **600** makes 1.75 turns and the secondary winding **606** makes 2.75 turns. The ports **604***a*, **604***e* of primary winding **602** are disposed at 90 degree angles from one another as are the ports **606***a*, **606***b* for secondary winding **606**.

FIG. **7** illustrates an example of a transformer **700** having a 1.75:1.75 turn ratio and non-parallel ports. Features in FIG. **7** which are identical to those in FIG. **6** are identified by having reference numerals with the same two least significant digits as those in FIG. **6**, but increased by 100. As shown in FIG. **7**, the ports **704***a*, **704***e* of primary winding **702** are disposed at an angle of 90 degrees from one another as are the ports **708***a*, **708***e* of secondary winding **702**. Note that the ports **704***a*, **704***e*, **708***a*, **708***e* of the primary winding **702** and secondary winding **706** may be disposed at angles other than 90 degrees. Examples of such angles include, but are not limited to, 0, 45, 90, 135, and 180 degrees.

FIG. **8** illustrates a BALUN **800** having a turn ratio of 1.75:1.75. Features of BALUN **800** that are similar to features of transformer **700** shown in FIG. **7** are identified with reference numerals having the same two least significant digits and increased by 100. As shown in FIG. **8**, the primary winding **802** of BALUN **800** makes 1.75 turns and includes ports **804***a* and **804***e* which are disposed at an angle of 90 degrees from one another. Similarly, secondary winding **806** makes 1.75 turns and has ports **808***a* and **808***e*, which are located 90 degrees from one another.

In some embodiments, the ports **804***a*, **804***e*, **808***a*, and **808***e* of primary and secondary windings **802**, **806** may be located at angles other than 90 degrees. Examples of angles at which the ports of the primary and secondary windings may be located includes, but are not limited to, 0, 45, 90, 135, and 180. BALUN **800** also includes a center tap **810** connected to primary winding segment **802***c* and a center tap **812** connected to secondary winding segment **806***c*. As shown in FIG. **8**, both of the center taps **810**, **812** are located at the outer-most portions of BALUN **800** which reduces the current density of the center taps in high current applications compared to center taps connected to the center of the BALUN **800**.

In some embodiments, a BALUN or transformer may be formed using three metal layers. FIG. **9**A is a top plan view of a transformer **900** having a 2:2 turn ratio that utilizes three metal layers in accordance with the present disclosure. As shown in FIG. **9**A, transformer **900** includes a primary winding **902** comprising winding segments **902***a*, **902***b*, and **902***c*, which may be formed on a first metal layer **920** and a second metal layer **930**. The primary winding segments **902***a*-**902***c* are connected with bridges **904***a*, **904***b*, and **904***c*, which may be formed on the second metal layer **930**.

Secondary winding **906** is also formed on the first metal layer **920** and second metal layer **930**. Secondary winding segments **906***a*-**906***d* are connected with bridges **908***a*, **908***b*, and **908***c*, which are formed on the second metal layer **930**. The input ports **914***a*, **914***b* for primary winding **902** and input ports **916***a*, **916***b* for secondary winding **906** are formed on a third metal layer **940**. As illustrated in FIGS. **9**B and **9**C, the third metal layer **940** may be formed below the first metal layer **920** and second metal layer **930**.

FIG. **9**C is a cross-sectional view of the transformer **900** illustrated in FIG. **9**A. As shown in FIG. **9**C, the two metal layers **920**, **930** are vertically stacked over one another. In some embodiments, metal layers **920** and **930** are connected by one or more vias **925** formed in a first dielectric layer **970** that separates metal layers **920** and **930**. A third metal layer **940** is formed below the first and second metal layers **920**, **930** in dielectric layer **960**. Examples of dielectric materials suitable for these layers include, but are not limited to, SiO_2, PSG, BPSG, and SiN. In some embodiments, one or more vias **935** may connect the second metal layer **930** and the third metal layer **940**. The second dielectric layer **960** is formed over a guard ring **980**, which is formed over a semiconductor substrate **950**. In some embodiments, the first metal layer **920** has a thickness of approximately one micron, the second metal layer **930** has a thickness of approximately three microns, and the third metal layer **940** has a thickness of approximately 0.7 microns. One skilled in the art will understand that the vertical arrangement and thickness of the first, second, and third metal layers **920**, **930**, and **940** may be varied. Additionally, the metal layers **920**, **930**, **940** on which the primary winding **902**, secondary winding **906**, and the input ports **916***a*, **916***b* are formed may also be varied.

In some embodiments, the transformers and BALUNS enable a reduction in the number of processing steps, as each may be formed using only two metal layers while maintaining high Q-factors. In some embodiments, the transformers and BALUNS have improved reliability as the current density at the center of the devices which in turn reduces the likelihood of electromigration. In some embodiments, the transformers and BALUNS enable the ports of the primary and secondary windings to be located at various angles from one another providing improved flexibility with respect to where the transformers or BALUNS may be located on a chip in relation to other circuits. Additionally, the transformers and BALUNS may include windings with non-integer numbers of turns enabling the voltage to be stepped up or down at various increments using fewer windings and chip space.

Although the invention has been described in terms of exemplary embodiments, it is not limited thereto. Rather, the appended claims should be construed broadly, to include other variants and embodiments of the invention, which may be made by those skilled in the art without departing from the scope and range of equivalents of the invention.

What is claimed is:

1. An electronic device, comprising:

a first winding having a first port and a second port, the first winding formed in a first metal layer formed over a semiconductor substrate; and

a second winding having a third port and a fourth port, the second winding including a plurality of segments formed in the first metal layer, the plurality of winding segments of the second winding connected by a bridge formed at least partially in a second metal layer;

wherein the first and second ports of the first winding are disposed externally of the first and second windings and are directly connected to an innermost portion of the first winding.

2. The electronic device of claim **1**, wherein the first winding includes a plurality of winding segments formed in the first metal layer, the plurality of winding segments of the first winding connected by a second bridge formed at least partially in the second metal layer.

3. The electronic device of claim **1**, wherein the first winding is a primary winding and the second winding is a secondary winding.

4. The electronic device of claim **1**, wherein the third and fourth ports are connected to an innermost portion of the second winding and are disposed externally of the first and second windings.

5. The electronic device of claim **3**, wherein the third and fourth ports are connected to an outer-portion of the second winding.

6. The electronic device of claim **1**, further comprising:

a first center tap connected to a winding segment of the first winding located at an outermost portion of the electronic device.

7. The electronic device of claim **6**, wherein the first center tap is formed in the first metal layer.

8. The electronic device of claim **6**, further comprising:

a second center tap connected to a winding segment of the second winding located at an outermost portion of the electronic device.

9. The electronic device of claim **8**, wherein the second center tap is formed in the first metal layer.

10. The electronic device of claim **1**, wherein the first winding has a non-integer number of turns.

11. The electronic device of claim **1**, wherein the first port is non-parallel with the second port.

12. The electronic device of claim **11**, wherein the third port is non-parallel with the fourth port.

13. The electronic device of claim **1**, wherein the first metal layer has a thickness in a range from approximately one micron to approximately three microns.

14. The electronic device of claim **1**, wherein the second metal layer has a thickness in a range from approximately one micron to approximately three microns.

15. A two metal-layer electronic device, comprising:

a primary winding having a first set of ports, the primary winding including:

a first plurality of winding segments formed in a first metal layer of the two metal layers in which the electronic device is formed over a semiconductor substrate; and

a first plurality of bridges formed in a second metal layer of the two metal layers in which the electronic device is formed, the first plurality of bridges connecting the first plurality of winding segments; and

a secondary winding having a second set of ports, the secondary winding including:

a second plurality of winding segments formed in the first metal layer; and

a second plurality of bridges formed in the second metal layer, the second plurality of bridges connecting the second plurality of winding segments,

wherein the first set of ports are disposed externally of the first and second windings and are directly connected to an innermost portion of the primary winding.

16. The electronic device of claim **1**, wherein the first metal layer is vertically displaced from the second metal layer with a dielectric layer therebetween.

17. The electronic device of claim **15**, further comprising:

a center tap connected to one of the plurality of winding segments of the primary winding, the winding segment to which the center tap is connected located at the outermost portion of the primary winding.

18. The electronic device of claim **17**, further comprising:

a second center tap connected to one of the plurality of winding segments of the secondary winding, the winding segment to which the second center tap is connected located at the outermost portion of the secondary winding.

* * * * *