



US 20040106950A1

(19) **United States**(12) **Patent Application Publication**
Grafton et al.(10) **Pub. No.: US 2004/0106950 A1**(43) **Pub. Date: Jun. 3, 2004**(54) **FULLY THREADED SUTURE ANCHOR
WITH INSERT-MOLDED SUTURE****Related U.S. Application Data**(76) Inventors: **R. Donald Grafton**, Naples, FL (US);
Stephen S. Burkhart, San Antonio, TX
(US)(60) Provisional application No. 60/409,929, filed on Sep.
12, 2002. Provisional application No. 60/409,929,
filed on Sep. 12, 2002.**Publication Classification**Correspondence Address:
**DICKSTEIN SHAPIRO MORIN & OSHINSKY
LLP**
2101 L STREET NW
WASHINGTON, DC 20037-1526 (US)(51) **Int. Cl.⁷** **A61B 17/04**
(52) **U.S. Cl.** **606/232**(57) **ABSTRACT**

A fully threaded, bioabsorbable suture anchor with a suture loop that is disposed internally within the suture anchor. The suture loop is insert-molded into the anchor. The fully threaded design provides improved fixation, while the insert-molded internal suture loop serves as a recessed eyelet for a second (knot-tying) suture.

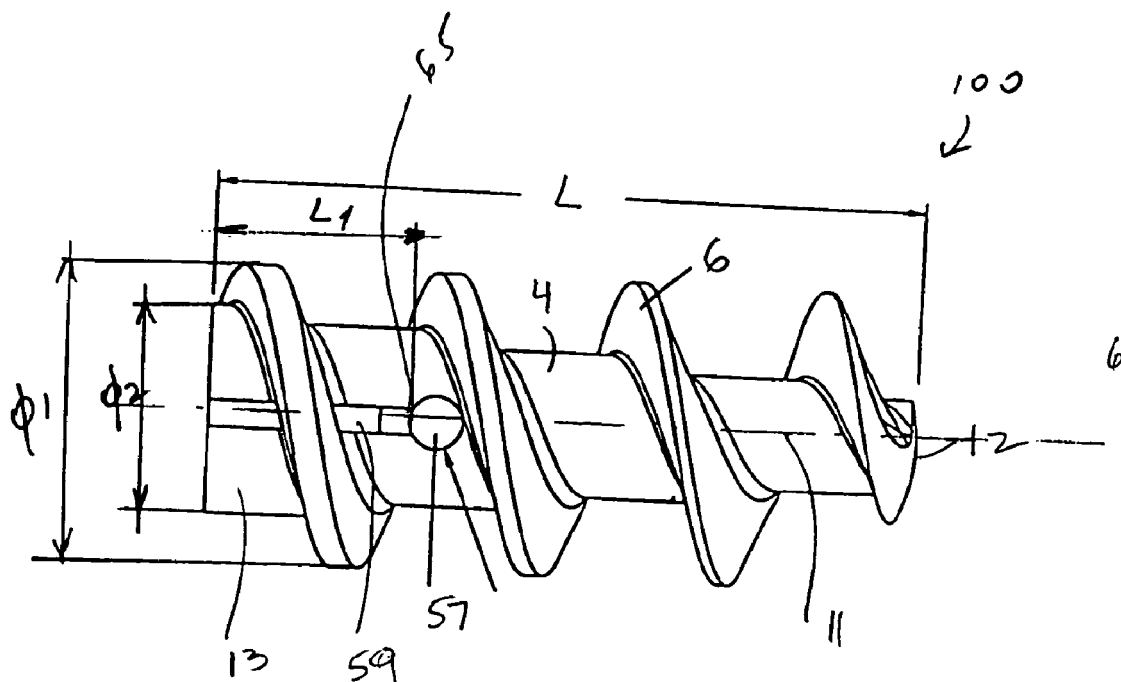
(21) Appl. No.: **10/660,601**(22) Filed: **Sep. 12, 2003**

Figure 1

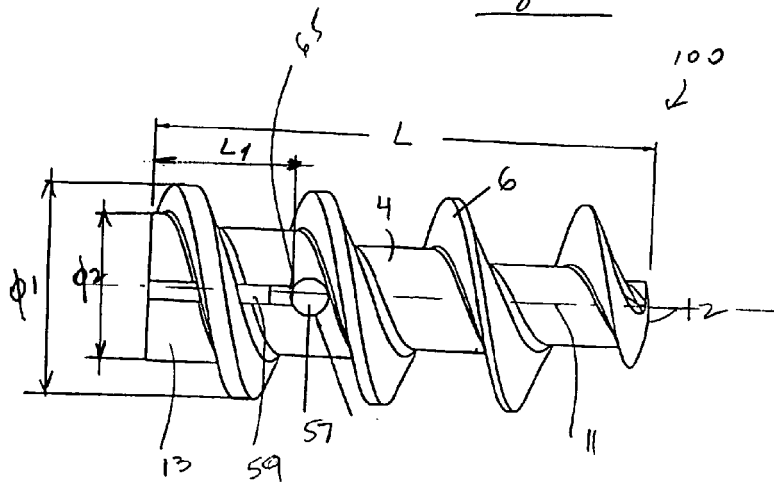


Figure 2




Figure 3

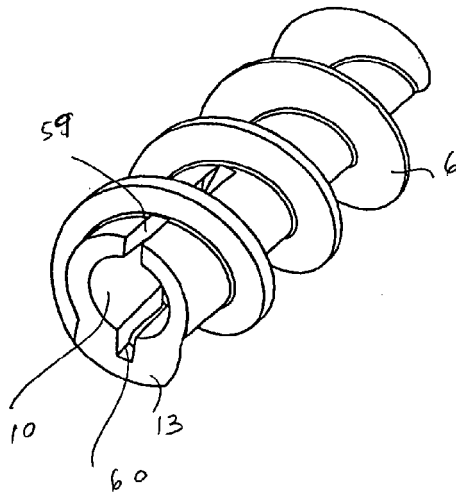


Figure 4

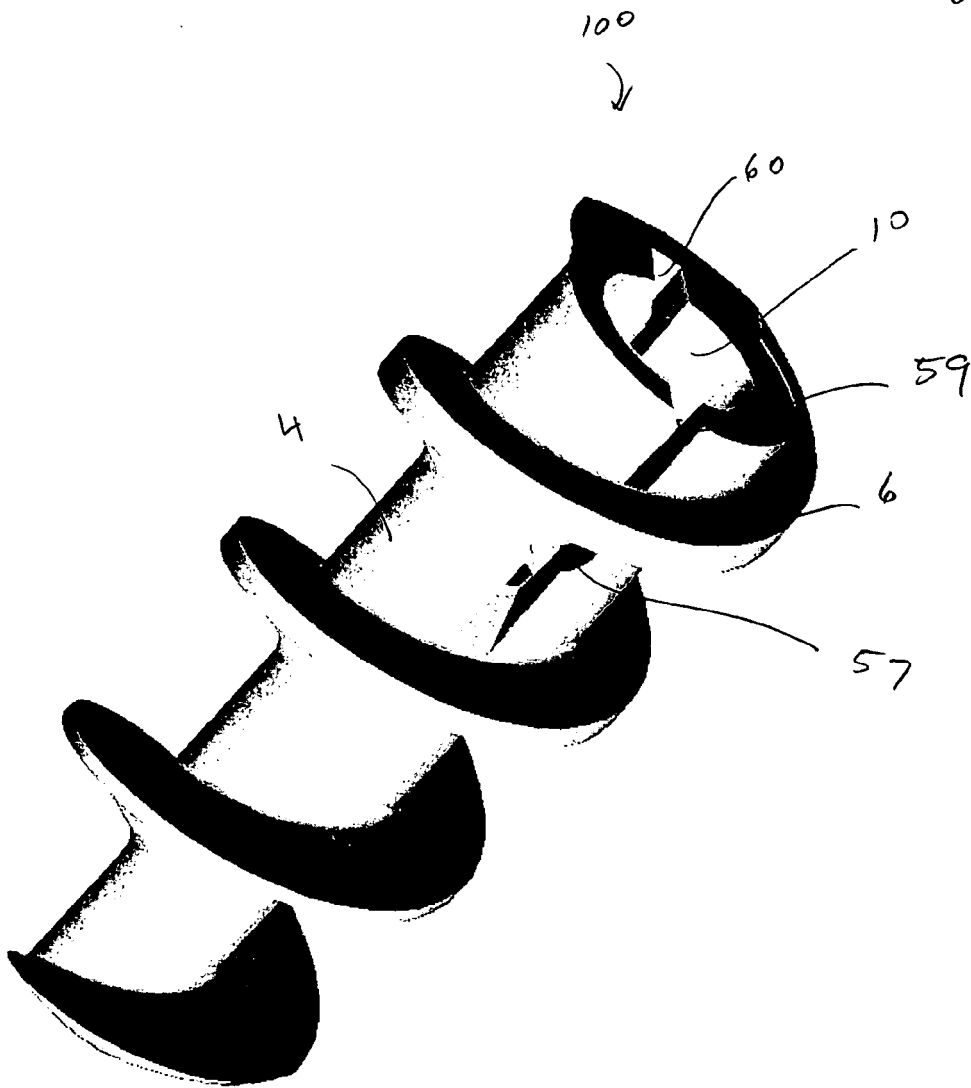


Figure 5

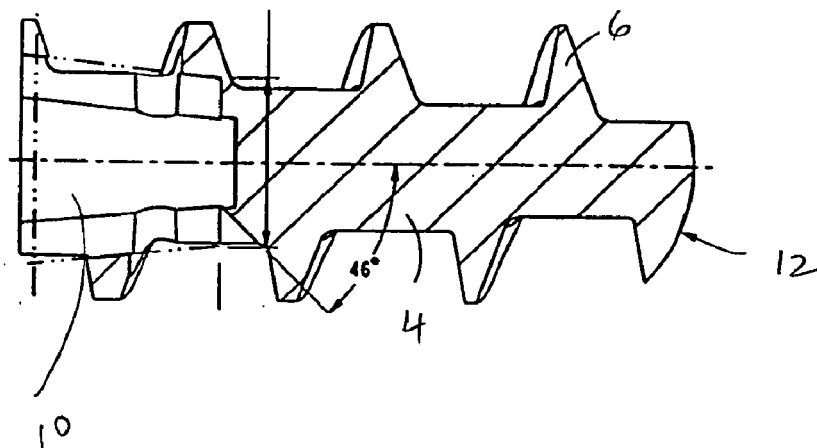


Figure 6

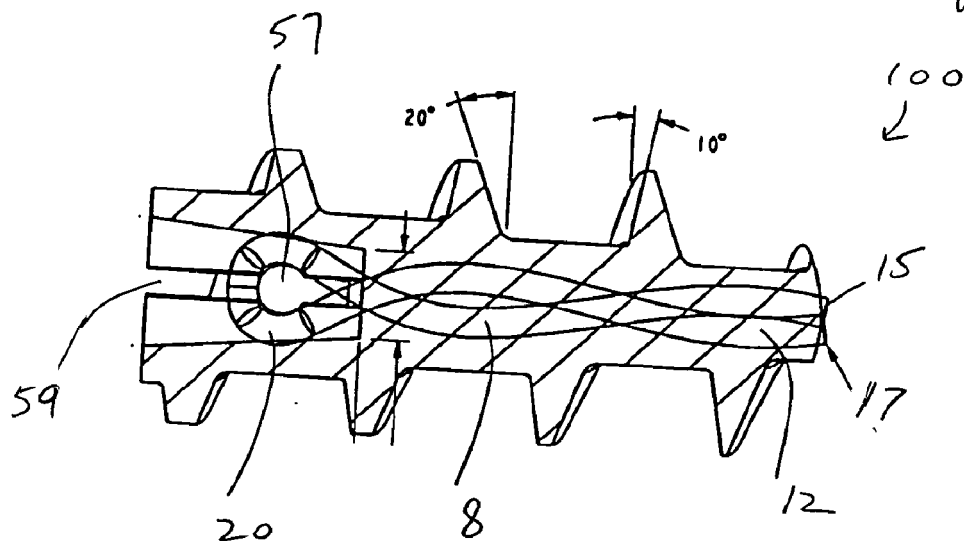


Figure 7

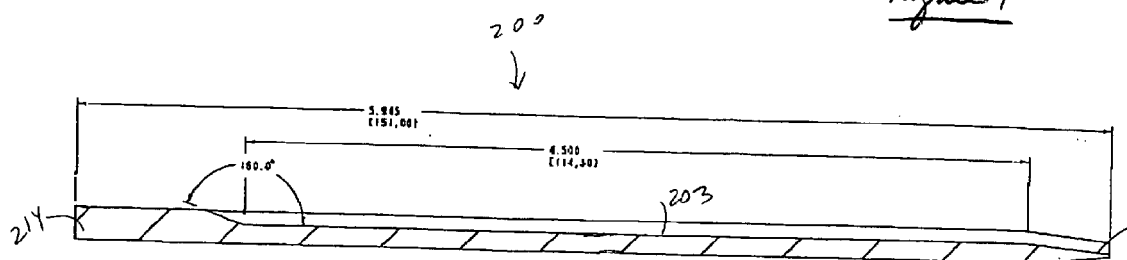


Figure 8

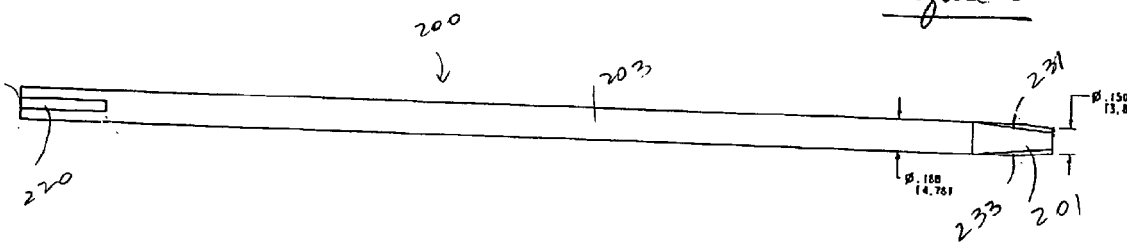


Figure 9

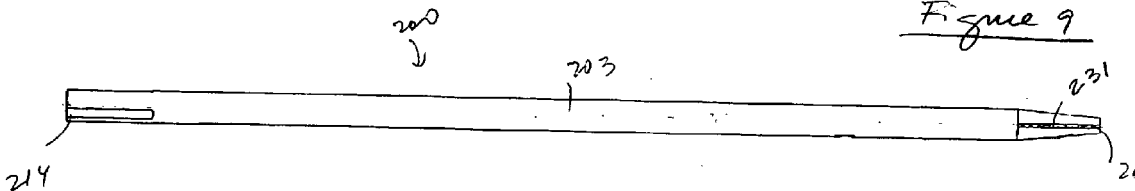


Figure 10





Figure 11

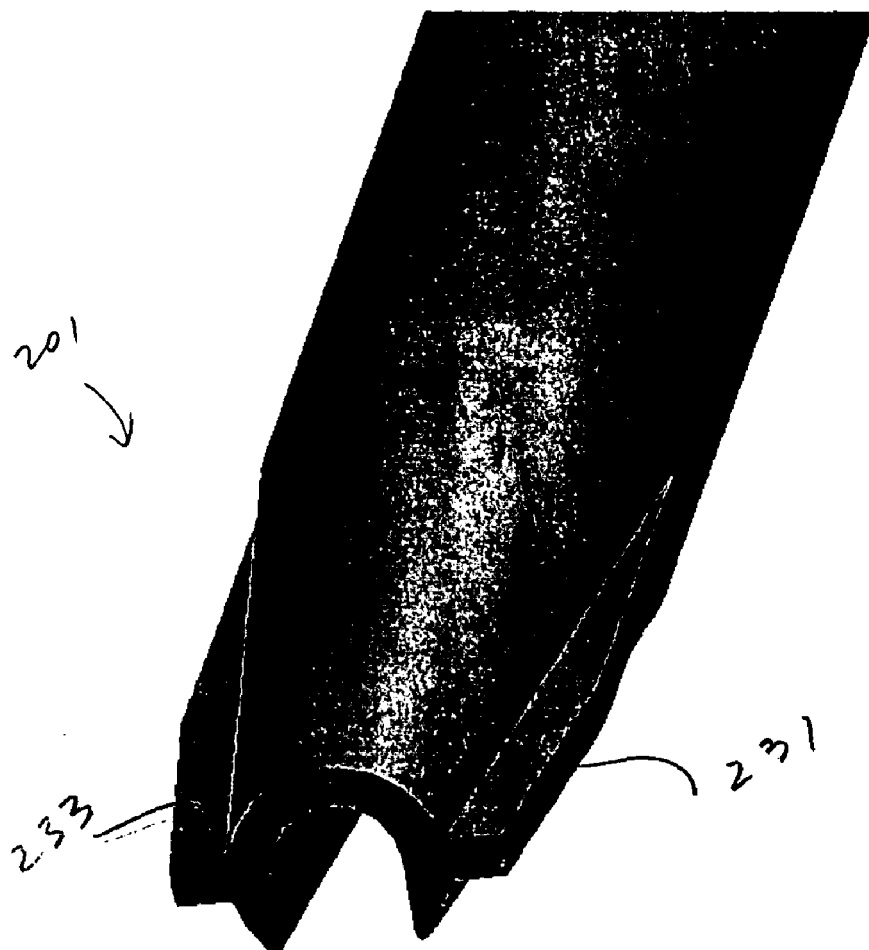

FULLY THREADED SUTURE ANCHOR WITH INSERT-MOLDED SUTURE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application Serial No. 60/409,929, filed Sep. 12, 2002, the entire disclosure of which is incorporated by reference herein.

FIELD OF THE INVENTION

[0002] The present invention relates to an apparatus and method for anchoring surgical suture to bone. More specifically, the present invention relates to arthroscopic apparatus and methods for anchoring suture to bone using a fully-threaded bioabsorbable suture anchor having a suture loop molded directly into the suture anchor.

BACKGROUND OF THE INVENTION

[0003] When soft tissue tears away from bone, reattachment becomes necessary. Various devices, including sutures alone, screws, staples, wedges, and plugs have been used in the prior art to secure soft tissue to bone.

[0004] Recently, various types of threaded suture anchors have been developed for this purpose. Some threaded suture anchors are designed to be inserted into a pre-drilled hole. Other suture anchors are self-tapping.

[0005] U.S. Pat. No. 5,964,783 to Grafton et al., the disclosure of which is incorporated by reference herein, discloses a threaded bioabsorbable suture anchor provided with a loop of suture that is insert-molded directly into the suture anchor during manufacturing. The proximal end of the suture anchor body of the '783 patent is provided with a non-threaded hexagonal drive head. The insert-molded suture preferably extends through the entire length of the suture anchor body and exits through the drive head at the proximal end of the anchor to form a loop of suture external to the suture anchor. In this manner, the suture forming the loop is secured effectively to the threaded suture anchor and is prevented from becoming detached from the anchor. However, because the suture anchor of '783 patent is provided with the non-threaded hexagonal head, the threads of the threaded anchor body do not reach the top of the cortical bone when the suture anchor is installed. Thus, the threaded anchor body tends to move up to the bone surface by at least a distance equal to the length of the non-threaded hexagonal head, such that the drive head may become proud to the surface. Moreover, the suture of the eyelet, which is disposed outside the suture anchor in back of the drive head, may abrade the adjacent tissue.

[0006] Accordingly, a need exists for an improved threaded bioabsorbable suture anchor which is threaded along the entire length of the anchor body, including the drive head, to improve fixation of the anchor in bone. In addition, a need exists for a bioabsorbable suture anchor having a suture loop that does not extend beyond the drive head and does not abrade tissue.

SUMMARY OF THE INVENTION

[0007] The suture anchor of the present invention overcomes disadvantages of the prior art, such as those noted

above, by providing a fully-threaded bioabsorbable suture anchor with an internal drive head at the proximal end of the suture anchor, and having an insert-molded suture loop that is recessed within the proximal end of the suture anchor.

[0008] The insert-molded suture preferably extends through more than half the length of the fully-threaded central body and forms a loop inside a drive socket disposed in the proximal end of the fully-threaded central body. The socket is designed to accept a driver having a drive head with a corresponding geometry and size.

[0009] Other features and advantages of the present invention will become apparent from the following description of the invention, which refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a top view of a fully-threaded suture anchor with insert-molded suture according to the present invention.

[0011] FIG. 2 is a proximal end view of the fully-threaded suture anchor with insert-molded suture of FIG. 1.

[0012] FIG. 3 is a perspective view of the fully-threaded suture anchor with insert-molded suture of FIG. 1.

[0013] FIG. 4 is another perspective view of the fully-threaded suture anchor with insert-molded suture of FIG. 1.

[0014] FIG. 5 is a cross-sectional view of the fully-threaded suture anchor of FIG. 1 without insert-molded suture.

[0015] FIG. 6 is a cross-sectional view of the fully-threaded suture anchor of FIG. 1 with insert-molded suture.

[0016] FIG. 7 is a top view of a driver for the fully-threaded suture anchor with insert-molded suture of FIGS. 1-6 according to the present invention.

[0017] FIG. 8 is another top view of the driver for the fully-threaded suture anchor with insert-molded suture of FIGS. 1-6 according to the present invention.

[0018] FIG. 9 is a top view of the driver of FIG. 8 rotated ninety degrees.

[0019] FIG. 10 is an enlarged proximal end view of the driver of FIG. 8.

[0020] FIG. 11 is an enlarged perspective view of the distal end of the driver of FIG. 8.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0021] In the following detailed description, reference is made to various specific embodiments in which the invention may be practiced. These embodiments are described with sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be employed, and that structural and logical changes may be made without departing from the spirit or scope of the present invention.

[0022] Referring now to the drawings, where like elements are designated by like reference numerals, FIGS. 1-6 illustrate a fully-threaded bioabsorbable suture anchor 100 of the present invention. The fully-threaded suture anchor 100 includes a body 4 provided in the shape of a tapered

cylinder and having a distal end **12** and a proximal end **13**. The fully-threaded suture anchor **100** has a tapered inner diameter ϕ_2 and a constant outer diameter ϕ_1 . As shown in **FIGS. 1, 3 and 4**, the fully-threaded suture anchor **100** is provided with a continuous thread **6** which wraps around the body **4** in a clockwise direction, the crest of the threads tapering from wide to narrow from the proximal to the distal end of the anchor. The proximal threads of anchor **100** with the widest crest surfaces are designed to engage the thin cortical shell in osteopenic bone to prevent anchor "pull back," which could cause the back of the anchor to be proud to the bone.

[0023] The suture anchor **100** is provided with a drive socket **10** (**FIGS. 1-4**) in the shape of a tapered cylinder. Transverse holes **57, 58** (**FIGS. 1, 3 and 4**) for suture loop formation during molding are provided at distal end **65** of the drive socket **10**. Socket **10** includes a pair of slots **59, 60** which mate with corresponding protrusions on a driver, as described in greater detail below. Slots **59, 60** extend from the proximal end **13** of the anchor to holes **57, 58**.

[0024] Referring now to **FIGS. 5 and 6**, a strand of suture **8**, molded into the anchor body **4** during manufacture, extends through the anchor from the distal end **12** of the suture anchor. Suture **8** is molded inside the suture body **4** in the intertwined shape illustrated in **FIG. 6**, to increase the pullout strength of the suture from the anchor body. The suture forms a loop or eyelet **20** located within drive socket **10** at the proximal end **13** of the anchor **100** near the suture hole **57**. The loop **20** is recessed from the proximal end **13** of the anchor body **4** by a distance L_1 (**FIG. 1**) of about one-third the length L of the anchor body **4**. The distance L_1 is greater than about half the length L , more preferably about two-thirds the length L . The large, flexible suture eyelet eliminates the need to precisely orientate the eyelet during anchor insertion to optimize suture sliding characteristics.

[0025] At the distal end **12** of anchor **100**, intertwined suture **8** is preferably trimmed flush to provide a blunt tip **15**. Alternatively, a knot can be formed in suture **8** at the distal end of the anchor to increase the pull out strength of the suture from the anchor. The suture **8** is insert-molded into the anchor in the manner described in U.S. Pat. No. 5,964,783 to Grafton et al., noted above.

[0026] The anchor body **4** is preferably formed of a translucent or transparent polymer material, and is preferably made of bioabsorbable materials such as polyglycolic or polylactic acid polymers. Accordingly, suture **8** is visible through the body of the fully-threaded anchor **100** to provide visual confirmation of suture encapsulation within the anchor. Advantageously, the suture **8** and the anchor body **4** are made of materials selected such that the suture loop **20** will not biodegrade before anchor body **4**.

[0027] **FIGS. 7-11** illustrate an exemplary embodiment of a cannulated driver **200** used to install the fully-threaded suture anchor **100** of the present invention. As illustrated in **FIGS. 7-11**, the driver **200** is cannulated on the side and has a head **201** and a shaft **203**, the head **201** of the driver being configured to be received within anchor socket **10** of the fully-threaded suture anchor **100** of **FIGS. 1-6**. Protruberances **231, 233** (**FIGS. 8, 9 and 11**) are provided on the driver head **201** to engage the slots **59, 60** of anchor socket **10**. The anchor **100** and driver **200** are provided to the surgeon as a preformed assembly with the second (knot

tying) suture pre-threaded through loop **20** and extending through the side cannulation of the driver. The side cannulation (shown as a cannulation on the bottom in **FIG. 11**) allows the second (knot-tying) suture (which is received in the cannulation) to be provided with large needles on the end, which would not be possible if the driver had a central (fully closed) cannulation.

[0028] Suture anchors according to the present invention can be used for arthroscopic procedures. The anchors also are advantageous for open and mini-open surgical procedures. Specific examples of applicable procedures include cortical bone-soft tissue fixation, Bankart and SLAP shoulder repairs. The fully-threaded suture anchor **100** can be made in various sizes, such as a outer diameter of 7.2 mm and an inner diameter which varies between 1.9 mm at the distal end and 4.8 mm at the proximal end, the inner diameter tapering in stepped fashion from the proximal end to the distal end.

[0029] A surgical method employing a fully-threaded suture anchor, such as the fully-threaded suture anchor **100** of **FIGS. 1-6**, generally includes pre-forming a hole for insertion of the anchor using a punch and a tap. The anchor is then engaged with a cannulated driver, such as driver **200** of **FIGS. 7-11**, inserted into the pilot hole and turned to advance the suture anchor into the bone. The driver is then removed, and the suture extending through the internal suture loop **20** can then be manipulated and tied to secure soft tissue to bone.

[0030] Advantageously, when the fully-threaded suture anchor is inserted into bone, it is not necessary for the proximal end of the anchor to be countersunk below the bone surface, as is required with prior art devices to prevent tissue abrasion by the exposed eyelet. Consequently, the anchor of the present invention does not need to be inserted as far as the prior art devices. Further, the internally disposed suture eyelet avoids abrasion of the rim of bone. In addition, because the fully-threaded suture anchor of the present invention is provided with a fully externally threaded body, better fixation in bone is achieved. Finally, the intertwined suture in the present invention provides greater pull-out strength than prior suture anchors.

[0031] Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art.

[0032] The above description and drawings illustrate preferred embodiments which achieve the objects, features and advantages of the present invention. It is not intended that the present invention be limited to the illustrated embodiments. Any modification of the present invention which comes within the spirit and scope of the following claims should be considered part of the present invention.

What is claimed as new and desired to be protected by Letters Patent of the united states is:

1. A suture anchor, comprising:

an anchor body having a proximal end and a distal end; and

a suture loop disposed completely within the anchor body.

2. The suture anchor of claim 1, wherein the suture anchor has a predetermined length and wherein the suture loop is

recessed from the proximal end of the anchor body by about one third of the predetermined length.

3. The suture anchor of claim 1, wherein the anchor body is provided with a drive socket at the proximal end.

4. The suture anchor of claim 4, wherein the drive socket has at least one slot for receiving a corresponding protrusions on a driver head for driving the suture anchor.

5. The suture anchor of claim 5, wherein the slot terminates distally in a suture hole provided within the anchor body.

6. The suture anchor of claim 6, wherein the suture hole is transverse to a longitudinal axis of the anchor body.

7. The suture anchor of claim 1, further comprising a strand of a knot tying suture threaded through the suture loop.

8. The suture anchor of claim 1, wherein the anchor body is threaded from the proximal end to the distal end.

9. The suture anchor of claim 1, wherein the anchor body has a constant outer diameter and a tapered inner diameter.

10. The suture anchor of claim 9, where the taper of the inner diameter is a stepped taper.

11. An insert-molded suture anchor, comprising:

an anchor body having a longitudinal axis, a proximal end and a distal end, the anchor body being threaded between the proximal end and the distal end;

a drive socket provided at the proximal end; and

a suture loop disposed completely within the anchor body, the suture loop being insert-molded into the anchor body.

12. The insert-molded suture anchor of claim 11, wherein the suture loop is recessed from the proximal end of the anchor body by about one third the length of the anchor body.

13. The insert-molded suture anchor of claim 11, wherein the drive socket has at least one slot for receiving a correspondingly shaped protrusion on a driver.

14. The insert-molded suture anchor of claim 11, wherein the anchor thread extending between the proximal end and the distal end of the body has a crest which tapers from wide to narrow from the proximal end to the distal end of the body.

15. The insert-molded suture anchor of claim 11, further comprising a strand of a knot tying suture threaded through the suture loop.

16. The insert-molded suture anchor of claim 13, wherein the anchor body is threaded.

17. The insert-molded suture anchor of claim 11, wherein the threaded anchor body has a substantially constant outer diameter and a tapered inner diameter.

18. The insert-molded suture anchor of claim 17, wherein the taper of the inner diameter is a stepped taper.

* * * * *