

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 10,015,034 B1
APPLICATION NO. : 15/642850
DATED : July 3, 2018
INVENTOR(S) : Steve Shattil

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Specification

Column 1, Line 9:

-- May 19 --

Should be changed to:

-- May 9 --

Signed and Sealed this
Twelfth Day of October, 2021



Drew Hirshfeld
*Performing the Functions and Duties of the
Under Secretary of Commerce for Intellectual Property and
Director of the United States Patent and Trademark Office*

Electronic Patent Application Fee Transmittal				
Application Number:		15642850		
Filing Date:		06-Jul-2017		
Title of Invention:		Spreading and Precoding in OFDM		
First Named Inventor/Applicant Name:		Steve Shattil		
Filer:		Steven J Shattil		
Attorney Docket Number:		CBF-000.C2		
Filed as Small Entity				
Filing Fees for Utility under 35 USC 111(a)				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
CERTIFICATE OF CORRECTION	2811	1	160	160

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				160

Electronic Acknowledgement Receipt	
EFS ID:	43746772
Application Number:	15642850
International Application Number:	
Confirmation Number:	9786
Title of Invention:	Spreading and Precoding in OFDM
First Named Inventor/Applicant Name:	Steve Shattil
Customer Number:	74284
Filer:	Steven J Shattil
Filer Authorized By:	
Attorney Docket Number:	CBF-000.C2
Receipt Date:	13-SEP-2021
Filing Date:	06-JUL-2017
Time Stamp:	13:45:39
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	EFT
Payment was successfully received in RAM	\$ 160
RAM confirmation Number	E20219CD45570106
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Request for Certificate of Correction	sb0044_CBF000C2.pdf	243732	no	2
			8bc426457d49986b0efe2f33ca77f98c851eb515		
Warnings:					
Information:					
2	Request for Certificate of Correction	CBF_000C2_Cert_Correction_CoverLetter.pdf	51007	no	2
			7b77f42e34a77d6217c3e3ca7d1888a69686b14		
Warnings:					
Information:					
3	Fee Worksheet (SB06)	fee-info.pdf	37700	no	2
			cf93341dd970ef5dd31aa2e3bef1c2df3b2d7937		
Warnings:					
Information:					
Total Files Size (in bytes):			332439		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application Number: 15/642,850

Patent Number: 10,015,034

Filing Date: 06-JUL-2017

Inventor: Shattil

Title: "Spreading and Precoding in OFDM"

Atty. Docket No. CBF-000.C2

CERTIFICATE OF CORRECTION

Commissioner for Patents

Office of Data Management Attention: Certificates of Correction Branch

P.O. Box 1450

Alexandria, VA 22313-1450

Dear Sir:

Upon reviewing the above-identified patent, Patentee noted a mistake of a clerical or typographical nature which should be corrected. The mistake occurred in good faith, and its correction does not involve such changes in the patent as would constitute new matter or would require re-examination. The requested correction does not change the Related U.S. Application Data in the above-identified patent.

Transmitted herewith is a proposed Certificate of Correction. Patentee respectfully solicits the granting of the requested Certificate of Correction.

Respectfully submitted,

/Steven J Shattil/

Steven J. Shattil, Reg. No. 40,170

P.O. Box 17355

Boulder, CO 80308-0355

(720) 234-4351

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 10,015,034

APPLICATION NO.: 15/642,850

ISSUE DATE : July 3, 2018

INVENTOR(S) : Steve Shattil

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

col. 1, line 9
-- May 19 --
should be changed to
-- May 9 --

MAILING ADDRESS OF SENDER (Please do not use Customer Number below):

Steven J Shattil
PO Box 17355, Boulder, CO 80308

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 10,015,034 B1
APPLICATION NO. : 15/642850
DATED : July 3, 2018
INVENTOR(S) : Steve Shattil

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Specification

Column 1, Line 15:
--9,042,333--
Should be changed to:
--8,750,264--

Signed and Sealed this
Seventeenth Day of August, 2021



Drew Hirshfeld
*Performing the Functions and Duties of the
Under Secretary of Commerce for Intellectual Property and
Director of the United States Patent and Trademark Office*

Electronic Acknowledgement Receipt	
EFS ID:	43336489
Application Number:	15642850
International Application Number:	
Confirmation Number:	9786
Title of Invention:	Spreading and Precoding in OFDM
First Named Inventor/Applicant Name:	Steve Shattil
Customer Number:	74284
Filer:	Steven J Shattil
Filer Authorized By:	
Attorney Docket Number:	CBF-000.C2
Receipt Date:	24-JUL-2021
Filing Date:	06-JUL-2017
Time Stamp:	16:13:50
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	EFT
Payment was successfully received in RAM	\$ 160
RAM confirmation Number	E20217NG14090357
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Request for Certificate of Correction	sb0044_CBF000C2.pdf	239002	no	2
			577fea24bedf2ba7792b09b52625c1d845b9417d		
Warnings:					
Information:					
2	Transmittal Letter	CBF_000C2_Cert_Correction_CoverLetter.pdf	51008	no	2
			85ce7316e1afe7ba5122cf114ae359ab8c20c73d		
Warnings:					
Information:					
3	Fee Worksheet (SB06)	fee-info.pdf	30154	no	2
			e05936ed547857fcf982fcc6c3e5f4f514bb3024		
Warnings:					
Information:					
Total Files Size (in bytes):			320164		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 10,015,034

APPLICATION NO.: 15/642,850

ISSUE DATE : July 3, 2018

INVENTOR(S) : Steve Shattil

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

col. 1, line 15
-- 9,042,333 --
should be changed to
--8,750,264--

MAILING ADDRESS OF SENDER (Please do not use Customer Number below):

Steven J Shattil
PO Box 17355, Boulder, CO 80308

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application Number: 15/642,850

Patent Number: 10,015,034

Filing Date: 06-JUL-2017

Inventor: Shattil

Title: "Spreading and Precoding in OFDM"

Atty. Docket No. CBF-000.C2

CERTIFICATE OF CORRECTION

Commissioner for Patents

Office of Data Management Attention: Certificates of Correction Branch

P.O. Box 1450

Alexandria, VA 22313-1450

Dear Sir:

Upon reviewing the above-identified patent, Patentee noted a mistake of a clerical or typographical nature which should be corrected. The mistake occurred in good faith, and its correction does not involve such changes in the patent as would constitute new matter or would require re-examination. The requested correction does not change the Related U.S. Application Data in the above-identified patent.

Transmitted herewith is a proposed Certificate of Correction. Patentee respectfully solicits the granting of the requested Certificate of Correction.

Respectfully submitted,

/Steven J Shattil/

Steven J. Shattil, Reg. No. 40,170

P.O. Box 17355

Boulder, CO 80308-0355

(720) 234-4351



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	ISSUE DATE	PATENT NO.	ATTORNEY DOCKET NO.	CONFIRMATION NO.
15/642,850	07/03/2018	10015034	CBF-000.C2	9786
74284	7590	06/13/2018		
Steven J Shattil P.O. Box 17355 Boulder, CO 80308-0355				

ISSUE NOTIFICATION

The projected patent number and issue date are specified above.

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b) (application filed on or after May 29, 2000)

The Patent Term Adjustment is 0 day(s). Any patent to issue from the above-identified application will include an indication of the adjustment on the front page.

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) WEB site (<http://pair.uspto.gov>).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (571)-272-7702. Questions relating to issue and publication fee payments should be directed to the Application Assistance Unit (AAU) of the Office of Data Management (ODM) at (571)-272-4200.

APPLICANT(s) (Please see PAIR WEB site <http://pair.uspto.gov> for additional applicants):

Steve Shattil, Cheyenne, WY;
Genghiscomm Holdings, LLC, Boulder, CO;

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The USA offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to encourage and facilitate business investment. To learn more about why the USA is the best country in the world to develop technology, manufacture products, and grow your business, visit SelectUSA.gov.

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: **Mail** Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
or **Fax** (571)-273-2885

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

74224 7500 05/18/2018
Steven J Shattil
P.O. Box 17355
Boulder, CO 80308-0355

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below.

Steven J Shattil	(Depositor's name)
/Steven J Shattil/	(Signature)
5/22/2018	(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
15/642,850	07/06/2017	Steve Shattil	CBP-000.C2	9786

TITLE OF INVENTION: Spreading and Precoding in OFDM

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEES DUE	DATE DUE
nonprovisional	SMALL	\$500	\$0	\$0	\$500	08/20/2018

EXAMINER	ART UNIT	CLASS-SUBCLASS
LO, DIANE LEE	2466	370-329000

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

- ☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.
☐ "Fee Address" indication (or "Fee Address" indication form PTO/SB/47; Rev 03-02 or more recent) attached. Use of a Customer Number is required.

2. For printing on the patent front page, list

- (1) The names of up to 3 registered patent attorneys or agents OR, alternatively,
(2) The name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

1. Steven J Shattil

2. _____
3. _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document has been filed for recordation as set forth in 37 CFR 3.11. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE

Genghiscomm Holdings, LLC

(B) RESIDENCE (CITY and STATE OR COUNTRY)

Boulder, CO

Please check the appropriate assignee category or categories (will not be printed on the patent): ☐ Individual ☒ Corporation or other private group entity ☐ Government

4a. The following fee(s) are submitted:

- ☒ Issue Fee
☐ Publication Fee (No small entity discount permitted)
☐ Advance Order - # of Copies _____

4b. Payment of Fee(s): (Please first reapply any previously paid issue fee shown above)

- ☐ A check is enclosed.
☒ Payment by credit card. Form PTO-2038 is attached.
☐ The director is hereby authorized to charge the required fee(s), any deficiency, or credits any overpayment, to Deposit Account Number _____ (enclose an extra copy of this form).

5. Change in Entity Status (from status indicated above)

- ☐ Applicant certifying micro entity status. See 37 CFR 1.29
☐ Applicant asserting small entity status. See 37 CFR 1.27
☐ Applicant changing to regular undiscounted fee status.

NOTE: Absent a valid certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.

NOTE: If the application was previously under micro entity status, checking this box will be taken to be a notification of loss of entitlement to micro entity status.

NOTE: Checking this box will be taken to be a notification of loss of entitlement to small or micro entity status, as applicable.

NOTE: This form must be signed in accordance with 37 CFR 1.31 and 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Authorized Signature: /Steven J Shattil/

Date: 5/22/2018

Typed or printed name: Steven J Shattil

Registration No. 40170



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

NOTICE OF ALLOWANCE AND FEE(S) DUE

74284 7590 05/18/2018
Steven J Shattil
P.O. Box 17355
Boulder, CO 80308-0355

EXAMINER

LO, DIANE LEE

ART UNIT

PAPER NUMBER

2466

DATE MAILED: 05/18/2018

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
15/642,850	07/06/2017	Steve Shattil	CBF-000.C2	9786

TITLE OF INVENTION: Spreading and Precoding in OFDM

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	SMALL	\$500	\$0	\$0	\$500	08/20/2018

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE DOES NOT REFLECT A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE IN THIS APPLICATION. IF AN ISSUE FEE HAS PREVIOUSLY BEEN PAID IN THIS APPLICATION (AS SHOWN ABOVE), THE RETURN OF PART B OF THIS FORM WILL BE CONSIDERED A REQUEST TO REAPPLY THE PREVIOUSLY PAID ISSUE FEE TOWARD THE ISSUE FEE NOW DUE.

HOW TO REPLY TO THIS NOTICE:

I. Review the ENTITY STATUS shown above. If the ENTITY STATUS is shown as SMALL or MICRO, verify whether entitlement to that entity status still applies.

If the ENTITY STATUS is the same as shown above, pay the TOTAL FEE(S) DUE shown above.

If the ENTITY STATUS is changed from that shown above, on PART B - FEE(S) TRANSMITTAL, complete section number 5 titled "Change in Entity Status (from status indicated above)".

For purposes of this notice, small entity fees are 1/2 the amount of undiscounted fees, and micro entity fees are 1/2 the amount of small entity fees.

II. PART B - FEE(S) TRANSMITTAL, or its equivalent, must be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted. If an equivalent of Part B is filed, a request to reapply a previously paid issue fee must be clearly made, and delays in processing may occur due to the difficulty in recognizing the paper as an equivalent of Part B.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Maintenance fees are due in utility patents issuing on applications filed on or after Dec. 12, 1980. It is patentee's responsibility to ensure timely payment of maintenance fees when due. More information is available at www.uspto.gov/PatentMaintenanceFees.

PART B - FEE(S) TRANSMITTAL

**Complete and send this form, together with applicable fee(s), to: Mail Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
or Fax (571)-273-2885**

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 5 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Use Block 1 for any change of address)

74284 7590 05/18/2018
Steven J Shattil
P.O. Box 17355
Boulder, CO 80308-0355

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO (571) 273-2885, on the date indicated below.

(Depositor's name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
15/642,850	07/06/2017	Steve Shattil	CBF-000.C2	9786

TITLE OF INVENTION: Spreading and Precoding in OFDM

APPLN. TYPE	ENTITY STATUS	ISSUE FEE DUE	PUBLICATION FEE DUE	PREV. PAID ISSUE FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	SMALL	\$500	\$0	\$0	\$500	08/20/2018

EXAMINER	ART UNIT	CLASS-SUBCLASS
LO, DIANE LEE	2466	370-329000

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

- ☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.
- ☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list

- (1) The names of up to 3 registered patent attorneys or agents OR, alternatively, 1 _____
- (2) The name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed. 2 _____
- 3 _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. If an assignee is identified below, the document has been filed for recordation as set forth in 37 CFR 3.11. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE

(B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent) : ☐ Individual ☐ Corporation or other private group entity ☐ Government

4a. The following fee(s) are submitted:

- ☐ Issue Fee
- ☐ Publication Fee (No small entity discount permitted)
- ☐ Advance Order - # of Copies _____

4b. Payment of Fee(s): (Please first reapply any previously paid issue fee shown above)

- ☐ A check is enclosed.
- ☐ Payment by credit card. Form PTO-2038 is attached.
- ☐ The director is hereby authorized to charge the required fee(s), any deficiency, or credits any overpayment, to Deposit Account Number _____ (enclose an extra copy of this form).

5. Change in Entity Status (from status indicated above)

- ☐ Applicant certifying micro entity status. See 37 CFR 1.29
- ☐ Applicant asserting small entity status. See 37 CFR 1.27
- ☐ Applicant changing to regular undiscounted fee status.

NOTE: Absent a valid certification of Micro Entity Status (see forms PTO/SB/15A and 15B), issue fee payment in the micro entity amount will not be accepted at the risk of application abandonment.

NOTE: If the application was previously under micro entity status, checking this box will be taken to be a notification of loss of entitlement to micro entity status.

NOTE: Checking this box will be taken to be a notification of loss of entitlement to small or micro entity status, as applicable.

NOTE: This form must be signed in accordance with 37 CFR 1.31 and 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Authorized Signature _____

Date _____

Typed or printed name _____

Registration No. _____

Notice of Allowability	Application No. 15/642,850	Applicant(s) SHATTIL, STEVE	
	Examiner DIANE LO	Art Unit 2466	AIA (First Inventor to File) Status No

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☒ This communication is responsive to amendment filed 04/03/2018.
☐ A declaration(s)/affidavit(s) under **37 CFR 1.130(b)** was/were filed on _____.

2. ☐ An election was made by the applicant in response to a restriction requirement set forth during the interview on _____; the restriction requirement and election have been incorporated into this action.

3. ☒ The allowed claim(s) is/are 27-50. As a result of the allowed claim(s), you may be eligible to benefit from the **Patent Prosecution Highway** program at a participating intellectual property office for the corresponding application. For more information, please see http://www.uspto.gov/patents/init_events/pph/index.jsp or send an inquiry to PPHfeedback@uspto.gov.

4. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
Certified copies:
a) ☐ All b) ☐ Some *c) ☐ None of the:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).
* Certified copies not received: _____.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.
THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

5. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date _____.
Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).

6. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

1. ☐ Notice of References Cited (PTO-892)	5. ☐ Examiner's Amendment/Comment
2. ☐ Information Disclosure Statements (PTO/SB/08), Paper No./Mail Date _____	6. ☒ Examiner's Statement of Reasons for Allowance
3. ☐ Examiner's Comment Regarding Requirement for Deposit of Biological Material	7. ☐ Other _____
4. ☐ Interview Summary (PTO-413), Paper No./Mail Date _____	

/DIANE LO/ Primary Examiner, Art Unit 2466	
---	--

REASONS FOR ALLOWANCE

The following is an examiner's statement of reasons for allowance:

The closest prior arts on record fail to teach "generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the spread symbols, wherein the transform precoder generates the plurality of orthogonal spreading codes to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the transform precoder and the multiple access resource mapper is configured to weight each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition " in conjunction with all disclosed steps of functions or all disclosed structures performing corresponding functions in claims 27, 35, and 44.

Any comments considered necessary by applicant must be submitted no later than the payment of the issue fee and, to avoid processing delays, should preferably accompany the issue fee. Such submissions should be clearly labeled "Comments on Statement of Reasons for Allowance".

Conclusion

Any inquiry concerning this communication or earlier communications from the examiner should be directed to DIANE LO whose telephone number is (571)270-1952. The examiner can normally be reached on Monday to Friday, 8:00 am-4:30 pm EST.

Examiner interviews are available via telephone, in-person, and video conferencing using a USPTO supplied web-based collaboration tool. To schedule an interview, applicant is encouraged to use the USPTO Automated Interview Request (AIR) at <http://www.uspto.gov/interviewpractice>.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Faruk Hamza can be reached on (571)272-7969. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/DIANE LO/
Primary Examiner, Art Unit 2466

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Appn. Number: 15642850

Filing Date: 07/06/2017

Inventor: Shattil

Examiner: LO, DIANE LEE

G.A.U.: 2466

Atty. Docket No. CBF-000.C2

OFFICE ACTION RESPONSE

Boulder, CO 80308

April 3, 2018

Commissioner of Patents

PO Box 1450

Alexandria, Virginia 22313-1450

Dear Sir:

This letter is responsive to the Office Letter mailed on 3/29/2018.

The listing of the Claims of Record begins on page 2 of this paper. Remarks begin on page 9 of this paper.

Claims

The following is a complete list of all claims in this application.

Claims 1 – 26 (Cancelled).

27. (Previously presented) An apparatus, comprising:

a transform precoder operable to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

a multiple access resource mapper responsive to an assignment of spectrum resources to the apparatus for selecting a plurality of orthogonal frequency division multiplexing (OFDM) subcarriers corresponding to at least one OFDM symbol interval; and

a signal generator operable to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the spread symbols, wherein the transform precoder generates the plurality of orthogonal spreading codes to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the transform precoder and the multiple access resource mapper is configured to weight each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

28. (Previously presented) The apparatus recited in Claim 27, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

29. (Previously presented) The apparatus recited in Claim 27, wherein the transform precoder is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.
30. (Previously presented) The apparatus recited in Claim 27, wherein the multiple access resource mapper is configured to select the plurality of OFDM subcarriers according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
31. (Previously presented) The apparatus recited in Claim 27, wherein the signal generator is operable to perform an inverse fast Fourier transform.
32. (Previously presented) The apparatus recited in Claim 27, wherein the superposition comprises a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

33. (Previously presented) The apparatus recited in Claim 27, further comprising a modulator configured to form each of the plurality of data symbols from a plurality of data bits.

34. (Previously presented) The apparatus recited in Claim 33, further comprising a pseudo-noise scrambler configured to encode the plurality of data bits with a pseudo-noise code.

35. (Previously presented) A method for communication, performed by at least one processor, comprising:

spreading a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and

generating an OFDM signal comprising a superposition of the plurality of OFDM subcarriers, each modulated by one of the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of spreading and selecting provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

36. (Previously presented) The method recited in Claim 35, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

37. (Previously presented) The method recited in Claim 35, wherein the spreading is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.
38. (Previously presented) The method recited in Claim 35, wherein selecting the plurality of OFDM subcarriers is performed with respect to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
39. (Previously presented) The method recited in Claim 35, wherein generating the OFDM signal comprises performing an inverse fast Fourier transform on the plurality of spread symbols.
40. (Previously presented) The method recited in Claim 35, wherein the superposition comprises a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor}^{\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor - 1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL} N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL} N_{sc}^{RB} / 2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l , wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

41. (Previously presented) The method recited in Claim 35, wherein each of the plurality of data symbols is generated from a plurality of data bits, the plurality of data bits having been encoded with a pseudo-noise code.

42. (Previously presented) An at least one processor configured to perform the method recited in Claim 35.

43. (Previously presented) A User Equipment configured to perform the method recited in Claim 35.

44. (Previously presented) A non-transitory computer-readable medium having computer executable program code stored thereon, the computer executable program code comprising:
program code to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;
program code responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, for selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and
program code to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the program code to spread and the program code responsive to the assignment provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

45. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

46. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, wherein the program code to spread is configured to segment the plurality of data symbols into a plurality of blocks and process each of the plurality of blocks with a DFT.
47. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, wherein the program code responsive to the assignment is configured to perform according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
48. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, wherein the program code to generate the OFDM signal is configured to provide for performing an inverse fast Fourier transform on the plurality of spread symbols.
49. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, wherein the superposition is processed to provide a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

50. (Previously presented) The non-transitory computer-readable medium recited in Claim 44, further comprising program code to generate the plurality of data symbols from a plurality of

data bits, and program code to generate the plurality of data bits by encoding a first plurality of data bits with a pseudo-noise code.

Remarks – Claims

Claims 27-50 are pending.

No amendment to the claims was made.

Remarks – Examination Report

Applicant has carefully reviewed the office action mailed on 3/29/2018. Applicant thanks the Examiner for the careful consideration given to this application. Reconsideration and allowance of the present application is now respectfully requested in view of the following remarks.

Double Patenting

Claims 27-50 were rejected on the ground of non-statutory double patenting with respect to U.S. Patent No. 9,800,448.

An eTerminal Disclaimer in compliance with 37 CFR 1.321 was filed on 4/3/2018 to overcome the double patenting rejections.

Conclusion

Applicant thanks the Examiner for the careful consideration given to this application.

If the Examiner finds any remaining impediments to the prompt allowance of these claims that could be clarified with a telephone call, the Examiner is respectfully requested to initiate the same with the undersigned.

Respectfully submitted,

/Steven J Shattil/

Steven J. Shattil, Reg. No. 40,170
P.O. Box 17355
Boulder, CO 80308-0355
(720) 234-4351

Electronic Acknowledgement Receipt	
EFS ID:	32232163
Application Number:	15642850
International Application Number:	
Confirmation Number:	9786
Title of Invention:	Spreading and Precoding in OFDM
First Named Inventor/Applicant Name:	Steve Shattil
Customer Number:	74284
Filer:	Steven J Shattil
Filer Authorized By:	
Attorney Docket Number:	CBF-000.C2
Receipt Date:	03-APR-2018
Filing Date:	06-JUL-2017
Time Stamp:	14:00:32
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment		no			
File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Amendment/Req. Reconsideration-After Non-Final Reject	CBF_000C2_OA01_resp.pdf	227224 fbfcb6dd5a5504a33fadb59af0d3bc440cd0d97c	no	10
Warnings:					

Information:	
Total Files Size (in bytes):	227224
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.	

Doc Code: DIST.E.FILE Document Description: Electronic Terminal Disclaimer - Filed		PTO/SB/26 U.S. Patent and Trademark Office Department of Commerce	
Electronic Petition Request	TERMINAL DISCLAIMER TO OBIATE A DOUBLE PATENTING REJECTION OVER A "PRIOR" PATENT		
Application Number	15642850		
Filing Date	06-Jul-2017		
First Named Inventor	Steve Shattil		
Attorney Docket Number	CBF-000.C2		
Title of Invention	Spreading and Precoding in OFDM		
☒ Filing of terminal disclaimer does not obviate requirement for response under 37 CFR 1.111 to outstanding Office Action ☒ This electronic Terminal Disclaimer is not being used for a Joint Research Agreement.			
Owner		Percent Interest	
Genghiscomm Holdings, LLC		100%	
The owner(s) with percent interest listed above in the instant application hereby disclaims, except as provided below, the terminal part of the statutory term of any patent granted on the instant application which would extend beyond the expiration date of the full statutory term of prior patent number(s) 9800448 as the term of said prior patent is presently shortened by any terminal disclaimer. The owner hereby agrees that any patent so granted on the instant application shall be enforceable only for and during such period that it and the prior patent are commonly owned. This agreement runs with any patent granted on the instant application and is binding upon the grantee, its successors or assigns. In making the above disclaimer, the owner does not disclaim the terminal part of the term of any patent granted on the instant application that would extend to the expiration date of the full statutory term of the prior patent, "as the term of said prior patent is presently shortened by any terminal disclaimer," in the event that said prior patent later: - expires for failure to pay a maintenance fee; - is held unenforceable; - is found invalid by a court of competent jurisdiction; - is statutorily disclaimed in whole or terminally disclaimed under 37 CFR 1.321; - has all claims canceled by a reexamination certificate; - is reissued; or - is in any manner terminated prior to the expiration of its full statutory term as presently shortened by any terminal disclaimer. ☒ Terminal disclaimer fee under 37 CFR 1.20(d) is included with Electronic Terminal Disclaimer request.			

☐ I certify, in accordance with 37 CFR 1.4(d)(4), that the terminal disclaimer fee under 37 CFR 1.20(d) required for this terminal disclaimer has already been paid in the above-identified application.	
Applicant claims the following fee status:	
☒ Small Entity ☐ Micro Entity ☐ Regular Undiscounted	
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.	
THIS PORTION MUST BE COMPLETED BY THE SIGNATORY OR SIGNATORIES	
I certify, in accordance with 37 CFR 1.4(d)(4) that I am:	
☐ An attorney or agent registered to practice before the Patent and Trademark Office who is of record in this application Registration Number _____	
☒ A sole inventor	
☐ A joint inventor; I certify that I am authorized to sign this submission on behalf of all of the inventors as evidenced by the power of attorney in the application	
☐ A joint inventor; all of whom are signing this request	
Signature	/Steve Shattil/
Name	Steve Shattil

*Statement under 37 CFR 3.73(b) is required if terminal disclaimer is signed by the assignee (owner).
 Form PTO/SB/96 may be used for making this certification. See MPEP § 324.

Electronic Patent Application Fee Transmittal				
Application Number:		15642850		
Filing Date:		06-Jul-2017		
Title of Invention:		Spreading and Precoding in OFDM		
First Named Inventor/Applicant Name:		Steve Shattil		
Filer:		Steven J Shattil		
Attorney Docket Number:		CBF-000.C2		
Filed as Small Entity				
Filing Fees for Utility under 35 USC 111(a)				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
STATUTORY OR TERMINAL DISCLAIMER	2814	1	160	160
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				160

Doc Code: DISQ.E.FILE

Document Description: Electronic Terminal Disclaimer – Approved

Application No.: 15642850

Filing Date: 06-Jul-2017

Applicant/Patent under Reexamination: Shattil

Electronic Terminal Disclaimer filed on April 3, 2018

☒ APPROVED

This patent is subject to a terminal disclaimer

☐ DISAPPROVED

Approved/Disapproved by: Electronic Terminal Disclaimer automatically approved by EFS-Web

U.S. Patent and Trademark Office

Electronic Acknowledgement Receipt	
EFS ID:	32231241
Application Number:	15642850
International Application Number:	
Confirmation Number:	9786
Title of Invention:	Spreading and Precoding in OFDM
First Named Inventor/Applicant Name:	Steve Shattil
Customer Number:	74284
Filer:	Steven J Shattil
Filer Authorized By:	
Attorney Docket Number:	CBF-000.C2
Receipt Date:	03-APR-2018
Filing Date:	06-JUL-2017
Time Stamp:	13:12:55
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	\$ 160
RAM confirmation Number	040318INTEFSW13125100
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Terminal Disclaimer-Filed (Electronic)	eTerminal-Disclaimer.pdf	33228	no	2
			9bb2548355429e76a0889637b0279e2332 2c876d		
Warnings:					
Information:					
2	Fee Worksheet (SB06)	fee-info.pdf	30307	no	2
			c1c23f3ecd435d42291bf97d0c98c47db44 34b1d		
Warnings:					
Information:					
Total Files Size (in bytes):			63535		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
15/642,850	07/06/2017	Steve Shattil	CBF-000.C2	9786
74284	7590	03/29/2018	EXAMINER	
Steven J Shattil P.O. Box 17355 Boulder, CO 80308-0355			LO, DIANE LEE	
			ART UNIT	PAPER NUMBER
			2466	
			MAIL DATE	DELIVERY MODE
			03/29/2018	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Office Action Summary	Application No. 15/642,850	Applicant(s) SHATTIL, STEVE	
	Examiner DIANE LO	Art Unit 2466	AIA (First Inventor to File) Status No

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTHS FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

1) ☒ Responsive to communication(s) filed on 07/06/2017.
☐ A declaration(s)/affidavit(s) under **37 CFR 1.130(b)** was/were filed on ____.

2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.

3) ☐ An election was made by the applicant in response to a restriction requirement set forth during the interview on ____; the restriction requirement and election have been incorporated into this action.

4) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims*

5) ☒ Claim(s) 27-50 is/are pending in the application.
5a) Of the above claim(s) ____ is/are withdrawn from consideration.

6) ☐ Claim(s) ____ is/are allowed.

7) ☒ Claim(s) 27-50 is/are rejected.

8) ☐ Claim(s) ____ is/are objected to.

9) ☐ Claim(s) ____ are subject to restriction and/or election requirement.

* If any claims have been determined allowable, you may be eligible to benefit from the **Patent Prosecution Highway** program at a participating intellectual property office for the corresponding application. For more information, please see http://www.uspto.gov/patents/init_events/pph/index.jsp or send an inquiry to PPHfeedback@uspto.gov.

Application Papers

10) ☐ The specification is objected to by the Examiner.

11) ☒ The drawing(s) filed on 07/06/2017 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).

Priority under 35 U.S.C. § 119

12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

Certified copies:

a) ☐ All b) ☐ Some** c) ☐ None of the:

1. ☐ Certified copies of the priority documents have been received.

2. ☐ Certified copies of the priority documents have been received in Application No. ____.

3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

** See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

1) ☒ Notice of References Cited (PTO-892)

2) ☒ Information Disclosure Statement(s) (PTO/SB/08a and/or PTO/SB/08b)
Paper No(s)/Mail Date ____.

3) ☐ Interview Summary (PTO-413)
Paper No(s)/Mail Date. ____.

4) ☐ Other: ____.

DETAILED ACTION

This is response to Application 15/642,850 filed on 07/06/2017 in which claims 27-50 are presented for examination.

Double Patenting

1. The nonstatutory double patenting rejection is based on a judicially created doctrine grounded in public policy (a policy reflected in the statute) so as to prevent the unjustified or improper timewise extension of the “right to exclude” granted by a patent and to prevent possible harassment by multiple assignees. A nonstatutory double patenting rejection is appropriate where the claims at issue are not identical, but at least one examined application claim is not patentably distinct from the reference claim(s) because the examined application claim is either anticipated by, or would have been obvious over, the reference claim(s). See, e.g., *In re Berg*, 140 F.3d 1428, 46 USPQ2d 1226 (Fed. Cir. 1998); *In re Goodman*, 11 F.3d 1046, 29 USPQ2d 2010 (Fed. Cir. 1993); *In re Longi*, 759 F.2d 887, 225 USPQ 645 (Fed. Cir. 1985); *In re Van Ornum*, 686 F.2d 937, 214 USPQ 761 (CCPA 1982); *In re Vogel*, 422 F.2d 438, 164 USPQ 619 (CCPA 1970); and *In re Thorington*, 418 F.2d 528, 163 USPQ 644 (CCPA 1969).

A timely filed terminal disclaimer in compliance with 37 CFR 1.321(c) or 1.321(d) may be used to overcome an actual or provisional rejection based on a nonstatutory

double patenting ground provided the reference application or patent either is shown to be commonly owned with this application, or claims an invention made as a result of activities undertaken within the scope of a joint research agreement. A terminal disclaimer must be signed in compliance with 37 CFR 1.321(b).

The USPTO internet Web site contains terminal disclaimer forms which may be used. Please visit <http://www.uspto.gov/forms/>. The filing date of the application will determine what form should be used. A web-based eTerminal Disclaimer may be filled out completely online using web-screens. An eTerminal Disclaimer that meets all requirements is auto-processed and approved immediately upon submission. For more information about eTerminal Disclaimers, refer to <http://www.uspto.gov/patents/process/file/efs/guidance/eTD-info-I.jsp>.

2. Claims 27 is rejected on the ground of nonstatutory double patenting as being unpatentable over claims 1 and 3 of U.S. Patent No. 9,800,448. Although the claims at issue are not identical, they are not patentably distinct from each other because:

For claim 27, U.S. Patent No. 9,800,448 discloses: an apparatus comprising a transform precoder, a multiple access resource mapper and a signal generator (claim 1 and 3).

Claims 28-34 are rejected because they depend on rejected independent claim 27 above.

3. Claim 35 is rejected on the ground of nonstatutory double patenting as being unpatentable over claims 9 and 11 of U.S. Patent No. 9,800,448. Claims 36-43 are rejected because they depend on rejected independent claim 35 above.

4. Claim 44 is rejected on the ground of nonstatutory double patenting as being unpatentable over claims 18 and 20 of U.S. Patent No. 9,800,448. Claims 45-50 are rejected because they depend on rejected independent claim 44 above.

Conclusion

Any inquiry concerning this communication or earlier communications from the examiner should be directed to DIANE LO whose telephone number is (571)270-1952. The examiner can normally be reached on Monday to Friday, 8:00 am-4:30 pm EST.

Examiner interviews are available via telephone, in-person, and video conferencing using a USPTO supplied web-based collaboration tool. To schedule an interview, applicant is encouraged to use the USPTO Automated Interview Request (AIR) at <http://www.uspto.gov/interviewpractice>.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Faruk Hamza can be reached on (571)272-7969. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR.

Art Unit: 2466

Status information for unpublished applications is available through Private PAIR only.

For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

/DIANE LO/

Primary Examiner, Art Unit 2466

Notice of References Cited	Application/Control No. 15/642,850		Applicant(s)/Patent Under Reexamination SHATTIL, STEVE	
	Examiner DIANE LO		Art Unit 2466	Page 1 of 1

U.S. PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	CPC Classification	US Classification
*	A	US-9,800,448 B1	10-2017	Shattil; Steve	H04L27/2628	1/1
	B	US-				
	C	US-				
	D	US-				
	E	US-				
	F	US-				
	G	US-				
	H	US-				
	I	US-				
	J	US-				
	K	US-				
	L	US-				
	M	US-				

FOREIGN PATENT DOCUMENTS

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	CPC Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

NON-PATENT DOCUMENTS

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a).)
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.

U.S. Patent and Trademark Office
PTO-892 (Rev. 01-2001)

Notice of References Cited

Part of Paper No. 20180322

Docket No. CBF-000.C2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:

Docket No.: CBF-000.C2

Steve Shattil

Confirmation No.:

Application No.:

Group Art Unit:

Filed: 07/06/2017

Examiner:

For: **SPREADING AND PRECODING IN OFDM**

Commissioner for Patents
P.O. BOX 1450
Alexandria, VA 22313-1450

PRELIMINARY AMENDMENT

Sir:

Prior to examination on the merits, please amend the above-identified application as follows.

Amendments to the Specification begin on page 2.

Amendments to the Claims are reflected in the listing of claims which begins on page 4.

Remarks begin on page 11.

AMENDMENTS TO THE SPECIFICATION

Please AMEND the first heading under the title of the invention on page 1 as follows.

-- CROSS REFERENCE TO PRIOR RELATED APPLICATIONS --

Please DELETE the first paragraph of the specification under the first heading on page 1 that that begins with "This application is a Continuation In Part of U.S. Pat. Appl. 14/727,769..." and ends with "...in their entirety."

Please ADD the following first paragraph of the specification under the amended first heading on page 1 as follows.

-- This application is a Continuation of U.S. Pat. Appl. No. 15/489,664, filed April 17, 2017, which is a Continuation of U.S. Pat. Appl. No. 15/149,382, filed May 19, 2016, now U.S. Pat. No. 9,628,231, which is a Continuation-in-Part of U.S. Pat. Appl. No. 14/727,769, filed June 1, 2015, which is a Continuation of U.S. Pat. Appl. No. 14/276,309, filed May 13, 2014, now U.S. Pat. No. 9,048,897, which is a Continuation of U.S. Pat. Appl. No. 12/545,572, filed August 21, 2009, now U.S. Pat. No. 9,042,333, which is a Divisional of U.S. Pat. Appl. No. 11/187,107, filed on July 22, 2005, now U.S. Pat. No. 8,670,390, which claims priority to Provisional Appl. No. 60/598,187, filed August 2, 2004 and is a Continuation In Part of U.S. Pat. Appl. No. 10/145,854, filed on May 14, 2002, all of which are hereby incorporated by reference in their entirety and

Docket No. CBF-000.C2

all of which this application claims priority under at least 35 U.S.C. 120 and/or any other applicable provision in Title 35 of the United States Code. --

AMENDMENTS TO THE CLAIMS

Please **CANCEL** claims 1 - 26 without prejudice or disclaimer.

Please **ADD** new claims 27 - 50 as follows.

The following is a complete list of all claims in this application.

Claims 1 – 26 (Cancelled).

27. (New) An apparatus, comprising:

a transform precoder operable to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

a multiple access resource mapper responsive to an assignment of spectrum resources to the apparatus for selecting a plurality of orthogonal frequency division multiplexing (OFDM) subcarriers corresponding to at least one OFDM symbol interval; and

a signal generator operable to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the spread symbols, wherein the transform precoder generates the plurality of orthogonal spreading codes to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the transform precoder and the multiple access resource mapper is configured to weight each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

28. (New) The apparatus recited in Claim 27, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

29. (New) The apparatus recited in Claim 27, wherein the transform precoder is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.
30. (New) The apparatus recited in Claim 27, wherein the multiple access resource mapper is configured to select the plurality of OFDM subcarriers according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
31. (New) The apparatus recited in Claim 27, wherein the signal generator is operable to perform an inverse fast Fourier transform.
32. (New) The apparatus recited in Claim 27, wherein the superposition comprises a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-\lceil N_{RB}^{UL} N_{sc}^{RB} / 2 \rceil}^{\lceil N_{RB}^{UL} N_{sc}^{RB} / 2 \rceil - 1} a_{k^{(-)}, l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP, l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL} N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL} N_{sc}^{RB} / 2$, $a_{k, l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP, l}$ denotes cyclic prefix

length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

33. (New) The apparatus recited in Claim 27, further comprising a modulator configured to form each of the plurality of data symbols from a plurality of data bits.

34. (New) The apparatus recited in Claim 33, further comprising a pseudo-noise scrambler configured to encode the plurality of data bits with a pseudo-noise code.

35. (New) A method for communication, performed by at least one processor, comprising:

spreading a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and

generating an OFDM signal comprising a superposition of the plurality of OFDM subcarriers, each modulated by one of the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of spreading and selecting provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

36. (New) The method recited in Claim 35, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero

to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

37. (New) The method recited in Claim 35, wherein the spreading is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.
38. (New) The method recited in Claim 35, wherein selecting the plurality of OFDM subcarriers is performed with respect to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
39. (New) The method recited in Claim 35, wherein generating the OFDM signal comprises performing an inverse fast Fourier transform on the plurality of spread symbols.
40. (New) The method recited in Claim 35, wherein the superposition comprises a time-continuous signal $s(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

41. (New) The method recited in Claim 35, wherein each of the plurality of data symbols is generated from a plurality of data bits, the plurality of data bits having been encoded with a pseudo-noise code.
42. (New) An at least one processor configured to perform the method recited in Claim 35.
43. (New) A User Equipment configured to perform the method recited in Claim 35.
44. (New) A non-transitory computer-readable medium having computer executable program code stored thereon, the computer executable program code comprising:
program code to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;
program code responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, for selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and
program code to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the program code to spread and the program code responsive to the assignment provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.
45. (New) The non-transitory computer-readable medium recited in Claim 44, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

46. (New) The non-transitory computer-readable medium recited in Claim 44, wherein the program code to spread is configured to segment the plurality of data symbols into a plurality of blocks and process each of the plurality of blocks with a DFT.

47. (New) The non-transitory computer-readable medium recited in Claim 44, wherein the program code responsive to the assignment is configured to perform according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.

48. (New) The non-transitory computer-readable medium recited in Claim 44, wherein the program code to generate the OFDM signal is configured to provide for performing an inverse fast Fourier transform on the plurality of spread symbols.

49. (New) The non-transitory computer-readable medium recited in Claim 44, wherein the superposition is processed to provide a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical

constant P_i , Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

50. (New) The non-transitory computer-readable medium recited in Claim 44, further comprising program code to generate the plurality of data symbols from a plurality of data bits, and program code to generate the plurality of data bits by encoding a first plurality of data bits with a pseudo-noise code.

REMARKS

By this amendment, claims 1 - 26 are cancelled and claims 27 - 50 are newly added. Accordingly, claims 27 - 50 are currently pending in this application. The independent claims 27, 35, and 44 are rewritten claims 30, 39, and 49 (respectively) from co-pending application no. 15/489,664, which the Office indicated would be allowable if rewritten in independent form including all the limitations of the base claim and any intervening claims (Examination Report mailed 6/23/2017). Applicant respectfully contends that no issue of new matter has been added by this amendment.

If the Examiner believes, for any reason, that personal communication will expedite prosecution of this application, the Examiner is invited to telephone the undersigned at the number provided.

Prompt and favorable consideration of this Reply is respectfully requested.

Respectfully Submitted,

/Steven J Shattil/

Steven Shattil
Reg. No. 40,170

720-234-4351

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:

Docket No.: CBF-000.C2

Steve Shattil

Confirmation No.: 9786

Application No.: 15/642,850

Group Art Unit:

Filed: 07/06/2017

Examiner:

For: **SPREADING AND PRECODING IN OFDM**

Commissioner for Patents

P.O. BOX 1450

Alexandria, VA 22313-1450

RESPONSE TO PRE-EXAM FORMALITIES NOTICE

Sir:

This letter is responsive to the Notice to File Corrected Application Papers mailed on 7/13/2017.

A substitute specification in compliance with 37 CFR 1.52, 1.121(b)(3), and 1.125 is submitted herewith. The Claims and Abstract are not included, as there is no indication that correction of the Claims or Abstract is required.

Since the substitute specification corrects the line spacing indicated in the Notice, no markup of the Specification indicating the correction is possible.

The following corrections to the Specification were made: On Page 44, the line spacing of the third equation was increased. On Pages 51-52, the line spacing of the example software code beginning with “— #include <fftw3.h> —” and ending with “— fftw_free(in); fftw_free(out); } —” was increased.

The corrections to the Specification did not change the page count, so no application size fee is due.

Applicant wishes to note that the corrected Specification is a copy of the original Specification as filed and should be amended in accordance with the instructions in the Preliminary Amendment that was submitted on the application filing date.

Applicant respectfully contends that no issue of new matter has been added in the corrected Specification.

If the Examiner believes, for any reason, that personal communication will expedite prosecution of this application, the Examiner is invited to telephone the undersigned at the number provided.

Prompt and favorable consideration of this Reply is respectfully requested.

Respectfully Submitted,

/Steven J Shattil/

Steven J Shattil

Reg. No. 40,170

720-234-4351

Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Attorney Docket No.</td> <td>CBF-000.C2</td> </tr> <tr> <td>First Named Inventor</td> <td>Shattil</td> </tr> <tr> <td>Title</td> <td>Spreading and Precoding in OFDM</td> </tr> <tr> <td>Express Mail Label No.</td> <td></td> </tr> </table>	Attorney Docket No.	CBF-000.C2	First Named Inventor	Shattil	Title	Spreading and Precoding in OFDM	Express Mail Label No.	
Attorney Docket No.	CBF-000.C2								
First Named Inventor	Shattil								
Title	Spreading and Precoding in OFDM								
Express Mail Label No.									

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450
1. ☒ Fee Transmittal Form (PTO/SB/17 or equivalent) 2. ☒ Applicant asserts small entity status. See 37 CFR 1.27 3. ☐ Applicant certifies micro entity status. See 37 CFR 1.29. Applicant must attach form PTO/SB/15A or B or equivalent. 4. ☒ Specification [Total Pages <u>84</u>] Both the claims and abstract must start on a new page. (See MPEP § 608.01(a) for information on the preferred arrangement) 5. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets <u>14</u>] 6. ☒ Inventor's Oath or Declaration [Total Pages <u>2</u>] (including substitute statements under 37 CFR 1.64 and assignments serving as an oath or declaration under 37 CFR 1.63(e)) a. ☒ Newly executed (original or copy) b. ☐ A copy from a prior application (37 CFR 1.63(d)) 7. ☒ Application Data Sheet * See note below. See 37 CFR 1.76 (PTO/AIA/14 or equivalent) 8. CD-ROM or CD-R in duplicate, large table, or Computer Program (Appendix) ☐ Landscape Table on CD 9. Nucleotide and/or Amino Acid Sequence Submission (if applicable, items a. – c. are required) a. ☐ Computer Readable Form (CRF) b. ☐ Specification Sequence Listing on: i. ☐ CD-ROM or CD-R (2 copies); or ii. ☐ Paper c. ☐ Statements verifying identity of above copies	ACCOMPANYING APPLICATION PAPERS 10. ☐ Assignment Papers (cover sheet & document(s)) Name of Assignee _____ 11. ☐ 37 CFR 3.73(c) Statement ☐ Power of Attorney (when there is an assignee) 12. ☐ English Translation Document (if applicable) 13. ☐ Information Disclosure Statement (PTO/SB/08 or PTO-1449) ☐ Copies of citations attached 14. ☒ Preliminary Amendment 15. ☐ Return Receipt Postcard (MPEP § 503) (Should be specifically itemized) 16. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed) 17. ☐ Nonpublication Request Under 35 U.S.C. 122(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or equivalent. 18. ☐ Other: _____ _____ _____ _____

***Note:** (1) Benefit claims under 37 CFR 1.78 and foreign priority claims under 1.55 **must** be included in an Application Data Sheet (ADS).
 (2) For applications filed under 35 U.S.C. 111, the application must contain an ADS specifying the applicant if the applicant is an assignee, person to whom the inventor is under an obligation to assign, or person who otherwise shows sufficient proprietary interest in the matter. See 37 CFR 1.46(b).

19. CORRESPONDENCE ADDRESS				
☒ The address associated with Customer Number: <u>74284</u> OR ☐ Correspondence address below				
Name				
Address				
City	State	Zip Code		
Country	Telephone	Email		
Signature	/Steven J Shattil/		Date	07/06/2017
Name (Print/Type)	Steven J Shattil		Registration No. (Attorney/Agent)	40170

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Docket No. CBF-000.C2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:

Docket No.: CBF-000.C2

Steve Shattil

Confirmation No.:

Application No.:

Group Art Unit:

Filed: 07/06/2017

Examiner:

For: **SPREADING AND PRECODING IN OFDM**

Commissioner for Patents
P.O. BOX 1450
Alexandria, VA 22313-1450

PRELIMINARY AMENDMENT

Sir:

Prior to examination on the merits, please amend the above-identified application as follows.

Amendments to the Specification begin on page 2.

Amendments to the Claims are reflected in the listing of claims which begins on page 4.

Remarks begin on page 11.

AMENDMENTS TO THE SPECIFICATION

Please AMEND the first heading under the title of the invention on page 1 as follows.

-- CROSS REFERENCE TO PRIOR RELATED APPLICATIONS --

Please DELETE the first paragraph of the specification under the first heading on page 1 that that begins with "This application is a Continuation In Part of U.S. Pat. Appl. 14/727,769..." and ends with "...in their entireties."

Please ADD the following first paragraph of the specification under the amended first heading on page 1 as follows.

-- This application is a Continuation of U.S. Pat. Appl. No. 15/489,664, filed April 17, 2017, which is a Continuation of U.S. Pat. Appl. No. 15/149,382, filed May 19, 2016, now U.S. Pat. No. 9,628,231, which is a Continuation-in-Part of U.S. Pat. Appl. No. 14/727,769, filed June 1, 2015, which is a Continuation of U.S. Pat. Appl. No. 14/276,309, filed May 13, 2014, now U.S. Pat. No. 9,048,897, which is a Continuation of U.S. Pat. Appl. No. 12/545,572, filed August 21, 2009, now U.S. Pat. No. 9,042,333, which is a Divisional of U.S. Pat. Appl. No. 11/187,107, filed on July 22, 2005, now U.S. Pat. No. 8,670,390, which claims priority to Provisional Appl. No. 60/598,187, filed August 2, 2004 and is a Continuation In Part of U.S. Pat. Appl. No. 10/145,854, filed on May 14, 2002, all of which are hereby incorporated by reference in their entireties and

Docket No. CBF-000.C2

all of which this application claims priority under at least 35 U.S.C. 120 and/or any other applicable provision in Title 35 of the United States Code. --

AMENDMENTS TO THE CLAIMS

Please **CANCEL** claims 1 - 26 without prejudice or disclaimer.

Please **ADD** new claims 27 - 50 as follows.

The following is a complete list of all claims in this application.

Claims 1 – 26 (Cancelled).

27. An apparatus, comprising:

a transform precoder operable to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

a multiple access resource mapper responsive to an assignment of spectrum resources to the apparatus for selecting a plurality of orthogonal frequency division multiplexing (OFDM) subcarriers corresponding to at least one OFDM symbol interval; and

a signal generator operable to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the spread symbols, wherein the transform precoder generates the plurality of orthogonal spreading codes to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the transform precoder and the multiple access resource mapper is configured to weight each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

28. The apparatus recited in Claim 27, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

29. The apparatus recited in Claim 27, wherein the transform precoder is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.

30. The apparatus recited in Claim 27, wherein the multiple access resource mapper is configured to select the plurality of OFDM subcarriers according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.

31. The apparatus recited in Claim 27, wherein the signal generator is operable to perform an inverse fast Fourier transform.

32. The apparatus recited in Claim 27, wherein the superposition comprises a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor}^{\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor - 1} a_{k^{(-)}, l} e^{j2\pi(k+1/2)\Delta f(t - N_{CP, l} T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL} N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL} N_{sc}^{RB} / 2$, $a_{k, l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP, l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k, l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

33. The apparatus recited in Claim 27, further comprising a modulator configured to form each of the plurality of data symbols from a plurality of data bits.

34. The apparatus recited in Claim 33, further comprising a pseudo-noise scrambler configured to encode the plurality of data bits with a pseudo-noise code.

35. A method for communication, performed by at least one processor, comprising:
spreading a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;
responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and
generating an OFDM signal comprising a superposition of the plurality of OFDM subcarriers, each modulated by one of the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of spreading and selecting provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

36. The method recited in Claim 35, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

37. The method recited in Claim 35, wherein the spreading is configured to segment the plurality of data symbols into a plurality of blocks, each of the plurality of blocks being processed by a DFT.

38. The method recited in Claim 35, wherein selecting the plurality of OFDM subcarriers is performed with respect to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.

39. The method recited in Claim 35, wherein generating the OFDM signal comprises performing an inverse fast Fourier transform on the plurality of spread symbols.

40. The method recited in Claim 35, wherein the superposition comprises a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

, where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .

41. The method recited in Claim 35, wherein each of the plurality of data symbols is generated from a plurality of data bits, the plurality of data bits having been encoded with a pseudo-noise code.

42. An at least one processor configured to perform the method recited in Claim 35.

43. A User Equipment configured to perform the method recited in Claim 35.

44. A non-transitory computer-readable medium having computer executable program code stored thereon, the computer executable program code comprising:

program code to spread a plurality of data symbols with a plurality of orthogonal spreading codes comprising complex-valued coefficients of a discrete Fourier transform (DFT) to produce a plurality of spread symbols;

program code responsive to an assignment of spectrum resources for use by a transmitter in an orthogonal frequency division multiplexing (OFDM) network, for selecting a plurality of OFDM subcarriers corresponding to at least one OFDM symbol interval; and

program code to generate an OFDM signal comprising a superposition of the plurality of OFDM subcarriers modulated by the plurality of spread symbols, wherein the plurality of orthogonal spreading codes are selected to provide the superposition with a reduced peak-to-average-power ratio; and wherein at least one of the program code to spread and the program code responsive to the assignment provides for multiplying each of the plurality of OFDM subcarriers with an amplitude scaling factor to adjust gain of the superposition.

45. The non-transitory computer-readable medium recited in Claim 44, wherein one of the plurality of spread symbols is expressed by:

$$z(l \cdot M_{sc}^{PUSCH} + k) = \frac{1}{\sqrt{M_{sc}^{PUSCH}}} \sum_{i=0}^{M_{sc}^{PUSCH}-1} d(l \cdot M_{sc}^{PUSCH} + i) e^{-j \frac{2\pi i k}{M_{sc}^{PUSCH}}}$$

wherein M_{sc}^{PUSCH} is a DFT length corresponding to the plurality of orthogonal spreading codes, l is an index spanning 0 to a number of symbol intervals minus one, k is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, i is an index spanning zero to the DFT length M_{sc}^{PUSCH} minus one, $d(i)$ is an i^{th} one of the plurality of data symbols, e is natural log, $j = \sqrt{-1}$, and π is mathematical constant Pi.

46. The non-transitory computer-readable medium recited in Claim 44, wherein the program code to spread is configured to segment the plurality of data symbols into a plurality of blocks and process each of the plurality of blocks with a DFT.
47. The non-transitory computer-readable medium recited in Claim 44, wherein the program code responsive to the assignment is configured to perform according to at least one of a frequency division multiple access scheme, a time division multiple access scheme, a space division multiple access scheme, and a frequency-hopping scheme.
48. The non-transitory computer-readable medium recited in Claim 44, wherein the program code to generate the OFDM signal is configured to provide for performing an inverse fast Fourier transform on the plurality of spread symbols.
49. The non-transitory computer-readable medium recited in Claim 44, wherein the superposition is processed to provide a time-continuous signal $s_l(t)$ in symbol interval l as a function of time t , expressed by:

$$s_l(t) = \sum_{k=-[N_{RB}^{UL}N_{sc}^{RB}/2]}^{[N_{RB}^{UL}N_{sc}^{RB}/2]-1} a_{k^{(-)},l} e^{j2\pi(k+1/2)\Delta f(t-N_{CP,l}T_s)}$$

- , where N_{RB}^{UL} denotes a transmission bandwidth of the signal $s_l(t)$ and N_{sc}^{RB} denotes a number of OFDM subcarriers per unit of transmission bandwidth such that $N_{RB}^{UL}N_{sc}^{RB}$ equals a total number of the OFDM subcarriers in the superposition, k is an index that indicates a range of a summation, $k^{(-)} = k + N_{RB}^{UL}N_{sc}^{RB}/2$, $a_{k,l}$ is a value modulated onto a k^{th} subcarrier in symbol period l , e is natural log, $j = \sqrt{-1}$, π is mathematical constant Pi, Δf denotes subcarrier frequency spacing, $N_{CP,l}$ denotes cyclic prefix length in number of time units T_s for symbol interval l ; wherein $a_{k,l}$ comprises a one of the plurality of code symbols corresponding to a k^{th} subcarrier in symbol period l .
50. The non-transitory computer-readable medium recited in Claim 44, further comprising program code to generate the plurality of data symbols from a plurality of

data bits, and program code to generate the plurality of data bits by encoding a first plurality of data bits with a pseudo-noise code.

REMARKS

By this amendment, claims 1 - 26 are cancelled and claims 27 - 50 are newly added. Accordingly, claims 27 - 50 are currently pending in this application. The independent claims 27, 35, and 44 are rewritten claims 30, 39, and 49 (respectively) from co-pending application no. 15/489,664, which the Office indicated would be allowable if rewritten in independent form including all the limitations of the base claim and any intervening claims (Examination Report mailed 6/23/2017). Applicant respectfully contends that no issue of new matter has been added by this amendment.

If the Examiner believes, for any reason, that personal communication will expedite prosecution of this application, the Examiner is invited to telephone the undersigned at the number provided.

Prompt and favorable consideration of this Reply is respectfully requested.

Respectfully Submitted,

/Steven J Shattil/

Steven Shattil
Reg. No. 40,170

720-234-4351

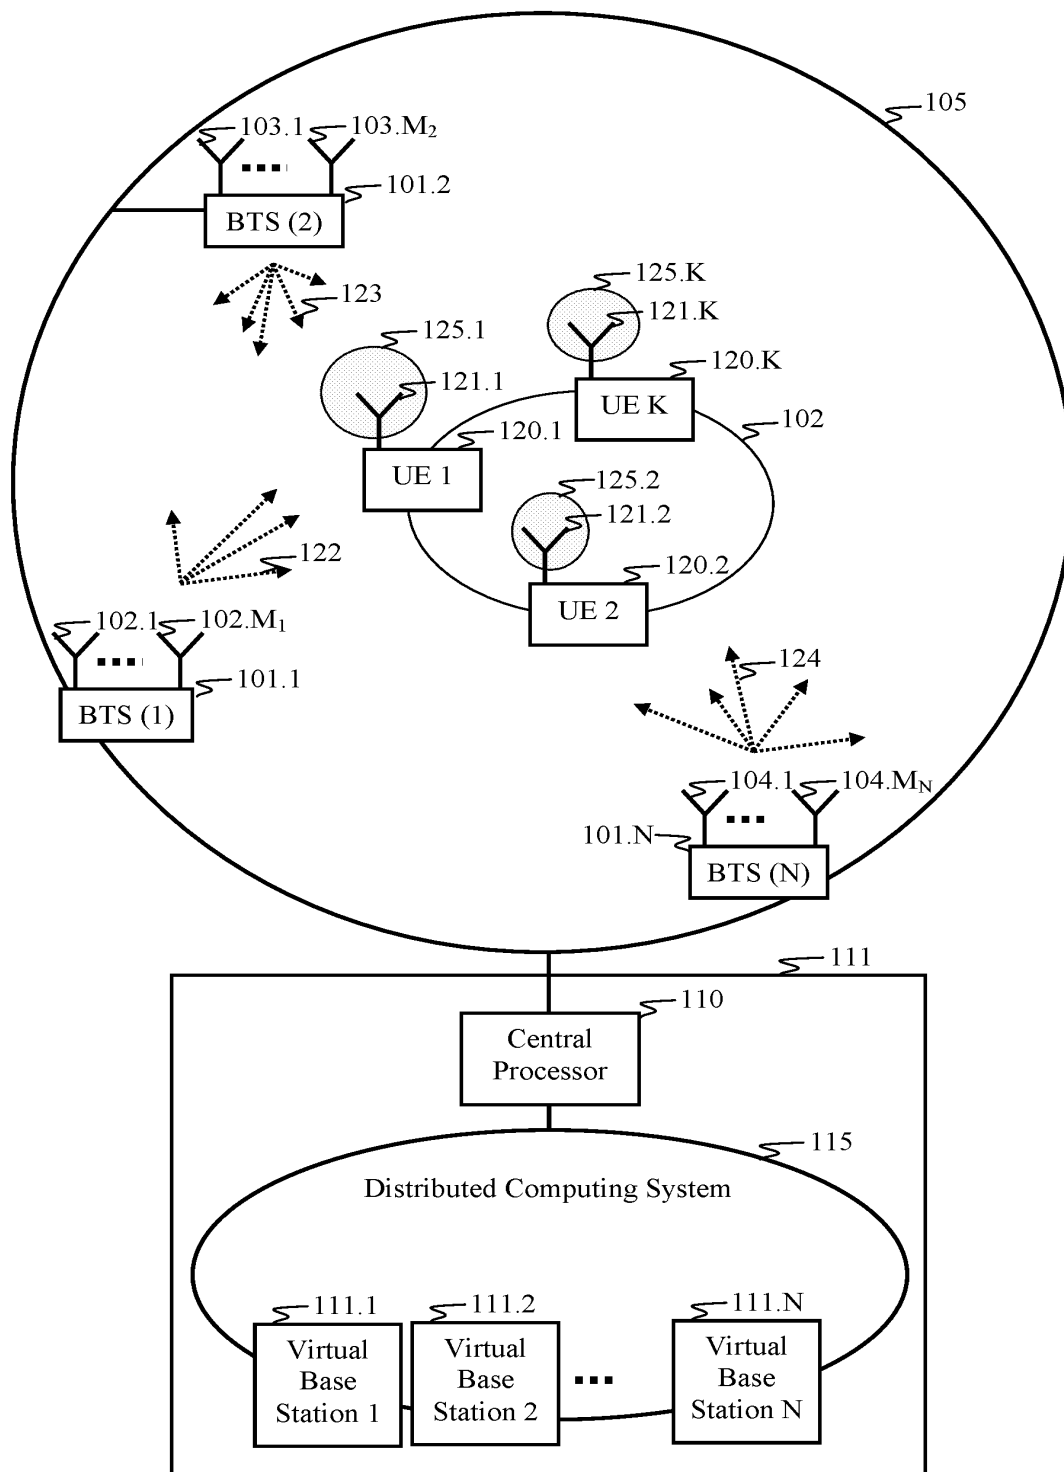


Figure 1

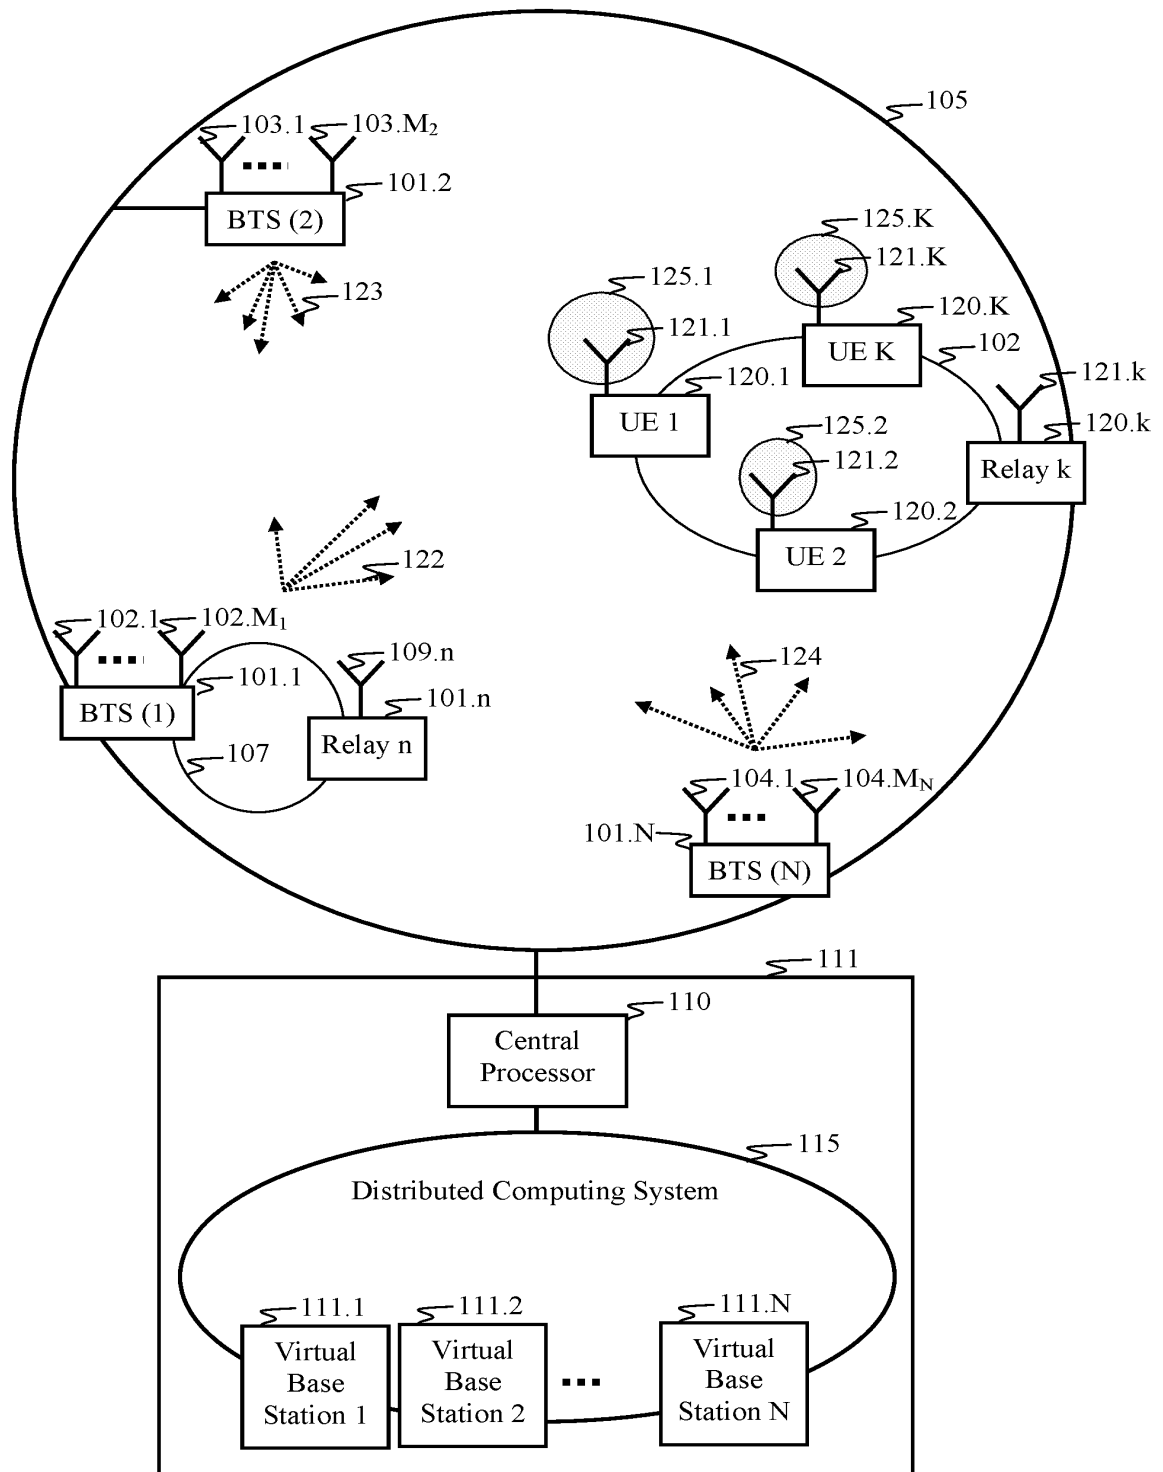


Figure 2



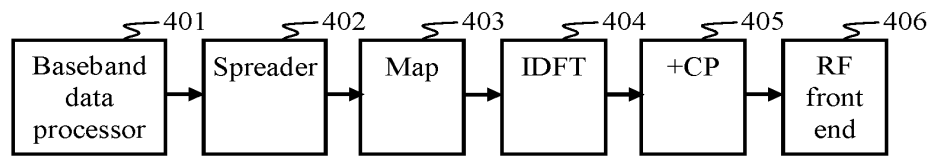


Figure 4A

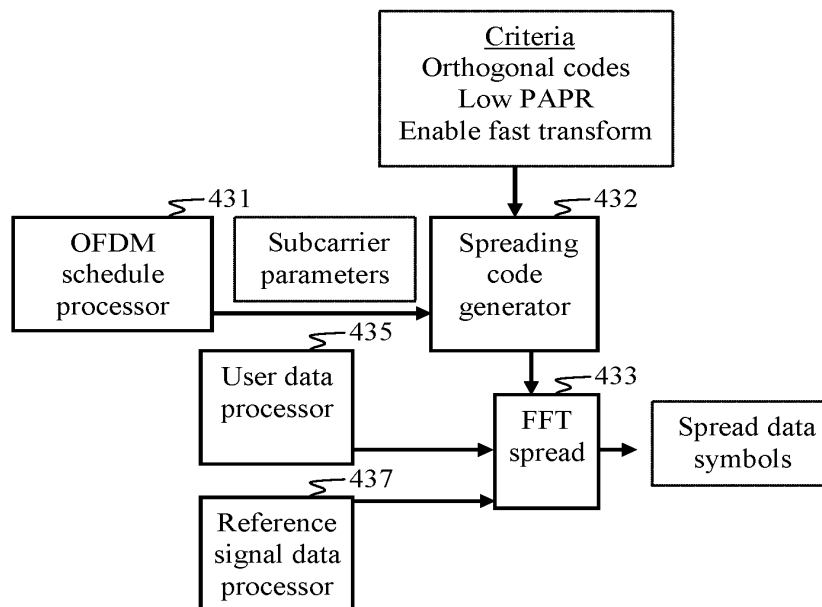


Figure 4B

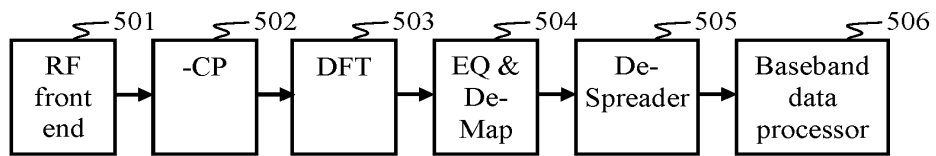


Figure 5A

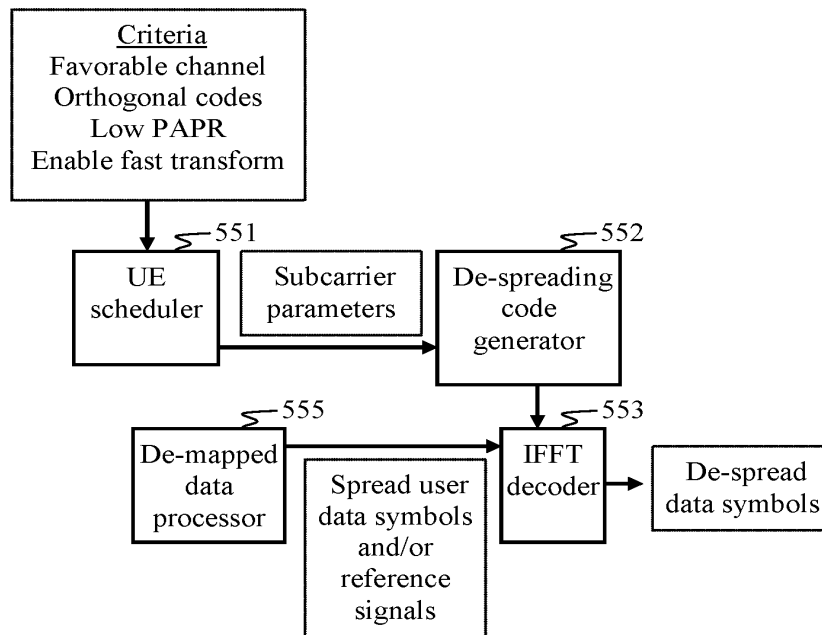


Figure 5B

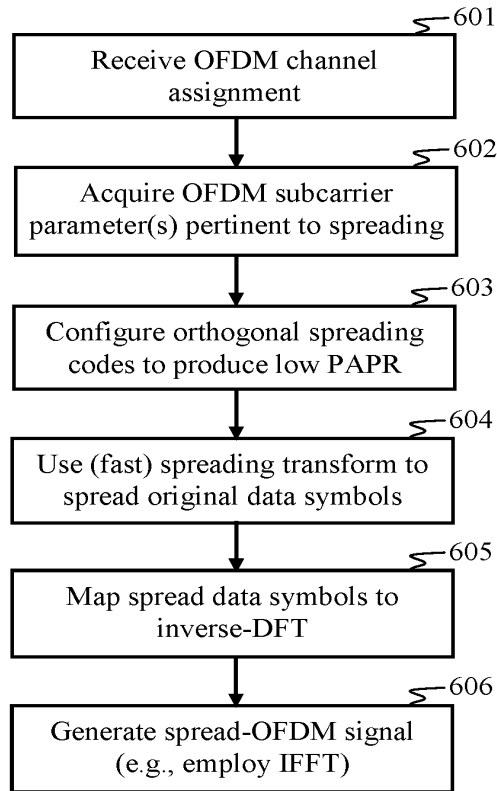


Figure 6A

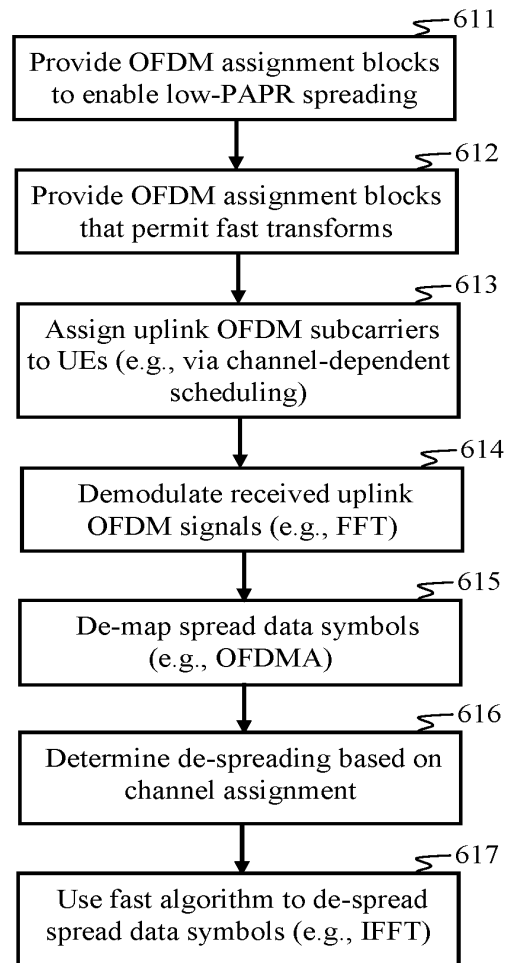


Figure 6B

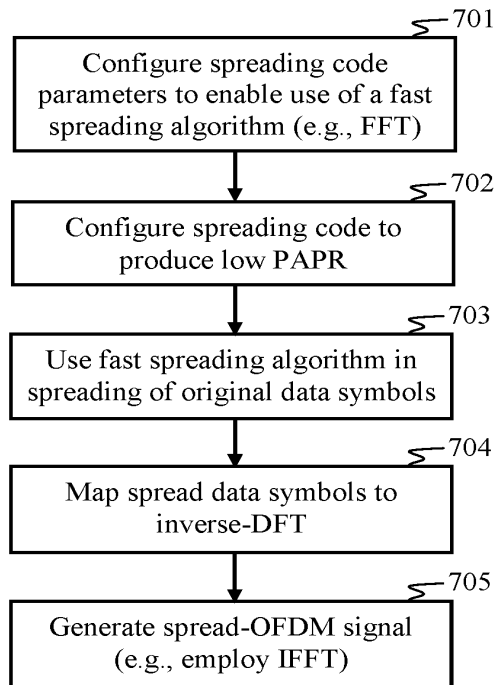


Figure 7A

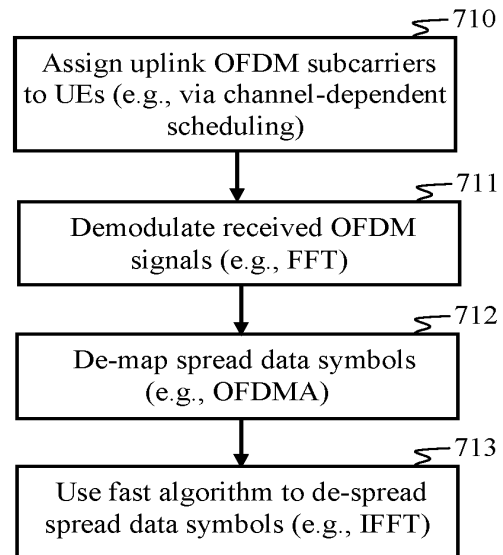


Figure 7B

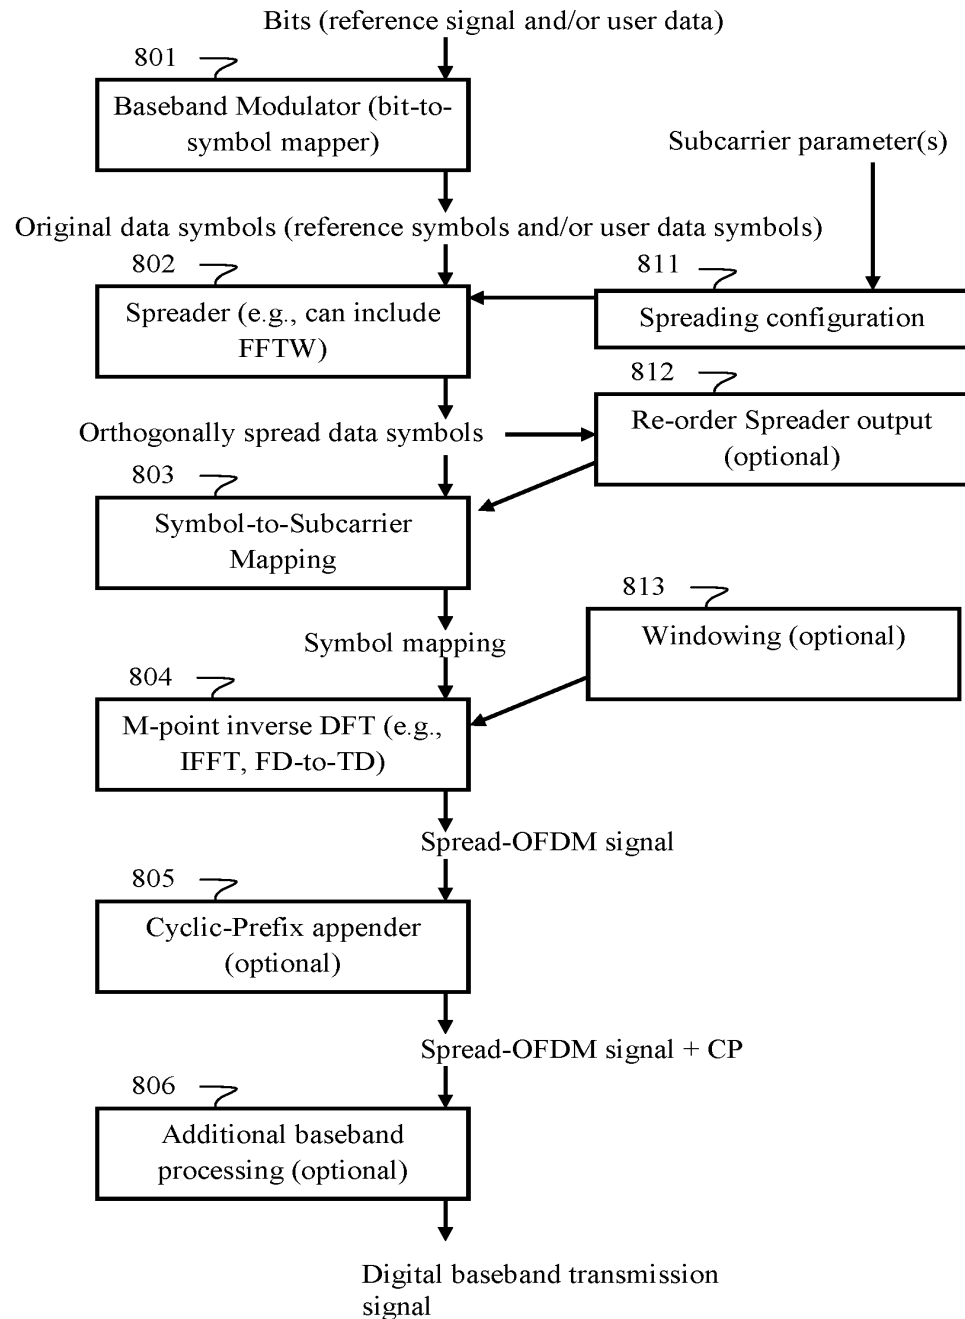


Figure 8A

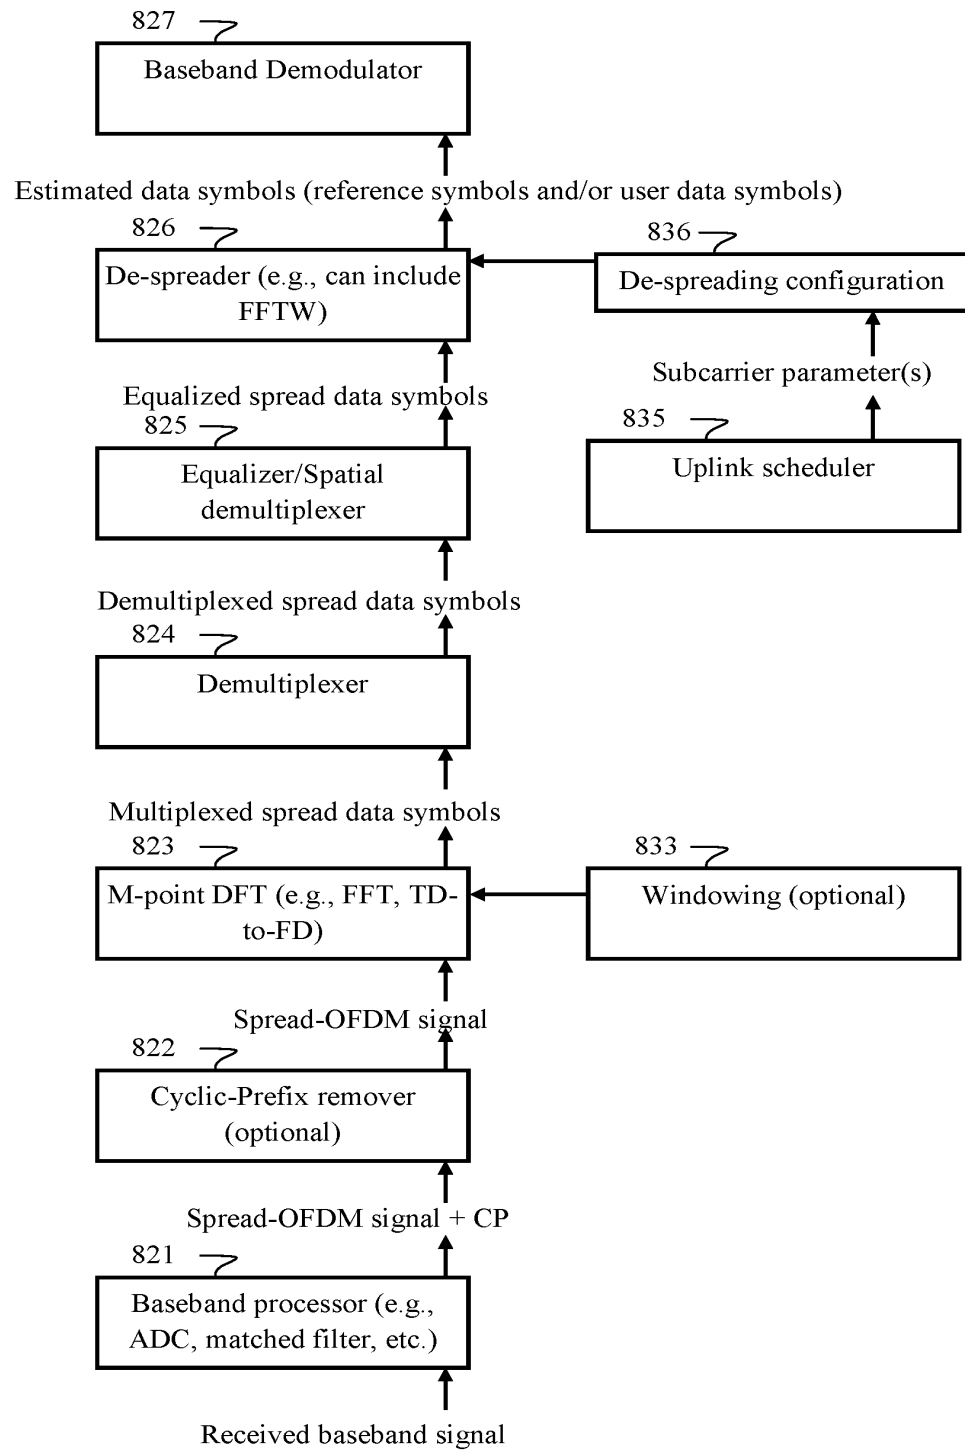


Figure 8B

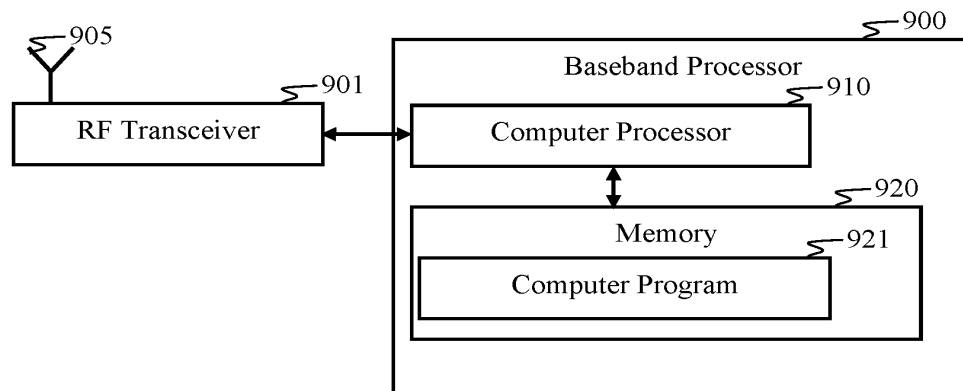


Figure 9

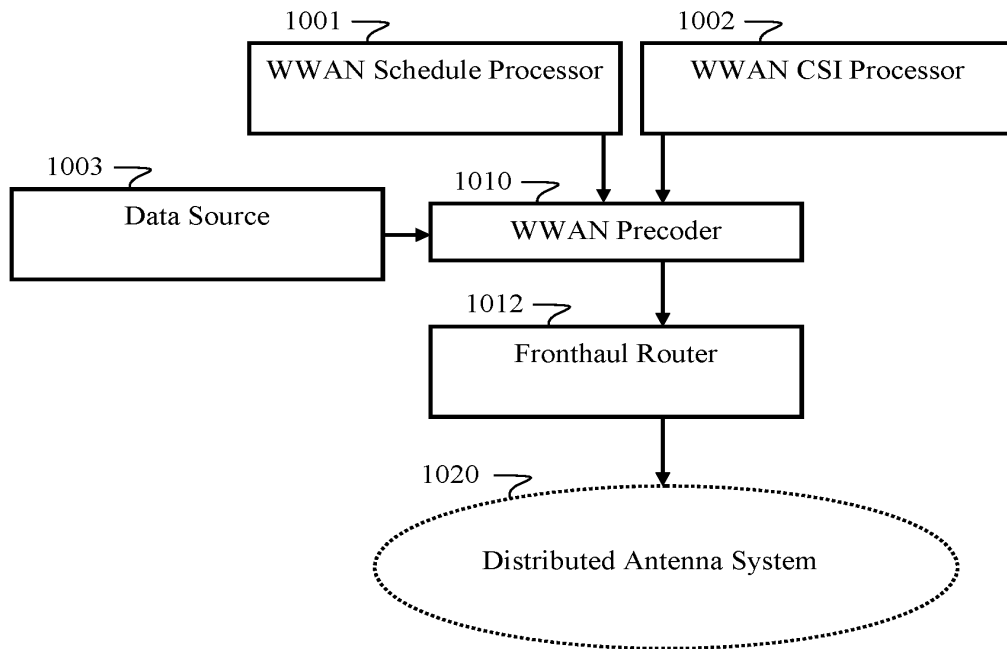


Figure 10A

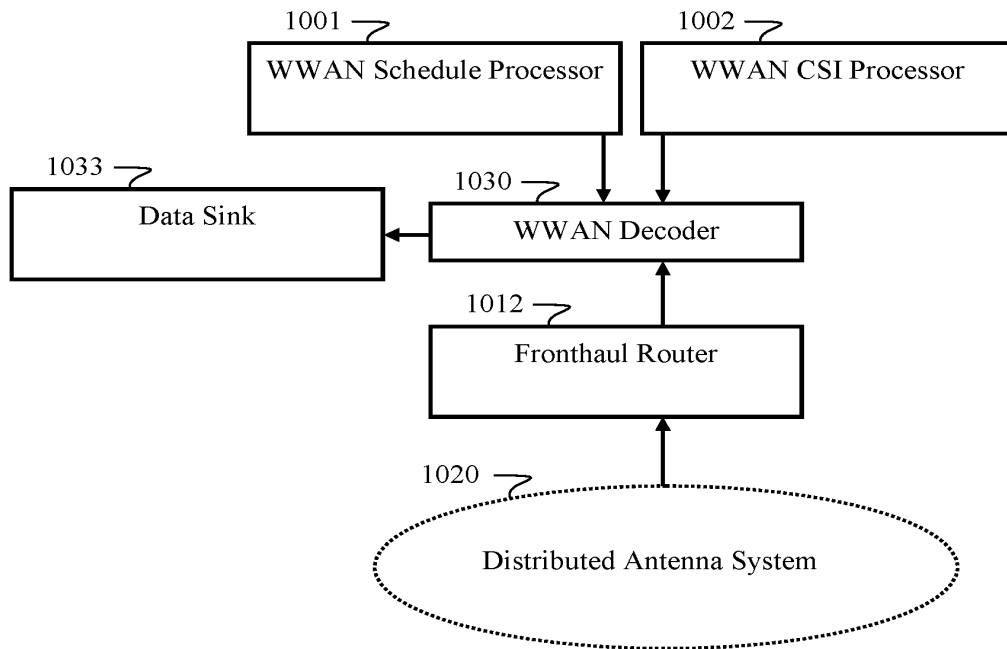


Figure 10B

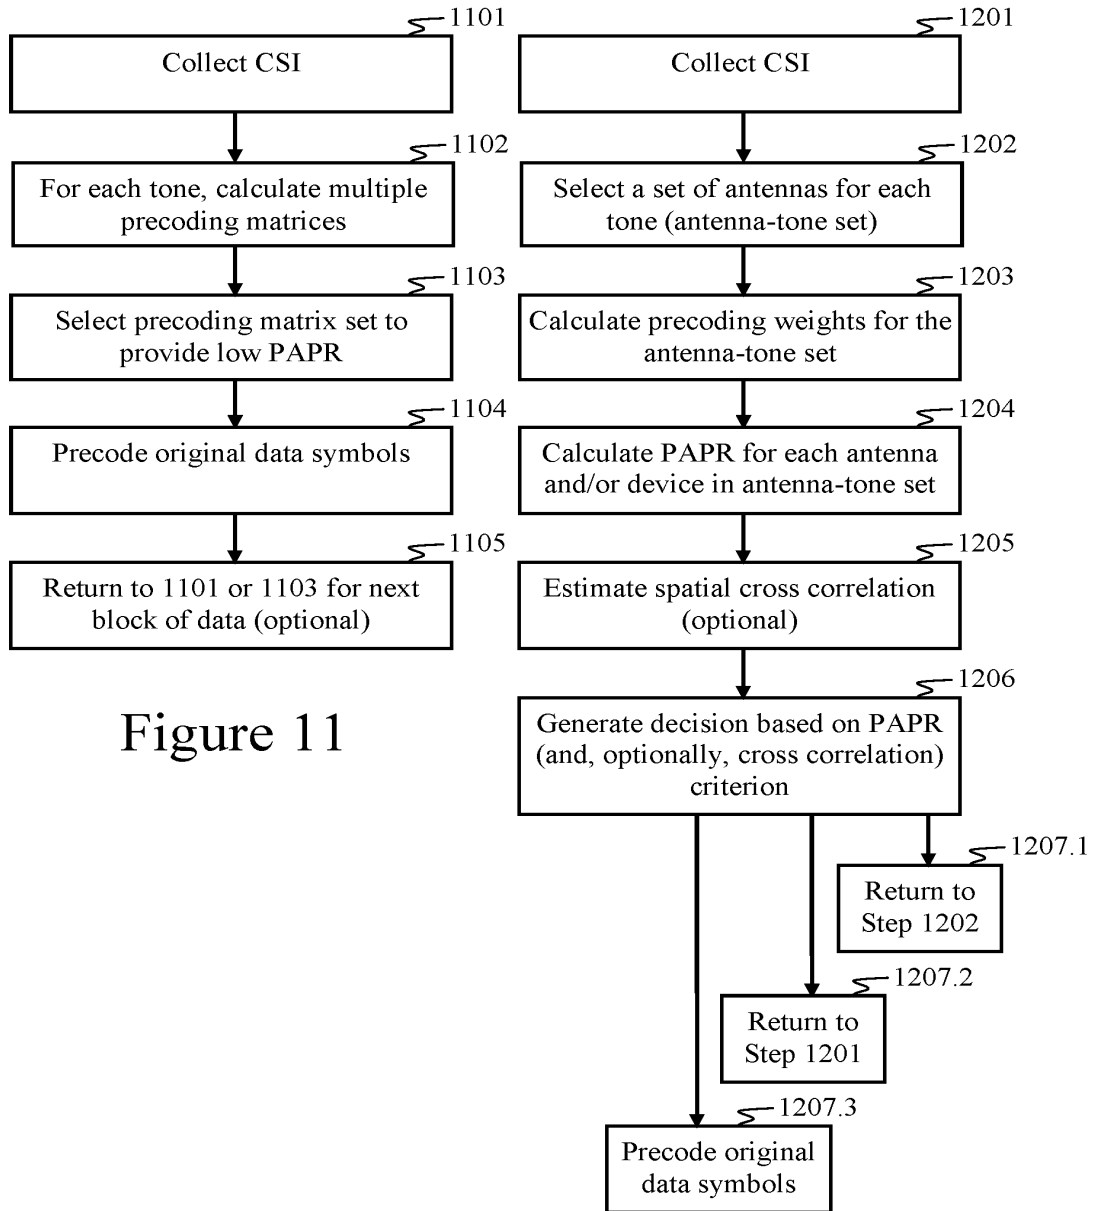


Figure 11

Figure 12

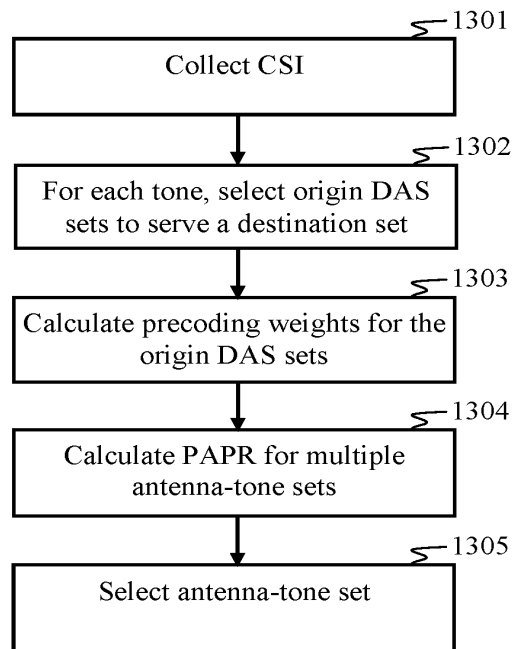


Figure 13

Electronic Patent Application Fee Transmittal				
Application Number:				
Filing Date:				
Title of Invention:		Spreading and Precoding in OFDM		
First Named Inventor/Applicant Name:		steve shattil		
Filer:		Steven J Shattil		
Attorney Docket Number:		CBF-000.C2		
Filed as Small Entity				
Filing Fees for Utility under 35 USC 111(a)				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
UTILITY FILING FEE (ELECTRONIC FILING)	4011	1	70	70
UTILITY SEARCH FEE	2111	1	300	300
UTILITY EXAMINATION FEE	2311	1	360	360
Pages:				
Claims:				
CLAIMS IN EXCESS OF 20	2202	4	40	160
Miscellaneous-Filing:				
Petition:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				890

Electronic Acknowledgement Receipt	
EFS ID:	29705139
Application Number:	15642850
International Application Number:	
Confirmation Number:	9786
Title of Invention:	Spreading and Precoding in OFDM
First Named Inventor/Applicant Name:	steve shattil
Customer Number:	74284
Filer:	Steven J Shattil
Filer Authorized By:	
Attorney Docket Number:	CBF-000.C2
Receipt Date:	06-JUL-2017
Filing Date:	
Time Stamp:	15:23:11
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	\$890
RAM confirmation Number	070717INTEFSW15272400
Deposit Account	
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:	

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Oath or Declaration filed	aia0001ss.pdf	223347	no	2
			e24c90a4142ccfaa2b8dc68097440634ef17d611		
Warnings:					
Information:					
2	Application Data Sheet	aia0014.pdf	1561831	no	7
			71a0f6d34fe98b2b8e0c263d60073353921eb375		
Warnings:					
Information:					
3		CBF_000_Spec.pdf	589033	yes	84
			63c4d774113a16c04a72b5433c4ede0bef07e2ba		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	79	
	Claims		80	83	
	Abstract		84	84	
Warnings:					
Information:					
4	Transmittal of New Application	aia0015.pdf	309450	no	2
			a40e5ee86d7bc4e89f8e50e3803e183b9bc03092		
Warnings:					
Information:					
5	Preliminary Amendment	CBF_000_C2_Preliminary_Ame ndment.pdf	223879	no	11
			c8130ab8abab8621c0c029807e1b0d55ee1f587b		

Warnings:					
Information:					
6	Drawings-only black and white line drawings	Sheet_01.pdf	52174	no	1
			15ccea1d9f849a69ada15e4d38d0135d7e830689		
Warnings:					
Information:					
7	Drawings-only black and white line drawings	Sheet_02.pdf	55376	no	1
			87f2eeea62e153fb1f6da78d9647c49024e4300a2		
Warnings:					
Information:					
8	Drawings-only black and white line drawings	Sheet_03.pdf	48198	no	1
			b0dee3c72af6be09896f68eb7954b0140d20d6b9		
Warnings:					
Information:					
9	Drawings-only black and white line drawings	Sheet_04.pdf	52062	no	1
			c44001b5174963356a4cacbb08461890022d5384		
Warnings:					
Information:					
10	Drawings-only black and white line drawings	Sheet_05.pdf	53415	no	1
			1194c1524b1f7fd3bccc48bb10851bb3a2470981		
Warnings:					
Information:					
11	Drawings-only black and white line drawings	Sheet_06.pdf	55200	no	1
			d3fc5145a45894922aad2d25b75ffe0cce0f663a		
Warnings:					
Information:					
12	Drawings-only black and white line drawings	Sheet_07.pdf	52960	no	1
			efff3e84019c4a170e2c398dbe474b2061af6137		
Warnings:					
Information:					

13	Drawings-only black and white line drawings	Sheet_08.pdf	55834	no	1
			46741696b80ebdb4afecc9b4943dccc4dd6b9631		
Warnings:					
Information:					
14	Drawings-only black and white line drawings	Sheet_09.pdf	59124	no	1
			90d43f4de65b3194f438037cea2c5548df5cdea2		
Warnings:					
Information:					
15	Drawings-only black and white line drawings	Sheet_10.pdf	42461	no	1
			bfbdd6844e8c62b187b1d5d893fd8e9362aea654		
Warnings:					
Information:					
16	Drawings-only black and white line drawings	Sheet_11.pdf	43501	no	1
			16a6b01f1b3f39e52cb9ed827a0b8c17a3d57705		
Warnings:					
Information:					
17	Drawings-only black and white line drawings	Sheet_12.pdf	45082	no	1
			9208e5a945bfb5925985e9cf32eef8c4db146e09		
Warnings:					
Information:					
18	Drawings-only black and white line drawings	Sheet_13.pdf	53186	no	1
			58853cb4ebb28d971862038e71acb66cac0f54e		
Warnings:					
Information:					
19	Drawings-only black and white line drawings	Sheet_14.pdf	44446	no	1
			0ba85572f0255be12214423c4093219c9bee983b		
Warnings:					
Information:					

20	Fee Worksheet (SB06)	fee-info.pdf	36804	no	2
			6efff736e3404bc1e29929b89f0491d8d69c206f		
Warnings:					
Information:					
Total Files Size (in bytes):				3657363	
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN
APPLICATION DATA SHEET (37 CFR 1.76)**

Title of Invention	Spreading and Precoding in OFDM
-------------------------------	---------------------------------

As the below named inventor, I hereby declare that:

This declaration is directed to: ☒ The attached application, or
☐ United States application or PCT international application number _____
filed on _____.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: Steve J Shattil Date (Optional): 07/06/2017
Signature: /Steve J Shattil/

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	CBF-000.C2
		Application Number	
Title of Invention	Spreading and Precoding in OFDM		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Inventor Information:

Inventor	1				Remove	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Steve		Shattil			
Residence Information (Select One) • US Residency Non US Residency Active US Military Service						
City	Cheyenne	State/Province	WY	Country of Residence	US	
Mailing Address of Inventor:						
Address 1	PO Box 17355					
Address 2						
City	Boulder	State/Province	CO			
Postal Code	80308	Country	US			
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.						
Add						

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
☐ An Address is being provided for the correspondence information of this application.			
Customer Number	74284		
Email Address	genhiscomm@gmail.com	Add Email	Remove Email

Application Information:

Title of the Invention	Spreading and Precoding in OFDM		
Attorney Docket Number	CBF-000.C2	Small Entity Status Claimed	☒
Application Type	Nonprovisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	14	Suggested Figure for Publication (if any)	5A
Filing By Reference :			

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	CBF-000.C2
		Application Number	
Title of Invention	Spreading and Precoding in OFDM		

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)

☒ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	☒ Customer Number	US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	74284		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.

When referring to the current application, please leave the application number blank.

Prior Application Status	Pending		Remove		
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)		
	Continuation of	15489664	2017-04-17		
Prior Application Status	Patented		Remove		
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
15489664	Continuation of	15149382	2016-05-19	9628231	2017-04-18
Prior Application Status	Pending		Remove		

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number		CBF-000.C2	
		Application Number			
Title of Invention		Spreading and Precoding in OFDM			

Application Number		Continuity Type		Prior Application Number	Filing Date (YYYY-MM-DD)
15149382		Continuation in part of		14727769	2015-06-01
Prior Application Status		Patented		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
14727769	Continuation of	14276309	2014-05-13	9048897	2015-06-02
Prior Application Status		Patented		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
14276309	Continuation of	12545572	2009-08-21	9042333	2015-05-26
Prior Application Status		Patented		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)	Patent Number	Issue Date (YYYY-MM-DD)
12545572	Division of	11187107	2005-07-22	8670390	2014-03-11
Prior Application Status		Expired		Remove	
Application Number		Continuity Type		Prior Application Number	Filing Date (YYYY-MM-DD)
11187107		Claims benefit of provisional		60598187	2004-08-02
Prior Application Status		Abandoned		Remove	
Application Number		Continuity Type		Prior Application Number	Filing Date (YYYY-MM-DD)
11187107		Continuation in part of		10145854	2002-05-14
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.					

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(d). When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)ⁱ the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(h)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Remove			
Application Number	Country ⁱ	Filing Date (YYYY-MM-DD)	Access Code ⁱ (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	CBF-000.C2
		Application Number	
Title of Invention	Spreading and Precoding in OFDM		

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013. NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Authorization to Permit Access:

☐ Authorization to Permit Access to the Instant Application by the Participating Offices
If checked, the undersigned hereby grants the USPTO authority to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the World Intellectual Property Office (WIPO), and any other intellectual property offices in which a foreign application claiming priority to the instant patent application is filed access to the instant patent application. See 37 CFR 1.14(c) and (h). This box should not be checked if the applicant does not wish the EPO, JPO, KIPO, WIPO, or other intellectual property office in which a foreign application claiming priority to the instant patent application is filed to have access to the instant patent application. In accordance with 37 CFR 1.14(h)(3), access will be provided to a copy of the instant patent application with respect to: 1) the instant patent application-as-filed; 2) any foreign application to which the instant patent application claims priority under 35 U.S.C. 119(a)-(d) if a copy of the foreign application that satisfies the certified copy requirement of 37 CFR 1.55 has been filed in the instant patent application; and 3) any U.S. application-as-filed from which benefit is sought in the instant patent application. In accordance with 37 CFR 1.14(c), access may be provided to information concerning the date of filing this Authorization.

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	CBF-000.C2
		Application Number	
Title of Invention	Spreading and Precoding in OFDM		

Applicant	1 Remove		
If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section. Clear			
☒ Assignee	Legal Representative under 35 U.S.C. 117		Joint Inventor
Person to whom the inventor is obligated to assign.		Person who shows sufficient proprietary interest	
If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:			
Name of the Deceased or Legally Incapacitated Inventor :			
If the Applicant is an Organization check here. ☒			
Organization Name	Genghiscomm Holdings, LLC		
Mailing Address Information For Applicant:			
Address 1	PO Box 17355		
Address 2			
City	Boulder	State/Province	CO
Country	US	Postal Code	80308
Phone Number	7202344351	Fax Number	
Email Address	genghiscomm@gmail.com		
Additional Applicant Data may be generated within this form by selecting the Add button. Add			

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.			
Assignee	1 Remove		
Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.			
If the Assignee or Non-Applicant Assignee is an Organization check here. ☒			

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	CBF-000.C2
		Application Number	
Title of Invention	Spreading and Precoding in OFDM		

Organization Name	Genghiscomm Holdings, LLC
-------------------	---------------------------

Mailing Address Information For Assignee including Non-Applicant Assignee:

Address 1	PO Box 17355		
Address 2			
City	Boulder	State/Province	CO
Country ⁱ	US	Postal Code	80308
Phone Number	7202344351	Fax Number	
Email Address	genghiscomm@gmail.com		

Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button.

Add

Signature:

Remove

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Signature	/Steven J Shattil/		Date (YYYY-MM-DD)	2017-07-06
First Name	Steven	Last Name	Shattil	Registration Number
			40170	

Additional Signature may be generated within this form by selecting the Add button.

Add

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Patent Application

of

Steve Shattil

for

Spreading and Precoding in OFDM

RELATED APPLICATIONS

This application is a Continuation-in-Part of U.S. Pat. Appl. No. 14/727,769, entitled “Cooperative Wireless Networks,” filed June 1, 2015, which is a Continuation of U.S. Pat. Appl. No. 14/276,309, entitled “Cooperative Wireless Networks,” filed May 13, 2014, now U.S. Pat. No. 9,048,897, which is a Continuation of U.S. Pat. Appl. No. 12/545,572, entitled “Cooperative Wireless Networks,” filed August 21, 2009, now U.S. Pat. No. 9,042,333, which is a Divisional of U.S. Pat. Appl. No. 11/187,107, entitled “Cooperative Beam-Forming in Wireless Networks,” filed on July 22, 2005, now U.S. Pat. No. 8,670,390, which claims priority to Provisional Appl. No. 60/598,187, filed August 2, 2004 and is a Continuation In Part of U.S. Pat. Appl. No. 10/145,854, entitled “Carrier Interferometry Networks,” which was filed on May 14, 2002, all of which are incorporated by reference in their entireties.

BACKGROUND

I. Field

The present invention relates generally to wireless communication networks, and more specifically to precoding multicarrier waveforms.

II. Background

The background description includes information that may be useful in understanding the present inventive subject matter. It is not an admission that any of the information provided herein is prior art or relevant to the presently claimed inventive subject matter, or that any publication, specifically or implicitly referenced, is prior art.

The most pressing need in mobile wireless wide area networks (WWANs), such as cellular networks, is to meet the increasing demand for data services. However, only a very small portion of the radio spectrum is suitable for WWAN communications. Above a few Gigahertz, path losses become too great for wide area communications in typical terrestrial environments. Only a fraction of the suitable spectrum is allocated for WWANs, and those allocations are divided among (ostensibly) competing cellular companies.

Various techniques have been proposed to enable more efficient use of the available spectrum, such as spectrum sharing, dynamic bandwidth exchange, and various “smart” radio schemes. Other techniques, such as joint scheduling and power control, can improve frequency reuse in cell configurations. Carrier aggregation simply allocates more radio channels to each client device without improving spectrum efficiency, providing a temporary increase in data services until those channels become congested.

While such techniques can provide more efficient use of the available WWAN spectrum, the laws of Physics still dictate a limit to the amount of information that can be carried with a given amount of WWAN spectrum and power. Unfortunately, demand for data bandwidth continues to grow, irrespective of the limitations imposed by Physics.

SUMMARY

In accordance with some aspects of the disclosure, this most pressing need for ever-increasing data bandwidth within a finite amount of spectrum is solved.

By way of example, a Cooperative-MIMO network comprises a distributed antenna system coordinated with Cooperative-MIMO functionality to serve multiple client devices, such as User Equipments (UEs) in a mobile WWAN. This may be referred to as server-side Cooperative MIMO. The distributed antennas can comprise a fronthaul network configured to deliver precoded Cooperative MIMO baseband signals (such as from a central processor, a distributed computing system (e.g., Cloud computing system), a remote processor, or other processor(s)) to the antennas to provide for precoded MIMO transmissions into the WWAN channel. Precoding can be configured to produce a localized coherence zone at each of the multiple client devices, which can enable each client device to be served with the entire available WWAN spectrum without causing interference to other ones of the multiple client devices. The localized coherence zone can be referred to as a spatial subchannel or a subspace channel. In one aspect, Cooperative-MIMO precoding configures the distributed network of antennas and the natural scattering environment to focus transmissions that coherently combine at each of the client devices, thereby producing the localized coherence zones. Similarly, Cooperative-MIMO demultiplexing can separate same-band transmissions from the client devices. While server-side Cooperative MIMO can provide nearly ideal frequency reuse of the WWAN spectrum, the amount of data that can be transmitted to each client device is limited by the WWAN spectrum (and power).

Therefore, in accordance with some aspects of the disclosure, the aforementioned server-side Cooperative-MIMO system(s) can further comprise a client-side Cooperative-MIMO system. By way of example, nearby client devices may self-organize into Cooperative-MIMO clusters, or some other technique may be employed to group client devices to provide for Cooperative-MIMO processing. For example, a server-side or some other centralized coordination technique may be employed. A wireless fronthaul network communicatively couples together the client devices to provide a cluster. The wireless fronthaul network can employ short-range wireless

links, such as extremely high-bandwidth (relative to WWAN link bandwidth), low-power transmissions. The fronthaul transmissions can employ millimeter-wave, infrared, and/or optical spectrum, which is usually impractical for use in mobile WWANs, but which supports much higher data bandwidth than a WWAN channel. In some aspects, the fronthaul links might enable 10,000 times (or more) spectrum than the total available WWAN spectrum.

In systems disclosed herein, the theoretical limit of the WWAN data bandwidth is no longer limited by the WWAN spectrum, but rather, it can increase up to the data bandwidth of the cluster's very wideband fronthaul network minus some processing overhead. For example, on the downlink, cooperative processing among client devices in a cluster can allow one client device to aggregate the data bandwidth of all the subspace channels (i.e., localized coherence zones) serving the cluster. This is advantageous since each client device, even when it is active, does not employ its available downlink channel one hundred percent of the time. Rather, a client device typically transmits and receives data only a small fraction of the time it is being used. This is sometimes referred to as an activity factor. In accordance with aspects of the disclosure, as the cluster grows, each client device has more available instantaneous data bandwidth for the WWAN uplink and downlink. This is because multiple independent parallel spatial subchannels in the WWAN can be exploited to serve a single client device, thus expanding its data bandwidth far beyond the limited amount of spectrum in a single WWAN subspace channel.

Such aspects of the disclosure can provide the counter-intuitive result that as more client devices join a WWAN, the data bandwidth per client device increases instead of decreases, provided that there is a sufficient number of server-side antennas to accommodate the additional devices. In accordance with some aspects of the disclosure, client devices can be provisioned to operate as server-side antennas communicatively coupled to the server-side fronthaul network. This allows the network infrastructure to grow as client devices join the WWAN. A generalized concept of a relay node is introduced in which the relay node may be part of a server-side distributed antenna system, a client-side cluster, or both. A relay node can operate in multiple clusters and/or multipoint groups. The relay node can be a client device, a server-side device or component, or some other device, and it can be configured to adapt its function as it operates with different cooperating devices.

In accordance with some aspects of the disclosure, cooperative processing can be configured to reduce backhaul overhead, including the data bandwidth required for backhaul communications. For example, in some aspects, cooperative processing at the edge of the radio access network can reduce backhaul loads. However, in many aspects, the backhaul network's spectrum is far larger than the amount of spectrum allocated to the WWAN. Thus, in some implementations, a practical limitation to the WWAN data bandwidth might be related to the processing capability of the cooperating devices. This limitation can be advantageous in view of the alternative, because unlike the hard limitation imposed by Physics, processing power approximately doubles every eighteen months according to Moore's Law.

Some aspects of the disclosure provide for configuring distributed processing to enhance processing efficiency. For example, processing performed by cooperating client devices can be configured via various techniques and/or algorithms to improve processing efficiency. As used herein, processing efficiency can be achieved by employing signal processing algorithms that require a fewer number of total operations, require a fewer number of complex operations, require a fewer number of data exchanges with other processors, reduce latency, reduce power consumption, reduce processor idle time, and the like. Various processing techniques, such as pipelined processing architectures and the like, can be configured to improve processing efficiency. An end result of improved processing efficiency can include, among other things, a cluster being able to comprise a larger number of cooperating devices.

In some aspects of the disclosure, system configurations produce a high-rank channel matrix, which permits lower-complexity maximum ratio combining/transmission to be employed instead of zero forcing or other higher-complexity algorithms.

In accordance with some aspects of the disclosure, various signal-processing algorithms employed in a WWAN transceiver can be combined, thus enabling a more efficient implementation. In some aspects, complex spreading codes can be employed to spread data symbols (e.g., user data and/or reference signals) to enable certain benefits, such as crest-factor

reduction, which can enable lower power consumption, less-expensive radio components, and/or other benefits.

While some aspects of the disclosure can employ techniques to reduce the peak-to-average power (PAPR) of an OFDM transmission at the inverse discrete Fourier transform (IDFT), such as by operating on the signal output at the IDFT (e.g., via clipping, signal cancellation, or selecting one of a set of candidate OFDM signals that has the lowest PAPR), certain advantages can be realized by spreading the data symbols before the IDFT operation in a manner that causes the IDFT output signal to have a low PAPR. In such aspects, the spreading codes can be configured in response to OFDM subcarrier assignment to the device (e.g., uplink subcarriers assigned to a client device) to produce a transmitted OFDM signal with low PAPR. Parameters of the assigned subcarriers, such as subcarrier frequency spacing and number of subcarriers, can be used to determine complex spreading codes that produce a low-PAPR signal at the IDFT output. Configuring the spreading codes to provide a spread-OFDM signal with low PAPR can comprise an appropriate mapping of spread symbols to OFDM subcarriers in a manner that produces the desired low-PAPR signal. This can include re-ordering the output of the spreader prior to its input to the IDFT. In some aspects, OFDM subcarriers are assigned to a client device by a server-side device, such as to provide for channel-dependent scheduling. Thus, the server-side device can also determine the complex spreading codes for the purpose of de-spreading signals received from the client device

In some aspects of the disclosure, characteristics of a data signal, such as its spectral information (i.e., frequency response) may be processed. In accordance with some aspects of the disclosure, this processing is responsive to OFDM subcarrier assignment to configure complex spreading of the data signal (and/or its spectral information) in a manner that, based on parameters of the assigned subcarriers (such as frequency spacing), produces a spread-OFDM signal with low PAPR. Without complex spreading configured in the aforementioned manner, the spectral information modulated onto an OFDM signal can produce a transmission with high PAPR. In some aspects of the disclosure, a transmitter receives an OFDM subcarrier assignment, and based on subcarrier parameters (such as frequency spacing, number of subcarriers, and/or other parameters) configures a transform operation that includes complex spreading codes which

spread a data signal in a manner that, when modulated onto the OFDM subcarriers, produces a superposition signal (i.e., a transmitted OFDM signal) with a low PAPR.

By way of example, data spreading in the WWAN uplink channel can be performed by the individual client devices, wherein the spreading codes can be configured to employ fast algorithms for spreading and/or spreading-code generation. In some aspects, the data spreading can be configured to employ a similar fast algorithm used for a different signal processing operation, such as an IDFT used for modulating data onto an OFDM signal and/or a DFT used for demodulation. This can permit a given logical structure and/or physical processor architecture to perform similar signal processing algorithms (e.g., fast algorithms) for different radio transceiver operations (e.g., coding and modulation). In some aspects, a pipelined architecture can be employed, such as to make efficient use of one or more processors (e.g., a specialized hardware component or a general-purpose processor configured to perform the fast algorithm) to perform the different radio transceiver operations. In some aspects, multiple processors residing on different devices (e.g., client devices, server devices, combinations thereof) can be configured to cooperatively process signals via fast algorithms, wherein the client-side fronthaul can function as a computer bus (such as between processors, memories, ports, and/or other network resources) between computing components distributed across multiple network nodes, including client devices. In such aspects, the networked processors can be pipelined to provide efficient processing of multiple radio transceiver operations.

By way of example, a fast algorithm can be a fast Fourier transform (FFT), such as a radix-2 FFT. Thus, a client device can be configured to perform a radix-2 FFT as part of a DFT-spreading of original data symbols, and the client device can be configured to perform a radix-2 FFT to modulate the spread data symbols onto OFDM subcarrier signals. In some aspects, the client device can configure processing hardware and/or software to employ the same radix-2 FFT (although possibly with different input parameters, transform size, etc.) for different, typically unrelated, radio transceiver operations, such as DFT-spreading and OFDM modulation, or DFT-spreading and OFDM demodulation, as well as others. It should be appreciated that such aspects may be performed as part of cooperative processing among multiple client devices, on the server side, with the aid of one or more relay devices, and/or some combination thereof.

In accordance with some aspects of the disclosure, spreading produces a different result than spectrum analysis. For example, spectrum analysis can provide for calculating frequency responses of a signal corresponding to tones. The term, “tones,” is commonly used to mean orthogonal frequencies, such as in relation to the term, “discrete multitone modulation,” which denotes OFDM-based communication systems that adapt the transmission to the channel conditions individually for each subcarrier. In OFDM, as in spectrum analysis, the tones are a set of frequency-multiplexed signals with the exact frequencies needed to make them orthogonal so they do not interfere with each other. In discrete systems, spectrum analysis expresses a discrete signal of N complex data symbols as a set of $N/2$ frequency responses. This is because frequencies between the Nyquist rate $f_{\text{sam}}/2$ and the sample rate f_{sam} alias to negative frequencies due to sampling above the Nyquist rate. These are the same tones as the corresponding positive frequencies. While the output of a DFT comprises N values, there are only $N/2$ tones, so the $N/2$ redundant frequency responses are typically discarded to provide spectral analysis, resulting in only half the values that DFT spreading would otherwise provide.

In some aspects of the disclosure, a radio transceiver can be configured to perform another type of signal-processing operation for different, typically unrelated, radio transceiver operations. By way of example, linear network coding can be configured to employ similar processing operations as in MIMO subspace precoding (i.e., multiplexing) and/or demultiplexing. Similarly, linear network decoding can employ similar operations as MIMO subspace multiplexing and/or demultiplexing. Thus, client-side and/or server-side processors can be configured to perform linear network coding that employs basically the same algorithms used to provide for spatial multiplexing and/or demultiplexing.

Aspects disclosed herein can be implemented as apparatus configurations comprising structural features that perform the functions, algorithms, and methods described herein. Flow charts and descriptions disclosed herein can embody instructions, such as in software residing on a non-transitory computer-readable medium, configured to operate a processor (or multiple processors). Flow charts and functional descriptions, including apparatus diagrams, can embody methods for operating a communication network(s), coordinating operations which support communications

in a network(s), operating network components (such as client devices, server-side devices, relays, and/or supporting devices), and assembling components of an apparatus configured to perform the functions disclosed herein.

Groupings of alternative elements or aspect of the disclosed subject matter disclosed herein are not to be construed as limitations. Each group member can be referred to and claimed individually or in any combination with other members of the group or other elements found herein. One or more members of a group can be included in, or deleted from, a group for reasons of convenience and/or patentability. When any such inclusion or deletion occurs, the specification is herein deemed to contain the group as modified, thus fulfilling the written description of all Markush groups used in the appended claims.

All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., “such as”) provided with respect to certain embodiments herein is intended merely to better illuminate the inventive subject matter and does not pose a limitation on the scope of the inventive subject matter otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the inventive subject matter.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The features and advantages of the invention may be realized and obtained by means of the instruments and combinations particularly pointed out in the appended claims. These and other features of the invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth herein.

The following patent applications and patents are hereby incorporated by reference in their entireties: Pat. No. 8,670,390, Pat. Appl. No. 10/145,854, Pat. No. 9,225,471, Pat. No. 9,270,421, Pat. No. 9,325,805, Pat. Appl. No. 14/789,949, Pat. Appl. No. 62/197,336, Pat. Appl. No.

14/967,633, Pat. Appl. No. 60/286,850, Pat. No. 8,929,550, Pat. No. 7,430,257, Pat. No. 6,331,837, and Pat. No. 7,076,168.

BRIEF DESCRIPTION OF DRAWINGS

Flow charts depicting disclosed methods comprise "processing blocks" or "steps" may represent computer software instructions or groups of instructions. Alternatively, the processing blocks or steps may represent steps performed by functionally equivalent circuits, such as a digital signal processor or an application specific integrated circuit (ASIC). The flow diagrams do not depict the syntax of any particular programming language. Rather, the flow diagrams illustrate the functional information one of ordinary skill in the art requires to fabricate circuits or to generate computer software to perform the processing required in accordance with the present disclosure. It should be noted that many routine program elements, such as initialization of loops and variables and the use of temporary variables are not shown. It will be appreciated by those of ordinary skill in the art that unless otherwise indicated herein, the particular sequence of steps described is illustrative only and can be varied. Unless otherwise stated, the steps described below are unordered, meaning that the steps can be performed in any convenient or desirable order.

FIG. 1 is a block diagram of a communication system architecture in accordance with an exemplary aspect of the disclosure.

FIG. 2 illustrates a network configuration for super-array processing in accordance with some aspects of the disclosure.

FIG. 3 is a block diagram of a network topology, the type of which can be employed in accordance with aspects of the disclosure.

FIG. 4A is a block diagram of a spread-OFDM transmitter in accordance with an aspect of the disclosure.

FIG. 4B is a block diagram of a spread-OFDM spreader (such as spreader 402) in accordance with some aspects of the disclosure.

FIG. 5A is a block diagram of a receiver configured to receive and process spread-OFDM signals in accordance with aspects of the disclosure.

FIG. 5B is a block diagram that depicts a portion of a receiver, such as a receiver that may be employed in a server-side WWAN terminal or system.

FIG. 6A is a flow diagram that depicts a method performed in a radio transceiver, which can employ a fast algorithm to generate a spread data sequence from an original data sequence in accordance with some aspects of the disclosure.

FIG. 6B is a flow diagram that depicts a method for processing received spread-OFDM signals, which can be employed in accordance with various aspects of the disclosure.

FIG. 7A is a flow diagram that depicts a method for generating spread-OFDM signals in accordance with some aspects of the disclosure.

FIG. 7B is a flow diagram that depicts a method of processing received spread-OFDM signals in accordance with some aspects of the disclosure.

FIG. 8A is a block diagram that depicts modules corresponding to processing functions that can be implemented by a computer processor programmed to perform methods in accordance with aspects of the disclosure. The blocks can be interpreted as software modules, hardware components, or some combination thereof. The modules can represent steps in a method. In some aspects, the block diagram is indicative of structure and/or function of a client device (such as a UE) or a system of client devices.

FIG. 8B is a block diagram that depicts modules corresponding to processing functions that can be implemented by a computer processor programmed to perform methods in accordance with

aspects of the disclosure. The blocks can be interpreted as software modules, hardware components, or some combination thereof. The modules can represent steps in a method. In some aspects, the block diagram is indicative of structure and/or function of a server-side device (such as a base transceiver station (e.g., an eNodeB) or a central processor coupled to one or more base transceiver stations), or a system of server-side devices, such as a Coordinate Multipoint system.

FIG. 9 is a block diagram of a transceiver that can be configured to operate in accordance with aspects of the disclosure.

FIGs. 10A and 10B are block diagrams that illustrates transceiver configurations in accordance with aspects of the disclosure. The blocks can comprise processing elements that provide necessary computing facilities for the transceiver. By way of example only, processing elements can include special purpose hardware accelerators, such as co-processors for Fast Fourier Transform (FFT), encryption and decryption security processors, or programmable Central Processing Units (CPUs).

FIG. 11 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure.

FIG. 12 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure.

FIG. 13 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure.

DETAILED DESCRIPTION

Various aspects of the disclosure are described below. It should be apparent that the teachings herein may be embodied in a wide variety of forms and that any specific structure, function, or both being disclosed herein are merely representative. Based on the teachings herein one skilled

in the art should appreciate that an aspect disclosed herein may be implemented independently of any other aspects and that two or more of these aspects may be combined in various ways. For example, an apparatus may be implemented or a method may be practiced using any number of the aspects set forth herein. In addition, such an apparatus may be implemented or such a method may be practiced using other structure, functionality, or structure and functionality in addition to or other than one or more of the aspects set forth herein.

In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the invention. It should be understood, however, that the particular aspects shown and described herein are not intended to limit the invention to any particular form, but rather, the invention is to cover all modifications, equivalents, and alternatives falling within the scope of the invention as defined by the claims.

FIG. 1 is a block diagram of a communication network in accordance with an exemplary aspect of the disclosure. A plurality N of geographically distributed base transceiver stations 101.1-101.N (BTS(1), BTS(2), ..., BTS(N)) are communicatively coupled to a super-array processing system 111 via a communication network 105. Each base transceiver station 101.1-101.N comprises an antenna system configured for communicating with one or more mobile units (e.g., User Equipment) 120.1-120.K via a WWAN radio access network (RAN).

In one aspect, the first base transceiver station 101.1 comprises a first antenna array comprising a first plurality M_1 of antennas 102.1-102. M_1 , the second base transceiver station 101.2 comprises a second antenna array comprising a second plurality M_2 of antennas 102.1-102. M_1 , and the N^{th} base transceiver station 101.N comprises an N^{th} antenna array comprising an N^{th} plurality M_N of antennas 104.1-104. M_N . The base transceiver stations 101.1-101.N are configured to provide RAN services to a plurality K of mobile units 120.1, 120.2, ..., 120.K, each having its own antenna system 121.1, 121.2, ..., 121.K, respectively. Each antenna system 121.1, 121.2, ..., 121.K may comprise one or more antennas.

The communication network 105 may comprise a fiber network, a cable (i.e., wired) network, a wireless network (including a free-space optical network), or any combination thereof. In some

aspects, the network 105 is referred to as a “fronthaul” network. In some aspects, the network 105 can comprise a backhaul network. In accordance with one aspect of the disclosure, a network that connects base transceiver stations to a processing system configured to perform joint processing (e.g., system 111) can be referred to as a fronthaul, and a network (such as network 115) which connects processing elements of the super-array processing system 111 can be referred to as a backhaul.

The terms “backhaul” and “fronthaul” can be used interchangeably in some aspects of the disclosure. A fronthaul is similar to a backhaul, which, at its simplest, links a radio access network to a wired (e.g., cable or optical fiber) network. A fronthaul can comprise a backhaul, or a portion of a backhaul. For example, a fronthaul can comprise a connection between one or more centralized controllers and remote stand-alone radio heads. A fronthaul can connect a central processor to multiple base transceiver stations. A fronthaul connects multiple base transceiver stations together when one or more of the base transceiver stations functions as a central processor. As used herein, a fronthaul may comprise a traditional backhaul network. For example, a fronthaul can comprise at least a portion of S1 and/or X2 interfaces. A fronthaul may be part of a base station network. In Pat. Appl. Ser. No. 60/286,850, it is disclosed that a fronthaul can comprise optical fiber, wired, and/or radio networks. In one aspect of the disclosure, point-to-point fiber links provide high bandwidth and low latency. In another aspect, radio (e.g., microwave) links can provide high bandwidth and low latency, and can be substantially less expensive to implement than fiber. Furthermore, wireless links enable mobile radios and/or other radio transceivers (e.g., remote radio equipment) to be networked together via a radio fronthaul, such as disclosed in Pat. Appl. Ser. No. 10/131,163. Accordingly, a fronthaul can comprise any combination of wireless, wired, and optical fiber links that communicatively couple together a group of radio transceivers configured to perform cooperative MIMO. Here, a group of radio transceivers is also referred to as a “micro-cell” and a “pico-cell” in the ‘163 application, and as a “local group” and a “micro-network” in Pat. Appl. Ser. No. 11/187,107, all of the patents and patent applications mentioned in this disclosure being incorporated by reference in their entireties.

In one aspect of the disclosure, the super-array processing system 111 comprises a distributed computing system configured to coordinate a plurality of physical processors (which may be centrally located or geographically distributed) such as to perform joint processing. In some aspects, the plurality of physical processors can be represented as processors 111.1-111.N. In other aspects, virtual processors (such as virtual base stations implemented as software-defined radios (SDRs)) can be represented as processors 111.1-111.N.

By way of example, but without limitation, physical processors in a distributed computing environment can be represented as processors 111.1-111.N. As used herein, the term “processor” can refer to a computer processor, a computer, a server, a central processing unit (CPU), a core, a microprocessor, and/or other terminology that indicates electronic circuitry configurable for carrying out instructions of a computer program. In some aspects, a processor comprises geographically distributed computing elements (e.g., memories, processing cores, switches, ports, and/or other computing or network resources). A fronthaul and/or backhaul network communicatively coupling the geographically distributed computing elements can function as a computer bus.

The processors are communicatively coupled together via at least one network, such as a backhaul network 115. The backhaul network 115 can comprise an optical fiber network, a wireline network (e.g., Ethernet or other cable links), a wireless network, or any combination thereof. In some aspects, the backhaul network 115 can comprise the RAN. In one aspect, each of N processors is programmed to function as one of a plurality N of virtual base stations 111.1-111.N. In another aspect, each virtual base station 111.1-111.N comprises multiple processing cores. In some aspects, each virtual base station 111.1-111.N represents a hardware abstraction wherein details of how the hardware is implemented are concealed within the representation of each “processor” 111.1-111.N as a single element. In such aspects, the physical implementation of each processor 111.1-111.N can comprise physical computing elements that are geographically distributed and/or physical computing elements that are shared by multiple virtual base stations 111.1-111.N.

By way of example, each virtual base stations 111.1-111.N may comprise one or more of the processors and perform base station processing operations that would ordinarily be performed by one or more corresponding base stations 101.1-101.N. Specifically, virtual base stations can be implemented via software that programs general-purpose processors. For example, an SDR platform virtualizes baseband processing equipment, such as modulators, demodulators, multiplexers, demultiplexers, coders, decoders, etc., by replacing such electronic devices with one or more virtual devices, wherein computing tasks perform the functions of each electronic device. In computing, virtualization refers to the act of creating a virtual (rather than actual) version of something, including (but not limited to) a virtual computer hardware platform, operating system (OS), storage device, or computer network resources.

In accordance with the art of distributed computing, a virtual base station's functions can be implemented across multiple ones of the plurality of processors. For example, workloads may be distributed across multiple processor cores. In some aspects, functions for more than one base station are performed by one of the processors.

As used herein, distributed computing refers to the use of distributed systems to solve computational problems. In distributed computing, a problem is divided into multiple tasks, and the tasks are solved by multiple computers which communicate with each other via message passing. A computer program that runs in a distributed system is referred to as a distributed program. An algorithm that is processed by multiple constituent components of a distributed system is referred to as a distributed algorithm. In a distributed computing system, there are several autonomous computational entities, each of which has its own local memory.

In accordance with aspects of the disclosure, the computational entities (which are typically referred to as computers, processors, cores, CPUs, nodes, etc.) can be geographically distributed and communicate with each other via message passing. In some aspects, message passing is performed on a fronthaul and/or backhaul network. The distributed computing system can consist of different types of computers and network links, and the system (e.g., network topology, network latency, number of computers, etc.) may change during the execution of a distributed program. In one aspect, a distributed computing system is configured to solve a

computational problem. In another aspect, a distributed computing system is configured to coordinate and schedule the use of shared communication resources between network devices.

A distributed computing system can comprise a grid computing system (e.g., a collection of computer resources from multiple locations configured to reach a common goal, which may be referred to as a super virtual computer). In some aspects, a distributed computing system comprises a computer cluster which relies on centralized management that makes the nodes available as orchestrated shared servers. In some aspects, a distributed computing system comprises a peer-to-peer computing system wherein computing and/or networking comprises a distributed application architecture that partitions tasks and/or workloads between peers. Such distributed peer-to-peer computing systems are disclosed in the '107 application. In some aspects, peers are equally privileged, equipotent participants in the application. They are said to form a peer-to-peer network of nodes. Peers make a portion of their resources, such as processing power, disk storage, network bandwidth, etc., available to other network participants without the need for central coordination by servers or stable hosts. Peers can be either or both suppliers and consumers of resources.

In accordance with some aspects of the disclosure, the base transceiver stations 101.1-101.N are “dumb terminals,” wherein base station signal processing (for example, the baseband processing) is performed by the central processor 110 (which may include the distributed computing system 111). Thus, in some aspects, the base transceiver stations 101.1-101.N are simply radio remote units. For example, the base transceiver stations 101.1-101.N might perform only basic signal-processing functions, such as RF processing (i.e., radio front-end processing), which can include frequency conversion and (optionally) ADC/DAC functions, while the central processor 110 (which may include the distributed computing system 111) performs baseband processing, including channel analysis and generating base transceiver MIMO weights.

In one aspect, the central processor 110 coordinates or performs baseband signal processing corresponding to base station operations, whereas the base transceivers 101.1-101.N provide only RF front end signal processing, including frequency conversion, and optionally, ADC/DAC. The central processor can perform waveform shaping, error detection, error correction, power

control, channel selection, multiple access control, multiplexing, modulation, formatting, synchronization, coding, etc. for the plurality of base transceivers (i.e., access points) communicatively coupled to the central processor via the fronthaul network. In some aspects of the disclosure, the central processor 110 provides for base-station functionality, such as power control, code assignments, and synchronization. The central processor 110 may perform network load balancing (e.g., scheduling RAN resources), including providing for balancing transmission power, bandwidth, and/or processing requirements across the radio network. Centralizing the processing resources (i.e., pooling those resources) facilitates management of the system, and implementing the processing by employing multiple processors configured to work together (such as disclosed in the '163 application) enables a scalable system of multiple independent computing devices, wherein idle computing resources can be allocated and used more efficiently.

Some aspects allow base station processing resources (e.g., the processors in the distributed computing system 111) and the remote RF units (e.g., the base transceiver stations 101.1-101.N) to be deployed separately. For example, RAN coverage, capacity, and/or data bandwidth per UE can be improved by adding base transceiver stations, and then the SDR platform dynamically adapts to the new RAN base station configuration. Similarly, the SDR platform can adapt to the loss of one or more of the base transceiver stations 101.1-101.N. The distributed computing system (e.g., cloud network) 111 can adapt to varying processing loads by allocating computing resources as needed. Furthermore, system upgrades, such as new transmission protocols, can be easily implemented via software upgrades to the SDR platform.

In some aspects, base-station functionality is controlled by individual base transceiver stations and/or UEs assigned to act as base stations. Array processing may be performed in a distributed sense wherein channel estimation, weight calculation, and optionally, other network processing functions (such as load balancing) are computed by a plurality of geographically separated processors. In some aspects, access points and/or subscriber units are configured to work together to perform computational processing. A central processor (such as central processor 110) may optionally control data flow and processing assignments throughout the network.

As disclosed in the '850 application, the system depicted in FIG. 1 can provide system performance benefits by centralizing (e.g., pooling) much of the equipment (and/or signal processing) typically employed at the cell sites. Cost reduction is another motivation for centralizing the radio access network, as most of a cellular network's ownership costs comprise operating costs, including site rental, power, and support and maintenance expenses. Thus, instead of distributing baseband processing equipment at the edge of the network as in conventional cellular networks, centralizing the radio access network at the central processor 110 can greatly reduce capital expenditures to build out and upgrade the radio access network, as well as reduce operating expenditures.

As disclosed in the '163 application, providing for distributed computing at the central processor 110 provides network function virtualization to the RAN. Benefits that can be realized with some aspects of the disclosure include cost reduction from pooling and virtualizing baseband processing. This can eliminate the need to provision for peak capacity on a per-site basis, thus reducing processing requirements. Furthermore, instead of requiring dedicated base station hardware, some of the disclosed aspects provide for the use of commercial (e.g., general-purpose) servers running software.

As disclosed in the patents and applications incorporated by reference herein, other types of networks, including wireless networks, can connect the base transceiver stations 101.1-101.N. One of the advantages of employing the optical fiber fronthaul 105 is that optical fiber can provide the high capacity and low latency required by many aspects of the invention. For example, when a large number of baseband processors are co-located at the central processor 110, the amount of data bandwidth in the fronthaul and the synchronization requirements between base transceiver stations 101.1-101.N can increase substantially when high RF bandwidth and MIMO are employed. Different aspects of the invention can provide for different functional splits between centralized and distributed functions.

Some aspects of the invention can reduce fronthaul requirements by implementing at least some of the Physical Layer processing at the base transceiver stations 101.1-101.N while implementing other processing (e.g., higher layer processing, or the higher layer processing plus

some of the Physical layer processing) at the central processor 110. Thus, in some aspects of the invention, one or more of the base transceiver stations 101.1-101.N depicted in the figures may be replaced by UEs adapted to perform as routers, repeaters, and/or elements of an antenna array.

In one aspect of the disclosure, the base station network comprising base transceiver stations 101.1-101.N is adapted to operate as an antenna array for MIMO subspace processing in the RAN. In such aspects, a portion of the network may be adapted to serve each particular UE. The SDRs (represented as the virtual base stations 111.1-111.N) can be configured to perform the RAN baseband processing. Based on the active UEs in the RAN and the standard(s) they use for their wireless links, the SDRs can instantiate virtual base station processes in software, each process configured to perform the baseband processing that supports the standard(s) of its associated UE(s) while utilizing a set of the base transceiver stations within range of the UE(s).

In accordance with one aspect of the disclosure, baseband waveforms comprising RAN channel measurements and/or estimates (such as collected by either or both the UEs and the base transceiver stations) are processed by the SDRs (such as in a Spatial Multiplexing / Demultiplexing module (not shown)) using Cooperative-MIMO subspace processing to produce pre-coded waveforms. A routing module (not shown) sends the pre-coded waveforms over the fronthaul 105 to multiple ones of the base transceiver stations 101.1-101.N, and optionally, to specific antennas 102.1-102.M₁, 103.1-103.M₂, ..., 104.1-104.M_N. The base transceiver stations 101.1-101.N can be coordinated to concurrently transmit the pre-coded waveforms such that the transmitted waveforms propagate through the environment and constructively interfere with each other at the exact location of each UE 120.1-120.K.

In one aspect, the super-array processing system 111 configures complex-weighted transmissions 122, 123, and 124 from the geographically distributed base transceiver station 101.1, 101.2, and 101.N, respectively to exploit the rich scattering environment in a manner that focuses low-power scattered transmissions to produce a concentrated high-power, highly localized signal (e.g., coherence zones 125.1, 125.2, ..., 125.K) at each UE's 120.1-120.K antenna system 121.1, 121.2, ..., 121.K, respectively. The coherent combining of the transmitted waveforms at the location of each UE 120.1-120.K can result in the synthesis of the baseband waveform that had

been output by the SDR instance associated with that particular UE 120.1-120.K. Thus, all of the UEs 120.1-120.K receive their own respective waveforms within their own synthesized coherence zone concurrently and in the same spectrum.

In accordance with one aspect of the invention, each UE's corresponding synthesized coherence zone comprises a volume that is approximately a carrier wavelength or less in width and centered at or near each antenna on the UE. This can enable frequency reuse between nearby – even co-located – UEs. As disclosed in the '107 application, Spatial Multiplexing / Demultiplexing can be configured to perform maximum ratio processing. Any of various algorithms for MIMO processing disclosed in the '107 application may be employed by methods and apparatus aspects disclosed herein. Some aspects can comprise zero forcing, such as to produce one or more interference nulls, such as to reduce interference from transmissions at a UE that is not an intended recipient of the transmission. By way of example, but without limitation, zero forcing may be performed when there are a small number of actual transmitters (e.g., base transceiver station antennas) and/or effective transmitter sources (e.g., scatterers in the propagation environment).

While the aforementioned techniques of server-side Cooperative MIMO in a multi-user MIMO system provide substantial bandwidth efficiency, which is a significant advance in wireless communications, the amount of data bandwidth available to each UE is still hard-limited based on the total radio bandwidth allocated to the WWAN. However, client-side Cooperative MIMO can elegantly circumvent the data bandwidth limitation of the aforementioned multi-user MIMO system.

By way of example, some aspects of the disclosure configure the UEs 120.1-120.K to form a cluster in which the individual UEs 120.1-120.K are communicatively coupled together via a client device fronthaul network 102, which can comprise any of various types of local area wireless networks, including (but not limited to) wireless personal area networks, wireless local area networks, short-range UWB networks, wireless optical networks, and/or other types of wireless networks. In some aspects, since the bandwidth of the client device fronthaul network 102 is typically much greater than that of the WWAN, a UE 120.1-120.K can share its access to

the RAN (i.e., its WWAN spatial subchannel, or coherence zone) with other UEs 120.1-120.K in the cluster, thus enabling each UE 120.1-120.K to enjoy up to a K -fold increase in instantaneous data bandwidth.

In some aspects, otherwise inactive UEs can share their WWAN access with active UEs in the cluster. Since the activity factor of an active UE is typically a small fraction, an active UE can share its unused WWAN spatial subchannel with other UEs in the cluster. In addition to access to higher data bandwidth, there can be other incentives for a UE to cooperate in a cluster, including (but not limited to) lower power consumption (such as due to client-side antenna array gain), improved coverage and reliability, as well as other benefits and incentives.

In some aspects, a cluster of UEs can perform cooperative subspace demultiplexing. In some aspects, the cluster can perform cooperative subspace multiplexing by coordinating weighted (i.e., pre-coded) transmissions to produce localized coherence zones at other clusters and/or at the base transceiver stations 101.1-101.N. In some aspects, the UEs 120.1-120.K comprise a distributed computing platform configured to perform distributed processing (and optionally, other cloud-based services). Distributed processing may be performed for Cooperative-MIMO, other various SDR functions, and/or any of various network control and management functions.

FIG. 2 is a block diagram of a communication network in accordance with another exemplary aspect of the disclosure. Similar features depicted in FIG. 1 have the same reference numerals. In FIG. 2, the concept of a relay node is introduced. By way of example, a relay n 101.n comprises an antenna system 109.n and is communicatively coupled to at least one base transceiver station (such as BTS (1)) via a fronthaul network, which may be fronthaul 105 or a separate fronthaul 107. Similarly, a relay k 120.k is depicted as being communicatively coupled to a cluster of UEs 120.1-120.K via fronthaul 102. The relay k 120.k may be coupled to other network nodes via other fronthauls (such as fronthaul 105).

In one aspect, a relay is a dedicated relay node, such as may be configured specifically to operate as part of the WWAN infrastructure. In another aspect, a relay is an abstraction which denotes any of various devices that is configurable to operate as a relay node, as a member of a UE

cluster, and/or as a member of server-side (e.g., BTS) antenna system (e.g., in a base transceiver antenna cluster). In some aspects, a relay can be a UE. In some aspects, a relay can be a base transceiver station. For example, relay n 101. n may be a UE configurable to cooperate with base transceiver station 101.1, such as to increase the rank of the antenna system's 102.1-102. M_1 channel matrix. Relay k 120. k can comprise a base transceiver station configurable to communicate with a UE cluster 120.1-120. K via its fronthaul 102, and/or increase the rank of the cluster's channel matrix. In some aspects, a relay can simultaneously operate in multiple clusters. For example, a relay could operate in multiple UE clusters. In some aspects, a relay can operate as both a UE and a base transceiver station (or as a component of a base transceiver station's antenna system).

As disclosed in the patents and patent applications incorporated by reference herein, and particularly with respect to aspects of Cooperative-MIMO systems and methods, network nodes can function as either or both clients and servers. Furthermore, when wireless network nodes cooperate in subspace processing, they can create network resources, such as subspace (i.e., spatial multiplexing) channels, performance gains, RAN coverage area, etc. Even when UEs cooperate as a client array (e.g., a UE cluster) in a Cooperative-MIMO implementation, each UE can improve the data bandwidth, quality of service, range, and power efficiency of the other UEs in the array, or cluster. Thus, in some aspects of a Cooperative-MIMO system, UEs can extend the network infrastructure, such as to increase per-client data bandwidth, the number of clients served, coverage area, and/or quality of service without requiring substantial capital outlays from network operator to upgrade the base station network.

In Cooperative-MIMO systems, mobile UEs can opportunistically join together via a peer-to-peer overlay network (e.g., fronthaul 102) for client-side MIMO processing. In some aspects, UEs can join base transceiver arrays via an overlay network (e.g., fronthaul 107) to assist in server-side MIMO processing. Due to random movement of UEs, aspects of the disclosure do not impose a particular structure on the overlay network. Because there is no structure globally imposed upon them, unstructured networks are easy to build and allow for localized optimizations to different regions of the overlay. Also, in such aspects, because the role of all

peers in the network is the same, unstructured networks can be highly robust in the face of high rates of churn (i.e., when peers are frequently joining and leaving the network).

FIG. 3 is a block diagram of a network topology, the type of which can be employed in accordance with aspects of the disclosure. In this network topology, a plurality of nodes (e.g., nodes 301.1-301.N) are communicatively coupled together via communication links (such as depicted by networks 301-305), which form a network fabric. The depiction of “nodes” is a generalization, as the nodes 301.1-301.N can comprise server-side devices, client-side devices, relay devices (or other intermediate devices), and/or combinations thereof.

A network fabric can comprise a switched fabric, which is a network topology in which nodes 301.1-301.N connect via one or more network switches. Switches in a switched fabric can form a mesh network. While switched fabrics are typically associated with fibre channel switched fabrics, which use fibre channel switches, aspects of the disclosure include network fabrics with wireless links between at least some of the nodes. These wireless links can be radio channels, infrared, and/or free-space optical channels.

A network topology describes the arrangement of nodes and links of a communication network, and can comprise either or both a physical topology and a logical topology. The physical topology conveys the location of each node and characteristics of the links, and can include distances between nodes, node interconnections, transmission rates, signal types, and other physical-layer attributes. The logical topology conveys the data flows within a network, which can be independent of the physical design.

In some aspects, at least some of the nodes 301.1-301.N in the network fabric can comprise aerial platforms, such as unmanned aerial vehicles (UAVs). By way of example, mobile radio communication services (such as a radio access network (RAN)) can be provided by using a network fabric comprising UAVs configured for network fronthaul and/or backhaul operations. The use of such mobile aerial platforms can be advantageous when there is a need to quickly deploy a radio network and/or dynamically adapt to changing user-demand topologies.

With the use of broadband data links between nodes in an aerial network fabric, such as can be implemented via short-range wideband radio, infrared, and/or free-space optical links, data rates over the network fabric can be commensurate with computer bus speeds. Not only can the aerial network fabric serve as the fronthaul and/or backhaul to enable the RAN's data transport, the aerial network fabric can serve as a computing bus that connects computing elements (and other resources) residing on different network nodes to support other applications.

In one aspect, each node 301.1-301.N manages its contribution of shared resources for performing at least one other application while performing its RAN data transport duties. The other application(s) could include remote sensing or other various environment-monitoring operations, transcoding or other various media-processing operations, network security operations, content delivery management, client-device services (e.g., cloud storage, cloud computing, software-as-a-service, navigation, etc.), and/or RAN-supporting applications (e.g., Cooperative-MIMO, error detection/correction, coding/decoding, etc.).

Each application can comprise a combination of a routing topology, a storage topology, and a computation topology. In one aspect, one or more of the networks 301-305 corresponds to a topology for a particular application. By way of example, a storage topology can comprise storage devices distributed across multiple network nodes, and the storage topology can comprise a routing topology that is specific to accessing the storage devices for cloud storage on the multiple network nodes. The routing topology for cloud storage is typically different than the routing topology for RAN data transport. Thus, each node may comprise separate routing cores dedicated to different routing topologies. Similarly, each node may comprise separate storage devices, such as one set dedicated to RAN data transport and another set dedicated to a cloud storage application.

By way of example, a computation topology can comprise computing elements distributed across multiple network nodes. In one aspect, such as depicted in FIG. 3, a system of resources 311 (such as a network of nodes) can be abstracted as a single node in a given topology. In some aspects, virtual nodes 311.1-311.N (where N represents the number of virtual nodes) are an abstraction that conceals a corresponding underlying physical architecture, which can comprise

multiple hardware components communicatively coupled together. The hardware components of a virtual node 311.1-311.N might change during an application, such as to scale to demand for various resources (e.g., computational processing, memory, routing, etc.). Similarly, the network topology 315 might change for any of various reasons. In some aspects, the network 315 is a hidden (or concealed) network, such as a Tor network. In one aspect, a gatekeeper node (such as node 311.9) indicates the availability of certain services to the other nodes 301.1-301.8 or to specific applications while concealing from those nodes 301.1-301.8 or applications information as to how those services are acquired or arranged. In some aspects, certain services are only available to nodes within a subnetwork and are concealed from nodes outside the subnetwork. In some aspects, the network 315 comprises a virtual network overlay to a physical network. In some aspects, a virtual node 311.1-311.N (and/or network) may comprise nodes 301.1-301.8 (and/or components thereof), groups of nodes 301.1-301.8, other network resources, and/or subnetworks 301-305 (or portions thereof).

The computation topology for one application, such as RAN data transport, can be different from the computation topology used for another application. Furthermore, the computation topology can comprise a storage topology and a routing topology that are different for each application. Thus, a distributed application can employ a topology comprising dedicated apparatus-level components on different nodes 301.1-301.9, but operating together to support the application's requirements. Each instantiation of the distributed application can comprise a unique set of the apparatus-level components, and thus may employ a corresponding unique topology.

In accordance with certain aspects, a distributed computing problem can be partitioned by a combination of processes, including (but not limited to) data partitioning and computation partitioning. A first network topology can be provisioned to perform a first one of the processes and a second network topology can be provisioned to perform a second one of the processes. By way of example, the first network topology is configured to perform processing associated with data partitioning, and the second network topology is configured to perform processing associated with computation partitioning. Computation processing can be further partitioned into tasks which may be provided with their own network topologies. It should be appreciated that network topologies can be tiered. For example, a topology corresponding to a data partition may

comprise multiple subnetwork topologies corresponding to computation partitions, and a computation partition may include further partitions implemented by corresponding subnetworks. It should also be appreciated that subnetwork topologies can overlap, and a device or network configured to operate in one network topology may be configured to perform (simultaneously, or in alternative time intervals) processing corresponding to another network topology. As network topologies can comprise overlapping and/or tiered topologies, in some aspects, solutions provided by a set of subnetwork topologies can be processed by a processors in an encompassing network topology, and processors in the subnetworks can be directed to a next problem in a queue and/or redirected to solve different problems. In some aspects, network topologies can be adapted, such as to adapt to corresponding processing needs. In some aspects, the topologies change as problems are completed and/or processing for new problems is commenced.

Due to the deployment of multiple UAVs to provide fronthaul and/or backhaul support for the RAN, a system for managing navigation is typically employed, which can include various combinations of centralized and decentralized air traffic control. One promising technique uses swarm intelligence.

Swarm intelligence refers generally to the collective behavior of multi-component systems that coordinate using decentralized controls and self-organization. From an engineering point of view, swarm intelligence emphasizes the bottom-up design of autonomous distributed systems that can provide adaptive, robust, and scalable behaviors. While conventional distributed air traffic control techniques provide only navigation management (e.g., collision avoidance, maintaining safe aircraft spacing, optimal routing, etc.), aspects of the invention introduce network fabric processing criteria into the navigation decision-making process. Thus, navigation may be adapted to desired network topologies for various applications. Such adaptations to a UAV's navigation decision-making may take the form of self-organizing control signals, control signals from a UAV acting as a cluster leader or local master, and/or from a ground-based processing system providing for coordinated multipoint control.

By way of example, in a MIMO wireless communication system, the arrangement of scatterers in the transmission channel affects the system's capacity (e.g., L. Hanlen, M. Fu, "MIMO Wireless Systems: Capacity Limits for Sparse Scattering," 3rd AusCTW, Canberra, Australia, Feb. 2002, which is incorporated by reference in its entirety). Thus, UAV navigation can be configured to employ techniques to arrange active scattering platforms in a manner that enhances system capacity. In some aspects, it is recognized that UAVs can act as passive scatterers of RAN transmissions. In such aspects, UAV navigation can be adapted to produce any of various scattering structures, such as mirrors, lenses, and waveguides. These scattering structures can comprise active scattering structures, passive scattering structures, or combinations thereof.

In some aspects, swarm intelligence is configurable with respect to additional criteria, such as the aforementioned Cooperative-MIMO processing, network topology control, scattering management, and the like. For example, local navigation decision-making may be adapted to produce complex scattering structures. In some aspects, local navigation decision-making can be adapted to produce or shape a network topology. In such aspects, the local rule base employed for navigation by each UAV can be adapted such that complex structures and/or topologies can be achieved with minimal or no centralized control. In other aspects, at least a small amount of centralized control, whether from a ground-based controller or an airborne cluster master, may provide for at least some navigation control. Such centralized control and management can be configured with other control and management activities. By way of example, such centralized control may be configured with timing management operations, such as disclosed in the other patents and patent applications which are incorporated by reference. Thus, aspects of the disclosure include devices, methods, and cooperating systems of devices configured for performing aerial fabric acrobatics.

In accordance with aspects of the disclosure, precoding aspects (including devices, device components, systems of devices, methods, and instructions for configuring a processor(s)) are disclosed herein for use in a variety of network configurations, including cellular networks (such as LTE networks), WPANs, WLANs, ad-hoc peer-to-peer networks, and multi-hop networks, to advanced network configurations, such as any of the variety of Cooperative-MIMO networks and airborne networks disclosed herein. It should be appreciated that aspects disclosed herein,

including the precoding aspects, can be configured for any type of wireless network mentioned in any of the references incorporated herein.

FIG. 4A is a block diagram of a spread-OFDM transmitter in accordance with an aspect of the disclosure. A baseband data processor 401 generates original data symbols from user data, reference signals, or some combination thereof. A spreader 402 spreads the original data symbols into spread data symbols. A mapper 403 maps the spread data symbols to OFDM subcarriers, such as to input bins of an oversampled inverse discrete Fourier transform (IDFT) 404, which is typically implemented as an oversampled fast transform (e.g., an FFT). The spread-OFDM signal output from the IDFT 404 is prepended with a cyclic prefix (in “+CP” circuit 405) before amplification and up-conversion to RF in an RF front end 406. Inter-symbol interference can be avoided if the cyclic prefix (or a guard interval) is longer than the delay spread of the impulse response of the channel.

In spread-OFDM, N subcarriers can be shared by every original data symbol in a block of up to N original data symbols if the spreading codes are configured to be orthogonal. The spreader 402 enables the N subcarriers to be shared by a block of up to N original data symbols. In one aspect, the function of the spreader 402 can be explained as follows: Each original data symbol of the block is replicated into N parallel copies. Each copy is then multiplied by a code chip from a corresponding spreading signature. A spreading signature can comprise a row or column of a spreading matrix, and may be referred to as a spreading code or a code space. The products are summed such that each sum (referred to as a spread data symbol) comprises one of N linear combinations of the original data symbols, wherein the coefficients are the code chips (e.g., a row or column of a corresponding spreading matrix), and the unknowns are the original data symbols. Each spread data symbol is modulated onto one of the N subcarriers, all of which are to be transmitted in parallel. The usual implementation of OFDM calls for the IDFT 404 to convert the parallel chips into serial form for transmission. In OFDM, the IDFT 404 is typically implemented via oversampling, so the input symbol block to the IDFT 404 is typically zero-padded, since zero padding in one domain (e.g., time or frequency) results in an increased sampling rate in the other domain (e.g., frequency or time). The cyclic prefix is appended to

remove the interference between successive symbols and to accommodate the circulant convolution provided by the FFT.

In a receiver configured to receive spread-OFDM signals (such as the receiver block diagram depicted in FIG. 5A), a received spread-OFDM transmission is filtered, converted to baseband, and digitized by an RF front end 501, and then the cyclic prefix is removed (such as by a cyclic prefix removal circuit 502 or some equivalent). The receiver can comprise N matched filters, which can be implemented in the discrete baseband domain, such as by performing a DFT 503. The output of the DFT 503 has the form of the transmitted signal multiplied by a diagonal channel matrix whose diagonal values are flat-fading coefficients, which allows for simple equalization 504. The IDFT 404 and DFT 503 operations and the role of the cyclic prefix are implicitly absorbed through the diagonal structure of the channel response. Thus, aspects of the disclosure can provide for configuring the spreader 402 to provide various benefits, including (but not limited to) orthogonal codes, use of a fast-transform algorithm, and low PAPR.

In accordance with some aspects of the disclosure, a processor-based transceiver can include a non-transitory computer-readable memory with instructions stored thereon and configured to perform any of the algorithms disclosed herein. In reference to the spreader 402, by way of example, each original data symbol in a block can be multiplied by a complex-valued spreading code, such as via a matrix multiplication operation. For example, a j^{th} original data symbol d_j is multiplied by a j^{th} column vector of an $N \times N$ spreading matrix S , where the j^{th} column vector corresponds to the spreading code for symbol d_j , and N (which equals the number of subcarriers onto which the spread data is modulated) corresponds to the bandwidth expansion factor (e.g., spreading gain) to produce a j^{th} spread data-symbol vector. The N different spread data vectors are summed to produce a vector of spread data symbols (of length N) before serial-to-parallel conversion and processing by the IDFT. It should be appreciated that if fewer than N original data symbols (e.g., $n < N$) are in a block, then $N - n$ of the symbols in the block may be set to zero while still producing a length- N vector of spread data symbols.

FIG. 4B is a block diagram of a spread-OFDM spreader (such as spreader 402) in accordance with some aspects of the disclosure. An OFDM schedule processor 431 receives scheduling

information which assigns a set of OFDM subcarriers to the corresponding transmitter. For example, if the transmitter is a UE, then the OFDM network assigns specific resource blocks (which includes a set of OFDM subcarriers) to be used by the UE for uplink transmissions. The OFDM schedule processor 431 obtains subcarrier parameters (e.g., number of subcarriers N , subcarrier spacing, and the like) which are conveyed to a spreading code generator 432.

The spreading code generator 432 can be configured to process the subcarrier parameters and one or more criteria elements to select spreading codes. For example, the criteria can include code space orthogonality (i.e., orthogonal spreading codes), low PAPR, and enabling a fast transform operation for code generation and/or for encoding original data symbols. Other criteria may be employed. For example, a criterion which relates to pulse shaping (e.g., time-domain and/or frequency-domain shaping, or windowing) can further reduce PAPR by sacrificing some bandwidth efficiency. In one aspect, a mask (e.g., a spectral mask) may be applied to the subcarriers, such as by way of the coding or directly following the coding, in order to shape the spread-OFDM signal. This can achieve pulse shaping without directly processing the output of the IDFT 404.

In one aspect, spreading is achieved via a fast transform operation (such as an FFT spreader 433). The FFT spreader's 433 input parameters can be controlled by the spreading code generator in accordance with the criteria elements. In one aspect, FFT spreader 433 parameters, such as FFT size, input data block size, input data values, can be controlled by the spreading code generator 432. In some aspects, the spreading code generator 432 can select how a fast transform is performed, such as by directly controlling the transform's operations or by indirectly controlling the transform via FFT size, and the like.

In one aspect, a user data processor 435 provides user data symbols to the spreader 433 for spreading. In another aspect, a reference signal data processor 437 provides reference signal data symbols to the spreader 433 for spreading. In some aspects, the user data processor 435 and the reference signal data processor 437 are configured to multiplex user data and reference signal data to produce the original data symbols, which are then spread by the spreader 433 to produce the spread data symbols.

Orthogonal spreading

In accordance with an aspect of the disclosure, in a client device (such as a UE) configured to operate in an OFDM network, the spreading-code generator 432 is responsive to OFDM scheduling that assigns a particular set of uplink subcarriers to the client device, such as based on favorable channel conditions between the client device and one or more base transceiver stations. For example, channel-dependent scheduling of the uplink subcarriers to the client device can be made to avoid interference, such as deep fades experienced by one or more subcarrier frequencies in a flat-fading environment, and/or interference caused by other transmitters. Responsive to the number of assigned uplink subcarriers, the spreading-code generator 432 selects a set of orthogonal complex spreading codes. Orthogonal functions (that is, signals or sequences) have zero cross-correlation. Zero correlation occurs if the product of two signals summed over a period of time (or sequence length) is zero. A set of signals or sequences in which all have zero cross-correlation with each other constitutes an orthogonal code space(s).

In one aspect, responsive to an assignment of N OFDM subcarriers, the spreading-code generator 432 selects an orthogonal $N \times N$ complex spreading matrix that comprises DFT coefficients. Some matrices comprising DFT coefficients are not orthogonal. While it is well known that some orthogonal functions can be generated or expanded using various algorithms, such as a seed algorithm or some other recursive technique, some of these algorithms do not provide codes with desirable features, such as orthogonality and low PAPR. For example, an $N \times N$ spreading matrix constructed by concatenating rows or columns of an $N/2 \times N/2$ DFT spreading matrix can yield fewer than N orthogonal spreading codes. Similar deficiencies result from concatenations and other combinations of different-size DFT matrices, permutations of DFT matrices, punctured DFT matrices, truncated DFT matrices, and the like. Thus, in some aspects, the spreading-code generator 432 advantageously provisions an $N \times N$ spreading matrix (or corresponding set of complex codes) to provide for N orthogonal spreading codes. This can be referred to as an orthogonal code space with dimension N .

In some aspects of the disclosure, the spreading-code generator 432 can orthogonally spread a block of up to N original data symbols with DFT-based complex spreading codes to produce a length- N vector of spread data symbols. In other aspects, the spreading-code generator 432 can employ complex spreading codes to spread $N' > N$ original data symbols onto N subcarriers. While these complex spreading codes are not all orthogonal, the codes can be configured to have low cross correlation. Various techniques may be employed to select a code set having optimal features, such as low cross correlation, low PAPR, or a combination thereof. In some aspects, at least some of the spreading codes can be orthogonal to each other.

Low PAPR

In addition to providing for orthogonal spreading, the spreading code generator 432 can be responsive to OFDM scheduling to configure the complex spreading matrix to provide the spread-OFDM signal with a low PAPR. Unlike other PAPR-reduction techniques (such as clipping, peak cancellation, and others) which employ the IDFT 404 output (i.e., the spread-OFDM signal), the spreader 402 employs complex orthogonal spreading codes to spread original data symbols (which provides frequency diversity gain) while shaping the spread-OFDM signal to provide low PAPR.

Parameters of the assigned subcarriers, such as subcarrier frequency spacing and the number of subcarriers, can be used to determine complex orthogonal spreading codes that also produce a low-PAPR signal at the IDFT output. By way of example, the spreading-code generator can generate an orthogonal $N \times N$ spreading matrix wherein N is the number of subcarriers assigned to the transceiver, and the complex values of the spreading matrix can be generated based on the configuration of the assigned subcarriers, such as frequency spacing.

In one aspect, responsive to an assignment of a block of contiguous subcarrier frequencies, the spreading-code generator 432 can generate a complex spreading matrix with constant-modulus (e.g., constant magnitude) polyphase values derived from a DFT. In another aspect, if the subcarrier assignment comprises non-contiguous subcarriers with different frequency spacings, the complex spreading matrix that provides for low PAPR might comprise values with different

magnitudes. Even in such aspects, the spreading-code generator 432 can generate a complex spreading matrix which achieves desired features corresponding to the criteria list, including low PAPR.

Fast Transforms

In accordance with some aspects of the disclosure, in a client device (such as a UE) configured to operate in an OFDM network, the spreading-code generator 432 is responsive to OFDM uplink scheduling to employ a complex spreading matrix that can be implemented via a fast transform algorithm. For example, based on a number of assigned OFDM subcarriers, an $N \times N$ complex spreading matrix can be selected in which the matrix-generation algorithm exploits the factorization of N . In some aspects, the number of assigned OFDM subcarriers equals N . In other aspects, a spreading matrix with dimension less than the number of assigned OFDM subcarriers might be selected, such as to facilitate spreading with a small sacrifice in data bandwidth, enable further PAPR reduction, or provide for other benefits. In some aspects, the scheduling is configured by the OFDM network such as to provide a number of assigned subcarriers that facilitates use of a fast transform algorithm by the spreading-code generator 432.

The implementation of the DFT spreading as a fast algorithm (e.g., an FFT) can provide an efficient alternative to conventional Carrier Interferometry (CI) coding. In some aspects, an OFDM transceiver can employ the same FFT processor (e.g., such as FFT spreading module 433, which can be an application-specific processor, a general purpose processor programmed to perform an FFT, or some other hardware configured to perform an FFT) and/or reuse a software program configured to perform spreading to perform other transceiver functions, such as OFDM modulation (e.g., IDFT 404) and/or demodulation (e.g., DFT 503). In such aspects, a common FFT hardware (e.g., module 433, 404, 503, or 505) or software module (e.g., program, object, function, or some other program construct) can be configured to adjust FFT processing parameters, such as relative to whether the FFT is being used for spread-OFDM coding, spread-OFDM decoding, OFDM modulation, or OFDM demodulation. FFT processing parameters can include one or more of oversampling factor, sampling rate, FFT length, zero-padding, truncating, modulo-length data wrapping, Radix-2 implementation, FFTW implementation, decimation in

time, decimation in frequency, output ordering, input data format, rounding mode, saturate on integer overflow, sine table data type, product output data type, accumulator data type, output data type, output minimum, output maximum, and lock data type. Other FFT processing parameters can be employed.

A fast DFT algorithm, such as the Cooley-Tukey algorithm, can express a DFT of size $N = N_1 N_2$ in terms of smaller DFTs of size N_1 and N_2 recursively to reduce the computation complexity to order of $N \log N$ for highly composite N (e.g., smooth numbers). The 2-smooth numbers are powers of 2 (i.e., a number of the form 2^n where n is an integer). Radix-2 implementation can comprise various algorithms, including (but not limited to) butterfly operation, double-signal algorithm, half-length algorithm, decimation-in-time algorithm, and decimation-in-frequency algorithm.

Since the Cooley-Tukey algorithm breaks the DFT into smaller DFTs, it can be combined with other DFT algorithms. For example, Rader's algorithm, Bluestein's algorithm, Bruun's algorithm, or other FFT algorithms can be used to handle large prime factors that cannot be decomposed by Cooley-Tukey, or the prime-factor algorithm can be exploited for greater efficiency in separating out relatively prime factors.

In many OFDM systems, the number N of subcarriers assigned to a transceiver is commonly a power of 2, which enables efficient OFDM modulation and demodulation. Thus, a radix-2 FFT of size N for DFT coding can also provides notable computational advantages. A processor for an OFDM transmitter configured to perform an IFFT, for example, can be easily configured to perform fast DFT spreading. Accordingly, some aspects of the disclosure employ a radix-2 DFT matrix to spread data symbols. This enables computationally efficient spreading, and like CI spreading, when the spread-DFT data is input to selected bins of an IFFT used in an OFDM transmitter, the resulting spread-DFT OFDM signal can have a low PAPR.

In accordance with some aspects of the invention, in an OFDM transmitter apparatus, a radix-2 DFT spreader (e.g., spreader 402) and the subcarrier mapper 403 are configured in a manner such that the combination of DFT spreading and subcarrier allocation produces a transmitted

OFDM signal with low PAPR. By way of example, the size N can equal the number of subcarriers allocated to the OFDM transmitter apparatus, and wherein the allocated subcarriers are uniformly spaced in frequency. The allocated subcarriers can comprise a block of contiguous subcarriers, such as may be assigned to the OFDM transmitter apparatus based on favorable channel conditions between the OFDM transmitter apparatus (e.g., a UE) and at least one server-side WWAN terminal (e.g., a base transceiver station). A determination of favorable channel conditions may be made by either or both the OFDM transmitter apparatus and the at least one server-side WWAN terminal (including a scheduler communicatively coupled to multiple WWAN terminals) and may be based on measurements and/or estimates of the channel at either or both the OFDM transmitter apparatus and the at least one re server-side WWAN terminal.

A processor for an OFDM receiver configured to perform an FFT, for example, might be configurable to perform the DFT spreading. In some aspects, the receiver processor does not normally operate while its associated transceiver device is in transmit mode, so the receiver's FFT is available to support transmit processing, such as to provide for the DFT spreading. In some aspects, the transmitter may employ the same processor to perform both DFT spreading and the IFFT. Such implementations can provide various benefits (e.g., reduce complexity, improve efficiency, reduce cost, reduce power consumption, etc.) by employing the same hardware to perform both spreading and OFDM modulation. With regard to software, such implementations disclosed herein can enable code reuse. In some aspects, pipelined FFT processing can be provided. By way of example, pipelined processing can be configured to provide multiple simultaneous FFT operations, such as DFT-spreading and subcarrier modulation (e.g., via IFFT). In some aspects, pipelined processing can be performed as part of cooperative processing between multiple processing cores (such as in a data center), or residing on different WWAN terminals (e.g., UEs and/or base transceiver stations) in a cooperating cluster.

In accordance with other aspects of the disclosure, an FFT processor configured for at least one transmitter operation can be configured for a receiver operation. In some aspects, a single FFT processor can be employed to enable multiple operations, including any combination of OFDM modulation, OFDM demodulation, DFT spreading, and DFT de-spreading.

In accordance with some aspects of the disclosure, the block diagram shown in FIG. 4A comprises the transmitter part of a UE configured to transmit an uplink spread-OFDM signal with low PAPR, and the block diagram in FIG. 5A comprises the receiver part of a server-side WWAN device (or system) configured to receive the UE's uplink spread-OFDM signal. In the server-side WWAN device (or system), an RF front-end system 501 filters, amplifies, down-converts, and digitizes the received spread-OFDM signal to produce a received baseband signal. The cyclic prefix is stripped (in "CP" circuit 502) and the OFDM signal is demodulated by the DFT 503. Equalization and demapping 504 (which can include soft and/or hard decision processing) produces received spread-OFDM symbols. The de-spreader 505 can comprise an IFFT to efficiently de-spread DFT-spread symbols to produce estimates of the original data symbols. The baseband processor 506 performs additional down-stream baseband processing on the estimates, such as error detection, error correction, transcoding, formatting, and/or other post-processing operations.

FIG. 5B is a block diagram that depicts a portion of a receiver, such as a receiver that may be employed in a server-side WWAN terminal or system. In one aspect, the de-spreader 505 comprises the system shown in FIG. 5B. A de-spreading code generator 552 processes subcarrier parameters corresponding to the received spread-OFDM signal to control decoder 553. Since the server side of the WWAN can schedule the uplink OFDM subcarriers used by each UE, the subcarrier parameters can be retrieved from a UE scheduler 551.

In some aspects, the UE scheduler 551 assigns uplink subcarriers to a UE based on favorable channel conditions for that UE (which is referred to as channel-dependent scheduling). In addition to favorable channel conditions, a criteria list employed by the UE scheduler for assigning uplink subcarriers might include providing for orthogonal spreading codes, enabling spreading codes that produce a transmitted spread-OFDM signal with low PAPR, and/or enabling a fast transform to be used for spreading and de-spreading. While channel-dependent scheduling might identify a particular group of candidate subcarriers to be assigned to a UE uplink channel, the other criteria can specify the number N of subcarriers, the subcarrier spacing, as well as other signal parameters assigned by the scheduler 551. For example, selecting N to be

a power of 2 can enable certain fast transforms to be used in spreading and/or de-spreading. Selecting contiguous subcarriers or uniformly spaced subcarriers can facilitate (and possibly ensure) the UE's implementation of orthogonal spreading codes that provide low PAPR features.

In one aspect, a de-mapped data processor 555 can provide spread data symbols comprising spread user data symbols, spread reference signals, or both to the decoder 553. The decoder 553 can employ a fast transform, such as an IFFT, to de-spread the spread data symbols and produce de-spread data symbols which are output for further processing. The de-mapped data processor 555 may be part of the equalizer and de-mapper 504 or it may be part of the de-spreader 505.

DFT-Spreading Method:

In accordance with one aspect of the disclosure, as depicted in FIG. 6A, a method performed in a radio transceiver is provided, which can employ a fast algorithm to generate a spread data sequence from an original data sequence. The algorithm which generates the spread data sequence is configured to provide a low PAPR to an OFDM signal modulated with the spread data sequence. Specifically, the spreading causes the transmitted OFDM signal (such as a signal output from IDFT 404) to have a low PAPR compared to an un-spread OFDM signal (such as the resulting transmitted OFDM signal if spreading is not performed).

In some aspects, the method depicted in FIG. 6A comprises functional steps implemented via software instructions operable to cause a processor (such as a general-purpose processor) to execute the steps in a process which produces a spread-OFDM signal. In some aspects, one or more of the functional steps are embodied in hardware, such as circuits.

By way of example, application-specific integrated circuits (ASICs), field-programmable gate arrays (FPGAs), and/or other circuits can be provided as embodying one or more of the functional steps disclosed throughout the specification and depicted in the drawings. In some aspects, multiple ones of the functional steps can be implemented by a common processor or circuit. For example, certain efficiencies might be achieved by configuring multiple functional steps to employ a common algorithm (such as an FFT and/or some other algorithm), thereby

enabling a circuit, a processor, or some other hardware component to be used for different functions, and/or enabling software instructions to be shared for the different functions.

The radio transceiver, such as a UE, receives an OFDM channel assignment 601 from a scheduler in the WWAN. For example, OFDM channels in the WWAN might be assigned via channel-dependent scheduling. The OFDM channel assignment is processed to acquire OFDM subcarrier parameters pertinent to operation of the transceiver 602. Based on the subcarrier parameters, orthogonal spreading codes are configured in a manner to cause a corresponding spread-OFDM signal to have low PAPR 603. For example, the spread-OFDM signal is configured to have a lower PAPR than if spreading was not performed. Configuring the spreading codes in accordance with step 603 can comprise a combination of a) determining a spreading code length(s) based on the number of subcarriers assigned to the transceiver; b) determining spreading code values based on the spreading code length(s) and the configuration of subcarriers (e.g., subcarrier spacing) assigned to the transceiver; and c) arranging the spread data symbols (which can include re-ordering the output of a spreading function) in a particular order or arrangement such that each spread data symbol maps to a particular one of the assigned subcarriers to achieve at least one objective, such as to provide the spread-OFDM signal with a low PAPR.

In aspects of the disclosure, one or more spreading code parameters (such as code length) can optionally be configured to enable use of a fast spreading algorithm, such as an FFT, to perform spreading 604. In other aspects, the spreading codes may be retrieved from a memory and employed in a matrix multiply or equivalent operation. For example, spreading codes might be generated for different subcarrier parameters (e.g., number of subcarriers, subcarrier spacing, and the like), possibly using a fast spreading algorithm, and stored in the memory. Then spreading codes corresponding to particular subcarrier parameter(s) can be retrieved from the memory to be used in spreading 604.

Code parameters, such as code length and the code values, can be selected to allow a fast algorithm (such as the FFT) to be used for spreading-code generation and/or to spread original data symbols, such as via a fast transform. This can include selecting a block size of input

original data symbols (and corresponding spreading matrix dimension) to facilitate use of a fast transform and/or achieve other processing efficiencies. In some aspects, zero values can be added to the block of original data symbols to provide a predetermined block size.

By way of example, but without limitation, a spreading code matrix can comprise complex spreading codes selected from a larger set of spreading codes, such as CI codes, which are complex spreading codes that exist for any code length. For example, restricting the code length (or matrix dimension) N to a length that is a power of 2 enables a specific set of spreading code values that permit a fast transform algorithm (such as a radix-2 decimation-in-time (DIT) FFT) to be employed as the spreading algorithm 604. In other aspects, N can be selected to equal a product of small prime numbers which can include numbers other than 2.

Selecting the code length and the code values (such as specific code values corresponding to particular OFDM subcarriers assigned to the radio transceiver) can provide for configuring the spreading code 603 to produce a spread-OFDM signal (at the output of step 606) with low PAPR. For example, in one aspect, an OFDM network might employ non-contiguous blocks of subcarriers (such as for opportunistic transmissions, cognitive radio applications, channel optimization, and/or for other purposes). Thus, the code values (and optionally, the code length) can be selected 603 to provide a low PAPR to the resulting transmitted OFDM signal. The code values and code length can also be selected to affect the orthogonality of the codes as part of step 603, such as to provide orthogonal codes, sacrifice orthogonality for lower PAPR, sacrifice bandwidth efficiency for lower PAPR, or some combination thereof.

The spread data symbols are mapped to particular OFDM subcarriers 605. In some aspects, mapping 605 comprises sequence reordering to map specific spread symbols to specific subcarriers, which can achieve certain advantages. For example, a preferred mapping of the spread data symbols to the OFDM subcarriers achieves the low PAPR, whereas an alternative mapping may not. Even when contiguous subcarriers and spread-DFT or CI codes are employed, the selection of the spreading codes 603 and the mapping 605 affects the PAPR. A proper mapping 605 of the spread data symbols to specific subcarriers achieves the low PAPR.

In one aspect, besides the trivial case of all ones, a spread-DFT code (which is a constant-modulus complex code) can be regarded as comprising a uniform phase increment in the complex plane from one code value to each successive value in the DFT code vector. In the trivial case, the phase increment is zero. Each spread data symbol comprises a sum of the products of each original data symbol with a code value from the original data symbol's corresponding spread-DFT code. This spreading can be implemented via a matrix multiply, such as between a spreading code matrix and a vector of original data symbols. The spreading can be implemented via a DFT, such as an FFT. However, the spread data symbols are markedly different from the frequency responses derived from a spectrum analyzer, which also uses a DFT.

Each spread data symbol comprises a linear combination of the original data symbols, wherein each coefficient in the linear combination comprises the code value corresponding to the original data symbol's code and a common location in the code vector of that code. Stated another way, consider an n^{th} original data symbol d_n spread by a corresponding n^{th} DFT spreading vector $\mathbf{c}_n = [c_{n1}, c_{n2}, \dots, c_{nm}, \dots, c_{nN}]$. An m^{th} spread data symbol in a spread data symbol vector $\mathbf{x}$ is the sum, $x_m = \sum_{n=1}^N c_{nm} s_n$, which indicates that the m^{th} spread data symbol is the sum of each data symbol s_n multiplied by the m^{th} code value in its corresponding code vector $\mathbf{c}_n$. The m^{th} code value c_{nm} represents the m^{th} uniform phase increment in the complex plane for that code $\mathbf{c}_n$. Thus, the m^{th} spread data symbol can be associated with an m^{th} set of uniform phase increments. Spreading yields N spread data symbols, whereas spectrum analysis (which uses a DFT) produces frequency responses corresponding to $N/2$ (orthogonal) tones due to the Nyquist limit.

In one aspect, the mapping 605 comprises arranging the spread data symbols in accordance with increasing uniform phase increments, and matching the spread data symbols according to this arrangement to a set of OFDM subcarriers having increasing uniform frequency increments. The mapping 605 of the spread data symbols having increasing uniform phase increments to the OFDM subcarriers with corresponding increasing frequency increments provides for producing a spread-OFDM signal with low PAPR. In serial implementations, arranging the spread data symbols can take the form of sequencing the symbols in ascending or descending order relative to their corresponding phase increments. In parallel implementations, arranging the spread data

symbols can take the form of arranging the symbols relative to input bins of an IFFT for corresponding increasing OFDM subcarrier frequencies. Thus, in some aspects, the mapping 605 can comprise sequence reordering of a DFT output.

In some aspects, the mapping 605 order of symbols to IFFT bins may be fixed. Thus, configuring the spreading codes 603 and/or spreading 604 may be provisioned to configure the mapping 605 which ensures a low-PAPR spread-OFDM signal. For example, configuring the spreading codes 603 can comprise arranging the order of values in a spreading code matrix to produce a vector of spread symbol values arranged in a manner that the fixed mapping 605 results in a spread-OFDM signal with low PAPR, the order relating to a mathematical relationship with the subcarrier frequencies that achieves the low PAPR regardless of the arrangement of the original data symbols. In another aspect, the spreading 604 is configured to arrange the spread data symbols in a manner that the mapping 605 results in a spread-OFDM signal with low PAPR regardless of the order of the original data symbols.

In accordance with some aspects of the disclosure, such as in relationship to methods, software instructions, and devices which perform step 603, the code length N can correspond to a number of OFDM subcarriers allocated to the radio transceiver. For example, the code length N might equal the number of OFDM subcarriers, which is commonly a power of 2. In some aspects, the code length N might be less than the number of assigned OFDM subcarriers. In other aspects, the code length N might be greater than the number of OFDM subcarriers, such as a multiple thereof. In some aspects, the code length N might equal the number of OFDM subcarriers assigned as user-data channels for the radio transceiver. In some aspects, the code length N might equal the number of OFDM subcarriers assigned as reference signals for the radio transceiver. In some aspects, unlike in conventional spread-OFDM, transmitted reference signals are spread. In some aspects, the reference data can be spread with the user data.

In one aspect, an $N \times N$ spreading code matrix is selected wherein N is a power of 2 and the code matrix values are selected from the set of basic CI code values to permit use of a radix-2 FFT for spreading a set of original data symbols. The CI coding may be provided via a DFT in order to provide for DFT spreading, which can be implemented by a fast transform, such as an FFT. The

input to the radix-2 FFT can comprise a block of up to N original data symbols, and the fast spreading algorithm generates N spread data symbols.

At least one of an original data sequence length and a spread data sequence length is selected to enable use of a fast DFT transform. By way of example, the original data sequence length can equal the spread data sequence length, and this length can be selected to be a power of 2, which permits a radix-2 decimation-in-time (DIT) FFT to spread the original data sequence.

It should be appreciated that in alternative aspects, the spreading code matrix need not be a square matrix. In some aspects, the spreading codes can comprise alternative complex-valued code families, and the code values and code length can be selected to permit use of a fast spreading algorithm to spread the original data symbols and provide a resulting transmitted spread-OFDM signal with low PAPR.

Various types of fast spreading algorithms can be employed to spread the original data symbols to produce spread data symbols. In some aspects, the fast spreading algorithm comprises a DFT spreading operation.

The DFT spreading operation is defined by

$$x_k = \sum_{n=0}^{N-1} s_n e^{-i2\pi nk/N}$$

Where x_k represents the k^{th} spread data symbol, s_n are the original data symbols, and N is the length. In this example, both the index k and the index n range from 0 to $N-1$.

The Radix-2 DIT FFT computes the DFTs of the even indexed inputs ($s_{2m} = s_0, s_2, \dots, s_{N-2}$) and the odd indexed inputs ($s_{2m+1} = s_1, s_3, \dots, s_{N-1}$), and then combines the results to produce the DFT-spread data sequence. For example, the Radix-2 DIT algorithm expresses the DFT-spreading of original data symbols s_n as a sum of spread even-numbered indices ($n = 2m$) and spread odd-numbered indices ($n = 2m+1$):

$$x_k = \sum_{m=0}^{N/2-1} s_{2m} e^{-i2\pi(2m)k/N} + \sum_{m=0}^{N/2-1} s_{2m+1} e^{-i2\pi(2m+1)k/N}$$

The common multiplier $e^{-i2\pi k/N}$ can be factored out of the second sum, so the spread data symbols can be represented as:

$$x_k = x_{\text{even}(k)} + e^{-i2\pi k/N} x_{\text{odd}(k)}$$

Where $x_{\text{even}(k)}$ is the even-indexed part, and $x_{\text{odd}(k)}$ is the odd-indexed part of x_k .

Due to the periodicity of the DFT, $x_{\text{even}(k+N/2)} = x_{\text{even}(k)}$ and $x_{\text{odd}(k+N/2)} = x_{\text{odd}(k)}$. Thus,

$$x_k = \begin{cases} x_{\text{even}(k)} + e^{-i2\pi k/N} x_{\text{odd}(k)} & \text{for } 0 \leq k < N/2 \\ x_{\text{even}(k-N/2)} + e^{-i2\pi k/N} x_{\text{odd}(k-N/2)} & \text{for } N/2 \leq k < N \end{cases}$$

Since the “twiddle” factor $e^{-i2\pi(k+N/2)/N} = -e^{-i2\pi k/N}$, this reduces the number of these calculations by half. The spread sequence of length- N can be expressed recursively in terms of two spreading operations of size $N/2$ ($0 \leq k < N/2$)

$$x_k = x_{\text{even}(k)} + e^{-i2\pi k/N} x_{\text{odd}(k)}$$

$$x_k = x_{\text{even}(k)} - e^{-i2\pi k/N} x_{\text{odd}(k)}$$

This decimation operation can be performed down to the 2×2 DFT. The final outputs are obtained by a +/- combination of $x_{\text{even}(k)}$ and $e^{-i2\pi k/N} x_{\text{odd}(k)}$, which is simply a size-2 DFT.

It should be appreciated that other fast algorithms may be employed, including algorithms that exploit symmetry, remove redundant parts of a computation, and/or achieve other efficiencies, as well as other divide-and-conquer algorithms.

It should be appreciated that in practice, the actual performance of a fast algorithm depends on additional factors which affect computation speed, memory use, power consumption, and various processing overheads, such as communications between processors. In some aspects, in-place algorithms, bit reversal, data reordering, non-blocking pipelined configurations, and the like can be implemented in the fast algorithm. As such, operations of the fast algorithm can be configured to employ the required mapping that achieves the lowest possible PAPR for a given code set.

In some cases, performance metrics depend on the computing architecture employed. Thus, in accordance with some aspects of the disclosure, in addition to configuring the fast spreading algorithm 503 to improve performance on a given computing architecture, configuring the spreading code parameters to enable use of a fast spreading algorithm 501 can include selecting and/or adapting the spreading code parameters in a manner that improves the performance of the fast spreading algorithm.

In OFDM, active subcarriers are typically assigned with data symbols. For unassigned subcarriers, OFDM provides for zero-valued inputs for the IFFT (transmitter) and zero-valued outputs for the FFT (receiver). Often, conventional FFT/IFFT algorithms are not efficient due to the unwanted operations on zero values. Therefore, in some aspects of the disclosure, efficient FFT/IFFT algorithms can be employed to dynamically eliminate the multiplication and addition operations associated with deactivated subcarriers. For example, FFT pruning methods eliminate operations on input and output values which are not required. The basic concept involves determining the index of the butterflies to be chosen for computations and those to be discarded. Thus, FFT computation time can be significantly reduced by pruning the operations on zero values in the discarded butterflies. Most of these algorithms are suitable for applications with specific zero-input or zero-output pattern distributions. These types of efficient algorithms can be used in the FFT spreading and/or IFFT de-spreading operations, such as when zero-valued inputs and/or outputs are employed.

FIG. 6B is a flow diagram that can be employed in accordance with various aspects of the disclosure, such as for processing received spread-OFDM signals. In one aspect, for example, the method depicted in FIG. 6B is performed by a server-side device or system in a WWAN. A scheduler in the WWAN arranges OFDM assignment blocks in a manner that facilitates low-PAPR spreading 611. Different block sizes may be allocated to accommodate different data rates. For example, if the blocks are configured such that resources assigned to a UE comprise contiguous (or otherwise equally spaced) OFDM subcarriers, then this can facilitate uplink spreading (by the UE) which achieves a low-PAPR spread-OFDM signal.

In some aspects, the scheduler arranges the OFDM assignment blocks in a manner that facilitates fast transforms to be employed for spreading (and, optionally, de-spreading) 612. For example, the number of OFDM subcarriers in each block might be selected to equal a product of small prime numbers. In some aspects, the block sizes are configured to enable a Radix-2 DIT FFT for spreading (and optionally, a Radix-2 DIF IFFT for decoding).

As described herein and in patents and applications incorporated by reference, the uplink OFDM subcarriers can be assigned for use by the UEs 613, such as via channel-dependent scheduling. The server-side device or system typically demodulates received uplink OFDM signals 614 by using a DFT, such as an FFT. Demodulation 614 can include equalization. In some aspects, the demodulated symbols, which are DFT-spread data symbols, are de-mapped 615, such as via an OFDMA de-multiplexer, which separates the received uplink signals by UE. Thus, for each UE, a received uplink signal can be de-spread by determining the de-spreading codes based on the UE's channel assignment (which indicates the number of OFDM subcarriers and the subcarrier spacing) 616, followed by employing a fast algorithm (e.g., an IFFT) configured to de-spread the spread data symbols 617.

FIG. 7A is a flow diagram that depicts a method for generating spread-OFDM signals in accordance with some aspects of the disclosure. Responsive to the subcarrier assignment and/or selection, the spreading code parameters can be configured to enable use of a fast spreading algorithm 701 and configured to produce a transmitted spread-OFDM signal with low PAPR 702. The fast spreading algorithm, such as an FFT, is configured to spread the original data symbols with orthogonal spreading codes to produce the spread data symbols 703, which are then mapped to an IFFT 704. The IFFT modulates the spread data symbols onto the assigned (or selected) OFDM subcarriers to produce a spread-OFDM signal 705. The spreading 703 and the IFFT 705 can each employ one or more of the FFT pruning methods, including modified FFT pruning, partial FFT pruning, split-radix FFT pruning, or traced FFT pruning. In some aspects, such as in hardware implementations of FFTs, a transform decomposition can be performed.

In accordance with some aspects of the disclosure, instead of separately calculating the spreading 703 and IFFT 705, both transforms are combined into a single transform. In one aspect, this can

be accomplished by using a unified butterfly so that the number of arithmetic operations, delays, and indexing are reduced. One approach can employ an algorithm based on a sparse matrices factorization method, such as via the Kronecker product technique. In another aspect, the spreading 703 and IFFT 705 are combined into a single fast transform that comprises a fast orthonormal unitary transform. The aforementioned techniques for spreading and OFDM modulation can also be adapted for OFDM demodulation and de-spreading operations.

In accordance with some aspects of the disclosure, non-contiguous subcarriers can be employed, such as due to assignment of non-contiguous OFDM subcarriers to the radio transceiver or due to selection of a subset of subcarriers (e.g., reference signals or user data signals) to be provided with separate coding from the rest of the subcarriers. In such aspects, one or more of the steps in FIG. 7A can be configured accordingly. In some cases, certain trade-offs can be made between PAPR, orthogonality, and/or bandwidth efficiency.

In one aspect of the disclosure, the spread data symbols are critically sampled (one sample per information symbol/subcarrier) and grouped in information signal blocks of length N . By way of example, but without limitation, the spread data symbols are generated at the critical sampling rate $f_s = 1/T_s$ and modulated 705 onto the N orthogonal subcarriers during a time interval defined for one OFDM symbol with period N/f_s . In practice, the output of the IFFT 705 is a well-interpolated baseband signal. For example, oversampling in the time domain is usually achieved via frequency-domain interpolation, which is achieved by zero-padding the IFFT. If the oversampling rate is $f_{os} = Lf_s$, where L is the oversampling factor, the IDFT matrix has dimension $(NL \times NL)$. Although not shown, following block 705, a cyclic prefix or guard interval is typically added to each OFDM symbol, followed by filtering, D/A conversion, frequency up-conversion, amplification, and possibly other radio front-end processing.

FIG. 7B is a flow diagram that depicts a method of processing received spread-OFDM signals in accordance with some aspects of the disclosure. By way of example, the method depicted in FIG. 7B can be performed by a server-side WWAN device or system to receive spread-OFDM uplink signals from at least one UE.

The WWAN assigns uplink OFDM subcarriers to UEs, such as via channel-dependent scheduling or some other scheduling scheme 710. Uplink OFDM subcarriers can be scheduled dynamically, such as in response to specified bandwidth needs. Different blocks of subcarriers can be configured prior to assignment or on the fly, and in a manner that subcarrier parameters (such as the number of subcarriers and their spacing) are configured to enable orthogonal spreading codes (or at least spreading codes with low cross correlations), complex spreading codes with low PAPR, and/or coding/decoding that can utilize fast algorithms (such as FFTs).

In some aspects, a WWAN device has subcarrier parameter information available from the scheduling 710. In other aspects, the WWAN device receives the subcarrier parameter information by some other means. In one aspect, the WWAN device reads the subcarrier parameter information transmitted in a control channel, which might include a broadcast channel containing scheduling information. In other aspects, the WWAN device reads and/or determines subcarrier parameter information from uplink UE transmissions. The subcarrier parameter information can then be used in subsequent steps or blocks, such as depicted in FIG. 7B.

Received spread-OFDM signals are demodulated 711. In some aspects, the subcarrier parameter information can be used to demultiplex received OFDMA signals, followed by demodulation 711 of the OFDM subcarriers corresponding to each UE. Although not shown, demodulation 711 can include RF front-end processing (such as amplification, filtering, down-conversion, ADC, etc.), cyclic prefix removal, equalization, and/or matched filtering. In some aspects, demodulation 711 can comprise spatial demultiplexing (such as MIMO subspace processing). Other types of demultiplexing may be performed. Demodulation 711 typically comprises performing an over-sampled FFT, although other types of demodulation may be employed. In some aspects, demodulated OFDM signals can be equalized, such as via frequency-domain equalization (not shown).

Estimated spread data symbols produced from demodulation 711 are de-mapped 712. In one aspect, demodulation 711 comprises performing an FFT on all the received signals, and de-mapping 712 can comprise demultiplexing (e.g., separating the estimated spread data symbols with respect to corresponding UE). The subcarrier parameter information can be used to group

the estimated spread data symbols according to their respective UEs. Demodulation 711 and/or de-mapping 712 can employ data re-ordering (e.g., symbol re-ordering and/or bit re-ordering) to facilitate de-spreading 713.

De-spreading 713 can comprise utilizing a fast algorithm, such as an FFT, to de-spread the estimated spread data symbols. Input parameters to the de-spreading algorithm can be selected based on the subcarrier parameter information, such as to provide a correct de-spreading code length and/or appropriate de-spreading code values for de-spreading the estimated spread data symbols. Outputs from the de-spreading 713 comprise de-spread data symbols, which can be processed to generate estimates of the original data symbols. These estimates may be grouped by UE.

In one aspect, a spread-OFDM transceiver comprises a non-transitory computer-readable memory storing DFT-spread OFDM software instructions thereon and at least one processor configured to execute the DFT-spread OFDM software instructions to operate as a spread-OFDM transmitter. Such a transceiver is depicted in FIG. 9.

In one aspect of the disclosure, FIG. 8A depicts a set of modules, each comprising instructions stored on a non-transitory computer-readable memory and configured to instruct a general-purpose processor (such as a processor core, a server, a distributed computing system, etc.) to perform functions disclosed herein. In other aspects, one or more modules can comprise a specific-purpose processor, such as an application-specific integrated circuit or some other circuit.

A baseband modulator, which can be implemented as a software module 801, transforms a binary input to a multilevel sequence of complex numbers in one of several possible modulation formats, including binary phase shift keying (BPSK), quaternary PSK (QPSK), 16-level quadrature amplitude modulation (16-QAM) and 64-QAM. The modulator 801 can adapt the modulation format, and thereby the transmission bit rate, to match current channel conditions of the transceiver. The output signal is referred to as original data symbols.

A spreader, which can be implemented as a software module 802 which provides spreading instructions to a processor, groups the original data symbols into blocks, each comprising N symbols. The spreader is configured to perform an N -point discrete Fourier transform (DFT) to produce a set of spread data symbols. In accordance with certain aspects of the disclosure, it is instructive to note that the DFT-spread output signal (i.e., the set of spread data symbols) differs from the customary frequency-domain representation of a spectral analysis that produces frequency responses according to tones (i.e., OFDM tones constitute the transform's basis functions). For example, the DFT-spreading output signal comprises N spread data symbols, whereas the spectral analysis produces only $N/2$ frequency responses, as the bandwidth of the baseband frequency response signal is limited to the range of positive frequencies, 0 to half the sampling rate ($= f_{\text{Nyquist}}$).

We begin with the definition of frequency, which Merriam-Webster Dictionary defines as the number of repetitions of a periodic process in a unit of time; the number of complete alternations per second of an alternating current; and the number of complete oscillations per second of energy (as sound or electromagnetic radiation) in the form of waves. The definition of frequency offers no distinction between a negative frequency and a positive frequency. Rather, what differentiates a negative frequency from a positive frequency relates to direction, not tone.

The mathematical representation of negative frequency can be found in the expression of physical signals as a sum of complex exponential components. For example, the negative frequency can be seen in the representation of cosine and sine functions as the weighted sums of the corresponding exponential function:

$$\cos(\omega t) = \text{Re}\{ e^{i\omega t} \} = (e^{i\omega t} + e^{-i\omega t})/2$$

$$\sin(\omega t) = \text{Im}\{ e^{i\omega t} \} = (e^{i\omega t} - e^{-i\omega t})/2i$$

In discrete systems, the frequency $f = \omega/2\pi$ of an analysis interval can range from 0 to f_{sam} , or equivalently, from $-f_{\text{sam}}/2$ to $+f_{\text{sam}}/2$, where f_{sam} is the sampling frequency (i.e., the number of samples per interval). In discrete-time systems, the frequency response is constrained by the Nyquist frequency, which is half the sampling rate f_{sam} .

In general, when a sinusoid of frequency f is sampled with frequency f_{sam} , the resulting number of cycles per sample is f/f_{sam} (known as normalized frequency), and the samples are indistinguishable from those of another sinusoid (called an alias) whose normalized frequency differs from f/f_{sam} by any integer (positive or negative). Replacing negative frequency sinusoids by their equivalent positive frequency representations, all the aliases of frequency f can be expressed as $f_{\text{alias}}(n) = |f - nf_{\text{sam}}|$ for any integer n , with $f_{\text{alias}}(0)$ being the true value.

Aliasing matters when analyzing a signal, such as performing spectrum analysis, which expresses the discrete signal of N complex data symbols as a set of $N/2$ frequency responses, sometimes referred to as tones. Tones are defined herein in the usual and customary sense with regard to the fields of OFDM and Fourier transforms as orthogonal frequencies, e.g., spectral components. The typical analysis technique employs the smallest of the $f_{\text{alias}}(n)$ frequencies. So it is important that $f_{\text{alias}}(0)$ be the unique minimum. A necessary and sufficient condition for this is $f_{\text{sam}}/2 > |f|$, where $f_{\text{sam}}/2$ is the Nyquist frequency of a system with sampling rate f_{sam} . For example, with Fourier transform analysis in a digital spectrum analyzer, it is necessary to sample the input signal with a sampling frequency that is at least twice the bandwidth of the input signal due to the Nyquist limit. The Fourier transform will then produce a spectrum containing frequencies from 0 to $f_{\text{sam}}/2$. While only $N/2$ frequency responses are achievable, N -point spreading disclosed herein can produce N spread data symbols.

The following software code can be used to implement DFT spreader 802 in accordance with aspects of the disclosure. By way of example, the FFTW program (such as can be found at www.fftw.org, all the descriptions and documentation described therein and the contents of the links provided, being incorporated by reference in their entireties) can be employed to compute a DFT, such as a one-dimensional DFT of size N :

```
#include <fftw3.h>
...
{
    fftw_complex *in, *out;
    fftw_plan p;
    ...
    in = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) * N);
    out = (fftw_complex*) fftw_malloc(sizeof(fftw_complex) * N);
```

```

        p = fftw_plan_dft_1d(N, in, out, FFTW_FORWARD,
FFTW_ESTIMATE);
        ...
        fftw_execute(p); /* repeat as needed */
        ...
        fftw_destroy_plan(p);
        fftw_free(in); fftw_free(out);
    }

```

To use the FFTW program, this code example is linked with the `fftw3` library. The example code first allocates the input and output arrays using the `fftw_malloc` function.

The data is an array of type `fftw_complex`, which is by default a `double[2]` composed of the real (`in[i][0]`) and imaginary (`in[i][1]`) parts of a complex number. The next step is to create a *plan*, which is an object that contains all the data that FFTW needs to compute the FFT. This function creates the plan:

```

fftw_plan fftw_plan_dft_1d(int N, fftw_complex *in,
fftw_complex *out, int sign, unsigned flags);

```

The first argument, N , is the size of the transform that will be computed. While the size N can be any positive integer, sizes that are products of small factors can be transformed most efficiently, such as described herein. The next two arguments are pointers to the input and output arrays of the transform. These pointers can be equal, indicating an *in-place* transform. The fourth argument, `sign`, can be either `FFTW_FORWARD` (-1) or `FFTW_BACKWARD` ($+1$) to indicate the direction of the transform. Technically, it is the sign of the exponent in the spreading codes. While aspects of the disclosure discuss forward transforms for spreading, other aspects can employ the backward (e.g., inverse) transform for spreading. For example, an IDFT can be implemented as an IFFT to provide for spreading or generating the spreading code(s). Thus, the term DFT as used herein is meant to include its corresponding backward (e.g., inverse) transform. The flags argument is usually either `FFTW_MEASURE` or `FFTW_ESTIMATE`. `FFTW_MEASURE` instructs FFTW to run and measure the execution time of several FFTs in order to find the best way to compute the transform of size N .

Once the plan has been created, it can be used multiple times for transforms on the specified input and output arrays by computing the transforms via

```
fftw_execute(plan);
void fftw_execute(const fftw_plan plan);
```

The DFT results are stored in-order in the output array (`out`), with the zero-frequency (DC) component in `out[0]`. If `in != out`, the transform is *out-of-place* and the input array (`in`) is not modified. Otherwise, the input array is overwritten with the transform. To transform a *different* array of the same size, a new plan is created with `fftw_plan_dft_1d`, and FFTW automatically reuses the information from the previous plan, if possible. The plan can be deallocated by calling `fftw_destroy_plan(plan)`.

FFTW uses the standard “in-order” output ordering, meaning that the n^{th} output corresponds to the frequency n/N (or n/T , where T is the total sampling period). In terms of positive and negative frequencies, this means that the positive frequencies are stored in the first half of the output and the negative frequencies are stored in backwards order in the second half of the output (i.e., the frequency $-n/N$ is the same as the frequency $(N-n)/N$).

The output ordering of the FFT depends on the type of FFT employed, including whether the FFT is implemented in hardware or software. For example, an FFT block can output the frequency indices in linear or bit-reversed order. Linear ordering of the frequency indices requires a bit-reversal operation. Thus, in some aspects, it may be necessary for the FFT or the mapper to re-order the output, such as to provide a mapping to the OFDM subcarriers which yields the low PAPR.

In some aspects of the disclosure, spreader 802 may be implemented via the following steps. A DFT can be used to generate the spreading codes, which are then stored in memory. Based on OFDM subcarrier assignment, subcarrier parameter(s) is (are) input, and a corresponding set of codes is selected from the memory and used to spread the original data symbols, such as via a matrix multiplication operation. For example, the input vector (`in`) can be a kernel used by the FFTW program to generate the spreading matrix, which can then be stored in non-transitory memory, and selected thereafter (such as with respect to the number of subcarriers N , subcarrier spacing, and/or any other subcarrier parameter(s)) for use in a matrix multiplication operation with a matrix comprising the original data symbols.

In aspects disclosed herein, the input vector comprises the data symbols, wherein the vector length N can be selected to have small prime factors (which can provide certain processing performance advantages). The input data vector can be configured, such as via zero insertion and scaling, to affect the distribution and/or scaling of non-zero terms in the output vector.

In one aspect, a spreading configuration module 811 processes subcarrier parameters corresponding to resource blocks (e.g., OFDM subcarriers) assigned to the transmitter. The subcarrier parameters can be determined from scheduling information received in a control channel, such as a downlink broadcast channel in a WWAN used to communicate resource block assignments to the UEs for use in uplink transmissions. The spreading configuration module 811 might receive scheduling information or subcarrier parameters from a UE's RAN control module (not shown) configured to process network control information.

While aspects disclosed herein provide examples of uniformly spaced OFDM subcarriers, alternative spreading algorithms (which may employ a DFT) can be used to produce complex spreading codes adapted to other subcarrier topologies to provide for an advantageous combination of orthogonality (i.e., cross correlation) and low PAPR. Some of these spreading codes can be poly-magnitude as well as polyphase. In some aspects, better cross correlation can be sacrificed for improved PAPR. Bandwidth efficiency might be sacrificed to achieve better PAPR and/or orthogonality. Thus, in some aspects, various performance metrics (which can include PAPR, orthogonality, bandwidth efficiency, as well as others) can be employed in an optimization scheme in which the values of such metrics are weighted, and optimization comprises evaluating a weighted sum (or some other function) of the performance metrics.

The spreading configuration module 811 can configure (including dynamically adapting) the spreader 802 to produce the spread data symbols in accordance with the subcarrier parameter(s) and at least one spreading criterion. Spreading criteria can include objectives, such as providing a PAPR below a predetermined threshold, providing orthogonality (which can comprise an evaluation, such as whether spreading code cross correlations are below a threshold value), and

enabling efficient spreading (such as via a fast transform algorithm, or other types of processing). Other spreading criteria may be employed.

By way of example, in IEEE 802.11a, the FFT size is typically 64 with a sample rate of 20 MHz. This yields a subcarrier spacing of 312.5 kHz. Of these 64 potential subcarriers, 12 of them are unused (sometimes referred to as "virtual carriers"). Of the remaining 52 subcarriers, 4 contain pilot tones, so only 48 subcarriers carry information at any given time. Instead of transmitting one original data symbol per 312.5 kHz subcarrier, the spreader 802 provides spread data symbols, each representing a linear combination of the original data symbols, which allows a portion of each original data symbol to be transmitted on all 48 or 52 subcarriers. While this IEEE 802.11a example is described, it should be appreciated that aspects of the disclosure described herein can be employed in other cases, which can include other systems.

In one aspect, the spreading configuration module 811 might configure the spreader 802 to employ a 52-point FFT to generate the spread data symbols corresponding to the reference signals plus user data signals. The resulting 52 spread data symbols are then mapped by the mapper 803 to the IFFT 804. Since 52 has prime factors of 2,2,13 and 48 has prime factors of 2,2,2,2,3, the spreading configuration module 811 could configure the spreader 802 to employ a 48-point FFT to spread the user data signals and a 4-point FFT to spread the reference signals, which might provide more efficient spreading than the 52-point FFT spreading. However, employing separate spreading of the reference signals and user data signals could result in a higher PAPR. Thus, the spreader 802 might employ an algorithm that weighs the efficiency and PAPR criteria to select which spreading mode to employ. It should be appreciated that the algorithm employed by the spreader 802 can employ various additional criteria. In some cases, the additional criteria can affect the weights of the spreading criteria (e.g., efficiency and PAPR). For example, operating criteria, such as (but not limited to) the UE's transmitted signal power, modulation scheme, modulation constellation size, pre-coding, MIMO operation, etc., can affect how the spreading configuration module 811 configures the spreader 802 to spread the original data symbols. In some aspects, operating conditions, such as determined from channel state information, network traffic, network topology information, received signal strength, routing tables, and the like, can affect how the spreading configuration module 811 configures the

spreader 802 to spread the original data symbols. In some aspects, the operating conditions may be measured to infer the UE's operating parameters (such as transmit power, modulation, pre-coding, etc.). In some aspects, higher PAPR might be tolerable when a small constellation size (e.g., BPSK modulation) and/or low transmit power is employed, so spreading can be configured to improve processing efficiency and/or orthogonality at the expense of allowing for a higher PAPR. When high transmission power and/or modulations that produce a high-PAPR signal are employed, there might be less PAPR budget for the spreader 802 to exploit. Thus, the spreading configuration module 811 might configure the spreader 802 to sacrifice processing efficiency and/or orthogonality in favor of lower PAPR.

In another aspect, with respect to the IEEE 802.11a example, the spreading configuration module 811 might configure the spreader 802 to employ a 64-point FFT to generate the 52 spread data symbols corresponding to the reference signals plus user data signals. For example, the spreader 802 might be configured to generate a pre-spread input of 64 pre-spread original data symbols to the 64-point FFT, wherein the pre-spreading causes the FFT output to comprise only 52 non-zero spread data symbols. The resulting 52 spread data symbols are then mapped by the mapper 803 to the IFFT 804. It should be appreciated that aspects of spreading configuration can be used in other scenarios and in other systems to employ N-point transforms for generating fewer than N non-zero outputs, the outputs comprising spread data symbols that satisfy one or more criteria, which can include low PAPR and/or orthogonality.

In some aspects of the disclosure, instead of a fixed algorithm for computing the DFT, the spreading configuration module 811 can adapt the DFT algorithm in the spreader 802 relative to details of the underlying hardware in order to maximize performance. For example, while FFTW's *planner* determines the fastest way to compute the transform for the machine on which it resides, other factors that depend on the subcarrier parameters can affect the processing efficiency. Thus, the spreading configuration module 811 can interface with the planner (or perform functions of the planner) to adapt the DFT algorithm relative to specific features of the calculations that will be performed. Various features, such as DFT size, sparseness of the spreading matrix, and/or characteristics of the input data, can be employed along with information about the underlying hardware to configure the DFT algorithm. The

planner produces a data structure called a *plan* that contains this information. Subsequently, the plan is *executed* to transform the array of input data as dictated by the plan.

In some aspects, pulse shaping can be performed by “windowing” the output of the spreader 802. This can be performed as part of the spreading, or it may be performed by the mapper 803, such as applied to inputs of the IFFT 804. For example, a tapered window can taper the amplitudes of at least some of the spread data symbols such that the taper is applied to the edges of the allocated spectrum. Raised cosine and Gaussian filter shapes are often used, but other types of pulse shaping can be employed.

The spreader 802 and/or the mapper 803 can configure the spread data symbols by arranging their order relative to the IFFT 804 input. Output values of the FFT are appropriately mapped to OFDM subcarriers in a manner that produces a low-PAPR spread-OFDM signal (regardless of the order or values of the original data symbols). In one aspect, ordering provides for mapping spread data symbols (relative to ascending spreading-code index) to ascending subcarrier frequencies, such as wherein the zero-frequency (DC) value corresponds to the lowest subcarrier frequency, in order to provide low-PAPR spread-OFDM signal.

The mapper 803 maps each of the N DFT outputs to one of the $M > N$ IFFT 804 bins. As in OFDMA, a typical value of M is 256 subcarriers and $N = M/Q$ is an integer submultiple of M . Q is the bandwidth expansion factor of the symbol sequence. The result of the subcarrier mapping is a set of complex subcarrier amplitudes, where N of the amplitudes are non-zero. As in OFDMA, the M -point IDFT 804 transforms the subcarrier amplitudes to a complex time domain signal, which is the spread-OFDM signal.

The transmitter can comprise a cyclic prefix appender 805, which inserts a cyclic prefix in order to provide a guard time to prevent inter-block interference (IBI) due to multipath propagation. In general, the cyclic prefix is a copy of the last part of the block, which is added at the start of each block. If the length of the cyclic prefix is longer than the maximum delay spread of the channel, or roughly, the length of the channel impulse response, then, there is no IBI. Since the cyclic prefix is a copy of the last part of the block, it converts a discrete time linear convolution into a

discrete time circular convolution. Thus, transmitted data propagating through the channel can be modeled as a circular convolution between the channel impulse response and the transmitted data block, which, in the frequency domain, is a pointwise multiplication of the DFT frequency samples. Then, to remove the channel distortion, the DFT of the received signal can simply be divided by the DFT of the channel impulse response point-wise, or a more sophisticated frequency domain equalization technique can be implemented.

Additional baseband processing 806 can be performed. For example, pulse shaping can reduce out-of-band signal energy. In electronics and telecommunications, pulse shaping is the process of changing the waveform of transmitted pulses. Its purpose is to make the transmitted signal better suited to its communication channel, typically by limiting the effective bandwidth of the transmission. In RF communication, pulse shaping is essential for making the signal fit in its frequency band. At baseband, the time sequence of the spread-DFT signal is filtered by the pulse-shaping filter. The spectrum of the transmission is thus determined by the filter.

Digital-to-analog conversion (DAC), frequency up-conversion, and amplification are typically performed to produce a transmitted signal. In practical implementations, typical DACs use digital interpolation filtering before implementing the D-to-A conversion. By interpolating the data samples, the performance of the reconstruction filter is improved, as increasing the sampling frequency can be seen to directly reduce the analog filter requirements for alias suppression.

Interpolation in OFDM is typically performed by the IFFT 804. Interpolators in OFDM are described in U.S. Pat. No. 6,597,745, which is incorporated by reference, wherein a transform-domain interpolation unit expands a length-N transform domain vector by inserting zeros in the length-N transform domain vector to produce a length-2N transform domain vector. This transform-domain up-sampling unit interpolates the transform domain vector.

Interpolators in spread-OFDM transmitters can be employed in various aspects of the disclosure. By way of example, interpolation is disclosed throughout U.S. Pat. No. 6,686,879 (such as illustrated in FIG. 19), which is incorporated by reference, wherein a data sequence is serial-to-parallel converted and then modulated onto multiple OFDM subcarriers, which are provided with

phase offsets to synthesize a desired pulse shape for the resulting data-modulated pulse waveform. This process of transforming a serial data stream into a sequence of data-modulated pulses is implemented using an invertible transform function, such as an IFFT. Interpolation can also be provided via pulse shaping.

Aspects of the disclosure can include any of various types of interpolation. In order to perform frequency-domain interpolation, the input data is up-sampled before IFFT processing. The up-sampling can be performed by zero-padding the middle samples of the input sequence. One disadvantage of frequency-domain interpolation is the increase in the IFFT size. For this reason, the oversampling rate is often kept relatively low.

As discussed above, in accordance with certain aspects of the disclosure, DFT-spreading 802 employs an N -point DFT to spread a sequence of data symbols $s(n)$ to produce N spread symbols, $x(n)$, which are to be modulated onto N OFDM subcarriers. To the contrary, in spectrum analysis, the transform of a discrete signal produces frequency responses corresponding to tones. The limitation of the transform's orthonormal basis to tones discards the negative-frequency components. Whether a pair of signals have negative and positive frequencies, or they have a relative phase offset (e.g., in-phase and quadrature phase), if they have the same frequency, then they are the same tone. The basic idea behind employing a DFT on a discrete signal to calculate frequency responses corresponding to tones is that the negative frequency components of the Fourier transform are superfluous due to Hermitian symmetry. These negative frequency components are discarded with no loss of information, leaving a complex-valued function. But in aspects of the disclosure, it is unnecessary to discard spread-DFT symbols produced by the DFT-spreading 802.

To generate a spread-OFDM up-sampled-by- M analytic time signal (assuming N is even) from the spread symbols, $x(n)$, a method, circuit, and/or processor, for example, according to one aspect of the disclosure can provide for performing the following steps.

1. Create an MN -point spectral sequence $x_{\text{int}}(m)$ initially set to all zeros. In some aspects, the product MN can be an integer power of two.

2. Assign $x_{\text{int}}(0) = x(0)$, and $x_{\text{int}}(N/2) = x(N/2)$.
3. Assign $x_{\text{int}}(m) = 2x(m)$, for $1 \leq m \leq (N/2)-1$. For example, when performed by a UE, this step and the previous one can provide for mapping non-zero symbol values to the OFDM subcarriers assigned to the UE.
4. Compute an $M \cdot N$ -point IFFT of $x_{\text{int}}(m)$ to yield the desired $M \cdot N$ -length analytic (complex) $x_{\text{c,int}}(n)$ sequence.
5. Optionally, multiply $x_{\text{c,int}}(n)$ by M to compensate for the $1/M$ scaling factor.

In the domain of digital signal processing, the term interpolation refers to the process of converting a sampled digital signal to that of a higher sampling rate (i.e., up-sampling) using various digital filtering techniques (e.g., convolution with a frequency-limited impulse signal). In such applications, there is a specific requirement that the harmonic content of the original signal be preserved without creating aliased harmonic content of the original signal above the original Nyquist limit of the signal (i.e., above $f_s/2$, which is half of the original signal sample rate, $1/T$). For example, Let $X(f)$ be the Fourier transform of a function, $x(t)$, whose samples at some sampling interval, T , equal the $x[n]$ sequence. The passband bandwidth of the corresponding interpolation filter is defined by its cut-off frequency, $.5/L$, where L is the oversampling factor. In terms of actual frequency, the cutoff is $\frac{1}{2} \cdot (1/T)$ Hz, which is the Nyquist frequency of the original $x[n]$ sequence.

Bandwidth is the difference between the upper and lower frequencies in a continuous set of frequencies. The passband bandwidth is the difference between the upper and lower cut-off frequencies of, for example, a band-pass filter, a communication channel, or a signal spectrum. In the case of a low-pass filter or baseband signal, the bandwidth is equal to its upper cut-off frequency, $f_s/2$.

FIG. 8B is a block diagram that depicts modules corresponding to processing functions that can be implemented by a computer processor programmed to perform methods in accordance with aspects of the disclosure. In accordance with an aspect of the disclosure, a server-side device or system receives spread-OFDM transmissions from one or more UEs in a WWAN. After processing by one or more RF front-ends (not shown), a server-side processor (or processors)

can receive the down-converted baseband signal(s). A baseband processor(s) 821 can process the received baseband signal, typically providing ADC processing, matched filtering (e.g., pulse shape filtering), amplification, and/or possibly other baseband processing operations to produce a spread-OFDM signal(s), which possibly has a cyclic prefix. A cyclic prefix remover 822 can optionally remove any cyclic prefix. The spread-OFDM signal(s) is processed by an M-point DFT (or some equivalent time-domain to frequency-domain converter) 823 to produce spread data symbols, which may be estimates of the spread original data symbols that were transmitted on each OFDM subcarrier. In some aspects, the DFT 823 may be configured to perform frequency-domain windowing, such as via control of a windowing module 833. A demultiplexer 824 may optionally be used to provide OFDMA demultiplexing if necessary. The spread data symbols are usually equalized by an equalizer 825 prior to despreading. However, equalization may not be necessary in certain aspects. In some aspects, the equalizer 825 may comprise a spatial demultiplexer. In some aspects, the spatial demultiplexer is configured to perform MIMO subspace demultiplexing, such as Cooperative-MIMO subspace demultiplexing.

A despreader 826 despreads the spread data symbols to produce estimates of the original (despread) data symbols. The despreader 826 can employ a fast transform algorithm, such as an IFFT, which can be implemented with the FFTW software. The despreader 826 is controlled by a despreading configuration module 836, which can receive one or more subcarrier parameters corresponding to the OFDM subcarriers assigned to a particular UE(s). Subcarrier parameters, which can include number of subcarriers, subcarrier spacing, and the like, provide an indication of spreading parameters (and thus, despreading parameters), which the despreader 826 can use to despread received spread data symbols. In some aspects, subcarrier parameters are understood to comprise spreading (and/or despreading) parameters associated with OFDM resource blocks. In some aspects, such spreading (and/or despreading) parameters may be pre-associated with each resource block assignment and communicated via the scheduler 835 to the despreading configuration module 836. In some aspects, the despreading configuration module 836 listens to a scheduling channel broadcast by an uplink scheduler 835 to determine the subcarrier parameters. In other aspects, the despreading configuration module 836 might determine the subcarrier parameters from the UE transmissions.

The despreader 826 can be configured to perform hard decisions, soft decisions, or mixed-decision processing to produce the estimated data symbols. A baseband demodulator 827 may optionally be provided to perform further baseband processing of the estimated data symbols.

As depicted in FIG. 9, a transceiver configured in accordance with aspects disclosed herein can include a controller, such as at least one computer or data processor 910, at least one non-transitory computer-readable memory medium embodied as a memory 920 that stores a program of computer instructions 921, and at least one suitable radio frequency (RF) transmitter/receiver 901 for bidirectional wireless communications with at least one other transceiver via one or more antennas 905. The exemplary aspects of the disclosure (including those depicted in the flow diagrams and block diagrams) may be implemented, at least in part, by computer software executable by the data processor 910. The transceiver shown in FIG. 9 can be a UE, a base transceiver station, a relay, or some other transceiver.

Aspects disclosed herein can include Cooperative-MIMO precoding, and can comprise configuring the spreading codes to provide for spreading across a combination of subcarriers and antennas (such as across multiple UEs). In such aspects, precoding can be configured to achieve a combination of cooperative spatial multiplexing across a plurality of UEs and a low PAPR for each UE's transmissions. In other aspects, precoding may comprise pre-equalizing the transmitted signal. In such aspects, for example, pre-equalization weights applied to transmitted OFDM subcarriers, such as may be implemented by incorporation into the spreading codes, can be derived from channel information. Various techniques, including multi-objective optimization and other multi-objective algorithms can be employed to generate spreading codes that optimize (or at least achieve a predetermined performance threshold relative to) certain objectives, such as low PAPR, low cross correlations, and/or other objectives.

A transceiver configured in accordance with aspects of the disclosure is depicted in the block diagrams of FIGs. 10A and 10B. The transceiver can comprise a client-side device or system, a server-side device or system, a relay device or system, and/or other WWAN transceivers. In some aspects, the blocks can comprise hardware components, such as circuits. The blocks can comprise processors, such as general-purpose processors programmed to perform functions in

accordance with methods disclosed herein. The blocks are also indicative of functions that can be performed by a transceiver (which includes a network of transceivers) in accordance with aspect disclosed herein. In some aspects, the blocks can comprise separate devices communicatively coupled together via at least one network. In some aspects, at least some of the separate devices can be coupled together via a WLAN, which can include a radio and/or optical network.

In FIG. 10A, the transceiver comprises a WWAN precoder 1010, which is configured to calculate precoder weights for use in a distributed antenna system 1020. The precoder 1010 receives information from a WWAN scheduler, such as a WWAN schedule processor 1001 and a WWAN CSI processor 1002. A data source 1003 provides original data symbols to the WWAN precoder 1010. The precoder 1010 is communicatively coupled to a fronthaul router 1012, which is connected to the distributed antenna system 1020.

In FIG. 10B, the transceiver comprises a WWAN decoder 1030, which is configured to calculate decoder weights for processing received signals, such as signals received from the distributed antenna system 1020. The decoder 1010 receives information from the WWAN schedule processor 1001 and the WWAN CSI processor 1002. A data sink 1033 processes decoded data symbols from the WWAN decoder 1030. The decoder 1010 is communicatively coupled to the fronthaul router 1012, which is connected to the distributed antenna system 1020. In some aspects, the WWAN precoder 1010 and the WWAN decoder 1030 can be a single component or system.

In some aspects, blocks disclosed herein comprise processing elements that provide necessary computing facilities for the device or system. By way of example only, processing elements can include special purpose hardware, such as FFT, coding and/or decoding processors, or programmable CPUs. In aspects wherein one or more of the blocks are communicatively coupled together via a network, such as may be implemented in a distributed system, the blocks can comprise interfaces which contain appropriate traffic format conversion circuitry between the blocks and the interconnect network input and output. In some aspects, the system further includes internal resources with shared usage among various system blocks. By way of example only, these internal resources may comprise memory and a memory access controller.

In some aspects, the router 1012 includes Input-Output (I/O) device interface units that provide connection between the precoder 1010 and external devices of the distributed antenna system 1020 through one or more fronthaul interfaces. By way of example only, these devices may include Ethernet, wireless standard compliant networking, fiber networking, and/or an expansion interface for creating larger systems using multiple systems of the type shown in figure.

In one aspect, the transceiver is a server-side device or system, and the WWAN schedule processor 1001 is a scheduler, which assigns resource blocks (e.g., blocks of OFDM subcarriers) for uplink and downlink communications with one or more client-side devices (e.g., UEs). The WWAN precoder 1010 can use the scheduling information to determine a set of OFDM subcarriers for which precoding weights will be generated. The precoder 1010 can also use the scheduling information to help determine which antennas in the distributed antenna system 1020 to allocate for possible use in serving the client devices. For example, the scheduling information might contain geographical information about each corresponding client device. This can assist in allocating distributed computing resources operated by the WWAN precoder 1010, for example, when multiple processing cores are employed. The WWAN precoder 1010 couples precoded-data signals or precoding weights and the original data signals to selected antennas of the distributed antenna system 1020 via the fronthaul router 1012.

In another aspect, the transceiver is a client-side device or system, and the WWAN schedule processor 1001 receives WWAN scheduling information, such as is typically broadcast in the WWAN. However, the schedule processor can receive the WWAN scheduling information by other means. In one aspect, cooperating client devices may convey their corresponding scheduling information to the WWAN schedule processor 1001, such as via the fronthaul network. The WWAN precoder 1010 can use the scheduling information to determine a set of OFDM subcarriers for which precoding weights will be generated. In some aspects, the WWAN precoder 1010 comprises a distributed computing system, such as may comprise multiple processing cores residing on different client-side devices. In some aspects, at least some of the processing cores of the WWAN Precoder 1010 might reside in a non-client device, such as a relay or a server-side device. The WWAN Precoder 1010 might be configured to use the

scheduling information to allocate distributed computing resources (e.g., processing cores, memory, fronthaul resources, etc.), such as for precoding and/or other processing operations. The WWAN precoder 1010 can couple precoded-data signals or precoding weights and the original data signals to selected antennas of the distributed antenna system 1020 via the fronthaul router 1012.

In one aspect, the transceiver is a server-side device or system, and the WWAN CSI processor 1002 provides downlink CSI to the WWAN precoder 1010. For example, in a reciprocal channel, the CSI processor 1002 can infer downlink CSI from uplink CSI measurements. In some aspects, the client-side devices can measure CSI in the downlink and feedback their measurements to the server-side. The WWAN precoder 1010 then provides those CSI measurements to the WWAN precoder 1010. The WWAN precoder 1010 can use the CSI to select antennas in the distributed antenna system 1020 to serve each client device and then use the CSI to calculate the precoding weights. By way of example, the WWAN precoder 1010 might select a preliminary, or candidate, plurality of antennas to be used for precoding, and then refine the selection of antennas based on various criteria. One objective of the WWAN precoder 1010 might include determining a set of the antennas that enables low-PAPR pre-coded transmissions per antenna. The WWAN precoder 1010 is operable to configure the precoding in order to provide low-PAPR transmissions. The WWAN precoder 1010 may be configured to achieve additional criteria, including enabling use of a fast transform, providing for code orthogonality (e.g., code spaces with low cross correlations), limiting WLAN overhead, etc.

In accordance with some aspects of the disclosure, it should be appreciated that blocks depicted in the figures can comprise interconnects that are not shown. By way of example, the WWAN CSI processor 1002 can be communicatively coupled to at least the WWAN schedule processor 1001 (such as in FIGs. 10A and 10B). In some aspects, the WWAN schedule processor 1001 employs CSI and/or other channel information for scheduling, such as to provide for channel-dependent scheduling. Channel-dependent scheduling can comprise selecting OFDM resource blocks with estimated and/or measured channel conditions that are advantageous for specific client devices. In some aspects, channel-dependent scheduling can comprise scheduling resource blocks to client devices in a manner that is advantageous to the operation of the server-side

system. For example, scheduling may provide for assigning the same or overlapping resources (e.g., resource blocks and/or other network resources, such as antennas, processors, fronthaul capacity, backhaul capacity, etc.) to a set of client devices, which may be clustered together or geographically separated, such as to enhance network efficiency and/or performance.

While CI coding eliminates the effect of data randomization on the PAPR of OFDM transmissions from a single user, channel-based precoding (such as MIMO precoding, pre-equalization, etc.) can introduce randomization into the transmittal signals' crest factors due to the natural randomness of the multipath channel, which translates into randomness in the precoding. Thus, some aspects of the disclosure are configured to exploit additional degrees of freedom available in a MIMO channel when the number of available transmit antennas exceeds the minimum required rank of the channel matrix to reduce the crest factors. For example, in one aspect, a set of active transmit antennas in the distributed antenna system can be selected from a larger set of candidate antennas in the distributed antenna system. In another aspect, the set of active transmitting antennas can comprise a larger number than the number of antennas receiving the precoded transmissions, the precoder 1010 exploiting the extra antennas to provide for reducing PAPR, reducing spatial cross correlation, improving diversity, and/or the like. This enables antenna selection to advantageously provide a set of antennas per OFDM tone that achieves low-PAPR transmissions per antenna and/or per device. A low-PAPR criterion might include an aggregate of PAPR across antennas and/or devices, PAPR corresponding to a subset of antennas and/or devices, an average PAPR, a mean PAPR, a peak PAPR, some other function of PAPR, or some function of PAPR weighted relative to some other criterion. In some aspects, the selection of antennas per tone can be performed for each set of original data symbols.

In one aspect, the transceiver is a client-side device or system, and the WWAN CSI processor 1002 provides uplink CSI to the WWAN precoder 1010. For example, in a reciprocal channel, the CSI processor 1002 can infer uplink CSI from downlink CSI measurements. In some aspects, the server-side devices might measure CSI in the uplink and feedback their measurements to the clients. The WWAN precoder 1010 provides the uplink CSI to the WWAN precoder 1010. The WWAN precoder 1010 can use the CSI to select antennas in the distributed antenna system 1020, which can include other client devices configured to operate in a Cooperative MIMO

network, and then use the CSI to calculate the precoding weights. By way of example, the WWAN precoder 1010 might select a preliminary, or candidate, plurality of antennas to be used for precoding, and then refine the selection of antennas based on various criteria. One objective of the WWAN precoder 1010 might include determining a set of the clients that enables low-PAPR pre-coded transmissions per client.

The data source 1003 provides a stream of original data symbols (which can comprise user data and/or reference signals) to the WWAN precoder 1010. In one aspect, the WWAN precoder 1010 calculates precoding weights separately for the user data and the reference signals. In other aspects, the WWAN precoder 1010 provides precoding weights for a data set comprising both user data and reference signals. In one aspect, the WWAN precoder 1010 is configured to select a block of the original data symbols from the data source 1003 and generate the precoding weights specific to the selected block of data. In other aspects, the WWAN precoder 1010 can calculate the precoding weights without a data input and then precode blocks of data from the data source 1003. In some aspects, the data source 1003 might reside in a client device and receive data from at least one other client device in a cluster of devices communicatively coupled together via the fronthaul network. Data from at least one other device can be input to the WWAN precoder 1010, which performs at least one of determining the precoding weights and precoding the data.

In a server-side device or system, the fronthaul router 1012 can comprise a local network manager, such as a Coordinated Multipoint router, communicatively coupled to the distributed antenna system 1020 (e.g., base transceiver stations, relays, remote radio heads, etc.) via any combination of fiber optic and wireless links. In a client-side device, the fronthaul router 1012 can comprise a local network manager, such as a cluster master, communicatively coupled to the distributed antenna system 1020 (e.g., the other clients in the cluster, relays, etc.) via wireless links.

In some aspects, the system shown in the figures can comprise a distributed system wherein the blocks are communicatively coupled via a fronthaul interconnect and may also include an interconnect network scheduler (not shown) which can configure and service communication

traffic between I/O devices, processing elements, and shared resources. The interconnect network scheduler can control and configure accesses through the fronthaul interconnect, optimize the overall system for metrics, such as performance and access latency using trade-off parameters (such as power consumption, overall system efficiency, and a fronthaul schedule program). In some aspects, the interconnect network scheduler can be implemented as a distributed mechanism, which may be inherently part of internal elements of the blocks, and may include routing units, integrated hardware with processing elements, shared resources, I/O devices, and/or software program(s) executed by processing elements.

In accordance with aspects disclosed with reference to FIG. 3, different network topologies (such as can be employed for connecting blocks, the distributed antenna system, and/or other resources within the blocks in FIGs. 10A and 10B) can be representative of data traffic created or used during precoding and/or decoding and can further comprise subnetwork topologies corresponding to partitioned processes (e.g., via data partitioning and/or computation partitioning). FIG. 3 depicts a reconfigurable interconnect network topology and scheduler wherein the scheduler provides control, configuration, and optionally status collection capabilities to and from the network nodes. There can be one or several subnetworks, each consisting of point-to-point interconnects and/or broadcasts. Each communication link can be established via routing elements, which can direct traffic streams to and/or from various processing units, memories, other shared resources, and/or distributed antennas. The quantity, topology and parameters of the links and routing elements can be determined at design time and/or dynamically configured.

Network topologies can be classified based on application operation mode and global characteristics, such as bandwidth, latency, and burst behavior. By way of example, different network topologies can be employed to process data corresponding to different OFDM subcarriers, different client devices being served, and/or different antennas in the distributed antenna system. In some aspects, computational partitioning can be performed. Different network topologies can correspond to different component problems. By way of example, a first network topology can be configured for processing CSI. A set of network topologies can be configured for determining precoding weights for each of a plurality of OFDM subcarriers. At

least another network topology can be configured for configuring the precoding weights to provide a low-PAPR precoded transmission for one or more antennas and/or devices.

A fronthaul interconnect network schedule program can determine configuration of various nodes that meet concurrent communication traffic requirements of one or several application modes. Alternatively, each application operation mode may have its own schedule program. Configuration and operation of interconnect nodes can be statically determined or dynamically adapted based on the schedule program. The schedule program can organize input and output data for each node into distinct categories based on characteristics of interest, such as bandwidth, latency, ordering for more efficient resource utilization, quality of service, etc.

Mechanisms to employ multiple traffic schedules, including loading and storage of the new schedule programs can be provided. A router in the fronthaul interconnect may provide internal storage, selection, and forwarding of multiple traffic streams from multiple inbound links to multiple outbound links. A router may accommodate multiple traffic types based on a predetermined fabric schedule program.

In some aspects, multiple blocks or components may share a fronthaul interface. As determined by a fronthaul scheduler, a particular link may be used to carry traffic for multiple communicating units at a variety of transfer granularity sizes, service schedules, and/or durations. Multiple links may be selected to operate in tandem to provide required services for incoming or outgoing traffic.

For some topologies, it may be desirable to subdivide a stream into several streams across different links. This enhancement may facilitate potentially more efficient system operation, and each subdivision might be accommodated by a different schedule program. Alternatively, it may be beneficial to aggregate several data streams (possibly corresponding to different topologies) into one stream over a shared link.

FIG. 11 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure. CSI for a MIMO-OFDM channel is collected 1101 and is used for calculating multiple precoding matrices 1102 for each tone, each precoding

matrix corresponding to a different antenna set. A set of precoding matrices, one for each tone, is selected 1103 according to a predetermined criterion based on PAPR. The selected set of precoding matrices is used to precode a block of the original data symbols 1104. In some aspects, this process may be performed for each of a plurality of original data blocks. Step 1105 provides for returning to step 1101 or step 1102. For example, in one aspect, steps 1103-1104 are repeated for a next block of original data symbols. In some aspects, steps 1101-1104 are repeated for the next block of original data symbols.

As disclosed above, the CSI may comprise measured channel conditions and/or statistical channel conditions. CSI may be inferred from channel measurements. For example, uplink CSI may be inferred from measured downlink CSI (and vice versa). Similarly, CSI corresponding to a particular tone may be interpolated from CSI corresponding to another tone. CSI may be directly measured from training signals (e.g., pilots) received by antennas in the distributed antenna system. In some aspects, CSI may be provided via data directed channel estimation. In some aspects, CSI is measured by devices communicatively coupled to the distributed antenna system via the WWAN and then fed back to the precoder(s) configured to perform the methods disclosed herein. By way of example, in an OFDM system, CSI can comprise flat-fading channel measurements and/or estimates (including statistics) corresponding to at least a subset of the antennas and for each tone.

Based on the CSI, a set of the antennas can be selected for each antenna on a device being served by the distributed antenna system via the WWAN. In some aspects, the device's antenna may be served by a first set of the antennas corresponding to a first tone and a second (different) set of antennas corresponding to a second tone. Some aspects disclosed herein provide for the distributed antenna system comprising a larger number of antennas than the aggregate number of antennas being served. This allows a subset of the antennas of the distributed antenna system to at least equal the aggregate number of antennas being served.

In one aspect, the distributed antenna system comprises a cluster of client devices, and the device(s) being served can comprise any of various antenna systems, including a server-side distributed antenna system, a server-side antenna array, one or more relay antennas, and/or one

or more client-device antennas (e.g., a cluster of client devices, a client device antenna array, or some combination thereof). In some aspects, a cluster of devices may cooperate, such as in mesh networks, ad-hoc networks, multi-hop networks, cellular networks, and in other types of networks. In another aspect, the distributed antenna system can comprise a plurality of server-side antennas, including antennas residing on multiple base transceiver stations, and possibly antennas residing on other server-side devices and/or systems, including relays, remote radio heads, and the like. The device(s) being served can include any of the aforementioned client-side, server-side, and/or any intermediary devices.

In step 1102, multiple combinations of serving antennas can be provided for each device (and/or antenna) being served, and there can be multiple combinations of serving antennas per tone per device (and/or antenna) being served. The serving distributed antenna system can comprise a larger number of candidate antennas than the aggregate number of antennas being served, which allows each selected subset of the antennas of the distributed antenna system to at least equal the aggregate number of antennas being served. In some aspects, the number of active antennas in the distributed antenna system serving a cluster of served antennas is larger than the number of antennas in the cluster being served. This results in extra degrees of freedom which are ordinarily used for array processing purposes, such as to provide added antenna-array gain, diversity, redundancy, and the like. Aspects of the disclosure can exploit these extra degrees of freedom to reduce PAPR of the transmissions from each antenna and/or device. For example, the extra degrees of freedom can provide for adaptations to the precoding matrix which can achieve objectives, such as low PAPR, that are not directly related to array processing performance.

In some aspects, additional degrees of freedom can be achieved by employing extra spectrum, which may include extra tones, for transmission. By way of example, the IDFT can be configured to employ extra tones in order to reduce the PAPR of the transmitted OFDM signal. In one aspect, the extra tones might be transmitted in a manner that avoids interfering with the WWAN system. For example, the extra tones may comprise unscheduled resources in the WWAN. In another case, the extra tones may comprise WWAN control channels which are not transmitted during the uplink timeslot. In some aspects, the extra tones can correspond to a different communication system other than the WWAN. In these aspects, the extra tones can be

weighted such as to reduce PAPR of the transmitted signals. In another aspect, the extra tones might comprise pilot tones, and data corresponding to weights applied to the pilot tones such as to reduce the PAPR may be communicated to the receive side such that the receive side can compensate for the weights in the received pilots. In such aspects, some data bandwidth is sacrificed to improve PAPR performance.

In some aspects disclosed herein, additional spectral bandwidth can be used to help reduce PAPR. However, the additional spectral bandwidth does not need to comprise tones. In some aspects, signals employed for reducing the PAPR can be pseudo-orthogonal or non-orthogonal relative to the spread-OFDM signal.

In one aspect of the disclosure, step 1102 comprises generating multiple precoding matrices for at least one tone such that each precoding matrix achieves a predetermined minimum cross correlation between subspace channels. By way of example, the degree of cross correlation can be determined based on spatial subchannel eigenvalues.

In step 1103, a precoding matrix set can comprise one precoding matrix per tone. For each set, the PAPR for each antenna and/or device can be determined for the precoded transmission across the full set of tones. At least one PAPR criterion based on these PAPRs can be determined, and the precoding matrix set qualifying as “low PAPR” based on the at least one PAPR criterion can be selected.

It should be appreciated that in some aspects, step 1102 depends on the CSI but not on the data block being precoded, so it may be updated based on the channel conditions changing (such as may be determined by coherence time or some similar channel characterization). Step 1103 might depend on the data block being precoded, and may be repeated for each block of original data symbols to be precoded. In some aspects, step 1102 may be repeated for each block. For example, given a new block of original data symbols, a new set of precoding matrices may be selected. This can include adapting previous precoding matrices.

In some aspects, steps 1102 and 1103 can be combined in an iterative process wherein the precoding matrices are adapted and the PAPR criterion for the adapted set is evaluated, and the process is repeated until a predetermined criterion is satisfied, such as a maximum number of iterations, an elapsed amount of time, a predetermined PAPR threshold, or the like. In some aspects, step 1103 comprises selecting a precoding matrix set from multiple sets which correspond to a best PAPR. In some aspects, step 1102 can comprise adapting the matrices according to one or more adaptation schemes. By way of example, an adaptation scheme may comprise randomly adapting at least one precoding weight, adapting precoding weights in response to how a previous adaptation changed a metric (such as PAPR, cross correlation, etc.), and/or adapting at least one precoding weight according to a measured characteristic of the channel and/or original data symbols. In some aspects, certain configurations of CSI values and/or data can be used to determine how to adapt the precoding matrices. Such adaptations may be determined, based on a given configuration(s), to have a high probability of yielding a lower PAPR. Such determinations may be based on historical data, perhaps being associated with correlated behaviors and/or identified trends, and/or they may be determined analytically.

In some aspects, favorable cross correlation can be sacrificed for favorable PAPR, or vice versa. In some aspects, it should be appreciated that the low PAPR criteria may be weighted with respect to particular antennas and/or devices that are transmitting the precoded signals. For example, in one aspect, low PAPR can be more important for battery-powered transceivers. Thus, a precoding matrix set may be selected that allows for higher PAPR among devices that receive line power to enable lower PAPR among devices that are battery powered. In some aspects, the transmit power of each device may determine how important it is to be provided with a low-PAPR coded signal. For example, devices that are currently transmitting with low transmit power might tolerate a high-PAPR transmission better than devices transmitting at high power. In some aspects, the inherent PAPR of the modulation constellation being used by each device may determine the low-PAPR criterion. In some aspects, power consumption per device may be employed to determine the PAPR criterion. For example, it may be important to provide for uniform power consumption across the transmitting devices. In some aspects, the type of device for each transmitting device may be used to determine its weight in the low-PAPR criterion. In some aspects, an operating status of a device may be used to determine its weight.

For example, it may be more important for devices with low battery power to be provided with low-PAPR coded signals. It should be appreciated that other operating parameters and device characteristics may be employed to determine the low-PAPR criterion.

FIG. 12 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure. CSI for a MIMO-OFDM channel is collected 1201 and can be used for selecting a set of antennas for each tone 1202. Precoding weights are calculated for each antenna-tone set (i.e., a set of antennas for each tone) 1203. PAPR is calculated 1204 for each active antenna and/or device in the distributed antenna system. Spatial cross correlations of the weighted transmissions may optionally be calculated 1205. A decision is based on the PAPR (and optionally the cross correlations) 1206, and the decision determines where control is transferred to in the flow diagram.

In one aspect, if the decision 1206 indicates that a PAPR criteria is not met with the current antenna-tone set, the method returns to step 1202 (indicated by decision result 1207.1) in order to select a new antenna-tone set. In some aspects, step 1207.1 can comprise sending information (such as decision information, precoding weights, cross correlation information, and/or instructions for selecting the new antenna-tone set) to step 1202.

In another aspect, the decision 1206 can cause control to return to step 1201 via step 1207.2. For instance, decision 1206 can comprise a determination of whether the CSI needs to be updated. In some aspects, the CSI is collected 1201 based on a predetermined time interval, when measured reference signals indicate a sufficient change in the channel state, for each block of original data symbols, or via some other criteria or mechanism.

In another aspect, the decision 1206 can cause control to transfer to block 1207.3 wherein a set of precoding weights is selected to precode the original data symbols. For example, when a predetermined PAPR criterion is met, the original data symbols are precoded 1207.3 using the weights that satisfy the criterion. The weights may be selected from weights of a corresponding antenna-tone set that best satisfies the PAPR criterion after a predetermined number of iterations, or the weights may satisfy the PAPR criterion, at which point the iterations cease and control is

transferred to block 1207.3. In some aspects, additional criteria may be employed in the decision 1206 as described above, and when those criteria are satisfied, the original data symbols are precoded 1207.3.

In one aspect, step 1202 comprises selecting a destination group of antennas. For example, a server-side system can select which client devices it will serve for a given set of distributed antennas. Optionally, this can be done for each OFDM tone or set of tones. In some aspects, the selected client devices comprise a cluster (which may be in close geographical proximity with each other), such as may be advantageous when the client devices are configured to perform client-side Cooperative MIMO. In other aspects, the selected clients may be geographically distributed, such as to ensure that reused frequency channels are uncorrelated. In some aspects, a similar decision on destination antennas is made by a cluster of client devices, such as a local group of UE's communicatively coupled together and configured to perform client-side Cooperative MIMO. The system (or cluster) can then select which antennas in its distributed antenna system to serve each destination antenna (or device), and this selection can be made for each tone or set of tones. For at least one tone, the selection can comprise a number of candidate distributed antennas that is greater than the channel-matrix rank necessary to provide a sufficient number of spatial subchannels to serve the destination antennas. For example, the number of transmitting antennas can be greater than the number of receiving antennas.

As described in the patents and applications incorporated by reference, the selection of spectral components (e.g., OFDM tones) and their association with particular wireless terminals can be performed to optimize WWAN system performance relative to the current WWAN channel. For example, the spectral components can be selected to minimize the effects of deep fades and/or interference. Spectral-component selection (e.g., scheduling) may be selected and/or adapted to optimize one or more WWAN link-performance metrics, including, but not limited to, SNR, BER, PER, and throughput. Spectral-component selection may be performed to achieve other objectives, such as to distribute processing loads across devices.

In accordance with certain aspects of the disclosure, scheduling can comprise one of two types of subcarrier mapping. Localized mapping comprises a contiguous block of subcarriers (e.g., a

continuous frequency band), whereas distributed mapping comprises a non-contiguous (e.g., discontinuous, or frequency-interleaved) set of subcarriers. With localized subcarrier mapping, it is possible to exploit frequency selective gain via channel-dependent scheduling (e.g., assigning uplink frequencies to each UE based on favorable channel conditions).

A set of precoding matrices, one for each tone, can be calculated 1203 according to a predetermined criterion based on PAPR. In accordance with some aspects of the disclosure, a precoder configures the precoding matrix to provide a spread-OFDM transmission(s) with low PAPR. By way of example, low PAPR can be achieved by selecting appropriate spreading codes (such as may be based on number of OFDM tones and tone spacing) and properly configuring the order in which spread data symbols are mapped to particular tones. The spreading codes can be generating using a DFT that is configured with appropriate input parameters. Thus, the precoder can provide for frequency-domain synthesis to generate a spread-OFDM signal that comprises a set of contiguous and/or non-contiguous OFDM tones. In aspects wherein the precoder is configured to perform MIMO subspace precoding in addition to spread-OFDM coding, the precoder can be configured to produce low-PAPR transmissions, such as by employing the methods corresponding to FIGs. 11-13. In some aspects, the precoder can adapt the transmit power of certain spatial subchannels in order to effect changes in the aggregate PAPR. By way of example, the precoder can scale the weights of a particular eigenvector to adjust power in the corresponding spatial direction.

The selected set of precoding matrices is used to precode a block of the original data symbols, and then the PAPR of each precoded transmission (such as transmitted by each transmitting antenna or device) can be calculated 1204, such as by aggregating precoded signals across all the tones allocated to the antenna or device. In some aspects, the PAPR (and thus the precoding) may be specific to each block of original data symbols, so this process may be performed for each original data block.

As precoding is adapted to reduce the PAPR of the spread-OFDM signal(s), there can be a tradeoff between desirable PAPR and spatial correlation attributes. Estimating the spatial correlation 1205 can be performed, which in one sense can be regarded as a measure of code

cross-correlation, which can be used to characterize orthogonality of the codes. Although many different techniques can be employed for determining the spatial correlation 1205, it should be appreciated that spatial correlation depends on the eigenvalue distributions of the correlation matrices. Each eigenvector represents a spatial direction of the channel, and its corresponding eigenvalue describes the average channel/signal gain in this direction. For example, for the transmit-side spatial correlation matrix, it describes the average gain in a spatial transmit direction. In some aspects, both transmit-side and receive-side spatial correlation matrices are determined. In some aspects, step 1205 can comprise determining some value derived from or otherwise based on spatial correlation. For example, channel capacity, which depends on spatial correlation, might be determined instead.

FIG. 13 is a flow diagram that depicts a precoding method in a distributed antenna system in accordance with some aspects of the disclosure. CSI is collected 1301, and then for each OFDM tone, a set of antennas in an origin distributed antenna system is selected to serve a set of destination antennas 1302. Precoding weights are calculated for each origin set 1303. PAPR is calculated for each antenna (and/or device) in the origin set 1304. After one or more iterations, one of the origin sets is selected 1305 to be used for precoding.

In one aspect of the disclosure, a set of UEs comprises the distributed antenna system, and the method depicted in FIG. 13 provides for precoding uplink transmissions from the UEs to a set of eNodeBs. For each of a plurality N_{tones} of OFDM tones, step 1302 provides for selecting a number $N_{\text{sets}}(n_{\text{tones}})$ of different UE sets to transmit pre-coded signals, where a particular number $N_{\text{sets}}(n_{\text{tones}})$ denotes a number of UE sets corresponding to an $n_{\text{tones}}^{\text{th}}$ OFDM tone. For each of the N_{tones} tones, step 1303 calculates precoding weights for all the corresponding UE sets. If there are N_{sets} UE sets for each of the N_{tones} OFDM tones, then there might be up to a total of $N_{\text{sets}} \cdot N_{\text{tones}}$ precoding matrices. A combination of precoding matrices is provided by selecting one precoding matrix for each of the N_{tones} OFDM tones. Step 1304 provides for calculating the PAPR for each of multiple combinations of the precoding matrices. By way of example, a PAPR can be calculated from an IDFT of a set of spread original data symbols comprising the original data symbols spread by a corresponding precoding matrix.

Step 1305 can comprise any of various techniques for selecting an antenna-tone set. For example, if the corresponding combination of precoding matrices satisfies a threshold criterion, such as can be based on PAPR, then the antenna-tone set is selected and the combination of precoding matrices is used to encode the original data symbols. In other aspects, a “best” metric (such as may be based on PAPR) may be determined, such as from an exhaustive search or a combinatorial search. A combinatorial search is one that might exploit one or more pruning strategies to avoid testing all possible candidate combinations. Combinatorial searches can include branch and bound, greedy, local search methods, and a variety of heuristics that use partial knowledge about the structure of the solution space, which can achieve a “good” solution, if not the “best” solution.

The various blocks shown in the figures may be viewed as method steps, and/or as operations that result from operation of computer program code, and/or as a plurality of coupled logic circuit elements constructed to carry out the associated function(s).

In general, the various exemplary aspects may be implemented in hardware or special purpose circuits, software, logic or any combination thereof. For example, some aspects may be implemented in hardware, while other aspects may be implemented in firmware or software which may be executed by a controller, microprocessor or other computing device, although the invention is not limited thereto. While various aspects of the exemplary embodiments of this disclosure may be illustrated and described as block diagrams, flow charts, or using some other pictorial representation, it is well understood that these blocks, apparatus, systems, techniques or methods described herein may be implemented in, as non-limiting examples, hardware, software, firmware, special purpose circuits or logic, general purpose hardware or controller or other computing devices, or some combination thereof.

It should thus be appreciated that at least some aspects of the exemplary aspects of the disclosure may be practiced in various components such as integrated circuit chips and modules, and that the exemplary aspects of this disclosure may be realized in an apparatus that is embodied as an integrated circuit. The integrated circuit, or circuits, may comprise circuitry (as well as possibly firmware) for embodying at least one or more of a data processor or data processors, a digital

signal processor or processors, baseband circuitry and radio frequency circuitry that are configurable so as to operate in accordance with the exemplary aspects of this disclosure.

Various modifications and adaptations to the foregoing exemplary aspects of this disclosure may become apparent to those skilled in the relevant arts in view of the foregoing description, when read in conjunction with the accompanying drawings. However, any and all modifications will still fall within the scope of the non-limiting and exemplary aspects of this disclosure.

CLAIMS

1. A transmitter configured to reside in a User Equipment (UE), comprising
 - a discrete Fourier transform (DFT) spreader configured to spread a block of original data symbols with a DFT-based spreading matrix to produce a plurality of spread data symbols;
 - a subcarrier mapper responsive to channel-dependent scheduling that assigns a set of uplink orthogonal frequency division multiplex (OFDM) subcarriers to the UE based on favorable channel conditions between the UE and at least one wireless wide area network (WWAN) access terminal, the subcarrier mapper configured to map each non-zero spread data symbol to one of the set of uplink OFDM subcarriers; and
 - an inverse-DFT configured to modulate the plurality of spread data symbols onto the set of uplink OFDM subcarriers to generate a spread-OFDM signal for transmission into the WWAN;wherein at least one of the DFT spreader and the subcarrier mapper configures the spread data symbols to provide the spread-OFDM signal with a low PAPR.
2. The transmitter recited in Claim 1, wherein the low PAPR equals a PAPR corresponding to a single-carrier signal.
3. The transmitter recited in Claim 1, wherein the uplink OFDM subcarriers comprise at least one of contiguous subcarriers and non-contiguous subcarriers.
4. The transmitter recited in Claim 1, wherein the DFT spreader is configured to perform a fast transform algorithm.
5. The transmitter recited in Claim 1, wherein the DFT spreader is configured to provide the spread-OFDM signal with an orthogonal code space.
6. The transmitter recited in Claim 1, wherein the DFT spreader comprises a precoder configured to provide at least one of pre-coding, pre-equalization, and pulse shaping to the spread-OFDM signal.
7. A transmitter comprising a processor; and a memory coupled to the processor, the memory including instructions stored therein and executable by the processor to:

spread a block of original data symbols with a discrete Fourier transform (DFT)-based spreading matrix to produce a plurality of spread data symbols;

responsive to channel-dependent scheduling that assigns a set of uplink orthogonal frequency division multiplex (OFDM) subcarriers to the UE based on favorable channel conditions between the transmitter and at least one wireless wide area network (WWAN) access terminal, map each non-zero spread data symbol to one of the set of uplink OFDM subcarriers; and

modulate the plurality of spread data symbols onto the set of uplink OFDM subcarriers to generate a spread-OFDM signal for transmission into the WWAN;

wherein at least one of the DFT-based spreading matrix and the plurality of spread data symbols is configured to provide the spread-OFDM signal with a low PAPR.

8. The transmitter recited in Claim 7, wherein the low PAPR equals a PAPR corresponding to a single-carrier signal.
9. The transmitter recited in Claim 7, wherein the uplink OFDM subcarriers comprise at least one of contiguous subcarriers and non-contiguous subcarriers.
10. The transmitter recited in Claim 7, wherein the block of original data symbols is spread using a fast transform algorithm.
11. The transmitter recited in Claim 7, wherein the DFT-based spreading matrix is configured to provide the spread-OFDM signal with an orthogonal code space.
12. The transmitter recited in Claim 7, wherein the DFT-based spreading matrix is configured to provide for at least one of pre-coding, pre-equalization, and pulse shaping to the spread-OFDM signal.
13. A transmitter configured to reside in a User Equipment (UE), comprising
 - a discrete Fourier transform (DFT) spreader configured to spread a block of original data symbols with a DFT-based spreading matrix to produce a plurality of spread data symbols;
 - a subcarrier mapper responsive to scheduling that assigns a set of uplink orthogonal frequency division multiplex (OFDM) subcarriers to the UE, the subcarrier mapper

- configured to map each non-zero spread data symbol to one of the set of uplink OFDM subcarriers; and
- an inverse-DFT configured to modulate the plurality of spread data symbols onto the set of uplink OFDM subcarriers to generate a spread-OFDM signal for transmission into a wireless wide area network (WWAN);
- wherein at least one of the DFT spreader and the subcarrier mapper configures the spread data symbols to provide the spread-OFDM signal with a low PAPR.
14. The transmitter recited in Claim 13, wherein the DFT spreader is configured to operate as at least one of the inverse-DFT and a DFT demodulator used for demodulating received OFDM signals.
15. The transmitter recited in Claim 13, wherein the low PAPR equals a PAPR corresponding to a single-carrier signal.
16. The transmitter recited in Claim 13, wherein the uplink OFDM subcarriers comprise at least one of contiguous subcarriers and non-contiguous subcarriers.
17. The transmitter recited in Claim 13, wherein the DFT spreader is configured to perform a fast transform algorithm.
18. The transmitter recited in Claim 13, wherein the DFT spreader is configured to provide the spread-OFDM signal with an orthogonal code space.
19. The transmitter recited in Claim 13, wherein the DFT spreader comprises a precoder configured to provide at least one of pre-coding, pre-equalization, and pulse shaping to the spread-OFDM signal.
20. A transmitter comprising a processor; and a memory coupled to the processor, the memory including instructions stored therein and executable by the processor to:
- spread a block of original data symbols with a discrete Fourier transform (DFT)-based spreading matrix to produce a plurality of spread data symbols;
- responsive to channel-dependent scheduling that assigns a set of uplink orthogonal frequency division multiplex (OFDM) subcarriers to the UE, map each non-zero spread data symbol to one of the set of uplink OFDM subcarriers; and

modulate the plurality of spread data symbols onto the set of uplink OFDM subcarriers to generate a spread-OFDM signal for transmission into a wireless wide area network (WWAN);

wherein at least one of the DFT-based spreading matrix and the plurality of spread data symbols is configured to provide the spread-OFDM signal with a low PAPR.

21. The transmitter recited in Claim 20, wherein the instructions executable by the processor to spread the original data symbols is configured to at least one of modulate the plurality of spread data symbols onto the set of uplink OFDM subcarriers and demodulate a received OFDM signal.
22. The transmitter recited in Claim 20, wherein the low PAPR equals a PAPR corresponding to a single-carrier signal.
23. The transmitter recited in Claim 20, wherein the uplink OFDM subcarriers comprise at least one of contiguous subcarriers and non-contiguous subcarriers.
24. The transmitter recited in Claim 20, wherein the plurality of spread data symbols is generated using a fast transform algorithm.
25. The transmitter recited in Claim 20, wherein the DFT-based spreading matrix is configured to provide the spread-OFDM signal with an orthogonal code space.
26. The transmitter recited in Claim 20, wherein the DFT-based spreading matrix is configured to provide at least one of pre-coding, pre-equalization, and pulse shaping to the spread-OFDM signal.

Abstract

An OFDM transmitter spreads original data symbols with a complex-valued spreading matrix derived from a discrete Fourier transform. Spread data symbols are mapped to OFDM subcarriers. Spreading and mapping are configured to produce a transmitted spread-OFDM signal with a low peak-to-average power ratio (PAPR) and orthogonal code spaces. In MIMO systems, the complex-valued spreading matrix can comprise a MIMO precoding matrix, and the code spaces can comprise MIMO subspaces. In Cooperative-MIMO, a combination of low code-space cross correlation and low PAPR can be achieved.

SCORE Placeholder Sheet for IFW Content

Application Number: 15642850

Document Date: 07/06/2017

The presence of this form in the IFW record indicates that the following document type was received in electronic format on the date identified above. This content is stored in the SCORE database.

- Drawings – Other than Black and White Line Drawings

Since this was an electronic submission, there is no physical artifact folder. no artifact folder is recorded in PALM, and no paper documents or physical media exist. The TIFF images in the IFW record were created from the original documents that are stored in SCORE.

To access the documents in the SCORE database, refer to instructions below.

At the time of document entry (noted above):

- Examiners may access SCORE content via the eDAN interface.
- Other USPTO employees can bookmark the current SCORE URL (<http://Score.uspto.gov/ScoreAccessWeb/>).
- External customers may access SCORE content via the Public and Private PAIR interfaces.

Form Revision Date: September 30, 2013

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875				Application or Docket Number 15/642,850		Filing Date 07/06/2017		☐ To be Mailed		
ENTITY: ☐ LARGE ☒ SMALL ☐ MICRO										
APPLICATION AS FILED – PART I										
(Column 1)		(Column 2)								
FOR		NUMBER FILED		NUMBER EXTRA		RATE (\$)		FEE (\$)		
☐ BASIC FEE (37 CFR 1.16(a), (b), or (c))		N/A		N/A		N/A				
☐ SEARCH FEE (37 CFR 1.16(k), (i), or (m))		N/A		N/A		N/A				
☐ EXAMINATION FEE (37 CFR 1.16(o), (p), or (q))		N/A		N/A		N/A				
TOTAL CLAIMS (37 CFR 1.16(i))		minus 20 =		*		X \$ =				
INDEPENDENT CLAIMS (37 CFR 1.16(h))		minus 3 =		*		X \$ =				
☐ APPLICATION SIZE FEE (37 CFR 1.16(s))		If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$310 (\$155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).								
☐ MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))										
* If the difference in column 1 is less than zero, enter "0" in column 2.						TOTAL				
APPLICATION AS AMENDED – PART II										
(Column 1)		(Column 2)		(Column 3)						
AMENDMENT	07/06/2017		CLAIMS REMAINING AFTER AMENDMENT			HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE (\$)	ADDITIONAL FEE (\$)	
	Total (37 CFR 1.16(i))		* 24		Minus	** 24	= 0	x \$40 =	0	
	Independent (37 CFR 1.16(h))		* 3		Minus	***3	= 0	x \$210 =	0	
	☐ Application Size Fee (37 CFR 1.16(s))									
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
								TOTAL ADD'L FEE		0
(Column 1)		(Column 2)		(Column 3)						
AMENDMENT			CLAIMS REMAINING AFTER AMENDMENT			HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE (\$)	ADDITIONAL FEE (\$)	
	Total (37 CFR 1.16(i))		*		Minus	**	=	X \$ =		
	Independent (37 CFR 1.16(h))		*		Minus	***	=	X \$ =		
	☐ Application Size Fee (37 CFR 1.16(s))									
	☐ FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
								TOTAL ADD'L FEE		
* If the entry in column 1 is less than the entry in column 2, write "0" in column 3. ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20". *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3". The "Highest Number Previously Paid For" (Total or Independent) is the highest number found in the appropriate box in column 1.										

This collection of information is required by 37 CFR 1.16. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.