



(19) **United States**

(12) **Patent Application Publication**

McFarland

(10) **Pub. No.: US 2002/0006167 A1**

(43) **Pub. Date: Jan. 17, 2002**

(54) **MULTI-CARRIER COMMUNICATION SYSTEMS EMPLOYING VARIABLE SYMBOL RATES AND NUMBER OF CARRIERS**

(57) **ABSTRACT**

(76) Inventor: **William McFarland**, Los Altos, CA (US)

Correspondence Address:
PILLSBURY WINTHROP LLP
Ninth Floor, East Tower
1100 New York Avenue, N.W.
Washington, DC 20005-3918 (US)

(21) Appl. No.: **09/839,565**

(22) Filed: **Apr. 20, 2001**

Related U.S. Application Data


(63) Non-provisional of provisional application No. 60/199,049, filed on Apr. 22, 2000.

Publication Classification

(51) Int. Cl.⁷ **H04K 1/10; H04L 27/28; H04L 23/00**

(52) U.S. Cl. **375/260; 375/377**

A multi-carrier communication system such as an OFDM or DMT system has nodes which are allowed to dynamically change their receive and transmit symbol rates, and the number of carriers within their signals. Changing of the symbol rate is done by changing the clocking frequency of the nodes' iFFT and FFT processors, as well as their serializers and deserializers. The nodes have several ways of dynamically changing the number of carriers used. The selection of symbol rate and number of carriers can be optimized for a given channel based on explicit channel measurements, a priori knowledge of the channel, or past experience. Provision is made for accommodating legacy nodes that may have constraints in symbol rate or the number of carriers they can support. The receiver can determine the correct symbol rate and number of carriers through a priori knowledge, a first exchange of packets in a base mode that all nodes can understand, or an indication in the header of the data packet which is transmitted in a base mode of operation that all nodes can understand.

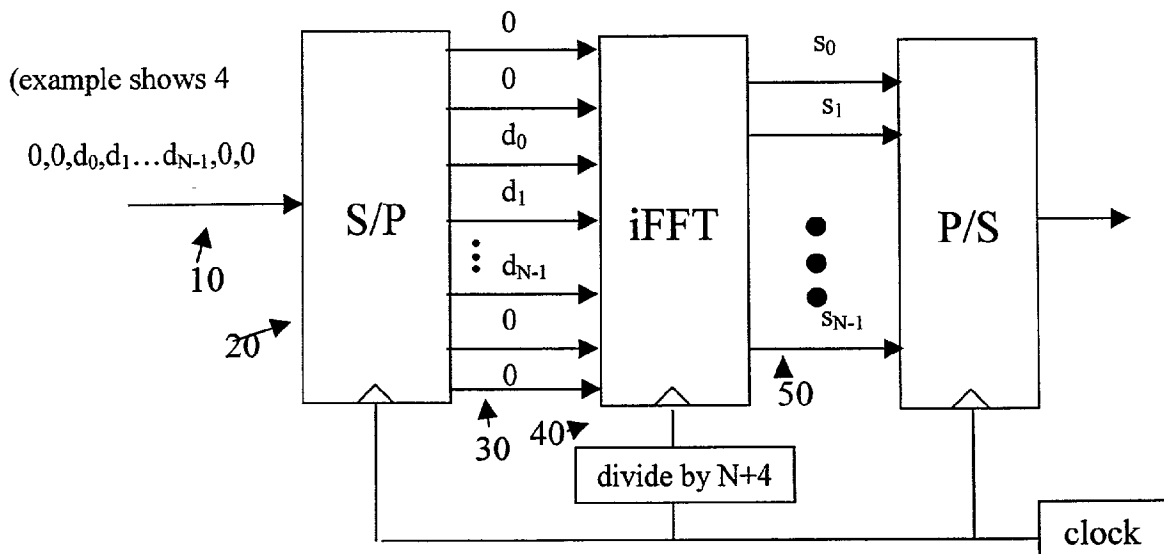

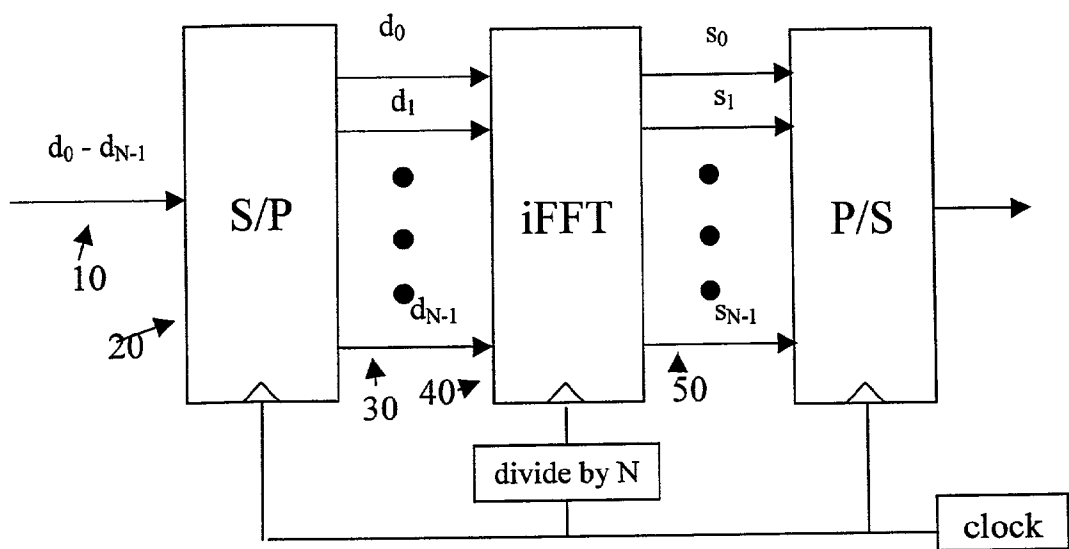


FIG. 1

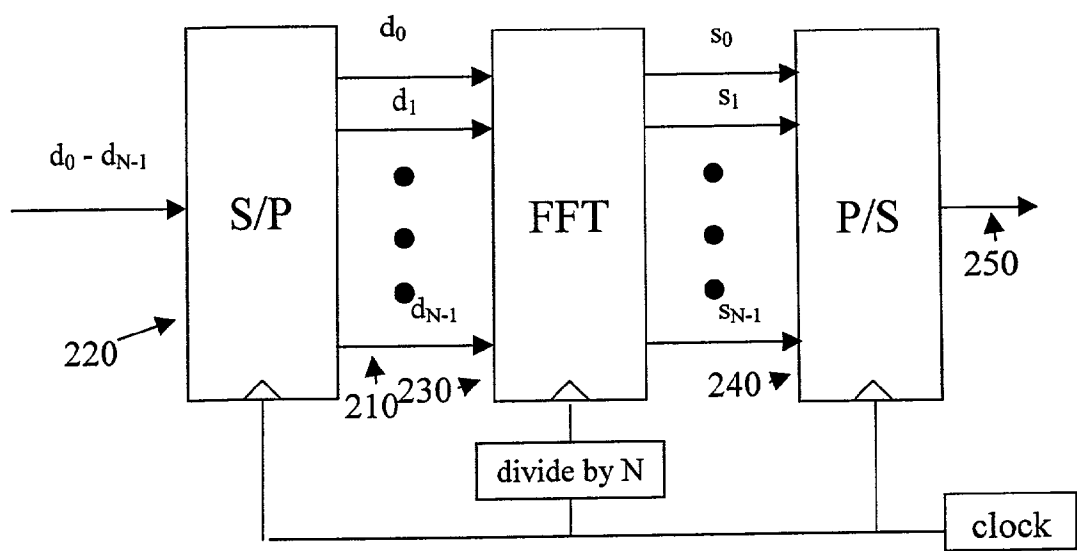


FIG. 2

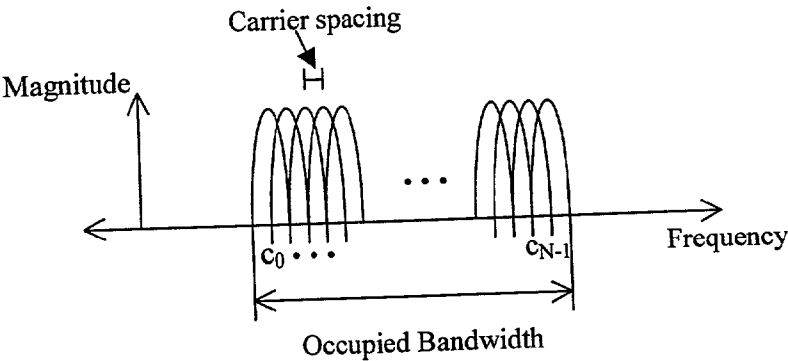


FIG. 3

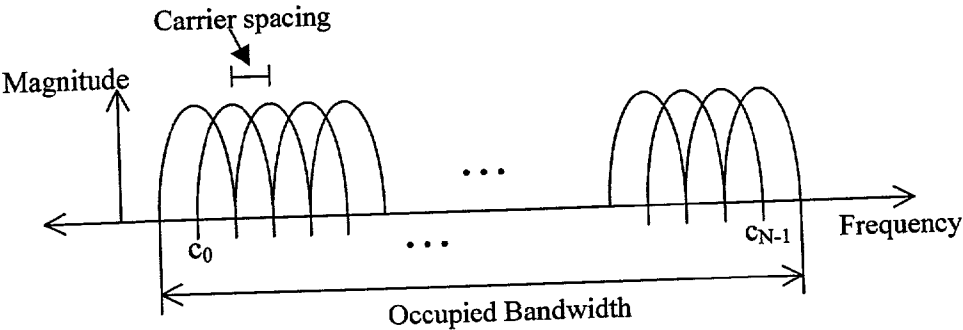


FIG. 4

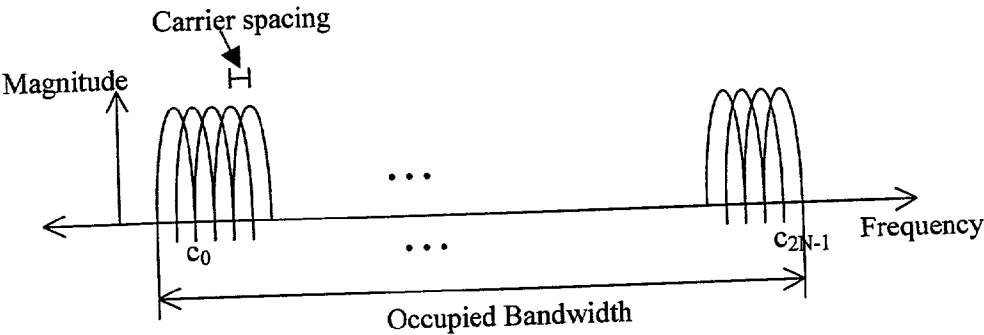


FIG. 5

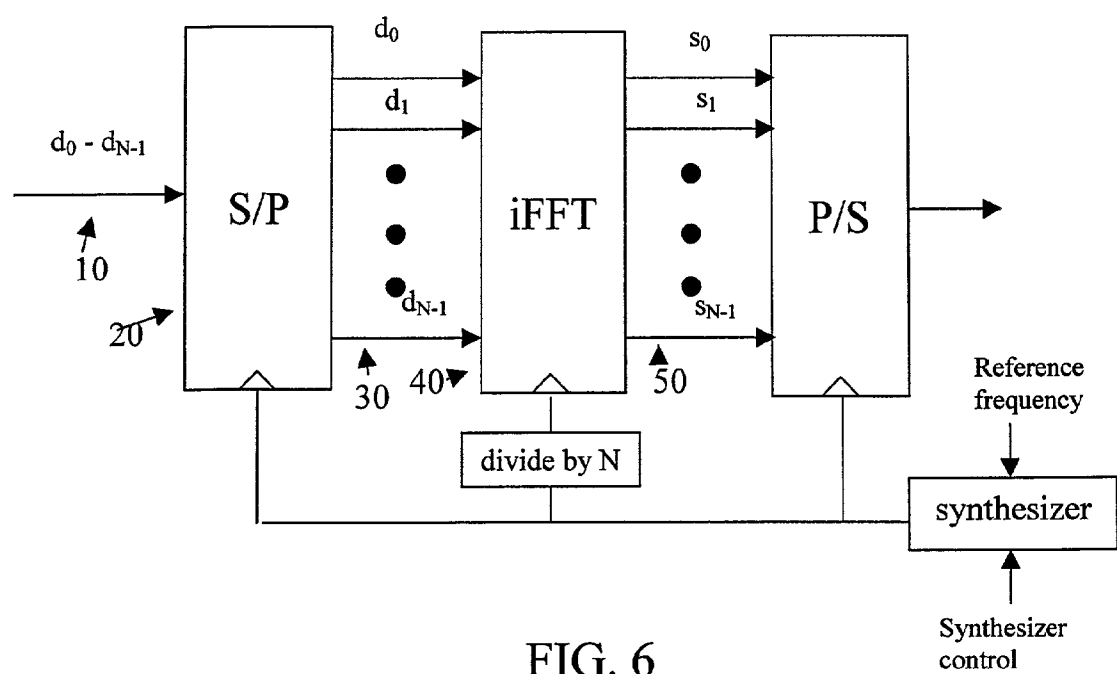


FIG. 6

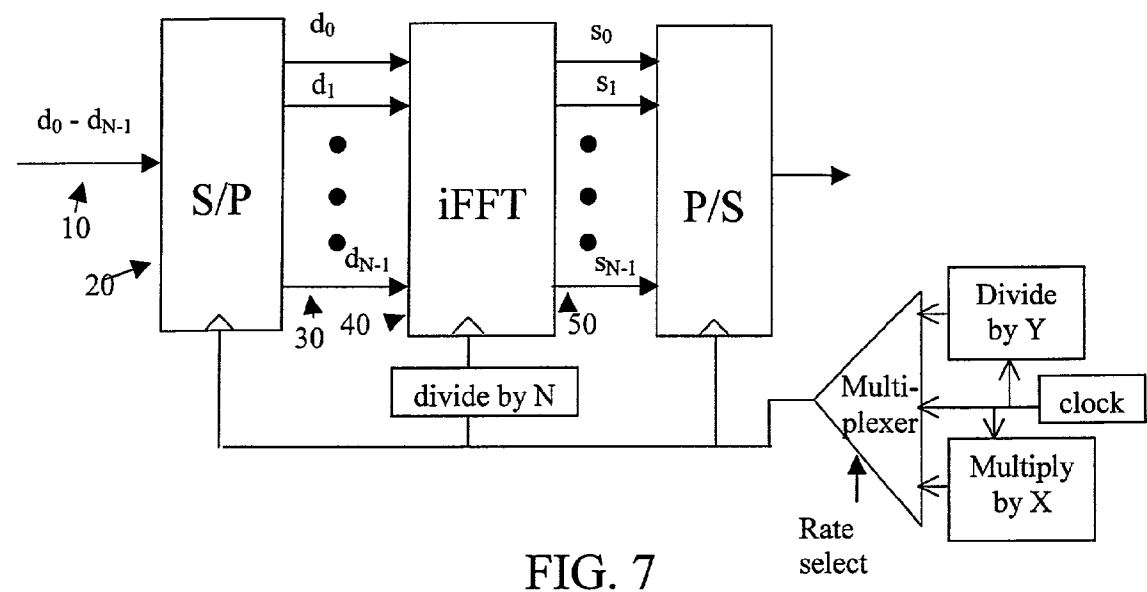


FIG. 7

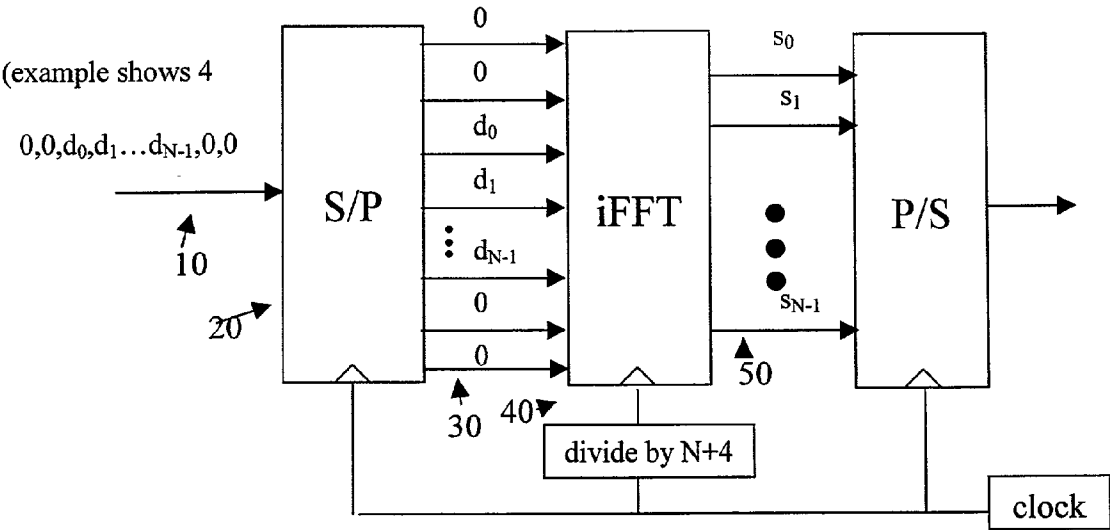


FIG. 8

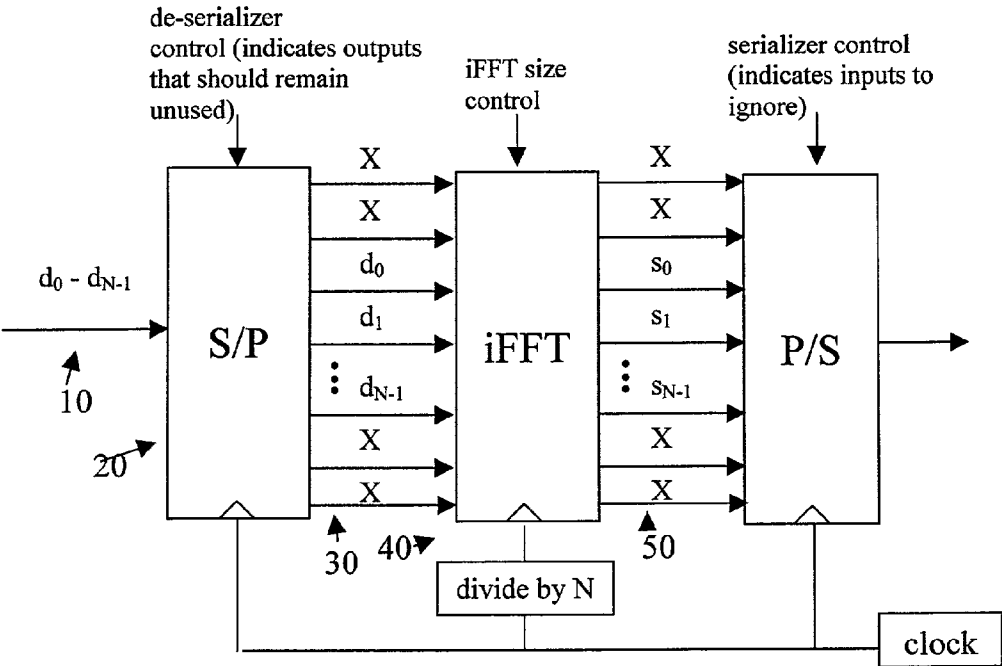


FIG. 9

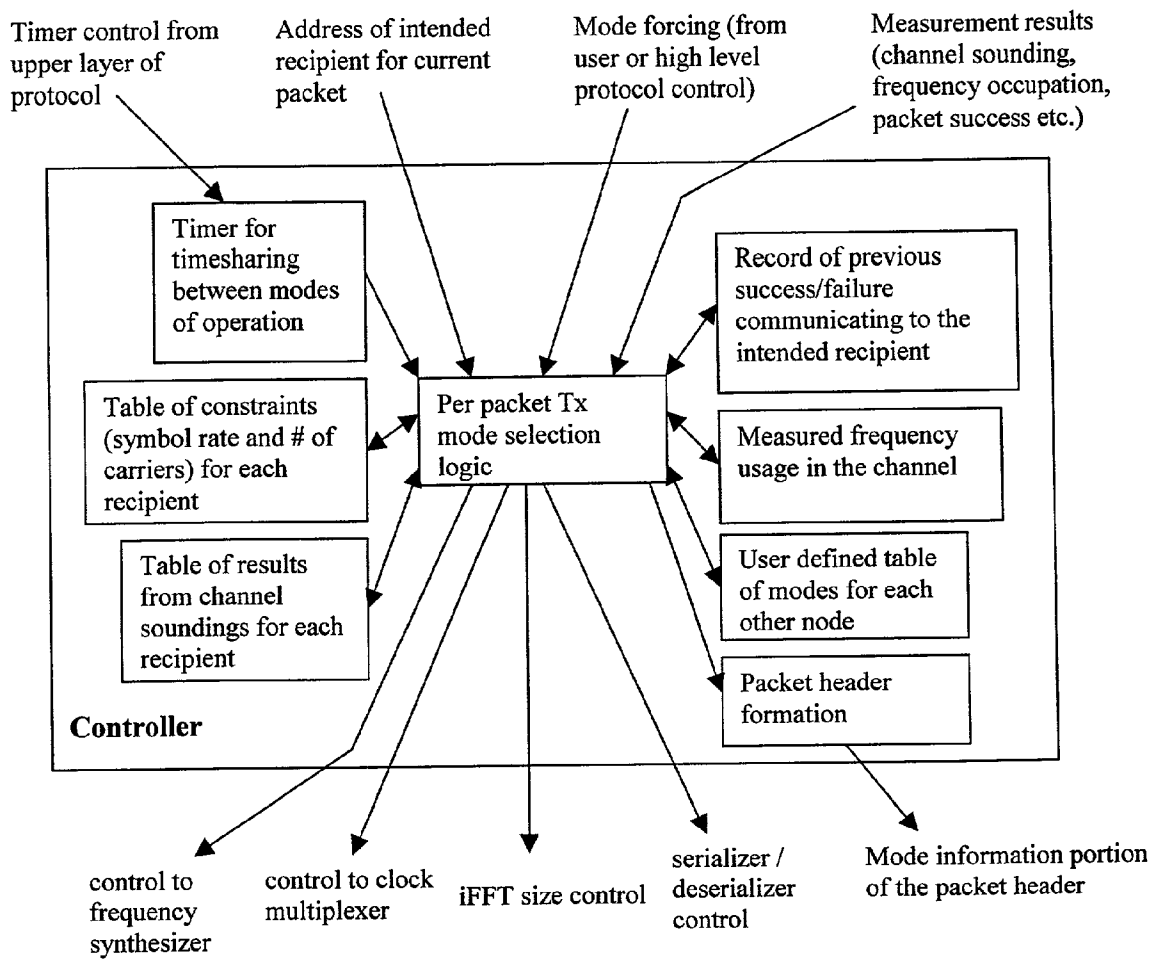


FIG. 10

MULTI-CARRIER COMMUNICATION SYSTEMS EMPLOYING VARIABLE SYMBOL RATES AND NUMBER OF CARRIERS

[0001] This application claims priority on U.S. Provisional Application No. 60/199,049 filed Apr. 22, 2000.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention is generally directed to communication systems and networks and is particularly directed to such systems and networks which use multi-carrier protocols such as orthogonal frequency division multiplexing and discrete multi-tone protocols, and to techniques for communicating thereover.

[0004] 2. Background of Related Art

[0005] Orthogonal frequency division multiplexing (OFDM) and discrete multi-tone (DMT) are two closely related formats which have become popular as communication protocols. Systems of this type take a relatively wide bandwidth communication channel and break it into many smaller frequency sub-channels. The narrower sub-channels are then used simultaneously to transmit data at a high rate. These techniques have advantages when the communication channel has multi-path or narrow band interference.

[0006] The following discussion of the prior art and the invention will address OFDM systems; however, it will be understood that the invention is equally applicable to DMT systems (as well as other types of communication systems) with only minor modifications that will be readily apparent to those skilled in the art.

[0007] A functional block diagram of a typical OFDM transmitter is shown in **FIG. 1**. Here, an incoming stream **10** of N symbols $d_0, d_1, \dots, d_{N-1}$ is mapped by a serial-to-parallel converter **20** over N parallel lines **30**, each line corresponding to a particular subcarrier within the overall OFDM channel. An Inverse Fast Fourier Transform (iFFT) processor **40** accepts these as frequency domain components and generates a set **50** of time domain subcarriers corresponding thereto. Each set of time domain subcarriers is considered a symbol. The rate at which these symbols are created determines the rate at which transitions are made on each of the individual carriers (one transmission per symbol time). The time domain subcarriers are converted by a parallel-to-serial converter **60**. Due to the characteristics of the inverse Fourier transform, although the frequency spectra of the subcarrier channels overlap, each subcarrier is orthogonal to the others. Thus, the frequency at which each subcarrier in the received signal is evaluated is one at which the contribution from all other signals is zero.

[0008] A functional block diagram of the corresponding OFDM receiver is shown in **FIG. 2**. Here, an OFDM signal is received and converted into multiple time domain signals **210** by a serial-to-parallel converter **220**. These signals are processed by a Fast Fourier Transform (FFT) processor **230** before being multiplexed by parallel-to-serial converter **240** to recover the original data stream **250**.

[0009] **FIG. 3** shows a plot of the transmitted frequency spectrum from an OFDM system. The number of carriers within the signal is determined by the size of the iFFT processor in the transmitter and corresponding size of the

FFT processor in the receiver. The spacing of the individual carriers within the signal is dependent on the rate at which the iFFT symbols are generated (the symbol rate). This is generally proportional to the rate at which the iFFT and FFT processors are being clocked. Finally, the overall bandwidth occupied by the signal is roughly equivalent to the number of carriers multiplied by the carrier spacing.

[0010] The symbol rate is generally chosen to limit the effect of multi-path interference in the channel. When the rate of iFFT/FFT symbol generation is low, the rate of the symbols going over the channel is slow, and the carrier spacing is close. These slow symbols are long in time, much longer than the longest echoes within the multi-path delays of the channel. Therefore, it is possible to avoid or minimize the multi-path echoes, since they are much shorter than the data symbols themselves.

[0011] In some multi-carrier systems, the amount of power allocated to each carrier is varied according to the quality of the channel over which the signal will be sent. In addition, the complexity of the modulation constellation is also varied according to the channel on a per carrier basis. For example, some carriers may use 4-QAM modulation, while others use 16-QAM, 64-QAM or even more complex modulation. The more complex modulations allow more data to be transmitted in a single symbol or period of time. However, they require a much better signal to noise ratio in order to operate correctly. In other systems, it may be difficult to determine details about the channel, or the channel may change rapidly in time, such that this adaptation of the multi-carrier transmission is not practical. Rapidly changing channel conditions are common in radio communications.

[0012] Although some existing multi-carrier systems adapt the power allocation and modulation complexity as described above, existing multi-carrier systems maintain a constant number of carriers (constant size of the iFFT and FFT processors) and a constant carrier spacing (constant rate of iFFT/FFT symbol generation), and therefore a constant overall occupied bandwidth. The constant carrier spacing is chosen to insure that multi-path echoes are a small portion of the data symbol time in all possible channels that the communication system might encounter.

[0013] It is advantageous to minimize the number of carriers in use. The number of carriers is directly related to the size of the iFFT processor in the transmitter and corresponding FFT processor in the receiver. The complexity and power consumption of an iFFT or FFT processor increases as $N \cdot \log(N)$, where N is the size of the processor, and therefore the number of carriers present in the signal. To limit complexity and particularly power consumption, it is therefore desirable to minimize the number of carriers in use. Additionally, it is desirable to generate the iFFT/FFT symbols at the highest rate possible. This increases the symbol rate, and thereby increases the data rate within the channel. Taken together, the goal of low complexity, low power, and high data rate pushes toward a system with few carriers and a high iFFT/FFT symbol generation rate. However, there is a limitation. As the symbol rate becomes higher, the symbols become shorter in time. For a given channel, the multi-path echoes will become a larger fraction of the symbol time, and will increasingly corrupt the communication. In addition, since the total bandwidth occupied is roughly equal to the number of carriers times the carrier

spacing (proportional to the symbol rate), the overall occupied bandwidth may also increase as the symbol rate is increased.

[0014] Existing multi-carrier systems, which maintain a fixed number of carriers, a fixed symbol rate, and a fixed overall bandwidth, do not operate under optimal conditions. Because these fixed parameters must be chosen to accommodate the worst possible channel conditions, they are often far too conservative and not optimal for the channel currently available.

SUMMARY OF THE INVENTION

[0015] In view of the above problems of the prior art, an object of the present invention is to provide a multi-carrier system in which the number of carriers, the symbol rate, and thereby the overall occupied bandwidth can be varied. This can provide a more optimal combination of data rate, power consumption, and circuit complexity for a given channel.

[0016] It is another object of the present invention to provide a control system that regulates the operational mode of a multi-carrier system with regard to the number of carriers, symbol rate, and occupied bandwidth. This control system may operate based on a priori knowledge of the channel conditions (in response to a sounding of the channel), or in a trial and error fashion.

[0017] It is a further object of the present invention to provide a method for dynamically changing the number of carriers, symbol rate, and occupied bandwidth in a multi-carrier communication system on a packet-to-packet basis.

[0018] The above objects are achieved according to one aspect of the present invention by changing the size and clocking rate of iFFT and FFT processors used in a multi-carrier communication system as well as their surrounding circuits. Control signals for these changes in operation can be derived from a controlling circuit that has user inputs; results from channel sounding, a history of trial and error results, or information in the beginning of a received data packet.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] These and other objects, features, and advantages of the present invention are better understood by reading the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings, in which:

[0020] FIG. 1 is a block diagram of an OFDM transmitter according to the prior art;

[0021] FIG. 2 is a functional block diagram of an OFDM receiver according to the prior art;

[0022] FIG. 3 is a diagram of the spectrum of a transmitted OFDM waveform;

[0023] FIG. 4 is a diagram of the spectrum of the transmitted waveform when the symbol rate is doubled;

[0024] FIG. 5 is a diagram of the spectrum of the transmitted waveform when the size of the iFFT processor is doubled;

[0025] FIG. 6 shows a preferred embodiment of the present invention which changes the symbol rate with a frequency synthesizer;

[0026] FIG. 7 shows an embodiment which changes the symbol rate with a divider;

[0027] FIG. 8 shows an embodiment which changes the number of carriers with a single fixed iFFT processor;

[0028] FIG. 9 shows an embodiment which changes the number of carriers with a variable size iFFT processor block; and

[0029] FIG. 10 shows a controller unit that has a variety of control inputs for determining the symbol rate and number of carriers that is optimal for a given situation.

DETAILED DESCRIPTION OF PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

[0030] FIG. 4 shows the transmitted spectrum of an OFDM signal in which the symbol rate has been doubled in comparison to the one shown in FIG. 3. The carrier spacing has doubled, as has the overall occupied bandwidth. Such a signal would be able to transmit at twice the data rate compared to the system in FIG. 3. However, since the symbol rate has doubled and therefore the symbol duration halved, it would be more susceptible to multi-path echoes.

[0031] FIG. 5 shows the transmitted spectrum of an OFDM signal in which the number of carriers is doubled, but the symbol time remains constant. This approach also doubles the occupied bandwidth and the data rate relative to FIG. 3. However, since the symbol rate is unchanged, it remains resistant to long multi-path echoes. Unfortunately, this approach requires more complex iFFT and FFT processors which consume more power and are more expensive to build.

[0032] For a given channel, there is an optimal occupied bandwidth, symbol rate, and thereby number of separate carriers. It is therefore beneficial to be able to vary both the symbol rate and the size of the iFFT processor according to the quality of the current channel.

[0033] Variable Symbol Rate

[0034] Many methods known in the art for changing a clock frequency can be used to change the symbol rate of the multi-carrier system. The following discussion describes several preferred embodiments for varying the symbol rate. As can be seen from the similarity of the transmitting circuit and receiving circuits in FIGS. 1 and 2, almost any approach for changing the symbol rate at the transmitter can be used in a similar fashion at the receiver.

[0035] FIG. 6 shows a circuit for changing the OFDM symbol rate. In this circuit, a frequency synthesizer (or variable phase locked loop) is able to generate nearly any arbitrary frequency with which to clock the iFFT processor and its surrounding serial-to-parallel and parallel-to-serial converters. The advantage to this approach is the symbol rate can be finely adjusted to ideally optimize for a given channel. A disadvantage to this approach is that it takes a significant time for the synthesizer to change its frequency. Therefore, it would not be practical to have the synthesizer change frequency on a packet-by-packet basis in a fast communication system (situations in which changing the symbol rate on a packet-by-packet basis would be desired are presented later).

[0036] FIG. 7 shows a circuit for changing the symbol rate using dividers and multipliers. A multiplexer can be used in

order to choose which of the circuits is used at a given time. In the drawing, the dividers have variable divide and multiplication amounts. In practice it might be desirable to use circuits that can only divide by fixed amounts, and select among several of them using a multiplexer as shown. The advantage to this approach is that the changing of clocking frequencies can be done very quickly and in a very well controlled way. This would allow the dynamic changing of symbol rate between packets, or even within packets in a communication system. The disadvantage to this approach is that the symbol rate can not be as finely adjusted as in the case of a frequency synthesizer.

[0037] Variable Number of Carriers

[0038] There are a number of ways to change the number of carriers in active use. The following discussion illustrates several preferred embodiments for changing the number of carriers in active use. As before, almost any approach for changing the number of carriers at the transmitter can be used in a similar fashion at the receiver.

[0039] FIG. 8 shows an approach in which a single iFFT processor can be used without modification to generate a different number of carriers. The iFFT is designed to be sufficiently large enough to handle the maximum number of carriers that might ever be required. In any given situation, a subset of the carriers can be used by simply inputting zero magnitude signals on the carriers that are not to be used. This has the advantage of requiring little change to the overall circuitry and no change at all to the iFFT processor. The disadvantage is that the power savings from using a smaller number of carriers will be minimal.

[0040] Another approach is to implement a block of multiple complete iFFT processors of various sizes. For a given transmission, only one of these would be operated. This has the advantage that since only the appropriately-sized processor is in use, the power consumption will be minimized. Unfortunately, fabricating several different sizes of iFFT and FFT processors increases the complexity and thus the cost of the circuit.

[0041] FIG. 9 shows a circuit in which the iFFT processor itself has been designed to disable portions of its internal circuitry depending on how many carriers are active. Similarly, the serial-to-parallel and parallel-to-serial converters also alter their operation, so they act only on carriers that will actually be used at a given time. This allows the construction of one block of circuitry which operates in a power-efficient manner in all modes of operation.

[0042] In general, iFFT and FFT processor sizes come in powers of two. There are structures that can produce an arbitrary number of carriers, but these are less efficient. The number of carriers used can therefore be restricted to be a power of two, or the iFFT and FFT processors can be operated at the power of two size equal to or just larger than the number of carriers desired. The technique shown in FIG. 8 can then be used to trim this nearest power of two down to the actual desired size.

[0043] It is also possible to change the symbol rate and the number of carriers simultaneously. For example, if the channel could allow both a doubling of the symbol rate (due to low time delay in the multi-path echoes), and a quadrupling of the occupied bandwidth (due to an exceptionally broad channel or few other users to share with), it would

make sense to simultaneously double the number of carriers and the symbol rate. These changes taken together would allow a quadrupling of the data rate in the channel.

[0044] Control of Symbol Rate and Number of Carriers

[0045] FIG. 10 shows a controller unit which accepts several inputs. Based on these inputs, the controller decides the appropriate symbol rate and number of carriers according to the techniques set forth below. Each of the inputs represents a factor that is important in the decision of what symbol rate and number of carriers is appropriate to use. For example, a timer input may be used to indicate to the controller that it should operate in a predetermined mode, such as legacy mode, for a period of time, while another input allows a user or higher protocol layer to arbitrarily force the controller to operate in a particular mode. Any number of inputs could be used, but the shown preferred approach combines the factors listed below. For convenience, in the following section the combination of symbol rate and number of carriers will be called the operating "mode".

[0046] Setting the Operating Mode Based on Prior Knowledge

[0047] The desired operating mode may be based upon prior knowledge of the quality of the channel a node will encounter. For example, if a controller knows it has a very short (in terms of distance) communication channel with weak and short multi-path echoes, it can force the nodes on the network to operate with a high symbol rate. Similarly, if it knows there is a lot of spectrum available because the channel is wide and the channel bandwidth does not need to be shared with other systems, it can force the nodes in the network to operate with a high symbol rate (if there is little multi-path echo) or with many carriers (if there is significant multi-path echo).

[0048] It may be advantageous to set all nodes communicating in a given network to the same operating mode. This enables all nodes to understand all messages, and prevents them from having to quickly change from one operating mode to another. On the other hand, the channel between a given pair of nodes may be different than the channel between other pairs in the network. If this is known, and maximum efficiency is desired, it may be best to assign the operating mode on a pair-by-pair basis. Therefore, a given node may transmit in a different mode depending on which node it is transmitting to. This will require nodes to change modes, potentially on a packet-by-packet basis, depending on who is sending or receiving the current packet.

[0049] Setting the Operating Mode Based on Measurement

[0050] The best operating mode could be based on a trial "sounding" of the communications channel. The transmitter would send out a special signal (e.g., a reference signal having constant and known phase/magnitude characteristics that can be easily observed) or packet of information. The receiver would analyze this signal to determine the quality of the channel. Factors would include the multi-path delay as well as the total available bandwidth. These observations would be sent back to the original transmitter, presumably using a very robust mode of transmission, or at least a mode of transmission that is receivable for the channel in question. At this point, both nodes will be aware of the channel

conditions. The channel sounding signal ideally would span the maximum bandwidth that the nodes would consider using. However, it may be possible to infer many things about the channel (such as multi-path echoes) using a narrower bandwidth signal. In addition, it may be possible to determine some channel degradations, such as if another node is using a portion of the channel, simply by listening to the channel.

[0051] It may be preferred not to send a unique channel sounding message for efficiency reasons. Instead, the nodes could transmit at a base mode, i.e., a mode which all nodes can understand, even in a worst-case scenario. Assuming that is successful, the nodes could move to more and more complex, and higher data rate, modes. Eventually when communication fails, they would have learned the highest rate at which communication can be achieved. The same process could be followed in reverse, starting from the highest mode and backing down to the lowest mode until transmission is successful.

[0052] Once the best mode for communication has been established between a particular pair of devices, this mode can be stored and used in the future without repeating the initial learning process. However, the channel may change over time, particularly if it is a radio channel. In that case, periodic relearning, or period experimenting to see which modes work or don't, might be required.

[0053] Changing the Operating Mode on a Packet-by-packet Basis

[0054] There are several reasons to change the mode of communication on a packet-by-packet basis. At the receiver, a packet from one transmitting node may be followed by a packet from a different transmitting node. The channel may be different for the two transmitting nodes, and therefore they may have decided to use different modes for their transmission. In addition, the different transmitting nodes may have different capabilities, forcing them to employ different modes of transmission. In either case, the receiving node needs to quickly change its mode based on the arriving packet.

[0055] A preferred approach might be to have a short header on the packet that would be in a base mode that all nodes could receive and would always expect at the beginning of the packet. Within that header would be an indication of which mode the remainder of the packet will be in. The receiver would then quickly switch modes to receive the remainder of the packet.

[0056] Similarly, when transmitting, the mode may need to be adjusted on a packet-by-packet basis to accommodate different destinations. Different destinations may be through different channels with different bandwidths, multi-path echo, or interference from other users. In addition, a given destination might support only a subset of the available modes of the transmitter. In particular, previous generation devices may not support as many different modes as newer devices. In all cases, the transmitting node will need to be able to change modes for each packet destination. Preferably, it should signal the mode a particular packet is going to use in the header of the packet as described above.

[0057] Another way to support "legacy" nodes that do not operate in the newer modes is to have a period of time during which all nodes act in a legacy mode. This period of time can

be fixed, or it can be determined by listening for legacy nodes to request service. For example, in a radio network, an access point or a base station could periodically send a message in a legacy mode asking if any nodes that can only operate in that mode require service. If it gets a response, the base station could then schedule a period of time of operation in the legacy mode so those nodes could accomplish their tasks.

[0058] Respecting Constraints

[0059] While a node has a tremendous number of possible modes to choose from, the controller unit should be sure to stay within certain constraints. One constraint would be the total consumed bandwidth. In radio systems, the FCC regulates the usage of the spectrum. The controlling circuit must insure that whatever mode is chosen will not violate FCC rules. Similarly, the FCC limits the spurious emissions that may emanate from wired communication systems. These limitations are dependent in part on the frequency of the spurious emissions. Once again it is important to limit the total bandwidth of the transmitted signal.

[0060] Another constraint described above is that all nodes may not support all modes. Broadcast messages, or any other messages that need to be received by multiple nodes, must be transmitted in a mode that all nodes to which they are directed are able to receive.

[0061] Communicating the Mode of Operation

[0062] One method for communicating the mode of operation, as disclosed above, is to signal it in the header of the packet. If nodes are not able to change modes very quickly (within the middle of a packet) it might be preferred to send a first short exchange establishing the mode at which the data communication will take place. This first short exchange would be done with a base mode of operation that all nodes support.

[0063] If the mode of operation will not be changed on a packet-by-packet basis, a user might manually configure all nodes in a network with a single operating mode, or with a table that describes the operating mode for each possible connection. On the other hand, the user might program only one node in such a manner and have other nodes learn of the desired node setting through communication with other nodes. For example, when a new node enters a network, it could learn of the operating mode by listening to the other nodes in the network, either seeing which operating mode they are in, or receiving a packet header or special packet. The special packet might indicate what mode they are in or might contain the complete table of which nodes employ which modes of operation. The packet header or special packet could be transmitted in some base mode that all nodes are guaranteed to support.

[0064] The present invention has been described above in connection with preferred embodiments thereof; however, this has been done for purposes of illustration only, and the invention is not so limited. Indeed, variations of the invention will be readily apparent to those skilled in the art and also fall within the scope of the invention. For example, although preferred embodiments of the present invention are implemented using a wireless communication medium, it will be readily apparent to those skilled in the art that it may be applied to a number of other communication media with similar benefits. Such variations also fall within the scope of the claims appended hereto.

What is claimed is:

1. A method of communicating between a transmitter and a receiver in a wireless multicarrier system comprising the steps of:

setting in the transmitter an initial number of carriers and an initial symbol rate at which symbols are transmitted from the transmitter to the receiver;

transmitting a first group of symbols using the initial number of carriers and the initial symbol rate;

changing in the transmitter the rate at which symbols are transmitted from the transmitter to the receiver from the initial symbol rate to a subsequent symbol rate that is different than the initial symbol rate; and

transmitting a second group of symbols using the initial number of carriers and the subsequent symbol rate.

2. The method according to claim 1 wherein the step of changing the rate at which symbols are transmitted includes the step of changing a frequency output by a frequency synthesizer that is used to clock a serial to parallel converter, a divide by N counter coupled to an iFFT, and a parallel to serial converter.

3. The method according to claim 2 wherein the step of changing a frequency output by a frequency synthesizer uses a phase locked loop.

4. The method according to claim 1 wherein the step of changing the rate at which symbols are transmitted includes the step of changing a frequency that is used to clock a serial to parallel converter, a divide by N counter coupled to an iFFT, and a parallel to serial converter by changing a multiplexer output, thereby selecting a different circuit capable of generating the subsequent symbol rate rather than a previous circuit capable of generating the initial symbol rate.

5. The method according to claim 4 wherein the step of changing the multiplexer output selects between the different circuit and the previous circuit such that the different circuit and the previous circuit respectively provide a subsequent symbol clock rate and an initial symbol clock rate using at least one of a multiplier and divider.

6. A method of communicating between a transmitter and a receiver in a wireless multicarrier system comprising the steps of:

setting in the transmitter an initial number of carriers and an initial symbol rate at which symbols are transmitted from the transmitter to the receiver;

transmitting a first group of symbols using the initial number of carriers and the initial symbol rate;

changing in the transmitter the number of carriers in active use from the initial number of carriers to a subsequent number of carriers that is different than the initial number of carriers; and

transmitting a second group of symbols using the subsequent number of carriers.

7. The method according to claim 6 wherein the step of transmitting the second group of symbols transmits at the initial symbol rate.

8. The method according to claim 6 wherein the step of changing in the transmitter the number of carriers in active use includes the step of informing the transmitter of those carriers that were used in the initial number of carriers and

will not be used in the subsequent number of carriers by placing zero magnitude signals on those carriers within the transmitter.

9. The method according to claim 6 wherein the step of changing in the transmitter the number of carriers in active use includes the step of informing the transmitter of those carriers that were not used in the initial number of carriers and will be used in the subsequent number of carriers by placing data conveying signals into those carriers that previously had zero magnitude signals within the transmitter.

10. The method according to claim 6 wherein the step of changing in the transmitter the number of carriers in active use includes the steps of:

changing an iFFT size of an iFFT in the transmitter; and

changing a serializer control signal to change inputs of a parallel to serial converter that is coupled to the iFFT in the transmitter.

11. The method according to claim 6 wherein the step of changing in the transmitter the number of carriers in active use includes the step of changing an iFFT size of an iFFT in the transmitter by a factor that is a power of two.

12. The method according to claim 11 wherein the step of changing in the transmitter the number of carriers in active use further includes the step of informing the transmitter of those carriers that were used in the initial number of carriers and will not be used in the subsequent number of carriers by placing zero magnitude signals on those carriers within the transmitter.

13. The method according to claim 11 wherein the step of changing in the transmitter the number of carriers in active use further includes the step of informing the transmitter of those carriers that were not used in the initial number of carriers and will be used in the subsequent number of carriers by placing data conveying signals into those carriers that previously had zero magnitude signals within the transmitter.

14. A method of communicating between a transmitter and a receiver in a wireless multicarrier system comprising the steps of:

setting in the transmitter an initial number of carriers and an initial symbol rate at which symbols are transmitted from the transmitter to the receiver;

transmitting a first group of symbols using the initial number of carriers and the initial symbol rate;

changing in the transmitter the rate at which symbols are transmitted from the transmitter to the receiver from the initial symbol rate to a subsequent symbol rate that is different than the initial symbol rate;

changing in the transmitter the number of carriers in active use from the initial number of carriers to a subsequent number of carriers that is different than the initial number of carriers; and

transmitting a second group of symbols using the subsequent number of carriers and the subsequent symbol rate.

15. The method according to claim 14 wherein the step of changing the rate at which symbols are transmitted includes the step of changing a frequency output by a frequency synthesizer that is used to clock a serial to parallel converter, a divide by N counter coupled to an iFFT, and a parallel to serial converter.

16. The method according to claim 15 wherein the step of changing a frequency output by a frequency synthesizer uses a phase locked loop.

17. The method according to claim 14 wherein the step of changing the rate at which symbols are transmitted includes the step of changing a frequency that is used to clock a serial to parallel converter, a divide by N counter coupled to an iFFT, and a parallel to serial converter by changing a multiplexer output, thereby selecting a different circuit capable of generating the subsequent symbol rate rather than a previous circuit capable of generating the initial symbol rate.

18. The method according to claim 17 wherein the step of changing the multiplexer output selects between the different circuit and the previous circuit such that the different circuit and the previous circuit respectively provide a subsequent symbol clock rate and an initial symbol clock rate using at least one of a multiplier and divider.

19. The method according to claim 14 wherein the step of transmitting the second group of symbols transmits at the initial symbol rate.

20. The method according to claim 14 wherein the step of changing in the transmitter the number of carriers in active use includes the step of informing the transmitter of those carriers that were used in the initial number of carriers and will not be used in the subsequent number of carriers by placing zero magnitude signals on those carriers within the transmitter.

21. The method according to claim 14 wherein the step of changing in the transmitter the number of carriers in active use includes the step of informing the transmitter of those carriers that were not used in the initial number of carriers and will be used in the subsequent number of carriers by placing data conveying signals into those carriers that previously had zero magnitude signals within the transmitter.

22. The method according to claim 14 wherein the step of changing in the transmitter the number of carriers in active use includes the steps of:

- changing an iFFT size of an iFFT in the transmitter; and
- changing a serializer control signal to change inputs of a parallel to serial converter that is coupled to the iFFT in the transmitter.

23. The method according to claim 14 wherein the step of changing in the transmitter the number of carriers in active use includes the step of changing an iFFT size of an iFFT in the transmitter by a factor that is a power of two.

24. The method according to claim 23 wherein the step of changing in the transmitter the number of carriers in active use further includes the step of informing the transmitter of those carriers that were used in the initial number of carriers and will not be used in the subsequent number of carriers by placing zero magnitude signals on those carriers within the transmitter.

25. The method according to claim 23 wherein the step of changing in the transmitter the number of carriers in active use further includes the step of informing the transmitter of those carriers that were not used in the initial number of carriers and will be used in the subsequent number of carriers by placing data conveying signals into those carriers that previously had zero magnitude signals within the transmitter.

26. A method of communicating between a transmitter and a receiver in a wireless multicarrier system comprising the steps of:

selecting in the transmitter, from among a predetermined plurality of carriers and a predetermined plurality of symbol rates, a particular number of carriers and a particular symbol rate at which symbols are transmitted from the transmitter to the receiver based upon prior knowledge of at least one predetermined channel characteristic; and

transmitting a group of symbols using the selected number of carriers and the selected symbol rate.

27. The method according to claim 26 wherein the step of selecting chooses the particular symbol rate at which symbols are transmitted and the particular number of carriers used based upon the at least one predetermined channel characteristic of channel quality.

28. The method according to claim 26 wherein the step of selecting chooses the particular symbol rate at which symbols are transmitted and the particular number of carriers used based upon the at least one predetermined channel characteristic of channel traffic.

29. The method according to claim 26 wherein the step of selecting chooses the particular symbol rate at which symbols are transmitted and the particular number of carriers used based upon the at least one predetermined channel characteristic of regulatory power limits.

30. The method according to claim 26 wherein the step of selecting chooses the particular symbol rate at which symbols are transmitted and the particular number of carriers used based upon the at least one predetermined channel characteristic of interference that exists on the predetermined plurality of carriers.

31. The method according to claim 30 wherein the interference exists as a result of other transmissions from other transmitters.

32. The method according to claim 26 wherein the step of selecting chooses the particular symbol rate at which symbols are transmitted and the particular number of carriers used based upon the at least one predetermined channel characteristic of available frequency.

33. A method of communicating between first and second transceivers in a wireless multicarrier system comprising the steps of:

selecting in the first transceiver a particular number of carriers and a particular symbol rate at which symbols are transmitted from the first transceiver to the second transceiver from among a predetermined plurality of carriers and a predetermined plurality of symbol rates based upon prior knowledge of at least one predetermined channel characteristic obtained by analyzing a sounding signal; and

transmitting a group of symbols using the number of carriers, the initial carrier spacing, and the initial symbol rate.

34. The method according to claim 33 wherein the sounding signal analyzed in the step of selecting includes known data in a header portion.

35. The method according to claim 34 wherein the sounding signal analyzed in the step of selecting is a normal data transmission.

36. The method according to claim 33 wherein the step of selecting transmits the sounding signal from the first transceiver to the second transceiver.

37. The method according to claim 36 wherein the step of transmitting transmits the group of symbols from the first transceiver to the second transceiver.

38. The method according to claim 36 wherein the sounding signal analyzed in the step of selecting includes known data in a header portion.

39. The method according to claim 38 wherein the sounding signal analyzed in the step of selecting is a normal data transmission.

40. The method according to claim 33 wherein the step of selecting transmits the sounding signal from the second transceiver to the first transceiver.

41. The method according to claim 40 wherein the step of transmitting transmits the group of symbols from the first transceiver to the second transceiver.

42. The method according to claim 40 wherein the sounding signal analyzed in the step of selecting includes known data in a header portion.

43. The method according to claim 40 wherein the sounding signal analyzed in the step of selecting is a normal data transmission.

44. The method according to claim 33 wherein the step of setting analyzes the sounding signal to determine whether another transmitter is interfering with the transmitter.

45. The method according to claim 33 wherein the step of setting analyzes the sounding signal that spans a maximum bandwidth available between the transmitter and the receiver.

46. The method according to claim 33 wherein the step of setting analyzes the sounding signal that spans less than a maximum bandwidth available between the transmitter and the receiver.

47. The method according to claim 33 wherein the step of setting analyzes the sounding signal at one data rate and a plurality of other sounding signals, each at consecutively higher data rates, until communications fail.

48. The method according to claim 33 wherein the step of setting analyzes the sounding signal at one data rate and a plurality of other sounding signals, each at consecutively lower data rates, until communication is established.

49. The method according to claim 47 further including the step of storing information related to whether communications succeeded with respect to the sounding signal and the plurality of other sounding signals.

50. The method according to claim 48 further including the step of storing information related to whether communications succeeded with respect to the sounding signal and the plurality of other sounding signals.

51. A method of communicating between a transmitter and a receiver on a channel in a wireless multicarrier system comprising the steps of:

selecting in the transmitter a particular number of carriers and a particular symbol rate at which symbols are transmitted from the transmitter to the receiver from among a predetermined plurality of carriers and a predetermined plurality of symbol rates based upon interfering signals determined as being present in the channel by listening to the channel for a period of time, and

transmitting a group of symbols using the particular number of carriers and the particular symbol rate.

52. A method of communicating between at least a first transceiver and second transceiver in a wireless multicarrier system comprising the steps of:

selecting at least one of a particular number of carriers and a particular symbol rate at which symbols are transmitted from the first transceiver to the second transceiver from among a predetermined plurality of carriers and a predetermined plurality of symbol rates on a packet to packet basis, and

transmitting from the first transceiver to the second transceiver a group of symbols within each packet using the at least one of particular number of carriers and the particular symbol rate.

53. The method according to claim 52 wherein both the particular number of carriers and the particular symbol rate at which symbols are transmitted are selected during the step of selecting.

54. The method according to claim 52 wherein the particular number of carriers is selected during the step of selecting.

55. The method according to claim 52 wherein the particular symbol rate at which symbols are transmitted is selected during the step of selecting.

56. The method according to claim 52 wherein the step of selecting takes place within the first transceiver.

57. The method according to claim 56 wherein the wireless multicarrier system includes at least a third transceiver, and further including the steps of:

selecting at least one of a second particular number of carriers and a second particular symbol rate at which symbols are transmitted from the first transceiver to the third transceiver from among the predetermined plurality of carriers and the predetermined plurality of symbol rates on the packet to packet basis, and

transmitting from the first transceiver to the third transceiver another group of symbols within each packet using the at least one of second particular number of carriers and the second particular symbol rate.

58. The method according to claim 57 wherein both the second particular number of carriers and the second particular symbol rate at which symbols are transmitted are selected during the step of selecting.

59. The method according to claim 57 wherein the second particular number of carriers is selected during the step of selecting.

60. The method according to claim 57 wherein the second particular symbol rate at which symbols are transmitted is selected during the step of selecting.

61. The method according to claim 57 wherein the step of selecting at least one of the second particular number of carriers and the second particular symbol rate takes place within the first transceiver.

62. The method according to claim 52 wherein the wireless multicarrier system includes at least a third transceiver, and further including the steps of:

selecting at least one of a second particular number of carriers and a second particular symbol rate at which symbols are transmitted from the first transceiver to the third transceiver from among the predetermined plurality of carriers and the predetermined plurality of symbol rates on the packet to packet basis, and

transmitting from the first transceiver to the third transceiver another group of symbols within each packet using the at least one of second particular number of carriers and the second particular symbol rate.

63. The method according to claim 62 wherein both the second particular number of carriers and the second particular symbol rate at which symbols are transmitted are selected during the step of selecting.

64. The method according to claim 62 wherein the second particular number of carriers is selected during the step of selecting.

65. The method according to claim 62 wherein the second particular symbol rate at which symbols are transmitted is selected during the step of selecting.

66. The method according to claim 62 wherein the step of selecting at least one of the second particular number of carriers and the second particular symbol rate takes place within the first transceiver.

67. The method according to claim 52 wherein the step of transmitting transmits each packet with information contained in a header therein indicating the at least one of particular number of carriers and the particular symbol rate.

68. The method according to claim 52 wherein the step of transmitting transmits each packet with information contained in a header therein indicating both the particular number of carriers and the particular symbol rate.

69. The method according to claim 52 wherein the step of transmitting transmits each packet with information contained in a header therein indicating the particular number of carriers.

70. The method according to claim 52 wherein the step of transmitting transmits each packet with information contained in a header therein indicating the particular symbol rate.

71. The method according to claim 52 wherein the step of selecting takes into consideration at least one of a legacy number of carriers and legacy symbol rates which the second transceiver can receive when selecting the at least one of particular number of carriers and the particular symbol rate, such that only legacy carriers and legacy symbol rates are selected.

72. A method of communicating from a first transceiver in a wireless multicarrier system comprising the steps of:

selecting at least one of a particular number of carriers and a particular symbol rate at which symbols are transmitted from the first transceiver from among a predetermined plurality of carriers and a predetermined plurality of symbol rates;

transmitting from the first transceiver a group of symbols using the at least one of particular number of carriers and the particular symbol rate;

further selecting at least one of a second particular number of carriers and a second particular symbol rate at which symbols are transmitted from the first transceiver based upon at least one of a legacy number of carriers that are less than the predetermined plurality of carriers and legacy symbol rates that are less than the predetermined plurality of symbol rates; and

transmitting from the first transceiver the another group of symbols using the at least one of second particular number of carriers and the second particular symbol rate during the subsequent period of time.

73. The method according to claim 72 wherein:

both the particular number of carriers and the particular symbol rate at which symbols are transmitted are selected during the step of selecting; and

both the second particular number of carriers and the second particular symbol rate at which symbols are transmitted are selected during the step of further selecting.

74. The method according to claim 72 wherein:

the particular number of carriers is selected during the step of selecting; and

the second particular number of carriers is selected during the step of further selecting.

75. The method according to claim 72 wherein:

the particular symbol rate at which symbols are transmitted is selected during the step of selecting; and

the second particular symbol rate at which symbols are transmitted is selected during the step of further selecting.

76. A method of communicating from a first transceiver to a second transceiver in a wireless multicarrier system comprising the steps of:

selecting a particular number of carriers over which symbols can be transmitted from the first transceiver to the second transceiver from among a predetermined plurality of carriers, wherein the step of selecting includes the steps of:

determining a maximum number of carriers that channel conditions permit; and

determining that the maximum number of carriers is greater than a permitted number of carriers for the second transceiver; and

limiting the particular number of carriers to those carriers that are permitted, regardless of the determined maximum number of carriers that channel conditions permit; and

transmitting from the first transceiver to the second transceiver a group of symbols using the particular number of carriers.

77. The method according to claim 76 wherein the step of selecting also selects a particular symbol rate at which symbols are transmitted from the first transceiver to the second transceiver from among a predetermined plurality of symbol rates, wherein the step of selecting further includes the steps of

determining a maximum symbol rate that channel conditions permit; and

determining that the maximum symbol rate is greater than a permitted symbol rate for the second transceiver; and

limiting the particular symbol rate to one of the permitted symbol rates, regardless of the determining maximum symbol rate that channel conditions permit.

78. A method of communicating from a first transceiver to a second transceiver in a wireless multicarrier system comprising the steps of:

selecting a particular symbol rate at which symbols are transmitted from the first transceiver to the second

transceiver from among a predetermined plurality of symbol rates, wherein the step of selecting includes the steps of:

determining a maximum symbol rate that channel conditions permit; and

determining that the maximum symbol rate is greater than a permitted symbol rate for the second transceiver; and

limiting the particular symbol rate to one of the permitted symbol rates, regardless of the determining maximum symbol rate that channel conditions permit; and

transmitting from the first transceiver to the second transceiver a group of symbols using the particular symbol rate.

79. A method of communicating from a first transceiver in a wireless multicarrier system comprising the steps of:

transmitting from the first transceiver a group of symbols using a first particular number of carriers and a first particular symbol rate during a first period of time; and

transmitting from the first transceiver another group of symbols using a second particular number of carriers and a second particular symbol rate during a subsequent period of time, wherein at least one of the second particular number of carriers and the second particular symbol rate is different than the first particular number of carriers and the first particular symbol rate.

80. The method according to claim 79 wherein the second particular number of carriers and the second particular symbol rate are identified in a header portion of the group of symbols transmitted at the first particular number of carriers and the first particular symbol rate; and

further including the step configuring the first transceiver to transmit the another group of symbols using the second particular number of carriers and the second particular symbol rate identified in the header portion of the group of symbols transmitted at the first particular number of carriers and the first particular symbol rate.

81. The method according to claim 80 wherein:

both the second particular number of carriers and the second particular symbol rate are different than the first particular number of carriers and the first particular symbol rate.

82. The method according to claim 81 wherein the second particular number of carriers is greater than the first particular number of carriers and the second particular symbol rate is greater than the first particular symbol rate.

83. The method according to claim 79 wherein:

both the second particular number of carriers and the second particular symbol rate are different than the first particular number of carriers and the first particular symbol rate.

84. The method according to claim 83 wherein the second particular number of carriers is greater than the first particular number of carriers and the second particular symbol rate is greater than the first particular symbol rate.

85. The method according to claim 79 wherein the step of transmitting the group during the first period of time and transmitting the second group during the subsequent period of time are repeated in a cyclic manner.

* * * * *