US005530879A

United States Patent [19]

Crump et al.

[11] Patent Number: 5,530,879

[45] Date of Patent: Jun. 25, 1996

[54] **COMPUTER SYSTEM HAVING POWER MANAGEMENT PROCESSOR FOR SWITCHING POWER SUPPLY FROM ONE STATE TO ANOTHER RESPONSIVE TO A CLOSURE OF A SWITCH, A DETECTED RING OR AN EXPIRATION OF A TIMER**

[75] Inventors: **Dwayne T. Crump**; **Steven T. Pancoast**; **Paul H. Benson, IV**, all of Lexington, Ky.

[73] Assignee: **International Business Machines Corporation**, Armonk, N.Y.

[21] Appl. No.: **301,466**

[22] Filed: **Sep. 7, 1994**

[51] **Int. Cl.**[6] **G06F 1/26**; G06F 1/32

[52] **U.S. Cl.** **395/750**; 379/98; 364/222.2; 364/222.3; 364/273.1; 364/273.2; 364/273.3; 364/273.5; 364/DIG. 1; 364/707

[58] **Field of Search** 395/750, 550; 364/707, 492; 377/16; 365/229, 227; 307/66, 64; 371/9.1; 379/93, 98

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,443,865	4/1984	Schultz et al.	395/425
4,851,987	7/1989	Day	395/550
4,907,150	3/1990	Arroyo et al.	395/575
5,167,024	11/1992	Smith et al.	395/375
5,175,845	12/1992	Little	395/550
5,239,652	8/1993	Seibert et al.	395/750
5,241,680	8/1993	Cole et al.	395/750
5,247,655	9/1993	Khan et al.	395/550
5,249,298	9/1993	Bolan et al.	395/750
5,410,713	4/1995	White et al.	395/750
5,428,252	6/1995	Walker et al.	307/64

OTHER PUBLICATIONS

80C51–Based 8–Bit Microcontrollers, Philips Semiconductors, Suite 300, 3300 Drake Circle, Raleigh, NC 27607–3362, Mar. 1993, pp. 41–42.

English language translation of abstract of Japanese document J59077531, May 5, 1984.

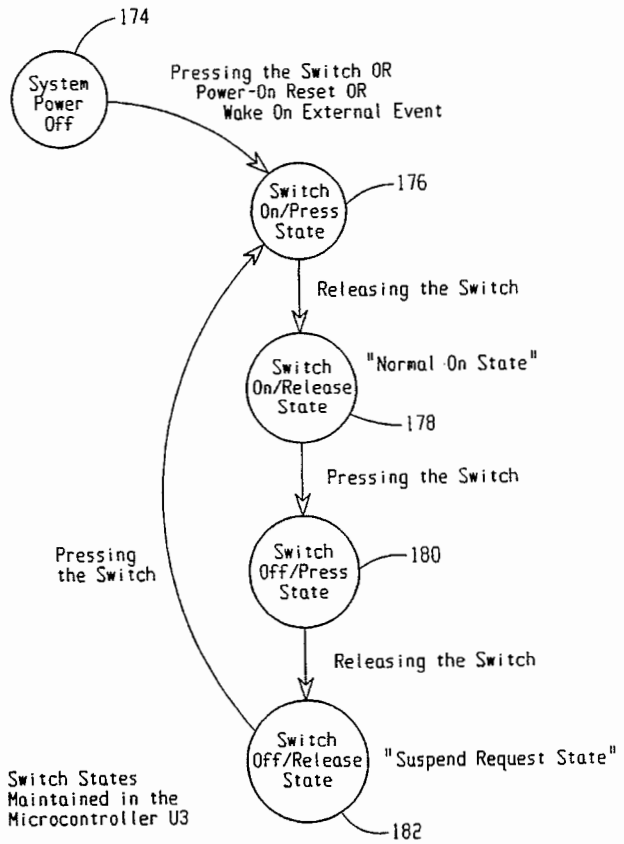
Primary Examiner—Gopal C. Ray

Attorney, Agent, or Firm—Anthony N. Magistrale; Galfee, Halter & Griswold

[57] **ABSTRACT**

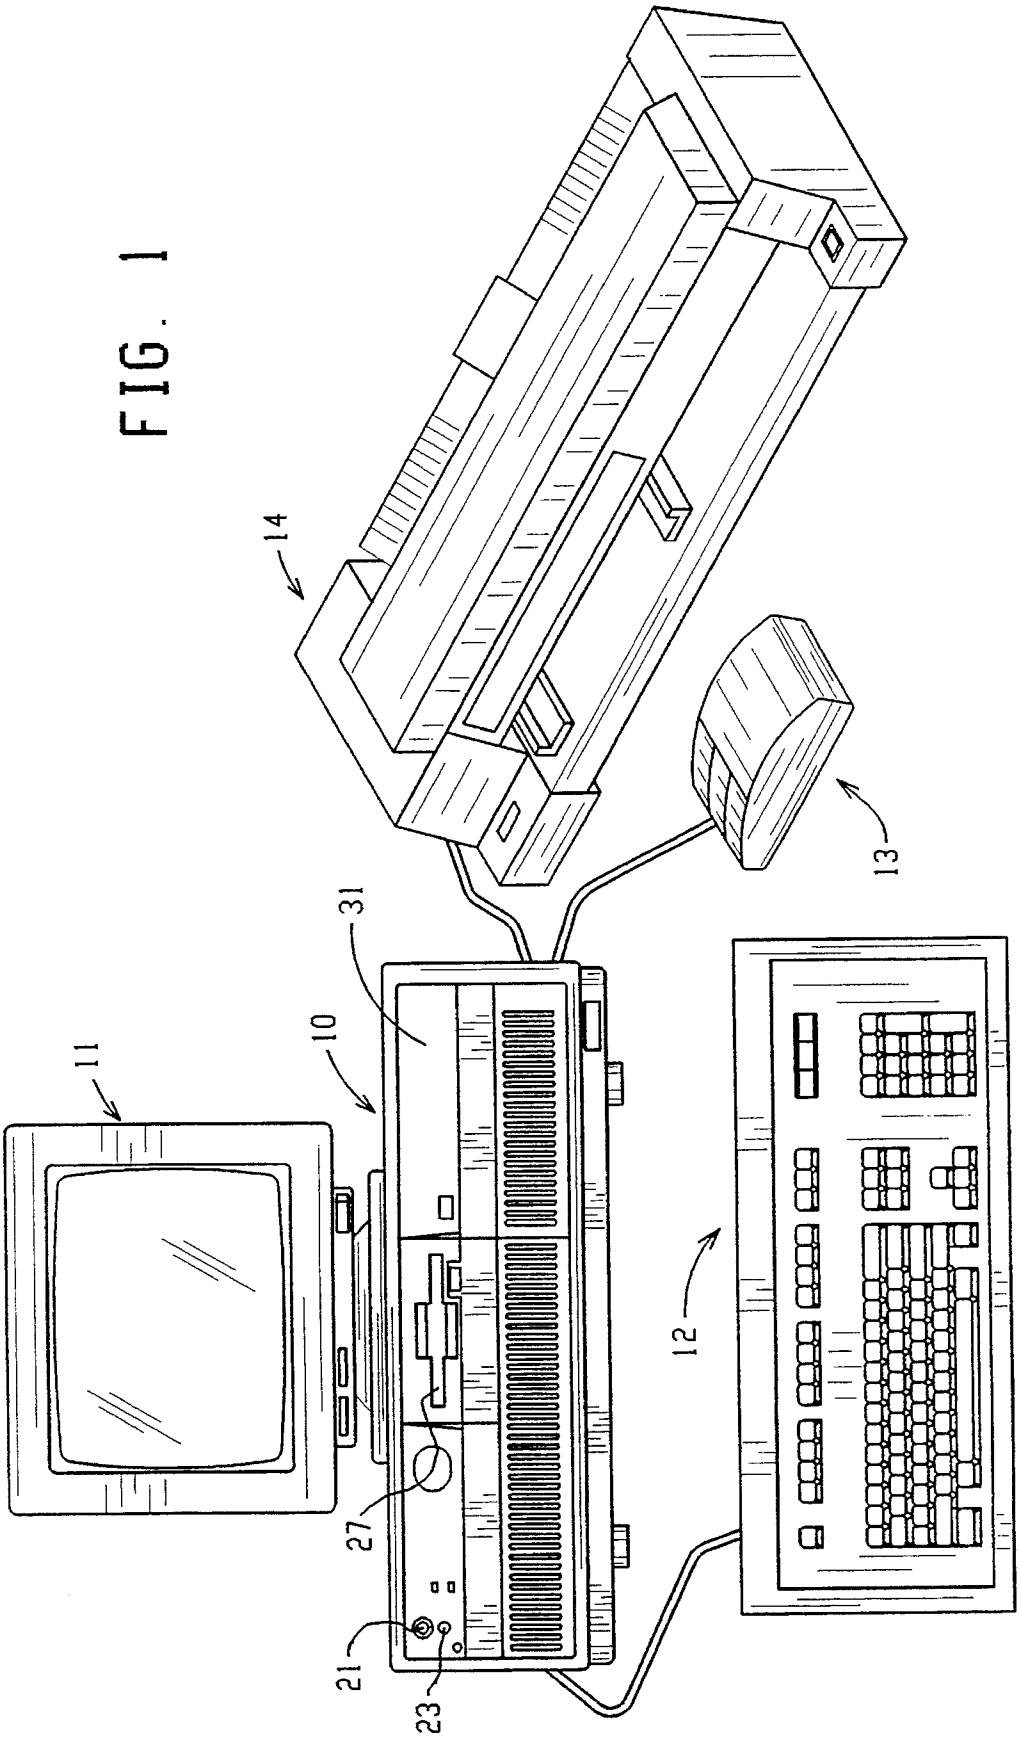
A computer system having a CPU, a power management processor, a switch, a modem, a timer, an override circuit, a glitch circuit, and a power supply in circuit communication. The power supply has several power supply states, which are controlled by the power management processor responsive to the CPU, the switch, the modem, the timer, the glitch circuit, the override circuit, and the power management processor itself.

11 Claims, 52 Drawing Sheets



Qualcomm Ex. 1008 - 1/84

FIG. 1



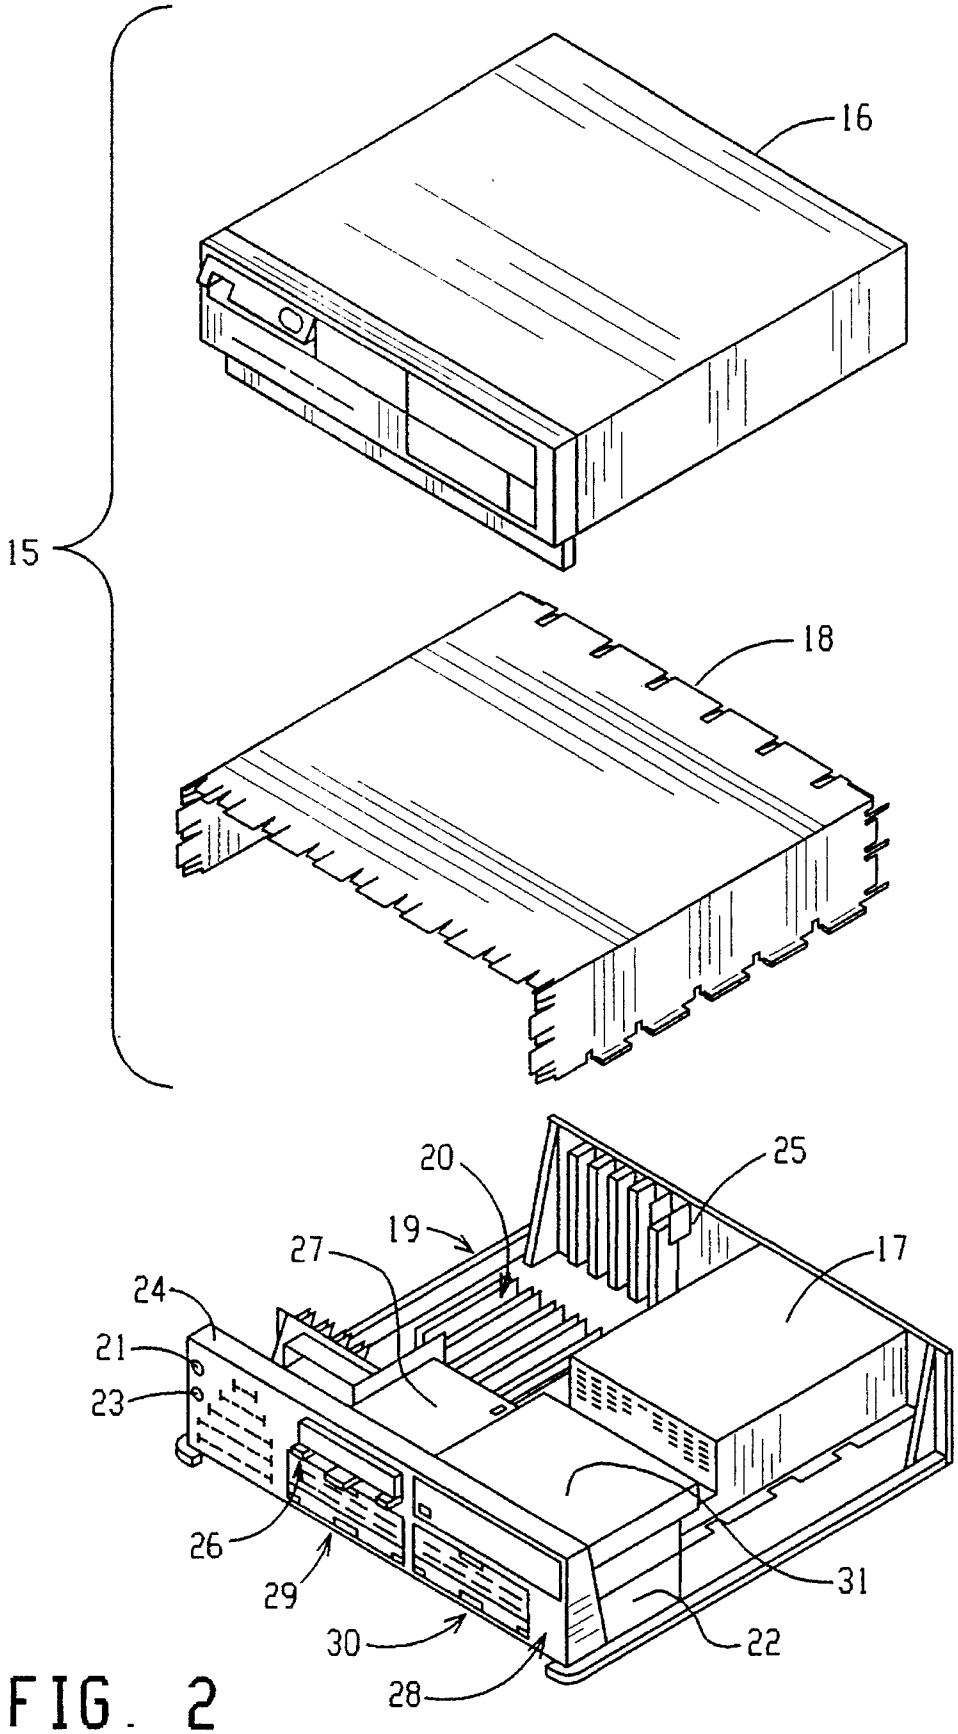


FIG. 2

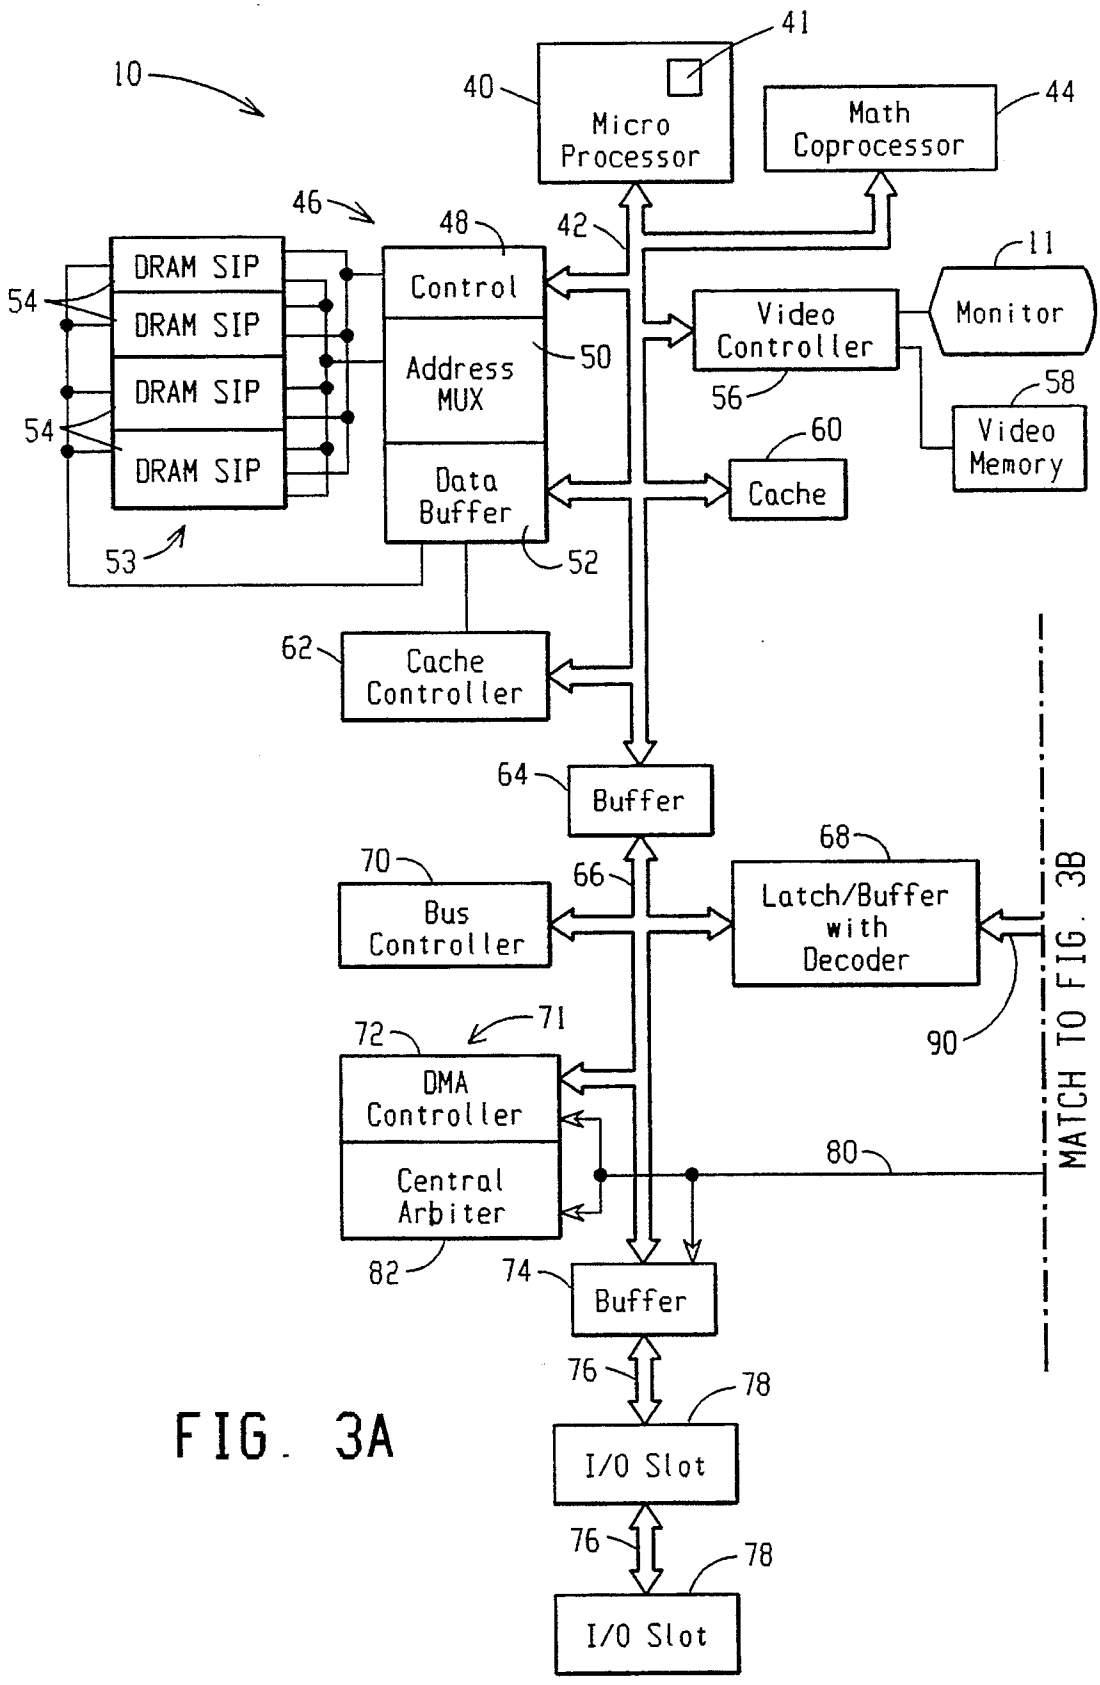

10
41
40
Micro Processor
Math Coprocessor
44
46
48
42
11
DRAM SIP
DRAM SIP
DRAM SIP
DRAM SIP
54
54
Control
Address MUX
Data Buffer
50
52
Video Controller
Monitor
56
58
Video Memory
60
Cache
53
62
Cache Controller
64
Buffer
68
70
66
Bus Controller
Latch/Buffer with Decoder
90
72
71
DMA Controller
Central Arbiter
80
82
74
Buffer
76
78
I/O Slot
76
78
I/O Slot
MATCH TO FIG. 3B

FIG. 3A

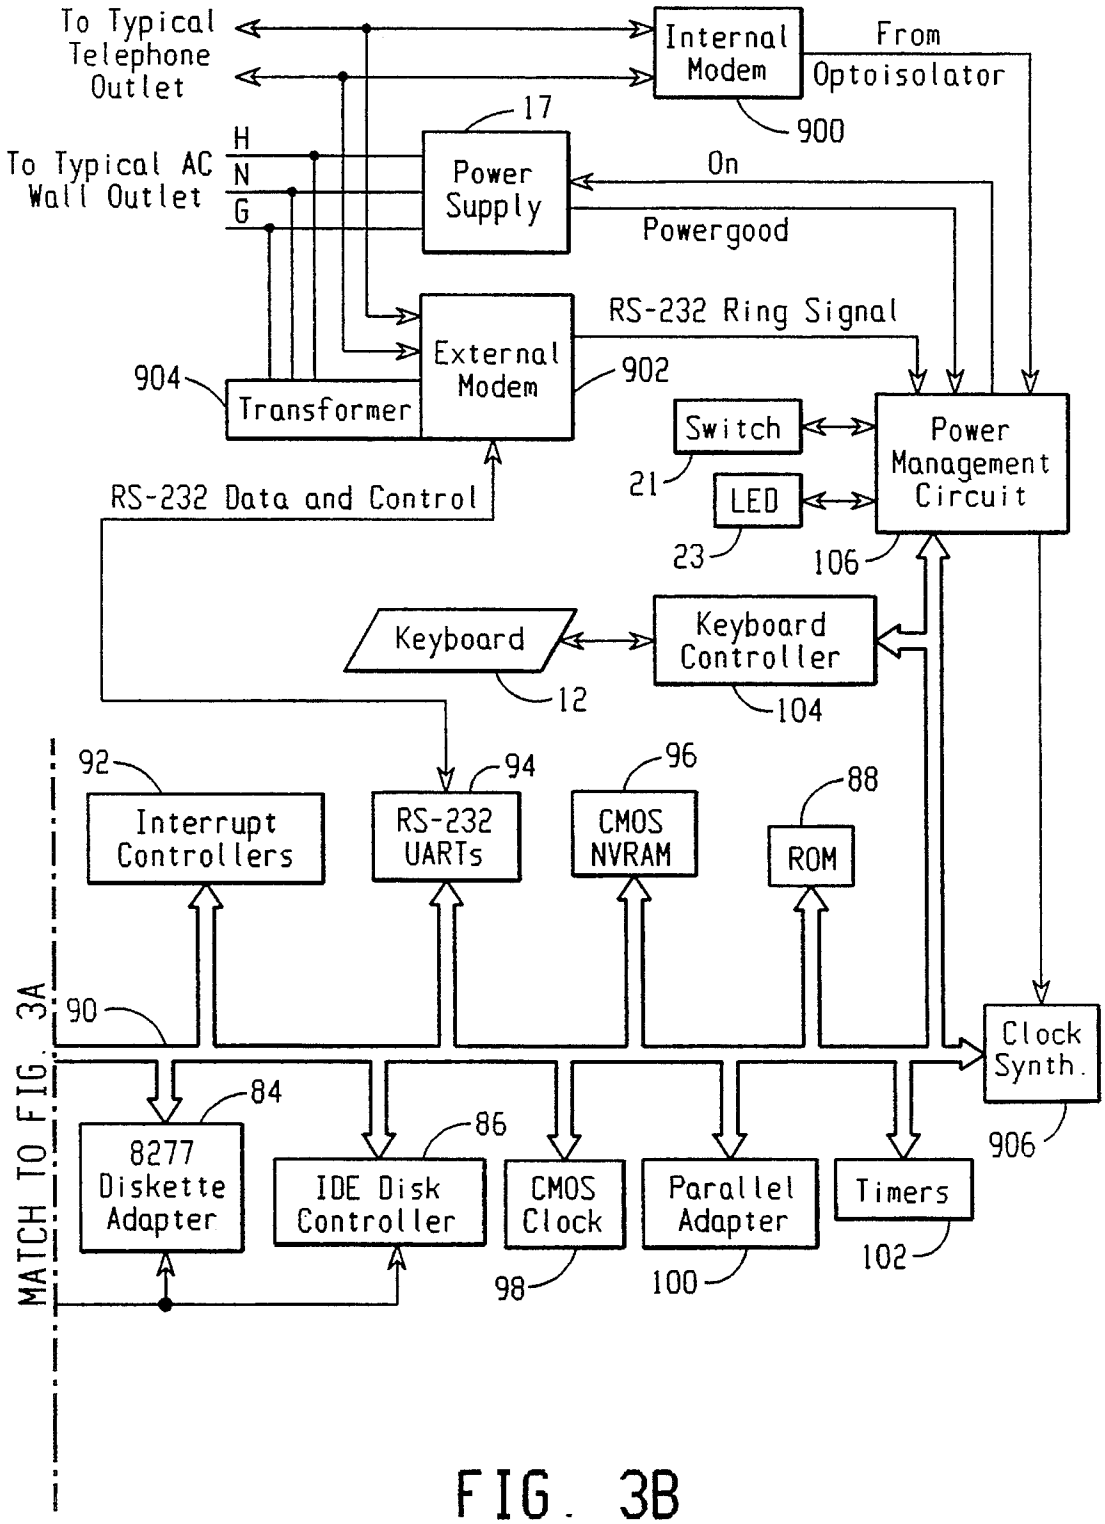
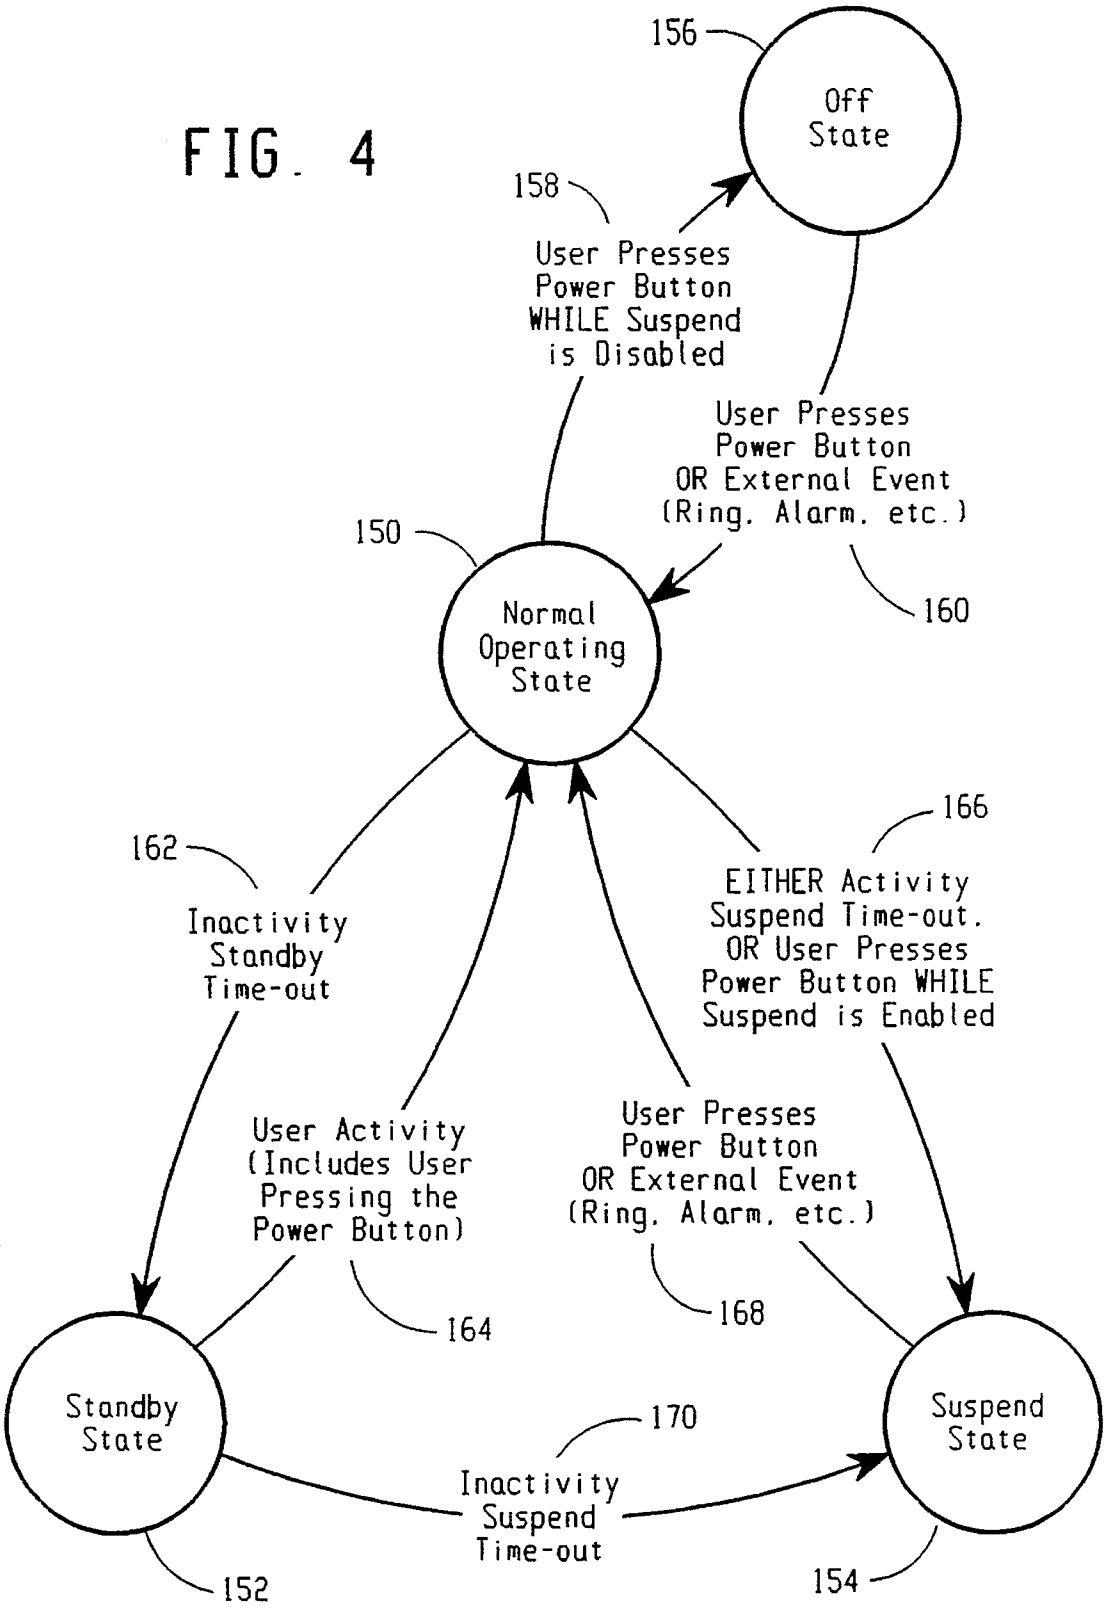

To Typical Telephone Outlet
Internal Modem
From Optoisolator
900
17
To Typical AC Wall Outlet
H
N
G
Power Supply
On
Powergood
RS-232 Ring Signal
External Modem
902
904
Transformer
Switch
21
LED
23
Power Management Circuit
106
RS-232 Data and Control
Keyboard
12
Keyboard Controller
104
92
Interrupt Controllers
94
RS-232 UARTs
96
CMOS NVRAM
88
ROM
90
Clock Synth.
906
MATCH TO FIG. 3A
84
8277 Diskette Adapter
86
IDE Disk Controller
CMOS Clock
98
Parallel Adapter
100
Timers
102

FIG. 3B

FIG. 4


156
Off State
158
User Presses Power Button WHILE Suspend is Disabled
User Presses Power Button OR External Event (Ring, Alarm, etc.)
150
160
Normal Operating State
162
Inactivity Standby Time-out
166
EITHER Activity Suspend Time-out, OR User Presses Power Button WHILE Suspend is Enabled
User Activity (Includes User Pressing the Power Button)
User Presses Power Button OR External Event (Ring, Alarm, etc.)
164
168
Standby State
170
Inactivity Suspend Time-out
Suspend State
152
154

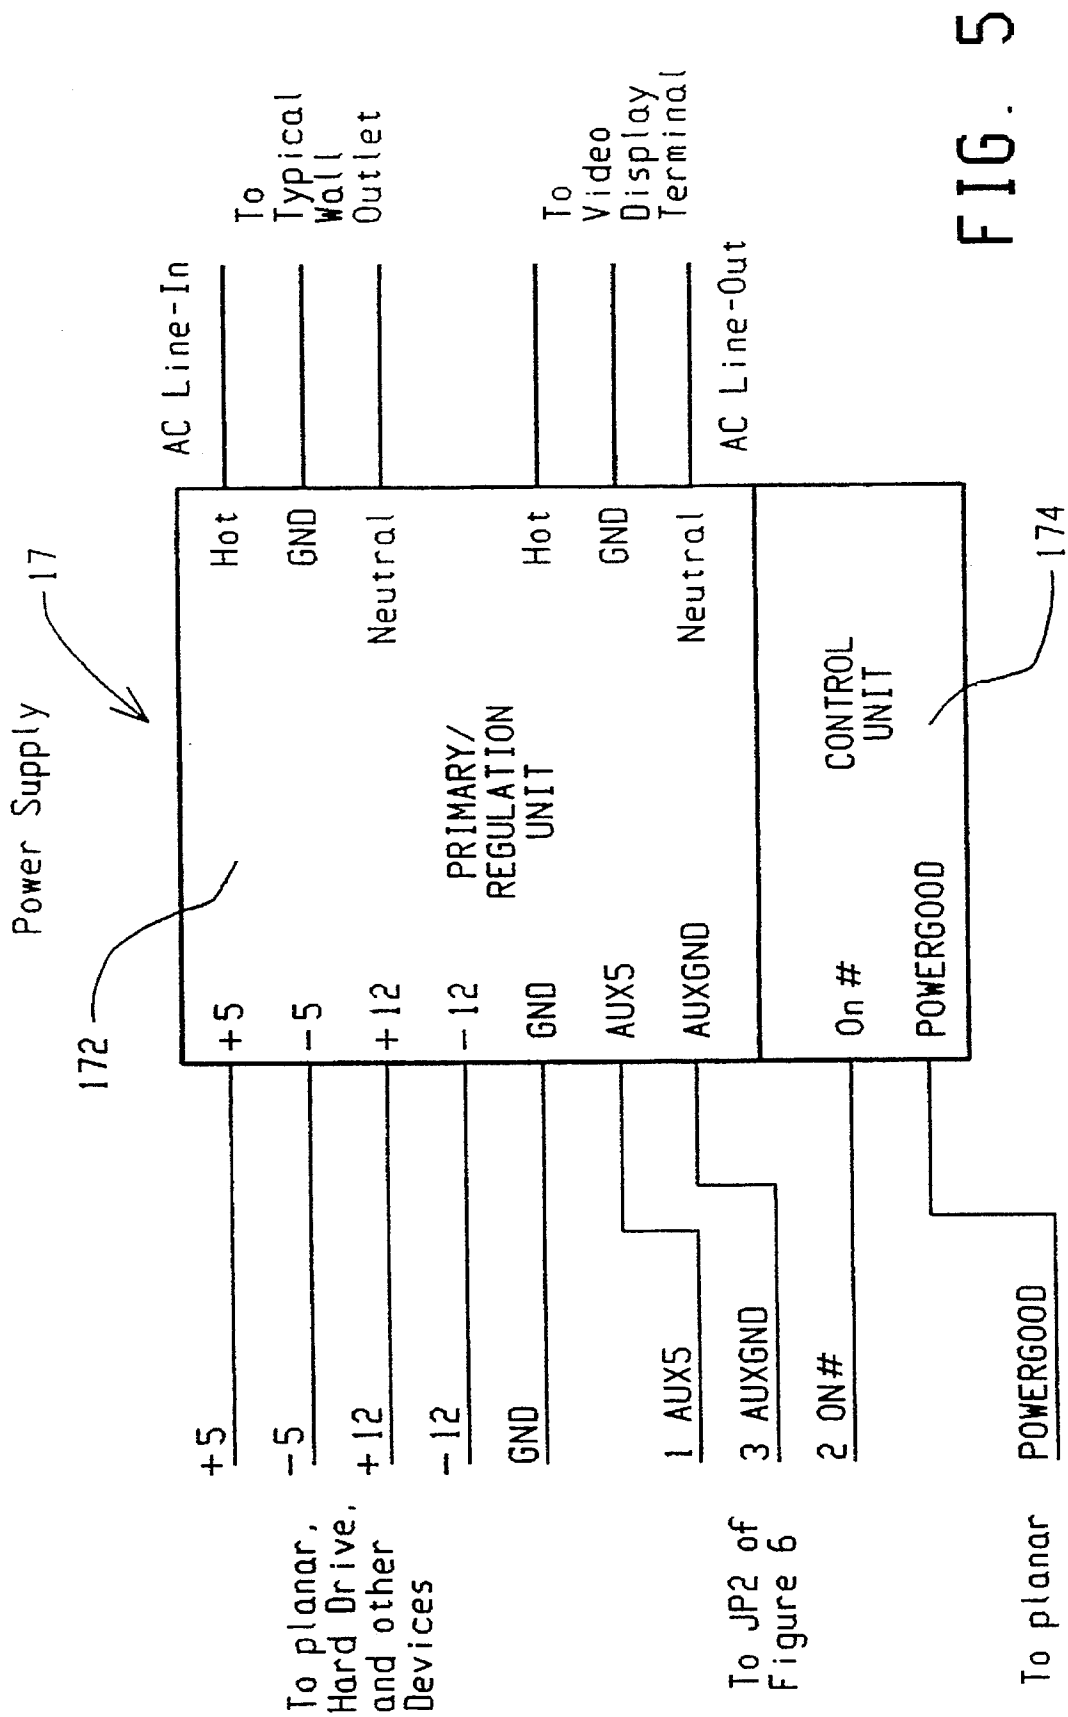
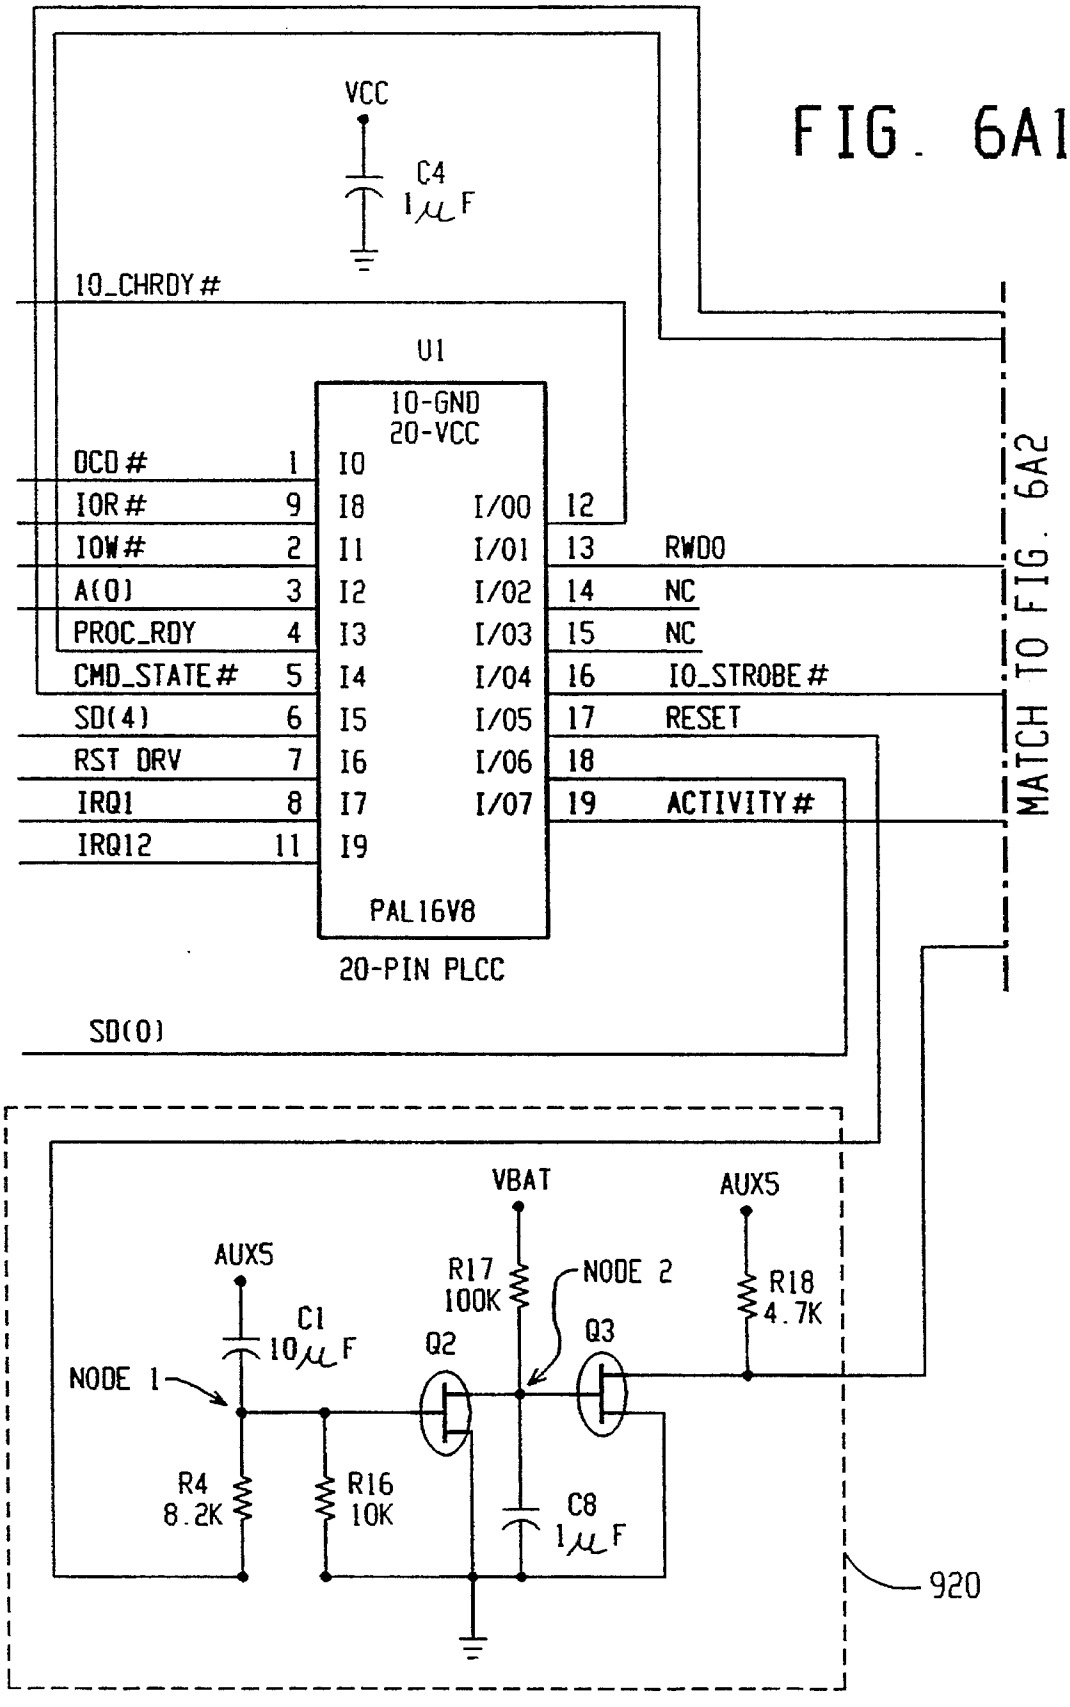

AC Line-In
To Typical Wall Outlet
To Video Display Terminal
AC Line-Out
Hot
GND
Neutral
Hot
GND
Neutral
Power Supply
17
PRIMARY/ REGULATION UNIT
CONTROL UNIT
174
172
+5
-5
+12
-12
GND
AUX5
AUXGND
On #
POWERGOOD
+5
-5
+12
-12
GND
1 AUX5
3 AUXGND
2 ON#
POWERGOOD
To planar, Hard Drive, and other Devices
To JP2 of Figure 6
To planar

FIG. 5

FIG. 6A1


VCC
C4
1μF
IO_CHRDY#
U1
10-GND
20-VCC
OCD# 1 I0
IOR# 9 I8 I/00 12
IOW# 2 I1 I/01 13 RWDO
A(0) 3 I2 I/02 14 NC
PROC_RDY 4 I3 I/03 15 NC
CMD_STATE# 5 I4 I/04 16 IO_STROBE#
SD(4) 6 I5 I/05 17 RESET
RST DRV 7 I6 I/06 18
IRQ1 8 I7 I/07 19 ACTIVITY#
IRQ12 11 I9
PAL16V8
20-PIN PLCC
SD(0)
MATCH TO FIG. 6A2
VBAT
AUX5
AUX5
R17
100K
NODE 2
R18
4.7K
C1
10μF
Q2
Q3
NODE 1
R4
8.2K
R16
10K
C8
1μF
920

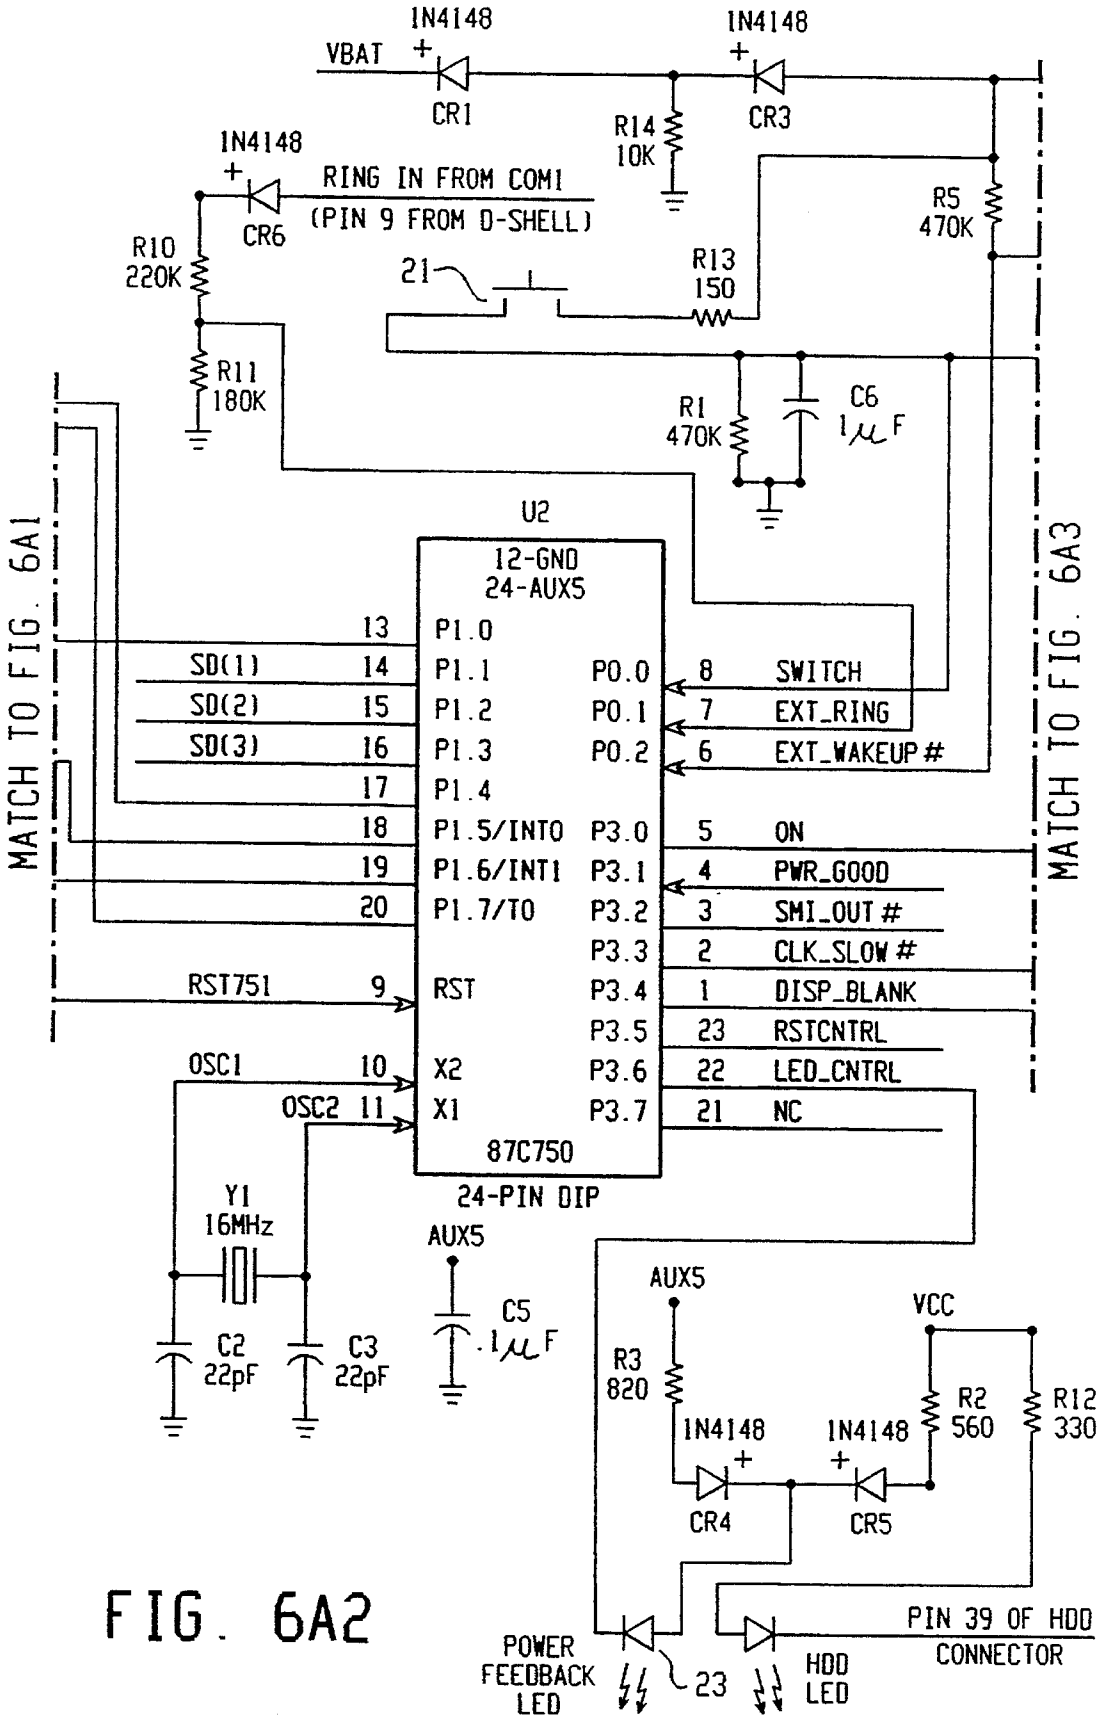

IN4148
VBAT
CR1
IN4148
CR3
R14
10K
IN4148
CR6
RING IN FROM COM1
(PIN 9 FROM D-SHELL)
R10
220K
R11
180K
21
R13
150
R5
470K
R1
470K
C6
1μF
MATCH TO FIG. 6A1
MATCH TO FIG. 6A3
U2
12-GND
24-AUX5
13 P1.0
SD(1) 14 P1.1
SD(2) 15 P1.2
SD(3) 16 P1.3
17 P1.4
18 P1.5/INT0
19 P1.6/INT1
20 P1.7/T0
RST751 9 RST
10 X2
OSC2 11 X1
87C750
24-PIN DIP
P0.0 8 SWITCH
P0.1 7 EXT_RING
P0.2 6 EXT_WAKEUP#
P3.0 5 ON
P3.1 4 PWR_GOOD
P3.2 3 SMI_OUT#
P3.3 2 CLK_SLOW#
P3.4 1 DISP_BLANK
P3.5 23 RSTCNTRL
P3.6 22 LED_CNTRL
P3.7 21 NC
OSC1
Y1
16MHz
C2
22pF
C3
22pF
AUX5
C5
.1μF
AUX5
R3
820
IN4148
CR4
IN4148
CR5
VCC
R2
560
R12
330
POWER
FEEDBACK
LED
23
HDD
LED
PIN 39 OF HDD
CONNECTOR

FIG. 6A2

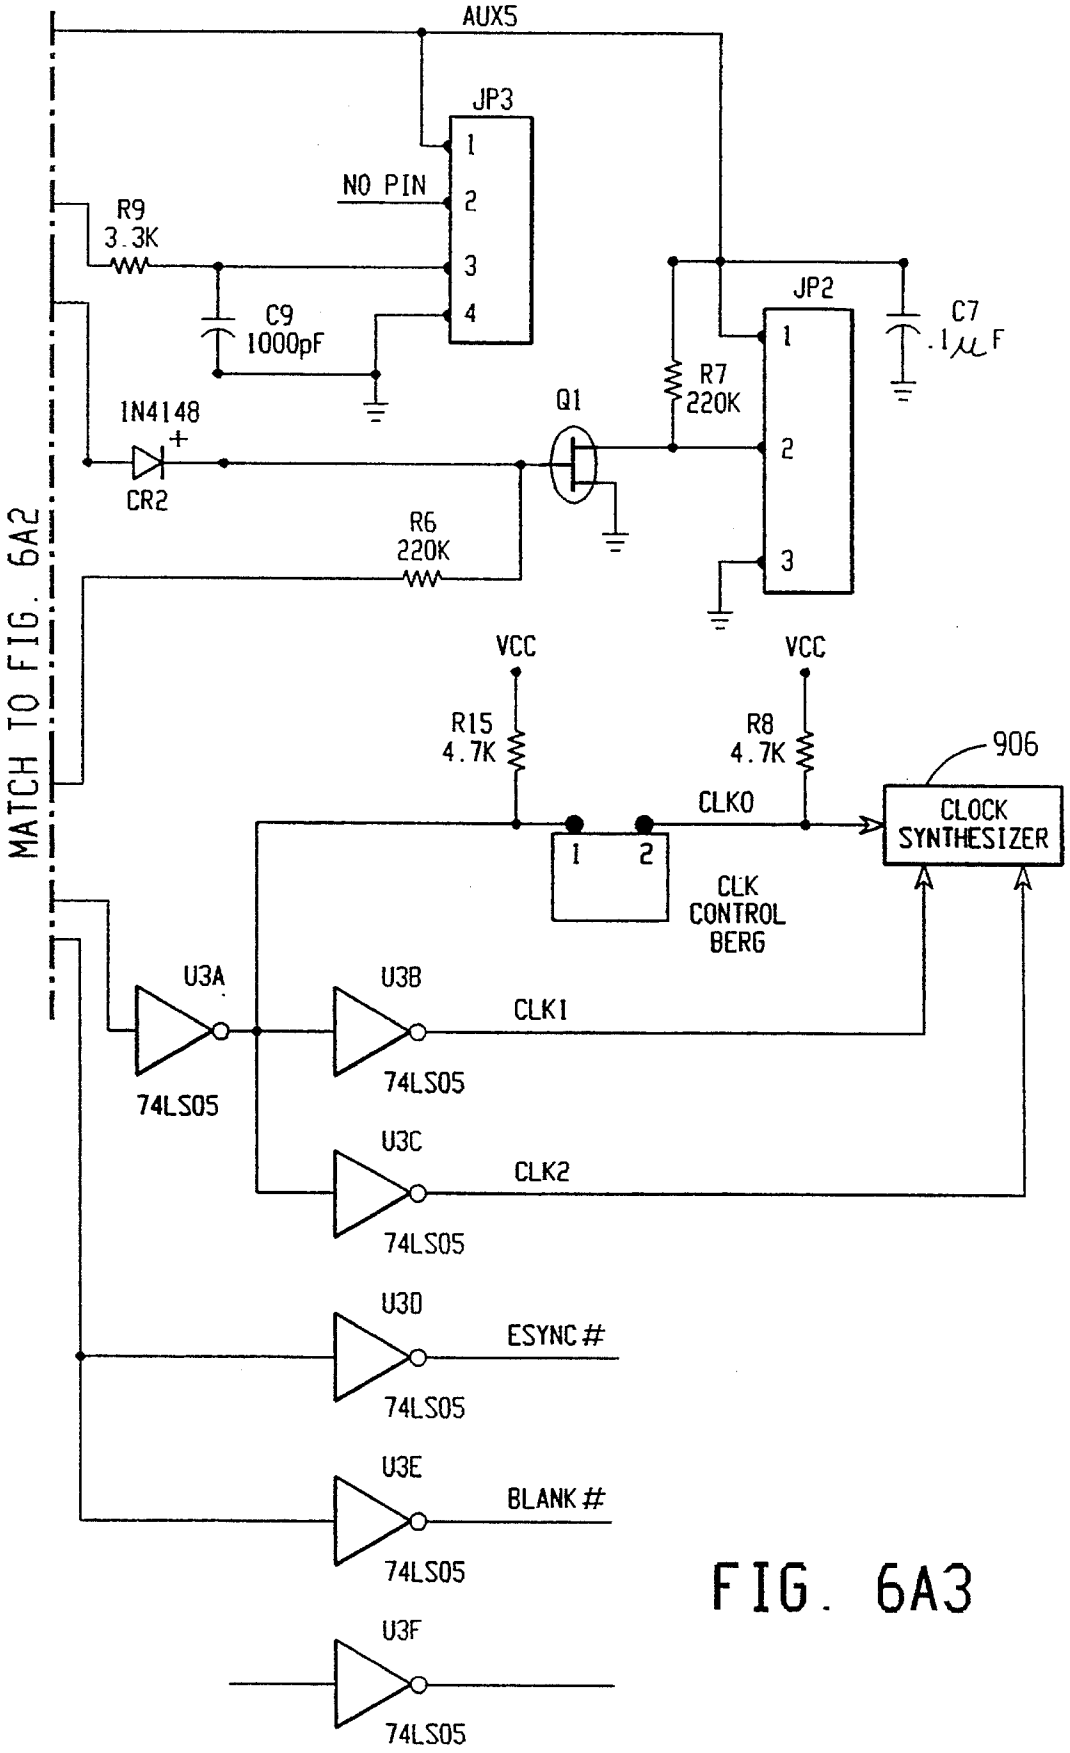
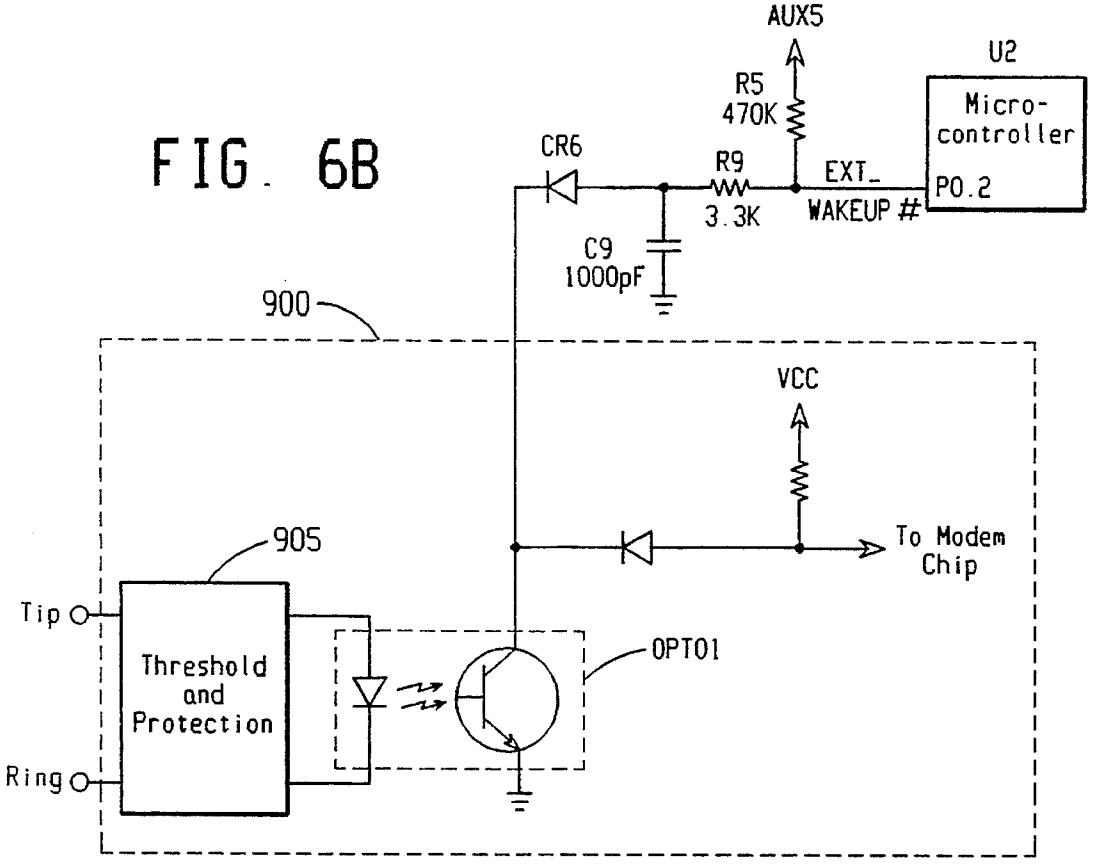

AUX5
JP3
1
NO PIN
2
R9
3.3K
3
C9
1000pF
4
JP2
C7
.1μF
R7
220K
1
IN4148
Q1
2
CR2
R6
220K
3
MATCH TO FIG. 6A2
VCC
VCC
R15
4.7K
R8
4.7K
906
CLKO
CLOCK
SYNTHESIZER
1
2
CLK
CONTROL
BERG
U3A
U3B
CLK1
74LS05
74LS05
U3C
CLK2
74LS05
U3D
ESYNC#
74LS05
U3E
BLANK#
74LS05
U3F
74LS05

FIG. 6A3

FIG. 6B


AUX5
U2
R5
470K
Micro-
controller
CR6
R9
3.3K
EXT_
WAKEUP #
P0.2
C9
1000pF
900
VCC
905
To Modem
Chip
Tip
Threshold
and
Protection
OPTO1
Ring

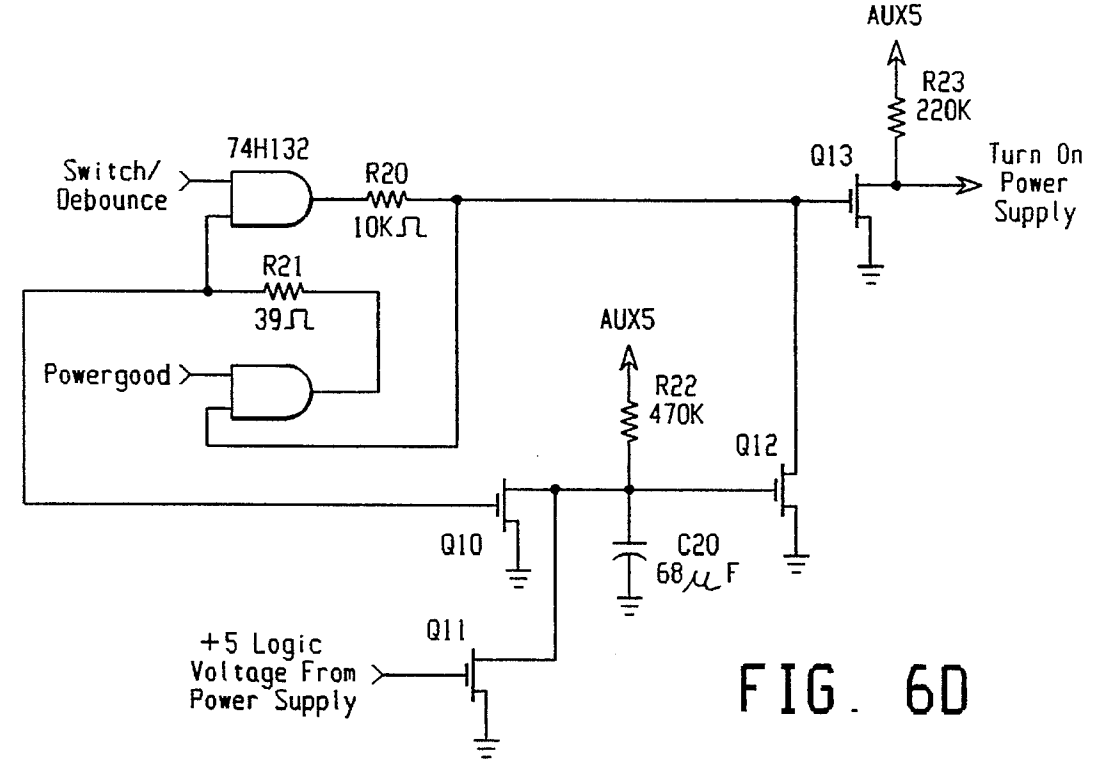

AUX5
R23
220K
74H132
Q13
Switch/
Debounce
R20
10K
Turn On
Power
Supply
R21
39
AUX5
Powergood
R22
470K
Q12
Q10
C20
68μF
Q11
+5 Logic
Voltage From
Power Supply

FIG. 6D

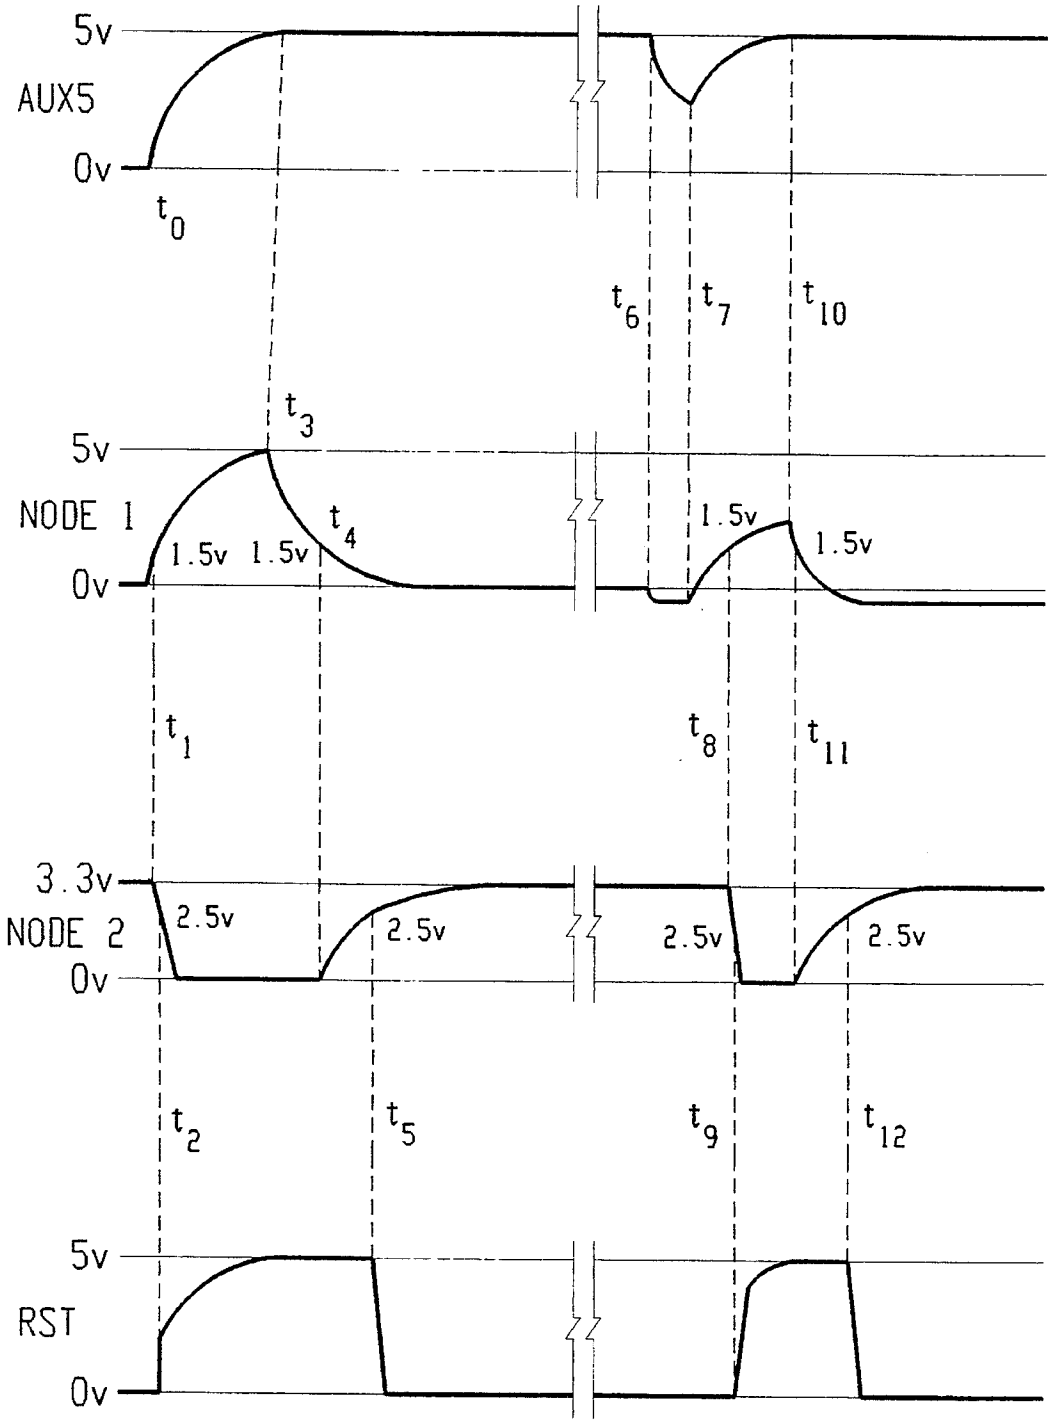

5v
AUX5
0v
t0
t6
t7
t10
t3
5v
NODE 1
1.5v
1.5v
t4
1.5v
1.5v
0v
t1
t8
t11
3.3v
NODE 2
2.5v
2.5v
2.5v
2.5v
0v
t2
t5
t9
t12
5v
RST
0v

FIG. 6C

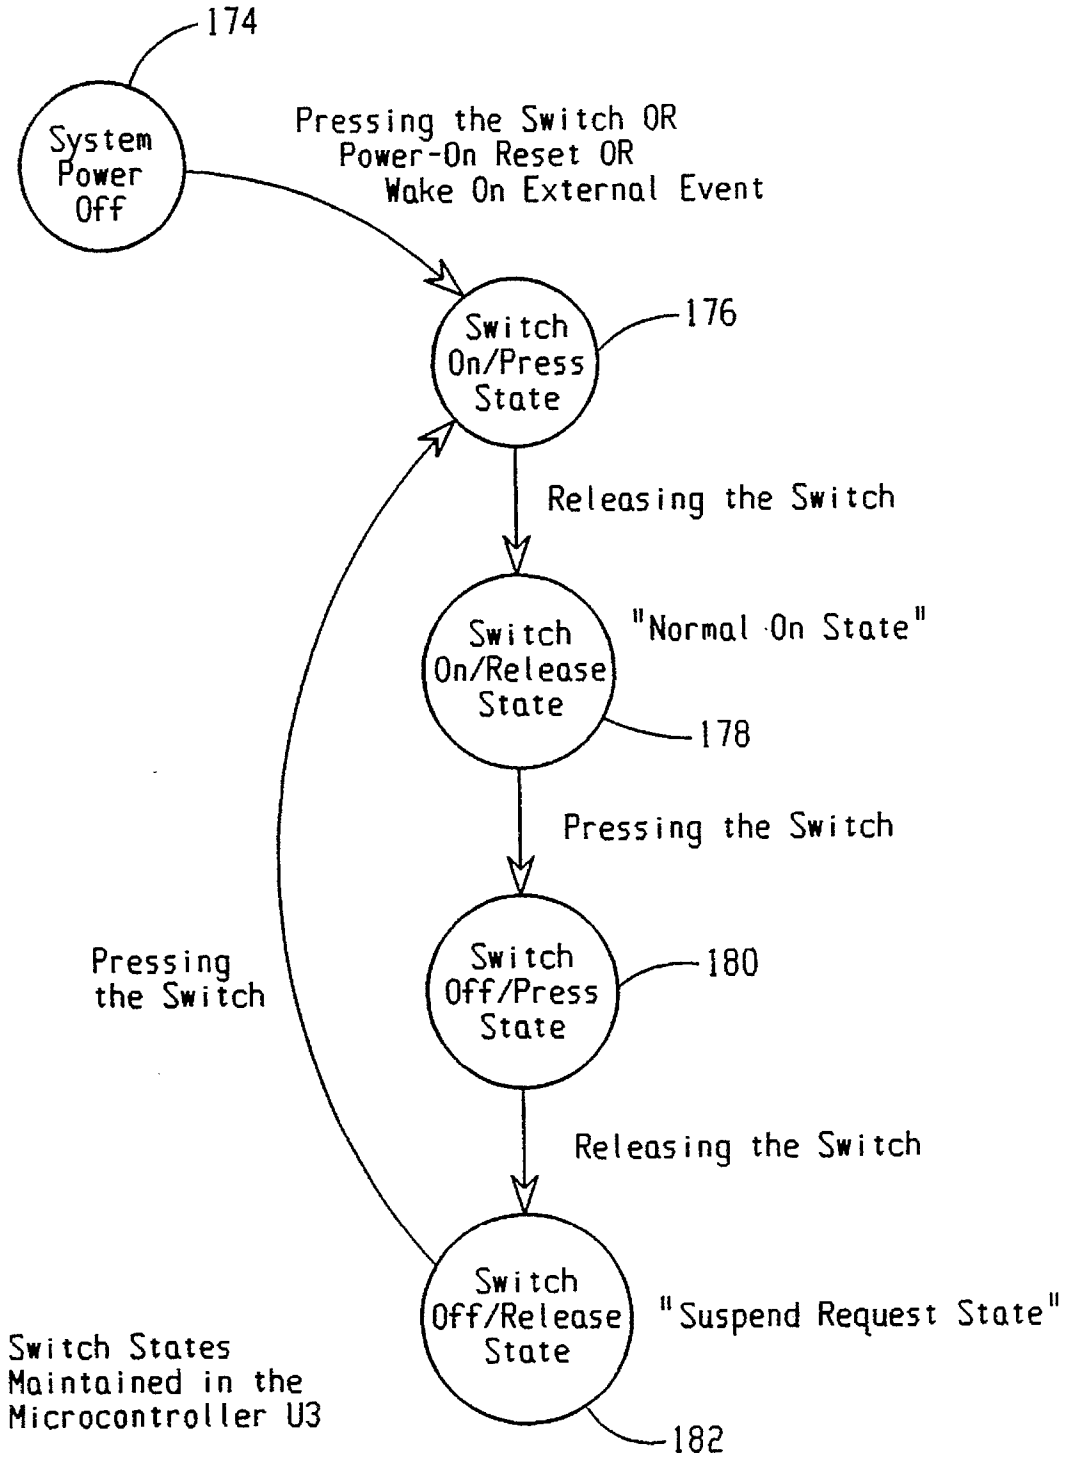

174
System Power Off
Pressing the Switch OR
Power-On Reset OR
Wake On External Event
Switch On/Press State
176
Releasing the Switch
Switch On/Release State
"Normal On State"
178
Pressing the Switch
Switch Off/Press State
180
Pressing the Switch
Releasing the Switch
Switch Off/Release State
"Suspend Request State"
182
Switch States Maintained in the Microcontroller U3

FIG. 7

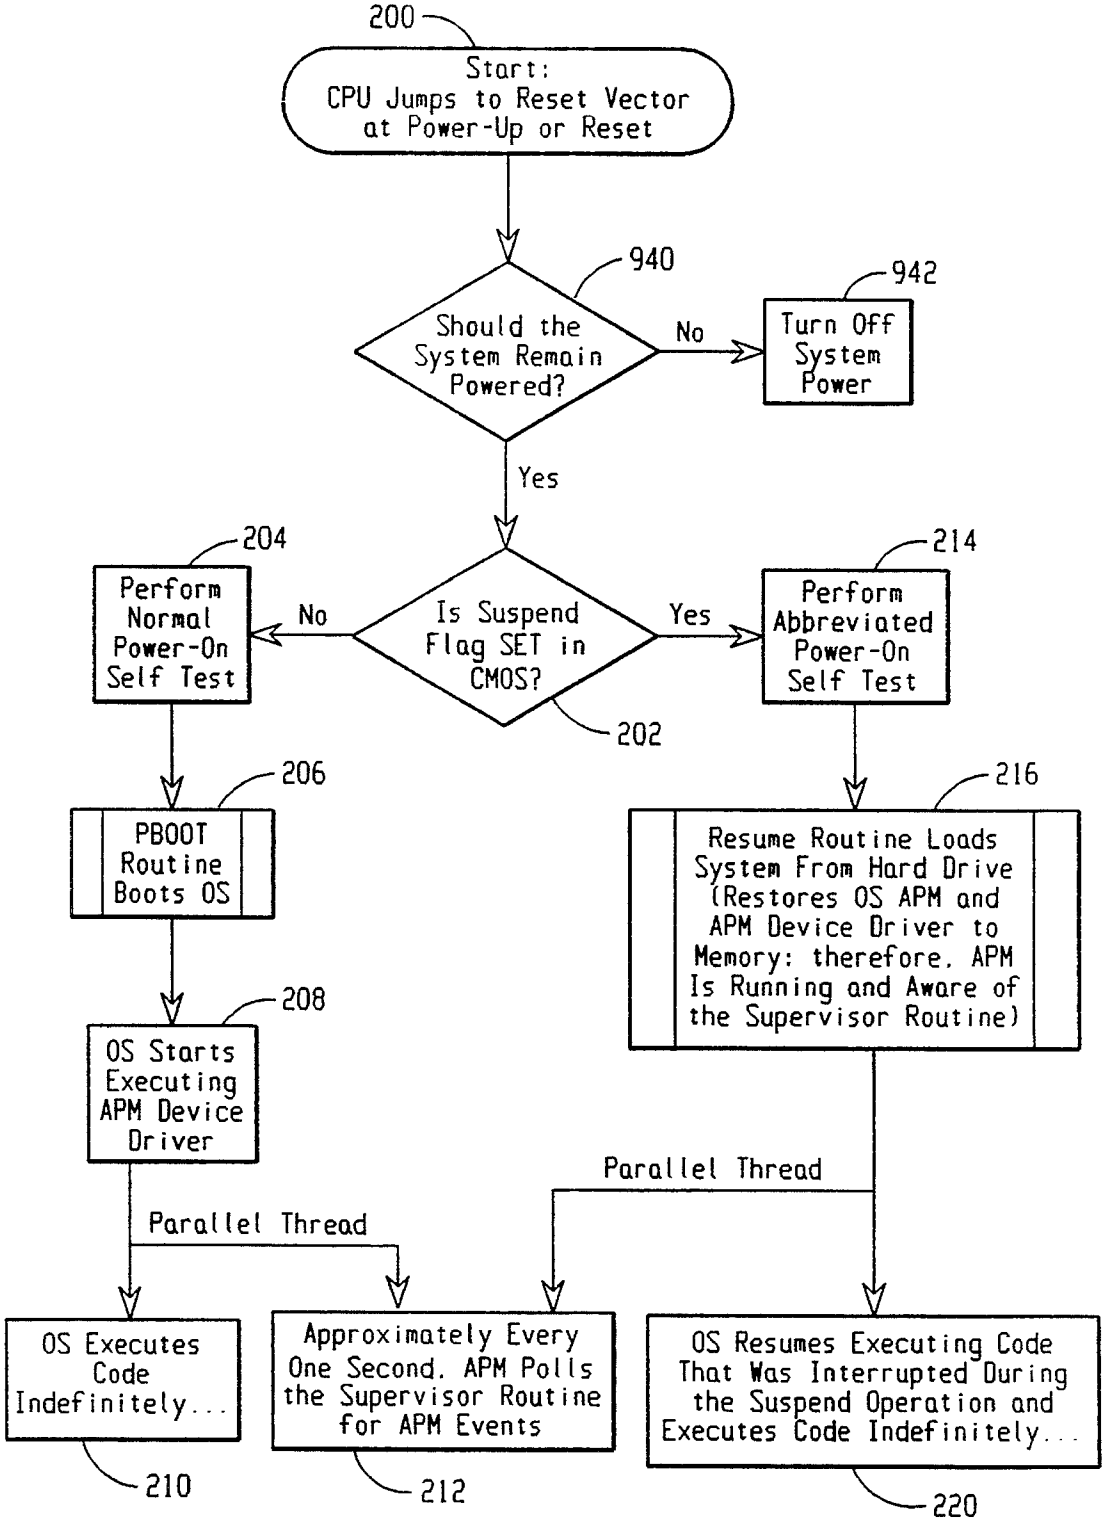

200
Start:
CPU Jumps to Reset Vector
at Power-Up or Reset
940
Should the
System Remain
Powered?
No
942
Turn Off
System
Power
Yes
204
Perform
Normal
Power-On
Self Test
No
Is Suspend
Flag SET in
CMOS?
Yes
214
Perform
Abbreviated
Power-On
Self Test
202
206
PBOOT
Routine
Boots OS
216
Resume Routine Loads
System From Hard Drive
(Restores OS APM and
APM Device Driver to
Memory: therefore, APM
Is Running and Aware of
the Supervisor Routine)
208
OS Starts
Executing
APM Device
Driver
Parallel Thread
Parallel Thread
OS Executes
Code
Indefinitely...
Approximately Every
One Second, APM Polls
the Supervisor Routine
for APM Events
OS Resumes Executing Code
That Was Interrupted During
the Suspend Operation and
Executes Code Indefinitely...
210
212
220

FIG. 8

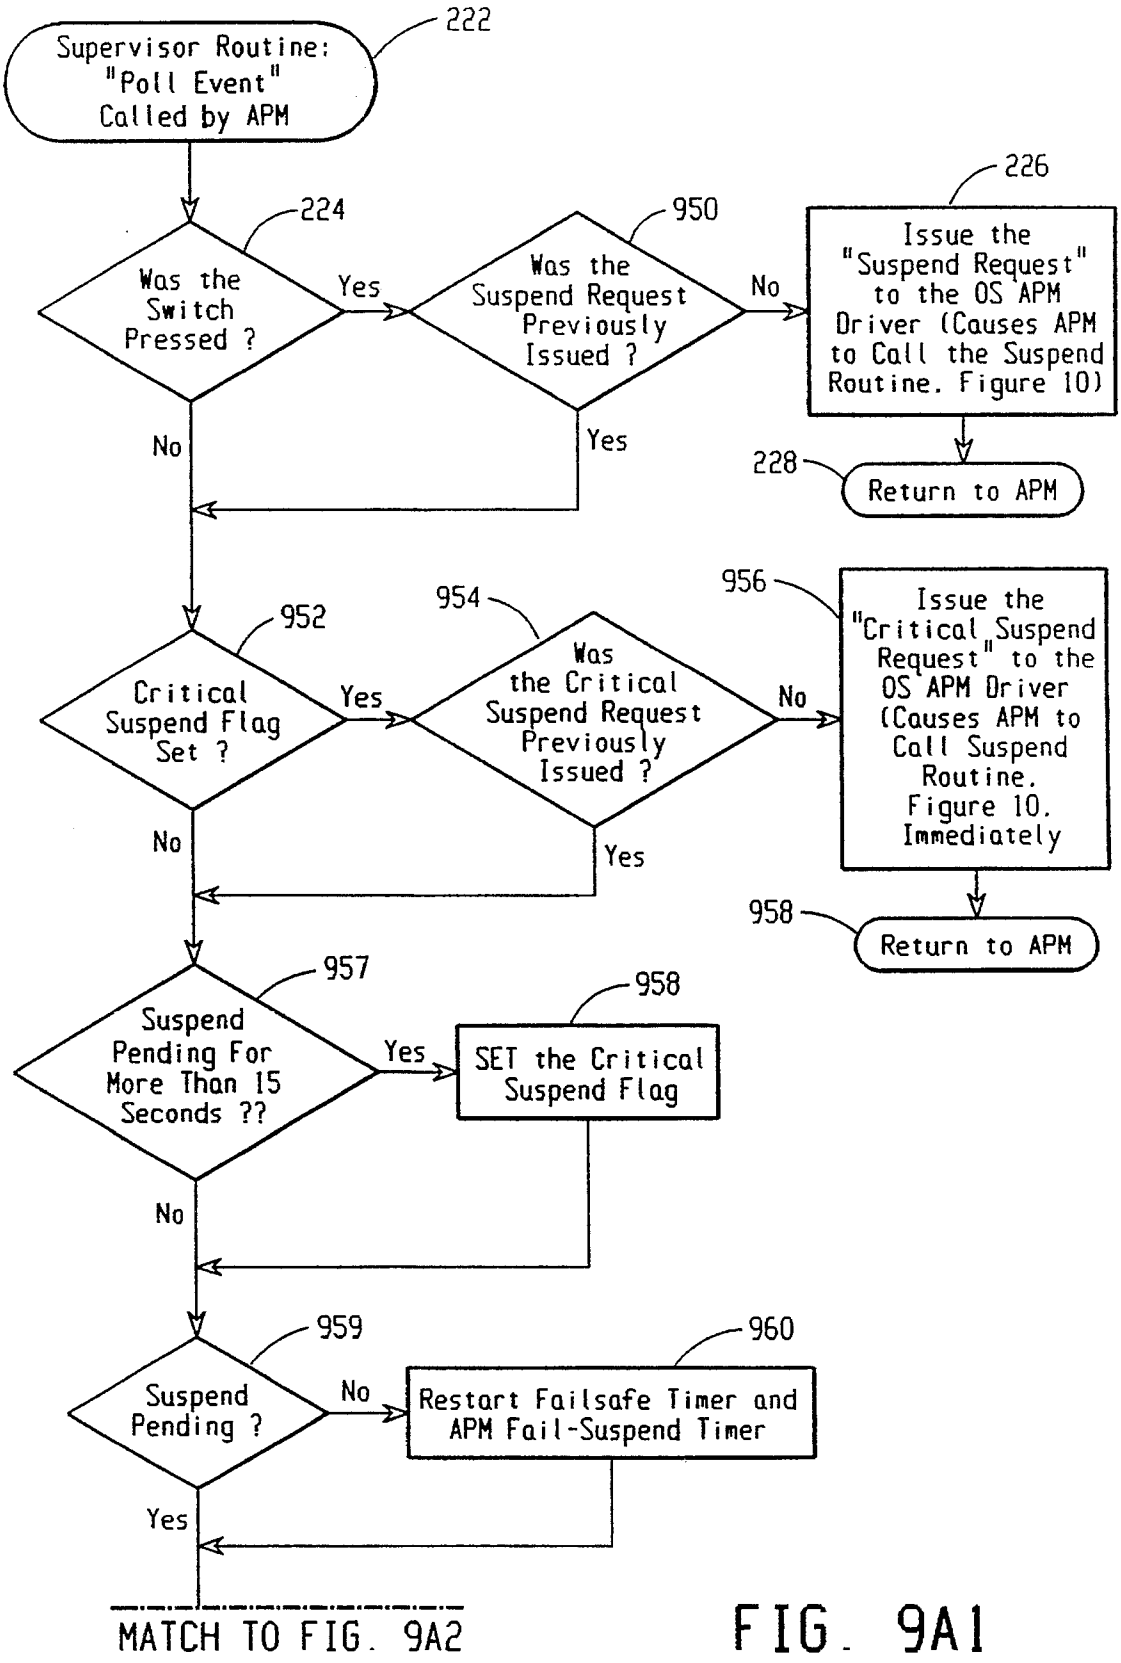

222
Supervisor Routine: "Poll Event" Called by APM
224
Was the Switch Pressed ?
Yes
950
Was the Suspend Request Previously Issued ?
No
226
Issue the "Suspend Request" to the OS APM Driver (Causes APM to Call the Suspend Routine. Figure 10)
228
Return to APM
No
Yes
952
Critical Suspend Flag Set ?
Yes
954
Was the Critical Suspend Request Previously Issued ?
No
956
Issue the "Critical Suspend Request" to the OS APM Driver (Causes APM to Call Suspend Routine. Figure 10. Immediately
958
Return to APM
No
Yes
957
Suspend Pending For More Than 15 Seconds ??
Yes
958
SET the Critical Suspend Flag
No
959
Suspend Pending ?
No
960
Restart Failsafe Timer and APM Fail-Suspend Timer
Yes
MATCH TO FIG. 9A2

FIG. 9A1

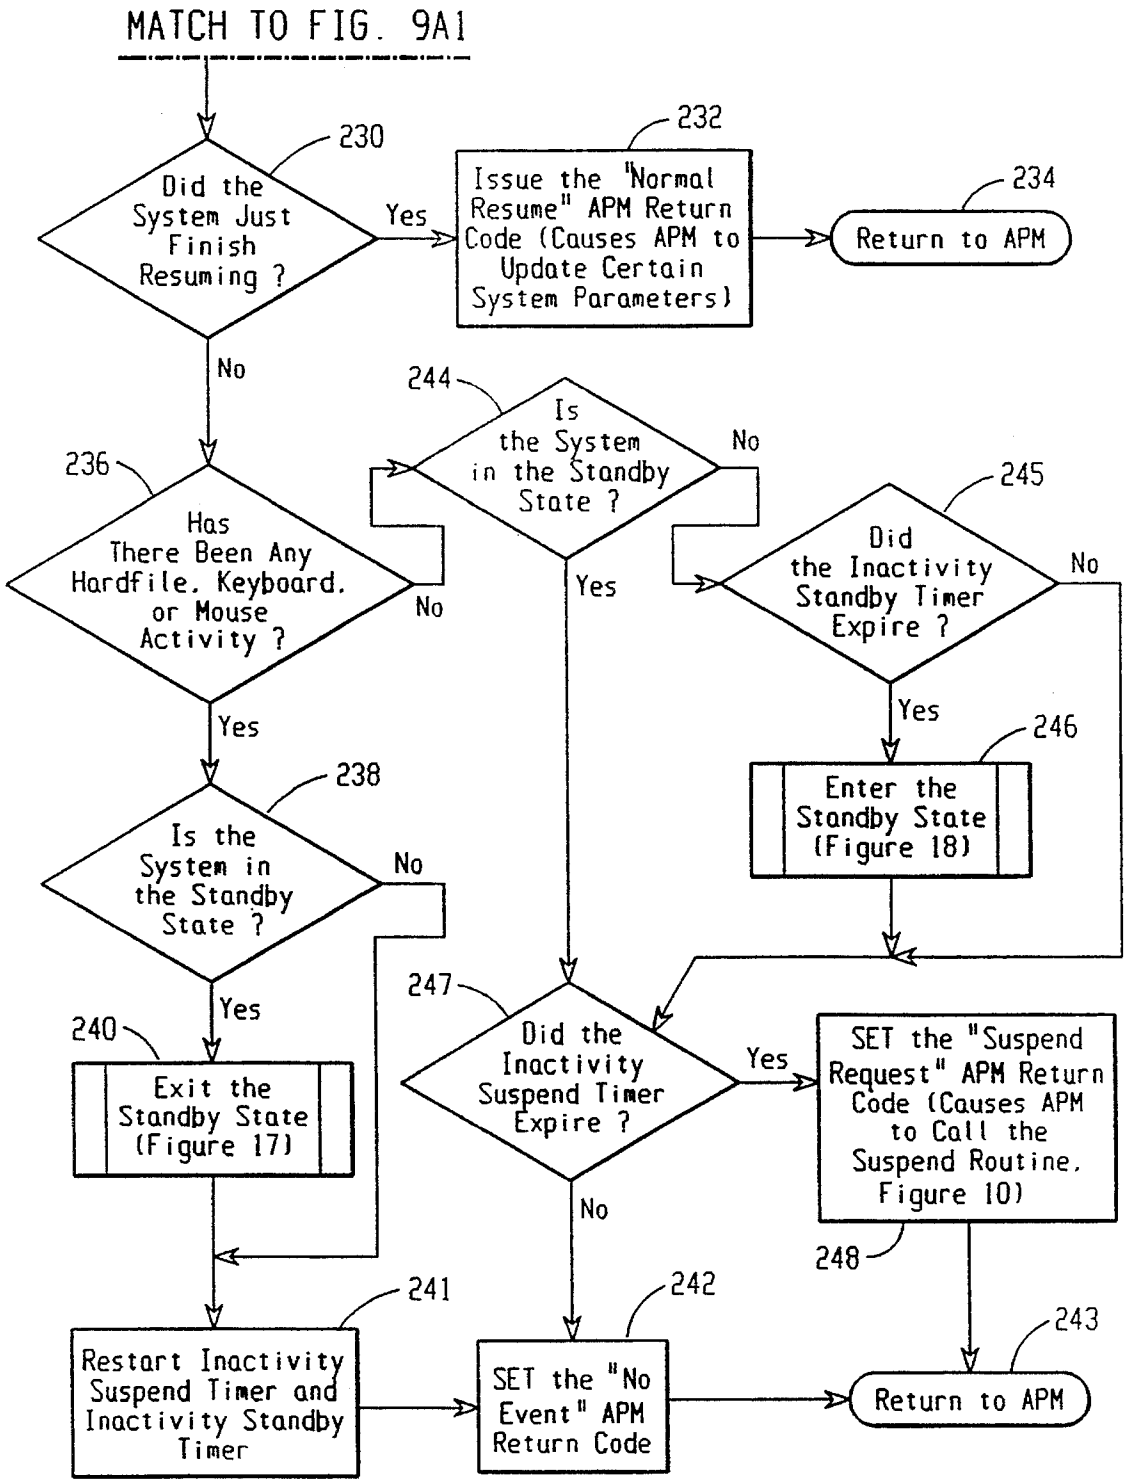

MATCH TO FIG. 9A1
230
Did the System Just Finish Resuming ?
Yes
232
Issue the "Normal Resume" APM Return Code (Causes APM to Update Certain System Parameters)
234
Return to APM
No
244
Is the System in the Standby State ?
No
Yes
236
Has There Been Any Hardfile, Keyboard, or Mouse Activity ?
No
245
Did the Inactivity Standby Timer Expire ?
No
Yes
246
Enter the Standby State (Figure 18)
Yes
238
Is the System in the Standby State ?
No
Yes
247
Did the Inactivity Suspend Timer Expire ?
Yes
SET the "Suspend Request" APM Return Code (Causes APM to Call the Suspend Routine, Figure 10)
240
Exit the Standby State (Figure 17)
No
248
241
Restart Inactivity Suspend Timer and Inactivity Standby Timer
242
SET the "No Event" APM Return Code
243
Return to APM

FIG. 9A2

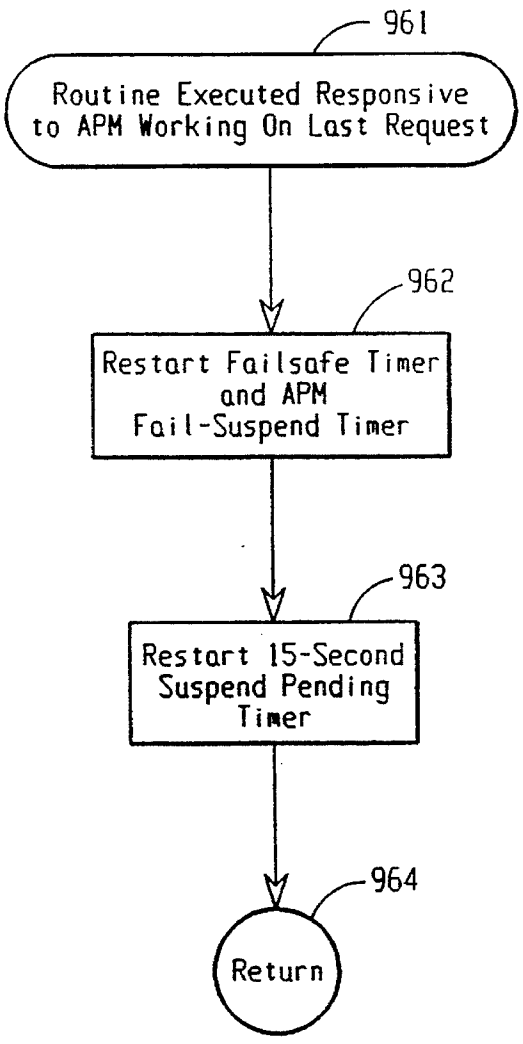

961
Routine Executed Responsive to APM Working On Last Request
962
Restart Failsafe Timer and APM Fail-Suspend Timer
963
Restart 15-Second Suspend Pending Timer
964
Return

FIG. 9B

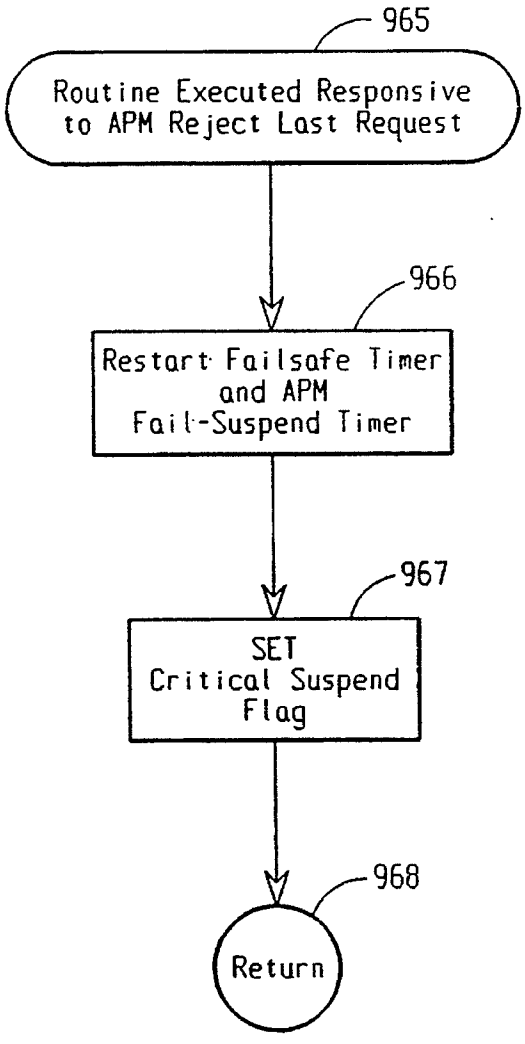

965
Routine Executed Responsive to APM Reject Last Request
966
Restart Failsafe Timer and APM Fail-Suspend Timer
967
SET Critical Suspend Flag
968
Return

FIG. 9C

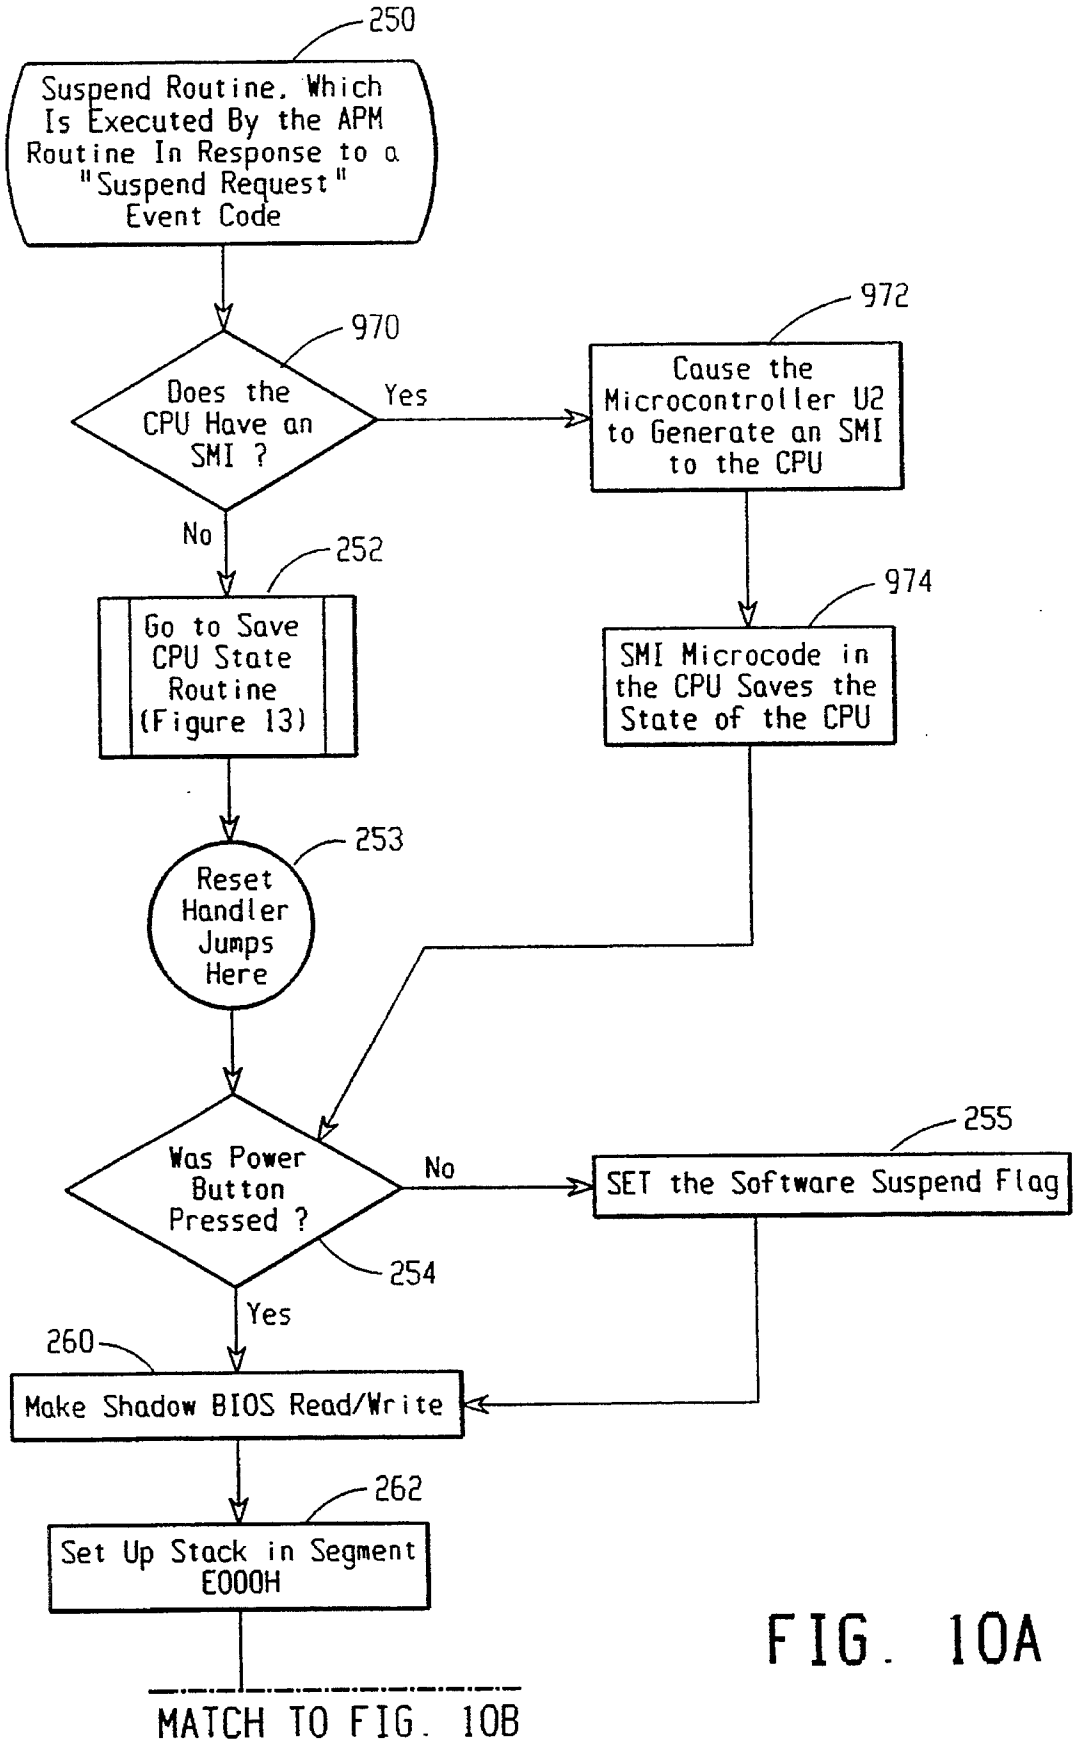

250
Suspend Routine. Which Is Executed By the APM Routine In Response to a "Suspend Request" Event Code
970
Does the CPU Have an SMI ?
Yes
No
972
Cause the Microcontroller U2 to Generate an SMI to the CPU
974
SMI Microcode in the CPU Saves the State of the CPU
252
Go to Save CPU State Routine (Figure 13)
253
Reset Handler Jumps Here
Was Power Button Pressed ?
No
255
SET the Software Suspend Flag
254
Yes
260
Make Shadow BIOS Read/Write
262
Set Up Stack in Segment E000H
MATCH TO FIG. 10B

FIG. 10A

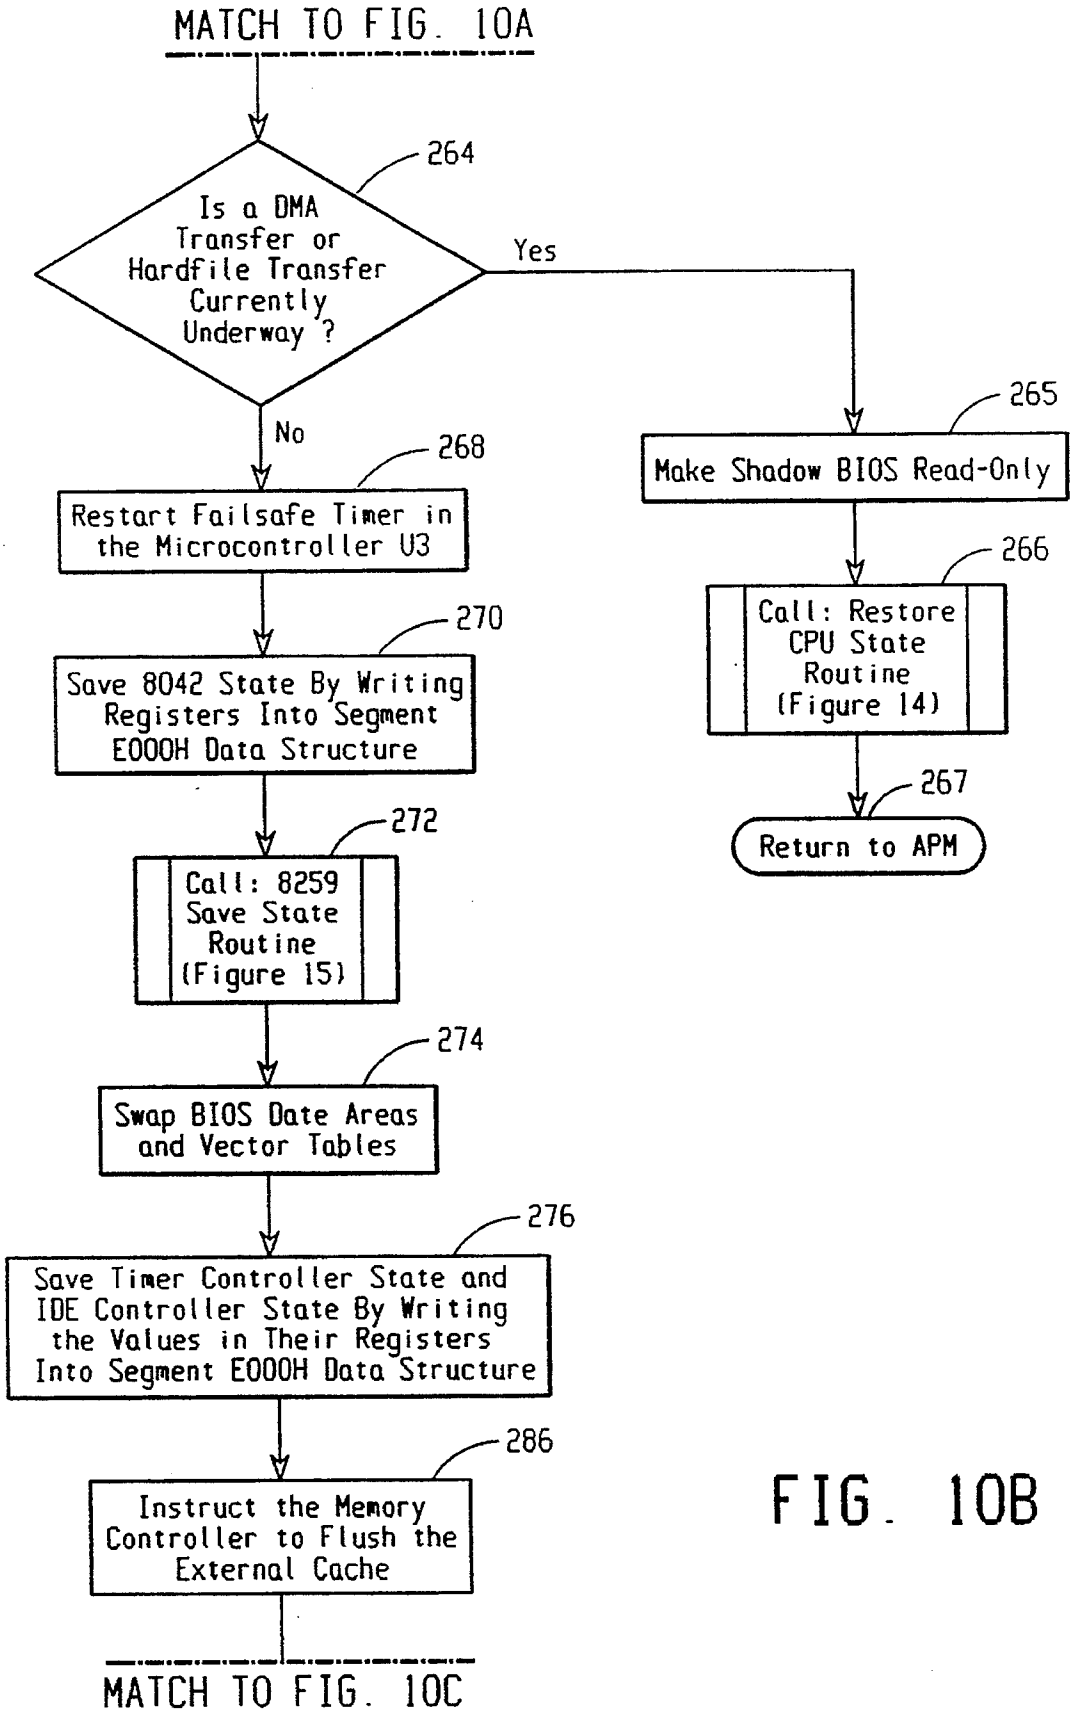

MATCH TO FIG. 10A
264
Is a DMA Transfer or Hardfile Transfer Currently Underway ?
Yes
No
265
Make Shadow BIOS Read-Only
266
Call: Restore CPU State Routine (Figure 14)
267
Return to APM
268
Restart Failsafe Timer in the Microcontroller U3
270
Save 8042 State By Writing Registers Into Segment E000H Data Structure
272
Call: 8259 Save State Routine (Figure 15)
274
Swap BIOS Date Areas and Vector Tables
276
Save Timer Controller State and IDE Controller State By Writing the Values in Their Registers Into Segment E000H Data Structure
286
Instruct the Memory Controller to Flush the External Cache
MATCH TO FIG. 10C

FIG. 10B

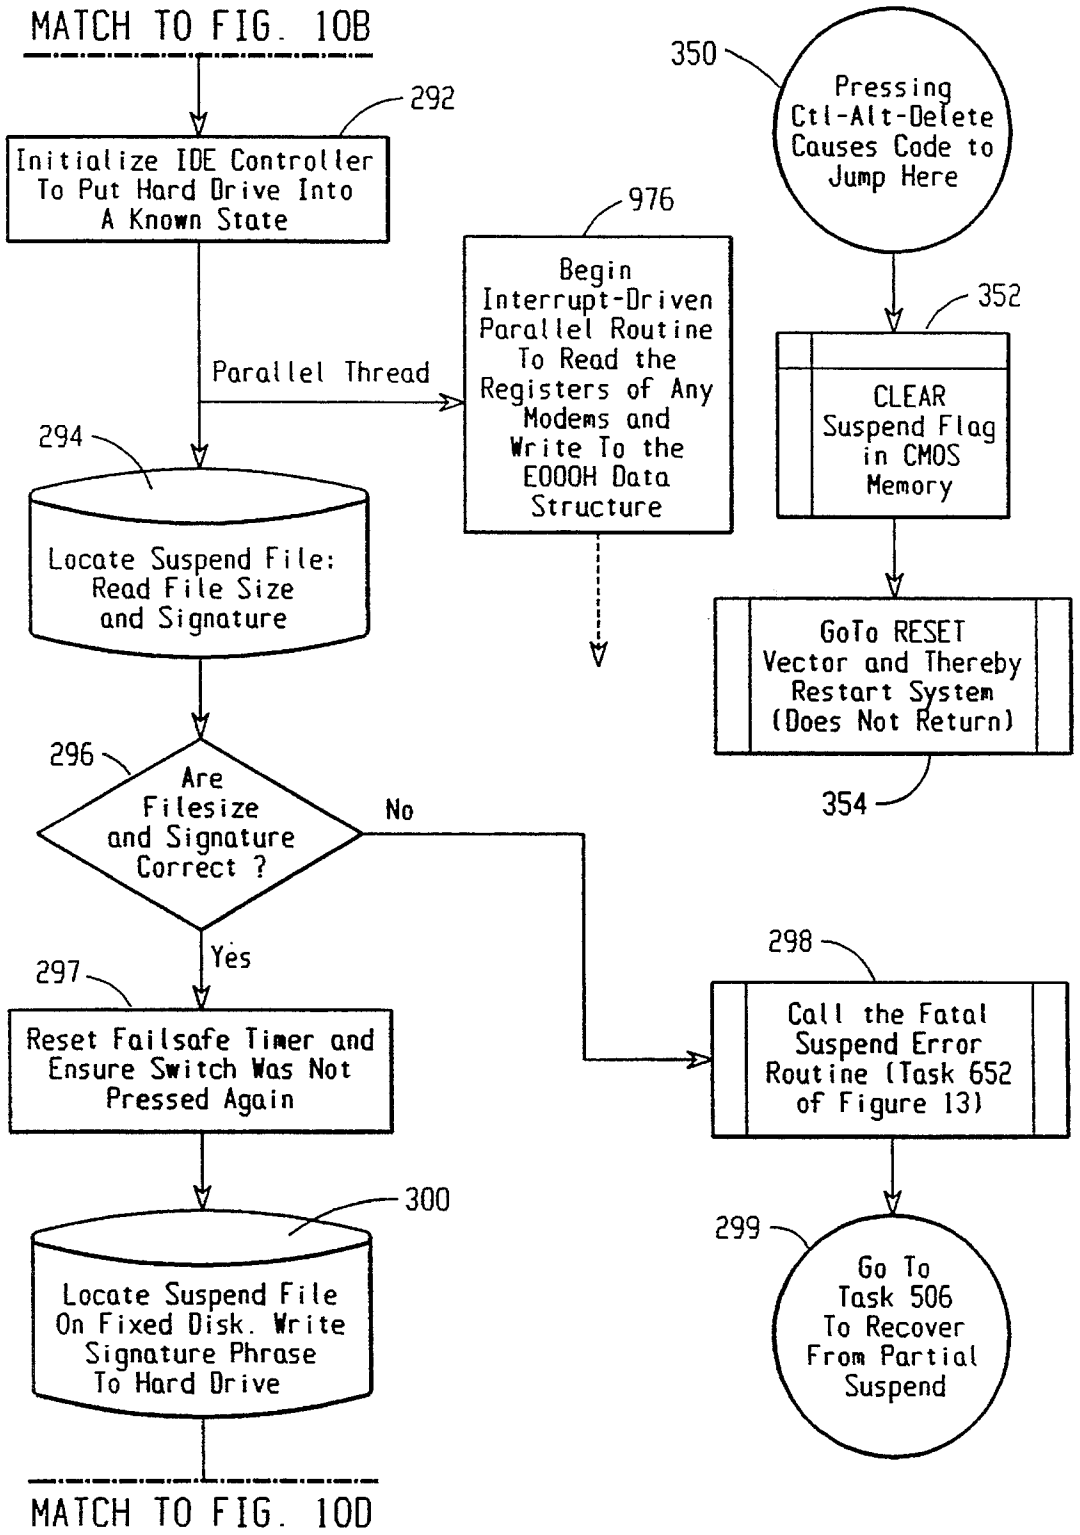

MATCH TO FIG. 10B
292
Initialize IDE Controller To Put Hard Drive Into A Known State
Parallel Thread
976
Begin Interrupt-Driven Parallel Routine To Read the Registers of Any Modems and Write To the E000H Data Structure
350
Pressing Ctl-Alt-Delete Causes Code to Jump Here
352
CLEAR Suspend Flag in CMOS Memory
GoTo RESET Vector and Thereby Restart System (Does Not Return)
354
294
Locate Suspend File: Read File Size and Signature
296
Are Filesize and Signature Correct ?
No
Yes
297
Reset Failsafe Timer and Ensure Switch Was Not Pressed Again
298
Call the Fatal Suspend Error Routine (Task 652 of Figure 13)
299
Go To Task 506 To Recover From Partial Suspend
300
Locate Suspend File On Fixed Disk. Write Signature Phrase To Hard Drive
MATCH TO FIG. 10D

FIG. 10C

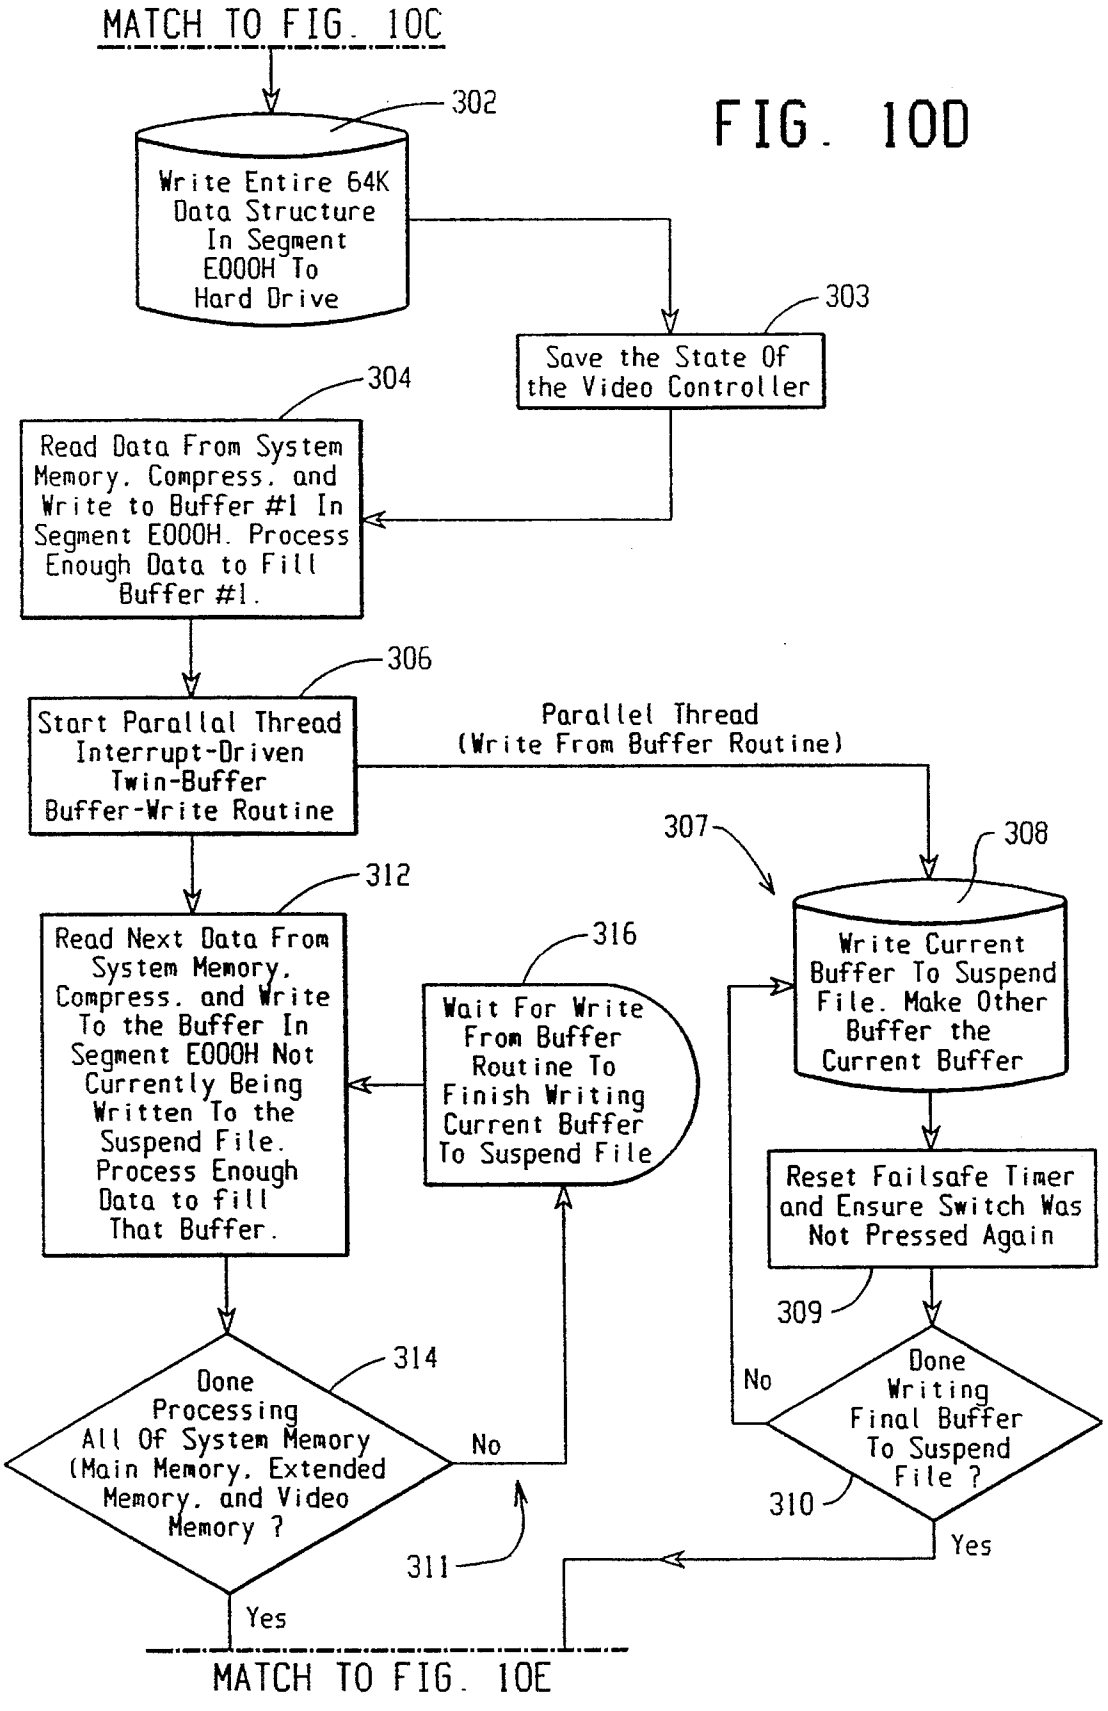

MATCH TO FIG. 10C
302
Write Entire 64K Data Structure In Segment E000H To Hard Drive
303
Save the State Of the Video Controller
304
Read Data From System Memory, Compress, and Write to Buffer #1 In Segment E000H. Process Enough Data to Fill Buffer #1.
306
Start Parallal Thread Interrupt-Driven Twin-Buffer Buffer-Write Routine
Parallel Thread (Write From Buffer Routine)
307
308
Write Current Buffer To Suspend File. Make Other Buffer the Current Buffer
312
Read Next Data From System Memory, Compress, and Write To the Buffer In Segment E000H Not Currently Being Written To the Suspend File. Process Enough Data to fill That Buffer.
316
Wait For Write From Buffer Routine To Finish Writing Current Buffer To Suspend File
Reset Failsafe Timer and Ensure Switch Was Not Pressed Again
309
314
Done Processing All Of System Memory (Main Memory, Extended Memory, and Video Memory ?
No
Done Writing Final Buffer To Suspend File ?
No
310
Yes
311
Yes
MATCH TO FIG. 10E

FIG. 10D

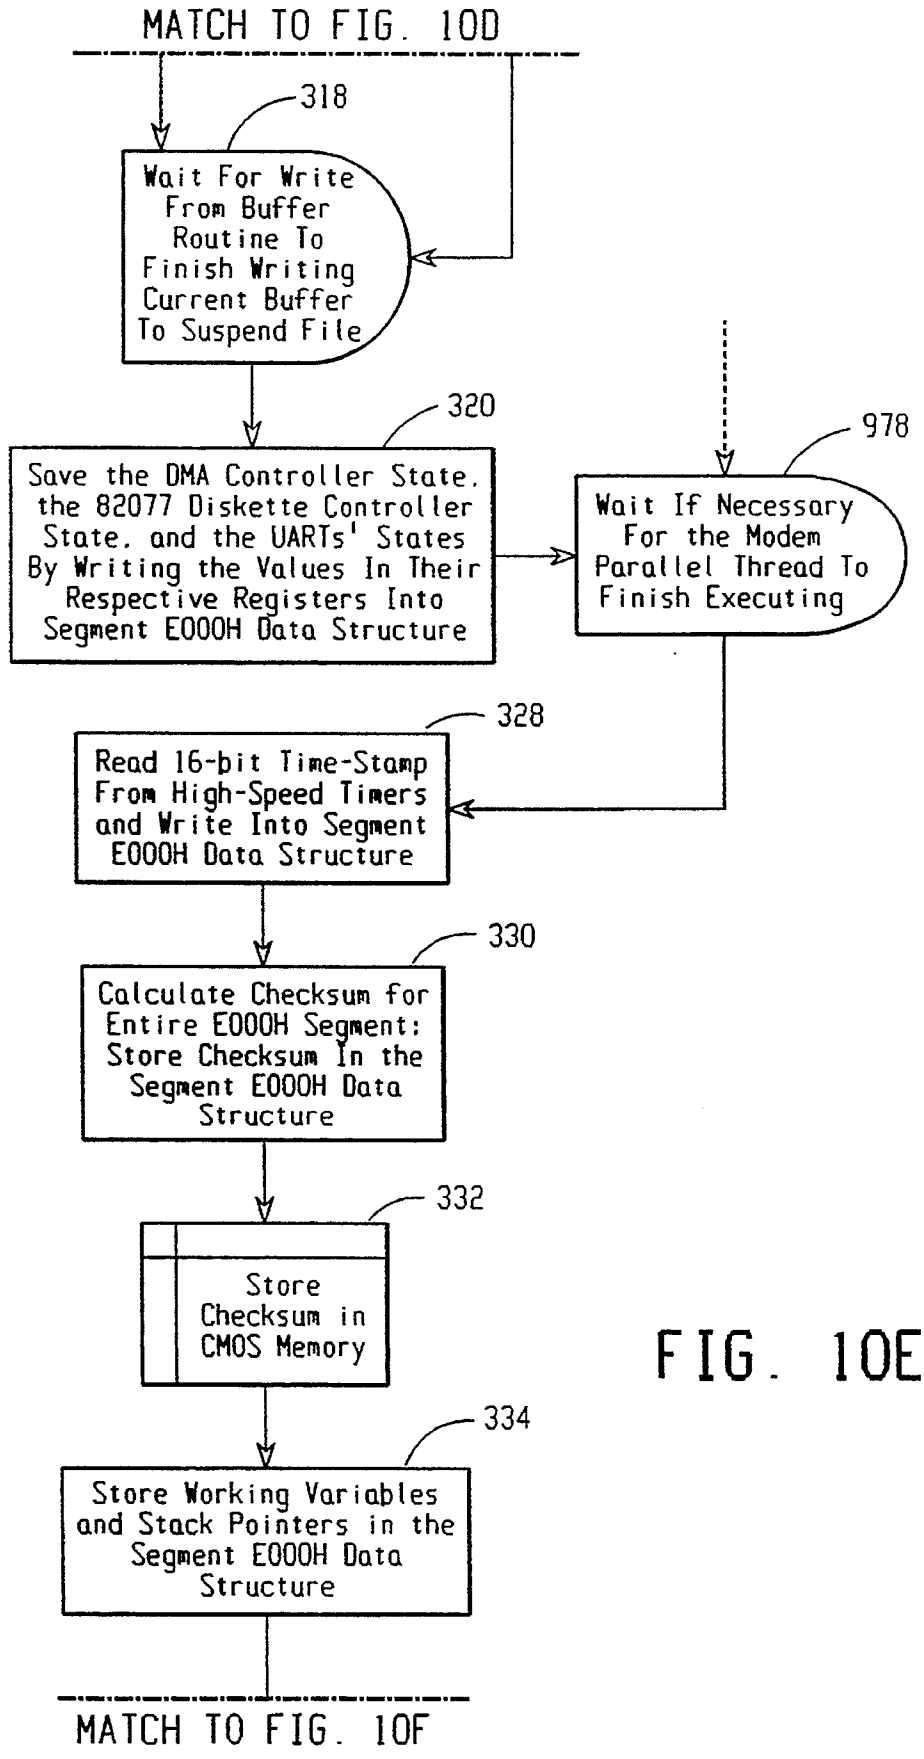

MATCH TO FIG. 10D
318
Wait For Write From Buffer Routine To Finish Writing Current Buffer To Suspend File
320
Save the DMA Controller State, the 82077 Diskette Controller State, and the UARTs' States By Writing the Values In Their Respective Registers Into Segment E000H Data Structure
978
Wait If Necessary For the Modem Parallel Thread To Finish Executing
328
Read 16-bit Time-Stamp From High-Speed Timers and Write Into Segment E000H Data Structure
330
Calculate Checksum for Entire E000H Segment; Store Checksum In the Segment E000H Data Structure
332
Store Checksum in CMOS Memory
334
Store Working Variables and Stack Pointers in the Segment E000H Data Structure
MATCH TO FIG. 10F

FIG. 10E

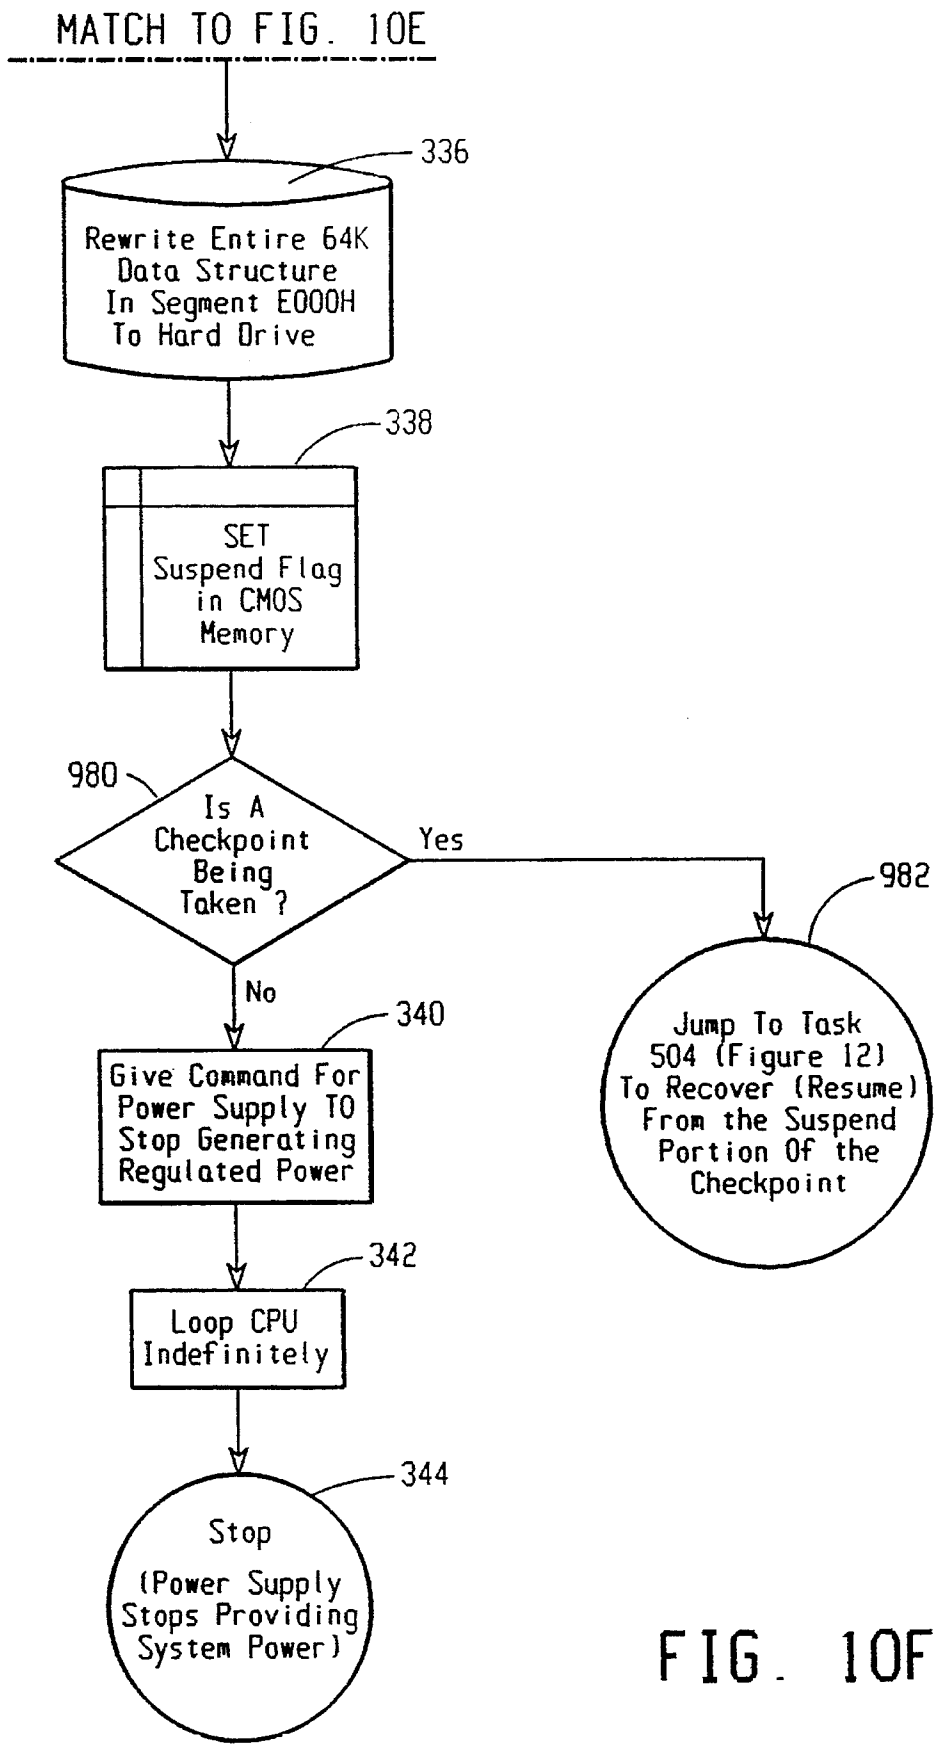

MATCH TO FIG. 10E
336
Rewrite Entire 64K Data Structure In Segment E000H To Hard Drive
338
SET Suspend Flag in CMOS Memory
980
Is A Checkpoint Being Taken ?
Yes
No
982
Jump To Task 504 (Figure 12) To Recover (Resume) From the Suspend Portion Of the Checkpoint
340
Give Command For Power Supply TO Stop Generating Regulated Power
342
Loop CPU Indefinitely
344
Stop (Power Supply Stops Providing System Power)

FIG. 10F

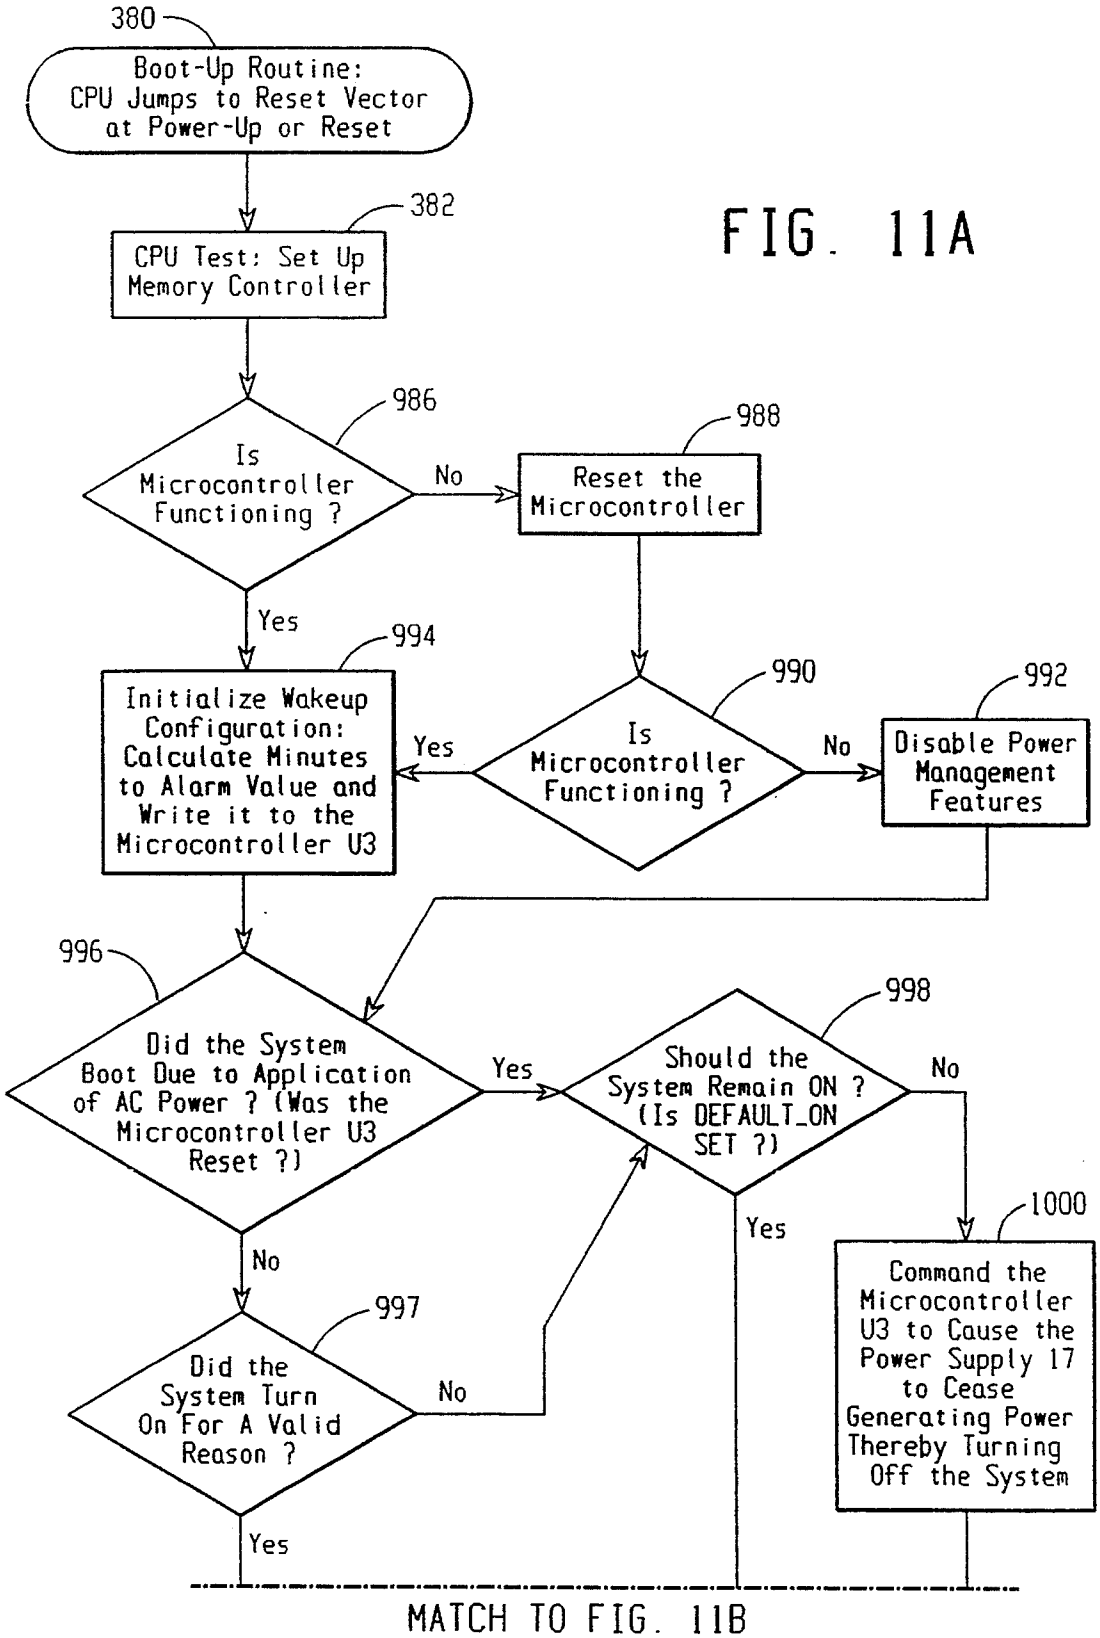

380
Boot-Up Routine: CPU Jumps to Reset Vector at Power-Up or Reset
382
CPU Test: Set Up Memory Controller
986
Is Microcontroller Functioning ?
No
988
Reset the Microcontroller
Yes
994
Initialize Wakeup Configuration: Calculate Minutes to Alarm Value and Write it to the Microcontroller U3
Yes
990
Is Microcontroller Functioning ?
No
992
Disable Power Management Features
996
Did the System Boot Due to Application of AC Power ? (Was the Microcontroller U3 Reset ?)
Yes
998
Should the System Remain ON ? (Is DEFAULT_ON SET ?)
No
Yes
1000
Command the Microcontroller U3 to Cause the Power Supply 17 to Cease Generating Power Thereby Turning Off the System
No
997
Did the System Turn On For A Valid Reason ?
No
Yes
MATCH TO FIG. 11B

FIG. 11A

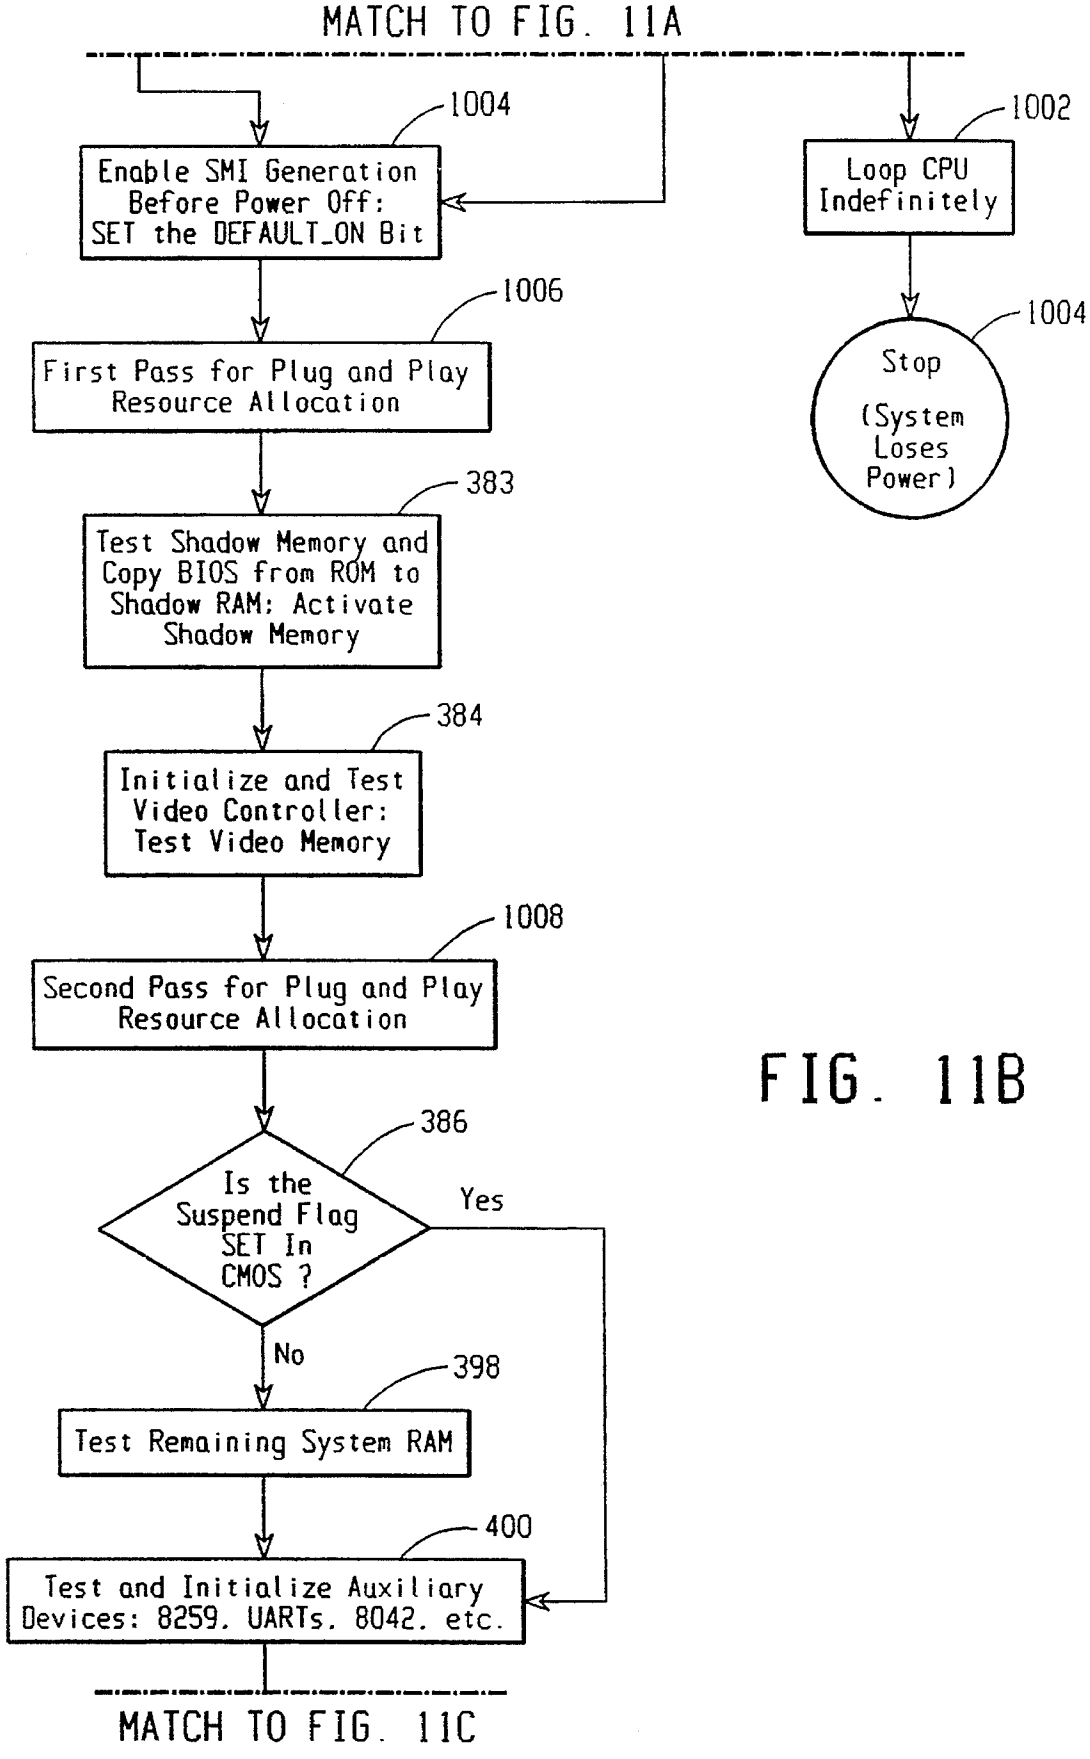

MATCH TO FIG. 11A
1004
Enable SMI Generation Before Power Off: SET the DEFAULT_ON Bit
1002
Loop CPU Indefinitely
1004
Stop (System Loses Power)
1006
First Pass for Plug and Play Resource Allocation
383
Test Shadow Memory and Copy BIOS from ROM to Shadow RAM: Activate Shadow Memory
384
Initialize and Test Video Controller: Test Video Memory
1008
Second Pass for Plug and Play Resource Allocation
386
Is the Suspend Flag SET In CMOS ?
Yes
No
398
Test Remaining System RAM
400
Test and Initialize Auxiliary Devices: 8259. UARTs. 8042. etc.
MATCH TO FIG. 11C

FIG. 11B

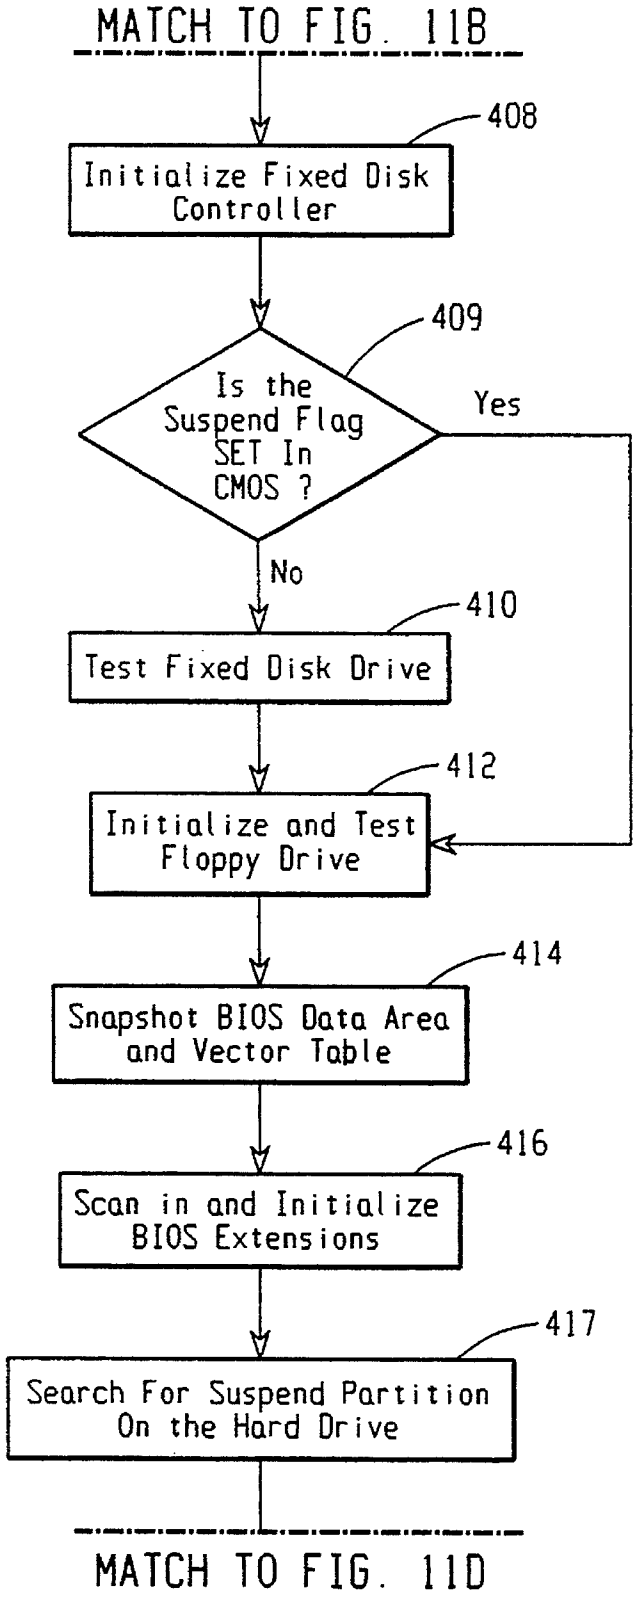

MATCH TO FIG. 11B
408
Initialize Fixed Disk Controller
409
Is the Suspend Flag SET In CMOS ?
Yes
No
410
Test Fixed Disk Drive
412
Initialize and Test Floppy Drive
414
Snapshot BIOS Data Area and Vector Table
416
Scan in and Initialize BIOS Extensions
417
Search For Suspend Partition On the Hard Drive
MATCH TO FIG. 11D

FIG. 11C

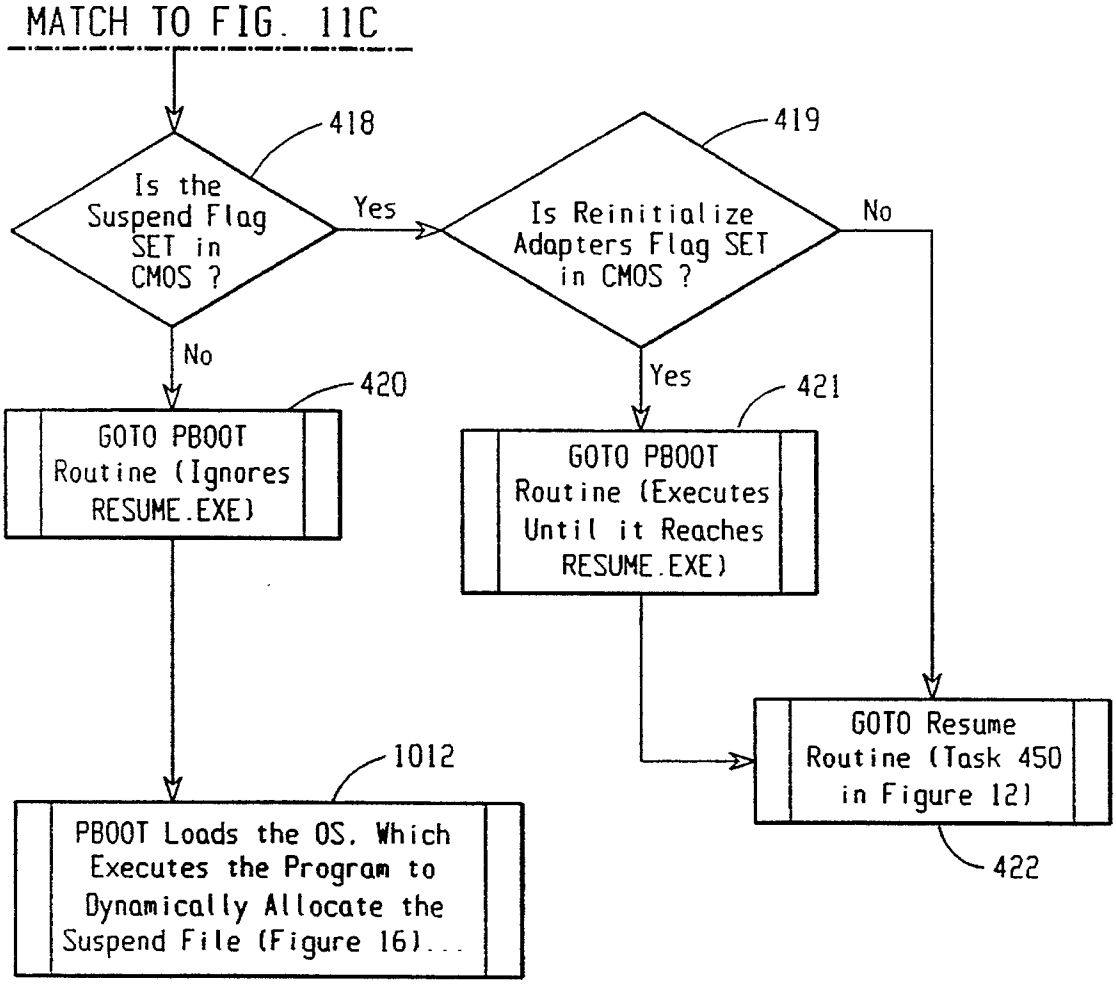

MATCH TO FIG. 11C
418
Is the Suspend Flag SET in CMOS ?
Yes
419
Is Reinitialize Adapters Flag SET in CMOS ?
No
No
Yes
420
GOTO PBOOT Routine (Ignores RESUME.EXE)
421
GOTO PBOOT Routine (Executes Until it Reaches RESUME.EXE)
GOTO Resume Routine (Task 450 in Figure 12)
422
1012
PBOOT Loads the OS. Which Executes the Program to Dynamically Allocate the Suspend File (Figure 16)...

FIG. 11D

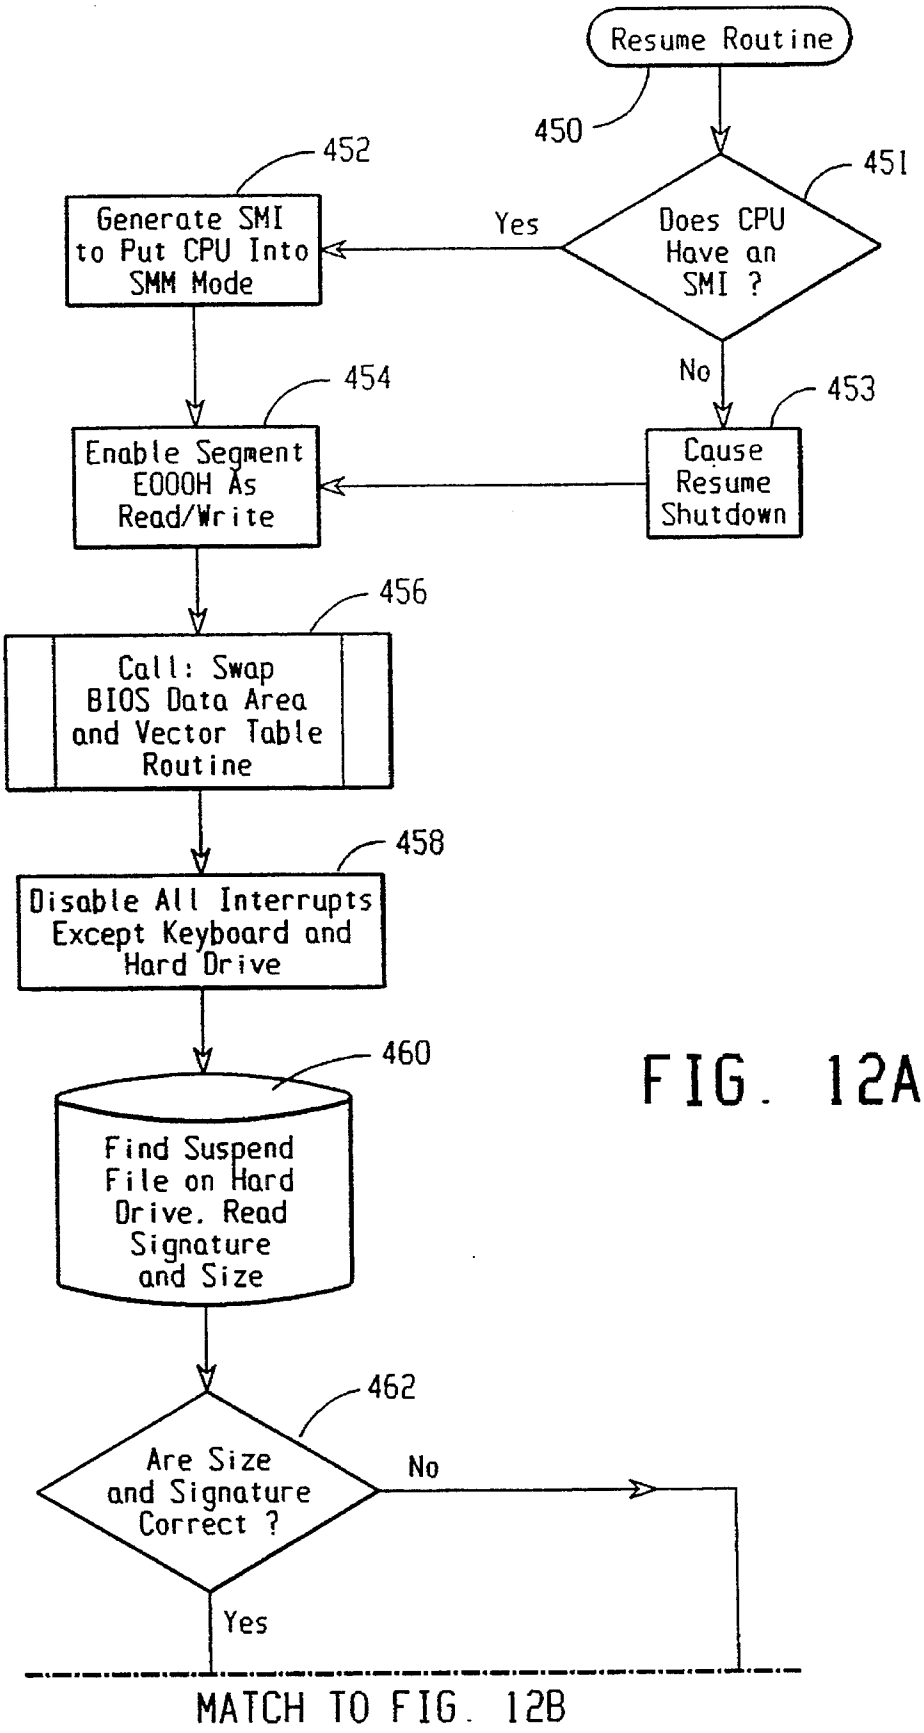

Resume Routine
450
451
Does CPU Have an SMI ?
Yes
No
452
Generate SMI to Put CPU Into SMM Mode
453
Cause Resume Shutdown
454
Enable Segment E000H As Read/Write
456
Call: Swap BIOS Data Area and Vector Table Routine
458
Disable All Interrupts Except Keyboard and Hard Drive
460
Find Suspend File on Hard Drive. Read Signature and Size
462
Are Size and Signature Correct ?
No
Yes
MATCH TO FIG. 12B

FIG. 12A

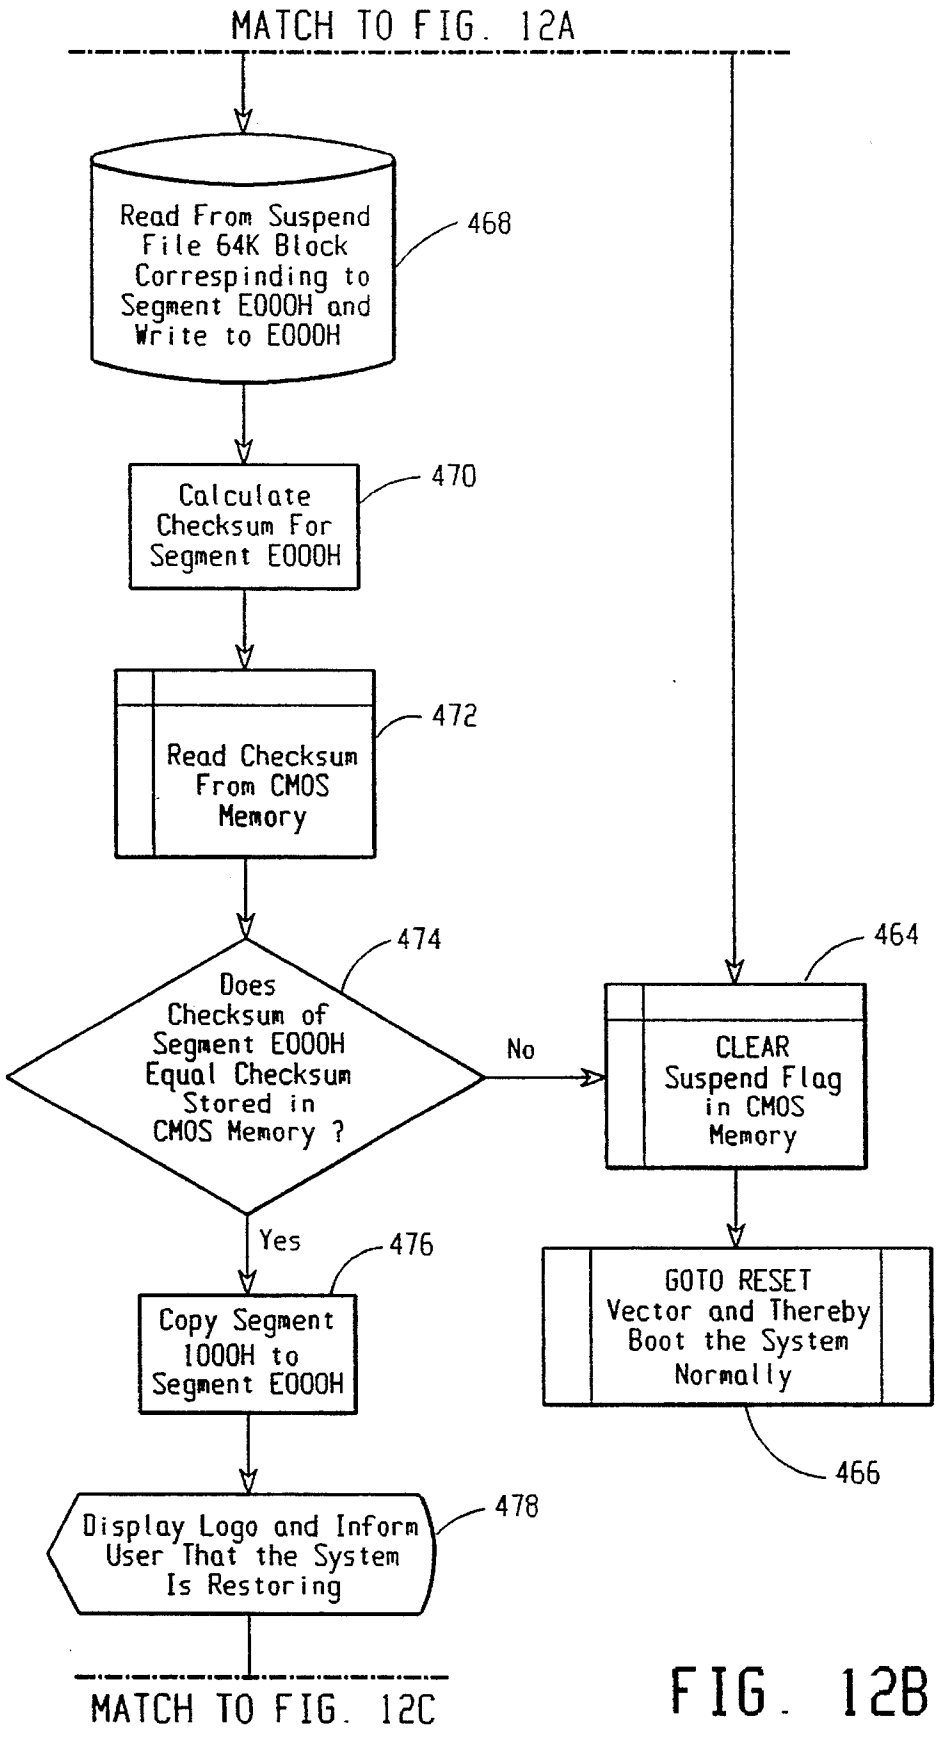
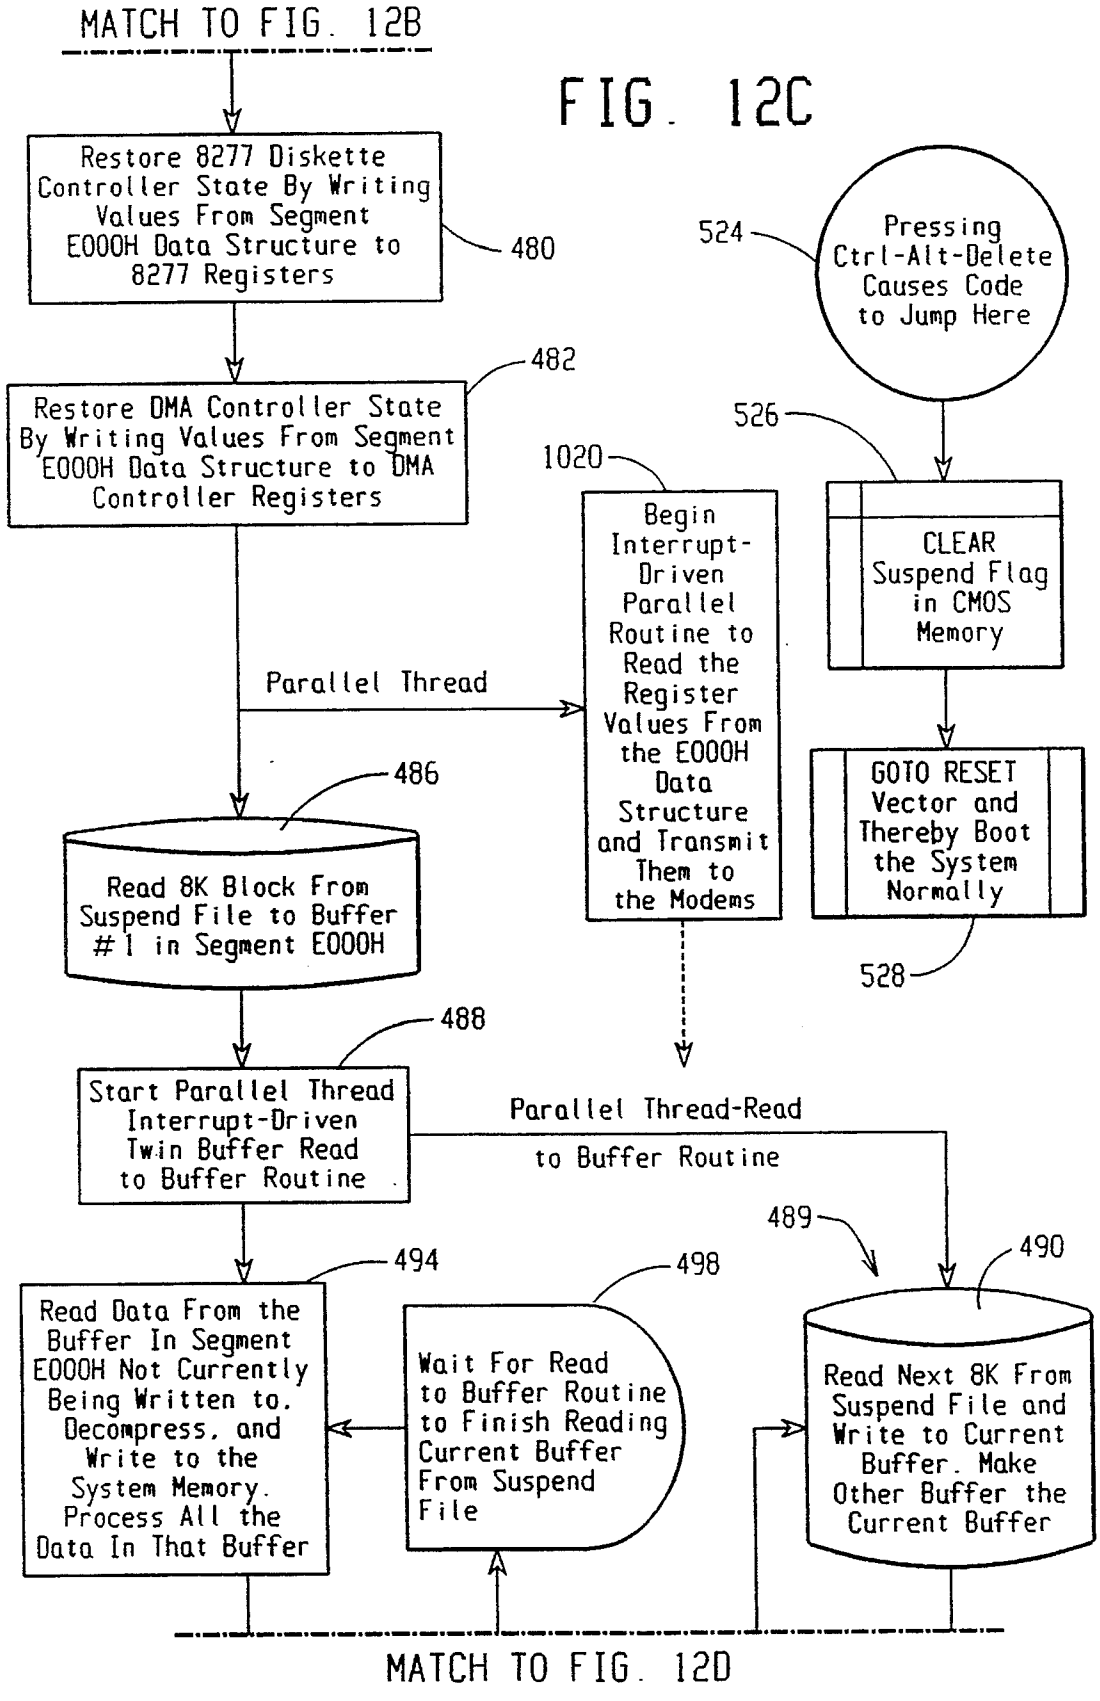

MATCH TO FIG. 12A
Read From Suspend File 64K Block Correspinding to Segment E000H and Write to E000H
468
Calculate Checksum For Segment E000H
470
Read Checksum From CMOS Memory
472
Does Checksum of Segment E000H Equal Checksum Stored in CMOS Memory ?
474
No
Yes
CLEAR Suspend Flag in CMOS Memory
464
GOTO RESET Vector and Thereby Boot the System Normally
466
Copy Segment 1000H to Segment E000H
476
Display Logo and Inform User That the System Is Restoring
478
MATCH TO FIG. 12C

FIG. 12B


MATCH TO FIG. 12B
FIG. 12C
Restore 8277 Diskette Controller State By Writing Values From Segment E000H Data Structure to 8277 Registers
480
Restore DMA Controller State By Writing Values From Segment E000H Data Structure to DMA Controller Registers
482
Pressing Ctrl-Alt-Delete Causes Code to Jump Here
524
526
CLEAR Suspend Flag in CMOS Memory
GOTO RESET Vector and Thereby Boot the System Normally
528
1020
Begin Interrupt-Driven Parallel Routine to Read the Register Values From the E000H Data Structure and Transmit Them to the Modems
Parallel Thread
Read 8K Block From Suspend File to Buffer #1 in Segment E000H
486
Start Parallel Thread Interrupt-Driven Twin Buffer Read to Buffer Routine
488
Parallel Thread-Read to Buffer Routine
489
490
Read Next 8K From Suspend File and Write to Current Buffer. Make Other Buffer the Current Buffer
Wait For Read to Buffer Routine to Finish Reading Current Buffer From Suspend File
498
Read Data From the Buffer In Segment E000H Not Currently Being Written to. Decompress, and Write to the System Memory. Process All the Data In That Buffer
494
MATCH TO FIG. 12D

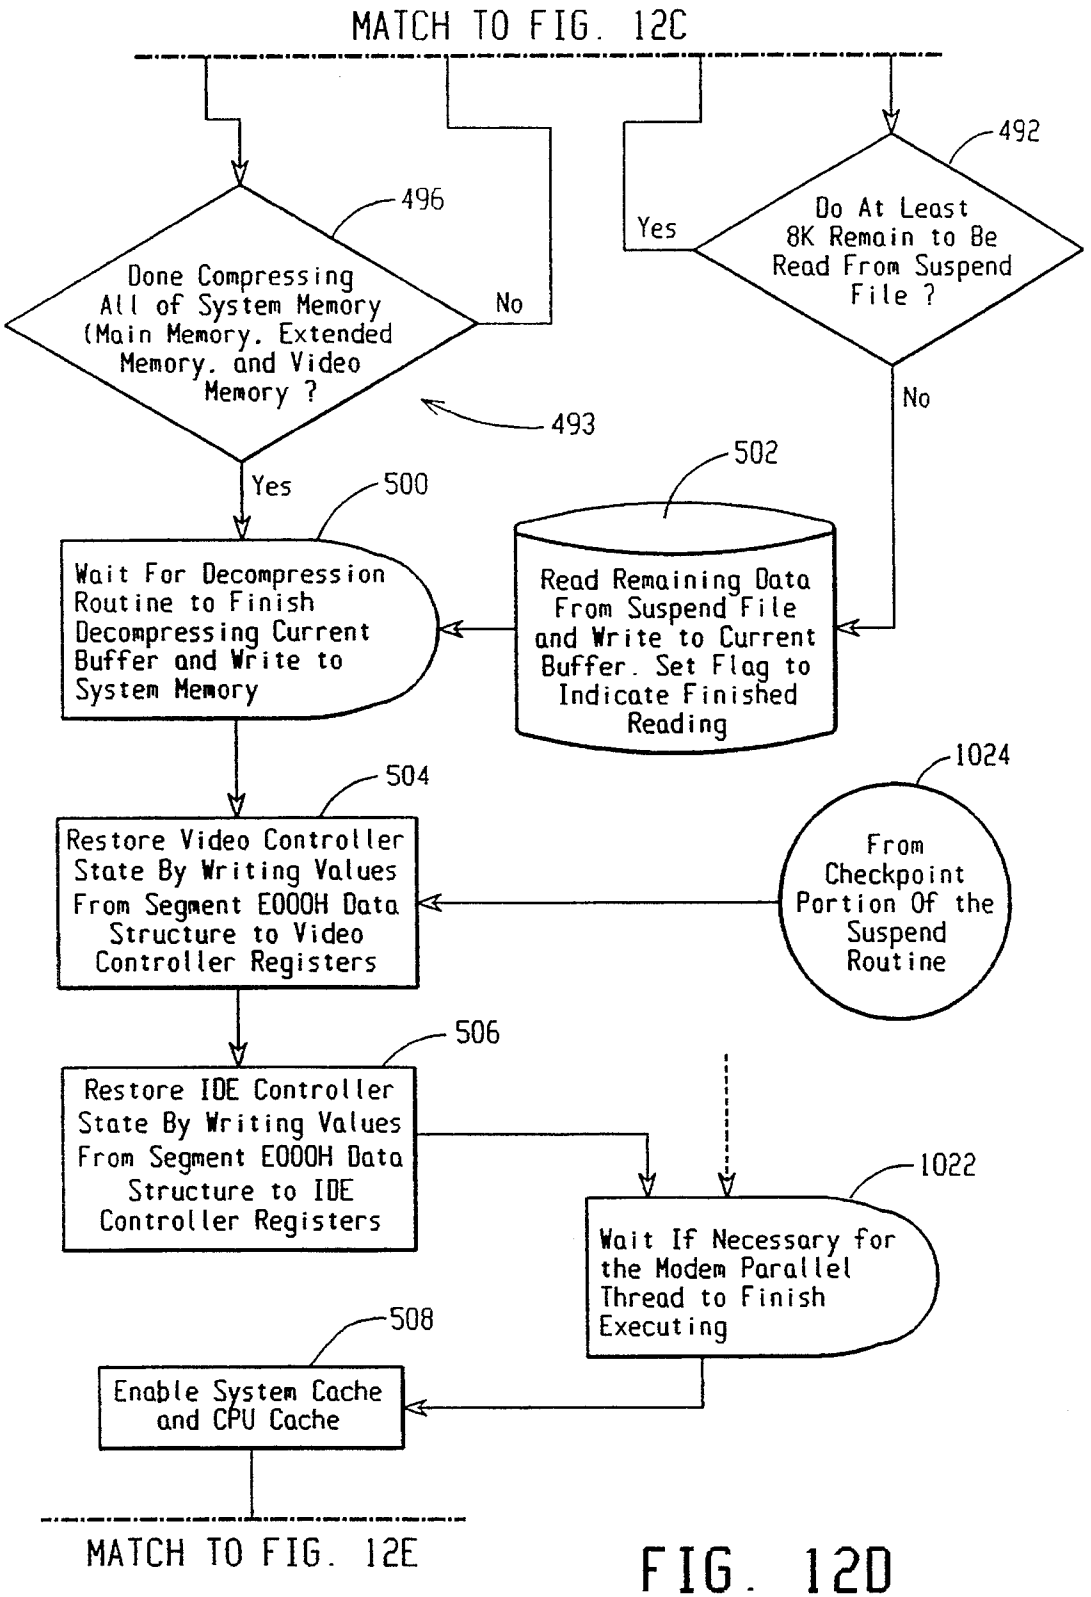

MATCH TO FIG. 12C
492
Do At Least 8K Remain to Be Read From Suspend File ?
Yes
No
496
Done Compressing All of System Memory (Main Memory, Extended Memory, and Video Memory ?
No
493
Yes
500
Wait For Decompression Routine to Finish Decompressing Current Buffer and Write to System Memory
502
Read Remaining Data From Suspend File and Write to Current Buffer. Set Flag to Indicate Finished Reading
504
Restore Video Controller State By Writing Values From Segment E000H Data Structure to Video Controller Registers
1024
From Checkpoint Portion Of the Suspend Routine
506
Restore IDE Controller State By Writing Values From Segment E000H Data Structure to IDE Controller Registers
1022
Wait If Necessary for the Modem Parallel Thread to Finish Executing
508
Enable System Cache and CPU Cache
MATCH TO FIG. 12E

FIG. 12D

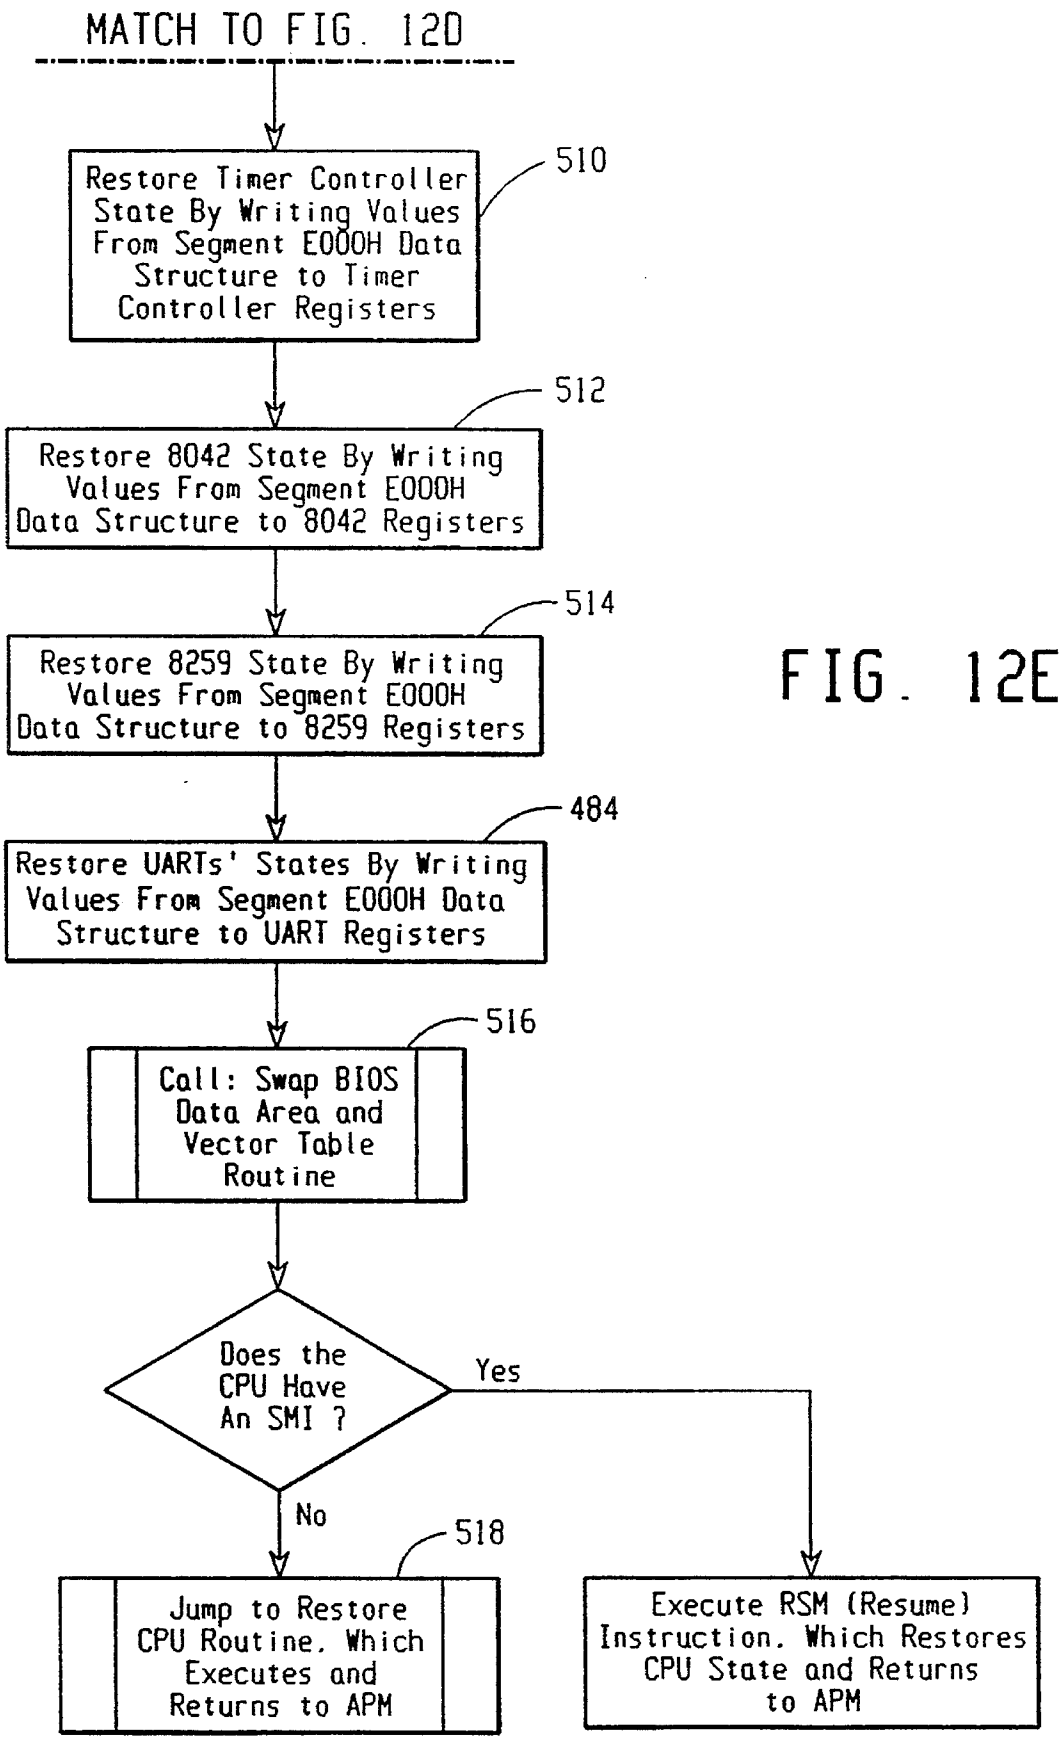
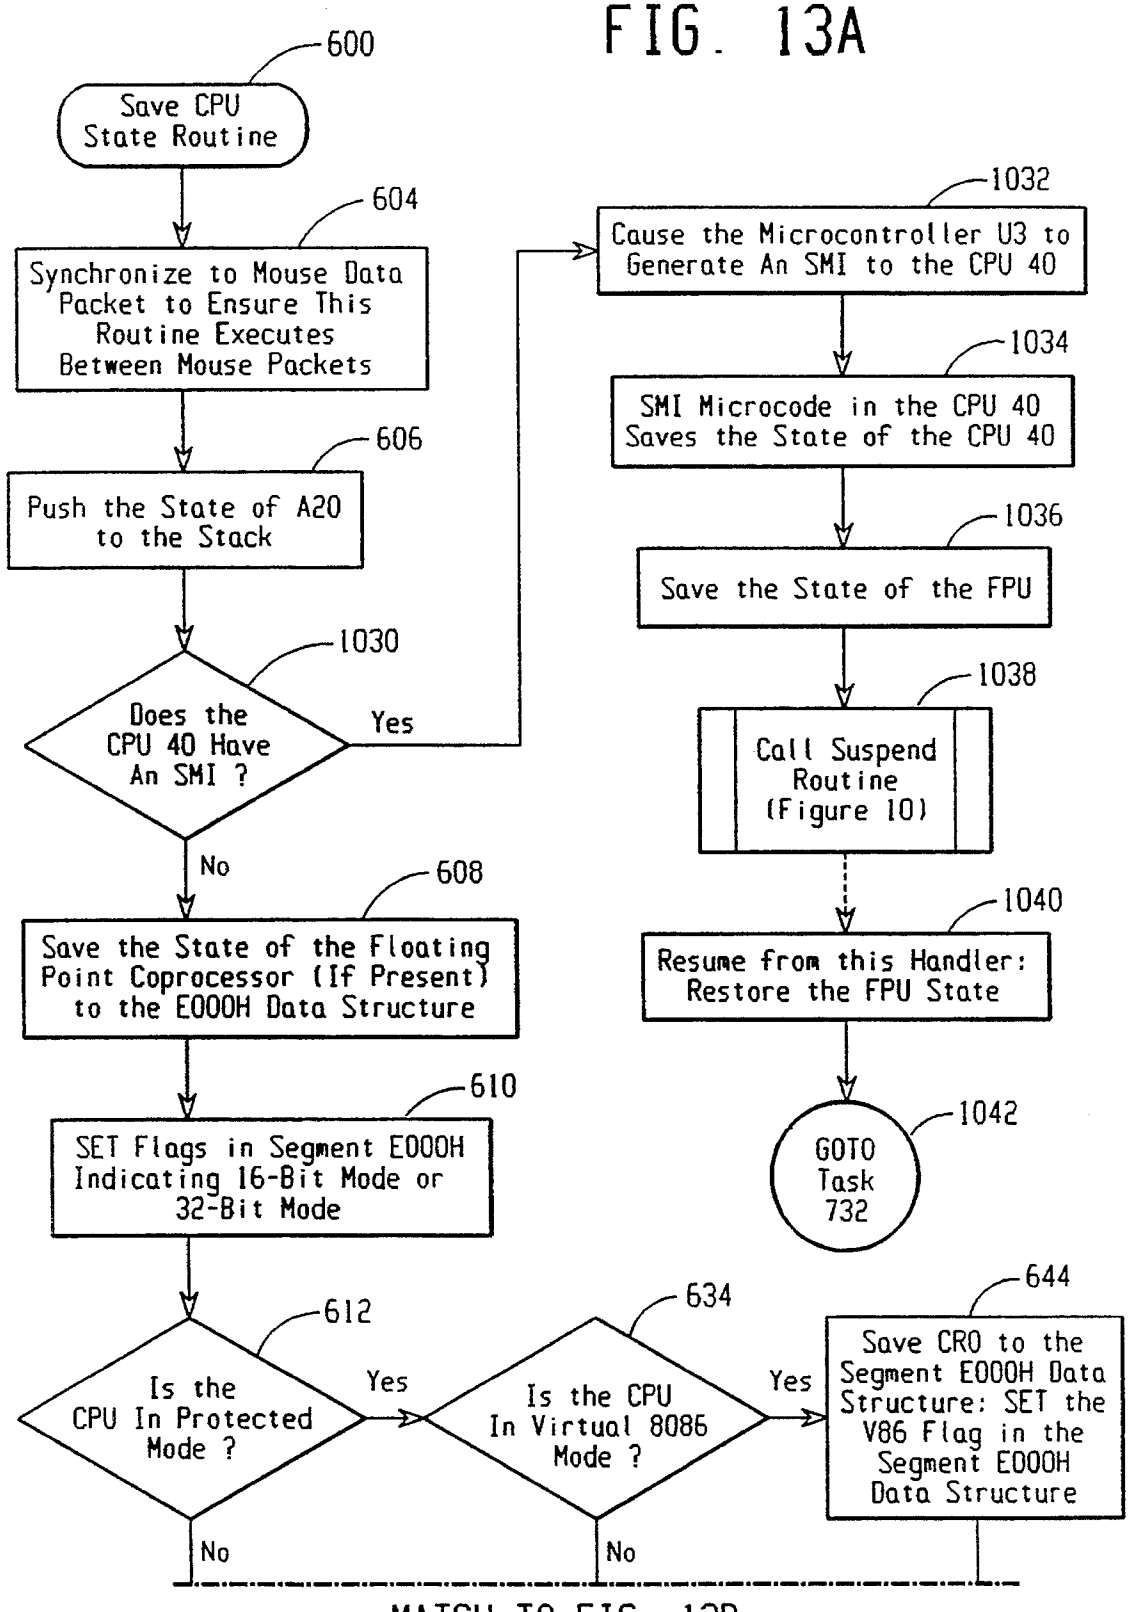

MATCH TO FIG. 12D
Restore Timer Controller State By Writing Values From Segment E000H Data Structure to Timer Controller Registers
510
Restore 8042 State By Writing Values From Segment E000H Data Structure to 8042 Registers
512
Restore 8259 State By Writing Values From Segment E000H Data Structure to 8259 Registers
514
Restore UARTs' States By Writing Values From Segment E000H Data Structure to UART Registers
484
Call: Swap BIOS Data Area and Vector Table Routine
516
Does the CPU Have An SMI ?
Yes
No
Jump to Restore CPU Routine, Which Executes and Returns to APM
518
Execute RSM (Resume) Instruction, Which Restores CPU State and Returns to APM

FIG. 12E

FIG. 13A



MATCH TO FIG. 13B

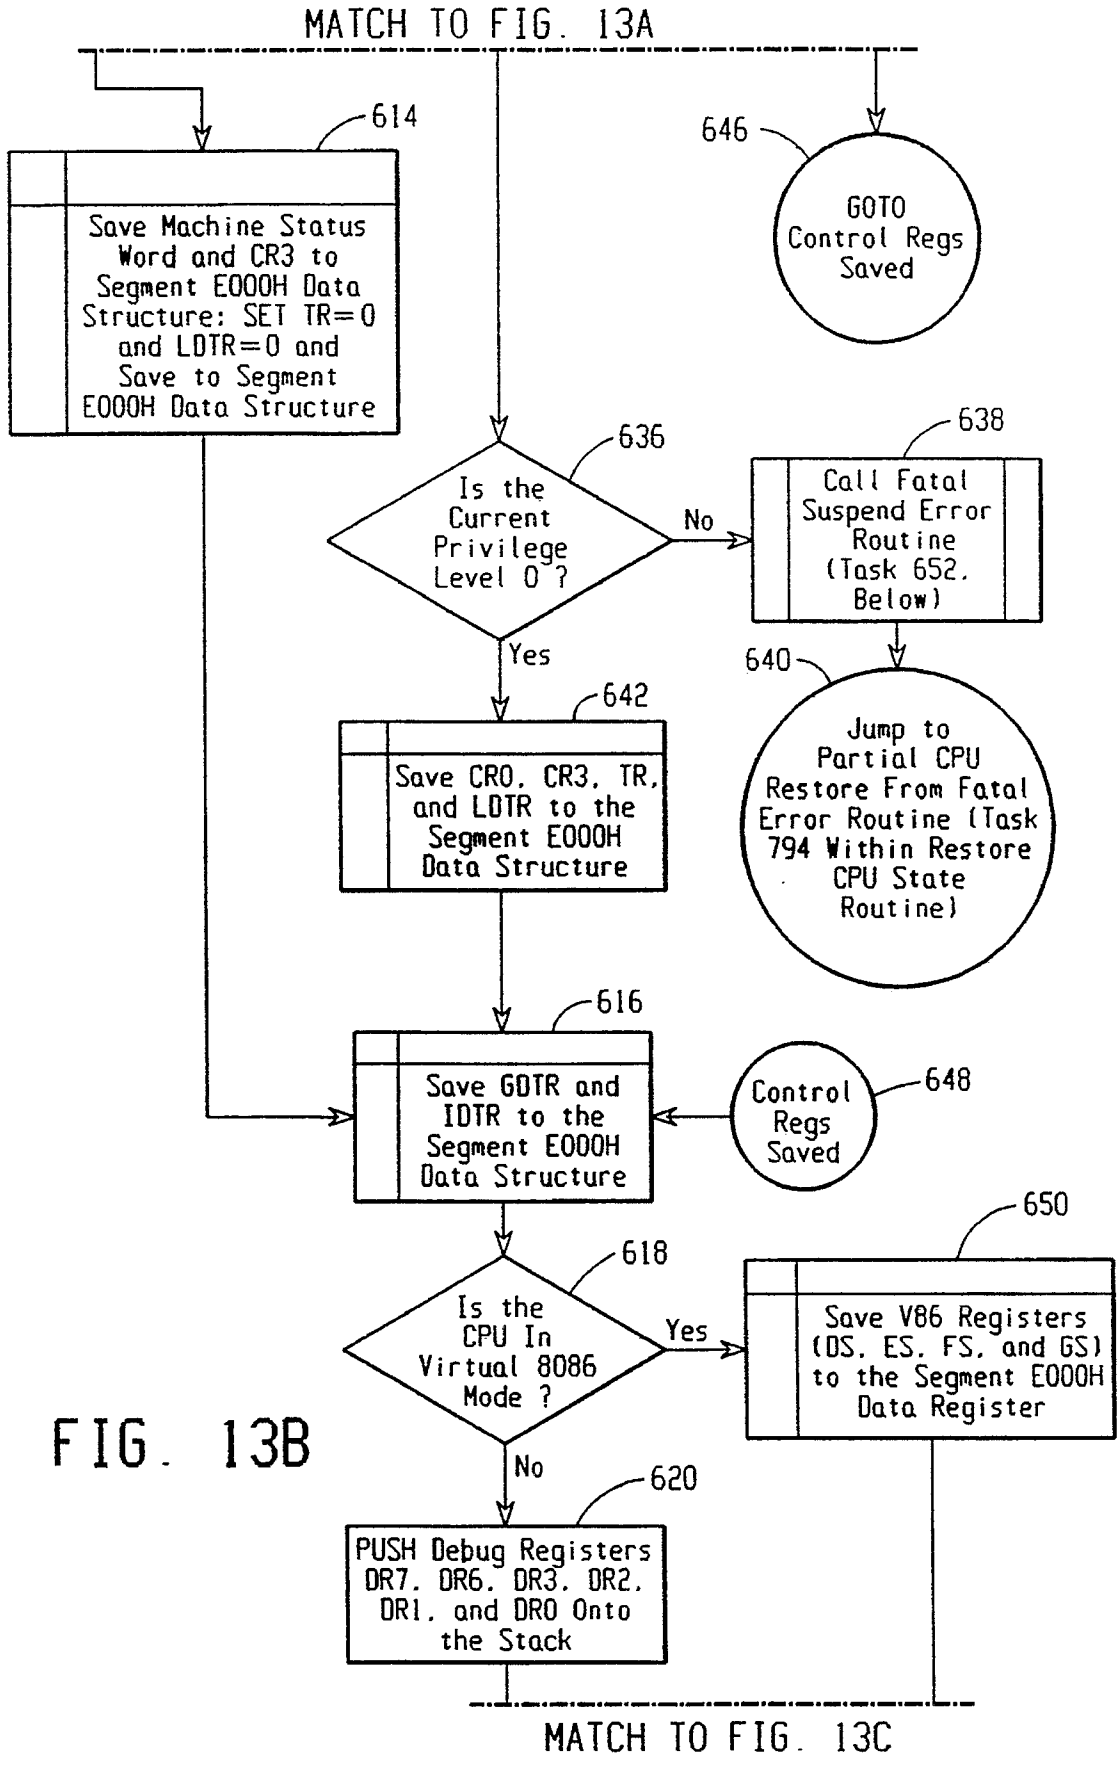

MATCH TO FIG. 13A
614
Save Machine Status Word and CR3 to Segment E000H Data Structure: SET TR=0 and LDTR=0 and Save to Segment E000H Data Structure
646
GOTO Control Regs Saved
636
Is the Current Privilege Level 0 ?
No
638
Call Fatal Suspend Error Routine (Task 652, Below)
Yes
640
Jump to Partial CPU Restore From Fatal Error Routine (Task 794 Within Restore CPU State Routine)
642
Save CR0, CR3, TR, and LDTR to the Segment E000H Data Structure
616
Save GDTR and IDTR to the Segment E000H Data Structure
Control Regs Saved
648
650
618
Is the CPU In Virtual 8086 Mode ?
Yes
Save V86 Registers (DS, ES, FS, and GS) to the Segment E000H Data Register
No
620
PUSH Debug Registers DR7, DR6, DR3, DR2, DR1, and DR0 Onto the Stack
MATCH TO FIG. 13C

FIG. 13B

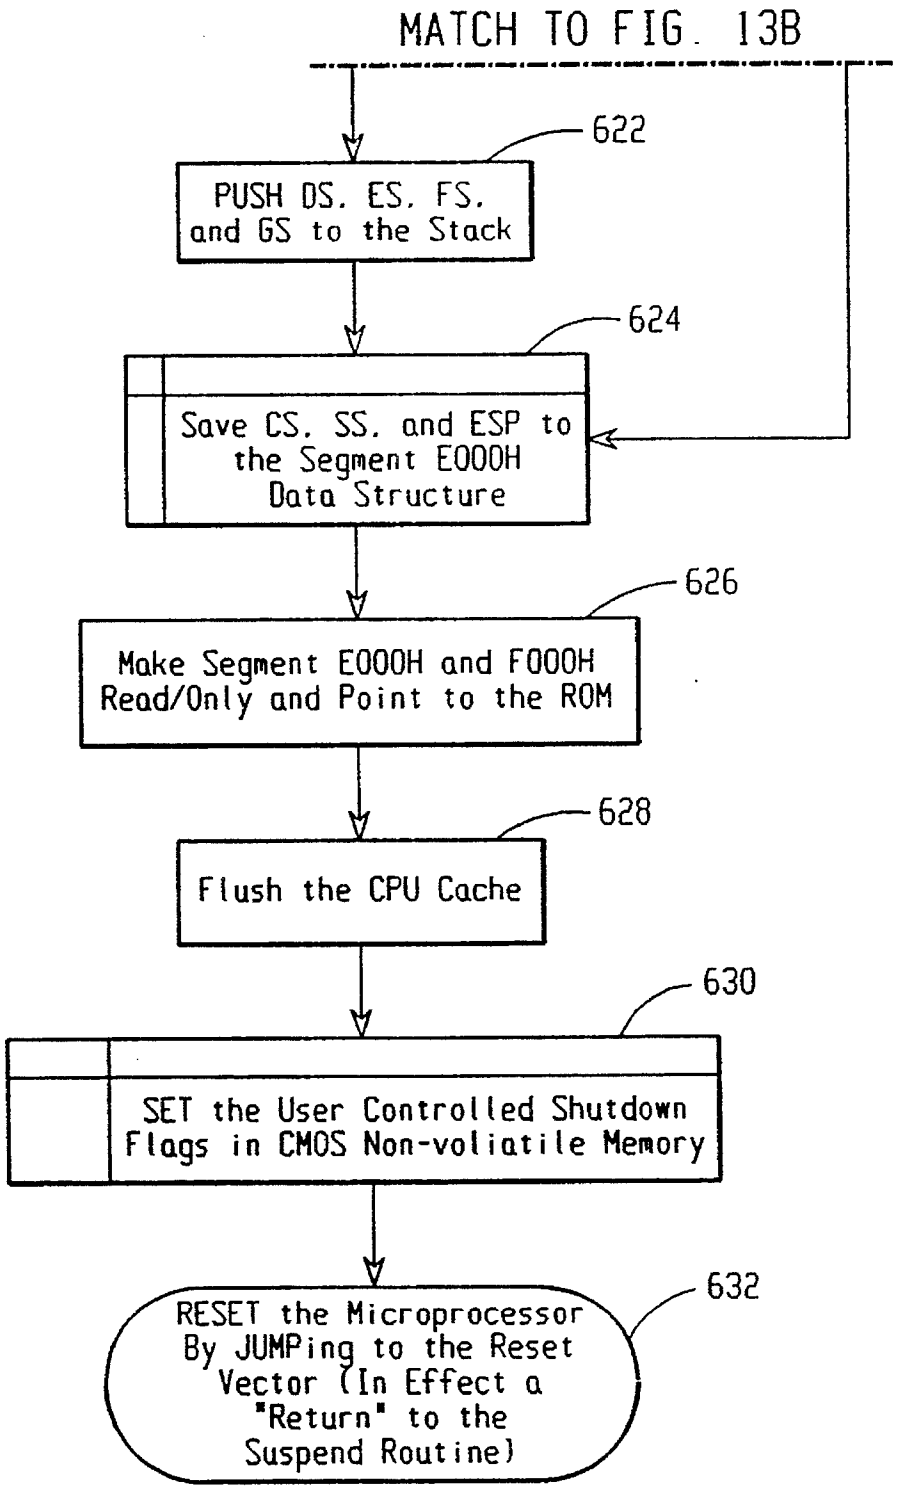

MATCH TO FIG. 13B
622
PUSH DS. ES. FS. and GS to the Stack
624
Save CS. SS. and ESP to the Segment E000H Data Structure
626
Make Segment E000H and F000H Read/Only and Point to the ROM
628
Flush the CPU Cache
630
SET the User Controlled Shutdown Flags in CMOS Non-voliatile Memory
632
RESET the Microprocessor By JUMPing to the Reset Vector (In Effect a "Return" to the Suspend Routine)

FIG. 13C

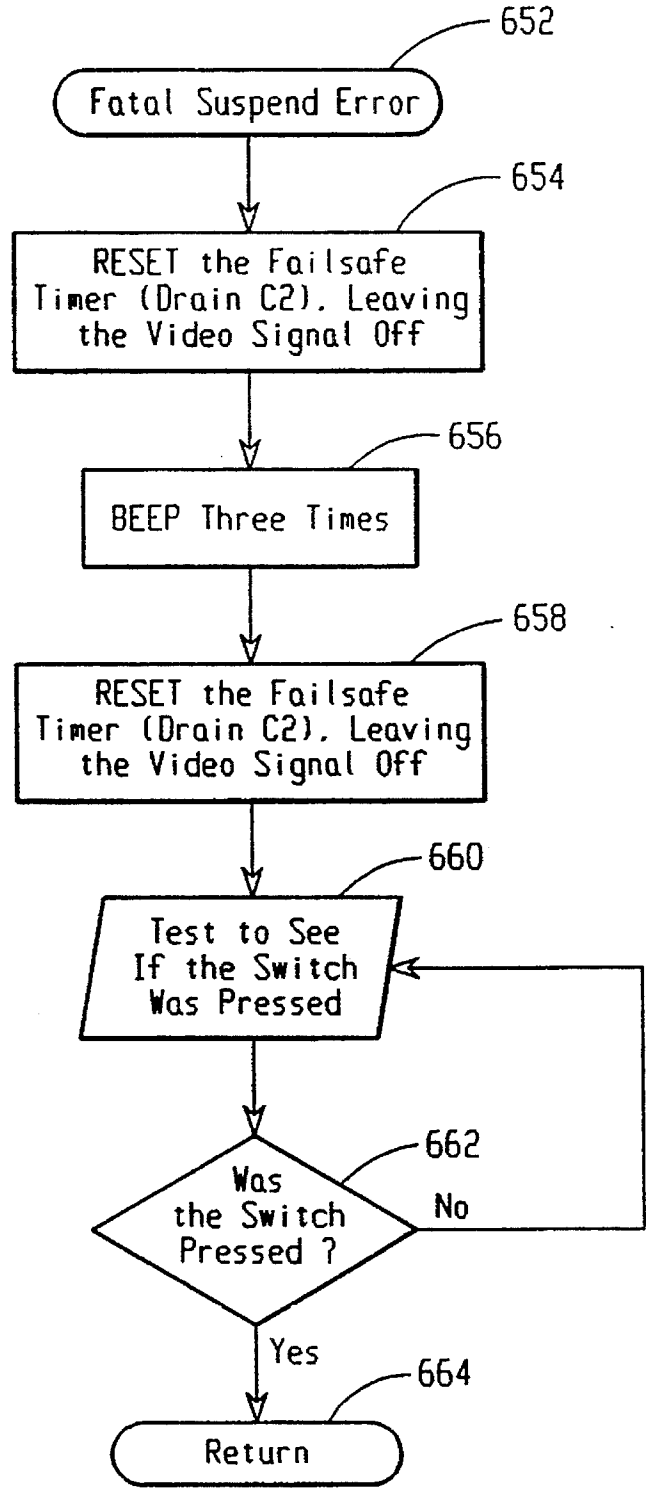

652
Fatal Suspend Error
654
RESET the Failsafe Timer (Drain C2), Leaving the Video Signal Off
656
BEEP Three Times
658
RESET the Failsafe Timer (Drain C2), Leaving the Video Signal Off
660
Test to See If the Switch Was Pressed
662
Was the Switch Pressed ?
No
Yes
664
Return

FIG. 13D

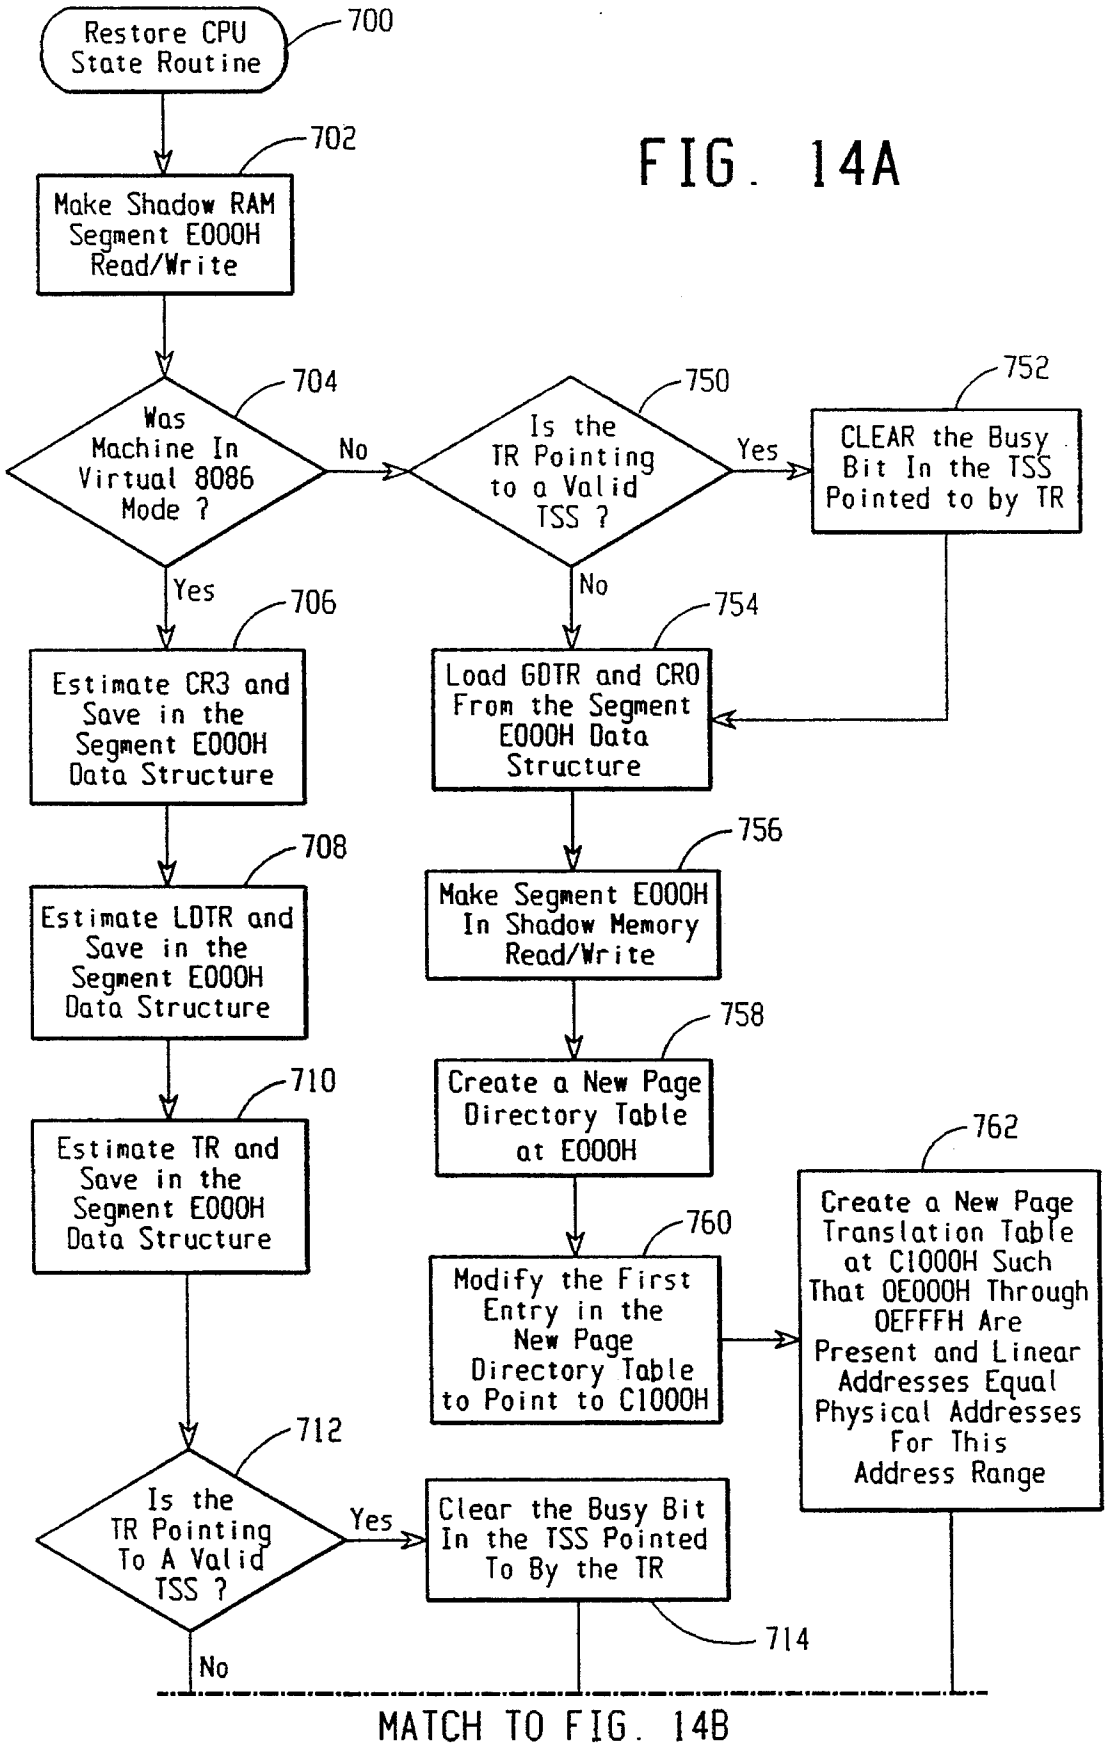

Restore CPU State Routine
700
Make Shadow RAM Segment E000H Read/Write
702
Was Machine In Virtual 8086 Mode ?
704
No
Yes
Is the TR Pointing to a Valid TSS ?
750
Yes
CLEAR the Busy Bit In the TSS Pointed to by TR
752
No
Estimate CR3 and Save in the Segment E000H Data Structure
706
Load GDTR and CR0 From the Segment E000H Data Structure
754
Estimate LDTR and Save in the Segment E000H Data Structure
708
Make Segment E000H In Shadow Memory Read/Write
756
Estimate TR and Save in the Segment E000H Data Structure
710
Create a New Page Directory Table at E000H
758
Modify the First Entry in the New Page Directory Table to Point to C1000H
760
Create a New Page Translation Table at C1000H Such That 0E000H Through 0EFFFH Are Present and Linear Addresses Equal Physical Addresses For This Address Range
762
Is the TR Pointing To A Valid TSS ?
712
Yes
Clear the Busy Bit In the TSS Pointed To By the TR
714
No
MATCH TO FIG. 14B

FIG. 14A

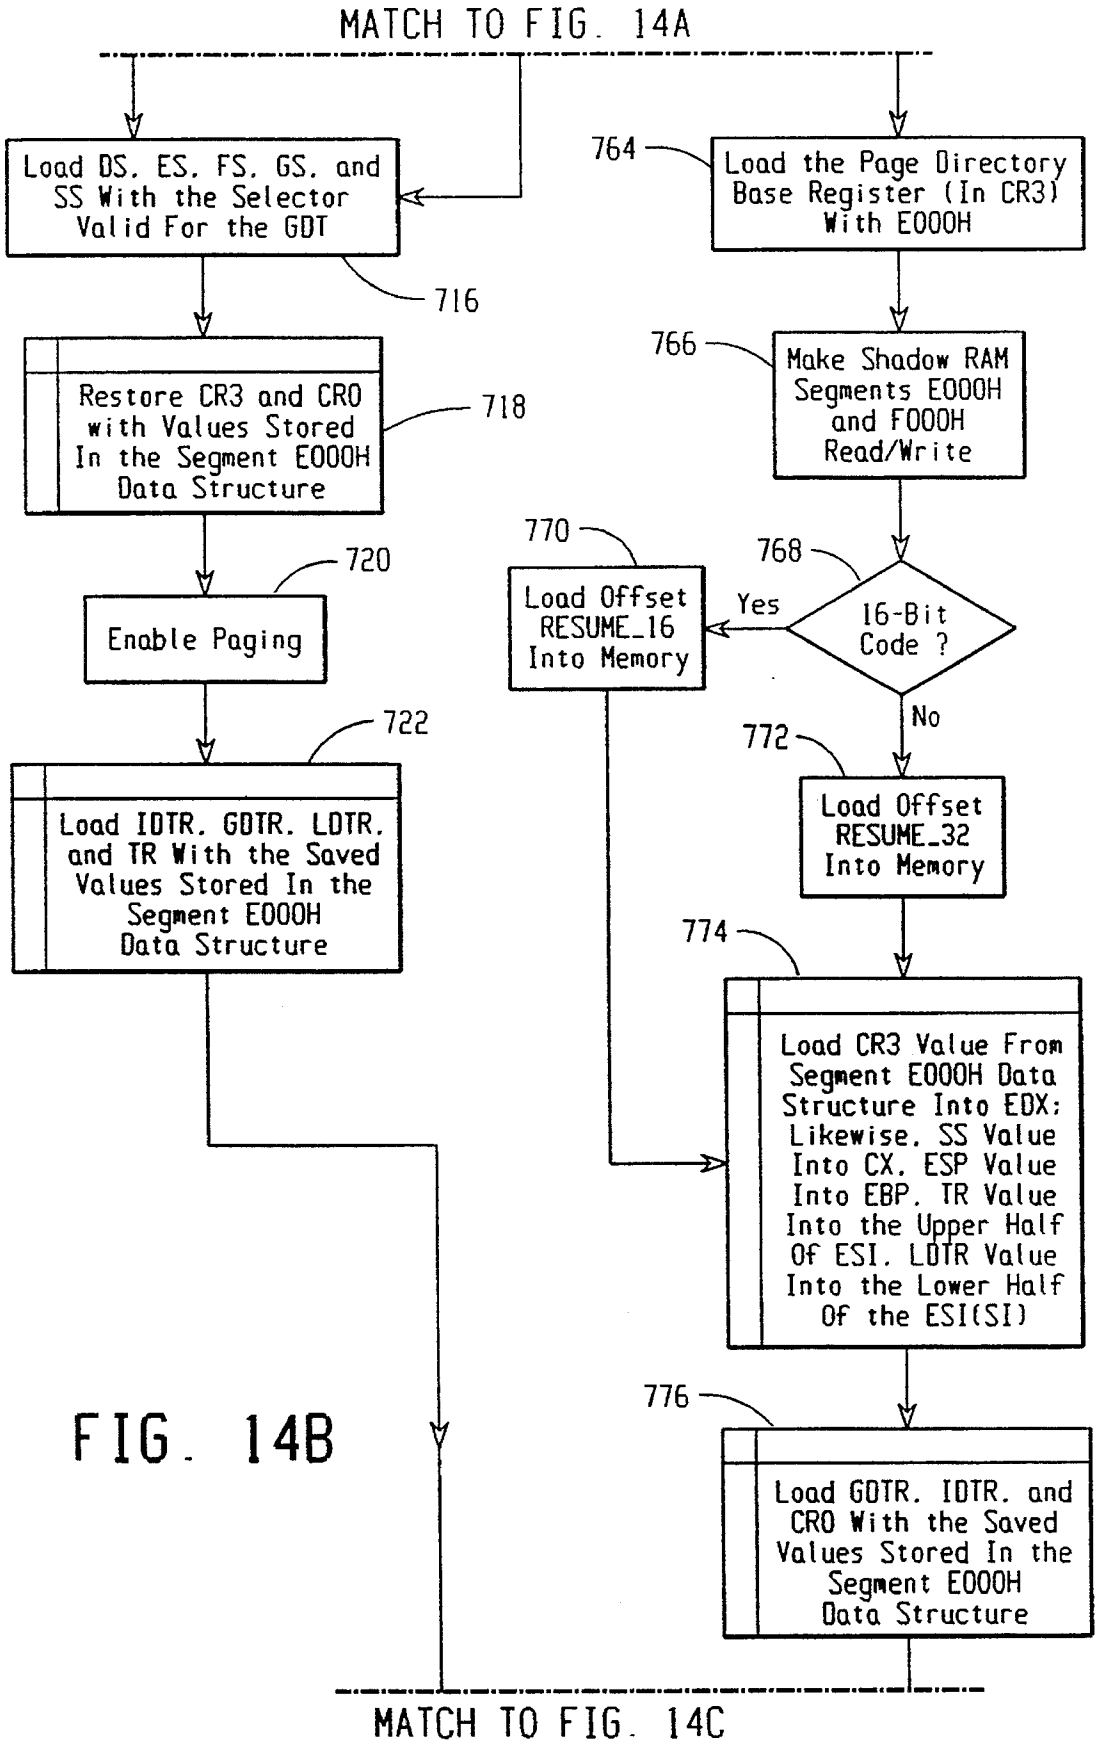

MATCH TO FIG. 14A
Load DS. ES. FS. GS. and SS With the Selector Valid For the GDT
716
Restore CR3 and CR0 with Values Stored In the Segment E000H Data Structure
718
720
Enable Paging
722
Load IDTR. GDTR. LDTR. and TR With the Saved Values Stored In the Segment E000H Data Structure
764
Load the Page Directory Base Register (In CR3) With E000H
766
Make Shadow RAM Segments E000H and F000H Read/Write
768
16-Bit Code ?
Yes
770
Load Offset RESUME_16 Into Memory
No
772
Load Offset RESUME_32 Into Memory
774
Load CR3 Value From Segment E000H Data Structure Into EDX; Likewise. SS Value Into CX. ESP Value Into EBP. TR Value Into the Upper Half Of ESI. LDTR Value Into the Lower Half Of the ESI(SI)
776
Load GDTR. IDTR. and CR0 With the Saved Values Stored In the Segment E000H Data Structure
MATCH TO FIG. 14C

FIG. 14B

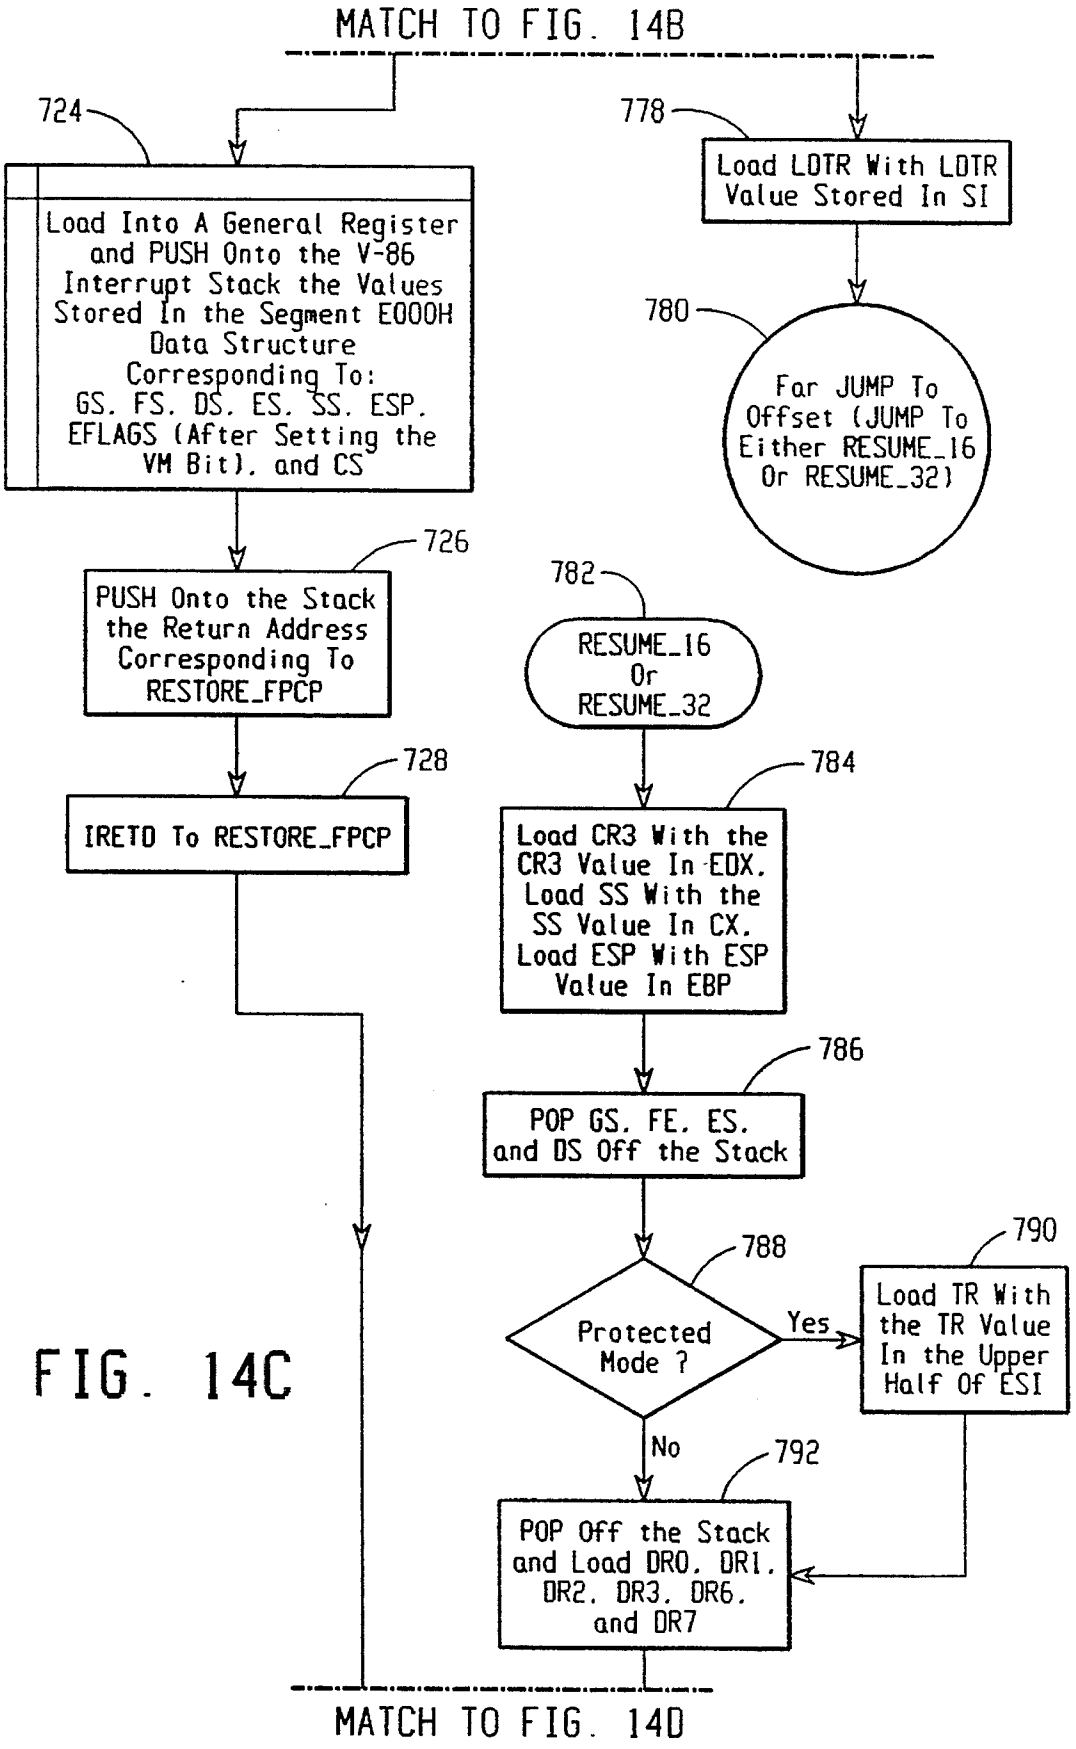

MATCH TO FIG. 14B
724
Load Into A General Register and PUSH Onto the V-86 Interrupt Stack the Values Stored In the Segment E000H Data Structure Corresponding To: GS. FS. DS. ES. SS. ESP. EFLAGS (After Setting the VM Bit). and CS
726
PUSH Onto the Stack the Return Address Corresponding To RESTORE_FPCP
728
IRETD To RESTORE_FPCP
778
Load LDTR With LDTR Value Stored In SI
780
Far JUMP To Offset (JUMP To Either RESUME_16 Or RESUME_32)
782
RESUME_16 Or RESUME_32
784
Load CR3 With the CR3 Value In EDX. Load SS With the SS Value In CX. Load ESP With ESP Value In EBP
786
POP GS. FE. ES. and DS Off the Stack
788
Protected Mode ?
Yes
790
Load TR With the TR Value In the Upper Half Of ESI
No
792
POP Off the Stack and Load DR0. DR1. DR2. DR3. DR6. and DR7
MATCH TO FIG. 14D

FIG. 14C

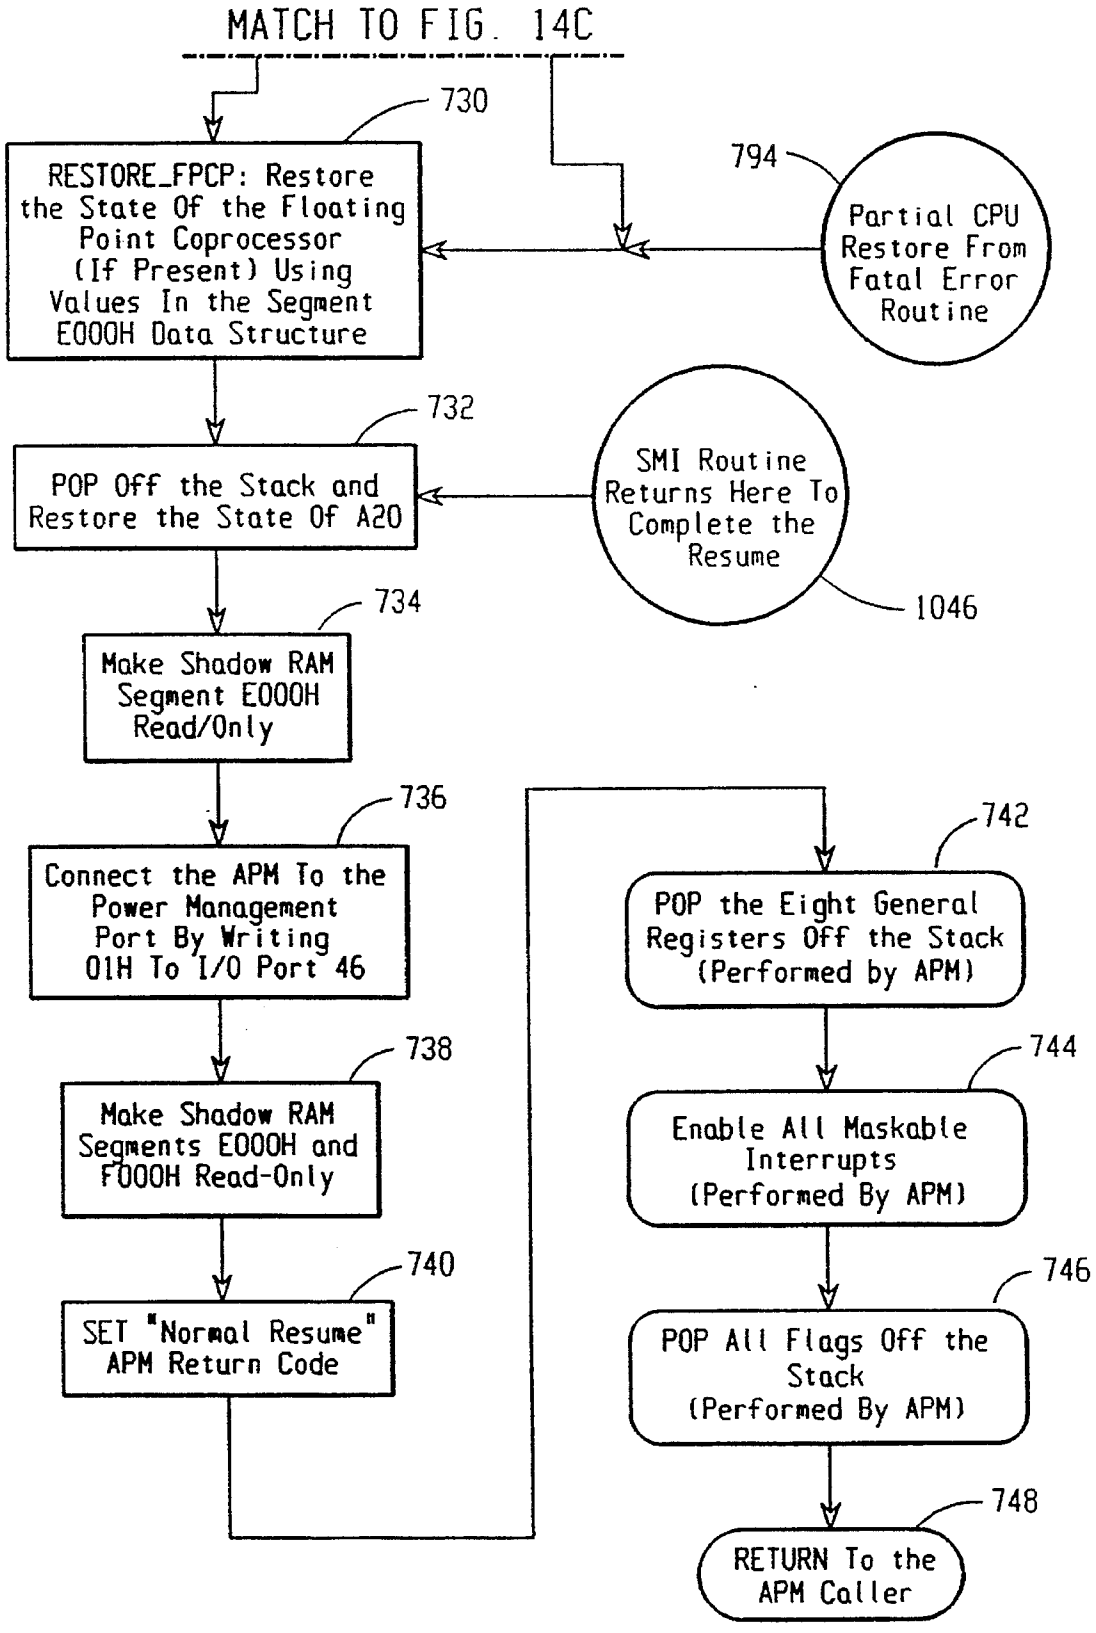

MATCH TO FIG. 14C
730
RESTORE_FPCP: Restore the State Of the Floating Point Coprocessor (If Present) Using Values In the Segment E000H Data Structure
794
Partial CPU Restore From Fatal Error Routine
732
POP Off the Stack and Restore the State Of A20
SMI Routine Returns Here To Complete the Resume
1046
734
Make Shadow RAM Segment E000H Read/Only
736
Connect the APM To the Power Management Port By Writing 01H To I/O Port 46
738
Make Shadow RAM Segments E000H and F000H Read-Only
740
SET "Normal Resume" APM Return Code
742
POP the Eight General Registers Off the Stack (Performed by APM)
744
Enable All Maskable Interrupts (Performed By APM)
746
POP All Flags Off the Stack (Performed By APM)
748
RETURN To the APM Caller

FIG. 14D

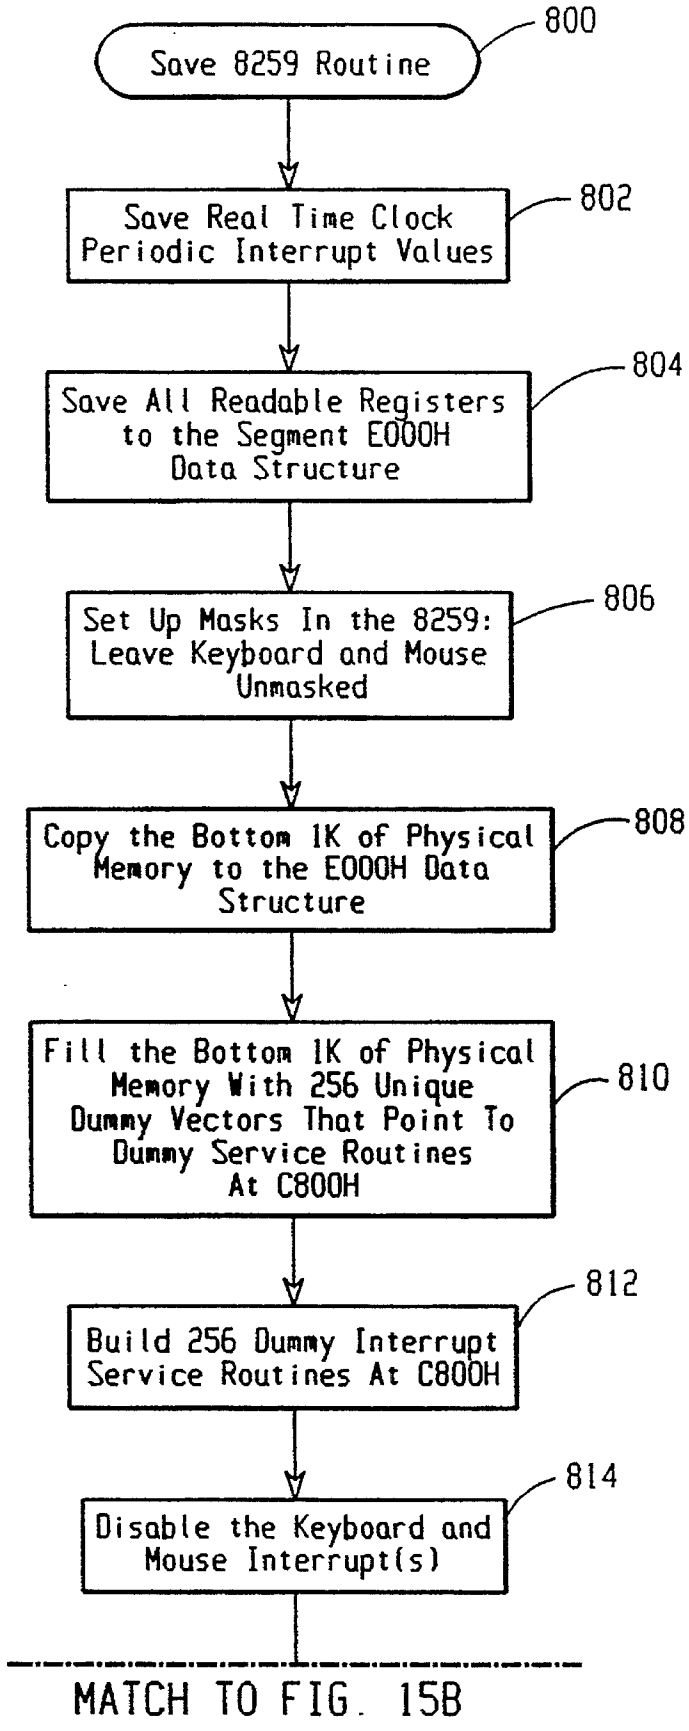

800
Save 8259 Routine
802
Save Real Time Clock Periodic Interrupt Values
804
Save All Readable Registers to the Segment E000H Data Structure
806
Set Up Masks In the 8259: Leave Keyboard and Mouse Unmasked
808
Copy the Bottom 1K of Physical Memory to the E000H Data Structure
810
Fill the Bottom 1K of Physical Memory With 256 Unique Dummy Vectors That Point To Dummy Service Routines At C800H
812
Build 256 Dummy Interrupt Service Routines At C800H
814
Disable the Keyboard and Mouse Interrupt(s)
MATCH TO FIG. 15B

FIG. 15A

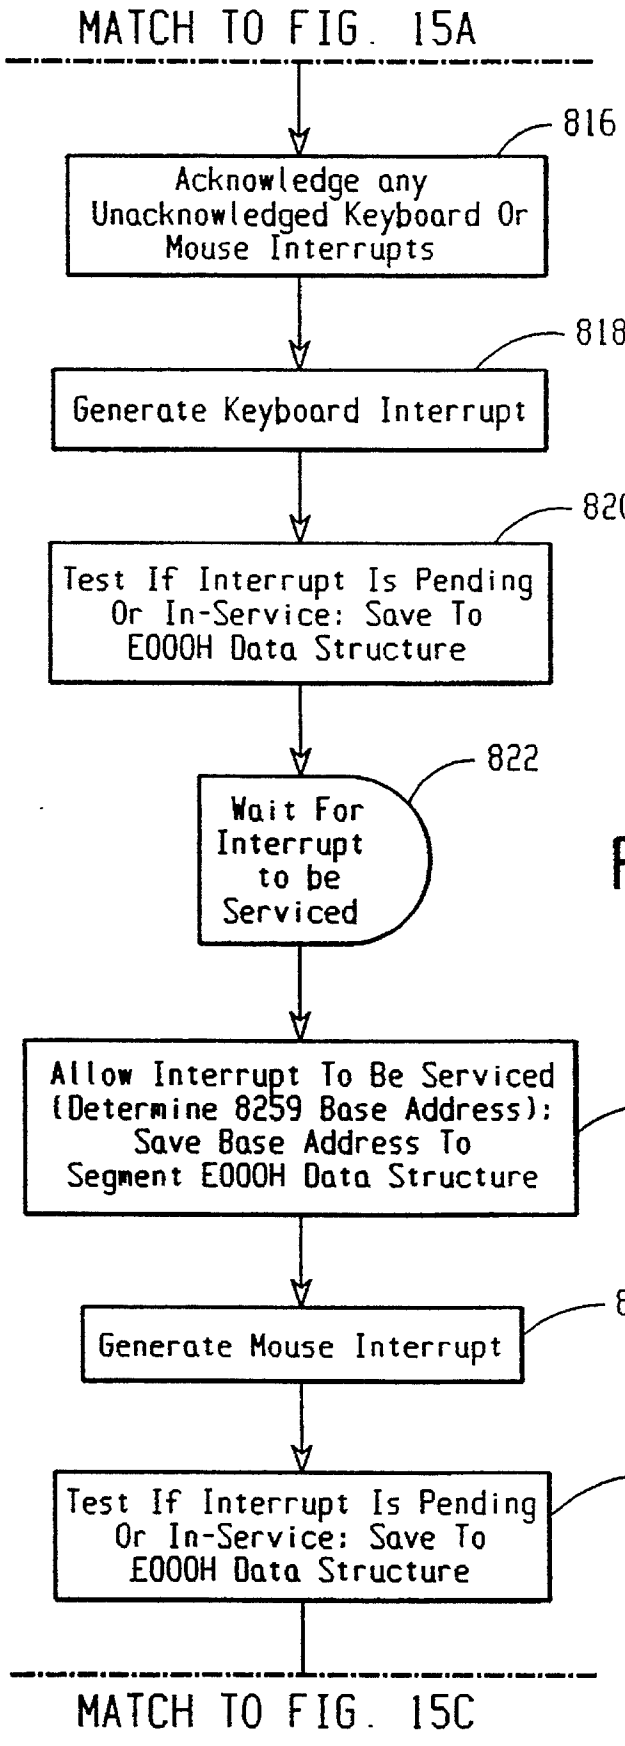

MATCH TO FIG. 15A
816
Acknowledge any Unacknowledged Keyboard Or Mouse Interrupts
818
Generate Keyboard Interrupt
820
Test If Interrupt Is Pending Or In-Service: Save To E000H Data Structure
822
Wait For Interrupt to be Serviced
Allow Interrupt To Be Serviced (Determine 8259 Base Address): Save Base Address To Segment E000H Data Structure
824
Generate Mouse Interrupt
826
Test If Interrupt Is Pending Or In-Service: Save To E000H Data Structure
828
MATCH TO FIG. 15C

FIG. 15B

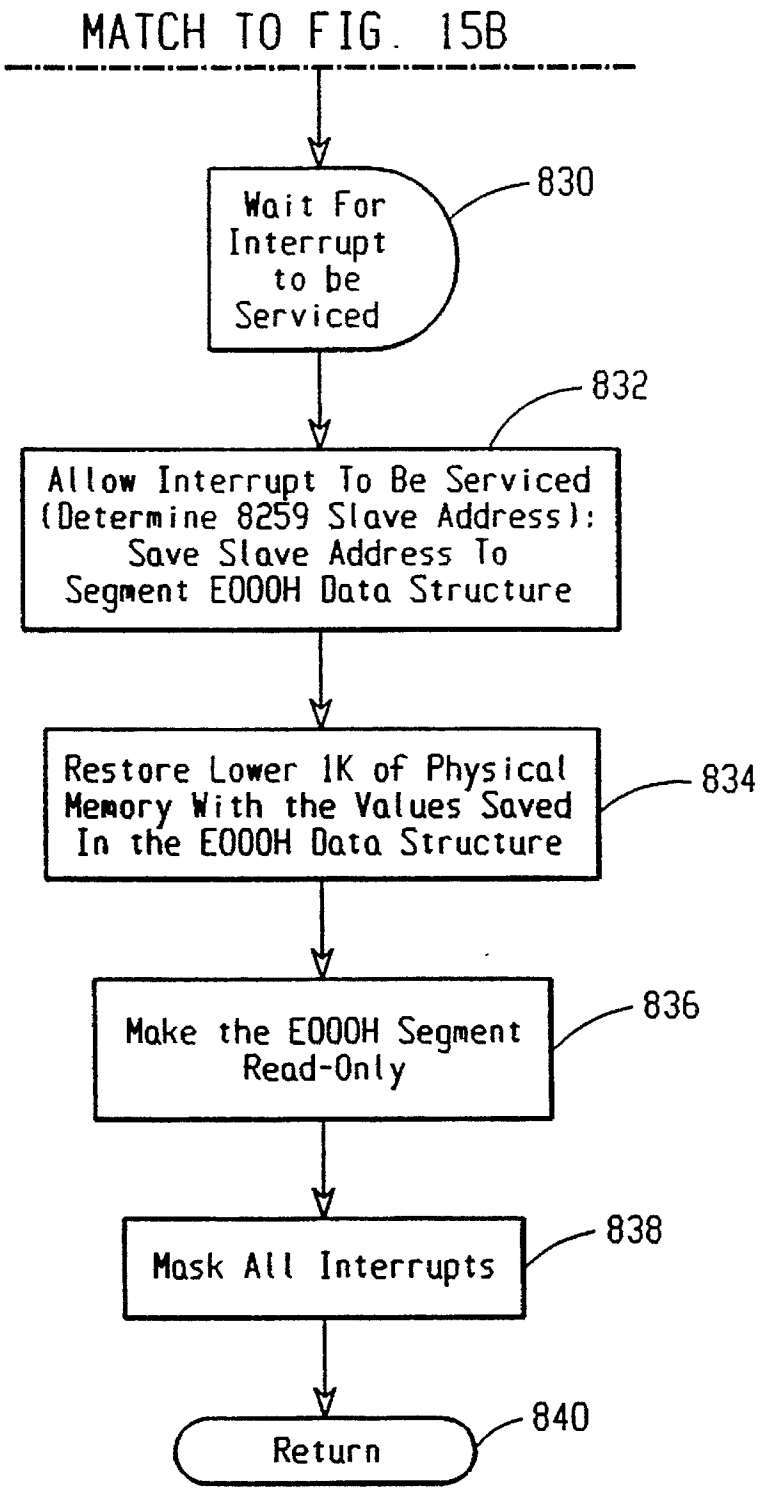
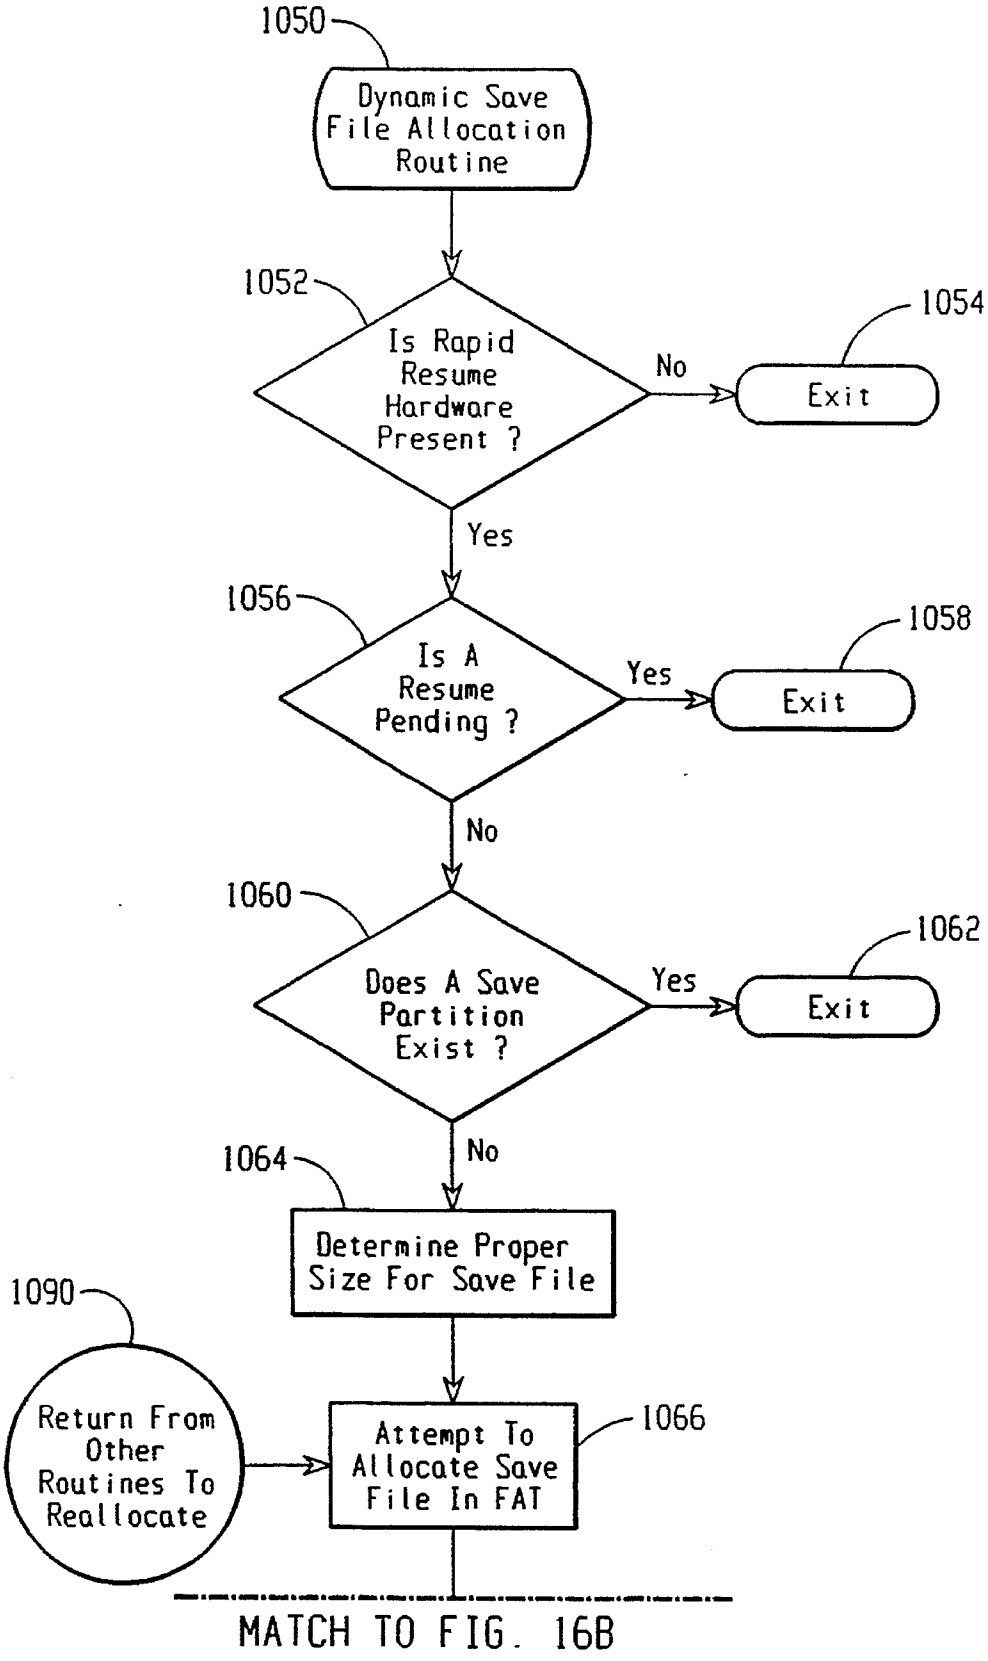

MATCH TO FIG. 15B
Wait For Interrupt to be Serviced
830
Allow Interrupt To Be Serviced (Determine 8259 Slave Address): Save Slave Address To Segment E000H Data Structure
832
Restore Lower 1K of Physical Memory With the Values Saved In the E000H Data Structure
834
Make the E000H Segment Read-Only
836
Mask All Interrupts
838
Return
840

FIG. 15C

FIG. 16A


1050
Dynamic Save File Allocation Routine
1052
Is Rapid Resume Hardware Present ?
No
1054
Exit
Yes
1056
Is A Resume Pending ?
Yes
1058
Exit
No
1060
Does A Save Partition Exist ?
Yes
1062
Exit
No
1064
Determine Proper Size For Save File
1090
Return From Other Routines To Reallocate
Attempt To Allocate Save File In FAT
1066
MATCH TO FIG. 16B

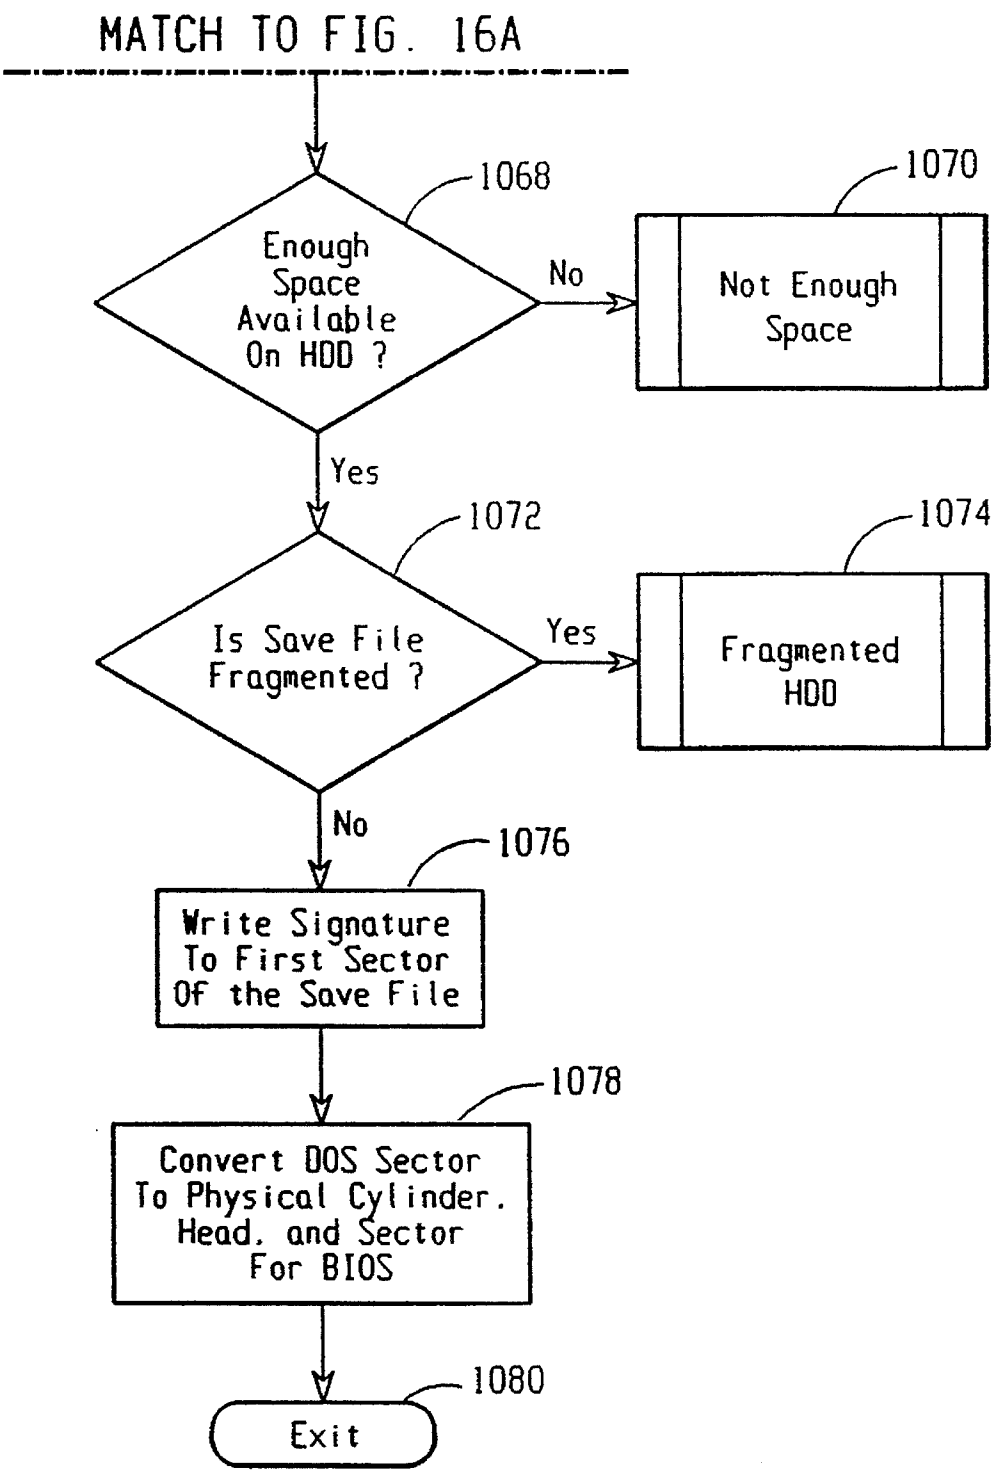

MATCH TO FIG. 16A
1068
Enough Space Available On HDD ?
No
1070
Not Enough Space
Yes
1072
Is Save File Fragmented ?
Yes
1074
Fragmented HDD
No
1076
Write Signature To First Sector Of the Save File
1078
Convert DOS Sector To Physical Cylinder, Head, and Sector For BIOS
1080
Exit

FIG. 16B

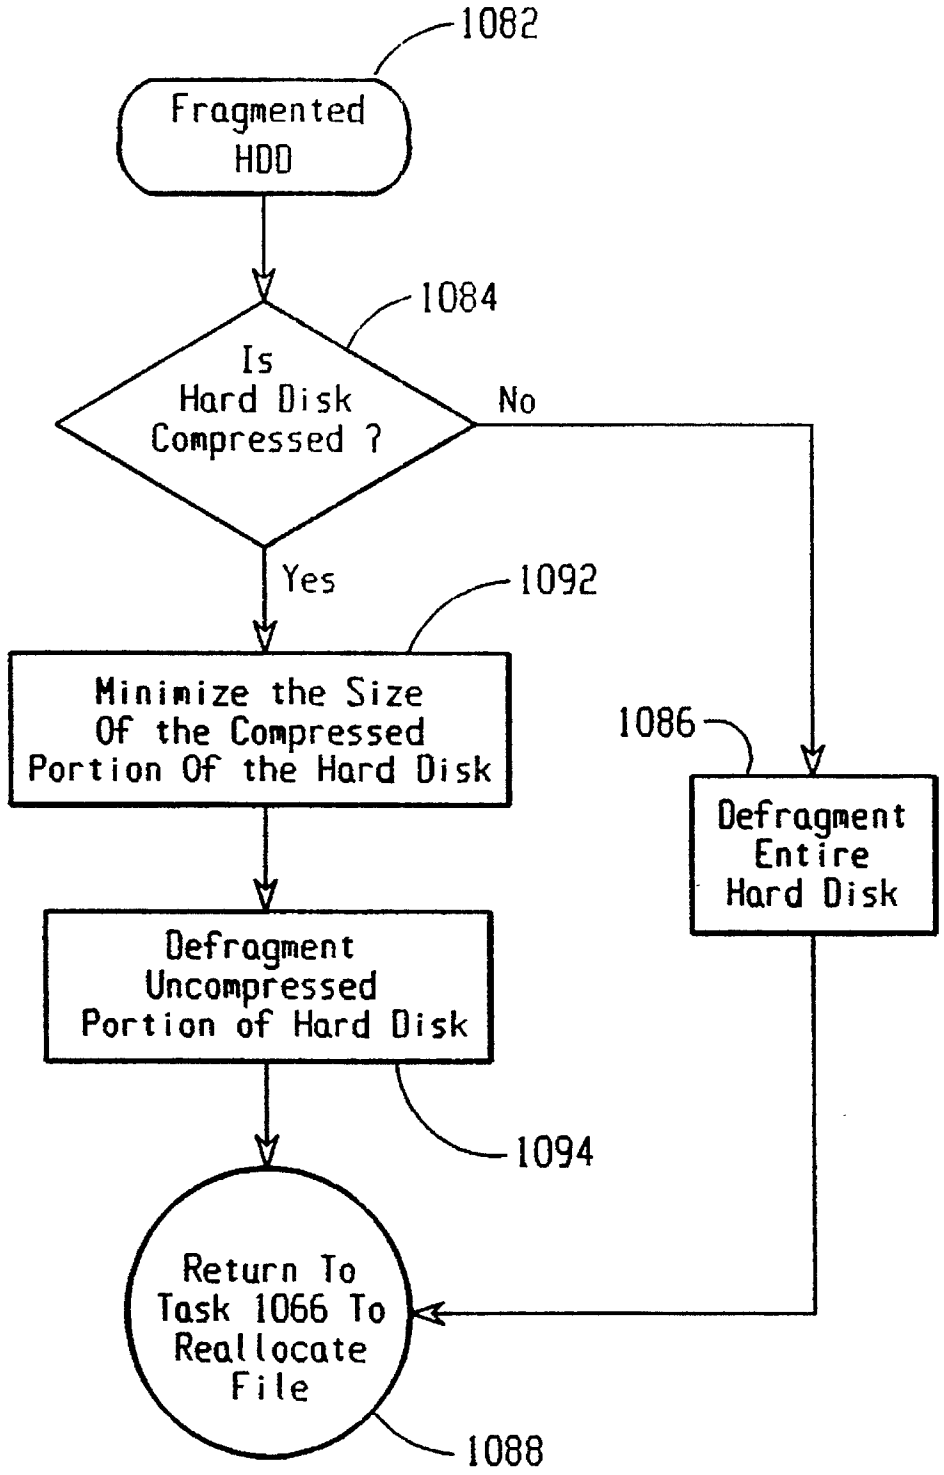

1082
Fragmented HDD
1084
Is Hard Disk Compressed ?
No
Yes
1092
Minimize the Size Of the Compressed Portion Of the Hard Disk
1086
Defragment Entire Hard Disk
Defragment Uncompressed Portion of Hard Disk
1094
Return To Task 1066 To Reallocate File
1088

FIG. 16C

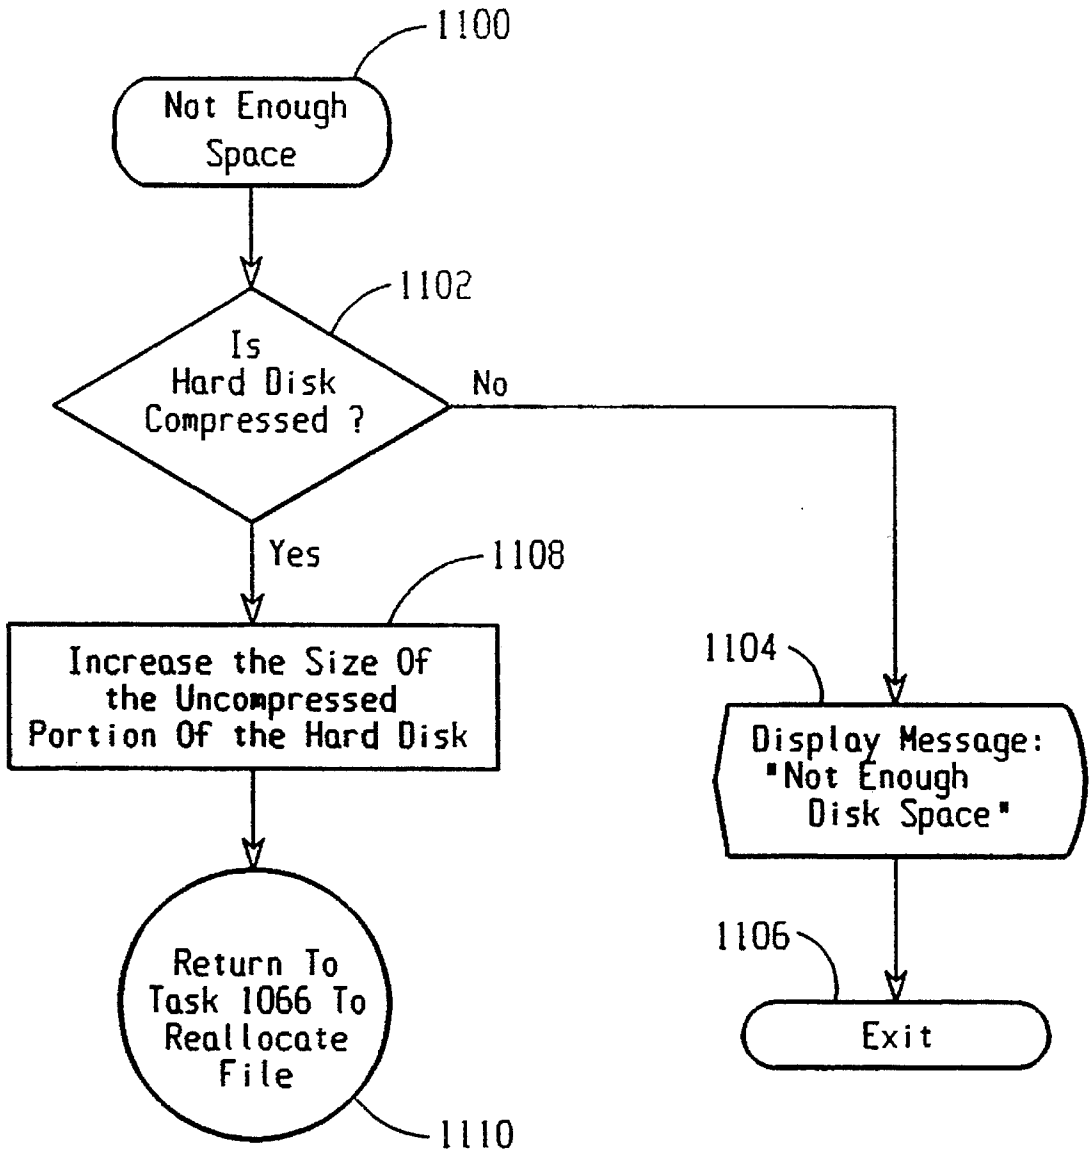

1100
Not Enough Space
1102
Is Hard Disk Compressed ?
No
Yes
1108
Increase the Size Of the Uncompressed Portion Of the Hard Disk
1104
Display Message: "Not Enough Disk Space"
1106
Exit
Return To Task 1066 To Reallocate File
1110

FIG. 16D

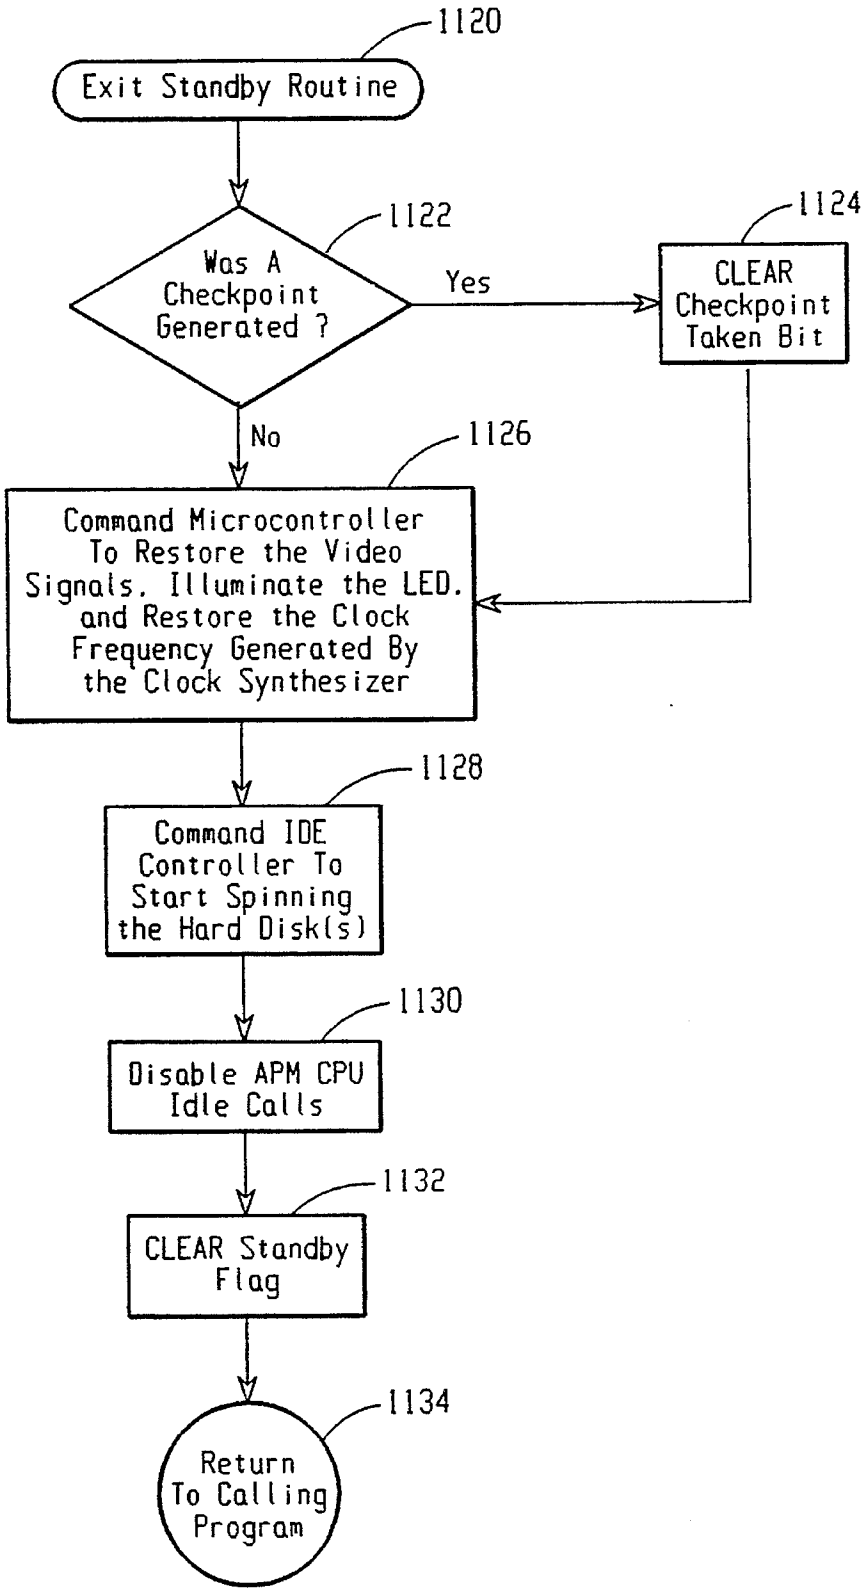

1120
Exit Standby Routine
1122
Was A Checkpoint Generated ?
Yes
1124
CLEAR Checkpoint Taken Bit
No
1126
Command Microcontroller To Restore the Video Signals, Illuminate the LED, and Restore the Clock Frequency Generated By the Clock Synthesizer
1128
Command IDE Controller To Start Spinning the Hard Disk(s)
1130
Disable APM CPU Idle Calls
1132
CLEAR Standby Flag
1134
Return To Calling Program

FIG. 17

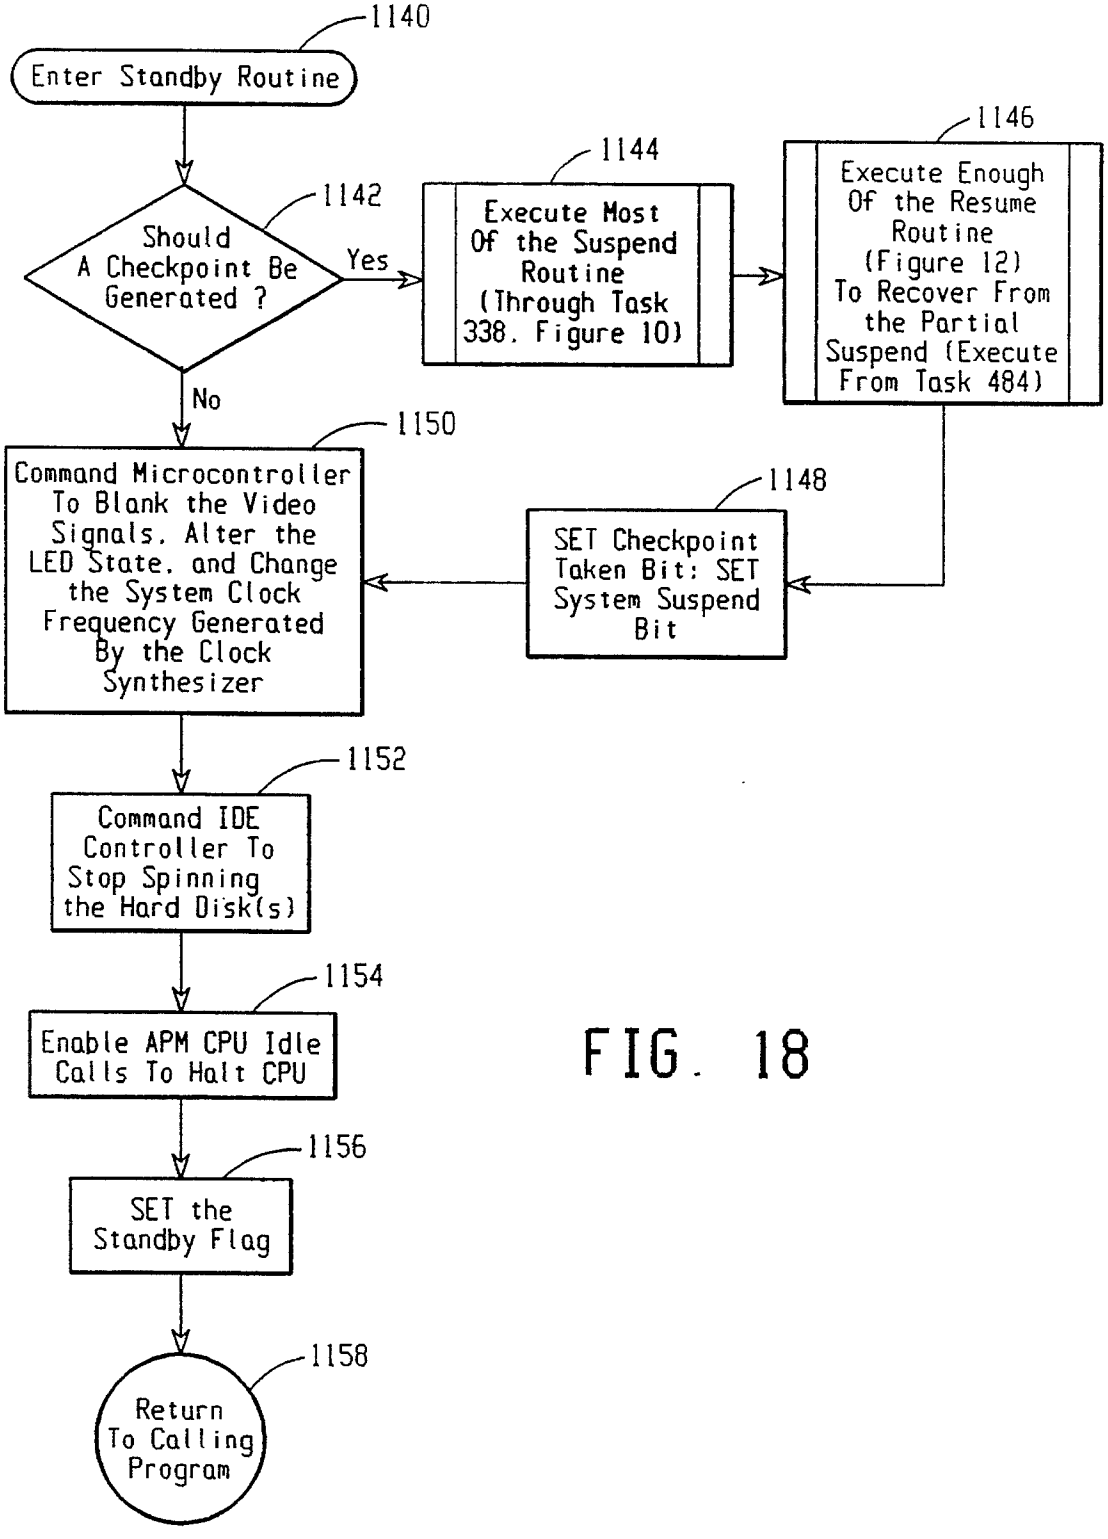

1140
Enter Standby Routine
1142
Should A Checkpoint Be Generated ?
Yes
No
1144
Execute Most Of the Suspend Routine (Through Task 338. Figure 10)
1146
Execute Enough Of the Resume Routine (Figure 12) To Recover From the Partial Suspend (Execute From Task 484)
1148
SET Checkpoint Taken Bit: SET System Suspend Bit
1150
Command Microcontroller To Blank the Video Signals. Alter the LED State. and Change the System Clock Frequency Generated By the Clock Synthesizer
1152
Command IDE Controller To Stop Spinning the Hard Disk(s)
1154
Enable APM CPU Idle Calls To Halt CPU
1156
SET the Standby Flag
1158
Return To Calling Program

FIG. 18

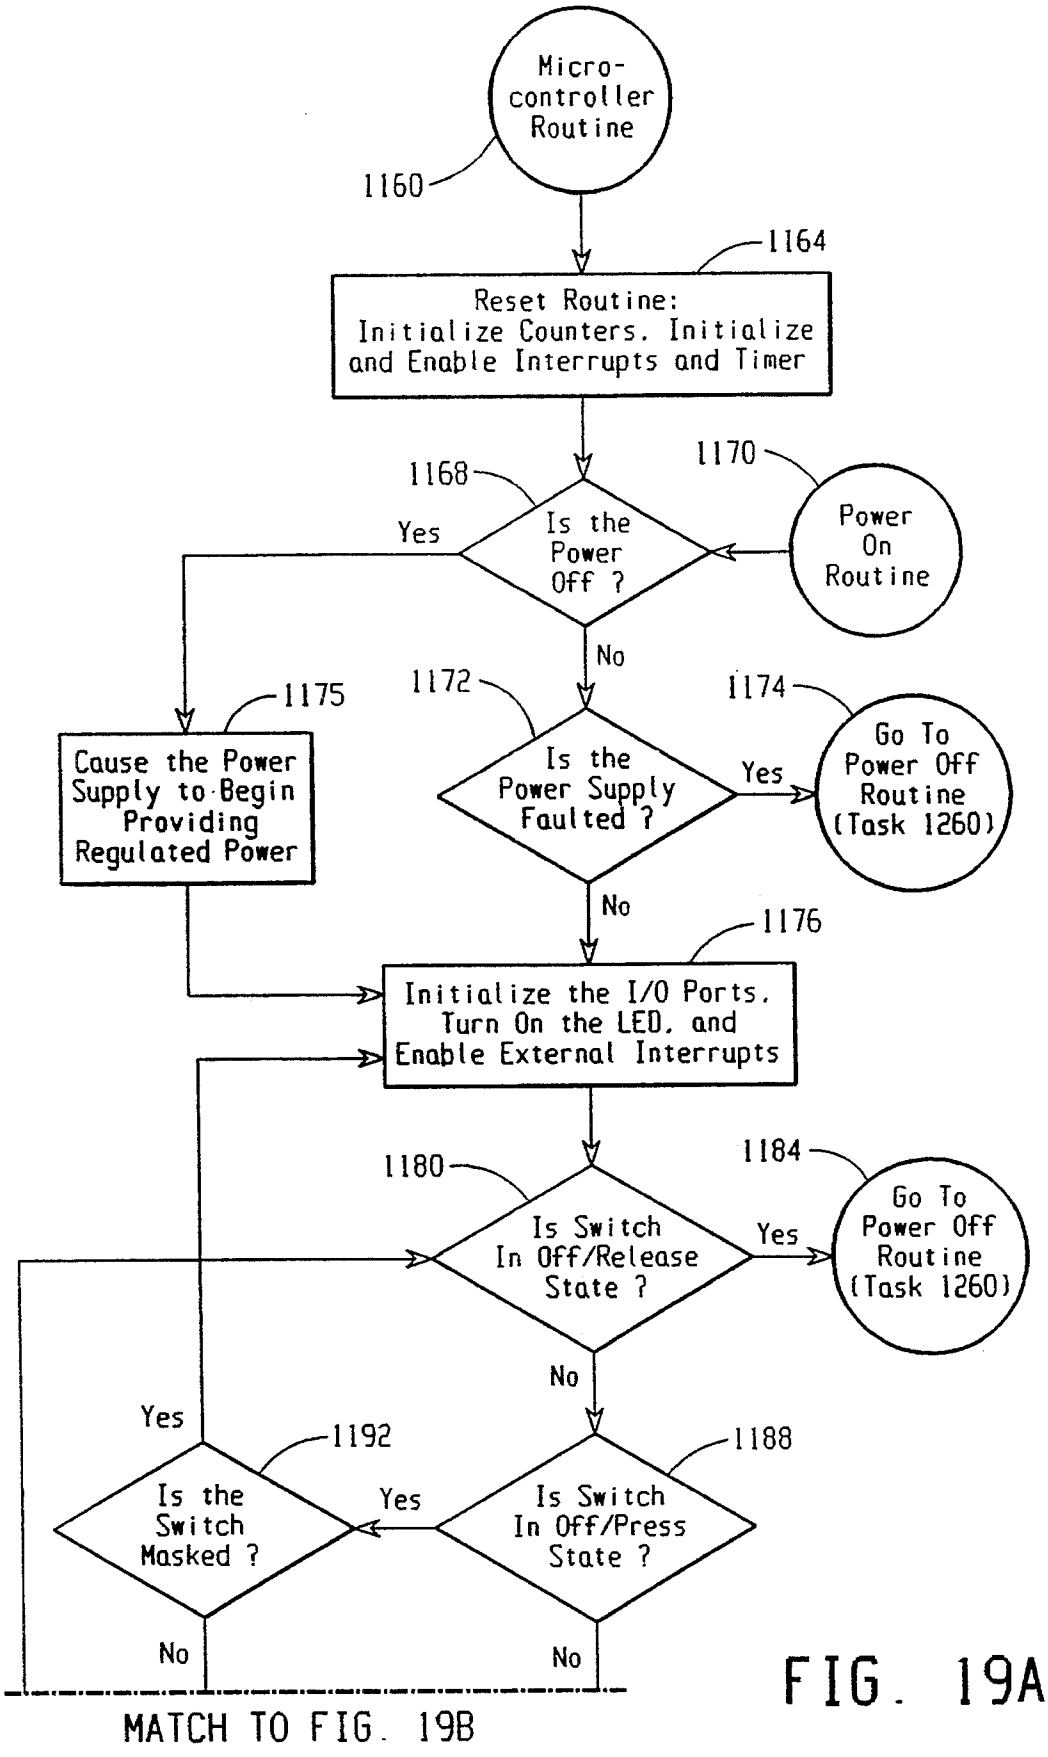

Micro-controller Routine
1160
1164
Reset Routine: Initialize Counters. Initialize and Enable Interrupts and Timer
1168
Is the Power Off ?
Yes
1170
Power On Routine
No
1172
Is the Power Supply Faulted ?
Yes
1174
Go To Power Off Routine (Task 1260)
No
1175
Cause the Power Supply to Begin Providing Regulated Power
1176
Initialize the I/O Ports. Turn On the LED. and Enable External Interrupts
1180
Is Switch In Off/Release State ?
Yes
1184
Go To Power Off Routine (Task 1260)
No
Yes
1192
Is the Switch Masked ?
Yes
1188
Is Switch In Off/Press State ?
No
No
MATCH TO FIG. 19B

FIG. 19A

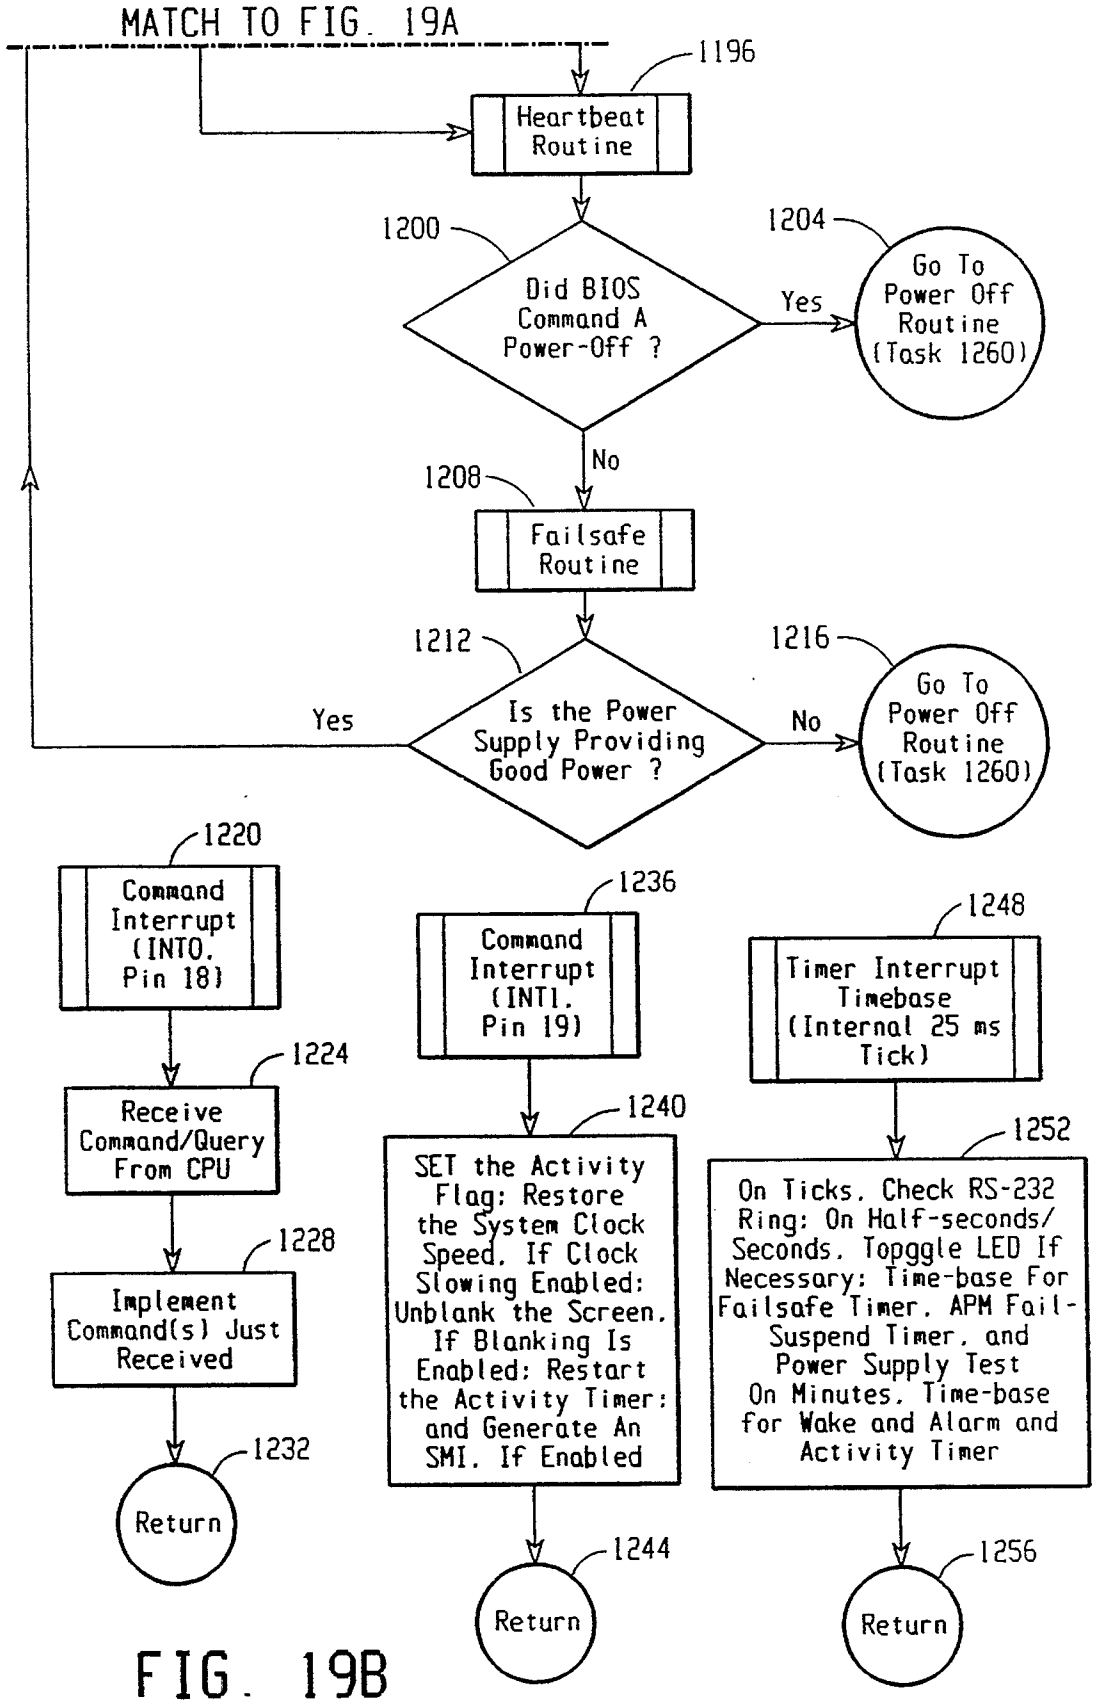
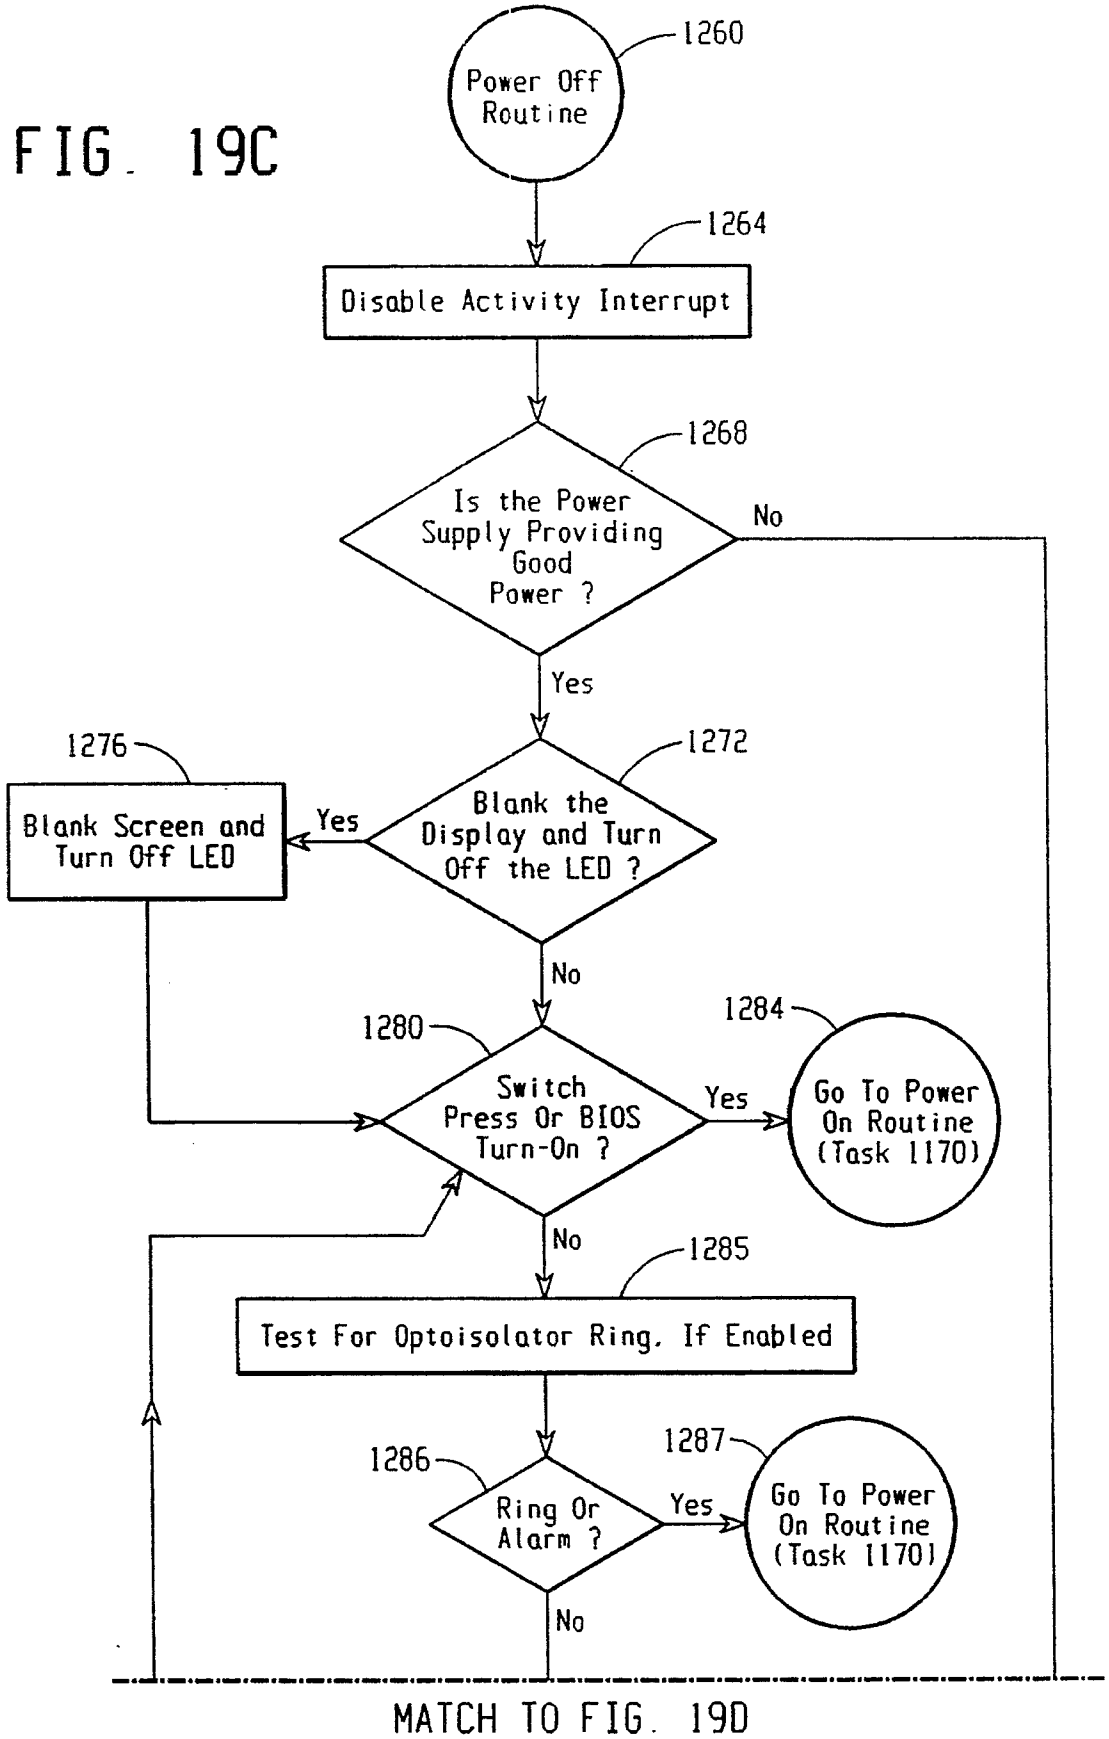

MATCH TO FIG. 19A
1196
Heartbeat Routine
1200
Did BIOS Command A Power-Off ?
Yes
1204
Go To Power Off Routine (Task 1260)
No
1208
Failsafe Routine
1212
Is the Power Supply Providing Good Power ?
Yes
No
1216
Go To Power Off Routine (Task 1260)
1220
Command Interrupt (INT0, Pin 18)
1224
Receive Command/Query From CPU
1228
Implement Command(s) Just Received
1232
Return
1236
Command Interrupt (INT1, Pin 19)
1240
SET the Activity Flag: Restore the System Clock Speed, If Clock Slowing Enabled: Unblank the Screen, If Blanking Is Enabled: Restart the Activity Timer: and Generate An SMI, If Enabled
1244
Return
1248
Timer Interrupt Timebase (Internal 25 ms Tick)
1252
On Ticks, Check RS-232 Ring: On Half-seconds/ Seconds, Topggle LED If Necessary: Time-base For Failsafe Timer, APM Fail-Suspend Timer, and Power Supply Test On Minutes, Time-base for Wake and Alarm and Activity Timer
1256
Return

FIG. 19B

FIG. 19C


1260
Power Off Routine
1264
Disable Activity Interrupt
1268
Is the Power Supply Providing Good Power ?
No
Yes
1272
Blank the Display and Turn Off the LED ?
Yes
1276
Blank Screen and Turn Off LED
No
1280
Switch Press Or BIOS Turn-On ?
Yes
1284
Go To Power On Routine (Task 1170)
No
1285
Test For Optoisolator Ring, If Enabled
1286
Ring Or Alarm ?
Yes
1287
Go To Power On Routine (Task 1170)
No
MATCH TO FIG. 19D

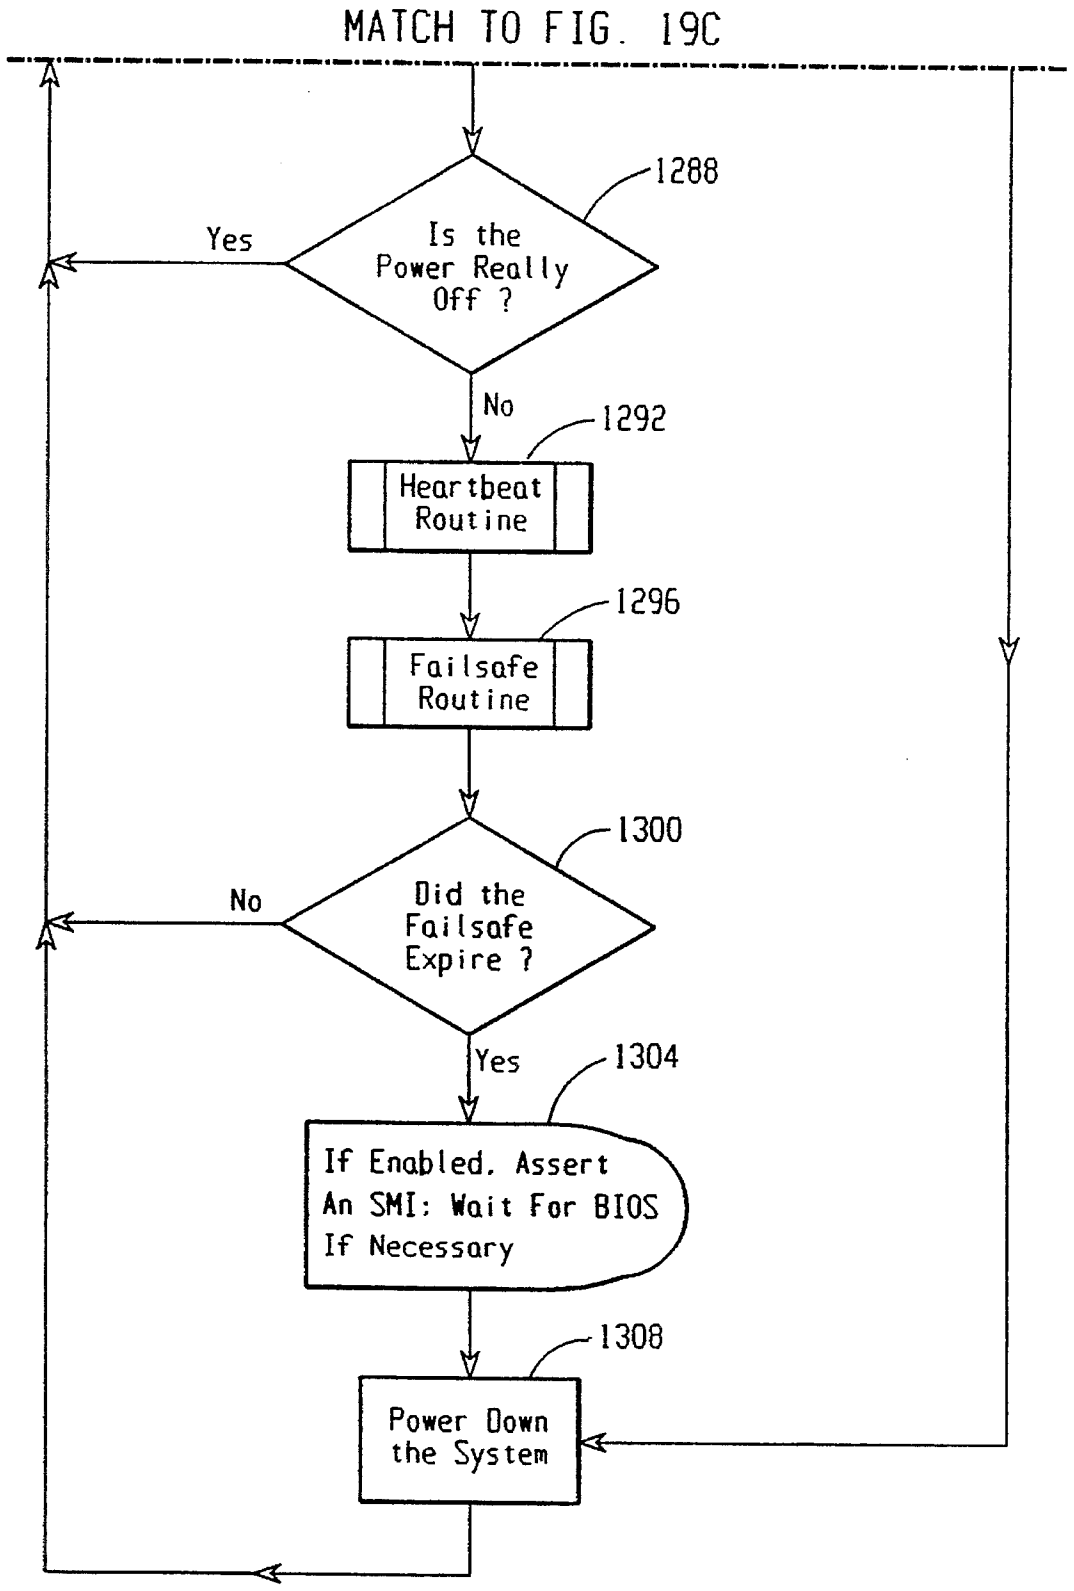

MATCH TO FIG. 19C
1288
Is the Power Really Off ?
Yes
No
1292
Heartbeat Routine
1296
Failsafe Routine
1300
Did the Failsafe Expire ?
No
Yes
1304
If Enabled, Assert An SMI: Wait For BIOS If Necessary
1308
Power Down the System

FIG. 19D

COMPUTER SYSTEM HAVING POWER MANAGEMENT PROCESSOR FOR SWITCHING POWER SUPPLY FROM ONE STATE TO ANOTHER RESPONSIVE TO A CLOSURE OF A SWITCH, A DETECTED RING OR AN EXPIRATION OF A TIMER

RELATED APPLICATIONS

The present invention is believed to be related to the following pending applications:

Application Ser. No. 08/097,334, filed Jul. 23, 1993, and entitled "DESKTOP COMPUTER HAVING A SINGLE SWITCH SUSPEND/RESUME FUNCTION" (further identified as Attorney Docket No. BC9-93-018 (21322/00158));

Application Ser. No. 08/472,207, filed Jun. 7, 1995, which is a continuation of application Ser. No. 08/097,250 (now abandoned), filed Jul. 26, 1993, and entitled "DESKTOP COMPUTER SYSTEM HAVING ZERO VOLT SYSTEM SUSPEND" (further identified as Attorney Docket No. BC9-93-016 (21322/00161));

Application Ser. No. 08/457,768, filed Jun. 1, 1995, which is a continuation of application Ser. No. 08/097,247 (now abandoned), filed Jul. 23, 1993, and entitled "METHOD OF SAVING AND RESTORING THE STATE OF A CPU EXECUTING CODE IN A PROTECTED MODE" (further identified as Attorney Docket No. BC9-93-017 (21322/00162));

Application Ser. No. 08/097,251, filed Jul. 26, 1993, and entitled "DESKTOP COMPUTER SYSTEM HAVING MULTI-LEVEL POWER MANAGEMENT" (further identified as Attorney Docket No. BC9-93-015 (21322/00163));

Application Ser. No. 08/303,102, filed Sep. 7, 1994, and entitled "AUTOMATIC CLEARING OF POWER SUPPLY FAULT CONDITION IN SUSPEND SYSTEM" (further identified as Attorney Docket No. BC9-94-043 (21322-00197));

Application Ser. No. 08/302,148, filed Sep. 7, 1994, and entitled "AUTOMATIC ALLOCATION OF SUSPEND FILE" (further identified as Attorney Docket No. BC9-94-044 (21322-00198));

Application Ser. No. 08/302,147, filed Sep. 7, 1994, and entitled "MULTIFUNCTION POWER SWITCH AND FEEDBACK LED FOR SUSPEND SYSTEMS" (further identified as Attorney Docket No. BC9-94-108 (21322-00202));

Application Ser. No. 08/302,157, filed Sep. 7, 1994, and entitled "LOW POWER RING DETECT FOR COMPUTER SYSTEM WAKEUP" (further identified as Attorney Docket No. BC9-94-110 (21322-00204));

Application Ser. No. 08/301,464, filed Sep. 7, 1994, and entitled "PERFORMING SYSTEM TASKS AT POWER-OFF USING SYSTEM MANAGEMENT INTERRUPT" (further identified as Attorney Docket No. BC9-94-112 (21322-00206));

Application Ser. No. 08/302,066, filed Sep. 7, 1994, and entitled "AUTOMATIC RESTORATION OF USER OPTIONS AFTER POWER LOSS" (further identified as Attorney Docket No. BC9-94-113 (21322-00207));

Application Ser. No. 08/303,103, filed Sep. 7, 1994, and entitled "STANDBY CHECKPOINT TO PREVENT DATA LOSS" (further identified as Attorney Docket No. BC9-94-114 (21322-00208)); and

Application Ser. No. 08/301,943, filed Sep. 7, 1994, and entitled "AUTOMATIC BACKUP SYSTEM FOR ADVANCED POWER MANAGEMENT (APM)" (further identified as Attorney Docket No. BC9-94-148).

FIELD OF THE INVENTION

The present invention relates generally to computer system architecture and, more specifically, to a desktop computer system having a system suspend/resume capability and a power management processor that facilitates transitions between the various power management states.

BACKGROUND OF THE INVENTION

Personal computer systems are well known in the art. Personal computer systems in general, and IBM Personal Computers in particular, have attained widespread use for providing computer power to many segments of today's modern society. Personal computers can typically be defined as a desktop, floor standing, or portable microcomputer that is comprised of a system unit having a single central processing unit (CPU) and associated volatile and non-volatile memory, including all RAM and BIOS ROM, a system monitor, a keyboard, one or more flexible diskette drives, a fixed disk storage drive (also known as a "hard drive"), a so-called "mouse" pointing device, and an optional printer. One of the distinguishing characteristics of these systems is the use of a motherboard or system planar to electrically connect these components together. These systems are designed primarily to give independent computing power to a single user and are inexpensively priced for purchase by individuals or small businesses. Examples of such personal computer systems are IBM's PERSONAL COMPUTER AT and IBM's PERSONAL SYSTEM/1 (IBM PS/1).

Personal computer systems are typically used to run software to perform such diverse activities as word processing, manipulation of data via spread-sheets, collection and relation of data in databases, displays of graphics, design of electrical or mechanical systems using system-design software, etc.

The first four related applications disclose a computer system having four power management states: a normal operating state, a standby state, a suspend state, and an off state. One switch is used to change between the off state, the normal operating state, and the suspend state.

The normal operating state of the computer system of the present invention is virtually identical to the normal operating state of any typical desktop computer. Users may use applications and basically treat the computer as any other. One difference is the presence of a power management driver, which runs in the background (in the BIOS and the operating system), transparent to the user. The portion of the power management driver in the operating system (OS) is the Advanced Power Management (APM) advanced programming interface written by Intel and Microsoft, which is now present in most operating systems written to operate on Intel's 80X86 family of processors. The portion of the power management driver in BIOS (APM BIOS) communicates with the APM OS driver. The APM OS driver and the APM BIOS routines together control the computer's transition to and from the other three states.

The second state, the standby state, uses less power than the normal operating state, yet leaves any applications executing as they would otherwise execute. In general,

Qualcomm Ex. 1008 - 54/84

power is conserved in the standby state by placing devices in their respective low-power modes. For example, power is conserved in the standby state by ceasing the revolutions of the fixed disk within the hard drive and by ceasing generating the video signal.

The third state is the suspend state. In the suspend state, computer system consumes an extremely small amount of power. The suspended computer consumes very little power from the wall outlet. The only power consumed is small amount of power to maintain the circuitry that monitors the switch from a battery inside the computer system (when the system is not receiving AC power) or a small amount of power generated at an auxiliary power line by the power supply (when the system is receiving AC power).

This small use of power is accomplished by saving the state of the computer system to the fixed disk storage device (the hard drive) before the power supply is turned "off." To enter the suspend state, the computer system interrupts any executing code and transfers control of the computer to the power management driver. The power management driver ascertains the state of the computer system and writes the state of the computer system to the fixed disk storage device. The state of the CPU registers, the CPU cache, the system memory, the system cache, the video registers, the video memory, and the other devices' registers are all written to the fixed disk. The entire state of the system is saved in such a way that it can be restored without the code applications being adversely affected by the interruption. The computer then writes data to the non-volatile CMOS memory indicating that the system was suspended. Lastly, the computer causes the power supply to stop producing power. The entire state of the computer is safely saved to the fixed disk storage device, system power is now "off," and computer is now only receiving a small amount of regulated power from the power supply to power the circuitry that monitors the switch.

The fourth and final state is the off state. In this state, the power supply ceases providing regulated power to the computer system, but the state of the computer system has not been saved to the fixed disk. The off state is virtually identical to typical desktop computers being turned off in the usual manner.

Switching from state to state is handled by the power management driver and is typically based on closure events of a single switch, a flag, and two timers: the inactivity standby timer and the inactivity suspend timer. The system has a single power button. This button can be used to turn on the computer system, suspend the state of the system, restore the state of the system, and turn off the system.

It is desirable to be able to turn on the computer system at a certain time. The resume alarm feature is useful in automating numerous tasks such as system maintenance (performing hard disk drive backups, defragmenting hard disk drives), collecting system information (downloading stock quotes, news, weather, bank statements, etc.), and sending outgoing mail when telephone rates are lowest.

This "wake on alarm" feature is conceptually very simple: turn the system on at a particular data and time. Several prior art notebook computers and lap top computers have had this feature for quite a while. They typically use an expensive, specialized version of the real time clock (RTC) that has been integrated into just about every IBM and so-called compatible computer since the IBM AT computer. The RTC has a 24 hour alarm that can be programmed to generate an interrupt (IRQ8) when the alarm hours, minutes, and seconds match the current hours and minutes. Portables typically leave most devices powered when in suspend, therefore, some of the portion of the interface to the RTC is alive and can initiate a resume when the alarm expires.

There are at least two problems with using the RTC to implement the wake on alarm feature. First, the RTC alarm only spans a 24 hour period. If an event is intended to be scheduled further away in time than 24 hours, the system must wake up at least once every 24 hours and some higher level scheduler must decide whether this is the correct day. Second, if a portable supports suspending, typically the alarm cannot resume the system from that state because it is not powered. Even though the RTC is likely to be powered by a separate battery, the interface logic that drives the wake interrupt (IRQ8) probably requires system power. Therefore, it is not accessible to initiate the resume and restore the state of the computer.

Waking the system from a phone ring is another task that is common among portables. Typically, if a portable computer is configured to resume on a ring from an internal modem, the modem is an expensive modem having a low power mode. The modem is placed into the lowest power mode where there is still enough intelligence to detect a ring and awaken the system. Again this requires power that is available during a suspend but is typically not available when the system is suspended.

SUMMARY OF THE INVENTION

According to the present invention, a power management processor is added to the system to provide the aforementioned features without using the specialized chips used in typical systems and without adding significant cost to the system. In the present system, the power management subsystem added comprises hardware and firmware, as well as system BIOS.

The power management system is powered by an auxiliary supply voltage from the power supply that is available as long as the power supply is connected to AC power. The power management subsystem requires less than 20 milliamps of 5 VDC to operate and the power management processor controls the generation of regulated power by the power supply to the rest of the system. It must contain an interface to the system where the system can program and interrogate the power management processor.

The power management processor monitors the system power switch to determine when the user has requested the system to be turned on or off. The power management processor also implements a minutes to wake alarm, which can be used to cause the system to transition to the normal operating state from either the off state or the suspend state at a time up to 32 years in the future.

Similarly, the power management processor monitors signals from an internal modem and/or an external modem and can cause a transition to the normal operating state from either the off state or the suspend state responsive to a ring. The resume on ring feature can be used to the resume the system to receive incoming voice, data, or facsimile transmissions.

After the power management processor causes a transition to the normal operating state from either the off state or the suspend state, the power management processor can communicate to the system the reason for the transition. Consequently, the system can perform different functions depending on the reason for the transition to the normal operating state.

In the current system, a simple microcontroller is used to implement the wake up features and thus all system devices

Qualcomm Ex. 1008 - 55/84

can be powered off, thereby maximizing power savings. In addition, no special chips are required in the RTC or modem subsections of the computer system. A heartbeat signal is provided by the power management processor approximately every 100 microseconds. This active low pulse is monitored by the host CPU via the state register to determine if the processor is functioning. The host can check for a heartbeat before issuing any writes to avoid hanging the IO bus.

The processor is automatically reset any time the auxiliary power line transitions from low to high, as occurs after a blackout or brownout. More specifically, a glitch will trigger a novel circuit that generates a 100 millisecond reset pulse.

Because the power management processor is always being supplied by the auxiliary supply, it is susceptible to power glitches. Therefore, as a backup system, the switch press logic configured so that the system will turn on if the power button is pressed and held for several seconds, while the system resets the power management processor and the power management processor turns on the power supply.

These and other advantages of the present invention will become more apparent from a detailed description of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings, which are incorporated in and constitute a part of this specification, embodiments of the invention are illustrated, which, together with a general description of the invention given above, and the detailed description given below serve to example the principles of this invention.

FIG. **1** is a perspective view of a personal computer embodying this invention;

FIG. **2** is an exploded perspective view of certain elements of the personal computer of FIG. **1** including a chassis, a cover, an electromechanical direct access storage device and a planar board and illustrating certain relationships among those elements;

FIGS. **3**A and **3**B show a block diagram of certain components of the personal computer of FIGS. **1** and **2**;

FIG. **4** is a state diagram of the computer system of the present invention, showing the four system states: normal, standby, suspend, and off;

FIG. **5** is a block diagram showing the relevant portions of the power supply;

FIGS. **6**A**1**, **6**A**2** and **6**A**3** are an electrical schematic diagram of the power management circuitry of the present invention, showing the various interfaces to other Figures;

FIG. **6**B is an electrical schematic diagram of the connection of the power management circuitry to the internal modem;

FIG. **6**C is a waveform diagram showing the various signals; within the reset circuit for the power management circuitry;

FIG. **6**D is an electrical schematic diagram of a second embodiment of the power supply fault detection and correction circuit;

FIG. **7** is a state diagram of one of the switch states maintained by the power management processor of the present invention;

FIG. **8** is a flow chart showing generally the power-up routine of the present invention;

FIGS. **9**A**1** and **9**A**2** are a flow chart showing the details of the Supervisor Routine, which is called by the APM device driver in the operating system approximately every second;

FIG. **9**B is a flow chart showing the details of the APM Working On Last Request Routine;

FIG. **9**C is a flow chart showing the details of the APM Reject Last Request Routine;

FIGS. **10**A, **10**B, **10**C, **10**D, **10**E and **10**F are a flow chart showing the details of the Suspend Routine of the present invention;

FIGS. **11**A, **11**B, **11**C and **11**D are a flow chart showing the details of the Boot-Up Routine of the present invention;

FIGS. **12**A, **12**B, **12**C, **12**D and **12**E a flow chart showing the details of the Resume Routine of the present invention;

FIGS. **13**A, **13**B, **13**C and **13**D are a flow chart showing the details of the Save CPU State Routine of the present invention;

FIGS. **14**A, **14**B, **14**C and **14**D are a flow chart showing the details of the Restore CPU State Routine of the present invention;

FIGS. **15**A, **15**B and **15**C are a flow chart showing the details of the Save 8959 State Routine of the present invention;

FIGS. **16**A, **16**B, **16**C and **16**D are a flow chart showing the details of the Dynamic Save File Allocation Routine of the present invention;

FIG. **17** is a flow chart showing the details of the Exit Standby Routine of the present invention;

FIG. **18** is a flow chart showing the details of the Enter Standby Routine of the present invention; and

FIGS. **19**A, **19**B, **19**C and **19**D are a flow chart showing the details of the Power management Processor Routines of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

While the present invention will be described more fully hereinafter with reference to the accompanying drawings, in which a preferred embodiment of the present invention is shown, it is to be understood at the outset of the description which follows that persons of skill in the appropriate arts may modify the invention here described while still achieving the favorable results of this invention. Accordingly, the description which follows is to be understood as being a broad, teaching disclosure directed to persons of skill in the appropriate arts, and not as limiting upon the present invention. The present invention deals with the complete design of a computer system, including, but not limited to computer architecture design, digital design, BIOS design, protected mode 80486 code design, application code design, operating system code design, and Advanced Power Management advanced programming interface usage. This application is written for those very familiar with all aspects of computer system design.

Referring now more particularly to the accompanying drawings, a microcomputer system embodying the present invention is there shown and generally indicated at **10** (FIG. **1**). As mentioned hereinabove, the computer **10** may have an associated display monitor **11**, keyboard **12**, mouse **13**, and printer or plotter **14**. The computer **10** has a cover **15** formed by a decorative outer member **16** (FIG. **2**) and an inner shield member **18** which cooperate with a chassis **19** in defining an enclosed, shielded volume for receiving electrically powered data processing and storage components for processing

Qualcomm Ex. 1008 - 56/84

and storing digital data. At least certain of these components are mounted on a multilayer planar **20** or motherboard which is mounted on the chassis **19** and provides a means for electrically interconnecting the components of the computer **10** including those identified above and such other associated elements as floppy disk drives, various forms of direct access storage devices, accessory adapter cards or boards, and the like. As pointed out more fully hereinafter, provisions are made in the planar **20** for the passage of input/output signals to and from the operating components of the microcomputer.

The computer system has a power supply **17**, a power button **21**, also hereinafter the switch **21**, and a power/feedback LED **23**. Unlike in the usual power switch in a typical system, the power button **21** does not switch AC line power to and from the power supply **17**, as will be explained below. The chassis **19** has a base indicated at **22**, a front panel indicated at **24**, and a rear panel indicated at **25** (FIG. **2**). The front panel **24** defines at least one open bay (and in the form illustrated, four bays) for receiving a data storage device such as a disk drive for magnetic or optical disks, a tape backup drive, or the like. In the illustrated form, a pair of upper bays **26**, **28** and a pair of lower bays **29**, **30** are provided. One of the upper bays **26** is adapted to receive peripheral drives of a first size (such as those known as 3.5 inch drives) while the other **28** is adapted to receive drives of a selected one of two sizes (such as 3.5 and 5.25 inch) and the lower bays are adapted to receive devices of only one size (3.5 inch). One floppy disk drive is indicated at **27** in FIG. **1**, and is a removable medium direct access storage device capable of receiving a diskette inserted thereinto and using the diskette to receive, store and deliver data as is generally known. One hard disk drive is indicated at **31** and is a fixed medium direct access storage device capable of storing and delivering data as is generally known.

Prior to relating the above structure to the present invention, a summary of the operation in general of the personal computer system **10** may merit review. Referring to FIGS. **3**A and **3**B, there is shown a block diagram of a personal computer system illustrating the various components of the computer system such as the system **10** in accordance with the present invention, including components mounted on the planar **20** and the connection of the planar to the I/O slots and other hardware of the personal computer system. Connected to the planar is the system processor **40**, also herein CPU **40**, comprised of a microprocessor, which is connected by a high speed CPU local bus **42** through a memory control unit **46**, which is further connected to a volatile random access memory (RAM) **53**. The memory control unit **46** is comprised of a memory controller **48**, an address multiplexer **50**, and a data buffer **52**. The memory control unit **46** is further connected to a random access memory **53** as represented by the four RAM modules **54**. The memory controller **48** includes the logic for mapping addresses to and from the microprocessor **40** to particular areas of RAM **53**. This logic is used to reclaim RAM previously occupied by BIOS. Further generated by memory controller **48** is a ROM select signal (ROMSEL), that is used to enable or disable ROM **88**. While any appropriate microprocessor can be used for system processor **40**, one suitable microprocessor is the 80486 which is sold by INTEL. The Intel 80486 has an internal cache, therefore, any CPU **40** that is an Intel 80486 will have a CPU cache **41**.

While the present invention is described hereinafter with particular reference to the system block diagram of FIGS. **3**A and **3**B, it is to be understood at the outset of the description which follows that it is contemplated that the apparatus and methods in accordance with the present invention may be used with other hardware configurations of the planar board. For example, the system processor **40** could be an Intel 80286 or 80386 microprocessor. As used herein, reference to an 80286 or 80386 or 80486 generally intends such a microprocessor as obtained from Intel. However, in recent times other manufacturers have developed microprocessors which are capable of executing the instruction set of the Intel X86 architecture, and usage of the terms stated is intended to encompass any microprocessor capable of executing that instruction set. As known to persons skilled in the applicable arts, early personal computers typically used the then popular Intel 8088 or 8086 microprocessor as the system processor. These processors have the ability to address one megabyte of memory. More recently, personal computers typically use the high speed Intel 80286, 80386, and 80486 microprocessors which can operate in a virtual or real mode to emulate the slower speed 8086 microprocessor or a protected mode which extends the addressing range from 1 megabyte to 4 Gigabytes for some models. In essence, the real mode feature of the 80286, 80386, and 80486 processors provide hardware compatibility with software written for the 8086 and 8088 microprocessors. Processors in the Intel family described are frequently identified by a three digit reference to only the last three digits of the full type designator, as "486".

Returning now to FIGS. **3**A and **3**B, the CPU local bus **42** (comprising data, address and control components, not shown) provides for the connection of the microprocessor **40**, a math coprocessor **44** (if not internal to the CPU **40**), a video controller **56**, a system cache memory **60**, and a cache controller **62**. The video controller **56** has associated with it a monitor (or video display terminal) **11** and a video memory **58**. Also coupled on the CPU local bus **42** is a buffer **64**. The buffer **64** is itself connected to a slower speed (compared to the CPU local bus **42**) system bus **66**, also comprising address, data and control components. The system bus **66** extends between the buffer **64** and a further buffer **68**. The system bus **66** is further connected to a bus control and timing unit **70** and a DMAunit **71**. The DMA unit **71** is comprised of a central arbiter **82** and a DMA controller **72**. An additional buffer **74** provides an interface between the system bus **66** and an optional feature bus such as the Industry Standard Architecture (ISA) bus **76**. Connected to the bus **76** are a plurality of I/O slots **78** for receiving ISA adapter cards (not shown). ISA adapter cards are pluggably connected to the I/O slots **78** and may provide additional I/O devices or memory for the system **10**.

An arbitration control bus **80** couples the DMA controller **72** and central arbiter **82** to the I/O slots **78**, a diskette adapter **84**, and an Integrated Drive Electronics (IDE) fixed disk controller **86**.

While the microcomputer system **10** is shown with a basic 4 megabyte RAM module **53**, it is understood that additional memory can be interconnected as represented in FIGS. **3**A and **3**B by the addition of optional higher-density memory modules **54**. For purposes of illustration only, the present invention is described with reference to the basic four megabyte memory module.

A latch buffer **68** is coupled between the system bus **66** and a planar I/O bus **90**. The planar I/O bus **90** includes address, data, and control components respectively. Coupled along the planar I/O bus **90** are a variety of I/O adapters and other components such as the diskette adapter **84**, the IDE disk adapter **86**, an interrupt controller **92**, an RS-232 adapter **94**, nonvolatile CMOS RAM **96**, also herein referred to as NVRAM, a CMOS real-time clock (RTC) **98**, a parallel

Qualcomm Ex. 1008 - 57/84

adapter **100**, a plurality of timers **102**, the read only memory (ROM) **88**, the **8042 104**, and the power management circuitry **106**. The 8042, shown at **104**, is the slave microprocessor that interfaces with the keyboard **12** and the mouse **13**. The power management circuitry **106** is in circuit communication with the power supply **17**, the power switch **21**, the power/feedback LED **23**, and an internal modem **900** and/or an external modem **902**. The external modem is typically connected to a transformer **904**, which is connected to a typical wall outlet, as is known to those skilled in the art. The modems **900**, **902** are connected to a typical telephone outlet. The power management circuitry **106** is shown in FIG. **6**A and **6**B and is more fully described in the text accompanying FIGS. **6**A, **6**B, **6**C, and **7**. The read only memory **88** includes the BIOS that is used to interface between the I/O devices and the operating system of the microprocessor **40**. BIOS stored in ROM **88** can be copied into RAM **53** to decrease the execution time of BIOS. ROM **88** is further responsive (via ROMSEL signal) to memory controller **48**. If ROM **88** is enabled by memory controller **48**, BIOS is executed out of ROM. If ROM **88** is disabled by memory controller **48**, ROM is not responsive to address inquiries from the microprocessor **40** (i.e. BIOS is executed out of RAM).

The real-time clock **98** is used for time of day calculations and the NVRAM **96** is used to store system configuration data. That is, the NVRAM **96** will contain values which describe the present configuration of the system. For example, NVRAM **96** contains information describing the capacity of a fixed disk or diskette, the type of display, the amount of memory, time, date, etc. Furthermore, these data are stored in NVRAM whenever a special configuration program, such as SET Configuration, is executed. The purpose of the SET Configuration program is to store values characterizing the configuration of the system to NVRAM.

Nearly all of the above devices comprise volatile registers. To prevent the unnecessary cluttering of the drawings, the registers of a particular device will be referenced to that device. For example, the CPU registers will be referred to as the CPU **40** registers and the video controller registers will be referenced as the video controller **56** registers.

As mentioned hereinabove, the computer has a cover indicated generally at **15** which cooperates with the chassis **19** in forming an enclosed, shielded volume for containing the above identified components of the microcomputer. The cover **15** preferably is formed with an outer decorative cover member **16** which is a unitary molded component made of a moldable synthetic material and a metallic thin sheet liner **18** formed to conform to the configuration of the decorative cover member. However, the cover can be made in other known ways and the utility of this invention is not limited to enclosures of the type described.

States of Operation

Referring now to FIG. **4**, a state diagram of the computer system of the present invention is shown. The computer system **10** of the present invention has four states: a normal operating state **150**, a standby state **152**, a suspend state **154**, and an off state **156**. The transitions between the states shown in FIG. **4** are meant to be descriptive of the preferred embodiment, but not limiting. Consequently, additional events may alternatively be used to cause state transitions.

The normal operating state **150** of the computer system **10** of the present invention is virtually identical to the normal operating state of any typical desktop computer. Users may use applications and basically treat the computer as any other. One difference, transparent to the user, is the presence of a power management driver in the operating system (the "APM OS driver"), which runs in the background, and various APM BIOS routines. The APM BIOS routines are discussed in the text below and include the Suspend Routine, the Resume Routine, the Boot-Up Routine, the Supervisor Routine, the Save CPU State Routine, and the Restore CPU State Routine. One APM BIOS routine not shown on any of the Figures is the APM BIOS Routing Routine. The APM BIOS Routing Routine essentially accepts commands from the APM OS driver and calls the appropriate APM BIOS routine. For example, when the APM OS driver issues the Suspend Command, the APM BIOS Routing Routine calls the Suspend Routine. As another example, whenever the APM **0**S driver issues the Get Event command, the APM BIOS Routing Routine calls the Supervisor Routine. These routines are located in BIOS and are shadowed when the BIOS is shadowed. The power management driver in the OS and the APM BIOS routines control the computer's transition between the four states. A reference to the word "APM" by itself generally is a reference to the APM OS driver, although the context may dictate otherwise.

The second state, the standby state **152**, uses less electrical power than the normal operating state **150**, yet leaves any applications executing as they would otherwise execute. In general power is saved in the standby state **152** by the code placing devices into respective low power modes. In the preferred embodiment, electrical power is conserved in the standby state **152** by ceasing the revolutions of the fixed disk (not shown) within the fixed disk storage device **31**, by ceasing generating the video signal, and by putting the CPU **40** in a low power mode, as will be more fully explained below. However, this is not intended to be limiting and other methods may be used to reduce power consumption, such as slowing or stopping the CPU clock.

In the preferred embodiment, electrical power is conserved in three separate ways. First, in the normal operating state **150**, the fixed disk within the fixed disk storage device **31** is constantly spinning at, e.g., 3600, 4500, or 5400 revolutions per minute (RPM). In the standby state **152**, the IDE disk controller **86** is given the command to cause the fixed disk storage device **31** to enter a low-power mode (the fixed disk inside the fixed disk storage device **31** ceases spinning), thereby conserving the power the motor (not shown) inside the fixed disk storage device **31** typically consumes while spinning the fixed disk.

Second, in the normal operating state **150**, the video controller **56** of the computer system constantly generates a video signal (HSYNC, VSYNC, R, G, B, etc. as is well known in the art) corresponding to the image seen on the video display terminal **11**. In the standby state **152** the video controller **56** ceases generating the video signal, thereby conserving the electrical power normally consumed by the video controller **56**; HSYNC, VSYNC, R, G, and B are all driven to approximately 0.00 VDC. Using a VESA (Video Electronics Standards Association) compliant monitor allows further power savings because VESA compliant monitors turn themselves off when HSYNC and VSYNC are at approximately 0.00 VDC.

Third, in the normal operating state **150**, the CPU **40** constantly executes commands, thereby consuming electrical power. In the standby state **152** the BIOS issues a HALT instruction in response to the APM CPU Idle Call. Executing a HALT instruction significantly reduces CPU power consumption until the next hardware interrupt occurs. When truly idle, the CPU can remain halted more than 90% of the time.

Note that some systems have "screen-savers," which cause the screen **11** to become dark to prevent phosphor

Qualcomm Ex. 1008 - 58/84

burn-in of the front surface of the video display terminal. In most of such systems, the video controller **56** is still generating a video signal; it is merely generating a video signal corresponding to a dark screen or a dynamic display. Thus, a computer system executing a screen-saver still consumes the electrical power necessary to generate the video signal.

The third state is the suspend state **154**. In the suspend state **154**, computer system consumes an extremely small amount of electrical power. The suspended computer consumes less than 100 milliwatts of electrical power in the preferred embodiment. The only power consumed is approximately 5 watts consumed due to inefficiencies in the power supply **17** and a small amount of power used by the power management circuitry **106**.

This small use of electrical power is accomplished by saving the state of the computer system to the fixed disk storage device (the hard drive) **31** prior to turning the power supply "off." To enter the suspend state **154**, the CPU **40** interrupts any applications and transfers program execution control of the CPU to the power management driver. The power management driver ascertains the state of the computer system **10** and writes the entire state of the computer system to the fixed disk storage device **31**. The state of the CPU **40** registers, the CPU cache **41**, the system RAM **53**, the system cache **60**, the video controller **56** registers, the video memory **56**, and the remaining volatile registers are all written to the fixed disk drive **31**. The entire state of the system **10** is saved in such a way that it can be restored without significant usability penalties. That is, the user need not wait for the system to load the operating system, and load the graphical user interface, and application programs as it normally would.

The computer then writes data to the non-volatile CMOS memory **96** indicating that the system was suspended. Lastly, the CPU **40** commands the microcontroller U2 to cause the power supply **17** to stop providing regulated power to the system through the ±5 VDC and ±12 VDC lines. The computer system **10** is now powered down with the entire state of the computer safely saved to the fixed disk storage device **31**.

The word "state" is used throughout this document in two similar, but possibly confusing ways. Devices can be "in" a particular state. The four system states—normal **150**, standby **152**, suspend **154**, and off **156**—refer to the general state of the computer system **10** of the present invention. These "states" describe the computer system **10** in a general way. For example, while in the normal operating state **150**, the CPU **40** is still executing code and changing a plurality of registers within the system **10**. Likewise, similar activity occurs while in the standby state **152**. Thus, the memory and register configuration of the computer system **10** is dynamic while the system **10** is in the normal operating state **150** and the standby state **152**.

Other devices can also be "in" certain states. The power management circuitry **106** preferably uses a second processor as a power management processor, such as a microcontroller U2 shown in FIG. **6**A, to implement the various power management features. Many such processors are suitable; in this particular embodiment, the power management processor is a preprogrammed 83C750 microcontroller. The variables and pins of the microcontroller U2 can be in several states, as will be explained in the text accompanying FIG. **6**A.

Contrast the above with the "state of" a device, for example, the "state of the computer system **10**" or the "state of the CPU **40**." The "state of" a device refers to the condition of that device at a particular computer cycle. All memory locations and registers will have particular binary values. The "state of" a device is a static binary snapshot of the contents of that device.

The "state of" the computer system **10** refers to operational equivalents and not necessarily exact copies. For example, a computer system in a state A may have certain memory in either CPU cache **41** or system cache **60**. It is possible to "flush" the contents of either cache back to the system RAM **53**, putting the computer system in a state B. Purely speaking, the state of the computer system in state A is different from the state of the computer system in state B, because the contents of cache and system RAM are different. However, from a software operational perspective, state A and state B are the same, because, aside from a slight decrease in system speed (caused by the program not having the benefit of executing out of cache), the executing programs are not affected. That is, a computer in state A and a computer in state B are software operationally equivalent, even though the computer whose cache was flushed will experience a slight decrease in performance until the cache areas are reloaded with helpful code.

The word "power" is also used in two similar, but possibly confusing ways. "Power" most often refers to electrical power. However, "power" also refers to computational power occasionally. The context should make the intended usage obvious.

A "circuit" is generally a reference to a physical electronic device or a plurality of devices electrically interconnected. However, the term "circuit" also is intended to encompass CPU code equivalents of physical electronic devices. For example, on the one hand, a two-input NAND gate can be implemented via a 74LS00 or, equivalently, in a programmable device. These two devices are physical electronic devices. On the other hand a NAND gate can also be implemented by having the CPU **40** read two inputs from two CPU-readable input ports, generate the NAND result using a CPU command, and output the result via a CPU-writable output port. These CPU-interfacable ports can be simple, such as decoded latches, or their programmable device equivalent, or complex, such as PIAs, which are well-known in the art. The term "circuit" is meant to be broad enough to include all three examples of NAND gate implementations, above. In some cases, "circuit" may refer to merely an electrical pathway. Types of electrical pathways include a wire, a trace or via on a printed circuit board, etc., or any combination of types of electrical pathways that form a single electrically connected pathway.

A "signal" may refer to a single electrical waveform or a plurality of waveforms. For example, the video controller generates a video signal. The video signal is actually a plurality of signals on a plurality of electrical conductors: HSYNC, VSYNC, R, G, B, etc. as is well known in the art.

Returning now to FIG. **4**, the fourth and final state is the off state **156**. The off state **156** is virtually identical to any typical computer system that has been turned off in the ordinary sense. In this state, the primary/regulation unit **172** of the power supply **17** ceases providing regulated power to the computer system **10**, (with the exception of a small amount of regulated power through AUX**5**, as will be more fully explained in the text accompanying FIG. **5**) but the state of the computer system **10** has not been saved to the fixed disk **31**. The suspend state **154** and the off state **156** are similar in that the power supply **17** no longer generates regulated power. They differ in that in the off state **156**, the state of the computer system **10** is not saved to the hard drive **31**, as it is in the suspend state **154**. Moreover, when leaving the off state **156**, the computer **10** "boots" as if it is being

Qualcomm Ex. 1008 - 59/84

turned on. That is, any executing code must be started either by the user or automatically by a means such as the AUTOEXEC.BAT file. However, when leaving the suspend state **154**, the computer **10** resumes executing where it was when it was interrupted.

FIG. **4** also shows a general overview of the events that cause transitions between the four states. These events will be further explained in the text accompanying FIGS. **6** through **8**; however, a cursory explanation may be helpful. The power button **21**, two timers (the inactivity standby timer and the inactivity suspend timer, see FIG. **9** and accompanying text), a minutes to wake timer, and a Suspend Enable Flag (see FIGS. **6**A and **7** and accompanying text) all affect which state the computer enters. In general, the two timers can be either hardware or CPU code timers, executing on the CPU as a program. In the preferred embodiment, they are both CPU code timers, executing from the BIOS data segments. However, the two timers could conceivably be hardware timers, which would be a better solution, in that it would reduce the overhead of the system. The timers are more fully explained in the text accompanying FIG. **9**. Both timers are active when the computer **10** is in either the normal operating state **150** or the standby state **152**. The timers are in communication with other routines such that the expiration of either timer causes a transition as outlined below. Either or both timers can be configured to expire after a certain period of time, depending on the particular needs of the user. In the preferred embodiment, the inactivity standby timer and the inactivity suspend timer can be set to expire after 10 to 90 minutes. Either or both timers can be stopped, that is, configured to never expire. "Stopping" the timers can take the form of actually ceasing the incremental counting action of the timers or merely ignoring their expiration. In the preferred embodiment, setting a zero value in the timer expiration value causes the timer expiration not to be tested. The user of a networked computer may, for example, not want the computer to enter the suspend state **154** because doing so may cause the LAN to fail with respect to that computer.

In theory, the timers can count up or count down and can be reset to a fixed predetermined state and expected to count to another fixed predetermined state when the timer is started (or restarted) or the present value can be used and a difference or sum calculated as the endpoint expiration trigger. In the preferred embodiment, when the timers are reset, the present value of the minutes variable from the real-time clock **98** is stored. The timers are checked for expiration by subtracting the current minutes value from the saved minutes value and comparing the difference to the values selected by the user.

Both timers are affected by certain system activity. For example, in the preferred embodiment, user activity in the form of keyboard **12** keys being pressed, the mouse **13** being moved, mouse **13** buttons being pressed, or hard drive **31** activity causes each timer to be restarted, as more fully explained in the text accompanying FIG. **9**; therefore, while a user is pressing keyboard **12** keys or using the mouse **13**, or while an application is accessing the hard drive **31**, neither timer will expire. In addition other system events might be used to reset the timers. Any of the hardware interrupts might alternatively be monitored for activity. Thus, it might be desirable to have printing (IRQ**5** or IRQ7) or a COMM port access (IRQ**2** or IRQ**3**) prevent the system from entering the suspend state **154**.

The Suspend Enable Flag is a CPU-manipulable and readable latch within the microcontroller U**2**, which will be more fully explained in the text accompanying FIG. **6**A. In short, putting the microcontroller U**2** in one mode causes a press of the switch **21** to place the system **10** into the off state **156** and putting the microcontroller U**2** into another mode causes a press of the switch **21** to place the system **10** into the suspend state **154**. If the computer system **10** is in the normal operating state **150** and the power button **21** is pressed while the Suspend Enable Flag written to the microcontroller U**2** is CLEARed, then the computer system **10** enters the off state **156**, as shown at **158**. If the computer system **10** is in the off state **156** and the power button **21** is pressed, then the computer system enters the normal operating state **150**, as shown at **160**. In addition, several "external events," which are explained more fully below, can cause the system to transition from the off state **156** to the normal operating state **150**.

If the computer system **10** is in the normal operating state **150**, one event can cause the computer to enter the standby state **152**: if the inactivity standby timer expires, the computer system **10** will change to the standby state **152**, as shown at **162**. In the alternative, the system can provide a means, such as a dialog box, a switch, or other input device, for the user to force the system into the standby state immediately. While in the standby state **152**, any system or user activity of the kind previously described, including the user pressing the power button **21**, will clause the computer **10** to leave the standby state **152** and re-enter the normal operating state **150**, as shown at **164**.

Pressing the power button **21** causes the system to change from the standby state **152** to the normal operating state **150** to prevent user confusion. As mentioned above, while in the standby state, the monitor **11** is blanked and the power/feedback LED **23** is either on or blinking, depending on how the flags in the microcontroller U**2** are configured. A user approaching the system might notice that the monitor **11** is blank and, thinking that the system is in the suspend state **154** or the off state **156**, press the power button **21** in an attempt to cause the system to enter the normal operating state **150**. If a press of the power button **21** causes the system to enter either the suspend state **154** or the off state **156**, then the user above will have just either turned off or suspended the computer, which is directly contrary to the user's intention. Therefore, when in the standby state **152**, a press of the power button **21** causes the system to change from the standby state to the normal operating state. Even if idle, the CPU **40** will soon test whether the switch was pressed. Hardware interrupts remove the CPU **40** from the idle state approximately 20 times per second; thereafter during the next APM Get Event, the microcontroller U**2** is queried to determine whether the switch **21** was pressed.

If the computer **10** is in the normal operating state **150**, two events can cause it to enter the suspend state **154**. First, if the inactivity suspend timer expires, the computer system **10** will change to the suspend state **154**, as shown at **166**. Second, the user can cause the computer **10** to enter the suspend state **154** immediately by pressing the power button **21** while the Suspend Enable Flag written to the microcontroller U**2** is SET, also shown at **166**. In the alternative, additionally, the APM driver can issue a suspend request via a "Set Power State: Suspend" command, which causes the APM BIOS driver to call the Suspend Routine. While in the suspend state **154**, the user changes to the normal operating state **150** by pressing the power button **21**, as shown at **168**.

In addition, several external events can be used to change the system **10** from the suspend state **154** to the normal operating state **150**, at **168**, or from the off state **156** to the normal operating state **150**, at **160**. For example, a telephone ring detect circuit in the microcontroller U**2** in the circuitry

of FIG. **6**A is configured to cause the system **10** to leave the off state **156** or the suspend state **154** and enter the normal operating state **150** when an attached telephone line rings. Such a feature is useful for a system receiving telefax data or digital data. The system enters the normal operating state responsive to the telephone ring, performs the preset functions, such as accepting an incoming facsimile transmission, uploading or downloading files, allowing remote access to the system, etc., and enters the suspend mode again responsive to the expiration of the Inactivity Suspend Timer, only consuming power while the system is in the normal operating state.

Likewise the microcontroller U**2** implements a minutes to wake alarm counter, which allows an alarm-type event to cause the system **10** to leave the suspend state **154** or the off state **156** and enter the normal operating state **150**. Such a system is useful in sending telefax or digital data at a certain time of day to take advantage of lower telephone usage rates, and performing system maintenance functions, such as backing up the system hard drive **31** with a tape backup system. In the latter case, the minutes to wake alarm is set to turn the machine on a fixed period of time before the scheduler causes the tape backup program to be executed. In the alternative, the APM BIOS scheduler can be used to cause the execution of the tape backup program.

Lastly, if the computer system **10** is in the standby state **152** and the inactivity suspend timer expires, then the computer **10** changes to the suspend state **154** as shown at **170**. The computer system **10** cannot change back from the suspend state **154** to the standby state **152**, but may only transition to the normal operating state **150** as described in the text accompanying transition **168**.

Obviously, the computer system **10** cannot instantaneously change states. In each transition from one of the four states, a certain period of time will be required to make the necessary system changes. The details of each transition period will be explained in the text accompanying FIGS. **6** through **15**.

System Hardware

Before discussing the details of the code executing on the CPU **40**, it may be helpful first to discuss the hardware required to achieve the four states. A block diagram of the power supply **17** is shown in FIG. **5**. The power supply **17** has two units: a control unit **174** and a primary/regulation unit **172**. The power supply **17** has several inputs: Line-In, which accepts either 115 VAC or 220 VAC from a typical wall outlet, and $\overline{ON}$, which controls the regulation activity of the power supply **17**. The power supply **17** has several outputs: AC Line-Out, ±5 VDC, ±12 VDC, AUX**5**, GND, and POWERGOOD. The AC Line-Out is 115 VAC that is typically passed to the electrical power input (not shown) of the video display terminal **11**. The control unit **174** accepts the $\overline{ON}$ input and generates the POWERGOOD output. The primary/regulation unit **172** selectively regulates the 115 VAC from the Line-In input down to ±5 VDC, ±12 VDC. Whether the primary/regulation unit **172** regulates power at the ±5 VDC and ±12 VDC lines depends on the value of $\overline{ON}$, as interfaced by the control unit **174**. In the preferred embodiment, the control unit **174** should provide isolation for the circuitry generating the $\overline{ON}$ signal using, for example, an appropriate optoisolator.

The Line-In input and the AC Line-Out, ±5 VDC, ±12 VDC, GND, and POWERGOOD outputs are well known in the art. When the power supply **17** is "off," that is not providing regulated voltages from the Line-In, the POWERGOOD signal is a logical ZERO. When the power supply **17** is "on," the power supply **17** generates the ±5 VDC and ±12 VDC regulated voltages from the 115 VAC Line-In. These four regulated voltages and their associated GND are the "system power" as is commonly known in the art. When the regulated voltages attain levels within acceptable tolerances, the POWERGOOD signal changes to a logical ONE. Whenever either the +5 or +12 Volt lines fall out of tolerance, the POWERGOOD signal becomes a logical ZERO, thereby indicating this condition.

The AUX**5** output provides an auxiliary +5 VDC to the planar. When the power supply **17** is plugged into a typical wall outlet supplying a nominal 115 VAC, the primary/regulation unit **172** provides regulated +5 VDC at AUX**5**, whether the power supply is "on" or "off." Thus, while receiving AC power, the power supply **17** is always providing a nominal +5 VDC at AUX**5**. The AUX**5** output differs from the +5 output in that the primary/regulation unit **172** only generates regulated +5 VDC through the +5 output while the power supply **17** is "on." The AUX**5** output further differs from the +5 output in that in the preferred embodiment, the primary/regulation unit **172** supplies several amps of current at +5 VDC through the +5 output, while the primary/regulation unit **172** supplies less than an amp at +5 VDC though the AUX**5** output.

Typical prior power supplies use a high-amperage double-throw switch to connect and disconnect the Line-In input to and from the regulation section of the power supply. The power supply **17** in the present invention does not use a high-amperage double-throw switch. Rather, the switch **21** controls circuitry that generates the $\overline{ON}$ signal. In the preferred embodiment, the switch **21** is a momentary single pole, single throw pushbutton switch; however, those skilled in the art could adapt the circuitry of FIG. **6**A to make use of other types of switches such as a single-pole, double throw switch. The AC Line-In is always connected to the primary/regulation unit **172** from the wall outlet. When $\overline{ON}$ is a logical ONE (approximately AUX**5**, nominally +5 VDC), the primary/regulation unit **172** does not regulate the 115 VAC Line-In to ±5 VDC or ±12 VDC through the ±5 or ±12 outputs. The primary/regulation unit **172** merely provides a low-amperage nominal +5 VDC at the AUX**5** output. On the other hand, when $\overline{ON}$ is a logical ZERO (approximately GND), the primary/regulation unit **172** does regulate the 115 VAC Line-In to ±5 VDC and ±12 VDC through the four ±5 and ±12 outputs, respectively. Thus, when $\overline{ON}$ is a ONE, the power supply **17** is "off" and when $\overline{ON}$ is a ZERO, the power supply **17** is "on."

If specified, power supplies having an AUX**5** output and an ON input, like the power supply **17** described above, can be obtained from suppliers of more conventional power supplies.

Referring now to FIG. **6**A, a schematic drawing of the electronic circuitry of the computer system **10** of the present invention is shown. The circuitry in FIG. **6**A is responsible for interfacing between the switch **21**, the power/feedback LED **23**, the power supply **17**, the video display terminal **11**, and code executing on the CPU **40**.

The circuitry comprises four (4) integrated circuits—U**1**, a first preprogrammed PAL16L8; U**2**, a preprogrammed 83C750 microcontroller; U**3**, a 74LS05, which is well known in the art; and U**4**, a second preprogrammed PAL16L8 (not shown)—and the various discrete components in circuit communication as shown in FIG. **6**A. In general, the PALs U**1** and U**4** (not shown) interface between the planar I/O bus **90** of FIGS. **3**A and **3**B and the microcontroller U**2**, which interfaces to the remaining circuitry of FIG. **6**A, which interfaces to the switch **21**, the power supply **17**, the video display terminal **11**, and a programmable clock

Qualcomm Ex. 1008 - 61/84

synthesizer **906**. The clock synthesizer **906** can be one of many such devices known to those of ordinary skill in the art. One such part is the CH9055A, which is manufactured by Chrontel, and widely available from numerous sources.

The circuitry of FIG. **6**A further comprises the switch **21**, a 16 MHz crystal **Y1**, eighteen resistors **R1–R18**, eight capacitors **C1–C8**, three N-type MOSFETs **Q1–Q3**, which are standard low-current NMOS FETs suitable for acting as a logic switch in the preferred embodiment, and six (6) 1N4148 small signal diodes **CR1–CR6**, all configured and connected as shown in FIG. **6**A. The resistors **R1–R18** are ¼ Watt resistors and are of values shown in FIG. **6**A, ±5%. The capacitor **C1** is a 10 μF (±10%) electrolytic capacitor. The capacitors **C2** & **C3** are 22 pF (±10%) tantalum capacitors. The capacitors **C4–C8** are 0.1 μF (±10%) ceramic capacitors. Finally, the capacitor **C9** is a 1000 pF (±10%) ceramic capacitor.

The crystal **Y1** and the capacitors **C2** and **C3** generate signals used by the microcontroller **U2** to control the timing of operations, as is known in the art. The diodes **CR1** and **CR3** and the resistor **R14** isolate the **AUX5** signal from the VBAT signal, while at the same time allowing the **AUX5** signal to supplement the VBAT signal in that while the power supply **17** generates the **AUX5** signal, the battery **171** is not drained. Rather, the **AUX5** signal is stepped down through the diodes **CR1** and **CR3** to supply the proper voltage to the devices connected to VBAT. In the alternative, the VBAT line is isolated from the **AUX5** line.

The second PAL **U4** (not shown) is connected to address lines **SA(1)** through **SA(15)** and the AEN (address enable) line. **SA(1)** through **SA(15)** and AEN are part of the planar I/O bus **90** shown in FIGS. **3**A and **3**B. The second PAL **U4** is programmed to be merely an address decoder, presenting an active low signal DCD# when a predetermined address is presented on address lines **SA(1)** through **SA(15)** and the AEN (address enable) line is active. In this particular embodiment, the second PAL **U4** is preprogrammed to decode two consecutive 8-bit I/O ports at addresses **0ECH** and **0EDH**. In the alternative, the DCD# signal can be generated by another electronic device, such as a memory controller or an ISA controller chipset, as is known to those skilled in the art.

The first PAL **U1** is programmed to provide several functions: (i) a read/write interface between the CPU and the microcontroller **U2** to allow commands and data to be transferred between the CPU **40** and the microcontroller **U2**, (ii) a logical ORing of the mouse interrupt **INT12** and the keyboard interrupt **INT1**; and (iii) a reset output to reset the microcontroller **U2** responsive to commands from the CPU **40**.

The first PAL **U1** makes use of two consecutive I/O ports, also herein referred to as the "power management ports." The first PAL **U1** has eight (8) inputs from the planar I/O bus **90**: SD(4) , SD(**0**) , SA(**0**), IOW#, IOR#, RST_DRV, IRQ1, and IRQ12. The first PAL **U1** is reset to a known initial condition by the active high signal RST_DRV input at pin **7** (**I6**), which is generated by the memory controller **46**, as is well known to those skilled in the art.

A reset line RST751 of the microcontroller **U2** is at pin **9**. A reset subcircuit **920** is responsible for generating the RST751 signal and comprises the four resistors **R4**, **R16**, **R17**, and **R18**, the two capacitors **C1** and **C8**, and the two MOSFETS **Q2** and **Q3**, in circuit communication with the first PAL **U1** and the microcontroller **U2** as shown in FIG. **6**A. The reset subcircuit **920** interfaces the reset output signal RESET from the first PAL **U1** to the reset input signal RST751 of the microcontroller **U2** such that when the RESET line is at a logical ONE, the RST751 line is pulled to a logical ONE, thereby resetting the microcontroller **U2**.

The first PAL **U1** resets the microcontroller **U2** responsive to the CPU **40** writing a logical ONE to bit **0** of control port **0EDH**. Writing a logical ONE to bit **0** of control port **0EDH** causes the first PAL **U1** to pull the RESET line to a logical ONE, which pulls the RST751 line to a logical ONE, thereby resetting the microcontroller **U2**. The CPU **40** clears the reset request by writing a logical ZERO to bit **0** of control port **0EDH**.

In addition, the reset subcircuit pulls the RST751 line to a logical ONE, thereby resetting the microcontroller **U2**, whenever the voltage of **AUX5** signal raises by a given amount, as would occur after the **AUX5** voltage lowers during a "brownout" or "blackout" of the AC source to the power supply **17** occurs, as shown in FIG. **6**C. The manufacturer of the 83C750, Philips, suggests using a simple RC circuit to prevent reset problems; however, a simple RC circuit can allow the 83C750 to latch up during power supply brownouts. In the particular configuration of FIG. **6**A, the RST751 line is pulled to a logical ONE for a period of time determined by **R17** and **C8** (thereby resetting the microcontroller **U2**) when the **AUX5** voltage raises by a threshold amount in a period of time greater than the time constant determined by **R4**, **R16**, and **C1**. This would occur after a typical brownout or blackout. The threshold value is approximately 1.5 VDC in the embodiment shown in FIG. **6**A.

Referring now to FIG. **6**C waveforms for the reset circuit **920** are shown for a period of time as **AUX5** rises as AC power is applied to the power supply **17** and a period of time during which a "brownout" occurs. Before t0, the power supply is not generating **AUX5**, VBAT is at approximately 3.3 Volts, **Q3** is conducting and pulling the RST751 line to ground. At t0, the power supply begins generating **AUX5** and the voltage begins rising at a rate based on the load and the capacitors in the power supply affecting **AUX5**. **Node1**, the node between **C1** and **R4**, is capacitively coupled to **AUX5**; therefore, it rises as **AUX5** rises.

At t1, **Node1** reaches approximately 1.5 Volts, which is sufficient to trigger **Q2**, which pulls **Node2** to ground. At t2, as **Node2** passes 2.5 Volts, **Q3** ceases conducting and the RST751 line jumps to the level of **AUX5** via **R18** and rises with **AUX5** to approximately 5 Volts. As the RST751 line becomes approximately 3 Volts, the microcontroller **U2** is reset.

At t3, **AUX5** stops rising, therefore, **Node1** stops rising and begins discharging to ground (the RESET line of the first PAL **U1** is LOW) at a rate determined by **C1** and **R4**. At t4, as **Node1** passes through approximately 1.5 Volts, **Q2** stops conducting and **Node2** charges at a rate determined by **C8** and **R17**. At t5, as **Node2** passes approximately 2.5 Volts, **Q3** conducts, pulling the RST751 line to ground. Thus, the reset on power-on is complete; the system is usually in the state with **AUX5** at 5 Volts, VBAT at 3.3 Volts, and **Node1** at ground and **Node2** at VBAT.

At t6, a brownout starts at the **AUX5** line and **AUX5** discharges. Being capacitively coupled to **AUX5**, **Node1** tries to follow **AUX5**, but cannot, because diodes in the first PAL **U1** prevent it from going much lower than –0.5 Volts. At t7, **AUX5** is at its lowest point and starts rising again. Again, **Node1** follows **AUX5** and rises. At t8, **Node1** reaches approximately 1.5 Volts, which is sufficient to trigger **Q2**, which pulls **Node2** to ground. At t9, as **Node2** passes 2.5 Volts, **Q3** ceases conducting and the RST751 line jumps to the level of **AUX5** via **R18** and rises with **AUX5** to approximately 5 Volts. As the RST751 line becomes approximately 3 Volts, the microcontroller **U2** is reset.

Qualcomm Ex. 1008 - 62/84

At t10, AUX5 stops rising, therefore, Node1 stops rising and begins discharging to ground (the RESET line of the first PAL U1 is LOW) at a rate determined by C1 and R4. At t11, as Node1 passes through approximately 1.5 Volts, Q2 stops conducting and Node2 charges at a rate determined by C8 and R17. At t12, as Node2 passes approximately 2.5 Volts, Q3 conducts, pulling the RST751 line to ground. Thus, the brownout-induced reset cycle is complete. Notice that during this particular brownout, Node1 did not rise above 3 Volts and, therefore, could not have reset the microcontroller if connected to the RST751 pin. However, the voltage of AUX5 lowered below 4 Volts, which would have been enough to cause the microcontroller U2 to enter an undefined state.

The threshold for triggering a reset is tied to the reference value; therefore, to raise or lower the threshold voltage, the value of the reference (in this case VBAT), must be raised or lowered, respectively. The reset circuit provides the benefits of increased reset protection for the microcontroller U2, while being very inexpensive and consuming virtually no power when not resetting the microcontroller U2.

Referring back to FIG. 6A, the microcontroller U2 is interfaced to the CPU 40 via the first PAL U1 and has a number of inputs, outputs, and internally controllable functions.

The SWITCH signal is input at pin 8 (P0.0) and reflects the current state of the pushbutton 21. The pushbutton 21 is normally open. While the pushbutton 21 is open, the SWITCH line is pulled to a logical ZERO (ground) through resistor R1. When the pushbutton 21 is pressed, thereby causing a closure event, the SWITCH line is pulled up to a logical ONE (AUX5) through resistor R13. Capacitor C6 acts to debounce the switch closure event; any further debouncing of closure events of the switch 21 are performed within the microcontroller U2 by reading the SWITCH a predetermined number of times, e.g., 50 times, and assuring that the SWITCH line is the same for all those reads, as is known to those skilled in the art.

The regulation of the power supply 17 is directly controllable by the microcontroller U2. As shown in FIG. 6A, the ON signal is output at pin 5 (P3.0) and is wire-ORed with the SWITCH signal via resistor R6 to control the ON# signal of the power supply. When the ON signal is a logical ONE, MOSFET Q1 conducts, thereby pulling the ON# line (pin 2 of JP2) to a logical ZERO (GND), thereby causing the power supply 17 to begin providing regulated power to the system through the ±5 VDC and ±12 VDC lines. On the other hand, when the ON line is a logical ZERO, MOSFET Q1 does not conduct, therefore the ON# line (pin 2 of JP2) is pulled to a logical ONE (AUX5) by resistor R7, thereby causing the power supply 17 to cease providing regulated power through the ±5 VDC and ±12 VDC lines.

The state of the ON line is controlled by the microcontroller U2 responsive to a closure event of the switch 21 and responsive to the CPU 40 via a writable register bit within the microcontroller U2, which can be written by the CPU 40. The microcontroller U2 is powered by AUX5; therefore, the microcontroller U2 is always powered, executing code, and controlling the system. If the power supply 17 is not providing regulated power to the system through the ±5 VDC and ±12 VDC lines and either (i) the switch 21 is pressed or (ii) one of the external events occurs, then the microcontroller U2 asserts the ON signal, thereby causing the power supply 17 to provide regulated power to the system through the ±5 VDC and ±12 VDC lines. The microcontroller continues asserting the ON signal after the switch 21 is released.

As a backup system, the power supply 17 can also be turned on under the direct control of the user via the pushbutton 21. This option will typically only be used if the microcontroller U2 ceases functioning as expected, as will be evidenced by the system not powering up responsive to a press of the power button 21. As shown in FIG. 6A, the switch 21 also controls the ON# line of the power supply 17 via the diode CR2, the MOSFET Q1, the resistor R7, and the connector JP2. Normally the pushbutton 21 is open and the SWITCH line is pulled to a logical ZERO through R1 and MOSFET Q1 does not conduct; therefore the ON# line (pin 2 of JP2) is pulled to a logical ONE (AUX5) by resistor R7, and the power supply 17 is not providing regulated power through the ±5 VDC and ±12 VDC lines. When the pushbutton 21 is pressed and held by the user, the SWITCH line is pulled to a logical ONE and MOSFET Q1 conducts, thereby pulling the ON# line (pin 2 of JP2) to a logical. ZERO (GND), thereby causing the power supply 17 to begin providing regulated power through the ±5 VDC and ±12 VDC lines. With the button 21 still held in, after the system is powered, the BIOS causes the CPU 40 to test whether the microcontroller U2 is still functioning. If not, the CPU 40 resets the microcontroller U2, which, after being reset, detects that the switch 21 is being pressed. Consequently, with the button 21 still held, the microcontroller asserts the ON signal and the user can finally release the switch 21 with the knowledge that the microcontroller is now controlling the power supply 17. To use this backup option, the user must press the button 21 for a period of time on the order of seconds—approximately two seconds after the logo appears.

The microcontroller U2 only turns off the system responsive to either (i) the switch 21 being pressed or (ii) the CPU 40 commanding the microcontroller to turn off the system. To the microcontroller, these events are the same, because the microcontroller is configured such that a switch press can be caused either by a closure event of the switch 21 or by the CPU 40; a hardware button press/release is treated virtually the same as a software button press/release. The microcontroller U2 only turns off the system without a command by the CPU if the Suspend Enable Flag in the microcontroller U2 is cleared. In this case, when the system is powered and the Suspend Enable Flag is CLEARed, responsive to a closure event of the switch 21, the microcontroller U2 clears the ON signal, thereby causing the power supply 17 to cease providing regulated power to the system through the ±5 VDC and ±12 VDC lines. The ON signal remains cleared after the switch 21 is released.

The microcontroller U2 also turns off the system responsive to a command by the CPU, as would be issued after a the system state has been successfully saved to the hard disk drive (suspended). Responsive to such a command, the microcontroller U2 clears the ON signal, thereby causing the power supply 17 to cease providing regulated power to the system through the ±5 VDC and ±12 VDC lines.

The microcontroller U2 can also detect and affect the system when certain external events occur. The EXT_RING signal is input at pin 7 (P0.1) and allows the microcontroller U2 to detect a ring from the powered external modem 902. As known to those skilled in the art, typical external modems supply a ring signal that toggles to a logical ONE in the well known RS-232C format when a ring signal is detected across the tip and ring telephone lines. This signal is interfaced to the microcontroller U2 via diode CR6 and divided with resistors R10 and R11 and finally input into the microcontroller U2 via the EXT_RING line. The toggling signal is sampled every 25 milliseconds and analyzed by the microcontroller U2, which deems that a ring is present

Qualcomm Ex. 1008 - 63/84

whenever this input is a logical ONE for two consecutive samples. Responsive to this condition being met, the microcontroller U2 asserts the ON signal, thereby causing the power supply **17** to being providing regulated power to the system through the ±5 VDC and ±12 VDC lines. For the EXT_RING signal to be used to detect an incoming telephone call, an externally powered modem **902** must be present.

In the alternative, another device that provides a binary signal conforming to the RS-232 specification (or close enough that it asserts the EXT_RING signal) can be interfaced to the EXT_RING line and used to awaken the system, for example, motion sensors, burglar alarm sensors, voice activated sensors, light sensors, infrared light sensors;, "clapper" type sensors, etc .

As shown in FIGS. **6**A and **6**B, the present embodiment also has a provision for detecting a telephone ring signal from an internal modem **900** having an optoisolator OPTO**1** based ring-detect circuit. Many suitable optoisolators are manufactured by e.g., Hewlett Packard, and widely available from numerous sources. The internal modem **900** can either be designed into the circuitry of the system planar **20** or placed into one of the expansion slots **78**. In the latter case, the modem **900** must be modified to provide a Berg or similar connector to allow the signal from the optoisolator OPTO**1** to be electrically connected to the circuitry of the power management circuitry of FIG. **6**A. Many manufacturers of modems are modifying their internal modems to provide a connector suitable for use with the circuitry of the present invention. The EXT_WAKEUP# signal is input at pin **4** (P**0**.2) of the microcontroller U2 and is used to input a signal from the ring-detect optoisolator OPTO**1** from the internal modem **900**. This signal is interfaced via resistors R**9** and R**5**, diode CR**6**, and capacitor C**9** and finally input into the microcontroller U2 via the EXT_WAKEUP# line.

The threshold and protection portion **905** of the internal modem **900** is connected to the standard Tip and Ring telephone lines, and (i) provides protection from lightning and other electrical events that might damage the modem **900** and (ii) sets the ring threshold voltage, as known to those skilled in the art of modem design.

The toggling signal from the optoisolator OPTO**1** is detected and analyzed by the microcontroller U2, which deems that a ring is present whenever three (3) consecutive signal periods of the signal on EXT_WAKEUP have a frequency of between 15.1 Hz and 69.1 Hz. Unlike the EXT_RING signal circuit, which must be powered to provide the ring signal along EXT_RING, the internal modem **900** need not be powered for the optoisolator OPTO**1** to supply a suitable signal along the EXT_ WAKEUP# line, which is normally pulled up to AUX**5** by R**5**.

The microcontroller U2 can interrupt the CPU **40** via the CPU's system management interrupt (SMI), if the CPU **40** has an SMI (the CPU **40** need not have an SMI for the system to take advantage of many of the benefits of the present invention). The SMI_OUT# signal is output at pin **3** (P**3**.2) of the microcontroller U2 and allows the microcontroller U2 to immediately interrupt the CPU **40** without waiting for the operating system to validate or otherwise allow the interrupt. The state of the SMI_OUT# line is controlled by a writable register bit, which can be written by the CPU **40**, located within the microcontroller U2. In addition the microcontroller U2 can assert the SMI_OUT# signal and thereby interrupt the CPU **40** (i) responsive to activity being detected on the ACTIVITY# line or (ii) before the microcontroller U2 causes the power supply **17** to stop providing regulated power to the system. Either or both of these events can be enabled and disabled by commands from the CPU to the microcontroller U2.

Each SMI, the microcode in the CPU **40** saves the state of the CPU to the special CPU state save area to or from memory. Thereafter, the CPU **40** executes the SMI interrupt handler, which performs the functions below. To restore the state of the CPU, the SMI interrupt handler issues the RSM (resume) instruction, which causes the CPU **40** to restore its own state from the special save area.

Before the CPU **40** causes the microcontroller U2 to interrupt the CPU **40** via the CPU's SMI, the CPU **40** writes a value to a variable in CMOS NVRAM indicating the reason for the SMI. This value in CMOS NVRAM defaults to **00**H, which indicates to the CPU **40** that the microcontroller U2 is interrupting the CPU **40** asynchronously, as occurs before the microcontroller U2 causes the power supply **17** to stop providing regulated power. After each SMI, the CPU **40** sets that variable in CMOS NVRAM to **00**H. Responsive to this value, the CPU **40** performs certain tasks under the assumption that the system is going to be powered down imminently by the microcontroller U2. The CPU **40** can extend the period of time before which the microcontroller U2 powers down the system by periodically restarting the power down extend timer within the microcontroller U2.

During this period of time before the system powers down, the CPU **40** can perform numerous tasks. For example, since the user may have changed one or more of the parameters that affect the wake alarm, the CPU recalculates and writes to the microcontroller U2 a fresh minutes to wake value. In addition, the CPU writes to the CMOS NVRAM certain information that is to be written to the hard drive **31** later, such as the period of time the computer system was operating since its last power on.

Other values written by the CPU **40** include **01**H, which indicates that the CPU **40** is to jump to the Suspend Routine at **254**; **02**H, which indicates that the CPU **40** is to jump to the Resume Routine at **454**; and **0**FFH, which indicates that the CPU **40** is to set up the special CPU state save area in the segment E**000**H data structure.

In the present embodiment, the microcontroller is given control over blanking the display **11**. The DISP_BLANK signal is output via pin **1** (P**3**.4) of the microcontroller U2 and directly controls the blanking of the display **11**. Two inverters U**3**D and U**3**E interface the DISP_BLANK signal with the ESYNC# and BLANK# lines. With the ESYNC# and BLANK# lines at a logical ONE (VCC), the video controller **56** generates a video signal. When BLANK# and ESYNC# are at a logical zero (GND) the video controller **56** ceases generating the video signal. The state of the DISP_ BLANK line is controlled by a writable register bit, which can be written by the CPU **40**, located within the microcontroller U2. The CPU **40** instructs the microcontroller U2 to blank the display when the system enters the standby state **152**. In addition, the DISP_BLANK line is sequentially SET then CLEARed responsive to closure events of the switch **21**. Similarly, activity at any one of the activity interrupts, in this case INT**1** and INT**12**, causes the microcontroller to CLEAR the DISP_BLANK line, thereby allowing the video controller **56** to generate the video signal.

In addition, the microcontroller U2 controls the frequency of the clock signals generated by the clock synthesizer **906**. Three Berg-type jumpers (not shown) JP**0**, JP**1**, and JP**2** control the clock synthesizer as follows: when JP**0**=0, JP**1**= 1, and JP**2**=0, the clock synthesizer generates a 33 MHz clock signal; when JP**0**=1, JP**1**=1, and JP**2**=0, the clock

Qualcomm Ex. 1008 - 64/84

synthesizer generates a 25 MHz clock signal; and when JP0=0, JP1=1, and JP2=1, the clock synthesizer generates an 8 MHz clock signal. The clock synthesizer **906** is further controlled by three clock lines CLK0, CLK1, and CLK2, which correspond to JP0, JP1, and JP2. As shown in FIG. 6A, these clock lines CLK0, CLK1, and CLK2 are controlled by the microcontroller U2 via the CLK_SLOW# signal, which is output at pin 2 (P3.3) of the microcontroller U2. As shown, the CLK_SLOW# signal is doubly inverted by the inverters with open collector outputs U3A, U3B, and U3C. Also, resistors R15 and R8 are pullup resistors used to pull the open collector output of U3A and the CLK0 input to the clock synthesizer **906** to a logical ONE, respectively.

The three clock signals CLK0, CLK1, and CLK2 and the three jumpers JP0, JP1, and JP2 control the clock synthesizer as follows: when the CLK_SLOW# signal is a logical ONE, the CLK1 and CLK2 signals are also a logical ONE and, consequently, the clock synthesizer **906** is controlled by the jumpers JP1, JP2 and generates the higher 25 MHz or 33 MHz clock signal for use by the system. On the other hand, when the CLK_SLOW# signal is a logical ZERO, the CLK1 and CLK2 signals are also a logical ZERO and, consequently, the clock synthesizer **906** generates the lower 8 MHz signals for use by the system, thereby causing the system to consume less power. As shown in FIG. 6A, a Berg-type jumper separates the CLK_SLOW# line from the CLK0 line. If a jumper is in place, the CLK0 line follows the CLK_SLOW# signal. On the other hand, if no jumper is in place, the CLK0 line remains pulled to a logical ONE by resistor R8 regardless of the state of the CLK_SLOW# signal. The state of the CLK_SLOW# line is controlled by a writable register bit, which can be written by the CPU **40**, located within the microcontroller U2. In addition, the CLK_SLOW# line can be cleared by the microcontroller U2 in response to activity at the ACTIVITY# line. As is apparent to those skilled in the art, other clock synthesizers can be used in the present invention; the interconnections between the microcontroller U2 and the clock synthesizer might need to be changed to match the specific specifications of the particular synthesizer used.

Additionally, the microcontroller U2 directly controls the illumination of the power/feedback LED **23**. The LED_CNTRL signal is output at pin **22** (P3.6) and allows direct control of the power/feedback LED **23** by the microcontroller U2. The resistors R2 and R3 and diodes CR4 and CR5 allow the power/feedback LED **23** to be driven by either the AUX5 power line or the VCC power line in response to the LED_CNTRL line being at a logical ZERO. When the LED_CNTRL line is at a logical ONE, the power/feedback LED **23** is not illuminated. As described more fully below, the state of the LED_CNTRL line is controlled by the microcontroller U2 in response to a closure event of the switch **21**, in response to the wake alarm, in response to one or more rings at either ring-detect input, or in response to the system being placed in the standby mode.

The microcontroller U2 can control the LED **23** to be a simple power LED. As such, the LED **23** is illuminated after a closure event of the switch **21** that causes the system to change from either the off state **156** or the suspend state **154** to the normal operating state **150**. Likewise, the microcontroller U2 extinguishes the LED **23** after a release event of the switch **21** that causes the system to change from the normal operating state **150** to either the suspend state **154** or the off state **156**.

In addition, the LED **23** can be selectively flashed at a particular rate, e.g., every second, by the microcontroller U2 to indicate that the system is in the standby state **152**. In addition, the LED **23** can be selectively flashed at a different rate, e.g., every half-second, by the microcontroller U2 to indicate that the system was awakened by a ring or by the alarm and the system is in either the off state or the suspend state. In the alternative, while in the suspend state, the LED **23** can be selectively flashed in groups of flashes by the microcontroller U2 to indicate the number of times the system was powered up by external events, such as a ring, alarm, etc., and was powered back down by the expiration of the inactivity suspend timer. In this case, the BIOS is provided with one or more functions to allow the OS and application programs to modify the number of times the microcontroller U2 is to flash the LED **23**. For example, if the system is awakened by a ring and an incoming facsimile transmission is received, the telecommunications application program can call the particular BIOS function to add one to the number of flashes. Thereafter, the BIOS causes the CPU **40** to write the new flash value to the microcontroller U2, which then causes the LED **23** to flash the commanded number of times.

The POWERGOOD signal is input at pin 4 (P3.1) of the microcontroller U2 and allows this signal to be used by the microcontroller U2 and the CPU **40**. Specifically, the microcontroller uses the POWERGOOD signal to implement a feedback-based fault detection and correction circuit to determine if the power supply **17** has faulted and to clear the faulted condition. As described elsewhere in this specification, if the ON signal has been asserted for a period of time (e.g., three seconds) and the POWERGOOD signal is at a logical zero, indicating that the power supply **17** is not providing regulated voltages at proper levels, then the microcontroller U2 assumes that the power supply **17** has faulted from, e.g., an overcurrent condition. Consequently, to possibly clear the faulted condition, the microcontroller U2 ceases asserting the ON signal for a period of time (e.g., five seconds) to allow the fault to clear. Thereafter, the microcontroller U2 reasserts the ON signal and waits for the POWERGOOD signal to become a logical ONE, indicating that the power supply **17** is now providing regulated power to the system. Without this feedback-based fault detection and correction, the power supply **17** would remain faulted and the microcontroller U2 would continue to assert the ON signal in an attempt to cause the power supply **17** to begin generating regulated power. The only solution would be to remove AC power from the power supply to clear the fault.

An alternative embodiment of the power supply fault detection and correction circuit is shown in FIG. 6D. This embodiment uses four FETs Q10–Q13, resistors R20–R23, a capacitor C20, and a 74HC132 to detect when the power supply **17** is faulted and clear the fault. Q12 pulls the ON signal LOW for a period of time determined by R22 and C20, when the ON signal is HIGH, AUX5 is being powered, and VCC is below the threshold for triggering Q11, thereby clearing the fault condition in the power supply.

The ACTIVITY# signal is input at pin **19** (INT1) of the microcontroller U2 and is used by the microcontroller U2 to respond to activity at the keyboard **12** and mouse **13**. IRQ1 is the keyboard hardware interrupt signal, which is input at pin 8 (I7) of the first PAL U1; pressing a key on the keyboard **12** causes the IRQ1 signal to pulse. IRQ12 is the mouse hardware interrupt signal, which is input at pin **11** (I9) of the first PAL U1; moving the mouse **13** or pressing a button on the mouse **13** causes the IRQ12 signal to pulse. The IRQ1 and IRQ12 signals are logically Ored in the first PAL U1 and output as the ACTIVITY# signal. Using the ACTIVITY# signal allows the microcontroller U2 to never miss activity of either the keyboard **12** or the mouse **13**.

Qualcomm Ex. 1008 - 65/84

While in the standby state, activity on either interrupt causes the microcontroller to restore immediately the video display. Using the interrupts IRQ1 and IRQ12 in this manner gives the user immediate feedback in the form of a restored video display when returning from the standby state **152** to the normal operating state **154**. Without it, the user might not receive feedback until possibly seconds later when the APM checks for user activity, as explained in the text accompanying FIG. **9**.

Communications between the CPU **40** and the microcontroller U2 are performed using SD(**0**), which is input at pin **18** (I/O**6**) of the first PAL U**1** and input to the microcontroller U2 via the RWD**0** line, which is output at pin **13** (I/O**3**) of the first PAL U**1** and input at pin **13** (P**1.0**) of the microcontroller U**2**, SD(**1**), which is input at pin **14** (p**1.1**) of the microcontroller U2, SD(**2**), which is input at pin **15** (p**1.2**) of the microcontroller U2, SD(**3**), which is input at pin **16** (p**1.3**) of the microcontroller U2, SD(**4**), which is input at pin **6** (I**5**) of the first PAL U**1**, IO_STROBE#, which is input at pin **18** (INT**0**) of the microcontroller U**2**, and PROC_RDY, which is output at pin **20** (P**1.7**) of the microcontroller U**2**. The first PAL U**1** and the microcontroller U**2** are configured and programmed to provide (i) four-bit parallel writes from the CPU **40** to the microcontroller U**2** along SD(**0**) via RWD**0**, SD(**1**), SD(**2**), and SD(**3**), with one address being essentially a one-bit write to reset the microcontroller U**2** and the other being a nibble written to the microcontroller U**2** that is only valid when data bit SD(4) is HIGH, and (ii) serial (one-bit) reads from the microcontroller U**2** by the CPU **40** along SD(**0**) via RWD**0**, with one address corresponding to the status bit and the other corresponding to the data bit from the microcontroller U**2**.

Referring now to FIG. **19**, several of the routines executing on the microcontroller U**2** are shown beginning at **1160**. The microcontroller U**2** is usually executing one of two main routines: the Power On Routine, at tasks **1168** through **1216**, or the Power Off Routine, at tasks **1260** through **1308**. The Power On Routine is executed by the microcontroller U**2** when the power supply **17** is providing regulated power at the ±5 and ±12 lines or power supply **17** is not providing regulated power at the ±5 and ±12 lines, but the system is in the process of powering on. The Power Off Routine is executed by the microcontroller U**2** when the power supply **17** is not providing regulated power at the ±5 and ±12 lines or the power supply **17** is providing regulated power at the ±5 and ±12 lines, but the system is in the process of powering off. In addition, there are three interrupt-driven routines: one for communicating with the CPU **40**, at **1220** through **1232**, one for detecting activity of the mouse **13** or keyboard **12**, at **1236** through **1244**, and one that provides a time-base with 25 millisecond, half-second, second, and minute resolutions, at **1248** through **1256**.

First, the microcontroller U**2** is initialized, at **1164**, during which time all the variables are initialized, the counter variables are initialized, the timer interrupt is initialized and enabled, and external interrupts, which control the communication routine and the activity routine, are initialized.

The communication routine is an interrupt-driven routine beginning at **1220** that executes responsive to the IO_STROBE line being pulled to a logical ZERO by the first PAL U**1**, which indicates that the CPU **40** is beginning a command or query. In short, this routine receives a one- or more nibble command or query from the CPU **40**, at **1224**, implements the command and/or returns the data responsive to the query, at **1228**, and returns program execution control to the interrupted code, at **1232**.

The microcontroller sequentially receives the nibbles from the CPU that form the command or query. After receiving a nibble, the microcontroller pulls the PROC_RDY LOW. When it is ready for the next nibble, it pulls PROC_RDY HIGH again. Upon seeing this LOW to HIGH transition at PROC_RDY, the CPU **40** then can write the next command nibble.

While the microcontroller U**2** is implementing the command or query from the CPU **40**, it cannot receive another command; therefore, the microcontroller U**2** asserts the PROC_RDY line to a logical ZERO, indicating to the CPU **40** (via reads of the status port) that the microcontroller cannot accept the next command/query yet. When the implementation is finished, the PROC_RDY line is asserted at a logical ONE, indicating to the CPU **40** (via reads of the status port) that the microcontroller U**2** is ready to accept the next command/query.

The activity routine is an interrupt-driven routine beginning at **1236** that executes responsive to the ACTIVITY# line being pulled to a logical ZERO by the first PAL U**1**, which indicates that the user has used either the mouse **13** or the keyboard **12**. In short, responsive to receiving the interrupt, this routine (i) SETs a bit indicating that there was either mouse **13** or keyboard **12** activity, (ii) restores the clock speed if clock slowing is enabled, (iii) unblanks the screen **11** if blanking is enabled, (iv) restarts the failsafe timer, and (v) generates an SMI to the CPU, if enabled, at **1240**. Thereafter, the routine returns program execution control to the interrupted code, at **1244**. The bit set by this routine is then queried by the Supervisor Routine every APM "get event," as detailed elsewhere in this specification.

The timer routine is an interrupt-driven routine beginning at **1248** that executes responsive to the internal timer interrupt, which is based on a 16-bit free-running counter configured to generate the interrupt every 25 milliseconds to provide a time-base for the microcontroller U**2**. The timer routine provides the following time-bases: 25 milliseconds, half-seconds, seconds, and minutes. In short, this routine receives the interrupt, determines when the various times have occurred, performs the appropriate activity, at **1252**, and returns program execution control to the interrupted code, at **1256**.

Every tick (every 25 milliseconds), if the power supply is not providing regulated power and the microcontroller is configured to respond to rings, the timer routine checks for an RS-232 ring on the EXT_RING line and SETs a bit if one occurred.

Every half-second while in either the off state or the suspend state, the timer routine determines whether it should toggle the LED **23** to implement the awake on external ring indicator flashing sequence, detailed elsewhere in this specification.

Every second while in either the standby state, the timer routine determines whether it should toggle the LED **23** to implement the suspend indicator flashing sequence, detailed elsewhere in this specification.

Also, every second, the timer routine decrements the failsafe timer, decrements the APM fail-suspend timer, and decrements the power supply fault timer, if appropriate, and SETs a corresponding bit if any have expired. The failsafe timer is a 20-second timer that causes the microcontroller to turn the system power off when it expires. The failsafe timer is frequently restarted (reset) by the Supervisor Routine in response to APM get events; therefore, as long as the code executing on the CPU **40** is executing properly, the failsafe timer never expires. However, if the code ceases executing properly, the failsafe timer expires and, responsive to a press and release of the power button **21**, the microcontroller U**2** causes the power supply **17** to stop providing regulated

Qualcomm Ex. 1008 - 66/84

power at the ±5 and ±12 lines under the assumption that the BIOS and other routines have failed.

The APM fail-suspend timer is an 18-second timer that is enabled when the switch **21** is in the off/release state (indicating that the user is trying to turn the system off) and that causes the system to attempt to suspend when it expires, hopefully before the failsafe timer expires, causing the microcontroller to turn the system off. Like the failsafe timer, the APM fail-suspend timer is frequently restarted (reset) by the code executing on the CPU **40**, e.g., APM Get Events, APM Working on Last Request, and APM Reject Last Request; therefore, as long as the code executing on the CPU **40** is executing properly, the APM fail-suspend timer never expires. However, if the code ceases executing properly, the APM fail-suspend timer expires.

When the APM fail-suspend timer expires, the microcontroller U2 SETs a bit. This bit is checked during each timer level **0** interrupt, which occurs approximately every 55 milliseconds, as is known to those skilled in the art. In addition, the timer level **0** interrupt service routine restarts the failsafe timer. If the timer level **0** interrupt service routine detects that the APM fail-suspend timer has expired, it jumps to the Suspend Routine in an attempt to suspend the system, as described in the text accompanying FIG. **10**.

The suspend started by the timer level **0** interrupt service routine is not the preferred method of suspending. Many application programs and adapters are APM aware and perform tasks in response to the system being suspended. A suspend started by the timer level **0** interrupt service routine cannot use APM to indicate to these APM aware entities that a suspend is imminent. Consequently, the system is suspended without these entities being properly prepared. As such, the system will be saved by a suspend started by the timer level **0** interrupt service routine, therefore data in memory will not be lost; however, the user may need to reboot the machine to place the system into its proper state after saving the desired data.

The APM fail-suspend timer is particularly helpful in patching "holes" in the APM driver in the OS. For example, when a Microsoft Windows 3.1 modal dialog box is displayed, the Windows APM driver ceases issuing APM get events. Consequently, if a modal dialog box is displayed when the user presses the power button **21** in an attempt to suspend the system, the system will not suspend. The microcontroller U2 will notice that the switch is in the off/release state, but the Supervisor Routine will not be called because all APM get events have ceased. The switch press will not be acted upon until the modal dialog box is cleared by the user. However, once the APM fail-suspend timer expires and its expiration is detected by the timer level **0** interrupt service routine, the system state will be saved to the extent possible without indicating to APM aware entities that the system is being suspended.

Every minute, the timer routine decrements the minutes to wake alarm timer and the activity timer. When the minutes to wake timer expires, if enabled, the microcontroller causes the power supply **17** to begin providing regulated power at the ±5 and ±12 lines.

After the microcontroller U2 is initialized, the power supply is tested, at **1168**, to determine whether the power is off. If the power is still on, the microcontroller **17** checks to see of the power supply **17** is faulted, at **1172**. The power supply **17** has several internal protections that cause it to shut down or "fault." The microcontroller U2 determines whether the power supply **17** is faulted as follows: if the microcontroller is operating (indicating that AUX**5** is powered, i.e., AC power is being provided to the power supply **17**), AND the microcontroller U2 is asserting the ON signal in an attempt to cause the power supply **17** to provide regulated power at the ±5 and ±12 lines, AND the POWERGOOD line is not asserted (indicating that the power supply **17** is not providing regulated power at the ±5 and ±12 lines), then the power supply **17** is faulted and must be reset.

At task **1172**, the power supply **17** is actually tested twice. The microcontroller U2 asserts the ON signal and then waits for three seconds, as measured by the internal time-base. If the POWERGOOD signal is not asserted after ON has been asserted for three seconds, then the microcontroller U2 clears the ON signal and waits for another five seconds. Then it asserts the ON signal again and waits for another three seconds. If the POWERGOOD signal is not asserted after ON has been asserted for three seconds, then the microcontroller U2 clears the ON signal deems the power supply **17** faulted.

If the power supply is faulted, the microcontroller U2 jumps to the Power Off Routine, as indicated at **1174**. On the other hand, if the power supply is not faulted or is off, the microcontroller causes the power supply **17** to begin providing regulated power at the ±5 and ±12 lines, at **1175**, and initializes the I/O ports, turns on the LED **23**, and enables external interrupts, at **1176**.

FIG. **7** shows the switch state machine maintained within the microcontroller U2. As shown in that figure, the states change in response to closure events of the switch **21** and other events, such as resetting of the computer system **10** and writes by the CPU **40**. With AUX**5** not being provided by the power supply **17**, the microcontroller U2 is not being powered and, therefore, the switch state is meaningless, at **174**. A press of the switch **21**, a telephone ring from either source, the minutes to alarm timer expiring, and a command from the CPU **40** cause microcontroller to cause the power supply **17** to begin providing system power, as described in the text accompanying FIG. **6**.

As shown in FIG. **7**, the switch **21** has four states monitored by the microcontroller U2: (i) the on/press state **176** (in which the user is holding in the button and is trying to turn on the machine), (ii) the on/release state **178** (in which the user has released the button and is trying to turn on the machine), (iii) the off/press state **180** (in which the user is holding in the button and is trying to turn off the machine), and (iv) the off/release state **182** (in which the user has released the button and is trying to turn off the machine). Next, at **1180**, the microcontroller U2 tests whether the switch is in the off/release state, indicating that the user has released the button and is trying to turn off the machine.

When in state **174** and the switch **21** is pressed, the microcontroller U2 enters the on/press switch state **176**. Releasing the switch **21** causes the microcontroller U2 to enter the on/release switch state **178**. Similarly, when the microcontroller U2 is reset, the microcontroller U2 enters the on/release state **178**. Pressing the switch **21** again causes the microcontroller U2 to enter the off/press switch state **180**. Releasing the switch **21** again causes the microcontroller U2 to enter the off/release switch state **182**. Subsequent closures of switch **21** causes the microcontroller U2 to cycle through the four states, as shown in FIG. **7**. The microcontroller U2 is in the on/release switch state **178** when the computer system **10** is in the normal operating state **150**. Application programs will execute while in that state. The system **10** may enter and leave the standby state **152** in that state. This state also corresponds to a user-generated suspend abort request. The off/release switch state is the switch state corresponding to a suspend request by the user. That is, starting with the system in the off state **156**, pressing and

Qualcomm Ex. 1008 - 67/84

releasing the switch **21** once places the computer system in the normal operating state **150**. Pressing and releasing the switch **21** once again generates a suspend request, which is read by the Supervisor Routine, which is discussed more fully in the text accompanying FIG. **9**. Pressing and releasing the switch **21** a third time, before the system **10** is in the suspend state **154**, generates a suspend abort request, which is read by the Suspend Routine.

Referring back to FIG. **19**, if the user has released the button and is trying to turn off the machine, then the microcontroller U2 jumps to the Power Off Routine, as indicated at **1184**.

On the other hand, if the button is in the off/press state, indicating that the user is holding in the button and is trying to turn off the machine, then, the microcontroller tests whether the switch has been masked by the BIOS, at **1192**. The BIOS masks the switch **21** once on entry into standby to prevent a switch press from forcing the system from the standby state to the suspend state, to prevent user confusion, as explained elsewhere.

If the switch **21** has been masked by the BIOS, then the microcontroller code jumps back to task **1176** and clears the mask bit to allow the next switch press to cause the system to enter either the off state or the suspend state. On the other hand, if the switch **21** has not been masked, or if the switch **21** is not in the off/press state, the microcontroller executes the heartbeat routine, at **1196**.

The heartbeat routine is used to indicate to the CPU **40** that the microcontroller U2 is functioning properly. The CMD_STATE# line output of the microcontroller (pin **17**, P1.4) is normally a logical ONE. Every 50–60 microseconds, the microcontroller U2 pulls that line to a logical ZERO for approximately 1.5 microseconds and then raises it back to a logical ONE. Since the power management status port read by the CPU **40** is the logical AND of the CMD_STATE# and PROC_RDY lines, this transition from HIGH to LOW and back to HIGH can monitored every so often by the CPU **40**, e.g., as the system boots, to ensure the microcontroller U2 is functioning properly.

Next, the microcontroller U2 tests whether the BIOS has commanded a power-off, at **1200**. The CPU **40** can access and alter virtually every variable in the microcontroller U2. If the BIOS has set the variable indicating that the system should be powered off, as e.g., after the state of the system is written to the hard drive **31** during a suspend, the microcontroller U2 jumps to the Power Off Routine, as indicated at **1204**.

On the other hand, if the BIOS has not commanded a power off, then the microcontroller executes the Failsafe Routine, at **1208**. The failsafe timer is a 20-second timer that is enabled when the power supply **17** is providing regulated power at the ±5 and ±12 lines. This routine checks whether the failsafe timer has expired and SETs a bit if it has. This routine also restarts the failsafe timer if commanded by the BIOS to do so.

Next, at **1212**, as a safety measure and to synchronize the microcontroller to the power supply **17**, the microcontroller checks the POWER_GOOD line to detect whether the power supply **17** is still providing regulated power at the ±5 and ±12 lines.

If the power supply **17** is not providing regulated power at the ±5 and ±12 lines, then the microcontroller U2 jumps to the Power Off Routine, as indicated at **1216**. On the other hand, if the power supply **17** is providing regulated power at the ±5 and ±12 lines, then the microcontroller code jumps back to task **1180** and continues execution.

The Power Off Routine begins at task **1260**. First, the microcontroller U2 disables the activity interrupt at **1264** to prevent the display from being unblanked.

Next, at **1268**, the microcontroller checks the POWER_GOOD line to detect whether the power supply **17** is still providing regulated power at the ±5 and ±12 lines. If the power supply **17** is providing regulated power at the ±5 and ±12 lines, then the microcontroller U2 tests whether the display should be blanked and/or the LED **23** turned off, at **1272**. If so, the microcontroller U2 causes the video controller **56** to cease generating the video signals and/or turns off the LED **23**.

Thereafter, or if the LED and display are not to be blanked, the microcontroller next tests whether (i) the BIOS hats commanded that the system should be turned back on by setting a bit, or (ii) the user has commanded that the system should be turned back on by pressing the power button **21** again. If either of these have occurred, then the system is to be powered back up and the microcontroller U2 jumps to the Power On Routine, as indicated at **1284**.

Next, the microcontroller determines whether a ring has occurred at the EXT_WAKEUP# line from the optoisolator OPTO1. With the RS-232 line this involves merely checking if the EXT_RING line is HIGH. For the signal from the optoisolator OPTO1, this involves more checking by the microcontroller U2. The EXT_WAKEUP# line is normally pulled HIGH by the resistor R5. The optoisolator OPTO1 pulls this line LOW when the voltage across Tip and Ring is higher than the voltage threshold set by the threshold and protection portion **905**, e.g., 60 V, as when the telephone line rings. However, this condition can also be met when the phone line is tested or from noise on the line. Therefore, merely waiting for a LOW at the EXT_WAKEUP# line might permit a false "ring" to awaken the system.

Consequently, the microcontroller determines whether the signal is a ring by measuring the frequency of the ring. A ring within standards is a signal between 16 Hz to 58 Hz. The microcontroller U2 measures the three periods of time between four rising edges of the EXT_WAKEUP# signal and if all three correspond to a frequency of between 15.1 Hz and 69.1 Hz, the microcontroller U2 deems that a proper ring has occurred at that line and SETs a corresponding bit.

The checking routine is started by a LOW being detected at the EXT_WAKEUP# line. If that line is LOW for three consecutive reads, then the microcontroller U2 waits for the line to return HIGH for three consecutive reads. Immediately thereafter, the 16-bit counter that forms the basis for the timer interrupt is read and the value stored and the microcontroller U2 waits for the line to transition LOW for three consecutive reads. The microcontroller next tests whether the time between the first two rising edges is between 15 milliseconds and 66 milliseconds, indicating that the signal is between 15.1 Hz and 69.1 Hz. If so, the high-resolution counter is sampled again and the microcontroller calculates the difference between the two counter samples as it waits for the next LOW to HIGH transition. The process repeats for the next two LOW to HIGH transitions on the EXT_WAKEUP# line. If all three periods of time are within the range, then the microcontroller U2 deems that a proper ring has occurred at that line and SETs a corresponding bit. If there is no LOW at the EXT_WAKEUP# line or if any of the periods of time are out of that range, the microcontroller code continues without setting the bit.

Next, the microcontroller tests whether there has been a ring or the minutes to wake alarm has expired, at **1286**. For the RS-232 ring, the optoisolator ring, or the minutes to wake alarm, this involves the microcontroller U2 testing whether the associated bit is SET.

If either there has been a ring or the minutes to wake alarm has expired, then the system is to be powered back on and

Qualcomm Ex. 1008 - 68/84

the microcontroller U2 jumps to the Power On Routine, as indicated at **1287**.

Thereafter, at **1288**, the microcontroller tests whether the power supply **17** is providing regulated power at the ±5 and ±12 lines. If not, the code jumps back to task **1280** and begins the loop again. On the other hand if the power supply **17** is providing regulated power at the ±5 and ±12 lines, then the microcontroller U2 executes the heartbeat routine, at **1292**, and the failsafe routine, at **1296**. These two routines were discussed in the text accompanying tasks **1196** and **1208**, respectively.

The microcontroller U2 only causes the power supply **17** to stop providing regulated power at the ±5 and ±12 lines under three situations: (i) the BIOS has commanded an immediate power-off, which is implemented in the communications routine, (ii) the failsafe timer has expired, or (iii) the user presses the power button and the Suspend Enable flag in the microcontroller U2 is not SET, a condition for which the microcontroller U2 tests every time the SWITCH input is read. Therefore, the microcontroller tests whether the failsafe timer has expired, at **1300**. If not, the code jumps back to task **1280** and begins the loop again.

On the other hand, if the failsafe timer has expired, indicating that the system is to be powered down, the microcontroller U2 generates an SMI to the CPU **40**, at **1304**, if enabled. This allows the CPU to perform certain tasks under the assumption that the system is going to be powered off immediately thereafter. For example, the CPU **40** recalculates and writes to the microcontroller U2 an updated minutes to wake alarm value.

If no further action is taken by the CPU **40**, the microcontroller powers off the system after a programmable SMI timer expires. The CPU **40** can extend this period of time by restarting the SMI timer by writing an appropriate value to the microcontroller U2.

Thereafter, and if the test at **1268** indicates that the power supply is not supplying good power, the microcontroller U2 powers the system down, at **1308**. This involves (i) causing the power supply **17** to stop providing regulated power at the ±5 and ±12 lines, (ii) disabling the communications interrupt since the CPU **40** is about to lose power, (iii) setting the output ports (except ON) HIGH to minimize their power consumption (SWITCH, EXT_RING, EXT_WAKEUP, etc. can still be read by the microcontroller U2 in this mode), (iv) setting the power-off variable so the remaining routines are aware that the power to the system is off, and (v) changing the switch state to off/release so that the next switch press will turn the system back on.

Thereafter, the code jumps back to task **1280** and begins the loop again, waiting for a ring, for a switch press, for the BIOS to command it to awaken the system, or for the minutes to wake alarm to expire.

System Software

Having described the hardware aspects of the computer system **10** of the present invention, the code aspects remain to be described.

Referring now to FIG. **8**, a general overview of the power-up routine is shown. The routine starts at **200** when the CPU jumps to and executes the code pointed to by the Reset Vector. This occurs each time the CPU is powered up and whenever the CPU is reset by either a reset hardware signal or when a RESET instruction is executed by jumping to the code pointed to by the reset vector. Such reset procedures are well known in the art.

First of all, the flow of the Power Up Routine depends on why the machine was powered up. As will be explained in more detail in the text accompanying FIG. **11**, the system **10** might have been powered up by a brownout or blackout. As such, it would be improper to allow the system to remain on. Therefore, the Power Up Routine first determines if the system should remain on, at **940**. If the system was improperly powered up, then the CPU **40** commands the microcontroller U2 to cause the power supply to stop providing regulated power to the system, at **942**.

One test performed in determining whether the system is to remain powered is to confirm that the telephone line is ringing if the system was powered up responsive to what the microcontroller thought was a ring. Specifically, after powering the system up, if the system was awakened in response to a ring, while the system waits for the hard disk within the hard drive **31** to spin up, the CPU **40** queries the modem **900** or **902** which are now fully powered) whether it detects a ring signal as well. If not, then the system powers down. If the modem **900** or **902** also detects a ring signal, then the system is to remain the booting process continues.

Assuming the system is to remain powered, in general, the flow of the Power-Up Routine depends on whether the system is in the off state **156** or the suspend state **154**. That is, whether the Suspend Flag is cleared or set, respectively, in CMOS NVRAM **96**. As shown at **202**, the system **10** determines whether it is in the off state **156** or the suspend state **154** by reading a Suspend Flag from the nonvolatile CMOS memory **96**. When the system leaves the normal operating state **150** to either the off state **156** or the suspend state **154**, each routine either SETs or CLEARs the Suspend Flag in NVRAM **96**. If the Suspend Flag is SET in NVRAM **96**, then the computer system **10** is in the suspend state **154** and the state of the computer system **10** was stored in the fixed disk storage device **31**. On the other hand, if the Suspend Flag is CLEAR in NVRAM **96**, then the computer system **10** is in the off state **156** and the state of the computer system **10** was not stored in the fixed disk storage device **31**. Thus, if the Suspend Flag is SET in NVRAM **96**, then the computer executes a "normal" boot routine, shown at tasks **204–210**. The first task is the power-on self-test (POST), as shown at **204**, which will be explained more fully in the text accompanying FIG. **11**; after returning from the POST, the CPU **40** calls the PBOOT routine to load the operating system, as shown at **206**.

The PBOOT routine is a typical routine that runs on IBM computers, with slight variations, which will be explained below. PBOOT determines from where to boot (either from the hard drive **31** or from a disk inside the floppy drive **27**) and loads the operating system, which analyses and implements system changes as instructed by the CONFIG.SYS file, and finally executes the AUTOEXEC.BAT batch file. The PBOOT routine is well known in the art. The OS loads an APM device driver, which queries the BIOS whether the BIOS is APM aware. If so, the BIOS APM routine and the OS APM routine perform a handshaking and thereafter cooperate to provide the various features described herein. The operating system executes code indefinitely, as instructed by the user, as shown at **210**. However, the consequence of informing the API of the Supervisor Routine is that the APM BIOS and APM OS cause the Supervisor Routine to execute in "parallel" with the executing programs, as indicated at **212**. That is, the system **10** is a time-multiplexed multitasking system and the APM Get Event, and consequently the Supervisor Routine, are executed periodically. The end result is that the Supervisor Routine is executed approximately every second. The Supervisor Routine will be explained fully in the text accompanying FIG. **9**. After the normal boot routine **204–210** is finished, the computer system **10** is in the normal operating state **150**, as discussed in the text accompanying FIG. **4**.

Qualcomm Ex. 1008 - 69/84

Referring again to task **202**, if the Suspend Flag is SET in NVRAM **96**, then the system state was saved to the hard drive **31** and the system **10**, performs a resume boot routine, shown at tasks **214–220**. First, the system, executes an abbreviated POST, as indicated at **214**. The abbreviated POST will be explained more fully in the text accompanying FIG. **11**. After the abbreviated POST, the system calls the Resume Routine, as shown at **216**. The Resume Routine will be detailed in the text accompanying FIG. **12**. Suffice it to say that the Resume Routine restores the state of the computer system **10** back to its configuration before the system **10** was suspended. Unlike the normal boot routine, indicated at tasks **204–210**, the resume boot routine does not need to inform the APM API of the existence of the Supervisor Routine, because the APM routine must have been running to suspend the system and when the system state is restored, the APM is loaded back into memory. Thus, when the Resume Routine is finished restoring the state of the system **10**, the APM is already in place and running in "parallel" with the restored code, as indicated at **212** and **220**. After the resume boot routine **214–220** is finished, the computer system **10** is in the normal operating state **150**, as discussed in the text accompanying FIG. **4**. Thus, after either the normal boot routine **204–210** or the resume boot routine **214–220** are executed, the computer system **10** is in the normal operating state **150**.

FIG. **9** is a flow chart showing the details of the Supervisor Routine, which is called by the APM approximately every second during a "Get Event." Different operating systems will perform a Get Event at different frequencies.

The Supervisor Routine starts at **222** in FIG. **9**. The text below assumes that the computer system **10** starts in the normal operating state **150**. The first task is to test whether the user pressed the switch **21**, at **224**. The switch **21** is tested by the CPU **40** querying the microcontroller U2, as described more fully in the text accompanying FIG. **6**A and FIG. **7**.

If the test at task **224** indicates that the user pressed the switch **21**, then the Supervisor Routine next determines whether a Suspend Request was previously issued to the APM device driver in the OS, at **950**.

If the test at task **950** indicates that a Suspend Request has not already been sent to the APM driver, then the Supervisor Routine issues a "Suspend Request" to the OS APM device driver, at **226**, and then returns to the APM driver, at **228**. In response to the SET "Suspend Request" APM Return Code, the APM driver broadcasts the imminent suspend so that APM aware devices can perform any necessary system tasks (such as synching the hard disks) and then issues the "Suspend Command," which causes the APM BIOS Routing Routine to call the Suspend Routine. The Suspend Routine is described in the text accompanying FIG. **10**. The Suspend Routine essentially causes the system **10** to leave the normal operating state **150** and enter the suspend state **154** and may return control to the Supervisor Routine after several instructions (if the system is not ready to be suspended) or several minutes, hours, days, weeks, or years later (if the system is suspended and resumed). The Suspend. Routine always SETs the "Normal Resume" APM Return Code, whether the Suspend Routine returns without suspending, or returns after a complete suspend and resume.

At task **224**, more often than not, the switch **21** was not pressed and the Supervisor Routine then moves on to task **952** to determine if a Critical Suspend Flag is SET. Likewise, if a Suspend Request was previously sent to the APM driver in the OS, then the Supervisor Routine then moves on to task **952** to determine if a Critical Suspend Flag is SET.

If the Critical Suspend Flag is SET, then the Supervisor Routine next tests whether a Critical Suspend Request was previously issued to the APM driver, at **954**.

If a Critical Suspend Request was not issued to the APM driver, then the Supervisor Routine issues the Critical Suspend Request APM Return Code, at **956**, and then returns to the APM driver, at **958**. In response to the Critical Suspend Request, the APM driver suspends the system immediately, without broadcasting the imminent suspend; therefore, APM aware devices cannot perform their respective pre-suspend tasks.

If either the Critical Suspend Flag is not SET, at **952**, or the Critical Suspend Request was already issued to the APM driver in the OS, at **954**, the Supervisor Routine next determines whether a Suspend has been pending for more than 15 seconds, at **957**. If so, the Supervisor Routine SETs the Critical Suspend Flag, at **958**, thereby causing the test at task **954** to be tested during the next APM Get Event.

Thereafter, or if a Suspend has not been pending for more than 15 seconds, the Supervisor checks to see if a Suspend is pending, at **959**. If so, the CPU **40** causes the microcontroller U2 restarts (resets) the failsafe timer and the APM fail-suspend timer, at **960**.

Thereafter, or if a Suspend is not pending, the Supervisor Routine next moves on to task **230** to check to see if the system just resumed. If the Suspend Routine is called, then the system thinks it has just been resumed, whether the Suspend Routine returns without suspending, or returns after a complete suspend and resume. The resume is tested at **230** and if the system was just resumed (or the suspend was not performed due to DMA or file activity) a "Normal Resume" APM Return Code is issued at **232** and returned to the APM at **234**. In response, the APM OS driver updates the system clock and other values that may have become :stale during the interim.

More often than not, the system **10** was not just resumed and the Supervisor Routine then moves on to task **236** to test for any user activity. Three types of user activity are tested at task **236**: hardfile **31** activity, keyboard **12** activity, and mouse **13** activity. Every APM Get Event, the Supervisor Routine reads values for the hardfile head, cylinder, and sector from the hard drive **31**, queries the microcontroller U2 whether there was any activity on the either the mouse interrupt line or the keyboard interrupt line, either of which indicates user activity, and reads the minutes value from the real-time clock **98**, which ranges from 0 minutes to 59 minutes then wraps back to 0 minutes at the start of each hour. The three hard drive activity variables (head, cylinder, and sector) and the minutes value are stored temporarily. The three hard drive activity variables are then compared to the hard drive activity variables saved from the previous Get Event. If the three current hard drive values are the same as the values from the previous Get Event, and if there has been no activity on either the mouse interrupt or the keyboard interrupt, then there has been no user activity. If the hard drive values are different, or there was activity on either the mouse interrupt or the keyboard interrupt, then there has been user activity and the current disk drive activity variable values are saved for comparison to the values read during the next Get Event.

The above activity-detection scheme is such that a routine executes on the CPU to determine hard drive activity and only two hardware interrupts are monitored for activity. Alternatively, activity could be monitored exclusively in a hardware fashion. For example, all the 16 hardware interrupt lines could be monitored for activity.

If there was activity, then the Supervisor Routine next determines whether the computer system **10** is in the standby

state **152** by testing the standby flag, at **238**. If the standby flag is SET, indicating that the system **10** is in the standby state **152**, then the Supervisor Routine exits the standby state **152** and enters the normal operating state **150**, at **240**. The Supervisor Routine exits the standby state **152** by powering back up the devices that were powered down when the standby state **152** was entered, as shown in FIG. **18**. In short, as the system exits the standby state **152**, the Supervisor Routine restores the video signal, spins up the hard disk within the hard drive **31**, restores the system clock, disables APM CPU Idle calls so that CPU Idle calls from the APM driver no longer halt the CPU **40**, and clears a flag indicating that the system **10** is in the Standby State **152**.

Additionally, if there was activity, then the minutes value from the real-time clock **98** is also saved for comparison to the minutes value read during subsequent Get Events. Saving the current minutes value effectively resets the inactivity standby timer and the inactivity suspend timer, at **241**. During normal use, there will be user activity and the Supervisor Routine SETs the "No Event" APM Return Code at **242** and returns to the APM calling code at **243**. The APM does not call any more routines in response to the "No Event" Return Code.

If the test at task **236** indicates that there has been no user activity, then the Supervisor Routine next tests if the inactivity standby timer and inactivity suspend timer have expired, at **245** and **247**, respectively. If the system **10** is in the standby state **152**, then the inactivity standby timer is not checked for expiration; rather, the test is skipped at task **244**.

The two timers are checked for expiration by subtracting the current minutes value from the saved minutes value to obtain a value corresponding to the number of minutes since there was user activity. This value is compared to the inactivity standby timeout value, at **245**, and the inactivity suspend timeout value, at **247**. The two timeout values are selectable by the user and may be set so that the system never enters the standby state **152**, never enters the suspend state **154**, or never enters either the standby state **152** or the suspend state **154** because of the expiration of one of the timers. Setting either timeout value to zero (0) indicates that the timer should never expire.

If the number of minutes since the last user activity is equal to or greater than the inactivity standby timeout value, then the Supervisor Routine causes the system **10** to enter the standby state **152**, at **246**. If inactivity standby timer has not expired, the Supervisor Routine next tests the inactivity suspend timer for expiration, at **247**. On the other hand, if the inactivity standby timer has expired, then the Supervisor Routine causes the system **10** to enter the standby state **152** by placing certain components into their respective low-power modes, as shown in FIG. **18**. In short, in the preferred embodiment, the Supervisor Routine blanks the video signal, spins down the hard disk within the hard drive **31**, slows down the system clock, enables APM CPU Idle calls so that CPU Idle calls from the APM driver halt the CPU **40**, and sets a flag indicating that the system **10** is in the Standby State **152**. After causing the system **10** to enter the standby state **152**, the Supervisor Routine tests the inactivity suspend timer for expiration, at **247**.

The Supervisor Routine tests if the inactivity suspend timer has expired, at **247**. If the number of minutes; since the last user activity is equal or greater than the inactivity suspend timeout value, then the Supervisor Routine SETs the "Suspend Request" APM Return Code, at **248**, and then returns to the APM, at **243**. As described above in the text accompanying task **226**, in response to the SET "Suspend Request" APM Return Code, the APM performs any necessary system tasks and then calls the Suspend Routine. The Suspend Routine is discussed more fully in the text accompanying FIG. **10** and, in short, causes the system **10** to leave the normal operating state **150** and enter the suspend state **154**. As discussed in the text accompanying task **226**, the Suspend Routine may return control to the Supervisor Routine with or without suspending the system **10**. On the other hand, if the inactivity suspend timer has not expired, then the Supervisor Routine SETs the "No Event" APM Return Code at **242** and returns to the APM calling code at **243**.

Although most often a "No Event" APM Return Code will be returned to the APM, various other events may be returned to the APM. However, only one APM Return Code may be specified for each APM Get Event. For example, after entering the standby state **152**, a "No Event" is returned to APM. After leaving the suspend state **154**, the "Normal Resume" APM Return Code is returned to the APM. The specific messages queued for APM will depend on the exact nature of the computer system. The Supervisor Routine also returns a "Normal Resume" APM Return Code or a "Suspend Request" APM Return Code.

Referring now to FIG. **9**B, the APM Working On Last Request: Routine is shown, starting at **961**. Responsive to the APM Working on Last Request being issued, the BIOS APM routines restart the failsafe timer and APM fail-suspend timer in the microcontroller U**2**, at **962**, restarts the 15-second suspend pending timer to prevent a critical suspend request from being issued while the OS APM is still waiting for the system to properly prepare for the suspend, at **963**, and returns, at **964**.

Referring now to FIG. **9**C, the APM Reject Last Request Routine is shown, starting at **965**. Responsive to the APM Reject Last Request being issued, the BIOS APM routines restart the failsafe timer and APM fail-suspend timer in the microcontroller U**2**, at **966**, SETs the Critical Suspend Flag thereby forcing an immediate suspend, at **967**, and returns, at **968**.

The Power-Up and Resume routines are best understood with a knowledge of the Suspend Routine. Therefore, it is believed that a description of the APM BIOS routines is best examined in the following order: a general overview of the Power-Up routine of the present invention (above in FIG. **8**), details of the Supervisor Routine (FIG. **9**), details of the Suspend Routine of the present invention (FIG. **10**), details of the Power-Up process of the present invention (FIG. **11**), details of the Resume Routine of the present invention (FIG. **12**), details of the Save CPU State Routine (FIG. **13**), details of the Restore CPU State Routine (FIG. **14**), and details of the Save 8259 State Routine (FIG. **15**).

It is believed that although any discussion of the computer system **10** of the present invention is somewhat circular because most of the routines interact with the others and the suspend/resume process is a continuing cycle, a discussion of the Suspend Routine (FIG. **10**) before the Boot Routine (FIG. **11**) or the Resume Routine (FIG. **12**) will be most helpful. Referring now to FIG. **10**, a flow chart of the Suspend Routine is shown. Recall that after either the normal boot routine **204–210** or the resume boot routine **214–220** are executed, the computer system **10** is in the normal operating state **150**. Moreover, as mentioned above in the text accompanying FIG. **8**, whether the computer system was either normally booted **204–210** or resume-booted **214–220**, after either routine finishes, the APM OS driver is aware of the APM BIOS routines, such as the Supervisor Routine, shown in FIG. **8**. As a result, the APM polls the Supervisor Routine approximately every one second.

Qualcomm Ex. 1008 - 71/84

The Suspend Routine is shown in FIG. **10** and commences at **250**. The Suspend Routine is called by the APM in response to the Supervisor Routine returning to the APM a "Suspend Request" APM Return Code. In addition, the Suspend Routine is called and partially executed when the system performs a Checkpoint, as more fully explained in the text accompanying FIGS. **17** and **18**. First, the flow of the Suspend Routine depends on whether the CPU **40** is an S part having an SMI, at **970**. If so, the CPU **40** causes the microcontroller U2 to generate an SMI back to the CPU **40**, at **972**. Responsive to the SMI, microcode in the CPU **40** saves the state of the CPU **40**, as is known to those skilled in the art, to the segment E**000**H data structure, at **974**.

On the other hand, if the CPU **40** is not an S part with art SMI, the Save CPU State Routine is called, as shown at **252**. The Save CPU State Routine will be detailed in the text accompanying FIG. **13**. Suffice it to say for now that no matter what mode the CPU **40** is in when the Suspend Routine is originally called, the remainder of the Suspend Routine will be executed with the CPU **40** in Real Mode and, therefore, may be executed without fear of generating any errors that might be caused by attempting to execute an instruction outside the allowed address-space or by attempting to execute a privileged instruction.

The Save CPU State Routine returns program control to the Suspend Routine, at **253**, in a unique manner. The "Return" from the Save CPU State Routine to the Suspend Routine involves resetting the CPU and is explained in more detail in the text accompanying tasks **630** and **632** of FIG. **13**, below. The important detail with respect to the Suspend Routine is that the CPU registers have been written to the segment E**000**H data structure and the CPU **40** is now in Real Mode.

After the Save CPU State Routine returns or after the CPU saves its own state responsive to an SMI, the Suspend Routine next ascertains whether the switch **21** was pressed, at **254**. The switch **21** closure is tested as described in the text accompanying FIGS. **6** and **7**. If the switch was not pressed, then the suspend underway is a software-suspend and the Software Suspend Flag is SET in CMOS NVRAM **96**. This ensures that a software suspend is not confused with a hardware suspend initiated by a switch closure. All software suspends are converted to hardware suspends by setting a bit in the microcontroller U2. The next switch closure after converting the software suspend to a hardware suspend aborts the suspend.

The next task is to set up a stack in segment E**000**H, indicated at **262**.

After the stack is set up the Suspend Routine, at **264**, examines the DMA controller **72**, the diskette adapter **84**, and the IDE disk controller **86** to see if any DMA transfers, floppy drive transfers, or hardfile transfers, respectively, are currently underway. If so, the suspend cannot be done because characteristics peculiar to these three types of transfers prevent a satisfactory suspend from being performed. For example, if a hardfile transfer from the hard drive **31** is underway, the data has already been read by the IDE controller, but has not yet been transferred to the system memory **53**. This data cannot be adequately accessed by the CPU and, therefore, this data would be lost if the system was suspended in the middle of a hard file read. Thus, if any of these three types of transfers are underway, the suspend is postponed until the next APM Get Event, when the DMA and diskette controllers are tested for activity once more.

Consequently, the tasks performed at **252**, **260**, and **262** must be reversed so control can be passed back to the APM. First, the BIOS is changed from read/write to read-only, as shown at **265**. That is accomplished by closing segment E**000**H, which still contains the shadowed data. The stack that was created in task **262** is popped and restored. Finally, the CPU state is restored by the Restore CPU State Routine, at **266**, before control is passed back to the APM at **267**. The Suspend Routine will be polled again by the APM in approximately another second during the next Get Event. By that time, the transfer(s) that prevented the suspend process will probably be complete, allowing the suspend to continue.

Returning now to task **264**, if no DMA transfers, floppy drive transfers, or hardfile transfers are currently underway, then a suspend may be performed. The Suspend Routine continues at **268**. Recall that the Failsafe Timer is continually counting down and will cause the system to turn itself off if it expires while the switch **21** is in the off/release state. Therefore, a first task is to reset the Failsafe Timer, described in the text accompanying FIGS. **6**A and **19**, as shown at **268**.

Next, the state of the 8042 coprocessor **104** is saved, at **270**. The 8042 coprocessor **104** registers are well known in the art. The registers are directly readable by the CPU **40** and their values are written directly into the data structure in E**000**H.

Next, the state of the 8259 interrupt controller **92** is saved, at **272**. The Suspend Routine calls the 8259 Save State Routine, which will be detailed in the text accompanying FIG. **15**. Suffice it to say for now that the 8259 Save State Routine ascertains the contents of the unknown registers of the two 8259 interrupt controllers **92**, even though some of the registers are write-only. The register values are written directly to the data structure in E**000**H.

After the state of the interrupt controller **92** is saved, the configuration of the interrupt controller **92** must be changed to a known state to allow proper functioning of the various interrupt-driven tasks executed by the Suspend Routine. Therefore, the BIOS Data Areas & Vector Tables are swapped, at **274**. The Suspend Routine copies the contents of the present-state BIOS Data Area and Vector Table in segment **0000**H to a location in segment E**000**H. Next, the contents of the known-state BIOS Data Area and Vector Table are copied from the data structure in segment E**000**H to the location in segment **0000**H. The known-state BIOS Data Area and Vector Table is copied to segment E**000**H in task **414** of the Boot-Up Routine, shown in FIG. **11**, which is discussed below. Finally the present-state BIOS Data Area and Vector Table are copied from segment **0000**H to the data structure in segment E**000**H. When the routine at **274** is finished, all the interrupts, such as interrupt **13**H (disk read/write) and interrupt **10**H (video access), will function as expected.

Next, the state of the timers **102** are saved, at **276**. The timers' registers are well known in the art. All of the registers are directly readable by the CPU **40** and their values are written directly into the data structure in E**000**H. The state of the IDE disk controller **86** is also saved at **276**. The IDE disk controller **86** registers are well known in the art. All of the registers are directly readable by the CPU **40** and their values are written directly into the data structure in E**000**H.

The next step is to prepare the system memory to be written to the Suspend File on the hard drive **31**. The system memory comprises system RAM **53** (which includes both main memory and any extended memory) and the video memory **58**. At this time, parts of the RAM **53** may be in the external cache **60**. The CPU cache was flushed at task **628**, which is discussed below in the text accompanying FIG. **13**. Next, the external cache is flushed, at **286**, and enabled to speed writes to the hard drive **31**.

Qualcomm Ex. 1008 - 72/84

The code executing on the system **10** may have put the IDE controller **86** into an unknown state. Consequently, the next step is to initialize the IDE controller **86** to a known state, at **292**. This is accomplished by writing values directly to the registers within the IDE controller **86**.

Next, an interrupt-driven parallel thread to read and save the state of any modems to the E**000**H data structure is started, at **976**. The routine captures the interrupt corresponding to the COMM port associated with the particular modem, transmits commands to the modem to cause it to sequentially transmit back the contents of its registers, receives the register contents transmissions from the modem, and saves the register values to the E**000**H data structure. This routine transmits a first command to the modem, and then responds in an interrupt-driven fashion, receiving the modem's response and transmitting the next command to the modem responsive to each COMM port interrupt, until all the modem's registers have been saved. If not executed as a parallel thread, this routine could add several seconds (3–5 seconds per modem depending on the particular modem and the current baud rate) to the time it takes to suspend the system. Being an interrupt-driven parallel thread, it adds little or no time to the suspend if it completes execution before the system state is written to the hard drive **31**.

After the interrupt driven parallel thread modem save routine is started, the Suspend File must be located on the fixed disk within the hard drive **31**, at **294**. The head, sector, and cylinder of the Suspend File is stored in CMOS memory **96**. Once the Suspend File is located, the file size and signature are read. In the preferred embodiment, the signature is an ASCII code of arbitrary length that indicates the presence of the Suspend File. Other alternative implementations of the signature are possible, such as using binary strings with very low probability of being found randomly on a hard file system.

Having read the file size and signature for the Suspend File, the next step is to ensure that the signature and file size are correct, at **296**. If either the signature is incorrect, indicating that another program may have modified the Suspend File, or the file size is not correct, indicating that the Suspend File size was modified, then the Suspend Routine calls the Fatal Suspend Error Routine, which starts at task **652** of FIG. **13**, at **298**. If the user presses the switch **17**, to exit the Fatal Suspend Error Routine, program control jumps from task **299** to task **506**.

On the other hand, if the signature is correct and the Suspend File is large enough, then the Suspend Routine may proceed writing the state of the computer system to memory.

Before writing the state of the computer system **10** to the hard drive **31**, the CPU **40** commands the microcontroller U2 to restart (reset) the failsafe timer and queries the microcontroller U2 to determine if the switch **21** was pressed again, at **297**. If the switch **21** was not pressed again then the suspend should continue. On the other hand, if the switch **21** was pressed again then the suspend is aborted. The failsafe timer is restarted and the switch **21** is tested for closure at several points in the Suspend Routine. Task **297** is merely illustrative; a circuit designer of ordinary skill in the applicable art will be able to determine the number of and permissible time between restarts of the failsafe timer. The Suspend Routine should reset the failsafe timer, before it expires causing the microcontroller U2 to cause the power supply **17** to be turned "off." Likewise, the switch **21** should be checked occasionally. If the switch **21** was pressed again, indicating that the user desires to abort the suspend, then the code should jump to an appropriate point in the Resume Routine to "un-suspend" and recover from the partial suspend.

Similarly, a Ctrl-Alt-Del aborts the suspend, at **350**. Pressing Ctrl-Alt-Delete (pressing the Control key, the Alt key, and the Delete key simultaneously) is a well known method of resetting typical computer systems based on the IBM BIOS and Intel 80X86 family of CPUs. The computer system **10** handles a Ctrl-Alt-Del with a BIOS Interrupt **1** handler, as is well known in the art. The computer system **10** has a slightly modified Interrupt **1** handler, at **350**, which clears the Suspend Flag in CMOS memory **96**, at **352**, and jumps to the Boot-Up Routine on reset, at **354**.

In the computer system **10** of the present invention, pressing Ctrl-Alt-Del while the Suspend Routine is executing causes the computer system to enter the off state **156**. This happens because after the switch **21** closure, pressing Ctrl-Alt-Del causes the Boot-Up Routine to be called, and the Boot-Up Routine initializes the microcontroller U2 to a state in which the failsafe timer has expired and the switch is still in the off/release state. Thus, pressing Ctrl-Alt-Del while in the Suspend Routine causes the computer system **10** to enter the off state **156**.

Referring now to task **300**, the Suspend File is again located on the hard drive **31**; the signature phrase is written to the first bytes of the Suspend File, at **300**. Next, the entire 64 kilobytes of data in segment E**000**H is written to the Suspend File, at **302**. This 64K copy of E**000**H is really just a place holder and will be rewritten to this same location at the end of the Suspend Routine.

Then, the state of the video controller **56** is saved, at **303**. The video controller **56** registers are well known in the art. All of the registers are directly readable by the CPU **40** and their values are written directly into the data structure in E**000**H.

Next, the system memory is written to the Suspend File. This is accomplished by a twin-buffer system that reads data from system memory, compresses and writes it to segment E**000**H, and finally writes the compressed data from segment E**000**H to the Suspend File. Two routines work in a time-multiplexed arrangement: one compresses the data and writes to segment E**000**H, the other writes to the Suspend File. The former is running in the foreground, the latter is an interrupt-driven routine that runs in the background. Obviously, since there is only one CPU **40**, only one routine can execute at a given time; however, because the latter routine is interrupt-driven, it can interrupt the execution of the former routine as needed to optimize the speed of transfer of the data to the Suspend File. Each of the two buffers is 8 kilobytes long, which is believed to optimize transfer time to the hard drive **31**.

This process starts at **304** with the reading, compression, and writing to segment E**000**H of enough data to fill the first of the 8K buffers. The data is compressed using the run length encoding method; however, any suitable compression method may be used. At this time, the Write from Buffer Routine, which is generally indicated at **307**, is started, at **306**. The Write from Buffer Routine **307** is an interrupt-driven routine that runs in the background and is comprised of tasks **308**–**310**. The Compression Routine, generally indicated at **311**, comprises tasks **312**–**318** and is the foreground routine. First, the Write from Buffer Routine **307** writes the buffer just filled by task **304** to the Suspend File, at **308**. While the Write from Buffer Routine **307** writes the contents of that buffer to the Suspend File, the Compression Routine **311** continues reading the next bytes from system memory, compressing them, and writing the compressed data to the other of the two 8K buffers, at **312**. Once the

Qualcomm Ex. 1008 - 73/84

Compression Routine **311** has filled the buffer with compressed data, the next step is to determine if the entire system memory has been compressed yet, at **314**.

The IDE controller **86** cannot write data to the hard drive **31** very quickly. As a consequence, the Compression Routine **311** will always finish filling the 8K buffer not being written to the hard drive **31** before the Write from Buffer Routine **307** finishes writing the buffer to the hard drive **31**. Therefore, the Compression Routine **311** must wait for the Write from Buffer Routine **307** to finish writing the buffer to the hard drive **31**. If the Compression Routine **311** has not finished compressing and writing all of system memory, then the Compression Routine **311** waits for the Write from Buffer Routine **307**, at **316**. The Compression Routine **311** and the Write from Buffer Routine **307** communicate via a set of flags. When the Write to Buffer Routine **307** finishes writing the current buffer to the Suspend File, the Routine **307** next switches the buffer flags, indicating to the Compression Routine **311** that it may start filling with compressed data the buffer that was just written to the Suspend File. Next, the failsafe timer C2 is reset and the switch **21** is checked for a closure event, at **309**, in the manner explained in the text accompanying task **297**.

The Write to Buffer Routine **307** then decides if the buffer just written to the Suspend File is the last buffer to be written, at **310**. If not, the Write from Buffer Routine writes to the Suspend File the buffer that was just filled by the Compression Routine **311**. In the mean time, the Compression Routine **311**, by examining the buffer flags, determined that a buffer is ready for more compressed system memory. That is, the Compression Routine waits at **316** until the Write from Buffer Routine finishes with the current buffer, at which time the compression loop continues at **312**. Note, the video memory **58** is compressed if linear frame buffering is supported, but is not compressed for VESA page access. Rather, VESA page access video memory is read through the video controller **56** using VESA calls and is written without compression using the twin-buffer system, explained in more detail above.

Once the Compression Routine **311** is finished compressing all the system memory, it waits at **318** for the Write from Buffer Routine **307** to finish writing the last buffer to the Suspend File. Once the Write from Buffer Routine **307** is finished, it branches from **310** to **318** and ceases to exist. At this time, no background routines are executing and the main program continues at **320**.

Next, at task **320**, the state of the DMA unit **71** (DMA controller **72** and Central Arbiter **82**), the 82077 diskette controller **84**, and the RS-232 UARTs **94** are saved. These devices have registers that are well known in the art. All of the registers within the diskette controller **84** and the UARTs **94** are directly readable by the CPU **40** and their values are written directly into the data structure in E**000**H. The DMA unit does not have readable registers. Rather, the write-only registers are normally set up before each DMA transfer. For this reason, the Suspend Routine stops a suspend if a DMA transfer is underway.

Next, at **978** the Suspend Routine tests whether the interrupt-driven modem state routine described in the text accompanying task **976** is finished. If not, it waits for this routine to finish.

It is believed to be desirable to be able to detect any tampering with the Suspend File once the computer system **10** enters the suspend state **150**. For example, it may be possible for someone to generate a modified Suspend File, move that Suspend File to the hard drive **31**, and attempt to have the computer system **10** restore into a different state than the one saved. To this end, a pseudo-random value is placed in the segment E**000**H data structure. As shown at **328**, after the interrupt-driven modem state save routine is finished, a 16-bit time-stamp is read from one of the high-speed timers **102**. This time-stamp is then written to the segment E**000**H data structure.

Next, a 16-bit checksum for the entire E**000**H segment is calculated by adding each 16-bit word in E**000**H together without ever considering the carry bit. This checksum is written to the segment E**000**H data segment, at **330**, and is written to the CMOS NVRAM **96**, at **332**. After which, all the working variables are written from the CPU **40** to the segment E**000**H data structure, at **334**, and the entire segment E**000**H is rewritten to the Suspend File, starting after the signature phrase of the Suspend File (directly after the signature), at **336**. Next, the Suspend Flag is SET in the CMOS NVRAM **96**, at **338**, informing the system **10** that the state of the computer system was saved to the Suspend File.

Next, the Suspend Routine determines whether a Checkpoint is being taken, at **980**. If so, then the system should not be powered down; rather, the system must be resumed to the extent necessary to recover from the partial suspend that was just performed. Therefore, if a Checkpoint is being taken, at **982** the Suspend Routine jumps to task **484** of the Resume Routine, which then performs a partial resume.

If a Checkpoint is not being taken, then the CPU **40** turns "off" the power supply by commanding the microcontroller U2 to pull the ON signal to a logical ZERO, thereby causing the primary/regulation unit **172** of the power supply **17** to stop providing regulated voltages along the ±5 and ±12 lines. The voltages take several seconds to ramp down to approximately zero, giving the CPU **40** time to execute numerous commands. Therefore, the CPU **40** executes an endless loop (a "spin"), at **342**, as it waits for the system power voltages generated by the power supply **17** to decline until the CPU **40** stops functioning.

Referring now to FIG. **11**, the details of the Boot-Up Routine are shown. The boot process was generally outlined in the text accompanying FIG. **8**. The Boot-Up Routine starts at **380** when the CPU **40** jumps to and executes the code pointed to by the Reset Vector. This occurs each time the CPU **40** is powered up and whenever the CPU **40** is reset by jumping to the code pointed to by the reset vector. Such reset procedures are well known in the art.

The first task is to test the CPU **40** and initialize the memory controller **46**, at **382**. The CPU is tested by the POST routine. Part of the CPU test is to determine whether the CPU **40** is an "S" part having an SMI. If so, a flag is SET indicating this fact. The memory controller **46** is initialized by the POST routine.

Next, the Boot-Up Routine tests whether the microcontroller U2 is functioning, at **986**. To do this, the CPU sequentially reads the status port of the power management circuitry **106** and waits for a transition from High to LOW and back from LOW to HIGH at that port. Such a transition indicates that the heartbeat of the microcontroller U2 is functioning; therefore, the CPU **40** can continue the booting process under the assumption that the microcontroller U2 is functioning as expected.

If the CPU does not detect a transition at the status port within a predetermined period of time, e.g., one or two seconds, then the microcontroller U2 does not have a heartbeat, and the CPU **40** commands the first PAL U1 to reset the microcontroller U2, at **988**, as explained above. Then the CPU **40** again waits for a transition from HIGH to LOW at the status port, at **990**. If the CPU again does not detect a transition at the status port within one or two

Qualcomm Ex. 1008 - 74/84

seconds, then the microcontroller U2 does not have a heartbeat, and the CPU **40** disables the power management features described herein, at **992**, under the assumption that the microcontroller U2 is in such a state that it cannot be reset.

On the other hand, if the microcontroller U2 is functioning, then the CPU **40** refreshes the minutes to wake alarm value in the microcontroller U2, at **994**. The time-base of the RTC **98** is much more accurate than the time base of the microcontroller U2. Therefore, to overcome this limitation without adding a much more accurate and, therefore, expensive time base to the microcontroller U2, the BIOS synchronizes the less accurate time base to the more accurate time base and updates the minutes to wake alarm value within the microcontroller U2 with a more accurate value derived from the RTC **98** each time the system boots. To accomplish this, the CPU **40** reads the absolute alarm date and time from the CMOS memory **96**, calculates the minutes to wake alarm value, and writes it to the microcontroller U2.

Thereafter, and if the microcontroller U2 is not functioning causing the power management features to be disabled, the Boot Routine determines if the system was booted due to the application of power to the power supply **17**, at **996**. Preferably, the power supply **17** always has AC power applied to its primary/regulation unit **172** and the regulation of power at the ±5 and ±12 lines is controlled by the ON# input. This way the power supply **17** can constantly provide the AUX5 needed to power the power management circuitry **106** and be controlled by the power management circuitry **106** without having it switch the AC power itself.

However, as is known to those skilled in the art, some users prefer to power their computer systems using a switched power strip (not shown), turning off and on the AC power to the entire system with a single switch. This poses problems for the power management circuit **106** because the microcontroller U2 and the other devices are configured to be constantly powered by the AUX5 power line. Therefore, the system must have a method of determining that it was powered by the application of AC power and behaving accordingly.

However, the AUX5 line is also subject to blackouts and brownouts, as explained above. After a blackout or brownout, the reset subcircuit **920** resets the microcontroller U2 to prevent it from hanging due to the out of tolerance voltages. Therefore, the system must be able to further determine whether the microcontroller was awakened after a brownout or after the application of AC power.

Consequently, at **996**, the CPU queries the microcontroller U2 about the event that caused the power supply **17** to be turned on. The microcontroller can return any one of four responses: (1) it was reset and, therefore, caused the power supply **17** to begin providing regulated power at the ±5 and ±12 lines, (2) the minutes to wake alarm expired, (3) a ring occurred at either the RS-232 ring input or the ring input from the optoisolator OPTO1, and/or (4) the switch **21** was pressed. The reason for the system being powered on can be read directly from the microcontroller U2 by application programs, such as a scheduler, which would execute certain programs responsive to the particular reason the system was powered up. In the alternative, the reason for powering up the system can be made available via one or more BIOS calls.

Other than being reset by the CPU **40**, the microcontroller U2 is only reset by the reset subcircuit **920**, which resets the microcontroller whenever either the AUX5 line is applied or it glitches. Therefore, if the microcontroller U2 was reset, or if the microcontroller returned an invalid wakeup code, which is tested at **997**, the CPU **40** must then determine whether the power supply should continue the regulation of power at the ±5 and ±12 lines or not, at **998**. To this end, a flag in CMOS NVRAM called DEFAULTON is used. If this flag is SET, then the power supply **17** should continue providing regulated power after the microcontroller U2 is reset. On the other hand, if DEFAULTON is not SET, then the power supply **17** should cease providing regulated power after the microcontroller U2 is reset and, therefore, the CPU **40** commands the microcontroller U2 to cause the power supply **17** to cease providing regulated power at the ±5 and ±12 lines, at **1000**. Thereafter, the voltages take several seconds to ramp down to approximately zero, giving the CPU **40** time to execute numerous commands. Therefore, the CPU **40** executes an endless loop (a "spin"), at **1002**, as it waits for the system power voltages generated by the power supply **17** to decline until the CPU **40** stops functioning, at **1004**. As mentioned above, the microcontroller U2 is preferably constantly powered by the AUX5 line and continues executing its programmed routines.

Thereafter, if the microcontroller returned a valid wakeup code, at **997**, or if the microcontroller U2 was reset, but the system, is to remain powered, at **998**, the CPU **40** commands the microcontroller U2, at **1004**, to generate an SMI back to the CPU **40** before it causes the power supply **17** to cease providing regulated power at the ±5 and ±12 lines in the event the microcontroller U2 deems that the power should be turned off. Also, at **1004**, the CPU SETs the DEFAULT ON bit in the CMOS NVRAM so that if AC power is lost, the system will turn itself back on after AC power is reapplied.

Then, the Boot Routine performs the first Plug & Plan resource allocation pass, at **1006**, as known to those skilled in the art.

Next, the shadow memory is tested and the BIOS is copied from ROM **88** to the shadow memory portion of RAM **53**. The flow of the executed code depends on whether the Suspend Flag is SET in CMOS NVRAM **96**. If the Suspend Flag is SET, then the computer system **10** is in the suspend state **150**, and the computer system **10** should be restored to the state it was in when it was suspended. The system RAM **53** in segments E**000**H and F**000**H are given an abbreviated test. To reduce the amount of time the computer takes to resume, the memory is merely checked for proper size and zeroed (**000**H is written to each location).

On the other hand, if the Suspend Flag is CLEARed in CMOS NVRAM **96**, then the system RAM **53** in segments E**000**H and F**000**H are given the standard, in-depth memory test comprising: (1) a sticky-bit test, (2) a double-bit memory test, and (3) a crossed address line test. These tests are well-known in the art.

After segments E**000**H and F**000**H are tested, the BIOS may be shadowed which involves copying the contents of the ROM BIOS **88** to the system RAM **53** and configuring the memory controller to execute the BIOS from RAM. Shadowing the BIOS is done to increase the speed of the system; system performance is enhanced because the BIOS is running from the faster system RAM **53** (a typical access time is 80 nanoseconds) rather than the slower ROM **88** (typical access time 250 nanoseconds). Shadowing the BIOS comprises loading a BIOS copier to an address in lower memory, copying the BIOS from the ROM **88** to the segments E**000**H and F**000**H of the system RAM **53**, and enabling the shadow RAM.

Next the video controller **56** is tested and initialized and the video memory **58** is tested, both at **384**. These tests and initializations are well known in the art.

Qualcomm Ex. 1008 - 75/84

Then, the Boot Routine performs the second Plug & Plan resource allocation pass, at **1008**, as known to those skilled in the art.

The flow of the executed code depends on whether the Suspend Flag is SET in CMOS NVRAM **96**, at **386**. If the Suspend Flag is SET, then the remaining system RAM **53** is merely checked for size and then zeroed, like task **383**. If, however, the Suspend Flag is CLEARed in CMOS NVRAM **96**, then the remaining system RAM **53** is tested at task **398** using the three-step, in-depth memory test described in the text accompanying task **383**.

After the memory is tested, the auxiliary devices—including the 8259, the UARTs, the 8042, and any others—are tested and initialized, at **400**. At task **408**, the fixed disk controller is initialized.

The flow of the executed code depends on whether the Suspend Flag is SET in CMOS NVRAM **96**, at **409**. If the Suspend Flag is SET, indicating that the state of the system was successfully saved when power was last removed, then the Boot-Up Routine skips the test of the hard drive controller **86** and hard drive **31**. On the other hand, if the Suspend Flag is CLEARed in CMOS NVRAM **96**, indicating that the state of the system was not saved when power was last removed, then the Boot-Up Routine performs a complete test of the fixed disk controller **86** and hard drive **31**, at task **410**, as is well known in the art.

Next, the floppy drive controller **84** is tested and initialized at **412**.

At this time, all the devices are initialized and the vectors point to known locations, so all interrupt routines will work as expected. Therefore, the Boot-Up Routine snapshots the BIOS Data Area & Vector Table, at **414**, which writes a copy of the BIOS Data Area and the Vector Table to the data structure in segment **E000**H. This copy of the BIOS Data Area and the Vector Table is used by the Suspend Routine at task **274** to place the computer system **10** into a known state, with all interrupts working as expected.

Next, any BIOS extensions are "scanned in" and initialized at **416** as is well known in the art. BIOS extensions are blocks of BIOS code added to the system by peripheral adapters, such as network adapters. BIOS extensions are typically located in segments **C000**H and **D000**H on the ISA bus **76** and have an associated "signature" to identify the BIOS extension as such. If a BIOS extension is detected, the length is checked and a checksum is calculated and checked. If the signature, length, and checksum all indicate that a valid BIOS extension exists, program control passes to the instruction located three bytes past the signature and the BIOS extension can perform any needed tasks such as the initialization of the peripheral adapter. Once the extension finishes execution, control passes back to the Boot-Up Routine, which searches for more BIOS extensions. Any more BIOS extensions are handled like the BIOS extension above. If no more BIOS extensions are detected, the Boot-Up Routine then moves to task **417**.

At **417** the Boot-Up Routine searches for a partition on the hard drive **31** that appears to be partition specifically allocated for the Suspend File. If a partition with a PS/1 identifier "FE" or a hibernation partition with the identifier "**84**" in the partition table is found and that partition is large enough to accommodate a Suspend File for this particular system, then that partition is used for the Suspend File. Consequently, the Suspend File Signature is written to the first bytes of the area, and the starting head, sector, and cylinder of the area are written to CMOS NVRAM **96**.

The flow of the executed code then branches, depending on whether the Suspend Flag is SET in CMOS NVRAM **96**, at **418**. If the Suspend Flag is cleared, then the Boot-Up Routine passes control to the PBOOT routine at **420**. PBOOT is well known in the art and is responsible for loading the operating system (OS) and command interpreter from either a floppy disk or the hard drive **31**. If a partition for the Suspend File was not found at task **417**, then the OS executes an OS-specific driver described in the text accompanying FIG. **16** that checks whether a partition was found, and if not allocates a file of contiguous sectors (defragmenting an area if necessary) in the FAT, writes the signature to the first bytes of the Suspend File, and writes the starting head, sector, and cylinder of the Suspend File to the CMOS NVRAM **96**.

Regardless of when the Suspend File is allocated, the file should be contiguous sectors to allow a rapid write to disk and a rapid read from disk during suspends and resumes, respectively.

The OS next configures the system based on the instructions found in the CONFIG.SYS file. Lastly, the OS executes the AUTOEXEC.BAT file, which eventually passes execution control back to the operating system. If the Suspend Flag is cleared in CMOS NVRAM **96**, indicating that the state of the system was not saved when power was last removed, then RESUME.EXE, which is explained more fully in the text accompanying task **421**, is ignored.

Referring back to task **418**, if the Suspend Flag is set in CMOS NVRAM **96**, indicating that the state of the system was saved when power was last removed, then the flow of the executed code then branches, depending on whether the Reinitialize Adapters Flag is SET in CMOS NVRAM **96**, at **419**. If the Reinitialize Adapters Flag is set, then the Boot-Up Routine passes control to the PBOOT routine at **421**. Like the usual PBOOT Routine, PBOOT of the present invention loads the OS, which configures the system in accordance with the commands found in the CONFIG.SYS and AUTOEXEC.BAT files, which, inter alia, load drivers and configure the system as is well known in the art.

The commands in CONFIG.SYS and AUTOEXEC.BAT may initialize adapter cards in the system. This application presumes three types of adapter cards exist: Type I adapters do not need initialization; Type II adapters require initializing, but are placed into a known working state by the BIOS extension or the driver loaded as per the CONFIG.SYS or AUTOEXEC.BAT files; and Type III adapters are modified by code executing on the system. Systems comprising Type I and Type II adapters may be suspended and restored; however, systems comprising Type III adapters, which include many networking adapters, may not be restored, unless the cards have an associated APM aware device driver that reinitializes the adapter after certain conditions occur, such as system power being removed. Systems may suspend Type III cards that have an APM aware device driver.

The file RESUME.EXE is added to the AUTOEXEC.BAT file in the preferred embodiment and is responsible for transferring program control from the OS to the Resume Routine. The OS in task **420** ignores the presence of RESUME.EXE; however, the OS of task **421** executes RESUME.EXE, which passes control to the Resume Routine after the Type II adapters are finished being initialized by the device drivers loaded by the OS from CONFIG.SYS AND AUTOEXEC.BAT.

Referring back to task **419**, if the Reinitialize Adapters Flag is cleared in CMOS **96**, the OS passes execution control to the Resume Routine via RESUME.EXE. The Resume Routine restores the system state from the Suspend File on the hard drive and is described in detail in the text accompanying FIG. **12**.

Qualcomm Ex. 1008 - 76/84

Referring now to FIG. **12**, the details of the Resume Routine, tasks **450** through **530**, are shown. First, the CPU is tested at **451**. If the CPU **40** has an SMI, then a CPU resume SMI is generated, which places the CPU into SMM mode and jumps to the code at task **454**. If the CPU does not have an SMI, then a resume shutdown occurs, in which a reset is caused and the reset handler jumps to the code at task **454**. During the configuration process, the BIOS Data Area & Vector Table is probably modified to an unknown state; therefore, the basic BIOS routines may or may not function as expected. Consequently, the Resume Routine enables segment **E000H** as read/write, at **454**, and calls the Swap BIOS Data Area & Vector Table Routine at **456**. This routine swaps the known, good BIOS Data Area & Vector Table, which was copied to segment **E000H** in task **414**, with the modified BIOS Data Area & Vector Table, which is currently active in segment **0000H**. When the routine is finished, the known BIOS Data Area & Vector Table is active in segment **E000H**, the modified BIOS Data Area & Vector Table is in segment **E000H**, and the BIOS routines will function as expected.

Next, the Resume Routine disables all interrupts except those supporting the keyboard and the hard drive, at **458**. Then, the Resume Routine locates the Suspend File on the hard drive **31**, at **460**, and reads the file size and the signature, which, as explained above, is the multi-byte identifier for the Suspend File. The flow of the executed code then branches, at **462**, depending on whether the Suspend File has the correct size and signature. If the Suspend File does not have the correct size and signature, then the Resume Routine CLEARs the Suspend Flag in CMOS memory **96**, at **464**, and program control is passed to the code in the location pointed to by the Reset Vector, at **466**, thereby causing the system to boot as though the system was never suspended. On the other hand, if the Suspend File has the correct size and signature, then the Resume Routine continues with the system resume by reading the 64K block in the Suspend File located after the signature (the portion of the Suspend File that corresponds to the segment **E000H** information) to segment **1000H**, at **468**.

Next, the checksum of the block in **1000H** is calculated, at **470**, the previously stored checksum is read from CMOS non-volatile memory **96**, at **472**, and the flow of the executed code then branches, at **474**, depending on whether the checksum calculated in task **470** is the same as the checksum calculated in task **330**. If the checksum calculated in task **470** is not the same as the checksum calculated in task **330**, then the Suspend File is somehow flawed (for example, it may have been tampered with) and control passes to task **464**, which CLEARs the Suspend Flag and resets the system, as explained in the text accompanying tasks **464** and **466**. If the checksum calculated in task **470** is the same as the checksum calculated in task **330**, then the Suspend File is presumed to be the same one written by the Suspend Routine, and the data in segment **1000H** is copied to segment **E000H**, at **476**.

Now, the Resume Routine writes to the screen, at **478**, a special signal screen informing the user that the system is being restored and that the user should press Ctrl-Alt-Del to abort the resume. As with the Suspend Routine, pressing Ctrl-Alt-Del clears the Suspend Flag, at **526**, and causes the system to reboot, at **528**.Thus, the system reboots normally when Ctrl-Alt-Del is pressed and the Resume Routine is executing.

Then, the **82077** diskette controller **84** and the DMA unit **71** are restored by writing the values from the segment **E000H** data structure to their respective registers, at **480** and **482**, respectively.

Next, an interrupt-driven parallel thread to restore the state of any modems from the **E000H** data structure is started, at **1020**. As with the routine at task **976**, the modem restore routine captures the interrupt corresponding to the COMM port associated with the particular modem, reads values from the **E000H** data structure, transmits commands and values to the modem to cause it restore the registers therein. This routine transmits a first command to the modem, and then responds in an interrupt-driven fashion, receiving the modem's response and transmitting the next value to the modem responsive to each COMM port interrupt, until all the modem's registers have been restored. Like the modem save routine, if not executed as a parallel thread, this routine could add several seconds to the time it takes to resume the system. Being an interrupt-driven parallel thread, it adds little or no time to the resume, if it fully executes before the system state is read from the hard drive **31**.

After the interrupt driven parallel thread modem restore routine is started, at tasks **486** through **500**, the system memory is restored from the Suspend File using a twin buffer routine similar to the routine explained in the text accompanying tasks **304** through **318** in the Suspend Routine. This twin-buffer system reads compressed data from the Suspend File, writes it into segment **E000H**, decompresses it, and writes it to the system memory. Two routines work in a time-multiplexed arrangement: one reads data from the Suspend File and writes it into segment **E000H**, and the other decompresses the data and writes the decompressed data to the system memory. The latter is running in the foreground, the former is an interrupt-driven routine that runs in the background. Obviously, since there is only one CPU **40**, only one routine can execute at a given time; however, because the former routine is interrupt-driven, it can interrupt the execution of the latter routine as needed to optimize the speed of transfer of the data from the Suspend File. Each of the two buffers is 8 kilobytes long, which is believed to optimize transfer time.

This process starts at **486** with the reading from the Suspend File and writing to segment **E000H** of enough data to fill the first of the 8K buffers. At this time, the Read from Buffer Routine, which is generally indicated at **489**, is started, at **306**. The Read from Buffer Routine **489** is an interrupt-driven routine that runs in the background and is comprised of tasks **490–492**. The Decompression Routine, generally indicated at **493**, comprises tasks **494–498** and is the foreground routine. First, the Read from Buffer Routine **489** starts reading the next 8K of the Suspend File and writing it to the other buffer, now the current buffer, at **490**. While the Read from Buffer Routine **489** reads the next 8K from the Suspend File and writes it to the current buffer, the Decompression Routine **493** reads the buffer filled by task **486** decompresses the compressed data, and writes the decompressed data to the system memory, at **494**. Once the Decompression Routine **493** has decompressed all the data in that buffer, the next step is to determine if the entire system memory has been decompressed yet, at **496**.

The IDE controller **86** cannot read data from the hard drive **31** very quickly. As a consequence, the Decompression Routine **493** will always finish decompressing the 8K buffer not being written to the hard drive **31** before the Read from Buffer Routine **489** finishes reading data into the current buffer from the hard drive **31**. Therefore, the Decompression Routine **493** must wait for the Read from Buffer Routine **489** to finish reading data from the hard drive **31**. If the Decompression Routine **493** has not finished compressing and writing all of system memory, then the Decompression Routine **493** waits for the Read from Buffer Routine **489**, at

498. The Decompression Routine 493 and the Read from Buffer Routine 489 communicate via a set of flags. When the Read from Buffer Routine 489 finishes reading data from the Suspend File into the current buffer, the Routine 489 next switches the buffer flags, at 490, indicating to the Decompression Routine 493 that it may start decompressing the data in the buffer that was just read from the Suspend File. The Read from Buffer Routine 489 then decides if an 8K block remains to be read from the Suspend File, at 492. If not, the Read from Buffer Routine reads the remaining data from the Suspend File and writes it to the current buffer, at 502. The Read from Buffer Routine then ceases running in the background, in effect waiting at 500 for the Decompression Routine to finish decompressing the last memory.

In the mean time, the Decompression Routine 493, by examining the buffer flags, determines that a buffer is ready for decompression to system memory. That is, the Decompression Routine waits at 498 until the Read from Buffer Routine finishes with the current buffer, at which time the decompression loop continues at 494.

Once the Decompression Routine 493 is finished decompressing all the system memory, the only background routine executing is the interrupt-driven modem restore routine explained in the text accompanying task 1020 and the main program continues at 504.

Next, the video controller 56 and the IDE controller 86 are restored, at 504 and 506 by writing the values from the E000H data structure to the registers within each of the two devices. Task 504 is also the point to which the Suspend Routine jumps (see task 1024) if a Checkpoint is being taken.

Then, at 1022, the Resume Routine tests whether the interrupt-driven modem restore routine described in the text accompanying task 1020 is finished. If not, it waits for this routine to finish.

As shown at 508, after the interrupt-driven modem state restore routine is finished, the CPU cache 41 and the system cache 60 are enabled by writing appropriate values to the CPU 40 and the cache controller 62, respectively. Next, the Resume Routine restores the state of the timer controller 102, the 8042 keyboard interface microprocessor 104, and the 8259 interrupt controller 92 by writing values from the segment E000H data structure to the registers within the respective devices, at 510 through 514.

Next, the UARTs 94 are restored by writing the values from the segment E000H data structure to their respective registers, at 484.

Next, the Resume Routine calls the Swap BIOS Data Area & Vector Table Routine, at 516. Before the routine is called, the known BIOS Data Area & Vector Table is active in segment 0000H and the BIOS Data Area & Vector Table read from the Suspend File is inactive in the segment E000H data structure. After the swap, the known BIOS Data Area & Vector Table is inactive in segment E000H and the BIOS Data Area & Vector Table that was saved by the Suspend Routine is active in segment 0000H.

Lastly, the Resume Routine jumps to the Restore CPU Routine, at 518, which restores the CPU 40 to the state before it was suspended. The Restore CPU Routine will be explained more fully in the text accompanying FIG. 14. The Restore CPU Routine eventually passes execution control back to the APM.

Finally, the CPU 40 executes a RETURN instruction, causing the system to return to the APM. The system now continues executing code as though the system was never suspended. For all practical purposes, the system is unaffected by the suspend/resume procedure.

Referring now to FIG. 13, a flow chart of the Save CPU State Routine is shown. The Suspend Routine jumps to the Save CPU State Routine at 600. Note that the APM enabled segments E000H and F000H, from which these routines execute, as read/write. In addition, EFLAGS and the eight general purpose registers were saved by the APM, as indicated at 602. The Save CPU State Routine first waits for any DMA to finish and synchronizes to the mouse 13 data packet:, at 604, to ensure that this routine executes between mouse packet transmissions. The following steps allow DMA to finish and synchronize to the mouse packet: (1) enable interrupts, (2) wait 7 milliseconds for any DMA to finish, (3) disable interrupts, (4) wait 5 milliseconds for a mouse packet boundary, (5) enable interrupts, (6) wait 5 more milliseconds for the mouse packet to arrive, and (7) disable interrupts. After these steps, the code may safely execute between mouse packets.

Next, the state of Address Line 20 (I/O port 92H) is PUSHed onto the Stack, at 606.

The flow of the executed code then branches, at 1030, depending on whether the CPU 40 is an "S" part having an SMI. If so, the CPU 40 commands the microcontroller U2 to generate an SMI back to the CPU 40, at 1032. In response to the SMI, microcode within the CPU 40 saves the state of the CPU 40 to E000:FE00H in the E000H data structure, at 1034. Thereafter, the CPU 40 saves the state of the floating point coprocessor, at 1036, and calls the Suspend Routine (FIG. 10), at 1038. As explained elsewhere, the Suspend Routine then returns, at 1040, and restores the state of the floating point coprocessor, also at 1040. Thereafter, at 1042, a RSM (resume) instruction restores the CPU state and then branches to 732.

On the other hand, if the CPU 40 does not have an SMI, the CPU state must be saved using the remainder of the FIG. 13 code and the state of the arithmetic coprocessor 44 is PUSHed onto the Stack, at 608. Then, at 610, a flag is SET of CLEARed to indicate whether the CPU is executing in 32-bit or 16-bit mode, respectively.

The flow of the executed code then branches, depending on whether the CPU 40 is executing in Protected Mode or not, at 612. If the CPU 40 is not executing in Protected Mode, then it must be executing in Real Mode and the registers may be saved in a very straightforward manner. First, the values in the machine status word and CR3 are written to the segment E000H data structure, at 614. Also at 614, zero is written into the segment E000H data structure in the areas corresponding to TR and LDTR, because TR and LDTR are zero in Real Mode.

The code then merges with a common code path at 616, where the values stored in GDTR and LDTR are written to the segment E000H data structure. Next the flow of the executed code then branches, depending on whether the CPU 40 was executing in Virtual 8086 Mode or not, at 618. If the CPU 40 is not executing in Virtual 8086 Mode, then the code continues down the common path to task 620, where the debug registers DR7, DR6, DR3, DR2, DR1, and DR0 are PUSHed onto the Stack. These registers are being used by debuggers and other routines. Then DS, ES, FS, and GS are PUSHed onto the Stack, at 622. Next, the values in CS, SS, and ESP are written to the segment E000H data structure.

At this point, all the values to be written to the segment E000H data structure have been written, so the Shadow RAM segments E000H and F000H can be changed back to read-only, at 626. Next, the CPU cache 41 is flushed using the Write-Back and Invalidate Cache command, at 628.

Lastly, a unique Shutdown Flag is SET in the CMOS non-volatile memory 96, at 630. Finally, the Save CPU State

Qualcomm Ex. 1008 - 78/84

Routine "Returns," in effect, to the Suspend Routine, at **632**. The "Return" is actually a RESET followed by a branch in the code. The CPU **40** resets by JUMPing to the code pointed to by the Reset Vector. Resetting the CPU **40** forces the CPU into Real Mode, where all the devices and memory locations may be accesses without fear of generating a protection fault. After this point, the state of the CPU has been saved and the Suspend Routine must save the state of the rest of the system.

Within the code pointed to by the Reset Vector, program control branches, depending on whether the Shutdown Flag is SET in the CMOS **96**. If the Shutdown Flag is CLEARed, then the system boots as it normally would. On the other hand, if the Shutdown Flag is SET, then the code branches to the rest of the Suspend Routine; that is, execution control jumps to task **253** in FIG. **10** within the Suspend Routine, which finishes suspending the system **10**. Thus, the Save CPU State Routine effectively "Returns" to the Suspend Routine at **632**.

Referring back to task **612**, if the CPU is in Protected Mode, then the code branches, at task **634**, depending on whether the CPU is in Virtual 8086 Mode, or not. If the CPU is not in Virtual 8086 mode, then the code again branches, at task **636**, depending on whether the current privilege level is zero. If the current privilege is anything but zero, then a routine without proper privilege is executing the Save CPU State Routine, and the Fatal Suspend Error Routine (starting at task **652**) is called. The Fatal Suspend Error Routine will be discussed below. If program control returns from the Fatal Suspend Error Routine, then the CPU must be returned to its condition before the Save CPU State Routine was called, so program execution branches to task **794**, in FIG. **14**, which performs a partial restore of the CPU. Only a partial restore is necessary because very little in the CPU has been modified.

Referring back to task **636**, if the calling code has the proper privilege level, then the save continues, at **642**, as the values in CR**0**, CR**3**, TR, and LDTR are saved to the segment E**000**H data structure. Then this code path merges with the common code path at **616**, where the values in GDTR and the IDTR are saved to the E**000**H data structure, as explained above. From here, the code follows the path from **618** to **632** that was explained above, resulting in a "Return" (RESET plus a branch) to the remaining Suspend Routine code.

Referring back to task **634**, if the CPU **40** is in Virtual 8086 mode, then execution continues at **644**, where the value of the machine status word (the lower 16 bits of CR**0**) is saved to the E**000**H data structure and a Flag in the segment E**000**H data structure is SET indicating that the CPU is in Virtual 8086 Mode. This code then merges with the common code at **616** via the transfer **646** and **648**. At task **618**, if the CPU was in the Virtual 8086 Mode, then control branches to **650**, where the values in DS, ES, FS, and GS are saved in the segment E**000**H data structure. This code remerges with the common code at **624**. From here, the code follows the path from **624** to **632** that was explained above, resulting in a "Return" (RESET plus a branch) to the remaining Suspend Routine code.

The Fatal Suspend Error Routine is found at tasks **652** through **664** and is called at **638** if code with an improper privilege level attempts to save the state of the CPU. First, the Failsafe Timer is RESET, at **654**. Then the speaker beeps a number of times at an audible frequency, e.g., three times at 886 Hz for 0.25 seconds, with ⅙th of a second between beeps, at task **656**. The three beeps alerts the user that the attempted suspend did not take place. After beeping, the Failsafe Timer is RESET again at **658** to give the user a consistent 15 to 18 seconds before the Failsafe Timer expires, shutting off the power supply **17**.

Next, the Fatal Suspend Error Routine repeatedly checks to see if the switch **21** was pressed by user, at tasks **660** and **662**, indicating that the user wants to abort the suspend. The switch is checked for closure by the CPU **40** querying the microcontroller U**2** whether a closure event occurred. If the user presses the button **21**, then the execution control returns to task **640**, above. If the user does not press the button **21** within 15 to 18 seconds, then the Failsafe Timer will expire and the power supply **17** will be turned "off" by the microcontroller and, obviously, all execution of the code by the CPU **40** will cease as the system voltages fall out of tolerance.

Referring now to FIG. **14**, a flow chart of the Restore CPU Routine is shown starting at **700**. This routine is called by the Resume Routine after the rest of the hardware and memory have been restored to their state before the suspend. First, if segment E**000**H is not read/write yet, it should be made read/write, at **702**.

Next the flow of the executed code then branches, depending on whether the CPU **40** was executing in Virtual 8086 Mode when it was suspended, at **704**. If the CPU **40** was executing in Virtual 8086 Mode when the system **10** was suspended, then the code from tasks **706** through **728**, which are unique to the Virtual 8086 CPU restore. Then the code merges with a common path from tasks **730** through **748**.

If the CPU was in Virtual 8086 mode when the state was saved, then CR**3**, LDTR, and TR could not be accessed by the Save CPU State Routine to save those values to the E**000**H data structure. Therefore, CR**3**, LDTR, and TR must be estimated, respectively, at **706**, **708**, and **710**. In general, they are estimated by searching through the system RAM **53** for the structures to which CR**3**, LDTR, and TR point. For example, finding the LDT entry in the GDT allows the LDTR to be determined.

CR**3** is estimated at task **706**. CR**3** holds the Page Directory Base Register (PDBR), which holds the page frame address of the page directory, the Page-Level Cache Disable (PCD) bit, and the Page-Level Write Through (PWT) bit. Estimation of the PDBR is done knowing that the page directory must start at a 4K boundary within system RAM **53**, knowing the values for the IDTR and the GDTR, which were saved in the segment E**000**H data structure by the Save CPU State Routine, and assuming that the BIOS code is executing from segment F**000**H. The assumption is reasonable because the BIOS code is already shadowed into Shadow RAM for speed. If the operating system copied the BIOS code to a different area, then the estimation of CR**3** would fail.

With the above knowledge and assumption, every 4K page of physical memory is tested for the presence of a page translation table corresponding to the BIOS code segments. That is, an offset of **03C0**H into the page would contain the values **000F0**XXX, **000F1**XXX, **000F2**XXX, . . . **000FE**XXX. Once that page is located, the system RAM **53** is searched for a page directory whose first entry corresponds to the physical address of the page table that was located above. The physical address of the page directory is a good "guess" of the value of the PDBR.

The hypothetical PDBR is then verified by ensuring that the PDBR translates the addresses for the GDTR and the IDTR correctly. That is, the PDBR is used to translate the linear address of the GDTR and the first entry of the GDT is verified to be a null (the first eight bytes of the GDT are always **00**H in any CPU mode). Then the physical address

Qualcomm Ex. 1008 - 79/84

that is returned is verified to be within the bounds of physical memory. To accomplish the linear to physical translation, a subroutine that mimics the CPU's translation method is used; the translated address is returned in ESI and the carry flag CF is cleared if the physical page is present in physical memory, and CF is SET if the physical page is not present in memory. Using this translation routine, the first byte of the GDT is read from memory **53**. If the first entry of the GDT is a null, then the hypothetical PDBR passed its first test and is, therefore, tested once again. The PDBR is then used to translate the IDTR to find the IDT using the translation routine. Then the physical address that is returned is verified to be within the bounds of physical memory. If the first location of the IDT is present in physical memory, then the PDBR passed its second test.

If a hypothetical PDBR correctly translates into the GDTR and the IDTR, then the value is presumed to be the PDBR and is written to the CR**3** area within the segment E**000**H data structure. If, on the other hand, the hypothetical CR**3** fails either test, then the routine starts again, searching system memory for another BIOS code segment page translation table, which might lead to a valid CR**3**.

PCD and PWT are always assumed to be fixed at **00**H for normal planar operation. These values are set to zero and written with the PDBR in the CR**3** area within the segment E**000**H data structure.

Once CR**3** has been estimated, the LDTR is estimated, at **708**. The LDTR can be estimated given that CR**3** has been estimated, knowing that the LDT is somewhere within the GDT, and knowing that the LDT must be present in memory. To estimate the LDTR, the GDT is searched for an LDT that is marked present. The first LDT that is present in physical memory (tested using the translation routine explained in the text accompanying task **706**) and is marked present is presumed to be the table to which the LDTR points. The physical address of the start of that table is saved to the LDTR area in the segment E**000**H data structure.

The above method of estimating LDTR is believed to be reliable enough to be useful, even though under OS/2 more than one LDT can be marked present and present in physical memory. EMM386 is a common Virtual 8086 Mode routine and, therefore, might seemingly cause problems; however, CR**3** and LDTR for EMM386 are easy to estimate because EMM386 only has one CR**3** and one LDTR.

Once CR**3** and LDTR have been estimated, the TR is estimated, at **710**. Essentially, each task selector entry within the GDT and the LDT are searched for a task state selector with the busy bit set. The type field for each entry is tested to see if it is either a busy 80286 task state selector or a busy 80486 task state selector. The first entry with either a busy **286** TSS or a busy **486** TSS is presumed to be the address to which the TR points. The physical address of the entry with the busy **286** or **486** TSS is saved to the TR area within the segment E**000**H data structure. If no entry has a busy **286** or **486** TSS, then the zero is saved to the TR area within the segment E**000**H data structure.

Having estimated CR**3**, LDTR, and TR, the code continues at task **712**. At **712**, if the TR points to a valid TSS, then the busy bit in the TSS pointed to by the TR is cleared, at **714**. Either way, the code continues at **716**, where DS, ES, FS, and GS are loaded with the selector valid for the GDT. Then CR**3** and CR**0** are loaded with the values from the segment E**000**H data structure, at **718**. Next, paging is enabled, at **720**, so the only area for which linear addresses equal physical addresses is the area in segments E**000**H and F**000**H. Then, IDTR, GDTR, LDTR, and TR are loaded with the values stored in the segment E**000**H data structure, at **722**.

Finally, a Virtual 8086 Interrupt Stack is created at **724** and **726** by pushing values corresponding to GS, FS, DS, ES, SS, ESP, EFLAGS (after setting the VM bit), and CS from the segment E**000**H data structure onto the Stack. Also, a return address corresponding to the code at task **730** is pushed onto the stack at **726**. Lastly, an IRETD instruction is executed to place the CPU **40** back into Virtual 8086 Mode and transfer execution to the code corresponding to task **730**.

Task **730** starts the common thread, which is used by each of the various threads in FIG. **14**. At task **730**, the coprocessor **44** is restored from the values saved in the segment E**000**H data structure. Next, the state of Address Line **20** (I/O port **92**H) is popped from the Stack, at **732**. Task **732** is also the point to which the SMI-based CPU save state routine jumps (see task **1046**). Then, Shadow RAM segment E**000**H is made read-only again, at **734**. At **736**, the APM is connected to the hardware by restarting the failsafe timer, as described in the text accompanying FIGS. **6**A and **19**. Then, Shadow RAM segments E**000**H and F**000**H are made read-only again, at **738**. Finally, at **740**, the Restore CPU State Routine sets a flag indicating that a normal resume occurred. Tasks **742**, **744**, and **746** are not executed by the Restore CPU State Routine, but are merely used to show that at some time prior to returning to the code that was interrupted by the suspend event, the eight general registers are popped off the Stack, maskable interrupts are enabled (if they were enabled when the code was interrupted), and the flags are popped off the stack. Lastly, the Restore CPU State Routine returns to the Supervisor Routine, which returns control back to the APM, which updates any stale system values and returns control back to the code that was interrupted.

Referring back now to task **704**, if the CPU **40** was not in Virtual 8086 mode when it was interrupted, then the code follows a path from **750** through **792**, where the code merges with the common thread of tasks **730** through **748**. At **750**, if the TR value in the segment E**000**H data structure indicates that the TR points to a valid TSS, then the busy bit in that TSS is cleared at **752**. In either case, next, at **754**, the GDTR and CR**0** are loaded with values from the segment E**000**H data structure.

Then a dummy page directory table and page translation table are loaded into segment E**000**H, at tasks **756** through **764**. First, Shadow RAM segment E**000**H is made read/write, at **756**. Second, a new page directory table is created at address **0E0000**H, at **758**. Third, the first entry in that new page directory table is modified to point to **0E1000**H, at **760**. Fourth, a new page translation table is created at **0E1000**H such that addresses **0E0000** through **0FFFFF** are present and linear addresses equal physical addresses for this address range, at **762**. Lastly, the page directory base register in CR**3** is loaded with **0E0000**H so that address translations are made through the new dummy page directory and page translation table in **0E0000**H. Paging was reactivated (if applicable) when CR**0** was loaded at task **754**.

Next, Shadow RAM segments E**000**H and F**000**H are made read/write, at **766**. Then, if the CPU **40** was executing 16-bit code when it was suspended, then it was in 16-Bit Mode and an offset pointing to a 16-bit code path is saved to the segment E**000**H data structure, at **770**. On the other hand, if the CPU **40** was not in 16-Bit Mode, then it was in 32-Bit Mode and an offset pointing to a 32-bit code path is saved to the segment E**000**H data structure, at **772**, instead of the 16-bit offset. In either event, these code paths are parallel and differ only in that one uses 16-bit operands and the other uses 32-bit operands. Tasks **770** and **772** merely set up the offset into either of the parallel paths. One of the paths (the one corresponding to the offset) is entered at task **782** below.

Next, at **774**, the CR3 value from the segment E000H data structure is loaded into EDX, the SS value from the segment E000H data structure is loaded into CX, the ESP value from the segment E000H data structure is loaded into EBP, the TR value from the segment E000H data structure is loaded into the upper half of ESI, and the LDTR value from the segment E000H data structure is loaded into the lower half of ESI (SI). These values are shifted into their proper locations below. Then, GDTR, LDTR, and CR0 are loaded with their values from the segment E000H data structure, at **776**. At **778**, LDTR is loaded with the LDTR value stored in SI. Then the code far jumps to the offset placed in either task **770** or **772**. The far jump is coded by directly placing the opcode into the source code and using the offset from either **770** or **772**. The code then continues in either a 16-bit opcode path or a 32-bit opcode path, at **782**.

Next CR3 is loaded with the CR3 value stored in EDX, SS is loaded with the SS value stored in CX, and ESP is loaded with the ESP value stored in EBP, at **784**. Then GS, FS, ES, and DS are popped off the stack, at **786**. At **788**, if the interrupted CPU **40** was executing code in protected mode, then the TR is loaded with the TR value stored in the upper half of ESI, at **790**. In either case, the code continues at task **792**, where the debug registers DR0, DR1, DR2, DR3, DR6, and DR7 are popped off the Stack.

At this point, this code path merges with the common code path of tasks **730** through **748**, which were explained above. At **794**, the error-recovery routine also joins the common code path from task **640** of the Save CPU State Routine.

Referring now to FIG. **15**, a flow chart of the Save 8259 State Routine is shown starting at **800**. Saving the states of the 8259s proceeds with saving the periodic interrupt values used by the real-time clock **98**, at **802**, and the saving of all other readable registers, at **804**, to the segment E000H data structure. The architecture of the computer system **10** requires certain 8259 read-only registers to have fixed values, as is well known in the art. These values are known and need not be determined. The 8259 values that are difficult to obtain are the 8259 base address, the 8259 slave address, and whether the two 8259s are set to show pending or in-service interrupts by the OS.

The four above items are ascertained with the remaining code in FIG. **15**. At **806** the 8259 is masked leaving only the keyboard **12** and mouse **13** interrupts unmasked.

Next, the interrupt vector table is saved by copying the bottom 1K of physical memory to a segment E000H data structure, at **808**. Then, at **810**, a new "dummy" interrupt vector table is loaded into the bottom 1K of physical memory by loading **256** unique dummy vectors that point to **256** dummy interrupt service routines, which start in segment C800H. At **812**, the 256 dummy interrupt service routines are generated in segment C800H.

Then keyboard **12** and mouse **13** interrupts are disabled at **814**. Any unacknowledged keyboard **12** and mouse **13** interrupts are acknowledged, at **816**.

A keyboard interrupt is then generated, at **818**, and the interrupt is tested to see if the base 8259 is set to be pending or in-service, at **820**. This value is then written to the segment E000H data structure. At **822**, the code waits for the interrupt to be serviced. The interrupt is serviced, at **824**, by calling one of the dummy service routines. Calling the dummy service routine determines the 8259 base address and determines if the 8259 was in pending or in-service mode; the base address and mode are saved to the segment E000H data structure.

A similar procedure is performed for the slave 8259 at tasks **826**, **828**, **830**, and **832**.

At **834**, the interrupt vector table is restored by copying the values from the E000H data structure back to the lower 1K of physical memory. Then segment E000H is made read-only again, at **836**, and all interrupts are masked, at **838**, in preparation for returning to the calling program, at **840**.

Referring now to FIG. **16**, the routine used to dynamically allocate the Suspend File is shown. As indicated in the text accompanying task **1012**, the Suspend File allocated in the FAT should be contiguous sectors to allow for rapid writes to disk and rapid reads from disk during suspends and resumes, respectively. Also, as is evident to those skilled in the art, the Suspend File must be large enough to store the compressed contents of the entire system state.

To these ends, the routine to dynamically allocate the Suspend begins at **1050**. This routine is executed by the OS each time the system boots without executing the Resume Routine and should be executed after memory is added to the system. First, the Allocation Routine shown in FIG. **16** tests whether the power management circuit is present, at **1052**, by checking a flag in CMOS NVRAM. If no power management hardware **106** is present, then the program exits, at **1054**. If power management hardware **106** is present, then the routine checks to see if a Resume is pending, at **1056**. If so, the program exits, at **1058**.

If a resume is not pending, then the Allocation Routine next tests whether a Save File Partition exists, at **1060**. If a Save File Partition exists, then the program exits, at **1062**, under the assumption that the partition is large enough to store the entire system state.

If a Save File Partition is not present, then a file must be allocated in the FAT for the Safe File. First, the size of the file is determined, at **1064**. This is calculated by adding the size of the system RAM **53**, the size of the video memory **58**, the size of any other devices having a large volatile memory capacity, and a 64 kilobyte area for storing values in the registers of the various devices, such as the CPU **40**.

After the size of the required Save File is calculated, the Allocation Routine next attempts to allocate the Save File in the FAT, at **1066**. If there is not enough storage space available on the hard drive **31**, the Allocation Routine calls a routine, at **1070**, to increase the size of the available space on the hard drive **31**, if possible.

DOS calls cannot guarantee contiguous sectors in a file. Therefore, if the hard drive **31** has enough space to store the Save File, the Allocation Routine next determines if that space is contiguous, at **1072**. If the Save File is fragmented (not contiguous) then the Allocation Routine calls a routine, at **1074**, to defragment the hard drive to provide a contiguous file for the Save File, if possible.

If the Save File is not fragmented, then the Allocation Routine next writes the signature ("PS/1 Power Management") to the first sector of the Save File, at **1076**. Then the Allocation Routine converts the DOS handle for the file to physical cylinder, head, & sector for the BIOS, and writes these values to the CMOS NVRAM, at **1078**. Finally, the Allocation Routine exits, at **1080**.

The routine to defragment the hard drive **31**, which was called at **1074**, begins at task **1082** and continues through task **1094**. First the hard drive **31** is tested, at **1084**, to determine if it is compressed using one of the hard drive compression routines, which are known to those skilled in the art.

If the hard drive **31** is not compressed, next the entire hard drive **31** is defragmented using a defragmenting utility, which are known to those skilled in the art, at **1086**. Thereafter, the routine returns, at **1088**, to begin anew the allocation portion of the Allocation Routine, at **1090**.

Qualcomm Ex. 1008 - 81/84

If the hard drive **31** is compressed, then the compressed portion of the hard disk is minimized, at **1092**. Thereafter, the uncompressed portion of the hard drive **31** is defragmented using a defragmenting utility, which are known to those skilled in the art, at **1094**. Thereafter, the routine returns, at **1088**, to begin anew the allocation portion of the Allocation Routine, at **1090**.

The routine to increase the space available on the hard drive **31**, which was called at **1070**, begins at task **1100** and continues through task **1110**. First the hard drive **31** is tested, at **1102**, to determine if it is compressed using one of the hard drive compression routines, which are known to those skilled in the art.

If the hard drive **31** is not compressed, then the hard drive **31** does not have enough space available for the Save File and a message is displayed, at **1104**, informing the user that to use the suspend and resume features, the user must either add additional hard drive capacity or delete files from the hard drive **31**.

If the hard drive **31** is compressed, then next the size of the uncompressed portion of the hard drive **31** is increased, if possible, at **1108**. Thereafter, the routine returns, at **1110**, to begin anew the allocation portion of the Allocation Routine, at **1090**.

Referring now to FIG. **17**, the routine to exit the standby state is shown, starting at **1120**. Conceptually, as the system exits the standby state **152**, the system reverses the changes caused as the system transitioned from the normal operating state **150** to the standby state **152**. In short, as the system exits the standby state **152**, the system restores the video signal, illuminates the LED **23**, spins up the hard disk within the hard drive **31**, restores the system clock, disables APM CPU Idle calls so that CPU Idle calls from the APM driver no longer halt the CPU **40**, and clears a flag indicating that the system **10** is in the Standby State **152**.

First, the routine tests, at **1122**, if a Checkpoint was generated as the system entered the standby state **152**. If so, the Checkpoint taken bit is cleared, at **1124**, to indicate that the Checkpoint is no longer valid. In this particular embodiment, the Checkpoint is invalidated as the system exits standby. Checkpoint data is only used to resume the system if the system fails WHILE in the standby state **152**, because most systems use virtual swap files on the hard drive and resuming from the Checkpoint data could put the machine into a state in which the swap file is completely different from that expected by the system state stored as Checkpoint data. In the alternative, the Checkpoint data can be invalidated after the next disk access. In another alternative, the Checkpoint data could be invalidated after a disk access to a file that might cause system problems if the system were resumed from the Checkpoint data. In yet another alternative, the Checkpoint data could be available to users at all times with the understanding that resuming from the Checkpoint data might cause some or all of the data on the hard drive **31** to be lost.

Thereafter, and if no Checkpoint was taken, the CPU **40**, at **1126**: commands the microcontroller U2 to (i) cause the video controller **56** to start generating the video signal once again, (ii) cause the clock synthesizer **906** to resume the system clock's higher frequency (25 MHz or 33 MHz), and (iii) illuminate the LED **23**. Then, at **1128**, the CPU **40** writes an appropriate value to the fixed disk controller **86** to cause the hard disk within the hard drive **31** to start spinning. Next, APM CPU Idle calls are disabled so that CPU halts do not occur, at **1130**. Finally, the Standby Flag is cleared, at **1132**, indicating that the system **10** is in the normal operating state **150**, and the routine returns to the calling program, at **1140**.

Referring now to FIG. **18**, the routine to enter the standby state is shown, starting at **1140**. In short, as the system enters the standby state **152**, the system blanks the video signal, flashes the LED **23**, spins down the hard disk within the hard drive **31**, slows the system clock, enables APM CPU Idle calls so that CPU Idle calls from the APM driver halt the CPU **40**, and sets a flag indicating that the system **10** is in the Standby State **152**.

First, the routine tests, at **1142**, if a Checkpoint is to be taken. If so, most of the Suspend Routine is executed, at **1144**, so that the state of the computer system **10** is stored on the hard drive **31**. In the present embodiment, a Checkpoint is taken as the system enters standby. In the alternative, a Checkpoint can be periodically taken and used to resume the system, with the cautions discussed in the text accompanying FIG. **17**. Then, at **1146**, enough of the Resume Routine is executed to recover from the partial Suspend taken at **1144**. Then the Checkpoint taken bit is SET, at **1148**, to indicate that a valid Checkpoint was taken. Recall that in this embodiment, the Checkpoint data is only used if the system fails WHILE in the standby state **152**. In this event, as the system boots, it resumes from the saved Checkpoint.

Ideally, the Checkpoint should be totally transparent to the system. As such, the checkpoint should be aborted if a hardware interrupt occurs to prevent data loss. In the alternative, as with a normal suspend, any hardware interrupts can be ignored.

Thereafter, and if no Checkpoint was to be taken, the CPU **40**, at **1150**: commands the microcontroller U2 to (i) cause the video controller **56** to stop generating the video signal, (ii) cause the clock synthesizer **906** to slow the system clock from its higher frequency (25 MHz or 33 MHz) to 8 MHz, and (iii) flash the LED **23**. Then, at **1152**, the CPU **40** writes an appropriate value to the fixed disk controller **86** to cause the hard disk within the hard drive **31** to stop spinning. Next, APM CPU Idle calls are enabled so that CPU Idle calls from the APM driver halt the CPU **40**, at **1154**. Finally, the Standby Flag is SET, at **1156**, indicating that the system **10** is in the standby state **152**, and the routine returns to the calling program, at **1158**.

While the present invention has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. For example, many of the tasks performed by the power management circuit **106**, such as hardware monitoring of one or more interrupts, can be built into the system chipset. Therefore, the invention in its broader aspects is not limited to the specific details, representative apparatus and method, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant's general inventive concept.

What is claimed is:

1. A computer system capable of operating in at least two

Qualcomm Ex. 1008 - 82/84

states of power management, a normal operating state in which code is executed normally by said computer system and an off state the system comprising:

(a) a central processing unit (CPU) capable of executing said code;

(b) a power management processor in circuit communication with said CPU;

(c) a modem in circuit communication with said power management processor;

(d) a real time clock in circuit communication with said power management processor:

(e) a timer in circuit communication with said power management processor and configurable by a user to expire after a predetermined period of time;

(f) a power supply in circuit communication with said CPU and said power management processor comprising circuitry for selectively providing system power from an external source to said computer system responsive to said power management processor, characterized by having a first power supply state and a second power supply state and further characterized by having circuitry for providing auxiliary power to said power management processor;

wherein said first power supply state is characterized by said power supply providing system power to said computer system from said external source and auxiliary power to said power management processor from said external source, said normal operating state being characterized in that said power supply is in said first power supply state; and

wherein said second power supply state is characterized by said power supply not providing system power to said computer system from said external source and said power supply providing auxiliary power to said power management processor from said external source, said off state being characterized in that said power supply is in said second power supply state; and

(g) a switch, in circuit communication with said power management processor;

wherein said power management processor is further characterized by causing said power supply to transition from said second power supply state to said first power supply state responsive to a closure event of said switch, a ring detected via said modem, or the expiration of said timer.

2. A computer system according to claim **1** further comprising a glitch circuit in circuit communication with said power management processor and said power supply and characterized by resetting said power management processor responsive to detecting a glitch in the auxiliary power to said power management processor.

3. A computer system according to claim **2** wherein said glitch circuit comprises circuitry for interfacing between a reset driving signal line, a power signal line, a ground line, and an electronic device having a reset input, said circuitry comprising:

(a) a first resistor in circuit communication with the reset driving input line and a first node;

(b) a first capacitor in circuit communication with the power signal line and the first node;

(c) a second resistor in circuit communication with the first node and the ground line;

(d) a first transistor in circuit communication with the first node, the ground line, and a second node;

(e) a third resistor in circuit communication with a reference voltage and the second node;

(f) a second capacitor in circuit communication with the second node and the ground line; and

(g) a second transistor in circuit communication with the second node, the ground line, and the reset input line of the electronic device; and

(1) wherein responsive to the power signal decreasing and increasing by a predetermined amount, the reset signal is asserted by said second transistor for a period of time determined by said second capacitor and said third resistor.

4. A computer system according to claim **1** further comprising an override circuit in circuit communication with said switch and said power supply and configured to cause said power supply to transition to said first power supply state regardless of the attempted control by said power management processor of said power supply.

5. A computer system according to claim **1** wherein said power management processor is further characterized by communicating to said CPU, after causing said power supply to transition from said second Dower supply state to said first power supply state, whether the transition was caused by a closure event of said switch, a ring detected via said modem, or the expiration of said timer.

6. A computer system according to claim **5** wherein the code executing on said CPU performs a first set of tasks, a second set of tasks or a third set of tasks depending on whether said power management processor communicated to said CPU that the transition from said second power supply state to said first power supply state was caused by a closure event of said switch, a ring detected via said modem, or the expiration of said timer respectively, each one of said three sets of tasks includes at least one task which is different than the tasks performed by said other two sets of tasks.

7. A computer system according to claim **1** wherein:

(a) said power supply is further characterized by having a third power supply state;

(b) said third power supply state is characterized by said power supply not providing system power to said computer system from said external source and said power supply not providing auxiliary power to said power management processor from said external source; and

(c) said power management processor is further characterized by communicating to said CPU whether the transition from said second power supply state to said first power supply state was caused by a closure event of said switch, a ring detected via said modem, the expiration of said timer, or the transition of said power supply from said third power supply state to said first power supply state.

8. A computer system according to claim **7** wherein the code executing on said CPU performs a first set of tasks, a second set of tasks, a third set of tasks or a fourth set of tasks depending on whether said power management processor communicated to said CPU that the transition from said second power supply state to said first power supply state was caused by a closure event of said switch, a ring detected via said modem, the expiration of said timer, or the transition of said power supply from said third power supply state to said first power supply state respectively, each one of said

four sets of tasks includes at least one task which is different than the tasks performed by said other three sets of tasks.

9. A computer system according to claim **1** wherein said power management processor comprises a preprogrammed microcontroller.

10. A computer system according to claim **1**, wherein:

(a) said computer system is further capable of operating in a third state of power management, a suspend state, said off state being further characterized in that the code executing on said CPU has been irreversibly interrupted,

said suspend state being characterized in that said power supply is in said second power supply state and the code executing on said CPU has been reversibly interrupted such that the execution of the code on said CPU is resumed after said power supply changes to said first power supply state.

11. A computer system according to claim **1**, wherein said predetermined period of time is in a range of between one second and thirty two years.

* * * * *