

PCT/CA 2006/001040
23 OCTOBER 2006 23-10-06

PA 1511989

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 08, 2006

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/693,502

FILING DATE: June 24, 2005

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS US60/693,502

By Authority of the

**Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office**




M. K. CARTER
Certifying Officer



01789 U.S. PTO

Please type a plus (+) inside this box →

+

PTO/SB/16 (8-00)

Approved for use through 10/31/2002, OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB Control number

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT UNDER 37 C.F.R. § 1.53©

112948 U.S. PTO
60/693502



062405

INVENTOR(S)					
Given Name (first and middle [if any])		Family Name or Surname		Residence (City and either State or Foreign Country)	
JOSEPH JIM RICHARD		ELKU FRASER GRATTON		123 Glandale Drive South, Tillsonburg, Ontario, Canada N4G 5V9 54 Rosebery Place, St. Thomas, Ontario, Canada N5R 2H7 132 St. Clair Crescent, London, Ontario, Canada N6J 3V9	
☐ Additional inventors are being named on the separately numbered sheets attached hereto					
RADIATION LAMP AND RADIATION SOURCE MODULE INCORPORATING SAME					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
☒ Customer Number		27160		Place Customer Number Bar Code Label here	
Customer Number 27160					
☐ Firm or Individual Name					
Address					
Address					
City		State		Zip	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
☒ Specification Number of Pages		20		☐ (CD(s), Number	
☒ Drawings Number of Sheets		8		☐ Other (specify)	
☒ Application Data Sheet. See 37 C.F.R. § 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
☐ Applicant claims small entity status. See 37 C.F.R. § 1.27.					
☐ A check or money order is enclosed to cover the filing fees.					
☒ The Commissioner is hereby authorized to charge the above-identified fee and any deficiency in filing fees or credit any overpayment to Deposit				Filing Fee Amount (\$)	
Account No.: 50-1710				\$200.00	
☐ Payment by credit card. From PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
☒ No.					
☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

Dawn C. Hayes

TYPED or PRINTED NAME DAWN C. HAYES

TELEPHONE (202) 625-3549

Date: 06/24/05

REGISTRATION NO. 44,751
(If appropriate)

Docket Number 213202.00535

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 C.F.R. § 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. § 122 and 37 C.F.R. § 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

PROVISIONAL APPLICATION COVER SHEET
Additional Page

PTO/SB/16 (8-00)

Approved for use through 10/31/2002, OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

Docket Number		Type a plus sign (+) inside this box →	+
INVENTOR(S)/APPLICANT(S)			
Given Name (first and middle [if any])	Family or Surname	Residence (City and either State or Foreign Country)	

Page 2 of 4

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

APPLICATION DATA SHEET

Inventor One Given Name:: JOSEPH
Family Name:: ELKU
Postal Address Line One:: 123 Glandale Drive South
City:: Tillsonburg
State or Province:: Ontario
Country:: Canada
Postal or Zip Code:: N4G 5V9
City of Residence:: Tillsonburg
State or Province of Residence:: Ontario
Country of Residence:: Canada
Citizenship Country:: Canada

Inventor Two Given Name:: JIM
Family Name:: FRASER
Postal Address Line One:: 54 Rosebery Place
City:: St. Thomas
State or Province:: Ontario
Country:: Canada
Postal or Zip Code:: N5R 2H7
City of Residence:: St. Thomas
State or Province of Residence:: Ontario
Country of Residence:: Canada
Citizenship Country:: Canada

Inventor Three Given Name:: RICHARD
Family Name:: GRATTON
Postal Address Line One:: 132 St. Clair Crescent
City:: London
State or Province:: Ontario
Country:: Canada
Postal or Zip Code:: N6J 3V9
City of Residence:: London
State or Province of Residence:: Ontario
Country of Residence:: Canada
Citizenship Country:: Canada

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 27160
Fax:: (312) 902-1061

Gowlings Ref: T8468931US
Trojan Ref: Angular Lamp Base

FINAL VERSION

Applicants/Inventors: Joseph Elku
Jim Fraser
Richard Gratton

Title: Radiation Lamp and Radiation Source Module
Incorporating Same

Assignee: Trojan Technologies Inc.

JURISDICTION: United States - Provisional

DATE: June 24, 2005
TOR_LAW\6061506\1

APPLICATION INFORMATION

Title Line One:: RADIATION LAMP AND RADIATION SOURCE MODULE INCORPORATING SAME
Total Drawing Sheets:: Eight (8)
Informal Drawings?:: No
Application Type:: Provisional
Docket Number:: 213202.00535
Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 27160

PRIOR FOREIGN OR US APPLICATIONS

U.S. Application One::
Filing Date::
U.S. Application Two::
Filing Date::

Page 4 of 4

CROSS-REFERENCE TO RELATED APPLICATION

[0001] None.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0002] In one of its aspects, the present invention relates to a lamp device. In another of its aspects, the present invention relates to a radiation lamp. In yet another of its aspects, the present invention relates to a radiation source assembly. In yet another of its aspects, the present invention relates to a radiation source module. In yet another of its aspects, the present invention relates to a fluid treatment system. In yet another of its aspects, the present invention relates to a water disinfection system.

DESCRIPTION OF THE PRIOR ART

[0003] Fluid treatment systems such as water disinfection systems are generally known in the art.

[0004] See, for example, one or more of the following United States patents:

Re36,896,
3,418,370,
4,482,809,
4,872,980,
5,006,244,
5,471,063,
5,504,355,
5,538,210,
6,342,188,
6,500,346,

6,507,028,

6,646,269,

6,674,084,

6,803,586, and

6,863,078.

[0005] Many of the above-identified United States patents teach fluid treatment systems that employ ultraviolet (UV) radiation to kill, sterilize and/or prevent replication of microorganisms (bacteria, viruses, pathogens and the like) that may be present in the fluid.

[0006] Generally, such prior art fluid treatment systems employ an ultraviolet radiation lamp to emit radiation of a particular wavelength or range of wavelengths (usually between 185 and 400 nm) to kill, sterilize and/or prevent replication of microorganisms (bacteria, viruses, pathogens and the like) that may be present in the fluid.

[0007] Conventional ultraviolet radiation lamps include low pressure lamps, medium pressure lamps, low pressure high output lamps and the like.

[0008] In more recent years, it has become conventional to use such ultraviolet lamps configured to have all of the electrical connections disposed at one end of the lamp. See, for example, Figures 2-8 of United States patent 4,700,101 [Ellner et al. (Ellner)] and Figures 1, 2 and 4 of United States patent 5,166,527 [Solymar].

[0009] As can be seen from the prior art radiation lamps taught by Ellner and Solymar, the electrical connection pins are elongate and are disposed such that the axes of the pins are parallel with the longitudinal axes of radiation lamp. In other words, the electrical connection is made by pushing an end cap or other connection base on to the pins in a direction parallel to the longitudinal axis of the radiation lamp.

[0010] The problem with this approach is that in many applications, the radiation lamp is immersed in a flow of water and turbulence created within that water treatment system invariably imparts a vibratory motion to the lamps which frequently results in lamps being vibrated or shaken loose of its electrical connection base or socket thereby causing the lamps to be rendered completely or intermittently inoperative. When such an event occurs, the water being treated may not be fully disinfected.

[0011] More recently, the prior art has attempted to address this problem by using a relatively complicated mechanical connection (e.g., a so-called "push-and-twist" connection) to secure the lamp to the connection base. See, for example, United States patent 5,422,487 [Sauska et al (Sauska)] and United States patent 6,884,103 [Kovacs]. The problem with these approaches is the complexity of the mechanical connection between the lamp and the base unit requiring the use of springs, specialized connection lugs and the like. Further, a connection system which is predicated on a dual motion system such that pushing and twisting gives rise to a higher incidents of lamp breakage and other damage to the module by field personal.

[0012] Accordingly, there remains the need in the art for a lamp device, particularly a radiation lamp, which will provide a reliable electric connection on the one hand, yet be relatively inexpensive, uncomplicated and simple to implement on the other hand.

SUMMARY OF THE INVENTION

[0013] It is an object of the present invention to obviate or mitigate at least one of the above-mentioned disadvantages of the prior art.

[0014] Accordingly, in one of its aspects, the present invention provides a lamp device comprising a longitudinal axis, a first elongate electrical connector and a second elongate electrical connector, each of the first elongate electrical connector and the second elongate connector being non-parallel with respect to the longitudinal axis.

[0015] In another of its aspects, the present invention relates to a radiation source assembly comprising such a lamp device, together with a radiation transparent protective sleeve.

[0016] In another of its aspects, the present invention provides a radiation lamp comprising: an elongate radiation-emitting cavity having a longitudinal axis; a first electrical connection base disposed at a first end of the elongate radiation-emitting cavity; a pair of first elongate electrical connectors and a pair of second elongate electrical connectors disposed in the first electrical connection base; each of the first elongate electrical connector and the second elongate connector being non-parallel with respect to the longitudinal axis.

[0017] In yet another of its aspects, the present invention provides a radiation source module comprising such a radiation lamp and a first support member for supporting the radiation lamp, the first support member comprising a second electrical connection base for engagement with the first electrical connection base and connection to a power supply.

[0018] Other aspects of the present invention relate to fluid treatment systems and water disinfection systems incorporating the above lamp device, radiation source assembly, radiation lamp and radiation source module, respectively.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Embodiments of the present invention will be described with reference to the accompanying drawings, wherein like reference numerals denote like parts, and in which:

Figures 1-4 illustrate components of a first preferred embodiment of the present lamp device; and

Figures 5-8 illustrate portions of a second preferred embodiment of the present lamp device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] Preferred embodiments of the present invention will be described below with reference to Figures 1-8. In Figures 1-8, there is shown in detail the electrical connection portion of a radiation lamp and/or the connection thereof to a complementary base unit. The remaining detail of the lamp is not shown for easier understanding. However, those

of skill in the art will readily recognize how the specific connection shown in the Figures can be implemented in a lamp design by reference to the various prior art patents referred to above.

[0021] With reference to Figures 1-4, there is illustrated a first electrical base unit 100 and a second electrical base unit 150.

[0022] First electrical connection base unit 100 comprises a housing 102. An end portion 104 of unit 100 comprises a first pair of electrical connectors 106 and a second pair of electrical connectors 108.

[0023] In portion 104 comprises an undulating shape having a series of peaks 110 and valleys 112. Electrical connectors 106,108 are connected to wire or other suitable electrical conveyance (not shown) disposed within housing 102 which is then connected to the radiation-emitting cavity of a lamp in a conventional manner.

[0024] With particular reference to Figure 2, there is illustrated an enlarged view of base unit 150. As shown, base unit 150 comprises a first pair of electrical receptacles 152 and a second pair of electrical receptacles 154. These receptacles are disposed at a first end portion 156 of base unit 150. Disposed at another end portion 158 of base unit 150 is a sealing system which functions in a manner similar to that described in United States patents 4,872,980 and 5,006,244 referred to above. Specifically, end portion 158 comprises a pair of annular seals 160 that serve to seal the interior of a radiation transparent protective sleeve (Figure 4) placed over the radiation lamp.

[0025] Also disposed on end portion 158 is a stop portion 162 that serves as stop for the open end of protective sleeves surrounding the lamp.

[0026] Portion 158 further comprises a pair of annular seals 164 that serve to seal against water ingress into the frame of a module in which the lamp is placed (again, reference can be made to United States patent 4,872,980 and 5,006,244 for further details on the function of the seals).

[0027] Electrical receptacles 152,154 are wired in a conventional manner with the electrical wires or other electrical conveyance emerging from an aperture 166 in end portion 158 connection unit 150.

[0028] With particular reference to Figure 3, it will be seen that when base unit 100 is connected to the remaining components of the radiation lamp, there will be a longitudinal axes shown at line A through base unit 100 and the remainder of the lamp. Further, it will be seen that electrical connector 106,108 are elongate and have a longitudinal axis through line B. An important feature of this preferred embodiment is that line B is non-parallel with respect to line A. In other words, the longitudinal axes through electrical connectors 106,108 is in a non-parallel relationship with the longitudinal axes through base unit 100 and the remainder of the radiation lamp. In the specific embodiment shown, electrical connectors 106,108 are disposed at an acute angle α toward the radiation-emitting cavity (not shown) of the lamp.

[0029] When it is desired to engage base unit 100 with base unit 150, the base units are aligned as shown in Figure 3 and moved with respect to one another in the direction of arrow C. The engaged components are shown in Figure 4 and a radiation transparent protective sleeve 170 encases the connected units 100 and 150. As will be appreciated by those of skill in the art, once the connection is shown as made in Figure 4, the connection will withstand vibration forces conveyed to the radiation lamp. Specifically, base unit 100 will not separate from base unit 150 in a direction of arrow D, particularly when radiation transparent protective sleeve 170 is disposed over the connection.

[0030] With reference to Figures 5-8, there is illustrated a second embodiment of the preferred invention. In the description of Figures 5-8, reference numerals will be used wherein the last two digits correspond to the same relevance appearing in Figures 1-4 and the first numeral will be "2" in Figures 5-8 instead of "1" in Figures 1-4. Thus, it will be seen that a first major difference between the two embodiments is that the embodiment illustrated in Figures 5-8 comprises electrical connectors 206,208 that are angled away (β) from the radiation-emitting cavity. Another difference is that the cross-sectional shape base unit 200 in Figures 5-8 comprises a single valley 212 instead of the pair of

valleys 112 in the embodiment illustrated in Figures 1-4. Yet another difference is that the cross-sectional shape base unit 200 in Figures 5-8 comprises a single peak 210 instead of the pair of valleys 110 in the embodiment illustrated in Figures 1-4. Otherwise, the embodiment shown in Figures 5-8 may be used in a manner similar to that described above with respect to Figures 1-4.

[0031] While this invention has been described with reference to illustrative embodiments and examples, the description is not intended to be construed in a limiting sense. Thus, various modifications of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to this description. For example, it is possible to reverse the arrangement of electrical connectors and electrical receptacles in the illustrated embodiments – i.e., the electrical connectors would be disposed in electrical connection base unit 150,250 and the electrical receptacles would be disposed in electrical connection base unit 100,200. Also, it is possible to have a mixture of electrical connectors and electrical receptacles on electrical connection base unit 100,200 and a complementary mixture of electrical connectors and electrical receptacles on electrical connection base unit 150,250. Yet another possible modification of the illustrated embodiments relates to disposed the electrical connectors such that the longitudinal axis thereof is substantially orthogonal to the longitudinal axis of the radiation lamp (i.e., $\alpha \approx 90^\circ$ and $\beta \approx 90^\circ$). Yet another modification of the illustrated embodiments relates to the use of electrical connection bases that, in cross-section contain no peaks or valleys. It is therefore contemplated that the appended claims will cover any such modifications or embodiments.

[0032] All publications, patents and patent applications referred to herein are incorporated by reference in their entirety to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated by reference in its entirety.

What is claimed is:

1. A lamp device comprising a longitudinal axis, a first elongate electrical connector and a second elongate electrical connector, each of the first elongate electrical connector and the second elongate connector being non-parallel with respect to the longitudinal axis.
2. The lamp device defined in Claim 2, wherein the first elongate electrical connector and the second elongate electrical connector are substantially parallel with respect to one another.
3. The lamp device defined in any one of Claims 1-2, wherein the first elongate electrical connector and the second elongate connector are in a spaced relationship along the longitudinal axis.
4. The lamp device defined in any one of Claims 1-2, wherein the first elongate electrical connector and the second elongate electrical connector are aligned in a spaced relationship along the longitudinal axis.
5. The lamp device defined in any one of Claims 1-4, wherein the first elongate electrical connector and the second elongate connector are disposed in a base portion at one end of the lamp device.
6. The lamp device defined in Claim 4, wherein a cross-section of the base portion containing the longitudinal axis comprises an undulating shape.
7. The lamp device defined in Claim 4, wherein a cross-section of the base portion containing the longitudinal axis comprises at least one peak and at least one valley.
8. The lamp device defined in Claim 7, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to the at least one peak or the at least one valley.

9. The lamp device defined in Claim 7, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to both of the at least one peak and the at least one valley.

10. The lamp device defined in Claim 4, wherein a cross-section of the base portion containing the longitudinal axis comprises a single peak and a single valley.

11. The lamp device defined in Claim 10, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to the single peak or the single valley.

12. The lamp device defined in Claim 10, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to both of the single peak and the single valley.

13. The lamp device defined in Claim 4, wherein a cross-section of the base portion containing the longitudinal axis comprises at a plurality of peaks and a plurality of valleys.

14. The lamp device defined in Claim 13, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to the plurality of peaks or the plurality of valleys.

15. The lamp device defined in Claim 13, wherein the first elongate electrical connector and the second elongate electrical connector are offset with regard to both of the plurality of peaks and the plurality of valleys.

16. The lamp device defined in any one of Claims 1-15, further comprising an elongate radiation emitting cavity comprising the longitudinal axis.

17. The lamp device defined in Claim 16, wherein the first elongate electrical connector and the second elongate connector are angled toward the elongate radiation emitting cavity.

18. The lamp device defined in Claim 16, wherein the first elongate electrical connector and the second elongate connector are angled away from the elongate radiation emitting cavity.

19. The lamp device defined in Claim 16, wherein the first elongate electrical connector and the second elongate connector are disposed in an orthogonal relationship with respect to the longitudinal axis.

20. The lamp device defined in any one of Claims 1-19, wherein at least one of the first elongate electrical connector and the second elongate electrical connector comprises a male portion of a male-female connection system.

21. The lamp device defined in any one of Claims 1-19, wherein both of the first elongate electrical connector and the second elongate electrical connector comprises a male portion of a male-female connection system.

22. The lamp device defined in any one of Claims 1-19, wherein at one of the first elongate electrical connector and the second elongate electrical connector comprises a male portion of a male-female connection system and the other of the first elongate electrical connector and the second elongate electrical connector comprises a female portion of a male-female connection system.

23. The lamp device defined in any one of Claims 1-19, wherein both of the first elongate electrical connector and the second elongate electrical connector comprises a female portion of a male-female connection system.

24. The lamp device defined in any one of Claims 1-24, comprising a pair of first elongate electrical connectors and a pair of second elongate electrical connectors.

25. The lamp device defined in Claim 24, wherein the pair of first elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

26. The lamp device defined in Claim 24, wherein the pair of second elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

27. The lamp device defined in Claim 24, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

28. A radiation lamp comprising: an elongate radiation-emitting cavity having a longitudinal axis; a first electrical connection base disposed at a first end of the elongate radiation-emitting cavity; a pair of first elongate electrical connectors and a pair of second elongate electrical connectors disposed in the first electrical connection base; each of the first elongate electrical connector and the second elongate connector being non-parallel with respect to the longitudinal axis.

29. The radiation lamp defined in Claim 28, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are substantially parallel with respect to one another.

30. The radiation lamp defined in any one of Claims 28-29, wherein the pair of first elongate electrical connectors and the pair of second elongate connectors are in a spaced relationship along the longitudinal axis.

31. The radiation lamp defined in any one of Claims 28-29, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are aligned in a spaced relationship along the longitudinal axis.

32. The radiation lamp defined in any one of Claims 28-31, wherein a cross-section of the first electrical connection base portion containing the longitudinal axis comprises an undulating shape.

33. The radiation lamp defined in any one of Claims 28-31, wherein a cross-section of the first electrical connection base portion containing the longitudinal axis comprises at least one peak and at least one valley.

34. The radiation lamp defined in Claim 33, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to the at least one peak or the at least one valley.

35. The radiation lamp defined in Claim 33, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to both of the at least one peak and the at least one valley.

36. The radiation lamp defined in any one of Claims 28-31, wherein a cross-section of the first electrical connection base portion containing the longitudinal axis comprises a single peak and a single valley.

37. The radiation lamp defined in Claim 36, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to the single peak or the single valley.

38. The radiation lamp defined in Claim 36, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to both of the single peak and the single valley.

39. The radiation lamp defined in any one of Claims 28-31, wherein a cross-section of the first electrical connection base portion containing the longitudinal axis comprises a plurality of peaks and a plurality of valleys.

40. The radiation lamp defined in Claim 39, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to the plurality of peaks or the plurality of valleys.

41. The radiation lamp defined in Claim 39, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are offset with regard to both of the plurality of peaks and the plurality of valleys.

42. The radiation lamp defined in any one of Claims 28-41, wherein the elongate radiation emitting cavity comprises an ultraviolet radiation-emitting cavity.

43. The radiation lamp defined in any one of Claims 28-42, wherein the pair of first elongate electrical connectors and the pair of second elongate connectors are angled toward the elongate radiation emitting cavity.

44. The radiation lamp defined in any one of Claims 28-42, wherein the pair of first elongate electrical connectors and the pair of second elongate connectors are angled away from the elongate radiation emitting cavity.

45. The radiation lamp defined in any one of Claims 28-42, wherein the pair of first elongate electrical connectors and the pair of second elongate connectors are disposed in an orthogonal relationship with respect to the longitudinal axis.

46. The radiation lamp defined in any one of Claims 28-45, wherein at least one of the pair of first elongate electrical connectors comprises a male portion of a male-female connection system.

47. The radiation lamp defined in any one of Claims 28-45, wherein each of the pair of first elongate electrical connectors comprises a male portion or a female portion of a male-female connection system.

48. The radiation lamp defined in any one of Claims 28-45, wherein at least one of the pair of second elongate electrical connectors comprises a male portion of a male-female connection system.

49. The radiation lamp defined in any one of Claims 28-45, wherein each of the pair of second elongate electrical connectors comprises a male portion of a male-female connection system.

50. The radiation lamp defined in any one of Claims 28-45, wherein the pair of the first elongate electrical connectors and the pair of the second elongate electrical connector each comprises a male portion of a male-female connection system.

51. The radiation lamp defined in any one of Claims 28-45, wherein one of the pair of first elongate electrical connectors and the pair of second elongate electrical connectors comprises a male portion of a male-female connection system and the other of the pair of first elongate electrical connectors and the pair of second elongate electrical connectors comprises a female portion of a male-female connection system.

52. The radiation lamp defined in any one of Claims 28-45, wherein at least one of the pair of second elongate electrical connectors comprises a female portion of a male-female connection system.

53. The radiation lamp defined in any one of Claims 28-45, wherein each of the pair of second elongate electrical connectors comprises a female portion of a male-female connection system.

54. The radiation lamp defined in any one of Claims 28-45, wherein the pair of the first elongate electrical connectors and the pair of the second elongate electrical connector each comprises a female portion of a male-female connection system.

55. The radiation lamp defined in Claim 28-54, wherein the pair of first elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

56. The radiation lamp defined in Claim 28-54, wherein the pair of second elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

57. The radiation lamp defined in Claim 28-54, wherein the pair of first elongate electrical connectors and the pair of second elongate electrical connectors are in substantial alignment along a line orthogonal to the longitudinal axis.

58. A radiation source assembly comprising the lamp device defined in any one of Claims 1-27, together with a radiation transparent protective sleeve.

59. A radiation source assembly comprising the radiation lamp defined in any one of Claims 28-57, together with a radiation transparent protective sleeve.

60. The radiation source assembly defined in Claim 59, further comprising a second electrical connection base for engagement with the first electrical connection base and connection to a power supply.

61. The radiation source assembly defined in Claim 60, wherein the first electrical connection base and the second electrical connection base have a substantially complementary shape.

62. The radiation source assembly defined in any one of Claims 60-61, wherein the first electrical connection base and the second electrical connection base are reversibly engageable.

63. The radiation source assembly defined in any one of Claims 60-61, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a direction transverse to the longitudinal axis of the radiation lamp.

64. The radiation source assembly defined in any one of Claims 60-61, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a non-rotational direction transverse to the longitudinal axis of the radiation lamp.

65. The radiation source assembly defined in any one of Claims 60-61, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an acutely angled direction with respect to the longitudinal axis of the radiation lamp.

66. The radiation source assembly defined in any one of Claims 60-61, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an orthogonal direction with respect to the longitudinal axis of the radiation lamp.

67. A radiation source module comprising the radiation lamp defined in any one of Claims 28-54 and a first support member for supporting the radiation lamp, the first support member comprising a second electrical connection base for engagement with the first electrical connection base and connection to a power supply.

68. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base have a substantially complementary shape.

69. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base are reversibly engageable.

70. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a direction transverse to the longitudinal axis of the radiation lamp.

71. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a non-rotational direction transverse to the longitudinal axis of the radiation lamp.

72. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an acutely angled direction with respect to the longitudinal axis of the radiation lamp.

73. The radiation source module defined in Claim 67, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an orthogonal direction with respect to the longitudinal axis of the radiation lamp.

74. The radiation source module defined in any one of Claims 67-73, comprising a plurality of said radiation lamps.

75. The radiation source module defined in any one of Claims 67-74, further comprising a second support member for supporting a second end of the radiation lamp.

76. The radiation source module defined in Claim 75, further comprising a third support member interconnecting the first support member and the second support member.

77. A radiation source module comprising the radiation source assembly defined in any one of Claims 59-66 and a first support member for supporting a first end of the radiation transparent protective sleeve.

78. A radiation source module comprising the radiation lamp defined in any one of Claims 28-58, a radiation transparent protective sleeve surrounding the elongate

radiation-emitting cavity, a first support member for supporting a first end of the protective sleeve and a second electrical connection base for engagement with the first electrical connection base and connection to a power supply.

79. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base have a substantially complementary shape.

80. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base are reversibly engageable.

81. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a direction transverse to the longitudinal axis of the radiation lamp.

82. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in a non-rotational direction transverse to the longitudinal axis of the radiation lamp.

83. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an acutely angled direction with respect to the longitudinal axis of the radiation lamp.

84. The radiation source module defined in Claim 78, wherein the first electrical connection base and the second electrical connection base are reversibly disengageable in an orthogonal direction with respect to the longitudinal axis of the radiation lamp.

85. The radiation source module defined in any one of Claims 78-84, comprising a plurality of pairs of radiation lamps and radiation transparent protective sleeves.

86. The radiation source module defined in any one of Claims 78-85, further comprising a second support member for supporting a second end of the radiation transparent protective sleeve.

87. The radiation source module defined in Claim 86, further comprising a third support member interconnecting the first support member and the second support member.

88. A fluid treatment system comprising the lamp device defined in any one of Claims 1-27.

89. A fluid treatment system comprising the radiation lamp defined in any one of Claims 28-57.

90. A fluid treatment system comprising the radiation source assembly defined in any one of Claims 58-66.


91. A fluid treatment system comprising the radiation source module defined in any one of Claims 67-89.

92. A water disinfection system comprising the lamp device defined in any one of Claims 1-27.

93. A water disinfection system comprising the radiation lamp defined in any one of Claims 28-57.

94. A water disinfection system comprising the radiation source assembly defined in any one of Claims 58-66.

95. A water disinfection system comprising the radiation source module defined in any one of Claims 67-89.

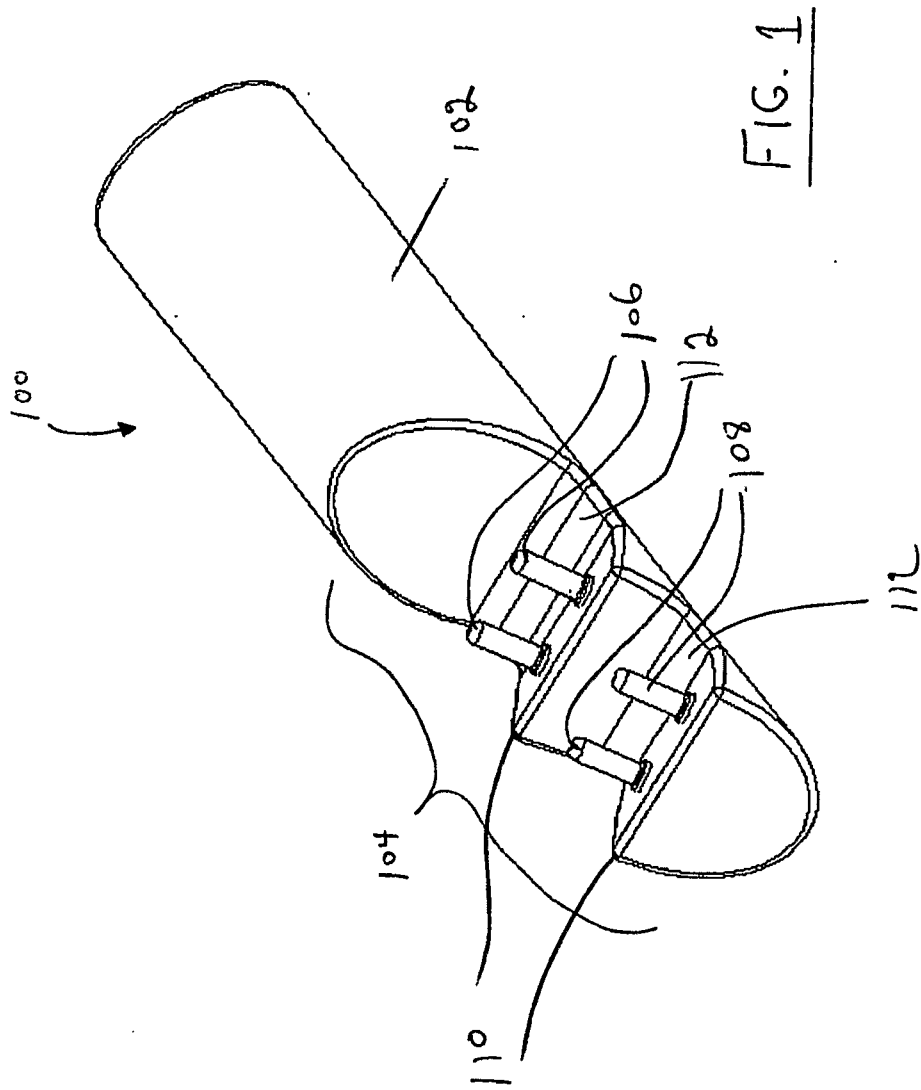


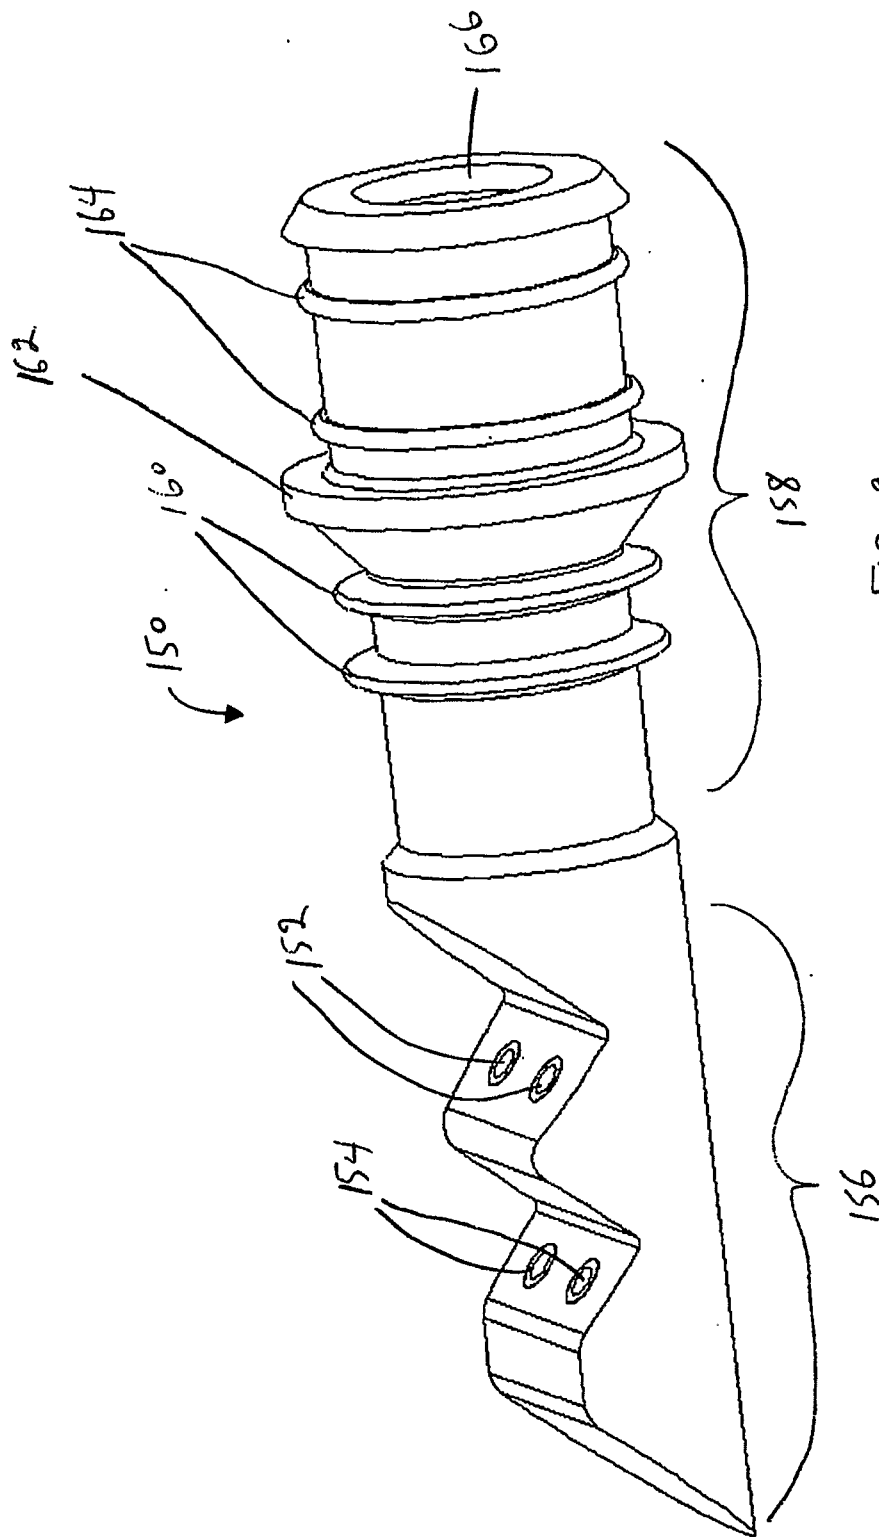


FIG. 2



Copy provided by USPTO from the IFW Image Database on 02/21/2006



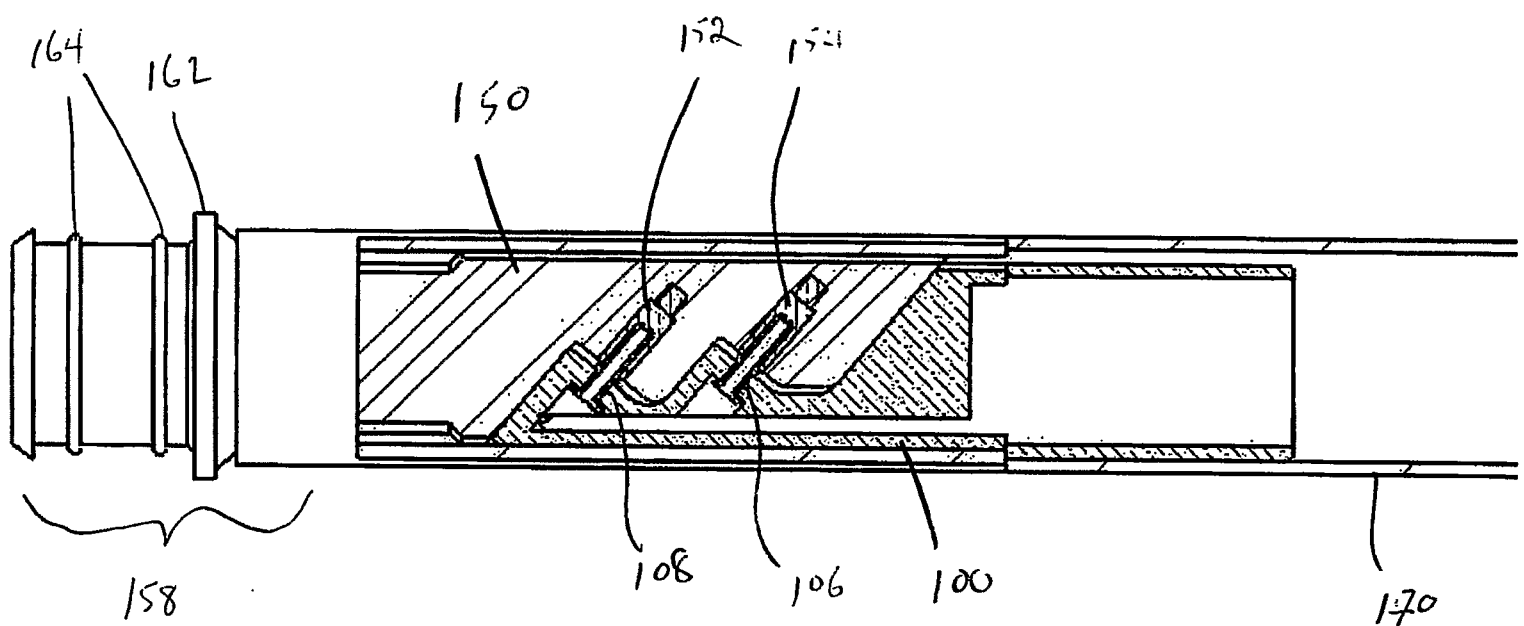


FIG. 4

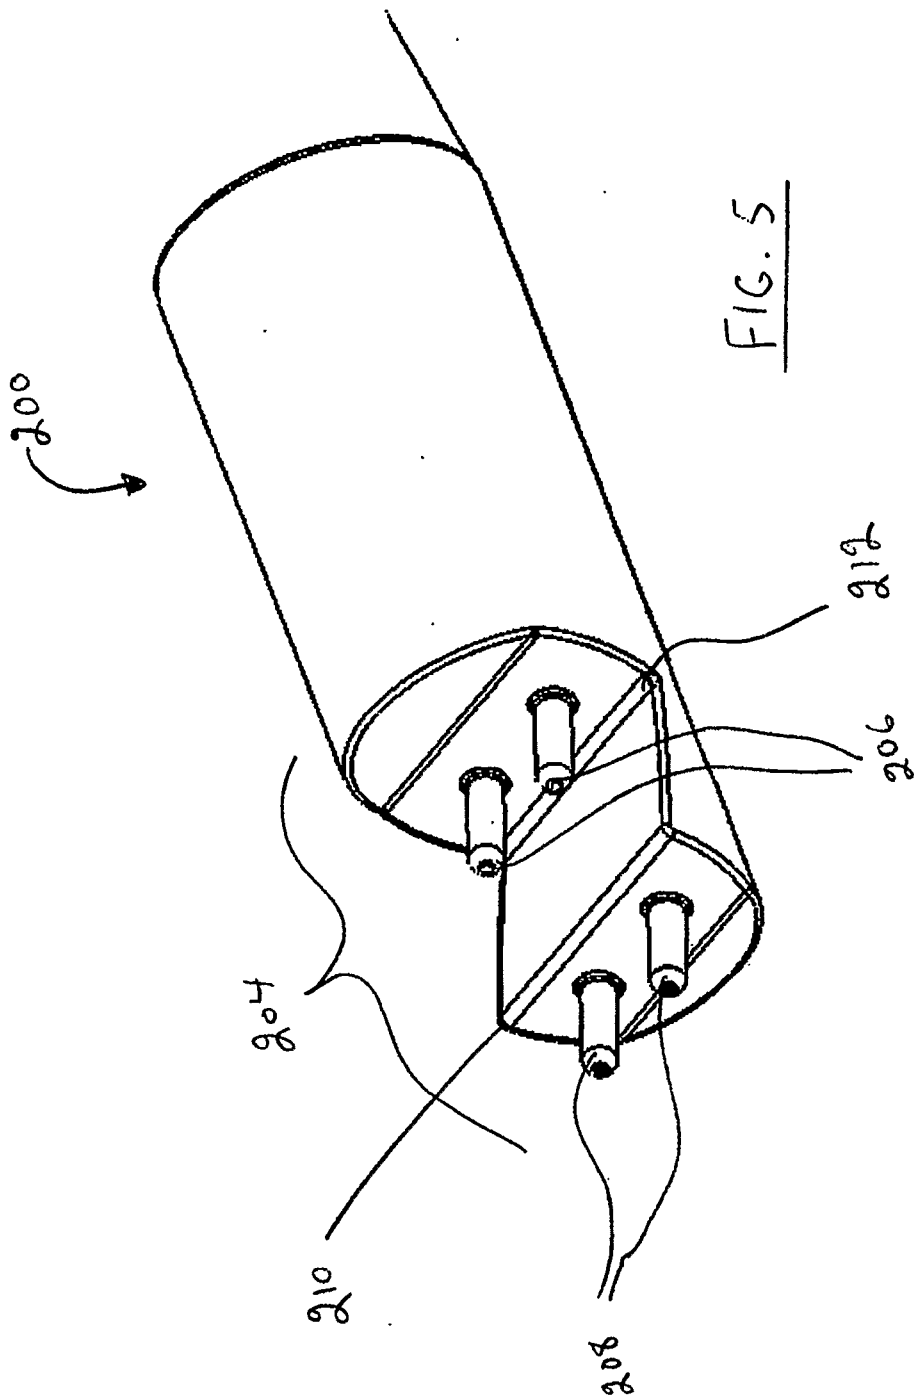

BEST AVAILABLE COPY




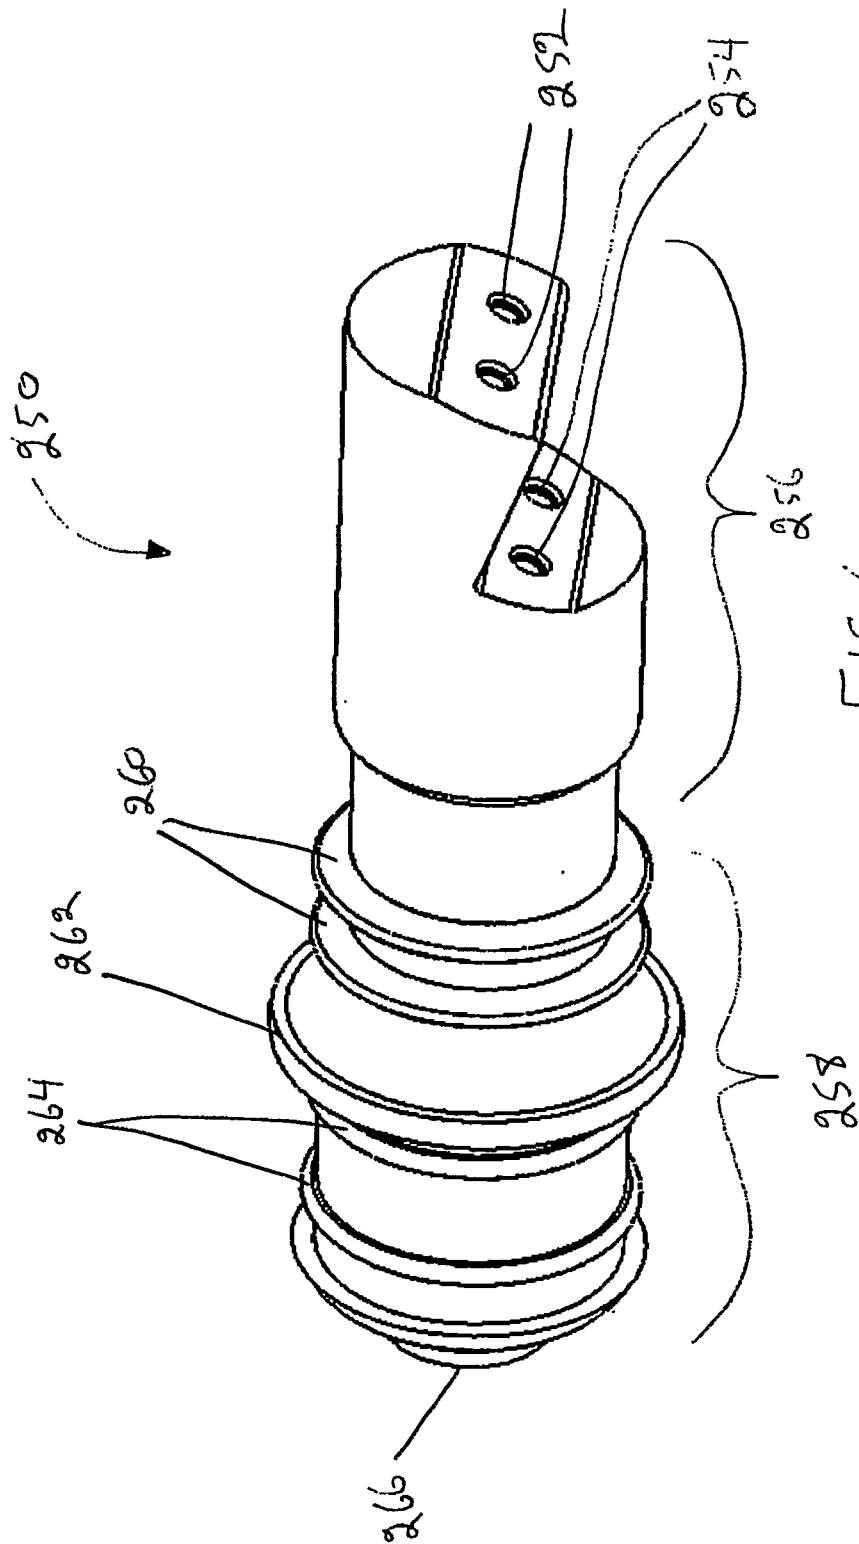


FIG. 6

BEST AVAILABLE COPY



BEST AVAILABLE COPY

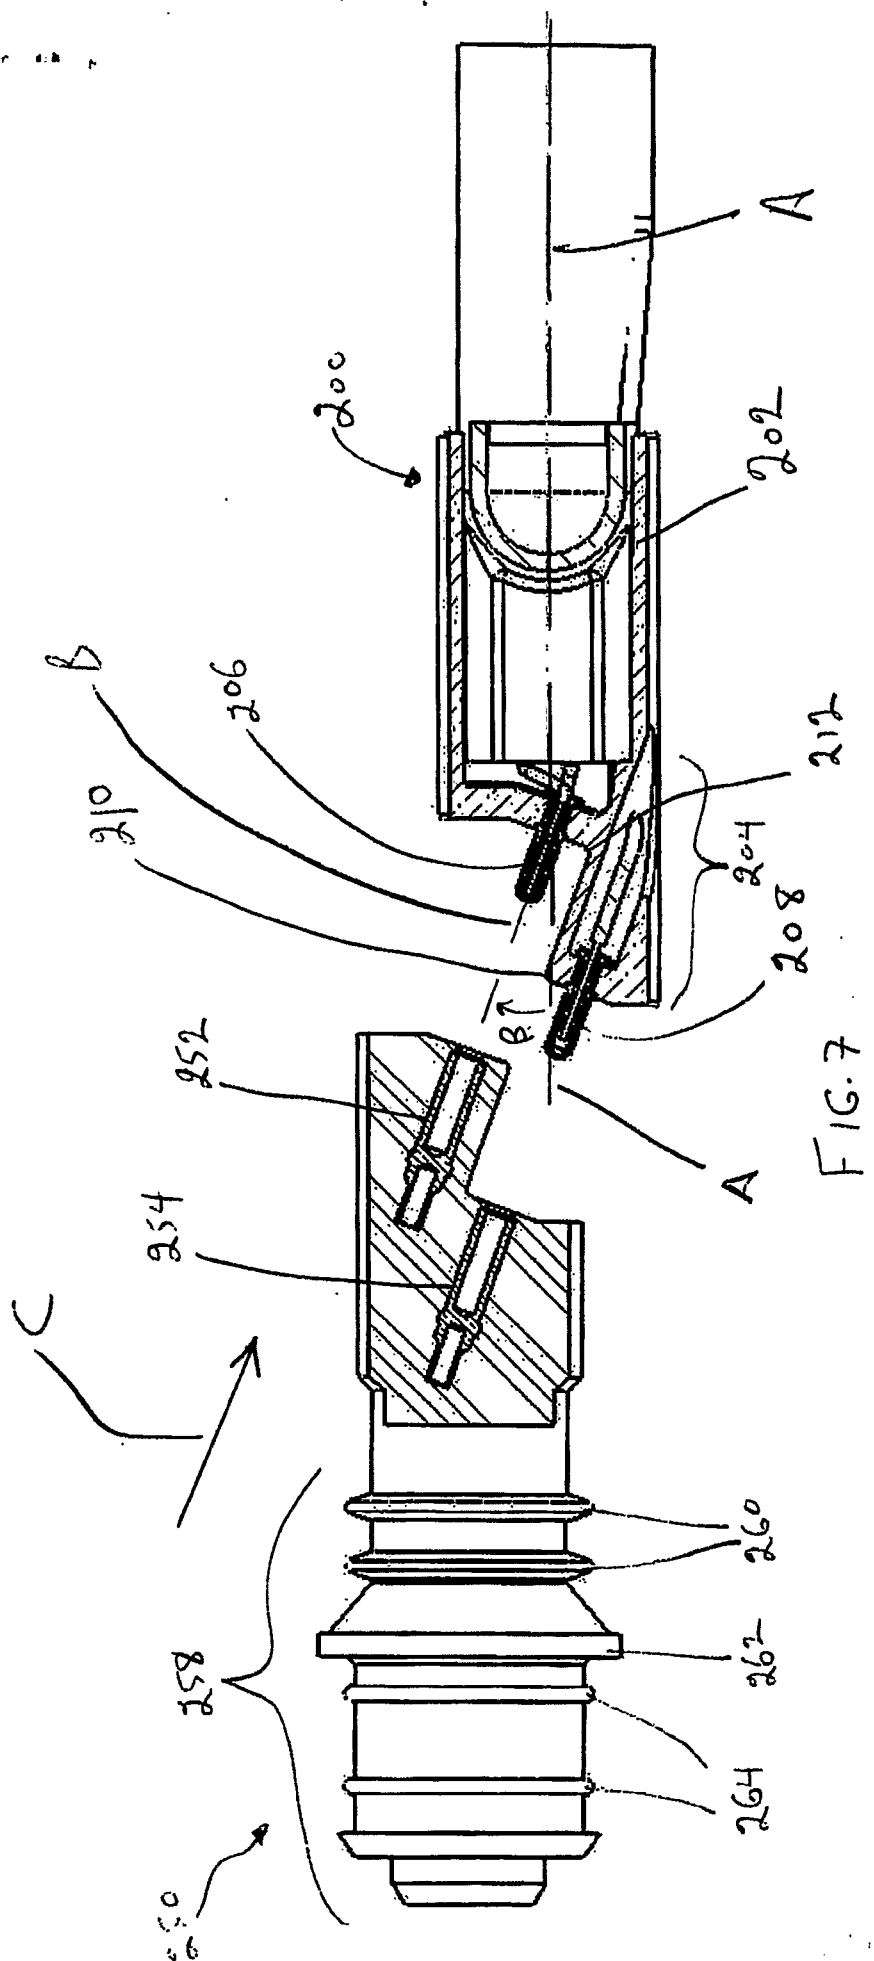