



US005999475A

United States Patent [19]
Futatsuya et al.

[11] **Patent Number:** **5,999,475**
[45] **Date of Patent:** **Dec. 7, 1999**

- [54] **INTERNAL POTENTIAL GENERATION CIRCUIT THAT CAN OUTPUT A PLURALITY OF POTENTIALS, SUPPRESSING INCREASE IN CIRCUIT AREA**
- [75] Inventors: **Tomoshi Futatsuya; Atsushi Ohba,**
both of Hyogo, Japan
- [73] Assignee: **Mitsubishi Denki Kabushiki Kaisha,**
Tokyo, Japan
- [21] Appl. No.: **09/034,996**
- [22] Filed: **Mar. 5, 1998**
- [30] **Foreign Application Priority Data**
Aug. 27, 1997 [JP] Japan 9-231241
- [51] **Int. Cl.⁶** **G11C 7/00**
- [52] **U.S. Cl.** **365/226; 365/185.23; 365/189.09; 365/189.11**
- [58] **Field of Search** **365/226, 185.23, 365/189.09, 189.11; 327/536**

- [56] **References Cited**
U.S. PATENT DOCUMENTS
5,343,434 8/1994 Noguchi 365/185.23
5,428,568 6/1995 Kobayashi et al. 365/185.23

5,499,209	3/1996	Oowaki et al.	365/226
5,617,369	4/1997	Tomishima et al.	365/230.06
5,801,987	9/1998	Dinh 365/185.23	
5,818,289	10/1998	Chevallier et al.	327/536
5,828,596	10/1998	Takata et al.	365/226
5,892,267	4/1999	Takada 327/536	
5,909,141	6/1999	Tomishima 327/536	

FOREIGN PATENT DOCUMENTS


4-182995	6/1992	Japan .
5-182481	7/1993	Japan .

Primary Examiner—David Nelms
Assistant Examiner—Gene N. Auduong
Attorney, Agent, or Firm—McDermott, Will & Emery

[57] **ABSTRACT**

An internal potential generation circuit operates with the potential levels of an output node N_{H1} of a first boosting circuit and an output node N_{H2} of a second boosting circuit maintained in common in response to a high voltage switch circuit attaining a conductive state at the initial stage of the operation of the internal potential generation circuit. After the output potential level of the second boosting circuit arrives at a predetermined potential level, the high voltage switch circuit is cut off, whereby the first and second boosting circuits drive independently the potential level of corresponding output nodes.

13 Claims, 18 Drawing Sheets

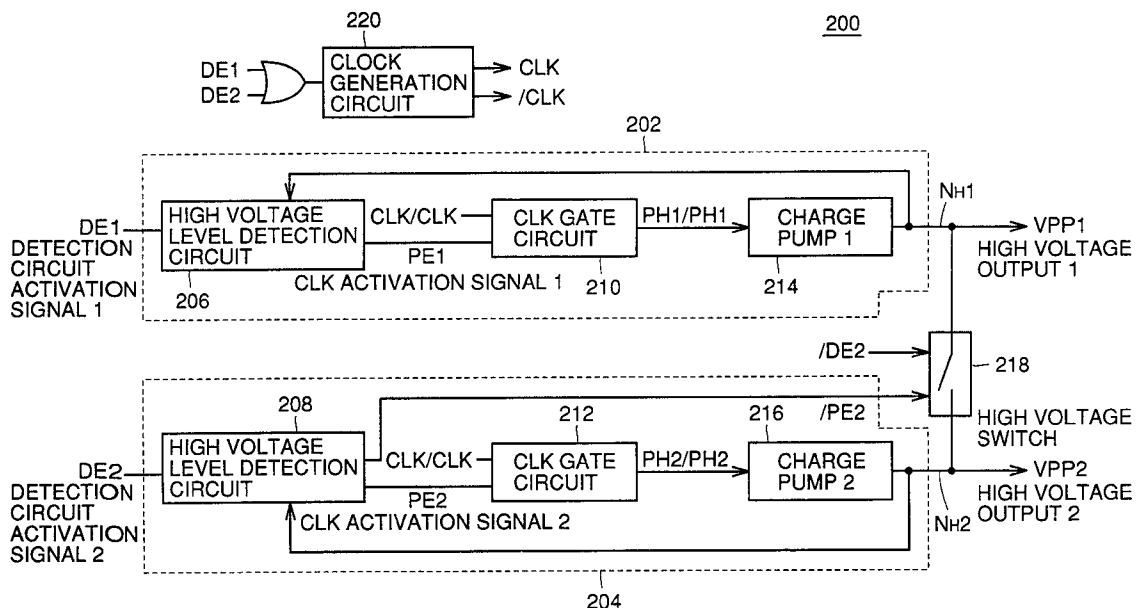

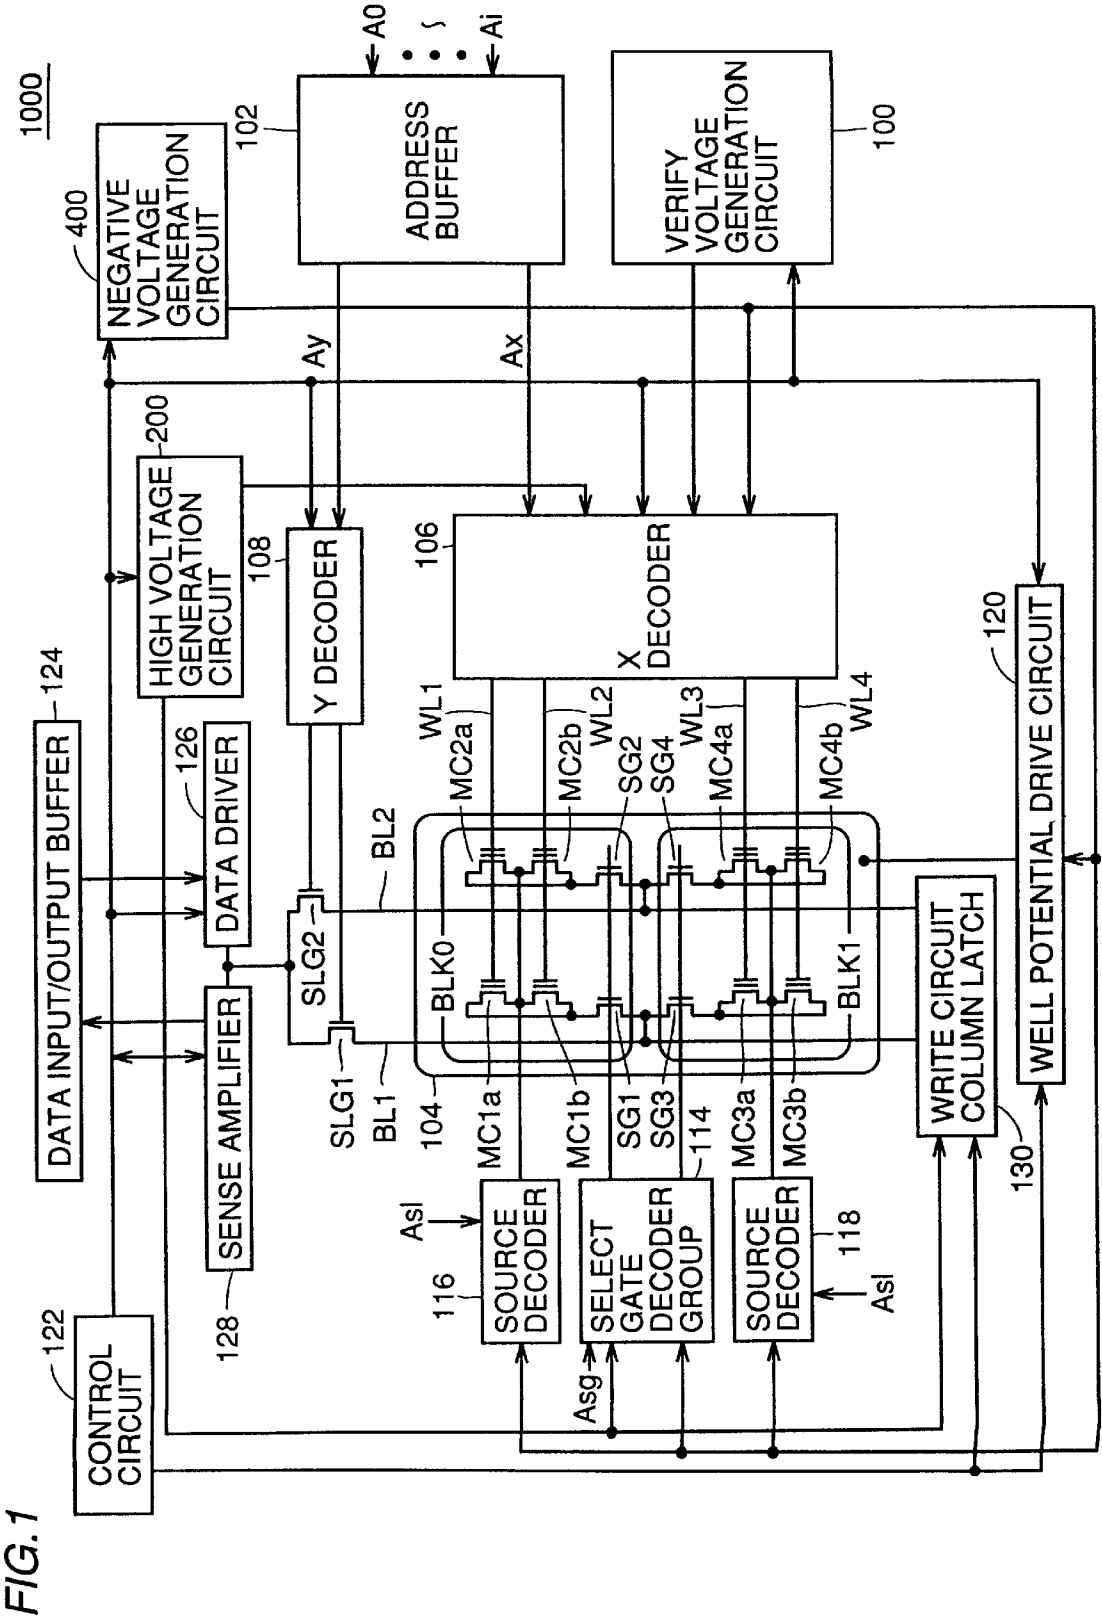


FIG.2

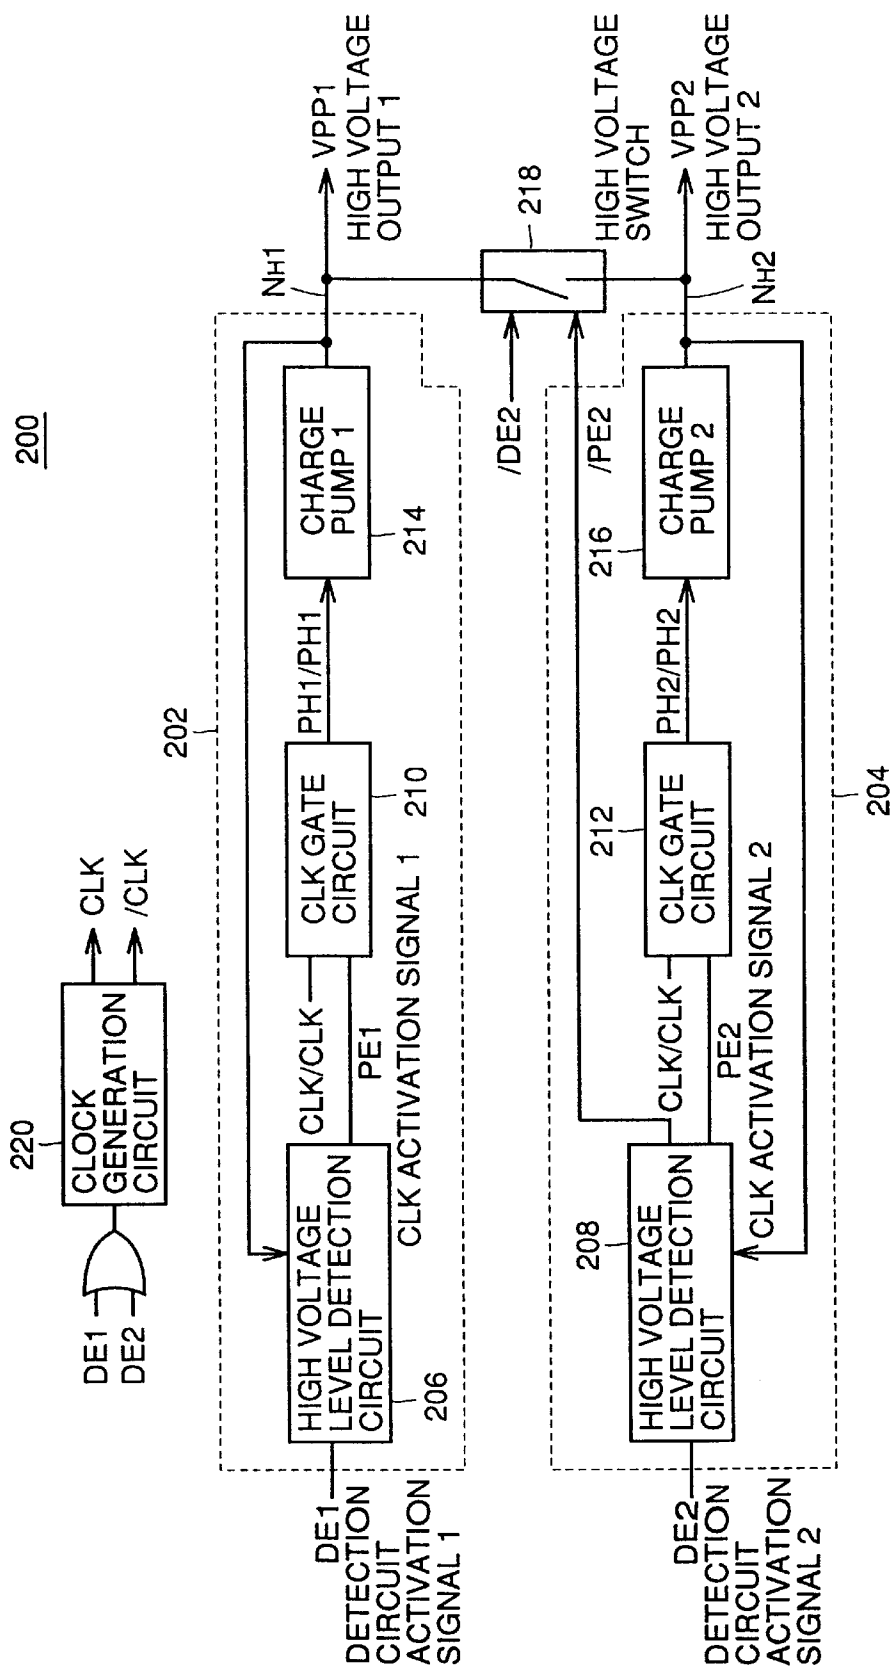


FIG.3

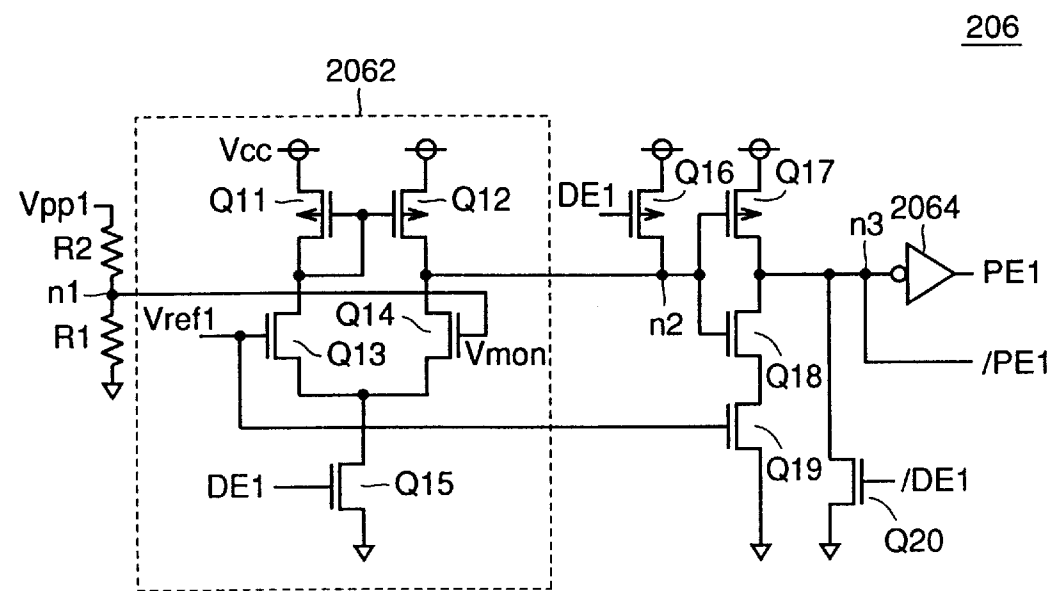


FIG.4

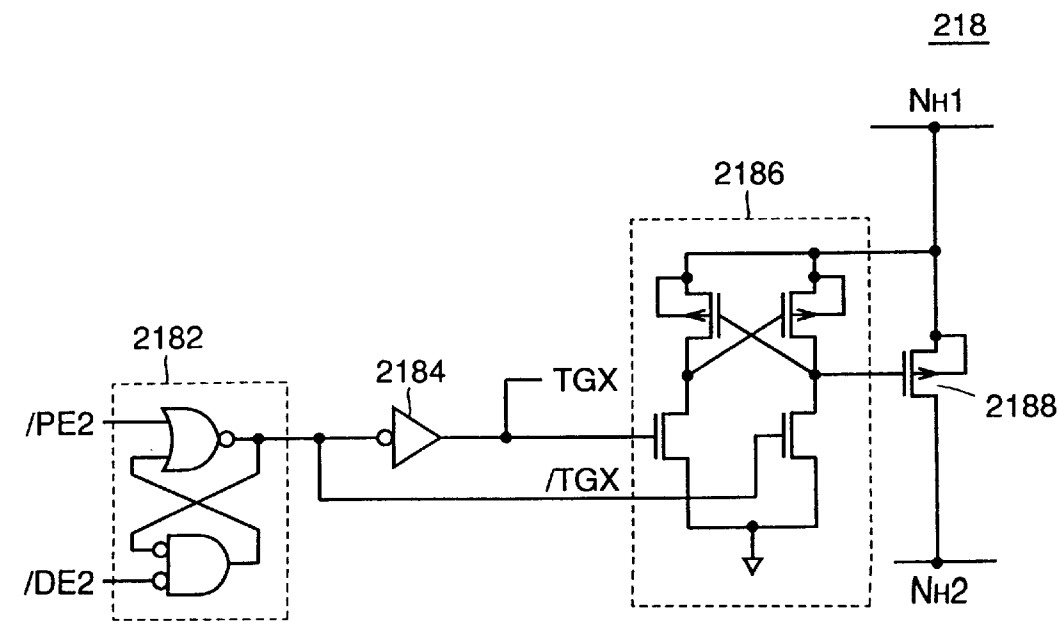


FIG.5

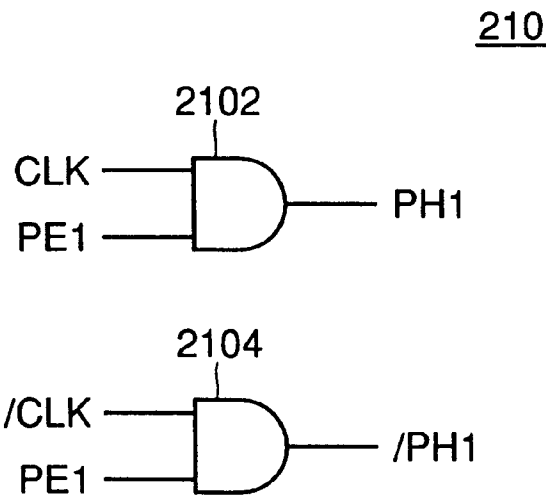


FIG.6

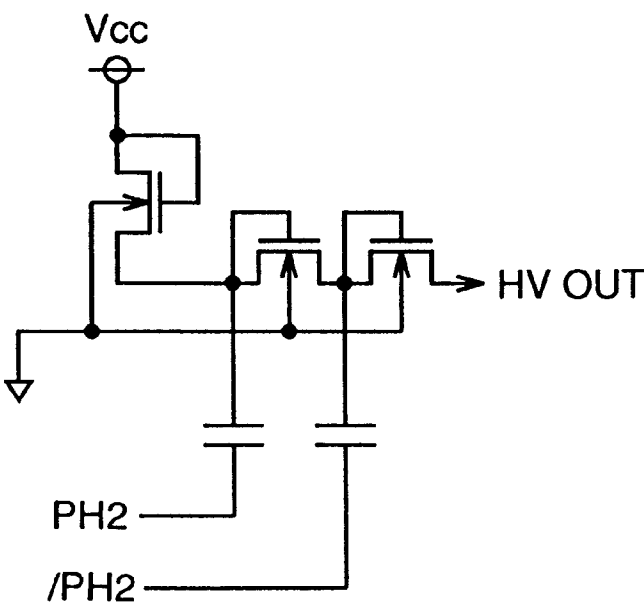


FIG. 7

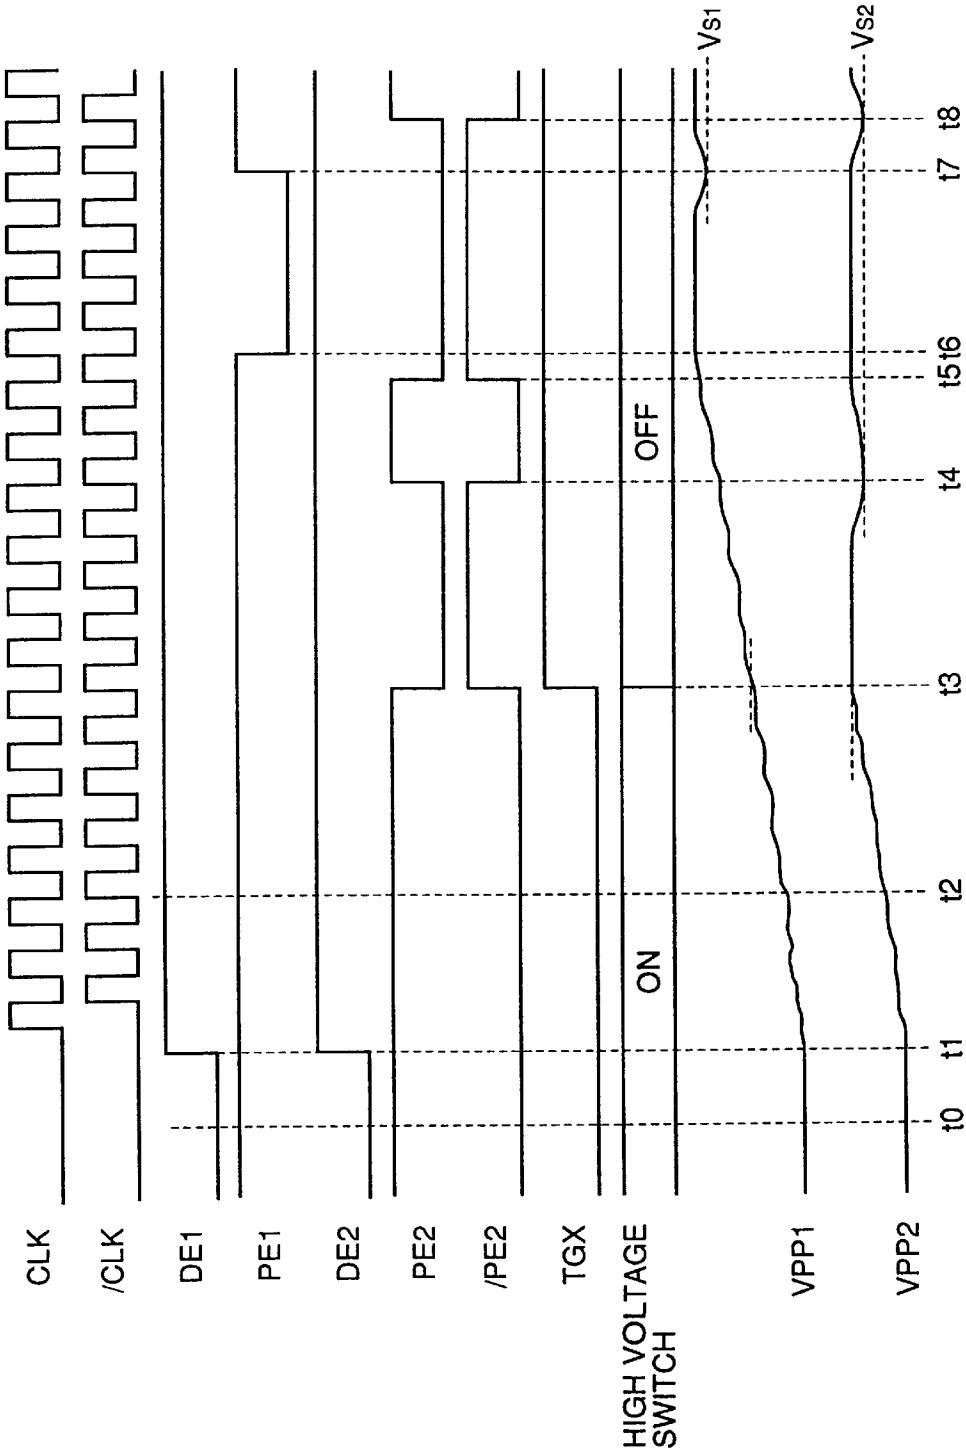


FIG. 8

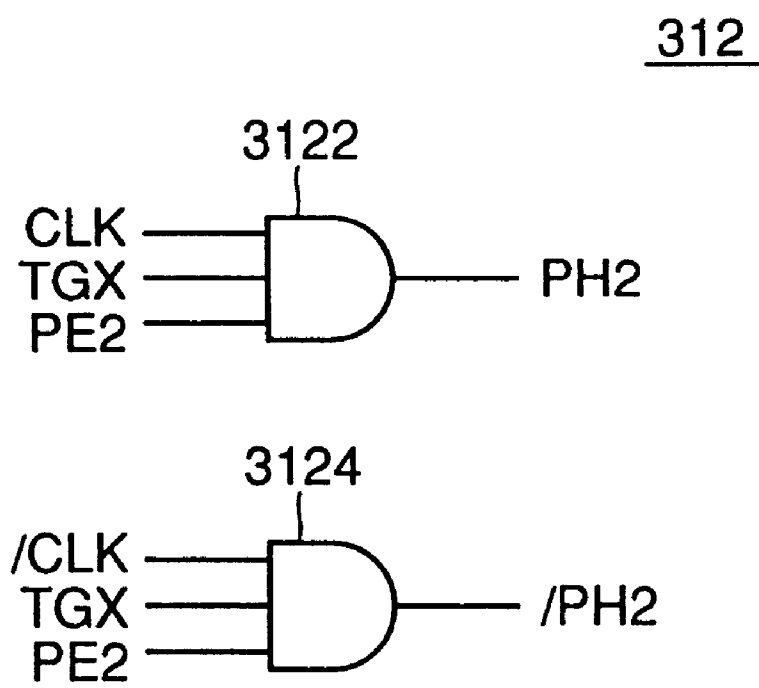


FIG. 9

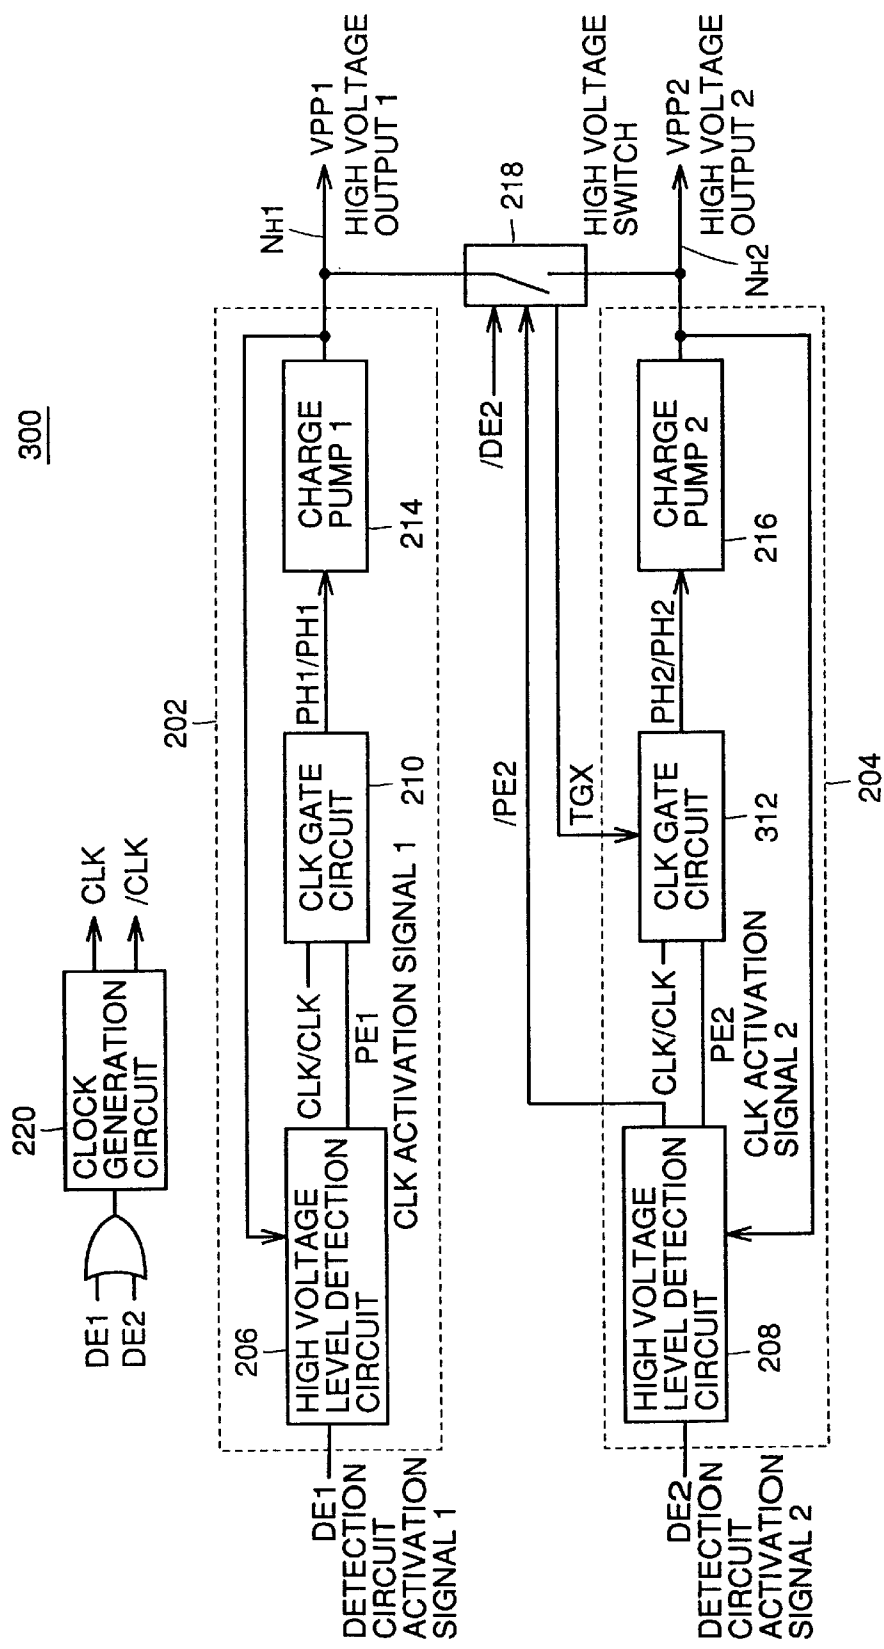


FIG. 10

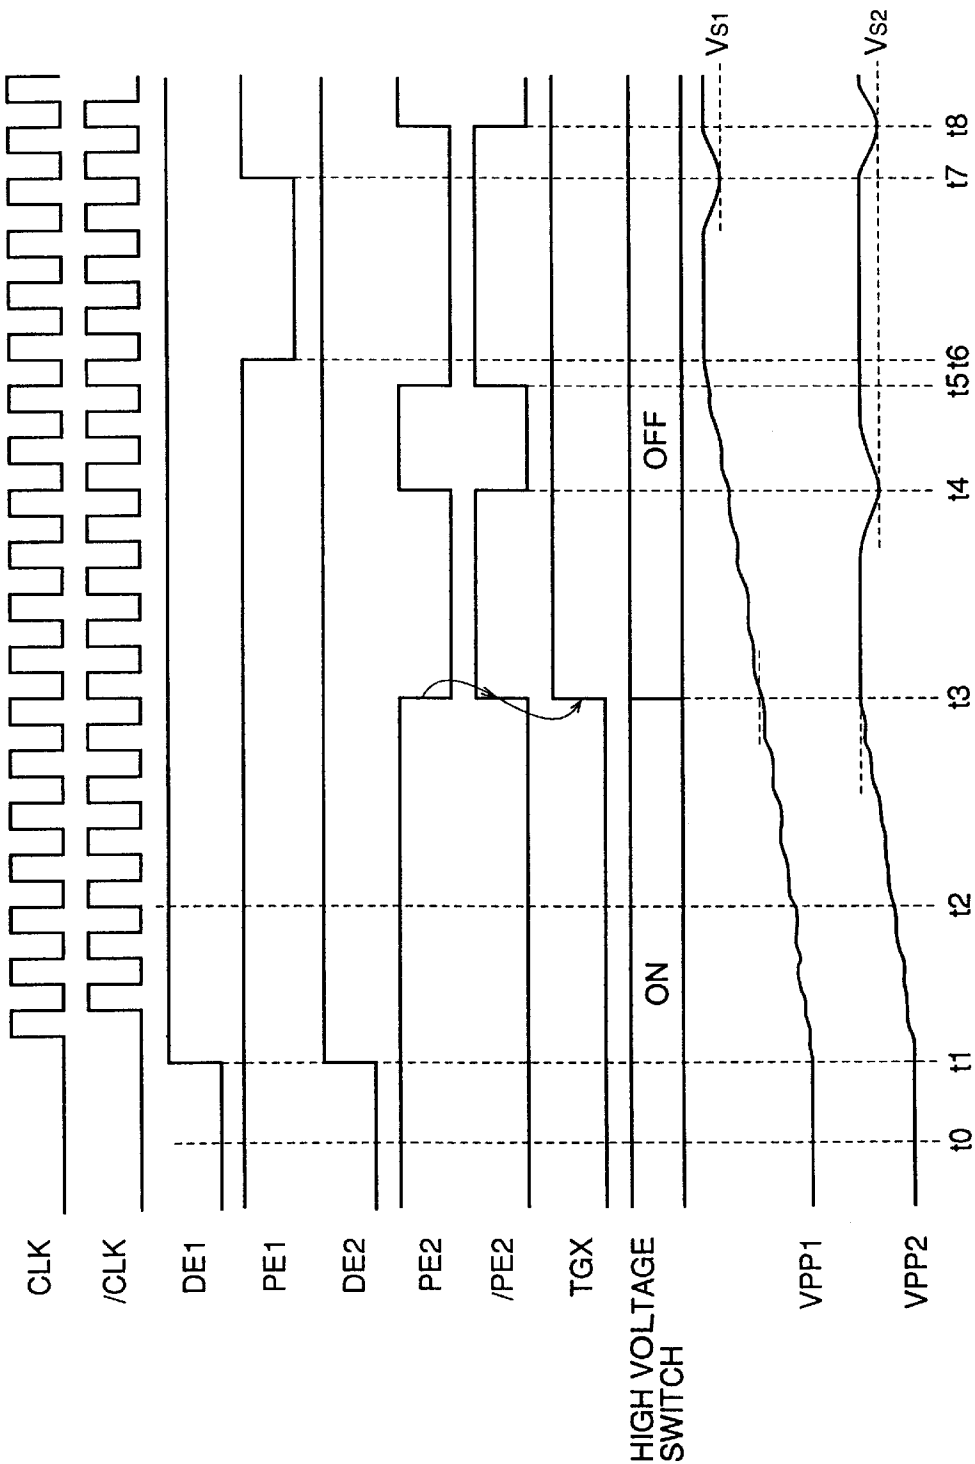


FIG. 11

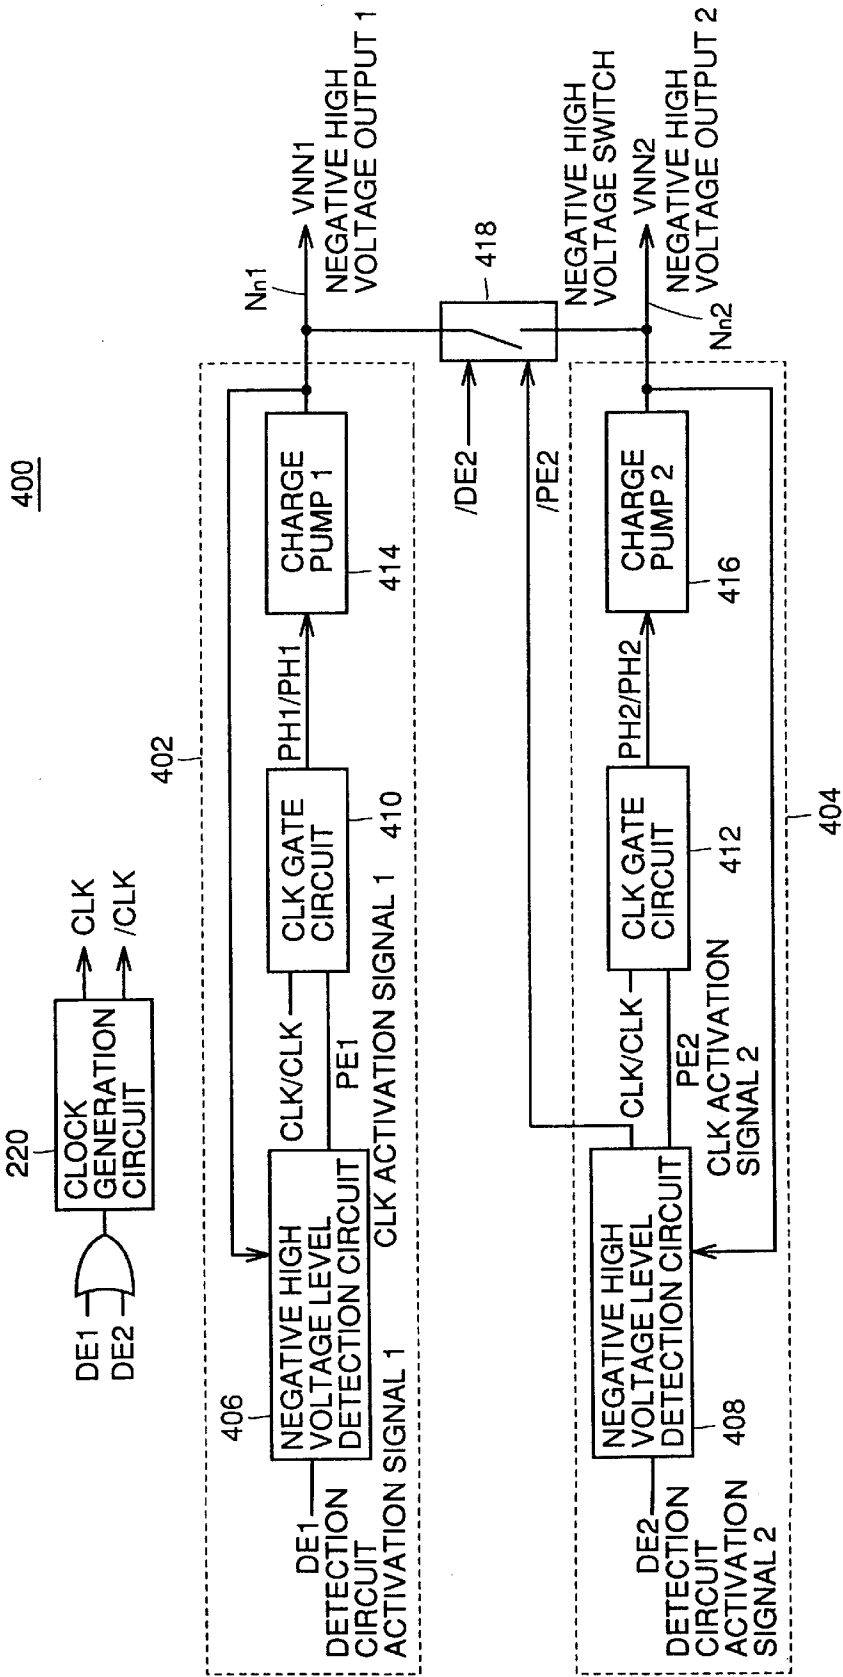


FIG. 14

414

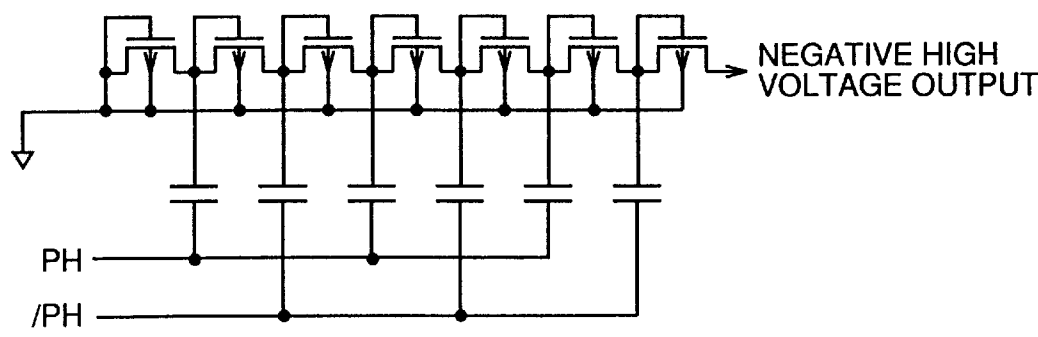


FIG. 15

416

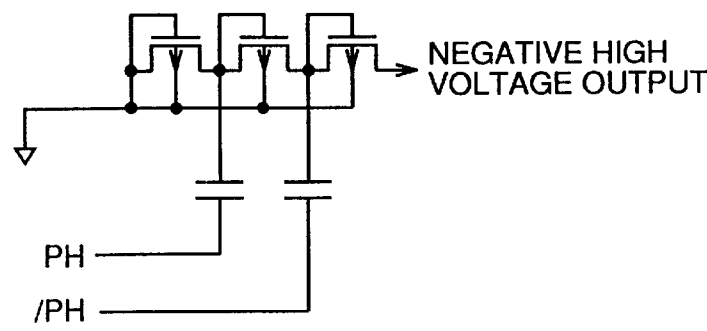


FIG. 16

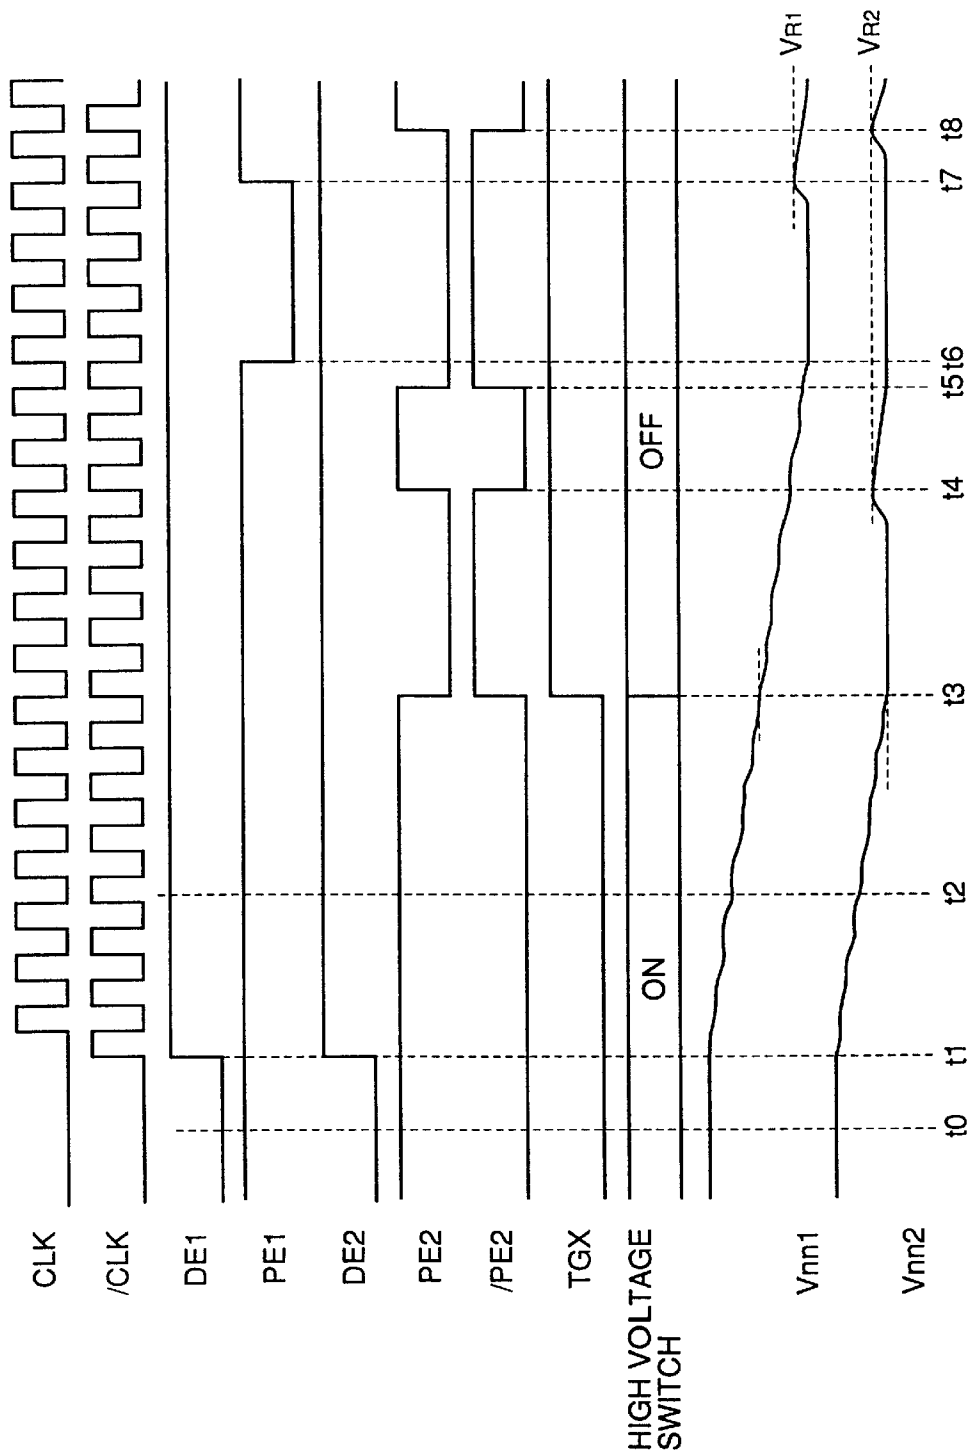


FIG. 17

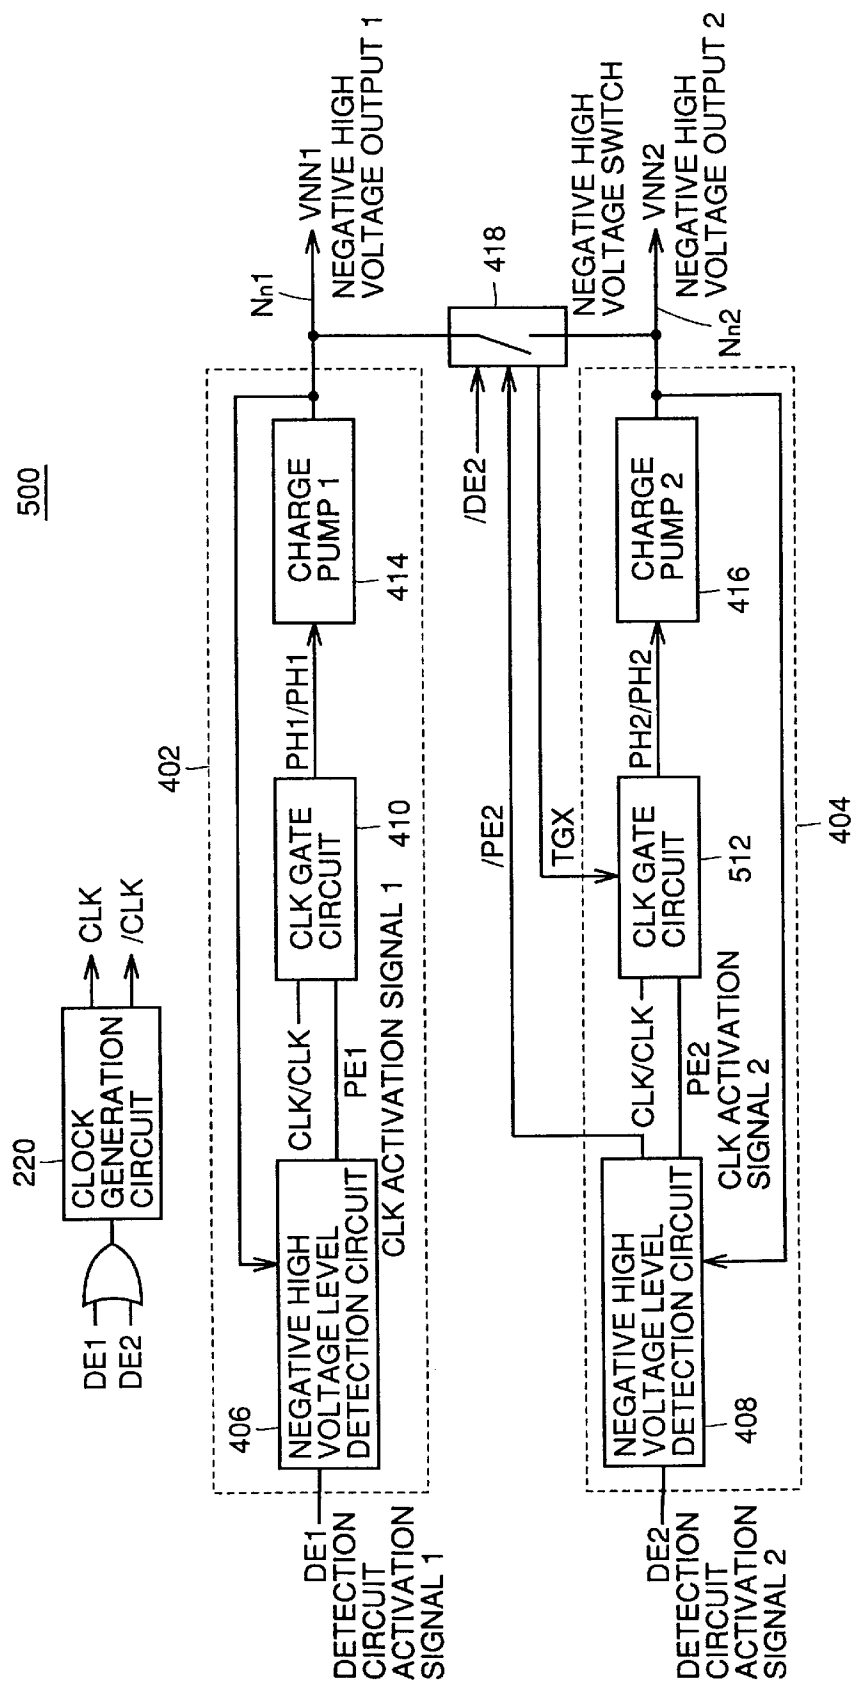


FIG. 18

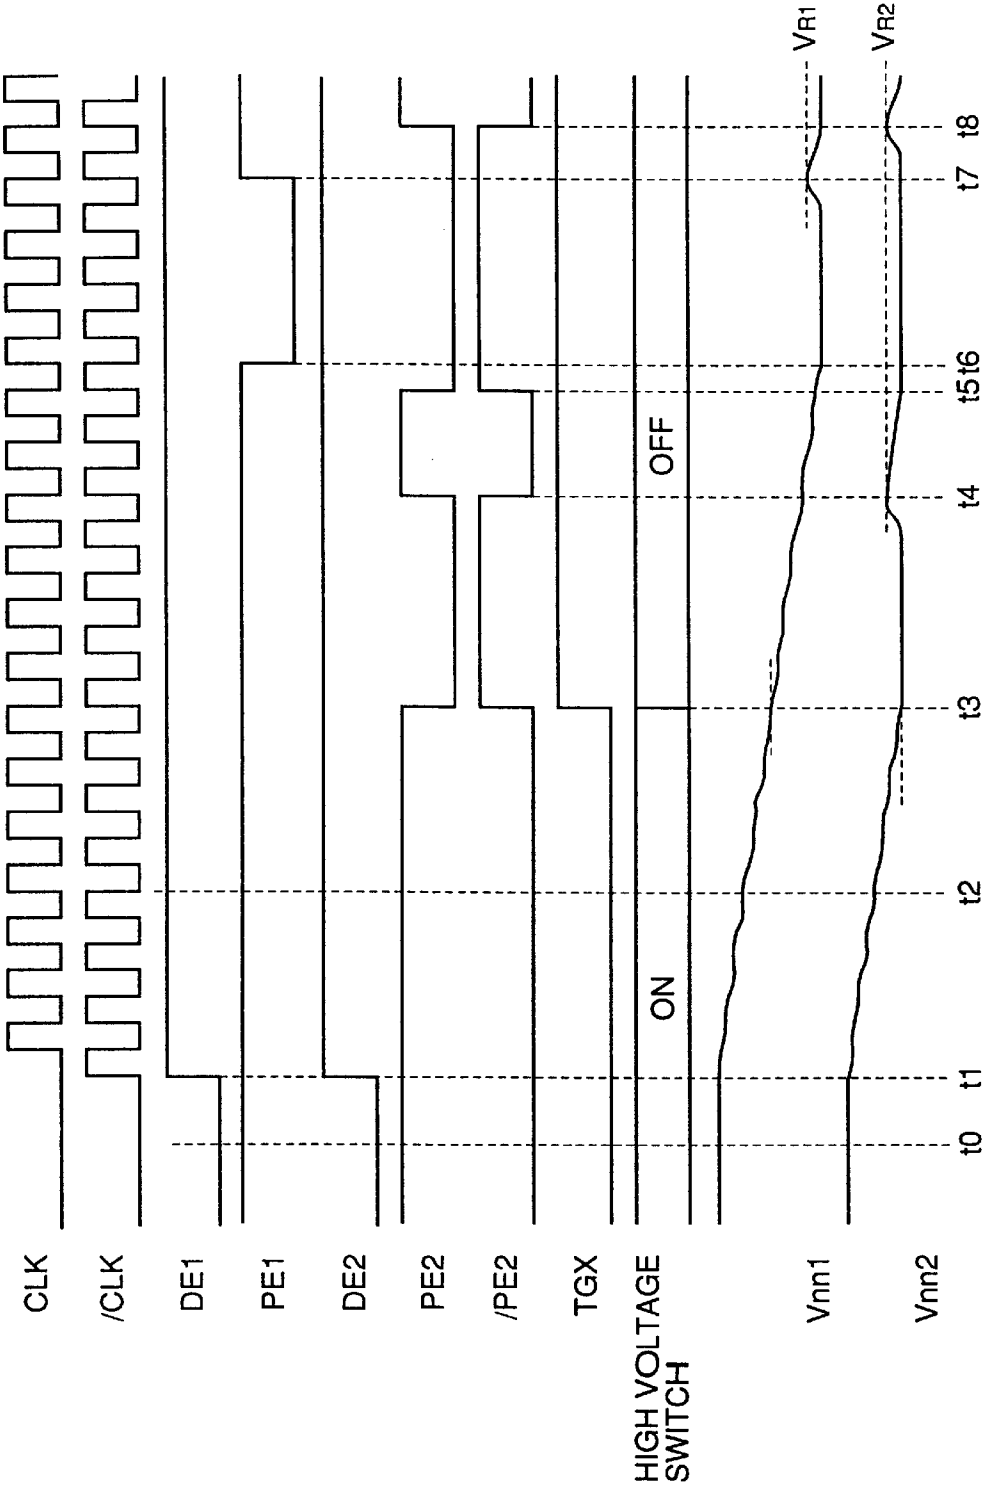


FIG.19 PRIOR ART

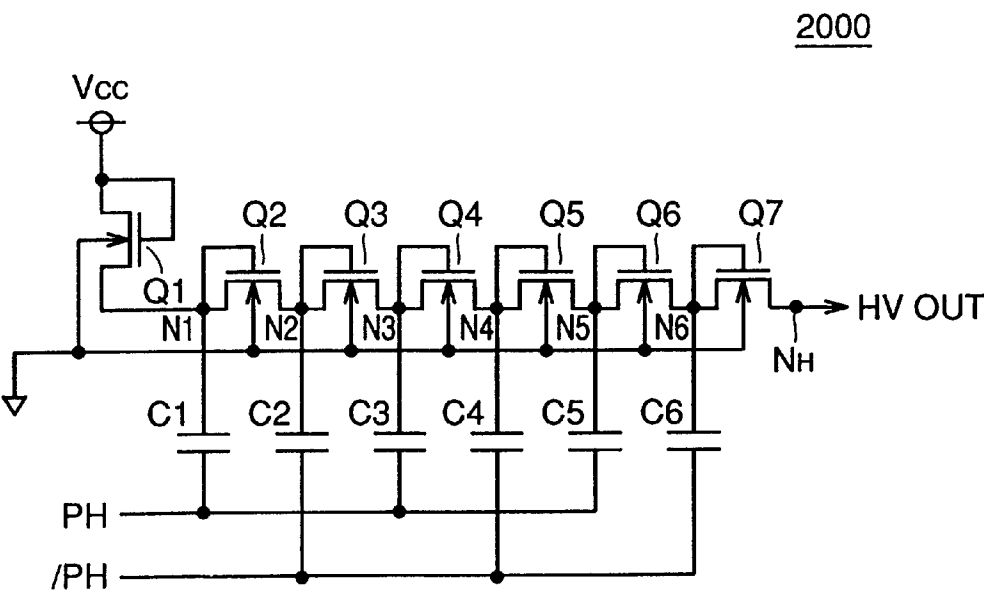


FIG.20 PRIOR ART

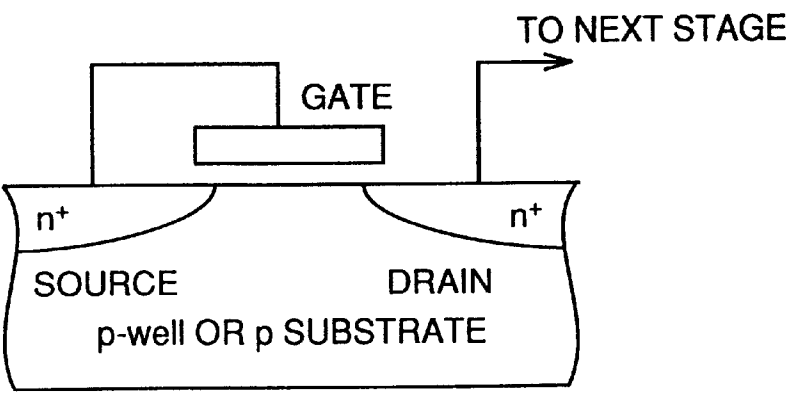


FIG.21 PRIOR ART

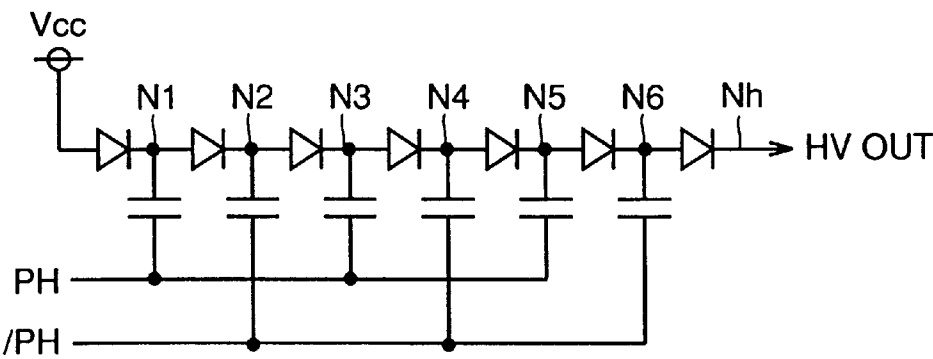


FIG.22 PRIOR ART

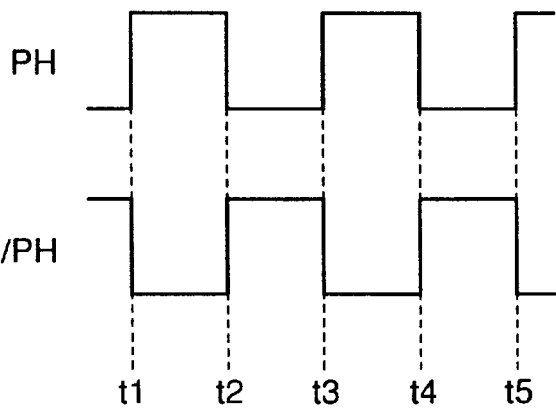


FIG.23A PRIOR ART

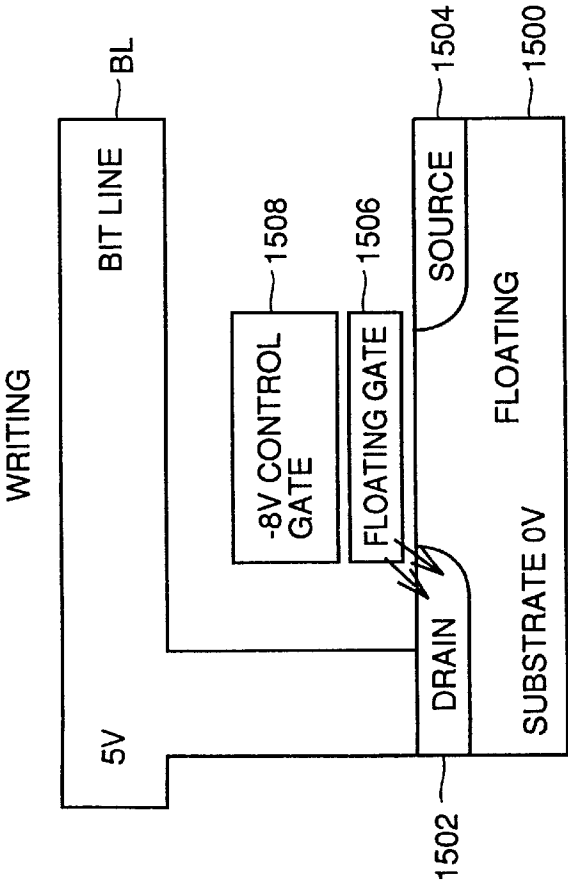


FIG.23B PRIOR ART

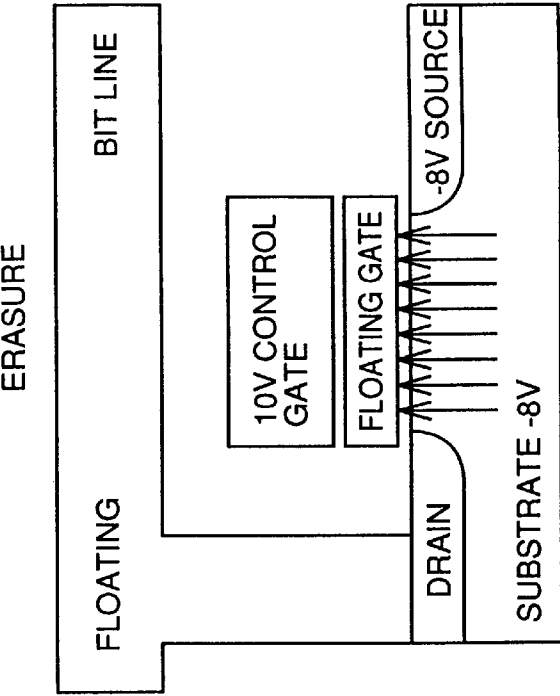


FIG.24 PRIOR ART

	BIT LINE	CONTROL GATE	SOURCE LINE	SUBSTRATE
WRITING	5V	-8V	FLOATING	0V
ERASURE	FLOATING	10V	-8V	-8V
READING	1V	3V	0V	0V

INTERNAL POTENTIAL GENERATION CIRCUIT THAT CAN OUTPUT A PLURALITY OF POTENTIALS, SUPPRESSING INCREASE IN CIRCUIT AREA

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an internal potential generation circuit mounted in a semiconductor integrated circuit device, and receiving an external power supply potential for generating an internal potential. More particularly, the present invention relates to an internal potential generation circuit that receives an external power supply potential for generating an internal potential required for writing and erasing data with respect to a nonvolatile memory device in a nonvolatile semiconductor memory device and the like.

2. Description of the Background Art

In a semiconductor integrated circuit device, particularly, in a non-volatile semiconductor memory device such as a flash memory, data is written through a tunnel current and the like to a memory cell transistor having a floating gate. It is therefore necessary to generate a voltage higher than the external power supply voltage (for example $V_{cc}=3.3V$) on the chip.

When a structure is implemented in which a sense amplifier is commonly shared by left and right bit line pairs such as in a dynamic semiconductor memory device (referred to as DRAM hereinafter) as well as in a nonvolatile semiconductor memory device, a boosted potential of a sufficient high level must be applied to the gate of the transistor for bit line isolation that opens/closes the connection between the sense amplifier and the left and right bit line pairs. If a boosted voltage is not applied, the potential level of the H level (logical high) data written into a memory cell will be reduced by the threshold voltage of the bit line isolation transistor even when the bit line isolation transistor is rendered conductive in a data writing operation to a memory cell or a data rewriting operation in a refresh operation mode.

For example, in a data output circuit, a great current flows to the output transistor. Therefore, an N channel MOS transistor is used to avoid CMOS latch up. In this case, reduction in the charging rate with respect to the load caused by a lower potential corresponding to the threshold voltage of the output transistor must be avoided. It is therefore necessary to drive the gate of the N channel MOS output transistor with a boosted potential.

In a nonvolatile semiconductor memory device such as a flash memory, a negative potential must be applied to the control gate, the source line, and the substrate according to the operation mode in a write operation and an erasure operation, as will be described afterwards.

In general, a negative potential is applied to the substrate side in order to improve the latch up resistance of the CMOS circuit and to suppress threshold value variation of the MOS transistor in a DRAM.

In this case, a negative potential must be generated from an externally applied single power supply potential (for example $V_{cc}=3.3V$).

In the above-described cases where an internal potential higher than the external power supply potential or a negative internal potential is to be generated, a charge pump circuit is generally employed.

FIG. 19 is a circuit diagram showing main components of a charge pump circuit 2000 for generating a positive internal high potential.

Charge pump circuit 2000 includes N channel MOS transistors Q1–Q7 connected in series between an output node N_H from which a positive internal high potential is output and a power supply potential V_{cc} , each transistor being diode-connected, and capacitors C1–C6 having respective ends connected to the gates of transistors Q2–Q7. A clock signal PH is applied to the other ends of capacitors C1, C3 and C5. A clock signal /PH complementary (non-overlapping) to clock signal PH is applied to the other ends of capacitors C2, C4 and C6.

FIG. 20 is a schematic diagram showing a cross section of transistors Q1–Q7 of FIG. 19. A structure equal to a diode with the forward direction from the source to the drain is implemented since the gate electrode and the source are connected.

FIG. 21 shows an equivalent circuit of FIG. 19.

FIG. 22 is a timing chart showing the transition of clock signals PH and /PH over time.

The operation of charge pump circuit 2000 will be described briefly hereinafter with reference to FIGS. 21 and 22.

The potential of the node connected to signals PH and /PH via the capacitor varies in synchronization with these signals.

At time t_1 in FIG. 22 when signal PH attains an H level (V_{cc} level) and signal /PH attains an L level (GND level), the potentials of nodes N1, N3 and N5 have to rise, and the potentials of nodes N2, N4 and N6 have to become lower in response to signals /PH.

However, there is a diode connected respectively between nodes N1 and N2, between nodes N3 and N4, and between nodes N5 and N6. Therefore, a forward current flows from node N1 to node N2 via diode Q2. Similarly, a forward current flows from node N3 to node N4 via diode Q4. Also, a forward current flows from node N5 to node N6 via diode Q6. The potentials of nodes N2, N4 and N6 do not exhibit a great reduction during the period of time t_1 – t_2 .

At time t_2 , signal PH is driven to an L level, and signal /PH is driven to an H level. Likewise the case of time t_1 – t_2 , the potential reduction of node N1 does not correspond to the reduction of signal PH due to the current flowing from power supply potential V_{cc} via diode Q1. Similarly, the potential reduction of nodes N3 and N5 is not so great as the reduction of signal PH due to the current flowing from nodes N2 and N4 via diodes Q3 and Q4, respectively.

By repeating the above operation, a potential of a level sufficiently higher than the level of internal power supply V_{cc} is output to output node N_H .

The diode of charge pump circuit 2000 of FIG. 19 is formed by the connection of the source and gate of a MOS transistor. Here, the potential difference of boosting is represented by the following equation.

$$(\text{Amplitude of signal applied as a pulse-threshold value of MOS transistor}) \times \text{number of stages} \quad (1)$$

In a steady state, the supply current I_{OUT} provided from charge pump circuit 2000 is represented by the following equation.

$$I_{OUT} = f \times (C + C_s) \times V_i \quad (2)$$

where f is the frequency of the clock signal supplied to the charge pump, C is the sum of the capacitance of coupling

capacitors C1–C6, C_s is the parasitic capacitance, and V_L is the voltage amplitude when the coupling capacitor is charged/discharged.

It is appreciated from equation (2) that a greater output current is provided in proportion to a larger sum C of the capacitance of coupling capacitors C1–C6.

In a transition state, the load capacitor can be charged more speedily with a greater output current.

The operation of a nonvolatile semiconductor memory device, for example a flash memory, that operates employing the above internal potential generation circuit will be described hereinafter.

FIGS. 23A and 23B are schematic sectional views of a floating gate type transistor forming the memory cell of a conventional nonvolatile semiconductor memory device. The former shows the case of a writing operation, and the latter shows the case of an erasure operation.

Referring to FIGS. 23A and 23B, a memory cell transistor includes an n type drain region 1502 and an n type source region 1504 formed at the surface of a p type semiconductor substrate 1500, a floating gate 1506 formed on a channel region between drain region 1502 and source region 1504 with a thin tunnel oxide film (for example, film thickness=10 nm) thereunder, and a control gate 1508 layered on floating gate 1506 with an insulation film thereunder.

A bit line BL is connected to drain region 1502. A predetermined potential is selectively applied to source region 1504 via a source line SL (not shown). Source region 1504 alternatively attains a floating state.

The conductance across the source and drain corresponds to the potential applied to the control gate. The channel conductance increases as the potential applied to the control gate becomes higher. More specifically, when the potential of the control gate is increased while a predetermined voltage is applied across the drain and source, the current I_{ds} flowing across the source and drain will also increase.

The level of the control gate potential at which a current I_{ds} begins to flow across the source and drain by increase of the potential of the control gate is called the cell threshold value.

This cell threshold value increases as electrons are accumulated at floating gate 1506 initially attaining an electrically neutral state.

In other words, current will not flow across the source and drain unless a higher voltage is applied to the control gate in proportion to a greater amount of electrons accumulated at floating gate 1506.

Since a floating gate is electrically cut off by an insulation film, information is stored in a nonvolatile manner by the accumulated electrons. The data written in a memory cell can be identified depending upon whether a current flows across the source and drain when a predetermined potential difference, for example each 1V is applied across the source and drain and a constant potential, for example 3V, is applied to control gate 1508.

FIG. 24 shows examples of potentials applied to bit line BL, control gate 1508, source line SL and substrate 1500 for respective cases of writing data into the above-described memory cell, erasing data, and reading out data.

Write Operation

The write operation will be described briefly hereinafter with reference to FIG. 23A and FIG. 24.

Data is written into a memory cell by drawing out the accumulated electrons from floating gate 1506.

The cell threshold value in a write state is set to be at least 0V and not greater than power supply voltage V_{cc} assuming

that power supply voltage V_{cc} is applied to control gate 1508 in data reading.

In general, the potential level of control gate 1508 in a memory cell of a nonselected state and a selected state is held at 0V and power supply potential V_{cc} , respectively. When data is written into a selected memory cell with the cell threshold value set as described above, a source-drain current will flow through the floating gate transistor forming that memory cell.

As an example in data writing, the potential of 5V, -8V and 0V is applied to the bit line, the control gate and the substrate, respectively. Source line SL is set at a floating state.

Under the above potential setting electrons, are drawn out from floating gate 1506 to drain region 1502. In other words, the cell threshold value is reduced.

Erasure Operation

The erasure operation will be described hereinafter with reference to FIG. 23B and FIG. 24.

As an example in an erasure operation, control gate 1508, source line SL, and substrate 1500 are set to the potential of 10V, -8V, and -8V, respectively. Bit line BL is set to a floating state.

In this case, electrons are injected into floating gate 1506 from the substrate 1500 side, i.e., from the channel region towards control gate 1508 that is biased positively.

Electrons will be accumulated in floating gate 1506, whereby the cell threshold value increases.

Readout Operation

When the potentials of bit line BL, control gate 1508, source line SL and substrate 1500 are 1V, 3V, and 0V, respectively, in a readout operation, no current will flow across the source and drain when an erased memory cell is selected.

As described above, the cell threshold value can be altered by introducing or drawing out electrons to or from floating gate 1506. By detecting whether current flows to a selected memory cell in a readout operation, the stored data can be read out.

In the above-described data writing, erasing and reading operation in a flash memory, a high voltage of a plurality of different levels is required. More specifically, a voltage of 5V is applied to a bit line in a writing operation and a voltage of 10V is applied to the control gate in an erasure operation on the basis of an external power supply potential of 3V.

If a charge pump circuit corresponding to each case is mounted on the chip of a nonvolatile semiconductor memory device for the purpose of generating various voltages, a greater circuit area is required to result in increase in the entire chip area.

The same applies to the case where a negative potential is to be generated. In the example shown in FIG. 24, only one level of potential, i.e., -8V, is required as the negative potential. However, there is a possibility that a plurality of the levels of this negative potential is required for optimization of the circuit operation.

If a charge pump circuit corresponding to each case is incorporated in a chip in order to generate respective negative potentials, the chip area will be increased.

Japanese Patent Laying-Open No. 5-182481 discloses an erasure operation in which the variation in the threshold value becomes smaller with respect to a memory cell that is

below a predetermined threshold value after an erasure pulse is applied in order to reduce the threshold value distribution range of the memory cell in an erasure operation mode as well as to facilitate data rewriting. More specifically, by setting the voltage (for example 10V) applied to the control gate in a memory cell transistor in a writing operation after an erasure operation smaller than the voltage (for example 12V) applied in a normal writing operation mode, the threshold voltage of a memory cell can be gradually altered to improve the controllability of the threshold voltage.

In this case, at least two levels of voltages higher than the external power supply voltage are required.

SUMMARY OF THE INVENTION

In view of the foregoing, an object of the present invention is to provide an internal potential generation circuit that can generate a plurality of required internal potentials while suppressing circuit area.

Another object of the present invention is to provide an internal potential generation circuit that allows a plurality of internal potentials to charge speedily respective corresponding load capacitances.

According to an aspect of the present invention, an internal potential generation circuit receiving an external power supply potential for generating a first predetermined internal potential and a second predetermined internal potential having an absolute value smaller than that of the first predetermined internal potential includes a clock generation circuit, a first charge pump, a second charge pump, a switch circuit, and a control circuit.

The clock generation circuit outputs clock signals complementary to each other. The first charge pump circuit includes a first output node from which the first predetermined internal potential is output. The first charge pump circuit drives the potential of the first output node at a first current supply amount according to the complementary clock signals. The second charge pump circuit includes a second output node from which the second predetermined internal potential is output. The second charge pump circuit drives the potential of the second output node at a second current supply amount that is smaller than the first current supply amount according to the complementary clock signals. The switch circuit sets the connection between the first output node and the second output node in a conducting state or a cutoff state.

The control circuit controls the supply of complementary clock signals to the first and second charge pump circuits according to the potential level of the first and second output nodes. The control circuit drives the switch circuit to a cutoff state from a conducting state in response to the potential of the first and second output nodes attaining the second predetermined potential.

The main advantage of the present invention is that the potentials of the output nodes of the first and second charge pump circuits are maintained in common until the potentials of the first and second output nodes attain the level of the second predetermined potential. Therefore, even when the current supply amount of the first and second charge pump circuits differ, the load can be charged speedily with a common rising rate of the potential levels of the first and second output nodes.

Thus, increase in the circuit area can be suppressed even when the internal potential generation circuit has to generate a first predetermined internal potential and a second predetermined internal potential.

The foregoing and other objects, features, aspects and advantages of the present invention will become more

apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram showing a structure of a nonvolatile semiconductor memory device **1000** according to a first embodiment of the present invention.

FIG. 2 is a schematic block diagram of a structure of a high voltage generation circuit **200** of the first embodiment.

FIG. 3 is a circuit diagram showing a structure of a high voltage level detection circuit **206**.

FIG. 4 is a schematic block diagram showing a structure of a high voltage switch circuit **218**.

FIG. 5 is a schematic block diagram showing a structure of a CLK gate circuit **210**.

FIG. 6 is a circuit diagram showing a structure of a second charge pump circuit **216**.

FIG. 7 is a timing chart for describing an operation of high voltage generation circuit **200** of the first embodiment.

FIG. 8 is a schematic block diagram showing a structure of a CLK gate circuit **312** according to a second embodiment of the present invention.

FIG. 9 is a schematic block diagram showing a structure of a high voltage generation circuit **300** of the second embodiment.

FIG. 10 is a timing chart for describing an operation of high voltage generation circuit **300** of the second embodiment.

FIG. 11 is a schematic block diagram showing a structure of a negative voltage generation circuit **400** of the third embodiment.

FIG. 12 is a circuit diagram showing a structure of a high voltage level detection circuit **406**.

FIG. 13 is a circuit diagram showing a structure of a high voltage switch **418**.

FIGS. 14 and 15 are circuit diagrams showing a structure of a first charge pump circuit **414** and a second charge pump circuit **416**, respectively.

FIG. 16 is a timing chart for describing an operation of a negative voltage generation circuit **400** according to a third embodiment of the present invention.

FIG. 17 is a schematic block diagram showing a structure of a negative voltage generation circuit **500** according to a fourth embodiment of the present invention.

FIG. 18 is a timing chart for describing an operation of negative voltage generation circuit **500**.

FIG. 19 is a circuit diagram showing a structure of a conventional charge pump circuit **2000**.

FIG. 20 is a schematic cross section view of a transistor in conventional charge pump circuit **2000**.

FIG. 21 is a circuit diagram showing an equivalent circuit of conventional charge pump circuit **2000**.

FIG. 22 is a timing chart showing the transition of drive clock signals PH and /PH over time.

FIGS. 23A and 23B are schematic sectional views of a structure of a memory cell transistor in a conventional non-volatile semiconductor memory device for describing the potential of each component in a write operation (A) and in an erasure operation (B).

FIG. 24 shows the potential level in a writing operation, erasure operation, and a readout operation for a conventional non-volatile semiconductor memory device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIRST EMBODIMENT

Referring to FIG. 1, a nonvolatile semiconductor memory device **1000** according to a first embodiment of the present invention includes an address buffer **102** receiving external address signals **A0–Ai** for providing corresponding internal column address signal **Ay** and internal row address signal **Ax**, a source address **As1** signal, and a select gate address signal **Asg**, a memory cell array **104** in which memory cells are arranged in a matrix, an X decoder **106** for receiving an internal row address signal **Ax** from address buffer **102** for selecting a corresponding row (word line) in memory cell array **104**, and a Y decoder **108** receiving an internal column address signal **Ay** from address buffer **102** for selecting a corresponding column in memory cell array **104**.

Memory cell array **104** includes two memory cell array blocks **BLK0** and **BLK1**. In the example shown in FIG. 1, each of memory cell array blocks **BLK0** and **BLK1** includes four memory cell transistors. Memory cell array block **BLK0** includes memory cell transistors **MC1a** and **MC1b** having their drains connected to a sub bit line **SBL1**, memory cell transistors **MC2a** and **MC2b** having their drains connected to a sub bit line **SBL2**, a select gate **SG1** for opening/closing the connection with main bit line **BL1** and sub bit line **SBL1**, and a select gate **SG2** for opening/closing the connection with a main bit line **BL2** and a sub bit line **SBL2**.

The control gates of memory cell transistors **MC1a** and **MC2a** are both connected to a word line **WL1**. The control gates of memory cell transistors **MC1b** and **MC2b** are connected to a word line **WL2**.

Similarly, memory cell array block **BLK1** includes memory cell transistors **MC3a** and **MC3b** having respective drains connected to a sub bit line **SBL3**, and memory cell transistors **MC4a** and **MC4b** having respective drains connected to a sub bit line **SBL4**.

Memory cell array block **BLK1** further includes a select gate **SG3** for opening/closing the connection with main bit line **BL1** and sub bit line **SBL3**, and a select gate **SG4** for opening/closing the connection with main bit line **BL2** and sub bit line **SBL4**.

The control gates of memory cell transistors **MC3a** and **MC4a** are connected to a word line **WL3**. The control gates of memory cell transistors **MC3b** and **MC4b** are connected to word line **WL4**.

X decoder **106** selects any one of corresponding word lines **WL1–WL4** according to internal row address signal **Ax** from address buffer **102**.

Non-volatile semiconductor memory device **1000** further includes a high voltage generation circuit **200** receiving an external power supply voltage **Vcc** for generating a high voltage required for a writing or erasing operation of data with respect to a memory cell, a negative voltage generation circuit **400** receiving external power supply voltage **Vcc** for generating a negative voltage required for a writing or erasing operation with respect to a memory cell, a select gate decoder **114** receiving outputs of high voltage generation circuit **200** and negative voltage generation circuit **112** for controlling the gate potential of a corresponding one of select gates **SG1–SG4** according to a signal **Asg** to selectively connect a sub bit line with a main bit line, a source decoder **116** receiving an output of negative voltage generation circuit **400** for selectively applying a predetermined source potential to the source of a memory cell transistor

according to a signal **As1**, and a well potential drive circuit **120** receiving an output of negative voltage generation circuit **400** for controlling the well potential at the surface of the semiconductor substrate where a memory cell transistor is formed.

X decoder **106** receives an output of high voltage generation circuit **200** and negative voltage generation circuit **112** for supplying a predetermined negative voltage to a selected word line in a write operation and a high voltage to a selected word line in an erasure operation.

Nonvolatile semiconductor memory device **1000** further includes a write/erase control circuit **122** for controlling the write operation and erasure operation with respect to a memory cell, a data input/output buffer **124** for receiving internal data which is provided to an internal circuit or receiving data read out from a memory cell which is output, a data driver **126** receiving a write data applied to data input/output buffer **124** for driving a corresponding bit line potential, a sense amplifier **128** for providing a corresponding readout data according to the stored information in a selected memory cell via bit line **BL1** or **BL2** in reading out data, a write circuit **130** for receiving and maintaining the write data from data driver **126** for applying a high voltage from high voltage generation circuit **110** to a corresponding bit line, and a verify voltage generation circuit **100** for supplying a verify potential **VPVRF** to X decoder **10** in a verify operation mode.

This verify operation refers to an operation of confirming whether the memory cell threshold value attains a predetermined potential level when data is written into a memory cell.

Data driver **126** and sense amplifier **128** are connected to bit line **BL1** and bit line **BL2** via column select gate **SLG1** and column select gate **SLG2**, respectively. The gate potentials of select gates **SLG1** and **SLG2** are controlled by Y decoder **108**. Therefore, a selected bit line is connected to sense amplifier **128** or data driver **126** according to internal column address signal **Ay** from address buffer **102**.

The reason why the bit line is provided in a hierarchical structure of a main bit line and a sub bit line is set forth in the following.

In a structure where memory cell transistors **MC1a** and **MC1b** in memory cell array block **BLK0** and memory cell transistors **MC3a** and **MC3b** of memory cell array block **BLK1** are simultaneously connected to one bit line **BL1**, a high voltage will be applied even to the drain of the memory cell transistors in memory cell array blocks **BLK1** when data is to be written only to the memory cells in memory cell array block **BLK0**. This means that, in the writing phase of data into an adjacent memory cell array block **BLK0**, the load in the floating gate of a memory cell transistor in memory cell array block **BLK1** may be altered. There is a possibility that the written data is changed in the worst case.

To avoid the above problem, separate bit lines should be provided for each memory cell array block that carries out data writing. More specifically, a two-layered structure of main bit lines **BL1** and **BL2** and sub bit lines **SBL1–SBL4** is implemented. The main bit line connects all the memory cell array blocks, and the memory cell transistors in each memory cell array block is connected by sub bit lines **SBL1–SBL4**.

Select gates **SG1–SG4** are provided between main bit lines **BL1**, **BL2** and sub bit lines **SBL1–SBL4**. In a writing operation, the memory cell array block that is not selected is electrically disconnected from the main bit line by an appropriate select gate.

Thus, a memory cell transistor in a memory cell array block will not be affected by the writing operation of a memory cell transistor in another memory cell array block.

The structure of high voltage generation circuit **200** or negative voltage generation circuit **400** in nonvolatile semiconductor memory device **1000** of FIG. 1 will be described in detail hereinafter.

Referring to FIG. 2, high voltage generation circuit **200** includes a first boosting circuit **202** for providing a boosted potential V_{pp1} to an output node N_{H1} under control of control circuit **122** of FIG. 1, a second boosting circuit **204** for providing a second boosted potential V_{pp2} to a second output node N_{H2} under control of control circuit **122**, a high voltage switch circuit **218** for setting the connection between first and second output nodes N_{H1} and N_{H2} to a conducting state or a cutoff state under control of control circuit **122** and second boosting circuit **204**, and a clock generation circuit **220** for providing clock signals CLK and /CLK complementary to each other according to initiation of the operation of high voltage generation circuit **200**.

First boosting circuit **202** includes a high voltage level detection circuit **206** initiating an operation according to a first detection circuit activation signal DE1 from control circuit **122** to render a first clock activation signal PE1 active or inactive according to a potential level V_{pp1} output to first output node N_{H1} , a clock gate circuit **210** receiving clock signals CLK and /CLK for providing first drive clock signals PH1 and /PH1 complementary to each other and under control of signal PE1, and a first charge pump circuit **214** driven by signals PH1 and /PH1 for providing potential V_{pp1} to output node N_{H1} .

Second boosting circuit **204** includes a high voltage level detection circuit **208** for initiating an operation under control of a second detection circuit activation signal DE2 output from control circuit **122** for providing second clock activation signals PE2 and /PE2 complementary to each other, according to potential V_{pp2} output at output node N_{H2} , a clock gate circuit **212** receiving clock signals CLK and /CLK for providing second drive clock signals PH2 and /PH2 complementary to each other under control of signal PE2, and a second charge pump circuit **216** driven by signals PH2 and /PH2 for providing a potential V_{pp2} to output node N_{H2} .

High voltage switch circuit **218** is controlled by complementary signals DE2 and /DE2 and signal /PE2 output from high voltage level detection circuit **208** to set the connection between output nodes N_{H1} and N_{H2} conducting at initiation of an operation by high voltage generation circuit **200** and to set the connection between first and second output nodes N_{H1} and N_{H2} to a cutoff state in response to second output node N_{H2} attaining a predetermined potential level.

Here, it is assumed that first charge pump circuit **214** has a structure similar to that of the conventional charge pump circuit **2000** shown in FIG. 19. Second charge pump circuit **216** has a number of stages of diode-connected transistors connected in series, fewer in number than those of first charge pump circuit **214**.

More specifically, the amount of supply current of second charge pump circuit **216** is smaller than the amount of supply current of first charge pump circuit **214** according to equation (2).

Clock generation circuit **220** responds to activation of signal DE1 or DE2 to initiate an operation to output clock signals CLK and /CLK.

High voltage level detection circuit **206** and high voltage level detection circuit **208** of FIG. 2 have a similar structure,

provided that the input signal differs. Therefore, the structure of high voltage detection circuit **206** will be described hereinafter with reference to FIG. 3.

High voltage level detection circuit **206** includes resistors **R1** and **R2** connected to each other in series between a potential V_{pp1} and the ground potential. A potential V_{mon} of a level having potential V_{pp1} divided by the resistance ratio of resistors **R1** and **R2** is output from a connection node **N1** of resistors **R1** and **R2**.

High voltage level detection circuit **206** further includes a current mirror type differential amplifier circuit **2062** activated in response to activation of signal DE1 (transition to an H level), and receiving a predetermined reference potential V_{ref} and potential V_{mon} for amplifying the potential difference therebetween, a p channel MOS transistor **Q16** connected between an output node **N2** of current mirror type differential amplifier circuit **2062** and power supply potential V_{cc} , and rendered conductive according to inactivation of signal DE1 (transition to an L level), and a p channel MOS transistor **Q17** and N channel MOS transistors **Q18** and **Q19** connected in series between power supply potential V_{cc} and ground potential.

Transistors **Q17** and **Q18** have their gates both connected to a node **n2**. The gate of transistor **Q19** is supplied with potential V_{ref} .

High voltage level detection circuit **206** further includes an n channel MOS transistor **Q20** connected between a connection node **N3** of transistors **Q17** and **Q18** and the ground potential, rendered conductive in response to inactivation (transition to H level) of signal /DE1, and an inverter **2064** having an input node connected to node **n3** for providing signal PE1.

The potential of node **n3** is output as signal /PE1. The operation of high voltage level detection circuit **206** will be described hereinafter.

During the inactivation state (L level) of signal DE1, transistor **Q15** in differential amplifier circuit **2062** is cut off. Differential amplifier **2062** is inactive. Transistor **Q20** is rendered conductive in response to signal /DE1 attaining an inactive state (H level), whereby node **n3** attains an L level. In response, signal PE1 output from inverter **2064** attains an H level, and signal /PE1 attains an L level.

When signal DE1 is rendered active (H level), differential amplifier circuit **2062** is driven to an active state. In response, signals PE1 and /PE1 output from high voltage level detection circuit **206** shows a transition as set forth in the following according to the comparison of reference potential V_{ref} and potential V_{mon} .

i) When potential V_{mon} is greater than reference potential V_{ref}

Since signal DE1 attains an active state (H level), transistor **Q16** is cut off. Therefore, the potential of output node **n2** of differential amplifier circuit **2062** is driven to an L level. In response, transistor **Q17** attains a conducting state and transistor **Q18** attains a cutoff state. Therefore, the potential of node **n3** attains an H level. Accordingly, signals PE1 and /PE1 output from inverter **2064** attain an L level and an H level, respectively.

ii) When potential V_{mon} is lower than reference potential V_{ref}

In this case, output node **n2** of differential amplifier circuit **2062** attains an H level. In response, transistor **Q17** attains a cutoff state and transistor **Q18** attains a conducting state. Transistor **Q19** conducts since the gate thereof is supplied with reference potential V_{ref} . Therefore, the potential of node **n3** is driven to an L level.

Thus, signal PE1 output from inverter **2064** attains an H level, and signal /PE1 is driven to an L level.

More specifically, an active CLK activation signal PE1 is output from high voltage level detection circuit **206** when the level of potential Vpp1 output from output node N_{H1} of boosting circuit **202** becomes lower than a predetermined value.

FIG. 4 schematically shows high voltage switch circuit **218** of FIG. 2.

High voltage switch circuit **218** includes a flip-flop circuit **2182** receiving signal /PE2 as a set signal and signal /DE2 as a reset signal, an inverter **2184** receiving an output signal /TGX from flip-flop circuit **2182** to output an inverted signal TGX, a p channel MOS transistor **2188** for rendering the connection between output node N_{H1} of first boosting circuit **202** and output node N_{H2} of second boosting circuit **204** conductive or cut off, and a level conversion circuit **2186** for controlling the gate potential level of p channel MOS transistor **2188** under control of signals TGX and /TGX.

The back gate of p channel MOS transistor **2188** is connected to output node N_{H1}.

When signal TGX attains an L level and signal /TGX attains an H level, level conversion circuit **2186** applies the potential of an L level (ground potential) to the gate of p channel MOS transistor **2188**. During the period of signal TGX attaining an H level (signal /TGX attains an L level), the potential of node N_{H1} is supplied to the gate of p channel MOS transistor **2188**.

The operation of high voltage switch circuit **218** will be described hereinafter.

i) When signal DE2 attains an L level and signal PE2 attains an H level

As described with reference to FIG. 3, signal PE2 attains an H level in high voltage level detection circuit **208** during the period of signal DE2 attaining an inactive state (L level).

In this case, flip-flop circuit **2182** receives signal /PE2 of an L level and signal /DE2 of an H level. Therefore, signal /TGX output from flip-flop circuit **2182** attains an H level. P channel MOS transistor **2188** under control of level shift circuit **2186** attains a conductive state.

Therefore, the conducting state of output node N_{H1} of first boosting circuit **206** and output node N_{H2} of second boosting circuit **204** is maintained.

ii) When signal DE2 attains an H level

In this case, the level of potential V_{mon} is initially lower than reference potential V_{ref} in high voltage level detection circuit **206** shown in FIG. 3. Therefore, when signal DE2 attains an H level and high voltage level detection circuit **208** is rendered active, signal PE2 attains an H level.

Therefore, flip-flop circuit **2182** shows no change, and signal /TGX maintains the H level.

In other words, transistor **2188** is still conductive.

When signal PE2 is driven to an L level and signal /PE2 is driven to an H level, the potential applied to the gate of p channel MOS transistor **2188** from level conversion circuit **2186** becomes equal to the potential level of node N_{H1}, whereby p channel MOS transistor **2188** is cutoff.

As long as signal DE2 maintains the H level, the level of the potential output from flip-flop circuit **2182** does not change, so that p channel MOS transistor **2188** maintains the cutoff state thereafter independent of the potential level of signal PE2.

FIG. 5 schematically shows a structure of CLK gate circuit **210** of FIG. 2.

CLK gate circuit **212** has a structure basically similar to that of CLK gate circuit **210**, provided that the input and output signals differ.

CLK gate circuit **210** includes a first AND circuit **2102** receiving signals CLK and PE1 for providing a drive clock signal PH1, and a second AND circuit **2104** receiving signals /CLK and PE1 for providing a drive clock signal /PH1.

Therefore, CLK gate circuit **210** provides the input clock signals CLK and /CLK as drive clock signals PH1 and /PH1 only during activation (H level) of signal PE1.

Drive clock signals PH1 and /PH1 maintain the L level during the inactivation period of signal PE1.

FIG. 6 is a schematic block diagram showing the structure of charge pump circuit **216** of FIG. 2.

As described with reference to FIG. 2, first charge pump circuit **214** has a structure similar to that of the conventional charge pump circuit **2000**.

However, first charge pump circuit **214** has 7 stages of diode-connected transistors driven by drive clock signals PH1 and /PH1 via coupling capacitors C1–C6, whereas second charge pump circuit **216** has 3 stages of diode-connected transistors.

Therefore, the amount of supply current of second charge pump circuit **216** has a value smaller than that of first charge pump circuit **214** according to equation (2).

FIG. 7 is a timing chart for describing an operation of high voltage generation circuit **200** of FIG. 2.

It is assumed that detection circuit activation signals DE1 and DE2 output from control circuit **122** both attain an L level at time t₀. Here, CLK activation signals PE1 and PE2 output from high voltage level detection circuits **206** and **208**, respectively, both attain an H level.

As described with reference to FIG. 4, p channel MOS transistor **2188** in high voltage switch circuit **218** attains a conductive state according to the above-described signal levels.

At time t₁, signals DE1 and DE2 are both driven to an active state (H level).

In response, clock generation circuit **220** begins to output clock signals CLK and /CLK.

First and second charge pump circuits **214** and **216** respond to drive clock signals PH1, /PH1 and PH2, /PH2 applied to CLK gate circuits **210** and **212**, respectively, to boost the potential level of corresponding output nodes N_{H1} and N_{H2}. It is to be noted that since high voltage switch circuit **218** is conductive, the potential levels of output nodes N_{H1} and N_{H2} are maintained equally.

In other words, first charge pump circuit **214** of a greater amount of supply current governs the drive of the potential levels of output nodes N_{H1} and N_{H2} in this phase.

At time t₃, signal /PE2 is driven to an H level in response to high voltage level detection circuit **208** detecting that the potential level of output node N_{H1} (i.e. the potential level of output node N_{H2}) has arrived at a predetermined potential level.

In response, signal /TGX output from flip-flop circuit **2182** in high voltage switch circuit **218** is driven to an L level. Signal TGX output from inverter **2184** is driven to an H level.

High voltage switch circuit **218** is cut off under control of these signals TGX and /TGX.

Therefore, from time t₃ onward, the potential level of output node N_{H1} and the potential level of output node N_{H2}

are controlled independently by first and second boosting circuits **202** and **204**, respectively.

Since the level of potential Vpp2 output from output node N_{H2} of second boosting circuit **204** has already arrived at a predetermined potential level at time t3, high voltage level detection circuit **208** provides control of CLK gate circuit **212** according to whether this potential level Vpp2 exceeds a predetermined lower limit potential level.

At time t4 when high voltage level detection circuit **208** detects that potential Vpp2 has become lower than the predetermined lower limit potential level (V_{s2}), a CLK activation signal PE2 changes from "L" level to "H" level and high voltage level detection circuit **208** causes drive clock signals PH2 and /PH2 to be output to second charge pump circuit **216** from CLK gate circuit **212** with an active CLK activation signal PE2.

Accordingly, potential Vpp2 begins to rise again. At time t5 when high voltage level detection circuit **208** detects that potential Vpp2 has arrived at the level of the predetermined potential level, signal PE2 is rendered inactive, whereby supply of the drive clock signal to second charge pump circuit **216** is suppressed.

In a similar manner, second boosting circuit **204** is controlled so that potential Vpp2 maintains a predetermined potential level.

It is noted that since the potential level Vpp1 of output node N_{H1} of first boosting circuit **202** has not arrived at the predetermined potential level in the phase of time t3, CLK activation signal PE1 output from high voltage level detection circuit **206** maintains an active state even after t3.

When high voltage level detection circuit **206** detects that potential Vpp1 has arrived at the predetermined potential level at time t6, CLK activation signal PE1 is rendered inactive.

In response, the operation of first charge pump circuit **214** is inhibited. This causes the level of potential Vpp1 to gradually be reduced. When high voltage level detection circuit **206** detects that potential Vpp1 becomes lower than the predetermined lower limit level (V_{s1}) at time t7, CLK activation signal PE1 is rendered active.

In response, first charge pump circuit **214** initiates operation, whereby potential Vpp1 rises to at least the predetermined potential level. Thereafter, the level of potential Vpp1 output from first boosting circuit **202** is maintained at the predetermined value under control of high voltage level detection circuit **206**.

By the above-described operation in the high voltage generation circuit of the first embodiment, the rise of potential level Vpp2 output from second boosting circuit **204** can be set equal to the rise of first boosting circuit **202** even when the amount of supply current of second charge pump circuit **216** is small, i.e. the circuit area of second charge pump circuit **216** is small.

Since second charge pump circuit **216** requires only the amount of current supply for maintaining potential Vpp2 at a predetermined potential level, increase in the circuit area can be suppressed even when high voltage generation circuit **200** provides first and second high voltage outputs Vpp1 and Vpp2 in comparison to the case where potentials Vpp1 and Vpp2 are generated by completely independent boosting circuits.

The present invention is not limited to the above-described embodiment where two types of high voltages are output from high voltage generation circuit **200**. The present invention is applicable to the case where more high voltages should be output.

SECOND EMBODIMENT

FIG. 9 shows a structure of a high voltage generation circuit **300** according to a second embodiment of the present invention.

High voltage generation circuit **300** of the second embodiment differs from high voltage generation circuit **200** of the first embodiment in that a CLK gate circuit **312** in second boosting circuit **204** operates under control of a signal TGX generated in high voltage switch **218** and CLK activation signal PE2.

The remaining elements are similar to those of high voltage generation circuit **200** of the first embodiment shown in FIG. 2. Corresponding components have the same reference characters allotted, and their description will not be repeated.

FIG. 8 is a circuit diagram showing a structure of CLK gate circuit **312** of FIG. 9.

CLK gate circuit **312** includes an AND circuit **3122** receiving clock signal CLK, signal TGX and signal PE2 for providing a first drive clock signal PH2, and an AND circuit **3124** receiving clock signal /CLK, signal TGX and signal PE2 for providing a second drive clock signal /PH2.

Therefore, CLK gate circuit **312** provides first and second drive clock signal PH2 and /PH2 according to clock signals CLK and /CLK only during the period where both signals TGX and PE2 attain an active state (H level).

FIG. 10 is a timing chart for describing an operation of high voltage generation circuit **300** of FIG. 9.

At time t0, detection circuit activation signals DE1 and DE2 output from control circuit **122** are both inactive. At time t1, signals DE1 and DE2 are driven to an active state (H level). At time t0, signal PE2 attains an active state and signal /PE2 attains an L level. Signal /DE2 attains an H level. Therefore, high voltage switch **218** shown in FIG. 9 conducts.

At time t1, high voltage switch **218** maintains the conducting state even when signal DE2 is driven to an H level, i.e., signal /DE2 is driven to an L level.

More specifically, signal TGX output from high voltage switch **218** attains an L level. Therefore, active drive clock signals PH2 and /PH2 are not output from CLK gate circuit **312**. Thus, second charge pump circuit **216** is still inhibited of an operation.

During the period of time t1 to time t3, only first charge pump circuit **214** operates. The potentials of output nodes N_{H1} and N_{H2} of first and second boosting circuits **202** and **204**, respectively, are driven by only first charge pump circuit **214**.

At time t3 when the potential of node N_{H2} attains a predetermined potential level, high voltage level detection circuit **208** drives the potential of signal PE2 to an L level. In response, signal /PE2 input to high voltage switch circuit **218** is pulled up to an H level, whereby high voltage switch circuit **218** is cut off. The transition of signal /PE2 to an H level also causes signal TGX to be driven to an H level.

Although signal TGX attains an H level in CLK gate circuit **312**, signal PE2 attains an L level. Therefore, drive clock signals PH2 and /PH2 are still not supplied to second charge pump circuits **216**.

At time t4 when high voltage level detection circuit **208** detects that the potential of node N_{H2}, i.e., the level of potential Vpp2, is below a predetermined lower limit potential level (V_{s1}), high voltage level detection circuit **208** drives signal PE2 active. At this time point, signals PE2 and

TGX are both pulled up to an H level. Therefore, active drive clock signals PH2 and /PH2 are supplied to second charge pump circuit 216 from CLK gate circuit 312.

In response, potential Vpp2 is driven independently by second charge pump circuit 216 to be boosted again to the level of the predetermined potential level. At time t5 when high voltage level detection circuit 208 detects that potential Vpp2 attains the predetermined potential level, signal PE2 is rendered inactive. In response, supply of the drive clock signal to second charge pump circuit 216 is suppressed.

Similarly thereafter, potential Vpp2 is controlled independently by second boosting circuit 204.

At time t3 when high voltage switch circuit 218 is cut off, potential Vpp1 output from first boosting circuit 202 has not yet arrived at the predetermined potential level. Therefore, high voltage level detection circuit 206 maintains signal PE1 at the active state (H level). Therefore, first charge pump circuit 214 continues a boosting operation with independent control of potential Vpp1.

At time t6 when high voltage level detection circuit 206 detects that potential Vpp1 arrives at the predetermined potential level, signal PE1 is rendered inactive.

In response, supply of drive clock signals PH1 and /PH1 to first charge pump circuit 214 is suppressed. At time t7 when high voltage level detection circuit 206 detects that potential Vpp1 has become lower than the first predetermined lower limit potential level (V_{s1}), signal PE1 is rendered active ("H" level) again. Therefore, a boosting operation of potential Vpp1 by first charge pump circuit 214 is carried out.

The potentials of output nodes N_{H1} and N_{H2} from which potentials Vpp1 and Vpp2 are supplied, respectively, are both driven by first charge pump circuit 214 at the initial stage of the boosting operation.

Second charge pump circuit 216 only has to maintain the potential of Vpp2 boosted to the second predetermined potential level. Therefore, even if the amount of supply current of second charge pump circuit 216 is set smaller than that of first charge pump circuit 214, i.e. the circuit area of second charge pump circuit 216 is set smaller than that of first charge pump circuit 214, the potential level of node N_{H2} can be raised similar to that of node N_{H1} at the initial stage of the boosting operation.

THIRD EMBODIMENT

FIG. 11 shows a structure of negative voltage generation circuit 400 of FIG. 1.

Negative voltage generation circuit 400 of the third embodiment differs from high voltage generation circuit 200 of the first embodiment shown in FIG. 2 in the following points.

Negative voltage generation circuit 400 includes a first negative potential drive circuit 402, a second negative potential drive circuit 404, a negative high voltage switch 418, and a clock generation circuit 220.

First negative potential drive circuit 402 has the potential level of its output node Nn1 controlled by control circuit 122 to be driven to a negative high voltage (for example, -10V). Second negative potential drive circuit 404 drives the potential of output node Nn1 to a negative high potential level. Here, the amount of supply current of second negative potential drive circuit 404 is set smaller than the amount of supply current of first negative potential drive circuit 402. High voltage switch 418 is controlled by control circuit 122 and by the potential level of output node Nn1 to open/close the connection between nodes Nn1 and Nn2.

More specifically, negative voltage generation circuit 400 differs in structure from high voltage generation circuit 200 in that first and second negative potential drive circuits 402 and 404 both drive the potential level of the output nodes negative, and that high voltage switch circuit 418 opens/closes the connection of the two output nodes Nn1 and Nn2 which attain a negative potential level.

First negative potential drive circuit 402 includes a high voltage level detection circuit 406 activated in response to a detection circuit activation signal DE1 from control circuit 122 to render CLK activation signal PE1 active upon detecting that the potential level of output node Nn1 attains at least a predetermined potential level, a CLK gate circuit 410 activated according to signal PE1, and receiving clock signals CLK and /CLK for providing drive clock signals PH1 and /PH1, and a charge pump circuit 414 for driving the level of output node Nn1 to a negative potential at the first current supply amount according to drive clock signals PH1 and /PH1.

Second negative potential drive circuit 404 includes a high voltage level detection circuit 408 activated in response to detection circuit activation signal DE2 from control circuit 122 for rendering CLK activation signal PE2 active when the potential level of output node Nn2 is higher than a second predetermined potential, a CLK gate circuit 412 activated in response to signal PE2 for receiving clock signals CLK and /CLK and providing drive clock signals PH2 and /PH2, and a second charge pump circuit 416 driven according to signals PH2 and /PH2 for driving the potential level of output node Nn2 at the second predetermined supply current amount.

Signal /PE2 which is an inverted version of signal PE2 is output from negative high voltage level detection circuit 406. High voltage switch circuit 418 is switched between a conductive state and a cutoff state under control of signal /DE2 which is an inverted version of detection circuit activation signal DE2 and signal /PE2.

FIG. 12 is a circuit diagram showing a structure of negative high voltage level detection circuit 406 of FIG. 11, and is comparative with FIG. 3.

The structure of high voltage level detection circuit 408 is basically similar to that of high voltage level detection circuit 406 of FIG. 12, provided that the input and output signals and the level of the reference potential differ.

High voltage level detection circuit 406 of FIG. 12 differs in structure from high voltage level detection circuit 206 of FIG. 13 in the following two points.

First, node n1 that provides Vmon which is the input signal of differential amplifier circuit 4062 corresponds to the connection node of resistors R1 and R2 connected in series between power supply potential Vcc and potential Vnn1.

Second, the potential of output node N2 of differential amplifier circuit 4062 is driven as set forth in the following with respect to potential Vmon that is input to differential amplifier circuit 4062 and first reference potential Vref1.

When the level of potential Vmon is higher than potential Vref1, the level of node N1 is driven to an H level. When the level of potential Vmon is lower than potential Vref1, the potential of node N2 is driven to an L level.

Therefore, when potential Vmon is higher than potential Vref1, signal PE1 is driven to an H level and signal /PE1 is driven to an L level.

When potential Vmon is lower than reference Vref1, signal PE1 is driven to an L level and signal /PE1 is driven to an H level.

The remaining elements are similar to those of high voltage level detection circuit 206 of FIG. 3. Corresponding components have the same reference characters allotted, and their description will not be repeated.

FIG. 13 is a circuit diagram showing a structure of high voltage switch circuit 418 of FIG. 11, and is comparative to FIG. 4.

The difference in structure of high voltage switch circuit 418 of FIG. 13 over high voltage switch circuit 218 of FIG. 4 is set forth in the following.

Firstly, high voltage switch circuit 418 includes a p channel MOS transistor 4190 between the output node of inverter 2184 that receives a signal from flip-flop circuit 2182 and provides an inverted version thereof and level shift circuit 4186 for preventing transmission of a potential of a level lower than the ground potential to the output side of inverter 2184.

P channel MOS transistor 4190 is connected between the input node of level shift circuit 4186 and the output node of inverter 2184 for receiving the ground potential at its gate and the output of inverter 2184 at its back gate.

Secondly, level shift circuit 4186 switches between a state providing power supply potential V_{cc} and the potential level of node N_{H2} according to the signal output from inverter 2184.

Thirdly, the connection of nodes N_{H1} and N_{H2} is closed/opened by n channel MOS transistor 4188.

N channel MOS transistor 4188 is connected between nodes N_{H1} and N_{H2} , and receives the output of level shift circuit 4186 at its gate and the potential level of node N_{H2} at its back gate.

High voltage switch circuit 418 renders the connection between nodes N_{H1} and N_{H2} conductive when signals DE2, /DE2, and /PE2 attain an L level, an H level, and an L level, respectively.

This conductive state is maintained even when signal /DE2 is driven to an L level (H level for signal DE2) while signal /PE2 remains at the L level.

In response to signal /PE2 pulled up to an H level while signal /DE2 attains an L level (H level for signal DE2), transistor 4188 is cut off.

FIG. 14 is a diagram showing the structure of first charge pump circuit 414 of negative voltage generation circuit 400 of FIG. 11, and is comparative to FIG. 19.

First charge pump circuit 414 of FIG. 14 differs from the first charge pump circuit 414 of FIG. 19 in that the gate and source of transistor Q1 both receive ground potential. The remaining elements are similar to those of charge pump circuit 2000 of FIG. 19.

FIG. 15 is a circuit diagram showing a structure of second charge pump circuit 416 of negative voltage generation circuit 400 of FIG. 11.

Second charge pump circuit 416 of FIG. 15 differs from first charge pump circuit 414 of FIG. 14 in that first charge pump circuit 414 includes 7 stages of diode-connected transistors in series, whereas second charge pump circuit 416 includes 3 stages of diode-connected transistors in series.

Therefore, there are six coupling capacitors C1–C6 in the charge pump circuit of FIG. 14 whereas there are only two coupling transistors C1' and C2' in the second charge pump circuit 416 shown in FIG. 15. According to equation (2), the amount of supply current of second charge pump circuit 416 has a smaller value than that of first charge pump circuit 414.

FIG. 16 is a timing chart for describing an operation of negative voltage generation circuit 400 of FIG. 11.

It is assumed that detection circuit activation signals DE1 and DE2 output from control circuit 122 both attain an L level at time t0. Here, CLK activation signals PE1 and PE2 output from high voltage level detection circuits 406 and 408, respectively, both attain an H level.

In the case where the levels of the signals are as described above, n channel MOS transistor 4188 in high voltage switch circuit 418 attains a conductive state as described with reference to FIG. 13.

At time t1, signals DE1 and DE2 are both driven to an active state (H level).

First and second charge pump circuits 414 and 416 respond to drive clock signals PH1, /PH1 and PH2, /PH2 from CLK gate circuits 410 and 412, respectively, to raise the potential levels of corresponding output nodes Nn1 and Nn2. It is to be noted that the potential levels of output nodes Nn1 and Nn2 are maintained equally since high voltage switch circuit 418 conducts.

At the present stage, first charge pump circuit 414 of a greater amount of supply current governs the drive of the potential levels of output nodes Nn1 and Nn2.

At time t3 when high voltage level detection circuit 408 detects that the potential level of output node Nn1 (i.e., the potential level of output node Nn2) has arrived at a predetermined potential level, signal /PE2 is pulled up to an H level.

In response, signal TGX output from inverter 2184 receiving a signal from flip-flop circuit 2182 in high voltage switch circuit 418 is driven to an H level.

Under control of signal TGX, high voltage switch circuit 418 is cut off.

Thus, the potential levels of output nodes Nn1 and Nn2 are controlled independently by first and second negative potential drive circuits 402 and 404, respectively, after time t3.

This is because, since the level of potential Vnn2 from output node Nn2 of second negative potential drive circuit 404 has already reached the predetermined potential level at time t3, CLK gate circuit 412 is driven under control of high voltage level detection circuit 408 according to whether potential Vnn2 is below a predetermined upper limit potential level (V_{R2}).

In general, the potential level of node Nn2 gradually increases after the inactivation of charge pump circuit 416 owing to a very slight leakage current.

For example, when high voltage level detection circuit 408 detects that potential Vnn2 has become higher than the predetermined upper limit potential level (V_{R2}) at time t4, a CLK activation signal PE2 changes from "L" level to "H" level and high voltage level detection circuit 408 provides drive clock signals PH2 and /PH2 from CLK gate circuit 412 to second charge pump circuit 416 with an active CLK activation signal PE2.

This causes the level of potential Vnn2 to be reduced again. When high voltage level detection circuit 408 detects that potential Vnn2 has become lower than the predetermined potential level at time t5, signal PE2 is rendered inactive, whereby supply of drive clock signals to second charge pump circuit 416 is suppressed.

Thus, second negative potential drive circuit 204 is controlled so that potential Vnn2 maintains a predetermined potential level thereafter.

At the time point of t3, potential Vnn1 of output node Nn1 of first potential drive circuit 202 has not arrived at the

predetermined potential level. Therefore, CLK activation signal PE1 output from high voltage level detection circuit 406 maintains an active state even after time t3. When high voltage level detection circuit 406 detects that potential Vnn1 has arrived at a predetermined potential level at time t6, CLK activation signal PE1 is rendered inactive.

In response, the operation of first charge pump circuit 414 is suppressed. The level of potential Vnn1 gradually begins to rise due to the suppression of first charge pump circuit 414. At time t7 when high voltage level detection circuit 406 detects that potential Vnn1 has become higher than the predetermined upper limit level (V_{R1}), CLK activation signal PE1 is rendered active.

Accordingly, first charge pump circuit 414 operates again, whereby potential Vnn1 reduces to at least the predetermined potential level. Thus, the level of potential Vnn1 output from first negative potential drive circuit 402 is maintained at a predetermined level under control of high voltage level detection circuit 406.

According to the above-described operation in the high voltage generation circuit of the third embodiment, the fall of potential level Vnn2 output from second negative potential drive circuit 404 can be set identical to that of first negative potential drive circuit 402 even when the amount of supply current of second charge pump circuit 416 is small, i.e., even when the circuit area of second charge pump circuit 416 is small.

Second charge pump circuit 416 requires an amount of current supply for only maintaining potential Vnn2 at the predetermined potential level. Therefore, increase in the circuit area can be suppressed even when negative voltage generation circuit 400 provides a first high voltage output Vnn1 and a second high voltage output Vnn2 in comparison to the case where potentials Vnn1 and Vnn2 are generated by completely independent negative potential drive circuits.

The present invention is not limited to negative voltage generation circuit 400 from which only two types of high voltages are provided. The present invention is applicable to the case where more types of high voltages are output.

FOURTH EMBODIMENT

FIG. 17 is a block diagram showing a structure of negative voltage generation circuit 500 according to a fourth embodiment of the present invention.

The difference of negative voltage generation circuit 500 of the fourth embodiment over the negative voltage generation circuit of the third embodiment shown in FIG. 11 is set forth in the following.

In negative voltage generation circuit 500 of the fourth embodiment, a CLK gate circuit 512 in a second negative potential drive circuit 404 is operated under control of CLK activation signal PE2 from high voltage level detection circuit 408 and signal TGX from high voltage switch 418.

More specifically, similar to the structure of CLK gate circuit 312 of the second embodiment shown in FIG. 8, CLK gate circuit 512 provides clock signals CLK and /CLK from clock generation circuit 220 as drive clock signals PH2 and /PH2 only during the period where signals TGX and PE2 are both active (H level).

At the initial stage of operation of negative voltage generation circuit 500, high voltage switch 418 attains a conductive state, and CLK gate circuit 512 does not output active drive clock signals PH2 and /PH2.

Therefore, second charge pump circuit 416 will not operate until output node Nn2 attains a predetermined potential level.

The remaining elements are similar to those of negative voltage generation circuit 400 of the third embodiment shown in FIG. 11. Corresponding components have the same reference characters allotted, and their description will not be repeated.

FIG. 18 is a timing chart for describing an operation of negative voltage generation circuit 500 of FIG. 17.

At time t0, detection circuit activation signals DE1 and DE2 from control circuit 122 are both inactive. At time t1, signals DE1 and DE2 are driven to an active state (H level). Signals PE2 and /PE2 attain an active state and an L level, respectively, at time t0. High voltage switch 418 of FIG. 17 conducts since signal /DE2 attains an H level.

High voltage switch 418 maintains the conducting state even when signal DE2 is driven to an H level, i.e., signal /DE2 is driven to an L level at time t1.

More specifically, signal TGX output from high voltage switch 418 attains an L level. Therefore, active drive clock signals PH2 and /PH2 are not output from CLK gate circuit 412. Thus, second charge pump circuit 216 still has its operation suppressed.

During the period of time t1 to time t3, only first charge pump circuit 414 operates. The potential levels of output nodes Nn1 of first negative potential drive circuit 402 and output node Nn2 of second negative potential drive circuit 404 is driven only by first charge pump circuit 414.

At time t3 when the potential level of node Nn2 attains a predetermined potential level, high voltage level detection circuit 408 drives the potential level of signal PE2 to an L level. In response, signal /PE2 applied to high voltage switch circuit 418 is pulled up to an H level, whereby high voltage switch circuit 418 is cut off. Also, in response to transition of signal /PE2 to an H level, signal TGH is pulled up to an H level.

Although signal TGX attains an H level in CLK gate circuit 512, signal PE2 attains an L level. Therefore, drive clock signals PH2 and /PH2 are still not supplied to second charge pump circuit 416.

At time t4 when high voltage level detection circuit 408 detects that the potential level of node Nn2, i.e., the potential Vnn2, has arrived at a predetermined upper limit potential level, high voltage level detection circuit 408 drives signal PE2 to an active state. At this time point, signals PE2 and TGX are both driven to an H level. Therefore, active drive clock signals PH2 and /PH2 are supplied to second charge pump circuit 416 from CLK gate circuit 512.

Potential Vnn2 is driven independently by second charge pump circuit 416 to fall again to the predetermined potential level. At time t5 when high voltage level detection circuit 408 detects that potential Vnn2 has become lower than the predetermined potential level, signal PE2 is rendered inactive. In response, supply of drive clock signals to second charge pump circuit 416 is suppressed.

Thus, potential Vnn2 is controlled independently by second negative potential drive circuit 404 in a similar manner thereafter.

At the time point of t3 when high voltage switch circuit 418 is cut off, potential Vnn1 output from first negative potential drive circuit 402 has not arrived at the predetermined potential level set for potential Vnn1. Therefore, high voltage level detection circuit 406 maintains signal PE1 at an active state (H level). Therefore, first charge pump circuit 414 controls potential Vnn1 independently to continue the voltage-down operation.

At time t6 when high voltage level detection circuit 406 detects that potential Vnn1 has arrived at a predetermined potential level, signal PE1 is driven to an inactive state.

In response, supply of drive clock signals PH1 and /PH1 to first charge pump circuit 414 is suppressed. At time t7 when high voltage level detection circuit 406 detects that the level of potential Vnn1 has become higher than a first predetermined upper limit potential level, signal PE1 is rendered active again, whereby the voltage-down operation of potential Vnn1 by first charge pump circuit 414 is carried out.

In negative potential drive circuit 500 of the fourth embodiment, the potentials of output node Nn1 from which potential Vnn1 is supplied and output node Nn2 from which potential Vnn2 is supplied are both driven by first charge pump circuit 414 at the initial stage of the voltage-down operation.

Second charge pump circuit 416 only has to carry out the operation of maintaining potential Vnn2 reduced to the second predetermined potential level. Therefore, the potential level of node Nn2 can be raised similarly as the potential level of node Nn1 at the initial stage of the voltage-down operation even when the amount of supply current of the second charge pump circuit is smaller than that of the first charge pump circuit, i.e. the circuit area of second charge pump circuit 416 is set smaller than that of first charge pump circuit 414.

Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

What is claimed is:

1. An internal potential generation circuit receiving an external power supply potential for generating a first predetermined internal potential and a second predetermined internal potential having an absolute value smaller than the absolute value of said first predetermined internal potential, comprising:

- a clock generation circuit for providing clock signals complementary to each other,
- a first charge pump circuit including a first output node from which said first predetermined internal potential is to be output, for driving potential of said first output node with a first capacity of current supply according to said complementary clock signals,
- a second charge pump circuit including a second output node from which said second predetermined internal potential is to be output, for driving potential of said second output node with a second capacity of current supply according to said complementary clock signals,
- a switch circuit for setting connection between said first output node and said second output node to any of a conducting state and a cutoff state, and
- a control circuit for controlling supply of said complementary clock signals to said first charge pump circuit and said second charge pump circuit, respectively, according to the potential level of said second output node, said control circuit setting said switch circuit to the cutoff state from the conducting state in response to the potential of said first and second output nodes attaining said second predetermined potential.

2. The internal potential generation circuit according to claim 1, wherein said first and second predetermined internal potentials are both positive potentials,

wherein said control circuit controls supply of said complementary clock signals to said first charge pump

circuit so that the potential level of said first output node attains said first predetermined internal potential, and controls supply of said complementary clock signals to said second charge pump circuit so that the potential level of said second output node attains said second predetermined internal potential after said switch circuit is set to the cutoff state.

3. The internal potential generation circuit according to claim 1, wherein said first predetermined internal potential and said second predetermined internal potential are both positive potentials,

wherein said control circuit comprises

- a first internal control circuit for controlling supply of said complementary clock signals to said first charge pump circuit so that the potential level of said first output node attains said first predetermined internal potential after said switch circuit is set to the cutoff state, and

- a second internal control circuit for controlling supply of said complementary clock signals to said second charge pump circuit so that the potential level of said second output node attains said second predetermined internal potential after said switch circuit is set to the cutoff state.

4. The internal potential generation circuit according to claim 2, wherein said control circuit initiates supply of said complementary clock signals to both said first and second charge pump circuits according to initiation of an operation of said internal potential generation circuit.

5. The internal potential generation circuit according to claim 3, wherein said second internal control circuit renders an internal control signal inactive in response to the potential level of said second output node attaining at least said second predetermined internal potential,

wherein said switch circuit comprises

- a latch circuit attaining a set state in response to inactivation of said internal control signal, and attaining a reset state according to suppression of operation of said internal potential generation circuit, and
- a connection circuit for setting connection between said first output node and said second output node to the cutoff state according to said latch circuit attaining the set state.

6. The internal potential generation circuit according to claim 2, wherein said control circuit initiates supply of said complementary clock signals to said first charge pump circuit in response to initiation of an operation of said internal potential generation circuit, and initiating supply of said complementary clock signals to said second charge pump circuit after said switch circuit attains the cutoff state.

7. The internal potential generation circuit according to claim 3, wherein said second internal control circuit comprises

- a potential level detection circuit for rendering an internal control signal inactive in response to the potential level of said second output node attaining at least said second predetermined internal potential, and
- a clock supply control circuit for controlling supply of said complementary clock signals to said second charge pump circuit,

wherein said switch circuit comprises

- a latch circuit attaining a set state in response to inactivation of said internal control signal, and attaining a reset state in response to suppression of operation of said internal potential generation circuit, and

23

a connection circuit for setting connection between said first output node and said second output node to the cutoff state in response to said latch circuit attaining the set state,

wherein said clock supply control circuit initiates supply of said complementary clock signals when said internal control signal is inactive and said latch circuit attains the set state.

8. The internal potential generation circuit according to claim 1, wherein said first predetermined internal potential and said second predetermined internal potential are both negative potentials,

wherein said control circuit controls supply of said complementary clock signals to said first charge pump means so that the potential level of said first output node attains said first predetermined internal potential, and controls supply of said complementary clock signals to said second charge pump circuit so that the potential level of said second output node attains said second predetermined internal potential, after said switch circuit attains the cutoff state.

9. The internal potential generation circuit according to claim 1, wherein said first predetermined internal potential and said second predetermined internal potential both are negative potentials,

wherein said control circuit comprises

first internal control circuit for controlling supply of said complementary clock signals to said first charge pump circuit so that the potential level of said first output node attains said first predetermined internal potential after said switch circuit is set to the cutoff state, and

second internal control circuit for controlling supply of said complementary clock signals to said second charge pump circuit so that the potential level of said second output node attains said second predetermined internal potential after said switch circuit is set to the cutoff state.

10. The internal potential generation circuit according to claim 8, wherein said control circuit initiates supply of said complementary clock signals to both said first and second charge pump circuits in response to initiation of an operation of said internal potential generation circuit.

11. The internal potential generation circuit according to claim 9, wherein said second internal control circuit renders an internal control signal inactive in response to the potential

24

level of said second output node becoming lower than said second predetermined internal potential,

wherein said switch circuit comprises

a latch circuit attaining a set state in response to inactivation of said internal control signal, and attaining a reset state according to suppression of operation of said internal potential generation circuit, and

a connection circuit for setting connection between said first output node and said second output node to the cutoff state according to said latch circuit attaining the set state.

12. The internal potential generation circuit according to claim 8, wherein said control circuit initiates supply of said complementary clock signals to said first charge pump circuit in response to initiation of operation of said internal potential generation circuit, and initiating supply of said complementary clock signals to said second charge pump circuit after said switch circuit attains the cutoff state.

13. The internal potential generation circuit according to claim 9, wherein said second internal control circuit comprises

a potential level detection circuit for rendering an internal control signal inactive in response to the potential level of said second output node becoming lower than said second predetermined internal potential,

a clock supply control circuit for controlling supply of said complementary clock signals to said second charge pump circuit,

wherein said switch circuit comprises

a latch circuit attaining a set state in response to inactivation of said internal control signal, and attaining a reset state according to suppression of operation of said internal potential generation circuit, and

a connection circuit for setting connection of said first output node and said second output node to the cutoff state in response to said latch circuit attaining the set state,

wherein said clock supply control circuit initiates supply of said complementary clock signals in response to said internal control signal attaining an active state and said latch circuit attaining the set state.

* * * * *