




US 20050180368A1

(19) **United States**(12) **Patent Application Publication****Hansen et al.**(10) **Pub. No.: US 2005/0180368 A1**(43) **Pub. Date: Aug. 18, 2005**(54) **MULTIPLE PROTOCOL WIRELESS COMMUNICATIONS IN A WLAN****Publication Classification**(51) **Int. Cl.<sup>7</sup> ..... H04Q 7/24**(52) **U.S. Cl. .... 370/338**(76) **Inventors: Christopher J. Hansen**, Sunnyvale, CA (US); **Jason A. Trachewsky**, Menlo Park, CA (US); **R. Tushar Moorti**, Mountain View, CA (US); **Matthew J. Fischer**, Mountain View, CA (US)

Correspondence Address:

**GARLICK HARRISON & MARKISON LLP**  
**P.O. BOX 160727****AUSTIN, TX 78716-0727 (US)**(21) **Appl. No.: 10/857,544**(22) **Filed: May 28, 2004****Related U.S. Application Data**(60) **Provisional application No. 60/544,605, filed on Feb. 13, 2004.**(57) **ABSTRACT**

A method for multiple protocol wireless communications begins by determining protocols of wireless communication devices within a proximal region. The method then continues by determining whether the protocols of the wireless communication devices within the proximal region are of a like protocol. The method continues by, when the protocols of the wireless communication devices within the proximal region are not of a like protocol, selecting a protocol of the protocols of the wireless communication devices within the proximal region based on a protocol ordering to produce a selected protocol. The method continues by utilizing the selected protocol by the wireless communication devices within the proximal region to set up a wireless communication within the proximal region.

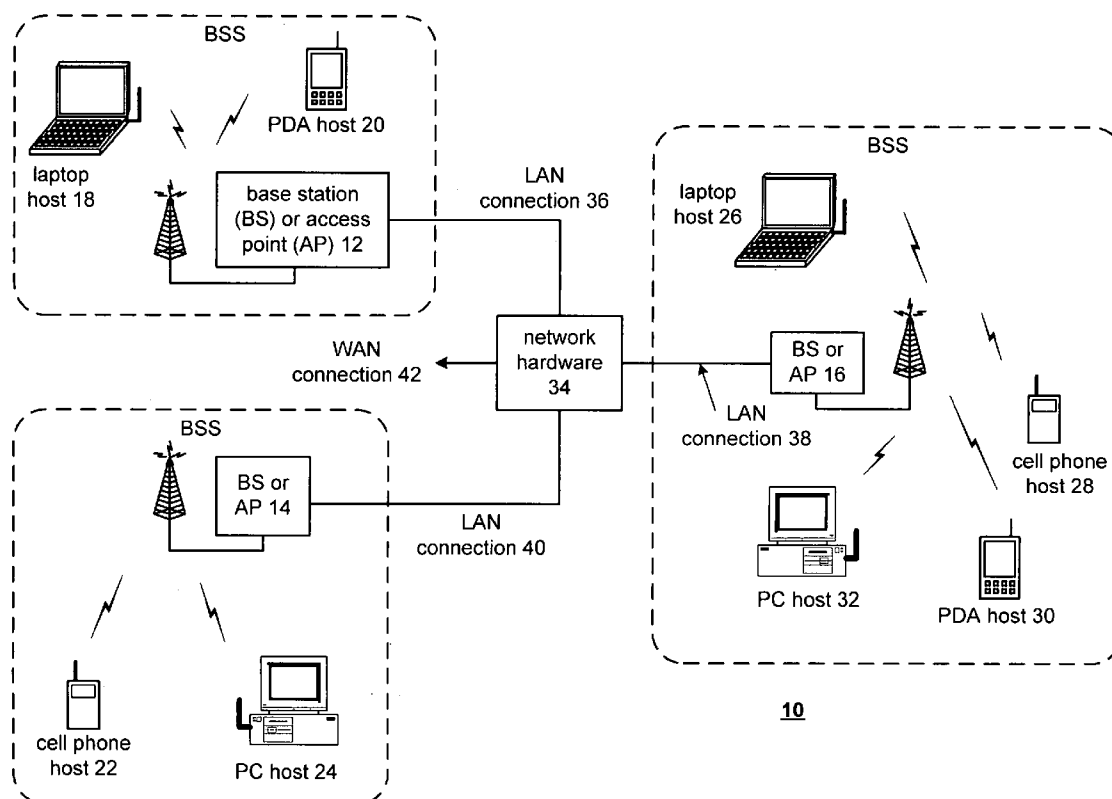

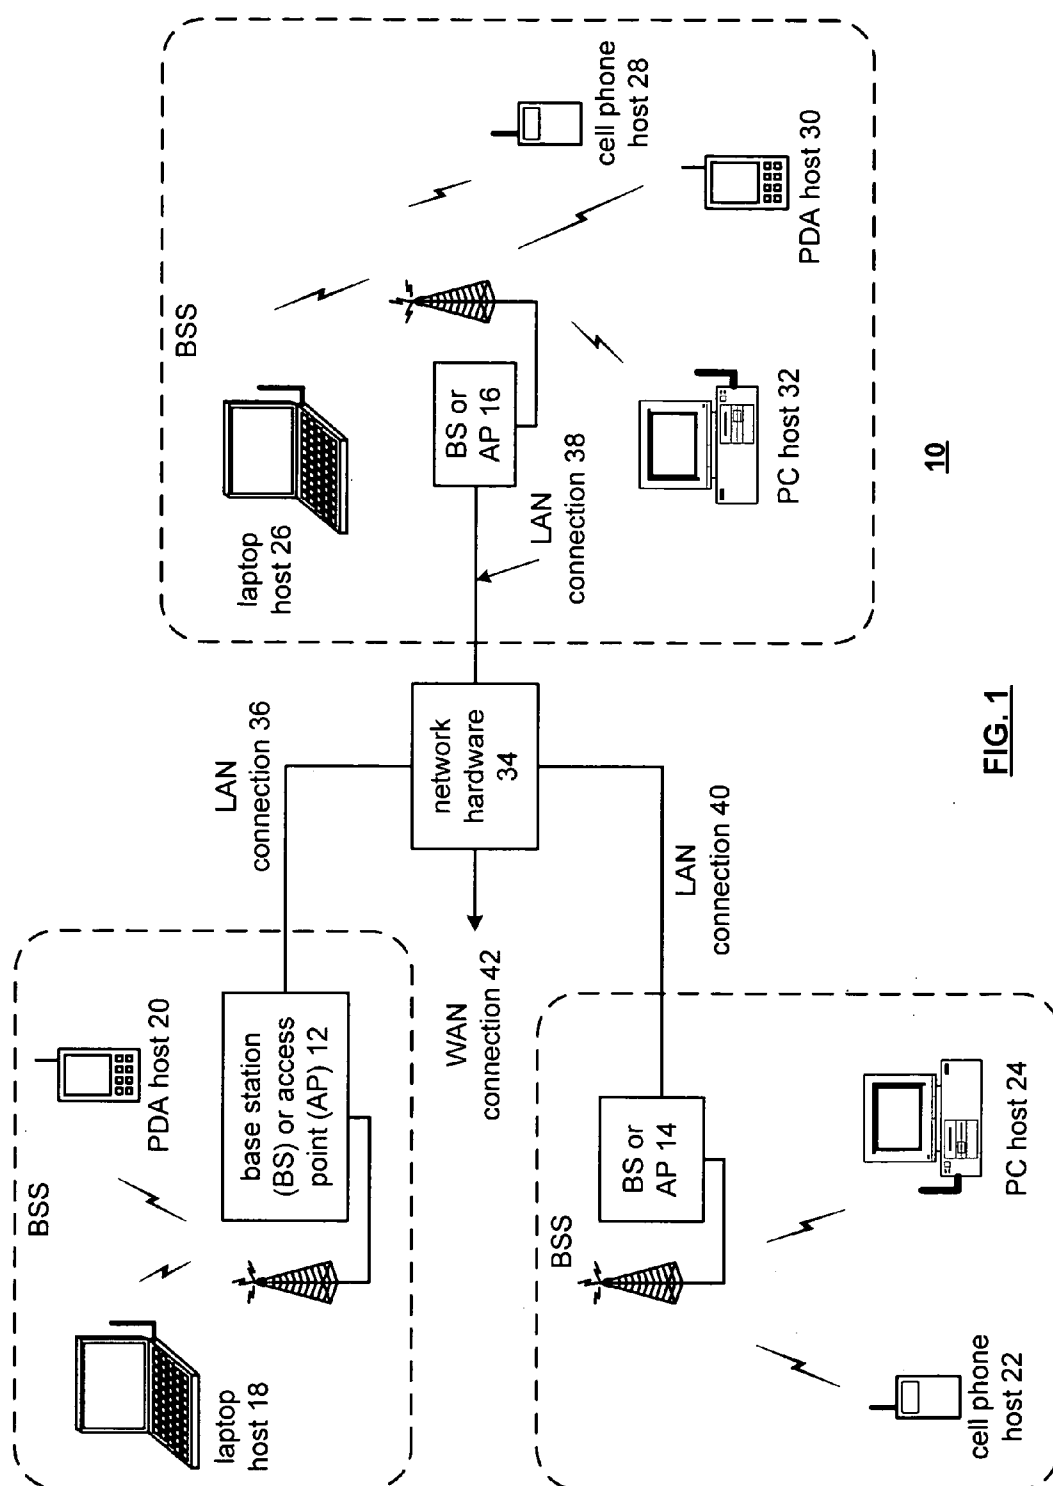


FIG. 1

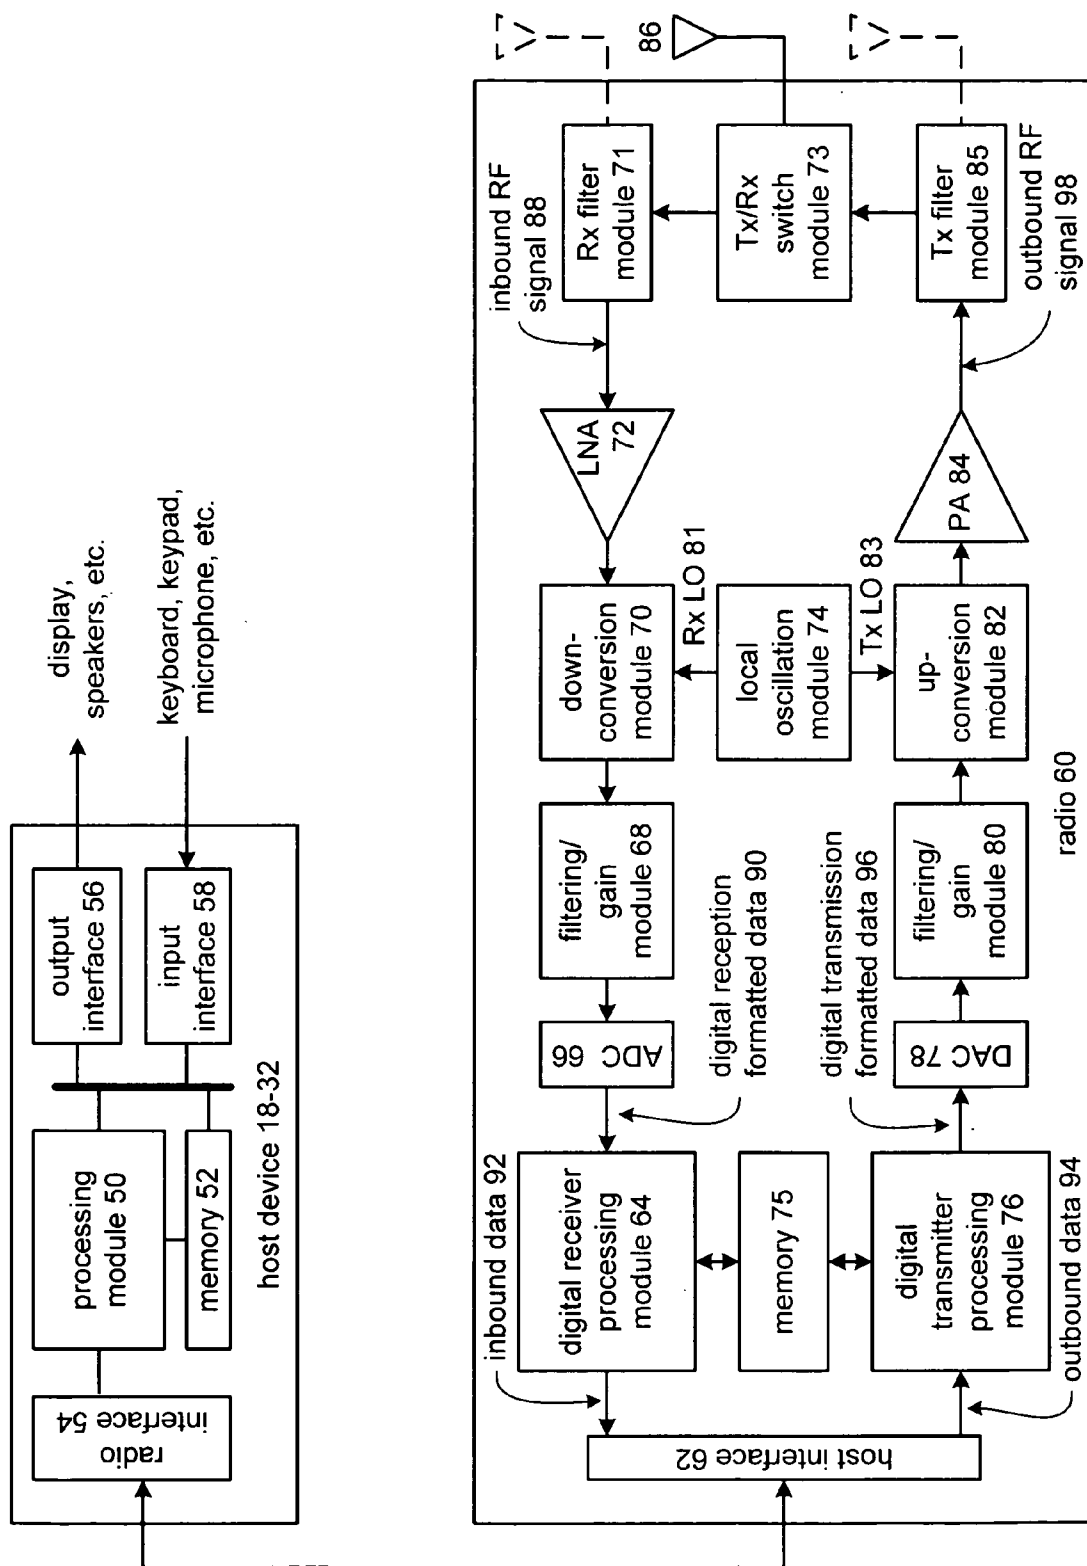


FIG. 2

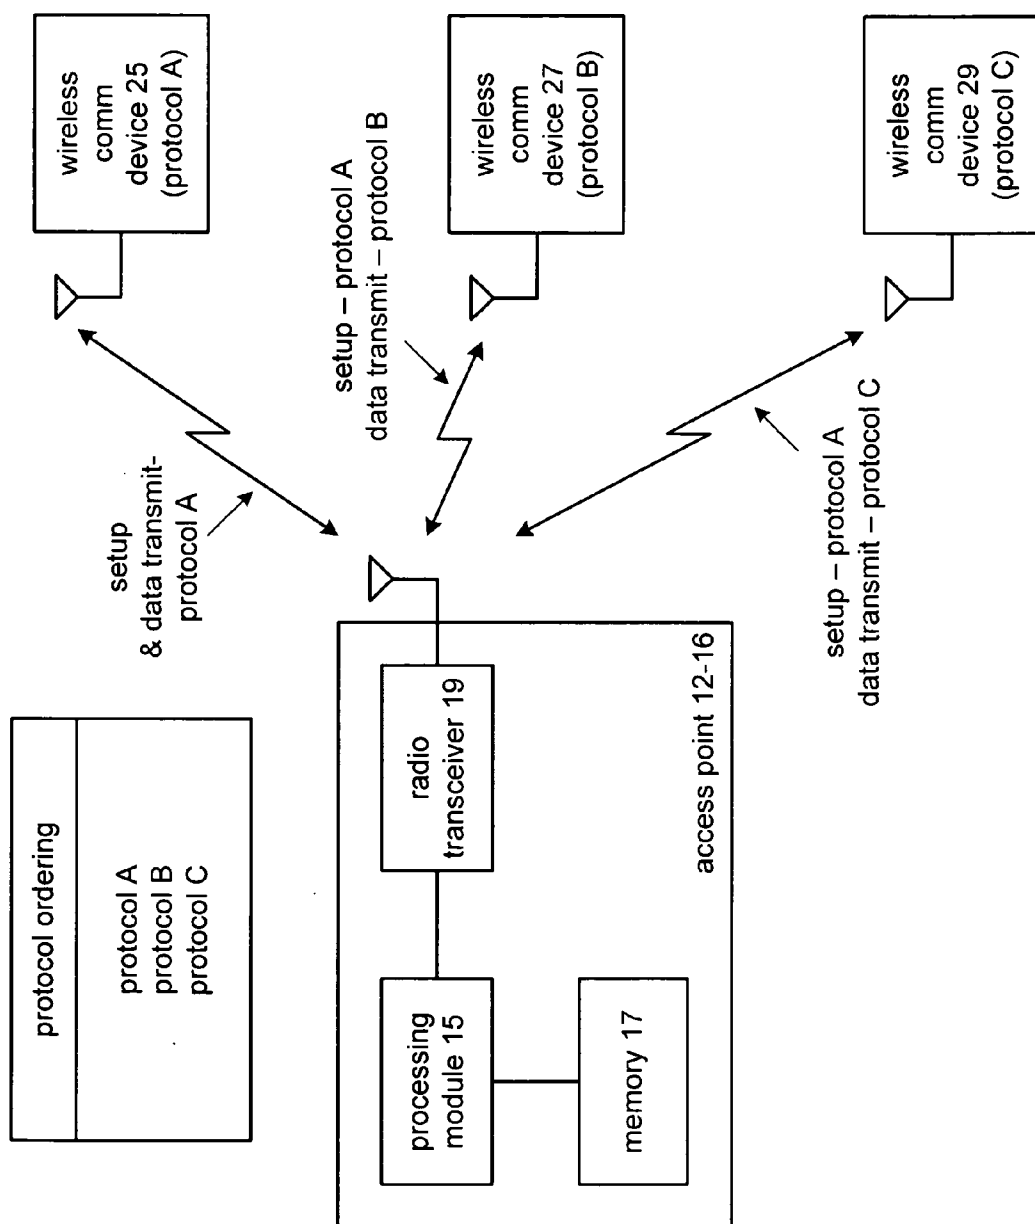


**FIG. 3**

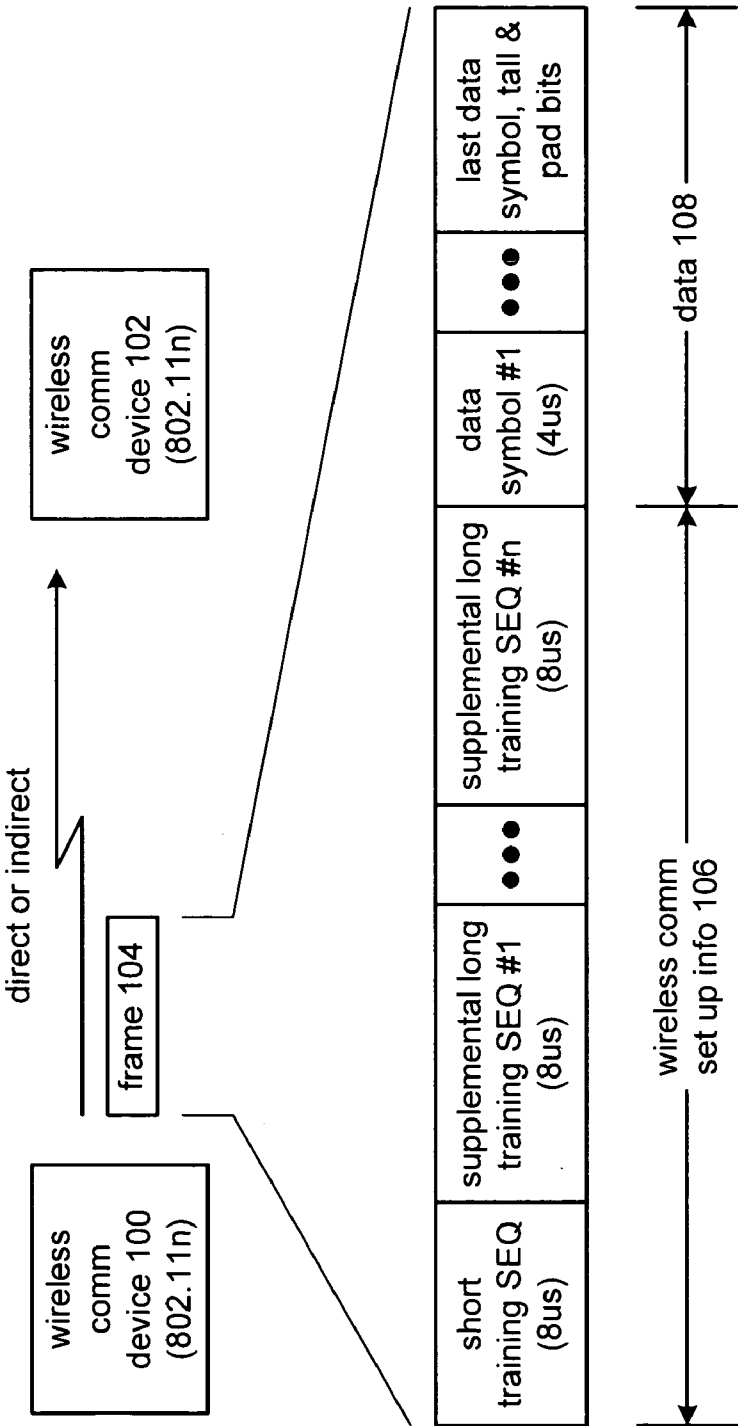


**FIG. 4**  
proximal area includes only 802.11n devices

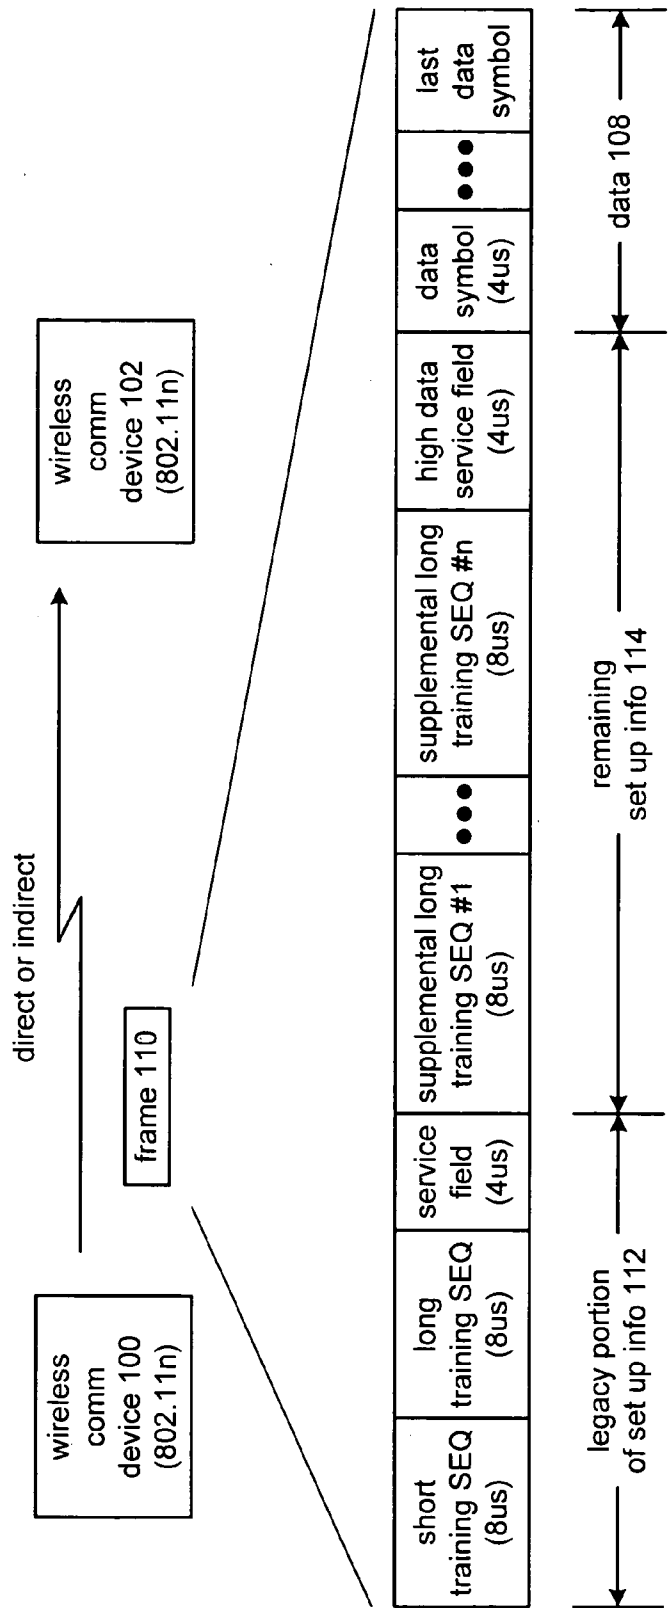


**FIG. 5**  
proximal area w/802.11n & 802.11a &/or 802.11g devices

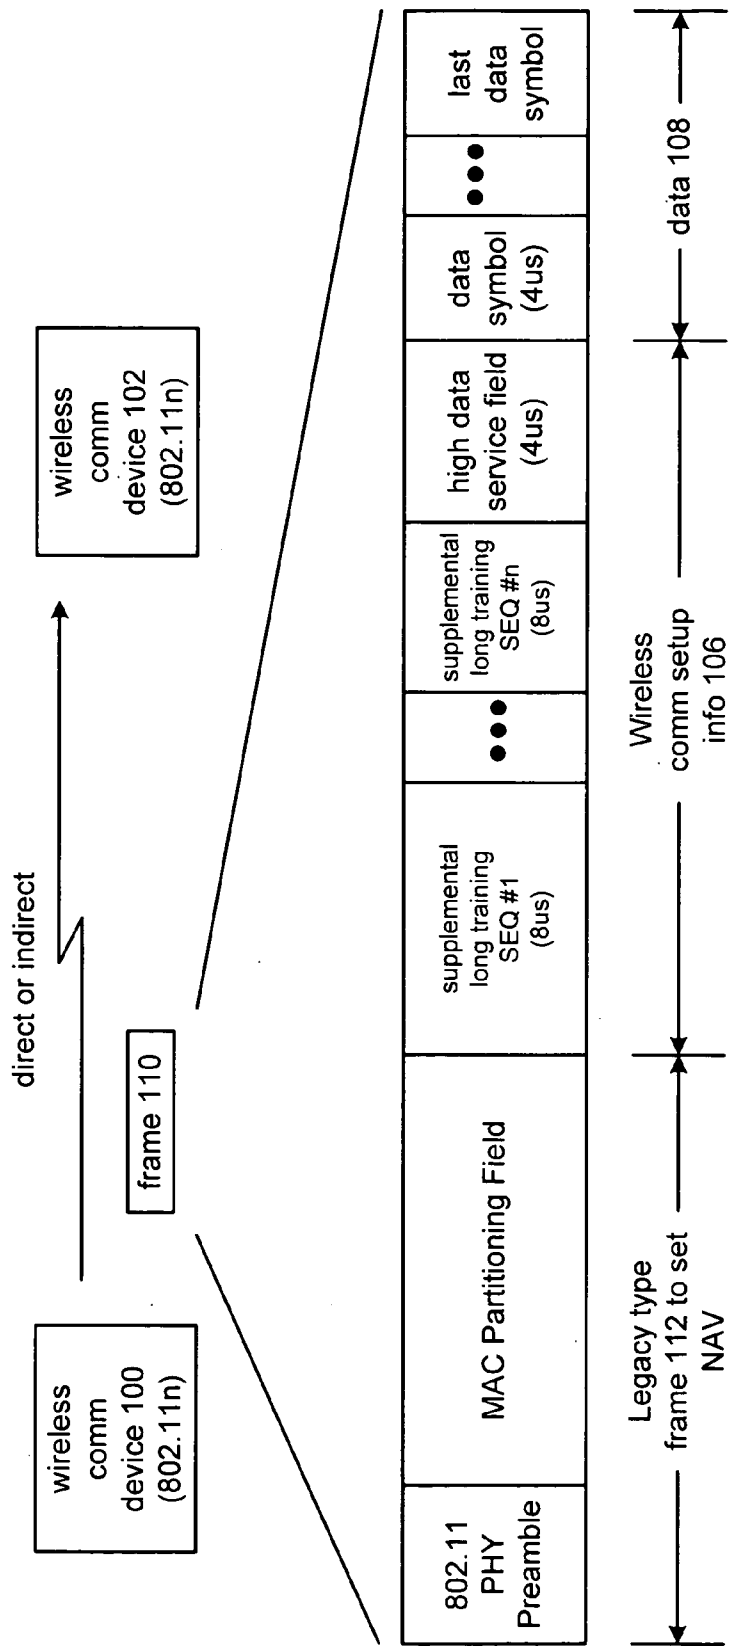


**FIG. 6**  
proximal area includes 802.11n & 802.11a, .11b &/or .11g devices

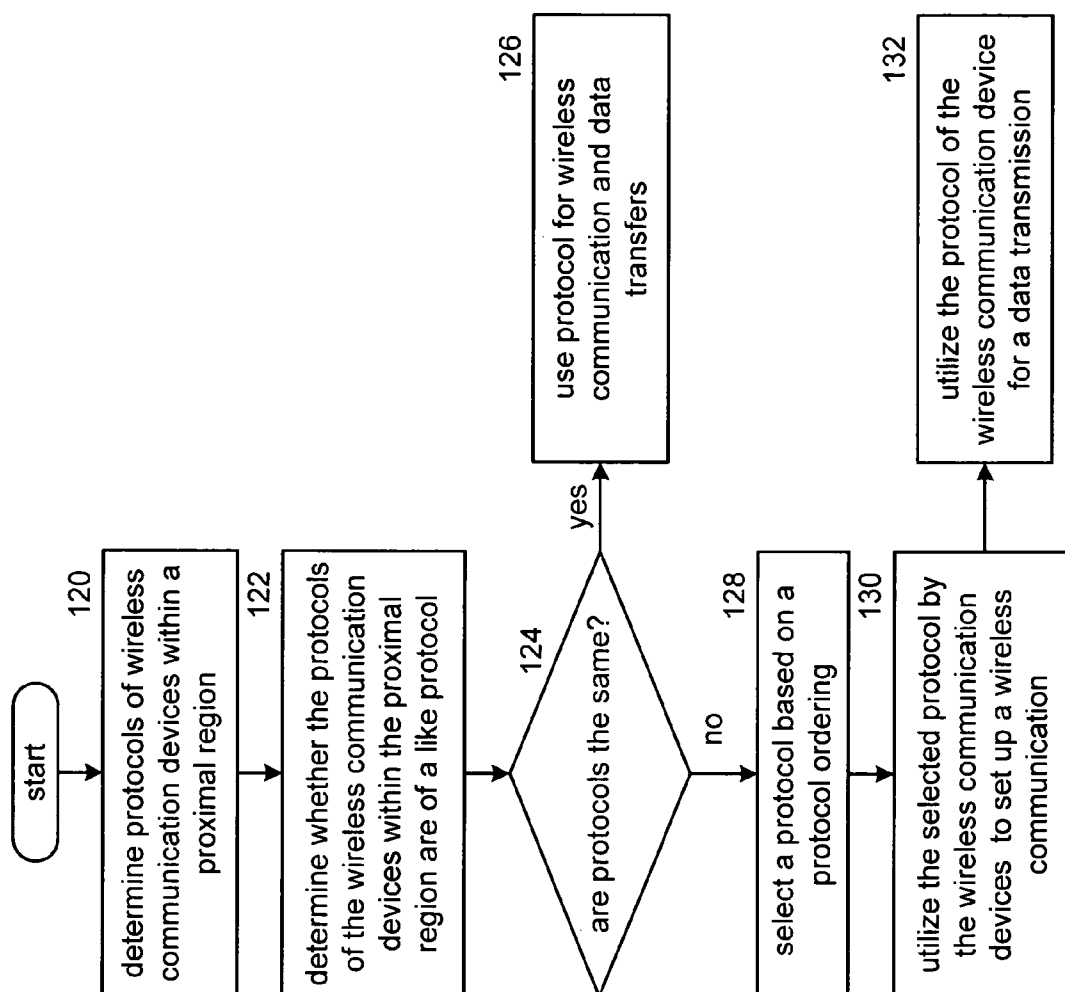


**FIG. 7**

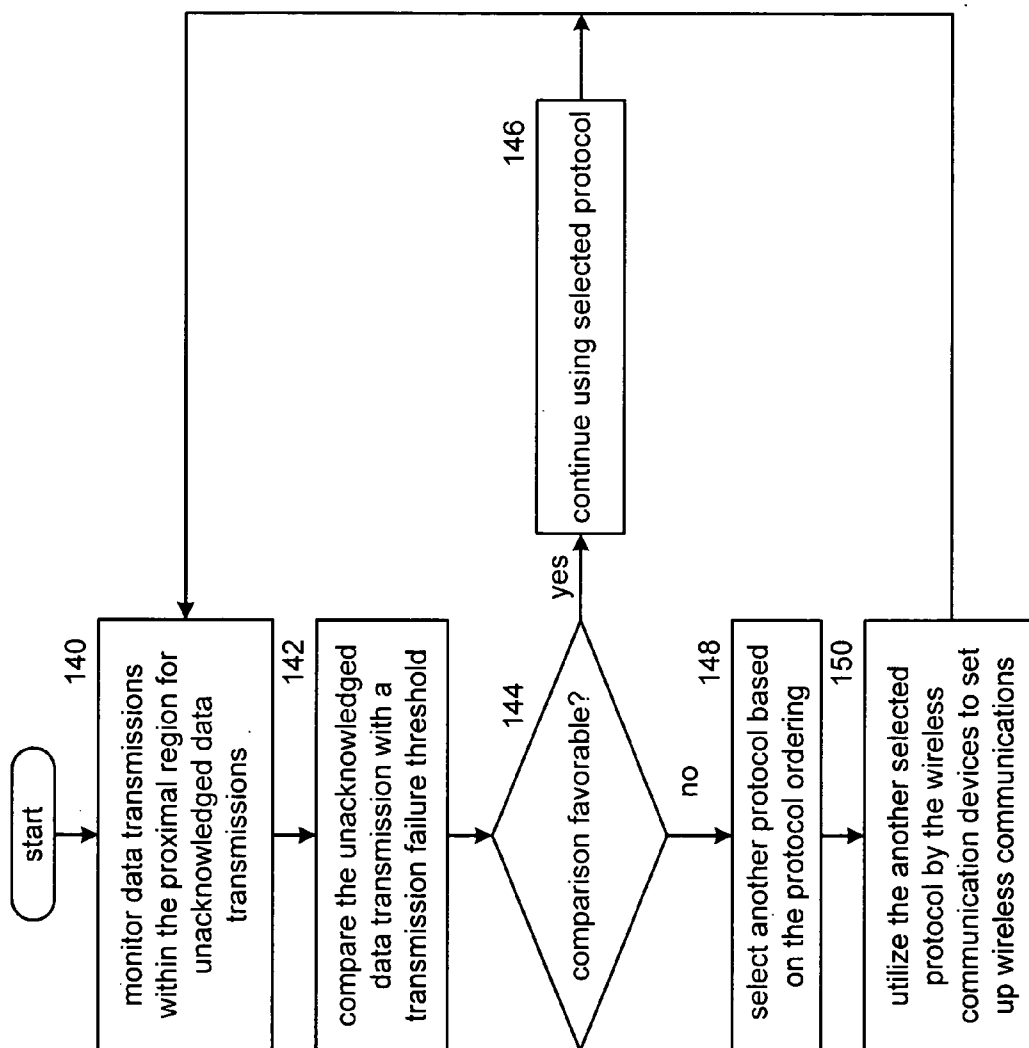


**FIG. 8**

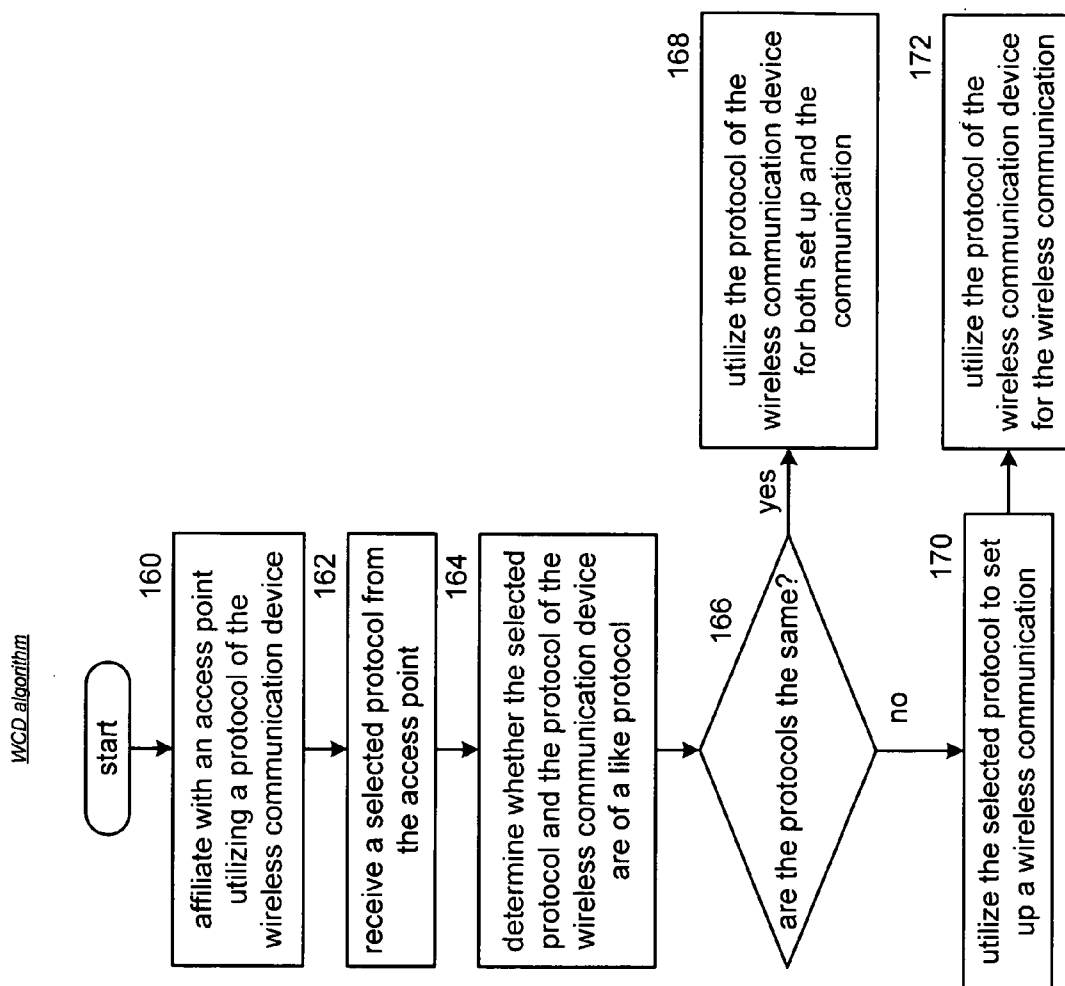


**FIG. 9**

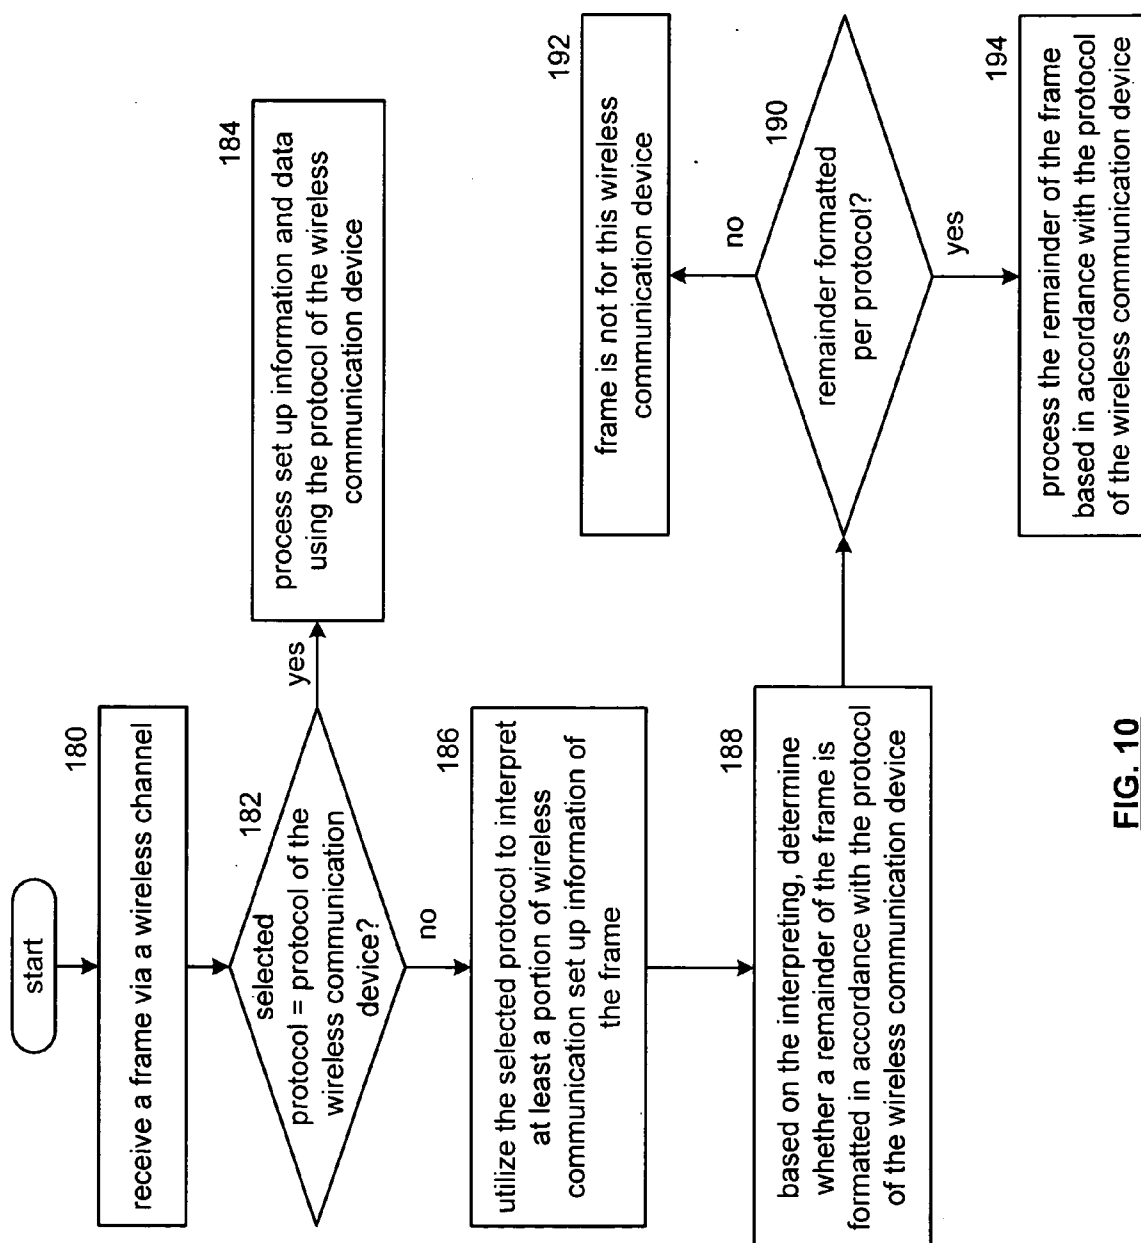


**FIG. 10**

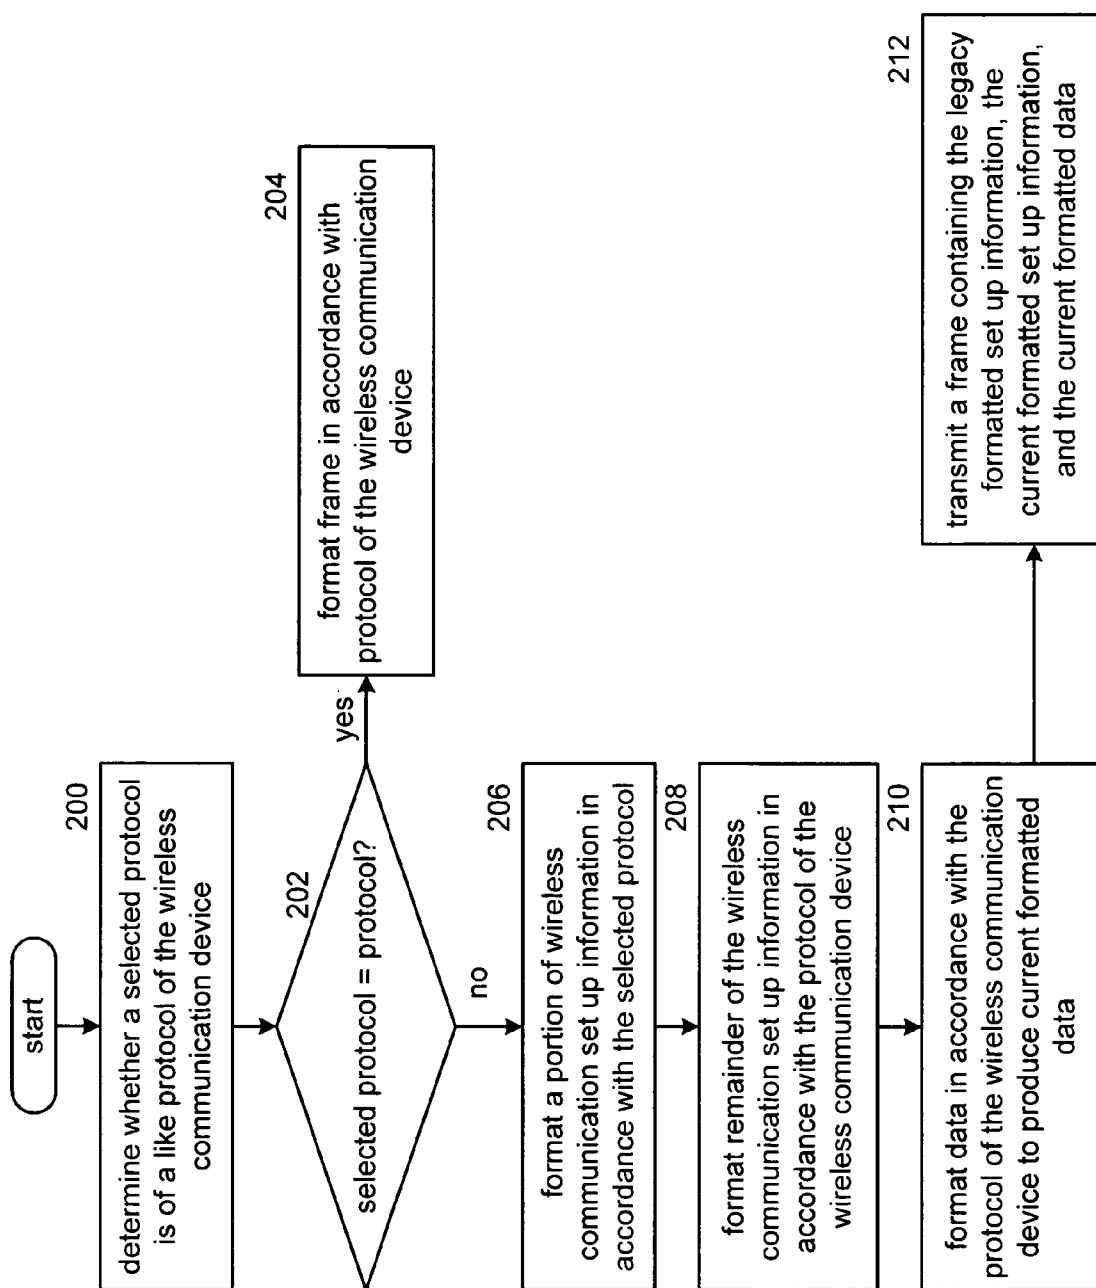


**FIG. 11**

## MULTIPLE PROTOCOL WIRELESS COMMUNICATIONS IN A WLAN

[0001] This invention is claiming priority under 35 USC § 119(e) to a provisionally filed patent application having the same title as the present patent application, a filing date of Feb. 13, 2004, and a Ser. No. 60/544,605.

### BACKGROUND OF THE INVENTION

#### [0002] 1. Technical Field of the Invention

[0003] This invention relates generally to wireless communication systems and more particularly to supporting multiple wireless communication protocols within a wireless local area network.

#### [0004] 2. Description of Related Art

[0005] Communication systems are known to support wireless and wire lined communications between wireless and/or wire lined communication devices. Such communication systems range from national and/or international cellular telephone systems to the Internet to point-to-point in-home wireless networks. Each type of communication system is constructed, and hence operates, in accordance with one or more communication standards. For instance, wireless communication systems may operate in accordance with one or more standards including, but not limited to, IEEE 802.11, Bluetooth, advanced mobile phone services (AMPS), digital AMPS, global system for mobile communications (GSM), code division multiple access (CDMA), local multi-point distribution systems (LMDS), multi-channel-multi-point distribution systems (MMDS), and/or variations thereof.

[0006] Depending on the type of wireless communication system, a wireless communication device, such as a cellular telephone, two-way radio, personal digital assistant (PDA), personal computer (PC), laptop computer, home entertainment equipment, et cetera communicates directly or indirectly with other wireless communication devices. For direct communications (also known as point-to-point communications), the participating wireless communication devices tune their receivers and transmitters to the same channel or channels (e.g., one of the plurality of radio frequency (RF) carriers of the wireless communication system) and communicate over that channel(s). For indirect wireless communications, each wireless communication device communicates directly with an associated base station (e.g., for cellular services) and/or an associated access point (e.g., for an in-home or in-building wireless network) via an assigned channel. To complete a communication connection between the wireless communication devices, the associated base stations and/or associated access points communicate with each other directly, via a system controller, via the public switch telephone network, via the Internet, and/or via some other wide area network.

[0007] For each wireless communication device to participate in wireless communications, it includes a built-in radio transceiver (i.e., receiver and transmitter) or is coupled to an associated radio transceiver (e.g., a station for in-home and/or in-building wireless communication networks, RF modem, etc.). As is known, the transmitter includes a data modulation stage, one or more intermediate frequency stages, and a power amplifier. The data modulation stage converts raw data into baseband signals in accordance with

a particular wireless communication standard. The one or more intermediate frequency stages mix the baseband signals with one or more local oscillations to produce RF signals. The power amplifier amplifies the RF signals prior to transmission via an antenna.

[0008] As is also known, the receiver is coupled to the antenna and includes a low noise amplifier, one or more intermediate frequency stages, a filtering stage, and a data recovery stage. The low noise amplifier receives inbound RF signals via the antenna and amplifies them. The one or more intermediate frequency stages mix the amplified RF signals with one or more local oscillations to convert the amplified RF signal into baseband signals or intermediate frequency (IF) signals. The filtering stage filters the baseband signals or the IF signals to attenuate unwanted out of band signals to produce filtered signals. The data recovery stage recovers raw data from the filtered signals in accordance with the particular wireless communication standard.

[0009] As is further known, the standard to which a wireless communication device is compliant within a wireless communication system may vary. For instance, as the IEEE 802.11 specification has evolved from IEEE 802.11 to IEEE 802.11b to IEEE 802.11a and to IEEE 802.11g, wireless communication devices that are compliant with IEEE 802.11b may exist in the same wireless local area network (WLAN) as IEEE 802.11g compliant wireless communication devices. As another example, IEEE 802.11a compliant wireless communication devices may reside in the same WLAN as IEEE 802.11g compliant wireless communication devices. When legacy devices (i.e., those compliant with an earlier version of a standard) reside in the same WLAN as devices compliant with later versions of the standard, a mechanism is employed to insure that legacy devices know when the newer version devices are utilizing the wireless channel as to avoid a collision.

[0010] For instance, backward compatibility with legacy devices has been enabled exclusively at either the physical (PHY) layer (in the case of IEEE 802.11b) or the Media-Specific Access Control (MAC) layer (in the case of 802.11g). At the PHY layer, backward compatibility is achieved by re-using the PHY preamble from a previous standard. In this instance, legacy devices will decode the preamble portion of all signals, which provides sufficient information for determining that the wireless channel is in use for a specific period of time, thereby avoid collisions even though the legacy devices cannot fully demodulate and/or decode the transmitted frame(s).

[0011] At the MAC layer, backward compatibility with legacy devices is enabled by forcing devices that are compliant with a newer version of the standard to transmit special frames using modes or data rates that are employed by legacy devices. For example, the newer devices may transmit Clear to Send/Ready to Send (CTS/RTS) exchange frames and/or CTS to self frames as are employed in IEEE 802.11g. These special frames contain information that sets the NAV (network allocation vector) of legacy devices such that these devices know when the wireless channel is in use by newer stations.

[0012] Both of the existing mechanisms for backward compatibility suffer from a performance loss relative to that which can be achieved without backward compatibility and are used independently of each other.

[0013] Therefore, a need exists for a method and apparatus that enables multiple protocols to be supported within a wireless communication system, including wireless local area networks.

#### BRIEF SUMMARY OF THE INVENTION

[0014] The multiple protocol wireless communications in a WLAN of present invention substantially meets these needs and others. In one embodiment, a method for multiple protocol wireless communications begins by determining protocols of wireless communication devices within a proximal region. The method then continues by determining whether the protocols of the wireless communication devices within the proximal region are of a like protocol. The method continues by, when the protocols of the wireless communication devices within the proximal region are not of a like protocol, selecting a protocol of the protocols of the wireless communication devices within the proximal region based on a protocol ordering to produce a selected protocol. The method continues by utilizing the selected protocol by the wireless communication devices within the proximal region to set up a wireless communication within the proximal region.

[0015] In another embodiment, a method for a wireless communication device to participate in multiple protocol wireless communications begins by affiliating with an access point utilizing a protocol of the wireless communication device. The method continues by receiving a selected protocol from the access point. The method continues by determining whether the selected protocol and the protocol of the wireless communication device are of a like protocol. The method continues by, when the selected protocol and the protocol of the wireless communication device are not of the like protocol, utilizing the selected protocol to set up a wireless communication and utilizing the protocol of the wireless communication device for the wireless communication.

[0016] In a further embodiment, a method for a wireless communication device to participate in multiple protocol wireless communications begins by receiving a frame via a wireless channel. The method continues by, when a selected protocol is not of a like protocol of the wireless communication device, utilizing the selected protocol to interpret at least a portion of wireless communication set up information of the frame. The method continues by, based on the interpreting of the at least a portion of the wireless communication set up information, determining whether a remainder of the frame is formatted in accordance with the protocol of the wireless communication device. The method continues by, when the remainder of the frame is formatted in accordance with the protocol of the wireless communication device, processing the remainder of the frame based in accordance with the protocol of the wireless communication device.

[0017] In yet another embodiment, a method for a wireless communication device to participate in multiple protocol wireless communications begins by determining whether a selected protocol is of a like protocol of the wireless communication device. The method continues by, when the selected protocol is not of the like protocol of the wireless communication device, formatting a portion of wireless communication set up information in accordance with the

selected protocol to produce legacy formatted set up information. The method continues by formatting remainder of the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information. The method continues by formatting data in accordance with the protocol of the wireless communication device to produce current formatted data. The method continues by transmitting a frame containing the legacy formatted set up information, the current formatted set up information, and the current formatted data.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0018] FIG. 1 is a schematic block diagram of a wireless communication system in accordance with the present invention;

[0019] FIG. 2 is a schematic block diagram of a wireless communication device in accordance with the present invention;

[0020] FIG. 3 is a schematic block diagram of an access point communicating with wireless communication devices in accordance with the present invention;

[0021] FIG. 4 is a diagram depicting one type of wireless communication in accordance with the present invention;

[0022] FIG. 5 is a diagram depicting another type of wireless communication in accordance with the present invention;

[0023] FIG. 6 is a diagram of yet another wireless communication in accordance with the present invention;

[0024] FIG. 7 is a logic diagram of a method for multiple protocol communications in accordance with the present invention;

[0025] FIG. 8 is a logic diagram of a method for monitoring success of wireless multiple protocol communications in accordance with the present invention;

[0026] FIG. 9 is a logic diagram of a method for a wireless communication device to participate in a multiple protocol communication in accordance with the present invention;

[0027] FIG. 10 is a logic diagram of another method for a wireless communication device to participate in a multiple protocol communication in accordance with the present invention; and

[0028] FIG. 11 is a logic diagram of yet another method for a wireless communication device to participate in a multiple protocol communication in accordance with the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0029] FIG. 1 is a schematic block diagram illustrating a communication system 10 that includes a plurality of base stations and/or access points 12-16, a plurality of wireless communication devices 18-32 and a network hardware component 34. The wireless communication devices 18-32 may be laptop host computers 18 and 26, personal digital assistant hosts 20 and 30, personal computer hosts 24 and 32 and/or cellular telephone hosts 22 and 28. The details of the

wireless communication devices will be described in greater detail with reference to **FIG. 2**.

[0030] The base stations or access points **12-16** are operably coupled to the network hardware **34** via local area network connections **36, 38** and **40**. The network hardware **34**, which may be a router, switch, bridge, modem, system controller, et cetera provides a wide area network connection **42** for the communication system **10**. Each of the base stations or access points **12-16** has an associated antenna or antenna array to communicate with the wireless communication devices in its regional area, which is generally referred to as a basic service set (BSS). Typically, the wireless communication devices register with a particular base station or access point **12-14** to receive services from the communication system **10**. For direct connections (i.e., point-to-point communications), wireless communication devices communicate directly via an allocated channel to produce an ad-hoc network.

[0031] Typically, base stations are used for cellular telephone systems and like-type systems, while access points are used for in-home or in-building wireless networks. Regardless of the particular type of communication system, each wireless communication device includes a built-in radio and/or is coupled to a radio. The radio includes a highly linear amplifier and/or programmable multi-stage amplifier as disclosed herein to enhance performance, reduce costs, reduce size, and/or enhance broadband applications.

[0032] **FIG. 2** is a schematic block diagram illustrating a wireless communication device that includes the host device **18-32** and an associated radio **60**. For cellular telephone hosts, the radio **60** is a built-in component. For personal digital assistants hosts, laptop hosts, and/or personal computer hosts, the radio **60** may be built-in or an externally coupled component.

[0033] As illustrated, the host device **18-32** includes a processing module **50**, memory **52**, radio interface **54**, input interface **58** and output interface **56**. The processing module **50** and memory **52** execute the corresponding instructions that are typically done by the host device. For example, for a cellular telephone host device, the processing module **50** performs the corresponding communication functions in accordance with a particular cellular telephone standard.

[0034] The radio interface **54** allows data to be received from and sent to the radio **60**. For data received from the radio **60** (e.g., inbound data), the radio interface **54** provides the data to the processing module **50** for further processing and/or routing to the output interface **56**. The output interface **56** provides connectivity to an output display device such as a display, monitor, speakers, et cetera such that the received data may be displayed. The radio interface **54** also provides data from the processing module **50** to the radio **60**. The processing module **50** may receive the outbound data from an input device such as a keyboard, keypad, microphone, et cetera via the input interface **58** or generate the data itself. For data received via the input interface **58**, the processing module **50** may perform a corresponding host function on the data and/or route it to the radio **60** via the radio interface **54**.

[0035] Radio **60** includes a host interface **62**, digital receiver processing module **64**, memory **75**, a digital trans-

mitter processing module **76**, and a radio transceiver. The radio transceiver includes an analog-to-digital converter **66**, a filtering/gain module **68**, an IF mixing down conversion stage **70**, a receiver filter **71**, a low noise amplifier **72**, a transmitter/receiver switch **73**, a local oscillation module **74**, a digital-to-analog converter **78**, a filtering/gain module **80**, an IF mixing up conversion stage **82**, a power amplifier **84**, a transmitter filter module **85**, and an antenna **86**. The antenna **86** may be a single antenna that is shared by the transmit and receive paths as regulated by the Tx/Rx switch **73**, or may include separate antennas for the transmit path and receive path. The antenna implementation will depend on the particular standard to which the wireless communication device is compliant.

[0036] The digital receiver processing module **64** and the digital transmitter processing module **76**, in combination with operational instructions stored in memory **75**, execute digital receiver functions and digital transmitter functions, respectively, in accordance with one or more wireless communication standards and as further function to implement one or more aspects of the functionality described with reference to **FIGS. 3-11**. The digital receiver functions include, but are not limited to, digital intermediate frequency to baseband conversion, demodulation, constellation demapping, decoding, and/or descrambling. The digital transmitter functions include, but are not limited to, scrambling, encoding, constellation mapping, modulation, and/or digital baseband to IF conversion. The digital receiver and transmitter processing modules **64** and **76** may be implemented using a shared processing device, individual processing devices, or a plurality of processing devices. Such a processing device may be a microprocessor, micro-controller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on operational instructions. The memory **75** may be a single memory device or a plurality of memory devices. Such a memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, and/or any device that stores digital information. Note that when the processing module **64** and/or **76** implements one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry, the memory storing the corresponding operational instructions is embedded with the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry.

[0037] In operation, the radio **60** receives outbound data **94** from the host device via the host interface **62**. The host interface **62** routes the outbound data **94** to the digital transmitter processing module **76**, which processes the outbound data **94** in accordance with a particular wireless communication standard (e.g., IEEE 802.11 and versions thereof, Bluetooth and versions thereof, et cetera) to produce digital transmission formatted data **96**. The digital transmission formatted data **96** will be a digital base-band signal or a digital low IF signal, where the low IF typically will be in the frequency range of one hundred kilohertz to a few megahertz.

[0038] The digital-to-analog converter **78** converts the digital transmission formatted data **96** from the digital domain to the analog domain. The filtering/gain module **80**

filters and/or adjusts the gain of the analog signal prior to providing it to the IF mixing stage **82**. The IF mixing stage **82** converts the analog baseband or low IF signal into an RF signal based on a transmitter local oscillation **83** provided by local oscillation module **74**. The power amplifier **84** amplifies the RF signal to produce outbound RF signal **98**, which is filtered by the transmitter filter module **85**. The antenna **86** transmits the outbound RF signal **98** to a targeted device such as a base station, an access point and/or another wireless communication device.

[0039] The radio **60** also receives an inbound RF signal **88** via the antenna **86**, which was transmitted by a base station, an access point, or another wireless communication device. The antenna **86** provides the inbound RF signal **88** to the receiver filter module **71** via the Tx/Rx switch **73**, where the Rx filter **71** bandpass filters the inbound RF signal **88**. The Rx filter **71** provides the filtered RF signal to low noise amplifier **72**, which amplifies the signal **88** to produce an amplified inbound RF signal. The low noise amplifier **72** provides the amplified inbound RF signal to the IF mixing module **70**, which directly converts the amplified inbound RF signal into an inbound low IF signal or baseband signal based on a receiver local oscillation **81** provided by local oscillation module **74**. The down conversion module **70** provides the inbound low IF signal or baseband signal to the filtering/gain module **68**. The filtering/gain module **68** filters and/or gains the inbound low IF signal or the inbound baseband signal to produce a filtered inbound signal.

[0040] The analog-to-digital converter **66** converts the filtered inbound signal from the analog domain to the digital domain to produce digital reception formatted data **90**. The digital receiver processing module **64** decodes, descrambles, demaps, and/or demodulates the digital reception formatted data **90** to recapture inbound data **92** in accordance with the particular wireless communication standard being implemented by radio **60**. The host interface **62** provides the recaptured inbound data **92** to the host device **18-32** via the radio interface **54**.

[0041] As one of average skill in the art will appreciate, the wireless communication device of FIG. 2 may be implemented using one or more integrated circuits. For example, the host device may be implemented on one integrated circuit, the digital receiver processing module **64**, the digital transmitter processing module **76** and memory **75** may be implemented on a second integrated circuit, and the remaining components of the radio **60**, less the antenna **86**, may be implemented on a third integrated circuit. As an alternate example, the radio **60** may be implemented on a single integrated circuit. As yet another example, the processing module **50** of the host device and the digital receiver and transmitter processing modules **64** and **76** may be a common processing device implemented on a single integrated circuit. Further, the memory **52** and memory **75** may be implemented on a single integrated circuit and/or on the same integrated circuit as the common processing modules of processing module **50** and the digital receiver and transmitter processing module **64** and **76**.

[0042] FIG. 3 is a schematic block diagram of an access point **12-16** communicating with wireless communication devices **25**, **27** and/or **29**. The wireless communication devices **25**, **27** and/or **29** may be any one of the devices **18-32** illustrated in FIG. 1 and discussed in detail in FIG.

2. In this illustration, access point **12-16** includes a processing module **15**, memory **17** and a radio transceiver **19**. The radio transceiver **19** may be similar to the radio transceiver of each wireless communication device in architecture and may include a plurality of antennas, transmit paths and receive paths for multiple wireless communications within a proximal region or basic service set. The processing module **15** may be a single processing device or a plurality of processing devices. Such a processing device may be a microprocessor, micro-controller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on operational instructions. The memory **17** may be a single memory device or a plurality of memory devices. Such a memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, cache memory, and/or any device that stores digital information. Note that when the processing module **15** implements one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry, the memory storing the corresponding operational instructions may be embedded within, or external to, the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry. The memory **17** stores, and the processing module **15** executes, operational instructions corresponding to at least some of the steps and/or functions illustrated in FIGS. 3-11.

[0043] In this illustration, each of the wireless communication devices **25**, **27** and **29** utilize a different wireless communication protocol. As illustrated, wireless communication device **25** utilizes protocol A, wireless communication device **27** utilizes protocol B and wireless communication device **29** utilizes protocol C. For example, protocols A, B and C may correspond to different versions of the IEEE 802.11 standard. In particular, protocol A may correspond to IEEE 802.11b, protocol B may correspond to IEEE 802.11g and protocol C may correspond to IEEE 802.11n.

[0044] FIG. 3 further illustrates a protocol ordering table that has protocol A, protocol B and protocol C listed in order. The ordering may be based on the legacy of each of the corresponding protocols where the first protocol in the ordering is the oldest standard and the last entry in the protocol ordering is the most current standard. For example, in this present illustration protocol A may correspond to IEEE 802.11b, protocol B may correspond to IEEE 802.11g and protocol C may correspond to IEEE 802.11n. Alternatively, the protocol ordering may be based on a user defined and/or system administrator defined procedure. For instance, if an unacceptable number of transmission errors occur due to non-recognition of frames while utilizing protocol A to set-up wireless communications, the user may select the protocol B format for setting up a wireless communication. This concept will be described in greater detail with reference to the remaining figures.

[0045] In operation, the access point **12-16**, and/or each of the wireless communication devices **25**, **27** and **29**, determine the protocol utilized by each of the wireless communication devices within the proximal region. Recall that the proximal region may include a basic service set and/or neighboring basic service sets and/or a direct, or ad-hoc

network wherein the wireless communication devices communicate directly. Once the protocol of each of the wireless communication devices has been determined, the access point **12-16** and/or the wireless communication devices **25-29** determine, based on the protocol ordering, which protocol will be utilized to set-up a wireless communication. For instance, if protocol A corresponds to IEEE 802.11b, the communication devices will utilize a MAC level protection mechanism to set-up a wireless communication, as will be further described with reference to **FIG. 6**. As such, each of the wireless communication devices will utilize protocol A to set-up, or establish, a wireless communication such that the legacy devices recognize that a wireless communication is being set-up and also recognizes the duration of that wireless communication such that it will not transmit during that time, thus avoiding a collision.

[0046] Once the wireless communication is established, or set-up, utilizing a selected protocol (e.g., protocol A) from the protocol ordering, the communication device then utilizes its protocol to transmit the data for the remainder of the wireless communication. For example, wireless communication device **25** will utilize protocol A to establish and to transmit data for a wireless communication. Wireless communication device **27** will utilize protocol A to set-up a wireless communication and then use protocol B for the corresponding data transmission of the wireless communication. Similarly, wireless communication device **29** will utilize protocol A to establish, or set-up, the wireless communication and then use protocol C for the data transmission portion of the wireless communication.

[0047] As one of average skill in the art will appreciate, if the proximal region only includes wireless communication devices that utilize the same protocol, the set-up and data transmission is done using that protocol. As one of average skill in the art will further appreciate, if only two different protocols are present within the proximal region, the legacy protocol will be selected as the set-up protocol.

[0048] **FIG. 4** is a diagram depicting a wireless communication between two wireless communication devices **100** and **102** that are in a proximal region where the only protocol that is used is IEEE 802.11n. The wireless communication may be direct (i.e., from wireless communication device to wireless communication device), or indirect (i.e., from a wireless communication device to an access point to a wireless communication device). In this example, wireless communication device **100** is providing frame **104** to wireless communication device **102**. The frame **104** includes a wireless communication set-up information field **106** and a data portion **108**. The wireless communication set-up information portion **106** includes a short training sequence that may be 8 microseconds long, a 1<sup>st</sup> supplemental long training sequence that may be 8 microseconds long, which is one of a plurality of supplemental long training sequences. Note that the number of supplemental long training sequences will correspond to the number of transmit antennas being utilized for multiple input multiple output radio communications.

[0049] The data portion of the frame **104** includes a plurality of data symbols each being 4 microseconds in duration. The last data symbol also includes a tail bits and padding bits as needed.

[0050] **FIG. 5** is a diagram of a wireless communication between two wireless communication devices **100** and **102**,

each of which is compliant with IEEE 802.11n. Such a communication is taking place within a proximal area that includes 802.11n compliant devices, 802.11a compliant devices and/or 802.11g compliant devices. In this instance, the wireless communication may be direct or indirect where a frame **110** includes a legacy portion of the set-up information **112**, remaining set-up information portion **114**, and the data portion **108**.

[0051] The legacy portion of the set-up information **112** includes a short training sequence, which is 8 microseconds in duration, a long training sequence, which is 8 microseconds in duration, and a service field, which is 4 microseconds in duration. The service field, as is known, includes several bits to indicate the duration of the frame **110**. As such, the IEEE 802.11a compliant devices within the proximal area and the 802.11g compliant devices within the proximal area will recognize that a frame is being transmitted even though such devices will not be able to interpret the remaining portion of the frame. In this instance, the legacy devices (IEEE 802.11a and IEEE 802.11g) will avoid a collision with the IEEE 802.11n communication based on a proper interpretation of the legacy portion of the set-up information **112**.

[0052] The remaining set-up information **114** includes additional supplemental long training sequences, which are each 8 microseconds in duration. The remaining set-up information further includes a high data service field, which is 4 microseconds in duration to provide additional information regarding the frame. The data portion **108** includes the data symbols, which are 4 microseconds in duration as previously described with reference to **FIG. 3**. In this instance, the legacy protection is provided at the physical layer.

[0053] **FIG. 6** is a diagram of a wireless communication between two wireless communication devices **100** and **102** that are both IEEE 802.11n compliant. The wireless communication may be direct or indirect within a proximal area that includes IEEE 802.11 compliant devices, IEEE 802.11a, 802.11b and/or 802.11g devices. In this instance, the frame includes a legacy portion of the set-up information **112**, remaining set-up information **114** and the data portion **108**. As shown, the legacy portion of the set-up information **112**, or legacy frame, includes an IEEE 802.11 PHY preamble and a MAC partitioning frame portion, which indicates the particulars of this particular frame that may be interpreted by legacy devices. In this instance, the legacy protection is provided at the MAC layer.

[0054] The remaining set-up information **114** includes a plurality of supplemental long training sequences and the high data service field. The data portion **108** includes a plurality of data symbols as previously described.

[0055] **FIG. 7** is a method for multiple protocol wireless communications in a WLAN. The method begins at step **120**, where an access point (for indirect wireless communications) or a wireless communication device (for direct wireless communications), determines protocols of wireless communication devices within a proximal region. In an embodiment, the protocols may be determined based on frequency band of use and wireless local area network communication format of each of the wireless communication devices. For example, if the frequency band is 2.4 GHz, a device may have a WLAN communication format in

accordance with IEEE 802.11b, IEEE 802.11g, and/or IEEE 802.11n. If the frequency band is 4.9-5.85 GHz, a device may have a WLAN communication format in accordance with IEEE 802.11a or IEEE 802.11n. Further, the proximal region includes coverage area of a basic service set, coverage area of an ad-hoc network, and/or coverage area of the basic service set and at least a portion of at least one neighboring basic service set. With reference to FIG. 1, neighboring BSS of access point 12 include the BSS of access point 14 and/or the BSS of access point 16.

[0056] Returning to the logic diagram of FIG. 7, the process continues at step 122 where the access point and/or the wireless communication device determines whether the protocols of the wireless communication devices within the proximal region are of a like protocol. The process then proceeds to step 124 where the process branches depending on whether the protocols of the wireless communication devices within the proximal region are of a like protocol. When the wireless communication devices within the proximal region all use the same protocol, the process proceeds to step 126 where the wireless communication devices use their protocol for setting up a wireless communication and for the wireless communication.

[0057] If, however, at least one wireless communication device has a different protocol, the process proceeds to step 128 where the access point or a wireless communication device selects a protocol of the protocols of the wireless communication devices within the proximal region based on a protocol ordering to produce a selected protocol. The protocol ordering may be an ordering of the protocols based on legacy ordering of wireless communication devices and/or an ordering of the protocols based on a transmission efficiency ordering of the protocols. For example, IEEE 802.11, IEEE 802.11b, IEEE 802.11g, and IEEE 802.11n compliant devices operate in the 2.4 GHz frequency band and IEEE 802.11a and IEEE 802.11n compliant devices operate in the 4.9-5.85 GHz frequency band. Thus, in the 2.4 GHz frequency band, if 802.11b stations are present with 802.11n device, MAC level protection mechanisms, such as those defined in 802.11g, and as shown in FIG. 6, may be used. However, if the only legacy 802.11g devices are present with 802.11n devices, then either MAC level (e.g., FIG. 6) or PHY level (e.g., FIG. 5) protection mechanisms may be used. In the 4.9-5.85 GHz frequency band, if 802.11a devices are present with 802.11n devices, the MAC level protection mechanism or the PHY level protection mechanism may be used.

[0058] As one of average skill in the art will appreciate, it may be more desirable to use a PHY level protection mechanism, than a MAC level protection mechanism because the throughput impact will be less since the additional frames of the MAC level protection are not needed. Thus, when possible, the PHY mechanism should be employed first. If the PHY mechanism does not work well, as measured by the number of unacknowledged frames exceeding a threshold, then the MAC level mechanism should be employed.

[0059] As one of average skill in the art will further appreciate, the legacy status and required use of protection mechanisms can be enabled in the ERP Information Element of the beacon frame (and probe response frame). Currently 802.11g uses bits 0 to indicate Non-ERP (i.e. 11b) present

and bit 1 to force stations to Use Protection (MAC level). This can be extended to used the reserved bits (3 through 7) to indicate legacy status of 0.11g or 0.11a stations. In one embodiment, bit 3 may be used to indicated "Legacy OFDM present". The bits would then be interpreted as follows:

| Bit 0 - Non<br>ERP Present | Bit 1 - Use<br>Protection | Bit 3 - Legacy<br>OFDM Present | Action for 802.11n                      |
|----------------------------|---------------------------|--------------------------------|-----------------------------------------|
| 0                          | 0                         | 0                              | Use .11n frames                         |
| 1                          | 1                         | 0                              | Use MAC protection                      |
| 1                          | 1                         | 1                              | Use MAC protection                      |
| 0                          | 1                         | 1                              | Use PHY or MAC<br>protection            |
| 0                          | 0                         | 1                              | Optionally use PHY<br>or MAC Protection |

[0060] For 0.11n the MAC level protection mechanisms are the same as for 0.11g. Stations should either use CTS to self or a CTS/RTS exchange to set the NAV (network allocation vector) of legacy stations.

[0061] Returning the logic diagram of FIG. 7, the processing continues at step 130 where the wireless communication device utilizes the selected protocol within the proximal region to set up a wireless communication within the proximal region. This was illustrated in FIGS. 3-6. The process then proceeds to step 132 where the wireless communication device uses its protocol for a data transmission of the wireless communication.

[0062] FIG. 8 is a logic diagram of method for determining whether the selected protocol should be changed. The processing begins at step 140 where the access point and/or the wireless communication devices, monitors data transmissions within the proximal region for unacknowledged data transmissions. The process proceeds to step 142 where the access point and/or the wireless communication device compares the unacknowledged data transmission with a transmission failure threshold (e.g., up to 5%). If the comparison is favorable, the process proceeds to step 146 where the selected protocol remains unchanged and the process repeats at step 140.

[0063] If, however, the comparison at step 144 was unfavorable, the process proceeds to step 148 where the access point and/or the wireless communication device selects another one of the protocols of the wireless communication devices within the proximal region based on the protocol ordering to produce another selected protocol. For example, the MAC layer protection mechanism may be selected to replace the PHY layer protection mechanism when too many transmission failures occur. The process then proceeds to step 150 where the wireless communication devices uses the another selected protocol within the proximal region to set up the wireless communication within the proximal region.

[0064] FIG. 9 is a logic diagram of a method for a wireless communication device to participate in multiple protocol wireless communications. The process begins at step 160 where the wireless communication device affiliates with an access point utilizing a protocol (e.g., IEEE 802.11n) of the wireless communication device. The process then proceeds to step 162 where the wireless communication device receives a selected protocol from the access point. Note that

the selected protocol and the protocol of the wireless communication device may be a wireless local area network communication formats in accordance with IEEE 802.11, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and/or further versions of the IEEE 802.11. Further note that the selected protocol includes a first frame format that includes a legacy header and a Media-Specific Access Control (MAC) layer partitioning field, a second frame format that includes a physical (PHY) layer backward compatible header, and/or a third frame format that includes a current version header and the MAC layer partitioning field.

[0065] The process then proceeds to step 164 where the wireless communication device determines whether the selected protocol and the protocol of the wireless communication device are of a like protocol. The process branches at step 166 to step 168 when the protocols are the same and to step 170 when the protocols are not the same. At step 168, the wireless communication device utilizes the protocol to set up a wireless communication and to transfer data. At step 170, the wireless communication device utilizes the selected protocol to set up a wireless communication. The process then proceeds to step 172 where the wireless communication device utilizes the protocol of the wireless communication device for the wireless communication.

[0066] FIG. 10 is a logic diagram of a method for a wireless communication device to participate in multiple protocol wireless communications. The process begins at step 180 where the wireless communication device receives a frame via a wireless channel. The process then proceeds to step 182 where the wireless communication device determines whether a selected protocol is not of a like protocol of the wireless communication device. When the selected protocol is the same as the protocol of the wireless communication device, the process proceeds to step 184 where the wireless communication device uses its protocol to set up a wireless communication and to transmit data.

[0067] If, however, the selected protocol is not the same as the protocol of the wireless communication device, the process proceeds to step 186 where the wireless communication device uses the selected protocol to interpret at least a portion of wireless communication set up information of the frame. In one embodiment, the wireless communication device may interpret the set up information by interpreting a header of the frame for conformity with a legacy physical layer format to provide the interpreting of the at least a portion of the wireless communication set up information and, when the header of the frame does not conform with the legacy physical layer format, determining that the remainder of the frame is formatted in accordance with the protocol of the wireless communication device. Note that the legacy physical layer format includes at least one of IEEE 802.11a and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11n.

[0068] In another embodiment, the wireless communication device may interpret the set up information by interpreting the frame for conformity with a legacy Media-Specific Access Control (MAC) layer format to provide the interpreting of the at least a portion of the wireless communication set up information and, when the header of the frame does not conform with the legacy MAC layer format, determining that the remainder of the frame is formatted in

accordance with the protocol of the wireless communication device. Note that the legacy physical layer format includes at least one of IEEE 802.11a, IEEE 802.11b, and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11n.

[0069] The process then proceeds to step 188 where the wireless communication device, based on the interpreting of the at least a portion of the wireless communication set up information, determines whether a remainder of the frame is formatted in accordance with the protocol of the wireless communication device. The process then branches at step 190 to step 194 when the remainder of the frame is formatted in accordance with the protocol of the wireless communication device and to step 192 when it does not. At step 192 the wireless communication device ignores the frame. At step 194, the wireless communication device processes the remainder of the frame based in accordance with the protocol of the wireless communication device.

[0070] FIG. 11 is a logic diagram of a method for a wireless communication device to participate in multiple protocol wireless communications. The method begins at step 200 where the wireless communication device determines whether a selected protocol is of a like protocol of the wireless communication device. The process branches at step 202 to step 204 when the selected protocol is the protocol of the wireless communication device and to step 206 when the protocols differ. At step 204, the wireless communication device formats the set up information portion of a frame and a data portion of the frame in accordance with its protocol. The wireless communication device then transmits the frame.

[0071] If, however, the selected protocol is not of the like protocol of the wireless communication device, the process proceeds to step 206 where the wireless communication device formats a portion of wireless communication set up information in accordance with the selected protocol to produce legacy formatted set up information. The process then proceeds to step 208 where the wireless communication device formats remainder of the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information. The process then proceeds to step 210 where the wireless communication device formats data in accordance with the protocol of the wireless communication device to produce current formatted data. Refer to FIGS. 3-6 for examples of such formatting. The process then proceeds to step 212 where the wireless communication device transmits a frame containing the legacy formatted set up information, the current formatted set up information, and the current formatted data.

[0072] As one of average skill in the art will appreciate, the term "substantially" or "approximately", as may be used herein, provides an industry-accepted tolerance to its corresponding term. Such an industry-accepted tolerance ranges from less than one percent to twenty percent and corresponds to, but is not limited to, component values, integrated circuit process variations, temperature variations, rise and fall times, and/or thermal noise. As one of average skill in the art will further appreciate, the term "operably coupled", as may be used herein, includes direct coupling and indirect coupling via another component, element, circuit, or module where, for indirect coupling, the intervening component,

element, circuit, or module does not modify the information of a signal but may adjust its current level, voltage level, and/or power level. As one of average skill in the art will also appreciate, inferred coupling (i.e., where one element is coupled to another element by inference) includes direct and indirect coupling between two elements in the same manner as “operably coupled”. As one of average skill in the art will further appreciate, the term “compares favorably”, as may be used herein, indicates that a comparison between two or more elements, items, signals, etc., provides a desired relationship. For example, when the desired relationship is that signal 1 has a greater magnitude than signal 2, a favorable comparison may be achieved when the magnitude of signal 1 is greater than that of signal 2 or when the magnitude of signal 2 is less than that of signal 1.

[0073] The preceding discussion has presented various embodiments for wireless communications in a wireless communication system that includes a plurality of wireless communication devices of differing protocols. As one of average skill in the art will appreciate, other embodiments may be derived from the teachings of the present invention without deviating from the scope of the claims.

What is claimed is:

1. A method for multiple protocol wireless communications, the method comprises:

determining protocols of wireless communication devices within a proximal region;

determining whether the protocols of the wireless communication devices within the proximal region are of a like protocol;

when the protocols of the wireless communication devices within the proximal region are not of a like protocol, selecting a protocol of the protocols of the wireless communication devices within the proximal region based on a protocol ordering to produce a selected protocol; and

utilizing the selected protocol by the wireless communication devices within the proximal region to set up a wireless communication within the proximal region.

2. The method of claim 1 further comprises:

when the wireless communication is set up using the selected protocol, utilizing, by a wireless communication device of the wireless communication devices, the protocol of the wireless communication device for a data transmission.

3. The method of claim 1, wherein the protocol ordering comprises:

an ordering of the protocols based on legacy ordering of wireless communication devices.

4. The method of claim 1, wherein the protocol ordering comprises:

an ordering of the protocols based on a transmission efficiency ordering of the protocols.

5. The method of claim 1, wherein the protocols comprise wireless local area network communication formats in accordance with at least one of:

IEEE 802.11, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and further versions of the IEEE 802.11.

6. The method of claim 1, wherein the proximal region comprises at least one of:

coverage area of a basic service set;

coverage area of an ad-hoc network; and

coverage area of the basic service set and at least a portion of at least one neighboring basic service set.

7. The method of claim 1, wherein the selected protocol comprises at least one of:

a first frame format that includes a legacy header and a Media-Specific Access Control (MAC) layer partitioning field;

a second frame format that includes a physical (PHY) layer backward compatible header; and

a third frame format that includes a current version header and the MAC layer partitioning field.

8. The method of claim 1, wherein the determining of the protocols comprises:

determining frequency band of use of each of the wireless communication devices; and

based on the frequency band, determining wireless local area network communication format of each of the wireless communication devices.

9. The method of claim 1 further comprises:

monitoring data transmissions within the proximal region for unacknowledged data transmissions;

comparing the unacknowledged data transmission with a transmission failure threshold;

when the comparing the unacknowledged data transmission with the transmission failure threshold is unfavorable, selecting another one of the protocols of the wireless communication devices within the proximal region based on the protocol ordering to produce another selected protocol; and

utilizing the another selected protocol by the wireless communication devices within the proximal region to set up the wireless communication within the proximal region.

10. A method for a wireless communication device to participate in multiple protocol wireless communications, the method comprises:

affiliating with an access point utilizing a protocol of the wireless communication device;

receiving a selected protocol from the access point;

determining whether the selected protocol and the protocol of the wireless communication device are of a like protocol; and

when the selected protocol and the protocol of the wireless communication device are not of the like protocol:

utilizing the selected protocol to set up a wireless communication; and

utilizing the protocol of the wireless communication device for the wireless communication.

11. The method of claim 10, wherein the selected protocol and the protocol of the wireless communication device

comprise wireless local area network communication formats in accordance with at least one of:

IEEE 802.11, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and further versions of the IEEE 802.11.

**12.** The method of claim 10, wherein the selected protocol comprises at least one of:

a first frame format that includes a legacy header and a Media-Specific Access Control (MAC) layer partitioning field;

a second frame format that includes a physical (PHY) layer backward compatible header; and

a third frame format that includes a current version header and the MAC layer partitioning field.

**13.** A wireless local area network (WLAN) comprises:

at least one access point; and

a plurality of wireless communication devices; wherein each of the least one access points includes a processing module and memory, wherein the memory includes operational instructions that cause the processing module to:

determining protocols of the plurality of wireless communication devices within a proximal region of the access point;

determining whether the protocols of the plurality of wireless communication devices within the proximal region are of a like protocol; and

when the protocols of the plurality of wireless communication devices within the proximal region are not of a like protocol, selecting a protocol of the protocols of the plurality of wireless communication devices within the proximal region based on a protocol ordering to produce a selected protocol; and

wherein each of the plurality of wireless communication devices includes a station processing module and station memory, wherein the station memory includes operational instructions that cause the station processing module to utilize the selected protocol within the proximal region to set up a wireless communication within the proximal region.

**14.** The WLAN of claim 13, wherein the station memory further comprises operational instructions that cause the station processing module to:

when the wireless communication is set up using the selected protocol, utilize the protocol of the wireless communication device for a data transmission.

**15.** The WLAN of claim 13, wherein the protocol ordering comprises:

an ordering of the protocols based on legacy ordering of wireless communication devices.

**16.** The WLAN of claim 13, wherein the protocol ordering comprises:

an ordering of the protocols based on a transmission efficiency ordering of the protocols.

**17.** The WLAN of claim 13, wherein the protocols comprise wireless local area network communication formats in accordance with at least one of:

IEEE 802.11, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and further versions of the IEEE 802.11.

**18.** The WLAN of claim 13, wherein the proximal region comprises at least one of:

coverage area of a basic service set;

coverage area of an ad-hoc network; and

coverage area of the basic service set and at least a portion of at least one neighboring basic service set.

**19.** The WLAN of claim 13, wherein the selected protocol comprises at least one of:

a first frame format that includes a legacy header and a Media-Specific Access Control (MAC) layer partitioning field;

a second frame format that includes a physical (PHY) layer backward compatible header; and

a third frame format that includes a current version header and the MAC layer partitioning field.

**20.** The WLAN of claim 13, wherein the memory further comprises operational instructions that cause the processing module of the access point to determine the protocols by:

determining frequency band of use of each of the wireless communication devices; and

based on the frequency band, determining wireless local area network communication format of each of the wireless communication devices.

**21.** The WLAN of claim 13 further comprises:

the memory further including operational instructions that cause the processing module of the access point to:

monitor data transmissions within the proximal region for unacknowledged data transmissions;

compare the unacknowledged data transmission with a transmission failure threshold; and

when the comparing the unacknowledged data transmission with the transmission failure threshold is unfavorable, select another one of the protocols of the wireless communication devices within the proximal region based on the protocol ordering to produce another selected protocol; and

the station memory further including operational instructions that cause the station processing module to utilize the another selected protocol to set up the wireless communication within the proximal region.

**22.** A wireless communication device comprises:

a radio transceiver;

a processing module; and

memory operably coupled to the processing module, wherein the memory includes operational instructions that cause the processing module to:

affiliate, via the radio transceiver, with an access point utilizing a protocol of the wireless communication device;

receive, via the radio transceiver, a selected protocol from the access point;

determine whether the selected protocol and the protocol of the wireless communication device are of a like protocol; and

when the selected protocol and the protocol of the wireless communication device are not of the like protocol:

utilize the selected protocol to set up a wireless communication; and

utilize the protocol of the wireless communication device for the wireless communication.

**23.** The wireless communication device of claim 22, wherein the selected protocol and the protocol of the wireless communication device comprise wireless local area network communication formats in accordance with at least one of:

IEEE 802.11, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and further versions of the IEEE 802.11.

**24.** The wireless communication device of claim 22, wherein the selected protocol comprises at least one of:

a first frame format that includes a legacy header and a Media-Specific Access Control (MAC) layer partitioning field;

a second frame format that includes a physical (PHY) layer backward compatible header; and

a third frame format that includes a current version header and the MAC layer partitioning field.

**25.** A method for a wireless communication device to participate in multiple protocol wireless communications, the method comprises:

receiving a frame via a wireless channel;

when a selected protocol is not of a like protocol of the wireless communication device, utilizing the selected protocol to interpret at least a portion of wireless communication set up information of the frame;

based on the interpreting of the at least a portion of the wireless communication set up information, determining whether a remainder of the frame is formatted in accordance with the protocol of the wireless communication device; and

when the remainder of the frame is formatted in accordance with the protocol of the wireless communication device, processing the remainder of the frame based in accordance with the protocol of the wireless communication device.

**26.** The method of claim 25 further comprises:

interpreting a header of the frame for conformity with a legacy physical layer format to provide the interpreting of the at least a portion of the wireless communication set up information; and

when the header of the frame does not conform with the legacy physical layer format, determining that the remainder of the frame is formatted in accordance with the protocol of the wireless communication device.

**27.** The method of claim 26, wherein the legacy physical layer format includes at least one of IEEE 802.11a and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11 n.

**28.** The method of claim 25 further comprises:

interpreting the frame for conformity with a legacy Media-Specific Access Control (MAC) layer format to provide the interpreting of the at least a portion of the wireless communication set up information; and

when the header of the frame does not conform with the legacy MAC layer format, determining that the remainder of the frame is formatted in accordance with the protocol of the wireless communication device.

**29.** The method of claim 28, wherein the legacy physical layer format includes at least one of IEEE 802.11a, IEEE 802.11b, and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11n.

**30.** A wireless communication device comprises:

a radio transceiver;

a processing module; and

memory operably coupled to the processing module, wherein the memory includes operational instructions that cause the processing module to:

receive a frame via a wireless channel;

when a selected protocol is not of a like protocol of the wireless communication device, utilize the selected protocol to interpret at least a portion of wireless communication set up information of the frame;

based on the interpreting of the at least a portion of the wireless communication set up information, determine whether a remainder of the frame is formatted in accordance with the protocol of the wireless communication device; and

when the remainder of the frame is formatted in accordance with the protocol of the wireless communication device, process the remainder of the frame based in accordance with the protocol of the wireless communication device.

**31.** The wireless communication device of claim 30, wherein the memory further comprises operational instructions that cause the processing module to:

interpret a header of the frame for conformity with a legacy physical layer format to provide the interpreting of the at least a portion of the wireless communication set up information; and

when the header of the frame does not conform with the legacy physical layer format, determine that the remainder of the frame is formatted in accordance with the protocol of the wireless communication device.

**32.** The wireless communication device of claim 31, wherein the legacy physical layer format includes at least one of IEEE 802.11a and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11n.

**33.** The wireless communication device of claim 30, wherein the memory further comprises operational instructions that cause the processing module to:

interpret the frame for conformity with a legacy Media-Specific Access Control (MAC) layer format to provide the interpreting of the at least a portion of the wireless communication set up information; and

when the header of the frame does not conform with the legacy MAC layer format, determine that the remainder of the frame is formatted in accordance with the protocol of the wireless communication device.

**34.** The wireless communication device of claim 33, wherein the legacy physical layer format includes at least one of IEEE 802.11a, IEEE 802.11b, and IEEE 802.11g and wherein the protocol of the wireless communication device includes IEEE 802.11n.

**35.** A method for a wireless communication device to participate in multiple protocol wireless communications, the method comprises:

determining whether a selected protocol is of a like protocol of the wireless communication device;

when the selected protocol is not of the like protocol of the wireless communication device, formatting a portion of wireless communication set up information in accordance with the selected protocol to produce legacy formatted set up information;

formatting remainder of the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information;

formatting data in accordance with the protocol of the wireless communication device to produce current formatted data; and

transmitting a frame containing the legacy formatted set up information, the current formatted set up information, and the current formatted data.

**36.** The method of claim 35 further comprises:

when the selected protocol is of the like protocol of the wireless communication device, formatting the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information;

formatting the data in accordance with the protocol of the wireless communication device to produce current formatted data; and

transmitting the frame containing the current formatted set up information and the current formatted data.

**37.** The method of claim 36 further comprises:

the wireless communication set up information including a short training sequence field, a plurality of long training sequence fields, and a high data throughput service field; and

the data includes a plurality of data symbol fields.

**38.** The method of claim 35 further comprises:

the portion of the wireless communication set up information includes a short training sequence field, a long training sequence field, and a service field;

the remainder of the wireless communication set up information includes a plurality of supplemental long training sequences and a high data throughput service field; and

the data includes a plurality of data symbol fields.

**39.** A wireless communication device comprises:

a radio transceiver;

a processing module; and

memory operably coupled to the processing module, wherein the memory includes operational instructions that cause the processing module to:

determine whether a selected protocol is of a like protocol of the wireless communication device;

when the selected protocol is not of the like protocol of the wireless communication device, format a portion of wireless communication set up information in accordance with the selected protocol to produce legacy formatted set up information;

format remainder of the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information;

format data in accordance with the protocol of the wireless communication device to produce current formatted data; and

transmit a frame containing the legacy formatted set up information, the current formatted set up information, and the current formatted data.

**40.** The wireless communication device of claim 39, wherein the memory further comprises operational instructions that cause the processing module to:

when the selected protocol is of the like protocol of the wireless communication device, format the wireless communication set up information in accordance with the protocol of the wireless communication device to produce current formatted set up information;

format the data in accordance with the protocol of the wireless communication device to produce current formatted data; and

transmit the frame containing the current formatted set up information and the current formatted data.

**41.** The wireless communication device of claim 40 further comprises:

the wireless communication set up information including a short training sequence field, a plurality of long training sequence fields, and a high data throughput service field; and

the data includes a plurality of data symbol fields.

**42.** The wireless communication device of claim 39 further comprises:

the portion of the wireless communication set up information includes a short training sequence field, a long training sequence field, and a service field;

the remainder of the wireless communication set up information includes a plurality of supplemental long training sequences and a high data throughput service field; and

the data includes a plurality of data symbol fields.

\* \* \* \* \*