


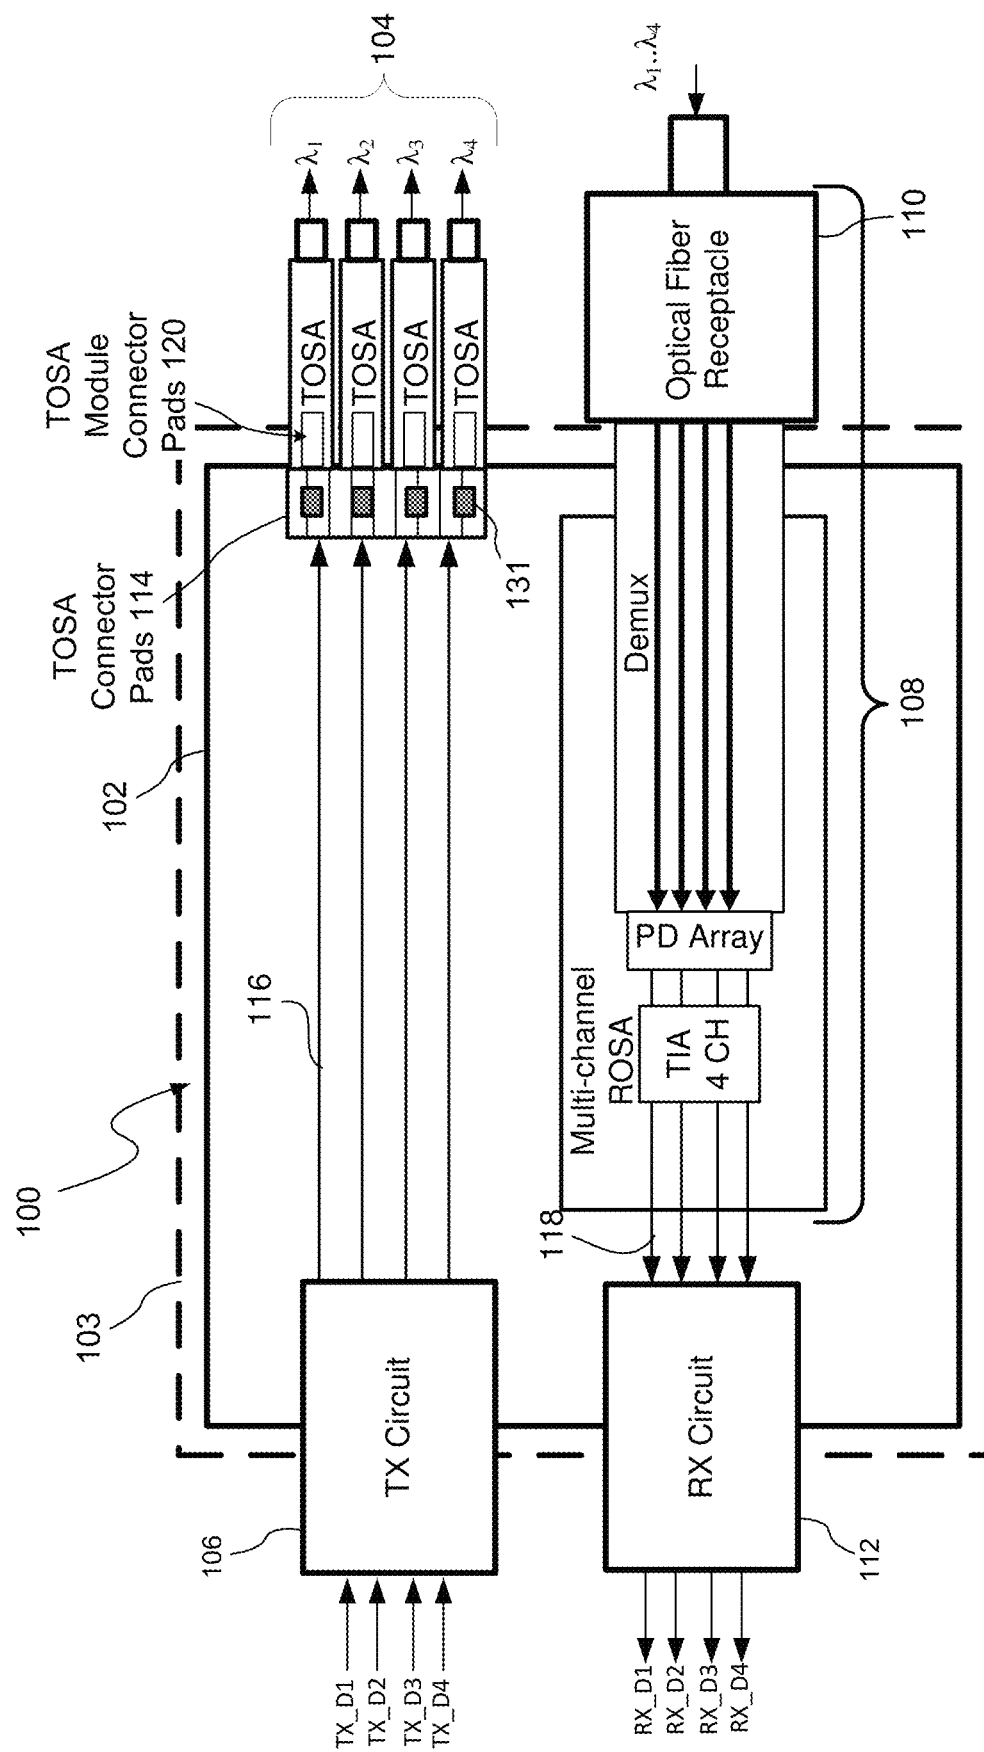

தேவ

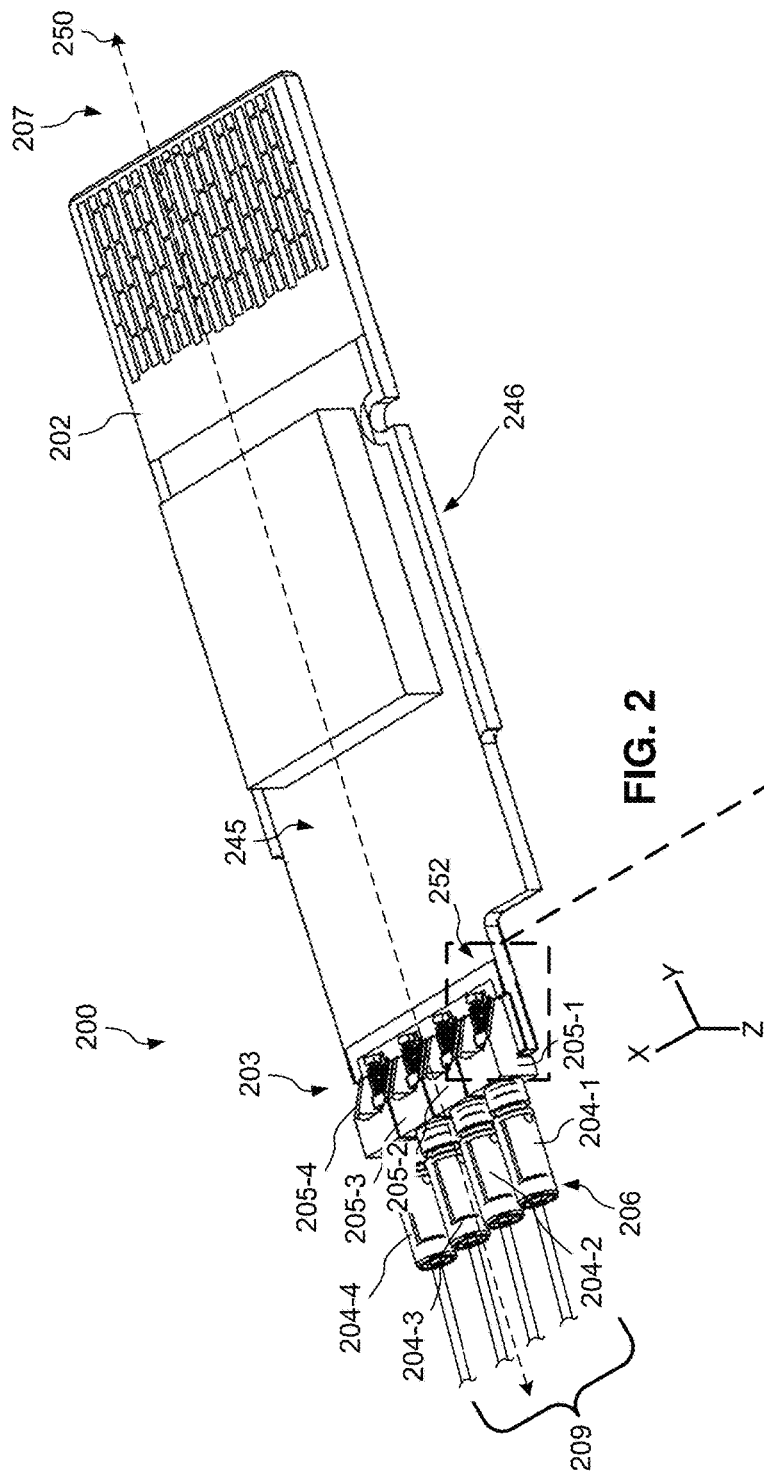


FIG. 2

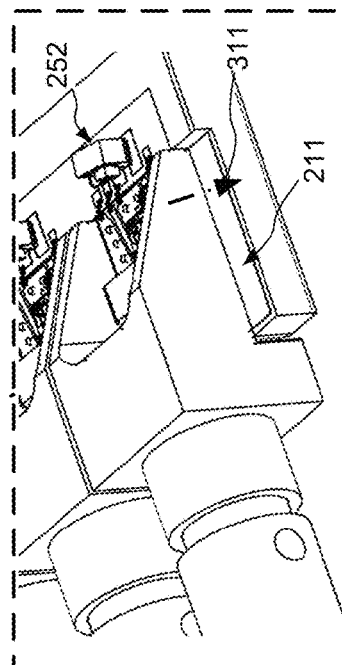


FIG. 3

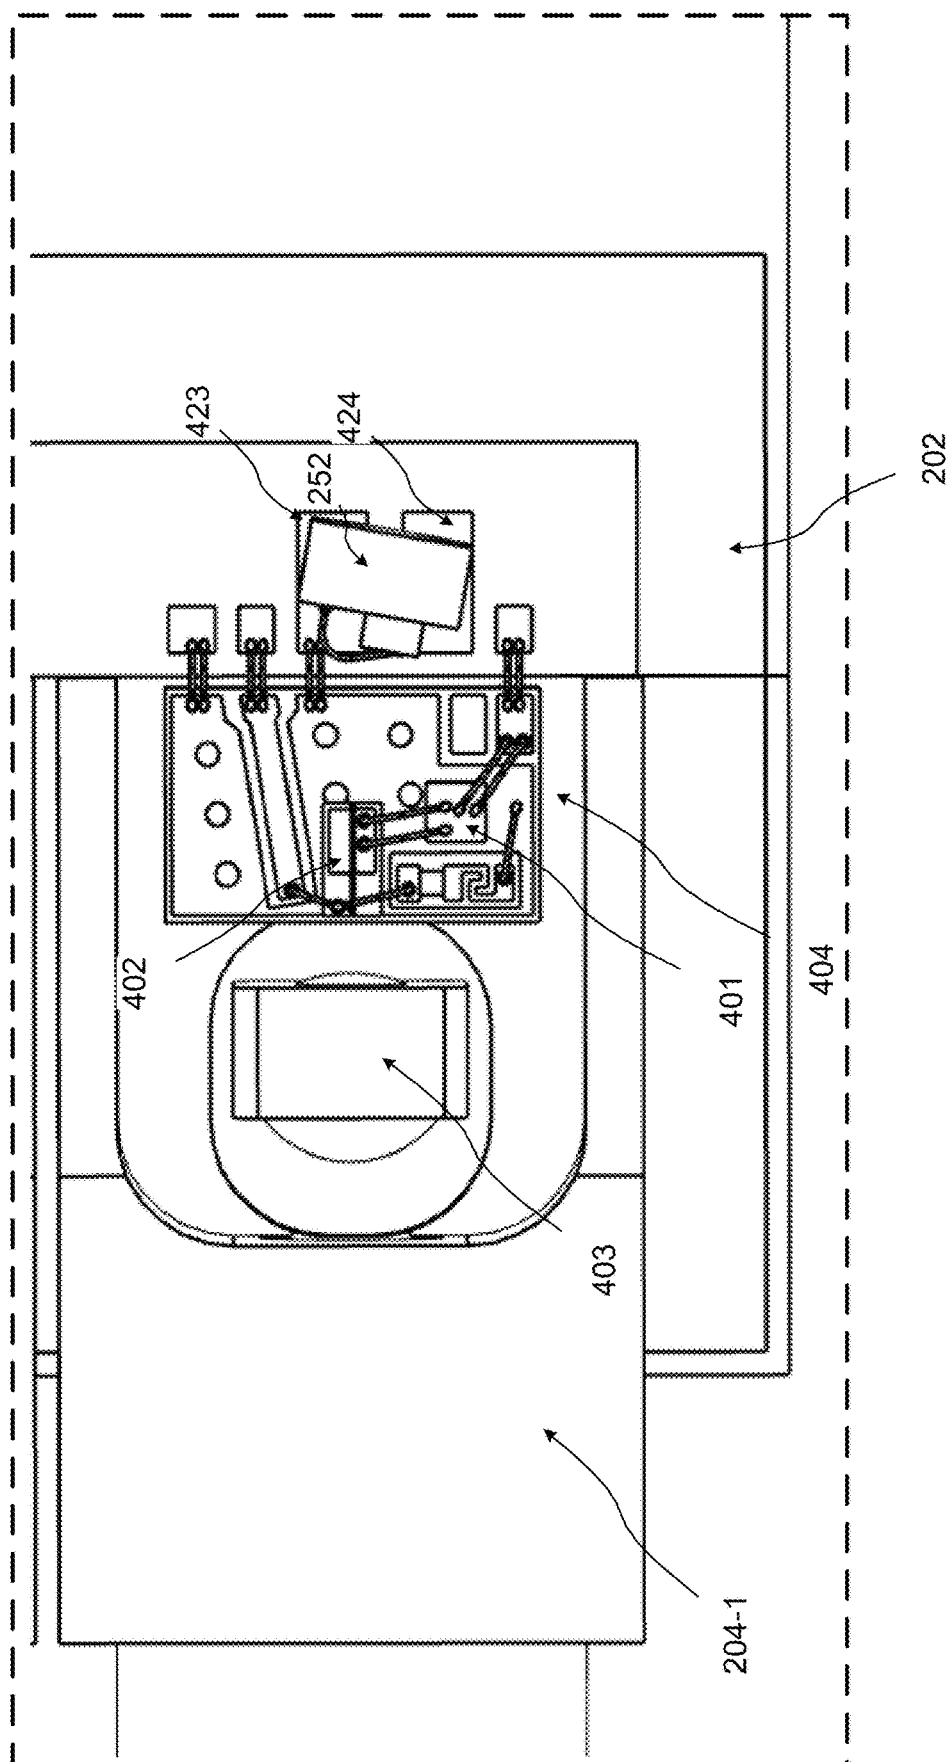


FIG. 4

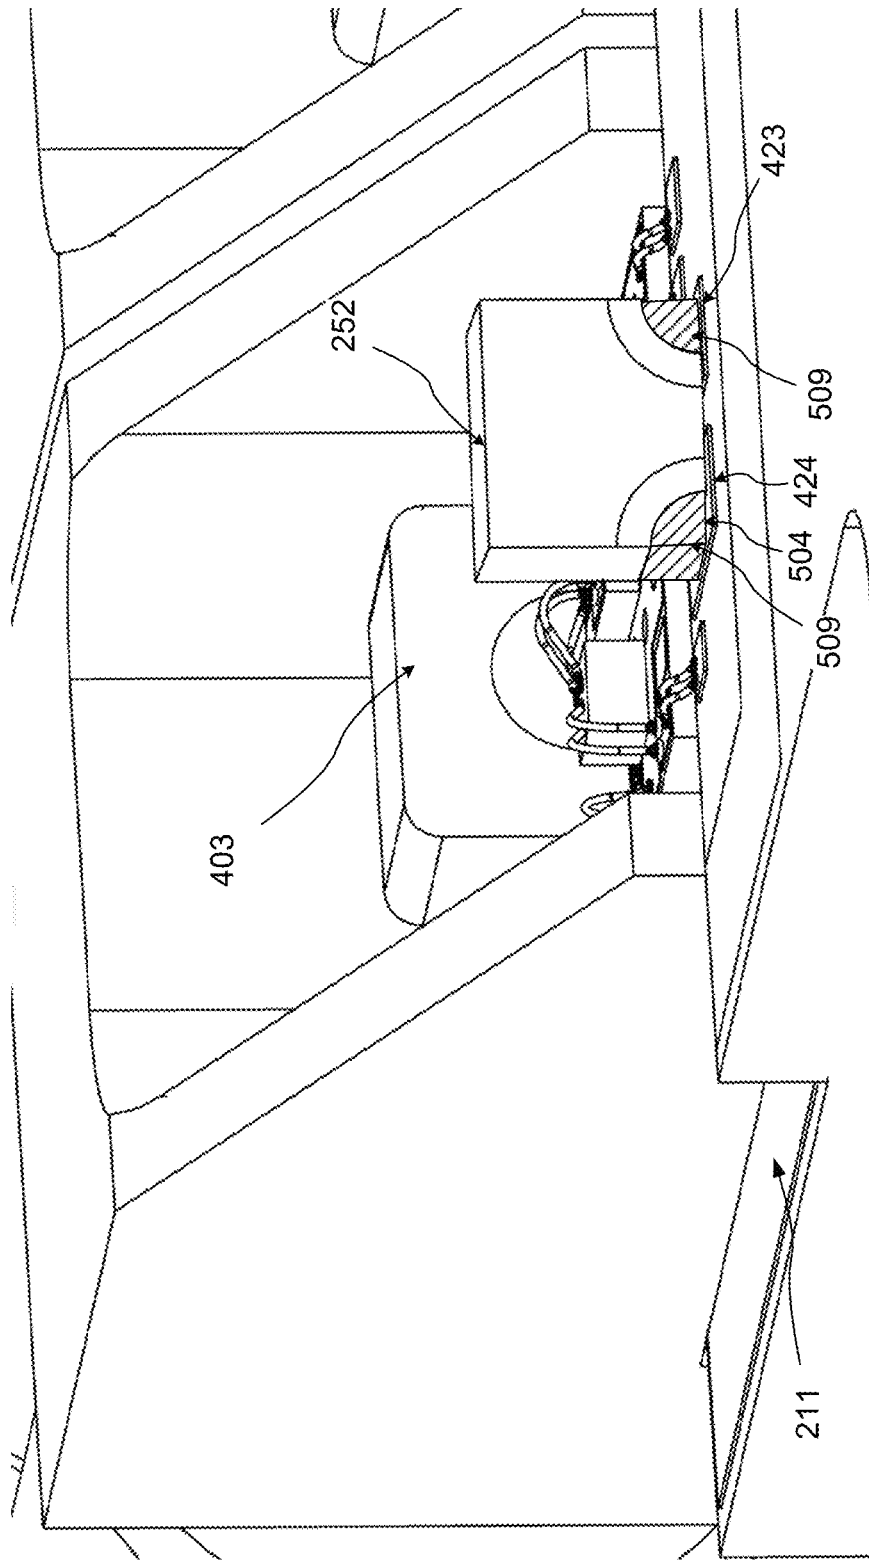


FIG. 5


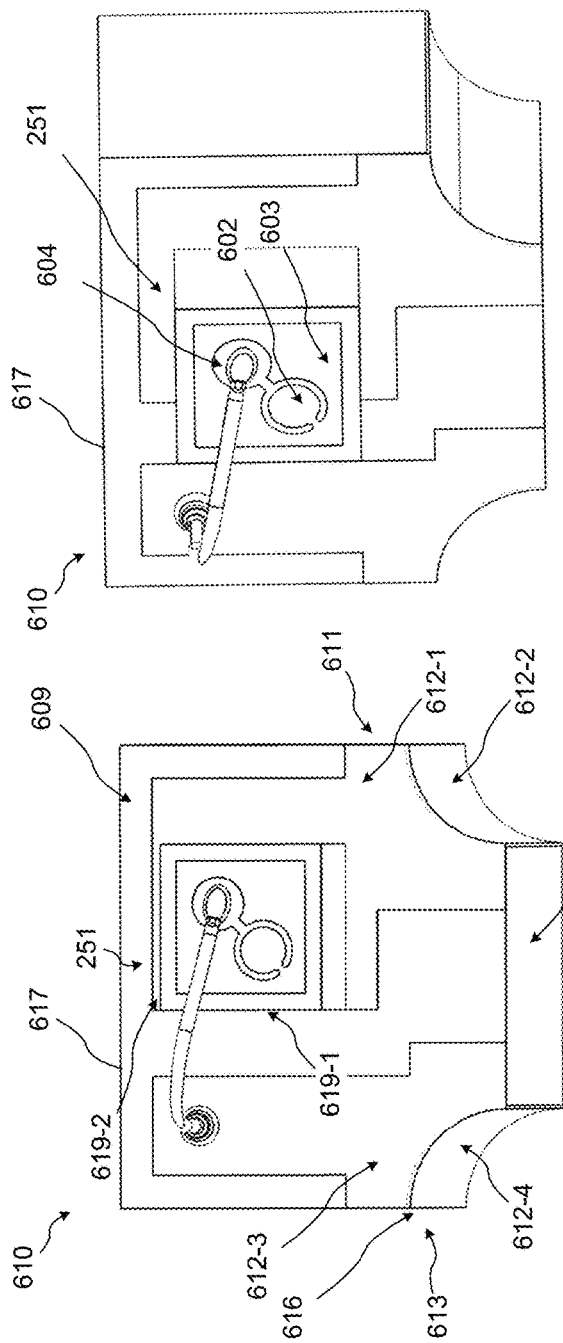


FIG. 6A

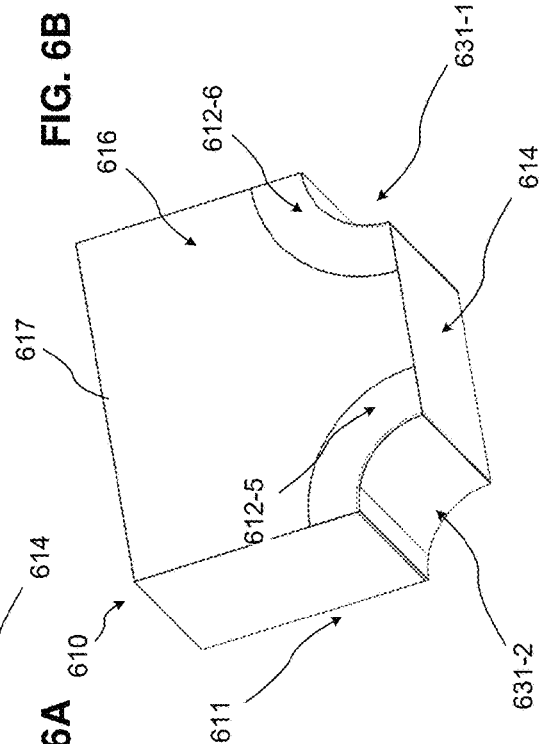

FILED

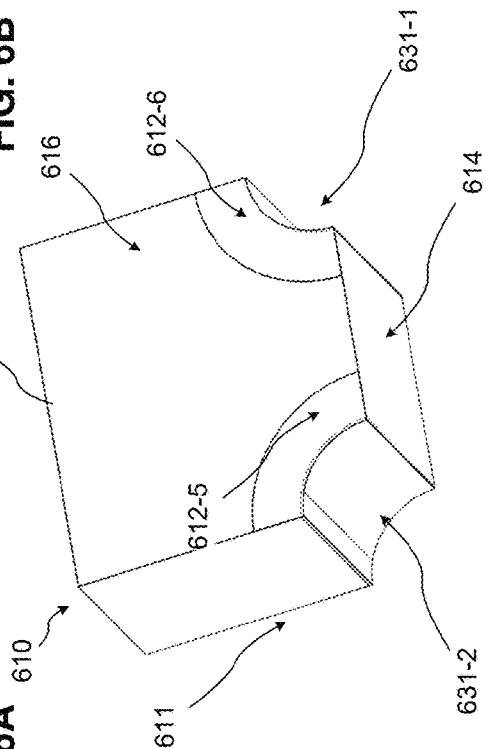
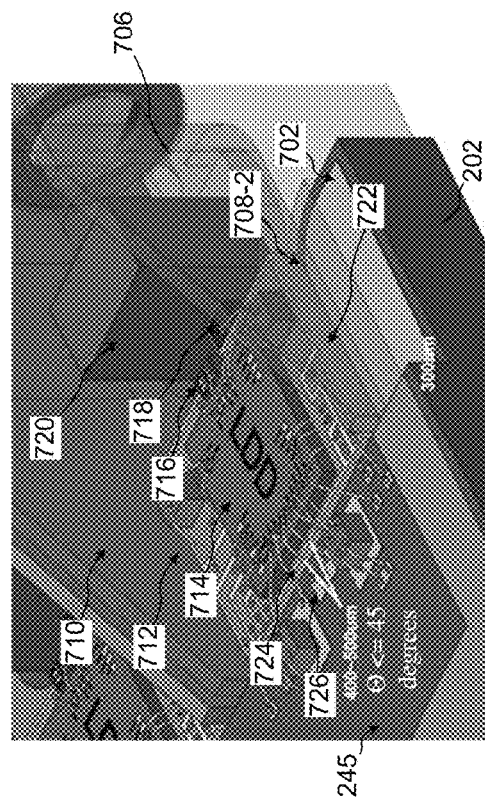
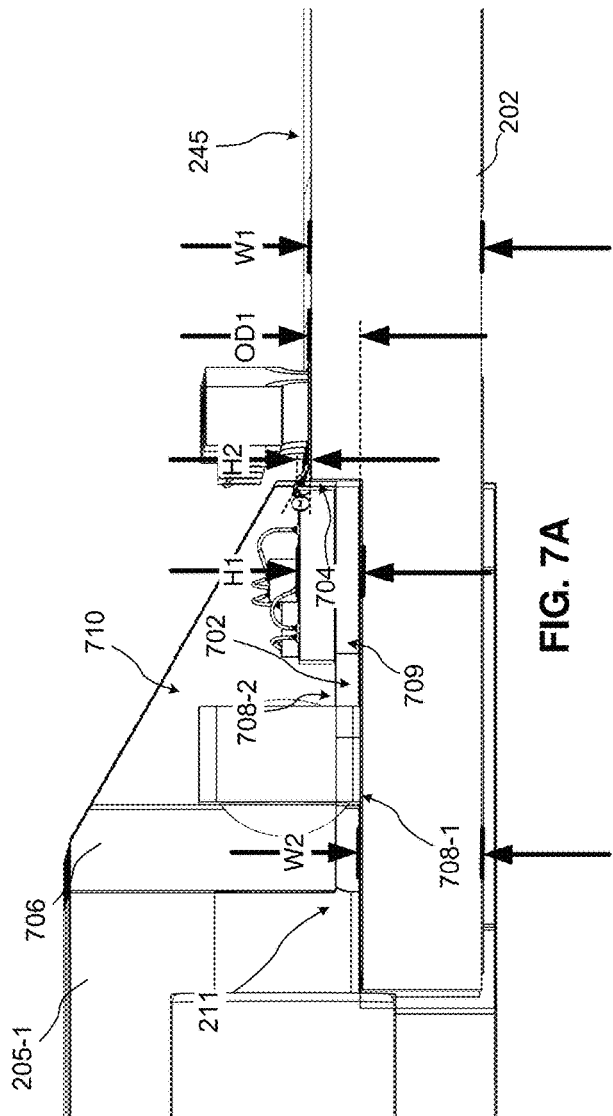


FIG. 6C



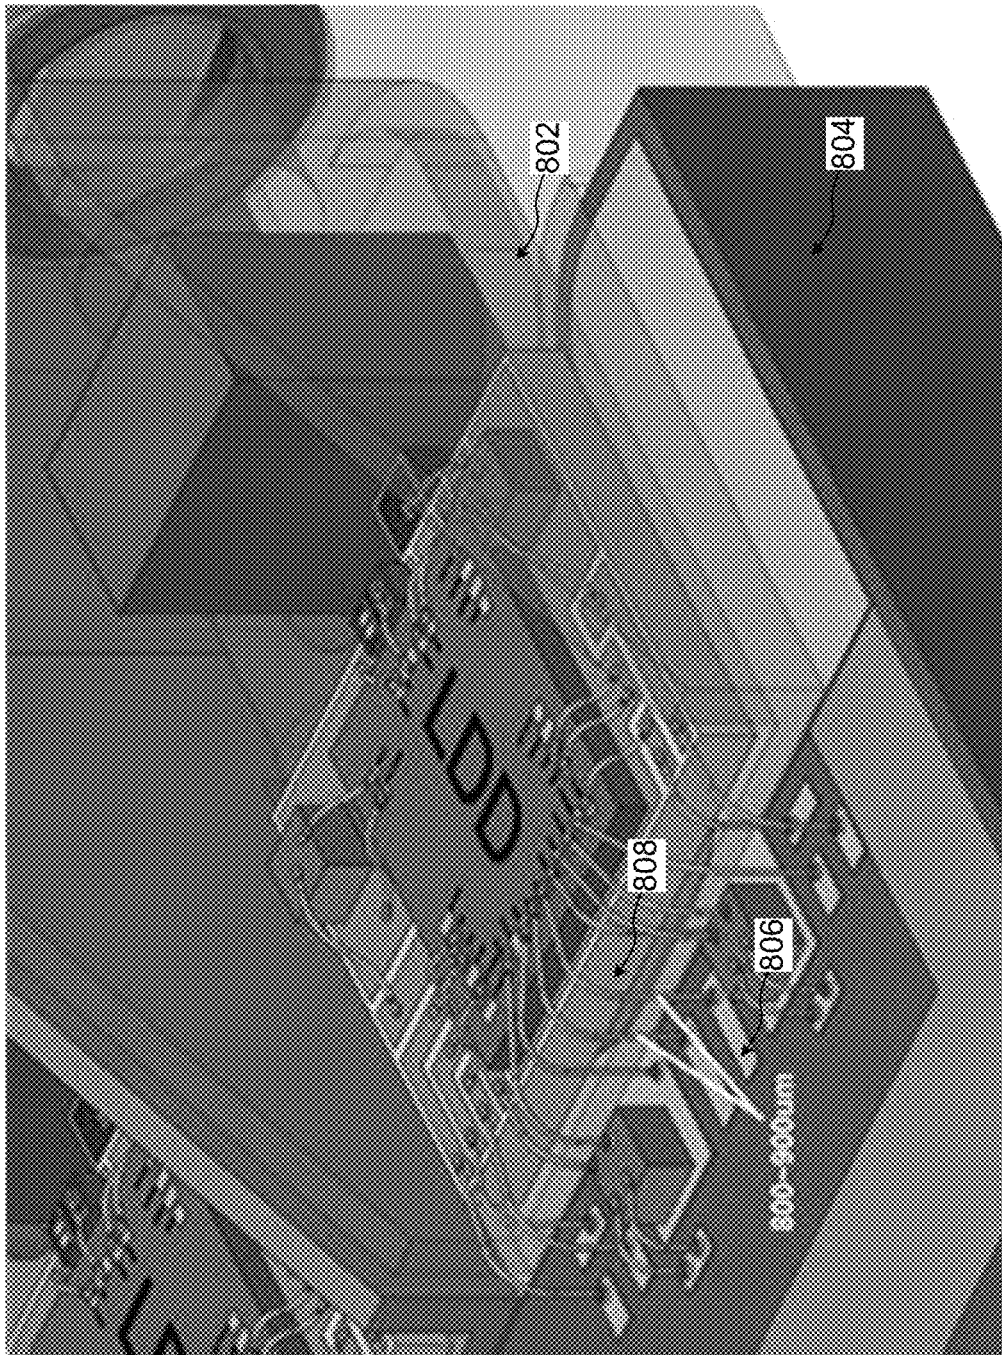


FIG. 8

1

SUBSTRATE WITH STEPPED PROFILE FOR MOUNTING TRANSMITTER OPTICAL SUBASSEMBLIES AND AN OPTICAL TRANSMITTER OR TRANSCEIVER IMPLEMENTING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is related to co-pending application Ser. No. 16/737,414 entitled "Monitor Photodiode (MPD) Submount for Vertical Mounting and Alignment of Monitoring Photodiodes" filed concurrently herewith on Jan. 8, 2020, the disclosure of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

The present disclosure relates to optical communication devices, and more particularly, to a substrate with a stepped profile for simplifying mounting and alignment of transmitter optical subassemblies (TOSA) modules, e.g., via edge mounting, and to reduce the vertical offset between TOSA modules and radio frequency (RF) terminals of the substrate to allow for relatively short electrical interconnect lengths, e.g., via wire bonds.

BACKGROUND

Optical transceivers are used to transmit and receive optical signals for various application including, without limitation, internet data center, cable TV broadband, and fiber to the home (FTTH) applications. Optical transceivers provide higher speeds and bandwidth over longer distances, for example, as compared to transmission over copper cables. The desire to provide higher speeds in smaller optical transceiver modules has presented challenges, for example, with respect to space management and manufacturing yield.

Optical transceiver modules generally include one or more transmitter optical subassemblies (TOSAs) for transmitting optical signals and one or more receiver optical subassemblies (ROSAs) for receiving optical signals. In general, TOSAs include one or more lasers to emit one or more channel wavelengths and associated circuitry for driving the lasers and monitoring power to ensure nominal performance. However, continued scaling and the standardization of transmission speeds of up to and exceeding 400 Gbp/s presents numerous technical challenges that complicates mounting and electrical interconnection between TOSA modules and a supporting substrate, e.g., a printed circuit board (PCB).

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features and advantages will be better understood by reading the following detailed description, taken together with the drawings wherein:

FIG. 1 shows a block diagram of an example multi-channel optical transceiver module in accordance with an embodiment of the present disclosure.

FIG. 2 is a perspective view of a multi-channel optical transceiver module for use in the multi-channel optical transceiver of FIG. 1, in accordance with an embodiment of the present disclosure.

FIG. 3 shows an enlarged region of the multi-channel optical transceiver module of FIG. 2 in accordance with an embodiment of the present disclosure.

2

FIG. 4 shows a top view of the enlarged portion shown in FIG. 3, in accordance with an embodiment of the present disclosure.

FIG. 5 shows another enlarged region of the multi-channel optical transceiver module of FIG. 2 in accordance with an embodiment of the present disclosure.

FIG. 6A shows a front view of a monitor photodiode submount suitable for use in the multi-channel optical transceiver module of FIG. 2, in accordance with an embodiment.

FIG. 6B shows a perspective view of the monitor photodiode submount of FIG. 6A in accordance with an embodiment.

FIG. 6C shows another perspective view of a rear side of the monitor photodiode submount of FIG. 6A in accordance with an embodiment.

FIG. 7A shows a cross-sectional view of the multi-channel optical transceiver module of FIG. 2 in accordance with an embodiment.

FIG. 7B shows an enlarged portion of a multi-channel optical transceiver module consistent with an embodiment of the present disclosure.

FIG. 8 shows an example approach to mounting and electrical coupling of transmitter optical subassemblies (TOSA) modules on a transceiver substrate.

DETAILED DESCRIPTION

As discussed above, scaling and increased transmission speeds raise numerous challenges in optical subassembly design. One such challenge includes reducing the impact of electrical interconnection devices, e.g., wire bonds, on high frequency signals such as radio frequency (RF) signals that drive TOSA modules.

These challenges are better understood by way of illustration. FIG. 8 shows a portion of a transceiver substrate **804**, e.g., a printed circuit board, that edge-mounts to a plurality of TOSA modules, e.g., TOSA module **802**. In this example, the TOSA modules **802** can be at least partially formed/configured separate from the transceiver substrate **804** and then subsequently coupled "on board" the transceiver substrate **804**. Such "on board" mounting of optical subassemblies can significantly simplify manufacturing and design of transceivers and other devices that transmit and/or receive optical signals.

As further shown in FIG. 8, this on-board mounting can include the laser diode driver (LDD) of each TOSA module electrically coupling with adjacent RF terminals, e.g., RF terminals **806**, to receive RF driving signals to modulate an associated laser by way of wire bonds **808**. However, electrical interconnects such as wire bonds **808** can introduce time of flight (ToF) issues for RF signals, as well as impedance matching issues which can significantly degrade signaling performance. Wire bonds also tend to be fragile and can easily break by inadvertent contact.

In the context of wire bonding specifically, one approach to mitigate the impact of such issues on signaling performance includes having wire bonds with relatively short overall lengths. While this solution seems relatively simple, space constraints and other factors such as component layout can complicate or otherwise prevent shortening wire bond lengths. For instance, in the context of FIG. 8, the TOSA **802** includes a submount that vertically displaces the LDD, and importantly, the electrodes of the LDD that receive RF signaling. This vertical displacement results in wire bonds **808** extending at substantially 90 degrees from the RF terminals and having an overall length of about 800-900

microns to reach corresponding LDD terminals. Such overall wire bond lengths significantly impact signal quality, particularly high frequency RF signals, and ultimately can limit the maximum achievable transmission speeds of the TOSA module.

Continued development to achieve ever-higher optical transmission speeds, e.g., up to and beyond 400 Gbp/s, depends at least in part on optical subassembly module designs that significantly reduce the length of electrical interconnections between associated components without increasing design and manufacturing complexity. Moreover, continued development and rapid adoption of such high-speed transmission systems further depends at least in part on optical subassembly module designs that both shorten electrical interconnect lengths and allow for continued scaling without substantial redesign of existing components, such as PCBs and TOSA modules.

Thus, in accordance with an embodiment, a stepped profile for substrates that support “on board” optical subassembly arrangements is disclosed that allows for mounting of TOSA modules to the substrate in a recessed orientation to reduce the overall distance between terminals of the substrate and associated components of the TOSA, e.g., RF terminals of the substrate and an LDD of the TOSA. In an embodiment, the substrate comprises a printed circuit board PCB or PCB assembly (PCBA) that includes an electrical coupling end to electrically couple with external circuitry and an optical coupling end to couple to one or more TOSA modules. The substrate provides at least a first component mounting surface for coupling to circuitry to provide power and driving signals to the one or more TOSA modules. The substrate further defines a recessed TOSA mounting surface at the optical coupling end. The TOSA mounting surface extends substantially parallel with the first component mounting surface, and is offset from the same by a first predetermined offset distance. Thus, TOSA modules mount to the substrate via the recessed TOSA mounting surface, and components such as LDDs that would otherwise have a vertical offset relative to the supporting traces of the substrate (e.g., as shown in FIG. 8) get displaced towards the same based on the first predetermined offset distance. The TOSA module components may therefore get “countersunk” via the recessed TOSA mounting surface to allow for relatively shorter electrical interconnection with the substrate.

Substrates having stepped profiles consistent with the present disclosure advantageously utilize the recessed TOSA mounting surface to allow for mounting of TOSA modules in a manner that maintains the advantages and simplicity of “on board” TOSA arrangements while also significantly reducing the overall length of electrical interconnections to provide RF and/or power signals to the same. In an embodiment, the stepped profile reduces electrical interconnection lengths by up to and exceeding 50% relative to approaches that do not feature substrates with stepped profiles (e.g., compare FIG. 8 with FIG. 7B), and as a result, the stepped profile significantly reduces the introduction of signal degradation when utilizing relatively longer electrical interconnections.

As used herein, “channel wavelengths” refer to the wavelengths associated with optical channels and may include a specified wavelength band around a center wavelength. In one example, the channel wavelengths may be defined by an International Telecommunication (ITU) standard such as the ITU-T dense wavelength division multiplexing (DWDM) grid. This disclosure is equally applicable to coarse wavelength division multiplexing (CWDM). In one specific

example embodiment, the channel wavelengths are implemented in accordance with local area network (LAN) wavelength division multiplexing (WDM), which may also be referred to as LWDM. The term “coupled” as used herein refers to any connection, coupling, link or the like and “optically coupled” refers to coupling such that light from one element is imparted to another element. Such “coupled” devices are not necessarily directly connected to one another and may be separated by intermediate components or devices that may manipulate or modify such signals.

The term substantially, as generally referred to herein, refers to a degree of precision within acceptable tolerance that accounts for and reflects minor real-world variation due to material composition, material defects, and/or limitations/peculiarities in manufacturing processes. Such variation may therefore be said to achieve largely, but not necessarily wholly, the stated characteristic. To provide one non-limiting numerical example to quantify “substantially,” minor variation may cause a deviation of up to and including $\pm 5\%$ from a particular stated quality/characteristic unless otherwise provided by the present disclosure.

Referring to the Figures, FIG. 1 illustrates an optical transceiver module 100, consistent with embodiments of the present disclosure. The optical transceiver module 100 is shown in a highly simplified form for clarity and ease of explanation and not for purposes of limitation. In this embodiment, the optical transceiver module 100 can be pluggable (e.g., conforms with pluggable small form factor (SFFP) standards) and transmits and receives four (4) channels using four different channel wavelengths (λ_1 , λ_2 , λ_3 , λ_4) and may be capable of transmission rates of at least about 25 Gbps per channel. In one example, the channel wavelengths λ_1 , λ_2 , λ_3 , λ_4 may be within a ± 13 nm range and have respective channel wavelengths of 1270 nm, 1290 nm, 1310 nm, and 1330 nm, respectively. Other channel wavelengths and configurations are within the scope of this disclosure including those associated with local area network (LAN) wavelength division multiplexing (WDM). For instance, the optical transceiver module 100 can include up to eight (8) or more channels and provide transmission rates of at least 25 Gbps per channel.

The optical transceiver module 100 may also be capable of transmission distances of 2 km to at least about 10 km. The optical transceiver module 100 may be used, for example, in internet data center applications or fiber to the home (FTTH) applications.

In an embodiment, the optical transceiver module 100 is disposed in a transceiver housing 103. The transceiver housing 103 can be configured with one or more cavities to receive one or more optical transceiver modules, depending on a desired configuration.

The optical transceiver module 100 may include a number of components to support transceiver operations. The optical transceiver module 100 may include an optical transceiver substrate 102, a plurality of transmitter optical subassemblies (TOSA) modules 104 for transmitting optical signals having different channel wavelengths, transmit connecting circuit 106, a multi-channel receiver optical subassembly (ROSA) arrangement 108 for receiving optical signals on different channel wavelengths, an optical fiber receptacle 110 to receive and align a fiber connector (e.g., a ferrule) with the ROSA, and a receiver connecting circuit 112.

The optical transceiver substrate 102 includes traces, connector pads, and other circuitry to support transceiver operations. The optical transceiver substrate 102 may include TOSA connector pads 114 (or terminals 114) that enable each of the TOSA modules 104 to mount and

5

electrically couple to the optical transceiver substrate **102**. The TOSA connector pads **114** may also be referred to herein as a simply connector pads. The optical transceiver substrate **102** may include traces **116** that couple the TOSA connector pads **114** to the transmit connecting circuit **106**. As discussed in greater detail below, monitor photodiode (PD) submounts/modules may be disposed on (e.g., directly) the traces **116** and/or the TOSA connector pads **114**.

The optical transceiver substrate **102** may include traces **118** that electrically couple the ROSA arrangement **108** to the receiver connecting circuit **112**. The optical transceiver substrate **102** may provide an optical transceiver module that may be “plugged” into an optical transceiver cage. Therefore, the transmit connecting circuit **106** and the receiver connecting circuit **112** may electrically couple to external circuitry of the optical transceiver cage. The optical transceiver substrate **102** may be manufactured from a multi-layer printed circuitry board (PCB), although other types of substrates may be utilized and are within the scope of this disclosure.

Each of the TOSA modules **104** may be configured to receive driving electrical signals (TX_D1 to TX_D4), convert the electrical signals to a multiplexed optical signal (e.g., a signal with channel wavelengths $\lambda_1 \dots \lambda_n$) and output the same to a multiplexer (not shown). Each of the TOSA modules **104** may be electrically coupled to the TOSA connector pads **114** and to the traces **116** through TOSA module connector pads **120**. Each of the TOSA modules **104** may include a laser diode device and supporting circuitry. The laser diode devices of the TOSA modules **104** may include distributed feedback lasers (DFBs), Vertical External-cavity Surface-emitting lasers (VECSEL) or other suitable laser devices. In an embodiment, monitor photodiodes **131** may be used to monitor the lasers’ output power, as discussed below.

Referring to FIG. 2, an example embodiment of a multi-channel optical transceiver module for use in the multi-channel optical transceiver of FIG. 1 is shown. As shown, the multi-channel optical transceiver module **200** includes an optical transceiver substrate **202** coupled to a TOSA arrangement **206**. The optical transceiver substrate **202** may also be referred to herein as a substrate. The optical transceiver substrate **202** may be manufactured from a multi-layer printed circuitry board, although other types of substrates may be utilized and are within the scope of this disclosure.

The optical transceiver substrate **202** includes a first end **203** that extends to a second end **207** along a longitudinal axis **250**. The first end **203** couples to one or more TOSA modules, such as shown, for launching channel wavelengths onto transmit waveguides, e.g., optical fibers **209**. The second end **207** includes terminals/pads for electrical coupling with external circuitry to receive power and data signals. Accordingly, the first end **203** may also be referred to herein as an optical coupling end, and the second end **207** may be referred to as an electrical coupling end.

The transceiver substrate **202** further includes at least a first mounting surface **245** disposed opposite a second mounting surface **246** for supporting passive and/or active optical components. The first and second mounting surfaces **245**, **246** may also be referred to as first and second component mounting surfaces. Although not shown in the embodiment of FIG. 2, the optical transceiver substrate **202** can include a multi-channel ROSA arrangement mounted to and supported by the first and/or second mounting surfaces **245**, **246**.

6

Continuing on, the TOSA arrangement **206** includes a plurality of TOSA modules **205-1** to **205-4**. Each TOSA module of the plurality of TOSA modules **205-1** to **205-4** includes a base/body portion, and in the particular embodiment illustrated in FIG. 2, cuboid-type base portions. The plurality of TOSA modules **205-1** to **205-4** each support and align an associated laser arrangement with optical coupling ports **204-1** to **204-4**, respectively. Thus, channel wavelengths generated by the laser arrangements get launched on to associated optical fibers **209** by way of optical coupling receptacles **204-1** to **204-5**. Each laser arrangement may be configured to emit a different channel wavelength and can be monitored by an associated MPD module of an array of MPD modules to ensure nominal optical power, as will be discussed in greater detail below.

Continuing on, each of the plurality of TOSA modules **205-1** to **205-4** mount, e.g., edge mount, to the first end **203** of the substrate. The transceiver substrate **202** further includes a stepped profile, with the stepped profile being at least partially defined by a step/shoulder **211** proximate the first end **203**. Additional aspects of the stepped profile are discussed below with reference to FIGS. 7A-7B. Each of the TOSA modules **205-1** to **205-4** can include a base with a plurality of sidewalls that define a generally L-shaped profile that corresponds with the step **211**. The profile of the base may therefore advantageously align along at least two axis, e.g., the X and Z axis, by simply engaging/bottoming out against surfaces of the step **211**, e.g., vertical surface **704** shown and discussed below with reference to FIG. 7A, that operate as an alignment guide by providing mechanical stops/limits to limit travel along at least one axis. Alignment along the remaining axis, e.g., the Y axis, may therefore be performed by relatively simply lateral movement (e.g., along the X axis) of each TOSA module **205-1** to **205-4**.

Once aligned, each of the plurality of TOSA modules electrically couple to the transceiver substrate **202**, and more particularly TOSA module connector pads disposed proximate the first end **203** of the transceiver substrate **202**, which is shown more clearly in FIGS. 3 and 4. The TOSA module connector pads allow each of the TOSA modules **204-1** to **204-5** to receive driving signals and power from transmit connecting circuitry, e.g., via traces **116** and TX connecting circuit **106** (See FIG. 1).

Referring to FIGS. 3-4, an enlarged region of the multi-channel optical transceiver module of FIG. 2 is shown in accordance with embodiments of the present disclosure. As shown, each TOSA module of the TOSA arrangement **206** includes a laser arrangement having, for example, a filtering capacitor **401**, laser diode (LD) **402**, and focusing lens **403**. One such laser arrangement **712** is shown in further detail in FIG. 7A. The components of the TOSA arrangement **206**, such as LD **402**, can directly mount to the body of the associated TOSA module, or indirectly via an LD submount **404**, such as shown. The LD submount **404** can support components of each laser arrangement and provide electrical traces and other circuitry to support TOSA operations. Note the LD submount **404** may also couple directly to the body of the TOSA module, or indirectly by way of one or more baseplates, such as base plate **709** shown more clearly in FIG. 7A.

The LD **402** can be implemented as a distributed feedback lasers (DFBs), Vertical External-cavity Surface-emitting lasers (VECSEL) or other suitable laser devices. Preferably, the LD **402** is implemented as an electro-absorption modulator laser (EML). In an embodiment, the LD **402** can be uncooled (e.g., operate without an associated thermoelectric cooler). Instead, the LD **402** is in thermal communication

with the body of the TOSA module to dissipate heat. In addition, the body of the TOSA module may also be in thermal communication with the transceiver substrate **202** via the step **211** to further increase heat dissipation. Accordingly, in an embodiment each TOSA module can provide a thermal communication path **311** that extends between each LD and the transceiver substrate **202** by way of an associated LD submount, TOSA body, and the step **211** of the transceiver substrate **202**.

Continuing with reference to FIGS. 3-5, the components of each laser arrangement may be disposed coaxially, or substantially coaxially and be aligned with a longitudinal center line of a corresponding optical coupling receptacle (See FIG. 2). Each TOSA module of the TOSA arrangement **206** may therefore also be referred to as cuboid-type coaxial TOSA assemblies, or simply coaxial TOSA assemblies. Notably, cuboid-type TOSA bases allow for each laser assembly to be mounted in close proximity with adjacent cuboid-type TOSAs, e.g., directly contacting each other in a side-by-side relationship. Alternatively, spacing between the cuboid-type TOSA bases can provide for thermal isolation between adjacent TOSA modules (e.g., based on an air gap) while ensuring a relatively small overall footprint for the TOSA arrangement **206**.

In operation, each TOSA module **205-1** to **205-4** of the TOSA arrangement **206** can emit associated channel wavelengths and launch the same along optical fibers **209**, for example. Associated MPDs monitor and ensure nominal power for each of the TOSA modules **205-1**, **205-4**. As discussed above, each of the TOSA modules includes at least a LD, e.g., LD **402**, and at least one corresponding monitor photodiode (MPD), e.g., provided by MPD module **252**, to monitor the optical output power. As shown in FIG. 3, for example, the MPD module **252** optically aligns with a back surface of the LD **402** to receive and measure a small percentage of light emitted therefrom, e.g., 1-3%. Laser threshold current and slope efficiency are both functions of temperature and aging time. To maintain nominal optical output power, the electrical bias current and modulation current applied to the laser may be varied to compensate the change brought about by the variations in temperature and/or aging time. The optical transceiver module **200** can vary the current applied to the LD **402** based on the measured light to, for instance, maintain a stable output power based on an average output current of the MPD module **252**.

Referring to FIGS. 6A-6C, an example monitor photodiode submount **610** suitable for use with the MPD module **252** is shown in accordance with an embodiment. The monitor photodiode (MPD) submount **610** is configured to couple to and align a MPD **251** with an associated laser diode, as discussed above. The MPD submount **610** comprises a base **617** having a plurality of sidewalls to provide at least one mounting surface for supporting an MPD and supporting circuitry and at least one mating surface for coupling to an associated transceiver substrate. The base **617** can comprise, for instance, Silicon (Si), or any other non-conductive suitably rigid material. The base **617** may be formed monolithically from a single piece of material or from multiple pieces. While the following discussion includes reference to disposing/patterning metallic material on to a non-conductive base, e.g., formed from Si to provide electrically conductive paths, the base **617** may be at least partially formed from a conductive material such as a metal to provide integrated traces. In this instance, multiple independent electrical traces/paths may be provided by disposing an electrical insulating layer therebetween.

Continuing on, at least one sidewall defining the base **617** of the submount **610** provides a mounting surface **609** for coupling to and supporting MPD **251**, such as shown. At least one sidewall defining the base **617** of the submount **610** further provides mating surface **614** for mounting to and being supported by TOSA connecting pads, as will be discussed in greater detail below. As shown, the mounting surface **609** extends substantially transverse relative to the mating surface **614** to provide a vertical mounting orientation for the MPD **251**.

The base **617** further provides at least first and second electrically conductive paths **611**, **613** disposed along multiple sidewalls of the base **617** using a plurality of conductive traces disposed/patterned thereon. In particular, the first electrically conductive path **611** is collectively provided by at least first and second conductive traces **612-1**, **612-2** (or conductive segments) disposed on the base **617**. Likewise, the second electrically conductive path **613** is collectively provided by at least third and fourth conductive traces **612-3** and **612-4** (or conductive segments) disposed on the base **617**. Patterning of the conductive traces **612-1** to **612-4** can comprise deposition of one or more layers of metallic material such as copper, silver, or other suitable material on to sidewalls of the base **617**.

At least a portion of the first conductive trace **612-1** defines the mounting surface **609** for both physically and electrically coupling to the MPD **251**. Further, the first conductive trace **612-1** includes a region with a relatively rectangular profile having a width that is about 1.2× to 1.3× the width of the MPD **251**. This rectangular profile may be dimensioned such that corner(s) of the same get disposed at substantially a center of the mounting surface **609**. Alignment of the MPD **251** relative to the base **617**, and more importantly relative to an associated laser diode, may therefore be initially accomplished along the X, Y and Z axis by ensuring that the edges **619-1** and **619-2** of MPD **251** mount substantially flush with a far edge of rectangular pad provided by the first conductive trace **612-1**. Stated differently, alignment of MPD **251** can include mounting the same at a predetermined position on the first conductive trace **612-1** such that edges **619-1** and **612-2** extend parallel with the edges defining the rectangular pad and include a relatively uniform gap therebetween measuring about 0 to 100 microns. The first conductive trace **612-1** may therefore provide a visual alignment indicator, e.g., in the form of a rectangular pad or other regular or non-regular geometric shape, to provide a visual representation of a predefined mounting location for the MPD to simplify mounting and alignment of the same.

The above-discussed mounting and alignment of MPD **251** on to the MPD submount **610** can occur prior to attachment to the transceiver substrate **202** (FIG. 2). The MPD submount **610** may therefore get mounted to the transceiver substrate **202** with the MPD **251** being aligned along at least the X and Z axis with the associated laser diode. Alignment along the Y axis can include simply shifting the MPD submount **610** laterally until nominal optical coupling with an associated laser diode gets achieved.

Continuing on, the first conductive trace **612-1** extends towards the transceiver substrate **202** when the MPD submount is coupled thereto. The first conductive trace **612-1** also extends substantially transverse relative to the first mounting surface **245** of substrate **202** when coupled thereto (See FIG. 3). The first conductive trace **612-1** then transitions to the second conductive trace **612-2** based on an edge/intersection between associated sidewalls of the base

617. The second conductive trace **612-2** extends substantially transverse relative to the mounting surface **609**, and substantially parallel relative to the first mounting surface **245** of the transceiver substrate **202** when coupled thereto (See e.g., FIGS. 3-5).

As further shown, third and fourth conductive traces **612-3** and **612-4** are disposed on the base **617** to collectively define a second electrically conductive path to electrically couple the MPD **251** to the transceiver substrate **202**. The third conductive trace **612-3** is disposed on the mounting surface **609** and is configured to electrically couple to the MPD **251** via, for instance, wire bonding such as shown. The third conductive trace **612-3** extends towards the transceiver substrate **202** when the MPD submount **610** is coupled thereto. The third conductive trace **612-3** transitions to the fourth conductive trace **612-4** at an edge/intersection between sidewalls of the base **617**. The fourth conductive trace **612-4** extends substantially transverse relative to the mounting surface **609** and substantially parallel relative to the first mounting surface **245** of the transceiver substrate **202**.

The first and second conductive paths **611**, **613** therefore include at least one region/segment that extend substantially in parallel, and proximate, to an interface formed between the mating surface **614** and the first mounting surface **245** of the transceiver substrate **202** when the MPD submount **610** is coupled thereto. As discussed in greater detail below, the first and second conductive paths **611**, **613** can be electrically coupled to the transceiver substrate **202** utilizing a conductive epoxy or other conductive material that can be disposed around MPD submount **610**.

The MPD **251** can comprise a surface MPD having a detecting surface/region **603** having a receiving area **602** that is configured to be optically coupled with an associated laser diode by being aligned along the X, Y and Z axis. In particular, alignment includes the receiving area being disposed at a position that intersects with an optical path extending from a back surface of the associated laser diode towards the MPD. An anode **604** is disposed on the detecting surface **603**. A cathode (not shown) of the MPD **251** is provided on a surface opposite the detecting surface **603**. The MPD **251** mounts (e.g., directly) on the first conductive trace **612-1**, with the associated cathode electrically connected to the first conductive path **611**. The anode **604** electrically couples to the second conductive path **613** by wire bonding, for instance.

As shown in FIGS. 6A-6C, the body **617** of the MPD submount **610** can include channels/notches **631-1**, **631-2**. The channels **631-1**, **631-2** extend substantially transverse relative to mounting surface **609** and include a curved/arcuate profile (such as shown). Other shapes and configurations for the channels **631-1**, **631-2** are within the scope of this disclosure. As further shown, the second conductive trace **612-2** and the fourth conductive trace **612-4** are at least partially disposed on the channels **631-1**, **631-2**. The channels **631-1**, **631-2** can advantageously facilitate flow and adhesion of a layer of epoxy **509** (FIG. 5) to securely attach the MPD submount **610** to an associated transceiver substrate, e.g., transceiver substrate **202**. In addition, the channels **631-1**, **631-2** reduce the overall footprint of the mating surface **614** by providing a taper, and by extension, reducing the overall footprint of the MPD submount **610** when coupled to the transceiver substrate **202** (See FIG. 5). The channels **631-1**, **631-2**, may thus define a tapered region that at least partially defines the mating surface **614**.

When the MPD submount **610** mounts to the transceiver substrate **202** via mating surface **614**, conductive epoxy **509**

can flow into the channels **631-1**, **631-2** to securely attached the MPD submount **610** at a predetermined position, as discussed further below. The rounded profile/shape of the channels **631-1**, **631-2** can encourage increased adhesion and allow for a relatively larger amount of conductive epoxy to be utilized and substantially confined without the same inadvertently contacting adjacent conductive pads/traces. Note that while the embodiment of FIGS. 6A-6C show two channels **631-1**, **631-2**, this disclosure is not limited in this regard. An MPD submount consistent with the present disclosure can have a single channel, or a plurality of channels (as shown), or no channels depending on a desired configuration.

As shown in FIG. 6C, the first and second conductive paths **611**, **613** can also include fifth and sixth conductive traces **612-5**, **612-6**, respectively. The fifth and sixth conductive traces **612-5**, **612-6** can be disposed on back surface **616**, with back surface **616** being disposed opposite the mounting surface **609**. In this embodiment, the fifth and sixth conductive traces **612-5**, **612-6** can further increase electrical conductivity via the conductive epoxy and can balance bonding stresses applied to the MPD submount **610**.

Referring back to FIGS. 3-5, with additional reference to FIGS. 6A-6C, the MPD submount **610** is shown implemented as MPD module **252**. These MPD module **252** is configured to be disposed on the TOSA connector pads **423**, **424**, and when coupled thereto, an interface **504** gets formed between the MPD module **252** and the surfaces defining the transceiver substrate **202** (See FIG. 5). A layer of conductive epoxy **509**, e.g., silver epoxy, may be disposed along the interface **504** between MPD module **252** and surfaces defining the transceiver substrate **202**, and in particular, the connector pads **423**, **424**.

Therefore, the first and the second conductive paths **611**, **613** (FIG. 6A) electrically couple to a pad/trace of the transceiver substrate based at least in part on the layer of conductive epoxy **509**. Minor adjustment to MPD orientation along the Y axis, e.g., relative to an associated laser diode, can be achieved while the layer of conductive epoxy **509** cures, thus allowing for greater tolerances and multiple manufacturing phases to occur at potentially the same time. To avoid or otherwise reduce reflection losses, the receiving area **602** may be disposed at an angle with respect to the light path of the laser diode. The angle may be, for example, 0-15°, and preferably about 8° relative to normal.

Stepped Profile Architecture

Turning to FIG. 7A an enlarged cross-sectional view of the substrate **202** is shown in accordance with an embodiment. Note, the embodiment of FIG. 7A shows a laser arrangement having a vertically-mounted monitored photodiode, as discussed above. However, the stepped profile is equally applicable to other TOSA configurations including designs where an MPD is mounted to the TOSA body (e.g., See FIG. 7B).

As shown in FIG. 7A, the first component mounting surface **245** defines at least a portion of a first mounting region to allow for mounting of components and to provide traces for electrical interconnection with external circuitry. The first mounting region can therefore extend from the electrical coupling end **207** to a second mounting region disposed at the optical coupling end **203**.

The second mounting region is defined at least in part by the step **211**. The step **211** defines at least a portion of the stepped profile which can simplify alignment and coupling processes for TOSA modules, as discussed above. The stepped profile, and in particular, step **211** is defined at least in part by a recessed TOSA mounting surface **702**, which

11

may be referred to herein as simply a recessed mounting surface. The recessed mounting surface **702** is offset/recessed from the first component mounting surface **245** by a first offset distance (OD1). The offset distance OD1 measures between 10 and 50 microns, and preferably, 10-20 microns

The stepped profile may therefore be provided by the recessed TOSA mounting surface **702** extending substantially parallel with the first component mounting surface **245** and substantially transverse relative to vertical surface **704**, with the vertical surface **704** adjoining the recessed mounting surface **702** and the first component mounting surface **245**. The overall height of vertical surface **704** can be predetermined to establish the first offset distance OD1. As shown in FIGS. 2 and 7A, the first mounting region is shown as the portion of the substrate **202** having a first overall width W1. The first mounting region preferably includes a uniform width, or may vary along the longitudinal axis **250** (See FIG. 2) up to a maximum width equal to W1. On the other hand, the second mounting region is shown as the portion of the substrate **202** having a second overall width W2, with the second overall width W2 being less than the first overall width. The second mounting region also includes, preferably, a uniform width although this disclosure is not limited in this regard and the second overall width W2 can vary along the longitudinal axis up to a maximum width equal to W2.

As further shown in FIG. 7A, the first TOSA module **205-1** includes a body **706** (or base) configured to securely mount, e.g., edge mount, to the second mounting region of the substrate **202**. The body **706** includes a plurality of sidewalls that provide a substrate mating surface **708-1** and a component mounting surface **708-2**. The substrate mating surface **708-1** is disposed opposite the component mounting surface **708-2**, and in the embodiment shown in FIGS. 7A-7B, the component mounting surface is accessible via an opening **710** defined by sidewalls of the body **706** that extend substantially transverse from the component mounting surface **708-2**.

Thus, the recessed TOSA mounting surface **702** underlies and supports at least a portion of the substrate mating surface **708-1**, and thus by extension, the body **706** of the at least one TOSA module **205-1**. In an embodiment, epoxy or other adhesive material may be disposed between the recessed TOSA mounting surface **702** and the substrate mating surface **708-1** to securely attach the body **706** to the substrate **202**, although other attachment methods are within the scope of this disclosure such as welding. In this embodiment, the stepped profile operates, in a general sense, as a dam to prevent epoxy from contacting other surfaces such as the substrate mating surface **708-1**. Accordingly, the stepped profile also aids in containing and confining epoxy during manufacturing, which can reduce component failure and the time required for post-processing stages to remove excess epoxy.

The recessed TOSA mounting surface **702** can include one or more layers of metallic material disposed thereon (See FIG. 7B), e.g., such as Gold (Au) or Copper (Cu), to increase thermal communication between the TOSA module **205-1** and the substrate **202** and/or to allow for attachment via welding/soldering.

Turning to FIG. 7B, with additional reference to FIG. 7A, the body **706** includes at least one laser arrangement **712** mounted to the component mounting surface **708-2** of the body **706**. As shown, the laser arrangement **712** includes a laser diode driver **714**, a laser diode **716**, a monitor photodiode **718** and a focus lens **720**. The laser arrangement **712**

12

may include more or fewer active and/or passive optical components depending on a desired configuration, and the embodiment shown in FIG. 7B is not intended to be limiting.

As further shown, the at least one laser arrangement **712** mounts to the body **706**, and more particularly, the component mounting surface **708-2** by way of a submount **722** and optional base plate **709**. The submount **722** can provide traces/terminals for electrical connectivity with components of the at least one laser arrangement **712**. The overall height H1 of the submount **722** (e.g., including the base plate **709**) may therefore measure substantially equal to or greater than the first offset distance OD1. Accordingly, an invisible line drawn at the first component mounting surface **245**, and parallel thereto, can intersect with the submount **722** and/or at least one component of the at least one laser arrangement **712** such as the LDD **714** and LD **716**.

Stated differently, the submount **722** vertically displaces the components of the at least one laser arrangement **712** relative to the component mounting surface **708-2** of the body **706**, e.g., by overall height H1, but the vertical displacement gets 'offset' based on stepped profile of the substrate **202**, and more particularly, the first offset distance (OD1) of the recessed TOSA mounting surface **702** relative to the first component mounting surface **245** of the substrate **202**. Stated simply, the recessed TOSA mounting surface **702** gets countersunk relative to the first component mounting surface **245**. The overall height H2 between the first component mounting surface **245** and a top surface of the submount **722** that supports the optical components of the at least one laser arrangement **712** is less than 400 microns, and preferably, less than 200 microns.

Accordingly, relatively short electrical interconnects, e.g., wire bonds **724**, electrically couple the LDD **714** to RF terminals/traces **726** disposed on the first component mounting surface **245**. In the shown embodiment, the overall length of each of the wire bonds **724** measures between 400 and 500 microns, and preferably, less than 400 microns. In addition, each of the wire bonds **724** extend at an angle θ relative to the first component surface **245**, with angle θ being less than or equal to 45 degrees.

Substrates having stepped profiles consistent with the present disclosure advantageously position components such as LDDs in close proximity with supporting terminals of the substrate **202**. By way of contrast, consider the embodiment of FIG. 8 which shows a substrate and TOSA modules with a substantially similar size and dimension to that of the embodiments shown in FIGS. 7A-7B. However, the stepped profile of the substrate **202** shown in FIGS. 7A and 7B allows for wire bonds **724** to be shortened/reduced in length by up to and exceeding 50% relative to wire bonds **808** of FIG. 8. Moreover, the wire bonds **724** extend at a relatively acute angle θ to provide a low-profile implementation. On the other hand, the wire bonds **808** shown in FIG. 8 extend from substrate **804** at roughly a 90 degree angle, which increases the risk of inadvertent contact and damage. In any event, this reduction in wire bond length translates directly to improved signal quality, and in addition, enables maximum transmission speeds otherwise unachievable with longer electrical interconnections.

In accordance with an aspect of the present disclosure an optical subassembly module is disclosed. The optical subassembly module comprising a substrate having an electrical coupling end for electrically coupling to external circuitry and an optical coupling end for launching at least one channel wavelength on a waveguide, the electrical coupling end disposed opposite the optical coupling end, a first mounting region at the electrical coupling end of the sub-

13

strate to provide traces for electrical interconnection with the external circuitry, the first mounting region defined at least in part by a component mounting surface provided by a sidewall of the substrate, a second mounting region at the optical coupling end of the substrate to couple to and support at least one transmitter optical subassembly (TOSA) module via a recessed TOSA mounting surface, the recessed TOSA mounting surface being disposed offset from the component mounting surface by first offset distance (OD1) based on a stepped profile, the stepped profile defined at least in part by the recessed TOSA mounting surface extending substantially parallel with the component mounting surface and substantially transverse relative to a vertical surface adjoining the recessed TOSA mounting surface and the component mounting surface.

In accordance with another aspect of the present disclosure an optical transceiver is disclosed. The optical transceiver comprising a transceiver substrate having an optical coupling end disposed opposite an electrical coupling end, at least one component mounting surface provided by the transceiver substrate extending between the optical coupling end and the electrical coupling end, and a recessed transmitter optical subassembly (TOSA) mounting surface at the optical coupling end of the substrate for coupling to and supporting at least one TOSA module, and wherein the recessed TOSA mounting surface extends substantially parallel with the at least one component mounting surface and substantially transverse relative to a vertical surface adjoining the recessed TOSA mounting surface and the at least one component mounting surface, at least one TOSA module coupled to optical coupling end of the transceiver substrate, and a receiver optical subassembly arrangement coupled to the transceiver substrate.

While the principles of the disclosure have been described herein, it is to be understood by those skilled in the art that this description is made only by way of example and not as a limitation as to the scope of the disclosure. Other embodiments are contemplated within the scope of the present disclosure in addition to the exemplary embodiments shown and described herein. Modifications and substitutions by one of ordinary skill in the art are considered to be within the scope of the present disclosure, which is not to be limited except by the following claims.

What is claimed is:

1. An optical subassembly module, the optical subassembly module comprising:

a substrate having an electrical coupling end for electrically coupling to external circuitry and an optical coupling end for launching at least one channel wavelength on a waveguide, the electrical coupling end disposed opposite the optical coupling end;

a first mounting region at the electrical coupling end of the substrate to provide traces for electrical interconnection with the external circuitry, the first mounting region defined at least in part by a component mounting surface provided by a sidewall of the substrate;

a second mounting region at the optical coupling end of the substrate to couple to and support at least one transmitter optical subassembly (TOSA) module via a recessed TOSA mounting surface, the recessed TOSA mounting surface being disposed offset from the component mounting surface by first offset distance (OD1) based on a stepped profile, the stepped profile defined at least in part by the recessed TOSA mounting surface extending substantially parallel with the component mounting surface and substantially transverse relative

14

to a vertical surface adjoining the recessed TOSA mounting surface and the component mounting surface; and

wherein the vertical surface provides a mechanical stop to engage a surface of the at least one TOSA module and limit travel of the at least one TOSA module along one or more axis, and wherein the second mounting region at the optical coupling end of the substrate is configured to edge mount to the at least one TOSA module.

2. The optical subassembly module of claim 1, wherein the optical subassembly module further comprises the at least one TOSA module edge mounted to the second mounting region of the substrate, the at least one TOSA module having a body that includes a component mounting surface to couple to a laser arrangement and a substrate mating surface disposed opposite the component mounting surface of the body, the substrate mating surface of the body to couple to the recessed TOSA mounting surface of the optical coupling end of the substrate and extend from the substrate along an axis that is substantially parallel with a longitudinal axis of the substrate.

3. The optical subassembly module of claim 2, wherein the substrate mating surface of the body is vertically offset from the component mounting surface of the substrate by the first offset distance.

4. The optical subassembly module of claim 2, wherein the laser arrangement of the at least one TOSA module comprises a laser diode driver (LDD) disposed on the component mounting surface of the TOSA module.

5. The optical subassembly of claim 4, wherein the LDD is electrically coupled to radio frequency (RF) terminals disposed on the component mounting surface of the substrate adjacent the optical coupling end via a plurality of wire bonds.

6. The optical subassembly of claim 5, wherein each of the plurality of wire bonds extend from the component mounting surface of the substrate at an angle less than or equal to 45 degrees.

7. The optical subassembly of claim 5, wherein each of the plurality of wire bonds has an overall length of less than 500 microns.

8. The optical subassembly of claim 1, wherein the second mounting region is configured to couple to and support a plurality of TOSA modules.

9. The optical subassembly of claim 1, wherein the substrate is a printed circuit board, and wherein the optical subassembly is a multi-channel optical transmitter or multi-channel optical transceiver capable of transmitting multiple channel wavelengths.

10. An optical transceiver, the optical transceiver comprising:

a transceiver substrate having an optical coupling end disposed opposite an electrical coupling end;

at least one component mounting surface provided by the transceiver substrate extending between the optical coupling end and the electrical coupling end; and

a recessed transmitter optical subassembly (TOSA) mounting surface at the optical coupling end of the substrate for coupling to and supporting at least one TOSA module, and wherein the recessed TOSA mounting surface extends substantially parallel with the at least one component mounting surface and substantially transverse relative to a vertical surface adjoining the recessed TOSA mounting surface and the at least one component mounting surface;

at least one TOSA module edge mounted to the optical coupling end of the transceiver substrate, wherein the

15

vertical surface provides a mechanical stop to engage a surface of the least one TOSA module and limit travel of the at least one TOSA module along one or more axis; and

a receiver optical subassembly arrangement coupled to the transceiver substrate. 5

11. The optical transceiver of claim 10, further comprising radio frequency (RF) terminals disposed on the at least one component mounting surface proximate to the optical coupling end, wherein the at least one TOSA module electrically couples with the RF terminals via one or more wire bonds. 10

12. The optical transceiver of claim 10, wherein the recessed TOSA mounting surface is vertically offset relative to the at least one component mounting surface of the transceiver substrate by a first offset distance. 15

13. The optical transceiver of claim 10, wherein the at least one TOSA module comprises a plurality of TOSA modules, and wherein each TOSA module of the plurality of TOSA modules include a submount and a laser diode driver (LDD) coupled to the submount. 20

* * * * *

16