



Joint Collaborative Team on Video Coding (JCT-VC)
of ITU-T SG16 WP3 and ISO/IEC JTC1/SC29/WG11
5th Meeting: Geneva, CH, 16-23 March, 2011

Document: JCTVC-E603

Title: **WD3: Working Draft 3 of High-Efficiency Video Coding**

Status: Output Document of JCT-VC

Purpose: Working Draft of HEVC

Author(s) or Contact(s):

Thomas Wiegand	Email: thomas.wiegand@hhi.fraunhofer.de
Fraunhofer HHI / TU Berlin	
Woo-Jin Han	Email: wjhan.han@samsung.com
Samsung Electronics	
Benjamin Bross	Email: benjamin.bross@hhi.fraunhofer.de
Fraunhofer HHI	
Jens-Rainer Ohm	Email: ohm@ient.rwth-aachen.de
RWTH Aachen	
Gary J. Sullivan	Email: garysull@microsoft.com
Microsoft	

Source: Editor

Abstract

Working Draft 3 of High-Efficiency Video Coding.

Ed. Notes (WD3):

- Added Residual coding CABAC syntax and semantics
- Added Zig-zag scanning process
- Added CABAC Binarization processes
- Incorporated MV coding (JCTVC-E481)
- Incorporated Compression of reference indices (JCTVC-E059)
- Incorporated Zero merge candidate (JCTVC-E146)
- Incorporated Intra mode coding (JCTVC-E088/E131) (Inserted by TK 31/3/2011 with notes)
- Fixed the CABAC coefficients syntax, semantics and inverse scanning process
- Incorporated CABAC coeffs (JCTVC-E253)
- Moved the EGk binarization from the UEGk subclause in a separate subclause
- Added text representing CABAC entropy coding context initialisation
- Added text representing CABAC entropy coding context derivation.
- Mode-dependent 3- scan for intra (JCTVC-D393)
- Incorporated CABAC: Context size reduction (JCTVC-E227/E489)
- Incorporated CABAC: significance map coding simplification (JCTVC-E227/E338/E344/E494)
- Incorporated CABAC: Contexts for MVD (JCTVC-E324)
- Incorporated initial draft of CAVLC text
- CAVLC for 16x16 & 32x32 (JCTVC-E383)
- CAVLC table size reduction (JCTVC-E384)
- CAVLC for RQT (JCTVC-E404)
- CAVLC: counters (JCTVC-E143)
- CAVLC: Intra prediction mode coding in LCEC (JCTVC-D366)
- CAVLC: Inter prediction mode coding in LCEC (JCTVC- D370)
- CAVLC: 4x4 and 8x8 transform coefficient coding in LCEC (JCTVC- D374)
- Block-based ALF (JCTVC-E046/E323)
- ALF parameters to PPS (JCTVC-E045)
- Parallel deblocking (JCTVC-E496/E181/E224)
- Clipping for bi-pred averaging (JCTVC-E242)
- Reference sample padding (JCTVC-E488)
- Transformation processes are replaced by [TBD] mark (meeting note, JCTVC-E243)

HEVC i

- Sub-LCU-level dQP (JCTVC-E051/E220)
- Temporal layer switching and reference list management based on temporal_id (JCTVC-E279/D081/D200)
- Improved text of entropy slice (JCTVC-D070) [Ed. (WJ): the term entropy slice is replaced by lightweight slice according to proponent's text]
- Slice independent deblocking and adaptive loop filtering (JCTVC-D128)
- Fine-granularity slices (JCTVC-E483)
- PCM mode (JCTVC-E057 and JCTVC-E192)
- CAVLC: Inter pred coding (JCTVC-E381)
- CAVLC: Combined coding of inter prediction direction and reference frame index (JCTVC-D141)
- 4x4 DST (JCTVC-E125)
- Planar mode (JCTVC-E321)
- Luma-based chroma intra prediction (JCTVC-E266)
- Modification of DC predictor (JCTVC-E069)
- Bug in mapping table and the corresponding text for mostProbableIntra was fixed. (64x64 uses 3-directions, but the table was specified for 5-directions)
- Non-existing cases of Intra_DC, Intra_Planar and Intra_FromLuma are removed (due to reference sample padding, JCTVC-E488)

Ed. Notes (WD2):

- Incorporated Partial Merging according to JCTVC-D441
 - removed direct mode
 - moved merge to prediction_unit and added candidates
 - added partial merge restrictions
 - inter NxN partitioning only for smallest coding_unit
- Updated transform_tree and transform_coeff syntax
- Added transform_coeff to coding_unit syntax (Fix)
- Incorporated intra NxN partitioning only for smallest coding_unit according to JCTVC-D432
- Incorporated modified temporal motion vector prediction according to JCTVC-D164
- Incorporated simplified motion vector prediction according to JCTVC-D231
 - removed median
 - removed pruning process
 - changed the selection manner of left/top predictor
- 8-tap luma interpolation filter according to JCTVC-D344
- 4-tap chroma interpolation filter according to JCTVC-D347
- Improved deblocking filter text according to JCTVC-D395
- IBDI syntax is removed
- Updated syntax and semantics
 - Two tool-enabling flags (adaptive_loop_filter_enabled_flag and cu_qp_delta_enabled_flag) are added in SPS according to software. However, low_delay_coding_enabled_flag is not added – it could be handled by more general reference management scheme. merging_enabled_flag is not added – partial merging (JCTVC-D441) was adopted thus merging cannot be turned off any more. amvp_mode[] is not added since amvp cannot be turned off any more due to absence of median predictor (JCTVC-D231). Note that software has all switches.
 - cu_qp_delta (coding unit layer), syntax and semantics are added. (JCTVC-D258)
 - collocated_from_l0 (slice header), syntax and semantics are added.
- Clean decoding refresh (CDR) (JCTVC-D234).
- Temporal motion vector memory compression (JCTVC-D072)
- Constrained intra prediction (JCTVC-D086)
- Mode-dependent intra smoothing (JCTVC-D282)
- Merging chroma intra prediction process into luma intra prediction process
- Combined reference list (JCTVC-D421)
- Chroma intra prediction mode reordering (JCTVC-D255/D278/D166)
- Adaptive loop filter text is added
- Entropy slice is added (JCTVC-D070)
- High precision bi-directional averaging (JCTVC-D321)
- Reduction of number of intra prediction modes for 64x64 blocks (JCTVC-D100)
- Misc.
 - TPE bits are reduced from 4 to 2
 - Clipping is applied to (temporally) scaled mv – revisit

Ed. Notes (WD1):

- Incorporated the decisions on high-level syntax according to JCTVC-B121
- Incorporated text from JCTVC-B205revision7
- Incorporated text from JCTVC-C319 (as found to be stable)
- Revised coding tree, coding unit and prediction unit syntaxes (coding tree syntax is newly added. needs to be confirmed)
- Initial drafting of decoding process of coding units in intra prediction mode (luma part, JCTVC-B100 and JCTVC-C042)
- Initial drafting of decoding process of coding units in inter prediction mode
- Initial drafting of scaling and transformation process
- Added text, transform 16T and 32T
- Initial drafting of deblocking process
- Improving the text, derivation process for motion vector components and reference indices
- Added text, boundary filtering strength

Open issues:

- Substantial portions of JCTVC-B205 have not been imported so far, as they require significant editorial work
- Should support for monochrome, 4:2:2 and 4:4:4 (with and w/o separate color planes) be included from the start? Currently, it has been left in the text as it doesn't seem to affect much text.
- Handling of the term "**frame**". We are currently leaning towards changing all occurrences of "**frame**" to "picture" (removed or marked all occurrences of "field")
- Large size table (de-scaling matrices) is not inserted yet.
- Slice-header syntaxes and their semantics are not completed yet. Also possible modifications that maybe necessary because of larger treeblocks (64x64) compared to macroblocks (16x16) are not yet considered.
- Text representing entropy coding named as "LCEC" are missing. The name LCEC needs to be adjusted as it proposes a property ("Low Complexity"). Currently, there is a place holder with CAVLC.
- Clipping is applied to temporally scaled motion vector in 48.4.2.1.7. Do we need this? (c.f. AVC seems not)
- SPS- and slice-level syntax items are significantly different from software in terms of both meaning and position. Needs to be unified.
- Use of bin string and bit string should be consistent.
- ~~Luma-based chroma intra prediction (JCTVC-E266)~~
- ~~Planar mode (JCTVC-E321)~~
- ~~4x4 DST (JCTVC-E125)~~
- MD5 hash (JCTVC-E490)
- New additional loop filter (JCTVC-E049)
- ~~Modification of DC predictor (JCTVC-E069)~~
- ~~CAVLC: Inter-pred coding (JCTVC-E381)~~
- ~~CAVLC: Combined coding of inter prediction direction and reference frame index (JCTVC-D141)~~
- ~~entropy slice – improved text (JCTVC-D070)~~
- ~~slice independent deblocking and adaptive loop filtering (JCTVC-D128)~~
- ALF coefficient derivation from syntax elements
- SPS/PPS/slice-header syntax tables (with synchronization of software)
- ~~PCM mode (JCTVC-E057 and JCTVC-E192)~~
- ~~Improve text quality by considering: Add CU, PU and TU definitions and replace treeblock with LCUs strict use of terms "unit" and "block" – block = a rectangular 2D array (one component), unit = collective term for specifying information for both luma and chroma. Don't use the term 'unit' by itself – always use the term 'unit' with prefix – coding unit, prediction unit or transform unit.~~
- ~~Syntax functions cuAddress and granularity_block_boundary (fine granularity slices, JCTVC-E483) are missing~~
- ~~Do we need SPS flag for disabling PCM mode? Currently PCM mode is turned on for all cases.~~
- ~~Software seems to have SPS syntax to turn on/off combined reference list (JCTVC-D421), but currently text does not.~~
- ~~CAVLC: Combined coding of inter prediction direction and reference frame index (JCTVC-D141) – corresponding software implementation seems to have more things (check of neighbouring reference indices) which is not described in JCTVC-D141, thus the relevant text was not included yet.~~
- ~~Both variables IntraPredMode and IntraPredModeC are used in the syntax table but the actual derivations are specified in the decoding process. Maybe it's better to move them to the semantics section.~~
- ~~Binarization of intra_chroma_pred_mode reflecting codeword switching and luma-based chroma intra prediction (JCTVC-E266) is missing.~~
- ~~Clarification on the use of intra_chroma_pred_mode and IntraPredModeC is needed. The former specifies the syntax item to indicate how to determine the chroma intra prediction mode (IntraPredModeC) as 0 (to Intra_FromLuma), 1~~

[\(to Intra_Vertical\), 2 \(to Intra_Horizontal\), 3 \(Intra_DC or Intra_Planar\) or 4 \(re-use luma mode\). The latter specifies chroma intra prediction mode, which is actually mapped to the specific prediction process.](#)

CONTENTS

	<i>Page</i>
Abstract	i
0 Introduction	13+1
0.1 Prologue	13+1
0.2 Purpose	13+1
0.3 Applications	13+1
0.4 Publication and versions of this Specification	13+1
0.5 Profiles and levels	13+1
0.6 Overview of the design characteristics	14+2
0.7 How to read this Specification	14+2
1 Scope	15+3
2 Normative references	15+3
3 Definitions	16+3
4 Abbreviations	21+8
5 Conventions	22+9
5.1 Arithmetic operators	22+9
5.2 Logical operators	22+9
5.3 Relational operators	22+20
5.4 Bit-wise operators	23+20
5.5 Assignment operators	23+20
5.6 Range notation	23+20
5.7 Mathematical functions	23+20
5.8 Order of operation precedence	24+21
5.9 Variables, syntax elements, and tables	25+22
5.10 Text description of logical operations	26+23
5.11 Processes	27+24
6 Source, coded, decoded and output data formats, scanning processes, and neighbouring relationships	27+24
6.1 Bitstream formats	27+24
6.2 Source, decoded, and output picture formats	27+24
6.3 Spatial subdivision of pictures and slices	29+26
6.4 Inverse scanning processes and derivation processes for neighbours	30+27
6.4.1 Inverse treeblock scanning process	30+27
6.5 Zig-zag scanning array initialisation process	31+28
6.6 Scanning order array initialisation process	32+28
7 Syntax and semantics	32+29
7.1 Method of specifying syntax in tabular form	32+29
7.2 Specification of syntax functions, categories, and descriptors	33+30
7.3 Syntax in tabular form	35+32
7.3.1 NAL unit syntax	35+32
7.3.2 Raw byte sequence payloads and RBSP trailing bits syntax	36+33
7.3.2.1 Sequence parameter set RBSP syntax	36+33
7.3.2.2 Picture parameter set RBSP syntax	37+33
7.3.2.3 Supplemental enhancement information RBSP syntax	37+34
7.3.2.4 Access unit delimiter RBSP syntax	38+34
7.3.2.5 Filler data RBSP syntax	38+34
7.3.2.6 Slice layer RBSP syntax	38+35
7.3.2.7 RBSP slice trailing bits syntax	39+35
7.3.2.8 RBSP trailing bits syntax	39+35
7.3.3 Slice header syntax	40+36
7.3.3.1 Reference picture list modification syntax	41+37
7.3.3.2 Reference picture lists combination syntax	41+37
7.3.3.3 Decoded reference picture marking syntax	42+38
7.3.3.4 Adaptive loop filter parameter syntax	42+39

7.3.4	Slice data syntax	4540
7.3.5	Coding tree syntax	4641
7.3.6	Coding unit syntax	4741
7.3.7	Prediction unit syntax	4843
7.3.8	Transform tree syntax	5045
7.3.9	Transform coefficient syntax	5247
7.3.10	Residual coding CABAC syntax	5348
7.3.11	Residual coding CAVLC syntax	5348
7.3.12	Level and sign CAVLC syntax	5449
7.4	Semantics	5550
7.4.1	NAL unit semantics	5550
7.4.1.1	Encapsulation of an SODB within an RBSP (informative)	5752
7.4.1.2	Order of NAL units and association to coded pictures, access units, and video sequences	5853
7.4.2	Raw byte sequence payloads and RBSP trailing bits semantics	6257
7.4.2.1	Sequence parameter set RBSP semantics	6257
7.4.2.2	Picture parameter set RBSP semantics	6458
7.4.2.3	Supplemental enhancement information RBSP semantics	6559
7.4.2.4	Access unit delimiter RBSP semantics	6559
7.4.2.5	Filler data RBSP semantics	6559
7.4.2.6	Slice layer RBSP semantics	6659
7.4.2.7	RBSP slice trailing bits semantics	6659
7.4.2.8	RBSP trailing bits semantics	6660
7.4.3	Slice header semantics	6660
7.4.3.1	Reference picture list modification semantics	6962
7.4.3.2	Reference picture lists combination semantics	7063
7.4.3.3	Decoded reference picture marking semantics	7063
7.4.3.4	Adaptive loop filter parameter semantics	7266
7.4.4	Slice data semantics	7467
7.4.5	Coding tree semantics	7467
7.4.6	Coding unit semantics	7568
7.4.7	Prediction unit semantics	7669
7.4.8	Transform tree semantics	8071
7.4.9	Transform coefficient semantics	8172
7.4.10	Residual coding CABAC semantics	8273
7.4.11	Residual coding CAVLC semantics	8374
8	Decoding process	8475
8.1	NAL unit decoding process	8576
8.2	Slice decoding process	8576
8.2.1	Decoding process for picture order count	8576
8.2.1.1	Decoding process for picture order count type 0	8576
8.2.1.2	Decoding process for picture order count type 1	8576
8.2.1.3	Decoding process for picture order count type 2	8576
8.2.2	Decoding process for reference picture lists construction	8576
8.2.2.1	Decoding process for picture numbers	8677
8.2.2.2	Initialisation process for reference picture lists	8677
8.2.2.3	Modification process for reference picture lists	8878
8.2.2.4	Mapping process for reference picture lists combination in B slices	8980
8.2.3	Decoded reference picture marking process	9081
8.2.3.1	Sequence of operations for decoded reference picture marking process	9181
8.2.3.2	Decoding process for gaps in frame_num	9182
8.2.3.3	Sliding window decoded reference picture marking process	9182
8.2.3.4	Adaptive memory control decoded reference picture marking process	9182
8.3	Decoding process for coding units coded in intra prediction mode	9383
8.3.1	Derivation process for luma intra prediction mode	Error! Bookmark not defined,84
8.3.2	Derivation process for chroma intra prediction mode	9786
8.3.3	Decoding process for intra blocks	9886
8.3.3.1	Intra sample prediction	9987
8.4	Decoding process for coding units coded in inter prediction mode	10993
8.4.1	Inter prediction process	11093
8.4.2	Decoding process for prediction units in inter prediction mode	11195
8.4.2.1	Derivation process for motion vector components and reference indices	11296
8.4.2.2	Decoding process for inter prediction samples	123407

8.4.3	Decoding process for the residual signal of coding units coded in inter prediction mode.....	130114
8.4.3.1	Decoding process for luma residual blocks	131114
8.4.3.2	Decoding process for chroma residual blocks	132115
8.5	Scaling, transformation and array construction process prior to deblocking filter process.....	133116
8.5.1	Scaling and transformation process	133116
8.5.2	Inverse scanning process for transform coefficients	134117
8.5.3	Scaling process for transform coefficients	134117
8.5.4	Transformation process for scaled transform coefficients	134118
8.5.4.1	Transformation process for 4 samples	136118
8.5.4.2	Transformation process for 8 samples	136118
8.5.4.3	Transformation process for 16 samples	136118
8.5.4.4	Transformation process for 32 samples	136121
8.5.5	Array construction process.....	136128
8.6	In-loop filter process	137128
8.6.1	Deblocking filter process	137128
8.6.1.1	Derivation process of transform unit boundary	138129
8.6.1.2	Derivation process of prediction unit boundary.....	138129
8.6.1.3	Derivation process of boundary filtering strength	139130
8.6.1.4	Filtering process for coding unit.....	140131
8.6.2	Adaptive loop filter process	148136
8.6.2.1	Derivation process for filter coefficients	150136
8.6.2.2	Derivation process for filter index array for luma samples.....	151137
8.6.2.3	Filtering process for luma samples	152138
8.6.2.4	Filtering process for chroma samples	153139
9	Parsing process	154139
9.1	Parsing process for Exp-Golomb codes.....	154140
9.1.1	Mapping process for signed Exp-Golomb codes	156141
9.2	CAVLC parsing process for slice data.....	156142
9.2.1	Parsing process for VLC codes	156142
9.2.2	Initialisation process	158144
9.2.2.1	Counter initialisation for codeword index adaptive mapping	159144
9.2.2.2	Initialisation process for lastPosVlcNumIndex.....	159145
9.2.2.3	Initialisation process for lastPosTable	159145
9.2.2.4	Initialisation process for splitPredPartModeTable.....	159145
9.2.2.5	Initialisation process for intraModeTable	159145
9.2.2.6	Initialisation process for cbpSplitTransTable	160146
9.2.3	Codeword index mapping update process.....	160146
9.2.4	Parsing process for transform coefficient syntax elements	161147
9.2.4.1	Parsing process for last_pos_level_one	161147
9.2.4.2	Parsing process for level_minus2_and_sign	162148
9.2.4.3	Parsing process for run_level_one	162148
9.2.4.4	Parsing process for level.....	166152
9.2.4.5	Parsing process for cu_split_pred_part_mode	166152
9.2.4.6	Parsing process for rem_intra_luma_pred_mode	167153
9.2.4.7	Parsing process for cbp_and_split_transform.....	167153
9.3	CABAC parsing process for slice data	169154
9.3.1	Initialisation process	169155
9.3.1.1	Initialisation process for context variables.....	169155
9.3.1.2	Initialisation process for the arithmetic decoding engine.....	181165
9.3.2	Binarization process.....	182166
9.3.2.1	Unary (U) binarization process	187169
9.3.2.2	Truncated unary (TU) binarization process	187170
9.3.2.3	Truncated Rice (TR) binarization process	188170
9.3.2.4	k-th order Exp-Golomb (EGk) binarization process.....	188170
9.3.2.5	Concatenated unary/ k-th order Exp-Golomb (UEGk) binarization process	188171
9.3.2.6	Fixed-length (FL) binarization process.....	189171
9.3.2.7	Binarization process for cu_qp_delta.....	189171
9.3.2.8	Binarization process for pred_type	189171
9.3.2.9	Binarization process for rem_intra_luma_pred_mode.....	190172
9.3.2.10	Binarization process for coeff_abs_level_minus3	190172
9.3.3	Decoding process flow.....	191173
9.3.3.1	Derivation process for ctxIdx	191173

9.3.3.2	Arithmetic decoding process	202182
9.3.4	Arithmetic encoding process (informative)	208189
9.3.4.1	Initialisation process for the arithmetic encoding engine (informative)	208189
9.3.4.2	Encoding process for a binary decision (informative)	209190
9.3.4.3	Renormalization process in the arithmetic encoding engine (informative)	210191
9.3.4.4	Bypass encoding process for binary decisions (informative)	212193
9.3.4.5	Encoding process for a binary decision before termination (informative)	213194
9.3.4.6	Byte stuffing process (informative)	215196
Annex A	Profiles and levels	216197
A.1	Requirements on video decoder capability	216197
A.2	Profiles	216197
A.2.1	ABC profile	216197
A.3	Levels	216197
Annex B	Byte stream format	218199
B.1	Byte stream NAL unit syntax and semantics	218199
B.1.1	Byte stream NAL unit syntax	218199
B.1.2	Byte stream NAL unit semantics	218199
B.2	Byte stream NAL unit decoding process	219200
B.3	Decoder byte-alignment recovery (informative)	219200
Annex C	Hypothetical reference decoder	220201
C.1	Operation of coded picture buffer (CPB)	221202
C.1.1	Timing of bitstream arrival	221202
C.1.2	Timing of coded picture removal	221202
C.2	Operation of the decoded picture buffer (DPB)	221202
C.3	Bitstream conformance	221202
C.4	Decoder conformance	221202
Annex D	Supplemental enhancement information	222203
D.1	SEI payload syntax	222203
D.2	SEI payload semantics	222203
Annex E	Video usability information	223204
E.1	VUI syntax	223204
E.1.1	VUI parameters syntax	223204
E.2	VUI semantics	223204

LIST OF FIGURES

Figure 6-2 – Nominal vertical and horizontal locations of 4:2:2 luma and chroma samples in a picture [Ed. Re-draw figure]	2926
Figure 6-3 – Nominal vertical and horizontal locations of 4:4:4 luma and chroma samples in a picture [Ed. Re-draw figure]	2926
Figure 6-4 – A picture with 11 by 9 treeblocks that is partitioned into two slices	3027
Figure 7-1 – Structure of an access unit not containing any NAL units with nal_unit_type equal to 0, 7, 8, or in the range of 12 to 18, inclusive, or in the range of 20 to 31, inclusive	6156
Figure 8-2 – Intra prediction angle definition (informative)	10592
Figure 8-3 – Spatial neighbours that can be used as merging candidates (informative) illustrates the position of the spatial neighbours A, B, C and D relative to the current prediction unit	11699
Figure 8-4 – Spatial neighbours, that can be used to derive reference indices for temporal merging candidates, (informative) illustrates the position of the spatial neighbours A, B, C, D and E relative to the current prediction unit	117101
Figure 8-5 – Spatial motion vector neighbours	119103
Figure 8-6 – Integer samples (shaded blocks with upper-case letters) and fractional sample positions (un-shaded blocks with lower-case letters) for quarter sample luma interpolation	126109
Figure 8-8 Mapping between geometric position and luma adaptive loop filter index according to alfTap (informative)	153139

Figure 9-1 – Overview of the arithmetic decoding process for a single bin (informative).....	202185
Figure 9-2 – Flowchart for decoding a decision	204185
Figure 9-3 – Flowchart of renormalization.....	206187
Figure 9-4 – Flowchart of bypass decoding process.....	207188
Figure 9-5 – Flowchart of decoding a decision before termination.....	208189
Figure 9-6 – Flowchart for encoding a decision.....	210191
Figure 9-7 – Flowchart of renormalization in the encoder.....	211192
Figure 9-8 – Flowchart of PutBit(B).....	212193
Figure 9-9 – Flowchart of encoding bypass.....	213194
Figure 9-10 – Flowchart of encoding a decision before termination.....	214195
Figure 9-11 – Flowchart of flushing at termination.....	215196
Figure C-9-12 – Structure of byte streams and NAL unit streams for HRD conformance checks.....	220201
Figure C-9-13 – HRD buffer model.....	221202

LIST OF TABLES

Table 5-1 – Operation precedence from highest (at top of table) to lowest (at bottom of table).....	2525
Table 6-1 – SubWidthC, and SubHeightC values derived from chroma_format_idc and separate_colour_plane_flag.....	2826
Table 7-1 – NAL unit type codes, syntax element categories, and NAL unit type classes.....	5652
Table 7-2 – Meaning of primary_pic_type.....	6569
Table 7-3 – Name association to slice_type.....	6661
Table 7-4 – modification_of_pic_nums_idc operations for modification of reference picture lists.....	6964
Table 7-5 – Interpretation of adaptive_ref_pic_marking_mode_flag.....	7165
Table 7-6 – Memory management control operation (memory_management_control_operation) values.....	7266
Table 7-7 – Specification of alf_chroma_idc.....	7468
Table 7-8 – Specification of cu_split_pred_part_mode when log2CUsSize is greater than Log2MinCUsSize.....	7569
Table 7-9 – Specification of cu_split_pred_part_mode when log2CUsSize is equal to Log2MinCUsSize.....	7569
Table 7-10 – Name association to prediction mode and partitioning type.....	7670
Table 7-11 – Number of bins and number of mode for rem_intra_luma_pred_mode associated to PuSize.....	7770
Table 7-12 – Name association to inter prediction mode.....	7871
Table 7-13 – Specification of cbp_and_split_transform.....	8173
Table 7-14 – Specification of ScanType[log2TrafoSize – 2][IntraPredMode].....	8274
Table 7-15 – Specification of ScanTypeC[log2TrafoSize – 2][IntraPredModeC].....	8274
Table 8-1 – Specification of intraPredModeNum.....	9485
Table 8-2 – Specification of mapIntraPredMode5 and mapIntraPredMode9.....	9586
Table 8-3 – Specification of IntraPredModeC according to the values of intra_chroma_pred_mode and IntraPredMode[xB][yB].....	9887
Table 8-4 – Specification of intraPredMode and associated names.....	10089
Table 8-5 – Specification of intraFilterType[nS][IntraPredMode] for various prediction unit sizes.....	10290
Table 8-6 – Specification of intraPredOrder.....	10592
Table 8-7 – Specification of intraPredAngle.....	10593

Table 8-8 – Specification of invAngle.....	10693
Table 8-9 – Assignment of the luma prediction sample predSampleLXL[xL, yL].....	127112
Table 8-10 – Assignment of the chroma prediction sample predSampleLXc[xc, yc] for (X, Y) being replaced by (1, b), (2, c), (3, d), (4, e), (5, f), (6, g), and (7, h), respectively	130114
Table 8-11 – Derivation of threshold variables β and t_c from input Q.....	147136
Table 8-12 – Specification of horPos[i] according to alfTap for adaptive loop filter process of luma samples.....	152139
Table 8-13 – Specification of verPos[i] according to alfTap for adaptive loop filter process of luma samples	153139
Table 9-1 – Bit strings with "prefix" and "suffix" bits and assignment to codeNum ranges (informative).....	155141
Table 9-2 – Exp-Golomb bit strings and codeNum in explicit form and used as ue(v) (informative).....	155142
Table 9-3 – Assignment of syntax element to codeNum for signed Exp-Golomb coded syntax elements se(v)	156143
Table 9-4 – codeNum and codeword with vlcNum equal to 15	158145
Table 9-5 – Specification of initial values of lastPosTable[tableNum][codeNum]	159146
Table 9-6 – Specification of intraModeTable[k][codeNum]	160146
Table 9-7 – Specification of initial values of cbpSplitTransTable[flagPattern-8][n][codeNum]	160147
Table 9-8 – Specification of lastPosVlcNumTable[blockType][vlcNumIdx]	162149
Table 9-9 – Derivation of vlcNum from tableIdx and maxRunIdx	164150
Table 9-10 – Derivation of largeOnePos from tableIdx and maxRunIdx when N is equal to 4	164151
Table 9-11 – Derivation of largeOnePos from tableIdx and maxRunIdx when N is greater than 4	164151
Table 9-12 – Derivation of runOfZeros from maxRun and codeNum.....	165151
Table 9-13 – Derivation of levelThreshold from vlcIdx.....	166153
Table 9-14 – Specification of cbpVlcNumTable[cbpVlcNumIdx].....	168155
Table 9-15 – Derivation of cMax from flagPattern and n.....	168155
Table 9-16 – Specification of cbpSplitTransTable and counterNum associated	168155
Table 9-17 – Association of ctxIdx and syntax elements for each slice type in the initialisation process.....	170157
Table 9-18 – Values of variables m and n for alf_cu_flag ctxIdx	172157
Table 9-19 – Values of variables m and n for split_coding_unit_flag ctxIdx.....	172158
Table 9-20 – Values of variables m and n for skip_flag ctxIdx.....	172158
Table 9-21 – Values of variables m and n for cu_qp_delta ctxIdx	172158
Table 9-22 – Values of variables m and n for pred_type.....	173158
Table 9-23 – Values of variable m and n for prev_intra_luma_pred_flag ctxIdx.....	173158
Table 9-24 – Values of variable m and n for rem_intra_luma_pred_mode ctxIdx.....	173158
Table 9-25 – Values of variable m and n for intra_chroma_pred_mode ctxIdx.....	173159
Table 9-26 – Values of variable m and n for merge_flag ctxIdx	173159
Table 9-27 – Values of variable m and n for merge_idx ctxIdx	173159
Table 9-28 – Values of variable m and n for inter_pred_flag ctxIdx.....	174159
Table 9-29 – Values of variable m and n for ref_idx_lc, ref_idx_l0, ref_idx_l1 ctxIdx.....	174159
Table 9-30 – Values of variable m and n for mvd_lc, mvd_l0, mvd_l1 ctxIdx	174159
Table 9-31 – Values of variable m and n for mvp_idx_lc, mvp_idx_l0, mvp_idx_l1 ctxIdx.....	174160
Table 9-32 – Values of variable m and n for no_residual_data_flag ctxIdx.....	174160
Table 9-33 – Values of variable m and n for split_transform_flag ctxIdx.....	174160

Table 9-34 – Values of variable m and n for cbf_luma ctxIdx	175169
Table 9-35 – Values of variable m and n for cbf_cb ctxIdx	175169
Table 9-36 – Values of variable m and n for cbf_cr ctxIdx	175169
Table 9-37 – Values of variable m and n for last_significant_coefficient_x ctxIdx	176164
Table 9-38 – Values of variable m and n for last_significant_coefficient_y ctxIdx	177162
Table 9-39 – Values of variable m and n for significant_coeff_flag ctxIdx (A)	178163
Table 9-40 – Values of variable m and n for significant_coeff_flag ctxIdx (B)	178163
Table 9-41 – Values of variable m and n for significant_coeff_flag ctxIdx (C)	179164
Table 9-42 – Values of variable m and n for coeff_abs_level_greater1_flag ctxIdx	180165
Table 9-43 – Values of variable m and n for coeff_abs_level_greater2_flag ctxIdx	181166
Table 9-44 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset	183163
Table 9-45 – Bin string of the unary binarization (informative)	187171
Table 9-46 – Binarization for pred_type	190173
Table 9-47 – Binarization for rem_intra_luma_pred_mode	190173
Table 9-48 – Specification of cTRMax depending on cRiceParam	191174
Table 9-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values	193176
Table 9-50 – Specification of ctxIdxInc using left and above syntax elements	198179
Table 9-51 – Specification of lastCtx depending on binIdx	199180
Table 9-52 – Specification of rangeTabLPS depending on pStateIdx and qCodIRangeIdx	204186
Table 9-53 – State transition table	205187
Table A-9-54 – Level limits [Ed. (TW) Kept for convenience]	217199

Foreword

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardising telecommunications on a world-wide basis. The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups that, in turn, produce Recommendations on these topics. The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1. In some areas of information technology that fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialised system for world-wide standardisation. National Bodies that are members of ISO and IEC participate in the development of International Standards through technical committees established by the respective organisation to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organisations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

This Recommendation | International Standard was prepared jointly by ITU-T SG 16 Q.6, also known as VCEG (Video Coding Experts Group), and by ISO/IEC JTC 1/SC 29/WG 11, also known as MPEG (Moving Picture Experts Group). VCEG was formed in 1997 to maintain prior ITU-T video coding standards and develop new video coding standard(s) appropriate for a wide range of conversational and non-conversational services. MPEG was formed in 1988 to establish standards for coding of moving pictures and associated audio for various applications such as digital storage media, distribution, and communication.

In this Recommendation | International Standard Annexes A through E contain normative requirements and are an integral part of this Recommendation | International Standard.

High-Efficiency Video Coding

0 Introduction

This clause does not form an integral part of this Recommendation | International Standard.

0.1 Prologue

This subclause does not form an integral part of this Recommendation | International Standard.

As the costs for both processing power and memory have reduced, network support for coded video data has diversified, and advances in video coding technology have progressed, the need has arisen for an industry standard for compressed video representation with substantially increased coding efficiency and enhanced robustness to network environments. Toward these ends the ITU-T Video Coding Experts Group (VCEG) and the ISO/IEC Moving Picture Experts Group (MPEG) formed a Joint Collaborative Team on Video Coding (JCT-VC) in 2010 for development of a new Recommendation | International Standard.

0.2 Purpose

This subclause does not form an integral part of this Recommendation | International Standard.

[Ed. TW: revise the following] This Recommendation | International Standard was developed in response to the growing need for higher compression of moving pictures for various applications such as videoconferencing, digital storage media, television broadcasting, internet streaming, and communication. It is also designed to enable the use of the coded video representation in a flexible manner for a wide variety of network environments. The use of this Recommendation | International Standard allows motion video to be manipulated as a form of computer data and to be stored on various storage media, transmitted and received over existing and future networks and distributed on existing and future broadcasting channels.

0.3 Applications

This subclause does not form an integral part of this Recommendation | International Standard.

[Ed. TW: revise the following] This Recommendation | International Standard is designed to cover a broad range of applications for video content including but not limited to the following:

CATV	Cable TV on optical networks, copper, etc.
DBS	Direct broadcast satellite video services
DSL	Digital subscriber line video services
DTTB	Digital terrestrial television broadcasting
ISM	Interactive storage media (optical disks, etc.)
MMM	Multimedia mailing
MSPN	Multimedia services over packet networks
RTC	Real-time conversational services (videoconferencing, videophone, etc.)
RVS	Remote video surveillance
SSM	Serial storage media (digital VTR, etc.)

0.4 Publication and versions of this Specification

This subclause does not form an integral part of this Recommendation | International Standard.

This Specification has been jointly developed by ITU-T Video Coding Experts Group (VCEG) and the ISO/IEC Moving Picture Experts Group. It is published as technically-aligned twin text in both organizations ITU-T and ISO/IEC.

0.5 Profiles and levels

This subclause does not form an integral part of this Recommendation | International Standard.

This Recommendation | International Standard is designed to be generic in the sense that it serves a wide range of applications, bit rates, resolutions, qualities, and services. Applications should cover, among other things, digital storage media, television broadcasting and real-time communications. In the course of creating this Specification, various requirements from typical applications have been considered, necessary algorithmic elements have been developed, and these have been integrated into a single syntax. Hence, this Specification will facilitate video data interchange among different applications.

Considering the practicality of implementing the full syntax of this Specification, however, a limited number of subsets of the syntax are also stipulated by means of "profiles" and "levels". These and other related terms are formally defined in clause 3.

A "profile" is a subset of the entire bitstream syntax that is specified by this Recommendation | International Standard. Within the bounds imposed by the syntax of a given profile it is still possible to require a very large variation in the performance of encoders and decoders depending upon the values taken by syntax elements in the bitstream such as the specified size of the decoded pictures. In many applications, it is currently neither practical nor economic to implement a decoder capable of dealing with all hypothetical uses of the syntax within a particular profile.

In order to deal with this problem, "levels" are specified within each profile. A level is a specified set of constraints imposed on values of the syntax elements in the bitstream. These constraints may be simple limits on values. Alternatively they may take the form of constraints on arithmetic combinations of values (e.g., picture width multiplied by picture height multiplied by number of pictures decoded per second).

Coded video content conforming to this Recommendation | International Standard uses a common syntax. In order to achieve a subset of the complete syntax, flags, parameters, and other syntax elements are included in the bitstream that signal the presence or absence of syntactic elements that occur later in the bitstream.

0.6 Overview of the design characteristics

This subclause does not form an integral part of this Recommendation | International Standard.

[Ed. TW: revise the following] The coded representation specified in the syntax is designed to enable a high compression capability for a desired image or video quality. The algorithm is typically not lossless, as the exact source sample values are typically not preserved through the encoding and decoding processes. A number of techniques may be used to achieve highly efficient compression. Encoding algorithms (not specified in this Recommendation | International Standard) may select between inter and intra coding for block-shaped regions of each picture. Inter coding uses motion vectors for block-based inter prediction to exploit temporal statistical dependencies between different pictures. Intra coding uses various spatial prediction modes to exploit spatial statistical dependencies in the source signal for a single picture. Motion vectors and intra prediction modes may be specified for a variety of block sizes in the picture. The prediction residual is then further compressed using a transform to remove spatial correlation inside the transform block before it is quantised, producing an irreversible process that typically discards less important visual information while forming a close approximation to the source samples. Finally, the motion vectors or intra prediction modes are combined with the quantised transform coefficient information and encoded using either variable length coding or arithmetic coding.

0.7 How to read this Specification

This subclause does not form an integral part of this Recommendation | International Standard.

0.8 It is suggested that the reader starts with clause 1 (Scope) and moves on to clause 3 (Definitions). Clause 6 should be read for the geometrical relationship of the source, input, and output of the decoder. Clause 6.67 (Scanning order array initialisation process

Input to this process is a block size blkSize.

Output of this process is the array ScanOrder[scanIdx][pos][comp]. The array index scanIdx equal to 0 specifies a zig-zag scan as specified in subclause Error! Reference source not found., scanIdx equal to 1 specifies a horizontal scan and scanIdx equal to 2 specifies a vertical scan. The array index pos specifies the scan position ranging from 0 to (blkSize * blkSize) - 1. The array index comp equal to 0 specifies the horizontal component and the array index comp equal to 1 specifies the vertical component. The array ScanOrder is derived as follows.

HEVC

```
ScanOrder[0] = ZigZag
```

```
i = 0
y = 0
while( y < blkSize ) {
    x = 0
    while( x < blkSize ) {
        ScanOrder[ 1 ][ i ][ 0 ] = x
        ScanOrder[ 1 ][ i ][ 1 ] = y
        x++
        i++
    }
    y++
}

i = 0
x = 0
while( x < blkSize ) {
    y = 0
    while( y < blkSize ) {
        ScanOrder[ 2 ][ i ][ 0 ] = x
        ScanOrder[ 2 ][ i ][ 1 ] = y
        y++
        i++
    }
    x++
}
```

~~Syntax and semantics~~~~Syntax and semantics~~) specifies the order to parse syntax elements from the bitstream. See subclauses 7.1-7.3 for syntactical order and see subclause [7.3.107-4](#) for semantics; i.e., the scope, restrictions, and conditions that are imposed on the syntax elements. The actual parsing for most syntax elements is specified in clause 9 (Parsing process). Finally, clause [7.4.108](#) specifies how the syntax elements are mapped into decoded samples. Throughout reading this Specification, the reader should refer to clauses 2 (Normative references), 4 (Abbreviations), and 5 (Conventions) as needed. Annexes A through E also form an integral part of this Recommendation | International Standard.

Annex A specifies profiles each being tailored to certain application domains, and defines the so-called levels of the profiles. Annex B specifies syntax and semantics of a byte stream format for delivery of coded video as an ordered stream of bytes. Annex C specifies the hypothetical reference decoder and its use to check bitstream and decoder conformance. Annex D specifies syntax and semantics for supplemental enhancement information message payloads. Annex E specifies syntax and semantics of the video usability information parameters of the sequence parameter set.

Throughout this Specification, statements appearing with the preamble "NOTE -" are informative and are not an integral part of this Recommendation | International Standard.

1 Scope

This document specifies High-Efficiency Video Coding.

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations. [Ed. TW: revise the following]

- ITU-T Recommendation T.35 (2000), *Procedure for the allocation of ITU-T defined codes for non-standard facilities*.
- ISO/IEC 11578:1996, Annex A, *Universal Unique Identifier*.
- ISO/CIE 10527:2007, *Colorimetric Observers*.

HEVC

3 Definitions

[Ed. (TW) adapted definitions so far. Needs more work including turning them into 1 sentence each.]

For the purposes of this Recommendation | International Standard, the following definitions apply:

- 3.1 access unit:** A set of *NAL units* that are consecutive in *decoding order* and contain exactly one *primary coded picture*. In addition to the *primary coded picture* one *auxiliary coded picture*, or other *NAL units* not containing *slices* of a *primary coded picture*. The decoding of an access unit always results in a *decoded picture*.
- 3.2 AC transform coefficient:** Any *transform coefficient* for which the *frequency index* in one or both dimensions is non-zero.
- 3.3 adaptive binary arithmetic decoding process:** An entropy *decoding process* that derives the values of *bins* from a *bitstream* produced by an *adaptive binary arithmetic encoding process*.
- 3.4 adaptive binary arithmetic encoding process:** An entropy *encoding process*, not normatively specified in this Recommendation | International Standard, that codes a sequence of *bins* and produces a *bitstream* that can be decoded using the *adaptive binary arithmetic decoding process*.
- 3.5 B slice:** A *slice* that may be decoded using *intra prediction* or *inter prediction* using at most two *motion vectors* and *reference indices* to *predict* the sample values of each *block*.
- 3.6 bin:** One bit of a *bin string*.
- 3.7 binarization:** A set of *bin strings* for all possible values of a *syntax element*.
- 3.8 binarization process:** A unique mapping process of all possible values of a *syntax element* onto a set of *bin strings*.
- 3.9 bin string:** A string of *bins*. A bin string is an intermediate binary representation of values of *syntax elements* from the *binarization* of the *syntax element*.
- 3.10 bi-predictive slice:** See *B slice*.
- 3.11 bitstream:** A sequence of bits that forms the representation of *coded pictures* and associated data forming one or more *coded video sequences*. Bitstream is a collective term used to refer either to a *NAL unit stream* or a *byte stream*.
- 3.12 block:** An MxN (M-column by N-row) array of samples, or an MxN array of *transform coefficients*.
- 3.13 broken link:** A location in a *bitstream* at which it is indicated that some subsequent *pictures* in *decoding order* may contain serious visual artefacts due to unspecified operations performed in the generation of the *bitstream*.
- 3.14 byte:** A sequence of 8 bits, written and read with the most significant bit on the left and the least significant bit on the right. When represented in a sequence of data bits, the most significant bit of a byte is first.
- 3.15 byte-aligned:** A position in a *bitstream* is byte-aligned when the position is an integer multiple of 8 bits from the position of the first bit in the *bitstream*. A bit or *byte* or *syntax element* is said to be byte-aligned when the position at which it appears in a *bitstream* is byte-aligned.
- 3.16 byte stream:** An encapsulation of a *NAL unit stream* containing *start code prefixes* and *NAL units* as specified in Annex B.
- 3.17 can:** A term used to refer to behaviour that is allowed, but not necessarily required.
- 3.18 chroma:** An adjective specifying that a sample array or single sample is representing one of the two colour difference signals related to the primary colours. The symbols used for a chroma array or sample are Cb and Cr.
NOTE – The term chroma is used rather than the term chrominance in order to avoid the implication of the use of linear light transfer characteristics that is often associated with the term chrominance.
- 3.19 clean decoding refresh (CDR) access unit:** An *access unit* in which the *primary coded picture* is a *CDR picture*.
- 3.20 clean decoding refresh (CDR) picture:** A *coded picture* containing only *slices* with *I slice types* that causes the *decoding process* to mark all *reference pictures* except the current CDR picture as "unused for reference" immediately before the decoding of the first picture following the current CDR with an *output order* greater than the current CDR picture. All *coded pictures* that follow a CDR picture in *output order* can be decoded without *inter prediction* from any *picture* that precedes the CDR picture in *output order*. All *coded pictures* with *output order* smaller than the current CDR are not affected by the deferred marking process.

HEVC

- 3.21 **coded picture**: A *coded representation* of a *picture*.
- 3.22 **coded picture buffer (CPB)**: A first-in first-out buffer containing *access units* in *decoding order* specified in the *hypothetical reference decoder* in Annex 0.
- 3.23 **coded representation**: A data element as represented in its coded form.
- 3.24 **coded slice NAL unit**: A *NAL unit* containing a *slice*.
- 3.25 **coded video sequence**: A sequence of *access units* that consists, in decoding order, of an *IDR access unit* followed by zero or more non-IDR *access units* including all subsequent *access units* up to but not including any subsequent *IDR access unit*.
- 3.26 **component**: An array or single sample from one of the three arrays (*luma* and two *chroma*) that make up a *picture* in 4:2:0, 4:2:2, or 4:4:4 colour format or the array or a single sample of the array that make up a *picture* in monochrome format.
- 3.27 **context variable**: A variable specified for the *adaptive binary arithmetic decoding process* of a *bin* by an equation containing recently decoded *bins*.
- 3.28 **DC transform coefficient**: A *transform coefficient* for which the *frequency index* is zero in all dimensions.
- 3.29 **decoded picture**: A *decoded picture* is derived by decoding a *coded picture*.
- 3.30 **decoded picture buffer (DPB)**: A buffer holding *decoded pictures* for reference, output reordering, or output delay specified for the *hypothetical reference decoder* in Annex 0.
- 3.31 **decoder**: An embodiment of a *decoding process*.
- 3.32 **decoder under test (DUT)**: A *decoder* that is tested for conformance to this Recommendation | International Standard by operating the *hypothetical stream scheduler* to deliver a conforming *bitstream* to the *decoder* and to the *hypothetical reference decoder* and comparing the values and timing of the output of the two *decoders*.
- 3.33 **decoding order**: The order in which *syntax elements* are processed by the *decoding process*.
- 3.34 **decoding process**: The process specified in this Recommendation | International Standard that reads a *bitstream* and derives *decoded pictures* from it.
- 3.35 **display process**: A process not specified in this Recommendation | International Standard having, as its input, the cropped *decoded pictures* that are the output of the *decoding process*.
- 3.36 **emulation prevention byte**: A *byte* equal to 0x03 that may be present within a *NAL unit*. The presence of emulation prevention bytes ensures that no sequence of consecutive *byte-aligned bytes* in the *NAL unit* contains a *start code prefix*.
- 3.37 **encoder**: An embodiment of an *encoding process*.
- 3.38 **encoding process**: A process, not specified in this Recommendation | International Standard, that produces a *bitstream* conforming to this Recommendation | International Standard.
- 3.39 **flag**: A variable that can take one of the two possible values 0 and 1.
- 3.40 **frequency index**: A one-dimensional or two-dimensional index associated with a *transform coefficient* prior to an *inverse transform* part of the *decoding process*.
- 3.41 **hypothetical reference decoder (HRD)**: A hypothetical *decoder* model that specifies constraints on the variability of conforming *NAL unit streams* or conforming *byte streams* that an encoding process may produce.
- 3.42 **hypothetical stream scheduler (HSS)**: A hypothetical delivery mechanism for the timing and data flow of the input of a *bitstream* into the *hypothetical reference decoder*. The HSS is used for checking the conformance of a *bitstream* or a *decoder*.
- 3.43 **I slice**: A *slice* that is decoded using *intra prediction* only.
- 3.44 **informative**: A term used to refer to content provided in this Recommendation | International Standard that is not an integral part of this Recommendation | International Standard. Informative content does not establish any mandatory requirements for conformance to this Recommendation | International Standard.
- 3.45 **instantaneous decoding refresh (IDR) access unit**: An *access unit* in which the *primary coded picture* is an *IDR picture*.
- 3.46 **instantaneous decoding refresh (IDR) picture**: A *coded picture* for which the variable *IdrPicFlag* is equal to 1. An IDR picture causes the *decoding process* to mark all *reference pictures* as "unused for reference"

HEVC

immediately after the decoding of the IDR picture. All *coded pictures* that follow an IDR picture in *decoding order* can be decoded without *inter prediction* from any *picture* that precedes the IDR picture in *decoding order*. The first *picture* of each *coded video sequence* in *decoding order* is an IDR picture.

- 3.47 **inter coding:** Coding of a *block*, *macroblock*, *slice*, or *picture* that uses *inter prediction*.
- 3.48 **inter prediction:** A *prediction* derived from decoded samples of *reference pictures* other than the current decoded *picture*.
- 3.49 **intra coding:** Coding of a *block*, *macroblock*, *slice*, or *picture* that uses *intra prediction*.
- 3.50 **intra prediction:** A *prediction* derived from the decoded samples of the same decoded *slice*.
- 3.51 **intra slice:** See *I slice*.
- 3.52 **inverse transform:** A part of the *decoding process* by which a set of *transform coefficients* are converted into spatial-domain values, or by which a set of *transform coefficients* are converted into *DC transform coefficients*.
- 3.53 **layer:** One of a set of syntactical structures in a non-branching hierarchical relationship. Higher layers contain lower layers. The coding layers are the *coded video sequence*, *picture*, *slice*, and *treeblock* layers.
- 3.54 **leaf:** A terminating node of a tree that is a root node of a tree of depth 0.
- 3.55 **level:** A defined set of constraints on the values that may be taken by the *syntax elements* and variables of this Recommendation | International Standard. The same set of levels is defined for all *profiles*, with most aspects of the definition of each level being in common across different *profiles*. Individual implementations may, within specified constraints, support a different level for each supported *profile*. In a different context, level is the value of a *transform coefficient* prior to *scaling*.
- 3.56 **list 0 (list 1) motion vector:** A *motion vector* associated with a *reference index* pointing into *reference picture list 0 (list 1)*.
- 3.57 **list 0 (list 1, list combination) prediction:** *Inter prediction* of the content of a *slice* using a *reference index* pointing into *reference picture list 0 (list 1, combination)*.
- 3.58 **luma:** An adjective specifying that a sample array or single sample is representing the monochrome signal related to the primary colours. The symbol or subscript used for luma is Y or L.
NOTE – The term luma is used rather than the term luminance in order to avoid the implication of the use of linear light transfer characteristics that is often associated with the term luminance. The symbol L is sometimes used instead of the symbol Y to avoid confusion with the symbol y as used for vertical location.
- 3.59 **may:** A term used to refer to behaviour that is allowed, but not necessarily required. In some places where the optional nature of the described behaviour is intended to be emphasized, the phrase "may or may not" is used to provide emphasis.
- 3.60 **memory management control operation:** Seven operations that control *reference picture marking*.
- 3.61 **motion vector:** A two-dimensional vector used for *inter prediction* that provides an offset from the coordinates in the *decoded picture* to the coordinates in a *reference picture*.
- 3.62 **must:** A term used in expressing an observation about a requirement or an implication of a requirement that is specified elsewhere in this Recommendation | International Standard. This term is used exclusively in an *informative* context.
- 3.63 **NAL unit:** A *syntax structure* containing an indication of the type of data to follow and *bytes* containing that data in the form of an *Rbsp* interspersed as necessary with *emulation prevention bytes*.
- 3.64 **NAL unit stream:** A sequence of *NAL units*.
- 3.65 **non-reference picture:** A *picture* coded with *nal_ref_idc* equal to 0. A *non-reference picture* is not used for *inter prediction* of any other *pictures*.
- 3.66 **note:** A term used to prefix *informative* remarks. This term is used exclusively in an *informative* context.
- 3.67 **output order:** The order in which the *decoded pictures* are output from the *decoded picture buffer*.
- 3.68 **P slice:** A *slice* that may be decoded using *intra prediction* or *inter prediction* using at most one *motion vector* and *reference index* to *predict* the sample values of each *block*.
- 3.69 **parameter:** A *syntax element* of a *sequence parameter set* or a *picture parameter set*. Parameter is also used as part of the defined term *quantisation parameter*.

HEVC

- 3.70 partitioning:** The division of a set into subsets such that each element of the set is in exactly one of the subsets.
- 3.71 picture:** [Ed. (TW) define]
- 3.72 picture parameter set:** A *syntax structure* containing *syntax elements* that apply to zero or more entire *coded pictures* as determined by the *pic_parameter_set_id syntax element* found in each *slice header*.
- 3.73 picture order count:** [Ed. (TW) re-check] A variable that is associated with each *coded picture* and has a value that is non-decreasing with increasing *picture* position in *output order* relative to the first output *picture* of the previous *IDR picture* in *decoding order* or relative to the first output *picture* of the previous *picture*, in *decoding order*, that contains a *memory management control operation* that marks all *reference pictures* as "unused for reference".
- 3.74 prediction:** An embodiment of the *prediction process*.
- 3.75 prediction process:** The use of a *predictor* to provide an estimate of the sample value or data element currently being decoded.
- 3.76 predictive slice:** See *P slice*.
- 3.77 predictor:** A combination of specified values or previously decoded sample values or data elements used in the *decoding process* of subsequent sample values or data elements.
- 3.78 primary coded picture:** The coded representation of a *picture* to be used by the *decoding process* for a bitstream conforming to this Recommendation | International Standard. The primary coded picture contains all *treeblocks* of the *picture*. The only *pictures* that have a normative effect on the *decoding process* are primary coded pictures.
- 3.79 profile:** A specified subset of the syntax of this Recommendation | International Standard.
- 3.80 quadtree:** A *tree* in which a parent node can be split into four child nodes. A child node may become parent node for another split into four child nodes.
- 3.81 quantisation parameter:** A variable used by the *decoding process* for *scaling* of *transform coefficient levels*.
- 3.82 random access:** The act of starting the decoding process for a *bitstream* at a point other than the beginning of the stream.
- 3.83 raster scan:** A mapping of a rectangular two-dimensional pattern to a one-dimensional pattern such that the first entries in the one-dimensional pattern are from the first top row of the two-dimensional pattern scanned from left to right, followed similarly by the second, third, etc., rows of the pattern (going down) each scanned from left to right.
- 3.84 raw byte sequence payload (RBSP):** A *syntax structure* containing an integer number of bytes that is encapsulated in a *NAL unit*. An RBSP is either empty or has the form of a *string of data bits* containing *syntax elements* followed by an *RBSP stop bit* and followed by zero or more subsequent bits equal to 0.
- 3.85 raw byte sequence payload (RBSP) stop bit:** A bit equal to 1 present within a *raw byte sequence payload (RBSP)* after a *string of data bits*. The location of the end of the *string of data bits* within an RBSP can be identified by searching from the end of the RBSP for the *RBSP stop bit*, which is the last non-zero bit in the RBSP.
- 3.86 recovery point:** A point in the *bitstream* at which the recovery of an exact or an approximate representation of the *decoded pictures* represented by the *bitstream* is achieved after a *random access* or *broken link*.
- 3.87 reference index:** An index into a *reference picture list*.
- 3.88 reference picture:** A *picture* with *nal_ref_idc* not equal to 0. A *reference picture* contains samples that may be used for *inter prediction* in the *decoding process* of subsequent *pictures* in *decoding order*.
- 3.89 reference picture list:** A list of *reference pictures* that is used for *uni-prediction* of a *P* or *B slice*. For the *decoding process* of a *P slice*, there is one reference picture list. For the *decoding process* of a *B slice*, there are two reference picture lists (list 0 and list 1) and a reference picture lists combination. [Ed. (TW) the latter may not be true anymore]
- 3.90 reference picture list 0:** A *reference picture list* used for *inter prediction* of a *P* or *B slice*. All *inter prediction* used for *P slices* uses reference picture list 0. Reference picture list 0 is one of two *reference picture lists* used for *bi-prediction* for a *B slice*, with the other being *reference picture list*. [Ed. (TW) the latter may not be true anymore]

HEVC

- 3.91 reference picture list 1:** A *reference picture list* used for *bi-prediction* of a *B slice*. Reference picture list 1 is one of two *reference picture lists* used for *bi-prediction* for a *B slice*, with the other being *reference picture list 0*.
- 3.92 reference picture lists combination:** A reference picture list used for uni-prediction of a *B slice*. Reference picture lists combination is derived from the entries of the reference picture lists 0 and reference picture list 1.
- 3.93 reference picture marking:** Specifies, in the bitstream, how the *decoded pictures* are marked for *inter prediction*.
- 3.94 reserved:** The term reserved, when used in the clauses specifying some values of a particular *syntax element*, are for future use by ITU-T | ISO/IEC. These values shall not be used in *bitstreams* conforming to this Recommendation | International Standard, but may be used in future extensions of this Recommendation | International Standard by ITU-T | ISO/IEC.
- 3.95 residual:** The decoded difference between a *prediction* of a sample or data element and its decoded value.
- 3.96 sample aspect ratio:** Specifies, for assisting the *display process*, which is not specified in this Recommendation | International Standard, the ratio between the intended horizontal distance between the columns and the intended vertical distance between the rows of the *luma* sample array in a *picture*. Sample aspect ratio is expressed as *h:v*, where *h* is horizontal width and *v* is vertical height (in arbitrary units of spatial distance).
- 3.97 scaling:** The process of multiplying *transform coefficient levels* by a factor, resulting in *transform coefficients*.
- 3.98 sequence parameter set:** A *syntax structure* containing *syntax elements* that apply to zero or more entire *coded video sequences* as determined by the content of a *seq_parameter_set_id syntax element* found in the *picture parameter set* referred to by the *pic_parameter_set_id syntax element* found in each *slice header*.
- 3.99 shall:** A term used to express mandatory requirements for conformance to this Recommendation | International Standard. When used to express a mandatory constraint on the values of *syntax elements* or on the results obtained by operation of the specified *decoding process*, it is the responsibility of the *encoder* to ensure that the constraint is fulfilled. When used in reference to operations performed by the *decoding process*, any *decoding process* that produces identical results to the *decoding process* described herein conforms to the *decoding process* requirements of this Recommendation | International Standard.
- 3.100 should:** A term used to refer to behaviour of an implementation that is encouraged to be followed under anticipated ordinary circumstances, but is not a mandatory requirement for conformance to this Recommendation | International Standard.
- 3.101 slice:** An integer number of *treeblocks* ordered consecutively in the *raster scan*. For the *primary coded picture*, the division of each *picture* into slices is a *partitioning*. The *treeblock addresses* are derived from the first *treeblock address* in a slice (as represented in the *slice header*).
- 3.102 slice header:** A part of a coded *slice* containing the data elements pertaining to the first or all *macroblocks* represented in the *slice*.
- 3.103 source:** Term used to describe the video material or some of its attributes before encoding.
- 3.104 start code prefix:** A unique sequence of three *bytes* equal to 0x000001 embedded in the *byte stream* as a prefix to each *NAL unit*. The location of a start code prefix can be used by a *decoder* to identify the beginning of a new *NAL unit* and the end of a previous *NAL unit*. Emulation of start code prefixes is prevented within *NAL units* by the inclusion of *emulation prevention bytes*.
- 3.105 string of data bits (SODB):** A sequence of some number of bits representing *syntax elements* present within a *raw byte sequence payload* prior to the *raw byte sequence payload stop bit*. Within an SODB, the left-most bit is considered to be the first and most significant bit, and the right-most bit is considered to be the last and least significant bit.
- 3.106 syntax element:** An element of data represented in the *bitstream*.
- 3.107 syntax structure:** Zero or more *syntax elements* present together in the *bitstream* in a specified order.
- 3.108 transform coefficient:** A scalar quantity, considered to be in a frequency domain, that is associated with a particular one-dimensional or two-dimensional *frequency index* in an *inverse transform* part of the *decoding process*.
- 3.109 transform coefficient level:** An integer quantity representing the value associated with a particular two-dimensional frequency index in the *decoding process* prior to *scaling* for computation of a *transform coefficient* value.

HEVC

- 3.110 tree:** A tree is a finite set of nodes with a unique root node. A terminating node is called a *leaf*.
- 3.111 treeblock:** A $N \times N$ block of *luma* samples and two corresponding blocks of *chroma* samples of a *picture* that has three sample arrays, or a $N \times N$ block of samples of a monochrome *picture* or a *picture* that is coded using three separate colour planes. The division of a *slice* into treeblocks is a *partitioning*.
- 3.112 treeblock address:** A treeblock address is the index of a *treeblock* in a *treeblock raster scan* of the *picture* starting with zero for the top-left *treeblock* in a *picture*.
- 3.113 treeblock location:** The two-dimensional coordinates of a *treeblock* in a *picture* denoted by (x, y) . For the top left *treeblock* of the *picture* (x, y) is equal to $(0, 0)$. x is incremented by 1 for each *treeblock* column from left to right. The value of y is incremented by 1 for each *treeblock* row from top to bottom.
- 3.114 treeblock partition:** A block of *luma* samples and two corresponding blocks of *chroma* samples resulting from a *partitioning* of a *treeblock* for *inter prediction* for a *picture* that has three sample arrays or a block of *luma* samples resulting from a *partitioning* of a *treeblock* for *inter prediction* for a monochrome *picture* or a *picture* that is coded using three separate colour planes.
- 3.115 universal unique identifier (UUID):** An identifier that is unique with respect to the space of all universal unique identifiers.
- 3.116 unspecified:** The term unspecified, when used in the clauses specifying some values of a particular *syntax element*, indicates that the values have no specified meaning in this Recommendation | International Standard and will not have a specified meaning in the future as an integral part of this Recommendation | International Standard.
- 3.117 variable length coding (VLC):** A reversible procedure for entropy coding that assigns shorter bit strings to *symbols* expected to be more frequent and longer bit strings to *symbols* expected to be less frequent.
- 3.118 VCL NAL unit:** A collective term for *coded slice NAL units*.
- 3.119 zig-zag scan:** A specific sequential ordering of *transform coefficient levels* from (approximately) the lowest spatial frequency to the highest.

4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

CABAC	Context-based Adaptive Binary Arithmetic Coding
CAVLC	Context-based Adaptive Variable Length Coding
CBR	Constant Bit Rate
CDR	Clean Decoding Refresh
CPB	Coded Picture Buffer
DPB	Decoded Picture Buffer
DUT	Decoder under test
FIFO	First-In, First-Out
HRD	Hypothetical Reference Decoder
HSS	Hypothetical Stream Scheduler
IDR	Instantaneous Decoding Refresh
LSB	Least Significant Bit
MSB	Most Significant Bit
NAL	Network Abstraction Layer
RBSP	Raw Byte Sequence Payload
SEI	Supplemental Enhancement Information
SODB	String Of Data Bits
TB	Treeblock

HEVC

UUID	Universal Unique Identifier
VBR	Variable Bit Rate
VCL	Video Coding Layer
VLC	Variable Length Coding
VUI	Video Usability Information

5 Conventions

NOTE – The mathematical operators used in this Specification are similar to those used in the C programming language. However, integer division and arithmetic shift operations are specifically defined. Numbering and counting conventions generally begin from 0.

5.1 Arithmetic operators

The following arithmetic operators are defined as follows:

+	Addition
–	Subtraction (as a two-argument operator) or negation (as a unary prefix operator)
*	Multiplication, including matrix multiplication
x^y	Exponentiation. Specifies x to the power of y. In other contexts, such notation is used for superscripting not intended for interpretation as exponentiation.
/	Integer division with truncation of the result toward zero. For example, $7/4$ and $-7/-4$ are truncated to 1 and $-7/4$ and $7/-4$ are truncated to –1.
÷	Used to denote division in mathematical equations where no truncation or rounding is intended.
$\frac{x}{y}$	Used to denote division in mathematical equations where no truncation or rounding is intended.
$\sum_{i=x}^y f(i)$	The summation of $f(i)$ with i taking all integer values from x up to and including y.
$x \% y$	Modulus. Remainder of x divided by y, defined only for integers x and y with $x \geq 0$ and $y > 0$.

5.2 Logical operators

The following logical operators are defined as follows:

$x \ \&\& \ y$	Boolean logical "and" of x and y.
$x \ \ y$	Boolean logical "or" of x and y.
!	Boolean logical "not".
$x \ ? \ y : z$	If x is TRUE or not equal to 0, evaluates to the value of y; otherwise, evaluates to the value of z.

5.3 Relational operators

The following relational operators are defined as follows:

>	Greater than.
>=	Greater than or equal to.
<	Less than.
<=	Less than or equal to.
=	Equal to.
!=	Not equal to.

When a relational operator is applied to a syntax element or variable that has been assigned the value "na" (not applicable), the value "na" is treated as a distinct value for the syntax element or variable. The value "na" is considered not to be equal to any other value.

HEVC

5.4 Bit-wise operators

The following bit-wise operators are defined as follows:

&	Bit-wise "and". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
	Bit-wise "or". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
^	Bit-wise "exclusive or". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
x >> y	Arithmetic right shift of a two's complement integer representation of x by y binary digits. This function is defined only for positive integer values of y. Bits shifted into the MSBs as a result of the right shift have a value equal to the MSB of x prior to the shift operation.
x << y	Arithmetic left shift of a two's complement integer representation of x by y binary digits. This function is defined only for positive integer values of y. Bits shifted into the LSBs as a result of the left shift have a value equal to 0.

5.5 Assignment operators

The following arithmetic operators are defined as follows:

=	Assignment operator.
++	Increment, i.e., x++ is equivalent to $x = x + 1$; when used in an array index, evaluates to the value of the variable prior to the increment operation.
--	Decrement, i.e., x-- is equivalent to $x = x - 1$; when used in an array index, evaluates to the value of the variable prior to the decrement operation.
+=	Increment by amount specified, i.e., $x += 3$ is equivalent to $x = x + 3$, and $x += (-3)$ is equivalent to $x = x + (-3)$.
-=	Decrement by amount specified, i.e., $x -= 3$ is equivalent to $x = x - 3$, and $x -= (-3)$ is equivalent to $x = x - (-3)$.

5.6 Range notation

The following notation is used to specify a range of values:

$x = y..z$ x takes on integer values starting from y to z, inclusive, with x, y, and z being integer numbers.

5.7 Mathematical functions

The following mathematical functions are defined as follows:

$$\text{Abs}(x) = \begin{cases} x & ; \quad x \geq 0 \\ -x & ; \quad x < 0 \end{cases} \quad (5-1)$$

$$\text{Ceil}(x) \quad \text{the smallest integer greater than or equal to } x. \quad (5-2)$$

$$\text{Clip1}_V(x) = \text{Clip3}(0, (1 \ll \text{BitDepth}_V) - 1, x) \quad (5-3)$$

$$\text{Clip1}_C(x) = \text{Clip3}(0, (1 \ll \text{BitDepth}_C) - 1, x) \quad (5-4)$$

HEVC

$$\text{Clip3}(x, y, z) = \begin{cases} x & ; \quad z < x \\ y & ; \quad z > y \\ z & ; \quad \text{otherwise} \end{cases} \quad (5-5)$$

Floor(x) the greatest integer less than or equal to x. (5-6)

$$\text{InverseRasterScan}(a, b, c, d, e) = \begin{cases} (a \% (d / b)) * b & ; \quad e == 0 \\ (a / (d / b)) * c & ; \quad e == 1 \end{cases} \quad (5-7)$$

Log2(x) returns the base-2 logarithm of x. (5-8)

Log10(x) returns the base-10 logarithm of x. (5-9)

$$\text{Median}(x, y, z) = x + y + z - \text{Min}(x, \text{Min}(y, z)) - \text{Max}(x, \text{Max}(y, z)) \quad (5-10)$$

$$\text{Min}(x, y) = \begin{cases} x & ; \quad x \leq y \\ y & ; \quad x > y \end{cases} \quad (5-11)$$

$$\text{Max}(x, y) = \begin{cases} x & ; \quad x \geq y \\ y & ; \quad x < y \end{cases} \quad (5-12)$$

$$\text{Round}(x) = \text{Sign}(x) * \text{Floor}(\text{Abs}(x) + 0.5) \quad (5-13)$$

$$\text{Sign}(x) = \begin{cases} 1 & ; \quad x \geq 0 \\ -1 & ; \quad x < 0 \end{cases} \quad (5-14)$$

$$\text{Sqrt}(x) = \sqrt{x} \quad (5-15)$$

5.8 Order of operation precedence

When order of precedence in an expression is not indicated explicitly by use of parentheses, the following rules apply:

- operations of a higher precedence are evaluated before any operation of a lower precedence,
- operations of the same precedence are evaluated sequentially from left to right.

Table 5-1 specifies the precedence of operations from highest to lowest; a higher position in the table indicates a higher precedence.

NOTE – For those operators that are also used in the C programming language, the order of precedence used in this Specification is the same as used in the C programming language.

Table 5-15-15-1 – Operation precedence from highest (at top of table) to lowest (at bottom of table)

operations (with operands x, y, and z)
"x++", "x--"
"!x", "-x" (as a unary prefix operator)
x^y
"x * y", "x / y", "x ÷ y", " $\frac{x}{y}$ ", "x % y"
"x + y", "x - y" (as a two-argument operator), " $\sum_{i=x}^y f(i)$ "
"x << y", "x >> y"
"x < y", "x <= y", "x > y", "x >= y"
"x = y", "x != y"
"x & y"
"x y"
"x && y"
"x y"
"x ? y : z"
"x = y", "x += y", "x -= y"

5.9 Variables, syntax elements, and tables

Syntax elements in the bitstream are represented in **bold** type. Each syntax element is described by its name (all lower case letters with underscore characters), its one or two syntax categories, and one or two descriptors for its method of coded representation. The decoding process behaves according to the value of the syntax element and to the values of previously decoded syntax elements. When a value of a syntax element is used in the syntax tables or the text, it appears in regular (i.e., not bold) type.

In some cases the syntax tables may use the values of other variables derived from syntax elements values. Such variables appear in the syntax tables, or text, named by a mixture of lower case and upper case letter and without any underscore characters. Variables starting with an upper case letter are derived for the decoding of the current syntax structure and all depending syntax structures. Variables starting with an upper case letter may be used in the decoding process for later syntax structures without mentioning the originating syntax structure of the variable. Variables starting with a lower case letter are only used within the subclause in which they are derived.

In some cases, "mnemonic" names for syntax element values or variable values are used interchangeably with their numerical values. Sometimes "mnemonic" names are used without any associated numerical values. The association of values and names is specified in the text. The names are constructed from one or more groups of letters separated by an underscore character. Each group starts with an upper case letter and may contain more upper case letters.

NOTE – The syntax is described in a manner that closely follows the C-language syntactic constructs.

Functions that specify properties of the current position in the bitstream are referred to as syntax functions. These functions are specified in subclause 0 and assume the existence of a bitstream pointer with an indication of the position of the next bit to be read by the decoding process from the bitstream. Syntax functions are described by their names, which are constructed as syntax element names and end with left and right round parentheses including zero or more variable names (for definition) or values (for usage), separated by commas (if more than one variable).

Functions that are not syntax functions (including mathematical functions specified in subclause 5.7) are described by their names, which start with an upper case letter, contain a mixture of lower and upper case letters without any underscore character, and end with left and right parentheses including zero or more variable names (for definition) or values (for usage) separated by commas (if more than one variable).

A one-dimensional array is referred to as a list. A two-dimensional array is referred to as a matrix. Arrays can either be syntax elements or variables. Subscripts or square parentheses are used for the indexing of arrays. In reference to a visual depiction of a matrix, the first subscript is used as a row (vertical) index and the second subscript is used as a column

HEVC

(horizontal) index. The indexing order is reversed when using square parentheses rather than subscripts for indexing. Thus, an element of a matrix *s* at horizontal position *x* and vertical position *y* may be denoted either as *s*[*x*, *y*] or as *s*_{*y**x*}.

Binary notation is indicated by enclosing the string of bit values by single quote marks. For example, '01000001' represents an eight-bit string having only its second and its last bits (counted from the most to the least significant bit) equal to 1.

Hexadecimal notation, indicated by prefixing the hexadecimal number by "0x", may be used instead of binary notation when the number of bits is an integer multiple of 4. For example, 0x41 represents an eight-bit string having only its second and its last bits (counted from the most to the least significant bit) equal to 1.

Numerical values not enclosed in single quotes and not prefixed by "0x" are decimal values.

A value equal to 0 represents a FALSE condition in a test statement. The value TRUE is represented by any value different from zero.

5.10 Text description of logical operations

In the text, a statement of logical operations as would be described in pseudo-code as

```
if( condition 0 )
    statement 0
else if ( condition 1 )
    statement 1
...
else /* informative remark on remaining condition */
    statement n
```

may be described in the following manner:

- ... as follows / ... the following applies.
- If condition 0, statement 0
- Otherwise, if condition 1, statement 1
- ...
- Otherwise (informative remark on remaining condition), statement n

Each "If ... Otherwise, if ... Otherwise, ..." statement in the text is introduced with "... as follows" or "... the following applies" immediately followed by "If ... ". The last condition of the "If ... Otherwise, if ... Otherwise, ..." is always an "Otherwise, ...". Interleaved "If ... Otherwise, if ... Otherwise, ..." statements can be identified by matching "... as follows" or "... the following applies" with the ending "Otherwise, ...".

In the text, a statement of logical operations as would be described in pseudo-code as

```
if( condition 0a && condition 0b )
    statement 0
else if ( condition 1a || condition 1b )
    statement 1
...
else
    statement n
```

may be described in the following manner:

- ... as follows / ... the following applies.
- If all of the following conditions are true, statement 0
 - condition 0a
 - condition 0b
- Otherwise, if any of the following conditions are true, statement 1
 - condition 1a
 - condition 1b
- ...
- Otherwise, statement n

HEVC

In the text, a statement of logical operations as would be described in pseudo-code as:

```
if( condition 0 )  
    statement 0  
if ( condition 1 )  
    statement 1
```

may be described in the following manner:

When condition 0, statement 0
When condition 1, statement 1

5.11 Processes

Processes are used to describe the decoding of syntax elements. A process has a separate specification and invoking. All syntax elements and upper case variables that pertain to the current syntax structure and depending syntax structures are available in the process specification and invoking. A process specification may also have a lower case variable explicitly specified as the input. Each process specification has explicitly specified an output. The output is a variable that can either be an upper case variable or a lower case variable.

When invoking a process, the assignment of variables is specified as follows.

- If the variables at the invoking and the process specification do not have the same name, the variables are explicitly assigned to lower case input or output variables of the process specification.
- Otherwise (the variables at the invoking and the process specification have the same name), assignment is implied.

In the specification of a process, a specific macroblock may be referred to by the variable name having a value equal to the address of the specific macroblock.

6 Source, coded, decoded and output data formats, scanning processes, and neighbouring relationships

6.1 Bitstream formats

This subclause specifies the relationship between the NAL unit stream and byte stream, either of which are referred to as the bitstream.

The bitstream can be in one of two formats: the NAL unit stream format or the byte stream format. The NAL unit stream format is conceptually the more "basic" type. It consists of a sequence of syntax structures called NAL units. This sequence is ordered in decoding order. There are constraints imposed on the decoding order (and contents) of the NAL units in the NAL unit stream.

The byte stream format can be constructed from the NAL unit stream format by ordering the NAL units in decoding order and prefixing each NAL unit with a start code prefix and zero or more zero-valued bytes to form a stream of bytes. The NAL unit stream format can be extracted from the byte stream format by searching for the location of the unique start code prefix pattern within this stream of bytes. Methods of framing the NAL units in a manner other than use of the byte stream format are outside the scope of this Recommendation | International Standard. The byte stream format is specified in Annex B.

6.2 Source, decoded, and output picture formats

This subclause specifies the relationship between source and decoded pictures that is given via the bitstream.

The video source that is represented by the bitstream is a sequence of pictures in decoding order.

The source and decoded pictures are each comprised of one or more sample arrays:

- Luma (Y) only (monochrome).
- Luma and two chroma (YCbCr or YCgCo).
- Green, Blue and Red (GBR, also known as RGB).
- Arrays representing other unspecified monochrome or tri-stimulus colour samplings (for example, YZX, also known as XYZ).

HEVC

For convenience of notation and terminology in this Specification, the variables and terms associated with these arrays are referred to as luma (or L or Y) and chroma, where the two chroma arrays are referred to as Cb and Cr; regardless of the actual colour representation method in use. The actual colour representation method in use can be indicated in syntax that is specified in Annex E.

The variables SubWidthC, and SubHeightC are specified in Table 6-1, depending on the chroma format sampling structure, which is specified through chroma_format_idc and separate_colour_plane_flag. An entry marked as "-" in Table 6-1 denotes an undefined value for SubWidthC or SubHeightC. Other values of chroma_format_idc, SubWidthC, and SubHeightC may be specified in the future by ITU-T | ISO/IEC.

Table 6-1 – SubWidthC, and SubHeightC values derived from chroma_format_idc and separate_colour_plane_flag

chroma_format_idc	separate_colour_plane_flag	Chroma Format	SubWidthC	SubHeightC
0	0	monochrome	-	-
1	0	4:2:0	2	2
2	0	4:2:2	2	1
3	0	4:4:4	1	1
3	1	4:4:4	-	-

In monochrome sampling there is only one sample array, which is nominally considered the luma array.

In 4:2:0 sampling, each of the two chroma arrays has half the height and half the width of the luma array.

In 4:2:2 sampling, each of the two chroma arrays has the same height and half the width of the luma array.

In 4:4:4 sampling, depending on the value of separate_colour_plane_flag, the following applies.

- If separate_colour_plane_flag is equal to 0, each of the two chroma arrays has the same height and width as the luma array.
- Otherwise (separate_colour_plane_flag is equal to 1), the three colour planes are separately processed as monochrome sampled pictures.

The number of bits necessary for the representation of each of the samples in the luma and chroma arrays in a video sequence is in the range of 8 to 14, and the number of bits used in the luma array may differ from the number of bits used in the chroma arrays.

When the value of chroma_format_idc is equal to 1, the nominal vertical and horizontal relative locations of luma and chroma samples in pictures are shown in Figure 6-1. Alternative chroma sample relative locations may be indicated in video usability information (see Annex E).

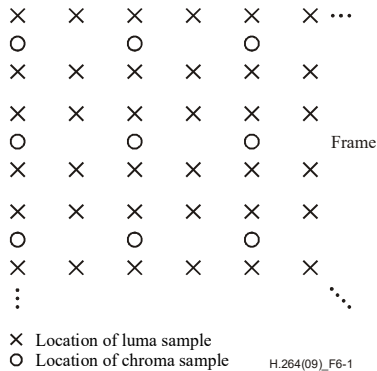


Figure 6-1 – Nominal vertical and horizontal locations of 4:2:0 luma and chroma samples in a picture [Ed. Re-draw figure]

When the value of chroma_format_idc is equal to 2, the chroma samples are co-sited with the corresponding luma samples and the nominal locations in a picture are as shown in Figure 6-2.

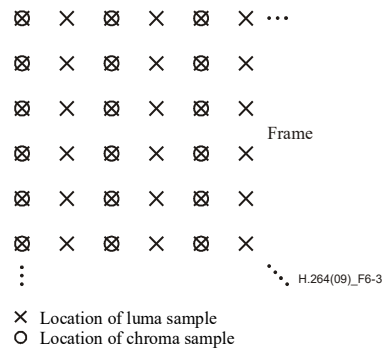


Figure 6-2 – Nominal vertical and horizontal locations of 4:2:2 luma and chroma samples in a picture [Ed. Redraw figure]

When the value of chroma_format_idc is equal to 3, all array samples are co-sited for all cases of pictures and the nominal locations in a picture are as shown in Figure 6-36-3.

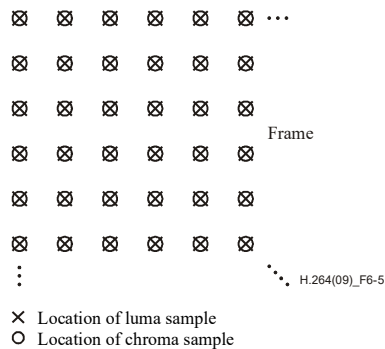


Figure 6-3 – Nominal vertical and horizontal locations of 4:4:4 luma and chroma samples in a picture [Ed. Redraw figure]

The samples are processed in units of treeblocks. The luma array for each treeblock in samples in both width and height is

$$\text{TbSize} = 64 \quad (6-1)$$

$$\text{Log2TbSize} = 6 \quad (6-2)$$

The variables TbWidthC and TbHeightC, which specify the width and height, respectively, of the chroma arrays for each treeblock, are derived as follows.

- If chroma_format_idc is equal to 0 (monochrome) or separate_colour_plane_flag is equal to 1, TbWidthC and TbHeightC are both equal to 0.
- Otherwise, TbWidthC and TbHeightC are derived as

$$\text{TbWidthC} = \text{TbSize} / \text{SubWidthC} \quad (6-3)$$

$$\text{TbHeightC} = \text{TbSize} / \text{SubHeightC} \quad (6-4)$$

6.3 Spatial subdivision of pictures and slices

This subclause specifies how a picture is partitioned into slices and treeblocks. Pictures are divided into slices. A slice is a sequence of treeblocks.

Each treeblock is comprised of one $N_{tb} \times N_{tb}$ luma array and, when the chroma sampling format is not equal to 4:0:0 and `separate_colour_plane_flag` is equal to 0, two corresponding chroma sample arrays. When `separate_colour_plane_flag` is equal to 1, each treeblock is comprised of one $N_{tb} \times N_{tb}$ luma or chroma sample array. For example, a picture may be divided into two slices as shown in [Figure 6-4](#).

When a picture is coded using three separate colour planes (`separate_colour_plane_flag` is equal to 1), a slice contains only treeblocks of one colour component being identified by the corresponding value of `colour_plane_id`, and each colour component array of a picture consists of slices having the same `colour_plane_id` value. Coded slices with different values of `colour_plane_id` within an access unit can be interleaved with each other under the constraint that for each value of `colour_plane_id`, the coded slice NAL units with that value `colour_plane_id` shall be in the order of increasing treeblock address for the first treeblock of each coded slice NAL unit.

NOTE – When `separate_colour_plane_flag` is equal to 0, each treeblock of a picture is contained in exactly one slice. When `separate_colour_plane_flag` is equal to 1, each treeblock of a colour component is contained in exactly one slice (i.e., information for each treeblock of a picture is present in exactly three slices and these three slices have different values of `colour_plane_id`).

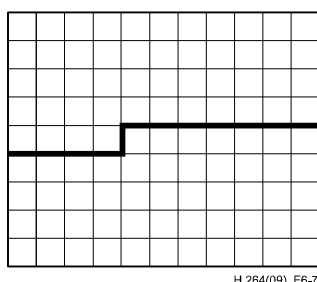


Figure 6-4 – A picture with 11 by 9 treeblocks that is partitioned into two slices

Each treeblock is assigned a partition signalling to identify the block sizes for intra or inter prediction and for transform coding. The partitioning is a recursive quadtree partitioning. The root of the quadtree is associated with the treeblock. The quadtree is split until a leaf is reached, which is referred to as the coding node. The coding node is the root node of two trees, the prediction tree and the transform tree.

[Ed. (TW) What is a "unit"?]

The prediction tree specifies the position and size of prediction blocks. The prediction tree and associated prediction data are referred to as prediction unit.

The transform tree specifies the position and size of transform blocks. The transform tree and associated transform data are referred to as transform unit.

The splitting information for luma and chroma is identical for the prediction tree and may or may not be identical for the transform tree.

The coding node and the associated prediction and transform units form together a coding unit.

[Ed.: (WJ) block = a rectangular 2D array (one component), unit = collective term for specifying information for both luma and chroma. Don't use the term 'unit' by itself – always use the term 'unit' with prefix – coding unit, prediction unit or transform unit.]

6.4 Inverse scanning processes and derivation processes for neighbours

This subclause specifies inverse scanning processes; i.e., the mapping of indices to locations, and derivation processes for neighbours.

6.4.1 Inverse treeblock scanning process

Input to this process is a treeblock address `tbAddr`.

Output of this process is the location (x, y) of the upper-left luma sample for the treeblock with address `tbAddr` relative to the upper-left sample of the picture.

The inverse treeblock scanning process is specified as follows.

HEVC

$x = \text{InverseRasterScan}(tbAddr, 16, 16, \text{PicWidthInSamples}_L, 0)$ (6-5)

$y = \text{InverseRasterScan}(tbAddr, 16, 16, \text{PicWidthInSamples}_L, 1)$ (6-6)

[Ed. (TW): The text found in JCVTV-B205 that relates to the rest of this clause requires substantial editorial and formatting work. It cannot be imported as is.]

6.4.2 Derivation process for the availability of treeblock addresses

Input to this process is a treeblock address $tbAddr$.

Output of this process is the availability of the treeblock $tbAddr$.

NOTE – The meaning of availability is determined when this process is invoked.

The treeblock is marked as available, unless one of the following conditions is true in which case the treeblock shall be marked as not available:

- $tbAddr < 0$
- $tbAddr > \text{CurrTbAddr}$
- the treeblock with address $tbAddr$ belongs to a different slice than the treeblock with address CurrTbAddr and the lightweight_slice_flag of the slice containing the treeblock with address CurrTbAddr is equal to 0.

[Ed. (WJ): do we need to separate the use of slice and lightweight slice? E.g. Is lightweight slice a kind of slice or sub-slice? We may need the concrete definitions]

6.5 Zig-zag scanning array initialisation process

Input to this process is a block size $blkSize$.

Output of this process is the array $\text{ZigZag}[pos][comp]$. The array index pos specify the scan position ranging from 0 to $(blkSize * blkSize) - 1$. The array index $comp$ equal to 0 specifies the horizontal component and the array index $comp$ equal to 1 specifies the vertical component. The array ZigZag is derived as follows.

```

ZigZag[ 0 ][ 0 ] = 0
ZigZag[ 0 ][ 1 ] = 0
i = 1
x = 1
y = 0
stopLoop = ( blkSize == 1 ) ? true : false
while( !stopLoop ) {
    while( x >= 0 ) {
        if( x >= 0 && x < blkSize && y >= 0 && y < blkSize ) {
            ZigZag[ i ][ 0 ] = x
            ZigZag[ i ][ 1 ] = y
            i++
        }
        x--
        y++
    }
    x = 0
    while( y >= 0 ) {
        if( x >= 0 && x < blkSize && y >= 0 && y < blkSize ) {
            ZigZag[ i ][ 0 ] = x
            ZigZag[ i ][ 1 ] = y
            i++
        }
        x++
        y--
    }
    y = 0
    if( i >= blkSize * blkSize )
        stopLoop = true
}

```

HEVC

6.6 Scanning order array initialisation process

Input to this process is a block size blkSize.

Output of this process is the array ScanOrder[scanIdx][pos][comp]. The array index scanIdx equal to 0 specifies a zig-zag scan as specified in subclause [Error! Reference source not found.6-5](#), scanIdx equal to 1 specifies a horizontal scan and scanIdx equal to 2 specifies a vertical scan. The array index pos specifies the scan position ranging from 0 to (blkSize * blkSize) – 1. The array index comp equal to 0 specifies the horizontal component and the array index comp equal to 1 specifies the vertical component. The array ScanOrder is derived as follows.

```
ScanOrder[0] = ZigZag
i = 0
y = 0
while( y < blkSize ) {
    x = 0
    while( x < blkSize ) {
        ScanOrder[ 1 ][ i ][ 0 ] = x
        ScanOrder[ 1 ][ i ][ 1 ] = y
        x++
        i++
    }
    y++
}

i = 0
x = 0
while( x < blkSize ) {
    y = 0
    while( y < blkSize ) {
        ScanOrder[ 2 ][ i ][ 0 ] = x
        ScanOrder[ 2 ][ i ][ 1 ] = y
        y++
        i++
    }
    x++
}
```

7 Syntax and semantics

7.1 Method of specifying syntax in tabular form

The syntax tables specify a superset of the syntax of all allowed bitstreams. Additional constraints on the syntax may be specified, either directly or indirectly, in other clauses.

NOTE – An actual decoder should implement means for identifying entry points into the bitstream and means to identify and handle non-conforming bitstreams. The methods for identifying and handling errors and other such situations are not specified here.

The following table lists examples of pseudo code used to describe the syntax. When **syntax_element** appears, it specifies that a syntax element is parsed from the bitstream and the bitstream pointer is advanced to the next position beyond the syntax element in the bitstream parsing process.

	C	Descriptor
/* A statement can be a syntax element with an associated syntax category and descriptor or can be an expression used to specify conditions for the existence, type, and quantity of syntax elements, as in the following two examples */		
syntax_element	3	ue(v)
conditioning statement		
/* A group of statements enclosed in curly brackets is a compound statement and is treated functionally as a single statement. */		
{		
statement		
statement		

HEVC

...		
}		
/* A "while" structure specifies a test of whether a condition is true, and if true, specifies evaluation of a statement (or compound statement) repeatedly until the condition is no longer true */		
while(condition)		
statement		
/* A "do ... while" structure specifies evaluation of a statement once, followed by a test of whether a condition is true, and if true, specifies repeated evaluation of the statement until the condition is no longer true */		
do		
statement		
while(condition)		
/* An "if ... else" structure specifies a test of whether a condition is true, and if the condition is true, specifies evaluation of a primary statement, otherwise, specifies evaluation of an alternative statement. The "else" part of the structure and the associated alternative statement is omitted if no alternative statement evaluation is needed */		
if(condition)		
primary statement		
else		
alternative statement		
/* A "for" structure specifies evaluation of an initial statement, followed by a test of a condition, and if the condition is true, specifies repeated evaluation of a primary statement followed by a subsequent statement until the condition is no longer true. */		
for(initial statement; condition; subsequent statement)		
primary statement		

7.2 Specification of syntax functions, categories, and descriptors

The functions presented here are used in the syntactical description. These functions assume the existence of a bitstream pointer with an indication of the position of the next bit to be read by the decoding process from the bitstream.

`byte_aligned()` is specified as follows.

- If the current position in the bitstream is on a byte boundary, i.e., the next bit in the bitstream is the first bit in a byte, the return value of `byte_aligned()` is equal to TRUE.
- Otherwise, the return value of `byte_aligned()` is equal to FALSE.

`more_data_in_byte_stream()`, which is used only in the byte stream NAL unit syntax structure specified in Annex B, is specified as follows.

- If more data follow in the byte stream, the return value of `more_data_in_byte_stream()` is equal to TRUE.
- Otherwise, the return value of `more_data_in_byte_stream()` is equal to FALSE.

`more_rbsp_data()` is specified as follows.

- If there is no more data in the RBSP, the return value of `more_rbsp_data()` is equal to FALSE.
- Otherwise, the RBSP data is searched for the last (least significant, right-most) bit equal to 1 that is present in the RBSP. Given the position of this bit, which is the first bit (`rbsp_stop_one_bit`) of the `rbsp_trailing_bits()` syntax structure, the following applies.
 - If there is more data in an RBSP before the `rbsp_trailing_bits()` syntax structure, the return value of `more_rbsp_data()` is equal to TRUE.

HEVC

- Otherwise, the return value of `more_rbsp_data()` is equal to FALSE.

The method for enabling determination of whether there is more data in the RBSP is specified by the application (or in Annex B for applications that use the byte stream format).

`more_rbsp_trailing_data()` is specified as follows.

- If there is more data in an RBSP, the return value of `more_rbsp_trailing_data()` is equal to TRUE.
- Otherwise, the return value of `more_rbsp_trailing_data()` is equal to FALSE.

`next_bits(n)` provides the next n bits in the bitstream for comparison purposes, without advancing the bitstream pointer. Provides a look at the next n bits in the bitstream with n being its argument. When used within the byte stream as specified in Annex B, `next_bits(n)` returns a value of 0 if fewer than n bits remain within the byte stream.

`read_bits(n)` reads the next n bits from the bitstream and advances the bitstream pointer by n bit positions. When n is equal to 0, `read_bits(n)` is specified to return a value equal to 0 and to not advance the bitstream pointer.

The following descriptors specify the parsing process of each syntax element. For some syntax elements, two descriptors, separated by a vertical bar, are used. In these cases, the left descriptors apply when `entropy_coding_mode_flag` is equal to 0 and the right descriptor applies when `entropy_coding_mode_flag` is equal to 1.

- `ae(v)`: context-adaptive arithmetic entropy-coded syntax element. The parsing process for this descriptor is specified in subclause 9.3.
- `b(8)`: byte having any pattern of bit string (8 bits). The parsing process for this descriptor is specified by the return value of the function `read_bits(8)`.
- `ce(v)`: context-adaptive variable-length entropy-coded syntax element with the left bit first. The parsing process for this descriptor is specified in subclause 9.29.2.
- `f(n)`: fixed-pattern bit string using n bits written (from left to right) with the left bit first. The parsing process for this descriptor is specified by the return value of the function `read_bits(n)`.
- `i(n)`: signed integer using n bits. When n is "v" in the syntax table, the number of bits varies in a manner dependent on the value of other syntax elements. The parsing process for this descriptor is specified by the return value of the function `read_bits(n)` interpreted as a two's complement integer representation with most significant bit written first.
- `me(v)`: mapped Exp-Golomb-coded syntax element with the left bit first. The parsing process for this descriptor is specified in subclause 9.19.4.
- `se(v)`: signed integer Exp-Golomb-coded syntax element with the left bit first. The parsing process for this descriptor is specified in subclause 9.19.4.
- `te(v)`: truncated Exp-Golomb-coded syntax element with left bit first. The parsing process for this descriptor is specified in subclause 9.19.4.
- `u(n)`: unsigned integer using n bits. When n is "v" in the syntax table, the number of bits varies in a manner dependent on the value of other syntax elements. The parsing process for this descriptor is specified by the return value of the function `read_bits(n)` interpreted as a binary representation of an unsigned integer with most significant bit written first.
- `ue(v)`: unsigned integer Exp-Golomb-coded syntax element with the left bit first. The parsing process for this descriptor is specified in subclause 9.19.4.

HEVC

7.3 Syntax in tabular form

7.3.1 NAL unit syntax

nal_unit(NumBytesInNALunit) {	Descriptor
forbidden_zero_bit	f(1)
nal_ref_idc	u(2)
nal_unit_type	u(5)
NumBytesInRBSP = 0	
nalUnitHeaderBytes = 1	
if(nal_unit_type == 1 nal_unit_type == 4 nal_unit_type == 5) {	
temporal_id	u(3)
output_flag	u(1)
reserved_one_4bits	u(4)
nalUnitHeaderBytes += 1	
}	
for(i = nalUnitHeaderBytes; i < NumBytesInNALunit; i++) {	
if(i + 2 < NumBytesInNALunit && next_bits(24) == 0x000003) {	
rbsp_byte [NumBytesInRBSP++]	b(8)
rbsp_byte [NumBytesInRBSP++]	b(8)
i += 2	
emulation_prevention_three_byte /* equal to 0x03 */	f(8)
} else	
rbsp_byte [NumBytesInRBSP++]	b(8)
}	
}	

HEVC

7.3.2 Raw byte sequence payloads and RBSP trailing bits syntax

7.3.2.1 Sequence parameter set RBSP syntax

seq_parameter_set_rbsp() {	Descriptor
profile_idc	u(8)
reserved_zero_8bits /* equal to 0 */	u(8)
level_idc	u(8)
seq_parameter_set_id	ue(v)
max_temporal_layers_minus1	u(3)
pic_width_in_luma_samples	u(16)
pic_height_in_luma_samples	u(16)
bit_depth_luma_minus8	ue(v)
bit_depth_chroma_minus8	ue(v)
<u>pcm_bit_depth_luma_minus1</u>	<u>u(4)</u>
<u>pcm_bit_depth_chroma_minus1</u>	<u>u(4)</u>
log2_max_frame_num_minus4	ue(v)
pic_order_cnt_type	ue(v)
if(pic_order_cnt_type == 0)	
log2_max_pic_order_cnt_lsb_minus4	ue(v)
else if(pic_order_cnt_type == 1) {	
delta_pic_order_always_zero_flag	u(1)
offset_for_non_ref_pic	se(v)
num_ref_frames_in_pic_order_cnt_cycle	ue(v)
for(i = 0; i < num_ref_frames_in_pic_order_cnt_cycle; i++)	
offset_for_ref_frame[i]	se(v)
}	
max_num_ref_frames	ue(v)
gaps_in_frame_num_value_allowed_flag	u(1)
log2_min_coding_block_size_minus3	ue(v)
log2_diff_max_min_coding_block_size	ue(v)
log2_min_transform_block_size_minus2	ue(v)
log2_diff_max_min_transform_block_size	ue(v)
<u>log2_min_pcm_coding_block_size_minus3</u>	<u>ue(v)</u>
max_transform_hierarchy_depth_inter	ue(v)
max_transform_hierarchy_depth_intra	ue(v)
<u>chroma_pred_from_luma_enabled_flag</u>	<u>u(1)</u>
<u>loop_filter_across_slice_flag</u>	<u>u(1)</u>
sample_adaptive_offset_enabled_flag	u(1)
adaptive_loop_filter_enabled_flag	u(1)
<u>pcm_loop_filter_disable_flag</u>	<u>u(1)</u>
cu_qp_delta_enabled_flag	u(1)
temporal_id_nesting_flag	u(1)
rbsp_trailing_bits()	
}	

HEVC

7.3.2.2 Picture parameter set RBSP syntax

pic_parameter_set_rbsp() {	Descriptor
pic_parameter_set_id	ue(v)
seq_parameter_set_id	ue(v)
entropy_coding_mode_flag	u(1)
num_temporal_layer_switching_point_flags	ue(v)
for(i = 0; i < num_temporal_layer_switching_point_flags; i++)	
temporal_layer_switching_point_flag[i]	u(1)
num_ref_idx_l0_default_active_minus1	ue(v)
num_ref_idx_l1_default_active_minus1	ue(v)
pic_init_qp_minus26 /* relative to 26 */	se(v)
constrained_intra_pred_flag	u(1)
<u>slice_granularity</u>	<u>u(2)</u>
shared_pps_info_enabled_flag	u(1)
if(shared_pps_info_enabled_flag)	
if(adaptive_loop_filter_enabled_flag)	
alf_param()	
if(cu_qp_delta_enabled_flag)	
max_cu_qp_delta_depth	u(4)
rbsp_trailing_bits()	
}	

7.3.2.3 Supplemental enhancement information RBSP syntax

sei_rbsp() {	Descriptor
do	
sei_message()	
while(more_rbsp_data())	
rbsp_trailing_bits()	
}	

HEVC

7.3.2.3.1 Supplemental enhancement information message syntax

	Descriptor
sei_message() {	
payloadType = 0	
while(next_bits(8) == 0xFF) {	
ff_byte /* equal to 0xFF */	f(8)
payloadType += 255	
}	
last_payload_type_byte	u(8)
payloadType += last_payload_type_byte	
payloadSize = 0	
while(next_bits(8) == 0xFF) {	
ff_byte /* equal to 0xFF */	f(8)
payloadSize += 255	
}	
last_payload_size_byte	u(8)
payloadSize += last_payload_size_byte	
sei_payload(payloadType, payloadSize)	
}	

Formatted: Heading 5, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

7.3.2.4 Access unit delimiter RBSP syntax

	Descriptor
access_unit_delimiter_rbsp() {	
primary_pic_type	u(3)
rbsp_trailing_bits()	
}	

7.3.2.5 Filler data RBSP syntax

	Descriptor
filler_data_rbsp() {	
while(next_bits(8) == 0xFF)	
ff_byte /* equal to 0xFF */	f(8)
rbsp_trailing_bits()	
}	

7.3.2.6 Slice layer RBSP syntax

	Descriptor
slice_layer_rbsp() {	
slice_header()	
slice_data()	
rbsp_slice_trailing_bits()	
}	

HEVC

7.3.2.7 RBSP slice trailing bits syntax

rbsp_slice_trailing_bits() {	Descriptor
rbsp_trailing_bits()	
if(entropy_coding_mode_flag)	
while(more_rbsp_trailing_data())	
cabac_zero_word /* equal to 0x0000 */	f(16)
}	

7.3.2.8 RBSP trailing bits syntax

rbsp_trailing_bits() {	Descriptor
rbsp_stop_one_bit /* equal to 1 */	f(1)
while(!byte_aligned())	
rbsp_alignment_zero_bit /* equal to 0 */	f(1)
}	

HEVC

7.3.3 Slice header syntax

slice_header() {	Descriptor
—first_tb_in_slice	ue(+)
entropy_slice_flag lightweight_slice_flag	u(1)
if(! entropy lightweight _slice_flag) {	
slice_type	ue(v)
pic_parameter_set_id	ue(v)
frame_num	u(v)
if(!drPicFlag)	
idr_pic_id	ue(v)
if(pic_order_cnt_type == 0)	
pic_order_cnt_lsb /*	u(v)
if(slice_type == P slice_type == B) {	
num_ref_idx_active_override_flag	u(1)
if(num_ref_idx_active_override_flag) {	
num_ref_idx_l0_active_minus1	ue(v)
if(slice_type == B)	
num_ref_idx_l1_active_minus1	ue(v)
}	
}	
ref_pic_list_modification()	
ref_pic_list_combination()	
if(nal_ref_idc != 0)	
dec_ref_pic_marking()	
—}	
—if(entropy_coding_mode_flag && slice_type != I)	
— cabac_init_idc	ue(v)
—first slice in pic flag	<u>u(1)</u>
if(first_slice_in_pic_flag == 0)	
—slice address	<u>u(v)</u>
if(! lightweight_slice_flag) {	
slice_qp_delta	se(v)
if(sample_adaptive_offset_enabled_flag)	
sao_param()	
if(deblocking_filter_control_present_flag) {	
disable_deblocking_filter_idc	
if(disable_deblocking_filter_idc != 1) {	
slice_alpha_c0_offset_div2	
slice_beta_offset_div2	
}	

Formatted: Font: Bold

Formatted: Font: Bold

HEVC

}	
if(slice_type == B)	
collocated_from_l0_flag	u(1)
if(adaptive_loop_filter_enabled_flag) {	
if(!shared_pps_info_enabled_flag)	
alf_param()	
alf_cu_control_param()	
}	
}-else	
<del> if(entropy_coding_mode_flag && slice_type != I)</del>	
<del> caba_init_idc</del>	ue(v)
}	

7.3.3.1 Reference picture list modification syntax

ref_pic_list_modification() {	Descriptor
if(slice_type % 5 != 2 && slice_type % 5 != 4) {	
ref_pic_list_modification_flag_l0	u(1)
if(ref_pic_list_modification_flag_l0)	
do {	
modification_of_pic_nums_idc	ue(v)
if(modification_of_pic_nums_idc == 0 modification_of_pic_nums_idc == 1)	
abs_diff_pic_num_minus1	ue(v)
else if(modification_of_pic_nums_idc == 2)	
long_term_pic_num	ue(v)
} while(modification_of_pic_nums_idc != 3)	
}	
if(slice_type % 5 == 1) {	
ref_pic_list_modification_flag_l1	u(1)
if(ref_pic_list_modification_flag_l1)	
do {	
modification_of_pic_nums_idc	ue(v)
if(modification_of_pic_nums_idc == 0 modification_of_pic_nums_idc == 1)	
abs_diff_pic_num_minus1	ue(v)
else if(modification_of_pic_nums_idc == 2)	
long_term_pic_num	ue(v)
} while(modification_of_pic_nums_idc != 3)	
}	
}	

7.3.3.2 Reference picture lists combination syntax

HEVC

ref_pic_list_combination() {	C	Descriptor
if(slice_type % 5 == 1) { // b slice		
ref_pic_list_combination_flag	2	u(1)
if(ref_pic_list_combination_flag) {		
num_ref_idx_lc_active_minus1	2	ue(v)
ref_pic_list_modification_flag_lc	2	u(1)
if(ref_pic_list_modification_flag_lc)		
for (i=0; i <= num_ref_idx_lc_active_minus1; i++) {		
pic_from_list_0_flag	2	u(1)
ref_idx_list_curr	2	ue(v)
}		
}		
}		
}		

7.3.3.3 Decoded reference picture marking syntax

dec_ref_pic_marking() {	Descriptor
if(IdrPicFlag) {	
no_output_of_prior_pics_flag	u(1)
long_term_reference_flag	u(1)
} else {	
adaptive_ref_pic_marking_mode_flag	u(1)
if(adaptive_ref_pic_marking_mode_flag)	
do {	
memory_management_control_operation	ue(v)
if(memory_management_control_operation == 1 memory_management_control_operation == 3)	
difference_of_pic_nums_minus1	ue(v)
if(memory_management_control_operation == 2)	
long_term_pic_num	ue(v)
if(memory_management_control_operation == 3 memory_management_control_operation == 6)	
long_term_frame_idx	ue(v)
if(memory_management_control_operation == 4)	
max_long_term_frame_idx_plus1	ue(v)
} while(memory_management_control_operation != 0)	
}	
}	

7.3.3.4 Sample adaptive offset parameter syntax

HEVC

sao_param() {	C	Descriptor
sample_adaptive_offset_flag	2	u(1)
if (sample_adaptive_offset_flag) {		
sao_split_param(0, 0, 0)		
sao_offset_param(0, 0, 0)		
}		
}		

sao_split_param(x0, y0, saoDepth) {	C	Descriptor
if(saoDepth < SaoMaxDepth)		
sao_split_flag [saoDepth][x0][y0]	2	u(1) ae(v)
if(sao_split_flag[saoDepth][x0][y0]) {		
sao_split_param(x0 + 0, y0 + 0, saoDepth + 1)		
sao_split_param(x0 + 1, y0 + 0, saoDepth + 1)		
sao_split_param(x0 + 0, y0 + 1, saoDepth + 1)		
sao_split_param(x0 + 1, y0 + 1, saoDepth + 1)		
}		
}		

[Ed.: (WJ) is it better to assign separate section?]

sao_offset_param(x0, y0, saoDepth) {	C	Descriptor
if(sao_split_flag[saoDepth][x0][y0]) {		
sao_offset_param(x0 + 0, y0 + 0, saoDepth + 1)		
sao_offset_param(x0 + 1, y0 + 0, saoDepth + 1)		
sao_offset_param(x0 + 0, y0 + 1, saoDepth + 1)		
sao_offset_param(x0 + 1, y0 + 1, saoDepth + 1)		
} else {		
sao_type_idx [saoDepth][x0][y0]	2	ue(v) ae(v)
if(sao_type_idx[saoDepth][x0][y0] != 0)		
for(i = 0; i < NumSaoClass; i++)		
sao_offset [saoDepth][x0][y0][i]	2	se(v) ae(v)
}		
}		

[Ed.: (WJ) is it better to assign separate section?]

HEVC

7.3.3.5 Adaptive loop filter parameter syntax

alf_param() {	C	Descriptor
adaptive_loop_filter_flag	2	u(1)
if (adaptive_loop_filter_flag) {		
alf_region_adaptation_flag	2	u(1)
alf_length_luma_minus_5_div2	2	ue(v)
alf_no_filters_minus1	2	ue(v)
if (alf_no_filters_minus1 == 1)		
alf_start_second_filter	2	ue(v)
else if (alf_no_filters_minus1 > 1) {		
for (i=0; i<16; i++)		
alf_filter_pattern[i]	2	u(1)
}		
if (AlfNumFilters > 1)		
alf_pred_method	2	u(1)
alf_min_kstart_minus1	2	ue(v)
for (i=0; i<AlfMaxDepth; i++)		
alf_golomb_index_bit[i]	2	u(1)
for (i=0; i<AlfNumFilters; i++)		
for (j=0; j<AlfCodedLengthLuma; j++)		
alf_coeff_luma[i][j]		ge(v)
alf_chroma_idc	2	ue(v)
if (alf_chroma_idc) {		
alf_length_chroma_minus_5_div2	2	ue(v)
for(i = 0; i<AlfCodedLengthChroma; i++)		
alf_coeff_chroma[i]		se(v)
}		
}		
}		

7.3.3.6 Adaptive loop filter coding unit control parameter syntax

alf_cu_control_param() {	C	Descriptor
if(adaptive_loop_filter_flag) {		
alf_cu_control_flag	2	u(1)
if(alf_cu_control_flag) {		
alf_cu_control_max_depth	2	ue(v)
~~if(alf_cu_control_max_depth)~~		
~~alf_length_cu_control_info~~	2	~~ue~~ (v)
for(i = 0; i < NumAlfCuFlag; i++)		
alf_cu_flag[i]	2	u(1) ae(v)
}		
}		
}		

HEVC

7.3.4 Slice data syntax

slice_data() {	Descriptor
CurrTbAddr = first_tb_in_sliceLCUAddress	
moreDataFlag = 1	
if(adaptive_loop_filter_flag && alf_cu_control_flag)	
AlfCuFlagIdx = -1	
do {	
xCU = HorLumaLocation(CurrTbAddr)	
yCU = VerLumaLocation(CurrTbAddr)	
moreDataFlag = coding_tree(xCU, yCU, Log2TbSize)	
if(!entropy_coding_mode_flag)	
moreDataFlag = more_rbsp_data()	
else {	
end_of_slice_flag	ae(v)
moreDataFlag = !end_of_slice_flag	
}	
CurrTbAddr = NextTbAddress(CurrTbAddr)	
} while(moreDataFlag)	
}	

HEVC

7.3.5 Coding tree syntax

coding_tree(x0, y0, log2CUSize) {	Descriptor
if(x0 + (1 << log2CUSize) <= PicWidthInSamples _L && y0 + (1 << log2CUSize) <= PicHeightInSamples _L && cuAddress(x0, y0) >= SliceAddress) {	
if(!entropy_coding_mode_flag && slice_type != I)	
cu_split_pred_part_mode [x0][y0]	ce(v)
else if(log2CUSize > Log2MinCUSize)	
split_coding_unit_flag [x0][y0]	u(1) ae(v)
}	
if(adaptive_loop_filter_flag && alf_cu_control_flag) {	
cuDepth = Log2MaxCUSize - log2CUSize	
if(cuDepth <= alf_cu_control_max_depth)	
if(cuDepth == alf_cu_control_max_depth	
split_coding_unit_flag[x0][y0] == 0)	
AlfCuFlagIdx++	
}	
if(split_coding_unit_flag[x0][y0]) {	
if(cu_qp_depta_enabled_flag && log2CUSize == log2MinCUDQPSize)	
IsCuQpDeltaCoded = 0	
x1 = x0 + ((1 << log2CUSize) >> 1)	
y1 = y0 + ((1 << log2CUSize) >> 1)	
if(cuAddress(x1, y0) > SliceAddress)	
moreDataFlag = coding_tree(x0, y0, log2CUSize - 1)	
if(cuAddress(x0, y1) > SliceAddress && moreDataFlag && x1 < PicWidthInSamples _L)	
moreDataFlag = coding_tree(x1, y0, log2CUSize - 1)	
if(cuAddress(x1, y1) > SliceAddress && moreDataFlag && y1 < PicHeightInSamples _L)	
moreDataFlag = coding_tree(x0, y1, log2CUSize - 1)	
if(moreDataFlag && x1 < PicWidthInSamples _L && y1 < PicHeightInSamples _L)	
moreDataFlag = coding_tree(x1, y1, log2CUSize - 1)	
} else {	
if(adaptive_loop_filter_flag && alf_cu_control_flag)	
AlfCuFlag[x0][y0] = alf_cu_flag[AlfCuFlagIdx]	
coding_unit(x0, y0, log2CUSize)	
if(!entropy_coding_mode_flag)	
moreDataFlag = more_rbsp_data()	
else {	
if(granularity_block_boundary(x0, y0, log2CUSize)) {	
end of slice flag	ae(v)
moreDataFlag = !end_of_slice_flag	
} else	
moreDataFlag = 1	
}	
}	
return moreDataFlag	
}	

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: (Asian) Korean, (Other) English (United States)

Formatted: Font: Bold

HEVC

[Ed. (WJ): cuAddress(x, y) returns the address of the smallest coding unit at (x, y), expressed in global decoding order smallest coding unit coordinates. granularity_block_boundary(x0, y0, log2CUsSize) returns true when the coding unit specified by (x0, y0, log2CUsSize) is the last coding unit in the slice in global decoding order. These functions are not defined yet. They will be added later.]

7.3.6 Coding unit syntax

coding_unit(x0, y0, log2CUsSize) {	Descriptor
if(entropy_coding_mode_flag && slice_type != I)	
skip_flag [x0][y0]	u(1) ae(v)
if(skip_flag[x0][y0])	
prediction_unit(x0, y0, log2CUsSize, log2CUsSize, 0, 0)	
else {	
if(!entropy_coding_mode_flag) {	
if(slice_type == I && log2CUsSize == Log2MinCUsSize)	
intra_part_mode	u(1)
} else if(slice_type != I log2CUsSize == Log2MinCUsSize)	
pred_type	u(v) ae(v)
x1 = x0 + ((1 << log2CUsSize) >> 1)	
y1 = y0 + ((1 << log2CUsSize) >> 1)	
if(PartMode == PART_2Nx2N) {	
prediction_unit(x0, y0, log2CUsSize, log2CUsSize, 0, 0)	
} else if(PartMode == PART_2NxN) {	
prediction_unit(x0, y0, log2CUsSize, log2CUsSize - 1, 0, log2CUsSize > Log2MinCUsSize)	
prediction_unit(x0, y1, log2CUsSize, log2CUsSize - 1, 1, 0)	
} else if(PartMode == PART_Nx2N) {	
prediction_unit(x0, y0, log2CUsSize - 1, log2CUsSize, 0, log2CUsSize > Log2MinCUsSize)	
prediction_unit(x1, y0, log2CUsSize - 1, log2CUsSize, 1, 0)	
} else { /* PART_NxN */	
prediction_unit(x0, y0, log2CUsSize - 1, log2CUsSize - 1, 0, 0)	
prediction_unit(x1, y0, log2CUsSize - 1, log2CUsSize - 1, 1, 0)	
prediction_unit(x0, y1, log2CUsSize - 1, log2CUsSize - 1, 2, 0)	
prediction_unit(x1, y1, log2CUsSize - 1, log2CUsSize - 1, 3, 0)	
}	
}	
if(!pcm_flag) {	
transform_tree(x0, y0, log2CUsSize, 0, 0)	
transform_coeff(x0, y0, log2CUsSize, 0, 0)	
transform_coeff(x0, y0, log2CUsSize, 0, 1)	
transform_coeff(x0, y0, log2CUsSize, 0, 2)	
}	
}	

HEVC

7.3.7 Prediction unit syntax

prediction_unit(x0, y0, log2PUWidth, log2PUHeight, PartIdx , InferredMergeFlag) {	Descriptor
if(skip_flag[x0][y0]) {	
if(NumMergeCand > 1)	
merge_idx[x0][y0]	ue(v) ae(v)
} else if(PredMode == MODE_INTRA) {	
if(PartMode == PART_2Nx2N && log2PUWidth >= Log2IPCMCUSize)	
pcm_flag	u(1) ae(v)
if(pcm_flag) {	
while (!byte_aligned())	
pcm_alignment_zero_bit	u(v)
for(i = 0; i < 1 << (log2CUSize << 1); i++)	
pcm_sample_luma[i]	u(v)
for(i = 0; i < (1 << (log2CUSize << 1)) >> 1; i++)	
pcm_sample_chroma[i]	u(v)
} else {	
prev_intra_luma_pred_flag[x0][y0]	u(1) ae(v)
if(prev_intra_luma_pred_flag[x0][y0])	
if(NumMPMCand > 1)	
mpm_idx[x0][y0]	u(1) ae(v)
else	
rem_intra_luma_pred_mode[x0][y0]	ce(v) ae(v)
if(IntraPredMode[x0][y0] == 2)	
planar_flag_luma[x0][y0]	u(1) ae(v)
intra_chroma_pred_mode[x0][y0]	ue(v) ae(v)
SignaledAsChromaDC = (chroma_pred_from_luma_enabled_flag ? intra_chroma_pred_mode[x0][y0] == 3 : intra_chroma_pred_mode[x0][y0] == 2)	
if(IntraPredMode[x0][y0] != 2 && IntraPredMode[x0][y0] != 34 && SignaledAsChromaDC)	
planar_flag_chroma[x0][y0]	u(1) ae(v)
}	
} else { /* MODE_INTER */	
if(!InferredMergeFlag)	
if(entropy_coding_mode_flag PartMode != PART_2Nx2N)	
merge_flag[x0][y0]	u(1) ae(v)
if(merge_flag[x0][y0] && NumMergeCand > 1) {	
merge_idx[x0][y0]	ue(v) ae(v)
} else {	
if(slice_type == B) {	
if(!entropy_coding_mode_flag && use_combined_inter_pred_ref(x0, y0)) {	
combined_inter_pred_ref_idx	ue(v)
if(combined_inter_pred_ref_idx == MaxPredRef)	
inter_pred_flag[x0][y0]	ue(v)
} else {	
inter_pred_flag[x0][y0]	ue(v) ae(v)

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Highlight

Formatted: Font: Bold

Formatted: English (United States)

Formatted: English (United States)

Formatted: Highlight

Formatted: Highlight

Formatted: English (United States)

Formatted: Font: Bold

Formatted: English (United States)

Formatted: English (United States)

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: English (United States)

HEVC

_____ }	
if(inter_pred_flag[x0][y0] == Pred_LC) {	
if(num_ref_idx_lc_active_minus1 > 0) {	
if(!entropy_coding_mode_flag && use_combined_inter_pred_ref(x0, y0)) {	
if(combined_inter_pred_ref_idx == MaxPredRef)	
ref_idx_lc_minus4[x0][y0]	ue(v)
_____ } else	
ref_idx_lc[x0][y0]	se(v) ae(v)
_____ }	
mvd_lc[x0][y0][0]	se(v) ae(v)
mvd_lc[x0][y0][1]	se(v) ae(v)
if(NumMVPCand(LcToLx) > 1)	
mvp_idx_lc[x0][y0]	ue(v) ae(v)
_____ }	
else { /* Pred_L0 or Pred_BI */	
if(num_ref_idx_l0_active_minus1 > 0) {	
ref_idx_l0_minusX[x0][y0]	ue(v) ae(v)
if(!entropy_coding_mode_flag && use_combined_inter_pred_ref(x0, y0)) {	
if(combined_inter_pred_ref_idx == MaxPredRef)	
ref_idx_l0_minusX[x0][y0]	ue(v)
_____ } else	
ref_idx_l0_minusX[x0][y0]	ue(v) ae(v)
_____ }	
mvd_l0[x0][y0][0]	se(v) ae(v)
mvd_l0[x0][y0][1]	se(v) ae(v)
if(NumMVPCand(L0) > 1)	
mvp_idx_l0[x0][y0]	ue(v) ae(v)
_____ }	
if(inter_pred_flag[x0][y0] == Pred_BI) {	
if(num_ref_idx_l1_active_minus1 > 0) {	
if(!entropy_coding_mode_flag && use_combined_inter_pred_ref(x0, y0)) {	
if(combined_inter_pred_ref_idx == MaxPredRef)	
ref_idx_l1_minusX[x0][y0]	ue(v)
_____ } else	
ref_idx_l1[x0][y0]	ue(v) ae(v)
_____ }	
mvd_l1[x0][y0][0]	se(v) ae(v)
mvd_l1[x0][y0][1]	se(v) ae(v)
if(NumMVPCand(L1) > 1)	
mvp_idx_l1[x0][y0]	ue(v) ae(v)
_____ }	
_____ }	
_____ }	

Formatted: Font: Bold

Formatted: English (United States)

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: English (United States)

[Ed: (BB) NumMergeCand needs to be defined. Decoding processes of neighboring blocks have to be finished to derive NumMergeCand. Same applies for NumMVPCand (TK) and NumMPPMCand]

[(TK) Note that the CAVLC syntax may be a little different for the prev_intra_luma_pred_flag[x0][y0] is incorporated into the coding of rem_intra_luma_pred_mode[x0][y0]. It should be decided where the syntax tables for CAVLC (LCEC) should diverge from that of the CABAC.]

[(TK) Note that in CAVLC decoding process, there is also a set of ranking tables and a set of code tables. The selection of these tables are conditional on the NumMPPMCand. These tables are available in JCTVC-E131 and should be added to the section for the description of the decoding process for the CAVLC (LCEC) if and when that section becomes available]

HEVC

7.3.8 Transform tree syntax

transform_tree(x0, y0, log2TrafoSize, trafoDepth, blkIdx) {	Descriptor
if(entropy_coding_mode_flag && trafoDepth == 0 && IntraSplitFlag == 0) {	
if(PredMode != MODE_INTRA)	
no_residual_data_flag	u(1) ae(v)
residualDataPresentFlag = !no_residual_data_flag	
} else {	
residualDataPresentFlag = TRUE	
}	
if(residualDataPresentFlag) {	
intraSplitFlag = (IntraSplitFlag && trafoDepth == 0 ? 1 : 0)	
maxDepth = (PredMode == MODE_INTRA ? max_transform_hierarchy_depth_intra + IntraSplitFlag : max_transform_hierarchy_depth_inter)	
if(!entropy_coding_mode_flag) {	
xB = x0 - (x0 & ((1 << log2TrafoSize) - 1))	
yB = y0 - (y0 & ((1 << log2TrafoSize) - 1))	
if(trafoDepth != 0 && !cbf_luma[xB][yB][trafoDepth - 1]) {	
if(cbf_cb[xB][yB][trafoDepth - 1] && log2TrafoSize > Log2MinTrafoSize)	
cbf_cb [x0][y0][trafoDepth]	u(1)
if(cbf_cr[xB][yB][trafoDepth - 1] && log2TrafoSize > Log2MinTrafoSize)	
cbf_cr [x0][y0][trafoDepth]	u(1)
if(log2TrafoSize <= Log2MaxTrafoSize && !intraSplitFlag && log2TrafoSize > Log2MinTrafoSize && trafoDepth < maxDepth)	
split_transform_flag [x0][y0][trafoDepth]	u(1)
} else	
cbp_and_split_transform	vlc(n,v)
}	
if(log2TrafoSize <= Log2MaxTrafoSize && log2TrafoSize > Log2MinTrafoSize && trafoDepth < maxDepth && !intraSplitFlag && entropy_coding_mode_flag)	
split_transform_flag [x0][y0][trafoDepth]	u(1) ae(v)
if(PredMode != MODE_INTRA && log2TrafoSize <= Log2MaxTrafoSize && entropy_coding_mode_flag) {	
firstChromaCbf = (log2TrafoSize == Log2MaxTrafoSize trafoDepth == 0 ? 1 : 0)	
if(firstChromaCbf log2TrafoSize > Log2MinTrafoSize) {	
xBase = x0 - (x0 & ((1 << log2TrafoSize) - 1))	
yBase = y0 - (y0 & ((1 << log2TrafoSize) - 1))	
if(firstChromaCbf cbf_cb[xBase][yBase][trafoDepth - 1])	
cbf_cb [x0][y0][trafoDepth]	u(1) ae(v)
if(firstChromaCbf cbf_cr[xBase][yBase][trafoDepth - 1])	
cbf_cr [x0][y0][trafoDepth]	u(1) ae(v)
}	
}	
if(split_transform_flag[x0][y0][trafoDepth]) {	
x1 = x0 + ((1 << log2TrafoSize) >> 1)	
y1 = y0 + ((1 << log2TrafoSize) >> 1)	

HEVC

transform_tree(x0, y0, log2TrafoSize - 1, trafoDepth + 1, 0)	
transform_tree(x1, y0, log2TrafoSize - 1, trafoDepth + 1, 1)	
transform_tree(x0, y1, log2TrafoSize - 1, trafoDepth + 1, 2)	
transform_tree(x1, y1, log2TrafoSize - 1, trafoDepth + 1, 3)	
} else if(entropy_coding_mode_flag){	
if(PredMode == MODE_INTRA trafoDepth != 0 cbf_cb[x0][y0][trafoDepth] cbf_cr[x0][y0][trafoDepth])	
cbf_luma [x0][y0][trafoDepth]	u(1) ae(v)
if(PredMode == MODE_INTRA)	
if(log2TrafoSize > Log2MinTrafoSize) {	
cbf_cb [x0][y0][trafoDepth]	u(1) ae(v)
cbf_cr [x0][y0][trafoDepth]	u(1) ae(v)
} else if(blkIdx == 0) {	
cbf_cb [x0][y0][trafoDepth - 1]	u(1) ae(v)
cbf_cr [x0][y0][trafoDepth - 1]	u(1) ae(v)
}	
}	
}	
}	

HEVC

7.3.9 Transform coefficient syntax

transform_coeff(x0, y0, log2TrafoSize, trafoDepth, cldx) {	Descriptor
if(((cldx == 0 && cbf_luma[x0][y0][trafoDepth]) (cldx == 1 && cbf_cb[x0][y0][trafoDepth]) (cldx == 2 && cbf_cr[x0][y0][trafoDepth]))) {	
if(cu_qp_delta_enabled_flag && !IsCuQpDeltaCoded) {	
cu_qp_delta	se(v) ae(v)
IsCuQpDeltaCoded = 1	
}	
if(split_transform_flag[x0][y0][trafoDepth]) {	
x1 = x0 + ((1 << log2TrafoSize) >> 1)	
y1 = y0 + ((1 << log2TrafoSize) >> 1)	
transform_coeff(x0, y0, log2TrafoSize - 1, trafoDepth + 1, cldx)	
transform_coeff(x1, y0, log2TrafoSize - 1, trafoDepth + 1, cldx)	
transform_coeff(x0, y1, log2TrafoSize - 1, trafoDepth + 1, cldx)	
transform_coeff(x1, y1, log2TrafoSize - 1, trafoDepth + 1, cldx)	
} else {	
if(PredMode == MODE_INTRA) {	
if(cldx == 0)	
scanIdx = ScanType[log2TrafoSize - 2][IntraPredMode]	
else	
scanIdx = ScanTypeC[log2TrafoSize - 2][IntraPredModeC]	
} else {	
scanIdx = 0	
}	
if(entropy_coding_mode_flag)	
residual_coding_cabac(x0, y0, log2TrafoSize, trafoDepth, scanIdx, cldx)	
else if(!entropy_coding_mode_flag)	
residual_coding_cavlc(x0, y0, log2TrafoSize, trafoDepth, scanIdx, cldx)	
}	
}	
}	

HEVC

7.3.10 Residual coding CABAC syntax

residual_coding_cabac(x0, y0, log2TrafoSize, trafoDepth, scanIdx, cldx) {	Descriptor
last_significant_coeff_x	ac(v)
last_significant_coeff_y	ac(v)
n = 0	
xC = ScanOrder[log2TrafoSize - 2][scanIdx][n][0]	
yC = ScanOrder[log2TrafoSize - 2][scanIdx][n][1]	
while((xC != last_significant_coeff_x) (yC != last_significant_coeff_y)) {	
significant_coeff_flag [xC][yC]	ac(v)
n++	
xC = ScanOrder[log2TrafoSize - 2][scanIdx][n][0]	
yC = ScanOrder[log2TrafoSize - 2][scanIdx][n][1]	
}	
numSubsets = max(1, (1 << (log2TrafoSize << 1)) >> (cldx > 0 ? 6 : 4))	
for(i = 0; i < numSubsets; i++) {	
offset = i << 4	
XS = ScanOrder[log2TrafoSize - 2][0][i][0] << 2	
YS = ScanOrder[log2TrafoSize - 2][0][i][1] << 2	
for(n = 0; n < 16; n++) {	
xOffset = n - (n >> 2) << 2	
yOffset = n >> 2	
if(significant_coeff_flag[xS + xOffset][yS + yOffset])	
coeff_abs_level_greater1_flag [n]	ac(v)
}	
for(n = 0; n < 16; n++) {	
if(coeff_abs_level_greater1_flag[n]) {	
coeff_abs_level_greater2_flag [n]	ac(v)
if(coeff_abs_level_greater2_flag[n])	
coeff_abs_level_minus3 [n]	ac(v)
}	
}	
for(n = 0; n < 16; n++) {	
xOffset = n - (n >> 2) << 2	
yOffset = n >> 2	
if(significant_coeff_flag[xS + xOffset][yS + yOffset]) {	
coeff_sign_flag [n]	ac(v)
transCoeffLevel[x0][y0][trafoDepth][cldx][n + offset] =	
(coeff_abs_level_minus3[n] + 3) * (1 - 2 * coeff_sign_flag[n])	
} else	
transCoeffLevel[x0][y0][trafoDepth][cldx][n + offset] = 0	
}	
}	
}	

7.3.11 Residual coding CAVLC syntax

HEVC

residual_coding_cavlc(x0, y0, log2TrafoSize, trafoDepth, cIdx) {	Descriptor
n = (1 << (log2TrafoSize << 1)) >> (cIdx > 0 ? 2 : 0)	
last_pos_level_one	ce(v)
lastPos = last_pos_level_one % n	
levelGreaterThanOneFlag = (last_pos_level_one > n)	
level_and_sign(levelGreaterThanOneFlag, transCoeffLevel, x0, y0, trafoDepth, cIdx, lastPos)	
runModeFlag = TRUE	
n = lastPos - 1	
sumBigCoeff = 0	
switchThres = (PredMode == MODE_INTRA && cIdx == 0) ? 0 : 49	
while (runModeFlag && n >= 0) {	
run_level_one	ce(v)
runOfZeros = run_level_one % n	
levelGreaterThanOneFlag = (run_level_one > n)	
trOne = (trOne == 0 levelGreaterThanOneFlag) ? 0 : Max(4, trOne + 1)	
n = n - runOfZeros	
if(n >= 0) {	
level_and_sign(levelGreaterThanOneFlag, transCoeffLevel, x0, y0, trafoDepth, cIdx, n)	
if (levelGreaterThanOneFlag) {	
sumBigCoeff = sumBigCoeff + level	
if (log2TrafoSize == 2 n > switchThres sumBigCoeff > 2)	
runModeFlag = FALSE	
}	
}	
n--	
}	
while (n >= 0) {	
level	ce(v)
if (level > 0) {	
sign_flag	u(1)
sign = 1 - 2 * sign_flag	
transCoeffLevel[x0][y0][trafoDepth][cIdx][n] = level * sign	
}	
n--	
}	
}	

7.3.12 Level and sign CAVLC syntax

HEVC

level_and_sign(levelGreaterThanOneFlag, transCoeffLevel, x0, y0, trafoDepth, cIdx, n) {	Descriptor
if (levelGreaterThanOneFlag) {	
level_minus2_and_sign	ce(v)
level = ((level_minus2_and_sign >> 1) + 2	
sign = 1 - 2*(level_minus2_and_sign & 1)	
transCoeffLevel[x0][y0][trafoDepth][cIdx][n] = level * sign	
}	
else {	
sign_flag	u(1)
transCoeffLevel[x0][y0][trafoDepth][cIdx][n] = 1 - 2 *(sign_flag)	
}	
}	

7.4 Semantics

Semantics associated with the syntax structures and with the syntax elements within these structures are specified in this subclause. When the semantics of a syntax element are specified using a table or a set of tables, any values that are not specified in the table(s) shall not be present in the bitstream unless otherwise specified in this Recommendation | International Standard.

7.4.1 NAL unit semantics

NOTE 1 – The VCL is specified to efficiently represent the content of the video data. The NAL is specified to format that data and provide header information in a manner appropriate for conveyance on a variety of communication channels or storage media. All data are contained in NAL units, each of which contains an integer number of bytes. A NAL unit specifies a generic format for use in both packet-oriented and bitstream systems. The format of NAL units for both packet-oriented transport and byte stream is identical except that each NAL unit can be preceded by a start code prefix and extra padding bytes in the byte stream format.

NumBytesInNALunit specifies the size of the NAL unit in bytes. This value is required for decoding of the NAL unit. Some form of demarcation of NAL unit boundaries is necessary to enable inference of NumBytesInNALunit. One such demarcation method is specified in Annex B for the byte stream format. Other methods of demarcation may be specified outside of this Recommendation | International Standard.

forbidden_zero_bit shall be equal to 0.

nal_ref_idc not equal to 0 specifies that the content of the NAL unit contains a sequence parameter set, a picture parameter set or a slice of a reference picture.

For coded video sequences conforming to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9, nal_ref_idc equal to 0 for a NAL unit containing a slice indicates that the slice is part of a non-reference picture.

nal_ref_idc shall not be equal to 0 for sequence parameter set or picture parameter set NAL units. When nal_ref_idc is equal to 0 for one NAL unit with nal_unit_type equal to 1 or 4 of a particular picture, it shall be equal to 0 for all NAL units with nal_unit_type equal to 1 or 4 of the picture.

nal_ref_idc shall not be equal to 0 for NAL units with nal_unit_type equal to 5.

nal_ref_idc shall be equal to 0 for all NAL units having nal_unit_type equal to 6, 9, 10, 11, or 12.

nal_unit_type specifies the type of RBSP data structure contained in the NAL unit as specified in Table 7-1.

NAL units that use nal_unit_type equal to 0 or in the range of 24..31, inclusive, shall not affect the decoding process specified in this Recommendation | International Standard.

NOTE 2 – NAL unit types 0 and 24..31 may be used as determined by the application. No decoding process for these values of nal_unit_type is specified in this Recommendation | International Standard. Since different applications might use NAL unit types 0 and 24..31 for different purposes, particular care must be exercised in the design of encoders that generate NAL units with nal_unit_type equal to 0 or in the range of 24 to 31, inclusive, and in the design of decoders that interpret the content of NAL units with nal_unit_type equal to 0 or in the range of 24 to 31, inclusive.

Decoders shall ignore (remove from the bitstream and discard) the contents of all NAL units that use reserved values of nal_unit_type.

NOTE 3 – This requirement allows future definition of compatible extensions to this Recommendation | International Standard.

HEVC

Table 7-17-1 – NAL unit type codes, syntax element categories, and NAL unit type classes

nal_unit_type	Content of NAL unit and RBSP syntax structure	NAL unit type class
0	Unspecified	non-VCL
1	Coded slice of a non-IDR and non-CDR picture slice_layer_rbsp()	VCL
2-3	Reserved	n/a
4	Coded slice of a CDR picture slice_layer_rbsp()	VCL
5	Coded slice of an IDR picture slice_layer_rbsp()	VCL
6	Supplemental enhancement information (SEI) sei_rbsp()	non-VCL
7	Sequence parameter set seq_parameter_set_rbsp()	non-VCL
8	Picture parameter set pic_parameter_set_rbsp()	non-VCL
9	Access unit delimiter access_unit_delimiter_rbsp()	non-VCL
10-11	Reserved	n/a
12	Filler data filler_data_rbsp()	non-VCL
13-23	Reserved	n/a
24..31	Unspecified	non-VCL

In the text, coded slice NAL unit collectively refers to a coded slice of a non-IDR picture NAL unit or to a coded slice of an IDR picture NAL unit. The variable IdrPicFlag is specified as

$$\text{IdrPicFlag} = ((\text{nal_unit_type} == 5) ? 1 : 0) \quad (7-1)$$

When the value of nal_unit_type is equal to 5 for a NAL unit containing a slice of a particular picture, the picture shall not contain NAL units with nal_unit_type equal to 1 or 4. For coded video sequences conforming to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9, such a picture is referred to as an IDR picture.

temporal_id specifies a temporal identifier for the NAL unit. The value of temporal_id shall be the same for all NAL units of an access unit. When an access unit contains any NAL unit with nal_unit_type equal to 5, temporal_id shall be equal to 0.

output_flag affects the decoded picture output and removal processes as specified in Annex C.

[Ed. KS: There is no output definition on Annex C yet]

reserved_one_4bits shall be equal to 1. Other values of reserved_one_4bits may be specified in the future by ITU-T | ISO/IEC. Decoders shall ignore the value of reserved_one_4bits.

rbsp_byte[i] is the i-th byte of an RBSP. An RBSP is specified as an ordered sequence of bytes as follows.

The RBSP contains an SODB as follows.

- If the SODB is empty (i.e., zero bits in length), the RBSP is also empty.
- Otherwise, the RBSP contains the SODB as follows:
 - 1) The first byte of the RBSP contains the (most significant, left-most) eight bits of the SODB; the next byte of the RBSP shall contain the next eight bits of the SODB, etc., until fewer than eight bits of the SODB remain.
 - 2) rbsp_trailing_bits() are present after the SODB as follows:

HEVC

- i) The first (most significant, left-most) bits of the final Rbsp byte contains the remaining bits of the SODB (if any).
 - ii) The next bit consists of a single `rbsp_stop_one_bit` equal to 1.
 - iii) When the `rbsp_stop_one_bit` is not the last bit of a byte-aligned byte, one or more `rbsp_alignment_zero_bit` is present to result in byte alignment.
- 3) One or more `cabac_zero_word` 16-bit syntax elements equal to 0x0000 may be present in some RBSPs after the `rbsp_trailing_bits()` at the end of the RBSP.

Syntax structures having these RBSP properties are denoted in the syntax tables using an "`_rbsp`" suffix. These structures shall be carried within NAL units as the content of the `rbsp_byte[ i ]` data bytes. The association of the RBSP syntax structures to the NAL units shall be as specified in [Table 7-1](#) ~~Table 7-1~~.

NOTE 6 – When the boundaries of the RBSP are known, the decoder can extract the SODB from the RBSP by concatenating the bits of the bytes of the RBSP and discarding the `rbsp_stop_one_bit`, which is the last (least significant, right-most) bit equal to 1, and discarding any following (less significant, farther to the right) bits that follow it, which are equal to 0. The data necessary for the decoding process is contained in the SODB part of the RBSP.

emulation_prevention_three_byte is a byte equal to 0x03. When an `emulation_prevention_three_byte` is present in the NAL unit, it shall be discarded by the decoding process.

The last byte of the NAL unit shall not be equal to 0x00.

Within the NAL unit, the following three-byte sequences shall not occur at any byte-aligned position:

- 0x000000
- 0x000001
- 0x000002

Within the NAL unit, any four-byte sequence that starts with 0x000003 other than the following sequences shall not occur at any byte-aligned position:

- 0x00000300
- 0x00000301
- 0x00000302
- 0x00000303

NOTE 7 – When `nal_unit_type` is equal to 0, particular care must be exercised in the design of encoders to avoid the presence of the above-listed three-byte and four-byte patterns at the beginning of the NAL unit syntax structure, as the syntax element `emulation_prevention_three_byte` cannot be the third byte of a NAL unit.

7.4.1.1 Encapsulation of an SODB within an RBSP (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

The form of encapsulation of an SODB within an RBSP and the use of the `emulation_prevention_three_byte` for encapsulation of an RBSP within a NAL unit is specified for the following purposes:

- to prevent the emulation of start codes within NAL units while allowing any arbitrary SODB to be represented within a NAL unit,
- to enable identification of the end of the SODB within the NAL unit by searching the RBSP for the `rbsp_stop_one_bit` starting at the end of the RBSP,
- to enable a NAL unit to have a size larger than that of the SODB under some circumstances (using one or more `cabac_zero_word`).

The encoder can produce a NAL unit from an RBSP by the following procedure:

1. The RBSP data is searched for byte-aligned bits of the following binary patterns:
'`00000000 00000000 000000xx`' (where `xx` represents any 2 bit pattern: 00, 01, 10, or 11),
and a byte equal to 0x03 is inserted to replace these bit patterns with the patterns:
'`00000000 00000000 00000011 000000xx`',

and finally, when the last byte of the RBSP data is equal to 0x00 (which can only occur when the RBSP ends in a `cabac_zero_word`), a final byte equal to 0x03 is appended to the end of the data. The last zero byte of a byte-aligned three-byte sequence 0x000000 in the RBSP (which is replaced by the four-byte sequence 0x00000300) is taken into account when searching the RBSP data for the next occurrence of byte-aligned bits with the binary patterns specified above.

HEVC

2. The resulting sequence of bytes is then prefixed as follows.
 - If `nal_unit_type` is not equal to 14 or 20, the sequence of bytes is prefixed with the first byte of the NAL unit containing the syntax elements `forbidden_zero_bit`, `nal_ref_idc`, and `nal_unit_type`, where `nal_unit_type` indicates the type of RBSP data structure the NAL unit contains.
 - Otherwise (`nal_unit_type` is equal to 14 or 20), the sequence of bytes is prefixed with the first four bytes of the NAL unit, where the first byte contains the syntax elements `forbidden_zero_bit`, `nal_ref_idc`, and `nal_unit_type` and the following three bytes contain the syntax structure `nal_unit_header_svc_extension()`. The syntax element `nal_unit_type` in the first byte indicates the presence of the syntax structure `nal_unit_header_svc_extension()` in the following three bytes and the type of RBSP data structure the NAL unit contains.

The process specified above results in the construction of the entire NAL unit.

This process can allow any SODB to be represented in a NAL unit while ensuring that

- no byte-aligned start code prefix is emulated within the NAL unit,
- no sequence of 8 zero-valued bits followed by a start code prefix, regardless of byte-alignment, is emulated within the NAL unit.

7.4.1.2 Order of NAL units and association to coded pictures, access units, and video sequences

This subclause specifies constraints on the order of NAL units in the bitstream.

Any order of NAL units in the bitstream obeying these constraints is referred to in the text as the decoding order of NAL units. Within a NAL unit, the syntax in subclauses 7.3, D.1, and E.1 specifies the decoding order of syntax elements. Decoders shall be capable of receiving NAL units and their syntax elements in decoding order.

7.4.1.2.1 Order of sequence and picture parameter set RBSPs and their activation

This subclause specifies the activation process of picture and sequence parameter sets for coded video sequences that conform to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9.

NOTE 1 – The sequence and picture parameter set mechanism decouples the transmission of infrequently changing information from the transmission of coded macroblock data. Sequence and picture parameter sets may, in some applications, be conveyed "out-of-band" using a reliable transport mechanism.

A picture parameter set RBSP includes parameters that can be referred to by the coded slice NAL units or coded slice data partition A NAL units of one or more coded pictures. Each picture parameter set RBSP is initially considered not active at the start of the operation of the decoding process. At most one picture parameter set RBSP is considered active at any given moment during the operation of the decoding process, and the activation of any particular picture parameter set RBSP results in the deactivation of the previously-active picture parameter set RBSP (if any).

When a picture parameter set RBSP (with a particular value of `pic_parameter_set_id`) is not active and it is referred to by a coded slice NAL unit or coded slice data partition A NAL unit (using that value of `pic_parameter_set_id`), it is activated. This picture parameter set RBSP is called the active picture parameter set RBSP until it is deactivated by the activation of another picture parameter set RBSP. A picture parameter set RBSP, with that particular value of `pic_parameter_set_id`, shall be available to the decoding process prior to its activation.

Any picture parameter set NAL unit containing the value of `pic_parameter_set_id` for the active picture parameter set RBSP for a coded picture shall have the same content as that of the active picture parameter set RBSP for the coded picture unless it follows the last VCL NAL unit of the coded picture and precedes the first VCL NAL unit of another coded picture.

A sequence parameter set RBSP includes parameters that can be referred to by one or more picture parameter set RBSPs or one or more SEI NAL units containing a buffering period SEI message. Each sequence parameter set RBSP is initially considered not active at the start of the operation of the decoding process. At most one sequence parameter set RBSP is considered active at any given moment during the operation of the decoding process, and the activation of any particular sequence parameter set RBSP results in the deactivation of the previously-active sequence parameter set RBSP (if any).

When a sequence parameter set RBSP (with a particular value of `seq_parameter_set_id`) is not already active and it is referred to by activation of a picture parameter set RBSP (using that value of `seq_parameter_set_id`) or is referred to by an SEI NAL unit containing a buffering period SEI message (using that value of `seq_parameter_set_id`), it is activated. This sequence parameter set RBSP is called the active sequence parameter set RBSP until it is deactivated by the activation of another sequence parameter set RBSP. A sequence parameter set RBSP, with that particular value of `seq_parameter_set_id`, shall be available to the decoding process prior to its activation. An activated sequence parameter set RBSP shall remain active for the entire coded video sequence.

HEVC

NOTE 2 – Because an IDR access unit begins a new coded video sequence and an activated sequence parameter set RBSP must remain active for the entire coded video sequence, a sequence parameter set RBSP can only be activated by a buffering period SEI message when the buffering period SEI message is part of an IDR access unit.

Any sequence parameter set NAL unit containing the value of `seq_parameter_set_id` for the active sequence parameter set RBSP for a coded video sequence shall have the same content as that of the active sequence parameter set RBSP for the coded video sequence unless it follows the last access unit of the coded video sequence and precedes the first VCL NAL unit and the first SEI NAL unit containing a buffering period SEI message (when present) of another coded video sequence.

NOTE 3 – If picture parameter set RBSP or sequence parameter set RBSP are conveyed within the bitstream, these constraints impose an order constraint on the NAL units that contain the picture parameter set RBSP or sequence parameter set RBSP, respectively. Otherwise (picture parameter set RBSP or sequence parameter set RBSP are conveyed by other means not specified in this Recommendation | International Standard), they must be available to the decoding process in a timely fashion such that these constraints are obeyed.

When present, a sequence parameter set extension RBSP includes parameters having a similar function to those of a sequence parameter set RBSP. For purposes of establishing constraints on the syntax elements of the sequence parameter set extension RBSP and for purposes of determining activation of a sequence parameter set extension RBSP, the sequence parameter set extension RBSP shall be considered part of the preceding sequence parameter set RBSP with the same value of `seq_parameter_set_id`. When a sequence parameter set RBSP is present that is not followed by a sequence parameter set extension RBSP with the same value of `seq_parameter_set_id` prior to the activation of the sequence parameter set RBSP, the sequence parameter set extension RBSP and its syntax elements shall be considered not present for the active sequence parameter set RBSP.

All constraints that are expressed on the relationship between the values of the syntax elements (and the values of variables derived from those syntax elements) in sequence parameter sets and picture parameter sets and other syntax elements are expressions of constraints that apply only to the active sequence parameter set and the active picture parameter set. If any sequence parameter set RBSP is present that is not activated in the bitstream, its syntax elements shall have values that would conform to the specified constraints if it were activated by reference in an otherwise-conforming bitstream. If any picture parameter set RBSP is present that is not ever activated in the bitstream, its syntax elements shall have values that would conform to the specified constraints if it were activated by reference in an otherwise-conforming bitstream.

During operation of the decoding process (see clause 0), the values of parameters of the active picture parameter set and the active sequence parameter set shall be considered in effect. For interpretation of SEI messages, the values of the parameters of the picture parameter set and sequence parameter set that are active for the operation of the decoding process for the VCL NAL units of the primary coded picture in the same access unit shall be considered in effect unless otherwise specified in the SEI message semantics.

7.4.1.2.2 Order of access units and association to coded video sequences

A bitstream conforming to this Recommendation | International Standard consists of one or more coded video sequences.

A coded video sequence consists of one or more access units. For coded video sequences that conform to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9, the order of NAL units and coded pictures and their association to access units is described in subclause 7.4.1.2.3.

The first access unit of each coded video sequence is an IDR access unit. All subsequent access units in the coded video sequence are non-IDR access units.

The values of picture order count for the coded pictures in consecutive access units in decoding order containing non-reference pictures shall be non-decreasing.

When present, an access unit following an access unit that contains an end of sequence NAL unit shall be an IDR access unit.

When an SEI NAL unit contains data that pertain to more than one access unit (for example, when the SEI NAL unit has a coded video sequence as its scope), it shall be contained in the first access unit to which it applies.

When an end of stream NAL unit is present in an access unit, this access unit shall be the last access unit in the bitstream and the end of stream NAL unit shall be the last NAL unit in that access unit.

7.4.1.2.3 Order of NAL units and coded pictures and association to access units

This subclause specifies the order of NAL units and coded pictures and association to access unit for coded video sequences that conform to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9.

HEVC

An access unit consists of one primary coded picture, zero or more corresponding redundant coded pictures, and zero or more non-VCL NAL units. The association of VCL NAL units to primary or redundant coded pictures is described in subclause 7.4.1.2.5.

The first access unit in the bitstream starts with the first NAL unit of the bitstream.

The first of any of the following NAL units after the last VCL NAL unit of a primary coded picture specifies the start of a new access unit:

- access unit delimiter NAL unit (when present),
- sequence parameter set NAL unit (when present),
- picture parameter set NAL unit (when present),
- SEI NAL unit (when present),
- NAL units with `nal_unit_type` in the range of 14 to 18, inclusive (when present),
- first VCL NAL unit of a primary coded picture (always present).

The constraints for the detection of the first VCL NAL unit of a primary coded picture are specified in subclause 7.4.1.2.4.

The following constraints shall be obeyed by the order of the coded pictures and non-VCL NAL units within an access unit:

- When an access unit delimiter NAL unit is present, it shall be the first NAL unit. There shall be at most one access unit delimiter NAL unit in any access unit.
- When any SEI NAL units are present, they shall precede the primary coded picture.
- When an SEI NAL unit containing a buffering period SEI message is present, the buffering period SEI message shall be the first SEI message payload of the first SEI NAL unit in the access unit.
- The primary coded picture shall precede the corresponding redundant coded pictures.
- NAL units having `nal_unit_type` equal to 0, 12, or in the range of 20 to 31, inclusive, shall not precede the first VCL NAL unit of the primary coded picture.

NOTE 1 – Sequence parameter set NAL units or picture parameter set NAL units may be present in an access unit, but cannot follow the last VCL NAL unit of the primary coded picture within the access unit, as this condition would specify the start of a new access unit.

The structure of access units not containing any NAL units with `nal_unit_type` equal to 0, 7, 8, or in the range of 12 to 18, inclusive, or in the range of 20 to 31, inclusive, is shown in [Figure 7-1](#). [Ed. (TW):adjust text and figure]

HEVC

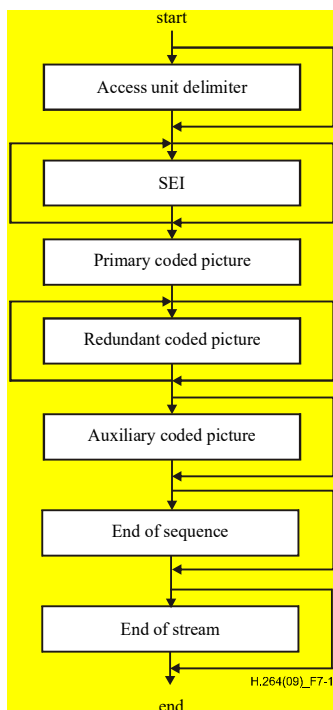


Figure 7-1 – Structure of an access unit not containing any NAL units with nal_unit_type equal to 0, 7, 8, or in the range of 12 to 18, inclusive, or in the range of 20 to 31, inclusive

7.4.1.2.4 Detection of the first VCL NAL unit of a primary coded picture

This subclause specifies constraints on VCL NAL unit syntax that are sufficient to enable the detection of the first VCL NAL unit of each primary coded picture for coded video sequences that conform to one or more of the profiles specified in Annex A that are decoded using the decoding process specified in clauses 2-9.

Any coded slice NAL unit or coded slice data partition A NAL unit of the primary coded picture of the current access unit shall be different from any coded slice NAL unit or coded slice data partition A NAL unit of the primary coded picture of the previous access unit in one or more of the following ways:

- **frame_num** differs in value. The value of **frame_num** used to test this condition is the value of **frame_num** that appears in the syntax of the slice header, regardless of whether that value is inferred to have been equal to 0 for subsequent use in the decoding process due to the presence of memory_management_control_operation equal to 5.
 NOTE 1 – A consequence of the above statement is that a primary coded picture having **frame_num** equal to 1 cannot contain a memory_management_control_operation equal to 5 unless some other condition listed below is fulfilled for the next primary coded picture that follows after it (if any).
- **pic_parameter_set_id** differs in value.
- **nal_ref_idc** differs in value with one of the **nal_ref_idc** values being equal to 0.
- **pic_order_cnt_type** is equal to 0 for both and either **pic_order_cnt_lsb** differs in value, or **delta_pic_order_cnt_bottom** differs in value.
- **pic_order_cnt_type** is equal to 1 for both and either **delta_pic_order_cnt[0]** differs in value, or **delta_pic_order_cnt[1]** differs in value.
- **IdrPicFlag** differs in value.
- **IdrPicFlag** is equal to 1 for both and **idr_pic_id** differs in value.

HEVC

7.4.1.2.5 Order of VCL NAL units and association to coded pictures

[Ed. (TW): insert text]

7.4.2 Raw byte sequence payloads and RBSP trailing bits semantics

7.4.2.1 Sequence parameter set RBSP semantics

profile_idc and **level_idc** indicate the profile and level to which the coded video sequence conforms.

reserved_zero_8bits shall be equal to 0. Decoders shall ignore the value of **reserved_zero_8bits**.

seq_parameter_set_id identifies the sequence parameter set that is referred to by the picture parameter set. The value of **seq_parameter_set_id** shall be in the range of 0 to 31, inclusive.

max_temporal_layers_minus1 + 1 specifies the maximum number of temporal layers present in the sequence. The value of **max_temporal_layers_minus1** shall be in the range of 0 to 7, inclusive.

pic_width_in_luma_samples specifies the width of each decoded picture in luma samples. The value of **pic_width_in_luma_samples** shall be in the range of 0 to $2^{16}-1$, inclusive.

pic_height_in_luma_samples specifies the height of each decoded picture in luma samples. The value of **pic_height_in_luma_samples** shall be in the range of 0 to $2^{16}-1$, inclusive.

bit_depth_luma_minus8 + 8 specifies the bit depth of the samples of the luma array and the value of the luma quantisation parameter range offset **QpBdOffset_y**, as specified by

$$\text{BitDepth}_y = 8 + \text{bit_depth_luma_minus8} \tag{7-2}$$

$$\text{QpBdOffset}_y = 6 * \text{bit_depth_luma_minus8} \tag{7-3}$$

bit_depth_luma_minus8 shall be in the range of 0 to 6, inclusive.

bit_depth_chroma_minus8 + 8 specifies the bit depth of the samples of the chroma arrays and the value of the chroma quantisation parameter range offset **QpBdOffset_c**, as specified by

$$\text{BitDepth}_c = 8 + \text{bit_depth_chroma_minus8} \tag{7-4}$$

$$\text{QpBdOffset}_c = 6 * \text{bit_depth_chroma_minus8} \tag{7-5}$$

bit_depth_chroma_minus8 shall be in the range of 0 to 6, inclusive.

pcm_sample_bit_depth_luma_minus1 + 1 specifies the number of bits used to represent each of PCM sample values of luma component. The value of **pcm_sample_bit_depth_luma_minus1** + 1 shall be smaller than or equal to the value of **BitDepth_y**.

$$\text{PCMBitDepth}_y = 1 + \text{pcm_sample_bit_depth_luma_minus1} \tag{7-664}$$

pcm_sample_bit_depth_chroma_minus1 + 1 specifies the number of bits used to represent each of PCM sample values of chroma components. The value of **pcm_sample_bit_depth_chroma_minus1** + 1 shall be smaller than or equal to the value of **BitDepth_c**.

$$\text{PCMBitDepth}_c = 1 + \text{pcm_sample_bit_depth_chroma_minus1} \tag{7-774}$$

log2_max_frame_num_minus4 specifies the value of the variable **MaxFrameNum** that is used in **frame_num** related derivations as follows:

$$\text{MaxFrameNum} = 2^{(\text{log2_max_frame_num_minus4} + 4)} \tag{7-886}$$

The value of **log2_max_frame_num_minus4** shall be in the range of 0 to 12, inclusive.

pic_order_cnt_type specifies the method to decode picture order count (as specified in subclause XX). The value of **pic_order_cnt_type** shall be in the range of 0 to 2, inclusive.

pic_order_cnt_type shall not be equal to 2 in a coded video sequence that contains an access unit containing a non-reference **frame** followed immediately by an access unit containing a non-reference picture,

log2_max_pic_order_cnt_lsb_minus4 specifies the value of the variable **MaxPicOrderCntLsb** that is used in the decoding process for picture order count as follows:

HEVC

Formatted: Font: Bold

Formatted: Subscript

Formatted: Subscript

Formatted: Indent: Left: 0.5", Space Before: 9.65 pt, After: 12 pt, Tab stops: 3.37", Centered + 6.74", Right

Formatted: Font: Bold

Formatted: Subscript

$$\text{MaxPicOrderCntLsb} = 2^{(\log_2 \text{max_pic_order_cnt_lsb_minus4} + 4)} \quad (7-997)$$

The value of `log2_max_pic_order_cnt_lsb_minus4` shall be in the range of 0 to 12, inclusive.

delta_pic_order_always_zero_flag equal to 1 specifies that `delta_pic_order_cnt[ 0 ]` and `delta_pic_order_cnt[ 1 ]` are not present in the slice headers of the sequence and shall be inferred to be equal to 0. `delta_pic_order_always_zero_flag` equal to 0 specifies that `delta_pic_order_cnt[ 0 ]` is present in the slice headers of the sequence and `delta_pic_order_cnt[ 1 ]` may be present in the slice headers of the sequence.

offset_for_non_ref_pic is used to calculate the picture order count of a non-reference picture as specified in subclause XX. The value of `offset_for_non_ref_pic` shall be in the range of $-2^{31}+1$ to $2^{31}-1$, inclusive.

num_ref_frames_in_pic_order_cnt_cycle is used in the decoding process for picture order count as specified in subclause XX. The value of `num_ref_frames_in_pic_order_cnt_cycle` shall be in the range of 0 to 255, inclusive.

offset_for_ref_frame[i] is an element of a list of `num_ref_frames_in_pic_order_cnt_cycle` values used in the decoding process for picture order count as specified in subclause XX. The value of `offset_for_ref_frame[ i ]` shall be in the range of $-2^{31}+1$ to $2^{31}-1$, inclusive.

When `pic_order_cnt_type` is equal to 1, the variable `ExpectedDeltaPerPicOrderCntCycle` is derived by

```
ExpectedDeltaPerPicOrderCntCycle = 0
for( i = 0; i < num_ref_frames_in_pic_order_cnt_cycle; i++ )
    ExpectedDeltaPerPicOrderCntCycle += offset_for_ref_frame[ i ]
```

(7-10408)

max_num_ref_frames specifies the maximum number of short-term and long-term reference frames, complementary reference field pairs, and non-paired reference fields that may be used by the decoding process for inter prediction of any picture in the sequence. **max_num_ref_frames** also determines the size of the sliding window operation. The value of **max_num_ref_frames** shall be in the range of 0 to **MaxDpbFrames**, inclusive.

gaps_in_frame_num_value_allowed_flag specifies the allowed values of **frame_num** and the decoding process in case of an inferred gap between values of **frame_num**.

log2_min_coding_block_size_minus3 specifies the minimum size of a coding block.

The variable `Log2MinCUSize` is set equal to `log2_min_coding_block_size_minus3 + 3`.

log2_diff_max_min_coding_block_size specifies the difference between the maximum and minimum coding block size.

The variable `Log2MaxCUSize` is set equal to `log2_min_coding_block_size_minus3 + 3 + log2_diff_max_min_coding_block_size`.

log2_min_transform_block_size_minus2 specifies the minimum size of a transform block.

The variable `Log2MinTrafoSize` is set equal to `log2_min_transform_block_size_minus2 + 2`.

log2_diff_max_min_transform_block_size specifies the difference between the maximum and minimum transform size.

The variable `Log2MaxTrafoSize` is set equal to `log2_min_transform_block_size_minus2 + 2 + log2_diff_max_min_transform_block_size`.

The bitstream shall not contain data that result in `Log2MaxTrafoSize` greater than `Log2MaxCUSize`.

log2_min_pcm_coding_block_size_minus3 + 3 specifies the minimum size of I PCM coding blocks.

The variable `Log2MinIPCMCUSize` is set equal to `log2_min_pcm_coding_block_size_minus3 + 3`. The variable `Log2MinIPCMCUSize` should be equal or less than `Log2MaxCUSize`.

max_transform_hierarchy_depth_intra specifies the maximum hierarchy depth for transform blocks of coding blocks coded in intra prediction mode.

max_transform_hierarchy_depth_inter specifies the maximum hierarchy depth for transform units of coding units coded in inter prediction mode.

chroma_pred_from_luma_enabled_flag equal to 1 specifies the intra chroma prediction process using the reconstructed luma block is applied according to the intra chroma prediction mode.

loop_filter_across_slice_flag equal to 1 specifies the in-loop filtering operations are performed across slice boundary; otherwise, the in-loop operations are slice-independent and not across slice boundary. The in-loop filtering operations include deblocking filter, sample adaptive offset, and adaptive loop filter.

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

HEVC

sample_adaptive_offset_enabled_flag equal to 1 specifies the sample adaptive offset process is applied to the reconstructed picture after the deblocking filter process.

adaptive_loop_filter_enabled_flag equal to 1 specifies the adaptive loop filter process is applied to the reconstructed picture after the deblocking filter process.

pcm_loop_filter_disable_flag specifies whether the loop filter process is disabled on reconstructed pixels of I_PCM blocks. If the **pcm_loop_filter_disable_flag** value is equal to 1, both deblocking and adaptive loop filter processes on the reconstructed pixels of I_PCM blocks are disabled; otherwise the **pcm_loop_filter_disable_flag** value is equal to 0, both deblocking and adaptive loop filter processes on the reconstructed pixels of I_PCM blocks are not disabled.

[Ed. (WJ): select one expression – enabled_flag or disable_flag]

cu_qp_delta_enabled_flag equal to 1 specifies cu_qp_delta presents in coding unit layer to further modify the value of QP_Y.

temporal_id_nesting_flag specifies whether inter prediction is additionally restricted for the coded video sequence.

Dependent on temporal_id_nesting_flag, the following applies.

- If temporal_id_nesting_flag is equal to 0, additional constraints may not be obeyed.
- Otherwise (temporal_id_nesting_flag is equal to 1), the following applies.
 - For each access unit auA with temporal_id equal to tIdA, an access unit auB with temporal_id equal to tIdB and tIdB less than or equal to tIdA shall not be referenced by inter prediction when there exists an access unit auC with temporal_id equal to tIdC and tIdC less than tIdB, which follows the access unit auB and precedes the access unit auA in decoding order.

NOTE – The syntax element temporal_id_nesting_flag is used to indicate that temporal up-switching, i.e., switching from decoding of up to a specific temporal_id tIdN to decoding up to a temporal_id tIdM > tIdN, is always possible.

7.4.2.2 Picture parameter set RBSP semantics

pic_parameter_set_id identifies the picture parameter set that is referred to in the slice header. The value of pic_parameter_set_id shall be in the range of 0 to 255, inclusive.

seq_parameter_set_id refers to the active sequence parameter set. The value of seq_parameter_set_id shall be in the range of 0 to 31, inclusive.

entropy_coding_mode_flag selects the entropy decoding method to be applied for the syntax elements for which two descriptors appear in the syntax tables as follows.

- If entropy_coding_mode_flag is equal to 0, the method specified by the left descriptor in the syntax table is applied.
- Otherwise (entropy_coding_mode_flag is equal to 1), the method specified by the right descriptor in the syntax table is applied.

num_temporal_layer_switching_point_flags specifies how many temporal switching point flags are present. If temporal_id_nesting_flag is equal to 1, num_temporal_layer_switching_point_flags shall be equal to 0.

temporal_layer_switching_point_flag[i] specifies if the current access point is a temporal switching point allowing the decoding of higher temporal id layers following this access unit. If temporal_id_nesting_flag is equal to 1, temporal_layer_switching_point_flag[i] shall be inferred to be equal to 1. If temporal_id_nesting_flag is equal to 0 and num_temporal_layer_switching_point_flags is less than i, temporal_layer_switching_point_flag[i] shall be inferred to be equal to 0.

NOTE – When starting to decode a higher temporal layer i, availability of required reference pictures can be guaranteed immediately following an IDR, or a picture with the temporal_id value j lower than i and temporal_switching_flag[j] equal to 1.

num_ref_idx_l0_default_active_minus1 specifies how num_ref_idx_l0_active_minus1 is inferred for P and B slices with num_ref_idx_active_override_flag equal to 0. The value of num_ref_idx_l0_default_active_minus1 shall be in the range of 0 to 31, inclusive.

num_ref_idx_l1_default_active_minus1 specifies how num_ref_idx_l1_active_minus1 is inferred for B slices with num_ref_idx_active_override_flag equal to 0. The value of num_ref_idx_l1_default_active_minus1 shall be in the range of 0 to 31, inclusive.

pic_init_qp_minus26 specifies the initial value minus 26 of SliceQP_Y for each slice. The initial value is modified at the slice layer when a non-zero value of slice_qp_delta is decoded, and is modified further when a non-zero value of cu_qp_delta is decoded at the coding unit layer. The value of pic_init_qp_minus26 shall be in the range of $-(26 + QpBdOffset_Y)$ to +25, inclusive.

Formatted: Font: Bold

HEVC

constrained_intra_pred_flag equal to 0 specifies that intra prediction allows usage of residual data and decoded samples of neighbouring macroblocks coded using Inter macroblock prediction modes for the prediction of macroblocks coded using Intra macroblock prediction modes. **constrained_intra_pred_flag** equal to 1 specifies constrained intra prediction, in which case prediction of macroblocks coded using Intra macroblock prediction modes only uses residual data and decoded samples from I macroblock types.

slice_granularity indicates the slice granularity within a picture. The value of **slice_granularity** shall not be larger than $\text{Min}(\text{Log2MaxCUSize} - 4, \text{log2_diff_max_min_coding_block_size})$. The variable **SliceGranularity** is set to the value of $(\text{slice_granularity} \ll 1)$.

Formatted: Font: Bold

shared_pps_info_enabled_flag specifies the shared information in picture parameter set Rbsp shall be used for the referred slices. If **shared_pps_info_enabled_flag** is equal to 1, the **alf_param()** in picture parameter set Rbsp shall be applied for the referred slices; otherwise, the **alf_param()** in slice header(s) shall be applied.

max_cu_qp_delta_depth specifies the maximum allowed depth that is used for specifying QP_Y values for coding unit. The value of **max_cu_qp_delta_depth** shall be in the range of 0 to 15, inclusive.

The variable **log2MinCUDQPSize** specifying the minimum coding unit size that can further modifies the value of QP_Y as follows:

$$\text{log2MinCUDQPSize} = \text{Log2MaxCUSize} - \text{max_cu_qp_delta_depth} \quad (7-1117)$$

7.4.2.3 Supplemental enhancement information Rbsp semantics

Supplemental Enhancement Information (SEI) contains information that is not necessary to decode the samples of coded pictures from VCL NAL units.

7.4.2.3.1 Supplemental enhancement information message semantics

Formatted: Heading 5

An SEI Rbsp contains one or more SEI messages. Each SEI message consists of the variables specifying the type **payloadType** and size **payloadSize** of the SEI payload. SEI payloads are specified in Annex D. The derived SEI payload size **payloadSize** is specified in bytes and shall be equal to the number of Rbsp bytes in the SEI payload.

NOTE – The NAL unit byte sequence containing the SEI message might include one or more emulation prevention bytes (represented by **emulation_prevention_three_byte** syntax elements). Since the payload size of an SEI message is specified in Rbsp bytes, the quantity of emulation prevention bytes is not included in the size **payloadSize** of an SEI payload.

ff_byte is a byte equal to 0xFF identifying a need for a longer representation of the syntax structure that it is used within.

last_payload_type_byte is the last byte of the payload type of an SEI message.

last_payload_size_byte is the last byte of the payload size of an SEI message.

7.4.2.4 Access unit delimiter Rbsp semantics

The access unit delimiter may be used to indicate the type of slices present in a primary coded picture and to simplify the detection of the boundary between access units. There is no normative decoding process associated with the access unit delimiter.

primary_pic_type indicates that the **slice_type** values for all slices of the primary coded picture are members of the set listed in Table 7-2 for the given value of **primary_pic_type**.

Table 7-2 – Meaning of **primary_pic_type**

primary_pic_type	slice_type values that may be present in the primary coded picture
0	2
1	0, 2
2	0, 1, 2

7.4.2.5 Filler data Rbsp semantics

The filler data Rbsp contains bytes whose value shall be equal to 0xFF. No normative decoding process is specified for a filler data Rbsp.

ff_byte is a byte equal to 0xFF.

7.4.2.6 Slice layer RBSP semantics

The slice layer RBSP consists of a slice header and slice data.

[Ed. (TW): insert text]

7.4.2.7 RBSP slice trailing bits semantics

cabac_zero_word is a byte-aligned sequence of two bytes equal to 0x0000.

Let NumBytesInVclNALunits be the sum of the values of NumBytesInNALunit for all VCL NAL units of a coded picture.

Let BinCountsInNALunits be the number of times that the parsing process function DecodeBin(), specified in subclause 9.3.3.2, is invoked to decode the contents of all VCL NAL units of a coded picture. When entropy_coding_mode_flag is equal to 1, BinCountsInNALunits shall not exceed $(32 \div 3) * \text{NumBytesInVclNALunits} + (\text{RawMbbits} * \text{PicSizeInMbs}) \div 32$.

NOTE – The constraint on the maximum number of bins resulting from decoding the contents of the slice layer NAL units can be met by inserting a number of cabac_zero_word syntax elements to increase the value of NumBytesInVclNALunits. Each cabac_zero_word is represented in a NAL unit by the three-byte sequence 0x000003 (as a result of the constraints on NAL unit contents that result in requiring inclusion of an emulation_prevention_three_byte for each cabac_zero_word).

7.4.2.8 RBSP trailing bits semantics

rbstop_one_bit shall be equal to 1.

rbstop_alignment_zero_bit shall be equal to 0.

7.4.3 Slice header semantics

When present, the value of the slice header syntax elements pic_parameter_set_id, frame_num, field_pic_flag, bottom_field_flag, idr_pic_id, pic_order_cnt_lsb, delta_pic_order_cnt[0], delta_pic_order_cnt[1], and slice_group_change_cycle shall be the same in all slice headers of a coded picture.

~~first_tb_in_slice specifies the address of the first treeblock in the slice.~~

~~The first treeblock address of the slice is derived as follows:~~

~~TBD~~

~~entropylightweight_slice_flag equal to 1 specifies the slice is an entropy slice. The entropy slice denotes that the entropy decoding process shall use an alternative definition of neighbor availability than the reconstruction process whereas entropy_slice_flag equal to 0 denotes that the entropy decoding and reconstruction processes shall use the same definition of neighbor availability. [Ed.: (WJ) needs to be clarified more] equal to 1 specifies that the value of slice header syntax elements not present shall be inferred to be equal to the value of slice header syntax elements in a proceeding slice, where a proceeding slice is defined as the slice containing treeblock with location (LCUAddressfirst_tb_in_slice – 1). lightweight_slice_flag shall be equal to 0 when first_tb_in_sliceLCUAddress equal to 0. [Ed.: (WJ) do we need to code lightweight_slice_flag when first_tb_in_slice is equal to 0?]~~

~~slice_type~~ specifies the coding type of the slice according to ~~Table 7-3~~Table 7-3.

Table 7-37-3 – Name association to slice_type

slice_type	Name of slice_type
0	P (P slice)
1	B (B slice)
2	I (I slice)

When nal_unit_type is equal to 5 (IDR picture), slice_type shall be equal to 2.

When max_num_ref_frames is equal to 0, slice_type shall be equal to 2.

pic_parameter_set_id specifies the picture parameter set in use. The value of pic_parameter_set_id shall be in the range of 0 to 255, inclusive.

frame_num is used as an identifier for pictures and shall be represented by log2_max_frame_num_minus4 + 4 bits in the bitstream. frame_num is constrained as follows:

The variable PrevRefFrameNum is derived as follows.

- If the current picture is an IDR picture, PrevRefFrameNum is set equal to 0.
- Otherwise (the current picture is not an IDR picture), PrevRefFrameNum is set as follows.
 - If the decoding process for gaps in frame_num was invoked by the decoding process for an access unit that contained a non-reference picture that followed the previous access unit in decoding order that contained a reference picture, PrevRefFrameNum is set equal to the value of frame_num for the last of the "non-existing" reference frames inferred by the decoding process for gaps in frame_num.
 - Otherwise, PrevRefFrameNum is set equal to the value of frame_num for the previous access unit in decoding order that contained a reference picture.

The value of frame_num is constrained as follows.

- If the current picture is an IDR picture, frame_num shall be equal to 0.
- Otherwise (the current picture is not an IDR picture), referring to the primary coded picture in the previous access unit in decoding order that contains a reference picture as the preceding reference picture, the value of frame_num for the current picture shall not be equal to PrevRefFrameNum unless both of the following conditions are true.
 - the current picture and the preceding reference picture belong to consecutive access units in decoding order
 - one or more of the following conditions is true
 - the preceding reference picture is an IDR picture
 - the preceding reference picture includes a memory_management_control_operation syntax element equal to 5
NOTE 1 – When the preceding reference picture includes a memory_management_control_operation syntax element equal to 5, PrevRefFrameNum is equal to 0.
 - there is a primary coded picture that precedes the preceding reference picture and the primary coded picture that precedes the preceding reference picture does not have frame_num equal to PrevRefFrameNum
 - there is a primary coded picture that precedes the preceding reference picture and the primary coded picture that precedes the preceding reference picture is not a reference picture

When the value of frame_num is not equal to PrevRefFrameNum, the following applies.

- There shall not be any previous frame in decoding order that is currently marked as "used for short-term reference" that has a value of frame_num equal to any value taken on by the variable UnusedShortTermFrameNum in the following:

```
UnusedShortTermFrameNum = ( PrevRefFrameNum + 1 ) % MaxFrameNum
while( UnusedShortTermFrameNum != frame_num )
    UnusedShortTermFrameNum = ( UnusedShortTermFrameNum + 1 ) % MaxFrameNum
```

- The value of frame_num is constrained as follows.
 - If gaps_in_frame_num_value_allowed_flag is equal to 0, the value of frame_num for the current picture shall be equal to (PrevRefFrameNum + 1) % MaxFrameNum.
 - Otherwise (gaps_in_frame_num_value_allowed_flag is equal to 1), the following applies.
 - If frame_num is greater than PrevRefFrameNum, there shall not be any non-reference pictures in the bitstream that follow the previous reference picture and precede the current picture in decoding order in which either of the following conditions is true.
 - The value of frame_num for the non-reference picture is less than PrevRefFrameNum.
 - The value of frame_num for the non-reference picture is greater than the value of frame_num for the current picture.
 - Otherwise (frame_num is less than PrevRefFrameNum), there shall not be any non-reference pictures in the bitstream that follow the previous reference picture and precede the current picture in decoding order in which both of the following conditions are true.
 - The value of frame_num for the non-reference picture is less than PrevRefFrameNum.
 - The value of frame_num for the non-reference picture is greater than the value of frame_num for the current picture.

HEVC

A picture including a memory_management_control_operation equal to 5 shall have **frame_num** constraints as described above and, after the decoding of the current picture and the processing of the memory management control operations, the picture shall be inferred to have had **frame_num** equal to 0 for all subsequent use in the decoding process.

idr_pic_id identifies an IDR picture. The values of **idr_pic_id** in all the slices of an IDR picture shall remain unchanged. When two consecutive access units in decoding order are both IDR access units, the value of **idr_pic_id** in the slices of the first such IDR access unit shall differ from the **idr_pic_id** in the second such IDR access unit. The value of **idr_pic_id** shall be in the range of 0 to 65535, inclusive.

pic_order_cnt_lsb specifies the picture order count modulo MaxPicOrderCntLsb for the top field of a coded **frame** or for a coded field. The length of the **pic_order_cnt_lsb** syntax element is $\log_2 \text{max_pic_order_cnt_lsb_minus1} + 4$ bits. The value of the **pic_order_cnt_lsb** shall be in the range of 0 to MaxPicOrderCntLsb - 1, inclusive.

num_ref_idx_active_override_flag equal to 1 specifies that the syntax element **num_ref_idx_l0_active_minus1** is present for P and B slices and that the syntax element **num_ref_idx_l1_active_minus1** is present for B slices. **num_ref_idx_active_override_flag** equal to 0 specifies that the syntax elements **num_ref_idx_l0_active_minus1** and **num_ref_idx_l1_active_minus1** are not present.

When the current slice is a P or B slice and **field_pic_flag** is equal to 0 and the value of **num_ref_idx_l0_default_active_minus1** in the picture parameter set exceeds 15, **num_ref_idx_active_override_flag** shall be equal to 1.

When the current slice is a B slice and **field_pic_flag** is equal to 0 and the value of **num_ref_idx_l1_default_active_minus1** in the picture parameter set exceeds 15, **num_ref_idx_active_override_flag** shall be equal to 1.

num_ref_idx_l0_active_minus1 specifies the maximum reference index for reference picture list 0 that shall be used to decode the slice.

When the current slice is a P or B slice and **num_ref_idx_l0_active_minus1** is not present, **num_ref_idx_l0_active_minus1** shall be inferred to be equal to **num_ref_idx_l0_default_active_minus1**.

The range of **num_ref_idx_l0_active_minus1** is specified as follows.

- If **field_pic_flag** is equal to 0, **num_ref_idx_l0_active_minus1** shall be in the range of 0 to 15, inclusive. When **MbaffFrameFlag** is equal to 1, **num_ref_idx_l0_active_minus1** is the maximum index value for the decoding of **frame** macroblocks and $2 * \text{num_ref_idx_l0_active_minus1} + 1$ is the maximum index value for the decoding of field macroblocks.
- Otherwise (**field_pic_flag** is equal to 1), **num_ref_idx_l0_active_minus1** shall be in the range of 0 to 31, inclusive.

num_ref_idx_l1_active_minus1 specifies the maximum reference index for reference picture list 1 that shall be used to decode the slice.

When the current slice is a B slice and **num_ref_idx_l1_active_minus1** is not present, **num_ref_idx_l1_active_minus1** shall be inferred to be equal to **num_ref_idx_l1_default_active_minus1**.

The range of **num_ref_idx_l1_active_minus1** is constrained as specified in the semantics for **num_ref_idx_l0_active_minus1** with l0 and list 0 replaced by l1 and list 1, respectively.

cabac_init_idc specifies the index for determining the initialisation table used in the initialisation process for context variables. The value of **cabac_init_idc** shall be in the range of 0 to 2, inclusive.

first_slice_in_pic_flag indicates whether the slice is the first slice of the picture. If **first_slice_in_pic_flag** is equal to 1, the variables **SliceAddress** and **LCUAddress** are both set to 0 and the decoding starts with the first LCU in the picture.

slice_address specifies the address in slice granularity resolution in which the slice starts and shall be represented by $\lceil \log_2(\text{NumLCUsInPicture}) \rceil + \text{SliceGranularity}$ bits in the bitstream where **NumLCUsInPicture** is the number of LCUs in a picture.

The variable **LCUAddress** is set to $(\text{slice_address} \gg \text{SliceGranularity})$ and represents the LCU part of the slice address in raster scan order. The variable **GranularityAddress** is set to $(\text{slice_address} - (\text{LCUAddress} \ll \text{SliceGranularity}))$ and represents the sub-LCU part of the slice address expressed in z-scan order.

The variable **SliceAddress** is then set to $(\text{LCUAddress} \ll (\log_2 \text{diff_max_min_coding_block_size} \ll 1)) + (\text{GranularityAddress} \ll ((\log_2 \text{diff_max_min_coding_block_size} \ll 1) - \text{SliceGranularity}))$ and the slice decoding starts with the largest coding unit possible at the slice starting coordinate.

slice_qp_delta specifies the initial value of **QP_Y** to be used for all the macroblocks in the slice until modified by the value of **cu_qp_delta** in the coding unit layer. The initial **QP_Y** quantisation parameter for the slice is computed as

$$\text{SliceQP}_Y = 26 + \text{pic_init_qp_minus26} + \text{slice_qp_delta} \quad (7-12429)$$

Formatted: Font: Bold

Formatted: Font: Bold

HEVC

The value of slice_qp_delta shall be limited such that SliceQP_Y is in the range of −QpBdOffset_Y to +51, inclusive.

collocated_from_10_flag equal to 1 specifies the picture that contains the co-located partition shall be derived from list 0, otherwise the picture shall be derived from list 1.

7.4.3.1 Reference picture list modification semantics

The syntax elements **modification_of_pic_nums_idc**, **abs_diff_pic_num_minus1**, and **long_term_pic_num** specify the change from the initial reference picture lists to the reference picture lists to be used for decoding the slice.

ref_pic_list_modification_flag_l0 equal to 1 specifies that the syntax element **modification_of_pic_nums_idc** is present for specifying reference picture list 0. **ref_pic_list_modification_flag_l0** equal to 0 specifies that this syntax element is not present.

When **ref_pic_list_modification_flag_l0** is equal to 1, the number of times that **modification_of_pic_nums_idc** is not equal to 3 following **ref_pic_list_modification_flag_l0** shall not exceed **num_ref_idx_l0_active_minus1** + 1.

When **RefPicList0[num_ref_idx_l0_active_minus1]** in the initial reference picture list produced as specified in subclause 8.2.2.2 is equal to "no reference picture", **ref_pic_list_modification_flag_l0** shall be equal to 1 and **modification_of_pic_nums_idc** shall not be equal to 3 until **RefPicList0[num_ref_idx_l0_active_minus1]** in the modified list produced as specified in subclause 8.2.2.3 is not equal to "no reference picture".

ref_pic_list_modification_flag_l1 equal to 1 specifies that the syntax element **modification_of_pic_nums_idc** is present for specifying reference picture list 1. **ref_pic_list_modification_flag_l1** equal to 0 specifies that this syntax element is not present.

When **ref_pic_list_modification_flag_l1** is equal to 1, the number of times that **modification_of_pic_nums_idc** is not equal to 3 following **ref_pic_list_modification_flag_l1** shall not exceed **num_ref_idx_l1_active_minus1** + 1.

When decoding a slice with **slice_type** equal to 1 or 6 and **RefPicList1[num_ref_idx_l1_active_minus1]** in the initial reference picture list produced as specified in subclause 8.2.2.2 is equal to "no reference picture", **ref_pic_list_modification_flag_l1** shall be equal to 1 and **modification_of_pic_nums_idc** shall not be equal to 3 until **RefPicList1[num_ref_idx_l1_active_minus1]** in the modified list produced as specified in subclause 8.2.2.3 is not equal to "no reference picture".

modification_of_pic_nums_idc together with **abs_diff_pic_num_minus1** or **long_term_pic_num** specifies which of the reference pictures are re-mapped. The values of **modification_of_pic_nums_idc** are specified in Table 7-4Table 7-4. The value of the first **modification_of_pic_nums_idc** that follows immediately after **ref_pic_list_modification_flag_l0** or **ref_pic_list_modification_flag_l1** shall not be equal to 3.

Table 7-4Table 7-4 – modification_of_pic_nums_idc operations for modification of reference picture lists

modification_of_pic_nums_idc	modification specified
0	abs_diff_pic_num_minus1 is present and corresponds to a difference to subtract from a picture number prediction value
1	abs_diff_pic_num_minus1 is present and corresponds to a difference to add to a picture number prediction value
2	long_term_pic_num is present and specifies the long-term picture number for a reference picture
3	End loop for modification of the initial reference picture list

abs_diff_pic_num_minus1 plus 1 specifies the absolute difference between the picture number of the picture being moved to the current index in the list and the picture number prediction value. **abs_diff_pic_num_minus1** shall be in the range of 0 to **MaxPicNum** − 1. The allowed values of **abs_diff_pic_num_minus1** are further restricted as specified in subclause 8.2.2.3.1.

[Ed. (TW): clarify the following paragraph]

long_term_pic_num specifies the long-term picture number of the picture being moved to the current index in the list. When decoding a coded frame, **long_term_pic_num** shall be equal to a **LongTermPicNum** assigned to one of the reference frames or complementary reference field pairs marked as "used for long-term reference". When decoding a coded field, **long_term_pic_num** shall be equal to a **LongTermPicNum** assigned to one of the reference fields marked as "used for long-term reference".

7.4.3.2 Reference picture lists combination semantics

ref_pic_list_combination_flag equal to 1 indicates that the reference picture list 0 and the reference picture list 1 are combined to be an additional reference picture lists combination used for the prediction units being uni-directional predicted. This flag equal to 0 indicates that the reference picture list 0 and reference picture list 1 are identical thus reference picture list 0 is used as the reference picture lists combination. The reference picture lists combination is set to be empty at the start of the loop defined in this table.

num_ref_idx_lc_active_minus1+1 specifies the number of reference pictures selected from reference picture list 0 or reference picture list 1 in the reference picture lists combination.

ref_pic_list_modification_flag_lc equal to 1 specifies that the syntax element **pic_from_list_0_flag** and **ref_idx_list_curr** are present for specifying the mapping for the entries of the reference picture lists combination to the entries of reference picture list 0 and reference picture list 1.

ref_pic_list_modification_flag_lc equal to 0 specifies that these syntax elements are not present. The reference picture lists combination is initialized as specified in subclause X.X.X.X.

pic_from_list_0_flag indicates the current reference picture added into the reference picture lists combination is from reference picture list 0 or reference picture list 1. When this flag is equal to 1, the picture is from the reference picture list 0, and the **CurrRefPicList** is reference picture list 0; when this flag is equal to 0, the picture is from the reference picture list 1, and the **CurrRefPicList** is reference picture list 1;

ref_idx_list_curr indicates the reference index of the picture in the **CurrRefPicList** to be appended at the end of the reference picture lists combination.

7.4.3.3 Decoded reference picture marking semantics

[Ed. (TW): clarify the following paragraphs wrt **frame/field/picture**]

The syntax elements **no_output_of_prior_pics_flag**, **long_term_reference_flag**, **adaptive_ref_pic_marking_mode_flag**, **memory_management_control_operation**, **difference_of_pic_nums_minus1**, **long_term_frame_idx**, **long_term_pic_num**, and **max_long_term_frame_idx_plus1** specify marking of the reference pictures.

The marking of a reference picture can be "unused for reference", "used for short-term reference", or "used for long-term reference", but only one among these three. When a reference picture is referred to as being marked as "used for reference", this collectively refers to the picture being marked as "used for short-term reference" or "used for long-term reference" (but not both). A reference picture that is marked as "used for short-term reference" is referred to as a short-term reference picture. A reference picture that is marked as "used for long-term reference" is referred to as a long-term reference picture.

The content of the decoded reference picture marking syntax structure shall be the same in all slice headers of the primary coded picture.

The syntax category of the decoded reference picture marking syntax structure shall be inferred as follows.

- If the decoded reference picture marking syntax structure is in a slice header, the syntax category of the decoded reference picture marking syntax structure is inferred to be equal to 2.
- Otherwise (the decoded reference picture marking syntax structure is in a decoded reference picture marking repetition SEI message as specified in Annex D), the syntax category of the decoded reference picture marking syntax structure is inferred to be equal to 5.

no_output_of_prior_pics_flag specifies how the previously-decoded pictures in the decoded picture buffer are treated after decoding of an IDR picture. When the IDR picture is the first IDR picture in the bitstream, the value of **no_output_of_prior_pics_flag** has no effect on the decoding process. When the IDR picture is not the first IDR picture in the bitstream and the value of **PicWidthInMbs**, **FrameHeightInMbs**, or **max_dec_frame_buffering** derived from the active sequence parameter set is different from the value of **PicWidthInMbs**, **FrameHeightInMbs**, or **max_dec_frame_buffering** derived from the sequence parameter set active for the preceding picture, **no_output_of_prior_pics_flag** equal to 1 may (but should not) be inferred by the decoder, regardless of the actual value of **no_output_of_prior_pics_flag**.

long_term_reference_flag equal to 0 specifies that the **MaxLongTermFrameIdx** variable is set equal to "no long-term picture indices" and that the IDR picture is marked as "used for short-term reference". **long_term_reference_flag** equal to 1 specifies that the **MaxLongTermFrameIdx** variable is set equal to 0 and that the current IDR picture is marked "used for long-term reference" and is assigned **LongTermFrameIdx** equal to 0. When **max_num_ref_frames** is equal to 0, **long_term_reference_flag** shall be equal to 0.

HEVC

adaptive_ref_pic_marking_mode_flag selects the reference picture marking mode of the currently decoded picture as specified in [Table 7-5](#)~~Table 7-5~~. **adaptive_ref_pic_marking_mode_flag** shall be equal to 1 when the number of pictures that are currently marked as "used for long-term reference" is equal to $\text{Max}(\text{max_num_ref_frames}, 1)$.

Table 7-5~~7-5~~ – Interpretation of **adaptive_ref_pic_marking_mode_flag**

adaptive_ref_pic_marking_mode_flag	Reference picture marking mode specified
0	Sliding window reference picture marking mode: A marking mode providing a first-in first-out mechanism for short-term reference pictures.
1	Adaptive reference picture marking mode: A reference picture marking mode providing syntax elements to specify marking of reference pictures as "unused for reference" and to assign long-term frame indices.

memory_management_control_operation specifies a control operation to be applied to affect the reference picture marking. The **memory_management_control_operation** syntax element is followed by data necessary for the operation specified by the value of **memory_management_control_operation**. The values and control operations associated with **memory_management_control_operation** are specified in [Table 7-6](#)~~Table 7-6~~. The **memory_management_control_operation** syntax elements are processed by the decoding process in the order in which they appear in the slice header, and the semantics constraints expressed for each **memory_management_control_operation** apply at the specific position in that order at which that individual **memory_management_control_operation** is processed.

memory_management_control_operation shall not be equal to 1 in a slice header unless the specified reference picture is marked as "used for short-term reference" when the **memory_management_control_operation** is processed by the decoding process.

memory_management_control_operation shall not be equal to 2 in a slice header unless the specified long-term picture number refers to a reference picture that is marked as "used for long-term reference" when the **memory_management_control_operation** is processed by the decoding process.

memory_management_control_operation shall not be equal to 3 in a slice header unless the specified reference picture is marked as "used for short-term reference" when the **memory_management_control_operation** is processed by the decoding process.

memory_management_control_operation shall not be equal to 3 or 6 if the value of the variable **MaxLongTermFrameIdx** is equal to "no long-term picture indices" when the **memory_management_control_operation** is processed by the decoding process.

Not more than one **memory_management_control_operation** equal to 4 shall be present in a slice header.

Not more than one **memory_management_control_operation** equal to 5 shall be present in a slice header.

Not more than one **memory_management_control_operation** equal to 6 shall be present in a slice header.

memory_management_control_operation shall not be equal to 5 in a slice header unless no **memory_management_control_operation** in the range of 1 to 3 is present in the same decoded reference picture marking syntax structure.

A **memory_management_control_operation** equal to 5 shall not follow a **memory_management_control_operation** equal to 6 in the same slice header.

When a **memory_management_control_operation** equal to 6 is present, any **memory_management_control_operation** equal to 2, 3, or 4 that follows the **memory_management_control_operation** equal to 6 within the same slice header shall not specify the current picture to be marked as "unused for reference".

NOTE 2 – These constraints prohibit any combination of multiple **memory_management_control_operation** syntax elements that would specify the current picture to be marked as "unused for reference". However, some other combinations of **memory_management_control_operation** syntax elements are permitted that may affect the marking status of other reference pictures more than once in the same slice header. In particular, it is permitted for a **memory_management_control_operation** equal to 3 that specifies a long-term **frame** index to be assigned to a particular short-term reference picture to be followed in the same slice header by a **memory_management_control_operation** equal to 2, 3, 4 or 6 that specifies the same reference picture to subsequently be marked as "unused for reference".

Table 7-67-6 – Memory management control operation (memory_management_control_operation) values

memory_management_control_operation	Memory Management Control Operation
0	End memory_management_control_operation syntax element loop
1	Mark a short-term reference picture as "unused for reference"
2	Mark a long-term reference picture as "unused for reference"
3	Mark a short-term reference picture as "used for long-term reference" and assign a long-term frame index to it
4	Specify the maximum long-term frame index and mark all long-term reference pictures having long-term frame indices greater than the maximum value as "unused for reference"
5	Mark all reference pictures as "unused for reference" and set the MaxLongTermFrameIdx variable to "no long-term frame indices"
6	Mark the current picture as "used for long-term reference" and assign a long-term frame index to it

difference_of_pic_nums_minus1 is used (with memory_management_control_operation equal to 3 or 1) to assign a long-term frame index to a short-term reference picture or to mark a short-term reference picture as "unused for reference". When the associated memory_management_control_operation is processed by the decoding process, the resulting picture number derived from difference_of_pic_nums_minus1 shall be a picture number assigned to one of the reference pictures marked as "used for reference" and not previously assigned to a long-term frame index.

The resulting picture number shall be one of the set of picture numbers assigned to reference pictures.

long_term_pic_num is used (with memory_management_control_operation equal to 2) to mark a long-term reference picture as "unused for reference". When the associated memory_management_control_operation is processed by the decoding process, long_term_pic_num shall be equal to a long-term picture number assigned to one of the reference pictures that is currently marked as "used for long-term reference".

The resulting long-term picture number shall be one of the set of long-term picture numbers assigned to reference pictures.

long_term_frame_idx is used (with memory_management_control_operation equal to 3 or 6) to assign a long-term picture index to a picture. When the associated memory_management_control_operation is processed by the decoding process, the value of long_term_frame_idx shall be in the range of 0 to MaxLongTermFrameIdx, inclusive.

max_long_term_frame_idx_plus1 minus 1 specifies the maximum value of long-term picture index allowed for long-term reference pictures (until receipt of another value of max_long_term_frame_idx_plus1). The value of max_long_term_frame_idx_plus1 shall be in the range of 0 to max_num_ref_frames, inclusive.

7.4.3.4 Sample adaptive offset parameter semantics

sample_adaptive_offset_flag specifies whether sample adaptive offset applies or not for the current slice.

sao_split_flag[saoDepth][x0][y0] specifies whether a region is split into four sub regions with half horizontal and vertical number of LCU. When sao_split_flag[saoDepth][x0][y0] is not present, it shall be inferred to be equal to 0.

The maximum allowed depth for sample adaptive offset process SaoMaxDepth is derived as follows:

$$\text{SaoMaxDepth} = \text{Min}(4, \text{Min}(\text{Floor}(\text{Log2}(\text{PicWidthInLCUs})), \text{Floor}(\text{Log2}(\text{PicHeightInLCUs}))))$$

[Ed.: (WJ) PicWidthInLCUs and PicHeightInLCUs should be defined elsewhere. Note: SAO assumes that $\text{PicWidthInLCUs} = \text{Round}(\text{PicWidthInSamples}_L \div (1 \ll \text{Log2MaxCUsSize}))$

sao_type_idx[saoDepth][x0][y0] indicates the offset type for the region specified by saoDepth, x0 and y0.

sao_offset[saoDepth][x0][y0][i] indicates the offset value of i-th category for the region specified by saoDepth, x0 and y0.

[Ed.: (WJ) x0 and y0 are not sample position here, but indices from 0 to 3 for 4-split sub region. Maybe better to use sample position for the consistency to other parts of the text]

The number of categories, NumSaoClass, is specified in Table 7-7.

Table 7-7 – Specification of NumSaoClass

sao_type_idx[saoDepth][x0][y0]	NumSaoCategory	Edge type (informative)
0	0	Not applied
1	4	1D 0-degree edge
2	4	1D 90-degree edge
3	4	1D 135-degree edge
4	4	1D 45-degree edge
5	16	Central band
6	16	Side band

7.4.3.5 Adaptive loop filter parameter semantics

adaptive_loop_filter_flag specifies whether adaptive loop filter applies or not for the current slice.

alf_region_adaptation_flag specifies the filter adaptation method shall be applied for the current slice. If alf_region_adaptation_flag is equal to 1, the region-based filter adaptation shall be applied, otherwise, the block-based directional-activity filter adaptation shall be applied.

alf_length_luma_minus5_div2 specifies the filter length in horizontal direction for the luma component alfTap used in the adaptive loop filter process as specified by

$$\text{alfTap} = (\text{alf_length_luma_minus5_div2} < 1) + 5 \tag{7-141}$$

The number of coded luma filter coefficients AlfCodedLengthLuma and the number of luma filter coefficients AlfLengthLuma are derived as follows:

- If alfTap is equal to 9, [Ed.: (WJ) truncated diamond shape]
$$\text{AlfCodedLengthLuma} = ((\text{alfTap} * \text{alfTap}) >> 2) + 1 \tag{7-151}$$
$$\text{AlfLengthLuma} = ((\text{alfTap} * \text{alfTap}) >> 1) \tag{7-161}$$
- Otherwise (alfTap is less than 9), [Ed.: (WJ) diamond shape]
$$\text{AlfCodedLengthLuma} = ((\text{alfTap} * \text{alfTap}) >> 2) + 2 \tag{7-171}$$
$$\text{AlfLengthLuma} = ((\text{alfTap} * \text{alfTap}) >> 1) + 2 \tag{7-181}$$

alf_no_filters_minus1 plus 1 specifies the number of filter sets for the current slice.

alf_start_second_filter specifies the variance index of luma samples where the second filter is applied, when alf_no_filters_minus1 is equal to 1.

alf_filter_pattern[i] specifies the filter index array corresponding to i-th variance index of luma samples, when alf_no_filters_minus1 is greater than 1. The number of filter sets AlfNumFilters is derived as follows:

- If alf_no_filters_minus1 is less than 2,
$$\text{AlfNumFilters} = \text{alf_no_filters_minus1} + 1 \tag{7-191}$$
- Otherwise (alf_no_filters_minus1 is greater than 2)
$$\text{AlfNumFilters} = \sum_i \text{alf_filter_pattern}[i] \text{ with } i = 0..15 \tag{7-201}$$

alf_pred_method specifies whether the filter coefficients are coded in a predictive way.

alf_min_kstart_minus1 plus 1 specifies the minimum order k of k-th order exponential golomb code for the luma filter coefficients for the adaptive loop filter.

alf_golomb_index_bit specifies the difference in order k of k-th order exponential golomb code for the different groups of the luma filter coefficients. Note that there are several groups of the luma filter coefficients where each group may have different order k.

alf_coeff_luma[i][j] specifies the j-th filter coefficient of i-th filter for the adaptive loop filtering process for luma samples.

alf_chroma_idc specifies which chroma components are to be filtered.

Table 7-87-87-8 – Specification of alf_chroma_idc

alf_chroma_idc	chroma component to be filtered
0	None
1	Cr
2	Cb
3	Cb and Cr

alf_length_chroma_minus5_div2 specifies the filter length in horizontal direction for the luma component alfTapC used in the adaptive loop filter process as specified by

$$\text{alfTapC} = (\text{alf_length_chroma_minus5_div2} \ll 1) + 5 \tag{7-212+17}$$

The number of coded chroma filter coefficients AlfCodedLengthChroma and the number of chroma filter coefficients AlfLengthChroma are derived as follows:

$$\text{AlfCodedLengthChroma} = ((\text{alfTapC} * \text{alfTapC} - 1) \gg 1) + 2 \tag{7-222+18}$$

$$\text{AlfLengthChroma} = (\text{alfTapC} * \text{alfTapC}) + 1 \tag{7-232+19}$$

alf_coeff_chroma[i] specifies the i-th filter coefficient for the adaptive loop filtering process for chroma samples.

7.4.3.6 Adaptive loop filter coding unit control parameter semantics

alf_cu_control_flag specifies whether the adaptive loop filter process for luma component shall be applied adaptively according to the coding unit. If alf_cu_control_flag is equal to 1, the filtering process shall be applied only when alf_cu_flag is equal to 1, otherwise, the filtering process shall be applied to all luma samples in the current slice.

alf_cu_control_max_depth specifies the maximum split depth from treeblock for transmitting the flag indicating the application of the adaptive loop filter process.

alf_length_cu_control_info specifies the information of the number of alf_cu_flag succeeding this information. ~~alf_length_cu_control_info shall present unless alf_cu_control_max_depth is 0, otherwise, it shall be inferred to be equal to 0.~~ When ~~The the~~ variable specifying the number of alf_cu_flag shall be computed as

$$\text{NumAlfCuFlag} = \text{alf_length_cu_control_info} + \text{NumTBsInPicture} \tag{7-242+20}$$

~~[Ed.: (WJ) NumTBsInPicture should be dependent on multiple slice structure]~~

alf_cu_flag[i] specifies the information whether a coding unit is filtered when the adaptive loop filter is applied.

7.4.4 Slice data semantics

end_of_slice_flag equal to 0 specifies that another macroblock is following in the slice. end_of_slice_flag equal to 1 specifies the end of the slice and that no further macroblock follows.

7.4.5 Coding tree semantics

split_coding_unit_flag[x0][y0] specifies whether a coding unit is split into coding units with half horizontal and vertical size. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered coding block relative to the top-left luma sample of the picture.

When `split_coding_unit_flag[ x0 ][ y0 ]` is not present, the following applies:

- If `log2CUsSize` is greater than `Log2MinCUsSize`, the value of `split_coding_unit_flag[ x0 ][ y0 ]` is inferred to be equal to 1.
- Otherwise (`log2CUsSize` is equal to `Log2MinCUsSize`), the value of `split_coding_unit_flag[ x0 ][ y0 ]` is inferred to be equal to 0.

`cu_split_pred_part_mode[ x0 ][ y0 ]` specifies `split_coding_unit_flag` and when the coding unit is not split the `skip_flag[ x0 ][ y0 ]`, `PredMode` and `PartMode` of a coding unit. The array indices `x0` and `y0` specify the location (`x0`, `y0`) of the top-left luma sample of the coding unit relative to the top-left luma sample of the picture.

Table 7-97-97-9 – Specification of `cu_split_pred_part_mode` when `log2CUsSize` is greater than `Log2MinCUsSize`

<code>cu_split_pred_part_mode</code>	<code>split_coding_unit_flag</code>	<code>merge_flag</code>	<code>PredMode</code>	<code>PartMode</code>
0	1	-	-	-
1	0	-	MODE_SKIP	PART_2Nx2N
2	0	1	MODE_INTER	PART_2Nx2N
3	0	0	MODE_INTER	PART_2Nx2N
4	0	-	MODE_INTER	PART_2NxN
5	0	-	MODE_INTER	PART_Nx2N
6	0	-	MODE_INTRA	PART_2Nx2N

Table 7-107-107-10 – Specification of `cu_split_pred_part_mode` when `log2CUsSize` is equal to `Log2MinCUsSize`

<code>cu_split_pred_part_mode</code>	<code>split_coding_unit_flag</code>	<code>merge_flag</code>	<code>PredMode</code>	<code>PartMode</code>
0	0	-	MODE_SKIP	PART_2Nx2N
1	0	1	MODE_INTER	PART_2Nx2N
2	0	0	MODE_INTER	PART_2Nx2N
3	0	-	MODE_INTER	PART_2NxN
4	0	-	MODE_INTER	PART_Nx2N
5 (escape symbol)	0	-	MODE_INTRA	PART_2Nx2N
			MODE_INTRA	PART_NxN
			MODE_INTER	PARN_NxN

7.4.6 Coding unit semantics

`skip_flag[ x0 ][ y0 ]` equal to 1 specifies that for the current coding unit, when decoding a P or B slice, no more syntax elements except the motion vector predictor indices are parsed after `skip_flag[ x0 ][ y0 ]`. `skip_flag[ x0 ][ y0 ]` equal to 0 specifies that the coding unit is not skipped. The array indices `x0`, `y0` specify the location (`x0`, `y0`) of the top-left luma sample of the considered coding block relative to the top-left luma sample of the picture.

When `skip_flag[ x0 ][ y0 ]` is not present, it shall be inferred to be equal to 0.

HEVC

intra_part_mode specifies whether the PartMode for the current coding unit is PART_2Nx2N or PART_NxN, when the slice type is I and log2CUsSize is equal to Log2MinCUsSize. If intra_part_mode is equal to 1, the PartMode is PART_2Nx2N. Otherwise if intra_part_mode is equal to 0, the PartMode is PART_NxN.

pred_type specifies prediction mode and partitioning type of the current coding unit. The semantics of pred_type depend on the slice type. The variables PredMode, PartMode and IntraSplitFlag are derived from the value of pred_type as defined in Table 7-11Table 7-8. The value of pred_type shall not be equal to 3 or 5 when slice_type is equal to P or B and log2CUsSize is greater than Log2MinCUsSize.

When pred_type is not present, the variables PredMode and PartMode are derived as follows.

- If slice_type is equal to I and log2CUsSize is greater than Log2MinCUsSize,
 - PredMode is inferred to be equal to MODE_INTRA
 - PartMode is inferred to be equal to PART_2Nx2N
 - IntraSplitFlag is inferred to be equal to 0
- Otherwise (slice_type is equal to P or B), if skip_flag[x0][y0] is equal to 1,
 - PredMode is inferred to be equal to MODE_SKIP
 - PartMode is inferred to be equal to PART_2Nx2N

pcm_flag specifies whether the associated coding unit with PART_2Nx2N is coded by I PCM: If the pcm_flag is equal to 1, the associated coding unit with PART_2Nx2N is coded by I PCM. When the pcm_flag is not present, it shall be inferred to be equal to 0.

pcm_alignment_zero_bit is a bit equal to 0.

pcm_sample_luma[i] represents a coded luma sample value in the raster scan within the coding unit. The number of bits used to represent each of these samples is PCMBitDepth_l.

- **pcm_sample_chroma[i]** represents a coded chroma sample value in the raster scan within the coding unit. The first half of the values represent coded Cb samples and the remaining half of the values represent coded Cr samples. The number of bits used to represent each of these samples is PCMBitDepth_c.

Table 7-117-117-11 - Name association to prediction mode and partitioning type

slice_type	pred_type	IntraSplitFlag	PredMode	PartMode
I	0	0	MODE_INTRA	PART_2Nx2N
	1	1	MODE_INTRA	PART_NxN
P or B	0	-	MODE_INTER	PART_2Nx2N
	1	-	MODE_INTER	PART_2NxN
	2	-	MODE_INTER	PART_Nx2N
	3	-	MODE_INTER	PART_NxN
	4	0	MODE_INTRA	PART_2Nx2N
	5	1	MODE_INTRA	PART_NxN
	inferred	-	MODE_SKIP	PART_2Nx2N

7.4.7 Prediction unit semantics

mvp_idx_l0[x0][y0] specifies the motion vector predictor index of list 0 where x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

When mvp_idx_l0[x0][y0] is not present, it shall be inferred to be equal to 0.

mvp_idx_l1[x0][y0] has the same semantics as mvp_idx_l0, with l0 and list 0 replaced by l1 and list 1, respectively.

mvp_idx_lc[x0][y0] has the same semantics as mvp_idx_l0, with l0 and list 0 replaced by lc and list combination, respectively.

prev_intra_luma_pred_flag[x0][y0], **mpm_idx[x0][y0]** and **rem_intra_luma_pred_mode[x0][y0]** specify the intra prediction mode for luma samples. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture. When

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Subscript

Formatted: Font: Bold

Formatted: No bullets or numbering, Tab stops: Not at 0.2"

Formatted: Subscript

prev_intra_luma_pred_flag[x0][y0] is equal to 1, the intra prediction mode is inferred from a neighbouring intra-predicted prediction unit according to subclause 8.3.1.8.3.1.

When mpm_idx[x0][y0] is not present, it shall be inferred to have a value of 0.

The variable IntraLumaModeBins specifies the number of bins indicating the rem_intra_luma_pred_mode[x0][y0]. IntraLumaModeBins depends on the size of the prediction unit and limits the number of available prediction modes as given by Table 7-12Table 7-11.

Table 7-127-12 – Number of bins and number of mode for rem_intra_luma_pred_mode associated to PuSize

PuSize	IntraLumaModeBins	Number of Modes
Pu_2x2	1	3
PU_4x4	4	17
PU_8x8	5	34
PU_16x16	5	34
PU_32x32	5	34
PU_64x64	1	3
PU_128x128	2	5

planar_flag_luma[x0][y0] specifies whether the luma block shall be derived by the planar prediction when IntraPredMode[x0][y0] is equal to 2. If planar_flag_luma[x0][y0] is not present, planar_flag_luma[x0][y0] shall be inferred to be equal to 0.

intra_chroma_pred_mode[x0][y0] specifies the intra prediction mode for chromas samples. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

planar_flag_chroma[x0][y0] specifies whether the chroma block shall be derived by the planar prediction when IntraPredModeC is equal to 2.

If planar_flag_chroma[x0][y0] is not present (SignaledAsChromaDC is not equal to 1 or IntraPredMode[x0][y0] is equal to Intra_DC or IntraPredMode[x0][y0] is equal to Intra_Planar), planar_flag_chroma[x0][y0] shall be inferred as follows:

- If SignaledAsChromaDC is not equal to 1, planar_flag_chroma[x0][y0] shall be inferred to be equal to 0.
- Otherwise, if IntraPredMode[x0][y0] is equal to Intra_DC or Intra_Planar, the following applies.
 - If chroma_pred_from_luma_enabled_flag is equal to 1, the following applies.
 - If intra_chroma_pred_mode[x0][y0] is equal to 3, planar_flag_chroma[x0][y0] is set equal to 1. [Ed. (WJ): possible conflict with codeword switch]
 - Otherwise (intra_chroma_pred_mode[x0][y0] is equal to 4), planar_flag_chroma[x0][y0] is set equal to planar_flag_luma[x0][y0].
 - Otherwise (chroma_pred_from_luma_enabled_flag is equal to 0), the following applies.
 - If intra_chroma_pred_mode[x0][y0] is equal to 2, planar_flag_chroma[x0][y0] is set equal to 1. [Ed. (WJ): possible conflict with codeword switch]
 - Otherwise (intra_chroma_pred_mode[x0][y0] is equal to 3), planar_flag_chroma[x0][y0] is set equal to planar_flag_luma[x0][y0].

[Ed. (WJ): suggested to be noted from proponents – under the specific value of intra_chroma_pred_mode, the planar_flag_chroma may be inferred based on planar_flag_luma. The binarization of intra_chroma_pred_mode should take account of this property and the codeword switching as listed in the open issue]

HEVC

merge_flag[x0][y0] specifies whether the inter prediction parameters for the current prediction unit are inferred from a neighbouring inter-predicted partition. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

When **merge_flag**[x0][y0] is not present (InferredMergeFlag is equal to 1), it is inferred to be equal to 1.

merge_idx[x0][y0] specifies the merging candidate index of the merging candidate list where x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

When **merge_idx**[x0][y0] is not present, it is inferred to be equal to 0.

combined_inter_pred_ref_idx specifies the values of **inter_pred_flag** and **ref_idx_1X** with X being 0, 1 or c. When it is not present, it shall be inferred to be equal to 0. [Ed. (WJ): needs to be improved]

The variables NumPredRefLC, NumPredRefL0 and NumPredRefL1 are specified as

NumPredRefLC = Min(4, num_ref_idx_lc_active_minus1 + 1) (7-252518)
NumPredRefL0 = Min(2, num_ref_idx_l0_active_minus1 + 1) (7-262618)
NumPredRefL1 = Min(2, num_ref_idx_l1_active_minus1 + 1) (7-272718)

The variable MaxPredRef is specified as

– If num_ref_idx_lc_active_minus1 is greater than 0, the following applies.

MaxPredRef = NumPredRefLC + NumPredRefL0 * NumPredRefL1 (7-282818)

– Otherwise (combined list is not used), the following applies.

MaxPredRef = NumPredRefL0 + NumPredRefL0 * NumPredRefL1 (7-292918)

The function use_combined_inter_pred_ref(x, y) is specified as follows: [Ed. (WJ): move to syntax function section?]

use_combined_inter_pred_ref(x, y) = check_inter_pred_ref_neighbour(x-1, y) &&
check_inter_pred_ref_neighbour(x, y-1) &&
check_inter_pred_ref_neighbour(x-1, y-1)

The function check_inter_pred_ref_neighbour(x, y) is specified as follows: [Ed. (WJ): move to syntax function section?]

if x or y is outside current slice, check_inter_pred_ref_neighbour(x, y) = true
else if (num_ref_idx_lc_active_minus1 <= 0 && ref_idx_l0[x][y] < 2 && ref_idx_l1[x][y] < 2)
check_inter_pred_ref_neighbour(x, y) = true
else if (num_ref_idx_lc_active_minus1 > 0 && inter_pred_flag[x][y] != PredLC &&
ref_idx_l0[x][y] < 2 && ref_idx_l1[x][y] < 2)
check_inter_pred_ref_neighbour(x, y) = true
else if (num_ref_idx_lc_active_minus1 > 0 && inter_pred_flag[x][y] == PredLC && ref_idx_lc[x][y] < 4)
check_inter_pred_ref_neighbour(x, y) = true
else
check_inter_pred_ref_neighbour(x, y) = false

inter_pred_flag[x0][y0] specifies whether uni-prediction, or bi-prediction is used for the current prediction unit according to Table 7-13. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

Table 7-13 – Name association to inter prediction mode

slice_type	inter_pred_flag	Name of inter_pred_flag
P	inferred	Pred L0

HEVC

Formatted: Font: Bold

Formatted: Normal, Indent: Left: 0", Tab stops: 0.2", Left + Not at 0.59" + 0.79" + 0.98"

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Normal, Indent: Left: 0", Tab stops: 0.3", Left + Not at 0.59" + 0.79" + 0.98"

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Tab stops: 0.3", Left

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

Formatted: Normal, Indent: Left: 0", Tab stops: 0.3", Left + Not at 0.59" + 0.79" + 0.98"

B	0	Pred_LC
	1	Pred_BI

When entropy_coding_mode_flag is equal to 1 and inter_pred_flag[x0][y0] is not present, it shall be inferred to be equal to Pred_L0 when slice_type is equal to P and Pred_BI when slice_type is equal to B.

When entropy_coding_mode_flag is equal to 0, inter_pred_flag[x0][y0] is not present and combined_inter_pred_ref_idx is present, it shall be inferred as follows:

- If num_ref_idx_lc_active_minus1 is greater than 0 and combined_inter_pred_ref_idx < NumPredRefLC,
inter_pred_flag[x0][y0] is set equal to Pred_LC.
- Otherwise, if num_ref_idx_lc_active_minus1 is equal to 0 and combined_inter_pred_ref_idx < NumPredRefLC,
inter_pred_flag[x0][y0] is set equal to Pred_L0.
- Otherwise, inter_pred_flag[x0][y0] is set equal to Pred_BI.

ref_idx_l0[x0][y0] specifies the list 0 reference picture index for the current prediction unit. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture.

When ref_idx_l0[x0][y0] is not present and combined_inter_pred_ref_idx is present, ref_idx_l0[x0][y0] shall be inferred to be equal to ((combined_inter_pred_ref_idx – NumPredRefLC) / NumPredRefL1).

ref_idx_l0_minusX[x0][y0] + X specifies the value of ref_idx_l0[x0][y0] when combined_inter_pred_ref_idx is present and it is equal to MaxPredRef.

The constant X is derived as follows:

- If inter_pred_flag[x0][y0] is Pred_L0, X is set equal to 2.
- Otherwise, X is set equal to 0.

ref_idx_l1[x0][y0] has the same semantics as ref_idx_l0, with l0 and list 0 replaced by l1 and list 1, respectively.

When ref_idx_l1[x0][y0] is not present and combined_inter_pred_ref_idx is present, ref_idx_l1[x0][y0] shall be inferred to be equal to ((combined_inter_pred_ref_idx – NumPredRefLC) % NumPredRefL1).

ref_idx_l1_minusX[x0][y0] + X specifies the value of ref_idx_l1[x0][y0] when combined_inter_pred_ref_idx is present and it is equal to MaxPredRef.

The constant X is derived as follows:

- If ref_idx_l0[x0][y0] is less than 2, X is set equal to 2.
- Otherwise, X is set equal to 0.

ref_idx_lc[x0][y0] has the same semantics as ref_idx_l0, with l0 and list 0 replaced by lc and list combination, respectively.

When ref_idx_lc[x0][y0] is not present and combined_inter_pred_ref_idx is present, ref_idx_lc[x0][y0] shall be inferred to be equal to combined_inter_pred_ref_idx.

ref_idx_lc_minus4[x0][y0] + 4 specifies the value of ref_idx_lc[x0][y0] when combined_inter_pred_ref_idx is present and it is equal to MaxPredRef.

mvd_l0[x0][y0][compIdx], specifies the difference between a list 0 vector component to be used and its prediction. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered prediction block relative to the top-left luma sample of the picture. The horizontal motion vector component difference is assigned compIdx = 0 and the vertical motion vector component is assigned compIdx = 1.

When any of the two components is not present, the inferred value is 0.

mvd_l1[x0][y0][compIdx] has the same semantics as mvd_l0, with l0 and list 0 replaced by l1 and list 1, respectively.

Formatted: Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.27" + Indent at: 0.27"

Formatted: Font:

Formatted: Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.27" + Indent at: 0.27"

Formatted: English (United Kingdom)

Formatted: Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.27" + Indent at: 0.27"

Formatted: Font: English (United Kingdom)

Formatted: Font: Bold

Formatted: English (United States)

HEVC

mvd_lc[x0][y0][compIdx] has the same semantics as **mvd_l0**, with l0 and list 0 replaced by lc and list combination, respectively.

7.4.8 Transform tree semantics

no_residual_data_flag equal to 1 specifies that no residual data are present for the current coding unit. **no_residual_data_flag** equal to 0 specifies that residual data are present for the current coding unit.

When **no_residual_data_flag** is not present, its value shall be inferred to be equal to 0.

split_transform_flag[x0][y0][trafoDepth] specifies whether a block is split into blocks with half horizontal and vertical size for the purpose of transform coding. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered block relative to the top-left luma sample of the picture. The array index trafoDepth specifies the current subdivision level of a coding unit into blocks for the purpose of transform coding. trafoDepth is equal to 0 for blocks that correspond to coding units.

When **split_transform_flag**[x0][y0][trafoDepth] is not present, it is inferred as follows:

- If **log2TrafoSize** is greater than **Log2MaxTrafoSize** or **intraSplitFlag** is equal to 1, the value of **split_transform_flag**[x0][y0][trafoDepth] is inferred to be equal to 1.
- Otherwise (**log2TrafoSize** is less than or equal to **Log2MaxTrafoSize** and **intraSplitFlag** is equal to 0), the value of **split_transform_flag**[x0][y0][trafoDepth] is inferred to be equal to 0.

cbf_luma[x0][y0][trafoDepth] equal to 1 specifies that the luma transform block contains one or more transform coefficient levels not equal to 0. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered transform block relative to the top-left luma sample of the picture. The array index trafoDepth specifies the current subdivision level of a coding unit into blocks for the purpose of transform coding. trafoDepth is equal to 0 for blocks that correspond to coding units.

When **cbf_luma**[x0][y0][trafoDepth] is not present, it is inferred to be equal to 1.

cbf_cb[x0][y0][trafoDepth] equal to 1 specifies that the Cb transform block contains one or more transform coefficient levels not equal to 0. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered transform block relative to the top-left luma sample of the picture. The array index trafoDepth specifies the current subdivision level of a coding unit into blocks for the purpose of transform coding. trafoDepth is equal to 0 for blocks that correspond to coding units.

When **cbf_cb**[x0][y0][trafoDepth] is not present and **PredMode** is not equal to **MODE_INTRA**, the value of **cbf_cb**[x0][y0][trafoDepth] is inferred to be equal to 0.

cbf_cr[x0][y0][trafoDepth] equal to 1 specifies that the Cr transform block contains one or more transform coefficient levels not equal to 0. The array indices x0, y0 specify the location (x0, y0) of the top-left luma sample of the considered transform block relative to the top-left luma sample of the picture. The array index trafoDepth specifies the current subdivision level of a coding unit into blocks for the purpose of transform coding. trafoDepth is equal to 0 for blocks that correspond to coding units.

When **cbf_cr**[x0][y0][trafoDepth] is not present and **PredMode** is not equal to **MODE_INTRA**, the value of **cbf_cr**[x0][y0][trafoDepth] is inferred to be equal to 0.

cbp_and_split_transform contains a number of coded block flags and/or a **split_transform_flag**. Depending on a 4-bit value **flagPattern** defined as follows, the value of **cbp_and_split_transform** is defined according to [Table 7-14Table 7-13](#).

```
codeLuma = trafoDepth == 0 || cbf_luma[ xB ][ yB ][ trafoDepth - 1 ]
codeCb = trafoDepth == 0 || (cbf_cb[ xB ][ yB ][ trafoDepth - 1 ] &&
log2TrafoSize > Log2MinTrafoSize )
codeCr = trafoDepth == 0 || (cbf_cr[ xB ][ yB ][ trafoDepth - 1 ] &&
log2TrafoSize > Log2MinTrafoSize )
codeSplitTrans = log2TrafoSize <= Log2MaxTrafoSize &&
log2TrafoSize > Log2MinTrafoSize &&
trafoDepth < maxDepth &&
!intraSplitFlag
flagPattern = (codeLuma << 3) + (codeCb << 2) + (codeCr << 1) + codeSplitTrans
```

The values of **codeLuma**, **codeCb**, **codeCr** and **codeSplitTrans** specify respectively if an associated flag of **cbf_luma**, **cbf_cb**, **cbf_cr**, and **split_transform_flag** is included in the syntax element **cbp_and_split_transform**.

In [Table 7-14Table 7-13](#), Luma, Cb, Cr and Split denote the values of **cbf_luma**[x0][y0][trafoDepth], **cbf_cb**[x0][y0][trafoDepth], **cbf_cr**[x0][y0][trafoDepth] and **split_transform_flag**[x0][y0][trafoDepth]

HEVC

respectively. Luma1, Luma2 and Luma3 denote respectively the values of $\text{cbf_luma}[x1][y0][\text{trafoDepth}]$, $\text{cbf_luma}[x0][y1][\text{trafoDepth}]$ and $\text{cbf_luma}[x1][y1][\text{trafoDepth}]$. The values of $x1$ and $y1$ are derived as

$$x1 = x0 + ((1 \ll \log2\text{TrafoSize}) \gg 1) \quad (7-313424)$$

$$y1 = y0 + ((1 \ll \log2\text{TrafoSize}) \gg 1) \quad (7-323224)$$

Table 7-147-147-14 – Specification of **cbp_and_split_transform**

flagPattern	cbp_and_split_transform
8	$(\text{Luma} \ll 3) + (\text{Luma1} \ll 2) + (\text{Luma2} \ll 1) + \text{Luma3} - 1$
9	$(\text{Luma} \ll 1) + \text{Split}$
10	$(\text{Luma} \ll 1) + \text{Cr}$
11	$(\text{Luma} \ll 2) + (\text{Cr} \ll 1) + \text{Split}$
12	$(\text{Luma} \ll 1) + \text{Cb}$
13	$(\text{Luma} \ll 2) + (\text{Cb} \ll 1) + \text{Split}$
14	$(\text{Luma} \ll 2) + (\text{Cb} \ll 1) + \text{Cr}$
15	$(\text{Luma} \ll 2) + ((\text{Cb} \text{Cr}) \ll 1) + \text{Split}$

7.4.9 Transform coefficient semantics

The transform coefficient levels are parsed into the arrays $\text{transCoeffLevel}[x0][y0][\text{trafoDepth}][\text{cldx}][n]$. The array indices $x0, y0$ specify the location $(x0, y0)$ of the top-left luma sample of the considered transform block relative to the top-left luma sample of the picture. The array index trafoDepth specifies the current subdivision level of a coding unit into blocks for the purpose of transform coding. trafoDepth is equal to 0 for blocks that correspond to coding units. The array index cldx specifies an indicator for the colour component; it is equal to 0 for luma, equal to 1 for Cb, and equal to 2 for Cr. The array index n specifies the scanning position of the transform coefficient levels.

cu_qp_delta can change the value of QP_Y for a quantization group of coding units where the quantization group of coding units is specified as follows:

- If a coding unit with the $\text{split_coding_unit_flag}[x0][y0]$ equal to 0 and the $\log2\text{CUSize}$ is greater than or equal to $\log2\text{MinCUDQPSize}$, the quantization group includes this coding unit only.
- Otherwise, if a coding unit with the $\text{split_coding_unit_flag}[x0][y0]$ equal to 1 and the $\log2\text{CUSize}$ is equal to $\log2\text{MinCUDQPSize}$, the quantization group includes all coding units split from this coding unit.

The decoded value of **cu_qp_delta** shall be in the range of $-(26 + \text{QpBdOffset}_Y / 2)$ to $+(25 + \text{QpBdOffset}_Y / 2)$, inclusive. **cu_qp_delta** shall be inferred to be equal to 0 when it is not present for any quantization group of coding units.

The value of QP_Y is derived as

$$\text{QP}_Y = (((\text{QP}_{Y,\text{PREV}} + \text{cu_qp_delta} + 52 + 2 * \text{QpBdOffset}_Y) \% (52 + \text{QpBdOffset}_Y)) - \text{QpBdOffset}_Y) \quad (7-333324)$$

where $\text{QP}_{Y,\text{PREV}}$ is the luma quantization parameter, QP_Y , of the left neighbor quantization group of coding units in the current slice. If the left neighbor quantization group in the current slice is not available, $\text{QP}_{Y,\text{PREV}}$ is the luma quantization parameter, of the previous quantization group in decoding order in the current slice. For the first quantization group of coding units in the slice $\text{QP}_{Y,\text{PREV}}$ is initially set equal to SliceQP_Y at the start of each slice.

The value of QP'_Y is derived as

$$\text{QP}'_Y = \text{QP}_Y + \text{QpBdOffset}_Y \quad (7-343422)$$

When **PredMode** is equal to **MODE_INTRA**, different scanning orders are used. The arrays specifying the scanning order are derived as follows.

- The array $\text{ScanType}[\log2\text{TrafoSize}][\text{IntraPredMode}]$, specifying the scanning order for various transform block sizes and luma intra prediction modes, is derived as specified in Table 7-15Table 7-12.

Formatted: Indent: Left: 0", Hanging: 0.3", Tab stops: 0.3", Left + Not at 0.28"

HEVC

Table 7-157-157-15 – Specification of ScanType[log2TrafoSize–2][IntraPredMode]

IntraPredMode	log2TrafoSize			
	2	3	4	5
0	1	1	0	0
1	2	2	0	0
2-3	0	0	0	0
4-5	1	1	0	0
6	0	0	0	0
7-8	2	2	0	0
9-10	0	0	0	0
11-12	1	1	0	0
13-14	0	0	0	0
15-16	2	2	0	0
17-19	0	0	0	0
20-23	1	1	0	0
24-27	0	0	0	0
28-31	2	2	0	0
32-33	0	0	0	0
34	0	0	0	0
35	n/a0	n/a0	n/a0	n/a0

The array ScanTypeC[log2TrafoSize–2][IntraPredModeC], specifying the scanning order for various transform block sizes and chroma intra prediction modes, is set equal to derived as follows, specified in Table 7-13. The scanning order for IntraPredModeC equal to 4 is set equal to the corresponding luma scanning order ScanType[log2TrafoSize–2][IntraPredMode].

If IntraPredModeC is less than 4, ScanTypeC[log2TrafoSize][IntraPredModeC] is set equal to ScanType[log2TrafoSize + 1][IntraPredModeC].

Otherwise (IntraPredModeC is equal to 4), ScanTypeC[log2TrafoSize][IntraPredModeC] is set equal to ScanType[log2TrafoSize + 1][IntraPredMode].

[Ed. (WJ): the index log2TrafoSize + 1 is valid only for 4:2:0 chroma sampling]

Formatted: Indent: Left: 0", Hanging: 0.3", Tab stops: 0.3", Left + Not at 0.28"

Formatted: No bullets or numbering, Tab stops: 0.59", Left + Not at 0.28"

Table 7-167-167-16 – Specification of ScanTypeC[log2TrafoSize–2][IntraPredModeC]

IntraPredModeC	log2TrafoSize			
	2	3	4	5
0	1	0	0	0
1	2	0	0	0
2-3	0	0	0	0
4	ScanType[log2TrafoSize–2][IntraPredMode]			

7.4.10 Residual coding CABAC semantics

The array ScanOrder[log2BlockSize–2][scanIdx][pos][comp] specifies the mapping of the scan position pos, ranging from 0 to ((1 << log2BlockSize) * (1 << log2BlockSize))–1, to horizontal and vertical components of the scan-order matrix. The array index scanIdx equal to 0 specifies a zig-zag scan, scanIdx equal to 1 specifies a horizontal scan and scanIdx equal to 2 specifies a vertical scan. The array index comp equal to 0 specifies the horizontal component and the array index comp equal to 1 specifies the vertical component. The array ScanOrder is derived as follows.

HEVC

The scanning order array initialisation process as specified in 6.5 is invoked with $1 \ll \log_2 \text{TrafoSize} - 2$ as input and the output is assigned to `ScanOrder[  $\log_2 \text{TrafoSize} - 2$  ]`.

last_significant_coeff_x, **last_significant_coeff_y** specify the column and the row position of the last significant coefficient in scanning order within a transform block. The values of **last_significant_coeff_x** and **last_significant_coeff_y** are ranging from 0 to $(1 \ll \log_2 \text{TrafoSize}) - 1$.

When `scanIdx` is equal to 2, the coordinates are swapped as follows.

```
temp = last_significant_coeff_x
last_significant_coeff_x = last_significant_coeff_y
last_significant_coeff_y = temp
```

significant_coeff_flag[xC][yC] specifies for the transform coefficient position (xC, yC) within the current transform block whether the corresponding transform coefficient level at location (xC, yC) is non-zero as follows.

- If **significant_coeff_flag[xC][yC]** is equal to 0, the transform coefficient level at location (xC, yC) is set equal to 0;
- Otherwise (**significant_coeff_flag[xC][yC]** is equal to 1), the transform coefficient level at location (xC, yC) has a non-zero value.

The **significant_coeff_flag[last_significant_coeff_x][last_significant_coeff_y]** at the last significant location (**last_significant_coeff_x**, **last_significant_coeff_y**) in scan order is inferred to be equal to 1.

When **significant_coeff_flag[xC][yC]** is not present, it is inferred to be equal to 0.

coeff_abs_level_greater1_flag[n] specifies for the scanning position n whether there are transform coefficient levels greater than 1.

When **coeff_abs_level_greater1_flag[n]** is not present, it is inferred to be equal to 0.

coeff_abs_level_greater2_flag[n] specifies for the scanning position n whether there are transform coefficient levels greater than 2.

When **coeff_abs_level_greater2_flag[n]** is not present, it is inferred to be equal to 0.

coeff_abs_level_minus3[n] is the absolute value of a transform coefficient level minus 3 at the scanning position n. The value of **coeff_abs_level_minus3** is constrained by the limits in subclause XX.

When **coeff_abs_level_minus3[n]** is not present, it is inferred as follows.

- If **coeff_abs_level_greater1_flag[n]** is equal to 0, **coeff_abs_level_minus3[n]** is inferred to be equal to -2.
- Otherwise (**coeff_abs_level_greater1_flag[n]** is equal to 1), **coeff_abs_level_minus3[n]** is inferred to be equal to -1.

coeff_sign_flag[n] specifies the sign of a transform coefficient level for the scanning position n as follows.

- If **coeff_sign_flag[n]** is equal to 0, the corresponding transform coefficient level has a positive value.
- Otherwise (**coeff_sign_flag[n]** is equal to 1), the corresponding transform coefficient level has a negative value.

When **coeff_sign_flag[n]** is not present, it is inferred to be equal to 0.

7.4.11 Residual coding CAVLC semantics

The following CAVLC syntax elements are used to decode a block of nMax transform coefficients.

last_pos_level_one specifies the position of the last non-zero valued transform coefficient in the scan and whether the absolute value of the transform coefficient is larger than 1.

- The position of the last non-zero transform coefficient in scan order is set equal to **last_pos_level_one** % nMax.
- If **last_pos_level_one** is less than nMax, the absolute value of the transform coefficient is equal to 1.
- Otherwise (**last_pos_level_one** is not less than nMax), the absolute value of the transform coefficient is larger than 1.

level_minus2_and_sign specifies the value of a transform coefficient that has an absolute value that is larger than one as follows.

- The absolute value of the transform coefficient is equal to $(\text{level_minus2_and_sign} \gg 1) + 2$.
- If $(\text{level_minus2_and_sign} \& 1)$ is equal to 0, the transform coefficient has a positive value.

HEVC

- Otherwise ((level_minus2_and_sign & 1) is equal to 1), the transform coefficient has a negative value.

sign_flag specifies the sign of a non-zero valued transform coefficient as follows.

- If sign_flag is equal to 0, the transform coefficient has a positive value.
- Otherwise (sign_flag is equal to 1), the transform coefficient has a negative value.

run_level_one specifies the number of consecutive transform coefficients in the scan with zero value before a non-zero valued transform coefficients and whether the absolute value of the non-zero valued transform coefficient is larger than 1.

- Given the scan position *n* of the current non-zero valued transform coefficient, the number of consecutive transform coefficients with zero value before the next non-zero valued transform coefficient is set equal to run_level_one%n.
- If run_level_one is less than *n*, the absolute value of the transform coefficient is equal to 1.
- Otherwise (run_level_one is not less than *n*), the absolute value of the next non-zero valued transform coefficient is larger than 1.

level specifies the absolute value of a non-zero valued transform coefficient.

8 Decoding process

Outputs of this process are decoded samples of the current picture (sometimes referred to by the variable CurrPic).

Depending on the value of chroma_format_idc, the number of sample arrays of the current picture is as follows.

- If chroma_format_idc is equal to 0, the current picture consists of 1 sample array *S_L*.
- Otherwise (chroma_format_idc is not equal to 0), the current picture consists of 3 sample arrays *S_L*, *S_{Cb}*, *S_{Cr}*.

This clause describes the decoding process, given syntax elements and upper-case variables from clause 6.67.

The decoding process is specified such that all decoders shall produce numerically identical results. Any decoding process that produces identical results to the process described here conforms to the decoding process requirements of this Recommendation | International Standard.

Each picture referred to in this clause is a complete primary coded picture or part of a primary coded picture. Each slice referred to in this clause is a slice of a primary coded picture. Each slice data partition referred to in this clause is a slice data partition of a primary coded picture.

Depending on the value of separate_colour_plane_flag, the decoding process is structured as follows.

- If separate_colour_plane_flag is equal to 0, the decoding process is invoked a single time with the current picture being the output.
- Otherwise (separate_colour_plane_flag is equal to 1), the decoding process is invoked three times. Inputs to the decoding process are all NAL units of the primary coded picture with identical value of colour_plane_id. The decoding process of NAL units with a particular value of colour_plane_id is specified as if only a coded video sequence with monochrome colour format with that particular value of colour_plane_id would be present in the bitstream. The output of each of the three decoding processes is assigned to the 3 sample arrays of the current picture with the NAL units with colour_plane_id equal to 0 being assigned to *S_L*, the NAL units with colour_plane_id equal to 1 being assigned to *S_{Cb}*, and the NAL units with colour_plane_id equal to 2 being assigned to *S_{Cr}*.

NOTE – The variable ChromaArrayType is derived as 0 when separate_colour_plane_flag is equal to 1 and chroma_format_idc is equal to 3. In the decoding process, the value of this variable is evaluated resulting in operations identical to that of monochrome pictures with chroma_format_idc being equal to 0.

An overview of the decoding process is given as follows:

1. The decoding of NAL units is specified in subclause 8.1.
2. The processes in subclause 8.2 specify decoding processes using syntax elements in the slice layer and above:
 - Variables and functions relating to picture order count are derived in subclause 8.2.1. (only needed to be invoked for one slice of a picture)
 - [Ed. (TW): clarify the following paragraph] When the frame_num of the current picture is not equal to PrevRefFrameNum and is not equal to (PrevRefFrameNum + 1) % MaxFrameNum, the decoding process for gaps in frame_num is performed according to subclause 8.2.3.2 prior to the decoding of any slices of the current picture.

HEVC

- At the beginning of the decoding process for each P, SP, or B slice, the decoding process for reference picture lists construction specified in subclause 8.2.2 is invoked for derivation of reference picture list 0 (RefPicList0), and when decoding a B slice, reference picture list 1 (RefPicList1).
 - When the current picture is a reference picture and after all slices of the current picture have been decoded, the decoded reference picture marking process in subclause 8.2.2.4 specifies how the current picture is used in the decoding process of inter prediction in later decoded pictures.
3. The processes in subclauses 8.3, **ABC** specify decoding processes using syntax elements in the treeblock layer and above.

[Ed. (TW): insert corresponding text]

8.1 NAL unit decoding process

Inputs to this process are NAL units.

Outputs of this process are the RBSP syntax structures encapsulated within the NAL units.

The decoding process for each NAL unit extracts the RBSP syntax structure from the NAL unit and then operates the decoding processes specified for the RBSP syntax structure in the NAL unit as follows.

Subclause 8.2 describes the decoding process for NAL units with nal_unit_type equal to 1 and 5.

NAL units with nal_unit_type equal to 7 and 8 contain sequence parameter sets and picture parameter sets, respectively. Picture parameter sets are used in the decoding processes of other NAL units as determined by reference to a picture parameter set within the slice headers of each picture. Sequence parameter sets are used in the decoding processes of other NAL units as determined by reference to a sequence parameter set within the picture parameter sets of each sequence.

8.2 Slice decoding process

8.2.1 Decoding process for picture order count

[Ed. (TW): clarify the following paragraphs]

8.2.1.1 Decoding process for picture order count type 0

8.2.1.2 Decoding process for picture order count type 1

8.2.1.3 Decoding process for picture order count type 2

8.2.2 Decoding process for reference picture lists construction

[Ed. (TW): clarify the following paragraphs]

This process is invoked at the beginning of the decoding process for each P, SP, or B slice.

Decoded reference pictures are marked as "used for short-term reference" or "used for long-term reference" as specified by the bitstream and specified in subclause 8.2.2.4. Short-term reference pictures are identified by the value of **frame_num**. Long-term reference pictures are assigned a long-term picture index as specified by the bitstream and specified in subclause 8.2.2.4.

Subclause 8.2.2.1 is invoked to specify

- the assignment of variables **FrameNum**, **FrameNumWrap**, and **PicNum** to each of the short-term reference pictures, and
- the assignment of variable **LongTermPicNum** to each of the long-term reference pictures.

Reference pictures are addressed through reference indices as specified in subclause **Error! Reference source not found.** A reference index is an index into a reference picture list. When decoding a P or SP slice, there is a single reference picture list RefPicList0. When decoding a B slice, there is a second independent reference picture list RefPicList1 in addition to RefPicList0.

At the beginning of the decoding process for each slice, reference picture list RefPicList0, and for B slices RefPicList1, are derived as specified by the following ordered steps:

1. An initial reference picture list RefPicList0 and for B slices RefPicList1 are derived as specified in subclause 8.2.2.2.

HEVC

2. When `ref_pic_list_modification_flag_l0` is equal to 1 or, when decoding a B slice, `ref_pic_list_modification_flag_l1` is equal to 1, the initial reference picture list `RefPicList0` and, for B slices, `RefPicList1` are modified as specified in subclause 8.2.2.3.

NOTE – The modification process for reference picture lists specified in subclause 8.2.2.3 allows the contents of `RefPicList0` and for B slices `RefPicList1` to be modified in a flexible fashion. In particular, it is possible for a picture that is currently marked "used for reference" to be inserted into `RefPicList0` and for B slices `RefPicList1` even when the picture is not in the initial reference picture list derived as specified in subclause 8.2.2.2.

The number of entries in the modified reference picture list `RefPicList0` is `num_ref_idx_l0_active_minus1 + 1`, and for B slices the number of entries in the modified reference picture list `RefPicList1` is `num_ref_idx_l1_active_minus1 + 1`. A reference picture may appear at more than one index in the modified reference picture lists `RefPicList0` or `RefPicList1`.

8.2.2.1 Decoding process for picture numbers

This process is invoked when the decoding process for reference picture lists construction specified in subclause 8.2.2, the decoded reference picture marking process specified in subclause 8.2.2.4, or the decoding process for gaps in `frame_num` specified in subclause 8.2.3.2 is invoked.

The variables `FrameNum`, `FrameNumWrap`, `PicNum`, `LongTermFrameIdx`, and `LongTermPicNum` are used for the initialisation process for reference picture lists in subclause 8.2.2.2, the modification process for reference picture lists in subclause 8.2.2.3, the decoded reference picture marking process in subclause 8.2.2.4, and the decoding process for gaps in `frame_num` in subclause 8.2.3.2.

To each short-term reference picture the variables `FrameNum` and `FrameNumWrap` are assigned as follows. First, `FrameNum` is set equal to the syntax element `frame_num` that has been decoded in the slice header(s) of the corresponding short-term reference picture. Then the variable `FrameNumWrap` is derived as

```
if( FrameNum > frame_num )
    FrameNumWrap = FrameNum - MaxFrameNum
else
    FrameNumWrap = FrameNum
```

(8-1)

where the value of `frame_num` used in Equation 8-18-4 is the `frame_num` in the slice header(s) for the current picture.

Each long-term reference picture has an associated value of `LongTermFrameIdx` (that was assigned to it as specified in subclause 8.2.2.4).

To each short-term reference picture a variable `PicNum` is assigned, and to each long-term reference picture a variable `LongTermPicNum` is assigned.

$$\text{PicNum} = \text{FrameNumWrap} \quad (8-2)$$

$$\text{LongTermPicNum} = \text{LongTermFrameIdx} \quad (8-3)$$

8.2.2.2 Initialisation process for reference picture lists

This initialisation process is invoked when decoding a P or B slice header.

`RefPicList0` and `RefPicList1` have initial entries as specified in subclauses 8.2.2.2.1 through 8.2.2.2.2.

When the number of entries in the initial `RefPicList0` or `RefPicList1` produced as specified in subclauses 8.2.2.2.1 through 8.2.2.2.2 is greater than `num_ref_idx_l0_active_minus1 + 1` or `num_ref_idx_l1_active_minus1 + 1`, respectively, the extra entries past position `num_ref_idx_l0_active_minus1` or `num_ref_idx_l1_active_minus1` are discarded from the initial reference picture list.

When the number of entries in the initial `RefPicList0` or `RefPicList1` produced as specified in subclauses 8.2.2.2.1 through 8.2.2.2.2 is less than `num_ref_idx_l0_active_minus1 + 1` or `num_ref_idx_l1_active_minus1 + 1`, respectively, the remaining entries in the initial reference picture list are set equal to "no reference picture".

8.2.2.2.1 Initialisation process for the reference picture list for P slices

This initialisation process is invoked when decoding a P slice in a coded picture.

When this process is invoked, there shall be at least one reference picture that is currently marked as "used for reference" (i.e., as "used for short-term reference" or "used for long-term reference") and is not marked as "non-existing". Pictures with higher values of `temporal_id` than the current picture cannot be used for reference, and are not included in the reference picture list.

Formatted: Heading 5

HEVC

The reference picture list RefPicList0 is ordered so that short-term reference pictures have lower indices than long-term reference pictures.

The short-term reference pictures are ordered starting with the picture with the highest PicNum value and proceeding through in descending order to the picture with the lowest PicNum value, excluding any picture with a temporal_id value higher than that of the current picture.

The long-term reference pictures are ordered starting with the picture with the lowest LongTermPicNum value and proceeding through in ascending order to the picture with the highest LongTermPicNum value, excluding any picture with a temporal_id value higher than that of the current picture.

For example, when three reference pictures are marked as "used for short-term reference" with PicNum equal to 300, 302, and 303 and two reference pictures are marked as "used for long-term reference" with LongTermPicNum equal to 0 and 3, the initial index order is:

- RefPicList0[0] is set equal to the short-term reference picture with PicNum = 303,
- RefPicList0[1] is set equal to the short-term reference picture with PicNum = 302,
- RefPicList0[2] is set equal to the short-term reference picture with PicNum = 300,
- RefPicList0[3] is set equal to the long-term reference picture with LongTermPicNum = 0,
- RefPicList0[4] is set equal to the long-term reference picture with LongTermPicNum = 3.

8.2.2.2.18.2.2.2 Initialisation process for reference picture lists for B slices

This initialisation process is invoked when decoding a B slice in a coded picture.

For purposes of the formation of the reference picture lists RefPicList0 and RefPicList1 the term reference entry refers in the following to decoded reference pictures.

When this process is invoked, there shall be at least one reference entry that is currently marked as "used for reference" (i.e., as "used for short-term reference" or "used for long-term reference") and is not marked as "non-existing". Pictures with higher values of temporal_id than the current picture cannot be used for reference, and are not included in either RefPicList0 or RefPicList1.

For B slices, the order of short-term reference entries in the reference picture lists RefPicList0 and RefPicList1 depends on output order, as given by PicOrderCnt(). When pic_order_cnt_type is equal to 0, reference pictures that are marked as "non-existing" as specified in subclause 8.2.3.2 are not included in either RefPicList0 or RefPicList1.

NOTE 1 – When gaps_in_frame_num_value_allowed_flag is equal to 1, encoders should use reference picture list modification to ensure proper operation of the decoding process (particularly when pic_order_cnt_type is equal to 0, in which case PicOrderCnt() is not inferred for "non-existing" pictures).

The reference picture list RefPicList0 is ordered such that short-term reference entries have lower indices than long-term reference entries. It is ordered as follows:

1. Let entryShortTerm be a variable ranging over all reference entries that are currently marked as "used for short-term reference" and which have a value of temporal_id equal to or lower than the temporal_id of the current picture. When some values of entryShortTerm are present having PicOrderCnt(entryShortTerm) less than PicOrderCnt(CurrPic), these values of entryShortTerm are placed at the beginning of refPicList0 in descending order of PicOrderCnt(entryShortTerm). All of the remaining values of entryShortTerm (when present) are then appended to refPicList0 in ascending order of PicOrderCnt(entryShortTerm).
2. The long-term reference entries which have a value of temporal_id equal to or lower than the temporal_id of the current picture are ordered starting with the long-term reference entry that has the lowest LongTermPicNum value and proceeding through in ascending order to the long-term reference entry that has the highest LongTermPicNum value.

The reference picture list RefPicList1 is ordered so that short-term reference entries have lower indices than long-term reference entries. It is ordered as follows:

1. Let entryShortTerm be a variable ranging over all reference entries that are currently marked as "used for short-term reference" and which have a value of temporal_id equal to or lower than the temporal_id of the current picture. When some values of entryShortTerm are present having PicOrderCnt(entryShortTerm) greater than PicOrderCnt(CurrPic), these values of entryShortTerm are placed at the beginning of refPicList1 in ascending order of PicOrderCnt(entryShortTerm). All of the remaining values of entryShortTerm (when present) are then appended to refPicList1 in descending order of PicOrderCnt(entryShortTerm).
2. Long-term reference entries which have a value of temporal_id equal to or lower than the temporal_id of the current picture are ordered starting with the long-term reference picture that has the lowest LongTermPicNum

HEVC

value and proceeding through in ascending order to the long-term reference entry that has the highest LongTermPicNum value.

3. When the reference picture list RefPicList1 has more than one entry and RefPicList1 is identical to the reference picture list RefPicList0, the first two entries RefPicList1[0] and RefPicList1[1] are switched.

8.2.2.3 Modification process for reference picture lists

After the invocation of this process, there shall be no reference pictures with greater temporal_id than the current slice included in the output RefPicList0 or RefPicList1.

When ref_pic_list_modification_flag_l0 is equal to 1, the following applies:

1. Let refIdxL0 be an index into the reference picture list RefPicList0. It is initially set equal to 0.
2. The corresponding syntax elements modification_of_pic_nums_idc are processed in the order they occur in the bitstream. For each of these syntax elements, the following applies.
 - If modification_of_pic_nums_idc is equal to 0 or equal to 1, the process specified in subclause 8.2.2.3.1 is invoked with refIdxL0 as input, and the output is assigned to refIdxL0.
 - Otherwise, if modification_of_pic_nums_idc is equal to 2, the process specified in subclause 8.2.2.3.2 is invoked with refIdxL0 as input, and the output is assigned to refIdxL0.
 - Otherwise (modification_of_pic_nums_idc is equal to 3), the modification process for reference picture list RefPicList0 is finished.

When the current slice is a B slice and ref_pic_list_modification_flag_l1 is equal to 1, the following applies:

1. Let refIdxL1 be an index into the reference picture list RefPicList1. It is initially set equal to 0.
2. The corresponding syntax elements modification_of_pic_nums_idc are processed in the order they occur in the bitstream. For each of these syntax elements, the following applies.
 - If modification_of_pic_nums_idc is equal to 0 or equal to 1, the process specified in subclause 8.2.2.3.1 is invoked with refIdxL1 as input, and the output is assigned to refIdxL1.
 - Otherwise, if modification_of_pic_nums_idc is equal to 2, the process specified in subclause 8.2.2.3.2 is invoked with refIdxL1 as input, and the output is assigned to refIdxL1.
 - Otherwise (modification_of_pic_nums_idc is equal to 3), the modification process for reference picture list RefPicList1 is finished.

8.2.2.3.1 Modification process of reference picture lists for short-term reference pictures

Input to this process is an index refIdxLX (with X being 0 or 1).

Output of this process is an incremented index refIdxLX.

The variable picNumLXNoWrap is derived as follows.

- If modification_of_pic_nums_idc is equal to 0,

$$\begin{aligned} &\text{if(picNumLXPred - (abs_diff_pic_num_minus1 + 1) < 0)} \\ &\quad \text{picNumLXNoWrap} = \text{picNumLXPred} - (\text{abs_diff_pic_num_minus1} + 1) + \text{MaxPicNum} \\ &\text{else} \\ &\quad \text{picNumLXNoWrap} = \text{picNumLXPred} - (\text{abs_diff_pic_num_minus1} + 1) \end{aligned} \quad (8-4)$$

- Otherwise (modification_of_pic_nums_idc is equal to 1),

$$\begin{aligned} &\text{if(picNumLXPred + (abs_diff_pic_num_minus1 + 1) \geq \text{MaxPicNum})} \\ &\quad \text{picNumLXNoWrap} = \text{picNumLXPred} + (\text{abs_diff_pic_num_minus1} + 1) - \text{MaxPicNum} \\ &\text{else} \\ &\quad \text{picNumLXNoWrap} = \text{picNumLXPred} + (\text{abs_diff_pic_num_minus1} + 1) \end{aligned} \quad (8-5)$$

picNumLXPred is the prediction value for the variable picNumLXNoWrap. When the process specified in this subclause is invoked the first time for a slice (that is, for the first occurrence of modification_of_pic_nums_idc equal to 0 or 1 in the ref_pic_list_modification() syntax), picNumL0Pred and picNumL1Pred are initially set equal to CurrPicNum. After each assignment of picNumLXNoWrap, the value of picNumLXNoWrap is assigned to picNumLXPred.

The variable picNumLX is derived as specified by the following pseudo-code:

HEVC

```

if( picNumLXNoWrap > CurrPicNum )
    picNumLX = picNumLXNoWrap - MaxPicNum
else
    picNumLX = picNumLXNoWrap

```

(8-6)

picNumLX shall be equal to the PicNum of a reference picture that is marked as "used for short-term reference" and shall not be equal to the PicNum of a short-term reference picture that is marked as "non-existing". The short-term reference picture with PicNum equal to picNumLX shall not have greater temporal_id than the current slice.

The following procedure is conducted to place the picture with short-term picture number picNumLX into the index position refldxLX, shift the position of any other remaining pictures to later in the list, and increment the value of refldxLX.

```

for( cldx = num_ref_idx_IX_active_minus1 + 1; cldx > refldxLX; cldx-- )
    RefPicListX[ cldx ] = RefPicListX[ cldx - 1 ]
RefPicListX[ refldxLX++ ] = short-term reference picture with PicNum equal to picNumLX
nldx = refldxLX
for( cldx = refldxLX; cldx <= num_ref_idx_IX_active_minus1 + 1; cldx++ )
    if( PicNumF( RefPicListX[ cldx ] ) != picNumLX )
        RefPicListX[ nldx++ ] = RefPicListX[ cldx ]

```

(8-7)

where the function PicNumF(RefPicListX[cldx]) is derived as follows.

- If the picture RefPicListX[cldx] is marked as "used for short-term reference", PicNumF(RefPicListX[cldx]) is the PicNum of the picture RefPicListX[cldx].
- Otherwise (the picture RefPicListX[cldx] is not marked as "used for short-term reference"), PicNumF(RefPicListX[cldx]) is equal to MaxPicNum.

NOTE 1 – A value of MaxPicNum can never be equal to picNumLX.

NOTE 2 – Within this pseudo-code procedure, the length of the list RefPicListX is temporarily made one element longer than the length needed for the final list. After the execution of this procedure, only elements 0 through num_ref_idx_IX_active_minus1 of the list need to be retained.

8.2.2.3.2 Modification process of reference picture lists for long-term reference pictures

Input to this process is an index refldxLX (with X being 0 or 1).

Output of this process is an incremented index refldxLX.

The following procedure is conducted to place the picture with long-term picture number long_term_pic_num into the index position refldxLX, shift the position of any other remaining pictures to later in the list, and increment the value of refldxLX.

```

for( cldx = num_ref_idx_IX_active_minus1 + 1; cldx > refldxLX; cldx-- )
    RefPicListX[ cldx ] = RefPicListX[ cldx - 1 ]
RefPicListX[ refldxLX++ ] = long-term reference picture with LongTermPicNum equal to long_term_pic_num
nldx = refldxLX
for( cldx = refldxLX; cldx <= num_ref_idx_IX_active_minus1 + 1; cldx++ )
    if( LongTermPicNumF( RefPicListX[ cldx ] ) != long_term_pic_num )
        RefPicListX[ nldx++ ] = RefPicListX[ cldx ]

```

(8-8)

where the long-term reference picture with LongTermPicNum equal to long_term_pic_num shall not have greater temporal_id than the current slice, and the function LongTermPicNumF(RefPicListX[cldx]) is derived as follows.

- If the picture RefPicListX[cldx] is marked as "used for long-term reference", LongTermPicNumF(RefPicListX[cldx]) is the LongTermPicNum of the picture RefPicListX[cldx].
- Otherwise (the picture RefPicListX[cldx] is not marked as "used for long-term reference"), LongTermPicNumF(RefPicListX[cldx]) is equal to 2 * (MaxLongTermFrameIdx + 1).

NOTE 1 – A value of 2 * (MaxLongTermFrameIdx + 1) can never be equal to long_term_pic_num.

NOTE 2 – Within this pseudo-code procedure, the length of the list RefPicListX is temporarily made one element longer than the length needed for the final list. After the execution of this procedure, only elements 0 through num_ref_idx_IX_active_minus1 of the list need to be retained.

8.2.2.4 Mapping process for reference picture lists combination in B slices

[Ed.: (WJ) needs to be checked once again. Try to find better way to represent]

This initialisation process is invoked when decoding a B slice header.

HEVC

Input to this process are the reference picture list RefPicListX and num_ref_idx_IX_active_minus1 with X being 0 or 1.

Outputs of this process are arrays PredLCToPredLx and RefIdxLCToRefIdxLx.

When the current slice is a B slice and ref_pic_list_modification_flag_lx is equal to 0, the following ordered steps apply:

1. Let refIdxL0 and refIdxL1 be indices into the reference picture lists RefPicListL0 and RefPicListL1. They are initially set equal to 0.
2. Let refIdxLC be an index into PredLCToPredLx and RefIdxLCToRefIdxLx. It is initially set equal to 0.
3. The following process is repeated until refIdxL0 and refIdxL1 are both greater than num_ref_idx_l0_active_minus1 and num_ref_idx_l1_active_minus1, respectively:

- If refIdxL0 is less than or equal to num_ref_idx_l0_active_minus1,
 - If the entry RefPicListL0[refIdxL0] is the first occurrence of the reference picture,

$$\begin{aligned} \text{PredLCToPredLx}[\text{refIdxLC}] &= \text{Pred_L0}, \\ \text{RefIdxLCToRefIdxLx}[\text{refIdxLC}++] &= \text{refIdxL0}. \end{aligned} \quad (8-9)$$

- refIdxL0++.
- If refIdxL1 is less than or equal to num_ref_idx_l1_active_minus1 and ref_pic_list_combination_flag equal to 1,
 - If the entry RefPicListL1[refIdxL1] is the first occurrence of the reference picture,

$$\begin{aligned} \text{PredLCToPredLx}[\text{refIdxLC}] &= \text{Pred_L1}, \\ \text{RefIdxLCToRefIdxLx}[\text{refIdxLC}++] &= \text{refIdxL1}. \end{aligned} \quad (8-10)$$

- refIdxL1++.

When the current slice is a B slice and ref_pic_list_modification_flag_lx is equal to 1, the following ordered steps apply:

1. Let refIdxLC be an index into the reference picture list PredLCToPredLx and RefIdxLCToRefIdxLx. It is initially set equal to 0.
2. The corresponding syntax elements pic_from_list_0_flag and ref_idx_list_curr are processed in the order they occur in the bitstream. For each of these syntax elements pairs, the following applies.

- If pic_from_list_0_flag is equal to 1,

$$\text{PredLCToPredLx}[\text{refIdxLC}] = \text{Pred_L0}, \quad (8-11)$$

- Otherwise,

$$\text{PredLCToPredLx}[\text{refIdxLC}] = \text{Pred_L1} \quad (8-12)$$

- RefIdxLCToRefIdxLx[refIdxLC++] = ref_idx_list_curr

When refIdxLC is greater than num_com_ref_list_active_minus1 + 1, the extra entries past position num_com_ref_list_active_minus1 are discarded from PredLCToPredLx and RefIdxLCToRefIdxLx.

When refIdxLC is less than num_com_ref_list_active_minus1 + 1, the remaining entries in PredLCToPredLx and RefIdxLCToRefIdxLx are set equal to Pred_L0 and 0, respectively.

8.2.3 Decoded reference picture marking process

This process is invoked for decoded pictures when nal_ref_idc is not equal to 0.

NOTE 1 – The decoding process for gaps in frame_num that is specified in subclause 8.2.3.2 may also be invoked when nal_ref_idc is equal to 0, as specified in clause 0.

A decoded picture with nal_ref_idc not equal to 0, referred to as a reference picture, is marked as "used for short-term reference" or "used for long-term reference". A picture that is marked as "used for short-term reference" is identified by its FrameNum. A picture that is marked as "used for long-term reference" is identified by its LongTermFrameIdx.

Pictures marked as "used for short-term reference" or as "used for long-term reference" can be used as a reference for inter prediction when decoding a picture until the picture is marked as "unused for reference".

HEVC

A picture can be marked as "unused for reference" by the sliding window reference picture marking process, a first-in, first-out mechanism specified in subclause 8.2.3.3 or by the adaptive memory control reference picture marking process, a customised adaptive marking operation specified in subclause 8.2.3.4.

A short-term reference picture is identified for use in the decoding process by its variables `FrameNum` and `FrameNumWrap` and its picture number `PicNum`, and a long-term reference picture is identified for use in the decoding process by its long-term picture number `LongTermPicNum`. When the current picture is not an IDR picture, subclause 8.2.2.1 is invoked to specify the assignment of the variables `FrameNum`, `FrameNumWrap`, `PicNum` and `LongTermPicNum`.

8.2.3.1 Sequence of operations for decoded reference picture marking process

Decoded reference picture marking proceeds in the following ordered steps:

4. All slices of the current picture are decoded.
5. Depending on whether the current picture is an IDR picture, the following applies.
 - If the current picture is an IDR picture, the following ordered steps are specified:
 - a. All reference pictures are marked as "unused for reference"
 - b. Depending on `long_term_reference_flag`, the following applies.
 - If `long_term_reference_flag` is equal to 0, the IDR picture is marked as "used for short-term reference" and `MaxLongTermFrameIdx` is set equal to "no long-term picture indices".
 - Otherwise (`long_term_reference_flag` is equal to 1), the IDR picture is marked as "used for long-term reference", the `LongTermFrameIdx` for the IDR picture is set equal to 0, and `MaxLongTermFrameIdx` is set equal to 0.
 - Otherwise (the current picture is not an IDR picture), the following applies.
 - If `adaptive_ref_pic_marking_mode_flag` is equal to 0, the process specified in subclause 8.2.3.3 is invoked.
 - Otherwise (`adaptive_ref_pic_marking_mode_flag` is equal to 1), the process specified in subclause 8.2.3.4 is invoked.
6. When the current picture is not an IDR picture and it was not marked as "used for long-term reference" by `memory_management_control_operation` equal to 6, it is marked as "used for short-term reference".

It is a requirement of bitstream conformance that, after marking the current decoded reference picture, the total number of pictures marked as "used for reference" shall not be greater than $\text{Max}(\text{max_num_ref_frames}, 1)$.

8.2.3.2 Decoding process for gaps in `frame_num`

[Ed. (TW): insert text]

8.2.3.3 Sliding window decoded reference picture marking process

This process is invoked when `adaptive_ref_pic_marking_mode_flag` is equal to 0.

Depending on the properties of the current picture as specified below, the following applies.

1. Let `numShortTerm` be the total number of reference pictures that are marked as "used for short-term reference". Let `numLongTerm` be the total number of reference pictures that are marked as "used for long-term reference".
2. When `numShortTerm + numLongTerm` is equal to $\text{Max}(\text{max_num_ref_frames}, 1)$, the condition that `numShortTerm` is greater than 0 shall be fulfilled, and the short-term reference picture that has the smallest value of `FrameNumWrap` is marked as "unused for reference".

8.2.3.4 Adaptive memory control decoded reference picture marking process

This process is invoked when `adaptive_ref_pic_marking_mode_flag` is equal to 1.

The `memory_management_control_operation` commands with values of 1 to 6 are processed in the order they occur in the bitstream after the current picture has been decoded. For each of these `memory_management_control_operation` commands, one of the processes specified in subclauses 8.2.3.4.1 to 8.2.3.4.6 is invoked depending on the value of

HEVC

memory_management_control_operation. The memory_management_control_operation command with value of 0 specifies the end of memory_management_control_operation commands.

8.2.3.4.1 Marking process of a short-term reference picture as "unused for reference"

This process is invoked when memory_management_control_operation is equal to 1.

Let picNumX be specified by

$$\text{picNumX} = \text{CurrPicNum} - (\text{difference_of_pic_nums_minus1} + 1). \quad (8-13)$$

The value of picNumX is used to mark the corresponding short-term reference picture as "unused for reference".

8.2.3.4.2 Marking process of a long-term reference picture as "unused for reference"

This process is invoked when memory_management_control_operation is equal to 2.

The value of LongTermPicNum is used to mark the corresponding long-term reference picture as "unused for reference".

8.2.3.4.3 Assignment process of a LongTermFrameIdx to a short-term reference picture

This process is invoked when memory_management_control_operation is equal to 3.

Given the syntax element difference_of_pic_nums_minus1, the variable picNumX is obtained as specified in subclause 8.2.3.4.1. picNumX shall refer to a picture marked as "used for short-term reference" and not marked as "non-existing".

When LongTermFrameIdx equal to long_term_frame_idx is already assigned to a long-term reference picture, that picture is marked as "unused for reference".

The value of LongTermFrameIdx is used to mark the corresponding picture from "used for short-term reference" to "used for long-term reference".

8.2.3.4.4 Decoding process for MaxLongTermFrameIdx

This process is invoked when memory_management_control_operation is equal to 4.

All pictures for which LongTermFrameIdx is greater than max_long_term_frame_idx_plus1 - 1 and that are marked as "used for long-term reference" are marked as "unused for reference".

The variable MaxLongTermFrameIdx is derived as follows.

- If max_long_term_frame_idx_plus1 is equal to 0, MaxLongTermFrameIdx is set equal to "no long-term picture indices".
- Otherwise (max_long_term_frame_idx_plus1 is greater than 0), MaxLongTermFrameIdx is set equal to max_long_term_frame_idx_plus1 - 1.

NOTE – The memory_management_control_operation command equal to 4 can be used to mark long-term reference pictures as "unused for reference". The frequency of transmitting max_long_term_frame_idx_plus1 is not specified by this Recommendation | International Standard. However, the encoder should send a memory_management_control_operation command equal to 4 upon receiving an error message, such as an intra refresh request message.

8.2.3.4.5 Marking process of all reference pictures as "unused for reference" and setting MaxLongTermFrameIdx to "no long-term picture indices"

This process is invoked when memory_management_control_operation is equal to 5.

All reference pictures are marked as "unused for reference" and the variable MaxLongTermFrameIdx is set equal to "no long-term picture indices".

8.2.3.4.6 Process for assigning a long-term picture index to the current picture

This process is invoked when memory_management_control_operation is equal to 6.

When a variable LongTermFrameIdx equal to long_term_frame_idx is already assigned to a long-term reference picture, that picture is marked as "unused for reference".

The current picture is marked as "used for long-term reference" and assigned LongTermFrameIdx equal to long_term_frame_idx.

After marking the current decoded reference picture, the total number of pictures that are marked as "used for reference" shall not be greater than Max(max_num_ref_frames, 1).

HEVC

NOTE – Under some circumstances, the above statement may impose a constraint on the order in which a memory_management_control_operation syntax element equal to 6 can appear in the decoded reference picture marking syntax relative to a memory_management_control_operation syntax element equal to 1, 2, 3, or 4.

8.3 Decoding process for coding units coded in intra prediction mode

Inputs to this process are:

- a luma location (xB, yB) specifying the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit.

Output of this process is:

- a modified reconstructed picture before deblocking filtering.

A variable nS is set equal to (1 << log2CUsSize).

Depending on pcm_flag and IntraSplitFlag, the decoding process for luma samples is specified as follows.

- If pcm_flag is equal to 1, the reconstructed picture is modified as follows:

```
recSamplesy[ xB + i, yB + j ] =
  pcm_sample_luma[ ( nS * j ) + i ] << ( BitDepthy – PCMBitDepthy ), with i, j = 0..nS-1 (8-141413)
```

- Otherwise (pcm_flag is equal to 0), If if IntraSplitFlag is equal to 0, the following ordered steps apply:

1. The derivation process for the intra prediction mode as specified in subclause **Error! Reference source not found. 8.3.1** is invoked with the luma location (xB, yB) and the variable log2TrafoSize set equal to log2CUsSize as well as IntraPredMode that is previously (in decoding order) derived for adjacent coding units as the input and the output is the variable IntraPredMode[xB][yB].

2. The decoding process for intra blocks as specified in subclause 8.3.3 is invoked with the luma location (xB, yB), the variable log2TrafoSize set equal to log2CUsSize, the variable trafoDepth set equal to 0, the luma intra prediction mode IntraPredMode[xB][yB] and the variable cIdx set equal to 0 as the inputs and the output is a modified reconstructed picture before deblocking filtering.

- Otherwise (pcm_flag is equal to 0 and IntraSplitFlag is equal to 1), for the variable blkIdx proceeding over the values 0..3, the following ordered steps apply:

1. The variable xBS is set equal to xB + ((1 << log2CUsSize) – nS >> 1) * (blkIdx % 2).
2. The variable yBS is set equal to yB + ((1 << log2CUsSize) – nS >> 1) * (blkIdx / 2).
3. The derivation process for the intra prediction mode as specified in subclause **Error! Reference source not found. 8.3.1** is invoked with the luma location (xBS, yBS) and the variable log2TrafoSize set equal to log2CUsSize – 1 as well as IntraPredMode that is previously (in decoding order) derived for adjacent coding units as the input and the output is the variable IntraPredMode[xBS][yBS].
4. The decoding process for intra blocks as specified in subclause 8.3.3 is invoked with the luma location (xBS, yBS), the variable log2TrafoSize set equal to log2CUsSize – 1, the variable trafoDepth set equal to 1, the luma intra prediction mode IntraPredMode[xBS][yBS] and the variable cIdx set equal to 0 as the inputs and the output is a modified reconstructed picture before deblocking filtering.

Depending on pcm_flag, The the decoding process for chroma samples is specified as follows in the following ordered steps:

- If pcm_flag is equal to 1, the reconstructed picture is modified as follows:

```
recSamplescb[ xB/2 + i, yB/2 + j ] =
  pcm_sample_chroma[ ( nS/2 * j ) + i ] << ( BitDepthc – PCMBitDepthc ) with i, j = 0..nS/2-1 (8-154513)
```

```
recSamplescr[ xB/2 + i, yB/2 + j ] =
  pcm_sample_chroma[ ( nS/2 * ( j + nS ) ) + i ] << ( BitDepthc – PCMBitDepthc ) with i, j = 0..nS/2-1 (8-164613)
```

- Otherwise (pcm_flag is equal to 0), for the variable blkIdx proceeding over the values 0..3, the following ordered steps apply:

Formatted: Subscript

Formatted: Tab stops: 0.79", Left

Formatted: Subscript

Formatted: Subscript

Formatted: Indent: Left: 0.2", Hanging: 0.3", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28"

Formatted: Tab stops: 0.79", Left

HEVC

1. The derivation process for the chroma intra prediction mode as specified in 8.3.2 is invoked with the luma location (xB, yB) as input and the output is the variable IntraPredModeC.
2. The decoding process for intra blocks as specified in subclause 8.3.3 is invoked with the chroma location (xB/2, yB/2), the variable log2TrafoSize set equal to log2CUsSize-1, the variable trafoDepth set equal to 0, the chroma intra prediction mode IntraPredModeC, and the variable cldx set equal to 1 as the inputs and the output is a modified reconstructed picture before deblocking filtering.
3. The decoding process for intra blocks as specified in subclause 8.3.3 is invoked with the chroma location (xB/2, yB/2), the variable log2TrafoSize set equal to log2CUsSize-1, the variable trafoDepth set equal to 0, the chroma intra prediction mode IntraPredModeC, and the variable cldx set equal to 2 as the inputs and the output is a modified reconstructed picture before deblocking filtering.

8.3.1 Derivation process for luma intra prediction mode

Inputs to this process are:

- a luma location (xB, yB) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current picture,
- a variable log2TrafoSize specifying the size of the current prediction unit,
- variable arrays IntraPredMode (If available) that are previously (in decoding order) derived for adjacent coding units.

Output of this process is the variable IntraPredMode[xB][yB].

Table 8-1Table 8-5 specifies the value for the intra prediction mode and the associated names.

Table 8-145 – Specification of intra prediction mode and associated names

Intra prediction mode	Associated names
0	Intra_Vertical
1	Intra_Horizontal
2	Intra_DC
Otherwise (3..33)	Intra_Angular
34	Intra_Planar
35	Intra_FromLuma (used only for chroma)

Table 8-2Table 8-4 specifies the number of luma intra prediction modes intraPredModeNum depending on log2TrafoSize.

Table 8-2218-18-1 – Specification of intraPredModeNum

log2TrafoSize	intraPredModeNum
2	187
3	3435
4	3435
5	3435
6	34

Table 8-3Table 8-2 specifies the mapping table used for converting the number of intra prediction modes.

Table 8-3328-28-2 – Specification of mapIntraPredMode5, mapIntraPredMode3 and mapIntraPredMode9

value	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
mapIntraPredMode35[value]	0	1	2	32	42	0	2	1	1	2	2	0	0	2	2	1	1
mapIntraPredMode9[value]	0	1	2	3	4	5	6	7	8	2	2	2	2	2	2	2	2
value	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
mapIntraPredMode35[value]	2	32	42	42	0	0	0	2	2	2	2	1	1	1	1	2	2
mapIntraPredMode9[value]	2	3	4	4	0	0	5	5	6	3	7	7	1	1	8	8	2

IntraPredMode[xB][yB] labelled 0, 1, 2, ..., 33 represents directions of predictions as illustrated in Figure 8-1.

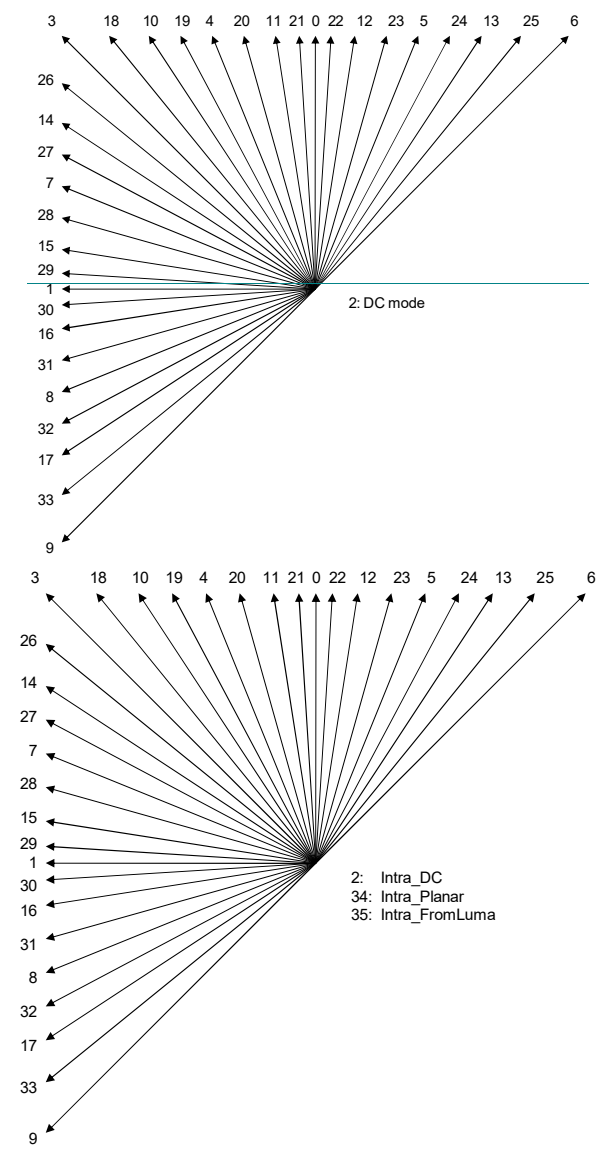


Figure 8-1 – Intra prediction mode directions (informative)

IntraPredMode[xB][yB] is derived as follows the following ordered steps. [Ed. (WJ): proponent suggests to move this part to the syntax since the other syntax elements utilize IntraPredMode. But it seems too complex to move all the following process to the syntax table. Maybe it's better to move this part to the semantics section or simply avoid the use of IntraPredMode to parse the syntax item]

1. ———The derivation process for neighbouring treeblocks specified in subclause XXX with (xB, yB) given as input and the output is assigned to tbAddrA and tbAddrB specifying the treeblock addresses of treeblocks

Formatted: Indent: Left: 0", First line: 0", Tab stops: 0", Left + Not at 0.2"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5", Tab stops: 0.49", Left + Not at 0.55"

HEVC

covering (xBA, yBA) and (xBB, yBB) respectively where (xBA, yBA) is set equal to (xB-1, yB) and (xBB, yBB) is set equal to (xB, yB-1).

2. For N being either replaced A or B, the variables intraPredModeN are derived as follows.

- If the treeblock with address tbAddrN is not available, intraPredModeN is set equal to -1
- Otherwise, if the coding unit covering (xBN, yBN) is not coded as intra mode, intraPredModeN is set equal to 2Intra_DC.
- Otherwise, intraPredModeN is set equal to IntraPredMode[xBN][yBN], where IntraPredMode is the variable array assigned to the coding unit covering the luma location (xBN, yBN).

3. For N being either replaced A or B, the variables intraPredModeN are further modified to be equal to Intra_DC when intraPredModeN is equal to Intra_Planar.

4. For N being either replaced A or B, the variables candIntraPredModeN are derived as follows.

- If intraPredModeN is greater than or equal to intraPredModeNum
 - If intraPredModeNum is equal to 5 ~~34~~ then candIntraPredModeN is set equal to mapIntraPredMode5 ~~mapIntraPredMode3~~ [intraPredModeN]
 - ~~If intraPredModeNum is equal to 3 then candIntraPredModeN is set equal to mapIntraPredMode3[intraPredModeN]~~
 - Otherwise candIntraPredModeN is set equal to mapIntraPredMode9[intraPredModeN].
- Otherwise, candIntraPredModeN is set equal to intraPredModeN

5. The candModeList[x] and NumMPMCand are derived as follows:

- If both candIntraPredModeN are not available, then the value 2 is assigned to candModeList[0] and NumMPMCand is set equal to 1
- Otherwise, if only one candIntraPredModeN is available or if both candIntraPredModeN are the same, then this candIntraPredModeN is assigned to candModeList[0] and NumMPMCand is set equal to 1
- Otherwise, both candIntraPredModeN are assigned to the candidate modes list with the smaller of the two candidates at candModeList[0] and the larger at candModeList[1] and NumMPMCand is set equal to 2.

6. IntraPredMode[xB][yB] is derived by applying the following procedure.

- If prev_intra_pred_flag[xB][yB] is true, the IntraPredMode[xB][yB] is set equal to ~~candModeList[mpm_idx[xB][yB]]~~
- Otherwise IntraPredMode[xB][yB] is derived by applying the following procedure
 - IntraPredMode[xB][yB] = rem_intra_pred_mode
 - for (cIdx = 0; cIdx < NumMPMCand; cIdx++)

if (IntraPredMode[xB][yB] >= candModeList[cIdx]) IntraPredMode[xB][yB]++

7. When IntraPredMode[xB][yB] is equal to Intra_DC and planar_flag_luma is equal to 1, IntraPredMode[xB][yB] is further modified to be equal to Intra_Planar.

Formatted: Indent: Left: 0.51", Tab stops: 0.28", List tab + 0.79", Left + Not at 0.49" + 0.75"

Formatted: (Asian) Korean

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5", Tab stops: 0.49", Left + Not at 0.55"

Formatted: (Asian) Korean

Formatted: Indent: Left: 0.51", Tab stops: 0.28", List tab + 0.79", Left + 2.07", Left + Not at 0.5" + 0.75"

Formatted: (Asian) Korean

Formatted: Indent: Left: 0.5", Tab stops: 0.2", Left + 0.49", Left + Not at 0.55"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5", Tab stops: 0.2", Left + 0.49", Left + Not at 0.55"

8.3.2 Derivation process for chroma intra prediction mode

[Ed.: (WJ) this subclause may be moved to the semantics of intra_chroma_pred_mode syntax]

Input to this process is a luma location (xB, yB) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current picture.

Output of this process is the variable IntraPredModeC.

The chroma intra prediction mode IntraPredModeC is derived as specified in Table 8-4 ~~Table 8-3~~ Table 8-3 or Table 8-5 ~~Table 8-4~~ with intra_chroma_pred_mode, and ~~and~~ IntraPredMode[xB][yB] and ~~and~~ chroma_pred_from_luma_enabled_flag as inputs.

IntraPredModeC is further modified to be equal to Intra_Planar when IntraPredModeC is equal to Intra_DC and planar_flag_chroma is equal to 1.

HEVC

Table 8-443 38-3 – Specification of IntraPredModeC according to the values of intra_chroma_pred_mode and IntraPredMode[xB][yB] when chroma_pred_from_luma_enabled flag is equal to 1

intra_chroma_pred_mode	IntraPredMode[xB][yB]				
	0	1	2	3	X (4 <= X < 3435)
0	0345	1345	2345	3345	X345
1	4n/a	0	0	0	0
2	21	2n/a	1	1	1
3	32	32	2n/a2	2	2
4	n/a0	n/a1	n/a2	n/a3	3X

Formatted: Highlight

Table 8-554 – Specification of IntraPredModeC according to the values of intra_chroma_pred_mode and IntraPredMode[xB][yB] when chroma_pred_from_luma_enabled flag is equal to 0

intra_chroma_pred_mode	IntraPredMode[xB][yB]				
	0	1	2	3	X (4 <= X < 345)
0	n/a	0	0	0	0
1	1	n/a	1	1	1
2	2	2	n/a2	2	2
3	0	1	2	3	X

Formatted: Caption

Formatted: Highlight

[Ed. (WJ): is it possible that intra_chroma_pred_mode = 2 and IntraPredMode[xB][yB] = 2? Since it is actually overlapped with the case that intra_chroma_pred_mode = 3 (derivation from luma) and IntraPredMode[xB][yB] = 2]

Formatted: Normal, Indent: Left: 0", Tab stops: 0", Left + Not at 0.59" + 0.79" + 0.98"

8.3.3 Decoding process for intra blocks

Inputs to this process are:

- a luma-sample location (xB, yB) specifying the top-left sample of the current block relative to the top-left sample of the current picture,
- a variable log2TrafoSize specifying the size of the current block,
- a variable trafoDepth specifying the hierarchy depth of the current block relative to the coding unit,
- a variable intraPredMode specifying the intra prediction mode.
- a variable cldx specifying the chroma component of the current block,

Output of this process is:

- a modified reconstructed picture before deblocking filtering.

Depending split_transform_flag[xB][yB][trafoDepth], the following applies:

- If split_transform_flag[xB][yB][trafoDepth] is equal to 1, the following ordered steps apply:
 1. The variable xB1 is set equal to xB + ((1 << log2TrafoSize) >> 1).
 2. The variable yB1 is set equal to yB + ((1 << log2TrafoSize) >> 1).
 3. The decoding process for intra blocks as specified in this subclause is invoked with the location (xB, yB), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the intra prediction mode intraPredMode, and the variable cldx as the inputs and the output is a modified reconstructed picture before deblocking filtering.
 4. The decoding process for intra blocks as specified in this subclause is invoked with the location (xB1, yB), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the intra prediction mode intraPredMode, and the variable cldx as the inputs and the output is a modified reconstructed picture before deblocking filtering.

HEVC

5. The decoding process for intra blocks as specified in this subclause is invoked with the location (xB, yB), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the intra prediction mode intraPredMode, and the variable cldx as the inputs and the output is a modified reconstructed picture before deblocking filtering.
 6. The decoding process for intra blocks as specified in this subclause is invoked with the location (xB1, yB1), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the intra prediction mode intraPredMode, and the variable cldx as the inputs and the output is a modified reconstructed picture before deblocking filtering.
- Otherwise (split_transform_flag[xB][yB][trafoDepth] is equal to 0), the following ordered steps apply:
1. The variable nS is set equal to 1 << log2TrafoSize.
 2. The intra sample prediction process as specified in subclause 8.3.3.1 is invoked with the location (xB, yB), the intra prediction mode intraPredMode, the prediction size nS and the variable cldx as the inputs and the output is a (nS)x(nS) array predSamples.
 3. The scaling and transformation process as specified in subclause 8.5.1 is invoked with the location (xB, yB), the variable trafoDepth, the variable cldx, and the transform size trafoSize set equal to nS as the inputs and the output is a (nS)x(nS) array resSamples.
 4. The **residual signal accumulation process** as specified in subclause XXX is invoked with the variable arraySize set equal to nS, the (nS)x(nS) array predSamples, and the (nS)x(nS) array resSamples as the inputs and the output is a (nS)x(nS) array recSamples.
 5. The **picture reconstruction process** for a component before deblocking filtering as specified in subclause XXX is invoked with the location (xB, yB), the variable arraySize set equal to nS, the variable cldx set equal to 0, and the (nS)x(nS) array recSamples as the inputs and the output is a modified reconstructed picture before deblocking filtering.

8.3.3.1 Intra sample prediction

Inputs to this process are:

- a sample location (xB, yB) specifying the top-left sample of the current block relative to the top-left sample of the current picture,
- a variable intraPredMode specifying the luma intra prediction mode,
- a variable nS specifying the prediction size.
- a variable cldx specifying the chroma component of the current block,

Output of this process is:

- the predicted samples predSamples[x, y], with x, y = 0..nS-1.

The nS*4+1 neighbouring samples p[x, y] that are constructed luma samples prior to the deblocking filter process, with x = -1, y = -1..nS*2-1 and x = 0..nS*2-1, y = -1, are derived as follows.

- The luma location (xBN, yBN) is specified by

$$xBN = xB + x \quad (8-17+7+4)$$

$$yBN = yB + y \quad (8-18+8+5)$$

- The derivation process for neighbouring locations in subclause XXX is invoked for sample location with (xBN, yBN) as input and the treeblock address tbAddrN as output.
- Each sample p[x, y] with x = -1, y = -1..nS*2-1 and x = 0, y = -1 is derived as follows
 - If any of the following condition is true, the sample p[x, y] is marked as “not available for intra prediction”
 - tbAddrN is not available
 - the coding unit covering (xBN, yBN) is not coded as intra mode and constrained_intra_pred_flag is equal to 1
 - Otherwise, the sample p[x, y] is marked as “available for intra prediction” and the sample at the location (xBN, yBN) inside the treeblock tbAddrN is assigned to p[x, y]

HEVC

When `intraPredMode` is equal to 2, if at least one sample `p[ x, y ]` with `x = -1, y = 0..nS-1` and `x = 0..nS-1, y = -1` is marked as “not available for intra prediction” or `cIdx` is not equal to 0, `DCPredFilterFlag` is set equal to 0. Otherwise, `DCPredFilterFlag` is set equal to 1.

[Ed. (WJ): reference sample substitution process eliminates the needs to check the availability of samples except DC mode. Maybe it's better to remove this checking even for DC mode for the consistency]

When at least one sample `p[ x, y ]` with `x = 1, y = 1..nS*2-1` and `x = 0..nS*2-1, y = 1` is marked as “not available for intra prediction,” the reference sample substitution process for intra sample prediction in subclause 8.3.3.1.1 is invoked with the samples `p[ x, y ]` with `x = 1, y = 1..nS*2-1` and `x = 0..nS*2-1, y = 1` as input and the modified samples `p[ x, y ]` with `x = 1, y = 1..nS*2-1` and `x = 0..nS*2-1, y = 1` as output.

Table 8-4 specifies the value for `intraPredMode` and the associated names.

Table 8-48-4 — Specification of `intraPredMode` and associated names

<code>intraPredMode</code>	Name of <code>intraPredMode</code>
0	Intra_Vertical
1	Intra_Horizontal
2	Intra_DC
Otherwise (3..33)	Intra_Angular
34	Intra_FromLuma (used only for chroma)

Depending on `intraPredMode`, the following ordered steps apply:

1. When `cIdx` is equal to 0, filtering process of neighbouring samples specified in 8.3.3.1.2 is invoked with the sample array `p` and the prediction size `nS` as the inputs and the output is reassigned to the sample array `p.a(2*nS+1)x(2*nS+1)` filtered sample array `pF`.
2. Intra sample prediction process according to `intraPredMode` applies as follows:
 1. ~~Process Intra process and Otherwise, if `intraPredMode` is equal to 34, Intra_FromLuma prediction process specified in subclause 8.3.3.1.8 is invoked with the sample location (`xB, yB`), the sample array `p` and the prediction size `nS` as the inputs and the output is the predicted sample array `predSamples`.~~
 2. One of the intra prediction modes specified in subclause 8.3.3.1.38-8.3.3.1.2 to 8.3.3.1.88-8.3.3.1.6 is invoked with the sample array `pF` and the prediction size `nS` as the inputs and the output is the predicted sample array `predSamples` according to `intraPredMode`.

3-8.3.3.1.1 Reference sample substitution process for intra sample prediction

Inputs to this process are the reference samples `p[ x, y ]` with `x = -1, y = -1..nS*2-1` and `x = 0..nS*2-1, y = -1` for intra sample prediction.

Outputs of this process are the modified reference samples `p[ x, y ]` with `x = -1, y = -1..nS*2-1` and `x = 0..nS*2-1, y = -1` for intra sample prediction.

The values of the samples `p[ x, y ]` with `x = -1, y = -1..nS*2-1` and `x = 0..nS*2-1, y = -1` are modified as follows:

- If all samples `p[ x, y ]` with `x = -1, y = -1..nS*2-1` and `x = 0..nS*2-1, y = -1` are marked as “not available for intra prediction,” the value (`1 << ( BitDepthy - 1 )`) is substituted for the values of all samples `p[ x, y ]`.
- Otherwise (at least one but not all samples `p[ x, y ]` are marked as “not available for intra prediction”), the following steps are performed for each sample `p[ x0, y0 ]` with `x0 = -1, y0 = -1..nS*2-1` and `x0 = 0..nS*2-1, y0 = -1` marked as “not available for intra prediction”:
 - Let the variables `q` and `r` be initially set to -1.
 - The variable `q` is modified as follows:
 - If `x0` is equal to -1, a reference sample `p[ x, y ]` marked as “available for intra prediction” is identified by searching sequentially among `p[ x, y ]` starting from `x = -1, y = y0+1` to `x = -1, y = nS*2-1`. As soon as a sample marked as “available for intra prediction” is found, the search is terminated and the value of `p[ x, y ]` is assigned to `q`. [Ed.: (WJ) is there any elegant way rather than searching?]

Formatted: Indent: Left: 0.49", Hanging: 0.3", Bulleted + Level: 2 + Aligned at: 0.75" + Tab after: 1" + Indent at: 1", Tab stops: 0.79", Left + Not at 0.75"

Formatted: Heading 5, No bullets or numbering, Tab stops: Not at 0.75" + 1" + 2.07"

- Otherwise (x_0 is not equal to -1), a sample marked as “available for intra prediction” is identified among the samples $p[x, y]$ by searching sequentially starting from $x = x_0 - 1, y = -1$ to $x = -1, y = -1$. When a sample marked as “available for intra prediction” is not found among $p[x, y]$ with $x = x_0 - 1, y = -1$, the search is continued among $p[x, y]$ sequentially starting from $x = -1, y = 0$ to $x = -1, y = nS^2 - 1$. As soon as a sample marked as “available for intra prediction” is found, the search is terminated and the value of $p[x, y]$ is assigned to q . [Ed.: (WJ) is there any elegant way rather than searching?]
- The variable r is modified as follows:
 - If x_0 is equal to -1, a sample marked as “available for intra prediction” is identified among the samples $p[x, y]$ by searching sequentially starting from $x = -1, y = y_0 - 1$ to $x = -1, y = -1$. When a sample marked as “available for intra prediction” is not found among $p[x, y]$ with $x = -1, y = y_0 - 1, y = -1$, the search is continued among $p[x, y]$ sequentially starting from $x = 0, y = -1$ to $x = nS^2 - 1, y = -1$. As soon as a sample marked as “available for intra prediction” is found, the search is terminated and the value of $p[x, y]$ is assigned to r . [Ed.: (WJ) is there any elegant way rather than searching?]
 - Otherwise (x_0 is not equal to -1), a sample marked as “available for intra prediction” is identified among the samples $p[x, y]$ by searching sequentially starting from $x = x_0 + 1, y = -1$ to $x = nS^2 - 1, y = -1$. As soon as a sample marked as “available for intra prediction” is found, the search is terminated and the value of $p[x, y]$ is assigned to r . [Ed.: (WJ) is there any elegant way rather than searching?]
- The value of the sample $p[x_0, y_0]$ is modified as follows:
 - If q is not equal to -1 and r is not equal to -1, the value $((q + r + 1) \gg 1)$ is substituted for the value of $p[x_0, y_0]$.
 - Otherwise, if q is not equal to -1, the value of q is substituted for the value of $p[x_0, y_0]$.
 - Otherwise (q is equal to -1 and r is not equal to -1), the value of r is substituted for the value of $p[x_0, y_0]$.

All samples $p[x, y]$ with $x = -1, y = -1..nS^2 - 1$ and $x = 0..nS^2 - 1, y = -1$ are marked as “available for intra prediction.”

8.3.3.1.18.3.3.1.2 Filtering process of neighbouring samples

Inputs to this process are:

- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS - 1$,
- a variable nS specifying the prediction size.

Output of this process is:

- filtered samples $pF[x, y]$, with $x, y = -1..2*nS - 1$.

Table 8-68-58-5 – Specification of intraFilterType[nS][IntraPredMode] for various prediction unit sizes

IntraPredMode	intraFilterType for nS = 4	intraFilterType for nS = 8	intraFilterType for nS = 16	intraFilterType for nS = 32	intraFilterType for nS = 64
0	0	0	0	0	0
1	0	0	0	0	0
2	0	0	0	0	0
3	1	1	21	21	21
4	0	1	21	21	21
5	0	21	21	21	0
6	1	21	21	21	0
7	0	21	21	21	0
8	0	1	21	21	0
9	1	1	21	21	0
10	0	0	21	21	0
11	0	0	21	21	0
12	0	0	21	21	0
13	0	0	21	21	0
14	0	0	21	21	0
15	0	0	21	21	0
16	0	0	21	21	0
17	0	0	21	21	0
18-33	0	0	0	21	0
34	0	0	0	0	0
35	n/a	n/a	n/a	n/a	n/a

Filtered sample array pF[x, y] with $x = -1..nS*2-1$ and $y = -1..nS*2-1$ are derived as follows:

– If When intraFilterType[nS][IntraPredMode] is equal to 1, the following applies:

$$pF[-1, nS*2-1] = p[-1, nS*2-1] \quad (8-191917)$$

$$pF[nS*2-1, -1] = p[nS*2-1, -1] \quad (8-202018)$$

$$pF[-1, y] = (p[-1, y+1] + 2*p[-1, y] + p[-1, y-1] + 2) >> 2 \text{ for } y = nS*2-2..0 \quad (8-212119)$$

$$pF[-1, -1] = (p[-1, 0] + 2*p[-1, -1] + p[0, -1] + 2) >> 2 \quad (8-222220)$$

$$pF[x, -1] = (p[x-1, -1] + 2*p[x, -1] + p[x+1, -1] + 2) >> 2 \text{ for } x = 0..nS*2-2 \quad (8-232321)$$

— Otherwise, intraFilterType[nS][IntraPredMode] is equal to 2, the following applies:

$$pF[-1, nS*2-1] = p[-1, nS*2-1] \quad (8-22)$$

$$pF[nS*2-1, -1] = p[nS*2-1, -1] \quad (8-23)$$

$$pF[-1, y] = (p[-1, y+1] + 2*p[-1, y] + p[-1, y-1] + 2) >> 2 \text{ for } y = nS*2-2..0 \quad (8-24)$$

$$pF[-1, -1] = (p[-1, 0] + 2*p[-1, -1] + p[0, -1] + 2) >> 2 \quad (8-25)$$

$$pF[x, -1] = (p[x-1, -1] + 2*p[x, -1] + p[x+1, -1] + 2) >> 2 \text{ for } x = 0..nS*2-2 \quad (8-26)$$

$$pF[-1, y] = (pF[-1, y+1] + 2*pF[-1, y] + pF[-1, y-1] + 2) >> 2 \text{ for } y = nS*2-2..0 \quad (8-27)$$

Formatted: Normal, Indent: Left: 0", Hanging: 0.2", Tab stops: 0.2", Left + Not at 0.59" + 0.79" + 0.98"

HEVC

$$pF[-1, -1] = (pF[-1, 0] + 2 * pF[-1, -1] + pF[0, -1] + 2) >> 2 \quad (8-28)$$

$$pF[x, -1] = (pF[x-1, -1] + 2 * pF[x, -1] + pF[x+1, -1] + 2) >> 2 \text{ for } x = 0..nS-2 \quad (8-29)$$

8.3.3.1.28.3.3.1.3 Specification of Intra_Vertical prediction mode

Inputs to this process are:

- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS-1$,
- a variable nS specifying the prediction size.

Output of this process is:

- predicted samples $predSamples[x, y]$, with $x, y = 0..nS-1$.

This intra prediction mode is invoked when $intraPredMode$ is equal to 0.

The values of the prediction samples $predSamples[x, y]$, with $x, y = 0..nS-1$, are derived by

$$predSamples[x, y] = p[x, -1], \text{ with } x, y = 0..nS-1 \quad (8-242430)$$

8.3.3.1.38.3.3.1.4 Specification of Intra_Horizontal prediction mode

Inputs to this process are:

- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS-1$,
- a variable nS specifying the prediction size.

Output of this process is:

- predicted samples $predSamples[x, y]$, with $x, y = 0..nS-1$.

This intra prediction mode is invoked when $intraPredMode$ is equal to 1.

The values of the prediction samples $predSamples[x, y]$, with $x, y = 0..nS-1$, are derived by

$$predSamples[x, y] = p[-1, y], \text{ with } x, y = 0..nS-1 \quad (8-252534)$$

8.3.3.1.48.3.3.1.5 Specification of Intra_DC prediction mode

Inputs to this process are:

- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS-1$,
- a variable nS specifying the prediction block size,

the bit depth of the chroma component, bitDepth.

Output of this process is:

- predicted samples $predSamples[x, y]$, with $x, y = 0..nS-1$.

This intra prediction mode is invoked when $intraPredMode$ is equal to 2.

The values of the prediction samples $predSamples[x, y]$, with $x, y = 0..nS-1$, are derived as follows: the following ordered steps:

— If all samples $p[x, -1]$, with $x = 0..nS-1$ and $p[-1, y]$, with $y = 0..nS-1$ are marked as “available for intra prediction,” the values of the prediction samples $predSamples[x, y]$, with $x, y = 0..nS-1$ are derived as the following ordered steps:

1. A variable $DCVal$ is derived as:

by

$$predSamples[x, y]DCVal = \left(\sum_{x'=0}^{nS-1} p[x', -1] + \sum_{y'=0}^{nS-1} p[-1, y'] + nS \right) >> (k+1), \text{ with } x, y = 0..nS-1 \quad (8-262632)$$

where $k = \log_2(nS)$

Formatted: Font: 10 pt

HEVC

2. Depending on the prediction block size nS, the following applies.

– If DCPredFilterFlag is equal to 1 and nS is less than 32, the following applies.

– If nS is equal to 4, the prediction samples predSamples[x, y] are derived as

$$\text{predSamples}[0, 0] = (3 * p[-1, 0] + 2 * \text{DCVal} + 3 * p[0, -1] + 4) \gg 3 \quad (8-272732)$$

$$\text{predSamples}[x, 0] = (3 * p[x, -1] + 5 * \text{DCVal} + 4) \gg 3, \text{ with } x = 1..nS-1 \quad (8-282832)$$

$$\text{predSamples}[0, y] = (3 * p[-1, y] + 5 * \text{DCVal} + 4) \gg 3, \text{ with } y = 1..nS-1 \quad (8-292932)$$

$$\text{predSamples}[x, y] = \text{DCVal}, \text{ with } x, y = 1..nS-1 \quad (8-303032)$$

– Otherwise, if nS is equal to 8, the prediction samples predSamples[x, y] are derived as

$$\text{predSamples}[0, 0] = (1 * p[-1, 0] + 2 * \text{DCVal} + 1 * p[0, -1] + 2) \gg 2 \quad (8-313132)$$

$$\text{predSamples}[x, 0] = (1 * p[x, -1] + 3 * \text{DCVal} + 2) \gg 2, \text{ with } x = 1..nS-1 \quad (8-32)$$

$$\text{predSamples}[0, y] = (1 * p[-1, y] + 3 * \text{DCVal} + 2) \gg 2, \text{ with } y = 1..nS-1 \quad (8-333332)$$

$$\text{predSamples}[x, y] = \text{DCVal}, \text{ with } x, y = 1..nS-1 \quad (8-343432)$$

– Otherwise, if nS is equal to 16, the prediction samples predSamples[x, y] are derived as

$$\text{predSamples}[0, 0] = (1 * p[-1, 0] + 6 * \text{DCVal} + 1 * p[0, -1] + 4) \gg 3 \quad (8-353532)$$

$$\text{predSamples}[x, 0] = (1 * p[x, -1] + 7 * \text{DCVal} + 4) \gg 3, \text{ with } x = 1..nS-1 \quad (8-363632)$$

$$\text{predSamples}[0, y] = (1 * p[-1, y] + 7 * \text{DCVal} + 4) \gg 3, \text{ with } y = 1..nS-1 \quad (8-373732)$$

$$\text{predSamples}[x, y] = \text{DCVal}, \text{ with } x, y = 1..nS-1 \quad (8-383832)$$

– Otherwise, the prediction samples predSamples[x, y] are derived as

$$\text{predSamples}[x, y] = \text{DCVal}, \text{ with } x, y = 0..nS-1 \quad (8-393932)$$

– Otherwise, If all samples p[x, -1], with x=0..nS-1 are marked as “not available for intra prediction” and all samples p[-1, y], with y=0..nS-1 are marked as “available for intra prediction,” the values of the prediction samples predSamples[x, y], with x, y=0..nS-1 are derived by

$$\text{predSamples}[x, y] = \left(\sum_{y'=0}^{nS-1} p[-1, y'] + (nS \gg 1) \right) \gg k, \text{ with } x, y = 0..nS-1 \quad (8-33)$$

where $k = \log_2(nS)$

– Otherwise, If all samples p[x, -1], with x=0..nS-1 are marked as “available for intra prediction” and all samples p[-1, y], with y=0..nS-1 are marked as “not available for intra prediction,” the values of the prediction samples predSamples[x, y], with x, y=0..nS-1 are derived by

$$\text{predSamples}[x, y] = \left(\sum_{x'=0}^{nS-1} p[x', -1] + (nS \gg 1) \right) \gg k, \text{ with } x, y = 0..nS-1 \quad (8-34)$$

where $k = \log_2(nS)$

– Otherwise, the values of the prediction samples predSamples[x, y], with x, y=0..nS-1 are derived by

$$\text{predSamples}[x, y] = 1 \ll ((\text{bitDepth} - \text{BitDepth}_y + \text{increased_bit_depth_luma}) - 1) \quad (8-35)$$

[Ed: (WJ) current software implementation seems different. It uses division operation and may have a bug when both above and left samples are not available]

8.3.3.1.58.3.3.1.6 Specification of Intra_Angular prediction mode

[Ed: (WJ) provided text from JCTVC-C042 was modified. It still needs to be improved]

Inputs to this process are:

- neighbouring samples p[x, y], with x, y = -1..2*nS-1,
- a variable nS specifying the prediction size.

Formatted: Normal, Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + 1.38", List tab + Not at 0.28" + 0.59" + 0.79" + 0.98"

Formatted: English (United Kingdom)

Formatted: Indent: Left: 0.98", Tab stops: Not at 0.59" + 0.79"

Formatted: Font: 10 pt, English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: Normal, Indent: Left: 0.73", Bulleted + Level: 1 + Aligned at: 0.49" + Indent at: 0.74", Tab stops: 0.5", Left + 1", Left + 1.18", Left + Not at 0.59" + 0.79" + 0.98"

Formatted

[1]

Formatted: Indent: Left: 0.98", Tab stops: Not at 0.59" + 0.79"

Formatted: English (United Kingdom)

Formatted

[2]

Formatted: Normal, Indent: Left: 0.73", Bulleted + Level: 1 + Aligned at: 0.49" + Indent at: 0.74", Tab stops: 0.5", Left + 1", Left + 1.18", Left + Not at 0.59" + 0.79" + 0.98"

Formatted

[3]

Formatted: Indent: Left: 0.98", Tab stops: Not at 0.59" + 0.79"

Formatted: English (United Kingdom)

Formatted: Normal, Bulleted + Level: 1 + Aligned at: 0.49" + Indent at: 0.74", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.59" + 0.79" + 0.98"

Formatted: Normal, Indent: Left: 0", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.59" + 0.79" + 0.98"

Formatted: Indent: Left: 0.59"

Output of this process is:

– predicted samples `predSamples[ x, y ]`, with `x, y =0..nS-1`.

This intra prediction mode is invoked when `intraPredMode` is [in the range of 3..33](#)~~not equal to 0, 1, and 2~~.

[Table 8-7](#)~~Table 8-6~~ specifies the mapping table between `intraPredMode` and the rearranged intra prediction order `intraPredOrder`.

Table 8-7~~8-6~~ – Specification of `intraPredOrder`

intraPredMode	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
intraPredOrder	-	-	-	1	5	13	17	21	29	33	3	7	11	15	19	23	27
intraPredMode	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
intraPredOrder	31	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32

[Figure 8-2](#)~~Figure 8-2~~ illustrates the total 33 intra angles and [Table 8-8](#)~~Table 8-7~~ specifies the mapping table between `intraPredOrder` and the angle parameter `intraPredAngle`.

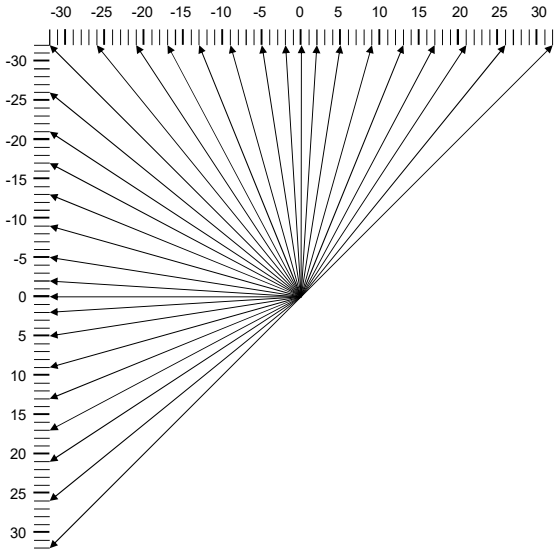


Figure 8-2 – Intra prediction angle definition (informative)

Table 8-8~~8-7~~ – Specification of `intraPredAngle`

intraPredOrder	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
intraPredAngle	-	-32	-26	-21	-17	-13	-9	-5	-2	-	2	5	9	13	17	21	26
intraPredOrder	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
intraPredAngle	32	-26	-21	-17	-13	-9	-5	-2	-	2	5	9	13	17	21	26	32

HEVC

Table 8-9 further specifies the mapping table between intraPredOrder and the inverse angle parameter invAngle.

Table 8-9 – Specification of invAngle

intraPredOrder	1	2	3	4	5	6	7	8
invAngle	-256	-315	-390	-482	-630	-910	-1638	-4096
intraPredOrder	18	19	20	21	22	23	24	25
invAngle	-315	-390	-482	-630	-910	-1638	-4096	-

The reference pixel array refMain[x], with $x = -nS..2*nS$ is specified as follows.

- If intraPredOrder is less than 18,

(8-404036)

$$\text{refMain}[x] = p[-1+x, -1], \text{ with } x = 0..nS$$
 - If intraPredAngle is less than 0,

(8-414137)

$$\text{refMain}[x] = p[-1, -1 + ((x * \text{invAngle} + 128) \gg 8)], \text{ with } x = (nS * \text{intraPredAngle}) \gg 5..-1$$
 - Otherwise,

(8-424238)

$$\text{refMain}[x] = p[-1+x, -1], \text{ with } x = nS+1..2*nS$$
- Otherwise,
- (8-434339)
- $$\text{refMain}[x] = p[-1, -1+x], \text{ with } x = 0..nS$$
- If intraPredAngle is less than 0,

(8-444440)

$$\text{refMain}[x] = p[-1 + ((x * \text{invAngle} + 128) \gg 8), -1], \text{ with } x = (nS * \text{intraPredAngle}) \gg 5..-1$$
 - Otherwise,

(8-454541)

$$\text{refMain}[x] = p[-1, -1+x], \text{ with } x = nS+1..2*nS$$

The values of the prediction samples predSamples[x, y], with $x, y = 0..nS-1$ are derived by the following procedures.

- The index variable iIdx and the multiplication factor iFact are derived by

(8-464642)

$$iIdx = ((y + 1) * \text{intraPredAngle}) \gg 5$$

(8-474743)

$$iFact = ((y + 1) * \text{intraPredAngle}) \&\& 31$$
- Depending on the value of iFact, the following applies.
 - If iFact is not equal to 0, the value of the prediction samples predSamples[x, y] is derived by

(8-484844)

$$\text{predSamples}[x, y] = ((32 - iFact) * \text{refMain}[x + iIdx + 1] + iFact * \text{refMain}[x + iIdx + 2] + 16) \gg 5$$
 - Otherwise, the value of the prediction samples predSamples[x, y] is derived by

(8-494945)

$$\text{predSamples}[x, y] = \text{refMain}[x + iIdx + 1]$$

8.3.3.1.7 Specification of Intra Planar prediction mode

Inputs to this process are:

- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS-1$,
- a variable nS specifying the prediction size,
- the bit-depth of the chroma component, bitDepth.

Formatted: Heading 5, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

HEVC

Output of this process is:

– predicted samples $\text{predSamples}[x, y]$, with $x, y = 0..nS-1$.

This intra prediction mode is invoked when intraPredMode is equal to 34.

The $\text{seedHor}[y]$ and $\text{seedVer}[x]$ arrays with $x, y = 0..nS-1$ are initialized as follows:

- If all samples $p[x, -1]$, with $x = 0..nS-1$ and $p[-1, y]$, with $y = 0..nS-1$ are marked as “available for intra prediction,” the initialization is done as $\text{seedHor}[y] = p[-1, y]$ and $\text{seedVer}[x] = p[x, -1]$.
- Otherwise, If all samples $p[x, -1]$, with $x = 0..nS-1$ are marked as “not available for intra prediction” and all samples $p[-1, y]$, with $y = 0..nS-1$ are marked as “available for intra prediction,” the initialization is done as $\text{seedHor}[y] = p[-1, y]$ and $\text{seedVer}[x] = p[-1, 0]$.
- Otherwise, If all samples $p[x, -1]$, with $x = 0..nS-1$ are marked as “available for intra prediction” and all samples $p[-1, y]$, with $y = 0..nS-1$ are marked as “not available for intra prediction,” the initialization is done as $\text{seedHor}[y] = p[-1, 0]$ and $\text{seedVer}[x] = p[x, -1]$.
- Otherwise, the initialization is done as $\text{seedHor}[y] = 1 \ll (\text{bitDepth} - 1)$ and $\text{seedVer}[x] = 1 \ll (\text{bitDepth} - 1)$.

The values of the prediction samples $\text{predSamples}[x, y]$, with $x, y = 0..nS-1$, are derived by

$$\text{predSamples}[x, y] = \left(\frac{(nS - 1 - x) * \text{seedHor}[-1, y] + (x + 1) * \text{seedVer}[nS - 1, -1] + (nS - 1 - y) * \text{seedVer}[x, -1] + (y + 1) * \text{seedHor}[-1, nS - 1] + nS \right) \gg (k + 1) \quad (8-505045)$$

with $x, y = 0..nS-1$ where $k = \log_2(nS)$

8.3.3.1.8 Specification of Intra FromLuma prediction mode

Inputs to this process are:

- a sample location (x_B, y_B) specifying the top-left sample of the current block relative to the top-left sample of the current picture,
- neighbouring samples $p[x, y]$, with $x, y = -1..2*nS-1$,
- a variable nS specifying the prediction size.

Output of this process is:

– predicted samples $\text{predSamples}[x, y]$, with $x, y = 0..nS-1$.

This intra prediction mode is invoked when intraPredMode is equal to 345.

The values of the prediction samples $\text{predSamples}[x, y]$, with $x, y = 0..nS-1$, are derived as the following ordered steps:

1. Variable $k3$ and the sample array p_y' are derived as:

$$k3 = \text{Max}(0, \text{BitDepth}_c + \log_2(nS) - 14) \quad (8-515130)$$

$$p_y'[x, y] = (\text{recSamples}_l[2x, 2y] + \text{recSamples}_l[2x, 2y+1]) \gg 1, \text{ with } x, y = -1..2*nS \quad (8-525230)$$

2. Variables L, C, LL, LC and $k2$ are derived as follows:

– If all samples $p[x, -1]$, with $x = 0..nS-1$ and $p[-1, y]$, with $y = 0..nS-1$ are marked as “available for intra prediction” the variables L, C, LL and LC are derived as:

$$L = \left(\sum_{y=0}^{nS-1} p_y'[-1, y] + \sum_{x=0}^{nS-1} p_y'[x, -1] \right) \gg k3 \quad (8-535330)$$

$$C = \left(\sum_{y=0}^{nS-1} p[-1, y] + \sum_{x=0}^{nS-1} p[x, -1] \right) \gg k3 \quad (8-545430)$$

$$LL = \left(\sum_{y=0}^{nS-1} p_y'[-1, y]^2 + \sum_{x=0}^{nS-1} p_y'[x, -1]^2 \right) \gg k3 \quad (8-555530)$$

Formatted: Tab stops: Not at 0.2"

Formatted: Subscript

Formatted: Heading 5, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

Formatted: Subscript

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.55" + 0.83" + 1.1" + 1.38"

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.55" + 0.83" + 1.1" + 1.38"

Formatted: Indent: Left: 0.51", Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.79", List tab + 1", Left + 2.07", Left + Not at 0.28" + 0.55" + 0.83" + 1.1" + 1.38"

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt

HEVC

$$LC = \left(\sum_{y=0}^{nS-1} p_Y'[-1, y] * p[-1, y] + \sum_{y=0}^{nS-1} p_Y'[x, -1] * p[x, -1] \right) >> k3 \quad (8-565630)$$

Formatted: Font: 10 pt

$$k2 = \log_2(2 * nS) >> k3 \quad (8-575730)$$

Formatted: Font: 10 pt

Otherwise, if all samples $p[x, -1]$, with $x = 0..nS-1$ are marked as “not available for intra prediction” and all samples $p[-1, y]$, with $y = 0..nS-1$ are marked as “available for intra prediction” the variables L , C , LL and LC are derived as:

Formatted: Font: 10 pt, Subscript

Formatted: Font: 10 pt

Formatted: Font: 10 pt

Formatted: Font: 10 pt

$$L = \left(\sum_{y=0}^{nS-1} p_Y'[-1, y] \right) >> k3 \quad (8-30)$$

Formatted: Normal, Indent: Left: 0.51", Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.79", List tab + 1", Left + 2.07", Left + Not at 0.28" + 0.59" + 0.98"

$$C = \left(\sum_{y=0}^{nS-1} p_C[-1, y] \right) >> k3 \quad (8-30)$$

$$LL = \left(\sum_{y=0}^{nS-1} p_Y'[-1, y]^2 \right) >> k3 \quad (8-30)$$

$$LC = \left(\sum_{y=0}^{nS-1} p_Y'[-1, y] * p_C[-1, y] \right) >> k3 \quad (8-30)$$

$$k2 = \log_2(nS) >> k3 \quad (8-30)$$

Otherwise, if all samples $p[x, -1]$, with $x = 0..nS-1$ are marked as “available for intra prediction” and all samples $p[-1, y]$, with $y = 0..nS-1$ are marked as “not available for intra prediction” the variables L , C , LL and LC are derived as:

Formatted: Normal, Indent: Left: 0.51", Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.79", List tab + 1", Left + 2.07", Left + Not at 0.28" + 0.59" + 0.98"

$$L = \left(\sum_{x=0}^{nS-1} p_Y'[x, -1] \right) >> k3 \quad (8-30)$$

$$C = \left(\sum_{x=0}^{nS-1} p_C[x, -1] \right) >> k3 \quad (8-30)$$

$$LL = \left(\sum_{x=0}^{nS-1} p_Y'[x, -1]^2 \right) >> k3 \quad (8-30)$$

$$LC = \left(\sum_{x=0}^{nS-1} p_Y'[x, -1] * p_C[x, -1] \right) >> k3 \quad (8-30)$$

$$k2 = \log_2(nS) >> k3 \quad (8-30)$$

3. Variables a and b are derived as:

$$a1 = (LC << k2) - L * C \quad (8-585830)$$

$$a2 = (LL << k2) - L * L \quad (8-595930)$$

$$k = \text{Max}(0, \log_2(\text{abs}(a2)) - 5) - \text{Max}(0, \log_2(\text{abs}(a1)) - 14) + 2 \quad (8-606030)$$

$$a1s = a1 >> \text{Max}(0, \log_2(\text{abs}(a1)) - 14) \quad (8-616130)$$

$$a2s = \text{abs}(a2 >> \text{Max}(0, \log_2(\text{abs}(a2)) - 5)) + 1 \quad (8-626230)$$

[Ed. (WJ): bug in software – a2s should be $\text{abs}(a2 >> \text{Max}(0, \log_2(\text{abs}(a2)) - 5))$ – without ‘+1’]

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.55" + 0.83" + 1.1" + 1.38"

Formatted: Equation, Indent: Left: 0.59", Tab stops: 0.59", Left + 0.79", Left + 0.98", Left

Formatted: Font: 10 pt, Subscript

Formatted: Font: 10 pt, Subscript

Formatted: Font: 10 pt, Subscript

Formatted: Font: 10 pt, Subscript

Formatted: Font: 10 pt, English (United States)

HEVC

$$a = \text{Clip3}(-2^{15}, 2^{15}-1, a_{1s} * \text{ImDiv} + (1 \ll (k1-1)) \gg k1) \quad (8-636330)$$

$$b = (L - ((a * C) \gg k1) + (1 \ll ((k2-1))) \gg k2) \quad (8-646430)$$

where ImDiv is specified in Table 8-10 with the input a2s.

4. The values of the prediction samples predSamples[x, y] are derived as:

$$\text{predSamples}[x, y] = \text{Clip1}_C(((p_v'[x, y] * a) \gg 13) + b), \text{ with } x, y = 0..nS-1 \quad (8-656530)$$

Table 8-10 – Specification of ImDiv

a2s	1	2	3	4	5	6	7	8	9	10	11	12	13
ImDiv	32768	16384	10923	8192	6554	5461	4681	4096	3641	3277	2979	2731	2521
a2s	14	15	16	17	18	19	20	21	22	23	24	25	26
ImDiv	2341	2185	2048	1928	1820	1725	1638	1560	1489	1425	1365	1311	1260
a2s	27	28	29	30	31	32	33	34	35	36	37	38	39
ImDiv	1214	1170	1130	1092	1057	1024	993	964	936	910	886	862	840
a2s	40	41	42	43	44	45	46	47	48	49	50	51	52
ImDiv	819	799	780	762	745	728	712	697	683	669	655	643	630
a2s	53	54	55	56	57	58	59	60	61	62	63	64	
ImDiv	618	607	596	585	575	565	555	546	537	529	520	512	

Formatted: Font: 10 pt, Superscript

Formatted: Font: 10 pt, Superscript

Formatted: Font: 10 pt

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75", Left + 1", Left + 1.18", Left + Not at 0.55" + 0.83" + 1.1" + 1.38"

Formatted: Subscript

Formatted: Subscript

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

Formatted: Caption

Formatted: (Asian) Korean

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

Formatted: (Asian) Korean, (Other) (none)

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

8.4 Decoding process for coding units coded in inter prediction mode

Inputs to this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable log2CUSize specifying the size of the current coding unit.

Output of this process is a modified reconstructed picture before deblocking filtering.

The variable nCS_L is set equal to 1 << log2CUSize and the variable nCS_C is set equal to (1 << log2CUSize) >> 1.

Decoding process for coding units coded in inter prediction mode consists of following ordered steps:

1. The inter prediction process as specified in subclause 8.4.1 is invoked with the luma location (xC, yC), coding unit size log2CUSize, inter prediction mode **PredMode**, and prediction partition mode **PartMode** as the inputs and the outputs are 3 arrays predSamples_L, predSamples_{Cb}, predSamples_{Cr}.
2. The decoding process for the residual signal of coding units coded in inter prediction mode specified in subclause 8.4.3 is invoked with the luma location (xC, yC), the size of the current coding unit log2CUSize as inputs and the outputs are 3 arrays resSamples_L, resSamples_{Cb}, resSamples_{Cr}.
3. The residual signal accumulation process as specified in subclause **XXXX** is invoked with arrays predSamples_L, predSamples_{Cb}, predSamples_{Cr}, and the arrays resSamples_L, resSamples_{Cb}, resSamples_{Cr} as the inputs and the outputs are 3 arrays recSamples_L, recSamples_{Cb}, recSamples_{Cr}. [Ed: (WJ) it may be split per each color component. Revisit after writing residual signal accumulation process]
4. The picture reconstruction process for a component before deblocking filtering as specified in subclause **XXXX** is invoked with the luma location (xB, yB), and 3 arrays recSamples_L, recSamples_{Cb}, recSamples_{Cr} as the inputs and the output is a modified reconstructed picture before deblocking filtering. [Ed: (WJ) it may be split per each color component. Revisit after writing picture reconstruction process]

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28"

HEVC

8.4.1 Inter prediction process

This process is invoked when decoding coding unit whose PredMode is not equal to MODE_INTRA.

Inputs to this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit,
- a variable PredMode specifying prediction mode of current coding unit,
- a variable PartMode specifying prediction partition mode of current coding unit.

Outputs of this process are:

- a $(nCS_L) \times (nCS_L)$ array predSamples_L of luma prediction samples, where nCS_L is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array predSamples_{Cb} of chroma prediction samples for the component Cb, where nCS_C is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array predSamples_{Cr} of chroma prediction samples for the component Cr, where nCS_C is derived as specified below.

The variable nCS_L is set equal to $1 \ll \log2CUsSize$ and the variable nCS_C is set equal to $(1 \ll \log2CUsSize) \gg 1$. [Ed: (WJ) revisit for supporting other chroma formats]

The variable nCS_{1L} is set equal to $nCS_L \gg 1$.

Depending on PartMode, the following applies: [Ed: (WJ) is PUType better?]

- If PartMode is equal to PART_2Nx2N, the following ordered steps apply:
 1. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (0, 0), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_L , the height of the luma prediction samples $nPSH$ set equal to nCS_L and a partition index PartIdx set equal to 0 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array predSamples_L and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} .
- Otherwise, if PartMode is equal to PART_2NxN, the following ordered steps apply:
 1. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (0, 0), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_L , the height of the luma prediction samples $nPSH$ set equal to nCS_{1L} and a partition index PartIdx set equal to 0 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array predSamples_L and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} .
 2. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (0, nCS_{1L}), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_L , the height of the luma prediction samples $nPSH$ set equal to nCS_{1L} and a partition index PartIdx set equal to 1 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array predSamples_L and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} .

Otherwise, if PartMode is equal to PART_Nx2N, the following ordered steps apply:

1. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (0, 0), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction samples $nPSH$ set equal to nCS_L and a partition index PartIdx set equal to 0 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array predSamples_L and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} .
2. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (nCS_{1L} , 0), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction samples $nPSH$ set equal to nCS_L and a partition index PartIdx set equal to 1 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array predSamples_L and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} .

Otherwise, if PartMode is equal to PART_NxN, the following ordered steps apply:

1. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (x_C, y_C), the luma location (x_B, y_B) set equal to (0, 0), the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction

HEVC

samples $nPSH$ set equal to nCS_{1L} as and a partition index $PartIdx$ set equal to 0 inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array $predSamples_L$ and two $(nCS_C) \times (nCS_C)$ arrays $predSamples_{Cb}$ and $predSamples_{Cr}$.

2. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (xC, yC) , the luma location (xB, yB) set equal to $(nCS_{1L}, 0)$, the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction samples $nPSH$ set equal to nCS_{1L} and a partition index $PartIdx$ set equal to 1 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array $predSamples_L$ and two $(nCS_C) \times (nCS_C)$ arrays $predSamples_{Cb}$ and $predSamples_{Cr}$.
3. The decoding process for prediction units in inter prediction mode as specified in subclause 8.4.2 is invoked with the luma location (xC, yC) , the luma location (xB, yB) set equal to $(0, nCS_{1L})$, the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction samples $nPSH$ set equal to nCS_{1L} and a partition index $PartIdx$ set equal to 2 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array $predSamples_L$ and two $(nCS_C) \times (nCS_C)$ arrays $predSamples_{Cb}$ and $predSamples_{Cr}$.
4. The decoding process for inter prediction units as specified in subclause 8.4.2 is invoked with the luma location (xC, yC) , the luma location (xB, yB) set equal to (nCS_{1L}, nCS_{1L}) , the size of the coding unit nCS_L , the width of the luma prediction samples $nPSW$ set equal to nCS_{1L} , the height of the luma prediction samples $nPSH$ set equal to nCS_{1L} and a partition index $PartIdx$ set equal to 3 as inputs, and the outputs are a $(nCS_L) \times (nCS_L)$ array $predSamples_L$ and two $(nCS_C) \times (nCS_C)$ arrays $predSamples_{Cb}$ and $predSamples_{Cr}$.

8.4.2 Decoding process for prediction units in inter prediction mode

Inputs to this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a luma location (xB, yB) specifying the top-left luma sample of the current prediction unit relative to the top left luma sample of the current coding unit,
- a variable nCS specifying the size of the current coding unit,
- a variable $nPSW$ specifying the width of the current prediction unit,
- a variable $nPSH$ specifying the height of the current prediction unit,
- a variable $PartIdx$ specifying the index of the current prediction unit within the current coding unit.

Outputs of this process are:

- a $(nCS_L) \times (nCS_L)$ array $predSamples_L$ of luma prediction samples, where nCS_L is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array $predSamples_{Cb}$ of chroma prediction samples for the component Cb, where nCS_C is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array $predSamples_{Cr}$ of chroma prediction samples for the component Cr, where nCS_C is derived as specified below.

The variable nCS_L is set equal to nCS and the variable nCS_C is set equal to $nCS \gg 1$. [Ed: (WJ) revisit for supporting other chroma formats]

The decoding process for prediction units in inter prediction mode consists of the following ordered steps:

1. Derivation process for motion vector components and reference indices as specified in subclause 8.4.2.1.

Inputs to this process are

- a luma location (xC, yC) of the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a luma location (xB, yB) of the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current coding unit,
- variables specifying the width and the height of the prediction unit for luma, $nPSW$ and $nPSH$,
- a variable $PartIdx$ specifying the index of the current prediction unit within the current coding unit.

Outputs of this process are

- luma motion vectors $mvL0$ and $mvL1$, and chroma motion vectors $mvCL0$ and $mvCL1$,
- reference indices $refIdxL0$ and $refIdxL1$,

HEVC

- prediction list utilization flags predFlagL0 and predFlagL1.

2. Decoding process for inter sample prediction as specified in subclause 8.4.2.2.

Inputs to this process are

- a luma location (x_C , y_C) of the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a luma location (x_B , y_B) of the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current coding unit,
- a variable nCS specifying the size of the current coding unit,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH.
- luma motion vectors mvL0 and mvL1, and chroma motion vectors mvCL0 and mvCL1,
- reference indices refldxL0 and refldxL1,
- prediction list utilization flags predFlagL0 and prefflagL1.

Outputs of this process are

- inter prediction samples (predSamples); which are a $(nCS_L) \times (nCS_L)$ array predSamples_L of prediction luma samples and two $(nCS_C) \times (nCS_C)$ arrays predSamples_{Cb} and predSamples_{Cr} of prediction chroma samples, one for each of the chroma components Cb and Cr.

For use in derivation processes of variables invoked later in the decoding process, the following assignments are made:

MvL0[x_B , y_B] = mvL0	(8-666646)
MvL1[x_B , y_B] = mvL1	(8-676747)
ReflIdxL0[x_B , y_B] = reflIdxL0	(8-686848)
ReflIdxL1[x_B , y_B] = reflIdxL1	(8-696949)
PredFlagL0[x_B , y_B] = predFlagL0	(8-707050)
PredFlagL1[x_B , y_B] = predFlagL1	(8-717151)

8.4.2.1 Derivation process for motion vector components and reference indices

Input to this process are

- a luma location (x_C , y_C) of the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a luma location (x_B , y_B) of the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current coding unit,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH,
- a variable PartIdx specifying the index of the current prediction unit within the current coding unit.

Outputs of this process are

- luma motion vectors mvL0 and mvL1 and chroma motion vectors mvCL0 and mvCL1,
- reference indices refldxL0 and refldxL1,
- prediction list utilization flags predFlagL0 and predFlagL1.

Let (x_P , y_P) specify the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current picture where $x_P = x_C + x_B$ and $y_P = y_C + y_B$.

For the derivation of the variables mvL0 and mvL1, refldxL0 and refldxL1 as well as PredFlagL0 and PredFlagL1, the following applies.

- If PredMode is equal to MODE_SKIP, the derivation process for luma motion vectors for merge mode as specified in subclause 8.4.2.1.18-4.2.1.3 is invoked with the luma location (x_P , y_P), variables nPSW, nPSH and the partition index PartIdx as inputs and the output being the luma motion vectors mvL0, mvL1, the reference indices refldxL0, refldxL1, and the prediction list utilization flags predFlagL0 and predFlagL1.

HEVC

- Otherwise, if PredMode is equal to MODE_INTER and merge_flag[xP][yP] is equal to 1, the derivation process for luma motion vectors for merge mode as specified in subclause 8.4.2.1.18.4.2.1.3 is invoked with the luma location (xP, yP), variables nPSW and nPSH and the partition index PartIdx as inputs and the outputs being the luma motion vectors mvL0 and mvL1, the reference indices refIdxL0 and refIdxL1, the prediction utilization flags predFlagL0 and predFlagL1.
- Otherwise, for X being replaced by either 0 or 1 in the variables predFlagLX, mvLX, refIdxLX and in Pred_LX and in the syntax elements ref_idx_LX and mvd_LX, the following applies.

1. The variables LcToLx, refIdxLX and predFlagLX are derived as follows.

- If inter_pred_flag[xP][yP] is equal to Pred_LC and PredLCToPredLx[ref_idx_lc[xP][yP]] is equal to Pred_LX,

```

refIdxLX = RefIdxLCToRefIdxLx[ ref_idx_lc[ xP ][ yP ] ] (8-727252)
predFlagLX = 1 (8-737353)
mvd_LX[ xP ][ yP ][ 0 ] = mvd_lc[ xP ][ yP ][ 0 ] (8-747454)
mvd_LX[ xP ][ yP ][ 1 ] = mvd_lc[ xP ][ yP ][ 1 ] (8-757555)
mvp_idx_LX[ xP ][ yP ][ 0 ] = mvp_idx_lc[ xP ][ yP ] (8-767656)
LcToLx = LX (8-777757)

```

- Otherwise, if inter_pred_flag[xP][yP] is equal to Pred_LX or Pred_BI,

```

refIdxLX = ref_idx_LX[ xP ][ yP ] (8-787858)
predFlagLX = 1 (8-797959)

```

- Otherwise, the variables refIdxLX and predFlagLX are specified by

```

refIdxLX = -1 (8-808060)
predFlagLX = 0 (8-818161)

```

2. The variable mvdLX is derived as follows.

```

mvdLX[ 0 ] = mvd_LX[ xP ][ yP ][ 0 ] (8-828262)
mvdLX[ 1 ] = mvd_LX[ xP ][ yP ][ 1 ] (8-838363)

```

3. When predFlagLX is equal to 1, the variable mvpLX is derived as follows.

- The derivation process for luma motion vector prediction in subclause 8.4.2.1.38.4.2.1.5 is invoked with the luma location (xP, yP), variables nPSW and nPSH and refIdxLX as the inputs and the output being mvpLX.

4. When predFlagLX is equal to 1, the luma motion vector mvLX is derived as

```

mvLX[ 0 ] = mvpLX[ 0 ] + mvdLX[ 0 ] (8-848464)
mvLX[ 1 ] = mvpLX[ 1 ] + mvdLX[ 1 ] (8-858565)

```

When ChromaArrayType is not equal to 0 and predFlagLX (with X being either 0 or 1) is equal to 1, the derivation process for chroma motion vectors in subclause 8.4.2.1.78.4.2.1.8 is invoked with mvLX and refIdxLX as inputs and the output being mvCLX.

8.4.2.1.1 Derivation process for luma motion vectors for merge mode

This process is only invoked when PredMode is equal to MODE_INTER and merge_flag [xP][yP] is equal to 1, where (xP, yP) specify the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current picture.

Inputs of this process are

- a luma location (xP, yP) of the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH,
- a variable PartIdx specifying the index of the current prediction unit within the current coding unit.

Outputs of this process are

- the luma motion vectors mvL0 and mvL1,

Formatted: Heading 5, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

HEVC

- the reference indices `refIdxL0` and `refIdxL1`,
- the prediction list utilization flags `predFlagL0` and `predFlagL1`.

The motion vectors `mvL0` and `mvL1`, the reference indices `refIdxL0` and `refIdxL1`, and the prediction utilization flags `predFlagL0` and `predFlagL1` are derived as specified by the following ordered steps:

1. The derivation process for merging candidates from neighboring prediction unit partitions in subclause 8.4.2.1.4 is invoked with luma location (`xP`, `yP`), the width and the height of the prediction unit `nPSW` and `nPSH` and the partition index `PartIdx` as inputs and the output is assigned to the availability flags `availableFlagN`, the motion vectors `mvL0N` and `mvL1N`, the reference indices `refIdxL0N` and `refIdxL1N` and the prediction list utilization flags `predFlagL0N` and `predFlagL1N` with `N` being replaced by `A`, `B`, `C` or `D`.
2. The derivation process of reference indices for temporal merging candidate in subclause 8.4.2.1.3 is invoked with luma location (`xP`, `yP`), `nPSW`, `nPSH` as the inputs and the output is directly assigned to `refIdxLX`.
3. The derivation process for temporal luma motion vector prediction in subclause 4.8.4.2.1.7 is invoked with luma location (`xP`, `yP`), `refIdxLX` as the inputs and with the output being the availability flag `availableFlagLXCol` and the temporal motion vector `mvLXCol`. The variables `availableFlagCol` and `predFlagLXCol` (with `X` being 0 or 1, respectively) are derived as specified below.

$$\text{availableFlagCol} = \text{availableFlagL0Col} \parallel \text{availableFlagL1Col}$$

(8-868671)

$$\text{predFlagLXCol} = \text{availableFlagLXCol}$$

(8-878772)

4. The merging candidate list, `mergeCandList`, is constructed of which elements are given as specified order:
 1. `A`, if `availableFlagA` is equal to 1
 2. `B`, if `availableFlagB` is equal to 1
 3. `Col`, if `availableFlagCol` is equal to 1
 4. `C`, if `availableFlagC` is equal to 1
 5. `D`, if `availableFlagD` is equal to 1
5. If several merging candidates have the motion vectors and the same reference indices, the merging candidates are removed from the list except the merging candidate which has the smallest order in the `mergeCandList`.
6. If the number of elements `NumMergeCand` within the `mergeCandList` is equal to 1, `mergeIdx` is set equal to 0, otherwise, `mergeIdx` is set equal to `merge_idx[ xP ][ yP ]`.
7. The following assignments are made with `N` being the candidate at position `mergeIdx` in the merging candidate list `mergeCandList` (`N = mergeCandList[ mergeIdx ]`) and `X` being replaced by 0 or 1:

$$\text{mvLX}[0] = \text{mvLXN}[0]$$

(8-888873)

$$\text{mvLX}[1] = \text{mvLXN}[1]$$

(8-898974)

$$\text{refIdxLX} = \text{refIdxLXN}$$

(8-909075)

$$\text{predFlagLX} = \text{predFlagLXN}$$

(8-919176)

8. If all availability flags `availableFlagN` (with `N` being replaced by `A`, `B`, `Col`, `C`, or `D`) are equal to 0, `mergeIdx` is set equal to 0 and the variables `mvLX`, `refIdxLX` and `predFlagLX` (with `X` being replaced by 0 or 1) are inferred as follows.

If `slice_type` is equal to `P`, the following applies.

$$\text{mvLX}[0] = 0$$

(8-929277)

$$\text{mvLX}[1] = 0$$

(8-939378)

HEVC

Otherwise (slice_type is equal to B), the following applies.

```
refIdxL0 = 0
(8-949479)

refIdxL1 = -1
(8-959580)

predFlagL0 = 1
(8-969681)

prefFlagL1 = 0
(8-979782)
```

```
mvLX[ 0 ] = 0
(8-989883)

mvLX[ 1 ] = 0
(8-999984)

refIdxL0 = 0
(8-10010085)

refIdxL1 = 0
(8-10110186)

predFlagL0 = 1
(8-10210287)

prefFlagL1 = 1
(8-10310388)
```

8.4.2.1.18.4.2.1.2 Derivation process for spatial merging candidates

Inputs to this process are

- a luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH,
- a variable PartIdx specifying the index of the current prediction unit within the current coding unit.

Outputs of this process are (with N being replaced by A, B, C, or D and with X being replaced by 0 or 1)

- the availability flags availableFlagN of the neighbouring prediction units,
- the reference indices refIdxLXN of the neighbouring prediction units,
- the prediction list utilization flags predFlagLXN of the neighbouring prediction units,
- the motion vectors mvLXN of the neighbouring prediction units.

HEVC

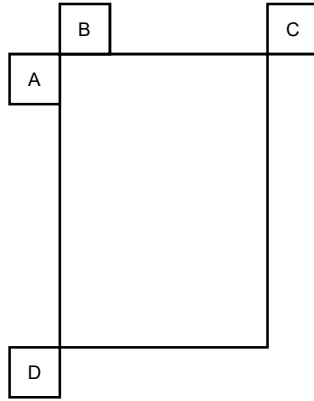


Figure 8-3 – Spatial neighbours that can be used as merging candidates (informative) illustrates the position of the spatial neighbours A, B, C and D relative to the current prediction unit.

For the derivation of availableFlagN, with N being A, B, C or D and (xN, yN) being (xP - 1, yP), (xP, yP - 1), (xP + nPSW, yP - 1) or (xP - 1, yP + nPSH) the following applies.

- If one of the following conditions is true, the availableFlagN is set equal to 0, both components mvLXN are set equal to 0, refIdxLXN and predFlagLX[xN, yN] of the prediction unit covering luma location (xN, yN) are assigned respectively to mvLXN, refIdxLXN and predFlagLXN.
 - The prediction unit covering luma location (xN, yN) is not available or PredMode is MODE_INTRA.
 - PartMode of the current prediction unit is PART_2NxN and PartIdx is equal to 1 and the prediction units covering luma location (xP, yP - 1) (PartIdx = 0) and luma location (xN, yN) (Cand. N) have identical motion parameters:
 - $mvLX[xP, yP - 1] == mvLX[xN, yN]$
 - $refIdxLX[xP, yP - 1] == refIdxLX[xN, yN]$
 - $predFlagLX[xP, yP - 1] == predFlagLX[xN, yN]$
 - PartMode of the current prediction unit is PART_Nx2N and PartIdx is equal to 1 and the prediction units covering luma location (xP - 1, yP) (PartIdx = 0) and luma location (xN, yN) (Cand. N) have identical motion parameters:
 - $mvLX[xP - 1, yP] == mvLX[xN, yN]$
 - $refIdxLX[xP - 1, yP] == refIdxLX[xN, yN]$
 - $predFlagLX[xP - 1, yP] == predFlagLX[xN, yN]$
 - PartMode of the current prediction unit is PART_NxN and PartIdx is equal to 3 and the prediction units covering luma location (xP - 1, yP) (PartIdx = 2) and luma location (xP - 1, yP - 1) (PartIdx = 0) have identical motion parameters:
 - $mvLX[xP - 1, yP] == mvLX[xP - 1, yP - 1]$
 - $refIdxLX[xP - 1, yP] == refIdxLX[xP - 1, yP - 1]$
 - $predFlagLX[xP - 1, yP] == predFlagLX[xP - 1, yP - 1]$
- and the prediction units covering luma location (xP, yP - 1) (PartIdx = 1) and luma location (xN, yN) (Cand. N) have identical motion parameters:
- $mvLX[xP, yP - 1] == mvLX[xN, yN]$
 - $refIdxLX[xP, yP - 1] == refIdxLX[xN, yN]$
 - $predFlagLX[xP, yP - 1] == predFlagLX[xN, yN]$

HEVC

- PartMode of the current prediction unit is PART_NxN and PartIdx is equal to 3 and the prediction units covering luma location (xP, yP – 1) (PartIdx = 1) and luma location (xP – 1, yP – 1) (PartIdx = 0) have identical motion parameters:
 - $mvLX[xP, yP - 1] == mvLX[xP - 1, yP - 1]$
 - $refldxLX[xP, yP - 1] == refldxLX[xP - 1, yP - 1]$
 - $predFlagLX[xP, yP - 1] == predFlagLX[xP - 1, yP - 1]$
 and the prediction units covering luma location (xP – 1, yP) (PartIdx = 2) and luma location (xN, yN) (Cand. N) have identical motion parameters:
 - $mvLX[xP - 1, yP] == mvLX[xN, yN]$
 - $refldxLX[xP - 1, yP] == refldxLX[xN, yN]$
 - $predFlagLX[xP - 1, yP] == predFlagLX[xN, yN]$
- Otherwise, availableFlagN is set equal to 1 and the variables $mvLX[xN, yN]$, $refldxLX[xN, yN]$ and $predFlagLX[xN, yN]$ of the prediction unit covering luma location (xN, yN) are assigned respectively to $mvLXN$, $refldxLXN$ and $predFlagLXN$.

8.4.2.1-28.4.2.1.3 Derivation process of reference indices for temporal merging candidate

Inputs to this process are

- a luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH.

Outputs of this process are (with X being replaced by 0 or 1)

- the reference indices $refldxLX$ of the current prediction units.

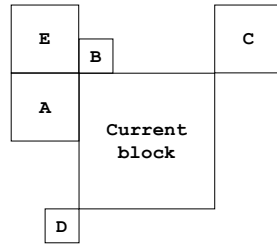


Figure 8-4 – Spatial neighbours, that can be used to derive reference indices for temporal merging candidates, (informative) illustrates the position of the spatial neighbours A, B, C, D and E relative to the current prediction unit.

For the derivation of $refldxLXA$, the following applies.

- If the prediction unit covering luma location (xP-1, yP) is available and PredMode is not MODE_INTRA, $refldxLXA$ is assigned to $refldxLX[xP-1, yP]$.
- Otherwise, $refldxLXA$ is assigned to -1.

For the derivation of $refldxLXB$, the following applies.

- If the prediction unit covering luma location (xP, yP-1) is available and PredMode is not MODE_INTRA, $refldxLXB$ is assigned to $refldxLX[xP, yP-1]$.
- Otherwise, $refldxLXB$ is assigned to -1.

For the derivation of $refldxLXC$, the following applies.

- If the prediction unit covering luma location (xP+nPSW, yP-1) is available and PredMode is not MODE_INTRA, $refldxLXC$ is assigned to $refldxLX[xP+nPSW, yP-1]$.
- Otherwise if the prediction unit covering luma location (xP-1, yP+nPSH) is available and PredMode is not MODE_INTRA, $refldxLXC$ is assigned to $refldxLX[xP-1, yP+nPSH]$.

HEVC

- Otherwise if the prediction unit covering luma location (xP-1, yP-1) is available and PredMode is not MODE_INTRA reflDxLXC is assigned to reflDxLX[xP-1, yP-1].
- Otherwise, reflDxLXC is assigned to -1.

The variable reflDxLX is derived as follows.

- If reflDxLXA is equal to reflDxLXB and reflDxLXB is equal to reflDxLXC, the following applies.
 - If reflDxLXA is equal to -1 then reflDxLX = 0
 - Otherwise reflDxLX = reflDxLXA
- Otherwise if reflDxLXA is equal to reflDxLXB, the following applies.
 - If reflDxLXA is equal to -1 then reflDxLX = reflDxLXC
 - Otherwise reflDxLX = reflDxLXA
- Otherwise if reflDxLXB is equal to reflDxLXC, the following applies.
 - If reflDxLXB is equal to -1 then reflDxLX = reflDxLXA
 - Otherwise reflDxLX = reflDxLXB
- Otherwise if reflDxLXA is equal to reflDxLXC, the following applies.
 - If reflDxLXA is equal to -1 then reflDxLX = reflDxLXB
 - Otherwise reflDxLX = reflDxLXA
- Otherwise if reflDxLXA is equal to -1, the following applies.
 - $\text{reflDxLX} = \min(\text{reflDxLXB}, \text{reflDxLXC})$
- Otherwise if reflDxLXB is equal to -1, the following applies.
 - $\text{reflDxLX} = \min(\text{reflDxLXA}, \text{reflDxLXC})$
- Otherwise if reflDxLXC is equal to -1, the following applies.
 - $\text{reflDxLX} = \min(\text{reflDxLXA}, \text{reflDxLXB})$
- Otherwise, the following applies.
 - $\text{reflDxLX} = \min(\min(\text{reflDxLXA}, \text{reflDxLXB}), \text{reflDxLXC})$

8.4.2.1.38, 4.2.1.4 Derivation process for luma motion vector prediction

Inputs to this process are

- a luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH.
- the reference index of the current prediction unit partition reflDxLX (with X being 0 or 1).

Output of this process is

- the prediction mvPLX of the motion vector mvLX (with X being 0 or 1).

The motion vector predictor mvPLX is derived in the following ordered steps.

1. The derivation process for motion vector predictor candidates from neighboring prediction unit partitions in subclause 8.4.2.1.58, 4.2.1.6 is invoked with luma location (xP, yP), the width and the height of the prediction unit nPSW and nPSH, and reflDxLX (with X being 0 or 1, respectively) as inputs and the availability flags availableFlagLXN and the motion vectors mvLXN with N being replaced by A, B as the output.
2. The derivation process for temporal luma motion vector prediction in subclause 48.4.2.1.7 is invoked with luma location (xP, yP), the width and the height of the prediction unit nPSW and nPSH, and reflDxLX (with X being 0 or 1, respectively) as the inputs and with the output being the availability flag availableFlagLXCcol and the temporal motion vector predictor mvLXCcol.
3. The motion vector predictor list, mvPLXList, is constructed of which elements are given as specified order:
 1. mvLXCcol, if availableFlagLXCcol is equal to 1

HEVC

2. $mvLXA$, if $availableFlagLXA$ is equal to 1
3. $mvLXB$, if $availableFlagLXB$ is equal to 1
4. If several motion vectors have the same value, the motion vectors are removed from the list except the motion vector which has the smallest order in the $mvListLX$.
5. If the number of elements $NumMVPCand(LX)$ within the $mvListLX$ is equal to 1, $mvIdx$ is set equal to 0, otherwise, $mvIdx$ is set equal to $mv_idx_IX[xP, yP]$.
6. The motion vector of $mvListLX[mvIdx]$ is assigned to $mvpLX$.

8.4.2.1.48.4.2.1.5 Derivation process for motion vector predictor candidates

Inputs to this process are

- a luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, $nPSW$ and $nPSH$,
- the reference index of the current prediction unit partition $refIdxLX$ (with X being 0 or 1).

Outputs of this process are (with N being replaced by A , or B)

- the motion vectors $mvLXN$ of the neighbouring prediction units,
- the availability flags $availableFlagLXN$ of the neighbouring prediction units.

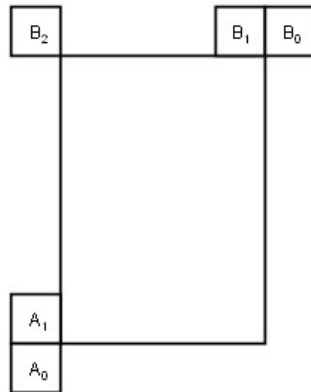


Figure 8-5 – Spatial motion vector neighbours

The function $RefPicOrderCnt(pic, refIdx, LX)$ is specified by the value of $PicOrderCnt$ of the picture that is the reference picture $RefPicListX[refIdx]$ of pic with X being 0 or 1. $PicOrderCnt$ of the reference picture shall be maintained until the picture is marked as “non-existing.”

The motion vector $mvLXA$ and the availability flag $availableFlagLXA$ are derived in the following ordered steps:

1. Let a set of two sample locations be (xA_k, yA_k) , with $k = 0 \dots 1$, specifies sample locations with $xA_k = xP - 1$, $yA_0 = yP + nPSH$ and $yA_1 = yA_0 - MinPuSize$. The set of sample locations (xA_k, yA_k) represent the sample locations immediately to the left side of the left partition boundary and its extended line. [Ed.: (WJ) $MinPuSize$ should be defined somewhere]
2. Let the availability flag $availableFlagLXA$ be initially set equal to 0 and the both components of $mvLXA$ are set equal to 0.
3. For (xA_k, yA_k) from (xA_0, yA_0) to (xA_1, yA_1) where $yA_1 = yA_0 - MinPuSize$, the following applies repeatedly until $availableFlagLXA$ is equal to 1:

HEVC

- When the prediction unit covering luma location (x_{A_k}, y_{A_k}) is available, PredMode is not MODE_INTRA, predFlagLX[x_{A_k}][y_{A_k}] is equal to 1 and the reference index reldxLX[x_{A_k}][y_{A_k}] is equal to the reference index of the current prediction unit reldxLX, availableFlagLXA is set equal to 1 and the motion vector mvLXA is set equal to the motion vector mvLX[x_{A_k}][y_{A_k}], reldxA is set equal to reldxLX[x_{A_k}][y_{A_k}] and ListA is set equal to LX.
4. When availableFlagLXA is equal to 0, for (x_{A_k}, y_{A_k}) from (x_{A_0}, y_{A_0}) to (x_{A_1}, y_{A_1}) where $y_{A_1} = y_{A_0} - \text{MinPuSize}$, the following applies repeatedly until availableFlagLXA is equal to 1:
- If the prediction unit covering luma location (x_{A_k}, y_{A_k}) is available, PredMode is not MODE_INTRA, predFlagLY[x_{A_k}][y_{A_k}] (with $Y = !X$) is equal to 1 and RefPicOrderCnt(currPic, reldxLY[x_{A_k}][y_{A_k}], LY) is equal to RefPicOrderCnt(currPic, reldxLX, LX), availableFlagLXA is set equal to 1, the motion vector mvLXA is set equal to the motion vector mvLY[x_{A_k}][y_{A_k}], reldxA is set equal to reldxLY[x_{A_k}][y_{A_k}] and ListA is set equal to LY.
 - Otherwise if the prediction unit covering luma location (x_{A_k}, y_{A_k}) is available, PredMode is not MODE_INTRA, predFlagLX[x_{A_k}][y_{A_k}] is equal to 1, availableFlagLXA is set equal to 1, the motion vector mvLXA is set equal to the motion vector mvLX[x_{A_k}][y_{A_k}], reldxA is set equal to reldxLX[x_{A_k}][y_{A_k}], ListA is set equal to LX.
 - Otherwise if the prediction unit covering luma location (x_{A_k}, y_{A_k}) is available, PredMode is not MODE_INTRA, predFlagLY[x_{A_k}][y_{A_k}] (with $Y = !X$) is equal to 1, availableFlagLXA is set equal to 1, the motion vector mvLXA is set equal to the motion vector mvLY[x_{A_k}][y_{A_k}], reldxA is set equal to reldxLY[x_{A_k}][y_{A_k}], ListA is set equal to LY.
5. When availableFlagLXA is equal to 1, the following applies.
- If RefPicOrderCnt(currPic, reldxA, ListA) is equal to RefPicOrderCnt(currPic, reldxLX, LX), mvLXA is set equal to mvLXA
 - Otherwise, mvLXA is derived as specified below

$$\begin{aligned}
 tx &= (16384 + \text{Abs}(td / 2)) / td \\
 &\quad (8-10410477) \\
 \text{DistScaleFactor} &= \text{Clip3}(-1024, 1023, (tb * tx + 32) >> 6) \\
 &\quad (8-10510577) \\
 mvLXA &= \text{ClipMv}((\text{DistScaleFactor} * mvLXA + 128) >> 8) \\
 &\quad (8-10610677)
 \end{aligned}$$

[Ed. (WJ): software has a clip function for scaled motion vector. Do we need this? AVC does not have it]

where td and tb are derived as

$$\begin{aligned}
 td &= \text{Clip3}(-128, 127, \text{PicOrderCnt}(\text{currPic}) - \text{RefPicOrderCnt}(\text{currPic}, \text{reldxA}, \text{ListA})) \\
 &\quad (8-10710777) \\
 tb &= \text{Clip3}(-128, 127, \text{PicOrderCnt}(\text{currPic}) - \text{RefPicOrderCnt}(\text{currPic}, \text{reldxLX}, \text{LX})) \\
 &\quad (8-10810877)
 \end{aligned}$$

The motion vector mvLXB and the availability flag availableFlagLXB are derived in the following ordered steps:

1. Let a set of three sample location (x_{B_k}, y_{B_k}) , with $k = 0, 1, 2$, specifies sample locations with $x_{B_0} = x_P + n\text{PSW}$, $x_{B_1} = x_{B_0} - \text{MinPuSize}$, $x_{B_2} = x_P - \text{MinPuSize}$ and $y_{B_k} = y_P - 1$. The set of sample locations (x_{B_k}, y_{B_k}) represent the sample locations immediately to the upper side of the above partition boundary and it's extended line. [Ed.: (WJ) MinPuSize should be defined somewhere]
2. Let the availability flag availableFlagLXB be initially set equal to 0 and the both components of mvLXB are set equal to 0.
3. For (x_{B_k}, y_{B_k}) from (x_{B_0}, y_{B_0}) to (x_{B_2}, y_{B_2}) where $x_{B_0} = x_P + n\text{PSW}$, $x_{B_1} = x_{B_0} - \text{MinPuSize}$, and $x_{B_2} = x_P - \text{MinPuSize}$, the following applies repeatedly until availableFlagLXB is equal to 1:
 - When the prediction unit covering luma location (x_{B_k}, y_{B_k}) is available, PredMode is not MODE_INTRA, predFlagLX[x_{B_k}][y_{B_k}] is equal to 1, and the reference index reldxLX[x_{B_k}][y_{B_k}] is equal to the reference index of the current prediction unit reldxLX and mvLX[x_{B_k}][y_{B_k}] is not identical to mvLXA, availableFlagLXB is set equal to 1 and the motion vector mvLXB is set equal to the motion vector mvLX[x_{B_k}][y_{B_k}], reldxB is set equal to reldxLX[x_{B_k}][y_{B_k}] and ListB is set equal to LX.

HEVC

4. When availableFlagLXB is equal to 0, for (xB_k, yB_k) from (xB₀, yB₀) to (xB₂, yB₂) where xB₀ = xP + nPSW, xB₁ = xB₀ - MinPuSize , and xB₂ = xP - MinPuSize, the following applies repeatedly until availableFlagLXB is equal to 1:
- If the prediction unit covering luma location (xB_k, yB_k) is available, PredMode is not MODE_INTRA, predFlagLY[xB_k][yB_k](with Y = !X) is equal to 1 and RefPicOrderCnt(currPic , refIdxLY[xB_k][yB_k], LY) is equal to RefPicOrderCnt(currPic, refIdxLX, LX), availableFlagLXB is set equal to 1, the motion vector mvLXB is set equal to the motion vector mvLY[xB_k][yB_k], refIdxB is set equal to refIdxLY[xB_k][yB_k] and ListB is set equal to LY.
 - Otherwise if the prediction unit covering luma location (xB_k, yB_k) is available, PredMode is not MODE_INTRA, predFlagLX[xB_k][yB_k] is equal to 1, availableFlagLXB is set equal to 1, the motion vector mvLXB is set equal to the motion vector mvLX[xB_k][yB_k], refIdxB is set equal to refIdxLX[xB_k][yB_k], ListB is set equal to LX.
 - Otherwise if the prediction unit covering luma location (xB_k, yB_k) is available, PredMode is not MODE_INTRA, predFlagLY[xB_k][yB_k](with Y = !X) is equal to 1, availableFlagLXB is set equal to 1, the motion vector mvLXB is set equal to the motion vector mvLY[xB_k][yB_k], refIdxB is set equal to refIdxLY[xB_k][yB_k], ListB is set equal to LY.
 - If availableFlagLXB is equal to 1 and RefPicOrderCnt(currPic , refIdxB, ListB) is equal to RefPicOrderCnt(currPic, refIdxLX, LX), mvLXB is set equal to mvLXB.
 - Otherwise if availableFlagLXB is equal to 1 and RefPicOrderCnt(currPic , refIdxB, ListB) is not equal to RefPicOrderCnt(currPic, refIdxLX, LX), mvLXB is derived as specified below.

$$tx = (16384 + Abs(td / 2)) / td$$

$$DistScaleFactor = Clip3(-1024, 1023, (tb * tx + 32) >> 6)$$

$$mvLXB = ClipMv((DistScaleFactor * mvLXB + 128) >> 8)$$

[Ed. (WJ): software has a clip function for scaled motion vector. Do we need this? AVC does not have it]

where td and tb are derived as

$$td = Clip3(-128, 127, PicOrderCnt(currPic) - RefPicOrderCnt(currPic , refIdxB, ListB))$$

$$tb = Clip3(-128, 127, PicOrderCnt(currPic) - RefPicOrderCnt(currPic, refIdxLX, LX))$$

- When availableFlagLXB is equal to 1 and mvLXB is identical to mvLXA, availableFlagLXB is set equal to 0.

8.4.2.1.58.4.2.1.6 Derivation process for temporal luma motion vector prediction

Inputs to this process are

- a luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture,
- variables specifying the width and the height of the prediction unit for luma, nPSW and nPSH,
- the reference index of the current prediction unit partition refIdxLX (with X being 0 or 1).

Outputs of this process are

- the motion vector prediction mvLXCol,
- the availability flag availableFlagLXCol.

The function RefPicOrderCnt(pic, refIdx, LX) is specified by the value of PicOrderCnt of the picture that is the reference picture RefPicListX[refIdx] of pic with X being 0 or 1. PicOrderCnt of the reference picture shall be maintained until the picture is marked as “non-existing.”

Depending on the values of slice_type and collocated_from_10_flag, the variable colPic, specifying the picture that contains the co-located partition, is derived as follows.

HEVC

- If slice_type is equal to B and collocated_from_l0_flag is equal to 0, the variable colPic specifies the picture that contains the co-located partition as specified by RefPicList1[0].
- Otherwise (slice_type is equal to B and collocated_from_l0_flag is equal to 1 or slice_type is equal to P) , the variable colPic specifies the picture that contains the co-located partition as specified by RefPicList0[0].

Variable colPu and its position (xPCol, yPCol) are derived in the following ordered steps:

1. Right-bottom luma position of the current prediction unit is defined by

$$\begin{aligned} \text{xPRb} &= \text{xP} + \text{nPSW} \\ &\quad (8-114+1477) \end{aligned}$$

$$\begin{aligned} \text{yPRb} &= \text{yP} + \text{nPSH} \\ &\quad (8-115+1577) \end{aligned}$$

2. The variable colPu is set as the prediction unit covering the modified position given by ((xPRb >> 4) << 4, (yPRb >> 4) << 4) inside the colPic.
3. If colPu is coded in an intra prediction mode or colPu is unavailable, the following applies.
 - Central luma position of the current prediction unit is defined by

$$\begin{aligned} \text{xPCtr} &= (\text{xP} + (\text{nPSW} >> 1)) - 1 \\ &\quad (8-116+1677) \end{aligned}$$

$$\begin{aligned} \text{yPCtr} &= (\text{yP} + (\text{nPSH} >> 1)) - 1 \\ &\quad (8-117+1778) \end{aligned}$$

- The variable colPu is set as the prediction unit covering the modified position given by ((xPCtr >> 4) << 4, (yPCtr >> 4) << 4) inside the colPic.
4. (xPCol, yPCol) is set equal to the top-left luma sample of the colPu relative to the top-left luma sample of the colPic.

The variables mvLXCol and availableFlagLXCol are derived as follows.

- If colPu is coded in an intra prediction mode or colPu is unavailable, both components of mvLXCol are set equal to 0 and availableFlagLXCol is set equal to 0.
- Otherwise (colPu is not coded in an intra prediction mode and colPu is available), the variables mvCol and refIdxCol are derived as follows,
- If PredFlagL0[xPCol][yPCol] is equal to 0, the motion vector mvCol and the reference index refIdxCol are set equal to MvL1[xPCol][yPCol] and RefIdxL1[xPCol][yPCol], respectively.
- Otherwise (PredFlagL0[xPCol][yPCol] is equal to 1), the following applies.
 - If PredFlagL1[xPCol][yPCol] is equal to 0, the motion vector mvCol and the reference index refIdxCol are set equal to MvL0[xPCol][yPCol] and RefIdxL0[xPCol][yPCol], respectively.
 - Otherwise (PredFlagL1[xPCol][yPCol] is equal to 1), the following applies.
 - a. The following assignments are made with X being 0 or 1.
 - RefIdxColLX = RefIdxLX[xPCol][yPCol]
 - If PicOrderCnt(colPic) is less than PicOrderCnt(currPic) and RefPicOrderCnt(colPic, RefIdxColLX, LX) is greater than PicOrderCnt(currPic) or PicOrderCnt(colPic) is greater than PicOrderCnt(currPic) and RefPicOrderCnt(colPic, RefIdxColLX, LX) is less than PicOrderCnt(currPic), the variable MvXCross is derived as follows.
 - MvXCross = 1
 - Otherwise (PicOrderCnt(colPic) is less than PicOrderCnt(currPic) and RefPicOrderCnt(colPic, RefIdxColLX, LX) is less than or equal to PicOrderCnt(currPic) or PicOrderCnt(colPic) is greater than PicOrderCnt(currPic) and RefPicOrderCnt(colPic, RefIdxColLX, LX) is greater than or equal to PicOrderCnt(currPic)), the variable MvXCross is derived as follows.
 - MvXCross = 0

HEVC

- b. If one of the following conditions is true, the motion vector mvCol, the reference index refIdxCol and ListCol are set equal to MvL1[xPCol][yPCol], RefIdxColL1 and L1, respectively.
 - Mv0Cross is equal to 0 and Mv1Cross is equal to 1
 - Mv0Cross is equal to Mv1Cross and reference index list is equal to L1
- c. Otherwise, the motion vector mvCol, the reference index refIdxCol and ListCol are set equal to MvL0[xPCol][yPCol], RefIdxColL0 and L0, respectively.

and the variable availableFlagLXCol is set equal to 1 and the following applies.

- If PicOrderCnt(colPic) – RefPicOrderCnt(colPic, refIdxCol, ListCol) is equal to PicOrderCnt(currPic) – RefPicOrderCnt(currPic, refIdxLX, LX),

$$\text{mvLXCol} = \text{mvCol} \quad (8-118+1879)$$

- Otherwise, mvLXCol is derived as scaled version of the motion vector mvCol as specified below

$$\text{tx} = (16384 + \text{Abs}(\text{td} / 2)) / \text{td} \quad (8-119+1984)$$

$$\text{DistScaleFactor} = \text{Clip3}(-1024, 1023, (\text{tb} * \text{tx} + 32) >> 6) \quad (8-120+2084)$$

$$\text{mvLXCol} = \text{ClipMv}((\text{DistScaleFactor} * \text{mvCol} + 128) >> 8) \quad (8-121+2182)$$

[Ed. (WJ): software has a clip function for scaled motion vector. Do we need this? AVC does not have it]

where td and tb are derived as

$$\text{td} = \text{Clip3}(-128, 127, \text{PicOrderCnt}(\text{colPic}) - \text{RefPicOrderCnt}(\text{colPic}, \text{refIdxCol}, \text{ListCol})) \quad (8-122+2283)$$

$$\text{tb} = \text{Clip3}(-128, 127, \text{PicOrderCnt}(\text{currPic}) - \text{RefPicOrderCnt}(\text{currPic}, \text{refIdxLX}, \text{LX})) \quad (8-123+2384)$$

8.4.2.1.68.4.2.1.7 Derivation process for chroma motion vectors

[Ed.: (WJ) 4:2:0 assumption yet]

Inputs to this process are a luma motion vector mvLX and a reference index refIdxLX.

Output of this process is a chroma motion vector mvCLX.

A chroma motion vector is derived from the corresponding luma motion vector.

For the derivation of the chroma motion vector mvCLX, the following applies.

$$\text{mvCLX}[0] = \text{mvLX}[0] \quad (8-124+2483)$$

$$\text{mvCLX}[1] = \text{mvLX}[1] \quad (8-125+2586)$$

8.4.2.2 Decoding process for inter prediction samples

Inputs to this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a luma location (xB, yB) specifying the top-left luma sample of the current prediction unit relative to the top-left luma sample of the current coding unit,
- a variable nCS specifying the size of the current coding unit,
- variables specifying the width and the height of the prediction unit, nPSW and nPSH,
- luma motion vectors mvL0 and mvL1, and chroma motion vectors mvCL0 and mvCL1,
- reference indices refIdxL0 and refIdxL1,
- prediction list utilization flags, predFlagL0 and predFlagL1.

HEVC

Outputs of this process are:

- a $(nCS_L) \times (nCS_L)$ array predSamples_L of luma prediction samples, where nCS_L is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array preSamples_{Cb} of chroma prediction samples for the component Cb, where nCS_C is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array predSamples_{Cr} of chroma residual samples for the component Cr, where nCS_C is derived as specified below.

The variable nCS_L is set equal to nCS and the variable nCS_C is set equal to $nCS \gg 1$. [Ed: (WJ) revisit for supporting other chroma formats]

Let predSamplesL0_L and predSamplesL1_L be $(nPSW) \times (nPSH)$ arrays of predicted luma sample values and predSampleL0_{Cb} , predSampleL1_{Cb} , predSampleL0_{Cr} , and predSampleL1_{Cr} be $(nPSW/2) \times (nPSH/2)$ arrays of predicted chroma sample values.

For LX being replaced by either L0 or L1 in the variables predFlagLX , RefPicListX , refIdxLX , refPicLX , and predPartLX , the following is specified.

When predFlagLX is equal to 1, the following applies.

- The reference picture consisting of an ordered two-dimensional array refPicLXL of luma samples and two ordered two-dimensional arrays refPicLXCb and refPicLXCr of chroma samples is derived by invoking the process specified in subclause 8.4.2.2.1 with refIdxLX and RefPicListX given as input.
- The arrays predSamplesLXL , predSamplesLXCb , and predSamplesLXCr are derived by invoking the fractional sample interpolation process specified in subclause 8.4.2.2.2 with the luma locations (x_C, y_C) , (x_B, y_B) , the width and the height of the current prediction unit $nPSW$, $nPSH$, the motion vectors mvLX , mvCLX , and the reference arrays with refPicLXL , refPicLXCb and refPicLXCr given as input.

The array predSample_L of the prediction samples of luma component is derived by invoking the weighted sample prediction process specified in subclause 8.4.2.2.3 with the luma location (x_B, y_B) , the width and the height of the current prediction unit $nPSW$, $nPSH$, and the sample arrays predSamplesL0_L and predSamplesL1_L as well as predFlagL0 , predFlagL1 and BitDepth_Y given as input.

For C being replaced by Cb, or Cr, the array predSample_C of the prediction samples of component C is derived by invoking the weighted sample prediction process specified in subclause 8.4.2.2.3 with the chroma location $(x_B/2, y_B/2)$, the width and the height of the current prediction unit $nPSW_C$ set equal to $nPSW/2$, $nPSH_C$ set equal to $nPSH/2$, and the sample arrays predSamplesL0_C and predSamplesL1_C as well as predFlagL0 , predFlagL1 and BitDepth_C given as input.

8.4.2.2.1 Reference picture selection process

[Ed: (WJ) same as AVC]

8.4.2.2.2 Fractional sample interpolation process

Inputs to this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a luma location (x_B, y_B) specifying the top-left luma sample of the current prediction unit relative to the top left luma sample of the current coding unit,
- the width and height of this prediction unit, $nPSW$ and $nPSH$, in luma-sample units,
- a luma motion vector mvLX given in quarter-luma-sample units,
- a chroma motion vector mvCLX given in eighth-chroma-sample units,
- the selected reference picture sample arrays refPicLXL , refPicLXCb , and refPicLXCr .

Outputs of this process are:

- a $(nPSW) \times (nPSH)$ array predSampleLXL of prediction luma sample values,
- two $(nPSW/2) \times (nPSH/2)$ arrays predSampleLXCb , and predSampleLXCr of prediction chroma sample values.

The location (x_P, y_P) given in full-sample units of the upper-left luma samples of the current prediction unit relative to the upper-left luma sample location of the given reference sample arrays is derived by

HEVC

$$\begin{aligned} xP &= xC + xB & (8-126+2687) \\ yP &= yC + yB & (8-127+2788) \end{aligned}$$

Let (x_{IntL} , y_{IntL}) be a luma location given in full-sample units and (x_{FracL} , y_{FracL}) be an offset given in quarter-sample units. These variables are used only inside this subclause for specifying general fractional-sample locations inside the reference sample arrays $refPicLX_L$, $refPicLX_{Cb}$, and $refPicLX_{Cr}$.

For each luma sample location ($0 \leq x_L < nPSW$, $0 \leq y_L < nPSH$) inside the prediction luma sample array $predSampleLX_L$, the corresponding prediction luma sample value $predSampleLX_L[x_L, y_L]$ is derived as follows:

- The variables x_{IntL} , y_{IntL} , x_{FracL} , and y_{FracL} are derived by

$$\begin{aligned} x_{IntL} &= xP + (mvLX[0] \gg 2) + x_L & (8-128+2889) \\ y_{IntL} &= yP + (mvLX[1] \gg 2) + y_L & (8-129+2990) \\ x_{FracL} &= mvLX[0] \& 3 & (8-130+3091) \\ y_{FracL} &= mvLX[1] \& 3 & (8-131+3192) \end{aligned}$$

- The prediction luma sample value $predSampleLX_L[x_L, y_L]$ is derived by invoking the process specified in subclause 8.4.2.2.2.1 with (x_{IntL} , y_{IntL}), (x_{FracL} , y_{FracL}) and $refPicLX_L$ given as input.

Let (x_{IntC} , y_{IntC}) be a chroma location given in full-sample units and (x_{FracC} , y_{FracC}) be an offset given in one-eighth sample units. These variables are used only inside this subclause for specifying general fractional-sample locations inside the reference sample arrays $refPicLX_{Cb}$ and $refPicLX_{Cr}$.

For each chroma sample location ($0 \leq x_C < nPSW/2$, $0 \leq y_C < nPSH/2$) inside the prediction chroma sample arrays $predSampleLX_{Cb}$ and $predSampleLX_{Cr}$, the corresponding prediction chroma sample values $predSampleLX_{Cb}[x_C, y_C]$ and $predSampleLX_{Cr}[x_C, y_C]$ are derived as follows:

- The variables x_{IntC} , y_{IntC} , x_{FracC} , and y_{FracC} are derived by

$$\begin{aligned} x_{IntC} &= (xP / 2) + (mvCLX[0] \gg 3) + x_C & (8-132+3293) \\ y_{IntC} &= (yP / 2) + (mvCLX[1] \gg 3) + y_C & (8-133+3394) \\ x_{FracC} &= mvLX[0] \& 7 & (8-134+3495) \\ y_{FracC} &= mvLX[1] \& 7 & (8-135+3596) \end{aligned}$$

- The prediction sample value $predSampleLX_{Cb}[x_C, y_C]$ is derived by invoking the process specified in subclause 8.4.2.2.2.2 with (x_{IntC} , y_{IntC}), (x_{FracC} , y_{FracC}) and $refPicLX_{Cb}$ given as input.
- The prediction sample value $predSampleLX_{Cr}[x_C, y_C]$ is derived by invoking the process specified in subclause 8.4.2.2.2.2 with (x_{IntC} , y_{IntC}), (x_{FracC} , y_{FracC}) and $refPicLX_{Cr}$ given as input.

8.4.2.2.2.1 Luma sample interpolation process

Inputs to this process are:

- a luma location in full-sample units (x_{IntL} , y_{IntL}),
- a luma location in fractional-sample units (x_{FracL} , y_{FracL}),
- the luma reference sample array $refPicLX_L$.

Output of this process is a predicted luma sample value $predSampleLX_L[x_L, y_L]$

HEVC

$A_{-1,-1}$				$A_{0,-1}$	$a_{0,-1}$	$b_{0,-1}$	$c_{0,-1}$	$A_{1,-1}$				$A_{2,-1}$
$A_{-1,0}$				$A_{0,0}$	$a_{0,0}$	$b_{0,0}$	$c_{0,0}$	$A_{1,0}$				$A_{2,0}$
$d_{-1,0}$				$d_{0,0}$	$e_{0,0}$	$f_{0,0}$	$g_{0,0}$	$d_{1,0}$				$d_{2,0}$
$h_{-1,0}$				$h_{0,0}$	$i_{0,0}$	$j_{0,0}$	$k_{0,0}$	$h_{1,0}$				$h_{2,0}$
$n_{-1,0}$				$n_{0,0}$	$p_{0,0}$	$q_{0,0}$	$r_{0,0}$	$n_{1,0}$				$n_{2,0}$
$A_{-1,1}$				$A_{0,1}$	$a_{0,1}$	$b_{0,1}$	$c_{0,1}$	$A_{1,1}$				$A_{2,1}$
$A_{-1,2}$				$A_{0,2}$	$a_{0,2}$	$b_{0,2}$	$c_{0,2}$	$A_{1,2}$				$A_{2,2}$

Figure 8-6 – Integer samples (shaded blocks with upper-case letters) and fractional sample positions (un-shaded blocks with lower-case letters) for quarter sample luma interpolation

In [Figure 8-5](#), the positions labelled with upper-case letters $A_{i,j}$ within shaded blocks represent luma samples at full-sample locations inside the given two-dimensional array refPicLXL of luma samples. These samples may be used for generating the predicted luma sample value $\text{predSampleLXL}[x_L, y_L]$. The locations $(x_{A_{i,j}}, y_{A_{i,j}})$ for each of the corresponding luma samples $A_{i,j}$ inside the given array refPicLXL of luma samples are derived as follows:

$$\begin{aligned} x_{A_{i,j}} &= \text{Clip3}(0, \text{PicWidthInSamples}_L - 1, x_{\text{IntL}} + i) & (8-13613697) \\ y_{A_{i,j}} &= \text{Clip3}(0, \text{PicHeightInSamples}_L - 1, y_{\text{IntL}} + j) & (8-13713798) \end{aligned}$$

Variables shift1 , shift2 , shift3 , offset1 and offset2 are derived as follows.

- The variable shift1 is set equal to $\text{BitDepth}_Y - 8$, the variable shift2 is set equal to $\text{BitDepth}_Y - 2$, and the variable shift3 is set equal to $14 - \text{BitDepth}_Y$.
- If the variable shift1 is equal to 0, the variable offset1 is set equal to 0, otherwise, the variable offset1 is set equal to $1 \ll (\text{shift1} - 1)$.
- The variable offset2 is set equal to $1 \ll (\text{shift2} - 1)$.

Given the luma samples $A_{i,j}$ at full-sample locations $(x_{A_{i,j}}, y_{A_{i,j}})$, the luma samples ' $a_{0,0}$ ' to ' $r_{0,0}$ ' at fractional sample positions are derived by the following rules.

- The samples labelled $a_{0,0}$, $b_{0,0}$, $c_{0,0}$, $d_{0,0}$, $h_{0,0}$, and $n_{0,0}$ shall be derived by applying the 8-tap filter to the nearest integer position samples and clipping the filtered value:

$$a_{0,0} = (-A_{-3,0} + 4*A_{-2,0} - 10*A_{-1,0} + 57*A_{0,0} + 19*A_{1,0} - 7*A_{2,0} + 3*A_{3,0} - A_{4,0} + \text{offset1}) \gg \text{shift1} \quad (8-13813899)$$

$$b_{0,0} = (-A_{-3,0} + 4*A_{-2,0} - 11*A_{-1,0} + 40*A_{0,0} + 40*A_{1,0} - 11*A_{2,0} + 4*A_{3,0} - A_{4,0} + \text{offset1}) \gg \text{shift1} \quad (8-139139100)$$

$$c_{0,0} = (-A_{-3,0} + 3*A_{-2,0} - 7*A_{-1,0} + 19*A_{0,0} + 57*A_{1,0} - 10*A_{2,0} + 4*A_{3,0} - A_{4,0} + \text{offset1}) \gg \text{shift1} \quad (8-140140101)$$

HEVC

$$d_{0,0} = (-A_{0,-3} + 4*A_{0,-2} - 10*A_{0,-1} + 57*A_{0,0} + 19*A_{0,1} - 7*A_{0,2} + 3*A_{0,3} - A_{0,4} + \text{offset1}) \gg \text{shift1} \quad (8-141141102)$$

$$h_{0,0} = (-A_{0,-3} + 4*A_{0,-2} - 11*A_{0,-1} + 40*A_{0,0} + 40*A_{0,1} - 11*A_{0,2} + 4*A_{0,3} - A_{0,4} + \text{offset1}) \gg \text{shift1} \quad (8-142142103)$$

$$n_{0,0} = (-A_{0,-3} + 3*A_{0,-2} - 7*A_{0,-1} + 19*A_{0,0} + 57*A_{0,1} - 10*A_{0,2} + 4*A_{0,3} - A_{0,4} + \text{offset1}) \gg \text{shift1} \quad (8-143143104)$$

– The samples labelled $e_{0,0}$, $f_{0,0}$, $g_{0,0}$, $i_{0,0}$, $j_{0,0}$, $k_{0,0}$, $p_{0,0}$, $q_{0,0}$ and $r_{0,0}$ shall be derived by first calculating intermediate values denoted as $d_{1,i,0}$, $h_{1,i,0}$ and $n_{1,i,0}$ where $i = -3..4$ by applying the 8-tap filter to the nearest integer position samples in vertical direction: [Ed: (WJ) horizontal first yields the same result]

$$d_{1,i,0} = -A_{i,-3} + 4*A_{i,-2} - 10*A_{i,-1} + 57*A_{i,0} + 19*A_{i,1} - 7*A_{i,2} + 3*A_{i,3} - A_{i,4} \quad (8-144144105)$$

$$h_{1,i,0} = -A_{i,-3} + 4*A_{i,-2} - 11*A_{i,-1} + 40*A_{i,0} + 40*A_{i,1} - 11*A_{i,2} + 4*A_{i,3} - A_{i,4} \quad (8-145145106)$$

$$n_{1,i,0} = -A_{i,-3} + 3*A_{i,-2} - 7*A_{i,-1} + 19*A_{i,0} + 57*A_{i,1} - 10*A_{i,2} + 4*A_{i,3} - A_{i,4} \quad (8-146146107)$$

– The final prediction values $e_{0,0}$, $f_{0,0}$, $g_{0,0}$, $i_{0,0}$, $j_{0,0}$, $k_{0,0}$, $p_{0,0}$, $q_{0,0}$ and $r_{0,0}$ shall be derived by applying the 8-tap filter to the intermediate values $d_{1,i,0}$, $h_{1,i,0}$ and $n_{1,i,0}$ where $i = -3..4$ in horizontal direction:

$$e_{0,0} = (-d_{1,-3,0} + 4*d_{1,-2,0} - 10*d_{1,-1,0} + 57*d_{1,0,0} + 19*d_{1,1,0} - 7*d_{1,2,0} + 3*d_{1,3,0} - d_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-147147108)$$

$$f_{0,0} = (-d_{1,-3,0} + 4*d_{1,-2,0} - 11*d_{1,-1,0} + 40*d_{1,0,0} + 40*d_{1,1,0} - 11*d_{1,2,0} + 4*d_{1,3,0} - d_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-148148109)$$

$$g_{0,0} = (-d_{1,-3,0} + 3*d_{1,-2,0} - 7*d_{1,-1,0} + 19*d_{1,0,0} + 57*d_{1,1,0} - 10*d_{1,2,0} + 4*d_{1,3,0} - d_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-149149110)$$

$$i_{0,0} = (-h_{1,-3,0} + 4*h_{1,-2,0} - 10*h_{1,-1,0} + 57*h_{1,0,0} + 19*h_{1,1,0} - 7*h_{1,2,0} + 3*h_{1,3,0} - h_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-150150111)$$

$$j_{0,0} = (-h_{1,-3,0} + 4*h_{1,-2,0} - 11*h_{1,-1,0} + 40*h_{1,0,0} + 40*h_{1,1,0} - 11*h_{1,2,0} + 4*h_{1,3,0} - h_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-151151112)$$

$$k_{0,0} = (-h_{1,-3,0} + 3*h_{1,-2,0} - 7*h_{1,-1,0} + 19*h_{1,0,0} + 57*h_{1,1,0} - 10*h_{1,2,0} + 4*h_{1,3,0} - h_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-152152113)$$

$$p_{0,0} = (-n_{1,-3,0} + 4*n_{1,-2,0} - 10*n_{1,-1,0} + 57*n_{1,0,0} + 19*n_{1,1,0} - 7*n_{1,2,0} + 3*n_{1,3,0} - n_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-153153114)$$

$$q_{0,0} = (-n_{1,-3,0} + 4*n_{1,-2,0} - 11*n_{1,-1,0} + 40*n_{1,0,0} + 40*n_{1,1,0} - 11*n_{1,2,0} + 4*n_{1,3,0} - n_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-154154115)$$

$$r_{0,0} = (-n_{1,-3,0} + 3*n_{1,-2,0} - 7*n_{1,-1,0} + 19*n_{1,0,0} + 57*n_{1,1,0} - 10*n_{1,2,0} + 4*n_{1,3,0} - n_{1,4,0} + \text{offset2}) \gg \text{shift2} \quad (8-155155116)$$

The positions labelled with lower-case letters within un-shaded blocks represent luma samples at quarter-pel sample fractional locations. The luma location offset in fractional-sample units (x_{FracL} , y_{FracL}) specifies which of the generated luma samples at full-sample and fractional-sample locations is assigned to the predicted luma sample value $\text{predSampleLXL}[x_L, y_L]$. This assignment is done according to [Table 8-11](#) [Table 8-9](#). The value of $\text{predSampleLXL}[x_L, y_L]$ shall be the output.

Table 8-118-98-9 – Assignment of the luma prediction sample $\text{predSampleLXL}[x_L, y_L]$

xFracL	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3
yFracL	0	1	2	3	0	1	2	3	0	1	2	3	0	1	2	3
predSampleLXL[x_L, y_L]	A << shift3	d	h	n	a	e	i	p	b	f	j	q	c	g	k	r

8.4.2.2.2.2 Chroma sample interpolation process

Inputs to this process are:

HEVC

- a chroma location in full-sample units (x_{IntC} , y_{IntC}),
- a chroma location in fractional-sample units (x_{FracC} , y_{FracC}),
- the chroma reference sample array $refPicLXC$.

Output of this process is a predicted chroma sample value $predSampleLXC[x_C, y_C]$

	$ha_{0,-1}$	$hb_{0,-1}$	$hc_{0,-1}$	$hd_{0,-1}$	$he_{0,-1}$	$hf_{0,-1}$	$hg_{0,-1}$	$hh_{0,-1}$	
$ah_{-1,0}$	$B_{0,0}$	$ab_{0,0}$	$ac_{0,0}$	$ad_{0,0}$	$ae_{0,0}$	$af_{0,0}$	$ag_{0,0}$	$ah_{0,0}$	$B_{1,0}$
$bh_{-1,0}$	$ba_{0,0}$	$bb_{0,0}$	$bc_{0,0}$	$bd_{0,0}$	$be_{0,0}$	$bf_{0,0}$	$bg_{0,0}$	$bh_{0,0}$	$ba_{1,0}$
$ch_{-1,0}$	$ca_{0,0}$	$cb_{0,0}$	$cc_{0,0}$	$cd_{0,0}$	$ce_{0,0}$	$cf_{0,0}$	$cg_{0,0}$	$ch_{0,0}$	$ca_{1,0}$
$dh_{-1,0}$	$da_{0,0}$	$db_{0,0}$	$dc_{0,0}$	$dd_{0,0}$	$de_{0,0}$	$df_{0,0}$	$dg_{0,0}$	$dh_{0,0}$	$da_{1,0}$
$eh_{-1,0}$	$ea_{0,0}$	$eb_{0,0}$	$ec_{0,0}$	$ed_{0,0}$	$ee_{0,0}$	$ef_{0,0}$	$eg_{0,0}$	$eh_{0,0}$	$ea_{1,0}$
$fh_{-1,0}$	$fa_{0,0}$	$fb_{0,0}$	$fc_{0,0}$	$fd_{0,0}$	$fe_{0,0}$	$ff_{0,0}$	$fg_{0,0}$	$fh_{0,0}$	$fa_{1,0}$
$gh_{-1,0}$	$ga_{0,0}$	$gb_{0,0}$	$gc_{0,0}$	$gd_{0,0}$	$ge_{0,0}$	$gf_{0,0}$	$gg_{0,0}$	$gh_{0,0}$	$ga_{1,0}$
$hh_{-1,0}$	$ha_{0,0}$	$hb_{0,0}$	$hc_{0,0}$	$hd_{0,0}$	$he_{0,0}$	$hf_{0,0}$	$hg_{0,0}$	$hh_{0,0}$	$ha_{1,0}$
	$B_{0,1}$	$ab_{0,1}$	$ac_{0,1}$	$ad_{0,1}$	$ae_{0,1}$	$af_{0,1}$	$ag_{0,1}$	$ah_{0,1}$	$B_{1,1}$

Figure 8-7 – Integer samples (shaded blocks with upper-case letters) and fractional sample positions (un-shaded blocks with lower-case letters) for eighth sample chroma interpolation

In [Figure 8-6](#)[Figure 8-5](#), the positions labelled with upper-case letters $B_{i,j}$ within shaded blocks represent chroma samples at full-sample locations inside the given two-dimensional array $refPicLXC$ of chroma samples. These samples may be used for generating the predicted chroma sample value $predSampleLXC[x_C, y_C]$. The locations ($xB_{i,j}$, $yB_{i,j}$) for each of the corresponding chroma samples $B_{i,j}$ inside the given array $refPicLXC$ of chroma samples are derived as follows:

$$\begin{aligned} xB_{i,j} &= \text{Clip3}(0, \text{PicWidthInSamples}_C - 1, x_{IntC} + i) & (8-156+56+17) \\ yB_{i,j} &= \text{Clip3}(0, \text{PicHeightInSamples}_C - 1, y_{IntC} + j) & (8-157+57+18) \end{aligned}$$

Variables $shift1$, $shift2$, $shift3$, $offset1$ and $offset2$ are derived as follows.

- The variable $shift1$ is set equal to $\text{BitDepth}_C - 8$, the variable $shift2$ is set equal to $\text{BitDepth}_C - 2$, and the variable $shift3$ is set equal to $14 - \text{BitDepth}_C$.
- If the variable $shift1$ is equal to 0, the variable $offset1$ is set equal to 0, otherwise, the variable $offset1$ is set equal to $1 \ll (shift1 - 1)$.
- The variable $offset2$ is set equal to $1 \ll (shift2 - 1)$.

Given the chroma samples $B_{i,j}$ at full-sample locations ($xB_{i,j}$, $yB_{i,j}$), the chroma samples ‘ $ab_{0,0}$ ’ to ‘ $hh_{0,0}$ ’ at fractional sample positions are derived by the following rules.

- The samples labelled $ab_{0,0}$, $ac_{0,0}$, $ad_{0,0}$, $ae_{0,0}$, $af_{0,0}$, $ag_{0,0}$, and $ah_{0,0}$ shall be derived by applying the 4-tap filter to the nearest integer position samples and clipping the filtered value:

HEVC

- $$ab_{0,0} = (-3*B_{-1,0} + 60*B_{0,0} + 8*B_{1,0} - B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-158158119)$$
- $$ac_{0,0} = (-4*B_{-1,0} + 54*B_{0,0} + 16*B_{1,0} - 2*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-159159120)$$
- $$ad_{0,0} = (-5*B_{-1,0} + 46*B_{0,0} + 27*B_{1,0} - 4*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-160160121)$$
- $$ae_{0,0} = (-4*B_{-1,0} + 36*B_{0,0} + 36*B_{1,0} - 4*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-161161122)$$
- $$af_{0,0} = (-4*B_{-1,0} + 27*B_{0,0} + 46*B_{1,0} - 5*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-162162123)$$
- $$ag_{0,0} = (-2*B_{-1,0} + 16*B_{0,0} + 54*B_{1,0} - 4*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-163163124)$$
- $$ah_{0,0} = (-B_{-1,0} + 8*B_{0,0} + 60*B_{1,0} - 3*B_{2,0} + \text{offset1}) \gg \text{shift1} \quad (8-164164125)$$
- The samples labelled $ba_{0,0}$, $ca_{0,0}$, $da_{0,0}$, $ea_{0,0}$, $fa_{0,0}$, $ga_{0,0}$, and $ha_{0,0}$ shall be derived by applying the 4-tap filter to the nearest integer position samples and clipping the filtered value:
- $$ba_{0,0} = (-3*B_{0,-1} + 60*B_{0,0} + 8*B_{0,1} - B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-165165126)$$
- $$ca_{0,0} = (-4*B_{0,-1} + 54*B_{0,0} + 16*B_{0,1} - 2*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-166166127)$$
- $$da_{0,0} = (-5*B_{0,-1} + 46*B_{0,0} + 27*B_{0,1} - 4*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-167167128)$$
- $$ea_{0,0} = (-4*B_{0,-1} + 36*B_{0,0} + 36*B_{0,1} - 4*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-168168129)$$
- $$fa_{0,0} = (-4*B_{0,-1} + 27*B_{0,0} + 46*B_{0,1} - 5*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-169169130)$$
- $$ga_{0,0} = (-2*B_{0,-1} + 16*B_{0,0} + 54*B_{0,1} - 4*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-170170131)$$
- $$ha_{0,0} = (-B_{0,-1} + 8*B_{0,0} + 60*B_{0,1} - 3*B_{0,2} + \text{offset1}) \gg \text{shift1} \quad (8-171171132)$$
- The samples labelled $Xb_{0,0}$, $Xc_{0,0}$, $Xd_{0,0}$, $Xe_{0,0}$, $Xf_{0,0}$, $Xg_{0,0}$ and $Xh_{0,0}$ for X being replaced by b, c, d, e, f, g and h, respectively, shall be derived by first calculating intermediate values denoted as $ba_{i,0}$, $ca_{i,0}$, $da_{i,0}$, $ea_{i,0}$, $fa_{i,0}$, $ga_{i,0}$ and $ha_{i,0}$ where $i = -1..2$ by applying the 4-tap filter to the nearest integer position samples in vertical direction: [Ed: (WJ) horizontal first yields the same result]
- $$ba_{i,0} = -3*B_{0,-1} + 60*B_{0,0} + 8*B_{0,1} - B_{0,2} \quad (8-172172133)$$
- $$ca_{i,0} = -4*B_{0,-1} + 54*B_{0,0} + 16*B_{0,1} - 2*B_{0,2} \quad (8-173173134)$$
- $$da_{i,0} = -5*B_{0,-1} + 46*B_{0,0} + 27*B_{0,1} - 4*B_{0,2} \quad (8-174174135)$$
- $$ea_{i,0} = -4*B_{0,-1} + 36*B_{0,0} + 36*B_{0,1} - 4*B_{0,2} \quad (8-175175136)$$
- $$fa_{i,0} = -4*B_{0,-1} + 27*B_{0,0} + 46*B_{0,1} - 5*B_{0,2} \quad (8-176176137)$$
- $$ga_{i,0} = -2*B_{0,-1} + 16*B_{0,0} + 54*B_{0,1} - 4*B_{0,2} \quad (8-177177138)$$
- $$ha_{i,0} = -B_{0,-1} + 8*B_{0,0} + 60*B_{0,1} - 3*B_{0,2} \quad (8-178178139)$$
- The final prediction values $Xb_{0,0}$, $Xc_{0,0}$, $Xd_{0,0}$, $Xe_{0,0}$, $Xf_{0,0}$, $Xg_{0,0}$ and $Xh_{0,0}$ for X being replaced by b, c, d, e, f, g and h, respectively, shall be derived by applying the 4-tap filter to the intermediate values $Xa_{i,0}$ where $i = -1..2$ in horizontal direction:
- $$Xb_{0,0} = (-3*Xa_{-1,0} + 60*Xa_{0,0} + 8*Xa_{1,0} - Xa_{2,0} + \text{offset2}) \gg \text{shift2} \quad (8-179179140)$$
- $$Xc_{0,0} = (-4*Xa_{-1,0} + 54*Xa_{0,0} + 16*Xa_{1,0} - 2*Xa_{2,0} + \text{offset2}) \gg \text{shift2} \quad (8-180180141)$$
- $$Xd_{0,0} = (-5*Xa_{-1,0} + 46*Xa_{0,0} + 27*Xa_{1,0} - 4*Xa_{2,0} + \text{offset2}) \gg \text{shift2} \quad (8-181181142)$$
- $$Xe_{0,0} = (-4*Xa_{-1,0} + 36*Xa_{0,0} + 36*Xa_{1,0} - 4*Xa_{2,0} + \text{offset2}) \gg \text{shift2} \quad (8-182182143)$$
- $$Xf_{0,0} = (-4*Xa_{-1,0} + 27*Xa_{0,0} + 46*Xa_{1,0} - 5*Xa_{2,0} + \text{offset2}) \gg \text{shift2} \quad (8-183183144)$$

HEVC

$$X_{g0,0} = (-2 * X_{a_{-1,0}} + 16 * X_{a_{0,0}} + 54 * X_{a_{1,0}} - 4 * X_{a_{2,0}} + \text{offset2}) >> \text{shift2} \quad (8-184184145)$$

$$X_{h0,0} = (-X_{a_{-1,0}} + 8 * X_{a_{0,0}} + 60 * X_{a_{1,0}} - 3 * X_{a_{2,0}} + \text{offset2}) >> \text{shift2} \quad (8-185185146)$$

The positions labelled with lower-case letters within un-shaded blocks represent chroma samples at eighth-pel sample fractional locations. The chroma location offset in fractional-sample units (x_{FracC} , y_{FracC}) specifies which of the generated chroma samples at full-sample and fractional-sample locations is assigned to the predicted chroma sample value $\text{predSampleLXC}[x_c, y_c]$. This assignment is done according to [Table 8-12](#)~~Table 8-10~~. The value of $\text{predSampleLXC}[x_c, y_c]$ shall be the output.

Table 8-128-108-10 – Assignment of the chroma prediction sample $\text{predSampleLXC}[x_c, y_c]$ for (X, Y) being replaced by (1, b), (2, c), (3, d), (4, e), (5, f), (6, g), and (7, h), respectively

xFracC	0	0	0	0	0	0	0	0	0	X	X	X	X	X	X	X	X
yFracC	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	
predSampleLXC[x_c, y_c]	$B \ll \text{shift3}$	ba	ca	da	ea	fa	ga	ha	aY	bY	cY	dY	eY	fY	gY	hY	

8.4.2.2.3 Weighted sample prediction process

[Ed.: (KU) only the default weighted prediction part is added for bi-directional averaging]

Inputs to this process are:

- a location (x_B, y_B) specifying the top-left sample of the current prediction unit relative to the top left sample of the current coding unit,
- the width and height of this prediction unit, n_{PSW} and n_{PSH} ,
- two $(n_{\text{PSW}}) \times (n_{\text{PSH}})$ arrays predSamplesL0 and predSamplesL1 ,
- prediction list utilization flags, predFlagL0 and predFlagL1 ,
- the bit-depth of the chroma component, bitDepth .

Outputs of this process are:

- the $(n_{\text{PSW}}) \times (n_{\text{PSH}})$ array predSamples of prediction sample values.

Variables shift1 , shift2 , offset1 and offset2 are derived as follows.

- The variable shift1 is set equal to $14 - \text{bitDepth}$ and the variable shift2 is set equal to $15 - \text{bitDepth}$,
- The variable offset1 is set equal to $1 \ll (\text{shift1} - 1)$ and the variable offset2 is set equal to $1 \ll (\text{shift2} - 1)$.

Depending on the value of predFlagL0 and predFlagL1 , the prediction samples $\text{predSamples}[x, y]$ with $x = 0..(n_{\text{PSW}})-1$ and $y = 0..(n_{\text{PSH}})-1$ are derived as follows.

- If predFlagL0 is equal to 1 and predFlagL1 is equal to 0,

$$\text{predSamples}[x, y] = (\text{predSamplesL0}[x, y] + \text{offset1}) >> \text{shift1} \quad (8-186186147)$$

- Otherwise, if predFlagL0 is equal to 0 and predFlagL1 is equal to 1,

$$\text{predSamples}[x, y] = (\text{predSamplesL1}[x, y] + \text{offset1}) >> \text{shift1} \quad (8-187187148)$$

- Otherwise (both predFlagL0 and predFlagL1 are equal to 1),

$$\text{predSamples}[x, y] = \text{Clip3}(0, (1 \ll \text{bitDepth}) - 1, \text{predSamplesL0}[x, y] + \text{predSamplesL1}[x, y] + \text{offset2}) >> \text{shift2} \quad (8-188188149)$$

8.4.3 Decoding process for the residual signal of coding units coded in inter prediction mode

Inputs to this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a variable $\log_2 \text{CUSize}$ specifying the size of the current coding unit.

HEVC

Outputs of this process are:

- a $(nCS_L) \times (nCS_L)$ array $resSamples_L$ of luma residual samples, where nCS_L is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array $resSamples_{Cb}$ of chroma residual samples for the component Cb, where nCS_C is derived as specified below,
- a $(nCS_C) \times (nCS_C)$ array $resSamples_{Cr}$ of chroma residual samples for the component Cr, where nCS_C is derived as specified below.

The variable nCS_L is set equal to $1 \ll \log_2 CUSize$ and the variable nCS_C is set equal to $(1 \ll \log_2 CUSize) \gg 1$.

Let $resSamples_L$ be a $(nCS_L) \times (nCS_L)$ array of luma residual samples and let $resSamples_{Cb}$ and $resSamples_{Cr}$ be two $(nCS_C) \times (nCS_C)$ arrays of chroma residual samples.

Depending on `no_residual_data_flag`, the following applies:

- If `no_residual_data_flag` is equal to 1, all samples of the $(nCS_L) \times (nCS_L)$ array $resSamples_L$ and all samples of the two $(nCS_C) \times (nCS_C)$ arrays $resSamples_{Cb}$ and $resSamples_{Cr}$ are set equal to 0.
- Otherwise (`no_residual_data_flag` is equal to 0), the following ordered steps apply:
 1. The decoding process for luma residual blocks as specified in subclause 8.4.3.1 below is invoked with the luma location (x_C, y_C) , the luma location (x_B, y_B) set equal to $(0, 0)$, the variable `log2TrafoSize` set equal to `log2CUSize`, the variable `trafoDepth` set equal to 0, the variable `nCS` set equal to nCS_L , and the $(nCS_L) \times (nCS_L)$ array $resSamples_L$ as the inputs and the output is a modified version of the $(nCS_L) \times (nCS_L)$ array $resSamples_L$.
 2. The decoding process for chroma residual blocks as specified in subclause 8.4.3.2 below is invoked with the luma location (x_C, y_C) , the luma location (x_B, y_B) set equal to $(0, 0)$, the variable `log2TrafoSize` set equal to `log2CUSize`, the variable `trafoDepth` set equal to 0, the variable `cldx` set equal to 1, the variable `nCS` set equal to nCS_C , and the $(nCS_C) \times (nCS_C)$ array $resSamples_{Cb}$ as the inputs and the output is a modified version of the $(nCS_C) \times (nCS_C)$ array $resSamples_{Cb}$.
 3. The decoding process for chroma residual blocks as specified in subclause 8.4.3.2 below is invoked with the luma location (x_C, y_C) , the luma location (x_B, y_B) set equal to $(0, 0)$, the variable `log2TrafoSize` set equal to `log2CUSize`, the variable `trafoDepth` set equal to 0, the variable `cldx` set equal to 2, the variable `nCS` set equal to nCS_C , and the $(nCS_C) \times (nCS_C)$ array $resSamples_{Cr}$ as the inputs and the output is a modified version of the $(nCS_C) \times (nCS_C)$ array $resSamples_{Cr}$.

8.4.3.1 Decoding process for luma residual blocks

Inputs to this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a luma location (x_B, y_B) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current coding unit,
- a variable `log2TrafoSize` specifying the size of the current block,
- a variable `trafoDepth` specifying the hierarchy depth of the current block relative to the coding unit,
- a variable `nCS` specifying the size, in luma samples, of the current coding unit,
- a $(nCS) \times (nCS)$ array $resSamples$ of luma residual samples.

Output of this process is:

- a modified version of the $(nCS) \times (nCS)$ array of luma residual samples.

Depending `split_transform_flag[ xB ][ yB ][ trafoDepth ]`, the following applies:

- If `split_transform_flag[ xB ][ yB ][ trafoDepth ]` is equal to 1, the following ordered steps apply:
 1. The variable `xB1` is set equal to $x_B + ((1 \ll \log_2 TrafoSize) \gg 1)$.
 2. The variable `yB1` is set equal to $y_B + ((1 \ll \log_2 TrafoSize) \gg 1)$.
 3. The decoding process for luma residual blocks as specified in this subclause is invoked with the luma location (x_C, y_C) , the luma location (x_B, y_B) , the variable `log2TrafoSize` set equal to `log2TrafoSize` – 1, the variable `trafoDepth` set equal to `trafoDepth` + 1, the variable `nCS`, and the $(nCS) \times (nCS)$ array $resSamples$ as the inputs and the output is a modified version of the $(nCS) \times (nCS)$ array $resSamples$.

HEVC

4. The decoding process for luma residual blocks as specified in this subclause is invoked with the luma location (x_C , y_C), the luma location (x_{B1} , y_{B1}), the variable $\log_2\text{TrafoSize}$ set equal to $\log_2\text{TrafoSize} - 1$, the variable trafoDepth set equal to $\text{trafoDepth} + 1$, the variable nCS , and the (nCS) $\times$ (nCS) array resSamples as the inputs and the output is a modified version of the (nCS) $\times$ (nCS) array resSamples .
 5. The decoding process for luma residual blocks as specified in this subclause is invoked with the luma location (x_C , y_C), the luma location (x_B , y_{B1}), the variable $\log_2\text{TrafoSize}$ set equal to $\log_2\text{TrafoSize} - 1$, the variable trafoDepth set equal to $\text{trafoDepth} + 1$, the variable nCS , and the (nCS) $\times$ (nCS) array resSamples as the inputs and the output is a modified version of the (nCS) $\times$ (nCS) array resSamples .
 6. The decoding process for luma residual blocks as specified in this subclause is invoked with the luma location (x_C , y_C), the luma location (x_{B1} , y_{B1}), the variable $\log_2\text{TrafoSize}$ set equal to $\log_2\text{TrafoSize} - 1$, the variable trafoDepth set equal to $\text{trafoDepth} + 1$, the variable nCS , and the (nCS) $\times$ (nCS) array resSamples as the inputs and the output is a modified version of the (nCS) $\times$ (nCS) array resSamples .
- Otherwise ($\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$ is equal to 0), the following ordered steps apply:
1. The variable nS is set equal to $1 \ll \log_2\text{TrafoSize}$.
 2. The scaling and transformation process as specified in subclause 8.5.18-5-1 is invoked with the luma location ($x_C + x_B$, $y_C + y_B$), the variable trafoDepth , the variable cldx set equal to 0, and the transform size trafoSize set equal to nS as the inputs and the output is a (nS) $\times$ (nS) array resSamplesBlock .
 3. The array construction process as specified in subclause 8.5.5 is invoked with the luma location (x_B , y_B), the variable cldx set equal to 0, the variable inputArraySize set equal to nS , the variable outputArraySize set equal to nCS , the (nS) $\times$ (nS) array resSamplesBlock , and the (nCS) $\times$ (nCS) array resSamples as the inputs and the output is a modified version of the (nCS) $\times$ (nCS) array resSamples .

8.4.3.2 Decoding process for chroma residual blocks

Inputs to this process are:

- a luma location (x_C , y_C) specifying the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a luma location (x_B , y_B) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current coding unit,
- a variable $\log_2\text{TrafoSize}$ specifying the size of the current block,
- a variable trafoDepth specifying the hierarchy depth of the current block relative to the coding unit,
- a variable cldx specifying the chroma component of the current block,
- a variable nCS specifying the size, in chroma samples, of the current coding unit,
- a (nCS) $\times$ (nCS) array resSamples of chroma residual samples.

Output of this process is:

- a modified version of the (nCS) $\times$ (nCS) array of chroma residual samples.

The variable splitChromaFlag is derived as follows:

- If $\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$ is equal to 1 and $\log_2\text{TrafoSize}$ is greater than $\text{Log2MinTrafoSize} + 1$, splitChromaFlag is set equal to 1.
- Otherwise ($\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$ is equal to 0 or $\log_2\text{TrafoSize}$ is equal to $\text{Log2MinTrafoSize} + 1$), splitChromaFlag is set equal to 0.

Depending splitChromaFlag , the following applies:

- If splitChromaFlag is equal to 1, the following ordered steps apply:
 1. The variable x_{B1} is set equal to $x_B + ((1 \ll \log_2\text{TrafoSize}) \gg 1)$.
 2. The variable y_{B1} is set equal to $y_B + ((1 \ll \log_2\text{TrafoSize}) \gg 1)$.
 3. The decoding process for residual chroma blocks as specified in this subclause is invoked with the luma location (x_C , y_C), the luma location (x_B , y_B), the variable $\log_2\text{TrafoSize}$ set equal to $\log_2\text{TrafoSize} - 1$, the variable trafoDepth set equal to $\text{trafoDepth} + 1$, the variable cldx , the variable nCS , and the (nCS) $\times$ (nCS) array resSamples as the inputs and the output is a modified version of the (nCS) $\times$ (nCS) array resSamples .

HEVC

4. The decoding process for residual chroma blocks as specified in this subclause is invoked with the luma location (xC, yC), the luma location (xB1, yB1), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the variable cldx, the variable nCS, and the (nCS)x(nCS) array resSamples as the inputs and the output is a modified version of the (nCS)x(nCS) array resSamples.
 5. The decoding process for residual chroma blocks as specified in this subclause is invoked with the luma location (xC, yC), the luma location (xB, yB1), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the variable cldx, the variable nCS, and the (nCS)x(nCS) array resSamples as the inputs and the output is a modified version of the (nCS)x(nCS) array resSamples.
 6. The decoding process for residual chroma blocks as specified in this subclause is invoked with the luma location (xC, yC), the luma location (xB1, yB1), the variable log2TrafoSize set equal to log2TrafoSize – 1, the variable trafoDepth set equal to trafoDepth + 1, the variable cldx, the variable nCS, and the (nCS)x(nCS) array resSamples as the inputs and the output is a modified version of the (nCS)x(nCS) array resSamples.
- Otherwise (splitChromaFlag is equal to 0), the following ordered steps apply:
1. The variable nS is set equal to (1 << log2TrafoSize) >> 1.
 2. The scaling and transformation process as specified in subclause 8.5.1 is invoked with the luma location (xC + xB, yC + yB), the variable trafoDepth, the variable cldx, and the transform size trafoSize set equal to nS as the inputs and the output is a (nS)x(nS) array resSamplesBlock.
 3. The array construction process as specified in subclause 8.5.5 is invoked with the luma location (xB, yB), the variable cldx, the variable inputArraySize set equal to nS, the variable outputArraySize set equal to nCS, the (nS)x(nS) array resSamplesBlock, and the (nCS)x(nCS) array resSamples as the inputs and the output is a modified version of the (nCS)x(nCS) array resSamples.

8.5 Scaling, transformation and array construction process prior to deblocking filter process

8.5.1 Scaling and transformation process

Inputs to this process are:

- a luma location (xT, yT) specifying the top-left luma sample of the current transform unit relative to the top-left luma sample of the current picture,
- a variable trafoDepth specifying the hierarchy depth of the current block relative to the coding unit,
- a variable cldx specifying the chroma component of the current block,
- a variable nS specifying the size of the current transform unit.

Output of this process is:

- a modified version of the (nS)x(nS) array of residual samples r with elements r_{ij}.

The quantization parameter qP is derived as follows.

- If cldx is equal to 0,

$$qP = QP^*_Y \quad (8-189+89+50)$$

- Otherwise,

$$qP = QP^*_C \quad (8-190+90+54)$$

The (nS)x(nS) array of residual samples r are derived as specified in the following ordered steps.

1. The inverse scanning process for transform coefficients as specified in subclause 8.5.2 is invoked with the size of the current transform unit nS, the list of transform coefficients transCoeffLevel[xT][yT][trafoDepth][cldx] and the variable cldx as the inputs and the output is a (nS)x(nS) array c_{ij}.
2. The scaling process for transform coefficients as specified in subclause 8.5.3 is invoked with the size of the transform unit nS, the (nS)x(nS) array c, the chroma component variable cldx and the quantization parameter qP as the inputs and the output is a scaled transform coefficient (nS)x(nS) array d.
3. The transformation process for scaled transform coefficients as specified in subclause 8.5.4 is invoked with the size of the transform unit nS, the scaled transform coefficient (nS)x(nS) array d and the chroma component variable cldx as the inputs and the output is a residual samples (nS)x(nS) array r.

HEVC

8.5.2 Inverse scanning process for transform coefficients

Inputs to this process are:

- a variable nS specifying the size of the current transform unit,
- a list of $(nS) \times (nS)$ values $\text{transCoeffLevel}[xT][yT][\text{trafoDepth}][cIdx]$.
- a variable $cIdx$ specifying the chroma component of the current block,

Output of this process is a variable c containing a two-dimensional array of $(nS) \times (nS)$ values.

- The variable $c[i][j]$ which is located in the (i, j) position in the array c is derived as follows.
- The current transform unit is divided into $(nS \gg 2) * (nS \gg 2)$ subsets of $4 * 4$ samples. The subsets are processed in zig-zag scan order. The position $(k0, l0)$ in the array c , corresponding to the top left position of a subset s , is derived as follows.

$$\begin{aligned} k0 &= \text{ZigZag}[\log_2(nS \gg 2)][s][0] \ll 2 \\ l0 &= \text{ZigZag}[\log_2(nS \gg 2)][s][1] \ll 2, \end{aligned}$$

$$\text{with } s = 0..((nS \gg 2) * (nS \gg 2)) - 1$$

(8-191+91+52)

- For every subset s , the 16 transform coefficient level at scanning position n are mapped to the position (i, j) in the array c using the reverse zig-zag scan.

$$\begin{aligned} i &= k0 + \text{ZigZag}[2][n][0] \\ j &= l0 + \text{ZigZag}[2][n][1] \\ c[i][j] &= \text{transCoeffLevel}[xT][yT][\text{trafoDepth}][cIdx][n + (s \ll 4)], \end{aligned}$$

$$\text{with } n = 15..0$$

(8-192+92+52)

8.5.3 Scaling process for transform coefficients

Inputs of this process are:

- a variable nS specifying the size of the current transform unit,
- a $(nS) \times (nS)$ array c of transform coefficients with elements c_{ij} ,
- a variable $cIdx$ specifying the chroma component of the current block,
- a variable qP specifying the quantization parameter.

Output of this process is scaled transform coefficients as a $(nS) \times (nS)$ array of d with elements d_{ij} .

The variable trafoPrecisionExt is derived as follows:

- If nS is greater than 4,
 - If $cIdx$ is equal to 0 and $\text{bit_depth_luma_minus8}$ is equal to 0, trafoPrecisionExt is set equal to 2.
 - Otherwise, if $cIdx$ is not equal to 0 and $\text{bit_depth_chroma_minus8}$ is equal to 0, trafoPrecisionExt is set equal to 2.
 - Otherwise, trafoPrecisionExt is set equal to 0.
- Otherwise, trafoPrecisionExt is set equal to 0.

[Ed.: (WJ) wait decision on transform precision extension]

The scaled transform coefficient array d_{ij} is derived as follows.

$$d_{ij} = (c_{ij} * \text{LevelScale}_{(nS) \times (nS)}[qP \% 6][i][j]) \ll (qP / 6 + \text{trafoPrecisionExt}), \text{ with } i, j = 0..nS-1$$

(8-193+93+58)

[Ed.: (WJ) $\text{LevelScale}_{(nS) \times (nS)}$ should be very large table up to 32×32 . Recent contributions (JCTVC-C209 and JCTVC-C255) shown that this matrix could be replaced by one constants per qP without coding efficiency penalty. Maybe it is better to wait.]

[Ed.: (WJ) dependent on transformation process – should be modified again after transformation process is fixed]

8.5.4 Transformation process for scaled transform coefficients

Inputs of this process are:

HEVC

- a variable nS specifying the size of the current transform unit,
- a (nS)x(nS) array d of scaled transform coefficients with elements d_{ij}.
- a variable cIdx specifying the chroma component of the current block,

Output of this process is residual samples as a (nS)x(nS) array r with elements r_{ij}.

The variable trafoPrecisionExt is derived as follows:

- If nS is greater than 4,
 - If cIdx is equal to 0 and bit_depth_luma_minus8 is equal to 0, trafoPrecisionExt is set equal to 4.
 - Otherwise, if cIdx is not equal to 0 and bit_depth_chroma_minus8 is equal to 0, trafoPrecisionExt is set equal to 4.
 - Otherwise, trafoPrecisionExt is set equal to 0.
- Otherwise, trafoPrecisionExt is set equal to 0.

[Ed.: (WJ) wait decision on transform precision extension]

[Ed: (WJ) derivation of trafoPrecisionExt is duplicated to that of the scaling process. Better to remove one of two.]

Depending on cIdx, a variable planarFlag is derived as follows:

- If cIdx is equal to 0, planarFlag is set equal to planar_flag_luma
- Otherwise, planarFlag is set equal to planar_flag_chroma [Ed.: (WJ): it is not necessary now since DST is not applied to chroma anyway]

Depending on PredMode and IntraPredMode, the following applies:

- If PredMode is equal to MODE_INTRA, nS is equal to 4, and cIdx is equal to 0, the variables horizTrType and vertTrType are specified as Table 8-13Table 8-14 with IntraPredMode as input. [Ed. (WJ): DST is applied only for luma 4x4 block]
- Otherwise, the variables horizTrType and vertTrType are set equal to 0.

Table 8-138-14 – Specification of horizTrType and vertTrType

<u>IntraPredMode</u>	<u>0</u>	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	<u>6</u>	<u>7</u>	<u>8</u>	<u>9</u>	<u>10</u>	<u>11</u>	<u>12</u>	<u>13</u>	<u>14</u>	<u>15</u>	<u>16</u>	<u>17</u>
<u>horizTrType</u>	<u>0</u>	<u>1</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>
<u>vertTrType</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>

<u>IntraPredMode</u>	<u>18</u>	<u>19</u>	<u>20</u>	<u>21</u>	<u>22</u>	<u>23</u>	<u>24</u>	<u>25</u>	<u>26</u>	<u>27</u>	<u>28</u>	<u>29</u>	<u>30</u>	<u>31</u>	<u>32</u>	<u>33</u>	<u>34</u>
<u>horizTrType</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>
<u>vertTrType</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>1</u>

The constructed residual samples are derived as specified in the following ordered steps.

1. Each (horizontal) row of scaled transform coefficients d_{ij} (i, j=0..nS-1) is transformed to e_{ij} (i, j=0..nS-1) by invoking the one-dimensional transformation process as specified in subclause 8.5.4.1 to 8.5.4.4 according to the size of the transform unit nS, with the (nS)x(nS) array d and the transform type variable horizTrType as the inputs and the output is the (nS)x(nS) array e.
2. Each (vertical) column of the resulting matrix e_{ij} (i, j=0..nS-1) is transformed to f_{ij} (i, j=0..nS-1) by invoking the one-dimensional transformation process as specified in subclause 8.5.4.1 to 8.5.4.4 according to the size of the transform unit nS, with the (nS)x(nS) array e and the transform type variable vertTrType as the inputs and the output is the (nS)x(nS) array f.
3. If nS is equal to 4 or 8, the residual sample value r_{ij} is derived by

$$r_{ij} = (f_{ij} + 2^{5+trafoPrecisionExt}) >> (6 + trafoPrecisionExt), \text{ with } i, j=0..(nS)x(nS)-1$$

(8-194194159)

HEVC

4. Otherwise (nS is equal to 16 or 32), the residual sample value r_{ij} is derived by

$$r_{ij} = (f_{ij} + 2^{9+\text{trafoPrecisionExt}}) \gg (10 + \text{trafoPrecisionExt}), \text{ with } i, j=0..(nS)x(nS)-1 \quad (8-195495460)$$

[Ed.: (WJ) dependent on transformation process – should be modified again after transformation process is fixed]

8.5.4.1 Transformation process for 4 samples

Inputs of this process is-are an array of 46-4 samples of the scaled transform coefficients x with elements x_i , with $i = 0..3$ and the transform type variable trType .

Output of this process is an array of 46-4 samples of the residual samples y with elements y_i , with $i = 0..3$.

[Ed.: (WJ) TBD] Depending on trType , the following applies:

– If trType is equal to 1, the following ordered steps apply:

1. A set of intermediate values c_0 , c_1 , c_2 and c_3 is calculated as follows:

$$\begin{aligned} c_0 &= x_0 + x_2 & (8-196496459) \\ c_1 &= x_2 + x_3 & (8-197497459) \\ c_2 &= x_0 - x_3 & (8-198498459) \\ c_3 &= 74 * x_1 & (8-199499459) \end{aligned}$$

2. The output values y_i with $i = 0..3$ are then specified as follows:

$$\begin{aligned} y_0 &= (29 * c_0 + 55 * c_1 + c_3 + 64) \gg 7 & (8-200200459) \\ y_1 &= (55 * c_2 - 29 * c_1 + c_3 + 64) \gg 7 & (8-201201459) \\ y_2 &= (74 * (x_0 - x_2) + 64) \gg 7 & (8-202202459) \\ y_3 &= (55 * c_0 + 29 * c_2 - c_3 + 64) \gg 7 & (8-203203459) \end{aligned}$$

[Ed. (WJ): proponent's comment - to share the quantization scaling value, transform precision (7-bit in this case) should be synchronized with DCT]

– Otherwise, the following ordered steps apply: [Ed. (WJ): TBD – 4-point DCT]

8.5.4.2 Transformation process for 8 samples

Inputs of this process is-are an array of 46-8 samples of the scaled transform coefficients x with elements x_i , with $i = 0..7$ and the transform type variable trType .

Output of this process is an array of 46-8 samples of the residual samples y with elements y_i , with $i = 0..7$.

[Ed. (WJ) TBD]

8.5.4.3 Transformation process for 16 samples

Inputs of this process is-are an array of 16 samples of the scaled transform coefficients x with elements x_i , with $i = 0..15$ and the transform type variable trType .

Output of this process is an array of 16 samples of the residual samples y with elements y_i , with $i = 0..15$.

[Ed. (WJ) TBD]

8.5.4.4 Transformation process for 32 samples

Inputs of this process is-are an array of 32 samples of the scaled transform coefficients x with elements x_i , with $i=0..31$ and the transform type variable trType .

Output of this process is an array of 32 samples of the residual samples y with elements y_i , with $i=0..31$.

[Ed. (WJ) TBD]

8.5.5 Array construction process

Inputs of this process are:

- a luma location (x_B , y_B) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current coding unit,
- a variable cIdx specifying the chroma component of the current block,

Formatted: Indent: Left: 0", Hanging: 0.3", Tab stops: 0.3", Left

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Tab after: 0.5" + Indent at: 0.5", Keep with next, Keep lines together, Tab stops: 0.2", Left

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Not Superscript/ Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Tab after: 0.5" + Indent at: 0.5", Keep with next, Keep lines together, Tab stops: 0.2", Left

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Indent: Left: 0", Hanging: 0.3", Tab stops: 0.3", Left

HEVC

- a variable nS specifying the size of the current block,
 - a variable nCS specifying the size of the current coding unit,
 - a (nS)x(nS) array resSampleBlock specifying the current block samples,
 - a (nCS)x(nCS) array resSample specifying the samples of the current coding unit.
- Output of this process is a modified (nCS)x(nCS) array resSample specifying the samples of the current coding unit.
- The modified array resSample is derived as follows.

$$\text{resSample}[xB+i, yB+j] = \text{resSampleBlock}[i, j], \text{ with } i, j = 0..nS-1 \quad (8-204204427)$$

8.6 In-loop filter process

[Ed: (WJ) overall process description need to be inserted]

8.6.1 Deblocking filter process

A conditional filtering process shall be performed on a treeblock basis after the completion of the picture construction process prior to deblocking filter process for the entire decoded picture (as specified in subclauses XXX and YYY) [Ed.: (WJ) those subclauses seem not defined yet], with all treeblocks in a picture processed in order of increasing treeblock addresses.

Each treeblock is processed on a coding unit basis with the same order as decoding process. For each coding unit, vertical edges are filtered first, starting with the edge on the left-hand side of the coding unit proceeding through the edges towards the right-hand side of the coding unit in their geometrical order. Then, the horizontal edges are filtered starting with the edge on the top of the coding unit proceeding through the edges towards the bottom of the coding unit in their geometrical order.

Sample values above of the current coding unit that may have already been modified by the filtering of horizontal edges of deblocking filter process operation on previous coding unit shall be used as inputs to the deblocking filter process on the current coding unit and may be further modified during the filtering of the current coding unit. Sample values to the left of the current coding unit shall be used as inputs to the deblocking filter process on the current coding unit and may be further modified during the filtering of the current coding unit. Sample values to the left of the current coding unit may be modified by the filtering of vertical edge and may be further modified by the filtering of horizontal edges.

Sample values modified during filtering of vertical edges are used as input for the filtering of the horizontal edges. For sample values modified by both filtering of horizontal edges and filtering of vertical edges, filtering of horizontal edges is applied after filtering of vertical edges.

The deblocking filter process shall be applied to all prediction unit edges and transform unit edges of a picture, except edges at the boundary of the picture—and, any edges for which the deblocking filter process is disabled by disable_deblocking_filter_idc and any edges coincide with slice boundaries when loop_filter_across_slice_flag is equal to 0. For the transform units and prediction units with edges smaller than 8 samples in either vertical or horizontal direction, only the edges lying on the 8x8 sample grid are filtered.

~~When disable_deblocking_filter_idc is not equal to 1, the deblocking filter process is invoked. If disable_deblocking_filter_idc is equal to 1, the deblocking filter process is simply omitted—and if loop_filter_across_slice_flag is equal to 0, the deblocking filter process is omitted at slice boundaries, otherwise as the following ordered steps apply for each coding unit with the same order as decoding process.~~

1. The coding unit size nS is set equal to $1 \ll \log_2 \text{CUsSize}$.
2. The variables FilterInternalEdgesFlag, FilterLeftCuEdgeFlag and FilterTopCuEdgeFlag are derived as follows.
 - The variable FilterInternalEdges is set equal to 1.
 - If the left boundary of current coding unit is the left boundary of the picture or if the left boundary of current coding unit is the left boundary of the slice and loop_filter_across_slice_flag is equal to 0, the variable FilterLeftCuEdgeFlag is set equal to 0, otherwise set equal to 1.
 - If the top boundary of current coding unit is the top boundary of the picture or if the top boundary of current coding unit is the top boundary of the slice and loop_filter_across_slice_flag is equal to 0, the variable FilterTopCuEdgeFlag is set equal to 0, otherwise set equal to 1.
3. All elements of two-dimensional array of size (nS)x(nS), horEdgeFlags and verEdgeFlags are initialized to zero.

HEVC

4. The derivation process of transform unit boundary specified in subclause 8.6.1.1 are invoked with the luma location (x_B, y_B) set equal to (0, 0), the transform unit size $\log_2\text{TrafoSize}$ set equal to $\log_2\text{CUsSize}$ and the variable trafoDepth set equal to 0 as the inputs and the modified horEdgeFlags and verEdgeFlags as outputs.
5. The derivation process of prediction unit boundary specified in subclause 8.6.1.2 are invoked with the coding unit size $\log_2\text{CUsSize}$ and the prediction partition mode PartMode as inputs, and the modified horEdgeFlags and verEdgeFlags as outputs.
6. The derivation process of the boundary filtering strength specified in subclause 8.6.1.3 is invoked with the luma location (x_C, y_C), the coding unit size $\log_2\text{CUsSize}$, horEdgeFlags and verEdgeFlags as inputs and an array of size $(2 \times n_S) \times (n_S)$, b_S as output.
7. The filtering process for coding unit specified in subclause 8.6.1.4 are invoked with the luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture, the coding unit size $\log_2\text{CUsSize}$ and the array b_S as inputs and the modified reconstructed picture as output.

8.6.1.1 Derivation process of transform unit boundary

Inputs of this process are:

- a luma location (x_B, y_B) specifying the top-left luma sample of the current block relative to the top-left luma sample of the current coding unit,
- a transform unit size $\log_2\text{TrafoSize}$,
- a variable trafoDepth .

Outputs of this process are:

- two-dimensional arrays of $(n_S) \times (n_S)$, horEdgeFlags and verEdgeFlags .

Depending on $\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$, the following applies:

- If $\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$ is equal to 1, the following ordered steps apply:
 1. The variable x_{B1} is set equal to $x_B + ((1 \ll \log_2\text{TrafoSize}) \gg 1)$.
 2. The variable y_{B1} is set equal to $y_B + ((1 \ll \log_2\text{TrafoSize}) \gg 1)$.
 3. The derivation process of transform unit boundary as specified in this subclause is invoked with the luma location (x_B, y_B), the variable $\log_2\text{TrafoSize1}$ set equal to $\log_2\text{TrafoSize} - 1$ and the variable trafoDepth1 set equal to $\text{trafoDepth} + 1$ as inputs and the outputs are the modified versions of two arrays, horEdgeFlags and verEdgeFlags .
 4. The derivation process of transform unit boundary as specified in this subclause is invoked with the luma location (x_{B1}, y_{B1}), the variable $\log_2\text{TrafoSize1}$ set equal to $\log_2\text{TrafoSize} - 1$ and the variable trafoDepth1 set equal to $\text{trafoDepth} + 1$ as inputs and the outputs are the modified versions of two arrays, horEdgeFlags and verEdgeFlags .
 5. The derivation process of transform unit boundary as specified in this subclause is invoked with the luma location (x_B, y_{B1}), the variable $\log_2\text{TrafoSize1}$ set equal to $\log_2\text{TrafoSize} - 1$ and the variable trafoDepth1 set equal to $\text{trafoDepth} + 1$ as inputs and the outputs are the modified versions of two arrays, horEdgeFlags and verEdgeFlags .
 6. The derivation process of transform unit boundary as specified in this subclause is invoked with the luma location (x_{B1}, y_{B1}), the variable $\log_2\text{TrafoSize1}$ set equal to $\log_2\text{TrafoSize} - 1$ and the variable trafoDepth1 set equal to $\text{trafoDepth} + 1$ as inputs and the outputs are the modified versions of two arrays, horEdgeFlags and verEdgeFlags .
- Otherwise ($\text{split_transform_flag}[x_B][y_B][\text{trafoDepth}]$ is equal to 0), the following applies:
 - If y_B is equal to zero, $\text{horEdgeFlags}[x_B + k][y_B]$ is set equal to $\text{FilterTopCuEdgeFlag}$, otherwise $\text{horEdgeFlags}[x_B + k][y_B]$ is set equal to $\text{FilterInternalEdgesFlag}$ for $k = 0..(1 \ll \log_2\text{TrafoSize}) - 1$.
 - If x_B is equal to zero, $\text{verEdgeFlags}[x_B][y_B + k]$ is set equal to $\text{FilterLeftCuEdgeFlag}$, otherwise $\text{verEdgeFlags}[x_B][y_B + k]$ is set equal to $\text{FilterInternalEdgesFlag}$ for $k = 0..(1 \ll \log_2\text{TrafoSize}) - 1$.

8.6.1.2 Derivation process of prediction unit boundary

Inputs of this process are:

- a variable $\log_2\text{CUsSize}$ specifying the coding unit size,

HEVC

- a prediction partition mode PartMode.

Outputs of this process are:

- two-dimensional arrays of (nS)x(nS), horEdgeFlags and verEdgeFlags.

Depending on PartMode, the following applies:

- If PartMode is equal to PART_2NxN or PART_NxN, horEdgeFlags[k][1 << (log2CUsSize – 1)] is set equal to FilterInternalEdgesFlag for k = 0.. (1 << log2CUsSize) – 1.
- If PartMode is equal to PART_Nx2N or PART_NxN, verEdgeFlags[1 << (log2CUsSize – 1)][k] is set equal to FilterInternalEdgesFlag for k = 0.. (1 << log2CUsSize) – 1.

8.6.1.3 Derivation process of boundary filtering strength

Inputs of this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top-left luma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit,
- a two-dimensional arrays of size (nS)x(nS), horEdgeFlags and verEdgeFlags.

Output of this process is an array of size (2)x(nS)x(nS), bS specifying the boundary filtering strength.

Let (xE_k, yE_j) with k = 0..nE-1 and j = 0..nE-1 specify a set of edge sample locations where nE is set equal to ((1 << log2CUsSize) >> 2), xE₀ = 0, yE₀ = 0, xE_{k+1} = xE_k + 4 and yE_{j+1} = yE_j + 4.

For (xE_k, yE_j) with k = 0..nE-1 and j = 0..nE-1, the following applies.

- If horEdgeFlags[xE_k][yE_j] is equal to 1,
 - Set sample p₀ = recPicture[xC + xE_k][yC + yE_j – 1] and q₀ = recPicture[xC + xE_k][yC + yE_j].
 - The variable filterDir is set equal to 1.
- Otherwise, if verEdgeFlags[xE_k][yE_j] is equal to 1,
 - Set sample p₀ = recPicture[xC + xE_k – 1][yC + yE_j] and q₀ = recPicture[xC + xE_k][yC + yE_j].
 - The variable filterDir is set equal to 0.
- Depending on the value of filterDir, the variable bS[filterDir][xE_k][yE_j] is derived as follows.
 - If the block edge is also a coding unit edge and the following condition is true, the variable bS[0][xE_k][yE_j] is set equal to 4.
 - The sample p₀ or q₀ is in a coding unit coded with intra prediction mode
 - Otherwise, if the following condition is true, the variable bS[filterDir][xE_k][yE_j] is set equal to 3.
 - The sample p₀ or q₀ is in a coding unit coded with intra prediction mode
 - Otherwise, if the following condition is true, the variable bS[filterDir][xE_k][yE_j] is set equal to 2.
 - The sample p₀ or q₀ is in a transform unit which contains non-zero transform coefficient level.
 - Otherwise, if any of the following conditions are true, the variable bS[filterDir][xE_k][yE_j] is set equal to 1.
 - The prediction unit containing sample p₀ has different reference pictures or a different number of motion vectors with the prediction unit containing the sample q₀.
 NOTE – The determination of whether the reference pictures used for the two prediction are the same or different is based on which pictures are referenced, without regard to whether a prediction is formed using an index into list 0 or an index into list 1, and also without regard to whether or not the index position within a reference picture list is different or not.
 - One motion vector is used to predict the prediction unit containing sample p₀, one motion vector is used to predict the prediction unit containing sample q₀, and the absolute difference between the horizontal or vertical component of the motion vector used is greater than or equal to 4 in units of quarter luma samples.
 - [Ed.: (WJ) needs to be checked again whether this condition covers all 2-motion cases] Two motion vectors are used to predict the prediction unit containing sample p₀, two motion vectors are used to predict

HEVC

the prediction unit containing sample q_0 , and at least one of the motion vector pairs corresponding the same reference pictures and the different boundary samples p_0 and q_0 satisfies the following condition:

1. The absolute difference between the horizontal or vertical component of a motion vector used in the prediction of the two prediction units is greater than or equal to 4 in units of quarter luma samples.
- Otherwise, the variable $bS[\text{filterDir}][x_{E_k}][y_{E_j}]$ is set equal to 0.

8.6.1.4 Filtering process for coding unit

Inputs of this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable $\log_2\text{CUsSize}$ specifying the coding unit size,
- an array bS specifying the boundary filtering strength.

Output of this process is:

- modified reconstruction of the picture.

The filtering process for luma edges in the current coding unit consists of the following ordered steps:

1. The variable nD is set equal to $1 \ll (\log_2\text{CUsSize} - 3)$.
2. All elements of the three-dimensional array of size $(2) \times (nD) \times (nD)$, $dEdge$ are initialized to zero.
3. All elements of the three-dimensional array of size $(2) \times (nD) \times (1 \ll \log_2\text{CUsSize})$, $dSample$ are initialized to zero.
4. All elements of the three-dimensional array of size $(2) \times (nD) \times (nD)$, $bStrength$ are initialized to zero.
5. For x_{D_k} set equal to $x_C + (k \ll 3)$, $k=0..nD-1$, the following applies:
 - For y_{D_m} set equal to $y_C + (m \ll 3)$, $m=0..nD-1$, the following ordered steps apply:
 - a. Boundary filtering strength bS_{Ver} is derived as follows:

$$bS_{Ver} = \text{Max}(bS[0][x_{D_k}][y_{D_m} + i]) \text{ for } i = 0..7 \quad (8-205205428)$$
 - b. $bStrength[1][k][m]$ is set equal to bS_{Ver} .
 - c. Decision process for luma block edge in subclause 8.6.1.4.1 is invoked with the luma location of the coding unit (x_C, y_C), the luma location of the block (x_{D_k}, y_{D_m}), a variable $verticalEdgeFlag$ set equal to 1, and the boundary filtering strength bS_{Ver} as inputs and the decision $dEdge[1][k][m]$ and an array dS of size (8) as outputs.
 - d. $dSample[1][k][(m \ll 3) + i]$ is set equal to $dS[i]$ for $i=0..7$.
 - e. Boundary filtering strength bS_{Hor} is derived as follows:

$$bS_{Hor} = \text{Max}(bS[1][x_{D_k} + i][y_{D_m}]) \text{ for } i = 0..7 \quad (8-206206428)$$
 - f. $bStrength[0][k][m]$ is set equal to bS_{Hor} .
 - g. Decision process for luma block edge in subclause 8.6.1.4.1 is invoked with the luma location of the coding unit (x_C, y_C), the luma location of the block (x_{D_k}, y_{D_m}), a variable $verticalEdgeFlag$ set equal to 0, the boundary filtering strength bS_{Hor} as inputs, the decision $dEdge[0][k][m]$ and an array dS of size (8) as outputs.
 - h. $dSample[0][m][(k \ll 3) + i]$ is set equal to $dS[i]$ for $i=0..7$.
6. For x_{D_k} set equal to $x_C + (k \ll 3)$, $k=0..nD-1$, the following applies:
 - For y_{D_m} set equal to $y_B + (m \ll 3)$, $m=0..nD-1$, the following ordered steps apply:
 - a. $dS[i]$ is set equal to $dSample[1][k][(m \ll 3) + i]$ for $i=0..7$.
 - b. Filtering process for luma block edge in subclause 8.6.1.4.2 is invoked with the luma location of the coding unit (x_C, y_C), the luma location of the block (x_{D_k}, y_{D_m}), a variable $verticalEdgeFlag$ set equal to 1, the boundary filtering strength $bStrength[1][k][m]$, the decision $dEdge[1][k][m]$, and the array of size (8), dS as inputs and the modified luma picture buffer as outputs.

HEVC

7. For yD_m set equal to $yC + (m \ll 3)$, $m=0..nD-1$, the following applies:
 - For xD_k set equal to $xC + (k \ll 3)$, $k=0..nD-1$, the following ordered steps apply:
 - a. If xD_k is equal to 0, the parameter $xPOS$ is set equal to 1. If xD_k is equal to $xB + ((nD-1) \ll 3)$ $xPOS$ is set equal to 2. Otherwise $xPOS$ is set to 0.
 - b. $dS[i]$ is set equal to $dSample[0][m][(k \ll 3) + i]$ for $i = 0..7$.
 - c. Filtering process for luma block edge in subclause 8.6.1.4.2 is invoked with the luma location of the coding unit (xC, yC), the luma location of the block (xD_k, yD_m), a variable $verticalEdgeFlag$ set equal to 0, the boundary filtering strength $bStrength[0][k][m]$, the decision $dEdge[0][k][m]$, and the array of size (8), dS , $xPOS$, $dS_L[m][i]$, $dE_L[m]$, $bS_L[m]$, and $t_{CL}[m]$, as inputs and the modified luma picture buffer as output.
 - The elements of the two dimensional array of size $(3) \times (nD)$, dS_L are set as follows. $dS_L[m][0]$, $dS_L[m][1]$, and $dS_L[m][2]$, are set equal to $dS[5]$, $dS[6]$ and $dS[7]$.
 - The elements of the array of size (nD) , dE_L are set as follows. $dE_L[m]$ is set equal to $dEdge[0][k][m]$.
 - The elements of the array of size (nD) , bS_L are set as follows. $bS_L[m]$ is set equal to $bStrength[0][k][m]$.
 - The elements of the array of size (nD) , t_C are set as follows. $t_{CL}[m]$ is set equal to t_C .

The filtering process for chroma edges in the current coding unit consists of the following ordered steps:

1. The variable nD is set equal to $1 \ll (\text{Max}(\log_2 \text{CUsSize}, 4) - 4)$.
2. For xD_k set equal to $(xC / 2) + (k \ll 3)$, $k=0..nD-1$, the following applies:
 - For yD_m set equal to $(yC / 2) + (m \ll 2)$, $m=0..nD*2-1$, the following ordered steps apply:
 - a. Boundary filtering strength $bSVer$ is derived as follows:

$$bSVer = bS[0][xD_k*2][yD_m*2] \quad (8-207207430)$$
 - b. Filtering process for chroma block edge in subclause 8.6.1.4.3 is invoked with the chroma location of the coding unit ($xC/2, yC/2$), the chroma location of the block (xD_k, yD_m), a variable $verticalEdgeFlag$ set equal to 1, a chroma component index $cldx$ set equal to 1 and the boundary filtering strength $bSVer$ as inputs and the modified chroma picture buffer as output.
 - c. Filtering process for chroma block edge in subclause 8.6.1.4.3 is invoked with the chroma location of the coding unit ($xC/2, yC/2$), the chroma location of the block (xD_k, yD_m), a variable $verticalEdgeFlag$ set equal to 1, a chroma component index $cldx$ set equal to 2 and the boundary filtering strength $bSVer$ as inputs and the modified chroma picture buffer as output.
3. For yD_m set equal to $(yC / 2) + (m \ll 3)$, $m=0..nD-1$, the following applies:
 - For xD_k set equal to $(xC / 2) + (k \ll 2)$, $k=0..nD*2-1$, the following ordered steps apply:
 - a. If xD_k is equal to 0, the parameter $xPOS$ is set equal to 1. If xD_k is equal to $xB + ((nD*2-1) \ll 2)$ $xPOS$ is set equal to 2. Otherwise $xPOS$ is set to 0.
 - b. Boundary filtering strength $bSHor$ is derived as follows:

$$bSHor = bS[1][xD_k*2][yD_m*2] \quad (8-208208431)$$
 - c. Filtering process for chroma block edge in subclause 8.6.1.4.3 is invoked with the chroma location of the coding unit ($xC/2, yC/2$), the chroma location of the block (xD_k, yD_m), a variable $verticalEdgeFlag$ set equal to 0, a chroma component index $cldx$ set equal to 1 and the boundary filtering strength $bSHor$, $xPOS$, $bS_L[m]$ and $t_{CL}[m]$ as inputs and the modified chroma picture buffer as output.
 - d. Filtering process for chroma block edge in subclause 8.6.1.4.3 is invoked with the chroma location of the coding unit ($xC/2, yC/2$), the chroma location of the block (xD_k, yD_m), a variable $verticalEdgeFlag$ set equal to 0, a chroma component index $cldx$ set equal to 2 and the boundary filtering strength $bSHor$, $xPOS$, $bS_L[m]$ and $t_{CL}[m]$ as inputs and the modified chroma picture buffer as output.

8.6.1.4.1 Decision process for luma block edge

Inputs of this process are:

Formatted: Heading 5

HEVC

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a luma location (x_B, y_B) specifying the top-left luma sample of the current block relative to the top left luma sample of the current coding unit,
- a variable verticalEdgeFlag,
- a variable bS specifying the boundary filtering strength,

Output of this process is:

- a variable dE containing a decision,
- one-dimensional array of size (8), dS containing decisions.

Let s' represent the luma sample array $recPicture_L$ of the current picture.

A variable β is specified as [Table 8-14](#) ~~Table 8-13~~ with luma quantization parameter qP_L as input.

A variable t_C is specified as follows:

- If bS is greater than 2, the variable t_C is specified as [Table 8-14](#) ~~Table 8-13~~ with luma quantization parameter ($qP_L + 4$) as input,
- Otherwise (bS is equal or less than 2), the variable t_C is specified as [Table 8-14](#) ~~Table 8-13~~ with luma quantization parameter qP_L as input.

Depending on verticalEdgeFlag, the following applies:

- If verticalEdgeFlag is equal to 1, the following ordered steps apply:

1. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 2,5$ are derived as follows:

$$q_{i,k} = s'[xC + xB + i, yC + yB + k] \quad (8-209209447)$$

$$p_{i,k} = s'[xC + xB - i - 1, yC + yB + k] \quad (8-210210448)$$

2. The variable d is derived as follows:

$$d = |p_{2,2} - 2*p_{1,2} + p_{0,2}| + |q_{2,2} - 2*q_{1,2} + q_{0,2}| + |p_{2,5} - 2*p_{1,5} + p_{0,5}| + |q_{2,5} - 2*q_{1,5} + q_{0,5}| \quad (8-211211449)$$

3. The variable dE is set equal to 0.

4. If bS is not equal to 0 and d is less than β , the following ordered steps apply:

- a. for each sample location ($xC + xB, yC + yB + k$), $k = 0..7$, the following ordered steps apply:

- a. The decision process for a luma sample specified in subclause 8.6.1.4.4 is invoked with sample values $p_{i,k}, q_{i,k}$ with $i = 0..3$, the boundary filtering strength bS and the variables d, β and t_C as inputs and a decision dSam as output.

- b. The variable dS[k] is set equal to dSam

- b. The variable dE is set equal to 1.

- Otherwise (verticalEdgeFlag is equal to 0), the following ordered steps apply:

1. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 2,5$ are derived as follows:

$$q_{i,k} = s'[xC + xB + k, yC + yB + i] \quad (8-212212435)$$

$$p_{i,k} = s'[xC + xB + k, yC + yB - i - 1] \quad (8-213213436)$$

2. The variable d is derived as follows:

$$d = |p_{2,2} - 2*p_{1,2} + p_{0,2}| + |q_{2,2} - 2*q_{1,2} + q_{0,2}| + |p_{2,5} - 2*p_{1,5} + p_{0,5}| + |q_{2,5} - 2*q_{1,5} + q_{0,5}| \quad (8-214214437)$$

3. The variable dE is set equal to 0.

4. If bS is not equal to 0 and d is less than β , the following ordered steps apply:

- a. For each sample location ($xC + xB + k, yC + yB$), $k = 0..7$, the following ordered steps apply:

HEVC

- a. The decision process for a luma sample specified in subclause 8.6.1.4.4 is invoked with sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, the boundary filtering strength bS and the variables d , β and t_C as inputs and a decision $dSam$ as output.
- b. The variable $dS[k]$ is set equal to $dSam$.
- b. The variable dE is set equal to 1.

8.6.1.4.18.6.1.4.2 Filtering process for luma block edge

Inputs of this process are:

- a luma location (x_C , y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a luma location (x_B , y_B) specifying the top-left luma sample of the current block relative to the top left luma sample of the current coding unit,
- a variable $verticalEdgeFlag$,
- a variable bS specifying the boundary filtering strength,
- a variable dE containing a decision,
- one-dimensional array of size (8), dS containing decisions,
- a variable bS_L ,
- a variable t_{CL} ,

Output of this process is:

- modified reconstruction of the picture.

Let s' represent the luma sample array $recPicture_L$ of the current picture.

Depending on pcm_flag , a variable β is specified as follows:

- If pcm_flag is equal to 1, A-the variables β is specified as Table 8-14Table 8-11 with luma quantization parameter qP_L as input.
- Otherwise, the variables β is specified as Table 8-14Table 8-11 with luma quantization parameter qP_L as input.

A variable t_C is specified as follows:

- If bS is greater than 2, the variable t_C is specified as Table 8-14Table 8-11 with luma quantization parameter ($qP_L + 4$) as input,
- Otherwise (bS is equal or less than 2), the variable t_C is specified as Table 8-14Table 8-11 with luma quantization parameter qP_L as input.

Depending on $verticalEdgeFlag$, the following applies:

- If $verticalEdgeFlag$ is equal to 1, the following ordered steps apply:

1. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 0..7$ are derived as follows:

$$q_{i,k} = s'[xC + xB + i, yC + yB + k] \quad (8-215215432)$$

$$p_{i,k} = s'[xC + xB - i - 1, yC + yB + k] \quad (8-216216433)$$

2. If dE is not equal to 0, for each sample location ($xC + xB$, $yC + yB + k$), $k = 0..7$, the following ordered steps apply:

- a. The filtering process for a luma sample specified in subclause 8.6.1.4.5 is invoked with sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, the decision $dS[k]$, the boundary filtering strength bS and the variable t_C as inputs and the number of filtered samples nD and the filtered sample values p_i' and q_i' as outputs.
- b. The filtered sample values p_i' and q_i' with $i = 0..nD - 1$ replace the corresponding samples inside the sample array s' as follows:

$$s'[xC + xB + i, yC + yB + k] = q_i' \quad (8-217217435)$$

$$s'[xC + xB - i - 1, yC + yB + k] = p_i' \quad (8-218218436)$$

HEVC

Formatted: Indent: Left: 0", Hanging: 0.2", Tab stops: 0.2", Left

- Otherwise (verticalEdgeFlag is equal to 0), the following ordered steps apply:
 1. If xPOS is equal to 1, the parameters k_s and k_e are set to -3 and 4 respectively. If xD is equal to 2, the parameters k_s and k_e are set to 0 and 4 respectively. Otherwise k_s and k_e are set to 0 and 7 respectively.
 2. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = k_s..k_e$ are derived as follows:

$$q_{i,k} = s'[xC + xB + k, yC + yB + i] \quad (8-219219437)$$

$$p_{i,k} = s'[xC + xB + k, yC + yB - i - 1] \quad (8-220220438)$$
 3. If xPOS is less than 0 and dE_L is not equal to 0, for each sample location ($xC + xB + k, yC + yB$), $k = -3..-1$, the following ordered steps apply:
 - a. The filtering process for a luma sample specified in subclause 8.6.1.4.5 is invoked with sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, decision $dS_L[k+3]$, the boundary filtering strength bS_L and the variable t_{CL} as inputs and the number of filtered samples nD and the filtered sample values p_i' and q_i' as outputs.
 - b. The filtered sample values p_i' and q_i' with $i = 0..nD - 1$ replace the corresponding samples inside the sample array s' as follows:

$$s'[xC + xB + k, yC + yB + i] = q_i' \quad (8-221221459)$$

$$s'[xC + xB + k, yC + yB - i - 1] = p_i' \quad (8-222222460)$$
 5. If dE is not equal to 0, for each sample location ($xC + xB + k, yC + yB$), $k = 0..k_e$, the following ordered steps apply:
 - a. The filtering process for a luma sample specified in subclause 8.6.1.4.5 is invoked with sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, decision $dS[k]$, the boundary filtering strength bS and the variable t_C as inputs and the number of filtered samples nD and the filtered sample values p_i' and q_i' as outputs.
 - b. The filtered sample values p_i' and q_i' with $i = 0..nD - 1$ replace the corresponding samples inside the sample array s' as follows:

$$s'[xC + xB + k, yC + yB + i] = q_i' \quad (8-223223461)$$

$$s'[xC + xB + k, yC + yB - i - 1] = p_i' \quad (8-224224462)$$

8.6.1.4.3 Filtering process for chroma block edge

[Ed.: (WJ) cIdx cannot be 0 here]

Inputs of this process are:

- a luma location (xC, yC) specifying the top-left chroma sample of the current coding unit relative to the top left chroma sample of the current picture,
- a luma location (xB, yB) specifying the top-left chroma sample of the current block relative to the top left chroma sample of the current coding unit,
- a variable verticalEdgeFlag,
- a variable bS specifying the boundary filtering strength,
- a variable cIdx specifying the chroma component index.
- a variable xPOS,
- a variable bS_L ,
- a variable t_{CL}

Output of this process is:

- modified reconstruction of the picture.

Let s' be a variable specifying chroma sample array which is derived as follows.

- If cIdx is equal to 1, s' represents the chroma sample array $recPicture_{Cb}$ of the current picture.
- Otherwise (cIdx is equal to 2), s' represents the chroma sample array $recPicture_{Cr}$ of the current picture.

Formatted: Heading 5

HEVC

A variable t_C is specified as follows:

- If b_S is greater than 2, the variable t_C is specified as [Table 8-14](#) with luma quantization parameter ($q_{P_L} + 4$) as input,
- Otherwise (b_S is equal or less than 2), the variable t_C is specified as [Table 8-14](#) with luma quantization parameter q_{P_L} as input.

Depending on `verticalEdgeFlag`, the following applies:

- If `verticalEdgeFlag` is equal to 1, for each sample location ($x_C + x_B, y_C + y_B + k$), $k = 0..3$, the following ordered steps apply:

1. The sample values p_i and q_i with $i = 0..1$ are derived as follows:

$$q_i = s'[x_C + x_B + i, y_C + y_B + k] \quad (8-225225442)$$

$$p_i = s'[x_C + x_B - i - 1, y_C + y_B + k] \quad (8-226226443)$$

2. If b_S is greater than 2, the following ordered steps apply:

- a. The filtering process for a sample specified in subclause 8.6.1.4.6 is invoked with sample values p_i, q_i , with $i = 0..1$, the boundary filtering strength b_S and the variable t_C as inputs and the filtered sample values p_0' and q_0' as outputs.
- b. The filtered sample values p_0' and q_0' replace the corresponding samples inside the sample array s' as follows:

$$s'[x_C + x_B, y_C + y_B + k] = q_0' \quad (8-227227444)$$

$$s'[x_C + x_B - 1, y_C + y_B + k] = p_0' \quad (8-228228445)$$

- Otherwise (`verticalEdgeFlag` is equal to 0), the following ordered steps apply:

1. If x_{POS} is equal to 1, the parameters k_s and k_e are set to -1 and 2 respectively. If x_D is equal to 2, the parameters k_s and k_e are set to 0 and 2 respectively. Otherwise k_s and k_e are set to 0 and 3 respectively.
2. The sample values p_i and q_i with $i = 0..1$ and $k = k_s..k_e$ are derived as follows:

$$q_i = s'[x_C + x_B + k, y_C + y_B + i] \quad (8-229229446)$$

$$p_i = s'[x_C + x_B + k, y_C + y_B - i - 1] \quad (8-230230447)$$

3. If x_{POS} is less than 0, and if b_{S_L} is greater than 2, for each sample location ($x_C + x_B - 1, y_C + y_B$), the following ordered steps apply:

- a. The filtering process for a sample specified in subclause 8.6.1.4.6 is invoked with sample values p_i, q_i , with $i = 0..1$, the boundary filtering strength b_{S_L} and the variable t_{C_L} as inputs and the filtered sample values p_0' and q_0' as outputs.
- b. The filtered sample values p_0' and q_0' replace the corresponding samples inside the sample array s' as follows:

$$s'[x_C + x_B + k, y_C + y_B] = q_0' \quad (8-231231452)$$

$$s'[x_C + x_B + k, y_C + y_B - i - 1] = p_i' \quad (8-232232445)$$

4. If b_S is greater than 2, for each sample location ($x_C + x_B + k, y_C + y_B$), $k = 0..k_e$, the following ordered steps apply:

- c. The filtering process for a sample specified in subclause 8.6.1.4.6 is invoked with sample values p_i, q_i , with $i = 0..1$, the boundary filtering strength b_S and the variable t_C as inputs and the filtered sample values p_0' and q_0' as outputs.
- d. The filtered sample values p_0' and q_0' replace the corresponding samples inside the sample array s' as follows:

$$s'[x_C + x_B + k, y_C + y_B] = q_0' \quad (8-233233448)$$

HEVC

$$s'[xC + xB + k, yC + yB - 1] = p_0' \quad (8-234234449)$$

8.6.1.4.28.6.1.4.4 Decision process for a luma sample

[Ed: (WJ) no filtering when bS is equal to 0]

Inputs of this process are:

- sample values, p_i and q_i with $i = 0..2$,
- a variable bS specifying the boundary filtering strength,
- variables d, β and t_C .

Output of this process is:

- a variable dSam containing a decision

When the variable bS is not equal to 0, the following applies:

- If d is less than $(\beta \gg 2)$, $|p_3 - p_0| + |q_0 - q_3|$ is less than $(\beta \gg 3)$ and $|p_0 - q_0|$ is less than $(5 * t_C + 1) \gg 1$, dSam is set equal to 1.
- Otherwise, dSam is set equal to 0.

8.6.1.4.38.6.1.4.5 Filtering process for a luma sample

Inputs of this process are:

- sample values, p_i and q_i with $i = 0..3$,
- a variable dSam containing a decision,
- a variable t_C .

Output of this process is:

- number of filtered samples nD,
- filtered sample values, p_i' and q_i' with $i = 0..nD - 1$,

Depending on dSam, the following applies:

- When the variable dSam is equal to 1, the following strong filtering applies while nD is set equal to 3:

$$p_0' = \text{Clip1}_Y((p_2 + 2 * p_1 + 2 * p_0 + 2 * q_0 + q_1 + 4) \gg 3) \quad (8-235235450)$$

$$p_1' = \text{Clip1}_Y((p_2 + p_1 + p_0 + q_0 + 2) \gg 2) \quad (8-236236451)$$

$$p_2' = \text{Clip1}_Y((2 * p_3 + 3 * p_2 + p_1 + p_0 + q_0 + 4) \gg 3) \quad (8-237237452)$$

$$q_0' = \text{Clip1}_Y((p_1 + 2 * p_0 + 2 * q_0 + 2 * q_1 + q_2 + 4) \gg 3) \quad (8-238238453)$$

$$q_1' = \text{Clip1}_Y((p_0 + q_0 + q_1 + q_2 + 2) \gg 2) \quad (8-239239454)$$

$$q_2' = \text{Clip1}_Y((p_0 + q_0 + q_1 + 3 * q_2 + 2 * q_3 + 4) \gg 3) \quad (8-240240455)$$

- Otherwise, the following weak filtering applies while nD is set equal to 2:

$$\Delta = \text{Clip3}(-t_C, t_C, (13 * (q_0 - p_0) + 4 * (q_1 - p_1) - 5 * (q_2 - p_2) + 16) \gg 5) \quad (8-241241456)$$

$$p_0' = \text{Clip1}_Y(p_0 + \Delta) \quad (8-242242457)$$

$$q_0' = \text{Clip1}_Y(q_0 - \Delta) \quad (8-243243458)$$

$$p_1' = \text{Clip1}_Y(p_1 + \Delta/2) \quad (8-244244459)$$

$$q_1' = \text{Clip1}_Y(q_1 - \Delta/2) \quad (8-245245460)$$

Each of the filtered sample values, p_i' with $i = 0..nD-1$, is substituted by the corresponding input sample value p_i if all of the following conditions are true.

Formatted: Subscript

Formatted: Subscript

HEVC

- p_i is a sample of an I_PCM block.
- `pcm_loop_filter_disable_flag` value is equal to 1.

Similarly, each of the filtered sample values, q_i' with $i = 0..nD-1$, is substituted by the corresponding input sample value q_i if all of the following conditions are true.

- q_i is a sample of an I_PCM block.
- `pcm_loop_filter_disable_flag` value is equal to 1.

[Ed. (WJ): for PCM case, deblocking filter applies first and the filtered pixels are restored. Rather than this, it's better to skip the filtering itself for PCM samples since first filtering is actually not needed.]

Table 8-148-128-11 – Derivation of threshold variables β and t_c from input Q

Q	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
β	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6	7	8
t_c	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Q	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37
β	9	10	11	12	13	14	15	16	17	18	20	22	24	26	28	30	32	34	36
t_c	1	1	1	1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4
Q	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	
β	38	40	42	44	46	48	50	52	54	56	58	60	62	64	64	64	64	64	
t_c	5	5	6	6	7	8	9	9	10	10	11	11	12	12	13	13	14	14	

8.6.1.4.48.6.1.4.6 Filtering process for a chroma sample

[Ed. (WJ) no filtering when bS is equal or less than 2]

Inputs of this process are:

- sample values, p_i and q_i with $i = 0..1$,
- a variable bS specifying the boundary filtering strength.
- a variable t_c .

Output of this process is:

- The filtered sample values, p_0' and q_0' .

When the variable bS is greater than 2, the filtered sample values p_0' and q_0' are derived by

$$\Delta = \text{Clip3}(-t_c, t_c, (((q_0 - p_0) < 2) + p_1 - q_1 + 4) >> 3)) \quad (8-246246461)$$

$$p_0' = \text{Clip1c}(p_0 + \Delta) \quad (8-247247462)$$

$$q_0' = \text{Clip1c}(q_0 - \Delta) \quad (8-248248463)$$

The filtered sample value, p_0' is substituted by the corresponding input sample value p_0 if all of the following conditions are true.

- p_0 is a sample of an I_PCM block.
- `pcm_loop_filter_disable_flag` value is equal to 1.

Similarly, the filtered sample value, q_0' is substituted by the corresponding input sample value q_0 if all of the following conditions are true.

- q_0 is a sample of an I_PCM block.
- `pcm_loop_filter_disable_flag` value is equal to 1.

HEVC

[Ed. (WJ): for PCM case, deblocking filter applies first and the filtered pixels are restored. Rather than this, it's better to skip the filtering itself for PCM samples since first filtering is actually not needed.]

8.6.2 Sample adaptive offset process

A sample adaptive offset process shall be conditionally performed after the completion of the deblocking filter process for the decoded picture.

This process is invoked when both `sample_adaptive_offset_enabled_flag` and `sample_adaptive_offset_flag` are equal to 1.

This process is performed on a region basis which is aligned with the LCU boundaries after the completion of the slice construction process prior to sample adaptive offset process for the entire decoded process.

The sample adaptive offset process is invoked **with the region equal to entire slice here**.

[Ed.: (WJ) invoking is needed]

8.6.2.1 Modification process for sample adaptive offset

[Ed.: (WJ) recursive partitioning is invoked here]

8.6.2.1.1 Modification process for luma samples

[Ed.: (WJ) offset is added here]

8.6.3 Adaptive loop filter process

An adaptive loop filtering process shall be conditionally performed on a treeblock basis after the completion of the sample adaptive offset process for the entire decoded picture, with all treeblocks in a picture processed in order of increasing treeblock addresses.

Each treeblock is processed on a coding unit basis with the same order as decoding process.

This process is invoked when both `adaptive_loop_filter_enabled_flag` and `adaptive_loop_filter_flag` are equal to 1.

This process is performed on a coding unit basis after the completion of the slice construction process prior to adaptive loop filter process for the entire decoded slice, with all coding units in a slice processed in order of coding unit scan order.

Filter coefficients c_L for luma samples and c_C for chroma samples are derived by invoking the process specified in subclause ~~8.6.3.28-6-2-1~~.

Filter index array `fldx` for luma samples are derived by invoking the process specified in subclause ~~8.6.3.38-6-2-2~~ with the luma location (`xC`, `yC`) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture and the coding unit size `log2CUsSize` as inputs.

When interpreting the luma samples of the coding unit as to be filtered, depending on `pcm_flag`, `pcm_loop_filter_disable_flag` and `alf_cu_control_flag`, the following applies.

- If `pcm_loop_filter_disable_flag` is equal to 1 and `pcm_flag` is equal to 1, the luma samples are not filtered.
- Otherwise, If-if `alf_cu_control_flag` is equal to 0, the luma samples are filtered,
- Otherwise (`alf_cu_control_flag` is equal to 1), if `AlfCuFlag[ xC ][ yC ]` is equal to 1 where `xC` and `yC` are the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture, the luma samples are filtered.
- Otherwise, the luma samples are not filtered.

When interpreting the chroma samples of the coding unit as to be filtered, depending on `pcm_flag`, `pcm_loop_filter_disable_flag` and `alf_chroma_idc`, the following applies.

- If `pcm_loop_filter_disable_flag` is equal to 1 and `pcm_flag` is equal to 1, both chroma samples are not filtered.
- Otherwise, If-if `alf_chroma_idc` is equal to 1, the `Cr` samples are filtered.
- Otherwise, if `alf_chroma_idc` is equal to 2, the `Cb` samples are filtered.
- Otherwise, if `alf_chroma_idc` is equal to 3, both chroma samples are filtered.
- Otherwise (`alf_chroma_idc` is equal to 0), both chroma samples are not filtered.

HEVC

For the luma samples of the coding unit interpreted as to be filtered, the filtering process for luma samples specified in subclause 8.6.3.48.6.2.3 is invoked with the luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture, the coding unit size $\log_2\text{CUsSize}$, and the filter index array fldx as inputs and the output is the modified filtered picture, recFiltPicture_L .

For the chroma samples of the coding unit interpreted as to be filtered, the filtering process for chroma samples specified in subclause 8.6.3.58.6.2.4 is invoked with the chroma location ($x_C/2, y_C/2$) specifying the top-left chroma sample of the current coding unit relative to the top left chroma sample of the current picture, the coding unit size $\log_2\text{CUsSize}-1$ and the chroma component index cldx equal to 1 as inputs and the output is the modified filtered picture, recFiltPicture_C .

For the chroma samples of the coding unit interpreted as to be filtered, the filtering process for chroma samples specified in subclause 8.6.3.58.6.2.4 is invoked with the chroma location ($x_C/2, y_C/2$) specifying the top-left chroma sample of the current coding unit relative to the top left chroma sample of the current picture, the coding unit size $\log_2\text{CUsSize}-1$ and the chroma component index cldx equal to 2 as inputs and the output is the modified filtered picture, $\text{recFiltPicture}_{C_2}$.

[Ed.: (WJ) recPicture : deblocked/output picture and recFiltPicture : ALFed picture]

[Ed.: (WJ) depending adaptive_loop_filter_flag, recFiltPicture should be copied to recPicture in subclause 8.6]

8.6.3.1 Boundary padding process

Inputs of this process are:

- a luma location (x_C, y_C) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable $\log_2\text{CUsSize}$ specifying the size of the current coding unit,
- a variable cldx specifying the chroma component index.

Output of this process is the padded luma sample array s'' .

Depending on cldx , the following applies:

- If cldx is equal to 0, a luma sample array s' is set equal to recPicture_L , a variable alfTap is set equal to $(\text{alf_length_luma_minus_5_div2} \ll 1) + 5$, a variable nS is set equal to $(1 \ll \log_2\text{CUsSize})$ and a variable $n\text{ExtPixels}$ is set equal to $(\text{alfTap} \gg 1)$.
- Otherwise, if cldx is equal to 1, a chroma sample array s' is set equal to recPicture_{C_1} , a variable alfTap is set equal to $(\text{alf_length_chroma_minus_5_div2} \ll 1) + 5$, a variable nS is set equal to $(1 \ll (\log_2\text{CUsSize} - 1))$ and a variable $n\text{ExtPixels}$ is set equal to $(\text{alfTap} \gg 1)$.
- Otherwise (cldx is equal to 2), a chroma sample array s' is set equal to recPicture_{C_2} , a variable alfTap is set equal to $(\text{alf_length_chroma_minus_5_div2} \ll 1) + 5$, a variable nS is set equal to $(1 \ll (\log_2\text{CUsSize} - 1))$ and a variable $n\text{ExtPixels}$ is set equal to $(\text{alfTap} \gg 1)$.

Depending on $\text{loop_filter_across_slice_flag}$, a variable s'' specifying the padded luma sample array is derived as:

- If $\text{loop_filter_across_slice_flag}$ is equal to 1, $s''[x_C+x][y_C+y]$ is set equal to $s'[x_C+x][y_C+y]$ for $x = -n\text{ExtPixels}..nS+n\text{ExtPixels}-1$ and $y = -n\text{ExtPixels}..nS+n\text{ExtPixels}-1$.

[Ed. (WJ): picture boundaries should be considered even for this case]

- Otherwise ($\text{loop_filter_across_slice_flag}$ is equal to 0), $s''[x_C+x][y_C+y]$ is derived by the following ordered steps:

1. $s''[x_C+x][y_C+y]$ is set equal to $s'[x_C+x][y_C+y]$ for $x=0..nS-1$ and $y=0..nS-1$.

2. If the left boundary of current block coincides the slice,

$$s''[x_C+x][y_C+y] = s'[x_C][y_C+y] \text{ where } x = -n\text{ExtPixels}..-1 \text{ and } y = 0..nS-1 \quad (8-249249462)$$

3. If the right boundary of current block coincides the slice,

$$s''[x_C+nS+x][y_C+y] = s'[x_C+nS-1][y_C+y] \text{ where } x = 0..n\text{ExtPixels}-1 \text{ and } y = 0..nS-1 \quad (8-250250462)$$

4. If the top boundary of current block coincides the slice,

$$s''[x_C+x][y_C+y] = s'[x_C+x][y_C] \text{ where } x = 0..nS-1 \text{ and } y = -n\text{ExtPixels}..-1 \quad (8-251251462)$$

5. If the bottom boundary of current block coincide the slice,

Formatted: Heading 4,Heading 4 Char Char,Heading 4 Char1

Formatted: Subscript

Formatted: Bulleted + Level: 1 + Aligned at: 0" + Tab after: 0.28" + Indent at: 0.28", Tab stops: Not at 0.55"

Formatted: Subscript

HEVC

$$s'[xC+x][yC+nS+y] = s'[xC+x][yC+nS-1] \text{ where } x = 0..nS-1 \text{ and } y = 0..nExtPixels-1 \quad (8-252252462)$$

6. If both the left and the top boundaries of current block coincide the slice and the current coding unit and its upper-left coding unit are not at the same slice,

$$s'[xC+x][yC+y] = s'[xC][yC] \text{ where } x = -nExtPixels..-1 \text{ and } y = -nExtPixels..-1 \quad (8-253253462)$$

7. If both the right and the top boundaries of current block coincide the slice and the current coding unit and its upper-right coding unit are not at the same slice,

$$s'[xC+nS+x][yC+y] = s'[xC+nS-1][yC] \text{ where } x = 0..nExtPixels-1 \text{ and } y = -nExtPixels..-1 \quad (8-254254462)$$

8. If both the left and the bottom boundaries of current block coincide the slice and the current coding unit and its bottom-left coding unit are not at the same slice,

$$s'[xC+x][yC+nS+y] = s'[xC][yC+nS-1] \text{ where } x = -nExtPixels..-1 \text{ and } y = 0..nExtPixels-1 \quad (8-255255462)$$

9. If both the right and the bottom boundaries of current block coincide the slice and the current coding unit and its bottom-right coding unit are not at the same slice,

$$s'[xC+nS+x][yC+nS+y] = s'[xC+nS-1][yC+nS-1] \text{ where } x = 0..nExtPixels-1 \text{ and } y = 0..nExtPixels-1 \quad (8-256256462)$$

Formatted: Indent: Left: 0.21", Numbered + Level: 1 + Numbering
Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" +
Tab after: 0.28" + Indent at: 0.28", Tab stops: 0.5", Left + 0.75",
Left + 1", Left + 1.18", Left + Not at 0.2" + 0.55" + 0.83" + 1.1"
+ 1.38"

Formatted: (Asian) Korean, (Other) (none)

8.6.3.18.6.3.2 Derivation process for filter coefficients

Outputs of this process are filter coefficients c_L for the luma samples and filter coefficients c_C for the chroma samples.

The luma filter coefficients c_L with elements $c_L[i][j]$, $i = 0..AlfNumFilters - 1$, $j = 0..AlfCodedLengthLuma - 1$ is derived as follows:

- If `alf_pred_method` is equal to 0 or the value of i is equal to 0,

$$c_L[i][j] = \text{alf_coeff_luma}[i][j] \quad (8-257257464)$$

- Otherwise (`alf_pred_method` is equal to 1 and the value of i is greater than 1),

$$c_L[i][j] = \text{alf_coeff_luma}[i][j] + c_L[i-1][j] \quad (8-258258465)$$

Considering the symmetry of the filter, the luma filter coefficients c_L with elements $c_L[i][j]$, $i = 0..AlfNumFilters - 1$ is derived as follows:

$$c_L[i][AlfLengthLuma - 1] = c_L[i][AlfCodedLengthLuma - 1] \quad (8-259259466)$$

$$c_L[i][AlfLengthLuma - 2 - j] = c_L[i][j] \text{ for } j = 0..AlfCodedLengthLuma - 2 \quad (8-260260467)$$

The chroma filter coefficients c_C with elements $c_C[i]$, $i = 0..AlfCodedLengthChroma - 1$ is derived as follows:

- If i is equal to `AlfCodedLengthChroma - 1`, the coefficient $c_C[i]$ is derived as

$$c_C[i] = 255 - \text{sum} - \text{alf_coeff_chroma}[i] \quad (8-261261468)$$

where

$$\text{sum} = \text{alf_coeff_chroma}[AlfCodedLengthChroma - 2] + \sum_j (\text{alf_coeff_chroma}[j] \ll 1) \quad (8-262262469)$$

with $j = 0..AlfCodedLengthChroma - 3$

- Otherwise (i is less than `AlfCodedLengthChroma - 1`),

$$c_C[i] = \text{alf_coeff_chroma}[i] \quad (8-263263470)$$

Considering the symmetry of the filter, the chroma filter coefficients c_C with elements $c_C[i]$, $i = 0..AlfLengthChroma - 1$ is derived as follows:

HEVC

$cc[i][AlfLengthChroma - 1] = cc[i][AlfCodedLengthChroma - 1]$ (8-264264471)

$cc[i][AlfLengthChroma - 2 - j] = cc[i][j]$ for $j = 0..AlfCodedLengthChroma - 2$ (8-265265472)

Formatted: Heading 4,Heading 4 Char Char,Heading 4 Char1,
Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

8.6.3.28.6.3.3 Derivation process for filter index array for luma samples

Inputs of this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit.

Output of this process is the two-dimensional filter index array of (nS)x(nS), fldx.

A variable nS is set equal to $(1 \ll \log_2 CUsSize)$ – and s' represents the luma sample array recPicture_L of the current picture.

The boundary padding process specified in subclause 8.6.3.1 is invoked with the luma location (xC, yC), the size of coding unit log2CUsSize and the chroma component index cldx set equal to 0, and the output is assigned to the luma sample array s'. [Ed. (WJ): s' is now a picture-size array, but actually CU size + appropriate margin is enough]

The filter index array fldx is specified in the follows:

- When alf_region_adaptation_flag is equal to 1, the following ordered steps apply.

1. The variables xIdx and yIdx are derived as

regionTab[16] = { 0, 1, 4, 5, 15, 2, 3, 6, 14, 11, 10, 7, 13, 12, 9, 8 } (8-266266474)
offset = 1 << (Log2MaxCUsSize - 1) (8-267267474)
xInterval = ((PicWidthInSamples_L + offset) >> Log2MaxCUsSize) + 1 >> 2 (8-268268474)
yInterval = ((PicHeightInSamples_L + offset) >> Log2MaxCUsSize) + 1 >> 2 (8-269269474)
xIdx = Min(3, Floor((xC + x) / (xInterval << Log2MaxCUsSize))) (8-270270474)
yIdx = Min(3, Floor((yC + y) / (yInterval << Log2MaxCUsSize))) (8-271271474)

2. The filter index fldx[x, y] with x, y = 0..(nS)-1 is derived as

$fldx[x][y] = regionTab[(yIdx \ll 2) + xIdx]$ (8-272272474)

- Otherwise (alf_region_flag is equal to 0), the following ordered steps apply.

3. The variables varTempH[x][y], varTempV[x][y] and varTemp1[x][y] with x, y = -1..(nS)+1 is derived as

$varTempH[x][y] = | (s'[xC+x, yC+y] \ll 1) - s'[xC+x-1, yC+y] - s'[xC+x+1, yC+y] |$ (8-273273474)
 $varTempV[x][y] = | (s'[xC+x, yC+y] \ll 1) - s'[xC+x, yC+y-1] - s'[xC+x, yC+y+1] |$ (8-274274474)
 $varTemp1[x][y] = varTempH[x][y] + varTempV[x][y]$ (8-275275474)

4. The variable varTemp2[x, y] with x, y = 0..(nS)-1 is derived as

$varTemp2[x][y] = \sum_i \sum_j varTemp1[x+i][y+j]$ with $i, j = -1..1$ (8-276276474)

5. The variables varTemp3[x, y], varTempH1[x, y] and varTempV1[x, y] with x, y = 0..(nS) - 1 >> 2 are derived as

$varTemp3[x][y] = (\sum_i \sum_j varTemp2[(x \ll 2) + i][(y \ll 2) + j]) \gg 4$ with $i, j = 0..3$ (8-277277474)
 $varTempH1[x][y] = \sum_i \sum_j varTempH[(x \ll 2) + i][(y \ll 2) + j]$ with $i, j = 0..3$ (8-278278474)
 $varTempV1[x][y] = \sum_i \sum_j varTempV[(x \ll 2) + i][(y \ll 2) + j]$ with $i, j = 0..3$ (8-279279474)

6. The variable direction is derived as

- If $varTempV1[x \gg 2][y \gg 2]$ is greater than $varTempH1[x \gg 2][y \gg 2] \ll 1$,
direction = 1
- Otherwise, if $varTempH1[x \gg 2][y \gg 2]$ is greater than $varTempV1[x \gg 2][y \gg 2] \ll 1$,

HEVC

- direction = 2
- Otherwise,
- direction = 0

7. The variable avgvar is derived as

$$\begin{aligned} \text{varTab}[16] &= \{ 0, 1, 2, 2, 2, 3, 3, 3, 3, 3, 4, 4, 4, 4, 4, 4 \} & (8-280280475) \\ \text{avgVar} &= \text{Clip3}(0, 15, (\text{varTemp3}[x \gg 2][y \gg 2] * 114) \gg (3 + \text{BitDepthY})) & (8-281281475) \end{aligned}$$

8. The filter index fIdx[x, y] with x, y = 0..(nS)-1 is derived as

$$\text{fIdx}[x][y] = \text{Clip3}(0, 4, \text{varTab}[\text{avgVar}]) + 5 * \text{direction} \quad (8-282282504)$$

8.6.3.38.6.3.4 Filtering process for luma samples

Inputs of this process are:

- a luma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left luma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit,
- a filter index array of (nS)x(nS), fIdx.

Output of this process is the filtered reconstruction of luma picture.

~~Let s' be a variable specifying luma sample array recPictureL. The boundary padding process specified in subclause 8.6.3.1 is invoked with the luma location (xC, yC), the size of coding unit log2CUsSize and the chroma component index cIdx set equal to 0, and the output is assigned to the luma sample array s'.~~ [Ed. (WJ): s' is now a picture-size array, but actually CU size + appropriate margin is enough]

A variable nS is set equal to $(1 \ll \log2CUsSize)$ and a variable alfTap is set equal to $(\text{alf_length_luma_minus_5_div2} \ll 1) + 5$.

Each sample of luma picture $\text{recFiltPicture}_L[xC + x][yC + y]$ with x, y = 0..(nS)-1, is derived as follows.

$$\begin{aligned} \text{recFiltPicture}_L[xC + x][yC + y] &= \\ c_L[\text{fIdx}[x][y]][N] &+ \sum_{i=0}^{N-1} (s''[xC + x + \text{horPos}[i], yC + y + \text{verPos}[i]] * c_L[\text{fIdx}[x][y]][i]) \end{aligned}$$

(8-283283476)

where N is set equal to AlfNumCoeffLuma-1 and horPos[i] and verPos[i] are specified in [Table 8-15Table 8-14](#) and [Table 8-16Table 8-15](#), respectively.

Table 8-158-138-12 – Specification of horPos[i] according to alfTap for adaptive loop filter process of luma samples

i	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
alfTap = 5	0	-1	0	1	-2	-1	0	1	2	-1	0	1	0	-	-	-	-	-	-	-
alfTap = 7	0	-1	0	1	-2	-1	0	1	2	-3	-2	-1	0	1	2	3	-2	-1	0	1
alfTap = 9	-1	0	1	-2	-1	0	1	2	-3	-2	-1	0	1	2	3	-4	-3	-2	-1	0


HEVC

i	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
alfTap = 5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
alfTap = 7	2	-1	0	1	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
alfTap = 9	1	2	3	4	-3	-2	-1	0	1	2	3	-2	-1	0	1	2	-1	0	1

Table 8-168-148-13 – Specification of verPos[i] according to alfTap for adaptive loop filter process of luma samples

i	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
alfTap = 5	-2	-1	-1	-1	0	0	0	0	0	1	1	1	2							
alfTap = 7	-3	-2	-2	-2	-1	-1	-1	-1	-1	0	0	0	0	0	0	1	1	1	1	1
alfTap = 9	-3	-3	-3	-2	-2	-2	-2	-2	-1	-1	-1	-1	-1	-1	-1	0	0	0	0	0

i	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
alfTap = 5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
alfTap = 7	1	2	2	2	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
alfTap = 9	0	0	0	0	1	1	1	1	1	1	1	2	2	2	2	2	3	3	3

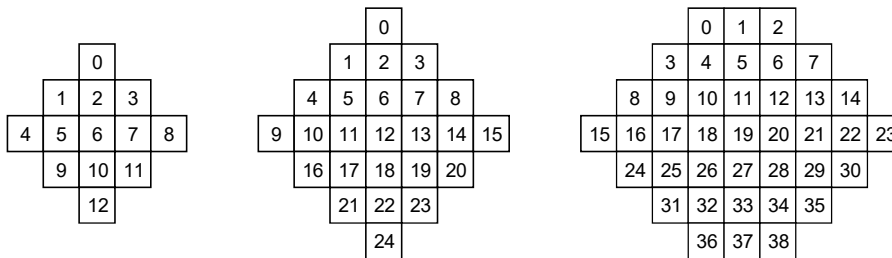

(a) alfTap = 5

(a) alfTap = 7

(a) alfTap = 9

Figure 8-8 Mapping between geometric position and luma adaptive loop filter index according to alfTap (informative)

8.6.3.48.6.3.5 Filtering process for chroma samples

Inputs of this process are:

- a chroma location (xC, yC) specifying the top-left luma sample of the current coding unit relative to the top left chroma sample of the current picture,
- a variable log2CUsSize specifying the size of the current coding unit.
- a variable cIdx specifying the chroma component index.

Output of this process is the filtered reconstruction of chroma picture.

The boundary padding process specified in subclause 8.6.3.1 is invoked with the chroma location (xC, yC), the size of coding unit log2CUsSize and the chroma component index cIdx, and the output is assigned to the luma sample array s'. [Ed. (WJ): s' is now a picture-size array, but actually CU size + appropriate margin is enough]

Let s' be a variable specifying chroma sample array which is derived as follows.

- If cIdx is equal to 1, s' represents the chroma sample array recPictureCb of the current picture and recFiltPicture represents the filtered reconstruction of chroma picture recFiltPictureCb.

HEVC

— Otherwise (eIdx is equal to 2), s' represents the chroma sample array $recPicture_{Cr}$ of the current picture and $recFiltPicture$ represents the filtered reconstruction of chroma picture $recFiltPicture_{Cr}$.

A variable nS is set equal to $(1 \ll \log_2 CUSize)$ and a variable $alfTapChroma$ is set equal to $(alf_length_chroma_minus_5_div2 \ll 1) + 5$.

Filtered samples of chroma picture $recFiltPicture[xC + x][yC + y]$ with $x, y = 0..(nS)-1$, are derived as follows.

$$recFiltPicture[xC + x][yC + y] = c_c[N] + \sum_{i=0}^{N-1} (s'[xC + x + horPos[i], yC + y + verPos[i]] * c_c[i])$$

(8-284284477)

where

$$N = AlfNumCoeffChroma - 1, \quad (8-285285478)$$

$$horPos[i] = (i \% alfTapChroma) - (alfTapChroma \gg 1), \text{ and} \quad (8-286286479)$$

$$verPos[i] = (i / alfTapChroma) - (alfTapChroma \gg 1) \quad (8-287287480)$$

Formatted: (Asian) Korean, (Other) (none)

Formatted: Normal, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

9 Parsing process

Inputs to this process are bits from the RBSP.

Outputs of this process are syntax element values.

This process is invoked when the descriptor of a syntax element in the syntax tables in subclause 7.3 is equal to $ue(v)$, $me(v)$, $se(v)$, $te(v)$ (see subclause 9.1), $ce(v)$ (see subclause 9.2), or $ae(v)$ (see subclause 9.3).

9.1 Parsing process for Exp-Golomb codes

This process is invoked when the descriptor of a syntax element in the syntax tables in subclause 7.3 is equal to $ue(v)$, $me(v)$, $se(v)$, or $te(v)$. For syntax elements in subclauses 7.3.4 and 7.3.5, this process is invoked only when `entropy_coding_mode_flag` is equal to 0.

Inputs to this process are bits from the RBSP.

Outputs of this process are syntax element values.

Syntax elements coded as $ue(v)$, $me(v)$, or $se(v)$ are Exp-Golomb-coded. Syntax elements coded as $te(v)$ are truncated Exp-Golomb-coded. The parsing process for these syntax elements begins with reading the bits starting at the current location in the bitstream up to and including the first non-zero bit, and counting the number of leading bits that are equal to 0. This process is specified as follows:

```
leadingZeroBits = -1
for( b = 0; !b; leadingZeroBits++ )
    b = read_bits( 1 )
```

(9-1)

The variable `codeNum` is then assigned as follows:

$$codeNum = 2^{leadingZeroBits - 1} + read_bits(leadingZeroBits) \quad (9-2)$$

where the value returned from `read_bits( leadingZeroBits )` is interpreted as a binary representation of an unsigned integer with most significant bit written first.

Table 9-1 Table 9-4 illustrates the structure of the Exp-Golomb code by separating the bit string into "prefix" and "suffix" bits. The "prefix" bits are those bits that are parsed in the above pseudo-code for the computation of `leadingZeroBits`, and are shown as either 0 or 1 in the bit string column of Table 9-1 Table 9-4. The "suffix" bits are those bits that are parsed in the computation of `codeNum` and are shown as x_i in Table 9-1 Table 9-4, with i being in the range 0 to `leadingZeroBits - 1`, inclusive. Each x_i can take on values 0 or 1.

HEVC

Table 9-19-1 – Bit strings with "prefix" and "suffix" bits and assignment to codeNum ranges (informative)

Bit string form	Range of codeNum
1	0
0 1 x ₀	1..2
0 0 1 x ₁ x ₀	3..6
0 0 0 1 x ₂ x ₁ x ₀	7..14
0 0 0 0 1 x ₃ x ₂ x ₁ x ₀	15..30
0 0 0 0 0 1 x ₄ x ₃ x ₂ x ₁ x ₀	31..62
...	...

Table 9-2 illustrates explicitly the assignment of bit strings to codeNum values.

Table 9-29-2 – Exp-Golomb bit strings and codeNum in explicit form and used as ue(v) (informative)

Bit string	codeNum
1	0
0 1 0	1
0 1 1	2
0 0 1 0 0	3
0 0 1 0 1	4
0 0 1 1 0	5
0 0 1 1 1	6
0 0 0 1 0 0 0	7
0 0 0 1 0 0 1	8
0 0 0 1 0 1 0	9
...	...

Depending on the descriptor, the value of a syntax element is derived as follows.

- If the syntax element is coded as ue(v), the value of the syntax element is equal to codeNum.
- Otherwise, if the syntax element is coded as se(v), the value of the syntax element is derived by invoking the mapping process for signed Exp-Golomb codes as specified in subclause 9.1.1 with codeNum as the input.
- Otherwise, if the syntax element is coded as me(v) [Ed. (TW): insert text]
- Otherwise (the syntax element is coded as te(v)), the range of possible values for the syntax element is determined first. The range of this syntax element may be between 0 and x, with x being greater than or equal to 1 and the range is used in the derivation of the value of the syntax element value as follows.
 - If x is greater than 1, codeNum and the value of the syntax element is derived in the same way as for syntax elements coded as ue(v).
 - Otherwise (x is equal to 1), the parsing process for codeNum which is equal to the value of the syntax element is given by a process equivalent to:

b = read_bits(1)

codeNum = !b

(9-3)

HEVC

9.1.1 Mapping process for signed Exp-Golomb codes

Input to this process is codeNum as specified in subclause 9.1.

Output of this process is a value of a syntax element coded as se(v).

The syntax element is assigned to the codeNum by ordering the syntax element by its absolute value in increasing order and representing the positive value for a given absolute value with the lower codeNum. Table 9-3Table 9-3 provides the assignment rule.

Table 9-39-3 – Assignment of syntax element to codeNum for signed Exp-Golomb coded syntax elements se(v)

codeNum	syntax element value
0	0
1	1
2	−1
3	2
4	−2
5	3
6	−3
k	$(-1)^{k+1} \text{Ceil}(k \div 2)$

9.2 CAVLC parsing process for slice data

This process is invoked when the descriptor of a syntax element in the syntax tables in subclause 7.3 is equal to ce(v).

Inputs to this process are bits from the RBSP.

Outputs of this process are syntax element values.

9.2.1 Parsing process for VLC codes

Inputs to this process are bits from the RBSP and the parameter vlcNum specifying the VLC code. If vlcNum is equal to 14, inputs to this process additionally include a parameter cMax.

Output of this process is the variable codeNum specifying an integer value to be used when deriving syntax elements.

If vlcNum is not equal to 8 or 11, and is less than 14, the parsing process for the VLC codes begins with reading the bits starting at the current location in the bitstream up to and including the first non-zero bit, and counting the number of leading bits that are equal to 0. This process is specified as follows.

leadingZeroBits = −1
for(b = 0; !b; leadingZeroBits++)
 b = read_bits(1)

(9-4)

Depending on the value of vlcNum, the value of codeNum is assigned as follows.

- If vlcNum is equal to 0,

– If leadingZeroBits is less than or equal to 6,

codeNum = leadingZeroBits

(9-5)

– Otherwise (leadingZeroBits is greater than 6),

numBits = leadingZeroBits − 6

(9-6)

codeNum = 5 + (1<< numBits) + read_bits(numBits)

– Otherwise, if vlcNum is less than 5,

– If leadingZeroBits is less than or equal to 6,

codeNum = (leadingZeroBits << vlcNum) + read_bits(vlcNum)

(9-7)
- HEVC
- 156 of 230

- Otherwise (leadingZeroBits is greater than 6),

(9-8)

```

numBits = leadingZeroBits - 6 + vlcNum
codeNum = 5*(1<<vlcNum) + (1<<numBits) + read_bits( numBits)

```
- Otherwise, if vlcNum is less than 8,

(9-9)

```

codeNum = (leadingZeroBits << (vlcNum - 4)) + read_bits( vlcNum - 4)

```
- Otherwise, if vlcNum is equal to 8,

(9-10)

```

b = read_bits(1)
codeNum = b ? 2 - read_bits(1) : 0

```
- Otherwise, if vlcNum is equal to 9,
 - If leadingZeroBits is equal to 0,

(9-11)

```

b = read_bits(1)
if (b) {
    b = read_bits(1)
    if (b) {
        codeNum = 3 + read_bits(3)
    }
    else {
        b = read_bits(1)
        codeNum = b ? 1 + read_bits(1) : 0
    }
}

```
 - Otherwise (leadingZeroBits is greater than 0),

(9-12)

```

codeNum = (leadingZeroBits << 4) + read_bits( 4) + 11

```
- Otherwise, if vlcNum is equal to 10,

(9-13)

```

codeNum = (1<<leadingZeroBits) - 1 + read_bits( leadingZeroBits )

```
- Otherwise, if vlcNum is equal to 11,

(9-14)

```

codeNum = read_bits(3)
if( codeNum ) {
    b = read_bits(1)
    codeNum = (codeNum << 1) + b -1
}

```
- Otherwise, if vlcNum is equal to 12,

(9-15)

```

codeNum = (leadingZeroBits << 6) + read_bits( 6 )

```
- Otherwise, if vlcNum is equal to 13,

(9-16)

```

codeNum = (leadingZeroBits << 4) + read_bits( 4 )

```
- Otherwise, if vlcNum is equal to 14,

(9-17)

```

leadingZeroBits = -1
for( b = 0; !b && leadingZeroBits < cMax; leadingZeroBits++ )
    b = read_bits( 1 )
codeNum = leadingZeroBits

```
- Otherwise, if vlcNum is equal to 15, codeNum is determined according to Table 9-4.
- Otherwise, if vlcNum is equal to 16

(9-18)

```

codeNum = read_bits(3)
if( codeNum >= 6)
    codeNum = 7 - codeNum
else if (codeNum > 0) {
    b = read_bits( 1 )
    codeNum = 13 - (codeNum << 1) - b
}
else {
    b = read_bits( 2 )

```

HEVC

```

        codeNum = 15 - b
    }
-   Otherwise, if vlcNum is equal to 17
    codeNum = read_bits(3)
    if( codeNum ) {
        b = read_bits(1)
        codeNum = 16 - (codeNum << 1) - b
    }
-   Otherwise, if vlcNum is equal to 18
    codeNum = read_bits(3)
    if( codeNum && codeNum < 4) {
        b = read_bits(1)
        codeNum = 8 - (codeNum << 1) - b
    } else if (codeNum < 6) {
        b = read_bits(2)
        codeNum = 30 - (codeNum << 2) - b
    } else {
        b = read_bits(3)
        codeNum = (codeNum << 3) + b
        if (codeNum < 62)
            codeNum = 76 - codeNum
        else {
            b = read_bits(1)
            codeNum = 156 - (codeNum << 1) - b
        }
    }
-   Otherwise, if vlcNum is equal to 19
    codeNum = read_bits(3)
    if( codeNum && codeNum < 3) {
        b = read_bits(1)
        codeNum = 6 - (codeNum << 1) - b
    } else {
        b = read_bits(2)
        codeNum = (codeNum << 2) + b
        if (codeNum < 25)
            codeNum = 29 - codeNum
        else {
            b = read_bits(1)
            codeNum = 81 - (codeNum << 1) - b
        }
    }
}

```

Table 9-49-4 – codeNum and codeword with vlcNum equal to 15

codeNum	Codeword
0	0
1	11
2	1001
3	1011
4	1000
5	10100
6	101010
7	101011

9.2.2 Initialisation process

Outputs of this process are initialised CAVLC internal variables.

HEVC

The processes in subclauses 9.2.2.2 through 9.2.2.6 are invoked when starting the parsing of the slice data of a slice in subclause 7.3.4.

9.2.2.1 Counter initialisation for codeword index adaptive mapping

Outputs of this process are initial values of counters that are used for parsing a syntax element.

If the number of counters used for a syntax element is N (N>0), values of the N counters are all initialized to 0. For each set of counters used for parsing a syntax element, there is an associated value, counterSum, to store the number of counter increments since its previous reset. The value of counterSum is also initialized to 0.

9.2.2.2 Initialisation process for lastPosVlcNumIndex

Outputs of this process are initial values of the variable array lastPosVlcNumIndex.

The variable array lastPosVlcIndex is initialized as follows.

lastPosVlcNumIndex [blockType] = 0, for blockType = 0...7 (9-222224)

9.2.2.3 Initialisation process for lastPosTable

Outputs of this process are initial values of the variable array lastPosTable.

The variable array lastPosTable is initialized as specified in Table 9-5.

Table 9-59-5 – Specification of initial values of lastPosTable[tableNum][codeNum]

	codeNum															
tableNum	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0	0	1	2	3	5	4	7	6	11	8	14	9	16	15	10	13
1	0	1	2	5	7	4	6	3	9	12	11	8	10	14	13	15
2	0	1	2	5	7	4	6	3	9	12	11	8	10	14	13	15

	codeNum															
tableNum	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0	12	17	18	19	22	31	23	21	27	20	25	30	24	26	28	29
1	16	17	21	22	25	18	28	23	30	26	20	19	27	24	29	31
2	16	17	21	22	25	18	28	23	30	26	20	19	27	24	29	31

9.2.2.4 Initialisation process for splitPredPartModeTable

Outputs of this process are initial values of the variable array splitPredPartModeTable and associated counters.

The variable array splitPredPartModeTable is initialized as follows:

- For each cuDepth with a value from 0 to (Log2MaxCUSize – Log2MinCUSize), set splitPredPartModeTable[cuDepth][codeNum] equal to codeNum, with codeNum = 0...6.

For each cuDepth with a value from 0 to (Log2MaxCUSize – Log2MinCUSize), there are four counters used for codeword index adaptive mapping. These counters are initialized according to subclause 9.2.2.1.

9.2.2.5 Initialisation process for intraModeTable

Outputs of this process are initial values of the variable array intraModeTable.

The variable array intraModeTable is initialized as specified in Table 9-6.

Table 9-69-6 – Specification of intraModeTable[k][codeNum]

	codeNum																
k	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
0	0	15	11	10	13	7	9	4	14	2	3	6	8	5	12	1	
1	14	10	9	0	13	7	2	8	3	12	6	4	11	1	5		
2	2	0	29	30	20	1	21	28	15	7	16	8	11	31	22	19	32
3	2	1	28	0	29	20	27	19	51	21	7	14	10	11	30	31	18

	codeNum																
k	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
2	10	27	14	4	18	12	23	17	24	26	5	25	5	9	3	13	
3	16	26	8	17	4	22	9	23	6	25	13	24	12	3	5		

9.2.2.6 Initialisation process for cbpSplitTransTable

Outputs of this process are initial values of the variable array cbpSplitTransTable and associated counters.

The values of the variable array cbpSplitTransTable[k][n] are initialized as specified in Table 9-7 where the values of k = 0...5 and n = 0,1. The number of counters used in each case for codeword index adaptive mapping is defined in Table 9-16. These counters are initialized according to subclause 9.2.2.1.

Table 9-79-7 – Specification of initial values of cbpSplitTransTable[flagPattern-8][n][codeNum]

	k (n = 0)						k (n = 1)					
codeNum	0	1	2	3	4	5	0	1	2	3	4	5
0	14	2	3	6	4	4	0	2	0	0	0	0
1	13	3	1	4	7	7	1	3	2	5	4	4
2	12	1	0	5	0	0	3	0	1	4	5	5
3	10	0	2	7	5	5	7		3	7	6	6
4	6			0	6	6	2			6	1	1
5	11			1	1	1	4			2	7	7
6	9			2	2	2	5			3	2	2
7	8			3	3	3	8			1	3	3
8	5						9					
9	4						11					
10	2						6					
11	7						10					
12	3						12					
13	1						13					
14	0						14					

9.2.3 Codeword index mapping update process

Inputs to this process are a VLC codeword index mapping table indexMappingTable that provides the mapping between VLC codeword indexes and syntax element values, a codeword index value codeNum, and a value counterNum that specifies the number of counters used. If counterNum is not equal to 0, inputs additionally include an array counterArray indexed from 0 to (counterNum-1) that saves the value of counters, a value counterSum that saves the number of all counter increments since its previous reset.

Outputs of this process are indexMappingTable, and if counterNum is not equal to 0 counterArray and counterSum with updated values.

HEVC

The process is specified in the following ordered steps:

- Syntax element value syntaxVal is set equal to indexMappingTable [codeNum].
- If codeNum is not less than 1, codeNumPre is set equal to (codeNum-1). Otherwise, codeNumPre is set equal to codeNum. Syntax element value syntaxValPre is set equal to indexMappingTable [codeNumPre].
- If codeNum is greater or equal to counterNum, the values of indexMappingTable[codeNumPre] and indexMappingTable[codeNum] are exchanged with each other. No further step is carried out. Otherwise
 - The value of counterArray[codeNum] is increased by 1.
 - If counterArray[codeNum] >= counterArray[codeNumPre], the counter values of counterArray[codeNum] and counterArray[codeNumPre] are swapped, and the values of indexMappingTable [codeNumPre] and indexMappingTable [codeNum] are also swapped.
 - If counterSum is not less than 15, the value of counterSum is reset to 0. For i = 0...(counterNum-1), counterArray[i] is set equal to (counterArray[i]>>1).
 - Otherwise, the value of counterSum is increased by 1.

9.2.4 Parsing process for transform coefficient syntax elements

This process is invoked when parsing syntax elements with descriptor equal to ce(v) in subclause 7.3.11 and 7.3.12 and when entropy_coding_mode_flag is equal to 0.

Inputs to this process are bits from RBSP, and the variables log2TrafoSize and cIdx, and the variable arrays lastPosVlcNumIndex and lastPosTable.

Outputs of this process are CAVLC syntax elements last_pos_level_one, level_minus2_and_sign, run_level_one, and level, and the variable arrays lastPosTable and lastPosVlcNumIndex.

9.2.4.1 Parsing process for last_pos_level_one

Inputs to this process are bits from RBSP and the variable arrays lastPosVlcNumIndex and lastPosTable.

Output of this process is the syntax element last_pos_level_one, the variables trOne and vlcNumLevel, and the variable arrays lastPosVlcNumIndex and lastPosTable.

The parsing process for last_pos_level_one is specified as follows.

- The variable N is set equal to $(1 \ll \log_2 \text{TrafoSize}) \gg (\text{cIdx} > 0 ? 2 : 0)$.
- If N is greater than 4, last_pos_level_one is derived in the following ordered steps:
 1. The variable blockType is derived as

$$\text{blockType} = (\text{cIdx} == 0 ? (\text{PredMode} == \text{MODE_INTRA} ? 0 : \text{slice_type} + 1) + (N > 8 ? 5 : 2) : \text{cIdx} - 1) \quad (9-23)$$
 2. The variable vlcNumIndex is derived as

$$\text{vlcNumIdx} = \text{Min}(16, \text{lastPosVlcNumIndex}[\text{blockType}]) \quad (9-24)$$
 3. The variable vlcNum is derived as

$$\text{vlcNum} = \text{lastPosVlcNumTable}[\text{blockType}][\text{vlcNumIdx}] \quad (9-25)$$

The values of the array lastPosVlcNumTable are shown in Table 9-8.
 4. The parsing process described in subclause 9.2.1 is invoked with vlcNum as input and the variable codeNum as output.
 5. The variable lastPos is derived as follows

$$\begin{aligned} &\text{if } (\text{codeNum} \leq N + N * N) \\ &\quad \text{if } (\text{codeNum} \neq 0 \ \&\& \ (\text{codeNum} \ \& \ (N - 1)) = 0) \\ &\quad \quad \text{lastPos} = (\text{codeNum} \gg \text{Log}_2(N)) - 1 \\ &\quad \text{else} \\ &\quad \quad \text{lastPos} = \text{codeNum} - (\text{codeNum} \gg \text{Log}_2(N)) \\ &\quad \text{else} \\ &\quad \quad \text{lastPos} = \text{codeNum} - N * N \end{aligned} \quad (9-26)$$
 6. The variable levelGreaterThanOneFlag is derived as

HEVC

$$\text{levelGreaterThanOneFlag} = (\text{codeNum} > (N + N*N)) \mid \mid (\text{codeNum} \neq 0 \ \&\& \ (\text{codeNum} \ \& \ (N-1))) \quad (9-27)$$

7. The syntax element `last_pos_level_one` is derived as

$$\text{last_pos_level_one} = \text{levelGreaterThanOneFlag} ? \text{codeNum} + N : \text{codeNum} \quad (9-28)$$

8. The variable array `lastPosVlcNumIndex[blockType]` is updated as follows.

$$\begin{aligned} &\text{if } ((N == 8 ? \text{codeNum} : \text{codeNum} >> 2) < \text{lastPosVlcNumIndex}[\text{blockType}]) \\ &\quad \text{lastPosVlcNumIndex}[\text{blockType}] -= 1 \\ &\text{else if } ((N == 8 ? \text{codeNum} : \text{codeNum} >> 2) > \text{lastPosVlcNumIndex}[\text{blockType}]) \\ &\quad \text{lastPosVlcNumIndex}[\text{blockType}] += 1 \end{aligned} \quad (9-29)$$

– Otherwise, (N equal to 4), `last_pos_level_one` is derived in the following ordered steps:

1. The parsing process described in subclause 9.2.1 is invoked with 2 as input and the variable `codeNum` as output.

2. The variable `tableNum` is derived as

$$\text{tableNum} = (\text{PredMode} == \text{MODE_INTRA} \mid \mid \text{cIdx} > 0) ? 0 : \text{slice_type} + 1 \quad (9-30)$$

3. The syntax element `last_pos_level_one` is derived as

$$\text{last_pos_level_one} = \text{lastPosTable}[\text{tableNum}][\text{codeNum}] \quad (9-31)$$

4. The variable array `lastPosTable[tableNum]` is updated by invoking process 9.2.3 with `lastPosTable[tableNum]`, `codeNum` and 0 as inputs.

– The variable `trOne` is derived as

$$\text{trOne} = ! \text{levelGreaterThanOneFlag} \quad (9-32)$$

– The variable `vlcNumLevel` is set equal to 0

Table 9-89-89-8 – Specification of `lastPosVlcNumTable[blockType][vlcNumIdx]`

	vlcNumIdx																
blockType	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
0	10	10	10	10	2	2	2	7	9	9	9	9	9	4	4	4	4
1	10	10	10	10	10	2	9	9	9	9	9	9	9	4	4	4	4
2	2	2	2	2	2	7	7	7	7	7	7	7	7	7	4	4	13
3	2	2	2	2	7	7	7	7	7	7	7	7	7	7	7	7	13
4	2	2	2	2	7	7	7	7	7	7	7	7	7	7	7	7	13
5	10	10	10	4	4	4	4	12	12	12	12	12	12	12	12	12	12
6	10	10	10	10	4	4	12	12	12	12	12	12	12	12	12	12	12
7	10	10	10	10	4	4	12	12	12	12	12	12	12	12	12	12	12

9.2.4.2 Parsing process for `level_minus2_and_sign`

Input to this process are bits from slice data.

Output of this process is `level_minus2_and_sign`.

The syntax element `level_minus2_and_sign` is derived by invoking the parsing process of subclause 9.2.1 with 0 as input and `level_minus2_and_sign` as output.

9.2.4.3 Parsing process for `run_level_one`

Inputs to this process are bits from slice data, the scan position `n` of the previous non-zero transform coefficient in inverse scan order, and the variable `TrOne`.

Outputs of this process are the syntax element `run_level_one` and the variable `TrOne`.

The value of `run_level_one` is derived as follows.

– The variable `N` is set equal to $(1 \ll \log_2 \text{TrafoSize}) \gg (\text{cIdx} > 0 ? 2 : 0)$.

– The variable `blockType` is derived as

HEVC

$$\text{blockType} = (\text{cIdx} == 0 ? (\text{PredMode} == \text{MODE_INTRA} ? 0 : \text{slice_type} + 1) + (\text{N} > 8 ? 5 : 2) : \text{cIdx} - 1) \quad (9-33)$$

- The variable `tableIdx` is derived as

$$\text{tableIdx} = (\text{blockType} == 2 \parallel \text{blockType} == 5) ? (\text{N} \leq 8 ? 0 : 1) : (\text{N} \leq 8 ? 2 : 3) \quad (9-34)$$

- The variable `maxRun` is set equal to `n`.
- The variable `maxRunIdx` is set equal to `Min(28, maxRun)`.
- The variable `vlcNum` is derived from `tableIdx` and `maxRunIdx` as shown in Table 9-9.
- The parsing process described in subclause 9.2.1 is invoked with `vlcNum` as input and the variable `codeNum` as output. If `blockType` is equal to 2 or `blockType` is equal to 5, the value of `run_level_one` is derived as follows.
 - If `N` is equal to 4, the variable `largeOnePos` is derived from `trOne` and `maxRunIdx` as shown in Table 9-10.
 - Otherwise (`N` is greater than 4), the variable `largeOnePos` is derived from `trOne` and `maxRunIdx` as shown in Table 9-11.
 - The variables `levelGreaterThanOneFlag` and `runOfZeros` are derived as follows.

```

if ( largeOnePos > 0 ) {
    if( codeNum < min(largeOnePos, maxRunIdx + 2 ) ) {
        levelGreaterThanOneFlag = 0
        runOfZeros = codeNum
    } else if( codeNum < (maxRunIdx << 1 ) + 4 - largeOnePos ) {
        if( (codeNum + largeOnePos) & 1 ) {
            levelGreaterThanOneFlag = 0
            runOfZeros = (codeNum + largeOnePos - 1) >> 1
        } else {
            levelGreaterThanOneFlag = 1
            runOfZeros = (codeNum - largeOnePos) >> 1
        }
    } else {
        levelGreaterThanOneFlag = 1
        runOfZeros = codeNum - maxRunIdx - 2
    }
} else {
    if( codeNum & 1 ) {
        levelGreaterThanOneFlag = 0
        runOfZeros = (codeNum - 1) >> 1
    } else {
        runOfZeros = codeNum >> 1
        levelGreaterThanOneFlag = ((codeNum >> 1) <= maxRunIdx) ? 1 : 0
    }
}

```

- The syntax element `run_level_one` is derived as

$$\text{run_level_one} = \text{levelGreaterThanOneFlag} ? \text{runOfZeros} + \text{maxRun} : \text{runOfZeros} \quad (9-36)$$
- Otherwise (`blockType` is not equal to 2 and `blockType` is not equal to 5), the value of `run_level_one` is derived as follows.

- The variable `levelGreaterThanOneFlag` is derived as

$$\text{levelGreaterThanOneFlag} = \text{codeNum} \leq \text{maxRun} + 1 ? 0 : 1 \quad (9-37)$$

- If `maxRun` is less than 28, the variable `runOfZeros` is derived from `maxRun` and `codeNum` as shown in Table 9-12.

- Otherwise (`maxRun` is not less than 28), the variable `runOfZeros` is derived as

$$\text{runOfZeros} = \text{codeNum} \leq \text{maxRun} + 1 ? \text{codeNum} : \text{codeNum} - \text{maxRun} - 2 \quad (9-38)$$

- The syntax element `run_level_one` is derived as

$$\text{run_level_one} = \text{levelGreaterThanOneFlag} ? \text{runOfZeros} + n : \text{runOfZeros} \quad (9-39)$$

- The variable `trOne` is derived as

HEVC

$$\text{trOne} = (\text{trOne} == 0 \mid \mid \text{levelGreaterThanOneFlag}) ? 0 : \text{Max}(4, \text{trOne} + 1) \quad (9-40)$$

Table 9-99-99-9 – Derivation of vlcNum from tableIdx and maxRunIdx

	maxRunIdx														
tableIdx	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
0	8	0	0	5	5	5	5	5	5	5	6	6	6	6	6
1	8	0	0	5	5	5	5	5	5	5	6	6	6	6	6
2	8	0	0	0	0	5	5	5	5	5	5	5	5	5	5
3	8	0	1	1	1	1	2	2	2	2	2	2	2	6	6

	maxRunIdx														
tableIdx	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
0	6	6	6	6	6	6	6	6	6	6	6	6	6	3	6
1	6	6	6	6	6	6	6	6	6	6	6	6	6	3	6
2	5	5	5	1	1	1	1	1	1	1	1	1	1	2	5
3	6	6	6	6	3	3	3	3	3	3	3	3	3	3	6

Table 9-109-109-10 – Derivation of largeOnePos from tableIdx and maxRunIdx when N is equal to 4

	maxRunIdx														
trOne	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0
1	2	3	4	5	6	5	6	7	7	7	7	7	6	4	2
2	2	2	2	3	3	3	3	4	4	4	3	3	3	2	NA
3	2	1	1	2	2	2	2	2	2	2	2	2	1	NA	NA
4	1	1	1	1	1	1	1	1	1	1	1	1	NA	NA	NA

Table 9-119-119-11 – Derivation of largeOnePos from tableIdx and maxRunIdx when N is greater than 4

	maxRunIdx														
trOne	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
0	0	1	2	2	2	2	2	4	5	5	6	6	6	6	6
1	2	4	4	6	6	8	8	10	11	13	15	13	14	15	16
2	2	3	4	5	4	5	6	6	7	8	8	9	9	10	10
3	2	1	2	2	3	3	4	4	5	5	5	6	6	7	7
4	2	1	2	2	2	2	3	3	3	3	4	4	4	4	4

	maxRunIdx														
trOne	15	16	17	18	19	20	21	22	23	24	25	26	27	28	
0	6	7	8	7	8	8	9	10	10	10	12	10	9	8	
1	18	18	21	20	21	22	23	25	25	26	27	28	29	27	
2	11	11	12	13	14	15	16	16	17	18	19	20	19	19	
3	7	8	9	9	10	10	11	11	12	12	13	13	13	13	
4	5	5	5	5	5	6	6	6	6	6	6	7	7	8	

HEVC

Table 9-129-129-12 – Derivation of runOfZeros from maxRun and codeNum

	codeNum%(maxRun+1)														
maxRun	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
0	1	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1	2	1	0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
2	3	0	2	1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
3	4	1	0	2	3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
4	5	0	3	2	4	1	NA	NA	NA	NA	NA	NA	NA	NA	NA
5	6	0	1	4	5	3	2	NA	NA	NA	NA	NA	NA	NA	NA
6	7	1	0	2	4	3	6	5	NA	NA	NA	NA	NA	NA	NA
7	8	0	3	4	2	1	5	7	6	NA	NA	NA	NA	NA	NA
8	9	0	5	1	6	4	8	3	2	7	NA	NA	NA	NA	NA
9	10	0	1	6	7	2	9	5	4	3	8	NA	NA	NA	NA
10	11	1	0	2	3	6	7	4	5	8	10	9	NA	NA	NA
11	12	0	3	2	1	4	6	5	7	11	8	9	10	NA	NA
12	13	0	1	5	6	4	2	3	7	8	12	10	11	9	NA
13	14	0	1	7	2	8	6	5	3	4	13	12	9	11	10
14	15	0	1	2	8	3	9	7	6	4	5	14	10	13	12
15	16	0	1	2	3	4	8	7	5	9	6	10	15	11	13
16	17	0	3	1	2	4	5	8	9	7	6	10	11	12	16
17	18	0	1	5	2	6	4	3	7	8	9	10	17	13	14
18	19	0	1	7	8	2	6	3	9	4	5	10	18	15	16
19	20	0	9	1	10	2	8	3	7	4	16	17	6	19	5
20	21	0	1	10	2	11	3	9	5	4	17	20	18	8	7
21	22	1	0	2	3	4	10	11	5	6	9	7	12	8	13
22	23	0	3	4	2	1	5	7	6	10	11	8	9	12	13
23	24	0	5	6	1	4	3	7	2	8	10	11	9	12	15
24	25	0	7	1	8	6	5	2	9	10	4	11	3	12	17
25	26	0	1	9	10	2	8	11	7	3	6	5	12	4	19
26	27	0	1	11	2	10	12	3	9	7	8	4	6	20	13
27	28	0	1	2	12	3	4	11	13	9	5	8	10	7	6

	codeNum%(maxRun+1)													
maxRun	15	16	17	18	19	20	21	22	23	24	25	26	27	28
0	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
2	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
3	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
5	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
6	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
8	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
9	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
10	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
11	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

HEVC

12	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
13	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
14	11	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
15	14	12	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
16	13	14	15	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
17	12	15	11	16	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
18	14	11	13	17	12	NA	NA	NA	NA	NA	NA	NA	NA	NA
19	11	15	12	14	13	18	NA	NA	NA	NA	NA	NA	NA	NA
20	6	12	16	13	15	19	14	NA	NA	NA	NA	NA	NA	NA
21	18	21	17	19	14	20	16	15	NA	NA	NA	NA	NA	NA
22	14	22	18	15	19	20	17	16	21	NA	NA	NA	NA	NA
23	14	13	23	16	19	17	18	21	20	22	NA	NA	NA	NA
24	16	13	24	18	19	15	20	23	14	21	22	NA	NA	NA
25	13	18	20	14	17	25	21	16	23	24	15	22	NA	NA
26	5	14	26	21	19	18	25	15	16	17	24	22	23	NA
27	21	14	27	15	22	19	16	20	17	26	18	25	23	24

9.2.4.4 Parsing process for level

Inputs to this process are bits from slice data and the variable vlcNumLevel.

Outputs of this process are the syntax element level and the variable vlcNumLevel.

- The syntax element level is determined by invoking the parsing process described in subclause 9.2.1 with vlcNumLevel as input and level as output.
- The variable vlcNumLevel derived in the following ordered steps updated as follows.
 1. The variable vlcIdx is set equal to $\text{vlcIdx} = \text{Min}(3, \text{vlcNumLevel})$
 2. The variable levelThreshold is derived from vlcIdx as shown in Table 9-13.
 3. The variable vlcNumLevel is derived as

$$\text{vlcNumLevel} = \text{vlcNumLevel} + (\text{level} > \text{levelThreshold} \&\& \text{vlcNumLevel} < 4 ? 1 : 0) \quad (9-41)$$

Table 9-139-13 – Derivation of levelThreshold from vlcIdx

vlcIdx	levelThreshold
0	4
1	6
2	14
3	28

9.2.4.5 Parsing process for cu_split_pred_part_mode

This process is invoked when entropy_coding_mode_flag is equal to 0 for parsing syntax element **cu_split_pred_part_mode** in subclause 7.3.5.

Inputs to this process are bits from slice data, splitPredPartModeTable.

Output of this process is the syntax element cu_split_pred_part_mode.

The value of cu_split_pred_part_mode is derived as follows.

- If log2CUSize is greater than Log2MinCUSize, the parsing process described in subclause 9.2.1 is invoked with vlcNum of 14 and cMax of 6 as inputs and the variable codeNum as output.
- Otherwise, the parsing process described in subclause 9.2.1 is invoked with vlcNum of 14 and cMax of 5 as inputs and the variable codeNum as output.
- The syntax element cu_split_pred_part_mode is derived as

HEVC

cu_split_pred_part_mode = splitPredPartModeTable[Log2MaxCUsSize – log2CUsSize][codeNum] (9-424241)

- If log2CUsSize is equal to Log2MinCUsSize and cu_split_part_mode has a value of 5, PredMode and PartMode are determined as follows
 1. Read one bit and assign its value to a variable b
 2. If b is equal to 1, set PredMode to MODE_INTRA and PartMode to PART_2Nx2N
 3. Otherwise, read the next one bit and assign its value to the variable b.
 - if b is equal to 1, set PredMode to MODE_INTRA and PartMode to PART_NxN
 - Otherwise, set PredMode to MODE_INTER and PartMode to PART_NxN
- The variable array splitPredPartModeTable[Log2MaxCUsSize – log2CUsSize] is updated by invoking process 9.2.3 with splitPredPartModeTable[Log2MaxCUsSize – log2CUsSize], codeNum and a value of 4 as inputs.

9.2.4.6 Parsing process for rem_intra_luma_pred_mode

This process is invoked when entropy_coding_mode_flag is equal to 0 for parsing syntax element rem_intra_luma_pred_mode in subclause 7.3.7.

Inputs to this process are bits from slice data, a variable puSize specifying the size of the current prediction unit, NumMPMCand and a variable array intraModeTable.

Outputs of this process are the syntax element rem_intra_luma_pred_mode and value-updated intraModeTable.

The value of rem_intra_luma_pred_mode is derived as follows.

- Based on the input puSize, the value of a variable intraPredModeNum indicating the number of intra prediction modes for the given size of prediction unit is obtained according to [Table 7-12Table 7-11](#).
- If intraPredModeNum is equal to 3, read one bit and assign its value to rem_intra_luma_pred_mode. No further step is carried out. Otherwise,
- The values of variable k and vlcNum are obtained as follows
 - If intraPredModeNum is equal to 17
 - If NumMPMCand is equal to 1, set vlcNum equal to 16 and k equal to 0.
 - Otherwise, set vlcNum equal to 17 and k equal to 1.
 - If intraPredModeNum is equal to 34
 - If NumMPMCand is equal to 1, set vlcNum equal to 18 and k equal to 2.
 - Otherwise, set vlcNum equal to 19 and k equal to 3.
 - The parsing process described in subclause 9.2.1 is invoked with vlcNum as input and the variable codeNum as output.
 - The value of rem_intra_luma_pred_mode is set equal to intraModeTable[k][codeNum].
 - The value of a variable counterNum is set to 0. The variable array intraModeTable[k] is updated by invoking process in subclause 9.2.3 with intraModeTable[k], codeNum and counterNum as inputs.

9.2.4.7 Parsing process for cbp_and_split_transform

This process is invoked when entropy_coding_mode_flag is equal to 0 for parsing syntax element cbp_and_split_transform in subclause 7.3.8.

Inputs to this process are bits from slice data, a variable cbpVlcNumIdx, trafoDepth and a variable array cbpSplitTransTable.

Outputs of this process are the syntax element cbp_and_split_transform and value-updated cbpVlcNumIndex and cbpSplitTransTable.

The value of cbp_and_split_transform is derived as follows.

- Obtain a 4-bit value flagPattern according to subclause 7.4.8.
- Derive the value of a variable k according to Table 9-16.
- Set the value of a variable n as

$$n = (\text{PredMode} == \text{MODE_INTRA} ? 0 : 1) \quad (9-43)$$

HEVC

- Obtain a value of vlcNum as follows
 - If flagPattern is equal to 8,

$$\text{vlcNum} = (n == 0 ? \text{cbpVlcNumTable}[\text{cbpVlcNumIdx}]:11) \quad (9-44)$$
 - Otherwise, if flagPattern is equal to 11, 13 or 15 and n is equal to 0, set vlcNum to 15;
 - Otherwise, set vlcNum to 14.
- If vlcNum is equal to 14, obtain the value of a variable cMax according to Table 9-15.
- The parsing process described in subclause 9.2.1 is invoked with vlcNum and cMax as inputs and the variable codeNum as output.
- Set the value of cbp_and_split_transform equal to cbpSplitTransTable[k][n][codeNum]
- If flagPattern is not equal to 10 or 12, a variable counterNum is obtained according to Table 9-16 and the variable array cbpSplitTransTable[k][n] is updated by invoking process 9.2.3 with cbpSplitTransTable[k][n], codeNum and counterNum as inputs.
- If flagPattern is equal to 8 and n is equal to 0, the value of cbpVlcNumIdx is updated as follows

$$\begin{aligned} &\text{if}(\text{codeNum} < \text{cbpVlcNumIdx}) \\ &\quad \text{cbpVlcNumIdx} -= 1 \\ &\text{else if}(\text{codeNum} > \text{cbpVlcNumIdx}) \\ &\quad \text{cbpVlcNumIdx} += 1 \end{aligned} \quad (9-45)$$
- If flagPattern is equal to 15, the exact values of Cb and Cr in Table 7-14 are determined as follows.
 - The parsing process described in subclause 9.2.1 is invoked with vlcNum of 14 and cMax of 2 as inputs and the variable codeNum as output.
 - Set the value of variable b as

$$b = n ? (\text{codeNum} + 1) : (3 - \text{codeNum}) \quad (9-46)$$
 - The values of Cb and Cr are set equal to

$$\text{Cb} = (b \gg 1) \quad (9-47)$$

$$\text{Cr} = (b \& 0x01) \quad (9-48)$$

Table 9-149-149-14 – Specification of cbpVlcNumTable[cbpVlcNumIdx]

cbpVlcNumIdx	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
vlcNum	1	2	2	2	11	11	11	11	11	11	11	11	11	11	11

Table 9-159-159-15 – Derivation of cMax from flagPattern and n

n	flagPattern			
	9	10, 12	11,13,15	14
0	3	3	-	7
1	2	3	6	7

Table 9-169-169-16 – Specification of cbpSplitTransTable and counterNum associated

flagPattern	8	9	10, 12	11, 13, 15	14 (trafoDepth=0)	14 (trafoDepth>0)
k	0	1	2	3	4	5
counterNum	2	3	0	4	4	4

HEVC

9.3 CABAC parsing process for slice data

[Ed. (TW) needs to be extended]

This process is invoked when parsing syntax elements with descriptor `ae(v)` in subclauses 7.3.4 and 7.3.5 when `entropy_coding_mode_flag` is equal to 1.

Inputs to this process are a request for a value of a syntax element and values of prior parsed syntax elements.

Output of this process is the value of the syntax element.

When starting the parsing of the slice data of a slice in subclause 7.3.4, the initialisation process of the CABAC parsing process is invoked as specified in subclause 9.3.1.

The parsing of syntax elements proceeds as follows:

For each requested value of a syntax element a binarization is derived as described in subclause 9.3.2.

The binarization for the syntax element and the sequence of parsed bins determines the decoding process flow as described in subclause 9.3.2.109.3.3.

For each bin of the binarization of the syntax element, which is indexed by the variable `binIdx`, a context index `ctxIdx` is derived as specified in subclause 9.3.3.1.

For each `ctxIdx` the arithmetic decoding process is invoked as specified in subclause 9.3.3.2.

The resulting sequence (`b0..bbinIdx`) of parsed bins is compared to the set of bin strings given by the binarization process after decoding of each bin. When the sequence matches a bin string in the given set, the corresponding value is assigned to the syntax element.

In case the request for a value of a syntax element is processed for the syntax element `mb_type` and the decoded value of `mb_type` is equal to `I_PCM`, the decoding engine is initialised after the decoding of any `pcm_alignment_zero_bit` and all `pcm_sample_luma` and `pcm_sample_chroma` data as specified in subclause 9.3.1.2.

9.3.1 Initialisation process

Outputs of this process are initialised CABAC internal variables.

The processes in subclauses 9.3.1.1 and 9.3.1.2 are invoked when starting the parsing of the slice data of a slice in subclause 7.3.4.

9.3.1.1 Initialisation process for context variables

Outputs of this process are the initialised CABAC context variables indexed by `ctxIdx`.

Table 9-18 Tables 9-5 to Table 9-43 9-26 contain the values of the variables `n` and `m` used in the initialisation of context variables that are assigned to all syntax elements in subclauses 7.3.4 to 7.3.10 except for the end-of-slice flag and those related to CAVLC.

For each context variable, the two variables `pStateIdx` and `valMPS` are initialised.

NOTE 1 – The variable `pStateIdx` corresponds to a probability state index and the variable `valMPS` corresponds to the value of the most probable symbol as further described in subclause 9.3.3.2.

The two values assigned to `pStateIdx` and `valMPS` for the initialisation are derived from `SliceQPY`, which is derived in Equation $\text{SliceQP}_Y = 26 + \text{pic_init_qp_minus26} + \text{slice_qp_delta}(7-127-9)$. Given the two table entries (`m`, `n`), the initialisation is specified by the following pseudo-code process:

```
preCtxState = Clip3( 1, 126, ( ( m * Clip3( 0, 51, SliceQPY ) ) >> 4 ) + n )
if( preCtxState <= 63 ) {
    pStateIdx = 63 - preCtxState
    valMPS = 0
} else {
    pStateIdx = preCtxState - 64
    valMPS = 1
}
```

In Table 9-17 Table 9-4, the `ctxIdxTable` and the `ctxIdx` for which initialisation is needed for each of the slice types are listed. The referenced context index tables `ctxIdxTable` include the values of `m` and `n` needed for the initialisation.

HEVC

Table 9-179-179-17 – Association of ctxIdx and syntax elements for each slice type in the initialisation process

	Syntax element	ctxIdxTable	Slice Type		
			I	P	B
slice_header()	alf_cu_flag	Table 9-18Table 9-5	0 2	3..5	6..8
coding_tree()	split_coding_unit_flag	Table 9-19Table 9-6	0..2	3..5	6..8
coding_unit()	skip_flag	Table 9-20Table 9-7		0..2	3..5
	cu_qp_delta	Table 9-21Table 9-8	0..3	4..7	8..11
	pred_type	Table 9-22Table 9-9	0	1..4	5..9
prediction_unit()	prev_intra_luma_pred_flag	Table 9-23Table 9-10	0	1	2
	rem_intra_luma_pred_mode	Table 9-24Table 9-11	0	1	2
	intra_chroma_pred_mode	Table 9-25Table 9-12	0..3	4..7	8..11
	merge_flag	Table 9-26Table 9-13		0..2	3..5
	merge_idx	Table 9-27Table 9-14		0..3	4..7
	inter_pred_flag	Table 9-28Table 9-15			0..2
	ref_idx_lc, ref_idx_l0, ref_idx_l1	Table 9-29Table 9-16		0..5	6..11
	mvd_l0[][][0]	Table 9-30Table 9-17		0..6	14..20
	mvd_lc[][][0], mvd_l1[][][0]	Table 9-30Table 9-17			14..20
	mvd_l0[][][1]	Table 9-30Table 9-17		7..13	21..27
	mvd_lc[][][1]	Table			21..2

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

	], mvd_11[][][1]	Table 9-30T able 9-17				7													
	mvp_idx_lc, mvp_idx_l0, mvp_idx_l1	Table 9-31T able 9-18		0..1		2..3													
transform_tree()	no_residual_data_flag	Table 9-32T able 9-19		0..3		4..7													
	split_transform_flag	Table 9-33T able 9-20	0..3	4..7		8..11													
	cbf_luma	Table 9-34T able 9-21	0..3	4..7		8..11													
	cbf_cb	Table 9-35T able 9-22	0..3	4..7		8..11													
	cbf_cr	Table 9-36T able 9-23	0..3	4..7		8..11													
residual_coding()	last_significant_coeff_x	Table 9-37T able 9-24	0..40	41..81		82..122													
	last_significant_coeff_y	Table 9-38T able 9-25	0..40	41..81		82..122													
	needs_update	Table 9-39T Table 9-26	Table 9-40T Table 9-27				Table 9-41T Table 9-32												
significant_coeff_flag			Table 9-42T Table 9-33																

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt, Highlight

Formatted: Font: Times New Roman, 8 pt, English (United Kingdom), Highlight

Formatted: Font: 8 pt, Highlight

Formatted Table

HEVC

				Table 9-40	
				Table 9-27	
	coeff_abs_level_greater1_flag	0..79	80..159		160..239
	coeff_abs_level_greater2_flag	0..79	80..159		160..239

Formatted: Font: 8 pt

Formatted: Keep with next

Formatted: Font: 8 pt

NOTE 2 – ctxIdxTable equal to 0 and ctxIdx equal to 0 are associated with the end_of_slice_flag. The decoding process specified in subclause 9.3.3.2.4 applies to ctxIdxTable equal to 0 and ctxIdx equal to 0. This decoding process, however, may also be implemented by using the decoding process specified in subclause 9.3.3.2.1. In this case, the initial values associated with ctxIdxTable equal to 0 and ctxIdx equal to 0 are specified to be pStatIdx = 63 and valMPS = 0, where pStatIdx = 63 represents a non-adapting probability state.

Table 9-189-189-18 – Values of variables m and n for alf_cu_flag ctxIdx

Initialisation variables	alf_cu_flag ctxIdx								
	0	1	2	3	4	5	6	7	8
m	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64

Table 9-199-199-19 – Values of variables m and n for split_coding_unit_flag ctxIdx

Initialisation variables	split_coding_unit_flag ctxIdx								
	0	1	2	3	4	5	6	7	8
m	-7	-10	-10	-14	-6	-6	-14	-7	-10
n	68	87	105	71	73	91	71	74	92

Table 9-209-209-20 – Values of variables m and n for skip_flag ctxIdx

Initialisation variables	skip_flag ctxIdx					
	0	1	2	3	4	5
m	0	0	0	0	0	0
n	64	64	64	64	64	64

Table 9-219-219-21 – Values of variables m and n for cu_qp_delta ctxIdx

Initialisation variables	cu_qp_delta flag ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64

HEVC

Table 9-229-229-22 – Values of variables m and n for pred_type ctxIdx

Initialisation variables	pred_type ctxIdx									
	0	1	2	3	4	5	6	7	8	9
m	0	-25	-1	-3	6	6	-1	13	-11	-11
n	73	89	64	63	78	50	56	53	76	70

Table 9-239-239-23 – Values of variable m and n for prev_intra_luma_pred_flag ctxIdx

Initialisation variables	prev_intra_luma_pred_flag ctxIdx		
	0	1	2
m	2	0	0
n	54	50	51

Table 9-249-249-24 – Values of variable m and n for rem_intra_luma_pred_mode ctxIdx

Initialisation variables	rem_intra_luma_pred_mode ctxIdx		
	0	1	2
m	-3	-2	1
n	65	61	55

Table 9-259-259-25 – Values of variable m and n for intra_chroma_pred_mode ctxIdx

Initialisation variables	intra_chroma_pred_mode ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64

Table 9-269-269-26 – Values of variable m and n for merge_flag ctxIdx

Initialisation variables	merge_flag ctxIdx					
	0	1	2	3	4	5
m	0	0	0	0	0	0
n	64	64	64	64	64	64

Table 9-279-279-27 – Values of variable m and n for merge_idx ctxIdx

Initialisation variables	merge_idx ctxIdx							
	0	1	2	3	4	5	6	7
m	0	0	0	0	1	6	-7	-4
n	64	64	64	64	65	42	75	72

HEVC

Table 9-289-289-28 – Values of variable m and n for inter_pred_flag ctxIdx

Initialisation variables	inter_pred_flag ctxIdx		
	0	1	2
m	-2	-5	-9
n	58	70	85

Table 9-299-299-29 – Values of variable m and n for ref_idx_lc, ref_idx_l0, ref_idx_l1 ctxIdx

Initialisation variables	ref_idx_lc, ref_idx_l0, ref_idx_l1 ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	-6	-10	-8	-17	1	0	-9	-9	-9	-12	-18	0
n	59	75	75	96	59	64	55	71	76	86	55	64

Table 9-309-309-30 – Values of variable m and n for mvd_lc, mvd_l0, mvd_l1 ctxIdx

Initialisation variables	mvd_lc, mvd_l0, mvd_l1 ctxIdx													
	0	1	2	3	4	5	6	7	8	9	10	11	12	13
m	5	-2	-7	14	16	6	9	2	-3	-10	14	17	6	8
n	61	79	89	39	49	60	71	63	78	94	37	46	60	73
	14	15	16	17	18	19	20	21	22	23	24	25	26	27
m	1	-4	-10	11	14	4	7	1	-4	-10	11	15	5	8
n	67	83	97	49	56	69	77	65	81	96	48	52	67	76

Table 9-319-319-31 – Values of variable m and n for mvp_idx_lc, mvp_idx_l0, mvp_idx_l1 ctxIdx

Initialisation variables	mvp_idx_lc, mvp_idx_l0, mvp_idx_l1 ctxIdx			
	0	1	2	3
m	0	0	0	0
n	64	64	64	64

Table 9-329-329-32 – Values of variable m and n for no_residual_data_flag ctxIdx

Initialisation variables	no_residual_data_flag ctxIdx							
	0	1	2	3	4	5	6	7
m	-14	-12	-8	-25	-26	-16	-14	-27
n	72	86	78	128	88	91	87	132

Table 9-339-339-33 – Values of variable m and n for split_transform_flag ctxIdx

Initialisation variables	split_transform_flag ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	0	12	22	-2	0	-28	-30	-34	-11	-31	-42	-47
n	64	12	4	49	13	89	99	106	38	88	118	130

HEVC

Table 9-349-349-34 – Values of variable m and n for cbf_luma ctxIdx

Initialisation variables	cbf_luma ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	-22	-5	-16	-16	-18	-41	-29	-23	-11	-32	-19	-16
n	116	75	112	111	98	120	117	108	80	83	89	85

Table 9-359-359-35 – Values of variable m and n for cbf_cb ctxIdx

Initialisation variables	cbf_cb ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	-35	-12	-9	-10	-46	-42	-11	-19	-22	-48	-7	-37
n	116	61	73	75	114	119	74	90	52	123	68	121

Table 9-369-369-36 – Values of variable m and n for cbf_cr ctxIdx

Initialisation variables	cbf_cr ctxIdx											
	0	1	2	3	4	5	6	7	8	9	10	11
m	-29	-12	-5	-6	-43	-41	-17	-25	-19	-48	-21	-9
n	104	59	65	67	107	118	86	101	45	123	94	73

HEVC

Table 9-379-379-37 – Values of variable m and n for last_significant_coefficient_x ctxIdx

Initialisation variables	last significant coeff v ctxIdx														
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
m	19	12	16	22	12	12	12	5	16	15	17	17	19	19	4
n	19	36	34	18	35	35	32	46	21	20	13	14	10	12	37
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
m	13	22	27	26	18	6	12	34	38	24	14	41	45	56	30
n	22	-4	-19	-12	6	27	10	-33	-42	-15	7	7	1	-9	22
	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
m	14	23	19	25	29	29	19	10	12	-2	-37	15	14	15	25
n	40	24	32	26	10	4	20	37	38	60	114	29	36	41	8
	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59
m	26	25	21	12	18	25	32	32	29	24	13	27	40	42	40
n	4	10	16	34	21	1	-12	-15	-11	-5	12	6	-32	-39	-39
	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74
m	45	43	45	38	15	11	11	26	28	21	15	27	29	23	-1
n	-51	-51	-56	-46	-6	-4	-4	29	29	46	45	17	12	15	57
	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89
m	6	22	31	37	43	43	48	15	14	15	25	26	25	21	12
n	65	17	-4	-25	-44	-46	-44	29	36	41	8	4	10	16	34
	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104
m	18	25	32	32	29	24	13	27	40	42	40	45	43	45	38
n	21	1	-12	-15	-11	-5	12	6	-32	-39	-39	-51	-51	-56	-46
	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
m	15	11	11	26	28	21	15	27	29	23	-1	6	22	31	37
n	-6	-4	-4	29	29	46	45	17	12	15	57	65	17	-4	-25
	120	121	122												
m	43	43	48												
n	-44	-46	-44												

HEVC

Table 9-389-389-38 – Values of variable m and n for last_significant_coeff_y ctxIdx

Initialisation variables	last significant coeff y ctxIdx														
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
m	19	12	16	22	12	12	12	5	16	15	17	17	19	19	4
n	19	36	34	18	35	35	32	46	21	20	13	14	10	12	37
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
m	13	22	27	26	18	6	12	34	38	24	14	41	45	56	30
n	22	-4	-19	-12	6	27	10	-33	-42	-15	7	7	1	-9	22
	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
m	14	23	19	25	29	29	19	10	12	-2	-37	15	14	15	25
n	40	24	32	26	10	4	20	37	38	60	114	29	36	41	8
	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59
m	26	25	21	12	18	25	32	32	29	24	13	27	40	42	40
n	4	10	16	34	21	1	-12	-15	-11	-5	12	6	-32	-39	-39
	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74
m	45	43	45	38	15	11	11	26	28	21	15	27	29	23	-1
n	-51	-51	-56	-46	-6	-4	-4	29	29	46	45	17	12	15	57
	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89
m	6	22	31	37	43	43	48	15	14	15	25	26	25	21	12
n	65	17	-4	-25	-44	-46	-44	29	36	41	8	4	10	16	34
	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104
m	18	25	32	32	29	24	13	27	40	42	40	45	43	45	38
n	21	1	-12	-15	-11	-5	12	6	-32	-39	-39	-51	-51	-56	-46
	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
m	15	11	11	26	28	21	15	27	29	23	-1	6	22	31	37
n	-6	-4	-4	29	29	46	45	17	12	15	57	65	17	-4	-25
	120	121	122												
m	43	43	48												
n	-44	-46	-44												

HEVC

Table 9-399-399-39 – Values of variable m and n for significant_coeff_flag ctxIdx (A)

Initialisation variables	significant coeff flag ctxIdx															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
m	-22	-14	-17	-26	5	-2	-32	-19	-7	-24	0	-1	2	0	-15	0
n	128	96	99	113	31	65	125	72	69	111	25	49	54	64	97	64
	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
m	-4	0	-4	-5	17	2	-8	1	2	-11	6	5	2	0	-8	0
n	88	68	75	74	7	56	80	36	52	85	12	41	54	65	82	64
	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
m	-8	-7	-7	-9	-18	-7	-11	-29	4	-14	-26	2	5	6	-22	0
n	95	77	73	74	77	72	81	92	47	83	79	46	50	52	104	64
	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
m	-7	-5	-6	-8	5	3	-18	-10	0	-11	-3	8	4	-1	-7	0
n	93	79	79	79	36	56	99	59	56	84	31	35	51	66	81	64

Table 9-409-409-40 – Values of variable m and n for significant_coeff_flag ctxIdx (B)

Initialisation variables	significant coeff flag ctxIdx															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
m	-22	-14	-17	-26	5	-2	-32	-19	-7	-24	0	-1	2	0	-15	0
n	128	96	99	113	31	65	125	72	69	111	25	49	54	64	97	64
	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
m	-4	0	-4	-5	17	2	-8	1	2	-11	6	5	2	0	-8	0
n	88	68	75	74	7	56	80	36	52	85	12	41	54	65	82	64
	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
m	-8	-7	-7	-9	-18	-7	-11	-29	4	-14	-26	2	5	6	-22	0
n	95	77	73	74	77	72	81	92	47	83	79	46	50	52	104	64
	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
m	-7	-5	-6	-8	5	3	-18	-10	0	-11	-3	8	4	-1	-7	0
n	93	79	79	79	36	56	99	59	56	84	31	35	51	66	81	64

HEVC

Table 9-419-419-41 – Values of variable m and n for significant_coeff_flag ctxIdx (C)

Initialisation variables	significant_coeff_flag ctxIdx															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
m	-34	-20	-23	38	3	-4	-17	-9	-4	-16	-1	0	-1	-12	-14	0
n	146	108	111	41	34	69	103	50	66	97	24	50	61	90	97	64
	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
m	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
n	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
m	-12	-4	-8	-7	15	2	-10	4	-10	-9	-9	6	3	-1	-14	0
n	99	75	81	80	13	57	85	27	75	81	46	41	56	69	96	64
	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
m	-7	-22	-12	-35	-5	-16	-9	-26	-28	-38	-3	-25	-9	6	-15	0
n	85	102	79	121	55	88	78	73	99	123	35	97	75	54	92	64
	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
m	-9	-14	-4	-14	7	3	-7	-8	-7	-8	-2	4	1	-5	-10	0
n	94	94	74	92	37	57	78	54	70	78	31	49	60	75	87	64

HEVC

Table 9-429-429-42 – Values of variable m and n for coeff_abs_level_greater1_flag ctxIdx

Initialisation variables	coeff abs level greater1 flag ctxIdx														
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
m	-11	-20	-16	-13	-10	-5	-8	-8	-3	-9	0	-5	-12	-9	-1
n	87	64	68	71	73	67	26	37	36	56	63	39	56	57	52
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
m	-4	-19	-28	-23	-3	-2	-27	-22	-14	-1	-10	-22	-13	-6	-5
n	72	73	88	85	59	72	97	89	77	58	86	74	63	57	63
	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
m	-4	16	9	5	-7	-6	-13	-12	-18	-14	-5	-8	-22	-35	-3
n	70	-2	23	41	67	63	-5	42	53	59	65	36	67	89	47
	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59
m	-12	-20	-51	-44	-23	-1	-58	-71	-67	-91	-1	20	13	2	5
n	77	66	113	109	84	64	127	143	134	187	64	-3	21	46	48
	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74
m	-4	29	1	-6	-9	-6	23	3	-5	5	-12	-2	-15	-11	-3
n	71	-5	45	58	67	66	-7	26	42	31	79	45	67	62	54
	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89
m	-4	-13	-3	-26	-18	-9	-30	-24	-43	-6	4	34	21	14	5
n	70	68	100	91	84	83	103	90	122	66	59	-11	10	25	44
	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104
m	-4	40	19	-11	-6	-11	12	17	-6	11	-11	1	-26	-28	-2
n	69	-33	8	65	59	68	-2	-10	34	14	70	27	71	79	47
	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
m	6	-23	-47	-55	-21	1	-38	-34	-45	10	9	41	32	14	17
n	47	67	107	117	83	59	82	77	95	25	46	-31	-17	19	18
	120	129	130	131	132	133	134	135	136	137	138	139	140	141	142
m	-2	18	10	-2	-7	-6	19	-5	-7	-4	-23	-3	2	-32	-16
n	65	22	33	55	64	67	11	50	53	54	99	51	41	102	79
	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149
m	-8	-21	-26	-33	-4	-31	-34	-25	-43	-6	3	23	12	11	8
n	77	84	91	104	61	122	110	96	124	70	60	12	30	33	40
	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164
m	-2	40	0	-5	7	-39	31	1	-35	-32	-15	16	-43	-75	-8
n	66	-20	46	54	37	116	-27	22	82	85	72	0	102	152	55
	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179
m	-9	-12	-84	-93	25	-104	-40	-51	110	3	17	55	28	-5	29
n	68	54	171	186	12	222	92	93	-169	52	33	-45	1	55	-4

HEVC

Table 9-439-439-43 – Values of variable m and n for coeff_abs_level_greater2_flag ctxIdx

Initialisation variables	coeff abs level greater2 flag ctxIdx														
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
m	-12	-10	-11	-14	-35	-10	-1	-17	-5	-22	-13	-2	-13	-21	-3
n	72	79	87	94	136	58	54	86	70	105	70	59	81	96	73
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
m	-24	-19	-1	1	-17	-7	-20	-11	-27	-12	-9	-8	-4	-3	-9
n	90	88	63	60	97	69	95	84	110	96	72	76	75	76	94
	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44
m	-11	-4	-9	-24	-24	-18	-10	-19	-28	6	-12	-17	-8	-44	-17
n	65	66	82	107	111	58	61	82	97	47	50	73	66	115	86
	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59
m	-26	-4	-43	-58	-51	-51	-85	-47	-95	-65	-2	7	-2	3	4
n	74	48	115	141	137	117	176	120	202	159	53	43	67	62	67
	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74
m	-2	-13	-11	-13	-24	-4	-17	-16	-19	-28	-12	-11	-18	-6	-19
n	49	81	82	88	112	44	77	82	89	110	64	70	88	67	97
	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89
m	-17	-27	-18	-13	-17	-11	-15	-10	-10	-12	-8	-7	-6	-8	-9
n	76	100	88	84	94	73	83	77	80	91	63	71	73	80	90
	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104
m	14	-7	-4	-8	-50	2	11	-4	-41	-60	-12	-6	1	-5	-12
n	20	68	66	76	148	22	15	49	117	149	49	55	44	58	73
	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
m	13	5	-29	0	-23	-12	6	35	42	22	24	11	2	-5	4
n	9	26	101	46	92	57	30	-4	-24	24	0	34	61	75	62
	120	129	130	131	132	133	134	135	136	137	138	139	140	141	142
m	0	-6	-7	-31	-25	-20	-14	-20	-21	-6	-19	-34	-27	-7	-7
n	43	65	71	117	109	76	73	88	92	71	73	108	101	69	75
	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149
m	-18	-7	-20	-9	-7	-26	-13	-6	-12	-2	-3	-6	-7	-6	-11
n	77	64	91	75	78	98	81	69	83	70	50	66	73	75	91
	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164
m	19	2	4	-4	-32	13	-29	-64	-90	26	-24	8	-10	-16	-27
n	10	49	52	69	114	-1	85	143	186	4	68	30	61	78	96
	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179
m	31	-12	-15	-68	31	-8	-32	-36	-53	36	26	19	-22	5	8
n	-16	54	70	158	12	44	63	81	106	12	-5	17	101	54	53

9.3.1.2 Initialisation process for the arithmetic decoding engine

This process is invoked before decoding the first treeblock of a slice.

Outputs of this process are the initialised decoding engine registers codIRange and codIOffset both in 16 bit register precision.

The status of the arithmetic decoding engine is represented by the variables codIRange and codIOffset. In the initialisation procedure of the arithmetic decoding process, codIRange is set equal to 510 and codIOffset is set equal to the value returned from read_bits(9) interpreted as a 9 bit binary representation of an unsigned integer with most significant bit written first.

The bitstream shall not contain data that result in a value of codIOffset being equal to 510 or 511.

NOTE – The description of the arithmetic decoding engine in this Recommendation | International Standard utilizes 16 bit register precision. However, a minimum register precision of 9 bits is required for storing the values of the variables codIRange and

HEVC

codlOffset after invocation of the arithmetic decoding process (DecodeBin) as specified in subclause 9.3.3.2. The arithmetic decoding process for a binary decision (DecodeDecision) as specified in subclause 9.3.3.2.1 and the decoding process for a binary decision before termination (DecodeTerminate) as specified in subclause 9.3.3.2.4 require a minimum register precision of 9 bits for the variables codlRange and codlOffset. The bypass decoding process for binary decisions (DecodeBypass) as specified in subclause 9.3.3.2.3 requires a minimum register precision of 10 bits for the variable codlOffset and a minimum register precision of 9 bits for the variable codlRange.

9.3.2 Binarization process

Input to this process is a request for a syntax element.

Output of this process is the binarization of the syntax element, maxBinIdxCtx, ctxIdxOffset, and bypassFlag.

Table 9-31 specifies the type of binarization process, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset associated with each syntax element.

The specification of the unary (U) binarization process, the truncated unary (TU) binarization process, the Rice (R) binarization process, the truncated Rice (TR), the concatenated unary / k-th order Exp-Golomb (UEGk) binarization process, the concatenated truncated Rice / k-th order Exp-Golomb (TREGk) binarization process, and the fixed-length (FL) binarization process are given in subclauses 9.3.2.4 to 9.3.2.6, respectively. Other binarizations are specified in subclauses 9.3.2.7 to 9.3.2.10.

The binarizations for the syntax element coeff_abs_level_minus3 as specified in subclause 9.3.2.10 consist of bin strings given by a concatenation of prefix and suffix bit strings. The UEGk binarization as specified in subclause 9.3.2.3, which is used for the binarization of the syntax elements mvd_IX (X = 0, 1 C) also consist of a concatenation of prefix and suffix bit strings. For these binarization processes, the prefix and the suffix bit string are separately indexed using the binIdx variable as specified further in subclause 9.3.3. The two sets of prefix bit strings and suffix bit strings are referred to as the binarization prefix part and the binarization suffix part, respectively.

Associated with each binarization or binarization part of a syntax element is a specific value of the context index table (ctxIdxTable) variable and the related context index offset (ctxIdxOffset) variable and a specific value of the maxBinIdxCtx variable as given in Error! Reference source not found, Table 9-27. When two values for each of these variables are specified for one syntax element in Error! Reference source not found, Table 9-27, the value in the upper row is related to the prefix part while the value in the lower row is related to the suffix part of the binarization of the corresponding syntax element.

The use of the DecodeBypass process and the variable bypassFlag is derived as follows.

- If no value is assigned to ctxIdxOffset for the corresponding binarization or binarization part in Error! Reference source not found, Table 9-27 labelled as "na", all bins of the bit strings of the corresponding binarization or of the binarization prefix/suffix part are decoded by invoking the DecodeBypass process as specified in subclause 9.3.3.2.3. In such a case, bypassFlag is set equal to 1, where bypassFlag is used to indicate that for parsing the value of the bin from the bitstream the DecodeBypass process is applied.
- Otherwise, for each possible value of binIdx up to the specified value of maxBinIdxCtx given in Error! Reference source not found, Table 9-27, a specific value of the variable ctxIdx is further specified in subclause 9.3.3. bypassFlag is set equal to 0.

The possible values of the context index ctxIdx vary depending on the value of ctxIdxTable. The value assigned to ctxIdxOffset specifies the lower value of the range of ctxIdx assigned to the corresponding binarization or binarization part of a syntax element.

ctxIdxTable = 0 and ctxIdx = ctxIdxOffset = 0 are assigned to the syntax element end_of_slice_flag as further specified in subclause 9.3.3.1. For parsing the value of the corresponding bin from the bitstream, the arithmetic decoding process for decisions before termination (DecodeTerminate) as specified in subclause 9.3.3.2.4 is applied.

Table 9-449-449-44 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset

Syntax element		Type of binarization	maxBinIdxCtx	ctxIdxTable	ctxIdxOffset
alf_cu_flag	I	FL, cMax = 1	0	Table 9-18Table 9-5	0
	P		0	Table 9-18Table 9-5	3
	B		0	Table 9-18Table 9-5	6
end_of_slice_flag	all	FL, cMax = 1	0	0	0
split_coding_unit_flag	I	FL, cMax = 1	0	Table 9-19Table 9-6	0
	P		0	Table 9-19Table 9-6	3
	B		0	Table 9-19Table 9-6	6
skip_flag	P	FL, cMax = 1	0	Table 9-20Table 9-7	0
	B		0	Table 9-20Table 9-7	3
cu_qp_delta	I	as specified in subclause 9.3.2.7	2	Table 9-21Table 9-8	0
	P		2	Table 9-21Table 9-8	4
	B		2	Table 9-21Table 9-8	8
pred_type	I	as specified in subclause 9.3.2.8	0	Table 9-22Table 9-9	0
	P		3	Table 9-22Table 9-9	1
	B		4	Table 9-22Table 9-9	5
pcm_flag	all	FL, cMax = 1	0	0	0
prev_intra_luma_pred_flag	I	FL, cMax = 1	0	Table 9-23Table 9-10	0
	P		0	Table 9-23Table 9-10	1
	B		0	Table 9-23Table 9-10	2
rem_intra_luma_pred_mode	I	as specified in subclause 9.3.2.9	0	Table 9-24Table 9-11	0
	P		0	Table 9-24Table 9-11	1
	B		0	Table 9-24Table 9-11	2
intra_chroma_pred_mode (4 <= IntraPredMode < 34)	I	TU, cMax = 3	3	Table 9-25Table 9-12	0
	P		3	Table 9-25Table 9-12	4
	B		3	Table 9-25Table 9-12	8
intra_chroma_pred_mode (4 <= IntraPredMode < 34)	I	TU, cMax = 4	4	Table 9-25Table 9-12	0
	P		4	Table 9-25Table 9-12	4

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-449 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset

Syntax element		Type of binarization	maxBinIdx Ctx	ctxIdxTable	ctxIdxOffset
	B		4	Table 9-25Table 9-12	8
merge_flag	P	FL, cMax = 1	0	Table 9-26Table 9-13	0
	B		0	Table 9-26Table 9-13	3
merge_idx	P	TU, cMax = NumMergeCand	3	Table 9-27Table 9-14	0
	B		3	Table 9-27Table 9-14	4
inter_pred_flag	B	FL, cMax = 1	0	Table 9-28Table 9-15	0
ref_idx_lc	B	TU, cMax = num_ref_idx_IC_active_minus1	1	Table 9-29Table 9-16	6
ref_idx_l0	P	TU, cMax = num_ref_idx_l0_active_minus1	1	Table 9-29Table 9-16	0
	B		1	Table 9-29Table 9-16	6
ref_idx_l1	B	TU, cMax = num_ref_idx_l1_active_minus1	1	Table 9-29Table 9-16	6
mvd_l0[][][0]	P	prefix and suffix as given by UEG3 with signedValFlag=1, uCoff=9	prefix: 4 suffix: na	prefix: Table 9-30Table 9-17 suffix: na	prefix: 0 suffix: na, (uses Decode Bypass)
mvd_l0[][][1]	P		prefix: 4 suffix: na	prefix: Table 9-30Table 9-17 suffix: na	prefix: 7 suffix: na, (uses Decode Bypass)
mvd_l0[][][0], mvd_lc[][][0], mvd_l1[][][0]	B		prefix: 4 suffix: na	prefix: Table 9-30Table 9-17 suffix: na	prefix: 15 suffix: na, (uses Decode Bypass)
mvd_l0[][][1], mvd_lc[][][1], mvd_l1[][][1]	B		prefix: 4 suffix: na	prefix: Table 9-30Table 9-17 suffix: na	prefix: 21 suffix: na, (uses Decode Bypass)
mvp_idx_lc	B	TU, cMax = NumMVPCand(LcToLx)	1	Table 9-31Table 9-18	2
mvp_idx_l0	P	TU, cMax = NumMVPCand(L0)	1	Table 9-31Table 9-18	0
	B		1	Table 9-31Table 9-18	2
mvp_idx_l1	B	TU, cMax = NumMVPCand(L1)	1	Table 9-31Table 9-18	2
no_residual_data_flag	P	FL, cMax = 1	0	Table 9-32Table 9-19	0
	B		0	Table 9-32Table 9-19	4
split_transform_flag	I	FL, cMax = 1	0	Table 9-33Table 9-20	0

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-449 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset

Syntax element		Type of binarization	maxBinIdxCtx	ctxIdxTable	ctxIdxOffset
	P		0	Table 9-33Table 9-20	4
	B		0	Table 9-33Table 9-20	8
cbf_luma	I	FL, cMax = 1	0	Table 9-34Table 9-21	0
	P		0	Table 9-34Table 9-21	4
	B		0	Table 9-34Table 9-21	8
cbf_cb	I	FL, cMax = 1	0	Table 9-35Table 9-22	0
	P		0	Table 9-35Table 9-22	4
	B		0	Table 9-35Table 9-22	8
cbf_cr	I	FL, cMax = 1	0	Table 9-36Table 9-23	0
	P		0	Table 9-36Table 9-23	4
	B		0	Table 9-36Table 9-23	8
last_significant_coeff_x	I	TU, cMax = (1 << log2TrafoSize) – 1	30	Table 9-37Table 9-24	0
	P		30	Table 9-37Table 9-24	41
	B		30	Table 9-37Table 9-24	82

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-449-44 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset

Syntax element		Type of binarization	maxBinIdx Ctx	ctxIdxTable	ctxIdxOffset
last_significant_coeff_y	I	$TU, cMax = (\lceil \log_2 TrafoSize \rceil) - 1$	30	Table 9-38 Table 9-25	0
	P		30	Table 9-38 Table 9-25	41
	B		30	Table 9-38 Table 9-25	82
significant_coeff_flag	I	FL, cMax = 1	0	Table 9-39 Table 9-26	0
	P		0	Table 9-39 Table 9-27	0
	B		0	Table 9-41 Table 9-28	0
coeff_abs_level_greater1_flag	I	FL, cMax = 1	0	Table 9-42 Table 9-29	0
	P		0	Table 9-42 Table 9-29	60

Formatted: Table Text, Centered, Keep with next

HEVC

Table 9-449-449-44 – Syntax elements and associated types of binarization, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset

Syntax element		Type of binarization	maxBinIdxCtx	ctxIdxTable	ctxIdxOffset
	B		0	Table 9-42Table 9-29	120
coeff_abs_level_greater2_flag	I	FL, cMax = 1	0	Table 9-43Table 9-30	0
	P		0	Table 9-43Table 9-30	60
	B		0	Table 9-43Table 9-30	120
coeff_abs_level_minus3	all	prefix and suffix as specified in subclause 9.3.2.10	prefix: na suffix: na	prefix: na suffix: na	prefix: na, (uses Decode Bypass) suffix: na, (uses Decode Bypass)
coeff_sign_flag	all	FL, cMax = 1	na	na	na, (uses Decode Bypass)

[Ed. (BB): The TU binarization for last_significant_coeff_x and last_significant_coeff_y is using 0s and a terminating 1 instead of using 1s and a terminating 0.]

9.3.2.1 Unary (U) binarization process

Input to this process is a request for a U binarization for a syntax element.

Output of this process is the U binarization of the syntax element.

The bin string of a syntax element having (unsigned integer) value synElVal is a bit string of length synElVal + 1 indexed by binIdx. The bins for binIdx less than synElVal are equal to 1. The bin with binIdx equal to synElVal is equal to 0.

Table 9-45Table 9-35 illustrates the bin strings of the unary binarization for a syntax element.

Table 9-459-459-45 – Bin string of the unary binarization (informative)

Value of syntax element	Bin string					
0 (1_NxN)	0					
1	1	0				
2	1	1	0			
3	1	1	1	0		
4	1	1	1	1	0	
5	1	1	1	1	1	0
...						
binIdx	0	1	2	3	4	5

9.3.2.2 Truncated unary (TU) binarization process

Input to this process is a request for a TU binarization for a syntax element and cMax.

Output of this process is the TU binarization of the syntax element.

HEVC

For syntax element (unsigned integer) values less than cMax, the U binarization process as specified in subclause 9.3.2.4 is invoked. For the syntax element value equal to cMax the bin string is a bit string of length cMax with all bins being equal to 1.

NOTE – TU binarization is always invoked with a cMax value equal to the largest possible value of the syntax element being decoded.

9.3.2.3 Truncated Rice (TR) binarization process

Input to this process is a request for a TR binarization for a syntax element, cRiceParam and cTRMax.

Output of this process is the TR binarization of the syntax element.

A TR bin string is a concatenation of a prefix bit string and a suffix bit string. The prefix of the binarization is specified by invoking the TU binarization process for the prefix part of the value specified by synElVal >> cRiceParam with cMax = cTRMax >> cRiceParam. The suffix of the TR bin string is the binary representation of synElVal – ((synElVal >> cRiceParam) << cRiceParam).

NOTE – For the input parameter cRiceParam = 0 the TR binarization is exactly the TU binarization.

9.3.2.4 k-th order Exp-Golomb (EGk) binarization process

Input to this process is a request for an EGk binarization for a syntax element and signedFlag.

Output of this process is the EGk binarization of the syntax element.

The bin string of the EGk binarization process of a syntax element synVal is specified by a process equivalent to the following pseudo-code:

```
absV = Abs( synVal )
stopLoop = 0
do {
    if( absV >= ( 1 << k ) ) {
        put( 1 )
        absV = absV - ( 1 << k )
        k++
    } else {
        put( 0 )
        while( k-- )
            put( ( absV >> k ) & 1 )
        stopLoop = 1
    }
} while( !stopLoop )
if( signedFlag && synVal != 0 ) {
    if( synVal > 0 )
        put( 0 )
    else
        put( 1 )
}
```

NOTE 1 – The specification for the k-th order Exp-Golomb (EGk) code uses 1's and 0's in reverse meaning for the unary part of the Exp-Golomb code of 0-th order as specified in subclause 9.1.

9.3.2.5 Concatenated unary/ k-th order Exp-Golomb (UEGk) binarization process

Input to this process is a request for a UEGk binarization for a syntax element, signedValFlag and uCoff.

Output of this process is the UEGk binarization of the syntax element.

A UEGk bin string is a concatenation of a prefix bit string and a suffix bit string. The prefix of the binarization is specified by invoking the TU binarization process for the prefix part Min(uCoff, Abs(synElVal)) of a syntax element value synElVal as specified in subclause 9.3.2.2 with cMax = uCoff, where uCoff > 0.

The variable k for a UEGk bin string is dependent on the syntax element for which a UEGk binarization is requested. [Error! Reference source not found. Table 9-34](#) specifies the associated types of binarization for syntax elements, including the value of k for syntax elements that use UEGk binarization.

NOTE 1 – For the syntax elements mvd_l[][][], mvd_l0[][][] and mvd_l1[][][] a UEG3 binarization is used (k is equal to 3).

The UEGk bin string is derived as follows.

HEVC

- If one of the following is true, the bin string of a syntax element having value `synElVal` consists only of a prefix bit string:
 - `signedValFlag` is equal to 0 and the prefix bit string is not equal to the bit string of length `uCoff` with all bits equal to 1,
 - `signedValFlag` is equal to 1 and the prefix bit string is equal to the bit string that consists of a single bit with value equal to 0.
- Otherwise, the bin string of the UEGk suffix part of a syntax element value `synElVal` is specified by invoking the EGk binarization process as specified in subclause 9.3.2.4 with `k` being initialised to the value that is specified in [Table 9-4](#) for the requested UEGk binarization process.

Formatted: Highlight

9.3.2.6 Fixed-length (FL) binarization process

Input to this process is a request for a FL binarization for a syntax element and `cMax`.

Output of this process is the FL binarization of the syntax element.

FL binarization is constructed by using a `fixedLength`-bit unsigned integer bin string of the syntax element value, where $\text{fixedLength} = \text{Ceil}(\text{Log2}(\text{cMax} + 1))$. The indexing of bins for the FL binarization is such that the `binIdx = 0` relates to the least significant bit with increasing values of `binIdx` towards the most significant bit.

9.3.2.7 Binarization process for `cu_qp_delta`

Input to this process is a request for a binarization for the syntax element `mb_qp_delta`.

Output of this process is the binarization of the syntax element.

For syntax elements `mb_qp_delta`, the U binarization process as specified in subclause 9.3.2.4 is invoked with the mapped value of the syntax element `mb_qp_delta` as input and the bin string as output. The assignment rule between the signed value of `mb_qp_delta` and its mapped value is given as specified in [Table 9-3](#).

9.3.2.8 Binarization process for `pred_type`

Input to this process is a request for a binarization for the syntax element `pred_type` and a variable `cLog2CUSize` specifying the current CU size.

Output of this process is the binarization of the syntax element.

The binarization for `pred_type` is given by [Table 9-4](#) depending on slice type and the size of the coding unit.

HEVC

Table 9-469-469-46 – Binarization for pred_type

Slice type	Value of pred_type	PredMode	PartMode	Bin string	
				cLog2CUsSize > 3	cLog2CUsSize = 3e
I	0	MODE_INTRA	PART_2Nx2N	-	1
	1	MODE_INTRA	PART_NxN	-	0
P	0	MODE_INTER	PART_2Nx2N	01	01
	1	MODE_INTER	PART_2NxN	001	001
	2	MODE_INTER	PART_Nx2N	000	0001
	3	MODE_INTER	PART_NxN	-	0000
	4	MODE_INTRA	PART_2Nx2N	1	11
	5	MODE_INTRA	PART_NxN	-	10
B	0	MODE_INTER	PART_2Nx2N	1	1
	1	MODE_INTER	PART_2NxN	01	01
	2	MODE_INTER	PART_Nx2N	001	001
	3	MODE_INTER	PART_NxN	-	0001
	4	MODE_INTRA	PART_2Nx2N	000	0000 1
	5	MODE_INTRA	PART_NxN	-	0000 0

9.3.2.9 Binarization process for rem_intra_luma_pred_mode

Input to this process is a request for the syntax element rem_intra_luma_pred_mode and cNumBins.

Output of this process is the binarization of the syntax element.

The binarization for rem_intra_luma_pred_mode is given by Table 9-47Table 9-35.

Table 9-479-479-47 – Binarization for rem_intra_luma_pred_mode

Value of rem_intra_luma_pred_mode	Bin string
less than 32	FL, cMax = cNumBins
32	111110
33	111111

9.3.2.10 Binarization process for coeff_abs_level_minus3

Input to this process is a request for a binarization for the syntax element coeff_abs_level_minus3[n].

Output of this process is the binarization of the syntax element.

The variables cLastSE and cLastRiceParam are derived as follows.

- If n is equal to 0 or all previous syntax elements coeff_abs_level_minus3[pos] with pos less than n are derived to be equal to 0 instead of being explicitly parsed, cLastSE and cLastRiceParam are set equal to 0.
- Otherwise (n is not equal to 0), cLastSE is set equal to coeff_abs_level_minus3[n – 1] and cLastRiceParam is set equal to the value of cRiceParam that has been derived during the invocation of this subclause for the syntax element coeff_abs_level_minus2[n – 1] of the same transform block.

The variable cRiceParam is derived as follows.

- If cLastSE is equal to 0 or 1 and cLastRiceParam is equal to 0, cRiceParam is set equal to 0.

HEVC

- Otherwise if cLastSE is equal to 2 or 3 and cLastRiceParam is equal to 0 or 1, cRiceParam is set equal to 1.
- Otherwise if one of the following conditions is true, cRiceParam is set equal to 2.
 - cLastSE is in the range of 4 to 12 and cLastRiceParam is equal to 0.
 - cLastSE is in the range of 4 to 10 and cLastRiceParam is equal to 1.
 - cLastSE is in the range of 4 to 9 and cLastRiceParam is equal to 2.
- Otherwise, cRiceParam is set equal to 3.

The variable cTRMax is derived from cRiceParam as given in [Table 9-48](#)[Table 9-36](#).

Table 9-48~~9-48~~ – Specification of cTRMax depending on cRiceParam

cRiceParam	cTRMax
0	7
1	20
2	42
3	70

The binarization of coeff_abs_level_minus3 consists of a prefix part and (when present) a suffix part. The prefix part of the binarization is derived by invoking the TR binarization process as specified in subclause 9.3.2.3 for the syntax element coeff_abs_level_minus3[n] with the variables cRiceParam and cTRMax as the inputs.

When the prefix bit string is not equal to the bin string that consists of (cTRMax + 1 >> cRiceParam) + cRiceParam ones, the bin string consists of a prefix bin string and a suffix bin string. The suffix bin string is derived using the EG0 binarization as specified in subclause 9.3.2.4.

9.3.3 Decoding process flow

Input to this process is a binarization of the requested syntax element, maxBinIdxCtx, bypassFlag, ctxIdxTable and ctxIdxOffset as specified in subclause 9.3.2.

Output of this process is the value of the syntax element.

This process specifies how each bit of a bit string is parsed for each syntax element.

After parsing each bit, the resulting bit string is compared to all bin strings of the binarization of the syntax element and the following applies.

- If the bit string is equal to one of the bin strings, the corresponding value of the syntax element is the output.
- Otherwise (the bit string is not equal to one of the bin strings), the next bit is parsed.

While parsing each bin, the variable binIdx is incremented by 1 starting with binIdx being set equal to 0 for the first bin.

When the binarization of the corresponding syntax element consists of a prefix and a suffix binarization part, the variable binIdx is set equal to 0 for the first bin of each part of the bin string (prefix part or suffix part). In this case, after parsing the prefix bit string, the parsing process of the suffix bit string related to the binarizations specified in subclauses 9.3.2.5 and 9.3.2.10 is invoked depending on the resulting prefix bit string as specified in subclauses 9.3.2.5 and 9.3.2.10.

Depending on the variable bypassFlag, the following applies.

- If bypassFlag is equal to 1, the bypass decoding process as specified in subclause 9.3.3.2.3 is applied for parsing the value of the bins from the bitstream.
- Otherwise (bypassFlag is equal to 0), the parsing of each bin is specified by the following two ordered steps:
 1. Given binIdx, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset, ctxIdx is derived as specified in subclause 9.3.3.1.
 2. Given ctxIdxTable and ctxIdx, the value of the bin from the bitstream as specified in subclause 9.3.3.2 is decoded.

9.3.3.1 Derivation process for ctxIdx

Inputs to this process are binIdx, maxBinIdxCtx, ctxIdxTable, and ctxIdxOffset.

Output of this process is ctxIdx.

Table 9-49 ~~Table 9-37~~ shows the assignment of ctxIdx increments (ctxIdxInc) to binIdx for all ctxIdxTable and ctxIdxOffset.

The ctxIdx to be used with a specific binIdx is specified by first determining the ctxIdxTable and ctxIdxOffset associated with the given bin string or part thereof. The ctxIdxOffset is listed in **Table 9-49** ~~Table 9-37~~, the ctxIdx for a binIdx is the sum of ctxIdxOffset and ctxIdxInc, which is found in **Table 9-49** ~~Table 9-37~~. When more than one value is listed in **Table 9-49** ~~Table 9-37~~ for a binIdx, the assignment process for ctxIdxInc for that binIdx is further specified in the subclauses given in parenthesis of the corresponding table entry.

All bins with binIdx greater than maxBinIdxCtx are parsed using the value of ctxIdx being assigned to binIdx equal to maxBinIdxCtx.

All entries in **Table 9-49** ~~Table 9-37~~ labelled with "na" correspond to values of binIdx that do not occur for the corresponding ctxIdxOffset.

Table 9-499-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values

Syntax element	ctxIdxTable, ctxIdxOffset	binIdx				
		0	1	2	3	>=4
alf_cu_flag	Table 9-18 Table 9-5	0	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		3	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		6	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
split_coding_unit_flag	Table 9-19 Table 9-6	0	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		3	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		6	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
skip_flag	Table 9-20 Table 9-7	0	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		3	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
cu_qp_delta	Table 9-21 Table 9-8	0	0	2	3	3
		4	0	2	3	3
		8	0	2	3	3
pred_type	Table 9-22 Table 9-9	0	0	na	na	na
		1	0	1	2	3
		5	0	1	2	3
prev_intra_luma_pred_flag	Table 9-23 Table 9-10	0	0	na	na	na
		1	0	na	na	na
		2	0	na	na	na
rem_intra_luma_pred_mode	Table 9-24 Table 9-11	0	0	0	0	0
		1	0	0	0	0
		2	0	0	0	0
intra_chroma_pred_mode	Table 9-25 Table 9-12	0	0,1,2 (subclause 9.3.3.1.1.1)	3	3	3
		4	0,1,2 (subclause 9.3.3.1.1.1)	3	3	3
		8	0,1,2 (subclause 9.3.3.1.1.1)	3	3	3
merge_flag	Table 9-26 Table 9-13	0	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
		3	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na
merge_idx	Table 9-27 Table 9-14	0	0,1,2,3 (subclause 9.3.3.1.1.2)	0,1,2,3 (subclause 9.3.3.1.1.2)	0,2,3 (subclause 9.3.3.1.1.2)	3
		4	0,1,2,3 (subclause 9.3.3.1.1.2)	0,1,2,3 (subclause 9.3.3.1.1.2)	0,2,3 (subclause 9.3.3.1.1.2)	3
inter_pred_flag	Table 9-28 Table 9-15	0	0,1,2 (subclause 9.3.3.1.1.1)	na	na	na

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-499-49-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values

Syntax element	ctxIdxTable, ctxIdxOffset	binIdx				
		0	1	2	3	>=4
ref_idx_l0	Table 9-29 Table 9-16	0 (subclause 9.3.3.1.1.1)	4	4	4	4
ref_idx_l0, ref_idx_l1, ref_idx_lc	Table 9-29 Table 9-16	6 (subclause 9.3.3.1.1.1)	4	4	4	4
mvd_l0[][][0]	Table 9-30 Table 9-17	0 (subclause 9.3.3.1.1.1)	3	4	5	6
mvd_l0[][][1]	Table 9-30 Table 9-17	7 (subclause 9.3.3.1.1.1)	3	4	5	6
mvd_l0[][][0], mvd_lc[][][0], mvd_l1[][][0]	Table 9-30 Table 9-17	15 (subclause 9.3.3.1.1.1)	3	4	5	6
mvd_l0[][][1], mvd_lc[][][1], mvd_l1[][][1]	Table 9-30 Table 9-17	21 (subclause 9.3.3.1.1.1)	3	4	5	6
mvp_idx_l0	Table 9-31 Table 9-18	0	1	1	1	1
mvp_idx_l0, mvp_idx_l1, mvp_idx_lc	Table 9-31 Table 9-18	2	1	1	1	1
no_residual_data_flag	Table 9-32 Table 9-19	0 (subclause 9.3.3.1.1.1)	na	na	na	na
		4 (subclause 9.3.3.1.1.1)	na	na	na	na
split_transform_flag	Table 9-33 Table 9-20	0 cuDepth + trafoDepth	na	na	na	na
		4 cuDepth + trafoDepth	na	na	na	na
		8 cuDepth + trafoDepth	na	na	na	na
cbf_luma	Table 9-34 Table 9-21	0 (subclause 9.3.3.1.1.1)	na	na	na	na
		4 (subclause 9.3.3.1.1.1)	na	na	na	na
		8 (subclause 9.3.3.1.1.1)	na	na	na	na
cbf_cb (PredMode == MODE_INTRA)	Table 9-35 Table 9-22	0 (subclause 9.3.3.1.1.1)	na	na	na	na
		4 (subclause 9.3.3.1.1.1)	na	na	na	na
		8 (subclause 9.3.3.1.1.1)	na	na	na	na
cbf_cb (PredMode != MODE_INTRA)	Table 9-35 Table 9-22	0 trafoDepth	na	na	na	na
		4 trafoDepth	na	na	na	na
		8 trafoDepth	na	na	na	na
cbf_cr (PredMode == MODE_INTRA)	Table 9-36 Table 9-23	0 (subclause 9.3.3.1.1.1)	na	na	na	na
		4 (subclause 9.3.3.1.1.1)	na	na	na	na
		8 (subclause 9.3.3.1.1.1)	na	na	na	na

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values

Syntax element	ctxIdxTable, ctxIdxOffset	binIdx				
		0	1	2	3	>=4
cbf_cr (PredMode != MODE_INTRA)	0	trafoDepth	na	na	na	na
	4	trafoDepth	na	na	na	na
	8	trafoDepth	na	na	na	na

Formatted: Font: 8 pt

Table 9-499-499-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values

Syntax element	ctxIdxTable, ctxIdxOffset	binIdx				
		0	1	2	3	>=4
last_significant_coeff_x	Table 9-37Table 9-24	0	0..40 (subclause 9.3.3.1.1.3)			
		41	0..40 (subclause 9.3.3.1.1.3)			
		82	0..40 (subclause 9.3.3.1.1.3)			
last_significant_coeff_y	Table 9-38Table 9-25	0	0..40 (subclause 9.3.3.1.1.3)			
		41	0..40 (subclause 9.3.3.1.1.3)			
		82	0..40 (subclause 9.3.3.1.1.3)			
significant_coeff_flag	Table 9-39Table 9-26	0	0..111 (subclause 9.3.3.1.1.4)	na	na	na
		0	0..111 (subclause 9.3.3.1.1.4)	na	na	na
		6	7			
		0	0			
		64	64			
		22	23			
		0	0			
		64	64			
		38	39			
		-32	-19			
		125	72			
		54	55			
		0	0			
		64	64			
		70	71			
		-8	1			
		80	36			
		86	87			
		-11	-29			
		81	92			
		102	103			
		-18	-10			
		99	59			
		Table 9-40Table 9-27				
		Table 9-41Table 9-28	0	0..111 (subclause 9.3.3.1.1.4)	na	na
coeff_abs_level_greater1_flag	Table 9-42Table 9-29	0	0..59 (subclause 9.3.3.1.1.5)	na	na	na
		60	0..59 (subclause 9.3.3.1.1.5)	na	na	na

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: Times New Roman, 8 pt, English (United Kingdom)

Formatted: Font: 8 pt

Formatted: Font: 8 pt

HEVC

Table 9-499-49-49 – Assignment of ctxIdxInc to binIdx for all ctxIdxTable and ctxIdxOffset values

Syntax element	ctxIdxTable, ctxIdxOffset	binIdx				
		0	1	2	3	>=4
coeff_abs_level_greater2_flag	120 (subclause 9.3.3.1.1.5)	0..59	na	na	na	na
	0 (subclause 9.3.3.1.1.6)	0..59	na	na	na	na
	60 (subclause 9.3.3.1.1.6)	0..59	na	na	na	na
	120 (subclause 9.3.3.1.1.6)	0..59	na	na	na	na

Formatted: Font: 8 pt

9.3.3.1.1 Assignment process of ctxIdxInc using neighbouring syntax elements

Subclause 9.3.3.1.1.1 specifies the derivation process of ctxIdxInc for the syntax elements alf_cu_flag, split_coding_unit_flag, skip_flag, merge_flag, intra_chroma_pred_mode, inter_pred_flag, ref_idx_lc, ref_idx_l0, ref_idx_l1, mvd_l0, mvd_l1, mvd_lc, no_residual_data_flag, cbf_luma, cbf_cb and cbf_cr.

Formatted: Heading 5, Indent: Left: 0", Tab stops: Not at 0.59" + 0.79" + 0.98"

9.3.3.1.1.1 Derivation process of ctxIdxInc using left and above syntax elements

Input to this process is the luma location (xP, yP) specifying the top-left luma sample of the current prediction unit relative to the top-left sample of the current picture.

Output of this process is ctxIdxInc.

Let the luma location (xL, yL) specify a location covered by the prediction unit to the left of the top-left luma sample of the current prediction unit with $xL = xP - \text{MinPuSize}$ and $yL = yP$, the variable availableL is derived as follows. [Ed.: (BB) MinPuSize should be defined somewhere]

- If the prediction unit covering location (xL, yL) is available, availableL is set equal to 1.
- Otherwise (the prediction unit covering location (xL, yL) is not available), availableL is set equal to 0.

Let the luma location (xA, yA) specify a location covered by the prediction unit above the top-left luma sample of the current prediction unit with $xA = xP$ and $yA = yP - \text{MinPuSize}$, the variable availableA is derived as follows. [Ed.: (BB) MinPuSize should be defined somewhere]

- If the prediction unit covering location (xA, yA) is available, availableA is set equal to 1.
- Otherwise (the prediction unit covering location (xA, yA) is not available), availableA is set equal to 0

The assignment of ctxIdxInc for the syntax elements alf_cu_flag, split_coding_unit_flag, skip_flag, merge_flag, intra_chroma_pred_mode, inter_pred_flag, ref_idx_lc, ref_idx_l0, ref_idx_l1, mvd_lc, mvd_l0, mvd_l1, no_residual_data_flag, cbf_luma, cbf_cb and cbf_cr is specified in [Table 9-50 – Specification of ctxIdxInc using left and above syntax elements](#)Table 9-38.

HEVC

Table 9-509-509-50 – Specification of ctxIdxInc using left and above syntax elements

Syntax element	condL	condA	ctxIdxInc
alf_cu_flag	alf_cu_flag[xL][yL]	alf_cu_flag[xA][yA]	(condL && availableL) + (condA && availableA)
split_coding_unit_flag	cuDepth[xL][yL] > cuDepth[xP][yP]	cuDepth[xA][yA] > cuDepth[xP][yP]	(condL && availableL) + (condA && availableA)
skip_flag	skip_flag[xL][yL]	skip_flag[xA][yA]	(condL && availableL) + (condA && availableA)
merge_flag	merge_flag[xL][yL]	merge_flag[xA][yA]	(condL && availableL) + (condA && availableA)
intra_chroma_pred_mode	IntraPredMode[xL][yL] == 4	IntraPredMode [xA][yA] == 4	(condL && availableL) + (condA && availableA)
inter_pred_flag	inter_pred_flag[xL][yL]	inter_pred_flag[xA][yA]	(condL && availableL) + (condA && availableA)
ref_idx_lc	ref_idx_lc[xL][yL] > 0	ref_idx_lc[xA][yA] > 0	(condL && availableL) + (condA && availableA) << 1
ref_idx_l0	ref_idx_l0[xL][yL] > 0	ref_idx_l0[xA][yA] > 0	(condL && availableL) + (condA && availableA) << 1
ref_idx_l1	ref_idx_l1[xL][yL] > 0	ref_idx_l1[xA][yA] > 0	(condL && availableL) + (condA && availableA) << 1
mvd_lc	mvd_lc[xL][yL] > 16	mvd_lc[xA][yA] > 16	(condL && availableL) + (condA && availableA)
mvd_l0	mvd_l0[xL][yL] > 16	mvd_l0[xA][yA] > 16	(condL && availableL) + (condA && availableA)
mvd_l1	mvd_l1[xL][yL] > 16	mvd_l1[xA][yA] > 16	(condL && availableL) + (condA && availableA)
no_residual_data_flag	no_residual_data_flag[xL][yL]	no_residual_data_flag[xA][yA]	(condL && availableL) + (condA && availableA) << 1
cbf_luma	cbf_luma[xL][yL]	cbf_luma[xA][yA]	(condL && availableL) + (condA && availableA) << 1
cbf_cb	cbf_cb[xL][yL]	cbf_cb[xA][yA]	(condL && availableL) + (condA && availableA) << 1
cbf_cr	cbf_cr[xL][yL]	cbf_cr[xA][yA]	(condL && availableL) + (condA && availableA) << 1

9.3.3.1.1.2 Derivation process of ctxIdxInc for the syntax element merge_index

Input to this process is binIdx.

Output of this process is ctxIdxInc.

The variable ctxIdxInc is derived as follows.

- If binIdx is equal to 0, the following applies.
 - If availableLeft is equal to 1 and availableAbove is equal to 1, ctxIdxInc is set equal to 0.
 - Otherwise if availableLeft is equal to 1 or availableAbove is equal to 1, ctxIdxInc is set equal to 2.
 - Otherwise (availableLeft is equal to 0 and availableAbove is equal to 0), ctxIdxInc is set equal to 3.
- Otherwise if binIdx is equal to 1 and NumMergeCand is greater than 2, the following applies.
 - If availableAbove is equal to 1, ctxIdxInc is set equal to 2.
 - Otherwise (availableAbove is equal to 0), ctxIdxInc is set equal to 3.
- Otherwise if binIdx is equal to 2 and NumMergeCand is greater than 3, ctxIdxInc is set equal to 3.

HEVC

- Otherwise, ctxIdxInc is set equal to 0.

When ctxIdxInc is not equal to 0, ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = \text{ctxIdxInc} - \text{availableCollocated} \quad (9-51516)$$

[Ed. (BB): The flags `availableLeft`, `availableAbove`, `availableCollocated` need to be defined or a simpler context derivation should be used.]

9.3.3.1.1.3 Derivation process of ctxIdxInc for the syntax elements `last_significant_coeff_x` and `last_significant_coeff_y`

Inputs to this process are the binIdx , the color component index cIdx and the transform block size $\log_2\text{TrafoSize}$.

Output of this process is ctxIdxInc .

Table 9-519-519-51 – Specification of lastCtx depending on binIdx

binIdx	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
lastCtx	0	1	2	3	3	4	4	5	5	5	5	6	6	6	6	7
binIdx	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
lastCtx	7	7	7	8	8	8	8	9	9	9	9	10	10	10	10	

The variable lastCtx is derived from binIdx as given by [Table 9-51Table 9-39](#). For the derivation of ctxIdxInc , the following applies.

- If $\log_2\text{TrafoSize}$ is less than or equal to 2, ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = \text{lastCtx} \quad (9-52527)$$

- Otherwise if $\log_2\text{TrafoSize}$ is equal to 3, ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = \text{lastCtx} + 3 \quad (9-53538)$$

- Otherwise if $\log_2\text{TrafoSize}$ is equal to 4, ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = \text{lastCtx} + 8 \quad (9-54549)$$

- Otherwise ($\log_2\text{TrafoSize}$ is greater than 4), ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = \text{lastCtx} + 15 \quad (9-555510)$$

When cIdx is greater than 0, ctxIdxInc is modified as follows.

$$\text{ctxIdxInc} = \text{ctxIdxInc} + 26 \quad (9-565611)$$

[Ed. (BB): The context derivation assumes maximum transform sizes less than or equal to 32x32 for luma and 16x16 for chroma and minimum transform sizes greater than or equal to 4x4.]

9.3.3.1.1.4 Derivation process of ctxIdxInc for the syntax element `significant_coeff_flag`

Inputs to this process are the color component index cIdx , the current coefficient scan position (xC , yC) and the transform block size $\log_2\text{TrafoSize}$.

Output of this process is ctxIdxInc .

The variable sigCtx depends on the current position (xC , yC), the transform block size and previously decoded bins of the syntax element `significant_coeff_flag`. For the derivation of sigCtx , the following applies.

- If $\log_2\text{TrafoSize}$ is less than or equal to 3, sigCtx is derived as follows.

$$\begin{aligned} \text{shift} &= \log_2\text{TrafoSize} == 3 ? 1 : 0 \\ \text{sigCtx} &= ((\text{yC} \gg \text{shift}) \ll 2) + (\text{xC} \gg \text{shift}) \end{aligned} \quad (9-575712)$$

- Otherwise if xC is less than 2 and yC is less than 2, sigCtx is derived as follows.

$$\text{sigCtx} = (\text{yC} \ll 1) + \text{xC} \quad (9-585813)$$

HEVC

- Otherwise if yC is equal to 0, sigCtx is derived as follows.

$$\text{sigCtx} = 4 + \text{significant_coeff_flag}[x\text{C}-1][y\text{C}] + \text{significant_coeff_flag}[x\text{C}-2][y\text{C}] \quad (9-595914)$$

- Otherwise if xC is equal to 0, sigCtx is derived as follows.

$$\text{sigCtx} = 4 + \text{significant_coeff_flag}[x\text{C}][y\text{C}-1] + \text{significant_coeff_flag}[x\text{C}][y\text{C}-2] \quad (9-606015)$$

- Otherwise (xC is greater than 1 and yC is greater than 1), the following applies.

- The variable sigCtx is initialized using previously decoded bins of the syntax element significant_coeff_flag as follows.

$$\text{sigCtx} = \text{significant_coeff_flag}[x\text{C}-1][y\text{C}] + \text{significant_coeff_flag}[x\text{C}][y\text{C}-1] + \text{significant_coeff_flag}[x\text{C}-1][y\text{C}-1] \quad (9-616116)$$

- When xC is greater than 1, the following applies.

$$\text{sigCtx} = \text{sigCtx} + \text{significant_coeff_flag}[x\text{C}-2][y\text{C}] \quad (9-626217)$$

- When yC is greater than 1, the following applies.

$$\text{sigCtx} = \text{sigCtx} + \text{significant_coeff_flag}[x\text{C}][y\text{C}-2] \quad (9-636318)$$

- The variable sigCtx is derived as follows.

$$\text{sigCtx} = 10 + \min(4, \text{sigCtx}) \quad (9-646419)$$

The context index increment ctxIdxInc is derived using the color component index cIdx, the transform block size log2TrafoSize and sigCtx as follows.

- If cIdx is equal to 0, ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = ((5 - \log2\text{TrafoSize}) * 16) + \text{sigCtx} \quad (9-656520)$$

- Otherwise (cIdx is greater than 0), ctxIdxInc is derived as follows.

$$\text{ctxIdxInc} = 64 + ((4 - \log2\text{TrafoSize}) * 16) + \text{sigCtx} \quad (9-666621)$$

[Ed. (BB): The context derivation assumes maximum transform sizes less than or equal to 32x32 for luma and 16x16 for chroma and minimum transform sizes greater than or equal to 4x4.]

9.3.3.1.1.5 Derivation process of ctxIdxInc for the syntax element coeff_abs_level_greater1_flag

Inputs to this process are the color component index cIdx, the transform block size log2TrafoSize, the 4x4 subset index i and the current coefficient scan index n within the current subset.

Output of this process is ctxIdxInc.

The variable ctxSet specifies the current context set and for its derivation the following applies.

- If n is equal to 0 or all previous syntax elements coeff_abs_level_greater1_flag[pos] with pos less than n are derived to be equal to 0 instead of being explicitly parsed, the following applies.

- If the current transform block size log2TrafoSize is equal to 2, ctxSet is derived as follows.

$$\text{ctxSet} = 0 \quad (9-676722)$$

- Otherwise if the current 4x4 subset is the first one in scanning order (i is equal to 0), ctxSet is derived as follows.

$$\text{ctxSet} = 5 \quad (9-686823)$$

- Otherwise (i is not equal to 0), the variable lastGreater2Ctx is set equal to the variable greater2Ctx that has been derived during the last invocation of subclause 9.3.3.1.1.6 for the syntax element coeff_abs_level_greater2_flag for the subset i – 1 and ctxSet is derived as follows.

$$\text{ctxSet} = ((\text{lastGreater2Ctx} + 1) \gg 2) + 1 \quad (9-696924)$$

HEVC

- The variable `greater1Ctx` is set equal to 1.
- Otherwise (`coeff_abs_level_greater1_flag[n]` is not the first to be parsed within the current subset `i`), for the derivation of `ctxSet` and `greater1Ctx` the following applies.
 - The variable `ctxSet` is set equal to the variable `ctxSet` that has been derived during the last invocation of this subclause.
 - The variable `greater1Ctx` is set equal to the variable `greater1Ctx` that has been derived during the last invocation of this subclause.
 - When `greater1Ctx` is equal to 1, the variable `lastGreater1Flag` is set equal to the syntax element `coeff_abs_level_greater1_flag` that has been used during the last invocation of this subclause as follows.
 - If `lastGreater1Flag` is equal to 1, `greater1Ctx` is set equal to 0.
 - Otherwise (`lastGreater1Flag` is equal to 0), `greater1Ctx` is incremented by 1.

The context index increment `ctxIdxInc` is derived using the current context set `ctxSet` and the current context `greater1Ctx` as follows.

$$\text{ctxIdxInc} = (\text{ctxSet} * 5) + \min(4, \text{greater1Ctx}) \quad (9-707025)$$

When `cldx` is greater than 0, `ctxIdxInc` is modified as follows.

$$\text{ctxIdxInc} = \text{ctxIdxInc} + 30 \quad (9-717126)$$

9.3.3.1.1.6 Derivation process of `ctxIdxInc` for the syntax element `coeff_abs_level_greater2_flag`

Inputs to this process are the color component index `cldx`, the transform block size `log2TrafoSize`, the 4x4 subset index `i` and the current coefficient scan index `n` within the current subset.

Output of this process is `ctxIdxInc`.

The variable `ctxSet` specifies the current context set and for its derivation the following applies.

- If `n` is equal to 0 or all previous syntax elements `coeff_abs_level_greater1_flag[pos]` with `pos` less than `n` are derived to be equal to 0 instead of being explicitly parsed, the following applies.
 - If the current transform block size `log2TrafoSize` is equal to 2, `ctxSet` is derived as follows.

$$\text{ctxSet} = 0 \quad (9-727227)$$

- Otherwise if the current 4x4 subset is the first one in scanning order (`i` is equal to 0), `ctxSet` is derived as follows.

$$\text{ctxSet} = 5 \quad (9-737328)$$

- Otherwise (`i` is not equal to 0), the variable `lastGreater2Ctx` is set equal to the variable `greater2Ctx` that has been derived during the last invocation of this subclause for the subset `i – 1` and `ctxSet` is derived as follows.

$$\text{ctxSet} = (\text{lastGreater2Ctx} \gg 2) + 1 \quad (9-747429)$$

- The variable `greater2Ctx` is set equal to 1.
- Otherwise (`coeff_abs_level_greater1_flag[n]` is not the first to be parsed within the current subset `i`), for the derivation of `ctxSet` and `greater2Ctx` the following applies.
 - The variable `ctxSet` is set equal to the variable `ctxSet` that has been derived during the last invocation of this subclause.
 - The variable `greater2Ctx` is set equal to the variable `greater2Ctx` that has been derived during the last invocation of this subclause incremented by 1.

The context index increment `ctxIdxInc` is derived using the current context set `ctxSet` and the current context `greater2Ctx` as follows.

$$\text{ctxIdxInc} = (\text{ctxSet} * 5) + \min(4, \text{greater2Ctx}) \quad (9-757530)$$

When `cldx` is greater than 0, `ctxIdxInc` is modified as follows.

HEVC

ctxIdxInc = ctxIdxInc + 30 (9-767634)

9.3.3.2 Arithmetic decoding process

Inputs to this process are the bypassFlag, ctxIdxTable, and ctxIdx as derived in subclause 9.3.3.1, and the state variables codIRange and codIOffset of the arithmetic decoding engine.

Output of this process is the value of the bin.

Figure 9-1 illustrates the whole arithmetic decoding process for a single bin. For decoding the value of a bin, the context index table ctxIdxTable and the ctxIdx is passed to the arithmetic decoding process DecodeBin(ctxIdxTable, ctxIdx), which is specified as follows.

- If bypassFlag is equal to 1, DecodeBypass() as specified in subclause 9.3.3.2.3 is invoked.
- Otherwise, if bypassFlag is equal to 0, ctxIdxTable is equal 0 and ctxIdx is equal to 0, DecodeTerminate() as specified in subclause 9.3.3.2.4 is invoked.
- Otherwise (bypassFlag is equal to 0, ctxIdxTable is not equal to 0 and ctxIdx is not equal to 0), DecodeDecision() as specified in subclause 9.3.3.2.1 is applied.

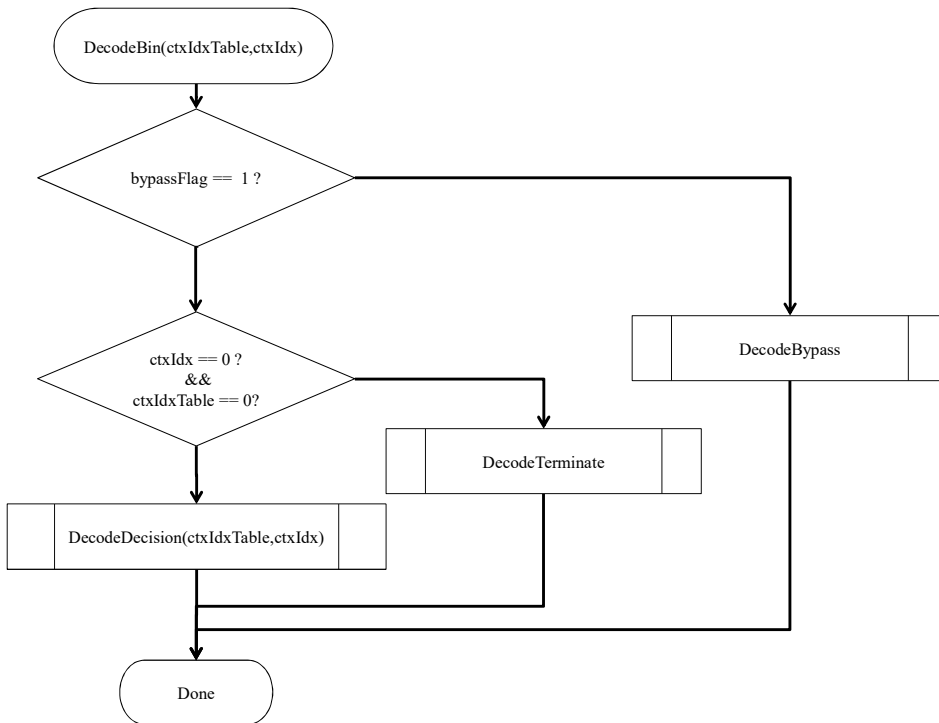


Figure 9-1 – Overview of the arithmetic decoding process for a single bin (informative)

NOTE – Arithmetic coding is based on the principle of recursive interval subdivision. Given a probability estimation $p(0)$ and $p(1) = 1 - p(0)$ of a binary decision (0, 1), an initially given code sub-interval with the range codIRange will be subdivided into two sub-intervals having range $p(0) * \text{codIRange}$ and $\text{codIRange} - p(0) * \text{codIRange}$, respectively. Depending on the decision, which has been observed, the corresponding sub-interval will be chosen as the new code interval, and a binary code string pointing into that interval will represent the sequence of observed binary decisions. It is useful to distinguish between the most probable symbol (MPS) and the least probable symbol (LPS), so that binary decisions have to be identified as either MPS or LPS, rather than 0 or 1. Given this terminology, each context is specified by the probability p_{LPS} of the LPS and the value of MPS (valMPS), which is either 0 or 1.

The arithmetic core engine in this Recommendation | International Standard has three distinct properties:

HEVC

- The probability estimation is performed by means of a finite-state machine with a table-based transition process between 64 different representative probability states $\{p_{LPS}(pStateIdx) | 0 \leq pStateIdx < 64\}$ for the LPS probability p_{LPS} . The numbering of the states is arranged in such a way that the probability state with index $pStateIdx = 0$ corresponds to an LPS probability value of 0.5, with decreasing LPS probability towards higher state indices.
- The range $codIRange$ representing the state of the coding engine is quantised to a small set $\{Q_1, \dots, Q_4\}$ of pre-set quantisation values prior to the calculation of the new interval range. Storing a table containing all 64×4 pre-computed product values of $Q_i * p_{LPS}(pStateIdx)$ allows a multiplication-free approximation of the product $codIRange * p_{LPS}(pStateIdx)$.
- For syntax elements or parts thereof for which an approximately uniform probability distribution is assumed to be given a separate simplified encoding and decoding bypass process is used.

9.3.3.2.1 Arithmetic decoding process for a binary decision

Inputs to this process are $ctxIdxTable$, $ctxIdx$, $codIRange$, and $codIOffset$.

Outputs of this process are the decoded value $binVal$, and the updated variables $codIRange$ and $codIOffset$.

Figure 9-2 Figure 9-2 shows the flowchart for decoding a single decision (DecodeDecision):

1. The value of the variable $codIRangeLPS$ is derived as follows.
 - Given the current value of $codIRange$, the variable $qCodIRangeIdx$ is derived by

$$qCodIRangeIdx = (codIRange \gg 6) \& 3 \quad (9-777729)$$
 - Given $qCodIRangeIdx$ and $pStateIdx$ associated with $ctxIdxTable$ and $ctxIdx$, the value of the variable $rangeTabLPS$ as specified in **Table 9-52** **Table 9-40** is assigned to $codIRangeLPS$:

$$codIRangeLPS = rangeTabLPS[pStateIdx][qCodIRangeIdx] \quad (9-787830)$$
2. The variable $codIRange$ is set equal to $codIRange - codIRangeLPS$ and the following applies.
 - If $codIOffset$ is greater than or equal to $codIRange$, the variable $binVal$ is set equal to $1 - valMPS$, $codIOffset$ is decremented by $codIRange$, and $codIRange$ is set equal to $codIRangeLPS$.
 - Otherwise, the variable $binVal$ is set equal to $valMPS$.

Given the value of $binVal$, the state transition is performed as specified in subclause 9.3.3.2.1.1. Depending on the current value of $codIRange$, renormalization is performed as specified in subclause 9.3.3.2.2.

9.3.3.2.1.1 State transition process

Inputs to this process are the current $pStateIdx$, the decoded value $binVal$ and $valMPS$ values of the context variable associated with $ctxIdxTable$ and $ctxIdx$.

Outputs of this process are the updated $pStateIdx$ and $valMPS$ of the context variable associated with $ctxIdx$.

Depending on the decoded value $binVal$, the update of the two variables $pStateIdx$ and $valMPS$ associated with $ctxIdx$ is derived as specified by the following pseudo-code:

```

if( binVal == valMPS )
    pStateIdx = transIdxMPS( pStateIdx )
else {
    if( pStateIdx == 0 )
        valMPS = 1 - valMPS
    pStateIdx = transIdxLPS( pStateIdx )
}
  
```

(9-797931)

Table 9-53 **Table 9-41** specifies the transition rules $transIdxMPS()$ and $transIdxLPS()$ after decoding the value of $valMPS$ and $1 - valMPS$, respectively.

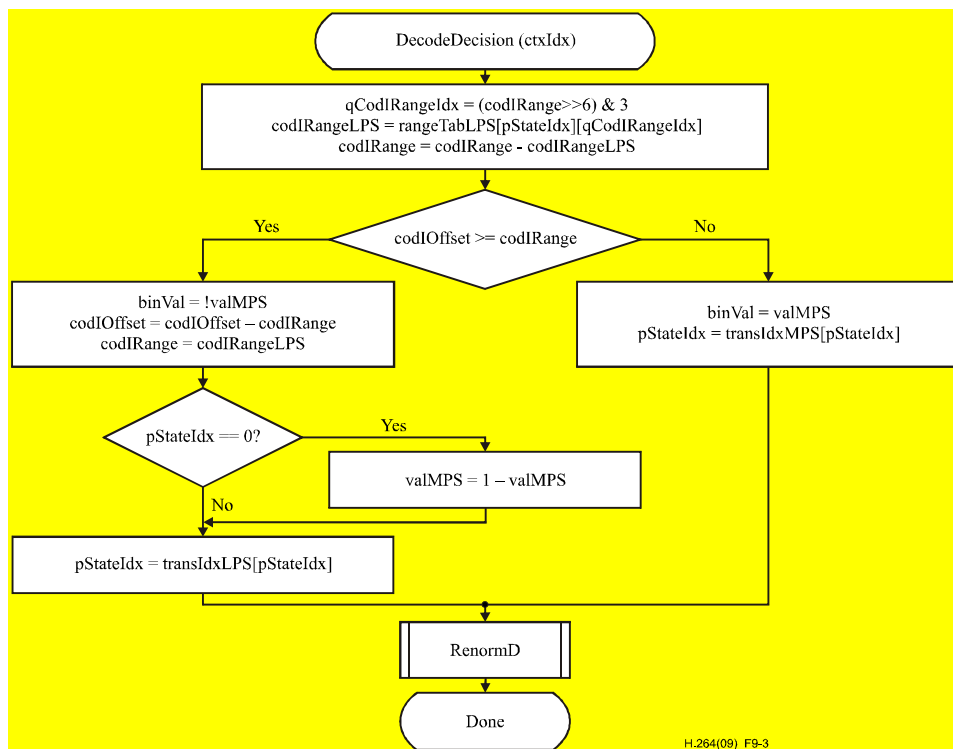


Figure 9-2 – Flowchart for decoding a decision

Table 9-529-529-52 – Specification of rangeTabLPS depending on pStateIdx and qCodIRangeIdx

pStateIdx	qCodIRangeIdx				pStateIdx	qCodIRangeIdx			
	0	1	2	3		0	1	2	3
0	128	176	208	240	32	27	33	39	45
1	128	167	197	227	33	26	31	37	43
2	128	158	187	216	34	24	30	35	41
3	123	150	178	205	35	23	28	33	39
4	116	142	169	195	36	22	27	32	37
5	111	135	160	185	37	21	26	30	35
6	105	128	152	175	38	20	24	29	33
7	100	122	144	166	39	19	23	27	31
8	95	116	137	158	40	18	22	26	30
9	90	110	130	150	41	17	21	25	28
10	85	104	123	142	42	16	20	23	27
11	81	99	117	135	43	15	19	22	25
12	77	94	111	128	44	14	18	21	24

HEVC

13	73	89	105	122	45	14	17	20	23
14	69	85	100	116	46	13	16	19	22
15	66	80	95	110	47	12	15	18	21
16	62	76	90	104	48	12	14	17	20
17	59	72	86	99	49	11	14	16	19
18	56	69	81	94	50	11	13	15	18
19	53	65	77	89	51	10	12	15	17
20	51	62	73	85	52	10	12	14	16
21	48	59	69	80	53	9	11	13	15
22	46	56	66	76	54	9	11	12	14
23	43	53	63	72	55	8	10	12	14
24	41	50	59	69	56	8	9	11	13
25	39	48	56	65	57	7	9	11	12
26	37	45	54	62	58	7	9	10	12
27	35	43	51	59	59	7	8	10	11
28	33	41	48	56	60	6	8	9	11
29	32	39	46	53	61	6	7	9	10
30	30	37	43	50	62	6	7	8	9
31	29	35	41	48	63	2	2	2	2

Table 9-539-539-53 – State transition table

pStatIdx	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
transIdxLPS	0	0	1	2	2	4	4	5	6	7	8	9	9	11	11	12
transIdxMPS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
pStatIdx	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
transIdxLPS	13	13	15	15	16	16	18	18	19	19	21	21	22	22	23	24
transIdxMPS	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
pStatIdx	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
transIdxLPS	24	25	26	26	27	27	28	29	29	30	30	30	31	32	32	33
transIdxMPS	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
pStatIdx	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
transIdxLPS	33	33	34	34	35	35	35	36	36	36	37	37	37	38	38	63
transIdxMPS	49	50	51	52	53	54	55	56	57	58	59	60	61	62	62	63

9.3.3.2.2 Renormalization process in the arithmetic decoding engine

Inputs to this process are bits from slice data and the variables codIRange and codIOffset.

HEVC

Outputs of this process are the updated variables `codIRange` and `codIOffset`.

A flowchart of the renormalization is shown in [Figure 9-3](#)[Figure 9-3](#). The current value of `codIRange` is first compared to 256 and further steps are specified as follows.

- If `codIRange` is greater than or equal to 256, no renormalization is needed and the RenormD process is finished;
- Otherwise (`codIRange` is less than 256), the renormalization loop is entered. Within this loop, the value of `codIRange` is doubled, i.e., left-shifted by 1 and a single bit is shifted into `codIOffset` by using `read_bits( 1 )`.

The bitstream shall not contain data that result in a value of `codIOffset` being greater than or equal to `codIRange` upon completion of this process.

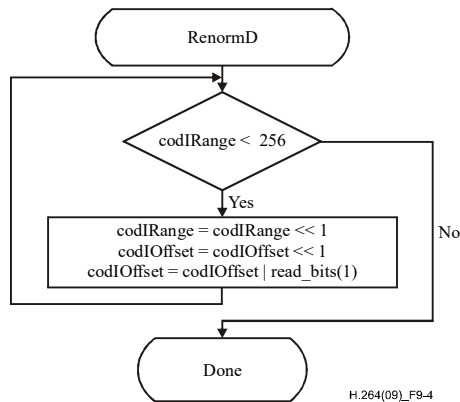


Figure 9-3 – Flowchart of renormalization

9.3.3.2.3 Bypass decoding process for binary decisions

Inputs to this process are bits from slice data and the variables `codIRange` and `codIOffset`.

Outputs of this process are the updated variable `codIOffset` and the decoded value `binVal`.

The bypass decoding process is invoked when `bypassFlag` is equal to 1. [Figure 9-4](#)[Figure 9-4](#) shows a flowchart of the corresponding process.

First, the value of `codIOffset` is doubled, i.e., left-shifted by 1 and a single bit is shifted into `codIOffset` by using `read_bits( 1 )`. Then, the value of `codIOffset` is compared to the value of `codIRange` and further steps are specified as follows.

- If `codIOffset` is greater than or equal to `codIRange`, the variable `binVal` is set equal to 1 and `codIOffset` is decremented by `codIRange`.
- Otherwise (`codIOffset` is less than `codIRange`), the variable `binVal` is set equal to 0.

The bitstream shall not contain data that result in a value of `codIOffset` being greater than or equal to `codIRange` upon completion of this process.

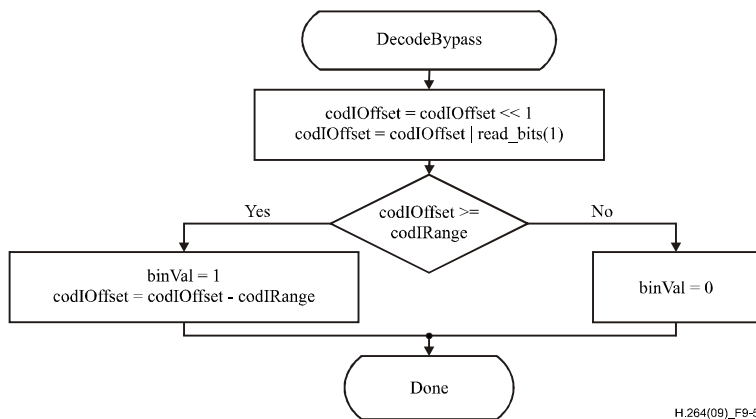


Figure 9-4 – Flowchart of bypass decoding process

9.3.3.2.4 Decoding process for binary decisions before termination

Inputs to this process are bits from slice data and the variables `codIRange` and `codIOffset`.


Outputs of this process are the updated variables `codIRange` and `codIOffset`, and the decoded value `binVal`.

This special decoding routine applies to decoding of `end_of_slice_flag` and `pcm_flag` corresponding to `ctxIdxTable` equal to 0 and `ctxIdx` equal to 0. [Figure 9-5](#) shows the flowchart of the corresponding decoding process, which is specified as follows.

First, the value of `codIRange` is decremented by 2. Then, the value of `codIOffset` is compared to the value of `codIRange` and further steps are specified as follows.

- If `codIOffset` is greater than or equal to `codIRange`, the variable `binVal` is set equal to 1, no renormalization is carried out, and CABAC decoding is terminated. The last bit inserted in register `codIOffset` is equal to 1. When decoding `end_of_slice_flag`, this last bit inserted in register `codIOffset` is interpreted as `rbsp_stop_one_bit`.
- Otherwise (`codIOffset` is less than `codIRange`), the variable `binVal` is set equal to 0 and renormalization is performed as specified in subclause 9.3.3.2.2.

NOTE – This procedure may also be implemented using `DecodeDecision(ctxIdxTable, ctxIdx)` with `ctxIdxTable = 0` and `ctxIdx = 0`. In the case where the decoded value is equal to 1, seven more bits would be read by `DecodeDecision(ctxIdxTable, ctxIdx)` and a decoding process would have to adjust its bitstream pointer accordingly to properly decode following syntax elements.

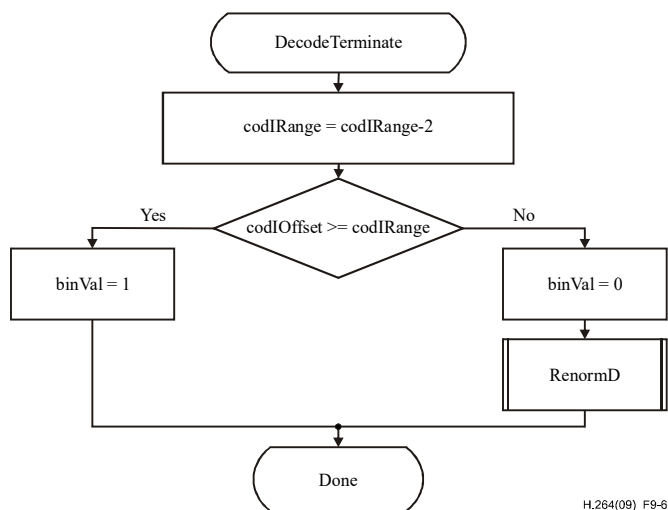

H.264(09)_F9-6

Figure 9-5 – Flowchart of decoding a decision before termination

9.3.4 Arithmetic encoding process (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

Inputs to this process are decisions that are to be encoded and written.

Outputs of this process are bits that are written to the RBSP.

This informative subclause describes an arithmetic encoding engine that matches the arithmetic decoding engine described in subclause 9.3.3.2. The encoding engine is essentially symmetric with the decoding engine, i.e., procedures are called in the same order. The following procedures are described in this section: InitEncoder, EncodeDecision, EncodeBypass, EncodeTerminate, which correspond to InitDecoder, DecodeDecision, DecodeBypass, and DecodeTerminate, respectively. The state of the arithmetic encoding engine is represented by a value of the variable codILow pointing to the lower end of a sub-interval and a value of the variable codIRange specifying the corresponding range of that sub-interval.

9.3.4.1 Initialisation process for the arithmetic encoding engine (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

This process is invoked before encoding the first macroblock of a slice, and after encoding any pcm_alignment_zero_bit and all pcm_sample_luma and pcm_sample_chroma data for a **macroblock-coding unit** of type I_PCM.

Outputs of this process are the values codILow, codIRange, firstBitFlag, bitsOutstanding, and BinCountsInNALunits of the arithmetic encoding engine.

In the initialisation procedure of the encoder, codILow is set equal to 0, and codIRange is set equal to 510. Furthermore, firstBitFlag is set equal to 1 and the counter bitsOutstanding is set equal to 0.

Depending on whether the current slice is the first slice of a coded picture, the following applies.

- If the current slice is the first slice of a coded picture, the counter BinCountsInNALunits is set equal to 0.
- Otherwise (the current slice is not the first slice of a coded picture), the counter BinCountsInNALunits is not modified. The value of BinCountsInNALunits is the result of encoding all the slices of a coded picture that precede the current slice in decoding order. After initialising for the first slice of a coded picture as specified in this subclause, BinCountsInNALunits is incremented as specified in subclauses 9.3.4.2, 9.3.4.4, and 9.3.4.5.

NOTE – The minimum register precision required for storing the values of the variables codILow and codIRange after invocation of any of the arithmetic encoding processes specified in subclauses 9.3.4.2, 9.3.4.4, and 9.3.4.5 is 10 bits and 9 bits, respectively. The encoding process for a binary decision (EncodeDecision) as specified in subclause 9.3.4.2 and the encoding process for a binary decision before termination (EncodeTerminate) as specified in subclause 9.3.4.5 require a minimum register precision of 10 bits for the variable codILow and a minimum register precision of 9 bits for the variable codIRange. The bypass encoding process for binary decisions (EncodeBypass) as specified in subclause 9.3.4.4 requires a minimum register precision of 11 bits for the variable codILow and a minimum register precision of 9 bits for the variable codIRange. The precision required for the

HEVC

counters bitsOutstanding and BinCountsInNALunits should be sufficiently large to prevent overflow of the related registers. When maxBinCountInSlice denotes the maximum total number of binary decisions to encode in one slice and maxBinCountInPic denotes the maximum total number of binary decisions to encode a picture, the minimum register precision required for the variables bitsOutstanding and BinCountsInNALunits is given by $\text{Ceil}(\text{Log2}(\text{maxBinCountInSlice} + 1))$ and $\text{Ceil}(\text{Log2}(\text{maxBinCountInPic} + 1))$, respectively.

9.3.4.2 Encoding process for a binary decision (informative)

This subclause does not form an integral part of this Recommendation | International Standard.


Inputs to this process are the context index ctxIdx, the value of binVal to be encoded, and the variables codIRange, codILow and BinCountsInNALunits.

Outputs of this process are the variables codIRange, codILow, and BinCountsInNALunits.

Figure 9-6 shows the flowchart for encoding a single decision. In a first step, the variable codIRangeLPS is derived as follows.

Given the current value of codIRange, codIRange is mapped to the index qCodIRangeIdx of a quantised value of codIRange by using Equation 9-779-6. The value of qCodIRangeIdx and the value of pStateIdx associated with ctxIdx are used to determine the value of the variable rangeTabLPS as specified in Table 9-52, which is assigned to codIRangeLPS. The value of codIRange – codIRangeLPS is assigned to codIRange.

In a second step, the value of binVal is compared to valMPS associated with ctxIdx. When binVal is different from valMPS, codIRange is added to codILow and codIRange is set equal to the value codIRangeLPS. Given the encoded decision, the state transition is performed as specified in subclause 9.3.3.2.1.1. Depending on the current value of codIRange, renormalization is performed as specified in subclause 9.3.4.3. Finally, the variable BinCountsInNALunits is incremented by 1.

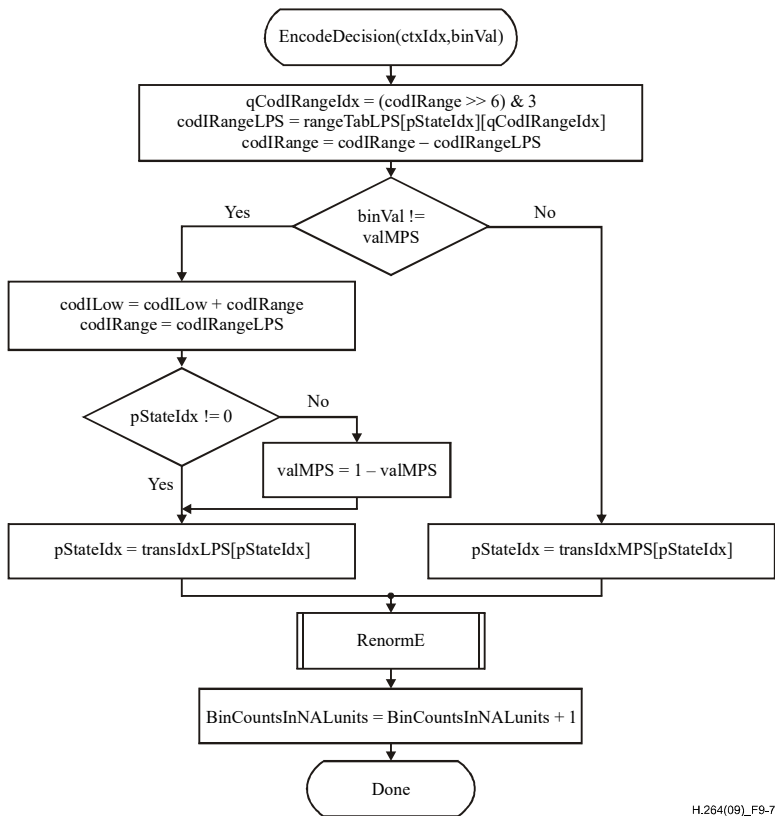

H.264(09)_F9-7

Figure 9-6 – Flowchart for encoding a decision


9.3.4.3 Renormalization process in the arithmetic encoding engine (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

Inputs to this process are the variables `codIRange`, `codILow`, `firstBitFlag`, and `bitsOutstanding`.

Outputs of this process are zero or more bits written to the RBSP and the updated variables `codIRange`, `codILow`, `firstBitFlag`, and `bitsOutstanding`.

Renormalization is illustrated in [Figure 9-7](#)[Figure 9-7](#).

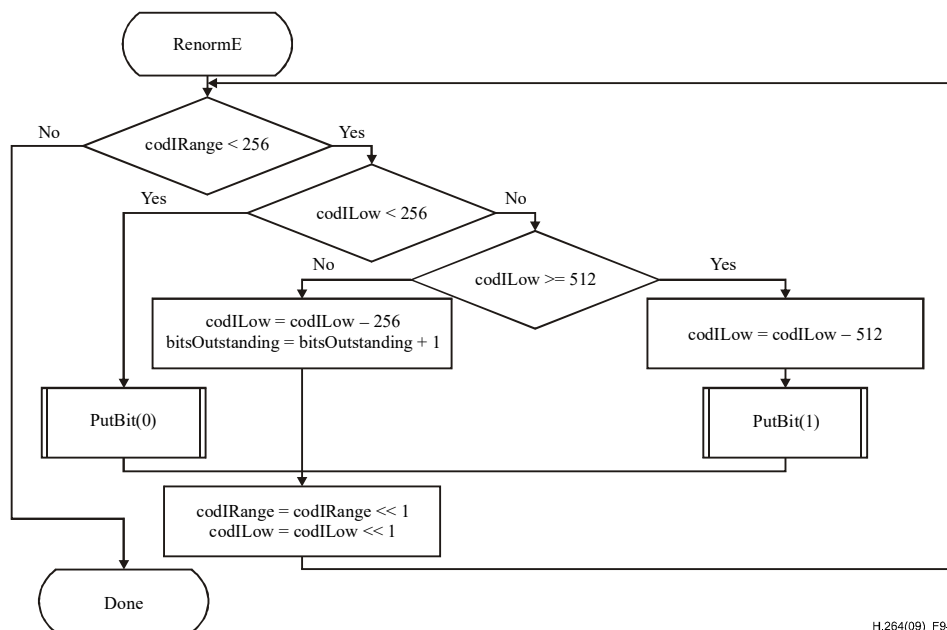

H.264(09)_F9-8

Figure 9-7 – Flowchart of renormalization in the encoder

The `PutBit( )` procedure described in [Figure 9-8](#)[Figure 9-8](#) provides carry over control. It uses the function `WriteBits( B, N )` that writes N bits with value B to the bitstream and advances the bitstream pointer by N bit positions. This function assumes the existence of a bitstream pointer with an indication of the position of the next bit to be written to the bitstream by the encoding process.

HEVC

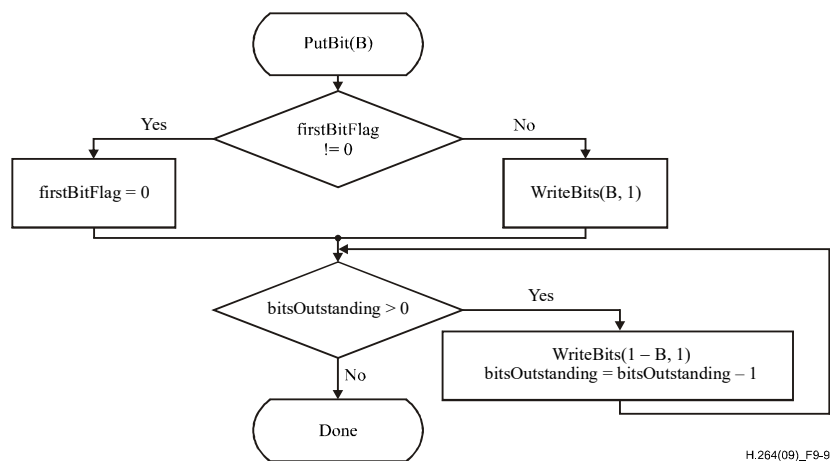


Figure 9-8 – Flowchart of PutBit(B)

9.3.4.4 Bypass encoding process for binary decisions (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

Inputs to this process are the variables binVal, codILow, codIRange, bitsOutstanding, and BinCountsInNALunits.

Output of this process is a bit written to the RBSP and the updated variables codILow, bitsOutstanding, and BinCountsInNALunits.

This encoding process applies to all binary decisions with bypassFlag equal to 1. Renormalization is included in the specification of this process as given in [Figure 9-9](#).

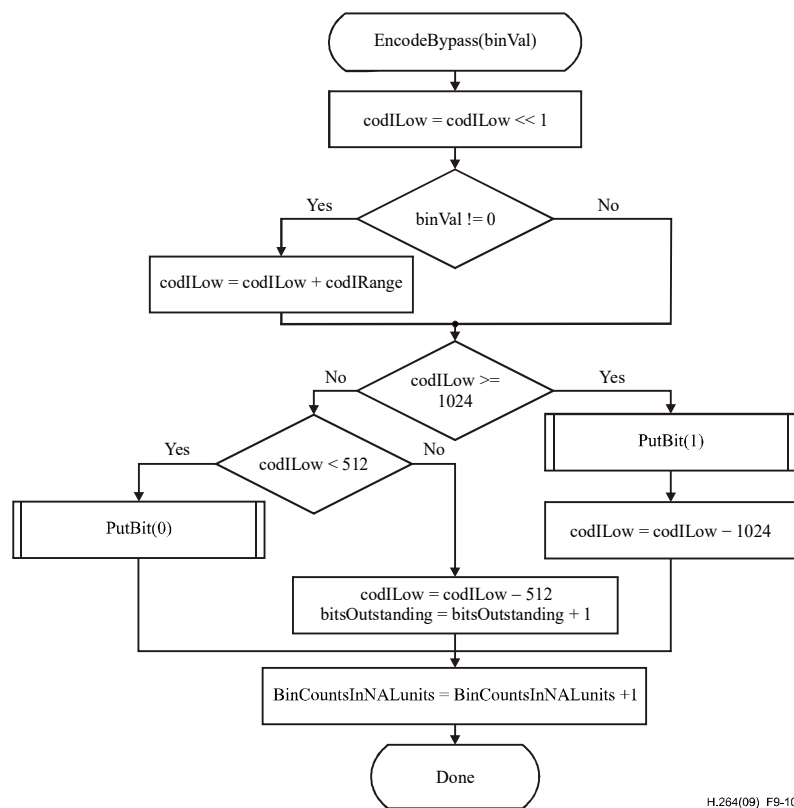


Figure 9-9 – Flowchart of encoding bypass

9.3.4.5 Encoding process for a binary decision before termination (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

Inputs to this process are the variables `binVal`, `codIRange`, `codILow`, `bitsOutstanding`, and `BinCountsInNALunits`.

Outputs of this process are zero or more bits written to the RBSP and the updated variables `codILow`, `codIRange`, `bitsOutstanding`, and `BinCountsInNALunits`.

This encoding routine shown in [Figure 9-10](#) applies to encoding of the `end_of_slice_flag` and `pcm_flag` of the `bin` indicating the `I_PCM` `mb_type` mode both associated with `ctxIdx` equal to 276.

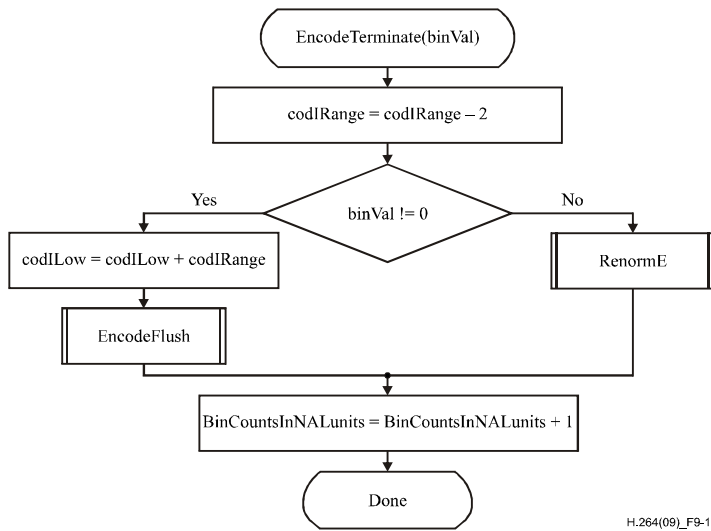


Figure 9-10 – Flowchart of encoding a decision before termination

When the value of binVal to encode is equal to 1, CABAC encoding is terminated and the flushing procedure shown in [Figure 9-11](#) is applied. In this flushing procedure, the last bit written by WriteBits(B, N) is equal to 1. When encoding end_of_slice_flag, this last bit is interpreted as the rbsp_stop_one_bit.

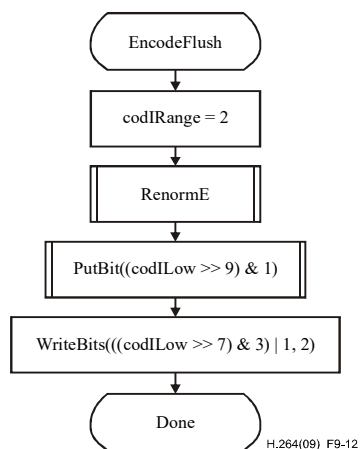


Figure 9-11 – Flowchart of flushing at termination

9.3.4.6 Byte stuffing process (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

This process is invoked after encoding the last macroblock of the last slice of a picture and after encapsulation.

Inputs to this process are the number of bytes `NumBytesInVclNALunits` of all VCL NAL units of a picture, the number of macroblocks `PicSizeInMbs` in the picture, and the number of binary symbols `BinCountsInNALunits` resulting from encoding the contents of all VCL NAL units of the picture.

NOTE – The value of `BinCountsInNALunits` is the result of encoding all slices of a coded picture. After initialising for the first slice of a coded picture as specified in subclause 9.3.4.1, `BinCountsInNALunits` is incremented as specified in subclauses 9.3.4.2, 9.3.4.4, and 9.3.4.5.

Outputs of this process are zero or more bytes appended to the NAL unit.

Let the variable `k` be set equal to $\text{Ceil}((\text{Ceil}(3 * (\text{Ceil}(32 * \text{BinCountsInNALunits} - \text{RawMbBits} * \text{PicSizeInMbs}) \div 1024) - \text{NumBytesInVclNALunits}) \div 3))$. Depending on the variable `k` the following applies.

- If `k` is less than or equal to 0, no `cabac_zero_word` is appended to the NAL unit.
- Otherwise (`k` is greater than 0), the 3-byte sequence `0x000003` is appended `k` times to the NAL unit after encapsulation, where the first two bytes `0x0000` represent a `cabac_zero_word` and the third byte `0x03` represents an `emulation_prevention_three_byte`.

Annex A

Profiles and levels

(This annex forms an integral part of this Recommendation | International Standard)

Profiles and levels specify restrictions on bitstreams and hence limits on the capabilities needed to decode the bitstreams. Profiles and levels may also be used to indicate interoperability points between individual decoder implementations.

NOTE 1 – This Recommendation | International Standard does not include individually selectable "options" at the decoder, as this would increase interoperability difficulties.

Each profile specifies a subset of algorithmic features and limits that shall be supported by all decoders conforming to that profile.

NOTE 2 – Encoders are not required to make use of any particular subset of features supported in a profile.

Each level specifies a set of limits on the values that may be taken by the syntax elements of this Recommendation | International Standard. The same set of level definitions is used with all profiles, but individual implementations may support a different level for each supported profile. For any given profile, levels generally correspond to decoder processing load and memory capability.

The profiles that are specified in subclause A.2 are also referred to as the profiles specified in Annex A.

A.1 Requirements on video decoder capability

Capabilities of video decoders conforming to this Recommendation | International Standard are specified in terms of the ability to decode video streams conforming to the constraints of profiles and levels specified in this annex. For each such profile, the level supported for that profile shall also be expressed.

Specific values are specified in this annex for the syntax elements `profile_idc` and `level_idc`. All other values of `profile_idc` and `level_idc` are reserved for future use by ITU-T | ISO/IEC.

NOTE – Decoders should not infer that when a reserved value of `profile_idc` or `level_idc` falls between the values specified in this Recommendation | International Standard that this indicates intermediate capabilities between the specified profiles or levels, as there are no restrictions on the method to be chosen by ITU-T | ISO/IEC for the use of such future reserved values.

A.2 Profiles

All constraints for picture parameter sets that are specified are constraints for picture parameter sets that are activated in the bitstream. All constraints for sequence parameter sets that are specified in subclause A.2.1 are constraints for sequence parameter sets that are activated in the bitstream.

A.2.1 ABC profile

A.3 Levels

HEVC

Table A-9-549-54 – Level limits [Ed. (TW) Kept for convenience]

Level number	Max macroblock processing rate MaxMBPS (MB/s)	Max picture size MaxFS (MBs)	Max decoded picture buffer size MaxDpbMbs (MBs)	Max video bit rate MaxBR (1000 bits/s, cpbBrVclFactor bits/s, or cpbBrNalFactor bits/s)	Max CPB size MaxCPB (1000 bits, 1200 bits, cpbBrVclFactor bits, or cpbBrNalFactor bits)	Vertical MV component range MaxVmvR (luma picture samples)	Min compression ratio MinCR	Max number of motion vectors per two consecutive MBs MaxMvsPer2Mb
1	1 485	99	396	64	175	[−64,+63.75]	2	-
1b	1 485	99	396	128	350	[−64,+63.75]	2	-
1.1	3 000	396	900	192	500	[−128,+127.75]	2	-
1.2	6 000	396	2 376	384	1 000	[−128,+127.75]	2	-
1.3	11 880	396	2 376	768	2 000	[−128,+127.75]	2	-
2	11 880	396	2 376	2 000	2 000	[−128,+127.75]	2	-
2.1	19 800	792	4 752	4 000	4 000	[−256,+255.75]	2	-
2.2	20 250	1 620	8 100	4 000	4 000	[−256,+255.75]	2	-
3	40 500	1 620	8 100	10 000	10 000	[−256,+255.75]	2	32
3.1	108 000	3 600	18 000	14 000	14 000	[−512,+511.75]	4	16
3.2	216 000	5 120	20 480	20 000	20 000	[−512,+511.75]	4	16
4	245 760	8 192	32 768	20 000	25 000	[−512,+511.75]	4	16
4.1	245 760	8 192	32 768	50 000	62 500	[−512,+511.75]	2	16
4.2	522 240	8 704	34 816	50 000	62 500	[−512,+511.75]	2	16
5	589 824	22 080	110 400	135 000	135 000	[−512,+511.75]	2	16
5.1	983 040	36 864	184 320	240 000	240 000	[−512,+511.75]	2	16

Levels with non-integer level numbers in Table A-9-54Table A-9-8 are referred to as "intermediate levels".

NOTE 4 – All levels have the same status, but some applications may choose to use only the integer-numbered levels.

HEVC

Annex B

Byte stream format

(This annex forms an integral part of this Recommendation | International Standard)

This annex specifies syntax and semantics of a byte stream format specified for use by applications that deliver some or all of the NAL unit stream as an ordered stream of bytes or bits within which the locations of NAL unit boundaries need to be identifiable from patterns in the data, such as ITU-T Rec. H.222.0 | ISO/IEC 13818-1 systems or ITU-T Rec. H.320 systems. For bit-oriented delivery, the bit order for the byte stream format is specified to start with the MSB of the first byte, proceed to the LSB of the first byte, followed by the MSB of the second byte, etc.

The byte stream format consists of a sequence of byte stream NAL unit syntax structures. Each byte stream NAL unit syntax structure contains one start code prefix followed by one `nal_unit( NumBytesInNALunit )` syntax structure. It may (and under some circumstances, it shall) also contain an additional `zero_byte` syntax element. It may also contain one or more additional `trailing_zero_8bits` syntax elements. When it is the first byte stream NAL unit in the bitstream, it may also contain one or more additional `leading_zero_8bits` syntax elements.

B.1 Byte stream NAL unit syntax and semantics

B.1.1 Byte stream NAL unit syntax

byte_stream_nal_unit(NumBytesInNALunit) {	C	Descriptor
while(next_bits(24) != 0x000001 && next_bits(32) != 0x00000001)		
leading_zero_8bits /* equal to 0x00 */		f(8)
if(next_bits(24) != 0x000001)		
zero_byte /* equal to 0x00 */		f(8)
start_code_prefix_one_3bytes /* equal to 0x000001 */		f(24)
<code>nal_unit(NumBytesInNALunit)</code>		
while(more_data_in_byte_stream() && next_bits(24) != 0x000001 && next_bits(32) != 0x00000001)		
trailing_zero_8bits /* equal to 0x00 */		f(8)
}		

B.1.2 Byte stream NAL unit semantics

The order of byte stream NAL units in the byte stream shall follow the decoding order of the NAL units contained in the byte stream NAL units (see subclause 7.4.1.2). The content of each byte stream NAL unit is associated with the same access unit as the NAL unit contained in the byte stream NAL unit (see subclause 7.4.1.2.37.4.1.2.3).

leading_zero_8bits is a byte equal to 0x00.

NOTE – The `leading_zero_8bits` syntax element can only be present in the first byte stream NAL unit of the bitstream, because (as shown in the syntax diagram of subclause B.1.1) any bytes equal to 0x00 that follow a NAL unit syntax structure and precede the four-byte sequence 0x00000001 (which is to be interpreted as a `zero_byte` followed by a `start_code_prefix_one_3bytes`) will be considered to be `trailing_zero_8bits` syntax elements that are part of the preceding byte stream NAL unit.

zero_byte is a single byte equal to 0x00.

When any of the following conditions are fulfilled, the `zero_byte` syntax element shall be present:

- the `nal_unit_type` within the `nal_unit( )` is equal to 7 (sequence parameter set) or 8 (picture parameter set),
- the byte stream NAL unit syntax structure contains the first NAL unit of an access unit in decoding order, as specified by subclause 7.4.1.2.3.

start_code_prefix_one_3bytes is a fixed-value sequence of 3 bytes equal to 0x000001. This syntax element is called a start code prefix.

trailing_zero_8bits is a byte equal to 0x00.

HEVC

B.2 Byte stream NAL unit decoding process

Input to this process consists of an ordered stream of bytes consisting of a sequence of byte stream NAL unit syntax structures.

Output of this process consists of a sequence of NAL unit syntax structures.

At the beginning of the decoding process, the decoder initialises its current position in the byte stream to the beginning of the byte stream. It then extracts and discards each leading `zero_8bits` syntax element (if present), moving the current position in the byte stream forward one byte at a time, until the current position in the byte stream is such that the next four bytes in the bitstream form the four-byte sequence `0x00000001`.

The decoder then performs the following step-wise process repeatedly to extract and decode each NAL unit syntax structure in the byte stream until the end of the byte stream has been encountered (as determined by unspecified means) and the last NAL unit in the byte stream has been decoded:

1. When the next four bytes in the bitstream form the four-byte sequence `0x00000001`, the next byte in the byte stream (which is a `zero_byte` syntax element) is extracted and discarded and the current position in the byte stream is set equal to the position of the byte following this discarded byte.
2. The next three-byte sequence in the byte stream (which is a `start_code_prefix_one_3bytes`) is extracted and discarded and the current position in the byte stream is set equal to the position of the byte following this three-byte sequence.
3. `NumBytesInNALunit` is set equal to the number of bytes starting with the byte at the current position in the byte stream up to and including the last byte that precedes the location of any of the following conditions:
 - A subsequent byte-aligned three-byte sequence equal to `0x00000000`,
 - A subsequent byte-aligned three-byte sequence equal to `0x00000001`,
 - The end of the byte stream, as determined by unspecified means.
4. `NumBytesInNALunit` bytes are removed from the bitstream and the current position in the byte stream is advanced by `NumBytesInNALunit` bytes. This sequence of bytes is `nal_unit( NumBytesInNALunit )` and is decoded using the NAL unit decoding process.
5. When the current position in the byte stream is not at the end of the byte stream (as determined by unspecified means) and the next bytes in the byte stream do not start with a three-byte sequence equal to `0x00000001` and the next bytes in the byte stream do not start with a four byte sequence equal to `0x000000001`, the decoder extracts and discards each trailing `zero_8bits` syntax element, moving the current position in the byte stream forward one byte at a time, until the current position in the byte stream is such that the next bytes in the byte stream form the four-byte sequence `0x00000001` or the end of the byte stream has been encountered (as determined by unspecified means).

B.3 Decoder byte-alignment recovery (informative)

This subclause does not form an integral part of this Recommendation | International Standard.

Many applications provide data to a decoder in a manner that is inherently byte aligned, and thus have no need for the bit-oriented byte alignment detection procedure described in this subclause.

A decoder is said to have byte-alignment with a bitstream when the decoder is able to determine whether or not the positions of data in the bitstream are byte-aligned. When a decoder does not have byte alignment with the encoder's byte stream, the decoder may examine the incoming bitstream for the binary pattern '00000000 00000000 00000000 00000001' (31 consecutive bits equal to 0 followed by a bit equal to 1). The bit immediately following this pattern is the first bit of an aligned byte following a start code prefix. Upon detecting this pattern, the decoder will be byte aligned with the encoder and positioned at the start of a NAL unit in the byte stream.

Once byte aligned with the encoder, the decoder can examine the incoming byte stream for subsequent three-byte sequences `0x000001` and `0x000003`.

When the three-byte sequence `0x000001` is detected, this is a start code prefix.

When the three-byte sequence `0x000003` is detected, the third byte (`0x03`) is an `emulation_prevention_three_byte` to be discarded as specified in subclause 7.4.1.

When an error in the bitstream syntax is detected (e.g., a non-zero value of the `forbidden_zero_bit` or one of the three-byte or four-byte sequences that are prohibited in subclause 7.4.1), the decoder may consider the detected condition as an indication that byte alignment may have been lost and may discard all bitstream data until the detection of byte alignment at a later position in the bitstream as described in this subclause.

HEVC

Annex C

Hypothetical reference decoder

(This annex forms an integral part of this Recommendation | International Standard)

This annex specifies the hypothetical reference decoder (HRD) and its use to check bitstream and decoder conformance.

Two types of bitstreams are subject to HRD conformance checking for this Recommendation | International Standard. The first such type of bitstream, called Type I bitstream, is a NAL unit stream containing only the VCL NAL units and filler data NAL units for all access units in the bitstream. The second type of bitstream, called a Type II bitstream, contains, in addition to the VCL NAL units and filler data NAL units for all access units in the bitstream, at least one of the following:

- additional non-VCL NAL units other than filler data NAL units,
- all `leading_zero_8bits`, `zero_byte`, `start_code_prefix_one_3bytes`, and `trailing_zero_8bits` syntax elements that form a byte stream from the NAL unit stream (as specified in Annex B).

Figure C-9-12 shows the types of bitstream conformance points checked by the HRD.

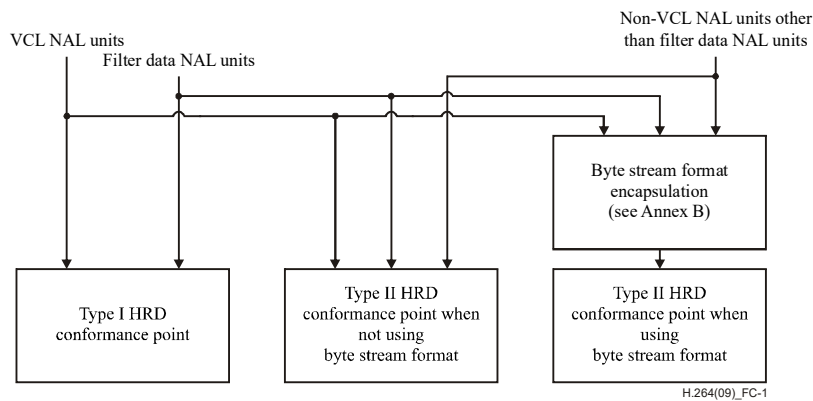


Figure C-9-12 – Structure of byte streams and NAL unit streams for HRD conformance checks

The syntax elements of non-VCL NAL units (or their default values for some of the syntax elements), required for the HRD, are specified in the semantic subclauses of clause 6.67, Annexes D and E.

The HRD contains a coded picture buffer (CPB), an instantaneous decoding process, a decoded picture buffer (DPB), and output cropping as shown in Figure C-9-13.

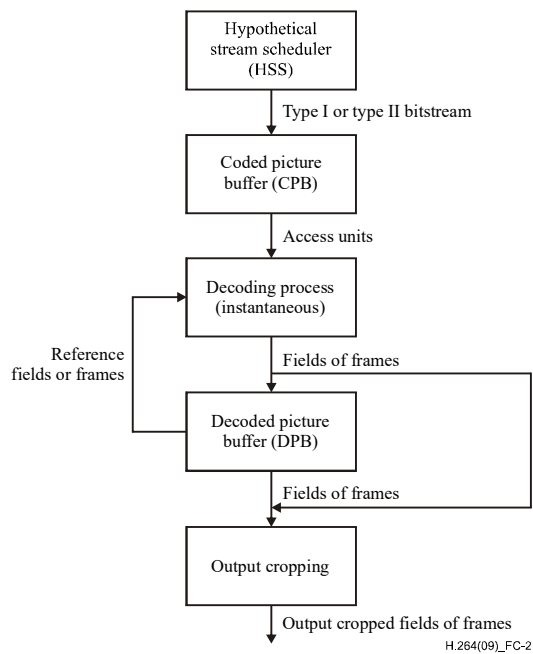


Figure C-9-13 – HRD buffer model

C.1 Operation of coded picture buffer (CPB)

The specifications in this subclause apply independently to each set of CPB parameters that is present and to both the Type I and Type II conformance points shown in [Figure C-9-12](#).

C.1.1 Timing of bitstream arrival

C.1.2 Timing of coded picture removal

C.2 Operation of the decoded picture buffer (DPB)

C.3 Bitstream conformance

C.4 Decoder conformance

HEVC

Annex D

Supplemental enhancement information

(This annex forms an integral part of this Recommendation | International Standard)

This annex specifies syntax and semantics for SEI message payloads.

SEI messages assist in processes related to decoding, display or other purposes. However, SEI messages are not required for constructing the luma or chroma samples by the decoding process. Conforming decoders are not required to process this information for output order conformance to this Recommendation | International Standard (see Annex 0 for the specification of conformance). Some SEI message information is required to check bitstream conformance and for output timing decoder conformance.

In Annex D, specification for presence of SEI messages are also satisfied when those messages (or some subset of them) are conveyed to decoders (or to the HRD) by other means not specified by this Recommendation | International Standard. When present in the bitstream, SEI messages shall obey the syntax and semantics specified in subclauses 7.3.2.3 and 0 and this annex. When the content of an SEI message is conveyed for the application by some means other than presence within the bitstream, the representation of the content of the SEI message is not required to use the same syntax specified in this annex. For the purpose of counting bits, only the appropriate bits that are actually present in the bitstream are counted.

D.1 SEI payload syntax

[Ed. (TW): insert table]

D.2 SEI payload semantics

HEVC

Annex E

Video usability information

(This annex forms an integral part of this Recommendation | International Standard)

This annex specifies syntax and semantics of the VUI parameters of the sequence parameter sets.

VUI parameters are not required for constructing the luma or chroma samples by the decoding process. Conforming decoders are not required to process this information for output order conformance to this Recommendation | International Standard (see Annex 0 for the specification of conformance). Some VUI parameters are required to check bitstream conformance and for output timing decoder conformance.

In Annex E, specification for presence of VUI parameters is also satisfied when those parameters (or some subset of them) are conveyed to decoders (or to the HRD) by other means not specified by this Recommendation | International Standard. When present in the bitstream, VUI parameters shall follow the syntax and semantics specified in subclauses 7.3.2.1 and 7.4.2.1 and this annex. When the content of VUI parameters is conveyed for the application by some means other than presence within the bitstream, the representation of the content of the VUI parameters is not required to use the same syntax specified in this annex. For the purpose of counting bits, only the appropriate bits that are actually present in the bitstream are counted.

E.1 VUI syntax

E.1.1 VUI parameters syntax

[Ed. (TW): insert table]

E.2 VUI semantics

HEVC

Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			
Page 104: [1] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
English (United Kingdom)			

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [1] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [2] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [2] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←
▲	Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM	
	English (United Kingdom)			←

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted JCTVC-E069 6/27/2011 1:32:00 PM

English (United Kingdom)

Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		
Page 104: [3] Formatted	JCTVC-E069	6/27/2011 1:32:00 PM
English (United Kingdom)		