



US010734481B2

(12) **United States Patent**
Rao

(10) **Patent No.:** **US 10,734,481 B2**
(45) **Date of Patent:** **Aug. 4, 2020**

(54) **SEMICONDUCTOR DEVICES WITH
GRADED DOPANT REGIONS**

H01L 29/7395 (2013.01); *H01L 27/0214*
(2013.01); *H01L 27/10844* (2013.01)

(71) Applicant: **GREENTHREAD, LLC**, Dallas, TX
(US)

(58) **Field of Classification Search**

CPC *H01L 29/1095*

USPC 257/25

See application file for complete search history.

(72) Inventor: **G. R. Mohan Rao**, Allen, TX (US)

(73) Assignee: **Greenthread, LLC**, Dallas, TX (US)

(56)

References Cited

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

U.S. PATENT DOCUMENTS

4,001,864 A 1/1977 Gibbons

4,160,985 A 7/1979 Kamins et al.

(Continued)

(21) Appl. No.: **16/717,950**

(22) Filed: **Dec. 17, 2019**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2020/0127095 A1 Apr. 23, 2020

P.D. Moor, Advanced CMOS-based pixel sensors, <https://indico.cern.ch/event/122027/contributions/88236/attachments/69340/99377/FEEimecPdM.pdf>, 2011, 41 pages.

(Continued)

Related U.S. Application Data

(60) Continuation of application No. 15/590,282, filed on
May 9, 2017, now Pat. No. 10,510,842, which is a
continuation of application No. 14/931,636, filed on
Nov. 3, 2015, now Pat. No. 9,647,070, which is a
continuation of application No. 14/515,584, filed on
(Continued)

Primary Examiner — Ajay Arora

(74) *Attorney, Agent, or Firm* — Bill R. Naifeh

(51) **Int. Cl.**

H01L 29/06 (2006.01)

H01L 29/10 (2006.01)

H01L 29/36 (2006.01)

H01L 29/739 (2006.01)

H01L 27/146 (2006.01)

H01L 27/1524 (2017.01)

H01L 27/1521 (2017.01)

H01L 27/02 (2006.01)

H01L 27/108 (2006.01)

(52) **U.S. Cl.**


CPC *H01L 29/1095* (2013.01); *H01L 27/1521*
(2013.01); *H01L 27/1524* (2013.01); *H01L*
27/14643 (2013.01); *H01L 29/36* (2013.01);

(57)

ABSTRACT

Most semiconductor devices manufactured today, have uniform dopant concentration, either in the lateral or vertical device active (and isolation) regions. By grading the dopant concentration, the performance in various semiconductor devices can be significantly improved. Performance improvements can be obtained in application specific areas like increase in frequency of operation for digital logic, various power MOSFET and IGBT ICs, improvement in refresh time for DRAMs, decrease in programming time for nonvolatile memory, better visual quality including pixel resolution and color sensitivity for imaging ICs, better sensitivity for varactors in tunable filters, higher drive capabilities for JFETs, and a host of other applications.

36 Claims, 10 Drawing Sheets

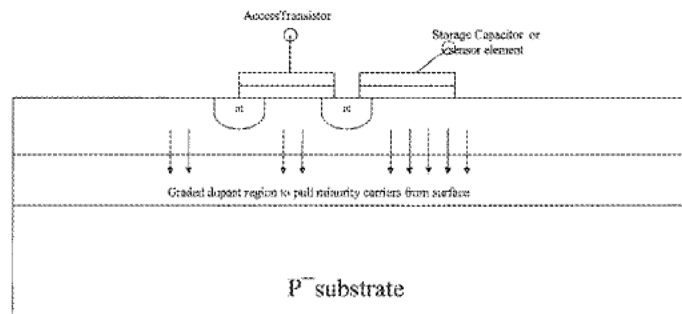

Related U.S. Application Data

Oct. 16, 2014, now Pat. No. 9,190,502, which is a continuation of application No. 13/854,319, filed on Apr. 1, 2013, now abandoned, which is a continuation of application No. 11/622,496, filed on Jan. 12, 2007, now Pat. No. 8,421,195, which is a division of application No. 10/934,915, filed on Sep. 3, 2004, now abandoned.

(56)

References Cited**U.S. PATENT DOCUMENTS**


4,347,654 A 9/1982 Allen et al.
 4,481,522 A 11/1984 Jastrzebski et al.
 4,866,000 A 9/1989 Okita
 5,029,277 A 7/1991 Kane
 5,130,262 A 7/1992 Masquelier et al.
 5,213,988 A 5/1993 Yamauchi et al.
 5,262,345 A 11/1993 Nasser et al.
 5,329,144 A 7/1994 Luryi
 5,448,087 A 9/1995 Streit et al.
 5,480,816 A 1/1996 Uga et al.
 5,496,746 A 3/1996 Matthews
 5,517,052 A 5/1996 Ishaque
 5,569,612 A 10/1996 Frisina et al.
 5,575,862 A 11/1996 Nishida
 5,637,898 A 6/1997 Baliga
 5,797,999 A 8/1998 Sannomiya et al.
 5,888,857 A 3/1999 Zhang et al.
 5,973,575 A 10/1999 Kamogawa et al.
 6,211,028 B1 4/2001 Tsai et al.
 6,310,366 B1 10/2001 Rhodes et al.
 RE37,441 E 11/2001 Yamazaki
 6,452,086 B1 9/2002 Muller
 6,465,862 B1 10/2002 Harris
 6,472,715 B1 10/2002 Liu et al.
 6,670,544 B2 12/2003 Kibbel et al.
 6,683,343 B2 1/2004 Matsudai et al.
 6,696,314 B2 2/2004 Rhodes
 6,706,550 B2 3/2004 Lee et al.
 6,713,813 B2 3/2004 Marchant
 6,720,622 B1 4/2004 Yu
 6,737,722 B2 5/2004 Yamamoto et al.
 6,744,117 B2 6/2004 Dragon et al.
 6,747,883 B2 6/2004 Yasumura
 6,753,202 B2 6/2004 Chen et al.
 6,754,093 B2 6/2004 Lien
 6,756,616 B2 6/2004 Rhodes
 6,780,713 B2 8/2004 Bromberger et al.
 6,831,292 B2 12/2004 Currie et al.
 6,878,603 B2 4/2005 Bromberger et al.
 6,921,946 B2 7/2005 Kenney et al.
 6,933,215 B2 8/2005 Bromberger et al.
 7,064,385 B2 6/2006 Dudek et al.

7,115,925 B2 10/2006 Rhodes
 7,233,044 B2 6/2007 Dudek
 7,307,327 B2 12/2007 Bahl et al.
 7,504,692 B2 3/2009 Dudek et al.
 8,164,124 B2 4/2012 Liu et al.
 8,421,195 B2 4/2013 Rao
 9,190,502 B2 11/2015 Rao
 9,647,070 B2 5/2017 Rao
 10,510,842 B2 12/2019 Rao
 2001/0040622 A1 11/2001 Maruyama
 2002/0056883 A1 5/2002 Baliga
 2002/0074585 A1 6/2002 Tsang et al.
 2002/0084430 A1 7/2002 Bamji et al.
 2002/0093281 A1 7/2002 Cathey
 2002/0102783 A1 8/2002 Fujimoto et al.
 2002/0134419 A1 9/2002 Maoris
 2003/0026126 A1 2/2003 Uemura
 2003/0030488 A1* 2/2003 Hueting H01L 29/0821
 330/57
 2003/0042511 A1 3/2003 Rhodes
 2004/0027753 A1 2/2004 Friedrichs et al.
 2004/0063288 A1 4/2004 Kenney et al.
 2006/0113592 A1 6/2006 Pendharkar et al.
 2007/0045682 A1* 3/2007 Hong H01L 27/14601
 257/292
 2012/0048462 A1 3/2012 Lee
 2013/0001661 A1 1/2013 Mao et al.
 2015/0200314 A1 7/2015 Webster

OTHER PUBLICATIONS

E. Parton, CMOS Sensors, Laser Focus World, <http://www.laserfocusworld.com/articles/print/volume-49/issue-10/features/cmos-sensors-cmos-based-specialty-imagers-reach-new-performance-levels.html>, Oct. 14, 2013, 5 pages.
 Z. Cao, Design of Pixel for High Speed CMOS Image Sensors, http://www.imagesensors.org/Past%20Workshops/2013%20Workshop/2013%20Papers/07-11_072-Cao_papers.pdf, 4 pages.
 M. Tanenbaum, BSTJ: Diffused Emitter and Base Silicon Transistors, The Bell System Technical Journal, Jan. 1956, 22 pages, vol. XXXV, <https://archive.org/details/bstj35-1-1>.
 IMEC Image Sensors and Vision Systems, <http://www2.imec.be/content/user/File/Brochures/cmos%20imagers%20brochure-april26.pdf>, Apr. 2014, 2 pages.
 A.S. Grove, Physics and Technology of Semiconductor Devices, John Wiley Sons, Inc., New York, Nov. 1967.
 W. Murray Bullis and W. R. Runyan, Influence of Mobility and Lifetime Variations on Drift-Field Effects in Silicon-Junction Devices, IEEE Transactions on Electron Devices, vol. Ed-14, No. 2, Feb. 1967.
 Berinder Brar et al., Herb's Bipolar Transistors, IEEE Transactions on Electron Devices, vol. 48, No. 11, Nov. 2001.

* cited by examiner

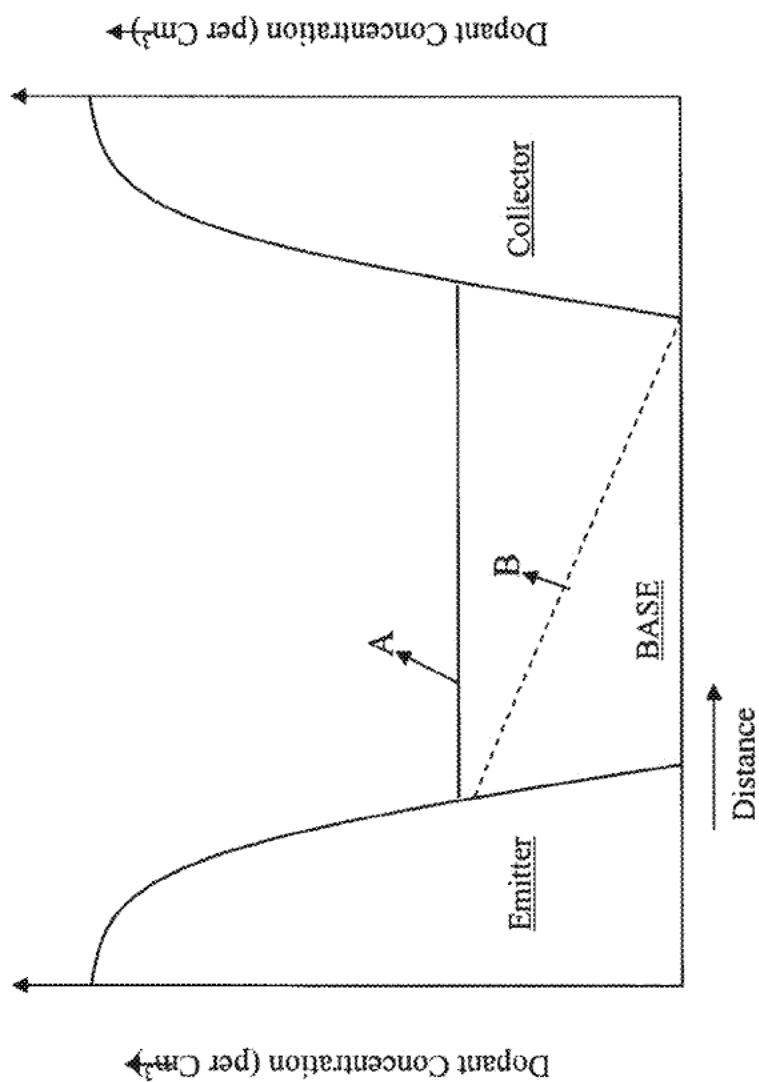Figure 1 Prior Art

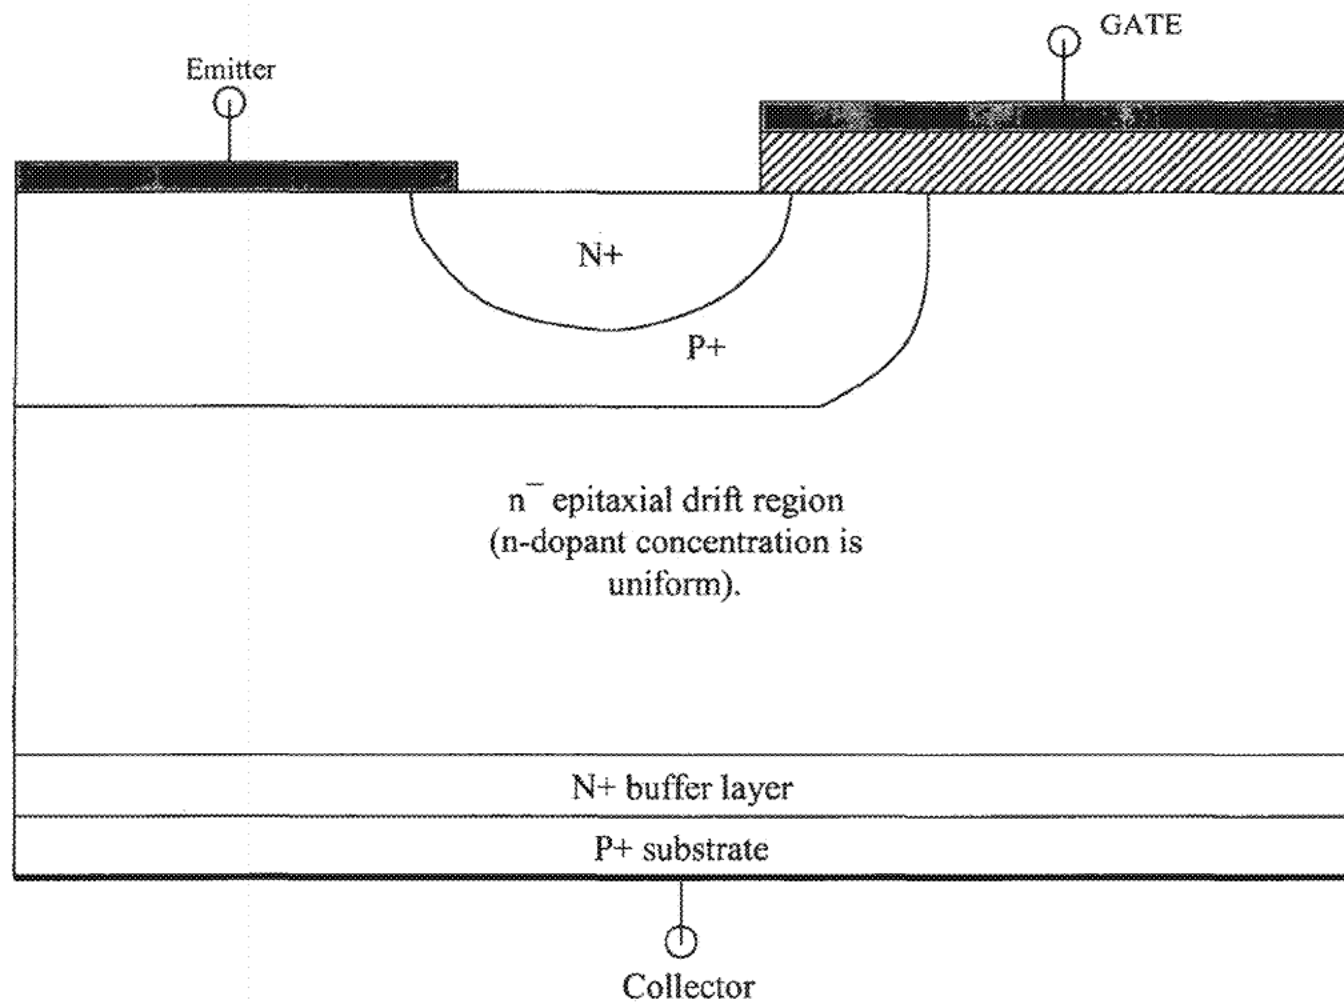


FIGURE 2 Prior art

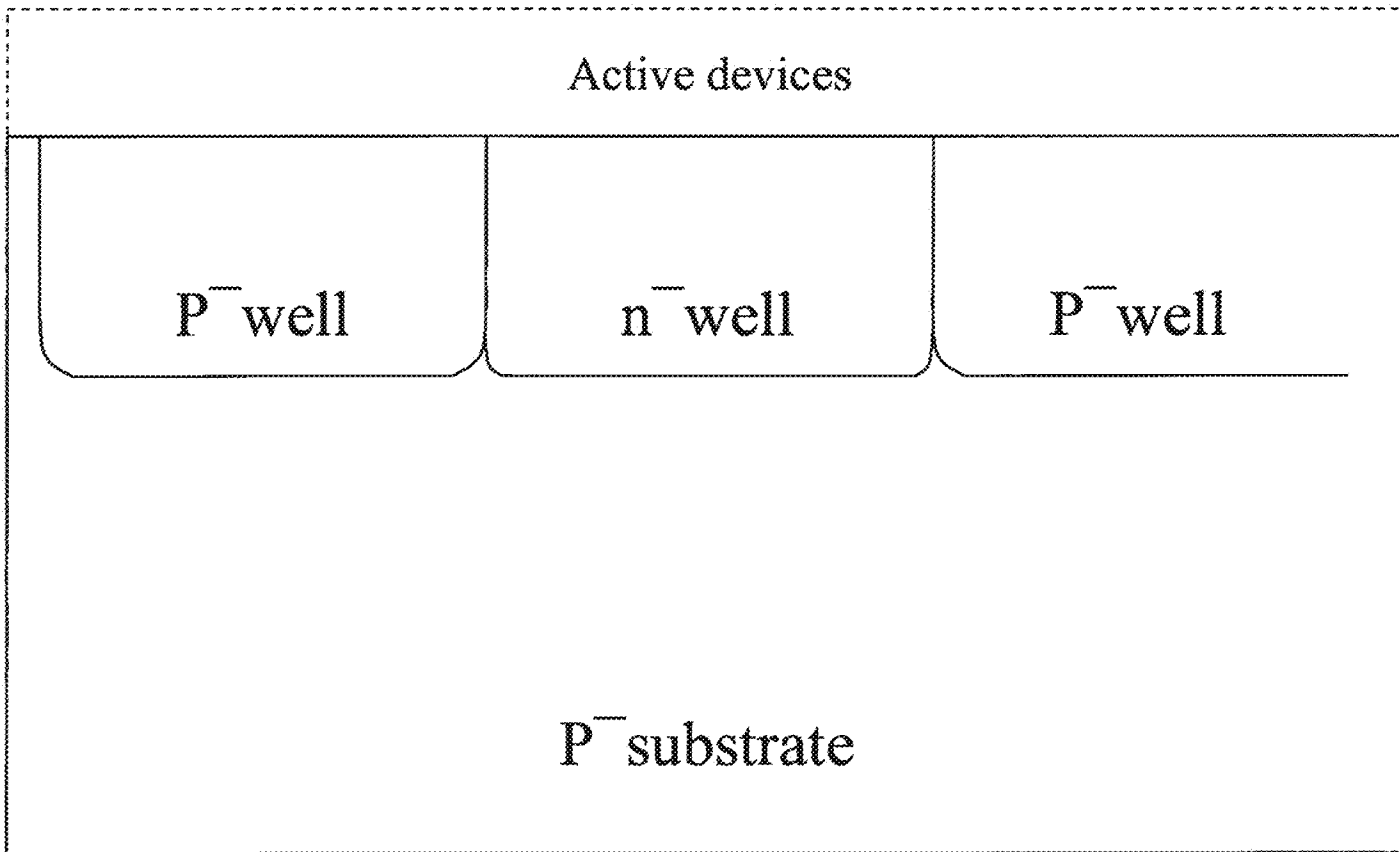


FIGURE 3A Prior art (Twin well CMOS) for a CMOS integrated circuit

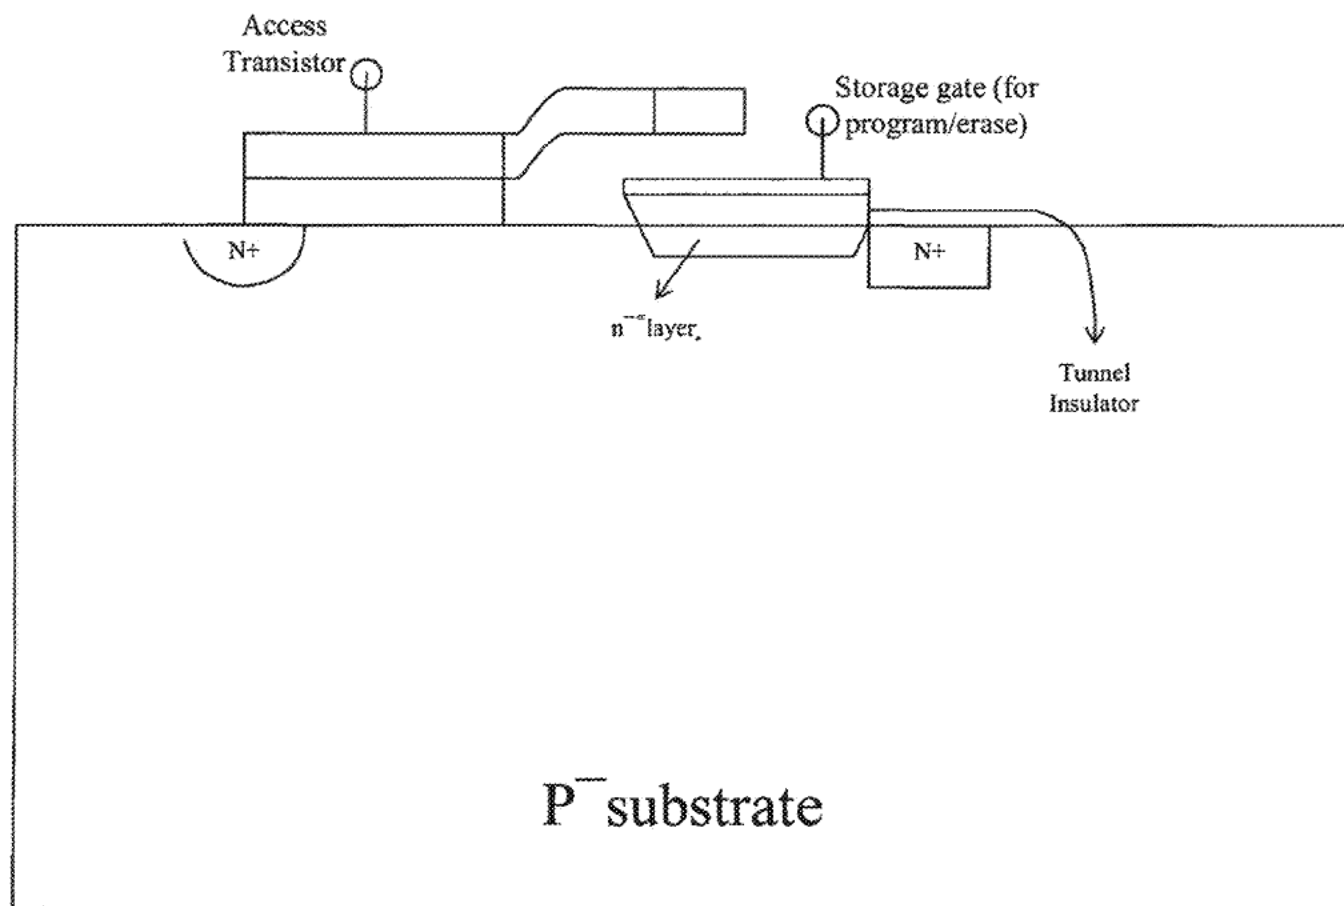


FIGURE 3B Prior art for a two-device EEPROM memory cell

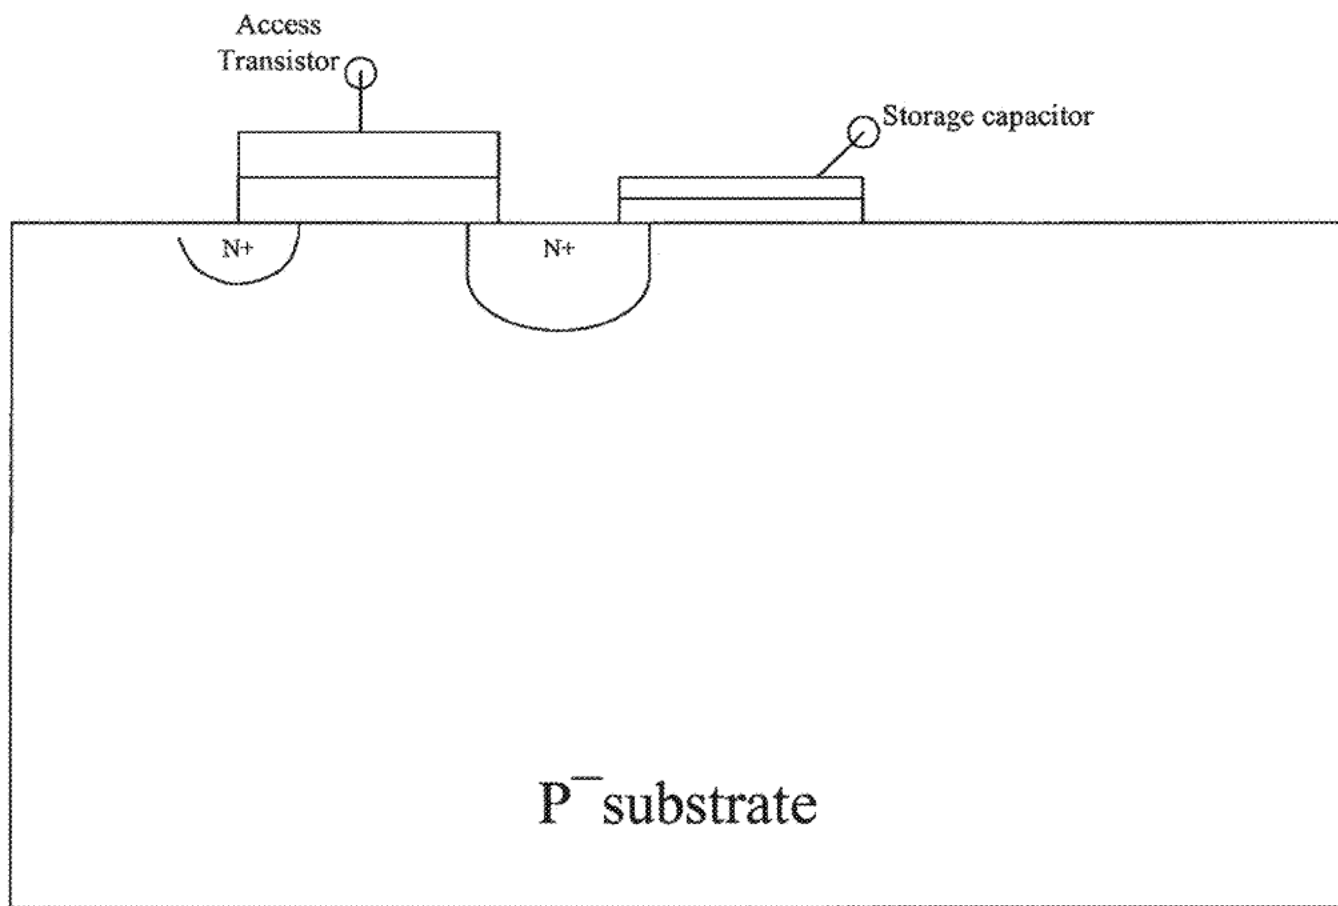


FIGURE 3C Prior art for a 1T-1C DRAM memory cell

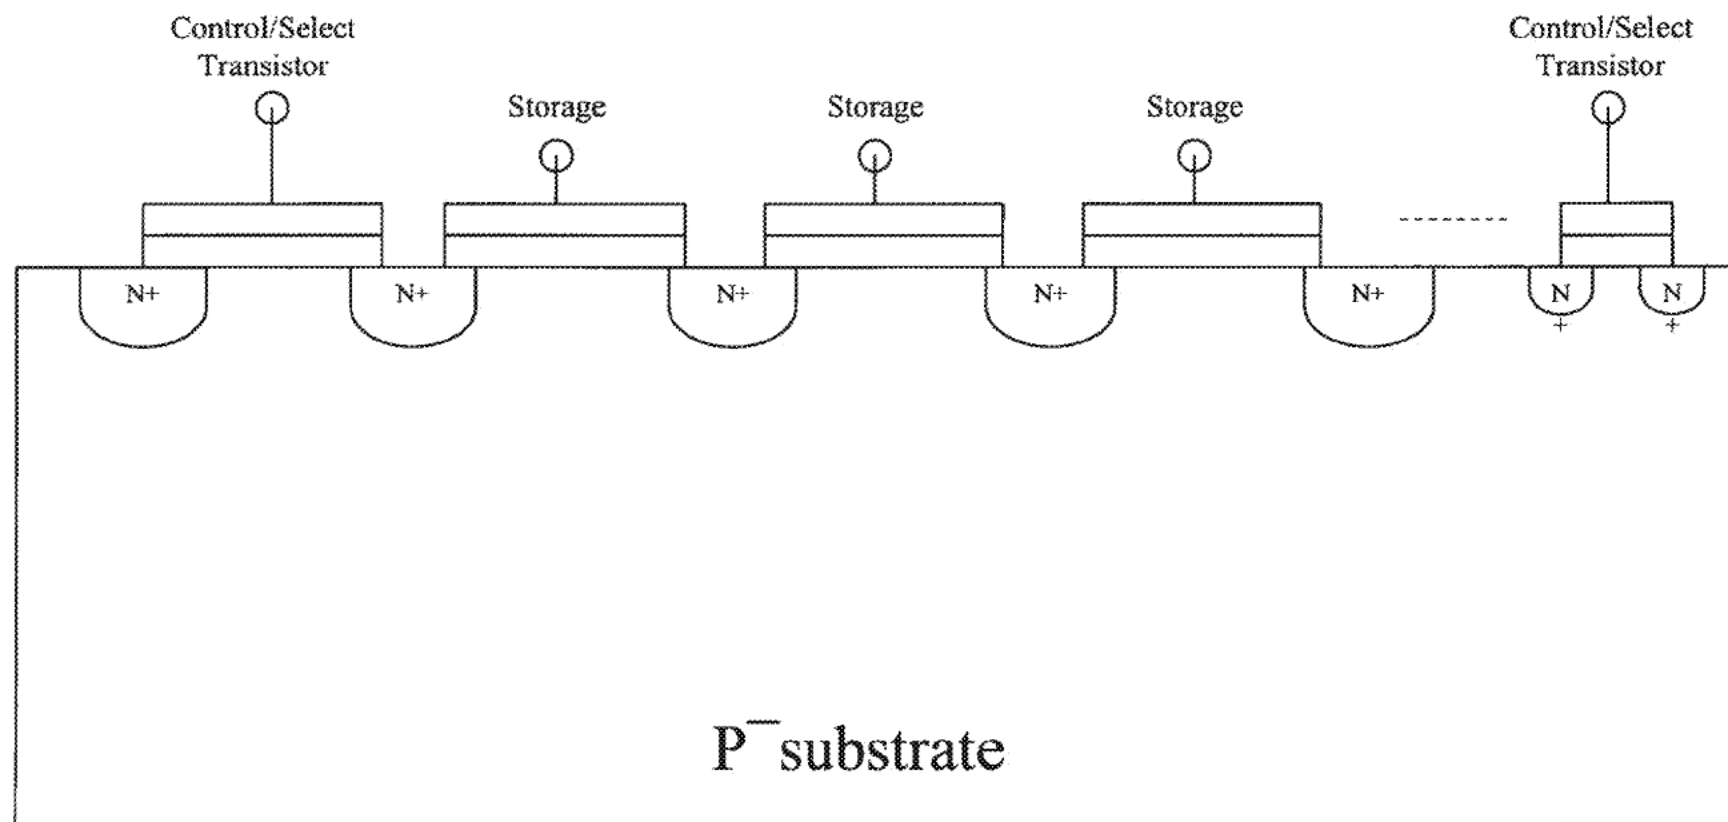


FIGURE 3D Prior art for a NAND flash memory cell

Note: Control/ Sect transistors have a single insulator - traditional MOS transistor.

Storage nodes have a stacked gate structure, typically with a floating gate and control gate comprising the stack.

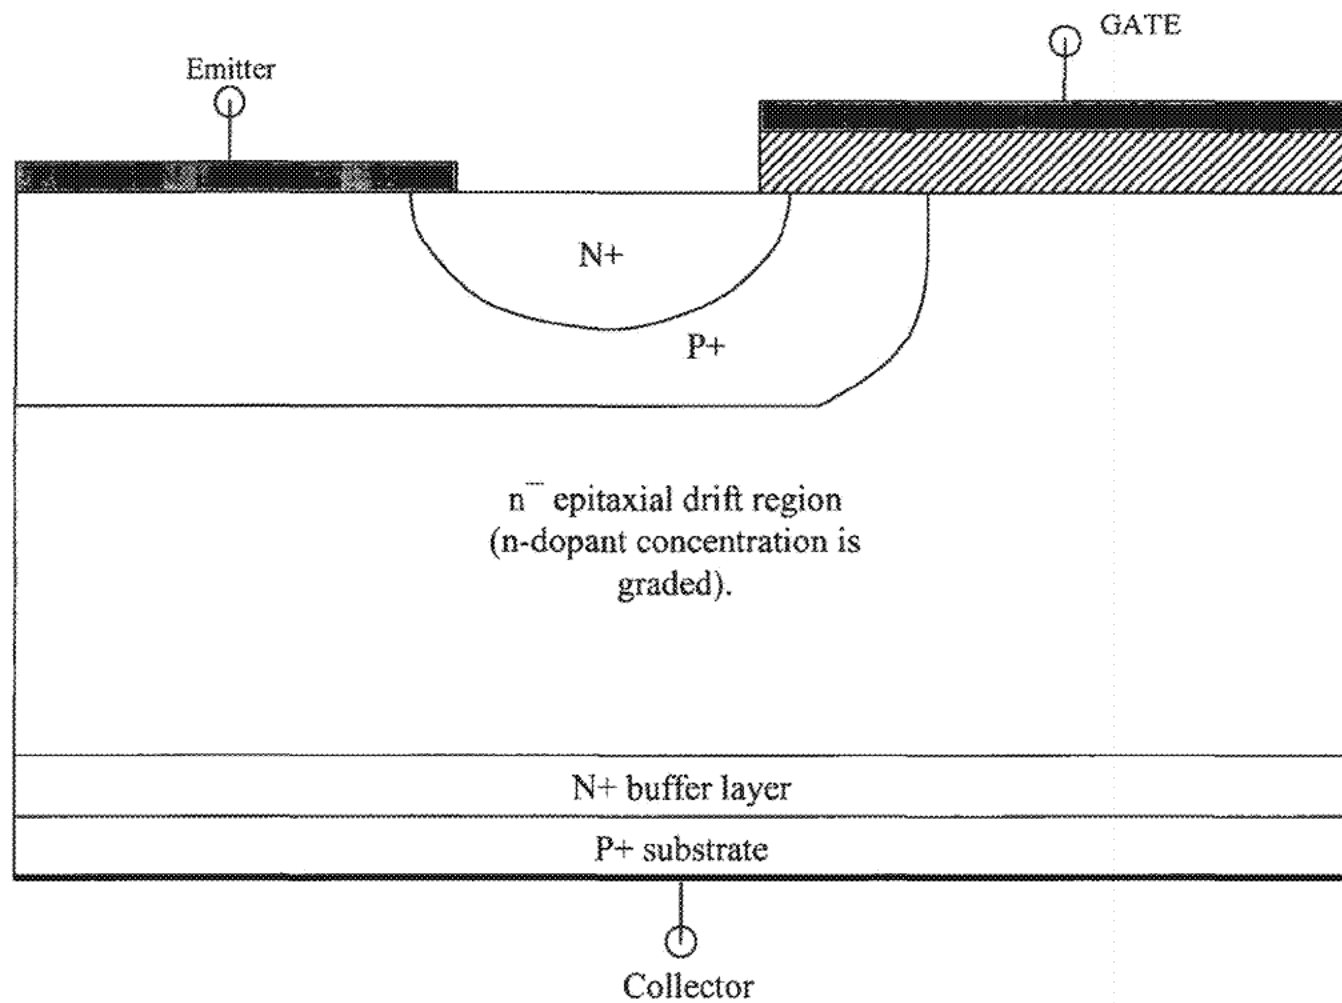


FIGURE 4 A dopant - concentration grinded drift region in a IGBT

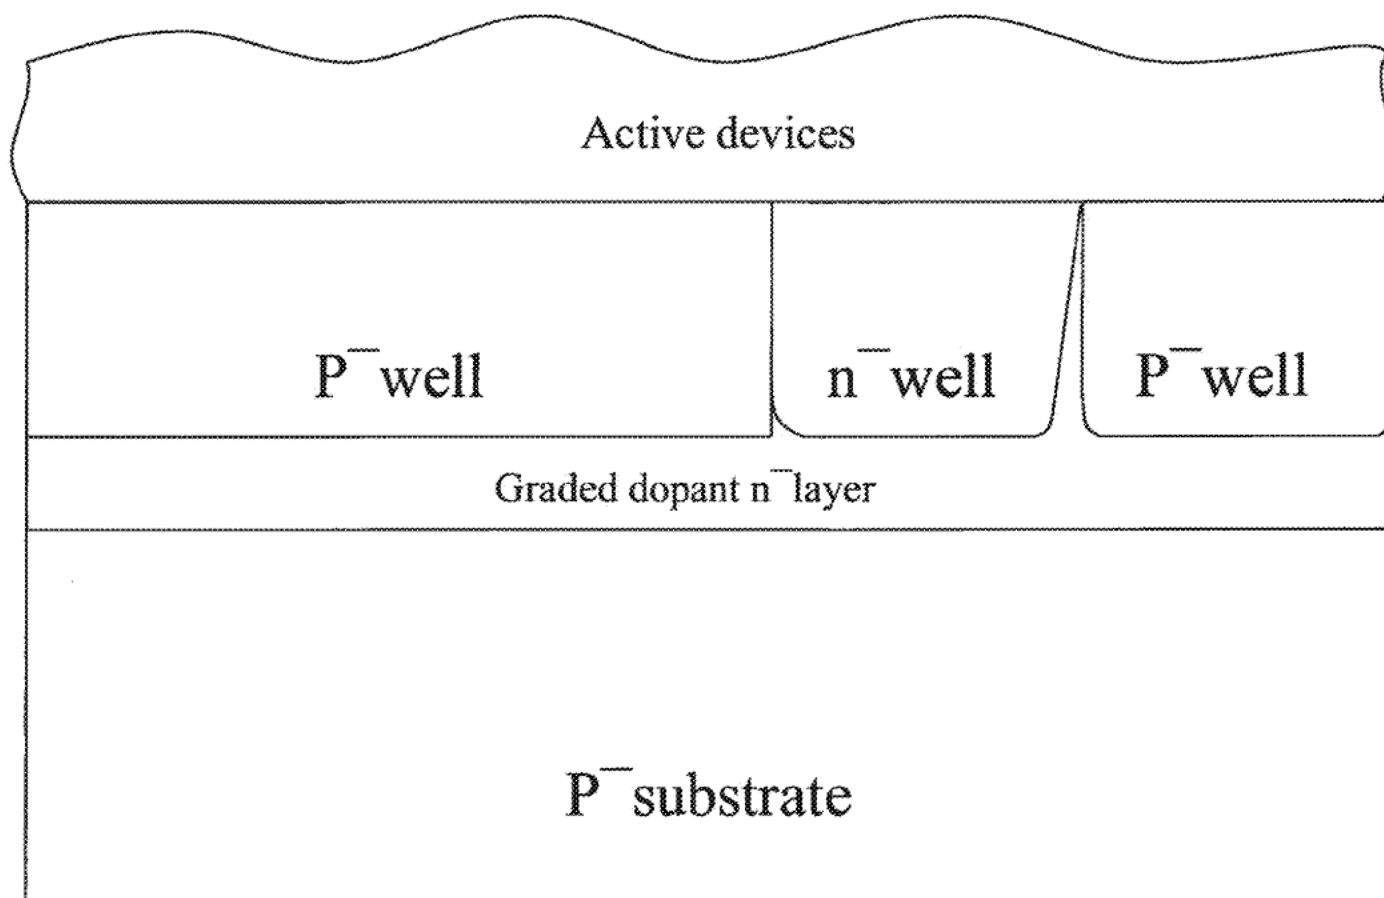


FIGURE 5A A CMOS Substrate for digital, mixed, signal, and sensors IC's

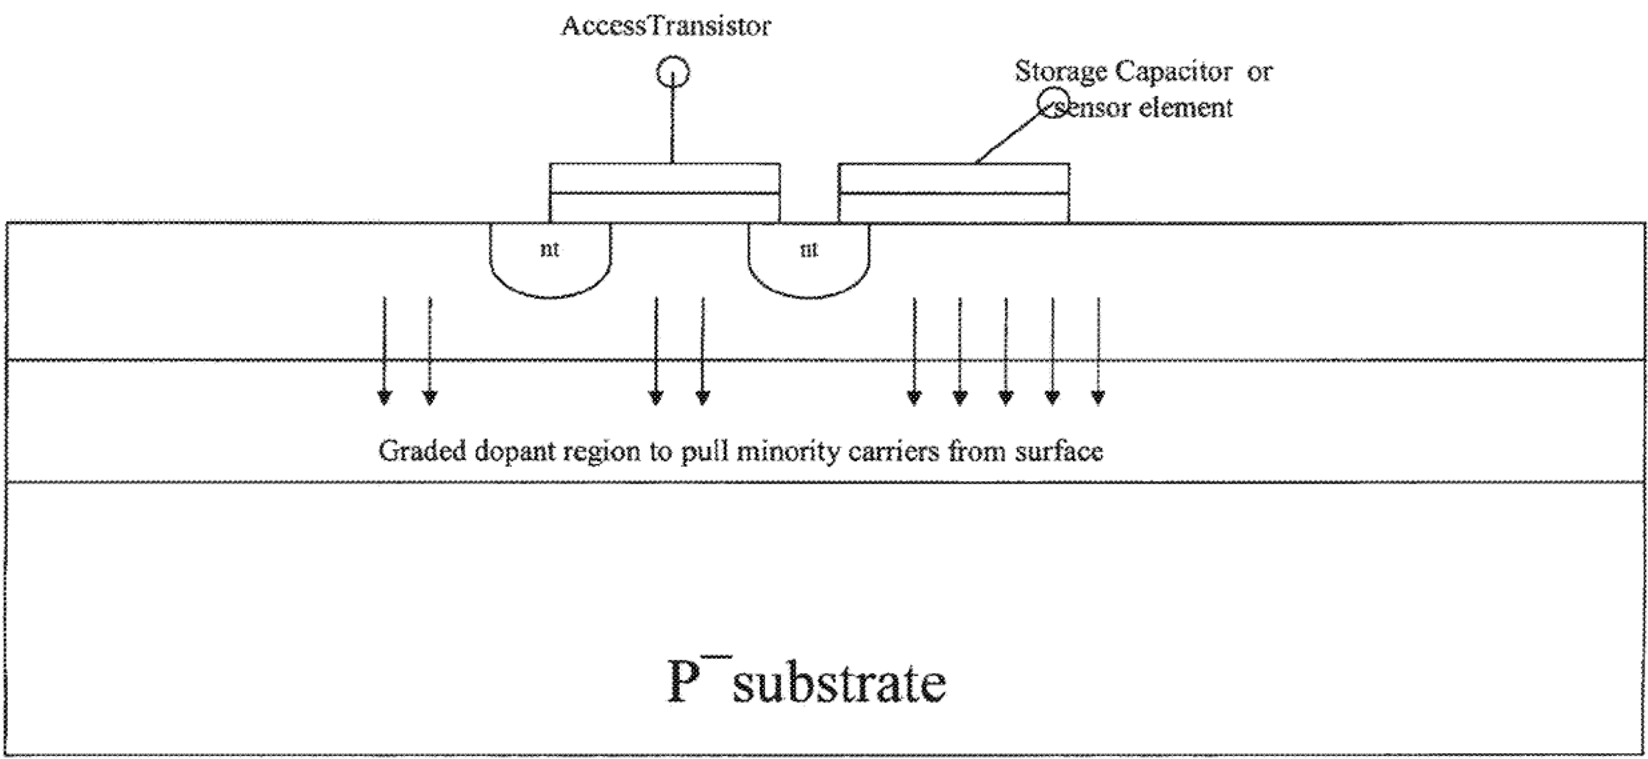


FIGURE 5B CMOS Substrate for a DRAM or image sensor, with one embodiment of the invention

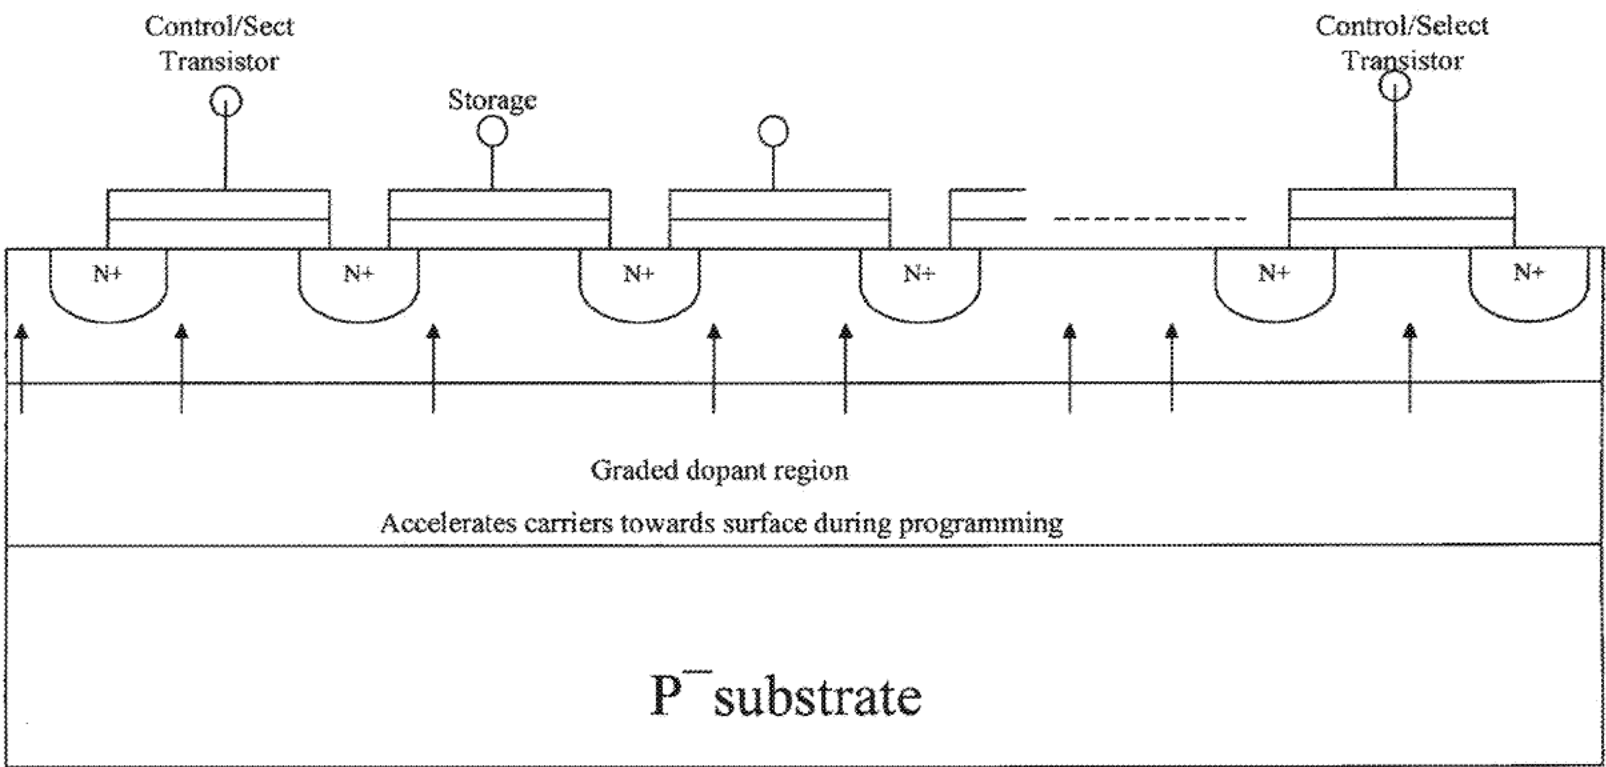


FIGURE 5C CMOS Substrate for a NAND flash device to improve programming times

SEMICONDUCTOR DEVICES WITH GRADED DOPANT REGIONS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a Continuation of U.S. patent application Ser. No. 15/590,282, filed May 9, 2017, published on Aug. 24, 2017, as U.S. Publication No. 2017-0243876, application Ser. No. 15/590,282 is a continuation of U.S. patent application Ser. No. 14/931,636, filed Nov. 3, 2015, published on Jun. 16, 2016 as U.S. Publication No. 2016-0172447, now U.S. Pat. No. 9,647,070, issued on May 9, 2017. Application Ser. No. 14/931,636 is a continuation of U.S. patent application Ser. No. 14/515,584, filed Oct. 16, 2014, published on Feb. 5, 2015, as U.S. Publication No. 2015-0035004, now U.S. Pat. No. 9,190,502, issued on Nov. 17, 2015. Application Ser. No. 14/515,584 is a Continuation of U.S. patent application Ser. No. 13/854,319 filed Apr. 1, 2013, published on Aug. 29, 2013, as U.S. Publication No. 2013-0221488. Application Ser. No. 13/854,319 is a Continuation of Ser. No. 11/622,496, filed Jan. 12, 2007, published on Jul. 12, 2007, as Publication No. 2007-0158790, now U.S. Pat. No. 8,421,195, issued on Apr. 16, 2013. Application Ser. No. 11/622,496, is a Division of U.S. patent application Ser. No. 10/934,915, filed Sep. 3, 2004, published on Mar. 9, 2006, as U.S. Publication No. 2006-0049464. U.S. Pat. Nos. 9,647,070, 9,190,502, and 8,421,195, and Patent Application Publication Nos. 2017-0243876, 2016-0172447, 2015-0035004, 2013-0221488, 2007-0158790, and 2006-0049464, are incorporated herein by reference in their entirety.

TECHNICAL FIELD

This present invention relates to all semiconductor devices and systems. Particularly it applies to diffused diodes, avalanche diodes, Schottky devices, power MOS transistors, JFET's, RF bipolar transistors, IGBTs (Insulated Gate Bipolar Transistors), varactors, digital VLSI, mixed signal circuits and sensor devices including camera ICs employing CCD (Charge Coupled Device) as well as CMOS technologies.

BACKGROUND

Bipolar Junction Transistors (BJT) are classified as minority carrier devices because minority carriers are the principle device conduction mechanism. However, majority carriers also play a small but finite role in modulating the conductivity in BJTs. Consequently, both carriers (electrons and holes) play a role in the switching performance of BJTs. The maximum frequency of operation in BJTs is limited by the base transit time as well as the quick recombination of the majority carriers when the device is switched off (prior to beginning the next cycle). The dominant carrier mechanism in BJTs is carrier diffusion. The carrier drift current component is fairly small, especially in uniformly doped base BJTs. Efforts have been made in graded base transistors to create an aiding drift field to enhance the diffusing minority carrier's speed from emitter to collector. However, most semiconductor devices, including various power MOSFETs (traditional, DMOS, lateral, vertical and a host of other configurations), IGBT's (Insulated Gated Base Transistors), still use a uniformly doped 'drift epitaxial' region in the base. FIG. 1 shows the relative doping concentration versus distance in a BJT. FIG. 2 shows the uniformly doped epi

region in an IGBT. In contrast to BJTs, MOS devices are majority carrier devices for conduction. The conduction is channel dominated. The channel can be a surface in one plane in planar devices. The surface can also be on the sidewalls in a vertical device. Other device architectures to combine planar and vertical conduction are also possible. The maximum frequency of operation is dictated primarily by source-drain separation distance. Most MOS devices use a uniformly doped substrate (or a well region). When a MOSFET is optimally integrated with a BJT in a monolithic fashion, an IGBT results. The IGBT inherits the advantages of both MOSFET and BJT. It also brings new challenges because the required characteristics (electron transit and hole recombination as fast as possible in n-channel IGBT) necessitate different dopant gradients either in the same layer at different positions, or at the interfaces of similar or dissimilar layers.

Retrograde wells have been attempted, with little success, to help improve soft error immunity in SRAMs and visual quality in imaging circuits. FIG. 3A shows a typical CMOS VLSI device employing a twin well substrate, on which active devices are subsequently fabricated. FIGS. 3B, 3C, and 3D illustrate device cross sections, as practiced today. Retrograde and halo wells have also been attempted to improve refresh time in DRAMs (dynamic random-access memories), as well as, reducing dark current (background noise) and enhance RGB (Red, Green, Blue) color resolution in digital camera ICs. Most of these techniques either divert the minority carriers away from the active regions of critical charge storage nodes at the surface, or, increase minority carrier density locally as the particular application requires.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIG. 1 illustrates the relative doping profiles of emitter, base and collector for the two most popular bipolar junction transistors: namely, uniform base ("A") and graded base ("B");

FIG. 2 illustrates the cross section of a commercial IGBT with a uniform epitaxial drift region (base);

FIGS. 3A, 3B, 3C, and 3D illustrate cross sections of commonly used prior art CMOS silicon substrates; FIG. 3A showing a typical prior art IC with two wells (one n⁻ well in which p-channel transistors are subsequently fabricated and one p⁻ well in which n-channel transistors are subsequently fabricated); FIG. 3B showing a prior art EEPROM (Electrically Erasable Programmable Read-Only Memory) memory cell having a tunnel insulator; FIG. 3C showing a prior art DRAM memory cell; and FIG. 3D showing a prior art NAND flash memory cell;

FIG. 4 illustrates the cross section of an IGBT, using one embodiment of the invention described here, where the dopant is optimally graded in the epitaxial drift region; and

FIGS. 5A, 5B, and 5C illustrate the cross sections of a CMOS silicon substrate with two wells and an underlying layer using embodiments of the invention to improve performance in each application—VLSI logic, DRAM/image IC, nonvolatile memory IC.

DETAILED DESCRIPTION

The relative doping concentrations of emitter and collector regions varies from 10¹⁸ to 10²⁰/cm³, whereas the base

3

region is 10^{14} to $10^{16}/\text{cm}^3$ depending on the desired characteristics of the BJT. In graded base p-n-p transistors, the donor dopant concentration may be 10 to 100× at the emitter-base junction, relative to the base-collector junction (1×). The gradient can be linear, quasi linear, exponential or complimentary error function. The relative slope of the donor concentration throughout the base creates a suitable aiding drift electric field, to help the holes (p-n-p transistor) transverse from emitter to collector. Since the aiding drift electric field helps hole conduction, the current gain at a given frequency is enhanced, relative to a uniformly-doped (base) BJT. The improvement in cut-off frequency (or, frequency at unity gain, f_T) can be as large as 2×-5×. Similar performance improvements are also applicable to n-p-n transistors.

As illustrated in FIG. 4, in one embodiment according to the invention, a donor gradient is established from the emitter-drift epitaxial base region junction of the punch-through IGBT, to the drift epitaxial base region— n^+ buffer layer boundary (electrons in this case are accelerated in their transit from emitter to collector). The “average” base resistance is optimized so that conductivity modulation and lifetime (for minority carriers) in the base region are not compromised. By sweeping the carriers towards the n^+ buffer region a number of advantages are obtained. First, the frequency of operation (combination of t_{on} and t_{off} as is known in the IGBT commercial nomenclature) can be enhanced. Second, and maybe more importantly, during t_{off} holes can be recombined much quicker at the n^+ buffer layer, compared to the uniformly doped n^- epitaxial drift region by establishing a different dopant gradient near the n^+ buffer layer. It should be noted that the drift region can also be a non-epitaxial silicon substrate. Although epitaxy enhances lifetime, it is not mandatory. Different layers of dopant regions can be transferred through wafer to wafer bonding (or other similar transfer mechanisms) for eventual device fabrication. The “reverse recovery time” for an IGBT is significantly improved due to the optimized graded dopant in the so called “drift region” as well as at the interfaces of the drift region. Graded dopants can also be implemented in the n^+ buffer layer as well as other regions adjacent to the respective layers. Two important performance enhancements are the result of dopant gradients. For example, in an n-channel IGBT, electrons can be swept from source to drain rapidly, while at the same time holes can be recombined closer to the n^+ buffer layer. This can improve t_{on} and t_{off} in the same device.

As illustrated in FIGS. 5A, 5B, and 5C, donor gradient is also of benefit to very large scale integrated circuits (VLSI)—VLSI logic, DRAM, nonvolatile memory like NAND flash. Spurious minority carriers can be generated by clock switching in digital VLSI logic and memory ICs. These unwanted carriers can discharge dynamically-held “actively held high” nodes. In most cases, statically-held nodes (with V_{cc}) cannot be affected. Degradation of refresh time in DRAMs is one of the results, because the capacitor holds charge dynamically. Similarly, degradation of CMOS digital images in digital imaging ICs is another result of the havoc caused by minority carriers. Pixel and color resolution can be significantly enhanced in imaging ICs with the embodiments described herein. Creating “subterranean” recombination centers underneath the wells (gold doping, platinum doping) as is done in some high-voltage diodes is not practical for VLSI circuits. Hence, a novel technique is described herein which creates a drift field to sweep these unwanted minority carriers from the active circuitry at the surface into the substrate in a monolithic die as quickly as

4

possible. In a preferred embodiment, the subterranean n^- layer has a graded donor concentration to sweep the minority carriers deep into the substrate. One or more of such layers can also be implemented through wafer to wafer bonding or similar “transfer” mechanisms. This n^- layer can be a deeply-implanted layer. It can also be an epitaxial layer. As desired, the n^- well and p^- wells can also be graded or retrograded in dopants to sweep those carriers away from the surface as well. The graded dopant can also be implemented in surface channel MOS devices to accelerate majority carriers towards the drain. To decrease programming time in nonvolatile memory devices, carriers should be accelerated towards the surface when programming of memory cells is executed. The graded dopant can also be used to fabricate superior Junction Field-Effect transistors where the “channel pinch-off” is controlled by a graded channel instead of a uniformly doped channel (as practiced in the prior art).

One of ordinary skill and familiarity in the art will recognize that the concepts taught herein can be customized and tailored to a particular application in many advantageous ways. For instance, minority carriers can be channeled to the surface to aid programming in nonvolatile memory devices (NOR, NAND, multivalued-cell). Moreover, single-well, and triple-well CMOS fabrication techniques can also be optimized to incorporate these embodiments individually and collectively. Any modifications of such embodiments (described here) fall within the spirit and scope of the invention. Hence, they fall within the scope of the claims described below.

Although the invention has been described with reference to specific embodiments, these descriptions are not meant to be construed in a limiting sense. Various modifications of the disclosed embodiments, as well as alternative embodiments of the invention will become apparent to persons skilled in the art upon reference to the description of the invention. It should be appreciated by those skilled in the art that the conception and the specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.

It is therefore, contemplated that the claims will cover any such modifications or embodiments that fall within the true scope of the invention.

What is claimed is:

1. A semiconductor device, comprising:

- a substrate of a first doping type at a first doping level having first and second surfaces;
- a first active region disposed adjacent the first surface of the substrate with a second doping type opposite in conductivity to the first doping type and within which transistors can be formed;
- a second active region separate from the first active region disposed adjacent to the first active region and within which transistors can be formed;
- transistors formed in at least one of the first active region or second active region;
- at least a portion of at least one of the first and second active regions having at least one graded dopant concentration to aid carrier movement from the first surface to the second surface of the substrate; and
- at least one well region adjacent to the first or second active region containing at least one graded dopant

5

region, the graded dopant region to aid carrier movement from the first surface to the second surface of the substrate.

2. The semiconductor device of claim 1, wherein the substrate is a p-type substrate.

3. The semiconductor device of claim 1, wherein the substrate has epitaxial silicon on top of a nonepitaxial substrate.

4. The semiconductor device of claim 1, wherein the first active region and second active region contain one of either p-channel and n-channel devices.

5. The semiconductor device of claim 1, wherein the first active region and second active region contain either p-channel or n-channel devices in n-wells or p-wells, respectively, and each well has at least one graded dopant.

6. The semiconductor device of claim 1, wherein the first active region and second active region are each separated by at least one isolation region.

7. The semiconductor device of claim 1, wherein the graded dopant is fabricated with an ion implantation process.

8. The semiconductor device of claim 1, wherein the first and second active regions are formed adjacent the first surface of the substrate.

9. The semiconductor device of claim 1, wherein dopants of the graded dopant concentration in the first active region or the second active region are either p-type or n-type.

10. The semiconductor device of claim 1, wherein dopants of the graded dopant concentration in the first active region are both p-type and n-type.

11. The semiconductor device of claim 1, wherein dopants of the graded dopant concentration in the second active region are both p-type and n-type.

12. The semiconductor device of claim 1, wherein dopants of the graded dopant region in the well region are both p-type and n-type.

13. The semiconductor device of claim 1, wherein the transistors which can be formed in the first and second active regions are CMOS transistors requiring at least a source, a drain, a gate and a channel.

14. The semiconductor device of claim 1, wherein the device is a dynamic random access memory (DRAM).

15. The semiconductor device of claim 1, wherein the device is a complementary metal oxide semiconductor (CMOS) with a nonepitaxial substrate.

16. The semiconductor device of claim 1, wherein the device is a flash memory.

17. The semiconductor device of claim 1, wherein the device is a logic device.

18. The semiconductor device of claim 17, wherein the device is central processing unit.

19. The semiconductor device of claim 1, wherein the device is an image sensor.

20. A semiconductor device, comprising:

a substrate of a first doping type at a first doping level having first and second surfaces;

a first active region disposed adjacent the first surface of the substrate with a second doping type opposite in conductivity to the first doping type and within which transistors can be formed in the surface thereof;

6

a second active region separate from the first active region disposed adjacent to the first active region and within which transistors can be formed in the surface thereof; transistors formed in at least one of the first active region or second active region;

at least a portion of at least one of the first and second active regions having at least one graded dopant concentration to aid carrier movement from the surface to the substrate; and

at least one well region adjacent to the first or second active region containing at least one graded dopant region, the graded dopant region to aid carrier movement from the first surface to the second surface of the substrate.

21. The semiconductor device of claim 20, wherein the substrate is an n-type substrate.

22. The semiconductor device of claim 20, wherein the substrate is a p-type substrate.

23. The semiconductor device of claim 20, wherein the substrate has epitaxial silicon on top of a nonepitaxial substrate.

24. The semiconductor device of claim 20, wherein the first active region and second active region contain at least one of either p-channel and n-channel devices.

25. The semiconductor device of claim 20, wherein the first active region and second active region contain either p-channel or n-channel devices in n-wells or p-wells, respectively, and each well has at least one graded dopant.

26. The semiconductor device of claim 20, wherein the first active region and second active region are each separated by at least one isolation region.

27. The semiconductor device of claim 20, wherein dopants of the graded dopant concentration in the first active region or the second active region are either p-type or n-type.

28. The semiconductor device of claim 20, wherein dopants of the graded dopant concentration in the first active region are both p-type and n-type.

29. The semiconductor device of claim 20, wherein dopants of the graded dopant concentration in the second active region are both p-type and n-type.

30. The semiconductor device of claim 20, wherein dopants of the graded dopant region in the well region are both p-type and n-type.

31. The semiconductor device of claim 20, wherein the graded dopant is fabricated with an ion implantation process.

32. The semiconductor device of claim 20, wherein the substrate is a complementary metal oxide semiconductor (CMOS) device.

33. The semiconductor device of claim 20, wherein the device is a flash memory.

34. The semiconductor device of claim 20, wherein the device is a logic device.

35. The semiconductor device of claim 34, wherein the device is central processing unit.

36. The semiconductor device of claim 20, wherein the device is an image sensor.

* * * * *