



US007875948B2

(12) **United States Patent**
Hynecek et al.

(10) **Patent No.:** **US 7,875,948 B2**
(45) **Date of Patent:** **Jan. 25, 2011**

(54) **BACKSIDE ILLUMINATED IMAGE SENSOR**

(76) Inventors: **Jaroslav Hynecek**, 5285 Meadows Rd., Lake Oswego, OR (US) 97035; **Leonard Forbes**, 5285 Meadows Rd., Lake Oswego, OR (US) 97035; **Homayoon Haddad**, 5285 Meadows Rd., Lake Oswego, OR (US) 97035; **Thomas Joy**, 787 N. Mary Ave., Sunnyvale, CA (US) 94085

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 58 days.

(21) Appl. No.: **12/255,194**

(22) Filed: **Oct. 21, 2008**

(65) **Prior Publication Data**

US 2010/0096718 A1 Apr. 22, 2010

(51) **Int. Cl.**

H01L 31/02 (2006.01)

(52) **U.S. Cl.** **257/447; 257/460; 257/E31.126**

(58) **Field of Classification Search** **257/228, 257/447, 460, E31.12, E31.126**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,708,766	A	11/1987	Hynecek	
4,750,980	A	6/1988	Hynecek	
5,292,682	A	3/1994	Stevens et al.	
5,365,092	A	11/1994	Janesick	
5,688,715	A	11/1997	Sexton et al.	
5,814,810	A	9/1998	Anagnostopoulos	
5,825,840	A	10/1998	Anagnostopoulos	
5,891,752	A	4/1999	Losee	
6,587,146	B1	7/2003	Guidash	
6,809,008	B1	10/2004	Holm et al.	
7,498,650	B2 *	3/2009	Lauxtermann	257/460
7,588,993	B2 *	9/2009	Liu et al.	438/401
2005/0118354	A1	6/2005	Ahn et al.	

2005/0255625	A1 *	11/2005	Janesick et al.	438/57
2006/0006488	A1 *	1/2006	Kanbe	257/443
2006/0043437	A1	3/2006	Mouli	
2006/0076590	A1 *	4/2006	Pain et al.	257/294
2006/0125038	A1 *	6/2006	Mabuchi	257/447
2006/0187327	A1	8/2006	Mabuchi et al.	
2007/0012969	A1	1/2007	Mouli	
2007/0117254	A1	5/2007	Pain	
2007/0207566	A1	9/2007	Fu et al.	
2007/0210395	A1	9/2007	Maruyama et al.	
2007/0234949	A1	10/2007	Ahn et al.	
2008/0001179	A1	1/2008	Roy	
2008/0188021	A1 *	8/2008	Tsai et al.	438/29
2008/0308890	A1 *	12/2008	Uya	257/437
2009/0201395	A1 *	8/2009	Manabe et al.	348/294

FOREIGN PATENT DOCUMENTS

WO 2005/046207 5/2005

OTHER PUBLICATIONS

Mark Clampin, V-Optical CCD's, http://www.stsci.edu/stsci/meetings/space_detectors/clampin.htm.

(Continued)

Primary Examiner—Evan Pert


Assistant Examiner—W. Wendy Kuo

(74) *Attorney, Agent, or Firm*—McAndrews, Held & Malloy, Ltd.

(57) **ABSTRACT**

A backside illuminated image sensor includes a substrate, a backside passivation layer disposed on backside of the substrate, and a transparent conductive layer disposed on the backside passivation layer.

31 Claims, 12 Drawing Sheets

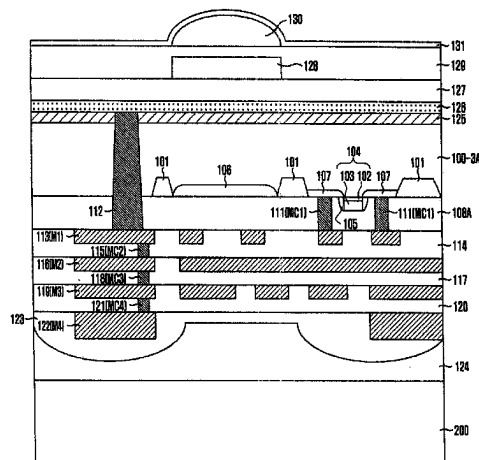

Sony Exhibit 1009
Sony v. VisionX

OTHER PUBLICATIONS

G. Agostinelli et al., "Very Low Surface Recombination Velocities on p-type Silicon Wafers Passivated with a Dielectric with Fixed Negative Charge", Solar Energy Materials and Solar Cells, vol. 90, pp. 3438-3443 (2006).

Michael E. Hoenk et al., "Growth of a Delta-Doped Silicon Layer by Molecular Beam Epitaxy on a Charge-Coupled Device for Reflection-Limited Ultraviolet Quantum Efficiency", Appl. Phys. Lett., vol. 61, No. 9, pp. 1084-1086 (1992).

Shouleh Nikzad et al., "Delta-Doped CCD's for Enhanced UV Performance", SPIE, vol. 2278, pp. 138-146 (1994).

M.P. Lesser, "Improving CCD Quantum Efficiency", SPIE, vol. 2198, pp. 782-791 (1994).

Michael Lesser et al., "Enhancing Back Illuminated Performance of Astronomical CCD's", SPIE, vol. 3355, pp. 446-456 (1998).

International Search Report and Written Opinion for International Patent Application No. PCT/US2009/061488 mailed Feb. 11, 2010.

* cited by examiner

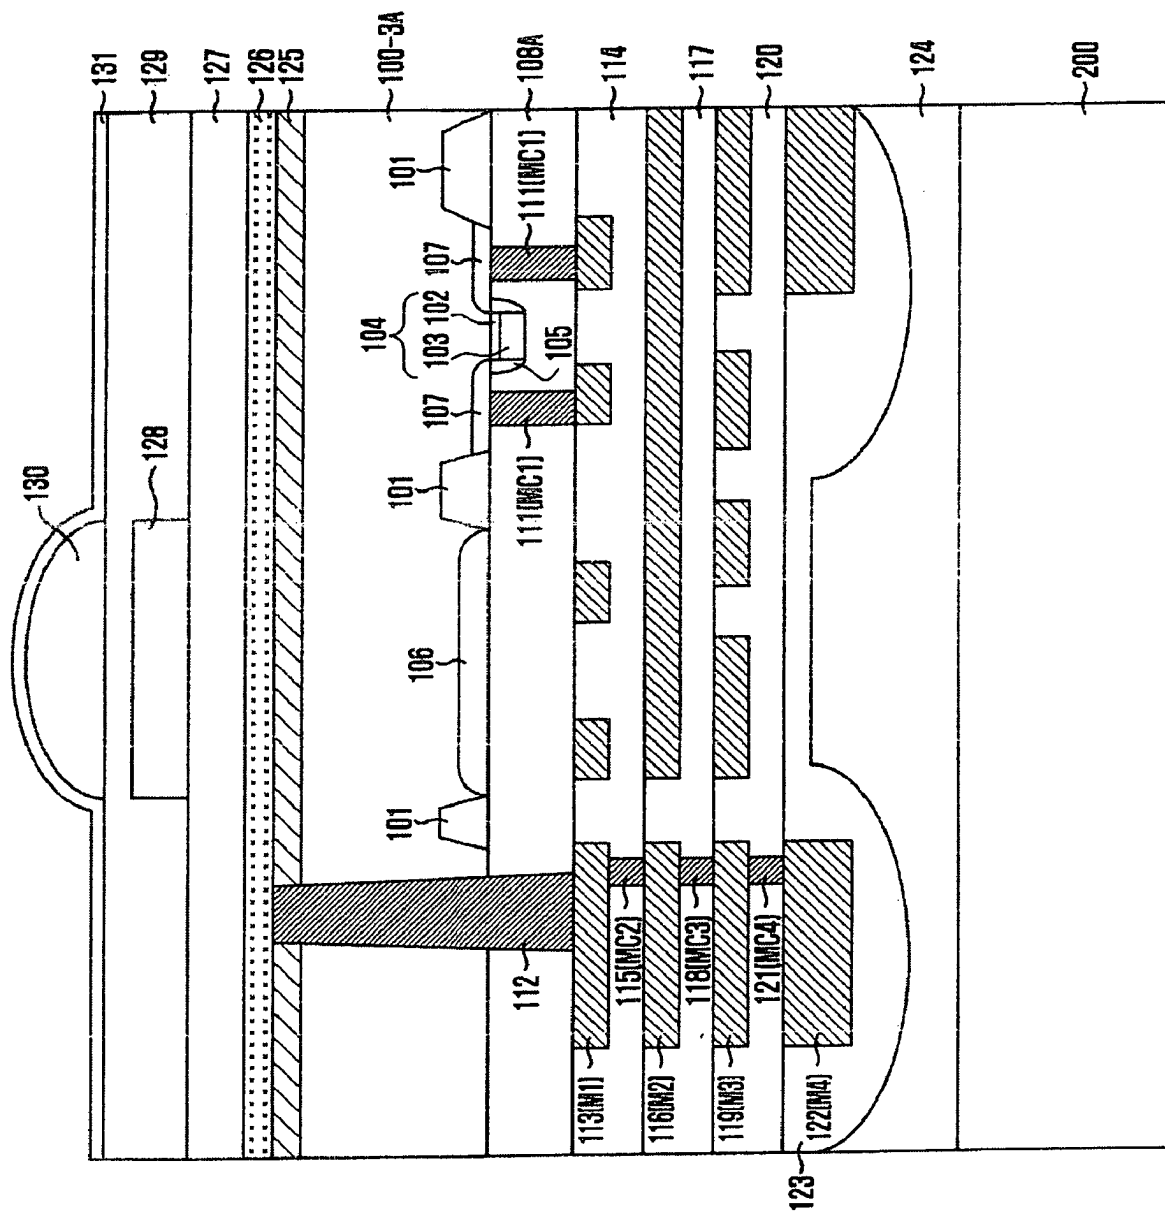


FIG. 1

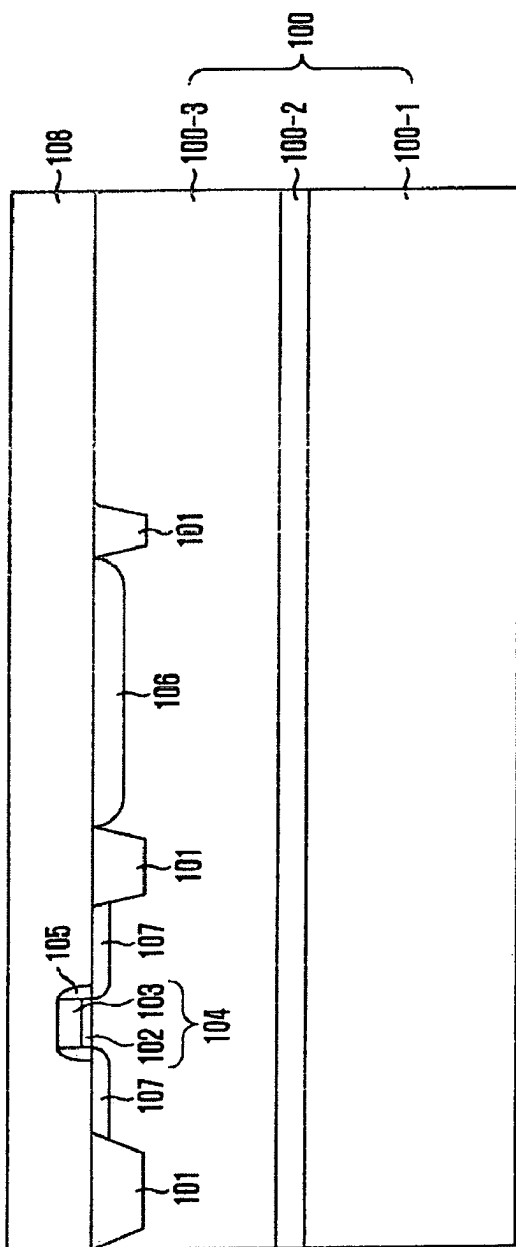


FIG. 2A

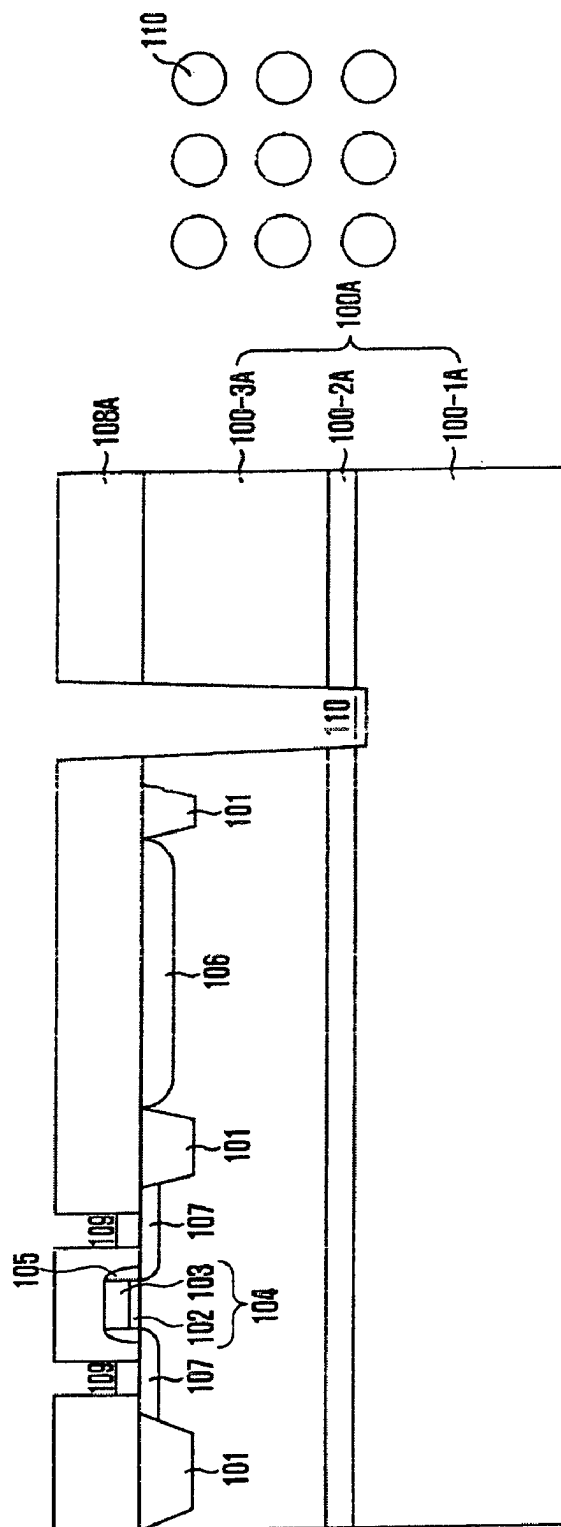


FIG. 2B

FIG. 2C

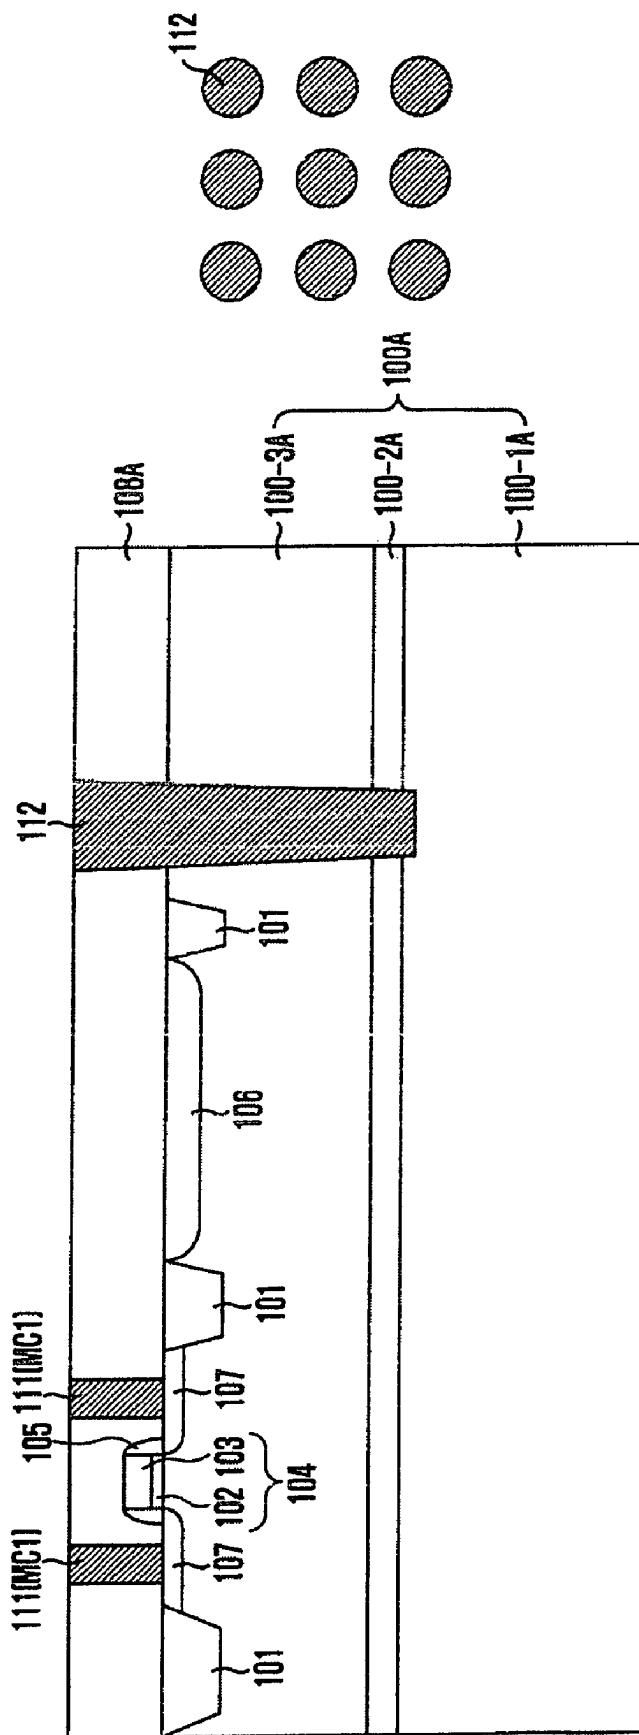


FIG. 2D

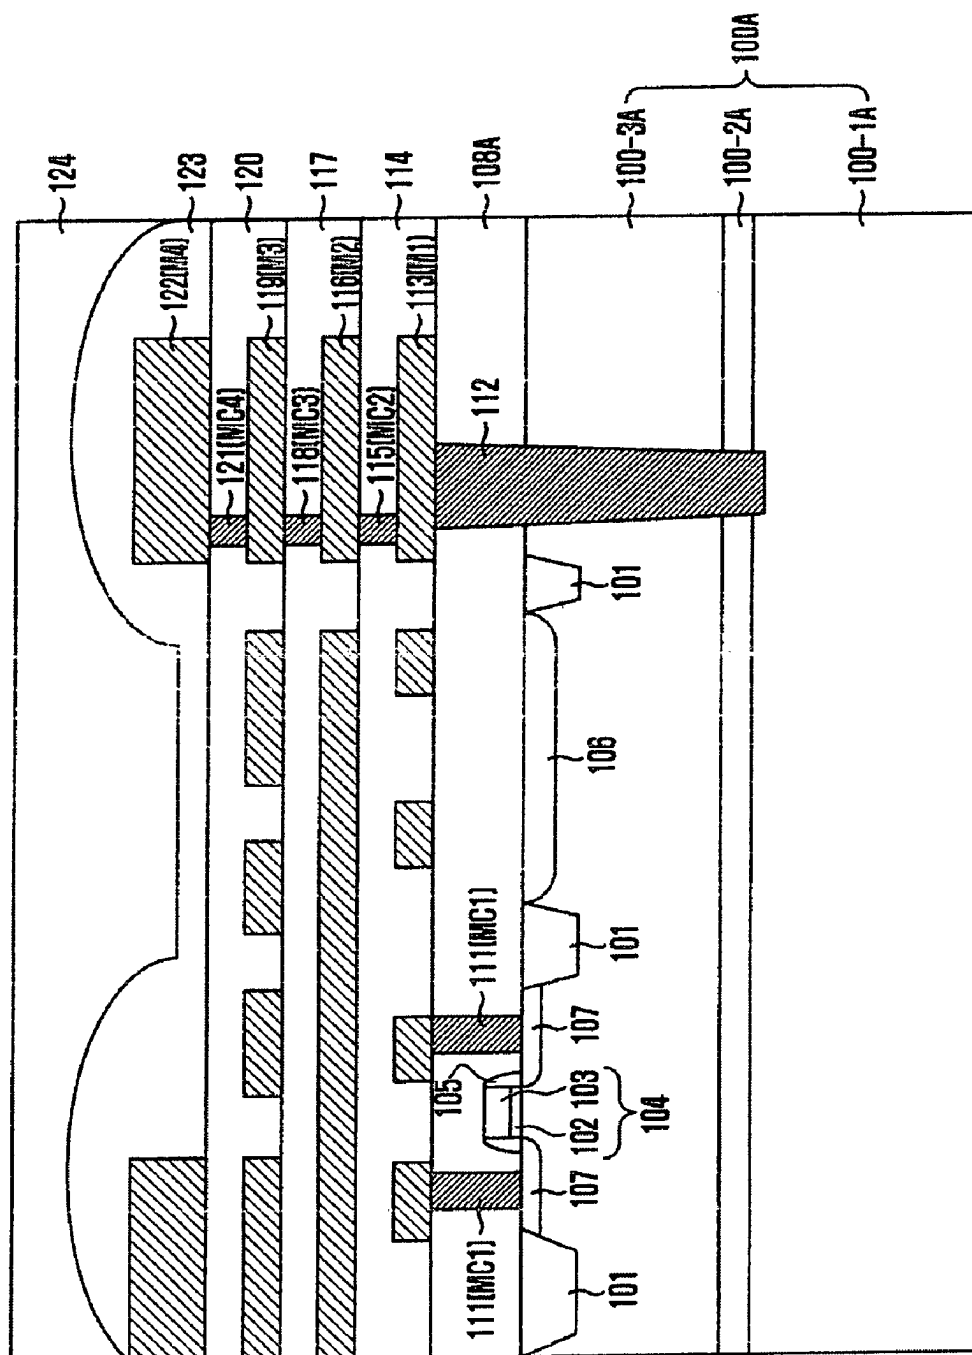


FIG. 2E

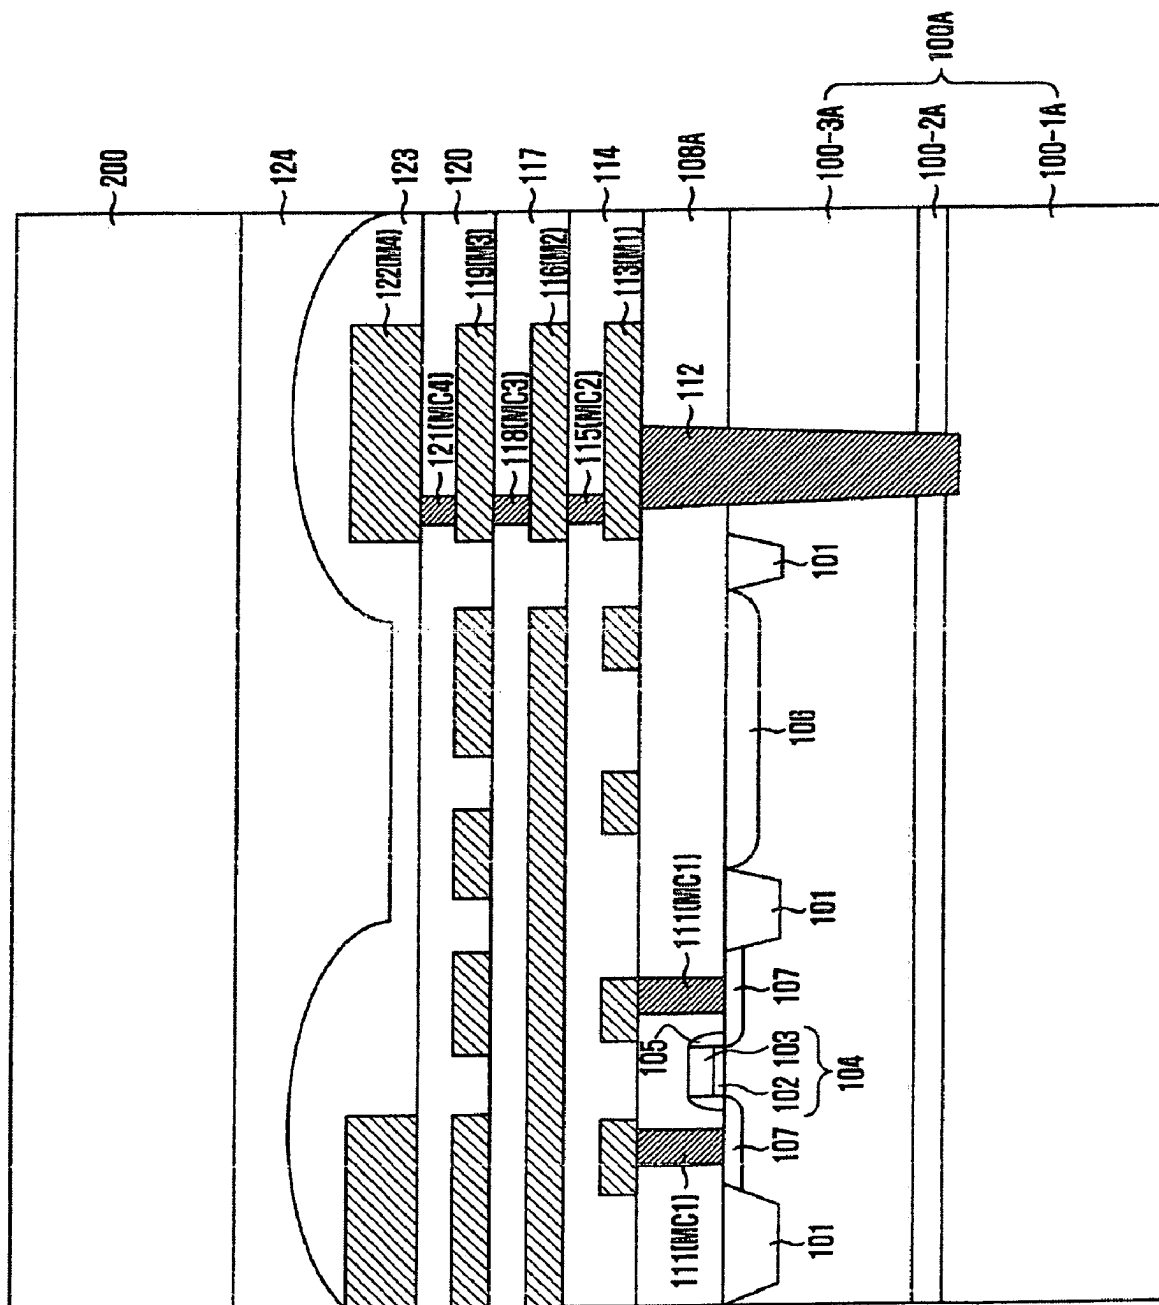


FIG. 2F


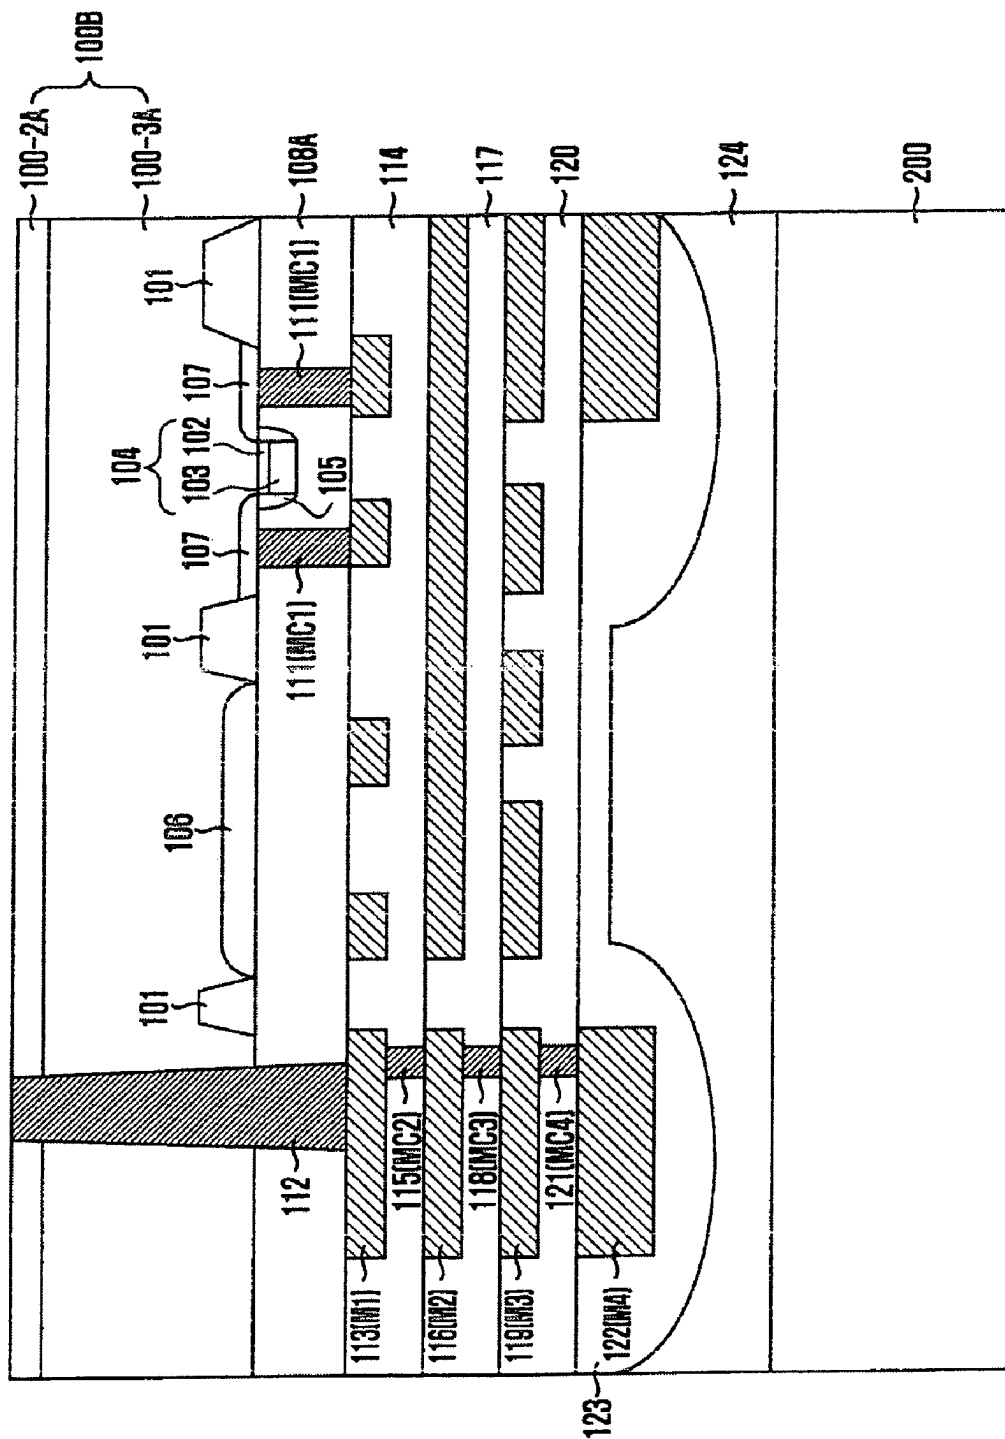


FIG. 2G

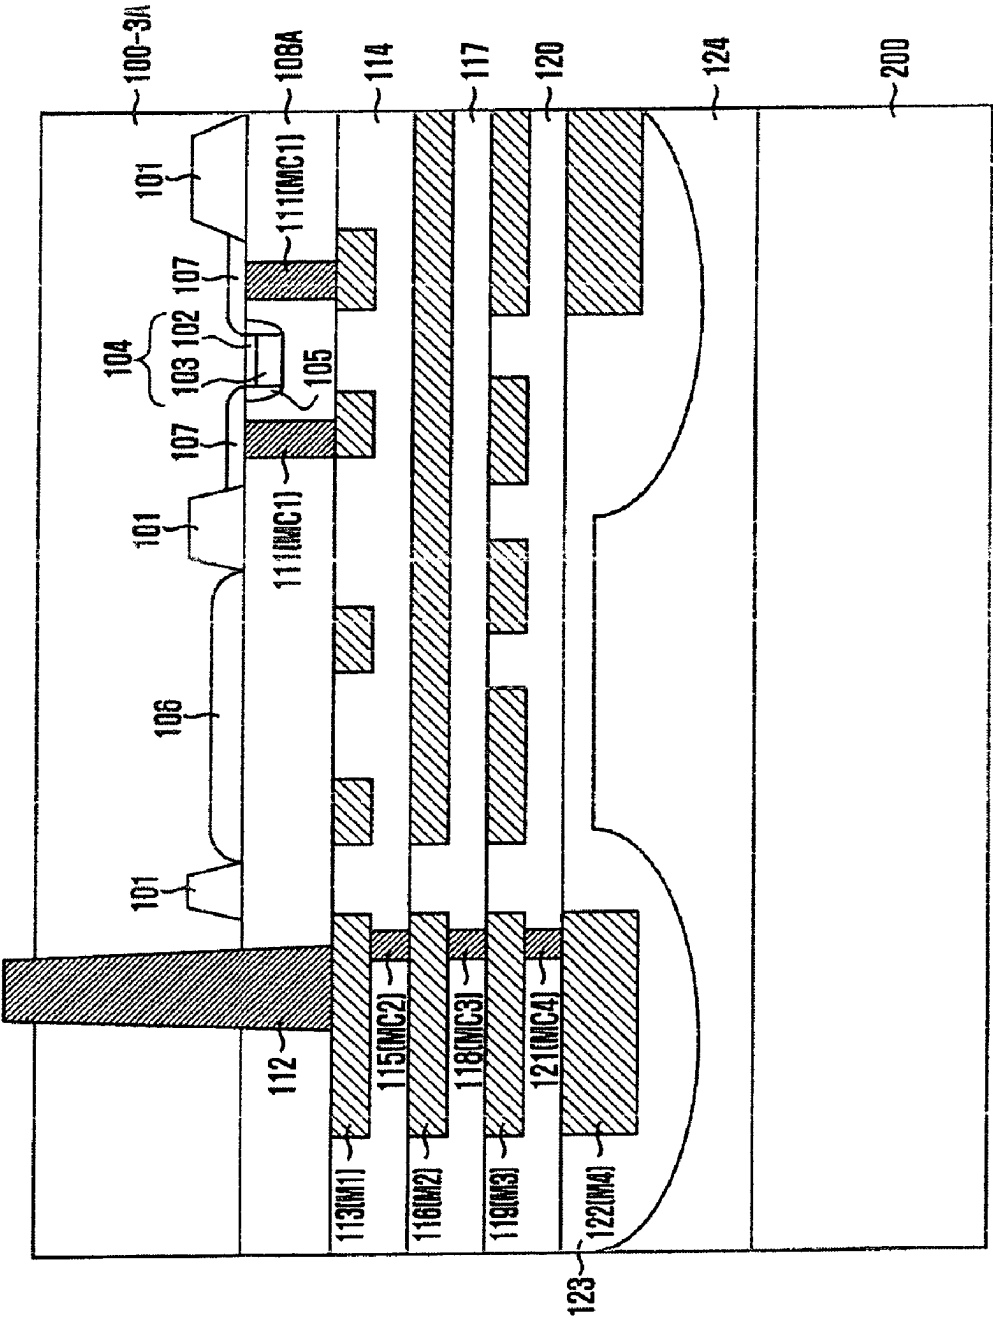

FGH

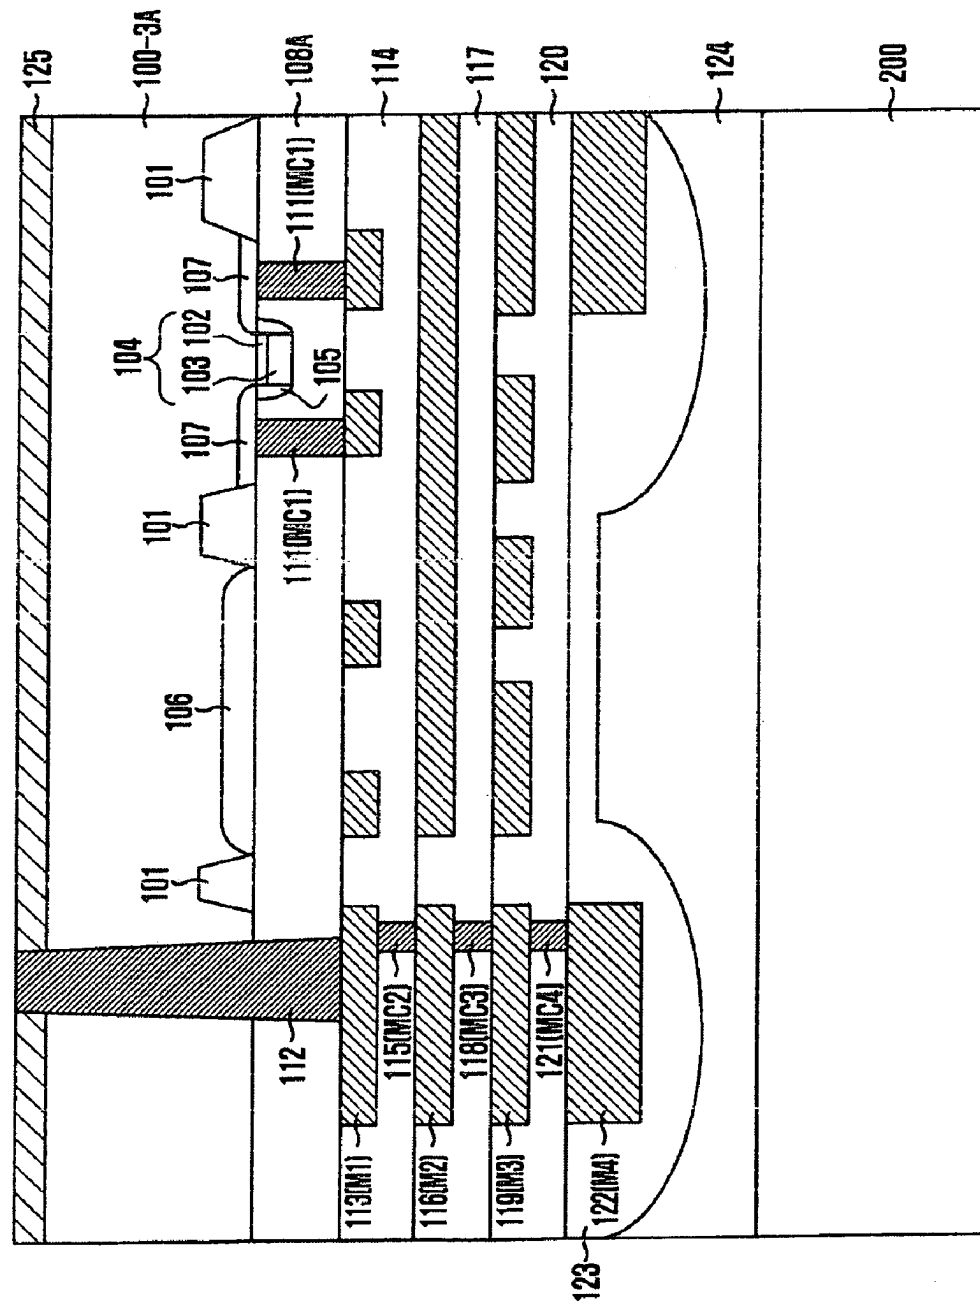
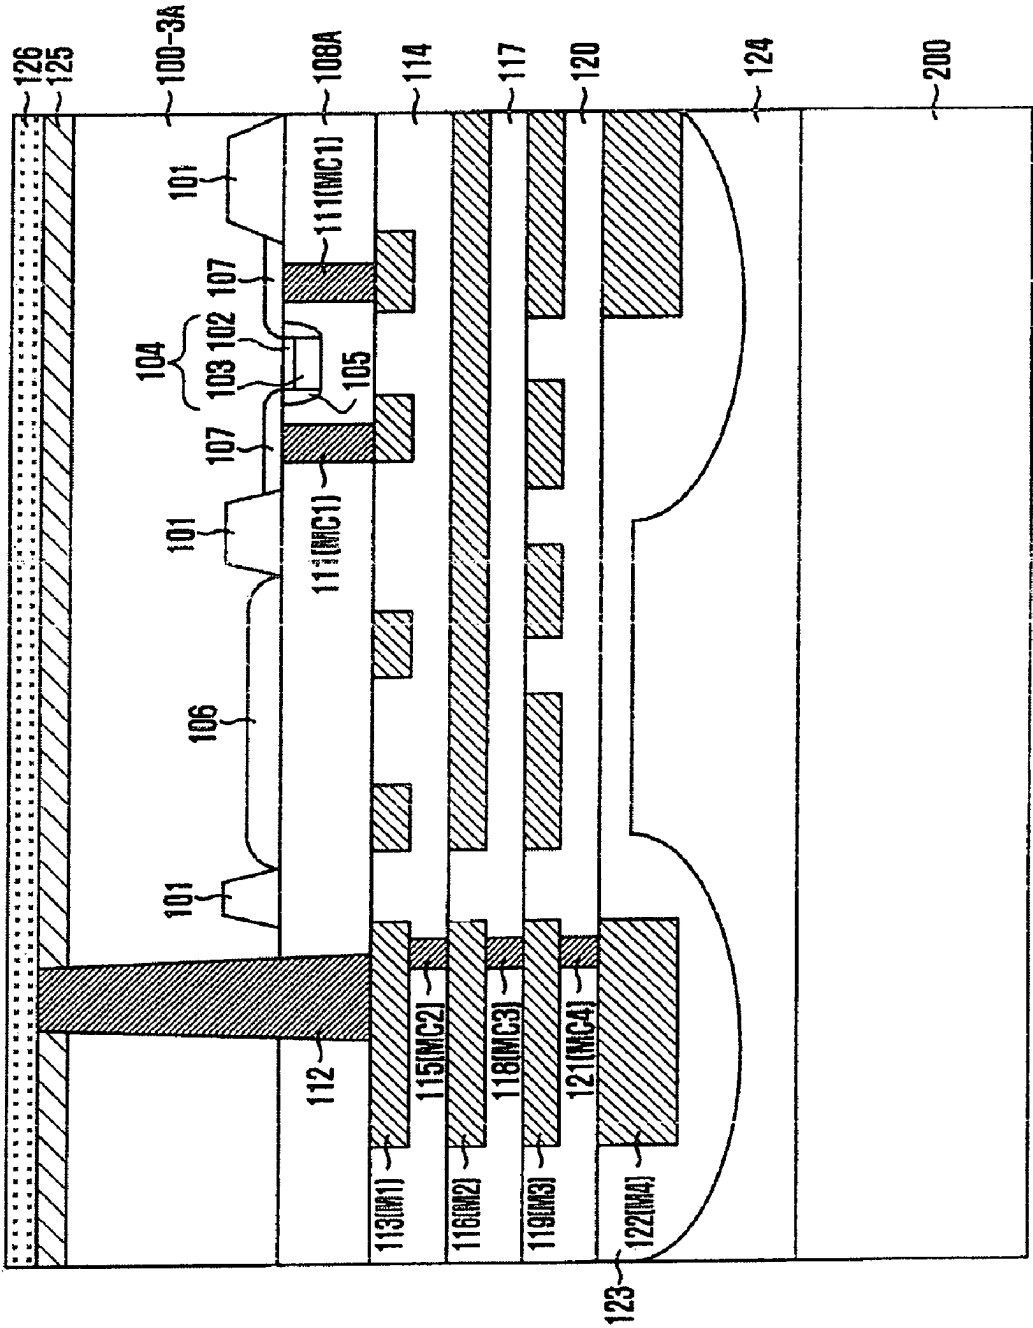


FIG. 2I





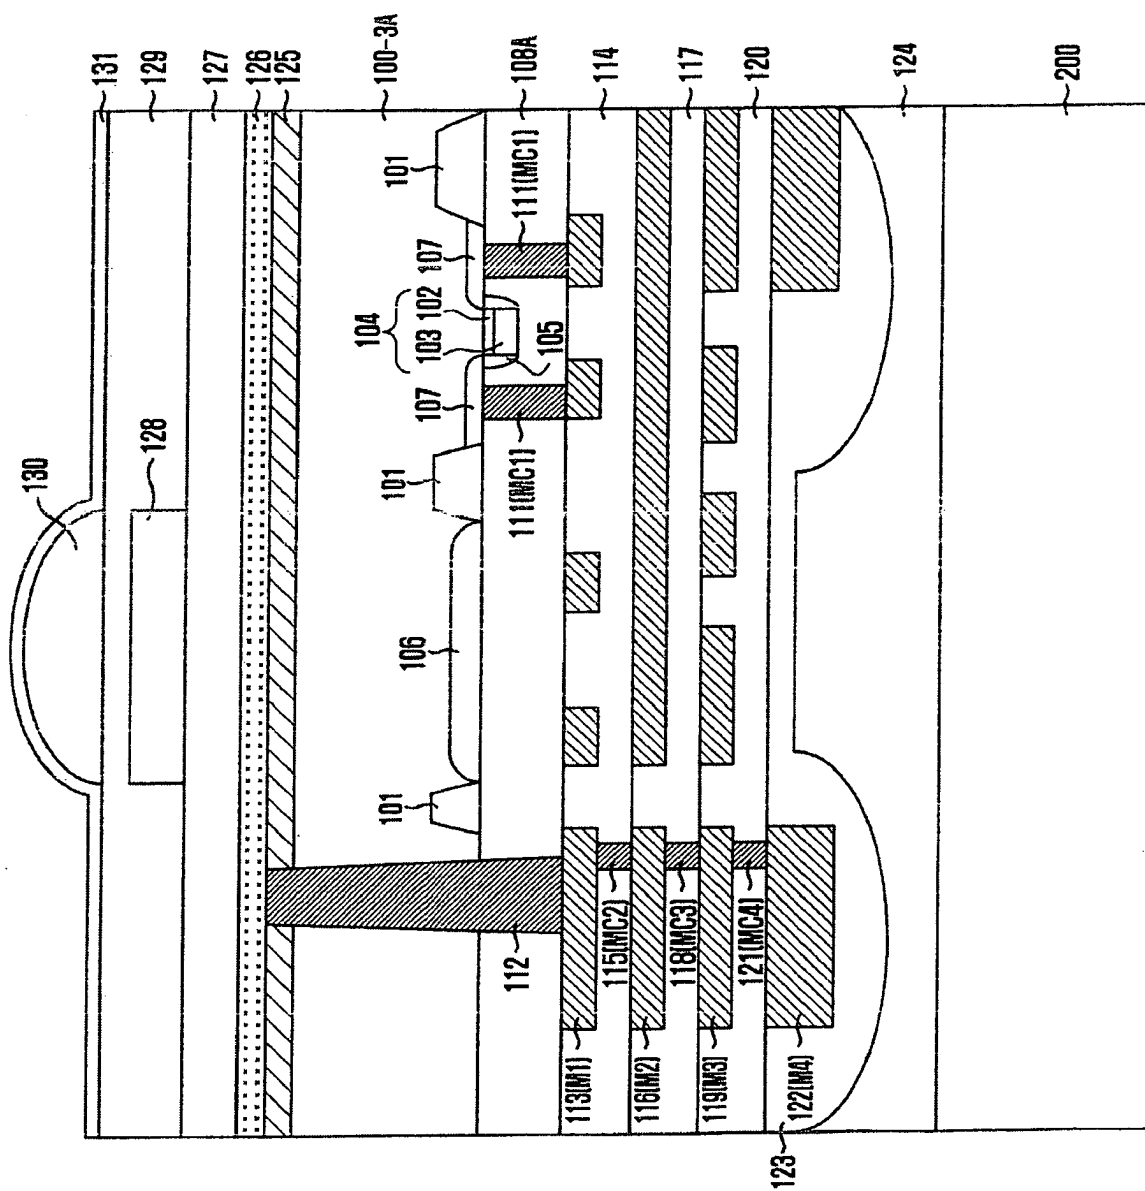


FIG. 2J

FIG. 3

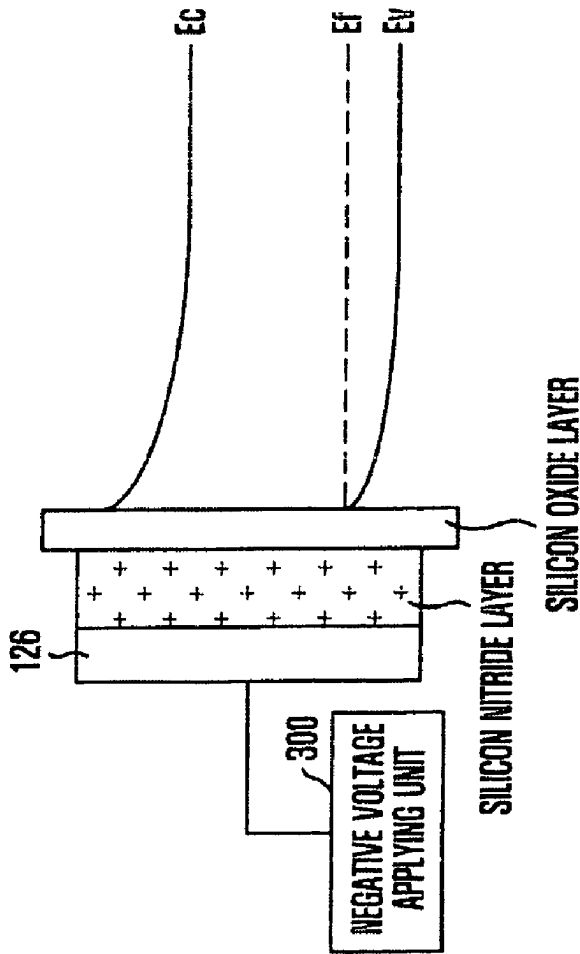


(A)

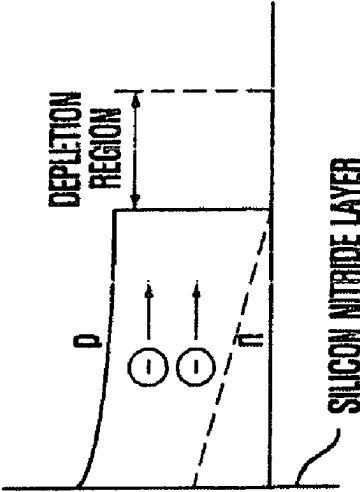


(B)

FIG. 4

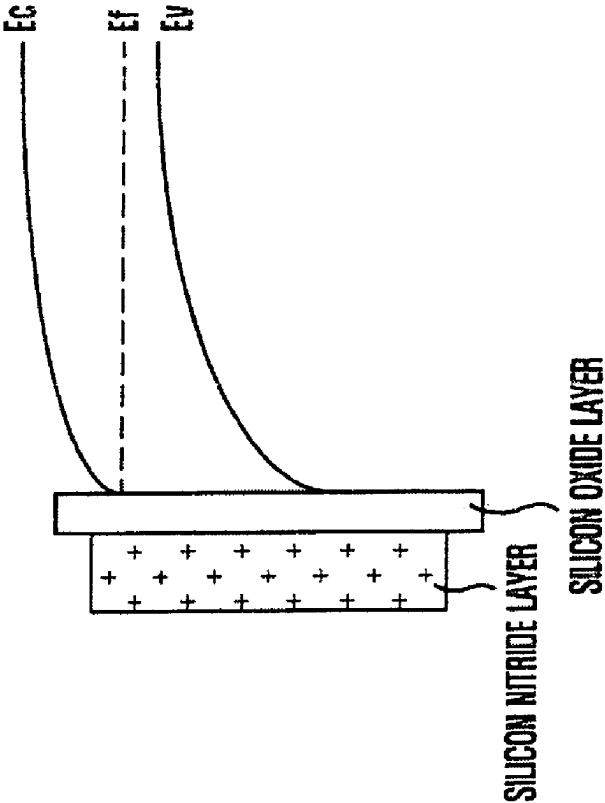

[A]

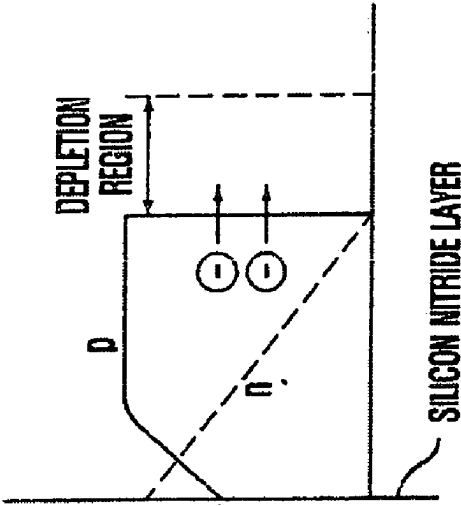

[B]

BACKSIDE ILLUMINATED IMAGE SENSOR**BACKGROUND OF THE INVENTION**

The present invention relates to an image sensor, and more particularly, to the illuminated backside of a backside illuminated image sensor.

Generally, in a Complementary Metal Oxide Semiconductor Active Pixel Sensor (CMOS APS), which will be referred to as a CMOS image sensor hereinafter, a light receiving element, a digital control block, and a peripheral circuit such as an analog-to-digital converter are arranged in a limited area within a chip. Thus, an area ratio of a pixel array per a chip area is limited to about 40%. Also, since a pixel size is greatly reduced for implementation of high quality images, the amount of light that one light receiving element can collect is reduced and noise is increased, causing various problems such as image loss resulting from noise increase.

SUMMARY OF THE INVENTION

Embodiments of the present invention are directed to a backside-illuminated image sensor, in which light illuminates the backside of a substrate (which is the wafer).

In accordance with an aspect of the present invention, there is provided a backside illuminated image sensor including a substrate, a backside passivation layer disposed on backside of the substrate, and a transparent conductive layer disposed on the backside passivation layer.

In accordance with another aspect of the present invention, there is provided a backside illuminated image sensor including a light receiving element disposed in a first substrate, an interlayer insulation layer disposed on the first substrate having the light receiving element, an align key spaced apart from the light receiving element and passing through the interlayer insulation layer and the first substrate, a plurality of interconnection layers disposed on the interlayer insulation layer in a multi-layered structure, wherein the backside of the lowermost interconnection layer is connected to the align key, a front side passivation layer covering the interconnection layers, a backside passivation layer disposed on the backside of the first substrate, a transparent conductive layer disposed on the backside passivation layer and connected to the align key, and a color filter and a microlens disposed on the transparent conductive layer to face the light receiving element.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view illustrating a backside-illuminated image sensor in accordance with an embodiment of the present invention.

FIGS. 2A to 2J are cross-sectional views describing a method for fabricating a backside illuminated image sensor in accordance with an embodiment of the present invention.

FIG. 3 shows an energy band when negative voltage is applied to a transparent conductive layer.

FIG. 4 shows and energy band when a backside passivation layer is a silicon nitride layer.

DESCRIPTION OF SPECIFIC EMBODIMENTS

Embodiments of the present invention relate to a backside illuminated image sensor in accordance with an embodiment of the present invention.

Referring to the drawings, the illustrated thickness of layers and regions are exaggerated to facilitate explanation. When a first layer is referred to as being "on" a second layer

or "on" a substrate, it could mean that the first layer is formed directly on the second layer or the substrate, or it could also mean that a third layer may exist between the first layer and the substrate. Furthermore, the same or like reference numerals throughout the various embodiments of the present invention represent the same or like elements in different drawings.

FIG. 1 is a cross-sectional view illustrating a backside illuminated image sensor in accordance with an embodiment of the present invention.

Only a photodiode and a gate electrode of a driving transistor in a unit pixel of a CMOS image sensor are illustrated in FIG. 1 for convenience.

Referring to FIG. 1, the backside illuminated image sensor in accordance with the embodiment of the present invention includes a second semiconductor pattern **100-3A**, a backside passivation layer **125** disposed on backside of the second semiconductor pattern **100-3A**, and a transparent conductive layer **326** disposed on the backside passivation layer **125**.

The second semiconductor pattern **100-3A** includes a p-type conductive material (hereinafter, a first conductive material). The second semiconductor pattern **100-3A** is doped with p-type impurity ions such as boron (B) which is a member of a third family in a periodic table. The second semiconductor pattern **100-3A** may include one layer selected from the group consisting of a silicon (Si) layer, a germanium (Ge) layer, a silicon germanium (SiGe) layer, a gallium phosphide (GaP) layer, a gallium arsenide (GaAs) layer, a silicon carbide (SiC) layer, a silicon germanium carbon (SiGeC) layer, an indium arsenide (InAs) layer, and a stack structure thereof. Preferably, the second semiconductor pattern **100-3A** may include the Si layer. The second semiconductor pattern **100-3A** may be a bulk substrate or a substrate formed over a buried insulation layer in a Silicon On Insulator (SOI) layer. Also, the second semiconductor pattern **100-3A** may be an epitaxial layer disposed on the SOI substrate. In this embodiment, the substrate is the SOI substrate formed over the buried insulation layer in the SOI substrate.

The backside passivation layer **125** functions as an anti-reflection layer. The backside passivation layer **125** is a dielectric coating layer formed over an optical surface. The anti-reflection layer reduces a light reflection power of the optical surface in a predetermined range. Generally, an operation principle of the reduction in the light reflection power is that waves reflecting from other interfaces are removed by a destructive interference. In a simplest case, the anti-reflection layer designed for a vertical incidence includes a material with a single quarter-wave layer. A refractive index of the material is close to a geometric average of two neighboring media. In this case, two reflections of the same degree are generated on the interface of the two media and then removed by the destructive interference between them.

The backside passivation layer **125** has a multi-layered structure where materials having different refractive indexes are stacked. The number of layers for the multi-layered structure is not limited and the layers can be selected in a range improving reflection characteristics of the backside passivation layer **125**. The backside passivation layer **125** includes a layer having a lower refractive index than the second semiconductor pattern **100-3A**. Also, when the backside passivation layer **125** has a stack structure, as the layer comes closer to the backside of the second semiconductor pattern **100-3A**, the layer begins to have a low refractive index.

For instance, the backside passivation layer **125** includes a first insulation layer and a second insulation layer. The first insulation layer is formed between the second insulation layer and the second semiconductor pattern **100-3A**. The second insulation layer includes a nitride layer. Preferably, the sec-

ond insulation layer includes a silicon nitride compound. More preferably, the second insulation layer includes a silicon nitride layer or a silicon oxy-nitride layer. Herein, the nitride layer is formed to have a thickness of approximately 50 nm to approximately 500 nm. The first insulation layer includes a material having a refractive index lower than the second insulation layer and lower than the second semiconductor pattern **100-3A**. Preferably, the first insulation layer includes an oxide layer. More preferably, the first insulation layer includes a silicon oxide layer. The silicon oxide layer may be one selected from a group consisting of a native silicon oxide layer, a grown silicon oxide layer, and a deposited silicon oxide layer. Herein, the silicon oxide layer is formed to have a thickness of approximately 2 nm to approximately 50 nm.

A transparent conductive layer **126** includes a Transparent Conductive Oxides (TCO). The transparent conductive layer **126** may include one selected from a group consisting of an Indium Tin Oxide (ITO) layer, a Zinc Oxide (which includes ZnO, ZO) layer, a Tin Oxide (which includes SnO, TO) layer and a Zinc Tin Oxide (ZTO) layer. The ITO layer may be doped with one selected from a group consisting of cobalt (CO), titanium (Ti), tungsten (W), molybdenum (Mo) and chrome (Cr). The ZO layer is doped with one selected from a group consisting of magnesium (Mg), zirconium (Zr), and lithium (Li). The TCO layer is formed to have a thickness of approximately 10 nm to approximately 500 nm. The transparent conductive layer **126** may include a polysilicon layer or a metal layer. The polysilicon layer and the metal layer are formed to have a thin thickness to transmit incidence light to the second semiconductor pattern **100-3A**. For instance, the polysilicon layer is formed to have a thickness not greater than approximately 40 nm. Preferably, the polysilicon layer is formed to have a thickness of approximately 1 nm to approximately 40 nm. The metal layer includes a noble metal. For instance, the precious metal includes gold (Au) or platinum (Pt). The precious layer is formed to have a thickness not greater than approximately 1 nm. The precious metal may be formed to have a thickness of approximately 0.1 nm to approximately 1 nm.

The backside illuminated image sensor in accordance with the first embodiment of the present invention includes a first substrate, for example, a light receiving element **106**, which is formed in the second semiconductor pattern **100-3A**, a first interlayer insulation pattern **108A** formed over the second substrate pattern **100-3A**, an align key **112** spaced apart from the light receiving element **106** and passing through the first interlayer insulation pattern **108A** and the first semiconductor pattern **100-1A**, first to fourth interconnection layers **113**, **116**, **119** and **122** formed over the first interlayer insulation pattern **108A** in a multi-layered structure, where the backside of the first interconnection layer **113** among the first to fourth interconnection layers **113**, **116**, **119** and **122** is connected to the align key **112**, a passivation layer **124** covering the interconnection layers **113**, **116**, **119** and **122**, a backside passivation layer **125** disposed on the backside of the first substrate, a transparent conductive layer **126** formed on the backside of the first substrate to be connected to the align key **112**, and a color filter **128** and a microlens **130** overlapping the light receiving element **106** disposed on the transparent conductive layer **126**.

The first substrate **100** (refer to FIG. 2A) may be a bulk substrate, an epitaxial substrate, or a silicon-on-insulator (SOI) substrate. Considering the device characteristics, an SOI substrate where a first semiconductor layer, a buried insulation layer, and a second semiconductor layer are stacked is used as the first substrate **100**, and a relatively

cheap bulk substrate is used as the second substrate **200** (refer to FIG. 2E). In this invention, the first and the second substrates **100** and **200** are SOI substrates.

The align key **112** functions as an align mark during a color filter **128** and a microlens **130** formation process. The align key **112** is provided in plurality. The backside of multiple of align keys **112** connect to the transparent conductive layer **126**. The top surface of the align key **112** is connected to the first interconnection layer **113** among the first to fourth interconnection layers **113**, **116**, **119** and **122**, and the align key **112** transfers negative voltage applied from a negative voltage applying unit **300** (refer to FIG. 3) to the transparent conductive layer **126**. The align key **112** may be formed of a conductive material, for example, a metal or an alloy. In addition, the align key **112** may be formed in a circular, oval, or polygonal (such as triangular, rectangular, pentagonal, etc.) shape. There is no limitation in the number and size (which is width) of the align key **112**.

The backside illuminated image sensor in accordance with the first embodiment of the present invention may include a positive voltage applying unit (not shown) applying positive voltage (+) to the align key **112** or the transparent conductive layer **126**, instead of the negative voltage applying unit **300**, to invert the backside of the first substrate **100**.

Also, the backside illuminated image sensor in accordance with the first embodiment of the present invention further includes a barrier layer (not shown) surrounding an outer wall of the align key **112**. The barrier layer (not shown) may include a metal layer or an insulation layer. More specifically, the metal layer may include a Ti/TiN layer, and the insulation layer may include a nitride layer, e.g., a silicon nitride layer, an oxide layer, e.g., a silicon oxide layer, or a stack structure thereof, e.g., an oxide/nitride layer.

In addition, the backside illuminated image sensor in accordance with the embodiment of the present invention further includes a plurality of transistors for transmitting and amplifying optical signals of the light receiving element **106**. For instance, a driving transistor includes a first substrate pattern **100A**, a gate electrode **104** formed between the first substrate pattern **100A** and the first interlayer insulation pattern **108A**, and source and drain regions **107** formed in the first substrate **100** exposed on both sides of the gate electrode **104**.

The backside illuminated image sensor in accordance with the embodiment of the present invention further includes a negative voltage applying unit **300**. The negative voltage applying unit **300** directly provides the negative voltage to the transparent conductive layer **126**. The negative voltage applying unit **300** also provides the negative voltage to the transparent conductive layer **126** through the align key **112** connected to the transparent conductive layer **126**. The negative voltage applying unit **300** can be formed in the second substrate **200**.

FIG. 4 shows an energy band when the backside passivation layer is a silicon nitride layer.

Referring to FIG. 4, the silicon nitride layer includes positive charge. The silicon nitride layer including the positive charges inverts the backside of the exposed semiconductor layer. The inverted backside of the substrate reduces surface recombination and surface generation. The reduction in the surface recombination increases quantum efficiency and the reduction in the surface generation reduces dark current leakage.

When the silicon nitride layer connects to the substrate (or a silicon oxide layer and a substrate) in an equilibrium state, charge (which are electrons) is accumulated at an interface between the silicon nitride layer and the substrate because of

5

positive charge in the silicon nitride layer. Thus, valence band (E_v) becomes further away from the fermi level (E_f) at an interface between the silicon nitride layer and the substrate. That is, an inversion state is accomplished. The inversion state results in the conduction band (E_c) becoming closer to the Fermi level (E_f). When the light is illuminated in the inversion state, charge (electrons), i.e., photo current, is generated. This results in even more electrons in the inversion layer that can diffuse towards the light receiving element and the charge (electrons) easily flows into the light receiving element. That is, the photo current generated at the interface easily flows into the light receiving element. Alternatively a positive voltage can be applied to a transparent conductive layer **126** to invert the back surface.

FIG. 3 shows an energy band when negative voltage is applied to a transparent conductive layer.

Referring to FIG. 3, in the equilibrium state, the valence band (E_v) becomes close to the fermi level (E_f). When the negative voltage is applied to the transparent conductive layer the potential difference between the fermi level (E_f) and conduction band becomes high. It becomes difficult to generate charge (electrons), i.e. dark current, and thus the dark current cannot flow into the light receiving element. When the light is illuminated in this state, charge (electrons), i.e., photo current, is generated and can diffuse towards the light receiving element. That is, the photo current generated at the interface easily flows into the light receiving element. FIGS. 2A to 2J are cross-sectional views of a method for fabricating a backside illuminated image sensor in accordance with a second embodiment of the present invention. In this embodiment, the substrate is an SOI substrate.

The backside illuminated image sensor in accordance with the second embodiment of the present invention has a structure in which a device wafer and a handle wafer **200** are attached together. The device wafer is a wafer where a light receiving element such as a photodiode is formed, and where peripheral circuits such as a digital block and an analog-to-digital converter are formed. In the following description, the device wafer and the handle wafer will be referred to as a first substrate and a second substrate, respectively.

Referring to FIG. 2A, the first substrate **100** is an SOI substrate. The SOI substrate includes a first semiconductor layer **100-1**, a buried insulation layer **100-2**, and a second semiconductor layer **100-3**. The second semiconductor layer **100-3** may be doped with a first conductivity type or a second conductivity type. For instance, the second semiconductor layer **100-3** is doped with the first conductivity type. In addition, the buried insulation layer **100-2** may be formed to have a thickness of approximately 500 Å to approximately 10,000 Å, and the second semiconductor layer **100-3** may be formed to have a thickness of approximately 1 μm to approximately 10 μm.

An isolation layer **101** is locally formed in the first substrate **100**. Although the isolation layer **101** may be formed through a Shallow Trench Isolation (STI) process or a Local Oxidation of Silicon (LOCOS) process, it is preferable that the isolation layer **101** is formed using the STI process that is advantageous to the realization of high integration density, as illustrated in FIG. 2A. If the STI process is performed, the isolation layer **101** may include a High Density Plasma (HDP) layer, which has an excellent filling characteristic for a high aspect ratio, or a stack structure of an HDP layer and a spin on insulation (SOD) layer.

Gate insulation layer **102** and gate conductive layer **103** are formed over the first substrate **100** and then etched to form a gate electrode **104** of a driving transistor. At the same time, although not shown, gate electrodes of a transfer transistor, a

6

reset transistor, and a select transistor constituting a unit pixel of a CMOS image sensor can be formed.

Spacers **105** may be formed on both sidewalls of the gate electrode **104**. The spacers **105** may include an oxide layer, a nitride layer, or a stack structure thereof.

Before the spacers **105** are formed, a gate electrode **104** is formed. A lightly doped drain (LDD) region (not shown) doped with n-type (hereinafter, a second conductivity type) is formed in the first substrate **100** exposed on both sides of the gate electrode **104**.

A photodiode serving as a light receiving element **106** is formed in the first substrate **100** through an ion implantation process. In this case, the light receiving element **106** is doped with the second conductivity type. The photodiode has a relatively thin doping profile in FIG. 2A. However, this is for the convenience and the doping profile (depth, width) can be properly changed.

Source and drain regions **107** doped with the second conductivity type is formed in the first substrate **100** exposed on both sides of the spacers **105**. The source and drain regions **107** has a higher doping concentration than the LDD region and the light receiving element **106**.

In order to prevent surface noise of the light receiving element **106**, a doping region (not shown) doped with the first conductivity type may be further formed to cover the top surface of the light receiving element **106**.

Although it has been described above that the gate electrode **104**, the spacers **105**, the light receiving element **106**, and the source and drain regions **107** are sequentially formed, their formation order is not limited to the above embodiment, but may be appropriately changed according to the fabricating processes.

A first interlayer insulation layer **108** is formed to cover the first substrate **100**, including the gate electrode **104**, the spacers **105**, the photodiode **106**, and the source and drain region **107**. The first interlayer insulation layer **108** may include an oxide layer, for example, a silicon oxide layer (SiO_2). More specifically, the first interlayer insulation layer **108** may include one layer selected from the group consisting of a BoroPhosphoSilicate Glass (BPSG) layer, a PhosphoSilicate Glass (PSG) layer, a BoroSilicate Glass (BSG) layer, an Undoped Silicate Glass (USG) layer, a Tetra Ethyle Ortho Silicate (TEOS) layer, an HDP layer, and a stacked layer thereof. In addition, the first interlayer insulation layer **108** may include a layer such as a Spin On Dielectric (SOD) layer which is deposited by a spin coating process.

Referring to FIG. 2B, an etch process is performed to locally etch the first interlayer insulation layer **108** to form a contact hole **109** exposing the source and drain regions **107**. The etch process may be performed using a dry etch process or a wet etch process. It is preferable to perform the dry etching process so that a vertically etched surface can be acquired.

The first interlayer insulation layer **108** and the first substrate **100** are locally etched. Hereinafter, the etched first interlayer insulation layer **108** and the first substrate **100** are called to a first interlayer insulation pattern **108A** and first substrate pattern **100A**, respectively. Thus, a via hole, **110** extending from the first interlayer insulation pattern **108A** to a first semiconductor pattern **100-1A** is formed. At this point, a plurality of via holes **110** may be formed in a matrix configuration.

More specifically, the via hole **110** has a vertical angle of approximately 88 degrees to approximately 90 degrees and a depth of approximately 20,000 Å from the top surface of the first interlayer insulation pattern **108A**, preferably approximately 4,000 Å to approximately 20,000 Å. More preferably,

the via hole **110** is formed to a depth of approximately 1,000 Å to approximately 10,000 Å from the top surface of the second Semiconductor pattern **100-3A**. In addition, the via hole **110** has a critical dimension (CD) of approximately 0.1 μm to approximately 2.0 μm. The via hole **110** has a bottom width of less than approximately 1.6 μm, preferably approximately 1.0 μm to approximately 1.6 μm. When a plurality of via holes **110** are formed, it is preferable that the deviation in their angles, depths and widths is less than 4%. Furthermore, there is no limitation in the number and shape of the via hole **110**. In particular, the via hole **110** may be formed in various shapes, for example, a circular shape or a polygonal (such as triangular, rectangular, pentagonal, octagonal, etc.) shape.

Meanwhile, there is no limitation in the formation order of the contact hole **109** and the via hole **110**. The contact hole **109** may be formed after forming the via hole **110**. In addition, the contact hole **109** and the via hole **110** may be formed in-situ within the same plasma etching apparatus.

For example, the via hole **110** is formed using a dry etching process in two steps.

A first step is to etch the first interlayer insulation layer **108**. The etching process is performed under the conditions that an etch selectivity of the first interlayer insulation layer **108** to a photoresist pattern (not shown) ranges from 5:1 to 2:1, preferably 2.4:1. In addition, an etch rate is in the range of approximately 7,000 Å/min to approximately 8,000 Å/min, preferably 7,200 Å/min. As the etching conditions, a pressure is in the range of approximately 100 mTorr to approximately 200 mTorr, and a source power is in the range of approximately 100 W to approximately 2,000 W. A carbon fluoride compound, for example, a fluoroform (CHF₃) or tetrafluoromethane (CF₄), is used as a source gas, and argon (Ar) is further added to the source gas in order to increase an etching speed and anisotropy. A flow rate of CHF₃ is in the range of approximately 5 sccm to approximately 200 sccm, a flow rate of CF₄ is in the range of approximately 20 sccm to approximately 200 sccm, and a flow rate of Ar is in the range of approximately 100 sccm to approximately 2,000 sccm.

A second step is to etch the first substrate **100**. In the second step, an etch rate is in the range of approximately 1,000 Å/min to approximately 3,000 Å/min, preferably 2,000 Å/min. As the etching conditions, a pressure is in the range of approximately 15 mTorr to approximately 30 mTorr. A source power (e.g., RF power) is in the range of approximately 400 W to approximately 600 W, and a bias power for improving the straightness of ions is in the range of approximately 80 W to approximately 120 W. Sulfur hexafluoride (SF₆) and O₂ is used as a source gas. A flow rate of SF₆ is in the range of approximately 5 sccm to approximately 200 sccm, a flow rate of O₂ is in the range of approximately 1 sccm to approximately 100 sccm.

In the second step, the etch process may be performed to etch a portion of the buried insulation layer **100-2** or to etch the buried insulation layer **100-2** and a portion of the first semiconductor layer **100-1**. In the former case, the buried insulation layer **100-2** may be over-etched by approximately 100 Å to approximately 4,000 Å. Hereinafter, the etched buried insulation layer **100-2** and etched first semiconductor layer **100-1** are called buried insulation pattern **100-2A** and first semiconductor pattern **100-1A**, respectively.

Referring to FIG. 2C, barrier layers (not shown) may be formed on inner surfaces of the contact hole **109** (refer to FIG. 2B) and the via hole **110** (refer to FIG. 2B). The barrier layer may include one layer selected from the group consisting of a titanium (Ti) layer, a titanium nitride (TiN) layer, a tantalum (Ta) layer, a tantalum nitride (TaN) layer, an aluminum silicon titanium nitride (AlSiTiN) layer, a nickel titanium (NiTi)

layer, a titanium boron nitride (TiBN) layer, a zirconium boron nitride (ZrBN) layer, a titanium aluminum nitride (TiAlN) layer, a titanium diboride (TiB₂) layer, and a stack structure thereof, for example, a Ti/TiN layer and a Ta/TaN layer. In order to minimize the reduction in the width of the contact hole **109**, especially the via hole **110**, the barrier layer is formed to a thickness of less than 100 Å, preferably approximately 50 Å to approximately 100 Å, using an atomic layer deposition (ALD) process having an excellent step coverage. In addition, the barrier layer may be formed through a metal organic chemical vapor deposition (MOCVD) process or a physical vapor deposition (PVD) process.

Furthermore, the barrier layer may include an oxide layer, e.g., a silicon oxide layer, a nitride layer, e.g., a silicon nitride layer, and a stack structure thereof, e.g., a nitride/oxide layer. In the case of the nitride/oxide layer, the oxide layer and the nitride layer are formed in a liner so that the nitride/oxide layer has a total thickness of less than 200 Å. In this way, the reduction in the width of the via hole **110** is minimized.

The contact hole **109** and the via hole **110** are filled with a conductive material to form a first contact plug **111** and an align key **112**. The conductive material may include one material selected from the group consisting of copper (Cu), platinum (Pt), tungsten (W), aluminum (Al), and an alloy thereof. The conductive material is not limited to the above-listed materials, but includes any metal or metal alloy having conductive properties. When the W is used as the conductive material, a chemical vapor deposition (CVD) process or an ALD process is performed. When the Al is used as the conductive material, a CVD process is used. When copper (Cu) is used as the conductive material, an electroplating process or a CVD process is performed.

Meanwhile, as described above, the first contact plug **111** and the align key **112** may be formed at the same time. Also, the align key **112** may be formed after forming the first contact plug **111**, or vice versa. When the first contact plug **111** and the align key **112** are not formed at the same time, they may be formed of different materials. For example, the first contact plug **111** is formed of impurity-doped polysilicon, and the align key **112** is formed of the above-described material.

Referring to FIG. 2D, first to fourth interconnection layers **113**, **116**, **119** and **122**, second to fourth contact plugs **115**, **118** and **121**, second to fifth interlayer insulation layers **114**, **117**, **120** and **123** are formed. For example; a portion of the first interconnection layer **113** among the first to fourth interconnection layers **113**, **116**, **119** and **122** is electrically separated from and connected to the first contact plug **111**, and another portion of the first interconnection layer **113** is connected to the align key **112**.

The first to fourth interconnection layers **113**, **116**, **119** and **122** are formed through a deposition process and an etching process. The first to fourth interconnection layers **113**, **116**, **119** and **122** are formed of a conductive material, for example, a metal, or an alloy containing at least two metals. Preferably, the first to fourth interconnection layers **113**, **116**, **119** and **122** are formed of aluminum (Al). The second to fourth contact plugs **115**, **118** and **121** are formed in the second to fifth interlayer insulation layers **114**, **117**, **120** and **123** through a damascene process. In order to electrically connect the first to fourth interconnection layers **113**, **116**, **119** and **122** that are vertically stacked, the second to fourth contact plugs **115**, **118** and **121** are formed of a conductive material, for example, an impurity-doped polysilicon and a metal, or an alloy containing at least two metals. Preferably, the second to fourth contact plugs **115**, **118** and **121** are formed of tungsten (W). The second to fifth interlayer insulation layers **114**, **117**, **120** and

123 may include an oxide layer selected from the group consisting of a BPSG layer, a PSG layer, a BSG layer, an USG layer, a TEOS layer, an HDP layer, and a stack structure thereof. In addition, the second to fourth interlayer insulation layers **114**, **117** and **120** may be planarized using a CMP process.

There is no limitation in the layer number and structure of the first to fourth interconnection layers **113**, **116**, **119** and **122** and the second to fourth contact plugs **115**, **118** and **121**. The layer number and structure of the interconnection layers and the contact plugs may be variously changed according to the device design.

A front side passivation layer **124** is formed over the fifth interlayer insulation layer **123**. The front side passivation layer **124** may include one layer selected from the group consisting of a BPSG layer, a PSG layer, a BSG layer, an USG layer, a TEOS layer, and an HDP layer. Preferably, the front side passivation layer **124** is formed using the TEOS layer or the HDP layer to a thickness of approximately 1,000 Å to approximately 40,000 Å. In addition, the front side passivation layer **124** may include a nitride layer or a stack structure of an oxide layer and a nitride layer.

The front side passivation layer **124** is planarized. The planarization process may be performed through a chemical mechanical polishing (CMP) process.

A thermal treatment may be performed for densifying the front side passivation layer **124**. The thermal treatment may be performed through an annealing process using a furnace.

Referring to FIG. 2E, the first substrate pattern **100A** fabricated through the processes of FIGS. 2A to 2D is bonded to a second substrate **200**. The bonding process is performed using one method selected from the group consisting of an oxide/oxide bonding, an oxide/silicon bonding, an oxide/metal bonding, an oxide/adhesive/oxide bonding, and an oxide/adhesive/silicon bonding.

For example, the oxide/oxide (formed over the second substrate **200**) bonding and the oxide/silicon (silicon substrate) bonding are to bond the two substrates after a plasma treatment using O₂ or N₂ and a water treatment. In addition to the method of bonding two substrates after the water treatment, the two substrates can be bonded together after a chemical treatment using amine. In the oxide/metal (formed over the second substrate **200**) bonding, the metal layer may be formed of a metal such as titanium (Ti), aluminum (Al) or copper (Cu). In the oxide/adhesive/oxide bonding and the oxide/adhesive/silicon bonding, Benzo Cyclo Butene (BCB) may be used as the adhesive member.

Referring to FIG. 2F, a back grinding process is performed to grind the backside of the first substrate pattern **100A** (refer to FIG. 2E). In this case, if the align key **112** is formed to pass through the buried insulation pattern **100-2A**, the align key **112** is exposed by performing the back grinding process until the buried insulation pattern **100-2A** is exposed. During this process, the buried insulation pattern **100-2A** may be removed by a predetermined thickness. Meanwhile, if the align key **112** is formed not to pass through the buried insulation pattern **100-2A**, that is, the align key **112** extends into the buried insulation pattern **100-2A** by a predetermined depth, the buried insulation pattern **100-2A** may be partially or entirely removed to expose the align key **112**. Alternatively, the buried insulation pattern **100-2A** may be etched through a separate etch process.

Referring to FIG. 2G, the buried insulation pattern **100-2A** (refer to FIG. 2F) remaining on the second semiconductor pattern **100-3A** is locally removed. The removal process is performed through a wet etch process. For instance, when the buried insulation pattern **100-2A** includes the silicon nitride

layer, the wet etch process is performed using a Buffered Oxide Etchant (BOE) or Diluted HF (DHF).

Referring to FIG. 2H, a backside passivation layer **125** is formed over the second semiconductor pattern **100-3A** where the buried insulation pattern **100-2A** (refer to FIG. 2F) is removed. The backside passivation layer **125** has a stack structure of a first insulation layer and a second insulation layer having different refractive indexes. The silicon oxide layer may be one selected from the consisting of a native oxide layer, a grown oxide layer, and a deposition oxide layer. The grown oxide layer is formed through one of a dry oxidation process, a wet oxidation process, and a radical ion oxidation process. The deposition oxide layer is formed through a Chemical Vapor Deposition (CVD) process. The silicon oxide layer and the silicon nitride layer are formed to have a thickness of approximately 2 nm to approximately 50 nm and approximately 100 nm to approximately 500 nm, respectively.

Meanwhile, the deposition process of the backside passivation layer **125** having the multi-layered structure may be performed in-situ within the same chamber in order to obtain the increased stability and the reduced processing time of the fabrication process. If the in-situ process is impossible, the deposition process may be performed ex-situ in a different chamber.

In the backside passivation layer **125**, the silicon nitride layer is deposited on the backside of the align key **112**. However, an etch-back process or a CMP process is additively performed to selectively remove a portion deposited on the backside of the align key **112**. Thus, the backside of the align key **112** is exposed.

Referring to FIG. 2I, a transparent conductive layer **126** is formed over the backside passivation layer **125**. The transparent layer **126** is a TCO layer. The transparent layer **126** may include one selected from a group consisting of an ITO layer, a ZO layer, a SnO and a ZTO layer. The ITO layer is doped with one selected from a group consisting of CO, Ti, W, Mo, and Cr. The ZO layer may be doped with one selected from the group consisting of Mg, Zr, and Li. The TCO layer is formed to have a thickness of approximately 10 nm to approximately 500 nm. The transparent conductive layer **126** may include a polysilicon layer or a metal layer. The polysilicon layer is formed to have a thickness of approximately 1 nm to approximately 40 nm for the light penetration. The metal layer may be gold (Au) or platinum (Pt). The metal layer is formed to have a thickness of approximately 0.1 nm to approximately 1 nm.

Referring to FIG. 2J, a first planarization layer **127** may be formed over the transparent conductive layer **126**. The first planarization layer **127** may be formed of an organic material.

Color filter **128** and microlens **130** are formed over the first planarization layer **127**. A second planarization layer **129** may be formed between the color filter **128** and the microlens **130**. The second planarization layer **129** may be formed of an organic material.

Then, a low temperature oxide (LTO) layer **130** is formed to cover the microlens **130**.

The first substrate pattern **100A** and the second substrate **200** are packaged by a packaging process. The packaging process includes a wire bonding process and a sawing process. The wire bonding is achieved by bonding a pad to an external chip through a wire. The connection of a through silicon via interconnect **112** to a bonding pad rather than the transparent conductive oxide is accomplished by conventional techniques.

The embodiments of the present invention can obtain the following effects.

11

First, compared with the typical CMOS image sensor (a front-side illuminated image sensor), the backside illuminated image sensor where light is illuminated from the backside of the substrate (e.g., semiconductor device) can minimize loss of light incident onto the light receiving element, thereby increasing the light receiving efficiency.

Second, the backside passivation layer is formed for preventing the reflection of light incident onto the backside of the substrate. Therefore, the light collecting efficiency of the light receiving element can be increased to improve the light receiving efficiency.

Third, the transparent conductive layer is formed on the backside passivation layer of the substrate (e.g., semiconductor layer). Negative voltage (−) is applied to the transparent conductive layer. Thus, it is possible to minimize the generation of dark current and prevent dark current from the backside of the substrate flowing into the light receiving element. Alternatively a positive voltage (+) is applied to the transparent conductive layer to invert the back surface to prevent dark current from the backside of the substrate.

Fourth, in the method for fabricating the backside illuminated image sensor using the back grinding process, the align key having a via hole shape is formed in the substrate before the back grinding process of grinding the backside of the substrate, and the backside grinding target of the substrate is controlled during the back grinding process. Therefore, the control of the back grinding process is facilitated.

Fifth, the backside of the align key connects to the transparent conductive layer. Thus, the negative voltage applied by the negative applying unit is transmitted to the transparent conductive layer through the align key. The negative voltage applying unit may be disposed on the second substrate, not the first substrate. Various designs are possible in the packaging process.

While the present invention has been described with respect to the specific embodiments, the above embodiments of the present invention are and not limitative but illustrative. Particularly, although the present invention is applied to the CMOS image sensor in the embodiment, the present invention can be applied to any other Charge Coupled Device (CCD), backside illuminated image sensors or 3D structure integrated devices.

It will be apparent to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the invention as defined in the following claims.

What is claimed is:

1. A backside illuminated image sensor, comprising:
 - a light-receiving element disposed in a first substrate;
 - an interlayer insulation layer disposed on the first substrate proximate the light-receiving element;
 - an align key spaced apart from the light-receiving element and passing through the interlayer insulation layer and the first substrate;
 - a plurality of interconnection layers disposed on the interlayer insulation layer in a multi-layered structure, wherein a backside of a backmost interconnection layer of the plurality of interconnection layers is electrically coupled to the align key;
 - a front side passivation layer disposed on a frontmost layer of the plurality of interconnection layers;
 - a backside passivation layer disposed on a backside of the first substrate;
 - a transparent conductive layer disposed on the backside passivation layer proximate the light-receiving element, wherein the transparent conductive layer is electrically coupled to the align key; and

12

a color filter and a microlens disposed on the transparent conductive layer in a region of the first substrate overlying the light-receiving element.

2. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a layer selected from the group consisting of an ITO layer, a ZO layer, an SnO layer, and a ZTO layer.

3. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises an ITO layer, and wherein the ITO layer is doped with an impurity selected from the group of impurities consisting of Co, Ti, W, Mo, and Cr.

4. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a ZO layer, and wherein the ZO layer is doped with an impurity selected from the group of impurities consisting of Mg, Zr, and Li.

5. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer is formed to have a thickness of 10 nm to 500 nm.

6. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a polysilicon layer, a precious metal layer, or both.

7. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a polysilicon layer having a thickness of 1 nm to 40 nm.

8. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a precious metal layer, wherein the precious metal layer includes Au or Pt.

9. The backside illuminated image sensor of claim 1, wherein the transparent conductive layer comprises a precious metal layer having a thickness of 0.1 nm to 1 nm.

10. The backside illuminated image sensor of claim 1, wherein the backside passivation layer comprises a multi-layered structure, and wherein the multi-layered structure includes layers formed from materials having different refractive indexes.

11. The backside illuminated image sensor of claim 1, wherein the backside passivation layer comprises a layer having a lower refractive index than the first substrate.

12. The backside illuminated image sensor of claim 1, wherein the first substrate comprises a p-type conductive material.

13. The backside illuminated image sensor of claim 1, wherein the align key comprises a conductive metal.

14. The backside illuminated image sensor of claim 1, further comprising a second substrate bonded to the front side passivation layer.

15. The backside illuminated image sensor of claim 14, wherein the first substrate and the second substrate each comprise a bulk substrate, an epitaxial substrate, or a silicon-on-insulator (SOI) substrate.

16. The backside illuminated image sensor of claim 1, further comprising a voltage supply configured to provide a negative voltage (−) to the align key.

17. The backside illuminated image sensor of claim 1, further comprising a voltage supply configured to provide a positive voltage (+) to the align key.

18. A backside illuminated image sensor, comprising:
 - a light-receiving element disposed in a substrate;
 - an interconnection layer disposed over a front side of the substrate, wherein the interconnection layer includes a patterned metal layer and a patterned insulating layer;

13

a conductive align key passing through the interconnection layer and the substrate, wherein the conductive align key is electrically coupled to a conductive pad of the patterned metal layer; and

a transparent conductive layer disposed over a backside of the substrate, wherein the transparent conductive layer is electrically coupled to the conductive align key to provide an electrically conductive path between the conductive pad and the transparent conductive layer through the conductive align key.

19. The backside illuminated image sensor of claim 18, wherein the conductive align key extends through the substrate in a position that is laterally displaced from the light-receiving element.

20. The backside illuminated image sensor of claim 18, wherein the interconnection layer comprises a stacked configuration of patterned metal layers and patterned insulating layers.

21. The backside illuminated image sensor of claim 18, wherein the conductive pad is disposed in a backmost patterned metal layer of the interconnection layer.

22. The backside illuminated image sensor of claim 21, further comprising a passivation layer disposed between the backside of the substrate and the transparent conductive layer.

23. The backside illuminated image sensor of claim 18, wherein the transparent conductive layer comprises an ITO layer, and wherein the ITO layer is doped with an impurity selected from the group of impurities consisting of Co, Ti, W, Mo, and Cr.

24. The backside illuminated image sensor of claim 18, wherein the transparent conductive layer comprises a ZO layer, and wherein the ZO layer is doped with an impurity selected from the group of impurities consisting of Mg, Zr, and Li.

25. A backside illuminated image sensor, comprising:
a light-receiving element disposed in a substrate;

14

an interconnection layer disposed over a front side of the substrate, wherein the interconnection layer comprises a patterned metal layer and a patterned insulating layer;

a conductive align key passing through the interconnection layer and the substrate, wherein the conductive align key is electrically coupled to a conductive pad of the patterned metal layer, and wherein the conductive pad is configured to receive a bias voltage; and

a transparent conductive layer disposed over a backside of the substrate, wherein the transparent conductive layer is electrically coupled to the conductive align key and configured to provide the bias voltage to the transparent conductive layer.

26. The backside illuminated image sensor of claim 25, wherein the conductive align key extends through the substrate in a position that is laterally displaced from the light-receiving element.

27. The backside illuminated image sensor of claim 25, wherein the interconnection layer comprises a stacked configuration of patterned metal layers and patterned insulating layers.

28. The backside illuminated image sensor of claim 27, wherein the conductive pad is disposed in a backmost patterned metal layer of the interconnection layer.

29. The backside illuminated image sensor of claim 25, further comprising a passivation layer disposed between the backside of the substrate and the transparent conductive layer.

30. The backside illuminated image sensor of claim 25, wherein the transparent conductive layer comprises an ITO layer, and wherein the ITO layer is doped with an impurity selected from the group of impurities consisting of Co, Ti, W, Mo, and Cr.

31. The backside illuminated image sensor of claim 25, wherein the transparent conductive layer comprises a ZO layer, and wherein the ZO layer is doped with an impurity selected from the group of impurities consisting of Mg, Zr, and Li.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,875,948 B2
APPLICATION NO. : 12/255194
DATED : January 25, 2011
INVENTOR(S) : Hynecek et al.


Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page 2, item (56), under "Other Publications", in Column 1, Line 3, delete "Enery" and insert
-- Energy --.

Title Page 2, item (56), under "Other Publications", in Column 1, Line 6, delete "Relection" and insert
-- Reflection --.

Signed and Sealed this
Seventeenth Day of May, 2011

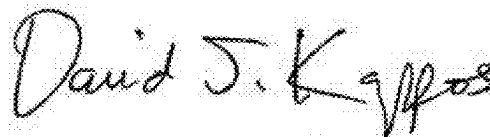A handwritten signature in black ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D" and a stylized "K".

David J. Kappos
Director of the United States Patent and Trademark Office