US006575878B1

(12) **United States Patent**
Choy

(10) **Patent No.: US 6,575,878 B1**
(45) **Date of Patent: Jun. 10, 2003**

(54) **AUTOMATIC SAFETY SHUT-OFF SWITCH FOR EXERCISE EQUIPMENT**

(75) Inventor: **Rick Choy**, Santa Ana, CA (US)

(73) Assignee: **Unisen, Inc.**, Irvine, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/444,276**

(22) Filed: **Nov. 19, 1999**

Related U.S. Application Data

(60) Provisional application No. 60/109,083, filed on Nov. 19, 1998.

(51) **Int. Cl.**[7] **A63B 22/00**
(52) **U.S. Cl.** **482/54**; 482/8; 482/51
(58) **Field of Search** 482/1–9, 51, 54, 482/57, 900–902

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,168,495 A		9/1979	Sweeney	
4,312,033 A		1/1982	Sweeney et al.	
4,353,019 A		10/1982	Sweeney, Jr.	
4,708,337 A		11/1987	Shyu	
4,749,181 A		6/1988	Pittaway et al.	
5,314,391 A		5/1994	Potash et al.	
5,368,532 A	*	11/1994	Farnet	482/5
5,426,504 A		6/1995	Callender	
5,690,587 A		11/1997	Gruenangerl	
5,800,314 A		9/1998	Sakakibara et al.	
5,820,525 A	*	10/1998	Riley	482/54
5,944,635 A	*	8/1999	Butler	482/54
6,042,513 A	*	3/2000	Koteles et al.	482/4
6,087,792 A	*	7/2000	Wang	482/54

* cited by examiner

Primary Examiner—Glenn E. Richman
(74) *Attorney, Agent, or Firm*—Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**

The present invention relates to a safety off switch for a treadmill exercise device. If the treadmill exercise device running belt is still rotating even after user has left the treadmill exercise device, then after a programmed time duration, the treadmill exercise device automatically turns off the running belt and powers itself down. Foot impacts by the user on the running belt create back electromotive forces at the motor which drives the running belt. The foot impacts by the user change the current requirements of the motor by creating pulses in the normally steady current requirements. In one embodiment, the detection of the changes in the number of pulses over a given time interval indicates when the user has left the treadmill exercise device. In another embodiment, signal processing of the changes in the current requirements of the motor with respect to time results in a representation which if below a certain threshold would indicate that the user is no longer using the treadmill exercise device. The conditions met in either embodiment result in, after a programmed time duration, the automatic powering down of the treadmill exercise device.

11 Claims, 3 Drawing Sheets

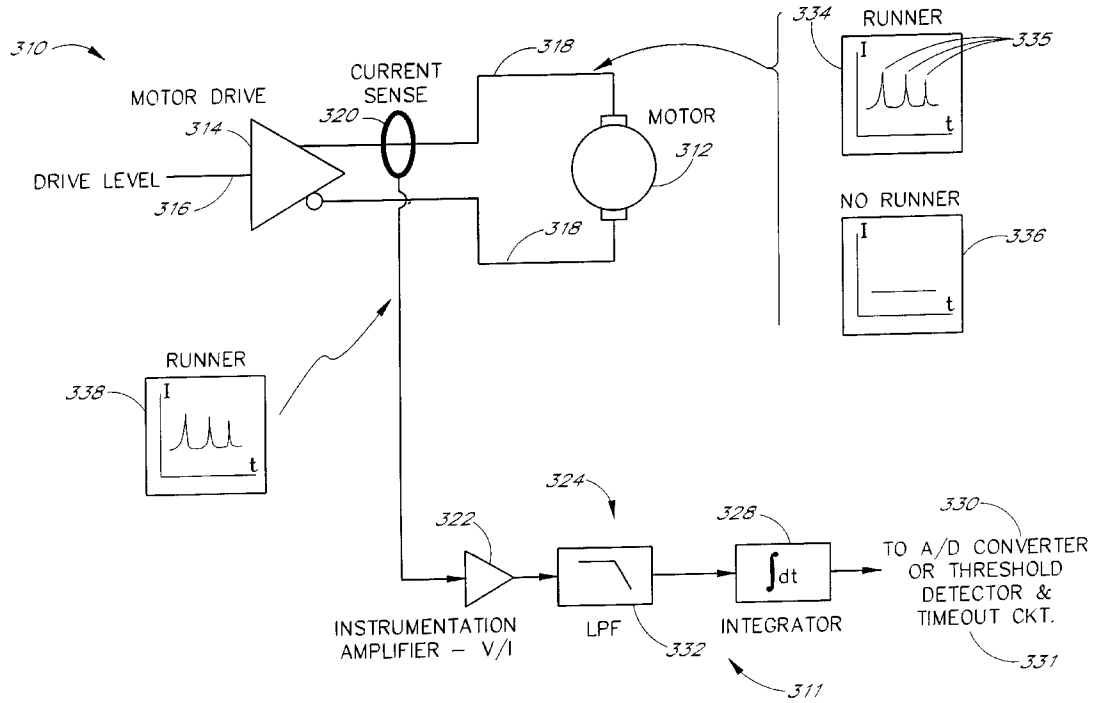

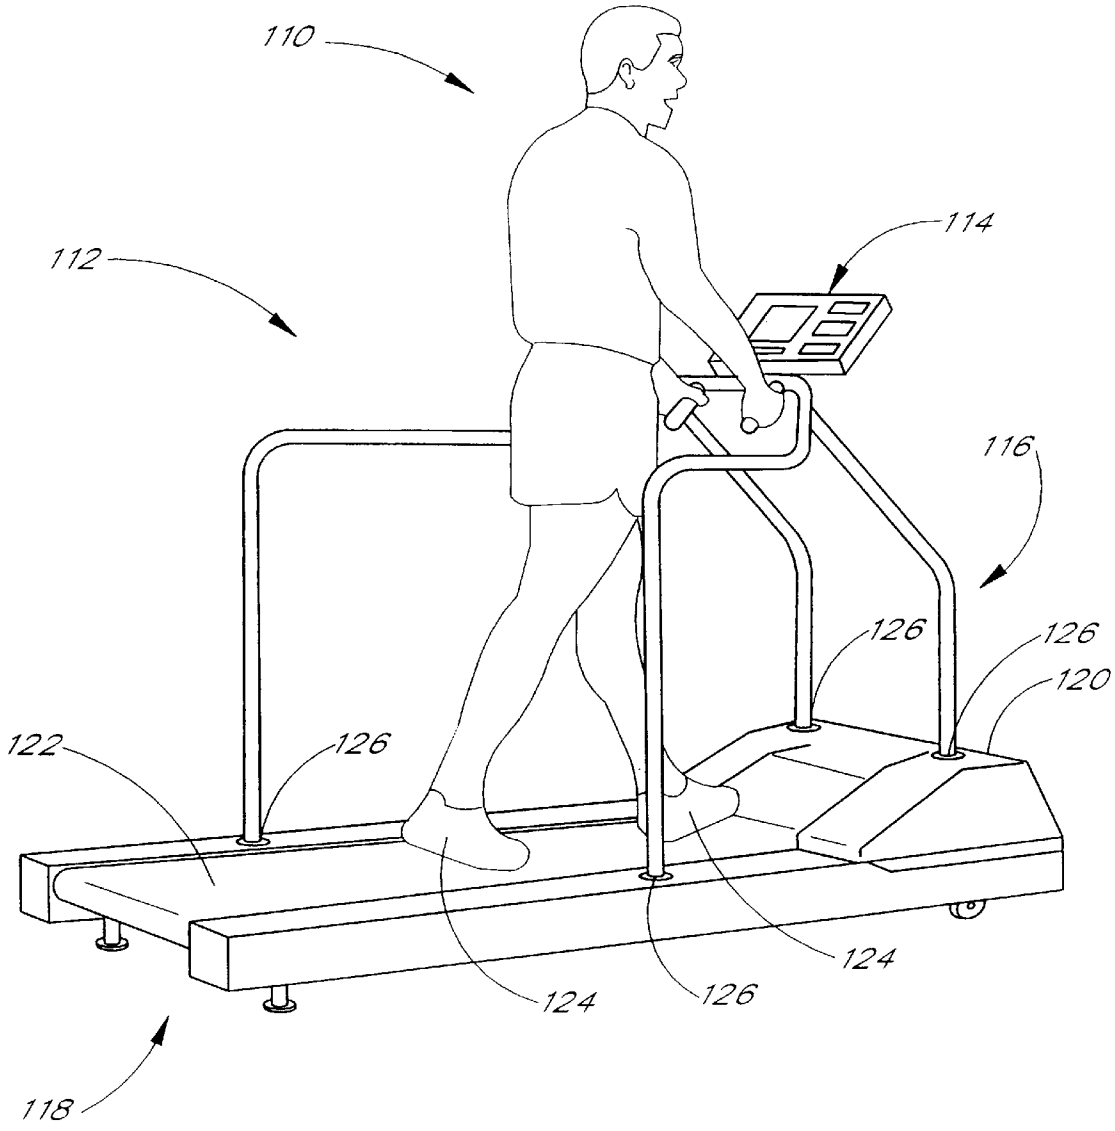

FIG. 1

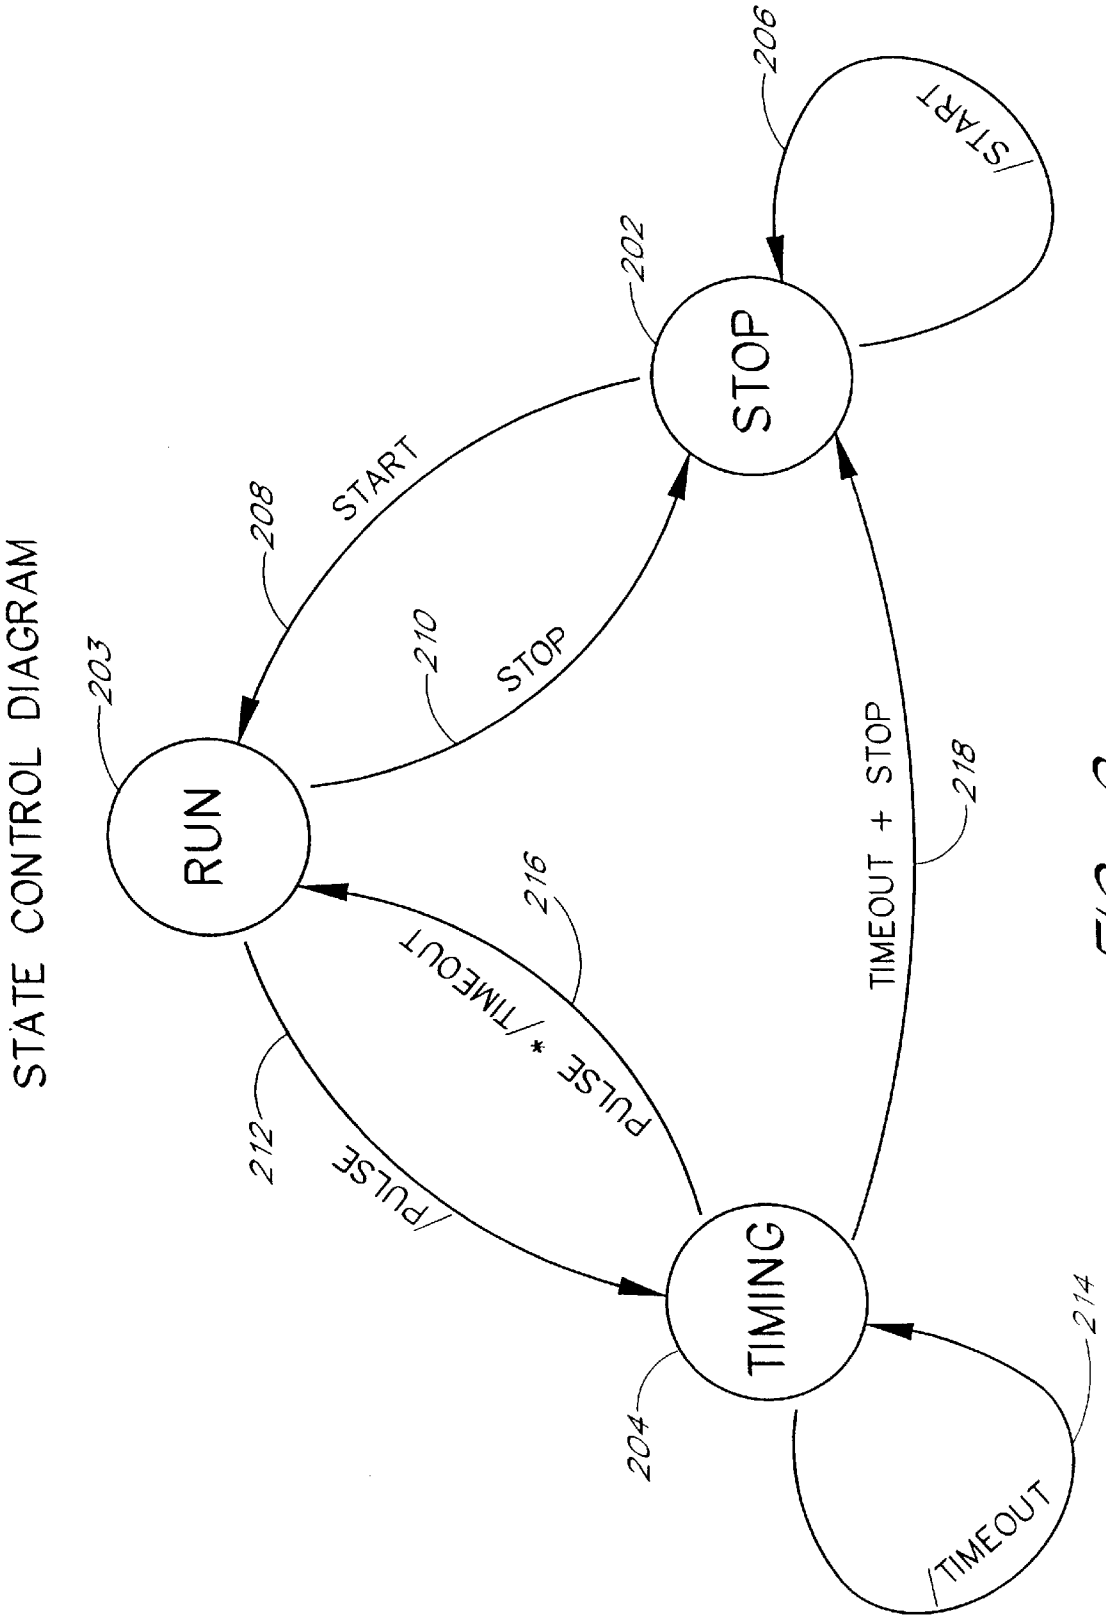
STATE CONTROL DIAGRAM
RUN
203
STOP
202
TIMING
204
START
208
STOP
210
/START
206
PULSE
212
PULSE * /TIMEOUT
216
TIMEOUT + STOP
218
/TIMEOUT
214

FIG. 2

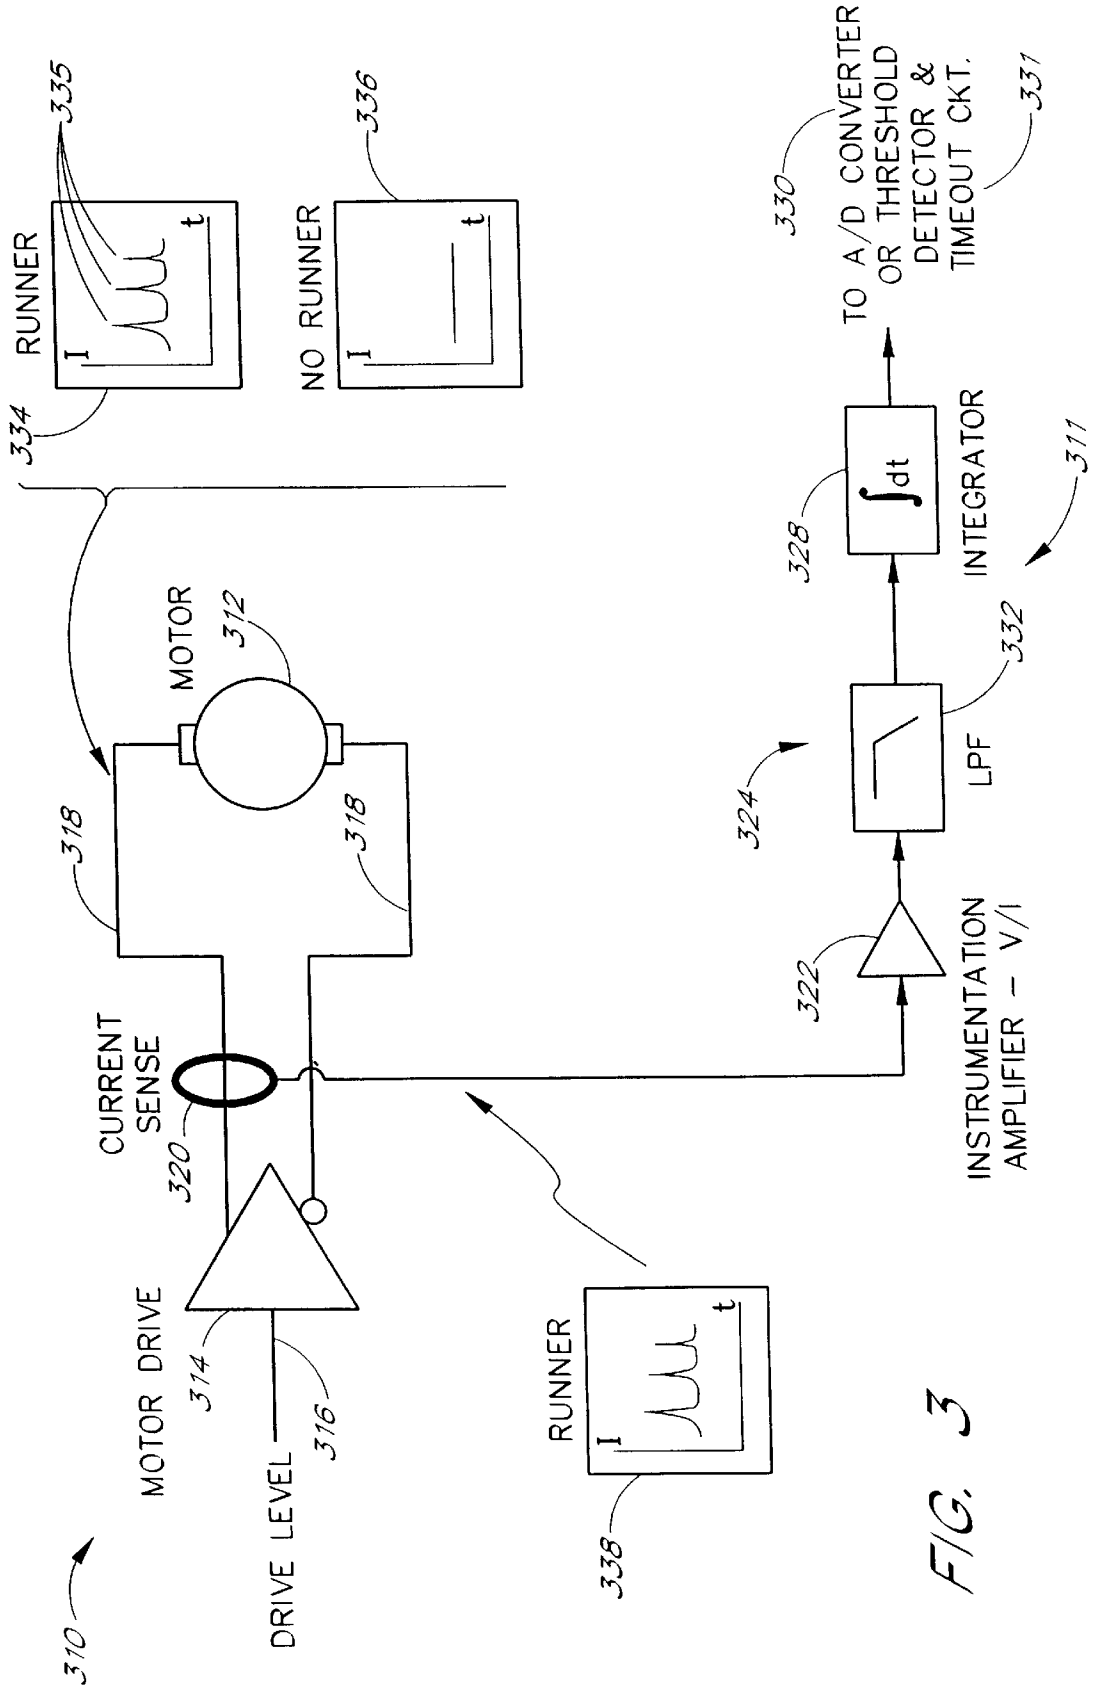
RUNNER
I
t
335
334
NO RUNNER
I
t
336
MOTOR
312
318
318
CURRENT SENSE
320
MOTOR DRIVE
314
DRIVE LEVEL
316
310
RUNNER
I
t
338
INSTRUMENTATION AMPLIFIER – V/I
322
324
LPF
332
INTEGRATOR
328
∫dt
TO A/D CONVERTER OR THRESHOLD DETECTOR & TIMEOUT CKT.
330
331
311

FIG. 3

AUTOMATIC SAFETY SHUT-OFF SWITCH FOR EXERCISE EQUIPMENT

This application claims the benefit of provisional application 60/109,083 filed Nov. 19, 1998.

FIELD OF THE INVENTION

This invention relates to the field of exercise equipment, specifically a motorized treadmill exercise device with an automatic safety shut-off feature.

BACKGROUND OF THE INVENTION

Treadmill exercise devices are an integral part of the habitual, aerobic workouts of a culture focused on health and fitness. In the wake of the popularity of treadmill exercise devices, however, certain concerns arise as to the safe and proper use of treadmill exercise devices. In this regard, it is particularly desirable to prevent a treadmill exercise device from being inadvertently left operating after a user has left the device. This is desirable to conserve energy and also to prevent possible risk of someone getting injured by the moving parts of a treadmill exercise device left running.

A treadmill exercise device that has been left running by a user wastes energy. Especially in a home setting if the user is called away from the treadmill exercise device and forgets that the treadmill exercise device is running, the treadmill exercise device can consume energy for extended durations. In a gymnasium or fitness center, a plurality of treadmill exercise devices if left running when not in use would consume substantial energy.

SUMMARY OF THE INVENTION

What is needed is a system and method for automatically powering down the treadmill exercise device when the user has left the treadmill. Accordingly, safety for future users would be enhanced if the treadmill exercise device had the capability of sensing when the previous user has left the treadmill exercise device so that the treadmill exercise device can subsequently, automatically power itself down for future users.

The present invention provides a treadmill comprising a motor and a control panel including control circuitry. The control panel is adapted to monitor and control the motor. The circuitry is adapted to automatically power down the control panel and the motor when the circuitry has sensed a threshold change in an electrical perturbation from the motor during a time duration.

The present invention also provides a treadmill exercise device comprising means for determining when the treadmill exercise device is not being used and means responsive thereto for automatically powering down the treadmill exercise device.

The present invention also provides an exercise device comprising a motor and current detection circuitry coupled to the motor. The circuitry is adapted to sense when no one is using the exercise device based upon changes with respect to time in the current supplied to the motor.

In one embodiment, the current detection circuitry comprises a current sensor for detecting changes in current with respect to time, an amplifier coupled to the current sensor, a filter coupled to the amplifier, and an integrator coupled to the filter.

In other advantageous embodiments of the exercise device, the filter is a low pass filter or a bandpass filter. Furthermore, the filter may be digital or analog. In still other embodiments, the amplifier transforms and amplifies current signals into voltage signals.

In another embodiment, the exercise device further comprises an analog-to-digital converter coupled to the integrator. In yet another embodiment, the exercise device further comprises a threshold detector coupled to the integrator and a timeout circuit coupled to the threshold detector. Optionally, the timeout circuit may comprise a resetable programmable counter.

The present invention, in another embodiment, provides a method for automatically switching off a rotating running belt in a treadmill exercise device when no one is using it, comprising the steps of sensing a threshold change in electrical perturbations from a motor in the treadmill exercise device during a first time duration and automatically powering down the treadmill exercise device after a second time duration if electrical perturbations are not detected.

The present invention also provides, in another embodiment, a method for automatically powering down an exercise device when no one is using the exercise device, comprising the step of detecting changes with respect to time in current supplied to a motor. In another embodiment, the step of detecting changes comprises the step of inducing a current signal in a current detection circuit. In yet another embodiment, in addition to the step of the previous embodiment, the method further comprises the steps of amplifying the current signal, transforming the current signal into a voltage signal, filtering the voltage signal, and integrating the voltage signal with respect to time.

Other advantageous embodiments for automatically powering down the exercise device when no one is using the exercise device include the step of filtering by passing low frequencies. Another embodiment includes the step of filtering by filtering low frequencies and filtering high frequencies.

In addition, another advantageous embodiment comprises the steps of comparing the integrated voltage signal value with a threshold value, enabling a timeout circuit, and automatically powering down the exercise device. Furthermore, in yet another embodiment, the step of enabling comprises the step of resetting the timeout circuit. Moreover, in another embodiment, the step of enabling comprises the step of enabling and resetting a resetable counter programmed for a time duration.

The present invention also provides a method for automatically detecting changes in current with respect to time comprising the steps of inducing a current signal in a current sensor, amplifying the current signal, transforming the current signal into a voltage signal, filtering the voltage signal, and integrating the voltage signal.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is described in more detail below in connection with the attached drawing figures in which:

FIG. **1** illustrates an user using a treadmill exercise device;

FIG. **2** illustrates a state diagram for the treadmill exercise device; and

FIG. **3** illustrates a block diagram for a motor control system and a current detection system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

One preferred embodiment of the present invention provides circuitry for sensing when a user has left the treadmill

exercise device by detecting the absence of perturbations in the current supplied to the motor. The circuitry automatically powers down the treadmill exercise device when no user motion is sensed.

FIG. **1** illustrates a user **110** walking, jogging or running on a treadmill exercise device **112** in accordance with one embodiment of the present invention. The treadmill exercise device **112** comprises a control panel **114**, a support structure **116**, and a base **118** with support structure vias **126**. The support structure **116** is mounted to the top of the base **118** at the support structure vias **126**. The control panel **114** is mounted on top of the support structure **116**. The user **110** is supported on top on the base **118**. The user **110** may also grip part of the support structure **116** for added stability.

The base **118** further comprises a housing **120**, a running belt **122**, a running deck (not shown), and a motor (not shown). The housing **120** houses the motor which is coupled to the running belt **122**. The running deck is positioned on top of the housing **120** and supports the user **110** and the running belt **122**. The running belt **122** is positioned on top of and below the running deck and is supported by rollers or other means (not shown).

The control panel **114** preferably includes circuitry (not shown) adapted to monitor and control the motor. Of course, the exact location of the circuitry is not particularly important and all or part of the circuitry may be located elsewhere in the treadmill exercise device **112**. The circuitry is in electrical communication with the motor such as through the support structure **116**. In one embodiment, the support structure **116** comprises hollow tubing adapted to provide support to the user **110** and also to house electrical wiring. The electrical wiring provides electrical communication between the circuitry of the control panel **114** and the motor in the base **118**.

In operation, the user **110** approaches the treadmill exercise device **112** and steps onto the running belt **122**, supported by the running deck, the user being at an optimal distance, as determined by the user **110**, from the control panel **114**. The user **110** then programs the control panel **114** by entering information such as the weight of the user **110** and the speed at which the user **110** wishes to walk, jog or run. The control panel **114** processes the information and uses control circuitry to start the motor. The motor causes the running belt **122** to rotate around the running deck and through the housing **120**.

As the running belt **122** rotates, the user **110** takes strides at a rate commensurate with the speed of the running belt **122**. During each stride, a foot **124** of the user **110** creates an impact on the running belt **122** which is a function of the weight of the user **110**. Accordingly, the running belt **122** is forced into greater contact with the running deck resulting in an increased frictional force which appears at the motor in the form of a torque disturbance. The frictional force is a function of the weight of the user **110** and the effective coefficient of friction between the running belt **122** and the running deck. The torque disturbance impresses an electrical perturbation in the form of a back electromotive force in the motor which is sensed by the circuitry in the control panel **114** which is in electrical communication with the motor.

Thus, an approximately periodic rate of foot impacts by the user **100** who may be walking, jogging or running, creates an electrical signal reflecting the approximately periodic electrical perturbations. This signal is monitored by the circuitry in the control panel **114**. If the user **110** falls or leaves the running belt **122** while the running belt **122** is still rotating, the circuitry will no longer sense the electrical perturbations caused by the user **110**.

In one embodiment, if the amplitude of the signal reflecting the electrical perturbation stays below a threshold value during a first period of time, then the circuitry will, after a second period of time, automatically power down the motor and/or the control panel **114**. In such an embodiment, a threshold value must be set or determined in which the circuit distinguishes between the electrical signal reflecting the electrical perturbation caused by a user and the electrical signal reflecting electrical noise. One alternative is to set the threshold value equal to a multiple of, e.g. two, three or four times, the average electrical noise signal. Another alternative is to set the threshold value as a function of the weight of the user **110**. One such alternative might set the threshold value to, for example, fifty percent of the peak amplitude of the signal reflecting the electrical perturbation created by a user **110** of the programmed or default weight.

In such an embodiment, the first period of time must be either determined or arbitrarily set. One alternative for determining the first period of time is to make the period a function of the programmed or actual speed of the running belt **122**. In such an alternative, a slower moving running belt **122** would need a longer first period of time than a faster moving running belt **122**. Likewise, the first period of time can be a multiple of the period of time required for the running belt **122** to make one full rotation. In the aforementioned embodiment, the second period of time can be set by the manufacturer.

In another embodiment, the signal reflecting the electrical perturbation is processed by the circuitry to produce a value which is compared to another threshold value. If the processed signal values stay below a threshold value during a first period of time, then the circuitry will, after a second period of time, automatically power down the motor and the control panel **114**. In this embodiment, the first and second periods of time can be determined as previously discussed for other embodiments and alternatives.

In one alternative, the signal reflecting the electrical perturbation is integrated over a time duration to produce the value. The time duration over which the signal is integrated can be set by the manufacturer as a default time duration or can be a function of the actual or programmed speed of the running belt **122**. Alternatively, the time duration can be a function of the average of the last, for example, three time intervals between electrical perturbations or foot impacts. The time duration can be variable or constant, but should preferably be at least long enough such that the time duration encompasses the time interval between foot impacts when the user **110** has slowed from a run down, in which short time durations are needed, to a slow walk, in which long time durations are needed.

FIG. **2** is a state diagram illustrating the operation of the treadmill exercise device **112** in accordance with one embodiment of the present invention. The three states **202–204** illustrated by FIG. **2** are STOP, RUN and TIMING, respectively. The STOP state **202** indicates that the running belt is not moving. As indicated by "/Start" **206**, until a start process is completed, the treadmill exercise device remains in the STOP state **202**. In one embodiment, the start process includes programming the control panel **114** through a user interface to control and manipulate the motor in the base **120** in order to get the running belt **122** moving. Once the start process is completed **208**, the treadmill exercise device **112** moves into the next state, the RUN state **203**.

In the RUN state **203**, the running belt **122** is moving across the running deck. The treadmill exercise device **112** can move from a RUN state **203** back to a STOP state **202**

if a stop process **210** is completed. In one embodiment, the stop process includes programming the control panel **114** by the user **110** through a user interface. The treadmill exercise device **110** moves from the RUN state **203** into the TIMING state **204** once the pulse process is in progress **212**. In one embodiment, the pulse process includes detecting a certain number of pulses representing the electrical perturbations within a first period of time. In another embodiment, the pulse process includes processing electrical signals from the motor and comparing the processed signal values to one or more threshold values over a first period of time.

In the TIMING state **204**, a timer counts out a preset time interval, shown as a timeout process in FIG. **2**. While the treadmill exercise device is in the timeout process **214**, the treadmill exercise device **112** remains in the TIMING state **204**. Should the pulse process be completed during the timeout process **216**, then the treadmill exercise device **112** would return back to the RUN state **203**. In one embodiment, the successful completion of the pulse process before the end of the timeout process **216** indicates that the user **110** is still walking, jogging or running. However, should the timeout process be completed before the completion of the pulse process **218**, then the treadmill exercise device **112** would move into the STOP state **202**. In one embodiment, the completion of the timeout process **218** before the completion of the pulse process indicates that the user **110** has left the treadmill exercise device **112**. A transition from the TIMING state **204** to the STOP state **203** may also be achieved if the stop process **218** is completed.

FIG. **3** illustrates a simplified, schematic block diagram of a motor control system **310** and a current detection system **311** in accordance with one embodiment of the present invention. The current detection system **311** is coupled to the motor control system **310**.

The motor control system **310** comprises a motor drive **314**, a drive level line **316**, and a plurality of connection lines **318**. The drive level line **316** is in electrical communication with an input to the motor drive **314**. In one embodiment, the drive level input line **316** is in electrical communication with circuitry located in the control panel **114**. The motor drive **314** is in electrical communication with the motor **312** through the connection lines **318**.

The current detection system **311** comprises a current sensor **320**, an amplifier **322**, a filter **324** and an integrator **328**. The current sensor **320** is coupled to an input of the amplifier **322**. In one embodiment, the current sensor **320** comprises a ring or a coil. Furthermore, the current sensor **320** is positioned around and coupled to the power connection line **318** of the motor control system **310**. The output of the amplifier **322** is coupled to an input of the filter **324**. In one embodiment, the filter **324** is a low pass filter **332** which can be digital or analog. The output of the filter **324** is coupled to an input of the integrator **328**. The output of the integrator **328** is coupled to an analog-to-digital converter or to a threshold detector and timeout circuit **330**.

The general use and operation of the motor control system **310** and the current detection system **311** will now be described with reference to FIG. **3**. The user **110** initially approaches the treadmill exercise device **112** and steps onto the running belt **122** in front of the control panel **114**. The user **110** then programs the control panel **114** by entering information such as the weight of the user **110** and the speed at which the user **110** wishes to walk, jog or run. The circuitry inside the control panel **114** processes the information and raises the drive level line **316** to a calibrated current level corresponding to the amount of current that will be required by the motor **312**. The motor drive **314** amplifies the current from the drive level line **316** and provides an amplified current to the connection lines **318** which ultimately is received by the motor **312**. The motor **312** uses the amplified current and begins to rotate. This rotational energy is translated and reflected through gear and rollers (not shown) which ultimately rotate the running belt **122**. Thus, the magnitude of the current placed on the drive level line **316** by the circuitry of the control panel **114** controls the rotational speed of the running belt **122**.

When the user **110** is walking, jogging or running on the treadmill exercise device **112**, each foot impact on the running belt **122** of the treadmill exercise device **112** causes an increase in the frictional force that is a function of the weight of the user **110** and the effective coefficient of friction between the running deck and the running belt **122**. The frictional force is applied to the treadmill exercise device **112** during each foot impact and results in a back electromotive force at the motor **312**. Accordingly, the motor **312** must work harder and, thus, consume more power to keep the running belt **122** moving at the same rate. The greater power consumption of the motor **312** corresponds to the increased current required by the motor **312** which is provided through the motor drive **314**.

During each foot impact by the user **110**, the current requirements of the motor **312** increase which may be represented as a pulse **335** in a plot **334** of current verses time. When foot impacts are absent from the running belt **122**, then a plot **336** of the current requirements of the motor does not have pulses **335**. Thus, the pulses **335** are superimposed on the plot **336** to create the plot **334** of the overall current requirements of the motor **312** with respect to time.

The pulses **335** are changes in current with respect to time and cause changes in the magnetic flux with respect to time around the connection lines **318** carrying the current pulses. These changes in magnetic flux with respect to time are detected in the current sensor **320** creating an induced electromotive force and accompanying induced current signal in the current detection system **311**. Accordingly, the current pulses in the motor control system **310** induce current pulses which form a current signal in the current detection system **311** as illustrated in plot **338**.

The current signal propagates to the amplifier **322**. In one embodiment, the amplifier **322** is a transresistance amplifier which means that the input current signal is amplified and transformed into an output voltage signal. The output voltage signal, in one embodiment, propagates through a low pass filter **332** which may be digital or analog. The low pass filter **332** removes unwanted noise. The filter **324** is low pass since the range of foot-impact frequencies occurs at relatively low frequencies. The cutoff frequency of the low pass filter **332** should be determined so that the foot-impact frequency range passes through the filter **332**, but high frequency noise is removed from the signal. Another embodiment uses a bandpass filter to remove high and low frequency noise components without significant attenuation in the frequency range at which foot impacts occur.

The filtered voltage signal is then integrated by the integrator **328**. The integrator periodically integrates the filtered voltage signal over a predetermined time duration. This time duration may be set by the manufacturer as a default time duration or can be a function of the actual or programmed speed of the running belt **122**. Other alternatives for determining the time duration were discussed above. An output signal from the integrator **328** represents an integration of the filtered voltage signal over the previous

period of time in length equal to the time duration. Thus, the more foot impacts in a given time duration by the same user, then the larger the output signal from the integrator **328**.

The signal can then be digitized by the analog-to-digital converter **330** as in one embodiment or sent directly to the threshold detector and timeout circuit **331** as in another embodiment. The threshold detector determines whether the output signal from the integrator **328** has dropped below a threshold value at which point the timeout circuit such as a resetable programmable counter is activated. The threshold value should preferably be set such that the threshold detector can distinguish between values from integrating signals containing noise and values from integrating signals containing pulses. In one alternative, the threshold value may factor in the weight or some other characteristic of the user **110** since a heavier user **110** would create greater pulses and thus larger output signals from the integrator **328**. In another alternative, the threshold value may also be a multiple of the value of the output signal from the integrator **328** when no foot impacts fall on the rotating running belt **122**.

After the user **110** has stepped off the running belt **122** for a period of time, the output signal from the integrator **328** will drop below the threshold value. In one embodiment, the threshold detector then resets and enables the resetable programmable counter which then counts toward a programmed number representing a programmed time duration. If during the preset time duration of the counter, the output signal from the integrator **328** rises above the threshold value, as is the case when foot impacts from the user **112** commence again, then the threshold detector disables the resetable programmable counter. Accordingly, if the output signal from the integrator **328** again drops below the threshold value, the threshold detector would reset and enable the counter. If the counter reaches its programmed number representing the end of the programmed time duration, then the treadmill exercise device **112** automatically powers itself down.

Although the foregoing invention has been described in terms of certain preferred embodiments, other embodiments will become apparent to those of ordinary skill in the art in view of the disclosure herein. Accordingly, the present invention is not intended to be limited by the recitation of preferred embodiments, but is intended to be defined solely by reference to the appended claims.

What is claimed is:

1. A treadmill comprising:

a motor; and

control circuitry adapted to monitor and control the motor, said circuitry adapted to automatically power down the control panel and the motor when said circuitry has sensed a threshold change in electrical perturbations from the motor during a time duration.

2. A treadmill exercise device comprising means for determining when the treadmill exercise device is not being used and means for automatically powering down the treadmill exercise device when the treadmill exercise device is not being used.

3. An exercise device comprising:

a motor; and

current detection circuitry coupled to the motor, said circuitry adapted to sense when no one is using the exercise device based upon changes with respect to time in the current supplied to the motor.

4. The exercise device of claim **3**, wherein the current detection circuitry comprises:

a current sensor for detecting changes in current with respect to time; an amplifier coupled to said current sensor;

a filter coupled to said amplifier; and

an integrator coupled to said filter.

5. The exercise device of claim **4**, further comprising an analog-to-digital converter coupled to said integrator.

6. The exercise device of claim **4**, further comprising a threshold detector coupled to said integrator and a timeout circuit coupled to said threshold detector.

7. The exercise device of claim **6**, wherein said timeout circuit comprises a resetable programmable counter.

8. The exercise device of claim **4**, wherein said filter is a low pass filter.

9. The exercise device of claim **4**, wherein said filter comprises a bandpass filter.

10. The exercise device of claim **4**, wherein said filter is a digital filter.

11. The exercise device of claim **4**, wherein said amplifier transforms and amplifies current signals into voltage signals.

* * * * *