US010568447B2

(12) **United States Patent**
Miksovsky et al.

(10) **Patent No.: US 10,568,447 B2**
(45) **Date of Patent: Feb. 25, 2020**

(54) **EATING UTENSIL SYSTEM**

(71) Applicant: **humangear, Inc.**, San Francisco, CA (US)

(72) Inventors: **Christopher A. Miksovsky**, San Francisco, CA (US); **Clint N. Slone**, San Francisco, CA (US); **Evelyne Chaubert**, San Francisco, CA (US); **Charlie Nghiem**, Oakland, CA (US); **Robert Charles Lane**, Larkspur, CA (US); **Jonathan Paul Downing**, Belmont, CA (US)

(73) Assignee: **humangear, Inc.**, San Francisco, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/213,536**

(22) Filed: **Dec. 7, 2018**

(65) **Prior Publication Data**

US 2019/0104873 A1 Apr. 11, 2019

Related U.S. Application Data

(62) Division of application No. 15/268,175, filed on Sep. 16, 2016, now abandoned, which is a division of (Continued)

(51) **Int. Cl.**
A47G 21/06 (2006.01)
A47G 21/02 (2006.01)
A47G 21/04 (2006.01)

(52) **U.S. Cl.**
CPC ***A47G 21/06*** (2013.01); ***A47G 21/023*** (2013.01); ***A47G 21/04*** (2013.01)

(58) **Field of Classification Search**
CPC A47G 21/06; A47G 21/065; A47G 21/04; A47G 21/023
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

32,916 A * 7/1861 Richards A47G 21/06 30/147
33,703 A * 11/1861 Hardie A47G 21/06 30/147
(Continued)

FOREIGN PATENT DOCUMENTS

CN 2231889 7/1996
CN 2373000 4/2000
(Continued)

OTHER PUBLICATIONS


Light My Fire Spork Medium BPA-Free Tritan Spork with Full-Sized Spoon, Fork and Serrated Knife Edge, Dec. 2, 2009; https://www.amazon.com/Light-Fire-BPA-Free-Full-Sized-Serrated/dp/B00B5A2YX0/ref=sr_1_2_sspa?ie=UTF8&qid=1544804816&sr=8-2-spons&keywords=light+my+fire+spork&psc=1.*
(Continued)


Primary Examiner — Jason Daniel Prone
(74) *Attorney, Agent, or Firm* — Beyer Law Group LLP

(57) **ABSTRACT**

A combination spoon and fork system capable of being stored in a nested configuration or used as a combination eating utensil with the spoon and fork connected end to end. An interlocking mechanism can interlock the spoon and fork in either the nested position or in the end to end configuration. The interlocking system allows the handle of the spoon to slide between rails on the handle of the fork and to snap and lock the spoon in place either nested with the fork or end to end with the fork to form an elongated combination eating utensil. The spoon and fork of the system can also be used separately from one another.

21 Claims, 24 Drawing Sheets

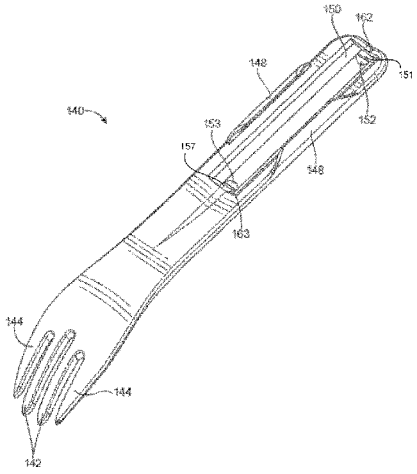

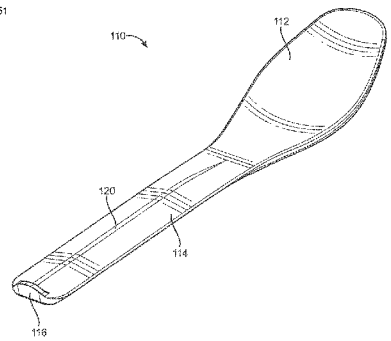

Related U.S. Application Data

application No. 14/204,497, filed on Mar. 11, 2014, now Pat. No. 9,468,321.

(58) **Field of Classification Search**
USPC 30/147–150, 322–328; D7/643, 644, 653
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

34,069	A		1/1862	Neill	
34,098	A		1/1862	Hardie et al.	
34,712	A	*	3/1862	Cables	B26B 11/00 30/147
46,832	A	*	3/1865	Thorne	B26B 11/00 30/148
88,370	A	*	3/1869	Cox	A47G 21/08 30/148
RE7,925	E		10/1877	Ulmer	
RE9,687	E		5/1881	Cox	
398,264	A	*	2/1889	Kisner	A47G 21/06 30/150
D30,129	S		2/1899	Whitcomb et al.	
D31,575	S		10/1899	Phillips et al.	
671,740	A		4/1901	Wattne	
675,475	A		6/1901	Glover	
812,424	A		2/1906	Hellmuth	
849,098	A		4/1907	Aufrichtig	
854,745	A	*	5/1907	King	A47G 21/02 30/150
870,413	A	*	11/1907	Brown	B26B 11/00 30/148
972,777	A	*	10/1910	Richardson	A47G 21/06 30/147
1,053,387	A	*	2/1913	Hawley	A47G 21/06 30/147
1,229,696	A	*	6/1917	Woods	B26B 11/00 30/147
1,271,679	A		7/1918	Duckett	
1,277,205	A		8/1918	Evans	
D53,165	S		4/1919	Janosik	
1,337,174	A	*	4/1920	Whyte	A47G 21/06 30/150
1,348,762	A		8/1920	Suzuki	
1,372,325	A		3/1921	Willemin	
D59,869	S		11/1921	Quandee et al.	
D60,369	S		2/1922	Quandee et al.	
1,425,750	A	*	8/1922	Crawford	A47G 21/06 30/148
1,452,337	A	*	4/1923	Brecel	A47G 21/06 30/147
D63,047	S		9/1923	Adler	
1,699,248	A		1/1929	Pasal	
1,868,289	A		7/1932	Leidel	
D93,956	S		11/1934	Wilson	
1,984,081	A		12/1934	Pisculli	
2,010,074	A		8/1935	Fuerst	
2,109,016	A		2/1938	Ringer	
2,251,842	A		8/1941	Hill	
2,318,129	A	*	5/1943	Torode	A47G 21/06 30/147
D143,431	S		1/1946	Lapin	
2,439,882	A		4/1948	Beddow	
2,470,492	A	*	5/1949	Jenkins	A47G 21/06 30/147
2,505,122	A		4/1950	Krieger, Jr.	
D149,920	S		8/1950	Pavlinetz	
2,542,600	A		2/1951	Vaccarezza	
2,610,400	A		9/1952	Wendling	
2,752,678	A	*	7/1956	Welch	A47G 21/04 30/324
D184,317	S		1/1959	McArthur	
3,014,277	A	*	12/1961	Geckler	A47G 21/04 30/324
3,121,951	A		2/1964	Green	
3,138,871	A		6/1964	Sears	
D199,630	S		11/1964	Dedic, Sr.	
D209,704	S		12/1967	Siune et al.	
D210,549	S		3/1968	O'Brien	
3,586,161	A		6/1971	Fong et al.	
3,596,965	A		8/1971	Woofter	
3,630,249	A		12/1971	Brunwin	
3,771,224	A	*	11/1973	Bono, Jr.	A47G 21/02 30/148
3,967,376	A		7/1976	Foley	
D241,302	S		9/1976	Scigliano	
3,991,466	A		11/1976	Smith	
D249,926	S		10/1978	Wong	
4,317,284	A	*	3/1982	Prindle	A47G 21/06 30/147
4,377,035	A	*	3/1983	Dalichow	A47G 21/06 30/147
D269,060	S		5/1983	Creamer	
4,425,711	A		1/1984	Wood et al.	
4,524,512	A		6/1985	Formo et al.	
D284,442	S		7/1986	Chan	
4,615,120	A		10/1986	Newman	
4,625,404	A		12/1986	Valente et al.	
4,771,541	A		9/1988	Bouchakian	
4,835,864	A		6/1989	Tang	
4,984,367	A		1/1991	Albanese	
4,995,154	A	*	2/1991	Bamber	A47G 21/06 30/147
D318,300	S		7/1991	Lillelund et al.	
D318,600	S	*	7/1991	Lillelund	D7/643
D325,855	S		5/1992	Rea, Sr.	
5,197,623	A		3/1993	Wang	
D342,422	S	*	12/1993	Sanford	D7/643
D347,975	S		6/1994	Zeller	
5,327,650	A	*	7/1994	Rojas	A47G 21/06 30/147
D362,160	S		9/1995	Brabeck et al.	
5,542,181	A		8/1996	Gaylord	
D376,514	S		12/1996	Torkelson	
D388,664	S		1/1998	Gagnon et al.	
D391,123	S		2/1998	Rey et al.	
5,735,050	A		4/1998	Hsieh	
D396,613	S		8/1998	Cousins	
D401,481	S		11/1998	Boilard et al.	
5,845,403	A	*	12/1998	Nivin	A47G 21/06 30/147
5,904,250	A		5/1999	De Schutter	
D412,813	S		8/1999	Roskind et al.	
5,940,974	A		8/1999	Lee	
D414,988	S	*	10/1999	Santini	30/150
6,145,204	A		11/2000	Cash	
6,151,999	A	*	11/2000	Eklind	B25B 13/56 7/138
6,463,662	B1		10/2002	Coscia et al.	
6,647,828	B2		11/2003	Hakim	
D491,419	S		6/2004	White et al.	
D509,708	S	*	9/2005	Schmidt	D7/645
7,013,568	B2	*	3/2006	Schmidt	A47G 21/06 30/147
D530,985	S		10/2006	Evans	
D530,986	S	*	10/2006	Lago-Arenas	D7/645
D533,034	S	*	12/2006	Wasserman	D7/653
D535,857	S		1/2007	Bristow	
D536,221	S		2/2007	Kamins	
D536,222	S	*	2/2007	Heiberg	D7/645
D537,302	S		2/2007	Vrhovski	
D554,951	S		11/2007	McGrath	
D563,737	S		3/2008	Shane-Schuldt	
D575,593	S	*	8/2008	Svartstrom	D7/644
D587,075	S		2/2009	Dibnah et al.	
D608,602	S	*	1/2010	Davies	D7/644
D609,060	S		2/2010	Pallotto	
D612,692	S		3/2010	Menceles	
D617,156	S		6/2010	Griffith	
D618,070	S		6/2010	Jalet et al.	
D625,153	S	*	10/2010	Gallop	D7/642
7,816,634	B1		10/2010	Guide, Jr. et al.	

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,856,722	B2 *	12/2010	Lago-Arenas	A47G 21/06 30/147
D633,344	S	3/2011	Nordwall	
D637,309	S	5/2011	Park	
D656,799	S	4/2012	Lebeau	
8,296,957	B2	10/2012	Muehlemann	
D673,431	S	1/2013	Glavin et al.	
D676,286	S	2/2013	Lion et al.	
D686,045	S	7/2013	Stewart et al.	
D690,156	S	9/2013	Apple et al.	
8,635,780	B1	1/2014	Abul	
8,689,453	B2	4/2014	Vogan	
D705,020	S	5/2014	Fraser et al.	
8,726,525	B2	5/2014	Bagley et al.	
D706,586	S	6/2014	Kestenbaum	
8,839,522	B2 *	9/2014	Walters	A47G 21/06 30/322
D718,093	S	11/2014	Miksovsky et al.	
D722,837	S *	2/2015	Miksovsky	D7/643
D730,049	S	5/2015	Miksovsky et al.	
9,061,429	B2 *	6/2015	Barber	A47J 43/288
D739,685	S *	9/2015	Miksovsky	D7/653
D740,079	S	10/2015	Miksovsky et al.	
D745,339	S	12/2015	Cetti	
D746,644	S	1/2016	Cai	
D747,159	S *	1/2016	Frost	D7/643
D752,918	S	4/2016	Katopis	
D753,447	S *	4/2016	Busboom	D7/642
D756,171	S *	5/2016	Mou	D7/653
D756,172	S *	5/2016	Mou	D7/653
D758,808	S *	6/2016	Gatewood	D7/643
9,434,590	B2 *	9/2016	Miksovsky	B67B 7/44
9,468,321	B2 *	10/2016	Miksovsky	A47G 21/06
9,549,626	B2	1/2017	Truog et al.	
D782,254	S	3/2017	Joseph	
D794,400	S *	8/2017	Young	D7/643
D807,127	S *	1/2018	Levi	D7/644
D812,994	S	3/2018	Mundhra	
D812,995	S	3/2018	Mundhra	
D813,616	S *	3/2018	Mundhra	D7/643
D816,432	S	5/2018	Huang	
D825,104	S	8/2018	Simard et al.	
D828,730	S	9/2018	Gauss et al.	
D834,887	S	12/2018	Miksovsky et al.	
D842,662	S *	3/2019	Bloch	D7/643
2003/0029044	A1	2/2003	Mattson et al.	
2003/0110644	A1 *	6/2003	Miller	A47G 21/02 30/322
2005/0066531	A1	3/2005	Hougland	
2005/0155229	A1	7/2005	Lee	
2006/0248732	A1	11/2006	Straube	
2007/0084063	A1	4/2007	Hughes	
2007/0124943	A1	6/2007	Hougland	
2007/0251103	A1	11/2007	Rhodes, III	
2008/0000092	A1	1/2008	Vanguard	
2008/0016698	A1	1/2008	Simpson	
2008/0148575	A1	6/2008	Chan	
2008/0256807	A1	10/2008	Kirkup	
2009/0172949	A1	7/2009	Watts	
2009/0205209	A1	8/2009	Tovar	
2009/0293283	A1 *	12/2009	Hsu	A47G 21/02 30/149
2010/0206885	A1	8/2010	Bowden et al.	
2010/0218382	A1	9/2010	Scott	
2011/0091521	A1	4/2011	Omelchenko	
2012/0036724	A1	2/2012	Walters	
2012/0297628	A1	11/2012	Rayko et al.	
2013/0152406	A1	6/2013	McFarland	
2014/0026425	A1	1/2014	Kim	
2015/0014329	A1	1/2015	Konopatsky	
2015/0257562	A1	9/2015	Miksovsky et al.	
2017/0000276	A1 *	1/2017	Miksovsky	A47G 21/06
2019/0110620	A1 *	4/2019	Miksovsky	A47G 21/06

FOREIGN PATENT DOCUMENTS

CN	200945058	9/2007
CN	201691585	1/2011
CN	102068177	5/2011
CN	202234496	5/2012
CN	202874843	4/2013
CN	203424719	2/2014
DE	44 17 037	12/1998
EP	0 129 495	12/1984
GB	22788	9/1915
GB	1337613	11/1973
WO	WO 2013/095407	6/2013
WO	WO 2015/138218	9/2015

OTHER PUBLICATIONS

Light My Fire, Spork original, http://www.lightmyfire.com/products/products/spork/spork-original.aspx, downloaded on Mar. 6, 2014.
Primus, Folding Spork, http://store.primuscamping.com/cookware/utensils-and-accessories/primus-folding-spork-black/, downloaded on Mar. 6, 2014.
DCI, Swivel Spork & Knife Set, http://shop.dcigift.com/p/swivel-spork-knife-set, downloaded on Mar. 6, 2014.
Miksovsky et al., U.S. Appl. No. 16/213,466, filed Dec. 7, 2018.
Alite, Cloverware Lite, http://shop.alitedesigns.com/cloverware-lite.html, downloaded on Mar. 6, 2014.
Alite, Cloverware 2.0, http://shop.alitedesigns.com/cloverware-538.html, downloaded on Mar. 6, 2014.
Guyot, Microbites™, https://www.guyotdesigns.com/product-microbites/, downloaded on Mar. 6, 2014.
Guyot, Utensils, https://www.guyotdesigns.com/utensils/, downloaded on Mar. 6, 2014.
International Search Report dated Jul. 8, 2015 from International Application No. PCT/US2015/019017.
Written Opinion dated Jul. 8, 2015 from International Application No. PCT/US2015/019017.
Chinese Office Action dated Apr. 27, 2017 from Chinese Application No. 201580022197.1.
Chinese Office Action dated Aug. 1, 2017 from Chinese Application No. 201611163525.2.
European Search Report dated Jun. 16, 2017 from European Application No. 16202786.3-1653.
European Office Action dated Oct. 17, 2018 from European Patent Application No. 16 202 786.6-1011.
MSR Folding Camp Utensils, https://www.msrgear.com/cookware/folding-utensils, downloaded on Sep. 20, 2018.
GSI Outdoors, Telescoping Foon, http://www.gsioutdoors.com/telescoping-foon.html, downloaded on Sep. 20, 2018.
GSI Outdoors, Pivot Spatula, http://www.gsioutdoors.com/pivot-spatula.html, downloaded on Sep. 20, 2018.
Chinese Office Action dated Aug. 2, 2019 from Chinese Application No. 201810024557.7.
Extended European Search Report dated Oct. 22, 2019 from European Application No. 18208165.3-1011/3488740.

* cited by examiner

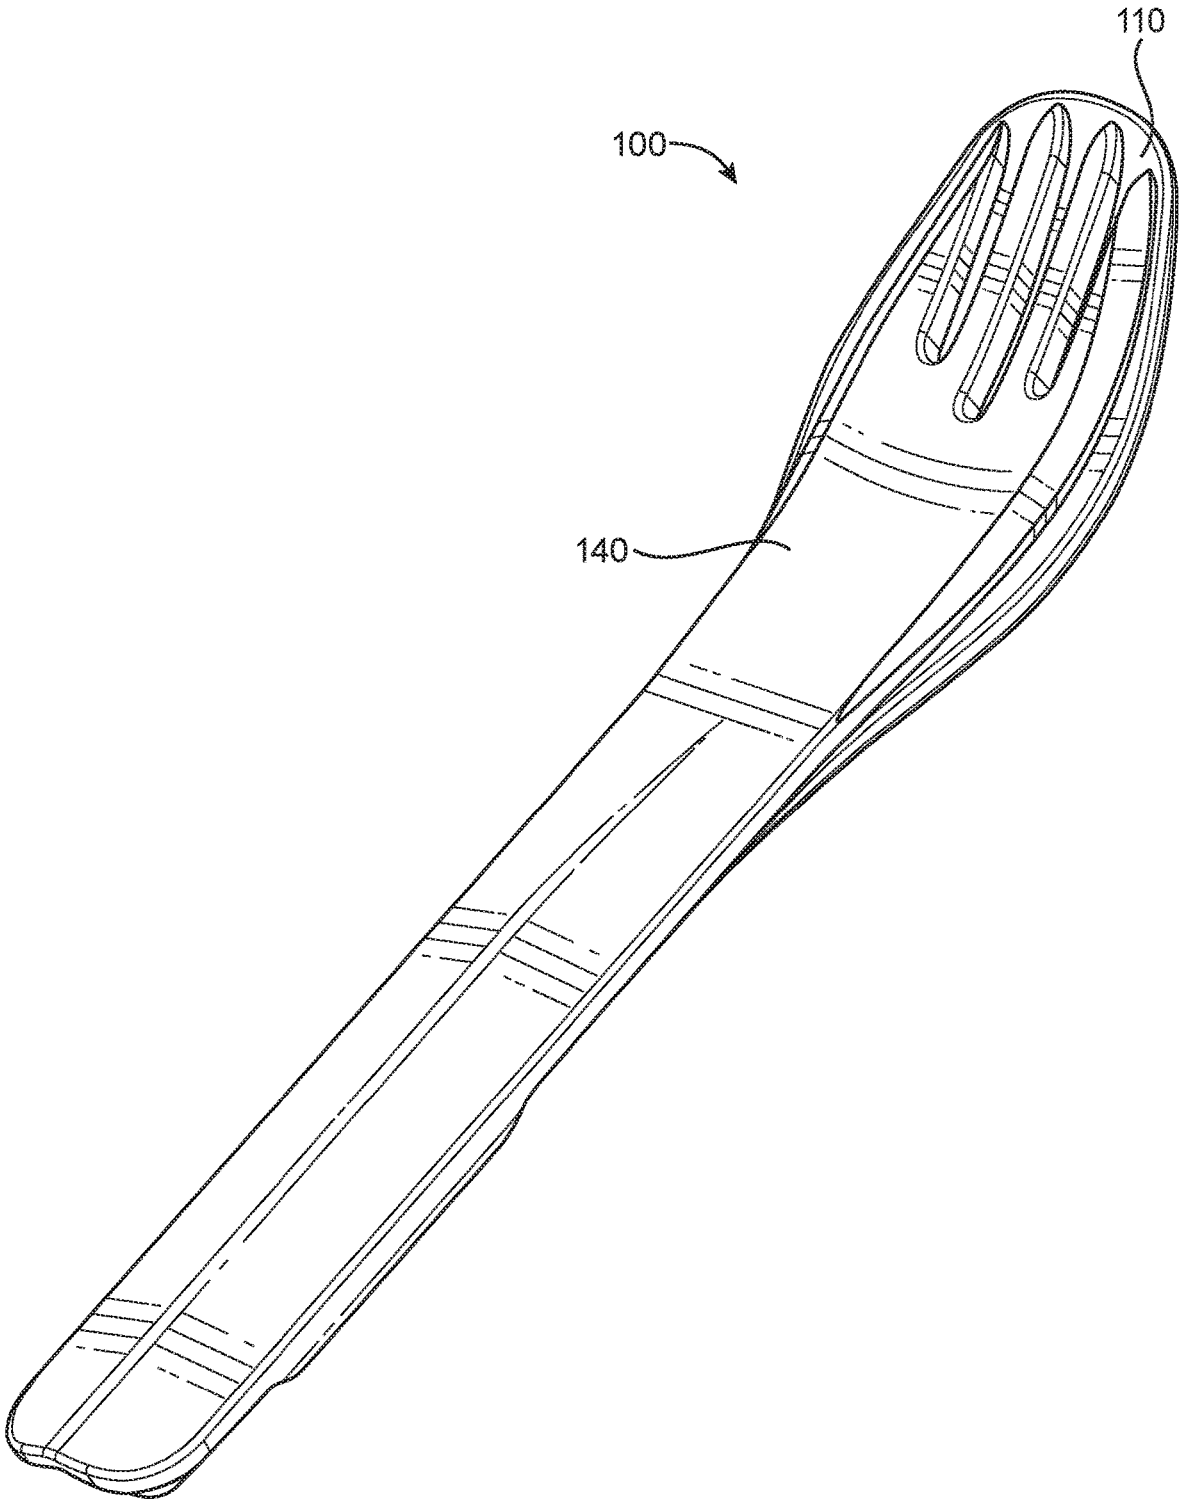


FIG. 1A

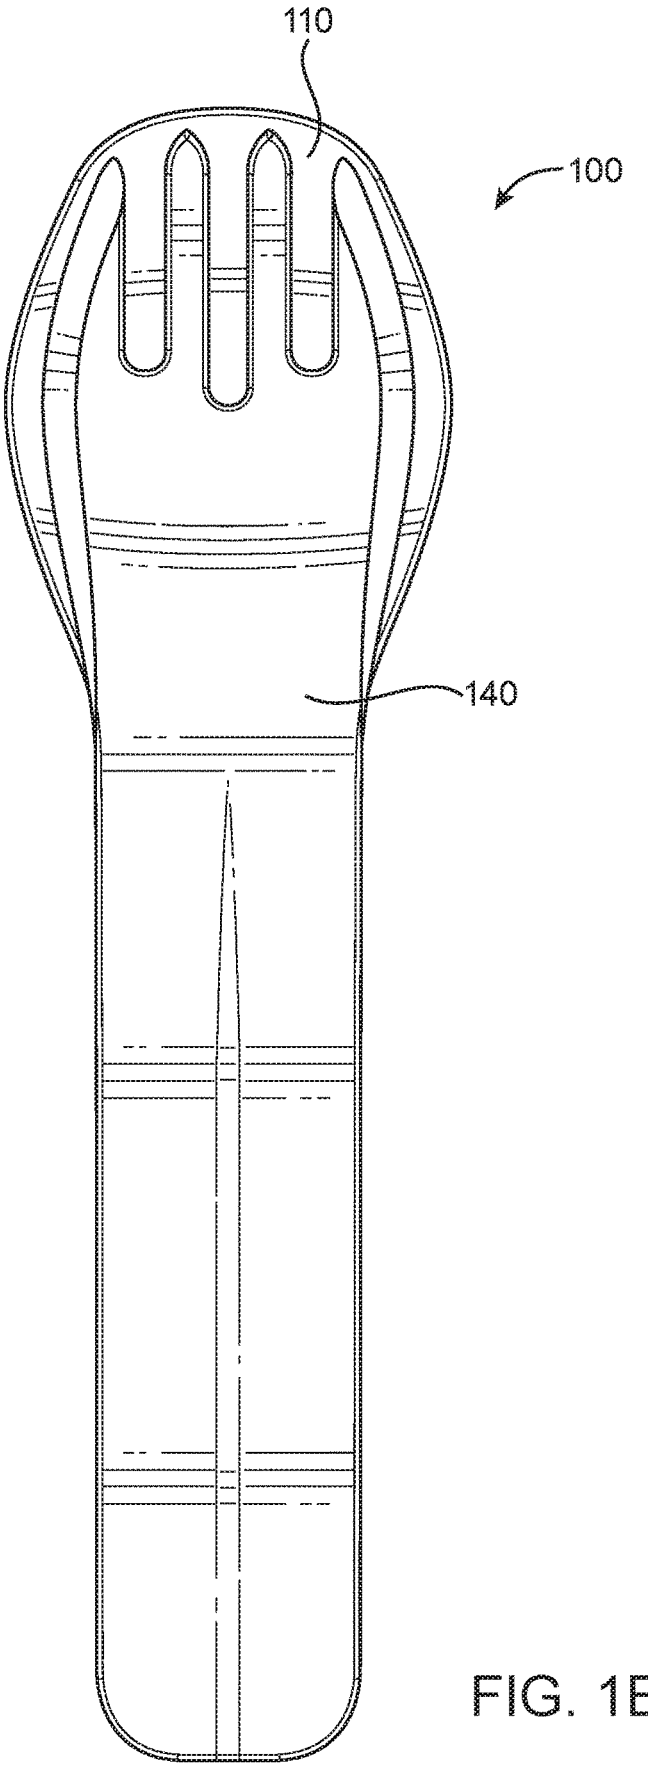


FIG. 1B

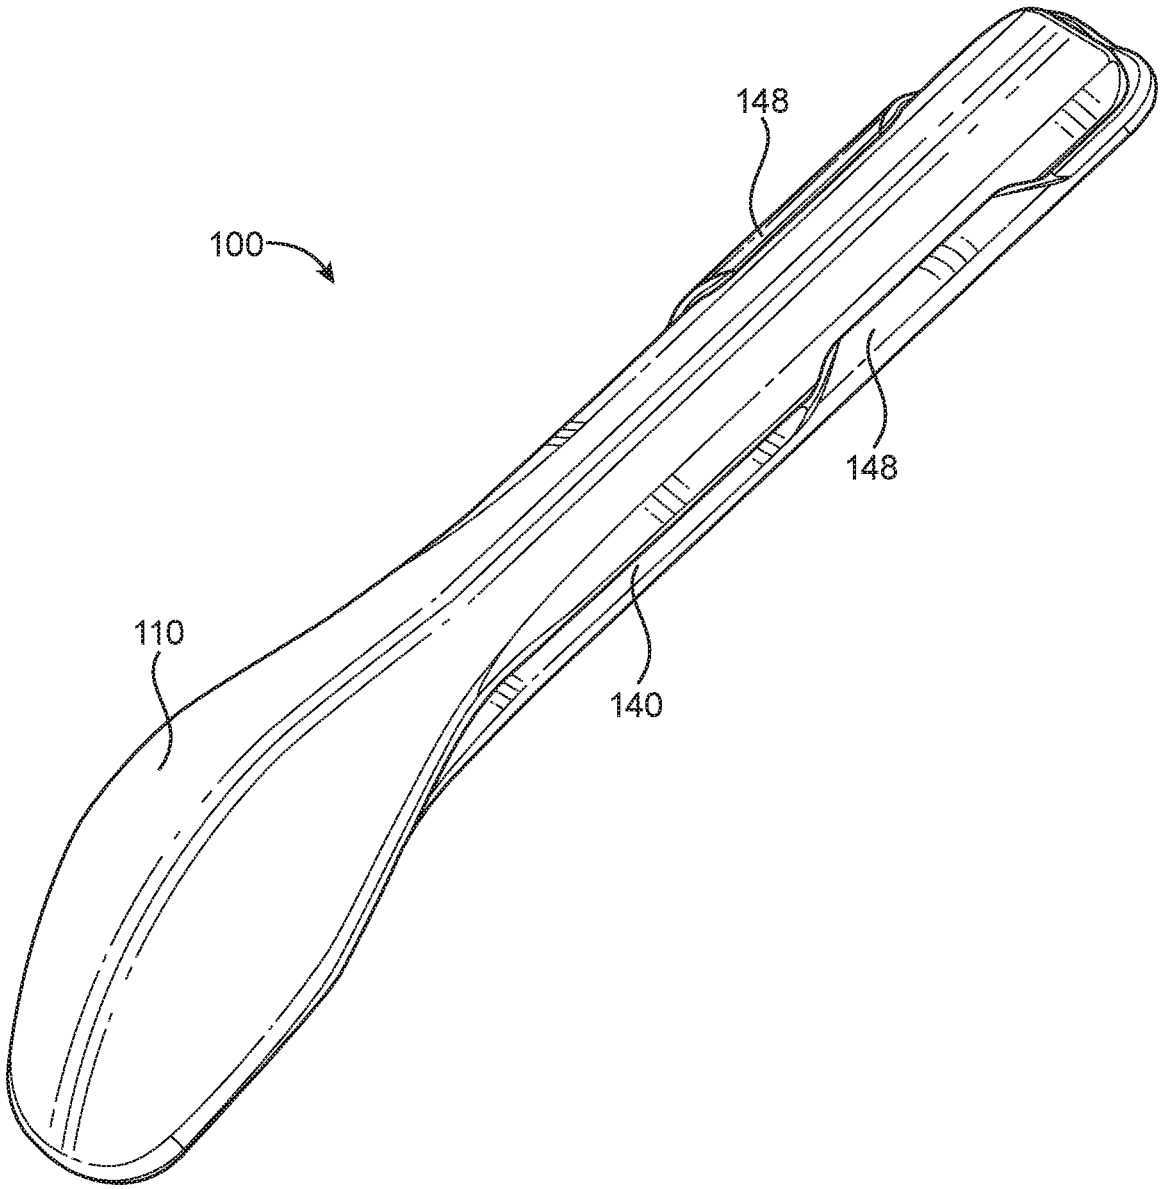


FIG. 2A

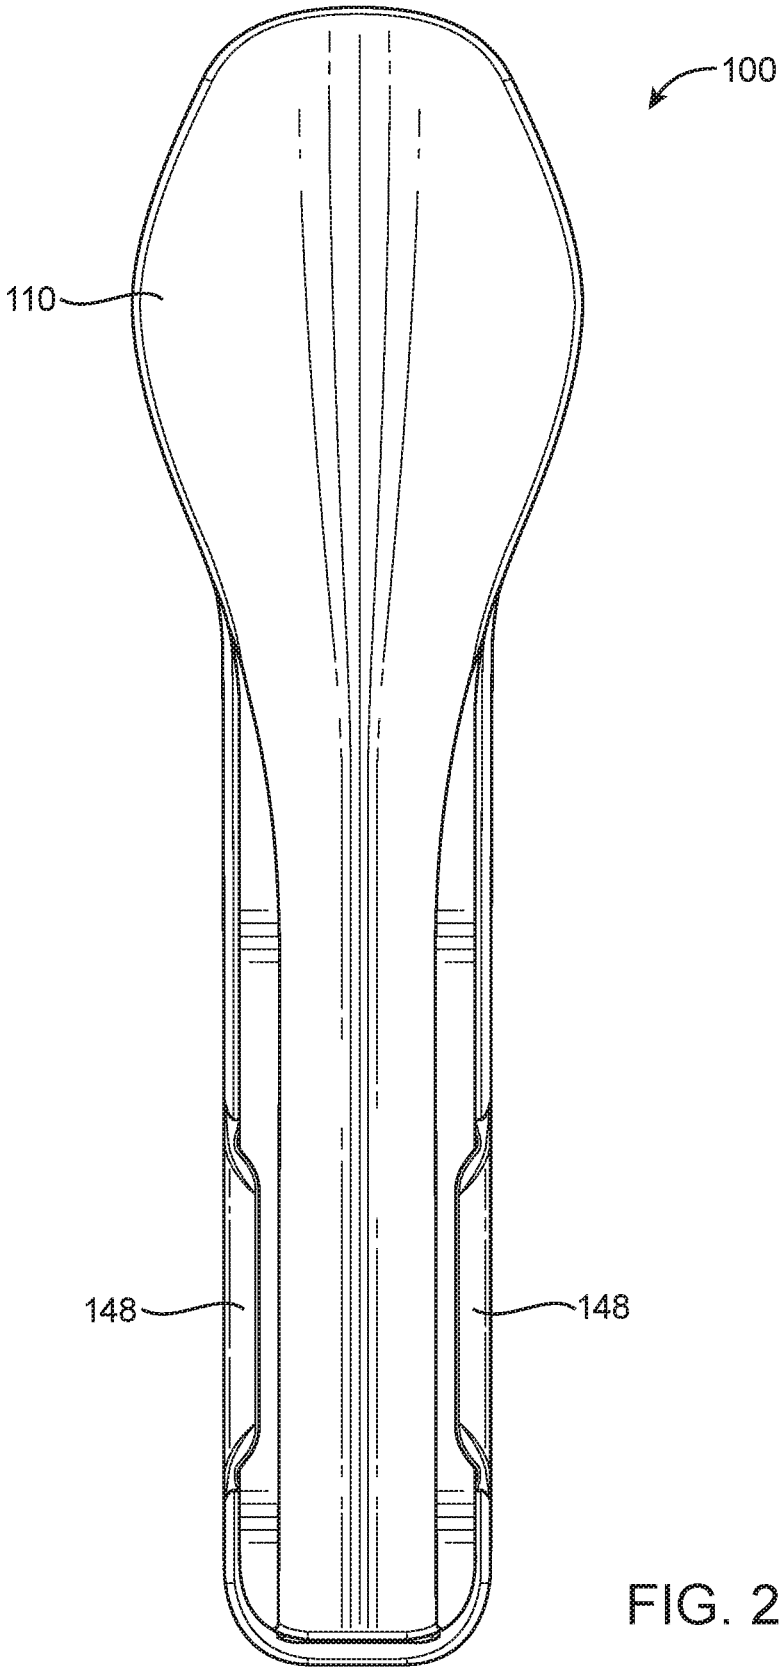


FIG. 2B

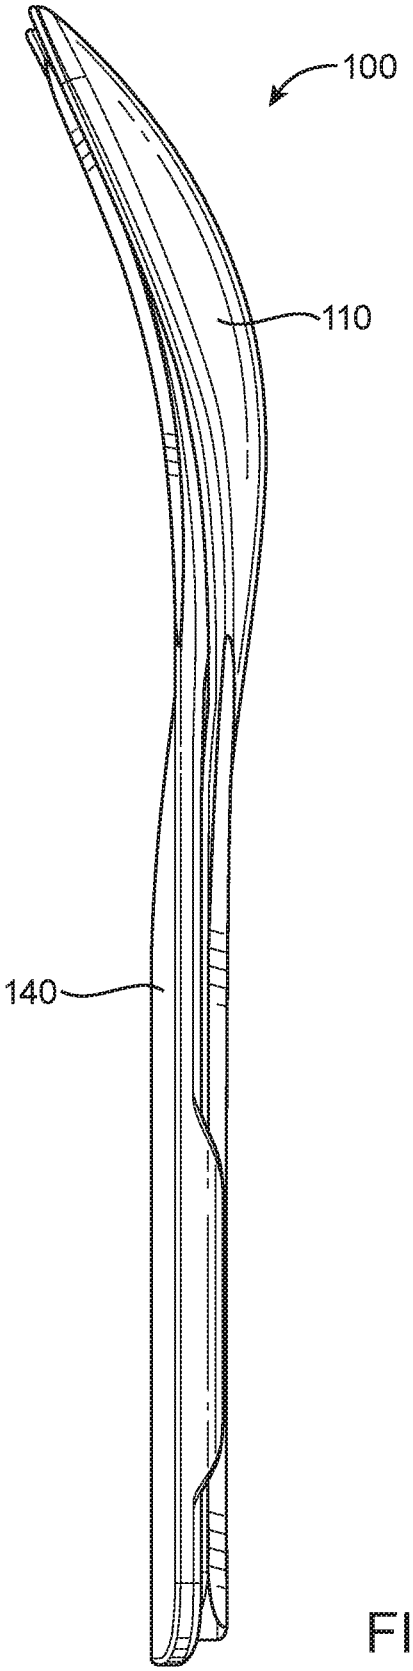


FIG. 3

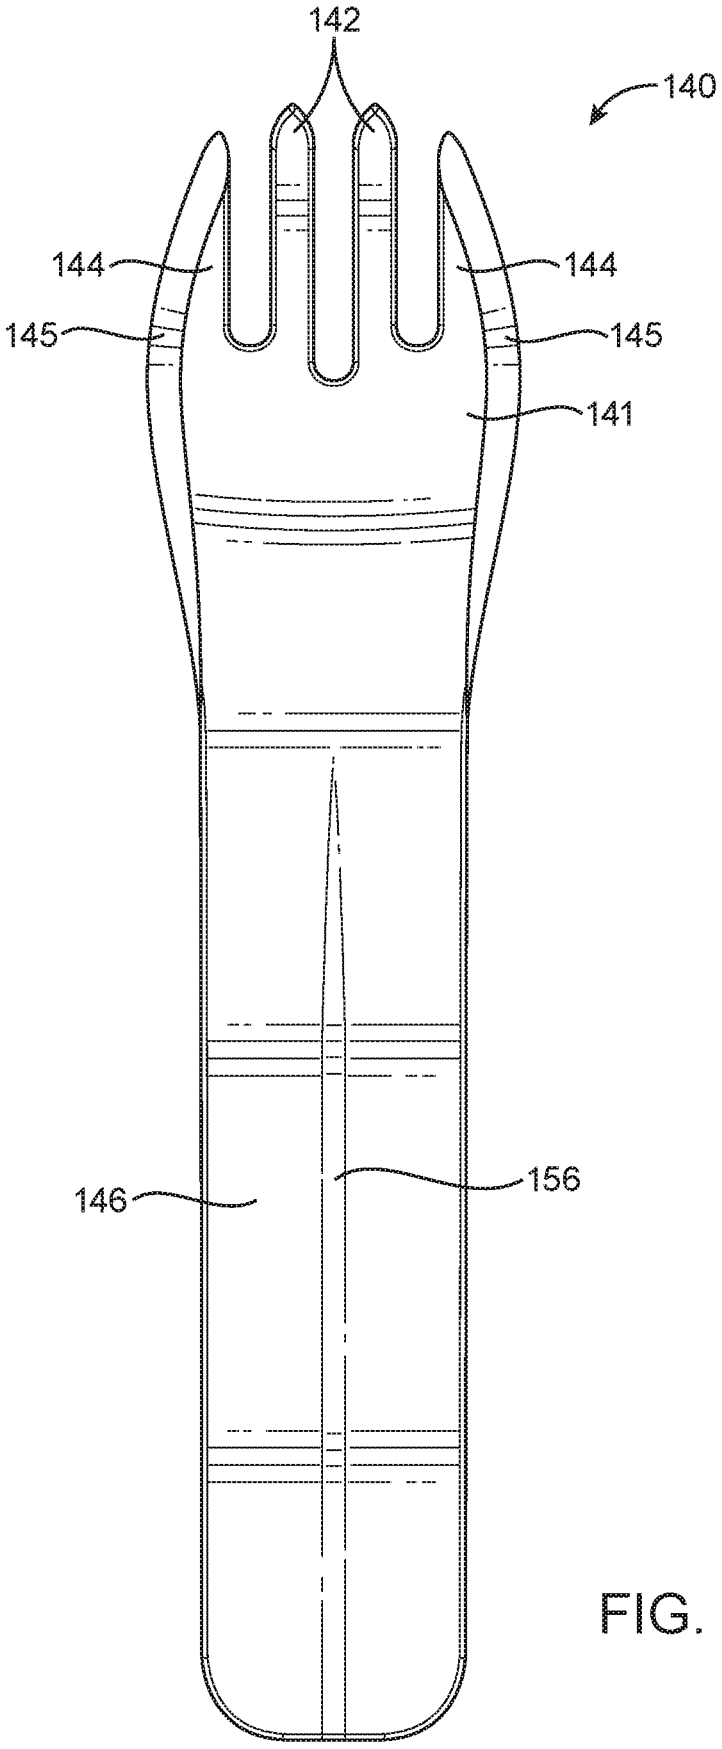


FIG. 4A

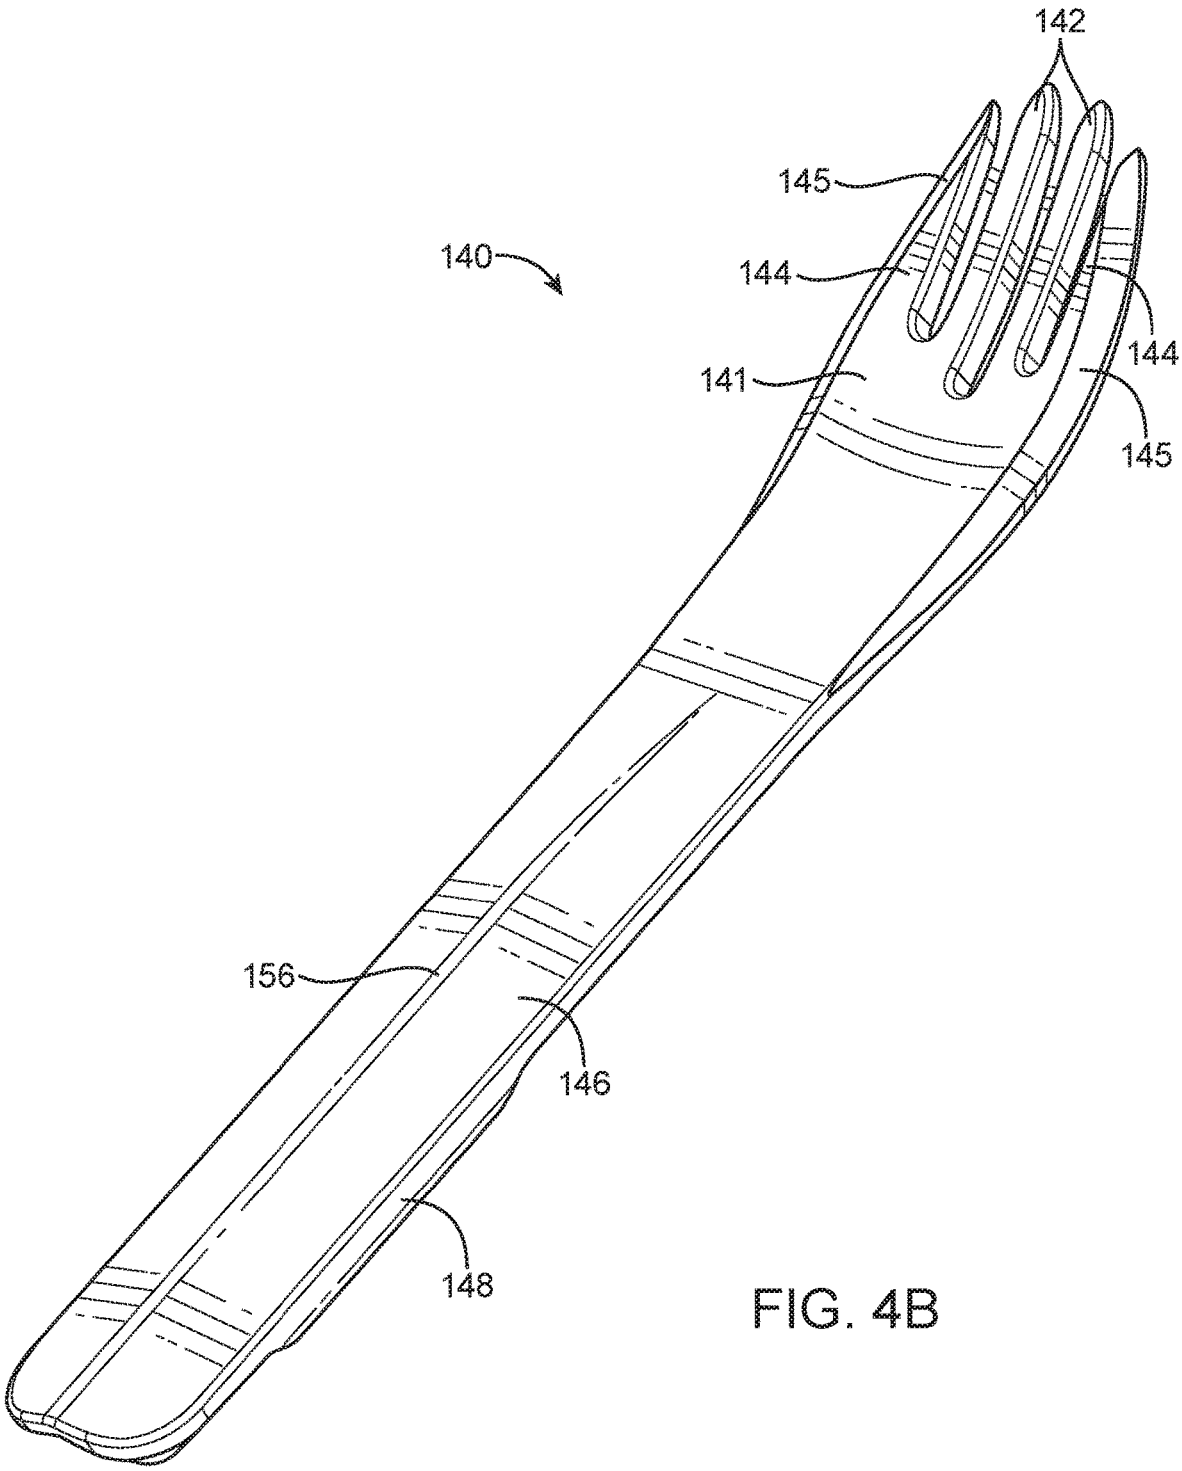


FIG. 4B

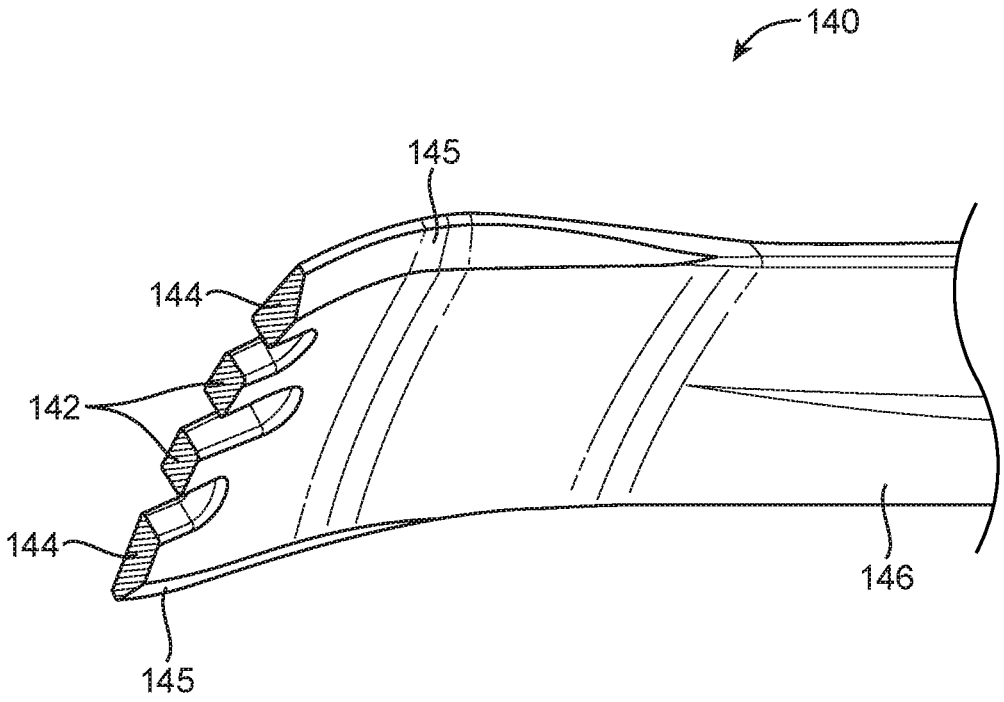


FIG. 4C

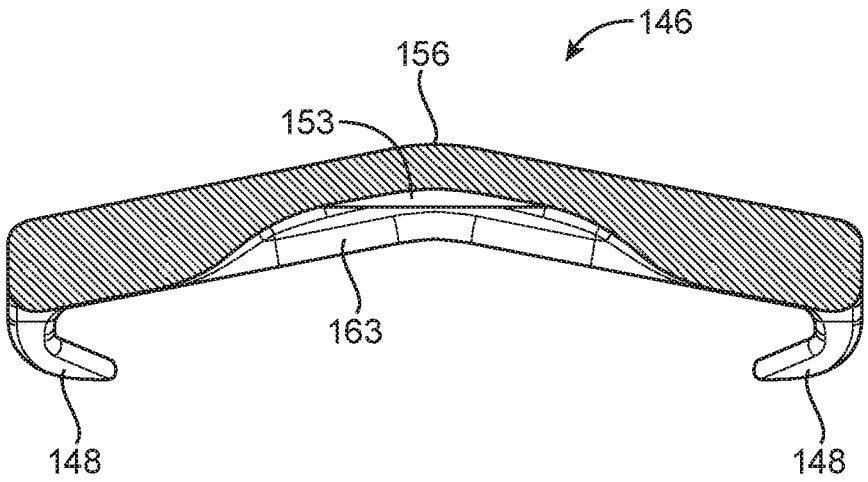


FIG. 4D

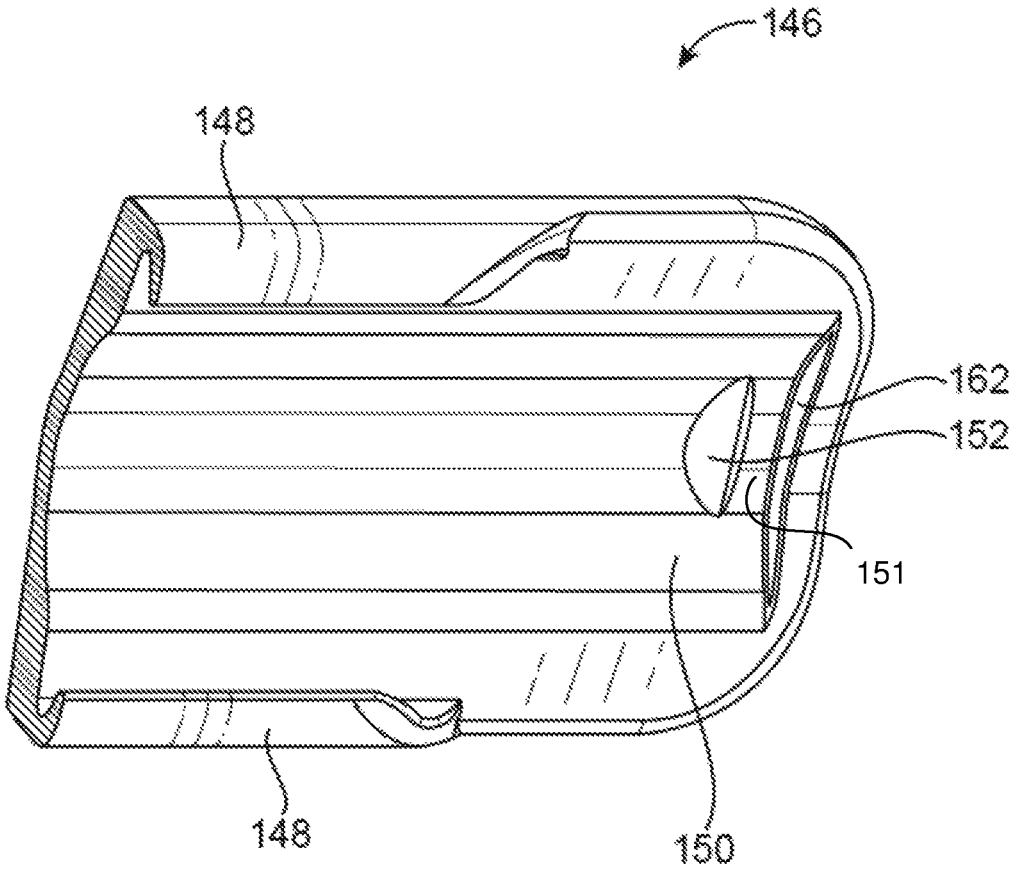


FIG. 4E

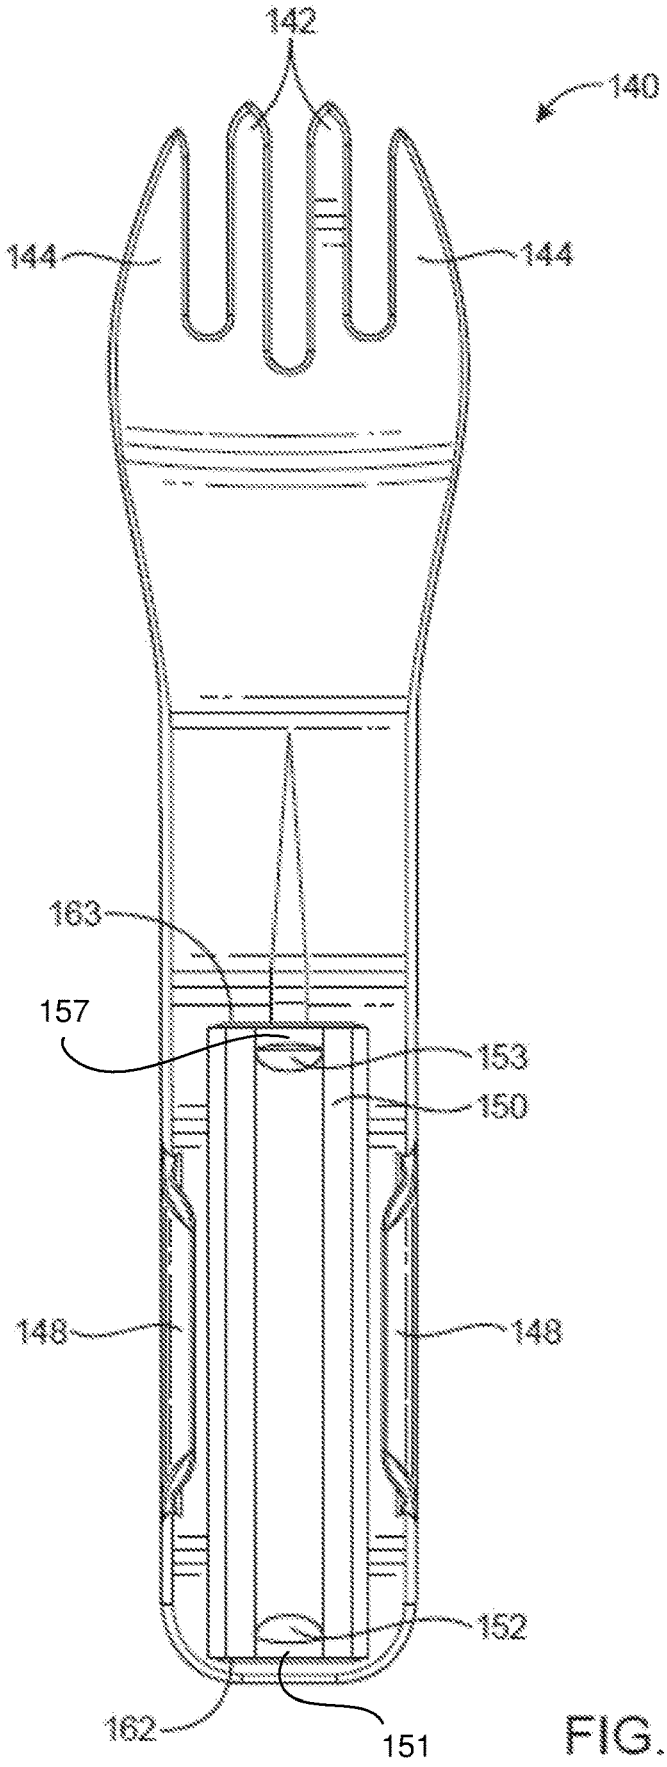


FIG. 4F

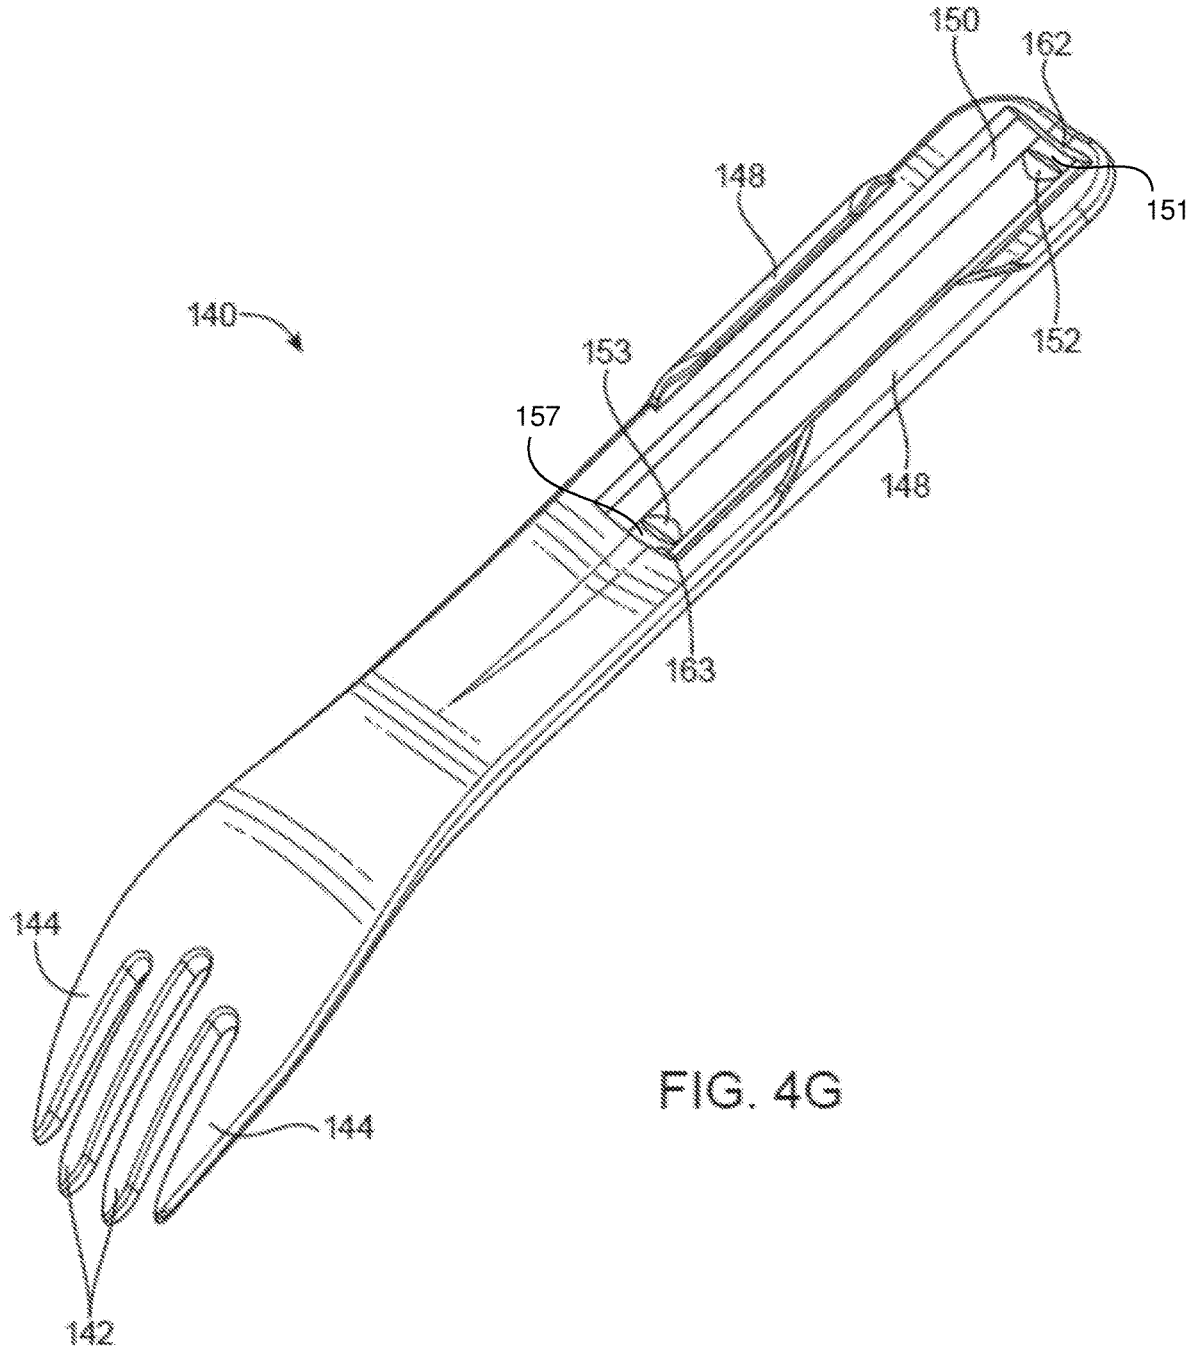


FIG. 4G

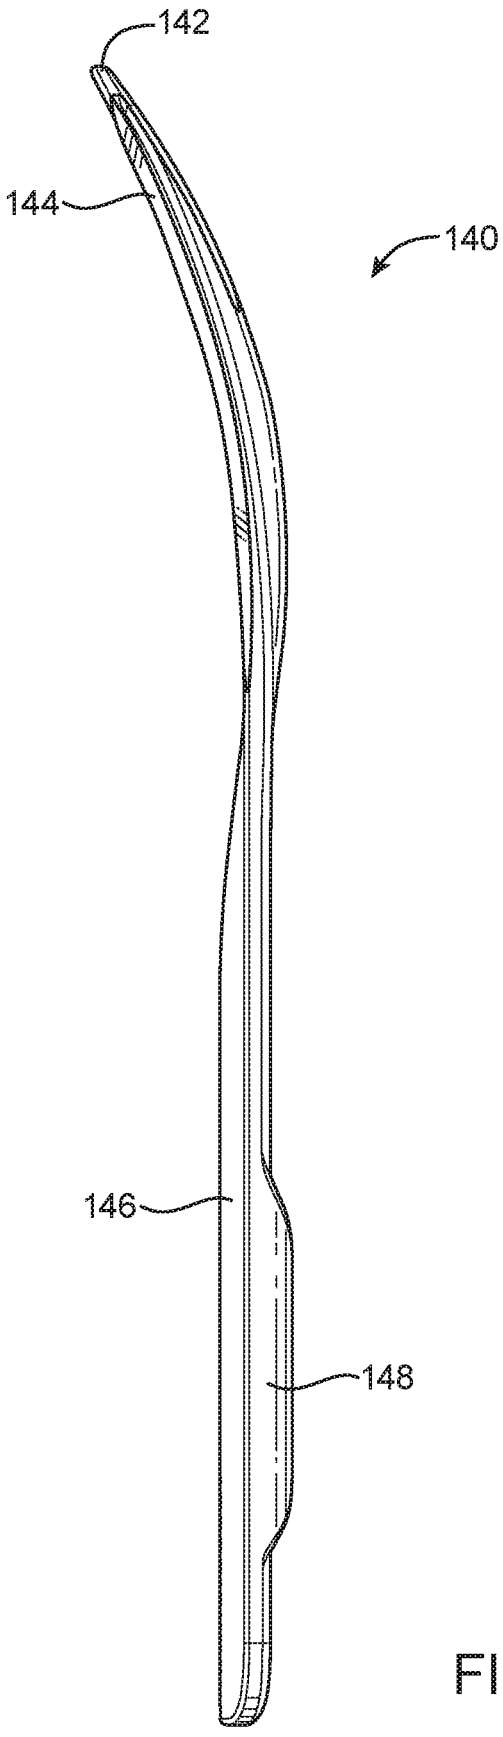


FIG. 4H

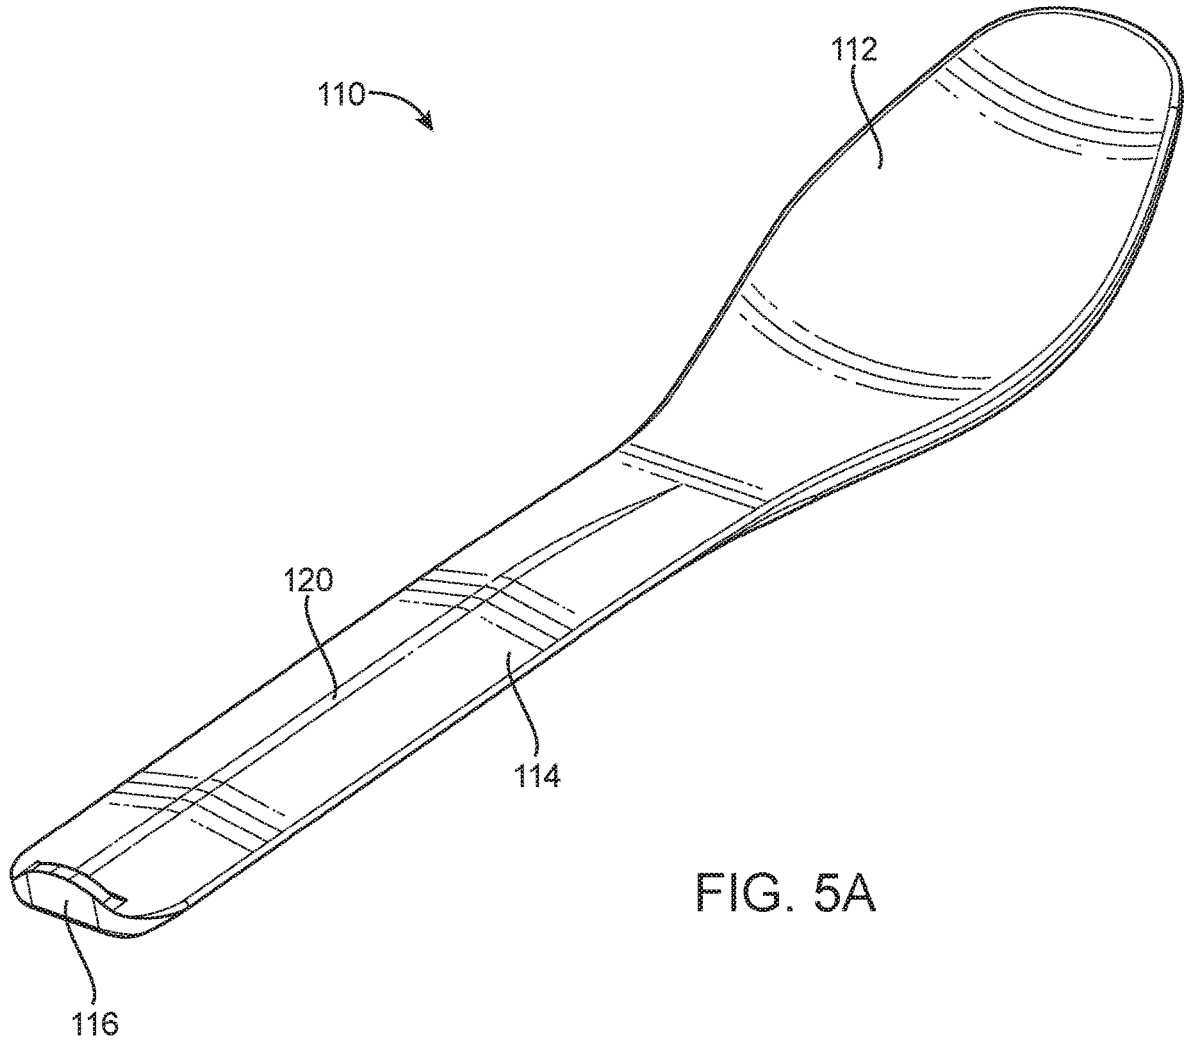


FIG. 5A

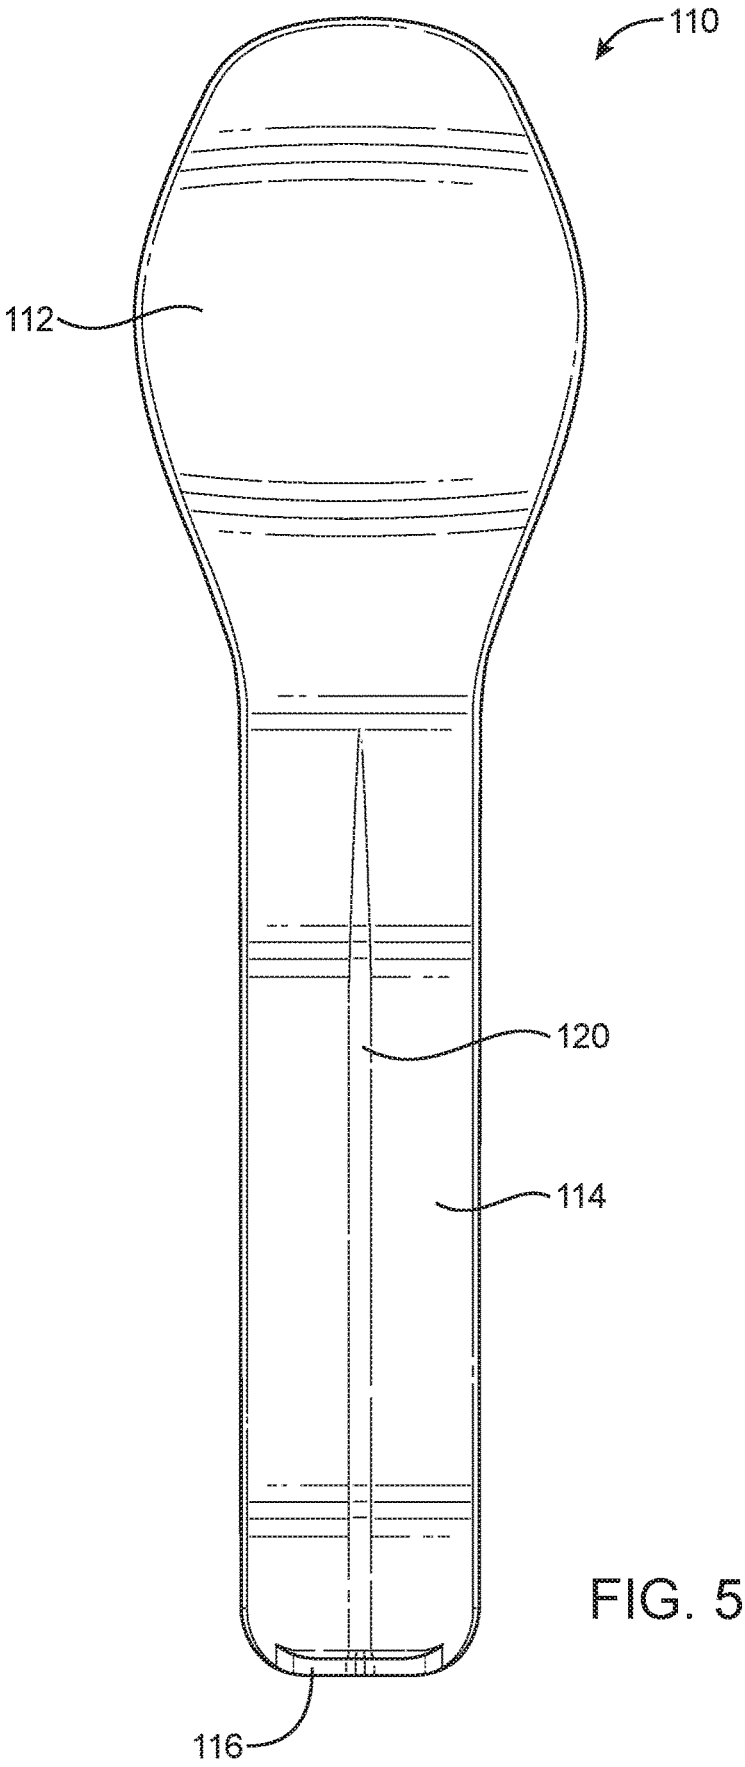


FIG. 5B

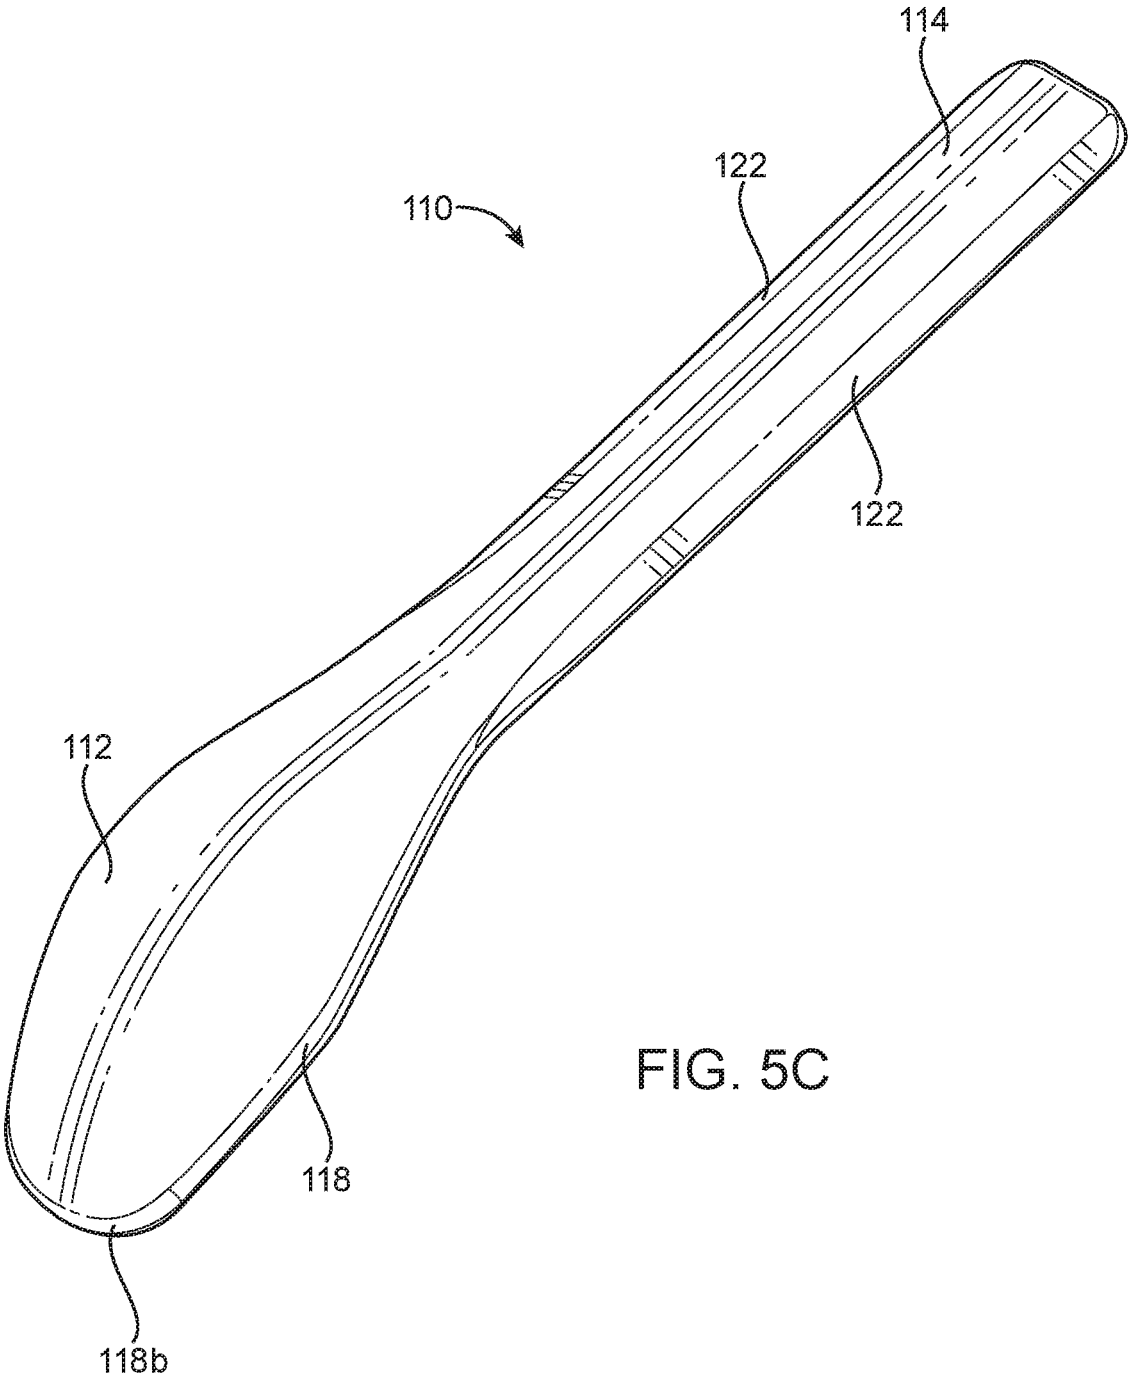


FIG. 5C

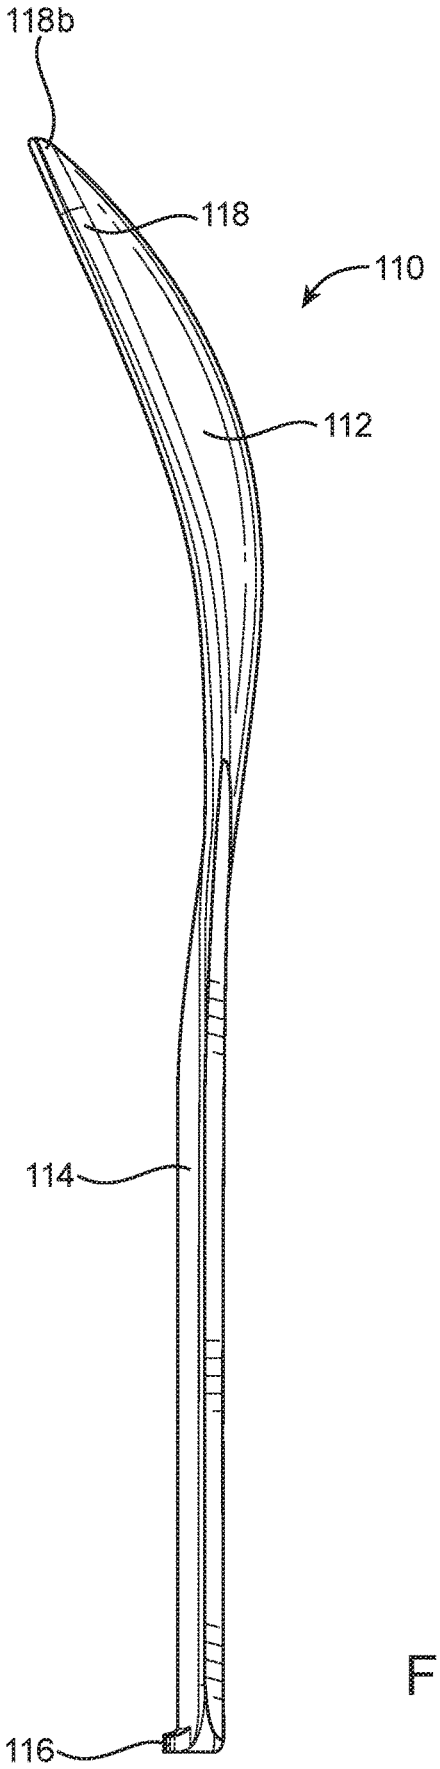


FIG. 5D

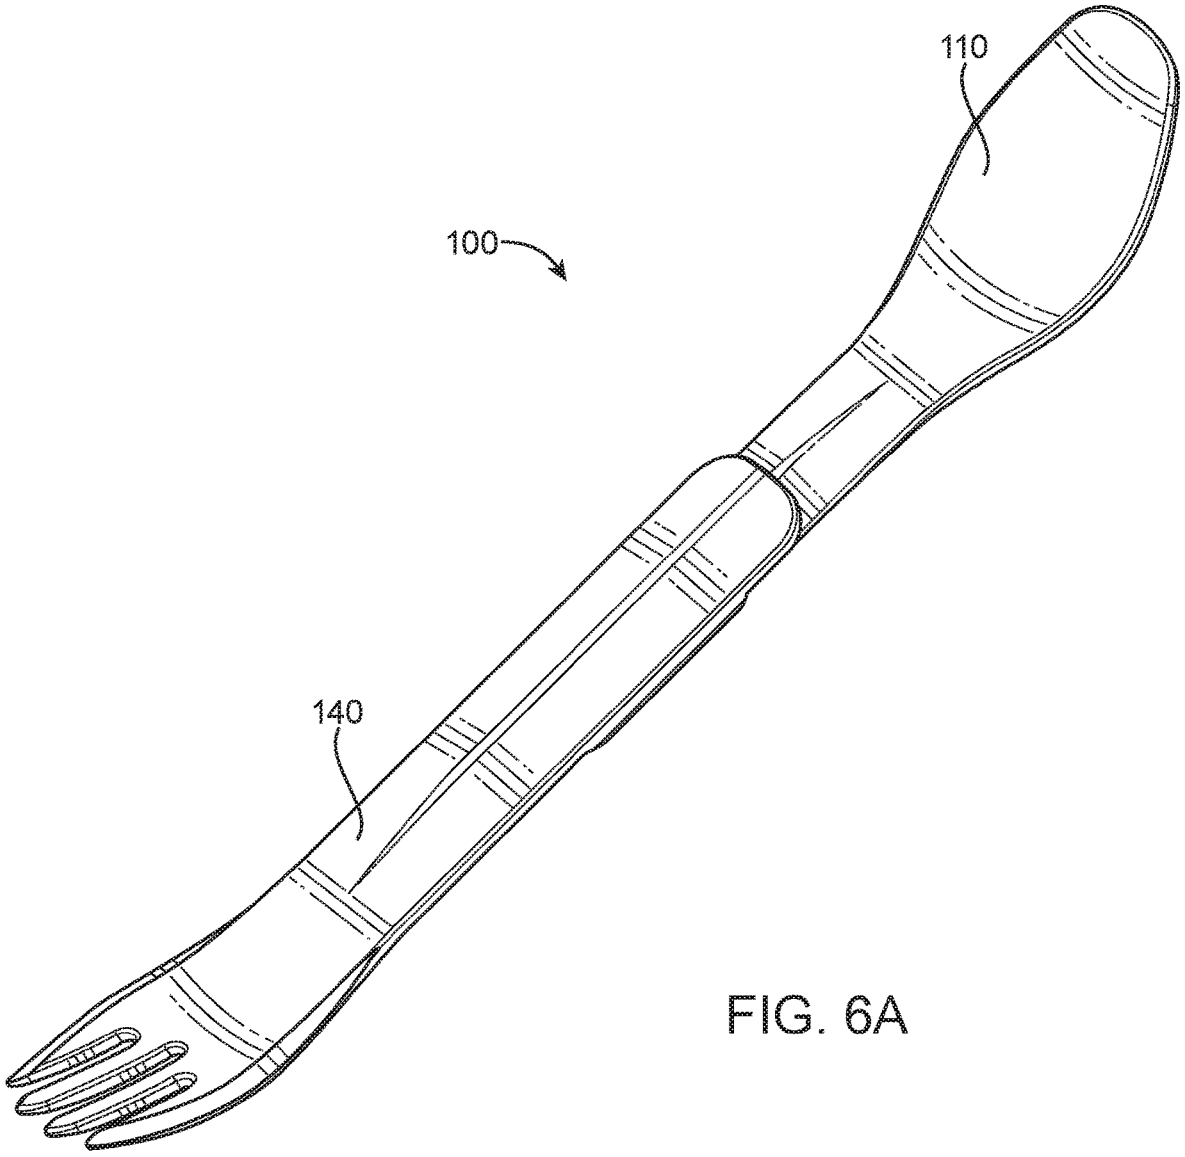


FIG. 6A

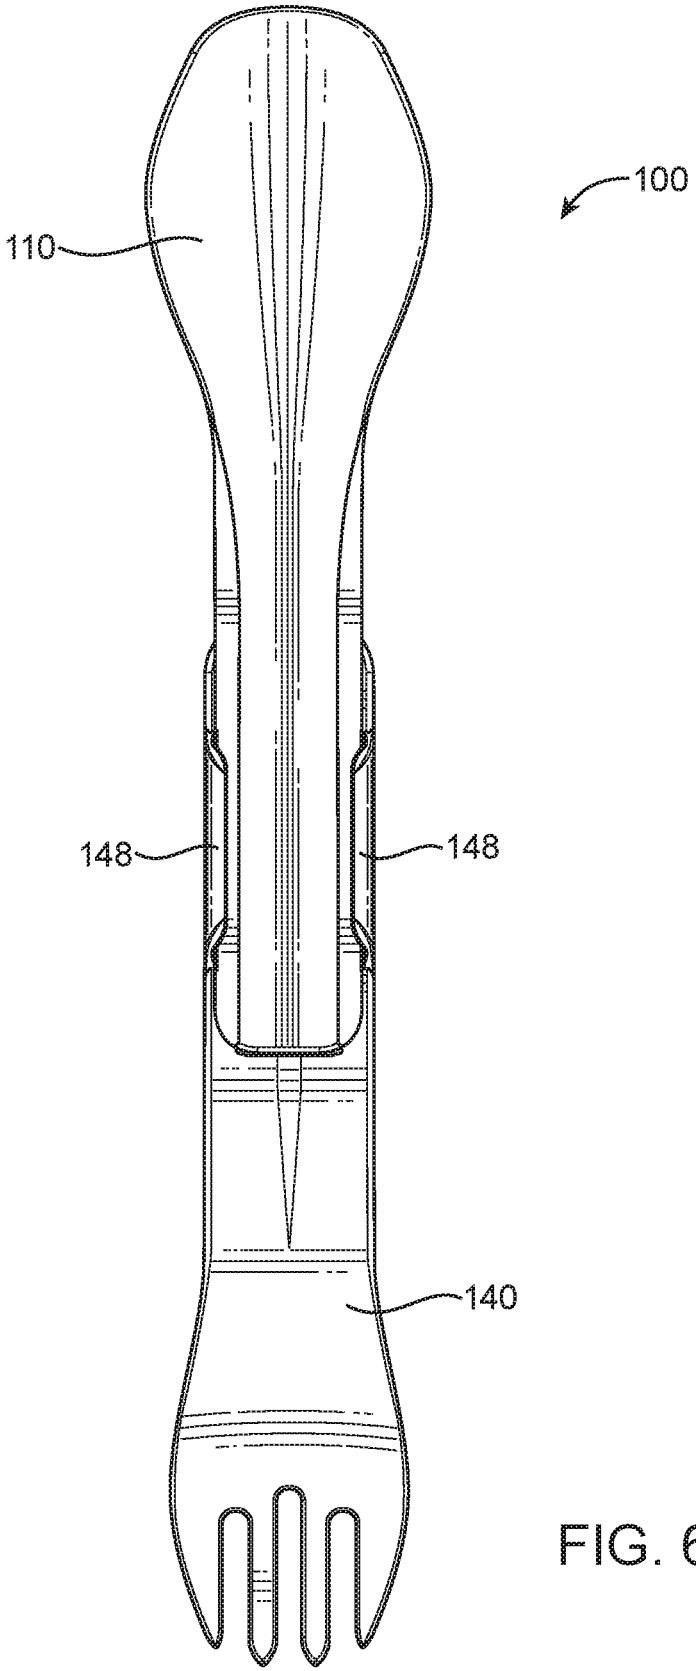


FIG. 6B

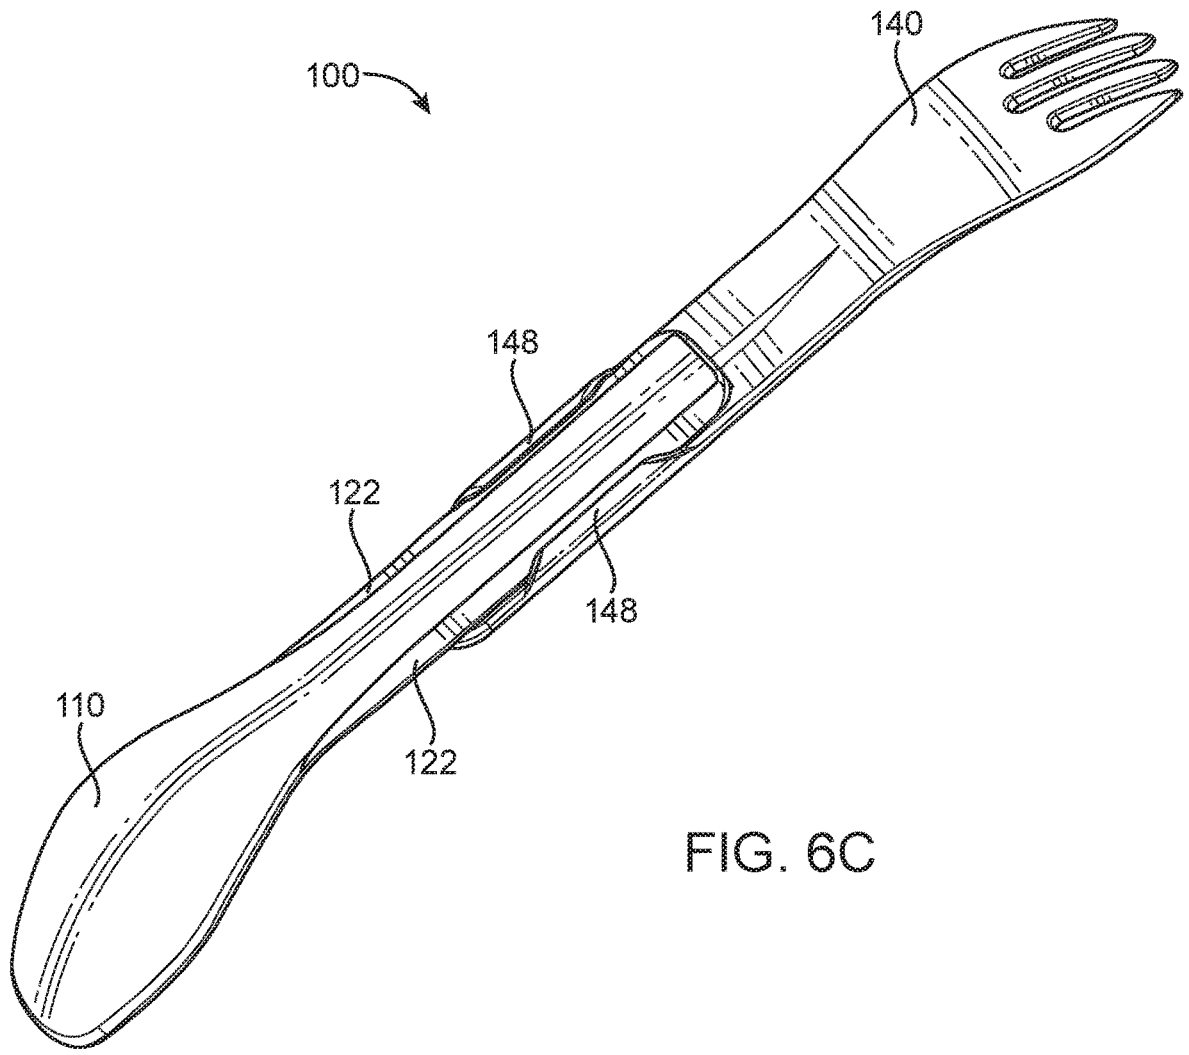


FIG. 6C

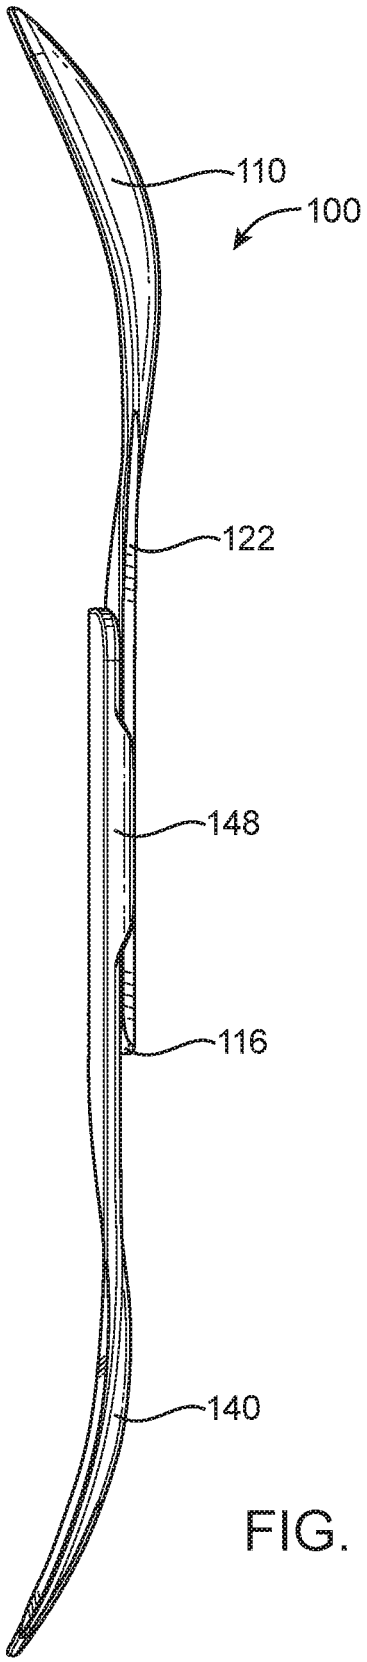


FIG. 6D

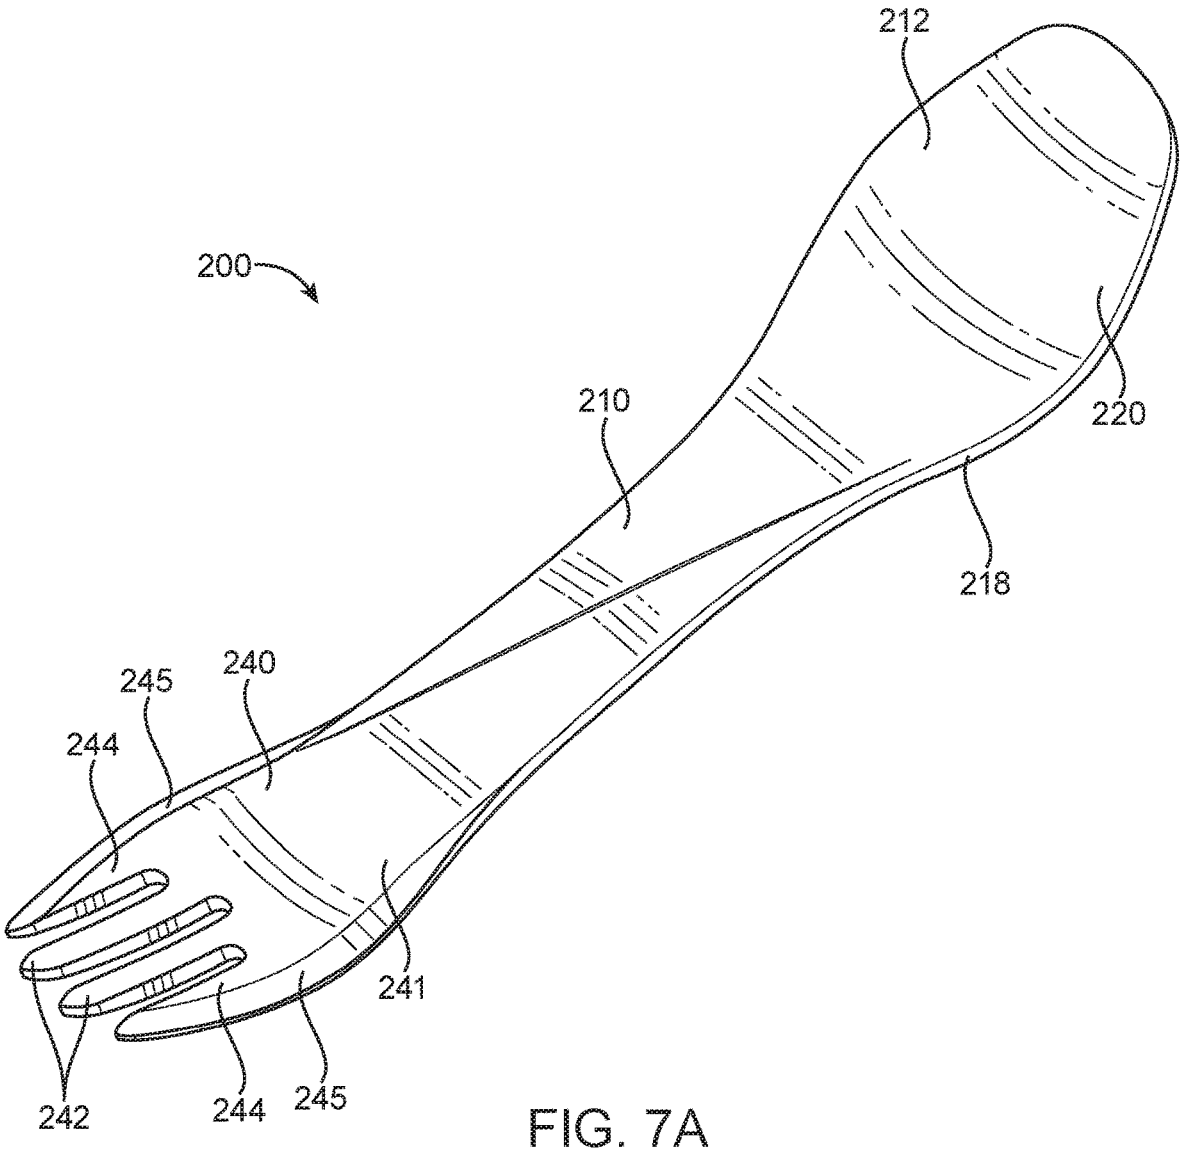


FIG. 7A

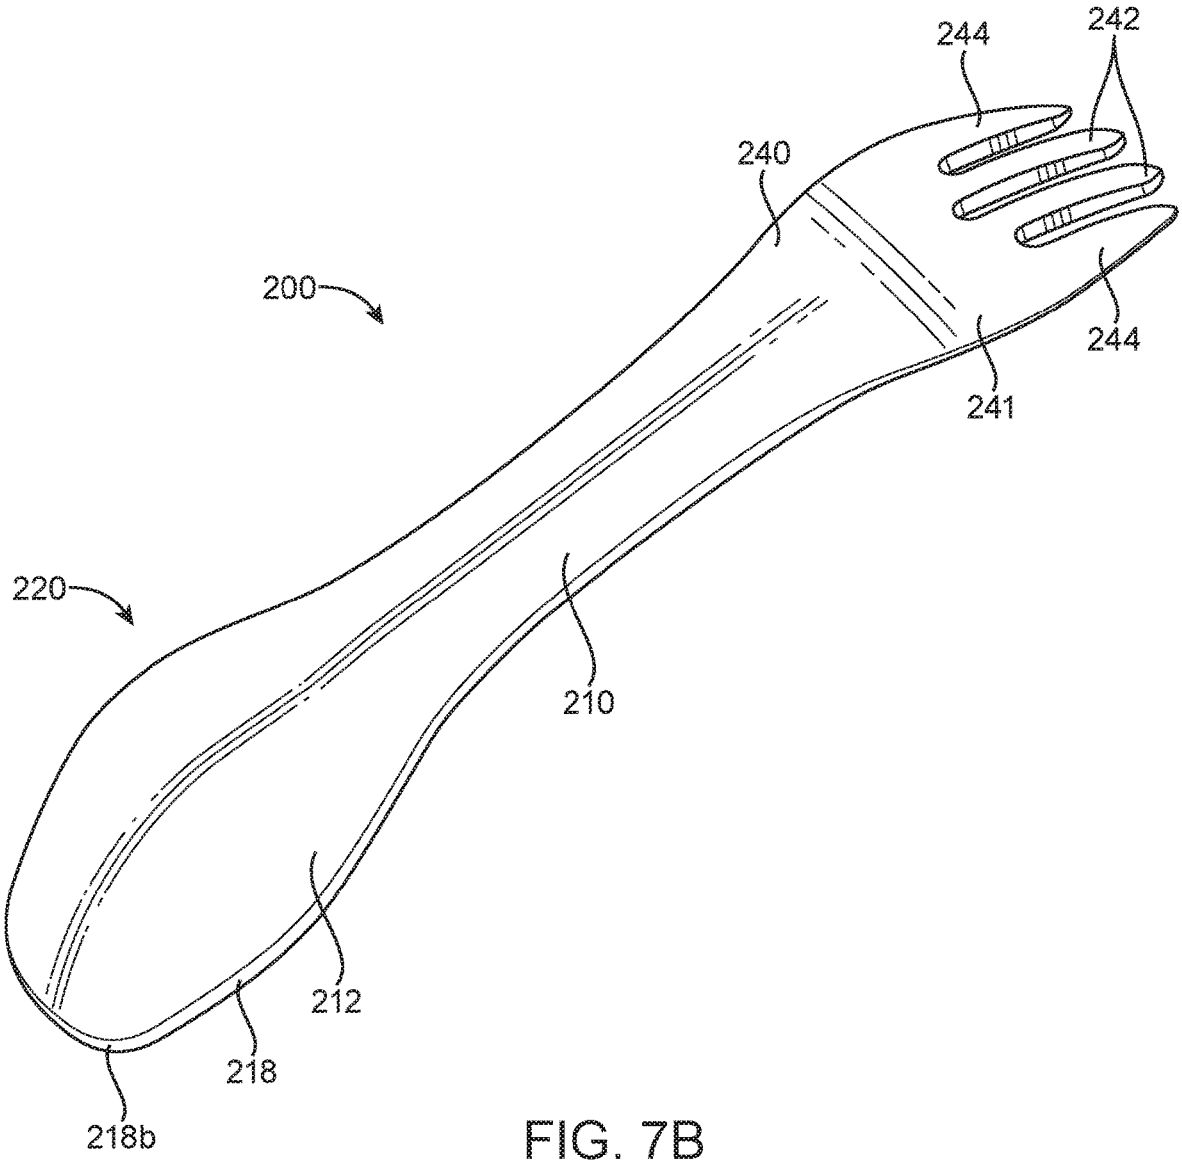


FIG. 7B

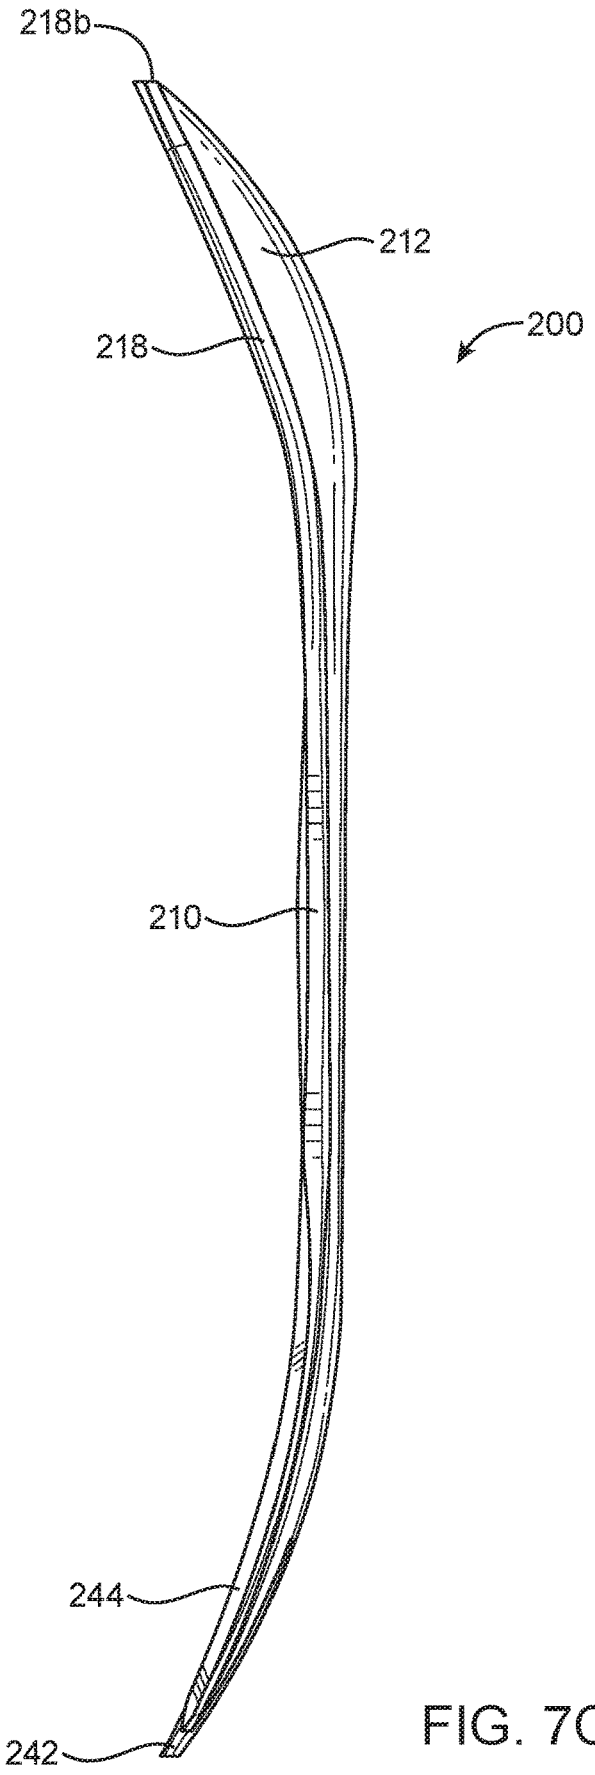


FIG. 7C

EATING UTENSIL SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a Divisional of U.S. application Ser. No. 15/268,175, filed on Sep. 16, 2016. U.S. application Ser. No. 15/268,175 is a Divisional of U.S. application Ser. No. 14/204,497, filed on Mar. 11, 2014 (now U.S. Pat. No. 9,468,321), which is related to U.S. Design application No. 29/484,447, filed on Mar. 10, 2014, all of which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

The present invention relates generally to eating utensils. More particularly, the invention relates to combination eating utensils that may be suitable for transport.

Eating utensils are used by people all over the world to bring food to their mouths. Sometimes, eating utensils, such as knives, are used to cut food to a size and shape suitable for placing in a person's mouth. In some Asian countries, chopsticks are typically the only eating utensils used although spoons are also used for soups in Asia. In Western countries, forks, knives, and spoons are typically used as eating utensils. In still other countries, such as India and Ethiopia, hands are often used in place of utensils.

Although these existing utensils work quite well, there are continuing efforts to develop new hybrid combinations of utensils that provide not only improved function and convenience but can also reduce the need for separate utensils. Such combination utensils are also more easily transported, as they take up less space.

SUMMARY OF THE INVENTION

In accordance with an embodiment, a combination fork and spoon system is provided. The combination fork and spoon system includes a fork and a spoon. The fork includes a recess in a bottom surface and a pair of rails. Each rail is positioned along a portion of an outer edge of the bottom surface of a handle. The spoon is configured to interlock with the fork either in a nested position or in an end to end configuration to form a mmthe rails.

In accordance with another embodiment, a combination eating utensil is provided. The combination eating utensil includes a fork and a spoon. The fork has a handle connected to a head portion including a plurality of tines. At least one tine on a curved outer edge of the head portion has a chamfered outer edge along substantially its entire length. The chamfered edge tapers to a point where the handle is connected to the head portion. The spoon has a substantially pentagonal bowl portion having substantially flat side and end edges. The spoon and fork can be connected at their proximal ends.

In accordance with yet another embodiment, a combination fork and spoon system is provided. The combination fork and spoon system includes a fork, a spoon, and an interlocking mechanism. The fork has a handle with a pair of rails along a portion of its side edges. The spoon has a handle slidable along the handle of the fork and the handle of the spoon is slidable between the rails of the fork. The interlocking mechanism is for interlocking the spoon and the fork either in a nested position or in an end to end position.

According to yet another embodiment, a fork is provided. The fork includes a head portion connected to a handle portion. The head portion includes a plurality of tines. An outer tine has a curved chamfered outer edge that extends along substantially an entire length of the head portion. The chamfered edge tapers to a point where the handle portion meets the head portion.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further objects and advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

FIG. **1**A is a top perspective of a combination spoon and fork system in its nested position in accordance with an embodiment.

FIG. **1**B is a top plan view of the combination spoon and fork system shown in FIG. **1**A in its nested position.

FIG. **2**A is a bottom perspective view of the embodiment shown in FIG. **1** in its nested position.

FIG. **2**B is a bottom plan view of the embodiment shown in FIG. **1** in its nested position.

FIG. **3** is a side view of the embodiment shown in FIGS. **1** and **2**.

FIG. **4**A is a top plan view of the fork separated from the spoon of the embodiment shown in FIGS. **1-3**.

FIG. **4**B is a top perspective view of the fork separated from the spoon of the embodiment shown in FIGS. **1-3**.

FIG. **4**C is a cross-sectional perspective view of the fork shown in FIGS. **4**A and **4**B.

FIG. **4**D is a cross-sectional end view of the handle portion of the fork shown in FIGS. **4**A-**4**C.

FIG. **4**E is a detailed cut-away view of the handle portion of the fork shown in FIGS. **4**A-**4**D.

FIG. **4**F is a bottom plan view of the fork shown in FIGS. **4**A-**4**E

FIG. **4**G is a bottom perspective view of the fork shown in FIGS. **4**A-**4**F.

FIG. **4**H is a side view of the fork shown in FIGS. **4**A-**4**G.

FIG. **5**A is a top perspective view of the spoon separated from the fork of the embodiment shown in FIGS. **1-3**.

FIG. **5**B is a top plan view of the spoon shown in FIG. **5**A.

FIG. **5**C is a bottom perspective view of the spoon shown in FIGS. **5**A and **5**B.

FIG. **5**D is a side view of the spoon shown in FIGS. **5**A-**5**C.

FIG. **6**A is a perspective view of the combination spoon and fork system in the elongated combination utensil position in accordance with an embodiment.

FIG. **6**B is a bottom plan view of the embodiment shown in FIG. **6**A.

FIG. **6**C is a bottom perspective view of the embodiment shown in FIGS. **6**A and **6**B.

FIG. **6**D is a side view of the embodiment shown in FIGS. **6**A-**6**C.

FIG. **7**A is a top perspective view of an integral combination utensil in accordance with an embodiment.

FIG. **7**B is a bottom perspective view of the integral combination utensil shown in FIG. **7**A.

FIG. **7**C is a side view of the integral combination utensil shown in FIGS. **7**A and **7**B.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention relates generally to combination eating utensils.

Referring to FIGS. **1-6**, a combination spoon and fork system in accordance with one embodiment of the invention

will be described. In the illustrated embodiment, the combination spoon and fork system **100** includes a spoon **110** and a fork **140** that can nest together for storage and transport. To form a single, longer combination utensil with a spoon on one end and a fork on the other end, the proximal ends of the spoon **110** and fork **140** can slide together and lock in place. A low profile interlocking mechanism is used to interlock the spoon **110** and the fork **140** in both the nested position and in the combination utensil mode. The spoon **110** and fork **140** can also be separated completely and used separately.

FIGS. **1**A and **1**B are top perspective and top plan views, respectively, of the combination spoon and fork system **100** in its nested position, in accordance with an embodiment. FIGS. **2**A and **2**B are bottom perspective and bottom plan views, respectively, of the spoon and fork system **100** in its nested position.

As shown in FIGS. **1-3**, the spoon **110** and fork **140** can be nested together in a low profile manner for convenient storage and transport. FIG. **3** is a side view of the combination spoon and fork system **100**, which illustrates the low profile nature of the spoon and fork system **100** nested position. In the illustrated embodiment, the fork **140** is nested over the spoon **110**.

As discussed above, the spoon **110** and the fork **140** can be separated from one another and used separately. The geometries of the fork **140** and the spoon **110** will be described below. FIGS. **4**A and **4**B are top plan and perspective views, respectively, of the fork **140** separated from the spoon **110**. In the illustrated embodiment, the fork **140** has four tines **142**, **144**. It will be understood that, in other embodiments, the fork can have more or fewer tines. The fork **140** has a head portion **141**, which includes the tines, that is connected to a handle **146**.

Each tine **142**, **144** has a sharp crest, which aids in spearing or piercing pieces of food so that the food can be picked up by the fork **140**. In the illustrated embodiment, the two center tines **142** are straight and the two outer tines **144** each have a straight inner edge and a curved outer edge **145**. The curved outer edges **145** of the outer tines **144** and the ends of the tines **142**, **144** do not extend beyond the outer edges of the bowl portion of the spoon **110**, as shown in FIGS. **1**A and **1**B. The curvature of the outer edges **145** can also be used for scraping food, as the curved edges **145** follow the curvature of a curved container, such as a bowl, better than the straight tines of many conventional forks.

In addition to being curved, the outer edges **145** of the outer tines **144** are also tapered or chamfered such that the fork **140** can be used to cut through or separate foods that do not require a knife. The tapered or chamfered outer edges **145** are shown in the cross-sectional perspective view of FIG. **4**C. As illustrated in FIG. **4**C, the top surface of each of the outer edges **145** is tapered or chamfered. As illustrated, each chamfered edge **145** has one end at the tip of the outer tine **144** and extends along the outer curved edge of the outer tine **144** to the position where the fork head **141** meets the handle **146**. As shown in FIGS. **4**A-**4**C, the chamfered edge **145** spans the entire width of the outer tine **144** at the tip. As the chamfered edge **145** extends down along the curved outer edge of the outer tine **144**, the width of the chamfered edge **145** remains substantially the same until it begins to taper toward the end of the fork head **141**. In the illustrated embodiment, the chamfered edge **145** tapers and ends in a point where the fork head **141** meets the handle **146**. Although the fork head **141** is described above as being connected to or meeting the handle **146**, it will be understood that the fork is formed as an integral piece in this embodiment.

In a particular embodiment, the outer edges **145** are chamfered at an angle of about 20-25 degrees, and preferably at an angle of about 23 degrees. The outer edges **145** have an edge width of about 1 mm at its widest point. In the illustrated embodiment, the outer edges **145** of both outer tines **144** are chamfered so that both outer edges **145** can easily be used to cut or separate food regardless of whether the user is right-handed or left-handed.

In the illustrated embodiment, as shown in FIGS. **1**A and **1**B, a safety feature is that when the spoon **110** and fork **140** are nested, the tines **142**, **144** of the fork **140** do not extend as far as the end of the spoon **110** such that the tips of the tines **142**, **144** cannot poke or stab someone or something when the fork **140** and spoon **110** are in the nested position.

As shown in FIGS. **1**A and **4**A, the center tines **142** have a longer length than the outer tines **144** and therefore extend farther distally than the outer tines **144**, thereby forming a curve at the distal end of the fork **140**. The curvature of the distal end of the fork **140** can match the curvature of the distal end of the spoon **110**, but as noted above, the tips of the tines **142**, **144** do not extend beyond the end edge of the spoon **110** when nested. As shown in FIG. **1**A, the bowl portion of the spoon **110** is slightly wider and longer than the corresponding portion of the fork **140** in the illustrated embodiment.

The handle **146** of the fork **140** will be described with reference to FIGS. **4**D-**4**H. The handle **146** has a pair of rails **148** that extend downward from the bottom side of its two outer edges. The rails **148** aid in guiding the handle **146** of the fork **150** over the handle **114** of the spoon **110** when the spoon handle **114** is slid between the rails **148** to either place the spoon **110** and fork **140** in the nested position or slid end over end to form an elongated combination eating utensil, as will be described in more detail below. The rails **148** also secure the spoon handle **114** to the handle **146** of the fork **140**, as will be explained in more detail below. As shown in the side view of FIGS. **3** and **6**D, the rails **148** are very low profile, as they do not extend below the lowest bottom surface of the spoon handle **114** when the fork **140** and spoon **110** are either nested together or slid end over end to form the elongated combination eating utensil. FIGS. **2**A, **2**B, **6**B and **6**C show that, in the illustrated embodiment, the rails **148** extend only to about halfway across the width of the chamfered edge **122** of the spoon **110**. The low profile nature of the rails **148** allow more efficient stacking of the fork and spoon systems **100**.

The outer edge of each rails **148** is aligned and continuous with the outer edge of the rest of the fork handle **146**. Further, the rails **148** taper inward so that the portion of the handle **146** with the rails **148** does not feel different from the rest of handle **146** when the fork **140** is held in a user's hand. The inward tapering as well as the low profile nature of the rails **148** reduce the tactile impact they have on a user's hand holding the fork. That is, the handle with low profile rails **148** feels better to hold than a handle having big protuberances, edges, etc.

As shown in FIG. **4**D, the handle portion **146** of the fork **140** has a slight upside down V-shape with a ridge **156** in the center when viewed from an end. The center ridge **156** is the highest point of the handle **146** and runs down the center along substantially the entire length of the handle **146**. Each side of the handle **146** angles downward from the center line to the edge at an angle of about 75-80 degrees, and preferably about 79 degrees.

The bottom of the fork handle **146** also includes a recess **150** that accommodates the contour of the top surface of the handle **114** of the spoon **110** as well as a crescent-shaped raised edge **116** on the proximal end of the spoon **110**. As shown in FIGS. **4**F and **4**G, the recess **150** has two straight end walls **162**, **163**, each acting as a hard stop when the raised edge **116** of the spoon **110** abuts the end wall.

The recess **150** also includes two detents **152**, **153**, one near each end of the recess **150**. As will be explained in more detail below, the detents **152**, **153** serve to snap and lock the spoon handle **114** in place relative to the handle **146** of the fork when the spoon **110** and fork **140** are in the nested position as well as when the spoon **110** and fork **140** are attached end to end to form an elongated eating utensil, as shown in FIGS. **6**A-**6**D.

The spoon **110** will be described below with reference to FIGS. **5**A-**5**D. FIG. **5**A is a top perspective view of the spoon **110**. The spoon **110** includes a head portion or bowl **112** and a handle **114**. The proximal end of the spoon handle **114** includes a crescent-shaped raised edge **116**. As shown in the side view of FIG. **5**D, the raised edge **116** protrudes above the top surface of the spoon handle **114**.

The spoon handle **114** and the fork handle **146** are contoured similarly. As shown in FIG. **5**A, the spoon handle **114** has a ridge **120** in the center. The center ridge **120** is the highest point of the handle body (excluding the raised edge **116**) and runs down the center along substantially the entire length of the handle **114**. Each side of the handle **114** angles downward from the center line **118** to the edge at an angle of about 75-80 degrees, and preferably about 79 degrees.

The bowl **112** of the spoon **110** has a substantially flat side edge **118**, which allows for "scraping" food from of a container (e.g., a yogurt container) or a bowl. A conventional spoon typically has a rounded edge that is not particularly effective for scraping. As illustrated, the side edge **118** and front edge **118***b* of the bowl **112** of the spoon **110** is substantially flat, thus providing an effective surface for scraping. In the illustrated embodiment, as shown in FIG. **5**B, the bowl **112** has a substantially elongated pentagonal shape with rounded corners.

Also, as shown in the side view of FIG. **5**D, the bowl **112** is angled upward to form a deeper bowl, which can be more efficient when scooping liquids, such as soups. In a particular embodiment, the bowl is angled upward at an angle of about 20-25 degrees, and preferably about 23 degrees. It will be noted that the spoon **110** has a deeper bowl **112** than the corresponding head portion **141** of the fork **140** so that the fork **140** can be nested on top of the spoon **110** in the nested position.

In the illustrated embodiment, the bottom surface of each of the edges **122** of the handle **114** of the spoon **110** is tapered or chamfered so that the edge **122** can be used as a splitter or cutter, similar to the outer tines **144** of the fork **140**. In the illustrated embodiment as shown in FIG. **5**C, the chamfered edge **122** starts at the proximal end of the spoon **110** and extends along the entire length of the spoon handle **114**. In a particular embodiment, the edges **122** are chamfered at an angle of about 65-70 degrees, and preferably about 67 degrees, and each edge **122** has a width of about 0.7 mm at its widest point. The width remains substantially the same along the length of the chamfered edge **122** but tapers to end in a point where the spoon handle **114** meets the head portion or bowl **112**, as shown in FIG. **5**C. Although the spoon head portion or bowl **112** is described above as being connected to or meeting the spoon handle **114**, it will be understood that the spoon is formed as an integral piece in this embodiment. In the illustrated embodiment, both edges **122** are chamfered so that both edges **122** can easily be used to cut or separate food regardless of whether the user is right-handed or left-handed.

The taper of the bottom surface edges **122** of the spoon handle **114** also allows for low profile rails **148** on the fork **140**, as the edges **122** of the spoon **140** are configured to slide under and between the rails **148** of the fork **140** to either nest the spoon **110** and fork **140** together or to form a longer combination eating utensil. That is, the bottom edges **122** are chamfered at an angle that corresponds to the angle of the bottom surface of the rails **148** on the fork **140**. According to an embodiment, the height of the rails is about 1.5-3 mm and the height of the edges **122** is about 0.5-1.75 mm.

The rails **148** are so low profile that when the spoon **110** and fork **140** are interlocked (whether in the nested position or connected in the elongated combination utensil position), the bottom of the spoon bowl **112** actually extends below the bottom of the rails **148**, as shown in the side view of FIGS. **3** and **6**D.

The spoon **110** and fork **140** are formed of a plastic material, such as a glass reinforced thermoplastic, that is suitable for food contact. A particularly suitable reinforced thermoplastic for forming the spoon **110** and fork **140** is glass filled nylon. Compared with unreinforced nylon, glass filled nylon has increased structural strength and stiffness.

Nested Position

As shown in FIGS. **1**-**3**, the spoon **110** and fork **140** can be nested together for storage and/or transport. In the nested position, the spoon **110** and fork **140** are interlocked with the spoon head **112** and the fork head **141** oriented the same way. An interlocking mechanism can lock the spoon **110** in place relative to the fork **140**, as will be described in more detail below.

As described above, there is a recess **150** in the bottom surface of the fork **140** that is configured to receive the top surface spoon handle **114** and its crescent-shaped raised edge **116**. To nest the spoon **110** and fork **140** together, the spoon **110** is first positioned underneath the fork **140** in the same orientation (the spoon **110** and fork **140** are both facing up or both facing down) and both pointed in the same direction (the bowl and tines pointed in the same direction), with the raised edge **116** at the proximal end of the spoon positioned in the recess **150** of the fork **140** laterally between the rails **148** and the detent **153** closer to the distal end of the fork **140**. The curvature of the crescent-shaped raised edge **116** corresponds to the curvature of the recess **150** such that the raised edge **116** fits nicely in the recess **150**.

The raised edge **116** at proximal end of the spoon **110** is then slid laterally along the recess **150** toward the proximal end of the fork **140** while guiding the outer edges of the spoon handle **114** between the rails **148** until the raised edge **116** abuts the gradually sloped face of the detent **152** closer to the proximal end of the fork **140**. A greater force is then applied in the same direction to push the raised edge **116** over the gradually sloped face of the detent **152** and over the top of the detent **152** to engage the groove **151** between the detent **152** and the proximal end wall **162** of the recess **150**. As the raised edge **116** is pushed over the gradually sloped face of the detent **152**, the handle-ends of the spoon **110** and fork **140** are bent away from each other. This bending allows the crescent of the raised edge **116** to ride up and over the detent **152**. The distance between the ends of the rails **148** and the detent **152** effectively creates beams in the spoon and fork ends that are made to bend through the pressing or pulling action. It will be appreciated that the snapping force can be tuned by such things as changing the length of the

rails and/or the size of the detent. That is, longer rails results in shorter beams making it more difficult to deflect and snap. Conversely, shorter rails result in longer beams making it easier to deflect and snap.

With the raised edge **116** snapped in the groove **151** between the detent **152** and the proximal end wall **162** of the recess **150**, the spoon **110** and fork **140** are interlocked. The end wall **162** acts as a hard stop and prevents the spoon **110** from moving beyond the locked position and the detent **152** prevents the spoon **110** from moving back in the opposite direction to disengage the fork **140**. The rails **148** prevent the fork **140** and spoon **110** from being separated in the z-direction.

It will be noted that the crescent shape of the raised edge **116** provides additional surface area to abut the end wall **162** to prevent the spoon **110** from sliding past the locked position. When the raised edge **116** engages the space between the detent **152** and the end wall **162**, the spoon **110** and fork **140** are interlocked in the nested position and fairly significant force is required to disengage the spoon **110** and fork **140** from the nested position because the raised edge **116** must move over the top of the detent **152** without the benefit of a gradually sloped face of the detent **152**. It will be understood that greater force is necessary to disengage the spoon from the fork than is required to interlock the utensils in the nested position because the detent **152** is gradually sloped leading to the top of the detent **152** from the center of the distal end of the fork **140** whereas the opposite side of the detent **152** opposite the end wall **162** is more steeply angled, as illustrated. The more gradually sloped face of the detent **152** makes it easier for the raised edge **116** to slide up to the top of the detent **152**. According to an embodiment, the slope of the gradually sloped face of the detent is at an angle of about 15 degrees. The gradually sloped face can also be formed as a curved surface of about 4 mm radius.

As shown in FIGS. **4**F and **4**G, there are two detents **152**, **153** and there is a groove **151** between detent **152** and end wall **162** and there is also a groove **157** between detent **153** and end wall **163**. Each detent has an angled face on both sides. The sides facing together or inward are more gradually sloped, and the sides facing away from each other are steeply sloped. The inward-facing detent angles are more gradually sloped to permit easier nesting of the fork and spoon (as explained above) or extension to form the elongated combination utensil (as explained in more detail below). The outward-facing detent angles are steeper making it more difficult to "un-snap" or disengage the spoon and fork from each configuration.

To disengage the spoon **110** and fork **140** from the interlocked nested position, the spoon **110** and fork **140** can simply be pulled apart from one another in the lateral direction. A particularly convenient way to disengage the spoon **110** and fork **140** from the interlocked nested position is to start with the nested spoon and fork system **100** upside down. Thus, with the bottom of the spoon **110** facing up, a user can hold the handles with a conventional grip while using a thumb to push the bowl **112** toward the distal end to disengage the spoon **110** and fork **140**. With enough force applied, the raised edge **116** of the spoon **110** will move over the nub **152** and the raised edge **116** of the spoon **110** can slide along the recess **150** and the spoon handle **114** can slide between the rails **148** until the raised edge **116** is once again between the rails **148** and the nub **152** closer to the distal portion of the fork **140**. When the raised edge **116** has moved past the rails **148**, the spoon **110** can be disengaged from the fork **140** and separated.

The rails **148** are centered laterally between the detents **152**, **153**, as shown in FIGS. **4**F and **4**G. In the illustrated embodiment, the rails **148** are approximately half the length of the recess **150**. The length as well as the position of the rails **148** along the handle **146** are important for a properly functioning interlocking mechanism. It will be appreciated that the rails **148** need to have a certain length in order to adequately secure the handles **114**, **146** together when the spoon and fork are interlocked. The centering of the rails **148** laterally with respect to the length of the recess **150** and the positioning of the detents **152**, **153** is important to allow for the raised edge **116** of the spoon handle **114** to engage the recess **150** at one end of the recess and also for the raised edge **116** to engage the detent on the other end of the recess **150** to snap the spoon and fork in the interlocked position (whether nested or connected end to end to form a combination utensil).

Elongated Combination Utensil

As mentioned above, the spoon **110** and fork **140** can be connected end to end to form an elongated combination utensil having a fork **140** on one end and a spoon **110** on the other end, with an elongated handle in between. Such an elongated utensil can be useful in certain situations, such as stirring food in a pot or eating out of deep containers or bagged foods.

The elongated combination utensil will be described with reference to FIGS. **6**A-**6**D, which represent various views of the spoon **110** and fork **140** connected end to end to form the elongated combination utensil. The interlocking mechanism for forming the elongated combination utensil is the same as that for the nested position except that it operates in the opposite direction, as explained in more detail below.

To assemble the combination utensil, the fork **140** and spoon **110** are positioned facing opposite directions (with the spoon **110** on one end and the fork **140** on the other end) but with the same orientation (both facing up or both facing down). The raised edge **116** of the spoon **110** is then positioned in the recess **150** between the rails **148** and the detent **152** closer to the proximal end of the fork **140**. The spoon **110** is then slid toward the distal end of the fork **140**, with the crescent-shaped raised edge **116** sliding along the correspondingly shaped recess **150** and the outer edges of the spoon handle **114** between the rails **148**. Once the raised edge **116** abuts the gradually sloped face of the detent **153** closer to the distal end of the fork **140**, additional force is necessary to push the raised edge **116** up along the angled portion of the detent **153** and over the top of the detent **153** until the raised edge **116** engages the groove between the detent **153** and the distal end wall **163** of the recess **150**. With the raised edge **116** engaged in the groove between the detent **153** and the end wall **163**, the spoon **110** and fork **140** are interlocked in the elongated combination utensil position.

It will be understood that the end wall **163** acts as a hard stop, preventing the spoon **110** from being slid further. The end wall **163** prevents the spoon **110** from moving beyond the locked position and the detent **153** prevents the spoon **110** from moving back in the opposite direction to disengage the fork **140**. The rails **148** not only prevent the fork **140** and spoon **110** from being separated in the z-direction, but also prevent the fork and spoon from being separated by bending (both side-to-side and top-to-bottom bending) as well by torsion or twisting forces.

When the raised edge **116** engages the groove between the detent **153** and the distal end wall **163** of the recess **150**, the spoon **110** and fork **140** are interlocked in the combination utensil position and fairly significant force is required to

disengage the spoon **110** and fork **140** from this position. To disengage the spoon **110** and fork **140**, with the spoon **110** and fork **140** are simply pulled apart in the lateral direction. With enough force applied, the gradually sloped face of the detent **153** exerts a normal force on the ends of the handles **114**, **146**, thereby bending them and allowing the raised edge **116** of the spoon **110** to move over the top of the detent **153**. The spoon **110** can then slide along the recess **150** between the rails **148** until the raised edge **116** is once again positioned laterally between the rails **148** and the detent **152** closer to the proximal portion of the fork **140**. When the raised edge **116** has moved laterally past the rails **148**, the spoon **110** can be disengaged from the fork **140** and separated. It will be understood that greater force is necessary to disengage the spoon from the fork than is required to interlock the utensils because the detent **153** is more gradually sloped leading to the top of the detent **153** from the center of the proximal end of the fork **140** whereas the opposite face of the detent **153** opposite the end wall **163** is more steeply sloped. According to an embodiment, the gradually sloped face of the detent is at an angle of about 15 degrees.

As noted above, the spoon **110** and fork **140** are oriented in the same direction (with both heads **141**, **112** facing up or both facing down) when connected end to end such that the combination spoon and fork system **100** has a substantially wide U-shaped configuration, as shown in FIG. **6**D. It will be appreciated that the U-shaped configuration is comfortable for a user to hold and manipulate. With the spoon head **112** and the fork head **141** oriented the same way, the fork head **141** does not get in the way of the user's hand when the combination utensil is being used as a spoon and when the combination utensil is being used as a fork, the spoon head **112** does not get in the way of the user's hand.

Integral Combination Utensil

According to another embodiment, an integral combination fork and spoon utensil **200** is shown in FIGS. **7**A-**7**C. This embodiment is related to concurrently filed U.S. Design application No. 29/484,553, which is incorporated herein by reference. This embodiment is similar to the elongated combination utensil shown in FIGS. **6**A-**6**D except that this embodiment is formed as a single integral unit. The handle **210** is positioned laterally between a spoon **220** on one end and a fork **240** on the other end.

The fork **240** has a head portion **241**, which includes the tines, that is connected to handle **210**. In the illustrated embodiment, the fork **240** has two substantially straight center tines **242**. The two outer tines **244** each have a substantially straight inner edge and a curved outer edge **245**. The curvature of the outer edges **245** can also be used for scraping food from a container, as the curved edges **245** follow the curvature of a curved container, such as a bowl, better than the straight tines of many conventional forks. In the illustrated embodiment, the fork **240** has four tines **242**, **244**. It will be understood that, in other embodiments, the fork can have more or fewer tines. Each tine **242**, **244** has a pointed tip, which aids in spearing or piercing pieces of food so that the food can be picked up by the fork **240**.

In addition to being curved, the outer edges **245** of the two outer tines **244** are also tapered or chamfered such that the fork **240** can be used to cut through or separate foods that do not require a knife. As illustrated in FIG. **7**A, the top surface of each of the outer edges **245** is tapered or chamfered. As illustrated in FIG. **7**A, the top surface of each of the curved outer edges **245** is tapered or chamfered. As illustrated, each chamfered edge **245** has one end at the pointed tip of the outer tine **244** and extends along the outer curved edge of the outer tine **244** to the position where the fork head **241** meets the handle **210**. As shown in FIG. **7**A, the chamfered edge **245** spans the entire width of the outer tine **244** at the pointed tip. As the chamfered edge **245** extends down along the curved outer edge of the outer tine **244**, the width of the chamfered edge **145** remains substantially the same until it begins to taper toward the end of the fork head **241**. In the illustrated embodiment, the chamfered edge **245** tapers and ends in a point where the fork head **241** meets the handle **210**. In a particular embodiment, the outer edges **245** are chamfered at an angle of about 20-25 degrees, and preferably about 23 degrees, and the chamfered edge has a width of about 1 mm. In the illustrated embodiment, the outer edges **245** of both outer tines **244** are chamfered so that both outer edges **245** can easily be used to cut or separate food regardless of whether the user is right-handed or left-handed. In the illustrated embodiment, the center tines **242** are longer than and extend further distally than the outer tines **244**, thereby forming a curve at the distal end of the fork **240** when viewed from the top.

The spoon **220** has a head portion or bowl **212** on its distal end. The bowl **212** of the spoon **220** has a substantially flat side edge **218** and end edge **218***b*, which allows for "scraping" food from of a container (e.g., a yogurt container) or a bowl. As shown in the side view of FIG. **7**C, the bowl **212** is angled upward to form a deeper bowl, which can be more efficient when scooping liquids, such as soups. In a particular embodiment, the bowl **212** is angled upward at an angle of about 20-25 degrees, and preferably about 23 degrees. In the illustrated embodiment, the bowl **212** has a substantially elongated pentagonal shape with rounded corners.

It will be noted that the integral combination fork and spoon utensil **200** can be formed with a handle of any desired length. That is, the handle can be a standard length, or if desired, the handle can be shorter or elongated. In a particular embodiment, the handle has a length of about 165 mm. Similar to the elongated combination utensil described above, the integral combination utensil also has a substantially wide U-shaped configuration with the spoon **210** and fork **240** are oriented in the same direction (with both heads **241**, **212** facing up or both facing down) when connected end to end such that the integral combination spoon and fork system **200** has a substantially wide U-shaped configuration, as shown in FIG. **7**C. As noted above, the substantially U-shaped configuration is comfortable for a user to hold and manipulate. With the spoon head **212** and the fork head **241** oriented the same way, the fork head **241** does not get in the way of the user's hand when the integral combination utensil is being used as a spoon. When the integral combination utensil is being used as a fork, the spoon head **212** does not get in the way of the user's hand.

Although only a few embodiments of the invention have been described in detail, it should be appreciated that the invention may be implemented in many other forms without departing from the spirit or scope of the invention. In view of all of the foregoing, it should be apparent that the present embodiments are illustrative and not restrictive and the invention is not limited to the details given herein, but may be modified within the scope and equivalents of the appended claims.

What is claimed is:

1. A combination fork and spoon system, comprising:

a fork including a fork head and a fork handle, the fork head end including a plurality of tines, the fork handle having a pair of spaced apart fork catch features and a guide portion, wherein a first one of the fork catch

features is closer to a proximal end of the fork handle than a second one of the fork catch features; and

a spoon including a spoon head and a spoon handle, the spoon head including a bowl portion and the spoon handle including a spoon catch feature, wherein the spoon handle is configured to interlock with the fork handle in two distinct orientations with the spoon handle inserted into the guide portion of the fork in two different ways, the two distinct orientations including a nested orientation and an extended orientation, wherein,

in the nested orientation, the fork head and the spoon head are nested together, with the spoon catch feature engaging the first one of the fork catch features and the fork guide portion receiving the spoon handle to help hold the spoon and fork in the nested orientation, and

in an extended orientation, the fork head and the spoon head extend in opposite directions with the spoon catch feature engaging the second one of the fork catch features and the fork guide portion receiving the spoon handle to help hold the spoon and fork in the extended orientation.

2. A combination fork and spoon system as recited in claim **1**, wherein the fork and spoon are formed from a thermoplastic material.

3. A combination fork and spoon system as recited in claim **2**, wherein the thermoplastic material is a glass filled nylon.

4. A combination fork and spoon system as recited in claim **1**, wherein:

the first one of the fork catch features is arranged to engage the spoon catch feature when the spoon and fork are coupled in the nested orientation, but not when the spoon and fork are coupled in the extended orientation; and

the second one of the fork catch features is arranged to engage the spoon catch feature when the spoon and fork are coupled in the extended orientation, but not when the spoon and fork are coupled in the nested orientation.

5. A combination fork and spoon system as recited in claim **1**, wherein the fork head includes a concave bowl portion, wherein the spoon head bowl portion and the fork head concave bowl portion both face in a same direction in the nested orientation.

6. A combination fork and spoon system as recited in claim **1**, wherein at least one of the tines on an outer edge of the fork head has a splitting feature.

7. A combination fork and spoon system as recited in claim **1**, wherein none of distal tips of the tines extends longitudinally beyond a distal tip of an outer edge of the spoon head bowl portion when the fork and spoon are in the nested orientation.

8. A combination fork and spoon system as recited in claim **7**, wherein the spoon head bowl portion is wider than the fork head such that outer edges of outer ones of the tines do not extend beyond the spoon head bowl portion in the nested orientation.

9. A combination fork and spoon system as recited in claim **1**, wherein the bowl portion of the spoon has a plurality of substantially flat side edges.

10. A combination fork and spoon system as recited in claim **9**, wherein the plurality of substantially flat side edges comprises at least three substantially flat side edges with rounded corners therebetween.

11. A combination fork and spoon system as recited in claim **1**, wherein a distal tip of the bowl portion of the spoon is positioned at an angle relative to the handle of the spoon.

12. A combination fork and spoon system as recited in claim **1**, wherein:

the plurality of tines includes four tines including two inner tines and two outer tines;

the inner tines each have a pair of substantially straight and substantially parallel side edges and a pointed distal tip; and

the outer tines each include a curved outer edge and a pointed distal tip.

13. A combination fork and spoon system as recited in claim **1**, wherein the tines include a pair of outer tines, wherein at least one of the outer tines has a chamfered outer edge.

14. A combination fork and spoon system as recited in claim **1**, wherein the spoon handle is configured to be a splitter or a cutter.

15. A combination fork and spoon system as recited in claim **1**, wherein the spoon handle is configured to be slid longitudinally through the fork guide portion with the spoon handle extending in parallel with the fork handle.

16. A combination fork and spoon system as recited in claim **1**, wherein the fork guide portion comprises a pair of rails arranged to extend around at least a portion of opposing side edges of the spoon handle to help maintain alignment of the spoon and fork handles in both the nested and extended orientations.

17. A combination fork and spoon system as recited in claim **1**, wherein opposing side edges of the spoon handle key into the fork guide portion to help maintain alignment of the spoon and fork handles in both the nested and extended orientations.

18. A combination fork and spoon system, comprising:

a fork including a fork head and a fork handle, the fork head end including a concave bowl portion, and a plurality of tines that include a pair of outer tines, each tine having a proximal base and a distal tip, wherein outer edge portions of the fork head are curved longitudinally wherein each outer edge portion of the fork head comprises an outer edge of a respective one of the outer tines such that the outer tines get progressively narrower towards their respective distal tips, the fork handle having a pair of spaced apart fork catch features and a guide portion, wherein a first one of the fork catch features is closer to a proximal end of the fork handle than a second one of the fork catch features; and

a spoon including a spoon head and a spoon handle, the spoon head including a concave bowl portion and the spoon handle including a spoon catch feature, wherein the spoon is configured to interlock with the fork in a nested orientation by sliding the spoon handle into the guide portion of the fork in a first direction, and wherein the spoon is configured to interlock with the fork in an extended orientation by sliding the spoon handle into the guide portion of the fork in a second direction, wherein the nested orientation and the extended orientation are two distinct orientations, wherein,

(i) in the nested orientation, the fork head and the spoon head are nested together, with the spoon catch feature engaging the first one of the fork catch features and the fork guide portion receiving the spoon handle to help hold the spoon and fork in the nested orientation, and

(ii) in the extended orientation, the fork head and the spoon head extend in opposite directions with the spoon catch feature engaging the second one of the fork catch features and the fork guide portion receiving the spoon handle to help hold the spoon and fork in the extended orientation; and

wherein the spoon catch feature is configured to engage one of the fork catch features to help align the spoon and fork in a selected one of the orientations; and

wherein the fork and spoon are formed from a glass reinforced thermoplastic material.

19. A combination fork and spoon system as recited in claim **18**, wherein a distal tip of the bowl portion of the spoon head is tilted at a first angle relative to the spoon handle, and a distal tip of the bowl portion of the fork head is tilted at a second angle relative to the fork handle.

20. A combination fork and spoon system as recited in claim **18**, wherein:

the plurality of tines further include two inner tines each having a pair of substantially straight side edges;

an inner edge of each of the outer tines is substantially straight; and

the distal tip of each of the plurality of tines is pointed.

21. A combination fork and spoon system as recited in claim **18**, wherein the spoon handle has a chamfered outer edge.

* * * * *