



US 20090042344A1

(19) **United States**

(12) **Patent Application Publication**
Ye et al.

(10) **Pub. No.: US 2009/0042344 A1**

(43) **Pub. Date: Feb. 12, 2009**

(54) **INP-BASED TRANSISTOR FABRICATION**

(22) Filed: **Jun. 13, 2008**

(75) Inventors: **Peide Ye**, West Lafayette, IN (US);
Zhiyuan Cheng, Lincoln, MA (US); **Yi Xuan**, West Lafayette, IN (US); **Yanqing Wu**, West Lafayette, IN (US); **Bunmi Adekore**, Medford, MA (US); **James Fiorenza**, Wilmington, MA (US)

Related U.S. Application Data

(60) Provisional application No. 60/934,716, filed on Jun. 15, 2007.

Publication Classification

(51) **Int. Cl.**

H01L 21/335 (2006.01)

H01L 21/336 (2006.01)

(52) **U.S. Cl. 438/172; 438/285; 257/E21.409; 257/E21.403**

Correspondence Address:


GOODWIN PROCTER LLP
PATENT ADMINISTRATOR
53 STATE STREET, EXCHANGE PLACE
BOSTON, MA 02109-2881 (US)

(73) Assignees: **AmberWave Systems Corporation**, Salem, NH (US);
Purdue Research Foundation, West Lafayette, IN (US)


(57) **ABSTRACT**

Methods of forming structures that include InP-based materials, such as a transistor operating as an inversion-type, enhancement-mode device. A dielectric layer may be deposited by ALD over a semiconductor layer including In and P. A channel layer may be formed above a buffer layer having a lattice constant similar to a lattice constant of InP, the buffer layer being formed over a substrate having a lattice constant different from a lattice constant of InP.

(21) Appl. No.: **12/139,010**

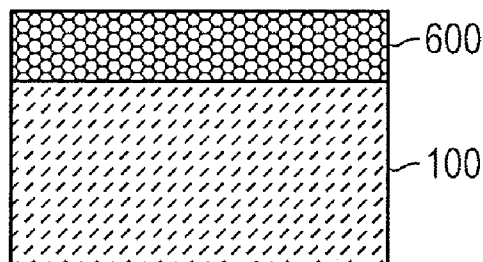

a)

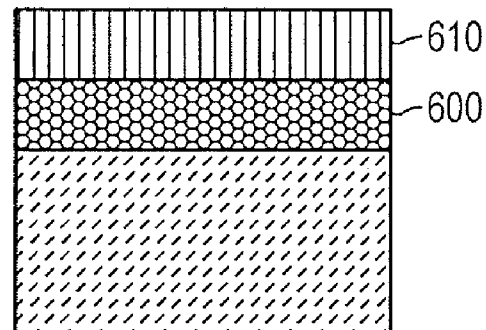

b)

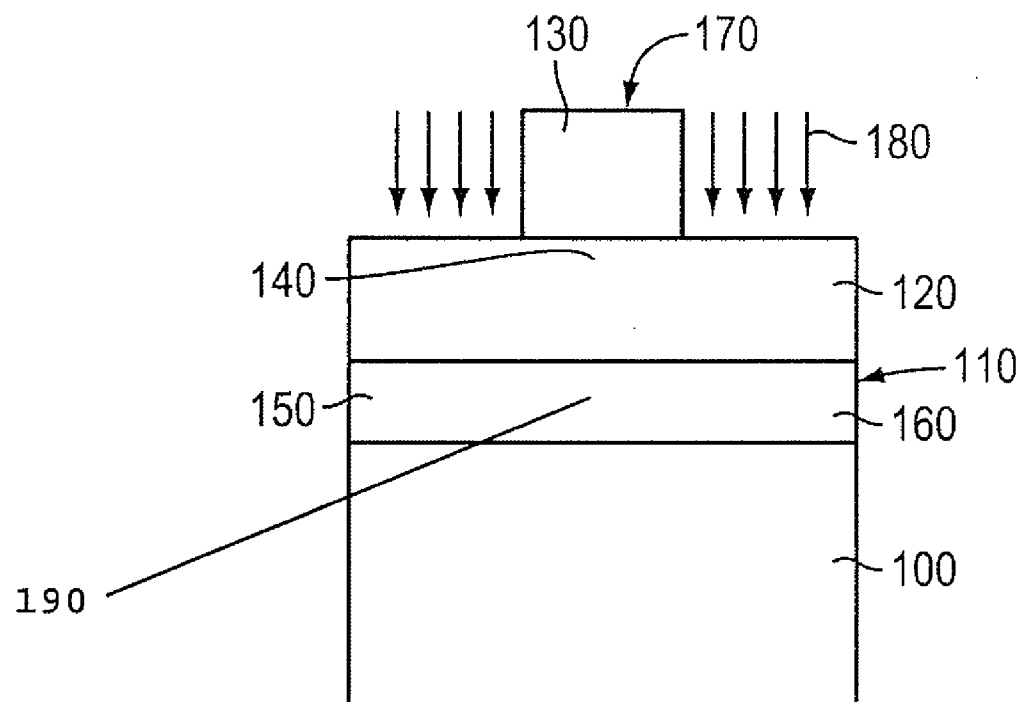


FIG. 1A

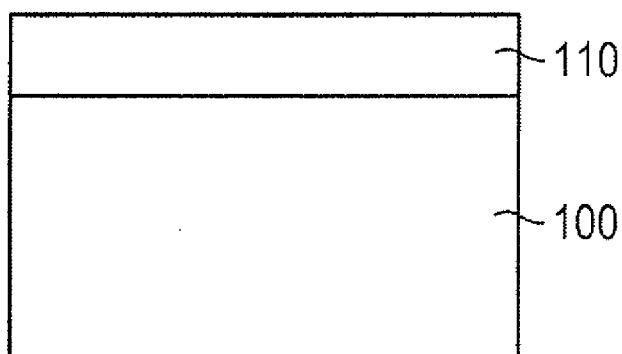


FIG. 1B

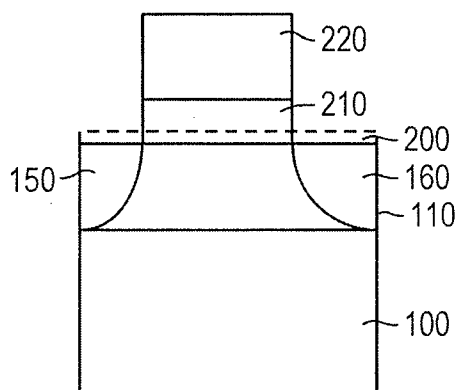


FIG. 2A

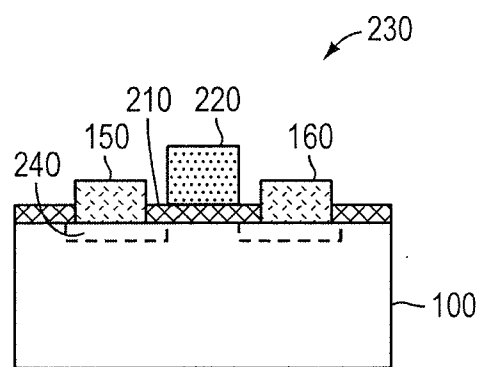


FIG. 2B

- SURFACE CLEAN AND PRETREATMENT $(\text{NH}_4)_2\text{S}$
- DEPOSITION OF 30 nm Al_2O_3 USING ALD
- ION IMPLANTATION (Si 35Kev, $1 \times 10^{14}/\text{cm}^2$)
- ACTIVATION USING RTA 720 °C FOR 10 sec
- FOR REGROWN OXIDE, ETCH AWAY OXIDE USING BHF AND REGROW 8 nm Al_2O_3 OR HfO_2 OR HfAlO AND PDA
- S/D REGION PATTERNING AND METAL DEPOSITION AuGe/Ni/Au AND RTA
- GATE REGION PATTERNING AND METAL DEPOSITION Ni/Au

FIG. 2C

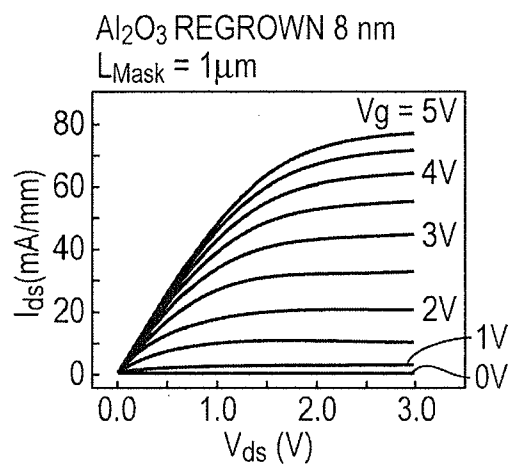


FIG. 2D

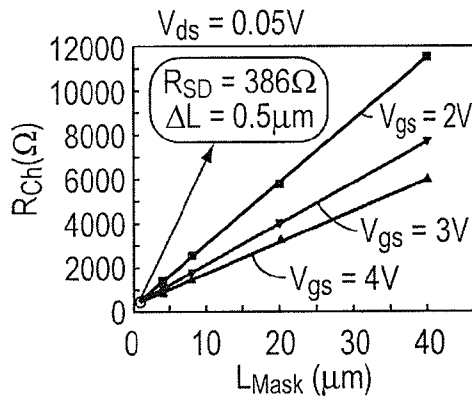


FIG. 2E

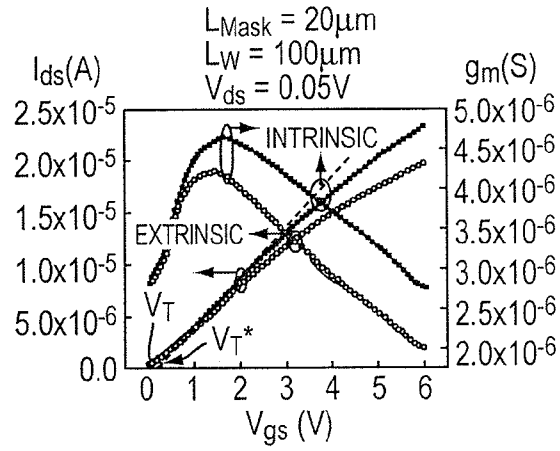


FIG. 2F

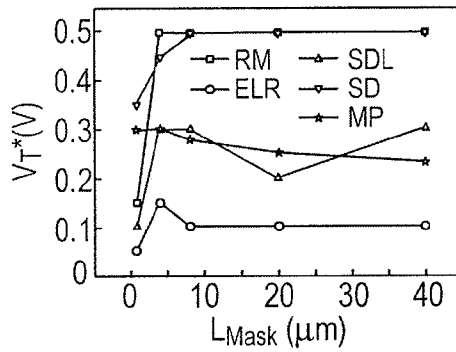


FIG. 2G

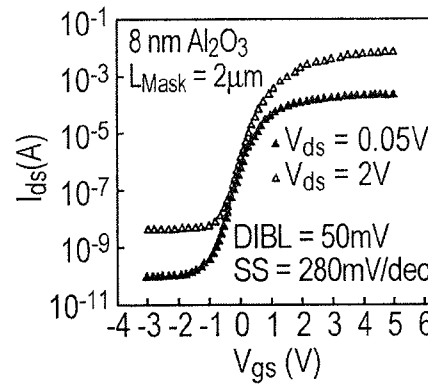


FIG. 2H

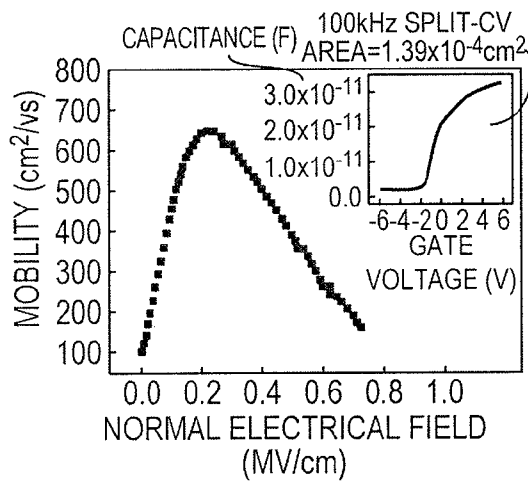


FIG. 2I

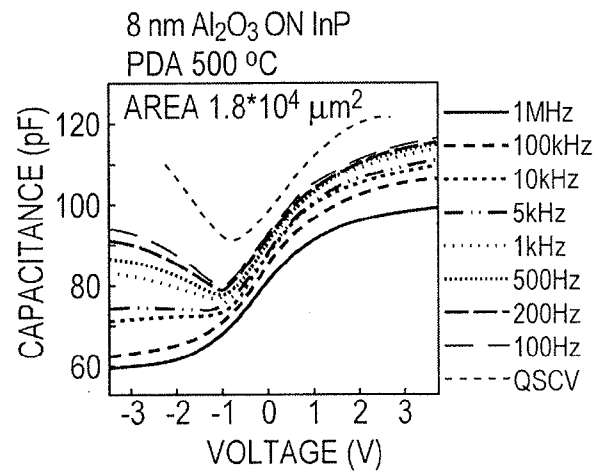


FIG. 2J

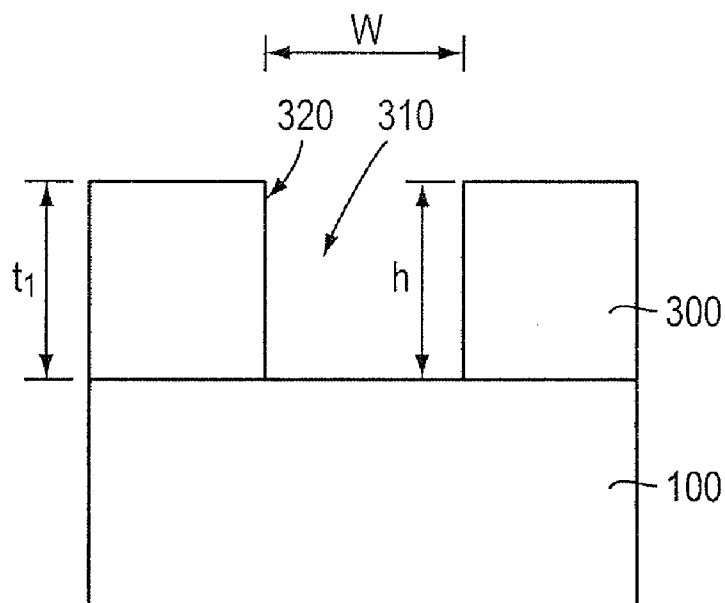


FIG. 3A

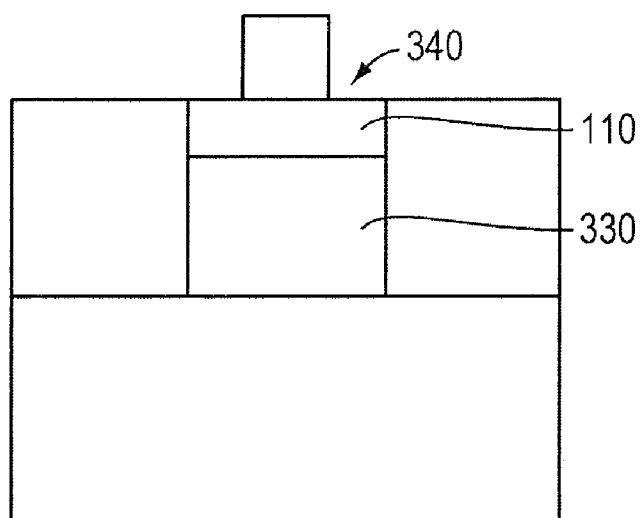


FIG. 3B

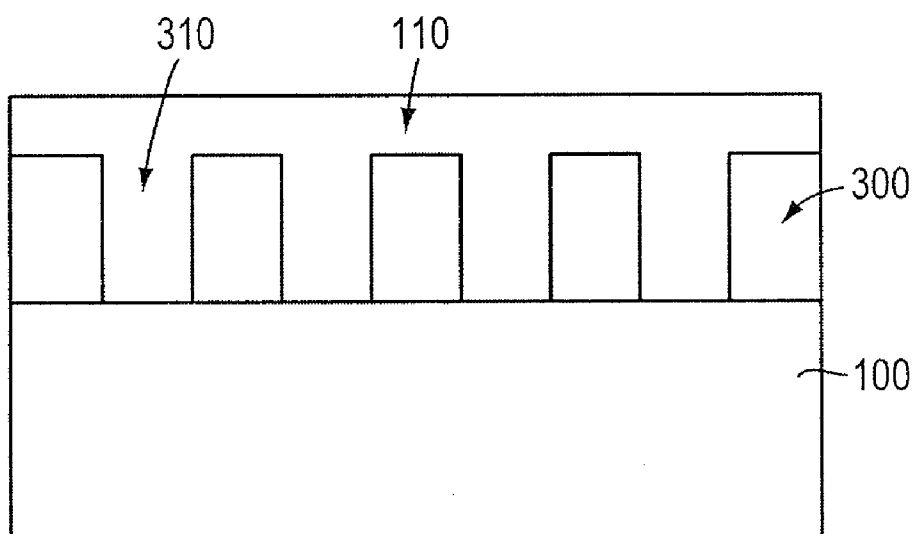


FIG. 3C

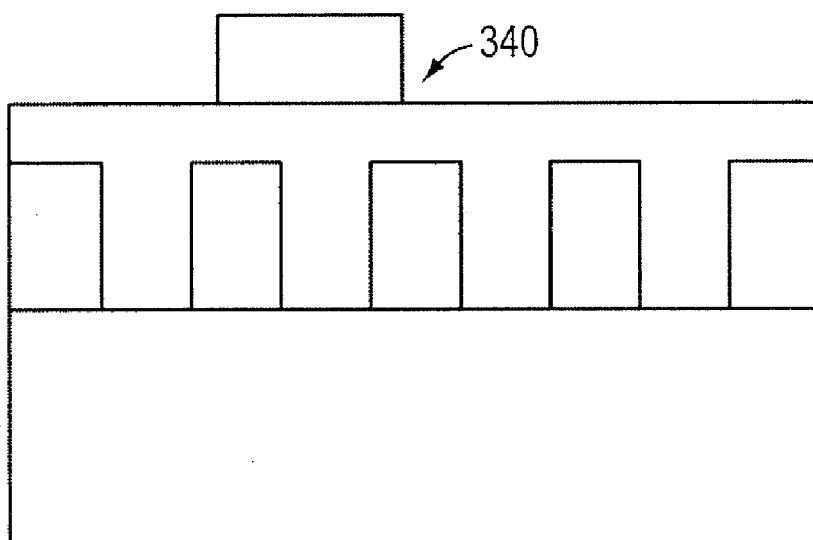


FIG. 3D

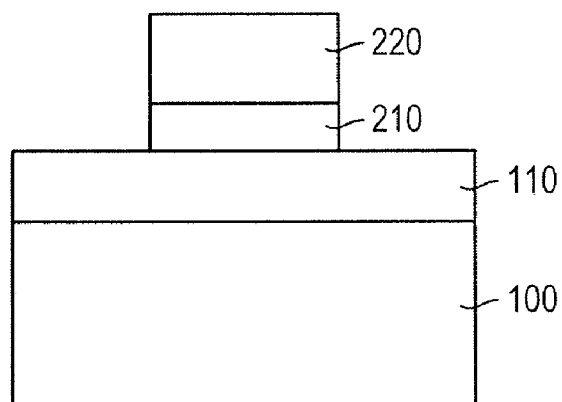


FIG. 4A

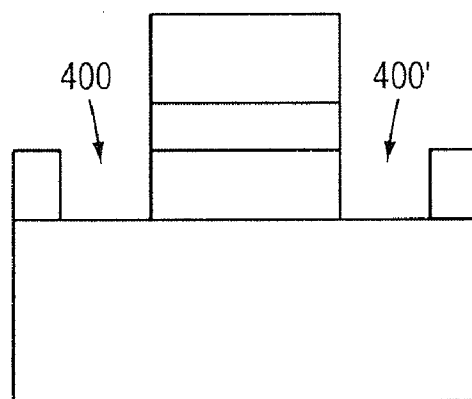


FIG. 4B

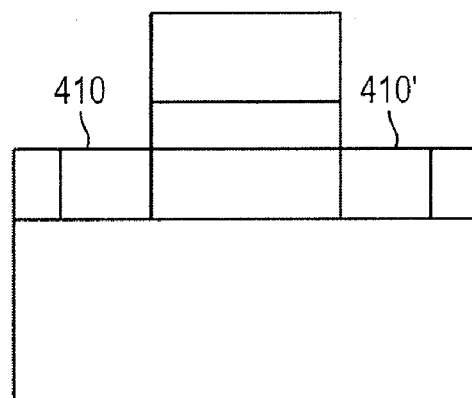


FIG. 4C

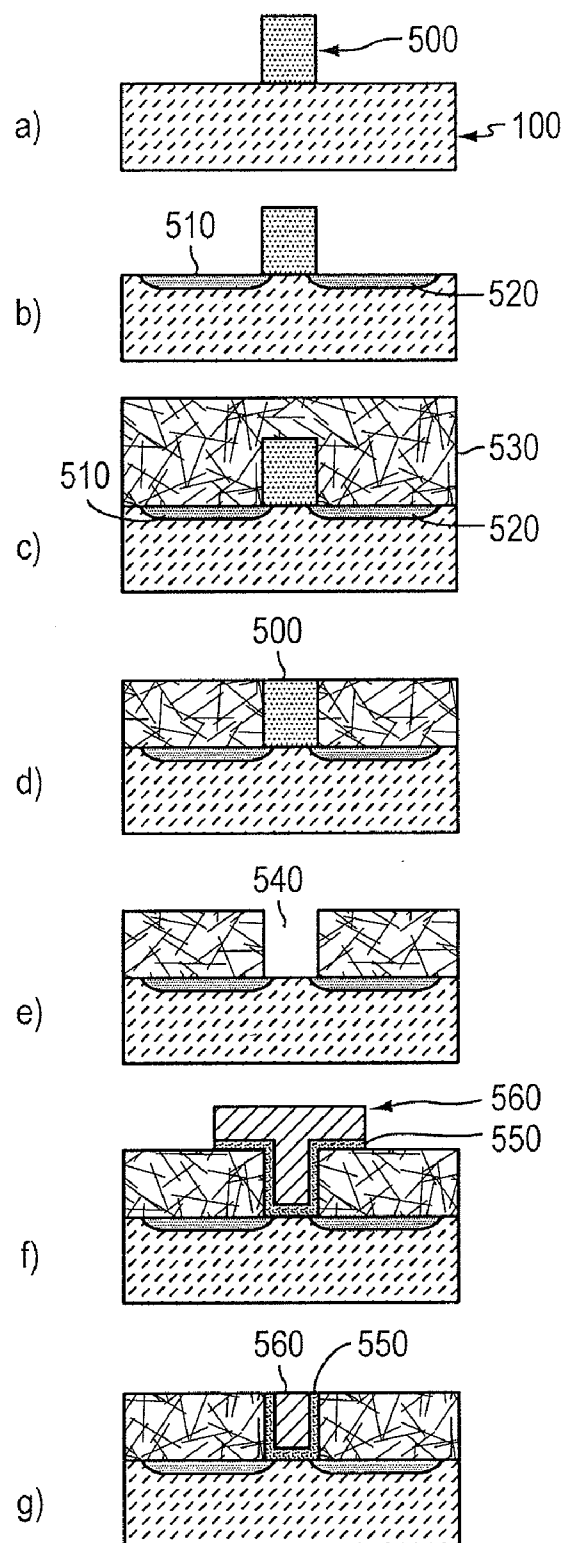


FIG. 5

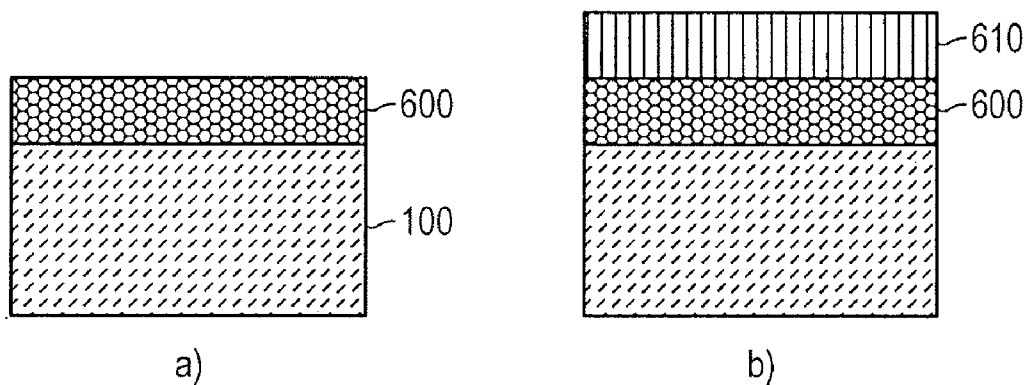


FIG. 6

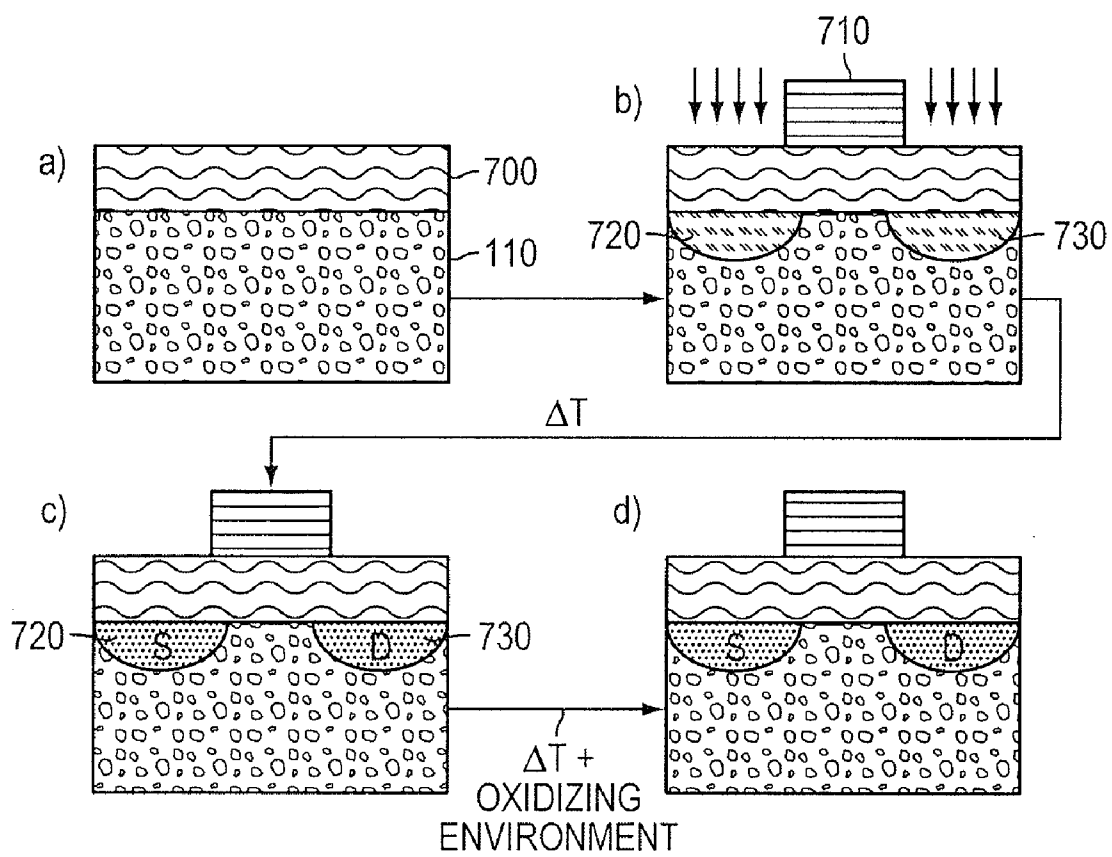


FIG. 7

INP-BASED TRANSISTOR FABRICATION

RELATED APPLICATION

[0001] This application claims the benefit of and priority to U.S. Provisional Application Ser. No. 60/934,716, filed Jun. 15, 2007, the entire disclosure of which is incorporated by reference herein.

TECHNICAL FIELD OF THE INVENTION

[0002] The technology disclosed herein relates generally to semiconductor structures and methods of making semiconductor structures and more specifically to use of alternatives to Si for constructing transistors using InP-based materials.

BACKGROUND

[0003] The increasing operating speeds and miniaturization of semiconductor devices have given rise to a need to find alternatives to silicon for the source, drain, and channel regions of transistors and to SiO₂ for the gate dielectric of FET transistors. Research has been performed on compound semiconductors such as GaAs and other III-V materials for high-performance transistor applications. Although there have been successful demonstrations of depletion-mode GaAs metal-oxide-semiconductor field-effect transistors (MOSFETs), inversion-type enhancement-mode GaAs MOSFETs have suffered from problems such as relatively low drain currents. Notwithstanding research and development efforts by many institutions into aspects of III-V materials, there remains a need for commercially viable techniques for providing improved performance using materials such as InP.

SUMMARY

[0004] According to aspects of embodiments of the invention described below, atomic layer deposition (ALD) techniques with high-k gate dielectrics are used to provide inversion-type enhancement-mode InP-based MOSFETs that demonstrate substantial technological improvements. For example, drain currents for InP devices described below may have drain currents more than 1,000 times greater than drain currents for existing enhancement-mode GaAs MOSFETs. Other aspects include improved performance with respect to Fermi level pinning and higher electron saturation velocity (2×10⁷ cm/s). At equivalent gate lengths, aspects of the embodiments described below can provide high-field transconductance greatly improved (>50% higher) in comparison to devices having equivalent channel lengths and fabricated with more conventional semiconductors such as Si, Ge, or GaAs. The ALD high-k/InP-based material system mitigates problems associated with Fermi-level pinning reported in the literature.

[0005] Provision of high-performance InP-based MOSFETs may enable a new generation of high-frequency transistors because of the intrinsically higher and robust charge-transport properties of InP-based materials relative to other semiconducting materials. The presence of a gate dielectric in MOSFET structures reduces overall device leakage and enhances both control and responsivity of channel regions. The need for gate dielectric materials suitable for use with InP, and methods for formation thereof, has hitherto limited the commercialization of InP-based MOSFETs. Previous efforts focused on the deposition of dielectric materials on InP have resulted in various difficulties including interfacial

chemical instabilities, electronic instabilities such as Fermi-energy pinning, and device fabrication difficulties involving high series-resistance source and drain terminals. Embodiments of the present invention provide techniques enable the fabrication of commercially viable InP-based MOSFETs, a long-sought but yet-to-be-achieved goal.

[0006] In an aspect, an embodiment of the invention includes a method of fabricating a transistor. An InP-based material layer structure including a channel layer is provided. A source region and a drain region are defined in the InP-based material layer structure. A channel region is provided between the source and drain regions, the channel region including at least a portion of the channel layer. A gate dielectric is deposited over the channel region by atomic layer deposition (ALD). A gate is provided above the channel region. At least a portion of the gate dielectric may be disposed between the gate and the channel region, and the transistor may operate as an inversion-type, enhancement-mode device.

[0007] One or more of the following features may be included. The source and drain regions are at least partially disposed in the channel layer. The source and drain regions are disposed above the channel layer. The gate dielectric comprises at least one of a group II material and/or a transition metal, e.g., includes at least one of aluminum, Al₂O₃, hafnium, and/or HfO. The channel layer may include a strained region. The channel layer may include at least one of InSb, InGaAs, InAs, and/or InP. The channel layer may include a plurality of substantially lattice-matched layers.

[0008] The transistor may be, e.g., a MOSFET or a HEMT. The InP-based material layer may be provided over a silicon substrate.

[0009] In another aspect, an embodiment of the invention includes a method of fabricating a transistor. An InP-based material layer including a channel layer is provided. A source region and a drain region are defined in the InP-based material layer. A channel region is provided between the source and drain regions, the channel region including at least a portion of the channel layer. A gate dielectric is formed over the channel region, the gate dielectric including at least one of a group II material or a transition metal. A gate is provided above the channel region. At least a portion of the gate dielectric may be disposed between the gate and the channel region, and the transistor may operate as an inversion-type, enhancement-mode device.

[0010] One or more of the following features may be included. The gate dielectric may include aluminum and/or hafnium. The gate dielectric is formed by ALD.

[0011] In still another aspect, an embodiment of the invention includes a method of fabricating a semiconductor structure. A semiconductor layer comprising indium and phosphorous is provided. A dielectric layer comprising hafnium is deposited by ALD above at least a portion of the semiconductor layer. A conductive layer is provided over at least a portion of the dielectric layer. The dielectric layer is disposed between the semiconductor layer and the conductive layer.

[0012] One or more of the following features may be included. The semiconductor layer includes a transistor channel region and the conductive layer including a transistor gate region. The dielectric layer may include at least one of oxygen, silicon, and/or nitrogen. The semiconductor layer is provided over a substrate that includes silicon.

[0013] In another aspect, an embodiment of the invention includes a semiconductor structure. The structure includes a

silicon substrate. An InP-based material layer structure including a channel layer is disposed above the substrate. A transistor including a source region, a drain region, and an inversion-type channel region may be disposed at least partially within the channel layer, and a gate region is disposed above the channel region.

[0014] One or more of the following features may be included. A mask layer is disposed above the substrate and includes a plurality of openings; a second layer of material having a lattice-mismatch with silicon is disposed within the openings. The second layer may include indium and phosphorous.

[0015] A dielectric layer is disposed between the channel region and the gate region, the dielectric layer including at least one of aluminum and/or hafnium. The channel layer includes a strained region. The channel layer includes at least one of InSb, InGaAs, InAs, and/or InP. The channel layer includes a plurality of substantially lattice-matched layers.

[0016] In still another aspect, an embodiment of the invention includes a method of making a semiconductor structure. A substrate including a top layer having a compound comprising indium and a second element is provided. A dielectric layer is provided over the top layer, a region of the dielectric layer adjacent the top layer being substantially non-reactive with indium and the second element and configured to suppress out-diffusion of dopants from the top layer during a thermal anneal step. A dopant species is implanted into the top layer. The top layer is thermally annealed to activate the dopant at a relatively high temperature.

[0017] One or more of the following features may be included. The second element is phosphorous, antimony, aluminum, gallium, and/or arsenic. Implanting a dopant species into the top layer includes implanting the dopant species through the dielectric layer. The dielectric layer includes first and second layers, the first layer being adjacent the top layer and substantially non-reactive with indium and the second element, the first layer having a first composition and the second layer having a second composition different from the first composition. The second layer includes oxygen, aluminum, and/or hafnium. The substrate includes a bottom portion including silicon.

[0018] In another aspect, an embodiment of the invention includes a method of forming a transistor. The method includes providing a substrate including a top layer disposed thereover, the top layer including a compound comprising indium and a second element. A dielectric layer is deposited above the top substrate layer by atomic layer deposition. A mask layer may be disposed above the dielectric layer to define a gate region, a source region, and a drain region of a transistor. A dopant is implanted through the dielectric layer into the source region and the drain region proximate the gate region, the mask layer blocking implantation of the dopant into the gate region. A high temperature anneal is performed to activate the dopant in the source and drain regions.

[0019] One or more of the following features may be included. The substrate includes a bottom portion including silicon. Implanting a dopant through the dielectric layer to define the source and drain regions substantially amorphizes the source and drain regions. The high temperature anneal recrystallizes the source and drain regions. A portion of the mask layer is replaced with a gate structure without lithography so that the gate structure is aligned to the source and drain regions. A substantially lattice-matched layer is provided atop the substrate in which the source and drain regions are

formed. The layer may include at least one of InSb, InGaAs, InAs, and/or InP; the layer may include a plurality of substantially lattice-matched layers.

[0020] In another aspect, an embodiment of the invention includes a method of forming a transistor. A substrate including indium and phosphorous is provided. A mask layer is disposed above the substrate to define a gate region of a transistor. A dopant is implanted to create source and drain regions, with the mask layer blocking implantation of the dopant into the gate region. A portion of the mask layer is replaced with a gate structure without lithography so that the gate structure is aligned to the source and drain regions.

[0021] One or more of the following features may be included. The substrate includes a bottom portion including silicon. Implanting a dopant substantially amorphizes the source and drain regions. A high temperature anneal is performed to activate the dopant and to recrystallize the source and drain regions.

[0022] A high temperature anneal is performed to activate the dopant in the source and drain regions. The gate structure includes a dielectric layer created after performing a high temperature anneal to activate the dopant.

[0023] In yet another aspect, an embodiment of the invention includes a method of forming a transistor. A substrate comprising indium and phosphorous is provided. A mask is provided above the substrate to define source, drain, and gate regions of a transistor. A dopant is implanted into the source and drain regions. At least a portion of the source and drain regions is amorphized. An anneal is performed to recrystallize the amorphized portions of the source and drain regions.

[0024] One or more of the following features may be included. The substrate includes a bottom portion comprising silicon. The substrate includes a top layer comprising indium and phosphorous, InP, InSb, InGaAs and/or InAs. A barrier layer in contact with a top portion of the substrate is provided. A region of the barrier layer in contact with the top portion of the substrate is substantially free of oxygen and/or includes nitrogen. The barrier layer includes at least one of AlN, TaN, and/or TiN.

[0025] The barrier layer includes a dielectric layer relatively inert to the top portion and the dielectric layer is formed by atomic layer deposition. A second dielectric layer is provided above the dielectric layer, with the second dielectric layer being not inert to the top portion of the substrate.

[0026] The barrier layer is oxidized to improve a dielectric property of the barrier layer. The steps of implanting and amorphizing include a single step of implanting a dopant that amorphizes at least a portion of the source and drain regions. The dopant includes SiX, with X including a group VIIA element. Ohmic contacts adjacent the source and drain regions are defined.

[0027] In still another aspect, an embodiment of the invention includes forming a transistor. A substrate including indium and phosphorous is provided. A mask layer may be formed above the substrate to define a source region, a drain region, and a gate region of a transistor. A dopant is implanted into the source and drain regions, the mask layer blocking implantation of the dopant into the gate region. The mask layer is removed to expose the gate region. At least a portion of a channel layer is epitaxially grown.

[0028] One or more of the following features may be included. The portion of the channel layer is epitaxially grown by ALD, MBE, or CVD. Epitaxially growing at least a portion of the channel layer includes growing one or more of

InSb, InGaAs, InAs, and/or InP. The gate channel includes indium and phosphorous; indium and antimony; indium and arsenic; and/or gallium and arsenic.

[0029] The substrate includes a top surface prior to the step of forming the mask layer, the gate channel layer includes a top surface, and the top surface of the gate channel layer is disposed above the top surface of the substrate. The substrate includes a top surface prior to the step of forming the mask layer, the gate channel layer includes a bottom surface, and the bottom surface of the gate channel layer is disposed below the top surface of the substrate.

[0030] In yet another aspect, an embodiment of the invention includes a method of forming a transistor. The method includes providing a substrate including indium and phosphorous. A mask layer may be disposed above the substrate to define source, drain, gate, and gate channel regions of a transistor. A first dopant type is provided in the gate channel region. A portion of the substrate in the source and drain regions may be removed to form source and drain recesses. The source and drain recesses are filled with a semiconductor material having a second dopant type different from the first dopant type.

[0031] One or more of the following features may be included. The second dopant type is opposite from the first dopant type. Filling the source and drain recesses includes an epitaxial growth technique, e.g., at least one of MBE, ALD, and CVD. Filling the source and drain recesses includes filling the source and drain recesses with a material having a lattice constant different from a lattice constant of the substrate and the material induces stress in the channel region. The semiconductor material includes at least one of GaAs, InGaAs, In-rich InGaAs, or InP.

[0032] In another aspect, an embodiment of the invention includes a method of fabricating a transistor. A crystalline substrate having a first lattice constant substantially different from a lattice constant of InP is provided. A non-crystalline mask is provided above the substrate, the mask including an opening having sidewalls that extend above the substrate by a height. A crystalline buffer layer having a second lattice constant substantially similar to the lattice constant of InP may be provided within the opening. The buffer layer may have a height less than the mask opening sidewall height, the buffer layer height being sufficient to permit defects arising from the lattice mismatch to exit the buffer layer at the mask opening sidewalls. A channel layer is provided above the buffer layer, the channel layer being substantially lattice-matched with the buffer layer. A source region, a drain region, and a channel region of a transistor are defined in the channel layer. A gate is provided above the channel layer.

[0033] One or more of the following features may be included. The substrate is a silicon substrate. The mask includes SiO₂. The buffer layer includes a III-V material, e.g., InP. The channel layer includes at least one of InP, InSb, InGaAs, InAs, and/or InP. The channel layer is disposed within the mask opening. The channel layer is disposed substantially completely above the mask. The transistor is an inversion-type, enhancement-mode transistor.

[0034] In another aspect, an embodiment of the invention includes a method of processing a semiconductor structure. A substrate comprising indium and phosphorous is provided. Oxide from a top surface of the substrate is removed using at least one of HF, HCl, and NH₄OH. The top surface is passivated using at least one of an (NH₄)₂S or an OH-group compound.

[0035] The removing and passivating steps may be performed in situ or performed ex situ.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] FIGS. 1(a)-(b) are schematic cross-sectional views illustrating an embodiment of the invention including the implantation and anneal of source and drain regions through a layer that is subsequently removed;

[0037] FIGS. 2(a)-(j) are schematic cross-sectional views of enhancement-mode InP MOSFETs fabricate in accordance with embodiments of the invention, and charts describing experimental procedures and data obtained for enhancement-mode InP MOSFETs;

[0038] FIGS. 3(a)-(d) are schematic cross-sectional views illustrating the fabrication of InP-based devices on lattice-mismatched substrates such as silicon, in accordance with an embodiment of the invention;

[0039] FIGS. 4(a)-(c) are schematic cross sectional views illustrating fabrication of an enhancement-type InP MOSFET, in accordance with an embodiment of the invention;

[0040] FIGS. 5(a)-(g) are schematic cross-sectional views illustrating a method of making a self-aligned gate structure for an InP-based MOSFET, according to an embodiment of the invention;

[0041] FIGS. 6(a)-(b) are schematic cross-sectional views illustrating dielectric layers deposited on an InP substrate; and

[0042] FIGS. 7(a)-(d) are schematic cross sectional views illustrating a method of implantation and amorphization of source and drain regions through a diffusion/barrier layer and subsequent recrystallization of the source and drain regions and oxidation to improve the layer's dielectric properties.

DETAILED DESCRIPTION

[0043] Aspects of this invention address, among other things, the challenges of forming a high-quality interface between a gate dielectric and InP and other InP-based materials through the use of ALD. See also Y. Q. Wu, et al., "Inversion-type enhancement-mode InP MOSFETs with ALD Al₂O₃, HfO₂ and HfAlO nanolaminates as high-k gate dielectrics," *Proceedings of 65th Device Research Conference*, Notre Dame, USA (2007) and Y. Q. Wu, et al., "Enhancement-mode InP n-channel metal-oxide-semiconductor field-effect-transistors with atomic-layer-deposited Al₂O₃ dielectrics," *Applied Physics Letters* 91, 022108-022110 (2007), incorporated by reference herein in their entireties.

[0044] Referring to FIG. 1(a), a semiconductor substrate **100** has an InP-based top layer **110** disposed thereover. In various embodiments, a portion of this InP layer may be used to form a channel for a transistor. The substrate **100** may include a semiconductor material and may be, for example, a bulk silicon wafer, a bulk germanium wafer, a semiconductor-on-insulator (SOI) substrate, or a strained semiconductor-on-insulator (SSOI) substrate. The substrate **100** may include or consist essentially of a first semiconductor material, such as a group IV element, e.g., germanium or silicon. In an embodiment, the substrate **100** includes or consists essentially of (**100**) silicon. In some embodiments, the substrate **100** is an InP substrate, with a top region of the InP substrate defining the InP-based top layer **110**.

[0045] The InP-based top layer **110** may be formed by molecular beam epitaxy (MBE), a chemical vapor deposition

(CVD) process, e.g., metalorganic CVD (MOCVD), or other deposition techniques on the substrate **100**. In an embodiment in which the InP-based top layer **110** is InP disposed over an InP substrate, the top layer may have a thickness ranging from, e.g., 1 nm to 100 μm . In an embodiment, the composition and lattice constant of the InP-based top layer **110** is different from the composition and lattice constant of the substrate **100**. In a preferred embodiment, the thickness of the InP-based top layer **110** is below its critical thickness and the InP-based top layer **110**, i.e., the channel layer, may include a strained region. For example, with a lattice-mismatch of 5%, the critical thickness is about 15 nm, and the InP-based top layer **110** preferably has a thickness less than 15 nm. In other embodiments, the thickness of the InP-based top layer **110** is greater than the critical thickness and the layer is at least partially relaxed. In an embodiment, the InP-based top layer **110** is relaxed.

[0046] In alternative embodiments, one or more layers of materials that are substantially lattice-matched to InP, such as InAlAs or InGaAs, or thin layers of non-lattice-matched III-V compounds, such as GaAs, InSb or InAs, are provided above the InP-based top layer **110** for use in forming transistor source, drain, and/or channel regions. Such thin layers of non-lattice-matched III-V compounds may be strained, which may result in enhanced performance characteristics such as improved electron and/or hole mobility. As used herein, “substantially lattice-matched to InP” means having a lattice constant difference with a lattice constant of InP of no greater than about 10%, preferably no greater than about 5%. To maintain strain in non-lattice-matched III-V compounds, such as GaAs, InSb, and InAs, the thickness of such layers is preferably less than about 10 nm.

[0047] As used herein, the term “InP-based materials” is used to refer to compositions that include or consist essentially of InP and may include additional elements. As used herein, “InP-based material layer structure” is used to refer to an InP layer or InP-based layer alone or in combination with one or more layers that are substantially lattice matched to InP or in combination with thin, strained, non-lattice-matched III-V layers.

[0048] To prevent damage to the top layer during ion implantation, such as when creating transistor source and drain regions, an encapsulation protection layer **120**, i.e., a dielectric layer, is disposed on the top surface of the InP-based top layer **110**. This protection layer allows implantation therethrough while preventing damage of the InP-based top layer. Examples of a suitable protection layer include a SiO_2 or SiN layer deposited by a CVD process, e.g., MOCVD, or an Al_2O_3 layer or a nanolaminate layer, including a material such as HfO_2 and/or HfAlO , deposited by ALD. A mask **130** is formed above the protection layer, and used to define a gate region **140**, a source region **150** and a drain region **160** for a transistor. The mask forms a dummy gate structure **170**, which serves as a hard mask for a subsequent ion implantation step. The mask may be formed from a suitable masking material, such as a dielectric material, e.g., Si_3N_4 , in accordance with methods known to one of skill in the art.

[0049] The source and drain regions **150**, **160** are defined in the InP-based top layer by performing an appropriate source/drain dopant ion implantation **180**, using conventional techniques known to those of skill in the art, taking into account the composition of the protection layer. A channel region **190** is provided between the source and drain regions and includes at least a portion of the InP-based top layer **110**, i.e., the

channel layer. An anneal is then performed at a suitably high temperature to activate the implanted dopant, for example between about 600 and 900° C. with rapid thermal processing (“RTP”). The encapsulation protection layer protects the InP-based material surface during the implantation and anneal processes.

[0050] The encapsulation protection layer and the dummy gate structure may be removed after the implantation and anneal steps to create a device-ready InP-based top layer **110** as shown in FIG. 1(b). Optionally, to improve the surface quality of the InP-based top layer prior to device fabrication, a portion of its top surface may be removed to ensure the elimination of any portion that is or may be damaged. Another optional method to improve the quality of the InP-based top layer **110** is to provide an additional protective/sacrificial cap layer (not shown) on the top surface InP-based top layer **110** before forming the protection layer **120**, for example, a passivation layer including one or more materials such as S, NH_4OH , amorphous Si, and/or amorphous Ge.

[0051] Subsequently, the surface of the InP-based top layer **110** is cleaned, and a high-quality gate dielectric layer (not shown) is deposited by, e.g., an ALD process in, for example, an ASC F-120 ALD reactor. The gate dielectric layer may be a high-k dielectric. Exemplary gate dielectric structures include, for example, a layer of Al_2O_3 , a layer of HfO_2 layer, a nanolaminate layer of HfO_2 and Al_2O_3 , or HfAlO , or any other suitable gate dielectric material. A post-deposition anneal (PDA) may be performed using O_2 , N_2 or any other suitable ambient at an appropriate temperature, for example between about 400 and 700° C.

[0052] A gate (not shown) is formed above the channel region. At least a portion of the gate dielectric is disposed between the gate and the channel region, and the transistor operates as an inversion-type enhancement-mode device, i.e., a device that is off at a gate voltage $V_g=0$, and is on at $V_g>0$.

[0053] As is known to those skilled in the art, there has been a long-time standing Fermi-level pinning issue in fabricating III-V compound semiconductor MOSFET devices. As discussed in the context of FIG. 2, this issue is addressed in embodiments of the instant invention.

[0054] FIGS. 2(a)-(b) illustrate examples of InP MOSFETs. An InP MOSFET **200** may be formed as follows. First, an appropriately doped or semi-insulating semiconductor substrate with an InP-based channel layer is provided, i.e., an InP-based layer **110**, over a substrate **100**. Optionally, an additional epitaxial layer **200** may be deposited above the InP channel layer as described above for FIG. 1, e.g., by CVD, MOCVD or MBE. This additional epitaxial layer **200** may be InP and may include multiple layers of a material other than InP, such as InSb, InAs, GaAs, InAlAs, and/or InGaAs that may be substantially lattice-mismatched to InP. In order to maintain strain in the epitaxial layer **200**, its thickness may be below the critical thickness.

[0055] An appropriate source and drain ion implantation is performed to create source and drain regions **150**, **160** that have a conduction type opposite to that of the channel region, i.e., with n-type source and drain for a p-type channel (for an n-type inversion-type MOSFET), or with p-type source and drain for an n-type channel (for a p-type inversion-type MOSFET). For example, an appropriate p-type source and drain implantation may be a Group II element such as Mg, Be, etc., with a dosage ranging from, e.g., $4 \times 10^{17}/\text{cm}^2$ to $1 \times 10^{19}/\text{cm}^2$, with an implantation depth of, e.g., 1 nm to 1 μm . An appropriate n-type source and drain implantation may be a Group

IV element, e.g., Si, Ge, etc. with a dosage ranging from, e.g., $4 \times 10^{17}/\text{cm}^3$ to $1 \times 10^{19}/\text{cm}^3$ with an implantation depth of, e.g., 1 nm to 1 μm . A target for both n-type and p-type source and drain implantations is to achieve dosage levels as high as are typically attained in Si devices. This may be a challenge in InP-based materials because n-type dopants in a III-V material may exhibit p-type behavior above a certain concentration. For example, n-type dopant Si, when present in a concentration greater than about $1 \times 10^{19}/\text{cm}^3$ in InP, exhibits p-type behavior. A high-quality gate dielectric **210** is formed, typically by first performing a surface-preparation step including a liquid-phase pretreatment or a gas-phase pretreatment employing, e.g., $(\text{NH}_4)_2\text{S}$ or $(\text{NH}_4)\text{OH}$, followed by surface treatment with hydrogen or nitrogen plasma, either in-situ in the same chamber, if feasible, or ex-situ. Preferably an ALD process is used to deposit a high-k dielectric layer. The gate dielectric layer may be an Al_2O_3 layer, an HfO_2 layer, a nanolaminate layer of HfO_2 and HfAlO , a group-II oxide, or any other dielectric material such as a rare-earth oxide or metallic oxide. The gate dielectric layer may have a thickness selected from a range of 1 nm to 1000 nm, preferably 1 nm-10 nm. The gate **220** is defined by conventional gate electrode deposition and lithographic patterning. Subsequently, source and drain ohmic contacts are formed.

[0056] FIG. 2(b) illustrates the structure of a prototype inversion-type InP MOSFET **230**, integrated with a high-k dielectric deposited by ALD. The substrate **100** may be an InP semi-insulating substrate. The source and drain regions **150**, **160** are defined over an Si implanted n+ region **240**. The gate dielectric **210** may be formed from a high-k dielectric, such as Al_2O_3 , HfO_2 , or HfAlO , and/or combinations thereof. The gate **220** is formed from a suitable conducting material, such as nickel/gold.

[0057] The InP MOSFET **230** operates as an inversion-type, enhancement mode device. Because the source and drain regions are of a doping type opposite to that of the channel, e.g., n-type source and drain regions and a p-type channel, at a gate voltage $V_g = 0$, the device is off, such that no current flows between the source and drain.

[0058] FIG. 2(c) summarizes the key steps for the fabrication of Al_2O_3 /InP MOSFETs by use of ALD on an InP semi-insulating substrate, as illustrated in FIG. 2(b). Prior to the formation of the high-k gate dielectric **210**, surface cleaning and preparation of the substrate **100** includes HF- or HCl-based native oxide removal, NH_4OH -based native oxide cleaning and OH-group passivation, and $(\text{NH}_4)_2\text{S}$ based sulfur passivation. These ex-situ wet-cleaning process steps may be extended to an in-situ gap-phase dry-cleaning process that comprises HF or HCl gas-phase cleaning, NH_4OH gas-phase cleaning, and $(\text{NH}_4)_2\text{S}$ gas-phase passivation. Additionally, acetone, methanol, and iso-propanol cleaning may be performed.

[0059] After surface degreasing and $(\text{NH}_4)_2\text{S}$ -based pretreatment, the substrate is transferred in a room ambient to an ALD reactor, such as an ASM F-120 ALD reactor, for gate dielectric **210** formation. The gate dielectric **210** may be, for example, an Al_2O_3 layer having a thickness of, e.g., 30 nm, deposited at a substrate temperature of 300° C., using alternately pulsed chemical precursors of $\text{Al}(\text{CH}_3)_3$ (the Al precursor) and H_2O (the oxygen precursor) in a carrier N_2 gas flow.

[0060] Source and drain regions **150**, **160** are selectively implanted through the 30 nm thick Al_2O_3 layer, e.g., with a Si dose of $1 \times 10^{14} \text{ cm}^{-2}$ at 140 keV. Implantation activation may

be achieved by rapid thermal anneal (RTA), e.g., at 720° C. for 10 seconds. Regrown oxide may be etched away using BHF. A thin layer of Al_2O_3 or HfO_2 or HfAlO (e.g., 8 nm) is deposited, and a post deposition anneal is performed. Those of skill in the art are familiar with suitable alternative materials and process parameters for surface preparation and implantation and activation of source and drain regions.

[0061] The source and drain ohmic contacts may be defined by an electron beam evaporation of a combination of AuGe/Pt/Au and a lift-off process, followed by a RTA process at 500° C. for 30 seconds, also in an N_2 ambient.

[0062] The gate electrode may be defined by electron beam evaporation of conductive materials, such as Ni/Au, Ti/Au, AuGe/Ni/Au, and/or AuGe/Pt/Au and a lift-off process.

[0063] Referring now to FIGS. 2(d)-(j), data for an enhancement-mode n-channel InP MOSFET fabricated on a semi-insulating substrate with (ALD) Al_2O_3 as the gate dielectric are shown. The results illustrated in FIGS. 2(d)-(j) are for MOSFETs with nominal gate lengths varying from 0.75 μm to 40 μm and a gate width of 100 μm . Transfer-length-method (TLM) structures are used to determine contact resistance of 2.5 ohm-millimeter ($\Omega\text{-mm}$) and sheet resistance of 230 $\Omega/\text{sq.}$ at the implanted area. Measurements are made with standard equipment such as an HP4284 LCR meter for the capacitance measurement and a Keithley 4200 for measurement of the MOSFET output characteristics.

[0064] FIG. 2(d) illustrates the drain current vs. drain bias as a function of gate bias for a 1 μm InP MOSFET with 8 nm regrown Al_2O_3 as gate dielectric. In particular, the figure illustrates the dc I_{ds} - V_{ds} characteristic with a gate bias from 0 to 8 V. The measured MOSFET has a designed gate length at mask level (L_{Mask}) of 0.75 μm and a gate width (L_w) of 100 μm . A maximum drain current of 70 mA/mm is obtained at a gate bias of 8 V and a drain bias of 3 V. The gate leakage current is below 10 $\mu\text{A/mm}$ under the same bias condition, more than 4 orders of magnitude smaller than the drain on-current. A maximum transconductance g_m is approximately 10 millisiemens/mm (mS/mm) and an output conductance of approximately 3 mS/mm ($V_g = 8 \text{ V}$). The relatively low g_m may be improved by reducing the thickness of the dielectric, increasing the dielectric constant, and improving the quality of the interface.

[0065] Since the fabrication process used in some embodiments is not self-aligned, accurate determination of the effective gate length and series resistance is especially important for evaluating the intrinsic device performance and the potential for further optimization. FIG. 2(e) illustrates measured channel resistance vs. mask gate length for different gate biases with Al_2O_3 thickness of 30 nm. Specifically, FIG. 2(e) shows the effective gate length (L_{eff}) and series resistance (R_{SD}) extracted by plotting channel resistance R_{Ch} vs. L_{Mask} . R_{SD} and ΔL , which is the difference between L_{Mask} and L_{eff} , are determined to be 38.6 $\Omega\text{-mm}$ and 0.5 μm , respectively, by the equation below:

$$\begin{aligned} \frac{V_{ds}}{I_d} &= R_{Ch} \\ &= \frac{L_{\text{eff}}}{W \mu_{\text{eff}} C_G (V_{GS} - V_T)} \\ &= \frac{L_{\text{Mask}} - \Delta L}{W \mu_{\text{eff}} C_G (V_{GS} - V_T)} \end{aligned} \quad (1)$$

The effective electron mobility μ_{eff} is weakly dependent on gate bias from 2-4 V and is taken as a constant in this calculation. R_{SD} and L_{eff} is determined as the intercept of the linear fitting of R_{ch} at different gate biases and L_{mask} as shown in FIG. 2(e). The R_{SD} value of 386 Ω and the ΔL value of 0.5 μm were determined using line fitting. The obtained R_{SD} is consistent with the results from measurement by a TLM technique since R_{SD} includes contact resistance, sheet resistance, accumulation resistance and spread resistance. ΔL is caused by the inter-diffusion of source and drain implant activation and the proximity effect of the photolithography process.

[0066] FIG. 2(f) illustrates extrinsic and intrinsic drain current and trans-conductance vs. gate bias. In particular, to evaluate the output characteristics more accurately, the intrinsic transfer characteristics is calculated by subtracting the series resistance R_{SD} and using effective gate length L_{eff} instead of mask gate length L_{mask} and compared with the extrinsic one, as shown in FIG. 2(f). The intrinsic drain current and transconductance are only about 10% larger than the extrinsic ones due to the large gate length of 20 μm . FIG. 2(f) also shows that the subthreshold characteristic is scarcely changed. However, the threshold voltage determined by conventional method of linear region extrapolation does show some difference as highlighted as extrinsic threshold voltage V_T and intrinsic threshold voltage V_T^* in FIG. 2(b).

[0067] To better extract the threshold voltage, which is an important parameter in E-mode device characterization, several different methods are used to determine V_T^* on various gate lengths as presented in FIG. 2(g). FIG. 2(g) illustrates threshold voltage vs. the gate length using the intrinsic I-V characteristics of the device using five different methods—the ratio method (RM), the extrapolation in the linear region method (ELR), the second derivative method (SD), the second derivative logarithmic method (SDL), and the match-point method (MP). The figure shows that the linear method may not be appropriate for determine threshold voltage for a non-self-aligned process. The second derivative method and ratio method give mostly the same value at the long gate length device and both show V_T^* roll-off behavior for the submicron gate length device. These two methods may be more reliable ways to determine threshold voltage since the conducting mechanism changes during the transition near threshold, when drain current increases from exponentially to linear or quadratic dependence on the effective gate voltage ($V_g - V_T$).

[0068] FIG. 2(h) illustrates drain current vs. drain bias as a function of gate bias for a 2 μm InP MOSFET with 8 nm Al_2O_3 gate oxide. In particular, the sub-threshold slope (S.S.) and DIBL characteristics of 280 mV/dec and 50 mV for the MOSFET are illustrated.

[0069] FIG. 2(i) illustrates effective mobility vs. normal electric field for the InP MOSFET with 30 nm Al_2O_3 gate oxide and a 100 kHz split-CV measurement. Effective mobility is another important parameter for evaluating MOSFET performance. The “Split-CV” method is used to measure the channel capacitance, which may be used to calculate the total inversion charge in the channel by integrating the C-V curve. The inset of FIG. 2(i) is a 100 kHz C-V curve between gate and channel measured on a 40 μm gate length device from which inversion capacitance is seen clearly. The extracted mobility has a peak value of 650 cm^2/Vs around a normal electric field of 0.22 MV/cm as shown in FIG. 2(i). Better mobility performance may be achievable by using an epi-

taxial InP layer to improve host material quality and optimize the device fabrication process.

[0070] Detailed C-V measurements of MOS capacitors were carried out to evaluate the interface quality of Al_2O_3 formed by ALD on InP. FIG. 2(j) illustrates C-V measurements of an 8 nm Al_2O_3 /n-InP MOSCAP from quasi-static up to 1 MHz.

[0071] Specifically, the samples include 8 nm thick Al_2O_3 deposited on an n-type InP substrate at 300° C. by ALD. A 500° C. post deposition annealing improves C-V characteristics only moderately for InP as shown in FIG. 2(j), in contrast to the GaAs case. The frequency dispersion at accumulation capacitance may be attributed to the relative high interface trap density (D_{it}) at the conduction band edge, though the extrinsic parasitic effects could also contribute to the frequency dispersion partly. The mid-gap D_{it} is estimated to be approximately $2-3 \times 10^{12}/cm^2 \cdot eV$ determined by the high-frequency (HF)-low-frequency (LF) method. This value is consistent with the value determined from the m-factor, a parameter related to sub-threshold characteristics. More specifically, the subthreshold slope is relatively large due to the large gate oxide thickness or the small oxide capacitance C_{ox} and the existing interface trap capacitance C_{it} . M-factor is defined as $60 \text{ mV/dec} \cdot (1 + C_{it}/C_{ox})$. From the measured sub-threshold slope, an interface trap density D_{it} of $\sim 2-3 \times 10^{12}/cm^2 \cdot eV$ is determined.

[0072] Moderate hysteresis of 100-300 mV exhibits in the C-V loops (not shown). The C-V characteristics in FIG. 2(j) show a clear transition from accumulation to depletion for HF C-V and the inversion features for LF C-V and quasi-static C-V indicating that the conventional Fermi-level pinning phenomenon reported in the literature is overcome in this ALD Al_2O_3 /InP sample. The unpinning of the Fermi level may be attributed to the self-cleaning ALD Al_2O_3 process that removes the native oxide on the InP surface, similarly to the situation in ALD Al_2O_3 formed on GaAs. The unpinning of the Fermi level by the ALD Al_2O_3 process described above is significant, as it contributes to the realization of enhancement-mode MOSFETs on InP, as demonstrated in FIG. 2(d).

[0073] The ALD process on III-V compound semiconductors enables the formation of high-quality gate dielectrics and unpinning of the Fermi level on compound semiconductors. A 0.75- μm gate-length E-mode n-channel MOSFET with an Al_2O_3 gate oxide thickness of 30 nm may have a gate leakage current less than 10 $\mu A/mm$ at a gate bias of 8 V, a maximum drain current of 70 mA/mm, and a transconductance of 10 mS/mm. The peak effective mobility is $\sim 650 \text{ cm}^2/Vs$ and the interface trap density of Al_2O_3 /InP is estimated to be $\sim 2-3 \times 10^{12}/cm^2 \cdot eV$.

[0074] The prototype measurements reflected in FIGS. 2(d)-(j) reflect the use of Al_2O_3 as the gate dielectric. Alternatively other materials, such as Hf-based high-k materials, can be used for the gate dielectric. An exemplary process for formation of HfO_2 as a dielectric by using ALD is to use ALD precursors such as $HfCl_4$, $TEMAHf$ or $TDMAHf$ and oxygen precursors such as H_2O or O_3 . A typical HfO_2 ALD process is performed between 200-350° C. Surface cleaning and preparation is similar with use of materials such as HF, HCl, NH_4OH and $(NH_4)_2S$.

[0075] For InP devices, such as the examples of FIGS. 2(a)-(j), the substrate may be a semi-insulating InP substrate or alternatively may be another material that supports an InP channel device. For example, a Si or SOI substrate, can pro-

vide cost and manufacturing advantages because of the possibility of using large-scale wafers and the well-developed Si-based processing facilities.

[0076] InP-based devices may be integrated on Si substrates by the use of aspect ratio trapping (ART) techniques. Two exemplary approaches for such integration using ART techniques are illustrated in FIGS. 3(a)-(d). A detailed description of ART techniques may be found in U.S. patent application Ser. No. 11/728,032, incorporated herein in its entirety.

[0077] FIGS. 3(a)-3(b) show how ART techniques may be used to grow a high-quality InP layer above a buffer layer on a lattice-mismatched underlying material, such as a Si wafer. The crystalline substrate may have a lattice constant substantially different from a lattice constant of InP. As illustrated in FIG. 3(a), a non-crystalline material, e.g., a dielectric layer 300, is formed over the substrate 100. The dielectric layer 300 may include a dielectric material, such as silicon nitride or silicon dioxide. The dielectric layer 300 may be formed by a method known to one of skill in the art, e.g., thermal oxidation or plasma-enhanced chemical vapor deposition. As illustrated, the dielectric layer 300 has a thickness t_1 corresponding to a desired height of crystalline material to be deposited in a window 310 formed through the dielectric layer 300. In some embodiments, the thickness t_1 of the dielectric layer 300 is selected from a range of, e.g., 20-50000 nm.

[0078] A mask (not shown), such as a photoresist mask, is formed over the substrate 100 and the dielectric layer 300. The mask is patterned to expose at least a portion of the dielectric layer 300. The exposed portion of the dielectric layer 300 is removed by, e.g., reactive ion etching (RIE) to define the window 310 in the non-crystalline mask, i.e., in the dielectric layer 300. The window 310 extends to a surface of the substrate 100 and may be defined by at least one sidewall 320. The sidewall 320 is formed from the dielectric layer 300 and is, therefore, non-crystalline. The sidewall 320 may have a height h at least equal to a predetermined distance H from the surface of the substrate 100, i.e., the sidewall extends above the substrate by the height h . It has been observed experimentally that dislocations in a mismatched cubic semiconductor grown on a Si (100) surface in the near-neighborhood (e.g., within approximately 500 nm or less) of a vertical dielectric sidewall 420 surface bend toward that surface at approximately 30 degrees through 60 degrees. For example, the dislocations may bend toward that surface at approximately a 45 degree angle to that surface. Based on this relationship, one may typically expect the predetermined distance H necessary to trap defects to be approximately equal to a width between $\frac{1}{2}w$ and $2w$, where w is the width of the window.

[0079] The window 310 may be substantially rectangular in terms of cross-sectional profile, a top view, or both, and have a width w that is smaller than a length l (not shown) of the window. For example, the width w of the window may be less than about 5000 nm, e.g., about 20-1000 nm. In some embodiments, the width of the window is about 150 nm. A length l of the window may exceed each of w and H . The ratio of the height h of the window to the width w of the window may be ≥ 1 , and preferably is between about 1 and about 50.

[0080] A crystalline buffer layer 330 including a material, such as Ge or InP, that has a lattice mismatch with the substrate 100 material, e.g., Si, is epitaxially grown within the opening 310. By configuring the aspect ratio of the height of the mask relative to the width of the opening, defects arising

from deposition of the buffer layer may exit at the sidewalls below the top surface of the mask layer. This provides a high-quality top surface of the buffer layer 330 upon which the InP-based top layer 110 may be grown epitaxially.

[0081] In particular, the buffer layer 330 may include a second crystalline semiconductor material that may include or consist essentially of a group IV element or compound, a III-V compound, and/or a II-VI compound. Examples of suitable group IV elements or compounds include germanium, silicon germanium, and silicon carbide. Examples of suitable III-V compounds include gallium arsenide, gallium nitride, indium arsenide, indium antimonide, indium aluminum antimonide, indium aluminum arsenide, indium phosphide, and indium gallium arsenide. Examples of suitable II-VI compounds include zinc selenide and zinc oxide. The buffer layer 330 is lattice-matched to the InP-based top layer 110 formed thereover, i.e., the buffer layer 330 may have a second lattice constant substantially similar to the lattice constant of InP.

[0082] The second crystalline semiconductor material may be formed by selective epitaxial growth in any suitable epitaxial deposition system, including, but not limited to, MOCVD, atmospheric-pressure CVD (APCVD), low- (or reduced-) pressure CVD (LPCVD), ultra-high-vacuum CVD (UHCVD), MBE, or ALD. In the CVD process, selective epitaxial growth typically includes introducing a source gas into the chamber. The source gas may include at least one precursor gas and a carrier gas, such as, for example, hydrogen. The reactor chamber may be heated by, for example, RF-heating. The growth temperature in the chamber may range from about 300° C. to about 900° C., depending on the composition of the epitaxial region. The growth system may also utilize low-energy plasma to enhance the layer growth kinetics. CVD has a number of advantages, including the capability for depositing films with low defect densities and rapidly varying alloy compositions, as well as high quality regrowth capability. CVD may also provide improved manufacturability due to relatively higher throughput, relatively short downtimes, and scalability to very large reactors.

[0083] The epitaxial growth system may be a single-wafer reactor or a multiple-wafer batch reactor. Suitable CVD systems commonly used for volume epitaxy in manufacturing applications include, for example, an Aixtron 2600 multi-wafer system available from Aixtron, based in Aachen, Germany; an EPI CENTURA single-wafer multi-chamber systems available from Applied Materials of Santa Clara, Calif.; or EPSILON single-wafer epitaxial reactors available from ASM International based in Bilthoven, The Netherlands.

[0084] Dislocation defects in the second crystalline semiconductor material reach and terminate at the sidewalls 320 of the window in the dielectric material 300 at or below a vertical predetermined distance H from the surface of the substrate, such that dislocations in the second crystalline semiconductor material decrease in density with increasing distance from the bottom portion of the window. Accordingly, the upper portion of the buffer layer 330 is substantially exhausted of dislocation defects. Various dislocation defects such as threading dislocations, stacking faults, twin boundaries, or anti-phase boundaries may thus be substantially eliminated from the upper portion of the epitaxial region. A density of such dislocation defects may be less than, for example, $10^6/\text{cm}^2$, preferably less than $10^3/\text{cm}^2$. The second crystalline semiconductor material may be either substantially relaxed or strained.

[0085] The InP-based top layer **110**, i.e., the channel layer, is formed over the buffer layer **330**, the channel layer being substantially lattice-matched with the buffer layer. After using ART techniques to provide a high-quality InP-based top layer **110**, the techniques as described above in connection with FIGS. **1** and **2** may be used to create a device **340**, such as a transistor, which incorporates the InP-based top layer, preferably as a channel. The source and drain regions of the transistor may also be formed in the channel layer, and a gate formed above the channel layer.

[0086] Although using a Si substrate provides cost and manufacturability advantages, ART techniques may be used with a variety of substrate and mask materials. As discussed in U.S. Ser. No. 11/728,032, the opening may be configured in a variety of ways based on materials and applications, such as in a trench configuration.

[0087] Referring now to FIGS. **3(c)-(d)**, an alternative ART approach for providing an InP-based channel layer is described. The mask **300** defines a plurality of openings **310** above substrate **100**. An InP-based material, such as InP, is epitaxially grown within the openings, which are configured with an aspect ratio so that the majority of defects arising from the lattice mismatch between the underlying substrate, e.g., Si and InP, exit the InP-based layer at the mask sidewalls within the openings. The InP-based material is epitaxially grown to extend above the mask **300** to define a high quality coalesced InP-based top layer **110**, upon which InP-based devices **340**, such as the MOSFETs described above with reference to FIGS. **1** and **2**, may be fabricated.

[0088] Creation and activation of the source and drain may be a challenging step in forming transistors such as an inversion-type InP MOSFET. An alternative to the implanted source/drain formation approach discussed above uses a replacement source/drain structure. Referring to FIG. **4(a)**, a semiconductor substrate **100** with an InP-based top channel layer **110** is provided, with predefined channel doping type and doping level. The channel may be, for example, p-type doped with a doping level of $1 \times 10^{18}/\text{cm}^3$ to $1 \times 10^{19}/\text{cm}^3$. For a III-V material such as InP, a suitable n-type dopant is a Group IV element, such as Si. A suitable p-type is a Group II element, such as Mg. A relatively high doping level is preferred for enabling the low contact resistances. It is a challenge, however, to dope InP and other III-V materials to a level greater than $1 \times 10^{20}/\text{cm}^3$.

[0089] A gate dielectric **210** is deposited on the InP channel material according to the methods described above, for example using ALD to deposit a dielectric material such as Al_2O_3 . The dielectric material may include hafnium, e.g., HfO_2 . Thereafter, a conductive layer, e.g., a gate electrode layer is formed over the gate dielectric, such that the dielectric layer is disposed between a semiconductor layer, i.e., the InP-based top channel layer **110**, and the conductive layer. A gate **220** is defined in the conductive layer by patterning methods known to one of skill in the art.

[0090] Using techniques known to those familiar with the art, a source region and a drain region are patterned in a lithographic mask next to the gate structure, and the portions of the InP-based top layer **110** in the source and drain regions are removed by, e.g., dry etching, to form source and drain recesses **400**, **400'**, as shown in FIG. **4(b)**. The source and drain recesses **400**, **400'** are filled with an appropriate source/drain material **410** that has a doping type opposite to that of the channel region, as shown in FIG. **4(c)**. In an embodiment, InP may be grown epitaxially within the source and drain

recesses **400**, **400'** by CVD with doping performed in situ. With a p-type channel dopant, an n-type dopant may be used for the source and drain to create an n-MOSFET. The doping types are reversed for a p-MOSFET. Those of skill in the art understand how to use appropriate dopants and materials to achieve the desired device characteristics.

[0091] This approach, including the regrowth of the source and drain in the recesses, may allow the achievement of higher doping concentrations in the source and drain regions, and may enable lower contact resistances. The MOSFET structure illustrated in FIG. **4c** may be an inversion-type, enhancement-mode device. As discussed previously, at $V_g=0$, a pn-junction blockades the drain current in the channel so that the device is off. At $V_g>0$, the InP-based channel under the gate is inverted to become n-type, so the device is on with a large drain current.

[0092] FIGS. **5(a)-(g)** illustrate a method of creating a MOSFET with source and drain regions that are self-aligned to the gate, i.e., the edges of the source and drain regions next to the gate are defined by the same mask that defines the edges of the gate next to the source and drain regions. Referring to FIG. **5(a)**, a mask **500** defines the locations of the gate and channel locations over a substrate **100**. The mask **500** functions as a dummy gate and also as a barrier to ion implantation in the channel region during creation of the source and drain regions **510**, **520** by ion implantation, as shown in FIG. **5(b)**. The mask may be made from an appropriate material, such as photoresist. After ion implantation of the source and drain regions, an insulator **530** such as SiN is deposited over the mask **500** and source and drain regions **510**, **520**, and is then etched back to expose a top surface of the mask **500** (i.e., of the dummy gate) as shown in FIGS. **5(c)-5(d)**. Referring to FIG. **5(e)**, the dummy gate is then removed by a selective etch, e.g., by a wet etch such as KOH or TMAH, or a dry etch in a reactive ion etching system, to define an opening **540**. A gate dielectric **550** and gate material layers **560** are deposited into the opening created by the removal of the dummy gate, and etched back as shown in FIGS. **5(f)-(g)**. Advantageously, this self-aligned gate procedure enables the use of InP as a channel material and ALD for depositing a high-k gate dielectric while maintaining small (sub-micron) feature sizes and spacing. Forming a dummy gate enables the formation of a self-aligned gate, without exposure of the device gate dielectric and gate electrode to a high temperature dopant activation process that may damage a high-k dielectric. The dummy gate approach includes forming a gate dielectric after a source/drain implantation and activation, rather than before these steps, as in a conventional process flow.

[0093] InP is a binary compound semiconductor resulting from a relatively weak covalent bond between indium and phosphorous. While InP MOSFETs feature characteristics such as enhanced drain currents and improved performance with respect to Fermi-level pinning and higher electron saturation velocity, the relatively strong electropositivity of indium can be a disadvantage, resulting, for example, in the relatively high reactivity of InP with oxygen. Thus, for example, as shown in FIGS. **6(a)-6(b)**, to mitigate interfacial instability difficulties between InP and dielectric materials as well as to prevent incongruent sublimation of the III-V material InP, it is possible to use a diffusion/barrier layer **600** including a relatively inert materials such as transition metal nitrides or group III-nitrides (e.g., BN, AlN, MoN, TaN, TiN, or AlN, etc., which are much less reactive with InP than oxygen, especially at higher temperatures) adjacent the top

surface of the InP-based top layer **110** of substrate **100**. As shown in FIG. 6(b), the use of a relatively inert diffusion/barrier layer **600** permits the sequential deposition of a relatively non-inert dielectric **610** such as SiO₂ or Al₂O₃ above the relatively inert layer. By use of ALD, the inert barrier layer **600** may be kept relatively thin, e.g., as thin as one monolayer (which typically will be about 15 angstroms (Å)), or preferably about 5 to 10 nanometers (nm), although the barrier layer can be substantially thicker, e.g., as thick as 1 μm or more. In alternative embodiments, the barrier layer may be AlN or AlON or a nanolaminate—e.g., alternating layers of AlN and Al₂O₃, deposited as monolayers or in layers of about 5 nm—which can enhance the ability of the barrier layer to trap materials such as In or P before they can diffuse through the barrier layer.

[0094] FIGS. 7(a)-(d) illustrate a method of forming source and drain regions that also provides for an improved dielectric layer, e.g., an improved gate dielectric layer. In FIG. 7(a) a dielectric **700** inert to InP, such as a transition metal-nitride, is provided above an InP-based top layer **110** using ALD as described above for FIG. 6. In FIG. 7(b) the gate **710** is defined and the source and drain regions **720**, **730** of a transistor are implanted using techniques similar to those discussed above for FIGS. 1 and 2, and the source and drain regions are amorphized. In an embodiment, amorphization is accomplished by using a heavy dopant species such as SiF_x, with sufficient dopant dosage and energy to concomitantly accomplish both amorphization and high dopant concentration of the source/drain regions. In another embodiment, amorphization is accomplished by implanting an inert element such as argon or another suitable noble gas prior to the implantation of the dopant species. In still another embodiment, amorphization is accomplished by using a heavy dopant species such as SiF_x, with sufficient dopant dosage and energy to concomitantly accomplish amorphization of and high dopant concentration in the source/drain regions. For example, complete amorphization of the InP lattice may be accomplished through the use of high dosage implants using compounds such as SiF_x between 10¹⁴cm⁻² and 10¹⁶cm⁻² through dielectric layer(s). Easy displacement of the In sublattice along <0001> directions can enable amorphization through heavy dosage implantation.

[0095] In FIG. 7(c) the source/drain regions **720**, **730** are annealed at a temperature sufficiently high to ensure recrystallization, such as by RTA between 400° C. and 1000° C. Use of high implantation dosages and improved activation/ionization of the dopant species through recrystallization of the amorphized InP lattice lowers the contact resistance. Then in FIG. 7(d) an oxidizing species, e.g., PECVD SiO₂, is introduced at a temperature of, e.g., 300° C., to enable formation of an oxynitride from the dielectric **700**, e.g., from a dielectric transition metal nitride. Converting the dielectric transition metal nitride into an oxynitride provides an improved dielectric from the same layer that provided an effective diffusion barrier, eliminating the need to deposit new dielectric material. Effective performance of the transistor embodiment of FIG. 7 is enhanced by the use of ohmic contacts.

[0096] In some embodiments, processes and materials analogous to the methods described above may be used to form a high electron mobility transistor (HEMT) including an InP-based material. A HEMT is a field effect transistor incorporating a junction between two materials with different band gaps (i.e., a heterojunction) as the channel instead of a doped

region. An InP-based material may be incorporated in a HEMT as a portion of the channel layer.

[0097] The embodiments disclosed above and their variations address a variety of challenges in providing enhanced MOSFET performance in a commercially viable way through various combinations of materials and techniques such as InP-based, ALD, and Al₂O₃ or Hf-based dielectrics in conjunction with various other features and steps. Those skilled in the art will understand how to substitute other materials and process steps to apply these inventive combinations to a variety of applications.

What is claimed is:

1. A method of fabricating a transistor, the method comprising:
 - providing an InP-based material layer structure including a channel layer;
 - defining a source region and a drain region in the InP-based material layer structure;
 - providing a channel region between the source and drain regions, the channel region including at least a portion of the channel layer;
 - depositing a gate dielectric over the channel region by atomic layer deposition (ALD); and
 - providing a gate above the channel region, wherein at least a portion of the gate dielectric is disposed between the gate and the channel region and the transistor operates as an inversion-type, enhancement-mode device.
2. The method of claim 1 wherein the source and drain regions are at least partially disposed in the channel layer.
3. The method of claim 1 wherein the source and drain regions are disposed above the channel layer.
4. The method of claim 1 wherein the gate dielectric comprises at least one of a group II material or a transition metal.
5. The method of claim 4 wherein the gate dielectric comprises aluminum.
6. The method of claim 4 wherein the gate dielectric comprises hafnium.
7. The method of claim 1 wherein the channel layer comprises a strained region.
8. The method of claim 1 wherein the channel layer comprises at least one of InSb, InGaAs, InAs, or InP.
9. The method of claim 1 wherein the channel layer comprises a plurality of substantially lattice-matched layers.
10. The method of claim 1 wherein the transistor is a MOSFET.
11. The method of claim 1 wherein the transistor is a HEMT.
12. The method of claim 1 further comprising:
 - providing a silicon substrate,
 - wherein the InP-based material layer is provided over the silicon substrate.
13. A method of fabricating a semiconductor structure, the method comprising:
 - providing a semiconductor layer comprising indium and phosphorous;
 - depositing by ALD, above at least a portion of the semiconductor layer, a dielectric layer comprising hafnium; and
 - providing a conductive layer over at least a portion of the dielectric layer,
 - wherein the dielectric layer is disposed between the semiconductor layer and the conductive layer.

14. The method of claim **13** wherein the semiconductor layer comprises a transistor channel region and the conductive layer comprises a transistor gate region.

15. A method of fabricating a transistor, the method comprising:

providing a crystalline substrate having a first lattice constant substantially different from a lattice constant of InP;

providing a non-crystalline mask above the substrate, the mask including an opening having sidewalls that extend above the substrate by a height;

providing within the opening a crystalline buffer layer having a second lattice constant substantially similar to the lattice constant of InP, the buffer layer having a height less than the mask opening sidewall height, the buffer layer height being sufficient to permit defects arising from the lattice mismatch to exit the buffer layer at the mask opening sidewalls;

providing a channel layer above the buffer layer, the channel layer being substantially lattice-matched with the buffer layer;

defining a source region, a drain region, and a channel region of a transistor in the channel layer; and

providing a gate above the channel layer.

16. The method of claim **15** wherein the substrate is a silicon substrate.

17. The method of claim **15** wherein the mask comprises SiO₂.

18. The method of claim **15** wherein the buffer layer comprises a III-V material.

19. The method of claim **15** wherein the buffer layer comprises InP.

20. The method of claim **15** wherein the channel layer comprises InP.

* * * * *