

(12) **United States Patent**
Hunstable

(10) **Patent No.: US 10,447,103 B2**
(45) **Date of Patent: Oct. 15, 2019**

(54) **MULTI-TUNNEL ELECTRIC
MOTOR/GENERATOR**

H02K 3/12 (2013.01); *H02K 3/28* (2013.01);
H02K 15/08 (2013.01); *H02K 21/125*
(2013.01); *H02K 21/14* (2013.01); *H02K*
21/22 (2013.01); *H02K 21/24* (2013.01)

(71) Applicant: **Linear Labs, Inc.**, Granbury, TX (US)

(72) Inventor: **Fred E. Hunstable**, Granbury, TX (US)

(73) Assignee: **LINEAR LABS, LLC**, Fort Worth, TX
(US)

(58) **Field of Classification Search**

CPC *H02K 1/18*; *H02K 1/45*; *H02K 21/12*;
H02K 21/14; *H02K 21/26*; *H02K 53/00*
USPC 310/179
See application file for complete search history.

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(56) **References Cited**

U.S. PATENT DOCUMENTS

(21) Appl. No.: **15/848,540**

2,703,370 A 3/1955 Steensen
3,300,663 A 1/1967 Rosaen

(22) Filed: **Dec. 20, 2017**

(Continued)

(65) **Prior Publication Data**

FOREIGN PATENT DOCUMENTS

US 2018/0212486 A1 Jul. 26, 2018

CN 2226352 Y 5/1996
CN 2452204 Y 10/2001

Related U.S. Application Data

(Continued)

(63) Continuation of application No. PCT/US2016/
039673, filed on Jun. 27, 2016, which is a
continuation-in-part of application No. 15/008,431,
filed on Jan. 27, 2016.

(Continued)

OTHER PUBLICATIONS

Final Office Action, dated Mar. 9, 2018, by the USPTO, re U.S.
Appl. No. 15/413,228.

(Continued)

(51) **Int. Cl.**

H02K 1/27 (2006.01)
H02K 1/02 (2006.01)
H02K 21/14 (2006.01)
H02K 3/28 (2006.01)
H02K 15/08 (2006.01)
H02K 3/12 (2006.01)
H02K 21/12 (2006.01)
H02K 1/14 (2006.01)
H02K 1/30 (2006.01)

(Continued)

Primary Examiner — Mang Tin Bik Lian


Assistant Examiner — Rashad H Johnson

(74) *Attorney, Agent, or Firm* — Bill R. Naifeh

(57) **ABSTRACT**

Disclosed are various embodiments for a motor/generator
where the stator is a coil assembly and the rotor is a magnetic
toroidal cylindrical tunnel or where the rotor is a coil
assembly and the stator is a magnetic toroidal cylindrical
tunnel, and where the magnetic toroidal cylindrical tunnel
comprises magnets having a NNSS or SSNN pole configu-
ration.

18 Claims, 25 Drawing Sheets

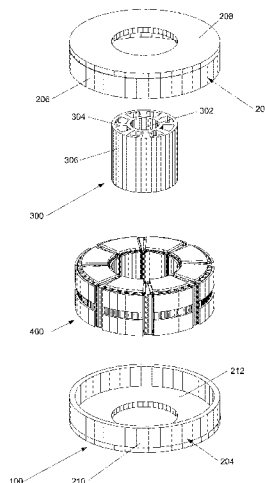

US 10,447,103 B2

Page 2

Related U.S. Application Data

(60) Provisional application No. 62/185,637, filed on Jun. 28, 2015.

(51) Int. Cl.

H02K 21/24 (2006.01)
H02K 21/22 (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

3,469,133 A 9/1969 Sticherbatcheff
3,895,245 A 7/1975 Bode
3,979,619 A 9/1976 Whiteley
4,237,396 A 12/1980 Blenkinsop
4,388,547 A 6/1983 Gruber
4,441,043 A 4/1984 DeCesare
4,488,075 A 12/1984 DeCesare
4,538,086 A 8/1985 Marsh et al.
4,547,713 A 10/1985 Langley et al.
4,629,921 A 12/1986 Gavaletz
4,814,651 A 3/1989 Elris
5,004,944 A 4/1991 Fisher
5,099,158 A 3/1992 Stuart et al.
5,594,289 A 1/1997 Minato
5,691,589 A 11/1997 Keim et al.
5,886,450 A 2/1999 Kuehnle
5,962,947 A 10/1999 Suzuki et al.
5,977,684 A 11/1999 Lin
6,054,834 A 4/2000 Ha
6,093,986 A 7/2000 Windhorn
6,104,108 A 8/2000 Hazelton
6,211,597 B1 4/2001 Nakano
6,388,352 B1 5/2002 Huang
6,531,799 B1 3/2003 Miller
6,664,689 B2 12/2003 Rose
6,664,704 B2 12/2003 Calley
6,774,591 B2 8/2004 Arimitsu et al.
6,803,691 B2 10/2004 Rose
6,806,607 B2 10/2004 Lau
6,891,299 B2 5/2005 Coupert
6,924,574 B2 8/2005 Qu et al.
6,924,579 B2 8/2005 Calley
6,930,421 B2 8/2005 Rose
6,930,422 B2 8/2005 Rose
6,967,424 B2 11/2005 Popov
6,979,925 B2 12/2005 Schwamm
7,049,722 B2 5/2006 Rose
7,233,088 B2 6/2007 Wise
7,279,818 B1 10/2007 Wise
7,315,103 B2 1/2008 Qu
7,348,703 B2 3/2008 Bojiuc
7,378,749 B2* 5/2008 Moore F02C 6/18
290/2
7,554,241 B2 6/2009 Rao
7,732,973 B2 6/2010 Bojiuc
7,755,244 B2 7/2010 Ley et al.
7,765,905 B2 8/2010 Trumper
7,791,242 B2 9/2010 Bojiuc
7,834,503 B2 11/2010 Bojiuc
7,898,134 B1 3/2011 Shaw
8,008,821 B2 8/2011 Calley
8,063,528 B2 11/2011 Toot
8,074,922 B2 12/2011 Bojiuc
8,159,104 B1 4/2012 Bojiuc
8,232,695 B2 7/2012 Bojiuc
8,288,916 B2 10/2012 Quere
8,362,731 B2 1/2013 Smith
8,400,037 B2 3/2013 Wojtowicz
8,415,848 B2 4/2013 Calley
8,598,754 B2 12/2013 Lacour
8,912,699 B2 12/2014 Kuntz
9,219,962 B2 12/2015 Hunstable
9,419,483 B2 8/2016 Hunstable
RE46,449 E 6/2017 Bojiuc
9,729,016 B1 8/2017 Hunstable

9,825,496 B2 11/2017 Hunstable
10,256,680 B2 4/2019 Hunstable
10,263,480 B2 4/2019 Hunstable
10,284,029 B2 5/2019 Hunstable
2003/0025417 A1 2/2003 Rose
2004/0027022 A1 2/2004 Weir
2004/0061397 A1 4/2004 Rose
2004/0194286 A1 10/2004 Rose
2004/0195932 A1 10/2004 Rose
2004/0195933 A1 10/2004 Rose
2004/0232800 A1 11/2004 Seguchi et al.
2005/0194855 A1 9/2005 Hasebe
2006/0038454 A1 2/2006 Bojiuc
2006/0273686 A1 12/2006 Edelson et al.
2007/0228860 A1 10/2007 Rao
2008/0278019 A1* 11/2008 Lu H02K 1/14
310/156.32
2009/0102305 A1 4/2009 Lu
2009/0224627 A1 9/2009 Hino et al.
2009/0224628 A1 9/2009 Hiwaki et al.
2009/0261675 A1 10/2009 Hsiao et al.
2010/0164422 A1 7/2010 Shu et al.
2010/0289365 A1 11/2010 Bando et al.
2011/0187222 A1 8/2011 Li et al.
2012/0153763 A1 6/2012 Kenji
2012/0286616 A1 11/2012 Li et al.
2013/0249343 A1 9/2013 Hunstable
2014/0070651 A1 3/2014 Gerfast
2014/0191612 A1 7/2014 Mariotto
2015/0001976 A1 1/2015 Hunstable
2015/0137647 A1 5/2015 Hunstable
2015/0171694 A1* 6/2015 Walsh H02K 3/47
310/156.43
2016/0020652 A1 1/2016 Hunstable
2016/0094096 A1 3/2016 Hunstable
2016/0380496 A1 12/2016 Hunstable
2017/0237325 A1 8/2017 Hunstable
2018/0131244 A1 5/2018 Hunstable
2018/0278134 A1 9/2018 Hunstable
2018/0331593 A1 11/2018 Hunstable

FOREIGN PATENT DOCUMENTS

CN 101005229 A 7/2007
CN 102687378 A 9/2012
CN 103683768 A 3/2014
CN 104272259 A 1/2015
CN 104285366 A 1/2015
DE 102010024344 A1 12/2011
EP 1191673 A2 3/2002
EP 1990894 A2 11/2008
JP S51133709 11/1976
JP S5492305 12/1977
JP S61173658 A 8/1986
JP S61144782 9/1986
JP 2002369473 A 12/2002
JP 2006217771 A 8/2006
JP 2008141853 A 6/2008
JP 2010166741 A 7/2010
JP 102761179 A 10/2012
KR 101276633 B1 6/2013
WO 2008096913 A1 8/2008
WO 2011032675 A2 3/2011
WO 2016164818 A1 10/2016
WO 2017003955 A1 1/2017
WO 2017070403 A1 4/2017
WO 2018045360 A1 3/2018

OTHER PUBLICATIONS

International Search Report and Written Opinion, dated Mar. 15, 2018, by the ISA/RU, re PCT International Application No. PCT/US2017/049981.
Notice of Allowance, dated Mar. 29, 2018, by the USPTO, re U.S. Appl. No. 14/866,787.
Notice of Allowance, dated Apr. 13, 2018, by the USPTO, re U.S. Appl. No. 14/866,788.

(56)

References Cited**OTHER PUBLICATIONS**

Aydin, Metin, et al., "Design and 3D Electromagnetic Field Analysis of Non-slotted and Slotted TORUS Type Axial Flux Surface Mounted Permanent Magnet Disc Machines," IEEE International Electric Machines and Drives Conference, Jun. 17-20, 2001, pp. 645-651.

Aydin, Metin, et al., "Performance Evaluation of an Axial Flux Consequent Pole PM Motor using Finite Element Analysis," IEEE International Electric Machines and Drives Conference, vol. 3, Jun. 1-4, 2003, pp. 1682-1687.

Huang, Surong, et al., "TORUS Concept Machines: Pre-Prototyping Design Assessment for Two Major Topologies," IEEE Industry Applications Conference, vol. 3, Sep. 30-Oct. 4, 2001, pp. 1619-1625.

Australian Exam Report, dated May 10, 2016, re Patent App No. 2013235132; 3 pages.

Office Action, dated Aug. 25, 2015, by the USPTO, re U.S. Appl. No. 13/848,048.

Final Office Action, dated Feb. 17, 2016, by the USPTO, re U.S. Appl. No. 13/848,048.

Notice of Allowance, dated Jun. 7, 2016, by the USPTO, re U.S. Appl. No. 13/848,048.

Pre-Interview First Office Action, dated Apr. 15, 2015, by the USPTO, re U.S. Appl. No. 14/608,232.

First Action Interview—Office Action, dated Nov. 13, 2015, by the USPTO, re U.S. Appl. No. 14/608,232.

Final Office Action, dated Feb. 25, 2016, by the USPTO, re U.S. Appl. No. 14/608,232.

Notice of Allowance, dated Jun. 27, 2016, by the USPTO, re U.S. Appl. No. 14/608,232.

Notice of Allowance, dated Nov. 2, 2016, by the USPTO, re U.S. Appl. No. 14/608,232.

Office Action, dated Jan. 6, 2017, by the USPTO, re U.S. Appl. No. 14/490,656.

Chinese Office Action, dated Jul. 20, 2016, re Patent App No. 201380022180.7; 9 pages.

Japanese Office Action, dated Jan. 25, 2017, re JP Patent App No. 2015-501894.

International Search Report and Written Opinion of the ISA, dated Aug. 8, 2014, re PCT/US2013/033198.

International Search Report and Written Opinion of the ISA, dated Aug. 18, 2016, re PCT/US2016/026776.

International Search Report and Written Opinion, dated Nov. 3, 2016, by the ISA/RU, re PCT/US2016/039673.

International Search Report and Written Opinion, dated Jan. 9, 2017, by the ISA/US, re PCT/US2016/057999.

Chinese Office Action, dated Apr. 19, 2017, re CN App No. 201380022180.7.

Notice of Allowance, dated Jun. 27, 2017, by the USPTO, re U.S. Appl. No. 15/492,529.

Ex parte Quayle Action, mailed Jul. 6, 2017, by the USPTO, re U.S. Appl. No. 14/490,656.

Office Action, dated Jul. 21, 2017, by the USPTO, re U.S. Appl. No. 15/413,228.

Office Action, dated Oct. 2, 2017, by the USPTO, re U.S. Appl. No. 14/866,788.

Notice of Allowance, dated Oct. 16, 2017, by the USPTO, re U.S. Appl. No. 14/490,656.

Office Action, dated Nov. 6, 2017, by the USPTO, re U.S. Appl. No. 14/866,787.

Office Action, dated Jun. 27, 2018, by the USPTO, re U.S. Appl. No. 15/008,431.

Office Action, dated Sep. 19, 2018, by the USPTO, re U.S. Appl. No. 15/413,228.

EP Exam Report, dated Apr. 18, 2018, by the EPO, re EP Patent App No. 13714168.5.

EP Search Report, dated Oct. 26, 2018, by the EPO, re EP Patent App No. 16777421.5.

EP Official Action, dated Nov. 13, 2018, by the EPO, re EP Patent App No. 16777421.5.

EP Exam Report, dated Oct. 10, 2018, by the EPO, re EP Patent App No. 13714168.5.

Indian Exam Report, dated Nov. 19, 2018, by IP India, re IN Patent App No. 8335/DELNP/2014.

CA Office Action, dated Jan. 24, 2019, by the CIPO, re CA Patent App No. 2,881,979.

EP Extended Search Report, dated Feb. 22, 2019, by the EPO, re EP Patent App No. 16818559.3.

Notice of Allowance, dated Mar. 6, 2019, by the USPTO, re U.S. Appl. No. 15/008,431.

EP Official Action, dated Mar. 12, 2019, by the EPO, re EP Patent App No. 16818559.3.

Notice of Allowance, dated Apr. 10, 2019, by the USPTO, re U.S. Appl. No. 15/413,228.

EP Extended Search Report, dated Apr. 18, 2019, by the EPO, re EP Patent App No. 16858253.4.

CN Office Action, dated Apr. 10, 2019, by the CIPO, re CN Patent App No. 201680033171.1.

EP Official Action, dated May 22, 2019, by the EPO, re EP Patent App No. 16858253.4.

Notice of Allowance, dated May 31, 2019, by the USPTO, re U.S. Appl. No. 16/374,132.

CN Office Action, dated Jun. 5, 2019, by the CIPO, re CN Patent App No. 201680050018.X.

* cited by examiner

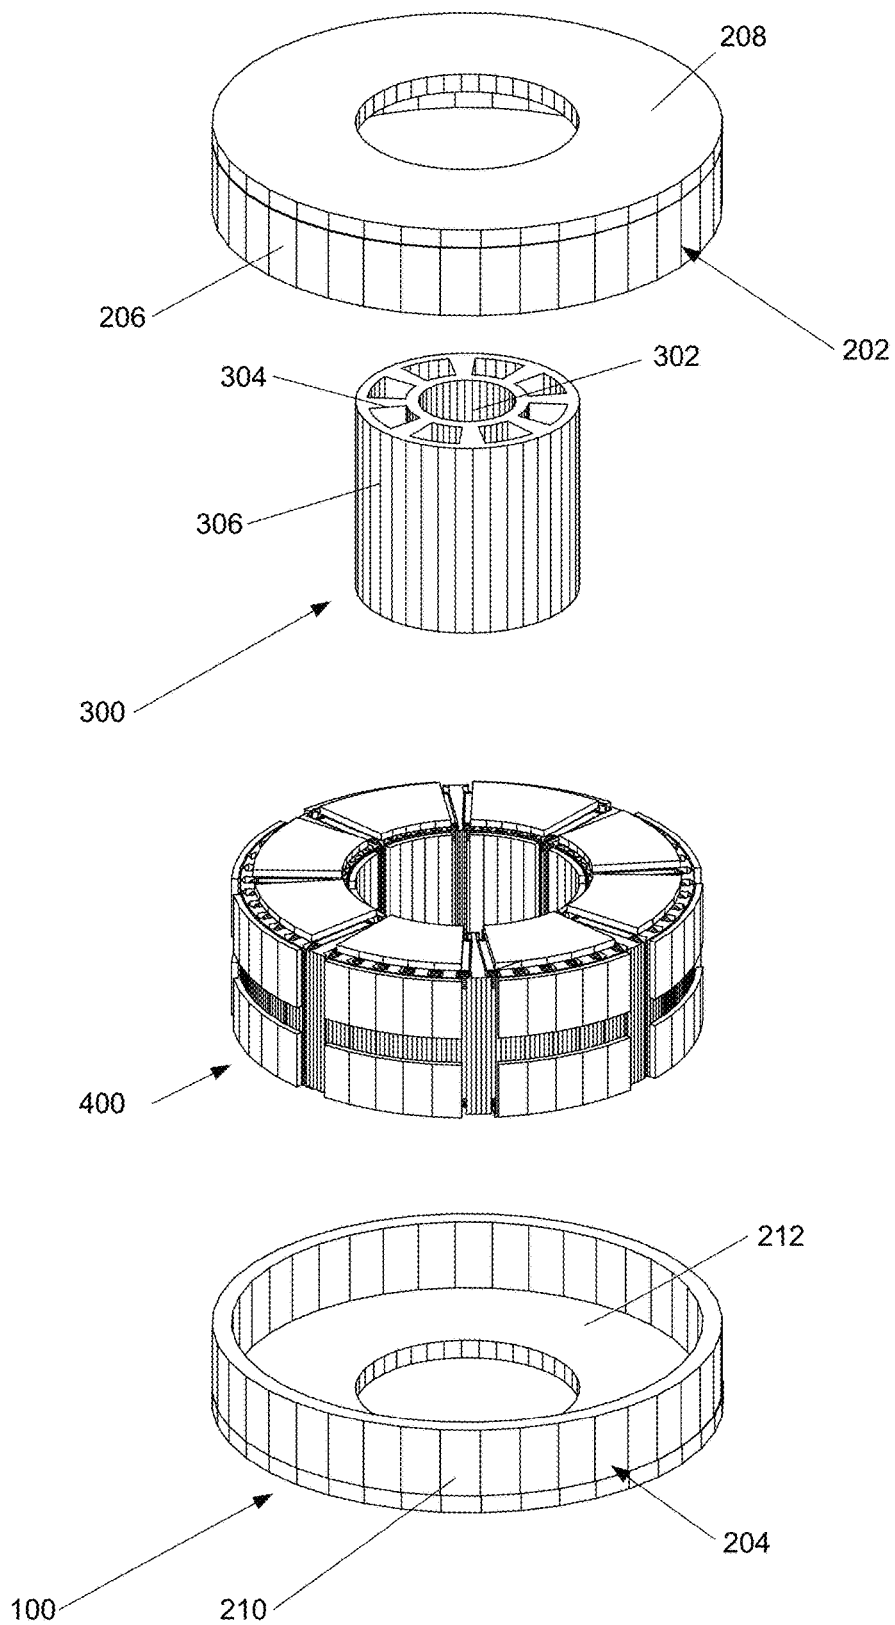


Fig. 1

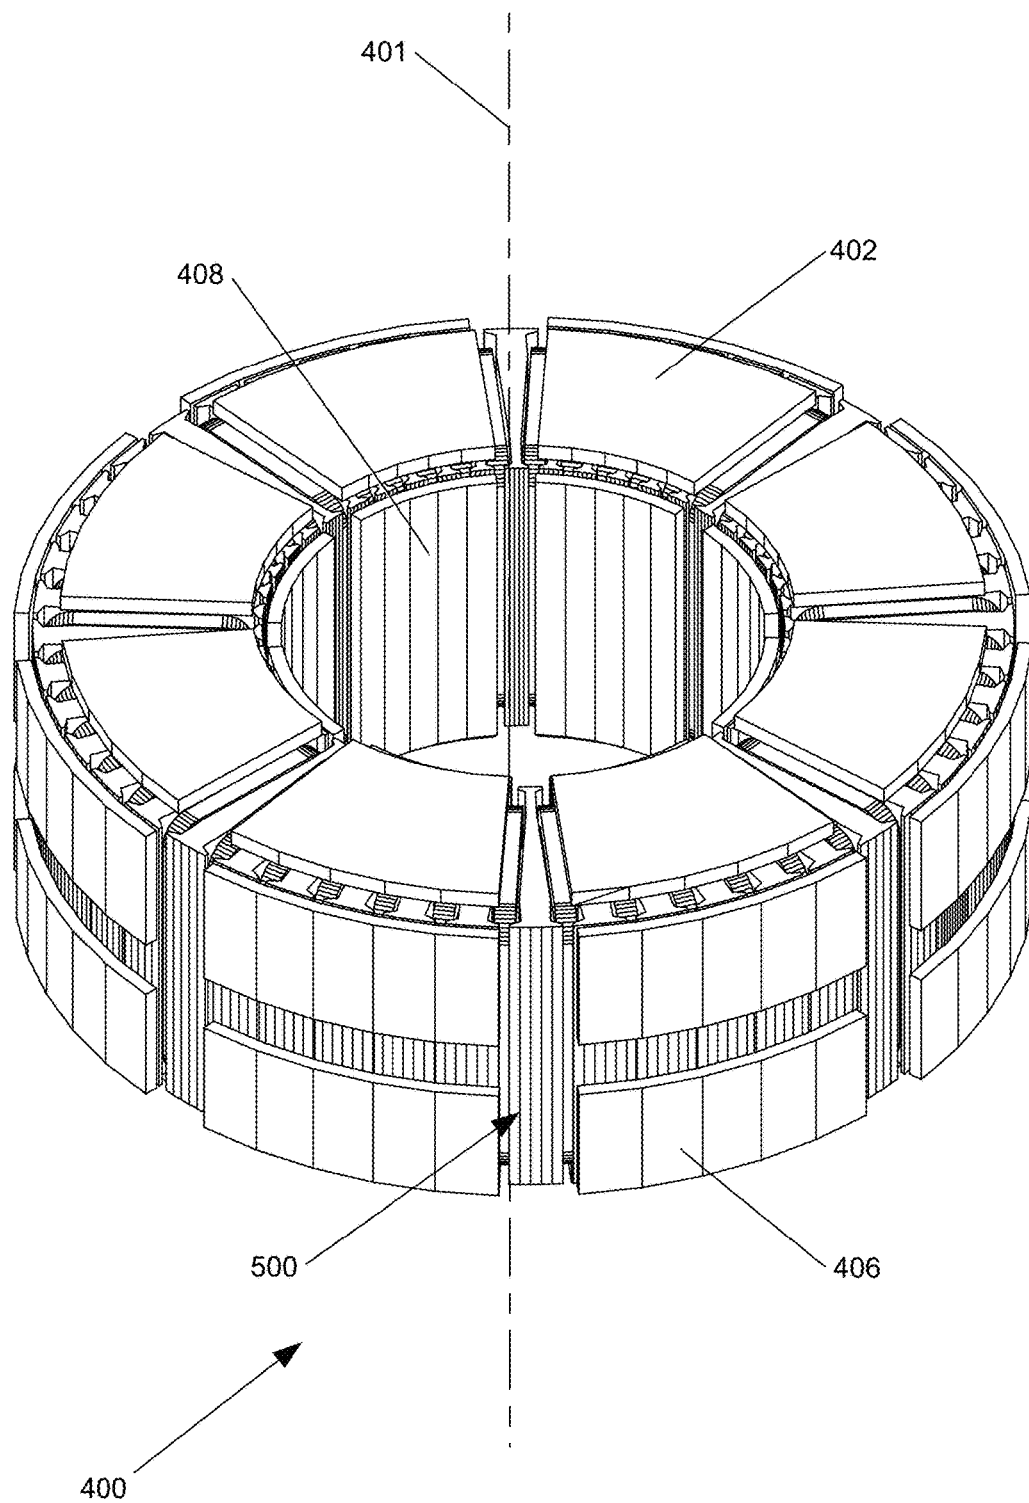


Fig. 2

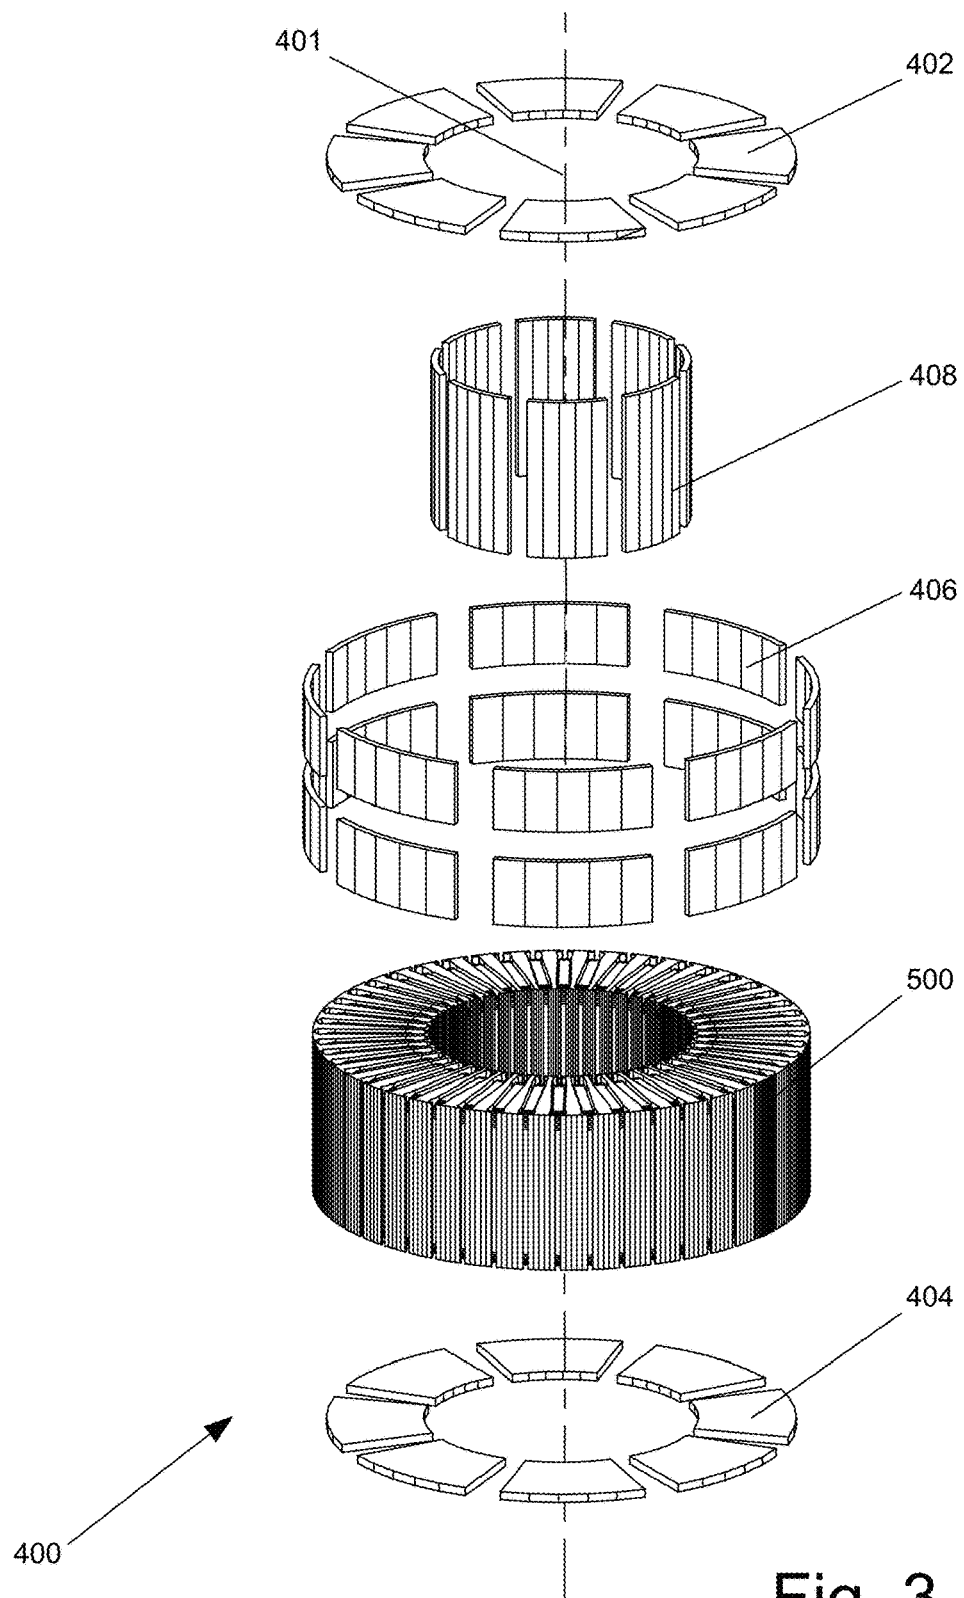


Fig. 3

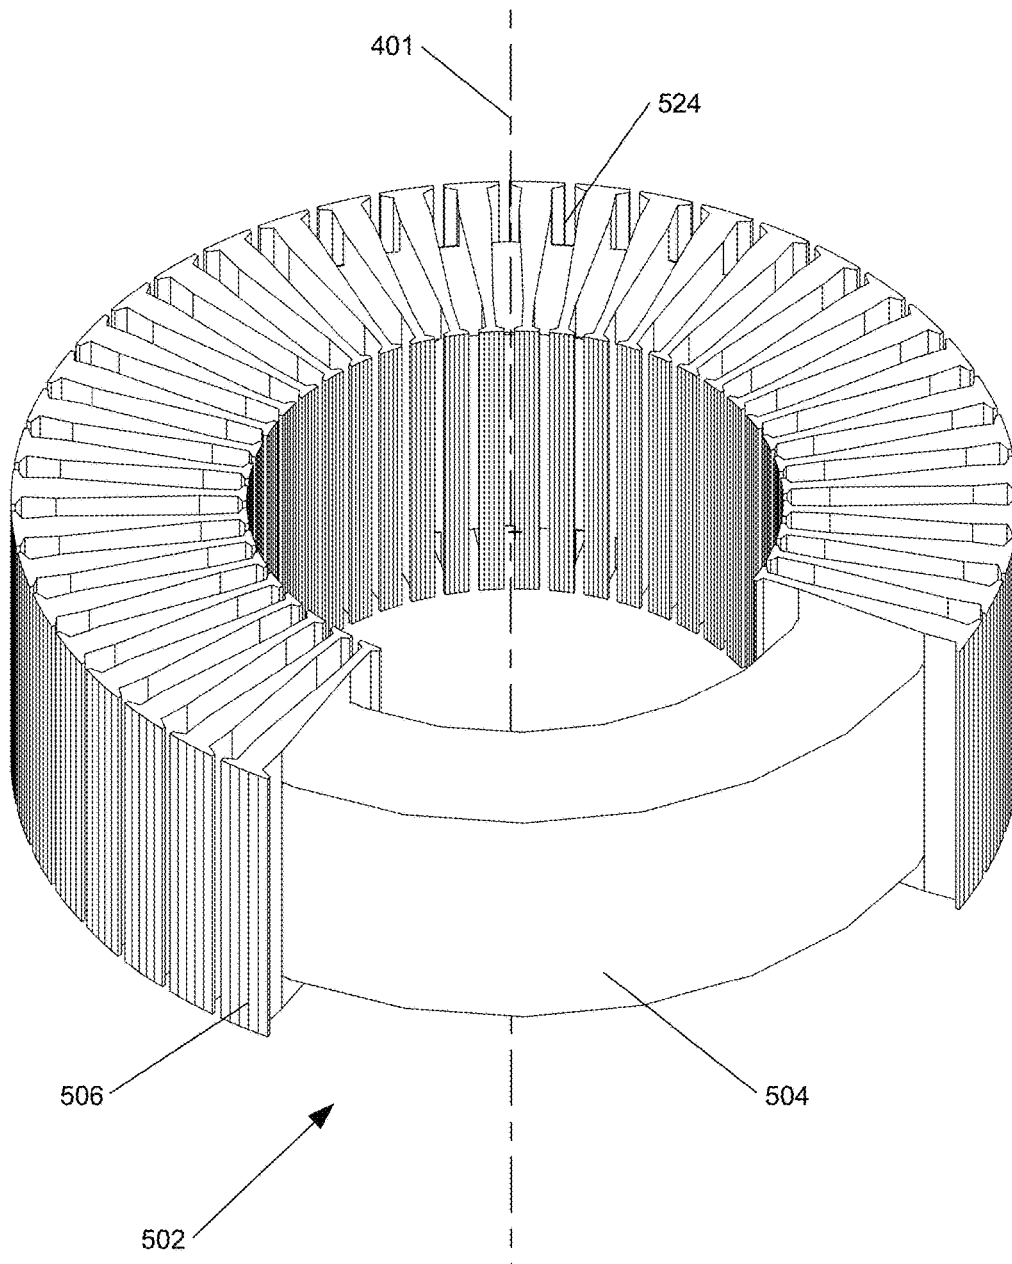


Fig. 4A

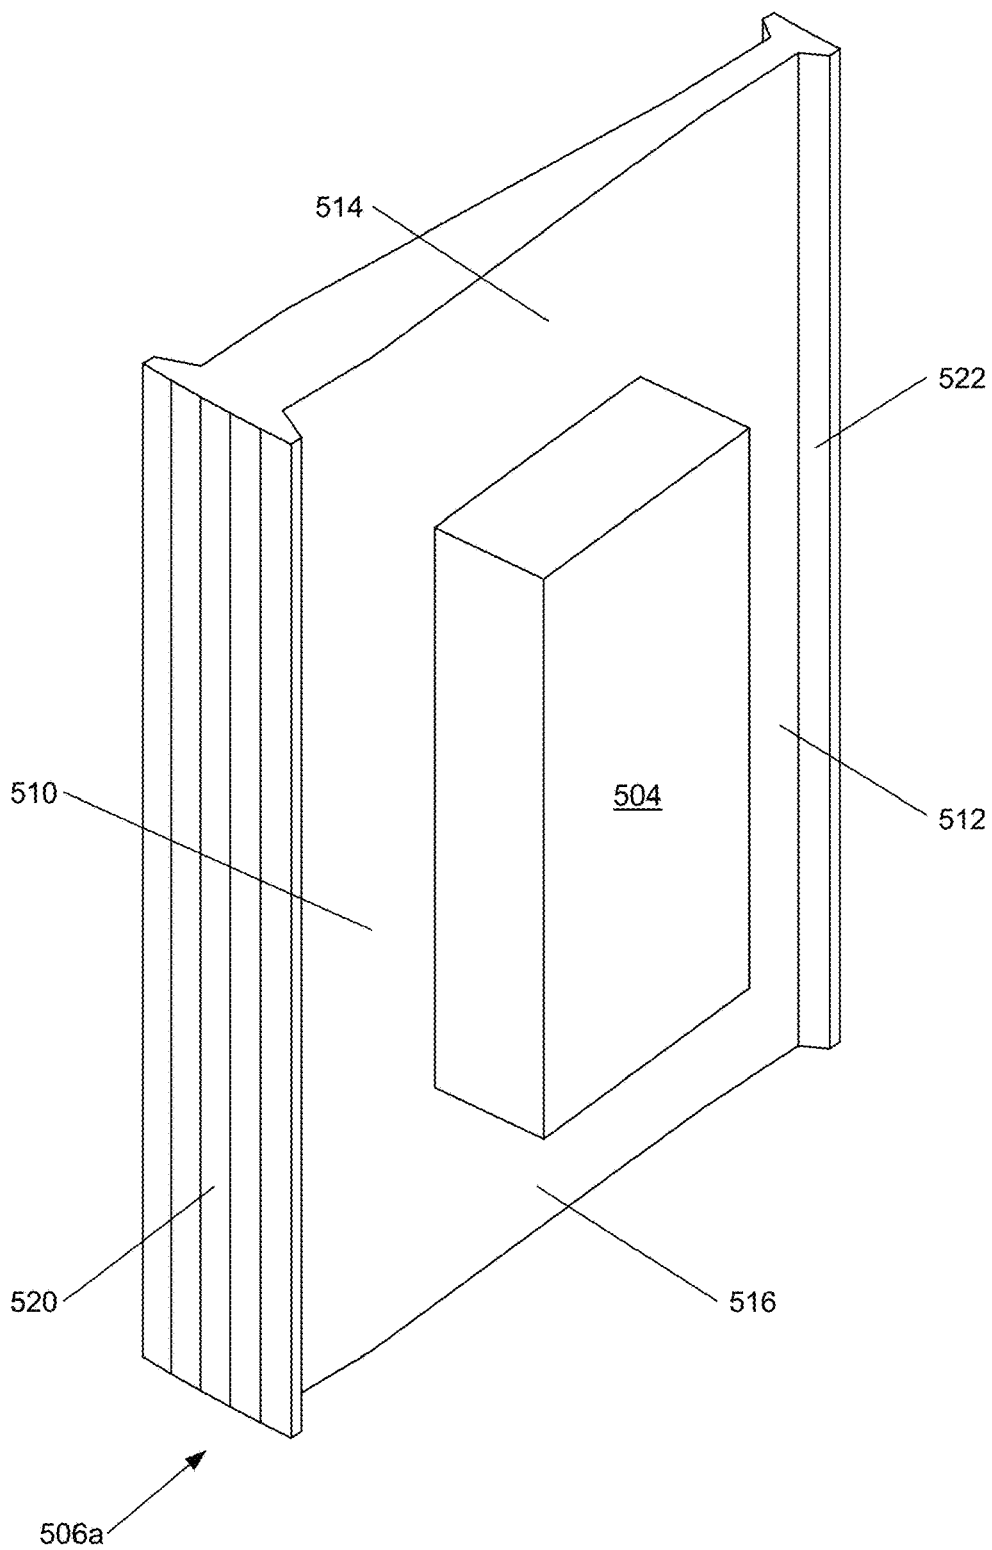


Fig. 4B

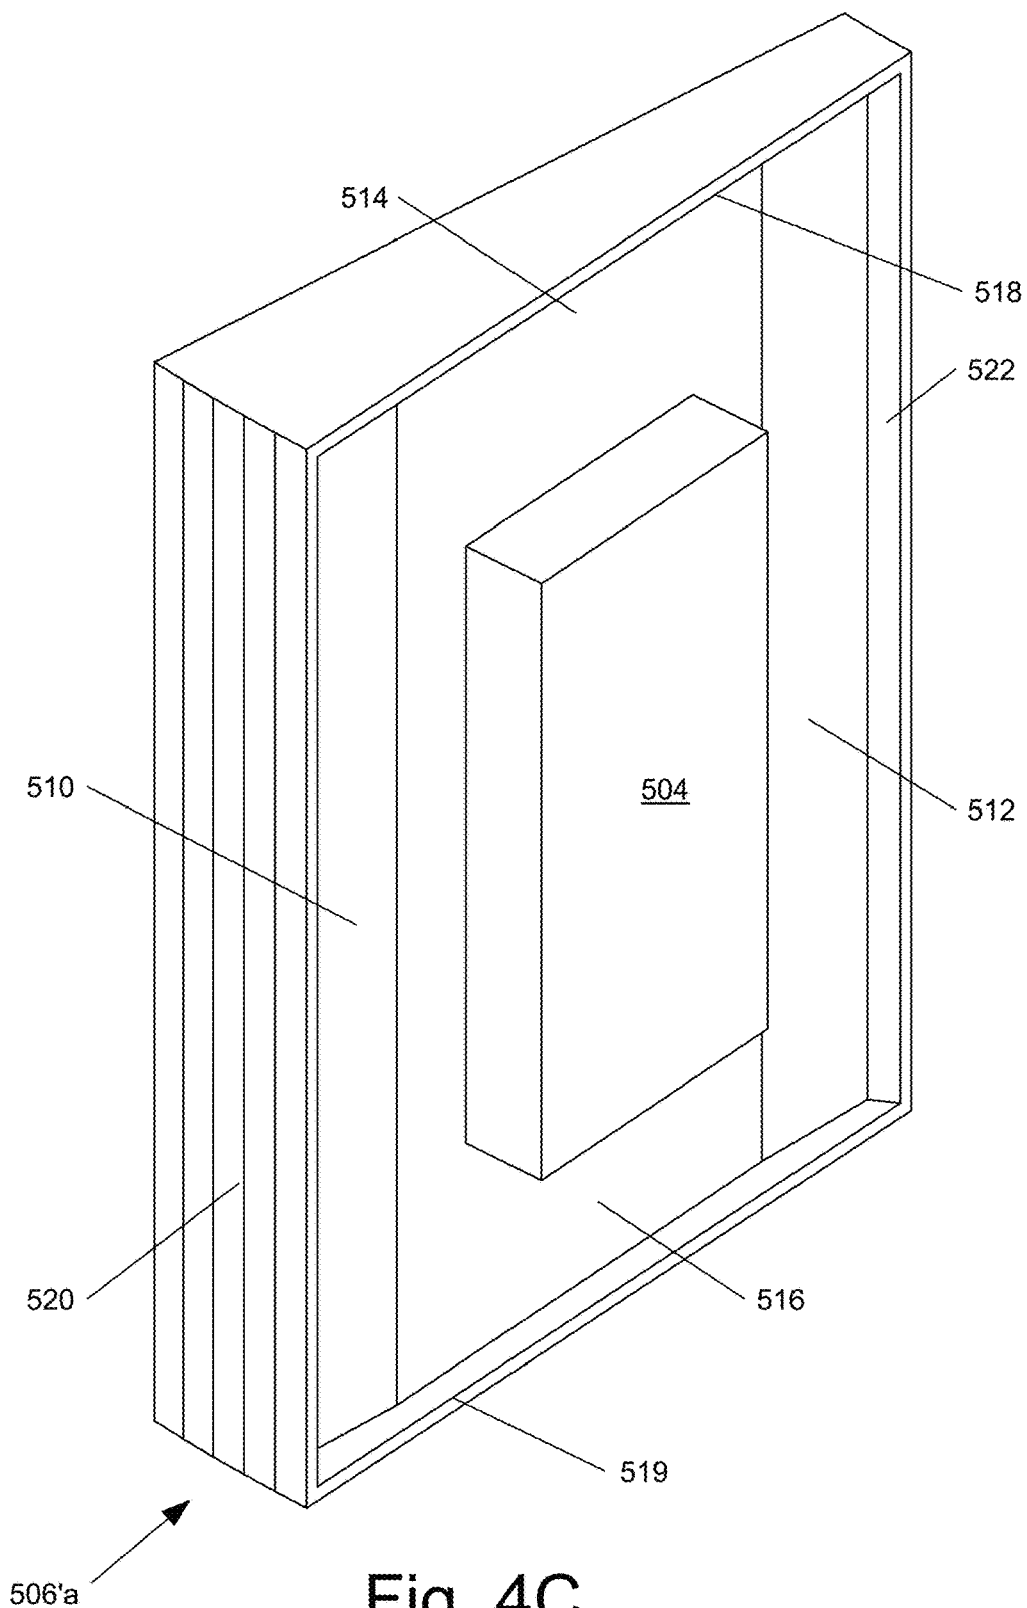


Fig. 4C

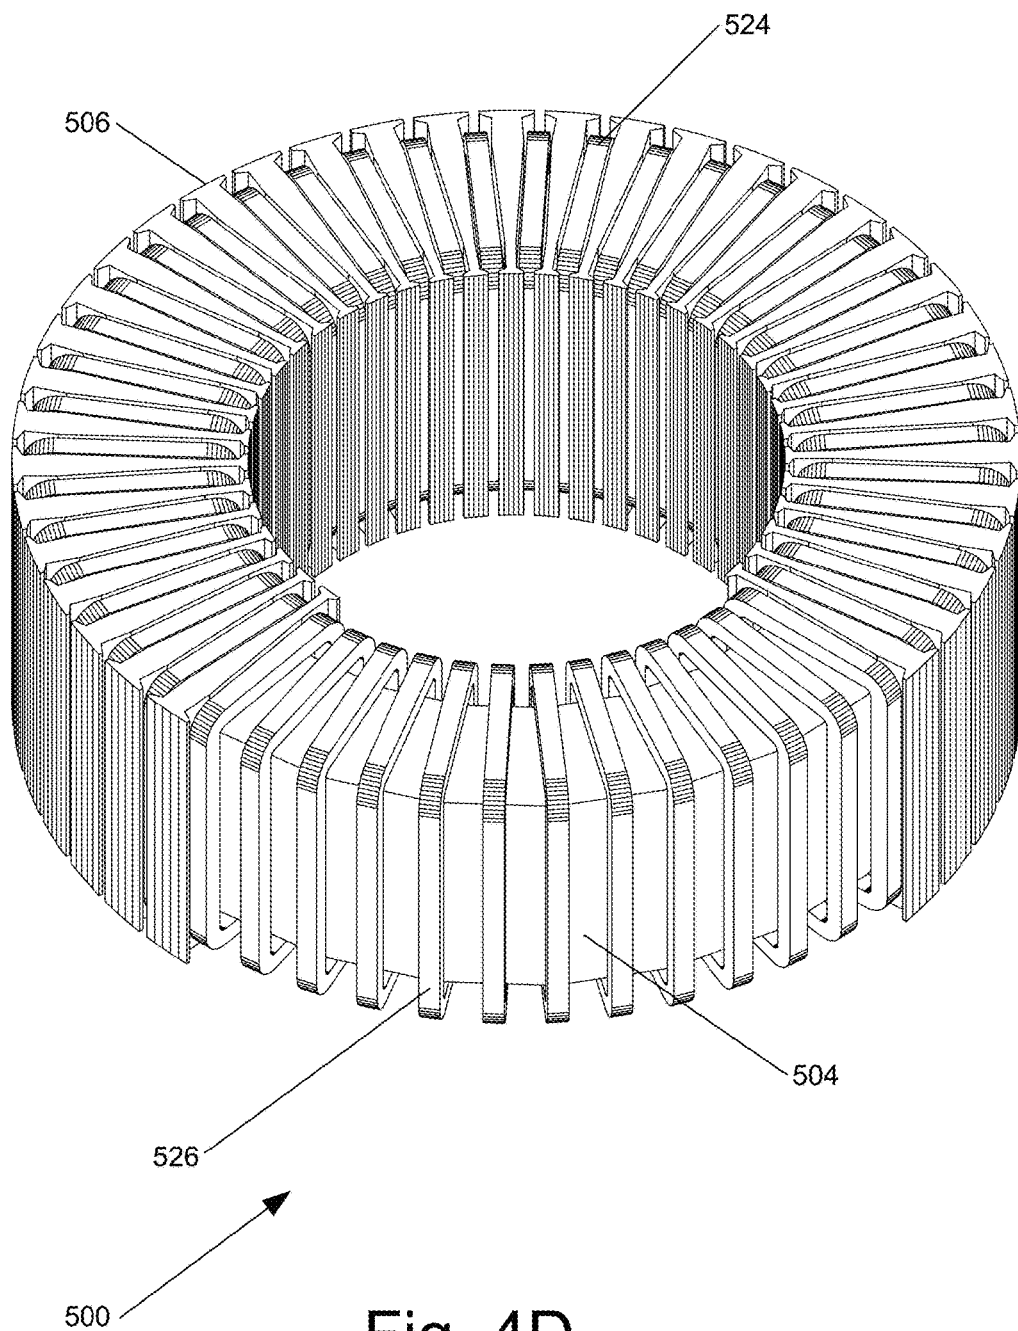


Fig. 4D

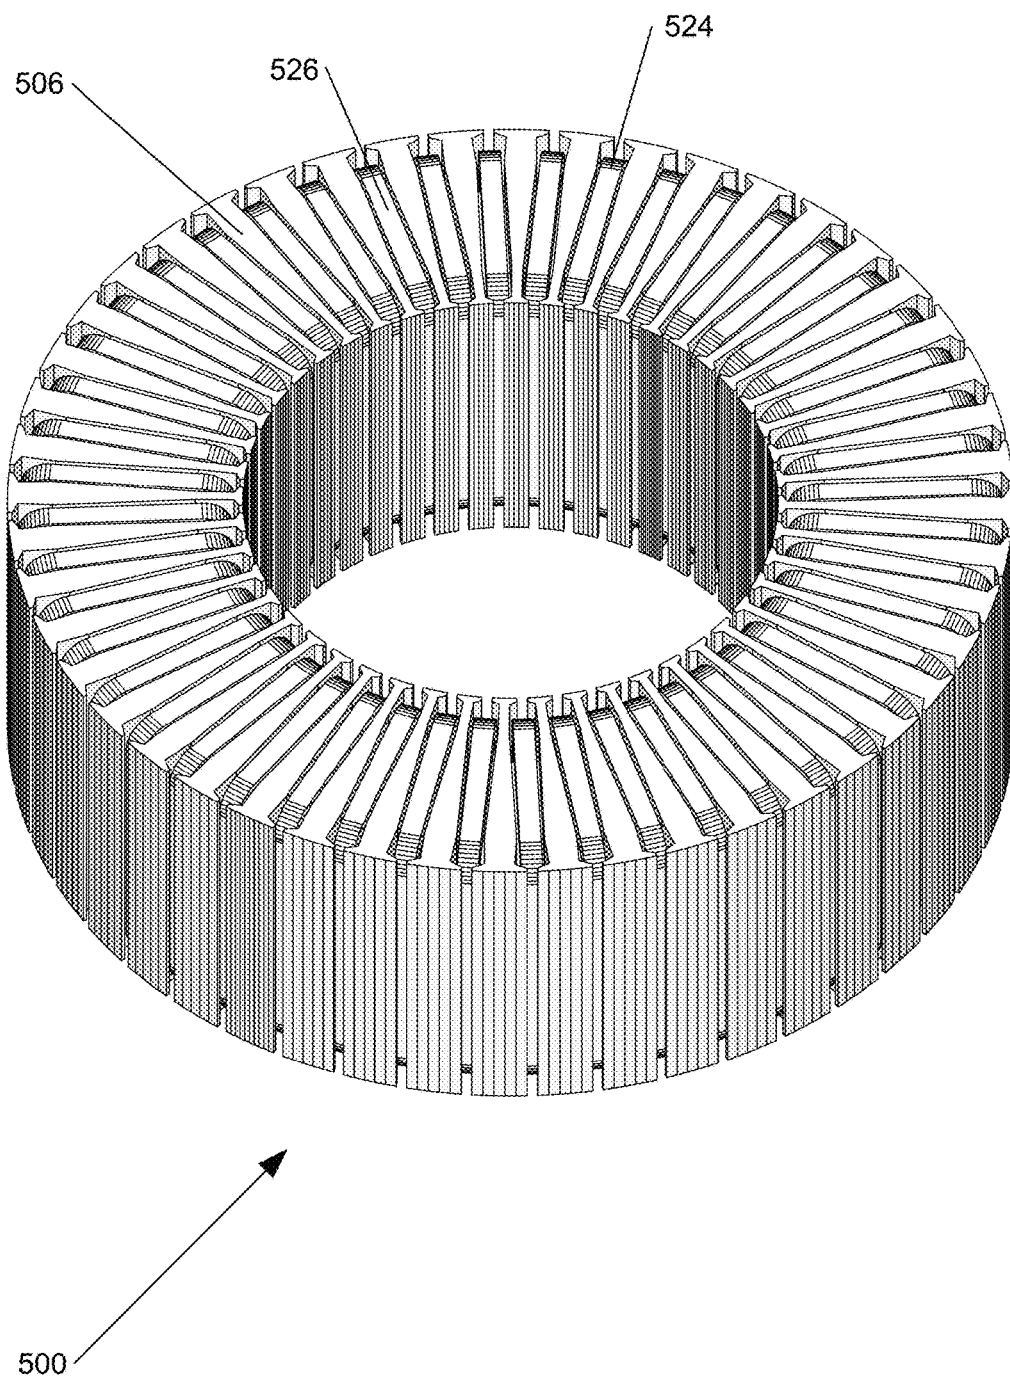


Fig. 4E

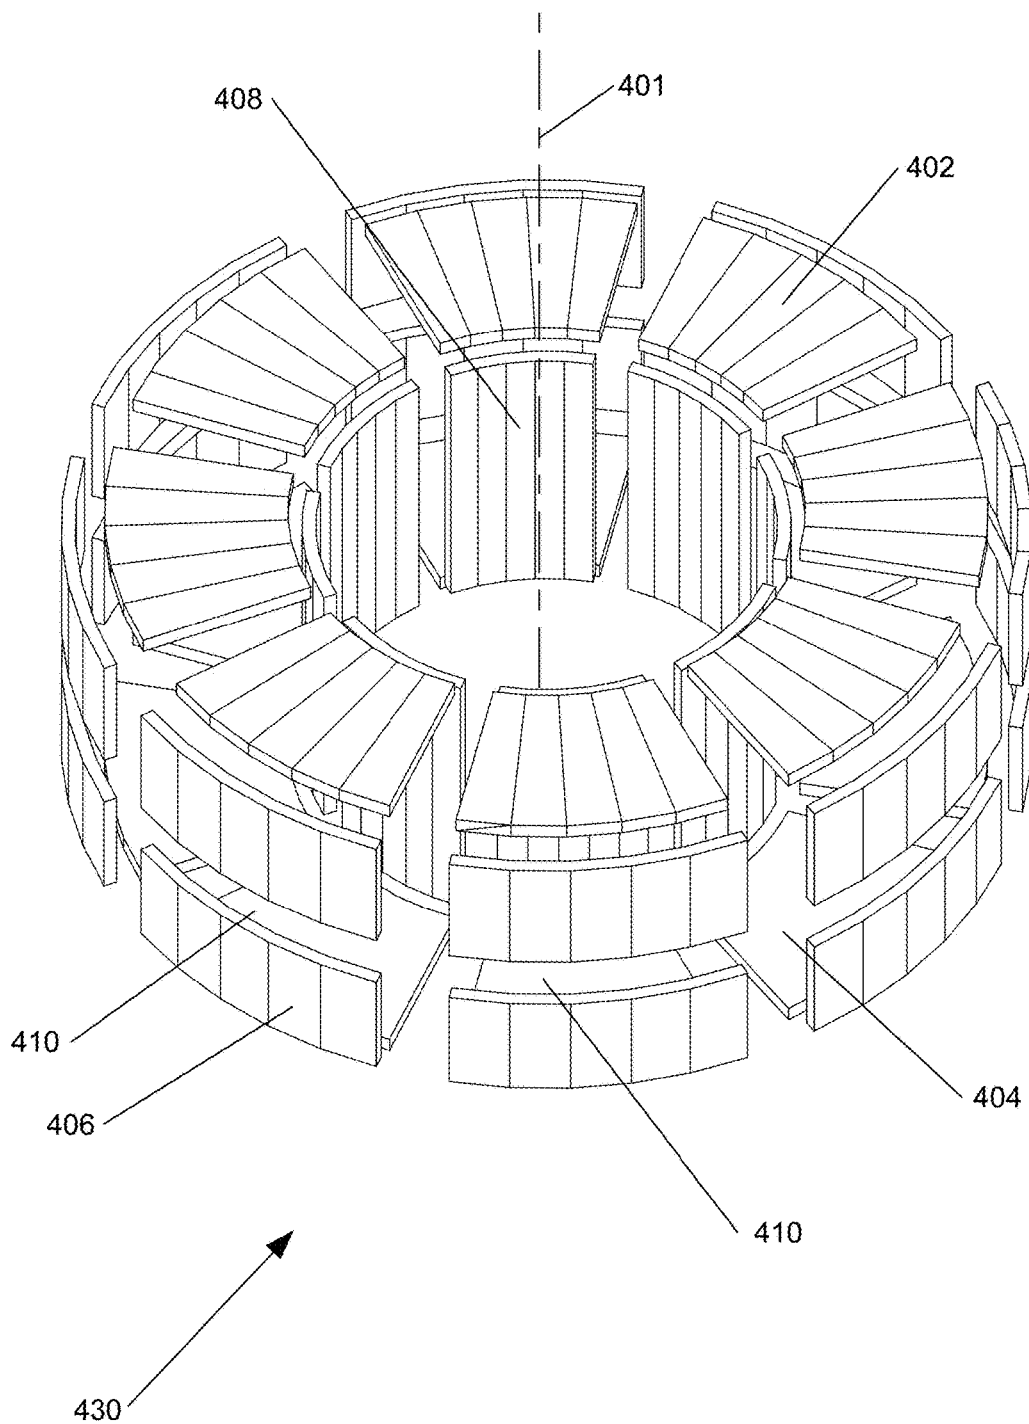


Fig. 5A

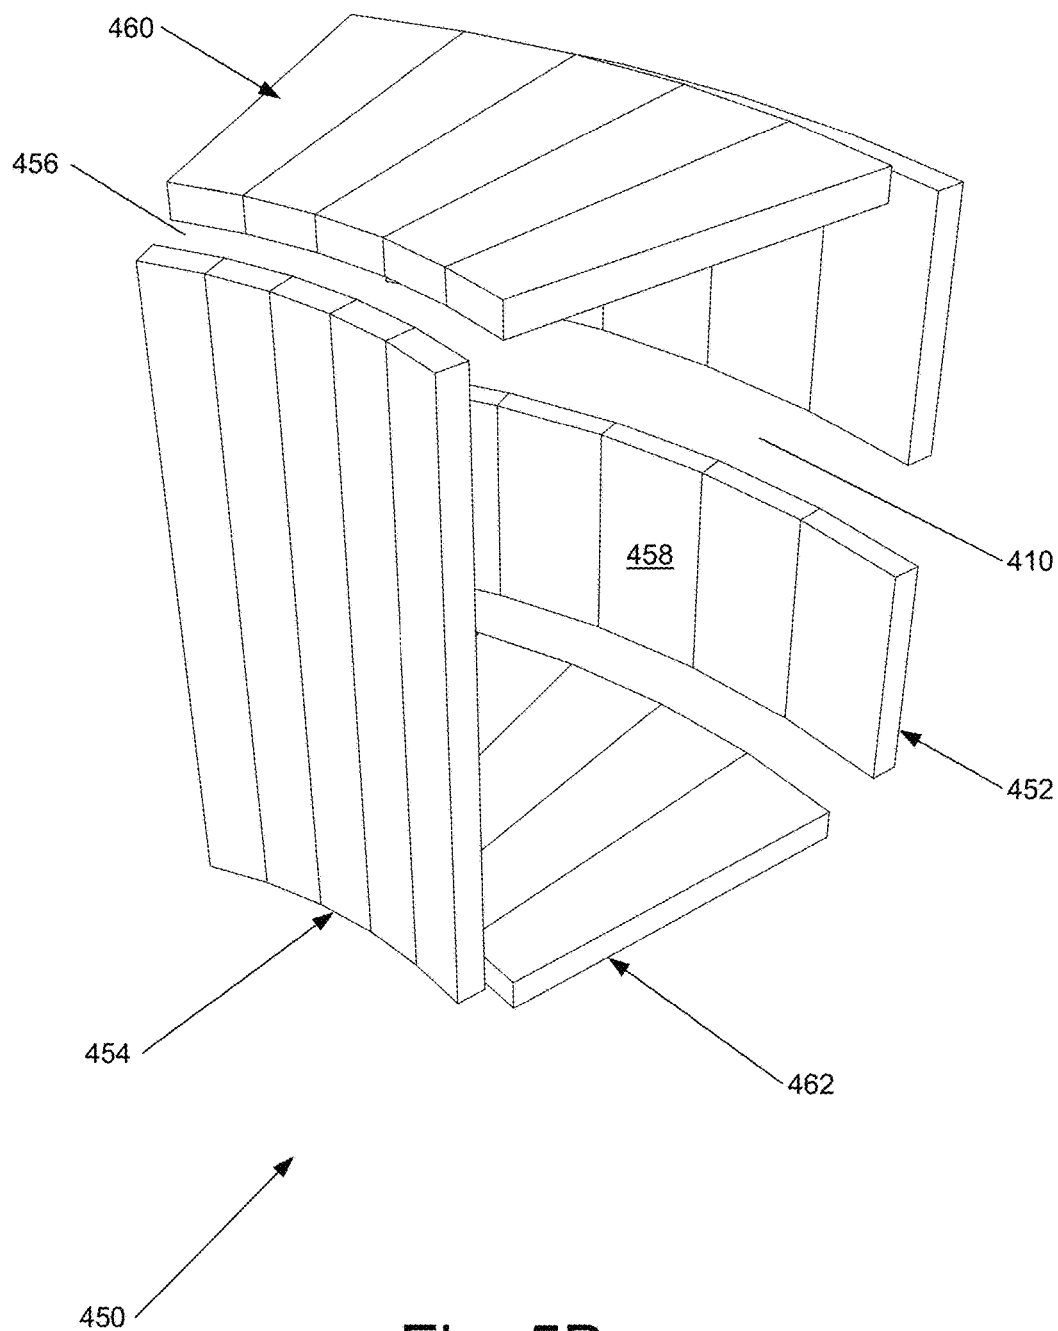


Fig. 5B

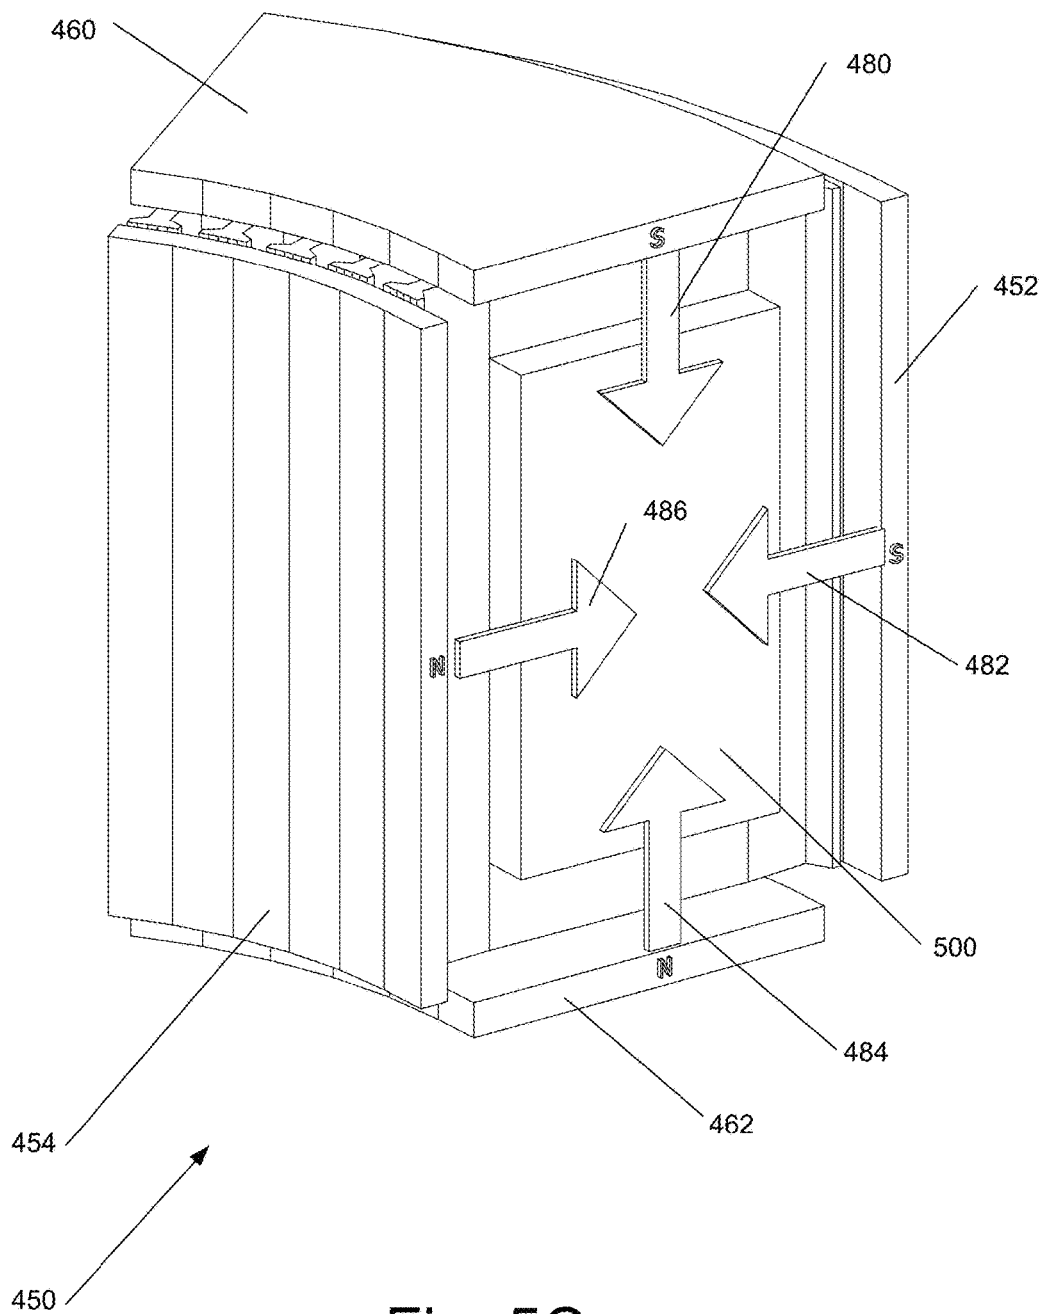


Fig. 5C

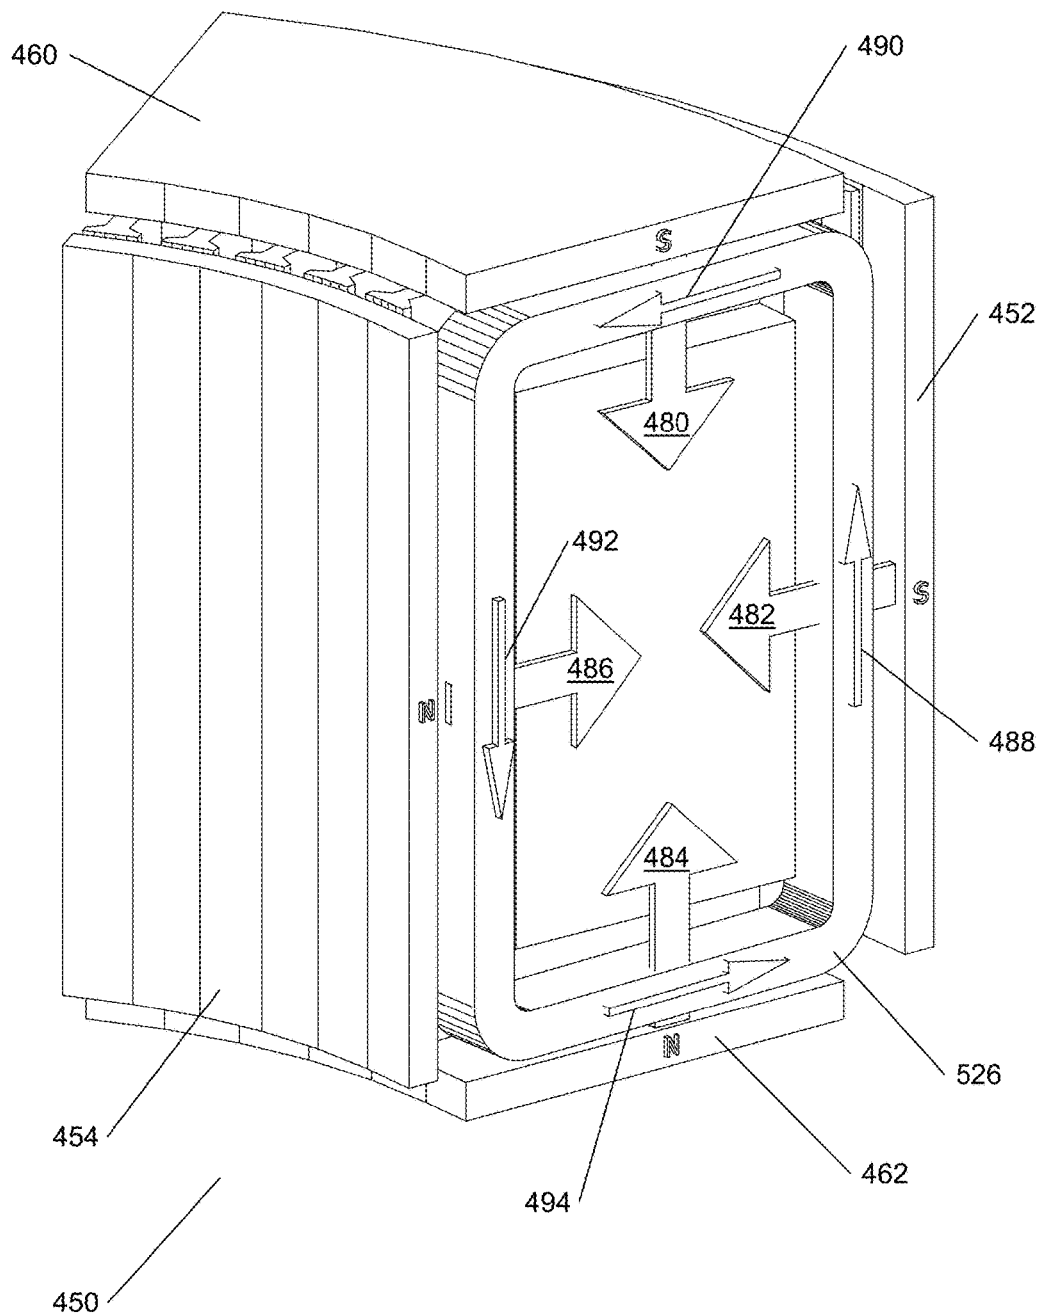


Fig. 5D

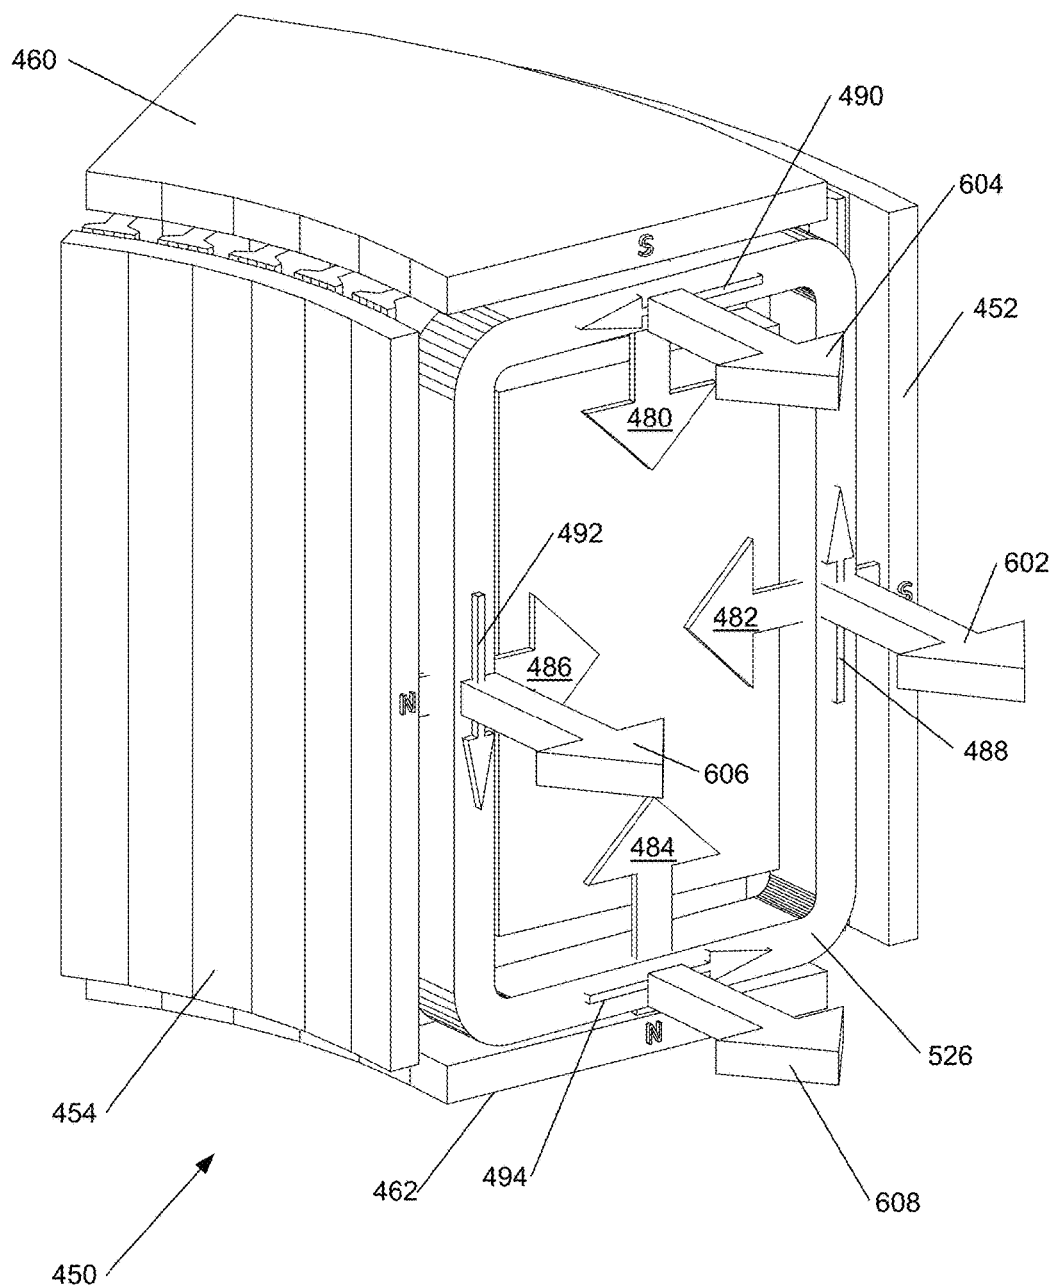


Fig. 5E

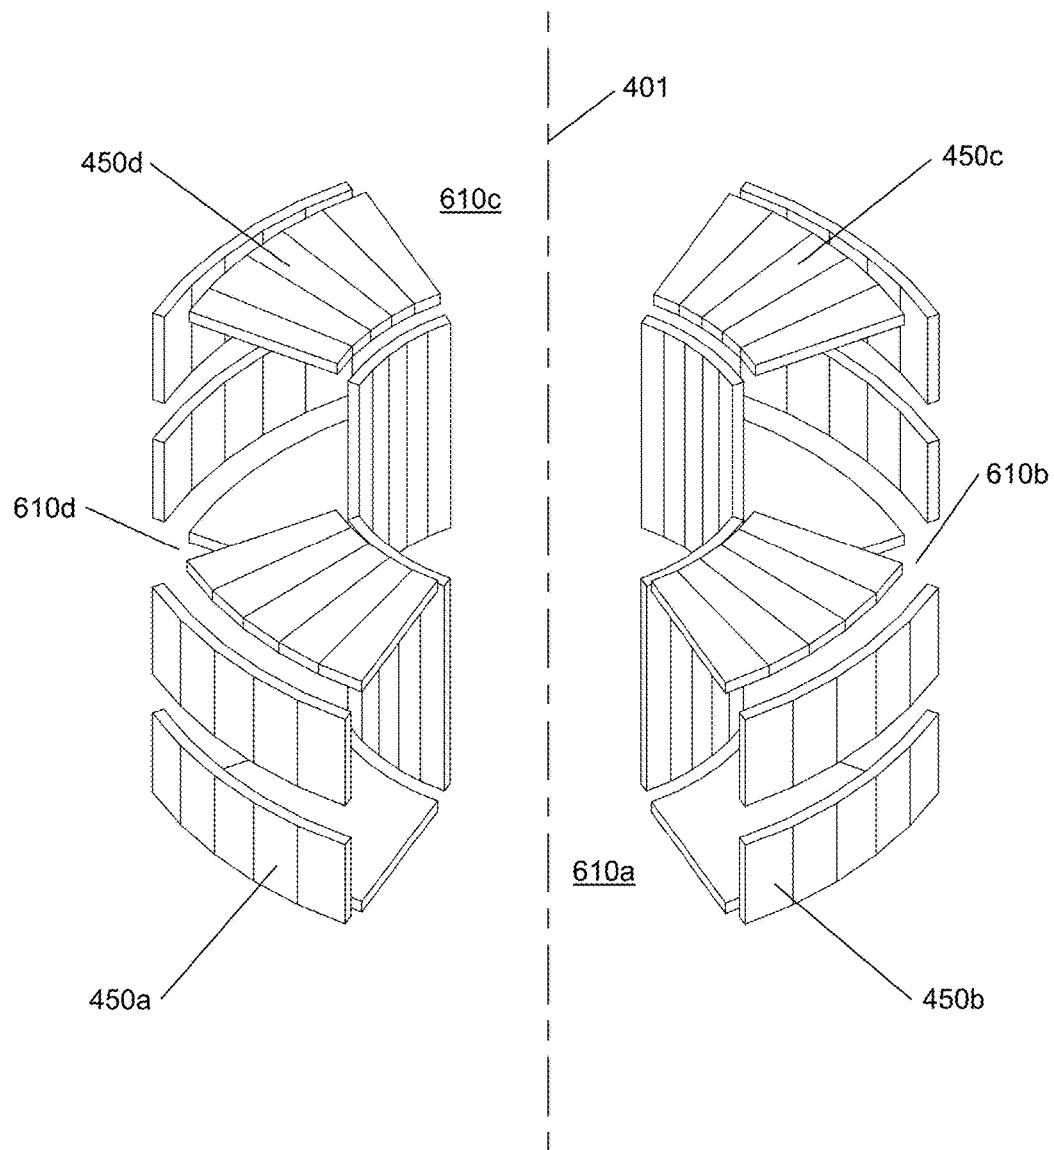
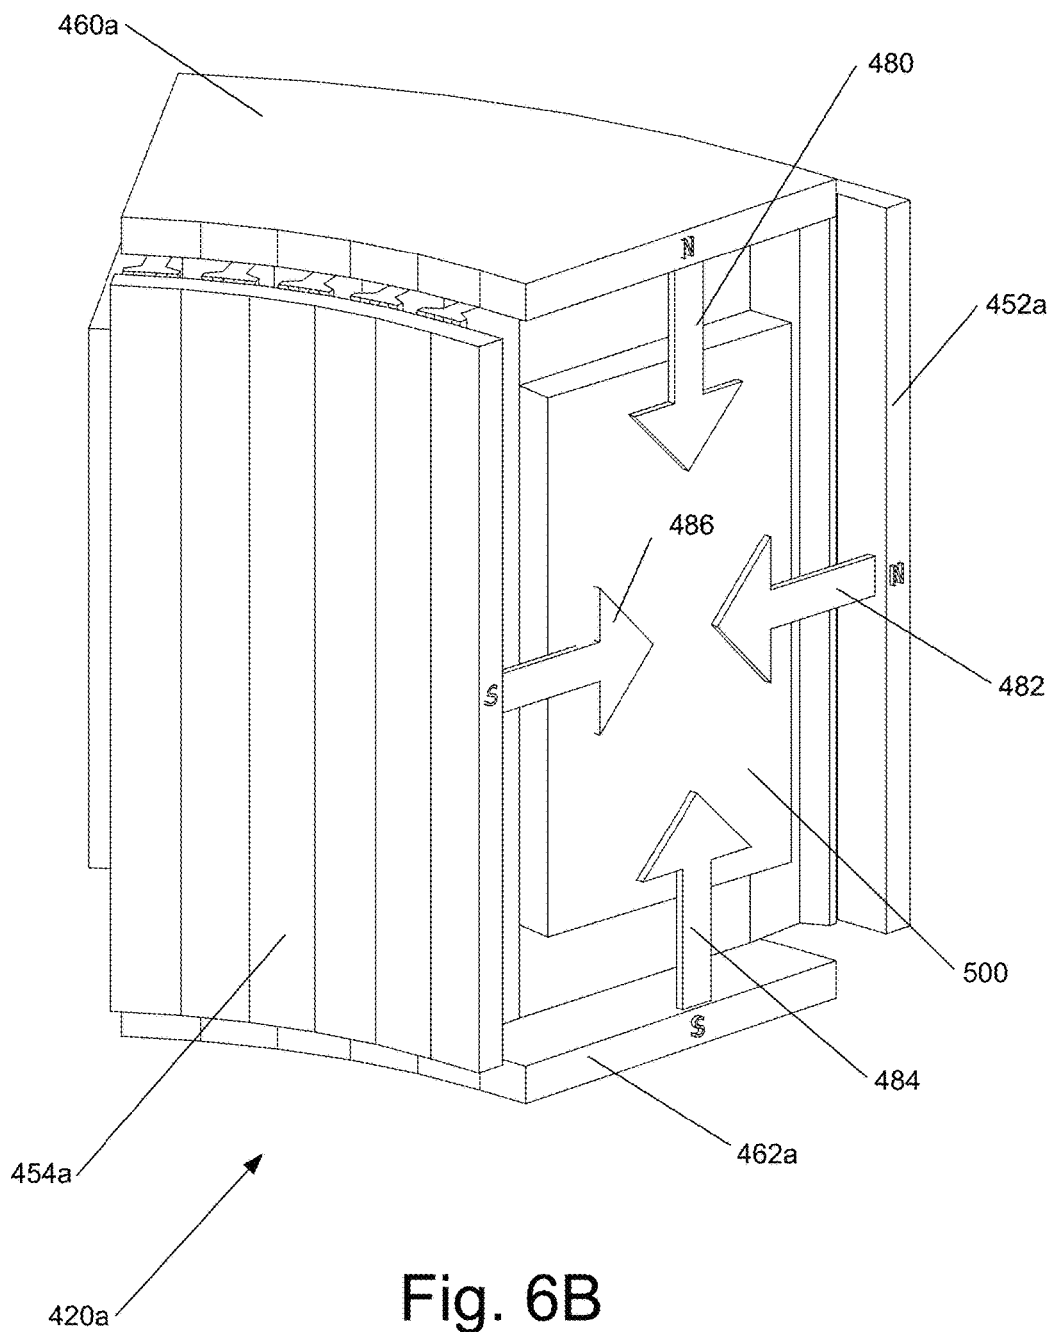


Fig. 6A



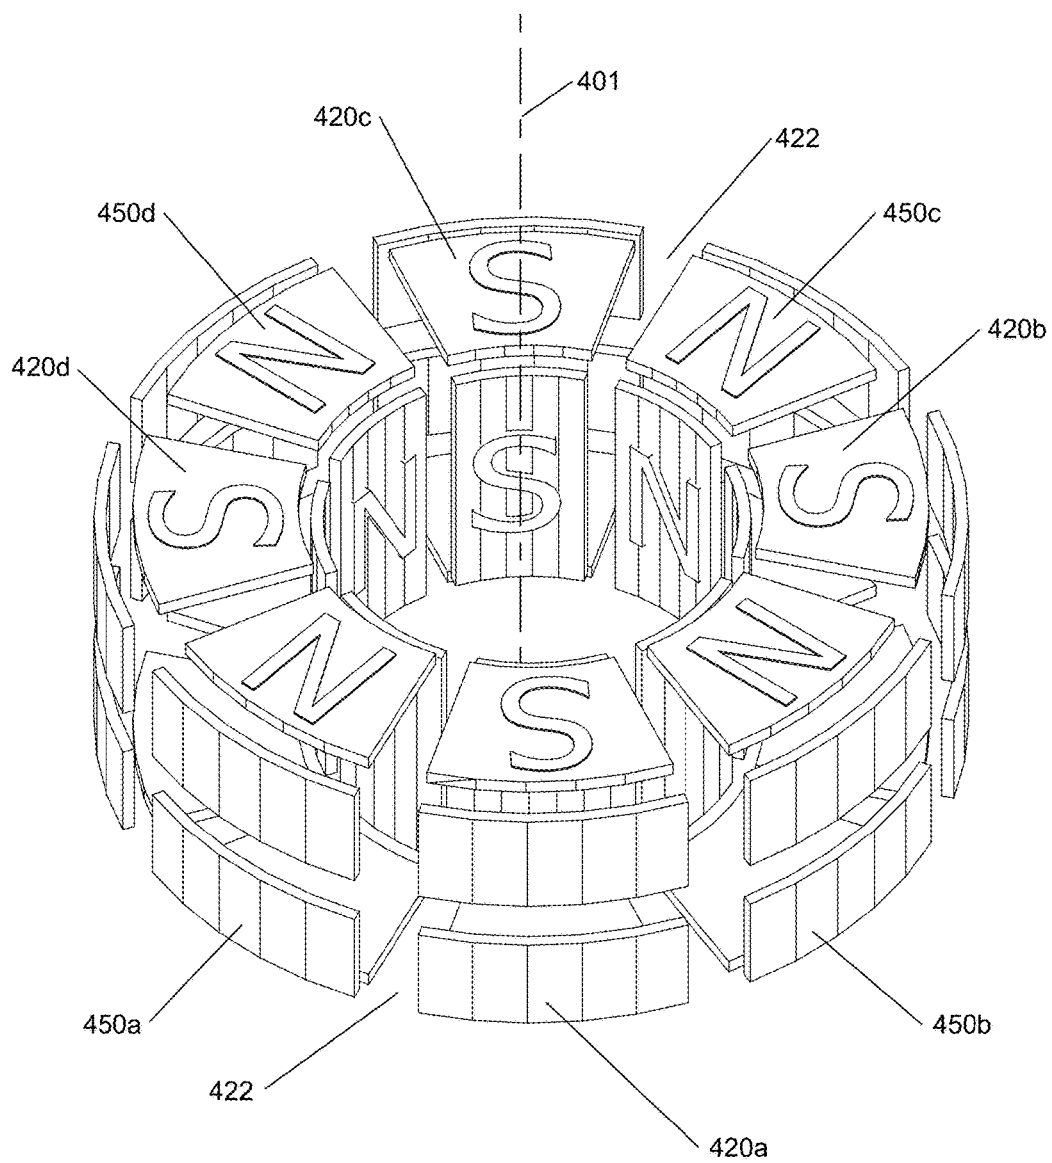


Fig. 6C

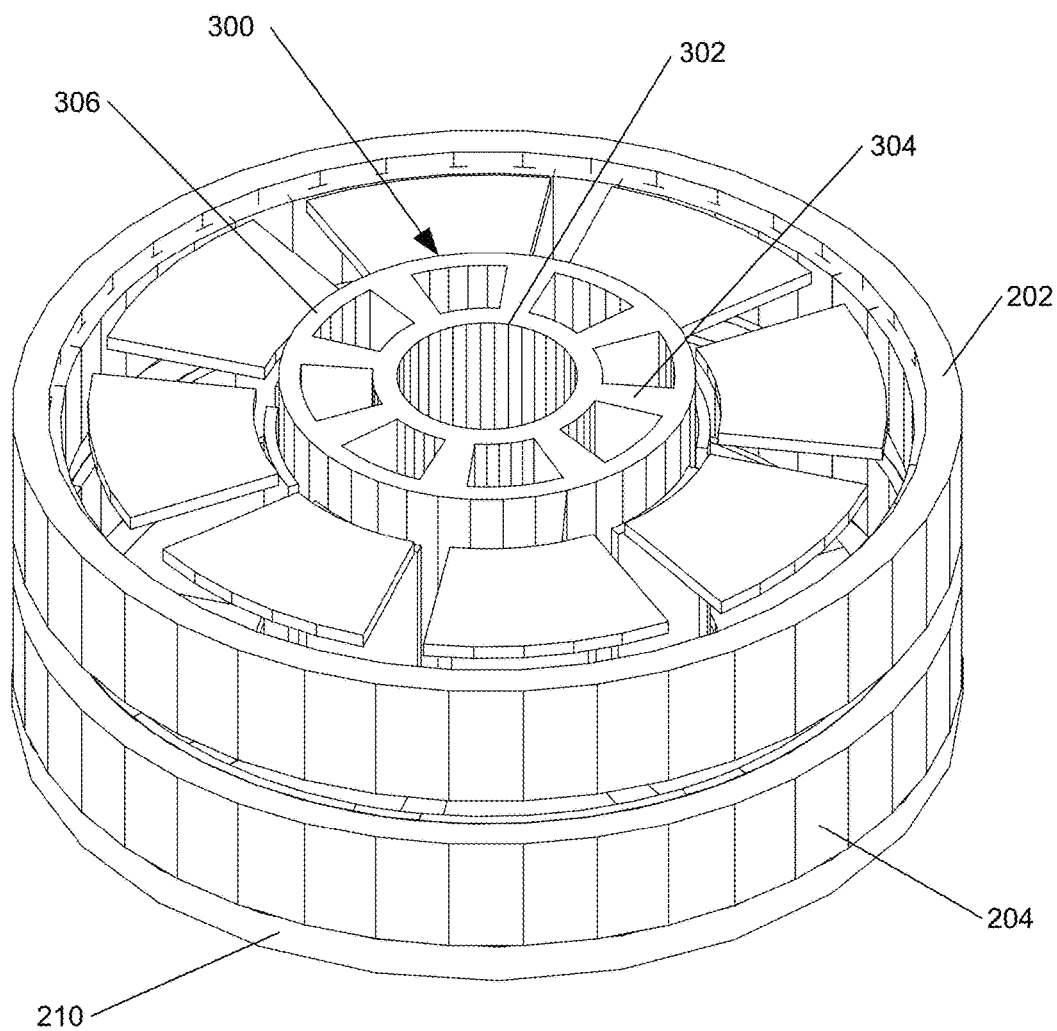


Fig. 7A

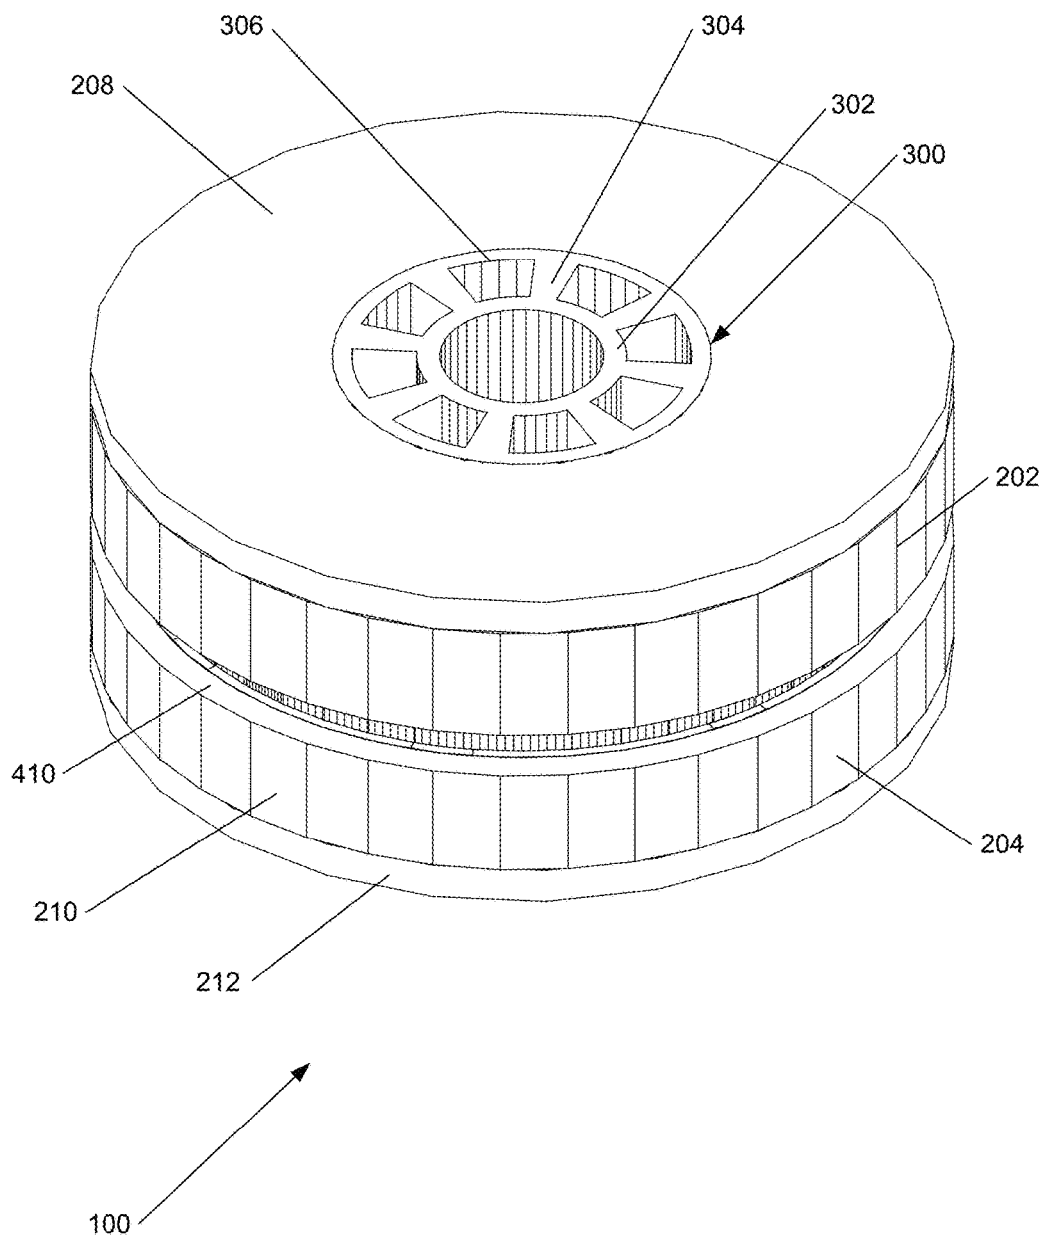


Fig. 7B

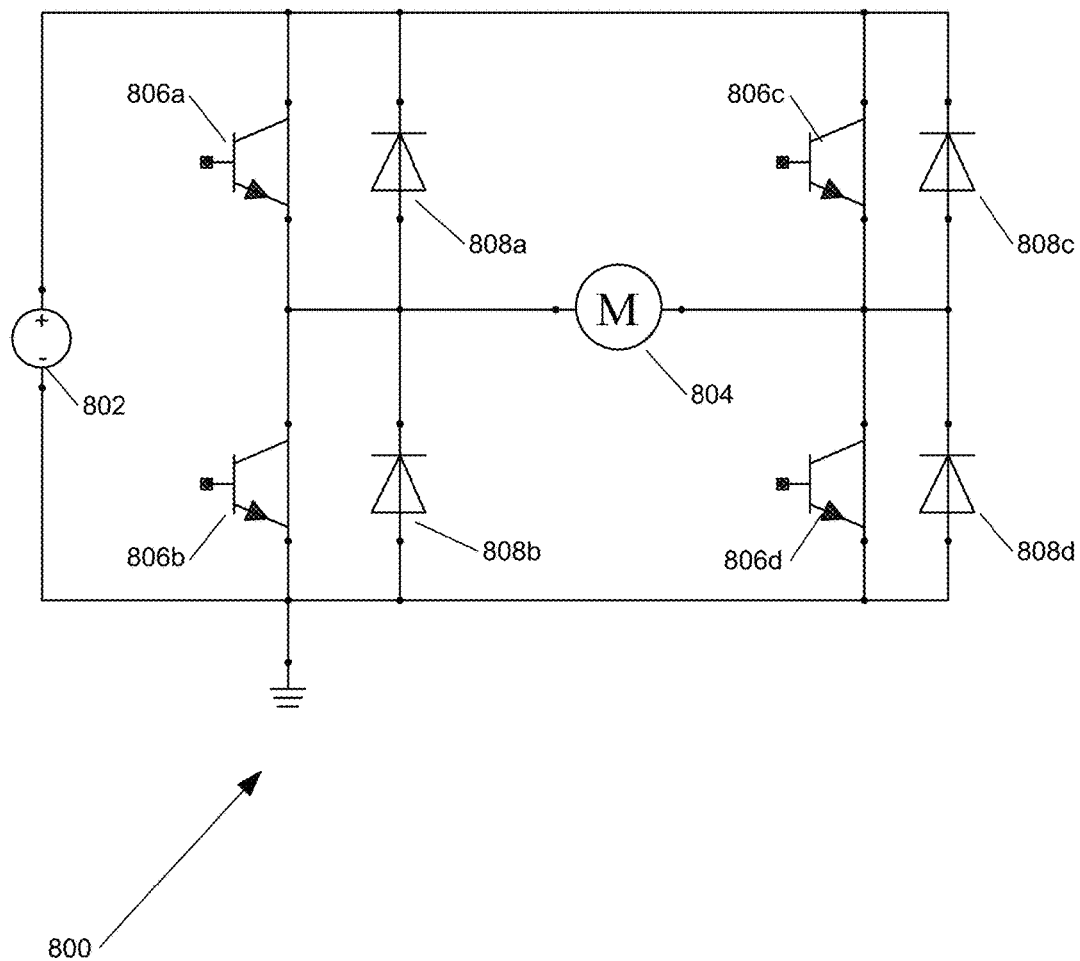


Fig. 8

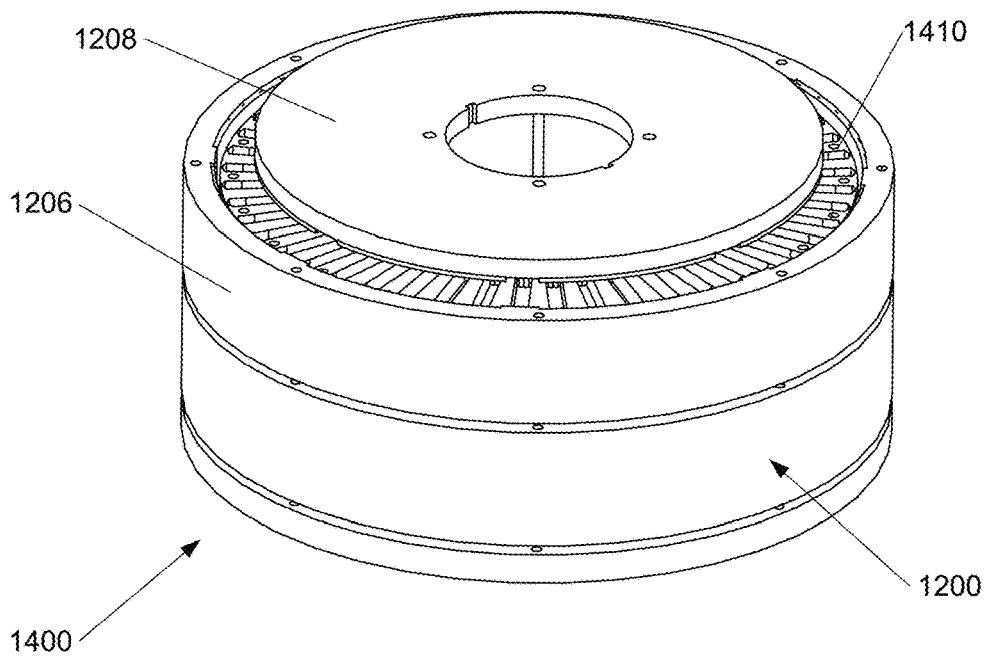


Fig. 9A

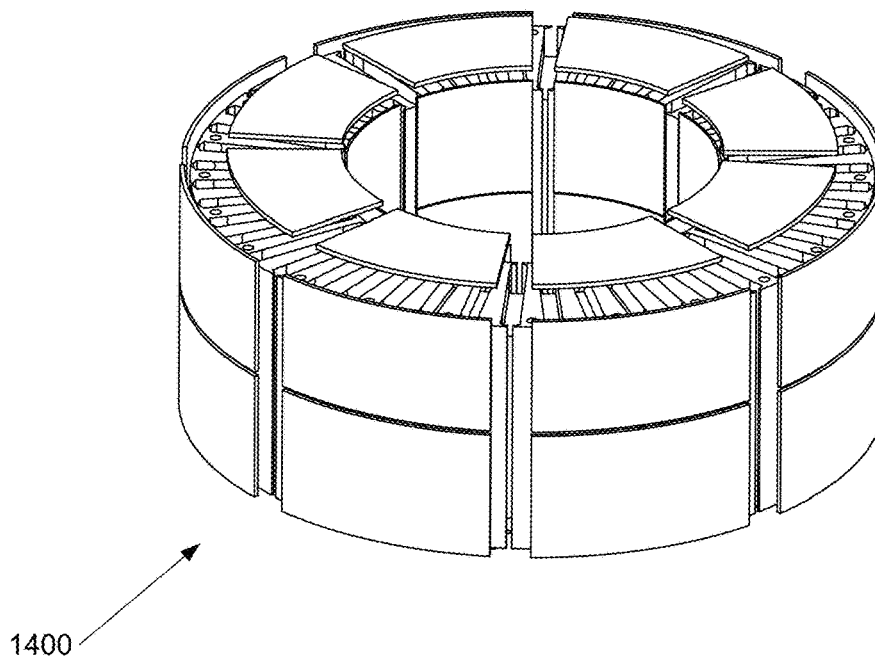


Fig. 9B

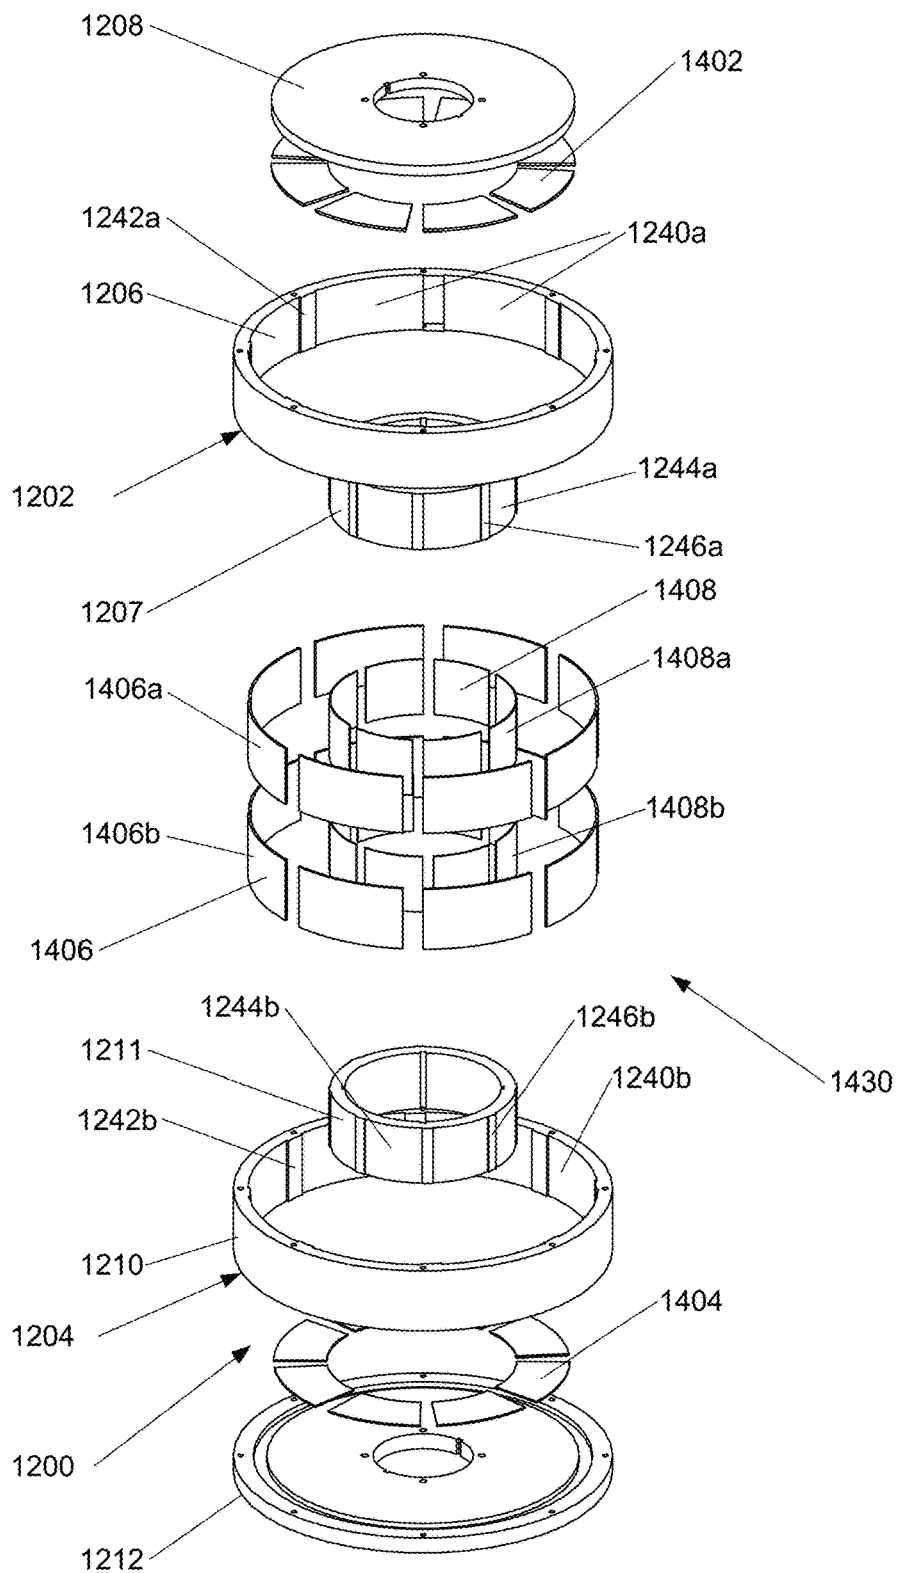


Fig. 9C

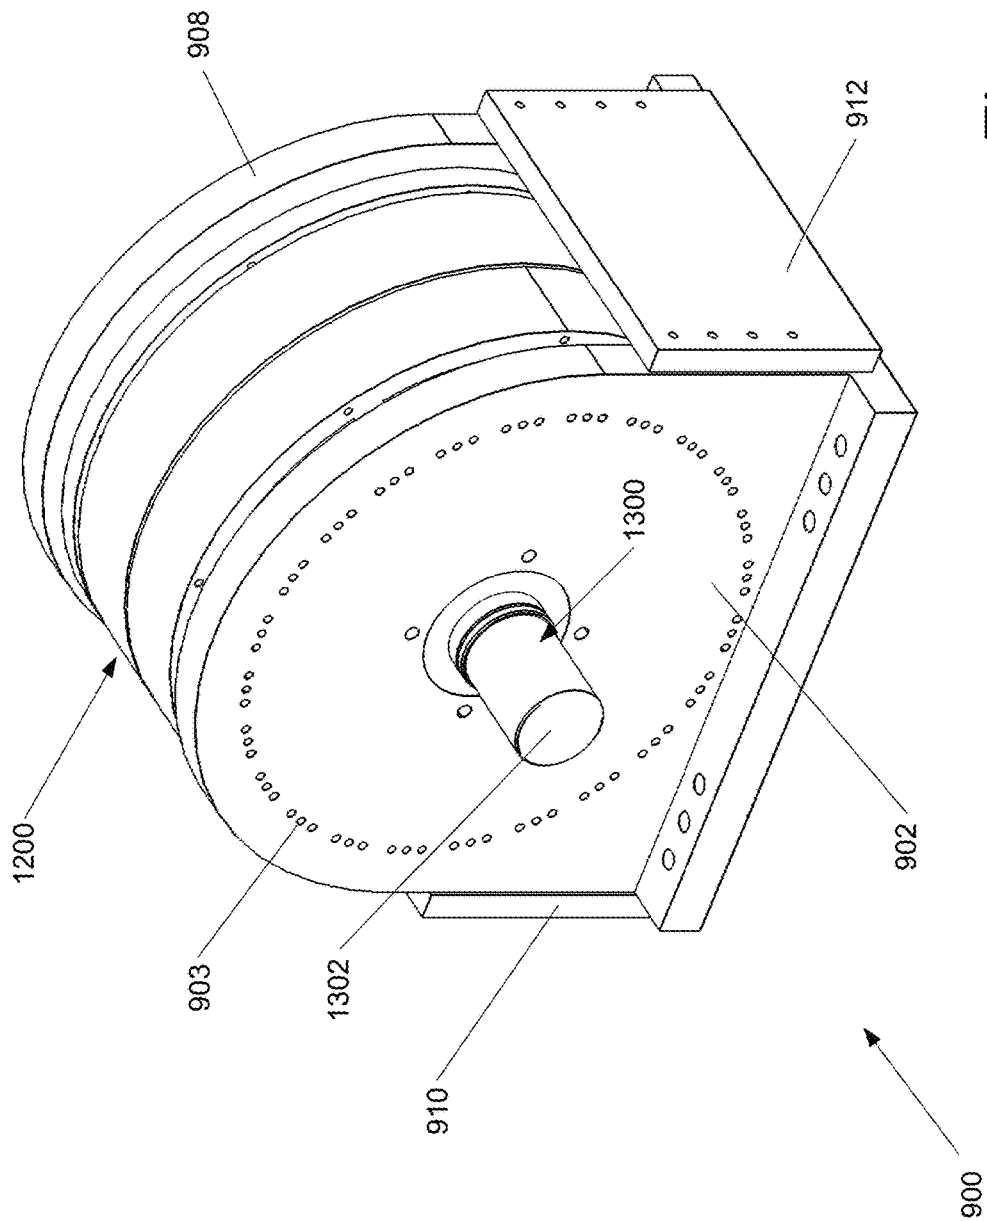


Fig. 10A

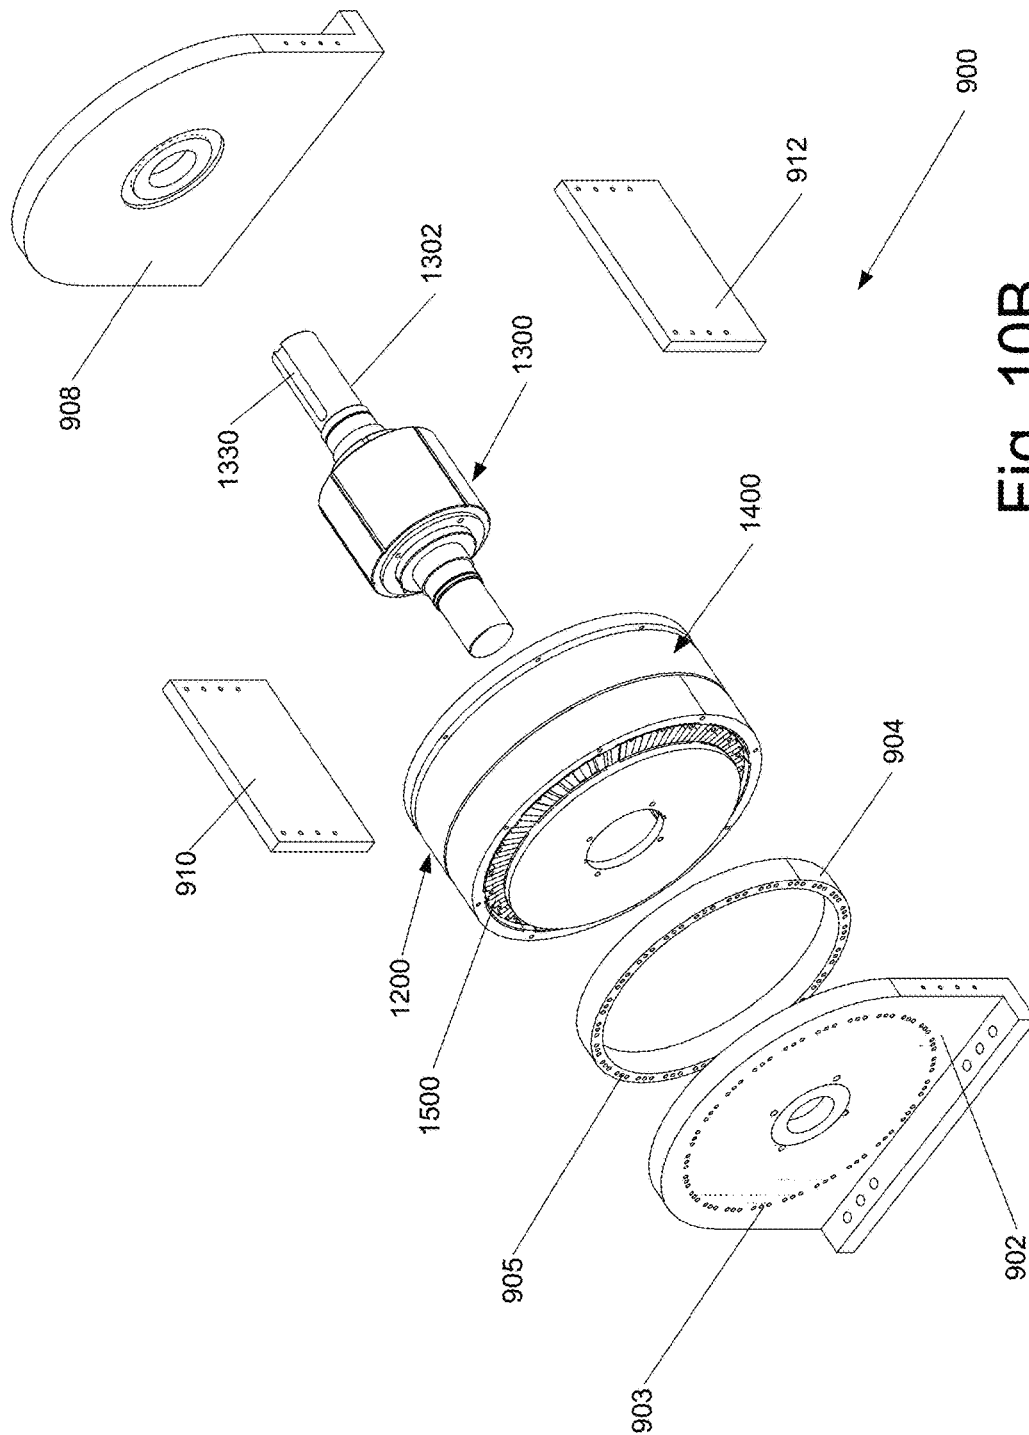


Fig. 10B

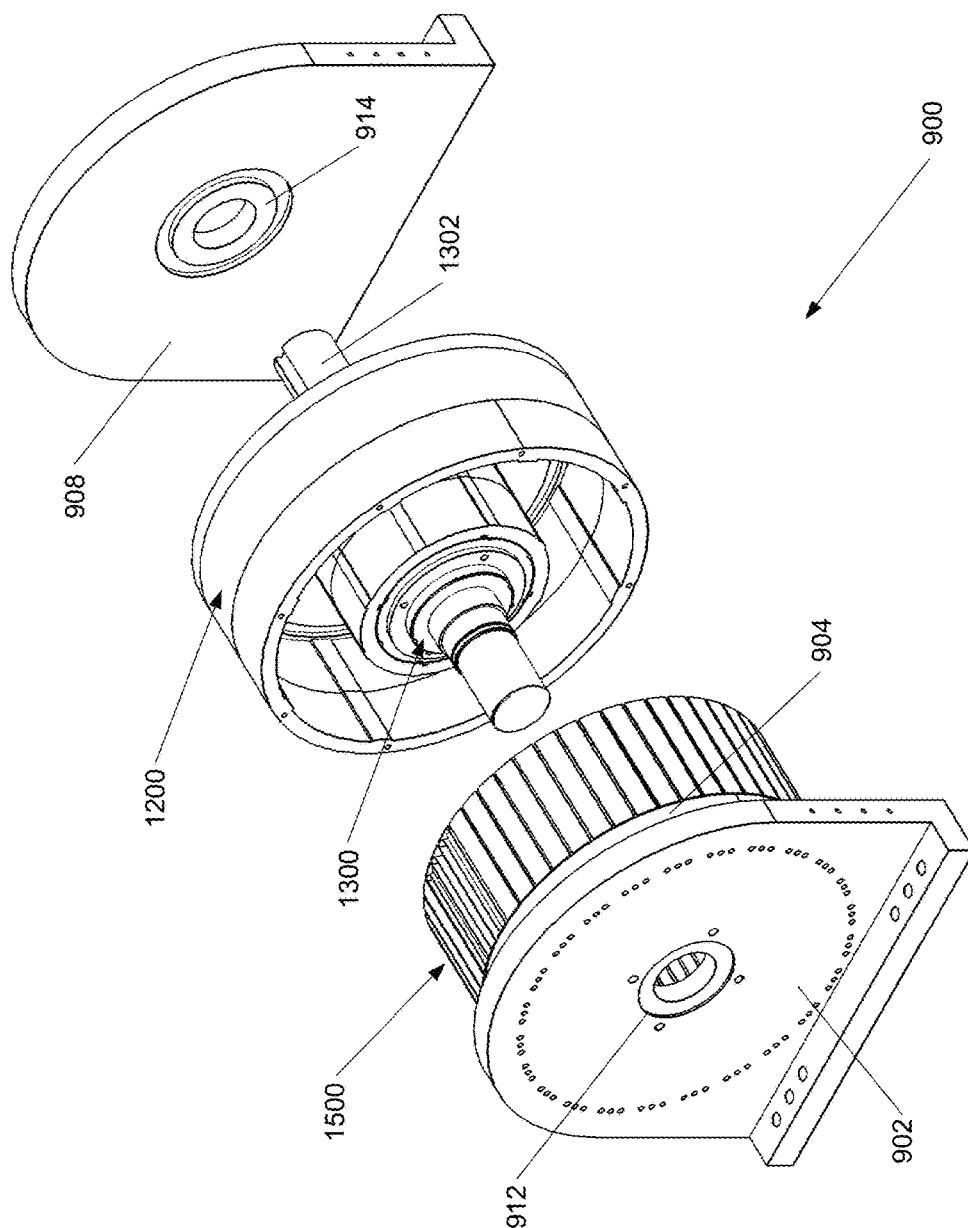


Fig. 10C

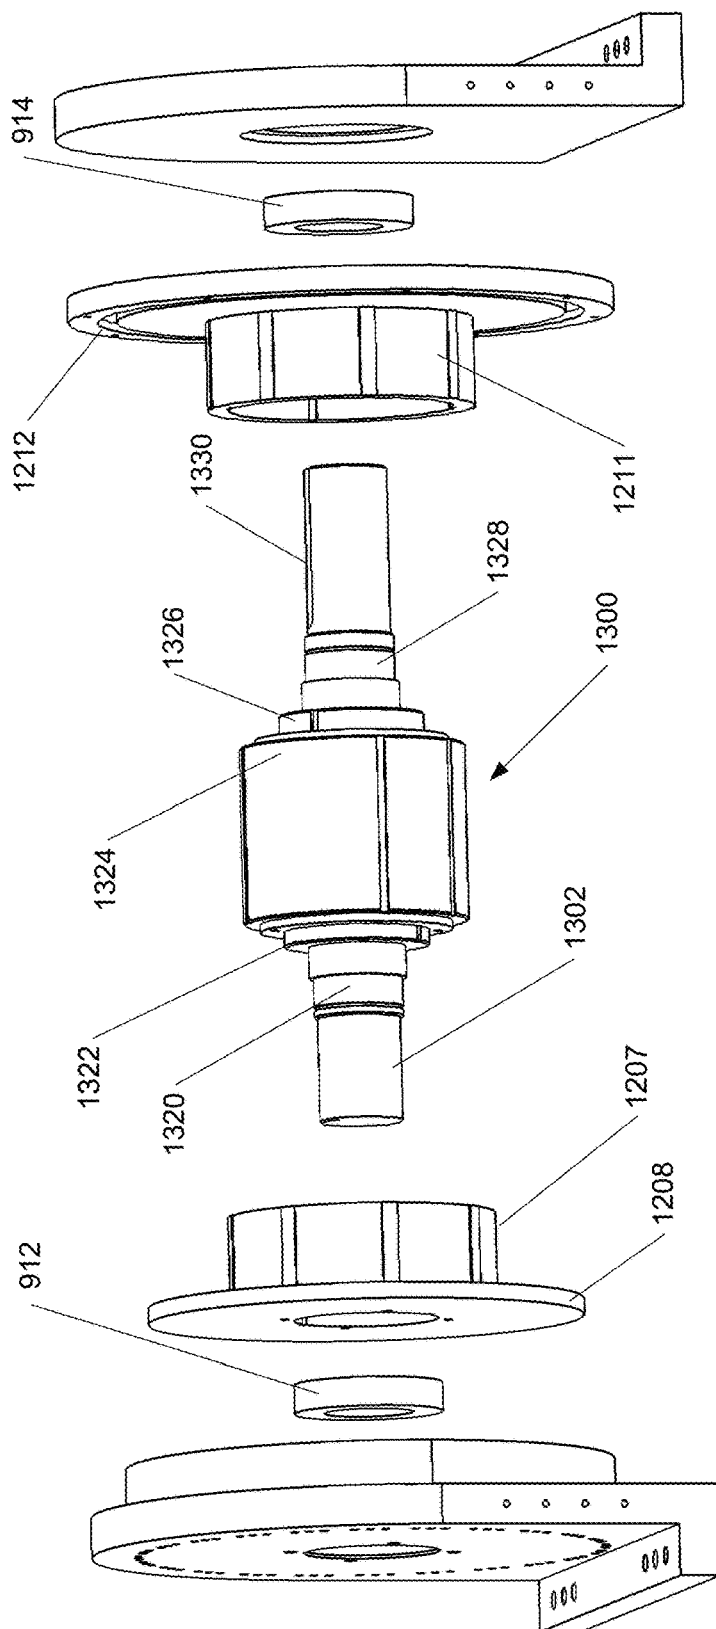


Fig. 10D

1

**MULTI-TUNNEL ELECTRIC
MOTOR/GENERATOR****RELATED APPLICATIONS**

This application is a Continuation of PCT Application number PCT/US2016/039673, entitled "AN IMPROVED MULTI-TUNNEL ELECTRIC MOTOR/GENERATOR," filed on Jun. 27, 2016, and claims priority to U.S. application Ser. No. 15/008,431 entitled "AN IMPROVED MULTI-TUNNEL ELECTRIC MOTOR GENERATOR," filed on Jan. 27, 2016, and U.S. Application No. 62/185,637 entitled "AN IMPROVED ELECTRIC MOTOR/GENERATOR," filed on Jun. 28, 2015, the disclosures of which are incorporated by reference for all purposes.

This application is commonly owned with the following U.S. patent applications: U.S. patent application Ser. No. 14/866,788, entitled "An Improved Brushless Electric Motor/Generator," filed on Sep. 25, 2015; U.S. patent application Ser. No. 14/866,787, entitled "An Improved Brushed Electric Motor/Generator," filed on Sep. 25, 2015; U.S. application Ser. No. 14/608,232, entitled "An Improved Brushless Electric Motor/Generator," filed on Jan. 29, 2015; and U.S. application Ser. No. 13/848,048, entitled "An Improved DC Electric Motor/Generator with Enhanced Permanent Magnetic Flux Densities" filed on Mar. 20, 2013, and PCT application number PCT/US2016/026776, entitled "An Improved Multi-Tunnel Electric Motor/Generator" filed on Apr. 8, 2016, the disclosures of which are hereby incorporated by reference for all purposes.

TECHNICAL FIELD

The invention relates in general to a new and improved electric motor/generator, and in particular to an improved system and method for producing rotary motion from an electro-magnetic motor or generating electrical power from a rotary motion input.

BACKGROUND INFORMATION

Electric motors use electrical energy to produce mechanical energy, very typically through the interaction of magnetic fields and current-carrying conductors. The conversion of electrical energy into mechanical energy by electromagnetic means was first demonstrated by the British scientist Michael Faraday in 1821 and later quantified by the work of Hendrik Lorentz.

A magnetic field is generated when electric charge carriers such as electrons move through space or within an electrical conductor. The geometric shapes of the magnetic flux lines produced by moving charge carriers (electric current) are similar to the shapes of the flux lines in an electrostatic field. Magnetic flux passes through most metals with little or no effect, with certain exceptions, notably iron and nickel. These two metals, and alloys and mixtures containing them, are known as ferromagnetic materials because they may be used to concentrate magnetic lines of flux.

In a traditional electric motor, a central core of tightly wrapped current carrying material creates magnetic poles (known as the rotor) which spins or rotates at high speed between the fixed poles of a magnet (known as the stator) when an electric current is applied. The central core is typically coupled to a shaft which will also rotate with the

2

rotor. The shaft may be used to drive gears and wheels in a rotary machine and/or convert rotational motion into motion in a straight line.

Generators are usually based on the principle of electromagnetic induction, which was discovered by Michael Faraday in 1831. Faraday discovered that when an electrical conducting material (such as copper) is moved through a magnetic field (or vice versa), an electric current will begin to flow through that material. This electromagnetic effect induces voltage or electric current into the moving conductors.

Current power generation devices such as rotary alternator/generators and linear alternators rely on Faraday's discovery to produce power. In fact, rotary generators are essentially very large quantities of wire spinning around the inside of very large magnets. In this situation, the coils of wire are called the armature because they are moving with respect to the stationary magnets (which are called the stators). Typically, the moving component is called the armature and the stationary components are called the stator or stators.

Rotary motors and generators used today produce or utilize a sinusoidal time varying voltage. This waveform is inherent to the operation of these devices.

With conventional motors a pulsed electrical current of sufficient magnitude must be applied to produce a given torque/horsepower. Horsepower output and efficiency then is a function of design, electrical input power plus losses.

With conventional generators, an electrical current is produced when the rotor is rotated. The power generated is a function of flux strength, conductor size, number of pole pieces and speed in RPM.

In motors or generators, some form of energy drives the rotation and/or movement of the rotor. As energy becomes more scarce and expensive, what is needed are more efficient motors and generators to reduce energy consumption, and hence costs.

SUMMARY

In response to this and other problems, there is presented various embodiments disclosed in this application, including methods and systems of increasing flux density by permanent magnet manipulation using multiple magnetic tunnels. Disclosed are various embodiments for a motor/generator comprising: a toroidal magnetic cylinder comprising a first magnetic tunnel segment radially arranged about an axial axis to form a circular path, wherein the first magnetic tunnel segment comprises: a first side magnetic wall having a magnetic pole orientation that points generally towards an interior of the first magnetic tunnel segment; a first opposing side magnetic wall having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment and positioned along the axial axis a predetermined distance from the first side magnetic wall; a first inner magnetic wall generally spanning between the first side magnetic wall and the first opposing side magnetic wall in a generally axial direction and having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment; a first outer magnetic wall generally spanning between the first side magnetic wall and the first opposing side magnetic wall in an axial direction, positioned radially away from the first inner magnetic wall, and having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment; wherein like magnetic poles of magnets forming the first inner magnetic wall and magnets forming the first side

3

magnetic wall are orientated in an opposite direction from the like poles of magnets forming the first outer magnetic wall and magnets forming the first opposing ring magnetic wall; and a coil assembly positioned within the circular path and adapted to move relative to the toroidal magnetic cylinder.

Other embodiments may include the above wherein the toroidal magnetic cylinder further comprises a second magnetic tunnel segment radially arranged about the axial axis positioned adjacent to the first magnetic tunnel segment to form a circular path, wherein the second magnetic tunnel segment comprises: a second side magnetic wall having a magnetic pole orientation that points generally towards an interior of the second magnetic tunnel segment; a second opposing side magnetic wall having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment and positioned along the axial axis the predetermined distance from the second side magnetic wall; a second inner magnetic wall generally spanning between the second side magnetic wall and the second opposing side magnetic wall in a generally axial direction and having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment; a second outer magnetic wall generally spanning between the second side magnetic wall and the second opposing side magnetic wall in a axial direction, positioned radially away from the second inner magnetic wall, and having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment; wherein like magnetic poles of magnets forming the second inner magnetic wall and magnets forming the second side magnetic wall are orientated in an opposite direction from the like poles of magnets forming the second outer magnetic wall and magnets forming the second opposing ring magnetic wall, and the like magnetic poles of magnets forming the second magnetic tunnel segment are orientated in an opposite direction from the like magnet poles of the magnets forming the first magnetic tunnel segment.

Other embodiments may include the above wherein the coil assembly further comprises: a ring-like core; a plurality of teeth radially positioned about the ring-like core and extending from the ring-like core to form a plurality of slots; and a plurality of coil windings wherein each coil winding in the plurality of winding is positioned within a slot within the plurality of slots.

Other embodiments may include the above further comprising a back iron circuit generally surrounding the toroidal magnetic cylinder.

Other embodiments may include the above further comprising longitudinal grooves defined in the back iron circuit for positioning and supporting the magnets forming the first outer magnetic wall and the first inner magnetic wall.

Other embodiments may include the above further comprising a hub coupled to the coil assembly and a shaft coupled to the hub.

Other embodiments may include the above further comprising a hub coupled to the toroidal magnetic cylinder and a shaft coupled to the hub.

Other embodiments may include the above further comprising an exterior circumferential slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.

Other embodiments may include the above further comprising an interior circumferential slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.

4

Other embodiments may include the above further comprising a side circular slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.

Other embodiments may include the above further comprising a means for preventing the magnetic flux forces within the interior of the tunnel from escaping through the slots.

Other embodiments may include the above further comprising: a support ring coupled to the coil assembly and partially extending through the side circular slot; a first end plate coupled to the support ring.

Other embodiments may include the above further comprising: a shaft coupled to the toroidal magnetic cylinder; a second end plate coupled rotatably coupled to the shaft; and a means for connecting the first end plate to the second end plate.

Other embodiments may include the above wherein the first inner magnetic wall, the first outer magnetic wall, the first ring magnetic wall and the first opposing ring magnetic wall may be formed from electromagnets.

Other embodiments may include the above wherein a tangential magnetic force is generated on all sides of individual coils in the plurality of coils when the individual coil is positioned within the first magnetic tunnel segment or second magnetic tunnel segment.

Additionally, there may be a method of producing mechanical rotation, the method characterized by: forming a first area of magnetic concentration within a first interior cavity defined by an first outer magnetic cylinder wall having a first magnetic pole facing the interior cavity, a first inner magnetic cylinder wall having a second magnetic pole facing the interior cavity, a first magnetic side wall having a third magnetic pole facing the interior cavity, and a first opposing magnetic side wall having a fourth magnetic pole facing the interior cavity, wherein the first and third magnetic poles are of opposite polarities from the second and fourth magnetic poles; positioning a coil within the first interior cavity; applying a current in a first direction to the coil to cause the coil to rotate relative to the first interior cavity; coupling a longitudinal shaft to the coil such that as the coil rotates, the longitudinal shaft rotates.

Other embodiments may include the above further comprising: forming a second area of magnetic concentration within a second interior cavity positioned circumferentially adjacent to the first interior cavity defined by an second outer magnetic cylinder wall having a fifth magnetic pole facing the interior cavity, a second inner magnetic cylinder wall having a sixth magnetic pole facing the interior cavity, a second magnetic side wall having a seventh magnetic pole facing the interior cavity, and a second opposing magnetic side wall having a eighth magnetic pole facing the interior cavity, wherein the fifth and seventh magnetic poles are of opposite polarities from the sixth and eighth magnetic poles; applying a current in a first direction to the coil to cause the coil to move to the second interior cavity; applying a current in a second direction to the coil when the coil is within the second interior cavity to move the coil out of the second interior cavity; and coupling a longitudinal shaft to the coil such that as the coil rotates from the first interior cavity to the second interior cavity, the longitudinal shaft rotates.

Additionally, there may be disclosed a method characterized by: forming a first area of magnetic concentration within a first interior cavity defined by an first outer magnetic cylinder wall having a first magnetic pole facing the interior cavity, a first inner magnetic cylinder wall having a second magnetic pole facing the interior cavity, a first

5

magnetic side wall having a third magnetic pole facing the interior cavity, and a first opposing magnetic side wall having a fourth magnetic pole facing the interior cavity, wherein the first and third magnetic poles are of opposite polarities from the second and fourth magnetic poles; rotating a coil within the first interior cavity; and extracting from the coil a current having a first direction as the coil moves through the first interior cavity.

Other embodiments may include the above further comprising: forming a second area of magnetic concentration within a second interior cavity defined by an second outer magnetic cylinder wall having a fifth magnetic pole facing the interior cavity, a second inner magnetic cylinder wall having a sixth magnetic pole facing the interior cavity, a second magnetic side wall having a seventh magnetic pole facing the interior cavity, and a second opposing magnetic side wall having an eighth magnetic pole facing the interior cavity, wherein the fifth and seventh magnetic poles are of opposite polarities from the sixth and eighth magnetic poles, wherein the first through fourth magnetic poles are of an opposite polarity than the fifth through eighth magnetic poles; rotating the coil within the second interior cavity; and extracting from the coil a current having a second direction when the coil moves through the second interior cavity.

These and other features, and advantages, will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings.

It is important to note the drawings are not intended to represent the only aspects of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded view of one embodiment of a motor/generator component according to certain aspects of the present disclosure.

FIG. 2 is a detailed isometric view of a component of the motor/generator component illustrated in FIG. 1.

FIG. 3 is an exploded view of the component of FIG. 2.

FIG. 4A is an isometric view of a coil assembly illustrating a central iron core and a plurality of teeth extending from the iron core where a portion of the teeth have been removed for clarity.

FIG. 4B is a detailed perspective view of a single tooth of the plurality of teeth of FIG. 4A.

FIG. 4C is a detailed perspective view of an alternative embodiment for the single tooth of the plurality of teeth of FIG. 4A.

FIG. 4D is an isometric view of the coil assembly of FIG. 4A coupled to a plurality of coil windings.

FIG. 4E is an isometric view of the rotor/stator of FIG. 4A coupled to a plurality of coil windings showing all of the rotor/stator teeth.

FIG. 5A illustrates a plurality of magnets forming one embodiment of a toroidal magnetic tunnel comprising eight magnetic cylinder segments.

FIG. 5B is a detailed perspective view illustrating one embodiment of a magnetic cylinder segment.

FIG. 5C is a detailed isometric view of one embodiment of a magnetic cylinder segment with a portion of a rotor/stator portion positioned therein illustrating the direction of the flux forces generated from the magnets comprising the magnetic cylinder segments.

FIG. 5D is a detailed isometric view of the embodiment illustrated in FIG. 5C and a coil winding positioned therein illustrating the direction of the current in the coil winding.

FIG. 5E is a detailed isometric view of one embodiment of a magnetic cylinder segment of FIG. 5D illustrating the

6

direction of force generated by the interaction of the flux forces generated by the magnets and the current in the windings.

FIG. 6A is a perspective view of four magnetic cylinder segments arranged around a longitudinal axis having similar magnetic pole orientations.

FIG. 6B is a detailed isometric view of one embodiment of a magnetic cylinder segment illustrating the magnets forming the segment have an opposite magnetic polarity to the magnets of the segment illustrated in FIGS. 5C to 5E.

FIG. 6C is an isometric view of the four magnetic cylinder segments with four additional magnetic cylinder segments where the four additional magnetic cylinder segments have a magnetic pole orientation opposite to the first four magnetic cylinder segments.

FIG. 7A illustrates the magnetic cylinder of FIG. 6C coupled to a back iron circuit with a portion of the side back iron circuit removed for clarity.

FIG. 7B illustrates the magnetic cylinder of FIG. 6C coupled to a complete back iron circuit.

FIG. 8 illustrates an exemplary switch circuit which may be used with certain embodiments of the present invention.

FIG. 9A illustrates an alternative magnetic cylinder coupled to a back iron circuit.

FIG. 9B is an assembled view of the alternative magnetic cylinder.

FIG. 9C is an exploded view of the alternative magnetic cylinder of FIG. 9B.

FIG. 10A is an assembled view of a motor/generator incorporating the alternative magnetic cylinder.

FIG. 10B is an exploded view of a motor/generator incorporating the alternative magnetic cylinder.

FIG. 10C is an exploded view of a motor/generator incorporating the alternative magnetic cylinder with certain components removed for clarity.

FIG. 10D is an exploded view of a motor/generator incorporating the alternative magnetic cylinder with certain components removed for clarity.

DETAILED DESCRIPTION

Specific examples of components, signals, messages, protocols, and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to limit the invention from that described in the claims. Well-known elements are presented without a detailed description in order not to obscure the present invention in unnecessary detail. For the most part, details unnecessary to obtain a complete understanding of the present invention have been omitted inasmuch as such details are within the skills of persons of ordinary skill in the relevant art. Details regarding conventional control circuitry, power supplies, or circuitry used to power certain components or elements described herein are omitted, as such details are within the skills of persons of ordinary skill in the relevant art.

When directions, such as upper, lower, top, bottom, clockwise, or counter-clockwise are discussed in this disclosure, such directions are meant to only supply reference directions for the illustrated figures and for relative orientation of components in the figures. The directions should not be read to imply actual directions used in any resulting invention or actual use. Under no circumstances, should such directions be read to limit or impart any meaning into the claims except for relative positioning.

FIG. 1 is an exploded perspective view of a motor/generator component 100 illustrating a first portion of a back

7

iron circuit **202**, a second portion of a back iron circuit **204**, a center hub **300**, and a magnetic disc assembly **400**. The first portion back iron circuit **202** comprises a first cylindrical wall **206** made of back iron material. The first cylinder wall **206** may be coupled to a flat side wall **208** which is also made of back iron material. For purposes of this application the term “back iron” may refer to iron or a soft magnetic material, such as any ferrous compound or alloy, such as stainless steel, any nickel or cobalt alloy, or any laminated metal comprising laminated sheets of such material.

The second portion of the back iron circuit **204** similarly comprises a second cylindrical wall **210** coupled to a flat side wall **212**. When assembled, the first portion of the back iron circuit **202** and the second portion of the back iron circuit **204** physically surrounds the center hub **300** and the magnetic disc assembly **400**. In other embodiments, the space between the cylindrical walls **206** and **210** define a slot **410** (see FIG. 7B) defined therein to allow the passage of control wires and/or electrical conductors. In yet other embodiments, there may be a slot or gap (not shown) between the cylindrical walls **206** and **210** and the flat side walls **208** and **212**, respectively. In certain embodiments, the slot allows for the passage of control wires and/or electrical conductors.

In certain embodiments, the hub **300** comprises an inner hub **302** for coupling to a mechanical load transferring device, such as a shaft (not shown). The hub **300** positions and structurally supports the magnetic disc assembly **400** about the shaft (not shown). In this embodiment, a plurality of radial arms **304** couple the inner hub **302** to an outer hub **306**. In certain embodiments, the outer hub **306** also comprises a portion of the back iron circuit for the magnetic disc assembly **400**.

FIG. 2 is a detailed isometric view of the magnetic disc assembly **400**. FIG. 3 is an exploded view of the magnetic disc assembly **400**. In the embodiment illustrated in FIGS. 2 and 3, with respect to a longitudinal axis **401**, there is a top or first side or axial ring of magnets **402**. Similarly there is a bottom or second side or axial ring of magnets **404**. An outer cylindrical wall or longitudinal ring of magnets **406** is longitudinally positioned between the first axial ring **402** and the second axial ring of magnets **404**. An inner cylindrical wall or longitudinal ring of magnets **408** is also longitudinally positioned between the first axial ring **402** and the second axial ring of magnets **408** and laterally positioned within the outer longitudinal ring of magnets **406**. When assembled, the magnets forming the axial rings **402-404** and longitudinal rings **408-406** form a toroidal magnetic cylinder, such as illustrated in FIG. 5A.

In certain embodiments, the magnets forming the axial rings **402-404** and longitudinal rings **408-406** discussed herein may be made of out any suitable magnetic material, such as: neodymium, Alnico alloys, ceramic permanent magnets, or electromagnets. The exact number of magnets or electromagnets will be dependent on the required magnetic field strength or mechanical configuration. The illustrated embodiment is only one way of arranging the magnets, based on certain commercially available magnets. Other arrangements are possible, especially if magnets are manufactured for this specific purpose.

A coil assembly **500** is laterally positioned between the outer longitudinal ring **406** and the inner longitudinal ring **408** and is longitudinally positioned between the first axial ring **402** and the second axial ring **404**. In certain embodiments, the coil assembly **500** may be a stator. In yet other embodiments, the coil assembly **500** may be a rotor.

8

Turning now to FIG. 4A, there is a partial isometric view of a coil assembly support **502**, which in one embodiment, may be a portion of a stator used in conjunction with a rotor formed by the magnetic axial rings **402-404** and magnetic longitudinal cylindrical walls **406-408** and the back iron circuit portions **202** and **204** discussed above. In certain embodiments, the coil assembly support **502** comprises a cylindrical or ring core **504** coupled to a plurality of teeth **506** radially spaced about the ring core. For purposes of clarity, FIG. 4A shows a portion of teeth **506** removed so that the ring core **504** is visible.

In certain embodiments, the ring core **504** may be made out of iron or back iron materials so that it will act as a magnetic flux force concentrator. However, other core materials maybe used when design considerations such as mechanical strength, reduction of eddy currents, cooling channels, etc. are considered. As discussed above, back iron materials may be iron, an iron alloy, laminated steel iron or other soft magnet materials. In some embodiments, the ring core **504** may be hollow or have passages defined therein to allow liquid or air cooling.

One embodiment of an individual tooth **506a** and a small portion of the ring core **504** are illustrated in FIG. 4B. The tooth **506a** may be made from a material similar to the material forming the core **504**, for example, iron or laminated steel. In the illustrated embodiment, each tooth **506a** extends from the ring core **504** in radial (e.g., horizontal) and longitudinal (e.g., vertical) directions. Thus, each tooth **506a** comprises an outer portion **510** extending radially away from the longitudinal axis **401** (FIG. 3), an inner portion **512** extending radially toward the longitudinal axis **401**, a top portion **514** extending in one longitudinal direction, and a bottom portion **516** extending in the opposing vertical or longitudinal direction. The illustrated portion of the ring core **504** is coupled to and supports the individual tooth **506a**.

In certain embodiments, an exterior fin **520** couples to an exterior edge of the outer vertical portion **510** and extends outward from the vertical portion **510** in both circumferential (or tangential) directions with respect to the longitudinal axis **401**. Similarly, an interior fin **522** couples to an interior edge of the inner portion **512** and extends outward from the portion **512** in both circumferential (or tangential) directions. As used in this disclosure, the term “circumferential direction” means the tangential or rotational direction about an axis, such as axis **401** (See FIG. 4A).

An alternative embodiment of an individual tooth **506'a** and a small portion of the ring core **504** are illustrated in FIG. 4C. The tooth **506'a** is similar to the tooth **506a** described above in reference to FIG. 4B except that the tooth **506'a** also has horizontal fins extending from the top portion **514** and the lower portion **516**. Specifically, a first or top horizontal fin **518** extends in both horizontal circumferential directions from an edge of the top horizontal portion **514**. Similarly, a second or bottom horizontal fin **519** extends in both horizontal circumferential directions from an edge of the bottom horizontal portion **516**. In other words, the top horizontal fin **518** joins the exterior fin **520** to the interior fin **522**. Similarly, the bottom horizontal fin **519** joins the exterior fin **520** to the interior fin **522**. From a structural perspective, the thickness of the fins **518** and **519** maybe thicker closer to the joint with the respective horizontal members **514** and **516** and tapers as the fins extend away from the joints.

Adjacent teeth **506** or **506'** supported by the core ring **504** form radial slots **524** within the coil assembly support structure **502**, as illustrated in FIG. 4A. FIG. 4D (which

omits a portion of the teeth **506**) illustrates individual coils or coil windings **526** positioned radially about the ring core **504** and within the slots **524** formed by the teeth **506** or **506'**. FIG. 4E illustrates a complete coil assembly **500** showing all of the individual teeth **506** and individual coil windings **526** positioned within the individual slots **524**.

Each individual coil **526** in the coil assembly **500** may be made from a conductive material, such as copper (or a similar alloy) wire and may be constructed using conventional winding techniques known in the art. In certain embodiments, concentrated windings may be used. In certain embodiments, the individual coils **526** may be essentially cylindrical or rectangular in shape being wound around the ring core **504** having a center opening sized to allow the individual coil **526** to be secured to the core **504**.

By positioning the individual coils **526** within the slots **524** defined by the teeth **506** or **506'**, the coils are surrounded by a more substantial heat sink capabilities of the teeth which, in certain embodiments, can be can incorporate cooling passages directly into the material forming the teeth. This allows much higher current densities than conventional motor geometries. Additionally, positioning the plurality of coils **526** within the slots **524** and between teeth **506** reduces the air gap between the coils. By reducing the air gap, the coil assembly **500** can contribute to the overall torque produced by the motor or generator. In certain embodiments, the lateral fins **518** and **519** (FIG. 4C), the circumferential fins **520** and **522** (FIG. 4B or 4C) of the teeth **506a** or **506'a** of the coil assembly reduce the air gap between the structure of the coil to allow flux forces to flow from one fin to an adjacent fin when the coils are energized and the coil assembly **500** begins to move relative to the magnetic tunnel. Thus, all portions of the coil support assembly **502** contribute to the overall torque developed by the system.

The number of individual coils **526** can be any number that will physically fit within the desired volume and of a conductor length and size that produces the desired electrical or mechanical output as known in the art. In yet other embodiments, the coils **526** may be essentially one continuous coil, similar to a Gramme Ring as is known in the art.

FIG. 5A is a perspective view of a toroidal magnetic cylinder **430** forming a circular or ring-like magnetic tunnel positioned about the longitudinal axis **401**. As described previously, with respect to the longitudinal axis **401**, the toroidal magnetic cylinder **430** comprises the top axial ring or side wall magnets **402**. Similarly there is a second or bottom axial ring or side wall magnets **404**. An outer cylindrical wall or longitudinal ring of magnets **406** is positioned longitudinally between the first axial ring **402** and the second axial ring of magnets **404**. Depending on the embodiment, the outer longitudinal ring of magnets **406** may define an axial slot **410** to accommodate a support structure, a cooling mechanism, and/or wires and conductors. An inner cylindrical wall or longitudinal ring of magnets **408** is also longitudinally positioned between the first axial ring **402** and the second axial ring of magnets **408** and axially positioned within the outer longitudinal ring of magnets **406**.

In other embodiments, the inner longitudinal ring of magnets **408** may include an axial slot (similar to slot **410**, but not shown). In yet further embodiments, the first axial ring **402** or the second axial ring of magnets **404** may include a side circular slot (not shown). Such slots are designed to accommodate a support structure, a cooling mechanism and/or wires or conductors. One advantage of a slot defined within the inner longitudinal ring of magnets **408** (as opposed to the outer longitudinal ring of magnets **406**) is that the inner longitudinal ring of magnets **408**

produces less torque than the outer ring of magnets **406**. Thus, by using the full width of the outer longitudinal ring of magnets **408**, greater torque can be produced.

In the embodiment illustrated in FIG. 5A, the toroidal magnetic cylinder **430** comprises eight toroidal magnetic cylinder segments (or magnetic tunnel segments). In other embodiments, there may be two, four, six, ten, twelve segments or more. The number of segments will depend on the particular design and performance characteristics for particular application.

FIG. 5B is a perspective view of a single toroidal magnetic cylinder segment **450** (or a magnetic tunnel segment) which defines a magnetic tunnel **458** or portion of a circular path. As illustrated, the toroidal magnetic cylinder segment **450** has an outer magnetic wall **452** (which is a portion of the outer cylinder wall **406**) and an inner magnetic wall **454** (which is a portion of the inner magnetic cylinder wall **408**). In addition to the partial cylindrical magnetic walls **452** and **454**, there are also be magnetic axial, side or lateral walls **460** and **462** which in this illustrated embodiment may be made of a wedge shape members or magnets. Axial wall **460** may be a portion of the first side or ring wall **402** and axial wall **462** may be a portion of the second side or ring wall **404** or vice versa.

In the illustrated embodiment, there may be slots between the walls, such as slot **456** between the wall **454** and the wall **460**. As discussed above, in certain embodiments, there may also be slots within the walls, such as slot **410** which is defined within the wall **452**. The individual magnets in the magnetic walls **452**, **454**, **460**, and **462** all have their magnetic poles orientated towards or away from an interior of the tunnel **458** of the toroidal magnetic cylinder segment **450** to form a "closed" magnetic tunnel segment. In other words, the magnetic poles of the magnets forming the outer wall **452** and the inner wall **454** have their magnetic poles orientated to radially point towards the longitudinal axis **401** (FIG. 5A). In contrast, the magnetic poles of the magnets forming the first axial wall **460** and the second axial wall **462** have their magnetic poles orientated parallel with the longitudinal axis **401**.

The term "closed magnetic tunnel" as used in this disclosure refers to using a arrangement of the magnets forming the cylinder segment **450** that that "forces" or "bends" the flux forces from one side of the tunnel to the other in a circumferential direction without letting most of the magnetic flux forces escape through a slot or other opening. Thus, the slot widths are limited to keep flux forces from exiting through the slots. In other embodiments, additional magnets may be inserted into the slots (or in proximity to the slots) to keep most of the flux forces channeled to a predetermined or a circumferential direction.

FIG. 5C is an isometric view of the toroidal cylinder segment **450** having a portion of the coil assembly **500** positioned within the interior of the segment. The magnetic configuration illustrated in FIG. 5C may be called a "SSNN" configuration because two adjacent magnet faces have their south poles facing inward and the other two adjacent magnetic faces have their north poles facing inward. In other words, the magnets forming the top axial wall **460** and the outer longitudinal wall **452** have their south magnetic poles facing towards the interior of the tunnel **458**. (For a matter of drawing interpretation convenience, an "S" is placed on the edge of the axial wall **460** and longitudinal wall **452** to indicate that their south interior poles are facing inward. Thus, the "S" positioned on the edge or side does not represent an actual magnetic pole, but an indicator of the magnetic polarity for the respective interior face.) In con-

11

trast, the magnets forming the inner longitudinal wall **454** and the bottom axial wall **462** have their north interior magnetic poles facing towards the interior of the tunnel **458** (Thus, an "N" is placed on the edge of the axial wall **462** and longitudinal **454** to indicate that their north interior poles are facing inward. Again, the "N" positioned on the edge of the axial wall does not represent an actual magnetic pole.) When the coil assembly is positioned within the toroidal cylinder segment **450** as illustrated, the flux lines tend to flow from the north poles of the magnetic walls directly across the coil assembly to the south poles on the opposing side of the magnetic walls.

To illustrate the direction of magnetic forces, arrows will also be used. Thus, the top axial wall **460** is labeled with an "S" on its edge and an arrow **480** pointing towards the center of the toroidal segment **450** to represent the direction of the flux forces generated from the south interior poles of the magnet(s) forming the top axial wall **460**. Similarly, the outer longitudinal wall **452** is labeled with an "S" on its edge and an arrow **482** pointing towards the center of the toroidal segment **450** to represent the direction of the flux forces generated from the south interior poles of the magnet(s) forming the outer longitudinal wall **452**. In contrast, the bottom axial wall **462** is labeled with an "N" on its edge and an arrow **484** pointing towards the center of the toroidal segment **450** to represent the direction of the flux forces generated from the north interior poles of the magnet(s) forming the bottom axial wall **462**. The inner longitudinal wall **454** is labeled with an "N" on its edge and an arrow **486** pointing towards the center of the toroidal segment **450** to represent the direction of the flux forces generated from the north interior poles of the magnet(s) forming the inner longitudinal wall **454**.

FIG. 5D is an isometric view of the toroidal cylinder segment **450** but with a coil **526a** positioned around the portion of the coil assembly **500**. When the motor/generator **100** is in motor mode, current from an external source (not shown) is applied to the coils, such as coil **526a**. In the illustrated embodiment, the current flows in a counterclockwise manner as illustrated by the arrow **488** which illustrates the current in the coil **526a** flowing in an upwards direction. The current then flows in a right to left manner as illustrated by the arrow **490** when the current is in the upper portion of the coil **526a**. Similarly, the current flows in a downwardly direction as illustrated by arrow **492** when the current is in a vertical leg of the coil **526a**. Finally, the current flows in a left to right manner when the current is in the lower portion of the coil **526a** as illustrated by the arrow **494**.

FIG. 5E is an isometric view of the cylinder segment **450** with the coil **526a** positioned around the portion of the ring core **504** of the coil assembly **500** and the current flowing through the coil as explained above in reference to FIG. 5D. When the magnets forming the outer cylindrical wall **452** generate a flux force in the direction of the arrow **482** and the current in the coil **526a** flows in an upward direction relative to the illustration, a magnetic force will be generated in the direction of the arrow **602** according to the right hand rule of magnetic force. Simultaneously, the magnets forming the lateral or top wall **460** generate a flux in the direction of the arrow **480** and the current in the coil **526a** flows in a right-to-left direction relative to the illustration, a magnetic force will be generated in the direction of the arrow **604**. Additionally, the magnets forming the longitudinal or inner cylindrical wall **454** generate a flux force in the direction of the arrow **486** and the current in the coil **526a** flows in a downward direction relative to the illustration, a magnetic force will be generated in the direction of the arrow **606**.

12

Finally, the magnets forming the lateral or bottom wall **462** generate a flux force in the direction of the arrow **484** and the current in the coil **526a** flows in a left-to-right direction relative to the illustration, a magnetic force will be generated in the direction of the arrow **608**.

Note that all the arrows **602**, **604**, **606**, and **608** are in the same direction (i.e., the tangential or circumferential direction relative to the axis **401**). Thus, force generated by each portion of the coil **526a** will be in the same direction. In other words, the entire coil **526a** is used to generate the magnetic forces in the same direction which will tend to move the coil **526a** relative to the cylinder segment **450**.

In conventional configurations, the opposing poles of the magnets are usually aligned longitudinally. Thus, the magnetic flux lines will "hug" or closely follow the surface of the magnets. So, when using conventional power generating/utilization equipment, the clearances must usually be extremely tight in order to be able to act on these lines of force. By aligning like magnetic poles radially or perpendicular to the coil assembly **500** the magnetic flux forces flow from the surface of the magnets across the coil assembly. This configuration allows for greater tolerances between coils and magnetic surfaces.

One of the advantages of this configuration over conventional motors is that the end turns (in this case the radial section of the coils) are part of the "active section" or force generation section of the motor/generator. In conventional motors, usually only the axial length of the copper conductor is the section that produces power. In conventional motors, the end turns are a penalty, adding weight and losses, but not producing power because the end region fields are not effectively linking the end windings. However, as explained above, the entire coil winding is effectively producing torque due to the side wall or axial magnets which are axially magnetized. Therefore, essentially the entire conductor of the coils is active producing a greater force.

The windings of each coil **526** are generally configured such that they remain transverse or perpendicular to the direction of the relative movement of the magnets comprising the coil assembly **500** and parallel with the longitudinal axis **401**. In other words, the coil windings are positioned such that their sides are parallel with the longitudinal axis and their ends are radially perpendicular to the longitudinal axis. The windings are also transverse with respect to the magnetic flux produced by the individual magnets of the rotor at their interior face as described above. Thus, the entire coil winding or windings (including end turns) may be used to generate movement (in motor mode) or voltage (in generator mode).

FIG. 6A illustrates four toroidal magnetic cylinder segments **450a**, **450b**, **450c** and **450d** arranged circumferentially around a common center or longitudinal axis **401**. This arrangement leaves four open spaces **610a**, **610b**, **610c**, and **610d** between the respective cylinder segments. Inserting or positioning four additional toroidal magnetic cylinder segments **420a-420d** into the spaces **610a-610d** results in a complete toroidal magnetic cylinder **430** as illustrated in FIG. 6C. Thus, FIG. 6C illustrates the complete toroidal magnetic cylinder **430** formed from combining the four toroidal magnetic cylinder segments **450a-450d** with the toroidal magnetic cylinder segments **420a-420d** in an alternating arrangement around the longitudinal axis **401**.

The magnets creating the toroidal magnetic cylinder segments **450a-450d** are orientated in a specific geometric arrangement as discussed above in reference to FIG. 5E. In other words, the magnets forming the top magnetic walls **460** and outer cylinder wall **452** have their south poles facing

13

inward towards the interior of the cylinder segment. The magnets forming the magnetic bottom wall **462** and the interior cylindrical wall **460** have their north poles facing inward towards the interior of the magnetic cylinder segment. In contrast, the adjacent toroidal magnetic cylinder segments such as the magnetic cylinder segment **420a** have their magnetic poles orientated in the opposite direction as illustrated in FIG. 6C.

FIG. 6B illustrates an adjacent toroidal magnetic cylinder segment **420**, which could be the toroidal magnetic cylinder segment **420a** to **420d**. The magnetic cylinder segment **420** is similar to the magnetic cylinder segment **450** discussed above except that the magnetic pole orientation is reversed. In other words, the magnets forming the magnetic walls **460a** and **452a** have their north poles facing inward towards the interior of the cylinder segment. (As before, “N” is placed on the side of the axial wall **460a** and longitudinal **452a** to indicate that their north poles are facing inward.) The magnets forming the magnetic walls **462a** and **454a** have their south poles facing inward towards the interior of the magnetic cylinder segment. (Similarly, an “S” is placed on the side of the axial wall **462a** and longitudinal **454a** to indicate that their south poles are facing inward.) Thus, the toroidal magnetic cylinder segments **420a-420d** have an opposite magnetic orientation relative to the toroidal magnetic cylinder segments **450a-450d**.

When the cylinder segments **420a-420d** are energized, the current running through the coil windings positioned within the toroidal magnetic cylinder segments **420a-420d** also runs in an opposite direction than the current running through the coil windings positioned within the magnetic cylinder segments **450a-450d** so that the direction of the generated magnetic force or torque is the same throughout the entire magnetic cylinder **430**.

In FIG. 6B, some of magnetic walls are labeled with an “S” representing a facing “South” pole of a magnet wall—as opposed to the magnetic walls labeled with an “N” representing a facing “North” pole of the magnetic wall. Thus, the letters “N” and “S” are superimposed on the exterior faces of the magnetic walls to indicate the direction of magnetic pole polarity of the magnets forming the respective wall. As discussed above, although an eight segment toroidal magnetic cylinder **430** is illustrated in FIG. 6B, in other embodiments, two, three, four, six, ten, etc. partial toroidal magnetic cylinders may be used. The number of partial toroidal magnetic cylinders selected for any given application may be based on engineering design parameters and the particular performance characteristics for an individual application. The scope of this invention specifically includes and contemplates multiple partial toroidal magnetic cylinders having an opposite polarity to the adjacent partial toroidal magnetic cylinders. For simplicity and illustrative purposes, an eight segment toroidal magnetic cylinder is described herein. However, this design choice is in no way meant to limit the choice or number of tunnels for any multi-tunnel toroidal magnetic cylinder.

In certain embodiments, the partial toroidal magnetic cylinders **450a-450d** and **420a-420d** may be sized to allow radial gaps **422** to form between the partial toroidal magnetic cylinders when the partial toroidal magnetic cylinders are assembled into the complete cylinder **430** as illustrated in FIG. 6B.

FIG. 7A illustrates an eight tunnel toroidal magnetic cylinder **430** of FIG. 6B with a portion of the back iron circuit **200** enclosing the magnetic cylinder **430**. FIG. 7B illustrates the eight tunnel toroidal magnetic cylinder **430** fully enclosed by the back iron circuit **200**. As discussed

14

above, in other embodiments, there may be a slot **410** between the back iron components to allow for the passage of control wires and conductors (not shown).

As discussed above, in the illustrative embodiment, the hub **300** comprises an inner hub **302** for coupling to a mechanical load transferring device, such as a rod (not shown). A plurality of radial arms or spokes **304** structurally connect the inner hub **302** to an outer hub **306**. In certain embodiments, the outer hub **306** also comprises a portion of the back iron circuit and thus may be formed from back iron material.

In certain embodiments, the back iron circuit may be used as part of the magnetic flux path. The back iron material channels the magnetic flux produced by the magnetic toroidal cylinder **430** through the back iron material (as opposed to air) to reduce the reluctance of the magnetic circuit. In certain embodiments, therefore, the amount or thickness of the magnets forming the toroidal magnetic cylinder (if permanent magnets are used) may be reduced when using the appropriately designed back iron circuit.

In certain embodiments, the back iron circuit may include a “top” side or axial wall **208** and a “bottom” side or axial wall **210** of back iron material. The circuit may also include the circumferential rings **202** and **204** which may or may not couple to the axial walls **208** and **210**, respectively. Thus, in this embodiment, the entire back iron circuit includes the outer cylinder wall **306** of the hub **300**, the circumferential rings **202** and **204**, and the axial walls **208** and **210** as illustrated in FIGS. 7A and 7B. The back iron circuit combined with the toroidal magnetic cylinder **430** may form a rotor (or a stator depending on the motor/generator configuration).

In order maintain the generated torque and/or power the individual coils **526** in the coil assembly may be selectively energized or activated by way of a switching or controller (not shown). The individual coils **526** in the coil assembly **500** may be electrically, physically, and communicatively coupled to switching or controller which selectively and operatively provides electrical current to the individual coils in a conventional manner.

For instance, the controller may cause current to flow within the individual coil as indicated in FIGS. 5D and 5E when the individual coil is within a magnetic tunnel segment with a NNSS magnetic pole configuration as illustrated in FIGS. 5D and 5E. On the other hand when the same individual coil moves into an adjacent magnetic tunnel segment with a SSNN magnetic pole configuration, the controller causes the current within the individual coil to flow in a direction opposite to that shown in FIGS. 5D and 5E so that the generated magnetic force is in the same direction as illustrated by the arrows **602**, **604**, **606**, and **608** of FIG. 5E.

Turning back to FIGS. 4C and 5E, the individual coils **526** may use toroidal winding without end windings and in some embodiments be connected to each other in series. In other embodiments, a three phase winding may be used where adjacent coils are connected together to form a branch of each phase. For instance, two adjacent coils may be phase A coils, the next two adjacent coils may be phase B coils, and the next two adjacent coils may be phase C coils. This three phase configuration would then repeat for all individual coils **526** within the coil assembly. In one embodiment, there are eight (8) pairs of adjacent phase A coils for a total of 16 phase A coils. Similarly, there are eight (8) pairs of adjacent phase B coils for a total of 16 phase B coils, and there are

15

eight (8) pairs of adjacent phase C coils for a total of 16 phase C coils. Thus, in such an embodiment, there are 48 individual coils.

When the coils are energized, the three phase winding can produce a rotating magnetic field in the air gap around the coil assembly. The rotating magnetic field interacts with the magnetic field generated by the toroidal magnetic tunnel producing torque and relative movement between the coil assembly and the toroidal magnetic tunnel.

In such embodiments, the individual coils **526** may be connected to a brushless motor controller (not shown) to be activated in a manner known in the art. For each phase, the controller can apply forward current, reverse current, or no current. In operation, the controller applies current to the phases in a sequence that continuously imparts torque to turn the magnetic toroidal tunnel in a desired direction (relative to the coil assembly) in motor mode. In certain embodiments, the controller can decode the rotor position from signals from position sensors or can infer the rotor position based on current drawn by each phase.

In yet other embodiments, a brushed motor/generator may be used. In such embodiments, one or more commutators (not shown) may be used and positioned, for instance, within the hub **300**. In certain embodiments, the number of brushes used may equal the number of toroidal magnetic segments used in the design of the particular motor/generator. For instance, if four toroidal magnetic segments are used, then four brushes may be used. The individual coils **526** in the coil assembly may be connected in series having toroidal wound windings. In a brushed design in motor mode, a simplified switching circuit **800** such as illustrated in FIG. **8** is all that is necessary to switch the current direction as the coils enter and exit the respective toroidal magnetic segment. As illustrated in FIG. **8**, a power source **802** is electrically coupled to a brushed motor **804** via four pairs of transistors **806a-806d** and diodes **808a-808d** as is known in the art to switch the current of the four toroidal magnetic segments.

A Motor/Generator Embodiment

FIG. **9A** illustrates a magnetic disc assembly **1400** (similar to the magnetic disc assembly **400** of FIGS. **1** and **2**) enclosed by a back iron circuit **1200**. The back iron circuit **1200** is similar to the back iron circuit **200** discussed above. As opposed to the embodiment discussed above in reference to FIGS. **7A** and **7B** which has a circumferential slot **410** defined in between the first cylindrical wall **206** and the second cylinder wall **210** of the back iron circuit **200**, the toroidal magnetic cylinder **1400** has a side slot **1410** defined between a first side or top wall **1208** and a first cylinder wall **1206** of the back iron circuit **1200**. The side slot **1410** may be used to allow for a structural side support (e.g., an extension ring) in addition to the passage of control wires and conductors. For brevity and clarity, a description of those parts and components which are identical or similar to those described in connection with the embodiment illustrated in the above figures will not be repeated here. Reference should be made to the foregoing paragraphs with the following description to arrive at a complete understanding of alternative embodiments.

FIG. **9B** illustrates the magnetic disc assembly **1400** with the back iron circuit **1200** removed for clarity. Although eight segments are illustrated in FIG. **9B**, the toroidal magnetic cylinder **1400** may be made of any number of segments—as explained above in reference to the toroidal magnetic cylinder **430**.

FIG. **9C** is an exploded isometric view of the back iron circuit **1200** and the magnets forming a toroidal magnetic

16

cylinder **1430** (which is similar to the toroidal magnetic cylinder **430** discussed above). In this embodiment, the back iron circuit **1200** comprises a first portion **1202** and a second portion **1204**. The first portion of the back iron circuit **1200** comprises the side or top wall **1208**, a first circumferential outer wall or ring **1206**, and a first interior wall or ring **1207**. The second portion **1204** of the back iron circuit **1200** comprises the side or bottom wall **1212**, the second circumferential outer wall or ring **1210**, and a second interior wall or ring **1211**.

The toroidal magnetic cylinder **1430** is formed by a first axial ring or side wall **1402**, a second axial ring or side wall **1404**, an outer cylindrical wall or longitudinal ring of magnets **1406**, an inner cylindrical wall or longitudinal ring of magnets **1408**. When assembled, the outer cylindrical wall **1406** and the inner cylindrical wall **1408** are longitudinally positioned between the first axial ring **1402** and the second axial ring of magnets **1404**. Additionally, the inner cylindrical wall **1408** is laterally positioned within the outer longitudinal ring of magnets **1406**. In the illustrated embodiment of FIG. **9C**, the outer cylindrical wall **1406** is composed of two portions or “rings”—a first outer ring **1406a** and a second outer ring **1406b**. Similarly, the inner cylindrical wall **1408** is composed of two portions or inner rings: a first ring **1408a** and a second ring **1408b**.

As discussed in previous embodiments, each outer ring **1406a** and **1406b** comprises a plurality of curved magnets. A plurality of inner longitudinal grooves **1240a** are defined and radially spaced around an inner surface **1242a** of the first outer cylinder wall **1206**. The plurality of outer magnets forming the first portion **1406a** of the outer magnetic wall **1406** are sized to fit within the plurality of inner longitudinal grooves **1240a**. Similarly, a plurality of inner longitudinal grooves **1240b** are defined and radially spaced around an inner surface **1242b** of the second outer cylinder wall **1210**. The plurality of outer magnets forming the second portion **1406b** of the outer magnetic wall **1406** are sized to fit within the plurality of inner longitudinal grooves **1240b**.

Each inner magnetic ring portion **1404a** and **1404b** also comprises a plurality of curved magnets. A plurality of outer longitudinal grooves **1244a** are defined and radially spaced around an outer surface **1246a** of the first inner cylinder wall **1207** of the back iron circuit **1200**. The plurality of inner magnets forming the first portion **1408a** of the inner magnetic wall **1408** are sized to fit within the plurality of outer longitudinal grooves **1244a**. Similarly, a plurality of outer longitudinal grooves **1244b** are defined and radially spaced around an outer surface **1246b** of the second outer cylinder wall **1211**. The plurality of inner magnets forming the second portion **1408b** of the inner magnetic wall **1408** are sized to fit within the plurality of outer longitudinal grooves **1244b**.

Thus, the plurality of grooves **1240a**, **1240b**, **1244a** and **1244b** positioned and structurally support the plurality of magnets forming the outer cylindrical wall **1406** and the inner cylindrical wall **1408**.

FIG. **10A** is an isometric assembled view of the system **900** using the magnetic disc assembly **1400** and back iron circuit **1200** (FIGS. **9A** to **9C**). In contrast, FIG. **10B** is an exploded isometric view of the system **900**. Referring now to both FIGS. **10A** and **10B**, the magnetic disc assembly **1400** is used as a component in the system **900**. The magnetic disc assembly **1400** includes a coil assembly **1500** (which is similar to the coil assembly **500** discussed above). Depending on the configuration, the system **900** can be either an electric motor or an electric generator.

17

In certain embodiments, the system 900 includes a stator side end plate 902 and an extension or support ring 904 which fixedly couples the coil assembly 1500 to the stator side end plate 902. The stator side end plate 902 includes a series of apertures 903 arranged in a circular configuration. Similarly, the support ring 904 also has a series of apertures 905 defined in a circular configuration which are sized and spaced to align the apertures 903 of the stator side end plate 902 when the system 900 is assembled. Screws, bolts or other fasteners may extend through some of the apertures 903 and 905 to secure the stator side end plate 902 to the coil assembly 1500.

When assembled, an end of a rotor shaft 1302 extends through the stator side end plate 902 as illustrated in FIG. 10A. The rotor hub 1300 couples to the rotor shaft 1302 and supports the back iron circuit 1200, which in turn supports the toroidal magnetic cylinder 430 (not visible in FIGS. 10A and 10B). The opposing end of the rotor shaft 1302 is supported by a rotor side end plate 908. When assembled, a pair of side plates 910 and 912 couple the stator side end plate 902 to the rotor side end plate 908 as illustrated in FIG. 10A. As is known in the art, the rotor shaft 1302 is a mechanical load transferring device that either inputs a mechanical rotation force into the system when in generator mode or produces a mechanical rotational force when the system is in motor mode.

FIG. 10C is another exploded illustration of the system 900 where the stator or coil assembly 1500 is coupled to and supported by the stator end plate 902 via the extension ring 904. Thus, the end plates 902 and 908, the extension ring 904, and the coil assembly 1500 (the stator) are stationary in this configuration. In contrast, the rotor hub 1300 is fixedly coupled to the back iron circuit 1200 which supports and positions the toroidal magnetic cylinder 1430 (not shown in FIG. 10C). The rotor shaft 1302 is structurally supported by the stator end plate 902 and the rotor end plate 904. Bearing units 912 and 914 are positioned between the ends of the rotor shaft 1302 and the end plates to allow the rotor shaft to rotate with respect to the end plates. Thus, as illustrated in FIG. 10C, the coil assembly 1500 (or stator) is fixedly coupled to the end plate 902. In contrast, the toroidal magnetic disc 1430 and the back iron circuit 1200 (or rotor) is rotatably coupled to the end plate 908. The endplates 902 and 908 secure the entire arrangement of the machine and will ensure the integrity of the rotating components.

In certain embodiments, wires and cooling medium may enter the coil assembly 500 from the dedicated end plate 902 via the extension ring 904 via the apertures 903 and 905, respectively. In contrast, the rotating components (the toroidal magnetic disc 1430 and the back iron circuit 1200) may be coupled together and will be coupled in tandem with the rotor hub 1300, which in turn is fixedly coupled to the shaft 1302.

FIG. 10D is a partial exploded view illustrating certain details regarding the rotor hub 1300. The coil assembly 1500 and the outer walls 1206 and 1210 of the back iron circuit have been removed for clarity. The rotor hub 1300 includes a plurality of support shoulders positioned longitudinally along the length of the shaft 1302. A first bearing support shoulder 1320 engages and supports the bearing unit 912. A first centering shoulder 1322 couples to and supports the first side wall 1208 of the back iron circuit 1200. A center shoulder 1324 engages with and supports the inner cylindrical walls 1207 and 1211 of the back iron circuit 1200. A second centering shoulder 1326 supports the second side wall 1212 of the back iron circuit 200. A second bearing support shoulder 1328 is designed to engage with and

18

support the second bearing unit 914. In certain embodiments, a keyway 1330 (see FIG. 10B) may be defined in either end of the rotor shaft 1302.

In the embodiment illustrated in FIGS. 10A through 10D, the coil assembly 1500 is the stator. In other configurations, the coil assembly 1500 may be a rotor. Furthermore, the embodiments as illustrated is only one way of configuring and supporting the coil assembly 1500. In other embodiments the coil assembly 1500 may be supported by support ring extending through a center slot 410 between the outer cylindrical walls 206 and 210 from the coil assembly to an exterior casing or housing (FIGS. 7A and 7B). In yet other embodiments when the coil assembly 500 is functioning as a rotor, the coil assembly may be supported by a support ring extending through a center slot between the inner cylindrical walls 208 and 218 from the coil assembly to the shaft. The exact configuration depends on design choices as to whether the coil assembly is to be the stator or the rotor.

Advantages of Certain Embodiments

In sum, certain disclosed embodiments have several advantages when compared to traditional motors and generators. Surrounding the coils with magnets as described above creates more flux density and the forces are now all in the direction of motion which may create more torque, minimize vibration, and minimize noise—as compared to conventional motors where forces may try to pull the coil downwards or push it upwards (depending on the polarity), not in the direction of motion. As discussed above, most of the magnetic fields generated are in the direction of motion so there is little, if any, wasted field structure. Continuous torque and continuous power, therefore, are greatly increased. Furthermore, continuous torque density, continuous power density by volume, and continuous power density by weight are also increased when compared to conventional electric motors.

In certain embodiments, the equivalent full torque is available at start with no locked rotor current losses. The permanent magnet configuration has reduced inrush current at start.

In certain embodiments, the coil assembly may be compact and yet the coils are easily cooled because they are surrounded by an effective heat sink. Because there is no reason to overlap the coil windings, there is little, if any unwanted field induction—which also contributes to a more efficient design. One of the advantages of this configuration over conventional motors is that the end turns (in this case the radial section of the coils) are part of the “active section” of the invention. In conventional motors, the axial length of the copper conductor is the section that produces power. The end turns are a penalty, adding weight and losses, but not producing power because the end region fields are not effectively linking the end windings. However, in the above disclosed embodiments, the entire coil winding is effectively used to produce torque due to the side wall or axial magnets which are axially magnetized—efficiently utilizing the copper windings.

As discussed above, surrounding the coils with magnets as described above creates more flux density and the forces are now all in the direction of motion which may create more torque, minimize vibration, and minimize noise—as compared to conventional motors where forces may try to pull the coil downwards or push it upwards (depending on the polarity), not in the direction of motion.

Continuous torque and continuous power, therefore, are greatly increased. Furthermore, continuous torque density,

19

continuous power density by volume, and continuous power density by weight are also increased when compared to conventional electric motors.

In the "DC" configuration, the motor may run independent of power line frequency or manufactured frequencies reducing the need for expensive pulse width modulated drive controllers or similar controllers.

The foregoing description of the embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many combinations, modifications and variations are possible in light of the above teaching. For instance, in certain embodiments, each of the above described components and features may be individually or sequentially combined with other components or features and still be within the scope of the present invention. Undescribed embodiments which have interchanged components are still within the scope of the present invention. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims or future claims supported by the disclosure.

The invention claimed is:

1. A rotary motor/generator comprising:
 - a toroidal magnetic cylinder comprising a first magnetic tunnel segment radially arranged about an axial axis to form a circular path, wherein the first magnetic tunnel segment comprises:
 - a first side magnetic wall having a magnetic pole orientation that points generally towards an interior of the first magnetic tunnel segment;
 - a first opposing side magnetic wall having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment and positioned along the axial axis a predetermined distance from the first side magnetic wall;
 - a first inner magnetic wall generally spanning between the first side magnetic wall and the first opposing side magnetic wall in a generally axial direction and having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment;
 - a first outer magnetic wall generally spanning between the first side magnetic wall and the first opposing side magnetic wall in a axial direction, positioned radially away from the first inner magnetic wall, and having a magnetic pole orientation that points generally towards the interior of the first magnetic tunnel segment;
 - wherein like magnetic poles of magnets forming the first inner magnetic wall and magnets forming the first side magnetic wall are orientated in an opposite direction from the like poles of magnets forming the first outer magnetic wall and magnets forming the first opposing ring magnetic wall, and wherein at least one of the first inner magnetic wall and the first outer magnetic wall includes a slot configured to receive a support structure; and
 - a coil assembly positioned within the circular path and adapted to move relative to the toroidal magnetic cylinder, wherein the coil assembly is positioned relative to the toroidal magnetic cylinder by the support structure.
2. The rotary motor/generator of claim 1, wherein the toroidal magnetic cylinder further comprises a second magnetic tunnel segment radially arranged about the axial axis

20

positioned adjacent to the first magnetic tunnel segment to form a circular path, wherein the second magnetic tunnel segment comprises:

- a second side magnetic wall having a magnetic pole orientation that points generally towards an interior of the second magnetic tunnel segment;
 - a second opposing side magnetic wall having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment and positioned along the axial axis the predetermined distance from the second side magnetic wall;
 - a second inner magnetic wall generally spanning between the second side magnetic wall and the second opposing side magnetic wall in a generally axial direction and having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment;
 - a second outer magnetic wall generally spanning between the second side magnetic wall and the second opposing side magnetic wall in a axial direction, positioned radially away from the second inner magnetic wall, and having a magnetic pole orientation that points generally towards the interior of the second magnetic tunnel segment;
- wherein like magnetic poles of magnets forming the second inner magnetic wall and magnets forming the second side magnetic wall are orientated in an opposite direction from the like poles of magnets forming the second outer magnetic wall and magnets forming the second opposing ring magnetic wall, and the like magnetic poles of magnets forming the second magnetic tunnel segment are orientated in an opposite direction from the like magnet poles of the magnets forming the first magnetic tunnel segment.
3. The rotary motor/generator of claim 1, wherein the coil assembly further comprises:
 - a ring-like core;
 - a plurality of teeth radially positioned about the ring-like core and extending from the ring-like core to form a plurality of slots; and
 - a plurality of coil windings wherein each coil winding in the plurality of winding is positioned within a slot within the plurality of slots.
 4. The rotary motor/generator of claim 1, further comprising a back iron circuit generally surrounding the toroidal magnetic cylinder.
 5. The rotary motor/generator of claim 4, further comprising longitudinal grooves defined in the back iron circuit for positioning and supporting the magnets forming the first outer magnetic wall and the first inner magnetic wall.
 6. The rotary generator/motor of claim 1, further comprising a hub coupled to the coil assembly and a shaft coupled to the hub.
 7. The rotary generator/motor of claim 1, further comprising a hub coupled to the toroidal magnetic cylinder and a shaft coupled to the hub.
 8. The rotary generator/motor of claim 1, further comprising an exterior circumferential slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.
 9. The rotary generator/motor of claim 1, further comprising an interior circumferential slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.

21

10. The rotary generator/motor of claim 1, further comprising a side circular slot defined in the toroidal magnetic cylinder to allow for passage of a structural support and/or electrical conductors.

11. The rotary generator/motor of any one of claims 8 through 10, further comprising a means for preventing the magnetic flux forces within the interior of the tunnel from escaping through the slots.

12. The rotary generator/motor of claim 1, further comprising:

- a support ring coupled to the coil assembly and partially extending through the side circular slot;
- a first end plate coupled to the support ring.

13. The rotary generator/motor of claim 12, further comprising:

- a shaft coupled to the toroidal magnetic cylinder;
- a second end plate coupled rotatably coupled to the shaft;
- a means for connecting the first end plate to the second end plate.

14. The rotary generator/motor of claim 1, wherein the first inner magnetic wall, the first outer magnetic wall, the first ring magnetic wall and the first opposing ring magnetic wall may be formed from electromagnets.

15. The rotary generator/motor of claim 1, wherein a tangential magnetic force is generated on all sides of individual coils in the plurality of coils when the individual coil is positioned within the first magnetic tunnel segment or second magnetic tunnel segment.

16. A method of producing mechanical rotation, the method characterized by: forming a first area of magnetic concentration within a first interior cavity defined by an first outer magnetic cylinder wall having a first magnetic pole facing the interior cavity, a first inner magnetic cylinder wall having a second magnetic pole facing the interior cavity, a first magnetic side wall having a third magnetic pole facing the interior cavity, and a first opposing magnetic side wall

22

having a fourth magnetic pole facing the interior cavity, wherein the first and third magnetic poles are of opposite polarities from the second and fourth magnetic poles; positioning a coil within the first interior cavity; applying a current in a first direction to the coil to cause the coil to rotate relative to the first interior cavity; coupling a longitudinal shaft to the coil such that as the coil rotates, the longitudinal shaft rotates; forming a second area of magnetic concentration within a second interior cavity positioned circumferentially adjacent to the first interior cavity defined by an second outer magnetic cylinder wall having a fifth magnetic pole facing the interior cavity, a second inner magnetic cylinder wall having a sixth magnetic pole facing the interior cavity, a second magnetic side wall having a seventh magnetic pole facing the interior cavity, and a second opposing magnetic side wall having an eighth magnetic pole facing the interior cavity, wherein the fifth and seventh magnetic poles are of opposite polarities from the sixth and eighth magnetic poles.

17. The method of producing mechanical rotation of claim 16 further comprising: applying a current in a first direction to the coil to cause the coil to move to the second interior cavity; applying a current in a second direction to the coil when the coil is within the second interior cavity to move the coil out of the second interior cavity; and coupling a longitudinal shaft to the coil such that as the coil rotates from the first interior cavity to the second interior cavity, the longitudinal shaft rotates.

18. The method of producing mechanical rotation of claim 16 further comprising: wherein the first through fourth magnetic poles are of an opposite polarity than the fifth through eighth magnetic poles; rotating the coil within the second interior cavity; and extracting from the coil a current having a second direction when the coil moves through the second interior cavity.

* * * * *