



US006796715B2

(12) **United States Patent**
Chiu et al.

(10) **Patent No.:** **US 6,796,715 B2**
(45) **Date of Patent:** **Sep. 28, 2004**

(54) **FIBER OPTIC MODULES WITH
PULL-ACTION DE-LATCHING
MECHANISMS**

(75) Inventors: **Liew C. Chiu**, Singapore (SG); **Ron C. Pang**, Singapore (SG); **Yong P. Sim**, Singapore (SG); **Kee S. Tan**, Singapore (SG); **Edwin Dair**, Los Angeles, CA (US)

(73) Assignee: **E20 Communications, Inc.**, Calabasas, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 264 days.

(21) Appl. No.: **09/939,413**

(22) Filed: **Aug. 23, 2001**

(65) **Prior Publication Data**

US 2002/0150344 A1 Oct. 17, 2002

Related U.S. Application Data

(63) Continuation-in-part of application No. 09/896,695, filed on Jun. 28, 2001.

(60) Provisional application No. 60/283,843, filed on Apr. 14, 2001.

(51) **Int. Cl.**⁷ **G02B 6/36**; G02B 6/38;
G02B 6/00

(52) **U.S. Cl.** **385/53**; 385/56; 385/59;
385/134

(58) **Field of Search** 385/53–84, 134

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,835,251 A	12/1931	Wetstein
1,899,360 A	2/1933	Roudebush et al.
2,384,267 A	9/1945	Andersen
2,714,195 A	7/1955	Beatty
2,760,174 A	8/1956	Burt et al.
2,767,008 A	10/1956	Oswald
2,872,139 A	2/1959	Bedford, Jr.

2,881,404 A	4/1959	Kamm
2,899,669 A	8/1959	Johanson
3,017,232 A	1/1962	Schwab et al.
3,035,243 A	5/1962	Bowling
3,311,863 A	3/1967	Beale
3,398,390 A	8/1968	Long
3,408,614 A	10/1968	Kuwahata
3,451,034 A	6/1969	Beale
3,476,258 A	11/1969	Dorsett

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

GB	2 297 007 A	7/1996
JP	07-225327	8/1995
JP	07-225328	8/1995
WO	WO 95/12227	5/1995

OTHER PUBLICATIONS

US 6,554,622, 4/2003, Engel et al. (withdrawn)
Shinichi Sasaki, A Compact Optical Active Connector: An Optical Interconnect Module with an Electrical Connector Interface, IEEE Transactions on Advanced Packaging, pp. 541–550, vol. 22, No. 4, Nov. 1999.

Nagesh R. Basavanahally et al, "Optoelectronic Packaging," Chapter 2, Communication System Interconnection Structure, pp. 11–23, 38–43, John Wiley & Sons, Inc., New York.

Primary Examiner—John D. Lee


Assistant Examiner—Tina M Lin

(74) *Attorney, Agent, or Firm*—Blakely Sokoloff Taylor & Zafman

(57) **ABSTRACT**

Fiber optic modules having a pull-actuator to unlatch and withdraw (i.e. unplug) it from a cage assembly or a module receptacle. The pull-actuator includes a pull-tab, an arm or push rod, and a catch to couple to a pivot-arm actuator. The pivot-arm actuator pivotally latches to the pull-actuator and to the cage assembly or module receptacle. The pull-actuator makes it easy to de-latch and unplug a fiber optic module. A nose grip is further provided to pull the fiber optic module away from the cage or module receptacle. A belly-to-belly mounting configuration is introduced for the pull-release fiber optic modules.

42 Claims, 43 Drawing Sheets

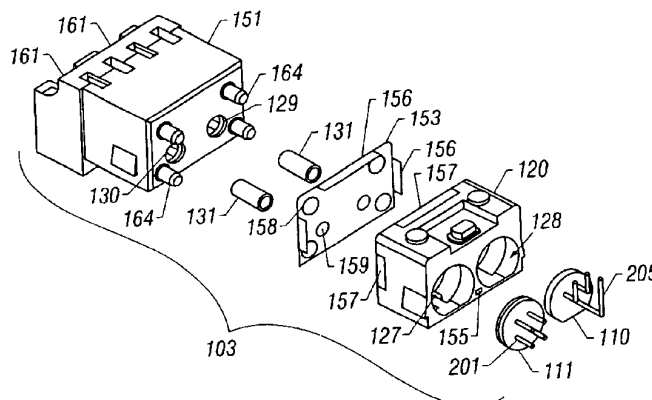

US 6,796,715 B2

Page 2

U.S. PATENT DOCUMENTS

3,495,206 A	2/1970	Pfister	4,737,008 A	4/1988	Ohyama et al.
3,518,612 A	6/1970	Dunman et al.	4,756,593 A	7/1988	Koakutsu et al.
3,566,190 A	2/1971	Huebner et al.	4,762,388 A	8/1988	Tanaka et al.
3,566,336 A	2/1971	Johnson et al.	4,767,179 A	8/1988	Sampson et al.
3,576,515 A	4/1971	Frantz	4,779,950 A	10/1988	Williams
3,594,698 A	7/1971	Anhalt	4,787,706 A	11/1988	Cannon, Jr. et al.
3,668,605 A	6/1972	Albert	4,789,218 A	12/1988	Paul et al.
3,736,471 A	5/1973	Donze et al.	4,798,430 A	1/1989	Johnson et al.
3,767,974 A	10/1973	Donovan, Jr. et al.	4,798,440 A	1/1989	Hoffer et al.
3,784,954 A	1/1974	Grimm et al.	4,821,145 A	4/1989	Corfits et al.
3,798,507 A	3/1974	Damon et al.	4,838,810 A	6/1989	Yoshimura et al.
3,803,409 A	4/1974	Prochazka	4,840,451 A	6/1989	Sampson et al.
3,806,225 A	4/1974	Codrino	4,861,134 A	8/1989	Alameel et al.
3,809,908 A	5/1974	Clanton	4,872,736 A	10/1989	Myers et al.
3,915,538 A	10/1975	Gruhn, Jr. et al.	4,900,263 A	2/1990	Manassero et al.
3,950,059 A	4/1976	Anhalt et al.	4,906,197 A	3/1990	Noll
3,951,514 A	4/1976	Medina, Jr.	4,944,568 A	7/1990	Danbach et al.
3,952,232 A	4/1976	Coules	4,960,317 A	10/1990	Briggs et al.
4,045,109 A	8/1977	Langenbach et al.	4,969,924 A	11/1990	Suverison et al.
4,064,551 A	12/1977	Lightfoot	4,986,625 A	1/1991	Yamada et al.
4,070,081 A	1/1978	Takahashi	4,991,062 A	2/1991	Nguyenngoc
4,083,616 A	4/1978	McNiece et al.	4,995,821 A	2/1991	Casey
4,083,619 A	4/1978	McCormick et al.	4,997,386 A	3/1991	Kawachi et al.
4,084,882 A	4/1978	Hogan et al.	5,005,939 A	4/1991	Arvanitakis et al.
4,140,367 A	2/1979	Makuch et al.	5,011,425 A	4/1991	VanZanten et al.
4,149,072 A	4/1979	Smith et al.	5,013,247 A	5/1991	Watson
4,152,038 A	5/1979	Inouye et al.	5,016,968 A	5/1991	Hammond et al.
4,167,303 A	9/1979	Bowen et al.	5,021,003 A	6/1991	Ohtaka et al.
4,197,572 A	4/1980	Aimar	5,039,194 A	8/1991	Block et al.
4,217,030 A	8/1980	Howarth	5,042,891 A	8/1991	Mulholland et al.
4,226,491 A	10/1980	Kazama et al.	5,044,982 A	9/1991	Bertini
4,233,646 A	11/1980	Leung et al.	5,062,806 A	11/1991	Ohno et al.
4,243,283 A	1/1981	McSparran	5,067,785 A	11/1991	Schirbl et al.
4,260,210 A	4/1981	Babuka et al.	5,071,219 A	12/1991	Yurtin et al.
4,268,114 A	5/1981	dAuria et al.	5,073,045 A	12/1991	Abendschein
4,273,413 A	6/1981	Bendiksen et al.	5,073,046 A	12/1991	Edwards et al.
4,295,181 A	10/1981	Chang et al.	5,076,656 A	12/1991	Briggs et al.
4,301,494 A	11/1981	Jordan	5,082,344 A	1/1992	Mulholland et al.
4,313,150 A	1/1982	Chu	5,083,931 A	1/1992	Davidge et al.
4,377,318 A	3/1983	Long	5,084,802 A	1/1992	Nguyenngoc
4,384,368 A	5/1983	Rosenfeldt et al.	5,091,991 A	2/1992	Briggs et al.
4,387,956 A	6/1983	Cline	5,099,307 A	3/1992	Go et al.
4,398,073 A	8/1983	Botz et al.	5,101,463 A	3/1992	Cubukciyan et al.
4,406,514 A	9/1983	Hillegonds et al.	5,104,243 A	4/1992	Harding
4,410,222 A	10/1983	Enomoto et al.	5,109,453 A	4/1992	Edwards et al.
4,427,879 A	1/1984	Becher et al.	5,113,467 A	5/1992	Peterson et al.
4,432,604 A	2/1984	Schwab	5,116,239 A	5/1992	Siwinski
4,439,006 A	3/1984	Stevenson	5,117,476 A	5/1992	Yingst et al.
4,445,740 A	5/1984	Wallace	5,118,904 A	6/1992	Nguyenngoc
4,448,467 A	5/1984	Weidler	5,125,849 A	6/1992	Briggs et al.
4,449,784 A	5/1984	Basov et al.	5,134,679 A	7/1992	Robin et al.
4,460,230 A	7/1984	McKee et al.	5,138,678 A	8/1992	Briggs et al.
4,470,660 A	9/1984	Hillegonds et al.	5,140,663 A	8/1992	Edwards et al.
4,477,133 A	10/1984	Cosmo	5,142,597 A	8/1992	Mulholland et al.
4,477,146 A	10/1984	Bowen et al.	5,155,786 A	10/1992	Ecker et al.
4,491,981 A	1/1985	Weller et al.	5,159,652 A	10/1992	D'Alphonse et al.
4,522,463 A	6/1985	Schwenda et al.	5,163,109 A	11/1992	Okugawa et al.
4,526,427 A	7/1985	Boll et al.	5,163,847 A	11/1992	Regnier
4,527,285 A	7/1985	Kekas et al.	5,183,404 A	2/1993	Aldous et al.
4,541,036 A	9/1985	Landries et al.	5,195,897 A	3/1993	Kent et al.
4,548,467 A	10/1985	Stoerk et al.	5,195,911 A	3/1993	Murphy
4,553,813 A	11/1985	McNaughton et al.	5,199,093 A	3/1993	Longhurst
4,553,814 A	11/1985	Bahl et al.	5,204,929 A	4/1993	Machall et al.
4,611,887 A	9/1986	Glover et al.	5,212,681 A	5/1993	Bock et al.
4,619,493 A	10/1986	Kikuta	5,212,761 A	5/1993	Petrunia
4,678,264 A	7/1987	Bowen et al.	5,218,519 A	6/1993	Welch et al.
4,684,210 A	8/1987	Matsunaga et al.	5,234,353 A	8/1993	Scholz et al.
4,699,438 A	10/1987	Kikuta	5,238,426 A	8/1993	Arnett
4,699,455 A	10/1987	Erbe et al.	5,243,678 A	9/1993	Schaffer et al.
4,734,049 A	3/1988	George et al.	5,247,427 A	9/1993	Driscoll et al.
			5,253,320 A	10/1993	Takahashi et al.

US 6,796,715 B2

Page 3

5,256,080 A	10/1993	Bright	5,966,487 A	10/1999	Gilliland et al.
5,259,052 A	11/1993	Briggs et al.	5,980,324 A	11/1999	Berg et al.
5,262,923 A	11/1993	Batta et al.	6,047,172 A	4/2000	Babineau et al.
5,274,729 A	12/1993	King et al.	6,052,278 A	4/2000	Tanzer et al.
5,283,680 A	2/1994	Okugawa et al.	6,062,893 A	5/2000	Miskin et al.
5,286,207 A	2/1994	McHugh	6,074,228 A	6/2000	Berg et al.
5,289,345 A	2/1994	Corradetti et al.	6,085,006 A	7/2000	Gaio et al.
5,295,212 A	3/1994	Morton et al.	RE36,820 E	8/2000	McGinley et al.
5,315,679 A	5/1994	Baldwin et al.	6,101,087 A	8/2000	Sutton et al.
5,317,663 A	5/1994	Beard et al.	6,142,802 A	11/2000	Berg et al.
5,325,454 A	6/1994	Rittle et al.	6,142,828 A	11/2000	Pepe
5,325,455 A	6/1994	Henson et al.	6,149,465 A	11/2000	Berg et al.
5,329,428 A	7/1994	Block et al.	6,178,096 B1	1/2001	Flickinger et al.
5,329,604 A	7/1994	Baldwin et al.	6,179,627 B1	1/2001	Daly et al.
5,333,221 A	7/1994	Briggs et al.	6,186,670 B1	2/2001	Austin et al.
5,337,396 A	8/1994	Chen et al.	6,190,054 B1	2/2001	Tamaki et al.
5,361,318 A	11/1994	Go et al.	6,200,041 B1	3/2001	Gaio et al.
5,363,465 A	11/1994	Korkowski et al.	6,201,704 B1	3/2001	Poplawski et al.
D353,796 S	12/1994	Oliver et al.	6,203,333 B1	3/2001	Medina et al.
D354,271 S	1/1995	Speiser et al.	6,206,582 B1	3/2001	Gilliland
5,383,793 A	1/1995	Hsu et al.	6,220,873 B1	4/2001	Samela et al.
5,386,346 A	1/1995	Gleadall	6,220,878 B1	4/2001	Poplawski et al.
5,390,268 A	2/1995	Morlion et al.	6,226,188 B1	5/2001	Warren
5,398,295 A	3/1995	Chang et al.	6,229,708 B1	5/2001	Corbin, Jr. et al.
5,411,402 A	5/1995	Bethurum	6,231,145 B1	5/2001	Liu
5,412,497 A	5/1995	Kaetsu et al.	6,241,534 B1	6/2001	Neer et al.
5,425,646 A	6/1995	Green	6,267,606 B1	7/2001	Poplawski et al.
5,442,726 A	8/1995	Howard et al.	D446,501 S	8/2001	Donnell et al.
5,452,388 A	9/1995	Rittle et al.	6,276,943 B1	8/2001	Boutros et al.
5,463,532 A	10/1995	Petitpierre et al.	6,304,436 B1	10/2001	Branch et al.
5,469,526 A	11/1995	Rawlings	6,317,329 B1	11/2001	Dowdy et al.
5,470,238 A	11/1995	Walden	6,335,869 B1 *	1/2002	Branch et al. 361/816
5,481,634 A	1/1996	Anderson et al.	6,341,899 B1	1/2002	Shirakawa et al.
5,487,678 A	1/1996	Tsuji et al.	6,350,063 B1	2/2002	Gilliland et al.
5,491,613 A	2/1996	Petitpierre	6,358,082 B1	3/2002	Letourneau
5,515,468 A	5/1996	DeAndrea et al.	6,364,540 B2 *	4/2002	Shishikura et al. 385/88
5,528,408 A	6/1996	McGinley et al.	6,364,709 B1 *	4/2002	Jones 439/607
5,546,281 A	8/1996	Poplawski et al.	6,369,924 B1	4/2002	Scharf et al.
5,548,677 A	8/1996	Kakii et al.	6,371,787 B1	4/2002	Branch et al.
5,561,727 A	10/1996	Akita et al.	6,406,317 B1	6/2002	Li et al.
5,583,745 A	12/1996	Uwabo et al.	6,416,361 B1	7/2002	Hwang
5,596,663 A	1/1997	Ishibashi et al.	6,422,763 B1	7/2002	Halbach et al.
5,600,470 A	2/1997	Walsh	6,430,053 B1	8/2002	Peterson et al.
5,604,831 A	2/1997	Dittman et al.	6,431,901 B1	8/2002	Yeh
5,654,873 A	8/1997	Smithson et al.	6,431,902 B1	8/2002	Yeh
5,659,459 A	8/1997	Wakabayashi et al.	6,434,015 B1	8/2002	Hwang
D389,802 S	1/1998	Vernon	6,439,918 B1	8/2002	Togami et al.
5,717,533 A	2/1998	Poplawski et al.	5,555,555 A1	9/2002	Jones
5,734,558 A	3/1998	Poplawski et al.	6,485,322 B1	11/2002	Branch et al.
5,738,538 A	4/1998	Bruch et al.	6,494,623 B1	12/2002	Ahrens et al.
5,757,998 A	5/1998	Thatcher et al.	6,517,382 B2	2/2003	Flickinger et al.
5,766,027 A	6/1998	Fogg	6,519,160 B1 *	2/2003	Branch et al. 361/754
5,767,999 A	6/1998	Kayner	6,524,134 B2	2/2003	Flickinger et al.
5,797,771 A	8/1998	Garside	6,530,785 B1	3/2003	Hwang
5,820,398 A	10/1998	Stabroth et al.	6,533,603 B1	3/2003	Togami
5,829,996 A	11/1998	Yamane et al.	6,556,445 B2	4/2003	Medina
5,864,468 A	1/1999	Poplawski et al.	2002/0093796 A1	7/2002	Medina
5,865,646 A	2/1999	Ortega et al.	2002/0167793 A1	11/2002	Branch et al.
5,879,173 A	3/1999	Poplawski et al.	2003/0007738 A1 *	1/2003	Caims et al. 385/56
5,896,480 A	4/1999	Scharf et al.			
5,901,263 A *	5/1999	Gaio et al. 385/92			
5,931,290 A	8/1999	Wehrli, III et al.			

* cited by examiner

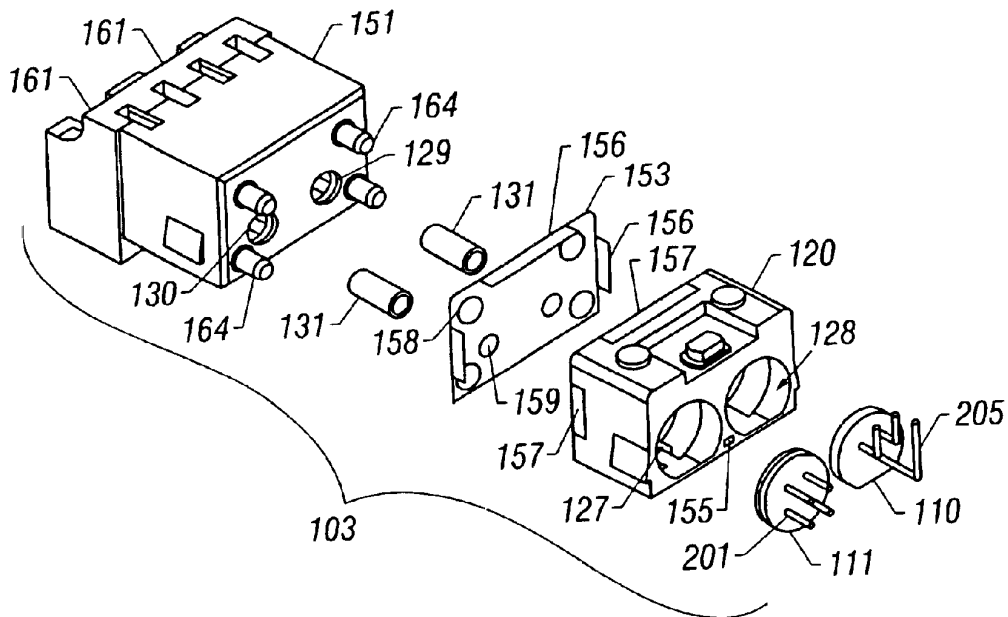


FIG. 1

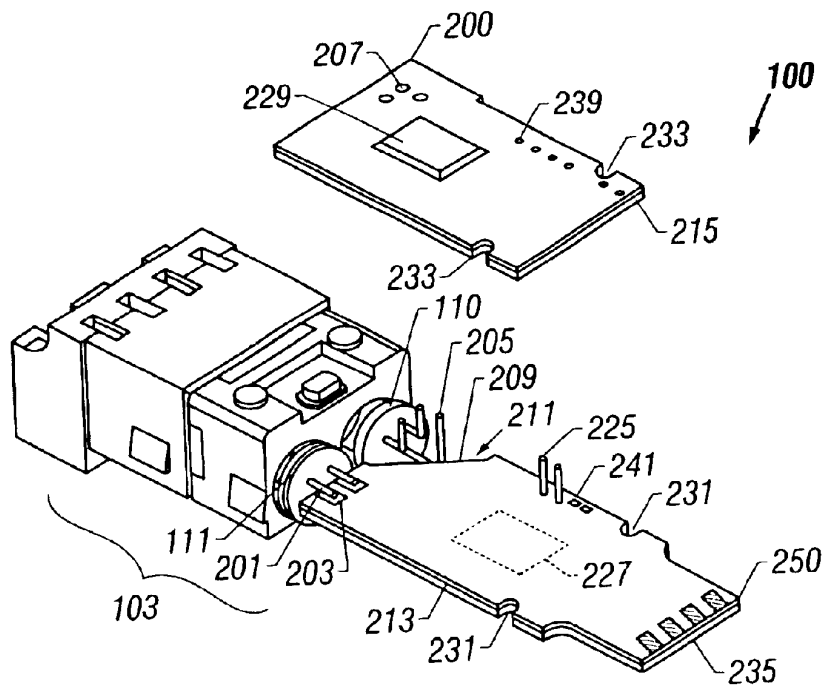


FIG. 2

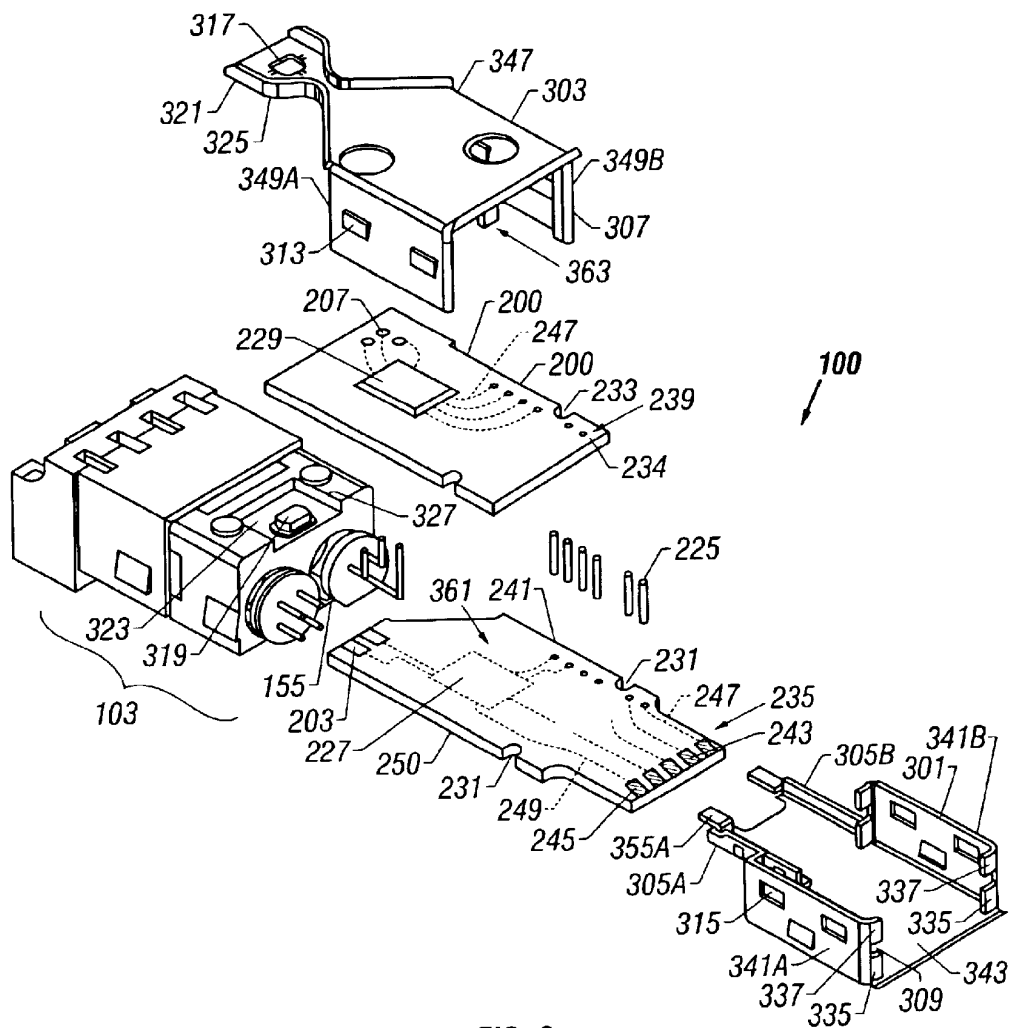


FIG. 3

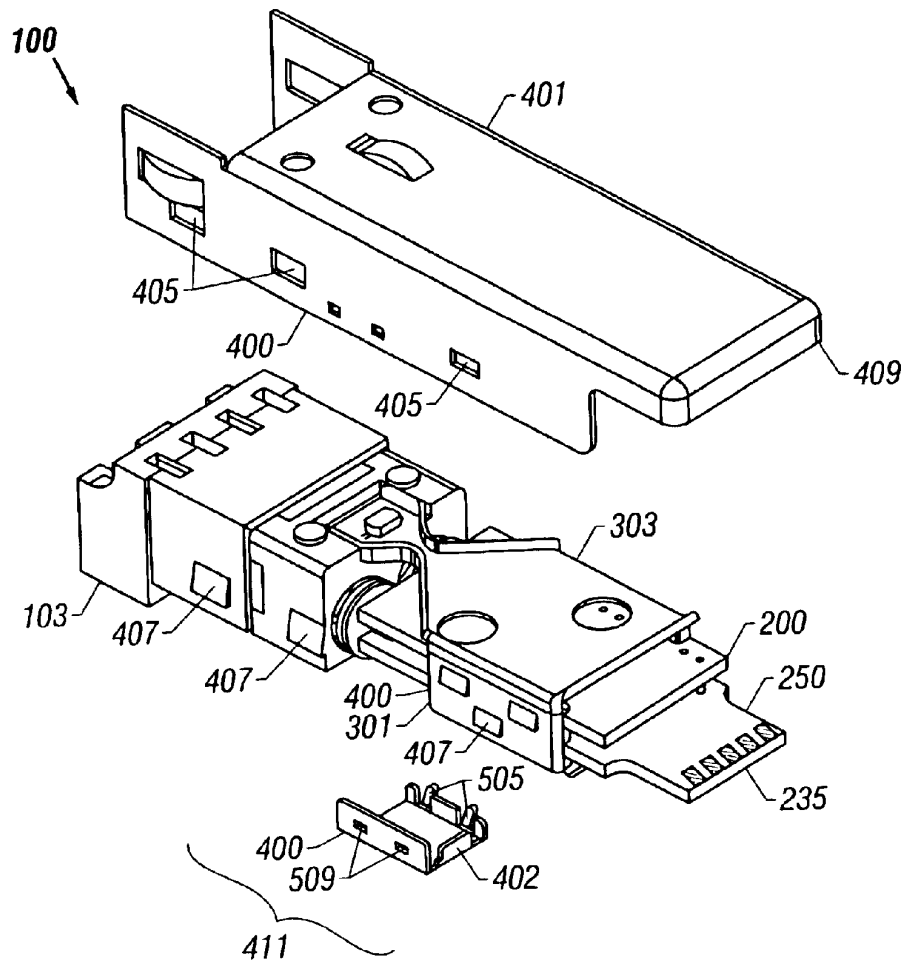


FIG. 4A

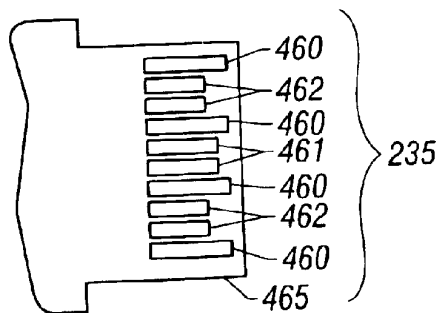


FIG. 4B

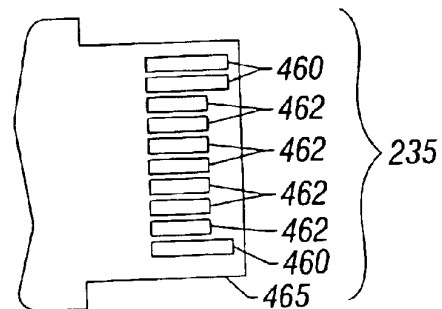


FIG. 4C

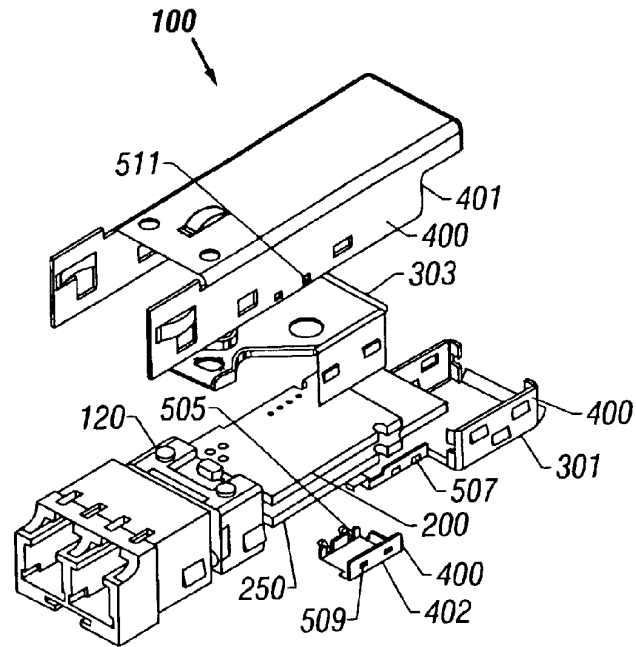


FIG. 5

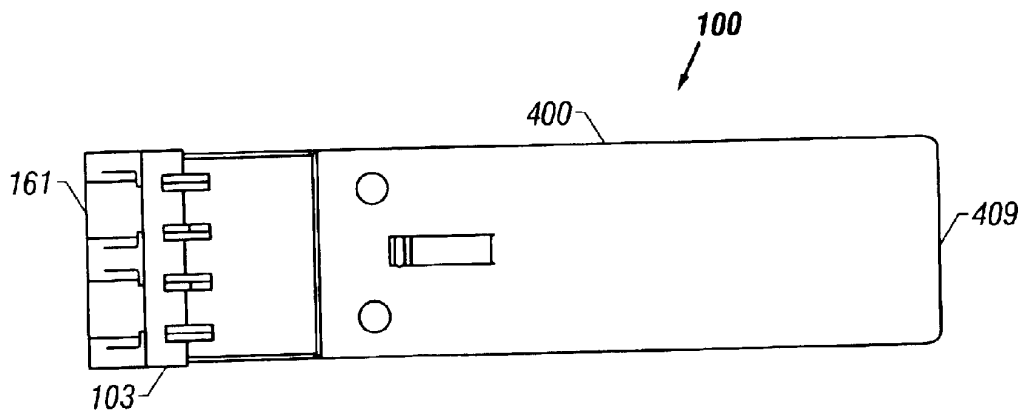


FIG. 6A

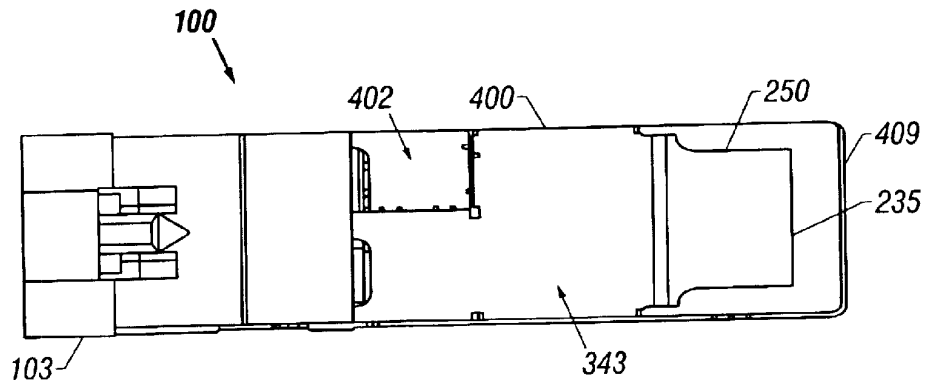


FIG. 6B

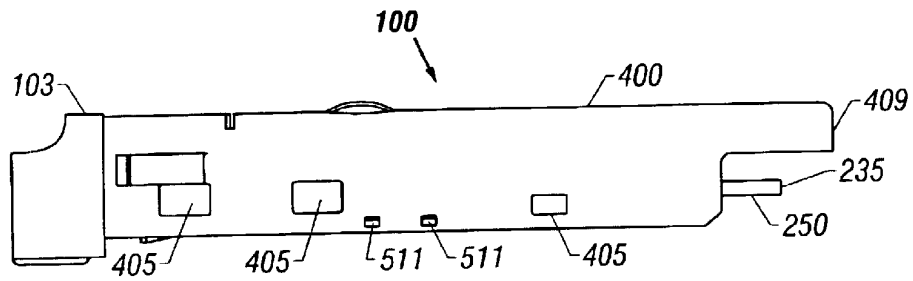


FIG. 6C

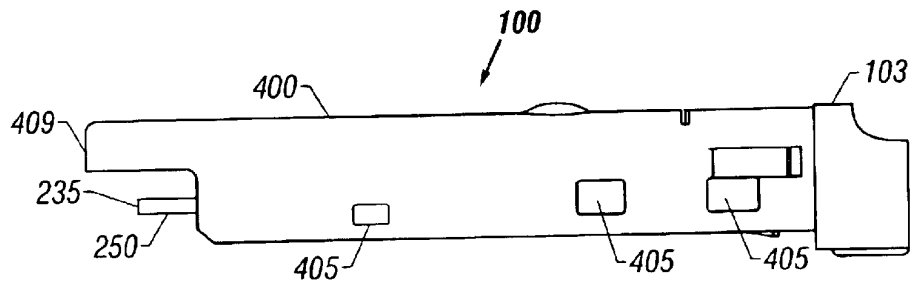


FIG. 6D

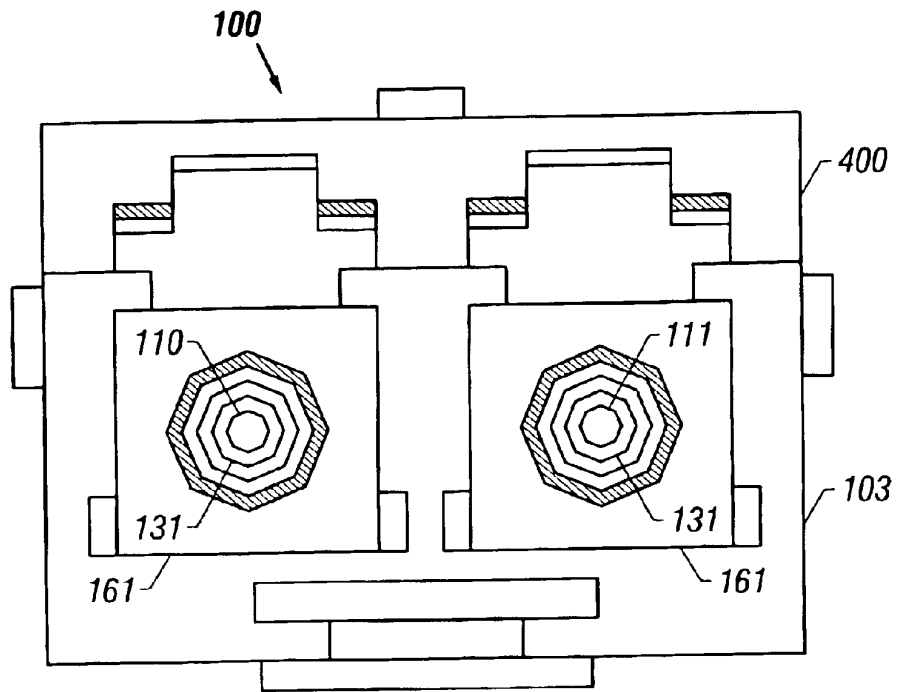


FIG. 6E

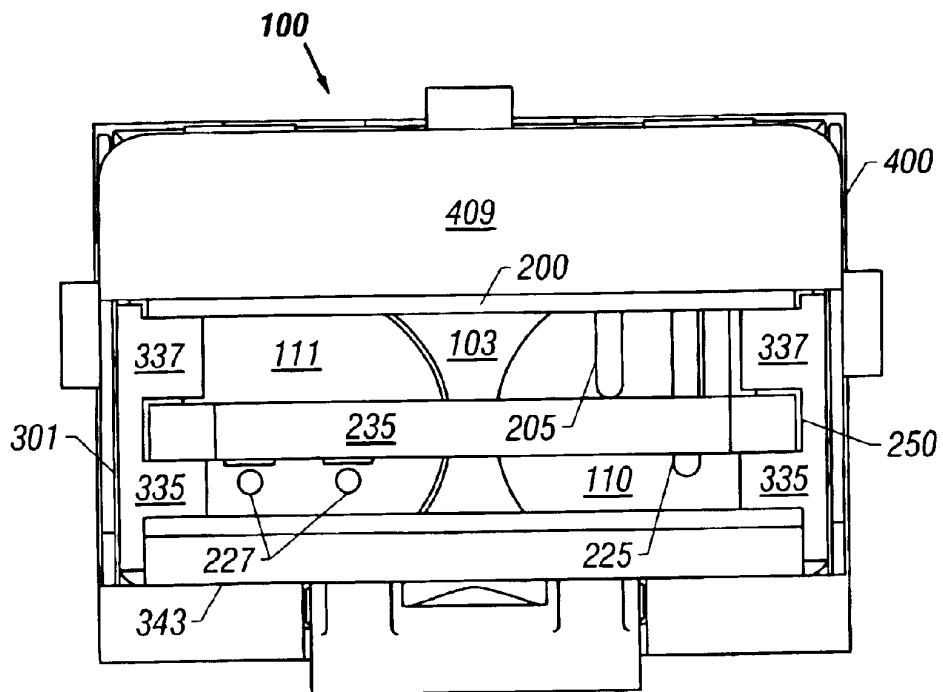


FIG. 6F

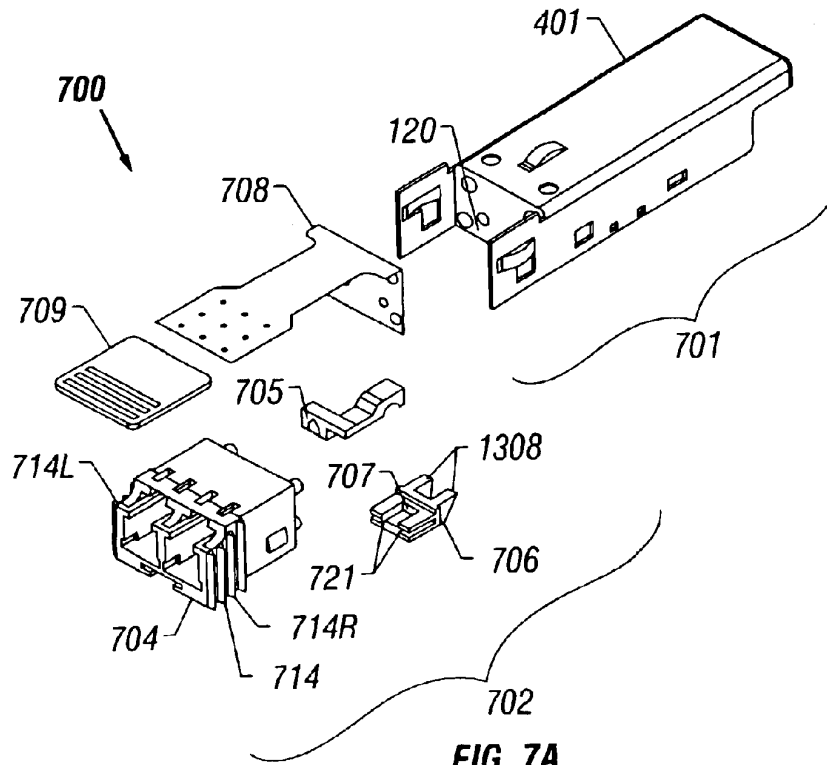


FIG. 7A

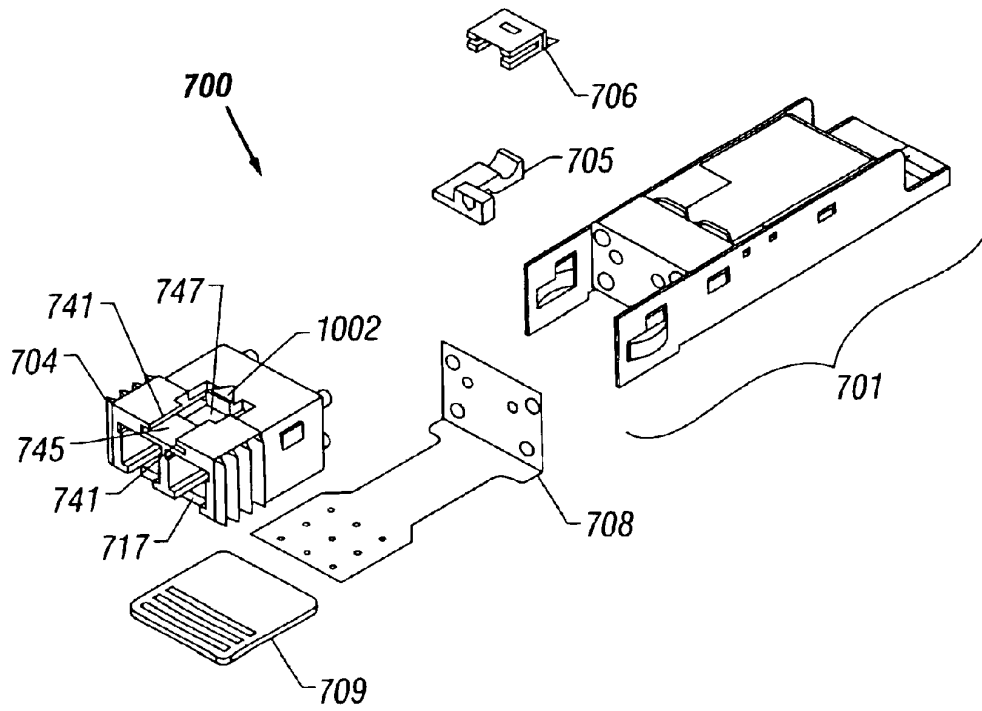


FIG. 7B

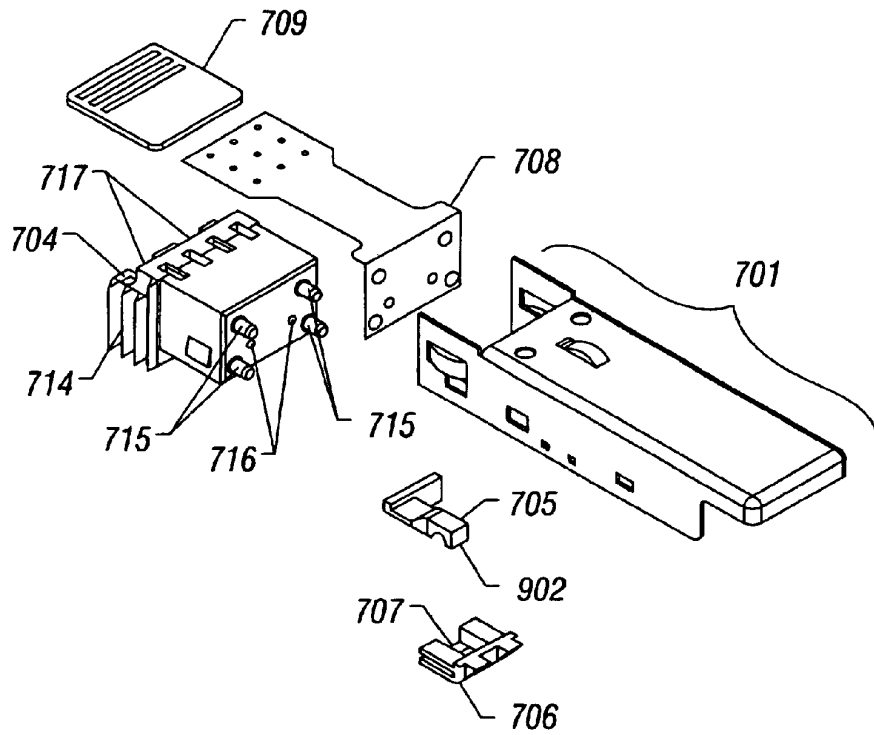


FIG. 7C

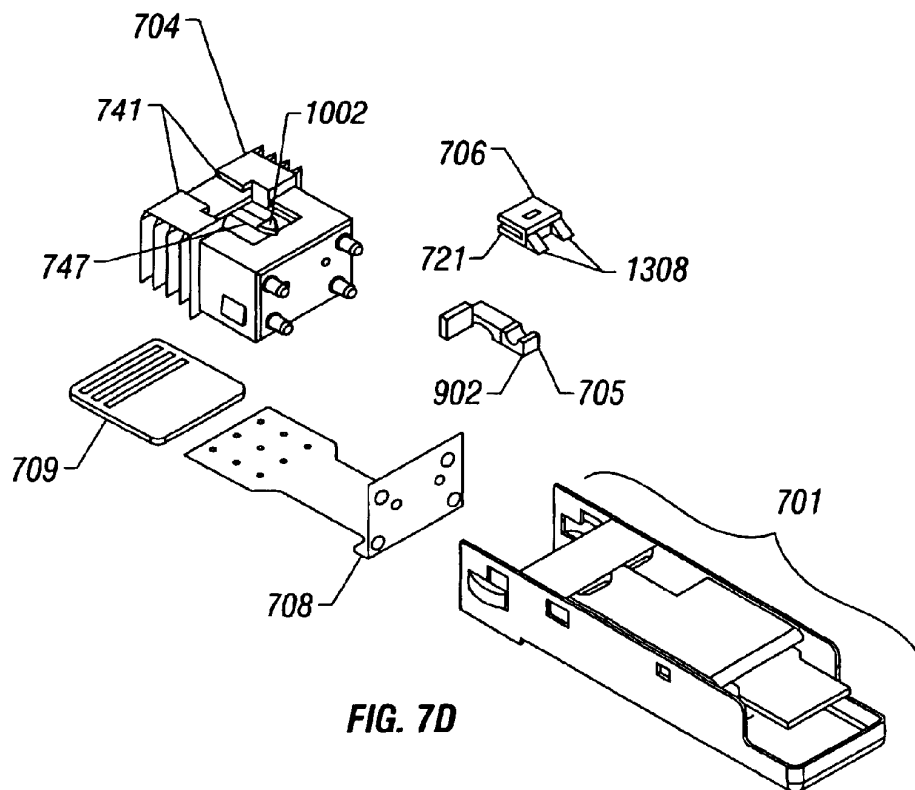


FIG. 7D

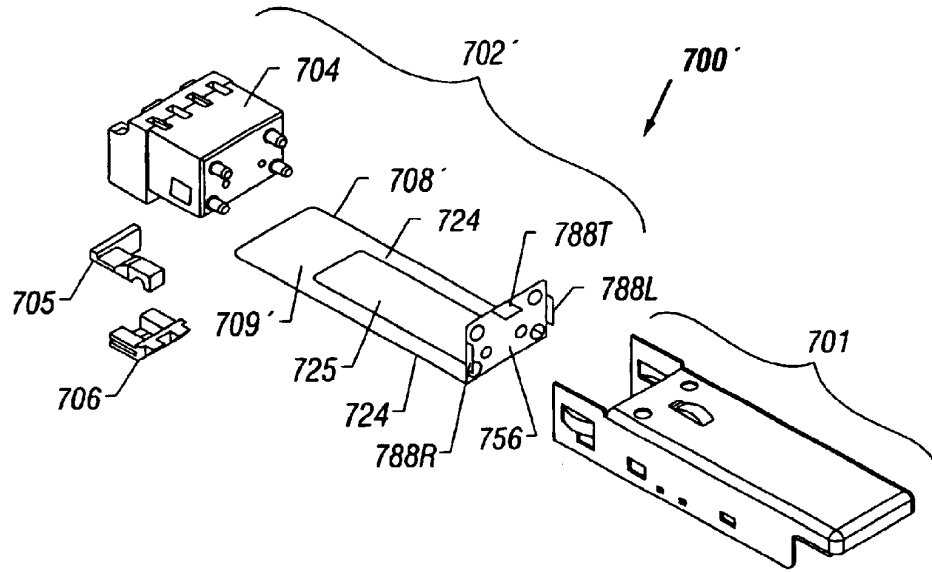


FIG. 7E

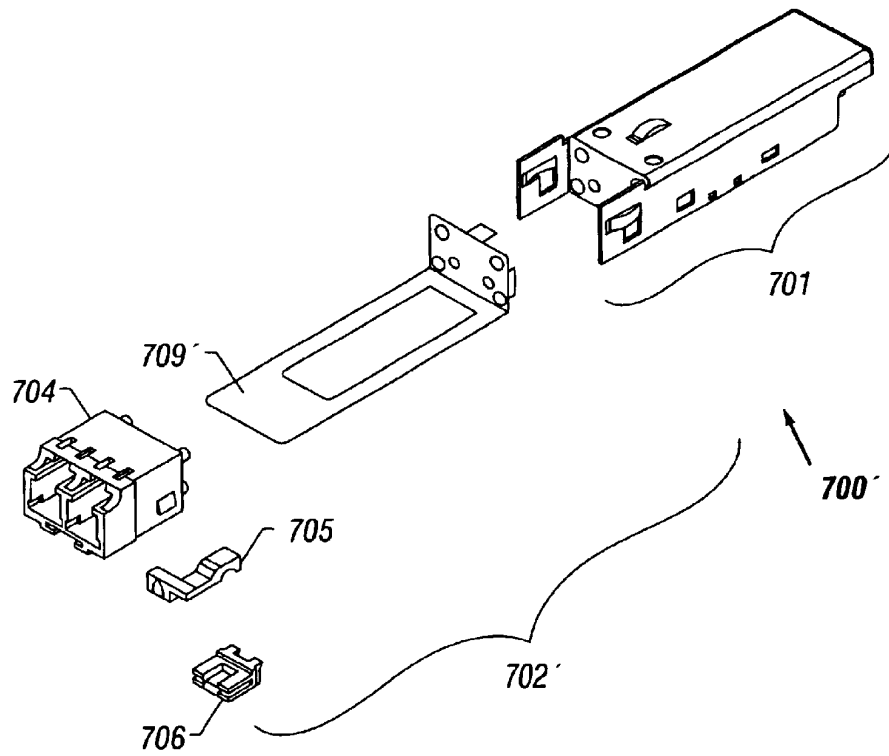


FIG. 7F

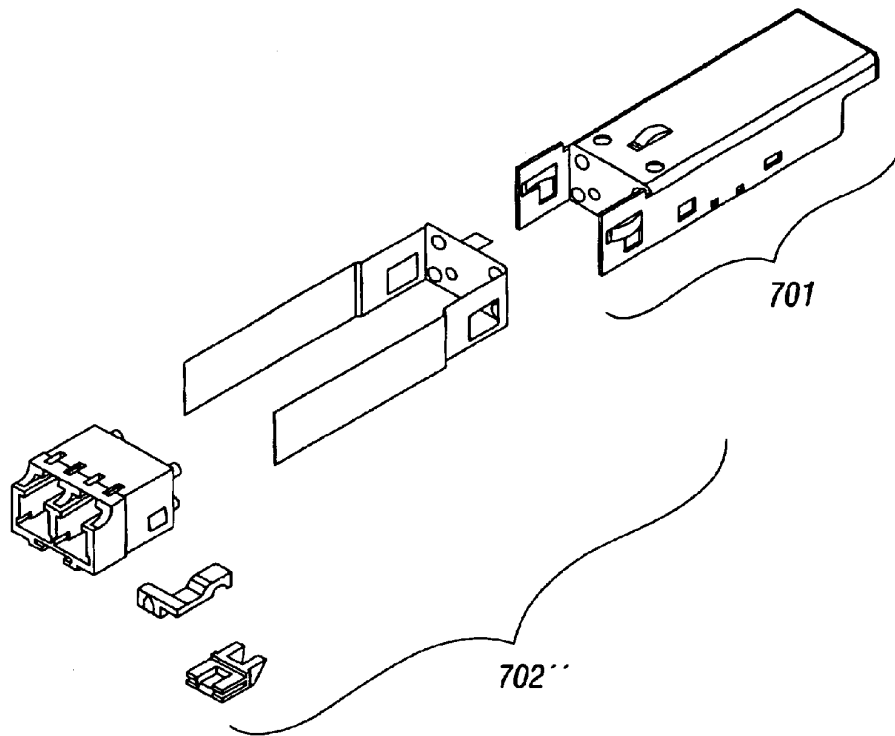


FIG. 7G

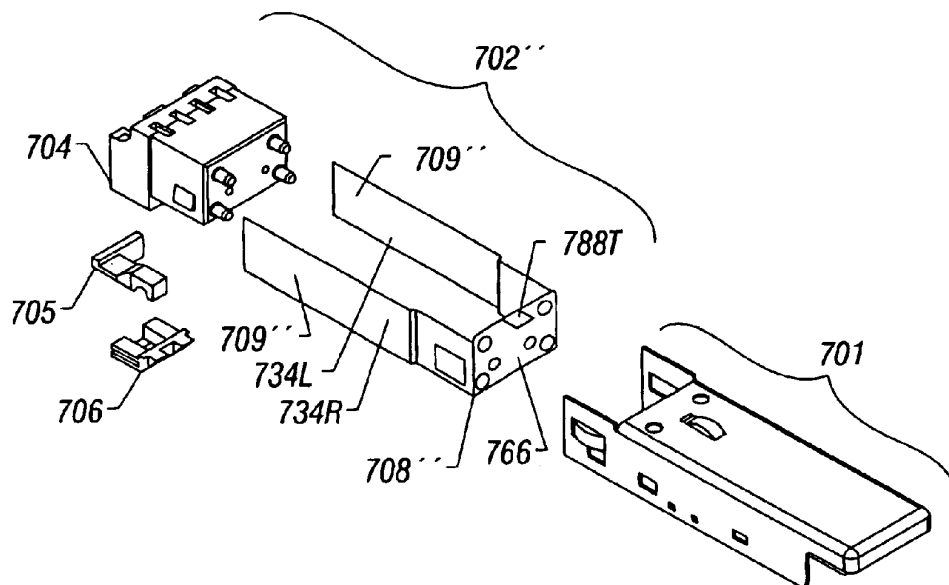


FIG. 7H

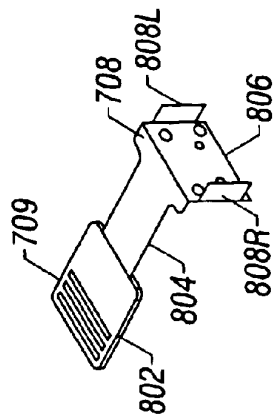


FIG. 8A




FIG. 8B




FIG. 8C

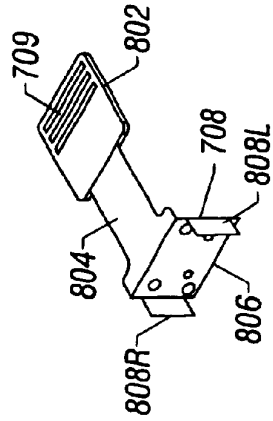


FIG. 8D

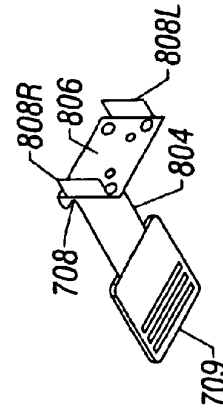


FIG. 8E

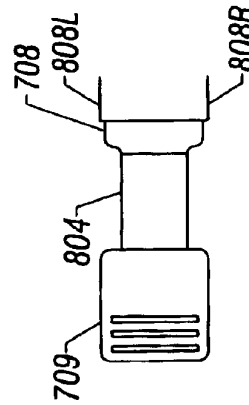


FIG. 8F

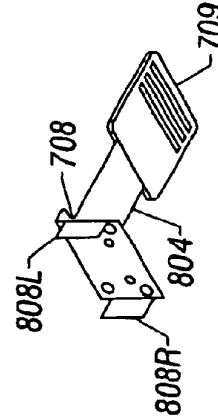


FIG. 8G

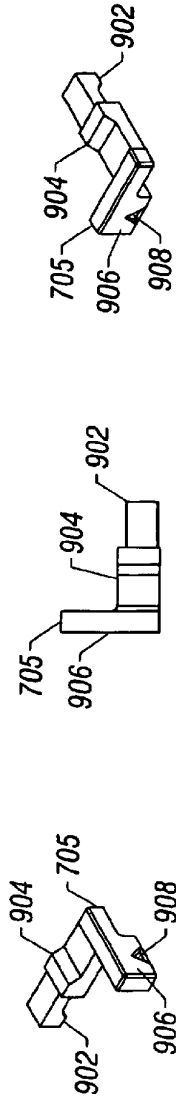


FIG. 9A




FIG. 9B




FIG. 9D




FIG. 9E




FIG. 9F




FIG. 9G




FIG. 9H




FIG. 9I




FIG. 9C

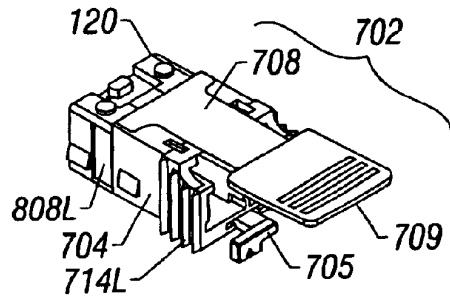


FIG. 10A

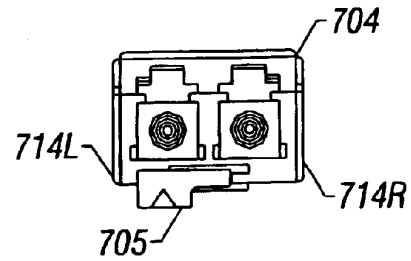


FIG. 10B

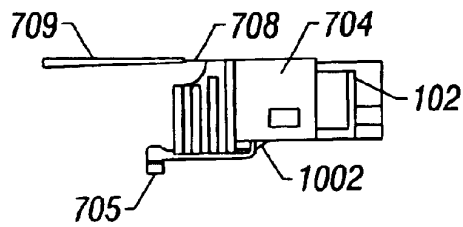


FIG. 10C

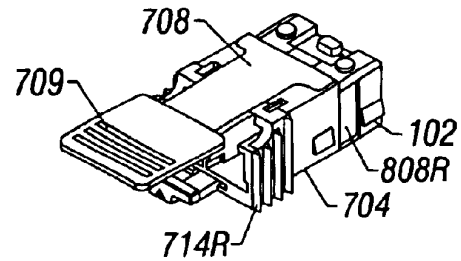


FIG. 10D

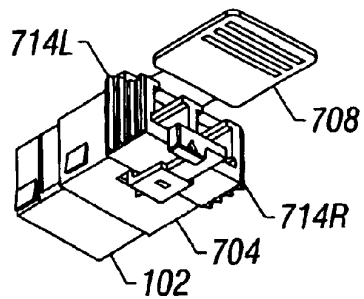


FIG. 10E

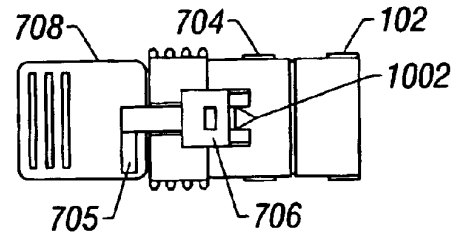


FIG. 10F

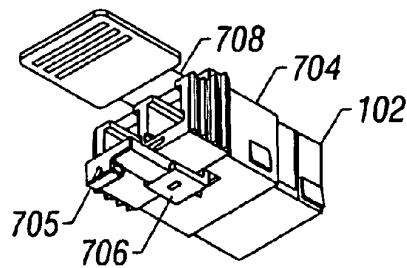


FIG. 10G

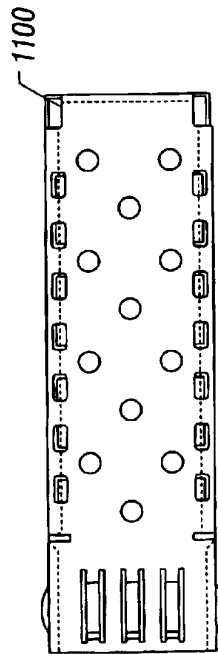


FIG. 11A

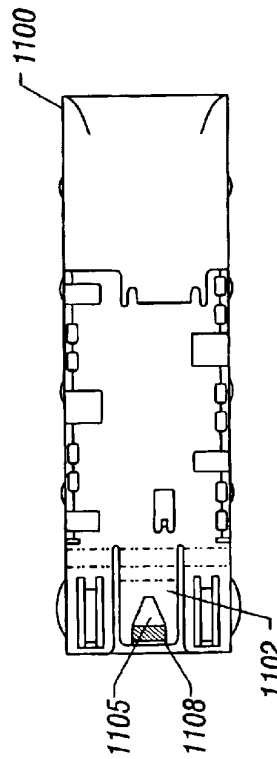


FIG. 11B

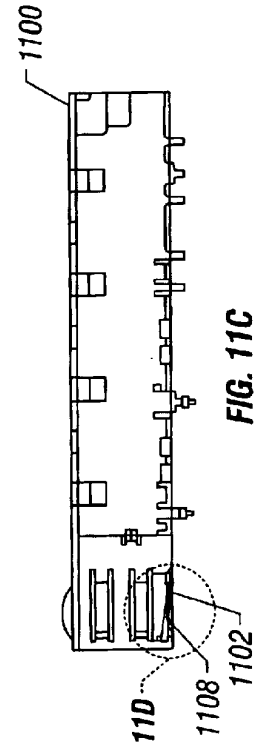


FIG. 11C




FIG. 11D


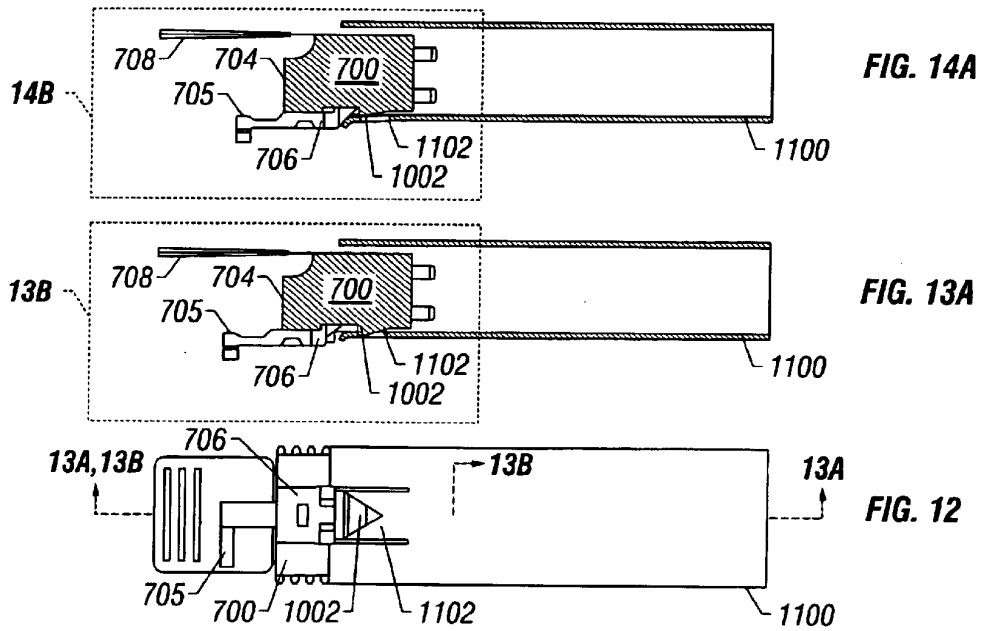


FIG. 11E



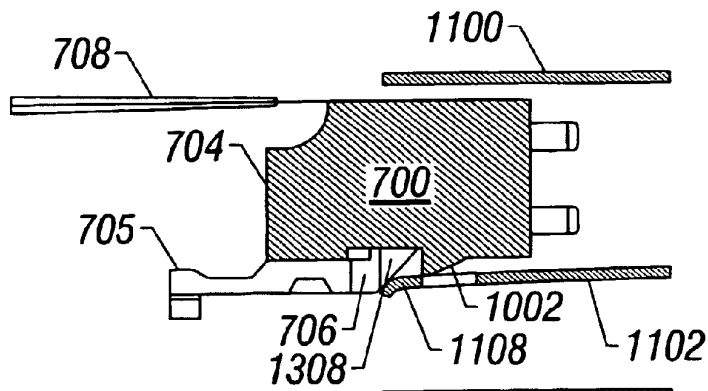


FIG. 14B

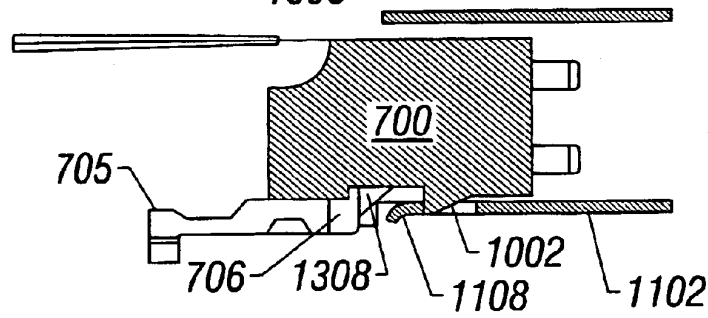


FIG. 13B

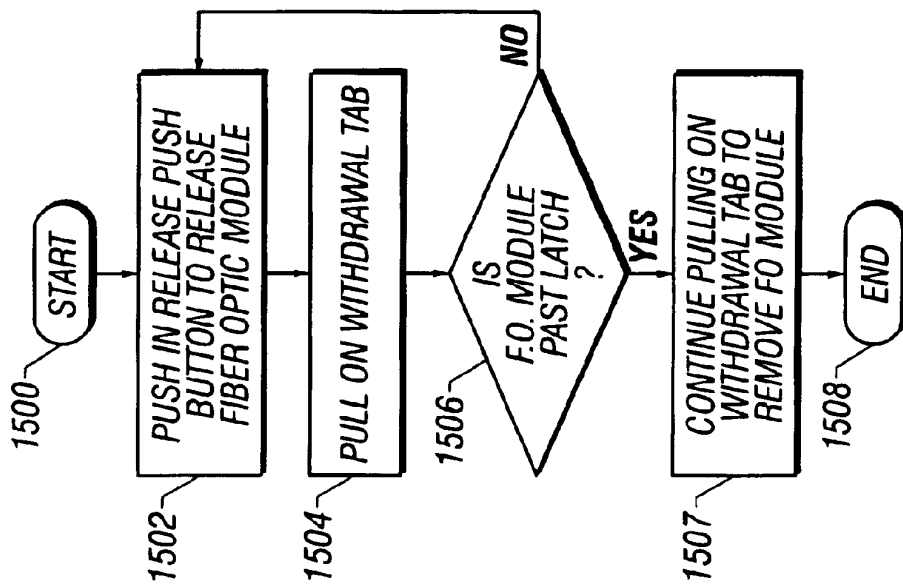


FIG. 15

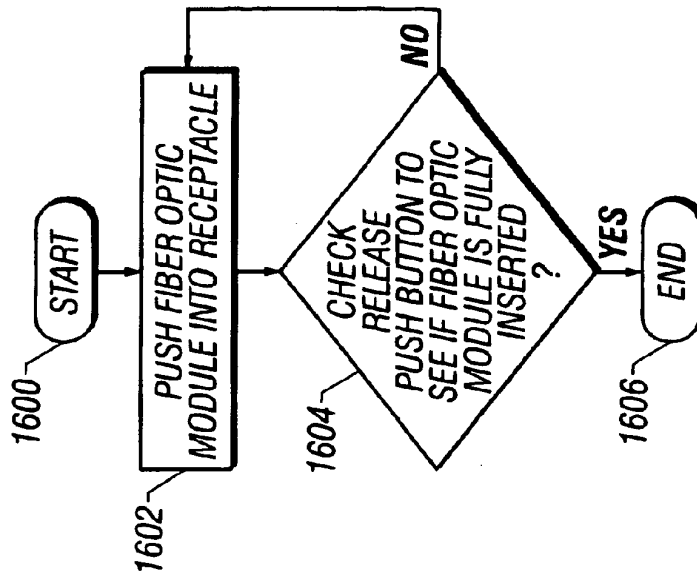


FIG. 16

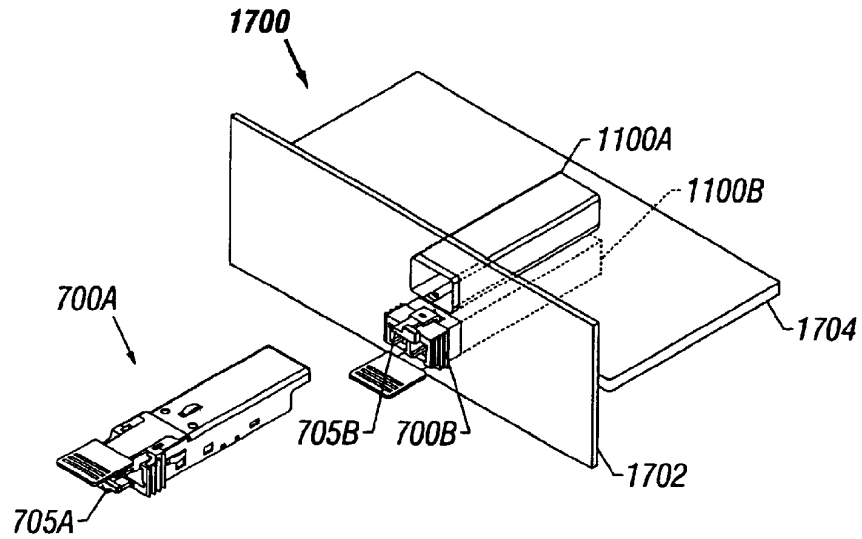


FIG. 17A

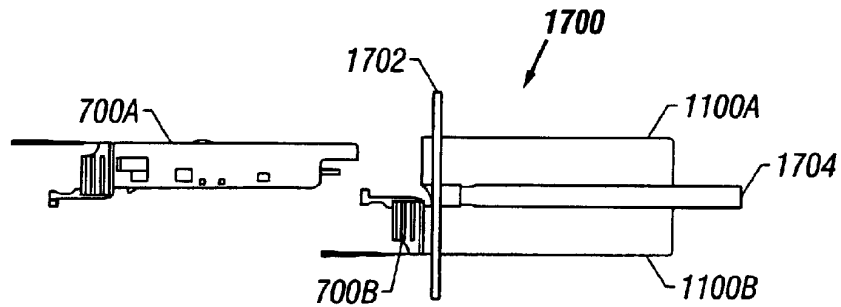


FIG. 17B

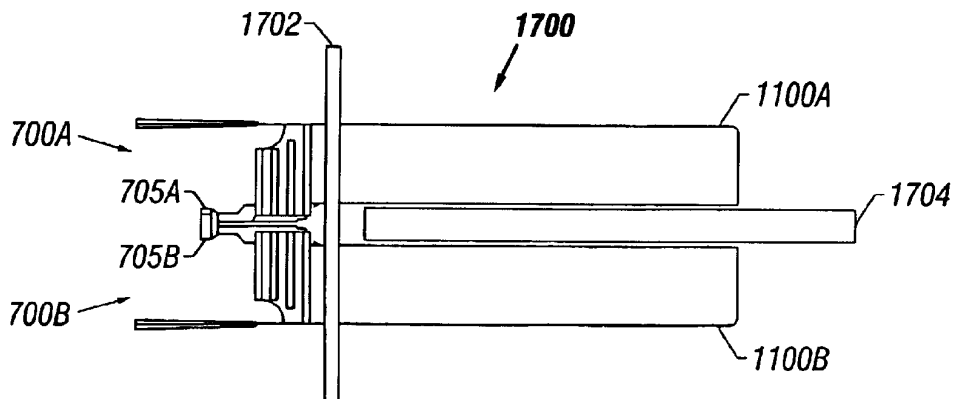


FIG. 17C

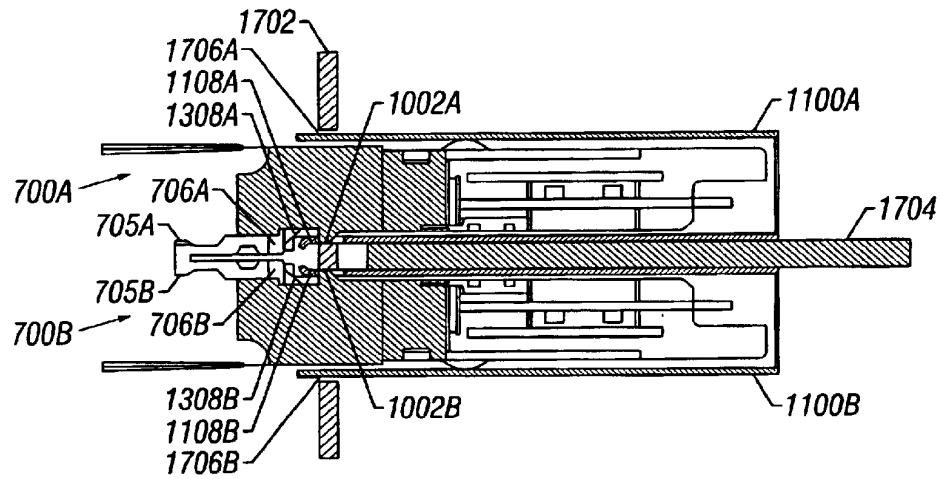


FIG. 17D

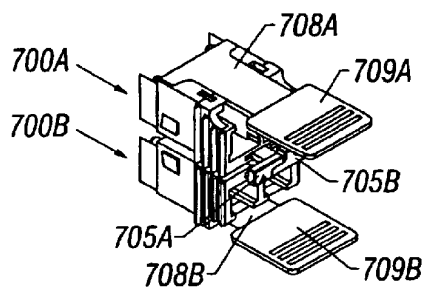


FIG. 18A

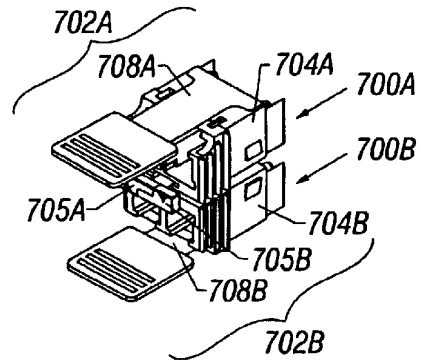


FIG. 18B

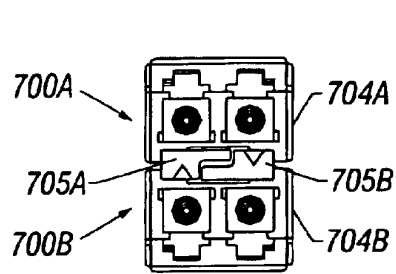


FIG. 18C

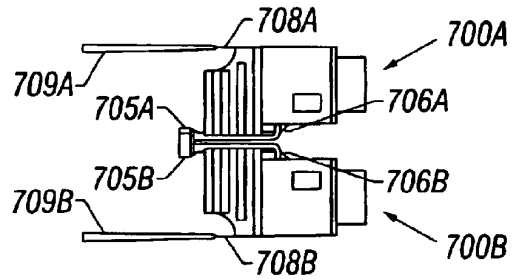


FIG. 18D




FIG. 19A




FIG. 19B




FIG. 19C




FIG. 19D




FIG. 19E




FIG. 19F

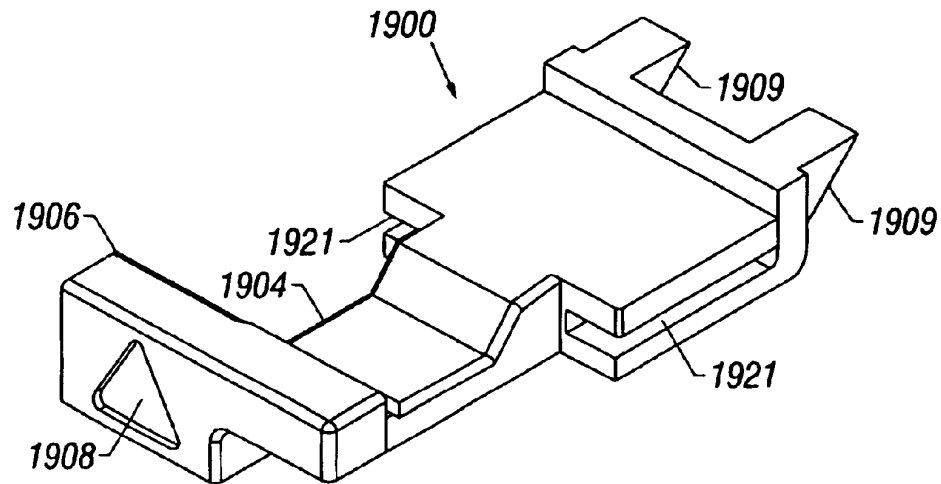


FIG. 20A

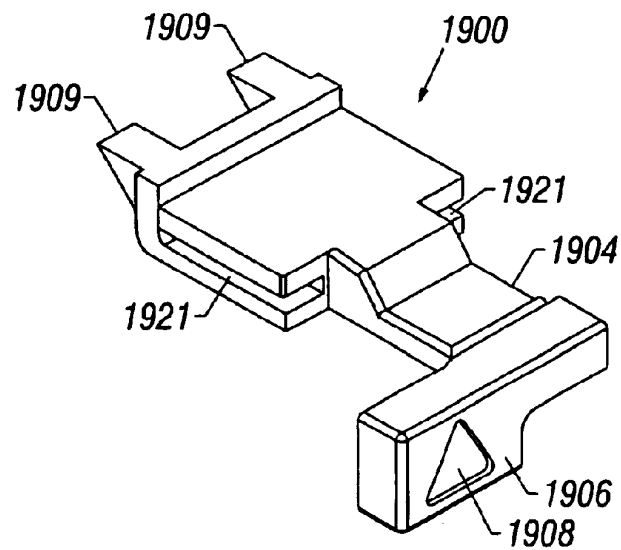


FIG. 20B

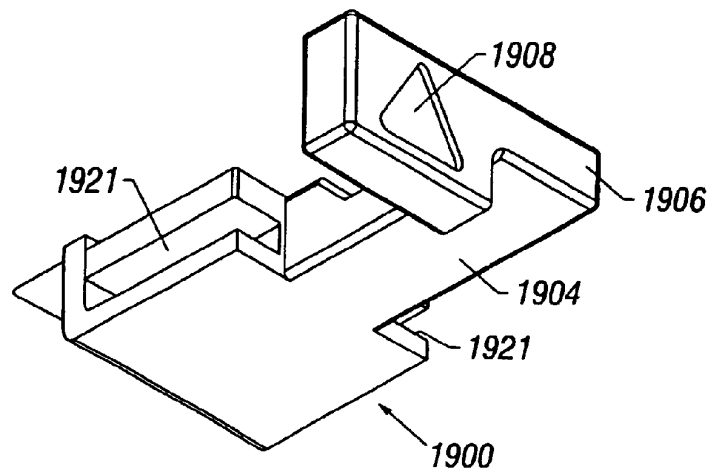


FIG. 20C

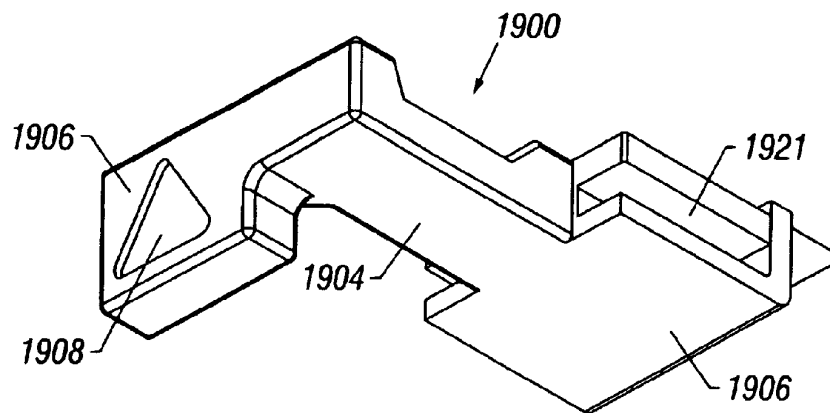


FIG. 20D




FIG. 21A




FIG. 21B




FIG. 21C




FIG. 21D




FIG. 22A




FIG. 22B

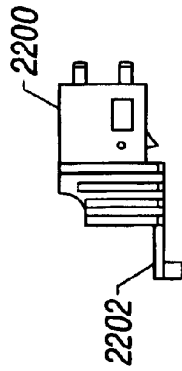


FIG. 22C

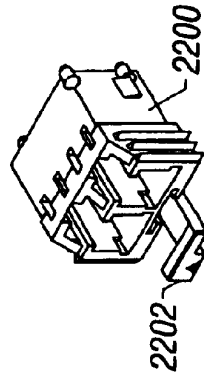


FIG. 22D

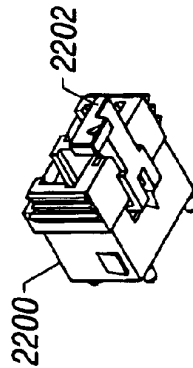


FIG. 22E

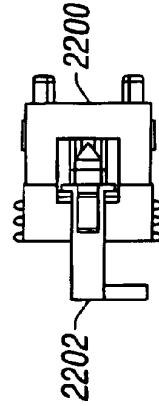


FIG. 22F

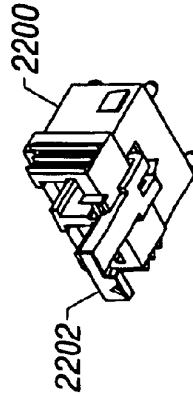


FIG. 22G

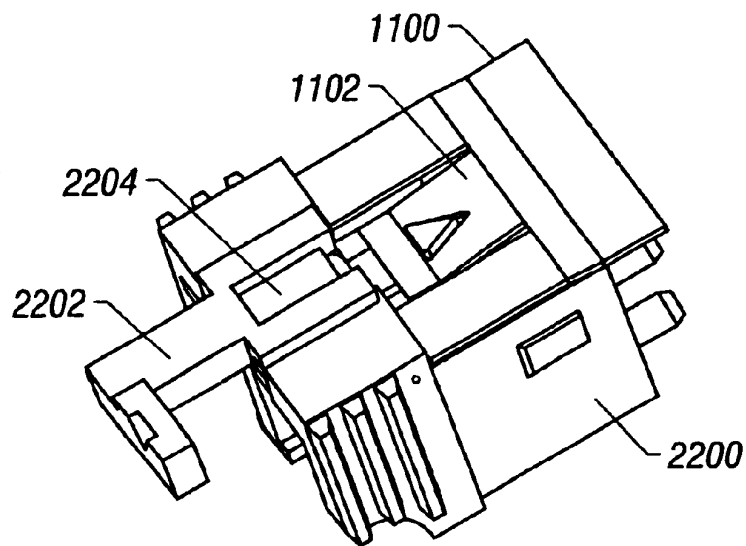


FIG. 22H

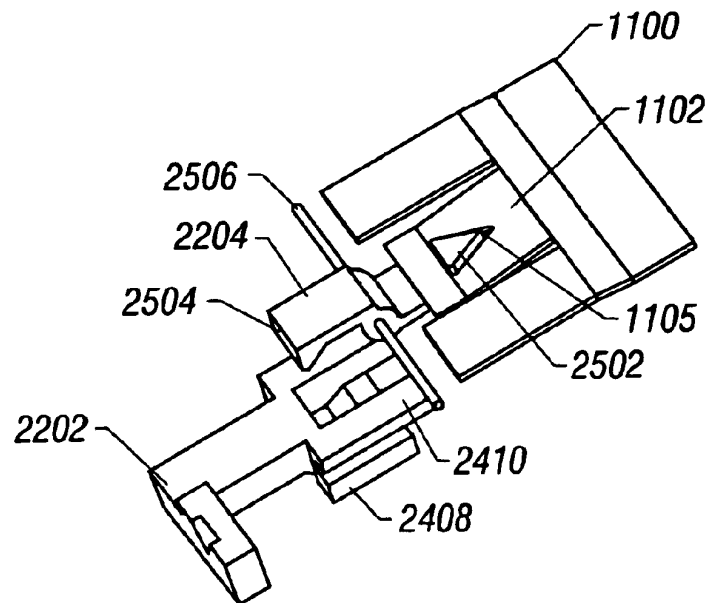


FIG. 23

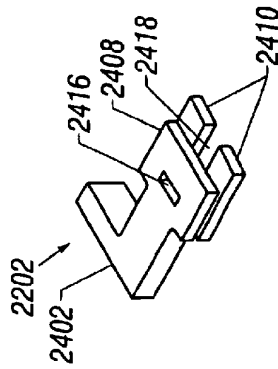


FIG. 24C

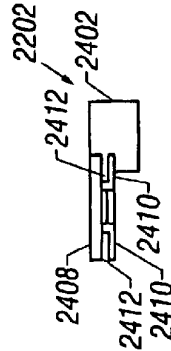


FIG. 24F




FIG. 24I

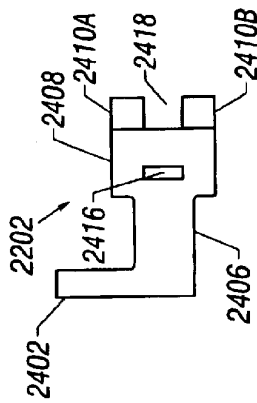


FIG. 24B

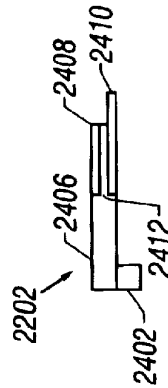


FIG. 24E

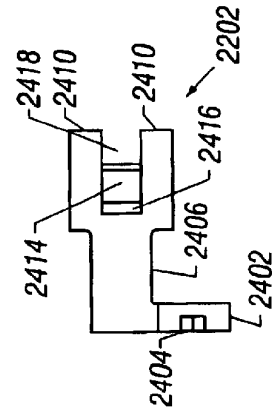


FIG. 24H

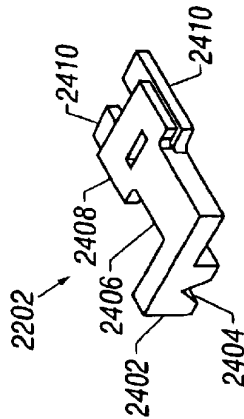


FIG. 24A

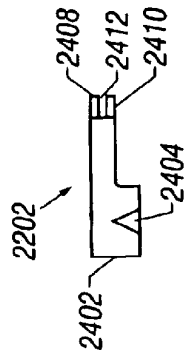


FIG. 24D

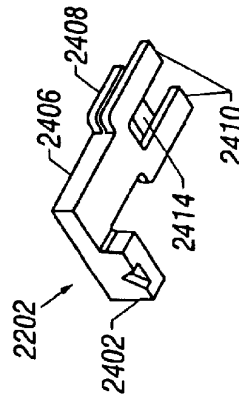


FIG. 24G




FIG. 25A




FIG. 25B




FIG. 25C




FIG. 25D




FIG. 25E




FIG. 25F




FIG. 25G




FIG. 25H




FIG. 25I

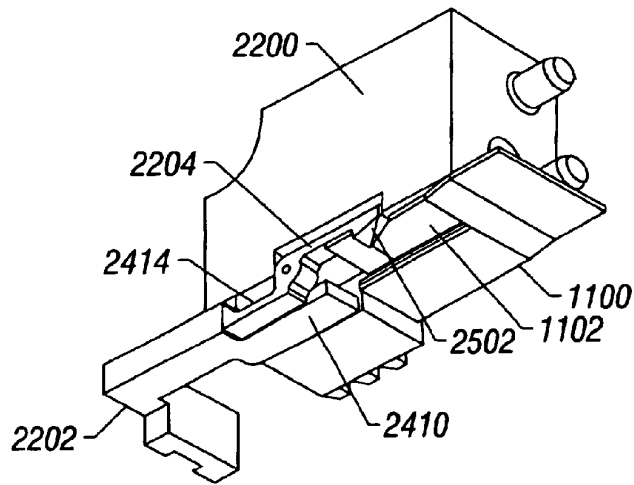


FIG. 26A

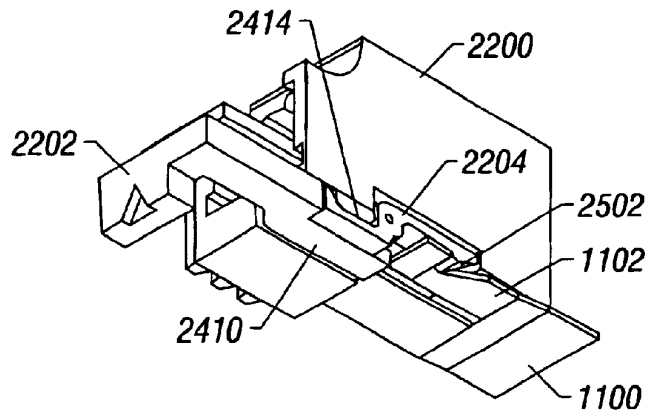


FIG. 26B

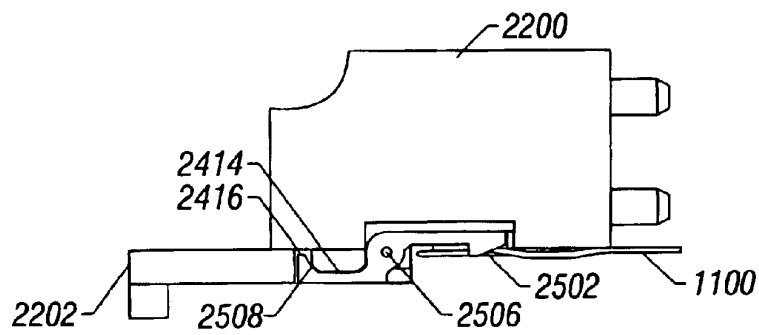


FIG. 26C

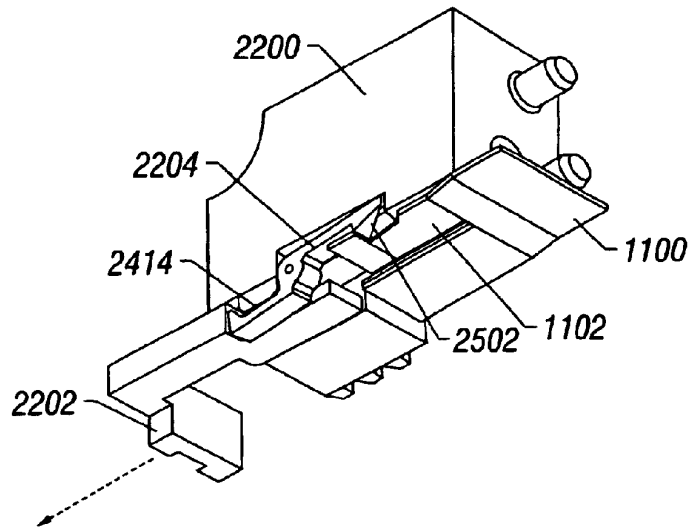


FIG. 27A

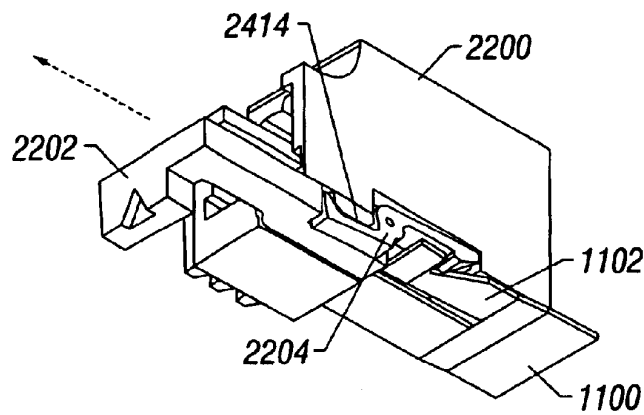


FIG. 27B

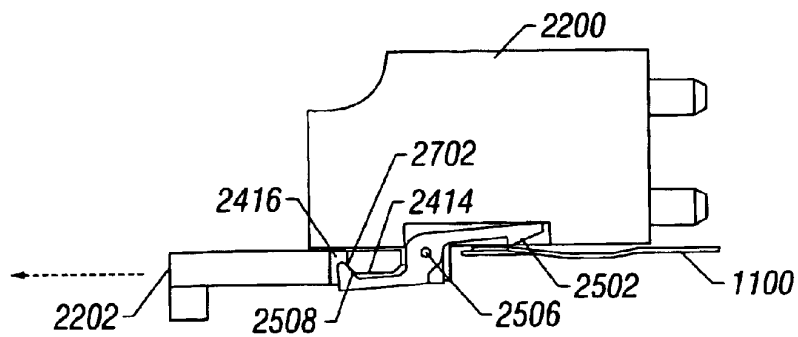


FIG. 27C




FIG. 28C

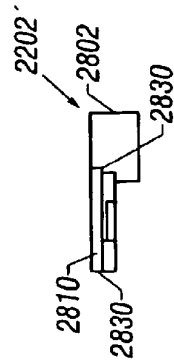


FIG. 28F




FIG. 28I

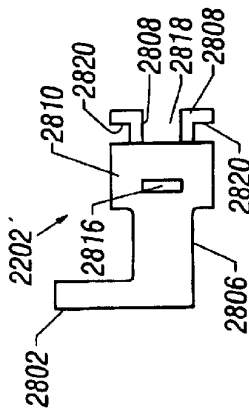


FIG. 28B

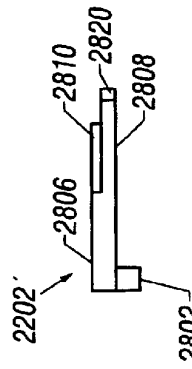


FIG. 28E

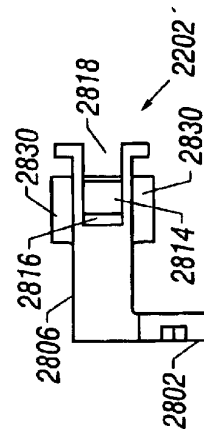


FIG. 28H

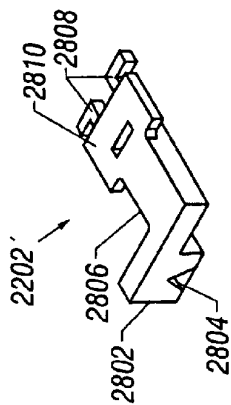


FIG. 28A




FIG. 28D

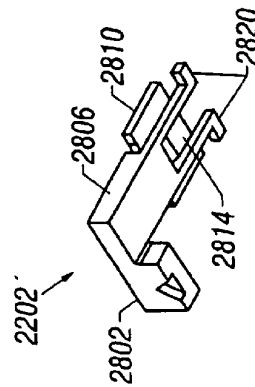


FIG. 28G




FIG. 29A




FIG. 29B




FIG. 29C




FIG. 29D




FIG. 29E




FIG. 29F




FIG. 29G




FIG. 29H




FIG. 29I

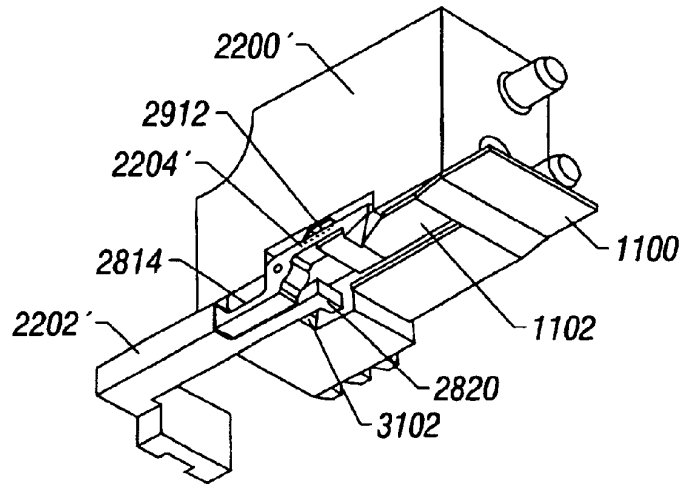


FIG. 30A

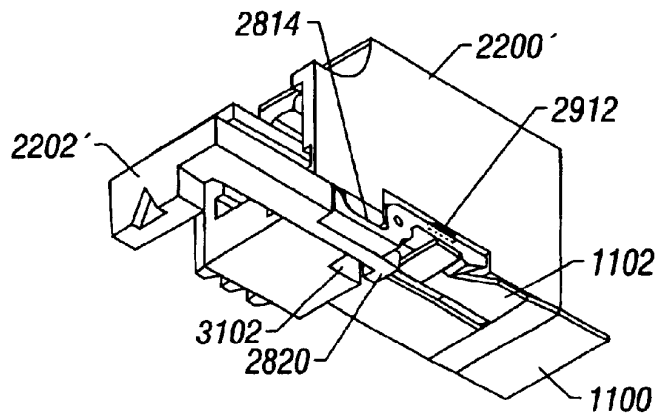


FIG. 30B

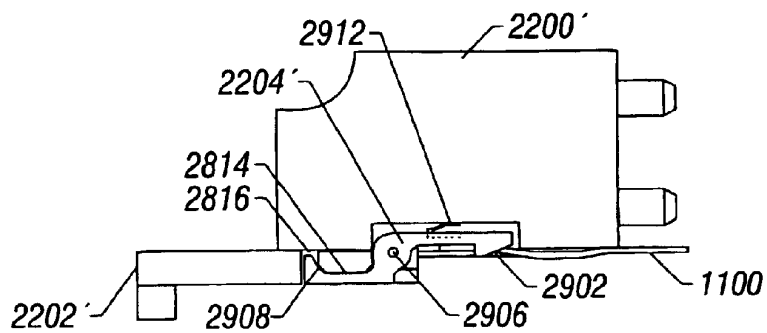


FIG. 30C

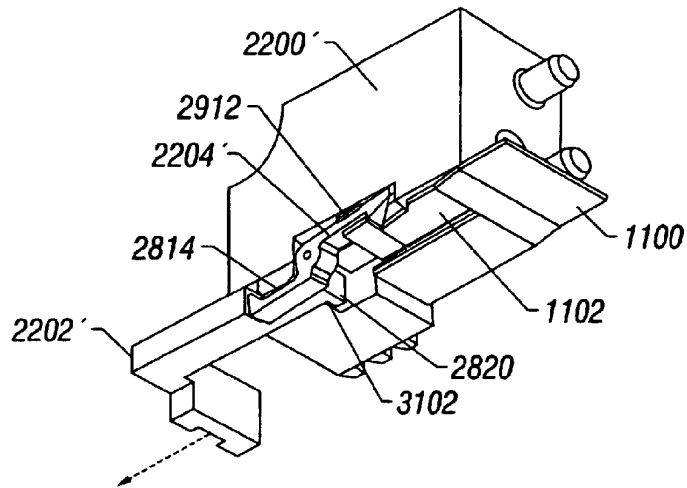


FIG. 31A

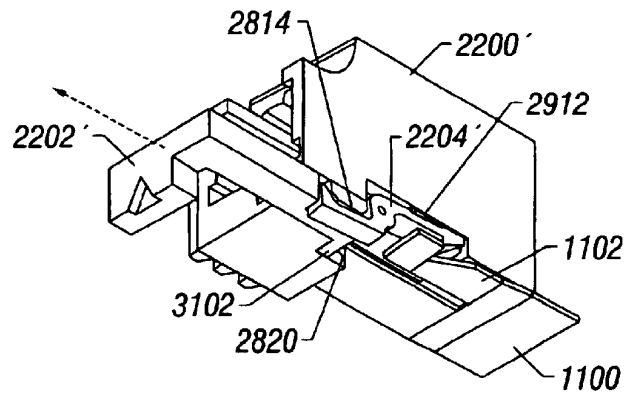


FIG. 31B

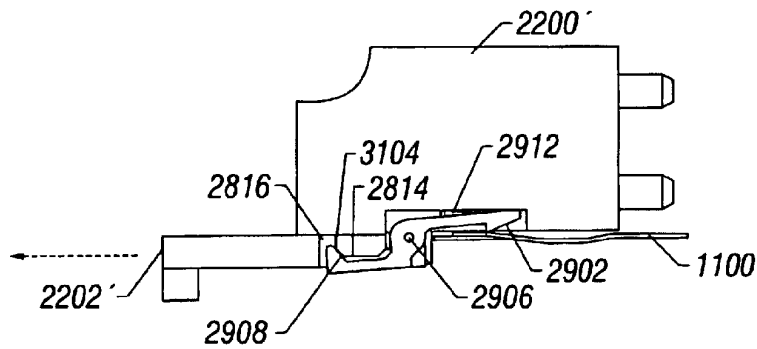


FIG. 31C

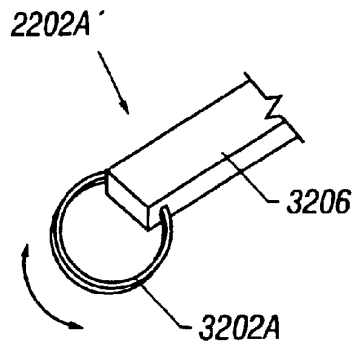


FIG. 32A

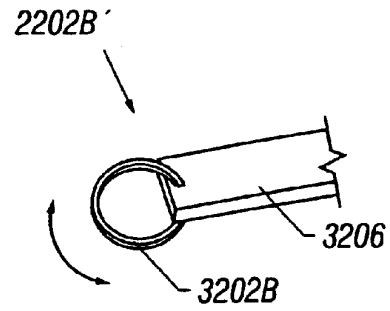


FIG. 32B

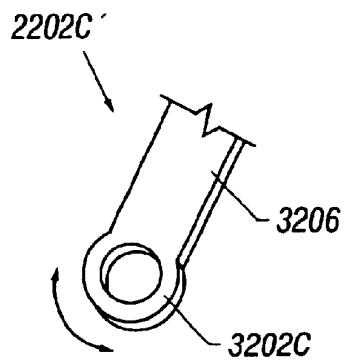


FIG. 32C




FIG. 32D

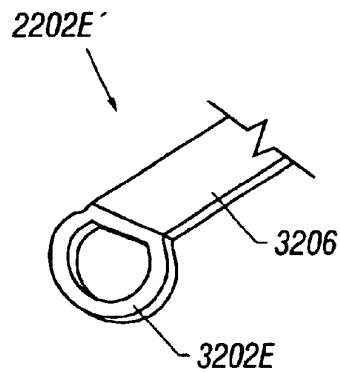


FIG. 32E




FIG. 32F




FIG. 32G




FIG. 32H




FIG. 32I

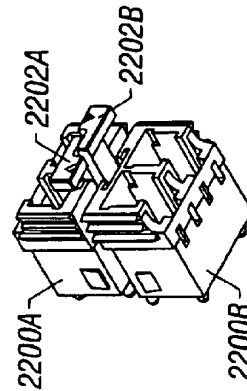


FIG. 33A

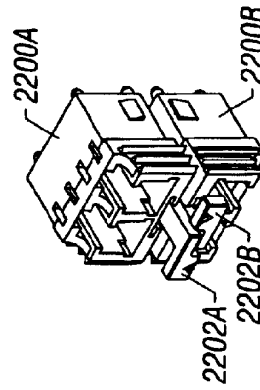


FIG. 33B

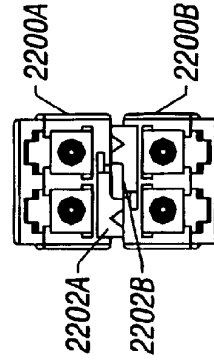


FIG. 33C

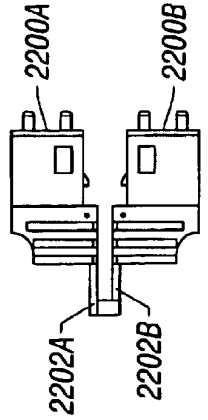


FIG. 33D

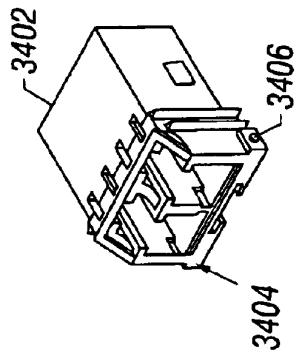


FIG. 34A




FIG. 34B

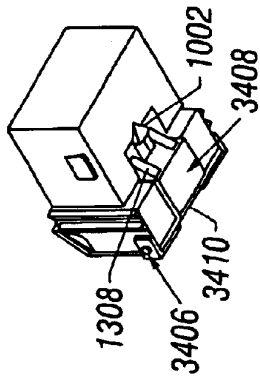


FIG. 34C




FIG. 34D




FIG. 34F

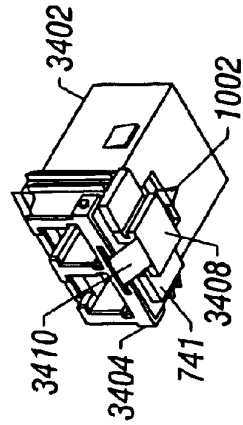


FIG. 34G

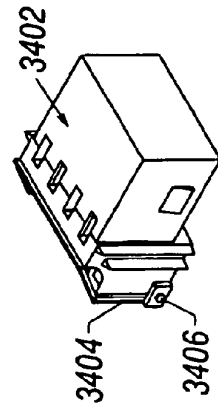


FIG. 34E




FIG. 34H

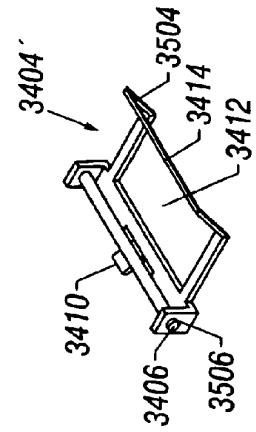


FIG. 35C

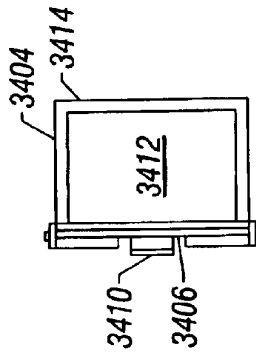


FIG. 35B

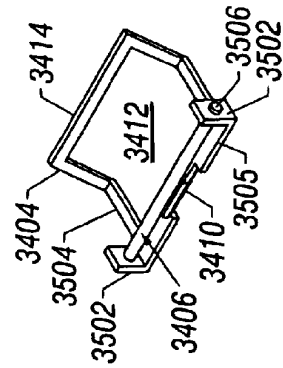


FIG. 35A




FIG. 34I

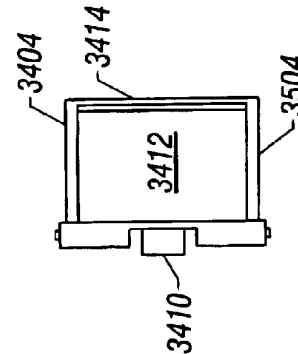


FIG. 35F




FIG. 35E




FIG. 35D

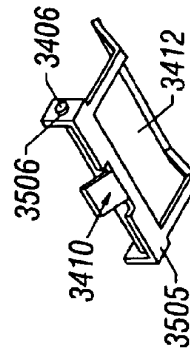


FIG. 35G

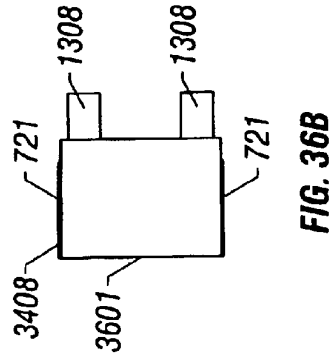


FIG. 36B




FIG. 36A




FIG. 35I




FIG. 35H

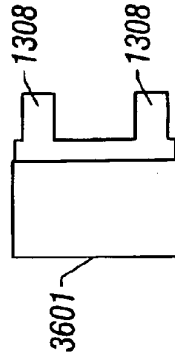


FIG. 36F

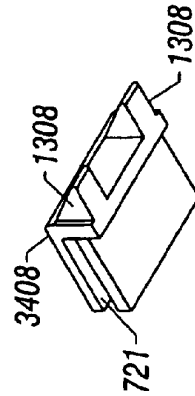


FIG. 36E




FIG. 36D

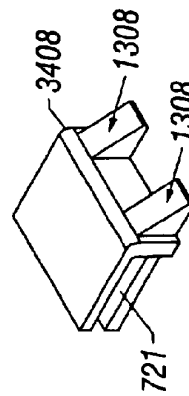


FIG. 36C




FIG. 36G




FIG. 36H




FIG. 36I

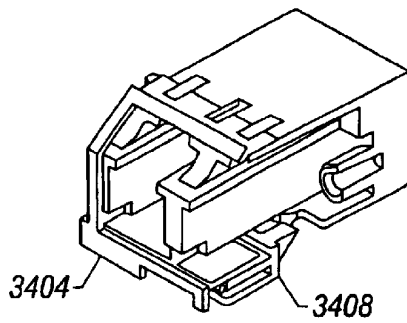


FIG. 37A

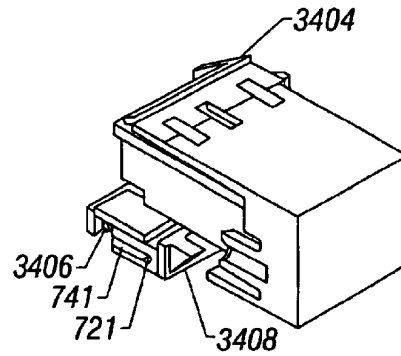


FIG. 37B

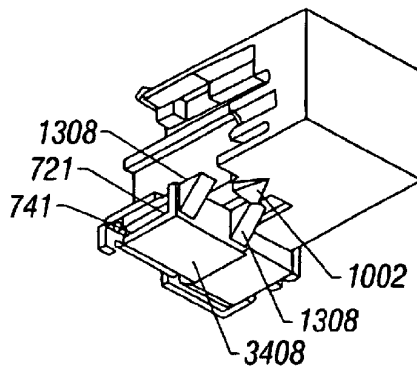


FIG. 37C

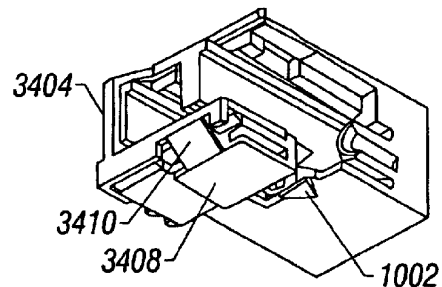


FIG. 37D

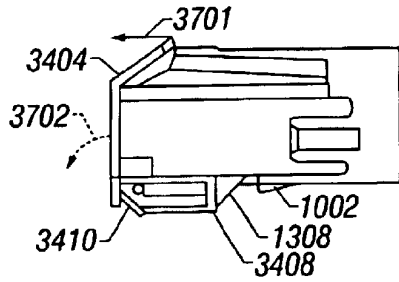


FIG. 37E

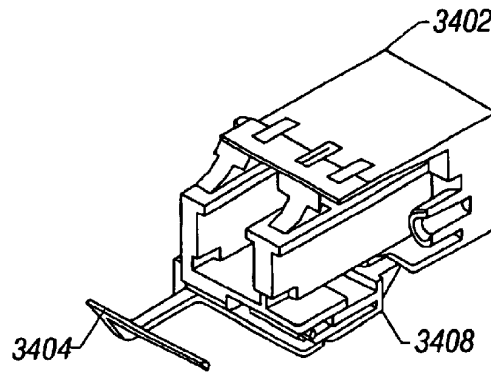


FIG. 38A

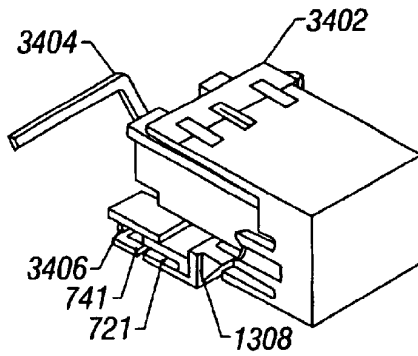


FIG. 38B

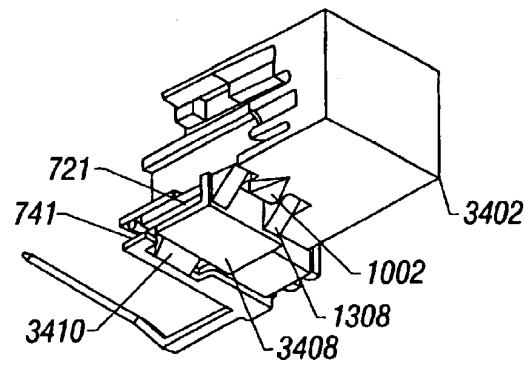


FIG. 38C

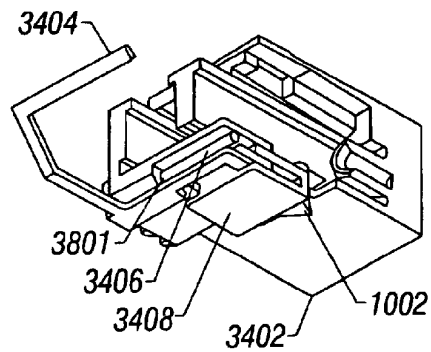


FIG. 38D

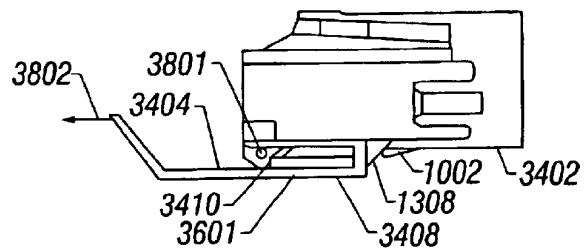
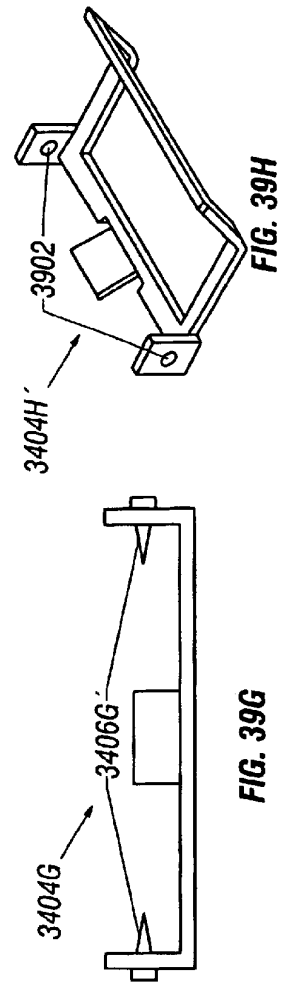
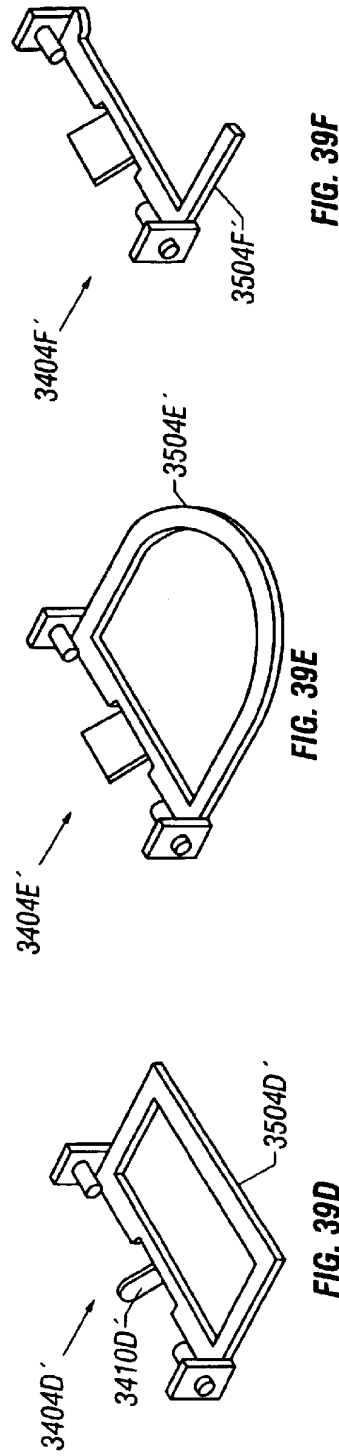
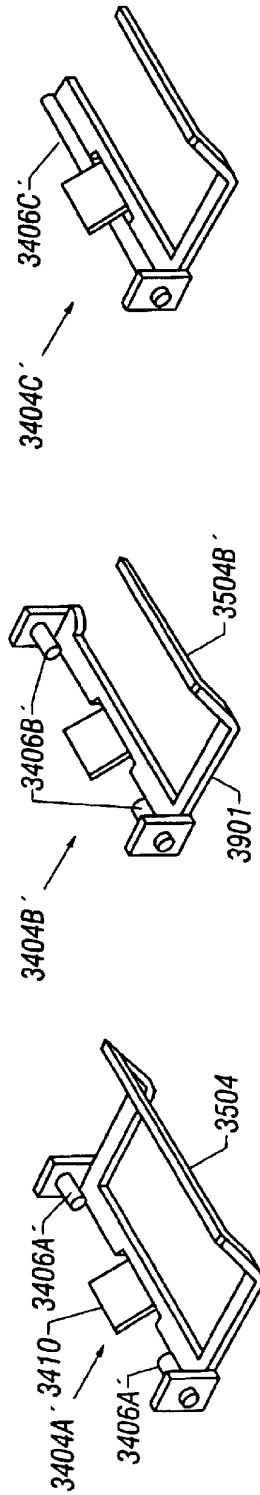


FIG. 38E



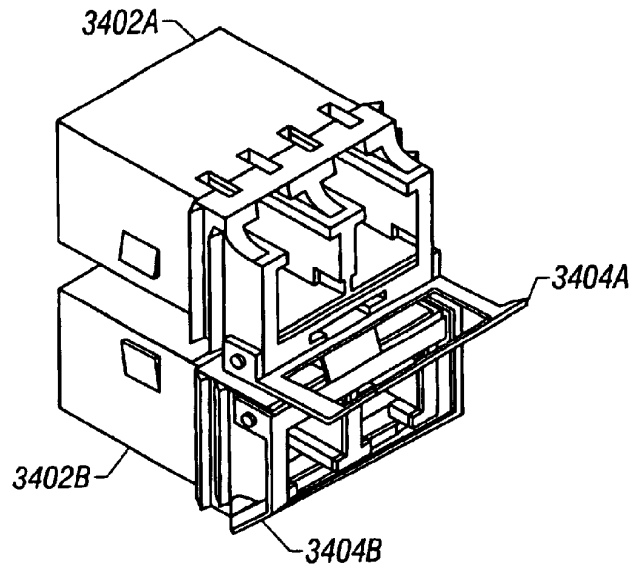


FIG. 40A

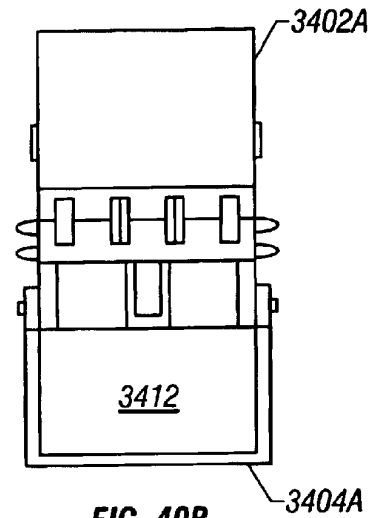


FIG. 40B

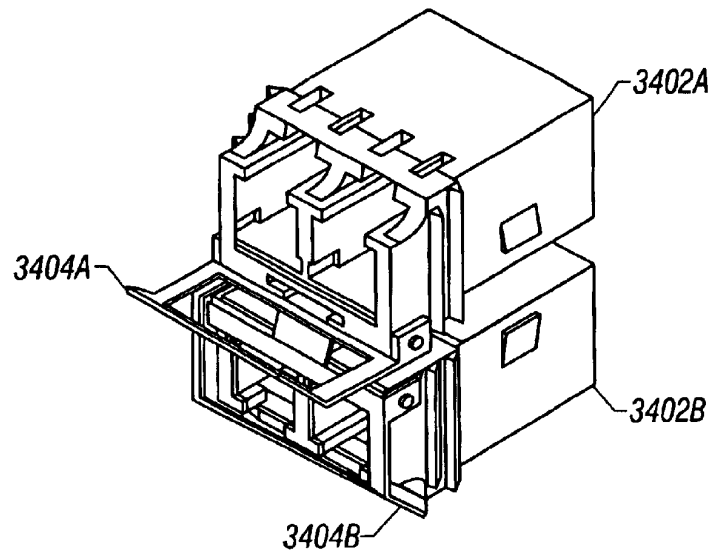


FIG. 40C

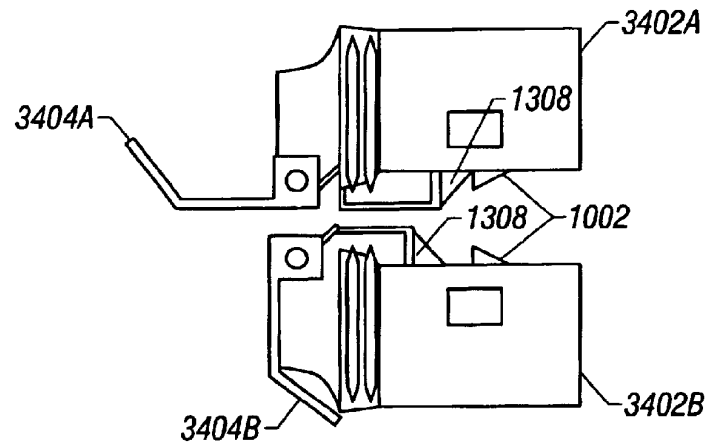


FIG. 40D

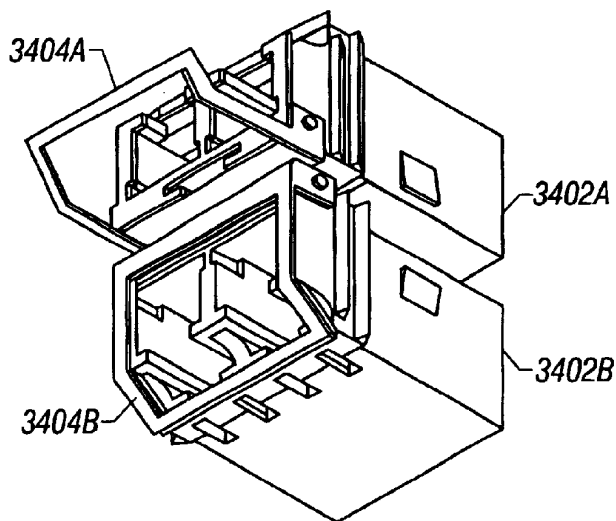


FIG. 40E

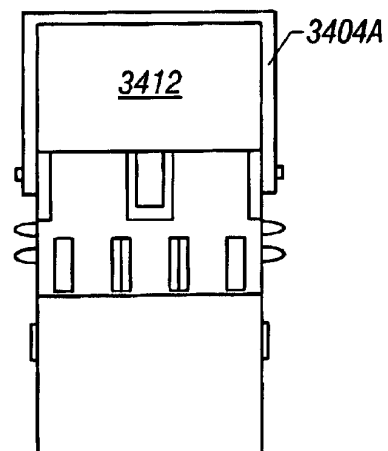


FIG. 40F

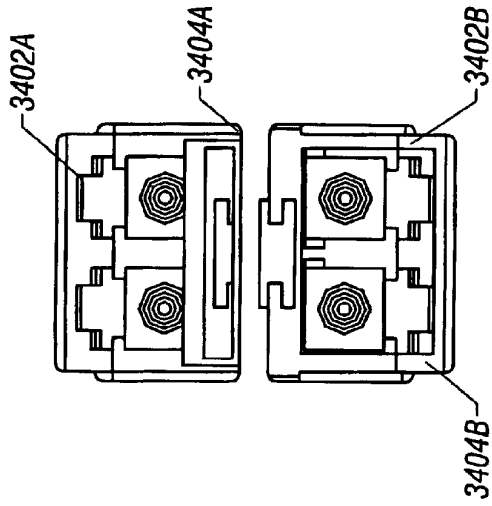


FIG. 40I

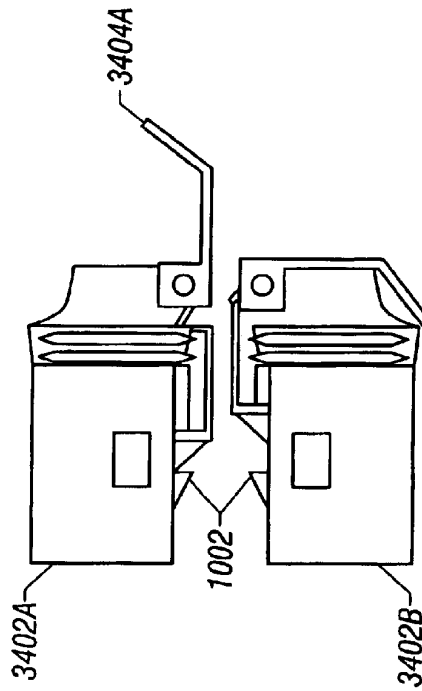


FIG. 40H

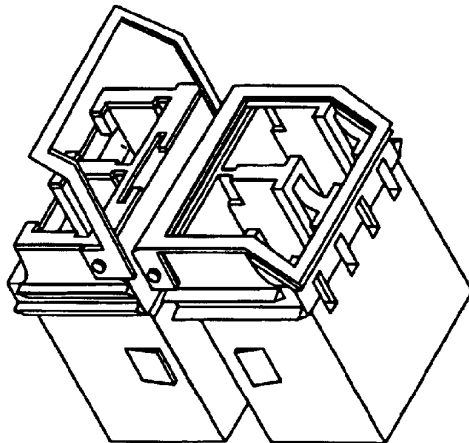


FIG. 40G

FIBER OPTIC MODULES WITH PULL-ACTION DE-LATCHING MECHANISMS

CROSS REFERENCE TO RELATED APPLICATIONS

This non-provisional United States (U.S.) patent application claims the benefit of U.S. Provisional Application No. 60/313,232 filed on Aug. 16, 2001 by inventors Liew Chuang Chiu et al., titled "DE-LATCHING MECHANISMS FOR FIBER OPTIC MODULES", and also claims the benefit of and is a continuation in part (CIP) of U.S. patent application Ser. No. 09/896,695, filed on Jun. 28, 2001 by inventors Liew Chuang Chiu et al., titled "METHOD AND APPARATUS FOR PUSH BUTTON RELEASE FIBER OPTIC MODULES", and also claims the benefit of U.S. Provisional Application No. 60/283,843 filed on Apr. 14, 2001 by inventors Liew Chuang Chiu et al. entitled "METHOD AND APPARATUS FOR PUSH BUTTON RELEASE FIBER OPTIC MODULES"; and is also related to U.S. patent application Ser. No. 09/939,403, filed on Aug. 23, 2001 by Liew C. Chiu et al., titled "DE-LATCHING MECHANISMS FOR FIBER OPTIC MODULES"; U.S. patent application Ser. No. 09/656,779, filed on Sep. 7, 2000 by Cheng Ping Wei et al.; U.S. patent application Ser. No. 09/321,308, filed on May 27, 1999 by Wenbin Jiang et al.; and U.S. patent application Ser. No. 09/320,409, filed on May 26, 1999 by Wenbin Jiang et al. now U.S. Pat. No. 6,213,651 B1, all of which are to be assigned to E2O Communications, Inc.

FIELD

This invention relates generally to fiber optic modules. More particularly, the invention relates to release mechanisms for unplugging fiber optic modules.

BACKGROUND

Fiber optic modules can transduce electrical data signals in order to transmit optical signals over optical fibers. Fiber optic modules can also transduce optical signals received over optical fibers into electrical data signals.

The size or form factor of fiber optic modules is important. The smaller the form factor of a fiber optic module, the less space taken on a printed circuit board to which it couples. A smaller form factor allows a greater number of fiber optic modules to be coupled onto a printed circuit board to support additional communication channels. However, the smaller form factor makes it more difficult for a user to handle.

When a fiber optic module embedded in a system fails it is desirable to replace it, particularly when other communication channels are supported by other operating fiber optic modules. To replace a failed fiber optic module it needs to be pluggable into a module receptacle. While plugging in a new fiber optic module is usually easy, it is more difficult to remove the failed fiber optic module because of other components surrounding it. Additionally, a user should not attempt to pull on fiber optic cables in order to try and remove a failed fiber optic module or else the user might cause damage thereto.

A typical release method for a pluggable fiber optic module is to push in on the fiber optic module itself and then pull out on the fiber optic module to release it from a cage assembly or module receptacle. It has been determined that this method is not very reliable with users complaining of the difficulty in removing pluggable fiber optic modules in this manner.

Users often complain that traditional methods offer little leverage in getting a sufficient grip on the module when attempting to pull it out of a module receptacle. Another complaint is that traditional actuators used to remove fiber optic modules are inaccessible or invisible. Other users complain that once released by the traditional method, it is difficult to withdraw the fiber optic module out of its cage or module receptacle.

Additionally, the pushing and then pulling of traditional methods places extra strain on components of the fiber optic module itself, the cage assembly or module receptacle and any electrical connections which the fiber optic module makes with an electrical connector. Oftentimes more than one cycle of pushing and pulling on the fiber optic module is required to release it from the cage or receptacle.

It is desirable to make it easier to remove pluggable fiber optic modules.

BRIEF DESCRIPTIONS OF THE DRAWINGS

FIG. 1 is a simplified top-exploded view illustrating an optical element.

FIG. 2 is a partially assembled view of an optical element, receiver printed circuit board, and transmitter printed circuit board.

FIG. 3 is an exploded view of a printed circuit board cage subassembly and optical element.

FIG. 4A is an exploded view from the rear of an embodiment of a hot pluggable fiber optic module.

FIG. 4B is a magnified view of a side of a male electrical connector to provide hot pluggability.

FIG. 4C is a magnified view of another side of the male electrical connector to provide hot pluggability.

FIG. 5 is exploded view from the front of an embodiment of a fiber optic module.

FIG. 6A is a top view of an embodiment of an assembled fiber optic module.

FIG. 6B is a bottom view of an embodiment of an assembled fiber optic module.

FIG. 6C is a right side view of an embodiment of an assembled fiber optic module.

FIG. 6D is a left side view of an embodiment of an assembled fiber optic module.

FIG. 6E is a front view of an embodiment of an assembled fiber optic module.

FIG. 6F is a rear view of an embodiment of an assembled fiber optic module.

FIGS. 7A-7D are views of a disassembled fiber optic module of embodiments of the invention.

FIGS. 7E-7F are perspective views of a disassembled fiber optic module of another embodiment of the invention illustrating an alternate embodiment of a withdrawal tab.

FIGS. 7G-7H are perspective views of a disassembled fiber optic module of another embodiment of the invention illustrating another alternate embodiment of a withdrawal tab.

FIGS. 8A-8G are various views of an embodiment of a withdrawal tab for fiber optic modules.

FIGS. 9A-9I are various views of an embodiment of a kicker-actuator for fiber optic modules.

FIGS. 10A-10G are views of a subassembly of the fiber optic modules of Figures 7A-7D illustrating the pull-actuator of FIGS. 8A-8G and the kicker-actuator of FIGS. 9A-9I assembled to the nose receptacle

FIGS. 11A–11E are views of an exemplary cage assembly or module receptacle for fiber optic modules.

FIG. 12 is a bottom view of a system of the push button releasable fiber optic module engaged with the exemplary cage assembly or module receptacle for FIGS. 11A–11E.

FIGS. 13A–13B are cross-section views of the system of FIG. 12 with the push button release in a latched or steady state.

FIGS. 14A–14B are cross-section views of the system of FIG. 12 with the push button release depressed and delatching the fiber optic module from the cage assembly or receptacle module.

FIG. 15 is a flow chart diagram of a method of releasing a fiber-optic module.

FIG. 16 is a flow chart diagram of a method of inserting a fiber-optic module.

FIG. 17A is a perspective view of a fiber optic system with a belly-to-belly mounting configuration with the top fiber optic module removed.

FIG. 17B is a side view of the fiber optic system with a belly-to-belly mounting configuration of FIG. 17A.

FIG. 17C is a side view of the fiber optic system with a belly-to-belly mounting configuration of FIG. 17A with the top fiber optic module inserted.

FIG. 17D is a cross-section view of the fiber optic system with a belly-to-belly mounting configuration of FIG. 17C with the top fiber optic module inserted.

FIGS. 18A–18D illustrate various views of a subassembly of a pair of fiber optic modules in a belly to belly mounting configuration.

FIGS. 19A–19F illustrate various views of an integrated push button actuator for another embodiment of the invention.

FIGS. 20A–20D illustrate various magnified views of the integrated push button actuator of FIGS. 19A–19F.

FIGS. 21A–21D illustrate various views of alternate push button embodiments for the actuators.

FIGS. 22A–22H illustrate various views of a subassembly of a nose receptacle and pull-actuator for another embodiment of the invention.

FIG. 23 illustrates a pull-actuator, pivot-arm actuator, and cage assembly latch for one embodiment of the invention.

FIGS. 24A–24I illustrate various views of a pull-actuator for one embodiment of the invention.

FIGS. 25A–25I illustrate various views of a pivot-arm actuator for one embodiment of the invention.

FIGS. 26A–26C illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 24A–24I and 25A–25I in the engaged position for one embodiment of the invention.

FIGS. 27A–27C illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 24A–24I and 25A–25I in the disengaged position for one embodiment of the invention.

FIGS. 28A–28I illustrate various views of a pull-actuator for another embodiment of the invention.

FIGS. 29A–29I illustrate various views of a pivot-arm actuator including a spring for another embodiment of the invention.

FIGS. 30A–30C illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 28A–I and 29A–I in the engaged position for one embodiment of the invention.

FIGS. 31A–31C illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 28A–I and 29A–I in the disengaged position for one embodiment of the invention.

FIGS. 32A–32I illustrate various views of alternative embodiments of pull mechanisms for pull-actuators.

FIGS. 33A–33D illustrate various views of a belly-to-belly mounting configuration for another embodiment of the invention employing pull-actuators.

FIGS. 34A–34I illustrate various views of a subassembly of a nose receptacle including a bail latch delatching mechanism for another embodiment of the invention.

FIGS. 35A–35I illustrate various views of a bail latch including a pivoting pin for one embodiment of the invention.

FIGS. 36A–36I illustrate various views of an actuator for one embodiment of the invention.

FIGS. 37A–37E illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 34A–34I in the engaged position for one embodiment of the invention.

FIGS. 38A–38E illustrate various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. 34A–34I in the disengaged position for one embodiment of the invention.

FIGS. 39A–39H illustrate various views of an alternate embodiments of the bail latch.

FIGS. 40A–40I illustrate various views of how the bail-latch delatching mechanism would function in a belly-to-belly mounting configuration for another embodiment of the invention.

DETAILED DESCRIPTION

In the following detailed description of the invention, numerous specific details are set forth in order to provide a thorough understanding of the invention. However, one skilled in the art would recognize that the invention may be practiced without these specific details. In other instances well known methods, procedures, components, and circuits have not been described in detail so as not to unnecessarily obscure aspects of the invention.

In the following description, certain terminology is used to describe various features of the invention. For example, a “fiber-optic transceiver” is a fiber optic module having optical signal transmit and receive capability. The terms “disengage”, “release”, “unlock”, and “de-latch” may be used interchangeably when referring to the de-coupling of a fiber optic module from a cage assembly.

The invention includes methods, apparatuses and systems for fiber optic modules including pull-action releasable fiber optic modules in small form pluggable (SFP) GBIC, LC type packages.

Referring now to FIG. 1, an exploded view of an optical element 103 of an embodiment of the invention is illustrated. The optical element 103 included a nose 151, a pair of fiber ferrule sleeves 131, an electromagnetic interference (EMI) shield plate 153, an optical block 120, a receiver 111 and a transmitter 110. The electromagnetic interference shield plate 153 provides shielding to keep electromagnetic interference from leaking into or out of the optical block 120 and the module. The optical block 120 aligns a light transmitter 110 and a light receiver 111 with two lenses in the optical block 120. The light transmitters 110 or light receivers 111 are optoelectronic devices for communicating with optical fibers using light of various wavelengths or photons. An

5

optoelectronic device is a device which can convert or transduce light or photons into an electrical signal or an electrical signal into light or photons. In the case of transmitters, the light transmitters **110** are packaged emitters that can convert electrical signals into light or photons. Examples of emitters are semiconductor lasers (i.e. a VCSEL) or an LED which may be packaged in TO (transistor outline) cans. In the case of receivers, the light receivers **111** are packaged photodetectors, that detect or receive light or photons and convert it into an electrical signal. An example of a photo detector is a photo diode which may be packaged in a TO can. However other packages, housings or optoelectronic devices for receiving and transmitting light or photons may be used for the light transmitters **110** or light receivers **111**.

The electromagnetic interference plate **153** has one or more projections **156** which engage one or more external notches **157** of the optical block **120** near its edges. The optical ports **159** of the electromagnetic interference plate **153** align with a pair of optical ports **129** and **130** of the nose **151**. The electromagnetic interference plate **153** is electrically coupled to an outer housing **400** (shown on FIG. **5**) via the projections **156** and shunts electro-magnetic fields to the outer housing **400**. The fiber ferules **131** can be inserted into the optical ports **129** and **130** upon assembly. The nose **151** further has one or more posts **164** over which one or more holes **158** in the electromagnetic interference plate **153** can slide in order to align the nose **151**, the pair of fiber ferules **131**, the electromagnetic interference plate **153** and the optical block **120** together.

The nose **151** has a pair of LC receptacles **161** for mechanically coupling and aligning a pair of fiber optic cables (not shown) into the fiber optic module **100**. Each LC receptacle **161** is a fiber optic receptacle for one serial fiber optic channel. The LC receptacles **161** in the nose **151** are preferably located without spacing between each other. Neighboring channels are separated far enough apart that a fiber optic module **100** having multiple channels can comply with FDA and IEC Class-1 eye safety limits. This eases handling of the fiber optic module **100** by avoiding the use of eye protection.

Due to the size of LC receptacles, TO-can size packages are usable which allows the output power level of each individual fiber optic channel to be separately monitored. Monitoring a fiber optic channel involves splitting the light beam so that a photodetector or photodiode receives a portion of the light beam. The electrical output of the photodiode is then measured to indicate the output power level of the fiber optic channel. The relaxed spacing of the individual fiber optic receptacles of the invention facilitate placing light beam splitters within the TO can of the light transmitter **110**. The light beam splitter splits the beam such that a portion of the light beam lands on a photodiode within the TO can. The photodiode's output is measured to monitor the output power of the transmitter. Thus, with each channel being separately monitored for power output, each channel can be individually optimized. Those skilled in the art will also recognize that other fiber optic connectors such as, but not limited to, SC, MT-RJ, VF45, and MU connectors, may be used in lieu of the LC receptacles **161**.

Referring now to FIG. **2**, a partially assembled view of an optical element **103**, a receiver printed circuit board **250**, and a transmitter printed circuit board **200** for an embodiment of the invention is illustrated. Receiver printed circuit board **250** includes one or more receiver electrical components **227** (receiver integrated circuit (transimpedance amplifier and post amplifier), resistors, capacitors and other passive or

6

active electrical components), a male electrical connector **235**, and a receiver ground plane **213** (not shown). The transmitter printed circuit board **200** includes one or more transmitter electrical components **229** (transmitter integrated circuit (laser driver), resistors, capacitors and other passive or active electrical components) and a transmitter ground plane **215** (not shown). The receiver printed circuit board **250** and the transmitter printed circuit board **200** may be assembled by wave soldering.

At least one pin of the male electrical connector **235** couples to an external female electrical connector. The external female electrical connectors may be SFP (Small Form Pluggable) SMT (Surface Mount Technology) connectors. One or more pins of the male electrical connector **235** allow electrical signals, power, and ground to be coupled into or out of the fiber optic module **100**.

Referring now to FIG. **3**, an exploded view of the optical element **103**, the receiver printed circuit board **250**, the transmitter printed circuit board **200**, a bottom frame **301**, and a top frame **303** is illustrated. One or more transmitter pins **243** of the male electrical connector **235** which couple to the transmitter electrical components **229**, the transmitter electrical components **229**, the light transmitter **110**, the interconnect leads **225** and a lens (not shown) of the optical block form one transmitting channel. The transmitter electrical components **229** control the light transmitter **110** and buffer the data signal received from a system for transmission over an optical fiber. One or more receiver pins **245** of the male electrical connector **235** which couple to the receiver electrical components **227**, the receiver electrical components **227**, the light receiver **111** and a lens (not shown) of the optical block form one receiving channel. The receiver electrical components **227** control the light receiver **111** and buffer the data signal received from an optical fiber. Other combinations of components can form other combinations of communications channels.

The optical element **103** includes the light receiver **111** with a plurality of straddle mount signal leads **201**. The Straddle mount signal leads **201** are arranged in two horizontal rows to straddle a printed circuit board. The two rows of straddle mount signal leads **201** sandwich the receiver printed circuit board **250** so that the straddle mount signal leads **201** electrically couple the light receiver **111** to a plurality of receiver contacts **203** on both sides of the receiver printed circuit board **250**. To improve the coupling between the straddle mount signal lead **201** and the receiver contacts **203**, solder may be applied to the straddle mount signal leads **201** and the receiver contacts **203**. The receiver contacts **203** are preferably a metal such as copper, silver, gold or other metal or alloy. The receiver contacts **203** may be on one or both the top and bottom surfaces of the receiver printed circuit board **250**.

Optical element **103** has a light transmitter **110** with a plurality of formed (i.e. bent) signal leads **205**. Each formed signal lead **205** is bent and turned up to couple to a header signal via **207**, in the printed circuit board. The printed circuit board **250** has a cutout **209** that allows space for a horizontal portion of the formed signal lead **205**. The cutout **209** may be at an angle cutting out a corner of receiver printed circuit board **250**. In the alternative, the cutout **209** may be a square, semicircle, quarter circle or other shape. The vertical portion of each formed signal lead **205** is long enough to couple the light transmitter **110** to the transmitter printed circuit board **200**.

The ends of formed signal leads **205** couple to a plurality of vias **207**, through-holes, contacts or other coupling

devices on the transmitter printed circuit board **200**. To improve the coupling between a formed signal lead **205** and a via **207**, solder may be applied to the formed signal lead **205** and the via **207**. Since the printed circuit board assemblies and optical elements are mechanically coupled after the printed circuit boards have been wave soldered, the optical elements are not subject to the heat generated by wave soldering. While a 90 degree angle has been described, it is understood that other arrangements of the formed signal leads **205** may be employed to couple the light transmitter **110** to the transmitter printed circuit board **200**.

When assembled into the fiber optic module, the receiver printed circuit board **250** and the transmitter printed circuit board **200** are vertically stacked and substantially parallel to each other. The top frame **303** and the bottom frame **301** hold the receiver printed circuit board **250** and the transmitter printed circuit board **200** in fixed vertical and horizontal alignment.

The fiber optic module further includes one or more interconnect leads **225** which electrically couple the transmitter electrical components **229** on the transmitter printed circuit board **200** to transmitter pins **243** of the electrical connector by means of signal traces in the receiver printed circuit board **250**.

The receiver printed circuit board **250** includes a receiver ground plane **213** (shown in FIG. 2), and the transmitter printed circuit board **200** includes a transmitter ground plane **215** (shown in FIG. 2). Receiver ground plane **213** shunts electromagnetic fields radiating into it to ground via a pin in the male electrical connector **235**. The transmitter ground plane **215** shunts electro-magnetic fields radiating into ground through one or more of the interconnect leads **225**, a transmitter trace **247** on the receiver printed circuit board **250**, and a pin **243** in the male electrical connector **235**.

The receiver printed circuit board **250** includes a pair of slots **231** (referred to as receiver slots **231**) one in the left side edge and another in the right side edge of the printed circuit board as shown and illustrated in FIG. 2. The transmitter printed circuit board **200** includes a pair of slots **233** (referred to as transmitter slots **233**) one in the left side edge and another in the right side edge of the printed circuit board as shown and illustrated in FIG. 2. The receiver slots **231** and the transmitter slots **233** facilitate alignment between the receiver printed circuit board **250** and the transmitter printed circuit board **200**.

The bottom frame **301** includes a pair of sides **341A** and **341B**, a base **343**, a pair of rails **305A** and **305B**, a plurality of lower support tabs **335** and a plurality of upper support tabs **337** extending from a pair of corners of each of the sides **341A** and **341B** as illustrated in FIG. 3. The base **343** of the bottom frame **301** is L shaped such that the rail **305B** extends along the side and base of the bottom frame **301** while the rail **305A** extends out of a center line (near the middle of the bottom frame) with a surface of the base there-between. The L shape leaves a cutout area from the base of the bottom frame which will be filled in by a bottom cover as described below. The rail **305A** extending from the center line or middle of the bottom frame **301**, includes a tip **355A** that extends outward and is inserted into an opening **155** in the optical block **120**.

The top frame **303** includes a top **347**, a pair of top frame sides **349A** and **349B**, a pair of alignment rails **307**, and a flange **321** as shown and illustrated in FIG. 3.

When assembled, the receiver printed circuit board **250** is inserted into a pair of slots **309** between the upper support tabs and the lower support tabs and rests on the lower

support tabs **335** of the bottom frame **301**. A pair of receiver slots **231** in edges of the receiver printed circuit board **250** are located near corners of the sides **341A** and **341B** of the receiver printed circuit board. The four lower support tabs **335** and the four upper support tabs **337** restrict vertical movement in the receiver printed circuit board **250** when its engaged thereto. One or more of the elements of the bottom frame **301** may be formed of a conductive material such as a metal or formed to include a conductive plating or surface. The conductive material of the bottom frame **301** shunts electromagnetic fields to ground via an electrical coupling to chassis ground. In this manner the bottom frame **301** can provide electromagnetic interference shielding for the fiber optic module.

When assembled, the transmitter printed circuit board **200** rests on the four upper support tabs **337** of the bottom frame **301** such that the pair of transmitter slots **233** in the transmitter printed circuit board **200** are aligned directly above the pair of receiver slots **231** in the receiver printed circuit board **250** at a position adjacent to and above the upper support tabs **337**. The alignment of the slots **233** with the slots **231** in each of the respective printed circuit boards assures that the transmitter interconnect vias **239** align with the receiver interconnect vias **241** such that the one or more interconnect leads **225** can be coupled there-between. The one or more interconnect leads **225** couple the respective transmitter traces **247** in the transmitter printed circuit board **200** and the receiver printed circuit board **250** together. The interconnect leads **225** are soldered to the receiver printed circuit board **250** at the receiver interconnect vias **241** on one end and to the transmitter printed circuit board **200** at the transmitter interconnect vias **239** at an opposite end. Though the interconnect leads **225** have been described as providing electrical coupling between the receiver printed circuit board **250** and the transmitter printed circuit board **200**, it is understood that other interconnect devices may be employed including ribbon cable, wires, male and female electrical connectors and the like.

The pair of top frame sides **349A** and **349B** of the top frame **303** engage with the bottom frame sides **341A** and **341B** of the bottom frame **301** respectively when they are assembled together. When assembled, external faces of the top frame sides **349** abut inside faces of bottom frame sides **341**. Each of the top frame sides have a pair of locking tabs **313** which engage with a pair of lock tab apertures **315** in each of the bottom frame sides **341** to hold them together. The locking tabs **313** and the locking tab apertures **315** prevent the bottom frame **301** and the top frame **303** from moving vertically relative to each other. Each vertical edge of the top frame sides **349A** and **349B** mates with the upper tabs **337** and the lower tabs **335** to keep the top frame **303** from moving laterally relative to the bottom frame **301**. The top frame **303** has the pair of alignment rails **307** on edges of the top frame sides **349A** and **349B**. The alignment rails **307** mate with the pair of transmitter slots **233** in the transmitter printed circuit board **200** and the pair of the receiver slots **231** in the receiver printed circuit board **250** to keep them in alignment so that the interconnect leads **225** are not sheared by movement in either and the electrical coupling is maintained. Top frame **303** has a tab **363**, rib, post or other member on the underside of top **347**. When top frame **303** is assembled to the bottom frame **301** and transmitter board **200**, the tab **363** prevents upward movement of transmitter printed circuit board **200**. Additionally, the pair of alignment rails **307** abut a pair of lower support tabs **335** and a pair of upper support tabs **337** to maintain alignment and avoid movement as stress is placed on the

receiver printed circuit board 250 when the fiber optic module is pulled away from a connector. The top frame 303 includes the flange 321 which extends from the top 347 of the top frame 303 as shown and illustrated in FIG. 3. The flange 321 includes an opening 317 which slides over a top post 319 of the optical block 120 of the optical element 103. When the opening 317 of the flange 321 is mated with the top post 319, the top frame 303 is tightly coupled to the optical element 103 to avoid separation when the fiber optic module is inserted or removed from a connector. With the opening 317 engaged to the top post 319 so that the top frame is tightly coupled, the alignment rails 307 of the top frame 303 in conjunction with the receiver slots 231 and the transmitter slots 233, keep the receiver printed circuit board 250 and the transmitter printed circuit board 200 tightly coupled to the optical element 103 as well to avoid separation. The flange 321 includes a flange lip 325 that abuts a recess wall 327 of the optical block 120 to prevent lateral movement of the top frame 303 relative to the optical elements 103.

The top frame 303 includes a pair of top frame sides 349A and 349B and the top 347. These and other elements of the top frame may be formed of a conductive material such as a metal or formed to include a conductive plating or surface. The conductive material of the top frame 303 shunts electromagnetic fields to ground via an electrical coupling to chassis ground. In this manner, the top frame 303 provides electromagnetic interference shielding to the fiber optic module.

The assembled subassembly including the receiver printed circuit board 250, the transmitter printed circuit board 200, the interconnect leads 225, the bottom frame 301 and the top frame 303 can hereinafter be referred to as a printed circuit board assembly 411.

Referring now to FIG. 4A, an exploded view of an outer housing 400 and the printed circuit board assembly 411 is illustrated. The outer housing 400 includes a top cover 401, a bottom cover 402 and the L shaped bottom frame 301. The top cover 401, the bottom cover 402 and the bottom frame 301 couple together and around the optical block 120 to encase the receiver and transmitter printed circuit boards but for one end where the extension in the receiver printed circuit board forms the male connector 235. The top cover 401 includes a top portion and a pair of sides that fit over the printed circuit board assembly 411 and the optical element 103. The top cover 401 includes a plurality of locating tab openings 405 in each of its sides to engage with locating tabs 407 in sides of the optical block 120, in the nose of optical element 103, and in the bottom frame 301. When the locating tab openings 405 are engaged with the locating tabs 407, movement of the top cover 401 relative to the optical element 103 is prohibited. The top cover 401 includes a hood 409 which encloses an end of the transmitter printed circuit board 200 but leaves the connector 235 of the receiver printed circuit board 250 exposed to connect to a connector. The male electrical connector 235 extends from the top cover 401 to mechanically and electrically couple to an external female electrical connector.

The bottom cover 402 is of sufficient size to fill into the cutaway area in the L shaped bottom frame 301. The bottom cover 402 couples to the bottom frame 301 on one side and the top cover 401 on an opposite side.

Referring now to FIGS. 4B and 4C, pins of the male electrical connector 235 are illustrated in detail to provide hot pluggability. The male electrical connector 235 includes one or more ground or negative power pins 460, one or more

positive power pins 461 and one or more signal pins 462 on top and/or bottom surfaces of the receiver printed circuit board 250. The pins 460, 461, and 462 are staggered from each other with reference to an edge 465 of the receiver printed circuit board 250 to facilitate the hot pluggability. The ground pins 460 of the male electrical connector 235 are closer to the edge 465 than any other pin in the male electrical connector 235 in order for ground to be established first when the fiber optic module is inserted and for ground to be removed last when its removed. The positive power pins 461 are next closest to the edge 465 for power to be established secondly when the fiber optic module is inserted and for power to be removed next to last when its removed. The signal pins 462 are farther from the edge that the power pins 461 and ground pins 462 so that they are established after power and ground has been when inserted and they are disconnect first when the fiber optic module is removed.

During the mating of the male electrical connector 235 with an external female electrical connector, the ground pins electrically couple first to ground receptacles of the external female electrical connector in order to ground the fiber optic module 100. During the demating of the male electrical connector 235 and external female electrical connector, the ground pin electrically decouples from the ground last to maintain the grounding of the fiber optic module 100 until after power is removed from the fiber optic module 100. The ground pins 460 being closer to the edge 465 than the power pins 461 and the signal pins 462, prevents damage and disruption to the fiber optic module and the system during the physical insertion and removal of the fiber optic module into and out of the system. The capability to physically remove and insert the fiber optic module during operation without damage or disruption is referred to as hot pluggability.

The outer housing 400, including the top cover 401 and the bottom cover 402 and the bottom frame 301, may be formed of a conductive material such as a metal or include a conductive plating or surface. With the outer housing 400 formed out of a conductive material, the outer housing 400 can shunt electromagnetic fields radiating into the outer housing 400 to ground via an electrical coupling to chassis ground. In this manner the outer housing 400 also can provide electromagnetic interference shielding to the fiber optic module.

Referring now to FIG. 5, an exploded view of the fiber optic module 100 from the front is illustrated. The bottom cover 402 of the outer housing 400 includes a pair of tabs 509 on one side and a pair of projections 505 on an opposite side. The projections 505 of the one side engage a pair of holes 507 in a side of the rail 305A of the bottom frame 301. The projections 505 in the opposite side of the bottom cover 402 engage the housing holes 511 in a side of the top cover 401. The inside surface of the side of the top cover 401 couples to the outer surface of the side of the bottom cover 402 when the tabs 509 are mated with the housing holes 511.

The bottom cover 402 can be readily disassembled and reassembled with the top cover 401 and the bottom frame 301 of the fiber optic module 100. By removing the bottom cover 402, a portion of the receiver printed circuit board is exposed to allow access to adjust adjustable electrical components (not shown) on the receiver printed circuit board 250. The adjustable electrical components electrically couple to the electrical components 227 on the receiver printed circuit board 250. The adjustable electrical components electrically couple to the electrical components 229 by way of a conductive path through one or more transmitter traces 361 on the receiver printed circuit board 250, the

11

interconnect vias 225, and the transmitter traces 247 on the transmitter printed circuit board 200. The adjustable electrical components may include DIP switches, potentiometers, variable capacitors and other devices used to tune or adjust the performance of the fiber optic module 100.

The bottom cover 402 can also be formed of a conductive material such as a metal or include a conductive plating or surface which is coupled to chassis ground (via holes 507, housing holes 511 and tabs 505 and projections 509) in order to provide electromagnetic interference shielding for the fiber optic module 100.

FIG. 6A illustrates a top view of a fully assembled fiber optic module 100. FIG. 6B illustrates a bottom view of a fully assembled fiber optic module 100. FIG. 6C illustrates a right side view of a fully assembled fiber optic module 100. FIG. 6D illustrates a left side view of a fully assembled fiber optic module 100. FIG. 6E illustrates a front view of a fully assembled fiber optic module 100. FIG. 6F illustrates a rear view of a fully assembled fiber optic module 100. To assemble the fiber optic module 100 of the invention, the receiver printed circuit board 250 is first slid into the slots 309 of the bottom frame 301 between the upper support tabs 337 and the lower support tabs 335 until the receiver slots 231 are adjacent to, and just inside an end of the bottom frame 301. When receiver printed circuit board 250 is properly positioned in the bottom frame 301, receiver electrical components 227 are face down, the ground plane is face up and the male electrical connector 235 extends beyond the end of the bottom frame 301 so that its external thereto.

Next, the one or more interconnect leads 225 are then press fit into the receiver interconnect vias 241. Solder is applied to the interconnect leads 225 at the receiver interconnect vias 241.

Then the transmitter interconnect vias 239 of the transmitter printed circuit board 200 are aligned with the one or more interconnect leads and press fit together so that the transmitter printed circuit board rests on top of the upper support tabs 337. With proper orientation, the ground plane is facing down toward the receiver printed circuit board while the transmitter electrical components 229 are on the face up side on the surface of the transmitter printed circuit board 200 and opposite the receiver printed circuit board 250. After press fitting them together, solder is applied to the interconnect leads 225 at the transmitter interconnect vias 239.

The top frame 303 is next in the assembly process. The alignment rails 307 of the top frame 303 are aligned with the transmitter slots 233 and the receiver slots 231. The alignment rails 107 are inserted into the transmitter slots 233 so that external surfaces of the sides 349A and 349B slide into the internal surfaces of the sides 341A and 341B respectively. The top frame 303 is coupled to the bottom frame such that the alignment rails 107 slide through the transmitter slots 233 and the receiver slots 231 until the locking tabs 313 engage with the lock tab apertures 315 to lock the top frame 303 in place relative to the bottom frame 301.

The optical elements 103 are prepared in parallel with forming the printed circuit board assembly 411. A die (not shown) is used to bend the signal leads of the light transmitter 110 through 90 degrees to form the formed signal leads 205 of the invention. The optical elements are then assembled and aligned together as a subassembly 103.

The printed circuit board subassembly 411 is then coupled together to the optical elements subassembly 103. The printed circuit board subassembly 411 is positioned with the optical elements so that the receiver contacts 203 of the

12

receiver printed circuit board 250 align with the space between the horizontal rows of straddle mount signal leads 201. The flange 321 of the top frame 303 is flexed upward so that the opening 317 can mate with the post 319. The printed circuit board subassembly 411 and optical element 103 are brought together so that the receiver contacts 203 can electrically be couple to the straddle mount signal leads 201 and the tip 355A slides into the opening 155. The flange 321 is then released so that the opening 317 slides over the top post 319 to secure the printed circuit board subassembly 411 to the optical element subassembly 103.

Next the outer housing 400 is completed around the printed circuit board subassembly 411. The top cover 311 is aligned with the printed circuit board subassembly 411 so that the locating tab openings 405 can mate with the locating tabs 407. The top cover 401 is slid over the optical element subassembly 103 and the printed circuit board subassembly 411 so that the locating tabs 407 snap into the locating tab openings 405.

The bottom cover 402 is then couple to the bottom frame 301 and the top cover 401. The bottom cover is tilted so that the projections 505 engage the holes 507 in the side of the rail of the bottom frame 301. Then, the top cover 402 is pressed upward so that the tabs 509 engage with the housing holes 511 so that the bottom cover 402 is secured in place to complete the assembly of the fiber optic module 100.

For transmitting signals, the fiber optic module 100 electrically functions such that external electrical transmitter signals arriving at transmitter pins 243 in the male electrical connector 235 are coupled into the transmitter traces 247 routed on the receiver printed circuit board 250. The transmitter traces 247 couple the external electrical transmitter signal from the transmitter pins 243 to the receiver interconnect vias 241. The receiver interconnect vias 241 couple the transmitter signals to the one or more interconnect leads 225. The one or more interconnect leads 225 couple the electrical signals from the receiver interconnect vias 241 at one end into the transmitter interconnect vias 239 at an opposite end. The transmitter traces 247 on the transmitter printed circuit board 200 couple the electrical signals from the transmitter interconnect vias 239 into the transmitter electrical components 229 and/or the transmitter 110. The transmitter electrical components 229 process the electrical signals into electrical transmission pulses for coupling to the light transmitter 110. The light transmitter 110 transduces the electrical transmission pulses into light pulses for transmission over the fiber optic cables.

For receiving signals, the fiber optic module 100 electrically functions such that external light pulses arriving at the LC receptacles 161 are transduced into electrical pulses by the light receiver 111 for coupling into the receiver electrical components 227. The receiver electrical components 227 process the electrical pulses into electrical receiver signals which are coupled to the receiver traces 249 of the receiver printed circuit board 250. The receiver traces 249 couple the receiver signals to the receiver pins 245 in the male electrical connector 235 by which the electrical receiver signals are coupled to external devices. In one embodiment of the invention, one electrical component on one of the printed circuit boards controls both the light transmitter 110 and the light receiver 111.

In operation, the fiber optic module 100 may be housed in a rack or a cabinet designed to house an LC, GBIC package. When the fiber optic module 100 is inserted into the rack the male electrical connector 235 couples to a female electrical connector of the rack or cabinet. As the electrical connectors

13

couple, one or more ground pins in the male electrical connector **235** electrically couples to one or more corresponding ground receptacles in the female electrical connector before any other pin electrically couples. One or more power pins in the male electrical connector **235** electrically couple to one or more corresponding power receptacles in the female electrical connector before any signal pins electrically couple. After the ground and power pins have coupled, one or more signal pins may then electrically couple to one or more corresponding signal receptacles. Either before or after the fiber optic module is inserted into the rack, fiber optical cables (not shown) are connected to the LC receptacles **161**.

When it is desired to replace the fiber optic module **100** for some reason, the invention allows hot pluggable replacement. First the fiber connector is removed from the fiber optic module **100**. Then the module is disconnected from any electrical connector into which it is coupled. As it is disconnected, the signal pins decouple first, the power pins second and the ground pins last. After which a new fiber optic module **100** can be inserted with the connecting sequence occurring as discussed above.

After the fiber optic module is disconnected, the optical element subassembly **103** or the printed circuit board subassembly **411** may be easily replaced. To replace the optical element **103**, the flange **321** is flexed up to demate the opening **317** and the top post **319**. The optical subassembly **103** is then pulled away from the printed circuit board assembly **411**. As the optical subassembly is pulled away from the printed circuit board assembly **411**, the straddle mount signal leads **201** decouple from the receiver contacts **203**. The formed signal leads **205** also decouple from the header signal vias **207**. A replacement optical subassembly is then coupled to the printed circuit board assembly **411** as discussed above. After which the fiber optic module **100** (the replacement optical element **103** coupled to the printed circuit board assembly **411**) can be inserted with the connecting sequence occurring as discussed above.

To replace the printed circuit board assembly **411**, the fiber optic module is removed as discussed above, except that the fiber optic cables need not be removed from the LC receptacles **161**. The flange **321** is flexed up to demate the opening **317** and the top post **319**. The optical element **103** is then pulled away from the printed circuit board assembly. As the printed circuit board assembly **411** is pulled away from the optical element **103**, the straddle mount signal leads **201** decouple from the receiver contacts **203**. The formed signal leads **205** also decouple from the header signal vias **207**. A replacement printed circuit board assembly **411** is then coupled to the optical element **103** as discussed above. After which the fiber optic module **100** (the optical element **103** coupled to the replacement printed circuit board assembly **411**) can be inserted with the connecting sequence occurring as discussed above.

The previous detailed description describes the fiber optic module **100** as including one receiver and one transmitter. However, one of ordinary skill can see that the fiber optic module **100** may include two or more combinations of vertically stacked receivers, or transmitters, or receivers and transmitters. One embodiment of the invention includes four vertically stacked transmitters. Another embodiment includes four vertically stacked receivers. Yet another embodiment includes a combination of four vertically stacked transmitters and receivers.

Furthermore, as one of ordinary skill can see, the positions of the receiver printed circuit board **250** and the

14

transmitter printed circuit board **200** may be reversed. In this embodiment of the invention, the transmitter printed circuit board **200** has the cutout **209** creating a distance **211** for the formed signal leads **205** of the light receiver **111**. The formed signal leads **205** of the light receiver **111** couple to the header signal vias **207** on receiver printed circuit board **250**. The straddle mount signal leads **201** of the light transmitter **110** couple to contacts on the transmitter printed circuit board **200**. In this embodiment, the electrical components **227** and **229** are on opposite surfaces of the printed circuit boards **250** and **200** so that the ground planes **213** and **215** provide electromagnetic shielding to the electrical components **227** and **229**.

In another embodiment of the invention, the transmitter printed circuit board **200** includes the male electrical connector **235**. Receiver traces **249** of the transmitter printed circuit board **200** couple receiver pins **245** of the male electrical connector **235** to the interconnect vias **225**. The interconnect vias **225** couple the receiver traces **249** of the transmitter printed circuit board **200** to receiver traces **249** of receiver printed circuit board **250** for coupling to receiver electrical components **227**. The transmitter printed circuit board **200** also includes a portion that protrudes from the outer housing **400** and that includes the male electrical connector **235**, thereby allowing the male electrical connector **235** to couple to an external female electrical connector.

One aspect of the invention provides a push-button release mechanism and easy withdrawal mechanism for removable or pluggable fiber optic modules which are coupled into a module receptacle or cage assembly. Additionally, a piggy-back or belly-to-belly fiber optic module configuration is provided. The quick release is a mechanical device for de-latching or unplugging a fiber optic module from a module receptacle or cage assembly. The invention is particularly applicable to de-latching or unplugging an SFP fiber optic module from an SFP cage assembly or module receptacle. The invention provides a set of mechanical devices designed to enhance the de-latching and withdrawing process of removable or pluggable fiber optic modules from cages or receptacles. The mechanical devices include three main components consisting of (1) a kicker-actuator, (2) a withdrawal tab, and (3) a nose grip.

To de-couple a pluggable fiber optic module from a cage or module receptacle, the pluggable fiber optic module is de-latched or unlatched and unplugged from any sockets or connectors of the cage or module receptacle.

Referring now to FIG. 7A, a disassembled pluggable fiber optic module **700** is illustrated. Fiber optic module **700** is a pluggable or removable type of fiber optic module in that it can slide in and out into a cage or receptacle having a electrical connector and coupled there to or decoupled therefrom. The pluggable fiber optic module **700** is push button releasable and includes an electro-optical subassembly **701** and a mechanical sub-assembly **701** and a mechanical sub-assembly **702**. The mechanical sub-assembly **702** couples to the optical block **120** of the electro optical sub-assembly **701**.

In one embodiment, the fiber optic module **700** is an SFP module and the cage assembly or module receptacle into which it plugs is an SFP cage assembly or SFP module receptacle. Otherwise, the fiber optic module incorporating the invention can be any type of pluggable fiber optic module.

Portions of the electro-optical sub-assembly **701** of the fiber optic module **700** are previously described herein with reference to FIGS. 1-6F.

15

The mechanical sub-assembly **702** includes a nose receptacle **704**, a kicker-actuator **705** (also referred to as push button), an actuator **706**, a withdraw tab **708** with an optional pull grip **709**. The kicker-actuator **705** serves as an extension arm to the actuator **706**. In one embodiment, the actuator **706** is an SFP actuator.

The nose receptacle receives one or more fiber optic connectors from which an optical fiber may be attached. The nose receptacle **704** aligns ends of the fiber optic cables with optical openings therein. In one embodiment, the nose receptacle **704** is an SFP receptacle to receive a duplex SFP fiber optic connector.

Referring now to FIG. 7B, a view from the bottom of the disassembled fiber optic module **700** is illustrated. The bottom side of the nose receptacle **704** includes a boss **1002**, an opening **745** having a pair of tangs **741** on opposite sides thereof and a rib or septum **747**. The catch or boss **1002** interfaces to a latch of the cage or receptacle. The opening **745** in the nose receptacle **704** is for slideably engaging with the actuator **706** for releasing the boss **1002** from a latch and freeing the fiber optic module from a cage or receptacle. The actuator when assembled slides over the rib or septum **747**. The rib or septum **747** can provide slideable support to the actuator **706** to allow it to push out on the latch while the tangs can provide slideable guidance in movement of the kicker-actuator **705** and the actuator **706**.

FIGS. 7C and 7D provide additional top and bottom views of the disassembled fiber optic module **700** illustrated from a different angle. Viewable in FIG. 7D, the actuator **706** includes one or more ramps or wedges (a pair of which are illustrated) **1308**, slot or grooves **721** on each side having an opening at one end and a closure at an opposite end. The slot or grooves **721** slideably engage the tangs **741** in the nose receptacle **704**.

Referring now to FIGS. 7C and 7D, the kicker-actuator **705** has a hook **902** to hook onto the actuator **706** by mechanical means. The actuator **706** includes an opening **707** into which the hook **902** of the kicker actuator **705** may couple in order to couple them together.

The nose receptacle **704** includes a nose grip **714** at its sides, alignment pins **715** and optical openings **716** at a front side and one or more fiber plug openings **717** at a back side. In one embodiment, the nose grip **714** has a left side **714L** and a right side **714R** including vertical ribs near the front around the openings of the fiber optic receptacles. The nose grip serves as the additional gripping area during the withdrawal process of the fiber optic module. The nose grip **714** includes one or more vertical ribs on the nose receptacle. The one or more vertical ribs increase pressure between gripping fingers and hence prevent slippage during handling. The nose grip **714** is an integrated part of the nose receptacle **704** and can be formed of similar materials.

FIGS. 7E-7F illustrate an alternate fiber optic module **700'** having an alternate embodiment of a withdrawal tab **708'**. The fiber optic module includes the alternate mechanical subassembly **702'** with the alternate withdrawal tab **708'**. The withdrawal tab **708** described with reference to FIGS. 7A-7D was coupled to the nose receptacle and extended across the top surface of the fiber optic module **700**. A user would pull on the withdrawal tab **708**, extending across the top surface or plane of the fiber optic module, to withdraw the fiber optic module. In the embodiment shown in FIGS. 7E-7F, the withdrawal tab **708'** couples between the optical block and the nose receptacle and extends from the bottom surface of the fiber optic module **700'**. A user pulls on the withdrawal tab **708'**, extending across the bottom surface or

16

plane of the fiber optic module, to pull the fiber optic module out from a cage or receptacle. The withdrawal tab **708'** includes a pull area **709'** that may optionally include a pull grip, a pair of arms **724** joined around an opening **725** and an EMI shield or plate **756**. The opening **725** provides for the kicker-actuator **705** and the actuator **706** to extend through it and slide back and forth in the nose receptacle **704** when assembled together. The EMI shield or plate **756** includes optical openings and alignment openings similar to the EMI shield **806** discussed further below and includes one or more grounding tabs **788**. Alternatively, the withdrawal tab **708'** may be non-conductive and not include the grounding tabs **788**.

FIGS. 7G-7H illustrate an alternate fiber optic module **700''** having an alternate embodiment of a withdrawal tab **708''**. The fiber optic module includes the alternate mechanical subassembly **702''** with the alternate withdrawal tab **708''**. The withdrawal tab **708** described with reference to FIGS. 7A-7D coupled to the nose receptacle at the top of the fiber optic module **700** and a user pulled from the top. The withdrawal tab **708''** couples between the optical block and the nose receptacle and extends from one or both sides of the fiber optic module **700''**. A user pulls on the withdrawal tab **708''** from one or both sides of the fiber optic module to pull it out from a cage or receptacle. The withdrawal tab **708''** includes one or two pull areas **709''** that may optionally include a pull grip, a left pull arm **734L**, a right pull arm **734R** or both, and an EMI shield or plate **766**. The EMI shield or plate **766** includes optical openings and alignment openings similar to the EMI shield **806** discussed further below and includes one or more grounding tabs **788**. Alternatively, the withdrawal tab **708''** may be non-conductive and not include the grounding tabs **788**.

Referring now to FIGS. 8A-8G, views of a withdrawal tab **708** with the optional pull grip **709** are illustrated. The withdrawal tab **708** may include an arm **804**, an EMI shield **806**, and grounding tabs **808**. Alternatively, the EMI shield **806** can be replaced by a similar shaped non-conductive plate without grounding tabs **808**. The withdrawal tab **708** may also be referred to as a pull actuator. The withdrawal tab **708** has a paddle area **802** coupled to the arm **804** which couples to the optional pull grip **709**.

In one embodiment, the withdrawal tab **708** is a flexible protruding handle that serves as the pull-out tab for users during the withdrawal of the fiber optic module. The withdrawal tab **708** extends out from the fiber optic module to provide an easy reach and grip to a user. The withdrawal tab **708** may further include the optional pull grip **709** to prevent slippage during handling. The optional pull grip **709** may be formed of a rubber or plastic material.

The arm **804** can be flexed or folded up with minimal effort. Additionally, the arm **804** avoids the withdrawal tab from obstructing optical connectors during the insertion of the fiber optic module. The arm **804** can be formed out of sheet metal, rubber sheet or plastic sheet materials. The optional pull grip **709** can be injection molded by using a rubber or plastic resin.

The withdrawal tab **708** can itself provide an EMI shield **806**, a vertical component, that rests between a nose receptacle **704** and an optical block or port **120** (as shown in FIGS. 10A-10E). As the name implies, the EMI shield **806** has a shielding ability to cut off EMI emitting from the front of the nose receptacle of the fiber optic module. The EMI shield **806** includes one to four grounding tabs **808** that provide additional guarding of EMI emission around the EMI shield. The grounding tabs **808** also provide grounding

links or contacts between the EMI Shield **806** and the cage assembly or module receptacle. In typical cases, the cage assembly or module receptacle is grounded.

Referring now to FIG. **8C**, the EMI shield **806** includes alignment pin openings **812** to allow alignment pins **715** of the nose receptacle **704** to poke through. The EMI shield **806** further includes a first optical opening **814** for a first opto-electronic device and a second optical opening **816** for a second opto-electronic device. One of the optical openings may be larger than the other to allow for an entrance angle of light or photons for a receiving opto-electronic device.

Referring now to FIGS. **9A–9I**, the kicker-actuator **705** is illustrated in detail. The kicker-actuator **705** is also referred to as a push button. The kicker-actuator **705** includes a snap on hook **902**, an arm or push rod **904**, and an offset push tab or button **906**. The offset push tab or button **906** can include an orientation indicator **908**. In one embodiment, the offset push tab or button **906** is offset of the center of the push rod **904** to provide clearance for belly-to-belly mounting configurations described further below. The hook **902** is at one end of the arm while the off set push tab **906** is at the opposite end of the arm **904**. The push rod **904** can include a depression so that it clears a corner of the nose receptacle during assembly. The subassembly of the actuator **706** and kicker-actuator **705** are inserted into the nose receptacle **704** on an angle and snapped into place to slideably engage the nose receptacle **704**. The kicker-actuator **705** can be formed out of epoxy, thermoplastic, rubber or metal.

The off-set push tab **906** is characterized by its L-shape cross-section. The snap-on-hook **902** is a locking mechanism for securing the kicker-actuator **705** on the actuator **706**. The orientation indicator **908** is arrow-shaped on the front face of the off-set-push tab **906** to indicate which fiber optic module it releases.

Referring now to FIGS. **10A–10G**, an assembled mechanical sub-assembly **702** is assembled together with the optical block **120**. The optical block **120** and the nose receptacle **704** coupled together sandwiching an EMI shield tab **806** or a plate of the withdrawal tab **708** there between. The ground tabs (**808L** and **808R**) wrap around and onto the optical block **120**. The non-conductive plate of the withdrawal tab needs no ground tabs. The kicker-actuator **705** is coupled to the actuator **706** which is in turn coupled to the nose receptacle **704**. In order to couple the kicker actuator **705** and the actuator **706** together, the snap on hook **902** of the kicker-actuator **705** couples into the opening **707** of the actuator **706**. This is then snapped into the bottom side of the nose receptacle **704**.

The kicker-actuator **705** extends out from the front edge of the nose receptacle and thus is visible to end-users and as well as accessible so that it can be pushed inward. The kicker-actuator **705** and the actuator **706** provide a de-latching mechanism for the fiber optic module **700**. A force exerted inward on the kicker-actuator **705** is utilized to de-latch the fiber optic module **700**.

The withdraw tab **708** and the nose grip (**714L** and **714R**) provide a withdrawal mechanism for the fiber optic module **700**.

Referring now to FIGS. **11A–11E**, views of an exemplary cage assembly or module receptacle **1100** for fiber optic modules is illustrated. In FIG. **11B**, the latch **1102** is illustrated in a bottom view of the module receptacle **1100**. The latch **1102** includes a catch **1105** that mates with the hook or boss **1002**. As illustrated in the cross sectional view of FIG. **11C** and the exploded cross-sectional view of FIG. **11D**, the latch **1102** is flexed downward in order to release

the fiber optic module. The actuator **706** flexes the latch **1102** downward when a force is exerted on the kicker-actuator or push button **705**. A ramp of the kicker-actuator **705** meets a lip **1108** of the latch **1102** which is bent on an angle and then flexes the latch **1102** outward so that the catch **1105** is released from the hook or boss **1002**. This release mechanism and method is described further below.

Referring now to FIG. **12**, fiber optic module **700** is inserted into the cage or receptacle **1100**. FIG. **12** illustrates a bottom view showing the latch **1102** and the boss **1002** of the nose receptacle **704**. The boss **1002** engages into the catch or opening **1105** of the latch **1102**.

Referring now to FIGS. **13A** and **13B**, cross sections of the fiber optic module **700** inserted into the cage or receptacle **1100** are illustrated. The boss **1002** extends through the opening **1105** to be engaged with the latch **1102**. In FIGS. **13A** and **13B**, the kicker-actuator **705** is in an un-pushed or steady state. The spring tension in the latch **1102** tends to move the kicker-actuator **705** into this state. The actuator **706** includes one or more ramps **1308** that engage the lip **1108** of the latch **1102** of the cage or receptacle **1100**. The ramps **1308** slideably engage the lip **1108** and pushes out on the latch **1102** therefrom. In the case of the boss **1002**, a pair of ramps **1308** are used so that they can slide over it and continue pressing out on the latch.

Referring now to FIGS. **14A** and **14B**, cross section similar to that of FIGS. **13A** and **13B** are illustrated but for the kicker-actuator **705** being depressed to disengage the latch **1102** from the boss **1002**. In this case the opening **1105** of the latch **1102** is not engaged with the boss **1002** of the nose receptacle.

Referring now to FIG. **14B**, the kicker-actuator **705** is pushed in or depressed. By pushing in on the off-set push tab **906**, the kicker-actuator **705** directs the actuator **706** to the de-latching position, allowing the fiber optic module **700** to be disengaged from the cage or receptacle **1100**. As illustrated in **14B**, the kicker-actuator **705** pushes in on the actuator **706** causing the one or more ramps **1308** to push out on the lip **1108** and release the latch **1102** from around the boss **1002**. With the catch or opening **1105** in the latch **1102** disengaged, the fiber optic module **700** can be pulled out from the cage or receptacle **1100**. The fiber optic module **700** can be pulled out by using the withdrawal tab **708** and/or the nose grip (**714L** and **714R**).

Referring now to FIG. **15**, a flow chart diagram is illustrated of a method of releasing a fiber-optic module that includes an embodiment of the invention. The method begins at step **1500** (i.e. start) using a fiber-optic module, such as fiber optic module **700** for example, that includes an embodiment of the invention which is inserted into a module cage or receptacle, such as the cage or receptacle **1100** for example. The method then jumps to step **1502**. At step **1502**, a user pushes in on the release push-button or kicker-actuator **705** disengaging the latch **1102** of the cage or receptacle **1100** from the boss **1002** of the fiber optic module **700** for example. At step **1504**, the user then pulls out on the fiber-optic module using a pull mechanism such as the withdrawal tab **708** or the nose grip (**714L** and **714R**) of the nose receptacle to begin pulling out the fiber optic module. At the next step, step **1506**, a check is made whether the boss **1002** of the fiber optic module has cleared the key or latch **1102**. If past, the method jumps to step **1507** where a user continues to pull out on the fiber optic module until completely removed and the method ends at step **1508**. If not past the latch **1102**, the method jumps back to step **1502** where a user continues to push in on the release push button

19

or kicker-actuator **705** and continues to pull out on the fiber optic module at step **1504**.

Referring now to FIG. **16**, a flow chart diagram is illustrated of a method of engaging a fiber-optic module that includes an embodiment of the invention into a cage or receptacle. The method begins at step **1600** (i.e. start) using a fiber-optic module that includes the invention. The method then jumps to step **1602**. At step **1602**, the fiber-optic module is inserted and pushed into an opening in a module cage or receptacle. At step **1604**, a check is then made to determine whether the fiber optic module is fully inserted into the cage or receptacle. An indicator is the push button or kicker-actuator **705**. If the push-button or kicker-actuator **705** is fully out, it is an indication that the fiber optic module is fully inserted. If the fiber optic module is not fully inserted, the fiber optic module needs to be pushed in further into the module cage or receptacle at step **1602** so that the latch **1102** engages the boss **1002**. If the fiber optic module is fully inserted, the method jumps to step **1606** where the method ends.

It is desirable to include/increase the density of fiber optic modules in a system. Another way of doing so is to place fiber optic modules in a belly-to-belly mounting configuration on opposite sides of a host printed circuit board.

Referring now to FIGS. **17A–17C**, such a high density fiber optic system **1700** is illustrated providing a belly-to-belly mounting configuration. System **1700** includes a face plate or bezel **1702**, and a host printed circuit board **1704**. For a belly to belly configuration of fiber optic modules, the bezel or face plate **1702** includes one or more openings **1706A–1706B** therein in order to allow fiber optic cables to interface to the fiber optic modules, or in case of pluggable fiber optic modules such as fiber optic modules **700A** and **700B**, the openings **1706A–1706B** in the bezel or face plate **1702** also allow the insertion and removal of the fiber optic modules themselves. The kicker-actuator **705** facilitates easy removal of the fiber optic module **700A** and **700B** when in a belly-to-belly configuration. The kicker-actuator **705A** of the fiber optic module **700A** and the kicker-actuator **705B** of the fiber optic module **700B** meet together when both fiber optic modules are inserted into the respective receptacles or cage assemblies **1100A** and **1100B**. The cage receptacles **1100A** and **1100B** sandwich the host printed circuit boards **1704**. While only two fiber optic modules are illustrated in FIG. **17A** in a belly-to-belly configuration, it is understood that additional fiber optic modules can be arrayed out as belly-to-belly configured fiber optic modules side by side in the system **1700** so that a plurality of fiber optic modules **700** maybe inserted therein.

The respective kicker-actuator **705A** and **705B** mate together to form one button that can be utilized to de-latch out both fiber optic modules **700A** and **700B** at one time.

Referring now to FIGS. **18A–18D**, details of how the mechanical elements **702** of each of the fiber optic modules **700A** and **700B** come together in a belly-to-belly mounting configuration are illustrated.

The kicker-actuator **705A** and the kicker-actuator **705B** are interleaved with a small gap there-between to allow either one or both to be pushed individually or simultaneously to remove one or both fiber optic modules **700A** and **700B**. The orientation indicator (i.e. an arrow sign **908**) on the front face of the off-set push tab **906** provides a clear indication as to which fiber optic module does each actuator-kicker **705** serve during a high density module mounting or a belly-to-belly mounting configuration. The kicker-actuator **705A** has its orientation indicator **908A** pointing upward

20

towards fiber optic module **700A**. The kicker actuator **705B** has its orientation indicator **908B** pointing downward towards fiber optic module **700B**. In this manner the orientation indicator **908** indicates which of the two push buttons to release the respective fiber optic module **700A** or **700B**. Each of the respective kicker **705A** and **705B** couple to the respective actuator **706A** and **706B** of the fiber optic module **700A**, **700B** respectively.

The gap between actuators **706A** and **706B** is rather small (approximately 0.5 mm or less). Without the kicker-actuators **705A** and **705B**, it is difficult to access the respective actuators **706A** and **706B**. The design of the off-set push tab **906** enables the kicker-actuator **705** to be functional at such a close gap in mounting the fiber optic modules.

Referring now to FIGS. **19A–19F** and FIGS. **20A–20D**, views of an integrated push button actuator **1900** are illustrated. The integrated push button actuator **1900** includes features of the actuator **706** and the kicker-actuator **705** integrated into a single unit. The integrated push button actuator **1900** includes an actuating end **1906** having one or more ramps **1909** at the end and slots or grooves **1921** at each side to slideably interface with the tangs **741** of the nose receptacle **704**, an arm or push rod **1904**, and an offset push tab **1906** that may have an orientation indicator **1908**. The integrated push button actuator **1900** has no hook that needs to couple together the kicker actuator **705** into an opening in the actuator **706**. Thus, the integrated push button actuator **1900** provides for lower assembly costs by reducing assembly steps. The integrated push button actuator **1900** need only be snapped into the tangs **741** of the nose receptacle of the fiber optic module for assembly thereto.

FIGS. **21A–21D** illustrate alternate push button embodiments for the kicker actuator **705** and the integrated push button actuator **1900** without an offset for the belly-to-belly mounting configuration. FIG. **21A–21B** illustrates a round or oval push button **906'** in line with the arm or push rod. FIGS. **21C–21D** illustrate a rectangular or square shaped push button **906"** in line with the arm or push rod.

Referring now to FIGS. **22A–22H**, an alternative embodiment of a nose receptacle **2200**, including a pull-actuator **2200** for fiber optic modules is illustrated. The pull-actuator or de-latch puller **2202** can be used to de-couple and remove the fiber optic module (only the nose receptacle **2200** portion is shown) by pulling the pull-actuator **2202** backwards or away from the nose receptacle **2200**.

The nose receptacle **2200** may be incorporated as part of a fiber optic module or pluggable fiber optic module as previously illustrated in other embodiments described above (i.e., **100**, **700**, etc.).

FIG. **22H** illustrates how a fiber optic module (nose receptacle **2200** portion shown) may include the pull-actuator **2202** and a pivot-arm actuator **2204** to couple and decouple the fiber optic module to a cage assembly or module receptacle such as **1100** (only cage assembly latch portion **1102** is shown). When engaged, the pivot-arm actuator **2204** latches with the cage assembly latch **1102** to secure the fiber optic module to the cage assembly.

FIG. **23** further illustrates the pull-actuator **2202**, pivot-arm actuator **2204** and cage assembly latch **1102**. The pivot-arm actuator **2204** includes a latch key, keeper, pin, hook, or boss **2502** (these terms are herein used interchangeably) which engages with a catch or opening **1105** in the cage assembly latch **1102** to secure the fiber optic module to the cage assembly **1100**. When the pull-actuator **2202** is pulled away from the cage assembly **1100**, the pull-actuator causes the pivot-arm actuator **2204** to pivot

21

about its pivoting pin **2506** to cause the keeper, hook or boss **2502** to disengage from the cage latch **1102** thereby releasing the nose receptacle **2200**.

FIGS. **24A–24I** illustrate one embodiment of the pull-actuator **2202**. The pull-actuator **2202** may include a pull-tab **2402**, an orientation indicator **2404**, and a shaft or pull-arm **2406** coupled to the pull-tab **2402** at one end. In alternative embodiments, the pull-tab **2402** may also be a pull-button, a pull-hook, a pull-ring, a pull square, or any other equivalent mechanism with which to activate the pull-actuator **2202**. A first surface **2408** and a second surface **2410** are coupled to the other end of the pull-arm **2406**. The first surface **2408** includes an opening or catch **2416** to allow the pivot-arm actuator to engage the pull-actuator. The second surface **2410** may be two tabs (FIG. **24B**, **2410A** and **2410B**) which define a channel **2418** through which the pivot-arm actuator **2204** moves to engage the pull-actuator **2202**.

The pull-actuator **2202** may also include an optional orientation indicator **2404** which serves to indicate the nose receptacle which the corresponding pull-actuator releases. One implementation in which the orientation indicator **2404** is useful is where the fiber optic modules are configured in a belly-to-belly configuration.

According to one embodiment, the first surface **2408** and the second surface **2410** may define grooves **2412** which serve to slideably couple the pull-actuator **2202** to the nose receptacle **2200**. The nose receptacle **2200** may include corresponding rails on which the grooves **2412** of the pull-actuator slide. In another embodiment, the grooves may be part of the nose receptacle **2200** with the rails being part of the pull-actuator **2202**.

As illustrated in FIG. **24H**, the pull-actuator **2202** also comprises a catch or opening **2416** on which a keeper, hook, or boss **2504** of the pivot-arm actuator **2204** engages.

FIGS. **25A–25I** illustrate one embodiment of a pivot-arm actuator **2204**. The pivot-arm actuator **2204** comprises a pivoting pin **2506**, a first latch key, keeper, pin, hook, boss, or engaging triangle **2502** (these terms are herein used interchangeably) at a first end, and a second latch key, keeper, pin, hook, or boss **2504** at a second end opposite the first end. The first keeper or hook **2502** serves to secure or couple the nose receptacle **2200** or fiber optic module to the cage assembly latch **1102**. The second keeper or hook **2504** serves to couple the pivot-arm actuator **2204** to the pull-actuator **2202**.

According to an alternative embodiment, the first keeper and/or second keeper on the pivot-arm actuator **2204** may be a catch or opening, with a corresponding keeper on the pull-actuator **2202** and/or cage assembly **1100** instead.

When the fiber optic module is fully engaged or secured to the cage assembly or module receptacle, the first keeper **2502** couples to an opening **1105** in the cage assembly latch **1102**. The second keeper **2504** couples to the catch or opening **2416** in the pull-actuator **2202**. The second keeper **2504** includes a ramped sliding surface **2508** which causes the pivot-arm actuator **2204** to rotate or pivot when the pull-actuator **2202** is pulled. The edge on the pull-actuator **2202** on which the ramped sliding surface **2508** pivots may be rounded in one embodiment.

The pivot-arm actuator **2204** is pivotally coupled to the body of the nose receptacle **2200** by means of a pivoting pin **2506**. In one embodiment, the pivoting pin **2506** fits through a corresponding opening in the fiber optic module or nose receptacle body **2200**.

FIGS. **26A–26C** illustrate various cross-sectional views of a fiber optic module (nose assembly **2200** and latching

22

mechanism **2202** and **2204** are shown) engaged or coupled to a cage assembly **1100** (cage latch portion **1102** is shown). These figures show a latching mechanism employing the pull-actuator **2202** and pivot-arm actuator **2204** as illustrated in FIGS. **24A–24I** and FIGS. **25A–25I** respectively.

The engaging triangle **2502** fits through a corresponding opening or catch **1105** (shown in FIG. **23**) to engage, couple, or secure the fiber optic module (only the nose receptacle **2200** portion is shown) to the cage assembly **1100** (only cage latch **1102** portion is shown). In the engaged position, the second keeper **2504** on the pivot-arm actuator **2204** fits through the opening or catch **2416** in the pull-actuator **2202**. In this position, surface **2414** on the pull-actuator **2202** is adjacent to surface **2510** (FIG. **25E**) on the pivot-arm actuator **2204**.

Referring now to FIGS. **27A–27C**, the operation of the pull-actuator **2202** and pivot-arm actuator **2204** when disengaging and withdrawing the fiber optic module (nose receptacle **2200**) from its cage assembly **1100** (cage latch **1102**) is illustrated.

To disengage the nose receptacle **2200** from the cage latch **1102**, the pull-tab **2402** on the pull-actuator **2202** is pulled away from the fiber optic module as illustrated. This causes a rounded edge **2702** on the latching surface **2414** of the pull-actuator **2202** to move against the ramped sliding surface **2508** of the pivot-arm actuator **2204**. In turn, the force exerted on the ramped sliding surface **2508** by the pull-actuator **2202** causes the pivot-arm actuator **2204** to rotate or pivot about its pivoting pin **2506** thereby disengaging the engaging triangle or latch **2502** from the cage latch opening **1105**.

The fiber optic module may then be withdrawn or removed from the cage assembly by continuing to pull on the pull-actuator **2202** or by pulling on the nose grips **714** or the nose receptacle **2202** of the fiber optic module.

Referring now to FIGS. **28A–28I**, yet another embodiment of the pull-actuator **2202'** is illustrated. In this embodiment, the pull-actuator **2202'** includes legs **2808** with end-stops **2820**. The end-stops **2820** prevent the pull-actuator **2202'** from moving beyond a certain point as it is pulled to release the fiber optic module from the cage assembly **1100**.

The pull-actuator **2202'** may include a first surface **2810** with edges **2830** that slide through grooves in the nose receptacle **2200'**.

FIGS. **29A–29I** illustrate yet another alternative embodiment of the pivot-arm actuator **2204'**. In this embodiment the pivot-arm actuator **2204'** further includes a spring **2912**. According to various embodiments the spring **2912** may be formed from the same material as the pivot-arm actuator **2204'** or it may be a separate component coupled to the pivot-arm actuator **2204'**. The spring **2912** may be any kind of spring including a coil spring, leaf spring, carriage spring, compression spring, conical spring, helical spring, volute spring, spiral spring, scragged spring, and other well known types of springs. The pivot-arm actuator **2204'** is pivotally coupled to the body of the nose receptacle **2200'** by means of a pivoting pin **2906**.

FIGS. **30A–30C** illustrate various cross-sectional views of a fiber optic module (nose assembly **2200'** and latching mechanism **2202'** and **2204'** shown) engaged or coupled to a cage assembly **1100** (cage latch portion **1102** is shown). These figures show a latching mechanism employing the pull-actuator **2202'** illustrated in FIGS. **28A–28I** and pivot-arm actuator **2204'** illustrated in FIGS. **29A–29I**.

While the fiber optic module is engaged to the cage assembly, the spring **2912** may provide some force to maintain the pivot-arm actuator **2204'** in an engaged position.

In the engaged position the end-stops **2820** of the pull-actuator **2202'** are separated from a stopping edge **3102** of the nose receptacle **2200'**.

FIGS. **31A–31C** illustrate how the pull-actuator **2202'** and pivot-arm actuator **2204'** operate when disengaging and withdrawing the fiber optic module (nose receptacle **2200'**) from its cage assembly **1100** (cage latch **1102** portion shown).

Pulling the pull-actuator **2202'** causes the pivot-arm actuator **2204'** to pivot or rotate as a result of the force exerted by the rounded edge **3104** of the pull-actuator **2202'** on the ramped sliding surface **2908** of the pivot-arm actuator **2204'**. As described above, this causes the engaging triangle **2902** to disengage from the cage assembly latch **1102** thereby disengaging the fiber optic module from the cage assembly.

When the pivot-arm actuator **2204'** rotates to disengage, the spring **2912** becomes compressed, thereby exerting an opposite force on the pivot-arm actuator **2204'**.

When the pulling force on the pull-actuator **2202'** is removed or ceases, the spring **2912** decompresses causing the pivot-arm actuator **2204'** to return to its initial position. The movement of the pivot-arm actuator **2204'** to its initial position causes pull-actuator **2202'** to be retracted into the fiber optic module to its initial position. This is because the ramped sliding surface **2908** exerts a retracting force on the rounded edge **3104** as it rotates or pivots back into its initial position within the catch or opening **2816**.

The end-stops **2820** serve to stop the pull-actuator **2202'** from being pulled too far out as the pull-actuator is pulled. The nose receptacle assembly **2200'** includes a stopping edge **3102** to stop the end-stops **2820** from moving beyond a certain point. The end-stops **2820**, or their equivalents, also permit the fiber optic module to be withdrawn from the cage assembly by continuing to pull on the pull-actuator **2202'**.

Referring now to FIGS. **32A–32I**, alternative embodiments of pull mechanisms for pull-actuators (i.e., **2202** or **2202'**) are illustrated. Only the pull-arm **3206** portion (equivalent to **1904** in FIG. **20**, **2406** in FIG. **24**, or **2806** in FIG. **28**) of the pull-actuator (i.e. **2202** or **2202'**) is shown.

FIG. **32A** shows a pull-actuator **2202A'** with a pivoting pull-ring **3202A** pivotally coupled to the pull-arm **3206**. The direction in which the pull-ring **3202A** pivots is indicated by the arrows. In this embodiment, the pull-ring **3202A** is horizontal with the pull-actuator **2202A'**. A user pulls on the pivot-ring **3202A** to retract the pull-actuator **2202A'**.

FIG. **32B** shows a pull-actuator **2202B'** with another pivoting pull-ring **3202B** pivotally coupled to the pull-arm **3206**. In this embodiment, the pull-ring **3202B** is vertical with the pull-actuator **2202B'**. The arrows indicate the direction in which the pull-ring **3202B** pivots. A user pulls on the pivoting pull-ring **3202B** to retract the pull-actuator **2202B'**.

FIG. **32C** shows a pull-actuator **2202C'** with a fixed pull-ring **3202C** coupled to the end of the pull-arm **3206**. The pull-ring **3202C** is horizontal with the pull-actuator **2202C'**. A user pulls on the pull-ring **3202C** to retract the pull-actuator **2202C'**.

FIG. **32D** shows a pull-actuator **2202D'** with another fixed pull-ring **3202D** coupled to the end of the pull-arm **3206**. The pull-ring **3202D** is vertical with the pull-actuator **2202D'**. A user pulls on the pull-ring **3202D** to retract the pull-actuator **2202D'**.

FIG. **32E** shows a pull-actuator **2202E'** with another fixed pull-ring **3202E** coupled to the end of the pull-arm **3206**. The

pull-ring **3202E** is at an angle to the pull-actuator **2202E'**. A user pulls on the pull-ring **3202E** to retract the pull-actuator **2202D'**.

FIG. **32F** shows a pull-actuator **2202F'** with pull-square **3202F** coupled to the end of the pull-arm **3206**. The pull-square **3202F** is horizontal with the pull-actuator **2202F'**. A user pulls on the pull-square **3202F** to retract the pull-actuator **2202F'**.

FIG. **32G** shows a pull-actuator **2202G'** with a pull-hook **3202G** at the end of the pull-arm **3206**. A user pulls on the pull-hook **3202G** to retract the pull-actuator **2202G'**.

FIG. **32H** shows a pull-actuator **2202H'** with a pull-button **3202H** coupled to the end of the pull-arm **3206**. A user pulls on the pull-button **3202H** to retract the pull-actuator **2202H'**.

FIG. **32I** shows a pull-actuator **2202I'** with a pull-knob **3202I** coupled to the end of the pull-arm **3206**. A user pulls on the pull-knob **3202I** to retract the pull-actuator **2202I'**.

FIGS. **32A–32I** provide some embodiments of pull-mechanisms for the pull-actuator (i.e. **2202** or **2202'**) and that other pull-mechanisms known to those skilled in the art may also be employed.

Referring now to FIGS. **33A–33D**, various views of a belly-to-belly mounting configuration for another embodiment of the invention is illustrated. The fiber optic module illustrated in FIGS. **32A–32D** employ pull-actuators **2202** and **2202'**, or their equivalents, illustrated in FIGS. **24** and **28**. In FIGS. **32A–32D**, the pull-actuators **2202A** and **2202B** are designed such that they do not interfere with each other when the fiber optic modules and their respective nose receptacles **2200A** and **2200B** are stacked as shown. This belly-to-belly configuration for fiber optic modules is described with reference to FIGS. **17A–17D** above; that description applies to fiber optic modules employing the pull-actuators (i.e., **2202** and **2202'**) described herein.

Referring now to FIGS. **34A–34I**, various views of a subassembly of a nose receptacle **3402** including a bail latch delatching mechanism for fiber optic modules is illustrated. The nose receptacle **3402** is portion of a mechanical subassembly of a fiber optic module but only the nose receptacle **3402** portion of the fiber optic module is shown in FIGS. **34A–34I**. The nose receptacle **3402**, also referred to as a nose, is an alternate embodiment to the nose receptacle or nose **151** in the fiber optic module **100** and the nose receptacle or nose **704** in the fiber optic modules **700**, **700'**, and **700''**.

The nose receptacle **3402** includes a bail latch **3404**, a pivoting pin **3406**, and an actuator **3408**. The bail latch **3404** includes a push tab, actuating tab, kick, or push mechanism **3410** for pushing on the actuator **3408** and disengaging the fiber optic module from a cage. With a fiber optic module engaged into a cage or module receptacle, the bail latch **3404** can be used to disengage and withdrawal the fiber optic module from the cage or receptacle, such as cage or receptacle **1100** illustrated in FIG. **11**. That is, the bail latch **3404** serves as the mechanical device to contact the actuator **3408** and push it to its forward position disengaging the locking tab or latch **1102** on the cage or receptacle **1100** from holding onto the locking triangle or boss **1002** of the nose or nose receptacle **3402**.

To disengage the fiber optic module from the cage or receptacle, the bail latch **3404** is first moved from an engaged position to a disengaged position. In one embodiment, the engaged position is a vertical position while the disengaged position is in a horizontal position. As discussed further below, other embodiments of the bail latch and the actuator may provide differing engaged and disen-

25

gaged positions with respect to the nose receptacle **3402** and the fiber optic module of which it is a part thereof. The fiber optic module is withdrawn by pulling out or backward on the bail latch **3404** of the nose receptacle **3402**. The bail latch **3404** provides sufficient grip and accesses the actuator **3408** for the de-latching for the withdrawing process of the fiber optic module from a cage or receptacle. In one embodiment, the nose receptacle **3402** is a part of an SFP fiber optic module for engaging an SFP cage.

Referring now to FIGS. **35A–35I** various views of a first embodiment of the bail latch **3404** including the pivoting pin **3406** for one embodiment of the invention are illustrated.

The bail latch **3404** includes a pair of pivot points or side tabs **3502**; the push tab, kick, or push mechanism **3410**; and a pulling arm or pull-handle **3504** coupled to a center member **3505** as shown and illustrated in FIGS. **35A–35I**. In one embodiment, these components of bail latch **3404** can hug along the front face and side face of the nose receptacle **3402** and form a G-like shape when viewed from the side. The pivot points or side tabs **3502** can each include a hole or opening **3506** to accept the pivot pin **3406**. The center axis of the two holes or openings **3506** in the side tabs **3502** is the axis of pivoting of the bail latch **3404** and hence the pivoting pin **3406** is located there at. During operation, the bail latch **3404** is rotatably coupled to the nose receptacle **3402** by the pivoting pin **3406**.

The pulling arm or pull-handle **3504** includes an opening **3412** which allows a finger to be inserted to pull out the fiber optic module when in an disengaged position. The opening **3412** also allows fiber optic plugs and optical fibers to be inserted into the nose receptacle **3402** when its in an engaged position. The pulling arm or pull handle **3504** may include a grip **3414** to ease grabbing the bail latch **3404** from an engaged position into a disengaged position. The bail latch **3404** can be formed out of metal, plastic (including a thermoplastic), thermosett, epoxy, or other solid materials.

The pivoting pin **3406**, which can also be referred to as a rod, is a long thin rod or cylinder of metal, thermoplastic, thermosett, epoxy or other solid material having an axis about which the bail latch can be rotated. The pivoting pin **3406** holds the bail latch rotatably coupled together to the nose receptacle **3402**. The pivoting pin serves as a pivoting device for bail latch **3404**. Secondly, the pivoting pin **3406** holds the bail latch coupled to the nose receptacle **3402** as shown in FIG. **3**. The nose receptacle **3402** includes a pair of openings or holes in each side or alternatively a long opening or hole through its body if solid at that point to accept the pivoting pin **3406**. Referring momentarily to FIGS. **38D** and **38E**, an opening **3801** in the left side of the nose receptacle **3402** is illustrated with the pivoting pin **3406** inserted therein.

Referring now to FIGS. **36A–36I**, various views of the actuator **3408** are illustrated. The actuator **3408** is somewhat similar to the structure and functionality of the actuator **706** previously described with reference to FIGS. **7A–14B** and the fiber optic modules described therein. In one embodiment, the actuator **3408** is a conventional actuator in conformance with the MSA Standard for SFP fiber optic modules. In other embodiments, the actuator **3408** may be tailored to appropriately couple with the bail latch **3404**. The actuator **3408** functions to disengage the fiber optic module from the cage **1100** when pushed by the push tab **2410** of the bail latch **3404**.

The actuator **3408** includes a butting surface **3601**; a pair of sliding guide slots or grooves **721** on each side; and one or more ramps, wedges or lifters (a pair of which are

26

illustrated) **1308**. The butting surface **3601** is part of the back side of the actuator **3408** while the ramps, wedges, or lifters **1308** are part of the front side of the actuator **3408**. The slot or grooves **721** on each side of the actuator **3408** have an opening at one end and a closure at an opposite end. The slot or grooves **721** slideably engage tangs **741** in the nose receptacle **3402**. While illustrated in FIGS. **34G** and **34F**, the tangs **741** of the nose receptacle **3402** are better illustrated in the exploded view of the nose receptacle **704** of FIG. **7B**. The butting surface **3601** of the actuator **3408** makes contact with the push tab **3410** of the bail latch **3404** when the fiber optic module is being disengaged. The one or more ramps, wedges, or lifters **1308** make contact with the latch **1102** of the cage **1100** to disengage the fiber optic module as is described below and in FIGS. **12**, **13A–13B**, and **14A–14B**. The actuator **3408** may be formed out of metal, thermoplastic, thermosett, epoxy or other solid material.

Referring now to FIGS. **37A–37E** and FIGS. **38A–38E**, various cross-sectional views of an integrated nose assembly and latching mechanism of FIGS. **34A–34I** in the engaged position and the disengaged position respectively for one embodiment of the invention are illustrated.

In FIGS. **37A–37E**, the bail latch **3404** in an upright, closed, or engaged position. That is, the fiber optic module can be securely engaged with the cage with the bail latch **3404** in this position. The fiber optic module can be pushed into the cage **1100** with the bail latch **3404** in its upright, closed, or engaged position. With the bail latch **3404** in its upright, closed, or engaged position, the actuator **3408** and its ramps, wedges, or lifters **1308** can be in a backward, locking or engaging position well away from the boss or locking triangle **1002** in the nose receptacle **3402**. This allows the boss or locking triangle **1002** in the nose receptacle **3402** to mate or engage into the opening or catch **1105** in the latch **1102**. The bail latch **3404** can be pulled on as shown by the force arrow **3701** to cause it to first rotate around the axis of the pivoting pin **3406** as illustrated by the arrow **3702**. As the bail latch **3404** rotates from its an upright, closed, or engaged position, a user can insert the same finger into the opening **3412** of the pull handle **3414** in order to continue pulling outward on the fiber optic module.

In FIGS. **38A–38E**, the bail latch **3404** is in a horizontal, open, or disengaged position. The bent portion of handle **3414** allows a user to keep the finger in the opening **3412** and continue pulling outward on the fiber optic module even when its in the horizontal, open, or disengaged position. By pulling on the bail latch **3404**, the bail latch can first rotate around the axis along the bottom portion of the nose receptacle **3402**. As the bail latch **3404** rotates, the push tab **3410** of the bail latch **3404** extends gradually forward. The extension of push tab **3410** comes in contact with the butting surface **3601** of the actuator **3408** to slide it forward towards the latch **1102** of the cage **1100**. The forward thrust of the actuator **3408** causes the ramps **1308** to push out on the latch **1102** freeing the boss or triangle **1002** from the opening **1102** in the cage **1000** to disengage the fiber optic module from the cage **1100**. In an alternate embodiment, the cage may include a boss or locking triangle which is pushed out of a hole or opening in the nose receptacle to disengage the fiber optic module from the cage. A continuous pulling action, as illustrated by the pull force **3802** on the bail latch **3404**, can withdraw the fiber optic module fully out of the cage. In this manner a single continuous pulling action on the bail latch **3404** can disengage and withdraw the fiber optic module out of the cage. With the bail latch **3404** in its horizontal, open, or disengaged position, it can be easily be returned to its upright, closed, or engaged position within or without the

cage **1100** by using an opposite force. Alternatively, the bail latch **3404** could be spring loaded by including a spring to return it to its upright, closed, or engaged position on its own.

The action of the actuator **3408** is similar to that of the actuator **706** and the one or more ramps, wedges, or lifters **1308** as described with respect to FIGS. **12**, **13A–13B**, and **14A–14B**.

FIGS. **39A–39H** illustrate various views of alternate embodiments of the bail latch **3404** as well as other delatching mechanisms that can function similar to the bail latch **3404** with a push tab **3410**.

FIG. **39A** illustrates a bail latch **3404A** in which the pivot pin **3406** is replaced with two smaller pins **3406A'** that do not extend across the width of the bail latch **3404A'**. The bail latch **3404A'** includes the actuating tab **3410**.

FIG. **39B** illustrates a latch **3404B'** with a partial pull arm **3504B'** coupled to a lever **3901** instead of a complete bail latch pull arm. The bail latch **3404B'** may include a pair of pivot pins **3406B'** instead of the pivot pin **3406**.

FIG. **39C** illustrates a latch **3404C'** with a partial pull arm (as in FIG. **39B**) with a long pivot pin **3406C'** coupled to the latch **3404C'** at only one side.

FIG. **39D** illustrates a bail latch **3404D'** with an enclosed pull arm **3504D'** with no angles. The latch **3404D'** further includes another embodiment of the actuating tab **3410D'** where the tab has an oval or circular tip to slide on the butting surface **3601** and release the fiber optic module. The actuating tab **3410D'** is narrower than the first actuating tab **3410**.

FIG. **39E** illustrates a bail latch **3404E'** with a semi-circular pull arm **3504E'**.

FIG. **39F** illustrates a latch **3404F'**, with just a lever arm **3504F'** to release the fiber optic module from the cage assembly.

FIG. **39G** illustrates a latch **3404G'** with pivoting conical retainers **3406G'** instead of pivot pins to couple the latch **3404G'** to the fiber optic module.

FIG. **39H** illustrates a bail latch **3404H'** with holes **3902** rather than pins. The fiber optic module or nose receptacle provides pins or protrusions which fit through the holes **3902** to pivotally couple the latch **3404H'** to the fiber optic module.

Referring now to FIGS. **40A–40I** various views of how the bail-latch delatching mechanism would function in a belly-to-belly mounting configuration for another embodiment of the invention. A first fiber optic module and a second fiber optic module can be engaged into cages in a belly to belly configuration in which case a first nose receptacle **3402A** would be adjacent and parallel to a second nose receptacle **3402B** as illustrated in FIGS. **40A–40I**. The bail latch de-latching mechanism can be designed to functional at extreme close gap condition when using a belly to belly mounting configuration as illustrated if FIGS. **40A–40I**. That is, the distance between top and bottom cages or receptacles can be less than 1.0 millimeter and allow the bail latches **3404A** and **3404B** of the first and second nose receptacles **3402A** and **3402B** respectively to properly function into an open or closed position.

While FIGS. **40A–40I** illustrate only the first bail latch **3404A** being in an open or engaged position, either the first or second bail latches **3404A** or **3404B** can be opened or in a disengaged position. Alternatively, both the top or bottom bail latches **3404A** and **3404B** can be opened or disengaged for some reason if desired. This belly-to-belly configuration

for fiber optic modules is described further with reference to FIGS. **17A–17D** above; that description applies to fiber optic modules employing the bail latch delatching mechanism of the nose receptacle **3402** described herein.

The invention has a number of advantages over the prior art that will be recognized by those of ordinary skill in the art after thoroughly reading this disclosure.

While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this invention not be limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those ordinarily skilled in the art. While the invention has been described in particular embodiments, the invention should not be construed as limited by such embodiments.

What is claimed is:

1. A fiber optic module comprising:

a pull-actuator to disengage and withdraw the fiber optic module from a cage assembly, the pull-actuator includes
a pull-tab,
a shaft coupled to the pull tab at a first end, and
an opening at a second end of the shaft to engage a first end of a pivot arm;

and

one or more electro-optic transducers to convert optical signals into electrical signals or electrical signals into optical signals.

2. The fiber optic module of claim 1 wherein

the fiber optic module is a small form pluggable (SFP) fiber optic module and the cage assembly is a small form pluggable (SFP) cage assembly.

3. The fiber optic module of claim 1 wherein

the pull-actuator is activated to disengage and withdraw the fiber optic module by a single backward pull action.

4. The fiber optic module of claim 1 wherein

the pull-actuator further includes
one or more grooves to slideably engage the fiber optic module.

5. The fiber optic module of claim 1 wherein

the fiber optic module includes one or more grooves to slideably engage the pull-actuator.

6. The fiber optic module of claim 1 wherein

the pull-actuator slides to disengage the fiber optic module from the cage assembly.

7. The fiber optic module of claim 1 wherein

the pull-actuator further includes,
one or more end-stops to withdraw the fiber optic module as the pull-actuator is pulled.

8. The fiber optic module of claim 1 wherein

the pull-actuator further includes
one or more end-stops to prevent the pull-actuator from becoming disengaged from the fiber optic module as it is pulled.

9. The fiber optic module of claim 1 wherein

the pull-actuator further includes
an orientation indicator to indicate the fiber optic module which the pull-actuator releases.

10. The fiber optic module of claim 1 wherein the pull-actuator is formed of metal.

11. The fiber optic module of claim 1 wherein

the pull-actuator is formed of a plastic.

29

12. The fiber optic module of claim 1 wherein the pull-actuator permits arranging multiple fiber optic modules in a belly-to-belly configuration without obstructing adjacent pull-actuators.
13. The fiber optic module of claim 12 wherein with the belly-to-belly configuration, two pull-actuators are located in proximity to each other along a common surface between two fiber optic modules.
14. A fiber optic module comprising:
a pull-actuator to disengage and withdraw the fiber optic module from a cage assembly;
a pivot-arm actuator, pivotally coupled to the fiber optic module, to release the fiber optic module from the cage assembly when the pull-actuator is pulled; and
one or more electro-optic transducers to convert optical signals into electrical signals or electrical signals into optical signals.
15. The fiber optic module of claim 14 wherein the pivot-arm actuator further includes,
a pivoting pin to rotationally couple the pivot-arm actuator to the fiber optic module.
16. The fiber optic module of claim 14 wherein the pivot-arm actuator includes
a first engaging end to engage to the cage assembly,
a second engaging end to engage to the pull-actuator, and
a shaft coupling to the first and second engaging ends.
17. The fiber optic module of claim 16 wherein the first engaging end includes a keeper to engage the fiber optic module to the cage assembly.
18. The fiber optic module of claim 16, wherein the first engaging end includes a latch to engage the fiber optic module to the cage assembly.
19. The fiber optic module of claim 18 wherein the second engaging end includes a keeper to engage the pivot-arm actuator to the pull-actuator.
20. The fiber optic module of claim 18 wherein the second engaging end includes a latch to engage the pivot-arm actuator to the pull-actuator.
21. The fiber optic module of claim 16 wherein the second engaging end includes a ramped sliding surface to slide and cause the pivot-arm actuator to rotate when the pull-actuator is pulled.
22. The fiber optic module of claim 14 further comprising:
a spring to cause the pivot-arm actuator to return to its initial position when the pulling force on the pull-actuator is removed.
23. The fiber optic module of claim 22 wherein the spring is a leaf spring and part of the pivot-arm actuator.
24. The fiber optic module of claim 22 wherein the spring causes the pull-actuator to return to its initial position when the pulling force on the pull-actuator is removed.
25. A fiber optic module comprising:
means for converting optical signals into electrical signals or electrical signals into optical signals;
means for disengaging the fiber optic module from a cage assembly by pulling a pull-actuator and
means for pivotally disengaging the fiber optic module from the cage assembly when the pull-actuator is pulled.
26. The fiber optic module of claim 25 further comprising:
means for coupling the pivotally disengaging means to the fiber optic module.
27. The fiber optic module of claim 25 further comprising:
means for slideably engaging the means for disengaging the fiber optic module.

30

28. The fiber optic module of claim 25 wherein the means for disengaging also provides a means for withdrawing.
29. The fiber optic module of claim 25 further comprising:
means for withdrawing the fiber optic module.
30. The fiber optic module of claim 25 further comprising:
means for indicating the fiber optic module which the means for disengaging releases.
31. A fiber optic module comprising:
a nose receptacle including
a fiber optic cable receptacle to receive one or more fiber optic cable plugs,
a pull-actuator to release the fiber optic module from a cage assembly using a pull action;
a pivot-arm actuator coupled to the pull-actuator, the pivot-arm actuator to pivot and release a keeper from a latch to release the fiber optic module in response to a pull action on the pull-actuator; and
a printed circuit board including one or more electro-optic transducers to convert optical signals into electrical signals or electrical signals into optical signals.
32. The fiber optic module of claim 31 wherein, the fiber optic module is a small form pluggable (SFP) fiber optic module and the cage assembly is a small form pluggable (SFP) cage assembly.
33. The fiber optic module of claim 31 further comprising:
a housing to couple to the nose receptacle and cover the printed circuit board.
34. The fiber optic module of claim 33 wherein, the housing is shielded to protect the printed circuit board from electromagnetic interference.
35. The fiber optic module of claim 31 wherein, the pull-actuator includes one or more grooves to slideably engage the nose receptacle.
36. The fiber optic module of claim 31 wherein, the pull-actuator slides outward to release the fiber optic module from the cage assembly.
37. The fiber optic module of claim 31 wherein, the pivot-arm-actuator includes
a pivot pin rotationally coupled to the nose receptacle at first and second ends to allow the pivot-arm actuator to pivot.
38. The fiber optic module of claim 31 wherein the nose receptacle further includes
a spring coupled to the pivot-arm-actuator at a first end and the nose receptacle at a second end, the spring to exert a force on the pivot-arm-actuator to exert a return force on the pull-actuator.
39. The fiber optic module of claim 31 wherein, the pull-actuator includes
an orientation indicator to indicate the fiber optic module which the pull-actuator releases.
40. The fiber optic module of claim 31 wherein, the pull-actuator includes
a pull-tab,
a shaft coupled to the pull-tab at a first end, and
a catch at a second end of the shaft.
41. The fiber optic module of claim 31 where the pull-actuator is located at a bottom side of the fiber optic module.
42. The fiber optic module of claim 31 wherein, the nose receptacle further includes
a grip to pull out on the fiber optic module.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,796,715 B2
DATED : September 28, 2004
INVENTOR(S) : Chiu et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 29,

Line 11, "a case assembly" should read -- a cage assembly --.

Column 30,

Line 60, "claim 31 where" should read -- claim 31 wherein --.

Signed and Sealed this

Fourth Day of October, 2005

A handwritten signature in black ink on a light gray dotted background. The signature is written in a cursive style and reads "Jon W. Dudas".

JON W. DUDAS

Director of the United States Patent and Trademark Office