



US011061190B2

(12) **United States Patent**
Takano et al.

(10) **Patent No.:** **US 11,061,190 B2**
(45) **Date of Patent:** ***Jul. 13, 2021**

(54) **SMALL FORM FACTOR FIBER OPTIC
CONNECTOR WITH MULTI-PURPOSE
BOOT ASSEMBLY**

(58) **Field of Classification Search**
CPC G02B 6/378
See application file for complete search history.

(71) Applicant: **Senko Advanced Components Inc.**,
Marlborough, MA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

585,194 A 6/1897 Favor
678,283 A 7/1901 Schaefer
(Continued)

(72) Inventors: **Kazuyoshi Takano**, Tokyo (JP); **Jimmy
Jun-Fu Chang**, Worcester, MA (US)

(73) Assignee: **Senko Advanced Components, Inc.**,
Marlborough, MA (US)

FOREIGN PATENT DOCUMENTS

CA 2495693 4/2004
CN 2836038 Y 11/2006
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

OTHER PUBLICATIONS

(21) Appl. No.: **16/782,196**

PCT/US2018/062406 International Search Report dated Mar. 18,
2019.

(22) Filed: **Feb. 5, 2020**

(Continued)

(65) **Prior Publication Data**

US 2020/0209487 A1 Jul. 2, 2020

Primary Examiner — Eric Wong

Related U.S. Application Data

(60) Division of application No. 16/368,828, filed on Mar.
28, 2019, now Pat. No. 10,705,300, and a
(Continued)


(57) **ABSTRACT**

An optical connector holding two or more LC-type optical
ferrules is provided. The optical connector includes an outer
body, an inner front body accommodating the two or more
LC-type optical ferrules, ferrule springs for urging the
optical ferrules towards a mating connection, and a back
body for supporting the ferrule springs. A removable inner
front body for polarity change is disclosed. A multi-purpose
rotatable boot assembly for polarity change is disclosed. The
multi-purpose boot assembly can be pushed and pulled to
insert and remove the micro connector from an adapter
receptacle.

(51) **Int. Cl.**
G02B 6/38 (2006.01)
G02B 6/42 (2006.01)
G02B 6/40 (2006.01)

(52) **U.S. Cl.**
CPC **G02B 6/387** (2013.01); **G02B 6/3825**
(2013.01); **G02B 6/3879** (2013.01);
(Continued)

20 Claims, 32 Drawing Sheets

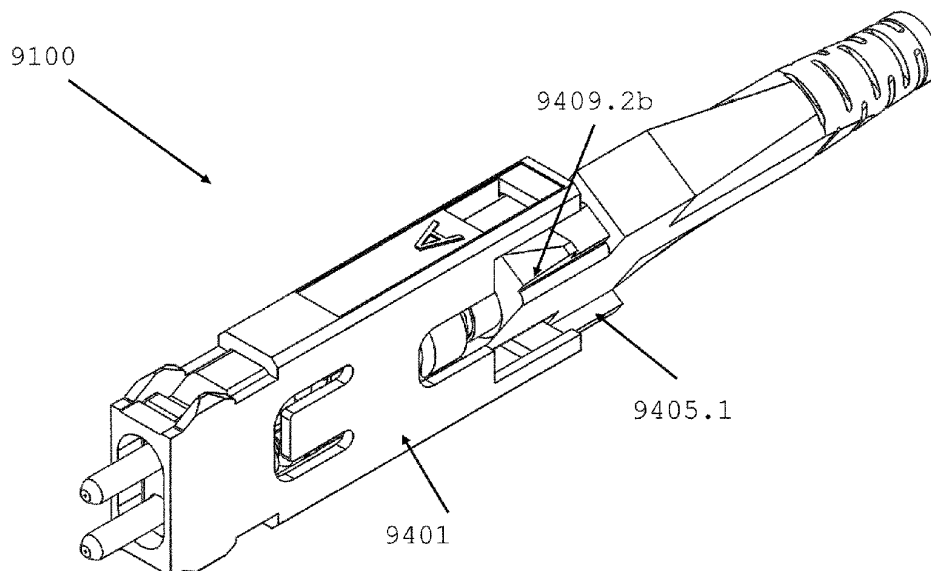

US Conec EX1001
IPR2024-00122
U.S. Patent No. 11,061,190

Related U.S. Application Data

continuation of application No. 16/103,555, filed on Aug. 14, 2018, now Pat. No. 10,718,911, which is a continuation-in-part of application No. 16/035,691, filed on Jul. 15, 2018, now Pat. No. 10,281,668.

- (60) Provisional application No. 62/649,539, filed on Mar. 28, 2018, provisional application No. 62/588,276, filed on Nov. 17, 2017, provisional application No. 62/549,655, filed on Aug. 24, 2017, provisional application No. 62/532,710, filed on Jul. 14, 2017.

- (52) **U.S. Cl.**

CPC *G02B 6/3887* (2013.01); *G02B 6/3893* (2013.01); *G02B 6/403* (2013.01); *G02B 6/406* (2013.01); *G02B 6/4292* (2013.01); *G02B 6/3821* (2013.01)

- (56) **References Cited**

U.S. PATENT DOCUMENTS

681,132 A 8/1901 Norton
3,721,945 A 3/1973 Hults
4,150,790 A 4/1979 Potter
4,240,695 A 12/1980 Evans
4,327,964 A 5/1982 Haesly et al.
4,478,473 A 10/1984 Frear
4,762,388 A 8/1988 Tanaka
4,764,129 A 8/1988 Jones
4,840,451 A 6/1989 Sampson
4,872,736 A 10/1989 Myers
4,979,792 A 12/1990 Weber
5,026,138 A 6/1991 Boudreau
5,031,981 A 7/1991 Peterson
5,041,025 A 8/1991 Haitmanek
5,073,045 A 12/1991 Abendschein
D323,143 S 1/1992 Ohkura et al.
5,101,463 A 3/1992 Cubukciyan
5,146,813 A 9/1992 Stanfill, Jr.
5,159,652 A 10/1992 Grassin D'Alphonse
5,212,752 A 5/1993 Stephenson et al.
5,265,181 A 11/1993 Chang
5,289,554 A 2/1994 Cubukciyan
5,315,679 A 5/1994 Baldwin
5,317,663 A 5/1994 Beard
5,321,784 A 6/1994 Cubukciyan
5,335,301 A 8/1994 Newman
5,348,487 A 9/1994 Marazzi
5,418,875 A 5/1995 Nakano
5,444,806 A 8/1995 de Marchi
5,481,634 A 1/1996 Anderson
5,506,922 A 4/1996 Grois
5,521,997 A 5/1996 Rovenolt
5,570,445 A 10/1996 Chou
5,588,079 A 12/1996 Tanabe
5,602,951 A 2/1997 Shiota
5,684,903 A 11/1997 Kyomasu
5,687,268 A 11/1997 Stephenson
5,781,681 A 7/1998 Manning
5,845,036 A 12/1998 De Marchi
5,862,282 A 1/1999 Matsuura
5,915,987 A 6/1999 Reed
5,930,426 A 7/1999 Harting
5,937,130 A 8/1999 Amberg
5,953,473 A 9/1999 Shimotsu et al.
5,956,444 A 9/1999 Duda et al.
5,971,626 A 10/1999 Knodell
6,041,155 A 3/2000 Anderson
6,049,040 A 4/2000 Biles
6,095,862 A 8/2000 Doye
6,134,370 A 10/2000 Childers
6,178,283 B1 1/2001 Weigel
RE37,080 E 3/2001 Stephenson
6,206,577 B1 3/2001 Hall, III

6,206,581 B1 3/2001 Driscoll
6,227,717 B1 5/2001 Ott
6,238,104 B1 5/2001 Yamakawa
6,240,228 B1 5/2001 Chen
6,247,849 B1 6/2001 Liu
6,250,817 B1 6/2001 Lampert
6,276,840 B1 8/2001 Weiss
6,318,903 B1 11/2001 Andrews
6,364,537 B1 4/2002 Maynard
6,379,052 B1 4/2002 de Jong
6,422,759 B1 7/2002 Kevern
6,447,170 B1 9/2002 Takahashi et al.
6,450,695 B1 9/2002 Matsumoto
6,461,054 B1 10/2002 Iwase
6,471,412 B1 10/2002 Belenkiy
6,478,472 B1 11/2002 Anderson
6,485,194 B1 11/2002 Shirakawa
6,527,450 B1 3/2003 Miyachi
6,530,696 B1 3/2003 Ueda
6,551,117 B2 4/2003 Poplawski
6,565,262 B2 5/2003 Childers
6,572,276 B1 6/2003 Theis
6,579,014 B2 6/2003 Melton
6,585,194 B1 7/2003 Brushwood
6,623,172 B1 9/2003 de Jong et al.
6,634,796 B2 10/2003 de Jong
6,634,801 B1 10/2003 Waldron
6,648,520 B2 11/2003 McDonald
6,668,113 B2 12/2003 Togami
6,682,228 B2 1/2004 Rathnam
6,685,362 B2 2/2004 Burkholder
6,695,486 B1 2/2004 Falkenberg
6,817,272 B2 11/2004 Holland
6,854,894 B1 2/2005 Yunker
6,869,227 B2 3/2005 Del Grosso
6,872,039 B2 3/2005 Baus
6,935,789 B2 8/2005 Gross, III
7,036,993 B2 5/2006 Luther et al.
7,052,186 B1 5/2006 Bates
7,077,576 B2 7/2006 Luther
7,090,406 B2 8/2006 Melton et al.
7,090,407 B2 8/2006 Melton et al.
7,091,421 B2 8/2006 Kukita
7,111,990 B2 9/2006 Melton et al.
7,113,679 B2 9/2006 Melton et al.
D533,504 S 12/2006 Lee
D534,124 S 12/2006 Taguchi
7,150,567 B1 12/2006 Luther
7,153,041 B2 12/2006 Mine
7,198,409 B2 4/2007 Smith
7,207,724 B2 4/2007 Gurreri
D543,124 S 5/2007 Raatikainen
D543,146 S 5/2007 Chen et al.
7,258,493 B2 8/2007 Milette
7,264,402 B2 9/2007 Theuerkorn
7,281,859 B2 10/2007 Mudd
7,297,013 B2 11/2007 Caveney et al.
D558,675 S 1/2008 Chien et al.
7,315,682 B1 1/2008 En Lin
7,325,976 B2 2/2008 Gurreri
7,325,980 B2 2/2008 Pepe
7,329,137 B2 2/2008 Martin
7,331,718 B2 2/2008 Yazaki
7,354,291 B2 4/2008 Caveney
7,371,082 B2 5/2008 Zimmel
7,387,447 B2 6/2008 Mudd
7,390,203 B2 6/2008 Murano
D572,661 S 7/2008 En Lin et al.
7,431,604 B2 10/2008 Waters
7,463,803 B2 12/2008 Cody
7,465,180 B2 12/2008 Kusuda
7,473,124 B1 1/2009 Briant
7,504,666 B2 3/2009 Vittu
7,507,103 B1 3/2009 Phillips et al.
7,510,335 B1 3/2009 Su
7,513,695 B1 4/2009 Lin
7,534,128 B2 5/2009 Caveney
7,540,666 B2 6/2009 Luther
7,561,775 B2 7/2009 Lin et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,588,373	B1	9/2009	Sato	10,067,301	B2	9/2018	Murray
7,591,595	B2	9/2009	Lu	10,107,972	B1	10/2018	Gniadek
7,594,766	B1	9/2009	Sasser	10,114,180	B2	10/2018	Suzic
7,641,398	B2	1/2010	O'Riorden	10,146,011	B2	12/2018	Nhep
7,651,361	B2	1/2010	Henry	10,185,099	B2	1/2019	Chang et al.
7,695,199	B2	4/2010	Teo	10,444,444	B2	10/2019	Ma et al.
7,699,533	B2	4/2010	Milette	2002/0168148	A1	11/2002	Gilliland
7,712,970	B1	5/2010	Lee	2002/0172467	A1	11/2002	Anderson et al.
7,717,625	B2	5/2010	Margolin	2002/0191919	A1	12/2002	Nolan
7,785,019	B2	8/2010	Lewallen et al.	2003/0053787	A1	3/2003	Lee
7,824,113	B2	11/2010	Wong	2003/0063862	A1	4/2003	Fillion
7,837,395	B2	11/2010	Lin	2003/0157825	A1	8/2003	Kane
D641,708	S	7/2011	Yamauchi	2004/0052473	A1	3/2004	Seo
8,083,450	B1	12/2011	Smith	2004/0109646	A1	6/2004	Anderson
8,152,385	B2	4/2012	de Jong	2004/0136657	A1	7/2004	Ngo
8,186,890	B2	5/2012	Lu	2004/0141693	A1	7/2004	Szilagyi
8,192,091	B2	6/2012	Hsu	2004/0161958	A1	8/2004	Togami
8,202,009	B2	6/2012	Lin	2004/0234209	A1	11/2004	Cox
8,221,007	B2	7/2012	Peterhans	2004/0247252	A1	12/2004	Ehrenreich
8,251,733	B2	8/2012	Wu	2005/0036744	A1	2/2005	Caveney
8,267,595	B2	9/2012	Lin	2005/0111796	A1	5/2005	Matasek
8,270,796	B2	9/2012	Nhep	2005/0141817	A1	6/2005	Yazaki et al.
8,408,815	B2	4/2013	Lin	2005/0207709	A1	9/2005	Del Grosso et al.
8,414,196	B2	4/2013	Lu	2006/0013539	A1	1/2006	Thaler
8,465,317	B2	6/2013	Gniadek	2006/0076061	A1	4/2006	Bush
8,534,928	B2	9/2013	Cooke	2006/0089049	A1	4/2006	Sedor
8,550,728	B2	10/2013	Takahashi	2006/0127025	A1	6/2006	Haberman
8,556,645	B2	10/2013	Crain	2006/0140453	A1	6/2006	Geng
8,559,781	B2	10/2013	Childers	2006/0153503	A1	7/2006	Suzuki
8,622,634	B2	1/2014	Arnold	2006/0160429	A1	7/2006	Dawiedczyk
8,636,424	B2	1/2014	Kuffel	2006/0193562	A1	8/2006	Theuerkorn
8,641,293	B2	2/2014	Lin et al.	2006/0269194	A1	11/2006	Luther et al.
8,651,749	B2	2/2014	Dainese Júnior	2006/0274411	A1	12/2006	Yamauchi
8,676,022	B2	3/2014	Jones	2007/0025665	A1	2/2007	Dean
8,678,670	B2	3/2014	Takahashi	2007/0028409	A1	2/2007	Yamada
8,727,638	B2	5/2014	Lee	2007/0079854	A1	4/2007	You
8,757,894	B2	6/2014	Katoh	2007/0098329	A1	5/2007	Shimoji
8,764,308	B2	7/2014	Irwin	2007/0149028	A1	6/2007	Yu
8,770,863	B2	7/2014	Cooke	2007/0149062	A1	6/2007	Long
8,869,661	B2	10/2014	Opstad	2007/0230874	A1	10/2007	Lin
8,998,305	B2	4/2015	Obata et al.	2007/0232115	A1	10/2007	Burke
9,028,270	B1	5/2015	Vanderwoud	2007/0243749	A1	10/2007	Wu
9,052,474	B2	6/2015	Jiang	2008/0008430	A1	1/2008	Kewitsch
9,063,296	B2	6/2015	Dong	2008/0012986	A1	1/2008	Tai
9,250,402	B2	2/2016	Ishii	2008/0044137	A1	2/2008	Luther
9,310,569	B2	4/2016	Lee	2008/0056647	A1	3/2008	Margolin
9,366,829	B2	6/2016	Czosnowski	2008/0064334	A1	3/2008	Hamadi
9,411,110	B2	8/2016	Barnette, Jr.	2008/0069501	A1	3/2008	Mudd et al.
9,448,370	B2	9/2016	Xue	2008/0101757	A1	5/2008	Lin et al.
9,465,172	B2	10/2016	Shih	2008/0226237	A1	9/2008	O'Riorden
9,485,194	B2	11/2016	Singla et al.	2008/0267566	A1	10/2008	En Lin
9,486,136	B2	11/2016	Bone	2009/0022457	A1	1/2009	de Jong
9,494,744	B2	11/2016	de Jong	2009/0028507	A1	1/2009	Jones
9,548,557	B2	1/2017	Liu	2009/0047818	A1	2/2009	Irwin
9,551,842	B2	1/2017	Theuerkorn	2009/0092360	A1	4/2009	Lin et al.
9,557,495	B2	1/2017	Raven	2009/0135787	A1	5/2009	Uemura et al.
9,568,686	B2	2/2017	Fewkes	2009/0176401	A1	7/2009	Gu
9,581,768	B1	2/2017	Baca	2009/0196555	A1	8/2009	Lin
9,599,778	B2	3/2017	Wong et al.	2009/0214162	A1	8/2009	O'Riorden
9,658,409	B2	5/2017	Gniadek	2009/0290938	A1	11/2009	Asaoka
9,678,283	B1	6/2017	Chang	2010/0034502	A1	2/2010	Lu et al.
9,684,130	B2 *	6/2017	Veatch G02B 6/3831	2010/0054668	A1	3/2010	Nelson
9,684,313	B2	6/2017	Chajec	2010/0061069	A1	3/2010	Cole
9,709,753	B1	7/2017	Chang	2010/0092136	A1	4/2010	Nhep
9,778,425	B2	10/2017	Nguyen	2010/0220961	A1	9/2010	de Jong
9,798,084	B2	10/2017	Verslegers et al.	2010/0239220	A1	9/2010	Lin et al.
9,829,644	B2	11/2017	Nguyen et al.	2010/0247041	A1	9/2010	Szilagyi
9,829,645	B2	11/2017	Good	2010/0267742	A1	10/2010	Plate
9,829,653	B1	11/2017	Nishiguchi	2010/0284656	A1	11/2010	Morra
9,869,825	B2	1/2018	Bailey	2010/0322561	A1	12/2010	Lin et al.
9,880,361	B2	1/2018	Childers	2011/0044588	A1	2/2011	Larson
9,946,035	B2	4/2018	Gustafson	2011/0045683	A1	2/2011	Foung
9,971,103	B2	5/2018	De Jong et al.	2011/0058773	A1	3/2011	Peterhans
9,989,711	B2	6/2018	Ott	2011/0131801	A1	6/2011	Nelson
10,031,296	B2	7/2018	Good	2011/0155810	A1	6/2011	Taniguchi
				2011/0177710	A1	7/2011	Tobey
				2011/0239220	A1	9/2011	Gibson
				2011/0299814	A1 *	12/2011	Nakagawa G02B 6/3879

(56)

References Cited**U.S. PATENT DOCUMENTS**

2012/0099822 A1 4/2012 Kuffel et al.
 2012/0155810 A1 6/2012 Nakagawa
 2012/0162385 A1 6/2012 Park et al.
 2012/0189260 A1 7/2012 Kowalczyk
 2012/0237177 A1 9/2012 Minota
 2012/0259429 A1 10/2012 Han et al.
 2012/0269485 A1 10/2012 Haley
 2012/0301080 A1 11/2012 Gniadek
 2012/0308183 A1 12/2012 Irwin
 2012/0328248 A1 12/2012 Larson
 2013/0019423 A1 1/2013 Slutkowski
 2013/0071067 A1 3/2013 Lin
 2013/0089995 A1 4/2013 Gniadek et al.
 2013/0094816 A1 4/2013 Lin
 2013/0101258 A1 4/2013 Hikosaka
 2013/0121653 A1 5/2013 Shitama
 2013/0170797 A1 7/2013 Ott
 2013/0183012 A1 7/2013 Cabanne Lopez
 2013/0216185 A1 8/2013 Klavuhn
 2013/0308915 A1 11/2013 Buff
 2013/0322825 A1 12/2013 Cooke et al.
 2014/0016901 A1 1/2014 Lambourn
 2014/0023322 A1 1/2014 Gniadek
 2014/0028527 A1 1/2014 Becker et al.
 2014/0050446 A1 2/2014 Chang
 2014/0056562 A1 2/2014 Limbert
 2014/0133808 A1 5/2014 Hill
 2014/0169727 A1 6/2014 Veatch
 2014/0182351 A1 7/2014 Miller et al.
 2014/0219621 A1 8/2014 Barnette, Jr.
 2014/0226946 A1 8/2014 Cooke
 2014/0241644 A1 8/2014 Kang
 2014/0241678 A1 8/2014 Bringuier
 2014/0241688 A1 8/2014 Isenhour
 2014/0334780 A1 11/2014 Nguyen
 2014/0348477 A1 11/2014 Chang
 2015/0003788 A1 1/2015 Chen
 2015/0111417 A1 4/2015 Vanderwoud
 2015/0191024 A1 4/2015 Tu et al.
 2015/0177463 A1 6/2015 Lee
 2015/0198766 A1 7/2015 Takahashi
 2015/0212282 A1 7/2015 Lin
 2015/0220917 A1 8/2015 Algreatly
 2015/0241644 A1 8/2015 Lee
 2015/0301294 A1 10/2015 Chang
 2015/0331201 A1 11/2015 Takano
 2015/0355417 A1 12/2015 Takano
 2015/0370021 A1 12/2015 Chan
 2015/0378113 A1 12/2015 Good et al.
 2016/0116685 A1 4/2016 Wong et al.
 2016/0131849 A1 5/2016 Takano
 2016/0139343 A1 5/2016 Dean, Jr.
 2016/0148741 A1 5/2016 Krtamura
 2016/0161681 A1 6/2016 Banal, Jr.
 2016/0172852 A1 6/2016 Tamura
 2016/0178852 A1 6/2016 Takano et al.
 2016/0195682 A1 7/2016 Takano et al.
 2016/0231512 A1 8/2016 Seki
 2016/0259135 A1 9/2016 Gniadek
 2016/0266326 A1 9/2016 Gniadek
 2016/0291262 A1 10/2016 Chang et al.
 2016/0320572 A1 11/2016 Gniadek
 2016/0349458 A1 12/2016 Murray
 2016/0370545 A1 12/2016 Jiang
 2017/0003458 A1 1/2017 Gniadek
 2017/0023746 A1 1/2017 Good
 2017/0176691 A1 6/2017 Childers et al.
 2017/0205587 A1 7/2017 Chang
 2017/0205590 A1 7/2017 Bailey
 2017/0205591 A1 7/2017 Takano
 2017/0212313 A1 7/2017 Elenabaas
 2017/0212316 A1 7/2017 Takano
 2017/0254961 A1 9/2017 Kamada
 2017/0276275 A1 9/2017 Beemer
 2017/0276887 A1 9/2017 Allen

2017/0293088 A1 10/2017 Manes et al.
 2017/0293089 A1 10/2017 Gustafson et al.
 2017/0343740 A1 11/2017 Nguyen
 2018/0128988 A1 5/2018 Chang
 2018/0156988 A1 6/2018 Gniadek
 2018/0172923 A1 6/2018 Bauco
 2018/0217339 A1 8/2018 Ma et al.
 2018/0217340 A1 8/2018 Livong et al.
 2018/0252872 A1 9/2018 Chen
 2018/0341069 A1 11/2018 Takano
 2019/0204513 A1 7/2019 Davidson

FOREIGN PATENT DOCUMENTS

CN 201383588 Y 1/2010
 CN 202600189 U 12/2012
 DE 19507669 A1 9/1996
 DE 19507669 C2 10/1998
 DE 202006011910 U1 4/2007
 DE 102006019335 A1 10/2007
 EP 1211537 A2 6/2002
 EP 1211537 A3 6/2002
 EP 1245980 A2 10/2002
 EP 1245980 A3 4/2004
 EP 1566674 A1 8/2005
 EP 1245980 B1 6/2006
 EP 1074868 B1 9/2007
 EP 1566674 B1 5/2009
 GB 2111240 A 6/1983
 GB 2111240 B 9/1985
 JP 2000089059 A 3/2000
 JP 03752331 B2 3/2006
 JP 2009229545 A 10/2009
 JP 2009276493 A 11/2009
 JP 04377820 B2 12/2009
 KR 2009005382 A 1/2009
 KR 200905382 U 6/2009
 KR 1371686 B1 3/2014
 TW 200821653 A 5/2008
 WO WO2001019904 A1 3/2001
 WO WO2001079904 A2 10/2001
 WO WO2001079904 A3 3/2002
 WO WO2004027485 A1 4/2004
 WO WO2006007120 A1 1/2006
 WO 2008/11986 A1 9/2008
 WO 2009/135787 A1 11/2009
 WO WO2010024851 A2 3/2010
 WO WO2010024851 A3 6/2010
 WO WO2012136702 A1 10/2012
 WO 2012/162385 A1 11/2012
 WO 2014/182531 A1 11/2014
 WO WO2015103783 A1 7/2015
 WO 2015/191024 A1 12/2015
 WO WO2016019993 A1 2/2016
 WO 2016/148741 A1 9/2016
 WO WO2019126333 A1 6/2019

OTHER PUBLICATIONS

PCT/US2018/062406 The written Opinion dated Mar. 18, 2019.
 PCT/US2018/062405 International Search Report dated Apr. 3, 2019.
 PCT/US2018/062405 The written Opinion dated Apr. 3, 2019.
 International Search Report and Written Opinion, Application No. PCT/IB2018/056133, dated Jan. 1, 2019, pp. 7.
 Non-Final Office Action, U.S. Appl. No. 16/035,695, dated Sep. 28, 2018, pp. 7.
 ISR for PCT/US2019/013861, dated Apr. 8, 2019, 3 pages.
 WO for PCT/US2019/013861, dated Apr. 8, 2019, 11 pages.
 Fiber Optic Connectors and Assemblies Catalog, 2009, Huber & Suhner Fiber Optics, Herisau, Switzerland.
 Final Office Action, U.S. Appl. No. 16/035,691, dated Feb. 11, 2019, pp. 8.
 International Search Report and Written Opinion for Application No. PCT/US2018/62406 dated Mar. 18, 2019, 12, pages.
 International Search Report and Written Opinion for Application No. PCT/US2019/40700 dated Sep. 27, 2019, 12, pages.

(56)

References Cited

OTHER PUBLICATIONS

International Search Report and Written Opinion for Application No. PCT/US2019/50895 dated Jan. 6, 2020, 12, pages.
 International Search Report and Written Opinion for Application No. PCT/US2019/50909 dated Dec. 17, 2019, 11, pages.
 International Search Report and Written Opinion for Application No. PCT/US2019/56564 dated Jan. 14, 2020, 14, pages.
 International Search Report and Written Opinion, Application No. PCT/US2018/042202, pp. 17, dated Dec. 7, 2018.
 International Search Report and Written Opinion, Application No. PCT/US19/24718, dated Jun. 26, 2019, pp. 7.
 International Search Report and Written Opinion, Application No. PCT/US19/46397, dated Nov. 12, 2019, pp. 6.
 International Search Report and Written Opinion for PCT Application No. PCT/IB2018/056133, Jan. 3, 2019, 7 pages.
 PCY/IB/056133 Search Report dated Jan. 3, 2019.
 Fiber Optic Interconnect Solutions, Tactical Fiber Optic Connector Cables and Termini, 2006, Glenair, Inc., Glendale, California.
 Fiber Optic Products Catalog, Nov. 2007, Tyco Electronics Corporation, Harrisburg, Pennsylvania.
 International Search Report and Written Opinion dated Apr. 27, 2012 for PCT/US2011/058799.
 International Search Report and Written Opinion dated Aug. 27, 2012 for PCT/US2012/039126.

International Search Report and Written Opinion dated Jan. 16, 2014 for PCT/US2013/54784.
 International Search Report and Written Opinion dated Oct. 9, 2014 for PCT/US2014/041500.
 International Search Report and Written Opinion dated May 14, 2014 for PCT/US2014/012137.
 International Search Report and Written Opinion dated Aug. 21, 2008 for PCT/US2008/057023.
 International Search Report dated May 19, 2019 for PCT/US2016/028266.
 ISR WO2014028527ISR dated Feb. 20, 2014.
 ISR WO2015US57610ISR dated Jan. 21, 2016.
 International Preliminary Report on Patentability, Application No. PCT/US2018/015733, dated Aug. 8, 2019, pp. 9.
 Non-Final Office Action, U.S. Appl. No. 15/882,343, dated Nov. 19, 2018, pp. 12.
 European Search Report and Written Opinion dated Mar. 3, 2015 for EP 14187661.
 European Search Report and Written Opinion dated Feb. 19, 2015 for EP 14168005.
 International Preliminary Report on Patentability dated Aug. 22, 2016 from related International Application No. PCT/US2015/059458, International Filing Date Nov. 6, 2015.

* cited by examiner

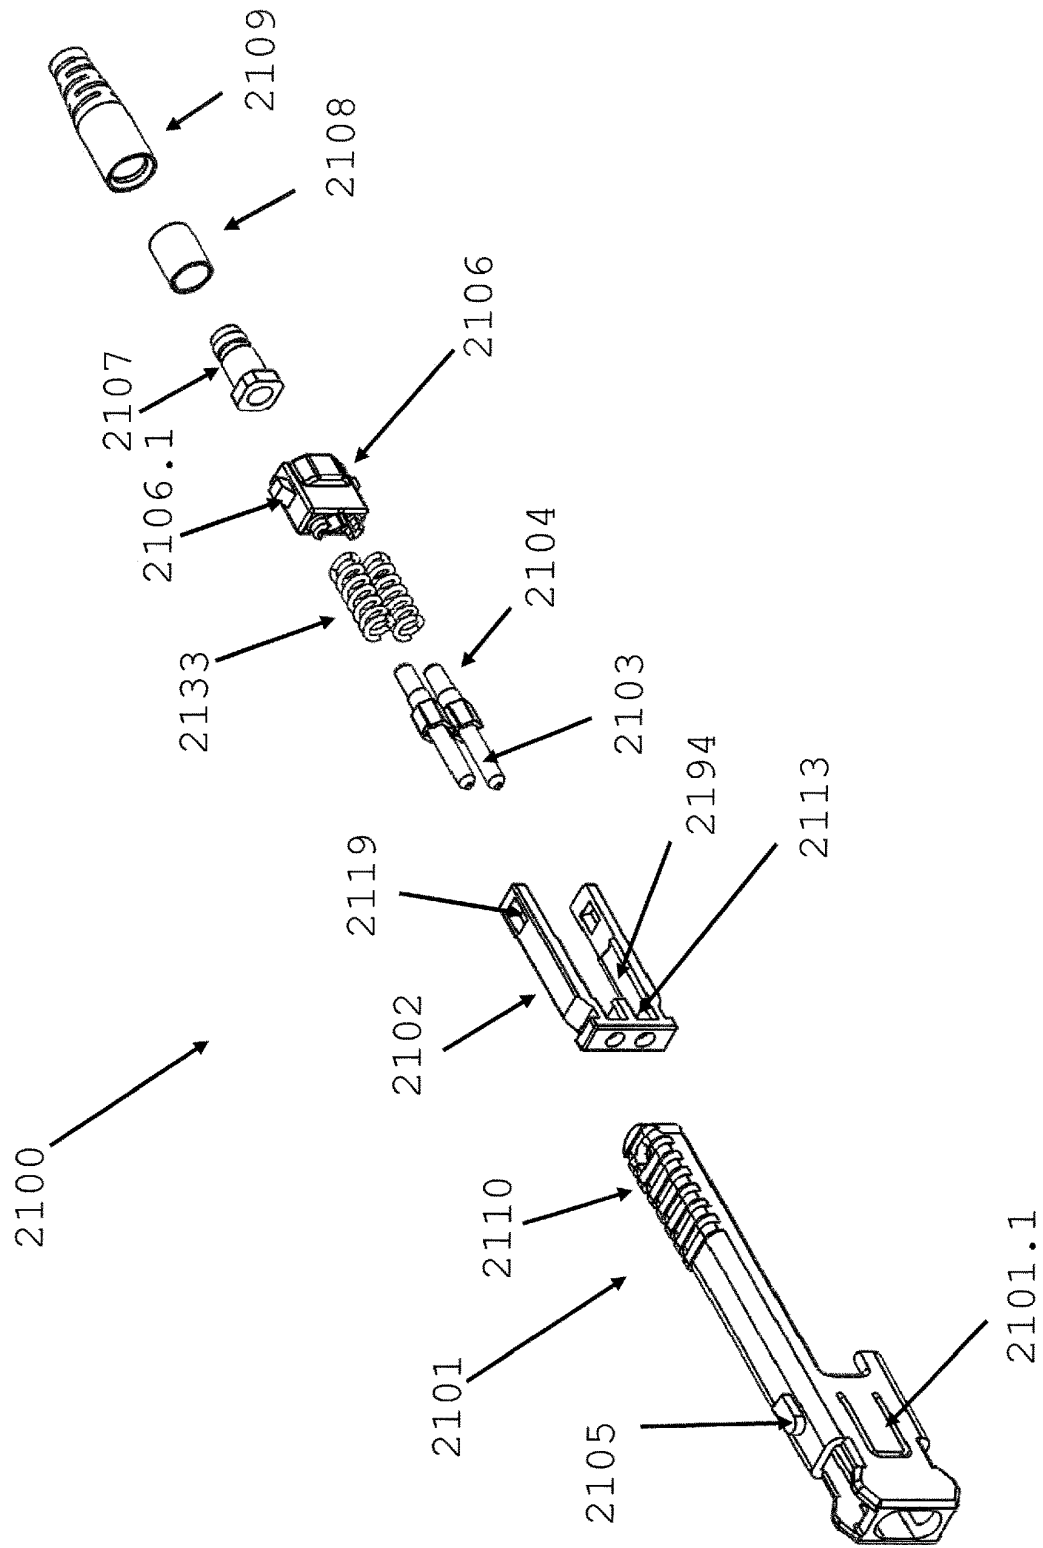


FIG. 1.

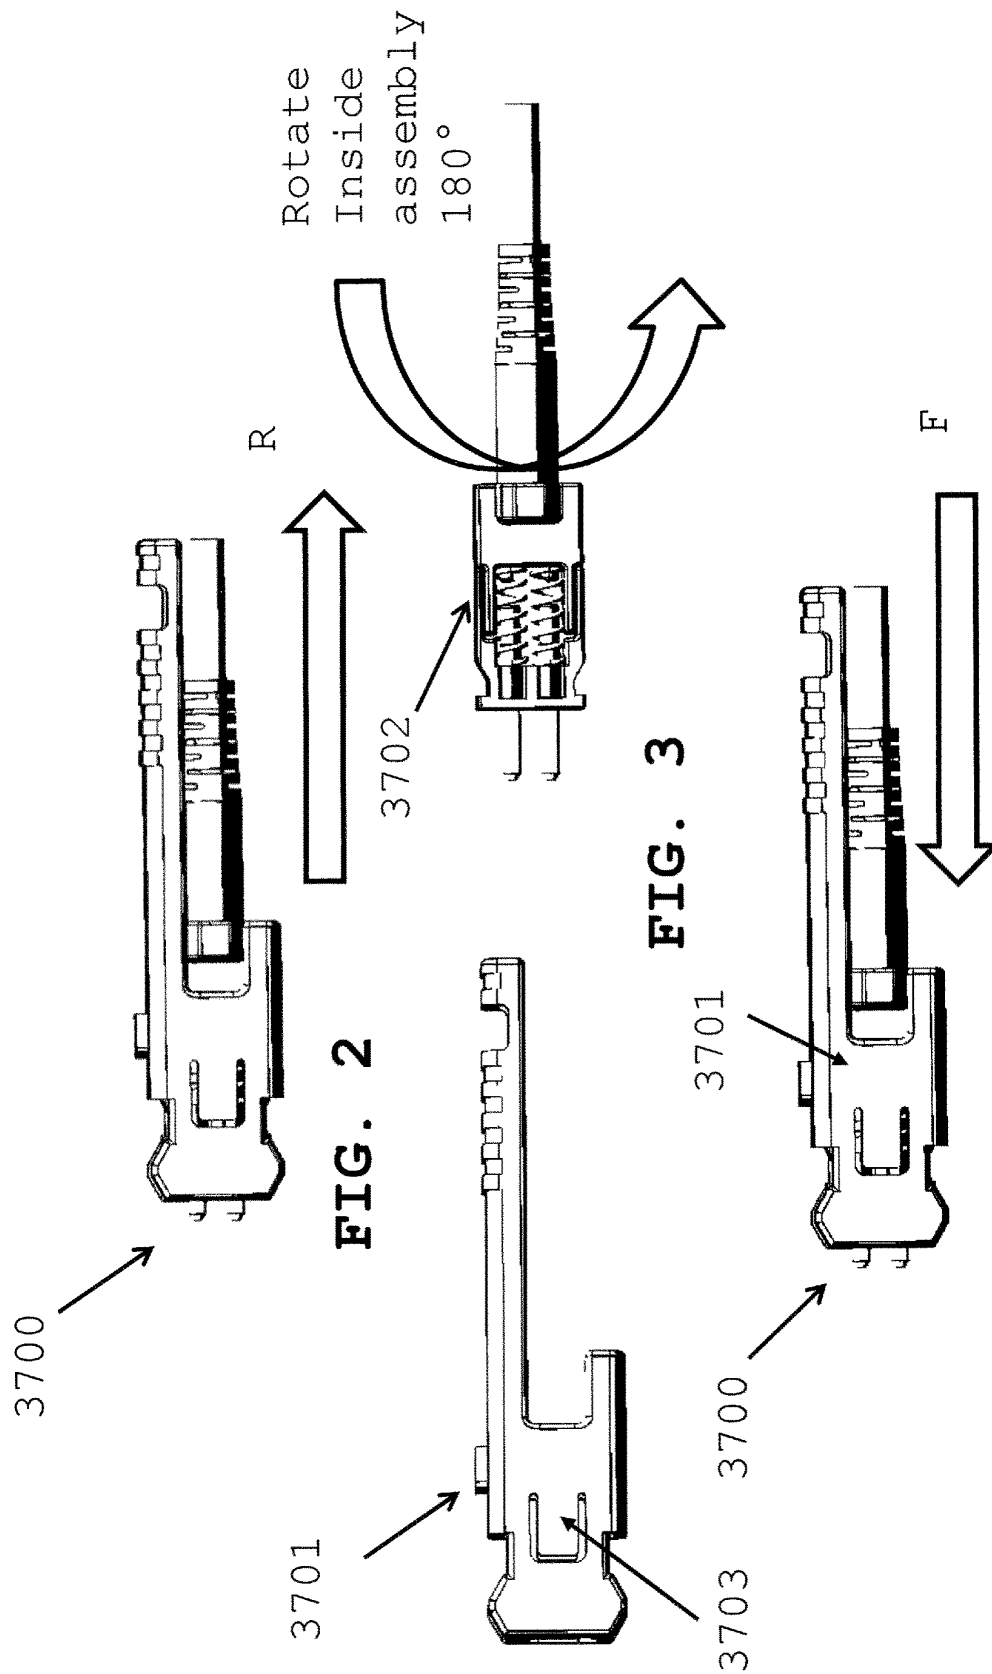
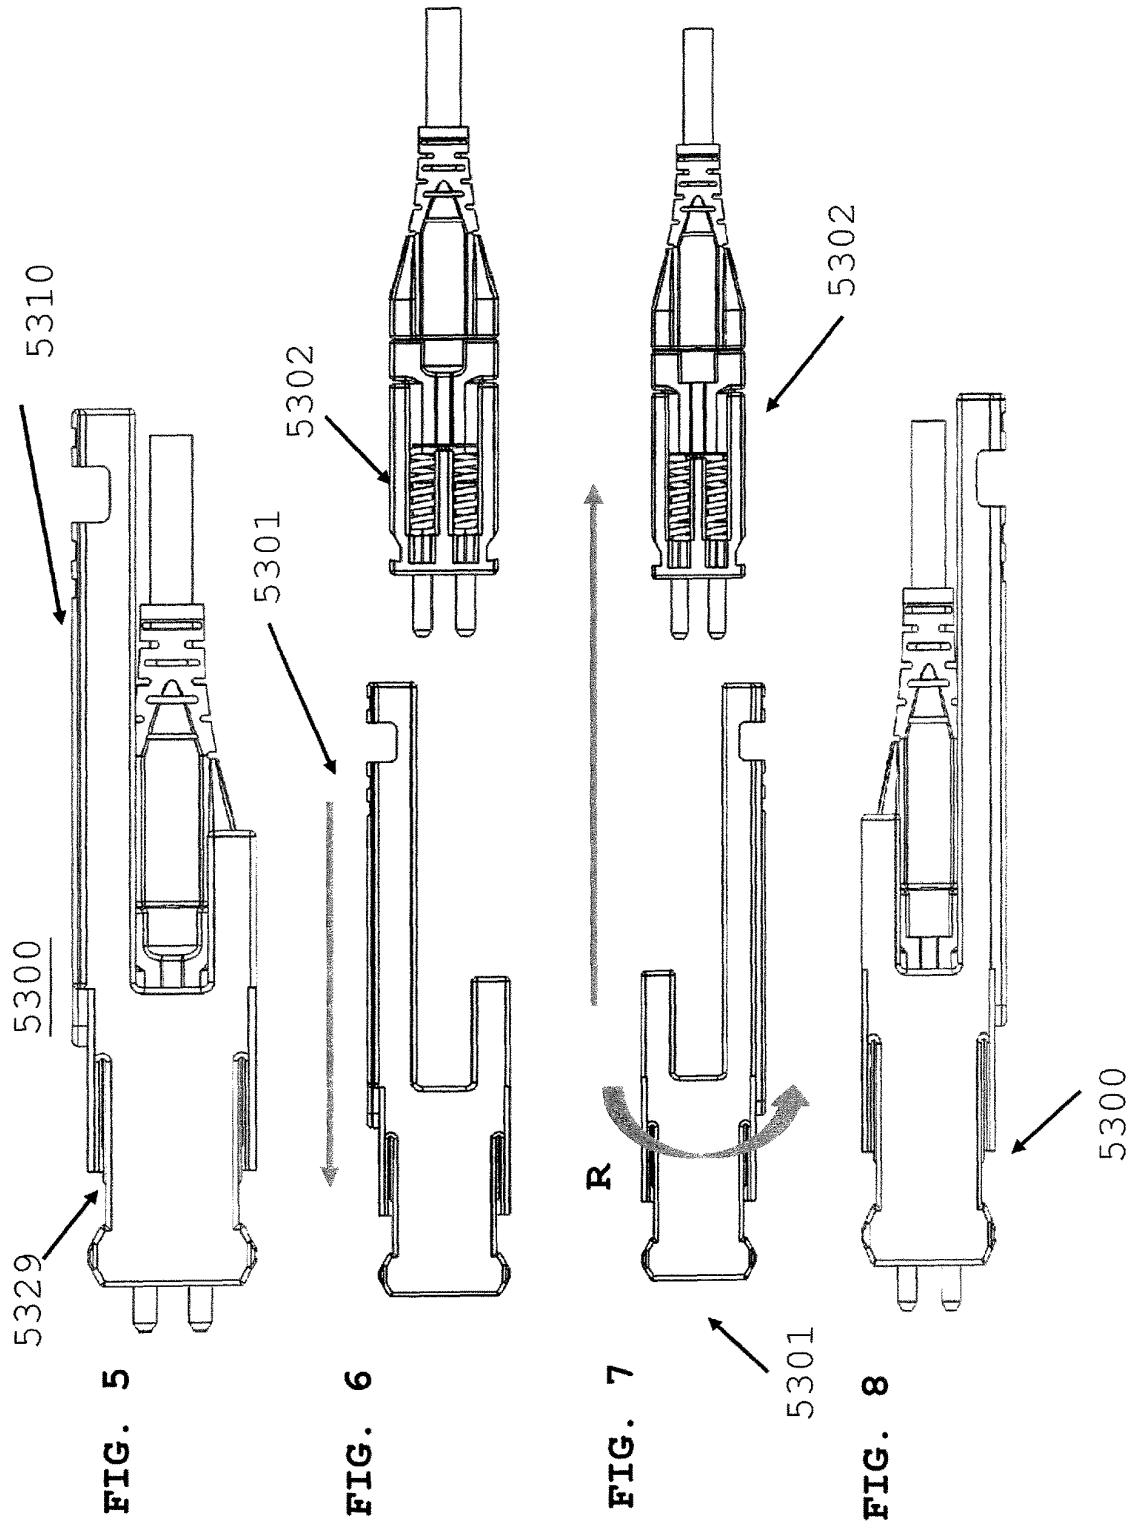
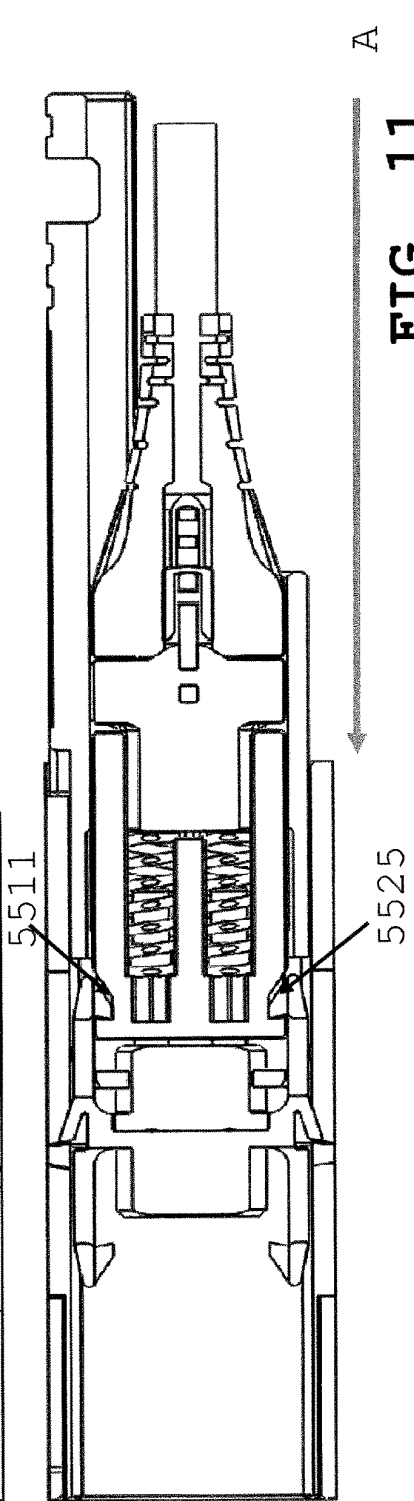
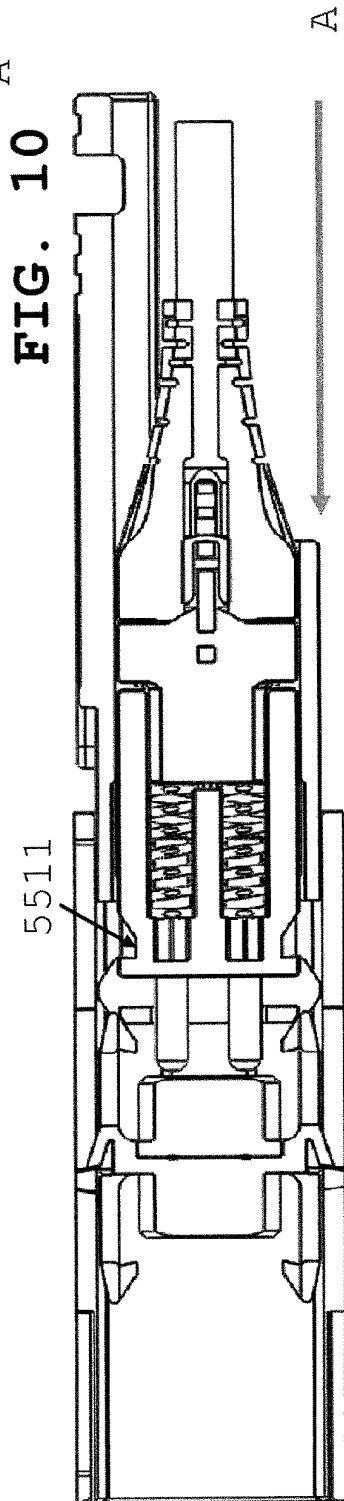
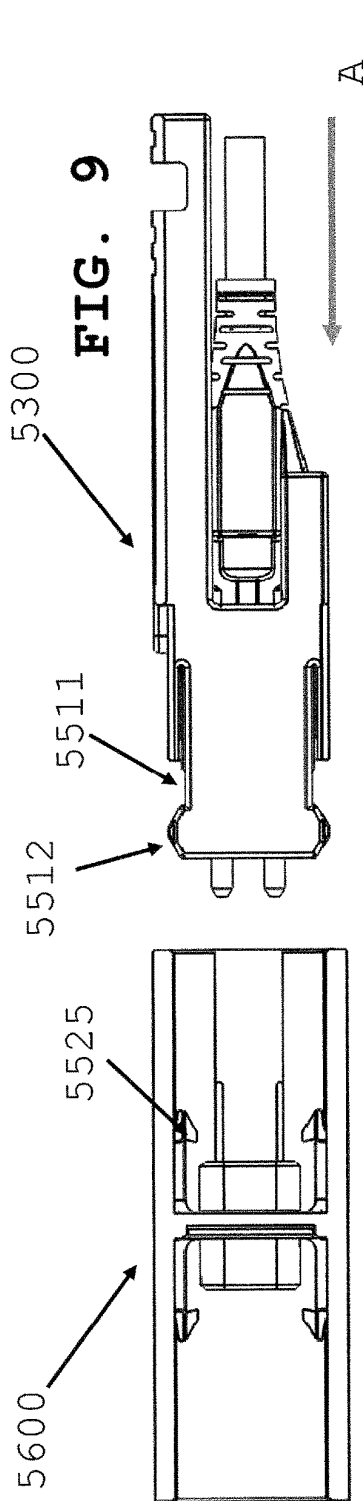


FIG. 2

FIG. 3

FIG. 4





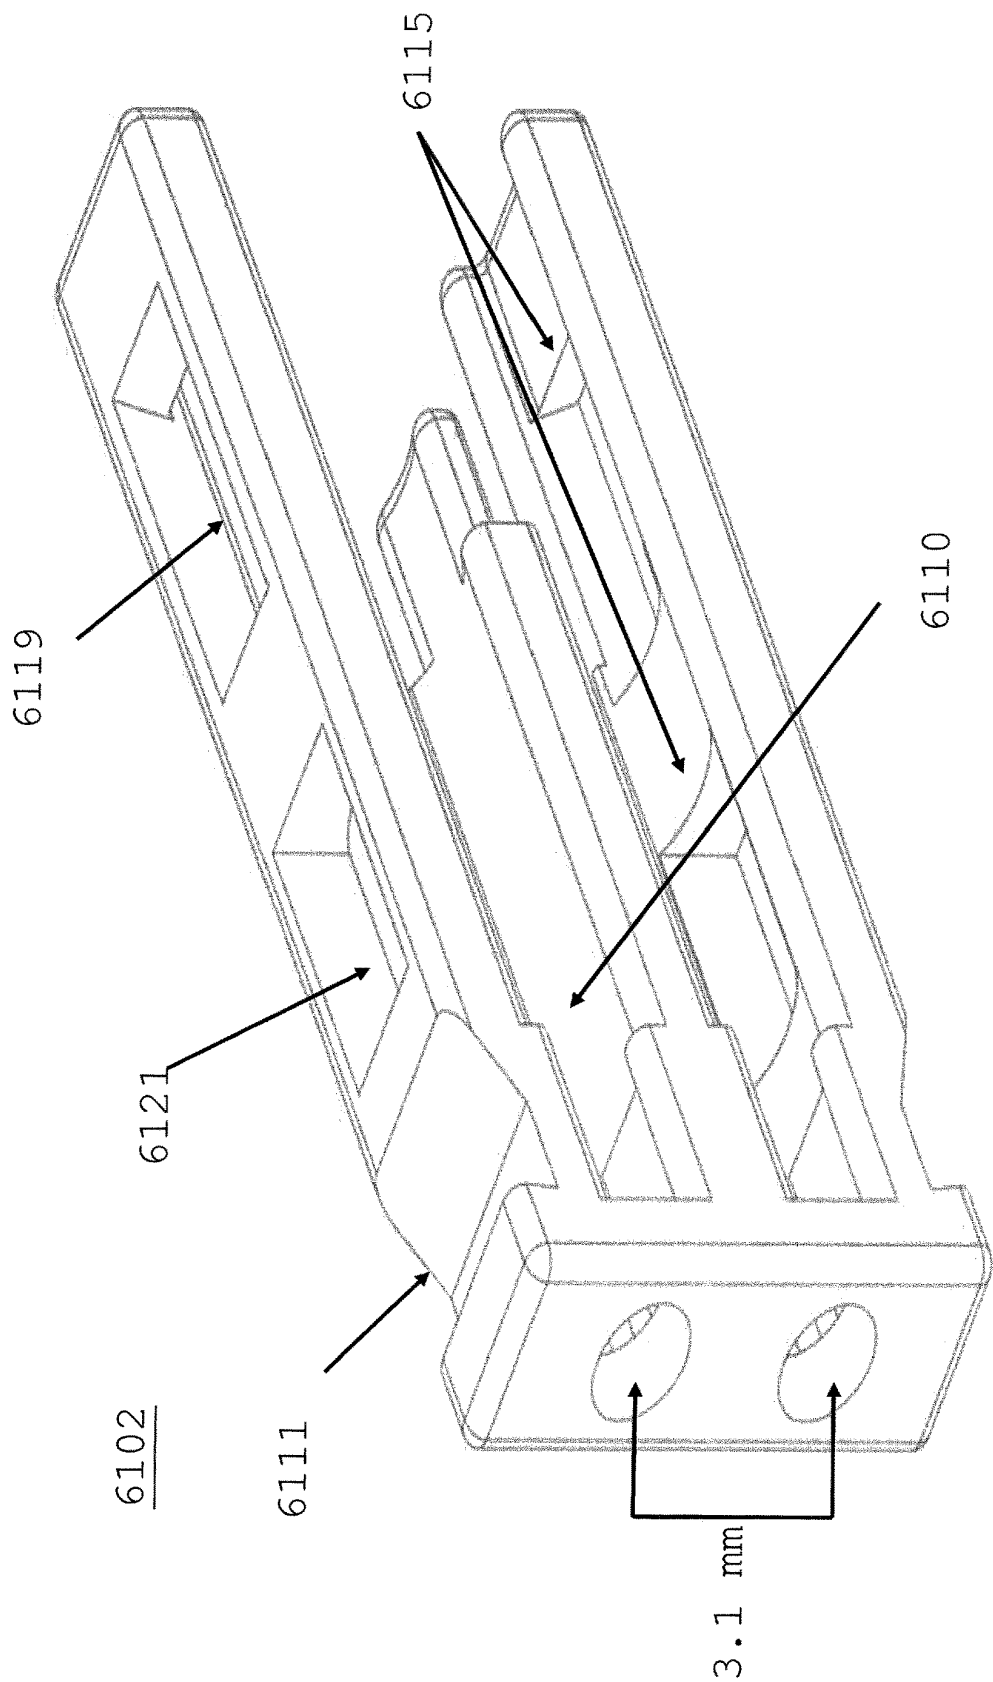


FIG. 12

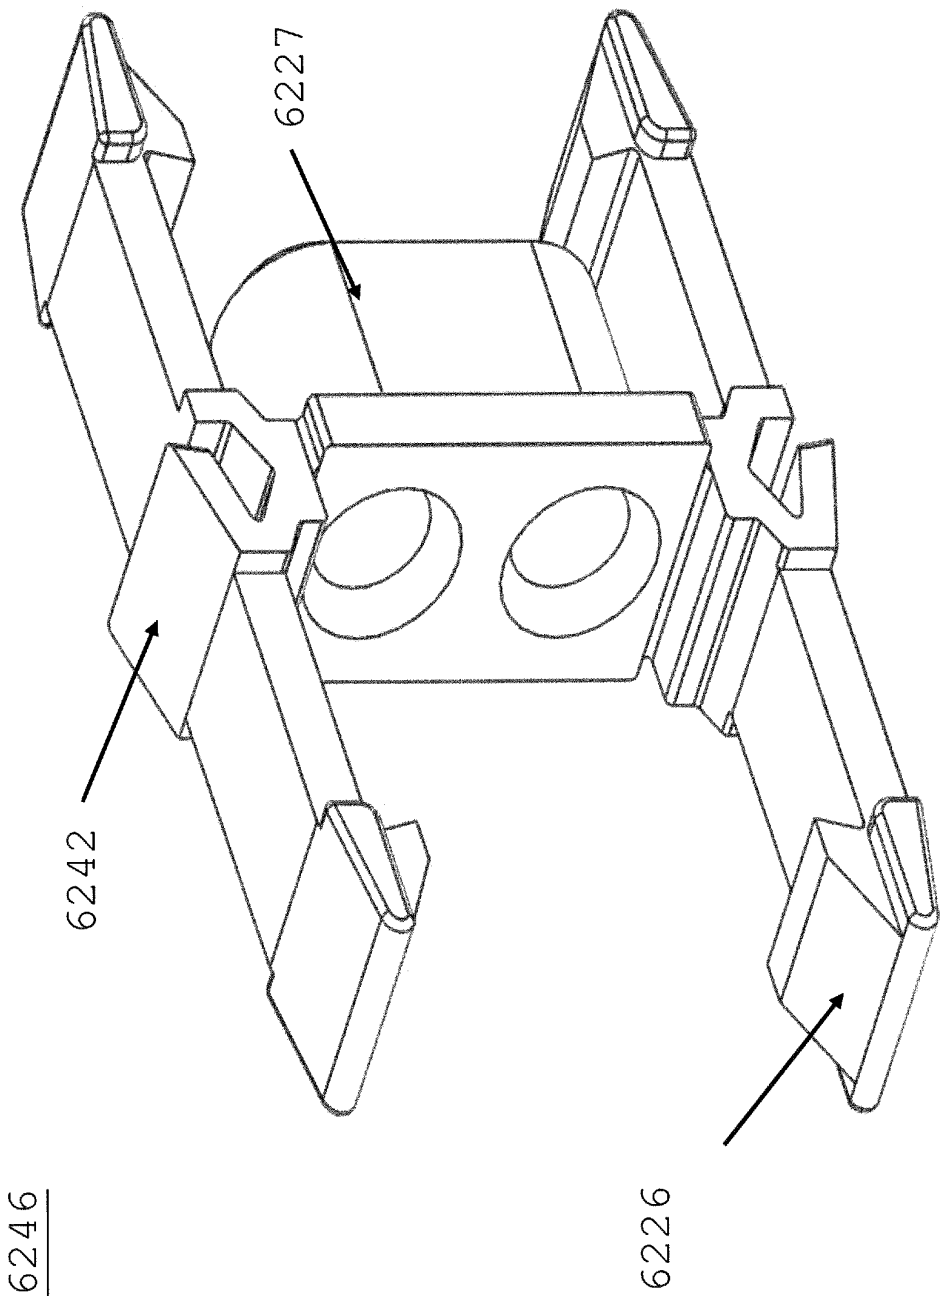


FIG. 13

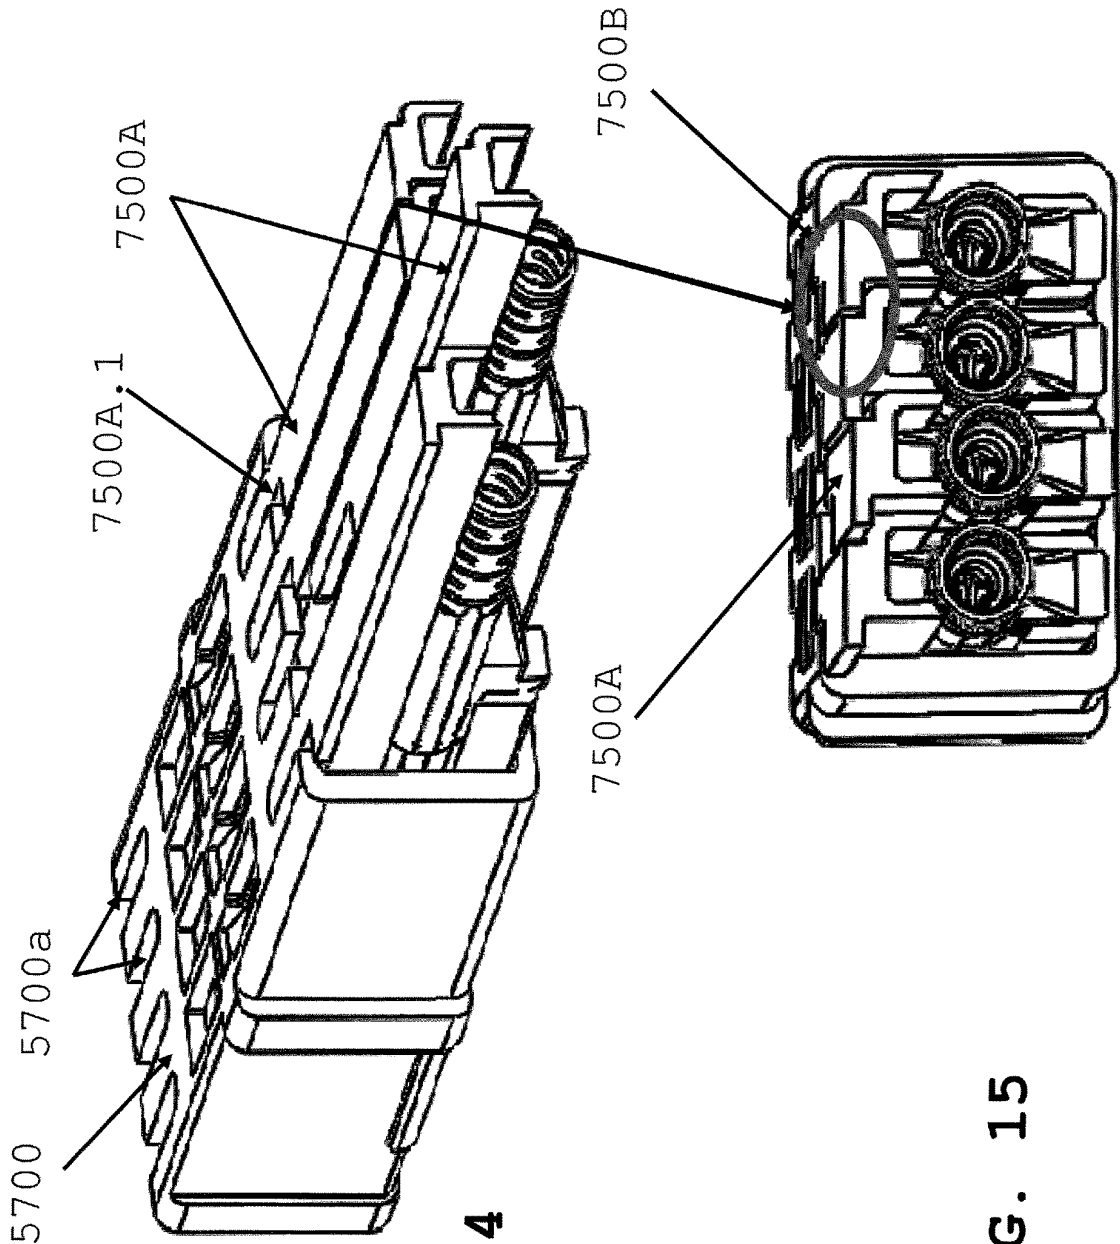


FIG. 14

FIG. 15

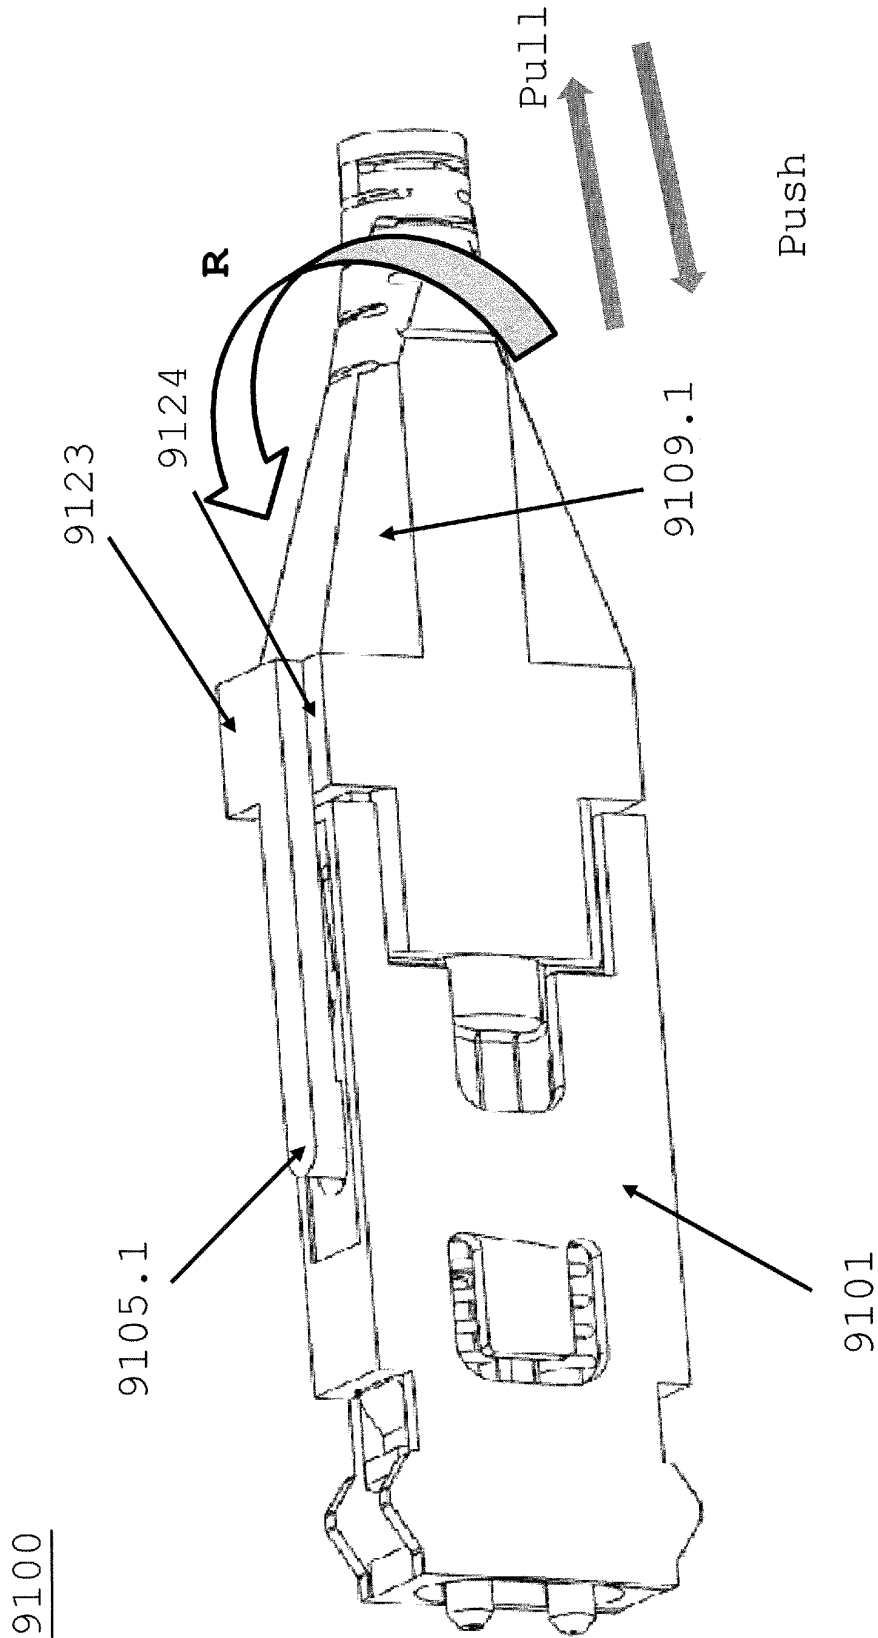


FIG. 16

9109.1





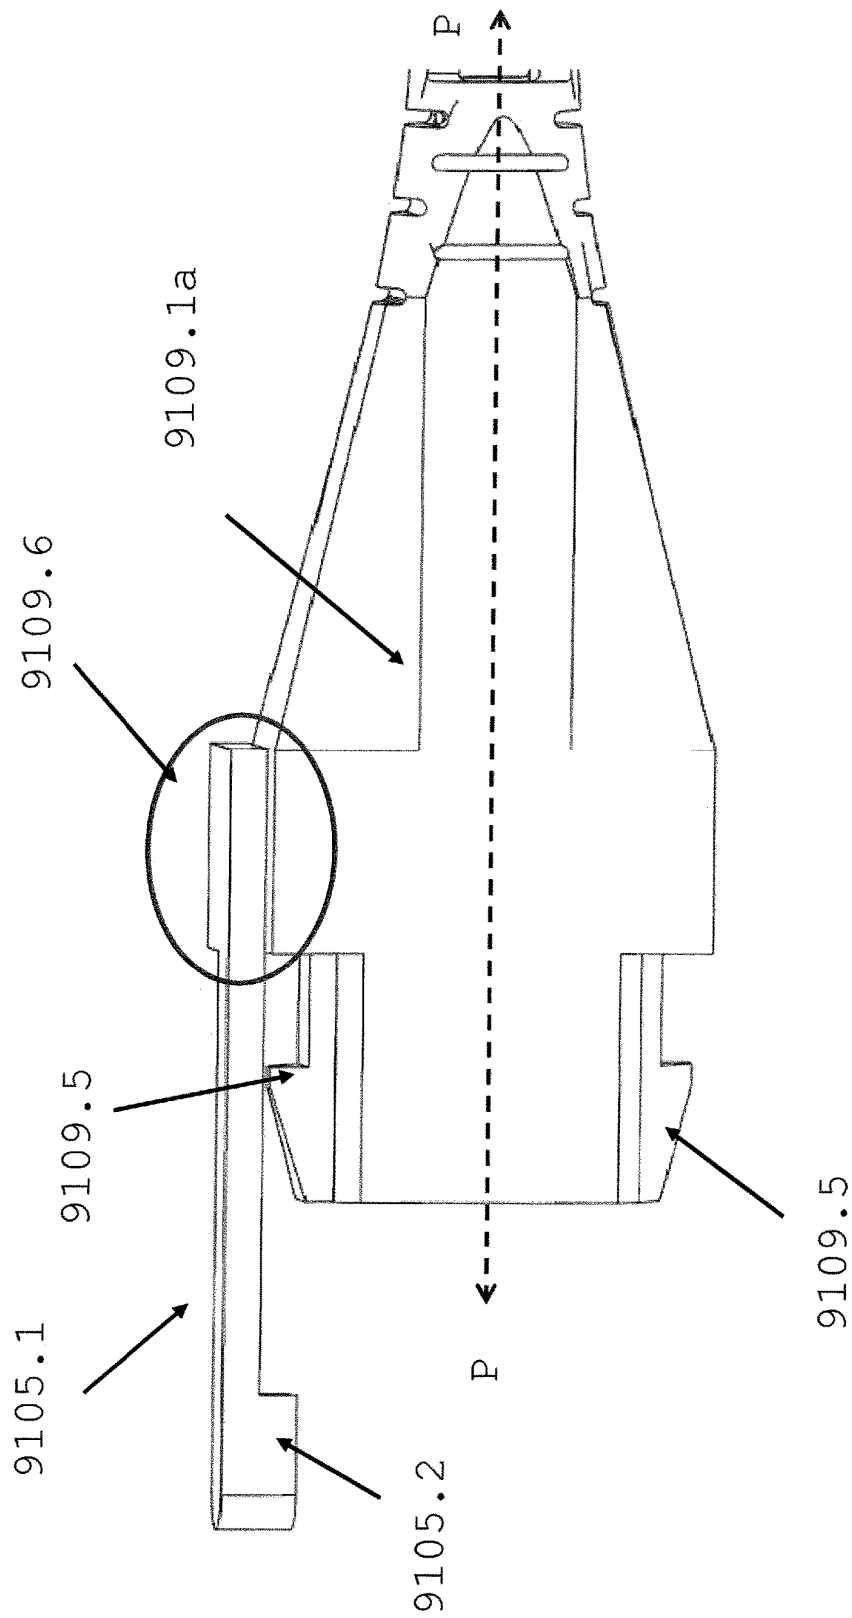


FIG. 17

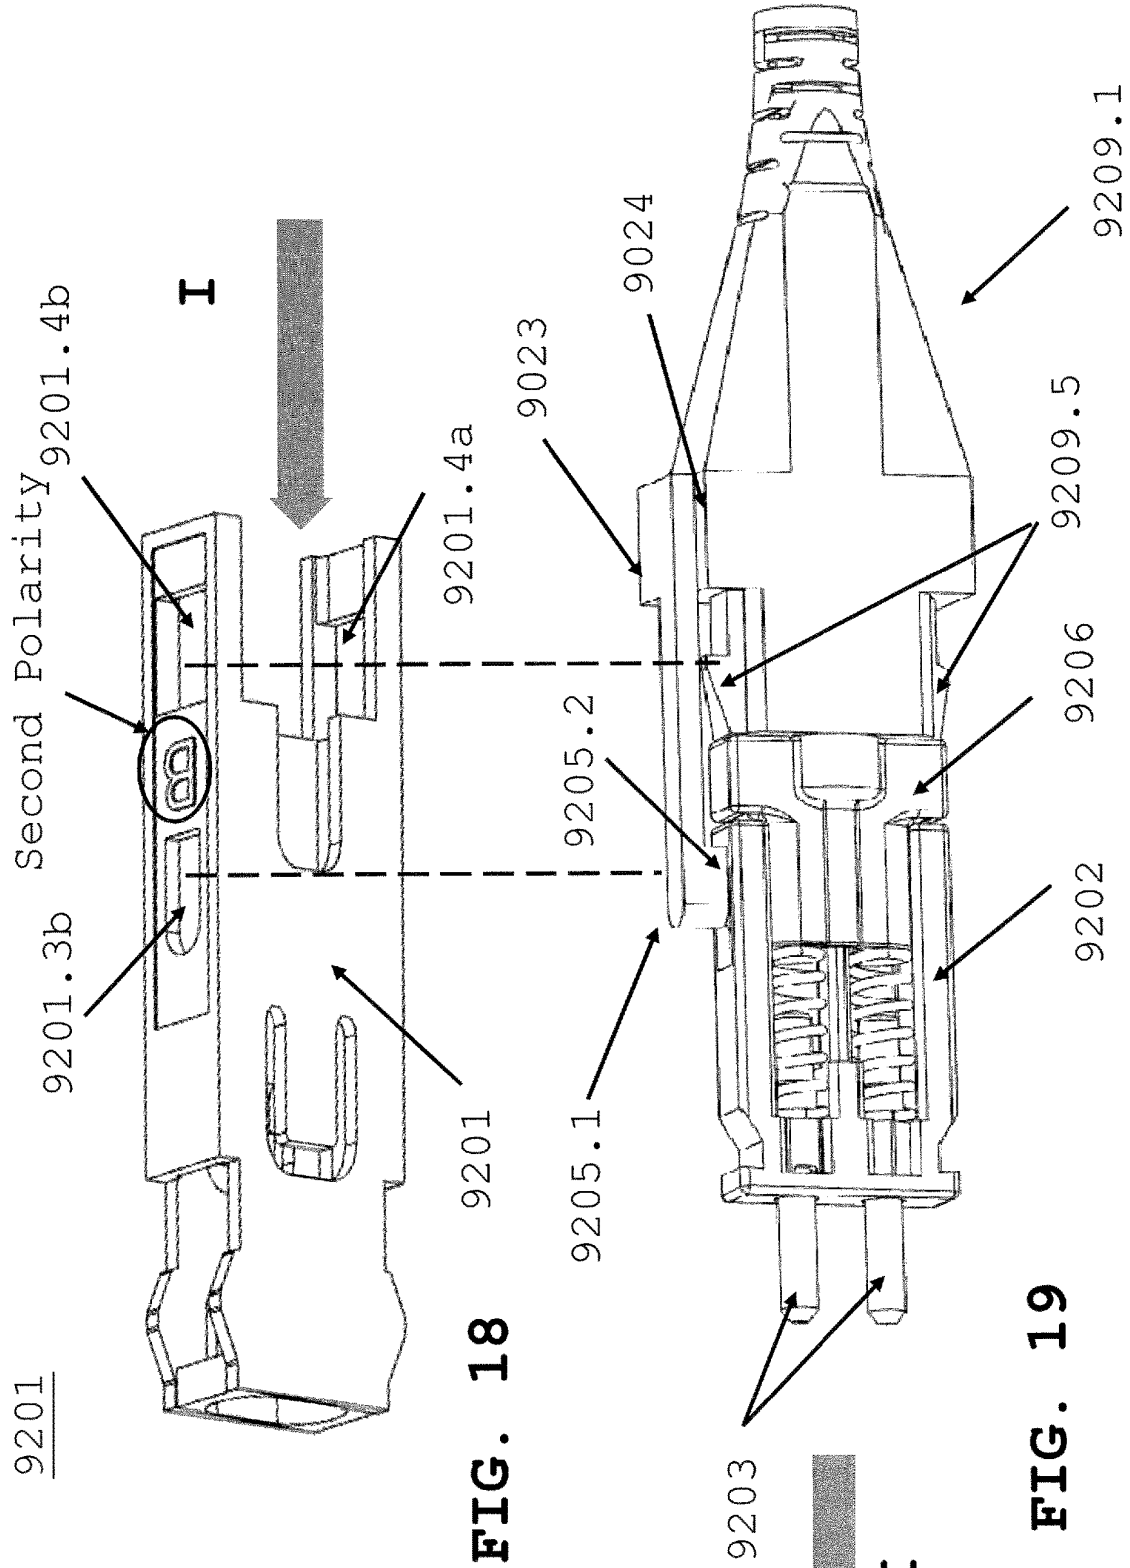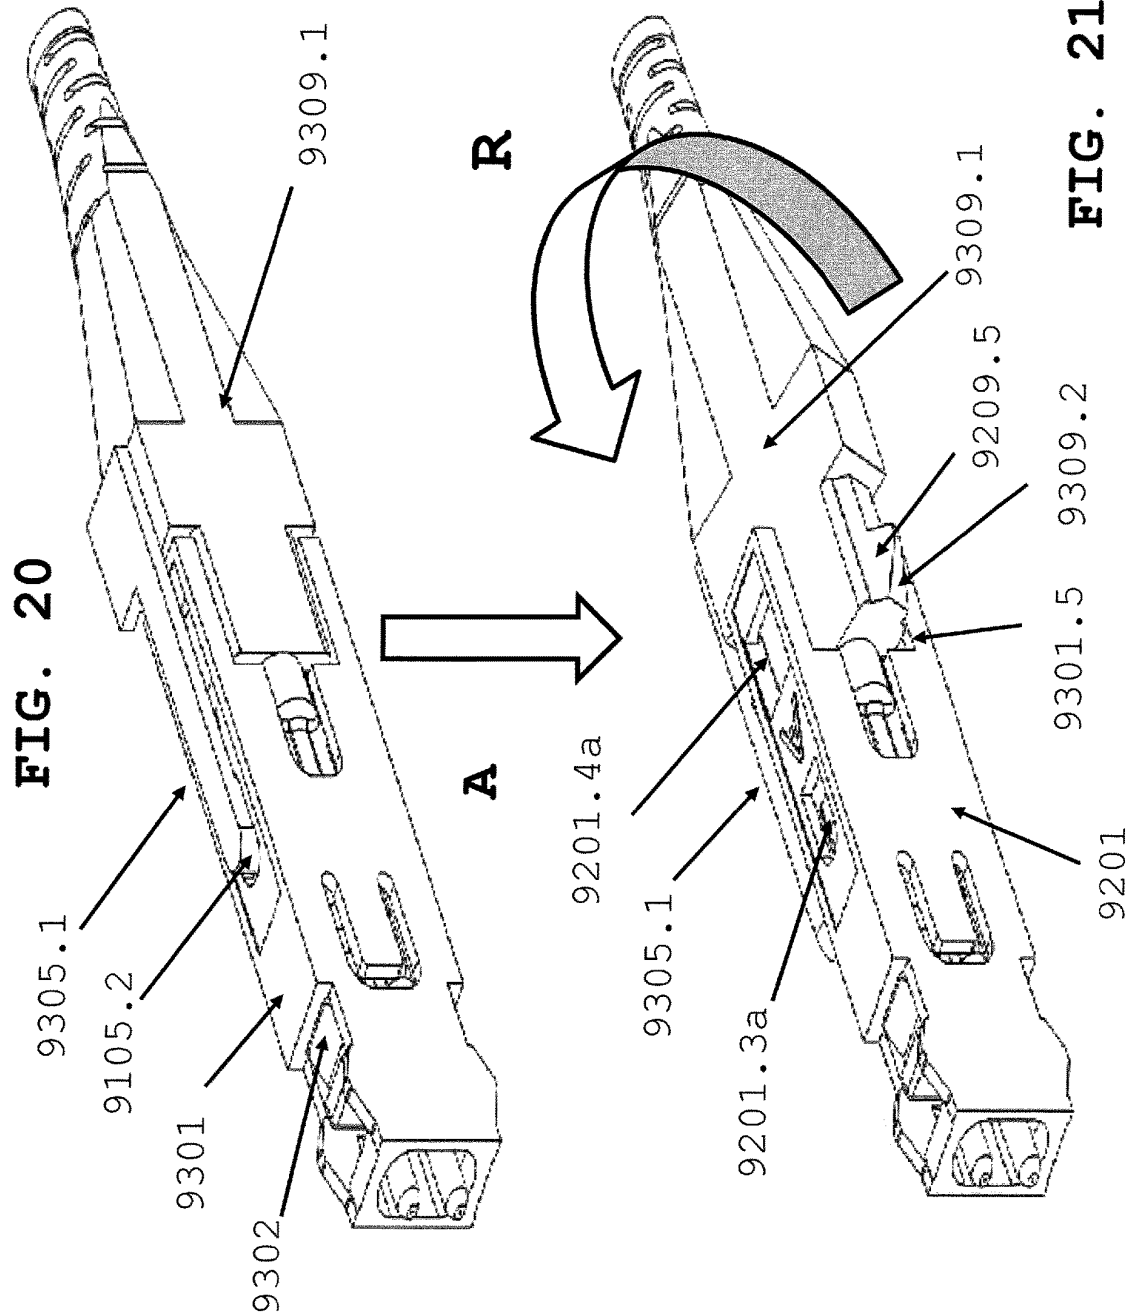

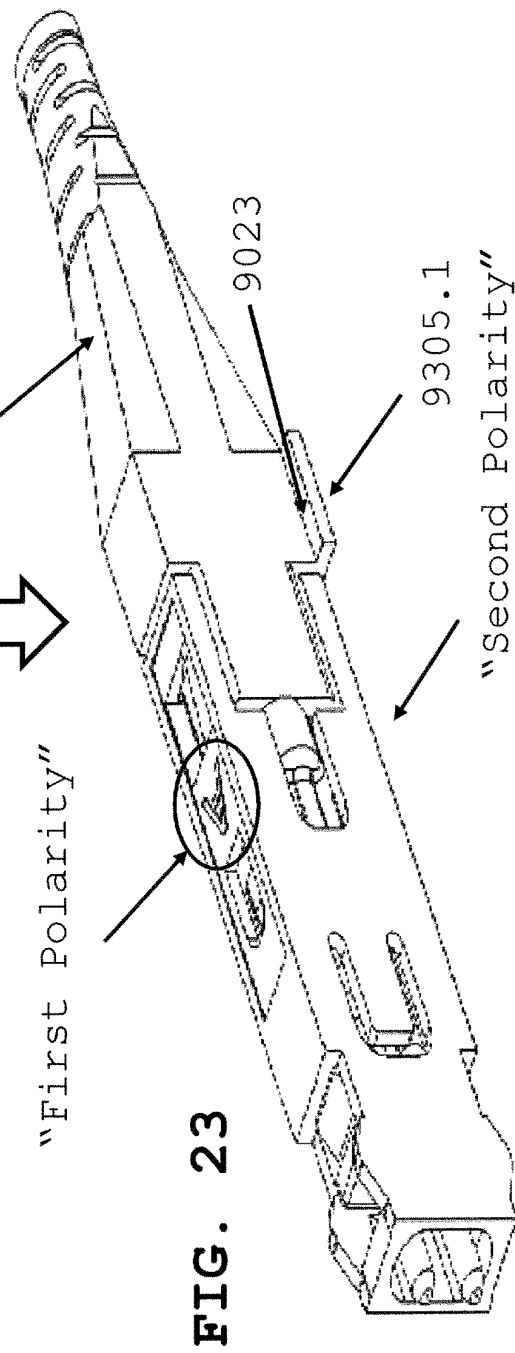

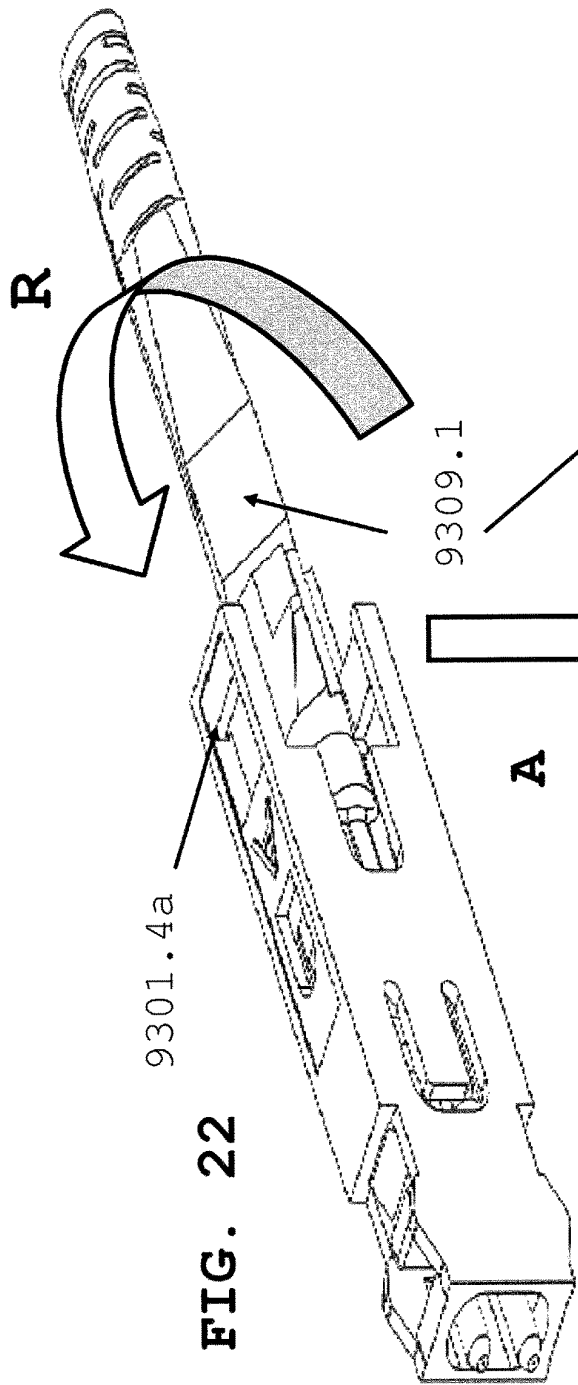

9100

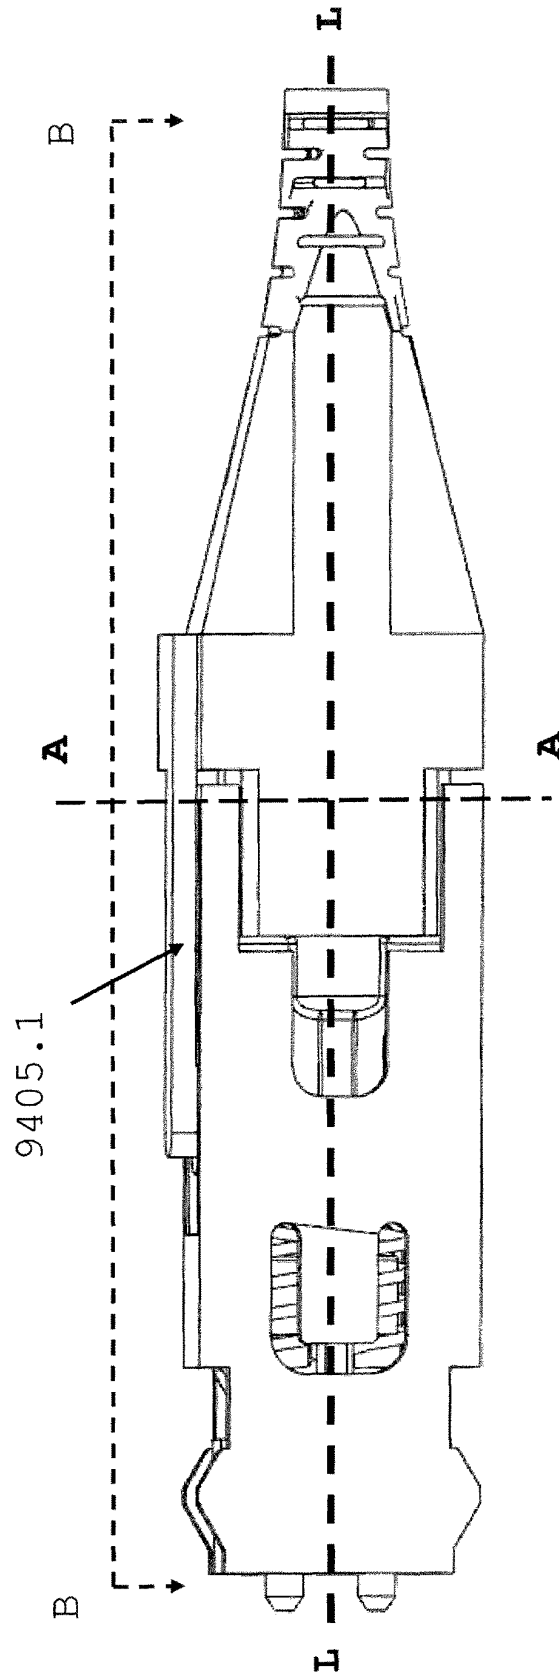


FIG. 24

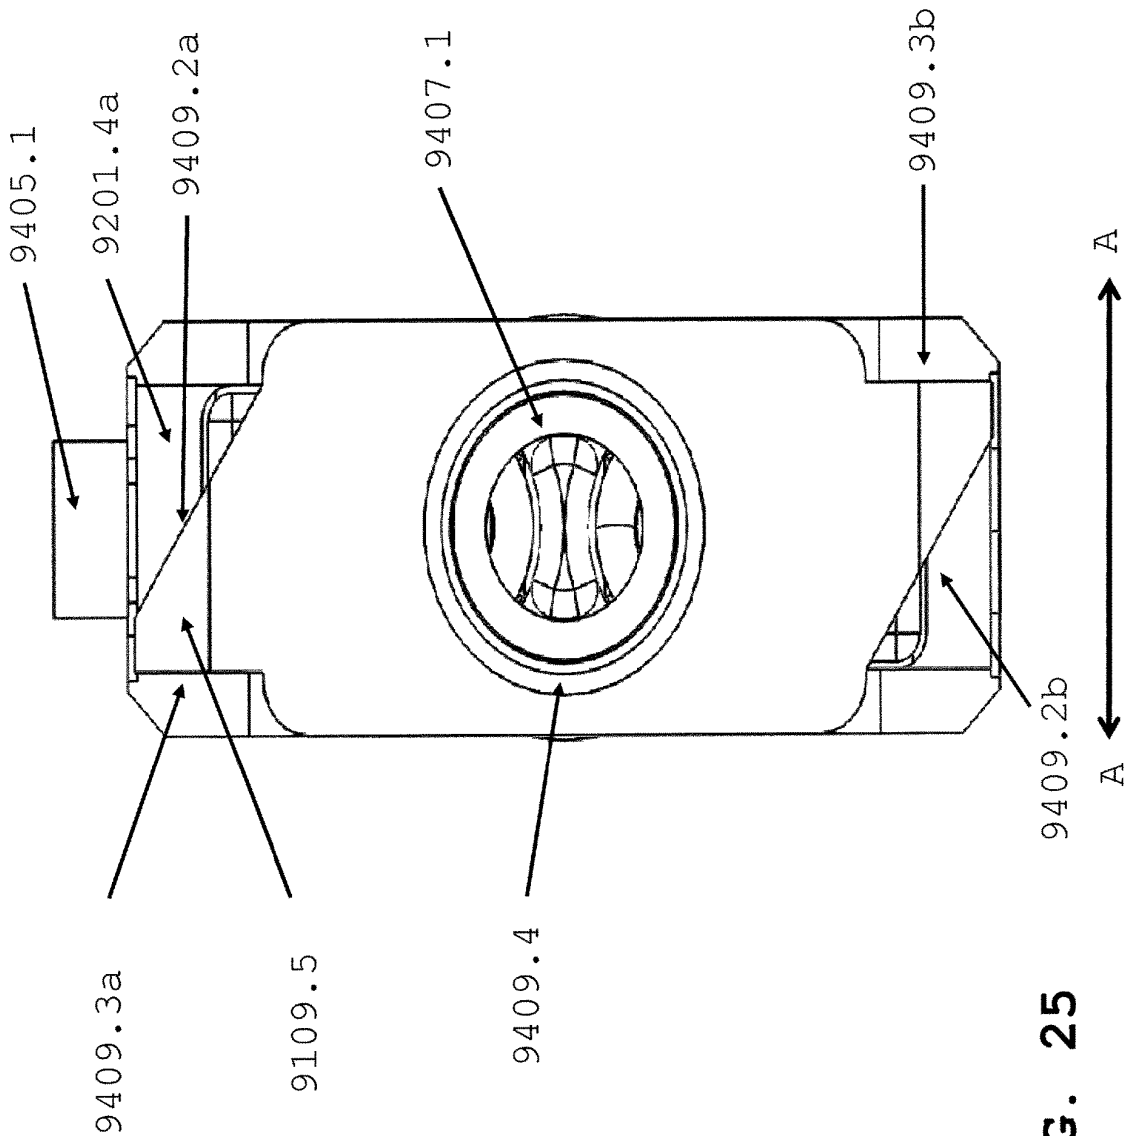
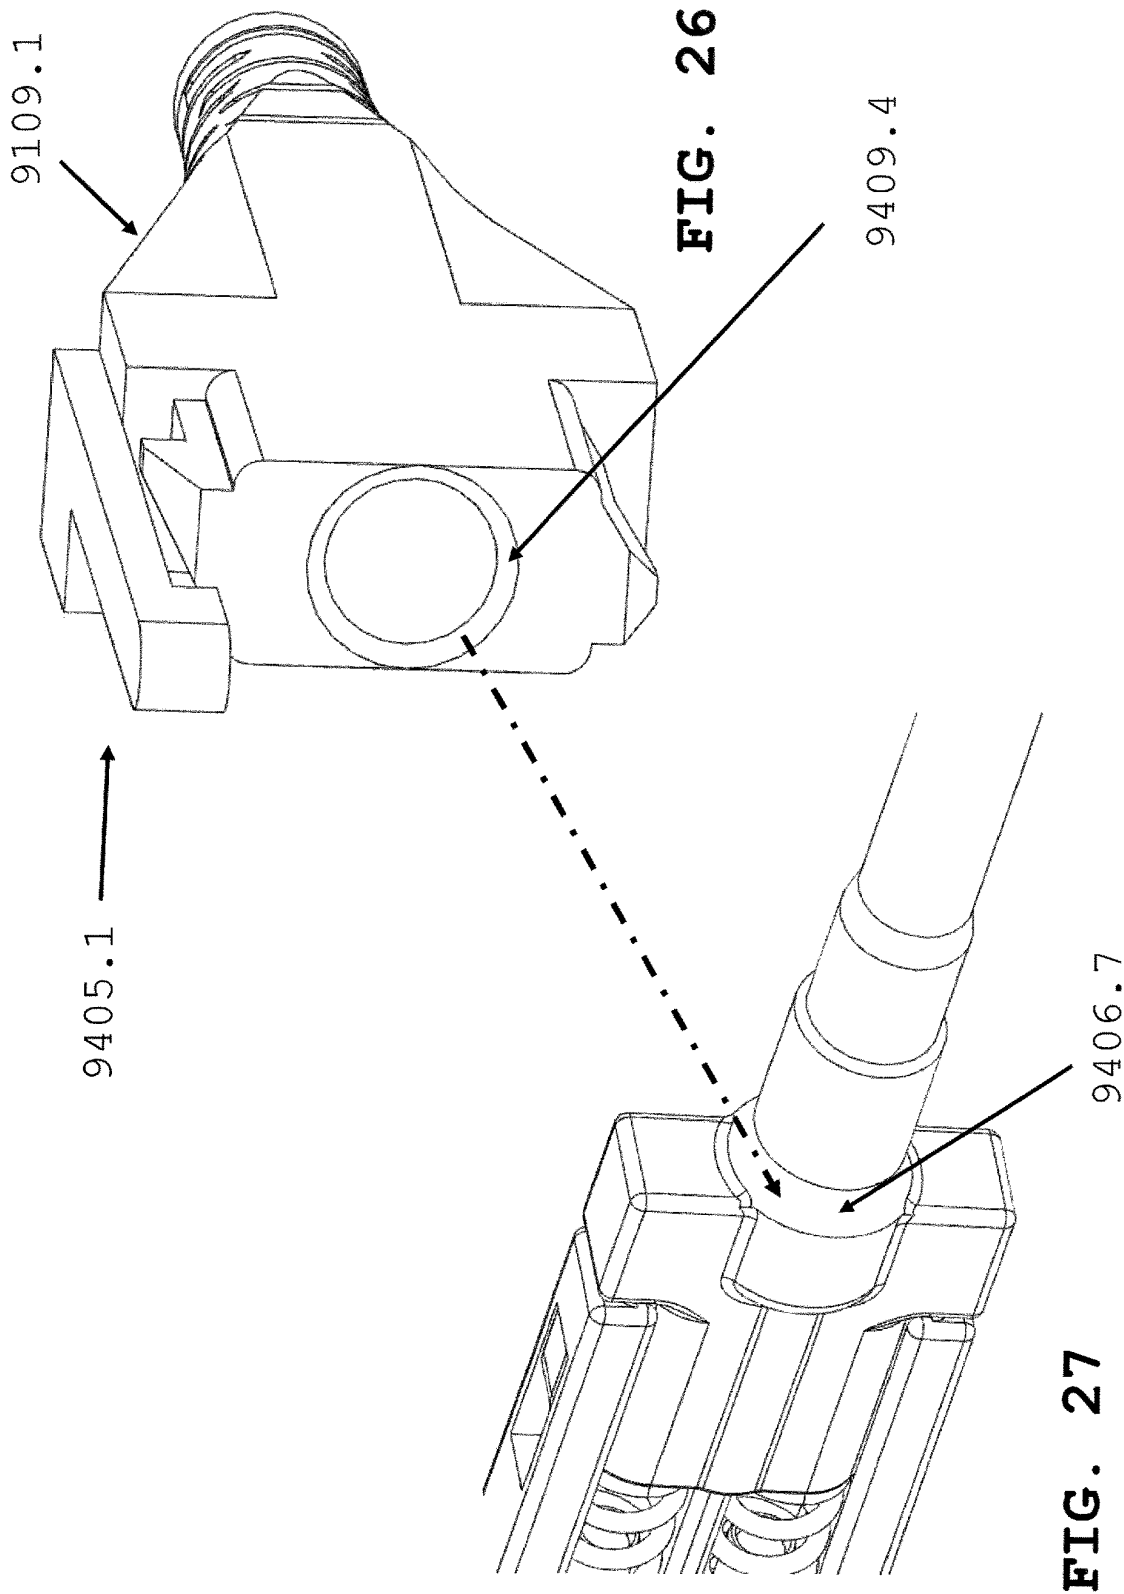


FIG. 25



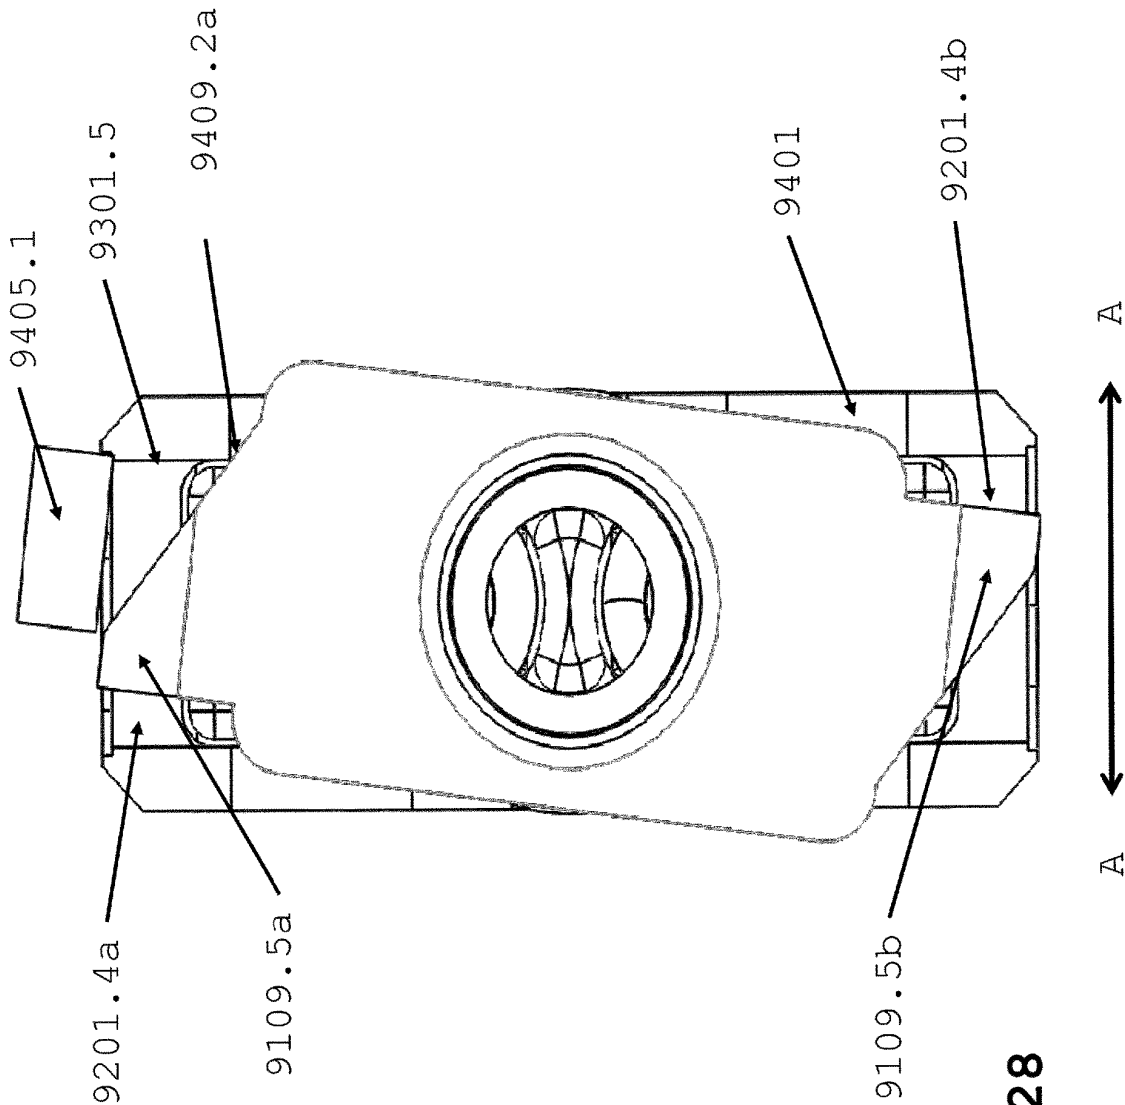
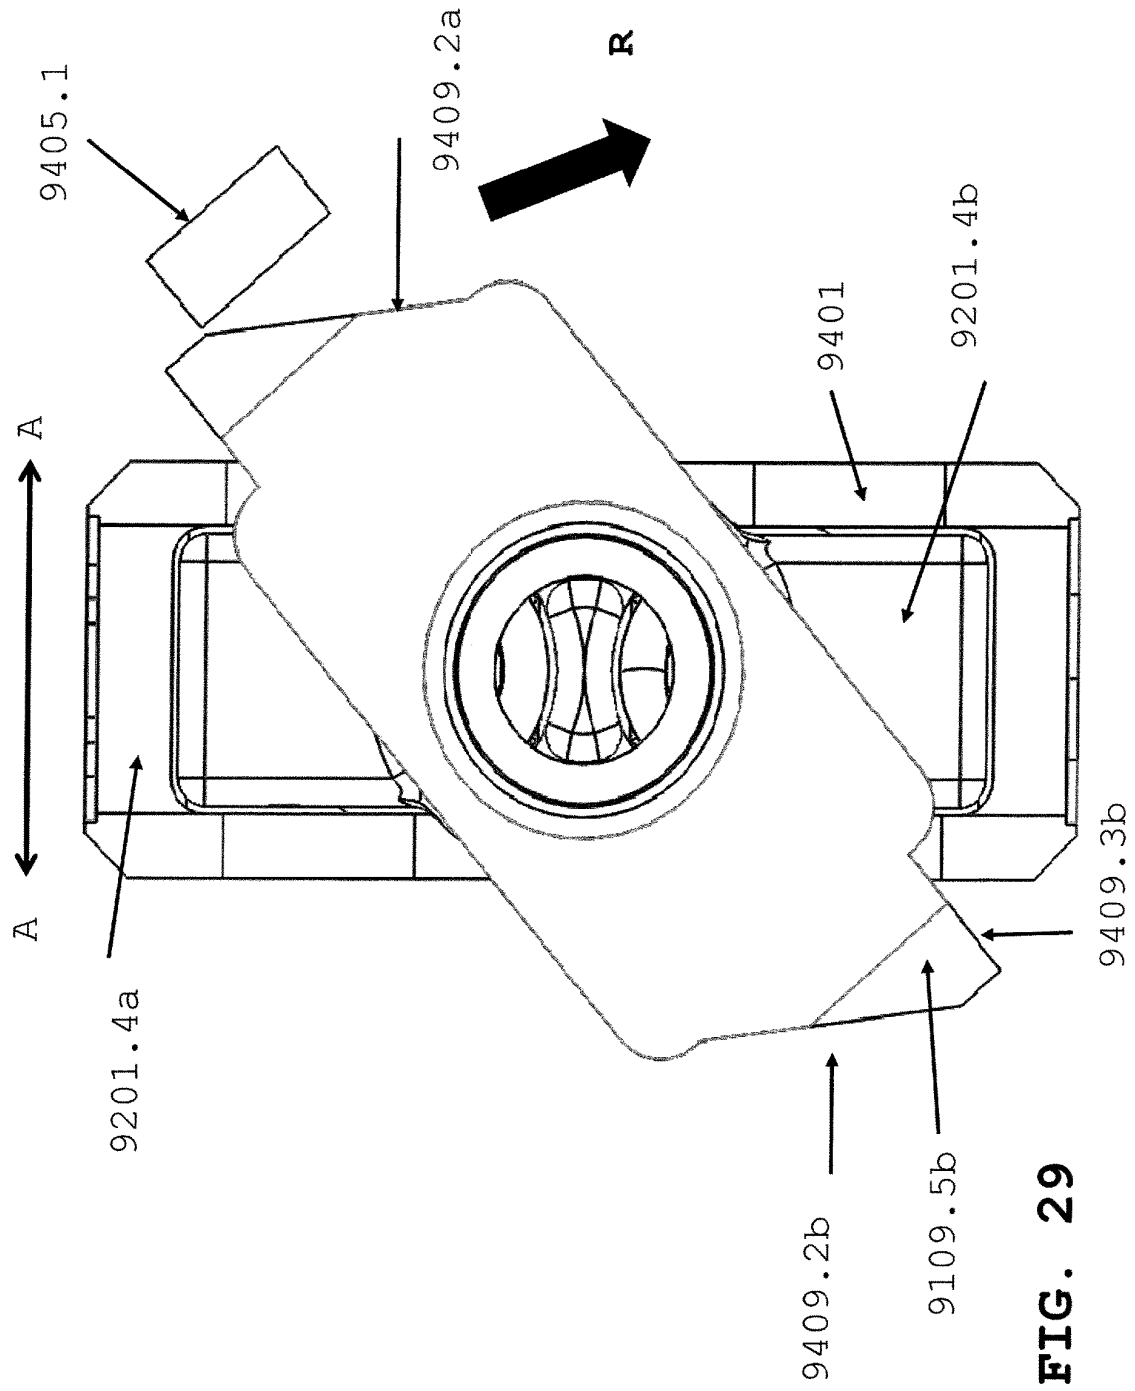


FIG. 28



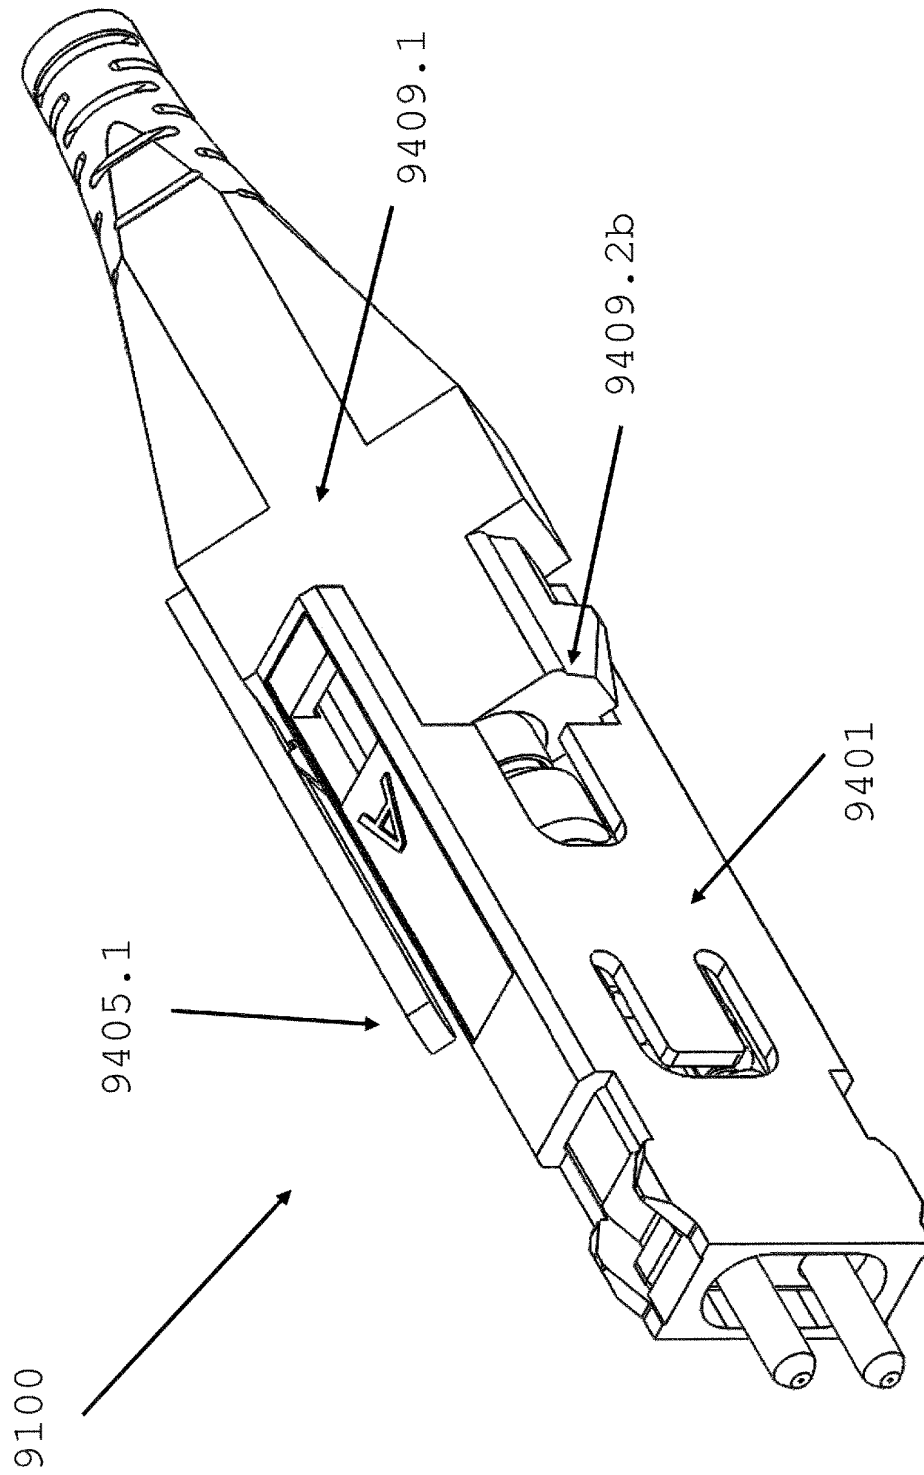


FIG. 30

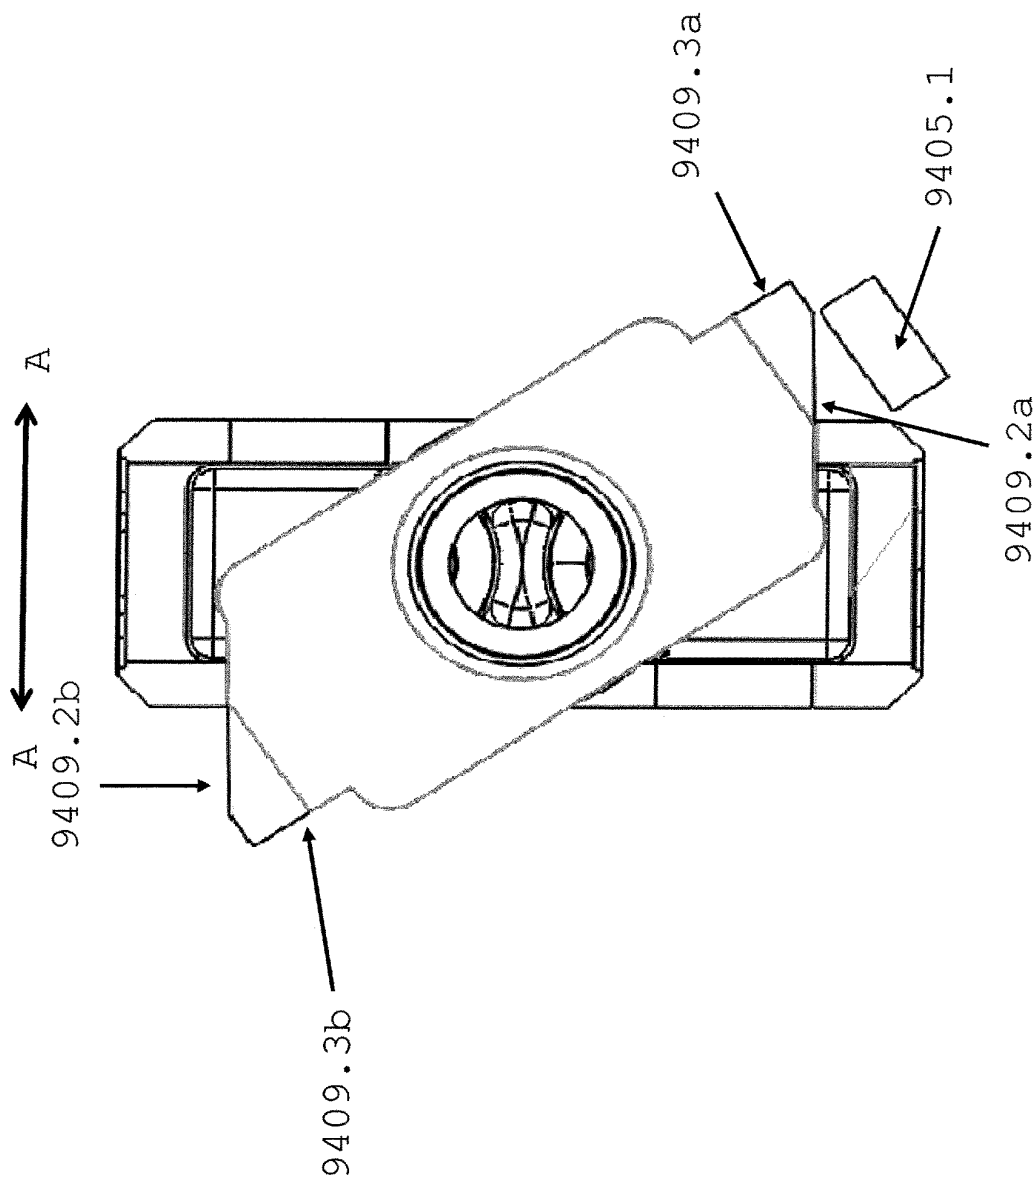


FIG. 31

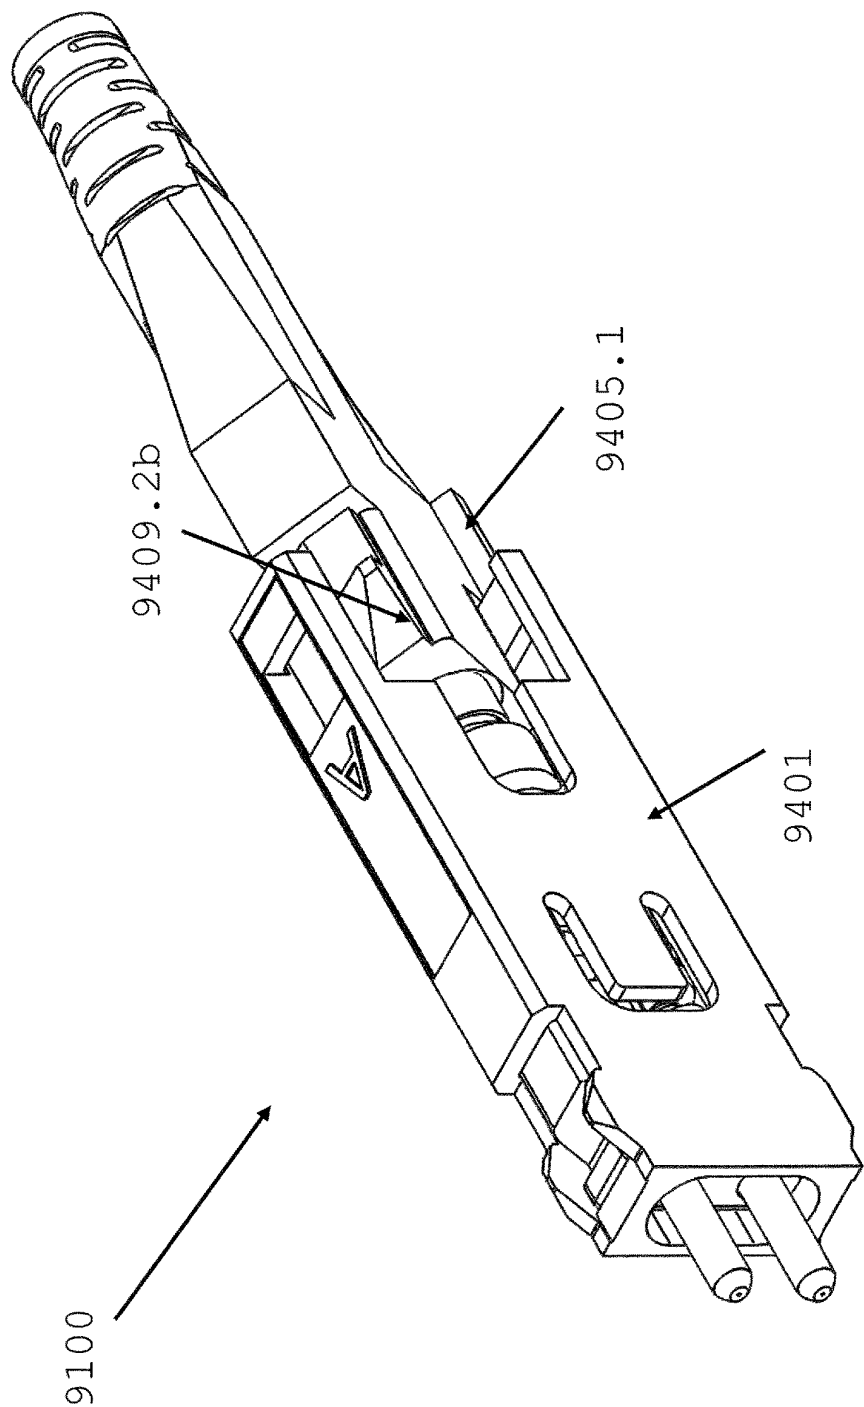


FIG. 32

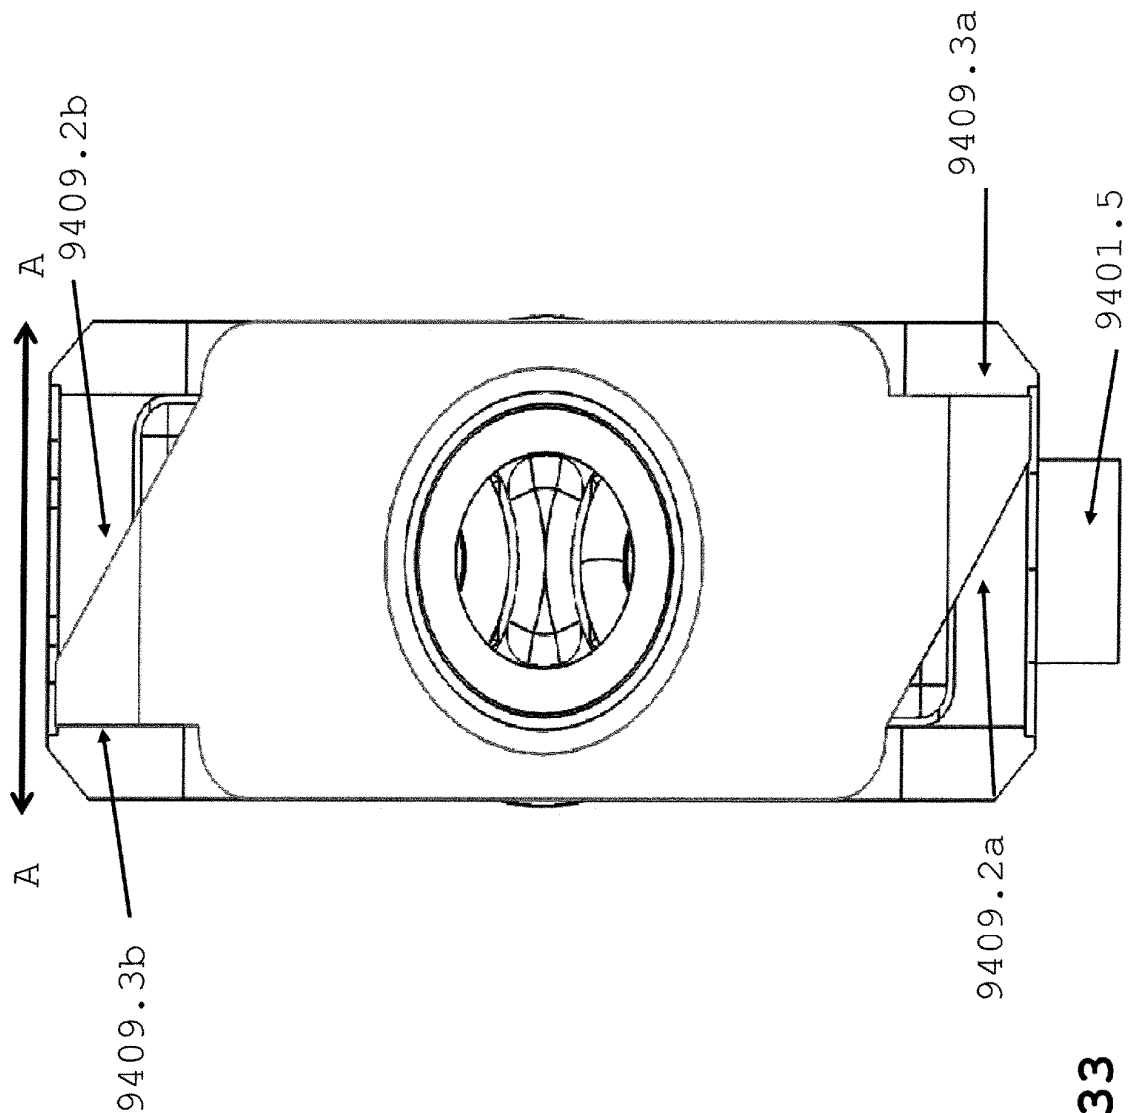


FIG. 33

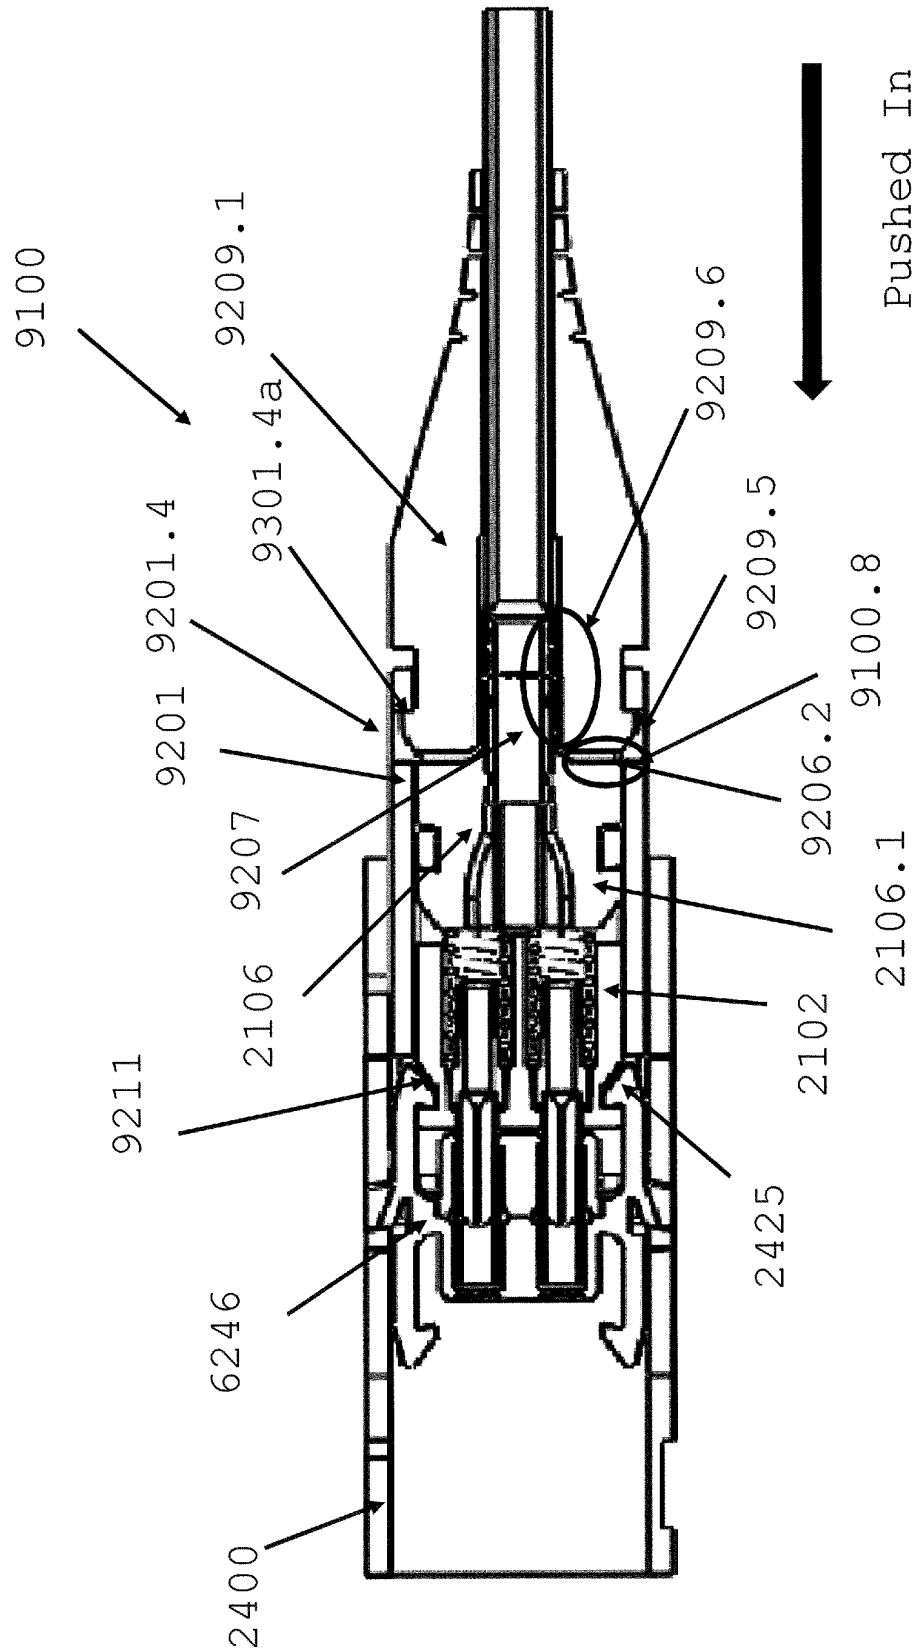


FIG. 34

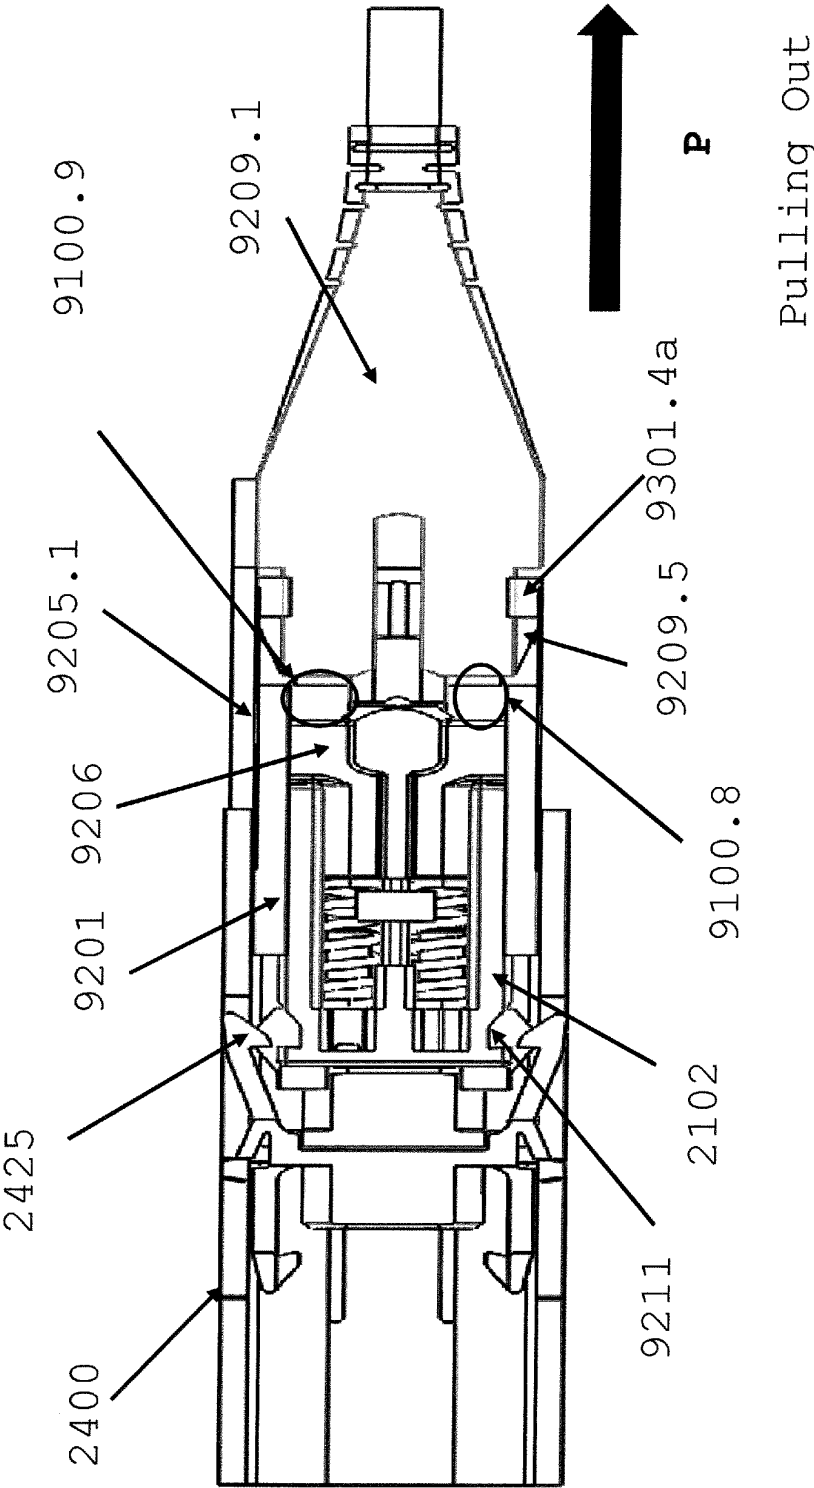


FIG. 35

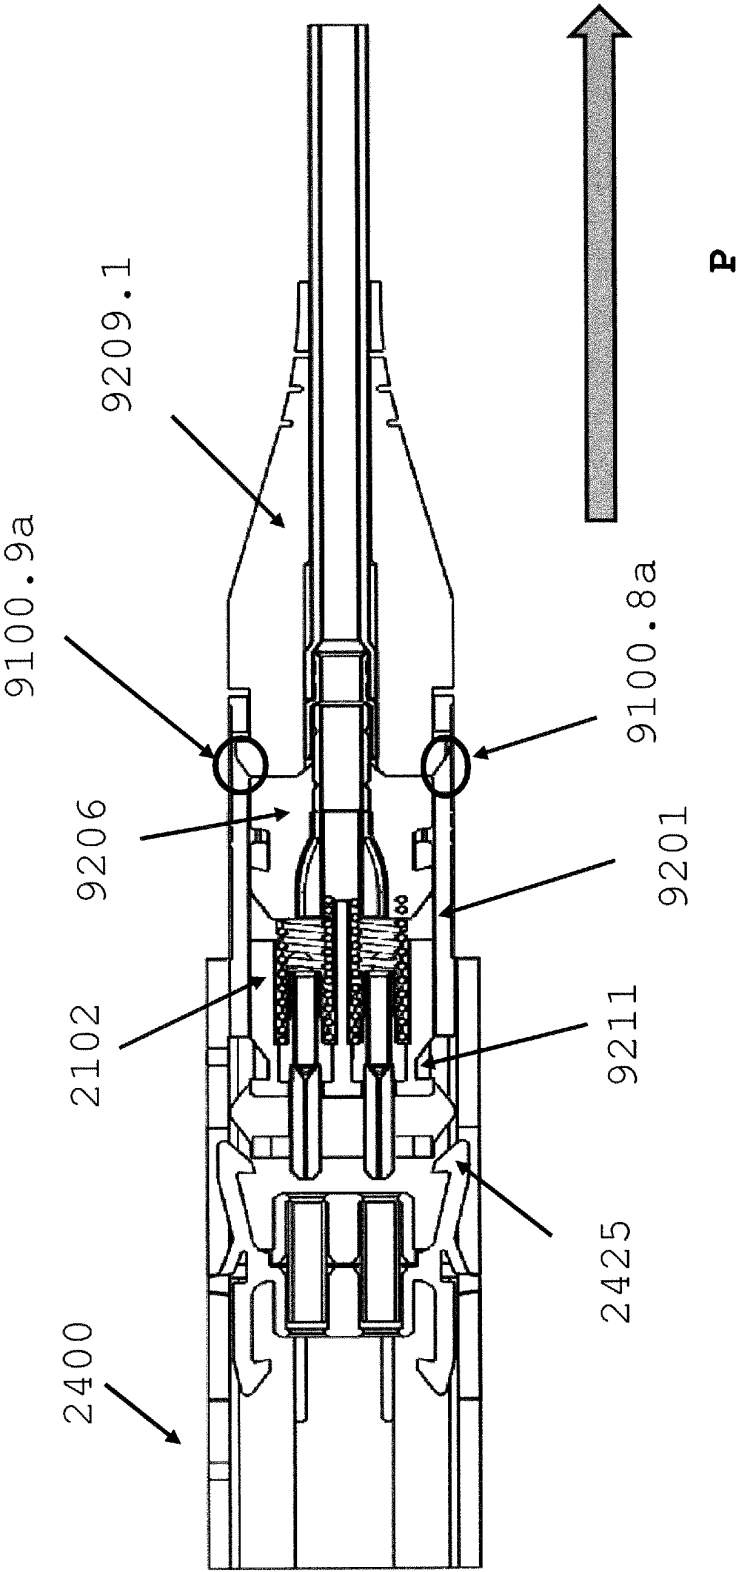


FIG. 36

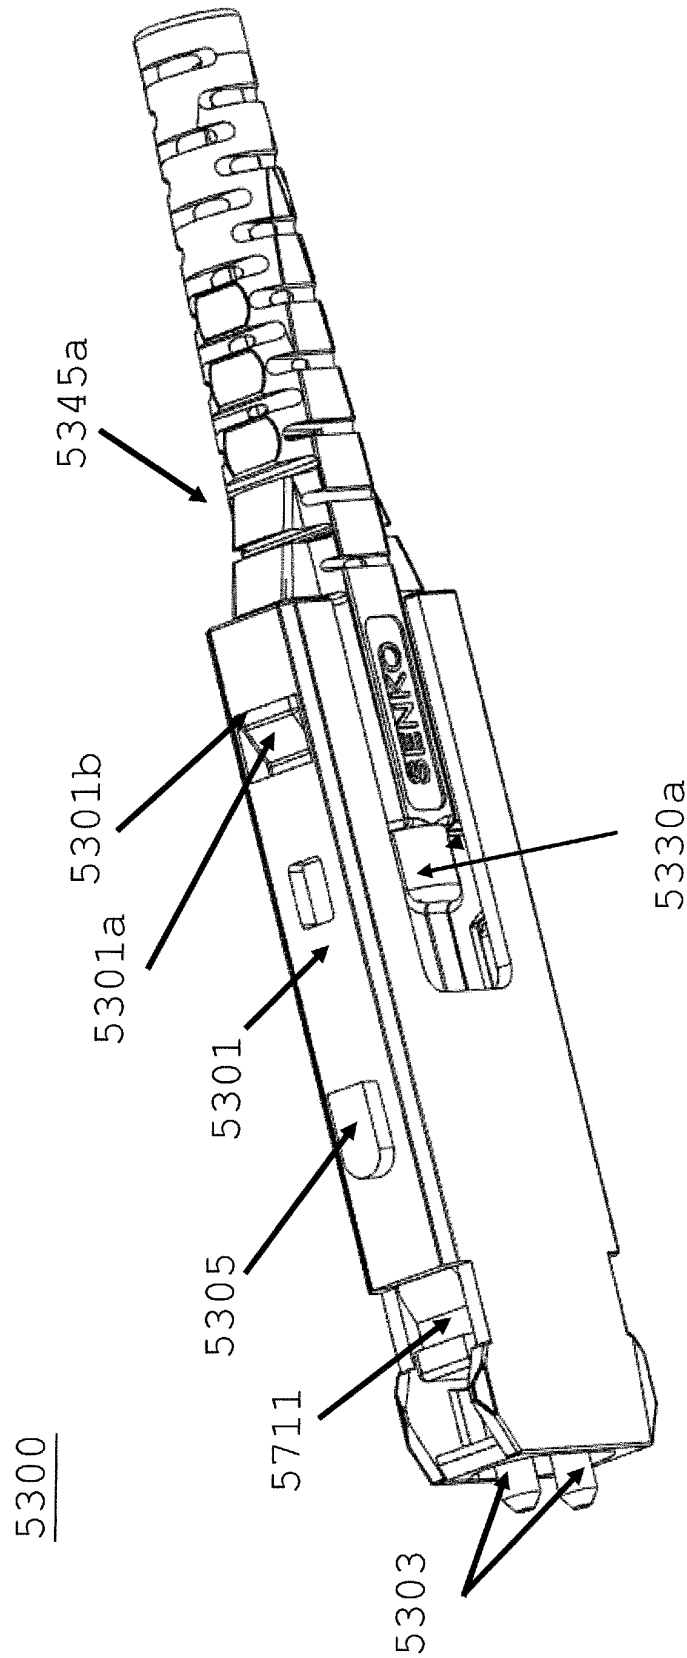


FIG. 37

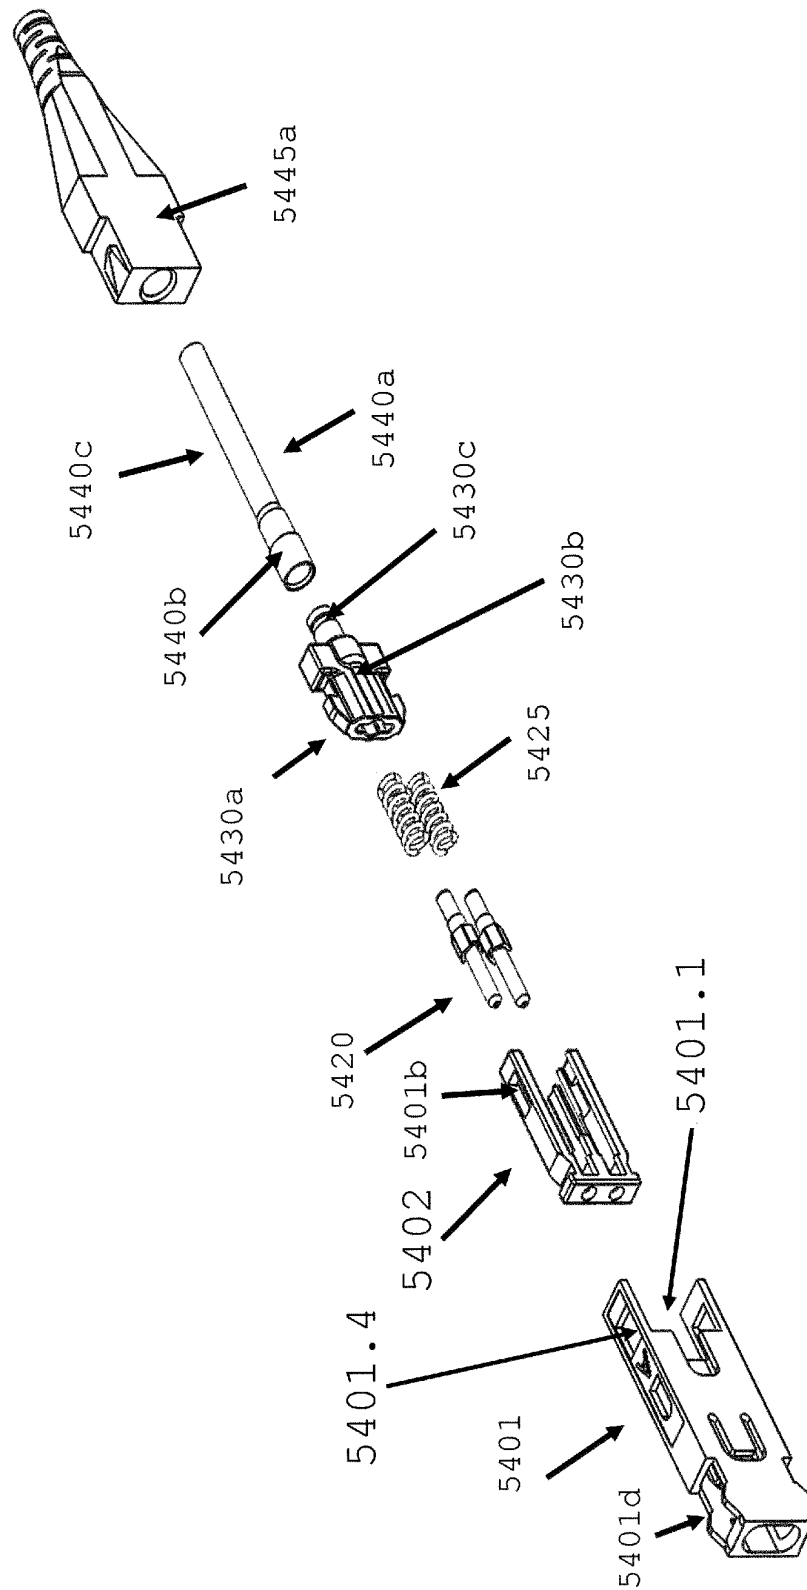


FIG. 38

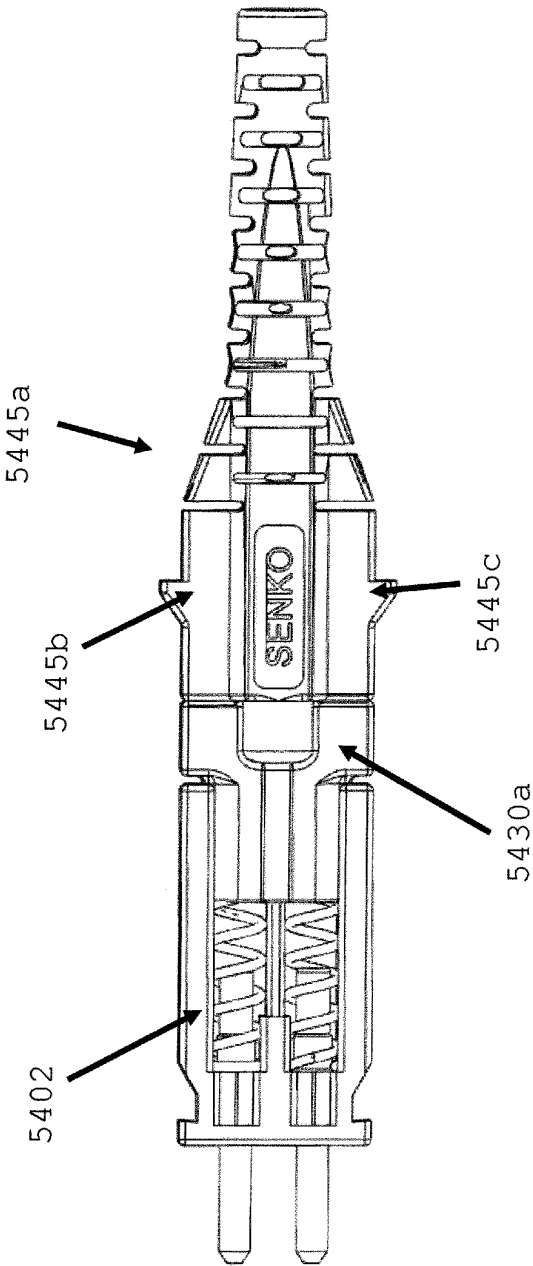


FIG. 39

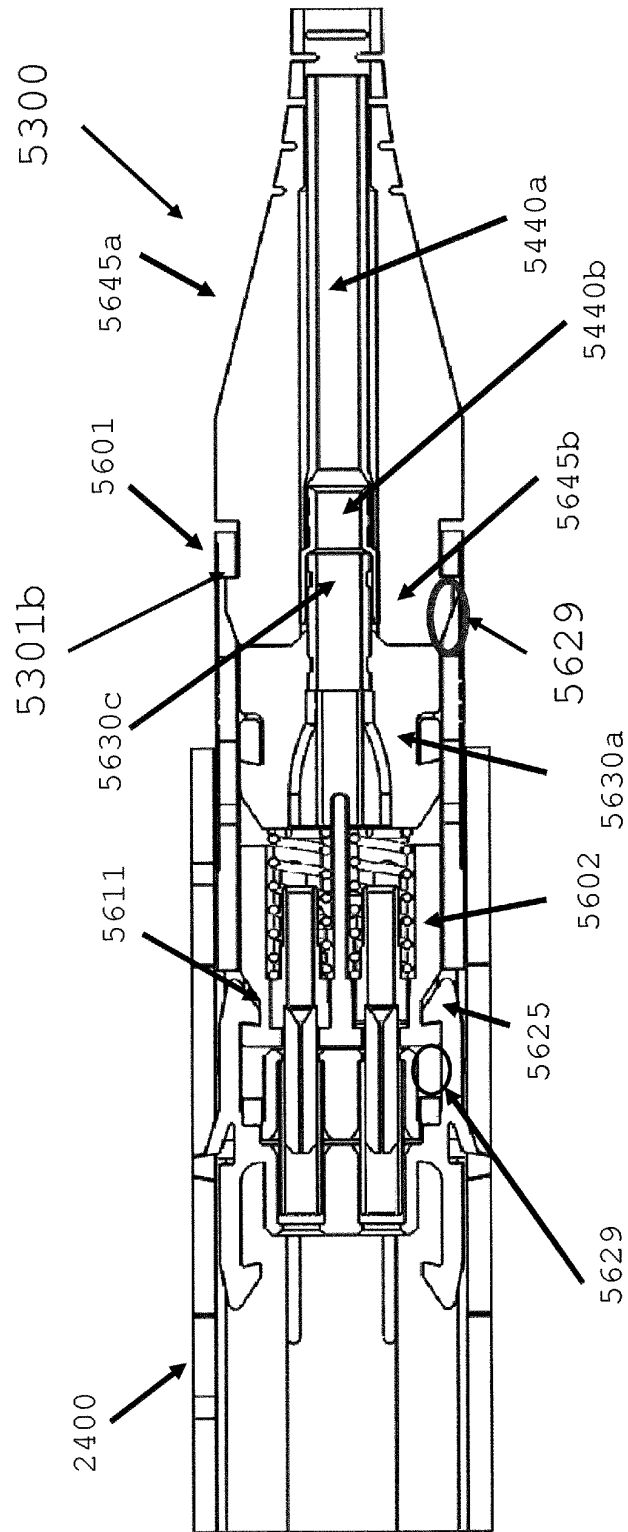


FIG. 40

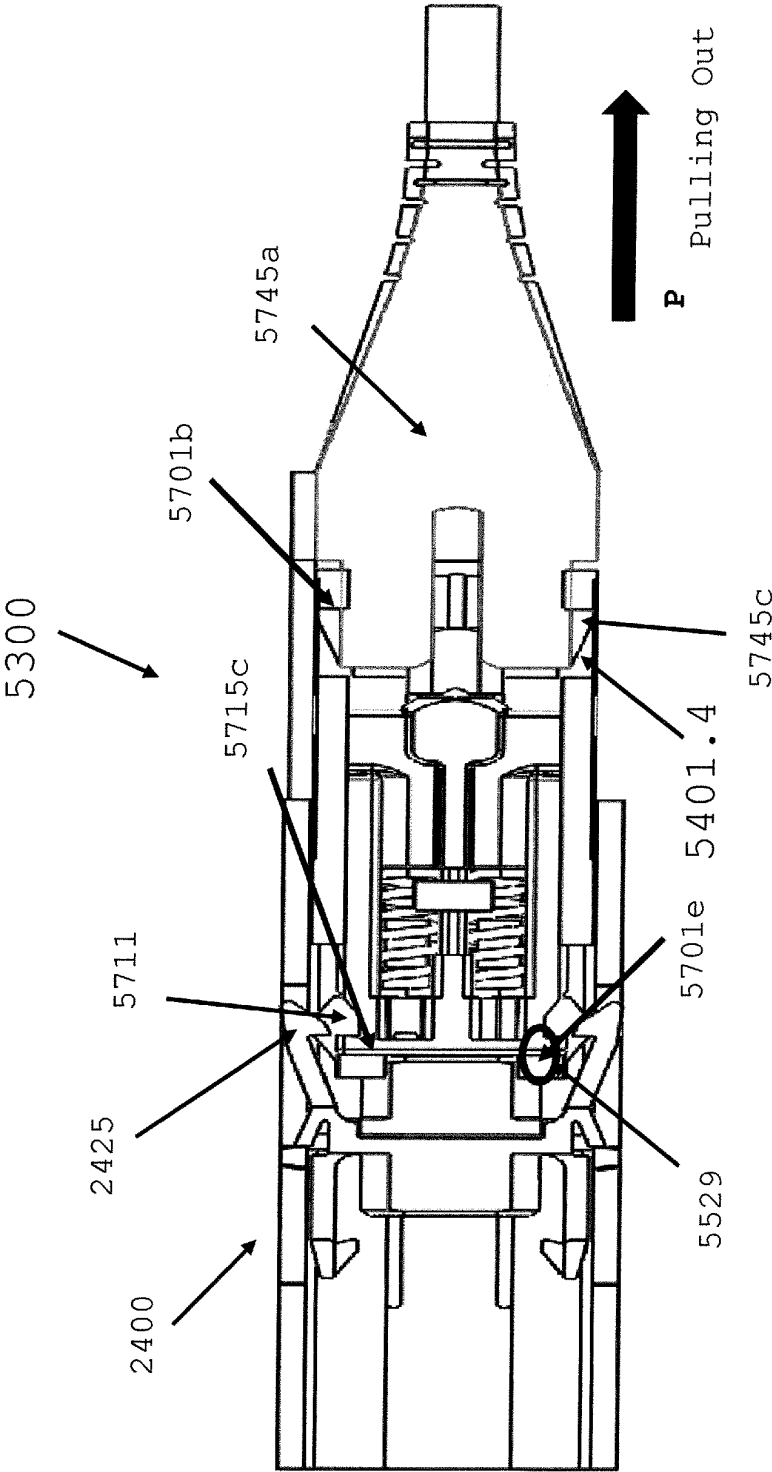


FIG. 41

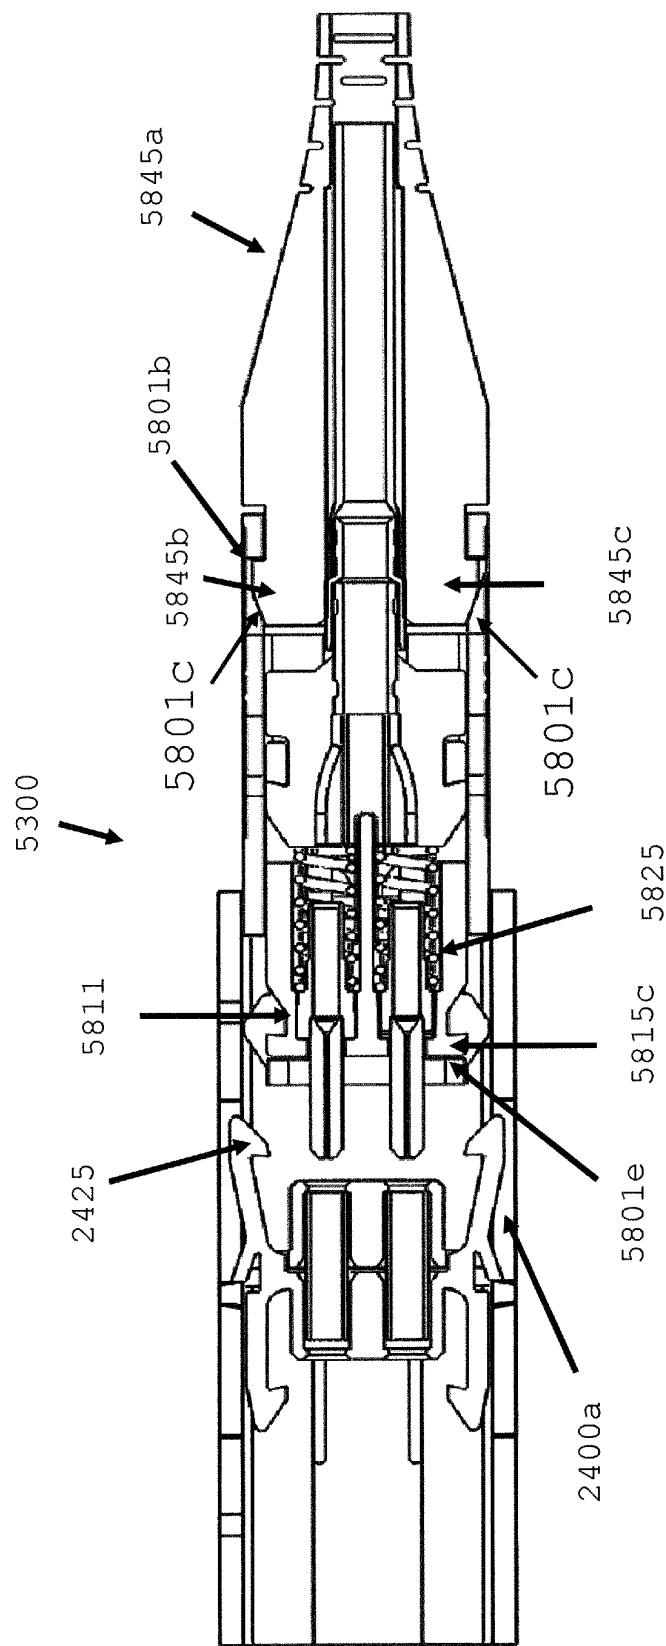


FIG. 42

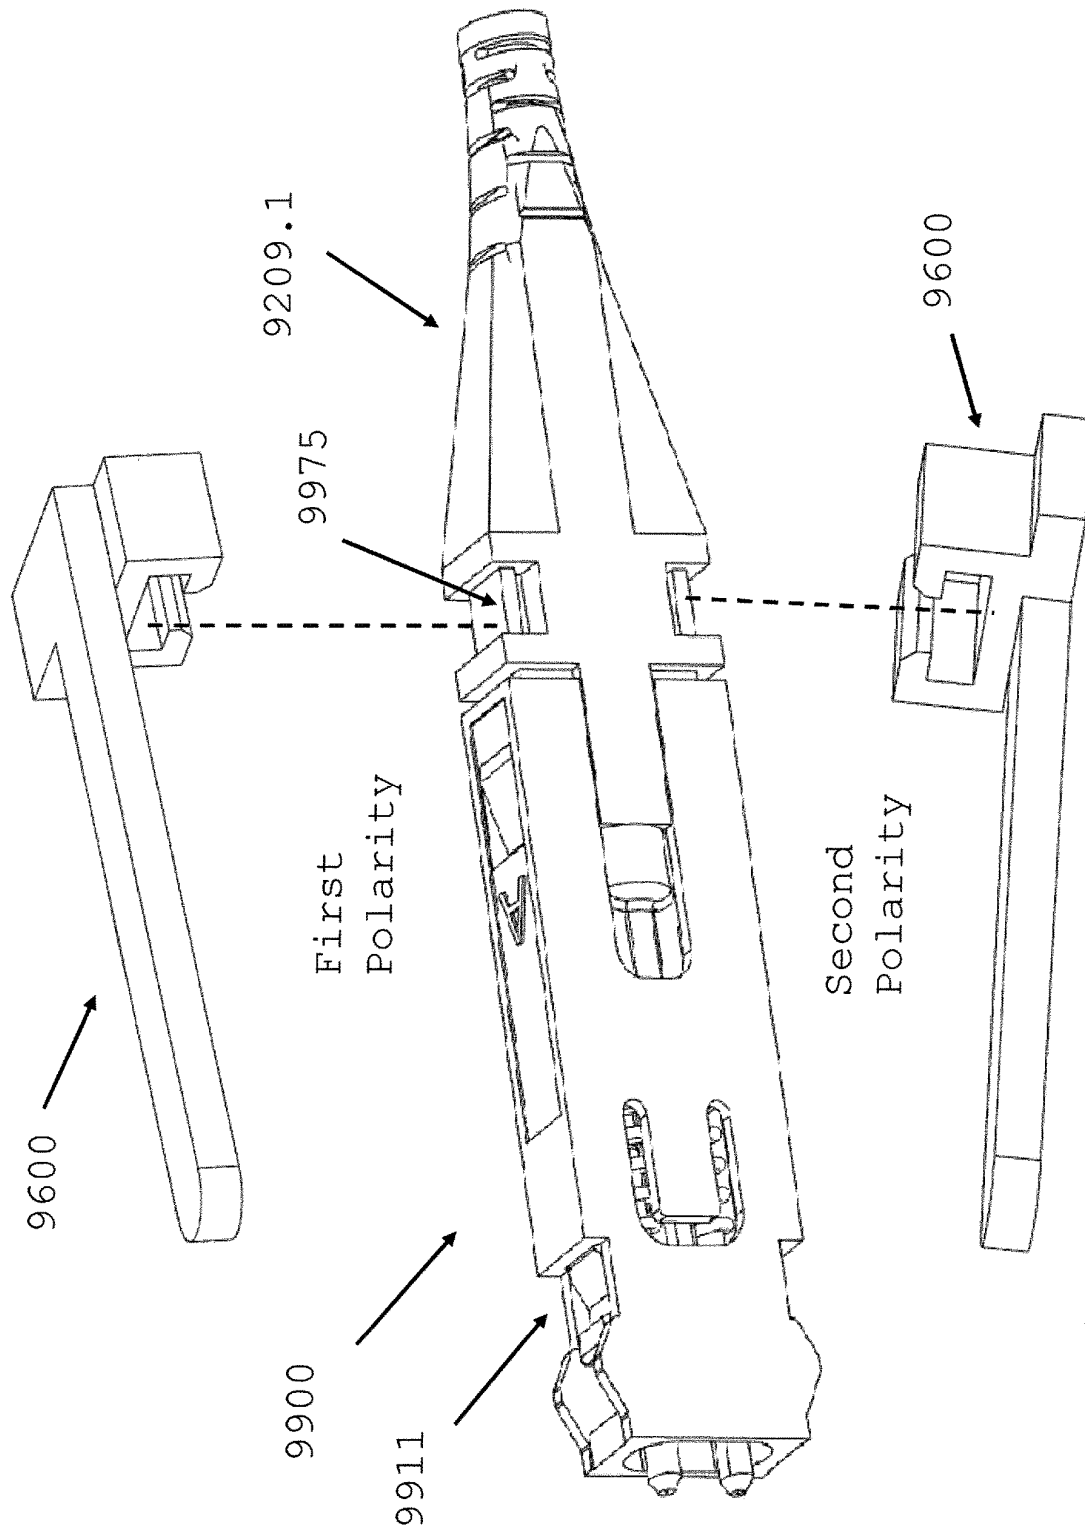


FIG. 43

FIG. 44


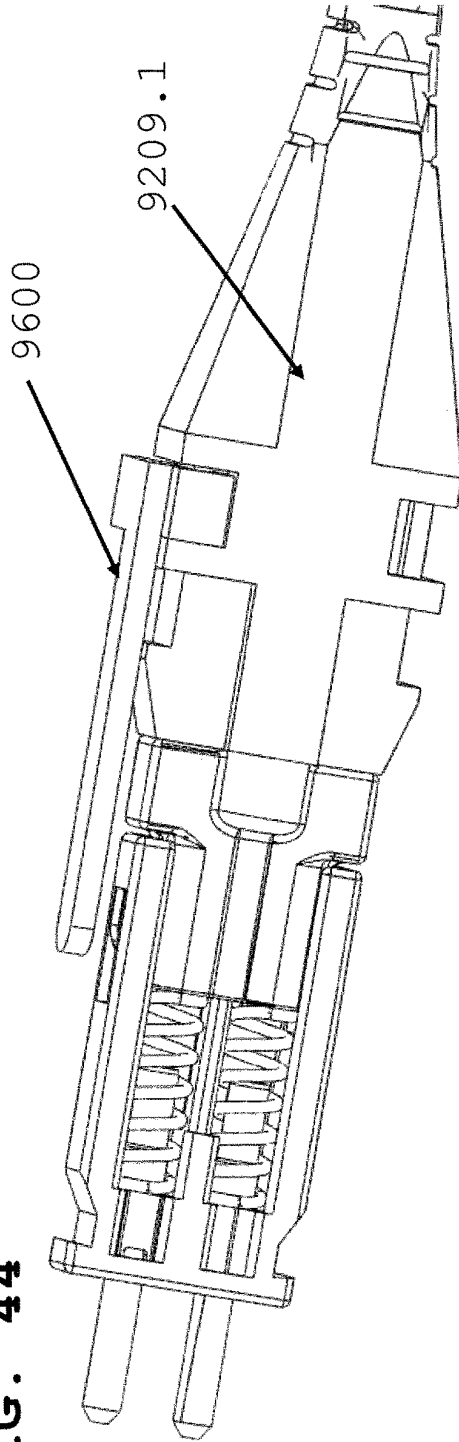


FIG. 45

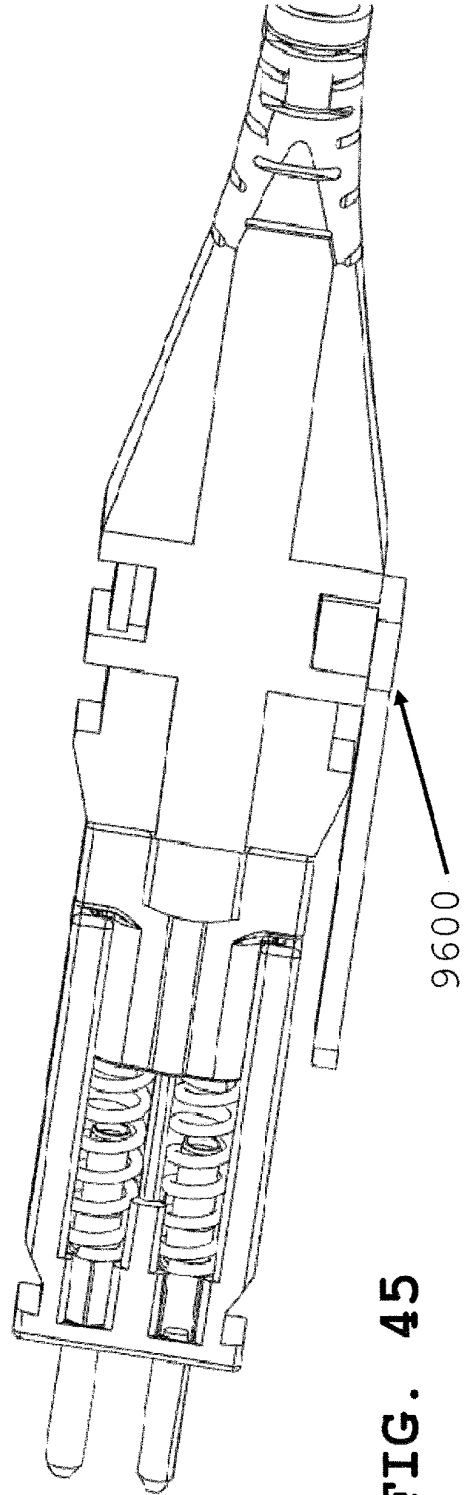

1

SMALL FORM FACTOR FIBER OPTIC CONNECTOR WITH MULTI-PURPOSE BOOT ASSEMBLY

RELATED APPLICATIONS

This application is a divisional under 35 USC 121 that claims priority to U.S. patent application Ser. No. 16/368,828, titled "Small Factor Fiber Optic Connector with Multi-Purpose Boot", filed on Mar. 28, 2018, which claims priority to U.S. Patent Application 62/649,539 titled "Micro Connector with Multi-Purpose Boot", filed on Mar. 28, 2018; and further claims priority to U.S. patent with Ser. No. 16/103,555 filed on Aug. 14, 2018 entitled "Ultra-Small Form Factor Optical Connectors Using A Push-Pull Boot Receptacle Release", which is a continuation in-part of U.S. patent application Ser. No. 16/035,691 filed Jul. 15, 2018, entitled "Ultra-Small Factor Optical Connectors", which claims priority from U.S. Provisional Application Ser. No. 62/588,276 filed Nov. 17, 2017; U.S. Provisional Application Ser. No. 62/549,655 filed Aug. 24, 2017; and U.S. Provisional Application Ser. No. 62/532,710 filed Jul. 14, 2017 all of the above applications are incorporated by reference in this non-provisional patent application.

FIELD OF THE INVENTION

The present disclosure relates generally to ultra-small form factor optical connectors, termed "micro optical connectors," and related connections within adapters and optical transceivers.

BACKGROUND

The prevalence of the Internet has led to unprecedented growth in communication networks. Consumer demand for service and increased competition has caused network providers to continuously find ways to improve quality of service while reducing cost.

Certain solutions have included deployment of high-density interconnect panels. High-density interconnect panels may be designed to consolidate the increasing volume of interconnections necessary to support the fast-growing networks into a compacted form factor, thereby increasing quality of service and decreasing costs such as floor space and support overhead. However, room for improvement in the area of data centers, specifically as it relates to fiber optic connects, still exists. For example, manufacturers of connectors and adapters are always looking to reduce the size of the devices, while increasing ease of deployment, robustness, and modifiability after deployment. In particular, more optical connectors may need to be accommodated in the same footprint previously used for a smaller number of connectors in order to provide backward compatibility with existing data center equipment. For example, one current footprint is known as the small form-factor pluggable transceiver footprint (SFP). This footprint currently accommodates two LC-type ferrule optical connections. However, it may be desirable to accommodate four optical connections (two duplex connections of transmit/receive) within the same footprint. Another current footprint is the quad small form-factor pluggable (QSFP) transceiver footprint. This footprint currently accommodates four LC-type ferrule optical connections. However, it may be desirable to accommodate eight optical connections of LC-type ferrules (four duplex connections of transmit/receive) within the same footprint.

2

In communication networks, such as data centers and switching networks, numerous interconnections between mating connectors may be compacted into high-density panels. Panel and connector producers may optimize for such high densities by shrinking the connector size and/or the spacing between adjacent connectors on the panel. While both approaches may be effective to increase the panel connector density, shrinking the connector size and/or spacing may also increase the support cost and diminish the quality of service.

In a high-density panel configuration, adjacent connectors and cable assemblies may obstruct access to the individual release mechanisms. Such physical obstructions may impede the ability of an operator to minimize the stresses applied to the cables and the connectors. For example, these stresses may be applied when the user reaches into a dense group of connectors and pushes aside surrounding optical fibers and connectors to access an individual connector release mechanism with his/her thumb and forefinger. Over-stressing the cables and connectors may produce latent defects, compromise the integrity and/or reliability of the terminations, and potentially cause serious disruptions to network performance.

While an operator may attempt to use a tool, such as a screwdriver, to reach into a dense group of connectors and activate a release mechanism, adjacent cables and connectors may obstruct the operator's line of sight, making it difficult to guide the tool to the release mechanism without pushing aside the adjacent cables. Moreover, even when the operator has a clear line of sight, guiding the tool to the release mechanism may be a time-consuming process. Thus, using a tool may not be effective at reducing support time and increasing the quality of service.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded view of a micro optical connector improved according to disclosed embodiments of push/pull and polarity change in present invention.

FIGS. 2-4 depict a technique polarity changing of the micro connector of FIG. 1

FIGS. 5-8 depict polarity changing according to another embodiment of the present invention of a micro-connector.

FIG. 9-11 depict inserting the micro-connector of FIG. 1 into an adapter.

FIG. 12 is a perspective view of a front body according to an embodiment of the present invention.

FIG. 13 is a perspective view of another embodiment of an adapter hook and alignment assembly.

FIG. 14 is a perspective view of micro connectors of FIG. 1 inserted into an adapter.

FIG. 15 is a perspective rear view of a group of micro connectors of FIG. 14.

FIG. 16 is a perspective view of a micro connector with multi-purpose push/pull-rotatable boot (FIG. 17) for insert/removal of connector from adapter and for polarity change.

FIG. 17 is a perspective view of multi-purpose rotatable boot assembly with an alignment and offset key releasable attached to the boot assembly.

FIG. 18 is a perspective view of an outer housing of the micro connector of FIG. 16.

FIG. 19 is a perspective view of front body and boot removed from FIG. 18 outer housing.

FIG. 20 is a perspective view of the micro connector in a first polarity position.

3

FIG. 21 is a perspective view of the connector of FIG. 20 being rotated in direction "R" to a second polarity.

FIG. 22 depicts micro connector of FIG. 20 being rotated further to the second polarity.

FIG. 23 depicts micro connector of FIG. 20 in the second polarity.

FIG. 24 is side view of micro connector of FIG. 16 with a cross section cut "A-A".

FIG. 25 is a view along cross section cut "A-A" of the micro connector of FIG. 16 in a first polarity position.

FIG. 26 is an end view of the boot assembly illustrating an opening for fiber optic cabling.

FIG. 27 is a perspective view of end of a back body, with fiber optic cabling.

FIG. 28 is perspective view along cross section "A-A" at a start of boot rotation to change a micro connector from a first polarity to a second polarity.

FIG. 29 is perspective view along cross section "A-A" in furtherance of boot rotation to change the micro connector from a first polarity to a second polarity.

FIG. 30 is a perspective view of the micro connector in furtherance of boot rotation.

FIG. 31 is a perspective view along cross section "A-A" just prior to completion to a second polarity of the micro connector.

FIG. 32 is a perspective view of the micro connector just prior to completion to a second polarity.

FIG. 33 is a perspective view along cross section "A-A" of micro connector FIG. 16 in a second polarity position.

FIG. 34 is a perspective view along a longitudinal cross section of a micro connector of FIG. 16, latched into an adapter receptacle with multi-purpose rotatable boot assembly biased forward or pushed in.

FIG. 35 is a perspective view of FIG. 34 as multi-purpose rotatable boot assembly is partially pulled in direction "P".

FIG. 36 is a perspective view of FIG. 34 as multi-purpose rotatable boot assembly (FIG. 17) is release from adapter hook but still under influence of pulling force "P".

FIG. 37 is perspective view of a micro connector with another push/pull release embodiment incorporated therein.

FIG. 38 is an exploded view of FIG. 37 connector.

FIG. 39 is a side perspective inner view of a micro connector of FIG. 37 without an outer housing.

FIG. 40 is a cross-section view of connector of FIG. 37 latched into a receptacle.

FIG. 41 is a cross-section view of connector of FIG. 37 partial removed using push/pull release boot according to the present invention.

FIG. 42 is a cross-section view of connector of FIG. 37 released from an adapter receptacle.

FIG. 43 is an exploded view of another embodiment of a micro connector with a releasably attached clip defining a first and a second polarity.

FIG. 44 is an assembly view of the micro connector of FIG. 43 in a first polarity.

FIG. 45 is an assembled view of the micro connector of FIG. 43 in a second polarity.

DETAILED DESCRIPTION

The following terms shall have, for the purposes of this application, the respective meanings set forth below.

A connector, as used herein, refers to a device and/or components thereof that connects a first module or cable to a second module or cable. The connector maybe configured for fiber optic transmission or electrical signal transmission. The connector may be any suitable type now known or later

4

developed, such as, for example, a ferrule connector (FC), a fiber distributed data interface (FDDI) connector, an LC connector, a mechanical transfer (MT) connector, a square connector (SC) connector, an SC duplex connector, or a straight tip (ST) connector. The connector maybe generally defined by a connector housing body. In some embodiments, the housing body may incorporate any or all of the components described herein.

A "fiber optic cable" or an "optical cable" refers to a cable containing one or more optical fibers for conducting optical signals in beams of light. The optical fibers can be constructed from any suitable transparent material, including glass, fiberglass, and plastic. The cable can include a jacket or sheathing material surrounding the optical fibers. In addition, the cable can be connected to a connector on one end or on both ends of the cable.

Various embodiments described herein generally provide a remote release mechanism such that a user can remove cable assembly connectors that are closely spaced together on a high density panel without damaging surrounding connectors, accidentally disconnecting surrounding connectors, disrupting transmissions through surrounding connectors, and/or the like. Various embodiments also provide narrow pitch LC duplex connectors and narrow width multi-fiber connectors, for use, for example, with future narrow pitch LC SFPs and future narrow width SFPs. The remote release mechanisms allow use of the narrow pitch LC duplex connectors and narrow width multi-fiber connectors in dense arrays of narrow pitch LC SFPs and narrow width multi-fiber SFPs.

FIG. 1 depicts an embodiment of micro optical connector 2100, shown in exploded view. Micro optical connector 2100 may include outer housing 2101, front body 2102, one or more ferrules 2103, one or more ferrule flanges 2104, one or more springs 2133, back body 2106, the latter has a wing 2106.1 on the top and bottom of the body, the wing 2106.1 is secured within an opening 2119 at a distal end of front body 2102, back post 2107, crimp ring 2108, and boot 2109. Front body 2102 side walls are open not closed, a channel 2194 for aligning ferrule flanges 2104, and an alignment sleeve opening 2113 to accept ferrule 2103. Outer housing 2101 may include a longitudinal bore for accommodating front body 2102 and ferrule 2103, springs 2133 and back body 2106, connector alignment key 2105 used during interconnection, connector flap 2101.1 and an optional pull key 2110 to facilitate removal of connector 2100 when connected in a dense array of optical connectors. Optionally, the ferrules may be LC-type ferrules having an outer diameter of 1.25 mm. Connector flap 2101.1 secures front body 2102 within outer housing 2101. Alignment key 2105 is also used as blocking structure to indicated connector polarity orientation as disclosed herein. Polarity is determined by the ferrules 9203 (Refer to FIG. 19), where a first ferrule is for Tx or transmit and a second ferrule is for Rx or receive. As known in the art, a mismatch of ferrules 9203 with opposing ferrules secured in an opposing adapter port, the signal would be lost. Alignment key performs a dual function, when the boot assembly is rotated, the alignment key is repositioned, so upon insertion into an adapter, the connector can be blocked by the key. This in effect disallows the user to insert the connector within the adapter receptacle, thus, preventing a mismatch of signal between opposing connectors across an adapter interface. As disclosed below, starting at FIG. 18 an additional aid may be markings located on the connector housing, indicating "A" or "B" polarity of the connector ferrules after rotating the boot.

5

As depicted FIGS. 2-4, FIG. 2 micro connector 3700 includes an assembled front body 3702 that may be removed from outer housing 3701, rotated 180° as indicated by the arrow (FIG. 3), and re-inserted into the outer housing (FIG. 4). This allows for a change in the polarity of the connector by removing and rotating front body 3702, and therefore the ferrules can be switched quickly and easily without unnecessarily risking the delicate fiber cables and ferrules. Referring to FIG. 2, micro connector 3700 is fully assembled. To remove front body 3702 to change connector polarity, as shown in FIG. 3, one or more flex key 3703 are lifted outward to release front body 3702 for removal in rearward in the direction of the arrow “<”. Referring to FIG. 4, to complete the polarity change, after rotating front body 3702 by 180 degrees as shown in FIG. 3, front body 3702 is inserted into the outer housing in the direction of arrow “F”.

FIG. 5 depicts the operation of the polarity change mechanism using outer housing 5301 (refer to FIG. 6), where pull key 5310 is integrated with the outer housing. In FIG. 5, micro connector 5300 is fully assembled. The user inserts a tool in access slot 5329 and lifts off outer housing 5301, instead of flexible keys 3703 (refer to FIG. 3). Front body 5302 is removed with the boot and cable attached as shown in FIG. 6. Turning to FIG. 7, the outer housing 5301 is rotated 180 degrees, as shown by the arrow “R”, and placed back over front body 5302 in the direction of the second arrow as shown. The reversed polarity micro connector 5300 is shown fully assembled in FIG. 8.

Referring to FIG. 9, micro connector 5300 is shown just prior to insertion into adapter 5600. Connector 5300 is partially inserted in FIG. 10, wherein connector hook (or adapter hook) 5525 has not yet been seated in the connector recess 5511, and FIG. 11 depicts hook 5525 seated in recess 5511, in direction of arrow “A”.

Referring to FIG. 12, front body 6102 has two cutouts 6119 and 6121 and an extended middle wall 6110. Cutout 6121 engages the outer housing hooks (not shown) that replaces flex key 3703 to secure the outer housing to the front body. Cutout 6121 secures the polarity change key 5310. Cutout 6119 secures back post 2106 to front body 6102 via back post front body hook 2106.1 (refer to FIG. 2). The material is saved at back post 2106 overmolding, by not using the flex key, and this saved material to reinforce the middle wall to better help support the ferrule springs from bending and thus help prevent distorting the ferrules. This reduced material also allowed a reduction in the connector size contribution to a 3.1 mm ferrule to ferrule pitch as shown in FIG. 12. This distortion can increase insertion loss. Connector recess 6111 is located at the proximal end of front body 6102, and the recess engages and locks with connector hook 5525. Referring to FIG. 13, adapter hook 6246 added chamfers (6242, 6226) to adapter (connector) hook surfaces to improve installation of the connector into the adapter when connector ramps 5512 engage adapter (connector hook) 5525. Refer to FIG. 5). Adapter hook assembly has an alignment sleeve holder 6227 that accepts one or more ferrules from the micro connector, and aligns the ferrules 9203 with opposing ferrules of a second micro connector (not shown).

FIG. 14 illustrates a group of micro connectors 7500A inserted into an adapter 5700. Adapter 5700 has plural of slots 5700a configured to accept an alignment key 7500A.1 proximal on the alignment and offset key (7500A, 9105.1).

Alignment key, and alignment and offset key is defined as a protrusion adjacent to a side of the connector housing.

FIG. 15 depicts alignment and offset key 7500B with the group of micro connectors 7500A of FIG. 14. Alignment/

6

offset key 7500B adds stability and reduces misalignment during insertion when key 7500B acts as a support between connectors as shown. Key 75008 also helps determine polarity of the micro connector, as described herein.

Referring to FIGS. 16-17, FIG. 16 depicts micro connector 9100 with an alignment and offset key 9105.1 having an offset portion 9123. Offset portion 9123 engages a top surface of a side bar ledge 9124 for aligning connector 9100 into a multi-receptacle adapter next to another micro connector. Side bar ledge 9124 is located further back or nearer a distal end of a connector (e.g. closer to the cable) where side bar ledge 9124 is part of a multi-purpose rotatable boot 9109.1. Micro connector 9100 outer housing 9101 is secured to boot 9100.1 via boot hooks 9109.5 (FIG. 17) that engages second slot 9201.4a and 9201.4b in connector housing 9201 (as shown in FIG. 18), when in polarity status “B” or status “A”, as depicted on outside of micro connector housing. Multi-purpose boot is rotatable in the direction of arrow “R”.

Referring to FIG. 17, multi-purpose rotatable boot 9109.1 comprises releasably attached alignment and offset key 9105.1, releasable at release point 9109.6, also refer to FIG. 43. Alignment and offset key 2105 may be fixed on connector outer housing, as shown in FIG. 1 or at alignment key 5305 disclosed in FIG. 37. The alignment key may have not offset portion as disclosed in FIG. 1 and FIG. 37, without departing from the scope of the invention, that the boot assembly is rotatable as disclosed in FIGS. 26-27 and FIGS. 25-33 and FIGS. 43-45. It is the key protruding from the connector housing that is determines polarity upon rotation of the boot assembly as disclosed herein. Alignment key (2105, 9405.1, 5305, 9600) or similar structure protruding from the outer connector housing repositioned by the rotating boot assembly and the key interaction with adapter structure that determines polarity as described herein. Referring to FIG. 17, key 9105.1 has a securing protrusion 9105.2 at a proximal end that engages first slot 9201.3b in connector housing 9201 (refer to FIG. 18) to further secure multi-purpose rotatable boot assembly 9109.1 to front body 9202 or outer housing 9201. Multi-purpose rotatable boot assembly 9109.1 comprises a body 9109.1a with a passageway along line P-P for passing a fiber optic cable (refer to FIG. 26 and FIG. 27) to the ferrules to complete the signal path.

Referring to FIG. 18, outer housing 9201 is shown in a Second Polarity orientation “B” comprising corresponding first slot 9201.3b and second slot 9201.4b. Multi-purpose rotatable boot assembly 9209.1 (FIG. 19) is inserted at a distal end of connector housing 9201 shown in the direction of arrow “T”. Second slot 9201.4a corresponds to polarity position “A”.

Referring to FIG. 19, multi-purpose rotatable boot assembly 9209.1 comprises alignment and offset key 9205.1, as described herein boot hook 9209.5, side bar ledge 9024 that is configured (as described herein) to engage back body 9206, front body 9202 and plural of ferrules 9203. Side bar ledge 9024 accepts offset key 9023 of a second connector when two connectors are inserted into an adapter. This allows connectors to be inserted side by side into an adapter more easily, without jamming. The proximal end (or ferrules 9203 end) of assembly 9209.1 is inserted into a distal end of the outer housing 9201 (FIG. 18) in the direction of arrow “I”. Upon insertion, the outer housing 9201 engages with multi-purpose rotatable boot assembly 9209.1 as shown by the dotted lines between first slot 9201.3b and second slot 9201.4b, engaging securing protrusion 9205.2 on alignment and offset key 9205.1 and boot wing 9209.5. The wing and securing protrusion are received second slot and first slot described in FIG. 18 outer housing.

Referring to FIG. 20, front body **9302** and boot assembly **9309.1** are assembled in micro connector housing **9301** with alignment and offset key **9305.1** in a first polarity position.

Referring to FIG. 21, multi-purpose rotatable boot assembly **9309.1** is rotated in direction “R” to convert from a first polarity “A” (refer to FIG. 20) to Second Polarity “B” (refer to FIG. 23), with alignment and offset key **9305.1** 180 degrees or opposite the first polarity position as depicted in FIG. 20, to Second Polarity position “B”. Boot rotation key **9305.1** may be sized as disclosed in FIG. 1. Boot hook **9209.5** further comprises chamfer **9309.2**. Chamfer **9309.2** engages wall **9301.5** of connector outer housing and chamfer **9309.2** lifts boot hook **9209.5** out of a distal end of connector housing **9301** and is freed from second slot **9201.4b**, and securing protrusion **9105.2** (refer to FIG. 17 and shown in FIG. 20) lifts out of first slot **9201.3b** thereby allowing the boot assembly to rotate as shown in the direction “R”, FIG. 21. Chamfer **9309.2** may engage wall **9301.5** using an angle or chamfer cut opposite current chamfer **9309.2** to allow for rotation in the opposite direction of FIG. 21. Rotation of boot assembly **9309.1** changes connector **9100** from a first polarity “A”, as depicted in FIG. 20, to Second Polarity “B”, as depicted in FIG. 19 (without connector housing) and FIG. 32. Boot assembly may be rotated in a clockwise direction, without departing from the scope of the invention.

Referring to FIG. 22, further rotation of boot assembly **9309.1** results in a change to a second polarity as shown in FIG. 23, with alignment and offset key secured within polarity “B” first slot **9201.3b**.

Referring to FIG. 23, side bar ledge **9023** (as well as alignment key **9305.1**) is in Second Polarity position or “B” polarity, and when the micro connector is inserted into an adapter (not shown), the micro connector is oriented with key **9305.1** in an opposite position to FIG. 20, so key may be blocked by corresponding adapter structure (not shown). If micro connector **9100** is blocked by adapter structure this means the micro connector is not in the correct polarity orientation to make a fiber to fiber connection via an adapter to an opposing fiber optic connector or transceiver as is known in the art. After rotation, the ferrules are reversed the top ferrule is now the bottom ferrule, and this results in a second polarity configuration. The second polarity being different from the first polarity, that is, Rx receive signal is now Tx transmit signal path and vice versa. Alignment and offset key **9405.1** has been switch from a First Polarity “A” to Second Polarity “B”.

FIG. 24 is the micro connector **9100** with a cross section along “A-A” line as shown in FIGS. 25 through 33 further illustrating polarity change using multi-purpose rotatable boot assembly **9209.1**. Longitudinal cross section is provided along line “B-B” in various drawings of this application. “L-L” is the longitudinal axis of the connectors in the present invention.

Referring to FIG. 25, a front view of the cross-section cut “A-A” of the micro connector of FIG. 24 (also FIG. 16) further comprises an opening through which fiber cabling (not shown) travels, and crimp ring surface **9407.1** that is further surrounded by inner round **9409.4**. Referring to FIG. 26, inner round **9409.4** engages a back post surface **9406.7** formed as an outer round shown at FIG. 27, as the assembly **9209.1** is rotated. Inner round and outer round form mating surfaces that can freely rotate thereby allowing multi-purpose boot assembly to be rotated about fiber optic connector housing. Referring back to FIG. 25, boot hook **9109.5** further comprises first chamfer **9409.2a** and first stopping wall **9409.3a**, and second chamfer **9409.2b** and second

stopping wall **9409.3b**, in a first polarity position. Boot hooks **9109.5** rotate between second slot **9201.4a** and second slot **9201.4b** during polarity change. Second slot **9201.4a** corresponds to the connector being in a “A” polarity position. Likewise, second slot **9201.4b** corresponds to the connector being in “B” polarity configuration. Securing protrusion **9405.1** resides in first slot **9201.3a** for “A” polarity, and then resides in first slot **9201.3b** for “B” polarity after boot release **9309.1** rotation.

Referring to FIG. 28, rotating of the boot assembly is started and chamfer **9409.2a** engages connector housing wall **9301.5** and begins to lift first boot wing **9109.5a** out of second slot **9201.4a**. Likewise, a second boot wing **9109.5b** is rotating out of second slot **9201.4b**.

Referring to FIG. 29 upon further rotation in direction “R”, securing protrusion **9105.2** (refer to FIG. 20) on alignment and offset key **9405.1** is lifted out of first slot **9201.3a** (refer to FIG. 20 and FIG. 21), and boot wing **9109.5a** is lifted out of second slot **9201.4a** at a top surface and upon 180 degree rotation, securing protrusion **9105.2** (refer to FIG. 20) is accepted into first slot **9201.4b** at a bottom surface of the outer housing **9401**. Boot wing **9109.5b** moves out of second slot **9201.4b**.

Referring to FIG. 30, the rotation of boot assembly **9409.1** is shown as it exits the outer housing **9401** of connector **9100**. Chamfer **9409.2b** exits first from this view. Alignment and offset key **9405.1** is moving around the outer housing body in a counter-clockwise direction, in this view to a Second Polarity position “B”.

Referring to FIG. 31, alignment and offset key **9405.1** is almost in a second polarity position as shown, with chamfer **9409.2b** in an opposite orientation to itself in FIG. 25. Referring to FIG. 32, connector **9100** shows chamfer **9409.2b** in the opposite position to that of FIG. 30, indicating the connector is close to its second polarity configuration with alignment and offset key **9405.1** at bottom surface of outer housing **9401**. FIG. 33 depicts connector **9100** along cross section “A-A” in its second polarity position, with chamfer **9409.2b** in second slot **9401.4a** at the top surface of outer housing **9401**. Polarity key **9405.1** is at the bottom surface of outer housing **9401** indicating the connector is in a second polarity configuration.

Referring to FIG. 34 a micro connector **9100** is shown along cross section “B-B” (refer to FIG. 24) in a latched position within a receptacle of adapter **2400**. During rotation of the multi-purpose rotatable boot assembly **9209.1**, boot wing **9209.5** operates as described above in FIGS. 25-33. This is accomplished by gap **9209.6** between boot assembly **9209.1** that allows “free-wheeling” about crimp ring **9207** as inner round **9409.4** engages back post face surface **9406.7** as described in FIGS. 26-27. Rotating boot assembly while connector is in a latched position within adapter, boot assembly wing **9209.5** facing surface is in contact with facing surface **9206.2** of back post **2106**, as shown at interface **9100.8**. Still referring to FIG. 34, boot wing **9209.5** face engages and releaseably locks with corresponding surface **9301.4a** of second slot **9201.4** of outer housing **9201**, FIG. 18 and FIG. 21. Micro connector **9100** is latched and unlatched in an adapter **2400** receptacle using push/pull boot assembly or push/pull key as described in FIGS. 9-11, or FIGS. 34-36, or FIGS. 37-42. Adapter hook **2425** is seated in connector recess **9211** located in front body **9202**. In this position, boot assembly **9209.1** is up against back body **2106** as shown at interface **9100.8**, as shown by direction of arrow “Pushed In”.

Referring to FIG. 35, boot assembly **9209.1** is being pulled rearward in the direction of “P”. Boot assembly

9

9209.1 is pulled a release distance “d” to interface 9100.8, 9100.9 to unlatch connector from adapter interface. At the same time, adapter hook 2425 is being lifted out connector recess 9211 as micro connector 9100 is removed from adapter 2400 receptacle. Boot assembly 9209.1 moves a distance “d” because boot wing 9209.5 engages outer housing face 9301.4a, and pulls outer housing 9201 rearward. Outer housing 9201 is pulled rearward connector 9100 is released from this the amount of separation between the distal end of the back body and proximal end of boot assembly 9209.1. This distance matches channel distance, FIG. 36, 9100.9a, 9100.8a in which boot hooks slide upon pulling connector from adapter using rotatable boot assembly. Hooks 2425 lift out of recess 9211 located at a proximal end of front body 2102, when boot assembly 9209.1 is pulled rearward at least this distance.

Referring to FIG. 36, once boot assembly 9209.1 is fully pulled in direction of “P”, connector 9100 is released from within adapter 2400. Adapter hook 2425 is completely out of connector recess 9211, and maximum pulling distance. Once the pull force, “P”, is release from boot 9209.1, interface distance 9100.8 returns to that of FIG. 34, upon release of pull force “P”, on boot assembly 9209.1.

FIG. 37 depicts connector 5300 with push/pull boot assembly 5345a at its distal end receiving a fiber cable with a plural of fiber strands therein, and a proximal end configured to connect and secure to back body assembly 5330a secured with outer housing 5301. Outer housing 5301 has alignment key 5305, further has opening 5301a with stop face 5301b that boot wings (5445b, 5445c) (refer to FIG. 38) engage when boot assembly 5345a is pulled in a distal direction fully to release connector 5300 from a receptacle as shown in FIG. 41, when hook 5425 is removed from recess 5711. Ferrules 5303 provide the Tx, Rx information light signals.

FIG. 38 depicts an exploded view of connector 5300 of FIG. 37. Boot assembly 5445a accepts crimp ring assembly 5440a having protective tube 5440c covering fiber strands and crimp ring 5440b secured to back post 5430c of back body assembly 5430a including back body 5430b. A pair of springs 5425 are placed over a corresponding ferrule assembly 5420 comprising a ferrule and ferrule flange. The ferrule assembly and springs are held within front body 5402 by back body assembly 5430a, as described for connector 2100. Front body 5402 is inserted into distal opening 5401.1 of outer housing 5401 with boot assembly wing 5430a secured within a distal opening 5415b of front body and wing is secured through opening 5401.4 of outer housing securing outer housing, front body and back body together when assembled with push/pull boot, as depicted in FIG. 37.

FIG. 39 depicts connector of FIG. 37 without its outer housing 5301, in an assembled configuration. Boot assembly 5445a is secured on back post 5430c of back body 5430a via crimp ring 5440a, as described in FIG. 38. Wings (5445b, 5445c) secure FIG. 39 assembly within outer housing 5301, and during release of connector 5300 from a receptacle, wings (5445b, 5445c) pull back outer housing a specific distance “d”, which releases adapter/receptacle hook or latch 5625 that is seated in recess 5611 (refer to FIG. 40), while connector 5300 is secured within receptacle 2400. Front body 5402 is secured to connector housing 5401 with back body 5430a secured to a distal end of front body 5402, as described in FIG. 1 and elsewhere in this disclosure.

FIG. 40 depicts connector 5300 secured within receptacle 2400 of FIG. 24. Receptacle hook or latch 5625 rests in connector recess 561.1 formed within front body 5601, at its proximal end. A gap of distance “d” 5629 limits travel of

10

front body 5601 as boot release wing 5645b engages stop face 5301b of outer housing 5601. This “d” travel removes hook 5625 from connector recess 5611 thereby unlatching or releasing connector from adapter 2400. Crimp ring 5440b is shown secured to back post 5630c. Back body 5630a is secured within front body 5402 at distal openings 5401b (FIG. 38).

FIG. 41 depicts connector 5300 being removed or pulled out of receptacle 2400 in direction “P”. Hook or latch 2425 within receptacle housing lifts out of recess 5711 along front body ramp 5401d (FIG. 38), as boot assembly 5745a is being pulled rearward or in a distal direction. Gap 5529 is closed as shown in FIG. 41. Inner face of connector housing 5715c is flush with front face of front body 5701e, which stops travel of boot assembly and is configured to ensure adapter latch or hook 2425 is displaced from recess 5711 to release connector from receptacle, as shown in FIG. 42. Boot wing 5745c is secured at a distal end within second slot or opening 5401.4 within connector housing 5401.

FIG. 42 depicts connector 5300 removed from receptacle 2400 using boot assembly 5845a. In this embodiment, wings (5845b, 5845c) are flush with outer housing wall 5801b. Wings (5845b, 5845c) move within gap or opening 5801c within connector housing outer wall, as boot 5845a is pulled rearward to release connector from adapter 2400 as shown. Spring 5825 biases forward front body face 5815c to be flush with front body face 5801e, when pull force is released from boot assembly. Hook or latch 2425 is displaced from recess 5811, and hook resides in adapter housing gap 2400a within outer housing of receptacle 2400. This reduces the overall dimensions of the adapter to accept more connectors.

Referring to FIG. 43, another embodiment of a polarity change is disclosed using alignment and offset key 9600. Alignment and offset key 9600 is releasably attached to boot clip surface 9975 as shown by the dotted line. Attaching key 9600 to a first side of the boot 9209.1, connector 9100 is in first polarity configuration, and attaching key 9600 to a second side, connector 9100 is in a second polarity configuration. Referring to FIG. 44, a first polarity configuration is assembled key 9600 is attached to boot 9209.1 of connector 9100. Referring to FIG. 45, a second polarity configuration is assembled with key 9600 is attached to the opposite side of boot 9209.1.

In the above detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. Other embodiments may be used, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein.

It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (for example, bodies of the appended claims) are generally intended as “open” terms (for example, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” et cetera). For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and

11

indefinite articles such as “a” or “an” (for example, “a” and/or “an” should be interpreted to mean “at least one” or “one or more”).

The invention claimed is:

1. An optical fiber connector comprising:
 - a front body configured to hold first and second ferrules;
 - a back body having a proximal end portion and a distal end portion spaced apart along a longitudinal axis, the proximal end portion of the back body configured to couple to the front body, the distal end portion of the back body comprising a cylindrical back post having an outer round surface extending along the longitudinal axis, the back body defining a back body passageway extending from the distal end portion through the proximal end portion; and
 - a rotatable boot assembly having a proximal end portion and a distal end portion spaced apart along the longitudinal axis, the rotatable boot assembly comprising a main body and a strain relief sleeve extending longitudinally from the main body to the distal end portion of the rotatable boot assembly, the rotatable boot assembly comprising a boot passageway extending from the distal end portion through the main body, the main body comprising an inner round surface extending along the longitudinal axis, the inner round surface defining a proximal end portion of the boot passageway, the rotatable boot assembly configured to be disposed on the back body such that (i) the outer round surface of the back post is matingly received in the inner round surface of the main body and (ii) the cable boot member is slidable along the longitudinal axis relative to the back body for releasing the optical fiber connector from an adapter, the optical fiber connector being configured to terminate a fiber optic cable such that a jacket of the cable is received in the strain relief sleeve in the boot passageway, the boot passageway and the back body passageway configured to align for passing first and second fibers from the fiber optic cable to the front body to complete a signal path to the first and second ferrules within the front body; the main body further comprising at least one boot hook configured for releasably securing the multi-purpose rotatable boot assembly against rotation relative to the back body, and the rotatable boot assembly further comprising an elongate arm extending longitudinally from the main body in a proximal direction along the longitudinal axis, the elongate arm being configured for selectively setting the optical fiber connector to each of a first polarity and a second polarity.
2. The optical fiber connector according to claim 1, wherein the elongate arm is an alignment key.
3. The optical fiber connector according to claim 2, wherein the alignment key aligns the proximal end of the optical fiber connector into the adapter.
4. The optical fiber connector according to claim 2, wherein the alignment key further comprises an offset key, the offset key stabilizes the distal ends of the fiber optic connector and the second fiber optic connector.
5. An alignment and offset key comprising:
 - a main body with a proximal end closer to a ferrule within fiber optic connectors,
 - and a distal end closer to an incoming fiber optic cable; the proximal end further comprises a protrusion, the protrusion is configured to be accepted into a slot made in an adapter housing for aligning the fiber optic connector upon inserting the fiber optic connector into the adapter;

12

the distal end further comprising an offset key, the offset key has protrusion on one side and forms a gap on the opposing side, and wherein the offset key attached to a fiber optic connector, the protrusion mates with a gap formed by a second offset key attached to a second fiber optic connector, whereby the mating stabilizes the distal end of the fiber optic connector with the second fiber optic when the connectors are secured within the adapter.

6. The optical fiber connector according to claim 1, wherein the at least one boot hook comprises first and second boot hooks.

7. The optical fiber connector according to claim 6, wherein the first and second boot hooks are spaced apart on diametrically opposite sides of the longitudinal axis.

8. The optical fiber connector according to claim 6, wherein when the rotatable boot assembly is disposed on the back body, the first and second boot hooks are spaced apart on diametrically opposite sides of the back body passageway and radially overlap the back body passageway relative to the longitudinal axis.

9. The optical fiber connector according to claim 6, wherein the first and second boot hooks are releasable to allow the rotatable boot assembly to rotate on the fiber optic cable 180° about the longitudinal axis from a first polarity position in which the elongate arm sets the optical fiber connector to the first polarity to a second polarity position in which the elongate arm sets the optical fiber connector to the second polarity.

10. The optical fiber connector according to claim 9, wherein when the rotatable boot assembly is in the first polarity position, the first boot hook is on a first side of the back post and the second boot hook is on a second side of the back post; and wherein when the boot assembly is in the second polarity position, the first boot hook is on the second side of the back post and the second boot hook is on the first side of the back post.

11. The optical fiber connector according to claim 9, wherein the elongate arm is connected to the main body to rotate with the main body as the rotatable boot assembly rotates between the first polarity position and the second polarity position.

12. The optical fiber connector according to claim 6, wherein the first boot hook and the elongate arm are radially spaced apart from the longitudinal axis in a first direction and the second boot hook is radially spaced apart from the longitudinal axis in a second direction opposite the first direction.

13. The optical fiber connector according to claim 1, wherein the boot hook is releasable to allow the rotatable boot assembly to rotate on the fiber optic cable 180° about the longitudinal axis from a first polarity position in which the elongate arm sets the optical fiber connector to the first polarity to a second polarity position in which the elongate arm sets the optical fiber connector to the second polarity.

14. The optical fiber connector according to claim 13, wherein the elongate arm is connected to the main body to rotate with the main body as the rotatable boot assembly rotates between the first polarity position and the second polarity position.

15. The optical fiber connector according to claim 14, wherein the front body holds the first and second ferrules such that the first ferrule is radially spaced apart from the longitudinal axis in a first direction and the second ferrule is radially spaced apart from the longitudinal axis in a second direction opposite the first direction.

13

16. The optical fiber connector according to claim 15, wherein when the rotatable boot assembly is in the first polarity position, the elongate arm is radially spaced apart from the longitudinal axis in the first direction; and wherein when the boot assembly is in the second polarity position, the elongate arm is radially spaced apart from the longitudinal axis in the second direction.

17. The optical fiber connector according to claim 15, wherein the front body comprises a contiguous ferrule support wall extending transverse to the longitudinal axis and having a first end portion radially spaced apart from the longitudinal axis in the first direction and a second end portion radially spaced apart from the longitudinal axis in the second direction, the ferrule support wall defining a first ferrule opening radially spaced between the first end portion and the longitudinal axis and a second ferrule opening radially spaced between the longitudinal axis and the second end portion, the front body configured to receive the first ferrule in the first opening and the second ferrule in the second opening, the front body further comprising a first elongate portion extending longitudinally from the first end portion of the ferrule support wall and a second elongate portion extending longitudinally from the second end portion of the ferrule support wall, the first and second elongate portions having distal end segments that define an undivided space between them that opens longitudinally through a distal end of the front body.

18. The optical fiber connector according to claim 17, wherein the proximal end portion of the back body is

14

configured to be received in the undivided space between the distal end segments of the first and second elongate portions.

19. The optical fiber connector according to claim 1, wherein the back body passageway and the boot passageway form a single, undivided longitudinal passage through which the first and second fibers are passable from the cable to the first and second ferrules.

20. The optical fiber connector according to claim 1, wherein the back body passageway comprises a distal segment along the back post, a proximal segment along the proximal end portion of the back body, and a transition segment between the distal segment and the proximal segment,

wherein the back body passageway has a first inner dimension along a first radial axis and a second inner dimension along a second radial axis perpendicular to the first radial axis,

wherein along the distal segment, the back body passageway is substantially circular such that the first inner dimension is about the same as the second inner dimension;

wherein along the proximal segment, the back body has a cross-sectional shape that is elongate along the first radial axis such that the first inner dimension is greater than the second inner dimension; and

wherein along the transition segment, as the back body passageway extends in the proximal direction along the longitudinal axis, the first inner dimension increases by a greater amount than the second inner dimension.

* * * * *