Insight, Analysis, and Advice on Signal Processing Technology

Introduction to Video Compression

Jeff Bier
Berkeley Design Technology, Inc.

info@BDTI.com
http://www.BDTI.com

© 2005 Berkeley Design Technology, Inc.

Outline

- **Motivation and scope**
- Still-image compression techniques
- Motion estimation and compensation
- Reducing artifacts
- Color conversion
- Conclusions

© 2005 Berkeley Design Technology, Inc. 2

© 2005 Berkeley Design Technology, Inc.

SAMSUNG-1023

Motivation and Scope

- Consumer video products increasingly rely on video compression
  - DVDs, digital TV, personal video recorders, Internet video, multimedia jukeboxes, video-capable cell phones and PDAs, camcorders...
- Video product developers need to understand the operation of video "codecs"
  - To select codecs, processors, software modules
  - To optimize software
- This presentation covers:
  - Operation of video codecs and post-processing
  - Computational and memory demands of key codec and post-processing components

© 2005 Berkeley Design Technology, Inc. 3

Outline

- Motivation and scope
- **Still-image compression techniques**
- Motion estimation and compensation
- Reducing artifacts
- Color conversion
- Conclusions

© 2005 Berkeley Design Technology, Inc. 4

© 2005 Berkeley Design Technology, Inc.

Still-Image Compression

- Still-image compression
  - Still-image techniques provide a basis for video compression
  - Video can be compressed using still-image compression individually on each frame
  - E.g., “Motion JPEG” or MJPEG
- But modern video codecs go well beyond this
  - Start with still-image compression techniques
  - Add motion estimation/compensation
    - Takes advantage of similarities between frames in a video sequence

© 2005 Berkeley Design Technology, Inc. 5

Still-Image Compression

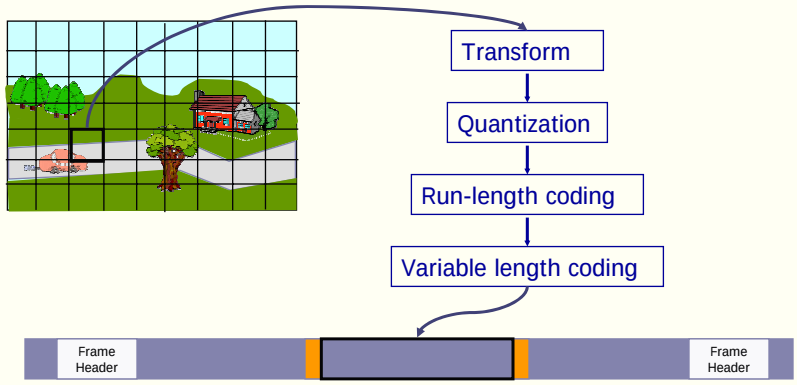

Typical Still-Image Compression Data Flow

© 2005 Berkeley Design Technology, Inc. 6

© 2005 Berkeley Design Technology, Inc.

Block Transform: 8x8 DCT



Y values

- 8x8 DCT blocks applied on Y, U, and V planes individually
- The energy is concentrated in the low frequencies
- Perceptual information also concentrated in low frequencies



8x8 DCT

8x8 IDCT



High energy

Low energy

Spatial domain

Frequency domain

© 2005 Berkeley Design Technology, Inc.

Block Transform: Resource Reqt's

- Compute load:
  - Up to 30% of total video decoder processor cycles
  - MPEG-4 CIF (352x288) @ 30 fps:
    - 71,280 DCTs/s
    - ~40 MHz on a TMS320C55x DSP
    - ~10 MHz if using TMS320C55x DCT accelerator
  - Many implementation and optimization options
    - Can make compute requirements hard to predict
- Memory usage: negligible

© 2005 Berkeley Design Technology, Inc.

© 2005 Berkeley Design Technology, Inc.

Quantization

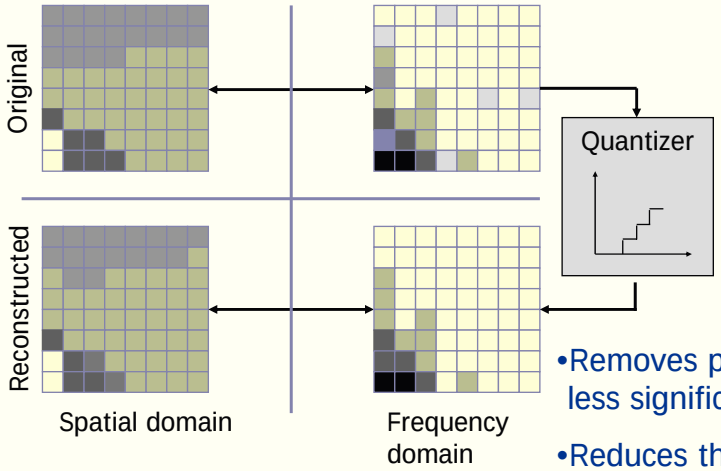

- Removes perceptually less significant data
- Reduces the number of bits per DCT coefficient

© 2005 Berkeley Design Technology, Inc. 9

Quantization: Resource Reqt's

- Quantization (encoder) and dequantization (decoder and encoder) have similar compute loads
- Compute load:
  - From 3% to about 15% of total decoder processor cycles
    - Typically near the lower end of this range
  - MPEG-4 CIF (352x288) @ 30 fps:
    - ~10 MHz on a TMS320C55x DSP (estimated)
- Memory usage: negligible

© 2005 Berkeley Design Technology, Inc. 10

© 2005 Berkeley Design Technology, Inc.

Coding Quantized DCT Coefficients

Goal: Reduce the number of bits required to transmit the quantized coefficients

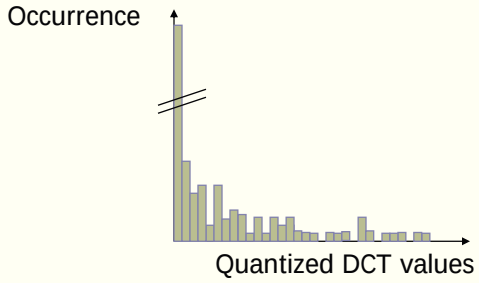

Observation: Unequal distribution of quantized DCT coefficient values

© 2005 Berkeley Design Technology, Inc. 11

Variable Length Coding (VLC/VLD)

- Allocates fewer bits to the most frequent symbols (e.g., using Huffman)
- Integer number of bits per symbol
  - Not the most efficient coding method
  - Arithmetic coding more efficient, but expensive
  - Run-length coding improves efficiency of VLC/VLD for image and video coding

Symbol	Frequency	Code
A	22	1
B	16	011
C	9	0101
D	7	0100
E	4	0011
F	2	0010
…	…	…

© 2005 Berkeley Design Technology, Inc. 12

© 2005 Berkeley Design Technology, Inc.

Run-Length Coding

Encodes value and number of successive occurrences

Takes advantage of the high number of recurring zeros

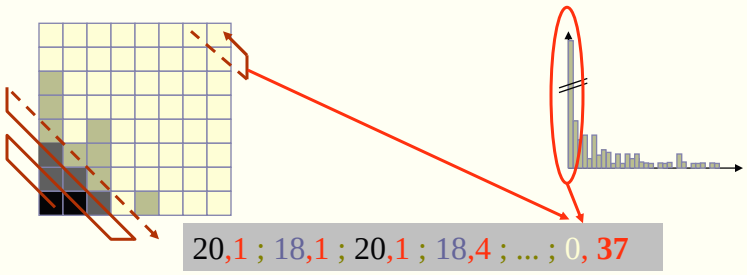

© 2005 Berkeley Design Technology, Inc. 13

Variable Length Coding: Processing Reqt's

- VL decoding much more computationally demanding than VL encoding
- VLD compute load:
  - Up to 25% of total video decoder processor cycles
  - MPEG-4 CIF (352x288) @ 30 fps, 700 kbps:
    - ~15-25 MHz on a TMS320C55x DSP (estimated)
  - About 11 operations per bit on average
- Memory usage
  - A few KB of memory for lookup tables
  - More for speed optimizations

© 2005 Berkeley Design Technology, Inc. 14

© 2005 Berkeley Design Technology, Inc.

Resynchronization Markers

- Without markers, a single bit error in the coded bitstream prevents decoding of the rest of the frame
  - Size of a corrupted variable-length code word is unknown
  - Therefore, the start of the next code word (and all following code words) is unknown
- Resynchronization markers help the decoder recover from bitstream errors
  - Provide a known bit pattern interspersed throughout the bitstream
  - In case of an error, decoder searches for next marker, then continues decoding

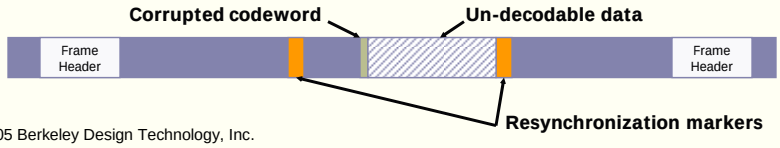

© 2005 Berkeley Design Technology, Inc. 15

Reversible VLC

- Reversible VLC, in conjunction with resynchronization markers, further assists error recovery
  - Code words can be decoded forward and backward
  - In case of error, data can be decoded backward from the next resynchronization marker
  - More data is recovered compared to resynchronization markers alone

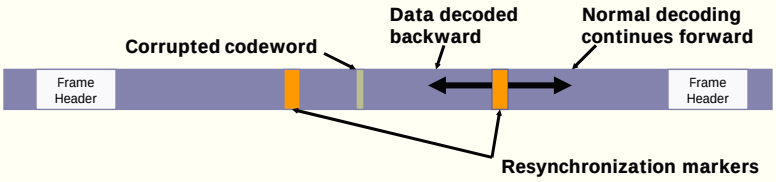

© 2005 Berkeley Design Technology, Inc. 16

© 2005 Berkeley Design Technology, Inc.

AC-DC Prediction

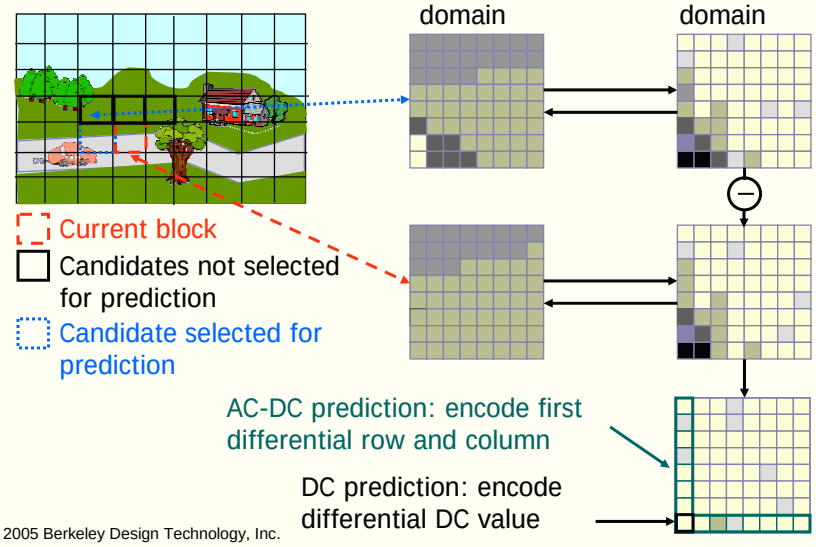

© 2005 Berkeley Design Technology, Inc. 17

AC-DC Prediction

- AC-DC prediction cannot be used in conjunction with motion compensation
  - ⇒ Used mostly for compressing a single image
  - DC prediction used in JPEG
- AC-DC prediction often uses simple filters to predict each coefficient value from one or more adjacent blocks

© 2005 Berkeley Design Technology, Inc. 18

© 2005 Berkeley Design Technology, Inc.

AC-DC Prediction: Processing Reqt's

- Compute load:
  - DC prediction has negligible load
  - AC-DC prediction used in about 8% of frames in typical video
    - Negligible average load (~2% of processor cycles in decoder)
    - Substantial per-frame load (~20-30% of cycles required to decode a frame that uses AC-DC prediction)
- Memory usage:
  - Under 2 KB for CIF (352x288) resolution
    - But more memory (up to 10 KB) can result in faster code
  - May be overlapped with other memory structures not in use during prediction

© 2005 Berkeley Design Technology, Inc. 19

Outline

- Motivation and scope
- Still-image compression techniques
- **Motion estimation and compensation**
- Reducing artifacts
- Color conversion
- Conclusions

© 2005 Berkeley Design Technology, Inc. 20

© 2005 Berkeley Design Technology, Inc.

Motion Estimation and Compensation

- Still image compression ignores the correlation between frames of video
  - JPEG achieves ~10:1 compression ratio
  - Wavelet transform-based image coding reaches compression ratios up to ~30:1
- Adding motion estimation and compensation results in much higher compression ratios
  - Good video quality at compression ratios as high as ~200:1

© 2005 Berkeley Design Technology, Inc. 21

Motion Estimation and Compensation

- Requires at least one "reference frame"
  - Reference frame must be encoded before the current frame
  - But, reference frame can be a future frame in the display sequence
- Three kinds of frames: I, P, and B

- I frame is encoded as a still image and doesn't depend on any reference frame

- P frame depends on previously displayed reference frame

- B frame depends on previous and future reference frames



© 2005 Berkeley Design Technology, Inc. 22

© 2005 Berkeley Design Technology, Inc.

Typical Sequence of I, P, B frames

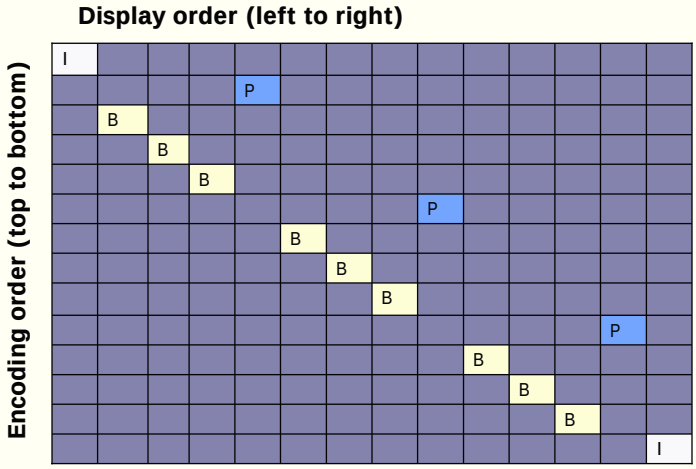

© 2005 Berkeley Design Technology, Inc. 23

Motion Estimation

- Predict the contents of each macroblock based on motion relative to reference frame
  - Search reference frame for a 16x16 region that matches the macroblock
  - Encode motion vectors
  - Encode difference between predicted and actual macroblock pixels

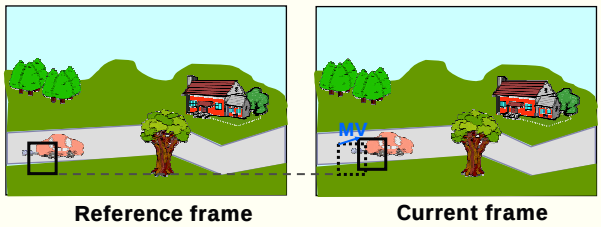

MV= Motion Vector

© 2005 Berkeley Design Technology, Inc. 24

© 2005 Berkeley Design Technology, Inc.

Video Encoder Block Diagram

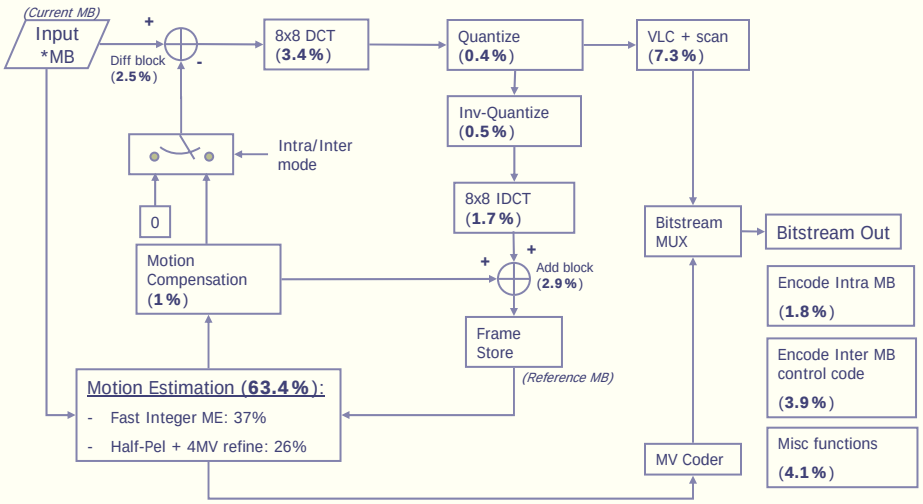

© 2005 Berkeley Design Technology, Inc.

*MB – Macro-Block Source: Motorola SPS

25

Motion Estimation: The Problem

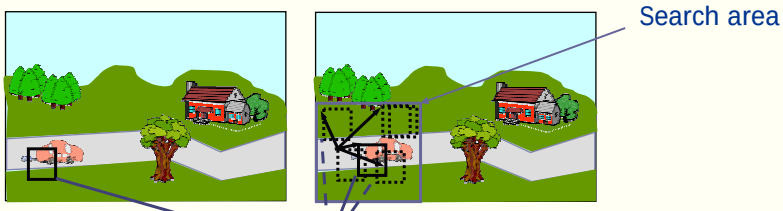

- Search on 16x16 blocks
- Typically on luminance only
- Sub-pixel interpolation required for non-integer motion vectors

or

$\Sigma|Y[i]|^2$ **SSD**

$\Sigma|Y[i]|$ **SAD**

- SAD more often used

© 2005 Berkeley Design Technology, Inc.

26

© 2005 Berkeley Design Technology, Inc.

Motion Estimation: Efficient Motion Vector Search



- Exhaustive search is impractical
- Evaluate only promising candidate motion vectors
  - Don't have to find absolute best match
    - Trade video quality for computational load
- Many methods in use
  - Often proprietary
  - Refine candidate vector selection in stages
  - Predict candidate vectors from surrounding macroblocks and/or previous frames



Motion vector search approach is a key differentiator between video encoder implementations

© 2005 Berkeley Design Technology, Inc. 27

Motion Estimation: Processing Reqt's

- Compute load
  - Most demanding task in video compression
    - Up to 80% of total encoder processor cycles
    - Many search methods exist; requirements vary by method
    - May vary with video program content
    - Makes encoder computational demand several times greater than that of the decoder
    - Dominated by SAD computation
- Memory usage
  - Motion estimation requires reference frame buffers
    - Frame buffers dominate the memory requirements of the encoder
    - E.g., 152,064 bytes per frame @ CIF (352x288) resolution
  - High memory bandwidth required

© 2005 Berkeley Design Technology, Inc. 28

© 2005 Berkeley Design Technology, Inc.

Motion Compensation: Processing Reqt's

- Motion compensation copies pixels from reference frame to predict current macroblock
  - Requires interpolation for non-integer motion vector values
- Compute load
  - Varies with video program content
  - Can require from 5% to 40% of total decoder processor cycles
  - MPEG-4 CIF (352x288) @ 30 fps:
    - Roughly 15-25 MHz on a TMS320C55x DSP (estimated)
- Memory usage
  - Requires reference frame buffers
    - Frame buffers dominate decoder memory requirements
  - Good memory bandwidth is desirable, but less critical compared to motion estimation

© 2005 Berkeley Design Technology, Inc. 29

Outline

- Motivation and scope
- Still-image compression techniques
- Motion estimation and compensation
- **Reducing artifacts**
- Color conversion
- Conclusions

© 2005 Berkeley Design Technology, Inc. 30

© 2005 Berkeley Design Technology, Inc.

Artifacts: Blocking and Ringing

- **Blocking:** Borders of 8x8 blocks visible in reconstructed frame

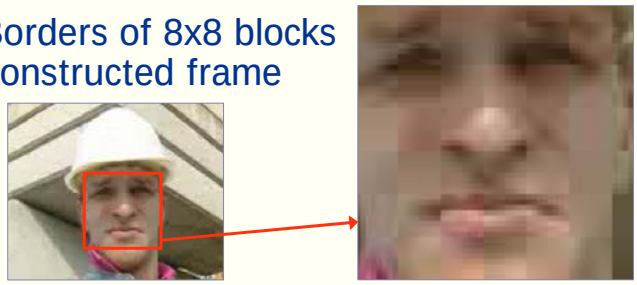

- **Ringing:** Distortions near edges of image features

Original image

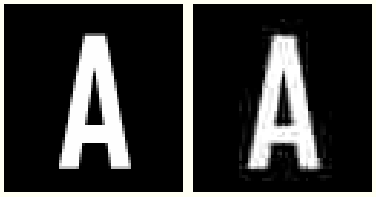

Reconstructed image (with ringing Artifacts)

© 2005 Berkeley Design Technology, Inc. 31

Deblocking and Deringing Filters

Low-pass filters are used to smooth the image where artifacts occur

- **Deblocking:**
  - Low-pass filter the pixels at borders of 8x8 blocks
  - One-dimensional filter applied perpendicular to 8x8 block borders
- **Deringing:**
  - Detect edges of image features
  - Adaptively apply 2D filter to smooth out areas *near* edges
  - Little or no filtering applied to edge pixels in order to avoid blurring

© 2005 Berkeley Design Technology, Inc. 32

© 2005 Berkeley Design Technology, Inc.

Artifact Reduction

Example: Deblocking

Original MPEG Still Frame

Horizontally & Vertically Deblocked Still Frame

© 2005 Berkeley Design Technology, Inc. 33

Artifact Reduction: Post-processing vs. In-loop

- Deblocking/deringing often applied after the decoder (post-processing)
  - Reference frames are not filtered
  - Developers free to select best filters for the application or not filter at all



- Deblocking/deringing can be incorporated in the compression algorithm (in-loop filtering)
  - Reference frames are filtered
  - Same filters must be applied in encoder and decoder
  - Better image quality at very low bit-rates



© 2005 Berkeley Design Technology, Inc. 34

© 2005 Berkeley Design Technology, Inc.

Artifact Reduction: Processing Reqt's

- Deblocking and deringing filters can require more processor cycles than the video decoder
  - Example: MPEG-4 Simple Profile, Level 1 (176x144, 15 fps) decoding requires 14 MIPS on ARM's ARM9E for a relatively complex video sequence
  - With deblocking and deringing added, load increases to 39 MIPS
    - Nearly 3x increase compared to MPEG-4 decoding alone!
- Post-processing may require an additional frame buffer

© 2005 Berkeley Design Technology, Inc. 35

Outline

- Motivation and scope
- Still-image compression techniques
- Motion estimation and compensation
- Reducing artifacts
- **Color conversion**
- Conclusions

© 2005 Berkeley Design Technology, Inc. 36

© 2005 Berkeley Design Technology, Inc.

Color Space Conversion

- Need for color conversion
  - Capture and display video equipment: RGB…
  - …while codecs use YUV
- Computational demand
  - 12 operations per pixel ⇒ 36 million operations/second for CIF (352x288) @ 30 fps
    - About 36 MHz on a TMS320C55x DSP
    - Not including interpolation of chrominance planes
  - Roughly 1/3 to 2/3 as many processor cycles as the video decoder

© 2005 Berkeley Design Technology, Inc. 37

Outline

- Motivation and scope
- Still-image compression techniques
- Motion estimation and compensation
- Reducing artifacts
- Color conversion
- **Conclusions**

© 2005 Berkeley Design Technology, Inc. 38

© 2005 Berkeley Design Technology, Inc.

Conclusions

Understanding the computational and memory requirements of video compression is critical but challenging

- Application design choices are driven by computational and memory requirements
  - Algorithm selection, processor selection, software optimization
  - Video processing often stresses processing resources
- But video applications combine many different signal-processing techniques
  - Transforms, prediction, quantization, entropy coding, image filtering, etc.
- And there is large variation in computational and memory requirements among different applications
  - E.g., digital camcorder has vastly different requirements from a video-enabled cell phone, even when using the same compression standard

© 2005 Berkeley Design Technology, Inc. 39

Conclusions, cont.

- Understanding computational load
  - Computational load of encoder is several times greater than that of decoder due to motion estimation
  - Computational load proportional to frame size and rate for most functions
    - Note: VLD computational load is proportional to bit rate
  - Post-processing steps—deblocking, deringing, color space conversion—add considerably to the computational load
- Computational load can be difficult to predict
  - Many different approaches to motion estimation
  - Computational load of some tasks can fluctuate wildly depending on video program content
    - E.g., motion compensation

© 2005 Berkeley Design Technology, Inc. 40

© 2005 Berkeley Design Technology, Inc.

Conclusions, cont.

- Understanding memory requirements:
  - Memory requirements dominated by frame buffers
    - A decoder that supports only I and P frames requires two frame buffers (current and reference)
    - A decoder that supports I, P, and B frames requires three buffers (current and two reference)
    - Deblocking/deringing/color conversion may require an additional buffer
  - Program memory, tables, other data comprise a non-negligible portion of memory use
    - But this portion is still several times smaller than frame buffers
- High memory use often necessitates off-chip memory
  - Off-chip memory bandwidth can be a performance bottleneck

© 2005 Berkeley Design Technology, Inc. 41

Conclusions, cont.

- Video compression used in many products
  - DVDs, digital TV, personal video recorders, Internet video, multimedia jukeboxes, video-capable cell phones and PDAs, camcorders...
- Different products have different needs
  - Wide range of frame sizes and rates, video quality, bit rates, post-processing options, etc.
  - Result in wide range of computational and memory requirements
- Need to understand the operation of video codecs
  - To understand computational and memory requirements
  - To select codecs, processors, software modules
  - To optimize software

© 2005 Berkeley Design Technology, Inc. 42

© 2005 Berkeley Design Technology, Inc.

For More Information…
www.BDTI.com

Inside [DSP] newsletter and quarterly reports

Benchmark scores for dozens of processors

Pocket Guide to Processors for DSP

- Basic stats on over 40 processors

Articles, white papers, and presentation slides

- Processor architectures and performance
- Signal processing applications
- Signal processing software optimization

comp.dsp FAQ

2004 Edition

© 2005 Berkeley Design Technology, Inc.

43

© 2005 Berkeley Design Technology, Inc.