


English Speech
Enaid

Journal of Speech and Hearing

RESEARCH

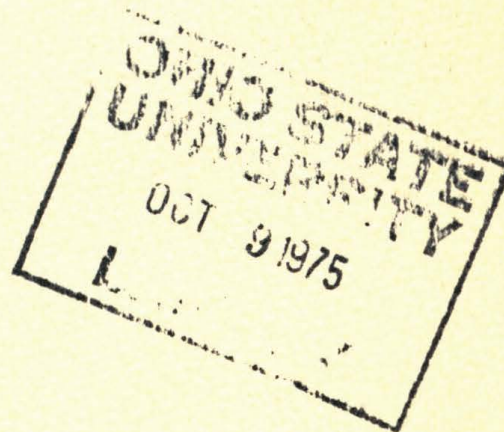

Articles

- Vowel and Nasal Duration as Cues to Voicing in Word-Final
Stop Consonants: Spectrographic and Perceptual Studies—
Lawrence J. Raphael, M. F. Dorman, Frances Freeman 389
- The Relationship between Discrimination and Articulation
Training in Children with Misarticulations—*Gail C. Williams,
Leija V. McReynolds* 401
- Intelligibility Characteristics of Superior Esophageal
Speech Presented under Various Levels of Masking Noise—
Yoshiyuki Horii, Bernd Weinberg 413
- Averaged Evoked Potentials in Cats with Lesions of
Auditory Pathway—*Robert A. Goldenberg, Arthur J. Derbyshire* 420
- Effect of Selected Word Attributes on Preschoolers' Speech
Disfluency: Initial Phoneme and Length—*Ellen-Marie Silverman* 430
- Static and Dynamic Acoustic Impedance Measurements in Infant
Ears—*Robert H. Margolis, Gerald R. Popelka* 435
- Dimensions of Consonant Perception in Normal and Hearing-
Impaired Listeners—*Brian E. Walden, Allen A. Montgomery* 444
- Brain Stem Auditory-Evoked Responses in Premature Infants—
Carol Schulman-Galambos, Robert Galambos 456
- Self-Retrieval and Articulatory Retention—
Harris Winitz, Betty Bellerose 466
- Punishment and Negative Reinforcement of Stuttering Using
Electric Shock—*Richard Martin, Kenneth St. Louis, Samuel
Haroldson, Jon Hasbrouck* 478
- Practicality of Shortening the Porch Index of Communicative
Ability—*Frank G. DiSimoni, Robert L. Keith, Dennis L.
Holt, Frederic L. Darley* 491
- Most Comfortable Loudness for Pure Tones and Speech in
the Presence of Masking Noise—*Alan M. Richards* 498

A Reconceptualization and Revised Scoring Procedure for the ITPA Based on Multivariate Analysis of the Original Normative Data— <i>Gary Cronkhite, Kandace Penner</i>	506
*Children's Acquisition of Idioms in the English Language— <i>Donna Nemeth Lodge, Edwin A. Leach</i>	521
Observer Agreement for Marking Moments of Stuttering— <i>Martin A. Young</i>	530
Development of the Voicing Contrast: Perception of Stop Consonants— <i>Marsha A. Zlatin, Roy A. Koenigsknecht</i>	541
*Tympanometric Curves and Otosclerosis— <i>Robert G. Ivey</i>	554
Verbal Coding Strategies Used by Hearing-Impaired Individuals— <i>Robert D. Moulton, Daniel S. Beasley</i>	559
The Measurement of Critical Masking Bands— <i>Robert H. Margolis, Arnold M. Small</i>	571
 Research Notes	
Lingual-Palatal Pressure Measurement and Analysis Techniques— <i>Herbert A. Leeper, Jr., Franklin J. Appl</i>	588
A Miniature Accelerometer for Detecting Glottal Waveforms and Nasalization— <i>K. N. Stevens,</i> <i>K. N. Kalikow, T. R. Willemain</i>	594
 Letters to the Editor	
Comment on "Stuttering Frequency and the Onset of Phonation"— <i>Martin A. Young</i>	600
A Reply to Martin Young— <i>Martin R. Adams, Ron Reis</i>	603
ERRATA	606

*Edited by Robert C. Bilger, Ph.D., who served as JSHR Editor, 1971-1974.

A MINIATURE ACCELEROMETER FOR DETECTING GLOTTAL WAVEFORMS AND NASALIZATION

K. N. STEVENS

Massachusetts Institute of Technology, Cambridge, Massachusetts

D. N. KALIKOW

Bolt, Beranek and Newman, Inc., Cambridge, Massachusetts

T. R. WILLEMAIN

Massachusetts Institute of Technology, Cambridge, Massachusetts

A lightweight accelerometer has been used to obtain a waveform related to the glottal acoustic output when attached to the neck of a speaker, and to provide an indication of acoustic coupling to the nasal cavities when attached to the external surface of the nose. Examples of signals produced by the accelerometer are shown, and possible clinical applications are discussed.

This paper describes the use of a lightweight transducer to produce a waveform representative of the glottal acoustic output when attached to the throat of a speaker, and to provide a measure of the degree of acoustic coupling to the nasal cavities through the velopharyngeal opening when attached to the external surface of the nose.

The transducer is a miniature accelerometer (Bolt, Beranek, and Newman Model 501). It is housed in a cylindrical casing of height 0.33 inch and diameter 0.31 inch, and its total weight is 1.8 grams. The casing contains both a piezoelectric transducer and a preamplifier circuit. Figure 1 shows the accelerometer attached to the neck and to the nose, and illustrates the small size of the device. Nominal sensitivity of the unit is 8 mv/g. The frequency response is flat to within 5% over the range of 8 to 20,000 Hz. The accelerometer can withstand shocks of 10,000 g's without damage. The preamplifier requires 1 ma of current at 9 vDC. These features of light weight, good sensitivity, wide band width, ruggedness, and low power consumption make the device suitable in applications where speech-related signals need to be extracted and displayed, such as speech-reception aids for the deaf, speech training of the deaf or of patients with velopharyngeal incompetence, training of pronunciation of a second language, or even speech pick-up in high-intensity noise en-

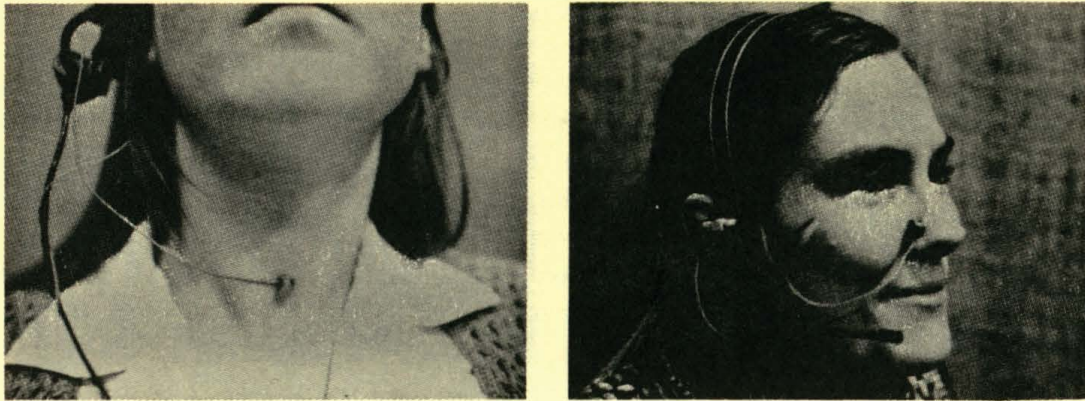


FIGURE 1. Pictures showing the accelerometer in position for detection of glottal and nasal signals.

vironments, since the accelerometer is relatively insensitive to airborne sound.

The accelerometer may be easily attached to the neck or nose of a speaker by means of double-sided adhesive tape. Once in place, the accelerometer is barely perceived by subjects. They can wear it for hours without discomfort.

GLOTTAL WAVEFORM

One application of a neck-attached accelerometer is to obtain a waveform from which glottal periodicity or fundamental frequency can be conveniently extracted. Derivation of fundamental frequency is more complex with the signal derived from a microphone mounted near the mouth, since this signal has a richer harmonic structure and may include interference from background noise. While real-time pitch extraction can be achieved from voice signals alone, a procedure based on neck-derived signals is simpler and more reliable. The waveform from the accelerometer is also potentially useful in basic studies of speech production and perhaps in diagnosis of abnormalities of the larynx or in the subglottal airways (since an acoustic resonance of the subglottal system can be observed in the waveform, as noted below). Other kinds of neck-attached sensors have been used for the purpose of obtaining a harmonic-free glottal waveform, but in general these have been less convenient and more bulky than the accelerometer described here (Sugimoto and Hiki, 1960; Porter, 1963; Tjernlund, 1964; Fourcin and Abberton, 1971).

Figure 2 shows the simultaneous throat accelerometer and microphone waveforms of a male speaker uttering several vowels. The voice signal was recorded using an Electro-Voice RE 15 microphone at a distance of 12 inches in front of the subject's lips. The accelerometer provides a waveform with relatively little harmonic content and fairly uniform amplitude. For these utterances, the accelerometer was mounted in the midline between the thyroid cartilage and the sternal notch. The time lag between the accelerometer waveform and the output of the voice microphone is about 1.5 msec, approximately the time needed for sound to propagate from the glottis to the

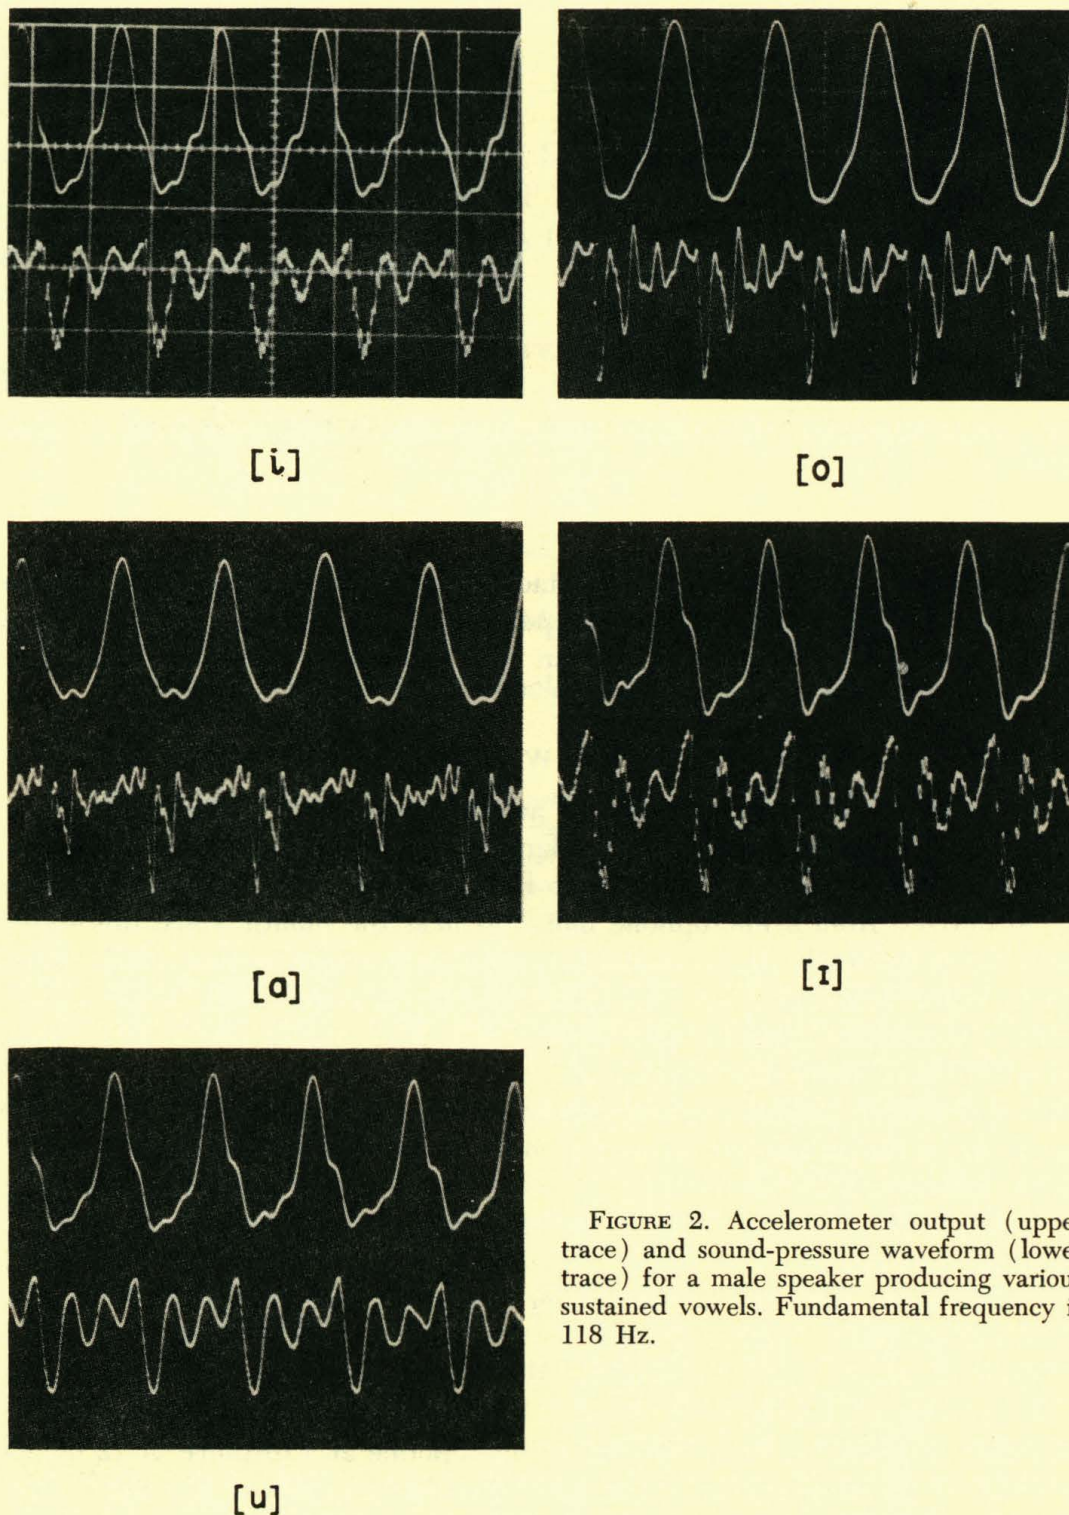


FIGURE 2. Accelerometer output (upper trace) and sound-pressure waveform (lower trace) for a male speaker producing various sustained vowels. Fundamental frequency is 118 Hz.

microphone. The ripple visible on the accelerometer output has a frequency of about 500 Hz, irrespective of vowel; its amplitude depends somewhat on the vowel. Observations of waveforms recorded from other speakers confirm the presence of a similar ripple whose frequency is vowel-independent but

speaker-dependent, the frequency of the ripple for females being higher than that for males. This ripple is presumably the result of acoustic excitation of a natural frequency of the subglottal system in the vicinity of 500 Hz (Fant et al., 1972; Henke, 1974). It is apparent from Figure 2 that the accelerometer gives a peaked waveform that can be used with simple signal processing techniques to provide an indication of glottal periodicity.

Experiments were performed to determine the amplitude of the accelerometer output and the amount of harmonic content as a function of the mounting position on the neck. The results indicate that a point midway between the thyroid cartilage and the sternal notch and in the midline gives waveforms with maximal amplitude and minimal harmonic content. With the accelerometer in this location, there is little variation in waveform from one vowel to another. The exact positioning of the accelerometer in the vicinity of this point is not critical.

The neck-attached accelerometer, together with frequency-measuring and interfacing circuitry, is currently being used in a computer-based system of speech-training aids for deaf children (Nickerson and Stevens, 1973), and in a similar system for the training of pronunciation of a second language (Kalikow and Swets, 1972). The pitch extractor operates reliably over a range of subjects including adult males, adult females, normal-speaking children, and deaf children.

NASALIZATION DETECTION

When, during voiced speech (that is, during portions of utterances produced with the vocal folds vibrating), the speaker lowers his velum, acoustic energy emanating from the glottis is modified by both the mouth and nasal cavities. The effects of the nasal cavities on the characteristics of the acoustic speech wave as transduced by a microphone are subtle, whereas the signal at the nose provides a more direct indication of a lowered velum. The acoustic energy propagated through the velopharyngeal opening into the nasal cavities is signaled unequivocally by an increase in the vibration of the skin of the nostril.

To provide an instantaneous indication of this correlate of velopharyngeal opening, the output of the accelerometer attached to the nose (Holbrook and Crawford, 1970) is filtered, rectified, and smoothed with an averaging time of about 20 msec. With the aid of a computer, this smoothed signal is sampled at 10-msec intervals, log-converted, and displayed on an oscilloscope.

The degree to which a display of this type can indicate differences between nasal and nonnasal speech sounds is illustrated in Figure 3. This figure shows the display of the nasal accelerometer output for three phrases produced by a normal adult male speaker: one phrase (*his father*) contains no nasal consonants, another (*his mother*) contains one nasal, and a third (*my money*) contains several nasal consonants. Quantitative measurements have shown that the output for nasal sounds is 10-20 dB above that for nonnasal vowels

(Stevens et al., 1974). The difference is greatest for nonnasal, nonhigh vowels, and is as small as 10 dB only for the nonnasal vowel /i/. The curves clearly show the regions of the speech in which there is a velopharyngeal opening and demonstrate the well-known fact that the nasalization for a nasal consonant extends into vowels adjacent to the consonant.

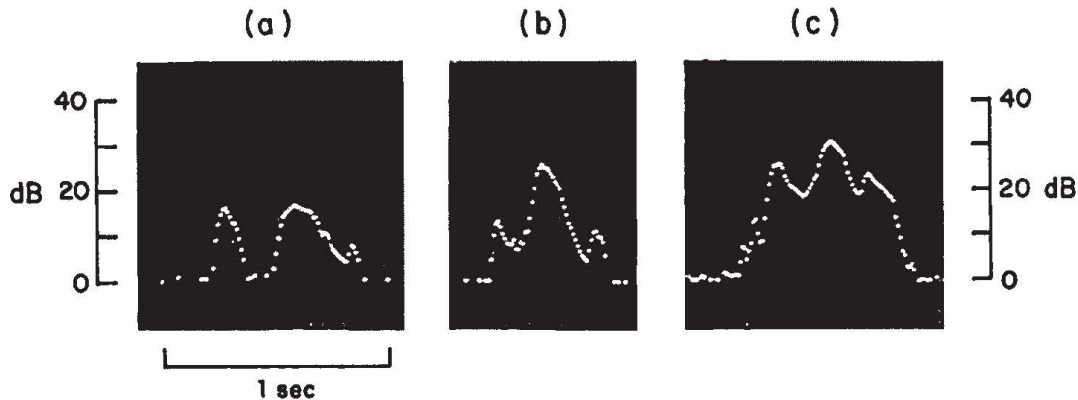


FIGURE 3. Computer-derived and -displayed "nasalization function" for three phrases produced by a normal male speaker: (1) *his father*, (2) *his mother*, and (3) *my money*.

A display of the type shown in Figure 3 can be used, therefore, to indicate presence or absence of nasalization in speech sounds, whereby nasalization we mean the presence of a velopharyngeal opening sufficient to cause substantial acoustic coupling between the oropharyngeal and nasal cavities. The question of how a measure obtained from this display correlates with subjective judgments of nasality remains to be answered. This question is discussed in more detail elsewhere (Stevens et al., 1974).

Figure 4 shows the nasalization display for a deaf child with severe problems in controlling the velum; for comparison, the display is also shown for a normal speaker producing the same sentence. The sentence for the deaf child is longer than for the normal speaker. Some vowels show too much nasalization

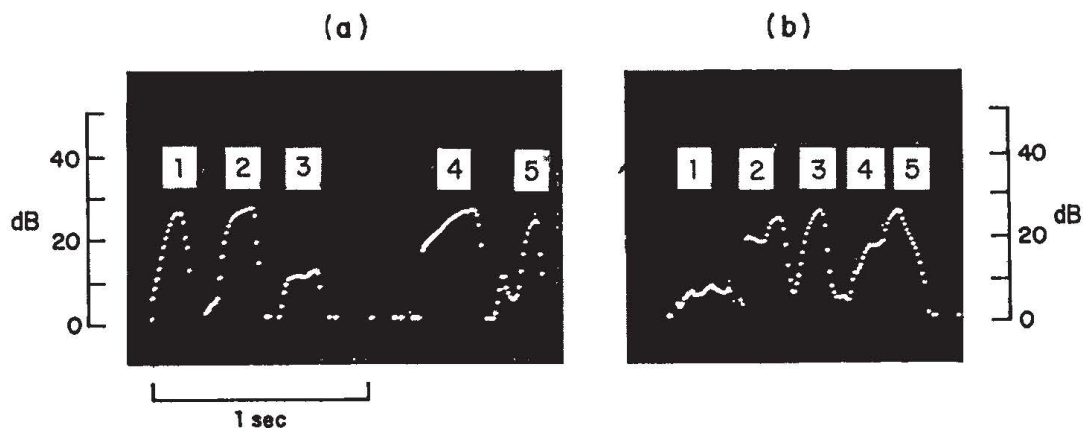


FIGURE 4. Nasalization display for the sentence, "You can drink your milk," produced by: (1) a deaf child with problems of velar control and (2) a normal adult male speaker. The five syllables in the sentence are indicated above each version.

(the vowels in *you* and *your*), and some nasal consonants are replaced by stops (the nasal consonants in *drink* and *milk*).

This type of nasalization display has been incorporated in the above-mentioned system of speech-training aids for deaf children. Provision has been made for setting a nasalization threshold on the display under the control of a clinician, to provide a target for the student. The student attempts to maintain the contour below this threshold during a nonnasal utterance or during the nonnasal portion of an utterance. The system also permits the clinician's nasalization trace to be stored on one part of the display, to allow visual comparison of the utterances of student and clinician. The display is proving to be successful in indicating to a deaf student when his velopharyngeal port is closed. Training procedures are being devised and experiments are in progress to determine how a display of the type shown in Figures 3 and 4 can be most effectively used for speech training with deaf children who have inadequate control of the velum but who presumably have an intact neuromuscular system for manipulating the velum.

ACKNOWLEDGMENT

This work was supported by the U.S. Office of Education, Media Services and Captioned Films Branch of the Bureau of Education for the Handicapped, under Contract No. OEC-0-71-4670(615), and the Advanced Research Projects Agency under AFOSR Contract No. F44620-71-C-0065. Programming and other advice and assistance were provided by D. Dodds, R. S. Nickerson, and Ann Rollins. Requests for reprints should be sent to Daniel N. Kalikow, Bolt, Beranek and Newman, Inc., 50 Moulton Street, Cambridge, Massachusetts 02138.

REFERENCES

- FANT, G., ISHIZAKA, K., LINDQUIST, J., and SUNDBERG, J., Subglottal formants. *Quart. Progr. stat. Rep.*, Speech Trans. Lab., Royal Inst. Technol., Stockholm, No. 1, 1-12 (1972).
- FOURCIN, A. J., and ABBERTON, E., First applications of a new laryngograph. *Med. Biol. Ill.*, 21, 172-182 (1971).
- HENKE, W., Display and interpretation of glottal activity as transduced by external accelerometers. *J. acoust. Soc. Amer. Suppl.*, 55 (1974).
- HOLBROOK, A., and CRAWFORD, G., Modification of speech behavior in the speech of the deaf- (hypernasality). Paper presented at the Conference of Executives of American Schools for the Deaf, St. Augustine, Florida (April 1970).
- KALIKOW, D., and SWETS, J., Experiments with computer-controlled displays in second-language learning. *IEEE Trans. Aud. Electroacoustics*, AU-20, 23-28 (1972).
- NICKERSON, R., and STEVENS, K., Teaching speech to the deaf: Can a computer help? *IEEE Trans. Aud. Electroacoustics*, AU-21, 445-455 (1973).
- PORTER, H., Extraction of pitch from the trachea. Air Force Cambridge Research Laboratories Research Note, AFCRL-63-24 (Feb. 1963).
- STEVENS, K., NICKERSON, R., BOOTHROYD, A., and ROLLINS, A., Assessment of nasality in the speech of deaf children. Report No. 2902, Bolt, Beranek, and Newman, Inc., September 1974.
- SUGIMOTO, T., and HIKI, S., Extraction of the pitch of a voice from the vibration of the outer skin of the trachea. *J. acoust. Soc. Japan*, 16, 291-293 (1960).
- TJERNLUND, P., A pitch extractor with larynx pickup. *Quart. Progr. stat. Rep.*, Speech Trans. Lab., Royal Inst. Technol., Stockholm, No. 3, 32-34 (Oct. 1964).

Received November 6, 1973.

Accepted October 15, 1974.