

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 April 2010 (15.04.2010)

PCT

(10) International Publication Number
WO 2010/040256 A1


- (51) **International Patent Classification:**
G02B 6/28 (2006.01) **G02B 6/40** (2006.01)
- (21) **International Application Number:**
PCT/CN2008/072625
- (22) **International Filing Date:**
9 October 2008 (09.10.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicants (for all designated States except US):** **CORN-ING CABLE SYSTEMS LLC** [US/US]; Hi-Le, PO Box 489, Hickory, North Carolina 28603-0489 (US). **CORN-ING CABLE SYSTEMS (SHANGHAI) CO., LTD** [CN/CN]; 3f, Liming Building No. 111, Gui Qing Road, Shanghai 200233 (CN).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **CASTONGUAY, Guy** [CA/CN]; Room 3701, No.15 Lane 2, West Wei Fang Road, Shanghai 200122 (CN). **CAO, Songhua** [CN/CN]; Room 401, No.131, Lane 388, Gudai Road, Shanghai 200233 (CN). **DAI, Bin** [CN/CN]; Room 201, No.5, Lane 555, Denghui Road, Shanghai 200233 (CN).
- (74) **Agent:** **SHANGHAI PATENT & TRADEMARK LAW OFFICE, LLC**; 435 Guiping Road, Xuhui, Shanghai 200233 (CN).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** FIBER OPTIC TERMINAL HAVING ADAPTER PANEL SUPPORTING BOTH INPUT AND OUTPUT FIBERS FROM AN OPTICAL SPLITTER

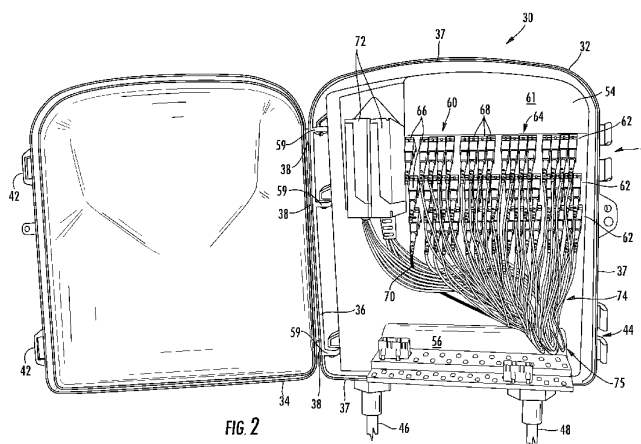

(57) **Abstract:** A fiber optic terminal (30) is configured to optically connect optical fibers from received network-side and subscriber-side fiber(s) to facilitate providing direct or intermediate optical connections between a fiber optic network and a destination. The fiber optic terminal (30) includes at least one adapter module (60) comprising at least one adapter panel (62). The adapter panel (62) is configured to receive both an input fiber (70) and one or more of a plurality of output fibers (74) from an optical splitter (72). To establish optical connections between the network-side and subscriber-side fiber(s), the input fiber (70) from the optical splitter (72) is optically connected to an input fiber optic adapter (66) on the adapter panel (62), which is optically connected to the at least one network-side fiber (76). One or more of the plurality of output fibers (74) from the optical splitter (72) are optically connected to one or more output fiber optic adapters (68) on the adapter panel (62), which are optically connected to the subscriber-side fibers(86).

WO 2010/040256 A1

FIBER OPTIC TERMINAL HAVING ADAPTER PANEL SUPPORTING BOTH INPUT AND OUTPUT FIBERS FROM AN OPTICAL SPLITTER

BACKGROUND

Technical Field

[0001] The field of the disclosure relates to fiber optic terminals. The fiber optic terminals can include, but are not limited to local convergence points (LCPs) and fiber distribution terminals (FDTs).

Technical Background

[0002] To provide improved performance to subscribers, communication and data networks are increasingly employing optical fiber. The benefits of optical fiber are well known and include higher signal-to-noise ratios and increased bandwidth. To further improve performance, fiber optic networks are increasingly providing optical fiber connectivity all the way to end subscribers. These initiatives include various fiber-to-the-premises (FTTP), fiber-to-the-home (FTTH), and other fiber initiatives (generally described as FTTx). In this regard, **FIG. 1** illustrates an exemplary fiber optic network **10**. The fiber optic network **10** provides optical signals from switching points **12** over a distribution network **13** comprised of fiber optic feeder cables **14**. The optical signals may be carried over the fiber optic feeder cables **14** to local convergence points (LCPs) **16**. The LCPs **16** act as consolidation points for splicing, making cross-connections and interconnections, as well as providing locations for couplers and splitters. Fiber optic cables **18**, such as distribution cables, exit the LCPs **16** to carry optical signals between the fiber optic network **10** and a subscriber's premises **20**. Typical subscriber premises **20** include single-dwelling units (SDU), multi-dwelling units (MDU), businesses, and/or other facilities or buildings.

[0003] Because LCPs **16** are typically configured to service multiple premises **20**, the fiber optic cables **18** leaving the LCPs **16** are typically run to one or more intermediate fiber distribution terminals (FDTs) **22**. FDTs **22** facilitate FTTx applications by providing network access points to the fiber optic network **10** to groupings of subscribers' premises **20**. Optical interconnections to the subscribers' premises **20** are typically provided via indoor/outdoor drop cables **24** that are optically interconnected with the fiber optic cables **18** within the FDTs **22**. The FDTs **22** also provide a consolidated location for technicians or other installation personnel to make

and protect splices between the drop cables **24** and the fiber optic cables **18** as opposed to making splices in sporadic locations.

[0004] In either case of LCPs or FDTs, size of the terminal can be a factor. Size is particularly a factor for MDU applications, where available real estate for locating LCPs and/or FDTs may be limited. LCPs and FDTs must be sized to handle the number of subscribers to be serviced. This presents particular challenges for providing high-density LCPs and FDTs that have enough internal space available to include necessary optical interconnection components. For example, if an LCP provides three (3) 1x32 splitters for handling up to ninety-six (96) subscribers, space must be provided in the LCP for three (3) network-side ports, three (3) splitters, fusion or mechanical splices, and ninety-six (96) subscriber-side connections/connectors, as well as any other components required. Similarly, if an FDT is configured to provide access to forty-eight (48) subscribers, space must be provided in the FDT for forty-eight (48) subscriber-side connections/connectors, as well as any other components required. Further, routing guides must also be provided for routing network-side and subscriber-side fibers without damaging the optical fibers.

[0005] Even after optical connections are made, the LCPs and FDTs should be flexible enough to allow for removing and adding new subscribers. When adding new subscribers, additional subscriber-side connections may need to be established within an LCP and/or FDT. This can be particularly challenging in high density LCPs and FDTs, because adding new connections may special handling that can risk damaging fibers for established connections or require reconfiguring established connections to access new connections thereby disrupting service to established connections. This is because new connections and related areas may be difficult to access with existing high density optical connections established in a terminal.

SUMMARY OF THE DETAILED DESCRIPTION

[0006] Embodiments disclosed in the detailed description include fiber optic terminals configured to optically connect a received network-side fiber to one or more of a plurality of received subscriber-side fibers. In this regard, the fiber optic terminal includes at least one adapter module comprising at least one adapter panel. The adapter panel is configured to receive both an input fiber and one or more of a plurality of output fibers from an optical splitter. To establish optical connections

between the network-side fiber and one or more of the subscriber-side fibers, the input fiber from the optical splitter is optically connected to an input fiber optic adapter on the adapter panel. The input fiber optic adapter is configured to be optically connected to the network-side fiber. One or more of the plurality of output fibers from the optical splitter are optically connected to one or more output fiber optic adapters on the adapter panel. The output fiber optic adapters are configured to be optically connected to one or more of the subscriber-side fibers. In this manner, optical connections between the network-side fiber and one or more of the plurality of subscriber-side fibers can be made and accessed through a common adapter panel in the fiber optic terminal. The fiber optic terminals can be employed to facilitate providing direct or intermediate optical connections between a fiber optic network and end subscribers.

[0007] The fiber optic terminals disclosed herein may be used for any type of fiber optic terminal, including but not limited to local convergence points (LCPs) and fiber distribution terminals (FDTs). The fiber optic terminals disclosed herein may be used for any fiber optic distribution application, including but not limited to directly or intermediately routing fiber optic cables and optical fibers from a fiber optic network(s) to end subscribers. This includes, but is not limited to various fiber-to-the-premises (FTTP), fiber-to-the-home (FTTH), and other fiber initiatives (generally described as FTTx). Subscriber premises include, but are not limited to single-dwelling units (SDU), multi-dwelling units (MDU), businesses, and/or other facilities or buildings.

[0008] Additional features and advantages of the invention will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the invention as described herein, including the detailed description that follows, the claims, as well as the appended drawings.

[0009] It is to be understood that both the foregoing general description and the following detailed description of embodiments of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated into and constitute a part of this specification. The drawings illustrate various embodiments of the invention,

and together with the description serve to explain the principles and operation of the invention.

BRIEF DESCRIPTION OF THE FIGURES

[0010] **FIG. 1** is a schematic illustration of an exemplary fiber optic network which includes fiber optic terminals for carrying optical signals over the fiber optic network;

[0011] **FIG. 2** is an exemplary fiber optic terminal with established optical fiber connections according to one embodiment;

[0012] **FIG. 3** illustrates the fiber optic terminal of **FIG. 2** with a cover closed on a base of the fiber optic terminal;

[0013] **FIG. 4** illustrates the fiber optic terminal of **FIG. 2** with a transition panel opened with a lower fiber management area of the fiber optic terminal exposed;

[0014] **FIG. 5** is a side cross-sectional view of the fiber optic terminal of **FIG. 2**;

[0015] **FIG. 6** illustrates an alternative embodiment of a transition panel for the fiber optic terminal of **FIG. 2** providing an optical fiber parking area;

[0016] **FIG. 7** illustrates another alternative embodiment of a transition panel for the fiber optic terminal of **FIG. 2** having one or more optical fiber splitters located on the rear side of the transition panel; and

[0017] **FIG. 8** illustrates a side view of an exemplary multi-dwelling unit (MDU) that includes fiber optic terminals according to the embodiments described herein, including local convergence points (LCPs) and exemplary fiber distribution terminals (FDTs) for providing optical fiber connectivity to end subscribers.

DETAILED DESCRIPTION

[0018] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Whenever possible, like reference numbers will be used to refer to like components or parts.

[0019] Embodiments disclosed in the detailed description include fiber optic terminals configured to optically connect a received network-side fiber to one or more of a plurality of received subscriber-side fibers. In this regard, the fiber optic terminal includes at least one adapter module comprising at least one adapter panel. The adapter panel is configured to receive both an input fiber and one or more of a plurality of output fibers from an optical splitter. To establish optical connections

between the network-side fiber and one or more of the subscriber-side fibers, the input fiber from the optical splitter is optically connected to an input fiber optic adapter on the adapter panel. The input fiber optic adapter is configured to be optically connected to the network-side fiber. One or more of the plurality of output fibers from the optical splitter are optically connected to one or more output fiber optic adapters on the adapter panel. The output fiber optic adapters are configured to be optically connected to one or more of the subscriber-side fibers. In this manner, optical connections between the network-side fiber and one or more of the plurality of subscriber-side fibers can be made and accessed through a common adapter panel in the fiber optic terminal. The fiber optic terminals can be employed to facilitate providing direct or intermediate optical connections between a fiber optic network and end subscribers.

[0020] The fiber optic terminals disclosed herein may be used for any type of fiber optic terminal, including but not limited to local convergence points (LCPs) and fiber distribution terminals (FDTs). For example, if the fiber optic terminal is configured as a local convergence point (LCP), the network-side or upstream cable may be a feeder cable from a central office or switching point. The subscriber-side or downstream cable may be a distribution cable. If the fiber optic terminal is configured as a fiber distribution terminal (FDT), the network-side or upstream cable may be a distribution cable, and a subscriber-side or downstream cable may be a drop cable. The drop cable may then be routed to an end subscriber(s) for FTTx applications.

[0021] Referring to **FIG. 2**, a fiber optic terminal **30** constructed in accordance with one embodiment of the invention is shown. The fiber optic terminal **30** provides a convenient access point in a telecommunications or data network for a field technician to install and reconfigure optical fiber connections between network-side and subscriber-side fiber optic cables. The fiber optic terminal **30** is configured to allow one or more optical fibers provided in one or more network-side or upstream fiber cables to be easily and readily interconnected with one or more optical fibers in one or more subscriber-side or downstream fiber cables. By the term “subscriber-side,” it is meant that optical fiber, fiber optic cable, or optical connection, as the case may be, is provided anywhere between the end subscriber and the fiber optic terminal **30**. A subscriber-side fiber cable, optical fiber, or optical connection may be provided directly to an end subscriber or may be provided to one or more intermediate optical

terminals or components before reaching an end subscriber. By the term “network-side,” it is meant that the optical fiber, fiber optic cable, or optical connection, as the case may be, is provided between a fiber optic network, central switching point, central office, or the like and the fiber optic terminal **30**.

[0022] The fiber optic terminal **30** illustrated in **FIG. 2** comprises a base **32** and a cover **34** hingedly affixed to the base **32** and opened thereon. The base **32** and cover **34** may be made of a rigid material, such as aluminum, plastic, or thermoplastic, such that the internal components of the fiber optic terminal **30** can be protected when the cover **34** is closed on the base **32**, as illustrated in **FIG. 3**. Turning back to **FIG. 2**, the cover **34** is generally rectangular and is hingedly affixed to the base **32** of similar form along the upper edge of a left side wall **36** at one or more hinge locations **38**. The base **32** is comprised of three other side walls **37** that are either attached or interconnected to each other and the left side wall **36** to form an interior cavity **40** within the base **32** (see **FIG. 4**). The interior cavity **40** provides room for routing the network-side and subscriber-side cables and the optical fibers therein and making optical interconnections between the two, including through any intermediate optical components that may be provided in the fiber optic terminal **30**, such as splice trays, coupler trays, and adapters as examples, as well be described in more detail below.

[0023] A technician opens the cover **34** to access the interior cavity **40** to install or reconfigure optical interconnections within the fiber optic terminal **30**. After completion, the cover **34** can be closed against the base **32** to close the fiber optic terminal **30**. The cover **34** and the base **32** contain one or more clasps **42**, **44** that interlock with each other when the cover **34** is closed on the base **32** as a means of securing the cover **34** to the base **32**. When the cover **34** is closed, the optical interconnections and components contained inside the fiber optic terminal **30** are protected from the environment. When closed, the fiber optic terminal **30** has the approximate dimensions of 14.95 inches length (“L”), 14.60 inches width (“W”), and 5.65 inches height (“H”) (see **FIGS. 3 and 5**). However, any dimensions desired are possible.

[0024] As will be discussed in more detail herein, the fiber optic terminal **30** and its internal components facilitate making optical connections between optical fiber(s) provided by a network-side cable **46** and a subscriber-side cable **48**. Both may be distribution cables. The fiber optic terminal **30** may be particularly suited for high volume/density optical connections. The network-side cable **46** provides one or more

optical fibers configured to be optically connected to a fiber optic network for carrying optical signals to and from the fiber optic network. The subscriber-side cable **48** also contains one or more optical fibers, but the one or more optical fibers are configured to be run towards the end subscribers either directly, or through one or more intermediate terminals and/or other optical components. Thus, when an optical fiber(s) provided in the network-side cable **46** is optically connected to an optical fiber(s) provided in the subscriber-side cable **48**, an optical connection can be established between an end subscriber and a fiber optic network.

[0025] As illustrated in **FIGS. 2** and **4**, the fiber optic terminal **30** is mounted on a network-side cable **46** and a subscriber-side cable **48** via respective cable port assemblies **50**, **52** provided in the base **32**. Each port assembly **50**, **52** is comprised of a transport tube **51**, **53** coupled to ports **55**, **57** provided in the base **32** and configured to receive the network-side cable **46** and the subscriber-side cable **48**, respectively. The transport tubes **51**, **53** may provide strain relief to the network-side cable **46** and a subscriber-side cable **48**. Although only one network-side cable **46** and subscriber-side cable **48** are illustrated, note that the fiber optic terminal **30** could be provided with multiple ports to accept and provide optical connections between multiple network-side cables **46** and/or subscriber-side cables **48**. The cable port assemblies **50**, **52** in the fiber optic terminal **30** facilitate receipt and routing of the network-side cable **46** and the subscriber-side cable **48** behind a transition panel **54** disposed within the interior cavity **40**. The transition panel **54** is comprised of a front side **61** and a rear side **63** and is configured to divide the interior cavity **40** into a lower fiber management area **56** and an upper fiber management area **58** (see **FIG. 5**). The lower fiber management area **56** is located on the rear side **63** of the transition panel **54** in the illustration of the fiber optic terminal **30**. The upper fiber management area **58** is located on the front side **61** of the transition panel **54** in the illustration of the fiber optic terminal **30**.

[0026] Although the transition panel **54** is illustrated in the stowed position in **FIG. 2**, the transition panel **54** is rotatable relative to the base **32** through an angle of approximately one hundred and ten (110) degrees between the stowed position and the deployed position, although any degree of rotation can be provided. The transition panel **54** is generally rectangular and is hingedly affixed to the base **32** along the upper edge of the side wall **36** at one or more hinge locations **59** as shown in **FIG. 2**. The hinge locations **59** are located on the same side wall **36** as the one or

more hinge locations **38** that hingedly affix the cover **34** to the base **32** in this embodiment. However, the hinge locations **59** may be located on the opposite side wall **36** as the hinge locations **38**. Alternatively, the transition panel **54** may be slidably attached to the base **32** to selectively expose portions of the interior cavity **40** of the base **32**, or may be removably attached to the base **32** to provide unobstructed access to the interior cavity **40**. Any configuration is possible as long as there is sufficient space provided in the upper fiber management area **58** to route the transport tubes **51**, **53** of the network-side cable **46** and the subscriber-side cable **48** between the cable port assemblies **50**, **52** and the transition panel **54**. Although not shown, the base **32** and/or the transition panel **54** may be provided with conventional means for securing the transition panel **54** to the base **32** in the closed configuration. Furthermore, the base **32** and/or transition panel **54** may be provided with conventional means for retaining the transition panel **54** in the opened configuration. If necessary, the transition panel **54** may also be provided with lengthwise and/or widthwise stiffening ribs to strengthen and prevent distortion of the transition panel **54**.

[0027] In this embodiment of the fiber optic terminal **30**, the cable port assemblies **50**, **52** are provided in the base **32** such that the network-side cable **46** and the subscriber-side cable **48** are routed into the lower fiber management area **56**. The transition panel **54** is movable relative to the base **32** to expose the lower fiber management area **56** to a field technician initially installing the fiber optic terminal **30** or subsequently reconfiguring the optical fiber connections within the fiber optic terminal **30**. There, the cable jackets of the network-side cable **46** and the subscriber-side cable **48** can be stripped away to expose the one or more optical fibers carried therein for preparing optical interconnections within the fiber optic terminal **30**. Optical interconnections may include splicing the optical fibers carried in the network-side cable **46** and subscriber-side cable **48** as will be discussed below in more detail.

[0028] As will be described herein, eventually, one or more network fibers from the network-side cable **46** and one or more fibers from the subscriber-side cable **48** are optically connected to each other via an adapter module **60**. An adapter module is a module that contains or supports a plurality of fiber optic adapters. The adapter module **60** may be integrally formed as part of a mold of a transition panel or provided as a separate module which may be attached to a transition panel. More than

one adapter module 60 may be provided, but the fiber optic terminal 30 illustrated in FIG. 2 contains one adapter module 60. The adapter module 60 contains one or more adapter panels 62. An adapter panel 62 is a panel that is configured to support a plurality of fiber optic adapters 64. The fiber optic adapters 64 support making optical connections between one or more network fibers from the network-side cable 46 and one or more fibers from the subscriber-side cable 48. In this embodiment, each adapter panel 62 contains at least one input fiber optic adapter 66 and at least one output fiber optic adapter 68. In the fiber optic terminal 30 of FIG. 2, one input fiber optic adapter 66 and sixteen (16) output fiber optic adapters 68 are illustrated as being supported by each adapter panel 62. Behind the transition panel 54 in the lower fiber management area 56, as will be described in more detail below, one or more fibers from the network-side cable 46 will be exposed, spliced, and optically connected to one or more input fiber optic adapters 66. One or more fibers from the subscriber-side cable 48 will also be exposed, spliced, and optically connected to one or more output fiber optic adapters 68. One fiber can be connected to each fiber optic adapter 66, 68 provided in the adapter module 60.

[0029] To make an optical connection between one or more network fibers from the network-side cable 46 and one or more fibers from the subscriber-side cable 38, an input fiber 70 is provided that is connectorized on one end and connected to an input fiber optic adapter 66 to optically connect the input fiber 70 to a fiber provided by the network-side cable 46. The other end of the input fiber 70 is input into an optical splitter 72. The optical splitter 72 is configured to split optical signals carried by the input fiber 70, via connection to the input fiber optic adapter 66, into a plurality of connectorized output fibers 74. One or more of the output fibers 74 can then be connected into one or more of the output fiber optic adapters 68 to optically connect fibers in the subscriber-side cable 48 to optical fibers in the network-side cable 46. The adapter panels 62 are configured to provide both input and output fiber optic adapters 66, 68 on the same panel to facilitate ease in initially installing or reconfiguring optical connections. Further, any fiber optic adapter and number of same can be configured as either input or output fiber optic adapters 66, 68 to provide flexibility when installing or reconfiguring optical connections. A fiber park area 75 is provided in the upper fiber management area 56 to provide room for the output fibers 74 to be located or parked when not connected to the output fiber optic adapters 68 and optical splitter(s) 72, if provided

[0030] The fiber optic adapters **66**, **68** are LC adapters in the embodiment of **FIG. 2**, but may be of any connection type, including but not limited to SC, LC, MTP, FC, ST, MU, or MTRJ. Also, as illustrated in **FIG. 2**, the fiber optic terminal **30** is configured for forty-eight (48) subscribers, whereby several input fibers may be split into sixteen (16) fibers. Two optical splitters **72** are provided in this regard in the fiber optic terminal **30**, since each optical splitter **72** provided therein can optically split optical signals carried by the input fiber **70** into sixteen (16) output fibers. Note however that any splitting configuration is possible to be provided by the fiber optic terminal **30**, including providing one or more than two optical splitters **72**. Other splitter configuration examples include, without limitation, 1x32, 1x16 and 1x8. The splitter configuration depends on factors such as the number of network-side cables **46**, the number of subscriber-side cables **48**, the available space in the upper fiber management area **58**, and the connector type for the fiber optic adapters **66**, **68**. For example, for SC connector types, the fiber optic terminal **30** may accommodate one (1) 1x32 optical splitter for a total of thirty-two (32) output fibers **74**, three (3) 1x16 optical splitters or six (6) 1x8 optical splitters for a total of forty-eight (48) output fibers **74**. LC connector types may accommodate three (3) 1x32 optical splitters, six (6) 1x16 optical splitters, or twelve (12) 1x8 optical splitters for a total of ninety-six (96) output fibers **74**.

[0031] **FIG. 2** illustrates the fiber optic terminal **30** with exemplary finalized optical connections made on the adapter module **60**. The components and aspects of the fiber optic terminal **30** to route optical fibers from the network-side cable **46** and the subscriber-based cable **48** to optically connect optical fibers provided therein to the input and output fiber optic adapters **66**, **68**, respectively, will now be described. **FIG. 4** illustrates the fiber optic terminal **30** of **FIG. 2** with the transition panel **54** opened showing the lower fiber management area **56** to show exemplary routing and connections that may be provided for optical fiber(s) from the network-side cable **46** and the subscriber-side cable **48** to the fiber optic adapters **66**, **68**. As previously discussed and illustrated in **FIG. 2**, providing optical fiber(s) from the network-side cable **46** and the subscriber-based cable **48** to the fiber optic adapters **66**, **68** supplied by adapter panel(s) **62** facilitates making optical connections in the upper fiber management area **58** of the fiber optic terminal **30**, as previously discussed and illustrated in **FIG. 2**.

[0032] In order to assist or prevent a technician from incorrectly installing an input fiber 70 into an output fiber optic adapter 68, and/or an output fiber 74 into an input fiber optic adapter 66, the input fiber 70 and/or output fibers 74 from the optical splitter 72 in the fiber optic terminal 10 may be marked. Such may be marked by cable jackets or sleeves of different colors or other visual markings, such as lines, symbols, etc. For example, as illustrated in **FIG. 2**, the input fiber 70 is marked by being solid, which could be indicative of any type of marking, coloring, or other visual indicator. Also, as illustrated in **FIG. 2**, the input fiber optic adapter 66 can also be marked in lieu of or in addition to marking of the input fiber 70. The marking on the fiber optic adapter 66 is illustrated as a dot, but can be any other type of marking. Other or similar marking may also be provided on the output fibers 74 and/or the output fiber optic adapters 68 in the same or similar regard to allow a technician to distinguish input fibers 70 from output fibers 74 and/or input fiber optic adapters 66 from output fiber optic adapters 68. Further, the fiber optic adapters 66, 68 may be shuttered, or the fiber optic adapters 66, 68 keyed with a corresponding matching key provide on the input fiber 70 and/or the output fibers 74 to prevent an input fiber 70 from being connected to an output fiber optic adapter 68 and/or an output fiber 74 from being connected into an input fiber optic adapter 66.

[0033] As illustrated in **FIG. 4**, the transition panel 54 contains one or more openings 65 to support one or more fiber optic adapters 66, 68 as part of the adapter module 60 for supporting optical connections as previously described. One or more network-side fibers 76 are provided in the lower fiber management area 56 in this example. The network-side fiber(s) 76 is an optical fiber from the network-side cable 46. The network-side cable 46 is not shown coming into the lower fiber management area 56, but will typically be done when the fiber optic terminal 30 is installed. A technician will typically strip the cable jacket around the network-side cable 46 run inside the base 32 and into the lower fiber management area 56 to expose the one or more network-side fibers 76. The network-side fiber(s) 76 can be routed through the lower fiber management area 56 through one or more fiber routing guides 78. The fiber routing guides 78 can route the network-side optical fiber(s) 76 and/or provide for slack storage of the network-side optical fiber(s) 76 if needed. The network-side fiber(s) 76 can then connect to a conventional splice tray 80. Inside the splice tray 80, one or more network-side splices or splice holders are provided to splice the network-side optical fiber(s) 76 into one or more input pigtails 82 for each network-side optical

fiber 76 in any known manner. Such includes fusion or mechanical splicing. For purposes of clarity, only a representative one of the network-side fibers 76 existing in the splice tray 80 and terminating into an input pigtail 82 is described herein. However, it will be readily apparent and well understood by one of ordinary skill in the art that other network-side optical fibers, if provided, can be spliced into input pigtails and routed in the substantially the same manner.

[0034] Upon exiting the splice tray 80, the input pigtail 82 can be routed around one or more of the fiber routing guides 78 to the underside of the transition panel 54 to an input fiber optic adapter 66 provided in an adapter panel 62. In this manner, the input pigtail 82 is optically connected to an input fiber optic adapter 66 so as to be accessible in the upper fiber management area 58 for a technician to establish optical connections to the network-side fiber(s) 76 without having to open the transition panel 54 and expose the lower fiber management area 56, if desired. FIG. 5 illustrates a cross-sectional side view of the fiber optic terminal 30 to further illustrate the fiber optic adapters 66, 68 extending through the adapter module 60 to the lower fiber management area 56. As illustrated in this example, the fiber optic adapters 66, 68 are optically connected to corresponding fiber optic adapters 84 provided on the underneath side of the adapter module 60. In this manner, the input pigtail 82 can be connected to any fiber optic adapter 84 desired in the lower fiber management area 56 for a corresponding fiber optic adapter on the adapter module 60 in the upper fiber management area 58 to become an input fiber optic adapter 66. Thus, the adapter module 60 provided in the fiber optic terminal 30 allows for different fiber optic adapters 84 and their corresponding fiber optic adapters 66, 68 to be configured as either an input fiber optic adapter 66 or an output fiber optic adapter 68 depending on whether an input pigtail 82 or fiber from the subscriber-side cable 48 is optically connected to the fiber optic adapter 66, 68. In this embodiment of the fiber optic terminal 10, the pitch between the rows of fiber optic adapters 84 is approximately 0.62 inches and the pitch between fiber optic adapters 84 is about 0.75 inches.

[0035] Once the input pigtail 82 is routed and optically connected to an input fiber optic adapter 66, an optical connection can be established to the network-side fiber(s) 76 provided by network-side cable 46 by connecting a fiber to the input fiber optic adapter 66. Next, the routing of one or more fibers provided by the subscriber-side cable 48 are discussed to establish optical connections to one or more of the output fiber optic adapters 68. Once established, one or more optical fibers between the

network-side cable **46** and the subscriber-side cable **48** can be optically connected to each other by coupling input and output fiber optic adapters **66, 68** together.

[0036] Turning back to **FIG. 4**, one or more subscriber-side fibers **86** is provided in the lower fiber management area **56**. The subscriber-side fiber(s) **86** is an optical fiber from the subscriber-side cable **48**. The subscriber-side cable **48** is not shown coming into the lower fiber management area **56**, but will typically be done when the fiber optic terminal **30** is installed. A technician will typically strip the cable jacket around the subscriber-side cable **48** run inside the base **32** and into the lower fiber management area **56** to expose the one or more subscriber-side fibers **86**. The subscriber-side fiber(s) **86** can also be routed through the lower fiber management area **56** through the one or more fiber routing guides **78**. The fiber routing guides **78** can route the subscriber-side fiber(s) **86** and/or provide for slack storage of the subscriber-side fiber(s) **86** if needed. The subscriber-side fiber(s) **86** are then optically connected to the splice tray **80**. Inside the splice tray **80**, one or more subscriber-side splices or splice holders are provided to splice the subscriber-side fiber(s) **86** into one or more output pigtails **88** for each subscriber-side fiber **86** in any known manner. Such includes fusion or mechanical splicing. For purposes of clarity, only a representative one of the subscriber-side fibers **86** existing in the splice tray **80** and terminating in an output pigtail **88** is described herein. However, it will be readily apparent and well understood by one of ordinary skill in the art that other subscriber-side fibers, if provided, can be spliced into output pigtails and routed in the substantially the same manner.

[0037] Upon exiting the splice tray **80**, the output pigtail **88** can be routed around one or more of the fiber routing guides **78** to the underside of the transition panel **54** to an output fiber optic adapter **68**. In this manner, the output pigtail **88** is optically connected to an output fiber optic adapter **68** accessible in the upper fiber management area **58** for a technician to establish optical connections to the subscriber-side fiber(s) **76** without having to open the transition panel **54** and expose the lower fiber management area **56**, if desired.

[0038] At this point, one or more network-side optical fibers **76** from the network-side cable **46** and one or more subscriber-side optical fibers **86** from the subscriber-side cable **48** have been received, routed, spliced into input and output pigtail(s) **82, 88** and connected to fiber optic adapter(s) **84** located in the back side of the transition panel **54** on the same adapter panel **62**. When these connections are finalized, a

technician can close the transition panel **54** to close off the lower fiber management area **56** and make any optical connections desired in the upper fiber management area **58** via optical connections using a coupling fiber or input and output fibers **70**, **74** between the input and output fiber optic adapters **66**, **68**, respectively, as previously discussed.

[0039] Variations of the fiber optic terminal **30** and its components are possible. The components described above in the fiber optic terminal **30** are not limited to inclusion in any particular area or manner, including the upper fiber management area **58** or the lower management area **56**. As an example, **FIG. 6** illustrates the fiber optic terminal **30** of **FIG. 2**, but having an alternative optical fiber parking area **89** for unconnected output fibers **74**. The optical fiber parking area **89** may be comprised of a protruding portion **91** molded into a transition panel **54'** that contains one or more orifices **93**. A parked optical fiber **74'** can be inserted into an orifice **93** extending through the transition panel **54'** into the lower fiber management area **56**. If an optical splitter **72** is employed in the fiber optic terminal **30**, output fibers **74** for each optical split will typically be provided from the optical splitter **72** even if not connected to output fiber adapters **68** on the adapter module **60**. This scenario would exist when an optical fiber is run to an end subscriber, but the subscriber's optical fiber has not yet been connected. In such case, it may be desirable to "park" any unconnected output fibers **74'** to prevent them from being damaged when installing or reconfiguring other input and/or output fibers **70**, **74**. In this regard, as illustrated in **FIG. 6**, an unconnected output fiber **74'** from one or more of the optical splitters **72** may be parked in the optical fiber parking area **89**. An optional fiber support **95** may also be provided as part of the transition panel **54'** to guide parked optical fibers to prevent them from dropping to the bottom of the transition panel **54'** and incurring sharp bending.

[0040] As an example of another variation, the optical splitters **72** do not have to be provided on the transition panel **54** in the upper fiber management area **58**. **FIG. 7** illustrates a transition panel **54** where two optical splitters **72** provided on the rear side **63** of the transition panel **54** such that the optical splitters **72** are contained in the lower fiber management area **56** when the transition panel **54** is closed on the base **32**. Although not limiting, providing optical splitters **72** on the rear side **63** of the transition panel **54** may be well-suited when using input and output fibers **70**, **74** that are smaller in diameter, such as 900 micrometers (μm) for example. Space limitations

in the lower fiber management area **56** and routing limitations between the rear side **63** and front side **61** of the transition panel **54** could be factors affecting providing optical splitters **72** on the rear side **63** of the transition panel **54**.

[0041] The fiber optic terminal **30** may be installed in any location or premise. The fiber optic terminal **30** described herein may be particularly suited for MDUs, because the fiber optic terminal **30** is capable of providing high density optical connections between a network-side cable(s) and a subscriber-side cable. Further, the fiber optic terminal **30** may be configured as either an LCP or an FDT. In this regard, **FIG. 8** illustrates the fiber optic terminal **30** provided as both LCPs and FDTs installed in an MDU **90**. The MDU **90** may comprise an apartment building having nine (9) dwelling units **92** for illustrative purposes only. The fiber optic terminal **30**, configured as a LCP **94**, is positioned on the ground floor or basement in the illustrated embodiment; however, the LCP of further embodiments is positioned at any location relative to the MDU. The LCP **94** includes a cable assembly **96** that is optically connected to a network-side cable **46**, as described above. The network-side cable **46** may be optically connected to a fiber optic network **97**. As also described above, one or more subscriber-side cables **48** carrying optical signals to and from the fiber optic network **97** can be connected to the LCP **94**, and exit the LCP **94** and extend throughout the MDU **90**. The subscriber-side cables **48** carry optical signals to and from the LCP **94** and extend directly to each dwelling unit via subscriber-side fibers or cables **100** and eventually terminate at a subscriber termination point **98**, such as an adapter in a wall outlet, an adapter in a floor panel, an adapter behind a ceiling tile, or the like such that the subscriber can optically connect to a subscriber optical fiber **100**.

[0042] The subscriber-side optical fibers **100** can be directed from optical fibers from the subscriber-side cable **48**, or can be provided from one or more intermediate fiber optic terminals **30** configured as FDTs **102**. FDTs **102** can be provided to simplify the routing and installation of the optical fibers between the LCP **94** and the subscriber termination points **98** by allowing the subscriber optical fibers **100** to be grouped between the LCP **94** and FDTs **102** and then separated at the FDTs **102**. The FDTs **102** are configured to receive the subscriber-side cables **48** and provide the individual subscriber optical fibers **100** to the subscriber termination points **98**. Accordingly, there are fewer optical fibers and/or cables extending between the floors of the MDU **90** thus simplifying routing of optical fibers through the MDU **90**.

Although floors of an MDU **90** are described in the illustrated embodiments, it should be appreciated that FDTs **102** may be used to facilitate optical fiber routing to any layout of areas within an MDU **90**.

[0043] Further, although the subscriber optical fibers **100** and subscriber-side cables **48** include arrows pointing in the direction of the subscriber termination points **98**, it should be appreciated that optical signals may be passed in either direction as required for the particular application; the arrows are merely provided for illustrative purposes.

[0044] As used herein, the term “fiber optic terminal” is intended to include any type of fiber optic terminal. For example, the fiber optic terminal as used herein can be a splice terminal, patch terminal or the like, or any combination thereof. The adapter panels provided in one or more adapter modules in a fiber optic terminal are not limited to provide fiber optic adapters. If fiber optic adapters are provided, the fiber optic adapters may be for any type of optical connector, including but not limited to an LC, SC, MTP, FC, ST, MU, or MTRJ, without limitation.

[0045] The fiber optic terminal **30** may be installed in any location, including an aerial location, buried, or disposed in a larger enclosure, such as a ground pedestal. The network-side and subscriber-side cables **46**, **48** may be any type of fiber optic cable and include any type of optical fibers in any form. The term “optical fibers” as used herein is intended to include all types of optical fibers, including but not limited to loose buffered optical fibers, and in any form, including but not limited to a multi-fiber ribbon, individual optical fibers, or any other known expedient of a fiber optic cable. Additionally, the optical fibers may have various diameters, including for example only, diameters of 900 micrometers (μm), 2 millimeters (mm) and 3 mm.

[0046] The fiber optic terminals disclosed herein may be used for any fiber optic distribution application, including but not limited to directly or intermediately routing fiber optic cables and optical fibers from a fiber optic network(s) to end subscribers, including but not limited to various fiber-to-the-premises (FTTP), fiber-to-the-home (FTTH), and other fiber initiatives (generally described as FTTx). Subscriber premises include, but are not limited to single-dwelling units (SDU), multi-dwelling units (MDU), businesses, and/or other facilities or buildings.

[0047] Although the present invention has been illustrated and described herein with reference to preferred embodiments and specific examples thereof, it will be readily apparent to those of ordinary skill in the art that other embodiments and

examples can perform similar functions and/or achieve like results. All such equivalent embodiments and examples are within the spirit and scope of the present invention and are intended to be covered by the appended claims. It will also be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the spirit and scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A fiber optic terminal, comprising:
 - a base configured to receive at least one network-side fiber and a plurality of subscriber-side fibers;
 - an adapter module comprising at least one adapter panel, comprised of:
 - at least one input fiber optic adapter configured to optically connect to the at least one network-side fiber; and
 - a plurality of output fiber optic adapters configured to optically connect to the plurality of subscriber-side fibers; and
 - an optical splitter configured to optically split an input fiber into a plurality of output fibers;
 - wherein the at least one input fiber optic adapter is configured to optically connect to the input fiber and the plurality of output fiber optic adapters are configured to optically connect to one or more of the plurality of output fibers, to optically connect the at least one network-side fiber to one or more of the plurality of subscriber-side fibers.
2. The fiber optic terminal of claim 1, wherein the at least one network-side fiber is provided in a network-side cable, and the plurality of subscriber-side fibers are provided in a subscriber-side cable.
3. The fiber optic terminal of claim 1, wherein the fiber optic terminal is a terminal comprised from the group consisting of a fiber distribution terminal (FDT) and a local convergence point (LCP).
4. The fiber optic terminal of claim 1, further comprising:
 - at least one network-side splice configured to splice the at least one network-side fiber into at least one input pigtail;
 - wherein the at least one input pigtail is configured to optically connect to the at least one input fiber optic adapter to optically connect the at least one network-side fiber to the at least one input fiber optic adapter.

5. The fiber optic terminal of claim 1, further comprising:
a plurality of subscriber-side splices configured to splice the plurality of subscriber-side fibers into a plurality of output pigtails;
wherein the plurality of output pigtails are configured to optically connect to one or more of the plurality of output fiber optic adapters to optically connect the plurality of subscriber-side fibers to the one or more of plurality of output fiber optic adapters.
6. The fiber optic terminal of claim 1, wherein the adapter module is disposed within the base of the fiber optic terminal.
7. The fiber optic terminal of claim 6, further comprising a transition panel coupled to the base, wherein the adapter module is attached to the transition panel.
8. The fiber optic terminal of claim 7, wherein the transition panel is hingedly affixed to the base to rotate about the base.
9. The fiber optic terminal of claim 7, wherein the transition panel defines a fiber parking area.
10. The fiber optic terminal of claim 9, wherein the transition panel defines at least one protrusion configured to guide one or more of the plurality of output fibers into the fiber parking area.
11. The fiber optic terminal of claim 7, wherein the transition panel includes a front side and a rear side, wherein the adapter module is disposed on the front side of the transition panel.
12. The fiber optic terminal of claim 11, wherein the transition panel defines an upper fiber management area on the front side of the transition panel and a lower fiber management area on the rear side of the transition panel.

13. The fiber optic terminal of claim 12, further comprising a fiber parking area disposed in the upper fiber management area configured to park one or more of the plurality of output fibers.
14. The fiber optic terminal of claim 12, further comprising:
at least one network-side splice located in the lower fiber management area and configured to splice the at least one network-side fiber into at least one input pigtail;
wherein the at least one input pigtail is configured to optically connect to the at least one input fiber optic adapter to optically connect the at least one network-side fiber to the at least one input fiber optic adapter.
15. The fiber optic terminal of claim 12, further comprising:
a plurality of subscriber-side splices located in the lower fiber management area and configured to splice the plurality of subscriber-side fibers into a plurality of output pigtails;
wherein the plurality of output pigtails are configured to optically connect to one or more of the plurality of output fiber optic adapters to optically connect the plurality of subscriber-side fibers to the one or more of plurality of output fiber optic adapters.
16. The fiber optic terminal of claim 11, wherein the optical splitter is mounted to either the front side of the transition panel or the rear side of the transition panel.
17. The fiber optic terminal of claim 1, wherein the at least one input fiber optic adapter, the plurality of output fiber optic adapters, or both the at least one input fiber optic adapter and the plurality of output fiber optic adapters are keyed.
18. The fiber optic terminal of claim 1, wherein the input fiber, the plurality of output fibers, or both the input fiber and the plurality of output fibers are distinctly marked.

19. A method for optically connecting a subscriber-side fiber to a fiber optic network, comprising:
- providing a fiber optic terminal having an adapter module comprised of at least one adapter panel;
 - providing at least one network-side fiber into the fiber optic terminal;
 - providing a plurality of subscriber-side fibers into the fiber optic terminal;
 - optically connecting the at least one network-side fiber to at least one input fiber optic adapter disposed in the at least one adapter panel;
 - optically connecting one or more of the plurality of subscriber-side fibers to one or more of a plurality of output fiber optic adapters disposed in the at least one adapter panel;
 - providing an optical splitter that splits an input fiber into a plurality of output fibers; and
 - optically connecting the input fiber to the at least one input fiber optic adapter and optically connecting one or more of the plurality of output fibers to one or more of the plurality of output fiber optic adapters, to optically connect the at least one network-side fiber to one or more of the plurality of subscriber-side fibers.
20. The method of claim 19, wherein optically connecting the at least one network-side fiber to the at least one input fiber optic adapter, comprises:
- splicing the at least one network-side fiber into at least one input pigtail; and
 - optically connecting the at least one input pigtail to the at least one input fiber optic adapter.
21. The method of claim 19, wherein optically connecting one or more of the plurality of subscriber-side fibers to one or more of the plurality of output fiber optic adapters comprises:
- splicing one or more of the plurality of subscriber-side fibers into one or more output pigtails; and
 - optically connecting the one or more output pigtails to one or more of the plurality of output fiber optic adapters.
22. The method of claim 19, wherein providing the at least one network-side fiber into the fiber optic terminal comprises providing the at least one network-side fiber

into a lower fiber management area disposed on a rear side of a transition panel disposed in the fiber optic terminal.

23. The method of claim 19, wherein providing the plurality of subscriber-side fibers into the fiber optic terminal comprises providing the plurality of subscriber-side fibers into a lower fiber management area disposed on a rear side of a transition panel disposed in the fiber optic terminal.

1/8

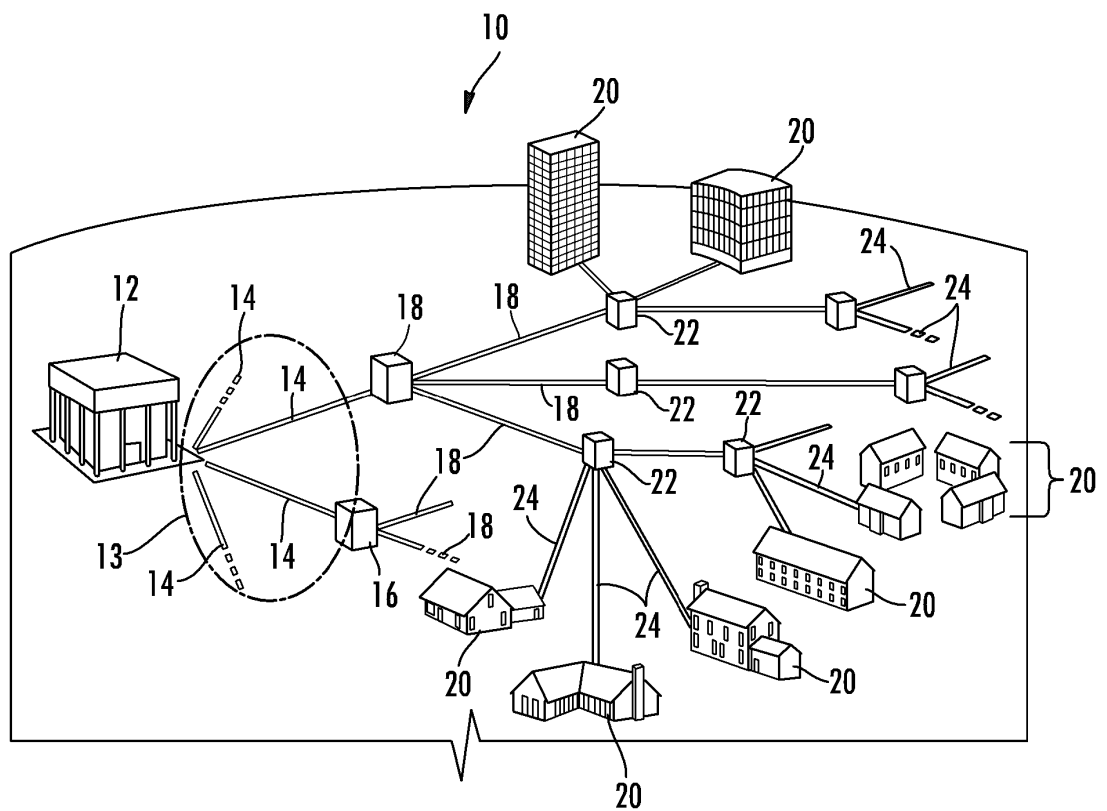


FIG. 1

2/8

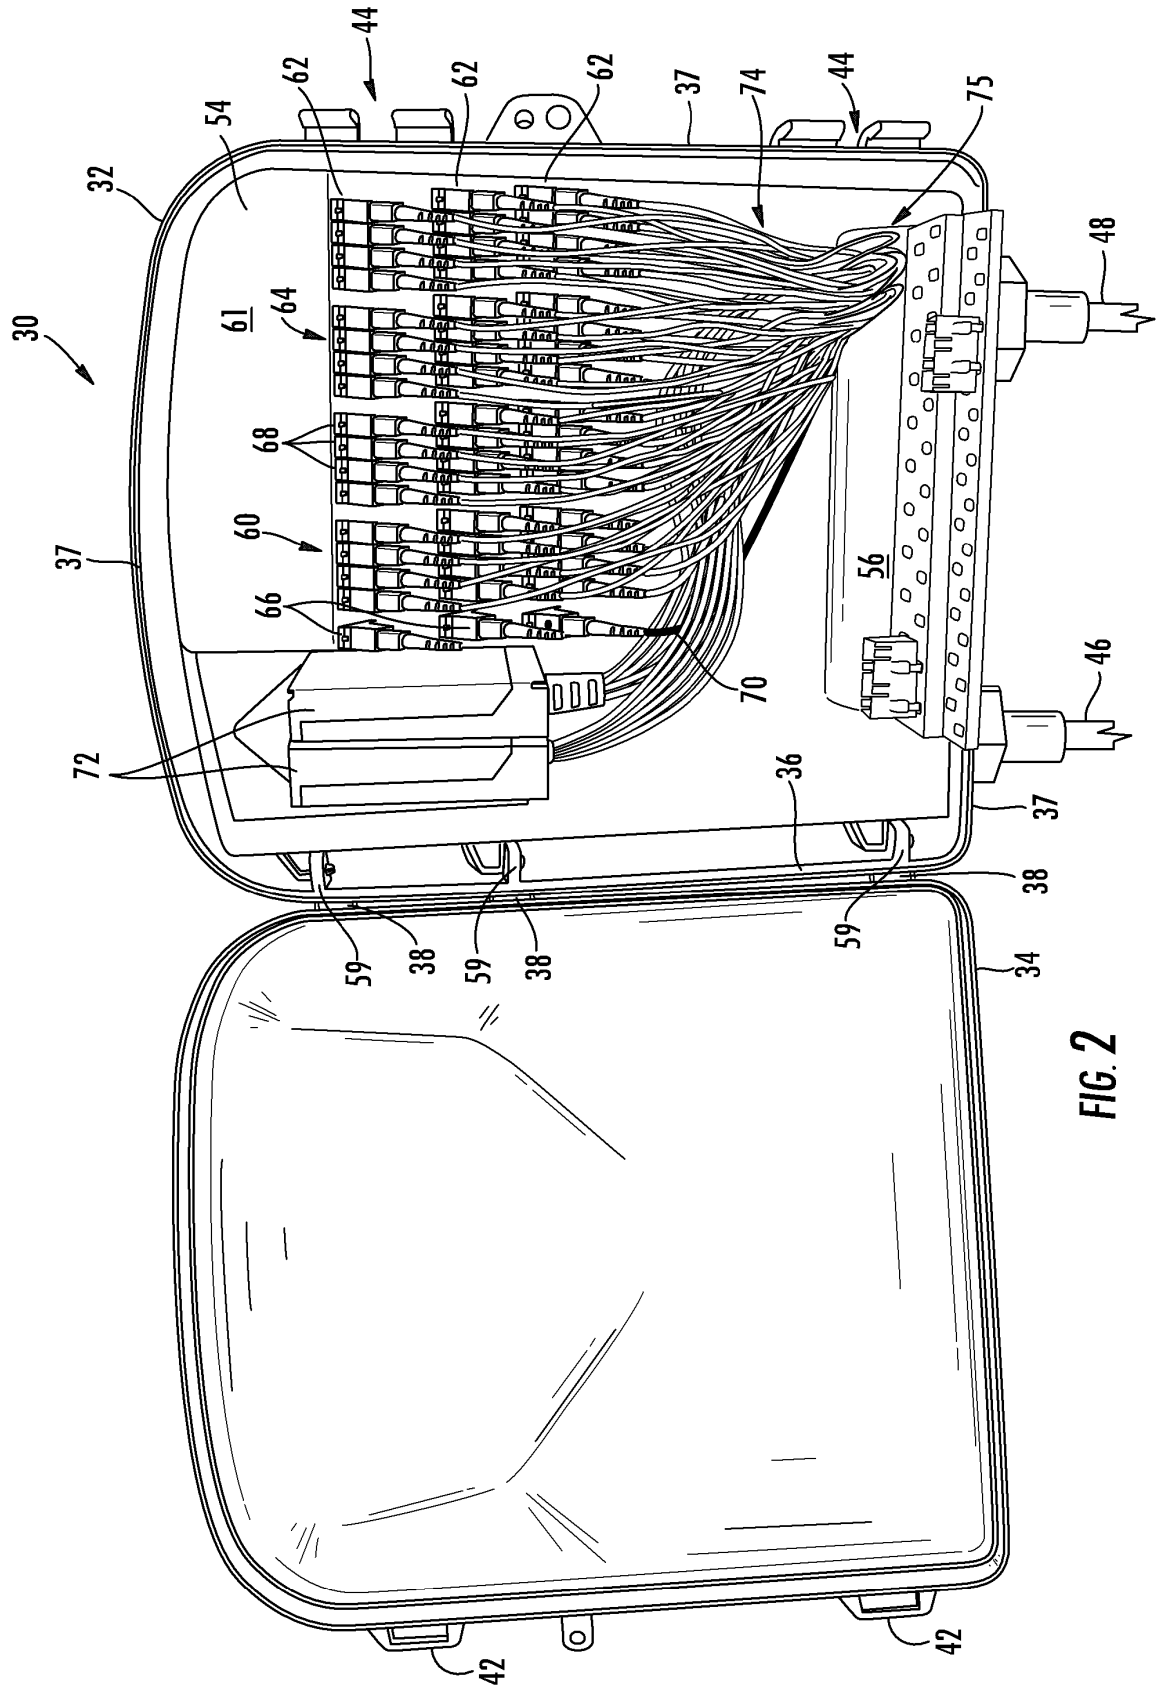


FIG. 2

3/8

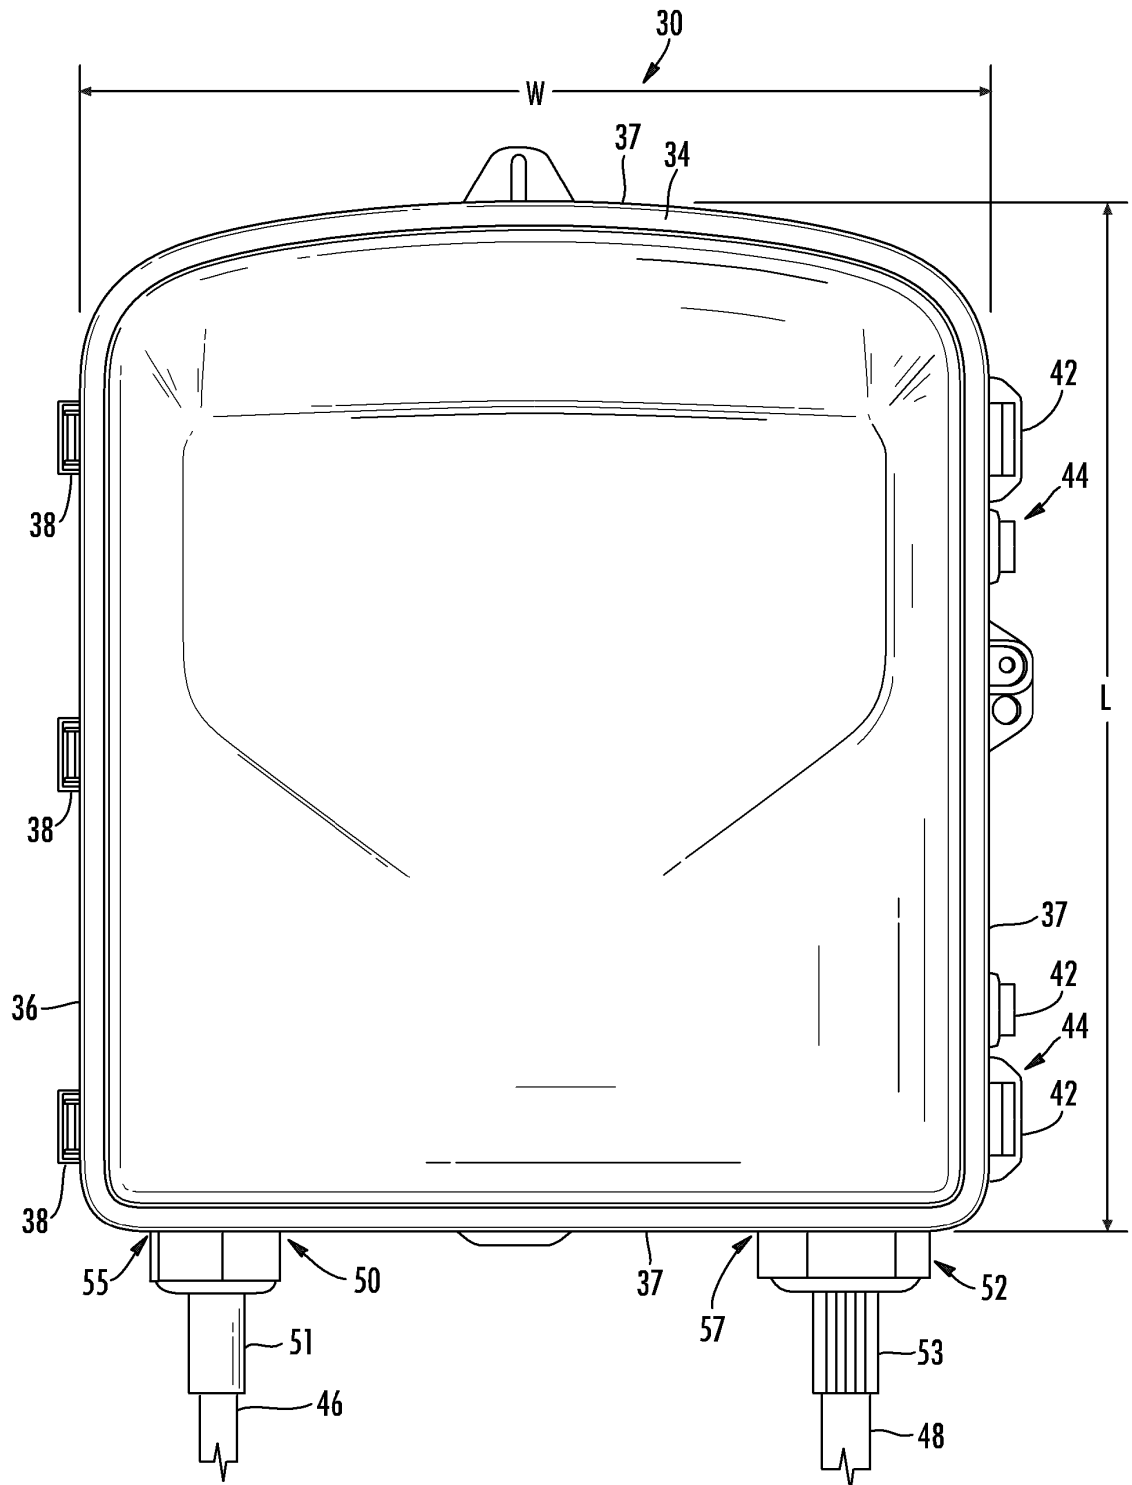


FIG. 3

4/8


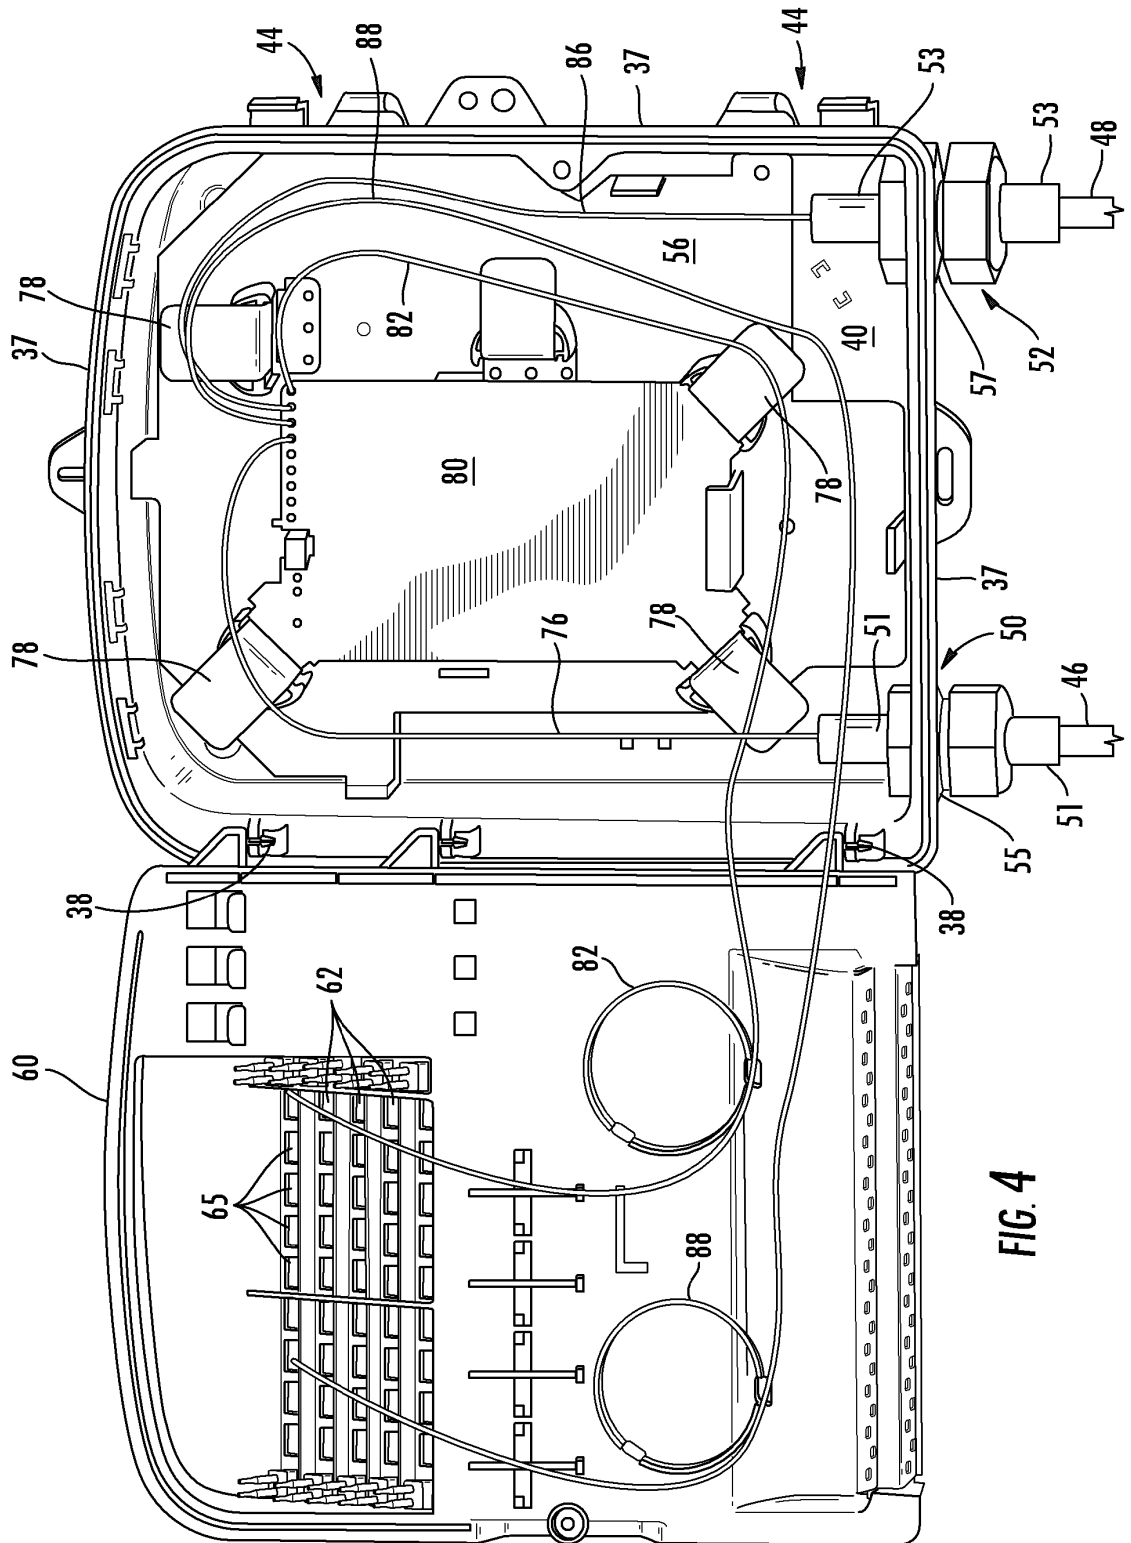


FIG. 4

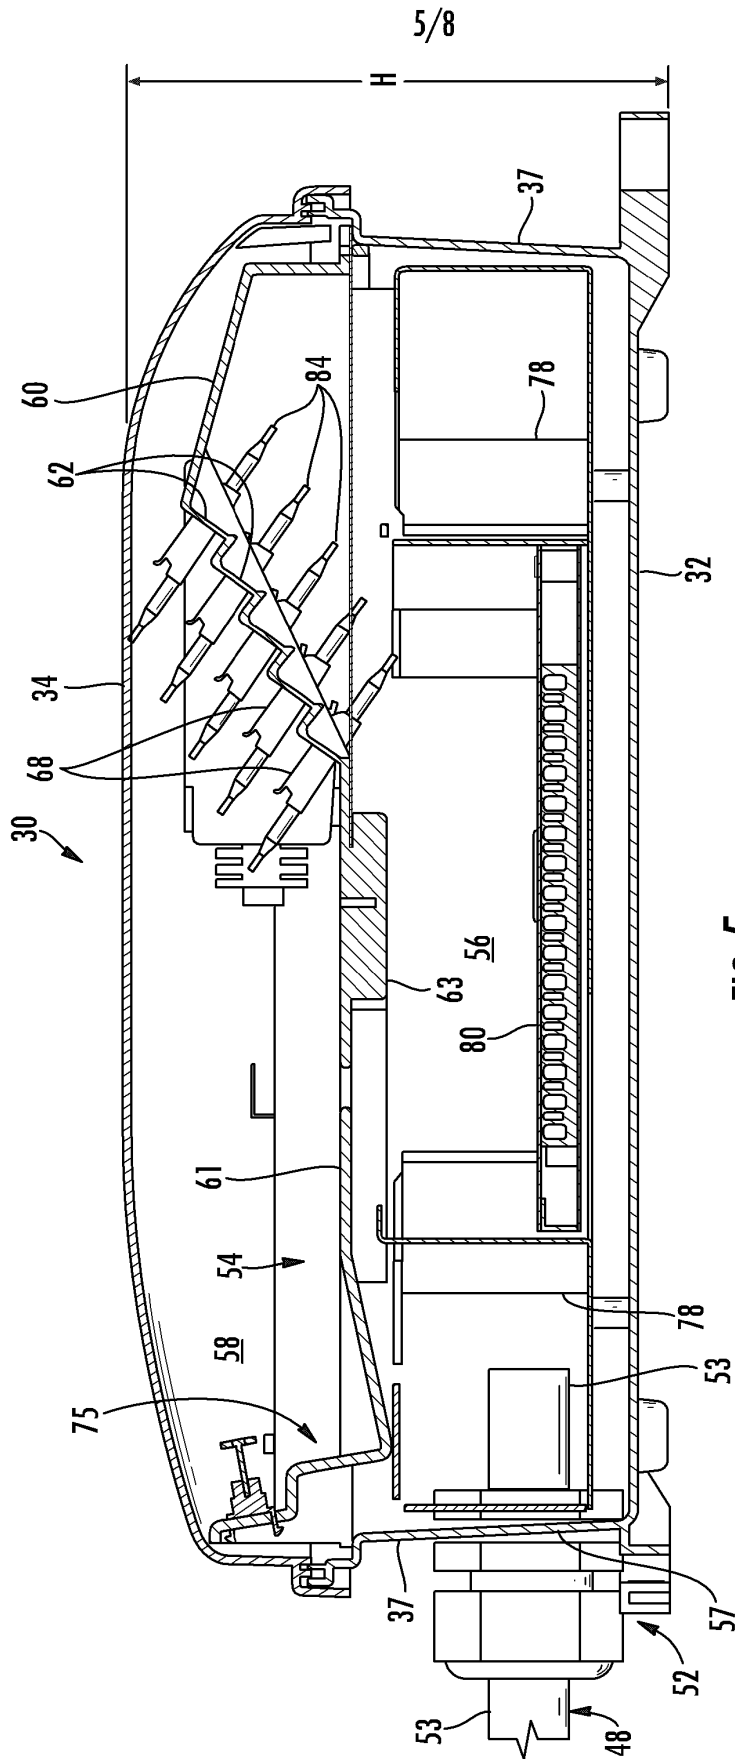

6/8

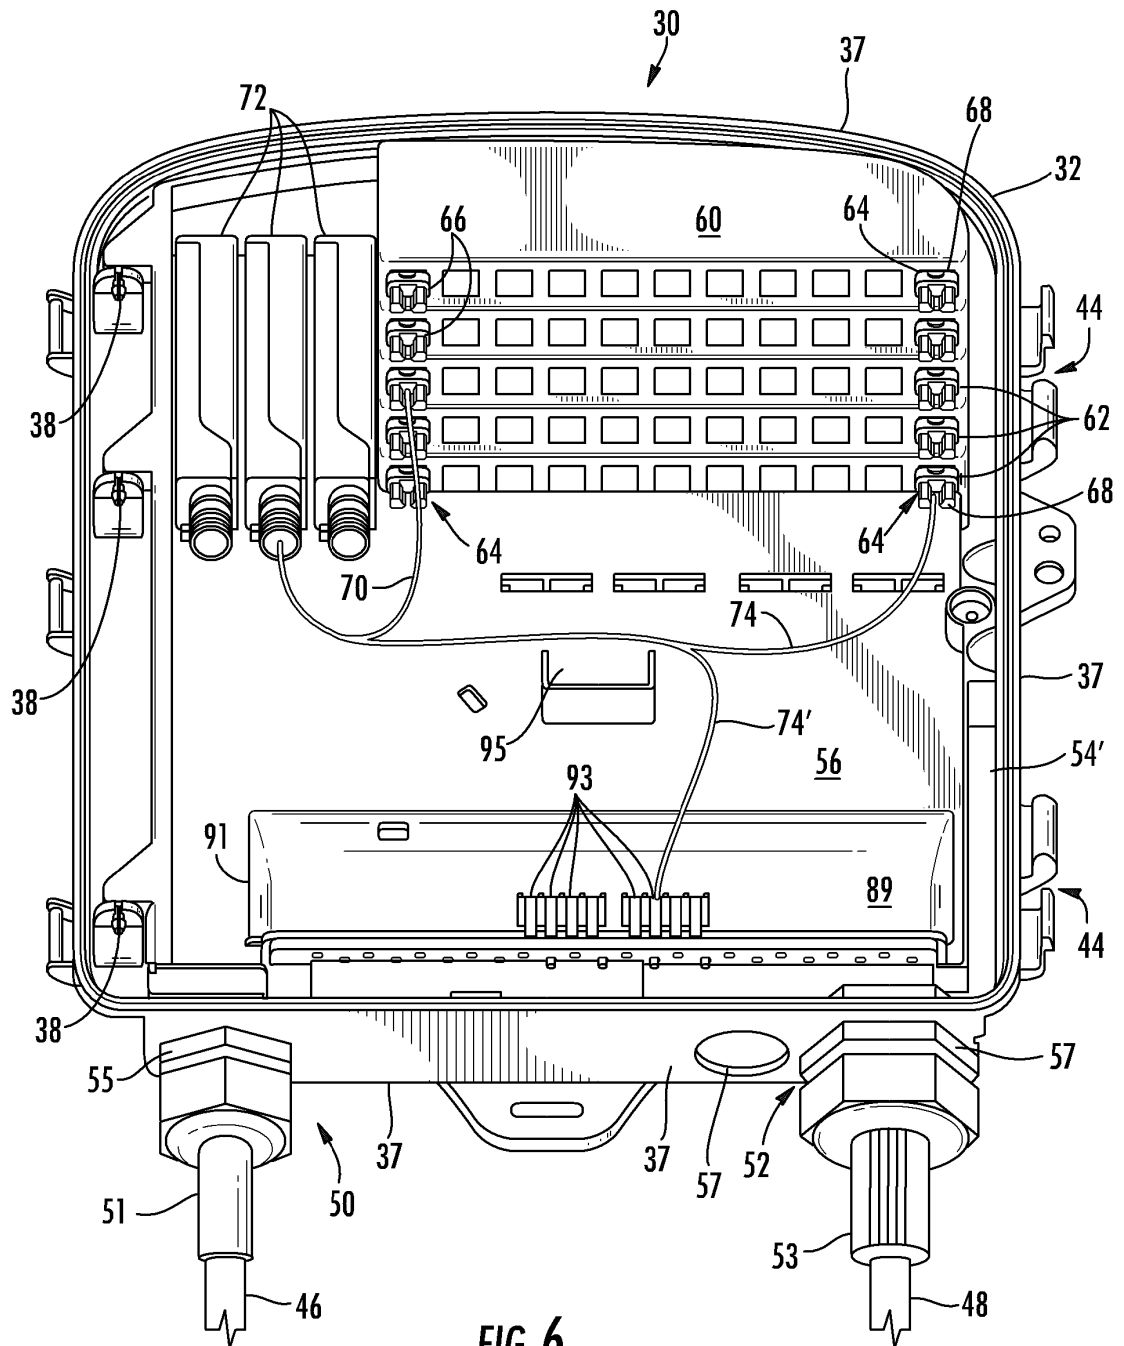


FIG. 6

7/8


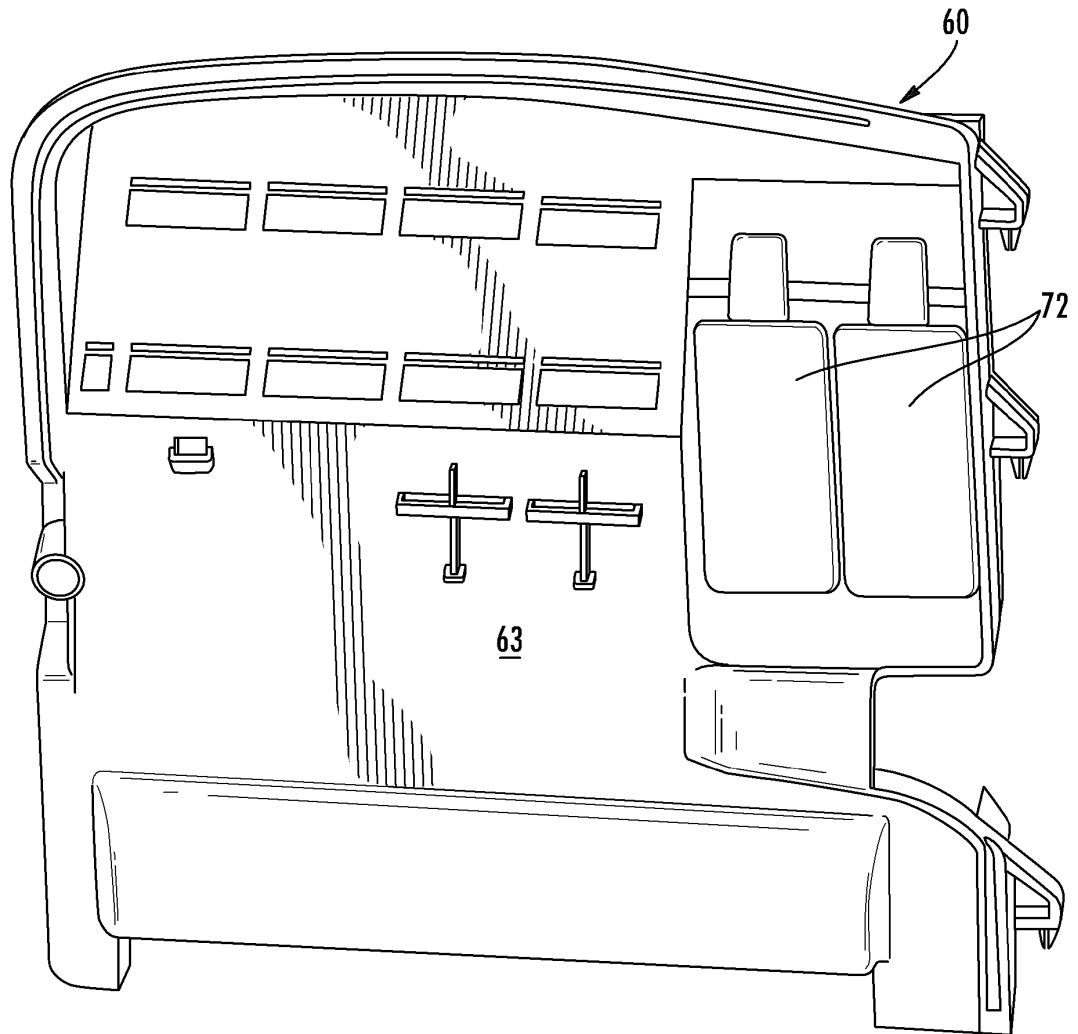


FIG. 7

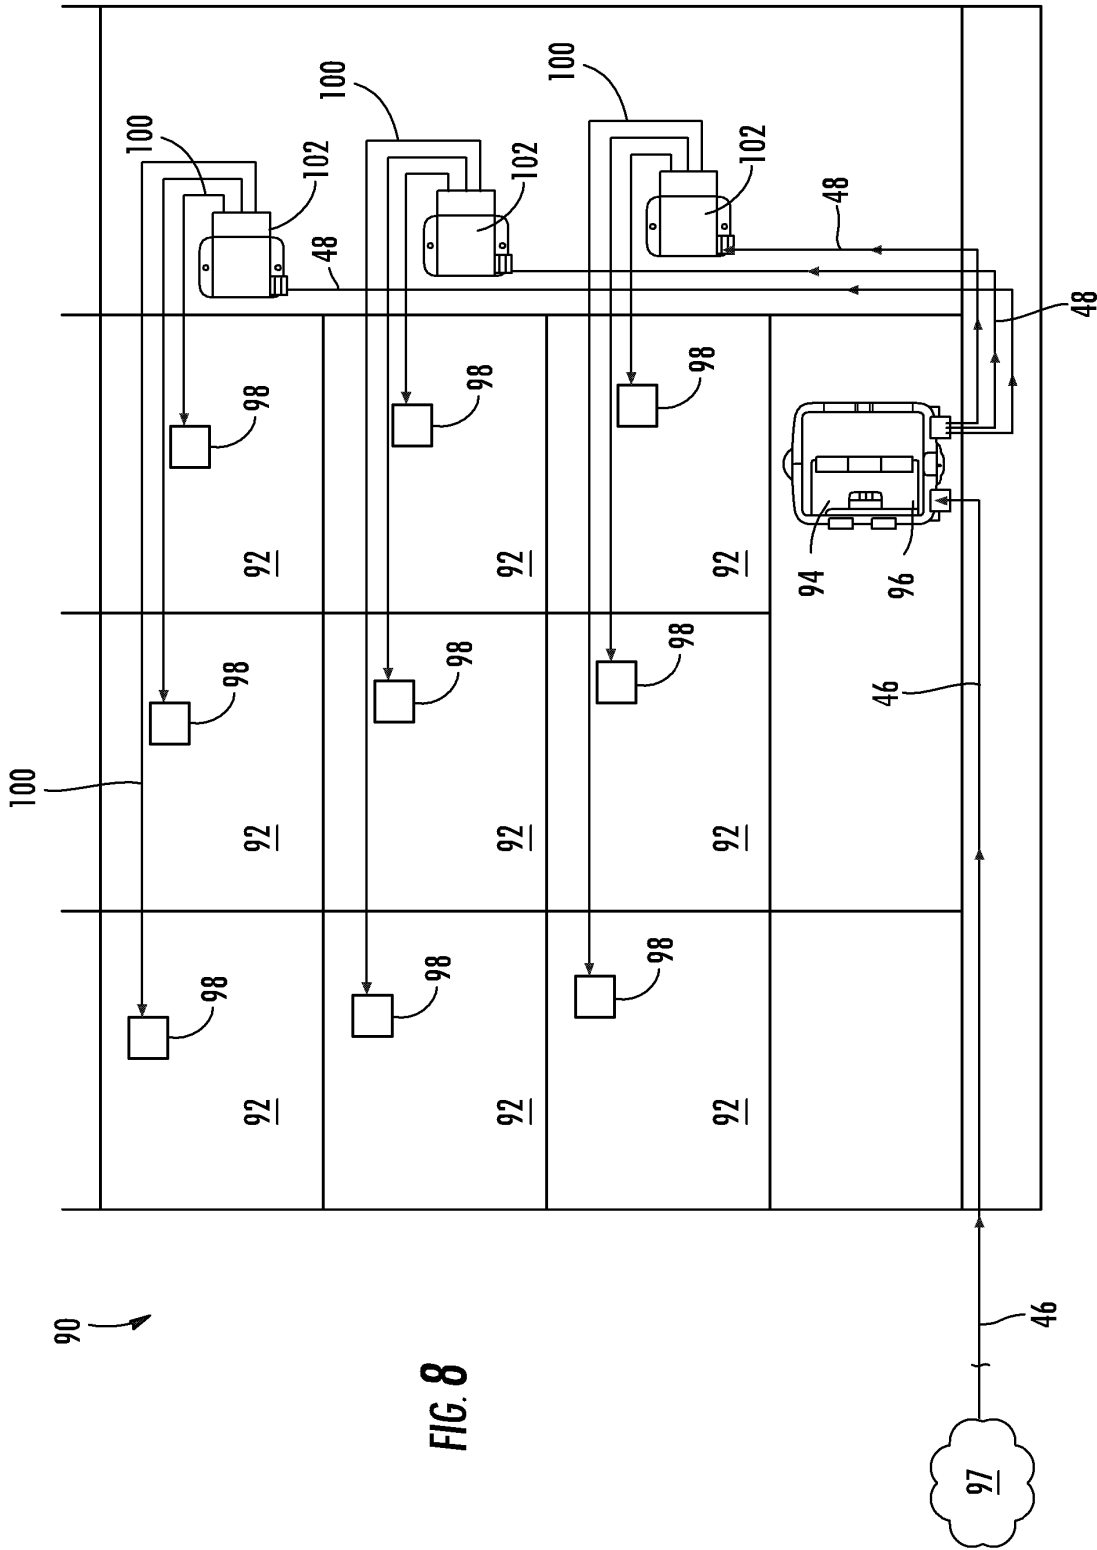

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2008/072625

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G02B6, H04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ, CNPAT: SPLIT+, BRANCH+, DISPART+, SEPARAT+, APART+, ABRUPT+, DIVID+, PORT+, PART+, DISUNIT+, ADAPT+, CONNECT+, COUPL+, SWITCH+, TRANSFER+, SPLIC+, CABLE?, PIGTAIL+, LAYOUT+, WIRING+, DISTRIBUT+, ASSIGN+, ADMEASUR+, INPUT+, OUTPUT+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN2893724Y (CHANGFEI OPTICAL FIBRE & OPTICAL CABLE C), 25 Apr. 2007 (25.04.2007), page 2 to page 3, figs. 2, 3	1-3,6-13,16-19,22,23
Y		4,5,14,15,20,21
Y	CN1969214A (ADC TELECOM INC), 23 May 2007 (23.05.2007), page 4, fig.1	4,5,14,15,20,21
X	US2006/0165366A1 (FEUSTEL, Clay A. et al.), 27 Jul. 2006 (27.07.2006), page 2, figs. 3,4	1-3,6-13,16-19,22,23
Y		4,5,14,15,20,21

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search
09 Jul. 2009 (09.07.2009)

Date of mailing of the international search report
23 Jul. 2009 (23.07.2009)

Name and mailing address of the ISA/CN
The State Intellectual Property Office, the P.R.China
6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China
100088
Facsimile No. 86-10-62019451

Authorized officer
CHEN, Yajuan
Telephone No. (86-10)62085755

Form PCT/ISA/210 (second sheet) (April 2007)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2008/072625

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN2893724 Y	25.04.2007	none	
CN1969214 A	23.05.2007	US2005281526 A	22.12.2005
		US7218827 B	15.05.2007
		AU2005264949 A	26.01.2006
		AU2005264949B	07.08.2008
		WO2006009687 A	26.01.2006
		CA2563448 A	26.01.2006
		US2006177190 A	10.08.2006
		US7277620 B	02.10.2007
		MXPA06013049 A	20.12.2006
		EP1766452 A	28.03.2007
		EP20050771738	13.06.2005
		US2008019655 A	24.01.2008
		US2008025684 A	31.01.2008
		JP2008503771 T	07.02.2008
		US2008317425 A	25.12.2008
US2006/0165366 A1	27.07.2006	KR20060085557 A	27.07.2006
		US7218828 B	15.05.2007
		JP2006209118 A	10.08.2006
		JP4153953 B2	24.09.2008

Form PCT/ISA/210 (patent family annex) (April 2007)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2008/072625

A. CLASSIFICATION OF SUBJECT MATTER

G02B 6/28(2006.01)i

G02B 6/40(2006.01)i