

(56)

References Cited

U.S. PATENT DOCUMENTS

5,784,023	A	7/1998	Bluege	
5,793,034	A	8/1998	Wesolowicz et al.	
5,815,250	A *	9/1998	Thomson et al.	356/5.01
5,847,816	A	12/1998	Zediker et al.	
5,870,180	A	2/1999	Wangler	
5,870,181	A	2/1999	Andressen	
5,914,776	A	6/1999	Streicher	
5,917,596	A	6/1999	Jenkins et al.	
5,923,466	A	7/1999	Krause et al.	
6,034,770	A	3/2000	Kim et al.	
6,173,066	B1	1/2001	Peurach et al.	
6,323,941	B1	11/2001	Evans et al.	
6,411,871	B1	6/2002	Lin	
6,414,746	B1	7/2002	Stettner et al.	
6,434,211	B1	8/2002	Lloyd et al.	
6,448,572	B1	9/2002	Tennant et al.	
6,542,831	B1	4/2003	Moosmuller et al.	
6,608,669	B2	8/2003	Holton	
6,646,725	B1	11/2003	Eichinger et al.	
6,657,733	B1	12/2003	Drake, Jr.	
6,664,529	B2	12/2003	Pack et al.	
6,665,063	B2	12/2003	Jamieson et al.	
6,747,258	B2	6/2004	Benz et al.	
6,804,607	B1	10/2004	Wood	
6,943,868	B2	9/2005	Haig	
6,972,887	B2	12/2005	Wickham et al.	
7,006,203	B1	2/2006	Book et al.	
7,095,488	B2	8/2006	Jamieson et al.	
7,113,886	B2	9/2006	West	
7,142,981	B2	11/2006	Hablani	
7,224,466	B2	5/2007	Ray	
7,224,707	B2	5/2007	Gendron	
7,236,235	B2	6/2007	Dimsdale	
7,240,879	B1	7/2007	Cepollina et al.	
7,277,641	B1	10/2007	Gleckman	
7,342,228	B1	3/2008	O'Connell et al.	
7,345,743	B1	3/2008	Hartman et al.	
7,359,057	B2	4/2008	Schwiesow	
7,397,568	B2	7/2008	Bryce et al.	
7,406,220	B1	7/2008	Christensen et al.	
7,436,494	B1	10/2008	Kennedy et al.	
7,453,552	B1	11/2008	Miesak	
7,532,311	B2 *	5/2009	Henderson et al.	356/4.01
7,580,132	B2	8/2009	Baillon et al.	
2002/0117340	A1	8/2002	Stettner	
2003/0063884	A1	4/2003	Smith et al.	
2004/0021852	A1	2/2004	DeFlumere	
2004/0119838	A1	6/2004	Griffis et al.	
2004/0130702	A1	7/2004	Jupp et al.	
2004/0213463	A1 *	10/2004	Morrison	382/210
2005/0052636	A1	3/2005	Lee et al.	
2005/0060092	A1	3/2005	Hablani	
2005/0099634	A1	5/2005	Dubois et al.	
2006/0088946	A1	4/2006	Willson et al.	
2006/0114447	A1	6/2006	Harris et al.	
2006/0132752	A1	6/2006	Kane	
2006/0136172	A1	6/2006	O'Kane et al.	
2006/0197936	A1	9/2006	Liebman et al.	
2007/0073486	A1	3/2007	Tillotson et al.	
2007/0110364	A1	5/2007	Rice et al.	
2007/0115541	A1	5/2007	Rogers et al.	
2007/0122001	A1	5/2007	Wang et al.	
2007/0171407	A1	7/2007	Cole et al.	
2007/0263676	A1	11/2007	Beukema et al.	
2008/0023587	A1	1/2008	Head et al.	
2008/0136626	A1	6/2008	Hudson et al.	
2008/0212328	A1	9/2008	Minano et al.	
2008/0273560	A1	11/2008	Stelmakh	
2008/0290259	A1	11/2008	Mathewson et al.	
2008/0316498	A1	12/2008	Drake et al.	
2009/0002680	A1	1/2009	Ruff et al.	
2009/0046289	A1	2/2009	Caldwell et al.	
2009/0059201	A1 *	3/2009	Willner et al.	356/5.01
2009/0110267	A1	4/2009	Zakhor et al.	
2009/0115994	A1	5/2009	Stettner et al.	

2009/0142066	A1	6/2009	Leclair et al.	
2009/0237640	A1	9/2009	Krikorian et al.	
2009/0273770	A1	11/2009	Bauhahn et al.	
2009/0310118	A1	12/2009	Halldorsson	
2010/0165323	A1	7/2010	Fiess et al.	
2010/0182587	A1 *	7/2010	Fluckiger	356/4.01
2012/0044476	A1	2/2012	Earhart et al.	

FOREIGN PATENT DOCUMENTS

GB	2306828	5/1997
GB	2364840	2/2002
WO	WO 01/18563	3/2001
WO	WO 02/04982	1/2002
WO	WO 02/065155	8/2002
WO	WO 2006/130734	12/2006
WO	WO 2007/081628	7/2007
WO	WO 2009115122	A1 * 9/2009
WO	WO 2009/133414	11/2009

OTHER PUBLICATIONS

Restriction Requirement for U.S. Appl. No. 13/341,640, mailed Mar. 7, 2012, 6 pages.

International Search Report and Written Opinion for International Patent Application U.S. Appl. No. PCT/US11/46689, mailed Mar. 20, 2012, 15 pages.

International Preliminary Report on Patentability for International Patent Application Serial No. PCT/US2010/021213, mailed Aug. 4, 2011, 7 pages.

Official Action for U.S. Appl. No. 12/357,251, mailed Mar. 11, 2011, 23 pages.

Xun et al., "Expanding range of pulsed range sensors with active projection from spatial light modulators", *Spaceborne Sensors III*, Proc. of SPIE vol. 6220, 62200I, 2006, 9 pages.

Notice of Allowance and Fee(s) Due for U.S. Appl. No. 13/043,279, mailed May 16, 2012, 26 pages.

Notice of Allowance and Fee(s) Due for U.S. Appl. No. 12/647,883, mailed Jun. 22, 2012, 13 pages.

Allen et al., "Full-Scale Testing and Platform Stabilization of a Scanning Lidar System for Planetary Landing", *Space Exploration Technologies* (Wolfgang Fink, ed.), Proceedings of SPIE, vol. 6960, pp. 696004-1-696004-10 (2008).

Bakalski et al., "Real Time Processing Enables Fast 3D Imaging at Single Photon Level", *Laser Radar Technology and Applications XIII*, (Monte D. Turner, Gary W. Kamerman, ed.), Proceedings of the SPIE, vol. 6950, pp. 69500K-1-69500K-9 (2008).

Baker et al., "Advanced Infrared Detectors for Multimode Active and Passive Imaging Applications" *Infrared Technologies and Applications XXXIV* (Bjorn F. Andresen, Gabor F. Fulop, and Paul R. Norton, ed.), Proceedings of the SPIE, vol. 6940, pp. 69402L-1-69402L-11 (2008).

Brady and Schwartz, "ALHAT System Architecture and Operational Concept", Aerospace Conference, 2007 IEEE, Big Sky, MT, IEEEAC Paper # 15700, Version 4, pp. 1-13 (2007).

Cho et al., "Real-Time 3D Ladar Imaging", 35th Applied Imagery and Pattern Recognition Workshop, pp. 5 (2006).

Craig et al., "Processing 3D Flash Ladar Point-Clouds in Real-Time for Flight Applications", *Sensors and Systems for Space Applications* (Richard T. Howard and Robert D. Richards, ed.), Proceedings of SPIE, vol. 6555, pp. 65550D-1-65550D-9 (2007).

Dissly et al., "Flash LIDAR Systems for Planetary Exploration", American Astronomical Society, DPS Meeting, Presentation # 40, Ithaca, NY, Bulletin of the American Astronomical Society, vol. 41, pp. 560 (2008).

Fay et al., "Fusion of Multi-Sensor Passive and Active 3D Imagery", *Enhanced and Synthetic Vision 2001* (Jacques G. Verly, ed.), Proceedings of SPIE, vol. 4363, pp. 219-230 (2001).

Gillula, "Data Fusion From Multiple Sensors: Real-Time Mapping on an Unmanned Ground Vehicle", 2005 SURF Final Report, California Institute of Technology, 13 pgs (2005).

(56)

References Cited

OTHER PUBLICATIONS

- Habbit et al., "Utilization of Flash LADAR for Cooperative and Uncooperative Rendezvous and Capture", *Space Systems Technology and Operations* (Peter Tchoryk, Jr. and James Shoemaker, ed.), Proceedings of SPIE, vol. 5088, pp. 146-157 (2003).
- Hyde et al., "Mapping Forest Structure for Wildlife Habitat Analysis Using Multi-Sensor (LiDAR, SAR/InSAR, ETM+, Quickbird) Synergy", *Remote Sensing of Environment*, vol. 102, pp. 63-73 (2006).
- De Lafontaine et al., "LAPS: The Development of a Scanning Lidar System with GNC for Autonomous Hazard Avoidance and Precision Landing", *Spaceborne Sensors* (Robert D. Habbit, Jr. and Peter Tchoryk, Jr., ed.), Proceedings of SPIE, vol. 5418, pp. 81-93 (2004).
- Lamoreux et al., "Relative Navigation Sensor for Autonomous Rendezvous and Docking", *Laser Radar Technology and Applications VIII* (Gary W. Kamerman, ed.), Proceedings of the SPIE, vol. 5086, pp. 317-328 (2003).
- Lefsky et al., "Estimates of Forest Canopy Height and Aboveground Biomass Using ICESat", *Geophysical Research Letters*, vol. 32, L2202, 4 pages. (2005).
- Marino and Davis, Jr., "Jigsaw: A Foliage-Penetrating 3D Imaging Laser Radar System", *Lincoln Laboratory Journal*, Vol. 15, No. 1, pp. 23-36 (2005).
- Oberle and Davis, "Toward High Resolution, Ladar-Quality 3-D World Models Using Ladar-Stereo Data Integration and Fusion," *Army Research Laboratory, ARL-TR-3407*, 37 pgs (2005).
- Pack et al., "A Co-Boresighted Synchronized Ladar/EO Imager for Creating 3D Images of Dynamic Scenes", *Laser Radar Technology and Applications, X* (Gary W. Kamerman, ed.), Proceedings of SPIE, vol. 5791, pp. 42-50 (2005).
- Pierrotet et al., "Characterization of 3-D Imaging Lidar for Hazard Avoidance and Autonomous Landing on the Moon", *Laser Radar Technology and Applications XII* (Monte D. Turner and Gary W. Kamerman, ed.), Proceedings of SPIE, vol. 6550, pp. 655008-1-655008-9 (2007).
- Riris et al., "The Lunar Orbiter Laser Altimeter (LOLA) on NASA's Lunar Reconnaissance Orbiter (LRO) Mission", *Sensors and Systems for Space Applications* (Richard T. Howard and Robert D. Richards, ed.), Proceedings of SPIE, vol. 6555, pp. 655501-1-655501-8 (2007).
- Roberts, Jr. and LeVan, "Aperture Sharing Between Low-Background Infrared Sensors and Ladar Sensors", *Aerospace Applications Conference*, Proceedings of the IEEE, vol. 4, pp. 495-508 (1996).
- Smith et al., "Diffraction Optics for Moon Topography Mapping", *Micro (MEMS) and Nanotechnologies for Space Applications* (Thomas George and Zhong-Yang Cheng, ed.), Proceedings of SPIE, vol. 6223, pp. 622304-1-622304-10 (2006).
- Stentz et al., "Real-Time, Multi-Perspective Perception for Unmanned Ground Vehicles", *Proceedings of the Association for Unmanned Vehicle Systems International*, 15 pgs (2003).
- Stettner et al., "Three Dimensional Flash Ladar Focal Planes and Time Dependent Imaging" *Advanced Scientific Concepts, Inc.*, 5 pgs (Undated).
- Tan and Narayanan, "Design and Performance of a Multiwavelength Airborne Polarimetric Lidar for Vegetation Remote Sensing", *Journal of Applied Optics*, vol. 43, No. 11, pp. 2360-2368 (2004).
- Trenkle et al., "3D Sensor Algorithms for Spacecraft Pose Determination", *Spaceborne Sensors III* (Richard T. Howard and Robert D. Richards, ed.), Proceedings of SPIE, vol. 6220, pp. 62200D-1-62200D-14 (2006).
- Weinberg et al., "Flash Lidar Systems for Hazard Detection, Surface Navigation and Autonomous Rendezvous and Docking", *2007 LEAG Workshop on Enabling Exploration*, 2 pgs (2007).
- Yoon et al., "High Frequency Attitude Motion of ICESat", *Advances in Astronautical Sciences* (David A. Vollado, Michael J. Gabor and Prasun N. Desai ed.), vol. 120: *Spaceflight Mechanics, Part 1*, pp. 117-131 (2005).
- Robert C. Fenton, "A LADAR-Based Pose Estimation Algorithm for Determining Relative Motion of a Spacecraft for Autonomous Rendezvous and Dock", *Master of Science thesis, Utah State University*, 90 pages (2008).
- Chen et al., "RANSAC-Based DARCS: A New Approach to Fast Automatic Registration of Partially Overlapping Range Images", *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 21, No. 11, 6 pages (Nov. 1999).
- Vasile et al., "Pose-Independent Automatic Target Detection and Recognition Using 3D Laser Radar Imagery", *Lincoln Laboratory Journal*, vol. 15, No. 1, 18 pages (2005).
- Ruel et al., "Field Testing of a 3D Automatic Target Recognition and Pose Estimation Algorithm", *Automatic Target Recognition XIV*, SPIE vol. 5426, 10 pages (2004).
- Allen et al., "Rendezvous Lidar Sensor System for Terminal Rendezvous, Capture, and Berthing to the International Space Station", *Sensors and Systems for Space Applications II*, SPIE vol. 6958, 8 pp. (2008).
- Jasiobedzki et al., "Autonomous Satellite Rendezvous and Docking Using LIDAR and Model Based Vision", *Spaceborne Sensors II*, SPIE vol. 5798, 12 pages (2005).
- Fenton et al., "Simulation Tests of a Lidar-based Spacecraft Pose Determination Algorithm", *Sensors and Systems for Space Applications*, SPIE vol. 6555, 11 pages (2007).
- Ruel et al., "Real-Time 3D Vision Solution for On-Orbit Autonomous Rendezvous & Docking", *Spaceborne Sensors III*, SPIE 6220, 11 pages (2006).
- Trenkle et al., "3-D Sensor Algorithms for Spacecraft Pose Determination", *Spaceborne Sensors III*, SPIE vol. 6220, 14 pages (2006).
- Wikipedia, "RANSAC", available at <http://en.wikipedia.org/wiki/RANSAC>, 5 pages (2009).
- Brian F. Aull et al., "Geiger-Mode Avalanche Photodiodes for Three-Dimensional Imaging", *Lincoln Laboratory Journal*, vol. 13, No. 2 (2002).
- Didier Bruneau, "Mach-Zehnder Interferometer as a Spectral Analyzer for Molecular Doppler Wind Lidar", *Applied Optics*, vol. 40, No. 3, pp. 391-399 (2001).
- Didier Bruneau and Jacques Pelon, "Simulation and Measurement of Particle Backscattering & Extinction Coefficient & Wind Velocity by Lidar with a Mach-Zehnder Interferometer: Principle of Operation & Performance Assessment", *Applied Optics*, vol. 42, No. 6, pp. 1101-1114 (2003).
- Pierre Connes and Guy Michel, "Astronomical Fourier Spectrometer", *Applied Optics*, vol. 14, No. 9, pp. 2067-2084 (1975).
- Degnan, John J., "Photon-Counting Multikilohertz Microlaser Altimeters for Airborne and Spaceborne Topographic Measurements", *Journal of Geodynamics*, vol. 34, pp. 503-549 (2002).
- T.S. Durrani and C.A. Greated, "Spectral Analysis and Cross-Correlation Techniques for Photon Counting Measurements on Fluid Flows", *Applied Optics*, vol. 14, No. 3, pp. 778-794 (1975).
- W.A. Gault, et al., "ERWIN: An E-Region Wind Interferometer", *Applied Optics*, vol. 35, No. 16, pp. 2913-2922 (1996).
- Gentry, Bruce et al., "The Tropospheric Wind Lidar Technology Experiment (TWiLiTE): An Airborne Direct Detection Doppler Lidar Instrument Development Program", available at <http://esto.nasa.gov/conferences/estc2006/papers/b8p2.pdf>.
- Pierre Jacquinot, "The Luminosity of Spectrometers with Prisms, Gratings, or Fabry-Perot Etalons", *Journal of the Optical Society of America*, vol. 44, No. 10, pp. 761-765 (1954).
- V. Nirmal Kumar and D. Narayana Rao, "Determination of the Instrument Function of a Grating Spectrometer by Using White-Light Interferometry", *Applied Optics*, vol. 36, No. 19, pp. 4535-4539 (1997).
- Lieber, Mike et al., "Development of a Validated End-to-End Model for Space-Based Lidar Systems", *Lidar Remote Sensing for Environmental Monitoring VIII* (Singh, Upendra N. ed.), Proceedings of the SPIE, vol. 6681, 66810F (2007).
- Lieber, Mike et al., "System Verification of the JMEX Mission Residual Motion Requirements with Integrated Modeling", *UV/Optical/IR Space Telescopes: Innovative Technologies and Concepts II* (MacEwen, Howard a. ed.), Proceedings of the SPIE, vol. 5899, 589901, pp. 1-12 (2005).

(56)

References Cited

OTHER PUBLICATIONS

- Lieber, Mike et al., "Integrated System Modeling for Evaluating the Coronagraph Approach to Planet Detection", *High-Contrast Imaging for Exo-Planet Detection* (Schultz, Alfred B. ed.), Proceedings of the SPIE, vol. 4860 (2002). (Abstract only).
- W.T. Mayo, Jr., "Photon Counting Processor for Laser Velocimetry", *Applied Optics*, vol. 16, No. 5, pp. 1157-1162 (1977).
- G.A. Morton, "Photon Counting", *Applied Optics*, vol. 7, No. 1, pp. 1-10 (1968).
- Rabinovich, W.S. et al., "45 Mbps Cat's Eye Modulating Retro-Reflector Link Over 7 Km", *Free-Space Laser Communications VI*, Proceedings of the SPIE, vol. 6304, pp. 63040Q (2006). (Abstract only).
- Robert L. Richardson and Peter R. Griffiths, "Design and Performance Considerations of Cat's Eye Retroreflectors for Use in Open-Path Fourier-Transform-Infrared Spectrometry", *Applied Optics*, vol. 41, No. 30, pp. 6332-6340 (2002).
- J. Ring and J.W. Schofield, "Field-Compensated Michelson Spectrometers", *Applied Optics*, vol. 11, No. 3, pp. 507-516 (1972).
- Gordon G. Shepherd et al., "WAMDII: Wide-Angle Michelson Doppler Imaging Interferometer for Spacelab", *Applied Optics*, vol. 24, No. 11, pp. 1571-1584 (1985).
- Gordon G. Shepherd et al., "WINDII—The Wind Imaging Interferometer for the Upper Atmosphere Research Satellite", *Geophys. Res. vol. 98*, No. D6, pp. 10,725-10,750 (1993).
- Vallerga, John et al., "Noiseless, High Frame Rate (>KHz), Photon Counting Arrays for Use in the Optical to the Extreme UV", University of California, Berkeley—Sciences Laboratory and University of Geneva, Switzerland, available at http://www.ssl.berkeley.edu/~mcphate/AO/ao_medipix.html (2004-present).
- Shiquang Wang, Gordon G. Sheperd, and William E. Ward, "Optimized Reflective Wide-Angle Michelson Phase-Stepping Interferometer", *Applied Optics*, vol. 39, No. 28, pp. 5147-5160, (2000).
- Grund, et al. "Enabling Characteristics of Optical Autocovariance Lidar for Global Wind and Aerosol Profiling", AGU, American Geophysical Union, Fall Meeting, San Francisco, CA (Dec. 16, 2008).
- Grund, Chris, "An Alternative Direct Detection Approach to Doppler Winds that is Independent of Aerosol Mixing Ratio and Transmitter Frequency Jitter", Space Winds Lidar Working Group, Miami, FL (Feb. 8, 2007).
- Grund, Christian et al., "Optical Autocovariance Wind Lidar and Performance from LEO", 14th Coherent Laser Radar Conference, Snowmass, CO (Jul. 7, 2007).
- Grund, Christian et al., "Supporting NOAA and NASA High-Performance Space-Based DWL Measurement Objectives with a Minimum Cost, Mass, Power, and Risk Approach Employing Optical Autocovariance Wind Lidar (OAWL)", Space Winds Lidar Working Group, Monterey, CA (Feb. 6, 2008).
- Grund, Christian, et al., Presentation Entitled "Simultaneous Profiling of Aerosol Optical Properties, Gas Chemistry, and Winds with Optical Autocovariance Lidar", 24th ILRC Conference (Jun. 23, 2008).
- Chris Grund, "Lidar Wind Profiling from Geostationary Orbit Using Imaging Optical Autocovariance Interferometry", Space Winds Lidar Working Group, Snowmass, CO (Jul. 17, 2007).
- Grund, et al., Poster and Paper Entitled "Optical Autocovariance Wind Lidar (OAWL) for Efficient Space-Based Direct-Detection High-Resolution Aerosol Backscatter Winds", International Laser Radar Conference, Boulder, CO (Jun. 24, 2008).
- Grund et al., Poster Entitled "Optical Autocovariance Wind Lidar (OAWL) for Efficient Space-Based Direct-Detection High-Resolution Aerosol Backscatter Winds", presented at the Coherent Laser Radar Conference, Jul. 2007, presented at the Working Group on Space-based Lidar Winds, Feb. 2008, and presented at the International Laser Radar Conference, Boulder, CO, Jun. 23-27, 2008, 1 page.
- Grund, Christian J., Power Point Presentation Entitled "Optical Autocovariance: Alternative Direct Detection Approach to Doppler Winds that is Independent of Aerosol Mixing Ratio and Transmitter Frequency Jitter", presented at the Working Group Conference on Space-Based Lidar Winds, Feb. 6-9, 2007, 12 pages.
- Grund et al., Presentation Entitled "Optical Autocovariance Wind Lidar and Performance from LEO", presented at the Coherent Laser Radar Conference, Jul. 11, 2007, 30 pages.
- Grund et al., "Simultaneous Profiling of Aerosol Optical Properties, Gas Chemistry, and Winds with Optical Autocovariance Lidar", Paper 1 of 2 presented at the 24th International Laser Radar Conference, Jun. 23-27, 2008, 5 pages.
- Grund et al., "Optical Autocovariance Wind Lidar (OAWL) for Efficient Space-Based Direct-Detection High-Resolution Aerosol Backscatter Winds", Paper 2 of 2 presented at the 24th International Laser Radar Conference, Jun. 23-27, 2008, 5 pages.
- Kasten, et al., "Fabrication and Characterization of Individually Addressable Vertical-Cavity Surface-Emitting Laser Arrays and Integrated VCSEL/PIN Detector Arrays", *Proceedings of SPIE*, vol. 6484, 64840C, 2007.
- Aerius Photonics website, "Aerius NIR/SWIR Illuminators" product sheet, available at <http://www.aeriusphotonics.com/datasheets.html>, 2 pages (2009).
- U.S. Appl. No. 12/464,009, filed May 11, 2009.
- U.S. Appl. No. 12/357,251, filed Jan. 21, 2009.
- U.S. Appl. No. 12/647,883, filed Dec. 28, 2009.
- BMW Corporate Communications Press Release, "BMW Develops Laser Light for the Car", Sep. 1, 2011, The BMW Group, 3 pages.
- Notice of Allowance and Fee(s) Due for U.S. Appl. No. 12/390,226, mailed Dec. 17, 2010, 23 pages.
- Notice of Allowance and Fee(s) Due for U.S. Appl. No. 12/357,171, mailed Dec. 6, 2011, 32 pages.
- International Search Report and Written Opinion for International Application No. PCT/US2010/033559, mailed Jul. 6, 2010, 9 pages.
- International Preliminary Report on Patentability for International Application No. PCT/US2010/033559, mailed Nov. 24, 2011, 8 pages.
- Aull et al., "Geiger-Mode Avalanche Photodiodes for Three-Dimensional Imaging", *Lincoln Laboratory Journal*, vol. 13, No. 2 (2002).
- Boldt et al., "A Handheld Texel Camera for Acquiring Near-Instantaneous 3D Images," Conference Record of the Forty-First Asilomar Conference on Signals, Systems & Computers, Nov. 4, 2007, pp. 953-957.
- Ledebuhr et al., "Micro-Satellite Ground Test Vehicle for Proximity and Docking Operations Development," Aerospace Conference, Mar. 10-17, 2001, IEEE Proceedings, Jan. 1, 2001, vol. 5, pp. 2493-2504.
- Ruel et al., "Real-Time 3D Vision Solution for On-Orbit Autonomous Rendezvous & Docking", Spaceborne Sensors III, SPIE 6220, 11 pages (2006).
- Stettner et al., "Three Dimensional Flash Ladar Focal Planes and Time Dependent Imaging," International Symposium on Spectral Sensing Research, May 31, 2006, retrieved at www.advancedscientificconcepts.com/technology/documents/ThreeDimensionalFlashLabdarFocalPlanes-ISSSRPaper.pdf, 5 pages.
- International Search Report and Written Opinion for International Patent Application Serial No. PCT/US2010/021213, mailed Mar. 22, 2010, 8 pages.
- Official Action for U.S. Appl. No. 12/464,009, mailed Aug. 4, 2010, 25 pages.
- Response to Office Action for U.S. Appl. No. 12/464,009, filed Nov. 3, 2010, 5 pages.
- Amendment After Allowance for U.S. Appl. No. 12/464,009, filed Feb. 15, 2011, 6 pages.
- Extended European Search Report for European Patent Application No. 10775273.5, dated Oct. 4, 2012, 10 pages.
- International Preliminary Report for International (PCT) Patent Application No. PCT/US2011/046689, mailed Feb. 28, 2013, 12 pages.
- "Flash LIDAR Technology Shows Promise for Vegetation Canopy Science Measurements," NASA Earth Science and Technology Office, 2009, 2 pages.

(56)

References Cited

OTHER PUBLICATIONS

Abdalati et al., Report of the Ad-Hoc Science Definition Team for the Ice Cloud and Land Elevation Satellite-II (ICESAT-II), 2008, 69 pages.

Coyle et al., "The High Output Maximum Efficiency Resonator (HOMER) Developed for Long Life, Space-Based Altimetry," IEEE Aerospace Conference, 2006, 7 pages.

Shugart et al., "Determination of Stand Properties in Boreal and Temperate Forests Using High-Resolution Imagery," Forest Science, 2000, vol. 46, No. 4, pp. 478-486.

Weimer et al., "Seeing the Forest and the Trees: An electronically steerable flash LiDAR improves vegetation studies," Earth Imaging Journal, 2009, pp. 33-34.

Weishampel et al., "Semivariograms from a forest transect gap model compared with remotely sensed data," Journal of Vegetation Science, 1992, vol. 3, Iss. 4, pp. 521-523 (Abstract only).

Official Action for European Patent Application No. 10775273.5 dated Jun. 20, 2013, 5 pages.

Official Action for U.S. Appl. No. 13/099,118 mailed Aug. 29, 2013, 6 pages.

Notice of Allowance and Fee(s) Due for U.S. Appl. No. 12/357,251, mailed Sep. 13, 2011, 11 pages.

* cited by examiner

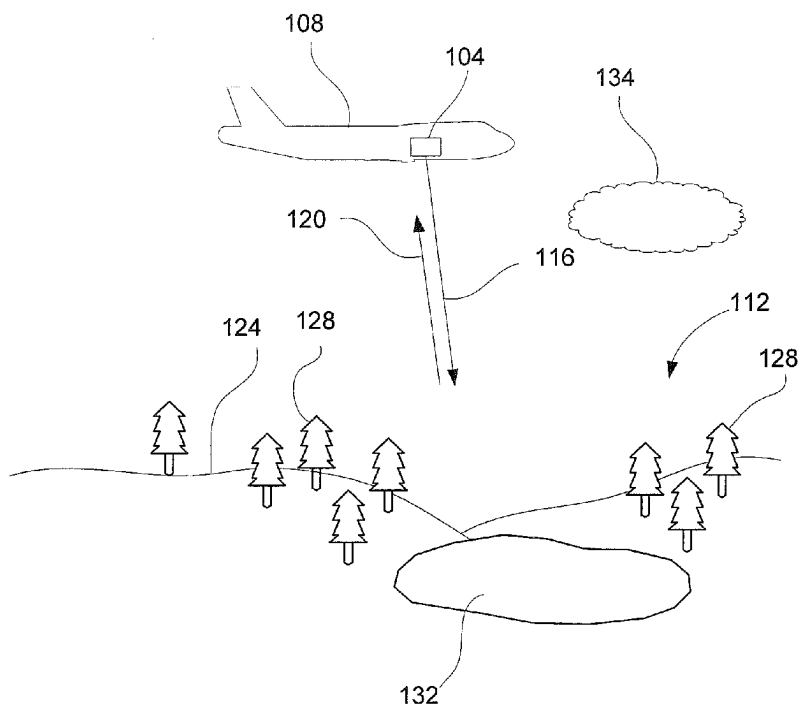


Fig. 1A

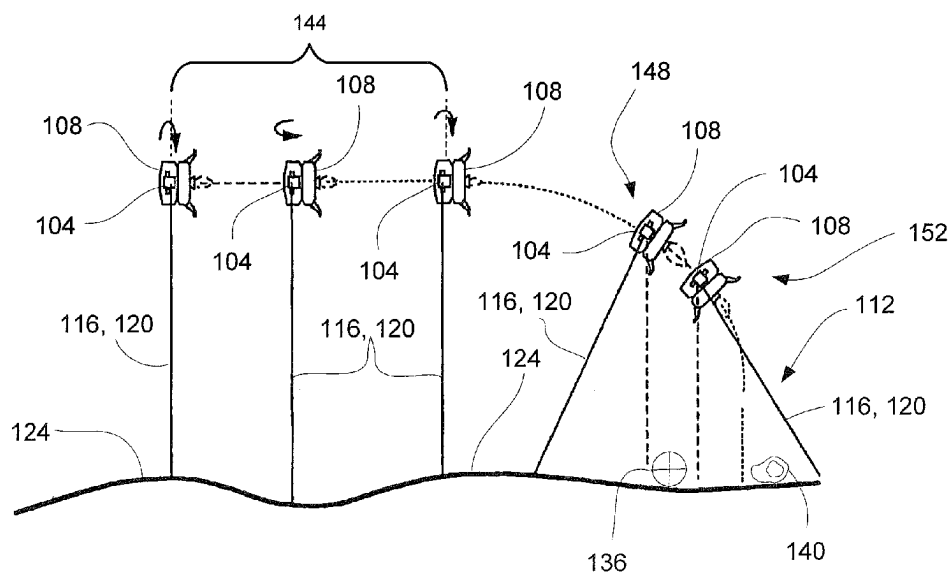


Fig. 1B

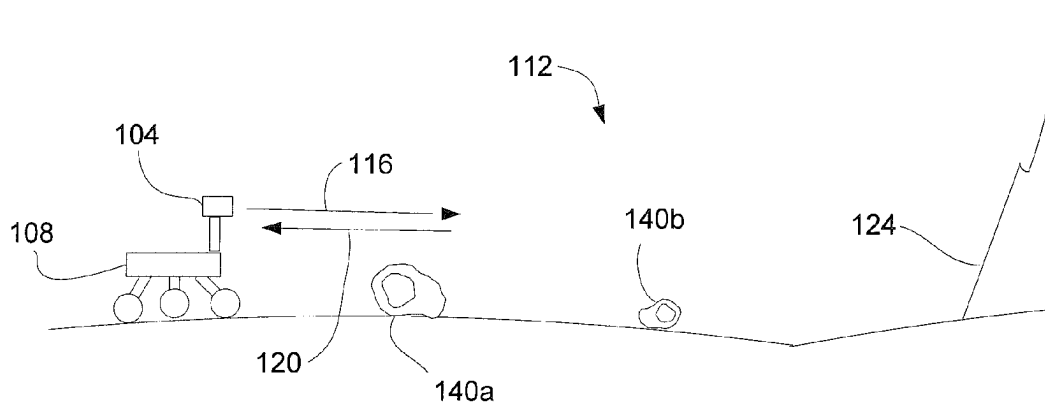


Fig.1C

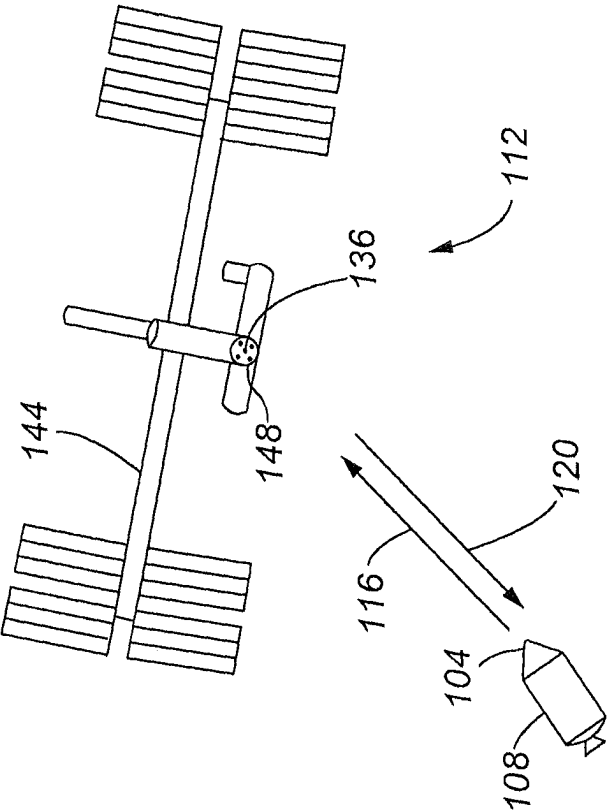


Fig. 1 D

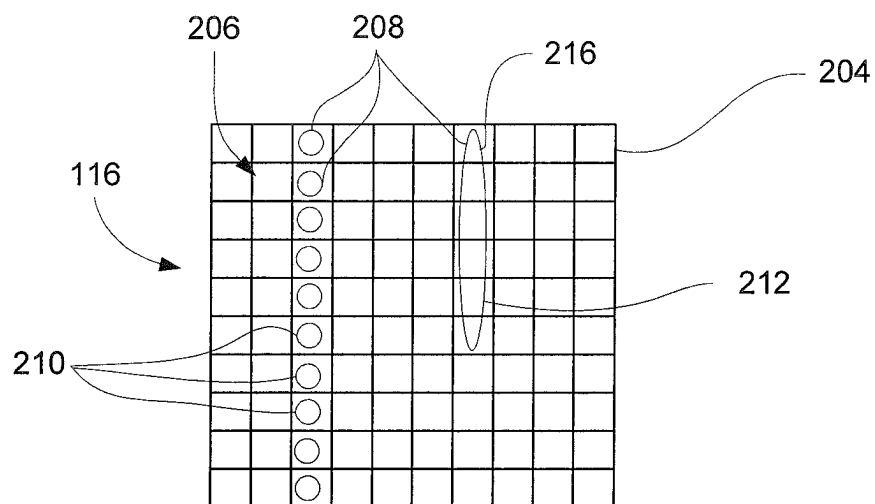


Fig. 2A

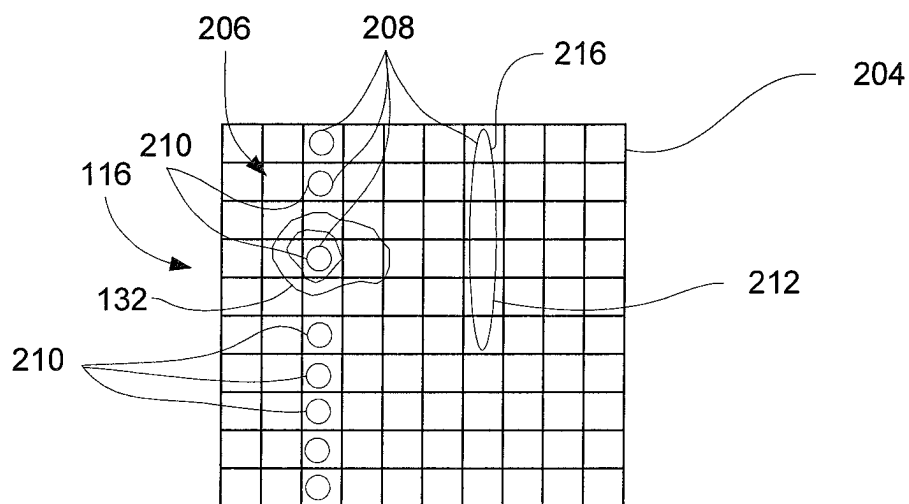


Fig. 2B

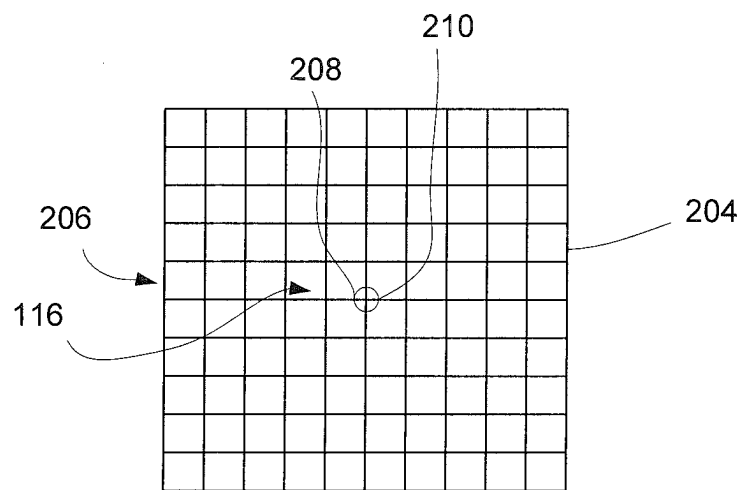


Fig. 2C

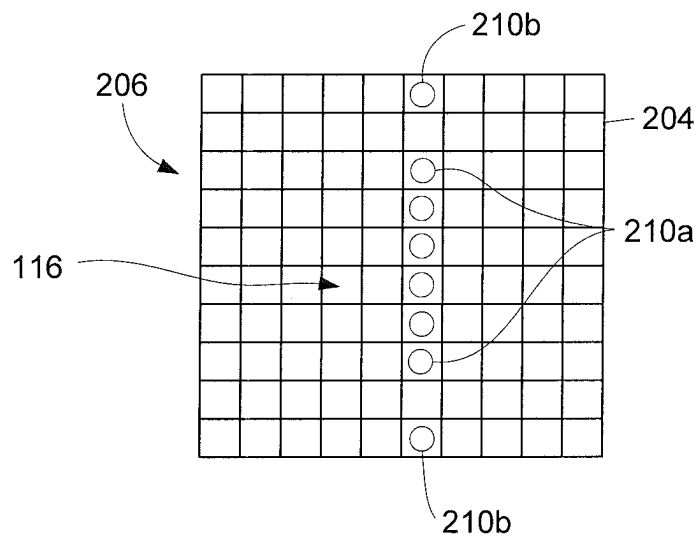


Fig. 2D

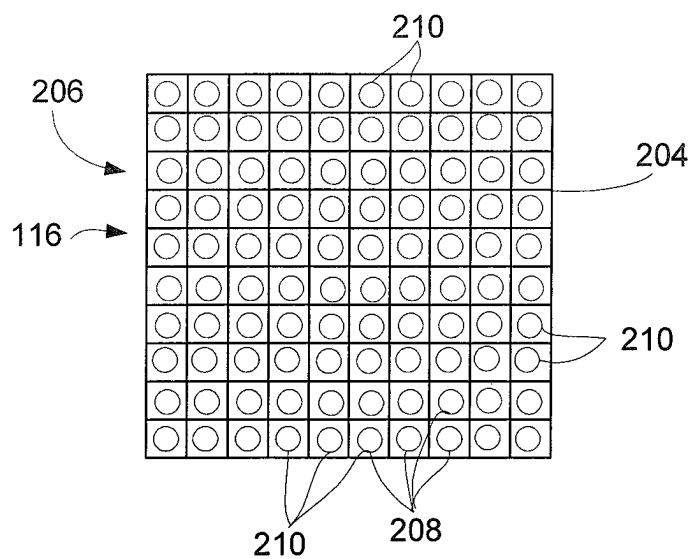


Fig. 2E

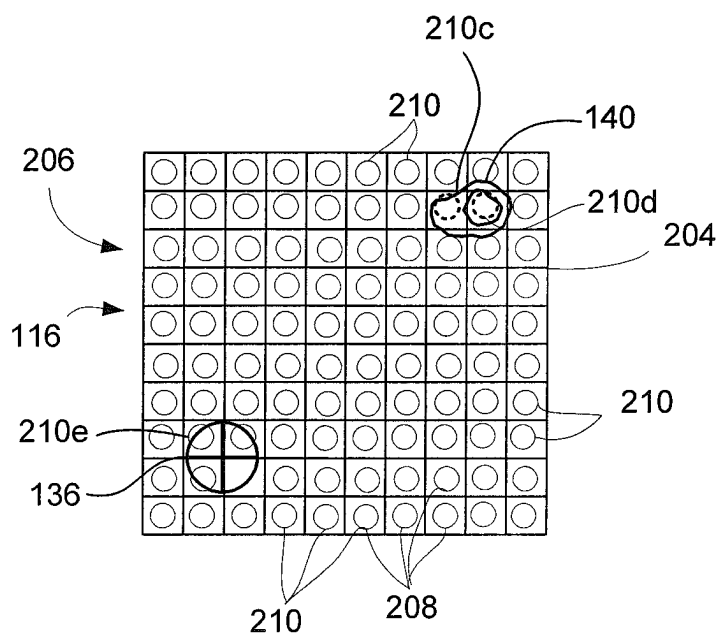


Fig. 2F

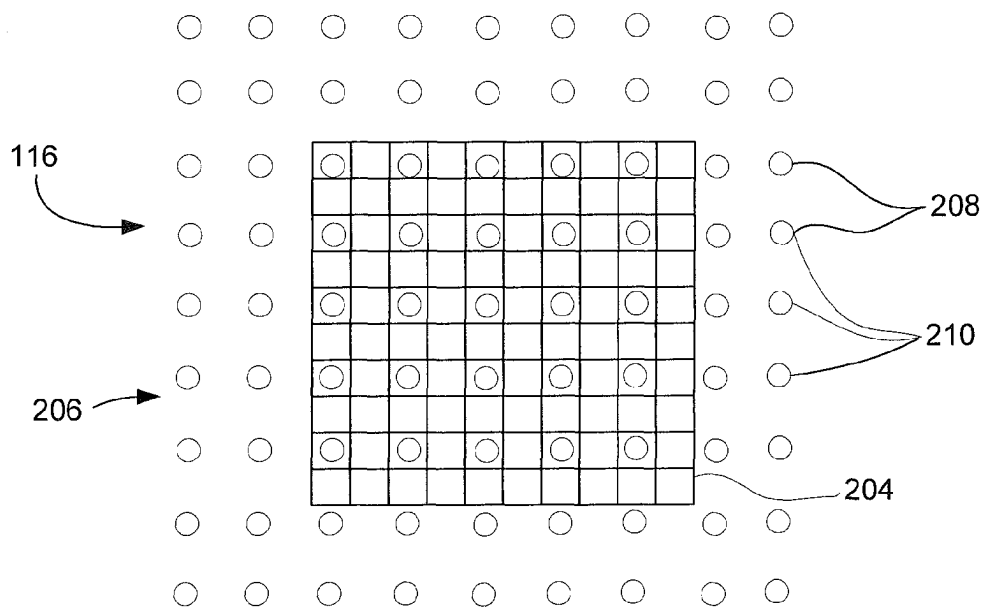


Fig. 2G

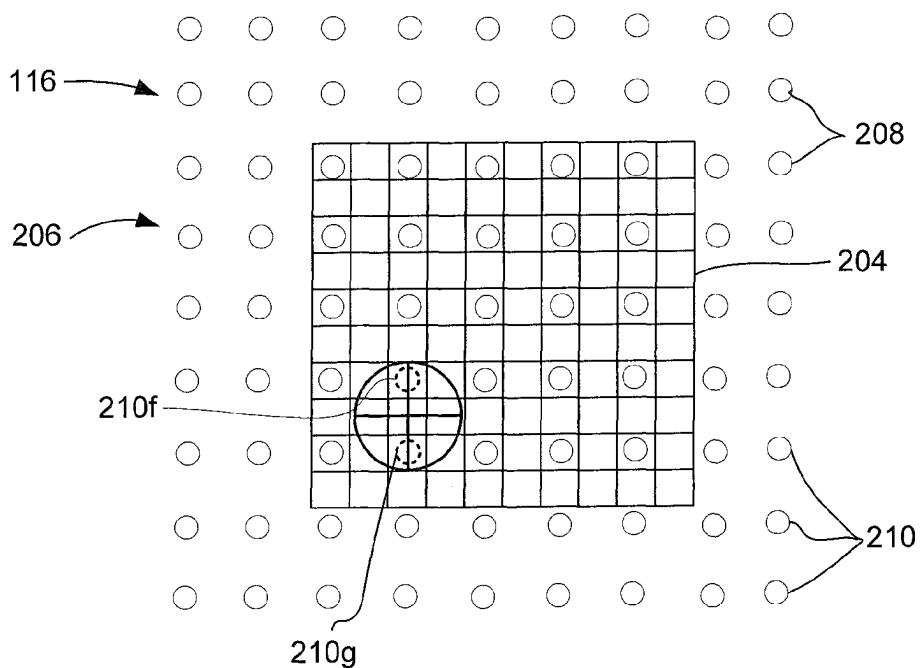


Fig. 2H

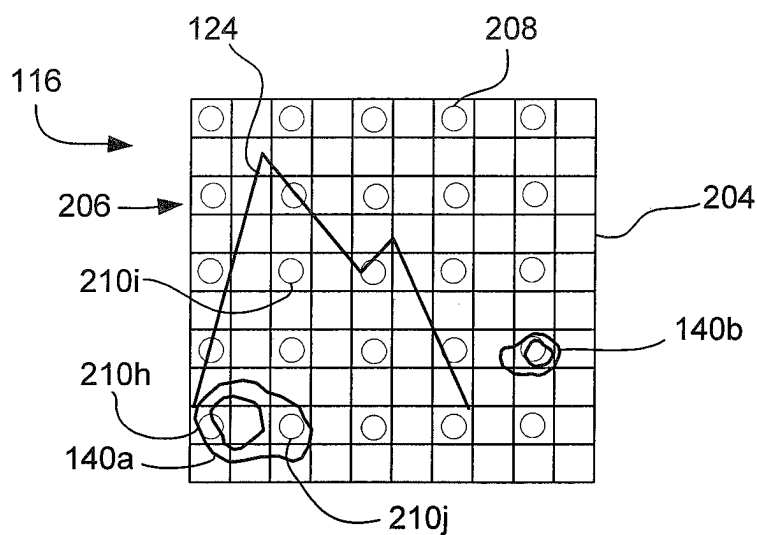


Fig. 2I

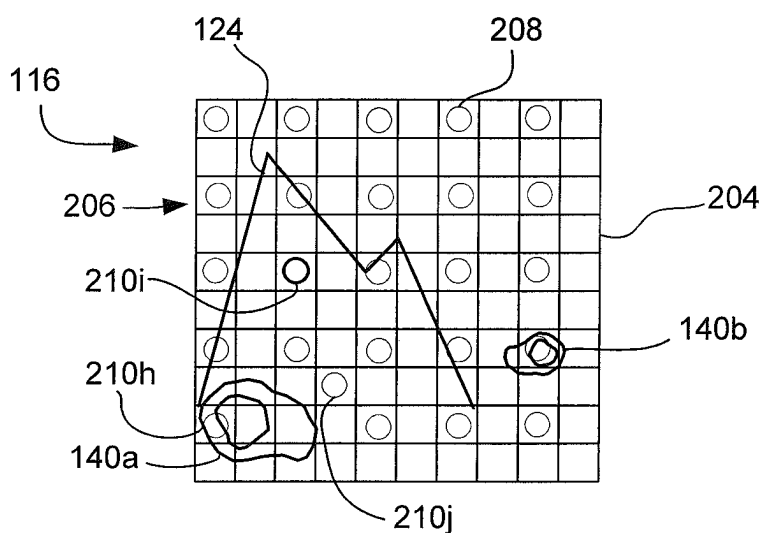


Fig. 2J

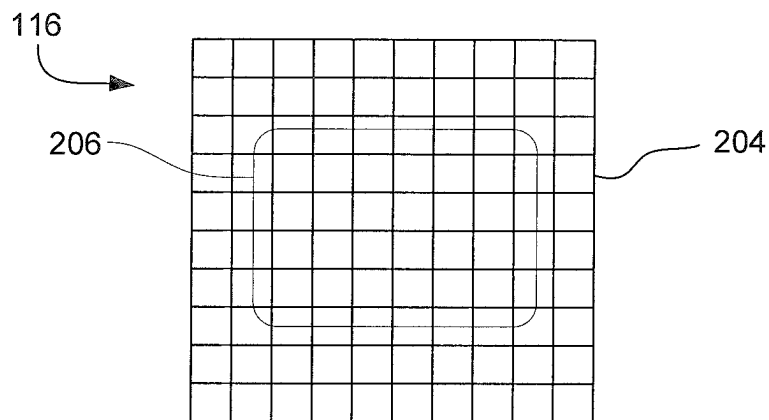


Fig. 2K

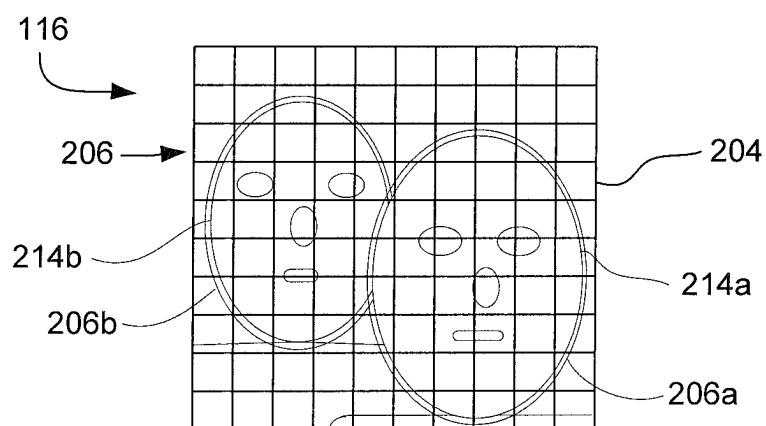


Fig. 2L

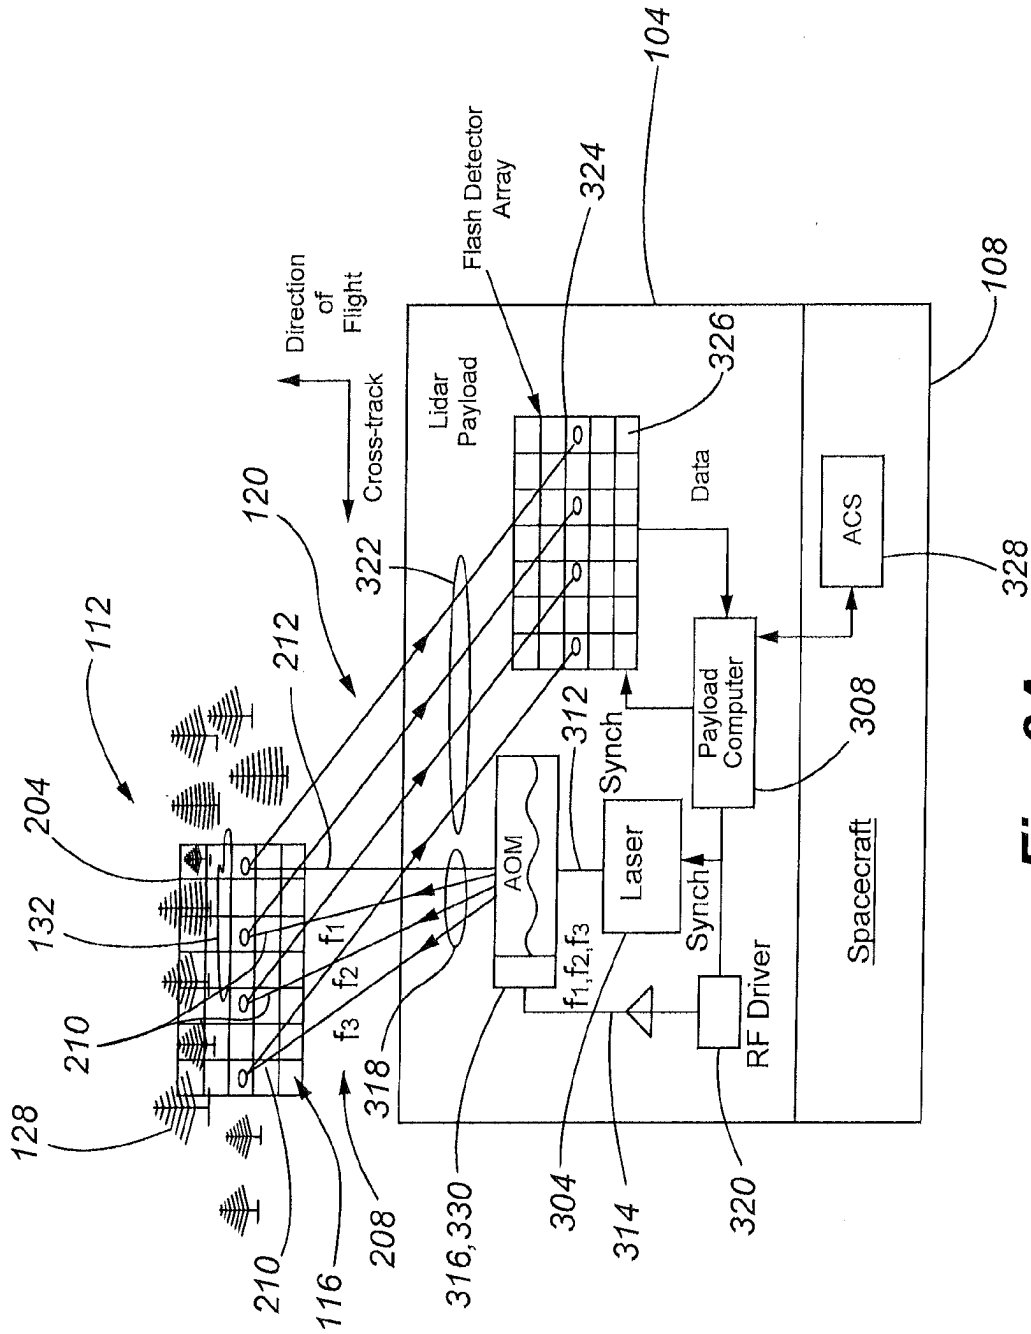


Fig. 3A

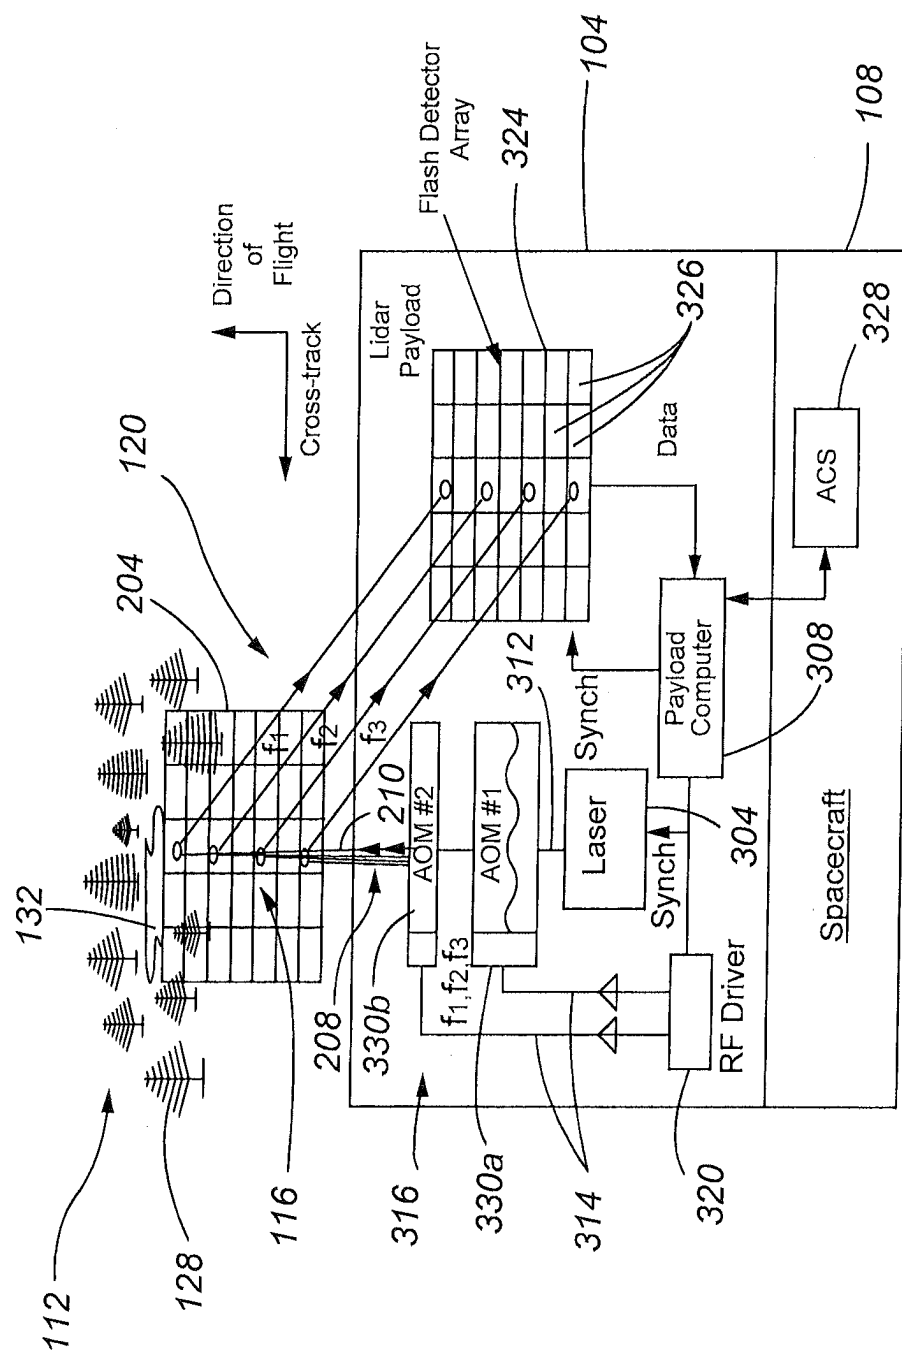


Fig. 3B

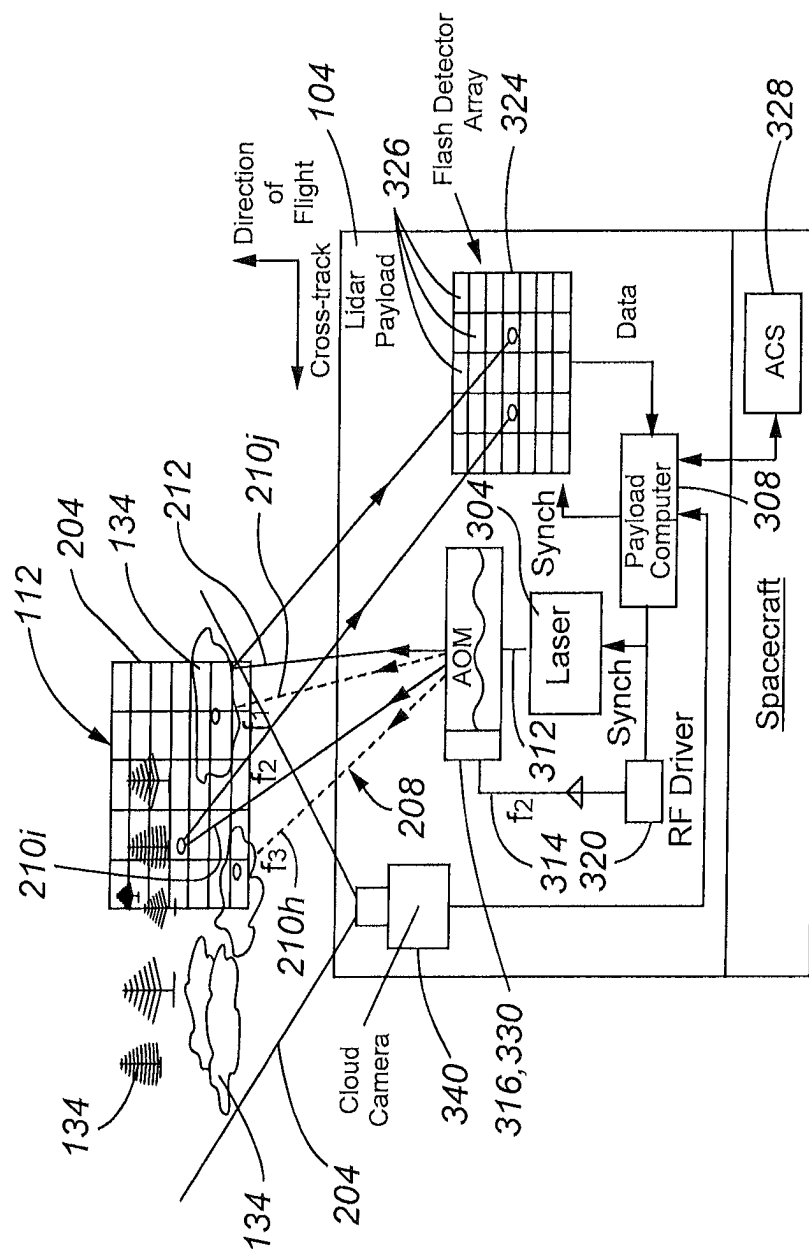
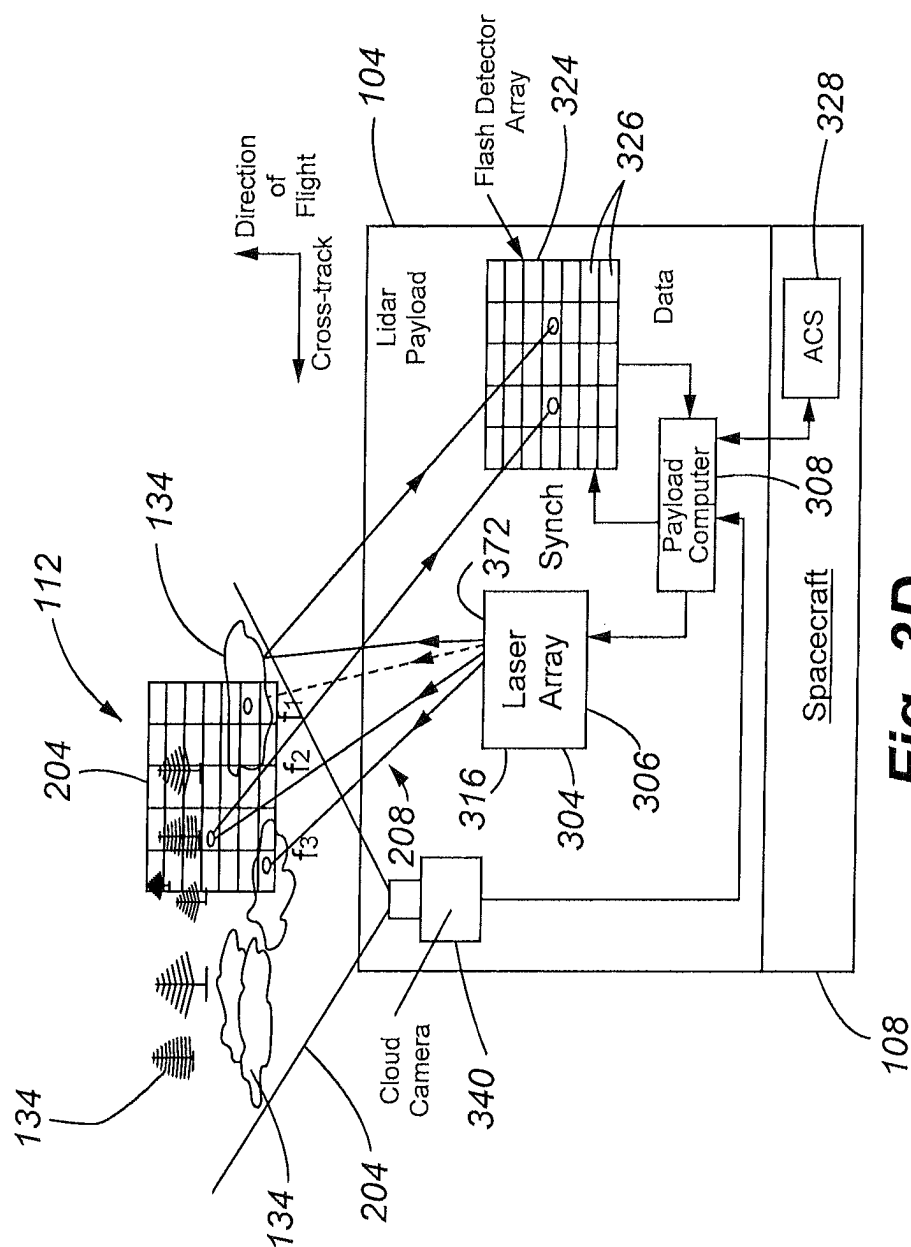


Fig. 3C



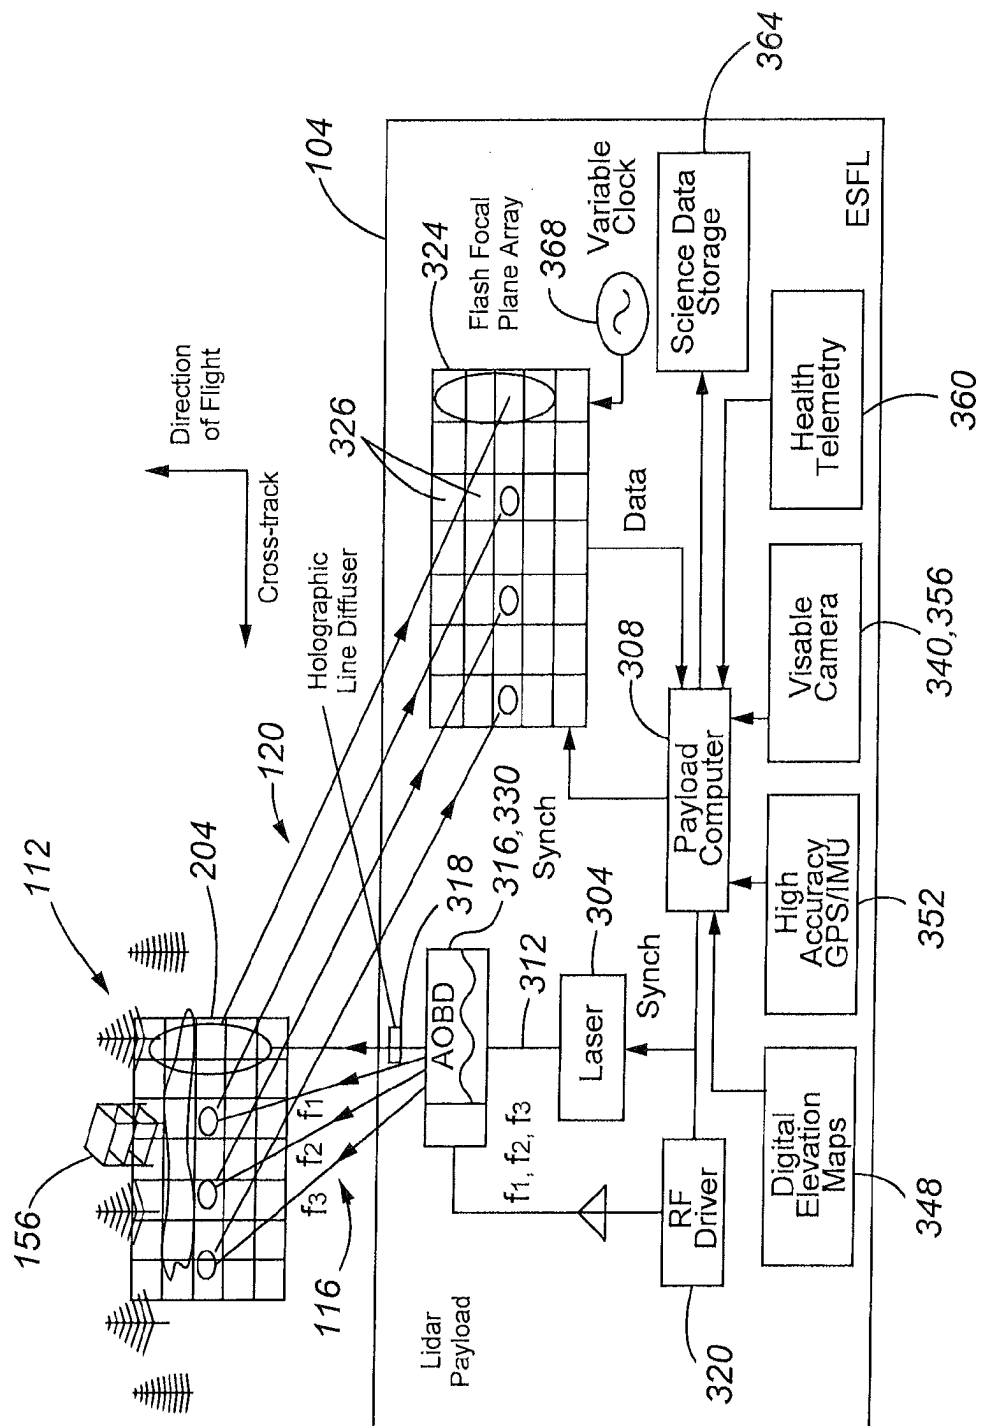


Fig. 3E


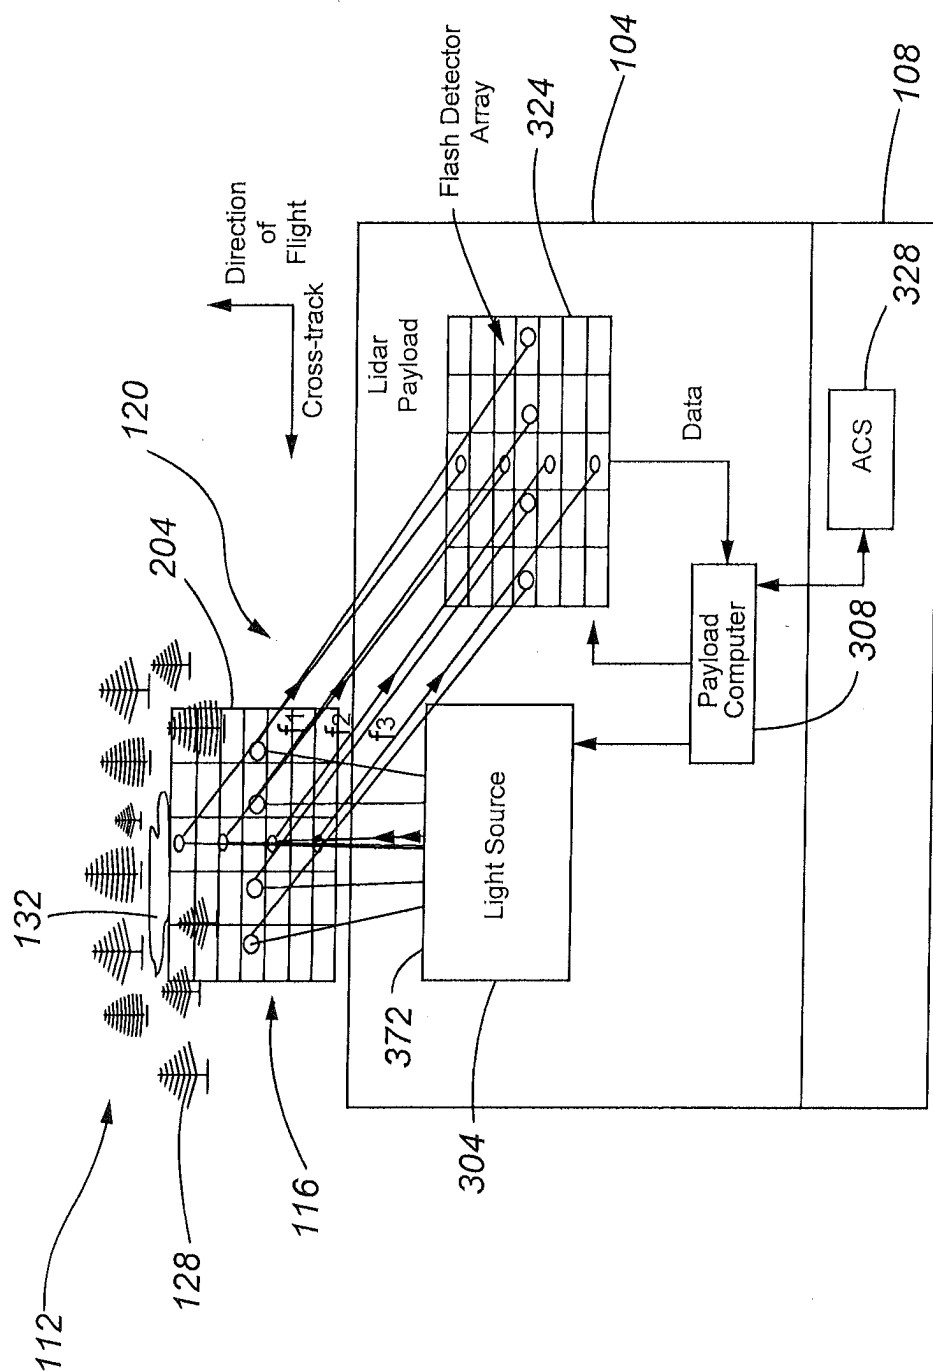


Fig. 3F

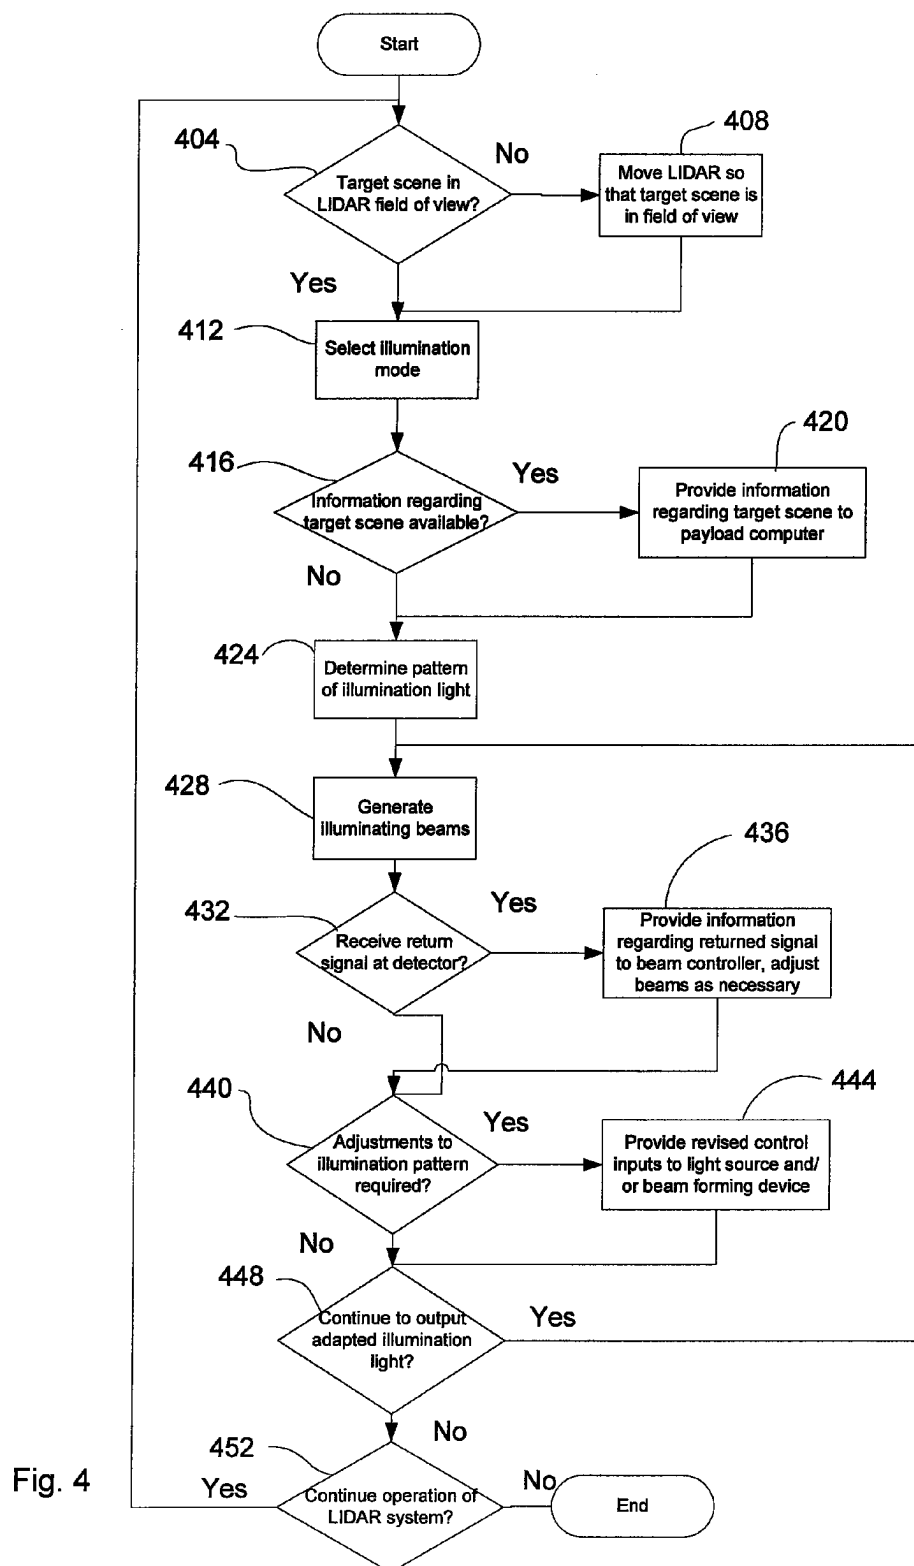

1

ELECTRONICALLY STEERED FLASH LIDAR**FIELD**

An electronically steered flash LIDAR is disclosed. More particularly, electronically steered flash LIDAR systems and methods in which illumination within a scene is adaptively controlled are provided.

BACKGROUND

LIDAR systems have been proposed for use in connection with various applications. For example, NASA and the scientific community have been working towards a space mission to characterize vegetation, specifically vegetation canopy. Data obtained from this mission would assist in trying to close the Earth's carbon budget as well as give a global baseline to vegetation health. In addition, LIDARs have been used in connection with altimetry and target identification. Other applications in space include rendezvous and docking, robotic rovers, planetary mapping, terrain relative navigation for future landers, and long range target position and range tracking.

An along track vegetation LIDAR design preferably has continuous coverage by the laser and a 25 meter footprint. For a LIDAR carried by a satellite, this drives a laser repetition rate of approximately 250 Hz. This is a relatively high repetition rate, and has a significant impact on laser reliability because of the high number of laser shots required for the mission (e.g., 10 billion). The high repetition rate also means that, in order to keep the average output power reasonable to improve laser reliability, the peak power per shot must be kept relatively low (e.g., 15 mJ). Accordingly, such a system may have insufficient power to make measurements through clouds and heavy aerosol layers.

A common issue for imaging LIDARs is that, in contrast to traditional imaging cameras, LIDARs must carry their own light source. Moreover, the performance and size/weight/power of imaging LIDARs are strongly dependent on the amount of laser light they produce. Trying to illuminate large scenes with laser light is challenging, especially at long distances. Any light that is collected and that falls below the detection threshold for a pixel is lost. Any light that misses the target is lost. This means that the laser light (photons) is of high value, and system designs must use the light as efficiently as possible.

One limitation of staring LIDARs has been their small cross track coverage. In particular, covering a large across-track swath on the ground using a staring LIDAR approach with multiple lasers is prohibitive in terms of available electrical power in space. In addition, LIDARs require that the transmitted laser spot be well within the receiver field of view over the target area. Large fields of view per detector are not desirable because a wide field of view results in the acceptance of more background light than a narrower field of view, reducing the signal to noise ratio. Within the field of view, the goal for good daytime performance has been to have the laser spot size only slightly smaller than the receiver's instantaneous field of view. This requires accurate boresighting of the LIDAR instrument. However, mechanical boresight mechanisms can be heavy and are expensive to produce and test.

In order to match laser illumination in a LIDAR to mission requirements, complex laser transmitter optics that shape or form the beam into patterns, or mechanical scanning systems, have been proposed. For example, in some mission scenarios, it may be desirable to attenuate the illumination signal, for example where a reflective target has entered the field of view

2

of the LIDAR. As another example, widening of an illumination beam may be desirable when a LIDAR system used in connection with a landing system switches from an altimetry mode to a terrain relative navigation mode, and then to a hazard avoidance mode. Accordingly, attenuation and/or diffusion devices that can be selectively switched into or out of the illumination beam have been developed. However, such mechanisms typically result in the wastage of photons in at least some configurations, and introduce elements that can be subject to mechanical failure and/or misalignment. These systems also have the effect of shifting the effective dynamic range of the overall detector, rather than broadening that dynamic range.

SUMMARY

As can be appreciated by one of skill in the art, a LADAR is a laser detection and ranging system. As can also be appreciated by one of skill in the art, a LIDAR or light detection and ranging system is essentially equivalent to a LADAR system. In particular, both LADAR and LIDAR systems use a pulsed light source to produce light that is reflected from a target to obtain range information. Moreover, the term LADAR is commonly used in connection with systems having defense applications, while the term LIDAR is commonly used in connection with civilian applications. However, in the present description, no distinction between the terms is made. Therefore, for ease of description and consistency, the term LIDAR is used throughout this description. However, it should be understood that the term LIDAR is also intended to encompass LADAR, to the extent that a distinction between the terms might otherwise be drawn.

In accordance with embodiments of the present invention, adaptive LIDAR systems and methods are provided in which the illumination of a scene is controlled. More particularly, the scene is illuminated by a number of beams. These beams can be discrete such that they illuminate separate areas of a scene, or can be combined so as to form an arbitrary beam shape. Aspects of the beams used to illuminate the scene, such as the relative intensity and angular spacing between beams, are controlled in response to feedback received from a multiple element detector or from a plurality of single element detectors. More particularly, the number of beams incident on the scene, the location within the scene on which a particular beam is incident, the intensity of the beams, and whether a beam is within an imaged area of the scene can be controlled. Moreover, in accordance with embodiments of the present invention, the beams may be controlled in a manner that allows for a variety of different beam patterns and/or illumination patterns to be produced from frame to frame. In accordance with other embodiments, the beam may be controlled in a manner that is essentially "random access", as opposed to prior systems that provide for scanning of an illuminating beam. In accordance with still other embodiments, the beam may comprise an arbitrary non-discrete beam pattern.

A LIDAR system in accordance with embodiments of the present invention may include a laser, a laser array, or other light source. Moreover, the light source may provide its output to an electronic beam steering or beam forming device. The lidar system may further include a controller that operates the laser and the beam forming device. Light emitted from the LIDAR system may be directed such that it illuminates a target scene or region. A detector comprising a multiple element or multiple pixel receiver is provided for detecting laser light reflected from the target region. As an example, the detector may comprise a focal plane array. Information regarding the intensity of light received at individual pixels of

3

the focal plane array can be provided to the controller. In accordance with still other embodiments of the present invention, information regarding the range from the LIDAR system to elements within the scene can be determined. In response to this intensity and/or range information, the controller can function to alter one or more aspects of the light illuminating the scene. That is, the system adapts the illumination to the scene. This alteration of the light illuminating the scene can include controlling aspects of the illuminating light, such as the relative intensity and angular spacing between beams comprising the illumination light, so that different areas of the scene are illuminated differently. In accordance with still other embodiments of the present invention, a light source other than a laser can be used to illuminate the scene. In accordance with further embodiments of the present invention, a range determination need not be part of the operation of the system. Instead, embodiments of the present invention can adapt illumination light based on the intensity of the collected light on each pixel without also obtaining range information.

Methods in accordance with embodiments of the present invention include illuminating a scene with illumination light comprising one or more controlled beams of light. The method further includes detecting light reflected from the illuminated scene using a multiple pixel detector. Based on information regarding the intensity of the signal returned to different pixels of the multiple pixel detector, characteristics of the light used to illuminate the scene are changed. More particularly, the light used to illuminate the scene can be varied from frame to frame so that different areas within the scene are provided with different levels of illumination. In accordance with further embodiments of the present invention, characteristics such as the number, location, and intensity of beams incident on the scene can be varied from frame to frame.

Additional features and advantages of embodiments of the present invention will become more readily apparent from the following description, particularly when taken together with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A-1D depict flash LIDAR systems in accordance with embodiments of the present invention, in exemplary operating environments;

FIGS. 2A-2L depict exemplary illumination patterns in accordance with embodiments of the present invention;

FIGS. 3A-3F depict components of LIDAR systems in accordance with embodiments of the present invention; and

FIG. 4 depicts aspects of the operation of a LIDAR system in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

FIG. 1A illustrates an illumination system or a LIDAR system **104** in accordance with embodiments of the present invention in an exemplary operating environment. Although the illumination system **104** is generally referred to herein as a LIDAR system **104**, at least some embodiments of the present invention provide selective illumination of a scene, without providing range information. Therefore, it should be appreciated that not all embodiments of the disclosed invention require that the illumination system **104** comprise a LIDAR system. Moreover, although at least some embodiments include a flash type LIDAR system **104**, not all embodiments of the disclosed invention require the collection of image information, or the inclusion of an imaging detector.

4

The illumination or LIDAR system **104** is mounted to a platform **108**. In this example, the platform **108** is an airplane, however, other platforms **108** may be associated with the LIDAR system **104**. Examples of other platforms include satellites, helicopters, unmanned aerial vehicles, autonomous rovers, balloons, stationary supports, or spacecraft. The platform **108** is used to place the LIDAR **104** in a location from which a survey area or target region or scene **112** is observed. More particularly, the LIDAR **104**, when in a desired position with respect to the scene **112**, is operated to output illumination light **116** to illuminate the scene **112** or portions or areas within the scene **112**. Reflected light **120** is returned from the scene **112**, and is detected by the LIDAR system **104**. Information regarding the time of flight of light is used to obtain range information. As shown in this example, a LIDAR system **104** in accordance with embodiments of the present invention may be operated to map or survey ground features **124**, vegetation canopy **128**, or other features, such as bodies of water **132**. As can be appreciated by one of skill in the art, different elements within a scene **112** will reflect the illumination light **116** differently. For example, a terrain feature **124** comprising a hillside may reflect the illumination light **116** less efficiently than the leaf of a tree included in the vegetation canopy **128**. As another example, ice, a lake, or other body of water **132** may reflect the illumination light **116** more intensely than the vegetation canopy **128**. The same can be true for different soils, minerals and regolith. In addition, if a cloud **134** intersects the illumination light **116** and/or the reflected light **120**, the intensity of the signal received at the LIDAR system **104** will be blocked or attenuated. An example illumination pattern that may be output by the LIDAR system **104** in the exemplary operating environment of FIG. 1A is illustrated in FIG. 2A. The intensity of reflected light detected also depends on the distance from the camera to the scene for non-specular surfaces. This is seen in flash cameras where the foreground saturates and the background is not observed. As described herein, the inter-scene illumination can be adjusted to compensate for these differences by measuring the intensity of the returned light.

More particularly, FIG. 2A illustrates a field of view **204** of a LIDAR system **104**, and illumination light **116** that is controlled to form an illumination pattern **206**. In this example, the illumination pattern **206** includes a plurality of beams **208**, and is representative of a pattern **206** that can be applied in connection with an along track vegetation survey, where the illumination pattern **206** shown in the figure is moved across the scene from left to right. The example pattern **206** includes ten deflected or steered beams **210** arranged in a column, and an undeflected beam **212**. In addition, this exemplary pattern **206** includes an undeflected beam **212** comprising a shaped beam **216**. Alternatively or in addition, a shaped beam **216** can be formed from one or more deflected beams **210**. As can be appreciated by one of skill in the art, the shaped beam **216** covers an area within the field of view **204** of the LIDAR system **104** corresponding to a plurality of pixels of the LIDAR system's **104** detector. In addition, individual beams **208** can be directed to cover an area corresponding to a single pixel of the detector, or multiple pixels of the detector. Moreover, individual beams do not have to look discrete on the focal plane. For example, they can blend together to form a line or other contiguous shape. In accordance with still other embodiments of the present invention, at least some of the beams **208** may comprise selectively activated or controlled beams. An example illumination pattern **206** that may be output by a LIDAR system **104** in the exemplary operating environment of FIG. 1A, that, in accordance with embodiments of the present invention, takes into account the strength

5

of the return signal received from different features within the field of view **204** of the LIDAR system **104** in response to the illumination pattern **206** of FIG. 1A is illustrated in FIG. 2B. In this example, there are two less beams **208** than in the example of FIG. 2A, to account for the intensity of a reflected signal **120** in the vicinity of a particularly reflective feature, such as a body of water **132**. Specifically, the pattern **206** of the incident light **116** output by the LIDAR system **104** has been adapted or controlled so that the number of deflected beams **210** incident on the body of water **132** in this later frame has been reduced as compared to the pattern shown in FIG. 2A.

With reference now to FIG. 1B, a LIDAR system **104** in accordance with embodiments of the present invention is illustrated in another exemplary operating environment. In this example, the platform **108** comprises a spacecraft, and more particularly, a landing craft. The LIDAR **104** is used in this scenario in a number of different modes, as the landing craft approaches a scene **112** comprising a landing zone, and as the landing craft lands within the landing zone. As can be appreciated by one of skill in the art, during different portions of the approach and landing sequence, it can be desirable to control the illumination light **116** of the LIDAR system **104** so that the illumination light **116** is used most effectively. For example, during an initial phase **144**, which for example may comprise a transfer orbit phase, it may be desirable to concentrate the illumination light **116** into a relatively small number of beams **208**, or even a single beam **208**. Doing so can increase the intensity of the individual deflected beams **210**, increasing the number of photons received from the illuminated area of the scene **112** as part of the reflected light **120**. This concentration of illumination light **116** is particularly useful when the LIDAR system **104** is at a relatively long range from the surface or other ground features **124** and when the LIDAR system **104** is operated in altimeter, terrain relative navigation, or other modes in which the LIDAR system **104** is at a relatively long range from the scene **112**, and/or in which image information is relatively unimportant. Example illumination patterns **206** that may comprise illumination light **116** output during the initial phase **144** are illustrated in FIGS. 2C and 2D.

FIG. 2C illustrates an illumination pattern **206** that is particularly useful when the LIDAR system **104** is at a relatively long range from the surface **124**. In this configuration, the illumination light **116** may comprise a single deflected beam **210** within the field of view **204** of the LIDAR system **104**. The single deflected beam **210** can spread over an area corresponding to one or multiple pixels of the detector. In FIG. 2D, the illumination light **116** is in a pattern **206** that includes beams **208** arranged in an across track pattern. These beams **208** can comprise deflected or steered beams **210**. More particularly, the pattern **206** in this example includes a plurality of closely spaced deflected beams **210a** in an across track configuration to form an essentially contiguous area of coverage at the center of the pattern **206**, and with non-contiguous or spaced apart deflected beams **210b** on either side of the center of the pattern. These types of patterns could be used to efficiently perform terrain relative navigation.

With reference again to FIG. 1B, during an approach phase **148**, imaging information may become relatively more important. In accordance with embodiments of the present invention, the illumination light **116** desirably covers relatively more of the field of view of the LIDAR system **104**. Accordingly, the illumination light **116** may be controlled such that the illumination light **116** is distributed about the field of view of the LIDAR system **104**. As can be appreciated by one of skill in the art, certain objects within the field of

6

view of a LIDAR system **104** may be more reflective than others. For example, a target scene **112** comprising a landing zone or a docking assembly might be associated with reflective targets **136** that have been placed to assist the LIDAR system **104**, human observers, and/or other systems in determining the position of the platform **108** relative to the target scene **112**. As another example, natural features, such as rocks **140**, ice, or light colored soils, may be more reflective than the surrounding terrain **124**. As a result, the reflected light **120** may include areas in which the reflected signal is so intense the pixels in the corresponding area of the LIDAR system **104** detector are saturated. Even if such areas of the LIDAR system **104** detector are not saturated, because of the relative efficiency with which more reflective objects **136**, **140** return light to the LIDAR system **104**, the intensity of the illumination light **116** in areas of the scene **112** corresponding to such objects **136**, **140** could usefully be decreased. Moreover, for LIDAR systems **104** utilizing deflected beams **210**, decreasing the illumination light **116** in such areas allows the illumination light **116** to be redeployed to other areas within the scene **112**. Alternatively or in addition, decreasing the illumination light **116** in at least some areas of a scene **112** can result in a decrease in the power required to produce the illumination light **116**, and/or can allow the intensity of beams **208** incident on other areas of the scene **112** to be increased. An exemplary illumination pattern **206** of illumination light **116** applicable during an approach phase is illustrated in FIG. 2E. An exemplary illumination pattern **206** during an approach phase, with modifications to reduce the illumination of reflective features **136**, **140**, is illustrated in FIG. 2F.

More particularly, in FIG. 2E, the illumination light **116** features deflected beams **210** that are evenly distributed about the field of view **204** of the LIDAR system **104**. Accordingly, the LIDAR system **104** may operate as an imaging type LIDAR system **104**. In FIG. 2F, deflected beams **210c** and **210d** are attenuated as compared to the other beams **208** of the illumination pattern **206**, to account for the greater reflectivity of the rock **140** in the area of the field of view **204** illuminated by deflected beams **210c** and **210d**. In accordance with embodiments of the present invention in which an acoustic-optic modulator is used to form the illumination pattern **216**, attenuation of beams **210** can be accomplished by supplying reduced radio-frequency energy associated with the steering of the attenuated beams **210** as compared to non-attenuated beams **210**, as described elsewhere herein. In the area of the field of view **204** corresponding to the target **136**, only one deflected beam **210e** is incident on the target **136**, while the beam that would otherwise fall in the opposite quadrant of the target **136** according to the illumination pattern **116** has been turned off, to account for the intensity of the light reflected by the target **136**.

With reference again to FIG. 1B, during a terminal phase **152**, the illumination light **116** may need to be attenuated generally, in order to avoid saturating the LIDAR system **104** detector. In accordance with embodiments of the present invention, this can be achieved by steering individual beams provided as illumination light **116** to areas outside of the field of view of the LIDAR system **104**. Alternatively or in addition, at least some of the beams **208** comprising the illumination light **116** can be turned off, and/or the intensity of at least some of the beams **208** comprising the illumination light **116** can be attenuated or reduced. An exemplary illumination pattern **206** that may be used in a terminal phase **152** of a landing or docking scenario is illustrated in FIG. 2G. An exemplary illumination pattern **206** during a terminal phase

7

152, with attenuation of deflected beams 210 in areas corresponding to reflective targets 136 and 140 is illustrated in FIG. 2H.

In particular, in FIG. 2G, the pattern illumination 206 features deflected beams 210 that have been spaced so that at least some of the deflected beams 210 fall outside of the field of view 204 of the LIDAR system 104. Accordingly, less of the illumination light 116 is received as reflected light 120 at the detector of the LIDAR system 104. In FIG. 2H, the illumination light 116 includes deflected beams 210f and 210g that are attenuated as compared to other beams in the illumination pattern. The attenuated deflected beams 210f and 210g correspond to an area occupied by a reflective target 136. Accordingly, by attenuating those deflected beams 210, the intensity of the return signal received at the detector of the LIDAR system 104 is reduced.

FIG. 1C illustrates a LIDAR system 104 in accordance with embodiments of the present invention in yet another exemplary operating environment. More particularly, in this example, the platform 108 comprises an autonomous rover. The scene 112 encountered by the LIDAR system 104 in this example includes a rock 140a in relatively close proximity to the LIDAR system 104, a rock 140b in the middle distance, and a terrain feature 124, in this example a cliff, in the background. In this scenario, illumination light 116 may be reflected most strongly by the nearest rock 140a, resulting in saturation of detector pixels in the area within the field of view of the LIDAR system 104 corresponding to the first rock 140a. Light 120 reflected from the second rock 140b may be within the dynamic range of the LIDAR system 104 detector. At least some of the light 120 reflected from the cliff 124 may be within the dynamic range of the LIDAR system 104 detector. Accordingly, a LIDAR system 104 in accordance with embodiments of the present invention can use range information to adapt the illumination light 116 produced by the LIDAR system 104 to a particular scene 112. More particularly, nearby objects can be illuminated at lower intensities and/or with a smaller number of beams than objects at relatively long range. In the example of FIG. 1C, this can include reducing the intensity and/or the number of beams incident on the first rock 140a, and increasing the intensity and/or the number of beams incident on the cliff 124.

FIG. 2I illustrates illumination light 116 in an initial or interrogation pattern 206 incident on the scene 112 depicted in FIG. 1C. From the range information obtained by the interrogation signal or pattern 206, adjustments to the effective intensity of the light 116 used to illuminate the scene 112 can be made. In particular, as illustrated in FIG. 2J, beam 210h, incident on the near rock 140a, has an intensity that is decreased as compared to the corresponding beam 210h in the interrogation signal. Beam 210i, incident on the cliff 124, has an intensity that is increased as compared to the intensity of the corresponding beam 210i in the interrogation signal. In addition, beam 210j, which was incident on the near rock 140a in the interrogation signal (see FIG. 2I) has been steered such that in the adapted illumination light 116, the beam 210j is incident on the cliff in the adapted pattern shown in FIG. 2J. Although the adaptation made to the illumination light 116 illustrated in FIGS. 2I and 2J features changes to both the intensity and the number of beams used to illuminate particular features within a scene 112, it should be appreciated that adaptation of illumination light 116 in accordance with embodiments of the present invention can utilize changes in intensity, location and/or total number of beams.

FIG. 2K illustrates illumination light 116 configured in a non-discrete illumination pattern 206. In this example, the illumination light 116 is distributed across an illumination

8

pattern 206 comprising a substantially rectangular area. Moreover, the intensity of the illumination light 116 is the same or approximately the same across the entire pattern 206. The illumination pattern 206 illustrated in FIG. 2K can comprise an interrogation signal or pattern 206, or can comprise a pattern 206 used to obtain information about an imaged scene.

In FIG. 2L, an example of a non-discrete illumination pattern 206 is illustrated, with different areas of the imaged scene 112 provided with different intensities of illumination light 116. More particularly, the scene 112 in this example comprises a portrait of two people, with a first person 214a closer to the imaging system 104 than the second person 214b. The illumination light 116 is disposed in a pattern 206 that includes a first area 206a, generally corresponding to the face of the first person 214a in the scene 112, and a second portion 206b in an area of the imaged scene 112 generally corresponding to the face of the second person 214b. Moreover, because the first person 214a is closer to the imaging system 104 than the second person 214b, the first area of illumination 206a is of lower intensity than the second area of illumination 206b. Accordingly, non-discrete illumination patterns 216 can include areas having different illumination intensities. The illumination pattern 206 in FIG. 2L is an example of a pattern that might be produced by an imaging system 104 in response to information about a scene obtained using an interrogation signal and/or a previous or earlier frame or instance of illumination light 116.

A LIDAR system 104 can also be used in connection with docking to the international space station or other spacecraft. FIG. 1D illustrates a LIDAR system 104 in accordance with embodiments of the present invention in an example rendezvous and docking scenario. The LIDAR system 104 is carried by a platform 108 comprising a spacecraft. The target scene 112 in this example comprises the international space station (ISS) 144. The LIDAR system 104 can initially produce illumination light 116 as part of a long range search. In the long range search mode, the illumination light 116 may be distributed in an illumination pattern 206, like that illustrated in FIG. 2E, where light is distributed across the field of view 204 of the LIDAR system 104. Once the ISS 144 is located, the beam pattern 206 can be adjusted to match the observed size of the ISS 144. Moreover, as the spacecraft 108 approaches the ISS 144, the illumination pattern 206 can be adopted to match retroreflectors 136 located on the ISS 144, for example in the vicinity of the docking port 148, or to match non-cooperative targets.

In FIG. 3A, components of a LIDAR system 104 carried by a platform 108 comprising a spacecraft are illustrated. In general, the LIDAR system 104 includes a light source 304 operated in response to signals received from a payload computer or controller 308. The light source 304, which may comprise a laser providing coherent light, produces a primary beam 312 that is input to an electronic beam forming or steering device 316. Operation of the beam forming device 316 may be in response to control signals received from the payload computer 308, directly or via a driver circuit or chip 320. The LIDAR system 104 also includes a detector 324, which typically comprises a multiple element or multiple pixel detector 324. Accordingly, the LIDAR system 104 may comprise a flash or imaging LIDAR system 104 with a two-dimensional detector array. In accordance with other embodiments, the detector 324 may alternatively comprise a one-dimensional detector array or a single element detector. The detector 324 is operated under the control of the payload computer 308, and data collected by the detector 324 may be provided to the payload computer 308. For example, a mul-

9

multiple pixel detector **324** may feature a plurality of pixels **326** arranged in a two-dimensional array with an active area that receives reflected light **120** within the field of view **204** of the LIDAR system **104**. Moreover, the multiple pixel detector may comprise a multiple pixel charge coupled device or other multiple element photon detector.

In accordance with embodiments of the present invention, the payload computer **308** may comprise high speed electronics, in the form of a programmable processor, application specific integrated circuit (ASIC), or a collection of integrated or discrete circuits and components, that generally controls operation of the LIDAR system **104**. For example, in connection with obtaining range information, the payload computer **308** can perform timing functions. Moreover, the payload controller **308** can receive intensity information from the multiple pixel detector **324**, and, as described herein, adapt the intensity of at least portions of the illumination light **116**. In accordance with still other embodiments of the present invention, the LIDAR system **104** is not required to perform a range determining function. Accordingly, a system **104** that does not perform a range determining function, or a LIDAR system **104** that is operated in a two-dimensional mode, does not need to perform the timing functions required of a LIDAR system **104** that is operating in a three-dimensional mode or that is otherwise collecting range information.

In accordance with embodiments of the present invention, the light source **304** comprises a laser. Moreover, the light source **304** can comprise a pulsed laser, or a continuous wave laser. In accordance with still other embodiments, the light source **304** can comprise a single laser or an array including multiple lasers. An example of a light source **304** comprising an array includes a vertical cavity surface emitting laser (VCSEL) configured to provide an array of lasers. In accordance with still other embodiments, a laser array, whether comprising a VCSEL or otherwise, can include emitters that can be independently controlled. Moreover, a light source **304** can comprise an array of fiber coupled lasers. In accordance with still other embodiments, the light source **304** need not comprise a laser. For example, and without limitation, the light source can comprise a light emitting diode (LED), an LED array, one or more incandescent sources, or one or more electronic flashtubes.

The spacecraft **108** can include an attitude control system **328**. In addition to controlling the orientation and/or location of the spacecraft, the attitude control system **328** can provide the payload computer **308** with information regarding the location of the LIDAR system **104**. In addition, the LIDAR system **104** can operate to provide the attitude control system **328** with location information, for example information regarding the location of the platform **108** relative to a target scene **112**.

The LIDAR system **104** generally operates the beam forming device **316** to illuminate a scene **112** with illumination light **116**. More particularly, the beam forming device **316** may be operated to deflect or steer one or more beams **208** of illumination light **116**. Moreover, the beam forming device **316** may be operated to control the number of beams (or beamlets) **208** comprising the illumination light **116**, the angle at which each beam **208** exits the LIDAR system **104**, and the intensity of each beam **208**. In accordance with embodiments of the present invention, this control may be accomplished by creating and controlling beams **208** comprising deflected beams **210** using the beam forming device **316**. In accordance with embodiments of the present invention comprising an array type light source **304**, a beam forming device **316** need not be included, as individual beams **208**

10

within an illumination pattern **206** can be controlled by controlling the output from elements of the array.

The LIDAR system **104** may additionally include transmit optics **318** and/or receive optics **322**. For example, transmit optics **318** may include optics for controlling or shaping one or more of the beams **208** output by the LIDAR system **104**. As an example, transmit optics **318** comprising a lens or lens system operable to disperse the light from one of the beams **208**, such as a primary or undeflected beam **212**, so that it illuminates an area within the field of view **204** of the LIDAR system **104** corresponding to a plurality of pixels **326** of the multiple pixel detector **324** can be provided. As can be appreciated by one of skill in the art, receive optics **322** may be configured to focus light returned to the LIDAR system **104**, including reflected light **120**, onto the multiple pixel detector **324**.

The LIDAR system illustrated in FIG. 3A is shown with a single beam forming device **316**. More particularly, the beam forming device **316** comprises an acousto-optic modulator (AOM) beam deflector **330**. By providing a single AOM beam deflector **330** as a beam forming device **316**, a plurality of deflected beams **210** can be formed at different angles with respect to an input beam **312**. More particularly, as can be appreciated by one of skill in the art, by providing input signals from a driver circuit **320** comprising a radio frequency driver at different frequencies, the AOM beam deflector **330** can output different deflected beams **210** at different angles with respect to the input beam **312**. Specifically, the angle at which a deflected beam **210** thus formed is output is determined by the particular frequency applied by the RF driver **320** as an input signal **314** to the acousto-optic modulator, and the number of deflected beams **210** formed is generally equal to the number of different frequencies included in the input signal **314**. In addition, the intensity of individual deflected beams **210** can be controlled by controlling the intensity of the corresponding input signal **314**, and without requiring modulation of the input beam's **312** power. The resulting one or more beams **208** produced from providing an input beam **312** and one or more input frequencies to the AOM beam deflector **330** therefore include one or more steered beams **210** that each have an angle with respect to the input beam **312** that is determined by the frequency of their corresponding input signal and an intensity that is at least partially determined by the intensity of their input signal, and an undeflected beam **212**.

FIG. 3B illustrates components of a LIDAR system **104** in accordance with further embodiments of the present invention. In this example, a beam forming device **316** comprising first **330a** and second **330b** acousto-optic modulators is provided. As can be appreciated by one of skill in the art, the inclusion of a second acousto-optic modulator **330b**, in series with a first acousto-optic modulator **330a**, allows deflected beams **210** formed by the LIDAR system **104** to be steered in two dimensions. Accordingly, such embodiments facilitate the production of illumination light **116** comprising a two-dimensional array of beams **208**. Moreover, this arrangement allows the pattern **206** of the deflected beams **210** included in the illumination light **116** to be selected pseudo-randomly. Moreover, the intensity and location of individual deflected beams **210** can be individually controlled.

FIG. 3C illustrates a LIDAR system **104** in accordance with still other embodiments of the present invention. In this example, the LIDAR system **104** includes a two-dimensional camera **340**. The two-dimensional camera **340**, which may comprise a conventional, visible wavelength and/or extended wavelength camera, can be used to detect obstacles within the field of view **204** of the LIDAR system **104**. For example, the

11

two-dimensional camera **340** may be used to obtain images of cloud formations **134** that at least partially obscure a view of a target scene **112** from the LIDAR system **104**. Specifically, information regarding the location of clouds **134** relative to the LIDAR system **104** can be used to select an illumination pattern **206**. For instance, as illustrated in FIG. 3C, an illumination pattern **206** that nominally includes an undeflected beam **212** and three deflected beams **210_{h-j}** can be modified such that the beams **210_h** and **210_j**, which would intersect the clouds **134** if they were generated according to the nominal illumination pattern **206**, can be turned off. As a result, the portion of the input beam **312** that would normally have been distributed between the three beams **210_{h-j}** can instead be concentrated into beam **210_i**, which can pass to the target scene **112** without being intersected by clouds **134**. As can be appreciated by one of skill in the art, where the beam forming device **316** comprises an acousto-optic modulator **330**, this can be achieved by providing an input frequency from the radio frequency driver **320** to the AOM **330** corresponding to the second beam **210_i**, and by not sending frequencies corresponding to the first **210_h** and third **210_j** beams. Similarly, the LIDAR system **104** could be used to track clouds or plumes of smoke or dust as the platform **108** passes over them. Moreover, the LIDAR itself, or a secondary LIDAR, could be used to detect the locations of clouds **134** or other obstructions for purposes of adapting the illumination pattern **206** so that the obstructions are avoided, without requiring the use of a two-dimensional camera **340**.

FIG. 3D illustrates yet another embodiment of a LIDAR system **104** in accordance with embodiments of the present invention. In such embodiments, the light source **304** and the beam forming device **316** may be provided by a laser array **306**. The laser array **306** generally includes multiple laser sources comprising beam sources **372** arranged in a one-dimensional or a two-dimensional array. The laser array **306** may be provided by beam sources **372** comprising multiple laser devices configured such that the output beams **208** of the devices are in a desired azimuth and elevation with respect to a reference plane associated with the laser array **306**. In accordance with still other embodiments, the laser array **306** may comprise a VCSEL array. In accordance with still other embodiments, the laser array **306** may comprise multiple lasers, with beams that are passed through fiber optic elements such that the beams exit the laser array **306** at a desired angle and relationship to other beams within the laser array **306**. As shown, individual beams **208** can be selectively activated to adapt the pattern **206** of illumination light **116** to the scene **112**.

FIG. 3E illustrates still another embodiment of a LIDAR system **104** in accordance with embodiments of the present invention. In such embodiments, which may, for example, be carried by a platform **108** comprising an airplane, the LIDAR system **104** includes a beam steering device **316** comprising an acousto-optic beam deflector **330**. In accordance with further embodiments, the acousto-optic beam deflector or modulator **330** can comprise a two-dimensional beam deflector to allow for the steering of deflected beams **210** in two dimensions. The LIDAR system **104** additionally includes output optics **318** comprising an engineered diffuser or a holographic line diffuser. Moreover, the output optics **318** are associated with the undeflected beam **212**, and are not associated with any of the deflected beams **210**. By applying the output optics **318** to the undeflected beam **212**, the shape of the undeflected beam **212** can be controlled. In the present example, the shape of the undeflected beam **212** is controlled so that it occupies an area corresponding to a plurality of pixels **326** at the multiple pixel detector **324**. This approach

12

has the advantage of providing across-track coverage and an enhanced along-track coverage that could reduce the repetition rate required of the laser to achieve contiguous along-track coverage. A LIDAR calibration target **156** is included in the scene **112**. Intensity and/or range information collected by the LIDAR system **104** with respect to light reflected by the calibration target **156** can be used to adjust or adapt the illumination light **116** incident on the scene.

In addition, the LIDAR system **104** may incorporate additional features and components. For example, digital elevation maps **348**, global positioning system and/or inertial motion tracker devices **352**, a two-dimensional camera **340** comprising a visible wavelength camera **356**, and a health telemetry unit **360**, the outputs of which may be provided to the payload computer **308** for use in operation of the LIDAR system **104**, can also be included. In addition, science data storage **364** may be provided to store science data output by the payload computer **308** and/or other devices. Also illustrated is a variable clock **368**, for providing clock data used in operation of the LIDAR system **104** multiple pixel detector **324**.

In FIG. 3F, yet another embodiment of a LIDAR system **104** in accordance with embodiments of the present invention is illustrated. In this example, the LIDAR system **104** includes a light source **304** that comprises a two-dimensional array of beam **208** sources **372**. In accordance with such embodiments, the payload computer **308** can control the light source **304** to actuate beam **208** sources **372** that illuminate selected areas within a scene **112**. In the example of FIG. 3F, the beam pattern **206** of the illumination light **116** includes beams **208** that are aligned with vertical and horizontal axes. The reflected light **120** is in turn received along vertical and horizontal axis of the multiple element detector **324**. Different illumination patterns **206** can be generated by selecting different beam sources **372** within the light source **304** array. For example, areas within a scene that are particularly reflective, such as a body of water **132**, can be illuminated by a lesser number of beams **208** than other areas of the scene **112**, to avoid saturation of the pixels **326** of the multiple element array **324**. In addition, the system **104** illustrated in FIG. 3F is not strictly a LIDAR system, in that there is no synchronization required between the light source **304** and the multiple pixel detector **324**. Accordingly, the embodiment illustrated in FIG. 3F does not capture range information.

With reference now to FIG. 4, aspects of the operation of a LIDAR system **104** in accordance with embodiments of the present invention are illustrated. Initially, a determination is made as to whether the desired target scene **112** is in the field of view **204** of the LIDAR system **104** (step **404**). If the target scene **112** is not within the field of view, the LIDAR **104** is moved to bring the target scene **112** into the field of view (step **408**). As can be appreciated by one of skill in the art, the determination as to whether a desired target scene **112** is within the field of view **204** of the LIDAR system **104** may be performed in connection with the data collected by the LIDAR system **104**. Alternatively or in addition, information regarding the location of the LIDAR system relative to the target scene **112** can be provided by other devices or systems, or by a human operator. For example, the LIDAR system **104** may be operated in a terrain relative navigation mode, and/or a target identification mode, to determine whether a desired target scene **112** is within the field of view **204** of the LIDAR system **104**. Therefore, the desired target scene **112** may include scenes **112** that are encountered while moving the LIDAR system **104** to a location from which a desired target scene **112** is within the field of view **204** of the LIDAR system **104**.

13

Once the (intermediate or final) target scene **112** is in view, the illumination mode for the LIDAR system **104** is selected (step **412**). For example, where the LIDAR system **104** is being moved towards a final target scene **112**, a concentrated line or spot illumination pattern **206** may be selected to provide terrain relative navigation information and/or long range altitude information. As another example, as the LIDAR system **104** is moved along a track, an along track illumination pattern or a cross-track illumination pattern may be selected. As still another example, when a desired terminal target scene **112** is in the field of view **204** of the LIDAR system **104**, such as in a landing or docking scenario, the illumination pattern may be switched to an imaging mode, such that a two-dimensional array of beams **208** is produced. The size of the array can be matched to the size of the scene to prevent light from missing the scene and being lost.

At step **416**, a determination is made as to whether information regarding the target scene **112** is available. If information regarding the target scene **112** is available, that information is provided to the payload computer **308**, and can be used to modify a selected or default illumination pattern **206** that would otherwise be applied for the selected illumination mode (step **420**). Examples of information regarding the target scene **112** that can be used in modifying an illumination pattern **206** include the presence and relative location of features or targets within the scene **112**, the relative reflectivity of the scene or portions of the scene **112**, areas of particular interest within the scene **112**, or other information that can be used to select an appropriate illumination pattern **206**. At step **424**, the illumination pattern **206** is determined. In particular, if information regarding the target scene **112** is available, that information is applied in combination with the selected illumination mode to determine an appropriate illumination pattern **206**. The determination of an appropriate illumination pattern can include selecting from a number of predetermined patterns **206**, for example based on the selected illumination mode, or on other available information, even if information regarding a particular target scene **112** is not available. In addition, and in particular when information regarding the specific target scene is available, selecting the illumination pattern **206** can include generating an illumination pattern **206** that is configured for application to the target scene **112**. Illuminating beams **208**, which may include deflected beams **210** and/or an undeflected beam **212**, are then generated or outputted (step **428**). In accordance with embodiments of the present invention, this initial illumination pattern **206** may comprise an interrogation pattern.

A determination may then be made as to whether a return signal **120** has been received at one or more of the pixels **326** of the multiple pixel detector **324** (step **432**). If a return signal **120** is received, information regarding the return signal **120** is provided to the payload computer **308** (step **436**). The payload computer **308** can then determine whether, based on the information received from the multiple pixel detector **324**, adjustments to the pattern **206** of the illumination signal or light **116** are desirable or required (step **440**). If it is determined that adjustments should be made, they are implemented by providing a suitable control signal to the light source **304** and/or the beam forming device **316** (step **444**). Examples of adjustments that may be made include adjustments needed to avoid saturation of one or more pixels **326** of the multiple pixel detector **324**. For instance, where a reflector **136** or a particularly reflective natural feature **132** or **140** is within the field of view **204** of the LIDAR system **104**, or is closer to the LIDAR, reflected light **120** from areas including the reflector **136** and/or feature **132**, **140** can be significantly higher than reflected light **120** from other areas of a target

14

scene **112**. Moreover, given the limited dynamic range of most multiple pixel detectors **324**, the saturation of one or more pixels **326** results in a loss of information. In addition, given the limited illumination light **116**, in accordance with embodiments of the present invention, deflected beams **210** directed to areas of the scene **112** that reflect enough light to saturate the corresponding pixels **326** of the detector **324** can be redeployed to other areas. This can be accomplished by reducing the intensity of deflected beams **210** incident on particularly reflective areas of the scene **112**, by steering the deflected beams **210** incident on particularly reflective areas to other areas of the scene **112**, and/or by turning off deflected beams **210** incident on particularly reflective areas of the scene **112**. More particularly, the payload computer **308** can direct the radio frequency driver **320** to provide input signals **314** to the beam forming device **316** to adjust the beams **208** as required.

Although examples of situations in which changes in the pattern of illuminating light **116** are made in response to receiving reflected light **120** that exceeds the dynamic range of pixels **326** of the detector **324**, adjustments can also be made where reflected light **120** is not received, at least in intensities sufficient enough to be detected. For example, where a target scene **112** is otherwise believed to be within the field of view **204** of the LIDAR system **104**, but no features have been detected, the output light **116** can be concentrated into a relatively small number of beams at relatively high intensity. In accordance with still further embodiments, a return signal from an element determined to be at a distance not corresponding to a distance to a desired target scene **112** can be used to determine the presence of a blocking element, such as a cloud **134** between the LIDAR system **104** and the target scene **112**. Such information can be in the form of a range to a target detected at a pixel **326** that is less than a known or estimated range to a desired target scene **112**. An illumination pattern **206** that avoids such blocking elements can then be output. As yet another example, only those beams **208** that are determined to provide a return signal **120** detected by the multiple pixel detector **324** may be output. In accordance with further embodiments of the present invention, information obtained by the LIDAR system **104** regarding the range to elements within an illuminated scene **112** can be used to provide information about the scene from which adaptations to the illumination pattern **206** can be made.

At step **448**, a determination may be made as to whether an adapted illumination pattern **206** is to continue to be generated or outputted. If the generation of an adapted illumination pattern **206** is to be continued, the process returns to step **428**. If the generation of an adapted illumination pattern is to be discontinued, a determination may next be made as to whether the operation of the LIDAR system **104** is to be continued (step **452**). If operation is to be continued, the process may return to step **404**. Alternatively, the process may end.

As can be appreciated by one of skill in the art from the description provided herein, embodiments of the present invention apply feedback provided by a multiple pixel detector **324** to control or adjust light **116** used to illuminate a scene **112**. Moreover, it can be appreciated that different areas within a scene **112** can be illuminated by light of different intensities. Moreover, this differential or adaptive illumination of different areas within a scene **112** can be accomplished through the selective steering of individual deflected beams **210** of light provided as output **116** to illuminate a scene **112**, and/or through the control of the intensities of individual deflected beams **210** of illuminating light **116**. In accordance with further embodiments of the present invention, this dif-

15

ferential or adaptive illumination of different areas of a scene can be achieved through the selective activation of beams **208** produced by a light source **304** comprising an array of beam **208** sources **372**. In addition, it should be appreciated that embodiments of the present invention allow for beams **208** within an illumination pattern **206** to be controlled in a random or pseudo-random access fashion. Moreover, beams **208** can be produced or controlled to produce an illumination pattern **206** comprising discrete spots. Alternatively or in addition, beams **208** can be produced or controlled to produce an illumination pattern **206** that comprises one or more contiguous areas of light.

In embodiments providing a beam forming device **316** comprising a single AOM beam deflector **330**, the angle of individual deflected beams **210**, relative to an input beam **312**, can be controlled in one dimension. Moreover, the relative intensities of the deflected beams **210** can be controlled by controlling the intensity of the input frequencies provided to the AOM beam deflector **330**. By providing a beam forming device **316** comprising first and second AOM beam deflectors **330**, the angle of deflected beams **210** relative to an input beam **312** can be controlled in two dimensions. Moreover, the relative intensities of the deflected beams **210** can be controlled. This pseudo-random access control of deflected beams **210** provided as part of illumination light **116** allows embodiments of the present invention to vary the intensity of the illumination light **116** across the field of view **204** of the LIDAR system **104**. In accordance with still other embodiments, a light source **304** comprising an array of beam **208** sources **372** can be operated to provide an illumination pattern **206** that is adapted to a particular scene. In particular, individual sources **372** can be operated in such embodiments so that a desired illumination pattern **206** is output. Accordingly, illumination light **116** can be selectively distributed, so that the reflected light **120** received at individual pixels **326** of the multiple pixel detector **324** is within the dynamic range of those pixels **326** and/or is directed to pixels **326** receiving reflected light **120** from areas within the field of view **204** of the LIDAR system **104** corresponding to areas of particular interest or importance within the target scene **112**.

In accordance with embodiments of the present invention, a LIDAR system **104** that is capable of providing range information is described. Moreover, at least some embodiments incorporate a multiple pixel detector **324** comprising a two dimensional array, enabling the acquisition of image information from a target scene in three dimensions. More particularly, frames of data can be obtained, with each frame taken at a different moment in time. Moreover, for each frame, intensity and range information can be obtained. As can be appreciated by one of skill in the art, intensity information can be obtained from the pixels **326** of the multiple pixel detector **324**, while range information can be obtained by determining a time of flight by determining the time elapsed between the production of a beam **208** of light and the time at which reflected light **120** corresponding to that beam **206** is received at a pixel **326** of the multiple pixel detector **324**. Control of beams **208** in accordance with embodiments of the present invention allows those beams **208** to be pointed towards areas of a target scene **112**, so that reflected light is received by individual pixels **326** of the multiple pixel detector **324**. Alternatively or in addition, beams **208** can be controlled so that at least portions of multiple pixels **326** correspond to areas of the target scene **112** illuminated by such beams **208**. As can be appreciated by one of skill in the art, a beam forming device **316** comprising one or more AOM beam deflectors **330** will output a single undeflected beam **212**, in addition to from 0-n deflected beams **210**, where n is equal to the maximum num-

16

ber of frequencies provided to the AOM beam deflector or deflectors **330** as an input signal **314**. In accordance with embodiments of the present invention, the undeflected beam **212** can be included in the illumination light **116** within the field of view **204** of the LIDAR system **104**. In accordance with still other embodiments, the undeflected beam **212** can be attenuated, steered, thrown out, blocked, or otherwise modified. Where the light source **304** comprises an array of beam sources **372**, the number of beams **208** included in the illumination light **116** can range from 1-m, wherein m is the total number beam sources **372**.

In accordance with still other embodiments of the present invention, range information need not be collected and/or determined. Accordingly, embodiments of the present invention are not limited to LIDAR systems. For example, a system in accordance with embodiments of the present invention can comprise any system that includes a light source **304** that, in cooperation with a beam forming device **316**, can be operated to produce multiple, independently controlled beams **208** to illuminate a scene **112** that is partially or entirely within a field of view **204** of the system. In accordance with further embodiments of the present invention, the light source **304** may comprise an array of lasers or fiber-coupled lasers with associated lenses or microlens arrays. In accordance with still other embodiments, a light source **304** can comprise a non-laser source, such as an electronic flash tube or an array of electronic flash tubes. Moreover, a non-laser light source can be associated with one or more beam forming devices **316** and/or transmit optics **318**. Moreover, a beam forming device **316** can comprise a liquid crystal display (LCD) or other panel in which areas of the panel can be controlled to selectively transmit or block light provided from a light source **304**, to produce an illumination pattern **206** having an intensity that is controlled or varied such that different areas within a scene **112** can be provided with different intensities of illumination light **116**. In accordance with further embodiments, any one of multiple degrees of transmission can be selected at different areas of the beam forming device **316**. Alternatively or in addition, the beam forming device may comprise an array of pixels that can be switched between a state of maximum transmission and a state of maximum opaqueness. In accordance with such embodiments, a beam **208** may comprise an area of an illumination pattern **206** produced by the beam forming device **316**.

Systems in accordance with embodiments of the present invention include a multiple pixel detector **324** that provides a feedback signal to a controller, such as a payload computer **308**, that is used to adjust characteristics of at least one of the beams **208** used to illuminate the scene **112**. Moreover, this control can be differential, in that different beams **208** are controlled independently of other beams **208**. Accordingly, embodiments of the present invention can comprise imaging cameras or other systems that provide an illumination source and receive a reflected signal. More particularly, embodiments of the present invention can include any system with a multiple pixel or element detector **324** that provides feedback to a beam forming device **316** that is capable of implementing individual control of one or more beams **208** used to illuminate a scene **112**.

Although exemplary embodiments of LIDAR systems **104** have been described that incorporate a beam forming device **316** comprising one or more acoustic optic modulators **330**, other configurations are possible. For example, a beam forming device **316** may comprise a liquid crystal device to control the intensity of individual beams **208** within an illumination pattern **206**. In accordance with still other embodiments, the beam forming device **316** may comprise an electro-optic

17

device, comprising a crystal having an index of refraction that can be controlled according to applied voltage. Beam forming can be performed by arrays of lasers or fiber-coupled lasers. Moreover, multiple electro-optic devices can be used to provide a beam steering device **316**. As a further example, micro-electrical mechanical systems (MEMS) microarrays can be used as a beam forming device **316**. In addition, although portions of the description have related to the production of illumination patterns **206** that can be selected or modified in a random access manner such that the characteristics of a particular target scene **112** are accommodated, it should be appreciated that a pattern **206** can also include deflected beams **210** that are moved from frame to frame. In particular, scan patterns can be produced in which any number of deflected beams **210** are moved from frame to frame.

As mentioned above, embodiments of the present invention can also include beam forming devices **316** that include controllable panels. More particularly, such beam forming devices **316** can comprise panels that selectively transmit or reject light produced by a light source **304**. Examples of such beam forming devices **316** include LCD panels. In accordance with still other embodiments, a beam forming device **316** can comprise controllable mirrors. Such mirrors can include steered mirrors. In accordance with still other embodiments, deformable mirrors can be provided to control the illumination pattern **206** used to illuminate a scene **112** with light from a light source **304**.

In accordance with still other embodiments, a plurality of light sources **304** can be associated with a plurality of beam forming devices **316**. For example, each light source **304** can comprise a laser, and each laser can be associated with a beam steering device **316** comprising a pair of AO beam deflectors **330**. Such embodiments can allow for random access selection of illumination patterns **206**.

In accordance with still other embodiments, different beams **208** having different polarization states can be produced simultaneously or sequentially. In particular, a beam **208** output by a beam steering device **316** comprising an AO beam deflector **330** is inherently polarized in a particular state. The polarization of a beam **208** output by an imaging system **104** in accordance with embodiments of the present invention can be used in interrogating targets, where those targets have a reflectivity that is polarization sensitive. For example, changes to the polarization state of beams **208** can be used in connection with atmospheric constituent detection and differentiation of biological species. In order to take advantage of polarization state information, illumination patterns **206** in which multiple beams **208** are generated from each pulse of the light source **304** and are projected by the beam steering device **316** at different angles. The different beams **208**, having different polarization states, can then be co-aligned using subsequent optics so that the two distinct states are simultaneously projected to the same location in the target scene **112**. As another example, beams **210** can be produced in which the polarization state of any or all of the beams **210** is modulated on a shot to shot basis. For instance, a beam of one polarization state on one shot of the laser can be followed by a beam having a different polarization state on the next shot of the laser, with both beams **210** being directed to the same location within the target scene **112**.

As can be appreciated by one of skill in the art, different illumination patterns are desirable in different scenarios. For example, in a rendezvous and docking scenario, embodiments of the present invention can be operated to produce an illumination pattern **206** that is different for different phases

18

of a rendezvous and docking procedure. In addition, search times can be improved by using different illumination patterns.

Embodiments of the present invention, and in particular embodiments that utilize a beam steering device **316** that include a fine adjustable beam angle, including a beam steering device **316** comprising an AO beam deflector **330**, can be used to perform boresighting of the LIDAR system **104**. More particularly, the electronic steering of one or more deflected or steered beams **210** permits alignment or boresighting of the illumination light **116** with the multiple pixel detector **326**. In accordance with still other embodiments, electronic steering of one or more deflected beams **210** can be used to perform boresighting of illumination light **116** even in connection with a detector comprising a single pixel (i.e., in connection with a single element detector). Accordingly, mechanical steering mechanisms can be simplified or eliminated, which can reduce weight, cost and complexity of the LIDAR system **104**.

The foregoing discussion of the invention has been presented for purposes of illustration and description. Further, the description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications commensurate with the above teachings, within the skill or knowledge of the relevant art, are within the scope of the present invention. The embodiments described hereinabove are further intended to explain the best mode presently known of practicing the invention and to enable others skilled in the art to utilize the invention in such or in other embodiments and with various modifications required by the particular application or use of the invention. It is intended that the appended claims be construed to include alternative embodiments to the extent permitted by the prior art.

What is claimed is:

1. A method for illuminating a scene, comprising:

outputting light in a first illumination pattern, wherein the first illumination pattern includes a first plurality of beams that illuminate the scene at a first point in time; determining at least one of an intensity of light reflected from the scene as a result of illumination of the scene by the first illumination pattern or a range to an area of the scene determined from light included in the first illumination pattern;

in response to determining the at least one of an intensity of light reflected from the scene as a result of illumination of the scene by the first illumination pattern or a range to an area of the scene determined from light included in the first illumination pattern, outputting light in a second illumination pattern, wherein the second illumination pattern includes a second plurality of beams that illuminate the scene at a second point in time, and wherein the first illumination pattern differs from the second illumination pattern.

2. The method of claim 1, wherein outputting light in a second illumination pattern includes steering at least one of the beams included in the first plurality of beams.

3. The method of claim 2, wherein outputting the second plurality of beams includes controlling at least a first beam included in the first plurality of beams, and wherein controlling at least a first beam included in the first plurality of beams includes at least one of:

controlling an intensity of the first beam, controlling the first beam such that the first beam is incident on a selected area within the scene, and controlling the first beam such that the first beam is incident on an area adjacent the scene.

19

4. The method of claim 1, wherein the second illumination pattern is output in response to determining an intensity of light received at a first element of a multiple element detector as a result of illumination of the scene by the first illumination pattern.

5. The method of claim 4, wherein determining an intensity of light reflected from the scene while the scene is illuminated by the first illumination pattern includes receiving a signal from at least the first element of the multiple element detector.

6. The method of claim 5, wherein the signal received from the first element of the multiple element detector is greater than a threshold amount,

wherein a signal received from a second element of the multiple element detector is less than the threshold amount,

wherein outputting light in a second illumination pattern includes reducing an intensity of a first beam illuminating an area of the scene from which light received by the first element of the multiple element detector is reflected as compared to the intensity of a corresponding beam in the first illumination pattern, and

wherein outputting light in a second illumination pattern does not include reducing an intensity of a second beam illuminating an area of the scene from which light received by the second element of the multiple element detector is reflected as compared to the intensity of a corresponding beam in the first illumination pattern.

7. The method of claim 5, further comprising:

directing the second illumination pattern to the scene; in response to detecting that an intensity of light reflected from the scene while the scene is illuminated by the second illumination pattern exceeds a threshold amount, controlling the second illumination pattern to produce a third illumination pattern, wherein the second illumination pattern differs from the third illumination pattern.

8. The method of claim 5, wherein the intensity of light detected by the first element of the multiple element detector while the scene is illuminated by the second illumination pattern is less than the intensity of light detected by the first element of the multiple element detector while the scene is illuminated by the first illumination pattern.

9. The method of claim 2, wherein outputting light in a second illumination pattern includes steering a first one of the beams independently of a second one of the beams in the first plurality of beams.

10. The method of claim 1, wherein outputting light in a second illumination pattern includes electronically altering the first illumination pattern to create the second illumination pattern.

20

11. A lidar system, including:

a light source, wherein the light source generates at least a first light pulse comprising a first beam of light;

a first acoustic optic modulator, wherein the beam of light generated by the light source is provided to the first acoustic optic modulator;

a first radio frequency driver, wherein a selected number of radio frequencies are output to the first acoustic optic modulator by the first radio frequency driver, and wherein a first illumination pattern including a number of steerable beams corresponding to the selected number of radio frequencies are output from the first acoustic optic modulator in response to the selected number of radio frequencies at a first point in time;

a focal plane array;

a controller, wherein the controller is in communication with at least the light source, the first radio frequency driver, and the focal plane array, wherein a time at which the first light pulse is generated by the light source and a time at which a return signal comprising at least some light from the first light pulse is received at the focal plane array provides range information, wherein information regarding an intensity of the return signal is provided to the controller, wherein the information regarding an intensity of the return signal is used to determine at least one parameter of a control signal provided by the controller to the first radio frequency driver, wherein the at least one parameter of the control signal provided by the controller to the first radio frequency driver is applied in outputting a second illumination pattern at a second point in time, and wherein the first and second illumination patterns are different from one another.

12. The system of claim 11, wherein the at least one parameter of a control signal includes an intensity of a first steerable beam output from the first acoustic optic modulator and an intensity of a second steerable beam output from the first acoustic optic modulator, wherein the intensity of the first steerable beam relative to the second steerable beam is changed between the first light pulse generated by the light source and a second pulse generated by the light source.

13. The system of claim 11, wherein the at least one parameter of a control signal includes a steering angle of first, second and third steerable beams output from the first acoustic optic modulator, wherein the first steerable beam is steered independently of the second and third steerable beams.

* * * * *